


Test_Mode	GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

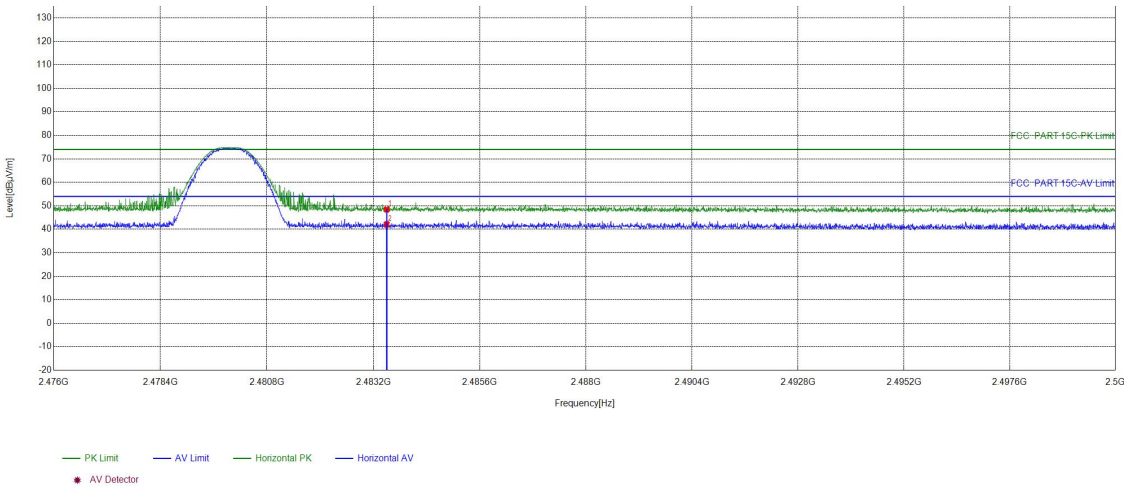

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.13	48.42	74.00	25.58	PASS	Horizontal	PK
2	2483.5	16.29	25.85	42.14	54.00	11.86	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

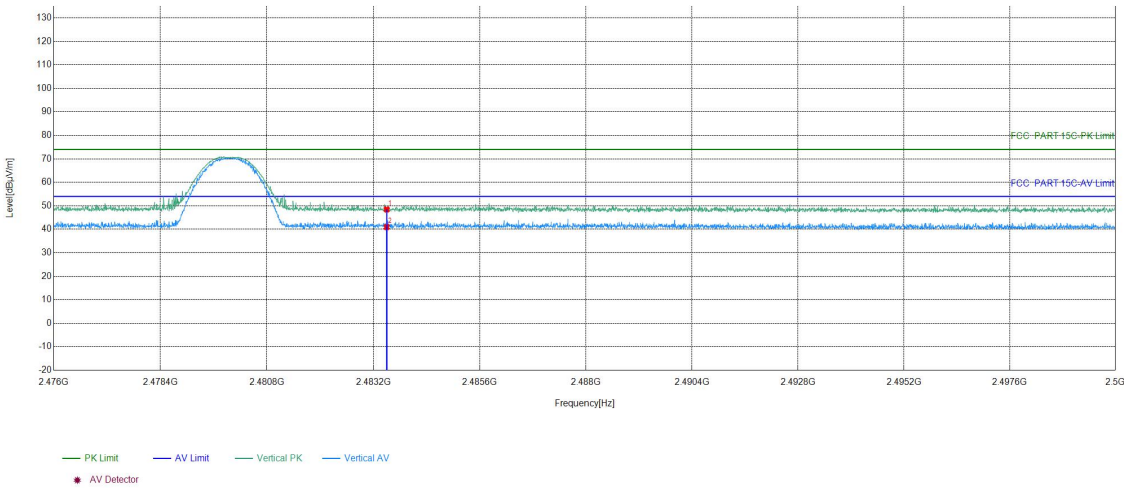

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.17	48.46	74.00	25.54	PASS	Vertical	PK
2	2483.5	16.29	24.66	40.95	54.00	13.05	PASS	Vertical	AV

Test_Mode	$\pi/4$ DQPSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

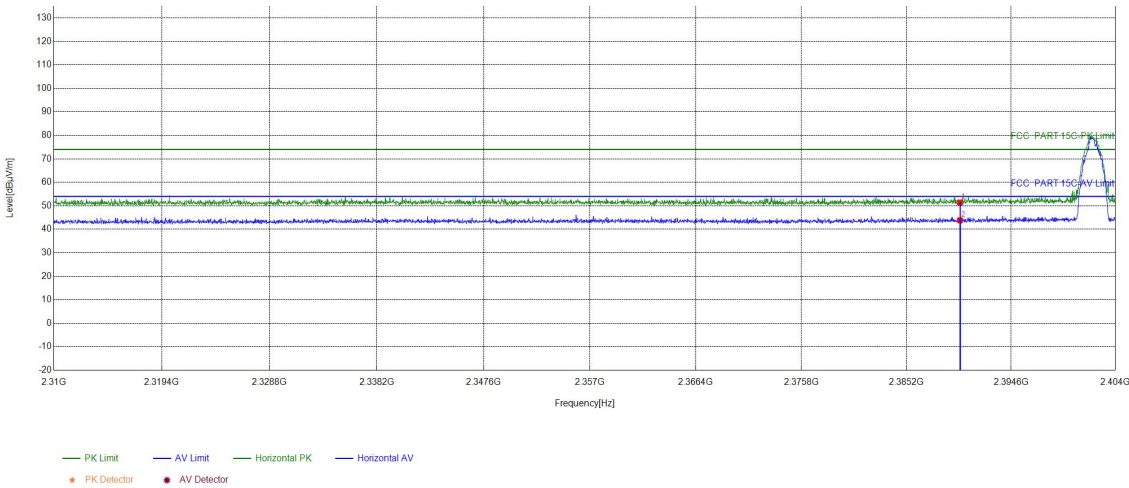

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.45	51.41	74.00	22.59	PASS	Horizontal	PK
2	2390	15.96	27.85	43.81	54.00	10.19	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

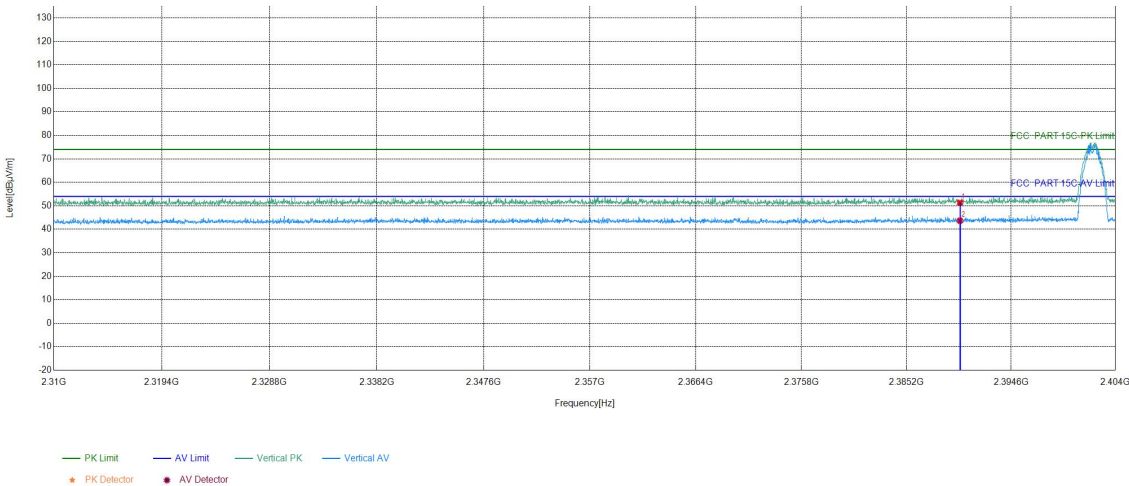

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.35	51.31	74.00	22.69	PASS	Vertical	PK
2	2390	15.96	27.69	43.65	54.00	10.35	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

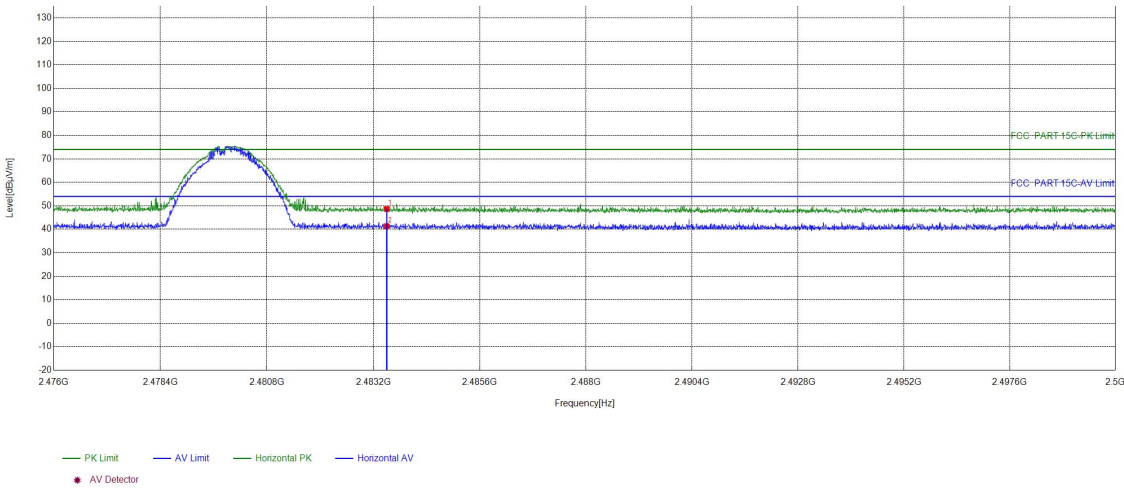

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.37	48.66	74.00	25.34	PASS	Horizontal	PK
2	2483.5	16.29	25.00	41.29	54.00	12.71	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

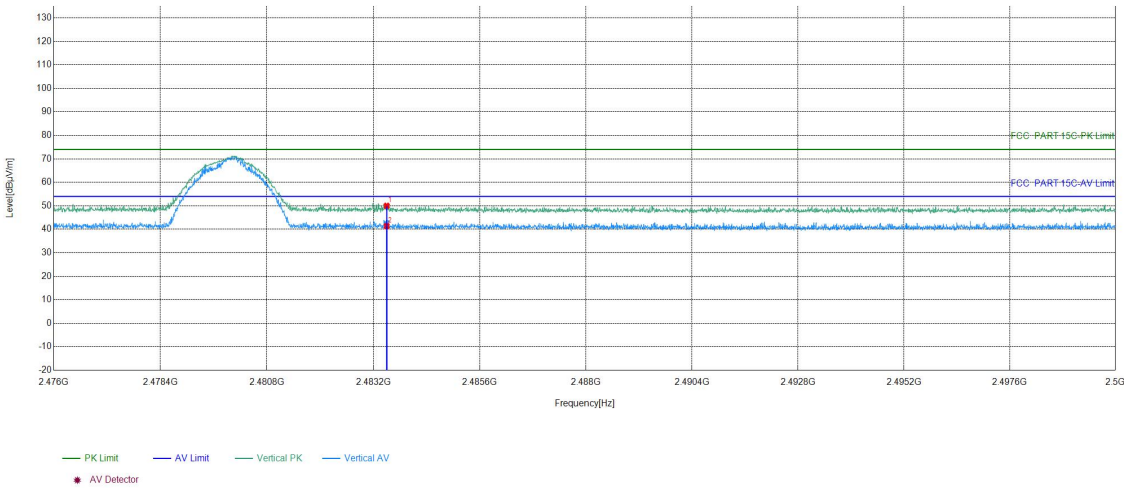

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.71	50.00	74.00	24.00	PASS	Vertical	PK
2	2483.5	16.29	25.07	41.36	54.00	12.64	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

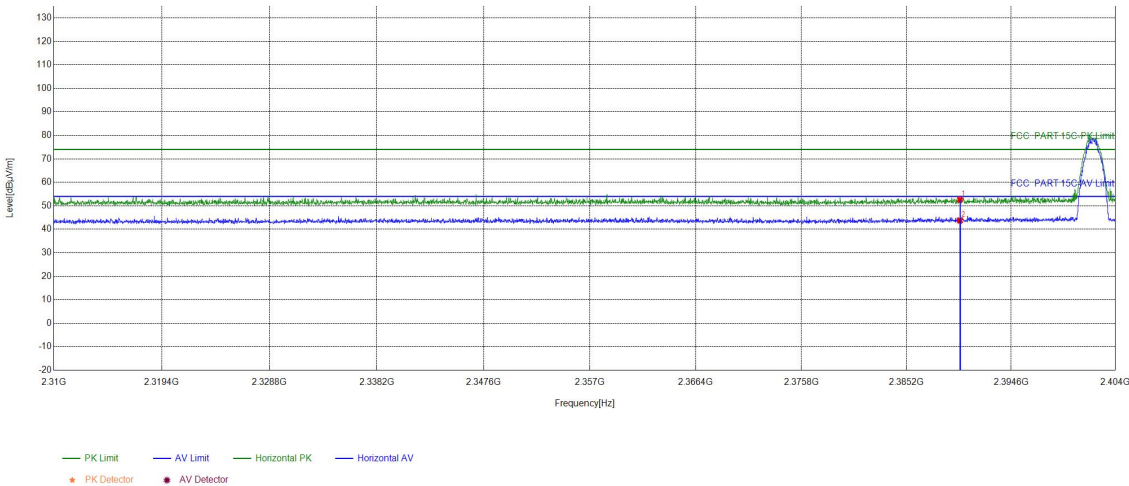

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.64	52.60	74.00	21.40	PASS	Horizontal	PK
2	2390	15.96	27.75	43.71	54.00	10.29	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

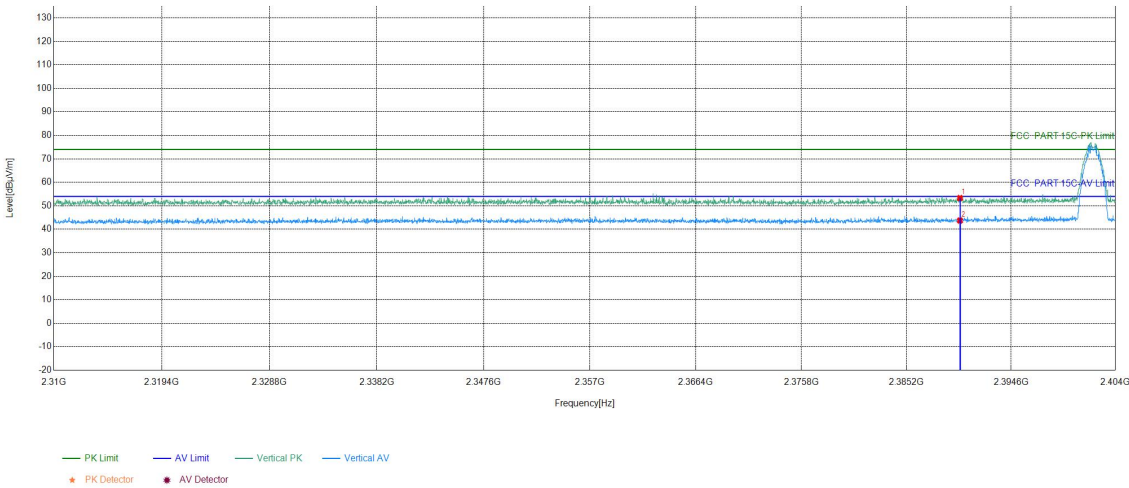

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.34	53.30	74.00	20.70	PASS	Vertical	PK
2	2390	15.96	27.76	43.72	54.00	10.28	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

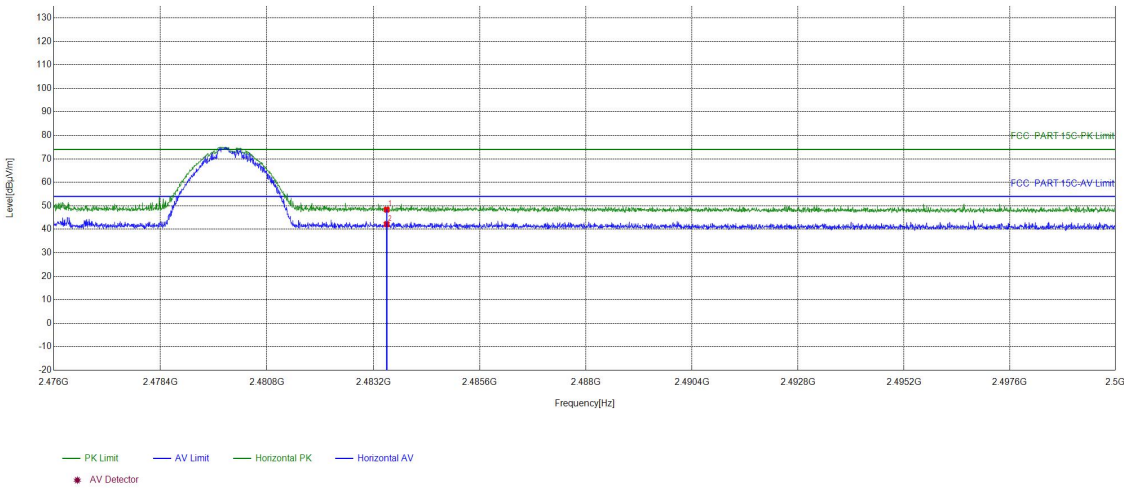

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.09	48.38	74.00	25.62	PASS	Horizontal	PK
2	2483.5	16.29	25.87	42.16	54.00	11.84	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31

Test Graph

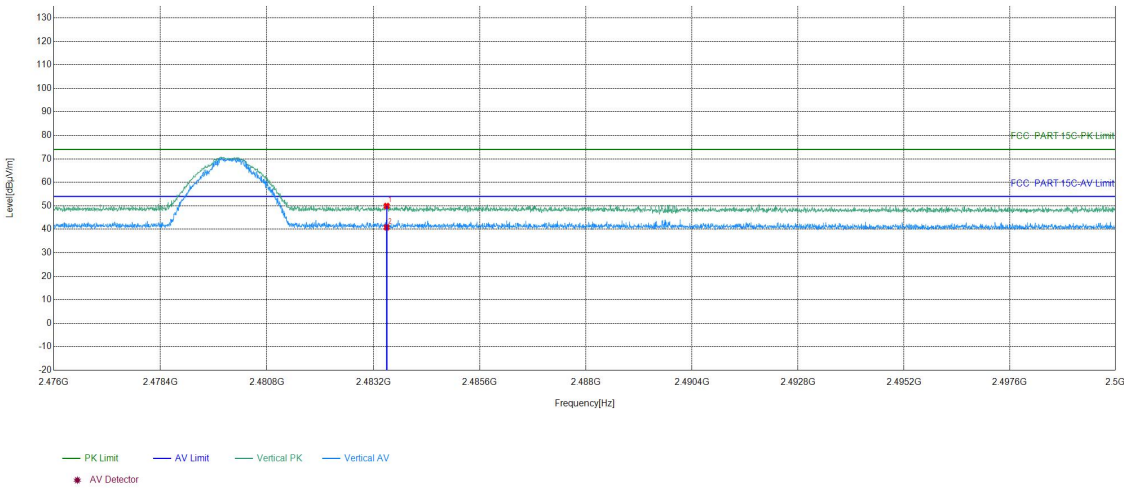

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.65	49.94	74.00	24.06	PASS	Vertical	PK
2	2483.5	16.29	24.53	40.82	54.00	13.18	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S819713

6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S819713 .

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***