

**Motorola Mobility LLC**

Application  
For  
Certification

**FCC ID: IHDT6QA1**

**MV520**

**Model: MV520**

**2.4GHz Transceiver**

**Report No.: 140804001SZN-001**

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-13]

Prepared and Checked by:

Approved by:

Sign on file

*Leo Lai*  
*Project Engineer*

---

*Andy Yan*  
*Senior Project Engineer*  
*Date: September 10, 2014*

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C\_TX\_b  
Report No.: 140804001SZN-001

**Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch**

6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: [www.china.intertek-etlsemko.com](http://www.china.intertek-etlsemko.com)

### LIST OF EXHIBITS

#### *INTRODUCTION*

|                   |                           |
|-------------------|---------------------------|
| <i>EXHIBIT 1:</i> | General Description       |
| <i>EXHIBIT 2:</i> | System Test Configuration |
| <i>EXHIBIT 3:</i> | Emission Results          |
| <i>EXHIBIT 4:</i> | Equipment Photographs     |
| <i>EXHIBIT 5:</i> | Product Labelling         |
| <i>EXHIBIT 6:</i> | Technical Specifications  |
| <i>EXHIBIT 7:</i> | Instruction Manual        |
| <i>EXHIBIT 8:</i> | Miscellaneous Information |
| <i>EXHIBIT 9:</i> | Test Equipment List       |

# INTERTEK TESTING SERVICES

## MEASUREMENT/TECHNICAL REPORT

Motorola Mobility LLC

Model: MV520

FCC ID: IHDT6QA1

This report concerns (check one:)      Original Grant X      Class II Change \_\_\_\_\_

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes \_\_\_\_\_      No X

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?      Yes \_\_\_\_\_      No X

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-13 Edition] provision.

Report prepared by:

Leo Lai  
Intertek Testing Services Shenzhen Ltd.  
Kejiyuan Branch  
6F, Block D, Huahan Building, Langshan Road,  
Nanshan District, Shenzhen, P. R. China  
Phone: (86 755) 8614 0661  
Fax: (86 755) 8601 6751

---

# INTERTEK TESTING SERVICES

---

## Table of Contents

|                                                  |    |
|--------------------------------------------------|----|
| <b>1.0 General Description</b>                   | 2  |
| 1.1 Product Description                          | 2  |
| 1.2 Related Submittal(s) Grants                  | 2  |
| 1.3 Test Methodology                             | 2  |
| 1.4 Test Facility                                | 2  |
| <b>2.0 System Test Configuration</b>             | 4  |
| 2.1 Justification                                | 4  |
| 2.2 EUT Exercising Software                      | 4  |
| 2.3 Special Accessories                          | 4  |
| 2.4 Equipment Modification                       | 4  |
| 2.5 Measurement Uncertainty                      | 5  |
| 2.6 Support Equipment List and Description       | 5  |
| <b>3.0 Emission Results</b>                      | 7  |
| 3.1 Radiated Test Results                        | 8  |
| 3.1.1 Field Strength Calculation                 | 8  |
| 3.1.2 Radiated Emission Configuration Photograph | 9  |
| 3.1.3 Radiated Emissions                         | 9  |
| 3.1.4 Transmitter Spurious Emissions             | 12 |
| <b>4.0 Equipment Photographs</b>                 | 17 |
| <b>5.0 Product Labelling</b>                     | 19 |
| <b>6.0 Technical Specifications</b>              | 21 |
| <b>7.0 Instruction Manual</b>                    | 23 |
| <b>8.0 Miscellaneous Information</b>             | 25 |
| 8.1 Bandedge Plot                                | 26 |
| 8.2 Discussion of Pulse Desensitization          | 28 |
| 8.3 Transmitter Duty Cycle Calculation           | 29 |
| 8.4 Emissions Test Procedures                    | 30 |
| <b>9.0 Test Equipment List</b>                   | 33 |

---

## INTERTEK TESTING SERVICES

---

### List of attached file

| Exhibit type          | File Description           | Filename            |
|-----------------------|----------------------------|---------------------|
| Test Report           | Test Report                | report.pdf          |
| Test Setup Photo      | Radiated Emission          | radiated photos.pdf |
| Test Report           | Bandedge Plot              | bandedge.pdf        |
| Test Report           | 20dB BW Plot               | bw.pdf              |
| External Photo        | External Photo             | external photos.pdf |
| Internal Photo        | Internal Photo             | internal photos.pdf |
| Block Diagram         | Block Diagram              | block.pdf           |
| Schematics            | Circuit Diagram            | circuit.pdf         |
| Operation Description | Technical Description      | descri.pdf          |
| Label/Location        | Label Artwork and Location | label.pdf           |
| User Manual           | User Manual                | manual.pdf          |
| Cover Letter          | Confidentiality Letter     | request.pdf         |
| Cover Letter          | Letter of Agency           | agency.pdf          |

**EXHIBIT 1**

**GENERAL DESCRIPTION**

---

## INTERTEK TESTING SERVICES

---

### 1.0 General Description

#### 1.1 Product Description

The equipment under test (EUT) is a MV520 with Bluetooth function operating in 2402-2480MHz. The EUT is powered by DC 3.7V rechargeable battery. For more detail information pls. refer to the user manual.

Antenna Type: Integral antenna

Bluetooth Version: 3.0 + EDR

Modulation Type: GFSK,  $\pi/4$ -DQPSK and 8-DPSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the MV520 which has Bluetooth function, and there is no corresponding unit for certification.

#### 1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). Radiated emission measurement was performed in Semi-anechoic chamber. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

#### 1.4 Test Facility

The Semi-anechoic chamber used to collect the radiated data is **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 242492).

**EXHIBIT 2**  
**SYSTEM TEST CONFIGURATION**

## INTERTEK TESTING SERVICES

---

### 2.0 System Test Configuration

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The EUT was powered by fully charged DC 3.7V rechargeable battery during the test.

All packets DH1, DH3 & DH5 mode in modulation type GFSK,  $\pi/4$ -DQPSK and 8-DPSK, were tested and only the worst data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.

The unit was operated standalone and placed in the centre of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

#### 2.3 Special Accessories

No special accessories used.

#### 2.4 Equipment Modification

Any modifications installed previous to testing by Motorola Mobility LLC will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Kejiyuan Branch.

## INTERTEK TESTING SERVICES

---

### 2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 2.6 Support Equipment List and Description

| Description | Manufacturer | Model No. |
|-------------|--------------|-----------|
| iPod        | Apple        | A1367     |

**EXHIBIT 3**  
**EMISSION RESULTS**

### 3.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

---

## INTERTEK TESTING SERVICES

---

### 3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where      FS = Field Strength in dB $\mu$ V/m  
             RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V  
             CF = Cable Attenuation Factor in dB  
             AF = Antenna Factor in dB  
             AG = Amplifier Gain in dB  
             PD = Pulse Desensitization in dB  
             AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

RA = 62.0 dB $\mu$ V  
AF = 7.4 dB  
CF = 1.6 dB  
AG = 29.0 dB  
PD = 0 dB  
AV = -10 dB  
 $FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$

Level in  $\mu$ V/m = Common Antilogarithm  $[(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$

## INTERTEK TESTING SERVICES

---

### 3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

### 3.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission  
at  
952.500 MHz

Judgement: Passed by 16.0 dB

#### **TEST PERSONNEL:**

*Sign on file*

Leo Lai, Project Engineer  
*Typed/Printed Name*


August 18, 2014  
*Date*

## INTERTEK TESTING SERVICES


Applicant: Motorola Mobility LLC  
Model: MV520  
Sample: 1/1  
Worst Case Operating Mode: BT Link

Date of Test: August 18, 2014

### Horizontal

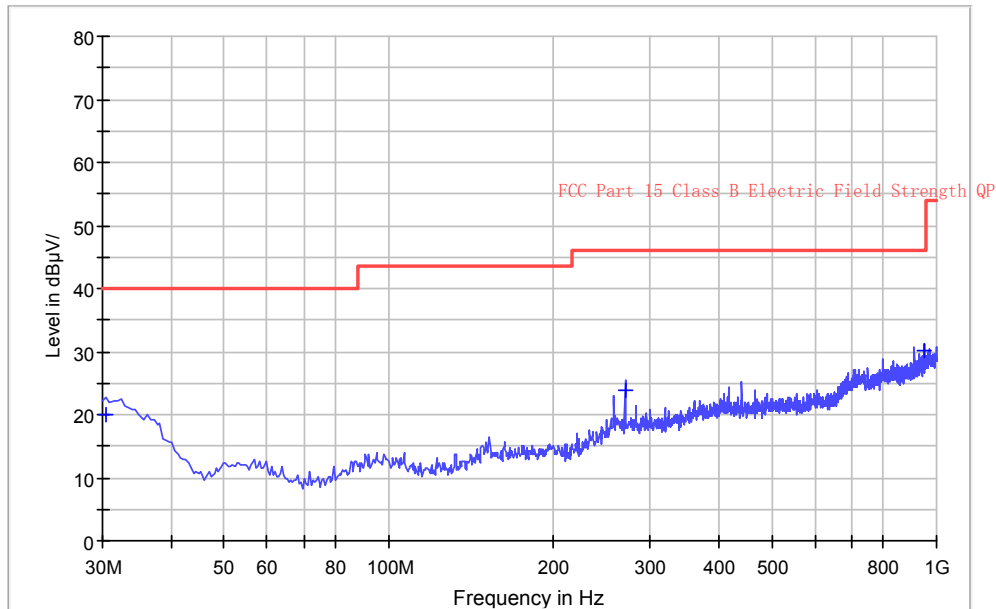

### Vertical

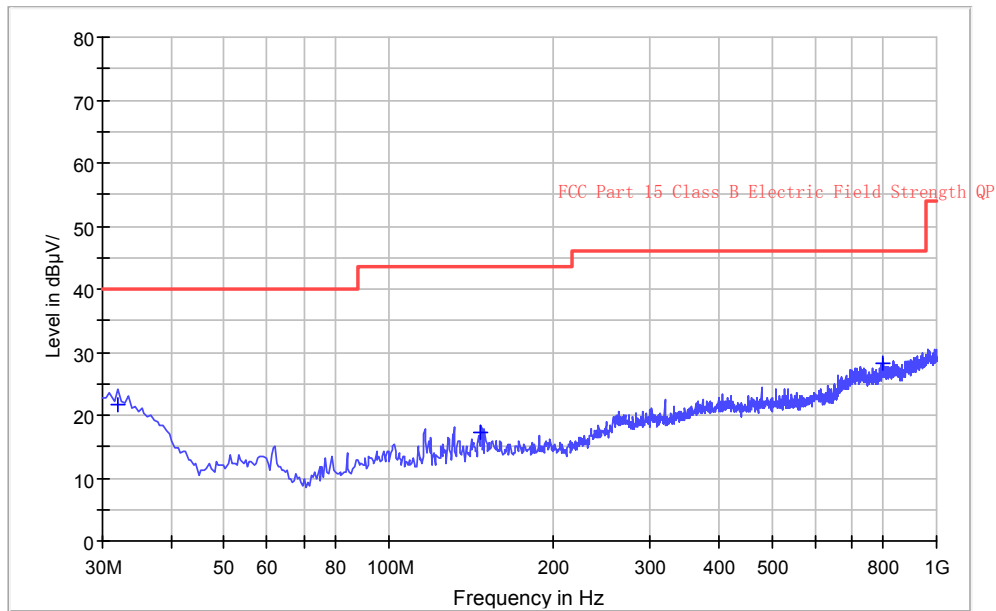

---

## INTERTEK TESTING SERVICES

---

Applicant: Motorola Mobility LLC  
Model: MV520  
Sample: 1/1  
Worst Case Operating Mode: BT Link

Date of Test: August 18, 2014

Table 1

### Radiated Emissions

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|--------------------|----------------------|-------------|
| Horizontal   | 30.480          | 34.5           | 20.0              | 5.6                 | 20.1               | 40.0                 | -19.9       |
| Horizontal   | 270.060         | 35.5           | 20.0              | 8.4                 | 23.9               | 46.0                 | -22.1       |
| Horizontal   | 952.500         | 38.3           | 20.0              | 11.7                | 30.0               | 46.0                 | -16.0       |
| Vertical     | 31.920          | 23.5           | 20.0              | 18.3                | 21.8               | 40.0                 | -18.2       |
| Vertical     | 147.370         | 21.7           | 20.0              | 15.7                | 17.4               | 43.5                 | -26.1       |
| Vertical     | 801.150         | 42.9           | 20.0              | 5.4                 | 28.3               | 46.0                 | -17.7       |

- NOTES: 1. Quasi-Peak detector is used except for others stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. All emissions are below the QP limit.

## INTERTEK TESTING SERVICES

---

### 3.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission  
at  
9764.000 MHz

Judgement: Passed by 13.1 dB

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

#### **TEST PERSONNEL:**

*Sign on file*

Leo Lai, Project Engineer  
*Typed/Printed Name*

August 18, 2014  
*Date*

## INTERTEK TESTING SERVICES

Applicant: Motorola Mobility LLC  
Model: MV520  
Sample: 1/1  
Worst Case Operating Mode: Transmitting

Date of Test: August 18, 2014

Table 2

### Radiated Emissions

(2402MHz)

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|--------------------|---------------------------|-------------|
| Vertical     | 2402.000        | 104.4          | 36.7              | 28.5                | 96.2               | 114.0                     | -17.8       |
| Vertical     | 4804.000        | 67.6           | 36.7              | 28.5                | 59.4               | 74.0                      | -14.6       |
| Vertical     | 7206.000        | 61.4           | 36.1              | 33.1                | 58.4               | 74.0                      | -15.6       |
| Vertical     | 9608.000        | 59.2           | 36.2              | 37.8                | 60.8               | 74.0                      | -13.2       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (-dB) | Net at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|----------------------|--------------------|------------------------------|-------------|
| Vertical     | 2402.000        | 104.4          | 36.7              | 28.5                | 22.5                 | 73.7               | 94.0                         | -20.3       |
| Vertical     | 4804.000        | 67.6           | 36.7              | 28.5                | 22.5                 | 36.9               | 54.0                         | -17.1       |
| Vertical     | 7206.000        | 61.4           | 36.1              | 33.1                | 22.5                 | 35.9               | 54.0                         | -18.1       |
| Vertical     | 9608.000        | 59.2           | 36.2              | 37.8                | 22.5                 | 38.3               | 54.0                         | -15.7       |

- NOTES:
1. Peak detector is used except for others stated.
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Leo Lai

---

## INTERTEK TESTING SERVICES

---

Applicant: Motorola Mobility LLC  
Model: MV520  
Sample: 1/1  
Worst Case Operating Mode: Transmitting

Date of Test: August 18, 2014

Table 3

### Radiated Emissions

(2441MHz)

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dB $\mu$ V/m) | Peak Limit at 3m (dB $\mu$ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|---------------------|--------------------------|---------------------------------|-------------|
| Vertical     | 2441.000        | 105.2                | 36.7              | 28.5                | 97.0                     | 114.0                           | -17.0       |
| Vertical     | 4882.000        | 67.0                 | 36.7              | 28.5                | 58.8                     | 74.0                            | -15.2       |
| Vertical     | 7323.000        | 62.5                 | 36.1              | 33.1                | 59.5                     | 74.0                            | -14.5       |
| Vertical     | 9764.000        | 59.3                 | 36.2              | 37.8                | 60.9                     | 74.0                            | -13.1       |

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (-dB) | Net at 3m (dB $\mu$ V/m) | Average Limit at 3m (dB $\mu$ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|---------------------|----------------------|--------------------------|------------------------------------|-------------|
| Vertical     | 2441.000        | 105.2                | 36.7              | 28.5                | 22.5                 | 74.5                     | 94.0                               | -19.5       |
| Vertical     | 4882.000        | 67.0                 | 36.7              | 28.5                | 22.5                 | 36.3                     | 54.0                               | -17.7       |
| Vertical     | 7323.000        | 62.5                 | 36.1              | 33.1                | 22.5                 | 37.0                     | 54.0                               | -17.0       |
| Vertical     | 9764.000        | 59.3                 | 36.2              | 37.8                | 22.5                 | 38.4                     | 54.0                               | -15.6       |

- NOTES:
1. Peak detector is used except for others stated.
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Leo Lai

## INTERTEK TESTING SERVICES

Applicant: Motorola Mobility LLC  
Model: MV520  
Sample: 1/1  
Worst Case Operating Mode: Transmitting

Date of Test: August 18, 2014

Table 4

### Radiated Emissions

(2480MHz)

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dB $\mu$ V/m) | Limit at 3m (dB $\mu$ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|---------------------|--------------------------|----------------------------|-------------|
| Vertical     | 2480.000        | 105.7                | 36.7              | 28.6                | 97.6                     | 114.0                      | -16.4       |
| Vertical     | 4960.000        | 68.9                 | 36.7              | 28.6                | 60.8                     | 74.0                       | -13.2       |
| Vertical     | 7440.000        | 61.2                 | 36.1              | 33.4                | 58.5                     | 74.0                       | -15.5       |
| Vertical     | 9920.000        | 58.3                 | 36.3              | 38.2                | 60.2                     | 74.0                       | -13.8       |

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (-dB) | Net at 3m (dB $\mu$ V/m) | Average Limit at 3m (dB $\mu$ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|---------------------|----------------------|--------------------------|------------------------------------|-------------|
| Vertical     | 2480.000        | 105.7                | 36.7              | 28.6                | 22.5                 | 75.1                     | 94.0                               | -18.9       |
| Vertical     | 4960.000        | 68.9                 | 36.7              | 28.6                | 22.5                 | 38.3                     | 54.0                               | -15.7       |
| Vertical     | 7440.000        | 61.2                 | 36.1              | 33.4                | 22.5                 | 36.0                     | 54.0                               | -18.0       |
| Vertical     | 9920.000        | 58.3                 | 36.3              | 38.2                | 22.5                 | 37.7                     | 54.0                               | -16.3       |

- NOTES:
1. Peak detector is used except for others stated.
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Leo Lai

**EXHIBIT 4**  
**EQUIPMENT PHOTOGRAPHS**

### 4.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

**EXHIBIT 5**  
**PRODUCT LABELLING**

### 5.0 Product Labelling

For electronic filing, the FCC ID Number is in the user manual which is saved with filename: manual.pdf.

**EXHIBIT 6**  
**TECHNICAL SPECIFICATIONS**

### 6.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

**EXHIBIT 7**  
**INSTRUCTION MANUAL**

### 7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

**EXHIBIT 8**  
**MISCELLANEOUS INFORMATION**

### 8.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

---

## INTERTEK TESTING SERVICES

---

### 8.1 Bandedge Plot

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bandedge.pdf. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

#### Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

#### **(i) Lower channel 2402MHz:**

Peak Resultant field strength = Fundamental emissions (peak value) – delta  
from the bandedge plot

$$\begin{aligned} &= 96.2 \text{ dB}\mu\text{V/m} - 33.1 \text{ dB} \\ &= 63.1 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (Average value) –  
delta from the bandedge plot

$$\begin{aligned} &= 73.7 \text{ dB}\mu\text{V/m} - 33.1 \text{ dB} \\ &= 40.6 \text{ dB}\mu\text{V/m} \end{aligned}$$

#### **(ii) Upper channel 2480MHz:**

Peak Resultant field strength = Fundamental emissions (peak value) – delta  
from the bandedge plot

$$\begin{aligned} &= 97.6 \text{ dB}\mu\text{V/m} - 61.0 \text{ dB} \\ &= 36.6 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (Average value) –  
delta from the bandedge plot

$$\begin{aligned} &= 75.1 \text{ dB}\mu\text{V/m} - 61.0 \text{ dB} \\ &= 14.1 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB $\mu$ v/m (Peak Limit) and 54dB $\mu$ v/m (Average Limit).

## INTERTEK TESTING SERVICES

---

### 8.1 Bandedge Plot (cont'd)

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.1 Bandwidth

### 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

## INTERTEK TESTING SERVICES

---

### 8.3 Transmitter Duty Cycle Calculation, FCC Rule 15.35(b, c)

Based on the Bluetooth Specification Version 3.0+EDR, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length

Channel hop rate = 800 hops/second (AFH Mode)

Adjusted channel hop rate for DH5 mode = 133.33 hops/second

Time per channel hop =  $1 / 133.33 \text{ hops/second} = 7.5 \text{ ms}$

Time to cycle through all channels =  $7.5 \times 20 \text{ channels} = 150 \text{ ms}$

Number of times transmitter hits on one channel =  $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$

Worst case dwell time = 7.5 ms

Duty cycle connection factor =  $20\log_{10}(7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

## INTERTEK TESTING SERVICES

---

### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 - 2009.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

## INTERTEK TESTING SERVICES

---

### 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.4 - 2009.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz is used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

**EXHIBIT9**  
**TEST EQUIPMENT LIST**

---

## INTERTEK TESTING SERVICES

---

### 9.0 Test Equipment List

| Equipment No. | Equipment              | Manufacturer    | Model No.    | Serial No. | Cal. Date | Due Date  |
|---------------|------------------------|-----------------|--------------|------------|-----------|-----------|
| SZ061-03      | BiConiLog Antenna      | ETS             | 3142C        | 00066460   | 28-Jun-14 | 28-Jun-15 |
| SZ185-01      | EMI Receiver           | R&S             | ESCI         | 100547     | 10-Mar-14 | 10-Mar-15 |
| SZ061-07      | Pyramidal Horn Antenna | ETS             | 3160-09      | 00083067   | 27-Aug-13 | 27-Aug-14 |
| SZ061-08      | Horn Antenna           | ETS             | 3115         | 00092346   | 26-Oct-13 | 26-Oct-14 |
| SZ061-06      | Active Loop Antenna    | Electro-Metrics | EM-6876      | 217        | 29-Apr-14 | 29-Apr-15 |
| SZ056-03      | Spectrum Analyzer      | R&S             | FSP 30       | 101148     | 10-Mar-14 | 10-Mar-15 |
| SZ181-04      | Preamplifier           | Agilent         | 8449B        | 3008A02474 | 10-Mar-14 | 10-Mar-15 |
| SZ188-01      | Anechoic Chamber       | ETS             | RFD-F/A-100  | 4102       | 19-Apr-14 | 19-Apr-15 |
| SZ062-02      | RF Cable               | RADIAL          | RG 213U      | --         | 28-Jun-14 | 28-Jun-15 |
| SZ062-06      | RF Cable               | RADIAL          | 0.04-26.5GHz | --         | 1-Nov-13  | 1-Nov-14  |
| SZ062-12      | RF Cable               | RADIAL          | 0.04-26.5GHz | --         | 19-Apr-14 | 19-Oct-14 |
| SZ067-04      | Notch Filter           | Micro-Tronics   | BRM5070 2-02 | --         | 21-May-14 | 21-May-15 |