


Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

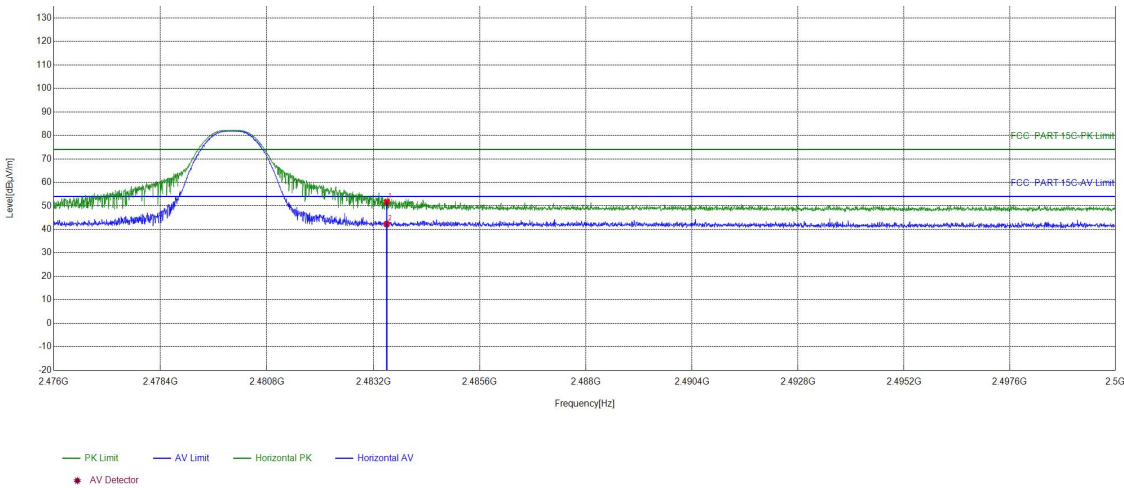

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.38	51.67	74.00	22.33	PASS	Horizontal	PK
2	2483.5	16.29	25.93	42.22	54.00	11.78	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

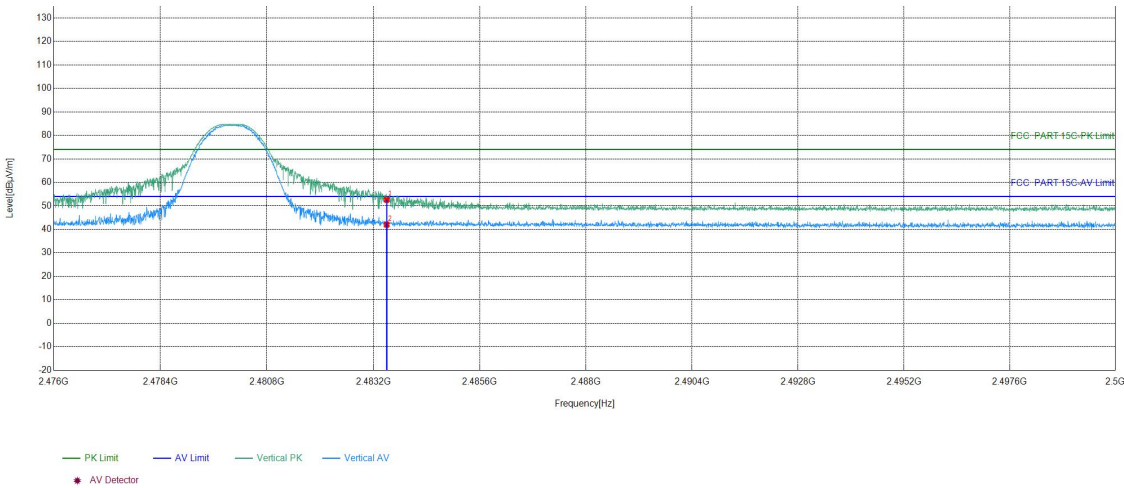

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.28	52.57	74.00	21.43	PASS	Vertical	PK
2	2483.5	16.29	25.70	41.99	54.00	12.01	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

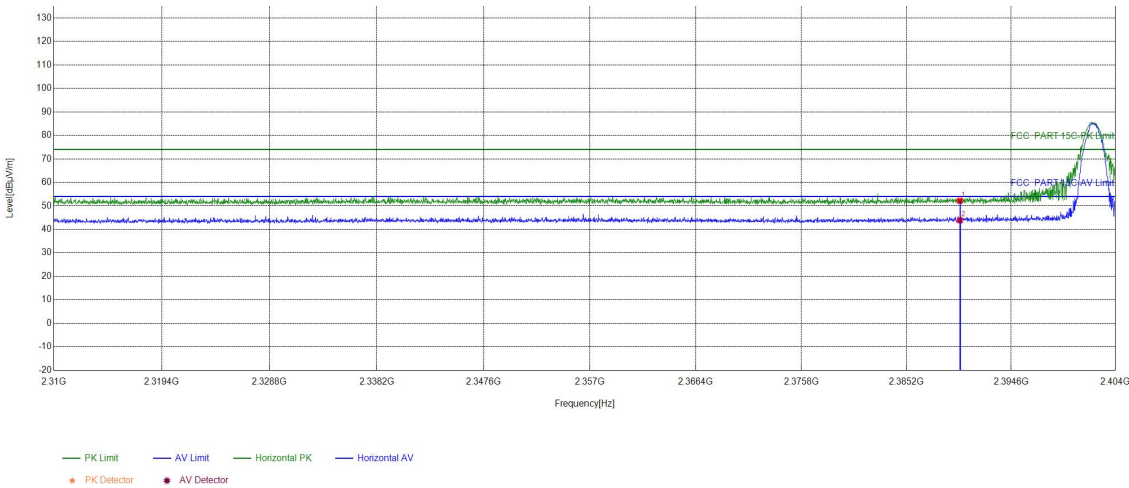

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.18	52.14	74.00	21.86	PASS	Horizontal	PK
2	2390	15.96	27.88	43.84	54.00	10.16	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

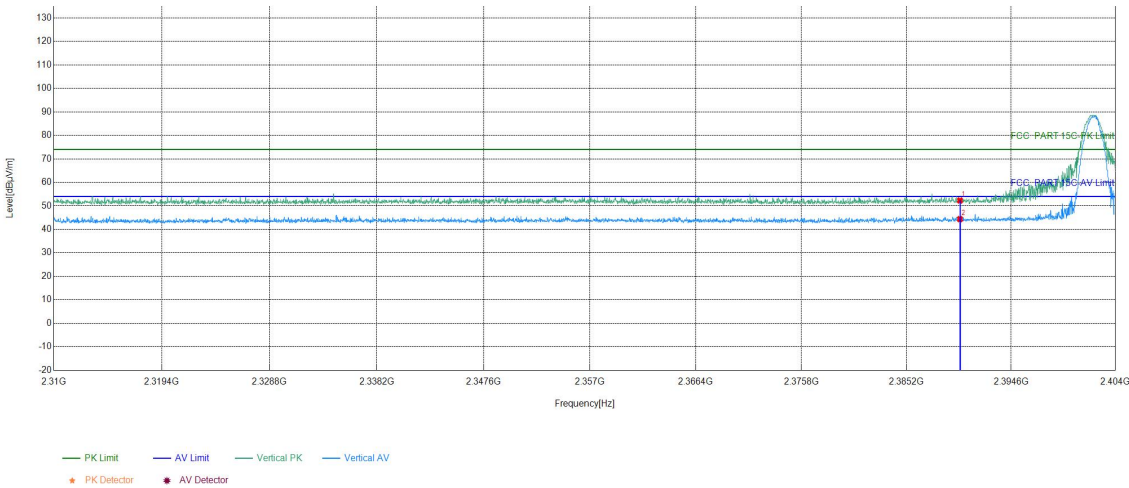

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.32	52.28	74.00	21.72	PASS	Vertical	PK
2	2390	15.96	28.37	44.33	54.00	9.67	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

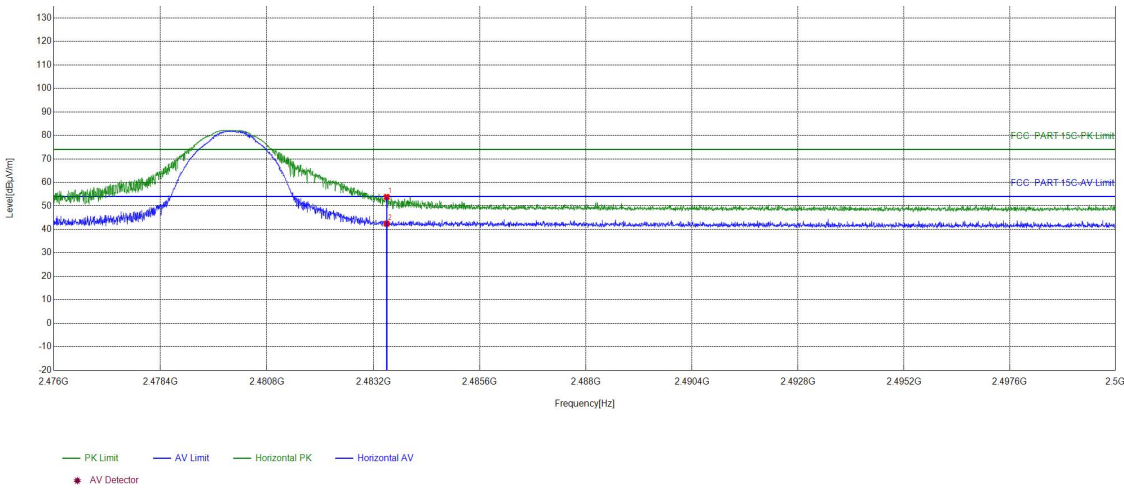

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.46	53.75	74.00	20.25	PASS	Horizontal	PK
2	2483.5	16.29	26.10	42.39	54.00	11.61	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

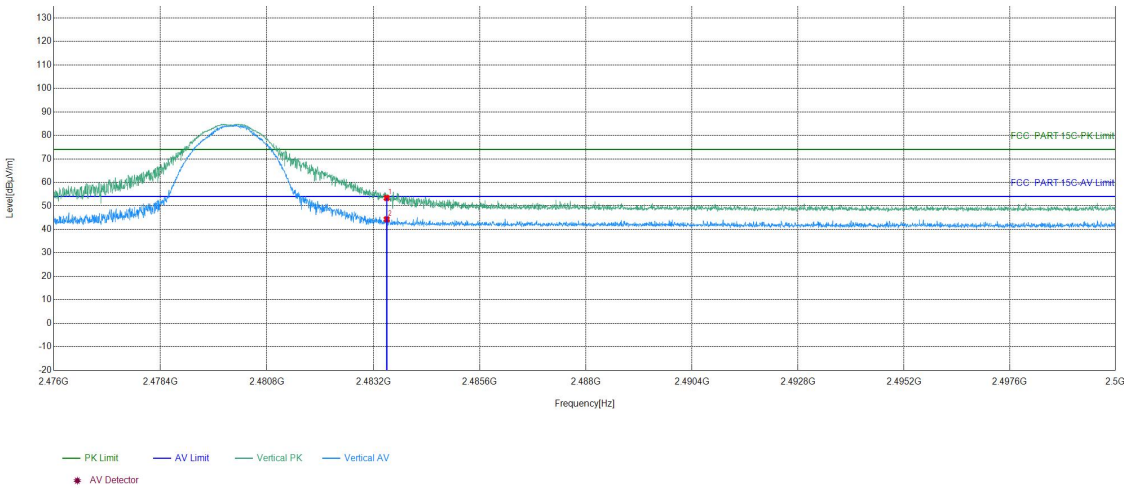

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.04	53.33	74.00	20.67	PASS	Vertical	PK
2	2483.5	16.29	27.96	44.25	54.00	9.75	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

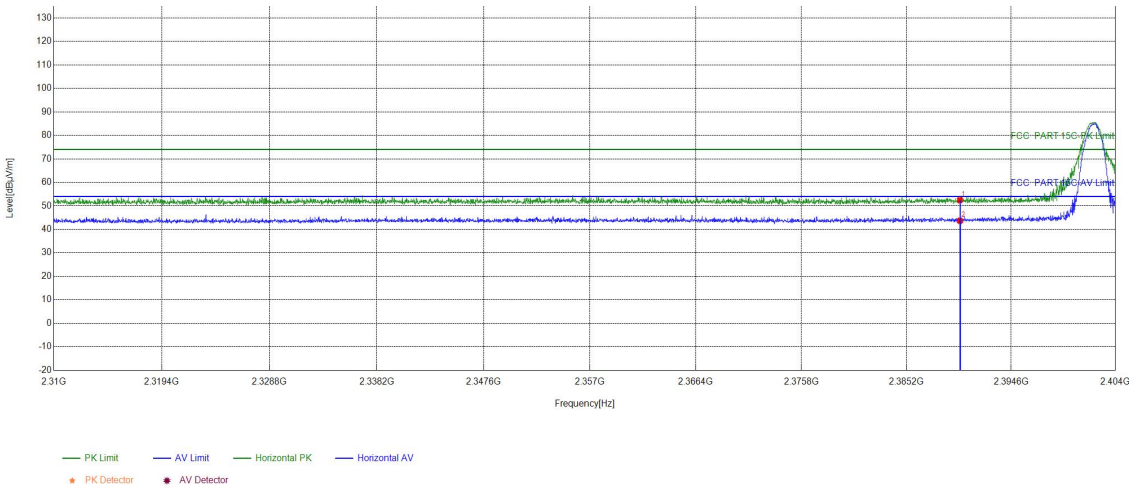

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.48	52.44	74.00	21.56	PASS	Horizontal	PK
2	2390	15.96	27.67	43.63	54.00	10.37	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

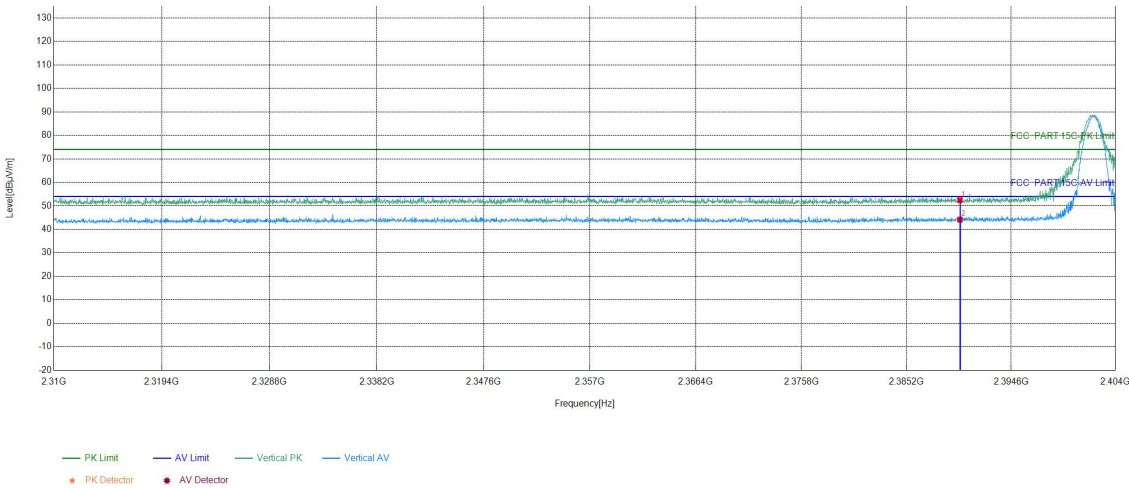

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.46	52.42	74.00	21.58	PASS	Vertical	PK
2	2390	15.96	28.15	44.11	54.00	9.89	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

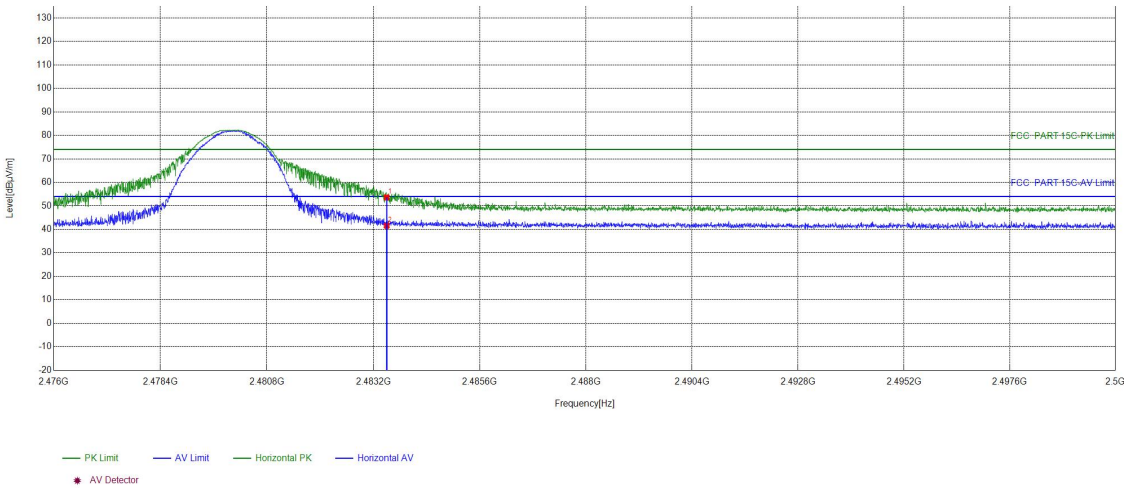

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.32	53.61	74.00	20.39	PASS	Horizontal	PK
2	2483.5	16.29	25.21	41.50	54.00	12.50	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31

Test Graph

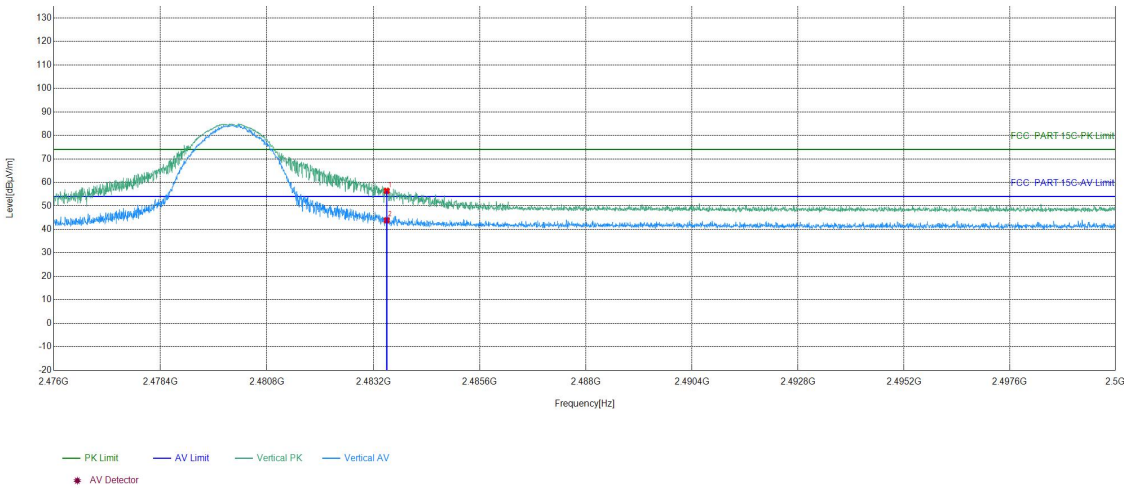

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	40.07	56.36	74.00	17.64	PASS	Vertical	PK
2	2483.5	16.29	27.53	43.82	54.00	10.18	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S816920

6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S816920.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***