

# **TEST REPORT**

**Report Number :** 16025792-E6V1

**Applicant :** Garmin International Inc  
1200 E 151ST ST  
OLATHE, KS  
US

**Model :** A05116

**FCC ID :** IPH-05116

**IC :** 1792A-05116

**EUT Description :** Portable Digital Transceiver

**Test Standard(s) :** DFS PORTION of FCC 47 CFR PART 15 SUBPART E  
DFS PORTION of ISED CANADA RSS-247 ISSUE 4

**Date Of Issue:**  
2026-01-09

**Prepared by:**  
UL VERIFICATION SERVICES INC.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 319-4000  
FAX: (510) 661-0888



Revision History

| Rev. | Issue Date | Revisions     | Revised By |
|------|------------|---------------|------------|
| V1   | 2026-01-09 | Initial Issue | --         |

## TABLE OF CONTENTS

|                                                      |           |
|------------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS</b>                | <b>4</b>  |
| <b>2. TEST METHODOLOGY</b>                           | <b>6</b>  |
| <b>3. SUMMARY OF TEST RESULTS</b>                    | <b>6</b>  |
| <b>4. REFERENCE DOCUMENTS</b>                        | <b>6</b>  |
| <b>5. FACILITIES AND ACCREDITATION</b>               | <b>6</b>  |
| <b>6. DECISION RULES AND MEASUREMENT UNCERTAINTY</b> | <b>7</b>  |
| 6.1. METROLOGICAL TRACEABILITY                       | 7         |
| 6.2. DECISION RULES                                  | 7         |
| 6.3. MEASUREMENT UNCERTAINTY                         | 7         |
| <b>7. DYNAMIC FREQUENCY SELECTION</b>                | <b>8</b>  |
| 7.1. OVERVIEW                                        | 8         |
| 7.1.1. LIMITS                                        | 8         |
| 7.1.2. TEST AND MEASUREMENT SYSTEM                   | 12        |
| 7.1.3. TEST AND MEASUREMENT SOFTWARE                 | 14        |
| 7.1.4. TEST ROOM ENVIRONMENT                         | 14        |
| 7.1.5. SETUP OF EUT                                  | 15        |
| 7.1.6. DESCRIPTION OF EUT                            | 16        |
| 7.2. RESULTS FOR 80 MHz BANDWIDTH                    | 18        |
| 7.2.1. TEST CHANNEL                                  | 18        |
| 7.2.2. RADAR WAVEFORM AND TRAFFIC                    | 18        |
| 7.2.3. OVERLAPPING CHANNEL TESTS                     | 21        |
| 7.2.4. MOVE AND CLOSING TIME                         | 21        |
| 7.2.5. NON-OCCUPANCY PERIOD                          | 25        |
| <b>8. SETUP PHOTOS</b>                               | <b>26</b> |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** Garmin International Inc.  
1200 East 151st Street  
Olathe, KS 66062-3426, USA

**EUT DESCRIPTION:** Portable Digital Transceiver

**MODEL:** A05116

**SERIAL NUMBER:** 3522388765

**DATE TESTED:** 2025-10-15

| APPLICABLE STANDARDS                        |              |
|---------------------------------------------|--------------|
| STANDARD                                    | TEST RESULTS |
| DFS Portion of 47 CFR Part 15 Subpart E     | Complies     |
| DFS Portion of ISSED CANADA RSS-247 Issue 4 | Complies     |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.

Approved & Released For  
UL Verification Services Inc. By:



---

Frank Ibrahim  
Staff Engineer  
CONSUMER TECHNOLOGY DIVISION  
UL Verification Services Inc.


Prepared By:



---

Henry Lau  
Project Engineer  
CONSUMER TECHNOLOGY DIVISION  
UL Verification Services Inc.

Reviewed by  
UL LLC. By:



---

John E. Manser III  
Laboratory Supervisor  
CONSUMER TECHNOLOGY DIVISION  
UL LLC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following standards/rules:

DFS portion of FCC 47 CFR Part 2  
FCC 47 CFR Part 15  
FCC KDB 789033  
KDB 905462 D02 and D03  
RSS-247 Issue 4

## 3. SUMMARY OF TEST RESULTS

| Requirement Description                     | Result   | Remarks |
|---------------------------------------------|----------|---------|
| DFS Portion of FCC 47 CFR PART 15 SUBPART E | Complies | None    |
| DFS Portion of ISED CANADA RSS-247 ISSUE 4  | Complies | None    |

## 4. REFERENCE DOCUMENTS

Measurements of transmitter parameters as referenced in this report and all other manufacturer's declarations relevant to the RF test requirements are documented in UL Verification Services report number 16025792-E5.

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for correctly integrating customer-provided data with measurements performed by UL Verification Services Inc.

## 5. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

|                                     | Address                                                  | ISED CABID | ISED Company Number | FCC Registration |
|-------------------------------------|----------------------------------------------------------|------------|---------------------|------------------|
| <input checked="" type="checkbox"/> | Building 1: 47173 Benicia Street, Fremont, CA 94538, USA | US0104     | 2324A               | 550739           |
| <input type="checkbox"/>            | Building 2: 47266 Benicia Street, Fremont, CA 94538, USA |            |                     |                  |
| <input type="checkbox"/>            | Building 3: 843 Auburn Court, Fremont, CA 94538, USA     |            |                     |                  |
| <input type="checkbox"/>            | Building 4: 47658 Kato Rd, Fremont, CA 94538, USA        |            |                     |                  |
| <input type="checkbox"/>            | Building 5: 47670 Kato Rd, Fremont, CA 94538, USA        |            |                     |                  |

## 6. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 6.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

### 6.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement).

### 6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                                            | U <sub>Lab</sub>           |
|------------------------------------------------------|----------------------------|
| Radio Frequency (Spectrum Analyzer)                  | 141.16 Hz                  |
| Occupied Bandwidth                                   | 1.22%                      |
| Power Spectral Density                               | 2.47 dB                    |
| RF Power Measurement Direct Method Using Power Meter | 1.3 dB (PK) / 0.45 dB (AV) |
| Unwanted Emissions, Conducted                        | 1.94 dB                    |
| Worst Case Conducted Disturbance, 9kHz to 0.15 MHz   | 3.78 dB                    |
| Worst Case Conducted Disturbance, 0.15 to 30 MHz     | 3.40 dB                    |
| Worst Case Radiated Disturbance, 9kHz to 30 MHz      | 2.87 dB                    |
| Worst Case Radiated Disturbance, 30 to 1000 MHz      | 6.01 dB                    |
| Worst Case Radiated Disturbance, 1000 to 18000 MHz   | 4.73 dB                    |
| Worst Case Radiated Disturbance, 18000 to 26000 MHz  | 4.51 dB                    |
| Worst Case Radiated Disturbance, 26000 to 40000 MHz  | 5.29 dB                    |
| Time Domain Measurements                             | 0.02 %                     |
| Temperature                                          | 0.57°C                     |
| Humidity                                             | 3.39%                      |
| DC Supply Voltages                                   | 0.57%                      |

Uncertainty figures are valid to a confidence level of 95%.

## 7. DYNAMIC FREQUENCY SELECTION

### 7.1. OVERVIEW

#### 7.1.1. LIMITS

#### **INNOVATION, SCIENCE and ECONOMIC DEVELOPMENT CANADA (ISED)**

ISED RSS-247 is closely harmonized with FCC Part 15 DFS rules. The deviations are as follows:

RSS-247 Issue 4

**Note:** For the band 5600–5650 MHz, only the ETSI EN 301 893 test procedure shall be used to demonstrate compliance. Devices using the FCC KDB Procedure 905462 must operate exclusively within the 5250-5350 MHz, 5470-5600 MHz, 5650-5725 MHz bands, or any combination of these bands.

#### **FCC**

§15.407 (h), FCC KDB 905462 D02 “COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION” and KDB 905462 D03 “U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY”.

**Table 1: Applicability of DFS requirements prior to use of a channel**

| Requirement                     | Operational Mode |                                  |                               |
|---------------------------------|------------------|----------------------------------|-------------------------------|
|                                 | Master           | Client (without radar detection) | Client (with radar detection) |
| Non-Occupancy Period            | Yes              | Not required                     | Yes                           |
| DFS Detection Threshold         | Yes              | Not required                     | Yes                           |
| Channel Availability Check Time | Yes              | Not required                     | Not required                  |
| U-NII Detection Bandwidth       | Yes              | Not required                     | Yes                           |

**Table 2: Applicability of DFS requirements during normal operation**

| Requirement                       | Operational Mode |                      |                   |
|-----------------------------------|------------------|----------------------|-------------------|
|                                   | Master           | Client (without DFS) | Client (with DFS) |
| DFS Detection Threshold           | Yes              | Not required         | Yes               |
| Channel Closing Transmission Time | Yes              | Yes                  | Yes               |
| Channel Move Time                 | Yes              | Yes                  | Yes               |
| U-NII Detection Bandwidth         | Yes              | Not required         | Yes               |

| Additional requirements for devices with multiple bandwidth modes                                                                                                                                                                                                                                                                                                                | Master Device or Client with Radar DFS | Client (without DFS)                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|------------------------------------------------------|
| <i>U-NII Detection Bandwidth and Statistical Performance Check</i>                                                                                                                                                                                                                                                                                                               | All BW modes must be tested            | Not required                                         |
| <i>Channel Move Time and Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                                                   | Test using widest BW mode available    | Test using the widest BW mode available for the link |
| <i>All other tests</i>                                                                                                                                                                                                                                                                                                                                                           | Any single BW mode                     | Not required                                         |
| <b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequency between the bonded 20 MHz channel blocks. |                                        |                                                      |

**Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring**

| Maximum Transmit Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Value<br>(see notes) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| E.I.R.P. $\geq$ 200 mill watt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -64 dBm              |
| E.I.R.P. < 200 mill watt and<br>power spectral density < 10 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -62 dBm              |
| E.I.R.P. < 200 mill watt that do not meet power spectral<br>density requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -64 dBm              |
| <p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note 3:</b> E.I.R.P. is based on the highest antenna gain. For MIMO devices refer to KDB publication 662911 D01.</p> |                      |

**Table 4: DFS Response requirement values**

| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Value                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <i>Non-occupancy period</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 30 minutes                                                                                                  |
| <i>Channel Availability Check Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 60 seconds                                                                                                  |
| <i>Channel Move Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10 seconds (See Note 1)                                                                                     |
| <i>Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 200 milliseconds +<br>approx. 60 milliseconds<br>over remaining 10<br>second period.<br>(See Notes 1 and 2) |
| <i>U-NII Detection Bandwidth</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Minimum 100% of the U-<br>NII 99% transmission<br>power bandwidth.<br>(See Note 3)                          |
| <p><b>Note 1:</b> <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 2:</b> The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p><b>Note 3:</b> During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> |                                                                                                             |

**Table 5 – Short Pulse Radar Test Waveforms**

| Radar Type                                                                                                                                                        | Pulse Width (usec) | PRI (usec)                                                                                                                                                    | Pulses                                                                       | Minimum Percentage of Successful Detection | Minimum Trials |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|--------------------------------------------|----------------|
| 0                                                                                                                                                                 | 1                  | 1428                                                                                                                                                          | 18                                                                           | See Note 1                                 | See Note 1     |
| 1                                                                                                                                                                 | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in table 5a                                                                     | Roundup:<br>$\{(1/360) \times (19 \times 10^6 / \text{PRI}_{\text{usec}})\}$ | 60%                                        | 30             |
|                                                                                                                                                                   |                    | Test B: 15 unique PRI values randomly selected within the range of 518-3066 usec. With a minimum increment of 1 usec, excluding PRI values selected in Test A |                                                                              |                                            |                |
| 2                                                                                                                                                                 | 1-5                | 150-230                                                                                                                                                       | 23-29                                                                        | 60%                                        | 30             |
| 3                                                                                                                                                                 | 6-10               | 200-500                                                                                                                                                       | 16-18                                                                        | 60%                                        | 30             |
| 4                                                                                                                                                                 | 11-20              | 200-500                                                                                                                                                       | 12-16                                                                        | 60%                                        | 30             |
| Aggregate (Radar Types 1-4)                                                                                                                                       |                    |                                                                                                                                                               |                                                                              | 80%                                        | 120            |
| <b>Note 1:</b> Short Pulse Radar Type 0 should be used for the <i>Detection Bandwidth</i> test, <i>Channel Move Time</i> , and <i>Channel Closing Time</i> tests. |                    |                                                                                                                                                               |                                                                              |                                            |                |

**Table 6 – Long Pulse Radar Test Signal**


| Radar Waveform Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Trials |
|---------------------|--------------------|-------------------|------------|------------------|------------------|--------------------------------------------|----------------|
| 5                   | 50-100             | 5-20              | 1000-2000  | 1-3              | 8-20             | 80%                                        | 30             |

**Table 7 – Frequency Hopping Radar Test Signal**

| Radar Waveform Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Trials |
|---------------------|--------------------|------------|----------------|--------------------|--------------------------------|--------------------------------------------|----------------|
| 6                   | 1                  | 333        | 9              | 0.333              | 300                            | 70%                                        | 30             |

## 7.1.2. TEST AND MEASUREMENT SYSTEM

### RADIATED METHOD SYSTEM BLOCK DIAGRAM

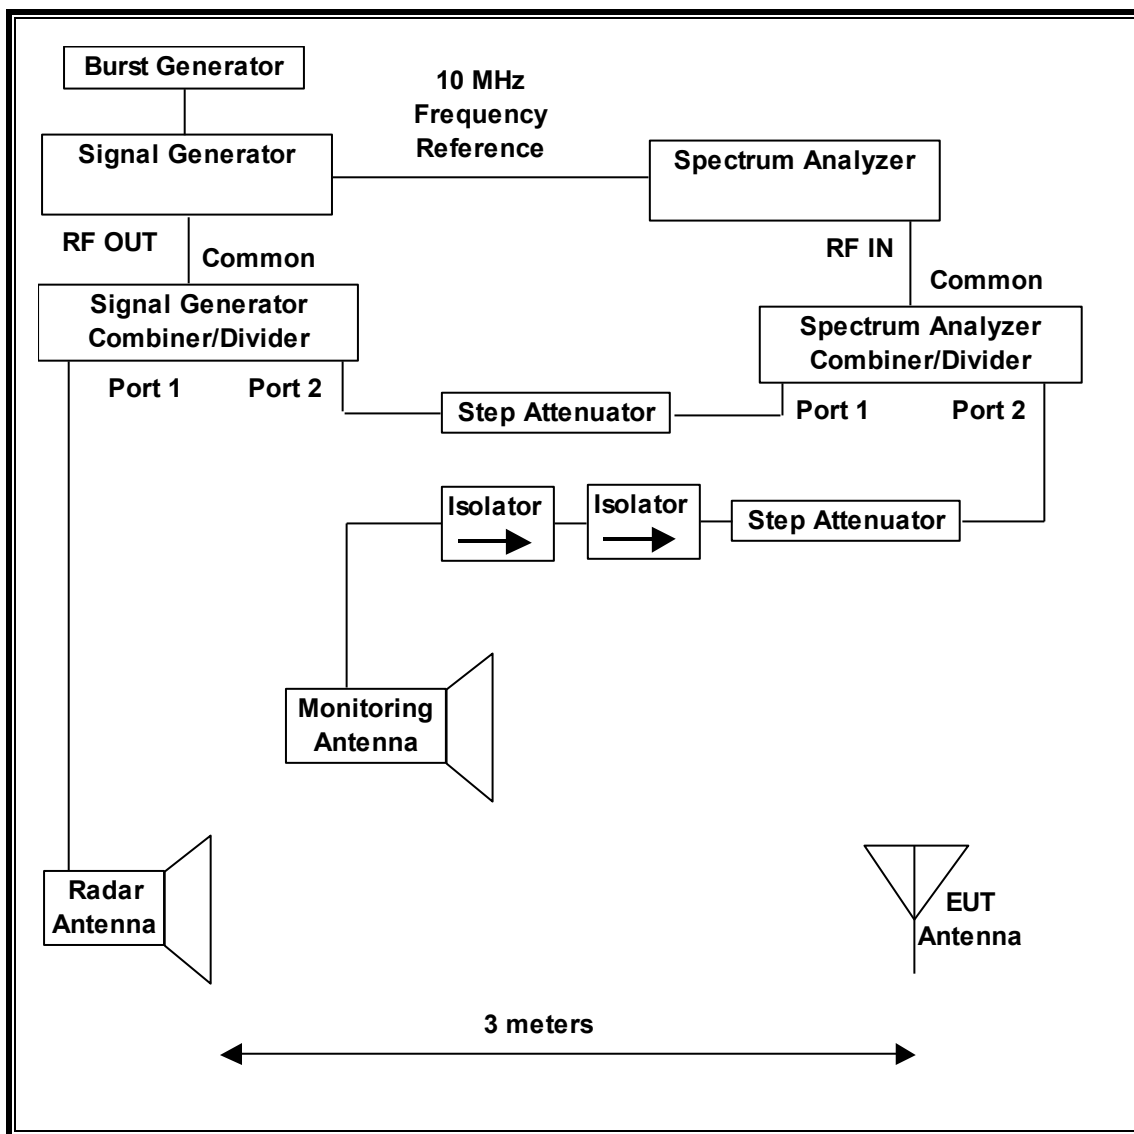

## **SYSTEM OVERVIEW**

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 1, 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of KDB 905462 D02. The frequency of the signal generator is incremented in 1 MHz steps from  $F_L$  to  $F_H$  for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

## **SYSTEM CALIBRATION**

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

## **ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL**

A link is established between the Master and Client and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Client devices. Fping is used to generate WLAN traffic. Traffic that meets or exceeds the minimum loading requirement is streamed from the Master device to the Client Device. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

## **TEST AND MEASUREMENT EQUIPMENT**

The following test and measurement equipment were utilized for the tests documented in this report:

| <b>TEST EQUIPMENT LIST</b>               |                     |              |               |                 |                |
|------------------------------------------|---------------------|--------------|---------------|-----------------|----------------|
| <b>Description</b>                       | <b>Manufacturer</b> | <b>Model</b> | <b>ID Num</b> | <b>Cal Date</b> | <b>Cal Due</b> |
| Spectrum Analyzer, PXA, 3Hz to 8.4GHz    | Keysight            | N9030A       | 150667        | 2025-01-21      | 2026-01-31     |
| Signal Generator, MXG X-Series RF Vector | Keysight            | N5182B       | 215999        | 2025-01-22      | 2026-01-31     |
| Frequency Extender                       | Keysight            | N5182BX      | 213906        | 2025-01-22      | 2026-01-31     |
| Arbitrary Waveform Generator             | Agilent / HP        | 33220A       | 80815         | 2025-01-21      | 2026-01-31     |

**Note:** An MXG series Signal Generator and separate external Frequency Extender module are shown in the preceding test system block diagram as a stand-alone Signal Generator.

### **7.1.3. TEST AND MEASUREMENT SOFTWARE**

The following test and measurement software were utilized for the tests documented in this report:

| <b>TEST SOFTWARE LIST</b> |                |                                            |
|---------------------------|----------------|--------------------------------------------|
| <b>Name</b>               | <b>Version</b> | <b>Test / Function</b>                     |
| Aggregate Time-PXA        | 3.1            | Channel Loading and Aggregate Closing Time |
| PXA Read                  | 3.1            | Signal Generator Screen Capture            |
| SGXProject.exe            | 1.7            | Radar Waveform Generation and Download     |

### **7.1.4. TEST ROOM ENVIRONMENT**


The test room temperature and humidity shall be maintained within normal temperature of 15~35 °C and normal humidity 20~75% (relative humidity).

## **ENVIRONMENT CONDITION**

| <b>Parameter</b> | <b>Value</b> |
|------------------|--------------|
| Temperature      | 22 °C        |
| Humidity         | 46 %         |

### 7.1.5. SETUP OF EUT

#### RADIATED METHOD EUT TEST SETUP

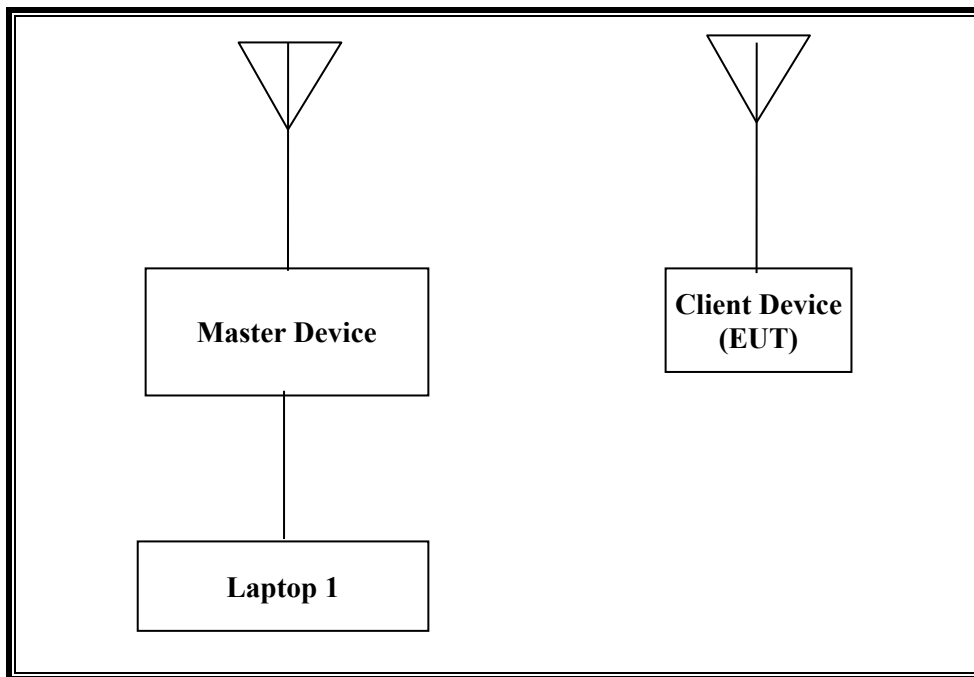

#### SUPPORT EQUIPMENT

The following support equipment was utilized for the tests documented in this report:

| PERIPHERAL SUPPORT EQUIPMENT LIST        |              |                   |                        |           |
|------------------------------------------|--------------|-------------------|------------------------|-----------|
| Description                              | Manufacturer | Model             | Serial Number          | FCC ID    |
| 802.11ac Dual Band Wireless Access Point | Cisco        | AIR-CAP3702E-A-K9 | FTX181570A6            | LDK102087 |
| P.O.E. Injector                          | Phihong      | POE30U-560(G)     | PHI170102N2            | DoC       |
| Laptop 1                                 | Lenovo       | Type 4236-B92     | PB-HEXC4 12/05         | DoC       |
| AC Adapter (Laptop 1)                    | Lenovo       | 42T4418           | 11S42T4418Z1ZGWG08R90M | DoC       |
| AC Adapter (EUT)                         | Samsung      | ETA0U61JWE        | SC2F422AS/A-E          | DoC       |

### **7.1.6. DESCRIPTION OF EUT**

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Client Device without Radar Detection.

Client EUT EIRP, maximum conducted output power, antenna assembly gain and TPC information can be found in the RF report referenced in section 4 of this report.

The rated output power of the Master unit is  $> 23\text{dBm}$  (EIRP). Therefore, the required interference threshold level is  $-64\text{ dBm}$ . After correction for procedural adjustments, the required radiated threshold at the antenna port is  $-64 + 1 = -63\text{ dBm}$ .

The calibrated radiated DFS Detection Threshold level is set to  $-64\text{ dBm}$ . The tested level is lower than the required level hence it provides a margin to the limit.

The EUT uses one transmitter/receiver chain connected to an antenna to perform radiated tests.

WLAN traffic that meets or exceeds the minimum required loading was generated by transferring a data stream from the Master Device to the Client Device using fping software package

The EUT utilizes the 802.11ac architecture. Three nominal channel bandwidths are implemented: 20 MHz, 40 MHz and 80 MHz.

Manufacturer declares that channel puncturing is not supported by the EUT.

Manufacturer declares that channel bandwidth reduction is not supported by the EUT.

TDLS (Tunneled Direct Link Setup) mode is not supported by the EUT.

The software installed in the EUT is 0.75.

The software installed in the access point is AP3G2-K9W7-M Version 15.3(3)JAB.

### **UNIFORM CHANNEL SPREADING**

This requirement is not applicable to Client Devices.

**OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS**

The Master Device is a Cisco Access Point, FCC ID: LDK102087. The minimum antenna gain for the Master Device is 6 dBi.

The rated output power of the Master unit is  $> 23\text{dBm}$  (EIRP). Therefore, the required interference threshold level is  $-64\text{ dBm}$ . After correction for procedural adjustments, the required radiated threshold at the antenna port is  $-64 + 1 = -63\text{ dBm}$ .


The calibrated radiated DFS Detection Threshold level is set to  $-64\text{ dBm}$ . The tested level is lower than the required level hence it provides a margin to the limit.

The software installed in the access point is AP3G2-K9W7-M Version 15.3(3)JAB.





## CHANNEL LOADING

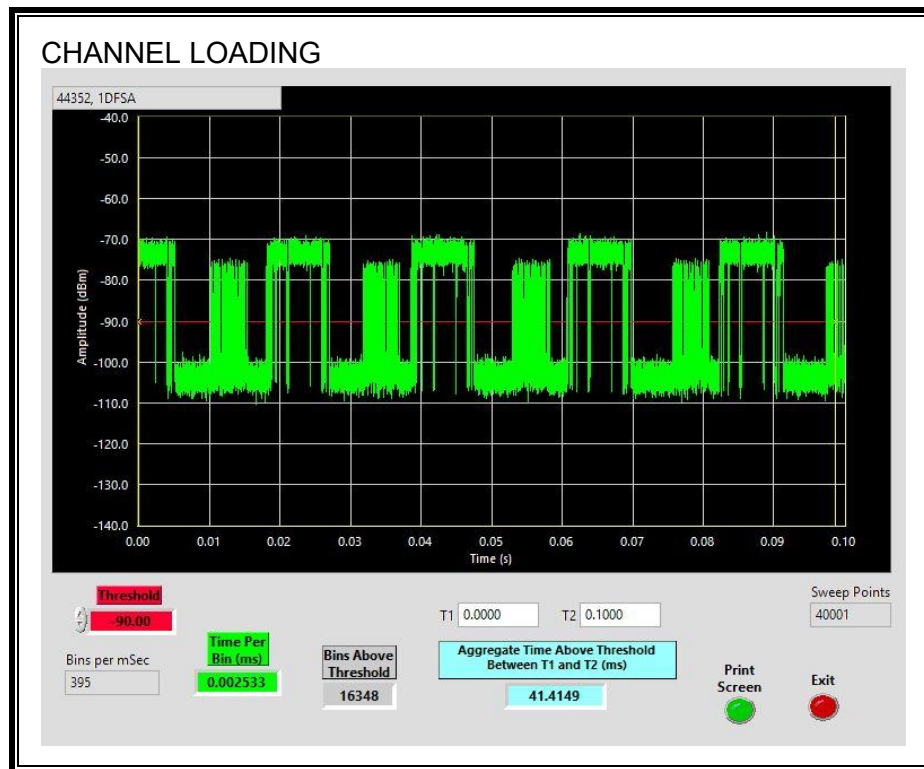

The level of traffic loading on the channel by the EUT is 41.4149%.

### 7.2.3. OVERLAPPING CHANNEL TESTS

#### RESULTS

These tests are not applicable.

### 7.2.4. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS

| Channel Move Time<br>(sec) | Limit<br>(sec) |
|----------------------------|----------------|
| 0.0924                     | 10             |


| Aggregate Channel Closing Transmission Time<br>(msec) | Limit<br>(msec) |
|-------------------------------------------------------|-----------------|
| 0                                                     | 60              |





### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

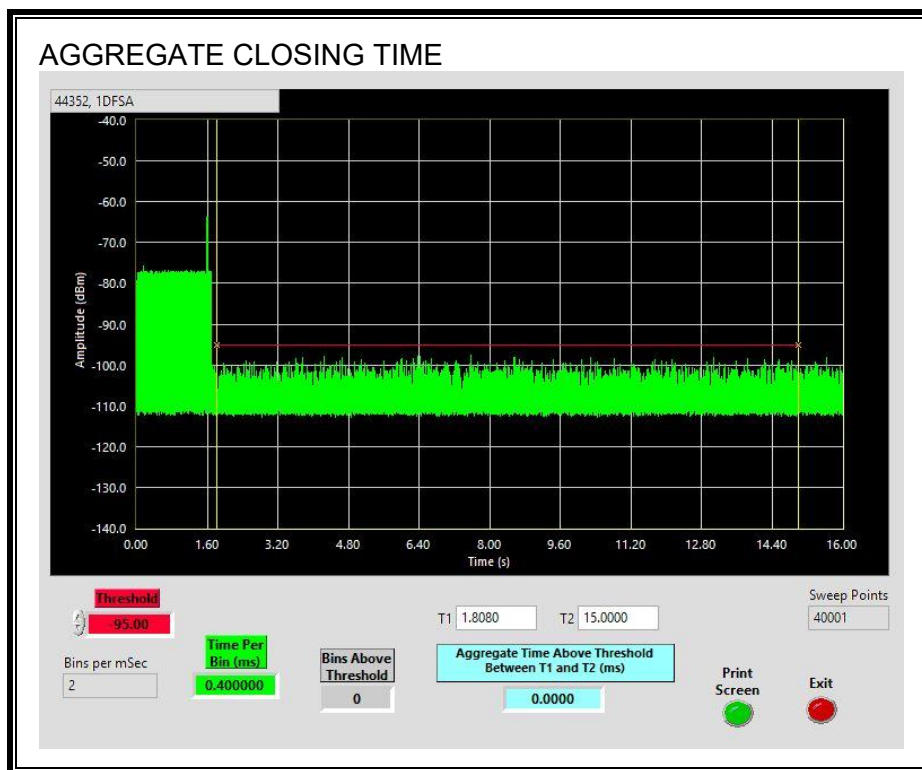

## 7.2.5. NON-OCCUPANCY PERIOD

### RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

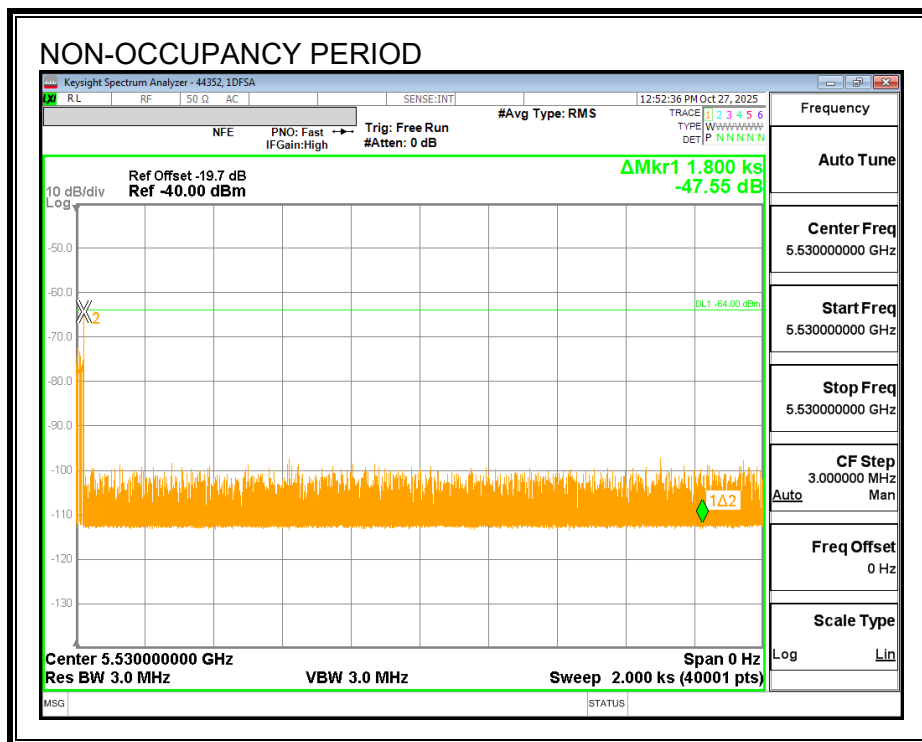

## 8. SETUP PHOTOS

Please refer to 16025792-EP1 for setup photos

## END OF TEST REPORT