

Logitech

Antenna Under Test (AUT)

Report

Model Name: YR0112

Equipment Type: Wireless Keyboard

Manufacturer: Logitech Technology (Suzhou) Co., Ltd

Test Location: Suzhou, China No.3 Song Shan Road, New District

Tested by: Tina Zhang

Report Date: 2025.09.26

Report Release History

Report version	Description	Date Issued
YR0112 AUT Report	Original release	2025/09/26

Table of Contents

1. EUT Antenna Information	3
2. Measured Values and Calculation of Antenna Gains	3
3. Conducted Power Measurement	4
3.1 Test Setup	4
3.2 Test Instruments	4
3.3 Test Procedure	4
3.4 Test Result of RF conducted Power	4
4. 2D Radiation Pattern Measurement	6
4.1 Test Location	6
4.2 Description of the anechoic chamber	6
4.3 Test Instruments	6
4.4 Test Procedure	7
4.5 Test Setup photos	8
4.6 2D Pattern Test Plot	11
X-Y Plane: Horizontal	11
X-Y Plane: Vertical	12
X-Z Plane: Horizontal	13
X-Z Plane: Vertical	14
Y-Z Plane: Horizontal	15
Y-Z Plane: Vertical	16

1. EUT Antenna Information

- 1) Antenna Material : PCB on board
- 2) Antenna Type : Printed monopole antenna
- 3) Antenna Dimension: 26 x 3 mm
- 4) Operating Frequency : 2.4 GHz - 2.4835 GHz
- 5) Input Impedance : 50 Ω
- 6) Standing-Wave Ratio : 2:1

2. Measured Values and Calculation of Antenna Gains

Measure peak horizontal/vertical EIRP on each x-y, y-z, x-z plane. The highest measured values will be used to calculate the antenna peak gain.


$$\text{Antenna Peak Gain (dBi)} = \text{Max EIRP(dBm)} - \text{Conducted Power (dBm)}$$

Frequency	X-Y Plane $\phi=0^{\circ}\sim 360^{\circ}, \theta=90^{\circ}$		X-Z Plane $\phi=0^{\circ}, \theta=0^{\circ}\sim 360^{\circ}$		Y-Z Plane $\phi=90^{\circ}, \theta=0^{\circ}\sim 360^{\circ}$		Max Peak EIRP (dBm)	Conducted Power (dBm)	Antenna Peak Gain (dBi)
	Ver. Peak EIRP (dBm)	Hori. Peak EIRP (dBm)	Ver. Peak EIRP (dBm)	Hori. Peak EIRP (dBm)	Ver. Peak EIRP (dBm)	Hori. Peak EIRP (dBm)			
2402	-8.72	7.14	1.52	-4.42	4.84	4.66	7.14	2.98	4.16
2440	-6.57	6.99	2.77	-4.51	5.20	5.61	6.99	2.91	4.08
2480	-6.00	5.56	0.29	-4.36	4.45	4.33	5.56	2.87	2.69

Test Date: 2025.09.26

3. Conducted Power Measurement

3.1 Test Setup

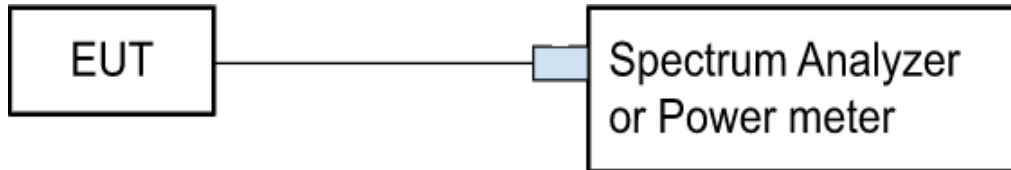

3.2 Test Instruments

Description	Model No.	Serial No.	Last Calibration
Spectrum Analyzer Keysight	N9020B	MY60110508	2024.10.10
RF signal cable Woken	Huber+suhner 10844497	276	2024.11.28

Note: The calibration interval of the above test instruments is 12 months

3.3 Test Procedure

A spectrum analyzer or Power meter was used to perform output power measurement, setting the detector to average and configuring EUT continuously transmitting power(100% duty cycle).

3.4 Test Result of RF conducted Power

Frequency	Conducted Power (dBm)
2402	2.98
2440	2.91

Frequency	Conducted Power (dBm)
2480	2.87

Test Date: 2025.09.26

4. 2D Radiation Pattern Measurement

4.1 Test Location

2D radiation pattern measurement in Logitech China SZ 2.4GHz FAC anechoic chamber.

4.2 Description of the anechoic chamber

Chamber specification

Length: 5.0m


Width: 2.8m

Height: 2.8m

Turntable height: 1.4m

Measurement antenna height: 1.4m

Block diagram to show the chamber and test equipment.

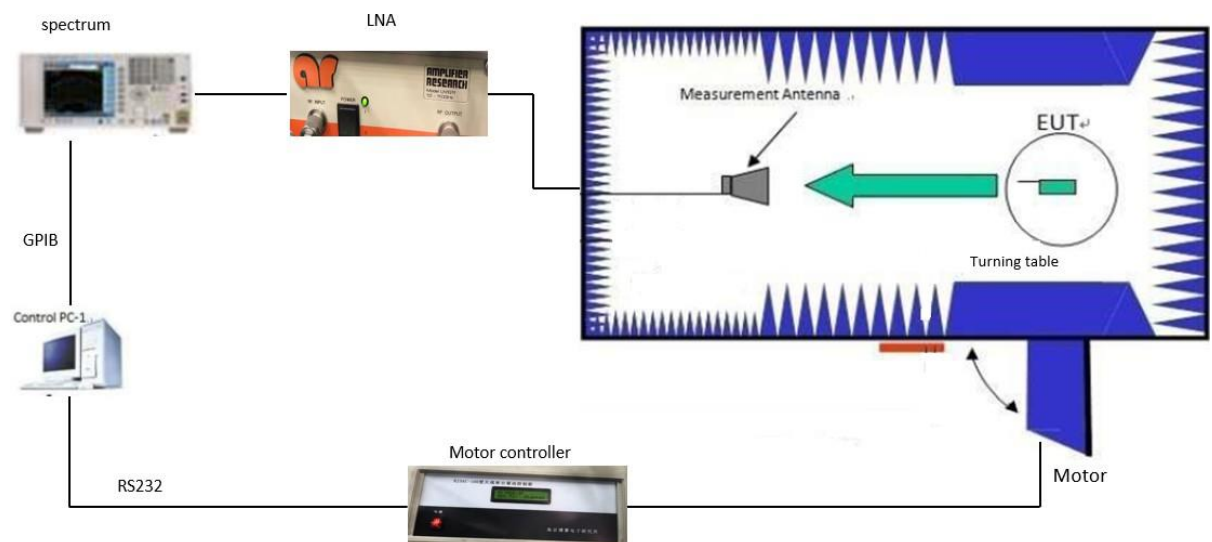

4.3 Test Instruments

Description	Model No.	Serial No.	Last Calibration
Spectrum Analyzer	N9010A	MY49061163	2025.7.15

Keysight			
Horn Antenna ETS	BBHA 9120 D(1201)	D69250	2024.11.28
RF signal cable1	EMC106HS-SM-N MR-1100	SN250810	2025.08.10
RF signal cable2	EMC106HS-SM-N MR-1500	SN241116	2024.11.16
RF signal cable3	EMC106HS-SM-N MR-2000	SN241116	2024.11.16
Software	FAC-Radio Measurement System	Version 1.1.0.7	N/A
Turntable controller	BJ3AC-100	N/A	2024.11.28
LNA	EMC118A45SE	981080	2025.03.26

Note: The calibration interval of the above test instruments is 12 months

4.4 Test Procedure

- i. Connect the EUT to Spectrum Analyzer and record the power setting of EUT and the measured conducted power.
- ii. Fasten the EUT in the center of the turntable, record the coordinates and take pictures.
- iii. Configuring EUT continuously transmitting power(100% duty cycle).
- iv. Make sure the transmit signal is stable and at the maximum RF power level.
- v. Setup the channel power function by spectrum analyzer.
- vi. Read the channel power level on the spectrum analyzer and record in the following positions.
 1. The turntable is then stepped between 0 to 360 degrees along the horizontal plane in 15-degree increments.
 2. Data is recorded using the spectrum analyzer for both theta and phi polarizations at each position.
- vii. Rotate the EUT with 90 degrees and repeat step f.1 and step f.2 until all 3 planes(X-Y,X-Z,Y-Z) were measured.

- viii. According to substitution techniques, a substitution horn antenna is substituted for EUT at the same position and the signal generator exports the CW signal to the substitution antenna via a TX cable. Rotated the turntable and moved the receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a value of spectrum reading equal to "Raw Value" gotten from step vii. Record the power level of S.G.

$$EIRP = P_{SigGen} + G_T - L_C$$

where:

P_{SigGen} = power setting of the signal generator that produces the same received power reading as the DUT, in dBm;


G_T = gain of the substitute antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal loss in the cable connecting the signal generator to the substitute antenna, in dB

- ix. Antenna Peak Gain (dBi) = Max EIRP(dBm) - Conducted Power (dBm)

4.5 2D Pattern Test Plot

X-Y Plane: Horizontal

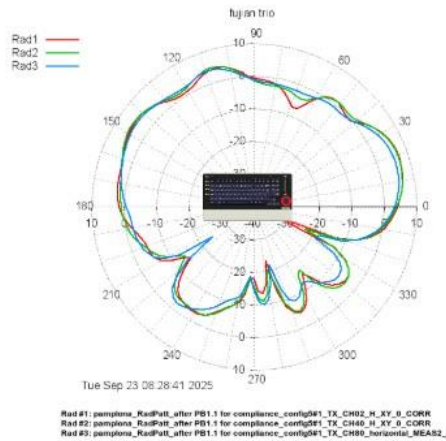

[imgfile: tmp/fujian trio_gnuplot20250923-4626-1yhgwvm-0.png]

Radiation pattern #1:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH02_H_XY_0_CORR

Average power = **-2.71 dBm**

Front average power = **2.01 dBm** (From 0 deg to 180 deg)

Min power = **-32.71 dBm @ -24.00 deg**

Max power = **7.14 dBm @ 18.00 deg**

Radiation pattern #2:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH40_H_XY_0_CORR

Average power = **-2.43 dBm**

Front average power = **2.26 dBm** (From 0 deg to 180 deg)

Min power = **-22.77 dBm @ -24.00 deg**

Max power = **6.99 dBm @ 18.00 deg**

Delta max power = **-0.16 dBm**

Delta average power = **0.28 dBm**

Delta front average power = **0.25 dBm**

Radiation pattern #3:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH80_horizontal_MEAS2_0_CORR

Average power = **-3.14 dBm**

Front average power = **1.82 dBm** (From 0 deg to 180 deg)

Min power = **-24.12 dBm @ -144.00 deg**


Max power = **5.56 dBm @ 15.00 deg**

Delta max power = **-1.59 dBm**

Delta average power = **-0.42 dBm**

Delta front average power = **-0.19 dBm**

X-Y Plane: Vertical

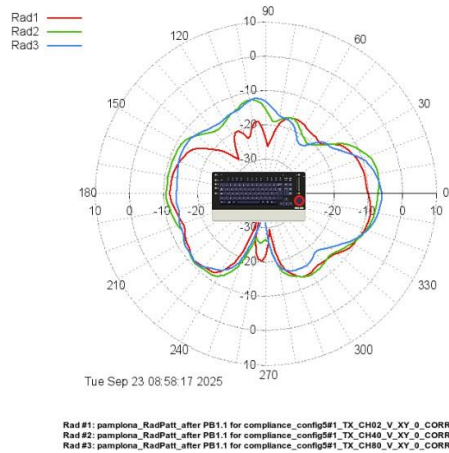

[imgfile: tmp/_gnuplot20250923-4626-1hwgsnu-0.png]

Radiation pattern #1:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH02_V_XY_0_CORR

Average power = **-15.95 dBm**

Front average power = **-17.38 dBm** (From 0 deg to 180 deg)

Min power = **-34.52 dBm** @ -105.00 deg

Max power = **-8.72 dBm** @ -15.00 deg

Radiation pattern #2:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH40_V_XY_0_CORR

Average power = **-13.85 dBm**

Front average power = **-14.06 dBm** (From 0 deg to 180 deg)

Min power = **-26.51 dBm** @ -102.00 deg

Max power = **-6.57 dBm** @ 9.00 deg

Delta max power = **2.15 dBm**

Delta average power = **2.09 dBm**

Delta front average power = **3.32 dBm**

Radiation pattern #3:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH80_V_XY_0_CORR

Average power = **-14.99 dBm**

Front average power = **-14.63 dBm** (From 0 deg to 180 deg)

Min power = **-36.23 dBm** @ -93.00 deg


Max power = **-6.00 dBm** @ -3.00 deg

Delta max power = **2.72 dBm**

Delta average power = **0.96 dBm**

Delta front average power = **2.75 dBm**

X-Z Plane: Horizontal

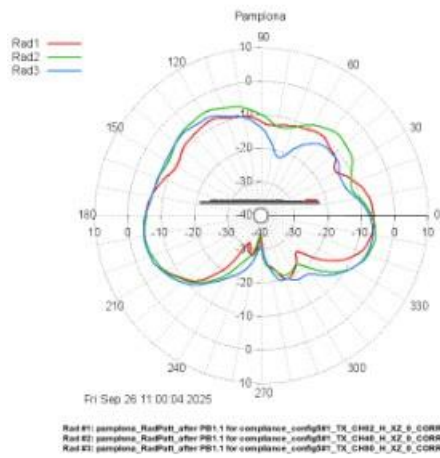

[imgfile: tmp/Pamplona_gnuplot20250926-4626-1dmwh6a-0.png]

Radiation pattern #1:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH02_H_XZ_0_CORR

Average power = **-13.27 dBm**

Front average power = **-9.95 dBm** (From 0 deg to 180 deg)

Min power = **-34.05 dBm** @ -90.00 deg

Max power = **-4.42 dBm** @ -171.00 deg

Radiation pattern #2:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH40_H_XZ_0_CORR

Average power = **-11.58 dBm**

Front average power = **-8.19 dBm** (From 0 deg to 180 deg)

Min power = **-33.46 dBm** @ -93.00 deg

Max power = **-4.51 dBm** @ -168.00 deg

Delta max power = **-0.09 dBm**

Delta average power = **1.69 dBm**

Delta front average power = **1.77 dBm**

Radiation pattern #3:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH80_H_XZ_0_CORR

Average power = **-12.44 dBm**

Front average power = **-11.15 dBm** (From 0 deg to 180 deg)

Min power = **-31.05 dBm** @ -90.00 deg


Max power = **-4.36 dBm** @ -168.00 deg

Delta max power = **0.06 dBm**

Delta average power = **0.83 dBm**

Delta front average power = **-1.20 dBm**

X-Z Plane: Vertical

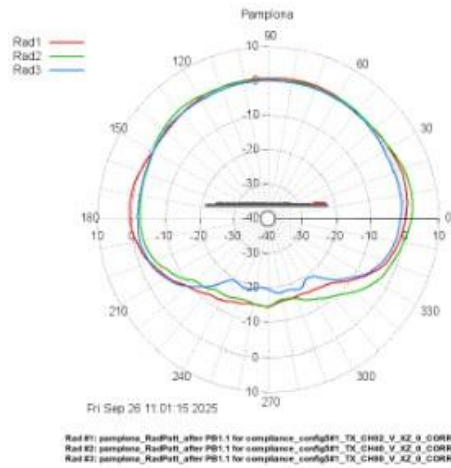

[imgfile: tmp/Pamplona_gnuplot20250926-4626-1xrfeha-0.png]

Radiation pattern #1:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH02_V_XZ_0_CORR

Average power = **-4.46 dBm**

Front average power = **0.39 dBm** (From 0 deg to 180 deg)

Min power = **-15.82 dBm** @ -66.00 deg

Max power = **1.52 dBm** @ 18.00 deg

Radiation pattern #2:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH40_V_XZ_0_CORR

Average power = **-4.41 dBm**

Front average power = **0.33 dBm** (From 0 deg to 180 deg)

Min power = **-16.10 dBm** @ -78.00 deg

Max power = **2.77 dBm** @ 9.00 deg

Delta max power = **1.24 dBm**

Delta average power = **0.05 dBm**

Delta front average power = **-0.06 dBm**

Radiation pattern #3:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH80_V_XZ_0_CORR

Average power = **-6.06 dBm**

Front average power = **-0.51 dBm** (From 0 deg to 180 deg)

Min power = **-19.76 dBm** @ -96.00 deg


Max power = **0.29 dBm** @ 66.00 deg

Delta max power = **-1.23 dBm**

Delta average power = **-1.60 dBm**

Delta front average power = **-0.91 dBm**

Y-Z Plane: Horizontal

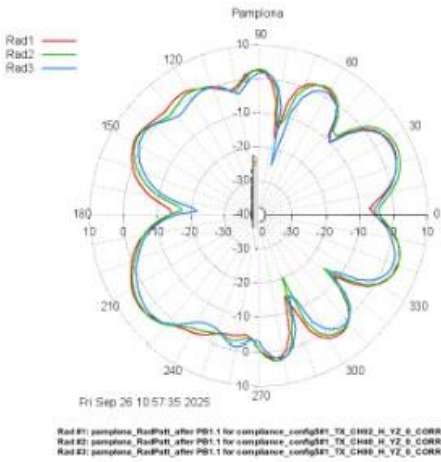

[imgfile: tmp/Pamplona_gnuplot20250926-4626-ljru15o-0.png]

Radiation pattern #1:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH02_H_YZ_0_CORR

Average power = **-1.18 dBm**

Front average power = **-0.91 dBm** (From 0 deg to 180 deg)

Min power = **-16.78 dBm** @ 78.00 deg

Max power = **4.66 dBm** @ 27.00 deg

Radiation pattern #2:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH40_H_YZ_0_CORR

Average power = **-1.32 dBm**

Front average power = **-1.01 dBm** (From 0 deg to 180 deg)

Min power = **-20.09 dBm** @ -69.00 deg

Max power = **5.61 dBm** @ 27.00 deg

Delta max power = **0.95 dBm**

Delta average power = **-0.13 dBm**

Delta front average power = **-0.10 dBm**

Radiation pattern #3:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH80_H_YZ_0_CORR

Average power = **-2.54 dBm**

Front average power = **-2.61 dBm** (From 0 deg to 180 deg)

Min power = **-24.97 dBm** @ 75.00 deg


Max power = **4.33 dBm** @ 27.00 deg

Delta max power = **-0.33 dBm**

Delta average power = **-1.36 dBm**

Delta front average power = **-1.70 dBm**

Y-Z Plane: Vertical

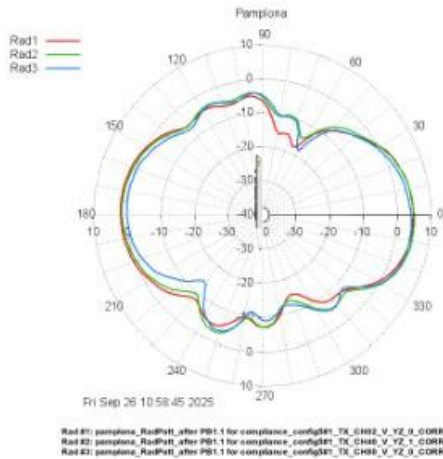

[imgfile: tmp/Pamplona_gnuplot20250926-4625-3z9qpg-0.png]

Radiation pattern #1:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH02_V_YZ_0_CORR

Average power = **-4.19 dBm**

Front average power = **-4.33 dBm** (From 0 deg to 180 deg)

Min power = **-17.92 dBm** @ 66.00 deg

Max power = **4.84 dBm** @ -3.00 deg

Radiation pattern #2:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH40_V_YZ_1_CORR

Average power = **-3.56 dBm**

Front average power = **-3.49 dBm** (From 0 deg to 180 deg)

Min power = **-14.66 dBm** @ 63.00 deg

Max power = **5.20 dBm** @ -6.00 deg

Delta max power = **0.36 dBm**

Delta average power = **0.64 dBm**

Delta front average power = **0.83 dBm**

Radiation pattern #3:

pamplona_RadPatt_after PB1.1 for compliance_config5#1_TX_CH80_V_YZ_0_CORR

Average power = **-4.65 dBm**

Front average power = **-4.46 dBm** (From 0 deg to 180 deg)

Min power = **-18.33 dBm** @ 60.00 deg

Max power = **4.45 dBm** @ -9.00 deg

Delta max power = **-0.40 dBm**

Delta average power = **-0.46 dBm**

Delta front average power = **-0.13 dBm**