



Appendix A. Test Result of AC Power Line Conducted Emission

USB Port 1

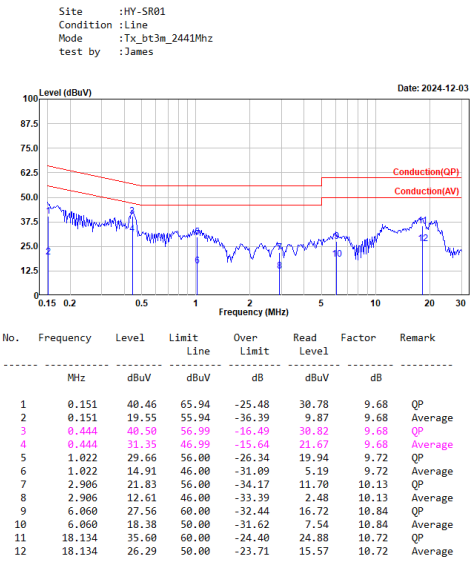


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

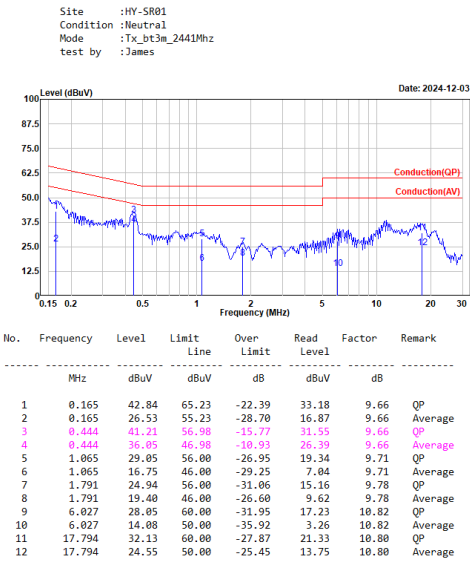


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

USB Port 2

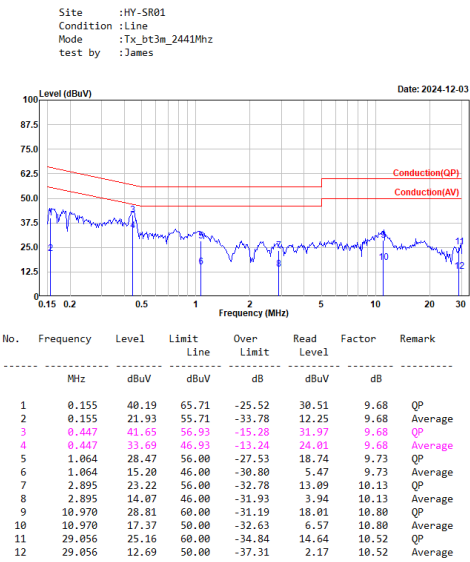


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

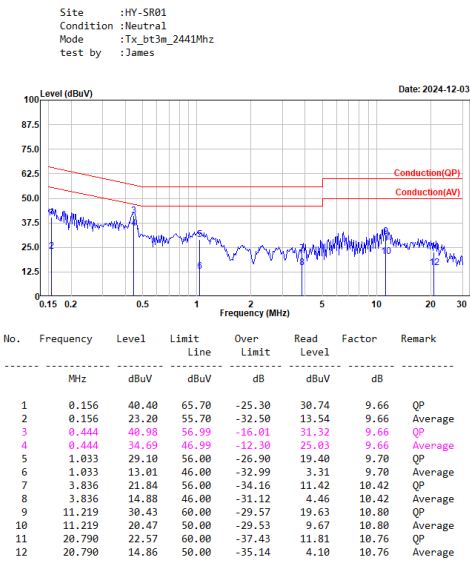

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of 20dB Bandwidth


Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
GFSK	2402	0.96	-
	2441	0.96	-
	2480	0.96	-
8DPSK	2402	1.30	-
	2441	1.30	-
	2480	1.30	-

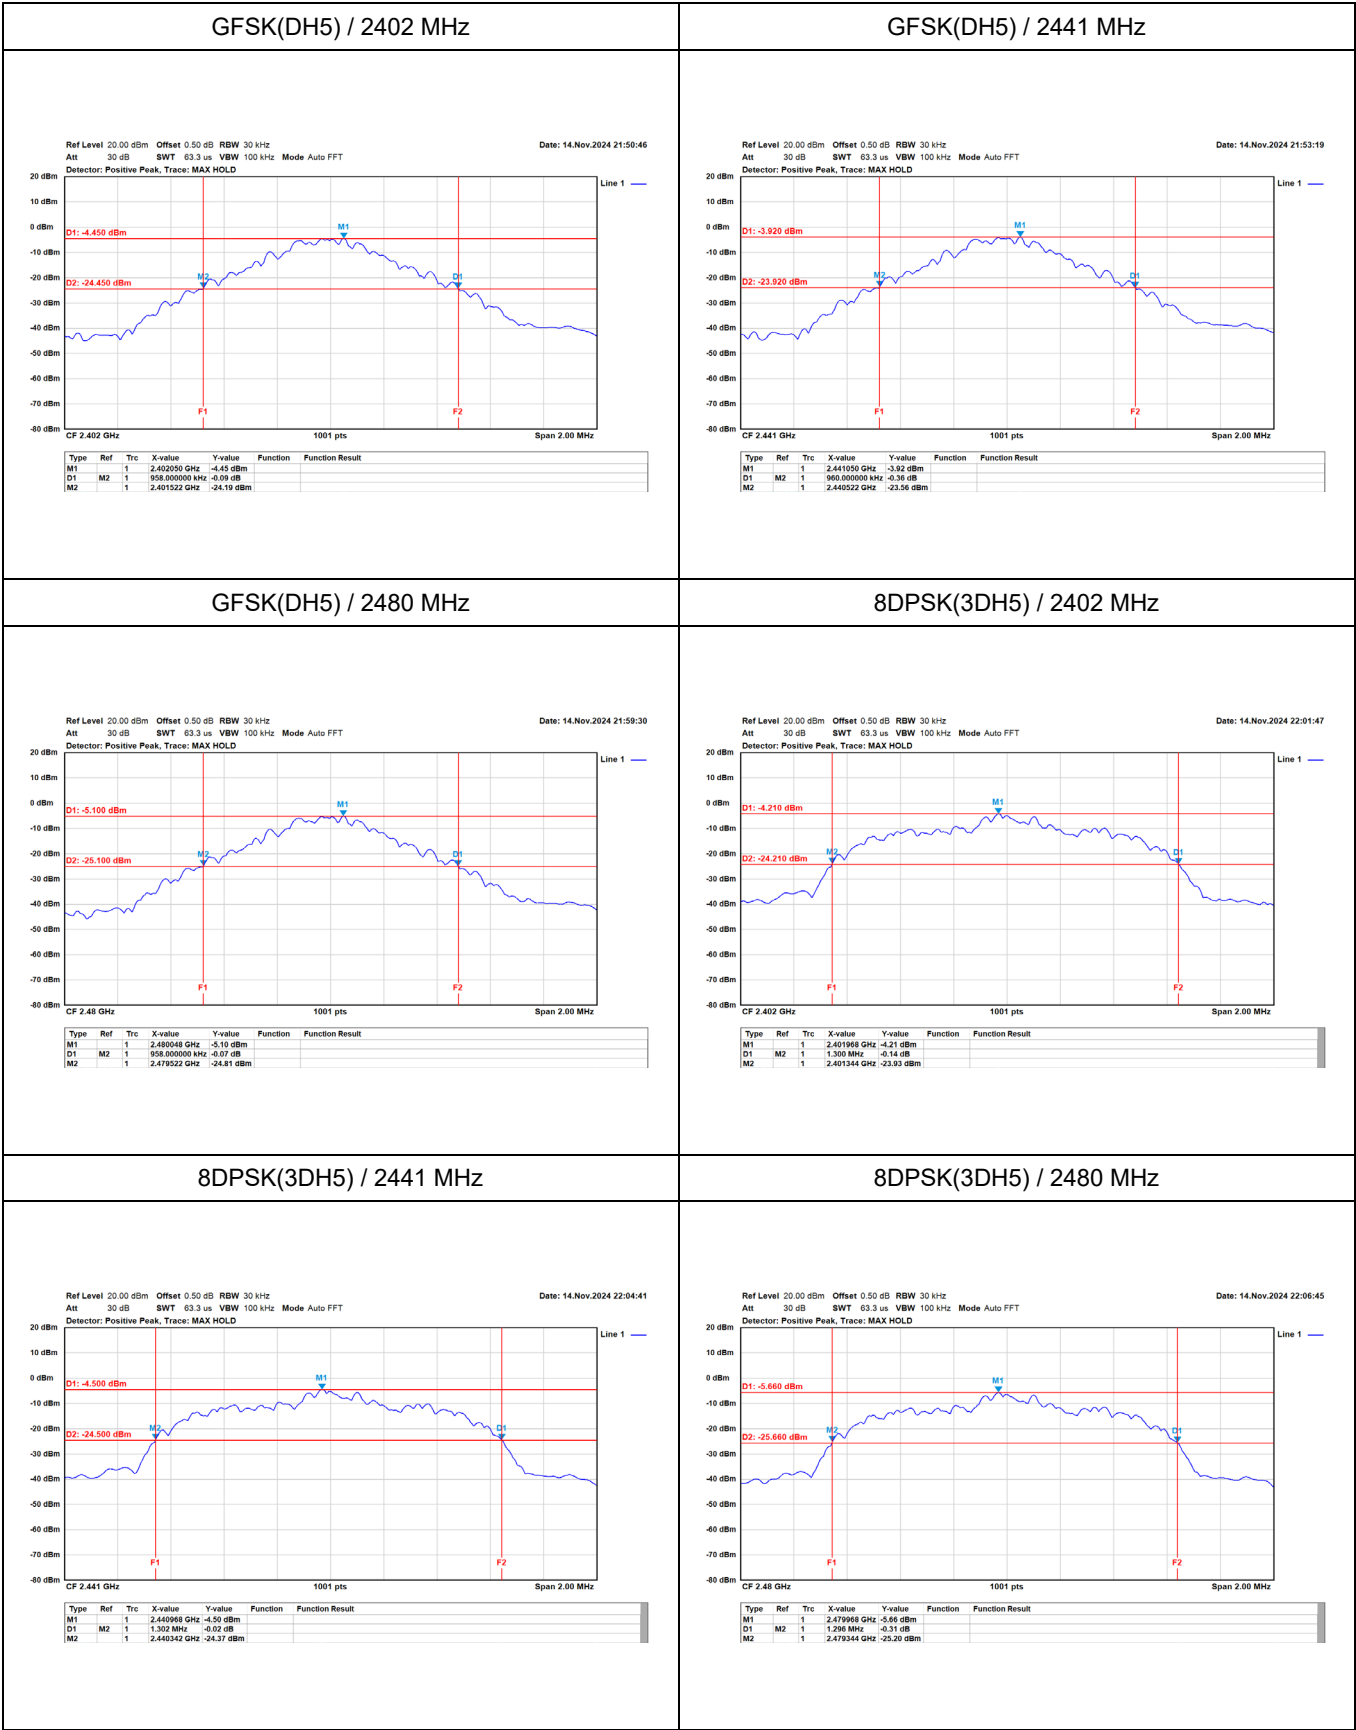


Appendix C. Test Result of Carrier Frequency Separation

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK	2402	1.00	0.639	Pass
	2441	0.99	0.640	Pass
	2480	0.99	0.639	Pass
8DPSK	2402	1.00	0.867	Pass
	2441	1.00	0.868	Pass
	2480	1.00	0.864	Pass


GFSK(DH5) / 2402 MHz

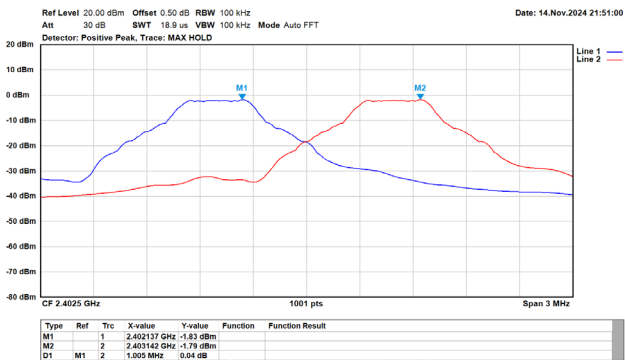


GFSK(DH5) / 2441 MHz

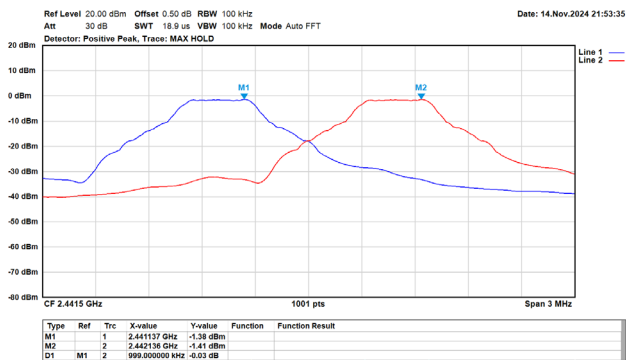


GFSK(DH5) / 2480 MHz

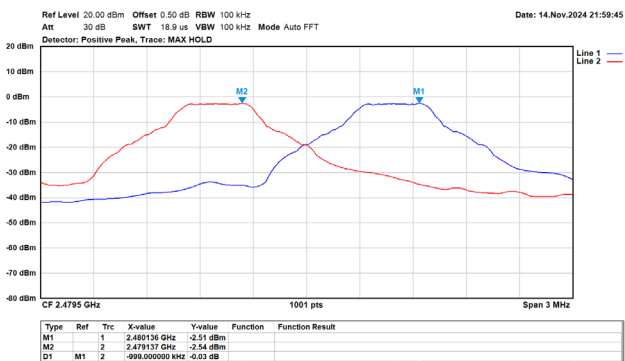


8DPSK(3DH5) / 2402 MHz

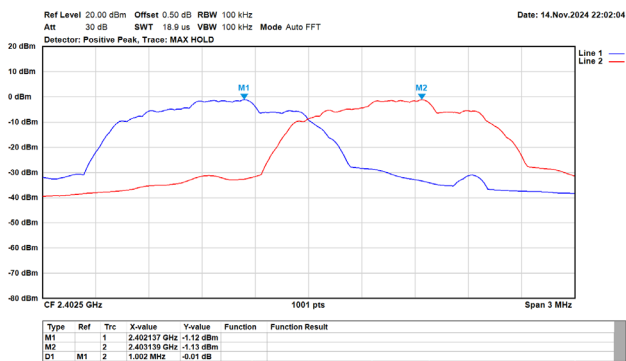

8DPSK(3DH5) / 2441 MHz

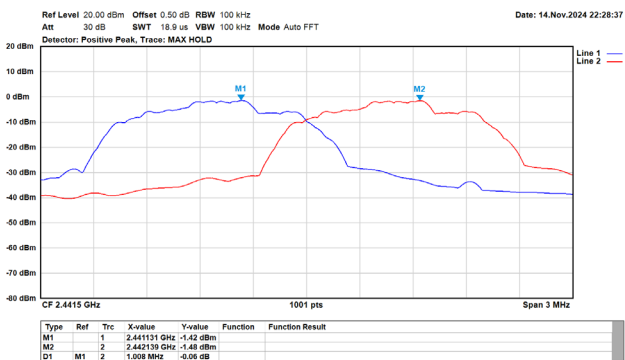

8DPSK(3DH5) / 2480 MHz

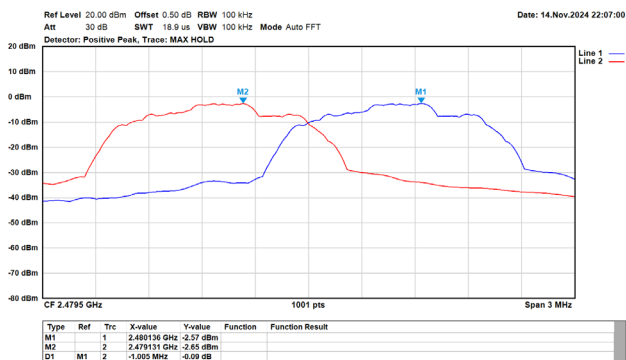


Appendix D. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	-0.63	21.00	Pass
	2441	-0.65	21.00	Pass
	2480	-1.65	21.00	Pass
8DPSK	2402	0.12	21.00	Pass
	2441	-0.33	21.00	Pass
	2480	-1.39	21.00	Pass


Appendix E. Test Result of Number of Hopping Frequency

Modulation	Frequency Range (MHz)	Measure Level (Channels)	Limit (Channels)	Result
GFSK	2402 ~ 2480	79	≥ 15	Pass
8DPSK	2402 ~ 2480	79	≥ 15	Pass

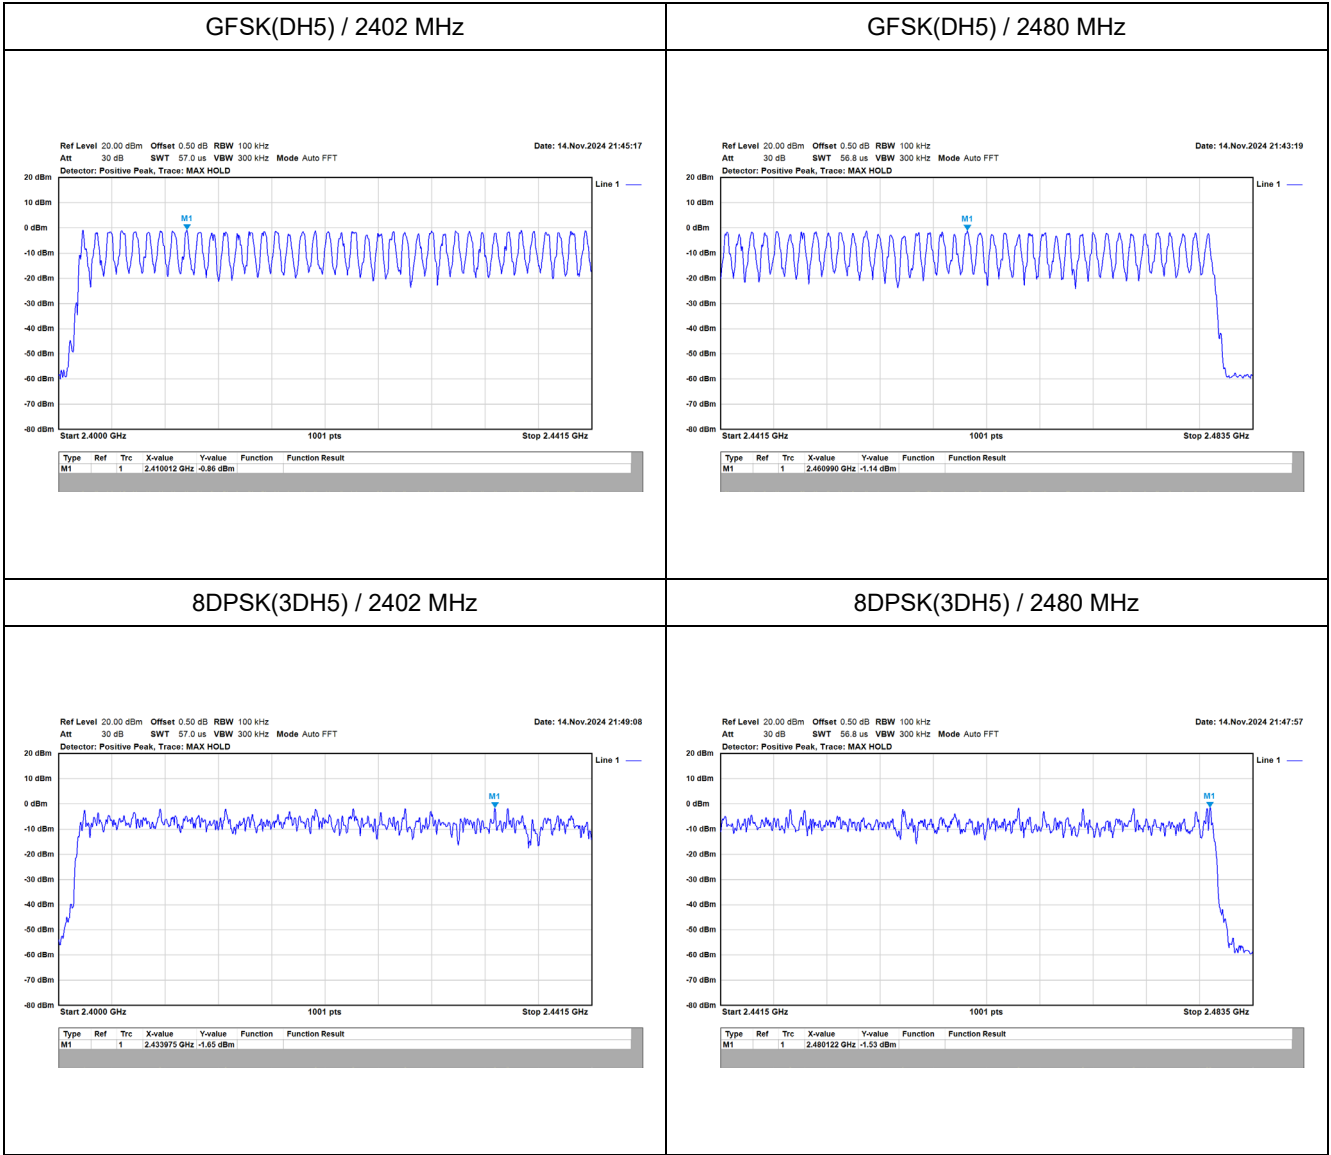


Appendix F. Test Result of Dwell Time

Modulation	Occupancy Time of Frequency Hopping System
GFSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.81 = 0.002810 sec
	Dwell Time : $0.002810 \times (266.67/79) \times 31.60 = 0.300$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.8 = 0.002800 sec
	Dwell Time : $0.002800 \times (266.67/79) \times 31.60 = 0.299$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.81 = 0.002810 sec
	Dwell Time : $0.002810 \times (266.67/79) \times 31.60 = 0.300$ sec °
8DPSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.8 = 0.002800 sec
	Dwell Time : $0.002800 \times (266.67/79) \times 31.60 = 0.299$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.8 = 0.002800 sec
	Dwell Time : $0.002800 \times (266.67/79) \times 31.60 = 0.299$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.81 = 0.002810 sec
	Dwell Time : $0.002810 \times (266.67/79) \times 31.60 = 0.300$ sec °
Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4 sec, And Corresponds to The Standard °	

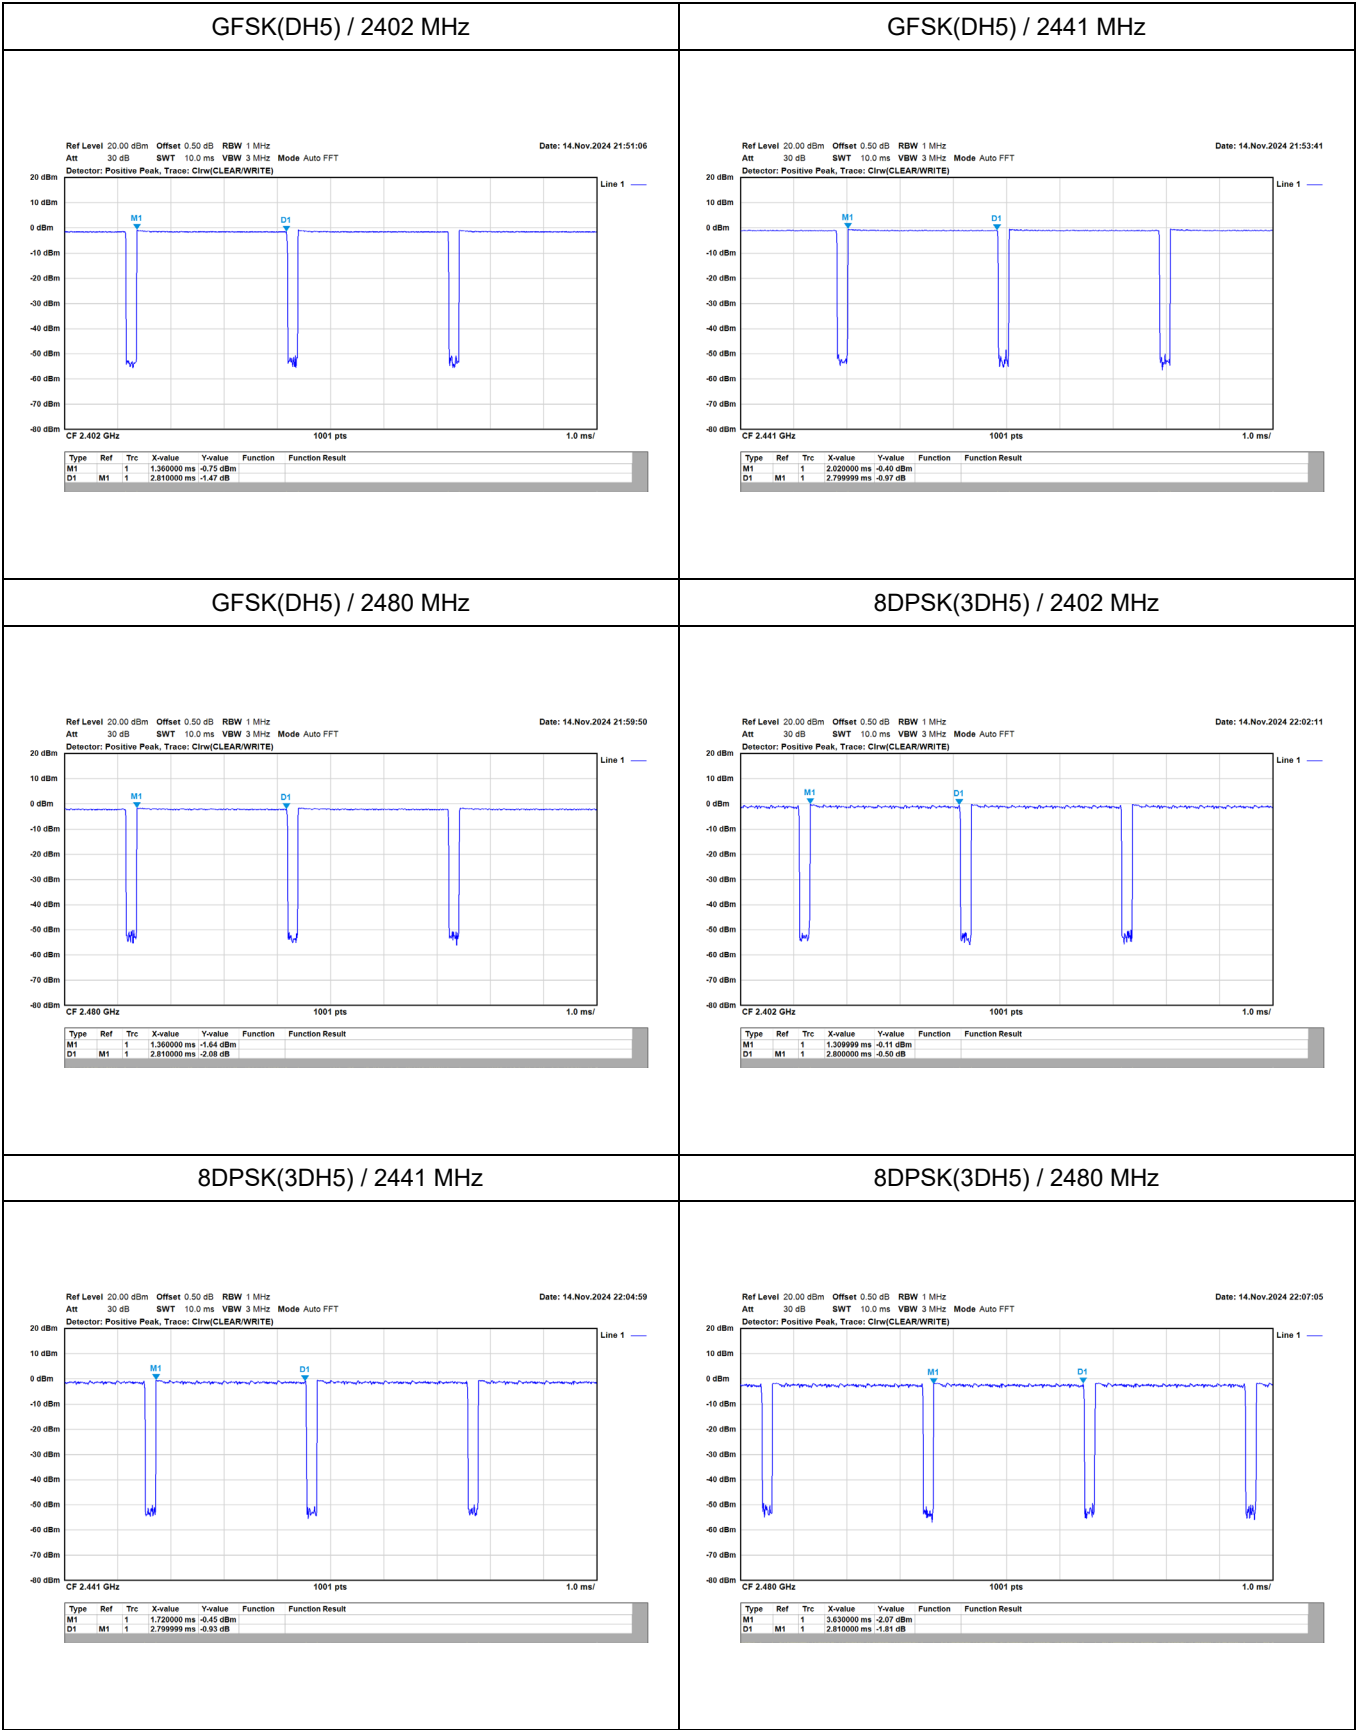


Appendix G. Test Result of Antenna Port Conducted Emission

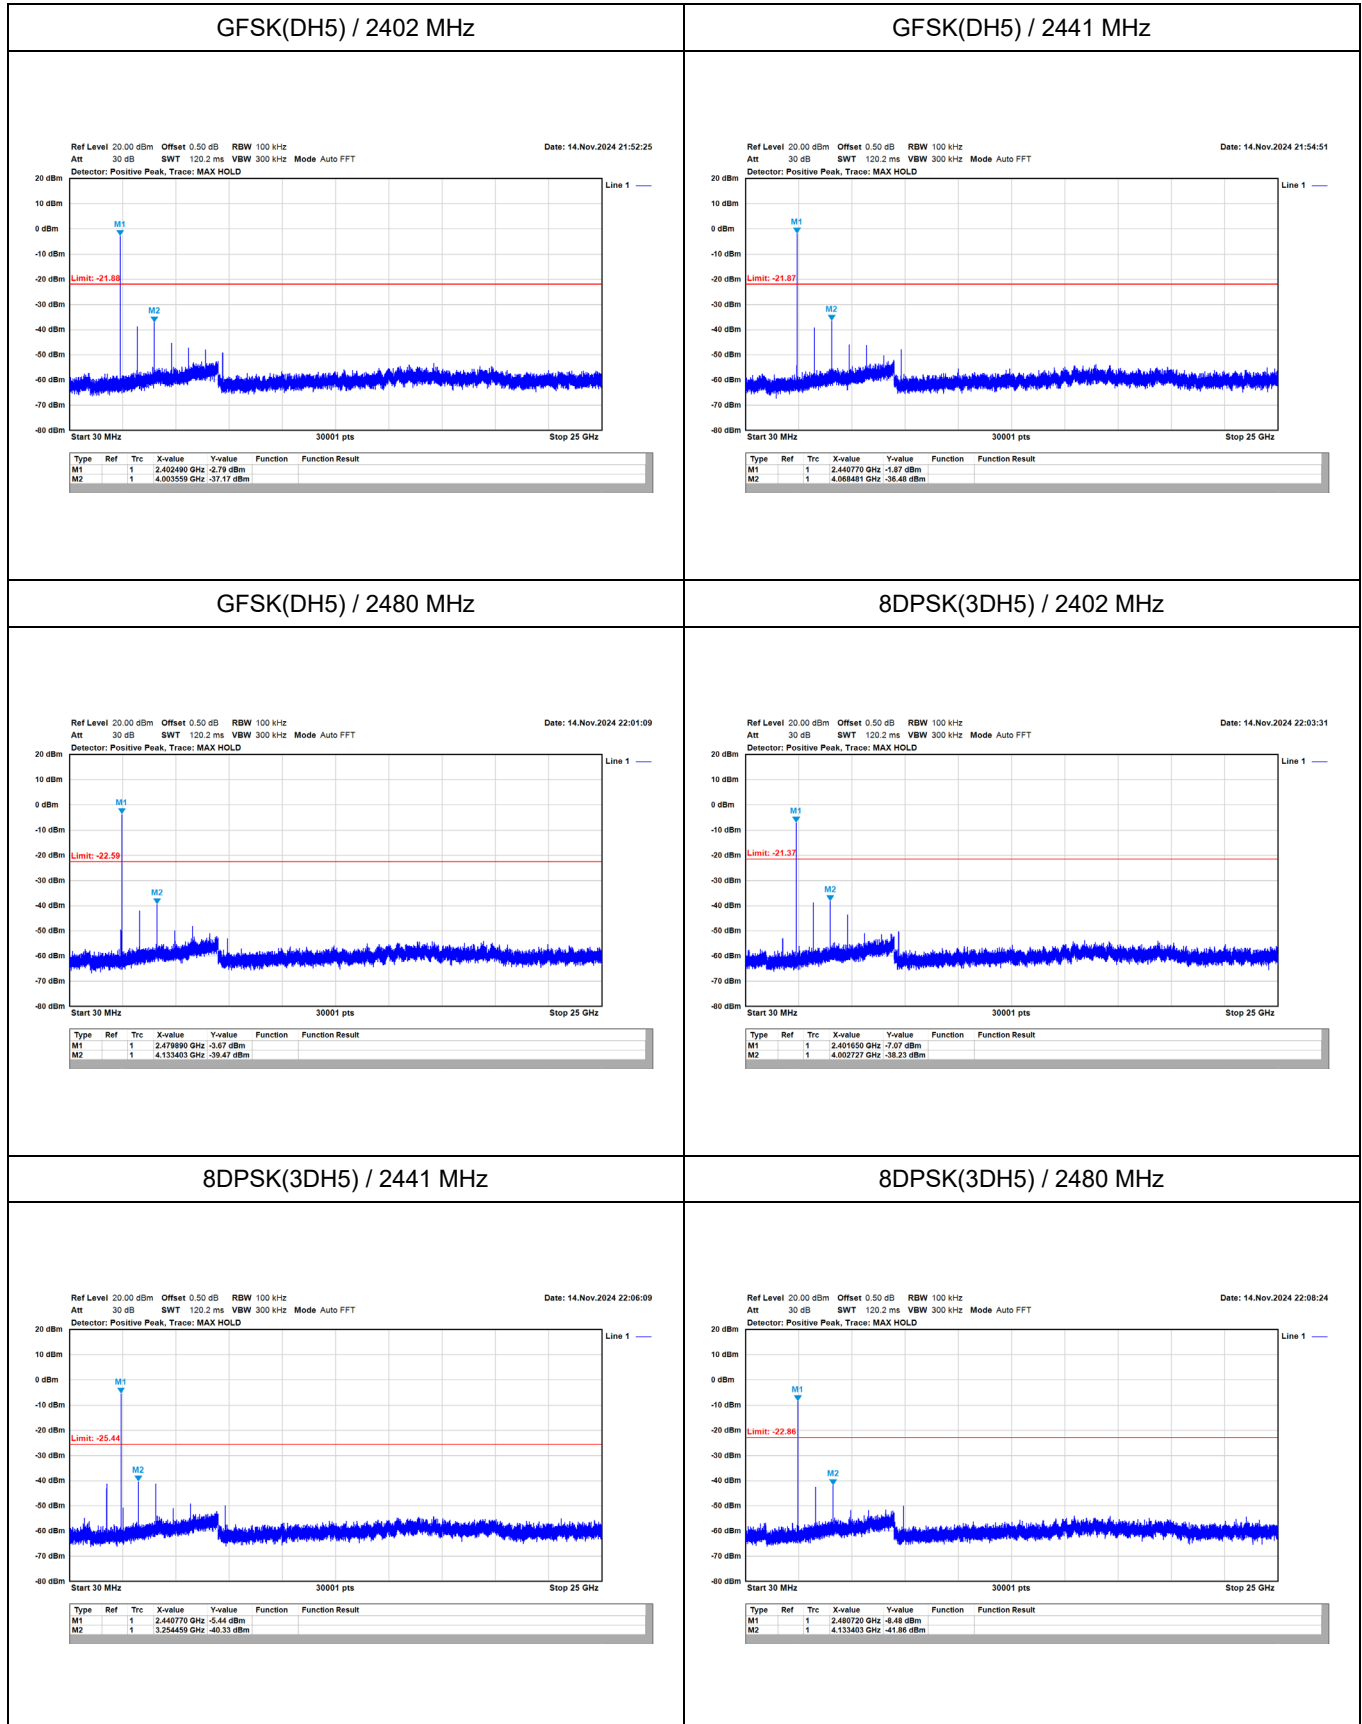

Hopping off


Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
8DPSK	> 20	Pass

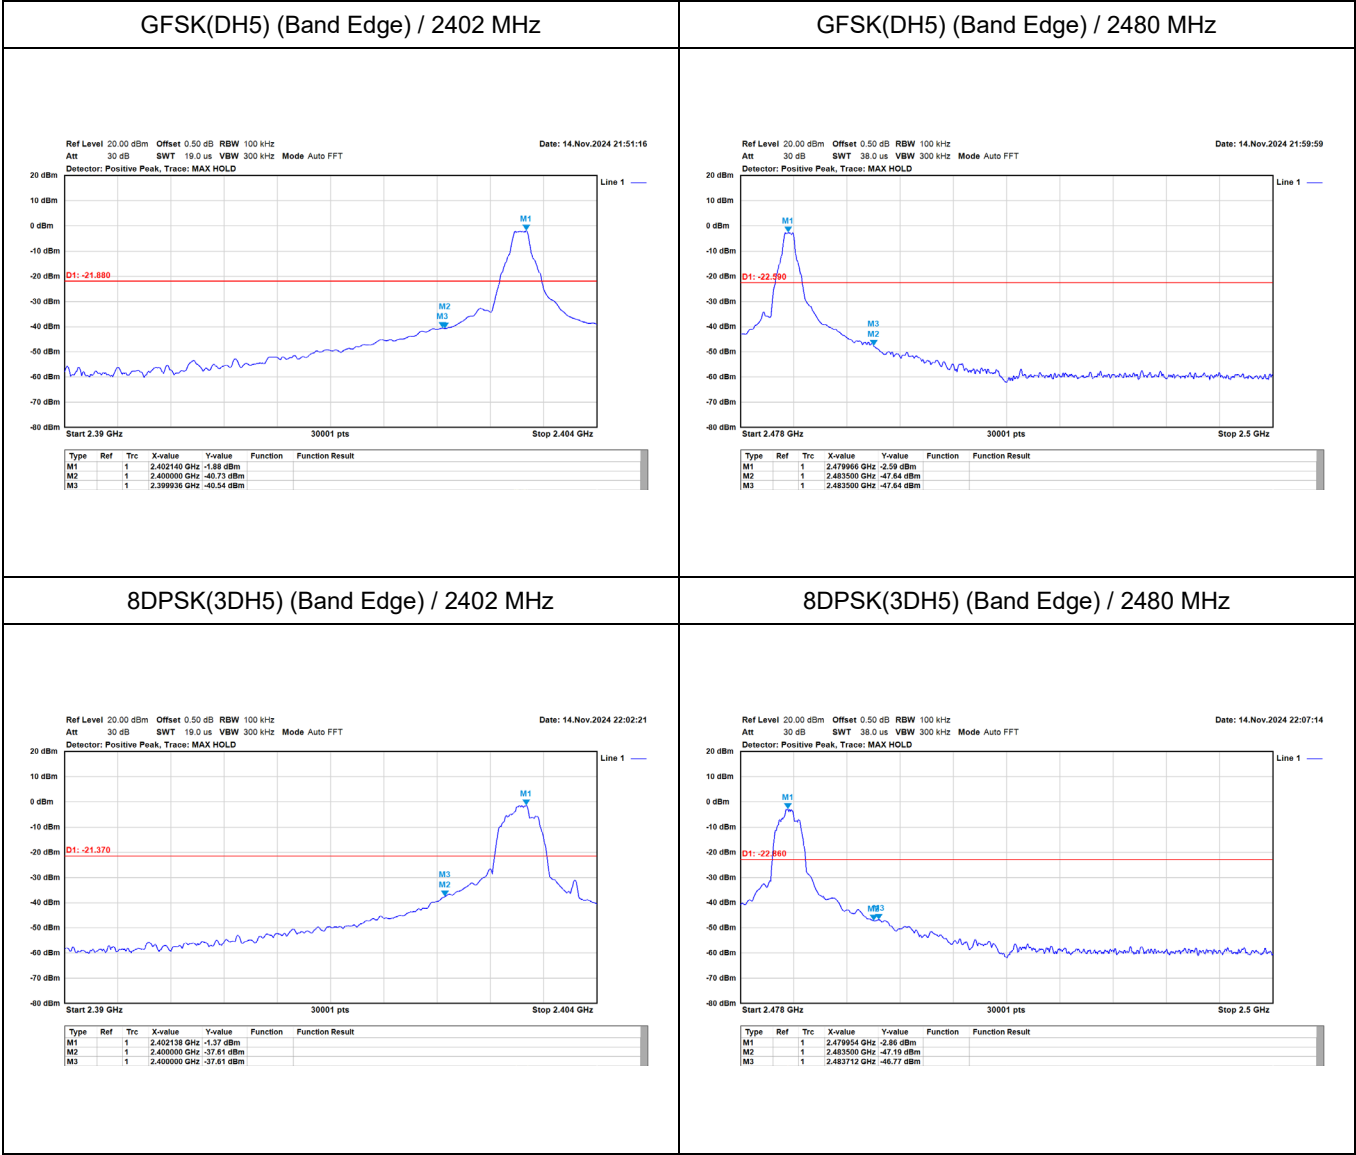


Hopping on

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
8DPSK	> 20	Pass


GFSK(DH5) (Band Edge Hopping) / 2402 MHz

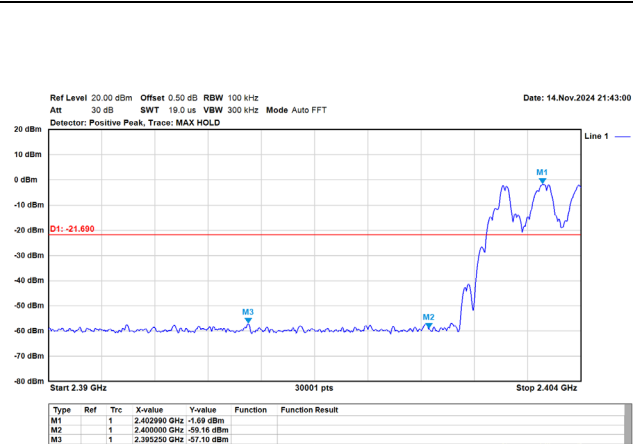


GFSK(DH5) (Band Edge Hopping) / 2480 MHz

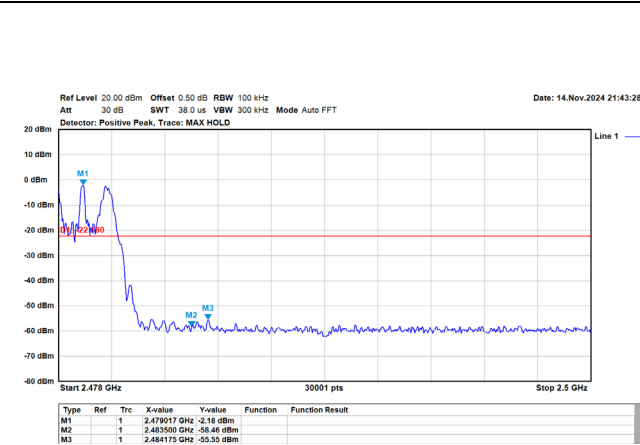

8DPSK(3DH5) (Band Edge Hopping) / 2402 MHz

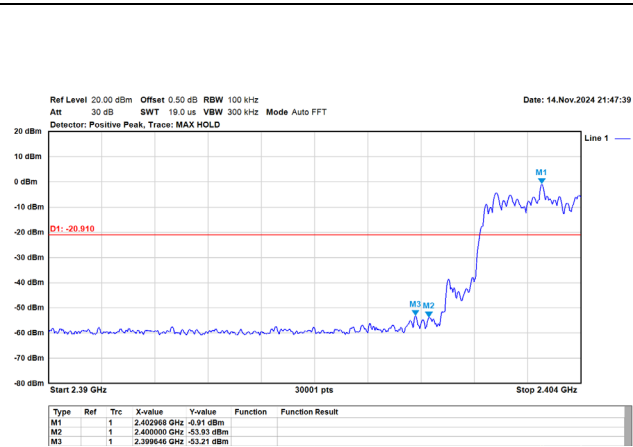


8DPSK(3DH5) (Band Edge Hopping) / 2480 MHz

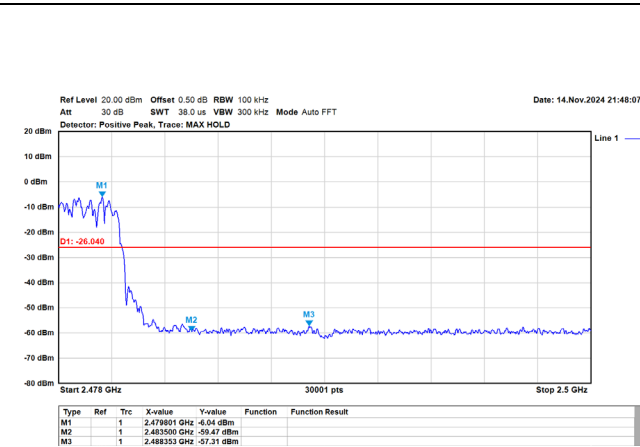

Appendix H. Test Result of Radiated Emission

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Tx_btlm_2402MHz
TEST BY :Caster

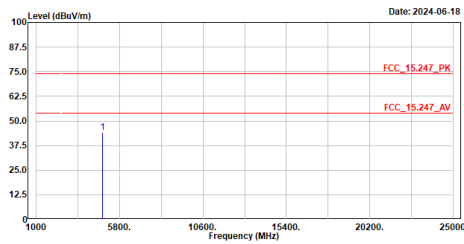


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	44.13	74.00	-29.87	58.95	-14.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Tx_btlm_2402MHz
TEST BY :Caster

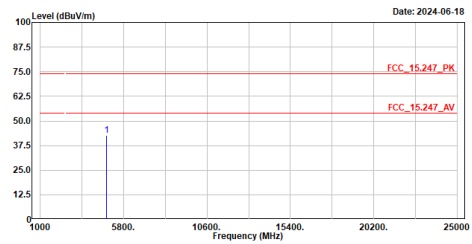


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	42.82	74.00	-31.18	57.64	-14.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Tx_btlm_2441MHz
TEST BY :Caster

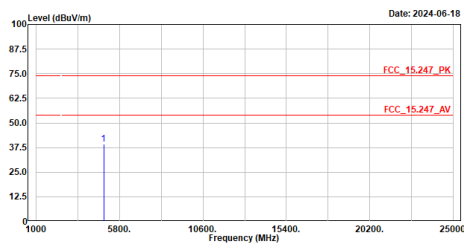


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	39.25	74.00	-34.75	53.82	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Tx_btlm_2441MHz
TEST BY :Caster

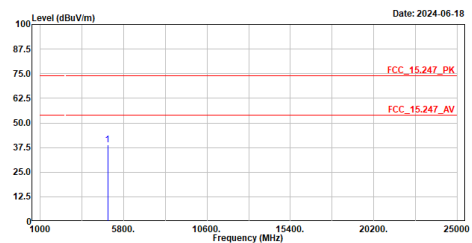


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	39.06	74.00	-34.94	53.63	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Tx_btlm_2480MHz
TEST BY :Caster

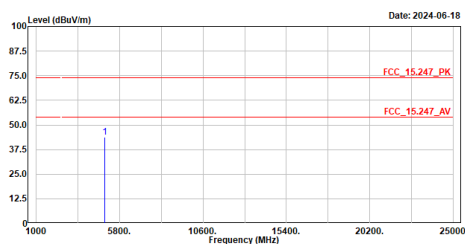


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	43.64	74.00	-30.36	57.96	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Tx_btlm_2480MHz
TEST BY :Caster

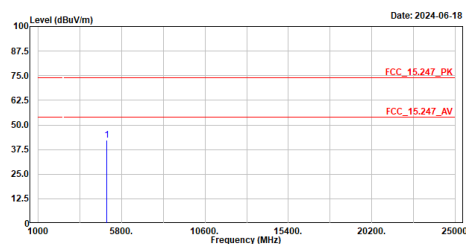


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	42.35	74.00	-31.65	56.67	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Tx_btlm_2480MHz
TEST BY :Caster

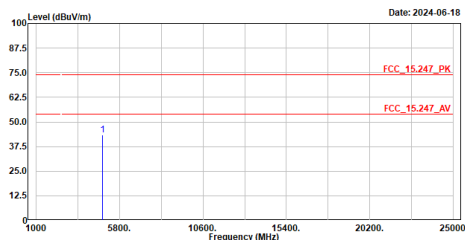


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	43.29	74.00	-30.71	58.11	-14.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Tx_btlm_2480MHz
TEST BY :Caster

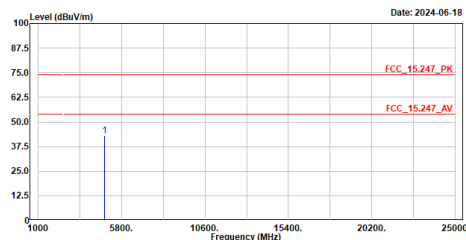


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	43.02	74.00	-30.98	57.84	-14.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Tx_bt3m_2441Mhz
TEST BY :Caster

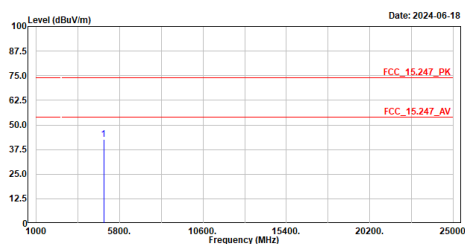


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	42.52	74.00	-31.48	57.09	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Tx_bt3m_2441Mhz
TEST BY :Caster

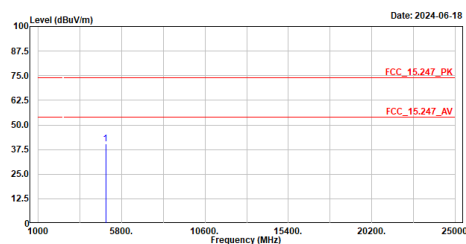


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4882.000	40.40	74.00	-33.60	54.97	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Tx_bt3m_2480Mhz
TEST BY :Caster

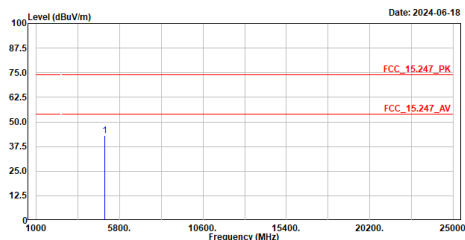


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	42.91	74.00	-31.09	57.23	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Tx_bt3m_2480Mhz
TEST BY :Caster

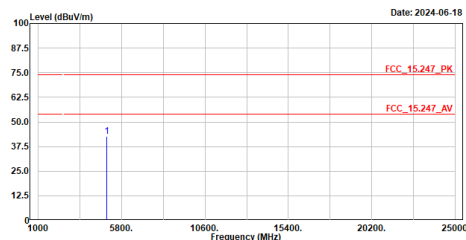


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	42.47	74.00	-31.53	56.79	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

USB Port 1

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Tx_bt3m_2441Mhz
TEST BY :Caster

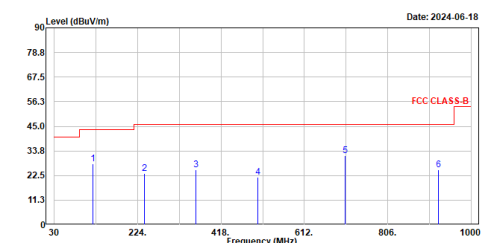


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	120.210	27.73	43.50	-15.77	53.88	-26.15	QP
2	239.520	23.47	46.00	-22.53	48.45	-24.98	QP
3	358.830	25.24	46.00	-20.76	46.96	-21.72	QP
4	504.330	21.58	46.00	-24.42	39.42	-17.84	QP
5	706.090	31.54	46.00	-14.46	45.47	-13.93	QP
6	923.370	25.13	46.00	-20.87	36.12	-18.99	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Tx_bt3m_2441Mhz
TEST BY :Caster

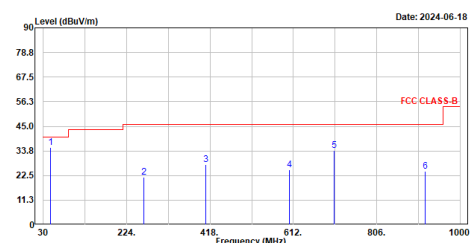


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	47.460	35.45	40.00	-4.55	58.81	-23.36	QP
2	264.740	21.77	46.00	-24.23	45.93	-24.16	QP
3	408.300	27.36	46.00	-18.64	47.34	-19.98	QP
4	603.270	25.05	46.00	-20.95	40.34	-15.29	QP
5	706.090	33.93	46.00	-12.07	47.86	-13.93	QP
6	918.520	24.48	46.00	-21.52	35.63	-11.15	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

USB Port 2

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Tx_bt3m_2441Mhz
TEST BY :Caster

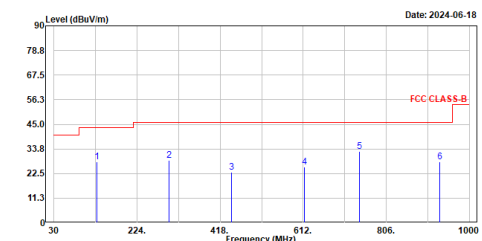


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	129.910	27.91	43.50	-15.59	53.11	-25.20	QP
2	298.690	28.41	46.00	-17.59	51.44	-23.03	QP
3	445.160	23.01	46.00	-22.99	41.91	-18.90	QP
4	614.910	25.37	46.00	-20.63	40.72	-15.35	QP
5	742.950	32.71	46.00	-13.29	45.89	-13.18	QP
6	931.130	27.93	46.00	-18.07	38.84	-16.91	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Tx_bt3m_2441Mhz
TEST BY :Caster

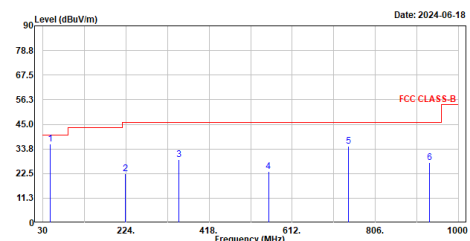


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	47.460	35.87	40.00	-4.13	59.23	-23.36	QP
2	223.030	22.35	46.00	-23.65	48.57	-26.22	QP
3	347.190	28.73	46.00	-17.27	50.58	-21.85	QP
4	556.710	23.42	46.00	-22.58	40.25	-16.83	QP
5	742.950	34.83	46.00	-11.17	48.01	-13.18	QP
6	933.070	27.52	46.00	-18.48	38.43	-16.91	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
 Condition :3m ,Horizontal
 Mode :Tx_bt1M_2402MHz
 TEST BY :Peter

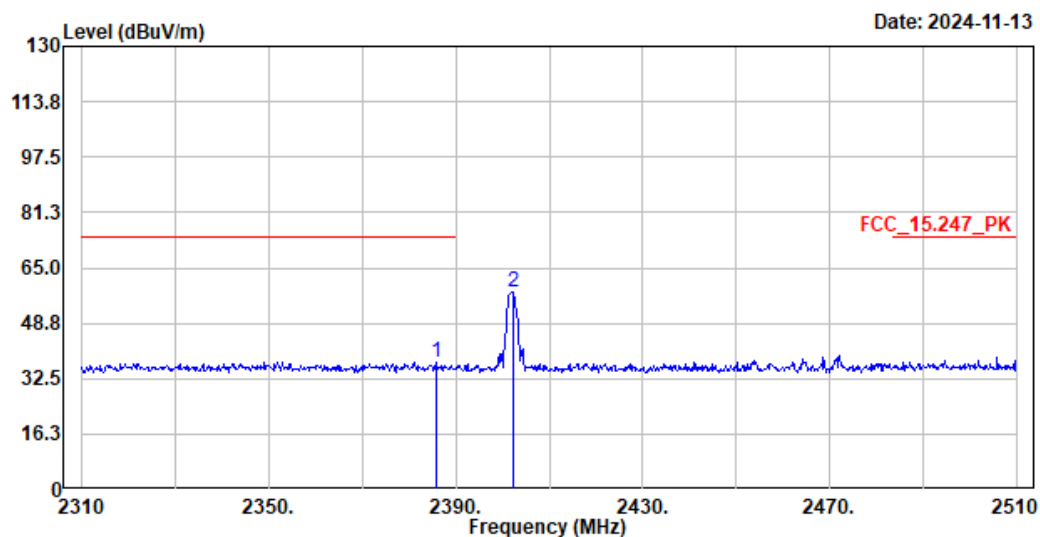

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.800	37.26	74.00	-36.74	31.42	5.84	Peak
2	2402.200	57.91	-----	-----	52.11	5.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2385.8	37.26	-24.913	12.347	-41.653	54.000
2402.2	57.91	-24.913	32.997	--	--

Site :HY-CB01
 Condition :3m ,Vertical
 Mode :Tx_bt1M_2402MHz
 TEST BY :Peter

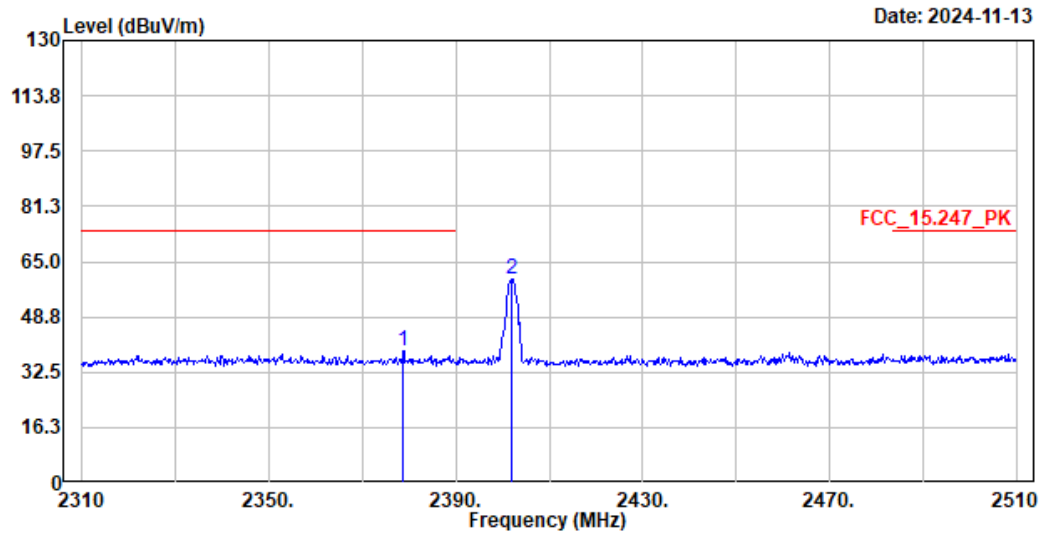

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2378.800	38.95	74.00	-35.05	33.18	5.77	Peak
2	2402.000	59.86	-----	-----	54.06	5.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2378.8	38.95	-24.913	14.037	-39.963	54.000
2402	59.86	-24.913	34.947	--	--

Site :HY-CB01
 Condition :3m ,Horizontal
 Mode :Tx_bt1M_2480MHz
 TEST BY :Peter

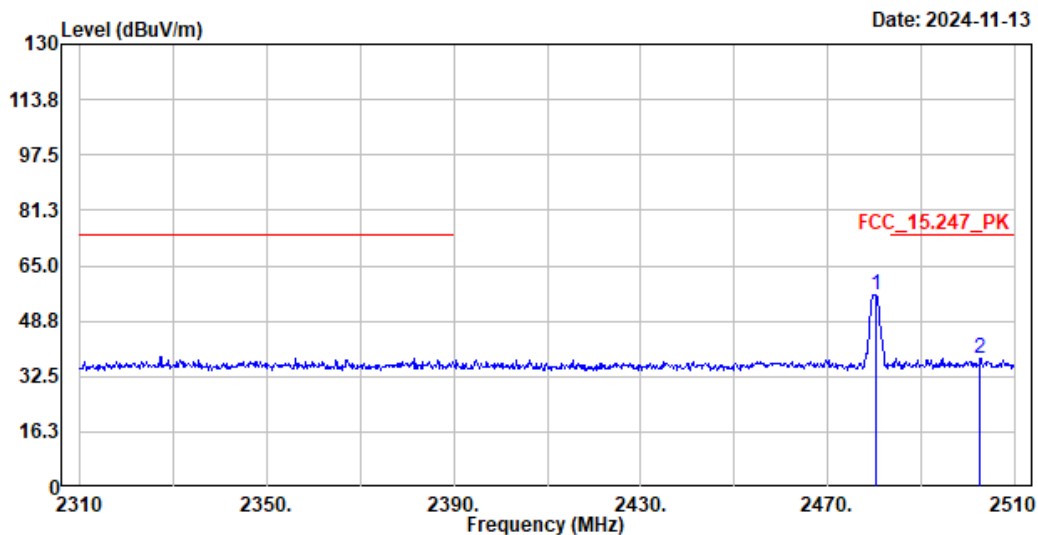

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.200	56.59	-----	-----	50.87	5.72	Peak
2	2502.600	37.84	74.00	-36.16	32.09	5.75	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	56.59	-24.913	31.677	--	--
2502.6	37.84	-24.913	12.927	-41.073	54.000

Site :HY-CB01
 Condition :3m ,Vertical
 Mode :Tx_bt1M_2480MHz
 TEST BY :Peter

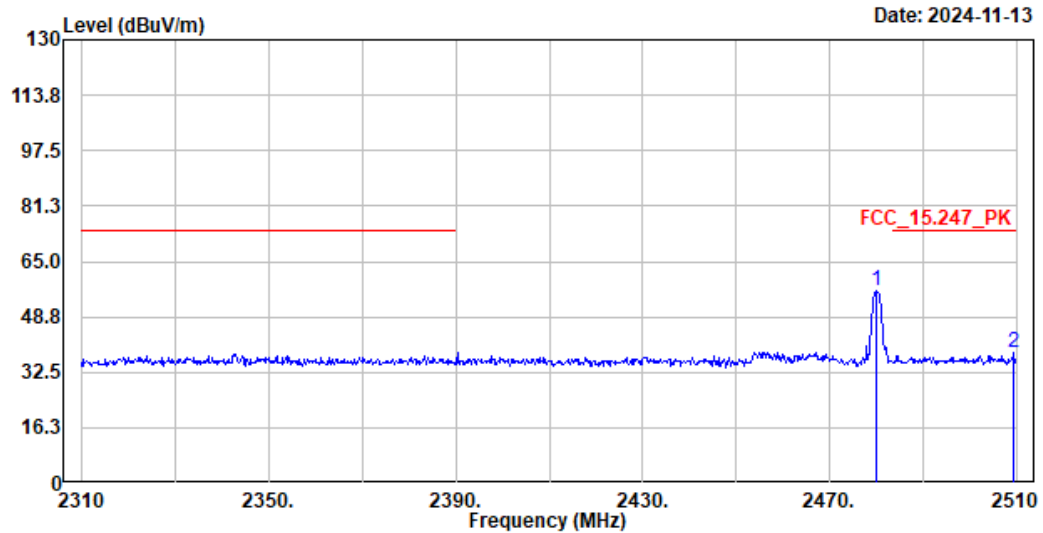

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	56.26	-----	-----	50.54	5.72	Peak
2	2509.400	38.10	74.00	-35.90	32.32	5.78	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2480	56.26	-24.913	31.347	--	--
2509.4	38.1	-24.913	13.187	-40.813	54.000

Site :HY-CB01
 Condition :3m ,Horizontal
 Mode :Tx_bt3M_2402MHz
 TEST BY :Peter

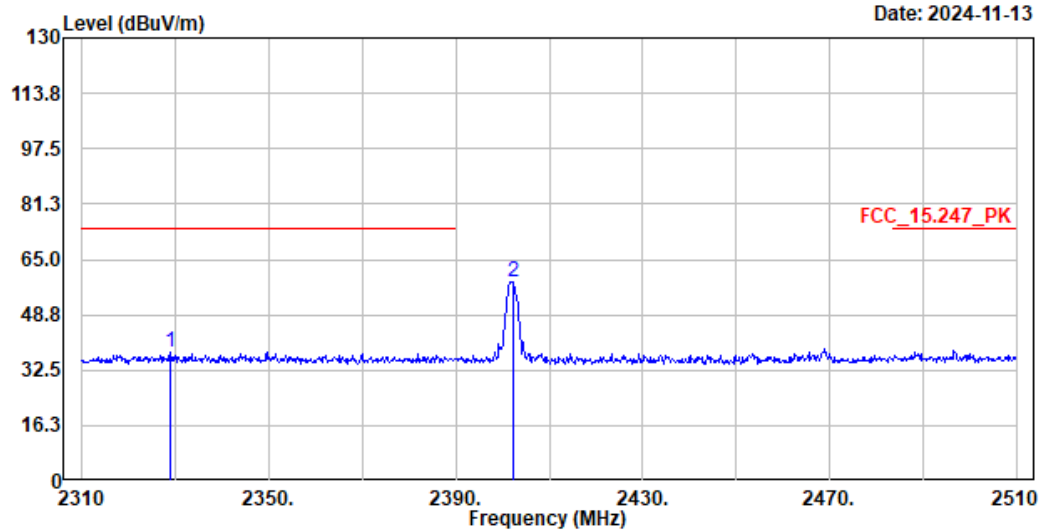

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
			Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2329.000	37.61	74.00	-36.39	31.89	5.72	Peak
2	2402.200	58.42	-----	-----	52.62	5.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2329	37.61	-24.913	12.697	-41.303	54.000
2402.2	58.42	-24.913	33.507	--	--

Site :HY-CB01
 Condition :3m ,Vertical
 Mode :Tx_bt3M_2402MHz
 TEST BY :Peter

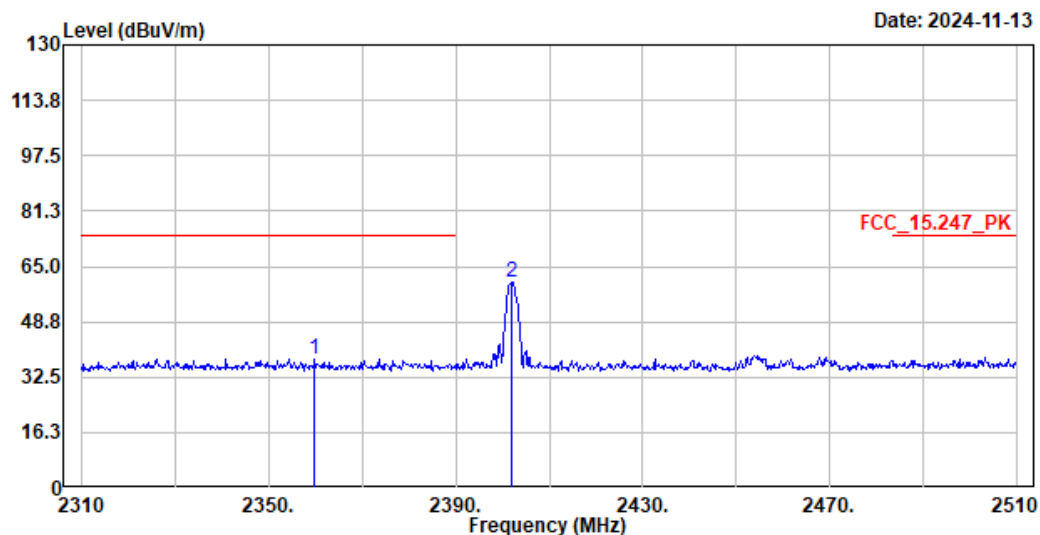

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2359.800	37.77	74.00	-36.23	32.01	5.76	Peak
2	2402.000	60.33	-----	-----	54.53	5.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2359.8	37.77	-24.913	12.857	-41.143	54.000
2402	60.33	-24.913	35.417	--	--

Site :HY-CB01
 Condition :3m ,Horizontal
 Mode :Tx_bt3M_2480MHz
 TEST BY :Peter

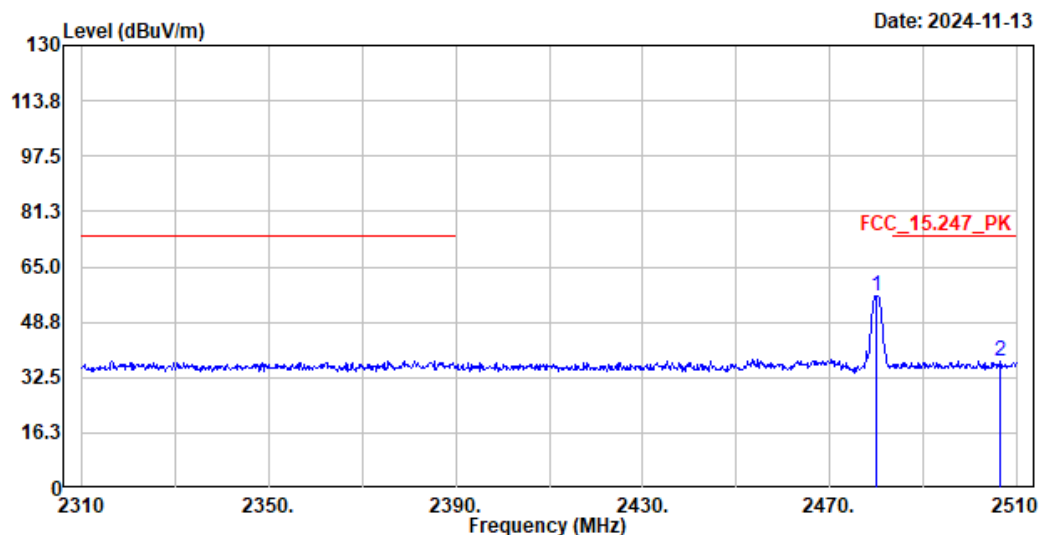

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	56.50	-----	-----	50.78	5.72	Peak
2	2506.400	37.39	74.00	-36.61	31.63	5.76	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2480	56.5	-24.913	31.587	--	--
2506.4	37.39	-24.913	12.477	-41.523	54.000

Site :HY-CB01
 Condition :3m ,Vertical
 Mode :Tx_bt3M_2480MHz
 TEST BY :Peter

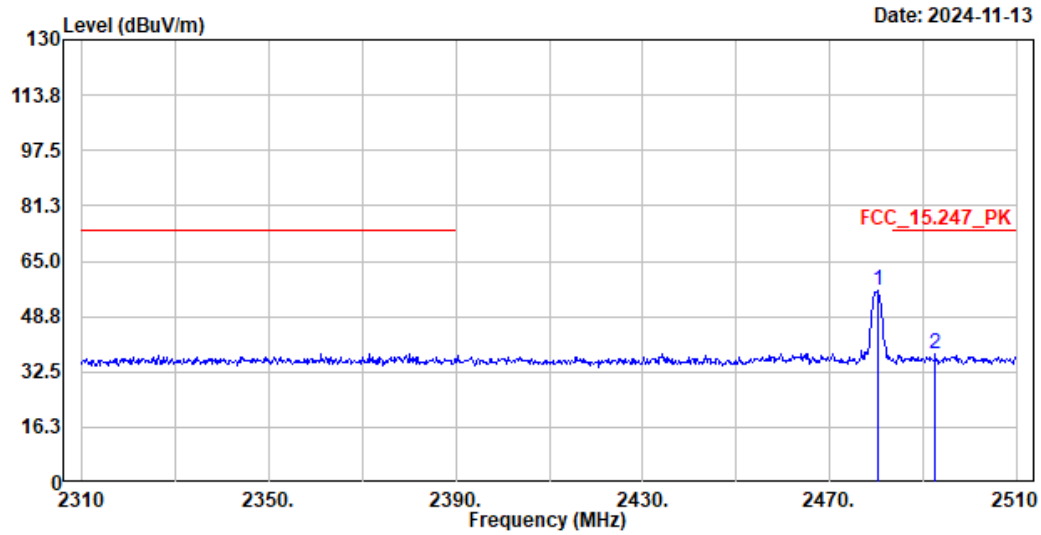

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2480.200	56.19	-----	-----	50.47	5.72	Peak
2	2492.600	37.94	74.00	-36.06	32.20	5.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	56.19	-24.913	31.277	--	--
2492.6	37.94	-24.913	13.027	-40.973	54.000