
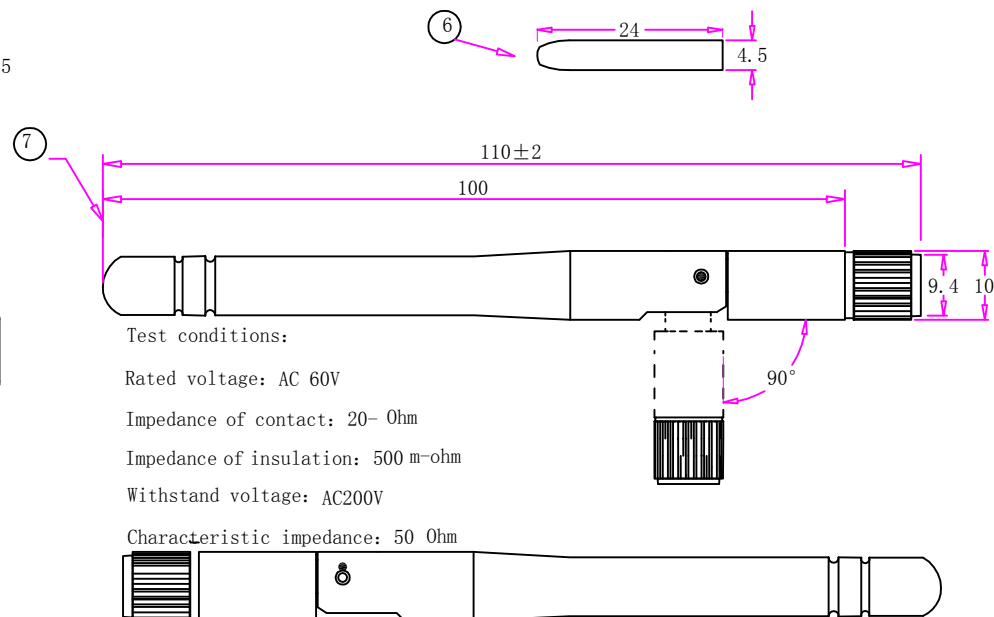



REV	DATE	DESCRIPTION	NAME

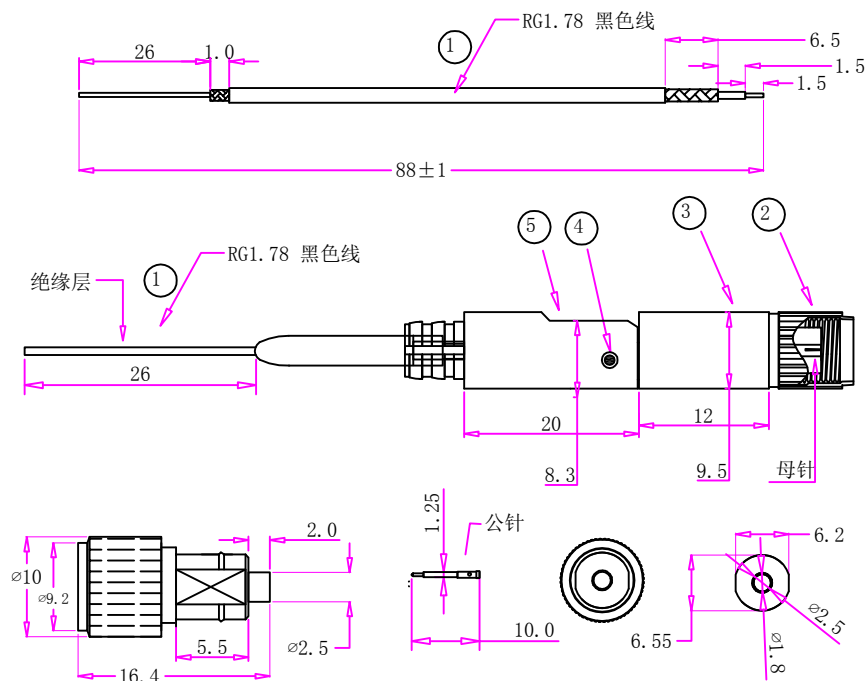

Characteristic impedance: 50 Ohm

1. The finished product shall be 100% test
conduction OK
2. The finished product shall be 100%
inspected.
3. Adopt environmentally friendly
manufacturing process.
4. Finished product

频率范围 (FREQUENCY RANGE)	2400-2500 MHz
增益 (Gain)	2dBi
电压驻波比 (VSWR)	<2.0: 1
极化 (Polarzation)	Linear.Vertical
最大功率 (Mae power rating)	50 w
特性阻抗 (Lmpedance)	50 OHM



[illegible]

零件名称 (PART NAME)	单位 (UNIT)	比例 (SCALE)	版本 (REV)	幅面(SIZE)
组立图 mm			A3	A4
客户料号 (CUS NO.)	产品名称 (PRODUCT NAME)		产品型号 (PRODUCT NO.)	
	SMA-2. 4G-178黑-L108		3030-0004	
测试 TESTER	第1页, 共1页		第4版日期 (ORIGINAL DATE)	
审核 CHK.			2026.03.5	
核准 APPD.	Shenzhen Tianxing Electronics Co., Ltd. Room 306, No. 24-2, Wugang Road, Xixing Community, Yuanshan Street, Longgang District, Shenzhen			

Shenzhen Tianxing Electronics Co., Ltd.
Room 806, No. 24-2, Wugang Road, Xikeng Community, Yuanshan Street, Longgang District, Shenzhen

Antenna SampleConfirmation From

Antenna passive gain and efficiency

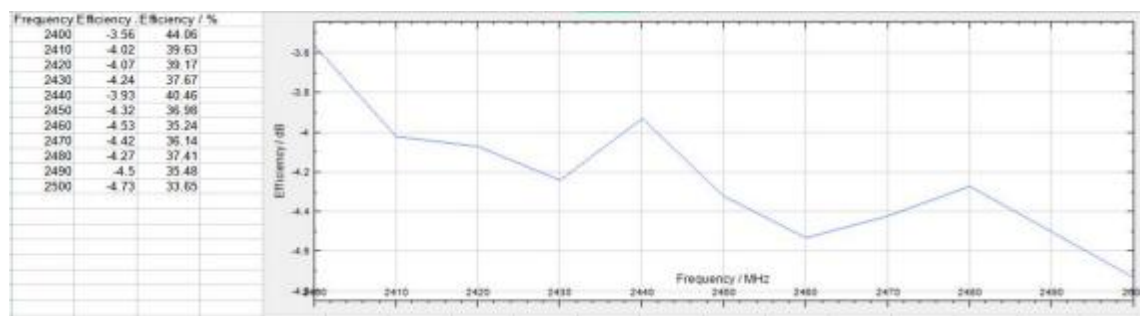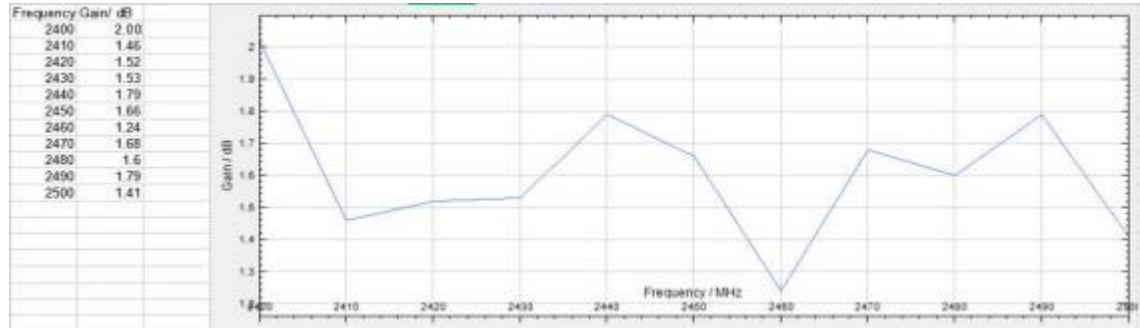

Antenna SampleConfirmation From

