

TEST REPORT

**STANDARD : FCC Part15B Class B -Scanning Receiver-
RSS-215 Issue 2**

Applicant	Testing Laboratory
JVCKENWOOD Corporation 1-16-2, Hakusan, Midori-ku, Yokohama-shi, Kanagawa, 226-8525 Japan Tel. +81 45 939 6254	Intertek Japan K.K. Matsuda Laboratory (Open area test site) 1283 Yadoriki, Matsuda-machi, Ashigarakami-gun, Kanagawa-ken, 258-0001 Japan Tel.: +81 465 89 2316 Fax.: +81 465 89 2160 URL: http://www.japan.intertek-etlsemko.com

Equipment Type	HF/50MHz TRANSCEIVER
Trademark	KENWOOD
Model(s)	TS-890S
Serial No.	B8790012
Equipment Authorization	Certification
FCC ID :	K44512001
ISED CN and UPN No.	282F-512001
PMN (ISED)	TS-890S
HVIN (ISED)	TS-890S-21
Test Result	Complied
Report Number	21050183JMA-001
Original Issue Date	June 9 2021

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. (This test report shall not be reproduced except in full, without written approval of Intertek Japan K. K.) Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Approved by

H. Kosemura

Hideaki Kosemura
[Reviewer]

Tested by

N. Murakami

Naohei Murakami
[Engineer]



Tested by

Y. Yoneyama

Yoshiaki Yoneyama
[Engineer]



NVLAP LAB CODE 600234-0

NVLAP accreditation are valid for RSS-215.

FCC Part15B is outside the NVLAP scope.

This report contains data that are not covered by the NVLAP accreditation.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Responsible Party of Test Item (Product)

Responsible Party :
Add. :
Tel. :
Contact Person :

TABLE OF CONTENTS

	Page
SECTION 1. GENERAL INFORMATION	3
SECTION 2. SUMMARY OF TEST RESULTS	4
SECTION 3. EQUIPMENT UNDER TEST	5
SECTION 4. SUPPORT EQUIPMENT.....	7
SECTION 5. USED CABLE(S).....	8
SECTION 6. TEST CONFIGURATION	9
SECTION 7. OPERATING CONDITION	11
SECTION 8. UNCERTAINTY	12
SECTION 9. EVALUATION OF TEST RESULTS	13
SECTION 10. LIST OF MEASURING INSTRUMENTS.....	57
ANNEX	60

APPENDIX PHOTOGRAPHS OF MAXIMUM EMISSION SET-UP

SECTION 1. GENERAL INFORMATION

Test Performed

EUT Received	May 14, 2021
Date of Test	From May 26, 2021 to June 2, 2021
Tested Location	Matsuda No.1 test site and Matsuda No.2 test site
Standard Applied (Regulation Applied)	FCC Part15B -Scanning Receiver- RSS-215 Issue 2
Test methods	ANSI C63.4-2014 / RSS-GEN Issue 5
Deviation from Standard(s)	None

As for the ICES-003 "Digital Apparatus", the EUT has been measured.

Refer to report No. 21050183JMA-003.

As for the FCC Part15B Class B "Peripherals", the EUT has been measured.

Refer to report No. 21050183JMA-002.

Qualifications of Testing Laboratory

Accreditation/Recognition	Scope	Lab. Code	Remarks
VLAC	Wireless / EMC Testing	VLAC-008-3	JAPAN
NVLAP	Wireless / EMC Testing	600234-0	USA
FCC	Wireless / EMC Testing	JP0009	USA
ISED	Wireless Testing	JP0004 (CABID)	CANADA
BSMI	EMC Testing	SL2-IN-E-6009	TAIWAN
SABS	EMC Testing	N/A	South Africa
Filing			
VCCI	EMC Testing	A-0127	JAPAN

Abbreviations

EUT	Equipment Under Test	DoC	Declaration of Conformity
AE	Associated Equipment	SDoC	Supplier's Declaration of Conformity
AMN	Artificial Mains Network	ISN	Impedance Stabilization Network
LISN	Line Impedance Stabilization Network	CDN	Coupling Decoupling Network
AMP	Amplifier	Q-P	Quasi-peak
ATT	Attenuator	AVG	Average
ANT	Antenna	PK	Peak
BBA	Broadband Antenna	Cal	Calibration
DIP	Dipole Antenna	LCD	Liquid-Crystal Display
HDMI	High-Definition Multimedia Interface	N/A	Not applicable or Not available

SECTION 2. SUMMARY OF TEST RESULTS

See Section9 for the detailed result.

Emission Tests

Standard (Regulation) Applied		FCC Part15B Class B -Scanning Receiver- RSS-215 Issue 2	
Test Item	Minimum margin	Results	Remarks
Conducted disturbance at mains terminals	3.7 dB (0.2014 MHz) [Q-P] RX mode(59.9999MHz)	Pass	-
Radiated disturbance	0.9 dB (310.16 MHz) RX mode(VFO SCAN)	Pass	-
Conducted power on antenna port	1.8 dB (35.7486 MHz) RX mode(VFO SCAN:ANT1)	Pass	-
	1.8 dB (35.7542 MHz) RX mode(VFO SCAN:ANT2)		

Test Item	Results	Remarks
38dB Rejection test (15.121(b))	Pass	See Note

Note : No frequency of response was detected.

SECTION 3. EQUIPMENT UNDER TEST

The equipment under test (EUT) consisted of the following apparatus.

The information of this section is provided by the Applicant or customer. Intertek doesn't take any responsibility for the information.

3.1 System Configuration

Symbol	Item	Model No.	Serial No.	Manufacturer	Remarks
A	HF/50MHz TRANSCIVER	TS-890S	B8790012	JVCKENWOOD Corporation	
Rated Power : DC 13.8 V $\pm$ 15%, 3.0Amax					
Supplied Power :DC 13.8V					
Condition of Equipment		Prototype			
Type		Tabletop			
Suppression Devices		No Modifications by the laboratory were made to the device			

3.2 Overview of EUT

Frequency Ranges	0.1 – 60 MHz
Conversion Type	Double conversion

3.3 Intermediate frequency

1st	8.248 MHz
2nd	24 kHz (except FM)
3rd	36 kHz (FM)

3.4 Highest Frequency Generated / Used

Operating Frequency	Operating mode	Remarks
3.633 GHz	RX mode	

3.5 Port(s)/Connector(s)

Port Name	Connector Type	Connector Pin	Remarks
MIC	Metal type	8 pin	
PHONES	Φ6.3 Phone Jack	3 pin	
PADDLE	Φ6.3 Phone Jack	3 pin	
USB	USB-A	4 pin	
Ext. AT	Square shape type	6 pin	
ANT1	M	2 pin	
ANT2	M	2 pin	
ANT OUT	RCA	2 pin	
RX IN	RCA	2 pin	(ANTRX)
RX OUT	RCA	2 pin	
DRV	RCA	2 pin	
KEY	Φ6.3 Phone Jack	3 pin	
ACC2	DIN	13 pin	
REMOTE	DIN	7 pin	
COM	D-SUB	9 pin	
LAN	RJ-45 Modular	8 pin	
DISPLAY	DVI-I	29 pin	
USB	USB-A	4 pin	
USB	USB-B	4 pin	
SP	Φ3.5 Phone Jack	3 pin	
KEYPAD	Φ3.5 Phone Jack	3 pin	
METER	Φ3.5 Phone Jack	3 pin	
REF IN	BNC	2 pin	
GND	Wing Nut type	1 pin	

SECTION 4. SUPPORT EQUIPMENT

The EUT was supported by the following equipment during the test.

Symbol	Item	Model No.	Serial No.	Manufacturer	FCC ID
B	DC Power Supply	PS-60	11/01 00148	JVC KENWOOD	N/A
C	Speaker	SP-23	None	JVC KENWOOD	N/A
D	Keyboard	KB216	CN-0CJCVG-LO300-89K-18KJ-A03	DELL	SDoC
E	HUB	SF100D-05	J16070C87	CISCO	SDoC
F	LCD(DVI)	HSTND-2801-W (ZR22W)	CN40160HSZ	HP	SDoC
G	Microphone	MC-47	0019048155894	JVC KENWOOD	N/A
H	Headphone	HS-6	TS-K023	JVC KENWOOD	N/A
I	Computer	HP 280 C3 SFF	8CG9237KKC	HP	SDoC
J	Keyboard	SK-2120	BEXKE0CCPC04AE	HP	SDoC
K	Mouse	MOFYUO	FCMHH0AFAC78L4	HP	SDoC
L	AC Adapter	MU06-6120050-A1	0432-011X000	CISCO	N/A
M	Terminator	CT-01	EM117	TME	N/A
N	Terminator	CT-01	EM120	TME	N/A
O	Terminator	None	None	JVC KENWOOD	N/A
P	Terminator	None	None	JVC KENWOOD	N/A
Q	Terminator	None	None	JVC KENWOOD	N/A
R	USB Memory	U273	95121270079086	pq1	SDoC
S	LCD(VGA)	V203p	6CM92110KR	HP	SDoC
T	Printer	K10231	FBUJ89883	Canon	SDoC
U	Headset	HS-HP10SV	None	ELECOM	N/A
Supplied Power:					
B, F, I, L, S, T, U		AC120 V, 60 Hz			

Note: The information except Symbol F, I, J, K, S and T are provided by the Applicant or customer. Intertek doesn't take any responsibility for the information.

SECTION 5. USED CABLE(S)

The following cable(s) was used for the test.


No.	Name	Length (m)	Shield	Metal Connector	Ferrite Core
1	MIC cable	0.45	No	Yes	
2	HEAD PHONE cable	1.50	No	No	
3	PADDLE cable	1.00	No	No	
4	Power cable for EUT (DC)	1.80	No	No	
5	Speaker cable	1.00	No	No	
6	USB Keyboard cable	2.20	Yes	Yes	
7	LAN cable	1.00	No	No	
8	DVI-D cable	1.10	Yes	Yes	
9	REF cable	1.00	Yes	Yes	
10	KEYPAD cable	1.00	No	No	
11	DRV cable	1.00	No	No	
12	ACC cable	1.00	No	No	
13	REMOTE cable	1.00	No	No	
14	METER cable	1.00	No	No	
15	KEY cable	1.00	No	No	
16	COM cable	1.50	Yes	Yes	
17	AT cable	1.00	No	No	
18	GND cable	2.20	No	No	
19	USB cable	2.00	Yes	Yes	
20	Power cable for DC Power Supply (AC)	2.00	No	No	
21	Power cable for Hub (DC)	1.50	No	No	
22	Power cable for LCD(DVI)	1.70	No	No	
23	Mouse cable	1.80	Yes	Yes	
24	Keyboard cable	1.70	Yes	Yes	
25	Centronics cable	2.00	Yes	Yes	
26	VGA cable	1.50	Yes	Yes	
27	Power cable for Computer	1.90	No	No	
28	Power cable for LCD(VGA)	2.00	No	No	
29	Power cable for Printer(AC)	1.70	No	No	
30	Headset cable	1.80	No	No	

Note: The information except No.19, No.22, No.23, No.24, No.25, No.26, No.27, No.28, No.29 and No.30 cables are provided by the Applicant or customer. Intertek doesn't take any responsibility for the information.

SECTION 6. TEST CONFIGURATION

6.1 Conducted disturbance at mains terminals Tests, Radiated disturbance tests and Conducted power on antenna port


* : EUT

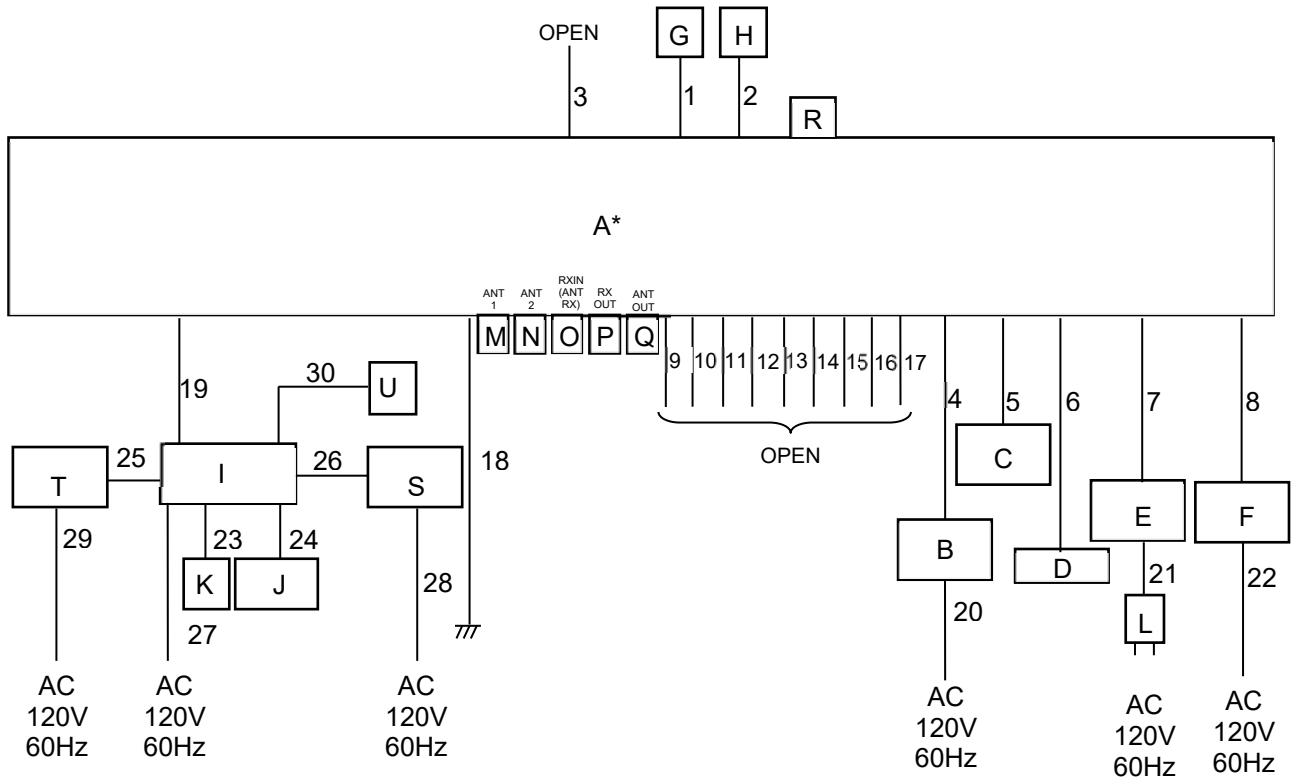

The symbols and numbers assigned to the equipments and cables on this diagram correspond to the ones in Sections 3 to 5.

6.2 38dB Rejection Tests

* : EUT

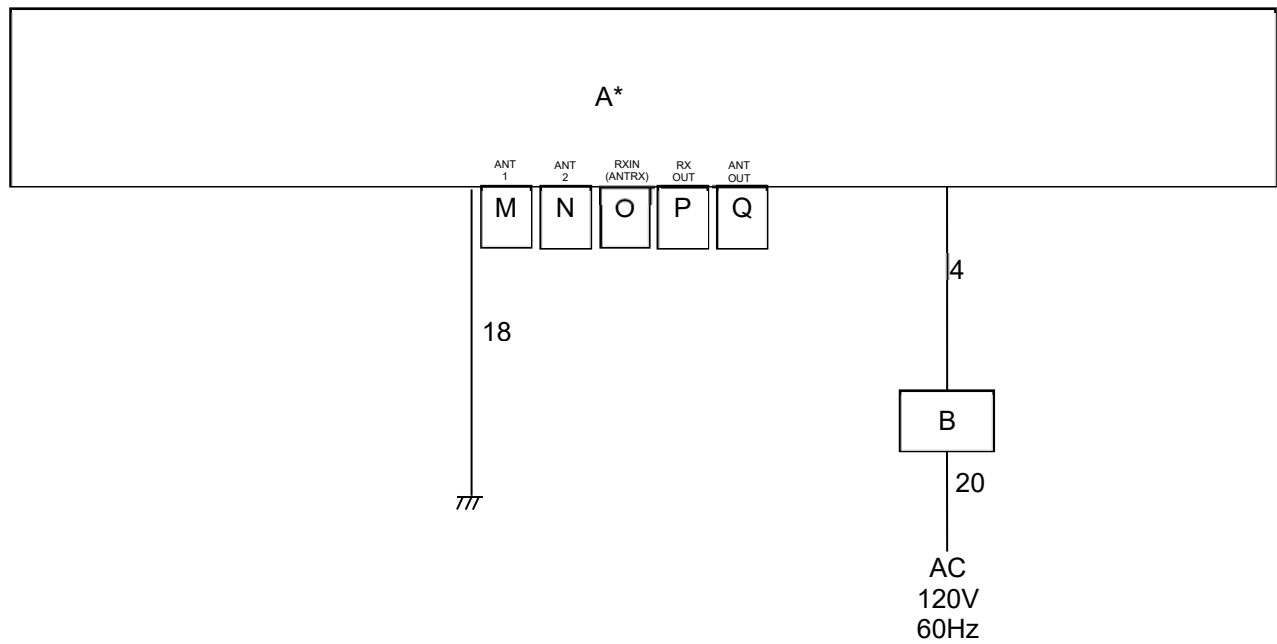

The symbols and numbers assigned to the equipments and cables on this diagram correspond to the ones in Sections 3 to 5.


SECTION 7. OPERATING CONDITION

The test was carried out under the following mode.

The information of this section is provided by the Applicant or customer. Intertek doesn't take any responsibility for the information.


7.1 RX mode

Cycle time for operation: Continuity

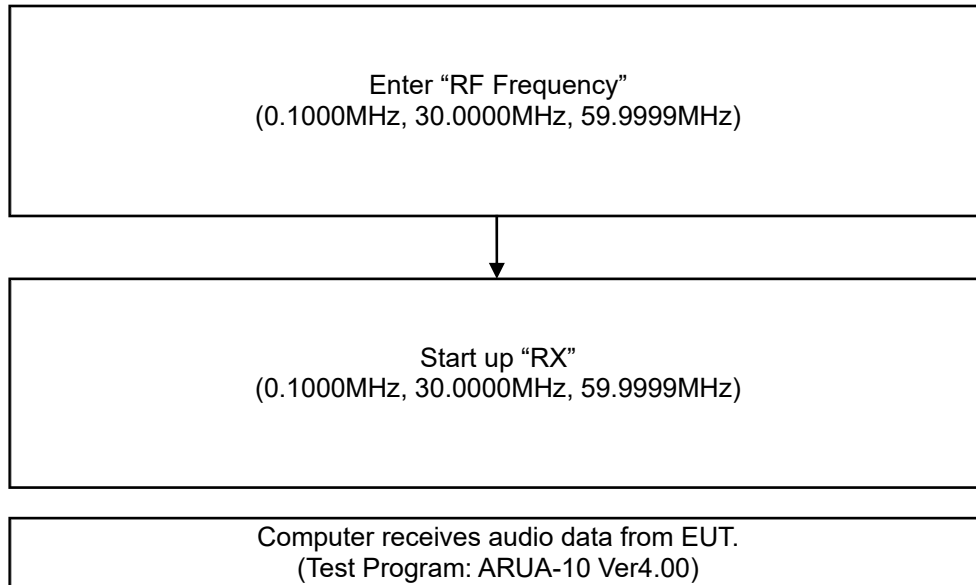

7.2 RX mode (VFO SCAN)

Cycle time for operation: Continuity

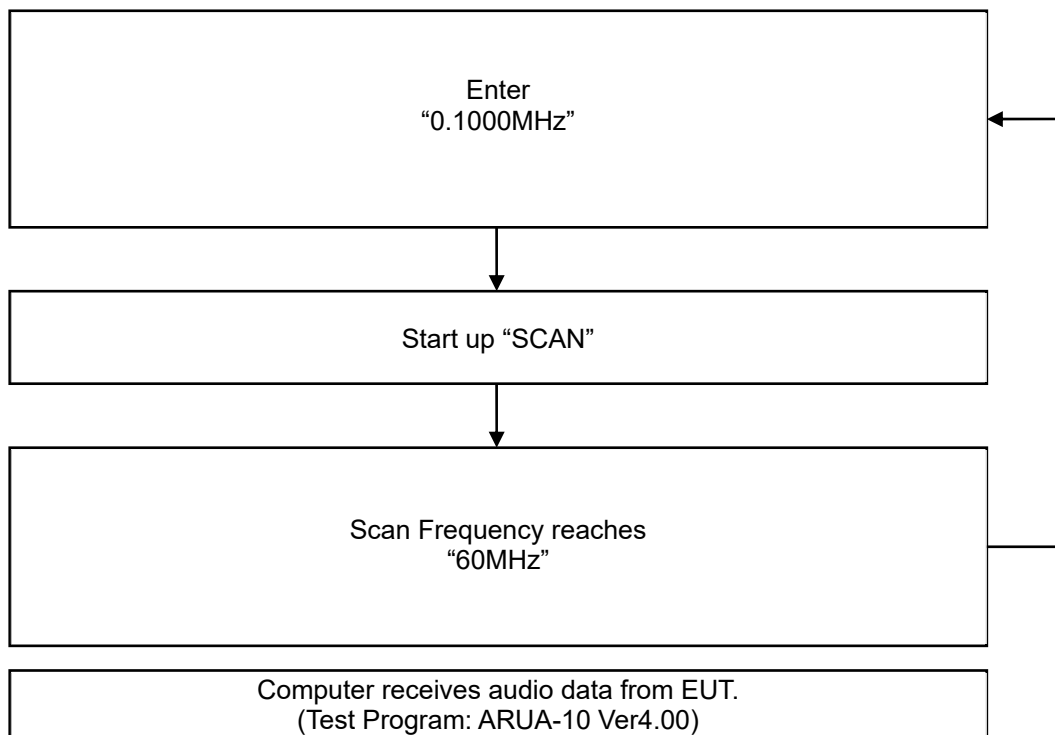

SECTION 8. UNCERTAINTY

Traceability to national standard in SI units is ensured with these values.
 Compliance with the limits in this standard are determined without in consideration of the measurement uncertainty of the measurement instrumentation.

8.1 Emission tests

Radiated disturbance at 3m	U _{lab} [k = 2]	U _{cispr}
30 MHz – 1000 MHz	+/- 5.21 dB	6.3 dB
Above 1 GHz	+/- 4.82 dB	5.2 dB
Radiated disturbance at 10m		
30 MHz – 1000 MHz	+/- 5.29 dB	6.3 dB
Above 1 GHz	-	-
Radiated disturbance at 30m		
	N/A	Nil
Conducted disturbance at mains terminals		
9 kHz – 150 kHz	+/- 1.49 dB	3.8 dB
150 kHz – 30 MHz	+/- 1.56 dB	3.4 dB
Conducted disturbance at telecommunication ports (ISN)		
150 kHz – 30 MHz	+/- 3.22 dB	5.0 dB
Conducted disturbance at telecommunication ports (Capacitive Voltage Probe)		
150 kHz – 30 MHz	+/- 2.92 dB	3.9 dB
Conducted disturbance at telecommunication ports (Current Probe)		
150 kHz – 30 MHz	+/- 1.65 dB	2.9 dB
Conducted disturbance at terminals		
150 kHz – 30 MHz	+/- 1.52 dB	2.9 dB
Disturbance power		
30 MHz – 300 MHz	+/- 2.83 dB	4.5 dB
Conducted power on antenna port		
30 MHz – 1000 MHz	+/- 1.80 dB	Nil
Above 1 GHz	+/- 2.48 dB	
38dB Rejection		
0.1 MHz – 600 MHz	+/- 0.64 dB	Nil

The above expanded instrumentation uncertainty, U_{lab}, is estimated in accordance with CISPR 16-4-2:2011.

SECTION 9. EVALUATION OF TEST RESULTS

9.1 Emission tests

9.1.1 Conducted disturbance at mains terminals

Location	Matsuda No.2 Test Site.
Test Engineer	Naohei Murakami

Frequency Range of Measurements

Required Measurement Frequency Range	Measured Frequency Range
0.15 – 30 MHz	0.15 – 30 MHz

Test Procedure

Item	Document number
Conducted disturbance at mains terminals	LEN-RJP-EM001

Setting for the Measuring instruments

Instrument	Detector	Resolution Bandwidth	Video Bandwidth
Receiver	Quasi Peak	10 kHz	N/A
	Average	10 kHz	N/A

< Measurement data correction >

Emission Level [dBuV] = Meter Reading [dBuV] + Factor [dB]

Margin [dB] = Limit [dBuV] - Emission Level [dBuV]

Factor [dB] = LISN Factor [dB] + Cable Loss [dB] + Attenuator [dB]

< Sample Calculations >

Sample @0.1820 MHz (RX mode(0.1000MHz))

Emission Level = 39.4 [dBuV] + 10.0 [dB] = 49.4 [dBuV]

Result of Conducted disturbance at mains terminals


9.1.1.1 RX mode (0.1000MHz)

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Voltages on Mains Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(0.1000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 27 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 20.0 [degC]
HUMIDITY : 63.0 [%]
NOTE : -

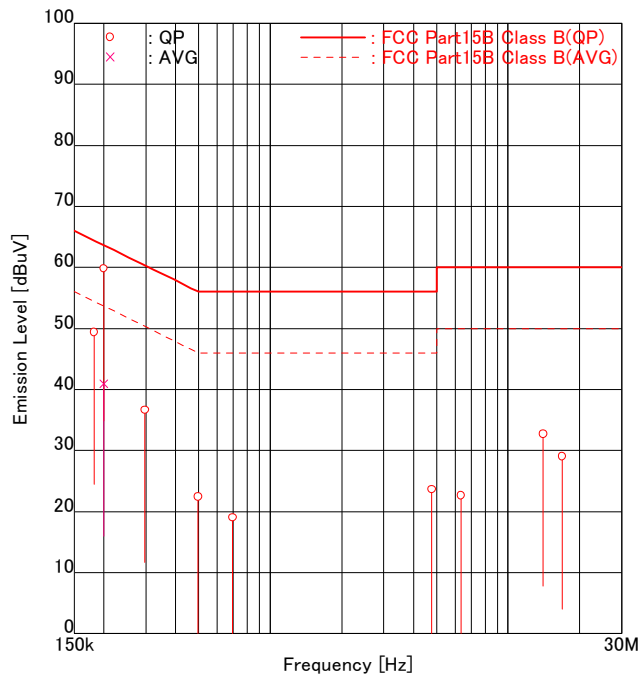

ENGINEER : Naohei Murakami

FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
			Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	0.1820	QP	<u>39.4</u>	39.4	10.0	9.9	<u>49.4</u>	49.3	64.4	<u>15.0</u>	15.1
2	0.1999	QP	<u>49.8</u>	49.7	10.0	9.9	<u>59.8</u>	59.6	63.6	<u>3.8</u>	4.0
3	0.1999	AVG	30.6	<u>31.0</u>	10.0	9.9	40.6	<u>40.9</u>	53.6	13.0	<u>12.7</u>
4	0.2975	QP	23.6	<u>26.7</u>	10.0	9.9	33.6	<u>36.6</u>	60.3	26.7	<u>23.7</u>
5	0.4978	QP	8.5	12.4	10.1	10.0	18.6	22.4	56.0	37.4	33.6
6	0.6954	QP	3.8	9.0	10.1	10.0	13.9	19.0	56.0	42.1	37.0
7	4.7801	QP	6.5	13.2	10.5	10.4	17.0	23.6	56.0	39.0	32.4
8	6.3361	QP	11.9	7.5	10.7	10.6	22.6	18.1	60.0	37.4	41.9
9	14.0501	QP	<u>21.4</u>	21.1	11.3	11.2	<u>32.7</u>	32.3	60.0	<u>27.3</u>	27.7
10	16.9077	QP	<u>17.6</u>	17.4	11.4	11.4	<u>29.0</u>	28.8	60.0	<u>31.0</u>	31.2

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(LISN,Pad,Cable)


9.1.1.2 RX mode (30.0000MHz)

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Voltages on Mains Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(30.0000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 27 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 20.0 [degC]
HUMIDITY : 63.0 [%]
NOTE : -

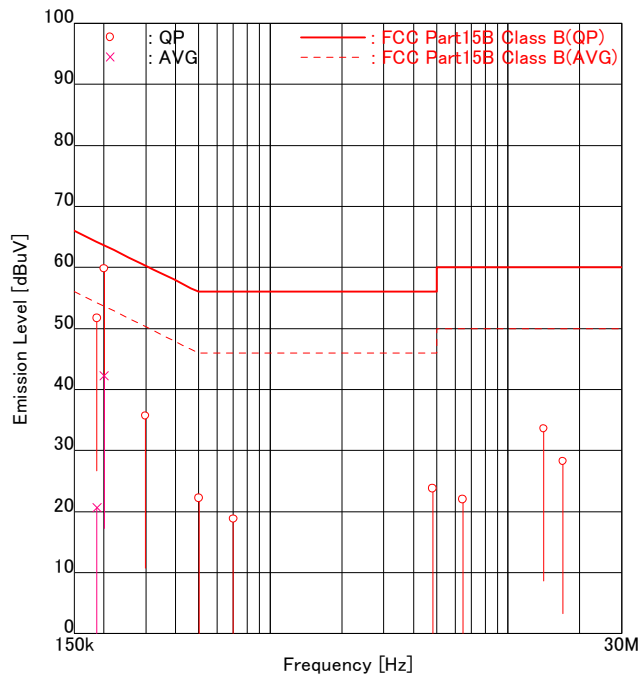

ENGINEER : Naohei Murakami

FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
			Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	0.1870	QP	<u>41.7</u>	41.7	10.0	9.9	<u>51.7</u>	51.6	64.2	<u>12.5</u>	12.6
2	0.1870	AVG	9.5	10.7	10.0	9.9	19.5	20.6	54.2	34.7	33.6
3	0.2005	QP	<u>49.8</u>	49.6	10.0	9.9	<u>59.8</u>	59.5	63.6	<u>3.8</u>	4.1
4	0.2005	AVG	31.8	<u>32.3</u>	10.0	9.9	41.8	<u>42.2</u>	53.6	11.8	<u>11.4</u>
5	0.2984	QP	21.7	<u>25.8</u>	10.0	9.9	31.7	<u>35.7</u>	60.3	28.6	<u>24.6</u>
6	0.5019	QP	8.5	12.2	10.1	10.0	18.6	22.2	56.0	37.4	33.8
7	0.6999	QP	3.9	8.8	10.1	10.0	14.0	18.8	56.0	42.0	37.2
8	4.8169	QP	5.5	13.4	10.5	10.4	16.0	23.8	56.0	40.0	32.2
9	6.4403	QP	11.3	7.8	10.7	10.6	22.0	18.4	60.0	38.0	41.6
10	14.0774	QP	<u>22.3</u>	21.8	11.3	11.2	<u>33.6</u>	33.0	60.0	<u>26.4</u>	27.0
11	16.9961	QP	<u>16.8</u>	16.5	11.4	11.4	<u>28.2</u>	27.9	60.0	<u>31.8</u>	32.1

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(LISN,Pad,Cable)


9.1.1.3 RX mode (59.9999MHz)

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Voltages on Mains Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(59.9999MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 27 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 20.0 [degC]
HUMIDITY : 63.0 [%]
NOTE : -

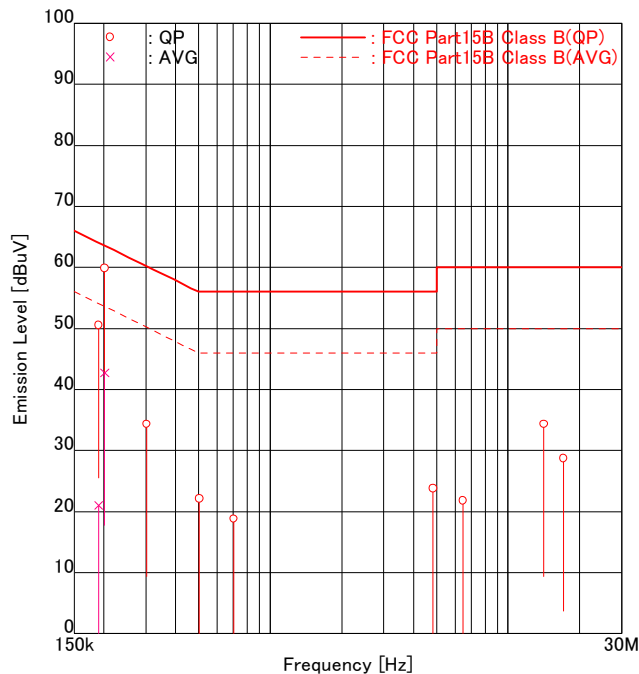

ENGINEER : Naohei Murakami

FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
			Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	0.1897	QP	<u>40.5</u>	40.4	10.0	9.9	<u>50.5</u>	50.3	64.0	<u>13.5</u>	13.7
2	0.1897	AVG	11.0	10.5	10.0	9.9	21.0	20.4	54.0	33.0	33.6
3	0.2014	QP	<u>49.9</u>	49.7	10.0	9.9	<u>59.9</u>	59.6	63.6	<u>3.7</u>	4.0
4	0.2014	AVG	32.4	<u>32.8</u>	10.0	9.9	42.4	<u>42.7</u>	53.6	11.2	<u>10.9</u>
5	0.3028	QP	18.3	<u>24.4</u>	10.1	9.9	28.4	<u>34.3</u>	60.2	31.8	<u>25.9</u>
6	0.5041	QP	8.4	12.1	10.1	10.0	18.5	22.1	56.0	37.5	33.9
7	0.7031	QP	3.7	8.8	10.1	10.0	13.8	18.8	56.0	42.2	37.2
8	4.8343	QP	5.5	13.4	10.5	10.4	16.0	23.8	56.0	40.0	32.2
9	6.4586	QP	11.1	8.0	10.7	10.6	21.8	18.6	60.0	38.2	41.4
10	14.1352	QP	<u>23.0</u>	22.5	11.3	11.2	<u>34.3</u>	33.7	60.0	<u>25.7</u>	26.3
11	17.0812	QP	<u>17.3</u>	17.2	11.4	11.4	<u>28.7</u>	28.6	60.0	<u>31.3</u>	31.4

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(LISN,Pad,Cable)

9.1.2 Radiated disturbance

Location	Matsuda No.1 Test Site and No.2 Test Site
Test Engineer	Yoshiaki Yoneyama

Frequency Range of Measurements

Operating mode	Required Frequency Range	Measured Frequency Range
RX mode(0.1000MHz) RX mode(30.0000MHz) RX mode(59.9999MHz) RX mode(VFO SCAN)	30 – 19000 MHz	30 – 19000 MHz

Test Procedure

Item	Document number
Radiated disturbance	LEN-RJP-EM003

Setting for the Measuring instruments

Frequency [MHz]	Instrument	Detector	Resolution Bandwidth	Video Bandwidth
30 – 1000	Receiver	Quasi Peak	120 kHz	N/A
Above 1000	Receiver	Peak	1 MHz	N/A
		Average	1 MHz	N/A

< Measurement data correction >

Emission Level [dBuV] = Meter Reading [dBuV] + Factor [dB/m]

Margin [dB] = Limit [dBuV/m] - Emission Level [dBuV/m]

Factor [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] - Amplifier Gain [dB] + Attenuator [dB]
 (+ Distance Conversion Factor [dB])*

* For other than Standard distance:

Distance Conversion Factor = 20 log (Measurement distance / Standard distance)

< Sample Calculations >


Sample @34.85 MHz (RX mode(0.1000MHz))

Emission Level = 40.5 [dBuV] – 8.1 [dB/m] = 32.4 [dBuV/m]

Specification of Radiated disturbance

Operating Condition	Frequency Range	Measurement distance	Antenna height
RX mode(0.1000MHz) RX mode(30.0000MHz) RX mode(59.9999MHz) RX mode(VFO SCAN)	30-1000 MHz	3 m	Scanned 1 to 4 m
	Above 1 GHz	3.43 m	Scanned 1 to 4 m

Absorber placement and Receive Antenna location in Radiated disturbance above 1 GHz

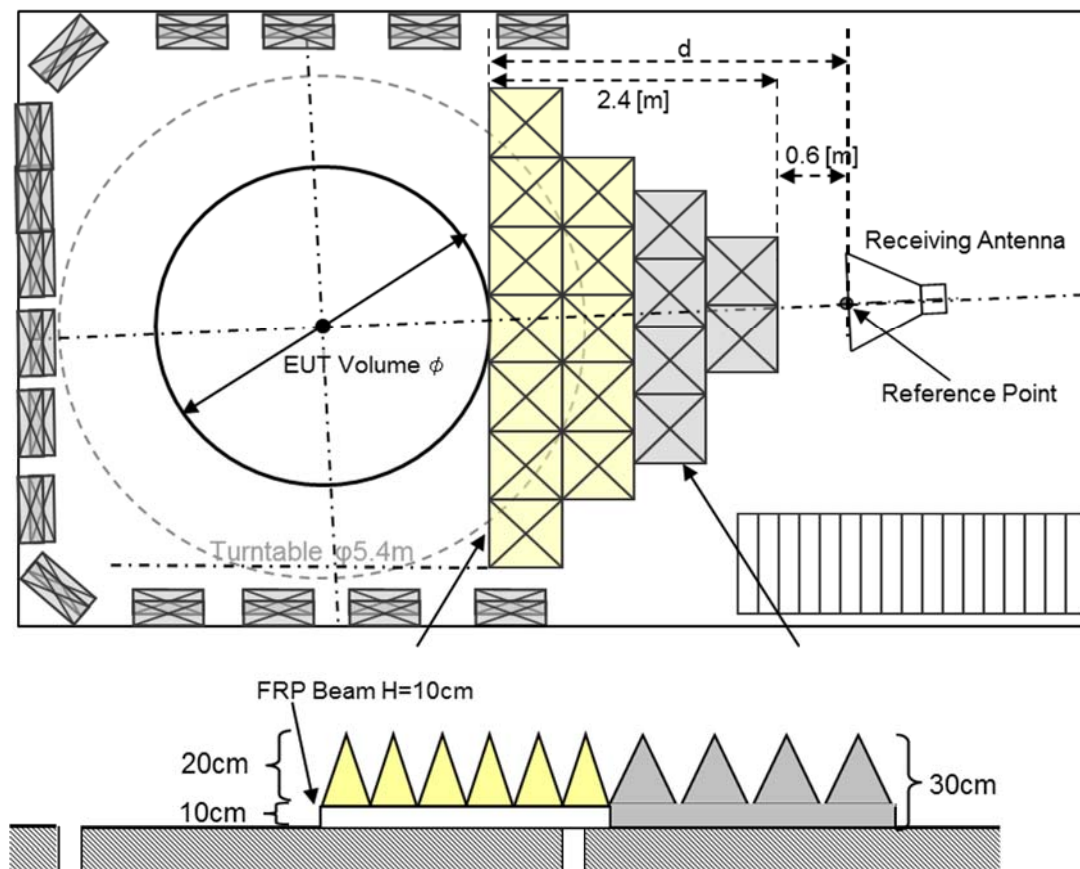

Result of Radiated disturbances


9.1.2.1 RX mode(0.1000MHz) 30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Radiated Electric Field

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(0.1000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : Jun 01 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
DISTANCE : 3.00 [m]
TEMPERATURE : 24.5 [degC]
HUMIDITY : 43.0 [%]
NOTE : -

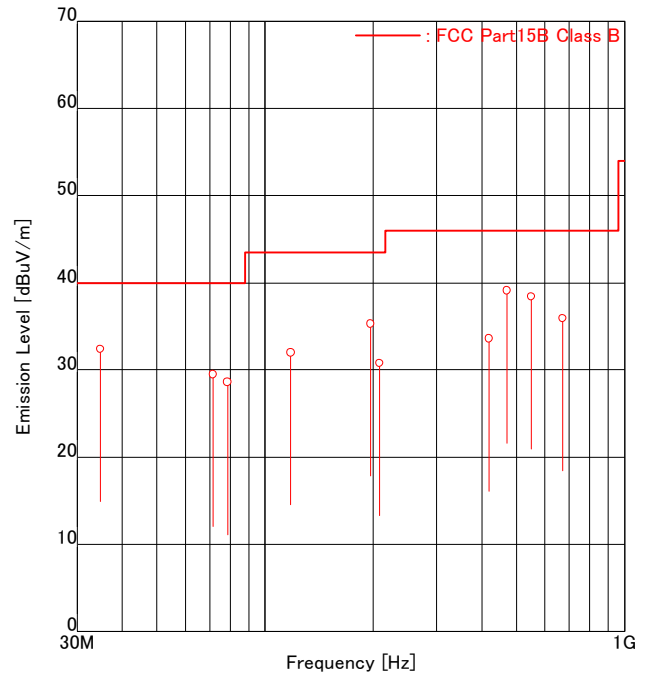

ENGINEER : Yoshiaki Yoneyama

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
		Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	34.85	-	<u>40.5</u>	-8.1	-8.1	-	<u>32.4</u>	40.0	-	<u>7.6</u>
2	71.55	<u>37.1</u>	-	-7.6	-7.6	<u>29.5</u>	-	40.0	<u>10.5</u>	-
3	78.55	38.0	37.5	-9.4	-9.4	28.6	28.1	40.0	11.4	11.9
4	117.82	39.7	36.8	-7.7	-7.7	32.0	29.1	43.5	11.5	14.4
5	196.36	<u>42.3</u>	33.2	-7.0	-7.0	<u>35.3</u>	26.2	43.5	<u>8.2</u>	17.3
6	208.10	37.5	-	-6.7	-6.7	30.8	-	43.5	12.7	-
7	419.80	32.4	-	1.2	1.2	33.6	-	46.0	12.4	-
8	471.27	<u>36.8</u>	32.0	2.3	2.3	<u>39.1</u>	34.3	46.0	<u>6.9</u>	11.7
9	549.82	<u>34.2</u>	32.9	4.2	4.2	<u>38.4</u>	37.1	46.0	<u>7.6</u>	8.9
10	672.00	27.3	<u>29.2</u>	6.7	6.7	34.0	<u>35.9</u>	46.0	12.0	<u>10.1</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.

Above 1000 MHz

Intertek Japan K.K.
Matsuda No.1 Test Site
Radiated Electric Field

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(0.1000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : Jun 02 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
DISTANCE : 3.43 [m]
TEMPERATURE : 23.0 [degC]
HUMIDITY : 56.0 [%]
NOTE : -

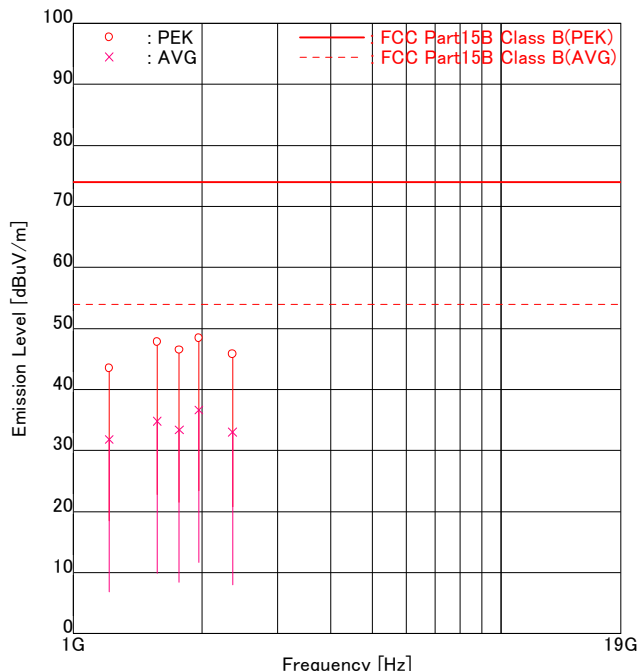

ENGINEER : Yoshiaki Yoneyama


FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB]		EMISSION [dBuV/m]		LIMIT [dBuV/m]		MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert
1	1213.48	PEK	42.0	43.5	-0.0	-0.0	42.0	43.5	74.0	32.0	30.5	
2	1213.48	AVG	29.0	<u>31.8</u>	-0.0	-0.0	29.0	<u>31.8</u>	54.0	25.0	<u>22.2</u>	
3	1570.95	PEK	43.3	46.1	1.7	1.7	45.0	47.8	74.0	29.0	26.2	
4	1570.95	AVG	31.5	<u>33.1</u>	1.7	1.7	33.2	<u>34.8</u>	54.0	20.8	<u>19.2</u>	
5	1767.21	PEK	43.7	43.2	2.8	2.8	46.5	46.0	74.0	27.5	28.0	
6	1767.21	AVG	<u>30.6</u>	30.4	2.8	2.8	<u>33.4</u>	33.2	54.0	<u>20.6</u>	20.8	
7	1963.61	PEK	<u>44.5</u>	43.7	3.9	3.9	<u>48.4</u>	47.6	74.0	<u>25.6</u>	26.4	
8	1963.61	AVG	<u>32.7</u>	31.1	3.9	3.9	<u>36.6</u>	35.0	54.0	<u>17.4</u>	19.0	
9	2356.33	PEK	41.0	40.7	4.8	4.8	45.8	45.5	74.0	28.2	28.5	
10	2356.33	AVG	<u>28.2</u>	28.0	4.8	4.8	<u>33.0</u>	32.8	54.0	<u>21.0</u>	21.2	

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level=Read+Fact.
Fact.=Ant. Fact.+Cable Loss-Amp. Gain+ATT+Dist.Conversion

9.1.2.2 RX mode(30.0000MHz)
30 – 1000 MHz

Intertek Japan K.K.
Matsuda No.2 Test Site
Radiated Electric Field

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(30.0000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : Jun 01 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
DISTANCE : 3.00 [m]
TEMPERATURE : 24.5 [degC]
HUMIDITY : 43.0 [%]
NOTE : -

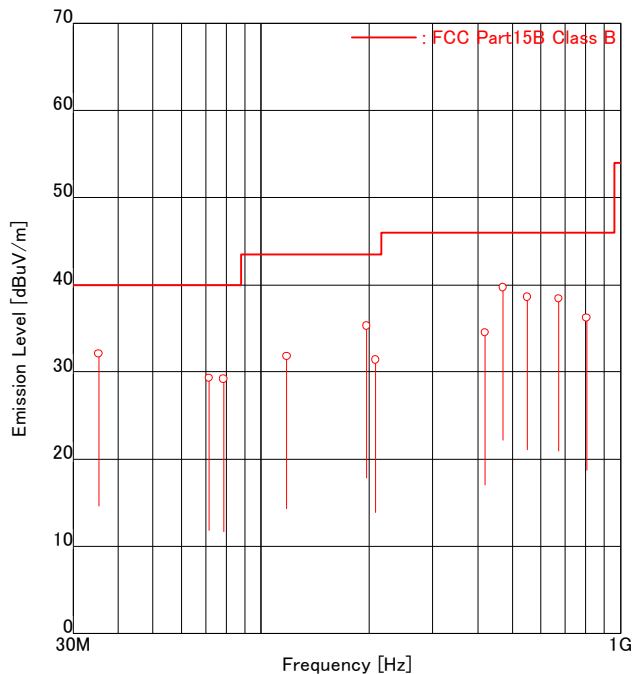

ENGINEER : Yoshiaki Yoneyama

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
		Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	35.34	-	<u>40.0</u>	-7.9	-7.9	-	<u>32.1</u>	40.0	-	<u>7.9</u>
2	71.55	36.9	34.5	-7.6	-7.6	29.3	26.9	40.0	10.7	13.1
3	78.55	38.6	38.0	-9.4	-9.4	29.2	28.6	40.0	10.8	11.4
4	117.82	39.5	-	-7.7	-7.7	31.8	-	43.5	11.7	-
5	196.36	<u>42.3</u>	-	-7.0	-7.0	<u>35.3</u>	-	43.5	<u>8.2</u>	-
6	207.85	38.1	-	-6.7	-6.7	31.4	-	43.5	12.1	-
7	419.80	33.3	-	1.2	1.2	34.5	-	46.0	11.5	-
8	471.27	<u>37.4</u>	33.3	2.3	2.3	<u>39.7</u>	35.6	46.0	<u>6.3</u>	10.4
9	549.82	<u>34.4</u>	33.2	4.2	4.2	<u>38.6</u>	37.4	46.0	<u>7.4</u>	8.6
10	672.00	29.2	<u>31.7</u>	6.7	6.7	35.9	<u>38.4</u>	46.0	10.1	<u>7.6</u>
11	803.21	25.3	<u>26.7</u>	9.5	9.5	34.8	<u>36.2</u>	46.0	11.2	<u>9.8</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.

Above 1000 MHz

Intertek Japan K.K.
Matsuda No.1 Test Site
Radiated Electric Field

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(30.0000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : Jun 02 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
DISTANCE : 3.43 [m]
TEMPERATURE : 23.0 [degC]
HUMIDITY : 56.0 [%]
NOTE : -

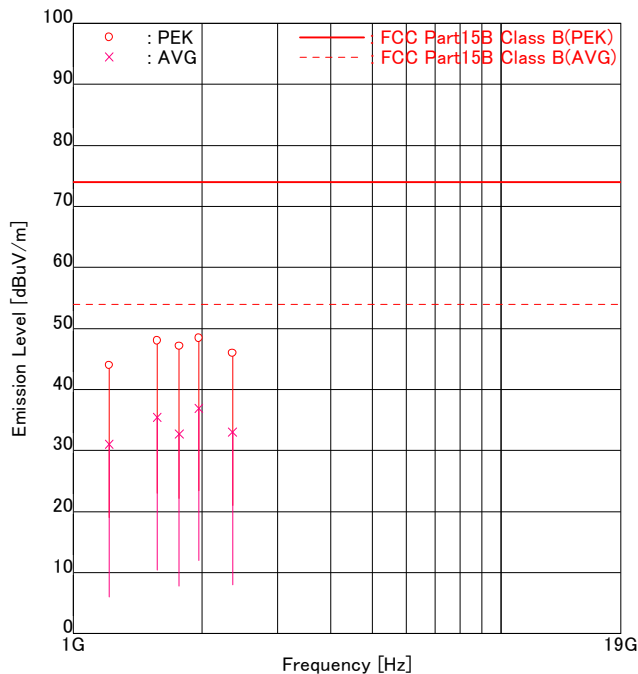

ENGINEER : Yoshiaki Yoneyama


FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB]		EMISSION [dBuV/m]		LIMIT [dBuV/m]		MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert
1	1213.48	PEK	43.0	44.0	-0.0	-0.0	43.0	44.0	74.0		31.0	30.0
2	1213.48	AVG	29.0	<u>31.0</u>	-0.0	-0.0	29.0	<u>31.0</u>	54.0		25.0	<u>23.0</u>
3	1570.95	PEK	43.9	46.3	1.7	1.7	45.6	48.0	74.0		28.4	26.0
4	1570.95	AVG	31.8	<u>33.7</u>	1.7	1.7	33.5	<u>35.4</u>	54.0		20.5	<u>18.6</u>
5	1767.21	PEK	44.3	43.0	2.8	2.8	47.1	45.8	74.0		26.9	28.2
6	1767.21	AVG	28.3	<u>29.9</u>	2.8	2.8	31.1	<u>32.7</u>	54.0		22.9	<u>21.3</u>
7	1963.61	PEK	<u>44.5</u>	44.2	3.9	3.9	<u>48.4</u>	48.1	74.0		<u>25.6</u>	25.9
8	1963.61	AVG	<u>33.0</u>	31.0	3.9	3.9	<u>36.9</u>	34.9	54.0		<u>17.1</u>	19.1
9	2356.33	PEK	41.2	41.0	4.8	4.8	46.0	45.8	74.0		28.0	28.2
10	2356.33	AVG	<u>28.2</u>	27.9	4.8	4.8	<u>33.0</u>	32.7	54.0		<u>21.0</u>	21.3

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level=Read+Fact.
Fact.=Ant. Fact.+Cable Loss-Amp. Gain+ATT+Dist.Conversion

**9.1.2.3 RX mode(59.9999MHz)
30 – 1000 MHz**

**Intertek Japan K.K.
Matsuda No.2 Test Site
Radiated Electric Field**

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(59.9999MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : Jun 01 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
DISTANCE : 3.00 [m]
TEMPERATURE : 24.5 [degC]
HUMIDITY : 43.0 [%]
NOTE : -

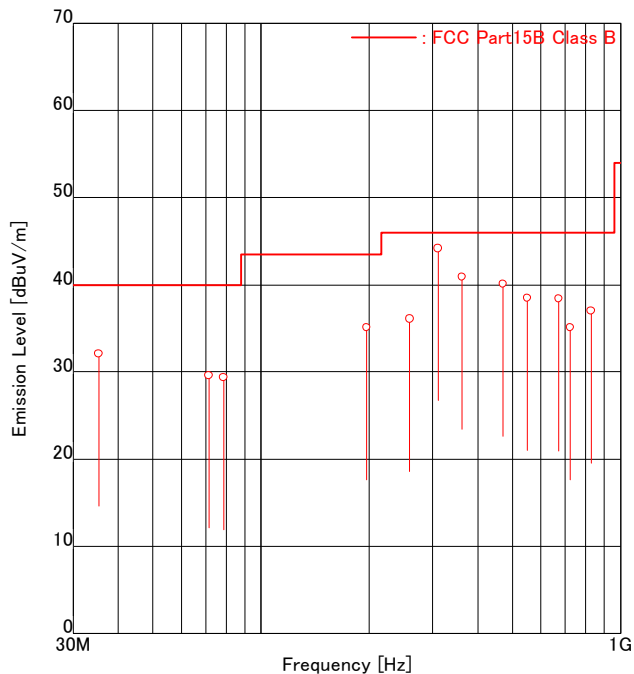

ENGINEER : Yoshiaki Yoneyama


FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]		MARGIN [dB]	
		Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert
1	35.34	-	<u>40.0</u>	-7.9	-7.9	-	<u>32.1</u>	40.0	-	-	<u>7.9</u>
2	71.50	37.2	34.5	-7.6	-7.6	29.6	26.9	40.0	10.4	13.1	
3	78.55	38.8	38.0	-9.4	-9.4	29.4	28.6	40.0	10.6	11.4	
4	196.36	42.1	-	-7.0	-7.0	35.1	-	43.5	8.4	-	
5	258.76	40.0	-	-3.9	-3.9	36.1	-	46.0	9.9	-	
6	310.51	<u>45.8</u>	37.5	-1.6	-1.6	<u>44.2</u>	35.9	46.0	<u>1.8</u>	10.1	
7	362.26	<u>41.2</u>	34.3	-0.3	-0.3	<u>40.9</u>	34.0	46.0	<u>5.1</u>	12.0	
8	471.27	<u>37.8</u>	33.3	2.3	2.3	<u>40.1</u>	35.6	46.0	<u>5.9</u>	10.4	
9	549.82	<u>34.3</u>	33.2	4.2	4.2	<u>38.5</u>	37.4	46.0	<u>7.5</u>	8.6	
10	672.00	27.8	<u>31.7</u>	6.7	6.7	34.5	<u>38.4</u>	46.0	11.5	<u>7.6</u>	
11	724.53	26.8	27.2	7.9	7.9	34.7	35.1	46.0	11.3	10.9	
12	828.03	27.2	26.0	9.8	9.8	37.0	35.8	46.0	9.0	10.2	

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)

Above 1000 MHz

Intertek Japan K.K.
Matsuda No.1 Test Site
Radiated Electric Field

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(59.9999MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : Jun 02 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
DISTANCE : 3.43 [m]
TEMPERATURE : 23.0 [degC]
HUMIDITY : 56.0 [%]
NOTE : -

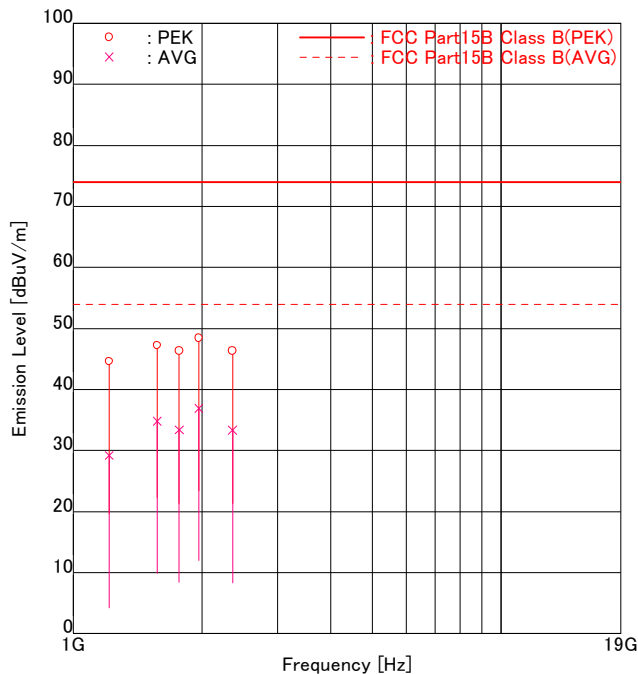

ENGINEER : Yoshiaki Yoneyama


FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB]		EMISSION [dBuV/m]		LIMIT [dBuV/m]		MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert
1	1213.48	PEK	44.6	42.8	-0.0	-0.0	44.6	42.8	74.0	29.4	31.2	
2	1213.48	AVG	<u>29.2</u>	28.9	-0.0	-0.0	<u>29.2</u>	28.9	54.0	<u>24.8</u>	25.1	
3	1570.95	PEK	44.5	45.5	1.7	1.7	46.2	47.2	74.0	27.8	26.8	
4	1570.95	AVG	32.3	<u>33.1</u>	1.7	1.7	34.0	<u>34.8</u>	54.0	20.0	<u>19.2</u>	
5	1767.21	PEK	43.3	43.5	2.8	2.8	46.1	46.3	74.0	27.9	27.7	
6	1767.21	AVG	<u>30.6</u>	29.8	2.8	2.8	<u>33.4</u>	32.6	54.0	<u>20.6</u>	21.4	
7	1963.61	PEK	<u>44.5</u>	42.9	3.9	3.9	<u>48.4</u>	46.8	74.0	<u>25.6</u>	27.2	
8	1963.61	AVG	<u>33.0</u>	29.7	3.9	3.9	<u>36.9</u>	33.6	54.0	<u>17.1</u>	20.4	
9	2356.33	PEK	41.5	41.2	4.8	4.8	46.3	46.0	74.0	27.7	28.0	
10	2356.33	AVG	<u>28.5</u>	28.1	4.8	4.8	<u>33.3</u>	32.9	54.0	<u>20.7</u>	21.1	

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level=Read+Fact.
Fact.=Ant. Fact.+Cable Loss-Amp. Gain+ATT+Dist.Conversion

**9.1.2.4 RX mode(VFO SCAN)
30 – 1000 MHz**

**Intertek Japan K.K.
Matsuda No.2 Test Site
Radiated Electric Field**

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(VFO SCAN)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : Jun 01 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
DISTANCE : 3.00 [m]
TEMPERATURE : 24.5 [degC]
HUMIDITY : 43.0 [%]
NOTE : -

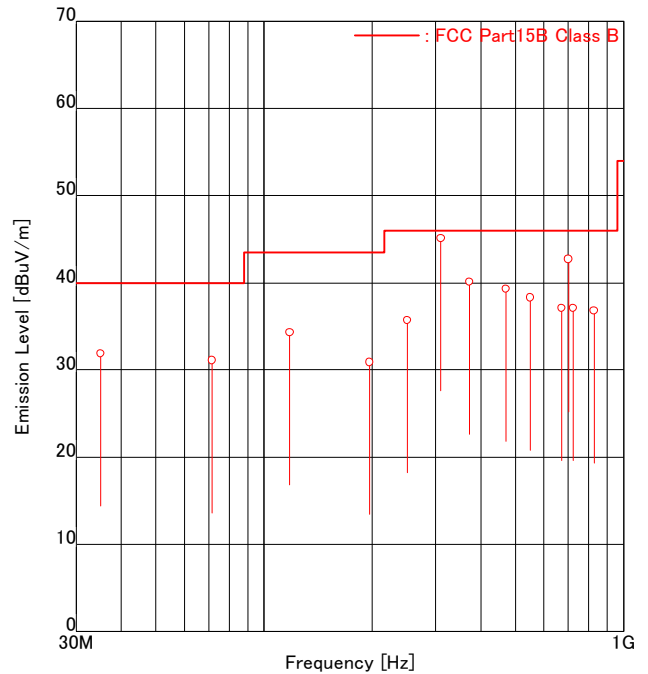

ENGINEER : Yoshiaki Yoneyama

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
		Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	35.11	-	<u>39.9</u>	-8.0	-8.0	-	<u>31.9</u>	40.0	-	<u>8.1</u>
2	71.54	38.7	-	-7.6	-7.6	31.1	-	40.0	8.9	-
3	117.82	42.0	-	-7.7	-7.7	34.3	-	43.5	9.2	-
4	196.36	37.9	37.0	-7.0	-7.0	30.9	30.0	43.5	12.6	13.5
5	249.96	40.0	36.5	-4.3	-4.3	35.7	32.2	46.0	10.3	13.8
6	310.16	<u>46.7</u>	43.9	-1.6	-1.6	<u>45.1</u>	42.3	46.0	<u>0.9</u>	3.7
7	372.52	<u>40.2</u>	37.8	-0.1	-0.1	<u>40.1</u>	37.7	46.0	<u>5.9</u>	8.3
8	471.27	<u>37.0</u>	36.2	2.3	2.3	<u>39.3</u>	38.5	46.0	<u>6.7</u>	7.5
9	549.82	<u>34.1</u>	31.5	4.2	4.2	<u>38.3</u>	35.7	46.0	<u>7.7</u>	10.3
10	672.00	29.8	30.4	6.7	6.7	36.5	37.1	46.0	9.5	8.9
11	702.87	30.8	<u>35.2</u>	7.5	7.5	38.3	<u>42.7</u>	46.0	7.7	<u>3.3</u>
12	724.53	29.2	<u>27.7</u>	7.9	7.9	37.1	<u>35.6</u>	46.0	8.9	10.4
13	828.03	27.0	26.0	9.8	9.8	36.8	35.8	46.0	9.2	10.2

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.

Above 1000 MHz

Intertek Japan K.K.
Matsuda No.1 Test Site
Radiated Electric Field

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(VFO SCAN)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : Jun 02 2021
FILE NO. : -
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2014
DISTANCE : 3.43 [m]
TEMPERATURE : 23.0 [degC]
HUMIDITY : 56.0 [%]
NOTE : -

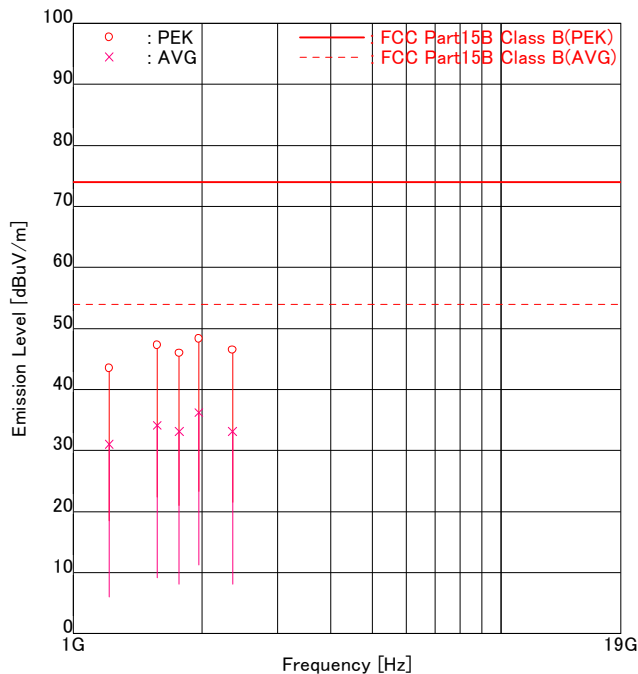

ENGINEER : Yoshiaki Yoneyama

FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB]		EMISSION [dBuV/m]		LIMIT [dBuV/m]		MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert	Hori	Vert
1	1213.48	PEK	43.3	43.5	-0.0	-0.0	43.3	43.5	74.0	30.7	30.5	
2	1213.48	AVG	28.9	<u>31.0</u>	-0.0	-0.0	28.9	<u>31.0</u>	54.0	25.1	<u>23.0</u>	
3	1570.95	PEK	43.7	45.6	1.7	1.7	45.4	47.3	74.0	28.6	26.7	
4	1570.95	AVG	31.4	<u>32.4</u>	1.7	1.7	33.1	<u>34.1</u>	54.0	20.9	<u>19.9</u>	
5	1767.21	PEK	43.2	42.6	2.8	2.8	46.0	45.4	74.0	28.0	28.6	
6	1767.21	AVG	<u>30.3</u>	29.7	2.8	2.8	<u>33.1</u>	32.5	54.0	<u>20.9</u>	21.5	
7	1963.61	PEK	<u>44.4</u>	42.7	3.9	3.9	<u>48.3</u>	46.6	74.0	<u>25.7</u>	27.4	
8	1963.61	AVG	<u>32.3</u>	29.7	3.9	3.9	<u>36.2</u>	33.6	54.0	<u>17.8</u>	20.4	
9	2356.33	PEK	40.7	41.7	4.8	4.8	45.5	46.5	74.0	28.5	27.5	
10	2356.33	AVG	<u>28.3</u>	27.8	4.8	4.8	<u>33.1</u>	32.6	54.0	<u>20.9</u>	21.4	

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level=Read+Fact.
Fact.=Ant. Fact.+Cable Loss-Amp. Gain+ATT+Dist.Conversion

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.

9.1.3 Conducted power on antenna port

Location	Kashima No.12 Test Site
Test Engineer	Koichi Wagatsuma

Frequency Range of Measurements

Operating mode	Required Frequency Range	Measured Frequency Range
RX mode(0.1000MHz)ANT1 RX mode(30.0000MHz)ANT1 RX mode(59.9999MHz)ANT1 RX mode(VFO SCAN)ANT1 RX mode(0.1000MHz)ANT2 RX mode(30.0000MHz)ANT2 RX mode(59.9999MHz)ANT2 RX mode(VFO SCAN)ANT2 RX mode(0.1000MHz)ANTRX RX mode(30.0000MHz)ANTRX RX mode(59.9999MHz)ANTRX RX mode(VFO SCAN)ANTRX	30 – 19000 MHz	30 – 19000 MHz

Test Procedure

Item	Document number
Conducted power on antenna port	LEN-RJP-TE101

Setting for the Measuring instruments

Frequency [MHz]	Instrument	Detector	Resolution Bandwidth	Video Bandwidth
30 – 1000	Receiver	Quasi Peak	120 kHz	N/A
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz

< Measurement data correction >

Emission Level = Meter Reading + Factor

Margin = Limit - Emission Level

Factor = Pad + Cable Loss – Amplifier Gain

< Sample Calculations >

Sample @58.4324 MHz (RX mode(0.1000MHz)ANT1)

Emission Level = 36.9 [dBuV] – 21.5 [dB] = 15.4 [dBuV]


Result of Conducted power on antenna port
9.1.3.1 RX mode(0.1000MHz) ANT1
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(0.1000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 27 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 22.1 [degC]
HUMIDITY : 63.0 [%]
NOTE : ANT1

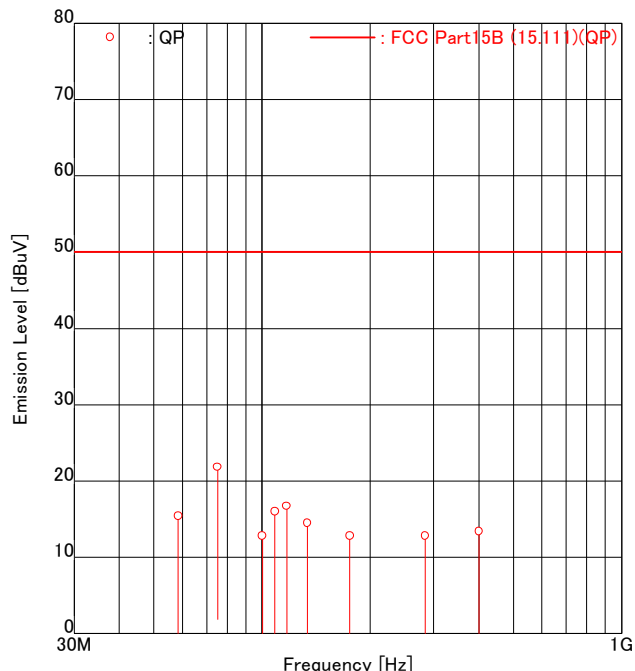

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	58.4324	<u>36.9</u>	-21.5	<u>15.4</u>	50.0	<u>34.6</u>
2	75.1326	<u>43.2</u>	-21.4	<u>21.8</u>	50.0	<u>28.2</u>
3	100.1760	<u>34.0</u>	-21.2	<u>12.8</u>	50.0	<u>37.2</u>
4	108.5230	<u>37.2</u>	-21.2	<u>16.0</u>	50.0	<u>34.0</u>
5	116.8726	<u>37.9</u>	-21.2	<u>16.7</u>	50.0	<u>33.3</u>
6	133.5660	<u>35.6</u>	-21.1	<u>14.5</u>	50.0	<u>35.5</u>
7	175.3080	<u>33.8</u>	-21.0	<u>12.8</u>	50.0	<u>37.2</u>
8	283.8326	<u>33.6</u>	-20.8	<u>12.8</u>	50.0	<u>37.2</u>
9	400.7046	<u>33.9</u>	-20.5	<u>13.4</u>	50.0	<u>36.6</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(0.1000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 28 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANT1

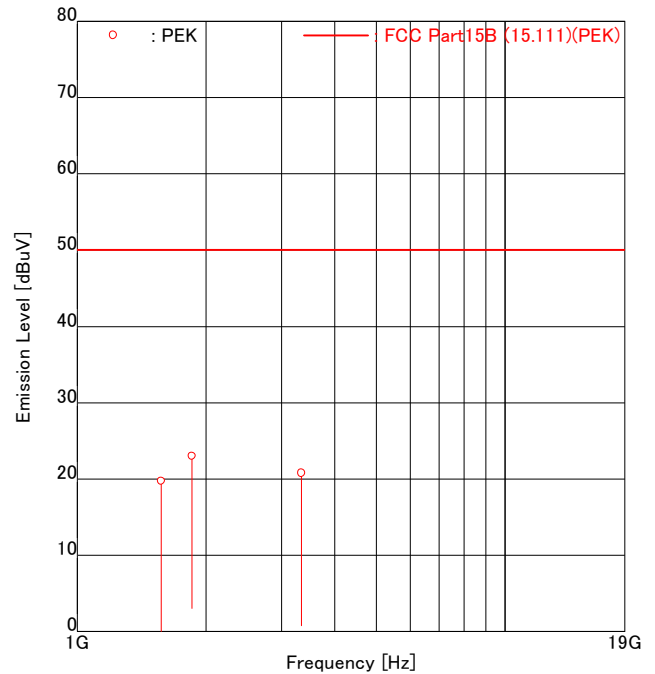

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1570.5000	<u>42.1</u>	-22.4	<u>19.7</u>	50.0	<u>30.3</u>
2	1853.4000	<u>44.6</u>	-21.6	<u>23.0</u>	50.0	<u>27.0</u>
3	3339.2000	<u>40.1</u>	-19.3	<u>20.8</u>	50.0	<u>29.2</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad,Cable,Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)


9.1.3.2 RX mode(30.0000MHz) ANT1
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(30.0000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 27 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 22.1 [degC]
HUMIDITY : 63.0 [%]
NOTE : ANT1

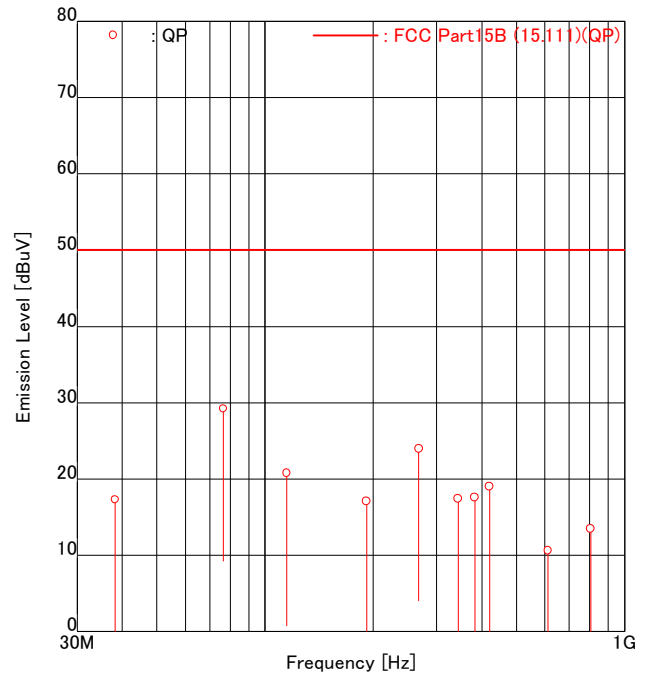

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	38.2492	39.1	-21.8	17.3	50.0	32.7
2	76.4961	<u>50.6</u>	-21.4	<u>29.2</u>	50.0	<u>20.8</u>
3	114.7438	<u>42.0</u>	-21.2	<u>20.8</u>	50.0	<u>29.2</u>
4	191.2408	38.0	-20.9	17.1	50.0	32.9
5	267.7378	<u>44.7</u>	-20.7	<u>24.0</u>	50.0	<u>26.0</u>
6	344.2310	<u>38.1</u>	-20.7	<u>17.4</u>	50.0	<u>32.6</u>
7	382.4794	<u>38.1</u>	-20.5	<u>17.6</u>	50.0	<u>32.4</u>
8	420.7280	<u>39.4</u>	-20.4	<u>19.0</u>	50.0	<u>31.0</u>
9	611.9664	30.4	-19.8	10.6	50.0	39.4
10	803.2090	32.7	-19.2	13.5	50.0	36.5

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(30.0000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANT1

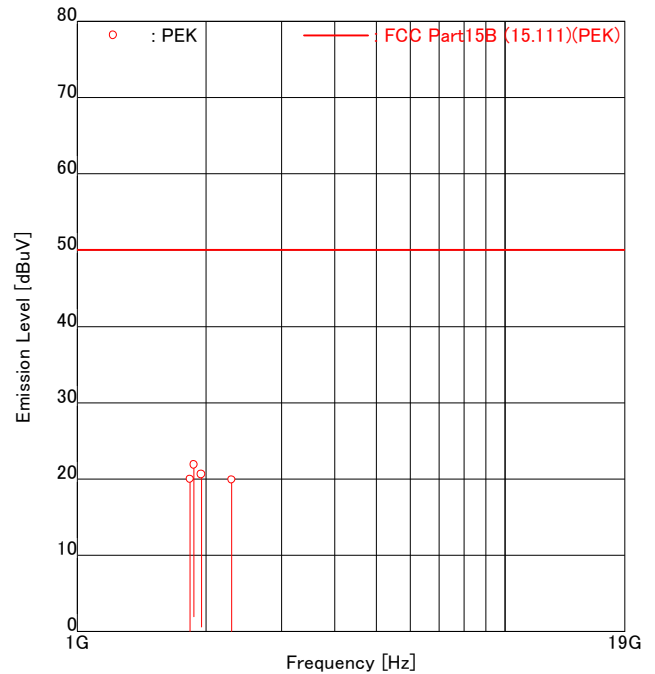

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1835.9000	<u>41.7</u>	-21.7	<u>20.0</u>	50.0	<u>30.0</u>
2	1874.0600	<u>43.5</u>	-21.6	<u>21.9</u>	50.0	<u>28.1</u>
3	1950.6000	<u>41.9</u>	-21.3	<u>20.6</u>	50.0	<u>29.4</u>
4	2294.8800	<u>40.7</u>	-20.8	<u>19.9</u>	50.0	<u>30.1</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


9.1.3.3 RX mode(59.9999MHz) ANT1
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(59.9999MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 27 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 22.1 [degC]
HUMIDITY : 63.0 [%]
NOTE : ANT1

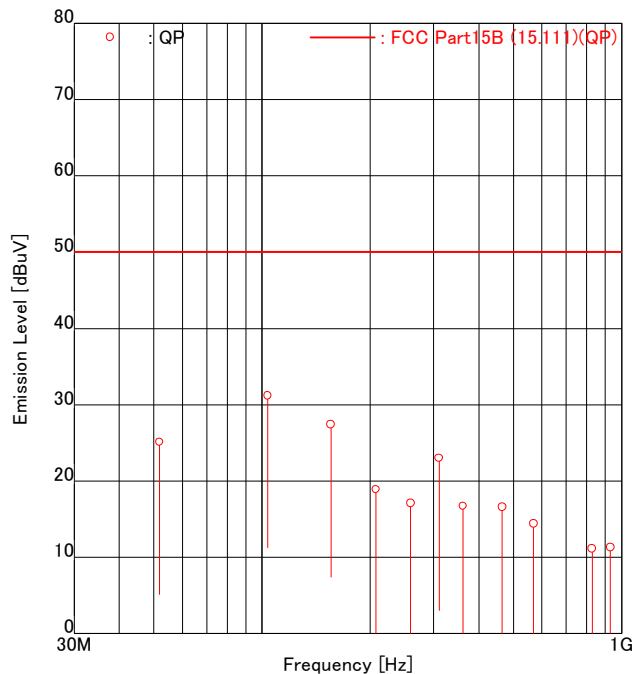

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	51.7506	<u>46.8</u>	-21.7	<u>25.1</u>	50.0	<u>24.9</u>
2	103.5048	<u>52.4</u>	-21.2	<u>31.2</u>	50.0	<u>18.8</u>
3	155.2546	<u>48.4</u>	-21.0	<u>27.4</u>	50.0	<u>22.6</u>
4	207.0076	<u>39.9</u>	-21.0	<u>18.9</u>	50.0	<u>31.1</u>
5	258.7572	<u>37.8</u>	-20.7	<u>17.1</u>	50.0	<u>32.9</u>
6	310.5106	<u>43.7</u>	-20.7	<u>23.0</u>	50.0	<u>27.0</u>
7	362.2642	37.3	-20.6	16.7	50.0	33.3
8	465.7694	36.9	-20.3	16.6	50.0	33.4
9	569.2756	34.3	-19.9	14.4	50.0	35.6
10	828.0362	30.3	-19.2	11.1	50.0	38.9
11	931.5354	30.5	-19.2	11.3	50.0	38.7

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(59.9999MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANT1

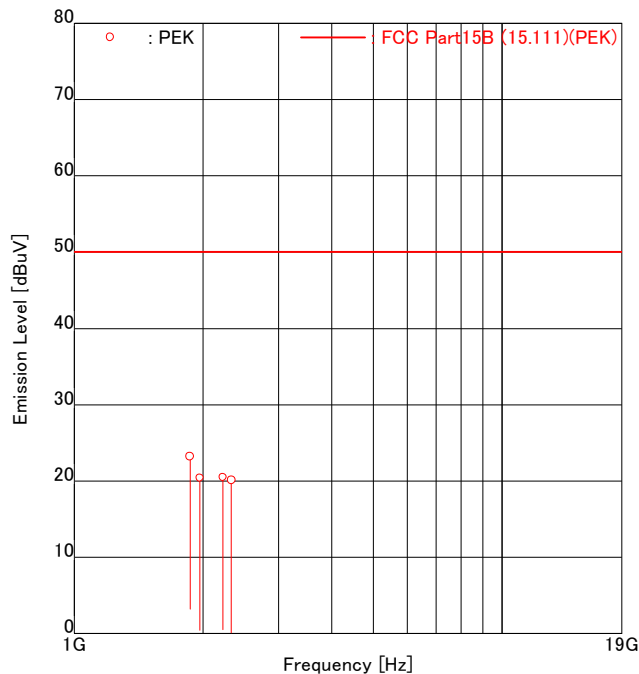

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1863.0000	<u>44.8</u>	-21.6	<u>23.2</u>	50.0	<u>26.8</u>
2	1966.5000	<u>41.7</u>	-21.3	<u>20.4</u>	50.0	<u>29.6</u>
3	2225.3000	<u>41.5</u>	-21.0	<u>20.5</u>	50.0	<u>29.5</u>
4	2328.9000	<u>40.8</u>	-20.7	<u>20.1</u>	50.0	<u>29.9</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad,Cable,Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


9.1.3.4 RX mode(VFO SCAN) ANT1
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(VFO SCAN)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 27 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 22.1 [degC]
HUMIDITY : 63.0 [%]
NOTE : ANT1

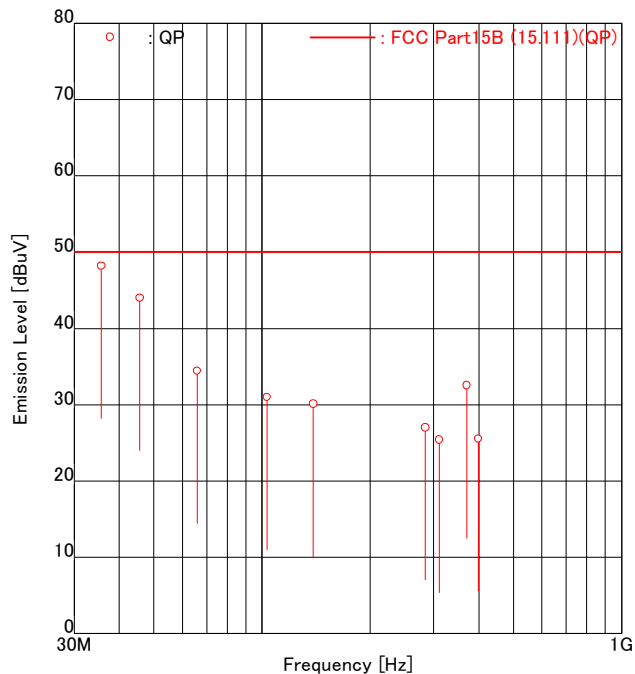

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	35.7486	<u>70.0</u>	-21.8	<u>48.2</u>	50.0	<u>1.8</u>
2	45.7230	<u>65.7</u>	-21.7	<u>44.0</u>	50.0	<u>6.0</u>
3	66.0614	<u>55.9</u>	-21.5	<u>34.4</u>	50.0	<u>15.6</u>
4	103.0980	<u>52.2</u>	-21.2	<u>31.0</u>	50.0	<u>19.0</u>
5	138.8016	<u>51.2</u>	-21.1	<u>30.1</u>	50.0	<u>19.9</u>
6	284.5450	47.8	-20.8	27.0	50.0	23.0
7	310.8976	46.1	-20.7	25.4	50.0	24.6
8	370.7284	<u>53.0</u>	-20.5	<u>32.5</u>	50.0	<u>17.5</u>
9	399.9422	46.0	-20.5	25.5	50.0	24.5

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port



APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(VFO SCAN)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANT1

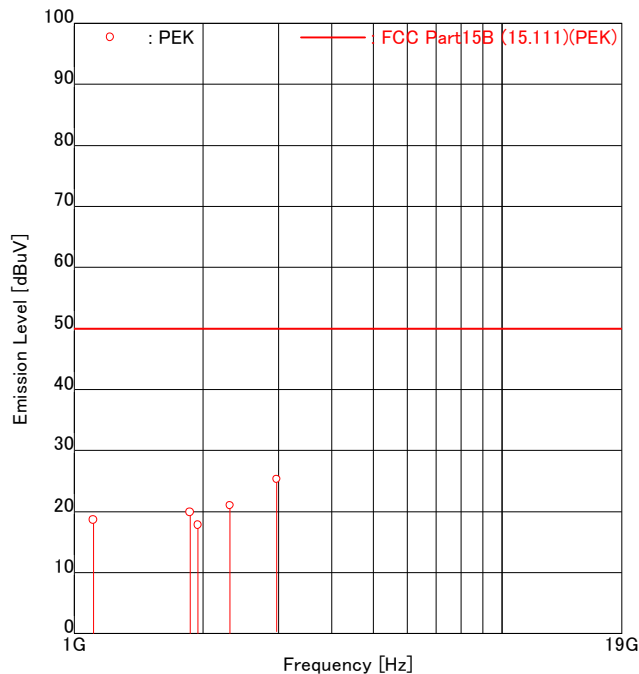

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1107.7500	<u>40.8</u>	-22.2	<u>18.6</u>	50.0	<u>31.4</u>
2	1863.3400	<u>41.5</u>	-21.6	<u>19.9</u>	50.0	<u>30.1</u>
3	1945.6200	<u>39.2</u>	-21.4	<u>17.8</u>	50.0	<u>32.2</u>
4	2307.7000	<u>41.8</u>	-20.8	<u>21.0</u>	50.0	<u>29.0</u>
5	2970.0000	<u>45.0</u>	-19.7	<u>25.3</u>	50.0	<u>24.7</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)

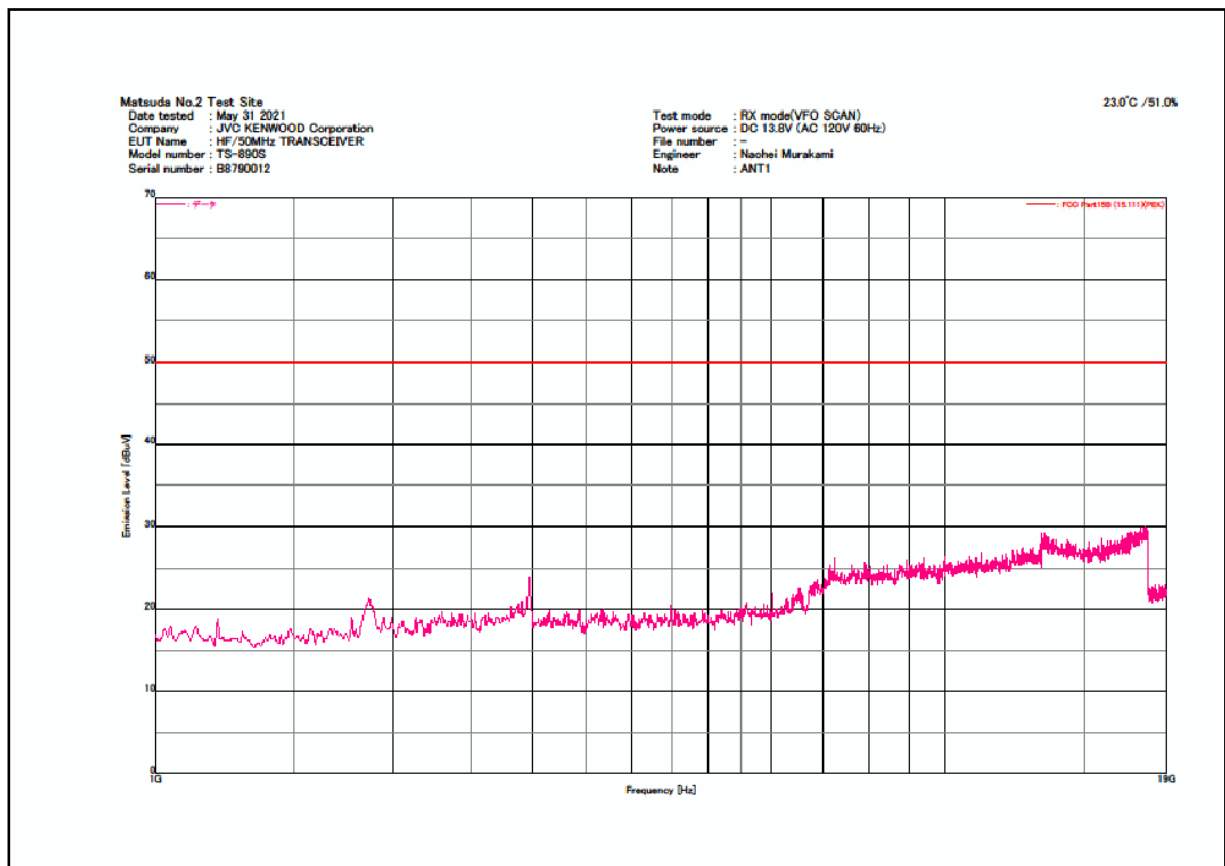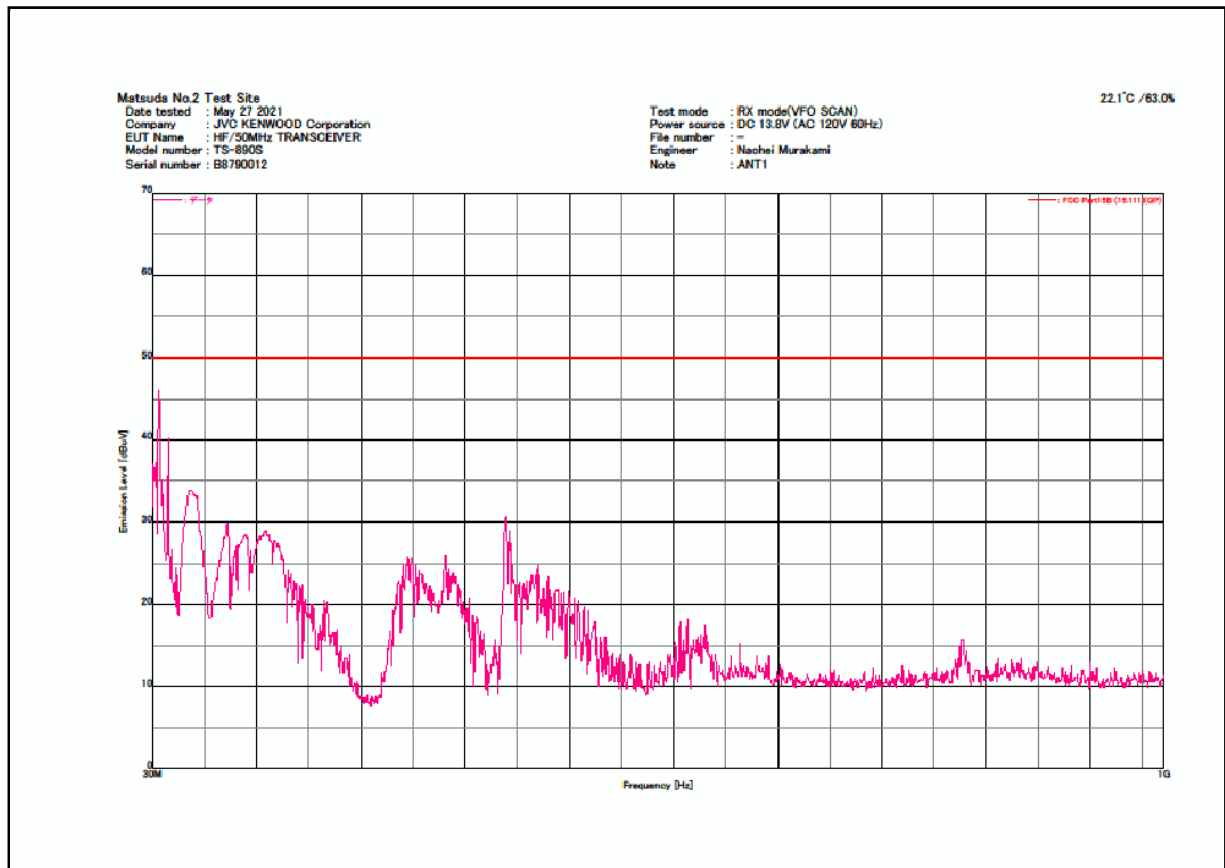


9.1.3.5 RX mode(0.1000MHz) ANT2
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(0.1000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 27 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 22.1 [degC]
HUMIDITY : 63.0 [%]
NOTE : ANT2

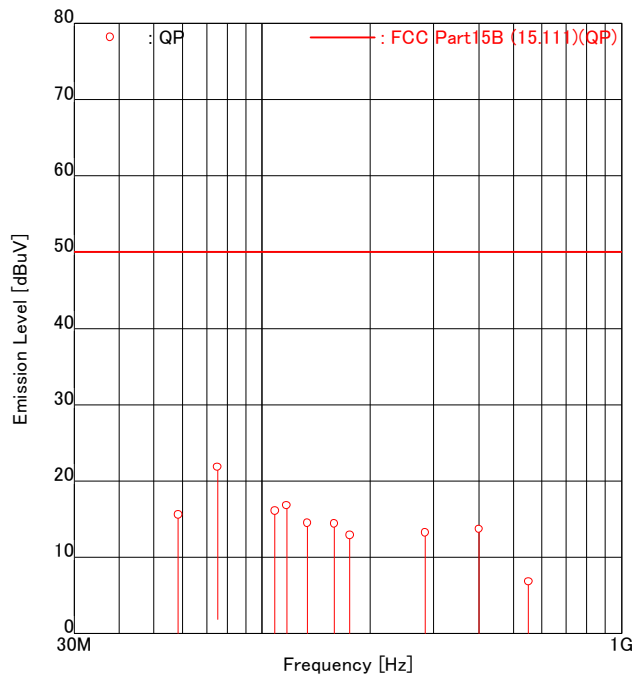

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	58.4379	<u>37.1</u>	-21.5	<u>15.6</u>	50.0	<u>34.4</u>
2	75.1308	<u>43.2</u>	-21.4	<u>21.8</u>	50.0	<u>28.2</u>
3	108.5246	<u>37.3</u>	-21.2	<u>16.1</u>	50.0	<u>33.9</u>
4	116.8722	<u>38.0</u>	-21.2	<u>16.8</u>	50.0	<u>33.2</u>
5	133.5690	<u>35.6</u>	-21.1	<u>14.5</u>	50.0	<u>35.5</u>
6	158.6136	<u>35.4</u>	-21.0	<u>14.4</u>	50.0	<u>35.6</u>
7	175.3072	33.9	-21.0	12.9	50.0	37.1
8	283.8320	34.0	-20.8	13.2	50.0	36.8
9	400.7030	34.2	-20.5	13.7	50.0	36.3
10	550.9674	26.8	-20.0	6.8	50.0	43.2

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(0.1000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANT2

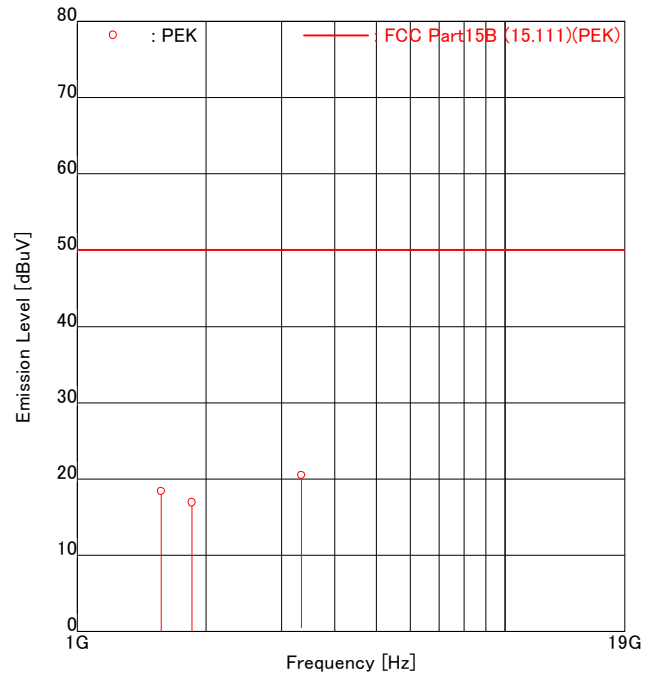

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1570.0900	<u>40.8</u>	-22.4	<u>18.4</u>	50.0	<u>31.6</u>
2	1853.2700	<u>38.5</u>	-21.6	<u>16.9</u>	50.0	<u>33.1</u>
3	3339.2000	<u>39.8</u>	-19.3	<u>20.5</u>	50.0	<u>29.5</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad,Cable,Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)


9.1.3.6 RX mode(30.0000MHz) ANT2
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(30.0000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 27 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 22.1 [degC]
HUMIDITY : 63.0 [%]
NOTE : ANT2

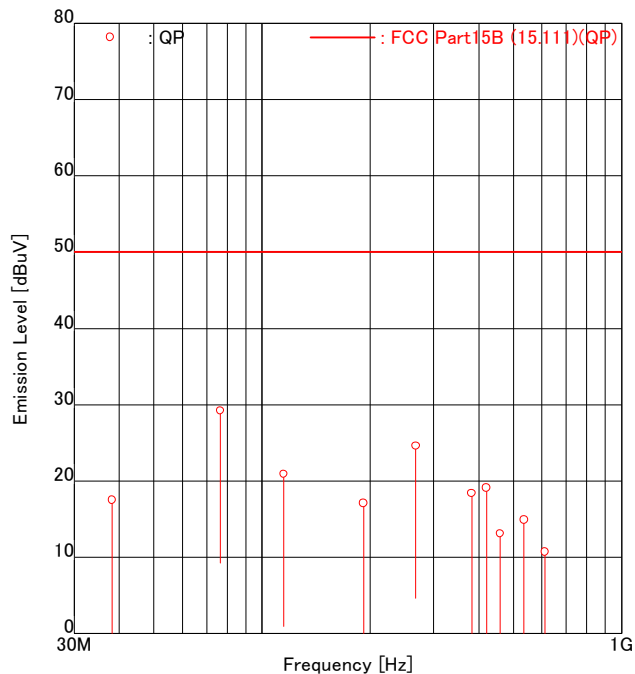

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	38.2496	<u>39.3</u>	-21.8	<u>17.5</u>	50.0	<u>32.5</u>
2	76.4951	<u>50.6</u>	-21.4	<u>29.2</u>	50.0	<u>20.8</u>
3	114.7450	<u>42.1</u>	-21.2	<u>20.9</u>	50.0	<u>29.1</u>
4	191.2390	38.0	-20.9	17.1	50.0	32.9
5	267.7370	<u>45.3</u>	-20.7	<u>24.6</u>	50.0	<u>25.4</u>
6	382.4798	<u>38.9</u>	-20.5	<u>18.4</u>	50.0	<u>31.6</u>
7	420.7294	<u>39.5</u>	-20.4	<u>19.1</u>	50.0	<u>30.9</u>
8	458.9770	33.4	-20.3	13.1	50.0	36.9
9	535.4730	35.0	-20.1	14.9	50.0	35.1
10	611.9700	30.5	-19.8	10.7	50.0	39.3

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(30.0000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANT2

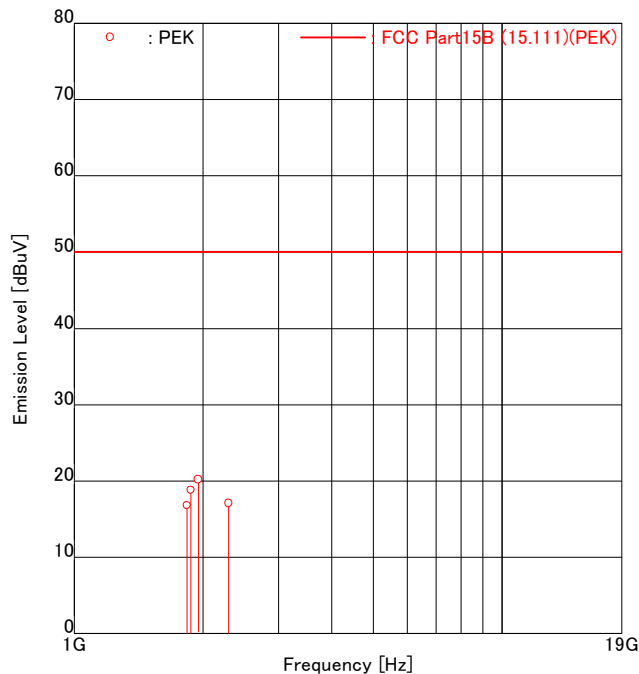

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1835.9000	<u>38.5</u>	-21.7	<u>16.8</u>	50.0	<u>33.2</u>
2	1874.1500	<u>40.4</u>	-21.6	<u>18.8</u>	50.0	<u>31.2</u>
3	1950.7000	<u>41.5</u>	-21.3	<u>20.2</u>	50.0	<u>29.8</u>
4	2294.8800	<u>37.9</u>	-20.8	<u>17.1</u>	50.0	<u>32.9</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad,Cable,Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)


9.1.3.7 RX mode(59.9999MHz) ANT2
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(59.9999MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 27 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 22.1 [degC]
HUMIDITY : 63.0 [%]
NOTE : ANT2

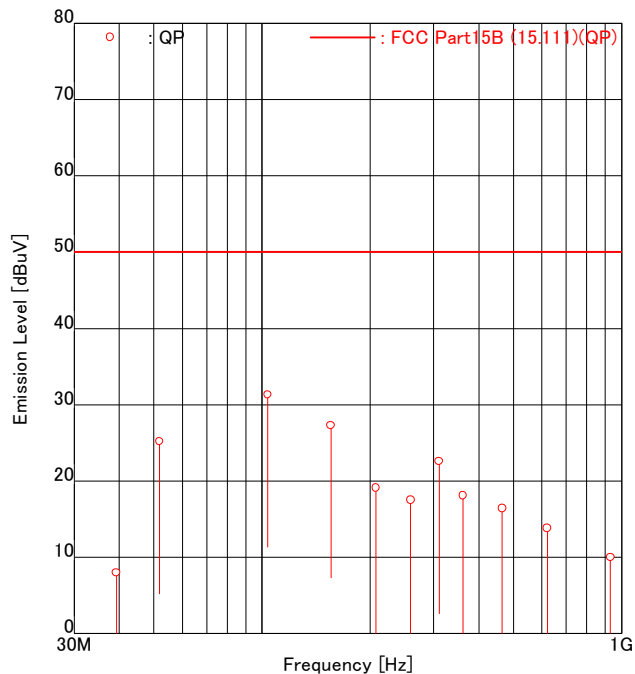

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	39.2709	29.8	-21.8	8.0	50.0	42.0
2	51.7532	<u>46.9</u>	-21.7	<u>25.2</u>	50.0	<u>24.8</u>
3	103.5074	<u>52.5</u>	-21.2	<u>31.3</u>	50.0	<u>18.7</u>
4	155.2522	<u>48.3</u>	-21.0	<u>27.3</u>	50.0	<u>22.7</u>
5	207.0088	<u>40.1</u>	-21.0	<u>19.1</u>	50.0	<u>30.9</u>
6	258.7588	38.2	-20.7	17.5	50.0	32.5
7	310.5084	<u>43.3</u>	-20.7	<u>22.6</u>	50.0	<u>27.4</u>
8	362.2642	<u>38.7</u>	-20.6	<u>18.1</u>	50.0	<u>31.9</u>
9	465.7686	36.7	-20.3	16.4	50.0	33.6
10	621.0266	33.5	-19.7	13.8	50.0	36.2
11	931.5374	29.2	-19.2	10.0	50.0	40.0

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(59.9999MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANT2

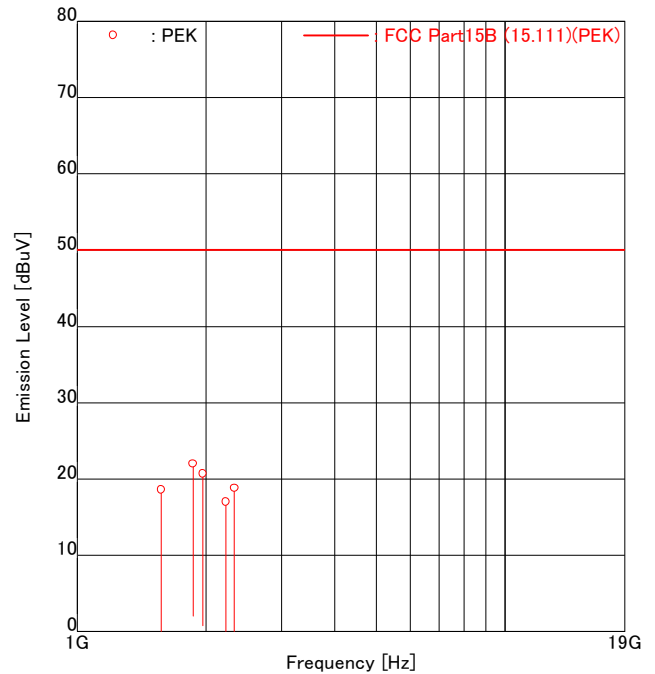

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1570.8700	<u>41.0</u>	-22.4	<u>18.6</u>	50.0	<u>31.4</u>
2	1863.0000	<u>43.6</u>	-21.6	<u>22.0</u>	50.0	<u>28.0</u>
3	1965.5000	<u>42.0</u>	-21.3	<u>20.7</u>	50.0	<u>29.3</u>
4	2225.4000	<u>38.0</u>	-21.0	<u>17.0</u>	50.0	<u>33.0</u>
5	2329.0000	<u>39.5</u>	-20.7	<u>18.8</u>	50.0	<u>31.2</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad,Cable,Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)


9.1.3.8 RX mode(VFO SCAN) ANT2
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(VFO SCAN)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 28 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 20.0 [degC]
HUMIDITY : 68.0 [%]
NOTE : ANT2

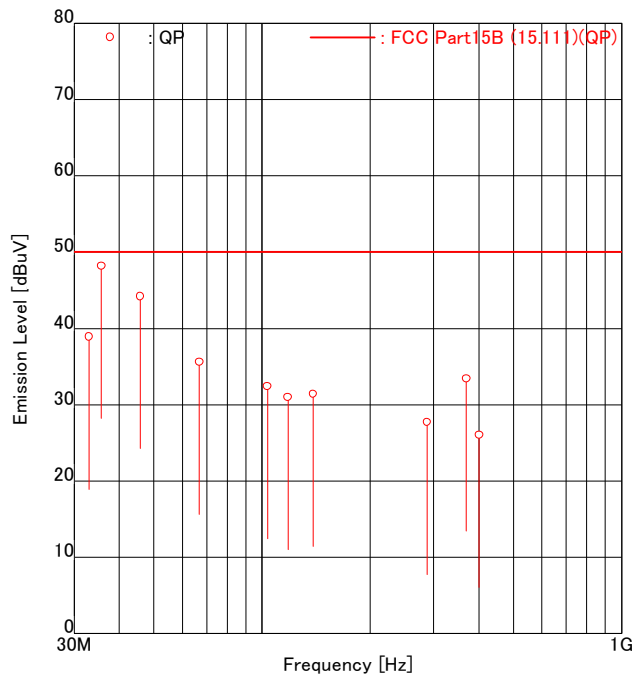

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	35.7542	<u>70.0</u>	-21.8	<u>48.2</u>	50.0	<u>1.8</u>
2	32.9686	<u>60.8</u>	-21.9	<u>38.9</u>	50.0	<u>11.1</u>
3	45.7372	<u>65.9</u>	-21.7	<u>44.2</u>	50.0	<u>5.8</u>
4	66.9083	<u>57.1</u>	-21.5	<u>35.6</u>	50.0	<u>14.4</u>
5	103.4351	<u>53.6</u>	-21.2	<u>32.4</u>	50.0	<u>17.6</u>
6	117.9766	52.2	-21.2	31.0	50.0	19.0
7	138.5280	52.5	-21.1	31.4	50.0	18.6
8	287.3568	48.5	-20.8	27.7	50.0	22.3
9	369.9588	<u>53.9</u>	-20.5	<u>33.4</u>	50.0	<u>16.6</u>
10	401.6638	46.5	-20.5	26.0	50.0	24.0

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port



APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(VFO SCAN)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANT2

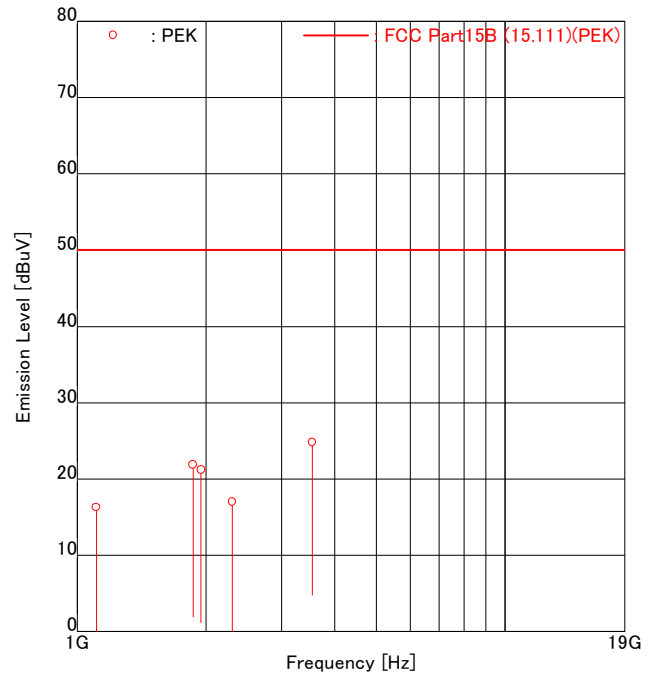

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1108.0000	<u>38.5</u>	-22.2	<u>16.3</u>	50.0	<u>33.7</u>
2	1863.3400	<u>43.5</u>	-21.6	<u>21.9</u>	50.0	<u>28.1</u>
3	1948.8200	<u>42.6</u>	-21.4	<u>21.2</u>	50.0	<u>28.8</u>
4	2304.1000	<u>37.8</u>	-20.8	<u>17.0</u>	50.0	<u>33.0</u>
5	3540.0000	<u>43.8</u>	-19.0	<u>24.8</u>	50.0	<u>25.2</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)

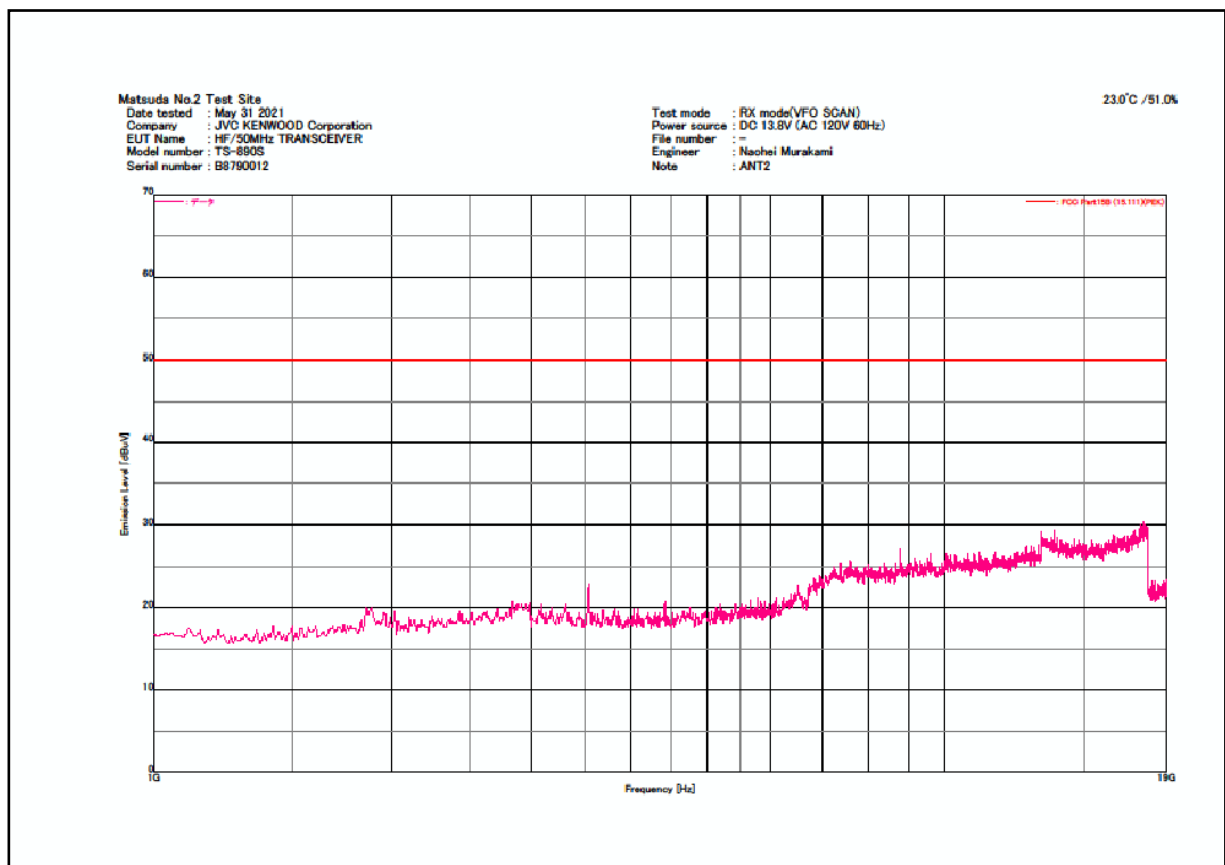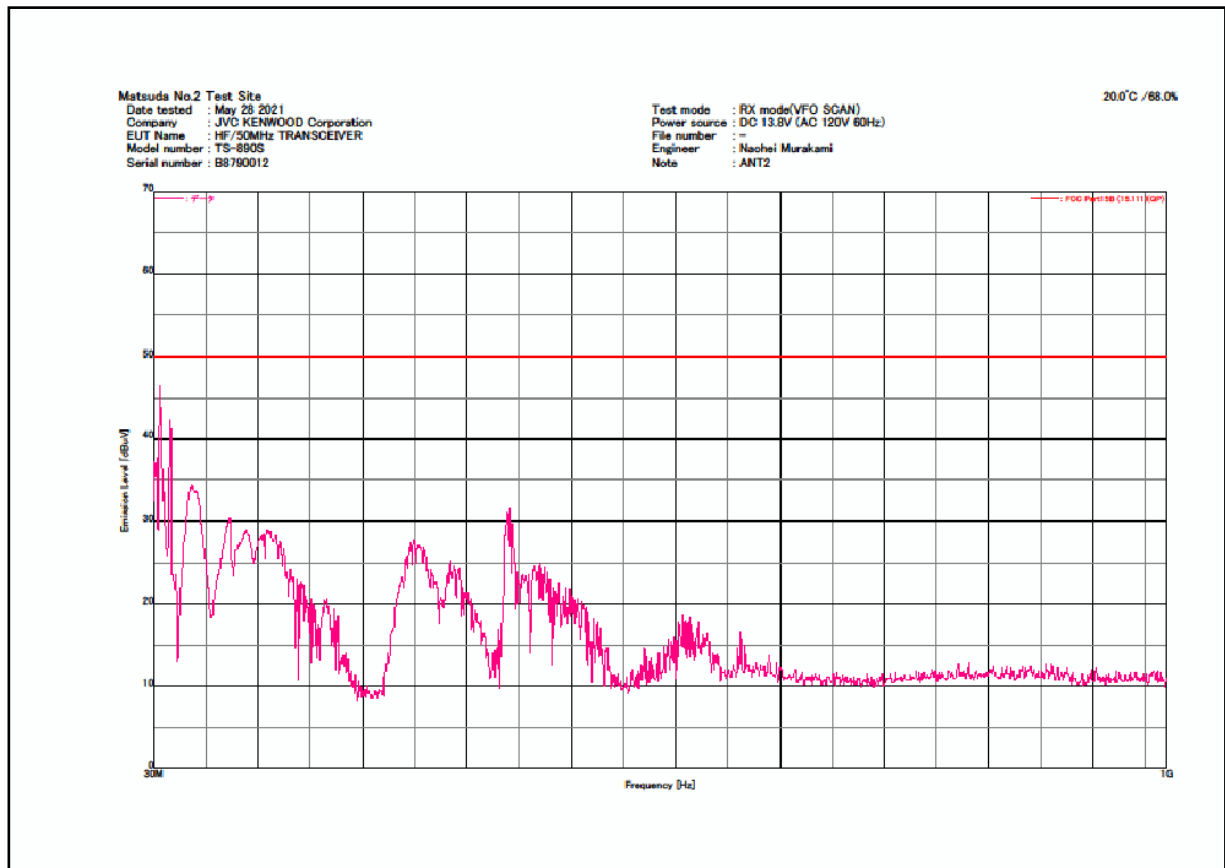


9.1.3.9 RX mode(0.1000MHz) ANTRX
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(0.1000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 28 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 20.0 [degC]
HUMIDITY : 68.0 [%]
NOTE : ANTRX

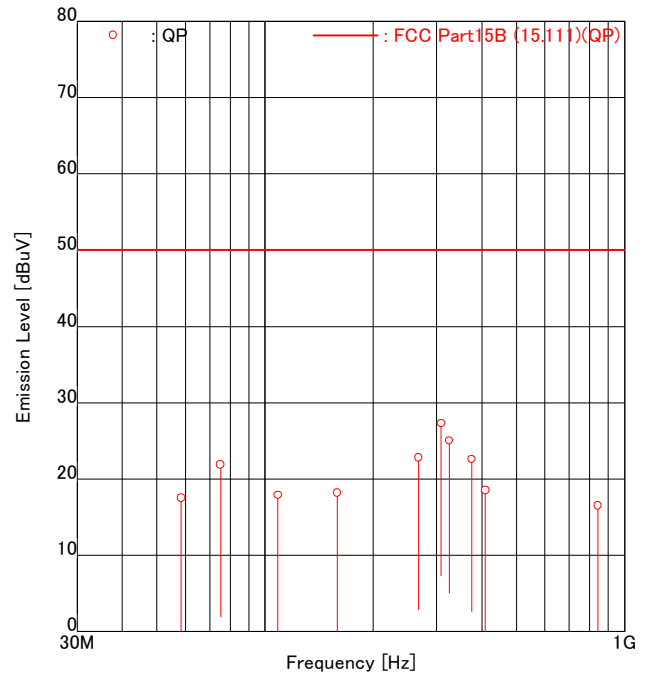

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	58.4346	39.0	-21.5	17.5	50.0	32.5
2	75.1310	<u>43.3</u>	-21.4	<u>21.9</u>	50.0	<u>28.1</u>
3	108.5238	39.1	-21.2	17.9	50.0	32.1
4	158.6110	39.2	-21.0	18.2	50.0	31.8
5	267.1338	<u>43.5</u>	-20.7	<u>22.8</u>	50.0	<u>27.2</u>
6	308.8768	<u>48.0</u>	-20.7	<u>27.3</u>	50.0	<u>22.7</u>
7	325.5724	<u>45.7</u>	-20.7	<u>25.0</u>	50.0	<u>25.0</u>
8	375.6588	<u>43.1</u>	-20.5	<u>22.6</u>	50.0	<u>27.4</u>
9	410.3226	<u>38.9</u>	-20.4	<u>18.5</u>	50.0	<u>31.5</u>
10	843.1508	35.7	-19.2	16.5	50.0	33.5

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(0.1000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANTRX

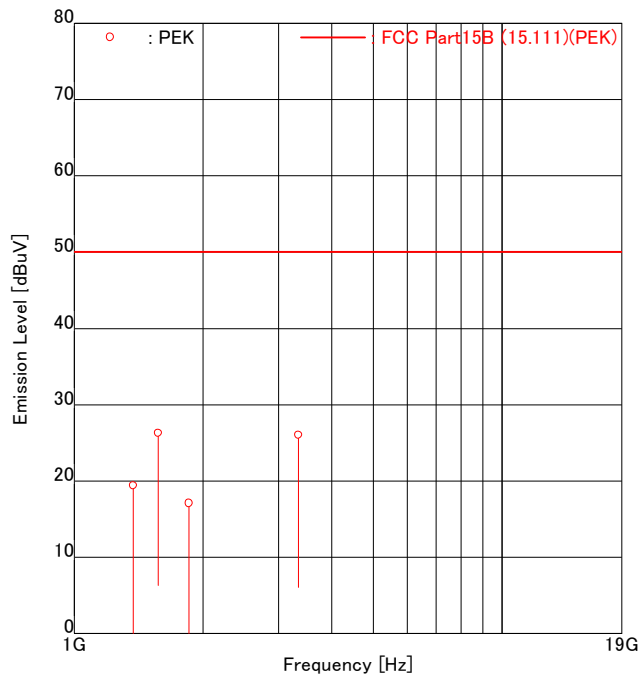

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1374.5000	<u>41.9</u>	-22.5	<u>19.4</u>	50.0	<u>30.6</u>
2	1571.0000	<u>48.7</u>	-22.4	<u>26.3</u>	50.0	<u>23.7</u>
3	1853.3000	<u>38.7</u>	-21.6	<u>17.1</u>	50.0	<u>32.9</u>
4	3339.2100	<u>45.3</u>	-19.3	<u>26.0</u>	50.0	<u>24.0</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad,Cable,Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)


9.1.3.10 RX mode(30.0000MHz) ANTRX
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(30.0000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 28 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 20.0 [degC]
HUMIDITY : 68.0 [%]
NOTE : ANTRX

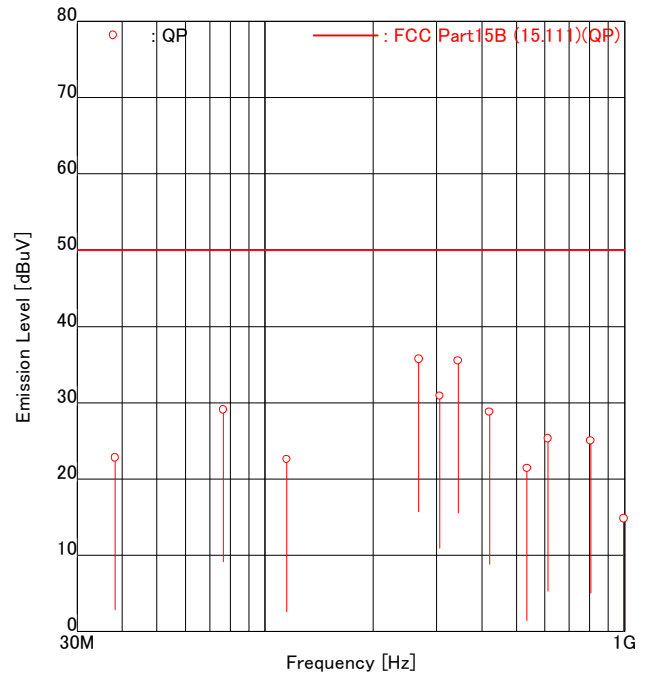

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	38.2480	44.6	-21.8	22.8	50.0	27.2
2	76.4963	50.5	-21.4	29.1	50.0	20.9
3	114.7440	43.8	-21.2	22.6	50.0	27.4
4	267.7370	56.4	-20.7	35.7	50.0	14.3
5	305.9840	<u>51.6</u>	-20.7	<u>30.9</u>	50.0	<u>19.1</u>
6	344.2300	<u>56.2</u>	-20.7	<u>35.5</u>	50.0	<u>14.5</u>
7	420.7290	<u>49.2</u>	-20.4	<u>28.8</u>	50.0	<u>21.2</u>
8	535.4740	41.5	-20.1	21.4	50.0	28.6
9	611.9700	45.1	-19.8	25.3	50.0	24.7
10	803.2100	44.2	-19.2	25.0	50.0	25.0
11	994.4510	34.2	-19.4	14.8	50.0	35.2

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(30.0000MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANTRX

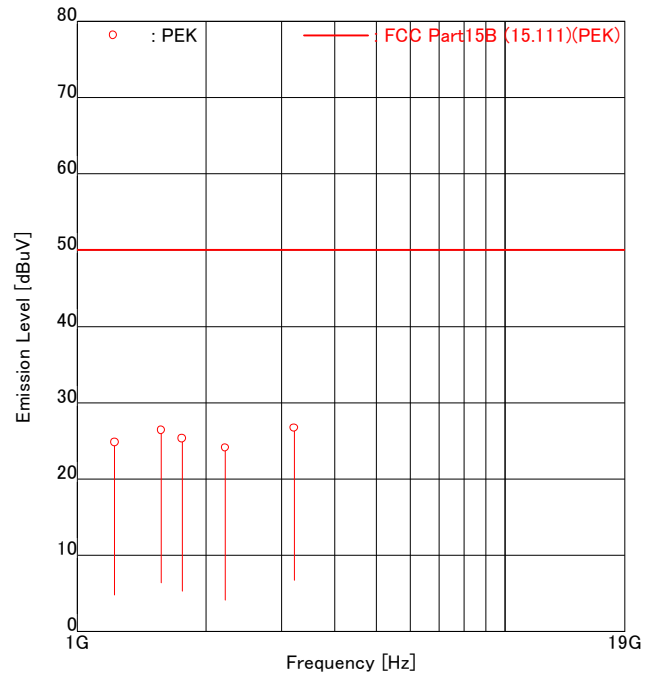

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1223.9400	<u>47.1</u>	-22.3	<u>24.8</u>	50.0	<u>25.2</u>
2	1570.1000	<u>48.8</u>	-22.4	<u>26.4</u>	50.0	<u>23.6</u>
3	1759.3000	<u>47.2</u>	-21.9	<u>25.3</u>	50.0	<u>24.7</u>
4	2218.5500	<u>45.1</u>	-21.0	<u>24.1</u>	50.0	<u>25.9</u>
5	3213.0000	<u>46.2</u>	-19.5	<u>26.7</u>	50.0	<u>23.3</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad,Cable,Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)


9.1.3.11 RX mode(59.9999MHz) ANTRX
30 – 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(59.9999MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 28 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 20.0 [degC]
HUMIDITY : 68.0 [%]
NOTE : ANTRX

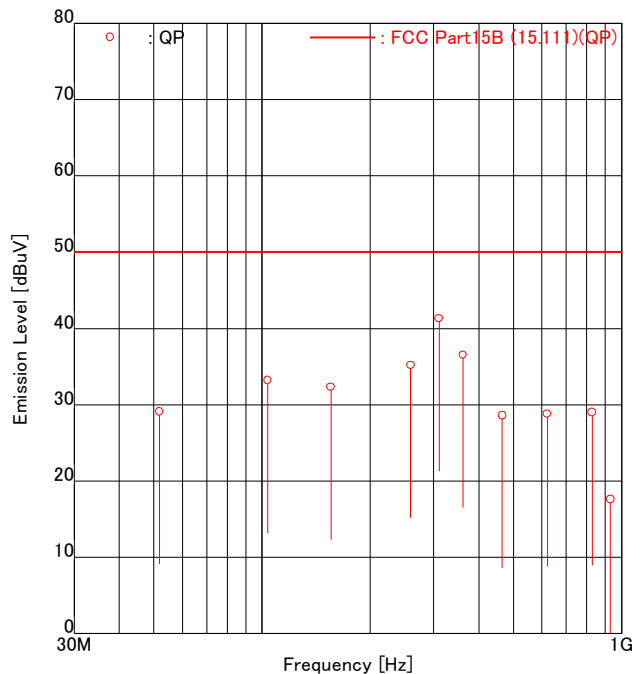

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	51.7516	<u>50.8</u>	-21.7	<u>29.1</u>	50.0	<u>20.9</u>
2	103.5040	<u>54.4</u>	-21.2	<u>33.2</u>	50.0	<u>16.8</u>
3	155.2560	<u>53.3</u>	-21.0	<u>32.3</u>	50.0	<u>17.7</u>
4	258.7600	<u>55.9</u>	-20.7	<u>35.2</u>	50.0	<u>14.8</u>
5	310.5130	<u>62.0</u>	-20.7	<u>41.3</u>	50.0	<u>8.7</u>
6	362.2650	<u>57.1</u>	-20.6	<u>36.5</u>	50.0	<u>13.5</u>
7	465.7690	48.9	-20.3	28.6	50.0	21.4
8	621.0260	48.5	-19.7	28.8	50.0	21.2
9	828.0340	48.2	-19.2	29.0	50.0	21.0
10	931.5390	36.8	-19.2	17.6	50.0	32.4

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(59.9999MHz)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANTRX

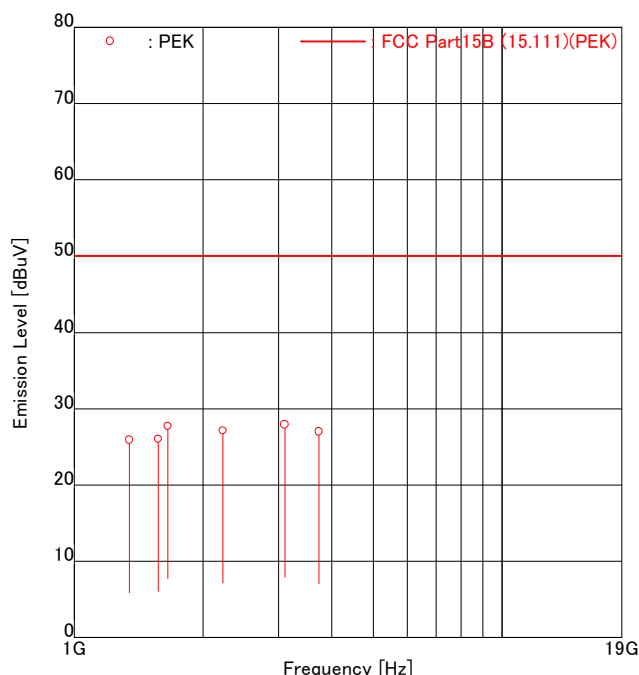

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1345.5000	<u>48.4</u>	-22.5	<u>25.9</u>	50.0	<u>24.1</u>
2	1571.0000	<u>48.4</u>	-22.4	<u>26.0</u>	50.0	<u>24.0</u>
3	1656.0000	<u>49.9</u>	-22.2	<u>27.7</u>	50.0	<u>22.3</u>
4	2225.3000	<u>48.1</u>	-21.0	<u>27.1</u>	50.0	<u>22.9</u>
5	3105.1000	<u>47.5</u>	-19.6	<u>27.9</u>	50.0	<u>22.1</u>
6	3726.2000	<u>45.7</u>	-18.7	<u>27.0</u>	50.0	<u>23.0</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad,Cable,Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)


**9.1.3.12 RX mode(VFO SCAN) ANTRX
30 – 1000 MHz**

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port

APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(VFO SCAN)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 28 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 20.0 [degC]
HUMIDITY : 68.0 [%]
NOTE : ANTRX

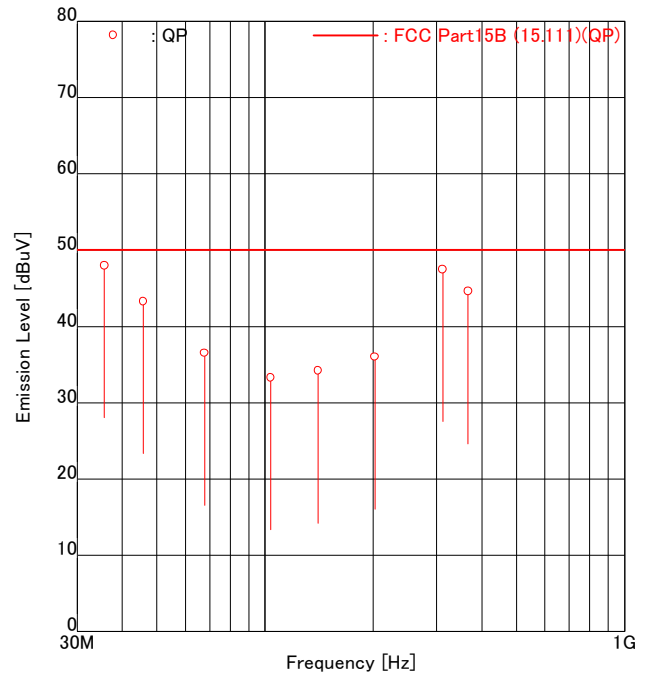

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	35.7507	<u>69.8</u>	-21.8	<u>48.0</u>	50.0	<u>2.0</u>
2	45.7462	<u>65.0</u>	-21.7	<u>43.3</u>	50.0	<u>6.7</u>
3	67.8251	<u>58.0</u>	-21.5	<u>36.5</u>	50.0	<u>13.5</u>
4	103.4970	<u>54.5</u>	-21.2	<u>33.3</u>	50.0	<u>16.7</u>
5	140.2980	<u>55.3</u>	-21.1	<u>34.2</u>	50.0	<u>15.8</u>
6	201.9160	<u>57.0</u>	-21.0	<u>36.0</u>	50.0	<u>14.0</u>
7	311.7150	<u>68.2</u>	-20.7	<u>47.5</u>	50.0	<u>2.5</u>
8	366.9140	<u>65.1</u>	-20.5	<u>44.6</u>	50.0	<u>5.4</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Pad, Cable, Preamp)
Limit : 2nW = 50dBuV(50ohm impedance)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


Above 1000 MHz

Intertek Japan K.K.

Matsuda No.2 Test Site

Conducted Power on Antenna Port



APPLICANT : JVCKENWOOD Corporation
EUT NAME : HF/50MHz TRANSCEIVER
MODEL NO. : TS-890S
SERIAL NO. : B8790012
TEST MODE : RX mode(VFO SCAN)
POWER SOURCE : DC 13.8V (AC 120V 60Hz)
DATE TESTED : May 31 2021
FILE NO. : -
REGULATION : FCC Part15B (15.111)
TEST METHOD : ANSI C63.4-2014
TEMPERATURE : 23.0 [degC]
HUMIDITY : 51.0 [%]
NOTE : ANTRX

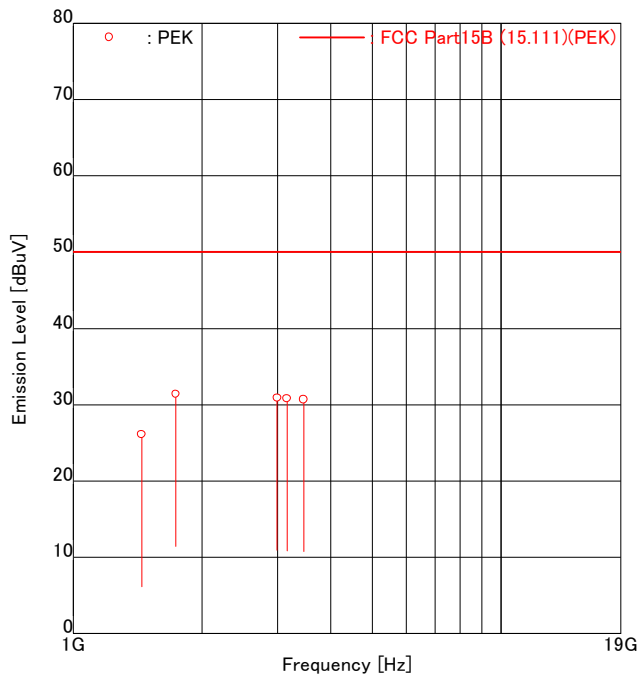

ENGINEER : Naohei Murakami

FREQUENCY [No]	FREQUENCY [MHz]	READING [dBuV]	FACTOR [dB]	EMISSION [dBuV]	LIMIT [dBuV]	MARGIN [dB]
1	1443.5000	<u>48.6</u>	-22.5	<u>26.1</u>	50.0	<u>23.9</u>
2	1735.5000	<u>53.3</u>	-21.9	<u>31.4</u>	50.0	<u>18.6</u>
3	2997.1000	<u>50.6</u>	-19.7	<u>30.9</u>	50.0	<u>19.1</u>
4	3157.3600	<u>50.3</u>	-19.5	<u>30.8</u>	50.0	<u>19.2</u>
5	3454.2000	<u>49.9</u>	-19.2	<u>30.7</u>	50.0	<u>19.3</u>

Higher six points are underlined.
Other frequencies : Below the FCC Part15B (15.111) limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)

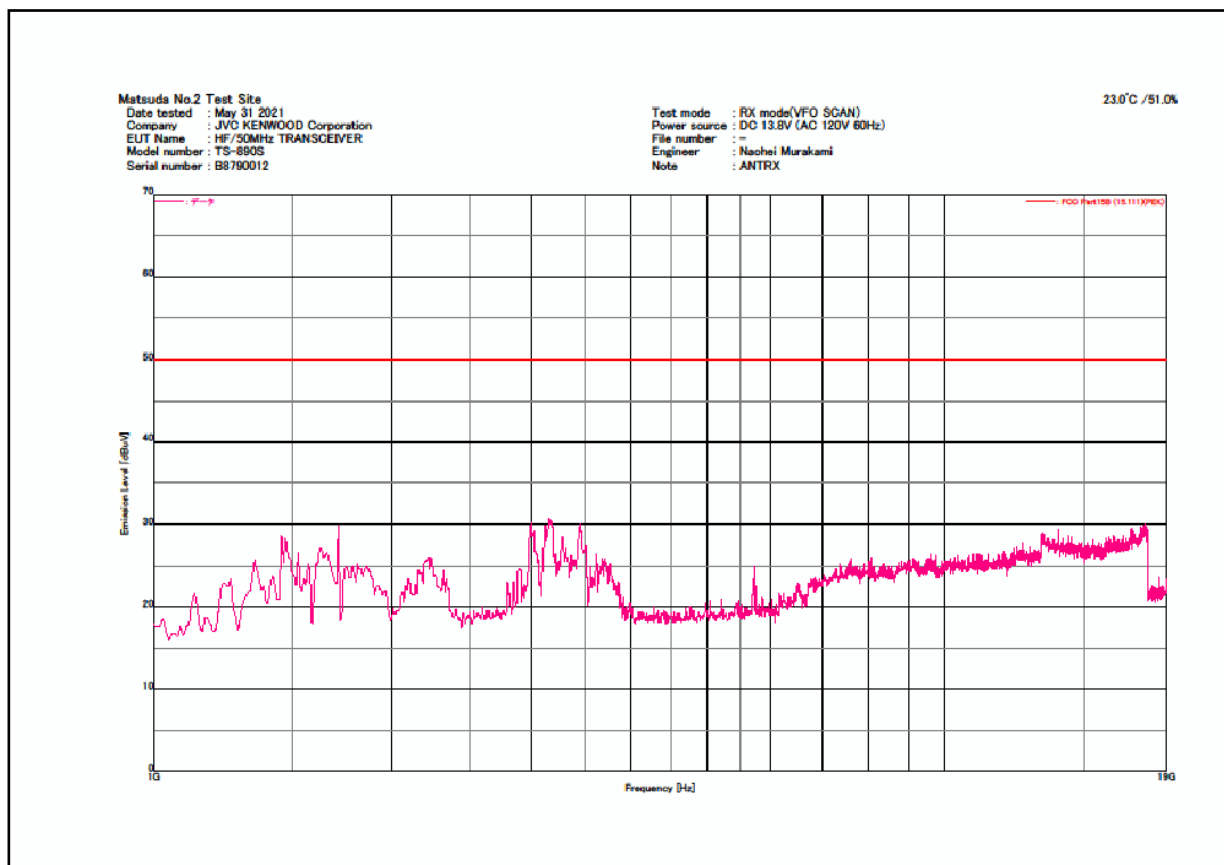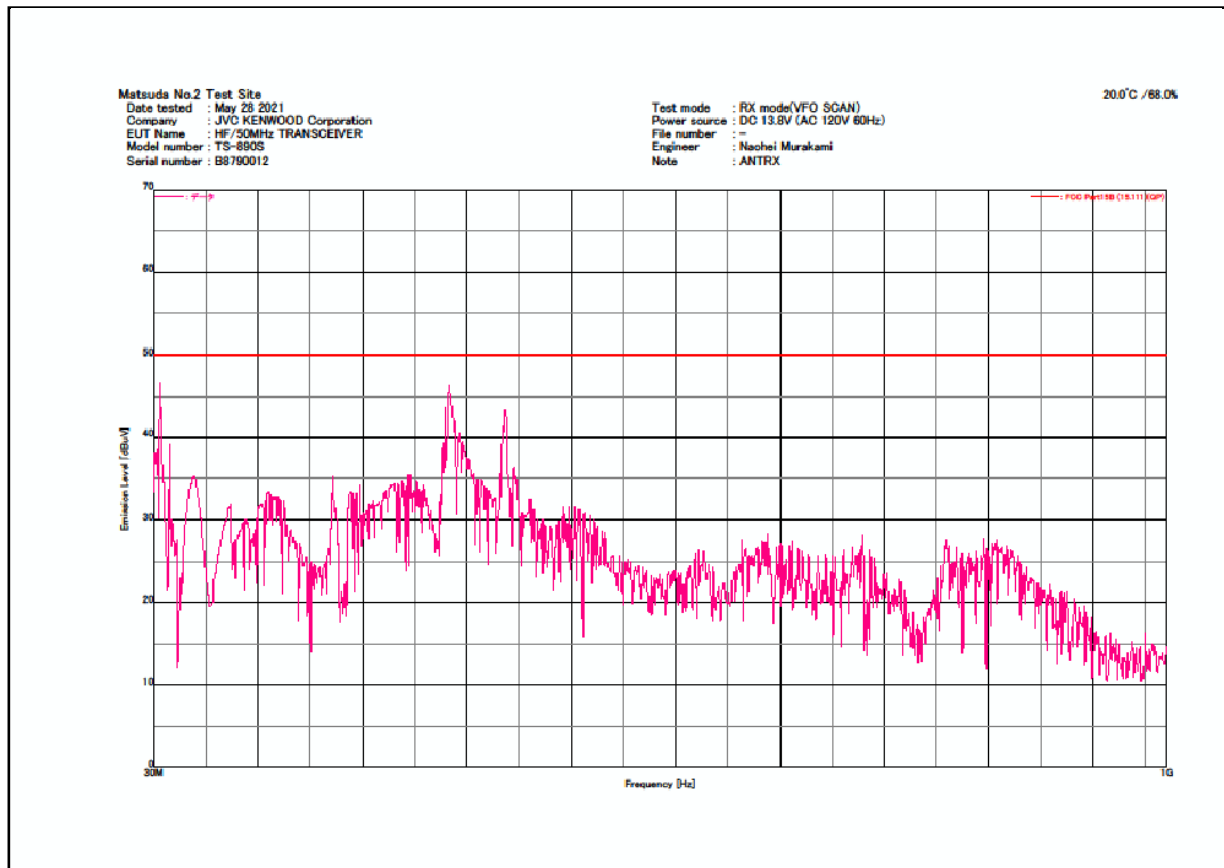

9.2 38dB Rejection Test

Location	Matsuda No.2 Test Site
Test Engineer	Naohei Murakami
Date Tested	From May 28, 2021 to May 29, 2021
Temperature Variation	17.5 – 20.2 [degC]
Humidity Variation	45 - 57 [%]

Test Procedure

Item	Document number
38dB Rejection test	LEN-RJP-TE102

9.2.1 Result of 38dB Rejection

9.2.1.1 VFO SCAN mode (ANT1)

Injected Frequency [MHz]	Detected Frequency [MHz]	12dB SINAD Reading Injected Frequency [dBm]	12dB SINAD Reading Detected Frequency	Rejection Level [dB]	Margin [dB]
824.040	No Point Detected	See Note	See Note	-	-
836.505	No Point Detected	See Note	See Note	-	-
848.970	No Point Detected	See Note	See Note	-	-
869.040	No Point Detected	See Note	See Note	-	-
881.505	No Point Detected	See Note	See Note	-	-
893.970	No Point Detected	See Note	See Note	-	-

Note : There was no need to carry out the measurements because no point was detected.

SG Input Level = 73dBuV

SG Reference Level = 5.0dBuV (the worst case sensitivity)

9.2.1.2 VFO SCAN mode (ANT2)

Injected Frequency [MHz]	Detected Frequency [MHz]	12dB SINAD Reading Injected Frequency [dBm]	12dB SINAD Reading Detected Frequency	Rejection Level [dB]	Margin [dB]
824.040	No Point Detected	See Note	See Note	-	-
836.505	No Point Detected	See Note	See Note	-	-
848.970	No Point Detected	See Note	See Note	-	-
869.040	No Point Detected	See Note	See Note	-	-
881.505	No Point Detected	See Note	See Note	-	-
893.970	No Point Detected	See Note	See Note	-	-

Note : There was no need to carry out the measurements because no point was detected.

SG Input Level = 72dBuV

SG Reference Level = 6.0dBuV (the worst case sensitivity)

9.2.1.3 VFO SCAN mode (ANTRX)

Injected Frequency [MHz]	Detected Frequency [MHz]	12dB SINAD Reading Injected Frequency [dBm]	12dB SINAD Reading Detected Frequency	Rejection Level [dB]	Margin [dB]
824.040	No Point Detected	See Note	See Note	-	-
836.505	No Point Detected	See Note	See Note	-	-
848.970	No Point Detected	See Note	See Note	-	-
869.040	No Point Detected	See Note	See Note	-	-
881.505	No Point Detected	See Note	See Note	-	-
893.970	No Point Detected	See Note	See Note	-	-

Note : There was no need to carry out the measurements because no point was detected.

SG Input Level = 70dBuV

SG Reference Level = 4.0dBuV (the worst case sensitivity)

SECTION 10. LIST OF MEASURING INSTRUMENTS

Test instruments are calibrated according to Quality Manual and Calibration Rules of Intertek Japan K.K.
All measurements equipment used for the measurement is calibrated based on standard.
Each measurement result is traceable to national or international standards.
Antenna used for the measurement is calibrated based on the ANSI C63.5.

10.1 Emission tests

Instrument	Model No.	Serial No.	Manufacturer	Cal. Interval	Effective period
Conducted disturbance at mains terminals					
LISN(EUT)	ESH2-Z5	882395/019	Rohde & Schwarz	1 Y	Jun. 2021
LISN(Peripheral)	KNW-407	8-1395-2	Kyoritsu	1 Y	Jun. 2021
10dB LISN Pad	CFA-01	E04AT10B	TAMAGAWA	1 Y	Jun. 2021
10dB LISN Pad	6801.01.A	788072	HUBER+SUHNER	1 Y	Jun. 2021
50Ω Termination	65BNC-50-0-2/133NE	E02TRM50A	SUHNER	1 Y	Jun. 2021
Coaxial Cable (C1)	3D-2W(7.8m)	MTS02CSR-1	Intertek	1 Y	Jan. 2022
Coaxial Cable (C2)	RG-5A/U(12.0m)	MTS02CSR-2	Intertek	1 Y	Jan. 2022
Coaxial Cable (C3)	RG214HF(1.5m)	MTS02CSR-3	SUHNER	1 Y	Jan. 2022
Coaxial Cable (C4)	RG214HF(1.5m)	MTS02CSR-4	SUHNER	1 Y	Jan. 2022
Coaxial Cable (C5)	RG214HF(1.5m)	MTS02CSR-5	SUHNER	1 Y	Jan. 2022
RF Switch(1)	MP59B	M7736	ANRITSU	1 Y	Jan. 2022
RF Switch(2)	ACX-150-1	E02301501	Intertek	1 Y	Jan. 2022
Test Receiver	ESS (Firmware Version 1.21)	839643/008	Rohde & Schwarz	1 Y	Aug. 2021
Testing Software	emiT (Version 3,0,0,0)			N/A	N/A

Note: The effective period is to the last day of month listed.

Radiated disturbance (30-1000 MHz)					
Broad Band Antenna	VULB9168	124	Schwarzbeck	1 Y	Jul. 2021
Amplifier	8447D	2727A05809	Hewlett Packard	1 Y	Jan. 2022
Step Attenuator	8494B	2805A14576	Hewlett Packard	1 Y	Jan. 2022
6dB Attenuator	MP721B	M87938	ANRITSU	1 Y	Jan. 2022
Coaxial Cable (R1)	RG214HF(8.0m)	MTS02R3-1	SUHNER	1 Y	Jan. 2022
Coaxial Cable (R2)	12D-SFA(28.0m)	MTS02R3-2	Intertek	1 Y	Jan. 2022
Coaxial Cable (R3)	RG214HF(2.0m)	MTS02R3-3	SUHNER	1 Y	Jan. 2022
Coaxial Cable (R4)	RG214HF(0.4m)	MTS02R3-4	SUHNER	1 Y	Jan. 2022
Coaxial Cable (R5)	RG214HF(0.4m)	MTS02R3-5	SUHNER	1 Y	Jan. 2022
Coaxial Cable (R6)	RG214HF(1.5m)	MTS02R3-6	SUHNER	1 Y	Jan. 2022
Coaxial Cable (R7)	RG214HF(1.5m)	MTS02R3-7	SUHNER	1 Y	Jan. 2022
Coaxial Cable (R8)	RG214HF(1.5m)	MTS02R3-8	SUHNER	1 Y	Jan. 2022
Coaxial Cable (R9)	5D-2W(8.0m)	MTS02R3-9	SUHNER	1 Y	Jan. 2022
RF Switch(1)	MP59B	M7736	ANRITSU	1 Y	Jan. 2022
RF Switch(2)	ACX-150-1	E02301501	Intertek	1 Y	Jan. 2022
Test Receiver	ESS (Firmware Version 1.21)	839643/008	Rohde & Schwarz	1 Y	Aug. 2021
Site Attenuation	-	-	-	1 Y	May 2022
Radiated disturbance (Above 1GHz)					
Double Ridged Antenna	3115	2568	EMCO	1 Y	Mar. 2022
Horn Antenna with Preamplifier	MLA-18265-B03-30	1694440	TSJ	1Y	May 2022
Amplifier	TPA0118-30	950186	TOYO Corporation	1 Y	Mar. 2022
6dB Attenuator	6806.17.B	None(E00AT6GA)	HUBER+SUHNER	1 Y	Mar. 2022
Coaxial Cable (R11)	S04272B/11N/11SMA	38242_1	HUBER+SUHNER	1 Y	Nov. 2021
Coaxial Cable (R12)	SUCOFLEX 104	808144/4	HUBER+SUHNER	1 Y	Nov. 2021
Coaxial Cable (G3)	5B-048-98-98-6000	120315	Candox	1Y	May 2022
Test Receiver	ESR26 (Firmware Ver. 3.46 SP1)	101629	Rohde & Schwarz	1 Y	Mar. 2022
SVSWR	1site			1 Y	Sep. 2021
Common					
Testing Software	emiT (Version 3,0,0,0)			N/A	N/A

Note: The effective period is to the last day of month listed.

Conducted power on antenna port					
6dB Attenuator	6806.17.B	None (DML227)	HUBER+SUHNER AG	1Y	Aug. 2021
Amplifier	8447D	1937A02669	HP	1Y	Sep. 2021
Coaxial Cable (R13)	5D-2W(8.0 m)	EM0CS012	FUJIKURA	1Y	Jan. 2022
Coaxial Cable (R14)	RG214HF	EM0CS014	HUBER+SUHNE	1Y	Jan. 2022
Coaxial Cable (R15)	RG214HF	EM0CS0	HUBER+SUHNE	1Y	Jan. 2022
RF Switch	ACX-150-1	EM0CS013	Intertek	1Y	Jan. 2022
6dB Attenuator	8493C	18477	HP	1Y	Mar. 2022
Amplifier	83051A	3332A00329	HP	1Y	Mar. 2022
Coaxial Cable (AG1)	SUCOFLEX 104	808144/4	HUBER+SUHNER	1Y	Nov. 2021
Coaxial Cable (AG2)	SUCOFLEX 104PE	94704/4PE	SUHNER	1Y	Mar. 2022
Coaxial Cable (R12)	SUCOFLEX 104	808144/4	HUBER+SUHNER	1 Y	Nov. 2021
Spectrum Analyzer	E4407B	MY44212502	Agilent	1Y	Mar. 2022
Test Receiver	ESS (Firmware Version 1.21)	839643/008	Rohde & Schwarz	1 Y	Aug. 2021
Test Receiver	ESR26 (Firmware Ver. 3.46 SP1)	101629	Rohde & Schwarz	1 Y	Mar. 2022
Testing software	emiT (Version 3,0,0,0)	-	-	-	-
38dB Rejection test					
Audio Analyzer	8903B	2948A07326	Hewlett Packard	1 Y	May 2021
Coaxial Cable (R9)	5D-2W(8.0 m)	EM0CS012	FUJIKURA	1Y	Jan. 2022
Signal Generator	SMB 100A	180010	Rohde&Schwarz	1 Y	Nov. 2021

Note : The effective period is to the last day of month listed.

ANNEX

A. TEST PROCEDURE(S)

Test was carried out under the following conditions.

Conducted disturbance at mains terminals

Test setup as per standard


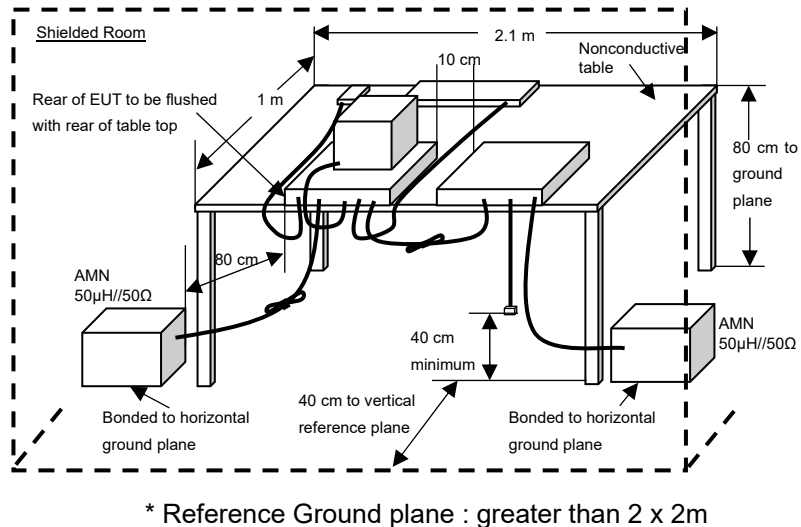


Diagram of the measuring instruments

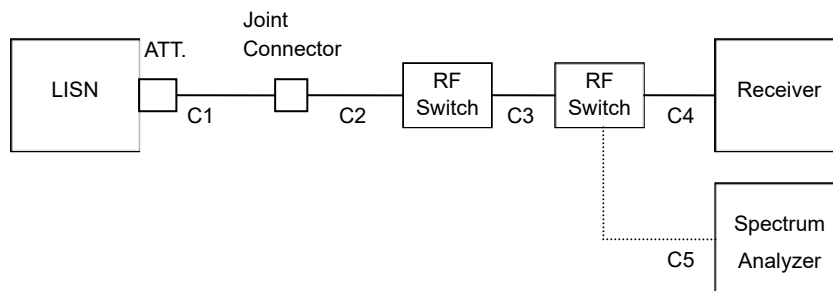

[Preliminary Measurement]

EUT is tested on all operating conditions.

The spectrum analyzer is controlled by the computer program to sweep the frequency range to be measured, then spectrum chart is plotted out to find the worst emission conditions in operating mode and/or configuration decision for the final test.

All leads other than safety ground are tested.

[Final Measurement]

The EUT is operated in the worst emission condition found by the preliminary test.

The equipment and cables are arranged or manipulated within the range of the test standard in the above condition.

At least six highest spectrum are measured in quasi-peak and average (if necessary) using the test receiver.

Radiated disturbance

Test setup as per standard



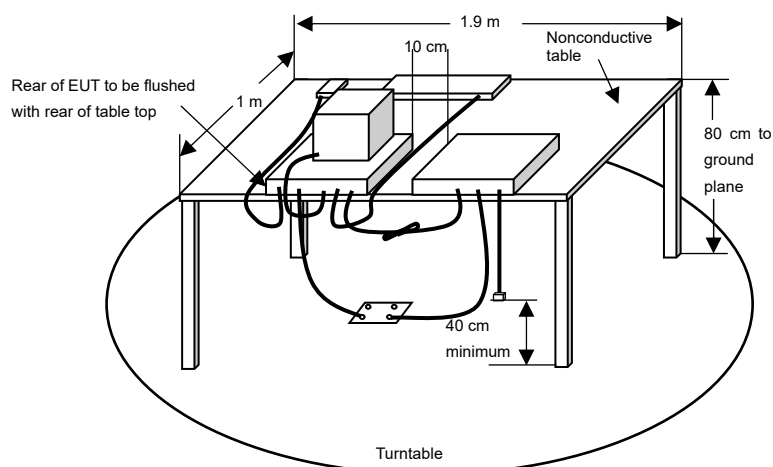


Diagram of the measuring instruments


30 – 1000 MHz

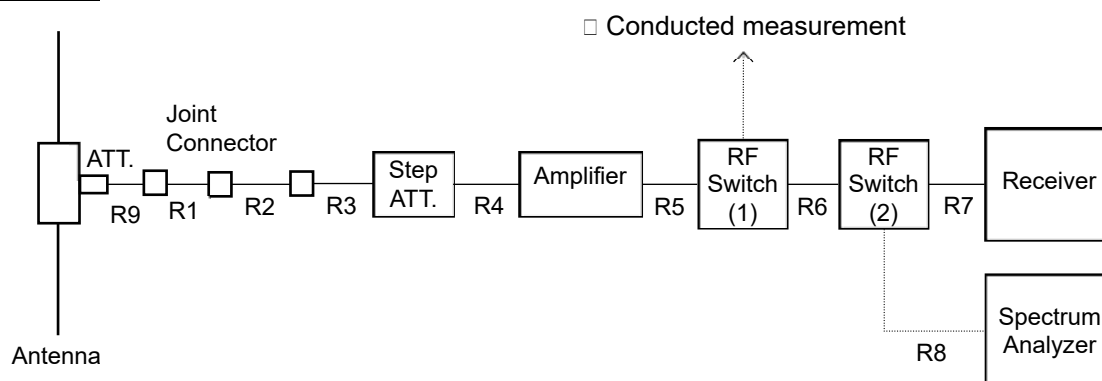

1 – 18 GHz

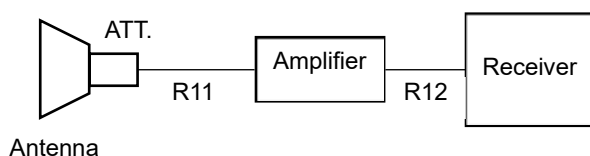

Above 18GHz



[Preliminary Measurement]

EUT is tested on all operating conditions.

The spectrum analyzer is set max-hold mode and swept during turntable was rotated 0 to 360 degree, And find the worst emission conditions in configuration, operating mode, or ambient noise notation.

[Final Measurement]


The EUT operated in the worst emission condition found by the preliminary test.

The turntable azimuth (EUT direction) and antenna height are adjusted the position so that maximum field strength is obtained for each frequency spectrum to be measured.


The equipment and cables are arranged or manipulated within the range of the test standard in the above condition. At least six highest spectrums are measured by the test receiver or spectrum analyzer. When the uncertain result was obtained (30 – 1000 MHz), the measurement is retried by using the half wave dipole antenna instead of the broadband antenna.

Conducted Power on Antenna port (15.111)

Diagram of the measuring instruments (30 - 1000MHz)



Above 1GHz



[Preliminary Measurement]

EUT is tested on all operating conditions.

The spectrum analyzer is controlled by the computer program to sweep the frequency range to be measured, then spectrum chart are plotted out to find the worst emission conditions in operating mode and/or configuration decision for the final test.

[Final Measurement]


The EUT is operated in the worst emission condition found by the preliminary test.

The equipment and cables are arranged or manipulated within the range of the test standard in the above condition.

At least six highest spectrum are measured by the test receiver (quasi-peak) and the spectrum analyzer or the test receiver (peak).

38dB Rejection test

Schema for the 38dB rejection measurement

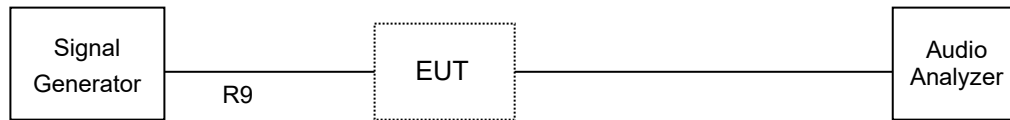

[Preliminary Measurement]

The Signal Generator conditions :

Output level = 66 dBuV + SG Reference Level (the worst case sensitivity)

Modulation = Frequency modulated to 1 kHz tone at 3 kHz peak deviation.

Frequency Points = 824.040 MHz, 836.505 MHz, 848.970 MHz

869.040 MHz, 881.505 MHz, 893.970 MHz

(The Cellular Radiotelephone Service mobile and base frequency bands)

The EUT condition :

Scanning Frequency = 0.1 – 60 MHz (Minimum Scan Step).

Scan stopped point, was the detected frequency.

[Final Measurement]

Injected 12dB SINAD Reading (SG RF Output)

The EUT condition :

Frequency = Scan stopped point

The Signal Generator condition :

Frequency = Cellular point

Detected 12dB SINAD Reading (SG RF Output)

The EUT condition :

Frequency = Scan stopped point

The Signal Generator condition :

Frequency = Scan stopped point

Under the requirements of Section 15.121(b) of the Rule.

Injected 12dB SINAD Reading – Detected 12dB SINAD Reading = 38 dB or more.