



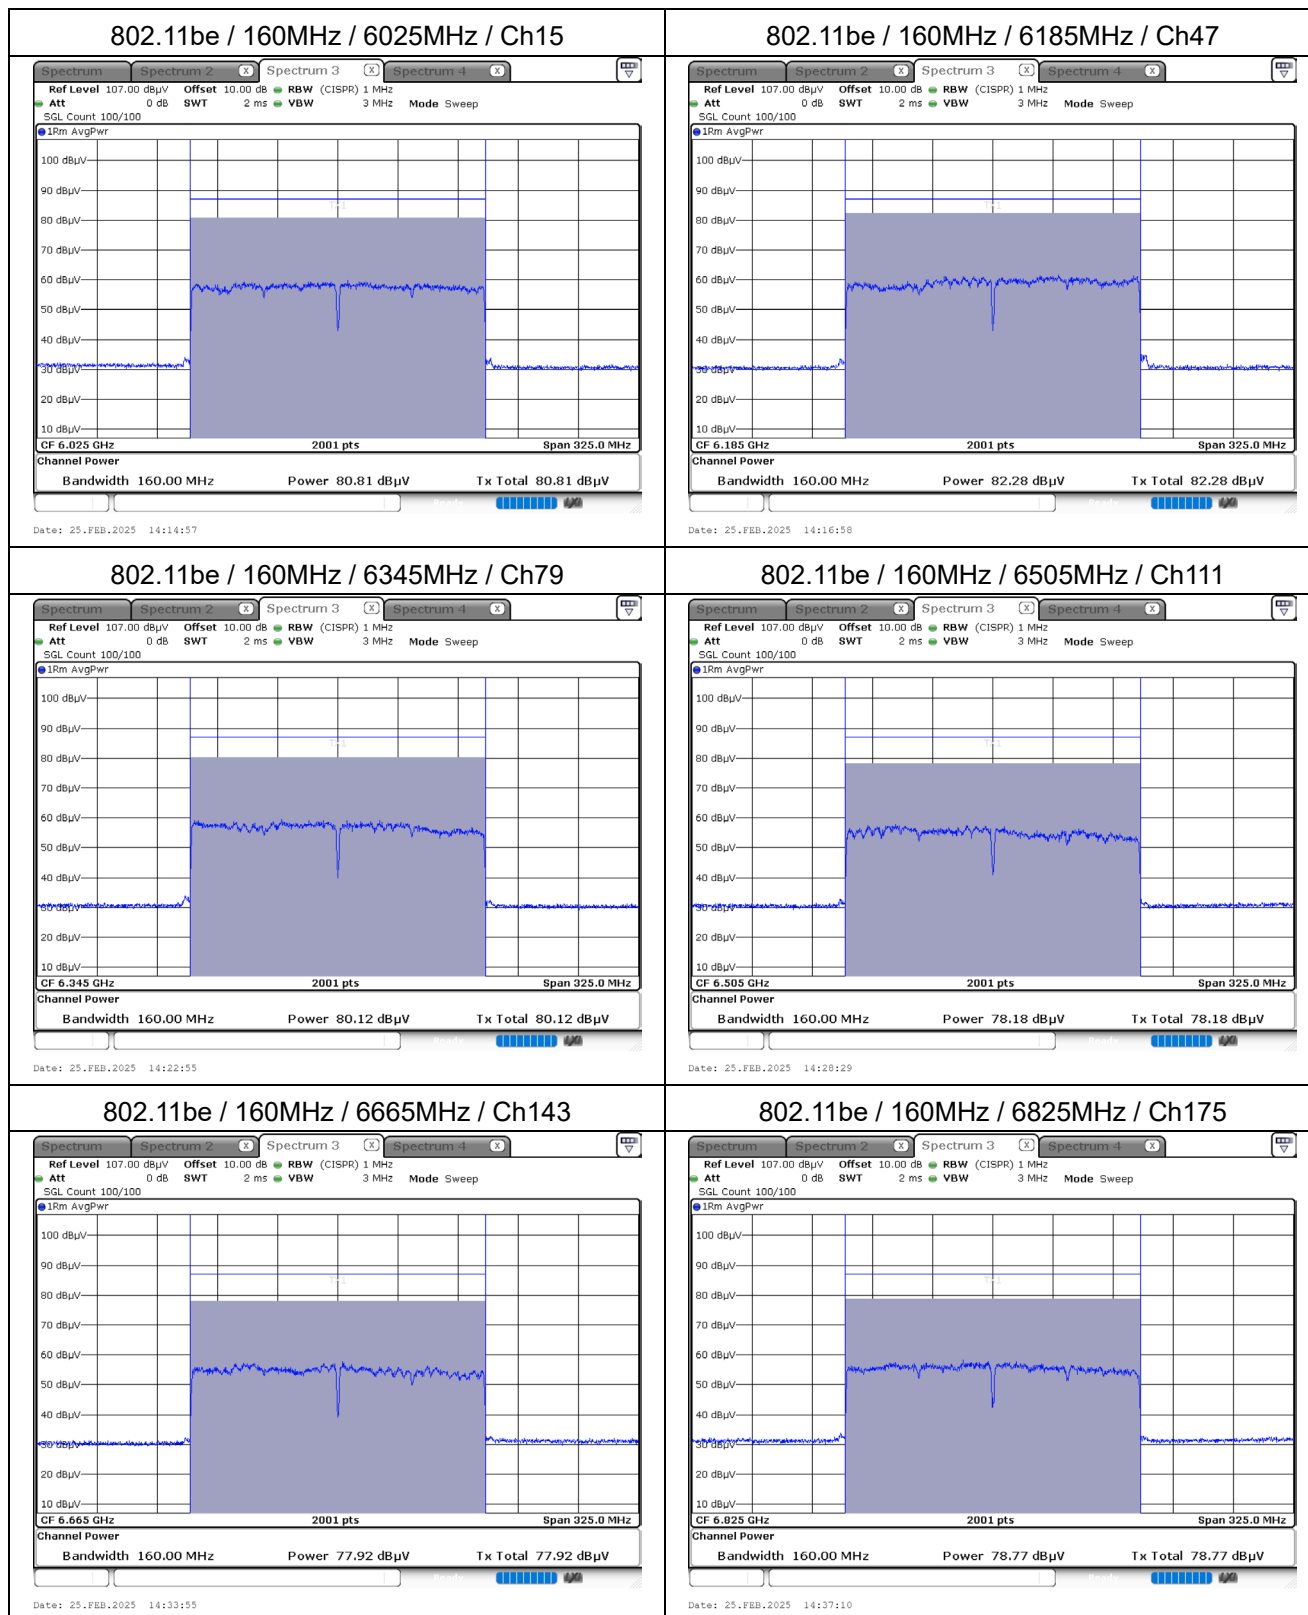

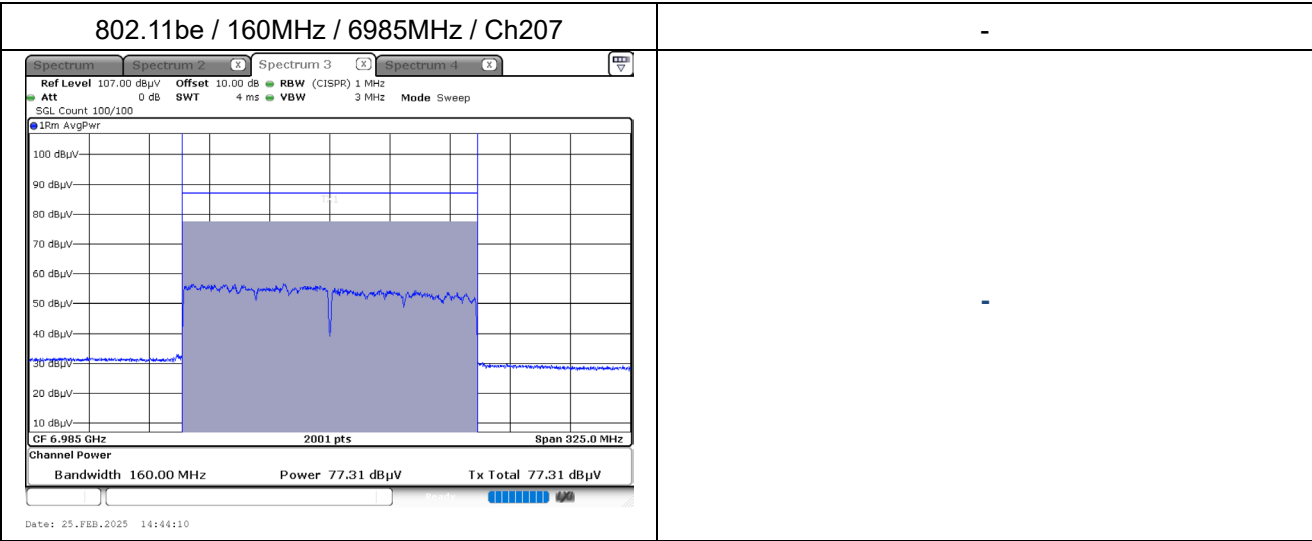

Appendix D. Test Result of Maximum E.I.R.P. Power Spectral Density

802.11be (20 MHz)

Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Duty Factor (dB)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Result
5955	69.120	22.930	2.07	95.23	-1.11	-1.000	Pass
6195	68.050	24.030	2.07	95.23	-1.08	-1.000	Pass
6415	66.910	25.130	2.07	95.23	-1.12	-1.000	Pass
6435	66.770	25.230	2.07	95.23	-1.16	-1.000	Pass
6475	66.540	25.430	2.07	95.23	-1.19	-1.000	Pass
6515	66.510	25.560	2.07	95.23	-1.09	-1.000	Pass
6535	66.480	25.580	2.07	95.23	-1.10	-1.000	Pass
6695	66.260	25.750	2.07	95.23	-1.15	-1.000	Pass
6855	66.140	25.920	2.07	95.23	-1.10	-1.000	Pass
6875 (U-NII 7~8)	66.130	25.950	2.07	95.23	-1.08	-1.000	Pass
6895	66.110	25.940	2.07	95.23	-1.11	-1.000	Pass
7015	65.930	26.110	2.07	95.23	-1.12	-1.000	Pass
7115	65.030	26.300	2.07	95.23	-1.83	-1.000	Pass

802.11be (40 MHz)

Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Duty Factor (dB)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Result
5965	66.080	22.960	2.07	95.23	-4.12	-1.000	Pass
6205	66.240	24.080	2.07	95.23	-2.84	-1.000	Pass
6405	63.890	25.080	2.07	95.23	-4.19	-1.000	Pass
6445	64.080	25.270	2.07	95.23	-3.81	-1.000	Pass
6485	64.020	25.470	2.07	95.23	-3.67	-1.000	Pass
6525 (U-NII-6~7)	63.750	25.570	2.07	95.23	-3.84	-1.000	Pass
6565	63.150	25.610	2.07	95.23	-4.40	-1.000	Pass
6725	63.260	25.790	2.07	95.23	-4.11	-1.000	Pass
6845	63.450	25.910	2.07	95.23	-3.80	-1.000	Pass
6885 (U-NII-7~8)	63.700	25.950	2.07	95.23	-3.51	-1.000	Pass
6925	63.680	25.990	2.07	95.23	-3.49	-1.000	Pass
7005	62.400	26.080	2.07	95.23	-4.68	-1.000	Pass
7085	61.810	26.230	2.07	95.23	-5.12	-1.000	Pass


802.11be (80 MHz)

Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Duty Factor (dB)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Result
5985	62.620	23.010	2.073	95.20	-7.50	-1.000	Pass
6225	63.670	24.180	2.073	95.20	-5.28	-1.000	Pass
6385	61.230	24.980	2.073	95.20	-6.92	-1.000	Pass
6465	61.010	25.370	2.073	95.20	-6.75	-1.000	Pass
6545 (U-NII-6~7)	60.720	25.590	2.073	95.20	-6.82	-1.000	Pass
6625	60.650	25.670	2.073	95.20	-6.81	-1.000	Pass
6705	60.760	25.780	2.073	95.20	-6.59	-1.000	Pass
6785	60.980	25.850	2.073	95.20	-6.30	-1.000	Pass
6865 (U-NII-7~8)	60.620	25.940	2.073	95.20	-6.57	-1.000	Pass
6945	60.300	26.020	2.073	95.20	-6.81	-1.000	Pass
7025	58.320	26.120	2.073	95.20	-8.69	-1.000	Pass

802.11be (160 MHz)


Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Duty Factor (dB)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Result
6025	60.200	23.180	2.073	95.20	-9.75	-1.000	Pass
6185	61.430	23.990	2.073	95.20	-7.71	-1.000	Pass
6345	59.460	24.780	2.073	95.20	-8.89	-1.000	Pass
6505 (U-NII-6~7)	58.150	25.550	2.073	95.20	-9.43	-1.000	Pass
6665	57.840	25.720	2.073	95.20	-9.57	-1.000	Pass
6825 (U-NII-7~8)	58.290	25.980	2.073	96.20	-9.86	-1.000	Pass
6985	57.320	26.060	2.073	95.20	-9.75	-1.000	Pass

802.11be / 20MHz / 5955MHz / Ch1

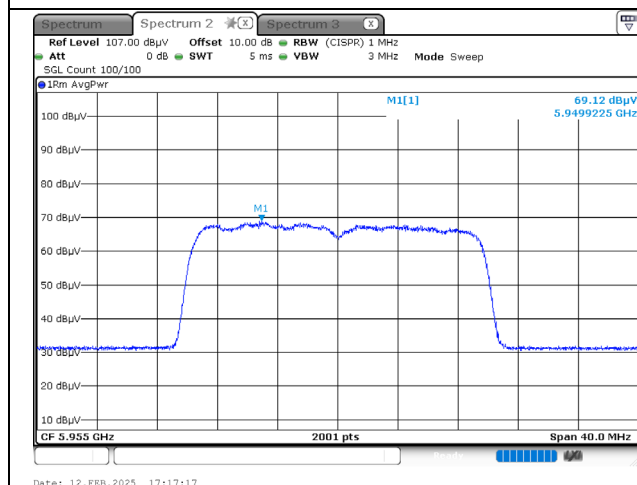


Date: 12.FEB.2025 17:17:17

802.11be / 20MHz / 6195MHz / Ch49

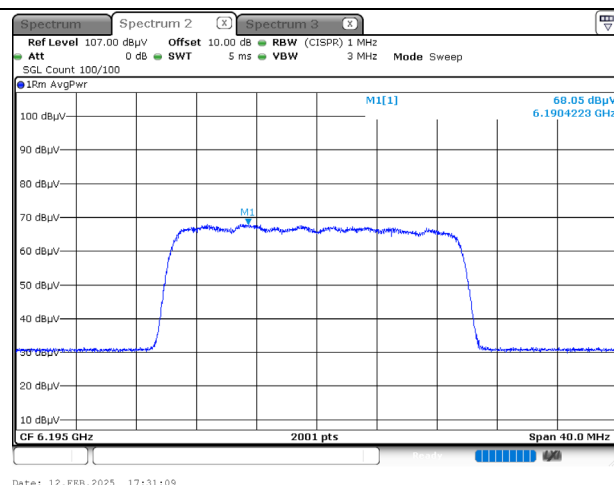


Date: 12.FEB.2025 17:31:09

802.11be / 20MHz / 6415MHz / Ch93

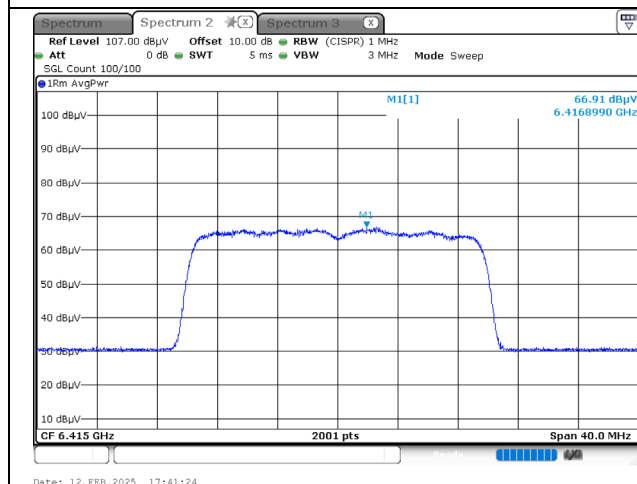


Date: 12.FEB.2025 17:41:24

802.11be / 20MHz / 6435MHz / Ch97

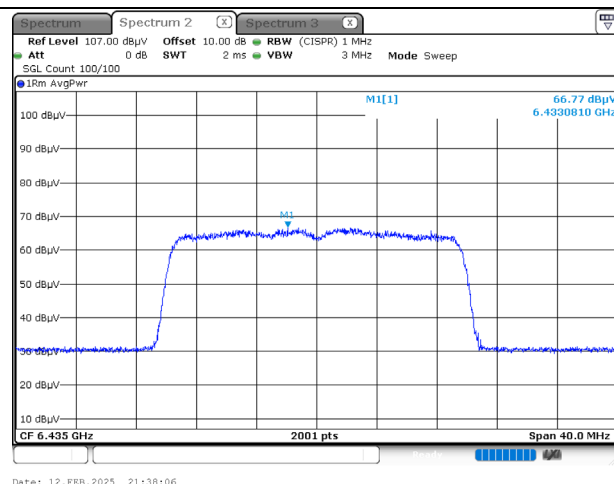


Date: 12.FEB.2025 21:38:06

802.11be / 20MHz / 6475MHz / Ch105

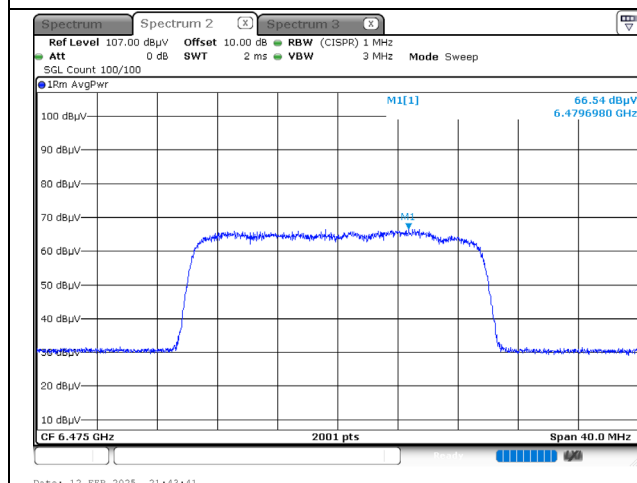


Date: 12.FEB.2025 21:43:41

802.11be / 20MHz / 6515MHz / Ch113

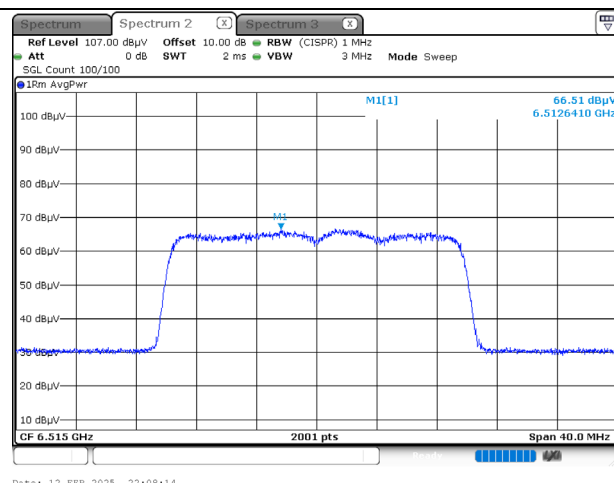


Date: 12.FEB.2025 22:08:14

802.11be / 20MHz / 6535MHz / Ch117

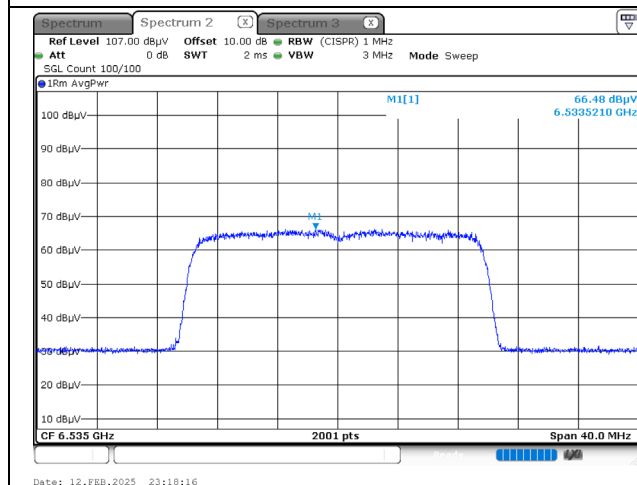


Date: 12.FEB.2025 23:18:16

802.11be / 20MHz / 6695MHz / Ch149

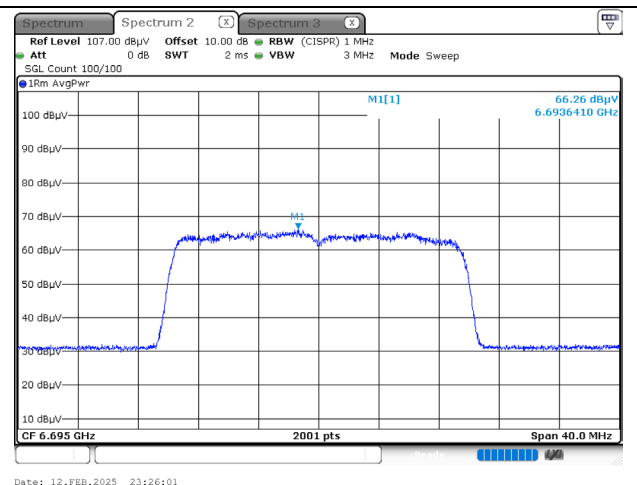


Date: 12.FEB.2025 23:26:01

802.11be / 20MHz / 6855MHz / Ch181

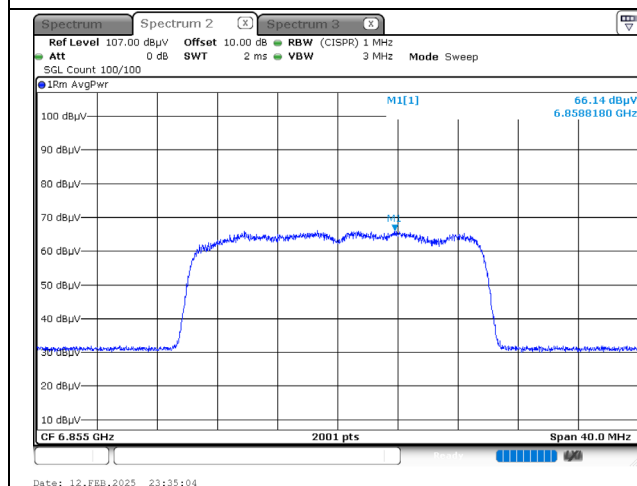


Date: 12.FEB.2025 23:35:04

802.11be / 20MHz / 6875MHz / Ch185

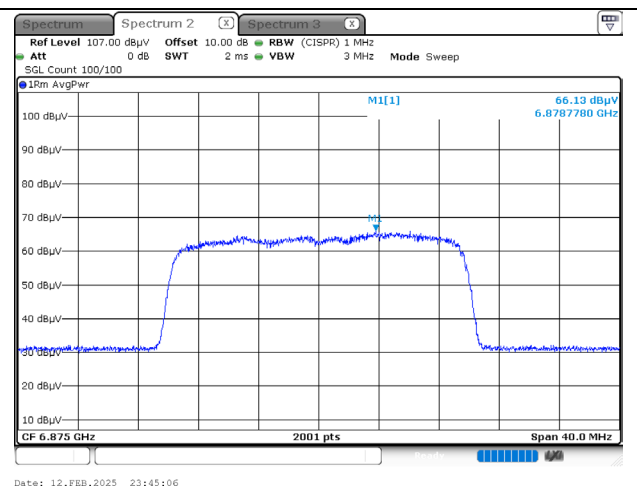


Date: 12.FEB.2025 23:45:06

802.11be / 20MHz / 6895MHz / Ch189

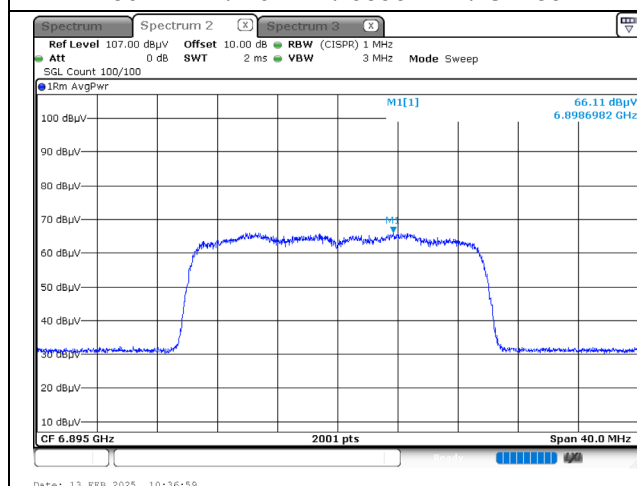


Date: 13.FEB.2025 10:36:59

802.11be / 20MHz / 7015MHz / Ch213

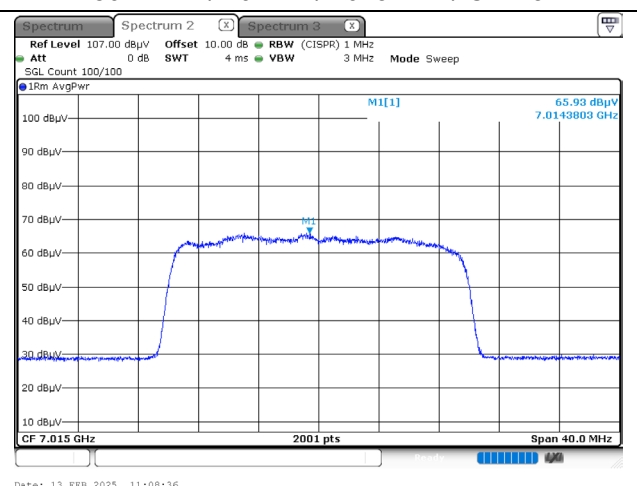


Date: 13.FEB.2025 11:08:36

802.11be / 20MHz / 7115MHz / Ch233

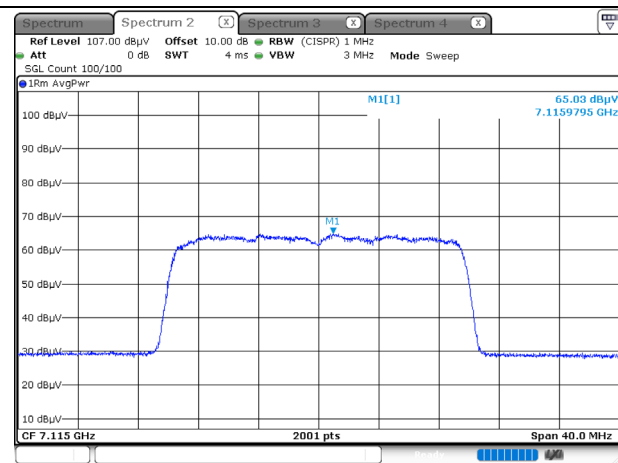


Date: 25.FEB.2025 10:08:02

802.11be / 40MHz / 5965MHz / Ch3

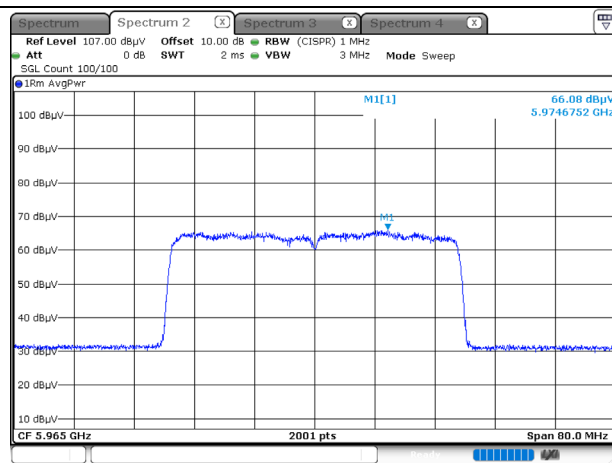


Date: 25.FEB.2025 10:19:02

802.11be / 40MHz / 6205MHz / Ch51

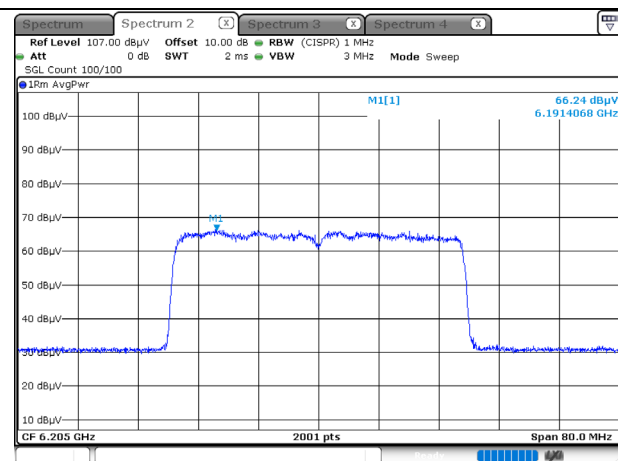


Date: 25.FEB.2025 10:24:43

802.11be / 40MHz / 6405MHz / Ch91

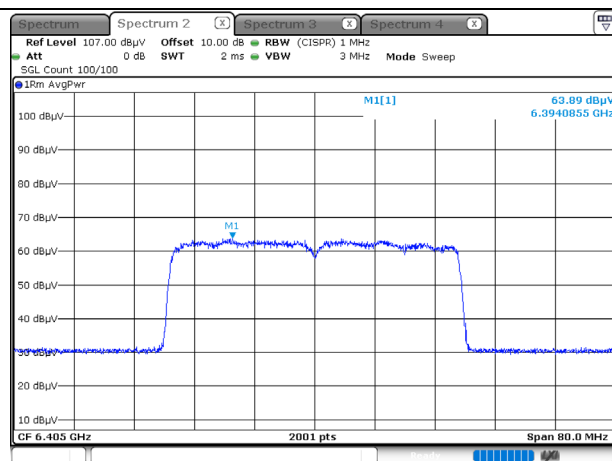


Date: 25.FEB.2025 10:37:42

802.11be / 40MHz / 6445MHz / Ch99

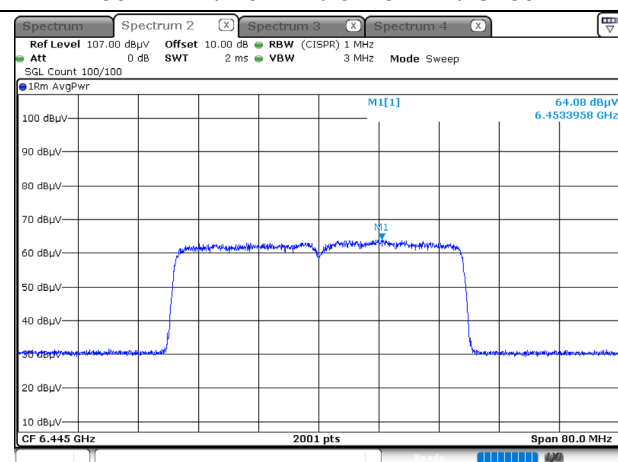


Date: 25.FEB.2025 10:42:07

802.11be / 40MHz / 6485MHz / Ch107

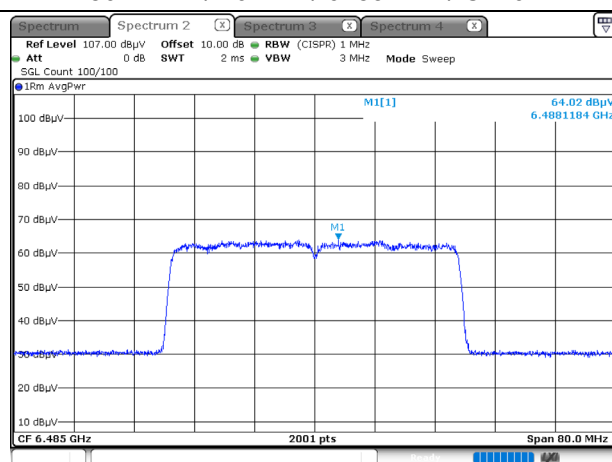


Date: 25.FEB.2025 10:48:10

802.11be / 40MHz / 6525MHz / Ch115

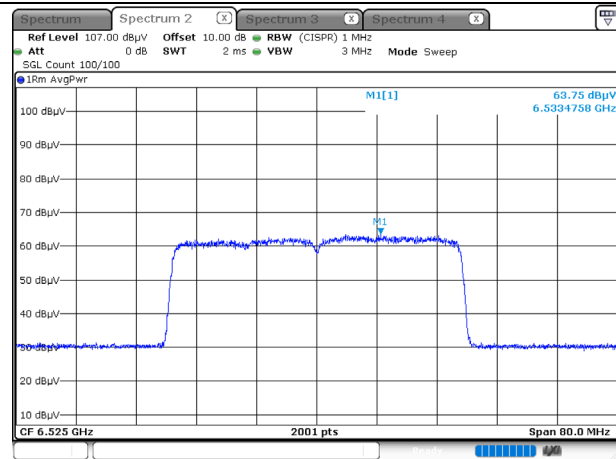


Date: 25.FEB.2025 10:51:45

802.11be / 40MHz / 6565MHz / Ch123

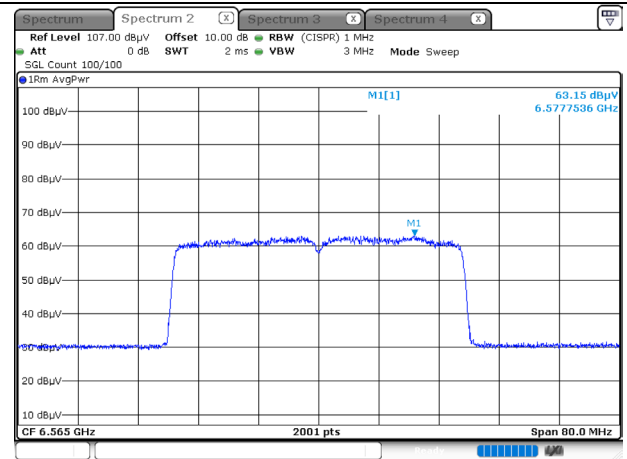


Date: 25.FEB.2025 11:03:48

802.11be / 40MHz / 6725MHz / Ch155

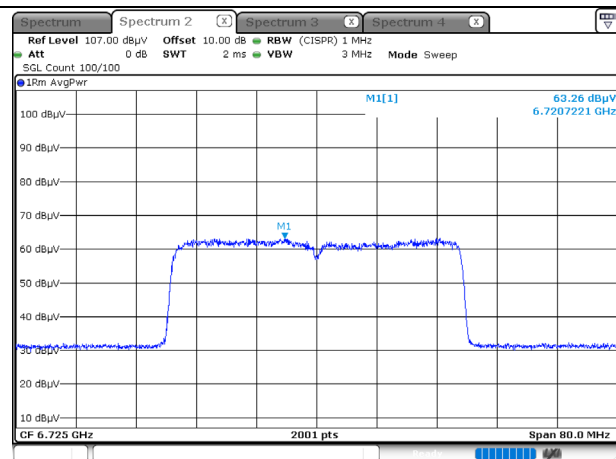


Date: 25.FEB.2025 11:09:38

802.11be / 40MHz / 6845MHz / Ch179

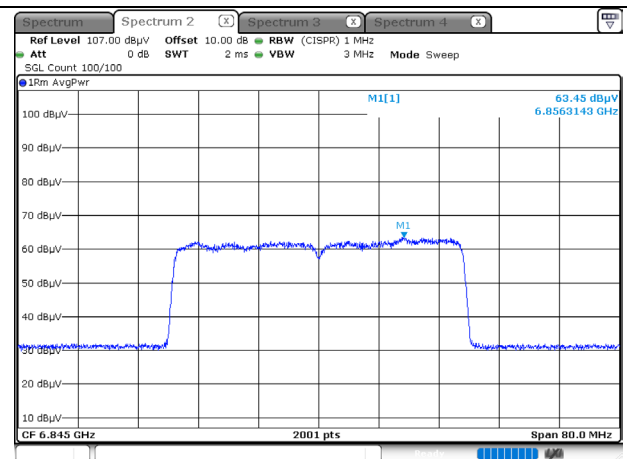


Date: 25.FEB.2025 11:11:48

802.11be / 40MHz / 6885MHz / Ch187

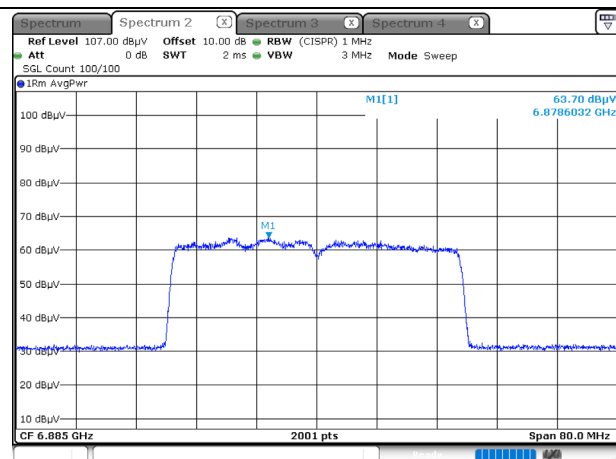


Date: 25.FEB.2025 11:16:43

802.11be / 40MHz / 6925MHz / Ch195

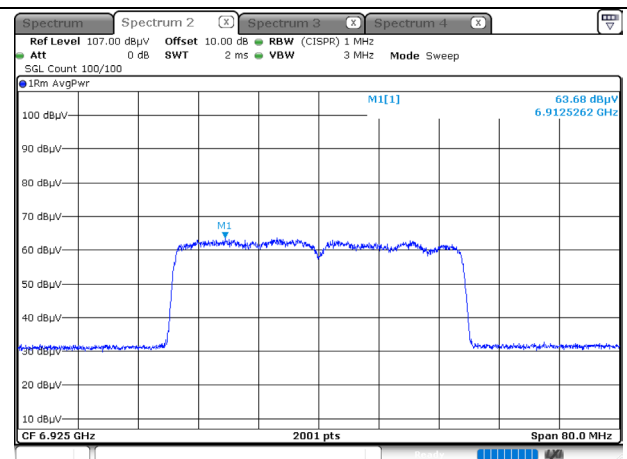


Date: 25.FEB.2025 11:22:57

802.11be / 40MHz / 7005MHz / Ch211

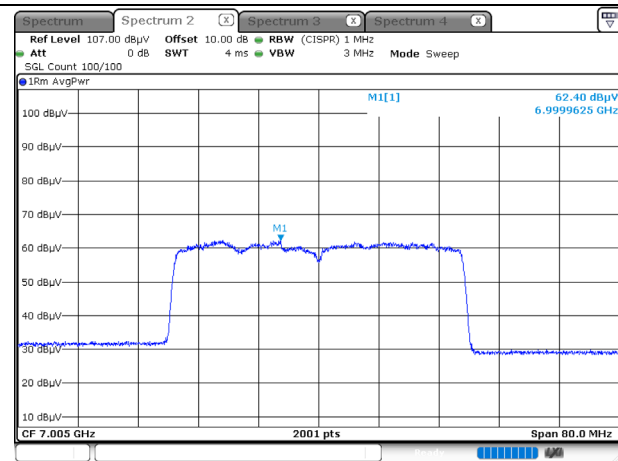


Date: 25.FEB.2025 11:30:50

802.11be / 40MHz / 7085MHz / Ch227

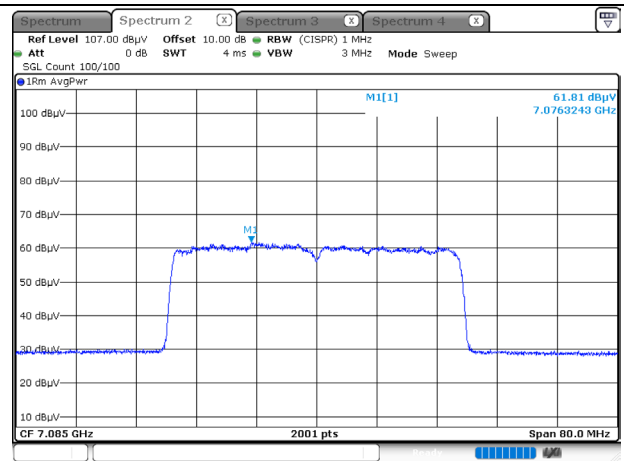


Date: 25.FEB.2025 11:39:43

802.11be / 80MHz / 5985MHz / Ch7

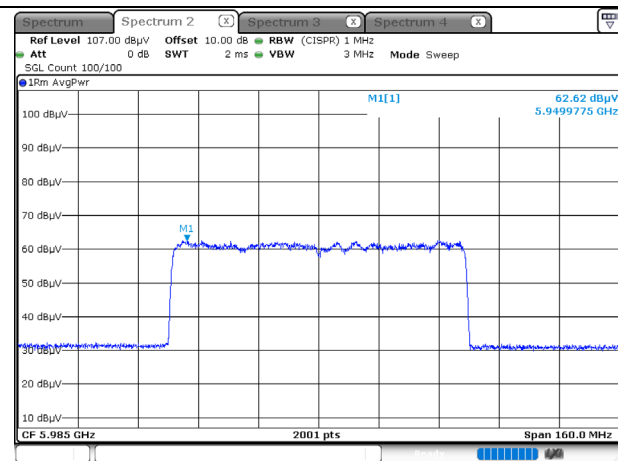


Date: 25.FEB.2025 13:06:39

802.11be / 80MHz / 6225MHz / Ch55

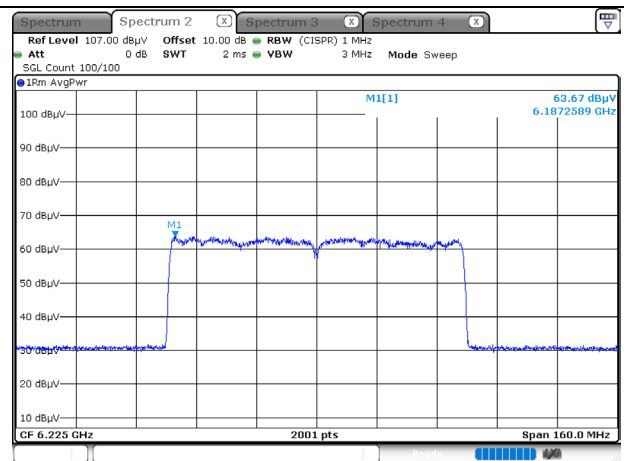


Date: 25.FEB.2025 13:09:31

802.11be / 80MHz / 6385MHz / Ch87

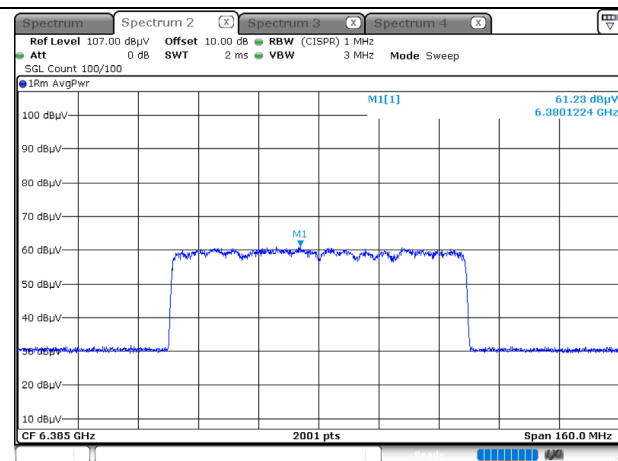


Date: 25.FEB.2025 13:18:08

802.11be / 80MHz / 6465MHz / Ch103

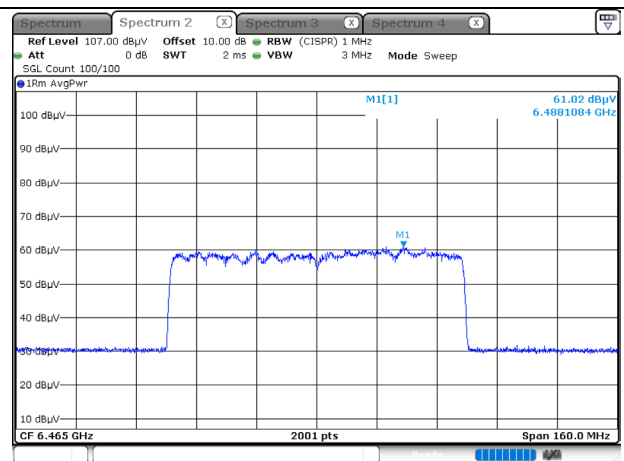


Date: 25.FEB.2025 13:25:03

802.11be / 80MHz / 6545MHz / Ch119

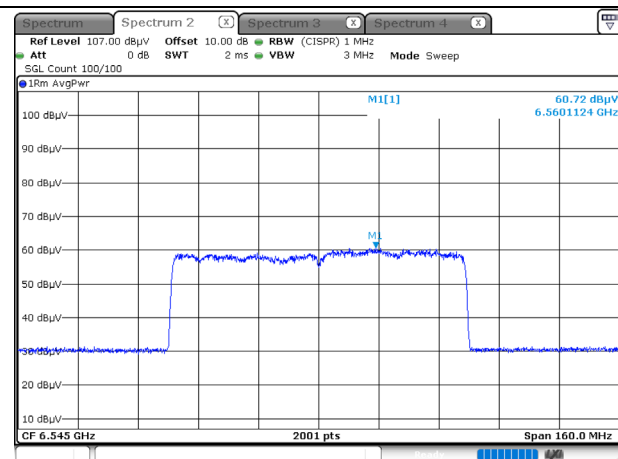


Date: 25.FEB.2025 13:36:20

802.11be / 80MHz / 6625MHz / Ch135

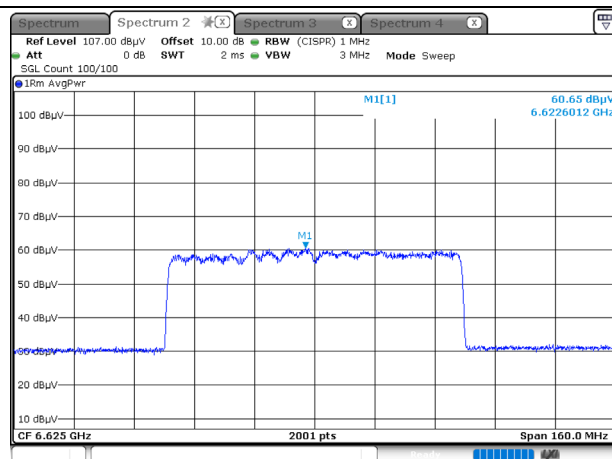


Date: 25.FEB.2025 13:38:21

802.11be / 80MHz / 6705MHz / Ch151

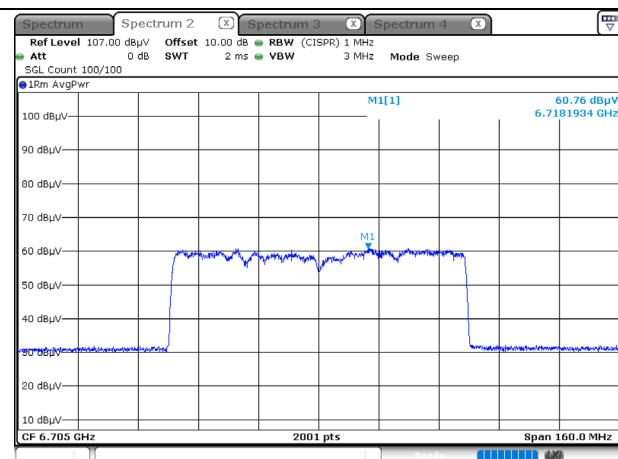


Date: 25.FEB.2025 13:41:29

802.11be / 80MHz / 6785MHz / Ch167

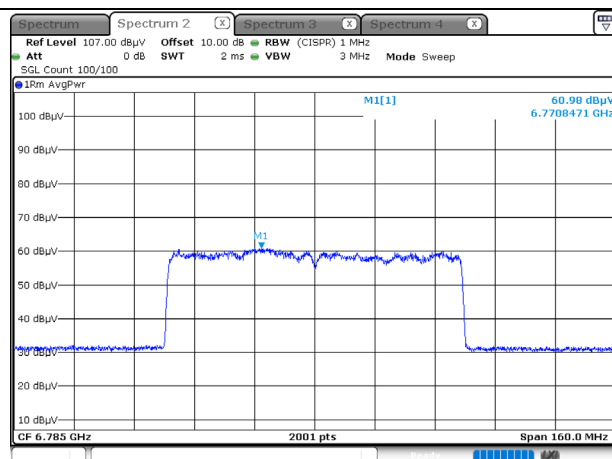


Date: 25.FEB.2025 13:43:27

802.11be / 80MHz / 6865MHz / Ch183

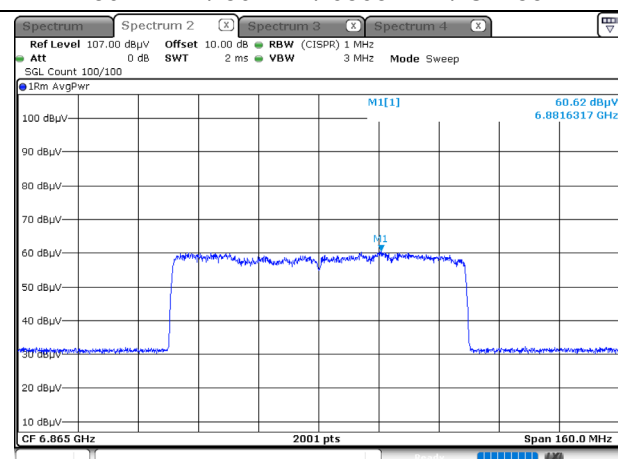


Date: 25.FEB.2025 13:50:52

802.11be / 80MHz / 6945MHz / Ch199

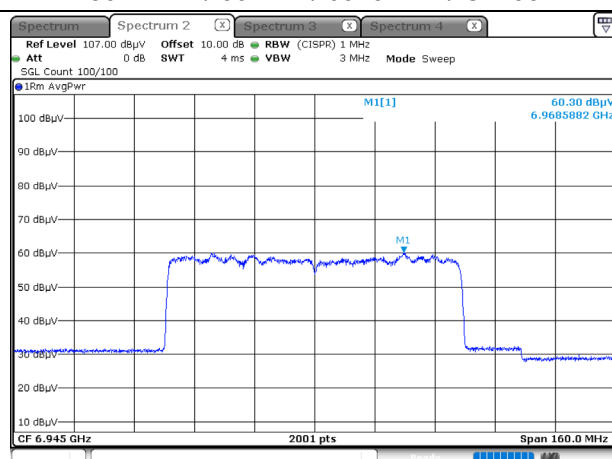


Date: 25.FEB.2025 14:04:36

802.11be / 80MHz / 7025MHz / Ch215

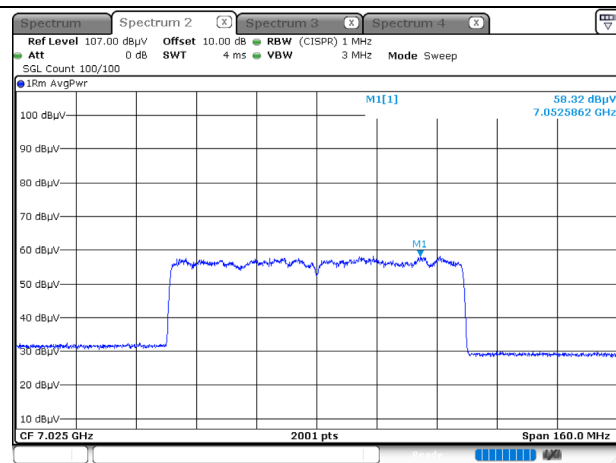


Date: 25.FEB.2025 14:09:23

802.11be / 160MHz / 6025MHz / Ch15

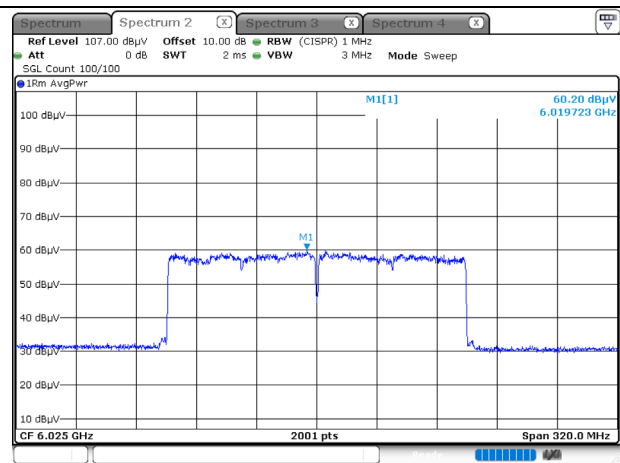


Date: 25.FEB.2025 14:14:08

802.11be / 160MHz / 6185MHz / Ch47

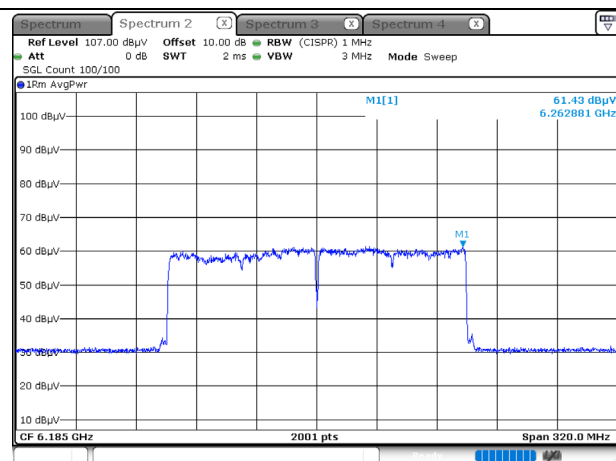


Date: 25.FEB.2025 14:16:22

802.11be / 160MHz / 6345MHz / Ch79

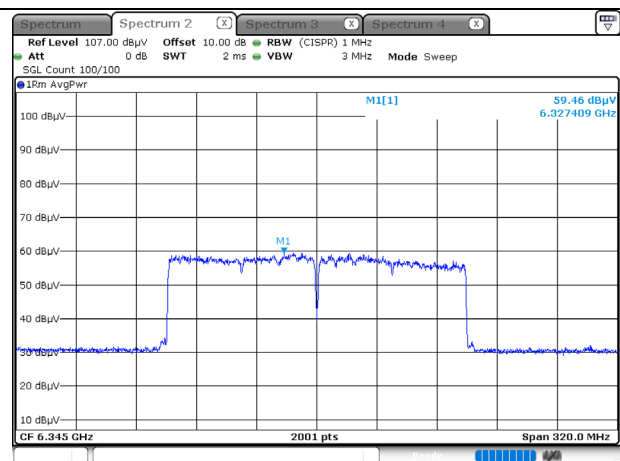


Date: 25.FEB.2025 14:22:27

802.11be / 160MHz / 6505MHz / Ch111

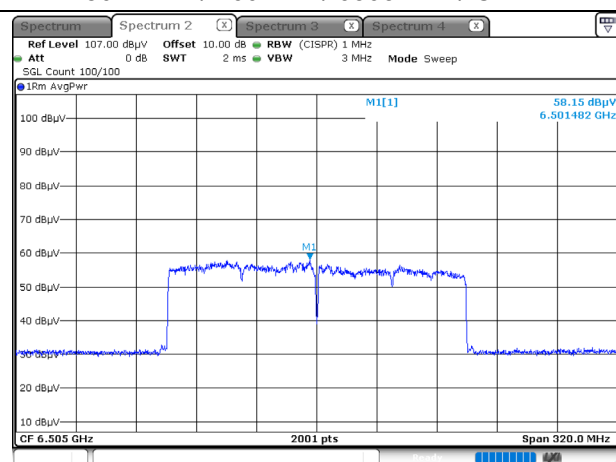


Date: 25.FEB.2025 14:27:42

802.11be / 160MHz / 6665MHz / Ch143

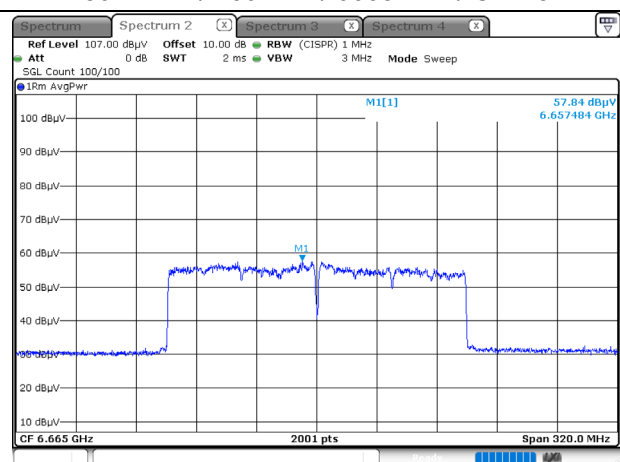


Date: 25.FEB.2025 14:33:25

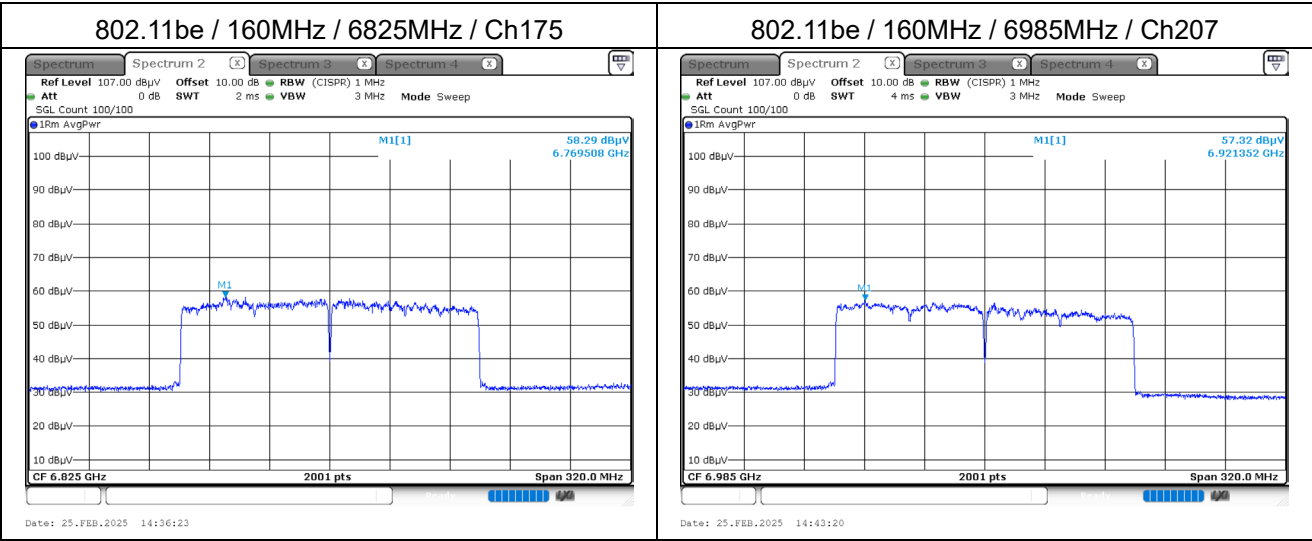

Appendix E. Test Result of Transmitter Radiated Spurious Emission

30 MHz ~ 1 GHz

Site :HC-CB04
Condition :3m Horizontal
Mode :WIFI 6G_TX_LF
Test By :Ling Chen

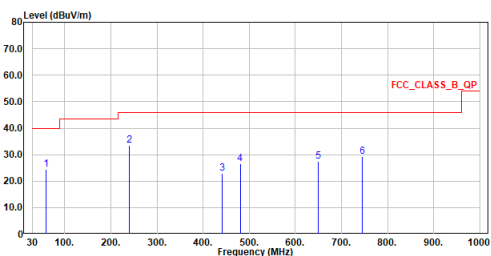


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	59.100	24.48	40.00	-15.52	27.45	-2.97	QP
2	240.005	33.61	46.00	-12.39	38.34	-4.73	QP
3	441.474	23.05	46.00	-22.95	21.92	1.13	QP
4	480.274	26.53	46.00	-19.47	24.74	1.79	QP
5	650.121	27.54	46.00	-18.46	22.19	5.35	QP
6	745.181	29.34	46.00	-16.66	22.12	7.22	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :WIFI 6G_TX_LF
Test By :Ling Chen

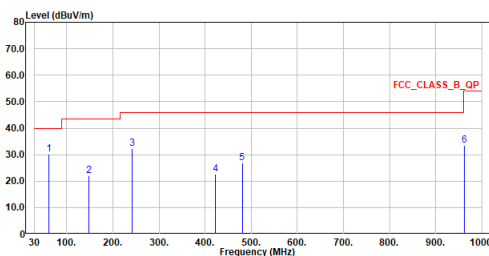


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	60.846	30.12	40.00	-9.88	33.28	-3.16	QP
2	148.437	22.11	43.50	-21.39	25.30	-3.19	QP
3	240.878	32.40	46.00	-13.60	37.08	-4.68	QP
4	421.492	22.54	46.00	-23.46	22.19	0.35	QP
5	480.274	27.01	46.00	-18.99	25.22	1.79	QP
6	962.461	33.59	54.00	-20.41	23.80	9.79	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5955MHz
Test By :Ling Chen

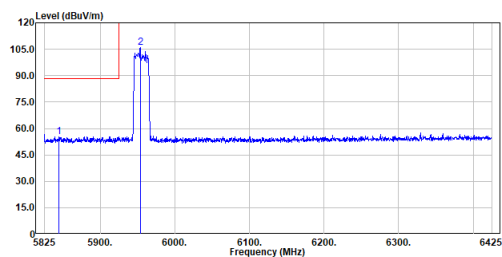


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5844.500	55.45	88.20	-32.75	32.84	22.61	Peak
2	5953.400	105.82	-----	-----	82.89	22.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be20_TX_5955MHz
Test By :Ling Chen

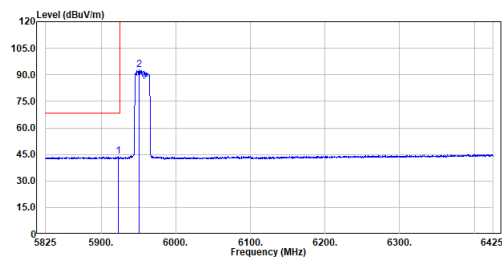


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5922.500	43.99	68.20	-24.21	21.16	22.83	Average
2	5950.700	92.99	-----	-----	70.07	22.92	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5955MHz
Test By :Ling Chen

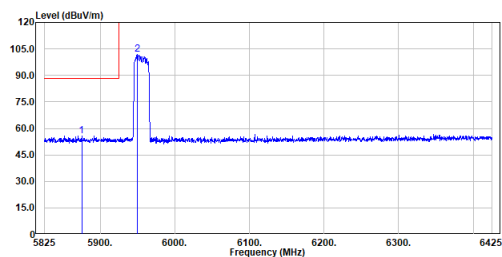


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5874.800	55.91	88.20	-32.29	33.22	22.69	Peak
2	5949.500	101.96	-----	-----	79.04	22.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be20_TX_5955MHz
Test By :Ling Chen

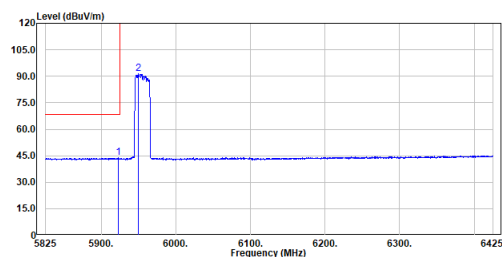


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5922.500	43.79	68.20	-24.41	20.96	22.83	Average
2	5949.500	91.33	-----	-----	68.41	22.92	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_5955MHz
Test By :Cyril Chen

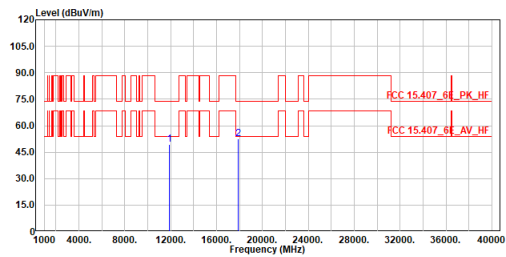


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11910.000	49.48	74.00	-24.52	55.36	-5.88	Peak
2	17865.000	52.32	74.00	-21.68	54.66	-2.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_5955MHz
Test By :Cyril Chen

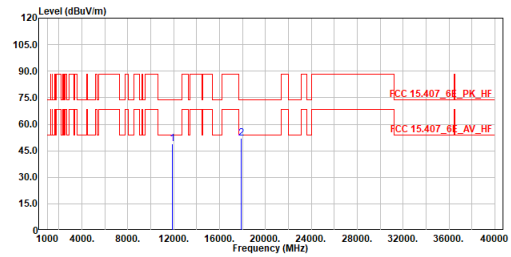


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11910.000	49.05	74.00	-24.95	54.93	-5.88	Peak
2	17865.000	52.06	74.00	-21.94	54.40	-2.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_6195MHz
Test By :Cyril Chen

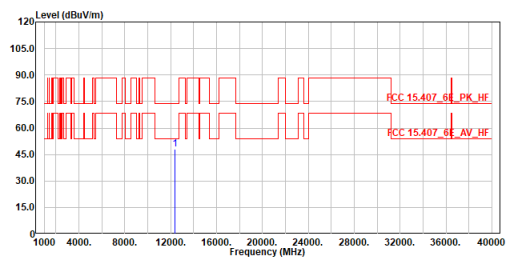


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	12390.000	47.90	74.00	-26.10	53.35	-5.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_6195MHz
Test By :Cyril Chen

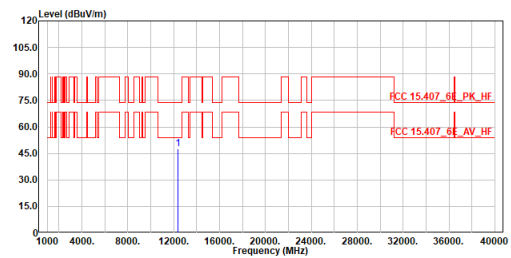


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	12390.000	47.59	74.00	-26.41	53.04	-5.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_6415MHz
Test By :Cyril Chen

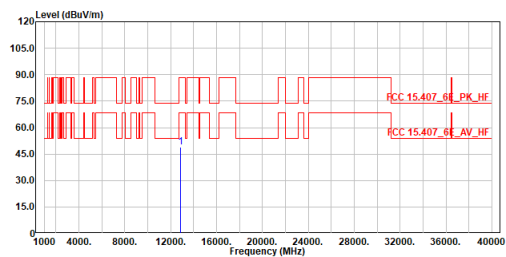


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	12830.000	48.97	88.20	-39.23	53.66	-4.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_6415MHz
Test By :Cyril Chen

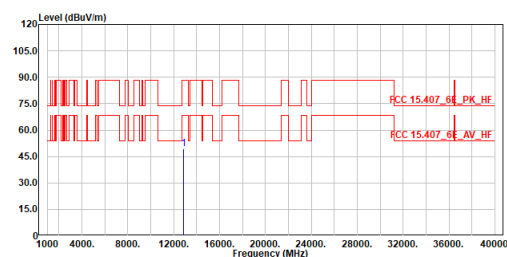


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	12830.000	49.39	88.20	-38.81	54.08	-4.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_6435MHz
Test By :Cyril Chen

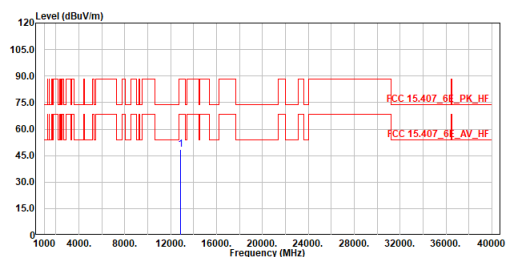


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	12870.000	48.63	88.20	-39.57	53.23	-4.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_6435MHz
Test By :Cyril Chen

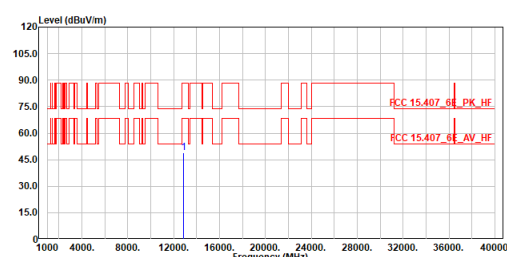


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	12870.000	48.86	88.20	-39.34	53.46	-4.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_6475MHz
Test By :Cyril Chen

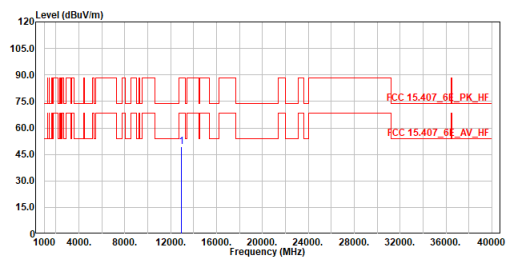


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	12950.000	49.21	88.20	-38.99	53.66	-4.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_6475MHz
Test By :Cyril Chen

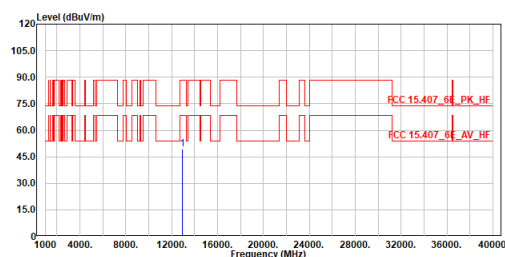


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	12950.000	49.26	88.20	-38.94	53.71	-4.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_6515MHz
Test By :Cyril Chen

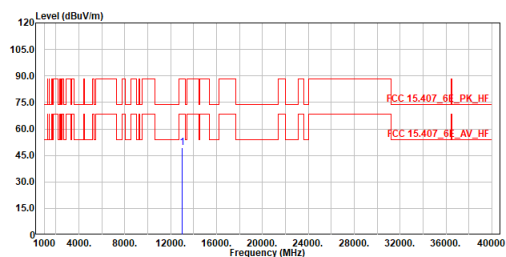


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	13030.000	49.46	88.20	-38.74	53.81	-4.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_6515MHz
Test By :Cyril Chen

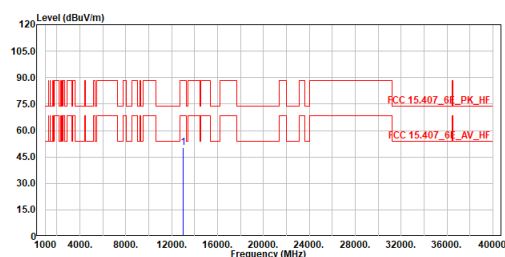


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	13030.000	50.07	88.20	-38.13	54.42	-4.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_6535MHz
Test By :Cyril Chen

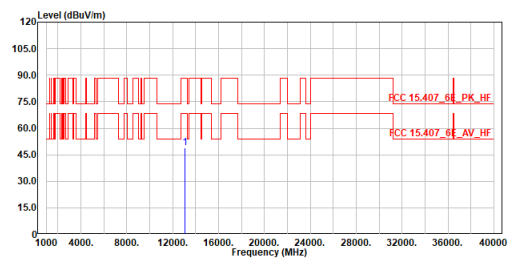


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	13070.000	48.73	88.20	-39.47	53.07	-4.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_6535MHz
Test By :Cyril Chen

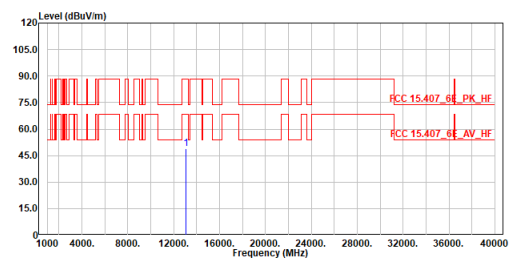


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	13070.000	48.77	88.20	-39.43	53.11	-4.34	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_6695MHz
Test By :Cyril Chen

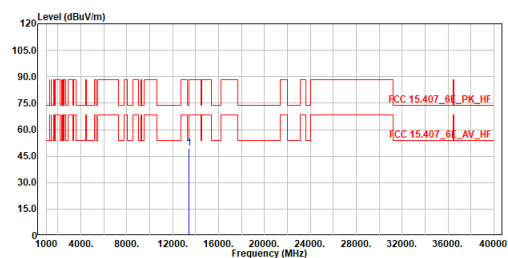


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	13390.000	49.42	74.00	-24.58	53.71	-4.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_6695MHz
Test By :Cyril Chen

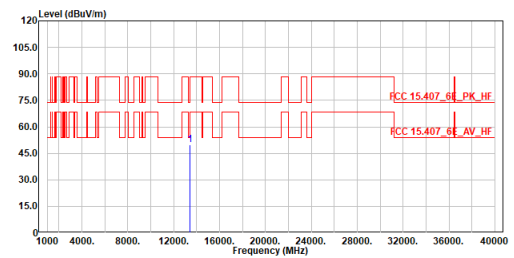


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	13390.000	49.75	74.00	-24.25	54.04	-4.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_6855MHz
Test By :Cyril Chen

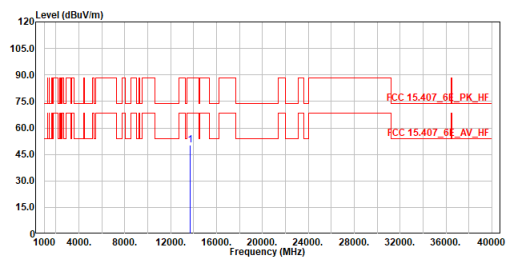


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	13710.000	50.34	88.20	-37.86	54.25	-3.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_6855MHz
Test By :Cyril Chen

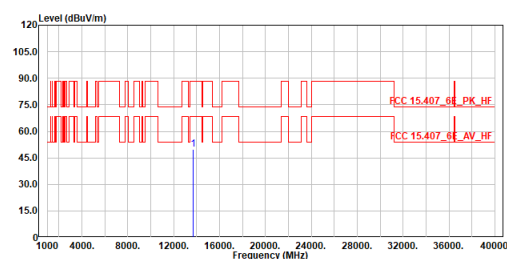


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	13710.000	49.71	88.20	-38.49	53.62	-3.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_6875MHz
Test By :Cyril Chen

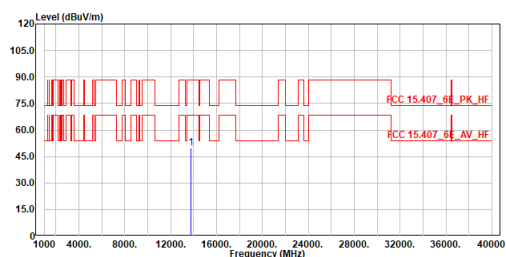


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	13750.000	49.71	88.20	-38.49	53.56	-3.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_6875MHz
Test By :Cyril Chen

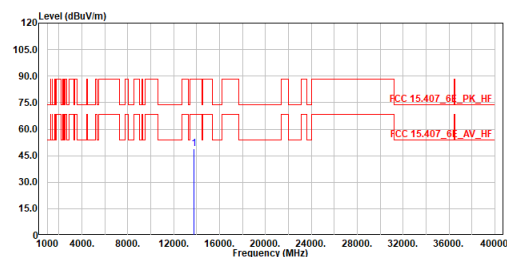


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	13750.000	48.92	88.20	-39.28	52.77	-3.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_6895MHz
Test By :Cyril Chen

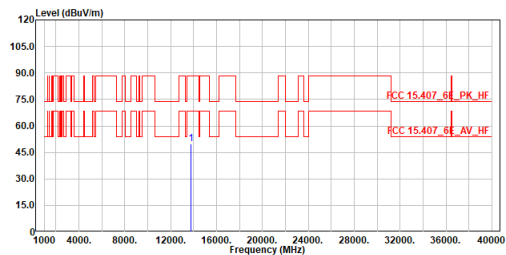

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	13790.000	49.69	88.20	-38.51	53.47	-3.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_6895MHz
Test By :Cyril Chen

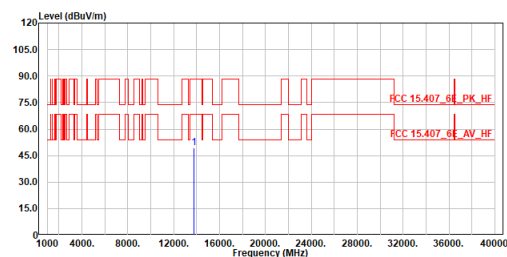

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	13790.000	49.31	88.20	-38.89	53.09	-3.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_7015MHz
Test By :Cyril Chen

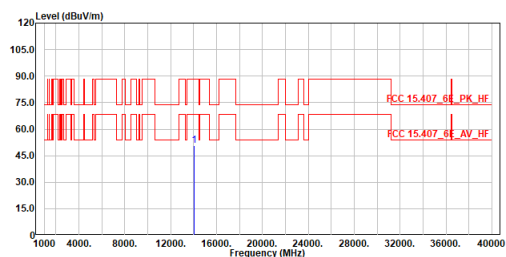

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	14030.000	50.66	88.20	-37.54	54.04	-3.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_7015MHz
Test By :Cyril Chen

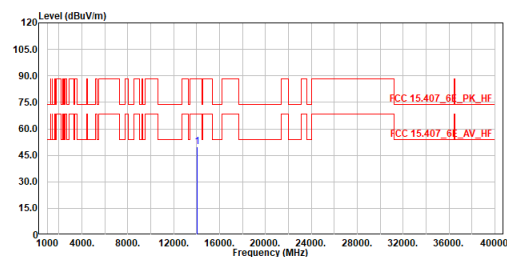

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	14030.000	49.99	88.20	-38.21	53.37	-3.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_7115MHz
Test By :Ling Chen

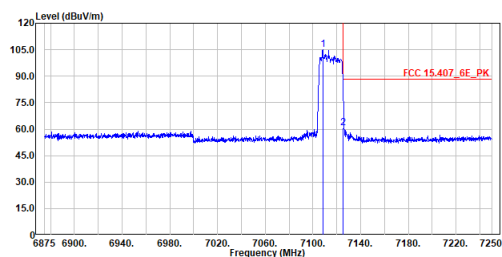


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	7108.250	105.05	-----	-----	78.76	26.29	Peak
2	7125.125	60.64	88.20	-27.56	34.31	26.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be20_TX_7115MHz
Test By :Ling Chen

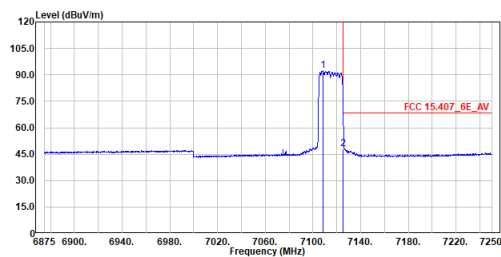


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	7108.438	92.35	-----	-----	66.06	26.29	Average
2	7125.125	48.08	68.20	-20.12	21.75	26.33	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_7115MHz
Test By :Ling Chen

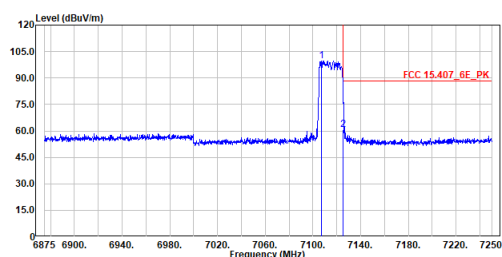


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	7107.313	99.80	-----	-----	73.51	26.29	Peak
2	7125.125	60.59	88.20	-27.61	34.26	26.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be20_TX_7115MHz
Test By :Ling Chen

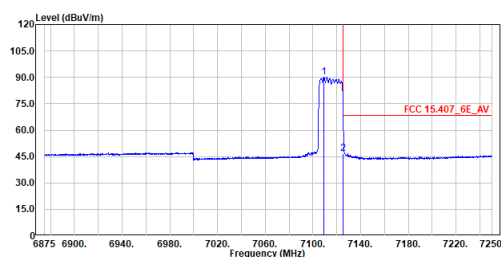


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	7109.375	90.19	-----	-----	63.90	26.29	Average
2	7125.125	46.42	68.20	-21.78	20.09	26.33	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_7115MHz
Test By :Cyril Chen

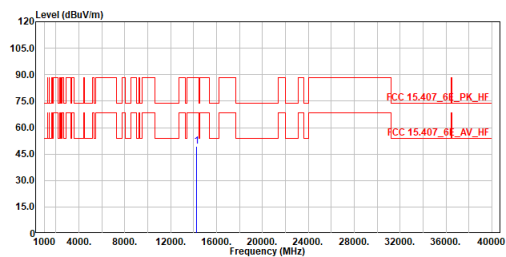


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	14230.000	49.35	88.20	-38.85	52.50	-3.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_7115MHz
Test By :Cyril Chen

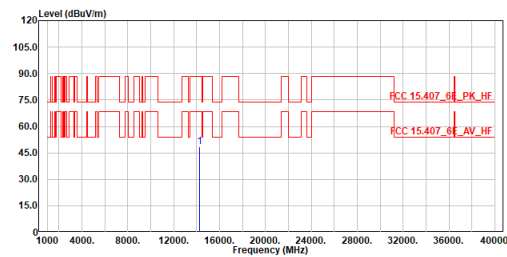


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	14230.000	48.61	88.20	-39.59	51.76	-3.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_5965MHz
Test By :Ling Chen

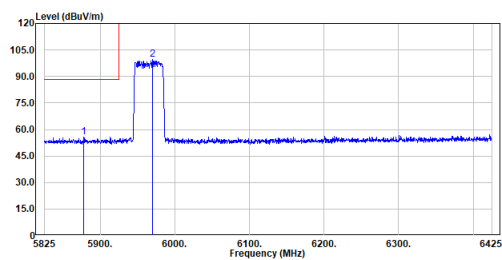


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5877.800	55.75	88.20	-32.45	33.05	22.70	Peak
2	5969.600	99.42	-----	-----	76.44	22.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be40_TX_5965MHz
Test By :Ling Chen

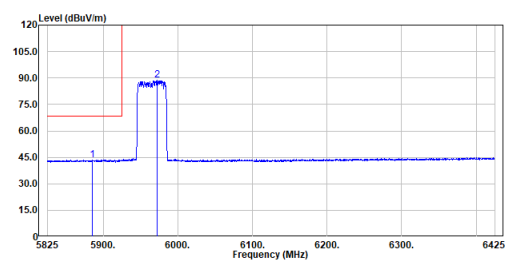


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5884.700	43.57	68.20	-24.63	20.85	22.72	Average
2	5972.000	88.89	-----	-----	65.91	22.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_5965MHz
Test By :Ling Chen

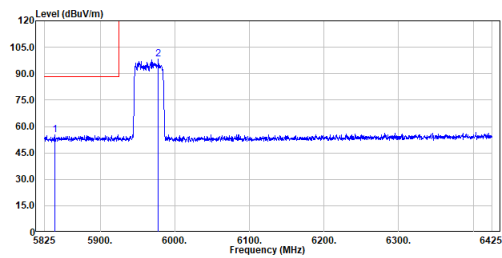


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5838.500	55.30	88.20	-32.90	32.71	22.59	Peak
2	5977.700	98.11	-----	-----	75.11	23.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be40_TX_5965MHz
Test By :Ling Chen

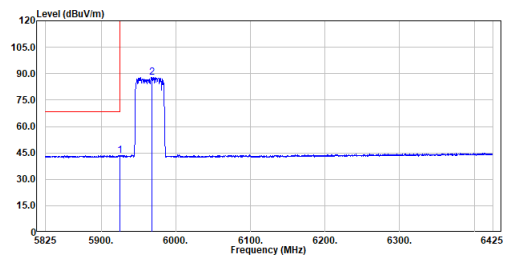


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5924.300	43.68	68.20	-24.52	20.85	22.83	Average
2	5967.200	87.91	-----	-----	64.95	22.96	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_5965MHz
Test By :Cyril Chen

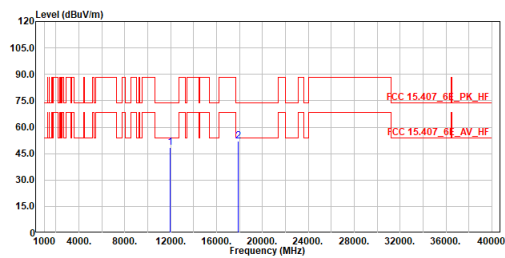


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11930.000	48.42	74.00	-25.58	54.29	-5.87	Peak
2	17895.000	52.07	74.00	-21.93	54.34	-2.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_5965MHz
Test By :Cyril Chen

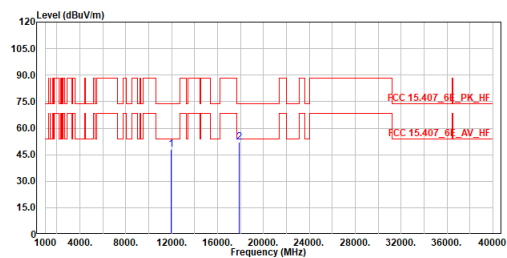


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11930.000	47.98	74.00	-26.02	53.85	-5.87	Peak
2	17895.000	52.06	74.00	-21.94	54.33	-2.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_6205MHz
Test By :Cyril Chen

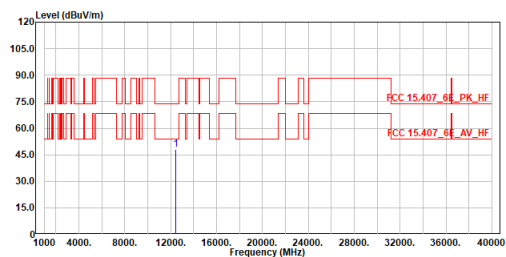


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	12410.000	47.93	74.00	-26.07	53.36	-5.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_6205MHz
Test By :Cyril Chen

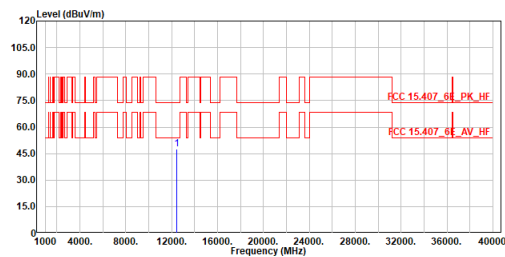


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	12410.000	47.45	74.00	-26.55	52.88	-5.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_6405MHz
Test By :Cyril Chen

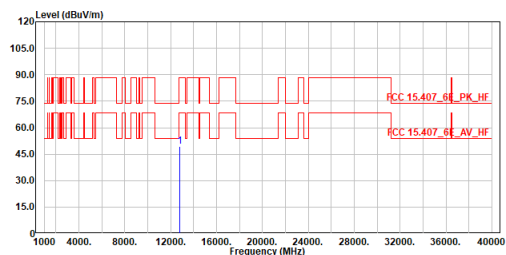


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	12810.000	49.30	88.20	-38.90	54.02	-4.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_6405MHz
Test By :Cyril Chen

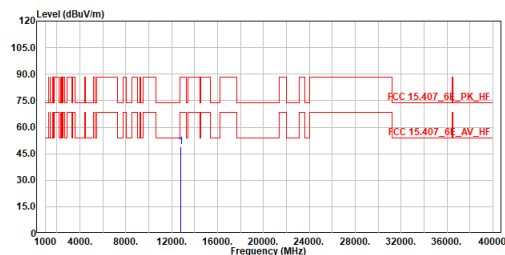

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	12810.000	48.87	88.20	-39.33	53.59	-4.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.