



FCC TEST REPORT

FCC ID: 2A6HU-WXC13

On Behalf of

DONGGUAN YI RUI ELECTRONIC TECHNOLOGY CO.,LTD.

wireless charger

Model No.: WXC-13, EAC-AP26


Prepared for : DONGGUAN YI RUI ELECTRONIC TECHNOLOGY CO.,LTD
Address : ROOM NO. 202, BUILDING 2, NO. 11, NIULING ROAD,CHANGPING
TOWN, DONGGUAN, CHINA

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2603114-C01-R01
Date of Receipt : Feb.04, 2026
Date of Test : Feb.05, 2026-Mar.06, 2026
Date of Report : Mar.07, 2026
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Test Result Summary	5
2. General Information	6
2.1. DESCRIPTION OF DEVICE (EUT)	6
2.2. ACCESSORIES OF DEVICE (EUT)	7
2.3. TESTED SUPPORTING SYSTEM DETAILS	7
2.4. BLOCK DIAGRAM OF CONNECTION BETWEEN EUT AND SIMULATORS	7
2.5. DESCRIPTION OF TEST MODES	7
2.6. TEST CONDITIONS	7
2.7. TEST FACILITY	8
2.8. MEASUREMENT UNCERTAINTY	8
2.9. TEST EQUIPMENT LIST	9
3. Test Results and Measurement Data	10
3.1. CONDUCTED EMISSION	10
3.2. RADIATED SPURIOUS EMISSION MEASUREMENT	14
3.3. TEST SPECIFICATION	26
4. Photos of test setup	29
5. Photos of EUT	29

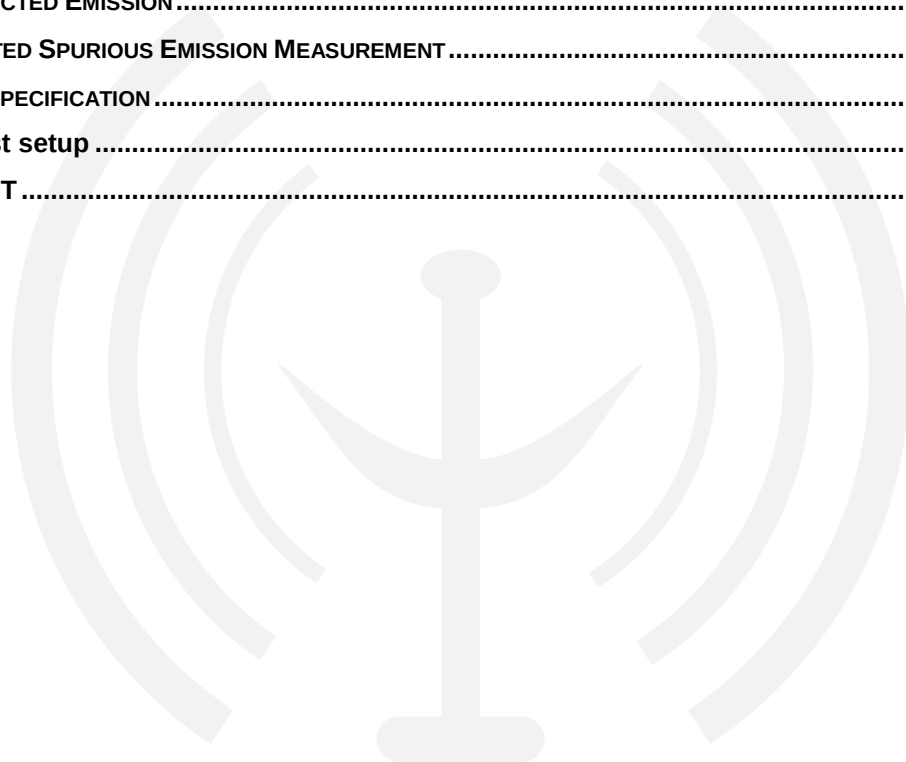

TEST REPORT DECLARATION

Applicant : DONGGUAN YI RUI ELECTRONIC TECHNOLOGY CO.,LTD
Address : ROOM NO. 202, BUILDING 2, NO. 11, NIULING ROAD,CHANGPING TOWN,
DONGGUAN, CHINA
Manufacturer : DONGGUAN YI RUI ELECTRONIC TECHNOLOGY CO.,LTD
Address : ROOM NO. 202, BUILDING 2, NO. 11, NIULING ROAD,CHANGPING TOWN,
DONGGUAN, CHINA
EUT Description : wireless charger
(A) Model No. : WXC-13, EAC-AP26
(B) Trademark : N/A

Measurement Standard Used:

FCC CFR Title 47 Part 15 Subpart C

ANSI C63.10:2020

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC CFR Title 47 Part 15 Subpart C requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang
Test Engineer



Approved by (name + signature).....:

Simple Guan
Project Manager



Date of issue.....:

Mar.07, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	Mar.07, 2026	Initial released Issue	Felix Pang



1. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209	PASS
Occupied Bandwidth	§15.215 (c)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.



2. General Information

2.1. Description of Device (EUT)

EUT Name : wireless charger

Model No. : WXC-13, EAC-AP26

DIFF. : All models have the same circuit and RF module, except for the model name and color

Power supply : Input: DC 5V/9V/12V From adapter
Wireless output(Coil 3): 5 W, 7.5 W, 10 W,15 W
Wireless output(Coil 2): 5 W
Wireless output(Coil 1): 2 W

Radio Technology	: Wireless power transmission systems
Operation frequency	: 105-205kHz
Modulation	: ASK
Antenna Type	: Inductive loop coil Antenna
Connector cable loss	: 0dBi
Software version	: V1.0
Hardware version	: V1.0
Note	: Antenna information is provided by applicant. Testing lab is not responsible for the accuracy of the information.


2.2. Accessories of Device (EUT)

Accessories	:	N/A
Manufacturer	:	N/A
Model	:	N/A
specifications	:	N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Adapter	Xiaomi	MDY-08-EH	N/A	N/A
2	Wireless charging load	N/A	5W/7.5W/10W/ 15W Load	N/A	N/A
3	Wireless charging load	N/A	3W Load	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Description of Test Modes

Number	Modes
1	ANT1-Watch charging:empty load
2	ANT1-Watch charging:half load
3	ANT1-Watch charging:full load
4	ANT2-Earbuds charging:empty load
5	ANT2- Earbuds charging:half load
6	ANT2- Earbuds charging:full load
7	ANT3-Phone charging:empty load
8	ANT3- Phone charging:half load
9	ANT3- Phone charging:full load
10	ANT1-Watch charging:full load + ANT2- Earbuds charging:full load +ANT3- Phone charging:full load
11	Standby

Note:1. All test modes has been tested, this report only reflected the worst mode.

2. Mode 3 is worst case for Conducted Emission and Spurious Emission.

2.6. Test Conditions

Items	Required
Temperature range:	15-35°C
Humidity range:	25-75%
Pressure range:	86-106kPa

2.7. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(Below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2.9. Test Equipment List


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2025.12.19	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2025.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2025.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2025.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2025.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G1 8G-45dB	SK2022032901	/	2025.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118 G-45	SK2020010801	/	2025.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2025.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P008	/	2025.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2025.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2025.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	202211251638	/	2025.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2025.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2025.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2025.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2025.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2025.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2025.12.18	1 Year

For Test Software Information			
Item	Software Name	Manufacturer	Version
RE	EZ EMC	Farad	PSI-3A1
CE	EZ EMC	Farad	PSI-3A1
RF	RTS	TACHOY	V1.0.0

3. Test Results and Measurement Data

3.1. Conducted Emission

3.1.1. Test Specification

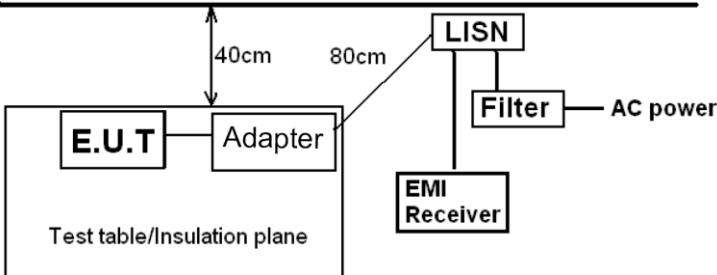Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2020														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Transmitting Mode														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.														
Test Result:	PASS														

3.1.2. Test data


Please refer to following diagram for individual

Test Mode	: Mode 10
Test Results	: PASS
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.



Mode 1:


Temperature	22.1°C	Humidity	50%
Pol	Line		AC 120V/60Hz

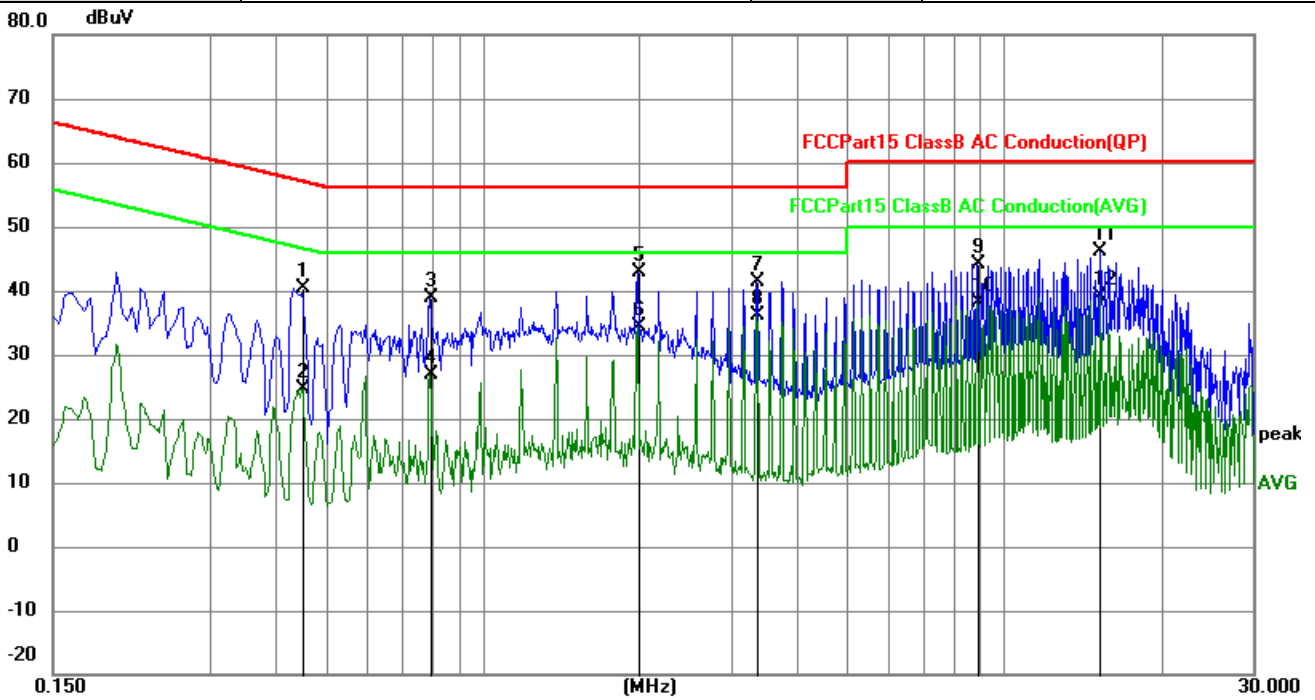

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4515	30.61	9.74	40.35	56.85	-16.50	QP
2	0.4515	14.98	9.74	24.72	46.85	-22.13	AVG
3	0.7935	29.02	9.76	38.78	56.00	-17.22	QP
4	0.7935	17.19	9.76	26.95	46.00	-19.05	AVG
5	1.9815	33.05	9.75	42.80	56.00	-13.20	QP
6	1.9815	24.69	9.75	34.44	46.00	-11.56	AVG
7	3.3630	31.60	9.74	41.34	56.00	-14.66	QP
8	3.3630	26.28	9.74	36.02	46.00	-9.98	AVG
9	8.9070	34.63	9.58	44.21	60.00	-15.79	QP
10	8.9070	28.59	9.58	38.17	50.00	-11.83	AVG
11	15.2475	36.89	9.35	46.24	60.00	-13.76	QP
12	15.2475	29.67	9.35	39.02	50.00	-10.98	AVG

Level = Reading + Factor Margin = Level - Limit

Pol	Neutral
-----	---------

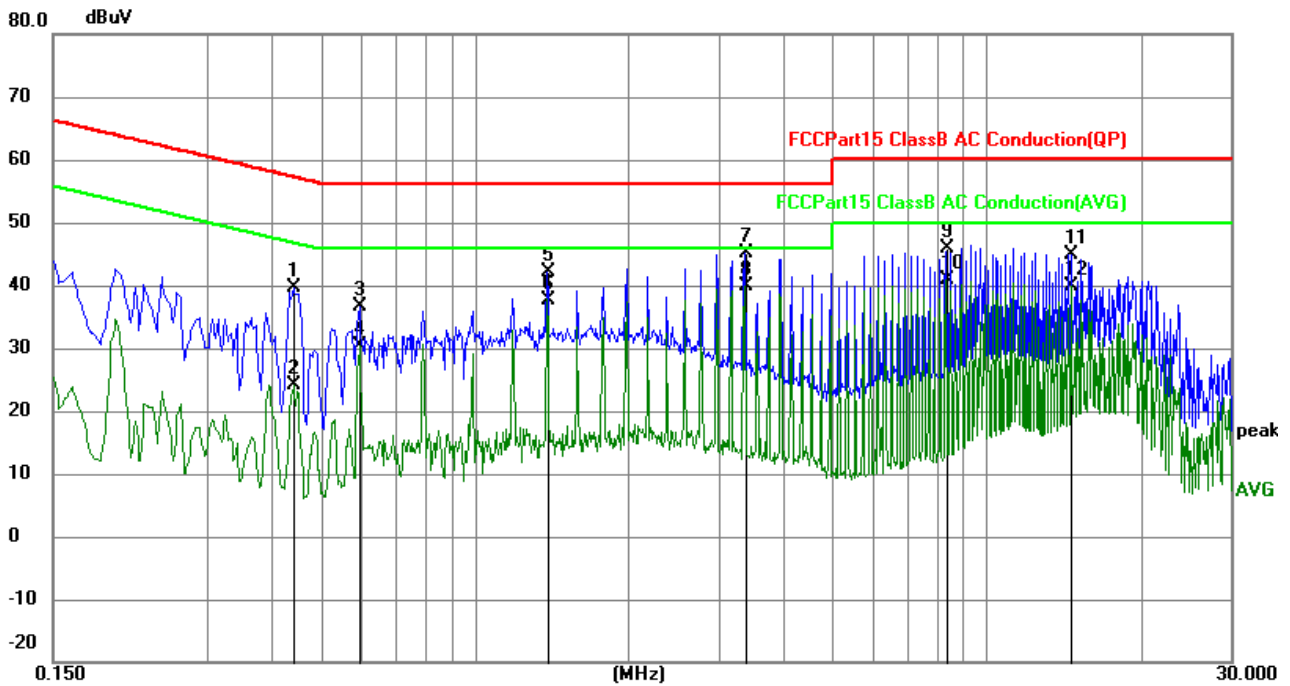



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4425	29.78	9.74	39.52	57.01	-17.49	QP
2	0.4425	14.37	9.74	24.11	47.01	-22.90	AVG
3	0.5954	26.83	9.74	36.57	56.00	-19.43	QP
4	0.5954	20.70	9.74	30.44	46.00	-15.56	AVG
5	1.3874	32.32	9.75	42.07	56.00	-13.93	QP
6	1.3874	28.00	9.75	37.75	46.00	-8.25	AVG
7	3.3675	35.34	9.74	45.08	56.00	-10.92	QP
8	3.3675	30.04	9.74	39.78	46.00	-6.22	AVG
9	8.3265	36.33	9.43	45.76	60.00	-14.24	QP
10	8.3265	31.34	9.43	40.77	50.00	-9.23	AVG
11	14.6625	35.47	9.36	44.83	60.00	-15.17	QP
12	14.6625	30.44	9.36	39.80	50.00	-10.20	AVG

Level = Reading + Factor Margin = Level - Limit

3.2. Radiated Spurious Emission Measurement

3.2.1. Test Specification

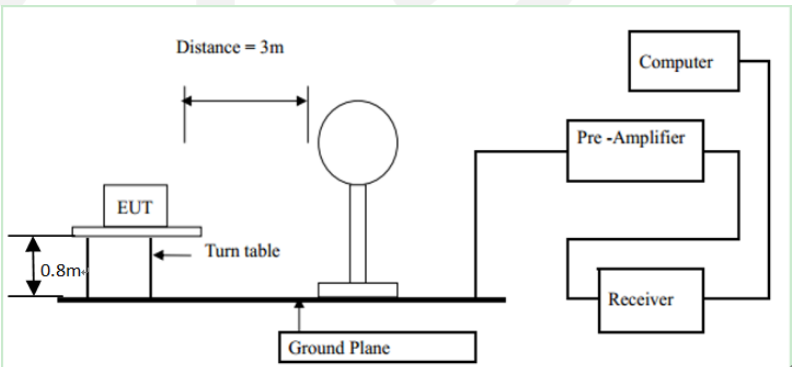Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10: 2020				
Frequency Range:	9 kHz to 1 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Coaxial & Coplanar(9KHz-30MHz) Horizontal & Vertical(30MHz-1GHz)				
Operation mode:	Refer to item 4.1				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 KHz, 110-490 KHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.					
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
Test setup:	For radiated emissions below 30MHz				
					
30MHz to 1GHz					

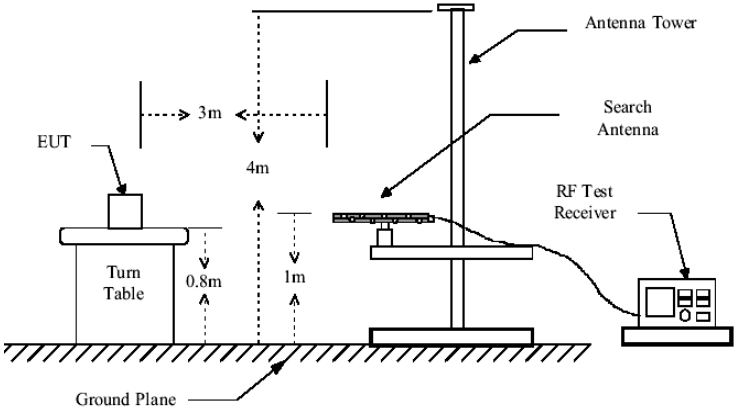	
Test Procedure:	1. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. 2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level 3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 4.1 for details
Test results:	PASS

3.2.2. Test Data

Please refer to following diagram for individual


Frequency Range	: 9KHz~30MHz
Test Mode	: Mode 3/6/9
Test Results	: PASS
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.



Mode 3:

Antenna polarity: Coaxial

9KHz-0.15MHz

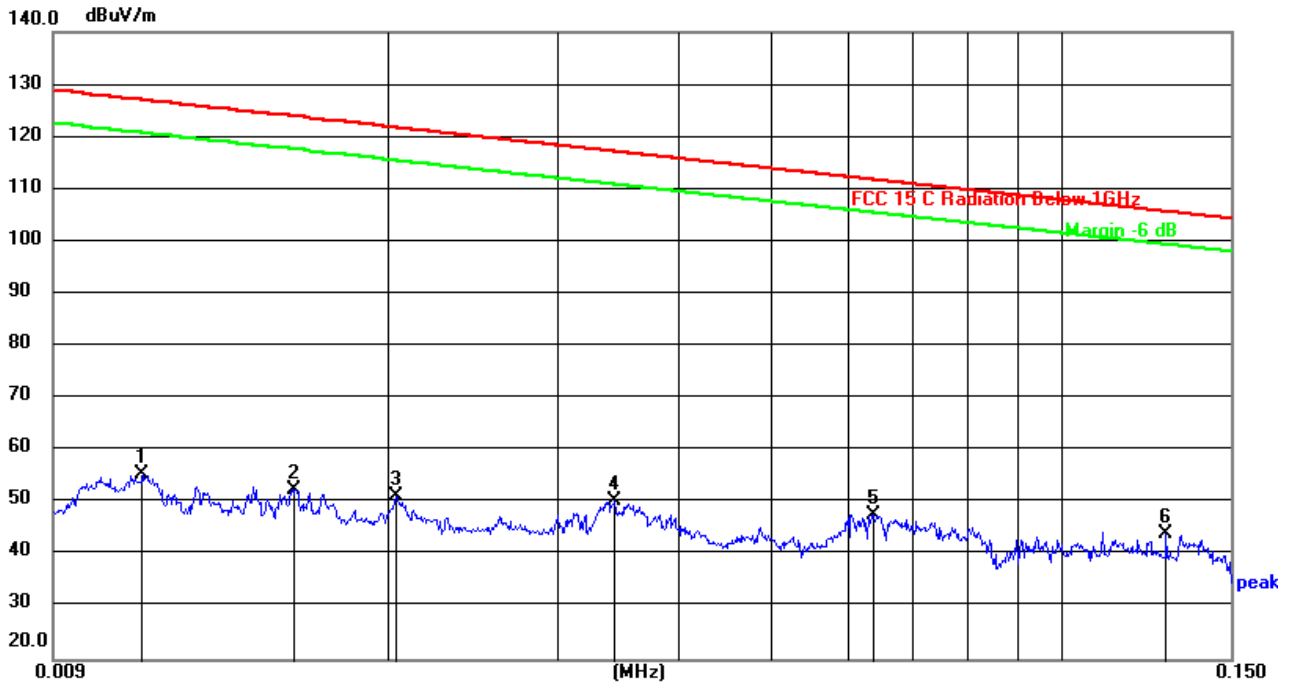


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0111	81.44	-25.88	55.56	126.70	-71.14	peak
2	0.0160	78.39	-25.88	52.51	123.52	-71.01	peak
3	0.0204	77.08	-25.88	51.20	121.41	-70.21	peak
4	0.0343	76.21	-25.88	50.33	116.90	-66.57	peak
5	0.0637	73.76	-25.88	47.88	111.52	-63.64	peak
6	0.1282	70.06	-25.90	44.16	105.45	-61.29	peak

Note: 1.Level = Reading + Factor Margin = Level - Limit

2.'-'Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.

0.15MHz-30MHz

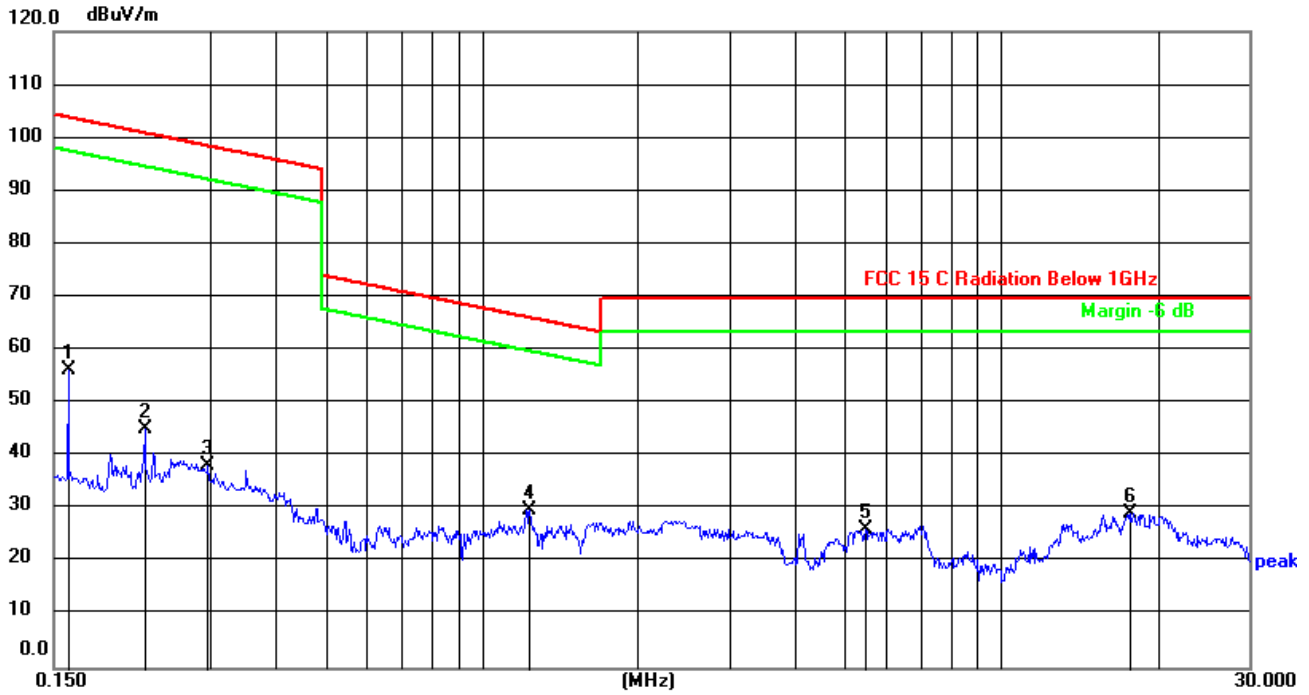

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1597	36.40	19.83	56.23	103.54	-47.31	peak
2	0.2242	25.42	19.81	45.23	100.59	-55.36	peak
3	0.2968	18.37	19.79	38.16	98.15	-59.99	peak
4	1.2356	9.77	20.20	29.97	65.79	-35.82	peak
5	5.4763	5.81	20.38	26.19	69.50	-43.31	peak
6	17.7545	8.69	20.61	29.30	69.50	-40.20	peak


Note: 1. Level = Reading + Factor Margin = Level - Limit

2. '-' Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.

Mode 6:

Antenna polarity: Coaxial

9KHz-0.15MHz

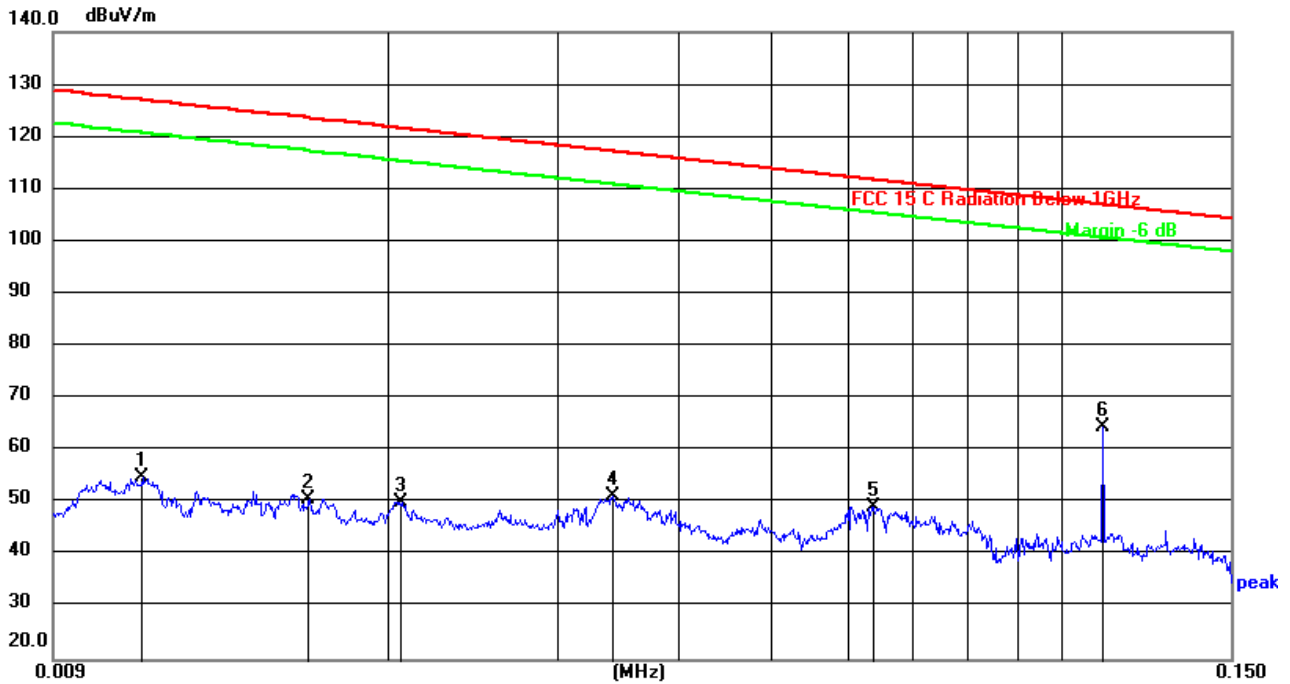


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0111	80.94	-25.88	55.06	126.70	-71.64	peak
2	0.0165	76.72	-25.88	50.84	123.26	-72.42	peak
3	0.0206	76.13	-25.88	50.25	121.33	-71.08	peak
4	0.0342	77.24	-25.88	51.36	116.92	-65.56	peak
5	0.0637	75.26	-25.88	49.38	111.52	-62.14	peak
6	0.1102	90.41	-25.88	64.53	106.76	-42.23	peak

Note: 1.Level = Reading + Factor Margin = Level - Limit

2.'-'Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.

0.15MHz-30MHz

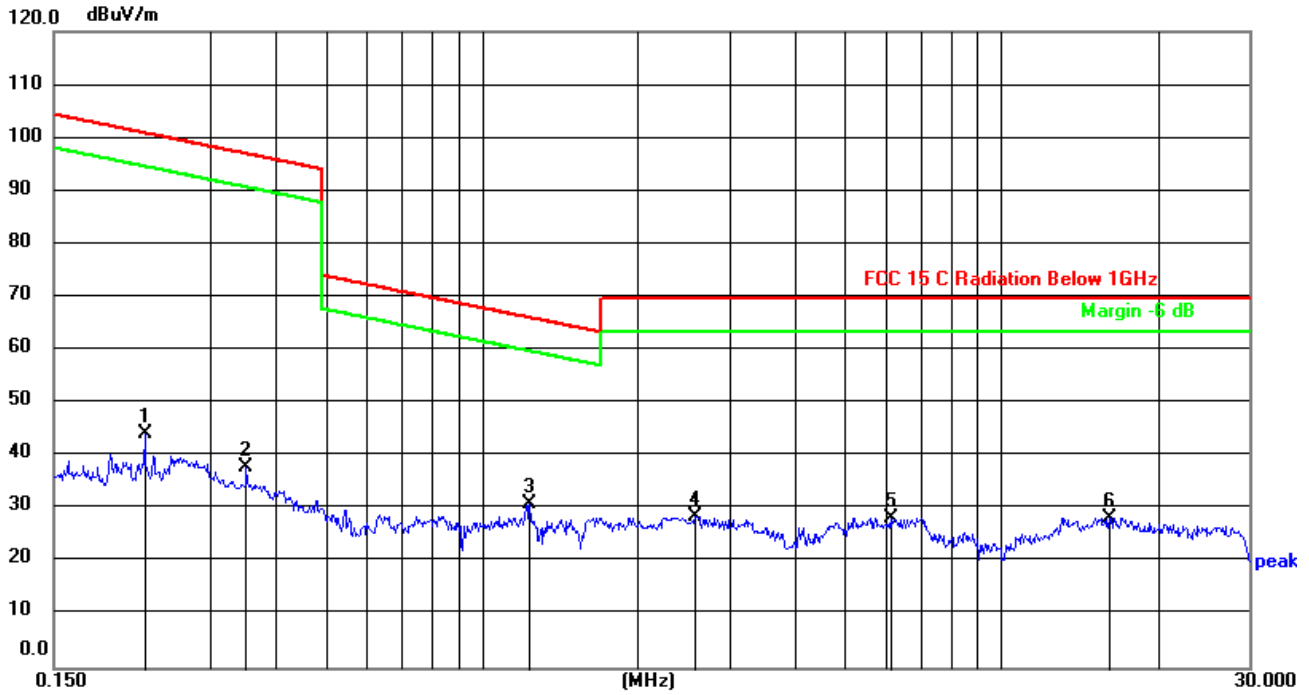

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.2242	24.42	19.81	44.23	100.59	-56.36	peak
2	0.3518	18.18	19.77	37.95	96.68	-58.73	peak
3	1.2356	10.77	20.20	30.97	65.79	-34.82	peak
4	2.5670	8.83	19.97	28.80	69.50	-40.70	peak
5	6.1208	7.99	20.45	28.44	69.50	-41.06	peak
6	16.1398	8.15	20.35	28.50	69.50	-41.00	peak


Note: 1. Level = Reading + Factor Margin = Level - Limit

2. '-' Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.

Mode 9:

Antenna polarity: Coaxial

9KHz-0.15MHz

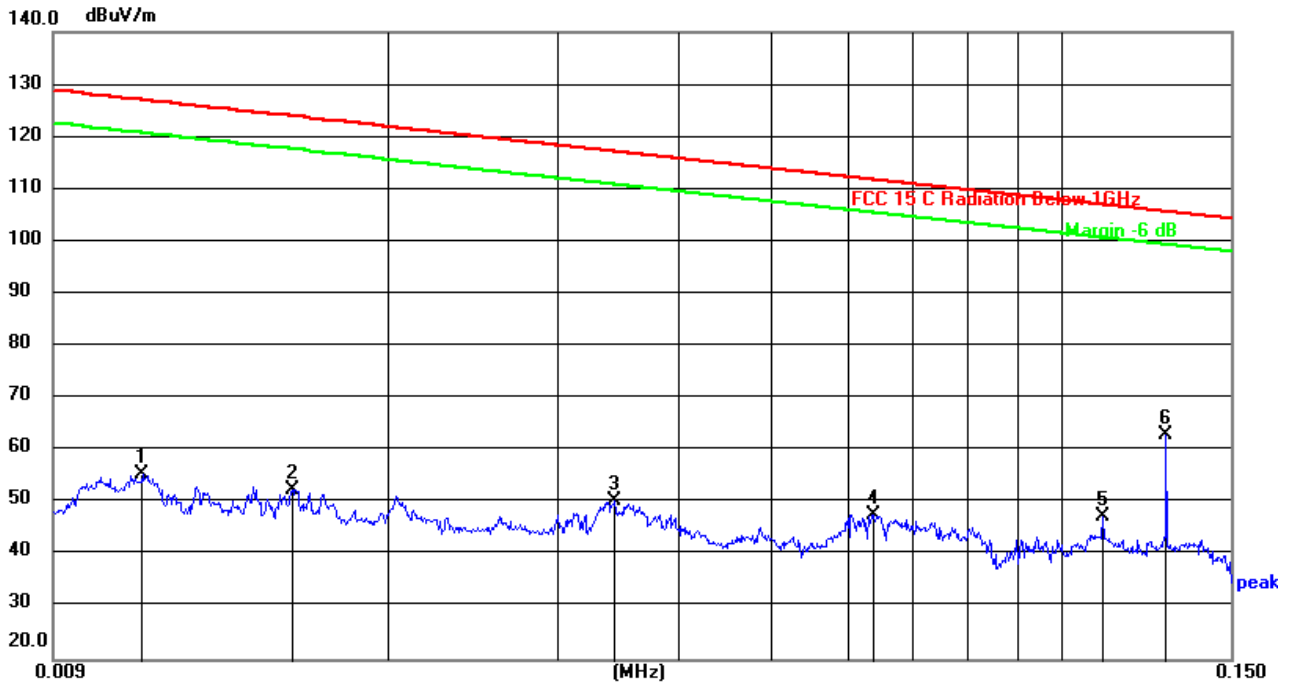


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0111	81.44	-25.88	55.56	126.70	-71.14	peak
2	0.0159	78.48	-25.88	52.60	123.58	-70.98	peak
3	0.0343	76.21	-25.88	50.33	116.90	-66.57	peak
4	0.0637	73.76	-25.88	47.88	111.52	-63.64	peak
5	0.1102	73.41	-25.88	47.53	106.76	-59.23	peak
6	0.1282	89.06	-25.90	63.16	105.45	-42.29	peak

Note: 1. Level = Reading + Factor Margin = Level - Limit

2. '-' Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.

0.15MHz-30MHz

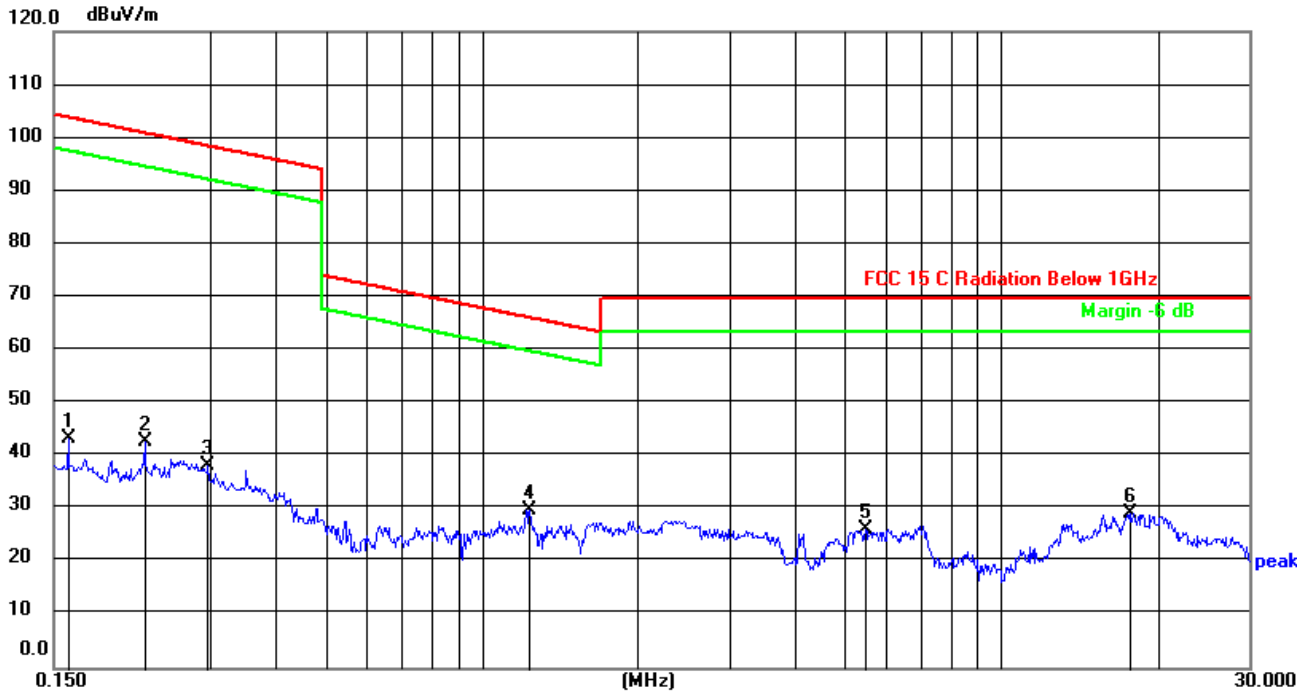

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1597	23.40	19.83	43.23	103.54	-60.31	peak
2	0.2242	22.92	19.81	42.73	100.59	-57.86	peak
3	0.2968	18.37	19.79	38.16	98.15	-59.99	peak
4	1.2356	9.77	20.20	29.97	65.79	-35.82	peak
5	5.4763	5.81	20.38	26.19	69.50	-43.31	peak
6	17.7545	8.69	20.61	29.30	69.50	-40.20	peak

Note: 1. Level = Reading + Factor Margin = Level - Limit

2. '-' Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.


Frequency Range	: 30MHz~1000MHz
Test Mode	: Mode 10
Test Results	: PASS
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.



Mode 1:

30MHz-1GHz

Temperature	23.4°C	Humidity	58%
Pol	Vertical	Test Voltage	AC 120V/60Hz

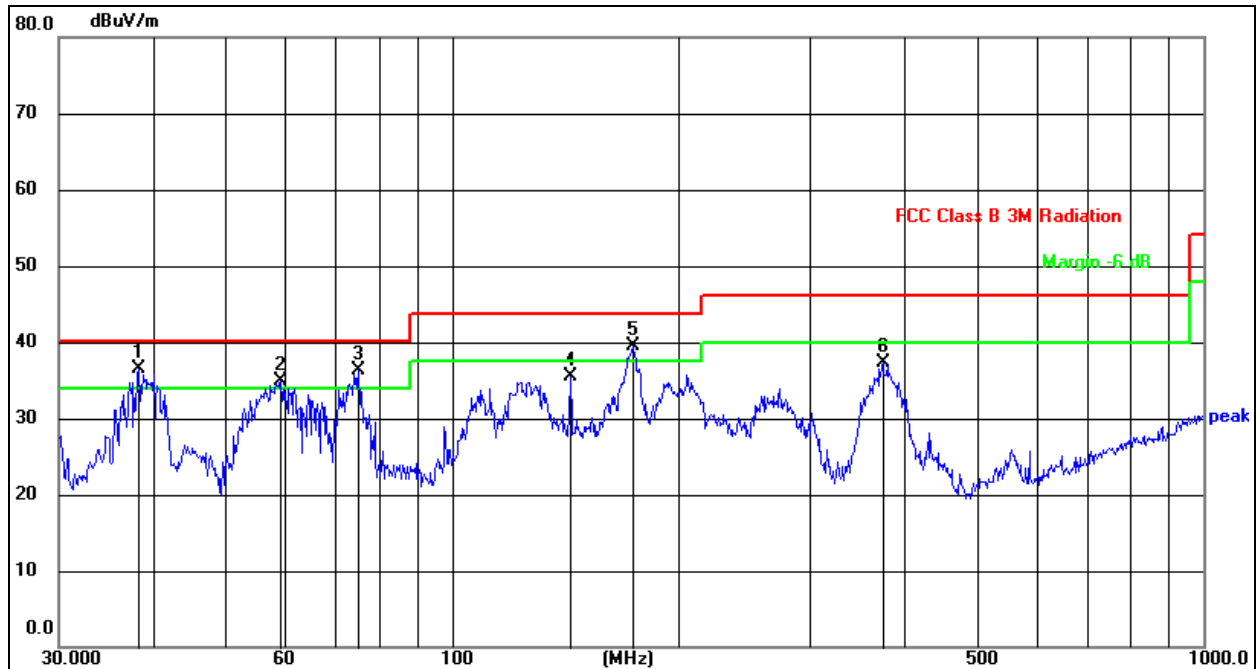


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38.3462	57.65	-21.20	36.45	40.00	-3.55	QP
2	59.2323	57.39	-22.49	34.90	40.00	-5.10	QP
3	75.1821	61.46	-25.16	36.30	40.00	-3.70	QP
4	143.8294	56.65	-21.20	35.45	43.50	-8.05	QP
5	174.4240	61.05	-21.64	39.41	43.50	-4.09	QP
6	374.6225	55.50	-18.18	37.32	46.00	-8.68	QP

Note: 1.Level = Reading + Factor Margin = Level - Limit

2.'-'Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.

Pol	Horizontal
-----	------------

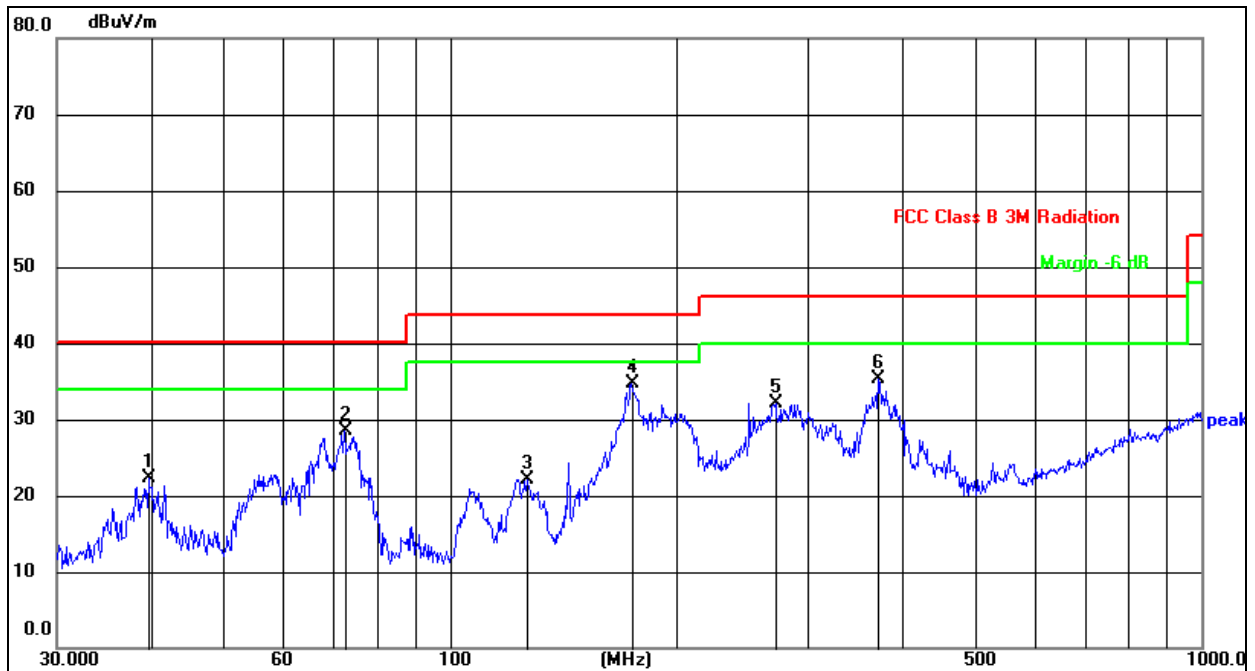


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.7146	43.27	-20.99	22.28	40.00	-17.72	QP
2	72.3376	53.05	-24.61	28.44	40.00	-11.56	QP
3	126.7723	44.84	-22.75	22.09	43.50	-21.41	QP
4	174.4241	56.37	-21.64	34.73	43.50	-8.77	QP
5	271.3246	53.83	-21.66	32.17	46.00	-13.83	QP
6	372.0045	53.52	-18.30	35.22	46.00	-10.78	QP

Note: 1. Level = Reading + Factor Margin = Level - Limit

2. '-' Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.

3.3. Test Specification

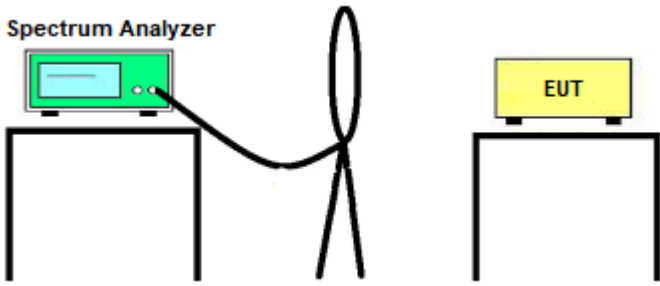
Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2020
Limit:	N/A
Test Procedure:	1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; 1% to 5% of the OBW; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test setup:	 The diagram illustrates the test setup. On the left, a 'Spectrum Analyzer' is shown on a stand. A cable connects it to a loop-shaped 'artificial antenna'. This antenna is positioned to the left of the 'EUT' (Equipment Under Test), which is also on a stand. The background features a large, faint watermark of a radio tower with concentric arcs representing signal waves.
Test Mode:	Refer to section 4.1 for details
Test results:	PASS

3.3.1. Test data


Temperature:	25.2 °C	Relative Humidity:	55.1%
Pressure:	101kPa		

	Frequency (KHz)	20dB bandwidth (KHz)	Result
ANT2-Earbuds charging	109.9	0.133	Pass
ANT3-Phone charging	128.5	0.149	Pass
ANT1-Watch charging	160.3	0.173	Pass


ANT2-Earbuds charging

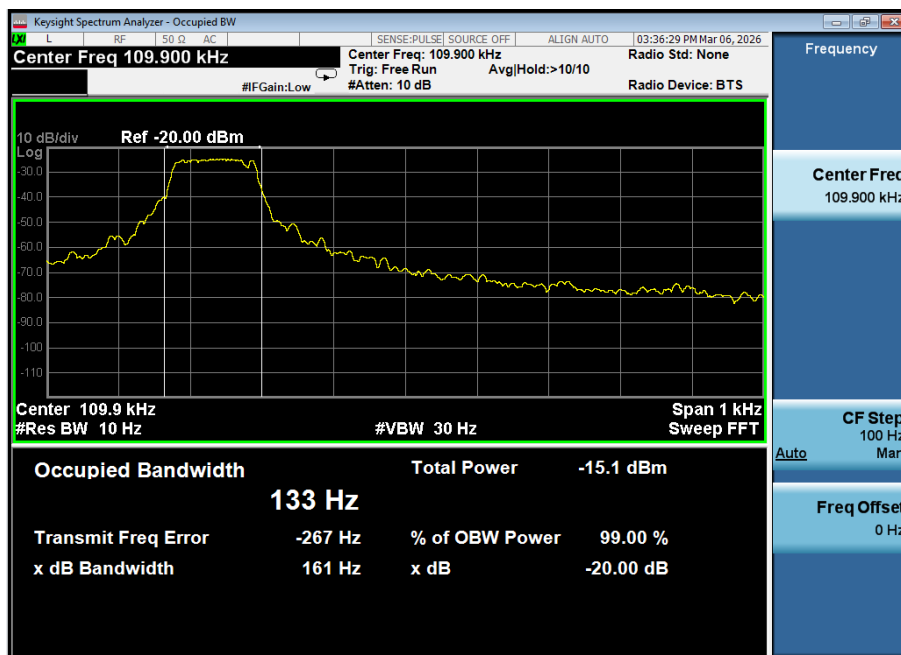

ANT3-Phone charging

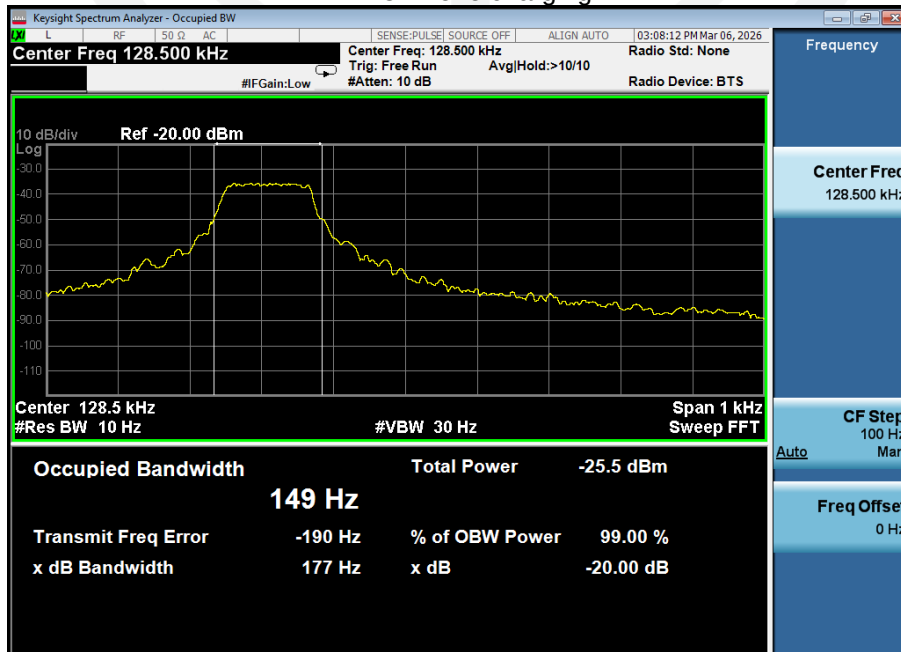

ANT1-Watch charging

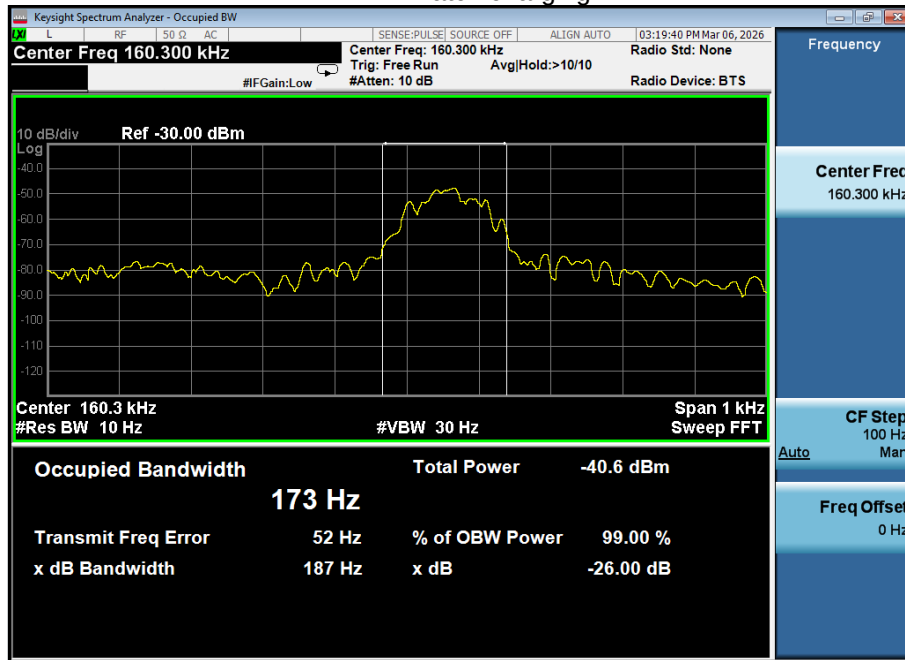

4. Photos of test setup

Reference to the **appendix I Test Setup Photo** for details.

5. Photos of EUT

Reference to the **appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----

