


6.875-7.125GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

CSE Other [PK]

7025MHz

02/03/2023

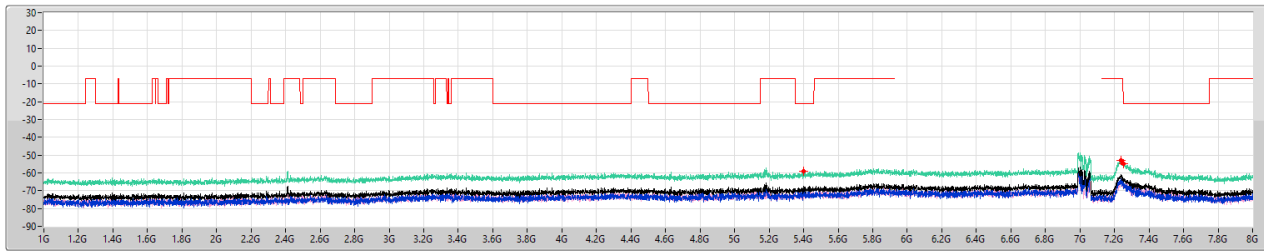

Limit.PK  
 EIRP.PK  
 Sum.PK  
 Port 1  
 Port 2


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.39863G | -58.97    | -21.20     | -37.77     | 8.32   | 0.00     | -67.29    | -69.57  | -71.18  |
| 1G          | 8G         | 1M      | PK   | 7.23788G | -52.75    | -7.00      | -45.75     | 8.32   | 0.00     | -61.07    | -63.51  | -64.74  |
| 1G          | 8G         | 1M      | PK   | 7.25013G | -54.90    | -21.20     | -33.70     | 8.32   | 0.00     | -63.22    | -67.51  | -65.24  |

6.875-7.125GHz\_802.11ax HEW80\_Nss1,(MCS0)\_2TX

CSE Other [AV]

7025MHz

02/03/2023

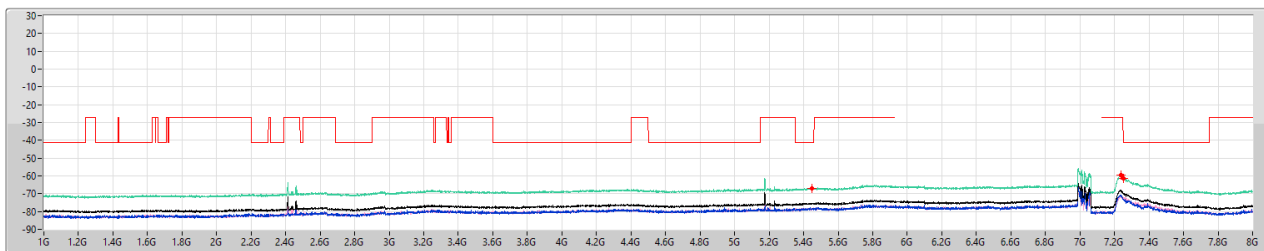

Limit.AV  
 EIRP.AV  
 Sum.AV  
 Port 1  
 Port 2


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44675G | -66.98    | -41.20     | -25.78     | 8.32   | 0.00     | -75.30    | -78.31  | -78.31  |
| 1G          | 8G         | 1M      | AV   | 7.23613G | -59.67    | -27.00     | -32.67     | 8.32   | 0.00     | -67.99    | -71.12  | -70.88  |
| 1G          | 8G         | 1M      | AV   | 7.25186G | -61.38    | -41.20     | -20.18     | 8.32   | 0.00     | -69.70    | -73.13  | -72.32  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [PK]

6025MHz

01/03/2023

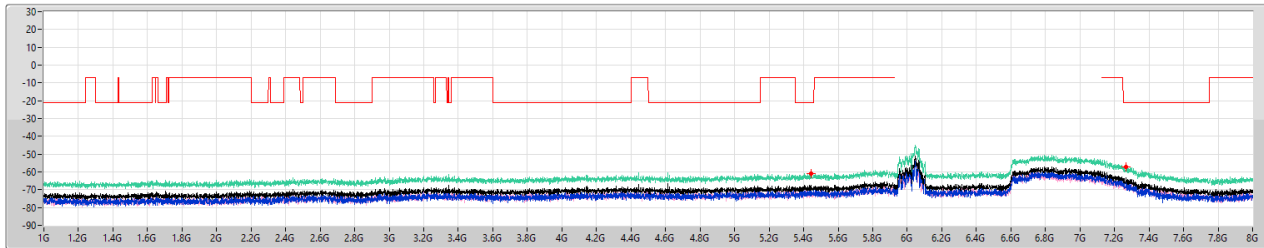


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.4415G  | -60.83    | -21.20     | -39.63     | 6.49   | 0.00    | -67.32    | -69.49  | -71.37  |
| 1G          | 8G         | 1M      | PK   | 7.2685G  | -56.97    | -21.20     | -35.77     | 6.49   | 0.00    | -63.46    | -66.31  | -66.63  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [AV]

6025MHz

01/03/2023

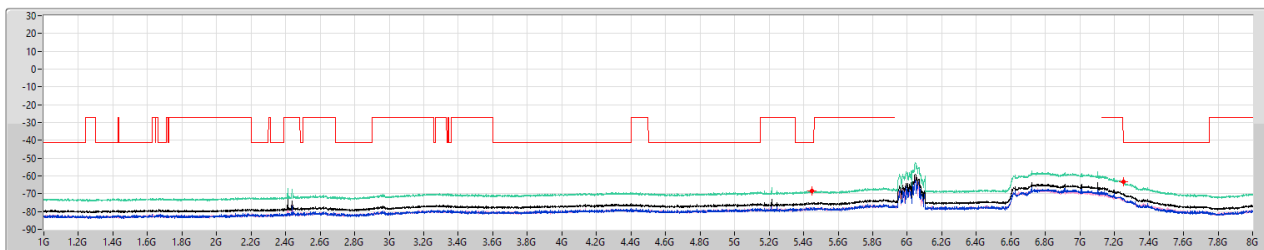


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.4485G  | -68.55    | -41.20     | -27.35     | 6.49   | 0.00    | -75.04    | -77.83  | -78.29  |
| 1G          | 8G         | 1M      | AV   | 7.251G   | -63.47    | -41.20     | -22.27     | 6.49   | 0.00    | -69.96    | -72.75  | -73.21  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [PK]

6185MHz

01/03/2023

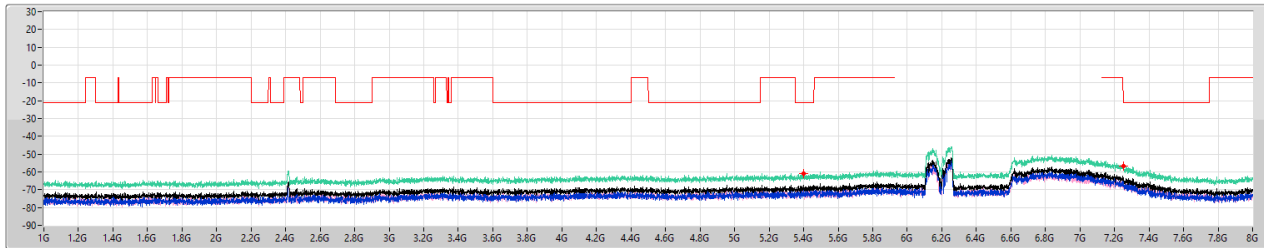


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.40213G | -61.14    | -21.20     | -39.94     | 6.49   | 0.00    | -67.63    | -69.38  | -72.43  |
| 1G          | 8G         | 1M      | PK   | 7.25013G | -56.76    | -21.20     | -35.56     | 6.49   | 0.00    | -63.25    | -66.59  | -65.96  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [AV]

6185MHz

01/03/2023

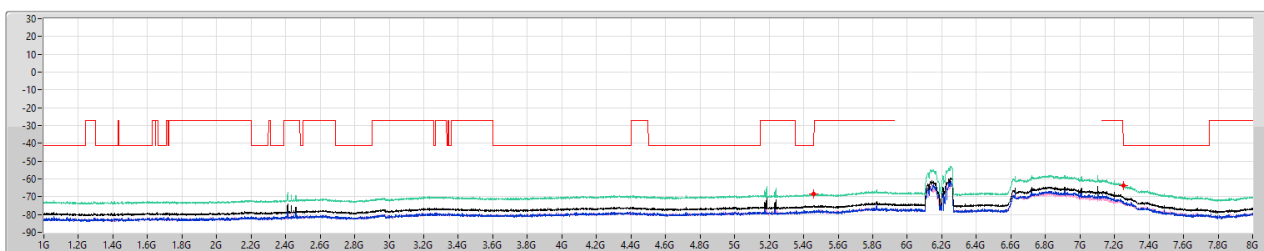


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.459G   | -68.65    | -41.20     | -27.45     | 6.49   | 0.00    | -75.14    | -78.04  | -78.27  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -63.66    | -41.20     | -22.46     | 6.49   | 0.00    | -70.15    | -72.61  | -73.78  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [PK]

6345MHz

01/03/2023

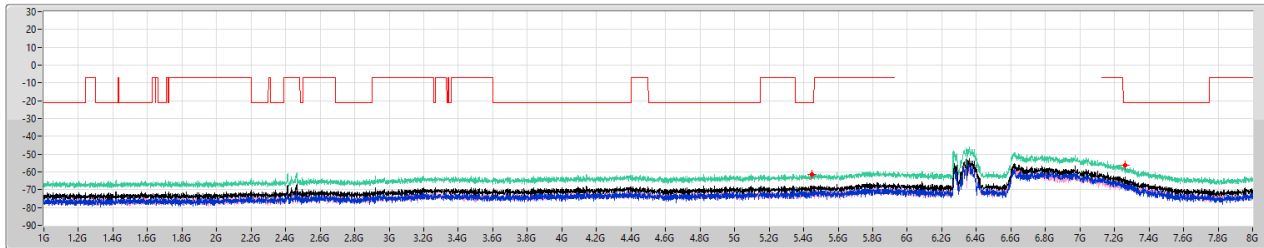


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.44588G | -61.41    | -21.20     | -40.21     | 6.49   | 0.00    | -67.90    | -70.53  | -71.33  |
| 1G          | 8G         | 1M      | PK   | 7.25975G | -56.47    | -21.20     | -35.27     | 6.49   | 0.00    | -62.96    | -65.37  | -66.66  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [AV]

6345MHz

01/03/2023

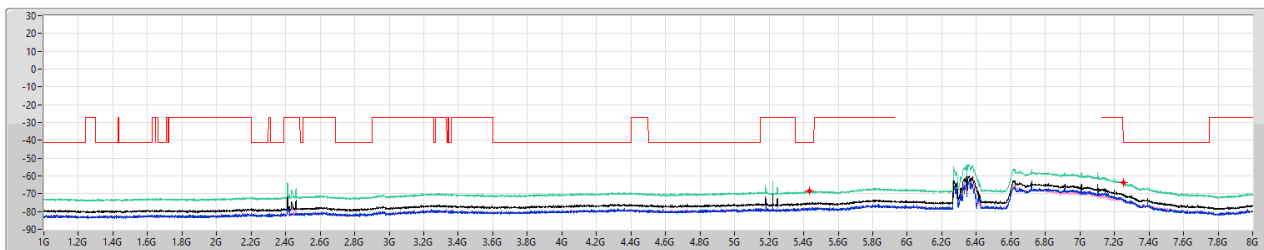


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.43538G | -68.43    | -41.20     | -27.23     | 6.49   | 0.00    | -74.92    | -77.72  | -78.16  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -63.82    | -41.20     | -22.62     | 6.49   | 0.00    | -70.31    | -72.90  | -73.78  |

6.425-6.525GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [PK]

6505MHz

01/03/2023

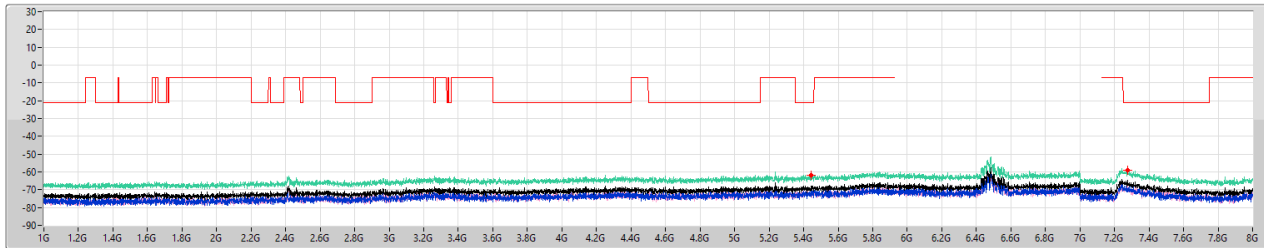


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.445G   | -61.91    | -21.20     | -40.71     | 5.90   | 0.00    | -67.81    | -71.34  | -70.35  |
| 1G          | 8G         | 1M      | PK   | 7.27638G | -58.84    | -21.20     | -37.64     | 5.90   | 0.00    | -64.74    | -70.25  | -66.17  |

6.425-6.525GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [AV]

6505MHz

01/03/2023

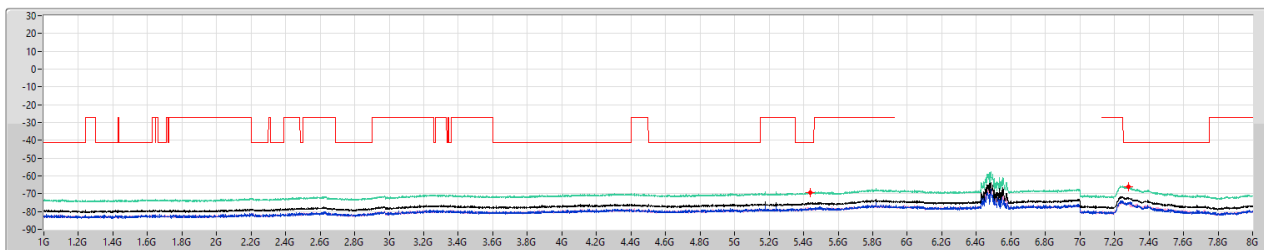


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.43625G | -69.24    | -41.20     | -28.04     | 5.90   | 0.00    | -75.14    | -77.93  | -78.39  |
| 1G          | 8G         | 1M      | AV   | 7.27988G | -66.22    | -41.20     | -25.02     | 5.90   | 0.00    | -72.12    | -74.85  | -75.44  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [PK]

6665MHz

02/03/2023

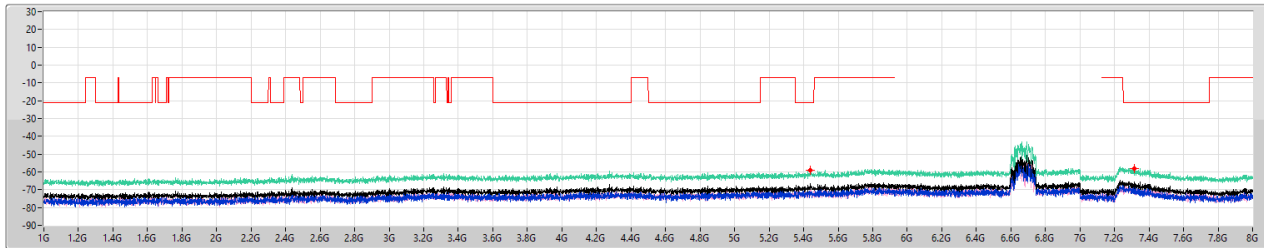


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.43888G | -58.88    | -21.20     | -37.68     | 7.65   | 0.00    | -66.53    | -71.08  | -68.40  |
| 1G          | 8G         | 1M      | PK   | 7.31488G | -57.96    | -21.20     | -36.76     | 7.65   | 0.00    | -65.61    | -69.52  | -67.87  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [AV]

6665MHz

02/03/2023

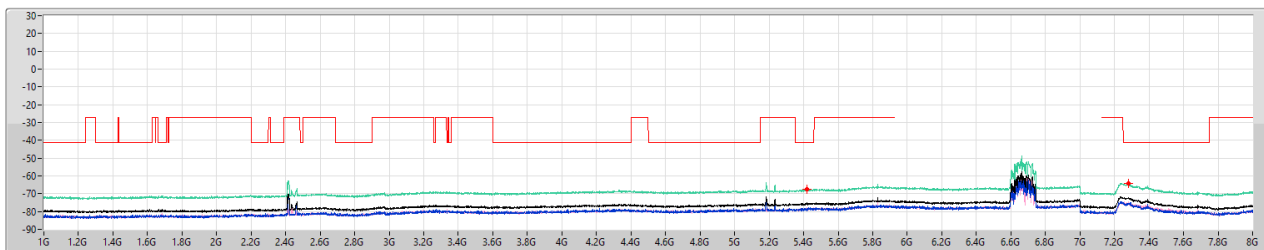


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.41963G | -67.50    | -41.20     | -26.30     | 7.65   | 0.00    | -75.15    | -78.51  | -77.84  |
| 1G          | 8G         | 1M      | AV   | 7.2825G  | -64.36    | -41.20     | -23.16     | 7.65   | 0.00    | -72.01    | -75.64  | -74.48  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [PK]

6825MHz

02/03/2023

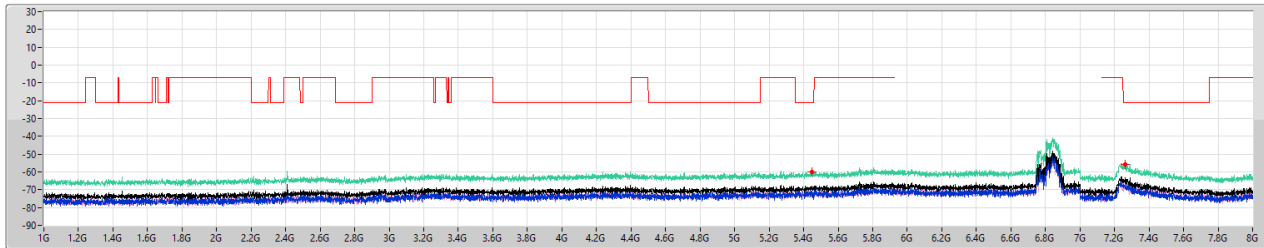


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.4455G  | -60.22    | -21.20     | -39.02     | 7.65   | 0.00    | -67.87    | -71.52  | -70.32  |
| 1G          | 8G         | 1M      | PK   | 7.2615G  | -55.60    | -21.20     | -34.40     | 7.65   | 0.00    | -63.25    | -65.69  | -66.92  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_2TX

CSE Other [AV]

6825MHz

02/03/2023

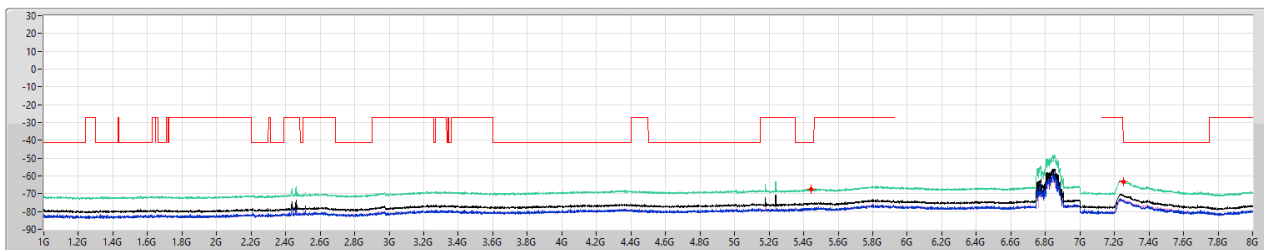



| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.4415G  | -67.56    | -41.20     | -26.36     | 7.65   | 0.00    | -75.21    | -78.58  | -77.89  |
| 1G          | 8G         | 1M      | AV   | 7.2518G  | -63.11    | -41.20     | -21.91     | 7.65   | 0.00    | -70.76    | -73.86  | -73.69  |

6.875-7.125GHz\_802.11ax HEW160\_Nss1,(MCS0)\_2TX

CSE Other [PK]

6985MHz

02/03/2023

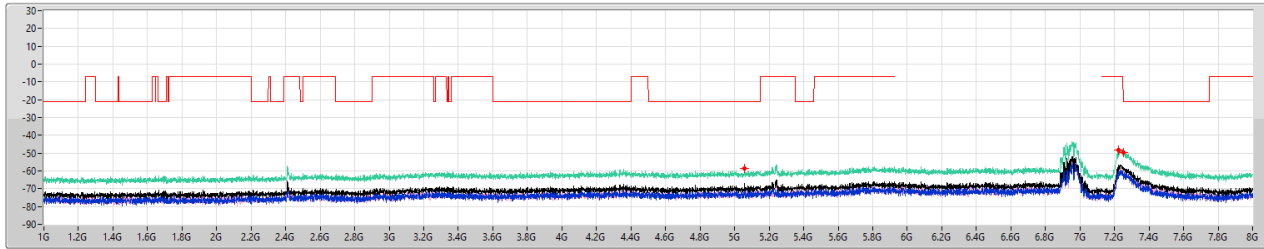



| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.05913G | -58.80    | -21.20     | -37.60     | 8.32   | 0.00     | -67.12    | -70.69  | -69.63  |
| 1G          | 8G         | 1M      | PK   | 7.23475G | -48.23    | -7.00      | -41.23     | 8.32   | 0.00     | -56.55    | -59.33  | -59.80  |
| 1G          | 8G         | 1M      | PK   | 7.25275G | -49.70    | -21.20     | -28.50     | 8.32   | 0.00     | -58.02    | -62.27  | -60.07  |

6.875-7.125GHz\_802.11ax HEW160\_Nss1,(MCS0)\_2TX

CSE Other [AV]

6985MHz

02/03/2023

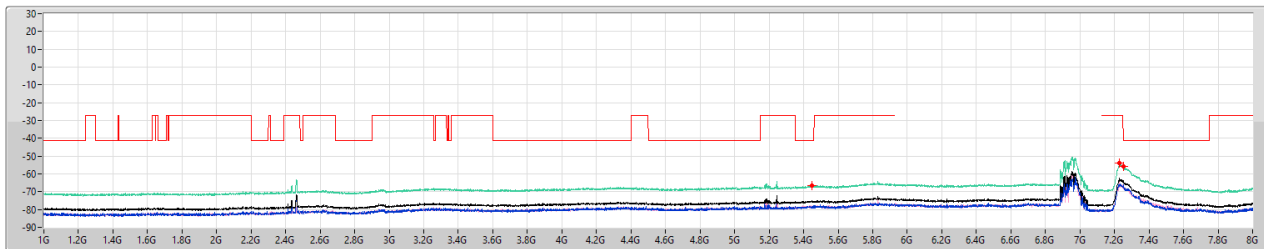


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44675G | -66.73    | -41.20     | -25.53     | 8.32   | 0.00     | -75.05    | -78.54  | -77.63  |
| 1G          | 8G         | 1M      | AV   | 7.23G    | -54.10    | -27.00     | -27.10     | 8.32   | 0.00     | -62.42    | -66.22  | -64.76  |
| 1G          | 8G         | 1M      | AV   | 7.25188G | -55.62    | -41.20     | -14.42     | 8.32   | 0.00     | -63.94    | -66.30  | -67.72  |

5.925-6.425GHz\_802.11ax HEW20\_Nss1,(MCS0)\_4TX

CSE Other [PK]

5955MHz

01/03/2023

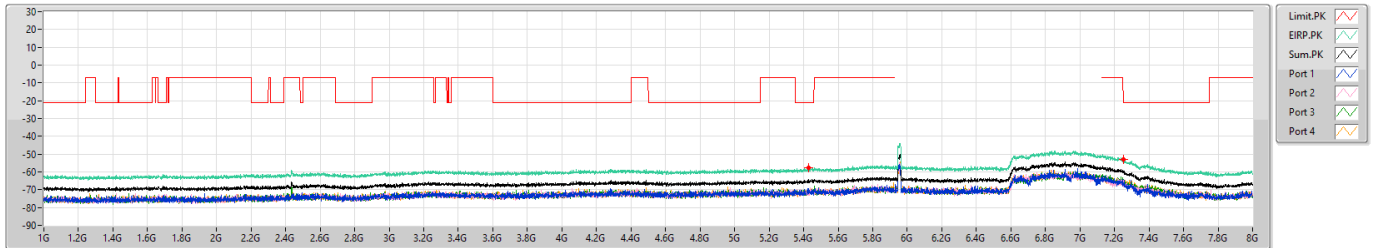


5.925-6.425GHz\_802.11ax HEW20\_Nss1,(MCS0)\_4TX

CSE Other [AV]

5955MHz

01/03/2023

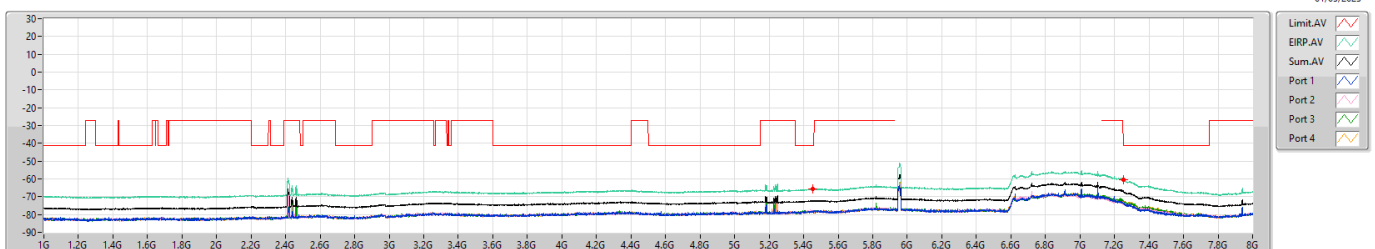


5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6175MHz

01/03/2023

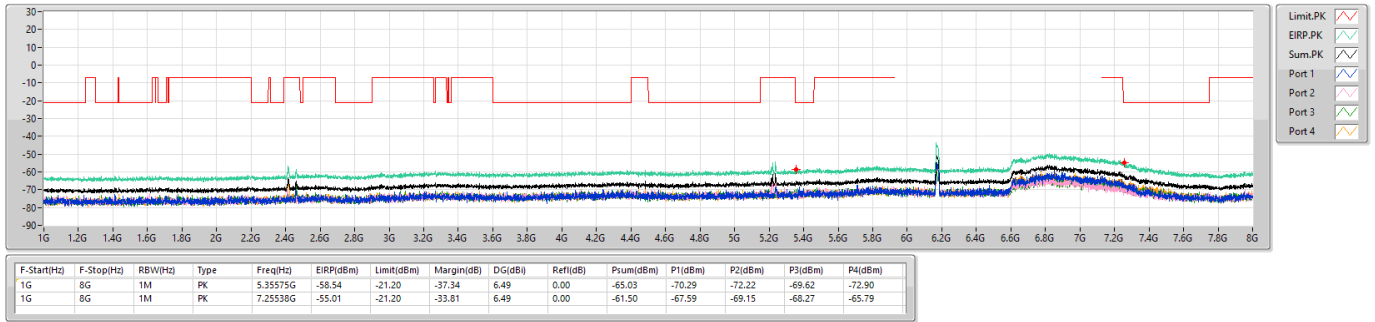


5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6175MHz

01/03/2023

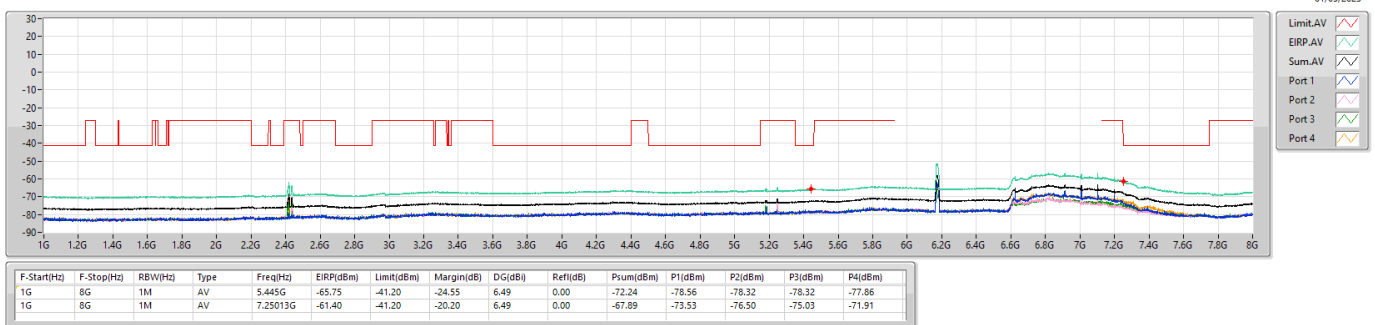


5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6415MHz

01/03/2023

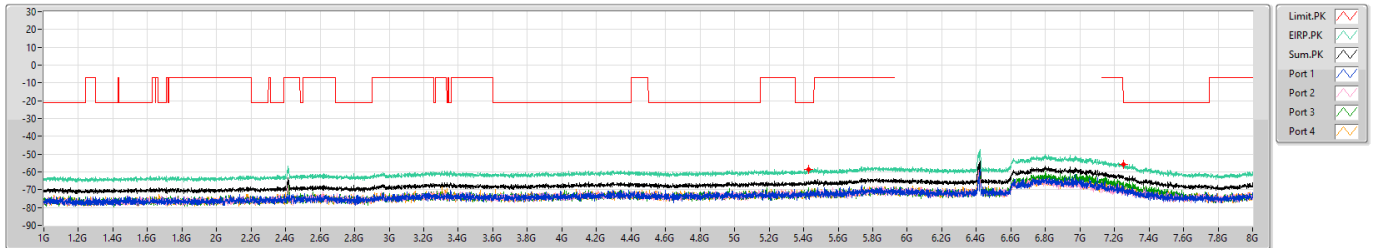


5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6415MHz

01/03/2023

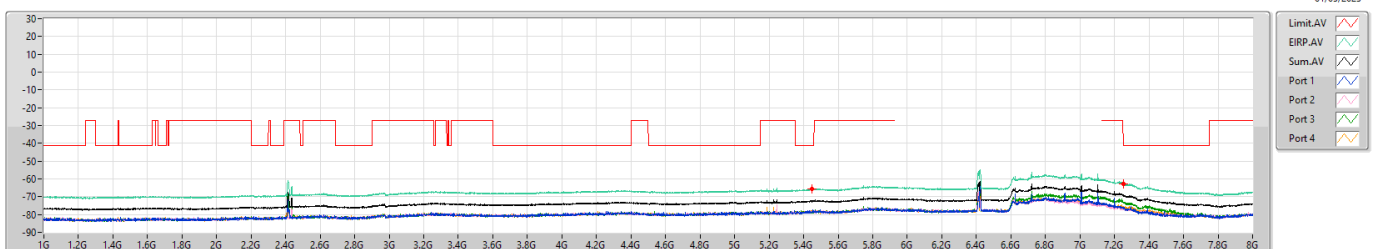


6.425-6.525GHz\_802.11ax HEW20\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6435MHz

01/03/2023

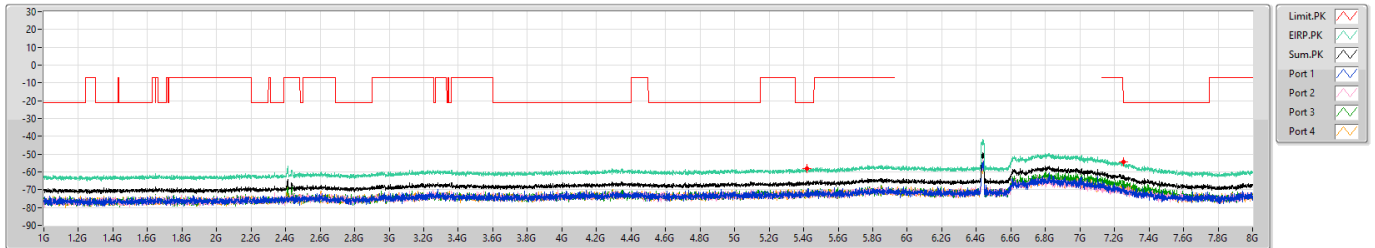


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.4205G  | -57.90    | -21.20     | -36.70     | 7.31   | 0.00     | -65.21    | -70.92  | -69.82  | -73.26  | -71.63  |
| 1G          | 8G         | 1M      | PK   | 7.251G   | -54.59    | -21.20     | -33.39     | 7.31   | 0.00     | -61.90    | -69.80  | -69.91  | -65.06  | -68.95  |

6.425-6.525GHz\_802.11ax HEW20\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6435MHz

01/03/2023

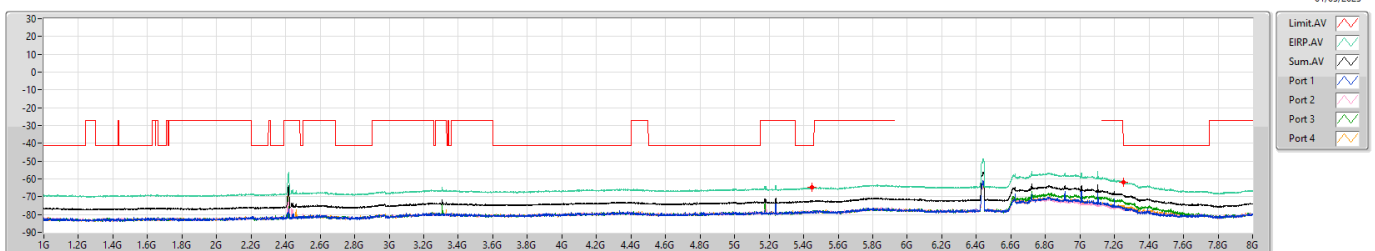


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.4485G  | -64.90    | -41.20     | -23.70     | 7.31   | 0.00     | -72.21    | -78.06  | -78.06  | -78.53  | -78.29  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -61.84    | -41.20     | -20.64     | 7.31   | 0.00     | -69.15    | -76.62  | -76.62  | -72.83  | -75.84  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6475MHz

01/03/2023

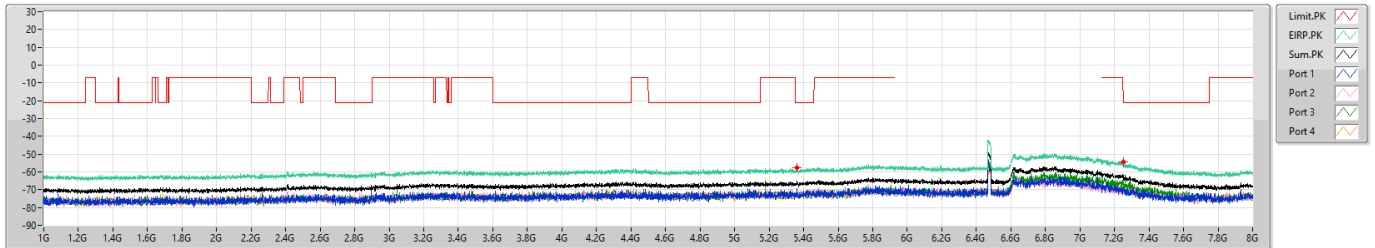


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.36275G | -57.87    | -21.20     | -36.67     | 7.31   | 0.00     | -65.18    | -71.36  | -70.34  | -71.66  | -71.56  |
| 1G          | 8G         | 1M      | PK   | 7.25188G | -54.58    | -21.20     | -33.38     | 7.31   | 0.00     | -61.89    | -68.91  | -71.17  | -65.50  | -67.96  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6475MHz

01/03/2023

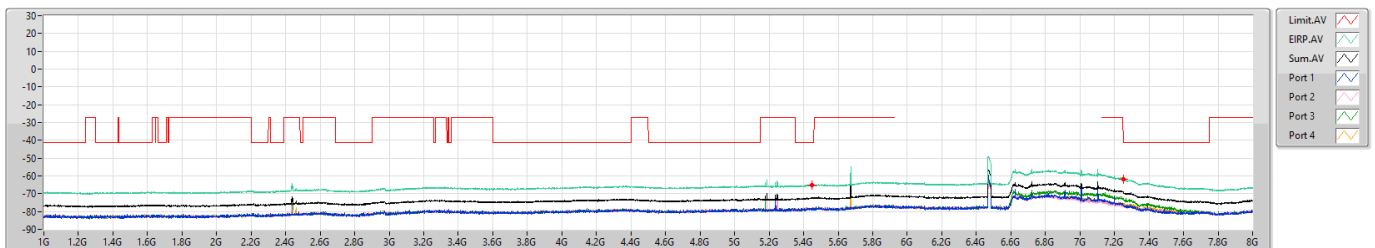


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.4485G  | -65.02    | -41.20     | -23.82     | 7.31   | 0.00     | -72.33    | -78.29  | -78.53  | -78.06  | -78.53  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -61.82    | -41.20     | -20.62     | 7.31   | 0.00     | -69.13    | -76.73  | -76.28  | -72.83  | -75.95  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6515MHz

02/03/2023

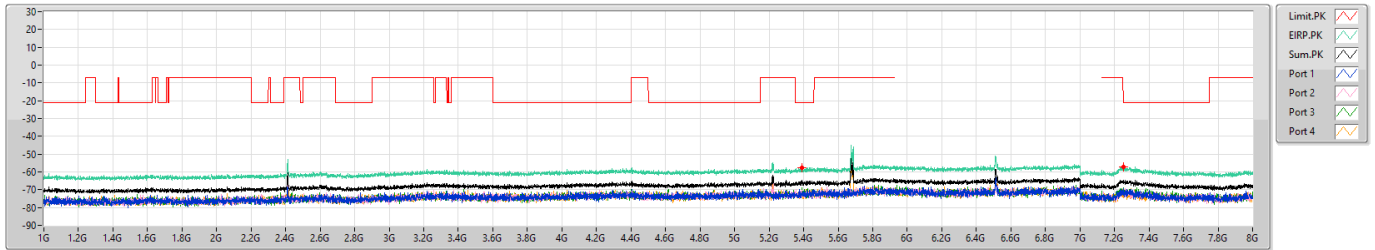


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.389G   | -57.45    | -21.20     | -36.25     | 7.31   | 0.00     | -64.76    | -72.85  | -70.39  | -68.91  | -72.06  |
| 1G          | 8G         | 1M      | PK   | 7.25363G | -57.18    | -21.20     | -35.98     | 7.31   | 0.00     | -64.49    | -69.39  | -70.81  | -69.10  | -74.60  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6515MHz

02/03/2023

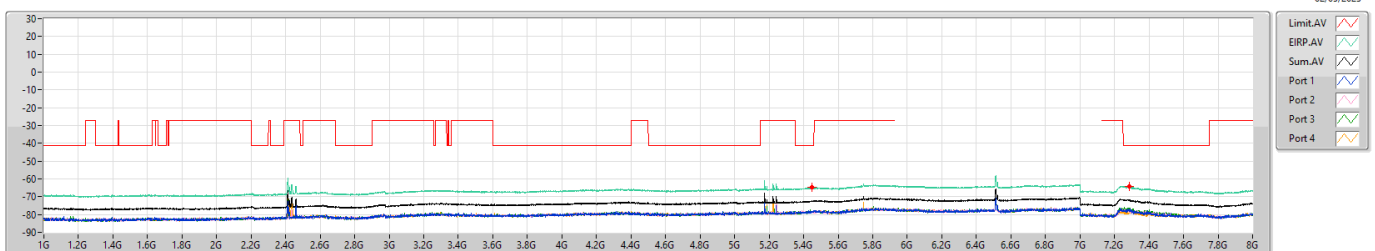


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44675G | -64.91    | -41.20     | -23.71     | 7.31   | 0.00     | -72.22    | -78.07  | -78.31  | -78.54  | -78.07  |
| 1G          | 8G         | 1M      | AV   | 7.28425G | -64.23    | -41.20     | -23.03     | 7.31   | 0.00     | -71.54    | -77.35  | -77.87  | -76.51  | -78.86  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6535MHz

02/03/2023

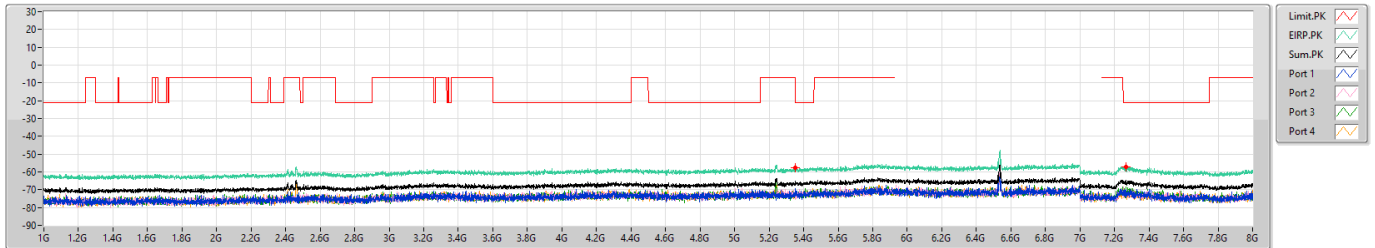


6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6535MHz

02/03/2023

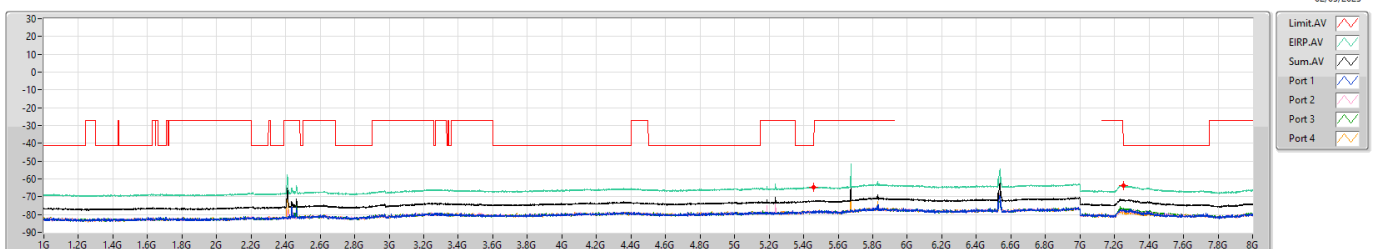


6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6695MHz

02/03/2023

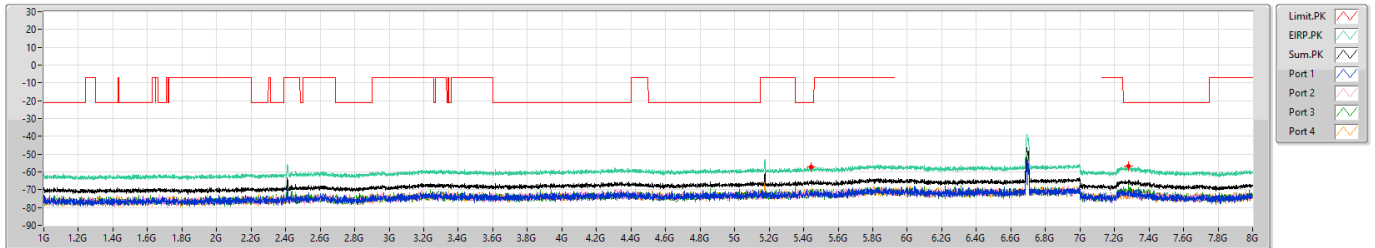


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.44238G | -57.06    | -21.20     | -35.86     | 7.65   | 0.00     | -64.71    | -71.36  | -71.36  | -70.37  | -70.00  |
| 1G          | 8G         | 1M      | PK   | 7.28075G | -56.90    | -21.20     | -35.70     | 7.65   | 0.00     | -64.55    | -70.82  | -74.08  | -67.72  | -72.23  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6695MHz

02/03/2023

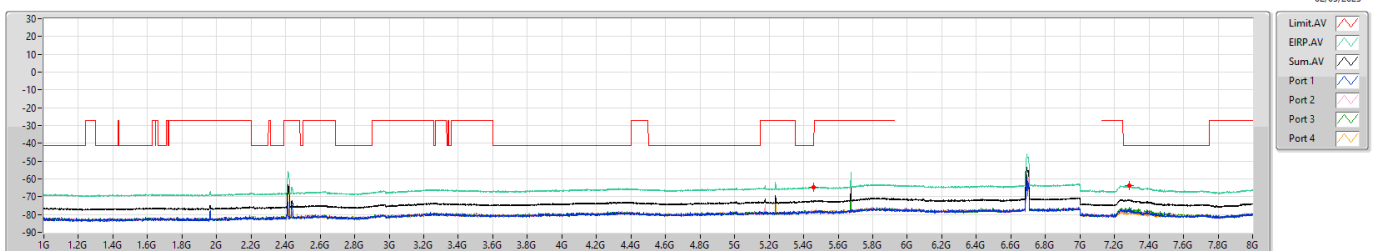


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.45638G | -64.54    | -41.20     | -23.34     | 7.65   | 0.00     | -72.19    | -78.51  | -77.82  | -78.51  | -78.04  |
| 1G          | 8G         | 1M      | AV   | 7.28688G | -63.94    | -41.20     | -22.74     | 7.65   | 0.00     | -71.59    | -77.87  | -78.28  | -76.07  | -78.71  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6855MHz

02/03/2023

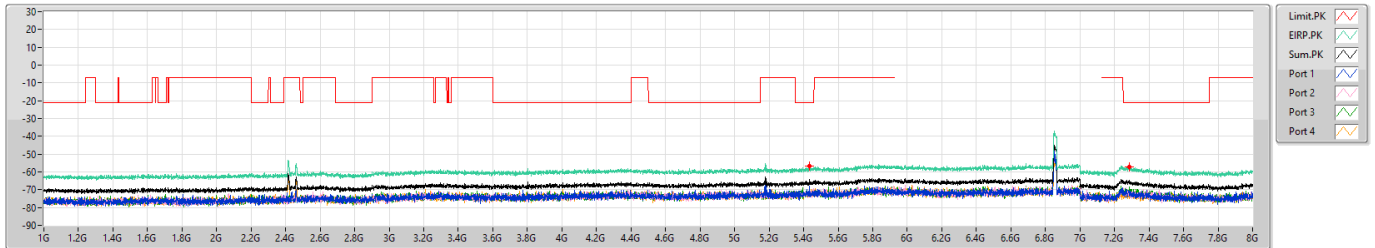


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.43275G | -56.68    | -21.20     | -35.48     | 7.65   | 0.00    | -64.33    | -67.95  | -70.73  | -71.86  | -72.31  |
| 1G          | 8G         | 1M      | PK   | 7.28513G | -57.08    | -21.20     | -35.88     | 7.65   | 0.00    | -64.73    | -72.09  | -71.43  | -68.37  | -72.44  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6855MHz

02/03/2023

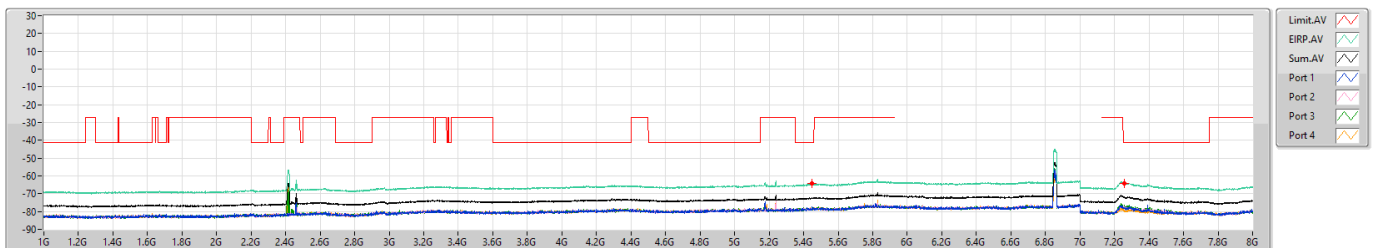


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.45025G | -64.42    | -41.20     | -23.22     | 7.65   | 0.00    | -72.07    | -77.39  | -78.52  | -78.05  | -78.52  |
| 1G          | 8G         | 1M      | AV   | 7.258G   | -64.06    | -41.20     | -22.86     | 7.65   | 0.00    | -71.71    | -78.27  | -77.47  | -76.39  | -79.31  |

6.525-6.875GHz\_802.11ax HEW20\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6875MHz Straddle 6.525-6.875GHz

02/03/2023

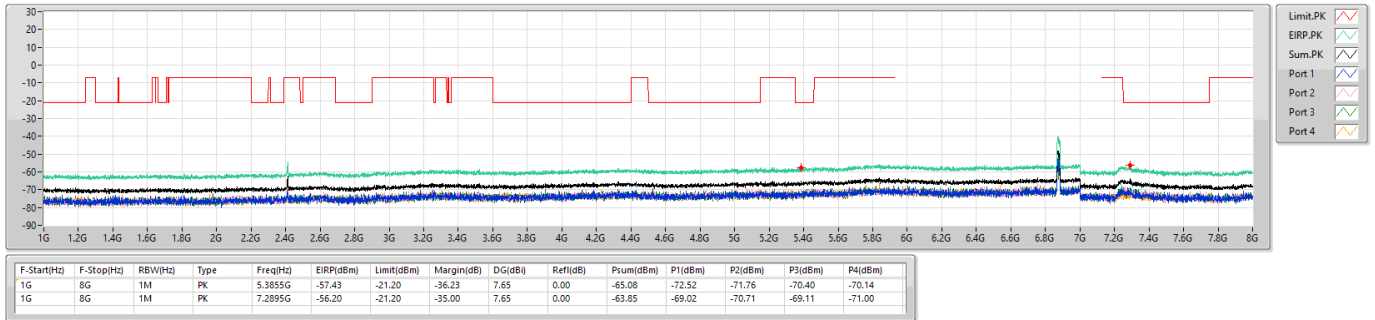


6.525-6.875GHz\_802.11ax HEW20\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6875MHz Straddle 6.525-6.875GHz

02/03/2023

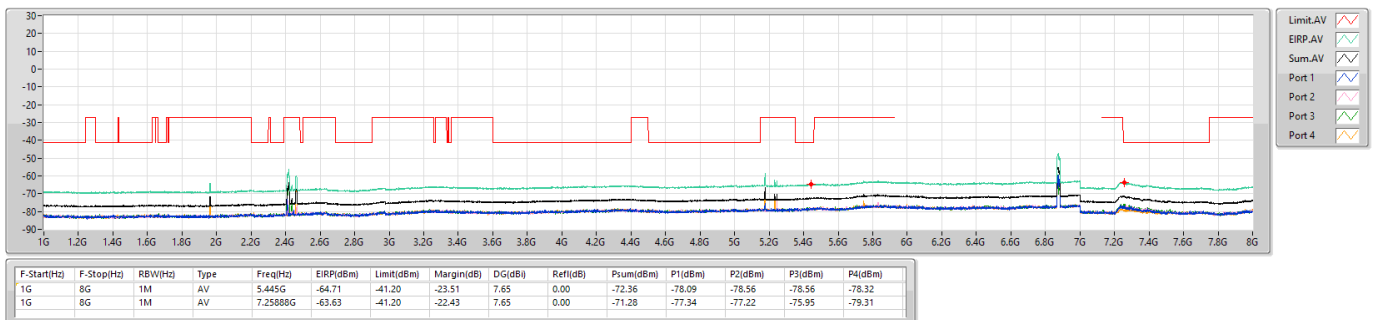


6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0).4TX

CSE Other [PK]

6895MHz

02/03/2023

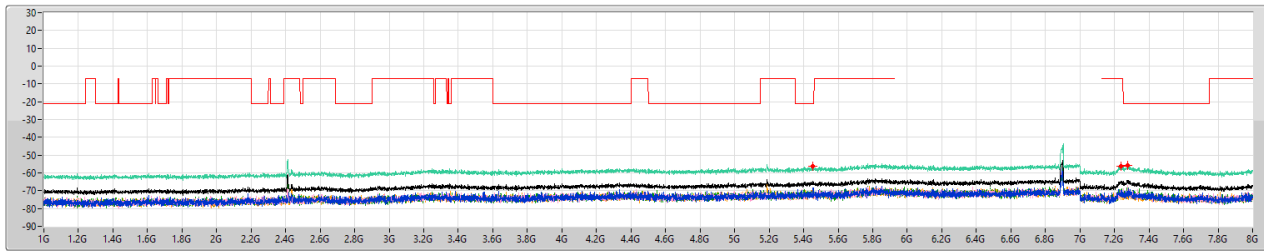


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.45463G | -56.26    | -21.20     | -35.06     | 8.32   | 0.00     | -64.58    | -68.24  | -71.62  | -70.89  | -73.16  |
| 1G          | 8G         | 1M      | PK   | 7.23963G | -56.29    | -7.00      | -49.29     | 8.32   | 0.00     | -64.61    | -69.73  | -71.20  | -69.43  | -73.05  |
| 1G          | 8G         | 1M      | PK   | 7.27813G | -55.69    | -21.20     | -34.49     | 8.32   | 0.00     | -64.01    | -72.16  | -67.20  | -70.82  | -72.02  |

6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0).4TX

CSE Other [AV]

6895MHz

02/03/2023

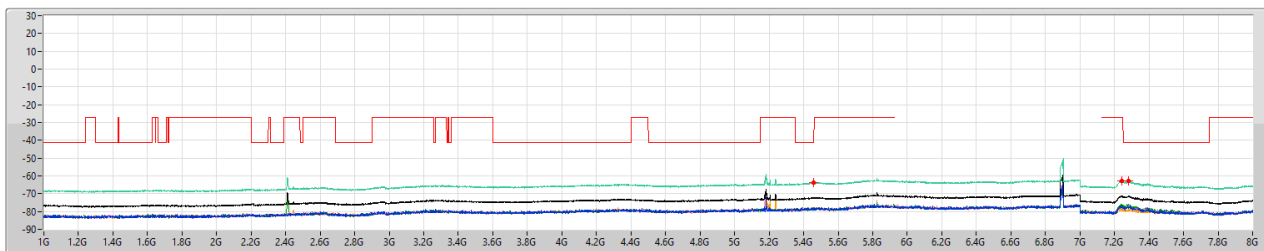


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.459G   | -65.92    | -41.20     | -22.72     | 8.32   | 0.00     | -72.34    | -78.75  | -78.51  | -77.81  | -78.04  |
| 1G          | 8G         | 1M      | AV   | 7.244G   | -62.94    | -27.00     | -35.94     | 8.32   | 0.00     | -71.26    | -76.99  | -77.75  | -75.86  | -79.17  |
| 1G          | 8G         | 1M      | AV   | 7.28163G | -62.87    | -41.20     | -21.67     | 8.32   | 0.00     | -71.19    | -77.35  | -77.61  | -75.96  | -78.28  |

6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0).4TX

CSE Other [PK]

6995MHz

02/03/2023

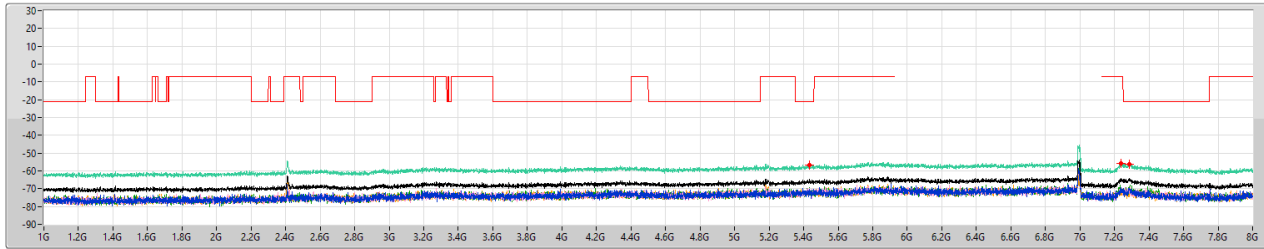


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.43363G | -56.55    | -21.20     | -35.35     | 8.32   | 0.00     | -64.87    | -70.34  | -69.98  | -72.54  | -71.12  |
| 1G          | 8G         | 1M      | PK   | 7.23786G | -55.82    | -7.00      | -48.82     | 8.32   | 0.00     | -64.14    | -69.36  | -69.23  | -70.17  | -72.61  |
| 1G          | 8G         | 1M      | PK   | 7.286G   | -56.07    | -21.20     | -34.87     | 8.32   | 0.00     | -64.39    | -70.94  | -71.25  | -69.46  | -70.20  |

6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0).4TX

CSE Other [AV]

6995MHz

02/03/2023

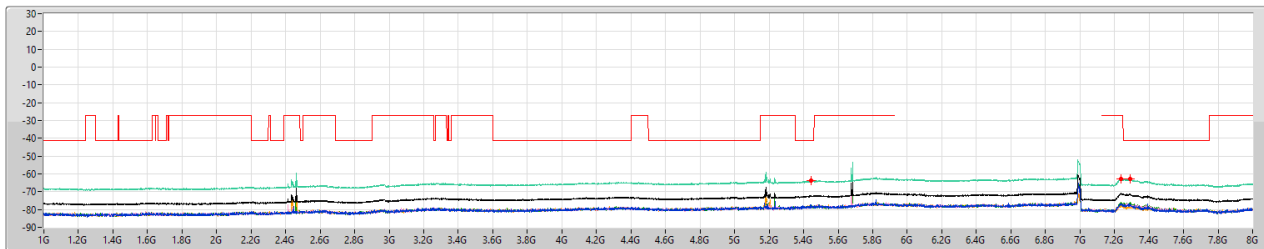



| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.445G   | -65.96    | -41.20     | -22.76     | 8.32   | 0.00     | -72.28    | -77.43  | -76.80  | -76.32  | -78.80  |
| 1G          | 8G         | 1M      | AV   | 7.23875G | -62.60    | -27.00     | -35.60     | 8.32   | 0.00     | -70.92    | -76.99  | -77.01  | -75.98  | -78.17  |
| 1G          | 8G         | 1M      | AV   | 7.293G   | -65.01    | -41.20     | -21.81     | 8.32   | 0.00     | -71.33    | -78.01  | -78.01  | -76.07  | -77.61  |

6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0).4TX

CSE Other [PK]

7095MHz

02/03/2023

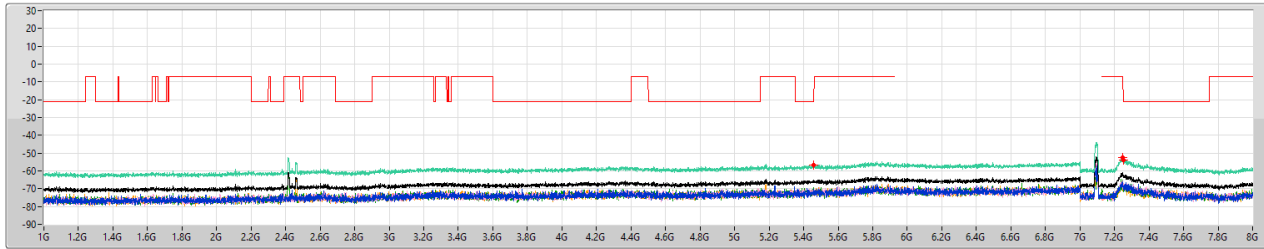



| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.4555G  | -56.89    | -21.20     | -35.69     | 8.32   | 0.00     | -65.21    | -73.42  | -72.06  | -69.50  | -70.89  |
| 1G          | 8G         | 1M      | PK   | 7.2475G  | -52.60    | -7.00      | -45.60     | 8.32   | 0.00     | -60.92    | -67.88  | -66.34  | -65.28  | -69.30  |
| 1G          | 8G         | 1M      | PK   | 7.25363G | -54.03    | -21.20     | -32.83     | 8.32   | 0.00     | -62.35    | -68.86  | -66.96  | -71.74  | -67.35  |

6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0).4TX

CSE Other [AV]

7095MHz

02/03/2023

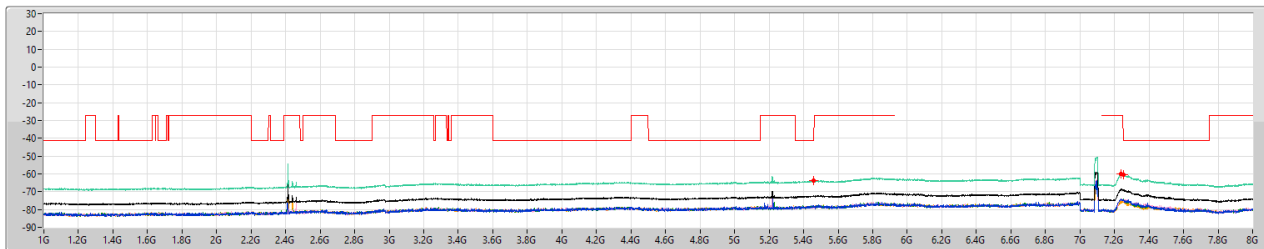


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.45988G | -65.87    | -41.20     | -22.67     | 8.32   | 0.00     | -72.19    | -77.81  | -78.27  | -78.27  | -78.51  |
| 1G          | 8G         | 1M      | AV   | 7.23963G | -60.07    | -27.00     | -33.07     | 8.32   | 0.00     | -68.39    | -74.24  | -73.98  | -74.06  | -75.36  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -60.56    | -41.20     | -19.36     | 8.32   | 0.00     | -68.88    | -74.94  | -74.94  | -74.12  | -75.74  |

5.925-6.425GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

5965MHz

01/03/2023

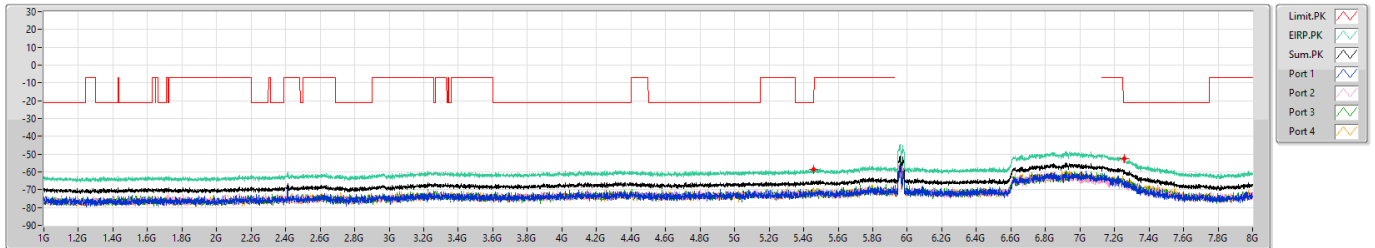


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.45638G | -58.52    | -21.20     | -37.32     | 6.49   | 0.00    | -65.01    | -72.41  | -69.76  | -71.40  | -70.99  |
| 1G          | 8G         | 1M      | PK   | 7.25888G | -52.51    | -21.20     | -31.31     | 6.49   | 0.00    | -59.00    | -64.30  | -64.91  | -64.70  | -66.45  |

5.925-6.425GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

5965MHz

01/03/2023

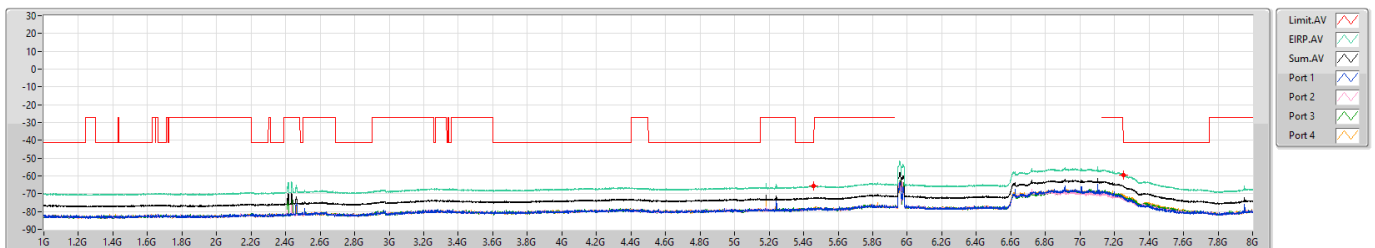


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.45813G | -65.76    | -41.20     | -24.56     | 6.49   | 0.00    | -72.25    | -78.51  | -78.27  | -78.27  | -78.04  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -59.30    | -41.20     | -18.10     | 6.49   | 0.00    | -65.79    | -71.64  | -73.13  | -71.58  | -71.13  |

5.925-6.425GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6165MHz

01/03/2023

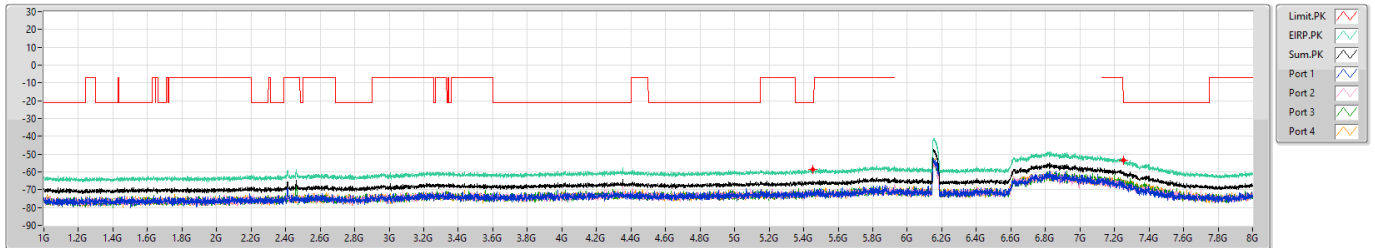


5.925-6.425GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6165MHz

01/03/2023

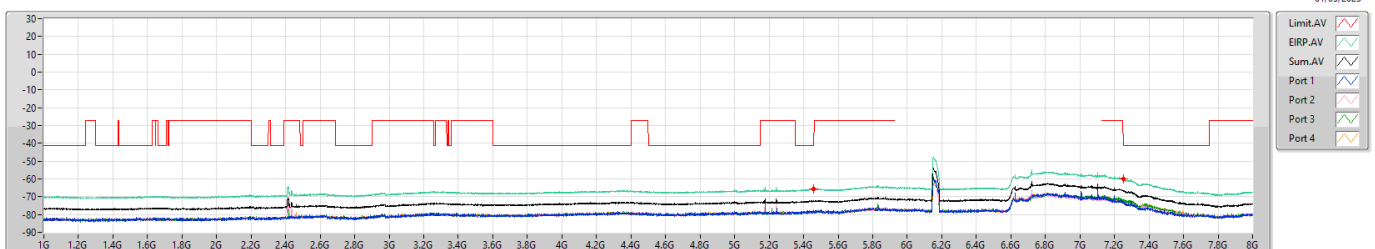


5.925-6.425GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6405MHz

01/03/2023

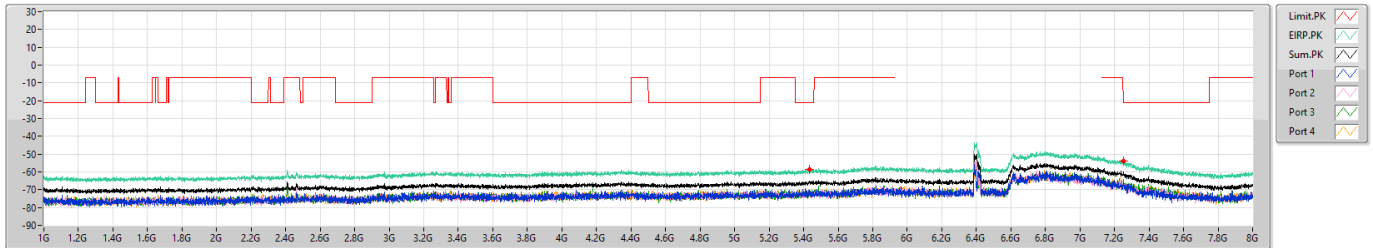


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.4345G  | -58.56    | -21.20     | -37.36     | 6.49   | 0.00     | -65.05    | -70.25  | -70.43  | -71.74  | -72.18  |
| 1G          | 8G         | 1M      | PK   | 7.251G   | -53.71    | -21.20     | -32.51     | 6.49   | 0.00     | -60.20    | -67.35  | -68.18  | -64.30  | -66.06  |

5.925-6.425GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6405MHz

01/03/2023

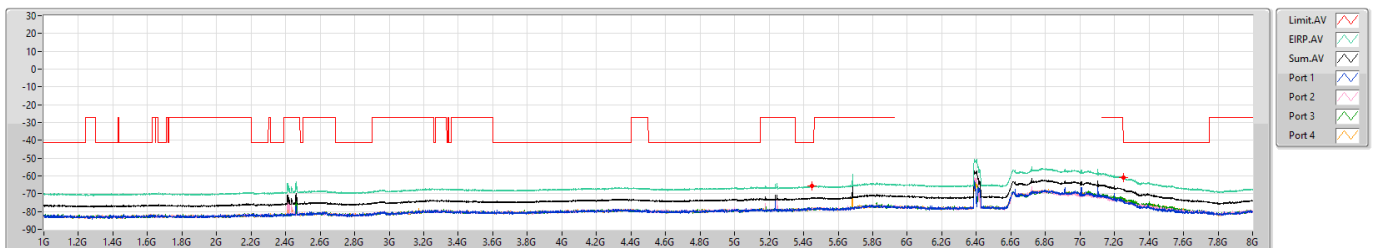


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44938G | -65.77    | -41.20     | -24.57     | 6.49   | 0.00     | -72.26    | -78.52  | -78.52  | -77.83  | -78.29  |
| 1G          | 8G         | 1M      | AV   | 7.25188G | -60.96    | -41.20     | -19.76     | 6.49   | 0.00     | -67.45    | -74.03  | -74.66  | -72.83  | -72.68  |

6.425-6.525GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6445MHz

01/03/2023

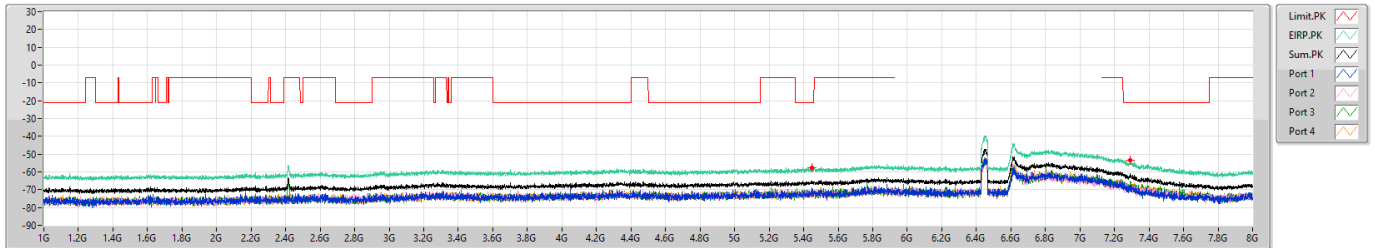


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.44763G | -57.71    | -21.20     | -36.51     | 7.31   | 0.00     | -65.02    | -70.42  | -69.53  | -72.32  | -72.67  |
| 1G          | 8G         | 1M      | PK   | 7.29125G | -53.44    | -21.20     | -32.24     | 7.31   | 0.00     | -60.75    | -67.44  | -68.69  | -66.82  | -64.98  |

6.425-6.525GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6445MHz

01/03/2023

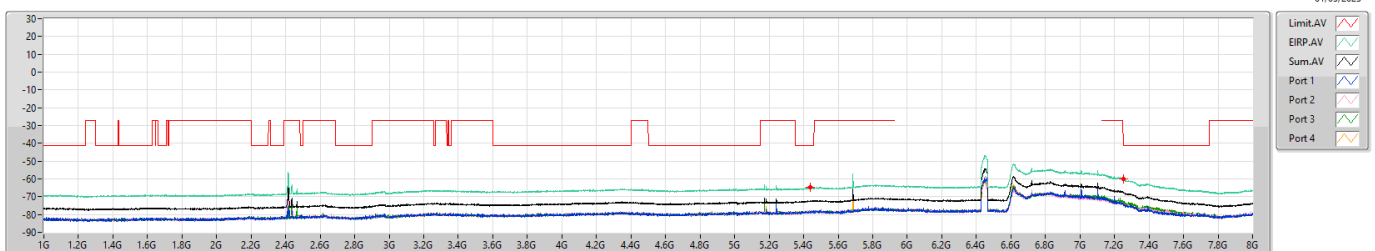


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44063G | -64.79    | -41.20     | -23.59     | 7.31   | 0.00     | -72.10    | -78.12  | -78.35  | -77.90  | -78.12  |
| 1G          | 8G         | 1M      | AV   | 7.25275G | -60.14    | -41.20     | -18.94     | 7.31   | 0.00     | -67.45    | -74.12  | -74.66  | -72.61  | -72.83  |

6.425-6.525GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6485MHz

01/03/2023

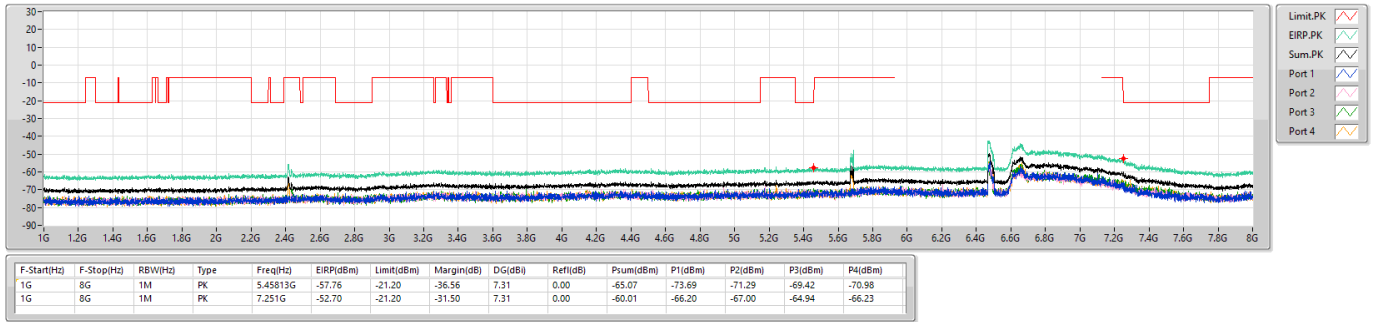


6.425-6.525GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6485MHz

01/03/2023

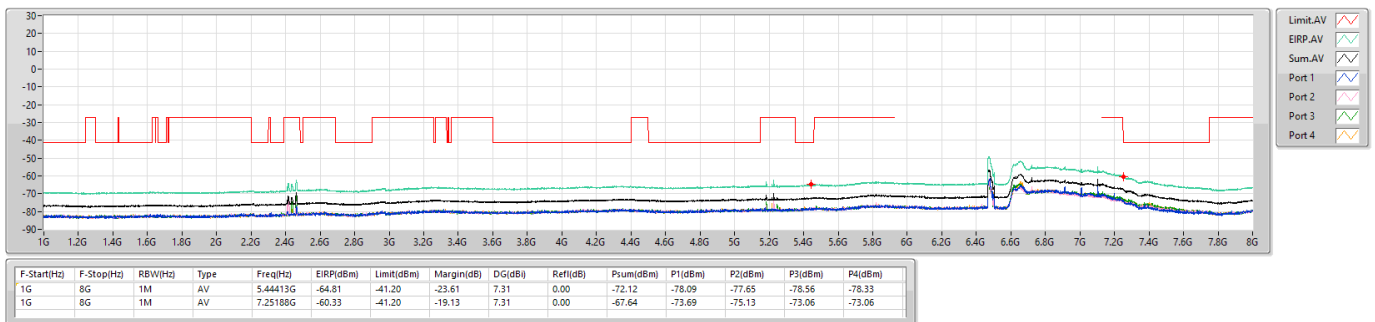


6.425-6.525GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6525MHz Straddle 6.425-6.525GHz

02/03/2023

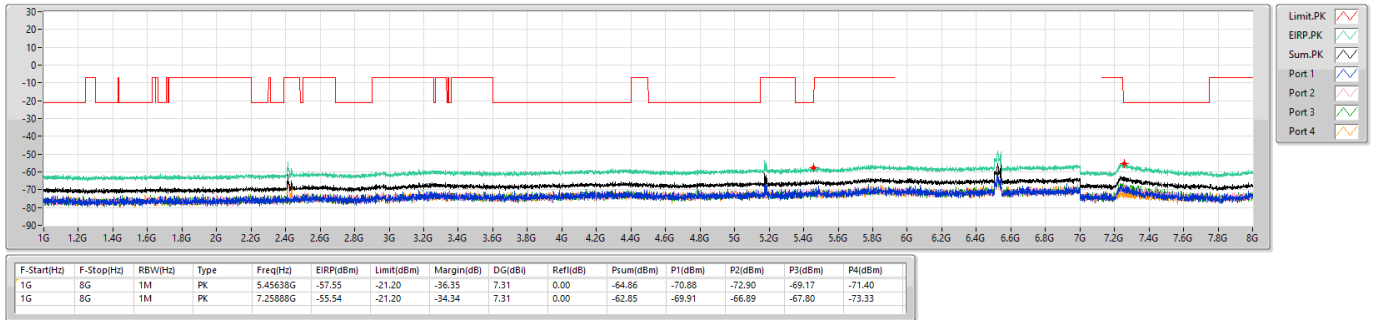


6.425-6.525GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6525MHz Straddle 6.425-6.525GHz

02/03/2023

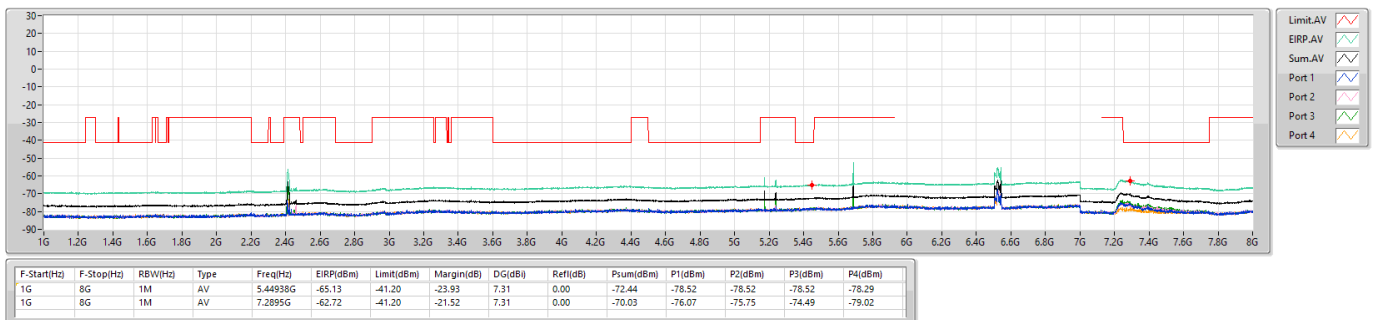


6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6565MHz

02/03/2023

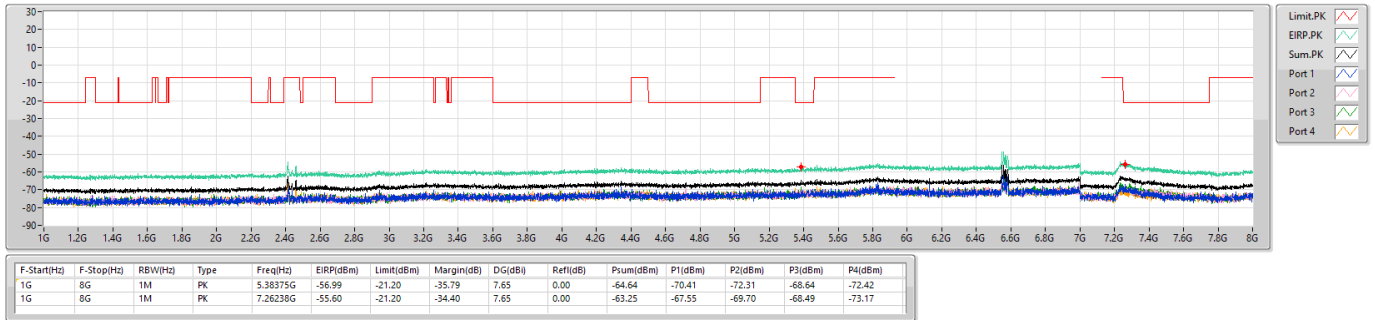


6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6565MHz

02/03/2023

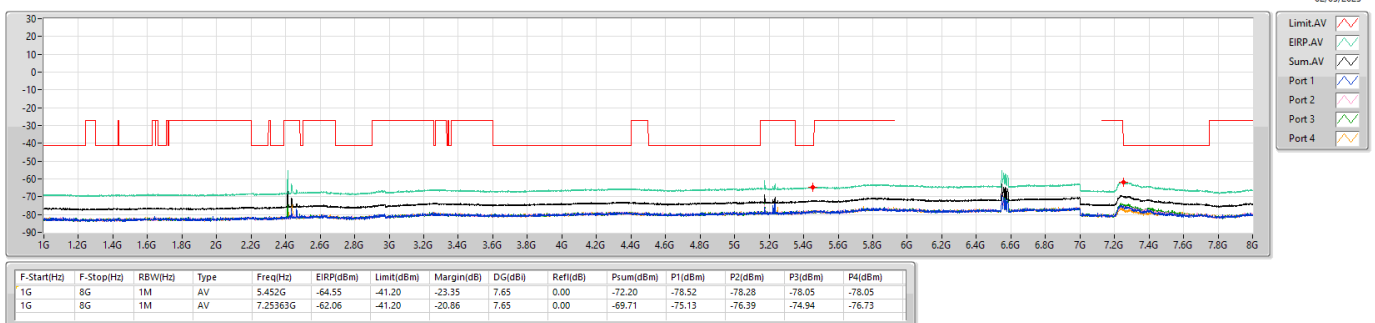


6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6685MHz

02/03/2023

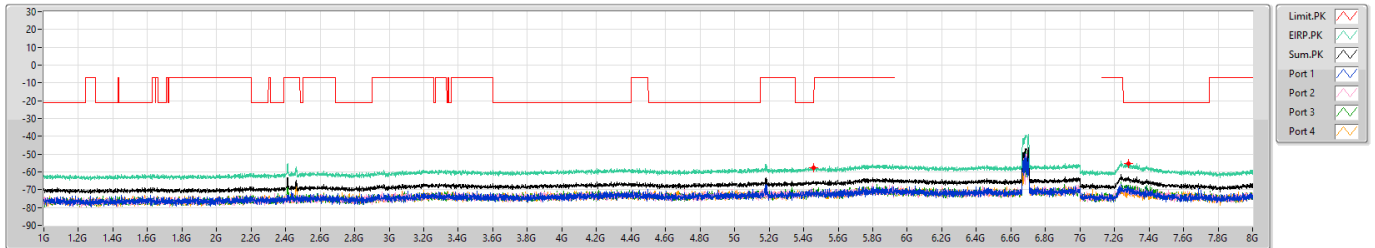


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.4555G  | -57.45    | -21.20     | -36.25     | 7.65   | 0.00    | -65.10    | -72.29  | -73.29  | -69.42  | -70.50  |
| 1G          | 8G         | 1M      | PK   | 7.28075G | -55.17    | -21.20     | -33.97     | 7.65   | 0.00    | -62.82    | -70.08  | -68.55  | -67.44  | -69.82  |

6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6685MHz

02/03/2023

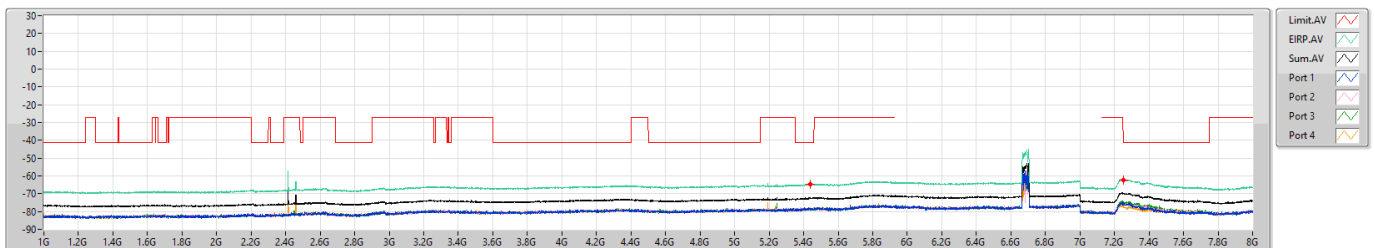


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.43713G | -64.59    | -41.20     | -23.39     | 7.65   | 0.00    | -72.24    | -78.62  | -78.38  | -78.15  | -77.92  |
| 1G          | 8G         | 1M      | AV   | 7.251G   | -62.20    | -41.20     | -21.00     | 7.65   | 0.00    | -69.85    | -76.28  | -75.84  | -74.94  | -76.62  |

6.525-6.875GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6845MHz

02/03/2023

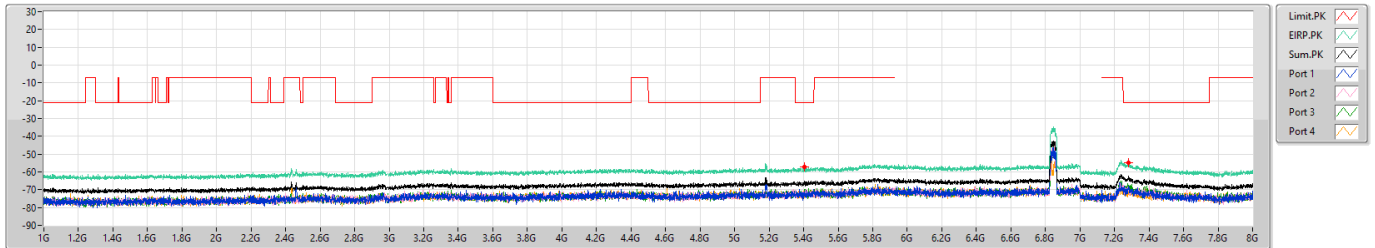


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.403G   | -57.33    | -21.20     | -36.13     | 7.65   | 0.00    | -64.98    | -71.25  | -72.31  | -70.31  | -70.40  |
| 1G          | 8G         | 1M      | PK   | 7.27988G | -54.89    | -21.20     | -33.69     | 7.65   | 0.00    | -62.54    | -68.15  | -68.87  | -68.41  | -68.87  |

6.525-6.875GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6845MHz

02/03/2023

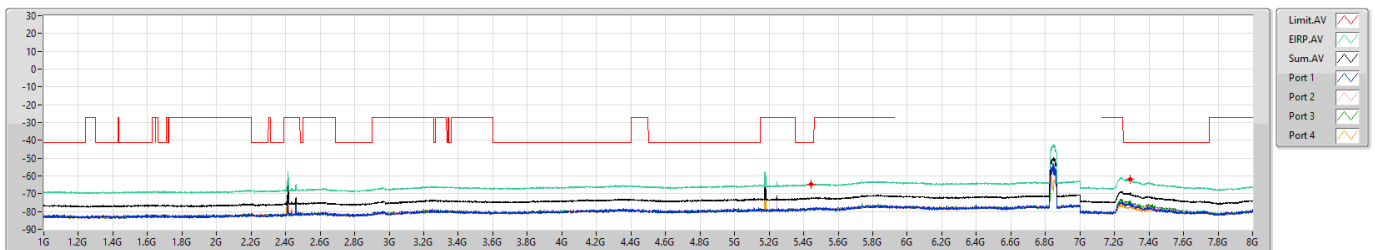


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44413G | -64.53    | -41.20     | -23.33     | 7.65   | 0.00    | -72.18    | -78.81  | -77.87  | -77.87  | -78.33  |
| 1G          | 8G         | 1M      | AV   | 7.29038G | -61.81    | -41.20     | -20.61     | 7.65   | 0.00    | -69.46    | -76.07  | -76.18  | -73.88  | -76.29  |

6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6885MHz Straddle 6.525-6.875GHz

02/03/2023

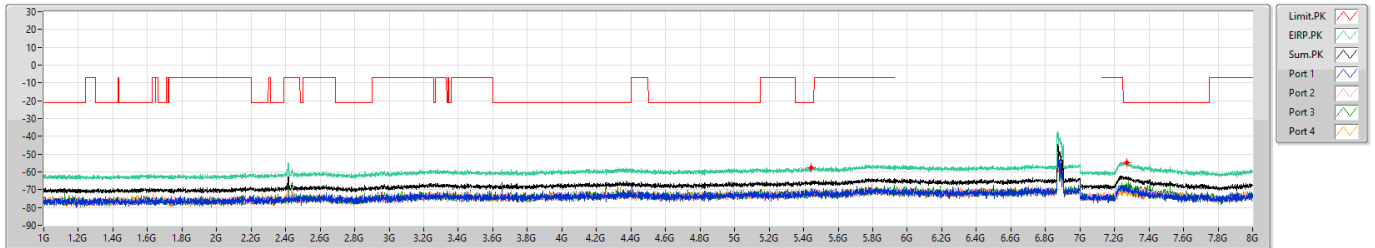


6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6885MHz Straddle 6.525-6.875GHz

02/03/2023

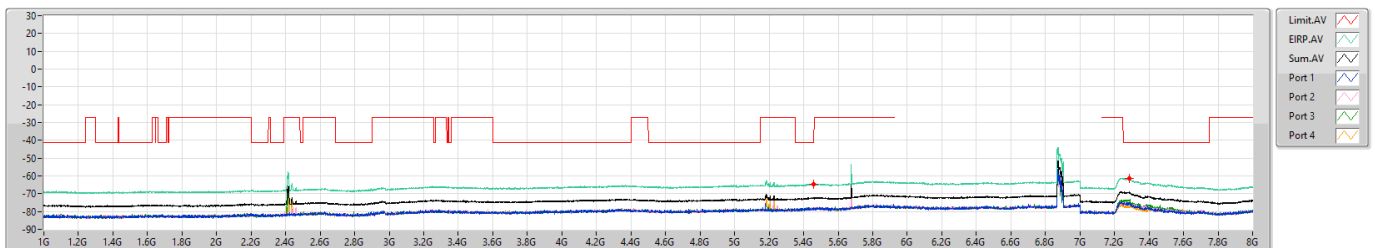


6.875-7.125GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6925MHz

02/03/2023

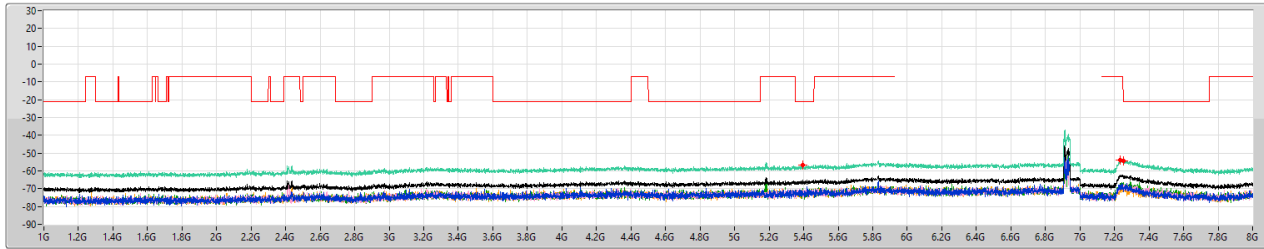


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.396G   | -56.70    | -21.20     | -35.50     | 8.32   | 0.00     | -65.02    | -71.81  | -70.81  | -70.53  | -71.10  |
| 1G          | 8G         | 1M      | PK   | 7.2335G  | -53.85    | -7.00      | -46.85     | 8.32   | 0.00     | -62.17    | -68.82  | -68.19  | -67.28  | -68.63  |
| 1G          | 8G         | 1M      | PK   | 7.25015G | -54.39    | -21.20     | -33.19     | 8.32   | 0.00     | -62.71    | -71.74  | -68.09  | -66.51  | -70.46  |

6.875-7.125GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6925MHz

02/03/2023

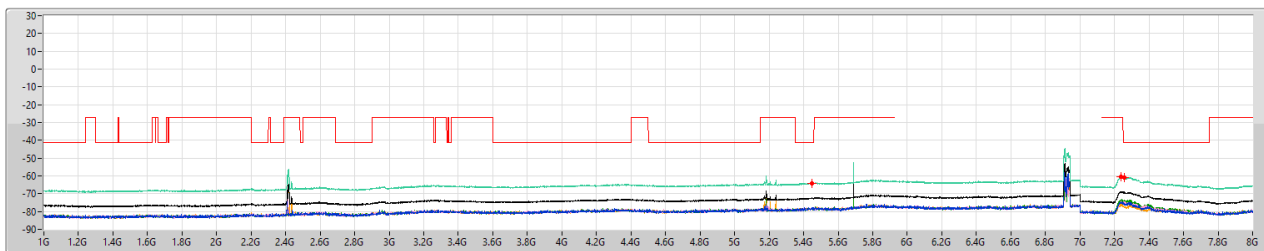


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44938G | -65.99    | -41.20     | -22.79     | 8.32   | 0.00     | -72.31    | -77.83  | -78.77  | -79.02  | -77.83  |
| 1G          | 8G         | 1M      | AV   | 7.23875G | -60.36    | -27.00     | -33.36     | 8.32   | 0.00     | -68.68    | -74.86  | -74.07  | -74.07  | -76.09  |
| 1G          | 8G         | 1M      | AV   | 7.25538G | -60.72    | -41.20     | -19.52     | 8.32   | 0.00     | -69.04    | -75.95  | -74.47  | -73.45  | -77.34  |

6.875-7.125GHz\_802.11ax HEW40\_Nss1,(MCS0).4TX

CSE Other [PK]

7005MHz

02/03/2023

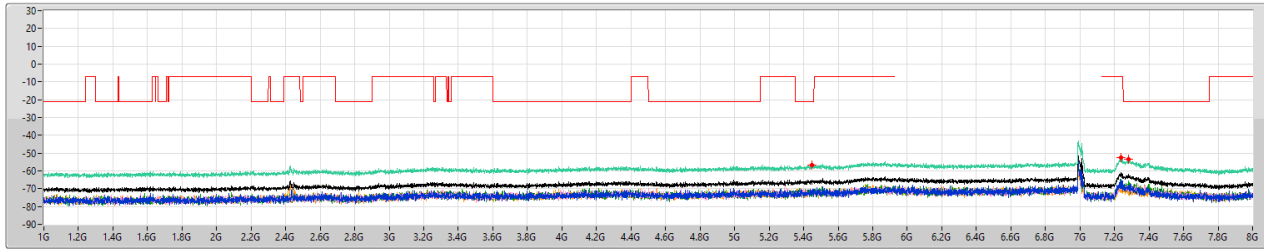


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.45025G | -56.95    | -21.20     | -35.75     | 8.32   | 0.00     | -65.27    | -71.30  | -72.07  | -71.30  | -70.60  |
| 1G          | 8G         | 1M      | PK   | 7.23613G | -52.60    | -7.00      | -45.60     | 8.32   | 0.00     | -60.92    | -64.89  | -67.71  | -66.93  | -69.49  |
| 1G          | 8G         | 1M      | PK   | 7.28075G | -53.36    | -21.20     | -32.16     | 8.32   | 0.00     | -61.68    | -65.15  | -66.10  | -65.73  | -69.82  |

6.875-7.125GHz\_802.11ax HEW40\_Nss1,(MCS0).4TX

CSE Other [AV]

7005MHz

02/03/2023

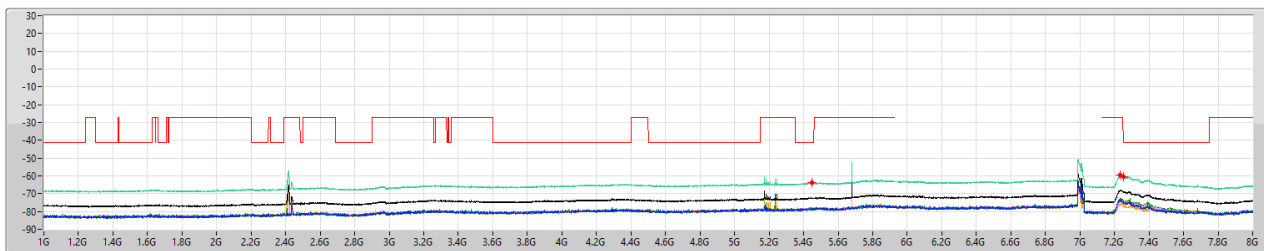



| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44588G | -63.91    | -41.20     | -22.71     | 8.32   | 0.00     | -72.23    | -77.86  | -78.31  | -78.31  | -78.55  |
| 1G          | 8G         | 1M      | AV   | 7.23438G | -59.68    | -27.00     | -32.68     | 8.32   | 0.00     | -68.00    | -73.50  | -73.66  | -73.42  | -76.00  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -60.40    | -41.20     | -19.20     | 8.32   | 0.00     | -68.72    | -74.38  | -74.94  | -73.95  | -75.95  |

6.875-7.125GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [PK]

7085MHz

02/03/2023

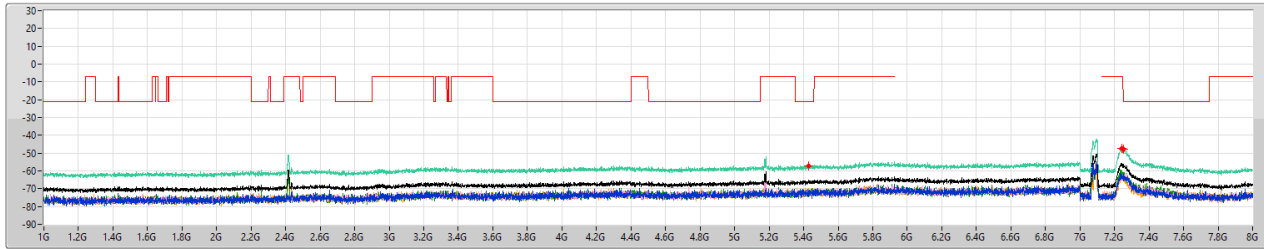



| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.431G   | -57.01    | -21.20     | -35.81     | 8.32   | 0.00     | -65.33    | -72.68  | -71.14  | -72.21  | -69.92  |
| 1G          | 8G         | 1M      | PK   | 7.24488G | -47.46    | -7.00      | -40.46     | 8.32   | 0.00     | -55.78    | -62.81  | -62.97  | -61.11  | -60.77  |
| 1G          | 8G         | 1M      | PK   | 7.25363G | -47.90    | -21.20     | -26.70     | 8.32   | 0.00     | -56.22    | -62.09  | -61.90  | -63.73  | -61.55  |

6.875-7.125GHz\_802.11ax HEW40\_Nss1,(MCS0)\_4TX

CSE Other [AV]

7085MHz

02/03/2023

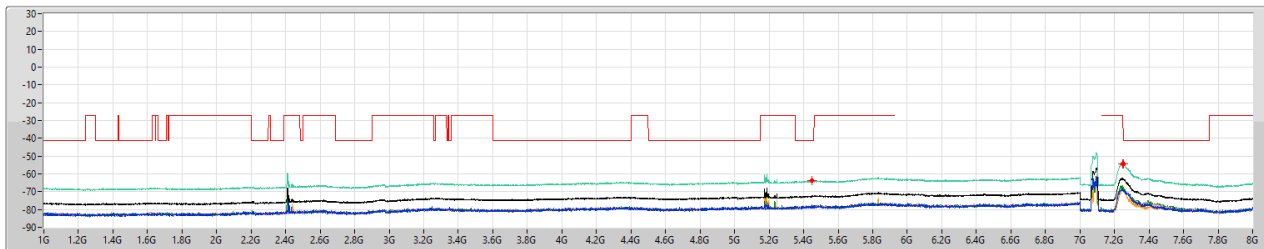


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.45025G | -63.74    | -41.20     | -22.54     | 8.32   | 0.00     | -72.06    | -77.18  | -78.52  | -78.05  | -78.76  |
| 1G          | 8G         | 1M      | AV   | 7.24575G | -54.17    | -27.00     | -27.17     | 8.32   | 0.00     | -62.49    | -68.69  | -69.42  | -66.75  | -69.89  |
| 1G          | 8G         | 1M      | AV   | 7.25015G | -54.57    | -41.20     | -13.37     | 8.32   | 0.00     | -62.89    | -69.21  | -69.21  | -67.55  | -70.09  |

5.925-6.425GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [PK]

5985MHz

01/03/2023

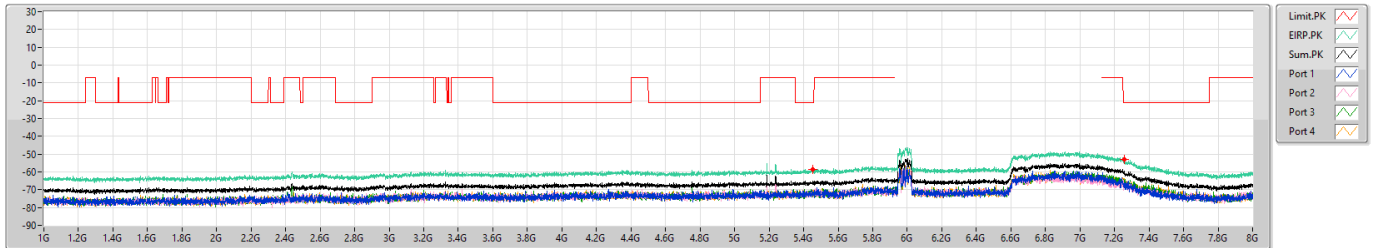


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.45463G | -58.73    | -21.20     | -37.53     | 6.49   | 0.00     | -65.22    | -71.40  | -70.89  | -72.41  | -70.50  |
| 1G          | 8G         | 1M      | PK   | 7.25713G | -53.05    | -21.20     | -31.85     | 6.49   | 0.00     | -59.54    | -67.84  | -68.01  | -64.50  | -63.63  |

5.925-6.425GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [AV]

5985MHz

01/03/2023

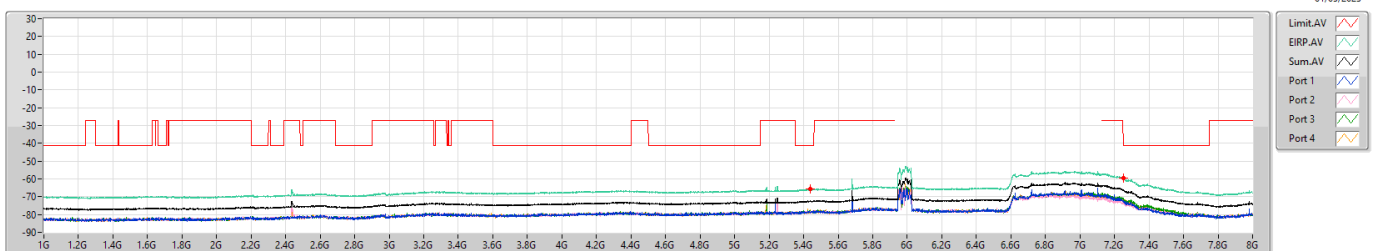


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.43888G | -65.67    | -41.20     | -24.47     | 6.49   | 0.00     | -72.16    | -78.60  | -78.13  | -77.91  | -78.13  |
| 1G          | 8G         | 1M      | AV   | 7.251G   | -59.58    | -41.20     | -18.38     | 6.49   | 0.00     | -66.07    | -72.39  | -73.69  | -71.51  | -71.20  |

5.925-6.425GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6145MHz

01/03/2023

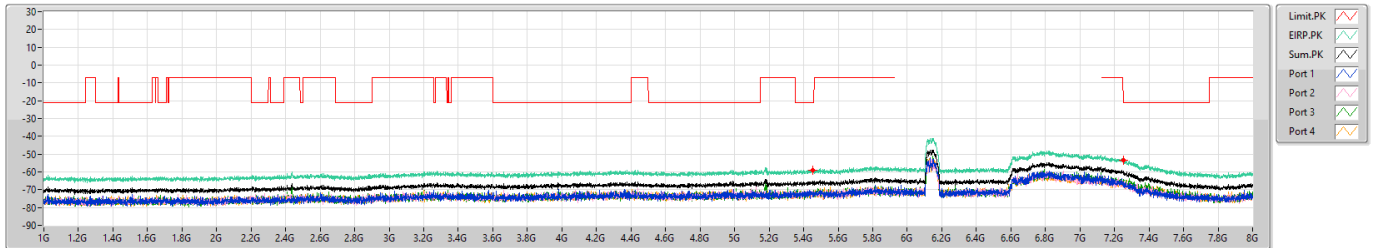


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.45113G | -58.83    | -21.20     | -37.63     | 6.49   | 0.00     | -65.32    | -71.95  | -70.79  | -71.62  | -71.09  |
| 1G          | 8G         | 1M      | PK   | 7.2545G  | -53.22    | -21.20     | -32.02     | 6.49   | 0.00     | -59.71    | -65.69  | -67.11  | -66.06  | -64.47  |

5.925-6.425GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6145MHz

01/03/2023

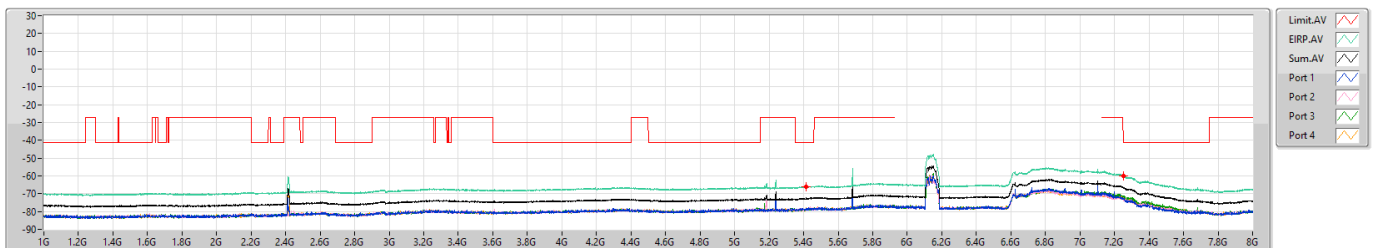


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.41438G | -65.86    | -41.20     | -24.66     | 6.49   | 0.00     | -72.35    | -78.79  | -78.79  | -78.10  | -77.88  |
| 1G          | 8G         | 1M      | AV   | 7.25275G | -59.95    | -41.20     | -18.75     | 6.49   | 0.00     | -66.44    | -72.98  | -73.21  | -71.26  | -72.68  |

5.925-6.425GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6385MHz

01/03/2023

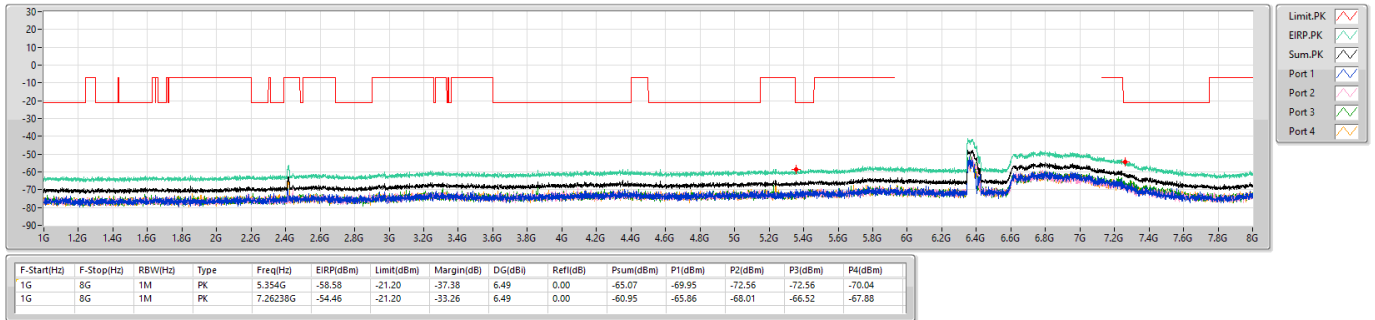


5.925-6.425GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6385MHz

01/03/2023

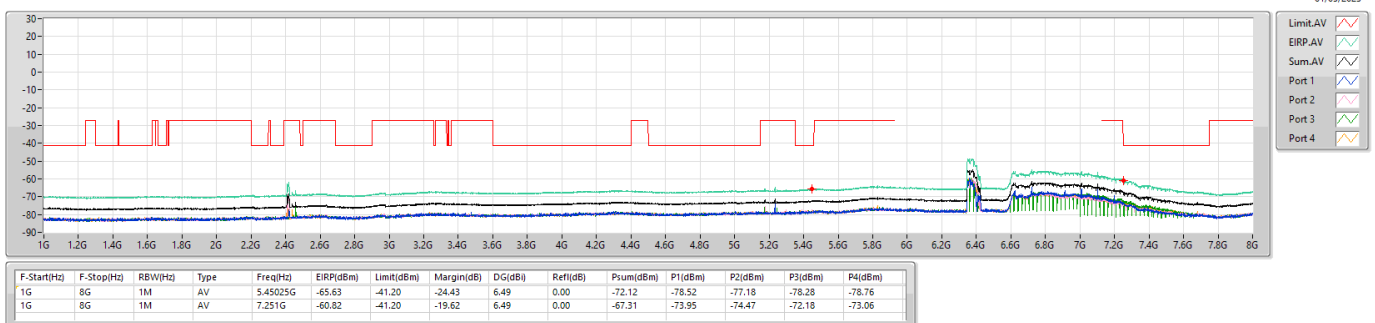


6.425-6.525GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6465MHz

01/03/2023

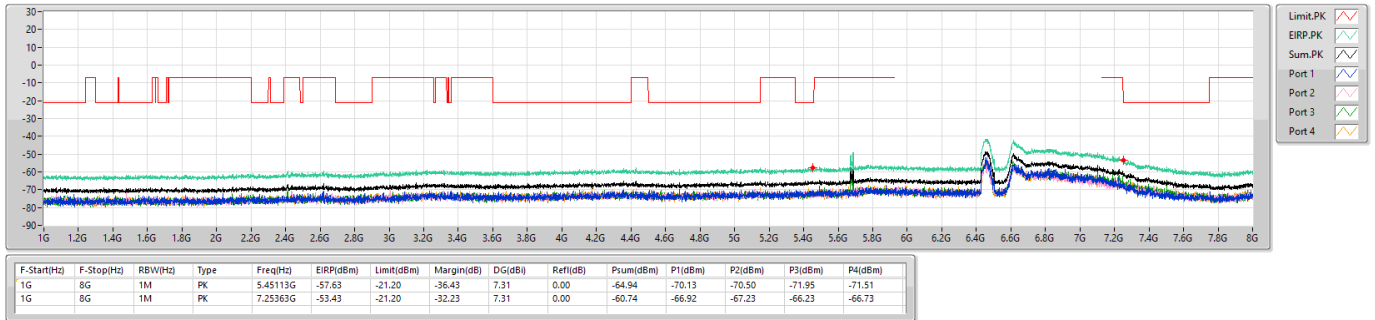


6.425-6.525GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6465MHz

01/03/2023

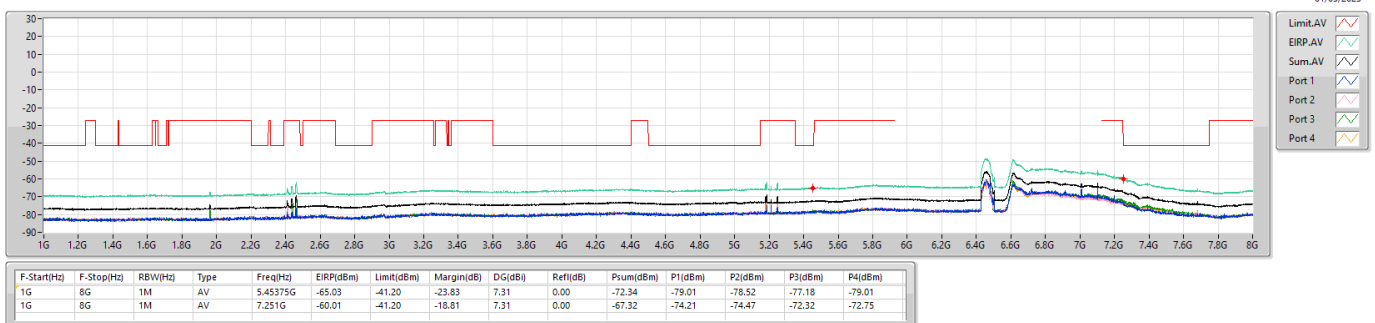


6.425-6.525GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6545MHz Straddle 6.425-6.525GHz

02/03/2023

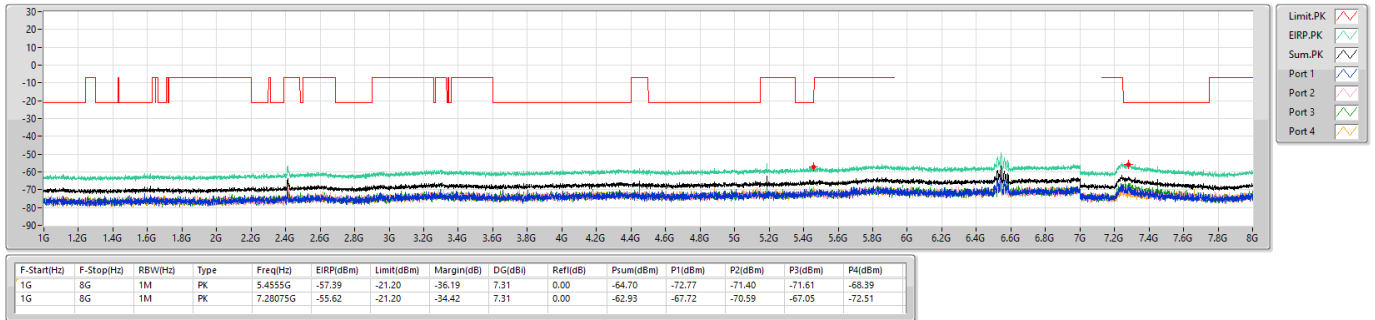


6.425-6.525GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6545MHz Straddle 6.425-6.525GHz

02/03/2023

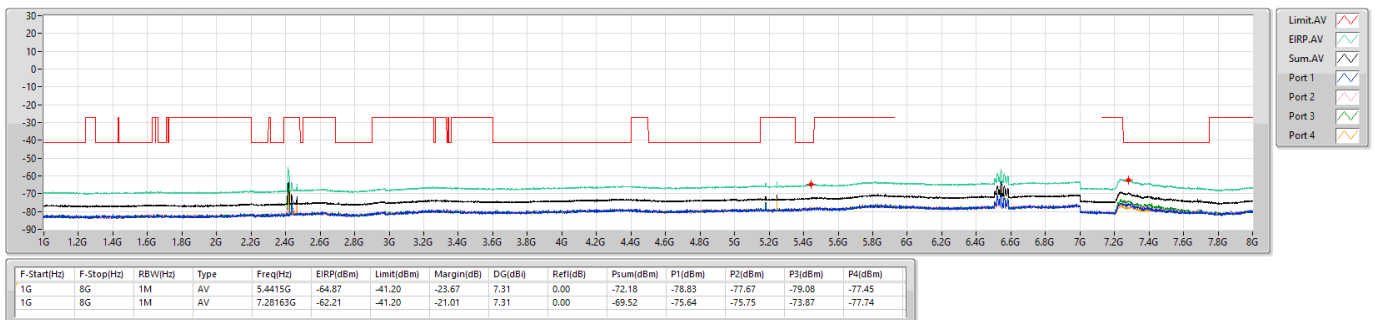


6.525-6.875GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6625MHz

02/03/2023

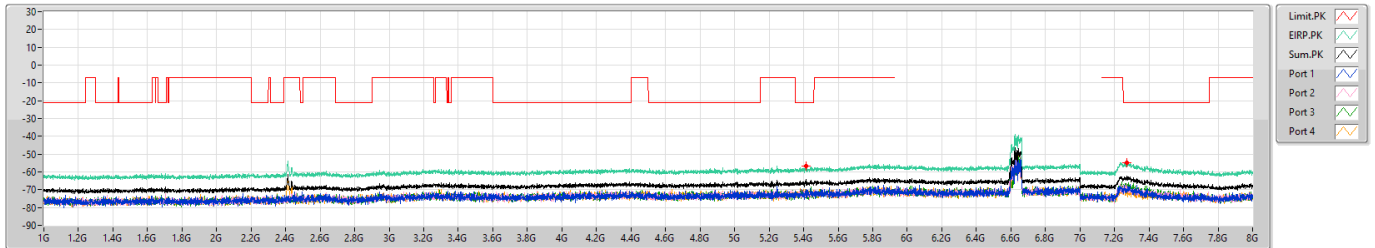


6.525-6.875GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6625MHz

02/03/2023

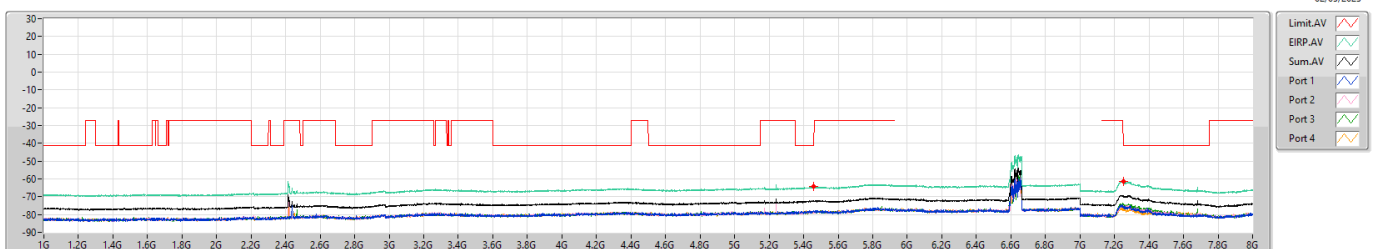


6.525-6.875GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6705MHz

02/03/2023

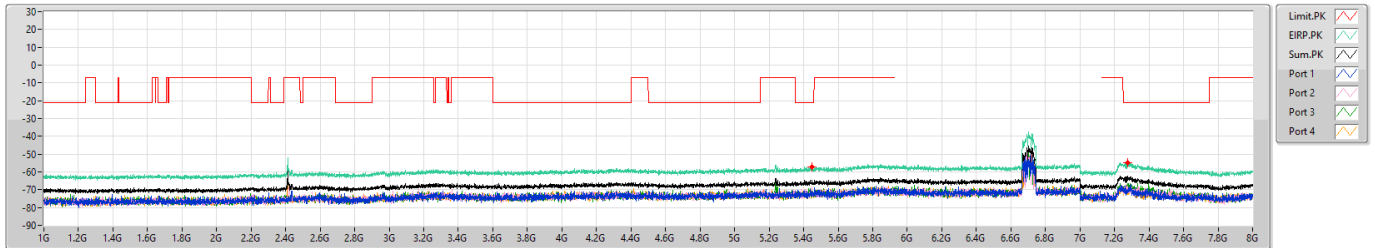


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.45025G | -57.12    | -21.20     | -35.92     | 7.65   | 0.00     | -64.77    | -71.41  | -68.25  | -71.62  | -73.70  |
| 1G          | 8G         | 1M      | PK   | 7.27638G | -54.83    | -21.20     | -33.63     | 7.65   | 0.00     | -62.48    | -70.36  | -67.97  | -66.35  | -70.88  |

6.525-6.875GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6705MHz

02/03/2023

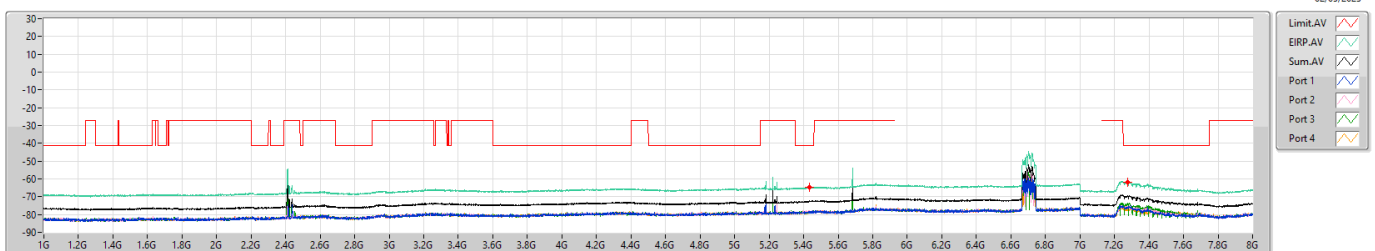


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.4345G  | -64.61    | -41.20     | -23.41     | 7.65   | 0.00     | -72.26    | -78.40  | -77.94  | -78.40  | -78.40  |
| 1G          | 8G         | 1M      | AV   | 7.27463G | -61.78    | -41.20     | -20.58     | 7.65   | 0.00     | -69.43    | -76.29  | -75.54  | -73.70  | -76.98  |

6.525-6.875GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6785MHz

02/03/2023

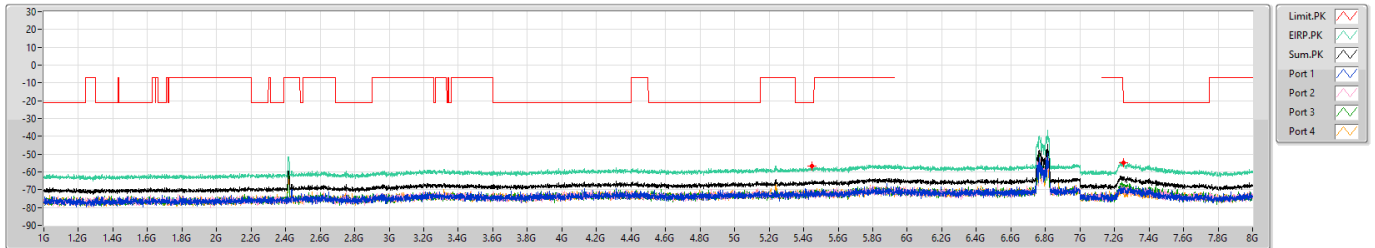


6.525-6.875GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6785MHz

02/03/2023

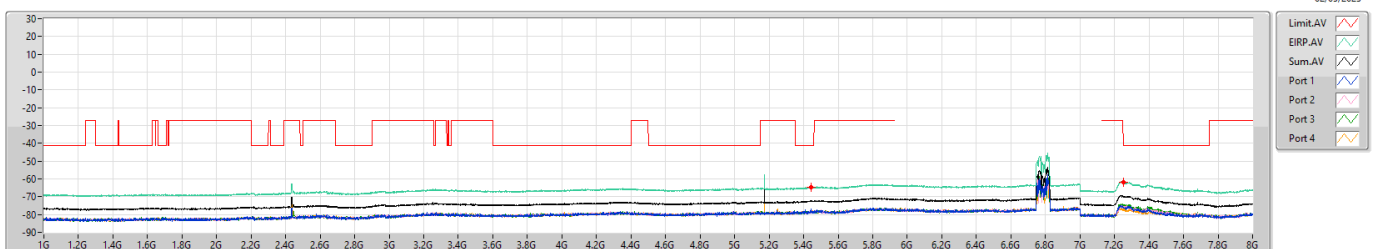


6.525-6.875GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6865MHz Straddle 6.525-6.875GHz

02/03/2023

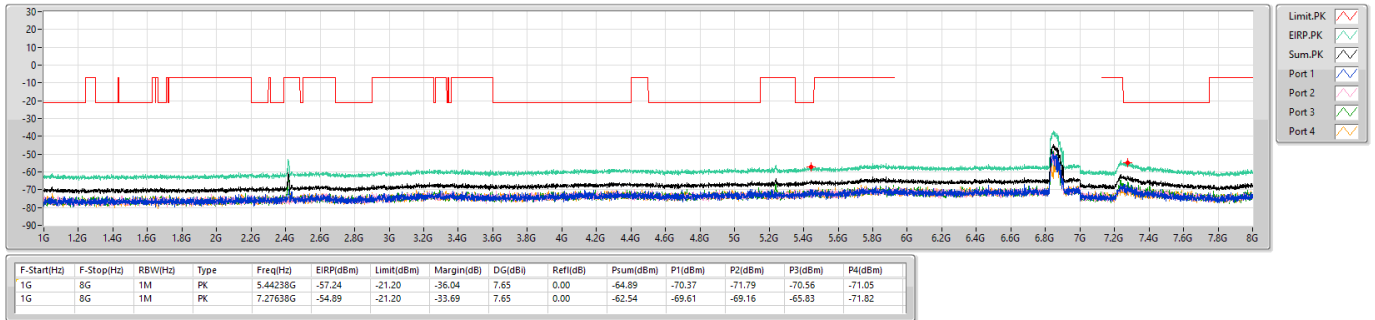


6.525-6.875GHz\_802.11ax HEW80\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6865MHz Straddle 6.525-6.875GHz

02/03/2023


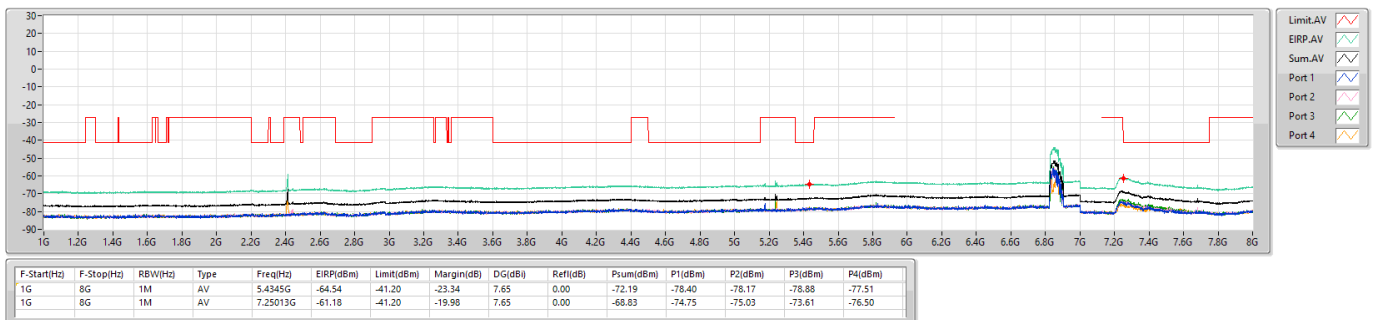


6.875-7.125GHz\_802.11ax HEW80\_Nss1,(MCS0).4TX

CSE Other [PK]

6945MHz

02/03/2023

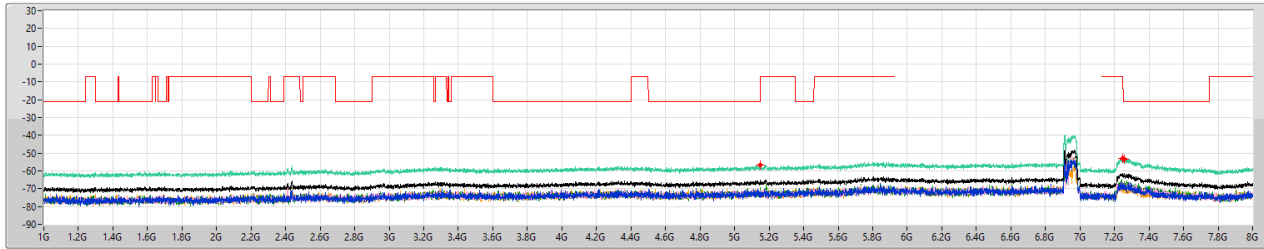



| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.1475G  | -56.81    | -21.20     | -35.61     | 8.32   | 0.00     | -65.13    | -71.96  | -71.45  | -69.60  | -72.07  |
| 1G          | 8G         | 1M      | PK   | 7.24575G | -53.14    | -7.00      | -46.14     | 8.32   | 0.00     | -61.46    | -67.93  | -66.56  | -67.52  | -68.06  |
| 1G          | 8G         | 1M      | PK   | 7.25886G | -53.27    | -21.20     | -32.07     | 8.32   | 0.00     | -61.59    | -68.27  | -67.23  | -65.89  | -70.08  |

6.875-7.125GHz\_802.11ax HEW80\_Nss1,(MCS0).4TX

CSE Other [AV]

6945MHz

02/03/2023

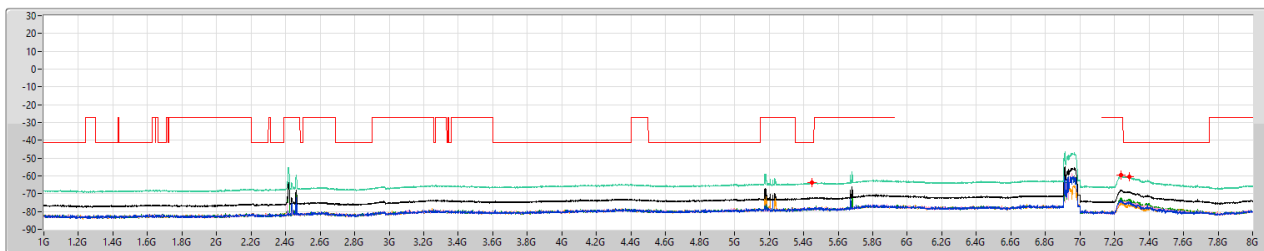


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44675G | -65.89    | -41.20     | -22.69     | 8.32   | 0.00     | -72.21    | -78.07  | -77.63  | -78.79  | -78.54  |
| 1G          | 8G         | 1M      | AV   | 7.2376G  | -59.66    | -27.00     | -32.66     | 8.32   | 0.00     | -67.98    | -74.07  | -74.25  | -72.36  | -76.10  |
| 1G          | 8G         | 1M      | AV   | 7.28775G | -60.39    | -41.20     | -19.19     | 8.32   | 0.00     | -68.71    | -75.14  | -74.86  | -73.15  | -76.40  |

6.875-7.125GHz\_802.11ax HEW80\_Nss1,(MCS0).4TX

CSE Other [PK]

7025MHz

02/03/2023

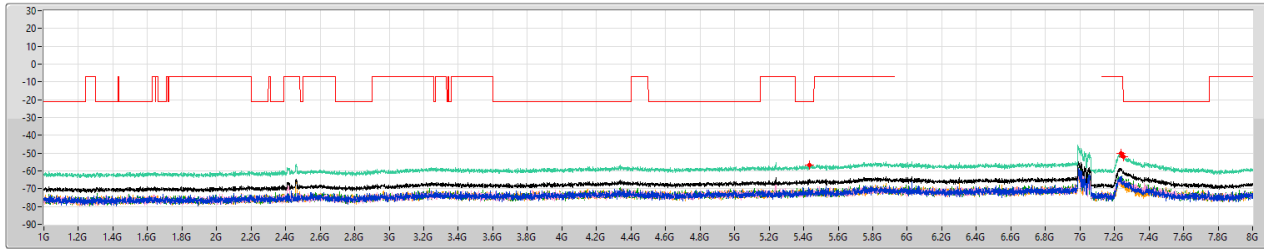


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.43538G | -56.57    | -21.20     | -35.37     | 8.32   | 0.00     | -64.89    | -70.52  | -70.15  | -72.65  | -70.71  |
| 1G          | 8G         | 1M      | PK   | 7.2376   | -50.25    | -7.00      | -43.25     | 8.32   | 0.00     | -58.57    | -63.77  | -63.77  | -64.15  | -67.83  |
| 1G          | 8G         | 1M      | PK   | 7.25015G | -51.83    | -21.20     | -30.63     | 8.32   | 0.00     | -60.15    | -66.44  | -65.72  | -64.50  | -69.34  |

6.875-7.125GHz\_802.11ax HEW80\_Nss1,(MCS0).4TX

CSE Other [AV]

7025MHz

02/03/2023

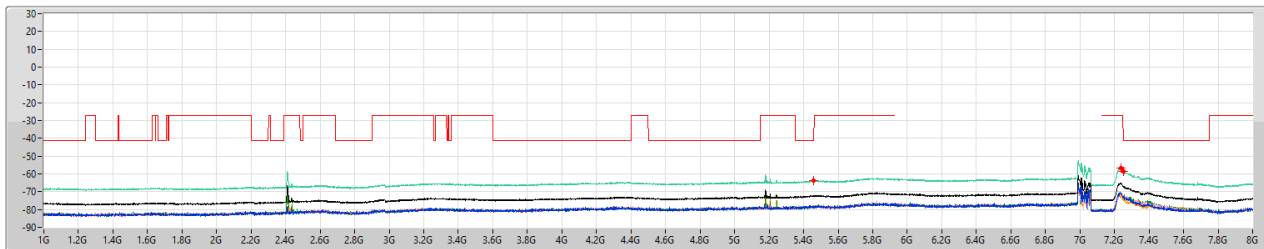


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref1(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.45813G | -63.86    | -41.20     | -22.66     | 8.32   | 0.00     | -72.18    | -78.51  | -78.04  | -78.75  | -77.59  |
| 1G          | 8G         | 1M      | AV   | 7.2376   | -56.90    | -27.00     | -29.90     | 8.32   | 0.00     | -65.22    | -71.42  | -70.99  | -70.64  | -72.02  |
| 1G          | 8G         | 1M      | AV   | 7.25015G | -58.49    | -41.20     | -17.29     | 8.32   | 0.00     | -66.61    | -72.83  | -72.46  | -72.46  | -73.69  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MC50)\_4TX

CSE Other [PK]

6025MHz

01/03/2023

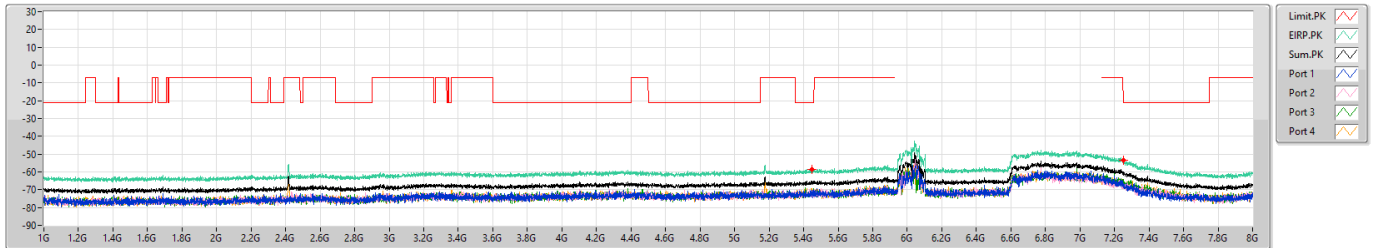


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.44938G | -58.43    | -21.20     | -37.23     | 6.49   | 0.00     | -64.92    | -73.04  | -71.00  | -70.80  | -69.60  |
| 1G          | 8G         | 1M      | PK   | 7.25188G | -53.49    | -21.20     | -32.29     | 6.49   | 0.00     | -59.98    | -66.66  | -67.67  | -64.13  | -66.34  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MC50)\_4TX

CSE Other [AV]

6025MHz

01/03/2023

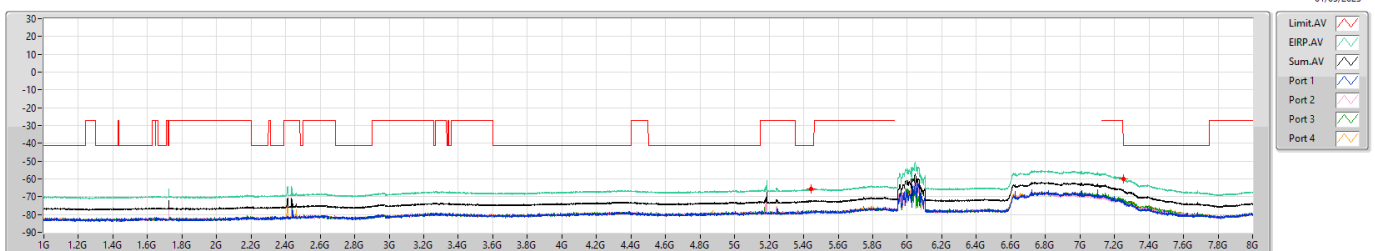


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44413G | -65.81    | -41.20     | -24.61     | 6.49   | 0.00     | -72.30    | -77.65  | -78.33  | -78.56  | -78.81  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -59.82    | -41.20     | -18.62     | 6.49   | 0.00     | -66.31    | -73.21  | -73.61  | -71.32  | -71.64  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6185MHz

01/03/2023

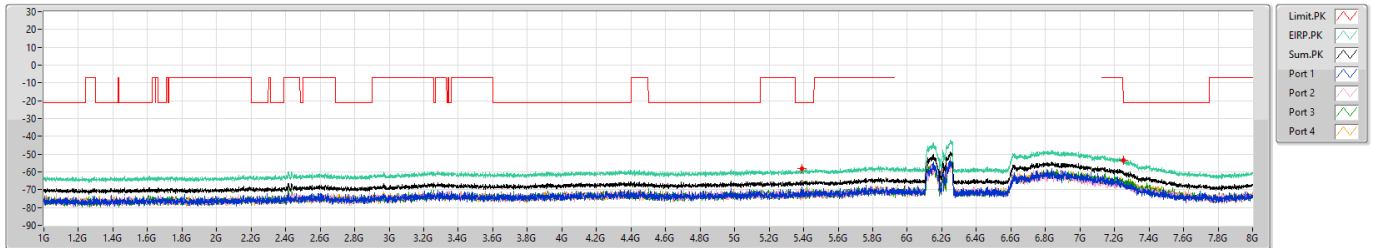


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.39163G | -58.24    | -21.20     | -37.04     | 6.49   | 0.00    | -64.73    | -68.52  | -72.61  | -70.65  | -72.61  |
| 1G          | 8G         | 1M      | PK   | 7.25188G | -53.49    | -21.20     | -32.29     | 6.49   | 0.00    | -59.98    | -65.59  | -65.18  | -68.18  | -65.62  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6185MHz

01/03/2023

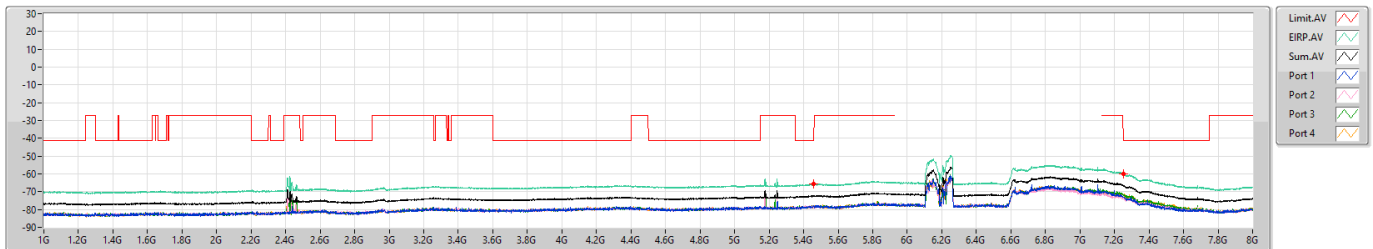


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.45638G | -65.70    | -41.20     | -24.50     | 6.49   | 0.00    | -72.19    | -77.82  | -78.51  | -78.04  | -78.51  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -59.97    | -41.20     | -18.77     | 6.49   | 0.00    | -66.46    | -72.90  | -74.03  | -71.58  | -71.84  |
| 1G          | 8G         | 1M      | AV   | 7.25365G | -59.97    | -41.20     | -18.77     | 6.49   | 0.00    | -66.46    | -72.90  | -74.03  | -71.58  | -71.84  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MC50)\_4TX

CSE Other [PK]

6345MHz

01/03/2023

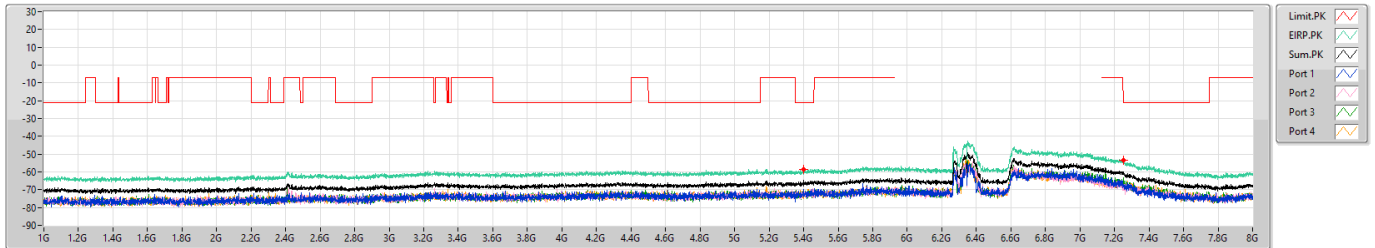


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.3995G  | -58.41    | -21.20     | -37.21     | 6.49   | 0.00     | -64.90    | -69.81  | -70.98  | -72.23  | -70.98  |
| 1G          | 8G         | 1M      | PK   | 7.251G   | -53.58    | -21.20     | -32.38     | 6.49   | 0.00     | -60.07    | -67.27  | -70.40  | -63.25  | -66.34  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MC50)\_4TX

CSE Other [AV]

6345MHz

01/03/2023

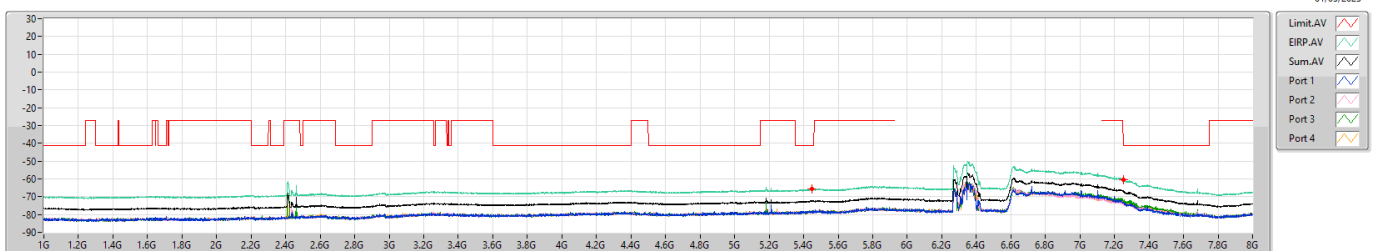


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.44938G | -65.54    | -41.20     | -24.34     | 6.49   | 0.00     | -72.03    | -78.29  | -78.05  | -77.61  | -78.29  |
| 1G          | 8G         | 1M      | AV   | 7.25188G | -60.26    | -41.20     | -19.06     | 6.49   | 0.00     | -66.75    | -73.21  | -73.95  | -71.97  | -72.25  |

6.425-6.525GHz\_802.11ax\_HEW160\_Nss1,(MC50)\_4TX

CSE Other [PK]

6505MHz

01/03/2023

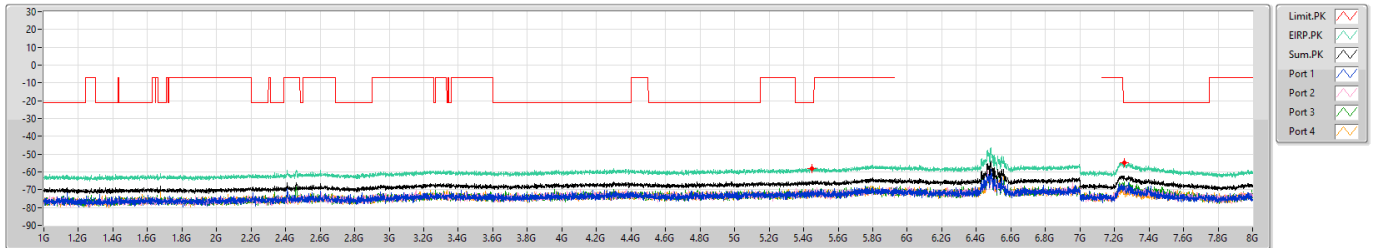


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.44938G | -57.98    | -21.20     | -36.78     | 7.31   | 0.00     | -65.29    | -72.07  | -72.54  | -70.70  | -70.32  |
| 1G          | 8G         | 1M      | PK   | 7.258G   | -54.87    | -21.20     | -33.67     | 7.31   | 0.00     | -62.18    | -67.35  | -70.64  | -65.82  | -71.36  |

6.425-6.525GHz\_802.11ax\_HEW160\_Nss1,(MC50)\_4TX

CSE Other [AV]

6505MHz

01/03/2023

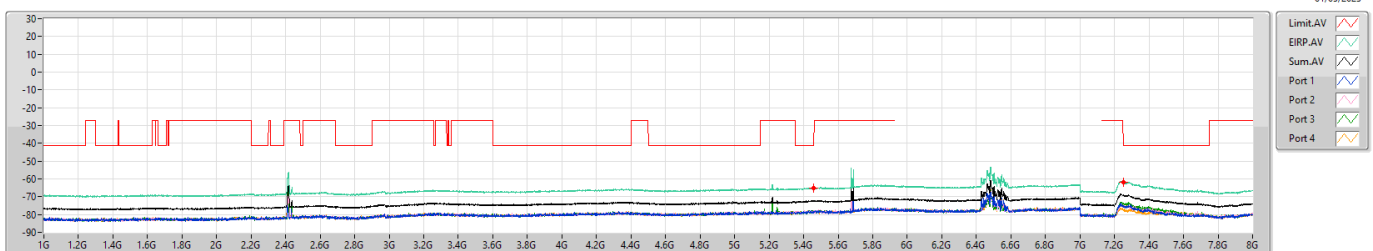


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.45988G | -64.94    | -41.20     | -23.74     | 7.31   | 0.00     | -72.25    | -78.51  | -78.04  | -78.04  | -78.51  |
| 1G          | 8G         | 1M      | AV   | 7.251G   | -61.73    | -41.20     | -20.53     | 7.31   | 0.00     | -69.04    | -74.94  | -74.75  | -73.78  | -77.60  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MC50)\_4TX

CSE Other [PK]

6665MHz

02/03/2023

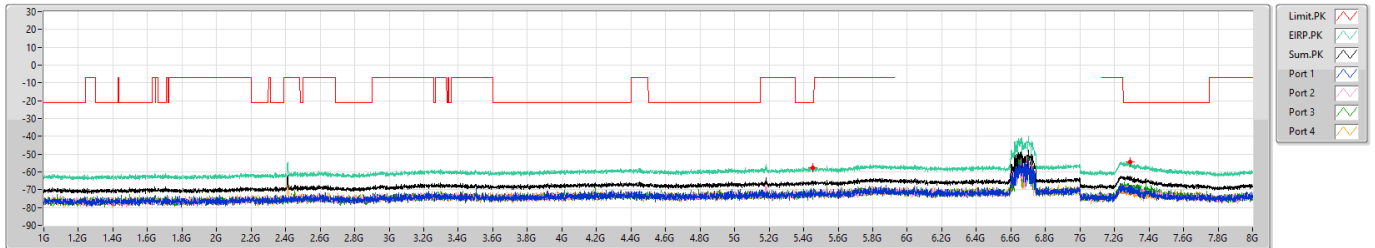


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.45288G | -57.47    | -21.20     | -36.27     | 7.65   | 0.00     | -65.12    | -71.84  | -70.40  | -71.84  | -70.69  |
| 1G          | 8G         | 1M      | PK   | 7.28863G | -54.60    | -21.20     | -33.40     | 7.65   | 0.00     | -62.25    | -67.48  | -67.48  | -68.02  | -70.94  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MC50)\_4TX

CSE Other [AV]

6665MHz

02/03/2023

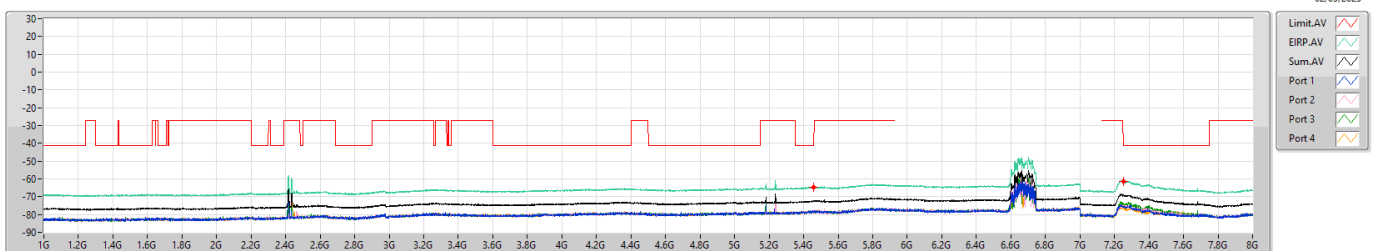

| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.4555G  | -64.54    | -41.20     | -23.34     | 7.65   | 0.00     | -72.19    | -78.28  | -78.51  | -78.04  | -78.04  |
| 1G          | 8G         | 1M      | AV   | 7.25188G | -61.48    | -41.20     | -20.28     | 7.65   | 0.00     | -69.13    | -76.06  | -75.13  | -73.78  | -76.06  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MC50)\_4TX

CSE Other [PK]

6825MHz

02/03/2023




| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.403G   | -57.77    | -21.20     | -36.57     | 7.65   | 0.00     | -65.42    | -73.39  | -70.49  | -71.77  | -70.67  |
| 1G          | 8G         | 1M      | PK   | 7.2545G  | -53.64    | -21.20     | -32.44     | 7.65   | 0.00     | -61.29    | -67.23  | -67.51  | -65.40  | -70.52  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MC50)\_4TX

CSE Other [AV]

6825MHz

02/03/2023

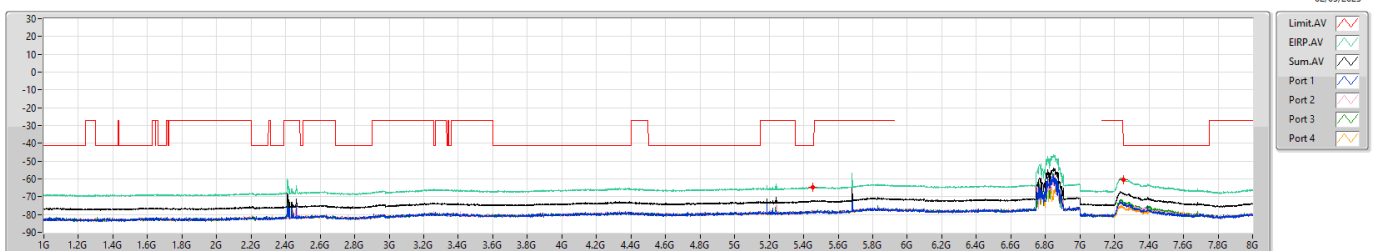


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.45375G | -64.54    | -41.20     | -23.34     | 7.65   | 0.00     | -72.19    | -78.52  | -78.28  | -78.52  | -77.60  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -60.46    | -41.20     | -19.26     | 7.65   | 0.00     | -68.11    | -74.29  | -73.69  | -72.98  | -76.16  |

6.875-7.125GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_4TX

CSE Other [PK]

6985MHz

02/03/2023

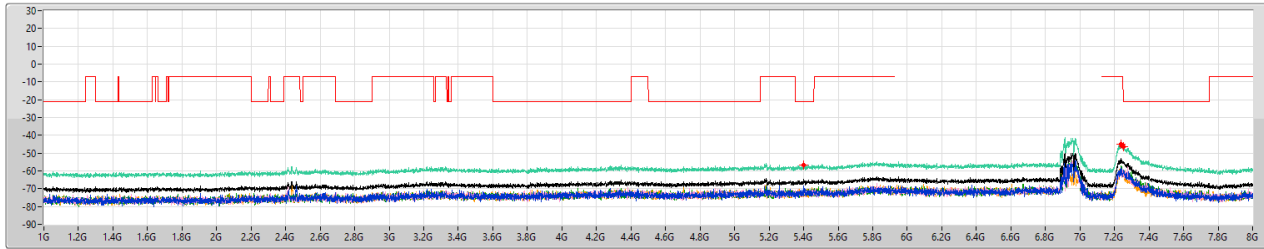


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | PK   | 5.40125G | -56.52    | -21.20     | -35.32     | 8.32   | 0.00     | -64.84    | -68.40  | -73.15  | -70.06  | -74.35  |
| 1G          | 8G         | 1M      | PK   | 7.23613G | -44.79    | -7.00      | -37.79     | 8.32   | 0.00     | -53.11    | -58.17  | -60.18  | -58.56  | -59.98  |
| 1G          | 8G         | 1M      | PK   | 7.25013G | -46.36    | -21.20     | -25.16     | 8.32   | 0.00     | -54.68    | -60.00  | -62.72  | -59.30  | -61.59  |

6.875-7.125GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_4TX

CSE Other [AV]

6985MHz

02/03/2023

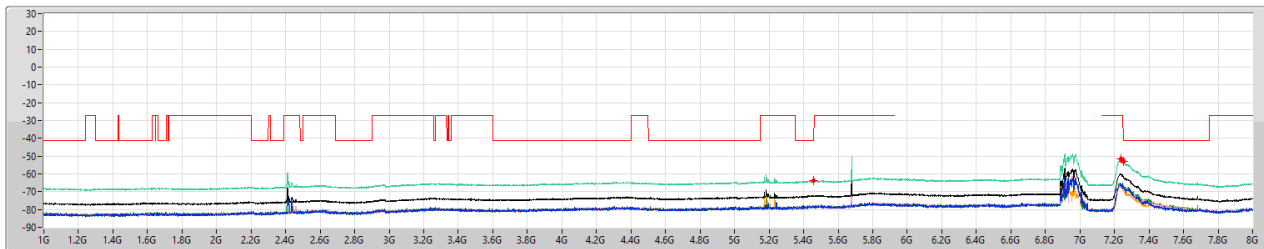

| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) | P2(dBm) | P3(dBm) | P4(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|---------|---------|---------|
| 1G          | 8G         | 1M      | AV   | 5.45725G | -63.93    | -41.20     | -22.73     | 8.32   | 0.00     | -72.25    | -78.27  | -78.04  | -78.76  | -78.04  |
| 1G          | 8G         | 1M      | AV   | 7.23786G | -51.72    | -27.00     | -24.72     | 8.32   | 0.00     | -60.04    | -65.59  | -66.09  | -65.47  | -67.35  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -53.18    | -41.20     | -11.98     | 8.32   | 0.00     | -61.50    | -68.10  | -67.71  | -66.37  | -68.14  |



**CSE (Band Reject Filter)\_Radio 3-1T1S**  
**For other test frequencies (Harmonic 1GHz ~ 8GHz)**

**Appendix E.3**

**Summary**

| Mode                           | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | EIRP<br>(dBm) | Psum<br>(dBm) | P1<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | DG<br>(dBi) |
|--------------------------------|--------|-----------------|----------------|------|---------------|---------------|-------------|----------------|----------------|-------------|
| 5.925-6.425GHz                 | -      | -               | -              | -    | -             | -             | -           | -              | -              | -           |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | Pass   | 1G              | 8G             | AV   | -58.80        | -65.60        | -65.60      | -41.20         | -17.60         | 6.80        |
| 6.425-6.525GHz                 | -      | -               | -              | -    | -             | -             | -           | -              | -              | -           |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | Pass   | 1G              | 8G             | AV   | -58.19        | -64.99        | -64.99      | -41.20         | -16.99         | 6.80        |
| 6.525-6.875GHz                 | -      | -               | -              | -    | -             | -             | -           | -              | -              | -           |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | Pass   | 1G              | 8G             | AV   | -57.16        | -63.96        | -63.96      | -41.20         | -15.96         | 6.80        |
| 6.875-7.125GHz                 | -      | -               | -              | -    | -             | -             | -           | -              | -              | -           |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | Pass   | 1G              | 8G             | AV   | -56.18        | -62.98        | -62.98      | -41.20         | -14.98         | 6.80        |

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



**CSE (Band Reject Filter)\_Radio 3-1T1S**  
**For other test frequencies (Harmonic 1GHz ~ 8GHz)**

**Appendix E.3**

**Result**

| Mode                            | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | Freq<br>(Hz) | DG<br>(dBi) | P1<br>(dBm) | Psum<br>(dBm) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------|--------|-----------------|----------------|------|--------------|-------------|-------------|---------------|---------------|----------------|----------------|
| 802.11ax HEW20_Nss1.(MCS0)_1TX  | -      | -               | -              | -    | -            | -           | -           | -             | -             | -              | -              |
| 5955MHz                         | Pass   | 1G              | 8G             | AV   | 4.927G       | 6.80        | -65.71      | -65.71        | -58.91        | -41.20         | -17.71         |
| 5955MHz                         | Pass   | 1G              | 8G             | AV   | 5.088G       | 6.80        | -65.73      | -65.73        | -58.93        | -41.20         | -17.73         |
| 5955MHz                         | Pass   | 1G              | 8G             | AV   | 7.2545G      | 6.80        | -67.26      | -67.26        | -60.46        | -41.20         | -19.26         |
| 5955MHz                         | Pass   | 1G              | 8G             | PK   | 5.38025G     | 6.80        | -56.52      | -56.52        | -49.72        | -21.20         | -28.52         |
| 5955MHz                         | Pass   | 1G              | 8G             | PK   | 7.38925G     | 6.80        | -59.13      | -59.13        | -52.33        | -21.20         | -31.13         |
| 6175MHz                         | Pass   | 1G              | 8G             | AV   | 5.1125G      | 6.80        | -65.60      | -65.60        | -58.80        | -41.20         | -17.60         |
| 6175MHz                         | Pass   | 1G              | 8G             | AV   | 7.3735G      | 6.80        | -67.51      | -67.51        | -60.71        | -41.20         | -19.51         |
| 6175MHz                         | Pass   | 1G              | 8G             | PK   | 5.41175G     | 6.80        | -57.24      | -57.24        | -50.44        | -21.20         | -29.24         |
| 6175MHz                         | Pass   | 1G              | 8G             | PK   | 7.52225G     | 6.80        | -59.61      | -59.61        | -52.81        | -21.20         | -31.61         |
| 6415MHz                         | Pass   | 1G              | 8G             | AV   | 5.12563G     | 6.80        | -65.93      | -65.93        | -59.13        | -41.20         | -17.93         |
| 6415MHz                         | Pass   | 1G              | 8G             | AV   | 7.27113G     | 6.80        | -67.45      | -67.45        | -60.65        | -41.20         | -19.45         |
| 6415MHz                         | Pass   | 1G              | 8G             | PK   | 5.04688G     | 6.80        | -57.16      | -57.16        | -50.36        | -21.20         | -29.16         |
| 6415MHz                         | Pass   | 1G              | 8G             | PK   | 7.28863G     | 6.80        | -58.60      | -58.60        | -51.80        | -21.20         | -30.60         |
| 6435MHz                         | Pass   | 1G              | 8G             | AV   | 5.43625G     | 6.80        | -65.45      | -65.45        | -58.65        | -41.20         | -17.45         |
| 6435MHz                         | Pass   | 1G              | 8G             | AV   | 7.25713G     | 6.80        | -67.48      | -67.48        | -60.68        | -41.20         | -19.48         |
| 6435MHz                         | Pass   | 1G              | 8G             | PK   | 5.06G        | 6.80        | -56.87      | -56.87        | -50.07        | -21.20         | -28.87         |
| 6435MHz                         | Pass   | 1G              | 8G             | PK   | 7.32188G     | 6.80        | -58.97      | -58.97        | -52.17        | -21.20         | -30.97         |
| 6475MHz                         | Pass   | 1G              | 8G             | AV   | 5.09763G     | 6.80        | -65.66      | -65.66        | -58.86        | -41.20         | -17.66         |
| 6475MHz                         | Pass   | 1G              | 8G             | AV   | 7.26413G     | 6.80        | -67.18      | -67.18        | -60.38        | -41.20         | -19.18         |
| 6475MHz                         | Pass   | 1G              | 8G             | PK   | 5.02588G     | 6.80        | -57.38      | -57.38        | -50.58        | -21.20         | -29.38         |
| 6475MHz                         | Pass   | 1G              | 8G             | PK   | 7.30613G     | 6.80        | -59.13      | -59.13        | -52.33        | -21.20         | -31.13         |
| 6515MHz                         | Pass   | 1G              | 8G             | AV   | 5.13963G     | 6.80        | -64.99      | -64.99        | -58.19        | -41.20         | -16.99         |
| 6515MHz                         | Pass   | 1G              | 8G             | AV   | 7.60188G     | 6.80        | -67.31      | -67.31        | -60.51        | -41.20         | -19.31         |
| 6515MHz                         | Pass   | 1G              | 8G             | PK   | 5.09063G     | 6.80        | -57.58      | -57.58        | -50.78        | -21.20         | -29.58         |
| 6515MHz                         | Pass   | 1G              | 8G             | PK   | 7.7305G      | 6.80        | -59.66      | -59.66        | -52.86        | -21.20         | -31.66         |
| 6535MHz                         | Pass   | 1G              | 8G             | AV   | 5.41788G     | 6.80        | -63.96      | -63.96        | -57.16        | -41.20         | -15.96         |
| 6535MHz                         | Pass   | 1G              | 8G             | AV   | 7.25363G     | 6.80        | -66.52      | -66.52        | -59.72        | -41.20         | -18.52         |
| 6535MHz                         | Pass   | 1G              | 8G             | PK   | 5.05738G     | 6.80        | -54.67      | -54.67        | -47.87        | -21.20         | -26.67         |
| 6535MHz                         | Pass   | 1G              | 8G             | PK   | 7.27288G     | 6.80        | -58.48      | -58.48        | -51.68        | -21.20         | -30.48         |
| 6695MHz                         | Pass   | 1G              | 8G             | AV   | 4.96025G     | 6.80        | -65.47      | -65.47        | -58.67        | -41.20         | -17.47         |
| 6695MHz                         | Pass   | 1G              | 8G             | AV   | 5.0985G      | 6.80        | -65.83      | -65.83        | -59.03        | -41.20         | -17.83         |
| 6695MHz                         | Pass   | 1G              | 8G             | AV   | 7.25975G     | 6.80        | -67.51      | -67.51        | -60.71        | -41.20         | -19.51         |
| 6695MHz                         | Pass   | 1G              | 8G             | PK   | 5.45988G     | 6.80        | -57.61      | -57.61        | -50.81        | -21.20         | -29.61         |
| 6695MHz                         | Pass   | 1G              | 8G             | PK   | 7.3035G      | 6.80        | -58.19      | -58.19        | -51.39        | -21.20         | -30.19         |
| 6855MHz                         | Pass   | 1G              | 8G             | AV   | 4.92613G     | 6.80        | -65.71      | -65.71        | -58.91        | -41.20         | -17.71         |
| 6855MHz                         | Pass   | 1G              | 8G             | AV   | 5.44413G     | 6.80        | -65.75      | -65.75        | -58.95        | -41.20         | -17.75         |
| 6855MHz                         | Pass   | 1G              | 8G             | AV   | 7.27638G     | 6.80        | -67.32      | -67.32        | -60.52        | -41.20         | -19.32         |
| 6855MHz                         | Pass   | 1G              | 8G             | PK   | 5.42313G     | 6.80        | -57.05      | -57.05        | -50.25        | -21.20         | -29.05         |
| 6855MHz                         | Pass   | 1G              | 8G             | PK   | 7.37088G     | 6.80        | -59.28      | -59.28        | -52.48        | -21.20         | -31.28         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 1G              | 8G             | AV   | 5.13525G     | 6.80        | -65.53      | -65.53        | -58.73        | -41.20         | -17.53         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 1G              | 8G             | AV   | 7.26063G     | 6.80        | -67.52      | -67.52        | -60.72        | -41.20         | -19.52         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 1G              | 8G             | PK   | 5.1475G      | 6.80        | -56.68      | -56.68        | -49.88        | -21.20         | -28.68         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 1G              | 8G             | PK   | 7.4295G      | 6.80        | -59.20      | -59.20        | -52.40        | -21.20         | -31.20         |
| 6875MHz Straddle 6.875-7.125GHz |        |                 |                |      |              |             |             |               |               |                |                |
| 6895MHz                         | Pass   | 1G              | 8G             | AV   | 4.91563G     | 6.80        | -65.54      | -65.54        | -58.74        | -41.20         | -17.54         |
| 6895MHz                         | Pass   | 1G              | 8G             | AV   | 5.43275G     | 6.80        | -65.87      | -65.87        | -59.07        | -41.20         | -17.87         |
| 6895MHz                         | Pass   | 1G              | 8G             | AV   | 7.23963G     | 6.80        | -67.74      | -67.74        | -60.94        | -27.00         | -33.94         |
| 6895MHz                         | Pass   | 1G              | 8G             | AV   | 7.27638G     | 6.80        | -67.32      | -67.32        | -60.52        | -41.20         | -19.32         |
| 6895MHz                         | Pass   | 1G              | 8G             | PK   | 5.13438G     | 6.80        | -55.85      | -55.85        | -49.05        | -21.20         | -27.85         |
| 6895MHz                         | Pass   | 1G              | 8G             | PK   | 7.2405G      | 6.80        | -60.04      | -60.04        | -53.24        | -7.00          | -46.24         |
| 6895MHz                         | Pass   | 1G              | 8G             | PK   | 7.73663G     | 6.80        | -58.33      | -58.33        | -51.53        | -21.20         | -30.33         |
| 6995MHz                         | Pass   | 1G              | 8G             | AV   | 4.66363G     | 6.80        | -64.17      | -64.17        | -57.37        | -41.20         | -16.17         |
| 6995MHz                         | Pass   | 1G              | 8G             | AV   | 5.074G       | 6.80        | -65.48      | -65.48        | -58.68        | -41.20         | -17.48         |
| 6995MHz                         | Pass   | 1G              | 8G             | AV   | 7.244G       | 6.80        | -67.29      | -67.29        | -60.49        | -27.00         | -33.49         |
| 6995MHz                         | Pass   | 1G              | 8G             | AV   | 7.25013G     | 6.80        | -67.40      | -67.40        | -60.60        | -41.20         | -19.40         |
| 6995MHz                         | Pass   | 1G              | 8G             | PK   | 5.45813G     | 6.80        | -56.48      | -56.48        | -49.68        | -21.20         | -28.48         |
| 6995MHz                         | Pass   | 1G              | 8G             | PK   | 7.22913G     | 6.80        | -58.45      | -58.45        | -51.65        | -7.00          | -44.65         |
| 6995MHz                         | Pass   | 1G              | 8G             | PK   | 7.2685G      | 6.80        | -59.50      | -59.50        | -52.70        | -21.20         | -31.50         |
| 7095MHz                         | Pass   | 1G              | 8G             | AV   | 4.73013G     | 6.80        | -62.98      | -62.98        | -56.18        | -41.20         | -14.98         |
| 7095MHz                         | Pass   | 1G              | 8G             | AV   | 5.14225G     | 6.80        | -65.51      | -65.51        | -58.71        | -41.20         | -17.51         |
| 7095MHz                         | Pass   | 1G              | 8G             | AV   | 7.24225G     | 6.80        | -67.31      | -67.31        | -60.51        | -27.00         | -33.51         |
| 7095MHz                         | Pass   | 1G              | 8G             | AV   | 7.28163G     | 6.80        | -67.20      | -67.20        | -60.40        | -41.20         | -19.20         |
| 7095MHz                         | Pass   | 1G              | 8G             | PK   | 5.38463G     | 6.80        | -57.29      | -57.29        | -50.49        | -21.20         | -29.29         |
| 7095MHz                         | Pass   | 1G              | 8G             | PK   | 7.24663G     | 6.80        | -59.72      | -59.72        | -52.92        | -7.00          | -45.92         |
| 7095MHz                         | Pass   | 1G              | 8G             | PK   | 7.35513G     | 6.80        | -59.50      | -59.50        | -52.70        | -21.20         | -31.50         |


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

5955MHz

10/04/2023

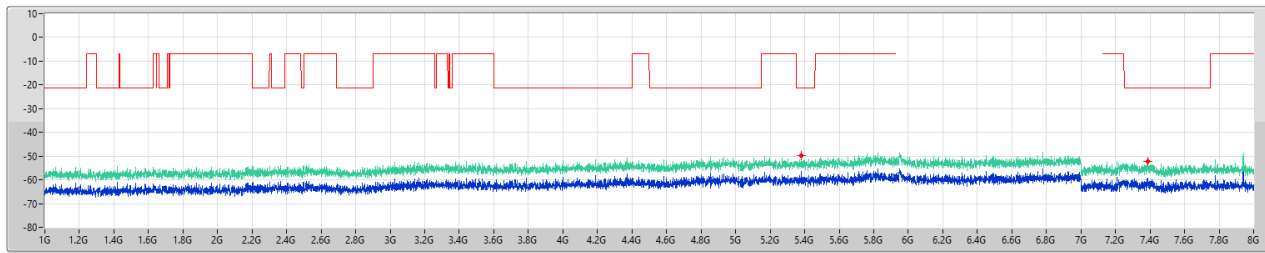


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.38025G | -49.72    | -21.20     | -28.52     | 6.80   | 0.00    | -56.52    | -56.52  |
| 1G          | 8G         | 1M      | PK   | 7.38925G | -52.33    | -21.20     | -31.13     | 6.80   | 0.00    | -59.13    | -59.13  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

5955MHz

10/04/2023

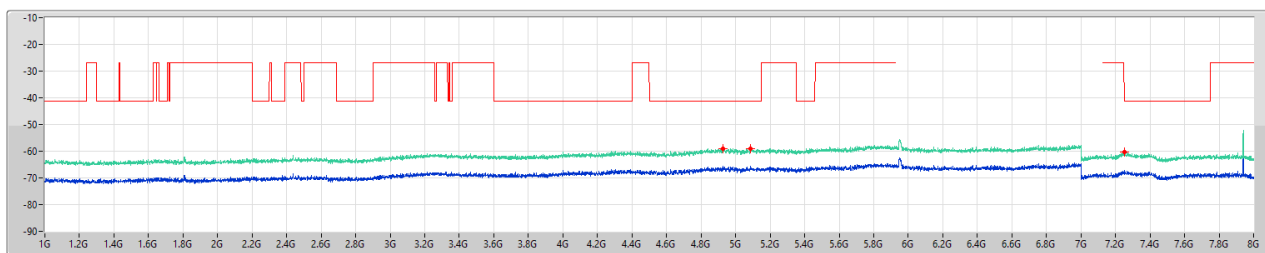


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 4.927G   | -58.91    | -41.20     | -17.71     | 6.80   | 0.00    | -65.71    | -65.71  |
| 1G          | 8G         | 1M      | AV   | 5.088G   | -58.93    | -41.20     | -17.73     | 6.80   | 0.00    | -65.73    | -65.73  |
| 1G          | 8G         | 1M      | AV   | 7.2545G  | -60.46    | -41.20     | -19.26     | 6.80   | 0.00    | -67.26    | -67.26  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6175MHz

10/04/2023

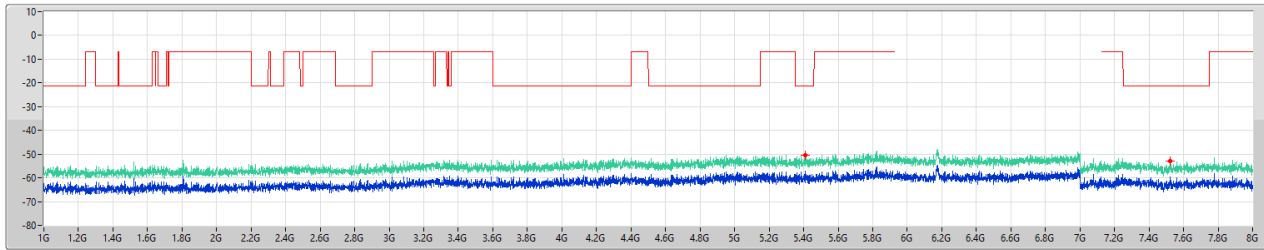


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.41175G | -50.44    | -21.20     | -29.24     | 6.80   | 0.00    | -57.24    | -57.24  |
| 1G          | 8G         | 1M      | PK   | 7.52225G | -52.81    | -21.20     | -31.61     | 6.80   | 0.00    | -59.61    | -59.61  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6175MHz

10/04/2023

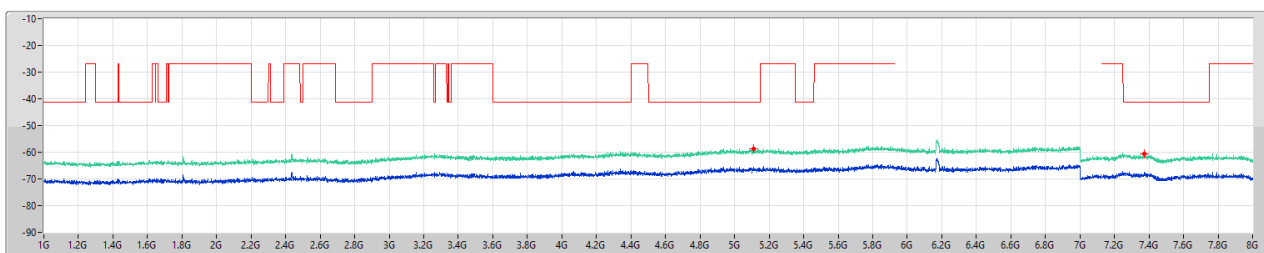


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 5.1125G  | -58.80    | -41.20     | -17.60     | 6.80   | 0.00    | -65.60    | -65.60  |
| 1G          | 8G         | 1M      | AV   | 7.3735G  | -60.71    | -41.20     | -19.51     | 6.80   | 0.00    | -67.51    | -67.51  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6415MHz

10/04/2023

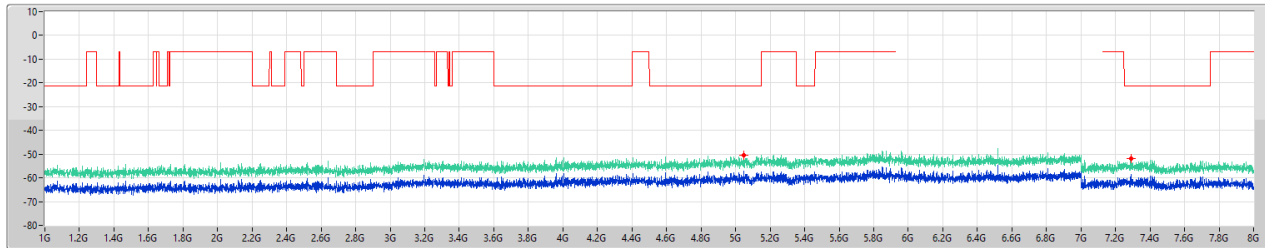


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.04688G | -50.36    | -21.20     | -29.16     | 6.80   | 0.00    | -57.16    | -57.16  |
| 1G          | 8G         | 1M      | PK   | 7.28863G | -51.80    | -21.20     | -30.60     | 6.80   | 0.00    | -58.60    | -58.60  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6415MHz

10/04/2023

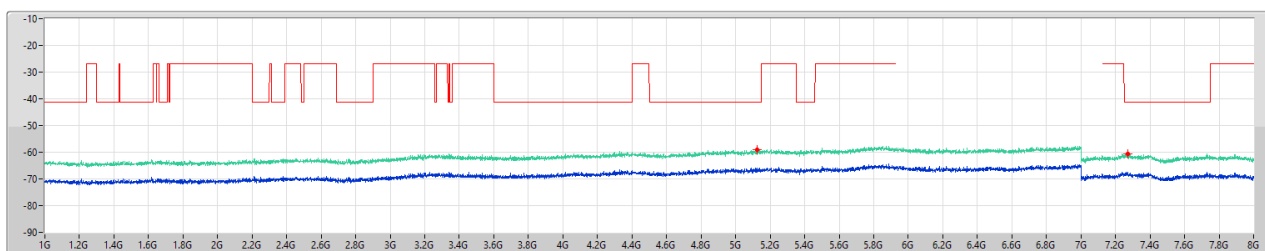


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 5.12563G | -59.13    | -41.20     | -17.93     | 6.80   | 0.00    | -65.93    | -65.93  |
| 1G          | 8G         | 1M      | AV   | 7.27113G | -60.65    | -41.20     | -19.45     | 6.80   | 0.00    | -67.45    | -67.45  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6435MHz

10/04/2023

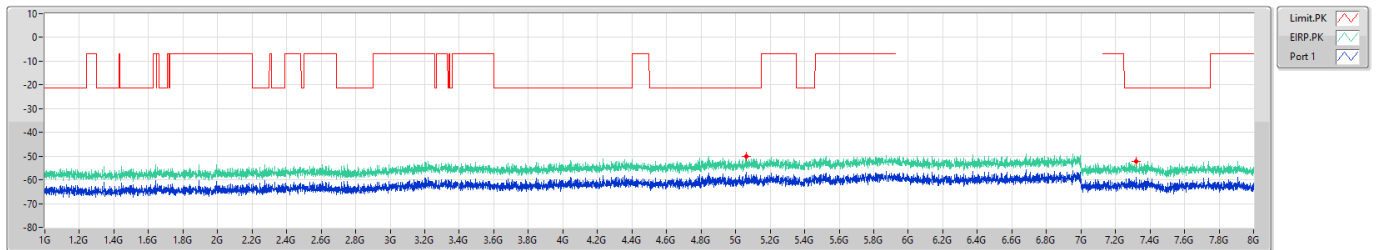


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.06G    | -50.07    | -21.20     | -28.87     | 6.80   | 0.00    | -56.87    | -56.87  |
| 1G          | 8G         | 1M      | PK   | 7.32188G | -52.17    | -21.20     | -30.97     | 6.80   | 0.00    | -58.97    | -58.97  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6435MHz

10/04/2023

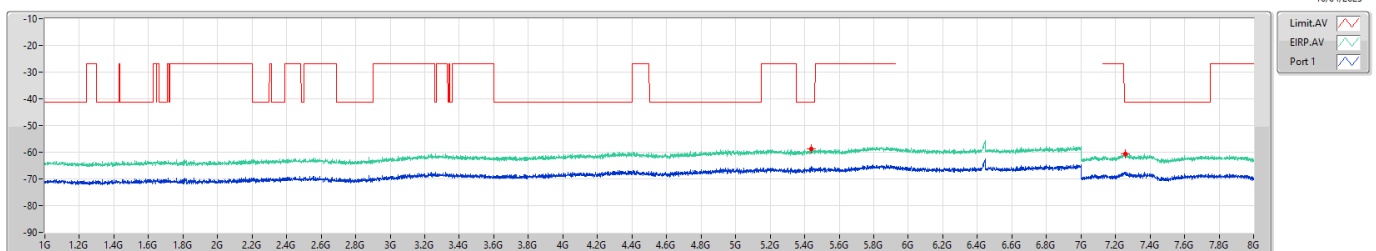


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 5.43625G | -58.65    | -41.20     | -17.45     | 6.80   | 0.00    | -65.45    | -65.45  |
| 1G          | 8G         | 1M      | AV   | 7.25713G | -60.68    | -41.20     | -19.48     | 6.80   | 0.00    | -67.48    | -67.48  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6475MHz

10/04/2023

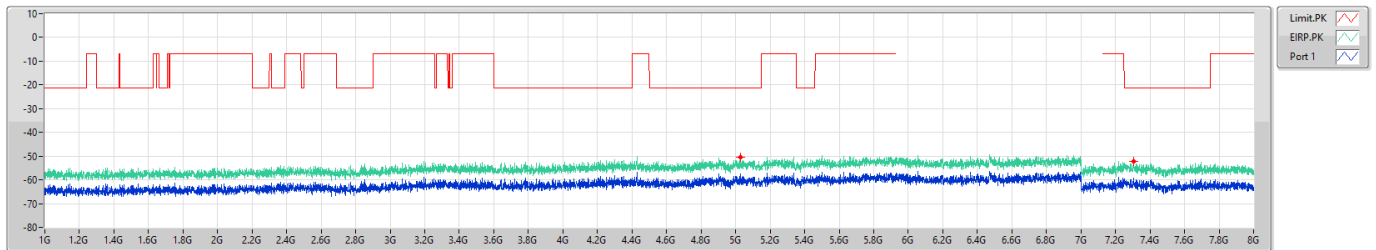


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.02588G | -50.58    | -21.20     | -29.38     | 6.80   | 0.00    | -57.38    | -57.38  |
| 1G          | 8G         | 1M      | PK   | 7.30613G | -52.33    | -21.20     | -31.13     | 6.80   | 0.00    | -59.13    | -59.13  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6475MHz

10/04/2023

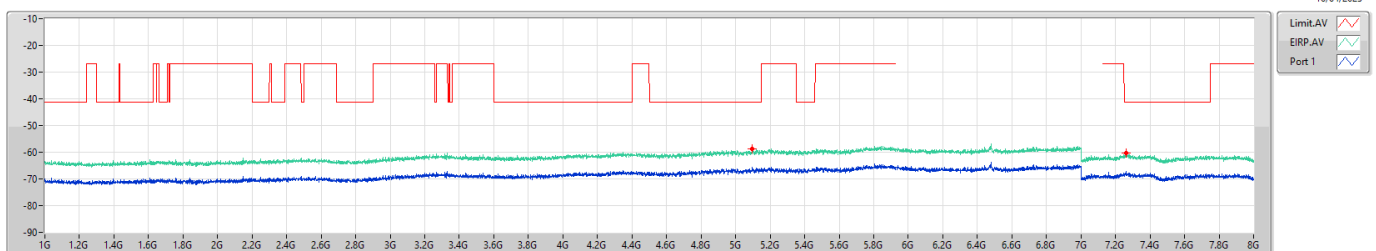


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 5.09763G | -58.86    | -41.20     | -17.66     | 6.80   | 0.00    | -65.66    | -65.66  |
| 1G          | 8G         | 1M      | AV   | 7.26413G | -60.38    | -41.20     | -19.18     | 6.80   | 0.00    | -67.18    | -67.18  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6515MHz

10/04/2023

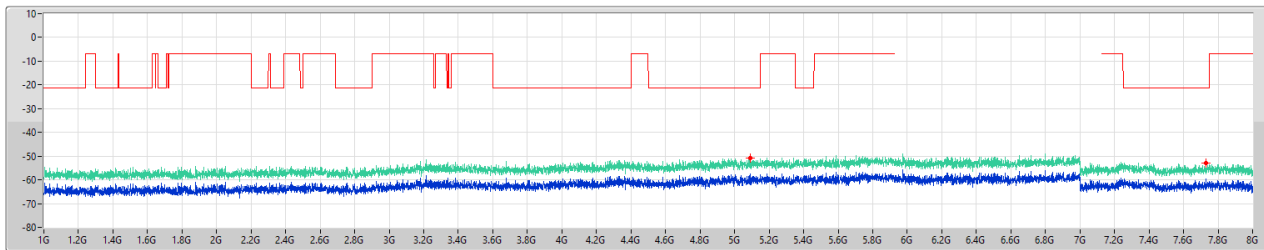

Limit:PK  
 EIRP:PK  
 Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.09063G | -50.78    | -21.20     | -29.58     | 6.80   | 0.00    | -57.58    | -57.58  |
| 1G          | 8G         | 1M      | PK   | 7.7305G  | -52.86    | -21.20     | -31.66     | 6.80   | 0.00    | -59.66    | -59.66  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6515MHz

10/04/2023

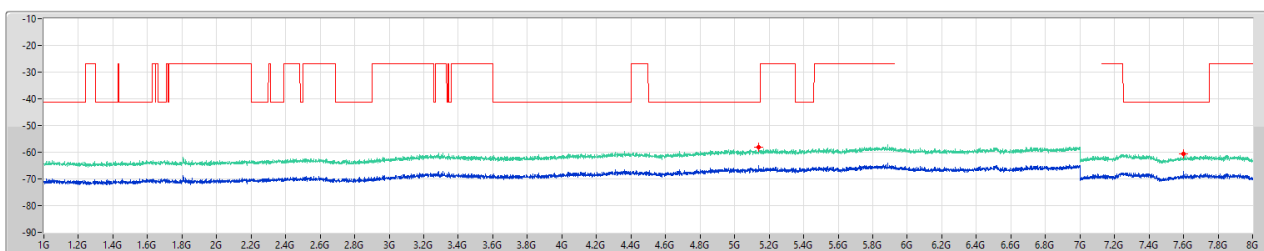

Limit:AV  
 EIRP:AV  
 Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 5.13963G | -58.19    | -41.20     | -16.99     | 6.80   | 0.00    | -64.99    | -64.99  |
| 1G          | 8G         | 1M      | AV   | 7.60188G | -60.51    | -41.20     | -19.31     | 6.80   | 0.00    | -67.31    | -67.31  |

6.525-6.875GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6535MHz

10/04/2023

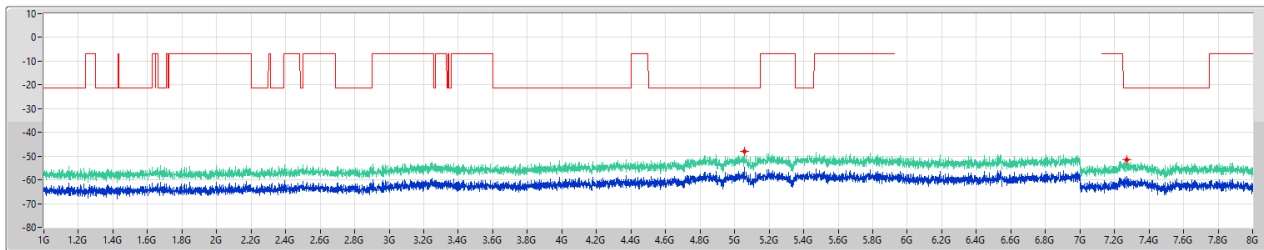


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.05738G | -47.87    | -21.20     | -26.67     | 6.80   | 0.00    | -54.67    | -54.67  |
| 1G          | 8G         | 1M      | PK   | 7.27288G | -51.68    | -21.20     | -30.48     | 6.80   | 0.00    | -58.48    | -58.48  |

6.525-6.875GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6535MHz

10/04/2023

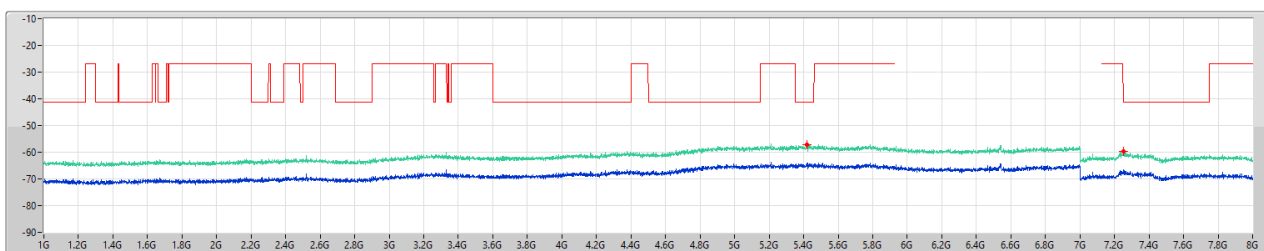


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 5.41788G | -57.16    | -41.20     | -15.96     | 6.80   | 0.00    | -63.96    | -63.96  |
| 1G          | 8G         | 1M      | AV   | 7.25363G | -59.72    | -41.20     | -18.52     | 6.80   | 0.00    | -66.52    | -66.52  |

6.525-6.875GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6695MHz

10/04/2023

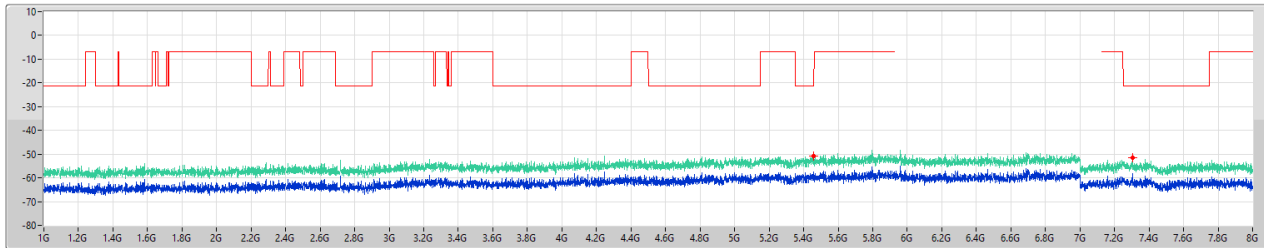


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.45988G | -50.81    | -21.20     | -29.61     | 6.80   | 0.00    | -57.61    | -57.61  |
| 1G          | 8G         | 1M      | PK   | 7.3035G  | -51.39    | -21.20     | -30.19     | 6.80   | 0.00    | -58.19    | -58.19  |

6.525-6.875GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6695MHz

10/04/2023

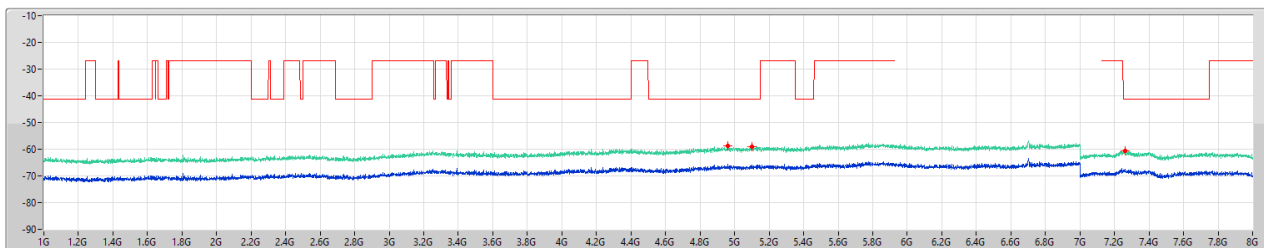


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 4.96025G | -58.67    | -41.20     | -17.47     | 6.80   | 0.00    | -65.47    | -65.47  |
| 1G          | 8G         | 1M      | AV   | 5.0985G  | -59.03    | -41.20     | -17.83     | 6.80   | 0.00    | -65.83    | -65.83  |
| 1G          | 8G         | 1M      | AV   | 7.25975G | -60.71    | -41.20     | -19.51     | 6.80   | 0.00    | -67.51    | -67.51  |

6.525-6.875GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6855MHz

10/04/2023

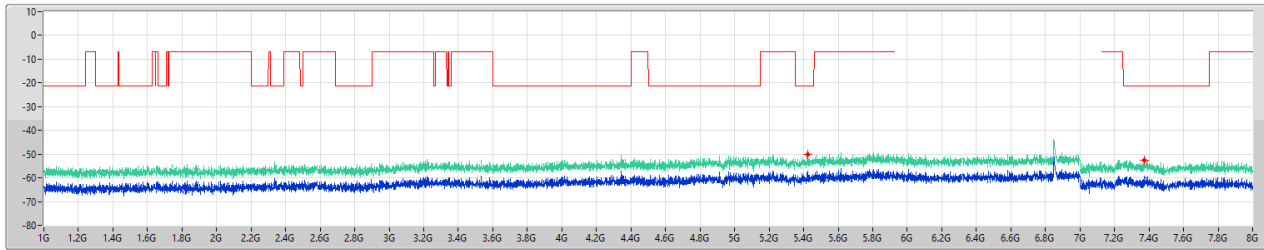


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.42313G | -50.25    | -21.20     | -29.05     | 6.80   | 0.00     | -57.05    | -57.05  |
| 1G          | 8G         | 1M      | PK   | 7.37088G | -52.48    | -21.20     | -31.28     | 6.80   | 0.00     | -59.28    | -59.28  |

6.525-6.875GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6855MHz

10/04/2023

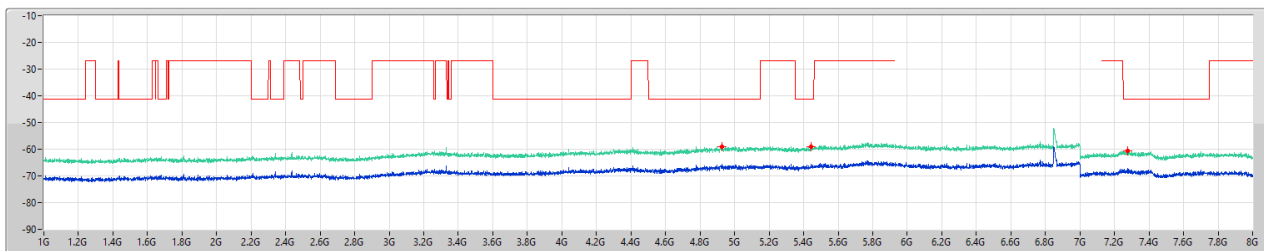


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | RefI(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|----------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 4.92613G | -58.91    | -41.20     | -17.71     | 6.80   | 0.00     | -65.71    | -65.71  |
| 1G          | 8G         | 1M      | AV   | 5.44413G | -58.95    | -41.20     | -17.75     | 6.80   | 0.00     | -65.75    | -65.75  |
| 1G          | 8G         | 1M      | AV   | 7.27638G | -60.52    | -41.20     | -19.32     | 6.80   | 0.00     | -67.32    | -67.32  |

6.525-6.875GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6875MHz Straddle 6.525-6.875GHz

10/04/2023

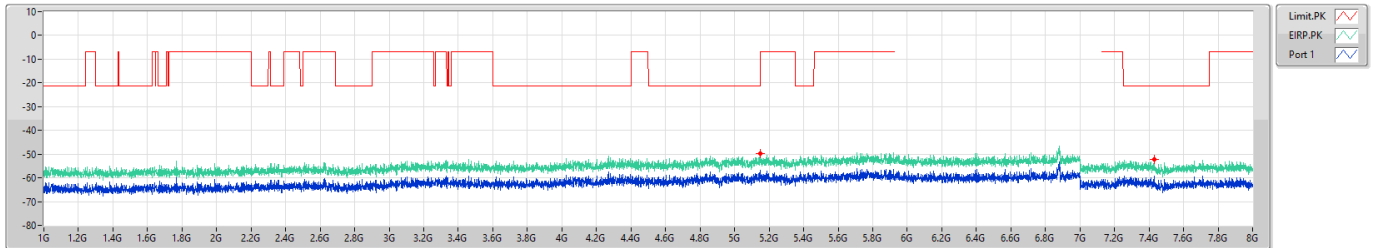


6.525-6.875GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6875MHz Straddle 6.525-6.875GHz

10/04/2023

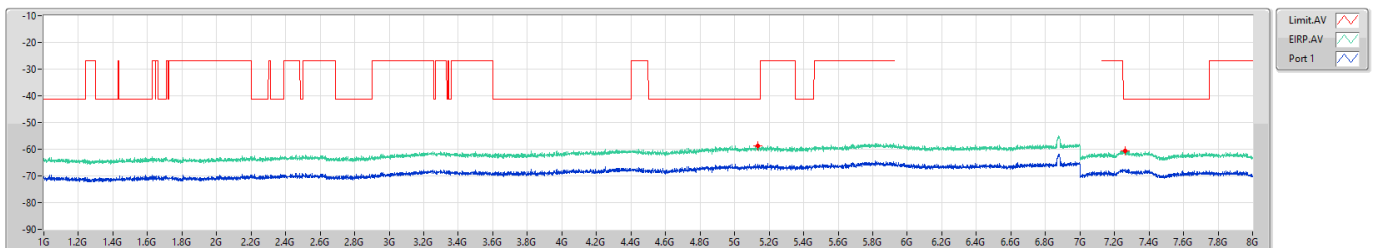


6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6895MHz

10/04/2023

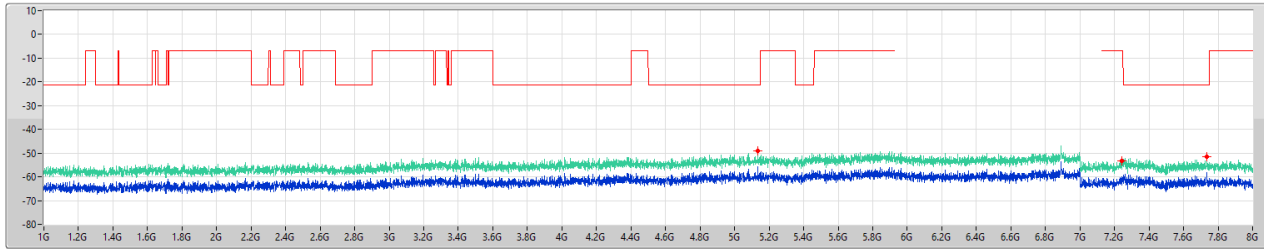

Limit.PK  
EIRP.PK  
Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.13438G | -49.05    | -21.20     | -27.85     | 6.80   | 0.00    | -55.85    | -55.85  |
| 1G          | 8G         | 1M      | PK   | 7.2405G  | -53.24    | -7.00      | -46.24     | 6.80   | 0.00    | -60.04    | -60.04  |
| 1G          | 8G         | 1M      | PK   | 7.73663G | -51.53    | -21.20     | -30.33     | 6.80   | 0.00    | -58.33    | -58.33  |

6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6895MHz

10/04/2023

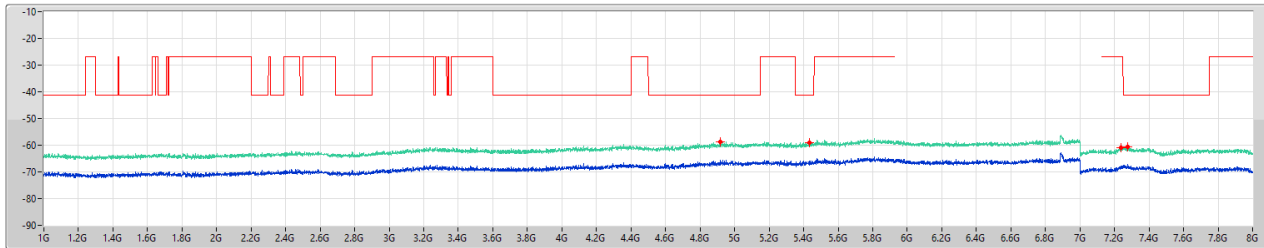

Limit.AV  
EIRP.AV  
Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 4.91563G | -58.74    | -41.20     | -17.54     | 6.80   | 0.00    | -65.54    | -65.54  |
| 1G          | 8G         | 1M      | AV   | 5.43275G | -59.07    | -41.20     | -17.87     | 6.80   | 0.00    | -65.87    | -65.87  |
| 1G          | 8G         | 1M      | AV   | 7.23963G | -60.94    | -27.00     | -33.94     | 6.80   | 0.00    | -67.74    | -67.74  |
| 1G          | 8G         | 1M      | AV   | 7.27638G | -60.52    | -41.20     | -19.32     | 6.80   | 0.00    | -67.32    | -67.32  |

6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

6995MHz

10/04/2023

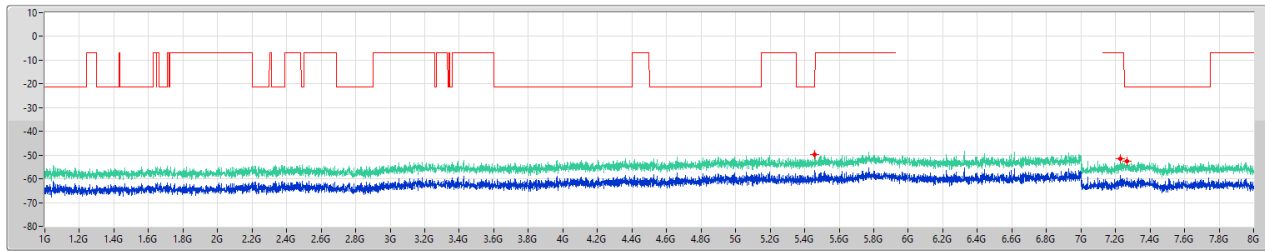


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.45813G | -49.68    | -21.20     | -28.48     | 6.80   | 0.00    | -56.48    | -56.48  |
| 1G          | 8G         | 1M      | PK   | 7.22913G | -51.65    | -7.00      | -44.65     | 6.80   | 0.00    | -58.45    | -58.45  |
| 1G          | 8G         | 1M      | PK   | 7.2685G  | -52.70    | -21.20     | -31.50     | 6.80   | 0.00    | -59.50    | -59.50  |

6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

6995MHz

10/04/2023

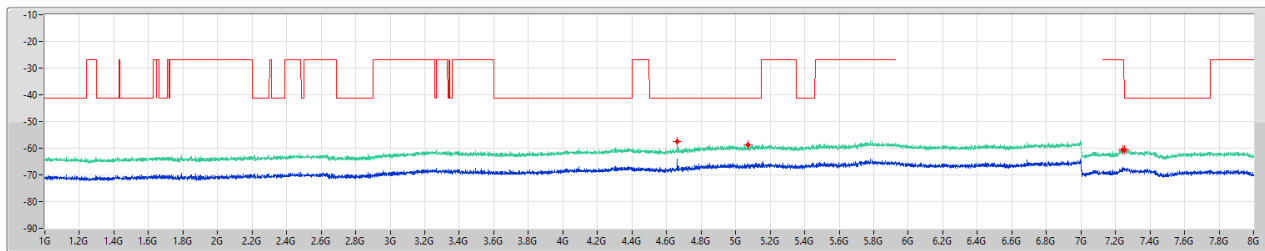


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 4.66363G | -57.37    | -41.20     | -16.17     | 6.80   | 0.00    | -64.17    | -64.17  |
| 1G          | 8G         | 1M      | AV   | 5.074G   | -58.68    | -41.20     | -17.48     | 6.80   | 0.00    | -65.48    | -65.48  |
| 1G          | 8G         | 1M      | AV   | 7.244G   | -60.49    | -27.00     | -33.49     | 6.80   | 0.00    | -67.29    | -67.29  |
| 1G          | 8G         | 1M      | AV   | 7.25013G | -60.60    | -41.20     | -19.40     | 6.80   | 0.00    | -67.40    | -67.40  |

6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [PK]

7095MHz

10/04/2023

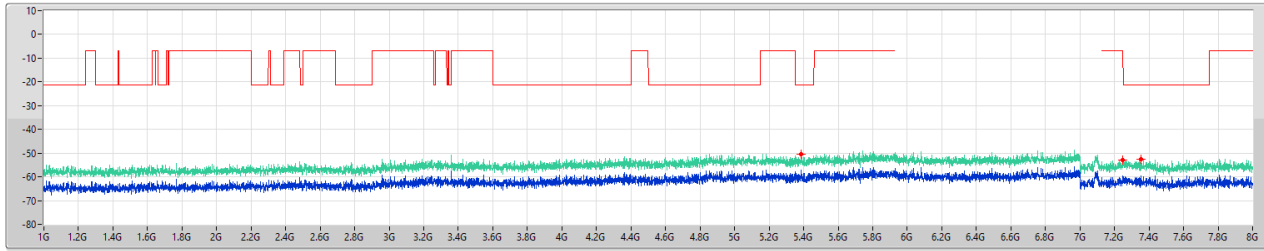

Limit:PK  
EIRP:PK  
Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | PK   | 5.38463G | -50.49    | -21.20     | -29.29     | 6.80   | 0.00    | -57.29    | -57.29  |
| 1G          | 8G         | 1M      | PK   | 7.24663G | -52.92    | -7.00      | -45.92     | 6.80   | 0.00    | -59.72    | -59.72  |
| 1G          | 8G         | 1M      | PK   | 7.35513G | -52.70    | -21.20     | -31.50     | 6.80   | 0.00    | -59.50    | -59.50  |

6.875-7.125GHz\_802.11ax HEW20\_Nss1,(MCS0)\_1TX

CSE Other [AV]

7095MHz

10/04/2023

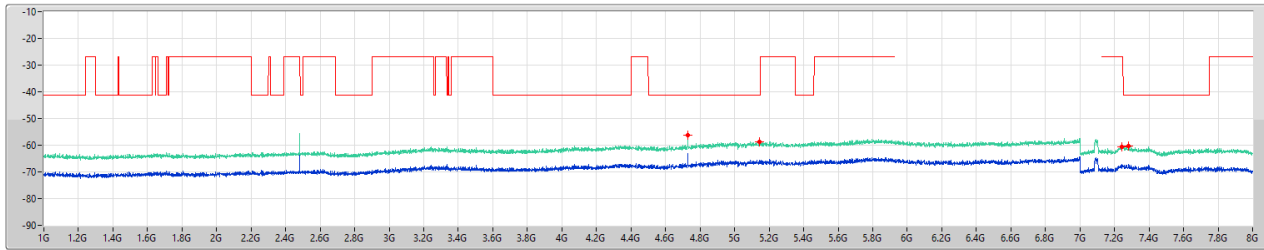

Limit:AV  
EIRP:AV  
Port 1

| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 1G          | 8G         | 1M      | AV   | 4.73013G | -56.18    | -41.20     | -14.98     | 6.80   | 0.00    | -62.98    | -62.98  |
| 1G          | 8G         | 1M      | AV   | 5.14225G | -58.71    | -41.20     | -17.51     | 6.80   | 0.00    | -65.51    | -65.51  |
| 1G          | 8G         | 1M      | AV   | 7.24225G | -60.51    | -27.00     | -33.51     | 6.80   | 0.00    | -67.31    | -67.31  |
| 1G          | 8G         | 1M      | AV   | 7.28163G | -60.40    | -41.20     | -19.20     | 6.80   | 0.00    | -67.20    | -67.20  |



**CSE (High Pass Filter)\_Radio 2-1T1S, 2T1S, 4T1S**  
**For other test frequencies (Harmonic 8GHz ~ 40GHz)**

**Appendix E.4**

**Summary**

| Mode                            | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | EIRP<br>(dBm) | Psum<br>(dBm) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) | P4<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | DG<br>(dBi) |
|---------------------------------|--------|-----------------|----------------|------|---------------|---------------|-------------|-------------|-------------|-------------|----------------|----------------|-------------|
| 5.925-6.425GHz                  | -      | -               | -              | -    | -             | -             | -           | -           | -           | -           | -              | -              | -           |
| 802.11ax HEW20_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -50.72        | -56.72        | -56.72      |             |             |             | -41.2          | -9.52          | 6.00        |
| 802.11ax HEW20_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -47.65        | -54.14        | -56.88      | -57.44      |             |             | -41.2          | -6.45          | 6.49        |
| 802.11ax HEW20_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -45.02        | -51.51        | -58.41      | -58.03      | -57.79      | -56.24      | -41.2          | -3.82          | 6.49        |
| 802.11ax HEW40_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -50.54        | -56.54        | -56.54      |             |             |             | -41.2          | -9.34          | 6.00        |
| 802.11ax HEW40_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -47.83        | -54.32        | -57.68      | -57         |             |             | -41.2          | -6.63          | 6.49        |
| 802.11ax HEW40_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -44.94        | -51.43        | -58.44      | -56.17      | -57.82      | -57.7       | -41.2          | -3.74          | 6.49        |
| 802.11ax HEW80_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -50.84        | -56.84        | -56.84      |             |             |             | -41.2          | -9.64          | 6.00        |
| 802.11ax HEW80_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -47.55        | -54.04        | -57.52      | -56.63      |             |             | -41.2          | -6.35          | 6.49        |
| 802.11ax HEW80_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -44.90        | -51.39        | -57.82      | -57.35      | -58.19      | -56.48      | -41.2          | -3.70          | 6.49        |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | Pass   | 8G              | 40G            | AV   | -50.35        | -56.35        | -56.35      |             |             |             | -41.2          | -9.15          | 6.00        |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | Pass   | 8G              | 40G            | AV   | -47.47        | -53.96        | -57.03      | -56.92      |             |             | -41.2          | -6.27          | 6.49        |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | Pass   | 8G              | 40G            | AV   | -44.96        | -51.45        | -58.28      | -57.91      | -55.75      | -58.54      | -41.2          | -3.76          | 6.49        |
| 6.425-6.525GHz                  | -      | -               | -              | -    | -             | -             | -           | -           | -           | -           | -              | -              | -           |
| 802.11ax HEW20_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -51.89        | -56.76        | -56.76      |             |             |             | -41.2          | -10.69         | 4.87        |
| 802.11ax HEW20_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -48.35        | -54.25        | -57.73      | -56.84      |             |             | -41.2          | -7.15          | 5.90        |
| 802.11ax HEW20_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -44.12        | -51.43        | -57.77      | -56.85      | -58.27      | -57.07      | -41.2          | -2.92          | 7.31        |
| 802.11ax HEW40_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -51.16        | -56.03        | -56.03      |             |             |             | -41.2          | -9.96          | 4.87        |
| 802.11ax HEW40_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -48.34        | -54.24        | -57.31      | -57.19      |             |             | -41.2          | -7.14          | 5.90        |
| 802.11ax HEW40_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -44.19        | -51.5         | -57.89      | -57.42      | -56.75      | -58.14      | -41.2          | -2.99          | 7.31        |
| 802.11ax HEW80_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -52.06        | -56.93        | -56.93      |             |             |             | -41.2          | -10.86         | 4.87        |
| 802.11ax HEW80_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -48.48        | -54.38        | -56.85      | -58.01      |             |             | -41.2          | -7.28          | 5.90        |
| 802.11ax HEW80_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -44.26        | -51.57        | -58.26      | -57.65      | -56.53      | -58.14      | -41.2          | -3.06          | 7.31        |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | Pass   | 8G              | 40G            | AV   | -52.27        | -57.14        | -57.14      |             |             |             | -41.2          | -11.07         | 4.87        |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | Pass   | 8G              | 40G            | AV   | -47.98        | -53.88        | -56.34      | -57.53      |             |             | -41.2          | -6.78          | 5.90        |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | Pass   | 8G              | 40G            | AV   | -44.39        | -51.7         | -57.67      | -56.99      | -58.04      | -58.29      | -41.2          | -3.19          | 7.31        |
| 6.525-6.875GHz                  | -      | -               | -              | -    | -             | -             | -           | -           | -           | -           | -              | -              | -           |
| 802.11ax HEW20_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -48.80        | -56.45        | -56.45      |             |             |             | -41.2          | -7.60          | 7.65        |
| 802.11ax HEW20_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -46.44        | -54.09        | -57.45      | -56.78      |             |             | -41.2          | -5.24          | 7.65        |
| 802.11ax HEW20_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -43.83        | -51.48        | -58.03      | -58.15      | -56.98      | -56.98      | -41.2          | -2.63          | 7.65        |
| 802.11ax HEW40_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -48.01        | -55.66        | -55.66      |             |             |             | -41.2          | -6.81          | 7.65        |
| 802.11ax HEW40_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -46.64        | -54.29        | -57.48      | -57.13      |             |             | -41.2          | -5.44          | 7.65        |
| 802.11ax HEW40_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -43.60        | -51.25        | -58.53      | -57.77      | -58.02      | -55.46      | -41.2          | -2.40          | 7.65        |
| 802.11ax HEW80_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -48.50        | -56.15        | -56.15      |             |             |             | -41.2          | -7.30          | 7.65        |
| 802.11ax HEW80_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -46.37        | -54.02        | -57.92      | -56.3       |             |             | -41.2          | -5.17          | 7.65        |
| 802.11ax HEW80_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -43.89        | -51.54        | -57.57      | -57.69      | -58.05      | -57         | -41.2          | -2.69          | 7.65        |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | Pass   | 8G              | 40G            | AV   | -48.41        | -56.06        | -56.06      |             |             |             | -41.2          | -7.21          | 7.65        |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | Pass   | 8G              | 40G            | AV   | -46.29        | -53.94        | -56.63      | -57.29      |             |             | -41.2          | -5.09          | 7.65        |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | Pass   | 8G              | 40G            | AV   | -43.78        | -51.43        | -56.45      | -57.2       | -57.78      | -58.67      | -41.2          | -2.58          | 7.65        |
| 6.875-7.125GHz                  | -      | -               | -              | -    | -             | -             | -           | -           | -           | -           | -              | -              | -           |
| 802.11ax HEW20_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -47.73        | -56.05        | -56.05      |             |             |             | -41.2          | -6.53          | 8.32        |
| 802.11ax HEW20_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -45.92        | -54.24        | -56.08      | -58.85      |             |             | -41.2          | -4.72          | 8.32        |
| 802.11ax HEW20_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -43.10        | -51.42        | -57.65      | -57.41      | -56.53      | -58.39      | -41.2          | -1.90          | 8.32        |
| 802.11ax HEW40_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -48.04        | -56.36        | -56.36      |             |             |             | -41.2          | -6.84          | 8.32        |
| 802.11ax HEW40_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -45.88        | -54.2         | -57.93      | -56.59      |             |             | -41.2          | -4.68          | 8.32        |
| 802.11ax HEW40_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -43.22        | -51.54        | -58.14      | -56.33      | -58.4       | -57.66      | -41.2          | -2.02          | 8.32        |
| 802.11ax HEW80_Nss1,(MCS0)_1TX  | Pass   | 8G              | 40G            | AV   | -48.09        | -56.41        | -56.41      |             |             |             | -41.2          | -6.89          | 8.32        |
| 802.11ax HEW80_Nss1,(MCS0)_2TX  | Pass   | 8G              | 40G            | AV   | -45.92        | -54.24        | -57.14      | -57.36      |             |             | -41.2          | -4.72          | 8.32        |
| 802.11ax HEW80_Nss1,(MCS0)_4TX  | Pass   | 8G              | 40G            | AV   | -43.23        | -51.55        | -57.13      | -56.39      | -58.72      | -58.46      | -41.2          | -2.03          | 8.32        |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | Pass   | 8G              | 40G            | AV   | -48.16        | -56.48        | -56.48      |             |             |             | -41.2          | -6.96          | 8.32        |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | Pass   | 8G              | 40G            | AV   | -45.51        | -53.83        | -56.33      | -57.41      |             |             | -41.2          | -4.31          | 8.32        |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | Pass   | 8G              | 40G            | AV   | -43.24        | -51.56        | -58.84      | -58.57      | -57.82      | -55.79      | -41.2          | -2.04          | 8.32        |

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



**CSE (High Pass Filter)\_Radio 2-1T1S, 2T1S, 4T1S**  
**For other test frequencies (Harmonic 8GHz ~ 40GHz)**

**Appendix E.4**

**Result**

| Mode                            | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | Freq<br>(Hz) | DG<br>(dBi) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) | P4<br>(dBm) | Psum<br>(dBm) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------|--------|-----------------|----------------|------|--------------|-------------|-------------|-------------|-------------|-------------|---------------|---------------|----------------|----------------|
| 802.11ax HEW20_Nss1,(MCS0)_1TX  | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 5955MHz                         | Pass   | 8G              | 40G            | AV   | 11.926G      | 6.00        | -67.88      |             |             |             | -67.88        | -61.88        | -41.2          | -20.68         |
| 5955MHz                         | Pass   | 8G              | 40G            | AV   | 39.86G       | 6.00        | -56.72      |             |             |             | -56.72        | -50.72        | -41.2          | -9.52          |
| 5955MHz                         | Pass   | 8G              | 40G            | PK   | 11.925G      | 6.00        | -62.58      |             |             |             | -62.58        | -56.58        | -21.2          | -35.38         |
| 5955MHz                         | Pass   | 8G              | 40G            | PK   | 39.838G      | 6.00        | -50.6       |             |             |             | -50.6         | -44.60        | -21.2          | -23.40         |
| 6175MHz                         | Pass   | 8G              | 40G            | AV   | 12.333G      | 6.00        | -67.76      |             |             |             | -67.76        | -61.76        | -41.2          | -20.56         |
| 6175MHz                         | Pass   | 8G              | 40G            | AV   | 39.799G      | 6.00        | -56.85      |             |             |             | -56.85        | -50.85        | -41.2          | -9.65          |
| 6175MHz                         | Pass   | 8G              | 40G            | PK   | 12.34G       | 6.00        | -61.18      |             |             |             | -61.18        | -55.18        | -21.2          | -33.98         |
| 6175MHz                         | Pass   | 8G              | 40G            | PK   | 39.873G      | 6.00        | -50.34      |             |             |             | -50.34        | -44.34        | -21.2          | -23.14         |
| 6415MHz                         | Pass   | 8G              | 40G            | AV   | 12.835G      | 6.00        | -68.66      |             |             |             | -68.66        | -62.66        | -27            | -35.66         |
| 6415MHz                         | Pass   | 8G              | 40G            | AV   | 39.8G        | 6.00        | -57.17      |             |             |             | -57.17        | -51.17        | -41.2          | -9.97          |
| 6415MHz                         | Pass   | 8G              | 40G            | PK   | 12.827G      | 6.00        | -63.3       |             |             |             | -63.3         | -57.30        | -7             | -50.30         |
| 6415MHz                         | Pass   | 8G              | 40G            | PK   | 39.067G      | 6.00        | -50.87      |             |             |             | -50.87        | -44.87        | -21.2          | -23.67         |
| 6435MHz                         | Pass   | 8G              | 40G            | AV   | 12.855G      | 4.87        | -67.65      |             |             |             | -67.65        | -62.78        | -27            | -35.78         |
| 6435MHz                         | Pass   | 8G              | 40G            | AV   | 39.821G      | 4.87        | -56.98      |             |             |             | -56.98        | -52.11        | -41.2          | -10.91         |
| 6435MHz                         | Pass   | 8G              | 40G            | PK   | 12.866G      | 4.87        | -62.6       |             |             |             | -62.6         | -57.73        | -7             | -50.73         |
| 6435MHz                         | Pass   | 8G              | 40G            | PK   | 39.831G      | 4.87        | -50.43      |             |             |             | -50.43        | -45.56        | -21.2          | -24.36         |
| 6475MHz                         | Pass   | 8G              | 40G            | AV   | 12.951G      | 4.87        | -67.85      |             |             |             | -67.85        | -62.98        | -27            | -35.98         |
| 6475MHz                         | Pass   | 8G              | 40G            | AV   | 39.818G      | 4.87        | -57.09      |             |             |             | -57.09        | -52.22        | -41.2          | -11.02         |
| 6475MHz                         | Pass   | 8G              | 40G            | PK   | 12.964G      | 4.87        | -61.38      |             |             |             | -61.38        | -56.51        | -7             | -49.51         |
| 6475MHz                         | Pass   | 8G              | 40G            | PK   | 39.871G      | 4.87        | -50.12      |             |             |             | -50.12        | -45.25        | -21.2          | -24.05         |
| 6515MHz                         | Pass   | 8G              | 40G            | AV   | 13.039G      | 4.87        | -67.51      |             |             |             | -67.51        | -62.64        | -27            | -35.64         |
| 6515MHz                         | Pass   | 8G              | 40G            | AV   | 39.786G      | 4.87        | -56.76      |             |             |             | -56.76        | -51.89        | -41.2          | -10.69         |
| 6515MHz                         | Pass   | 8G              | 40G            | PK   | 13.03G       | 4.87        | -61.93      |             |             |             | -61.93        | -57.06        | -7             | -50.06         |
| 6515MHz                         | Pass   | 8G              | 40G            | PK   | 39.747G      | 4.87        | -50.62      |             |             |             | -50.62        | -45.75        | -21.2          | -24.55         |
| 6535MHz                         | Pass   | 8G              | 40G            | AV   | 13.058G      | 7.65        | -67.81      |             |             |             | -67.81        | -60.16        | -27            | -33.16         |
| 6535MHz                         | Pass   | 8G              | 40G            | AV   | 39.875G      | 7.65        | -56.8       |             |             |             | -56.8         | -49.15        | -41.2          | -7.95          |
| 6535MHz                         | Pass   | 8G              | 40G            | PK   | 13.078G      | 7.65        | -62.16      |             |             |             | -62.16        | -54.51        | -7             | -47.51         |
| 6535MHz                         | Pass   | 8G              | 40G            | PK   | 39.834G      | 7.65        | -50.96      |             |             |             | -50.96        | -43.31        | -21.2          | -22.11         |
| 6695MHz                         | Pass   | 8G              | 40G            | AV   | 13.373G      | 7.65        | -67.04      |             |             |             | -67.04        | -59.39        | -41.2          | -18.19         |
| 6695MHz                         | Pass   | 8G              | 40G            | AV   | 39.788G      | 7.65        | -56.63      |             |             |             | -56.63        | -48.98        | -41.2          | -7.78          |
| 6695MHz                         | Pass   | 8G              | 40G            | PK   | 13.39G       | 7.65        | -60.34      |             |             |             | -60.34        | -52.69        | -21.2          | -31.49         |
| 6695MHz                         | Pass   | 8G              | 40G            | PK   | 39.754G      | 7.65        | -50.76      |             |             |             | -50.76        | -43.11        | -21.2          | -21.91         |
| 6855MHz                         | Pass   | 8G              | 40G            | AV   | 13.701G      | 7.65        | -67.3       |             |             |             | -67.3         | -59.65        | -27            | -32.65         |
| 6855MHz                         | Pass   | 8G              | 40G            | AV   | 39.824G      | 7.65        | -56.45      |             |             |             | -56.45        | -48.80        | -41.2          | -7.60          |
| 6855MHz                         | Pass   | 8G              | 40G            | PK   | 13.719G      | 7.65        | -61.1       |             |             |             | -61.1         | -53.45        | -7             | -46.45         |
| 6855MHz                         | Pass   | 8G              | 40G            | PK   | 39.903G      | 7.65        | -50.9       |             |             |             | -50.9         | -43.25        | -21.2          | -22.05         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 13.758G      | 7.65        | -67.35      |             |             |             | -67.35        | -59.70        | -27            | -32.70         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 39.755G      | 7.65        | -57.15      |             |             |             | -57.15        | -49.50        | -41.2          | -8.30          |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 13.758G      | 7.65        | -61.92      |             |             |             | -61.92        | -54.27        | -7             | -47.27         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 39.124G      | 7.65        | -50.47      |             |             |             | -50.47        | -42.82        | -21.2          | -21.62         |
| 6895MHz                         | Pass   | 8G              | 40G            | AV   | 13.794G      | 8.32        | -67.87      |             |             |             | -67.87        | -59.55        | -27            | -32.55         |
| 6895MHz                         | Pass   | 8G              | 40G            | AV   | 39.856G      | 8.32        | -56.78      |             |             |             | -56.78        | -48.46        | -41.2          | -7.26          |
| 6895MHz                         | Pass   | 8G              | 40G            | PK   | 13.795G      | 8.32        | -62.25      |             |             |             | -62.25        | -53.93        | -7             | -46.93         |
| 6895MHz                         | Pass   | 8G              | 40G            | PK   | 39.931G      | 8.32        | -51.03      |             |             |             | -51.03        | -42.71        | -21.2          | -21.51         |
| 6995MHz                         | Pass   | 8G              | 40G            | AV   | 14.001G      | 8.32        | -67.69      |             |             |             | -67.69        | -59.37        | -27            | -32.37         |
| 6995MHz                         | Pass   | 8G              | 40G            | AV   | 39.797G      | 8.32        | -56.55      |             |             |             | -56.55        | -48.23        | -41.2          | -7.03          |
| 6995MHz                         | Pass   | 8G              | 40G            | PK   | 13.993G      | 8.32        | -61.96      |             |             |             | -61.96        | -53.64        | -7             | -46.64         |
| 6995MHz                         | Pass   | 8G              | 40G            | PK   | 39.878G      | 8.32        | -50.55      |             |             |             | -50.55        | -42.23        | -21.2          | -21.03         |
| 7095MHz                         | Pass   | 8G              | 40G            | AV   | 14.204G      | 8.32        | -68.58      |             |             |             | -68.58        | -60.26        | -27            | -33.26         |
| 7095MHz                         | Pass   | 8G              | 40G            | AV   | 39.796G      | 8.32        | -56.05      |             |             |             | -56.05        | -47.73        | -41.2          | -6.53          |
| 7095MHz                         | Pass   | 8G              | 40G            | PK   | 14.178G      | 8.32        | -61.46      |             |             |             | -61.46        | -53.14        | -7             | -46.14         |
| 7095MHz                         | Pass   | 8G              | 40G            | PK   | 39.85G       | 8.32        | -51.44      |             |             |             | -51.44        | -43.12        | -21.2          | -21.92         |
| 802.11ax HEW40_Nss1,(MCS0)_1TX  | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 5965MHz                         | Pass   | 8G              | 40G            | AV   | 11.912G      | 6.00        | -67.28      |             |             |             | -67.28        | -61.28        | -41.2          | -20.08         |
| 5965MHz                         | Pass   | 8G              | 40G            | AV   | 39.867G      | 6.00        | -57.02      |             |             |             | -57.02        | -51.02        | -41.2          | -9.82          |
| 5965MHz                         | Pass   | 8G              | 40G            | PK   | 11.956G      | 6.00        | -61.8       |             |             |             | -61.8         | -55.80        | -21.2          | -34.60         |
| 5965MHz                         | Pass   | 8G              | 40G            | PK   | 39.147G      | 6.00        | -50.8       |             |             |             | -50.8         | -44.80        | -21.2          | -23.60         |
| 6165MHz                         | Pass   | 8G              | 40G            | AV   | 12.339G      | 6.00        | -66.88      |             |             |             | -66.88        | -60.88        | -41.2          | -19.68         |
| 6165MHz                         | Pass   | 8G              | 40G            | AV   | 39.836G      | 6.00        | -56.9       |             |             |             | -56.9         | -50.90        | -41.2          | -9.70          |
| 6165MHz                         | Pass   | 8G              | 40G            | PK   | 12.317G      | 6.00        | -61.27      |             |             |             | -61.27        | -55.27        | -21.2          | -34.07         |
| 6165MHz                         | Pass   | 8G              | 40G            | PK   | 39.773G      | 6.00        | -51.22      |             |             |             | -51.22        | -45.22        | -21.2          | -24.02         |
| 6405MHz                         | Pass   | 8G              | 40G            | AV   | 12.835G      | 6.00        | -67.75      |             |             |             | -67.75        | -61.75        | -27            | -34.75         |
| 6405MHz                         | Pass   | 8G              | 40G            | AV   | 39.551G      | 6.00        | -56.54      |             |             |             | -56.54        | -50.54        | -41.2          | -9.34          |
| 6405MHz                         | Pass   | 8G              | 40G            | PK   | 12.813G      | 6.00        | -62.79      |             |             |             | -62.79        | -56.79        | -7             | -49.79         |
| 6405MHz                         | Pass   | 8G              | 40G            | PK   | 39.819G      | 6.00        | -50.21      |             |             |             | -50.21        | -44.21        | -21.2          | -23.01         |
| 6445MHz                         | Pass   | 8G              | 40G            | AV   | 12.922G      | 4.87        | -68.18      |             |             |             | -68.18        | -63.31        | -27            | -36.31         |
| 6445MHz                         | Pass   | 8G              | 40G            | AV   | 39.815G      | 4.87        | -57.2       |             |             |             | -57.2         | -52.33        | -41.2          | -11.13         |
| 6445MHz                         | Pass   | 8G              | 40G            | PK   | 12.858G      | 4.87        | -60.43      |             |             |             | -60.43        | -55.56        | -7             | -48.56         |



**CSE (High Pass Filter)\_Radio 2-1T1S, 2T1S, 4T1S**  
**For other test frequencies (Harmonic 8GHz ~ 40GHz)**

**Appendix E.4**

| Mode                            | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | Freq<br>(Hz) | DG<br>(dBi) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) | P4<br>(dBm) | Psum<br>(dBm) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------|--------|-----------------|----------------|------|--------------|-------------|-------------|-------------|-------------|-------------|---------------|---------------|----------------|----------------|
| 6445MHz                         | Pass   | 8G              | 40G            | PK   | 39.756G      | 4.87        | -50.2       |             |             |             | -50.2         | -45.33        | -21.2          | -24.13         |
| 6485MHz                         | Pass   | 8G              | 40G            | AV   | 12.99G       | 4.87        | -67.59      |             |             |             | -67.59        | -62.72        | -27            | -35.72         |
| 6485MHz                         | Pass   | 8G              | 40G            | AV   | 39.845G      | 4.87        | -56.49      |             |             |             | -56.49        | -51.62        | -41.2          | -10.42         |
| 6485MHz                         | Pass   | 8G              | 40G            | PK   | 12.98G       | 4.87        | -61.14      |             |             |             | -61.14        | -56.27        | -7             | -49.27         |
| 6485MHz                         | Pass   | 8G              | 40G            | PK   | 39.511G      | 4.87        | -49.51      |             |             |             | -49.51        | -44.64        | -21.2          | -23.44         |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 13.02G       | 4.87        | -67.58      |             |             |             | -67.58        | -62.71        | -27            | -35.71         |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 39.809G      | 4.87        | -56.03      |             |             |             | -56.03        | -51.16        | -41.2          | -9.96          |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 13.067G      | 4.87        | -61.3       |             |             |             | -61.3         | -56.43        | -7             | -49.43         |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 39.822G      | 4.87        | -50.57      |             |             |             | -50.57        | -45.70        | -21.2          | -24.50         |
| 6565MHz                         | Pass   | 8G              | 40G            | AV   | 13.103G      | 7.65        | -66.94      |             |             |             | -66.94        | -59.29        | -27            | -32.29         |
| 6565MHz                         | Pass   | 8G              | 40G            | AV   | 39.798G      | 7.65        | -57.08      |             |             |             | -57.08        | -49.43        | -41.2          | -8.23          |
| 6565MHz                         | Pass   | 8G              | 40G            | PK   | 13.164G      | 7.65        | -61.69      |             |             |             | -61.69        | -54.04        | -7             | -47.04         |
| 6565MHz                         | Pass   | 8G              | 40G            | PK   | 39.812G      | 7.65        | -50.61      |             |             |             | -50.61        | -42.96        | -21.2          | -21.76         |
| 6685MHz                         | Pass   | 8G              | 40G            | AV   | 13.387G      | 7.65        | -66.81      |             |             |             | -66.81        | -59.16        | -41.2          | -17.96         |
| 6685MHz                         | Pass   | 8G              | 40G            | AV   | 39.767G      | 7.65        | -56.62      |             |             |             | -56.62        | -48.97        | -41.2          | -7.77          |
| 6685MHz                         | Pass   | 8G              | 40G            | PK   | 13.352G      | 7.65        | -61.11      |             |             |             | -61.11        | -53.46        | -21.2          | -32.26         |
| 6685MHz                         | Pass   | 8G              | 40G            | PK   | 39.79G       | 7.65        | -50.74      |             |             |             | -50.74        | -43.09        | -21.2          | -21.89         |
| 6845MHz                         | Pass   | 8G              | 40G            | AV   | 13.675G      | 7.65        | -66.4       |             |             |             | -66.4         | -58.75        | -27            | -31.75         |
| 6845MHz                         | Pass   | 8G              | 40G            | AV   | 39.821G      | 7.65        | -55.66      |             |             |             | -55.66        | -48.01        | -41.2          | -6.81          |
| 6845MHz                         | Pass   | 8G              | 40G            | PK   | 13.675G      | 7.65        | -60.95      |             |             |             | -60.95        | -53.30        | -7             | -46.30         |
| 6845MHz                         | Pass   | 8G              | 40G            | PK   | 39.225G      | 7.65        | -51.54      |             |             |             | -51.54        | -43.89        | -21.2          | -22.69         |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 13.785G      | 7.65        | -67.77      |             |             |             | -67.77        | -60.12        | -27            | -33.12         |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 39.845G      | 7.65        | -56.8       |             |             |             | -56.8         | -49.15        | -41.2          | -7.95          |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 13.798G      | 7.65        | -62.38      |             |             |             | -62.38        | -54.73        | -7             | -47.73         |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 39.084G      | 7.65        | -50.74      |             |             |             | -50.74        | -43.09        | -21.2          | -21.89         |
| 6925MHz                         | Pass   | 8G              | 40G            | AV   | 13.842G      | 8.32        | -66.2       |             |             |             | -66.2         | -57.88        | -27            | -30.88         |
| 6925MHz                         | Pass   | 8G              | 40G            | AV   | 39.793G      | 8.32        | -57.02      |             |             |             | -57.02        | -48.70        | -41.2          | -7.50          |
| 6925MHz                         | Pass   | 8G              | 40G            | PK   | 13.83G       | 8.32        | -62.48      |             |             |             | -62.48        | -54.16        | -7             | -47.16         |
| 6925MHz                         | Pass   | 8G              | 40G            | PK   | 39.93G       | 8.32        | -50.83      |             |             |             | -50.83        | -42.51        | -21.2          | -21.31         |
| 7005MHz                         | Pass   | 8G              | 40G            | AV   | 14.006G      | 8.32        | -67.41      |             |             |             | -67.41        | -59.09        | -27            | -32.09         |
| 7005MHz                         | Pass   | 8G              | 40G            | AV   | 39.117G      | 8.32        | -57.19      |             |             |             | -57.19        | -48.87        | -41.2          | -7.67          |
| 7005MHz                         | Pass   | 8G              | 40G            | PK   | 14.019G      | 8.32        | -62.11      |             |             |             | -62.11        | -53.79        | -7             | -46.79         |
| 7005MHz                         | Pass   | 8G              | 40G            | PK   | 39.842G      | 8.32        | -50.65      |             |             |             | -50.65        | -42.33        | -21.2          | -21.13         |
| 7085MHz                         | Pass   | 8G              | 40G            | AV   | 14.193G      | 8.32        | -68.21      |             |             |             | -68.21        | -59.89        | -27            | -32.89         |
| 7085MHz                         | Pass   | 8G              | 40G            | AV   | 39.829G      | 8.32        | -56.36      |             |             |             | -56.36        | -48.04        | -41.2          | -6.84          |
| 7085MHz                         | Pass   | 8G              | 40G            | PK   | 14.189G      | 8.32        | -62.9       |             |             |             | -62.9         | -54.58        | -7             | -47.58         |
| 7085MHz                         | Pass   | 8G              | 40G            | PK   | 39.83G       | 8.32        | -50.33      |             |             |             | -50.33        | -42.01        | -21.2          | -20.81         |
| 802.11ax HEW80_Nss1,(MCS0)_1TX  | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 5985MHz                         | Pass   | 8G              | 40G            | AV   | 11.941G      | 6.00        | -66.77      |             |             |             | -66.77        | -60.77        | -41.2          | -19.57         |
| 5985MHz                         | Pass   | 8G              | 40G            | AV   | 39.843G      | 6.00        | -57.13      |             |             |             | -57.13        | -51.13        | -41.2          | -9.93          |
| 5985MHz                         | Pass   | 8G              | 40G            | PK   | 11.971G      | 6.00        | -61.05      |             |             |             | -61.05        | -55.05        | -21.2          | -33.85         |
| 5985MHz                         | Pass   | 8G              | 40G            | PK   | 39.773G      | 6.00        | -49.57      |             |             |             | -49.57        | -43.57        | -21.2          | -22.37         |
| 6145MHz                         | Pass   | 8G              | 40G            | AV   | 12.301G      | 6.00        | -67.22      |             |             |             | -67.22        | -61.22        | -41.2          | -20.02         |
| 6145MHz                         | Pass   | 8G              | 40G            | AV   | 39.801G      | 6.00        | -56.84      |             |             |             | -56.84        | -50.84        | -41.2          | -9.64          |
| 6145MHz                         | Pass   | 8G              | 40G            | PK   | 12.224G      | 6.00        | -61.94      |             |             |             | -61.94        | -55.94        | -21.2          | -34.74         |
| 6145MHz                         | Pass   | 8G              | 40G            | PK   | 39G          | 6.00        | -51         |             |             |             | -51           | -45.00        | -21.2          | -23.80         |
| 6385MHz                         | Pass   | 8G              | 40G            | AV   | 12.698G      | 6.00        | -69.06      |             |             |             | -69.06        | -63.06        | -41.2          | -21.86         |
| 6385MHz                         | Pass   | 8G              | 40G            | AV   | 39.798G      | 6.00        | -57.08      |             |             |             | -57.08        | -51.08        | -41.2          | -9.88          |
| 6385MHz                         | Pass   | 8G              | 40G            | PK   | 12.7G        | 6.00        | -62.39      |             |             |             | -62.39        | -56.39        | -21.2          | -35.19         |
| 6385MHz                         | Pass   | 8G              | 40G            | PK   | 39.926G      | 6.00        | -50.99      |             |             |             | -50.99        | -44.99        | -21.2          | -23.79         |
| 6465MHz                         | Pass   | 8G              | 40G            | AV   | 12.967G      | 4.87        | -67.62      |             |             |             | -67.62        | -62.75        | -27            | -35.75         |
| 6465MHz                         | Pass   | 8G              | 40G            | AV   | 39.79G       | 4.87        | -56.93      |             |             |             | -56.93        | -52.06        | -41.2          | -10.86         |
| 6465MHz                         | Pass   | 8G              | 40G            | PK   | 12.962G      | 4.87        | -61.63      |             |             |             | -61.63        | -56.76        | -7             | -49.76         |
| 6465MHz                         | Pass   | 8G              | 40G            | PK   | 39.927G      | 4.87        | -50.24      |             |             |             | -50.24        | -45.37        | -21.2          | -24.17         |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 13.028G      | 4.87        | -66.99      |             |             |             | -66.99        | -62.12        | -27            | -35.12         |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 39.877G      | 4.87        | -56.93      |             |             |             | -56.93        | -52.06        | -41.2          | -10.86         |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 13.153G      | 4.87        | -59.51      |             |             |             | -59.51        | -54.64        | -7             | -47.64         |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 39.812G      | 4.87        | -50.45      |             |             |             | -50.45        | -45.58        | -21.2          | -24.38         |
| 6625MHz                         | Pass   | 8G              | 40G            | AV   | 13.32G       | 7.65        | -66.95      |             |             |             | -66.95        | -59.30        | -41.2          | -18.10         |
| 6625MHz                         | Pass   | 8G              | 40G            | AV   | 39.827G      | 7.65        | -56.15      |             |             |             | -56.15        | -48.50        | -41.2          | -7.30          |
| 6625MHz                         | Pass   | 8G              | 40G            | PK   | 13.279G      | 7.65        | -59.71      |             |             |             | -59.71        | -52.06        | -21.2          | -30.86         |
| 6625MHz                         | Pass   | 8G              | 40G            | PK   | 39.868G      | 7.65        | -50.99      |             |             |             | -50.99        | -43.34        | -21.2          | -22.14         |
| 6705MHz                         | Pass   | 8G              | 40G            | AV   | 13.397G      | 7.65        | -66.08      |             |             |             | -66.08        | -58.43        | -41.2          | -17.23         |
| 6705MHz                         | Pass   | 8G              | 40G            | AV   | 39.814G      | 7.65        | -56.65      |             |             |             | -56.65        | -49.00        | -41.2          | -7.80          |
| 6705MHz                         | Pass   | 8G              | 40G            | PK   | 13.393G      | 7.65        | -60.94      |             |             |             | -60.94        | -53.29        | -21.2          | -32.09         |
| 6705MHz                         | Pass   | 8G              | 40G            | PK   | 39.754G      | 7.65        | -50.71      |             |             |             | -50.71        | -43.06        | -21.2          | -21.86         |
| 6785MHz                         | Pass   | 8G              | 40G            | AV   | 13.634G      | 7.65        | -67.03      |             |             |             | -67.03        | -59.38        | -27            | -32.38         |
| 6785MHz                         | Pass   | 8G              | 40G            | AV   | 39.792G      | 7.65        | -56.39      |             |             |             | -56.39        | -48.74        | -41.2          | -7.54          |
| 6785MHz                         | Pass   | 8G              | 40G            | PK   | 13.623G      | 7.65        | -61.58      |             |             |             | -61.58        | -53.93        | -7             | -46.93         |
| 6785MHz                         | Pass   | 8G              | 40G            | PK   | 39.879G      | 7.65        | -51.35      |             |             |             | -51.35        | -43.70        | -21.2          | -22.50         |



**CSE (High Pass Filter)\_Radio 2-1T1S, 2T1S, 4T1S**  
**For other test frequencies (Harmonic 8GHz ~ 40GHz)**

**Appendix E.4**

| Mode                            | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | Freq<br>(Hz) | DG<br>(dBi) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) | P4<br>(dBm) | Psum<br>(dBm) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------|--------|-----------------|----------------|------|--------------|-------------|-------------|-------------|-------------|-------------|---------------|---------------|----------------|----------------|
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 13.704G      | 7.65        | -67.06      |             |             |             | -67.06        | -59.41        | -27            | -32.41         |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 39.856G      | 7.65        | -56.67      |             |             |             | -56.67        | -49.02        | -41.2          | -7.82          |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 13.706G      | 7.65        | -59.6       |             |             |             | -59.6         | -51.95        | -7             | -44.95         |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 39.687G      | 7.65        | -50.86      |             |             |             | -50.86        | -43.21        | -21.2          | -22.01         |
| 6945MHz                         | Pass   | 8G              | 40G            | AV   | 39.832G      | 8.32        | -56.57      |             |             |             | -56.57        | -48.25        | -41.2          | -7.05          |
| 6945MHz                         | Pass   | 8G              | 40G            | PK   | 13.929G      | 8.32        | -61.42      |             |             |             | -61.42        | -53.10        | -7             | -46.10         |
| 6945MHz                         | Pass   | 8G              | 40G            | PK   | 39.872G      | 8.32        | -51.31      |             |             |             | -51.31        | -42.99        | -21.2          | -21.79         |
| 7025MHz                         | Pass   | 8G              | 40G            | AV   | 14.005G      | 8.32        | -67.11      |             |             |             | -67.11        | -58.79        | -27            | -31.79         |
| 7025MHz                         | Pass   | 8G              | 40G            | AV   | 39.79G       | 8.32        | -56.41      |             |             |             | -56.41        | -48.09        | -41.2          | -6.89          |
| 7025MHz                         | Pass   | 8G              | 40G            | PK   | 14.035G      | 8.32        | -61.07      |             |             |             | -61.07        | -52.75        | -7             | -45.75         |
| 7025MHz                         | Pass   | 8G              | 40G            | PK   | 39.457G      | 8.32        | -50.41      |             |             |             | -50.41        | -42.09        | -21.2          | -20.89         |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 6025MHz                         | Pass   | 8G              | 40G            | AV   | 12.061G      | 6.00        | -66.01      |             |             |             | -66.01        | -60.01        | -41.2          | -18.81         |
| 6025MHz                         | Pass   | 8G              | 40G            | AV   | 39.799G      | 6.00        | -56.43      |             |             |             | -56.43        | -50.43        | -41.2          | -9.23          |
| 6025MHz                         | Pass   | 8G              | 40G            | PK   | 11.971G      | 6.00        | -59.4       |             |             |             | -59.4         | -53.40        | -21.2          | -32.20         |
| 6025MHz                         | Pass   | 8G              | 40G            | PK   | 39.09G       | 6.00        | -51         |             |             |             | -51           | -45.00        | -21.2          | -23.80         |
| 6185MHz                         | Pass   | 8G              | 40G            | AV   | 12.466G      | 6.00        | -67.18      |             |             |             | -67.18        | -61.18        | -41.2          | -19.98         |
| 6185MHz                         | Pass   | 8G              | 40G            | AV   | 39.82G       | 6.00        | -56.35      |             |             |             | -56.35        | -50.35        | -41.2          | -9.15          |
| 6185MHz                         | Pass   | 8G              | 40G            | PK   | 12.488G      | 6.00        | -61.24      |             |             |             | -61.24        | -55.24        | -21.2          | -34.04         |
| 6185MHz                         | Pass   | 8G              | 40G            | PK   | 39.579G      | 6.00        | -50.87      |             |             |             | -50.87        | -44.87        | -21.2          | -23.67         |
| 6345MHz                         | Pass   | 8G              | 40G            | AV   | 12.582G      | 6.00        | -67.12      |             |             |             | -67.12        | -61.12        | -41.2          | -19.92         |
| 6345MHz                         | Pass   | 8G              | 40G            | AV   | 39.866G      | 6.00        | -57.01      |             |             |             | -57.01        | -51.01        | -41.2          | -9.81          |
| 6345MHz                         | Pass   | 8G              | 40G            | PK   | 12.601G      | 6.00        | -61.1       |             |             |             | -61.1         | -55.10        | -21.2          | -33.90         |
| 6345MHz                         | Pass   | 8G              | 40G            | PK   | 39.155G      | 6.00        | -51.21      |             |             |             | -51.21        | -45.21        | -21.2          | -24.01         |
| 6505MHz                         | Pass   | 8G              | 40G            | AV   | 13.045G      | 4.87        | -67.2       |             |             |             | -67.2         | -62.33        | -27            | -35.33         |
| 6505MHz                         | Pass   | 8G              | 40G            | AV   | 39.768G      | 4.87        | -57.14      |             |             |             | -57.14        | -52.27        | -41.2          | -11.07         |
| 6505MHz                         | Pass   | 8G              | 40G            | PK   | 13.04G       | 4.87        | -61.09      |             |             |             | -61.09        | -56.22        | -7             | -49.22         |
| 6505MHz                         | Pass   | 8G              | 40G            | PK   | 39.988G      | 4.87        | -50.84      |             |             |             | -50.84        | -45.97        | -21.2          | -24.77         |
| 6665MHz                         | Pass   | 8G              | 40G            | AV   | 13.395G      | 7.65        | -66.77      |             |             |             | -66.77        | -59.12        | -41.2          | -17.92         |
| 6665MHz                         | Pass   | 8G              | 40G            | AV   | 39.854G      | 7.65        | -57.41      |             |             |             | -57.41        | -49.76        | -41.2          | -8.56          |
| 6665MHz                         | Pass   | 8G              | 40G            | PK   | 13.376G      | 7.65        | -60.69      |             |             |             | -60.69        | -53.04        | -21.2          | -31.84         |
| 6665MHz                         | Pass   | 8G              | 40G            | PK   | 39.814G      | 7.65        | -50.4       |             |             |             | -50.4         | -42.75        | -21.2          | -21.55         |
| 6825MHz                         | Pass   | 8G              | 40G            | AV   | 13.684G      | 7.65        | -66.96      |             |             |             | -66.96        | -59.31        | -27            | -32.31         |
| 6825MHz                         | Pass   | 8G              | 40G            | AV   | 39.832G      | 7.65        | -56.06      |             |             |             | -56.06        | -48.41        | -41.2          | -7.21          |
| 6825MHz                         | Pass   | 8G              | 40G            | PK   | 13.72G       | 7.65        | -61.11      |             |             |             | -61.11        | -53.46        | -7             | -46.46         |
| 6825MHz                         | Pass   | 8G              | 40G            | PK   | 39.798G      | 7.65        | -51.15      |             |             |             | -51.15        | -43.50        | -21.2          | -22.30         |
| 6985MHz                         | Pass   | 8G              | 40G            | AV   | 13.995G      | 8.32        | -66.82      |             |             |             | -66.82        | -58.50        | -27            | -31.50         |
| 6985MHz                         | Pass   | 8G              | 40G            | AV   | 39.838G      | 8.32        | -56.48      |             |             |             | -56.48        | -48.16        | -41.2          | -6.96          |
| 6985MHz                         | Pass   | 8G              | 40G            | PK   | 14.1G        | 8.32        | -61.08      |             |             |             | -61.08        | -52.76        | -7             | -45.76         |
| 6985MHz                         | Pass   | 8G              | 40G            | PK   | 39.721G      | 8.32        | -50.8       |             |             |             | -50.8         | -42.48        | -21.2          | -21.28         |
| 802.11ax HEW20_Nss1,(MCS0)_2TX  | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 5955MHz                         | Pass   | 8G              | 40G            | AV   | 11.916G      | 6.49        | -67.9       |             |             |             | -64.89        | -58.40        | -41.2          | -17.20         |
| 5955MHz                         | Pass   | 8G              | 40G            | AV   | 39.796G      | 6.49        | -56.88      |             |             |             | -54.14        | -47.65        | -41.2          | -6.45          |
| 5955MHz                         | Pass   | 8G              | 40G            | PK   | 11.921G      | 6.49        | -64.24      |             |             |             | -59.5         | -53.01        | -21.2          | -31.81         |
| 5955MHz                         | Pass   | 8G              | 40G            | PK   | 39.785G      | 6.49        | -51.56      |             |             |             | -49.19        | -42.70        | -21.2          | -21.50         |
| 6175MHz                         | Pass   | 8G              | 40G            | AV   | 12.359G      | 6.49        | -68.78      |             |             |             | -65.15        | -58.66        | -41.2          | -17.46         |
| 6175MHz                         | Pass   | 8G              | 40G            | AV   | 39.756G      | 6.49        | -57.36      |             |             |             | -54.46        | -47.97        | -41.2          | -6.77          |
| 6175MHz                         | Pass   | 8G              | 40G            | PK   | 12.343G      | 6.49        | -62.98      |             |             |             | -58.68        | -52.19        | -21.2          | -30.99         |
| 6175MHz                         | Pass   | 8G              | 40G            | PK   | 39.138G      | 6.49        | -52.34      |             |             |             | -49.24        | -42.75        | -21.2          | -21.55         |
| 6415MHz                         | Pass   | 8G              | 40G            | AV   | 12.847G      | 6.49        | -68.13      |             |             |             | -65.42        | -58.93        | -27            | -31.93         |
| 6415MHz                         | Pass   | 8G              | 40G            | AV   | 39.835G      | 6.49        | -58.18      |             |             |             | -54.23        | -47.74        | -41.2          | -6.54          |
| 6415MHz                         | Pass   | 8G              | 40G            | PK   | 12.824G      | 6.49        | -61.96      |             |             |             | -60.52        | -54.03        | -7             | -47.03         |
| 6415MHz                         | Pass   | 8G              | 40G            | PK   | 39.852G      | 6.49        | -52         |             |             |             | -49.05        | -42.56        | -21.2          | -21.36         |
| 6435MHz                         | Pass   | 8G              | 40G            | AV   | 12.875G      | 5.90        | -69.66      |             |             |             | -65.73        | -59.83        | -27            | -32.83         |
| 6435MHz                         | Pass   | 8G              | 40G            | AV   | 39.824G      | 5.90        | -57.21      |             |             |             | -54.48        | -48.58        | -41.2          | -7.38          |
| 6435MHz                         | Pass   | 8G              | 40G            | PK   | 12.884G      | 5.90        | -62.92      |             |             |             | -59.91        | -54.01        | -7             | -47.01         |
| 6435MHz                         | Pass   | 8G              | 40G            | PK   | 39.665G      | 5.90        | -51.22      |             |             |             | -49.15        | -43.25        | -21.2          | -22.05         |
| 6475MHz                         | Pass   | 8G              | 40G            | AV   | 12.938G      | 5.90        | -68.19      |             |             |             | -65.41        | -59.51        | -27            | -32.51         |
| 6475MHz                         | Pass   | 8G              | 40G            | AV   | 39.861G      | 5.90        | -57.73      |             |             |             | -54.25        | -48.35        | -41.2          | -7.15          |
| 6475MHz                         | Pass   | 8G              | 40G            | PK   | 12.935G      | 5.90        | -62.52      |             |             |             | -59.71        | -53.81        | -7             | -46.81         |
| 6475MHz                         | Pass   | 8G              | 40G            | PK   | 39.756G      | 5.90        | -54.06      |             |             |             | -49.01        | -43.11        | -21.2          | -21.91         |
| 6515MHz                         | Pass   | 8G              | 40G            | AV   | 13.021G      | 5.90        | -66.75      |             |             |             | -64.59        | -58.69        | -27            | -31.69         |
| 6515MHz                         | Pass   | 8G              | 40G            | AV   | 39.81G       | 5.90        | -58.14      |             |             |             | -54.32        | -48.42        | -41.2          | -7.22          |
| 6515MHz                         | Pass   | 8G              | 40G            | PK   | 13.015G      | 5.90        | -62.94      |             |             |             | -59.93        | -54.03        | -7             | -47.03         |
| 6515MHz                         | Pass   | 8G              | 40G            | PK   | 39.811G      | 5.90        | -50.1       |             |             |             | -48.68        | -42.78        | -21.2          | -21.58         |
| 6535MHz                         | Pass   | 8G              | 40G            | AV   | 13.055G      | 7.65        | -67.36      |             |             |             | -64.49        | -56.84        | -27            | -29.84         |
| 6535MHz                         | Pass   | 8G              | 40G            | AV   | 39.83G       | 7.65        | -57.45      |             |             |             | -54.09        | -46.44        | -41.2          | -5.24          |
| 6535MHz                         | Pass   | 8G              | 40G            | PK   | 13.052G      | 7.65        | -64.81      |             |             |             | -59.21        | -51.56        | -7             | -44.56         |
| 6535MHz                         | Pass   | 8G              | 40G            | PK   | 39.772G      | 7.65        | -52.53      |             |             |             | -48.79        | -41.14        | -21.2          | -19.94         |
| 6695MHz                         | Pass   | 8G              | 40G            | AV   | 13.377G      | 7.65        | -67.01      |             |             |             | -64.21        | -56.56        | -41.2          | -15.36         |



**CSE (High Pass Filter)\_Radio 2-1T1S, 2T1S, 4T1S**  
**For other test frequencies (Harmonic 8GHz ~ 40GHz)**

**Appendix E.4**

| Mode                            | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | Freq<br>(Hz) | DG<br>(dBi) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) | P4<br>(dBm) | Psum<br>(dBm) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------|--------|-----------------|----------------|------|--------------|-------------|-------------|-------------|-------------|-------------|---------------|---------------|----------------|----------------|
| 6695MHz                         | Pass   | 8G              | 40G            | AV   | 39.839G      | 7.65        | -57.7       | -57.23      |             |             | -54.45        | -46.80        | -41.2          | -5.60          |
| 6695MHz                         | Pass   | 8G              | 40G            | PK   | 13.389G      | 7.65        | -65.91      | -60.82      |             |             | -59.65        | -52.00        | -21.2          | -30.80         |
| 6695MHz                         | Pass   | 8G              | 40G            | PK   | 39.867G      | 7.65        | -51.09      | -52.62      |             |             | -48.78        | -41.13        | -21.2          | -19.93         |
| 6855MHz                         | Pass   | 8G              | 40G            | AV   | 13.7G        | 7.65        | -67.15      | -68.18      |             |             | -64.62        | -56.97        | -27            | -29.97         |
| 6855MHz                         | Pass   | 8G              | 40G            | AV   | 39.782G      | 7.65        | -57.34      | -57.34      |             |             | -54.33        | -46.68        | -41.2          | -5.48          |
| 6855MHz                         | Pass   | 8G              | 40G            | PK   | 13.7G        | 7.65        | -64.09      | -60.76      |             |             | -59.1         | -51.45        | -7             | -44.45         |
| 6855MHz                         | Pass   | 8G              | 40G            | PK   | 39.854G      | 7.65        | -54.32      | -49.96      |             |             | -48.6         | -40.95        | -21.2          | -19.75         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 13.745G      | 7.65        | -68.19      | -68.34      |             |             | -65.25        | -57.60        | -27            | -30.60         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 39.82G       | 7.65        | -58.16      | -56.87      |             |             | -54.46        | -46.81        | -41.2          | -5.61          |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 13.763G      | 7.65        | -62.48      | -63.03      |             |             | -59.74        | -52.09        | -7             | -45.09         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 39.853G      | 7.65        | -53.47      | -51.36      |             |             | -49.28        | -41.63        | -21.2          | -20.43         |
| 6895MHz                         | Pass   | 8G              | 40G            | AV   | 13.785G      | 8.32        | -67.91      | -68.2       |             |             | -65.04        | -56.72        | -27            | -29.72         |
| 6895MHz                         | Pass   | 8G              | 40G            | AV   | 39.834G      | 8.32        | -58.05      | -57.23      |             |             | -54.61        | -46.29        | -41.2          | -5.09          |
| 6895MHz                         | Pass   | 8G              | 40G            | PK   | 13.807G      | 8.32        | -62.96      | -62.56      |             |             | -59.75        | -51.43        | -7             | -44.43         |
| 6895MHz                         | Pass   | 8G              | 40G            | PK   | 39.751G      | 8.32        | -51.48      | -51.43      |             |             | -48.44        | -40.12        | -21.2          | -18.92         |
| 6895MHz                         | Pass   | 8G              | 40G            | AV   | 13.98G       | 8.32        | -68.41      | -67.02      |             |             | -64.65        | -56.33        | -27            | -29.33         |
| 6895MHz                         | Pass   | 8G              | 40G            | AV   | 39.829G      | 8.32        | -58.56      | -56.67      |             |             | -54.5         | -46.18        | -41.2          | -4.98          |
| 6895MHz                         | Pass   | 8G              | 40G            | PK   | 14.002G      | 8.32        | -63.33      | -62.61      |             |             | -59.94        | -51.62        | -7             | -44.62         |
| 6895MHz                         | Pass   | 8G              | 40G            | PK   | 39.832G      | 8.32        | -56.5       | -49.1       |             |             | -48.37        | -40.05        | -21.2          | -18.85         |
| 7095MHz                         | Pass   | 8G              | 40G            | AV   | 14.173G      | 8.32        | -68.86      | -67.85      |             |             | -65.32        | -57.00        | -27            | -30.00         |
| 7095MHz                         | Pass   | 8G              | 40G            | AV   | 39.846G      | 8.32        | -56.08      | -58.85      |             |             | -54.24        | -45.92        | -41.2          | -4.72          |
| 7095MHz                         | Pass   | 8G              | 40G            | PK   | 14.203G      | 8.32        | -64.52      | -63.64      |             |             | -61.05        | -52.73        | -7             | -45.73         |
| 7095MHz                         | Pass   | 8G              | 40G            | PK   | 39.812G      | 8.32        | -52.95      | -50.88      |             |             | -48.78        | -40.46        | -21.2          | -19.26         |
| 802.11ax HEW40_Nss1,(MCS0)_2TX  | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 5965MHz                         | Pass   | 8G              | 40G            | AV   | 11.939G      | 6.49        | -68.36      | -67.38      |             |             | -64.83        | -58.34        | -41.2          | -17.14         |
| 5965MHz                         | Pass   | 8G              | 40G            | AV   | 39.855G      | 6.49        | -56.87      | -57.89      |             |             | -54.34        | -47.85        | -41.2          | -6.65          |
| 5965MHz                         | Pass   | 8G              | 40G            | PK   | 11.956G      | 6.49        | -62.66      | -62.13      |             |             | -59.38        | -52.89        | -21.2          | -31.69         |
| 5965MHz                         | Pass   | 8G              | 40G            | PK   | 39.804G      | 6.49        | -51.03      | -53.22      |             |             | -48.98        | -42.49        | -21.2          | -21.29         |
| 6165MHz                         | Pass   | 8G              | 40G            | AV   | 12.327G      | 6.49        | -66.7       | -68.75      |             |             | -64.59        | -58.10        | -41.2          | -16.90         |
| 6165MHz                         | Pass   | 8G              | 40G            | AV   | 39.831G      | 6.49        | -57.68      | -57         |             |             | -54.32        | -47.83        | -41.2          | -6.63          |
| 6165MHz                         | Pass   | 8G              | 40G            | PK   | 12.365G      | 6.49        | -62.01      | -63.91      |             |             | -59.85        | -53.36        | -21.2          | -32.16         |
| 6165MHz                         | Pass   | 8G              | 40G            | PK   | 39.797G      | 6.49        | -51.45      | -51.11      |             |             | -48.27        | -41.78        | -21.2          | -20.58         |
| 6405MHz                         | Pass   | 8G              | 40G            | AV   | 12.839G      | 6.49        | -69.49      | -68.17      |             |             | -65.77        | -59.28        | -27            | -32.28         |
| 6405MHz                         | Pass   | 8G              | 40G            | AV   | 39.854G      | 6.49        | -58.51      | -56.65      |             |             | -54.47        | -47.98        | -41.2          | -6.78          |
| 6405MHz                         | Pass   | 8G              | 40G            | PK   | 12.839G      | 6.49        | -62.82      | -64.05      |             |             | -60.38        | -53.89        | -7             | -46.89         |
| 6405MHz                         | Pass   | 8G              | 40G            | PK   | 39.832G      | 6.49        | -52.58      | -50.53      |             |             | -48.42        | -41.93        | -21.2          | -20.73         |
| 6445MHz                         | Pass   | 8G              | 40G            | AV   | 12.886G      | 5.90        | -67.93      | -68.24      |             |             | -65.07        | -59.17        | -27            | -32.17         |
| 6445MHz                         | Pass   | 8G              | 40G            | AV   | 39.786G      | 5.90        | -57.77      | -57.53      |             |             | -54.64        | -48.74        | -41.2          | -7.54          |
| 6445MHz                         | Pass   | 8G              | 40G            | PK   | 12.854G      | 5.90        | -65.52      | -61.81      |             |             | -60.27        | -54.37        | -7             | -47.37         |
| 6445MHz                         | Pass   | 8G              | 40G            | PK   | 39.768G      | 5.90        | -51.43      | -52.32      |             |             | -48.84        | -42.94        | -21.2          | -21.74         |
| 6485MHz                         | Pass   | 8G              | 40G            | AV   | 12.986G      | 5.90        | -66.89      | -68.3       |             |             | -64.53        | -58.63        | -27            | -31.63         |
| 6485MHz                         | Pass   | 8G              | 40G            | AV   | 39.798G      | 5.90        | -57.31      | -57.19      |             |             | -54.24        | -48.34        | -41.2          | -7.14          |
| 6485MHz                         | Pass   | 8G              | 40G            | PK   | 12.985G      | 5.90        | -61.92      | -63.33      |             |             | -59.56        | -53.66        | -7             | -46.66         |
| 6485MHz                         | Pass   | 8G              | 40G            | PK   | 39.188G      | 5.90        | -55.02      | -49.63      |             |             | -48.53        | -42.63        | -21.2          | -21.43         |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 13.021G      | 5.90        | -67.29      | -68.17      |             |             | -64.7         | -58.80        | -27            | -31.80         |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 39.818G      | 5.90        | -57.09      | -57.91      |             |             | -54.47        | -48.57        | -41.2          | -7.37          |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 13.094G      | 5.90        | -60.03      | -64.37      |             |             | -58.67        | -52.77        | -7             | -45.77         |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 39.1G        | 5.90        | -53.38      | -51.81      |             |             | -49.51        | -43.61        | -21.2          | -22.41         |
| 6565MHz                         | Pass   | 8G              | 40G            | AV   | 13.119G      | 7.65        | -67.43      | -68.15      |             |             | -64.76        | -57.11        | -27            | -30.11         |
| 6565MHz                         | Pass   | 8G              | 40G            | AV   | 39.804G      | 7.65        | -57.52      | -57.76      |             |             | -54.63        | -46.98        | -41.2          | -5.78          |
| 6565MHz                         | Pass   | 8G              | 40G            | PK   | 13.1G        | 7.65        | -62.68      | -62.6       |             |             | -59.63        | -51.98        | -7             | -44.98         |
| 6565MHz                         | Pass   | 8G              | 40G            | PK   | 39.839G      | 7.65        | -51.36      | -52.86      |             |             | -49.04        | -41.39        | -21.2          | -20.19         |
| 6685MHz                         | Pass   | 8G              | 40G            | AV   | 13.397G      | 7.65        | -66.62      | -66.35      |             |             | -63.47        | -55.82        | -41.2          | -14.62         |
| 6685MHz                         | Pass   | 8G              | 40G            | AV   | 39.848G      | 7.65        | -56.09      | -59.13      |             |             | -54.34        | -46.69        | -41.2          | -5.49          |
| 6685MHz                         | Pass   | 8G              | 40G            | PK   | 13.36G       | 7.65        | -63.87      | -61.49      |             |             | -59.51        | -51.86        | -21.2          | -30.66         |
| 6685MHz                         | Pass   | 8G              | 40G            | PK   | 39.827G      | 7.65        | -56.7       | -49.83      |             |             | -49.02        | -41.37        | -21.2          | -20.17         |
| 6845MHz                         | Pass   | 8G              | 40G            | AV   | 13.699G      | 7.65        | -67.42      | -67.71      |             |             | -64.55        | -56.90        | -27            | -29.90         |
| 6845MHz                         | Pass   | 8G              | 40G            | AV   | 39.848G      | 7.65        | -57.48      | -57.13      |             |             | -54.29        | -46.64        | -41.2          | -5.44          |
| 6845MHz                         | Pass   | 8G              | 40G            | PK   | 13.707G      | 7.65        | -61.1       | -64.87      |             |             | -59.58        | -51.93        | -7             | -44.93         |
| 6845MHz                         | Pass   | 8G              | 40G            | PK   | 39.99G       | 7.65        | -52         | -51.79      |             |             | -48.88        | -41.23        | -21.2          | -20.03         |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 13.764G      | 7.65        | -68.16      | -68.02      |             |             | -65.08        | -57.43        | -27            | -30.43         |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 39.787G      | 7.65        | -57.76      | -57.07      |             |             | -54.39        | -46.74        | -41.2          | -5.54          |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 13.743G      | 7.65        | -65.24      | -60.95      |             |             | -59.58        | -51.93        | -7             | -44.93         |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 39.827G      | 7.65        | -52.77      | -51.52      |             |             | -49.09        | -41.44        | -21.2          | -20.24         |
| 6925MHz                         | Pass   | 8G              | 40G            | AV   | 13.867G      | 8.32        | -66.96      | -68.3       |             |             | -64.57        | -56.25        | -27            | -29.25         |
| 6925MHz                         | Pass   | 8G              | 40G            | AV   | 39.858G      | 8.32        | -57.93      | -56.59      |             |             | -54.2         | -45.88        | -41.2          | -4.68          |
| 6925MHz                         | Pass   | 8G              | 40G            | PK   | 13.826G      | 8.32        | -62.67      | -62.51      |             |             | -59.58        | -51.26        | -7             | -44.26         |
| 6925MHz                         | Pass   | 8G              | 40G            | PK   | 39.953G      | 8.32        | -54.26      | -50.86      |             |             | -49.23        | -40.91        | -21.2          | -19.71         |
| 7005MHz                         | Pass   | 8G              | 40G            | AV   | 14.004G      | 8.32        | -67.55      | -67.71      |             |             | -64.62        | -56.30        | -27            | -29.30         |
| 7005MHz                         | Pass   | 8G              | 40G            | AV   | 39.872G      | 8.32        | -58.1       | -56.76      |             |             | -54.37        | -46.05        | -41.2          | -4.85          |



**CSE (High Pass Filter)\_Radio 2-1T1S, 2T1S, 4T1S**  
**For other test frequencies (Harmonic 8GHz ~ 40GHz)**

**Appendix E.4**

| Mode                            | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | Freq<br>(Hz) | DG<br>(dBi) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) | P4<br>(dBm) | Psum<br>(dBm) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------|--------|-----------------|----------------|------|--------------|-------------|-------------|-------------|-------------|-------------|---------------|---------------|----------------|----------------|
| 7005MHz                         | Pass   | 8G              | 40G            | PK   | 13.999G      | 8.32        | -62.43      | -61.93      |             |             | -59.16        | -50.84        | -7             | -43.84         |
| 7005MHz                         | Pass   | 8G              | 40G            | PK   | 39.698G      | 8.32        | -51.1       | -52.51      |             |             | -48.74        | -40.42        | -21.2          | -19.22         |
| 7085MHz                         | Pass   | 8G              | 40G            | AV   | 14.136G      | 8.32        | -69.93      | -68.06      |             |             | -65.88        | -57.56        | -27            | -30.56         |
| 7085MHz                         | Pass   | 8G              | 40G            | AV   | 39.804G      | 8.32        | -56.63      | -58.13      |             |             | -54.31        | -45.99        | -41.2          | -4.79          |
| 7085MHz                         | Pass   | 8G              | 40G            | PK   | 14.191G      | 8.32        | -61.29      | -66.34      |             |             | -60.11        | -51.79        | -7             | -44.79         |
| 7085MHz                         | Pass   | 8G              | 40G            | PK   | 39.585G      | 8.32        | -50.12      | -56.27      |             |             | -49.18        | -40.86        | -21.2          | -19.66         |
| 802.11ax HEW80_Nss1,(MCS0)_2TX  | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 5985MHz                         | Pass   | 8G              | 40G            | AV   | 12.04G       | 6.49        | -65.78      | -68.51      |             |             | -63.92        | -57.43        | -41.2          | -16.23         |
| 5985MHz                         | Pass   | 8G              | 40G            | AV   | 39.819G      | 6.49        | -57.55      | -57.79      |             |             | -54.66        | -48.17        | -41.2          | -6.97          |
| 5985MHz                         | Pass   | 8G              | 40G            | PK   | 12.025G      | 6.49        | -62.22      | -61.2       |             |             | -58.67        | -52.18        | -21.2          | -30.98         |
| 5985MHz                         | Pass   | 8G              | 40G            | PK   | 39.501G      | 6.49        | -53.91      | -50.3       |             |             | -48.73        | -42.24        | -21.2          | -21.04         |
| 6145MHz                         | Pass   | 8G              | 40G            | AV   | 12.315G      | 6.49        | -66.81      | -67.56      |             |             | -64.16        | -57.67        | -41.2          | -16.47         |
| 6145MHz                         | Pass   | 8G              | 40G            | AV   | 39.8G        | 6.49        | -57.52      | -56.63      |             |             | -54.04        | -47.55        | -41.2          | -6.35          |
| 6145MHz                         | Pass   | 8G              | 40G            | PK   | 12.252G      | 6.49        | -61.32      | -64.48      |             |             | -59.61        | -53.12        | -21.2          | -31.92         |
| 6145MHz                         | Pass   | 8G              | 40G            | PK   | 39.793G      | 6.49        | -50.71      | -53.35      |             |             | -48.82        | -42.33        | -21.2          | -21.13         |
| 6385MHz                         | Pass   | 8G              | 40G            | AV   | 12.698G      | 6.49        | -68.36      | -69.06      |             |             | -65.69        | -59.20        | -41.2          | -18.00         |
| 6385MHz                         | Pass   | 8G              | 40G            | AV   | 39.856G      | 6.49        | -57.44      | -56.99      |             |             | -54.2         | -47.71        | -41.2          | -6.51          |
| 6385MHz                         | Pass   | 8G              | 40G            | PK   | 12.698G      | 6.49        | -62.89      | -63.83      |             |             | -60.32        | -53.83        | -21.2          | -32.63         |
| 6385MHz                         | Pass   | 8G              | 40G            | PK   | 39.21G       | 6.49        | -51.96      | -51.35      |             |             | -48.63        | -42.14        | -21.2          | -20.94         |
| 6465MHz                         | Pass   | 8G              | 40G            | AV   | 12.986G      | 5.90        | -67.81      | -68.13      |             |             | -64.96        | -59.06        | -27            | -32.06         |
| 6465MHz                         | Pass   | 8G              | 40G            | AV   | 39.804G      | 5.90        | -57.41      | -57.64      |             |             | -54.51        | -48.61        | -41.2          | -7.41          |
| 6465MHz                         | Pass   | 8G              | 40G            | PK   | 12.979G      | 5.90        | -63.13      | -61.38      |             |             | -59.16        | -53.26        | -7             | -46.26         |
| 6465MHz                         | Pass   | 8G              | 40G            | PK   | 39.819G      | 5.90        | -51.22      | -53.39      |             |             | -49.16        | -43.26        | -21.2          | -22.06         |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 13.041G      | 5.90        | -68.91      | -66.8       |             |             | -64.72        | -58.82        | -27            | -31.82         |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 39.799G      | 5.90        | -56.85      | -58.01      |             |             | -54.38        | -48.48        | -41.2          | -7.28          |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 13.115G      | 5.90        | -62.07      | -62.45      |             |             | -59.25        | -53.35        | -7             | -46.35         |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 39.908G      | 5.90        | -52.71      | -51.56      |             |             | -49.09        | -43.19        | -21.2          | -21.99         |
| 6625MHz                         | Pass   | 8G              | 40G            | AV   | 13.269G      | 7.65        | -67.56      | -66.59      |             |             | -64.04        | -56.39        | -41.2          | -15.19         |
| 6625MHz                         | Pass   | 8G              | 40G            | AV   | 39.827G      | 7.65        | -58.17      | -56.36      |             |             | -54.16        | -46.51        | -41.2          | -5.31          |
| 6625MHz                         | Pass   | 8G              | 40G            | PK   | 13.301G      | 7.65        | -60.44      | -63.7       |             |             | -58.76        | -51.11        | -21.2          | -29.91         |
| 6625MHz                         | Pass   | 8G              | 40G            | PK   | 39.847G      | 7.65        | -53.95      | -50.35      |             |             | -48.78        | -41.13        | -21.2          | -19.93         |
| 6705MHz                         | Pass   | 8G              | 40G            | AV   | 13.346G      | 7.65        | -67.46      | -67.17      |             |             | -64.3         | -56.65        | -41.2          | -15.45         |
| 6705MHz                         | Pass   | 8G              | 40G            | AV   | 39.867G      | 7.65        | -57.92      | -56.3       |             |             | -54.02        | -46.37        | -41.2          | -5.17          |
| 6705MHz                         | Pass   | 8G              | 40G            | PK   | 13.388G      | 7.65        | -60.55      | -61.4       |             |             | -57.94        | -50.29        | -21.2          | -29.09         |
| 6705MHz                         | Pass   | 8G              | 40G            | PK   | 39.807G      | 7.65        | -52.94      | -51.43      |             |             | -49.11        | -41.46        | -21.2          | -20.26         |
| 6785MHz                         | Pass   | 8G              | 40G            | AV   | 13.558G      | 7.65        | -67.23      | -68.08      |             |             | -64.62        | -56.97        | -27            | -29.97         |
| 6785MHz                         | Pass   | 8G              | 40G            | AV   | 39.813G      | 7.65        | -57.78      | -56.97      |             |             | -54.35        | -46.70        | -41.2          | -5.50          |
| 6785MHz                         | Pass   | 8G              | 40G            | PK   | 13.619G      | 7.65        | -60.56      | -60.56      |             |             | -57.55        | -49.90        | -7             | -42.90         |
| 6785MHz                         | Pass   | 8G              | 40G            | PK   | 39.869G      | 7.65        | -50.05      | -54.5       |             |             | -48.72        | -41.07        | -21.2          | -19.87         |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 13.687G      | 7.65        | -66.97      | -67.67      |             |             | -64.3         | -56.65        | -27            | -29.65         |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 39.835G      | 7.65        | -56.68      | -58.31      |             |             | -54.41        | -46.76        | -41.2          | -5.56          |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 13.671G      | 7.65        | -64.8       | -61.21      |             |             | -59.63        | -51.98        | -7             | -44.98         |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 39.885G      | 7.65        | -49.21      | -55.45      |             |             | -48.28        | -40.63        | -21.2          | -19.43         |
| 6945MHz                         | Pass   | 8G              | 40G            | AV   | 13.875G      | 8.32        | -67.49      | -67.49      |             |             | -64.48        | -56.16        | -27            | -29.16         |
| 6945MHz                         | Pass   | 8G              | 40G            | AV   | 39.849G      | 8.32        | -57.14      | -57.36      |             |             | -54.24        | -45.92        | -41.2          | -4.72          |
| 6945MHz                         | Pass   | 8G              | 40G            | PK   | 13.894G      | 8.32        | -62.48      | -61.84      |             |             | -59.14        | -50.82        | -7             | -43.82         |
| 6945MHz                         | Pass   | 8G              | 40G            | PK   | 39.838G      | 8.32        | -50.65      | -53.06      |             |             | -48.68        | -40.36        | -21.2          | -19.16         |
| 7025MHz                         | Pass   | 8G              | 40G            | AV   | 14.001G      | 8.32        | -66.4       | -68.17      |             |             | -64.19        | -55.87        | -27            | -28.87         |
| 7025MHz                         | Pass   | 8G              | 40G            | AV   | 39.856G      | 8.32        | -57.32      | -57.55      |             |             | -54.42        | -46.10        | -41.2          | -4.90          |
| 7025MHz                         | Pass   | 8G              | 40G            | PK   | 13.997G      | 8.32        | -63.32      | -61.71      |             |             | -59.43        | -51.11        | -7             | -44.11         |
| 7025MHz                         | Pass   | 8G              | 40G            | PK   | 39.137G      | 8.32        | -51.57      | -53.24      |             |             | -49.31        | -40.99        | -21.2          | -19.79         |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 6025MHz                         | Pass   | 8G              | 40G            | AV   | 12.061G      | 6.49        | -67.05      | -67.21      |             |             | -64.12        | -57.63        | -41.2          | -16.43         |
| 6025MHz                         | Pass   | 8G              | 40G            | AV   | 39.832G      | 6.49        | -56.36      | -58.69      |             |             | -54.36        | -47.87        | -41.2          | -6.67          |
| 6025MHz                         | Pass   | 8G              | 40G            | PK   | 12.182G      | 6.49        | -61.38      | -61.02      |             |             | -58.19        | -51.70        | -21.2          | -30.50         |
| 6025MHz                         | Pass   | 8G              | 40G            | PK   | 39.718G      | 6.49        | -51.34      | -53.02      |             |             | -49.09        | -42.60        | -21.2          | -21.40         |
| 6185MHz                         | Pass   | 8G              | 40G            | AV   | 12.394G      | 6.49        | -67.22      | -67.22      |             |             | -64.21        | -57.72        | -41.2          | -16.52         |
| 6185MHz                         | Pass   | 8G              | 40G            | AV   | 39.792G      | 6.49        | -57.03      | -56.92      |             |             | -53.96        | -47.47        | -41.2          | -6.27          |
| 6185MHz                         | Pass   | 8G              | 40G            | PK   | 12.351G      | 6.49        | -61.2       | -63.18      |             |             | -59.07        | -52.58        | -21.2          | -31.38         |
| 6185MHz                         | Pass   | 8G              | 40G            | PK   | 39.811G      | 6.49        | -55.49      | -49.95      |             |             | -48.88        | -42.39        | -21.2          | -21.19         |
| 6345MHz                         | Pass   | 8G              | 40G            | AV   | 12.642G      | 6.49        | -67.95      | -67.63      |             |             | -64.78        | -58.29        | -41.2          | -17.09         |
| 6345MHz                         | Pass   | 8G              | 40G            | AV   | 39.79G       | 6.49        | -58.74      | -56.41      |             |             | -54.41        | -47.92        | -41.2          | -6.72          |
| 6345MHz                         | Pass   | 8G              | 40G            | PK   | 12.62G       | 6.49        | -60.7       | -62.79      |             |             | -58.61        | -52.12        | -21.2          | -30.92         |
| 6345MHz                         | Pass   | 8G              | 40G            | PK   | 39.832G      | 6.49        | -50.96      | -52         |             |             | -48.44        | -41.95        | -21.2          | -20.75         |
| 6505MHz                         | Pass   | 8G              | 40G            | AV   | 12.999G      | 5.90        | -67.78      | -67.46      |             |             | -64.61        | -58.71        | -27            | -31.71         |
| 6505MHz                         | Pass   | 8G              | 40G            | AV   | 39.854G      | 5.90        | -56.34      | -57.53      |             |             | -53.88        | -47.98        | -41.2          | -6.78          |
| 6505MHz                         | Pass   | 8G              | 40G            | PK   | 13.039G      | 5.90        | -61.74      | -61.52      |             |             | -58.62        | -52.72        | -7             | -45.72         |
| 6505MHz                         | Pass   | 8G              | 40G            | PK   | 39.816G      | 5.90        | -51.98      | -52.23      |             |             | -49.09        | -43.19        | -21.2          | -21.99         |
| 6665MHz                         | Pass   | 8G              | 40G            | AV   | 13.327G      | 7.65        | -67.7       | -66.83      |             |             | -64.23        | -56.58        | -41.2          | -15.38         |
| 6665MHz                         | Pass   | 8G              | 40G            | AV   | 39.773G      | 7.65        | -57.77      | -56.99      |             |             | -54.35        | -46.70        | -41.2          | -5.50          |



**CSE (High Pass Filter)\_Radio 2-1T1S, 2T1S, 4T1S**  
**For other test frequencies (Harmonic 8GHz ~ 40GHz)**

**Appendix E.4**

| Mode                            | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | Freq<br>(Hz) | DG<br>(dBi) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) | P4<br>(dBm) | Psum<br>(dBm) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------|--------|-----------------|----------------|------|--------------|-------------|-------------|-------------|-------------|-------------|---------------|---------------|----------------|----------------|
| 6665MHz                         | Pass   | 8G              | 40G            | PK   | 13.368G      | 7.65        | -61.01      | -62.47      |             |             | -58.67        | -51.02        | -21.2          | -29.82         |
| 6665MHz                         | Pass   | 8G              | 40G            | PK   | 39.843G      | 7.65        | -52.21      | -52.73      |             |             | -49.45        | -41.80        | -21.2          | -20.60         |
| 6825MHz                         | Pass   | 8G              | 40G            | AV   | 13.649G      | 7.65        | -67.27      | -67.27      |             |             | -64.26        | -56.61        | -27            | -29.61         |
| 6825MHz                         | Pass   | 8G              | 40G            | AV   | 39.8G        | 7.65        | -56.63      | -57.29      |             |             | -53.94        | -46.29        | -41.2          | -5.09          |
| 6825MHz                         | Pass   | 8G              | 40G            | PK   | 13.663G      | 7.65        | -61.47      | -62.22      |             |             | -58.82        | -51.17        | -7             | -44.17         |
| 6825MHz                         | Pass   | 8G              | 40G            | PK   | 39.863G      | 7.65        | -49.88      | -55.71      |             |             | -48.87        | -41.22        | -21.2          | -20.02         |
| 6985MHz                         | Pass   | 8G              | 40G            | AV   | 13.902G      | 8.32        | -67.65      | -66.92      |             |             | -64.26        | -55.94        | -27            | -28.94         |
| 6985MHz                         | Pass   | 8G              | 40G            | AV   | 39.808G      | 8.32        | -56.33      | -57.41      |             |             | -53.83        | -45.51        | -41.2          | -4.31          |
| 6985MHz                         | Pass   | 8G              | 40G            | PK   | 13.877G      | 8.32        | -62.34      | -60.72      |             |             | -58.44        | -50.12        | -7             | -43.12         |
| 6985MHz                         | Pass   | 8G              | 40G            | PK   | 39.701G      | 8.32        | -50.88      | -52.26      |             |             | -48.51        | -40.19        | -21.2          | -18.99         |
| 802.11ax HEW20_Nss1,(MCS0)_4TX  | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 5955MHz                         | Pass   | 8G              | 40G            | AV   | 11.908G      | 6.49        | -68.08      | -68.08      | -68.25      | -67.13      | -61.94        | -55.35        | -41.2          | -14.15         |
| 5955MHz                         | Pass   | 8G              | 40G            | AV   | 39.876G      | 6.49        | -57.35      | -58.91      | -57.46      | -57.46      | -51.73        | -45.24        | -41.2          | -4.04          |
| 5955MHz                         | Pass   | 8G              | 40G            | PK   | 11.913G      | 6.49        | -63.44      | -64.59      | -63.34      | -61.92      | -57.2         | -50.71        | -21.2          | -29.51         |
| 5955MHz                         | Pass   | 8G              | 40G            | PK   | 39.807G      | 6.49        | -54.69      | -52.81      | -54.95      | -50.6       | -46.87        | -40.38        | -21.2          | -19.18         |
| 6175MHz                         | Pass   | 8G              | 40G            | AV   | 12.341G      | 6.49        | -69.15      | -67.32      | -67.78      | -69.15      | -62.25        | -55.76        | -41.2          | -14.56         |
| 6175MHz                         | Pass   | 8G              | 40G            | AV   | 39.82G       | 6.49        | -58.41      | -58.03      | -57.79      | -56.24      | -51.51        | -45.02        | -41.2          | -3.82          |
| 6175MHz                         | Pass   | 8G              | 40G            | PK   | 12.357G      | 6.49        | -63.16      | -66.92      | -67.06      | -60.68      | -57.6         | -51.11        | -21.2          | -29.91         |
| 6175MHz                         | Pass   | 8G              | 40G            | PK   | 39.834G      | 6.49        | -51.89      | -53.85      | -52.51      | -53.48      | -46.84        | -40.35        | -21.2          | -19.15         |
| 6415MHz                         | Pass   | 8G              | 40G            | AV   | 12.841G      | 6.49        | -68.63      | -70.02      | -69.3       | -68.47      | -63.04        | -56.55        | -27            | -29.55         |
| 6415MHz                         | Pass   | 8G              | 40G            | AV   | 39.848G      | 6.49        | -57.13      | -57.71      | -57.95      | -57.71      | -51.59        | -45.10        | -41.2          | -3.90          |
| 6415MHz                         | Pass   | 8G              | 40G            | PK   | 12.846G      | 6.49        | -62.7       | -64.6       | -66.27      | -62.46      | -57.73        | -51.24        | -7             | -44.24         |
| 6415MHz                         | Pass   | 8G              | 40G            | PK   | 39.808G      | 6.49        | -51.37      | -51.37      | -52.81      | -54.12      | -46.25        | -39.76        | -21.2          | -18.56         |
| 6435MHz                         | Pass   | 8G              | 40G            | AV   | 12.886G      | 7.31        | -68.24      | -69.07      | -69.07      | -68.4       | -62.66        | -55.35        | -27            | -28.35         |
| 6435MHz                         | Pass   | 8G              | 40G            | AV   | 39.844G      | 7.31        | -58.19      | -57.13      | -57.82      | -57.95      | -51.73        | -44.42        | -41.2          | -3.22          |
| 6435MHz                         | Pass   | 8G              | 40G            | PK   | 12.884G      | 7.31        | -63.82      | -65.59      | -63.54      | -61.73      | -57.44        | -50.13        | -7             | -43.13         |
| 6435MHz                         | Pass   | 8G              | 40G            | PK   | 39.826G      | 7.31        | -51.81      | -51.34      | -54.15      | -52.31      | -46.26        | -38.95        | -21.2          | -17.75         |
| 6475MHz                         | Pass   | 8G              | 40G            | AV   | 12.962G      | 7.31        | -68.32      | -68.83      | -68.16      | -69.01      | -62.55        | -55.24        | -27            | -28.24         |
| 6475MHz                         | Pass   | 8G              | 40G            | AV   | 39.809G      | 7.31        | -58.14      | -56.75      | -58.14      | -57.42      | -51.55        | -44.24        | -41.2          | -3.04          |
| 6475MHz                         | Pass   | 8G              | 40G            | PK   | 12.961G      | 7.31        | -62.95      | -62.6       | -64.48      | -65.02      | -57.63        | -50.32        | -7             | -43.32         |
| 6475MHz                         | Pass   | 8G              | 40G            | PK   | 39.767G      | 7.31        | -49.77      | -53.45      | -52.64      | -53.88      | -46.09        | -38.78        | -21.2          | -17.58         |
| 6515MHz                         | Pass   | 8G              | 40G            | AV   | 13.032G      | 7.31        | -68.94      | -67.53      | -67.53      | -68.78      | -62.12        | -54.81        | -27            | -27.81         |
| 6515MHz                         | Pass   | 8G              | 40G            | AV   | 39.809G      | 7.31        | -57.77      | -56.85      | -58.27      | -57.07      | -51.43        | -44.12        | -41.2          | -2.92          |
| 6515MHz                         | Pass   | 8G              | 40G            | PK   | 13.042G      | 7.31        | -61.51      | -65.48      | -63.01      | -64.61      | -57.36        | -50.05        | -7             | -43.05         |
| 6515MHz                         | Pass   | 8G              | 40G            | PK   | 39.772G      | 7.31        | -52.53      | -55.38      | -53.91      | -51.23      | -46.97        | -39.66        | -21.2          | -18.46         |
| 6535MHz                         | Pass   | 8G              | 40G            | AV   | 13.069G      | 7.65        | -68.02      | -67.72      | -68.33      | -68.18      | -62.04        | -54.39        | -27            | -27.39         |
| 6535MHz                         | Pass   | 8G              | 40G            | AV   | 39.838G      | 7.65        | -57.58      | -57.23      | -58.44      | -57.34      | -51.6         | -43.95        | -41.2          | -2.75          |
| 6535MHz                         | Pass   | 8G              | 40G            | PK   | 13.083G      | 7.65        | -61.74      | -62.83      | -65.64      | -64.36      | -57.37        | -49.72        | -7             | -42.72         |
| 6535MHz                         | Pass   | 8G              | 40G            | PK   | 39.803G      | 7.65        | -52.21      | -54.12      | -53.58      | -51.54      | -46.72        | -39.07        | -21.2          | -17.87         |
| 6695MHz                         | Pass   | 8G              | 40G            | AV   | 13.382G      | 7.65        | -66.84      | -67.27      | -67.57      | -68.21      | -61.42        | -53.77        | -41.2          | -12.57         |
| 6695MHz                         | Pass   | 8G              | 40G            | AV   | 39.801G      | 7.65        | -58.13      | -56.63      | -58.38      | -57.88      | -51.68        | -44.03        | -41.2          | -2.83          |
| 6695MHz                         | Pass   | 8G              | 40G            | PK   | 13.372G      | 7.65        | -64.1       | -65.64      | -60.12      | -62.87      | -56.67        | -49.02        | -21.2          | -27.82         |
| 6695MHz                         | Pass   | 8G              | 40G            | PK   | 39.671G      | 7.65        | -53.07      | -53.26      | -50.7       | -53.14      | -46.38        | -38.73        | -21.2          | -17.53         |
| 6855MHz                         | Pass   | 8G              | 40G            | AV   | 13.71G       | 7.65        | -68.44      | -67.68      | -68.13      | -67.83      | -61.99        | -54.34        | -27            | -27.34         |
| 6855MHz                         | Pass   | 8G              | 40G            | AV   | 39.818G      | 7.65        | -58.03      | -58.15      | -56.98      | -56.98      | -51.48        | -43.83        | -41.2          | -2.63          |
| 6855MHz                         | Pass   | 8G              | 40G            | PK   | 13.711G      | 7.65        | -61.71      | -63.74      | -61.08      | -66.14      | -56.74        | -49.09        | -7             | -42.09         |
| 6855MHz                         | Pass   | 8G              | 40G            | PK   | 39.797G      | 7.65        | -51.11      | -53.17      | -53.91      | -49.81      | -45.67        | -38.02        | -21.2          | -16.82         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 13.748G      | 7.65        | -67.93      | -67.93      | -68.08      | -68.68      | -62.12        | -54.47        | -27            | -27.47         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 39.848G      | 7.65        | -57.95      | -57.83      | -58.33      | -56.91      | -51.7         | -44.05        | -41.2          | -2.85          |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 13.763G      | 7.65        | -66.47      | -61.68      | -61.27      | -66.84      | -57.31        | -49.66        | -7             | -42.66         |
| 6875MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 39.842G      | 7.65        | -51.54      | -52.33      | -54.26      | -52.4       | -46.5         | -38.85        | -21.2          | -17.65         |
| 6895MHz                         | Pass   | 8G              | 40G            | AV   | 13.808G      | 8.32        | -68.22      | -68.38      | -67.49      | -67.92      | -61.97        | -53.65        | -27            | -26.65         |
| 6895MHz                         | Pass   | 8G              | 40G            | AV   | 39.801G      | 8.32        | -57.64      | -57.64      | -57.4       | -57.64      | -51.56        | -43.24        | -41.2          | -2.04          |
| 6895MHz                         | Pass   | 8G              | 40G            | PK   | 13.775G      | 8.32        | -64.97      | -63.3       | -62.81      | -63.82      | -57.63        | -49.31        | -7             | -42.31         |
| 6895MHz                         | Pass   | 8G              | 40G            | PK   | 39.905G      | 8.32        | -55.25      | -52.75      | -51.32      | -51.43      | -46.41        | -38.09        | -21.2          | -16.89         |
| 6995MHz                         | Pass   | 8G              | 40G            | AV   | 13.997G      | 8.32        | -68.5       | -67.24      | -68.68      | -67.54      | -61.93        | -53.61        | -27            | -26.61         |
| 6995MHz                         | Pass   | 8G              | 40G            | AV   | 39.807G      | 8.32        | -57.65      | -57.41      | -56.53      | -58.39      | -51.42        | -43.10        | -41.2          | -1.90          |
| 6995MHz                         | Pass   | 8G              | 40G            | PK   | 13.979G      | 8.32        | -63.4       | -65.04      | -60.23      | -62.77      | -56.48        | -48.16        | -7             | -41.16         |
| 6995MHz                         | Pass   | 8G              | 40G            | PK   | 39.87G       | 8.32        | -53.32      | -53.75      | -52.4       | -51.92      | -46.77        | -38.45        | -21.2          | -17.25         |
| 7095MHz                         | Pass   | 8G              | 40G            | AV   | 14.207G      | 8.32        | -68.85      | -68.85      | -68.4       | -68.7       | -62.68        | -54.36        | -27            | -27.36         |
| 7095MHz                         | Pass   | 8G              | 40G            | AV   | 39.861G      | 8.32        | -57.05      | -58.09      | -57.27      | -57.5       | -51.44        | -43.12        | -41.2          | -1.92          |
| 7095MHz                         | Pass   | 8G              | 40G            | PK   | 14.18G       | 8.32        | -63.09      | -63.41      | -64.62      | -63.49      | -57.6         | -49.28        | -7             | -42.28         |
| 7095MHz                         | Pass   | 8G              | 40G            | PK   | 39.867G      | 8.32        | -49.79      | -52.55      | -53.57      | -54.56      | -46.21        | -37.89        | -21.2          | -16.69         |
| 802.11ax HEW40_Nss1,(MCS0)_4TX  | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 5965MHz                         | Pass   | 8G              | 40G            | AV   | 11.965G      | 6.49        | -67.72      | -68.05      | -68.05      | -68.4       | -62.03        | -55.54        | -41.2          | -14.34         |
| 5965MHz                         | Pass   | 8G              | 40G            | AV   | 39.857G      | 6.49        | -57.11      | -58.29      | -57.56      | -57.8       | -51.65        | -45.16        | -41.2          | -3.96          |
| 5965MHz                         | Pass   | 8G              | 40G            | PK   | 11.955G      | 6.49        | -63.32      | -62.31      | -65.53      | -62.67      | -57.27        | -50.78        | -21.2          | -29.58         |
| 5965MHz                         | Pass   | 8G              | 40G            | PK   | 39.79G       | 6.49        | -52.82      | -53.24      | -50.48      | -54.61      | -46.5         | -40.01        | -21.2          | -18.81         |
| 6165MHz                         | Pass   | 8G              | 40G            | AV   | 12.32G       | 6.49        | -66.83      | -67.57      | -67.73      | -67.89      | -61.46        | -54.97        | -41.2          | -13.77         |
| 6165MHz                         | Pass   | 8G              | 40G            | AV   | 39.822G      | 6.49        | -57.09      | -57.21      | -57.32      | -58.55      | -51.48        | -44.99        | -41.2          | -3.79          |



**CSE (High Pass Filter)\_Radio 2-1T1S, 2T1S, 4T1S**  
**For other test frequencies (Harmonic 8GHz ~ 40GHz)**

**Appendix E.4**

| Mode                            | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | Freq<br>(Hz) | DG<br>(dBi) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) | P4<br>(dBm) | Psum<br>(dBm) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------|--------|-----------------|----------------|------|--------------|-------------|-------------|-------------|-------------|-------------|---------------|---------------|----------------|----------------|
| 6165MHz                         | Pass   | 8G              | 40G            | PK   | 12.314G      | 6.49        | -63.57      | -62.47      | -61.73      | -61.97      | -56.36        | -49.87        | -21.2          | -28.67         |
| 6165MHz                         | Pass   | 8G              | 40G            | PK   | 39.847G      | 6.49        | -53.14      | -52.47      | -52.8       | -51.49      | -46.41        | -39.92        | -21.2          | -18.72         |
| 6405MHz                         | Pass   | 8G              | 40G            | AV   | 12.827G      | 6.49        | -69.91      | -68.23      | -68.39      | -69.55      | -62.94        | -56.45        | -27            | -29.45         |
| 6405MHz                         | Pass   | 8G              | 40G            | AV   | 39.839G      | 6.49        | -58.44      | -56.17      | -57.82      | -57.7       | -51.43        | -44.94        | -41.2          | -3.74          |
| 6405MHz                         | Pass   | 8G              | 40G            | PK   | 12.814G      | 6.49        | -64.56      | -64.86      | -62.47      | -64.76      | -58.02        | -51.53        | -7             | -44.53         |
| 6405MHz                         | Pass   | 8G              | 40G            | PK   | 39.851G      | 6.49        | -53.3       | -52.17      | -51.98      | -53.3       | -46.62        | -40.13        | -21.2          | -18.93         |
| 6445MHz                         | Pass   | 8G              | 40G            | AV   | 12.908G      | 7.31        | -67.86      | -68.66      | -69.18      | -69.92      | -62.82        | -55.51        | -27            | -28.51         |
| 6445MHz                         | Pass   | 8G              | 40G            | AV   | 39.837G      | 7.31        | -58.97      | -56.17      | -58.18      | -57.58      | -51.58        | -44.27        | -41.2          | -3.07          |
| 6445MHz                         | Pass   | 8G              | 40G            | PK   | 12.859G      | 7.31        | -63.4       | -64.84      | -62.16      | -65.38      | -57.74        | -50.43        | -7             | -43.43         |
| 6445MHz                         | Pass   | 8G              | 40G            | PK   | 39.775G      | 7.31        | -49.51      | -55.17      | -52.13      | -54.35      | -46.19        | -38.88        | -21.2          | -17.68         |
| 6485MHz                         | Pass   | 8G              | 40G            | AV   | 12.983G      | 7.31        | -68.35      | -67.69      | -68.52      | -67.85      | -62.07        | -54.76        | -27            | -27.76         |
| 6485MHz                         | Pass   | 8G              | 40G            | AV   | 39.809G      | 7.31        | -57.89      | -57.42      | -56.75      | -58.14      | -51.5         | -44.19        | -41.2          | -2.99          |
| 6485MHz                         | Pass   | 8G              | 40G            | PK   | 12.997G      | 7.31        | -61.74      | -63.34      | -65.94      | -63.15      | -57.28        | -49.97        | -7             | -42.97         |
| 6485MHz                         | Pass   | 8G              | 40G            | PK   | 39.841G      | 7.31        | -51.66      | -53.94      | -51.03      | -54.41      | -46.5         | -39.19        | -21.2          | -17.99         |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 13.043G      | 7.31        | -68.9       | -66.8       | -68.57      | -67.64      | -61.88        | -54.57        | -27            | -27.57         |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 39.803G      | 7.31        | -58.39      | -57.41      | -57.07      | -57.41      | -51.52        | -44.21        | -41.2          | -3.01          |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 13.081G      | 7.31        | -62.34      | -61.17      | -64.76      | -65.4       | -57.06        | -49.75        | -7             | -42.75         |
| 6525MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 39.805G      | 7.31        | -53.22      | -51.6       | -55.21      | -51.84      | -46.73        | -39.42        | -21.2          | -18.22         |
| 6565MHz                         | Pass   | 8G              | 40G            | AV   | 13.133G      | 7.65        | -67.51      | -67.51      | -68.69      | -68.08      | -61.9         | -54.25        | -27            | -27.25         |
| 6565MHz                         | Pass   | 8G              | 40G            | AV   | 39.812G      | 7.65        | -58.53      | -57.77      | -58.02      | -55.46      | -51.25        | -43.60        | -41.2          | -2.40          |
| 6565MHz                         | Pass   | 8G              | 40G            | PK   | 13.099G      | 7.65        | -62.59      | -63.43      | -65.28      | -61.4       | -56.93        | -49.28        | -7             | -42.28         |
| 6565MHz                         | Pass   | 8G              | 40G            | PK   | 39.85G       | 7.65        | -52.22      | -52.74      | -53.43      | -51.38      | -46.36        | -38.71        | -21.2          | -17.51         |
| 6685MHz                         | Pass   | 8G              | 40G            | AV   | 13.395G      | 7.65        | -65.84      | -68.64      | -68.3       | -68.13      | -61.55        | -53.90        | -41.2          | -12.70         |
| 6685MHz                         | Pass   | 8G              | 40G            | AV   | 39.838G      | 7.65        | -58.44      | -56.48      | -57.69      | -57.94      | -51.56        | -43.91        | -41.2          | -2.71          |
| 6685MHz                         | Pass   | 8G              | 40G            | PK   | 13.391G      | 7.65        | -61.16      | -63.12      | -63.79      | -62.94      | -56.62        | -48.97        | -21.2          | -27.77         |
| 6685MHz                         | Pass   | 8G              | 40G            | PK   | 39.817G      | 7.65        | -53.53      | -51.74      | -51.1       | -53.6       | -46.33        | -38.68        | -21.2          | -17.48         |
| 6845MHz                         | Pass   | 8G              | 40G            | AV   | 13.711G      | 7.65        | -68.61      | -67.55      | -67         | -68.14      | -61.76        | -54.11        | -27            | -27.11         |
| 6845MHz                         | Pass   | 8G              | 40G            | AV   | 39.853G      | 7.65        | -56.64      | -58.24      | -57.75      | -58.37      | -51.67        | -44.02        | -41.2          | -2.82          |
| 6845MHz                         | Pass   | 8G              | 40G            | PK   | 13.663G      | 7.65        | -62.3       | -62.97      | -62.22      | -63.78      | -56.75        | -49.10        | -7             | -42.10         |
| 6845MHz                         | Pass   | 8G              | 40G            | PK   | 39.814G      | 7.65        | -50.82      | -52.1       | -52.16      | -54.7       | -46.21        | -38.56        | -21.2          | -17.36         |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 13.779G      | 7.65        | -69.18      | -67.25      | -68.7       | -68.39      | -62.3         | -54.65        | -27            | -27.65         |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 39.851G      | 7.65        | -57.26      | -56.93      | -58.47      | -57.73      | -51.54        | -43.89        | -41.2          | -2.69          |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 13.791G      | 7.65        | -62.12      | -65.64      | -61.13      | -64.69      | -57           | -49.35        | -7             | -42.35         |
| 6885MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 39.797G      | 7.65        | -53.6       | -53.03      | -51.62      | -53.03      | -46.74        | -39.09        | -21.2          | -17.89         |
| 6925MHz                         | Pass   | 8G              | 40G            | AV   | 13.824G      | 8.32        | -68.27      | -67.11      | -68.27      | -68.58      | -62           | -53.68        | -27            | -26.68         |
| 6925MHz                         | Pass   | 8G              | 40G            | AV   | 39.844G      | 8.32        | -57.02      | -58.32      | -57.47      | -58.45      | -51.75        | -43.43        | -41.2          | -2.23          |
| 6925MHz                         | Pass   | 8G              | 40G            | PK   | 13.831G      | 8.32        | -63.39      | -60.36      | -63.85      | -63.39      | -56.48        | -48.16        | -7             | -41.16         |
| 6925MHz                         | Pass   | 8G              | 40G            | PK   | 39.83G       | 8.32        | -51.7       | -54.08      | -53.7       | -51.24      | -46.49        | -38.17        | -21.2          | -16.97         |
| 7005MHz                         | Pass   | 8G              | 40G            | AV   | 14.021G      | 8.32        | -68.44      | -68.27      | -66.91      | -68.27      | -61.91        | -53.59        | -27            | -26.59         |
| 7005MHz                         | Pass   | 8G              | 40G            | AV   | 39.798G      | 8.32        | -58.14      | -56.33      | -58.4       | -57.66      | -51.54        | -43.22        | -41.2          | -2.02          |
| 7005MHz                         | Pass   | 8G              | 40G            | PK   | 14.017G      | 8.32        | -63.31      | -61.19      | -64.82      | -62.86      | -56.83        | -48.51        | -7             | -41.51         |
| 7005MHz                         | Pass   | 8G              | 40G            | PK   | 39.831G      | 8.32        | -52.06      | -51.88      | -54.48      | -51.07      | -46.18        | -37.86        | -21.2          | -16.66         |
| 7085MHz                         | Pass   | 8G              | 40G            | AV   | 14.136G      | 8.32        | -68.64      | -69.26      | -69.59      | -69.1       | -63.11        | -54.79        | -27            | -27.79         |
| 7085MHz                         | Pass   | 8G              | 40G            | AV   | 39.794G      | 8.32        | -57.93      | -57.46      | -58.31      | -57.69      | -51.82        | -43.50        | -41.2          | -2.30          |
| 7085MHz                         | Pass   | 8G              | 40G            | PK   | 14.153G      | 8.32        | -64.08      | -66.01      | -63.17      | -63.57      | -58.06        | -49.74        | -7             | -42.74         |
| 7085MHz                         | Pass   | 8G              | 40G            | PK   | 39.869G      | 8.32        | -53.67      | -53.89      | -51.79      | -51.73      | -46.63        | -38.31        | -21.2          | -17.11         |
| 802.11ax HEW80_Nss1,(MCS0)_4TX  | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 5985MHz                         | Pass   | 8G              | 40G            | AV   | 12.038G      | 6.49        | -66.21      | -66.97      | -67.62      | -67.79      | -61.08        | -54.59        | -41.2          | -13.39         |
| 5985MHz                         | Pass   | 8G              | 40G            | AV   | 39.843G      | 6.49        | -57.82      | -57.35      | -58.19      | -56.48      | -51.39        | -44.90        | -41.2          | -3.70          |
| 5985MHz                         | Pass   | 8G              | 40G            | PK   | 12.042G      | 6.49        | -63.1       | -63.2       | -64.06      | -59.72      | -56.15        | -49.66        | -21.2          | -28.46         |
| 5985MHz                         | Pass   | 8G              | 40G            | PK   | 39.714G      | 6.49        | -53.05      | -52.15      | -51.53      | -53.05      | -46.38        | -39.89        | -21.2          | -18.69         |
| 6145MHz                         | Pass   | 8G              | 40G            | AV   | 12.279G      | 6.49        | -67.93      | -67.77      | -69.17      | -69.14      | -61.93        | -55.44        | -41.2          | -14.24         |
| 6145MHz                         | Pass   | 8G              | 40G            | AV   | 39.848G      | 6.49        | -58.59      | -56.81      | -57.36      | -57.25      | -51.43        | -44.94        | -41.2          | -3.74          |
| 6145MHz                         | Pass   | 8G              | 40G            | PK   | 12.334G      | 6.49        | -59.87      | -66.35      | -65.22      | -61.17      | -56.33        | -49.84        | -21.2          | -28.64         |
| 6145MHz                         | Pass   | 8G              | 40G            | PK   | 39.826G      | 6.49        | -53.84      | -53.47      | -52.37      | -51.29      | -46.6         | -40.11        | -21.2          | -18.91         |
| 6385MHz                         | Pass   | 8G              | 40G            | AV   | 12.7G        | 6.49        | -68.72      | -69.25      | -69.07      | -68.21      | -62.77        | -56.28        | -41.2          | -15.08         |
| 6385MHz                         | Pass   | 8G              | 40G            | AV   | 39.844G      | 6.49        | -58.45      | -57.13      | -56.91      | -57.82      | -51.52        | -45.03        | -41.2          | -3.83          |
| 6385MHz                         | Pass   | 8G              | 40G            | PK   | 12.698G      | 6.49        | -64.13      | -63.73      | -62.81      | -65.33      | -57.89        | -51.40        | -21.2          | -30.20         |
| 6385MHz                         | Pass   | 8G              | 40G            | PK   | 39.802G      | 6.49        | -52.02      | -51.08      | -50.65      | -52.94      | -45.56        | -39.07        | -21.2          | -17.87         |
| 6465MHz                         | Pass   | 8G              | 40G            | AV   | 12.994G      | 7.31        | -67.85      | -68.02      | -68.02      | -68.02      | -61.96        | -54.65        | -27            | -27.65         |
| 6465MHz                         | Pass   | 8G              | 40G            | AV   | 39.807G      | 7.31        | -58.26      | -57.65      | -56.53      | -58.14      | -51.57        | -44.26        | -41.2          | -3.06          |
| 6465MHz                         | Pass   | 8G              | 40G            | PK   | 12.996G      | 7.31        | -62.17      | -63.65      | -61.76      | -65.08      | -56.96        | -49.65        | -7             | -42.65         |
| 6465MHz                         | Pass   | 8G              | 40G            | PK   | 39.79G       | 7.31        | -53.09      | -52.62      | -52.89      | -51.45      | -46.44        | -39.13        | -21.2          | -17.93         |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 13.144G      | 7.31        | -68.6       | -68.44      | -67.3       | -68.29      | -62.11        | -54.80        | -27            | -27.80         |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | AV   | 39.814G      | 7.31        | -58.15      | -56.75      | -57.19      | -58.53      | -51.58        | -44.27        | -41.2          | -3.07          |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 13.146G      | 7.31        | -64.05      | -62.25      | -61.95      | -63.35      | -56.8         | -49.49        | -7             | -42.49         |
| 6545MHz Straddle 6.425-6.525GHz | Pass   | 8G              | 40G            | PK   | 39.614G      | 7.31        | -51.23      | -51.03      | -55.33      | -53.82      | -46.48        | -39.17        | -21.2          | -17.97         |
| 6625MHz                         | Pass   | 8G              | 40G            | AV   | 13.302G      | 7.65        | -67.79      | -68.1       | -66.76      | -68.27      | -61.67        | -54.02        | -41.2          | -12.82         |
| 6625MHz                         | Pass   | 8G              | 40G            | AV   | 39.796G      | 7.65        | -58.42      | -58.16      | -56.25      | -58.16      | -51.63        | -43.98        | -41.2          | -2.78          |
| 6625MHz                         | Pass   | 8G              | 40G            | PK   | 13.257G      | 7.65        | -61.46      | -63.56      | -64.03      | -63.65      | -57.03        | -49.38        | -21.2          | -28.18         |



**CSE (High Pass Filter)\_Radio 2-1T1S, 2T1S, 4T1S**  
**For other test frequencies (Harmonic 8GHz ~ 40GHz)**

**Appendix E.4**

| Mode                            | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | Type | Freq<br>(Hz) | DG<br>(dBi) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) | P4<br>(dBm) | Psum<br>(dBm) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------|--------|-----------------|----------------|------|--------------|-------------|-------------|-------------|-------------|-------------|---------------|---------------|----------------|----------------|
| 6625MHz                         | Pass   | 8G              | 40G            | PK   | 39.77G       | 7.65        | -52.74      | -52.94      | -50.71      | -53.71      | -46.35        | -38.70        | -21.2          | -17.50         |
| 6705MHz                         | Pass   | 8G              | 40G            | AV   | 13.384G      | 7.65        | -68.7       | -67.41      | -66.97      | -67.72      | -61.63        | -53.98        | -41.2          | -12.78         |
| 6705MHz                         | Pass   | 8G              | 40G            | AV   | 39.794G      | 7.65        | -57.01      | -56.68      | -58.31      | -58.7       | -51.57        | -43.92        | -41.2          | -2.72          |
| 6705MHz                         | Pass   | 8G              | 40G            | PK   | 13.365G      | 7.65        | -64.04      | -62.16      | -60.96      | -63.94      | -56.56        | -48.91        | -21.2          | -27.71         |
| 6705MHz                         | Pass   | 8G              | 40G            | PK   | 39.823G      | 7.65        | -54.8       | -55.42      | -52.97      | -49.87      | -46.67        | -39.02        | -21.2          | -17.82         |
| 6785MHz                         | Pass   | 8G              | 40G            | AV   | 13.629G      | 7.65        | -68.39      | -67.92      | -67.77      | -67.33      | -61.82        | -54.17        | -27            | -27.17         |
| 6785MHz                         | Pass   | 8G              | 40G            | AV   | 39.832G      | 7.65        | -57.57      | -57.69      | -58.05      | -57         | -51.54        | -43.89        | -41.2          | -2.69          |
| 6785MHz                         | Pass   | 8G              | 40G            | PK   | 13.514G      | 7.65        | -65.99      | -61.77      | -63.31      | -61.41      | -56.76        | -49.11        | -7             | -42.11         |
| 6785MHz                         | Pass   | 8G              | 40G            | PK   | 39.883G      | 7.65        | -50.56      | -52.75      | -53.91      | -52.56      | -46.25        | -38.60        | -21.2          | -17.40         |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 13.692G      | 7.65        | -68.79      | -66.98      | -67.54      | -67.84      | -61.72        | -54.07        | -27            | -27.07         |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | AV   | 39.828G      | 7.65        | -57.68      | -57.56      | -58.3       | -56.99      | -51.59        | -43.94        | -41.2          | -2.74          |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 13.61G       | 7.65        | -62.14      | -62.3       | -61.61      | -64.26      | -56.45        | -48.80        | -7             | -41.80         |
| 6865MHz Straddle 6.525-6.875GHz | Pass   | 8G              | 40G            | PK   | 39.076G      | 7.65        | -50.73      | -54.79      | -54.43      | -52.72      | -46.84        | -39.19        | -21.2          | -17.99         |
| 6945MHz                         | Pass   | 8G              | 40G            | AV   | 13.907G      | 8.32        | -68.8       | -68.97      | -66.65      | -66.79      | -61.65        | -53.33        | -27            | -26.33         |
| 6945MHz                         | Pass   | 8G              | 40G            | AV   | 39.849G      | 8.32        | -57.83      | -57.83      | -58.46      | -57.03      | -51.74        | -43.42        | -41.2          | -2.22          |
| 6945MHz                         | Pass   | 8G              | 40G            | PK   | 13.956G      | 8.32        | -62.79      | -63.6       | -60.27      | -64.39      | -56.45        | -48.13        | -7             | -41.13         |
| 6945MHz                         | Pass   | 8G              | 40G            | PK   | 39.866G      | 8.32        | -53.7       | -51.81      | -52.87      | -52.23      | -46.57        | -38.25        | -21.2          | -17.05         |
| 7025MHz                         | Pass   | 8G              | 40G            | AV   | 14.031G      | 8.32        | -67.39      | -68         | -67.24      | -69         | -61.83        | -53.51        | -27            | -26.51         |
| 7025MHz                         | Pass   | 8G              | 40G            | AV   | 39.848G      | 8.32        | -57.13      | -56.39      | -58.72      | -58.46      | -51.55        | -43.23        | -41.2          | -2.03          |
| 7025MHz                         | Pass   | 8G              | 40G            | PK   | 13.998G      | 8.32        | -62.86      | -63.13      | -62.86      | -62.77      | -56.88        | -48.56        | -7             | -41.56         |
| 7025MHz                         | Pass   | 8G              | 40G            | PK   | 39.817G      | 8.32        | -56.8       | -52.23      | -52.69      | -51.27      | -46.79        | -38.47        | -21.2          | -17.27         |
| 802.11ax HEW160_Nss1(MCS0)_4TX  | -      | -               | -              | -    | -            | -           | -           | -           | -           | -           | -             | -             | -              | -              |
| 6025MHz                         | Pass   | 8G              | 40G            | AV   | 12.048G      | 6.49        | -68.1       | -66.61      | -66.61      | -67.24      | -61.08        | -54.59        | -41.2          | -13.39         |
| 6025MHz                         | Pass   | 8G              | 40G            | AV   | 39.837G      | 6.49        | -55.97      | -58.44      | -57.34      | -59.11      | -51.53        | -45.04        | -41.2          | -3.84          |
| 6025MHz                         | Pass   | 8G              | 40G            | PK   | 12.092G      | 6.49        | -65.33      | -61.89      | -60.94      | -61.17      | -56           | -49.51        | -21.2          | -28.31         |
| 6025MHz                         | Pass   | 8G              | 40G            | PK   | 39.853G      | 6.49        | -50.39      | -54.3       | -52.45      | -54.88      | -46.62        | -40.13        | -21.2          | -18.93         |
| 6185MHz                         | Pass   | 8G              | 40G            | AV   | 12.308G      | 6.49        | -68.02      | -67.39      | -67.86      | -67.54      | -61.67        | -55.18        | -41.2          | -13.98         |
| 6185MHz                         | Pass   | 8G              | 40G            | AV   | 39.82G       | 6.49        | -58.28      | -57.91      | -55.75      | -58.54      | -51.45        | -44.96        | -41.2          | -3.76          |
| 6185MHz                         | Pass   | 8G              | 40G            | PK   | 12.303G      | 6.49        | -61.39      | -64.36      | -63.07      | -60.94      | -56.21        | -49.72        | -21.2          | -28.52         |
| 6185MHz                         | Pass   | 8G              | 40G            | PK   | 39.187G      | 6.49        | -53.68      | -54.87      | -52.4       | -51.1       | -46.77        | -40.28        | -21.2          | -19.08         |
| 6345MHz                         | Pass   | 8G              | 40G            | AV   | 12.647G      | 6.49        | -68.47      | -67.8       | -68.13      | -68.3       | -62.15        | -55.66        | -41.2          | -14.46         |
| 6345MHz                         | Pass   | 8G              | 40G            | AV   | 39.834G      | 6.49        | -57.23      | -57.69      | -56.79      | -58.3       | -51.45        | -44.96        | -41.2          | -3.76          |
| 6345MHz                         | Pass   | 8G              | 40G            | PK   | 12.617G      | 6.49        | -64.04      | -63.34      | -61.76      | -63.34      | -57.02        | -50.53        | -21.2          | -29.33         |
| 6345MHz                         | Pass   | 8G              | 40G            | PK   | 39.84G       | 6.49        | -54.02      | -54.17      | -49.66      | -53.49      | -46.37        | -39.88        | -21.2          | -18.68         |
| 6505MHz                         | Pass   | 8G              | 40G            | AV   | 13.143G      | 7.31        | -67.03      | -68.75      | -68.59      | -66.41      | -61.56        | -54.25        | -27            | -27.25         |
| 6505MHz                         | Pass   | 8G              | 40G            | AV   | 39.796G      | 7.31        | -57.67      | -56.99      | -58.04      | -58.29      | -51.7         | -44.39        | -41.2          | -3.19          |
| 6505MHz                         | Pass   | 8G              | 40G            | PK   | 13.152G      | 7.31        | -62.43      | -61.29      | -64.75      | -64.46      | -56.97        | -49.66        | -7             | -42.66         |
| 6505MHz                         | Pass   | 8G              | 40G            | PK   | 39.178G      | 7.31        | -53         | -49.1       | -53.63      | -55.12      | -46.07        | -38.76        | -21.2          | -17.56         |
| 6505MHz Straddle 6.525-6.875GHz |        |                 |                |      |              |             |             |             |             |             |               |               |                |                |
| 6665MHz                         | Pass   | 8G              | 40G            | AV   | 13.324G      | 7.65        | -67.4       | -66.42      | -68.01      | -68.49      | -61.49        | -53.84        | -41.2          | -12.64         |
| 6665MHz                         | Pass   | 8G              | 40G            | AV   | 39.805G      | 7.65        | -58.01      | -58.39      | -57.07      | -56.85      | -51.51        | -43.86        | -41.2          | -2.66          |
| 6665MHz                         | Pass   | 8G              | 40G            | PK   | 13.258G      | 7.65        | -61.89      | -61.74      | -64.83      | -61.38      | -56.25        | -48.60        | -21.2          | -27.40         |
| 6665MHz                         | Pass   | 8G              | 40G            | PK   | 39.868G      | 7.65        | -53.3       | -50.53      | -52.5       | -54.98      | -46.51        | -38.86        | -21.2          | -17.66         |
| 6825MHz                         | Pass   | 8G              | 40G            | AV   | 13.666G      | 7.65        | -66.63      | -67.76      | -68.54      | -67.91      | -61.63        | -53.98        | -27            | -26.98         |
| 6825MHz                         | Pass   | 8G              | 40G            | AV   | 39.797G      | 7.65        | -56.45      | -57.2       | -57.78      | -58.67      | -51.43        | -43.78        | -41.2          | -2.58          |
| 6825MHz                         | Pass   | 8G              | 40G            | PK   | 13.663G      | 7.65        | -64.36      | -64.57      | -60.45      | -61.25      | -56.26        | -48.61        | -7             | -41.61         |
| 6825MHz                         | Pass   | 8G              | 40G            | PK   | 39.811G      | 7.65        | -51.85      | -55.4       | -52.68      | -50.77      | -46.35        | -38.70        | -21.2          | -17.50         |
| 6825MHz Straddle 6.875-7.125GHz |        |                 |                |      |              |             |             |             |             |             |               |               |                |                |
| 6985MHz                         | Pass   | 8G              | 40G            | AV   | 14.031G      | 8.32        | -68.49      | -67.84      | -67.39      | -67.54      | -61.77        | -53.45        | -27            | -26.45         |
| 6985MHz                         | Pass   | 8G              | 40G            | AV   | 39.841G      | 8.32        | -58.84      | -58.57      | -57.82      | -55.79      | -51.56        | -43.24        | -41.2          | -2.04          |
| 6985MHz                         | Pass   | 8G              | 40G            | PK   | 13.879G      | 8.32        | -62.49      | -63.18      | -61.26      | -62.83      | -56.36        | -48.04        | -7             | -41.04         |
| 6985MHz                         | Pass   | 8G              | 40G            | PK   | 39.844G      | 8.32        | -50.3       | -51.96      | -56.42      | -53.21      | -46.43        | -38.11        | -21.2          | -16.91         |


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

5955MHz

01/03/2023

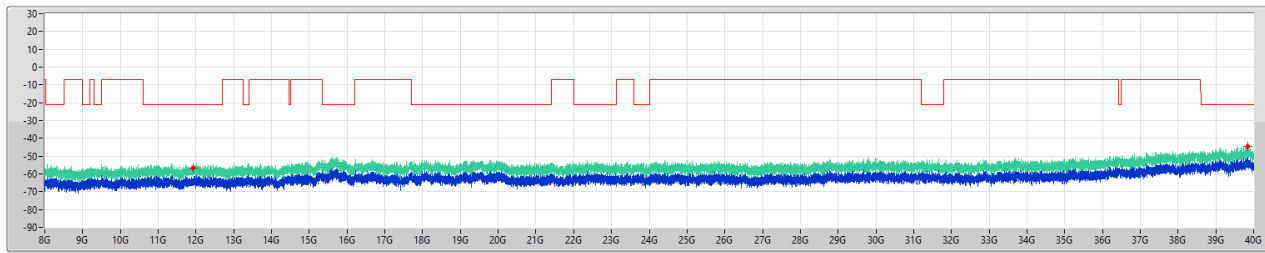


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 11.925G  | -56.58    | -21.20     | -35.38     | 6.00   | 0.00    | -62.58    | -62.58  |
| 8G          | 40G        | 1M      | PK   | 39.838G  | -44.60    | -21.20     | -23.40     | 6.00   | 0.00    | -50.60    | -50.60  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

5955MHz

01/03/2023

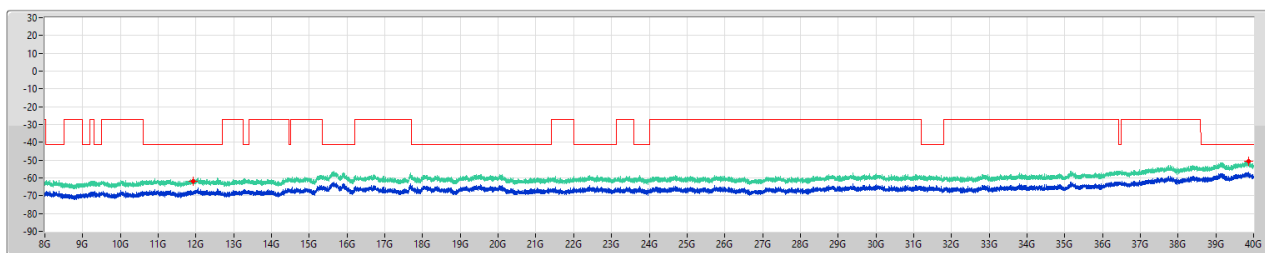


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 11.926G  | -61.88    | -41.20     | -20.68     | 6.00   | 0.00    | -67.88    | -67.88  |
| 8G          | 40G        | 1M      | AV   | 39.86G   | -50.72    | -41.20     | -9.52      | 6.00   | 0.00    | -56.72    | -56.72  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6175MHz

01/03/2023

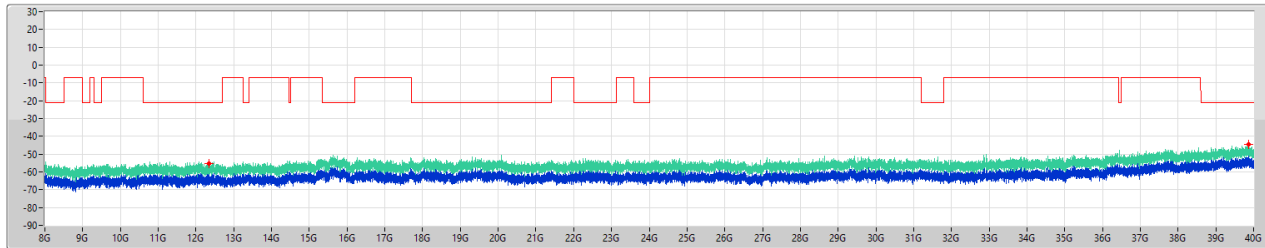


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.34G   | -55.18    | -21.20     | -33.98     | 6.00   | 0.00    | -61.18    | -61.18  |
| 8G          | 40G        | 1M      | PK   | 39.873G  | -44.34    | -21.20     | -23.14     | 6.00   | 0.00    | -50.34    | -50.34  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6175MHz

01/03/2023

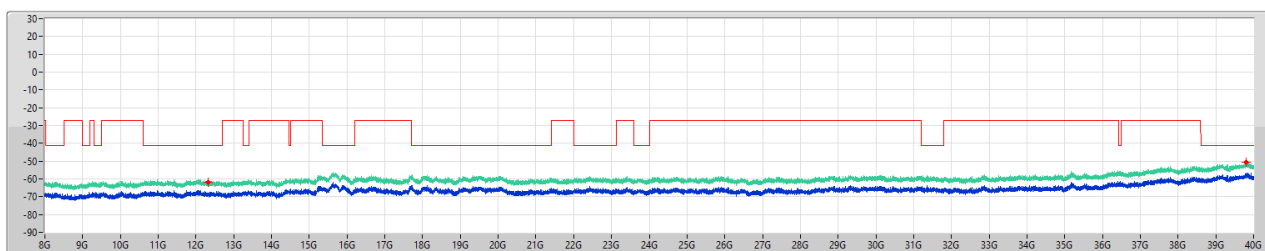


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.333G  | -61.76    | -41.20     | -20.56     | 6.00   | 0.00    | -67.76    | -67.76  |
| 8G          | 40G        | 1M      | AV   | 39.799G  | -50.85    | -41.20     | -9.65      | 6.00   | 0.00    | -56.85    | -56.85  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6415MHz

01/03/2023

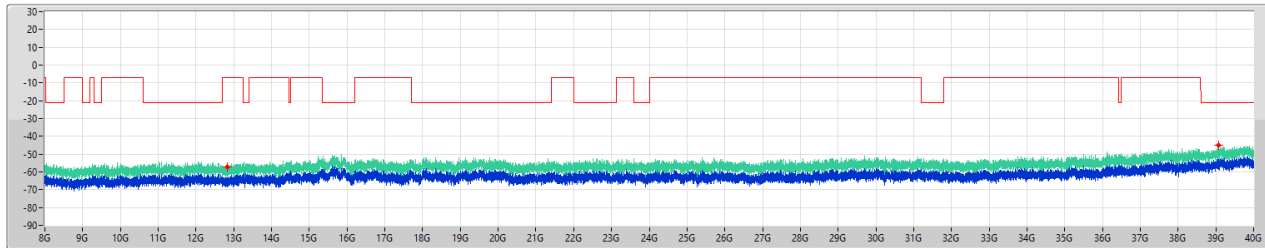


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.827G  | -57.30    | -7.00      | -50.30     | 6.00   | 0.00    | -63.30    | -63.30  |
| 8G          | 40G        | 1M      | PK   | 39.067G  | -44.87    | -21.20     | -23.67     | 6.00   | 0.00    | -50.87    | -50.87  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6415MHz

01/03/2023

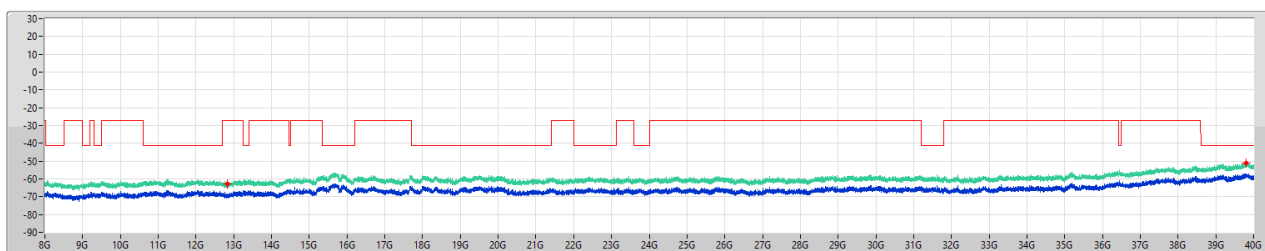


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.835G  | -62.66    | -27.00     | -35.66     | 6.00   | 0.00    | -68.66    | -68.66  |
| 8G          | 40G        | 1M      | AV   | 39.8G    | -51.17    | -41.20     | -9.97      | 6.00   | 0.00    | -57.17    | -57.17  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6435MHz

01/03/2023

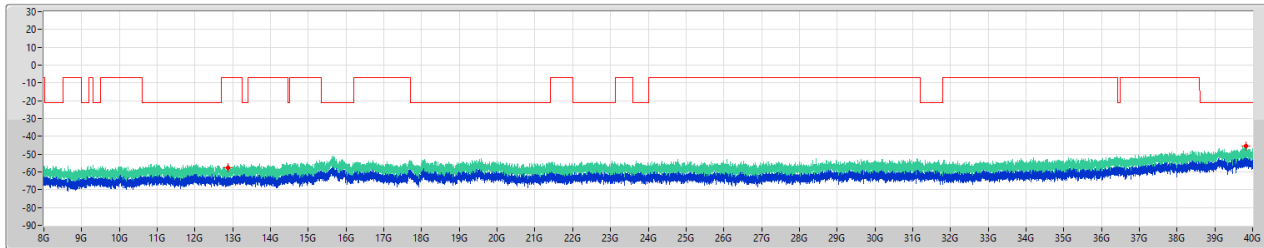


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.866G  | -57.73    | -7.00      | -50.73     | 4.87   | 0.00    | -62.60    | -62.60  |
| 8G          | 40G        | 1M      | PK   | 39.831G  | -45.56    | -21.20     | -24.36     | 4.87   | 0.00    | -50.43    | -50.43  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6435MHz

01/03/2023

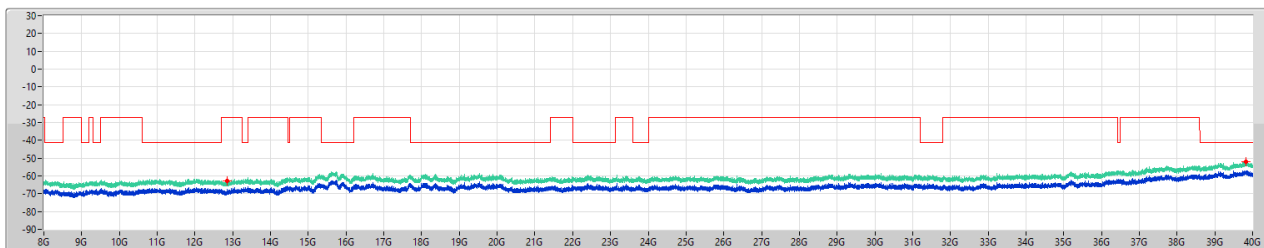


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.855G  | -62.78    | -27.00     | -35.78     | 4.87   | 0.00    | -67.65    | -67.65  |
| 8G          | 40G        | 1M      | AV   | 39.821G  | -52.11    | -41.20     | -10.91     | 4.87   | 0.00    | -56.98    | -56.98  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6475MHz

01/03/2023

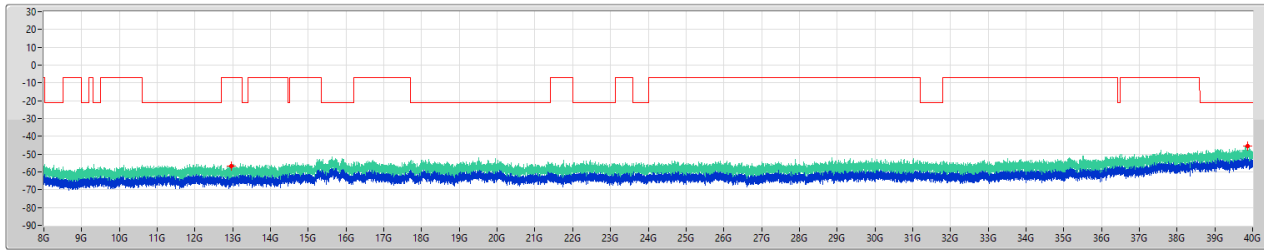


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.964G  | -56.51    | -7.00      | -49.51     | 4.87   | 0.00    | -61.38    | -61.38  |
| 8G          | 40G        | 1M      | PK   | 39.871G  | -45.25    | -21.20     | -24.05     | 4.87   | 0.00    | -50.12    | -50.12  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6475MHz

01/03/2023

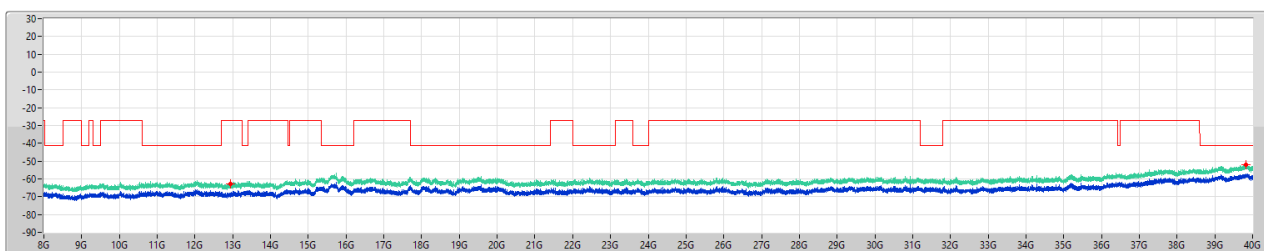


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.951G  | -62.98    | -27.00     | -35.98     | 4.87   | 0.00    | -67.85    | -67.85  |
| 8G          | 40G        | 1M      | AV   | 39.818G  | -52.22    | -41.20     | -11.02     | 4.87   | 0.00    | -57.09    | -57.09  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6515MHz

01/03/2023

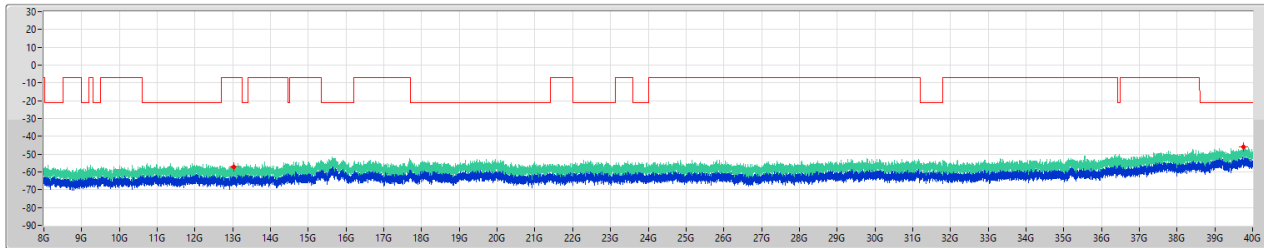


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.03G   | -57.06    | -7.00      | -50.06     | 4.87   | 0.00    | -61.93    | -61.93  |
| 8G          | 40G        | 1M      | PK   | 39.747G  | -45.75    | -21.20     | -24.55     | 4.87   | 0.00    | -50.62    | -50.62  |

6.425-6.525GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6515MHz

01/03/2023

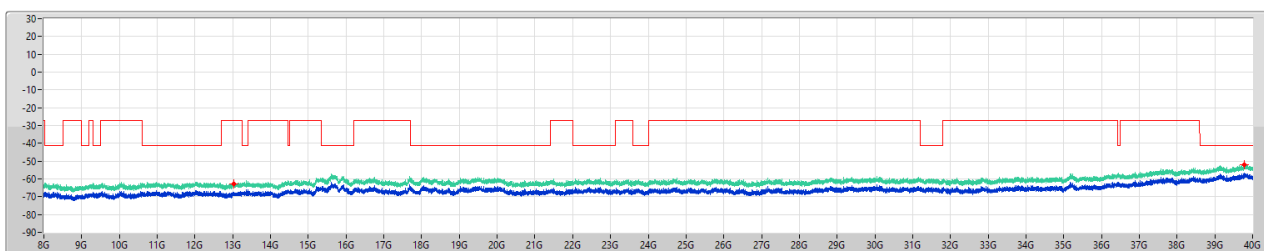


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.039G  | -62.64    | -27.00     | -35.64     | 4.87   | 0.00    | -67.51    | -67.51  |
| 8G          | 40G        | 1M      | AV   | 39.786G  | -51.89    | -41.20     | -10.69     | 4.87   | 0.00    | -56.76    | -56.76  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6535MHz

01/03/2023

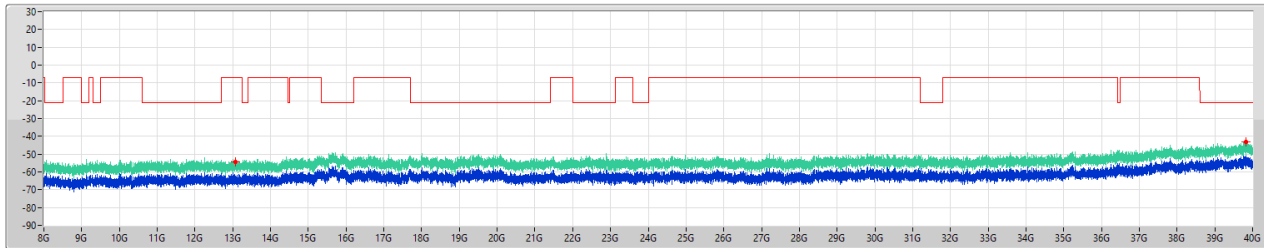


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.078G  | -54.51    | -7.00      | -47.51     | 7.65   | 0.00    | -62.16    | -62.16  |
| 8G          | 40G        | 1M      | PK   | 39.834G  | -43.31    | -21.20     | -22.11     | 7.65   | 0.00    | -50.96    | -50.96  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6535MHz

01/03/2023

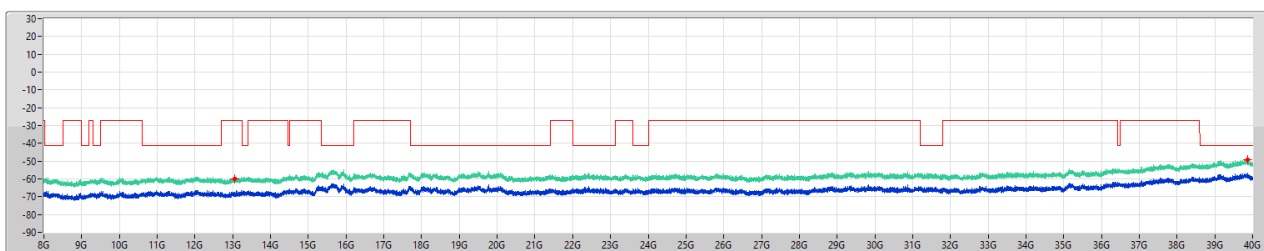


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.058G  | -60.16    | -27.00     | -33.16     | 7.65   | 0.00    | -67.81    | -67.81  |
| 8G          | 40G        | 1M      | AV   | 39.875G  | -49.15    | -41.20     | -7.95      | 7.65   | 0.00    | -56.80    | -56.80  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6695MHz

01/03/2023

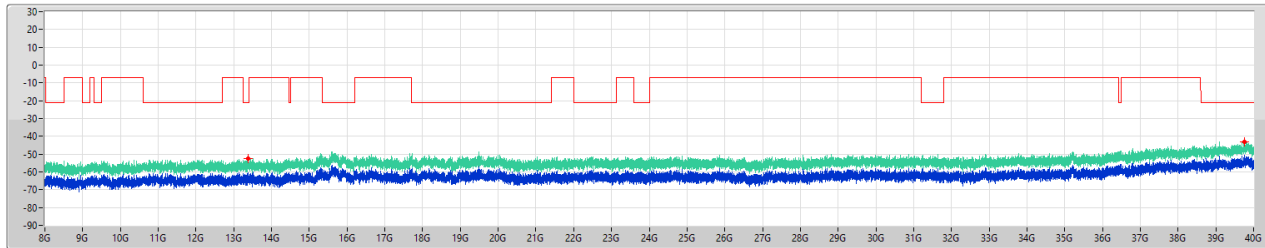


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.39G   | -52.69    | -21.20     | -31.49     | 7.65   | 0.00    | -60.34    | -60.34  |
| 8G          | 40G        | 1M      | PK   | 39.754G  | -43.11    | -21.20     | -21.91     | 7.65   | 0.00    | -50.76    | -50.76  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6695MHz

01/03/2023

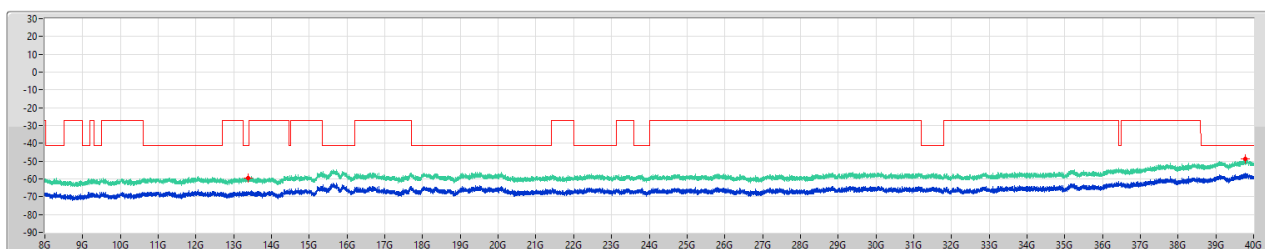


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.373G  | -59.39    | -41.20     | -18.19     | 7.65   | 0.00    | -67.04    | -67.04  |
| 8G          | 40G        | 1M      | AV   | 39.788G  | -48.98    | -41.20     | -7.78      | 7.65   | 0.00    | -56.63    | -56.63  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6855MHz

01/03/2023

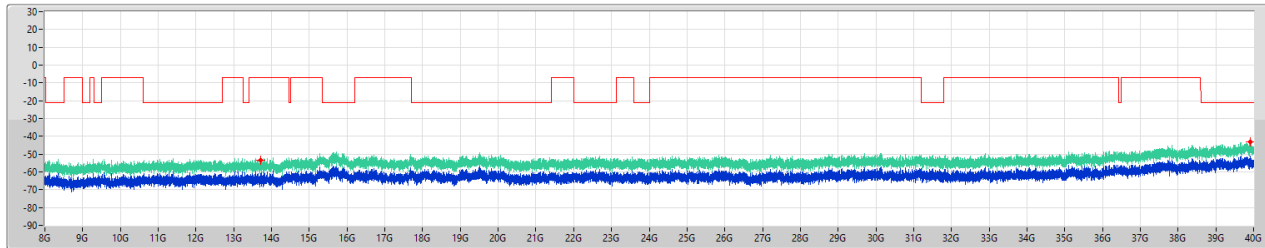

Limit:PK  
 EIRP:PK  
 Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.719G  | -53.45    | -7.00      | -46.45     | 7.65   | 0.00    | -61.10    | -61.10  |
| 8G          | 40G        | 1M      | PK   | 39.903G  | -43.25    | -21.20     | -22.05     | 7.65   | 0.00    | -50.90    | -50.90  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6855MHz

01/03/2023

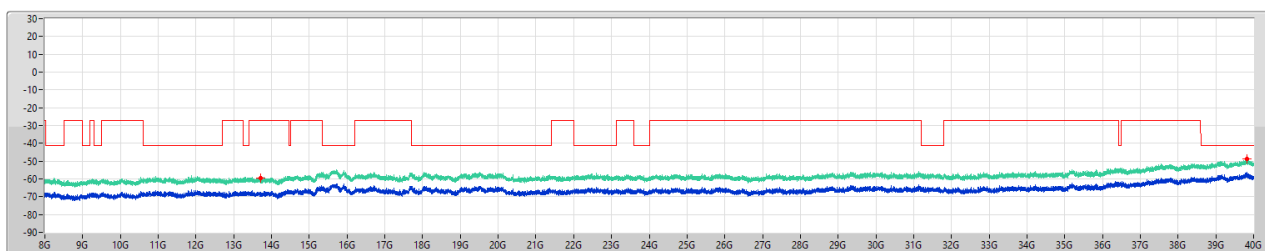

Limit:AV  
 EIRP:AV  
 Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.701G  | -59.65    | -27.00     | -32.65     | 7.65   | 0.00    | -67.30    | -67.30  |
| 8G          | 40G        | 1M      | AV   | 39.824G  | -48.80    | -41.20     | -7.60      | 7.65   | 0.00    | -56.45    | -56.45  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6875MHz Straddle 6.525-6.875GHz

01/03/2023

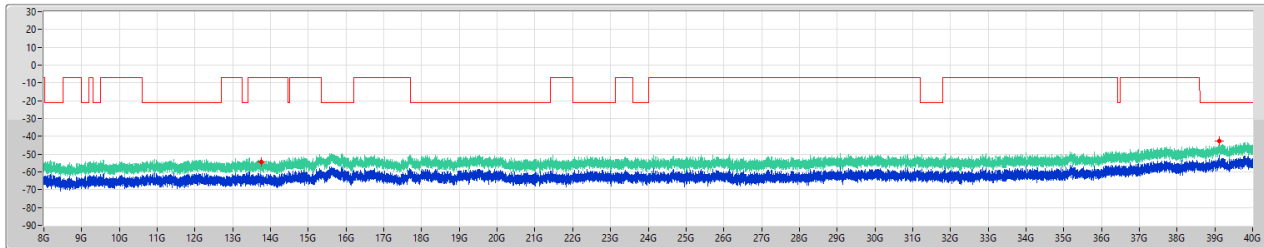

Limit:PK  
ERP:PK  
Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | ERP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.758G  | -54.27   | -7.00      | -47.27     | 7.65   | 0.00    | -61.92    | -61.92  |
| 8G          | 40G        | 1M      | PK   | 39.124G  | -42.82   | -21.20     | -21.62     | 7.65   | 0.00    | -50.47    | -50.47  |

6.525-6.875GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6875MHz Straddle 6.525-6.875GHz

01/03/2023

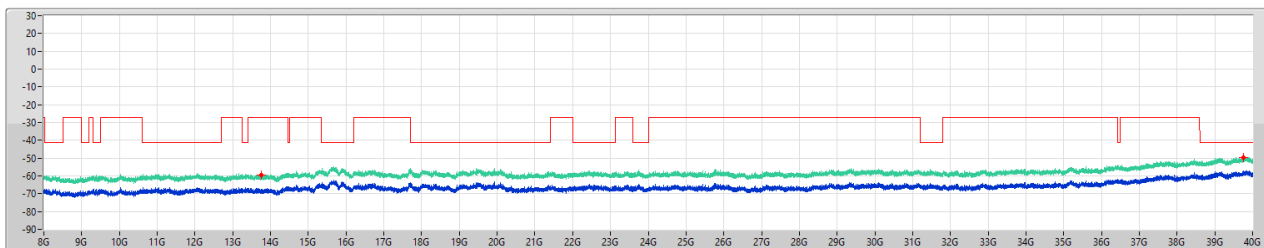

Limit:AV  
ERP:AV  
Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | ERP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.758G  | -59.70   | -27.00     | -32.70     | 7.65   | 0.00    | -67.35    | -67.35  |
| 8G          | 40G        | 1M      | AV   | 39.755G  | -49.50   | -41.20     | -8.30      | 7.65   | 0.00    | -57.15    | -57.15  |

6.875-7.125GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6895MHz

01/03/2023

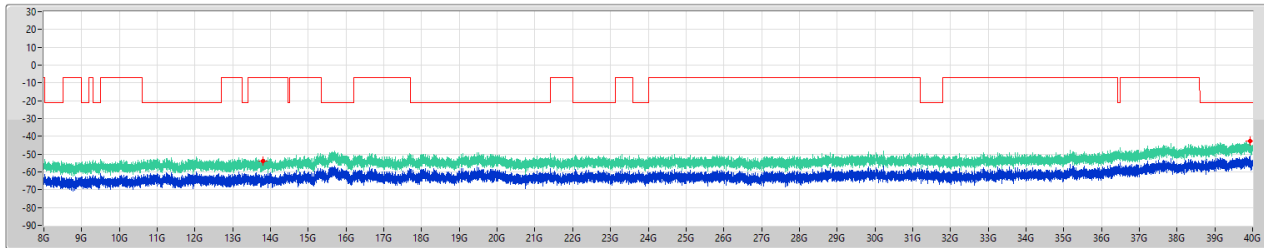


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.795G  | -53.93    | -7.00      | -46.93     | 8.32   | 0.00    | -62.25    | -62.25  |
| 8G          | 40G        | 1M      | PK   | 39.931G  | -42.71    | -21.20     | -21.51     | 8.32   | 0.00    | -51.03    | -51.03  |

6.875-7.125GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6895MHz

01/03/2023

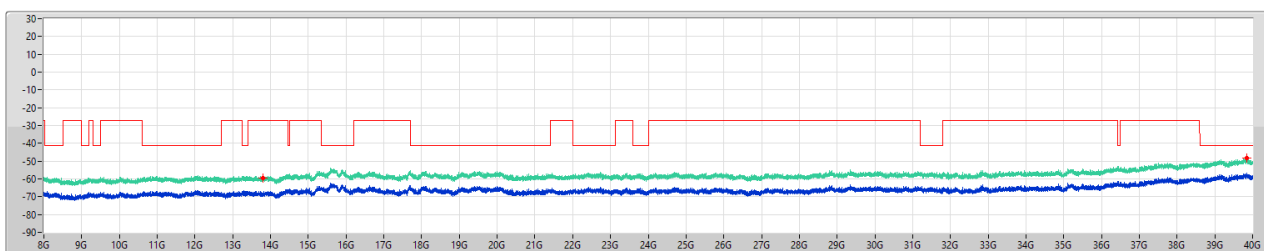


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.794G  | -59.55    | -27.00     | -32.55     | 8.32   | 0.00    | -67.87    | -67.87  |
| 8G          | 40G        | 1M      | AV   | 39.856G  | -48.46    | -41.20     | -7.26      | 8.32   | 0.00    | -56.78    | -56.78  |

6.875-7.125GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

6995MHz

01/03/2023

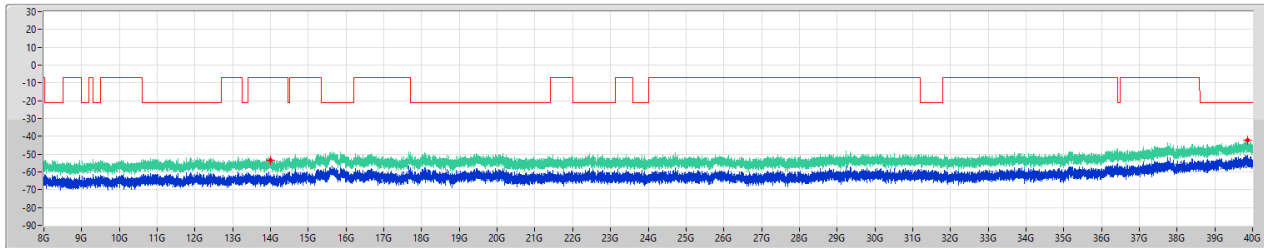


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.993G  | -53.64    | -7.00      | -46.64     | 8.32   | 0.00    | -61.96    | -61.96  |
| 8G          | 40G        | 1M      | PK   | 39.878G  | -42.23    | -21.20     | -21.03     | 8.32   | 0.00    | -50.55    | -50.55  |

6.875-7.125GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

6995MHz

01/03/2023

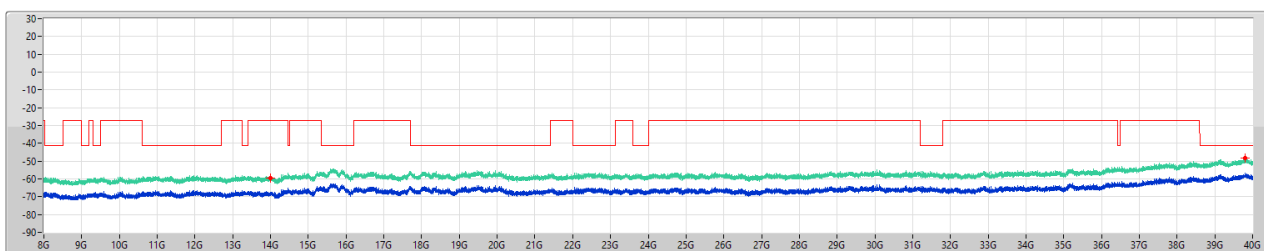


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 14.001G  | -59.37    | -27.00     | -32.37     | 8.32   | 0.00    | -67.69    | -67.69  |
| 8G          | 40G        | 1M      | AV   | 39.797G  | -48.23    | -41.20     | -7.03      | 8.32   | 0.00    | -56.55    | -56.55  |

6.875-7.125GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [PK]

7095MHz

01/03/2023

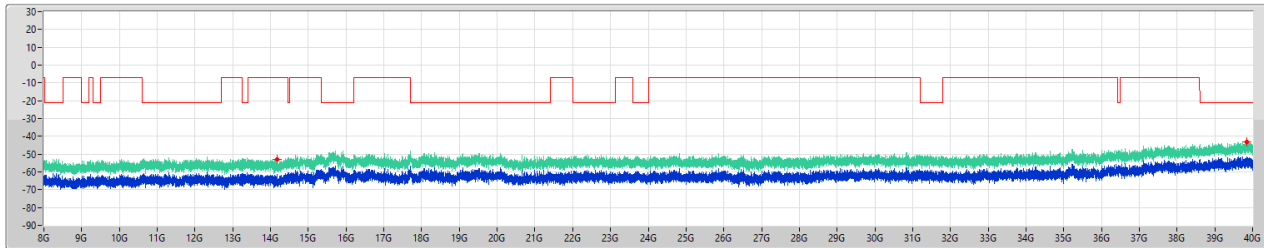


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 14.178G  | -53.14    | -7.00      | -46.14     | 8.32   | 0.00    | -61.46    | -61.46  |
| 8G          | 40G        | 1M      | PK   | 39.85G   | -43.12    | -21.20     | -21.92     | 8.32   | 0.00    | -51.44    | -51.44  |

6.875-7.125GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_1TX

CSE [AV]

7095MHz

01/03/2023

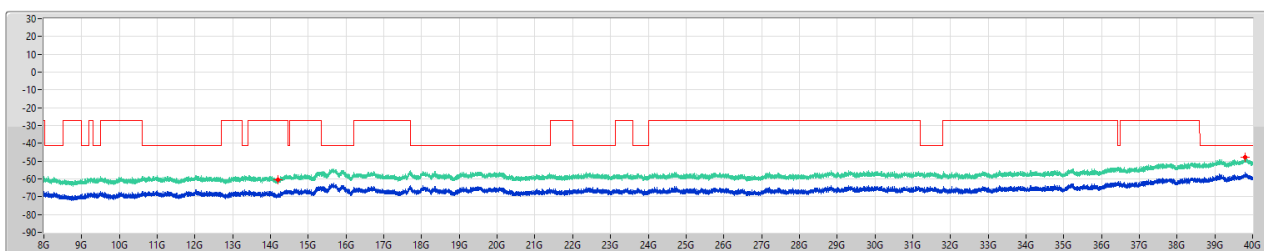


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 14.204G  | -60.26    | -27.00     | -33.26     | 8.32   | 0.00    | -68.58    | -68.58  |
| 8G          | 40G        | 1M      | AV   | 39.796G  | -47.73    | -41.20     | -6.53      | 8.32   | 0.00    | -56.05    | -56.05  |

5.925-6.425GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

5965MHz

01/03/2023

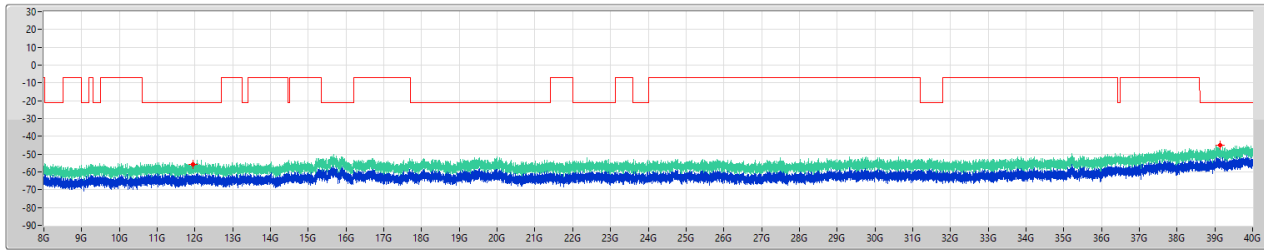


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 11.956G  | -55.80    | -21.20     | -34.60     | 6.00   | 0.00    | -61.80    | -61.80  |
| 8G          | 40G        | 1M      | PK   | 39.147G  | -44.80    | -21.20     | -23.60     | 6.00   | 0.00    | -50.80    | -50.80  |

5.925-6.425GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

5965MHz

01/03/2023

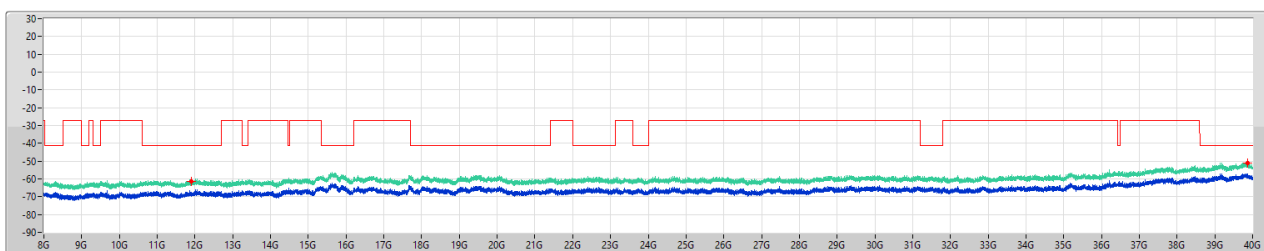


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 11.912G  | -61.28    | -41.20     | -20.08     | 6.00   | 0.00    | -67.28    | -67.28  |
| 8G          | 40G        | 1M      | AV   | 39.867G  | -51.02    | -41.20     | -9.82      | 6.00   | 0.00    | -57.02    | -57.02  |

5.925-6.425GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

6165MHz

01/03/2023

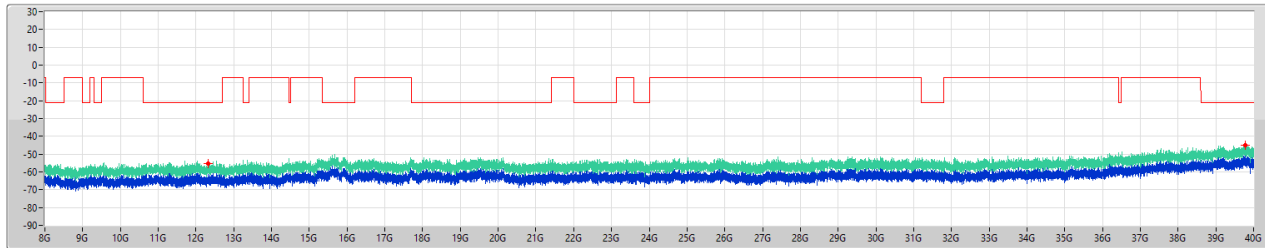


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.317G  | -55.27    | -21.20     | -34.07     | 6.00   | 0.00    | -61.27    | -61.27  |
| 8G          | 40G        | 1M      | PK   | 39.773G  | -45.22    | -21.20     | -24.02     | 6.00   | 0.00    | -51.22    | -51.22  |

5.925-6.425GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

6165MHz

01/03/2023

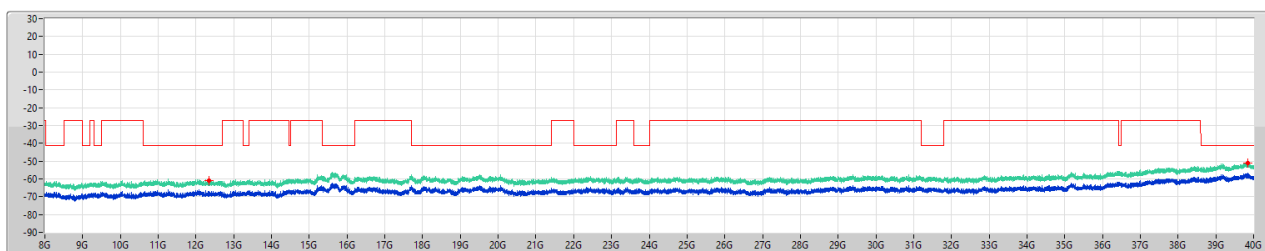


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.339G  | -60.88    | -41.20     | -19.68     | 6.00   | 0.00    | -66.88    | -66.88  |
| 8G          | 40G        | 1M      | AV   | 39.836G  | -50.90    | -41.20     | -9.70      | 6.00   | 0.00    | -56.90    | -56.90  |

5.925-6.425GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

6405MHz

01/03/2023

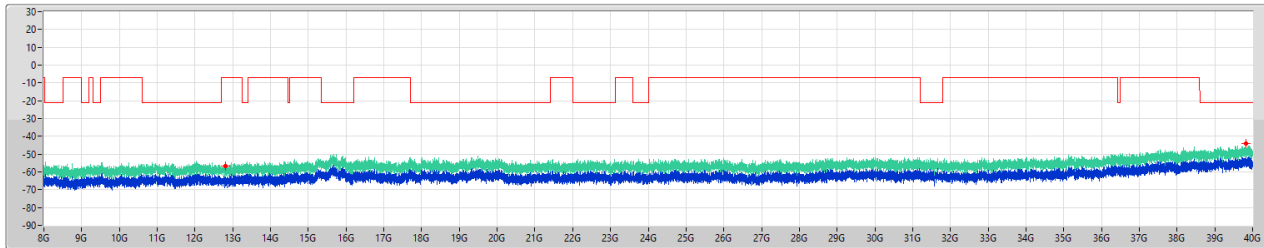

Limit:PK  
 EIRP:PK  
 Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.813G  | -56.79    | -7.00      | -49.79     | 6.00   | 0.00    | -62.79    | -62.79  |
| 8G          | 40G        | 1M      | PK   | 39.819G  | -44.21    | -21.20     | -23.01     | 6.00   | 0.00    | -50.21    | -50.21  |

5.925-6.425GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

6405MHz

01/03/2023

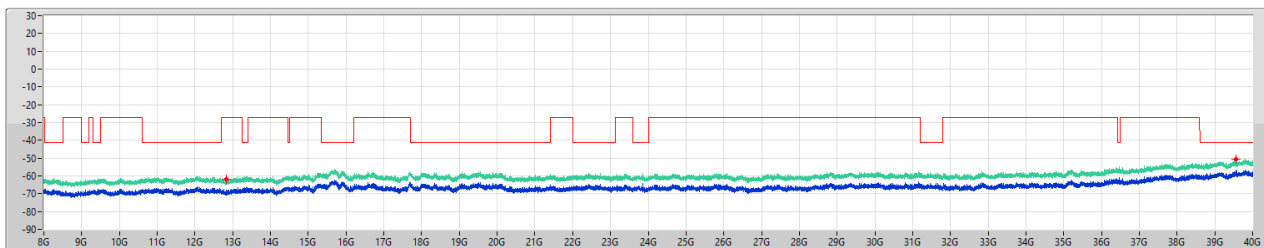

Limit:AV  
 EIRP:AV  
 Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.835G  | -61.75    | -27.00     | -34.75     | 6.00   | 0.00    | -67.75    | -67.75  |
| 8G          | 40G        | 1M      | AV   | 39.551G  | -50.54    | -41.20     | -9.34      | 6.00   | 0.00    | -56.54    | -56.54  |

6.425-6.525GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

6445MHz

01/03/2023

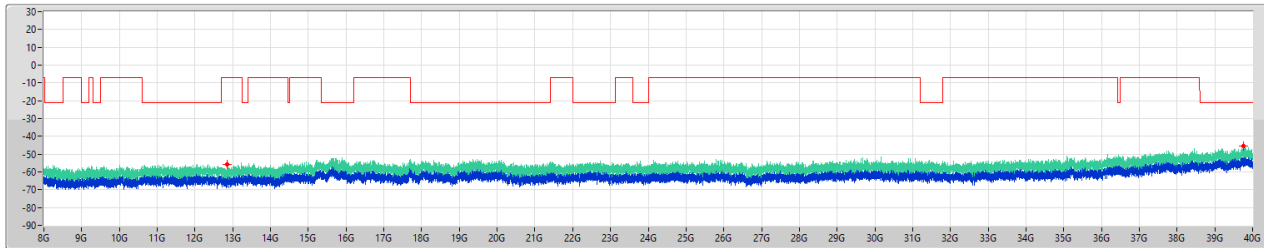


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.858G  | -55.56    | -7.00      | -48.56     | 4.87   | 0.00    | -60.43    | -60.43  |
| 8G          | 40G        | 1M      | PK   | 39.756G  | -45.33    | -21.20     | -24.13     | 4.87   | 0.00    | -50.20    | -50.20  |

6.425-6.525GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

6445MHz

01/03/2023

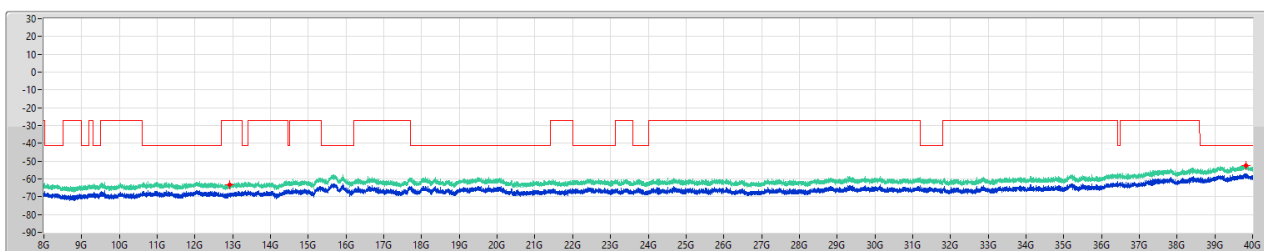


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.922G  | -63.31    | -27.00     | -36.31     | 4.87   | 0.00    | -68.18    | -68.18  |
| 8G          | 40G        | 1M      | AV   | 39.815G  | -52.33    | -41.20     | -11.13     | 4.87   | 0.00    | -57.20    | -57.20  |

6.425-6.525GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

6485MHz

01/03/2023

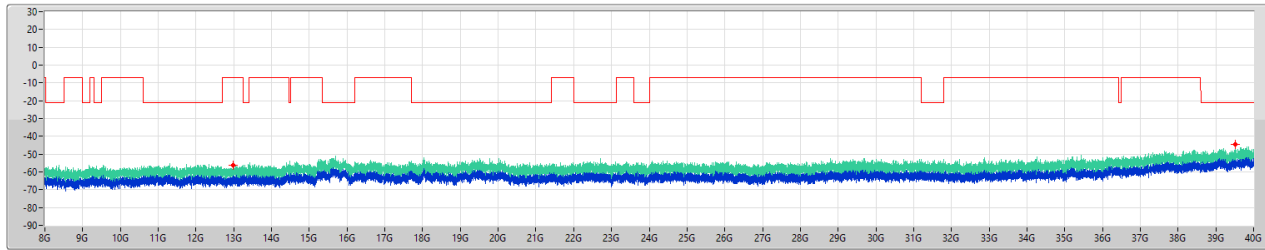


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.98G   | -56.27    | -7.00      | -49.27     | 4.87   | 0.00    | -61.14    | -61.14  |
| 8G          | 40G        | 1M      | PK   | 39.511G  | -44.64    | -21.20     | -23.44     | 4.87   | 0.00    | -49.51    | -49.51  |

6.425-6.525GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

6485MHz

01/03/2023

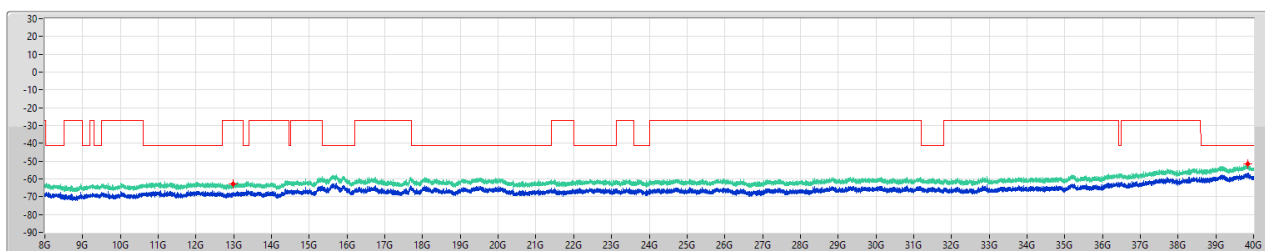


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.99G   | -62.72    | -27.00     | -35.72     | 4.87   | 0.00    | -67.59    | -67.59  |
| 8G          | 40G        | 1M      | AV   | 39.845G  | -51.62    | -41.20     | -10.42     | 4.87   | 0.00    | -56.49    | -56.49  |

6.425-6.525GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

6525MHz Straddle 6.425-6.525GHz

01/03/2023

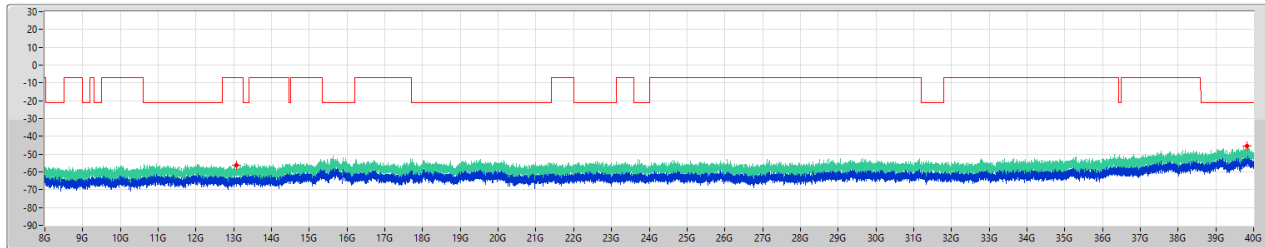


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.067G  | -56.43    | -7.00      | -49.43     | 4.87   | 0.00    | -61.30    | -61.30  |
| 8G          | 40G        | 1M      | PK   | 39.822G  | -45.70    | -21.20     | -24.50     | 4.87   | 0.00    | -50.57    | -50.57  |

6.425-6.525GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

6525MHz Straddle 6.425-6.525GHz

01/03/2023

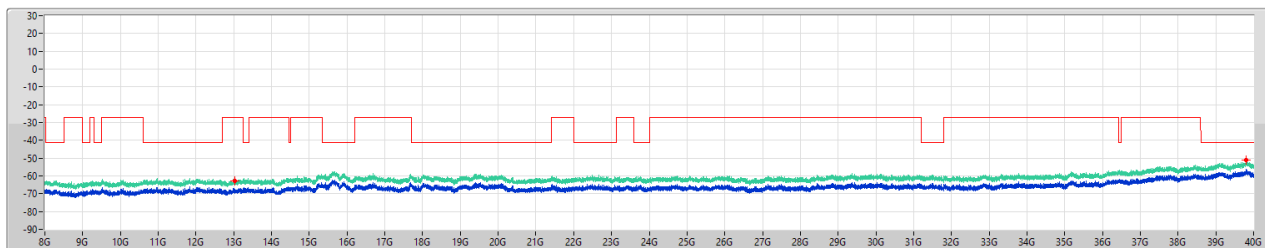


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.02G   | -62.71    | -27.00     | -35.71     | 4.87   | 0.00    | -67.58    | -67.58  |
| 8G          | 40G        | 1M      | AV   | 39.809G  | -51.16    | -41.20     | -9.96      | 4.87   | 0.00    | -56.03    | -56.03  |

6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

6565MHz

01/03/2023

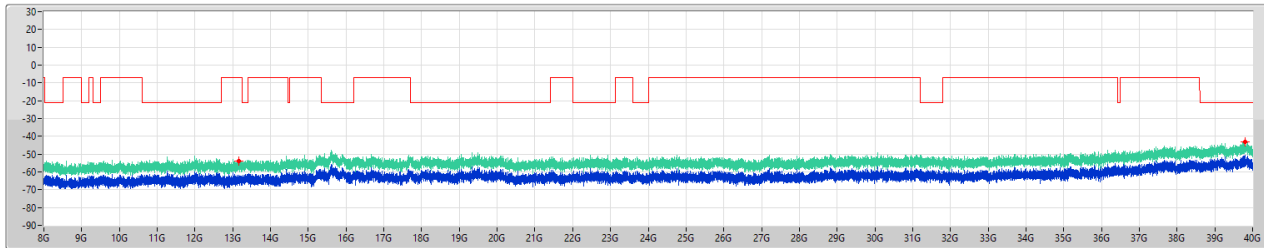


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.164G  | -54.04    | -7.00      | -47.04     | 7.65   | 0.00    | -61.69    | -61.69  |
| 8G          | 40G        | 1M      | PK   | 39.812G  | -42.96    | -21.20     | -21.76     | 7.65   | 0.00    | -50.61    | -50.61  |

6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

6565MHz

01/03/2023

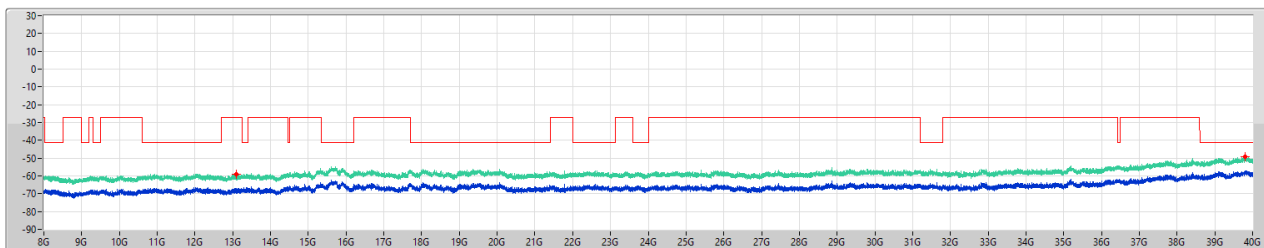


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.103G  | -59.29    | -27.00     | -32.29     | 7.65   | 0.00    | -66.94    | -66.94  |
| 8G          | 40G        | 1M      | AV   | 39.798G  | -49.43    | -41.20     | -8.23      | 7.65   | 0.00    | -57.08    | -57.08  |

6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

6685MHz

01/03/2023

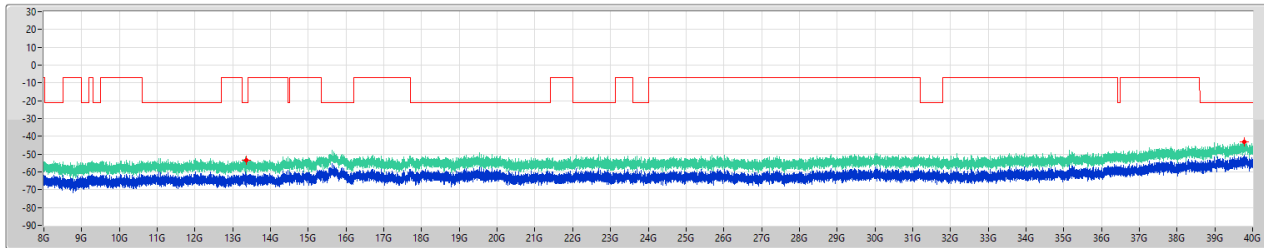


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.352G  | -53.46    | -21.20     | -32.26     | 7.65   | 0.00    | -61.11    | -61.11  |
| 8G          | 40G        | 1M      | PK   | 39.79G   | -43.09    | -21.20     | -21.89     | 7.65   | 0.00    | -50.74    | -50.74  |

6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

6685MHz

01/03/2023

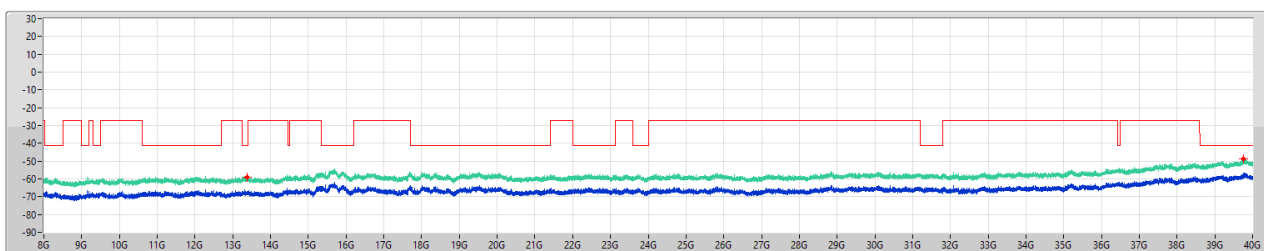


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.387G  | -59.16    | -41.20     | -17.96     | 7.65   | 0.00    | -66.81    | -66.81  |
| 8G          | 40G        | 1M      | AV   | 39.767G  | -48.97    | -41.20     | -7.77      | 7.65   | 0.00    | -56.62    | -56.62  |

6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

6845MHz

01/03/2023

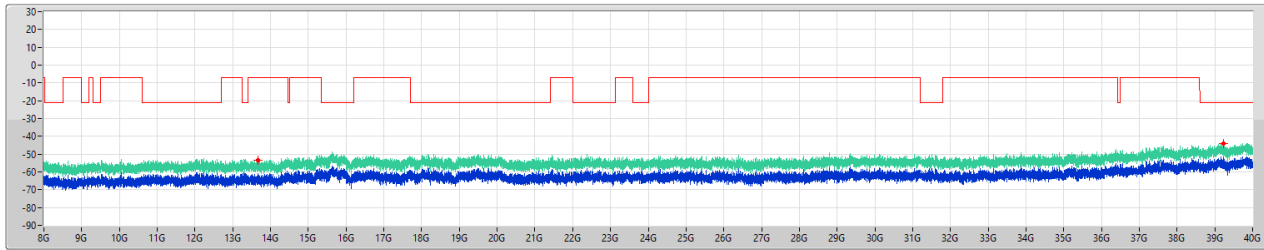


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.675G  | -53.30    | -7.00      | -46.30     | 7.65   | 0.00    | -60.95    | -60.95  |
| 8G          | 40G        | 1M      | PK   | 39.225G  | -43.89    | -21.20     | -22.69     | 7.65   | 0.00    | -51.54    | -51.54  |

6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

6845MHz

01/03/2023

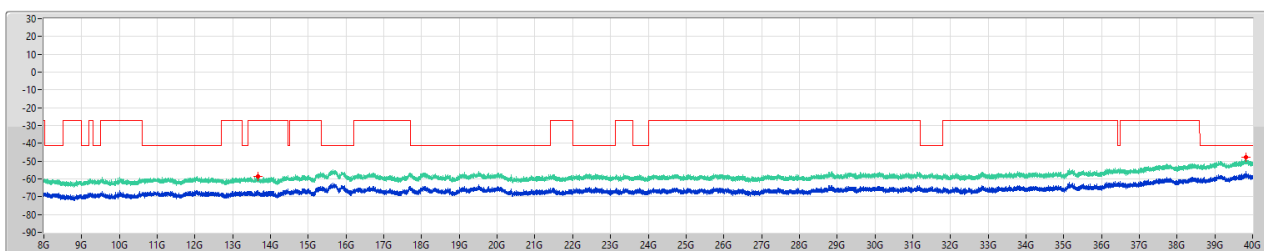


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.675G  | -58.75    | -27.00     | -31.75     | 7.65   | 0.00    | -66.40    | -66.40  |
| 8G          | 40G        | 1M      | AV   | 39.821G  | -48.01    | -41.20     | -6.81      | 7.65   | 0.00    | -55.66    | -55.66  |

6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

6885MHz Straddle 6.525-6.875GHz

01/03/2023

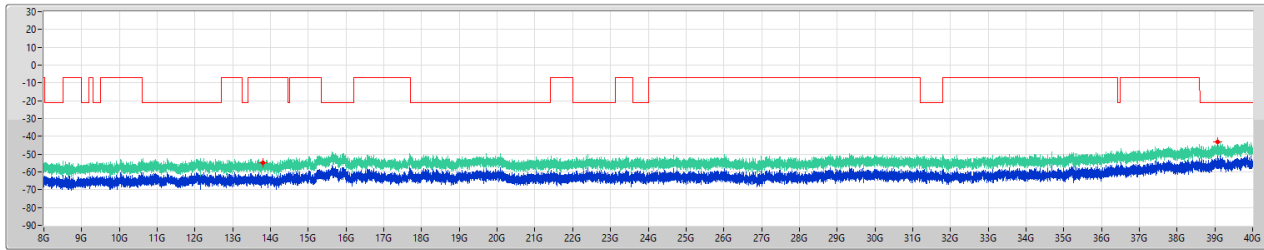


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.798G  | -54.73    | -7.00      | -47.73     | 7.65   | 0.00    | -62.38    | -62.38  |
| 8G          | 40G        | 1M      | PK   | 39.084G  | -43.09    | -21.20     | -21.89     | 7.65   | 0.00    | -50.74    | -50.74  |

6.525-6.875GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

6885MHz Straddle 6.525-6.875GHz

01/03/2023

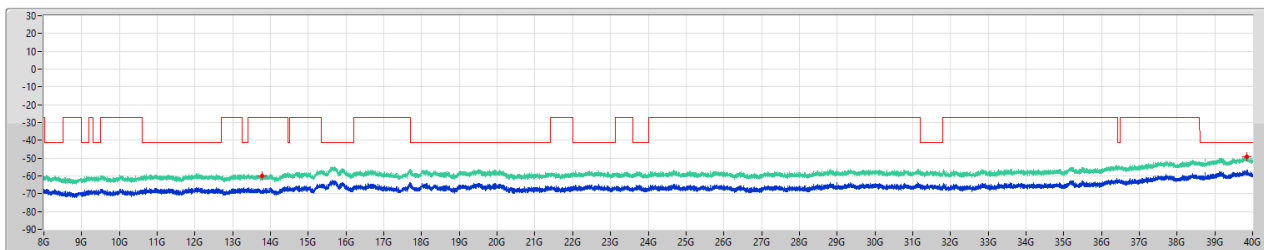


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.785G  | -60.12    | -27.00     | -33.12     | 7.65   | 0.00    | -67.77    | -67.77  |
| 8G          | 40G        | 1M      | AV   | 39.845G  | -49.15    | -41.20     | -7.95      | 7.65   | 0.00    | -56.80    | -56.80  |

6.875-7.125GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

6925MHz

01/03/2023

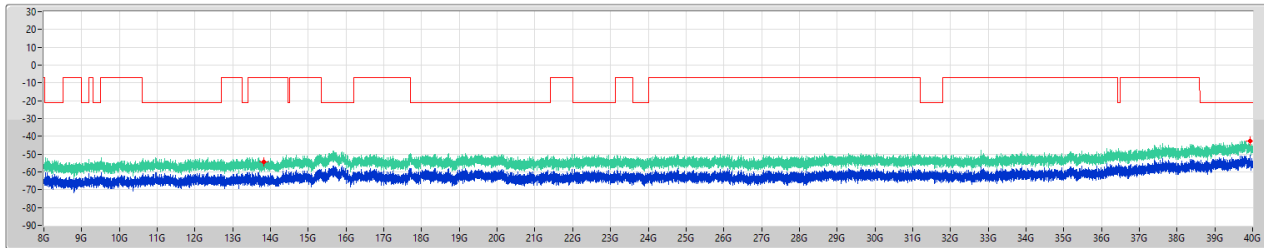


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.83G   | -54.16    | -7.00      | -47.16     | 8.32   | 0.00    | -62.48    | -62.48  |
| 8G          | 40G        | 1M      | PK   | 39.93G   | -42.51    | -21.20     | -21.31     | 8.32   | 0.00    | -50.83    | -50.83  |

6.875-7.125GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

6925MHz

01/03/2023

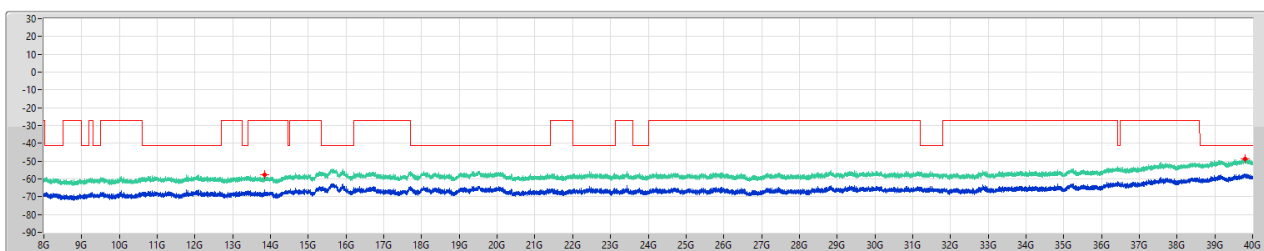


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.842G  | -57.88    | -27.00     | -30.88     | 8.32   | 0.00    | -66.20    | -66.20  |
| 8G          | 40G        | 1M      | AV   | 39.793G  | -48.70    | -41.20     | -7.50      | 8.32   | 0.00    | -57.02    | -57.02  |

6.875-7.125GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

7005MHz

01/03/2023

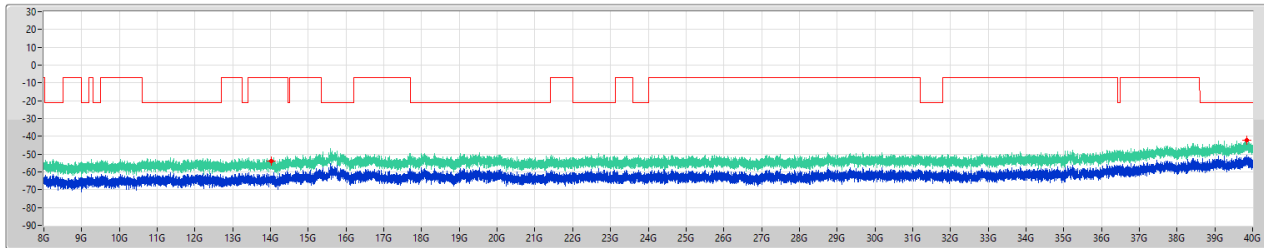


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 14.019G  | -53.79    | -7.00      | -46.79     | 8.32   | 0.00    | -62.11    | -62.11  |
| 8G          | 40G        | 1M      | PK   | 39.842G  | -42.33    | -21.20     | -21.13     | 8.32   | 0.00    | -50.65    | -50.65  |

6.875-7.125GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

7005MHz

01/03/2023

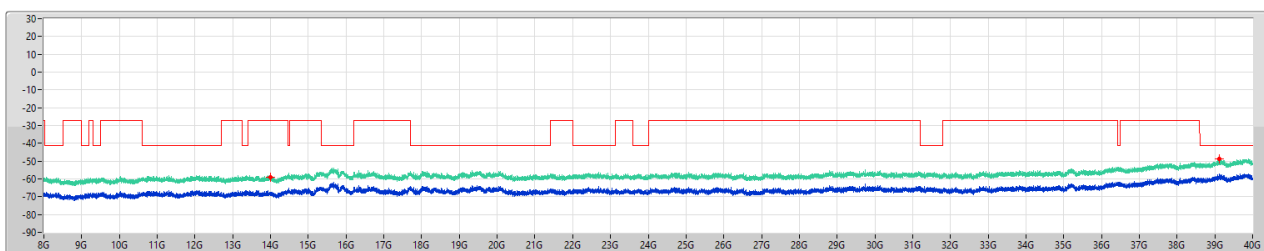


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 14.006G  | -59.09    | -27.00     | -32.09     | 8.32   | 0.00    | -67.41    | -67.41  |
| 8G          | 40G        | 1M      | AV   | 39.117G  | -48.87    | -41.20     | -7.67      | 8.32   | 0.00    | -57.19    | -57.19  |

6.875-7.125GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [PK]

7085MHz

01/03/2023

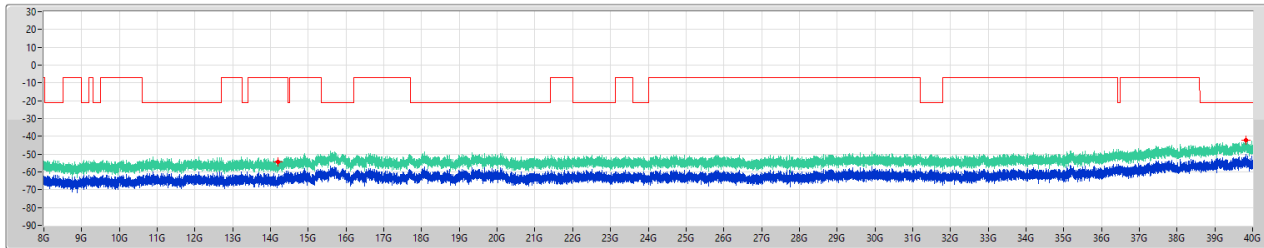


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 14.189G  | -54.58    | -7.00      | -47.58     | 8.32   | 0.00    | -62.90    | -62.90  |
| 8G          | 40G        | 1M      | PK   | 39.83G   | -42.01    | -21.20     | -20.81     | 8.32   | 0.00    | -50.33    | -50.33  |

6.875-7.125GHz\_802.11ax\_HEW40\_Nss1,(MCS0)\_1TX

CSE [AV]

7085MHz

01/03/2023

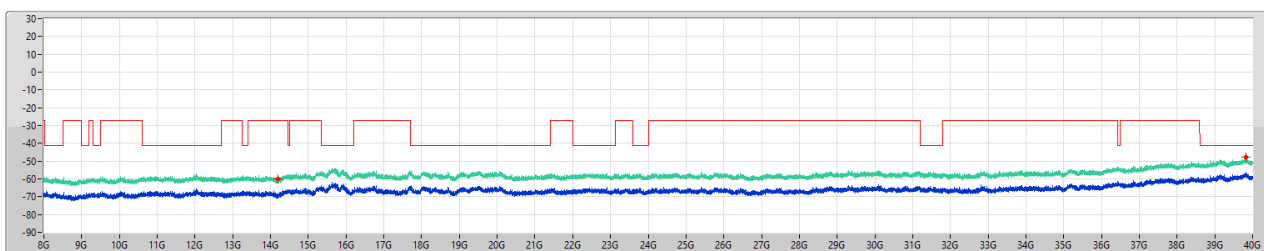


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 14.193G  | -59.89    | -27.00     | -32.89     | 8.32   | 0.00    | -68.21    | -68.21  |
| 8G          | 40G        | 1M      | AV   | 39.829G  | -48.04    | -41.20     | -6.84      | 8.32   | 0.00    | -56.36    | -56.36  |

5.925-6.425GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

5985MHz

01/03/2023

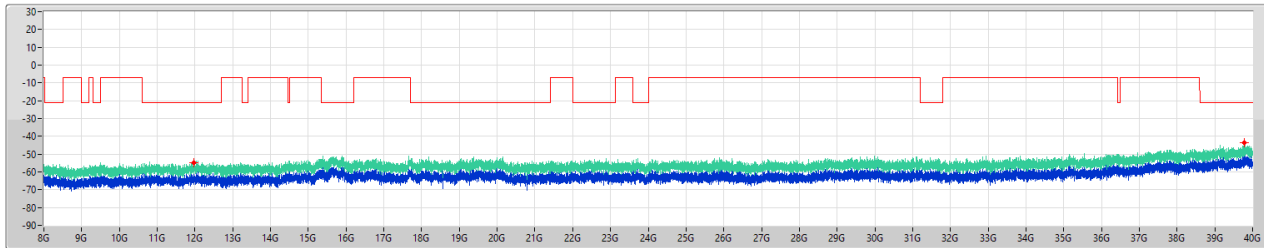


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 11.971G  | -55.05    | -21.20     | -33.85     | 6.00   | 0.00    | -61.05    | -61.05  |
| 8G          | 40G        | 1M      | PK   | 39.773G  | -43.57    | -21.20     | -22.37     | 6.00   | 0.00    | -49.57    | -49.57  |

5.925-6.425GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

5985MHz

01/03/2023

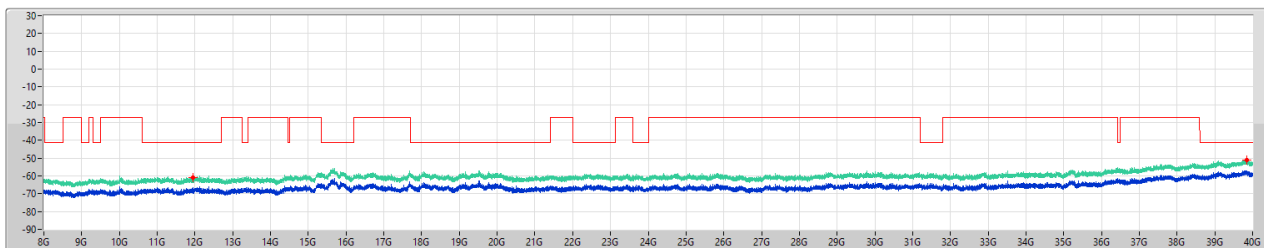


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 11.941G  | -60.77    | -41.20     | -19.57     | 6.00   | 0.00    | -66.77    | -66.77  |
| 8G          | 40G        | 1M      | AV   | 39.843G  | -51.13    | -41.20     | -9.93      | 6.00   | 0.00    | -57.13    | -57.13  |

5.925-6.425GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

6145MHz

01/03/2023

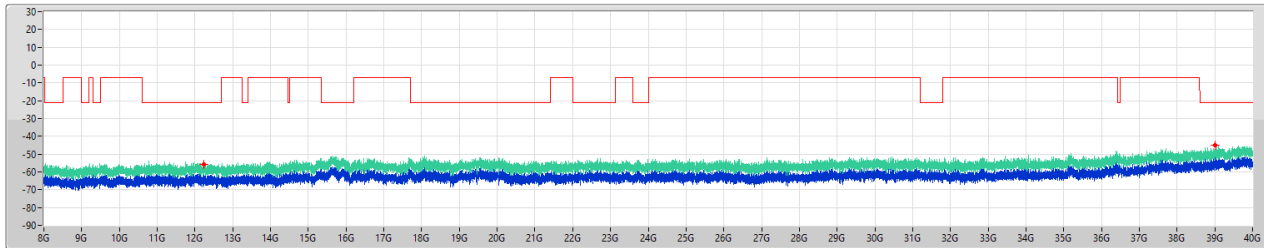


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.224G  | -55.94    | -21.20     | -34.74     | 6.00   | 0.00    | -61.94    | -61.94  |
| 8G          | 40G        | 1M      | PK   | 39G      | -45.00    | -21.20     | -23.80     | 6.00   | 0.00    | -51.00    | -51.00  |

5.925-6.425GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

6145MHz

01/03/2023

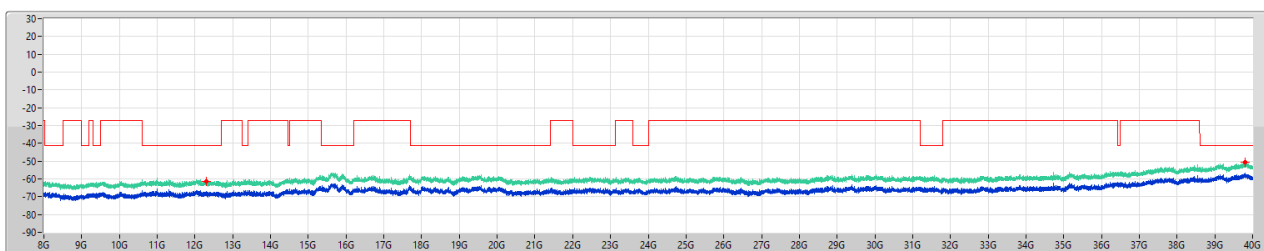


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.301G  | -61.22    | -41.20     | -20.02     | 6.00   | 0.00    | -67.22    | -67.22  |
| 8G          | 40G        | 1M      | AV   | 39.801G  | -50.84    | -41.20     | -9.64      | 6.00   | 0.00    | -56.84    | -56.84  |

5.925-6.425GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

6385MHz

01/03/2023

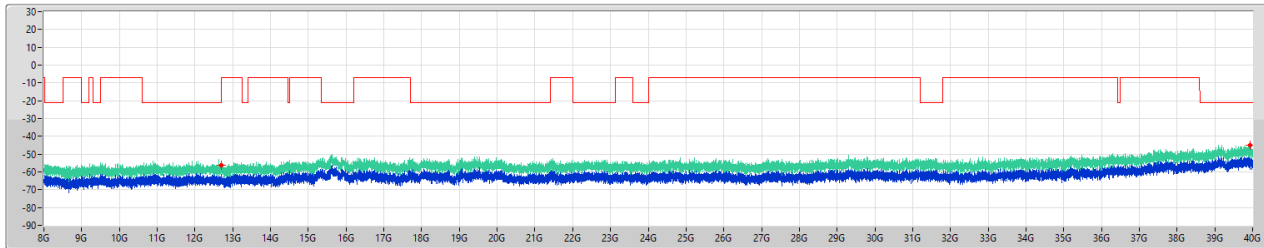


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.7G    | -56.39    | -21.20     | -35.19     | 6.00   | 0.00    | -62.39    | -62.39  |
| 8G          | 40G        | 1M      | PK   | 39.926G  | -44.99    | -21.20     | -23.79     | 6.00   | 0.00    | -50.99    | -50.99  |

5.925-6.425GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

6385MHz

01/03/2023

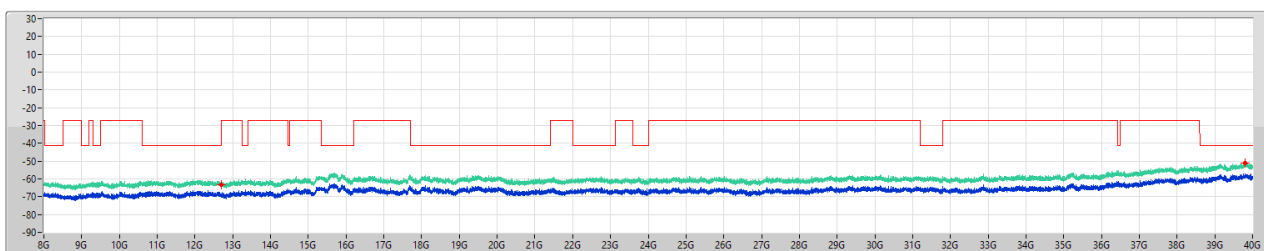


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.698G  | -63.06    | -41.20     | -21.86     | 6.00   | 0.00    | -69.06    | -69.06  |
| 8G          | 40G        | 1M      | AV   | 39.798G  | -51.08    | -41.20     | -9.88      | 6.00   | 0.00    | -57.08    | -57.08  |

6.425-6.525GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

6465MHz

01/03/2023

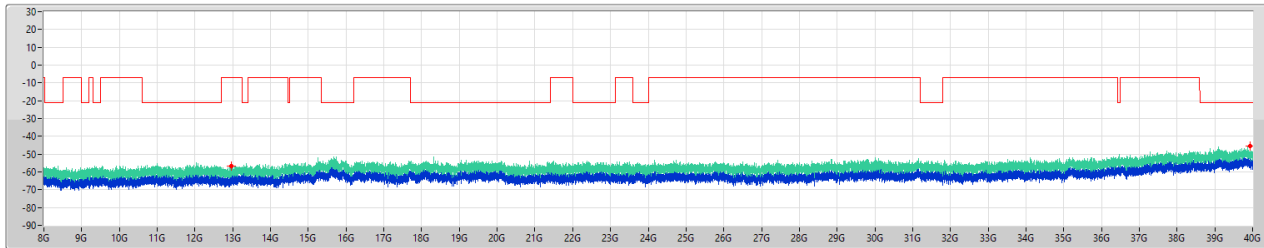


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.962G  | -56.76    | -7.00      | -49.76     | 4.87   | 0.00    | -61.63    | -61.63  |
| 8G          | 40G        | 1M      | PK   | 39.927G  | -45.37    | -21.20     | -24.17     | 4.87   | 0.00    | -50.24    | -50.24  |

6.425-6.525GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

6465MHz

01/03/2023

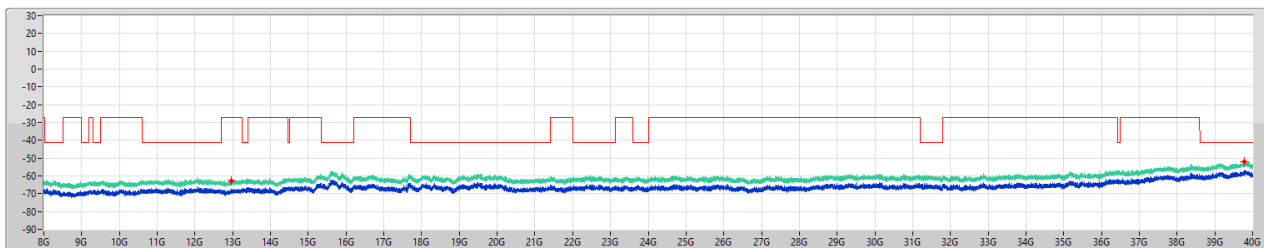


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.967G  | -62.75    | -27.00     | -35.75     | 4.87   | 0.00    | -67.62    | -67.62  |
| 8G          | 40G        | 1M      | AV   | 39.79G   | -52.06    | -41.20     | -10.86     | 4.87   | 0.00    | -56.93    | -56.93  |

6.425-6.525GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

6545MHz Straddle 6.425-6.525GHz

01/03/2023

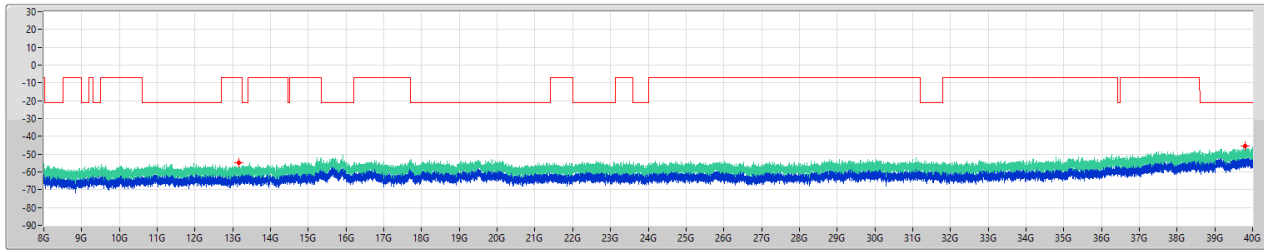


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.153G  | -54.64    | -7.00      | -47.64     | 4.87   | 0.00    | -59.51    | -59.51  |
| 8G          | 40G        | 1M      | PK   | 39.812G  | -45.58    | -21.20     | -24.38     | 4.87   | 0.00    | -50.45    | -50.45  |

6.425-6.525GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

6545MHz Straddle 6.425-6.525GHz

01/03/2023

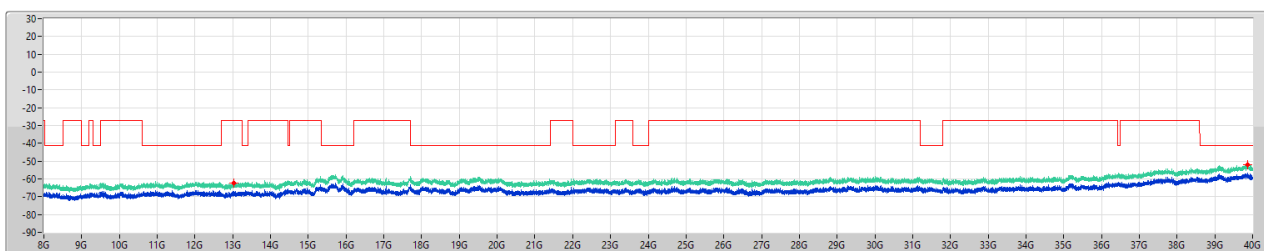


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.028G  | -62.12    | -27.00     | -35.12     | 4.87   | 0.00    | -66.99    | -66.99  |
| 8G          | 40G        | 1M      | AV   | 39.877G  | -52.06    | -41.20     | -10.86     | 4.87   | 0.00    | -56.93    | -56.93  |

6.525-6.875GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

6625MHz

01/03/2023

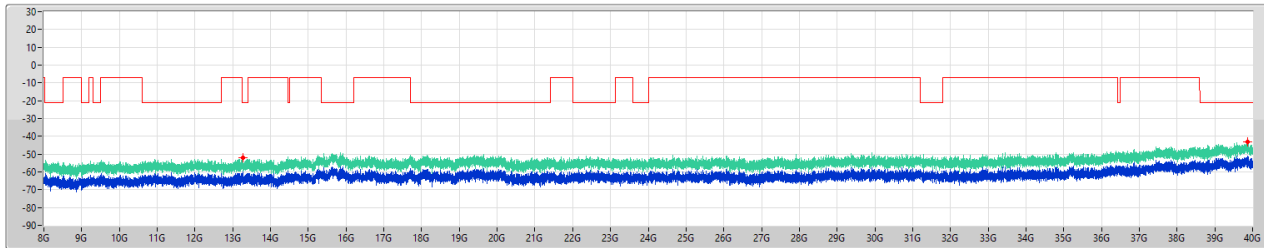


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.279G  | -52.06    | -21.20     | -30.86     | 7.65   | 0.00    | -59.71    | -59.71  |
| 8G          | 40G        | 1M      | PK   | 39.868G  | -43.34    | -21.20     | -22.14     | 7.65   | 0.00    | -50.99    | -50.99  |

6.525-6.875GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

6625MHz

01/03/2023

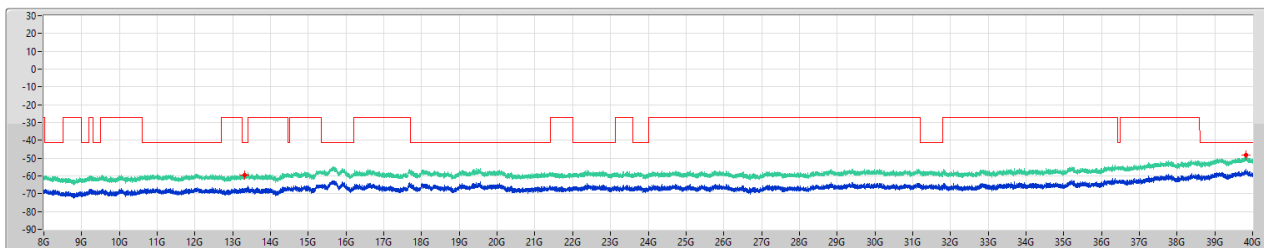


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.32G   | -59.30    | -41.20     | -18.10     | 7.65   | 0.00    | -66.95    | -66.95  |
| 8G          | 40G        | 1M      | AV   | 39.827G  | -48.50    | -41.20     | -7.30      | 7.65   | 0.00    | -56.15    | -56.15  |

6.525-6.875GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

6705MHz

01/03/2023

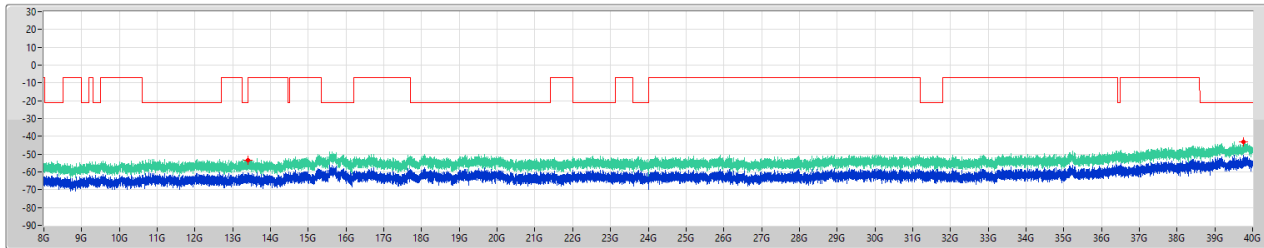


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.393G  | -53.29    | -21.20     | -32.09     | 7.65   | 0.00    | -60.94    | -60.94  |
| 8G          | 40G        | 1M      | PK   | 39.754G  | -43.06    | -21.20     | -21.86     | 7.65   | 0.00    | -50.71    | -50.71  |

6.525-6.875GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

6705MHz

01/03/2023

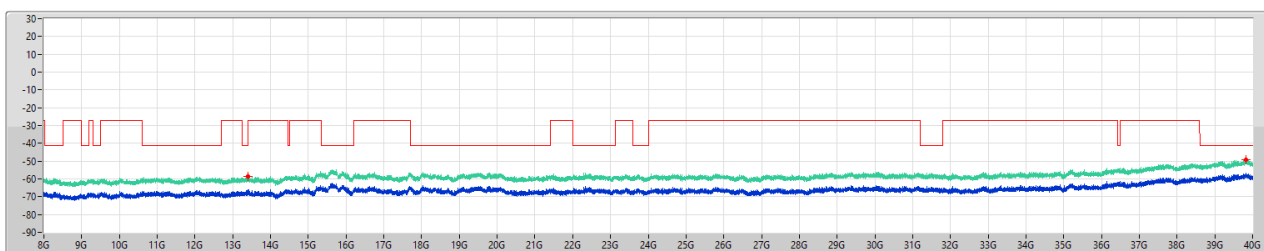


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.397G  | -58.43    | -41.20     | -17.23     | 7.65   | 0.00    | -66.08    | -66.08  |
| 8G          | 40G        | 1M      | AV   | 39.814G  | -49.00    | -41.20     | -7.80      | 7.65   | 0.00    | -56.65    | -56.65  |

6.525-6.875GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

6785MHz

01/03/2023

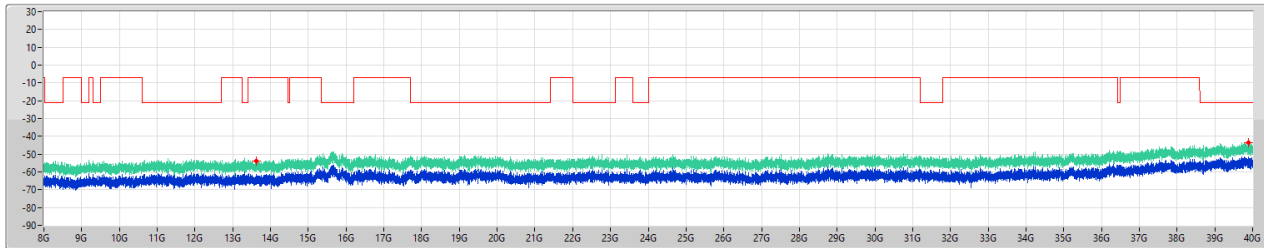


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.623G  | -53.93    | -7.00      | -46.93     | 7.65   | 0.00    | -61.58    | -61.58  |
| 8G          | 40G        | 1M      | PK   | 39.879G  | -43.70    | -21.20     | -22.50     | 7.65   | 0.00    | -51.35    | -51.35  |

6.525-6.875GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

6785MHz

01/03/2023

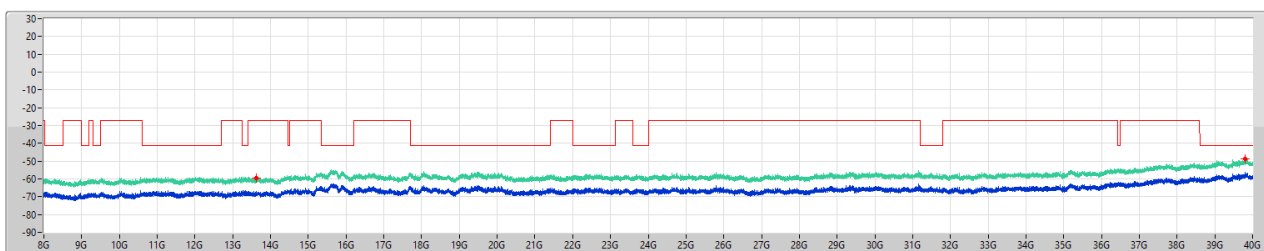


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.634G  | -59.38    | -27.00     | -32.38     | 7.65   | 0.00    | -67.03    | -67.03  |
| 8G          | 40G        | 1M      | AV   | 39.792G  | -48.74    | -41.20     | -7.54      | 7.65   | 0.00    | -56.39    | -56.39  |

6.525-6.875GHz\_802.11ax HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

6865MHz Straddle 6.525-6.875GHz

01/03/2023

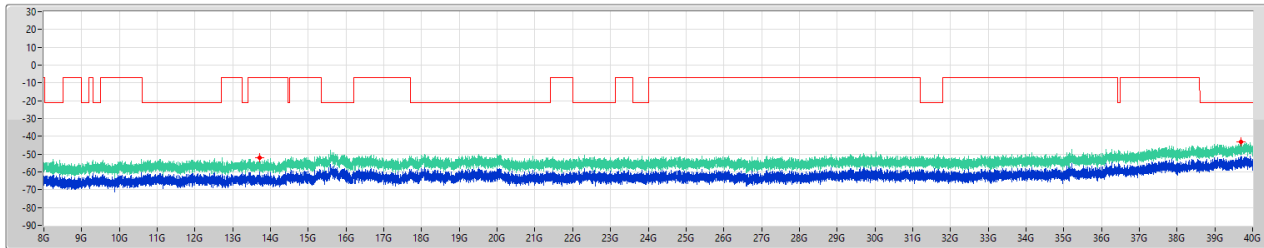

Limit:PK  
 EIRP:PK  
 Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.706G  | -51.95    | -7.00      | -44.95     | 7.65   | 0.00    | -59.60    | -59.60  |
| 8G          | 40G        | 1M      | PK   | 39.687G  | -43.21    | -21.20     | -22.01     | 7.65   | 0.00    | -50.86    | -50.86  |

6.525-6.875GHz\_802.11ax HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

6865MHz Straddle 6.525-6.875GHz

01/03/2023

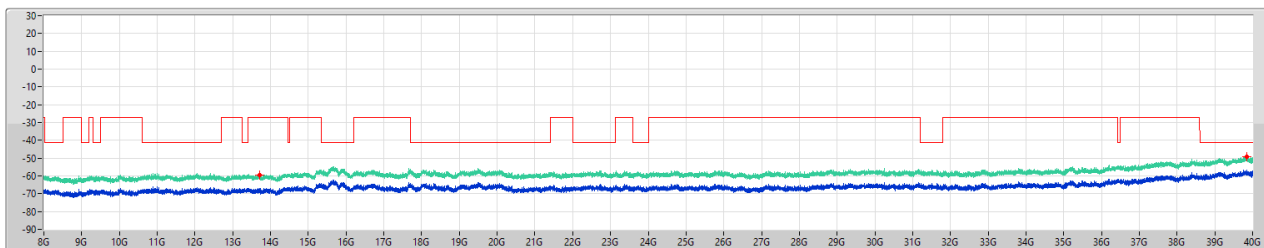

Limit:AV  
 EIRP:AV  
 Port 1


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.704G  | -59.41    | -27.00     | -32.41     | 7.65   | 0.00    | -67.06    | -67.06  |
| 8G          | 40G        | 1M      | AV   | 39.856G  | -49.02    | -41.20     | -7.82      | 7.65   | 0.00    | -56.67    | -56.67  |

6.875-7.125GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

6945MHz

01/03/2023

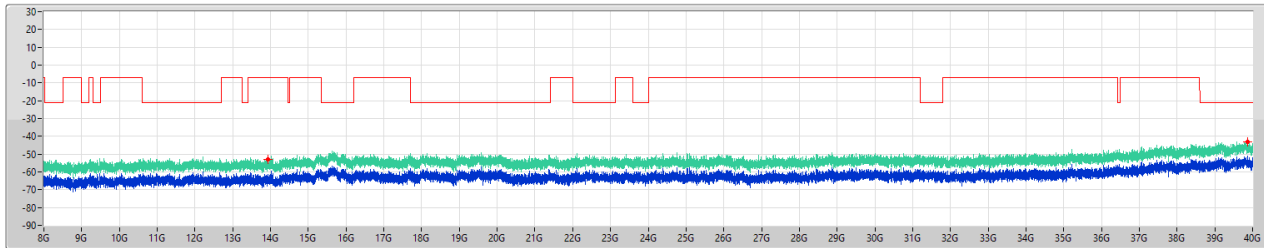


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | ERP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.929G  | -53.10   | -7.00      | -46.10     | 8.32   | 0.00    | -61.42    | -61.42  |
| 8G          | 40G        | 1M      | PK   | 39.872G  | -42.99   | -21.20     | -21.79     | 8.32   | 0.00    | -51.31    | -51.31  |

6.875-7.125GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

6945MHz

01/03/2023

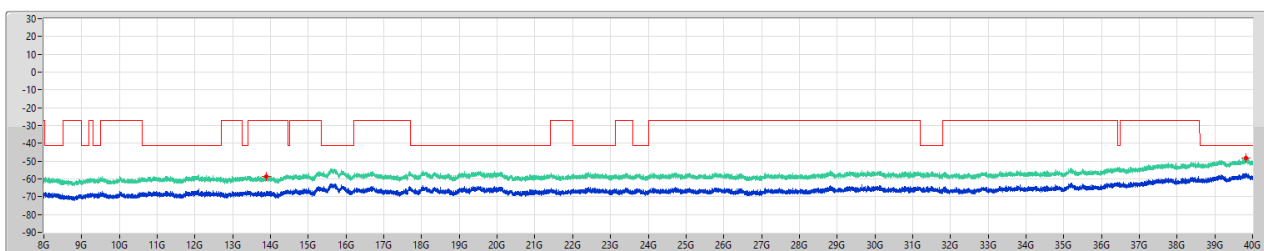


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | ERP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.886G  | -58.53   | -27.00     | -31.53     | 8.32   | 0.00    | -66.85    | -66.85  |
| 8G          | 40G        | 1M      | AV   | 39.832G  | -48.25   | -41.20     | -7.05      | 8.32   | 0.00    | -56.57    | -56.57  |

6.875-7.125GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [PK]

7025MHz

01/03/2023

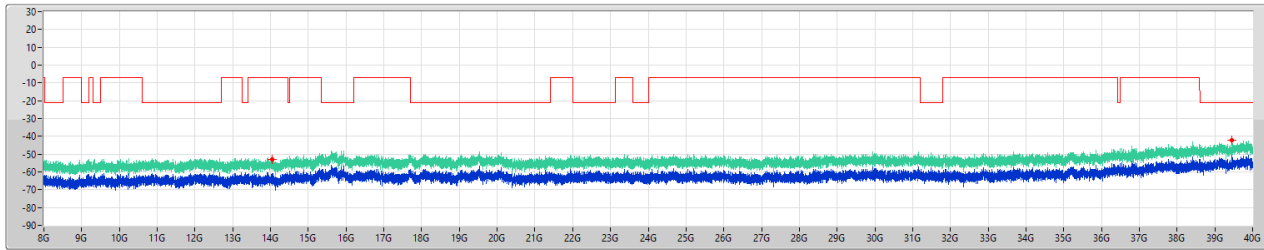


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 14.035G  | -52.75    | -7.00      | -45.75     | 8.32   | 0.00    | -61.07    | -61.07  |
| 8G          | 40G        | 1M      | PK   | 39.457G  | -42.09    | -21.20     | -20.89     | 8.32   | 0.00    | -50.41    | -50.41  |

6.875-7.125GHz\_802.11ax\_HEW80\_Nss1,(MCS0)\_1TX

CSE [AV]

7025MHz

01/03/2023

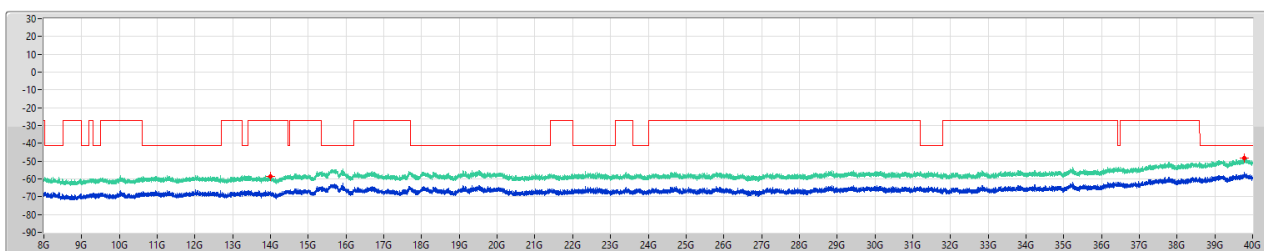


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 14.005G  | -58.79    | -27.00     | -31.79     | 8.32   | 0.00    | -67.11    | -67.11  |
| 8G          | 40G        | 1M      | AV   | 39.79G   | -48.09    | -41.20     | -6.89      | 8.32   | 0.00    | -56.41    | -56.41  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [PK]

6025MHz

01/03/2023

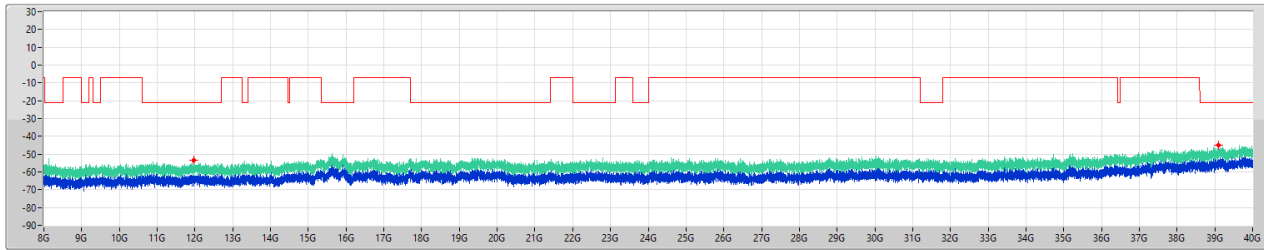


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 11.971G  | -53.40    | -21.20     | -32.20     | 6.00   | 0.00    | -59.40    | -59.40  |
| 8G          | 40G        | 1M      | PK   | 39.09G   | -45.00    | -21.20     | -23.80     | 6.00   | 0.00    | -51.00    | -51.00  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [AV]

6025MHz

01/03/2023

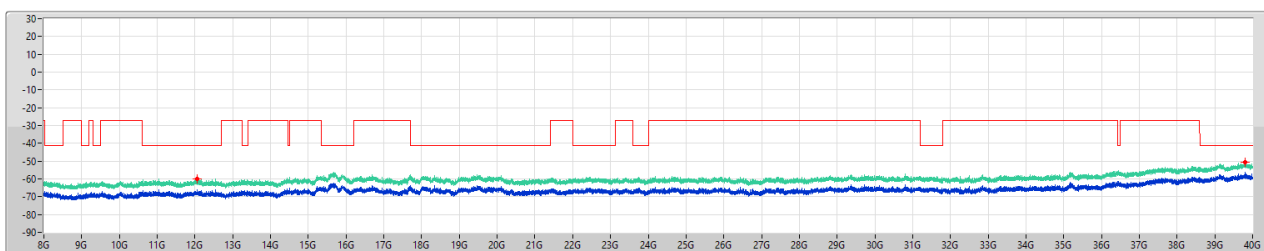


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.061G  | -60.01    | -41.20     | -18.81     | 6.00   | 0.00    | -66.01    | -66.01  |
| 8G          | 40G        | 1M      | AV   | 39.799G  | -50.43    | -41.20     | -9.23      | 6.00   | 0.00    | -56.43    | -56.43  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [PK]

6185MHz

01/03/2023

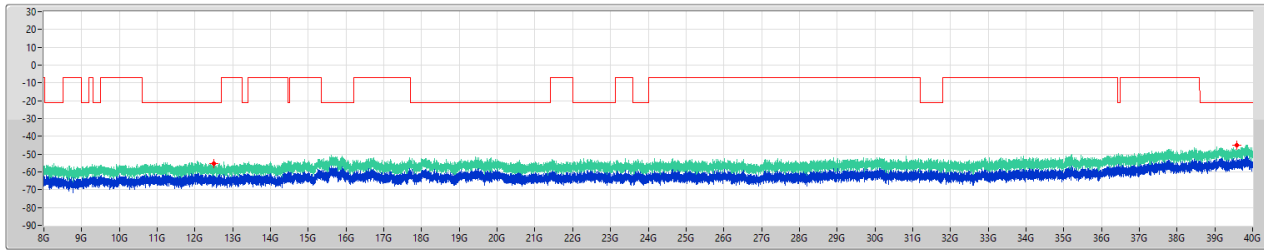


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.488G  | -55.24    | -21.20     | -34.04     | 6.00   | 0.00    | -61.24    | -61.24  |
| 8G          | 40G        | 1M      | PK   | 39.579G  | -44.87    | -21.20     | -23.67     | 6.00   | 0.00    | -50.87    | -50.87  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [AV]

6185MHz

01/03/2023

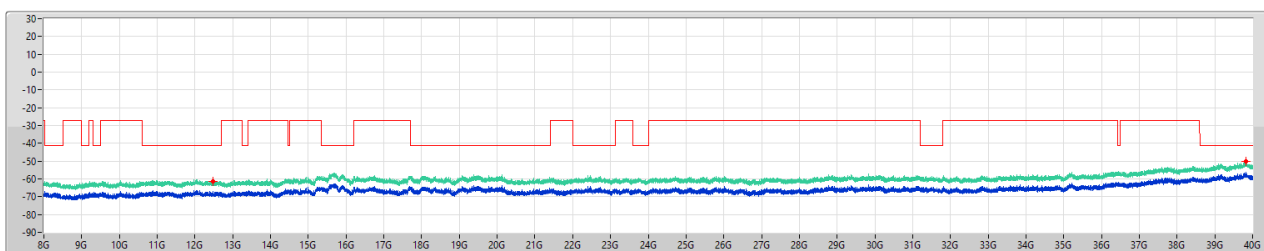


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.466G  | -61.18    | -41.20     | -19.98     | 6.00   | 0.00    | -67.18    | -67.18  |
| 8G          | 40G        | 1M      | AV   | 39.82G   | -50.35    | -41.20     | -9.15      | 6.00   | 0.00    | -56.35    | -56.35  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [PK]

6345MHz

01/03/2023

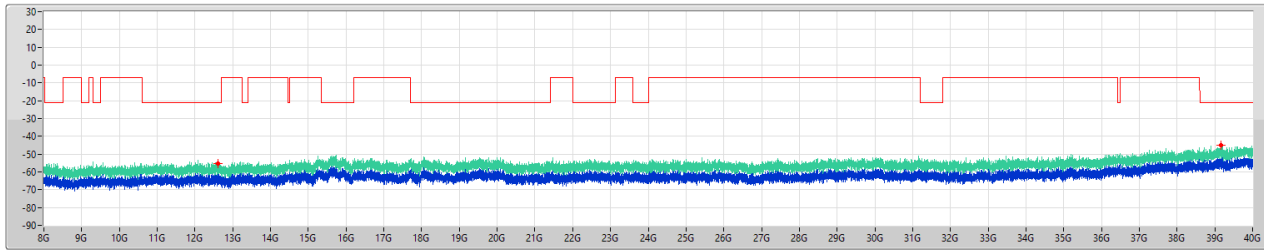


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 12.601G  | -55.10    | -21.20     | -33.90     | 6.00   | 0.00    | -61.10    | -61.10  |
| 8G          | 40G        | 1M      | PK   | 39.155G  | -45.21    | -21.20     | -24.01     | 6.00   | 0.00    | -51.21    | -51.21  |

5.925-6.425GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [AV]

6345MHz

01/03/2023

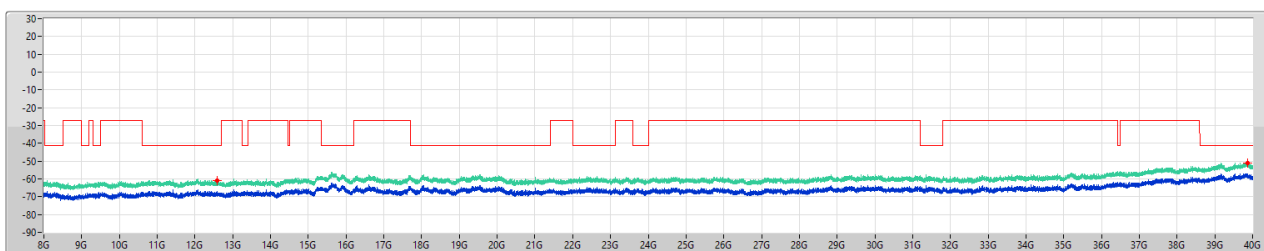


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 12.582G  | -61.12    | -41.20     | -19.92     | 6.00   | 0.00    | -67.12    | -67.12  |
| 8G          | 40G        | 1M      | AV   | 39.866G  | -51.01    | -41.20     | -9.81      | 6.00   | 0.00    | -57.01    | -57.01  |

6.425-6.525GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [PK]

6505MHz

01/03/2023

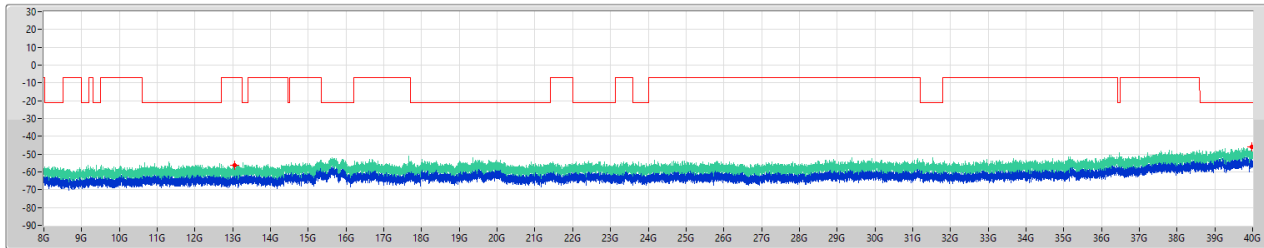


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.04G   | -56.22    | -7.00      | -49.22     | 4.87   | 0.00    | -61.09    | -61.09  |
| 8G          | 40G        | 1M      | PK   | 39.988G  | -45.97    | -21.20     | -24.77     | 4.87   | 0.00    | -50.84    | -50.84  |

6.425-6.525GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [AV]

6505MHz

01/03/2023

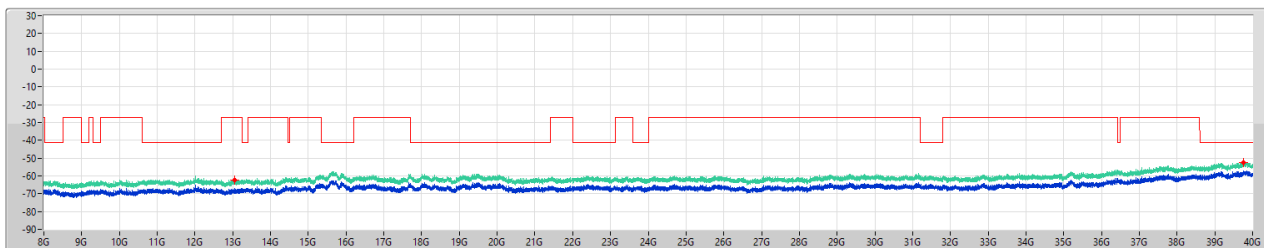


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.045G  | -62.33    | -27.00     | -35.33     | 4.87   | 0.00    | -67.20    | -67.20  |
| 8G          | 40G        | 1M      | AV   | 39.768G  | -52.27    | -41.20     | -11.07     | 4.87   | 0.00    | -57.14    | -57.14  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [PK]

6665MHz

01/03/2023

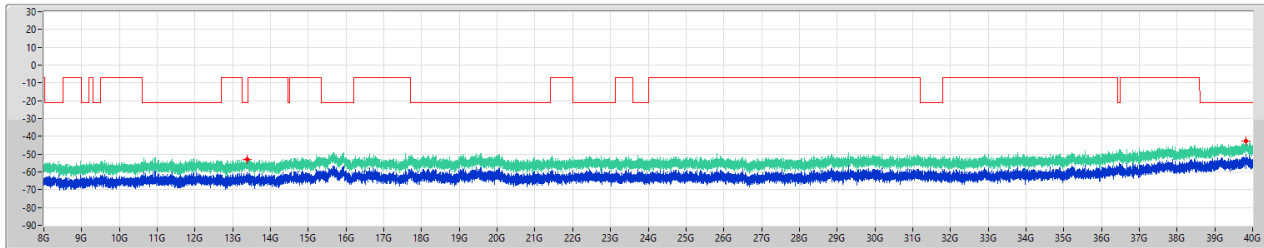


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.376G  | -53.04    | -21.20     | -31.84     | 7.65   | 0.00    | -60.69    | -60.69  |
| 8G          | 40G        | 1M      | PK   | 39.814G  | -42.75    | -21.20     | -21.55     | 7.65   | 0.00    | -50.40    | -50.40  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [AV]

6665MHz

01/03/2023

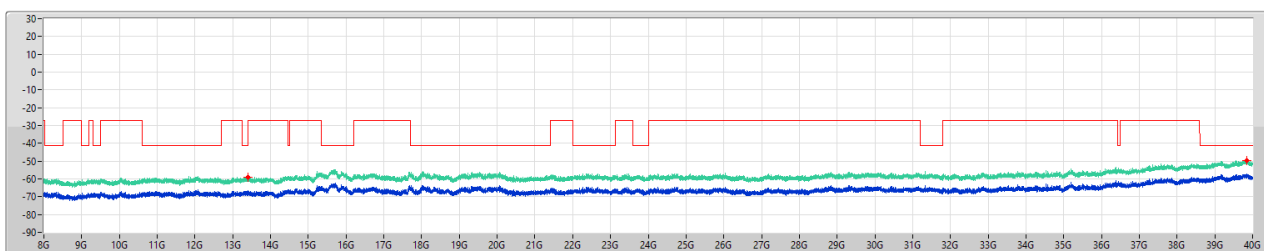


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.395G  | -59.12    | -41.20     | -17.92     | 7.65   | 0.00    | -66.77    | -66.77  |
| 8G          | 40G        | 1M      | AV   | 39.854G  | -49.76    | -41.20     | -8.56      | 7.65   | 0.00    | -57.41    | -57.41  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [PK]

6825MHz

01/03/2023

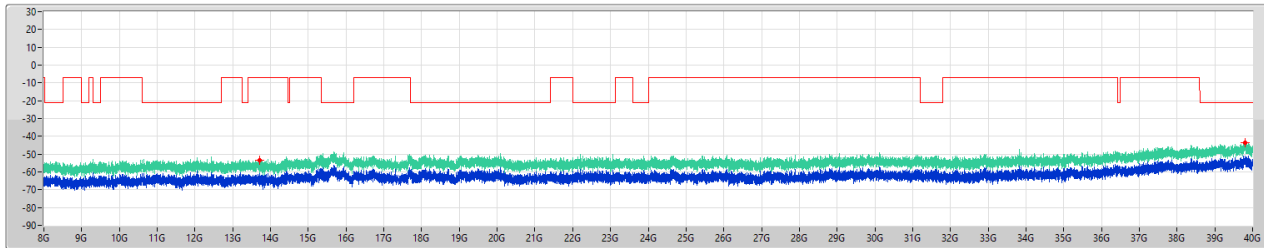


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 13.72G   | -53.46    | -7.00      | -46.46     | 7.65   | 0.00    | -61.11    | -61.11  |
| 8G          | 40G        | 1M      | PK   | 39.798G  | -43.50    | -21.20     | -22.30     | 7.65   | 0.00    | -51.15    | -51.15  |

6.525-6.875GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [AV]

6825MHz

01/03/2023

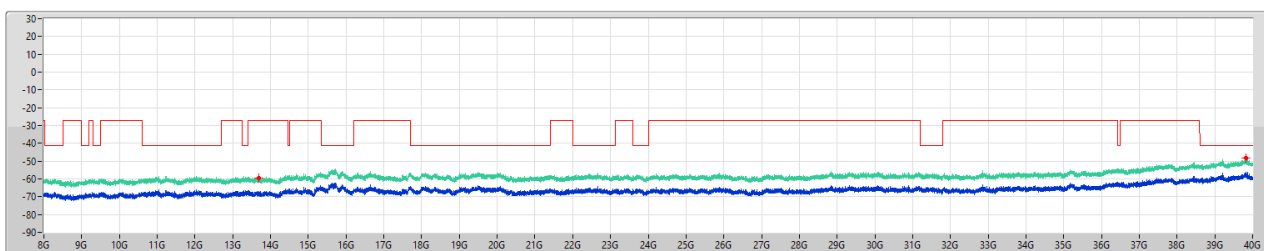


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.684G  | -59.31    | -27.00     | -32.31     | 7.65   | 0.00    | -66.96    | -66.96  |
| 8G          | 40G        | 1M      | AV   | 39.832G  | -48.41    | -41.20     | -7.21      | 7.65   | 0.00    | -56.06    | -56.06  |

6.875-7.125GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [PK]

6985MHz

01/03/2023

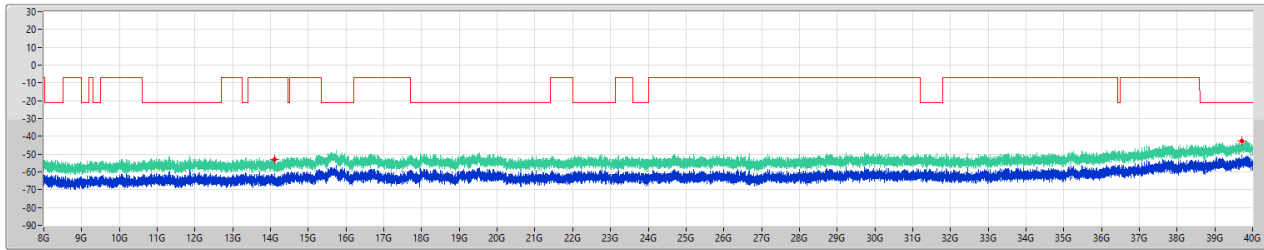


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | PK   | 14.1G    | -52.76    | -7.00      | -45.76     | 8.32   | 0.00    | -61.08    | -61.08  |
| 8G          | 40G        | 1M      | PK   | 39.721G  | -42.48    | -21.20     | -21.28     | 8.32   | 0.00    | -50.80    | -50.80  |

6.875-7.125GHz\_802.11ax\_HEW160\_Nss1,(MCS0)\_1TX

CSE [AV]

6985MHz

01/03/2023

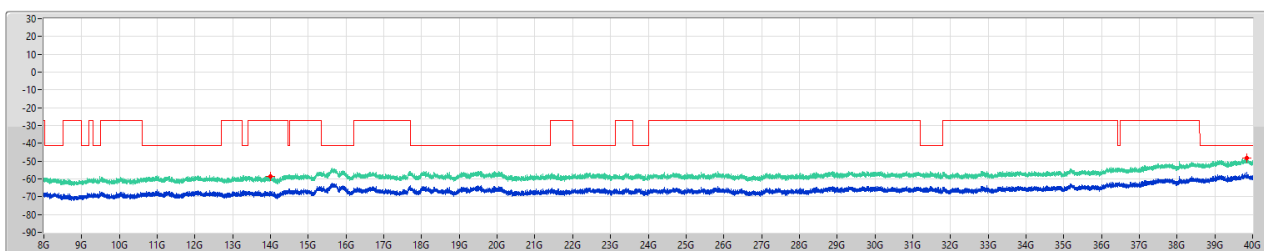


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|
| 8G          | 40G        | 1M      | AV   | 13.995G  | -58.50    | -27.00     | -31.50     | 8.32   | 0.00    | -66.82    | -66.82  |
| 8G          | 40G        | 1M      | AV   | 39.838G  | -48.16    | -41.20     | -6.96      | 8.32   | 0.00    | -56.48    | -56.48  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

CSE [PK]

5955MHz

01/03/2023

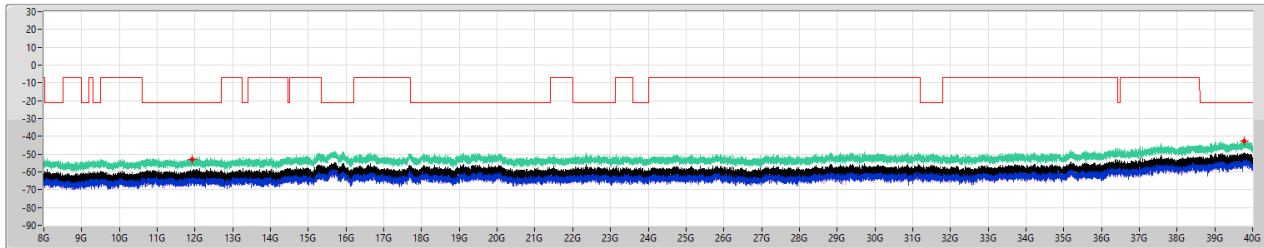


| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 8G          | 40G        | 1M      | PK   | 11.921G  | -53.01    | -21.20     | -31.81     | 6.49   | 0.00    | -59.50    | -64.24  | -61.27  |
| 8G          | 40G        | 1M      | PK   | 39.785G  | -42.70    | -21.20     | -21.50     | 6.49   | 0.00    | -49.19    | -51.56  | -52.94  |

5.925-6.425GHz\_802.11ax\_HEW20\_Nss1,(MCS0)\_2TX

CSE [AV]

5955MHz

01/03/2023

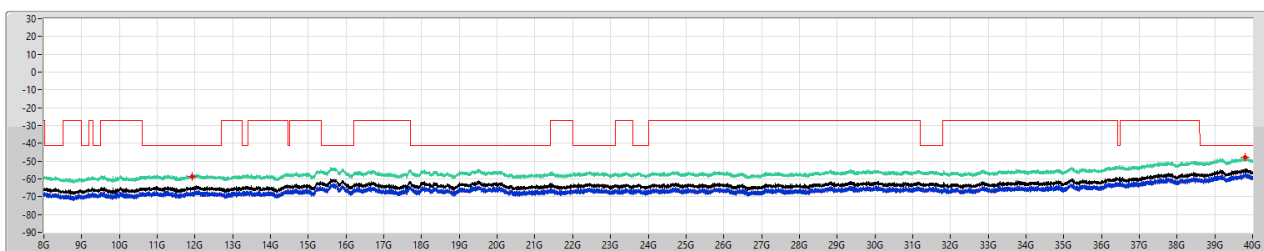

| F-Start(Hz) | F-Stop(Hz) | RBW(Hz) | Type | Freq(Hz) | EIRP(dBm) | Limit(dBm) | Margin(dB) | DG(dB) | Ref(dB) | Psum(dBm) | P1(dBm) | P2(dBm) |
|-------------|------------|---------|------|----------|-----------|------------|------------|--------|---------|-----------|---------|---------|
| 8G          | 40G        | 1M      | AV   | 11.916G  | -58.40    | -41.20     | -17.20     | 6.49   | 0.00    | -64.89    | -67.90  | -67.90  |
| 8G          | 40G        | 1M      | AV   | 39.796G  | -47.65    | -41.20     | -6.45      | 6.49   | 0.00    | -54.14    | -56.88  | -57.44  |