

Router Quick Operation Guide


Gigabit dual-band router

List of items:

1. Router host*1
2. USBC-Typec cable*1
3. Instruction manual*1
4. Network cable*1

Quick installation

1. First plug in the power supply and network cable, as shown in the figure below.

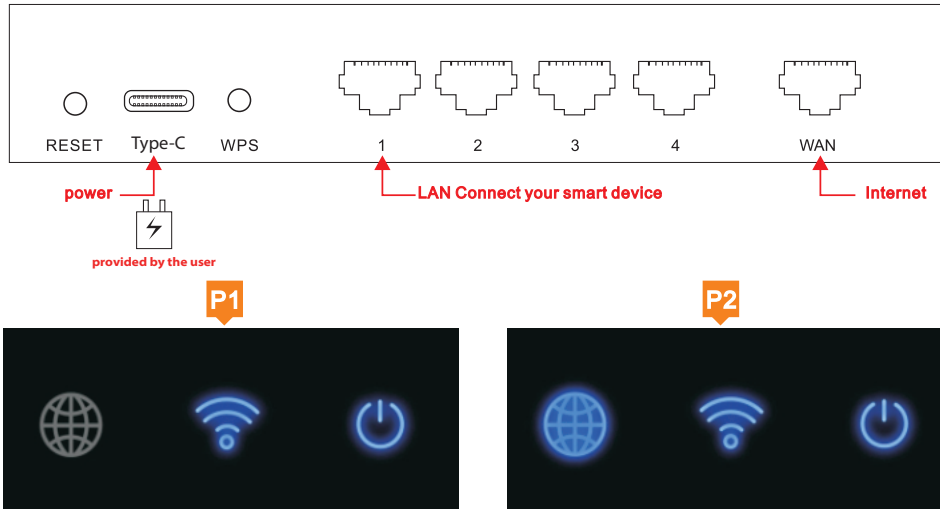

1. Plug in the power supply, wait for about 30 seconds, and the indicator will appear as shown in the picture, (P1)
2. Plug the network cable into the WAN port, wait for about 20 seconds, and the indicator will appear as shown (P2) The network is already connected。
3. Open the WiFi list of the phone, find Router-XXX, enter the password 12345678 click to connect

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC' s RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.

正

Change the WiFi password


Step 1: Connect to the WIFI of Router-XXX and stay connected.




Step 2: Open the browser, enter the URL 192.168.11.1, and then click Enter.




Step 3: Select the language as English, enter the login password admin, and then click Login.

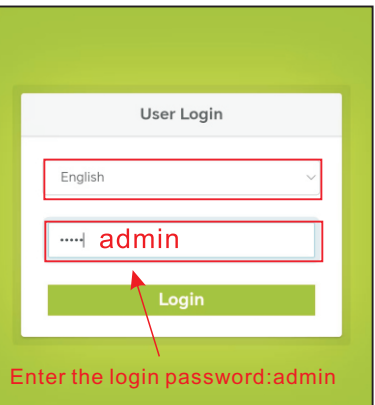

Step 4: Enter the WIFI name and password you need to modify directly, and then click Save.

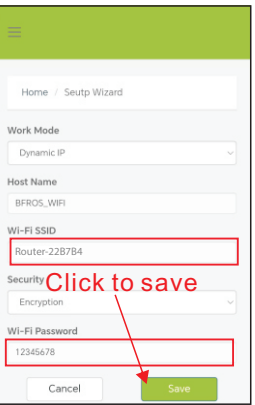


Step 5: Wait 30 seconds, return to the original WIFI list, find the modified WIFI name, and enter the password to connect.

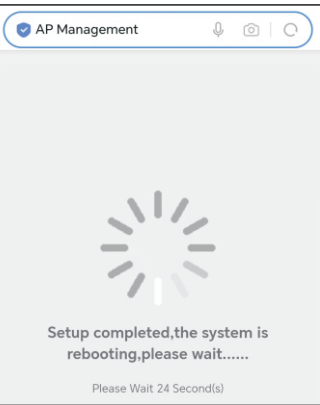

Steps for broadband number dialing to access the Internet:


Step 1: Connect to Router-XXX WIFI and stay connected.

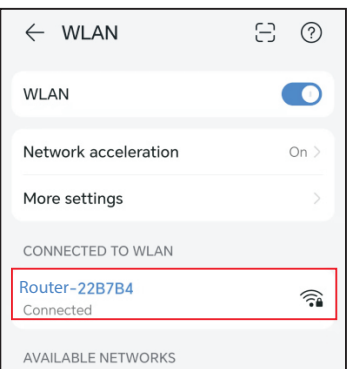


Step 2: Open the browser, enter 192.168.11.1, and then click Enter.




Step 3: Select the language as English, enter the login password admin, and then click Login.

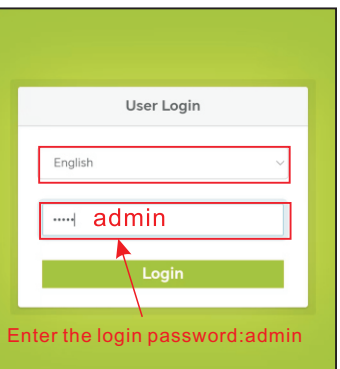

Step 4: Select the working mode: PPPoE (ADSL dialing), enter the broadband account number and password below, and then click Save.

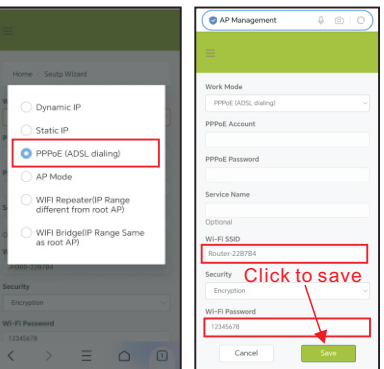

Step 5: Wait for 30 seconds, the three lights turn on, open the mobile WIFI list and enter the password to connect.

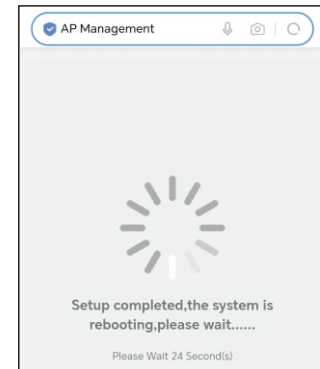

反