



802.11ax-HE80 26dB Bandwidth


Channel 42 (5210MHz)

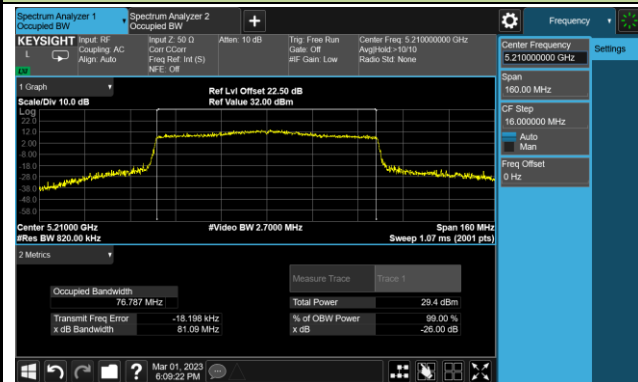


Channel 58 (5290MHz)

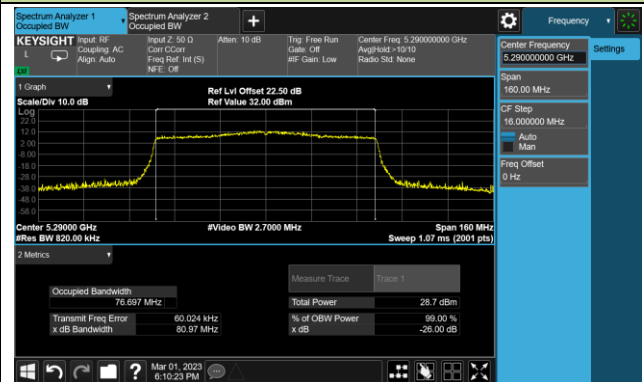


Channel 106 (5530MHz)

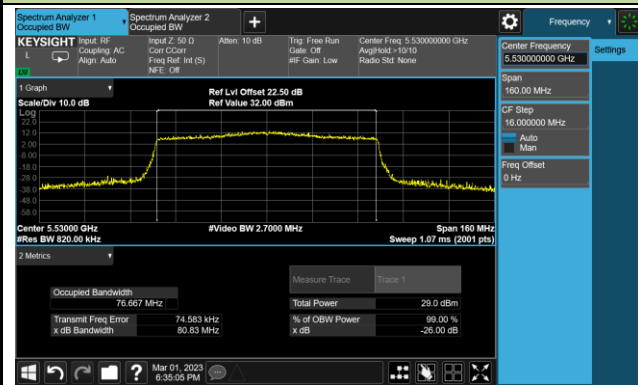


Channel 122 (5610MHz)

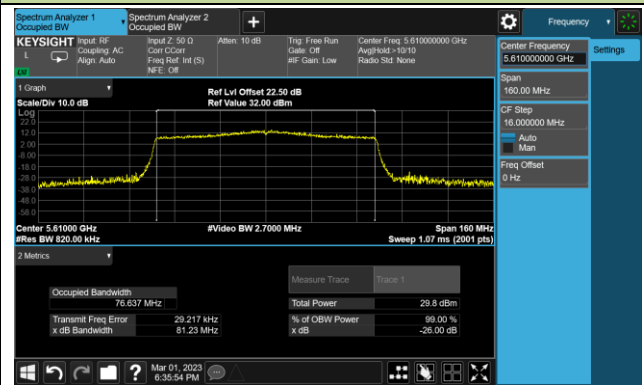

Channel 138 (5690MHz)

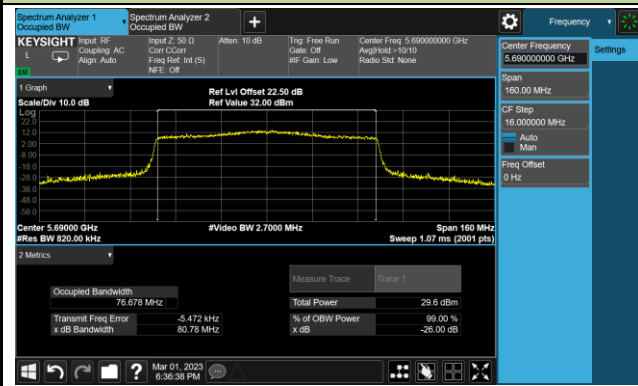


Channel 155 (5775MHz)

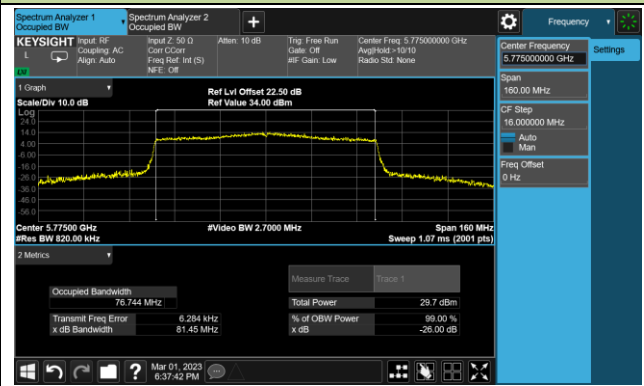


802.11ax-HE160 26dB Bandwidth

Channel 50 (5250MHz)

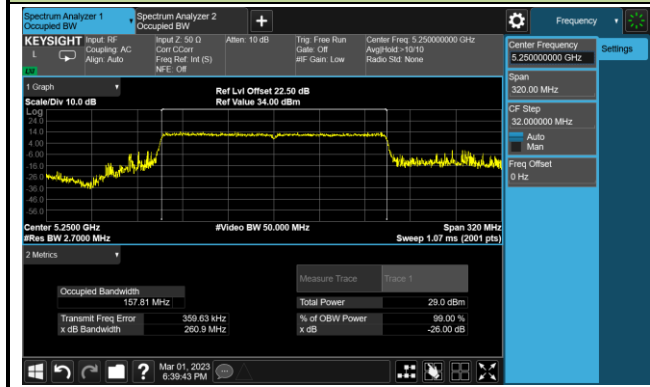

Channel 114 (5570MHz)

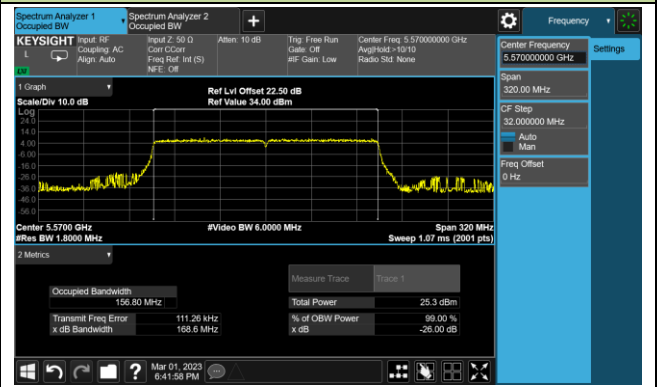


A.3 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2023-03-01		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	18Mbps	149	5745	15.13	≥0.5
11a	18Mbps	157	5785	15.14	≥0.5
11a	18Mbps	165	5825	15.10	≥0.5
11ac-VHT20	MCS2	149	5745	16.81	≥0.5
11ac-VHT20	MCS2	157	5785	15.12	≥0.5
11ac-VHT20	MCS2	165	5825	15.99	≥0.5
11ac-VHT40	MCS2	151	5755	33.82	≥0.5
11ac-VHT40	MCS2	159	5795	35.20	≥0.5
11ac-VHT80	MCS2	155	5775	71.36	≥0.5
11ax-HE20	MCS3	149	5745	18.02	≥0.5
11ax-HE20	MCS3	157	5785	16.50	≥0.5
11ax-HE20	MCS3	165	5825	18.82	≥0.5
11ax-HE40	MCS3	151	5755	36.96	≥0.5
11ax-HE40	MCS3	159	5795	35.85	≥0.5
11ax-HE80	MCS3	155	5775	72.61	≥0.5

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

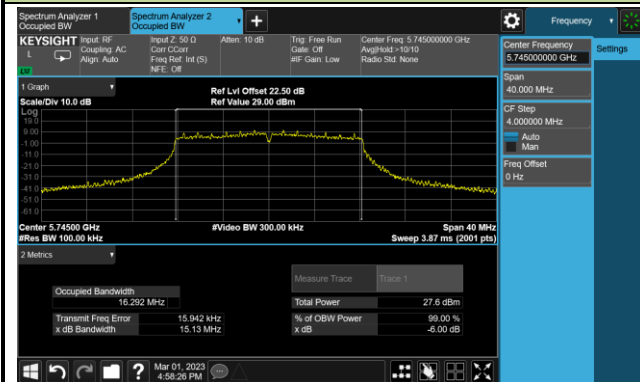

Channel 157 (5785MHz)

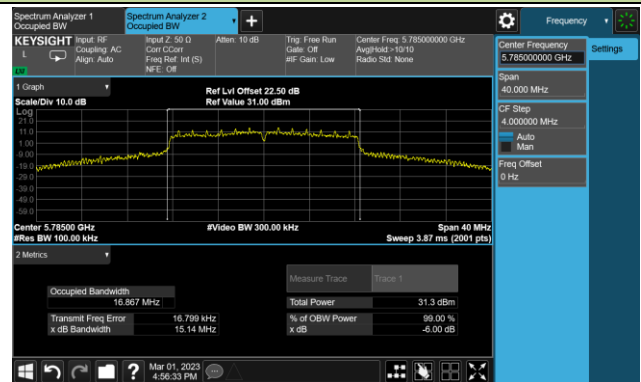


Channel 165 (5825MHz)

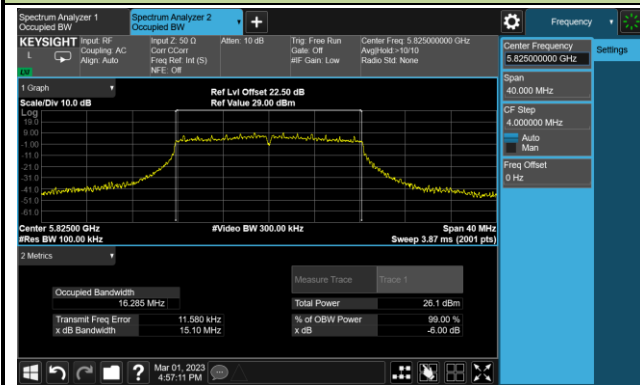


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

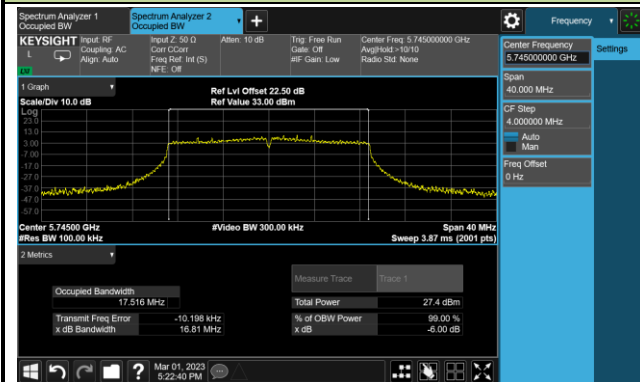

Channel 157 (5785MHz)

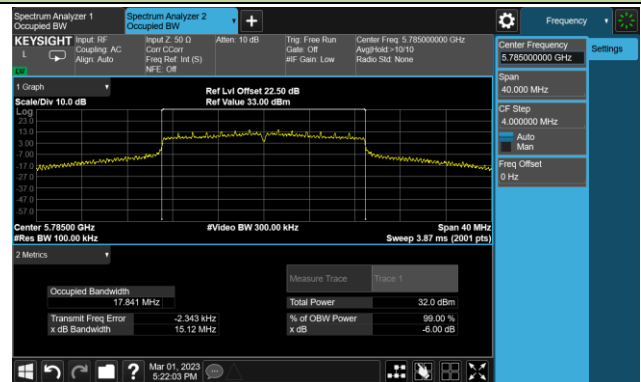


Channel 165 (5825MHz)

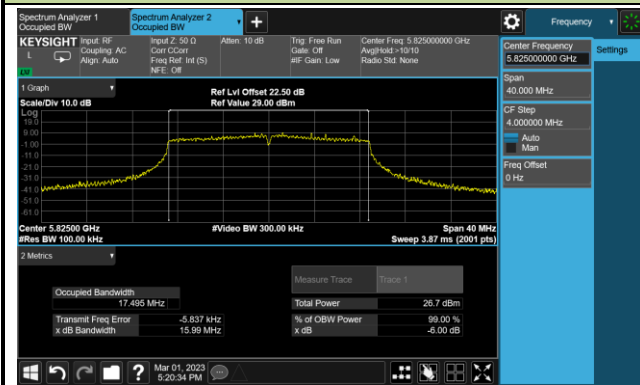



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

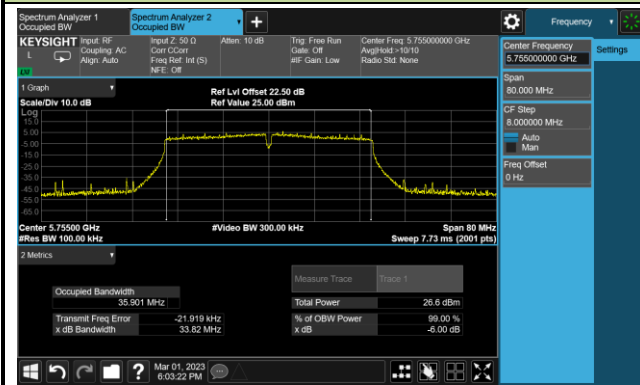


Channel 159 (5795MHz)

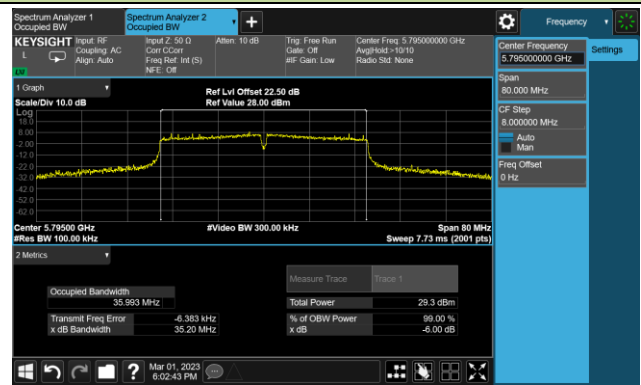

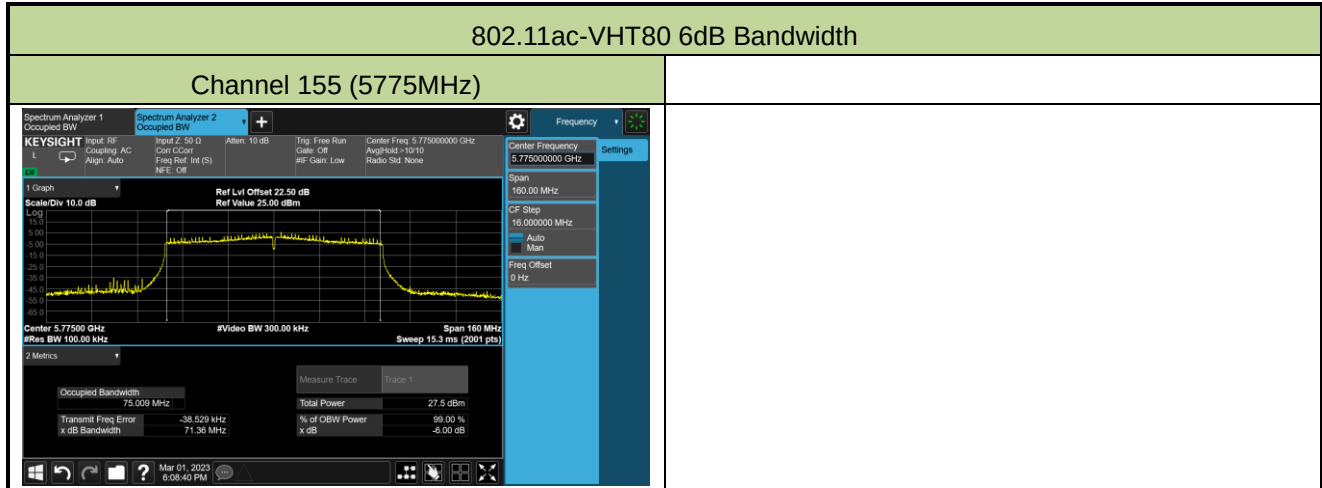


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

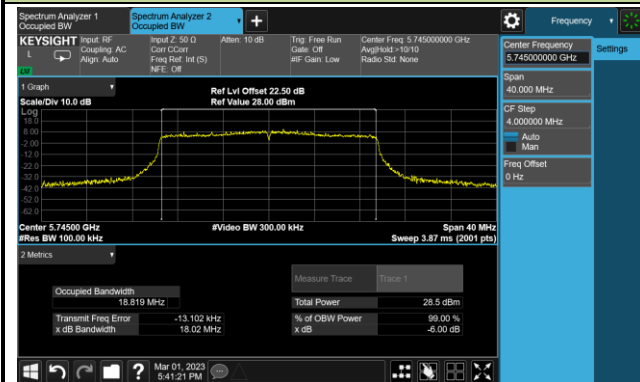

Channel 157 (5785MHz)

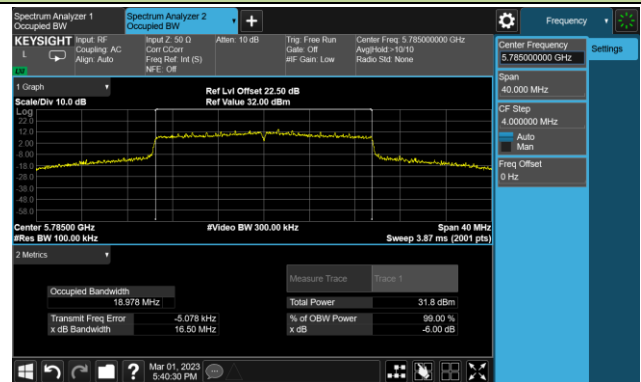


Channel 165 (5825MHz)

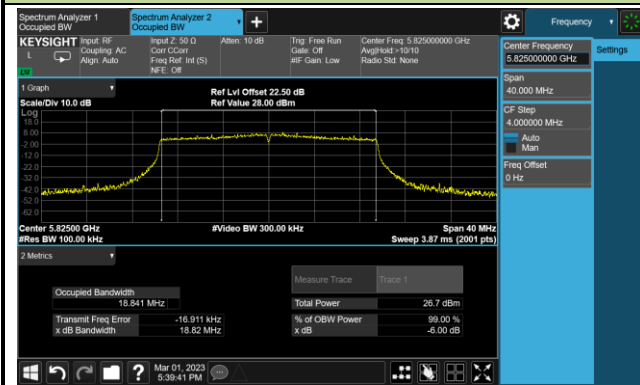



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

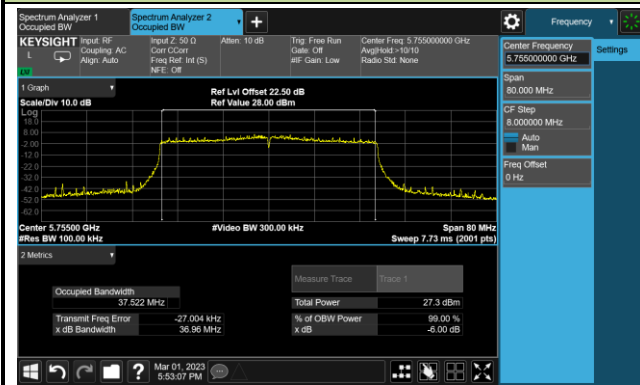

Channel 159 (5795MHz)

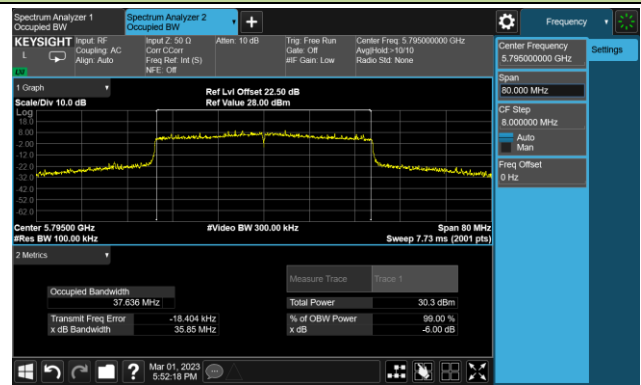

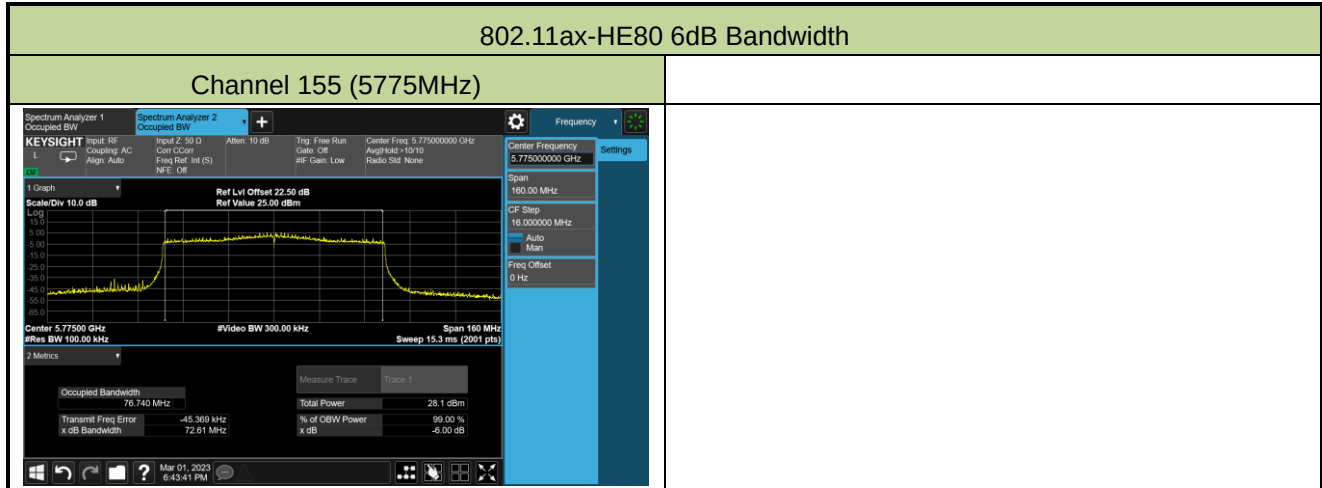

A.4 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2023-02-23		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11a	18Mbps	36	5180	23.12	23.09	26.12	≤ 30.00
11a	18Mbps	44	5220	23.70	23.53	26.63	≤ 30.00
11a	18Mbps	48	5240	23.21	23.88	26.57	≤ 30.00
11a	18Mbps	52	5260	16.70	17.84	20.32	≤ 23.98
11a	18Mbps	60	5300	16.62	17.71	20.21	≤ 23.98
11a	18Mbps	64	5320	16.41	17.79	20.16	≤ 23.98
11a	18Mbps	100	5500	17.31	17.13	20.23	≤ 23.98
11a	18Mbps	116	5580	17.19	16.94	20.08	≤ 23.98
11a	18Mbps	140	5700	17.03	17.78	20.43	≤ 23.98
11a	18Mbps	144	5720	16.97	17.72	20.37	≤ 22.52
11a	18Mbps	149	5745	20.65	20.84	23.76	≤ 30.00
11a	18Mbps	157	5785	24.23	24.56	27.41	≤ 30.00
11a	18Mbps	165	5825	19.12	20.14	22.67	≤ 30.00
11ac-VHT20	MCS2	36	5180	23.26	23.24	26.26	≤ 30.00
11ac-VHT20	MCS2	44	5220	23.94	24.71	27.35	≤ 30.00
11ac-VHT20	MCS2	48	5240	24.14	24.79	27.49	≤ 30.00
11ac-VHT20	MCS2	52	5260	17.40	18.53	21.01	≤ 23.98
11ac-VHT20	MCS2	60	5300	17.33	18.64	21.04	≤ 23.98
11ac-VHT20	MCS2	64	5320	17.32	18.52	20.97	≤ 23.98
11ac-VHT20	MCS2	100	5500	18.14	18.21	21.19	≤ 23.98
11ac-VHT20	MCS2	116	5580	18.34	18.01	21.19	≤ 23.98
11ac-VHT20	MCS2	140	5700	17.80	19.03	21.47	≤ 23.98
11ac-VHT20	MCS2	144	5720	17.95	18.67	21.34	≤ 22.68
11ac-VHT20	MCS2	149	5745	20.52	20.89	23.72	≤ 30.00
11ac-VHT20	MCS2	157	5785	24.46	24.48	27.48	≤ 30.00
11ac-VHT20	MCS2	165	5825	19.62	20.41	23.04	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11ac-VHT40	MCS2	38	5190	22.03	21.89	24.97	≤ 30.00
11ac-VHT40	MCS2	46	5230	24.44	24.80	27.63	≤ 30.00
11ac-VHT40	MCS2	54	5270	19.48	20.91	23.26	≤ 23.98
11ac-VHT40	MCS2	62	5310	17.64	18.56	21.13	≤ 23.98
11ac-VHT40	MCS2	102	5510	20.53	20.76	23.66	≤ 23.98
11ac-VHT40	MCS2	110	5550	20.54	20.40	23.48	≤ 23.98
11ac-VHT40	MCS2	134	5670	16.23	16.55	19.40	≤ 23.98
11ac-VHT40	MCS2	142	5710	20.44	21.09	23.79	≤ 23.98
11ac-VHT40	MCS2	151	5755	19.25	19.57	22.42	≤ 30.00
11ac-VHT40	MCS2	159	5795	22.80	22.71	25.77	≤ 30.00
11ac-VHT80	MCS2	42	5210	21.10	21.38	24.25	≤ 30.00
11ac-VHT80	MCS2	58	5290	18.69	20.12	22.47	≤ 23.98
11ac-VHT80	MCS2	106	5530	20.71	20.45	23.59	≤ 23.98
11ac-VHT80	MCS2	122	5610	20.78	20.51	23.66	≤ 23.98
11ac-VHT80	MCS2	138	5690	20.39	21.13	23.79	≤ 23.98
11ac-VHT80	MCS2	155	5775	19.88	20.01	22.96	≤ 30.00
11ac-VHT160	MCS5	50	5250	19.03	19.76	22.42	≤ 23.98
11ac-VHT160	MCS5	114	5570	16.21	16.34	19.29	≤ 23.98
11ax-HE20	MCS3	36	5180	23.02	22.65	25.85	≤ 30.00
11ax-HE20	MCS3	44	5220	24.09	24.53	27.33	≤ 30.00
11ax-HE20	MCS3	48	5240	24.34	24.89	27.63	≤ 30.00
11ax-HE20	MCS3	52	5260	17.38	18.51	20.99	≤ 23.98
11ax-HE20	MCS3	60	5300	17.39	18.44	20.96	≤ 23.98
11ax-HE20	MCS3	64	5320	17.26	18.47	20.92	≤ 23.98
11ax-HE20	MCS3	100	5500	18.79	18.48	21.65	≤ 23.98
11ax-HE20	MCS3	116	5580	18.16	17.89	21.04	≤ 23.98
11ax-HE20	MCS3	140	5700	17.91	18.72	21.34	≤ 23.98
11ax-HE20	MCS3	144	5720	17.72	18.58	21.18	≤ 22.84
11ax-HE20	MCS3	149	5745	20.07	20.25	23.17	≤ 30.00
11ax-HE20	MCS3	157	5785	23.95	23.88	26.93	≤ 30.00
11ax-HE20	MCS3	165	5825	18.68	18.82	21.76	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11ax-HE40	MCS3	38	5190	20.91	21.24	24.09	≤ 30.00
11ax-HE40	MCS3	46	5230	24.38	24.66	27.53	≤ 30.00
11ax-HE40	MCS3	54	5270	19.59	21.14	23.44	≤ 23.98
11ax-HE40	MCS3	62	5310	16.88	18.21	20.61	≤ 23.98
11ax-HE40	MCS3	102	5510	20.51	20.61	23.57	≤ 23.98
11ax-HE40	MCS3	110	5550	20.68	20.26	23.49	≤ 23.98
11ax-HE40	MCS3	134	5670	16.82	16.93	19.89	≤ 23.98
11ax-HE40	MCS3	142	5710	20.38	21.05	23.74	≤ 23.98
11ax-HE40	MCS3	151	5755	18.61	19.12	21.88	≤ 30.00
11ax-HE40	MCS3	159	5795	22.86	22.61	25.75	≤ 30.00
11ax-HE80	MCS3	42	5210	21.16	21.54	24.36	≤ 30.00
11ax-HE80	MCS3	58	5290	18.32	19.57	22.00	≤ 23.98
11ax-HE80	MCS3	106	5530	20.76	20.56	23.67	≤ 23.98
11ax-HE80	MCS3	122	5610	20.89	20.62	23.77	≤ 23.98
11ax-HE80	MCS3	138	5690	20.35	21.11	23.76	≤ 23.98
11ax-HE80	MCS3	155	5775	19.45	19.60	22.54	≤ 30.00
11ax-HE160	MCS5	50	5250	18.86	19.44	22.17	≤ 23.98
11ax-HE160	MCS5	114	5570	15.78	15.64	18.72	≤ 23.98

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: For 5720MHz, Average Power Limit = $11 + 10 \cdot \log(5 + 26 \text{dBc} / 2)$.

A.5 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2023-02-22~2023-02-23		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11a	18Mbps	36	5180	12.88	12.73	97.12	15.95	16.70
11a	18Mbps	44	5220	13.46	13.17	97.12	16.45	16.70
11a	18Mbps	48	5240	13.15	13.66	97.12	16.55	16.70
11a	18Mbps	52	5260	6.54	7.47	97.12	10.17	10.70
11a	18Mbps	60	5300	6.40	7.68	97.12	10.22	10.70
11a	18Mbps	64	5320	6.44	7.60	97.12	10.20	10.70
11a	18Mbps	100	5500	7.11	6.73	97.12	10.06	10.70
11a	18Mbps	116	5580	7.43	6.90	97.12	10.31	10.70
11a	18Mbps	140	5700	6.66	7.53	97.12	10.25	10.70
11a	18Mbps	144	5720	6.51	7.66	97.12	10.26	10.70
11ac-VHT20	MCS2	36	5180	12.78	12.43	96.64	15.77	17.00
11ac-VHT20	MCS2	44	5220	13.67	13.71	96.64	16.85	17.00
11ac-VHT20	MCS2	48	5240	13.38	13.82	96.64	16.76	17.00
11ac-VHT20	MCS2	52	5260	6.83	8.14	96.64	10.70	11.00
11ac-VHT20	MCS2	60	5300	6.74	8.02	96.64	10.58	11.00
11ac-VHT20	MCS2	64	5320	6.75	8.07	96.64	10.62	11.00
11ac-VHT20	MCS2	100	5500	7.30	7.26	96.64	10.44	11.00
11ac-VHT20	MCS2	116	5580	7.52	7.25	96.64	10.55	11.00
11ac-VHT20	MCS2	140	5700	7.16	8.14	96.64	10.84	11.00
11ac-VHT20	MCS2	144	5720	7.13	7.97	96.64	10.73	11.00
11ac-VHT40	MCS2	38	5190	8.14	7.73	94.93	11.18	17.00
11ac-VHT40	MCS2	46	5230	11.26	11.26	94.93	14.50	17.00
11ac-VHT40	MCS2	54	5270	6.12	7.79	94.93	10.27	11.00
11ac-VHT40	MCS2	62	5310	4.01	5.36	94.93	7.97	11.00
11ac-VHT40	MCS2	102	5510	7.19	6.89	94.93	10.28	11.00
11ac-VHT40	MCS2	110	5550	6.96	6.54	94.93	9.99	11.00
11ac-VHT40	MCS2	134	5670	2.51	2.72	94.93	5.86	11.00
11ac-VHT40	MCS2	142	5710	6.47	7.45	94.93	10.23	11.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11ac-VHT80	MCS2	42	5210	5.07	4.66	91.92	8.25	17.00
11ac-VHT80	MCS2	58	5290	2.69	4.24	91.92	6.91	11.00
11ac-VHT80	MCS2	106	5530	4.45	4.32	91.92	7.76	11.00
11ac-VHT80	MCS2	122	5610	4.51	4.65	91.92	7.96	11.00
11ac-VHT80	MCS2	138	5690	4.08	5.22	91.92	8.06	11.00
11ac-VHT160	MCS5	50	5250	-2.39	-1.34	91.41	1.56	11.00
11ac-VHT160	MCS5	114	5570	-5.20	-5.09	91.41	-1.74	11.00
11ax-HE20	MCS3	36	5180	10.79	10.85	95.87	14.01	17.00
11ax-HE20	MCS3	44	5220	12.99	13.16	95.87	16.27	17.00
11ax-HE20	MCS3	48	5240	13.03	13.91	95.87	16.68	17.00
11ax-HE20	MCS3	52	5260	6.64	7.91	95.87	10.52	11.00
11ax-HE20	MCS3	60	5300	6.54	7.88	95.87	10.45	11.00
11ax-HE20	MCS3	64	5320	6.49	7.75	95.87	10.36	11.00
11ax-HE20	MCS3	100	5500	7.59	7.56	95.87	10.77	11.00
11ax-HE20	MCS3	116	5580	7.43	7.13	95.87	10.48	11.00
11ax-HE20	MCS3	140	5700	6.90	7.88	95.87	10.61	11.00
11ax-HE20	MCS3	144	5720	6.83	7.71	95.87	10.48	11.00
11ax-HE40	MCS3	38	5190	7.23	6.93	88.09	10.64	17.00
11ax-HE40	MCS3	46	5230	10.50	11.26	88.09	14.46	17.00
11ax-HE40	MCS3	54	5270	5.59	7.43	88.09	10.17	11.00
11ax-HE40	MCS3	62	5310	3.15	4.46	88.09	7.42	11.00
11ax-HE40	MCS3	102	5510	6.68	6.82	88.09	10.31	11.00
11ax-HE40	MCS3	110	5550	6.82	6.34	88.09	10.15	11.00
11ax-HE40	MCS3	134	5670	2.60	3.22	88.09	6.49	11.00
11ax-HE40	MCS3	142	5710	6.42	7.29	88.09	10.44	11.00
11ax-HE80	MCS3	42	5210	4.77	5.16	93.41	8.28	17.00
11ax-HE80	MCS3	58	5290	2.31	3.33	93.41	6.15	11.00
11ax-HE80	MCS3	106	5530	4.43	4.30	93.41	7.67	11.00
11ax-HE80	MCS3	122	5610	4.80	4.35	93.41	7.89	11.00
11ax-HE80	MCS3	138	5690	4.14	5.14	93.41	7.97	11.00
11ax-HE160	MCS5	50	5250	-2.79	-1.64	92.43	1.18	11.00
11ax-HE160	MCS5	114	5570	-5.72	-6.09	92.43	-2.55	11.00

Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)} + 10^{(\text{Ant 3 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle $\geq 98\%$, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2$

$\text{AVGPSD}/10) + 10^{(\text{Ant } 3 \text{ AVGPSD}/10)}\}$.

Note 2: For 802.11a-NII-1 band, PSD Limit (dBm/MHz) = $17 - (6.3 - 6) = 16.7 \text{ dBm/MHz}$.

For 802.11a-NII-2a/-2c bands, PSD Limit (dBm/MHz) = $11 - (6.3 - 6) = 10.7 \text{ dBm/MHz}$.

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2023-02-22~2023-02-23		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510KHz)		Duty Cycle (%)	Total PSD (dBm/ 510KHz)	PSD Limit (dBm/ 500KHz)
				Ant 0	Ant 1			
11a	18Mbps	149	5745	7.74	7.87	97.12	10.94	≤ 29.70
11a	18Mbps	157	5785	10.79	11.42	97.12	14.25	≤ 29.70
11a	18Mbps	165	5825	6.19	6.68	97.12	9.58	≤ 29.70
11ac-VHT20	MCS2	149	5745	7.13	7.41	96.64	10.43	≤ 30.00
11ac-VHT20	MCS2	157	5785	10.64	10.62	96.64	13.79	≤ 30.00
11ac-VHT20	MCS2	165	5825	6.02	6.86	96.64	9.62	≤ 30.00
11ac-VHT40	MCS2	151	5755	2.92	3.38	94.93	6.40	≤ 30.00
11ac-VHT40	MCS2	159	5795	6.63	6.33	94.93	9.72	≤ 30.00
11ac-VHT80	MCS2	155	5775	0.99	1.18	91.92	4.46	≤ 30.00
11ax-HE20	MCS3	149	5745	6.45	6.43	95.87	9.64	≤ 30.00
11ax-HE20	MCS3	157	5785	10.47	10.11	95.87	13.49	≤ 30.00
11ax-HE20	MCS3	165	5825	4.60	5.31	95.87	8.16	≤ 30.00
11ax-HE40	MCS3	151	5755	2.33	2.45	88.09	5.95	≤ 30.00
11ax-HE40	MCS3	159	5795	6.07	6.19	88.09	9.69	≤ 30.00
11ax-HE80	MCS3	155	5775	0.91	0.48	93.41	4.01	≤ 30.00


Note 1:

When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} \}$
+ $10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} \}$.

Note 2: For 802.11a-NII-3 band, PSD Limit (dBm/500KHz) = 30 - (6.3 - 6) = 29.7dBm/500kHz


Channel 44 (5220MHz)

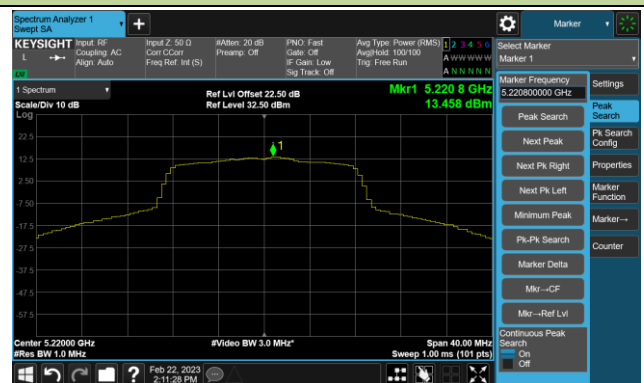


Channel 52 (5260MHz)



Channel 64 (5320MHz)

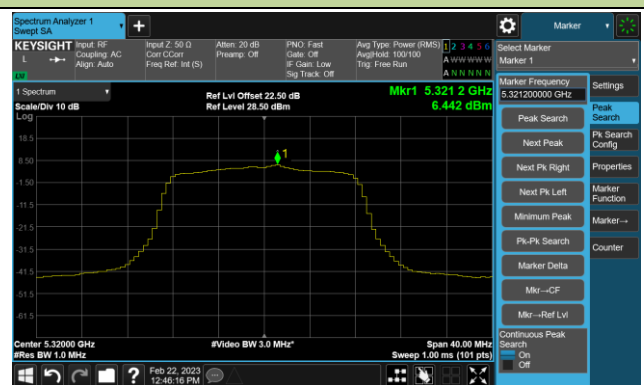


Channel 116 (5580MHz)

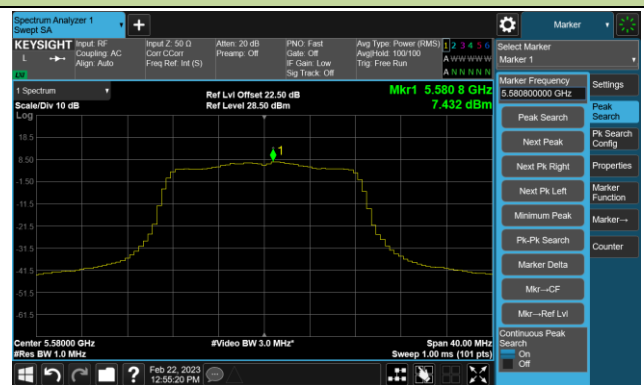


802.11a Power Spectral Density- Ant 0


Channel 140 (5700MHz)

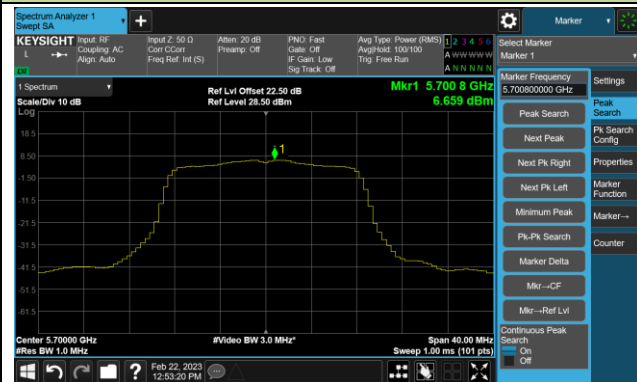


Channel 144(5720MHz)

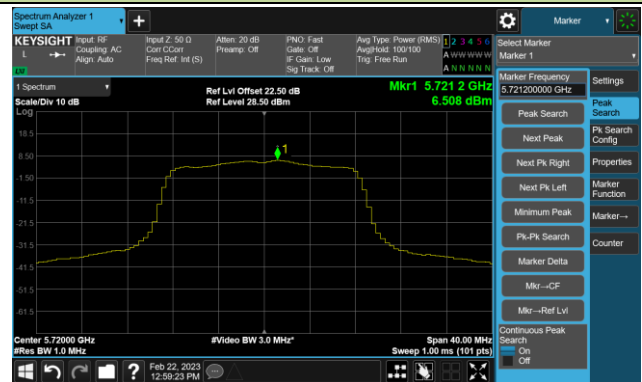


Channel 149 (5745MHz)

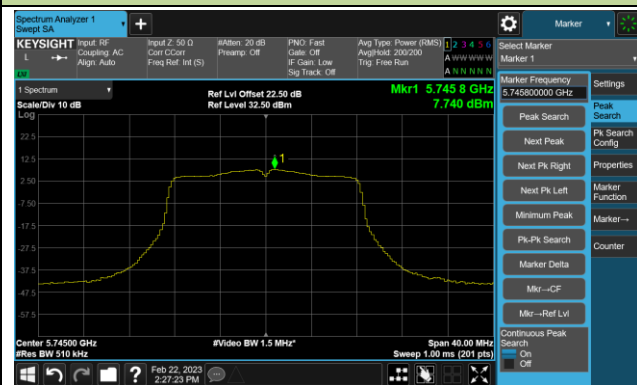

Channel 157 (5785MHz)

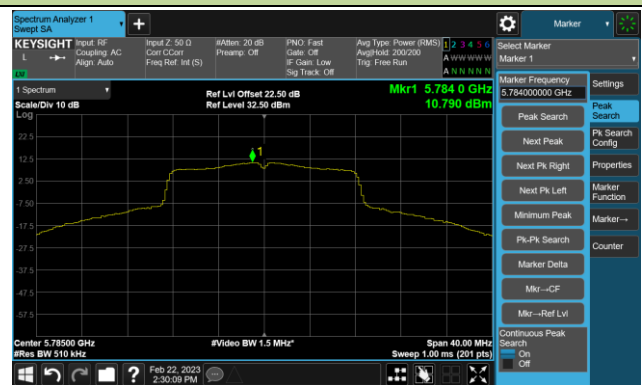

Channel 165 (5825MHz)

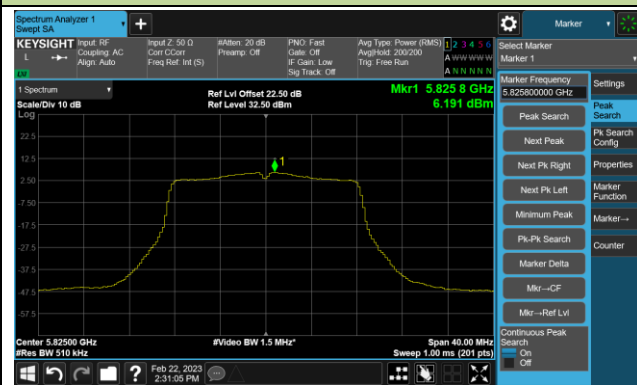


802.11ac-VHT20 Power Spectral Density- Ant 0

Channel 36 (5180MHz)



Channel 44 (5220MHz)

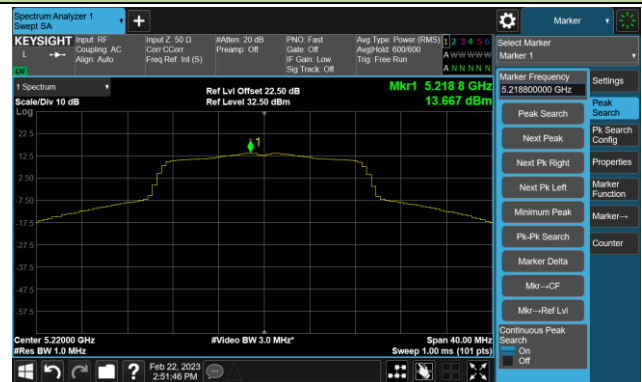


Channel 48 (5240MHz)




Channel 52 (5260MHz)




Channel 60 (5300MHz)

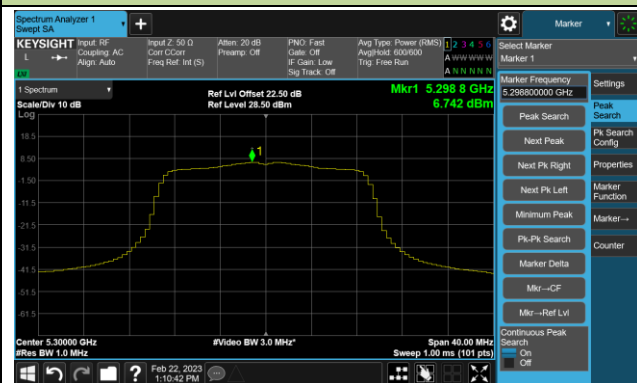


Channel 64 (5320MHz)

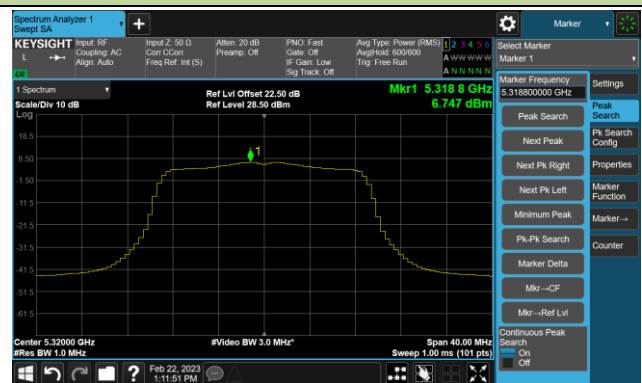

Channel 100 (5500MHz)

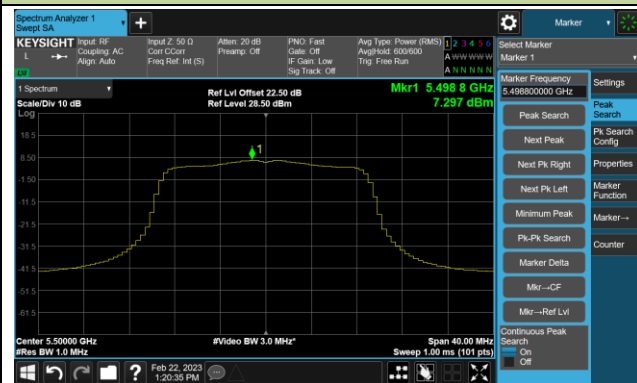


Channel 116 (5580MHz)

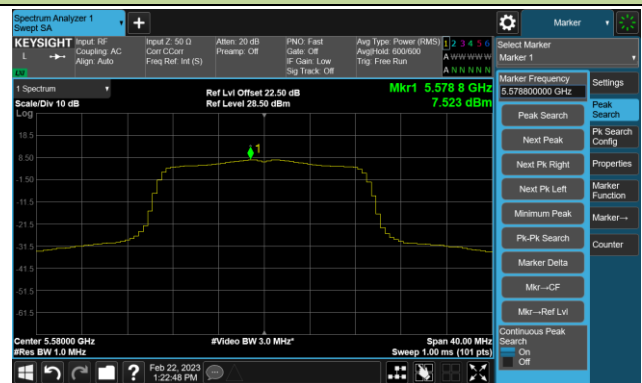


802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 140 (5700MHz)

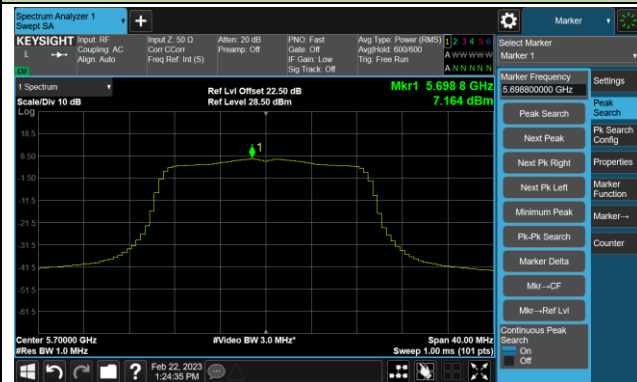


Channel 144(5720MHz)

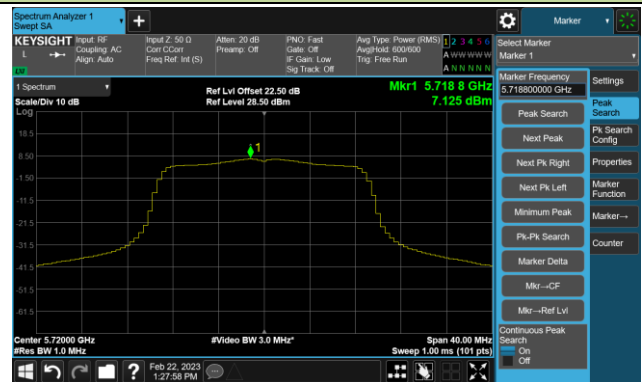


Channel 149 (5745MHz)

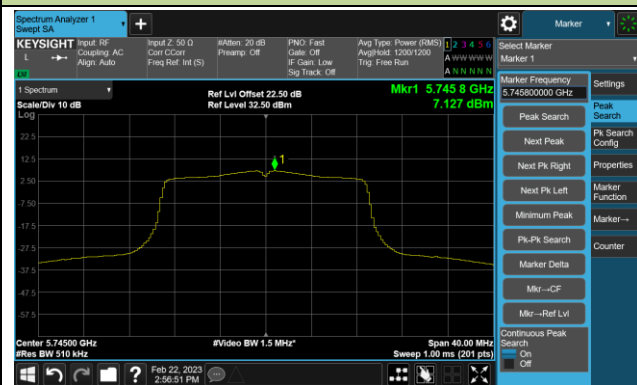

Channel 157 (5785MHz)

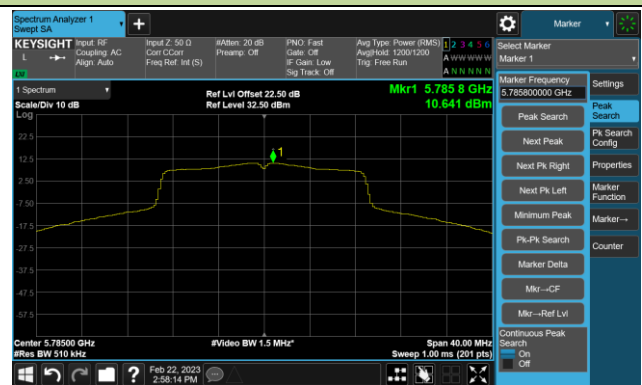


Channel 165 (5825MHz)

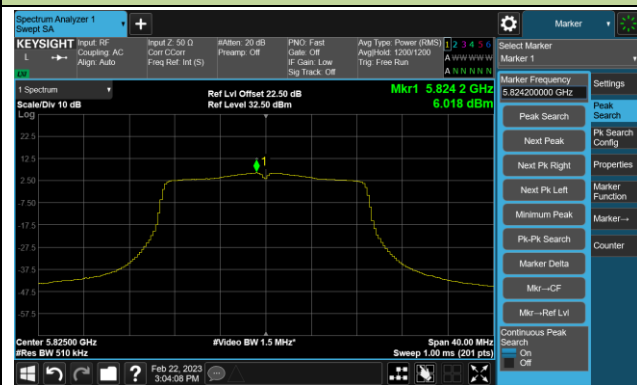


802.11ac-VHT40 Power Spectral Density- Ant 0


Channel 38 (5190MHz)

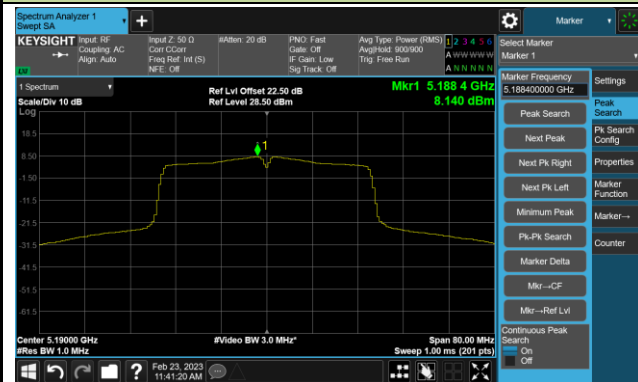


Channel 46 (5230MHz)

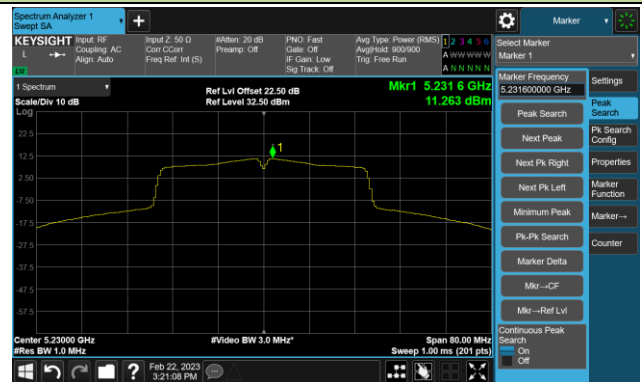


Channel 54 (5270MHz)

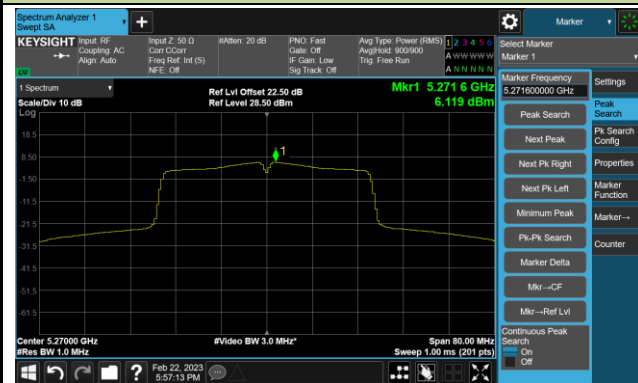


Channel 62 (5310MHz)

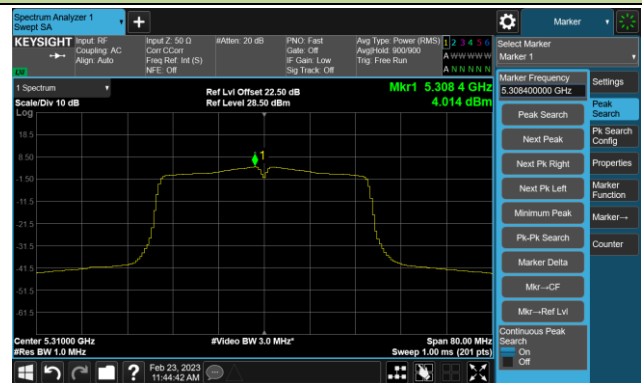


Channel 102 (5510MHz)

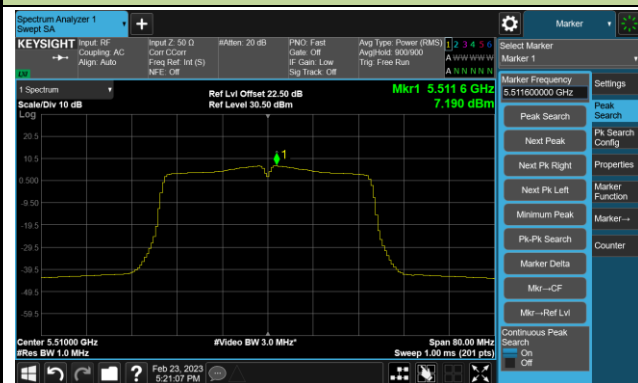


Channel 110 (5550MHz)

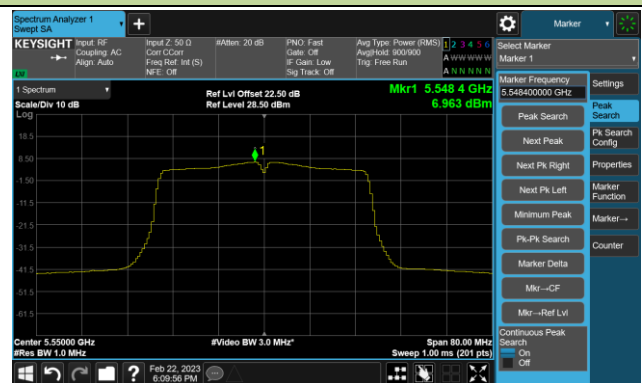

Channel 134 (5670MHz)

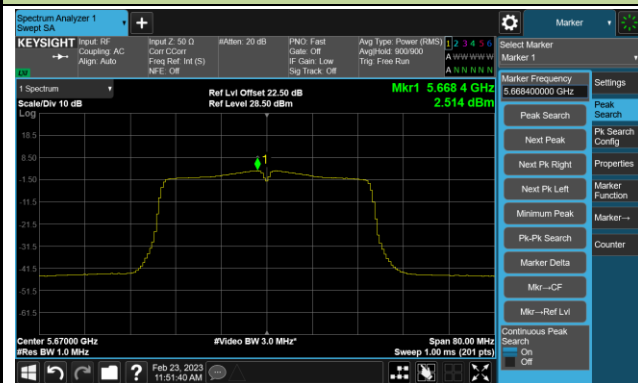


Channel 142(5710MHz)

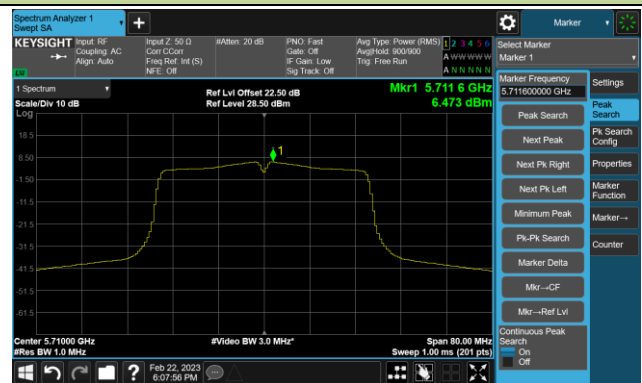


802.11ac-VHT40 Power Spectral Density- Ant 0

Channel 151 (5755MHz)

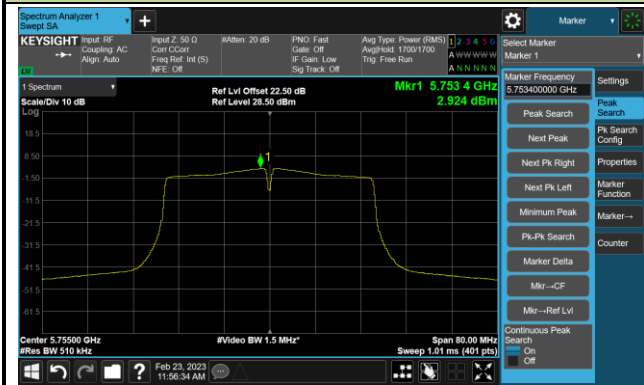


Channel 159 (5795MHz)

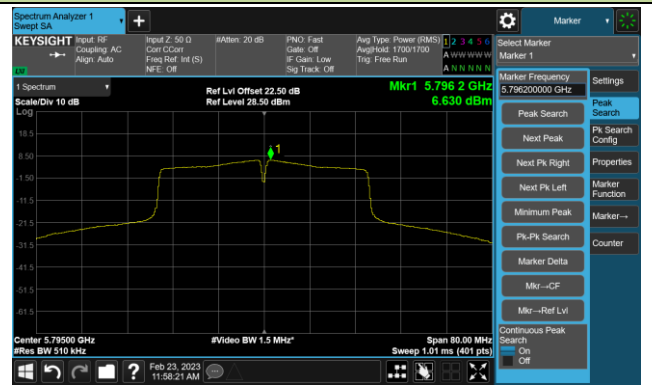


802.11ac-VHT80 Power Spectral Density- Ant 0


Channel 42 (5210MHz)

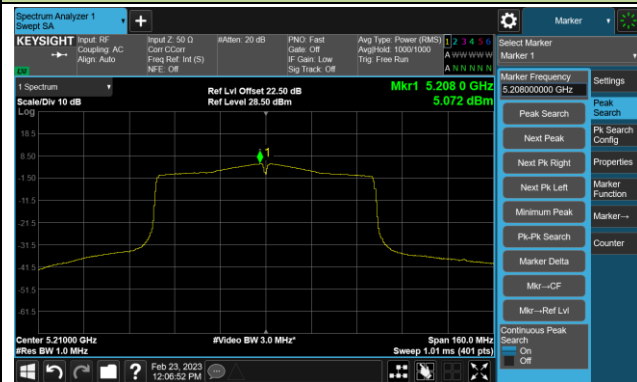


Channel 58 (5290MHz)

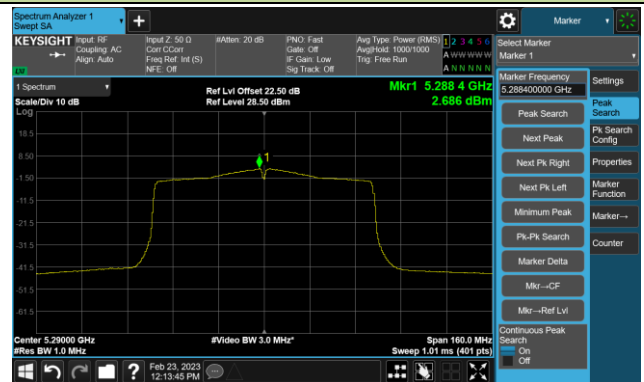


Channel 106 (5530MHz)

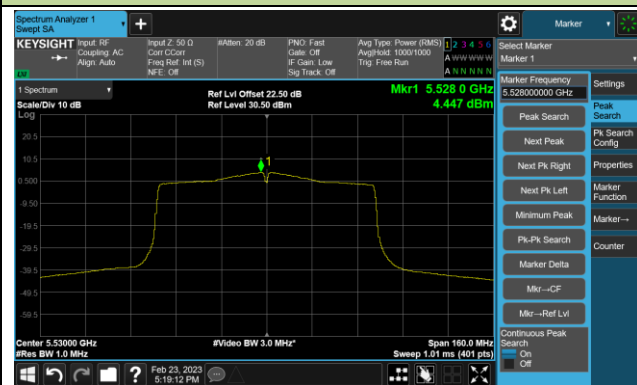


Channel 122 (5610MHz)

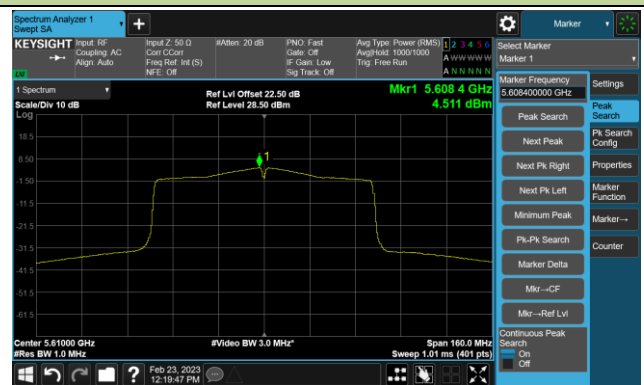

Channel 138 (5690MHz)

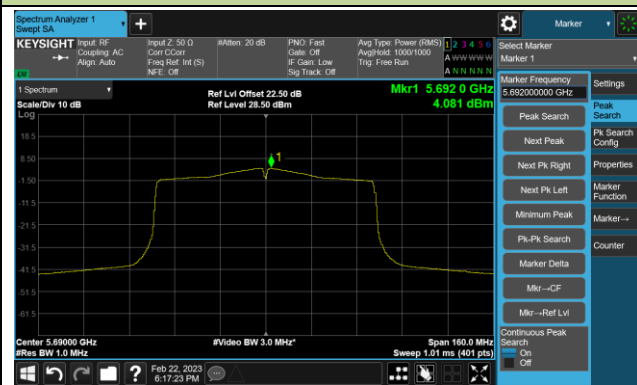


Channel 155 (5775MHz)

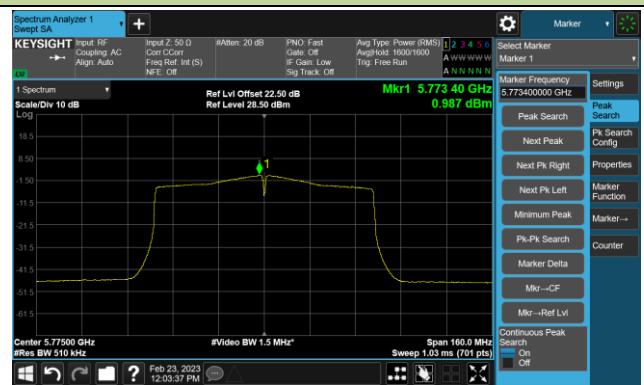


802.11ac-VHT160 Power Spectral Density- Ant 0

Channel 50 (5250MHz)

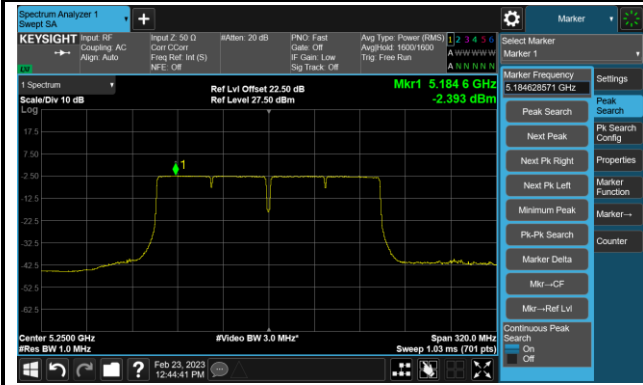


Channel 114 (5570MHz)

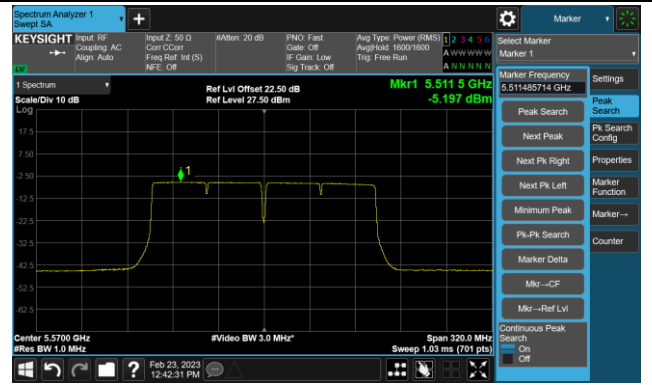

802.11ax-HE20 Power Spectral Density- Ant 0


Channel 36 (5180MHz)

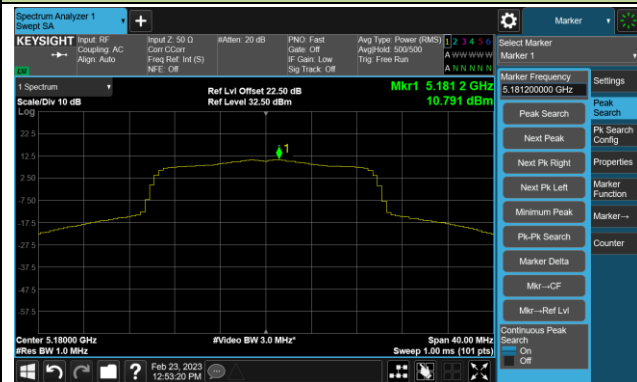


Channel 44 (5220MHz)




Channel 48 (5240MHz)

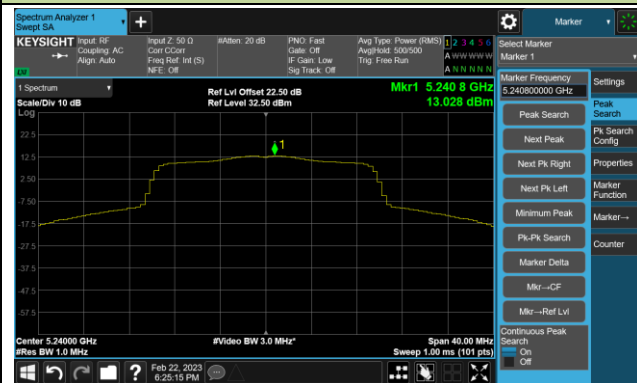


Channel 52 (5260MHz)

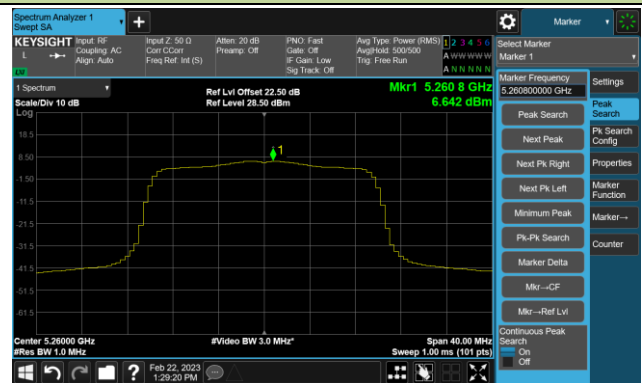


Channel 60 (5300MHz)

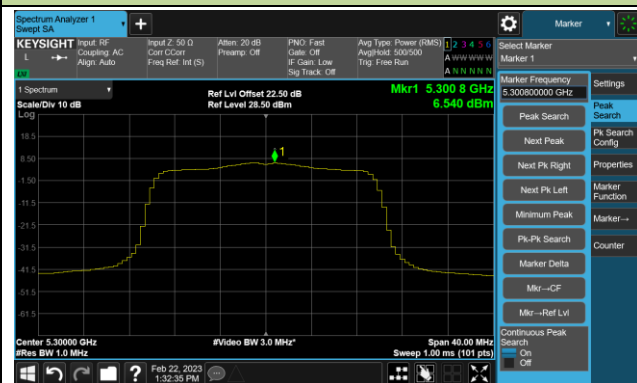


Channel 64 (5320MHz)

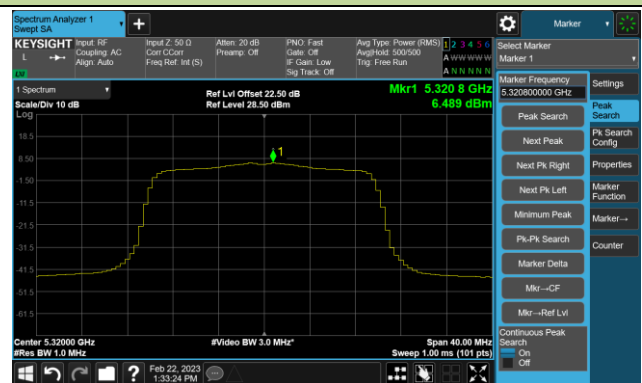

Channel 100 (5500MHz)

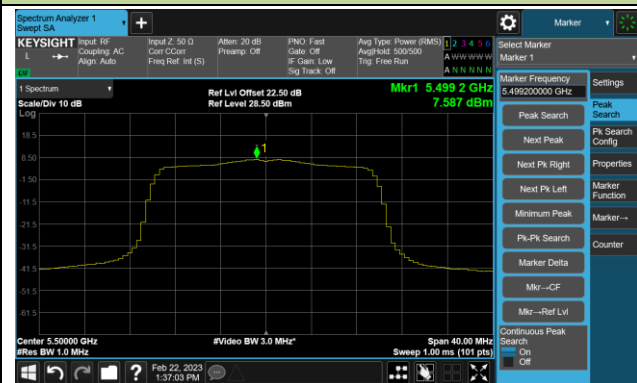

Channel 116 (5580MHz)

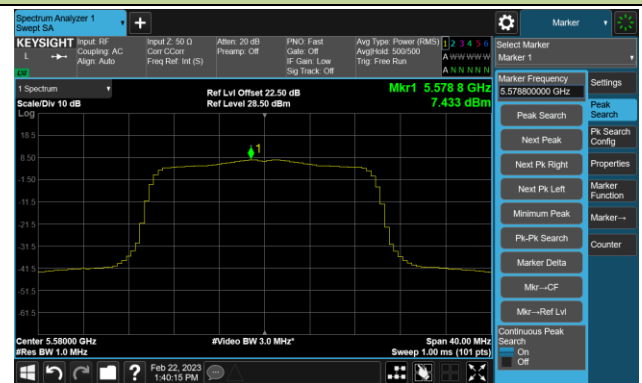

802.11ax-HE20 Power Spectral Density- Ant 0


Channel 140 (5700MHz)




Channel 144(5720MHz)



Channel 149 (5745MHz)

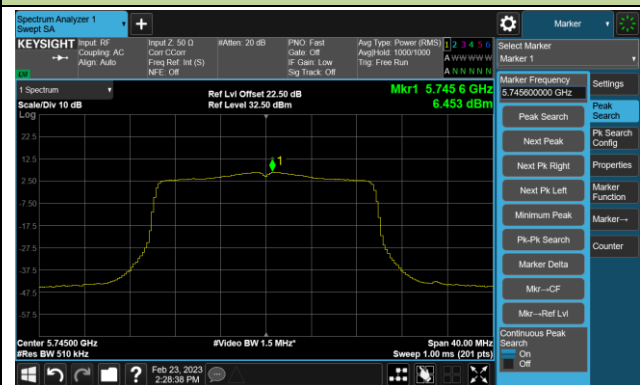

Channel 157 (5785MHz)

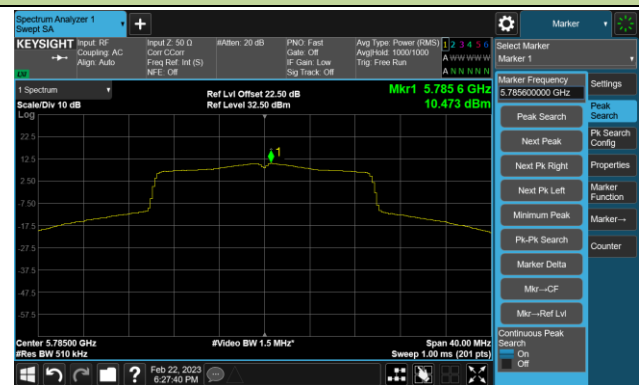

Channel 165 (5825MHz)

