



802.11be-EHT20 26 dB Bandwidth & 99% Bandwidth


Channel 140 (5700 MHz)

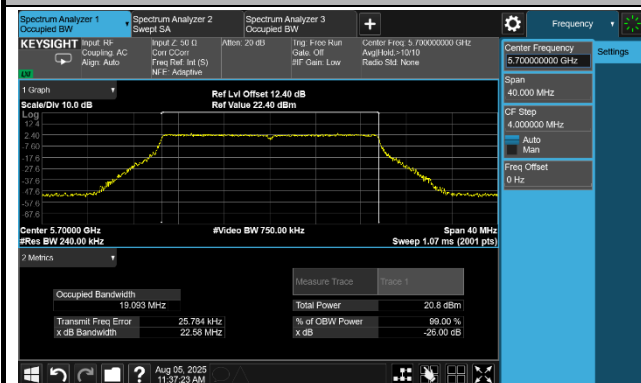


Channel 144(5720 MHz)

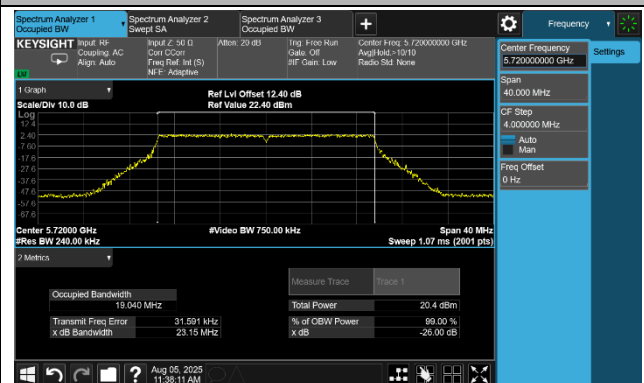


Channel 149 (5745 MHz)

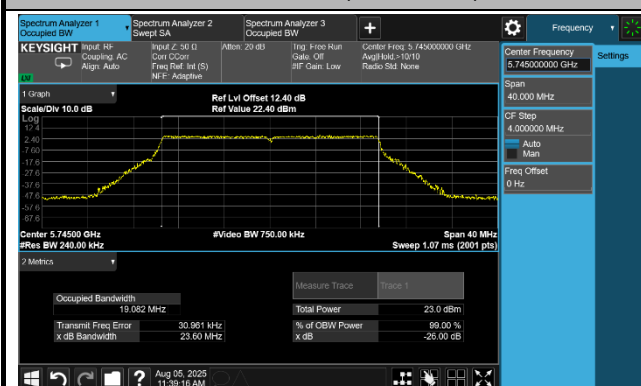

Channel 157 (5785 MHz)

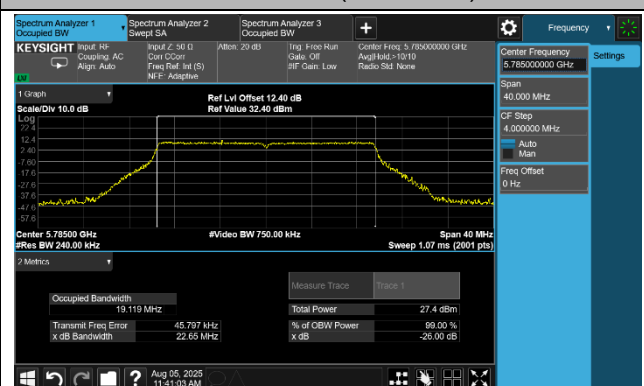


Channel 165 (5825 MHz)

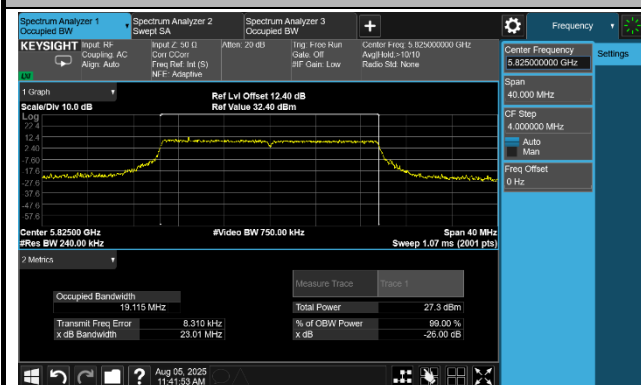


802.11be-EHT40 26 dB Bandwidth & 99% Bandwidth


Channel 38 (5190 MHz)

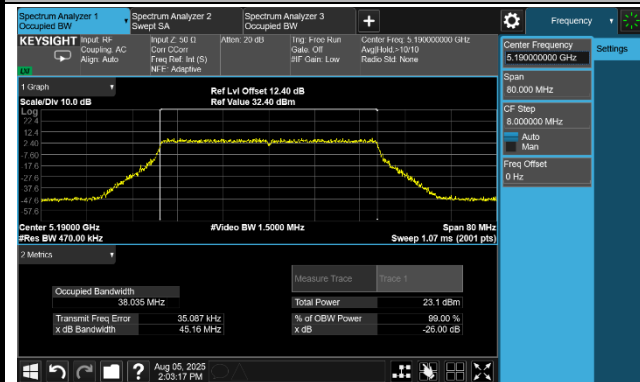


Channel 46 (5230 MHz)

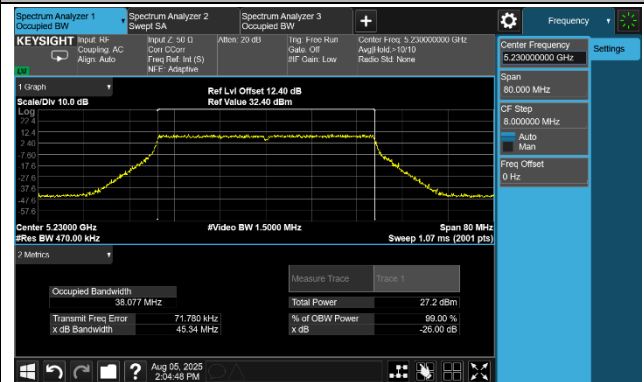


Channel 54 (5270 MHz)

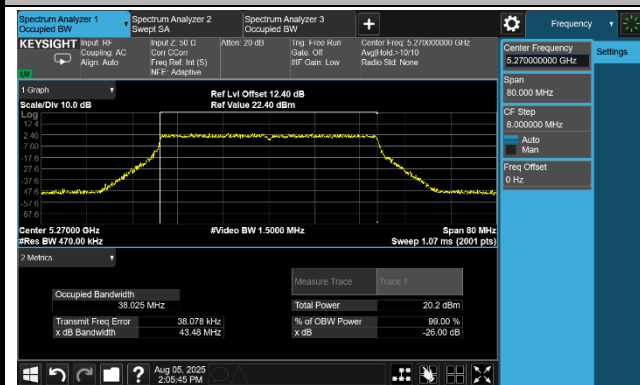


Channel 62 (5310 MHz)

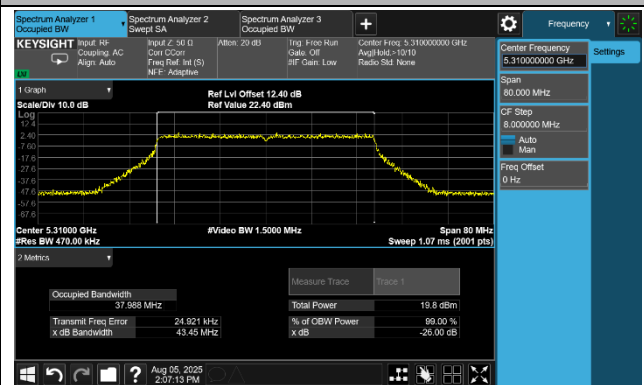


Channel 102 (5510 MHz)

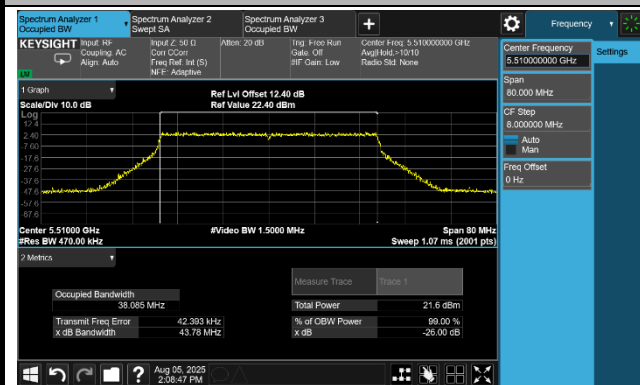


Channel 110 (5550 MHz)

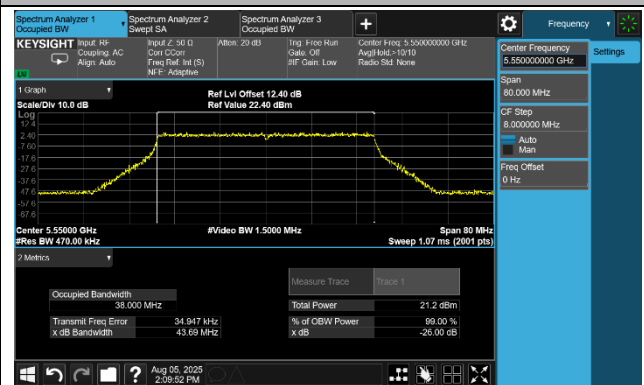


Channel 134 (5670 MHz)

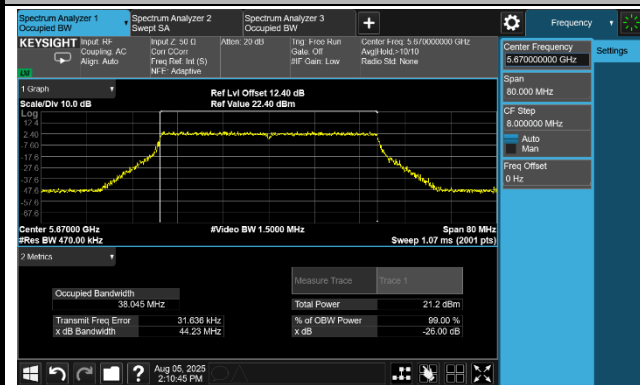


Channel 142(5710 MHz)

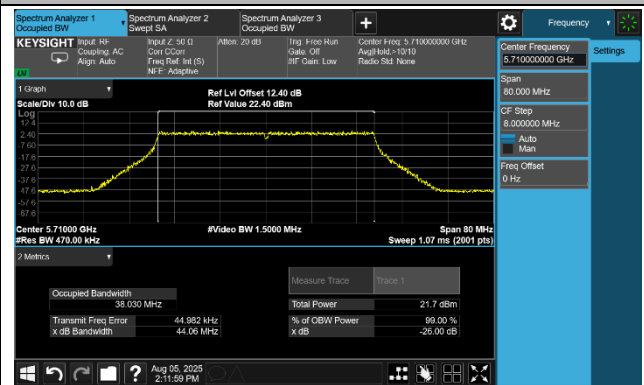

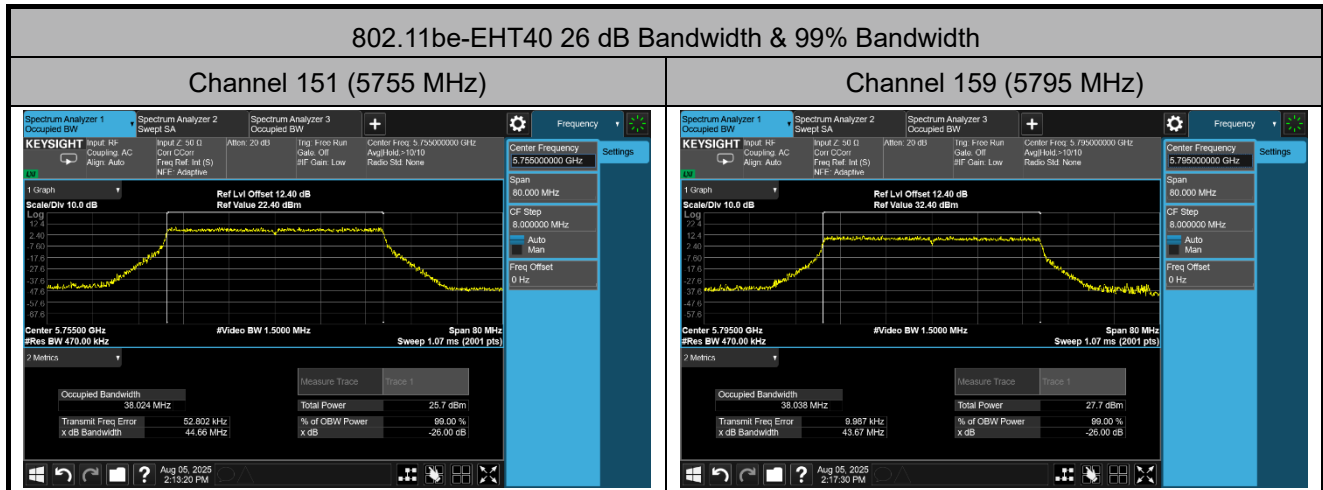


802.11be-EHT80 26 dB Bandwidth & 99% Bandwidth


Channel 42 (5210 MHz)

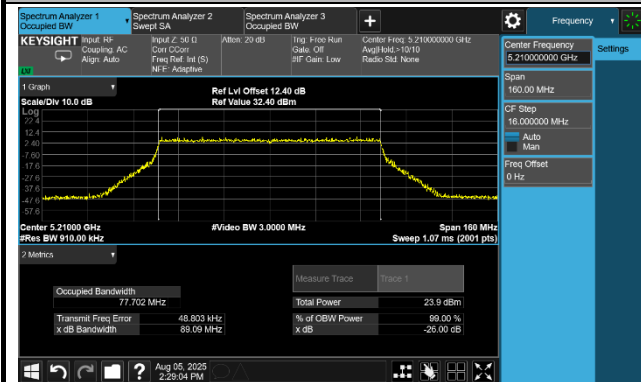


Channel 58 (5290 MHz)

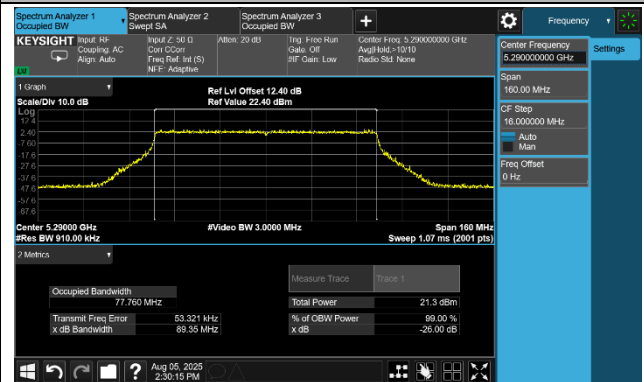


Channel 106 (5530 MHz)

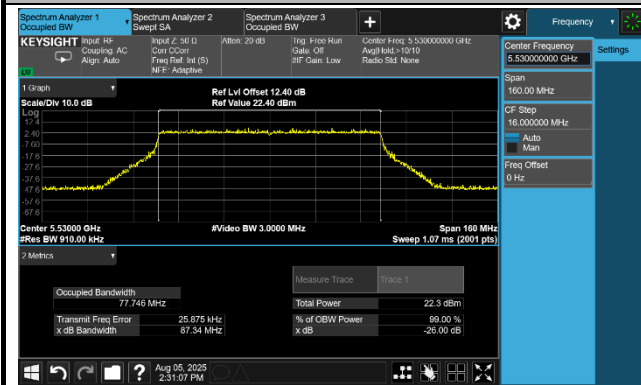


Channel 122 (5610 MHz)

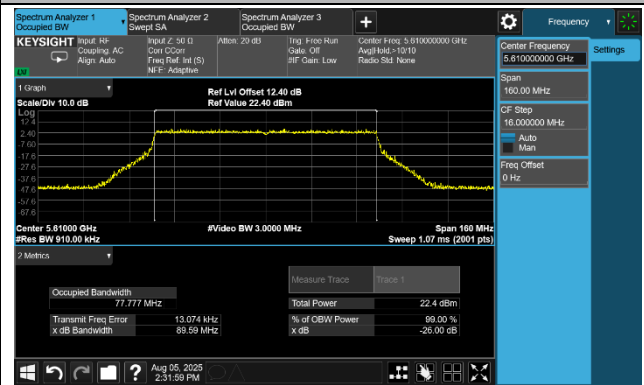


Channel 138 (5690 MHz)

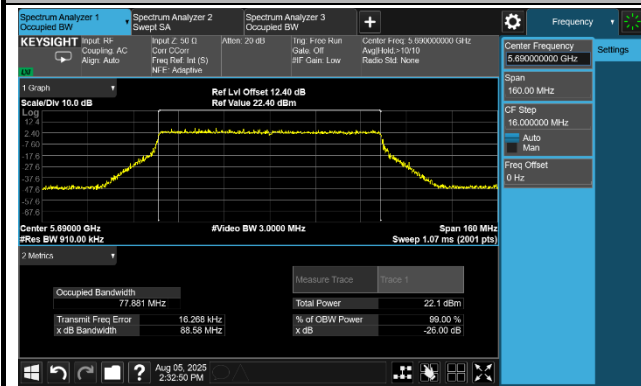

Channel 155 (5775 MHz)

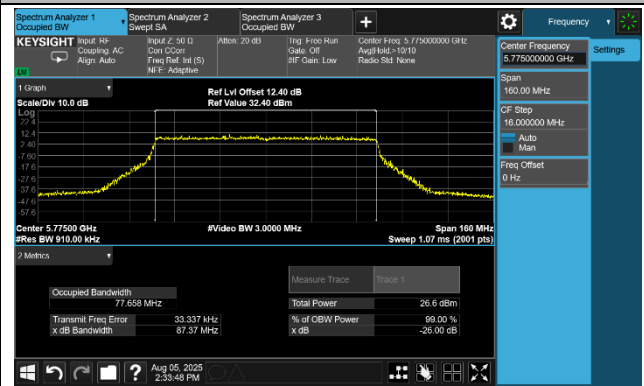

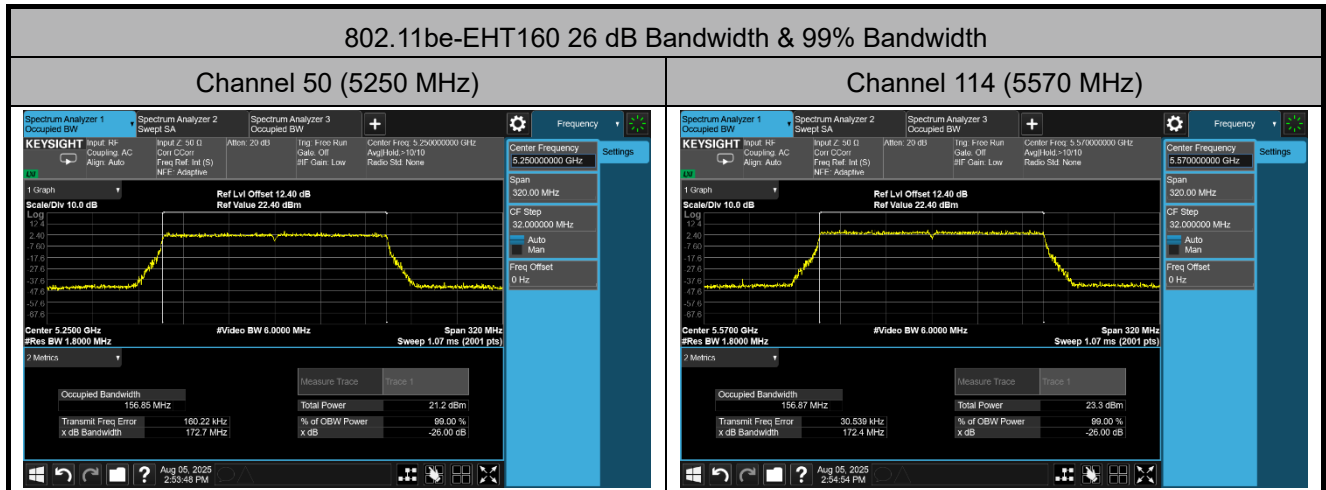


A.3 6 dB Bandwidth Test Result

Tri-band mode


Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-08-05		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
11a	6 Mbps	149	5745	16.36	≥0.5
11a	6 Mbps	157	5785	16.37	≥0.5
11a	6 Mbps	165	5825	16.32	≥0.5
11ac-VHT20	MCS0	149	5745	17.63	≥0.5
11ac-VHT20	MCS0	157	5785	17.62	≥0.5
11ac-VHT20	MCS0	165	5825	17.62	≥0.5
11ac-VHT40	MCS0	151	5755	36.38	≥0.5
11ac-VHT40	MCS0	159	5795	36.39	≥0.5
11ac-VHT80	MCS0	155	5775	76.41	≥0.5
11ax-HE20	MCS0	149	5745	18.96	≥0.5
11ax-HE20	MCS0	157	5785	19.06	≥0.5
11ax-HE20	MCS0	165	5825	19.04	≥0.5
11ax-HE40	MCS0	151	5755	38.23	≥0.5
11ax-HE40	MCS0	159	5795	38.18	≥0.5
11ax-HE80	MCS0	155	5775	78.09	≥0.5
11be-EHT20	MCS0	149	5745	19.04	≥0.5
11be-EHT20	MCS0	157	5785	19.00	≥0.5
11be-EHT20	MCS0	165	5825	19.08	≥0.5
11be-EHT40	MCS0	151	5755	38.10	≥0.5
11be-EHT40	MCS0	159	5795	38.13	≥0.5
11be-EHT80	MCS0	155	5775	78.15	≥0.5

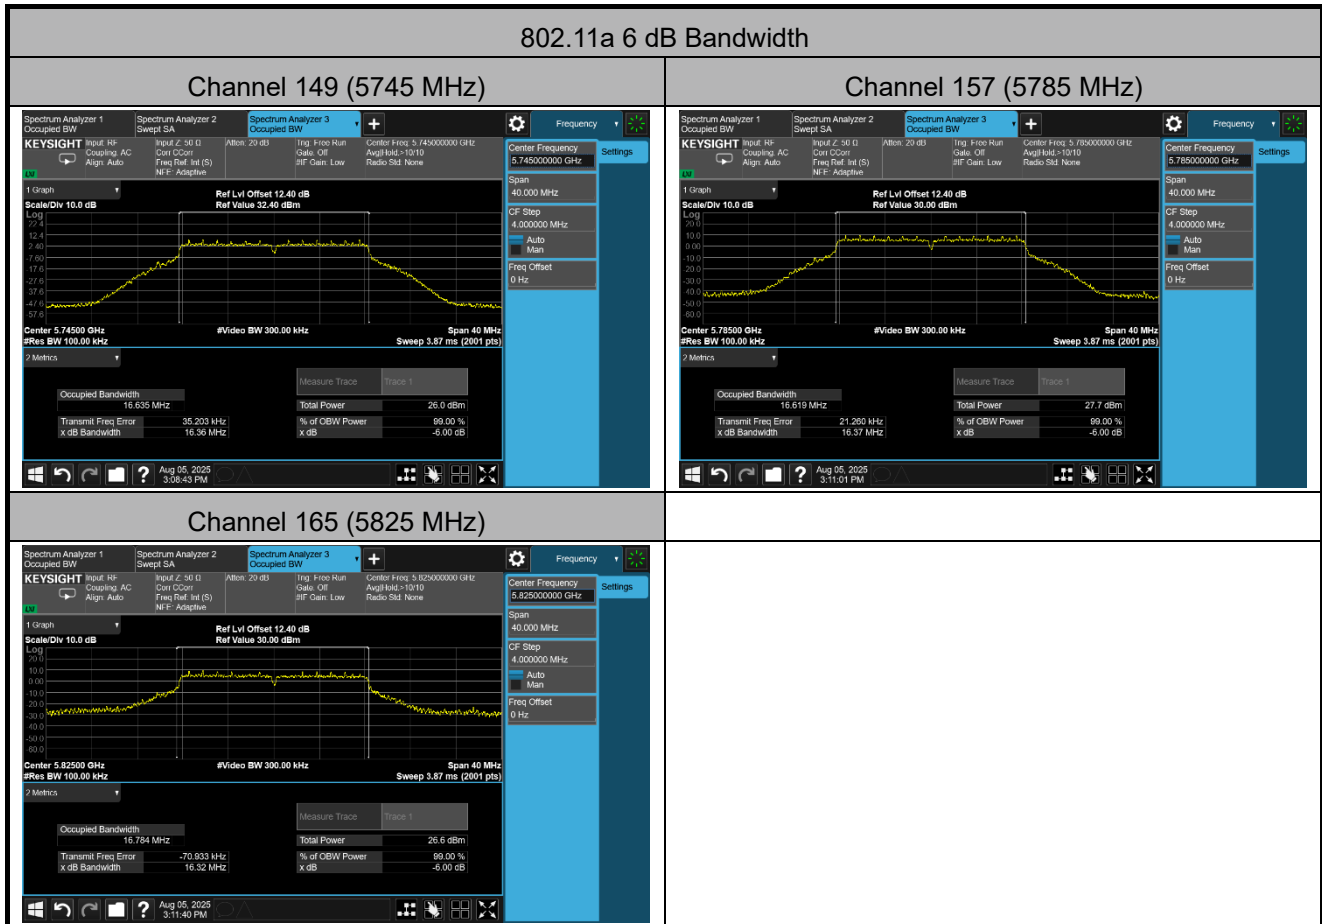


802.11ac-VHT20 6 dB Bandwidth


Channel 149 (5745 MHz)

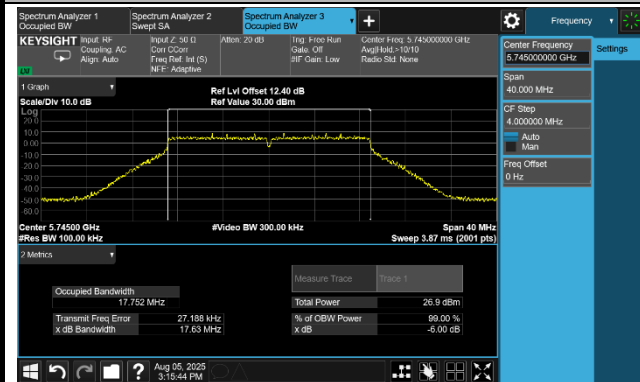

Channel 157 (5785 MHz)

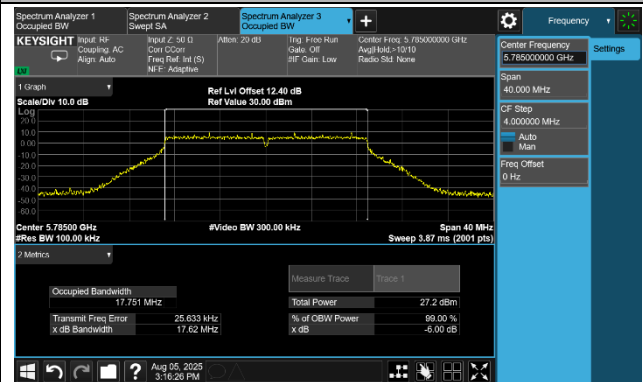


Channel 165 (5825 MHz)

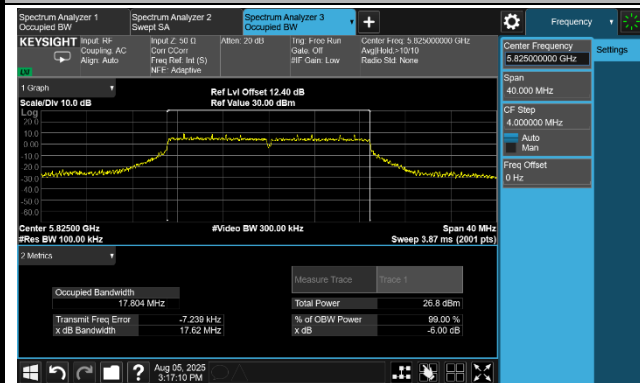



802.11ac-VHT40 6 dB Bandwidth

Channel 151 (5755 MHz)

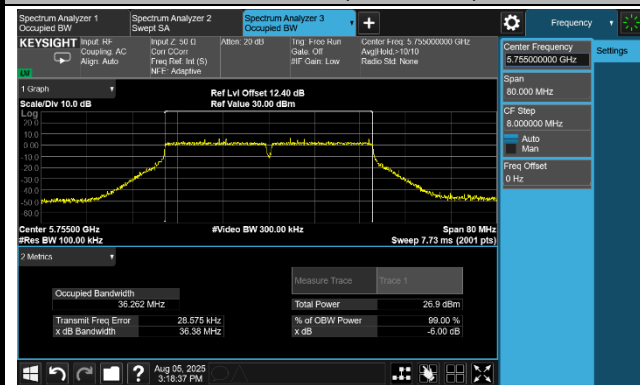


Channel 159 (5795 MHz)

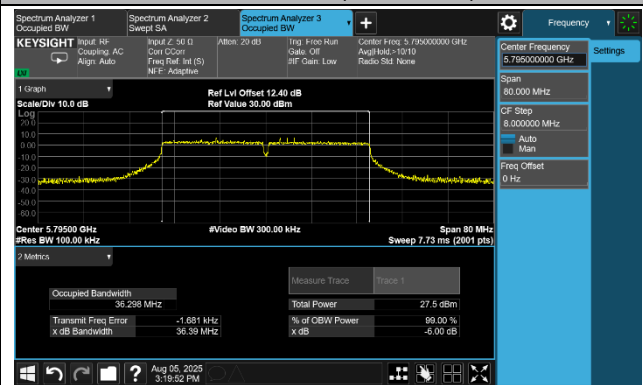

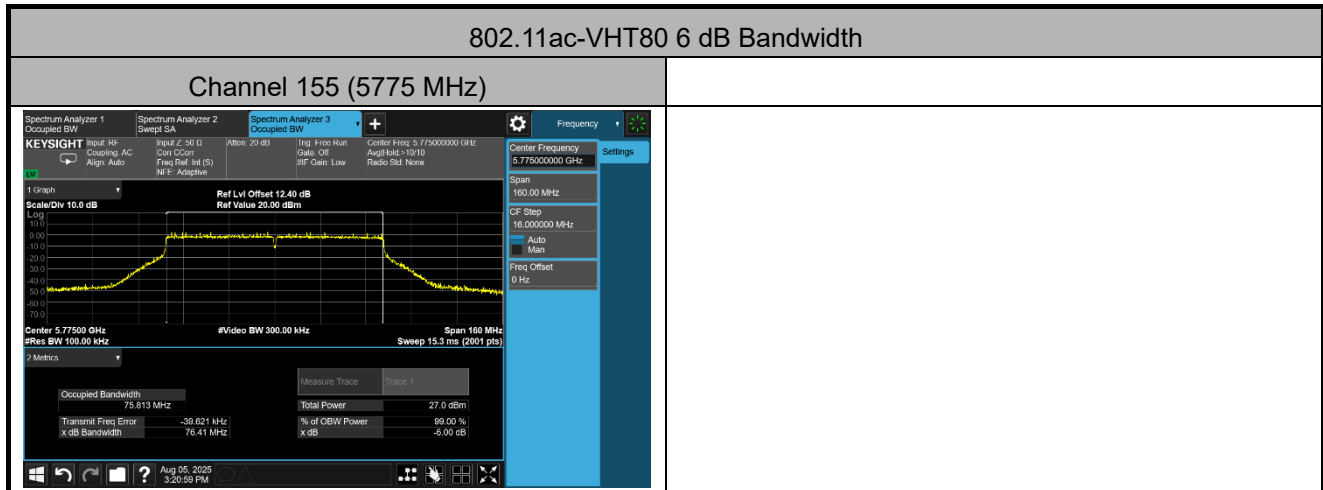


802.11ax-HE20 6 dB Bandwidth


Channel 149 (5745 MHz)

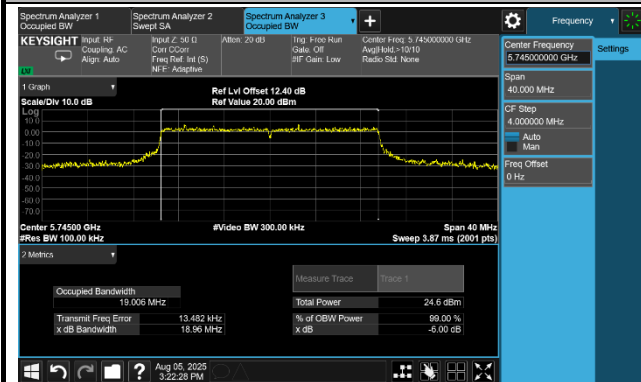

Channel 157 (5785 MHz)

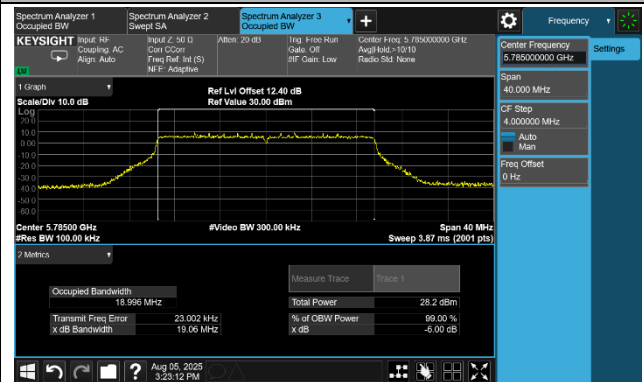


Channel 165 (5825 MHz)

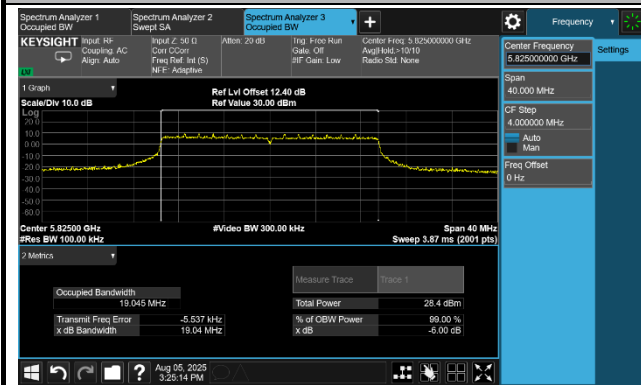



802.11ax-HE40 6 dB Bandwidth

Channel 151 (5755 MHz)

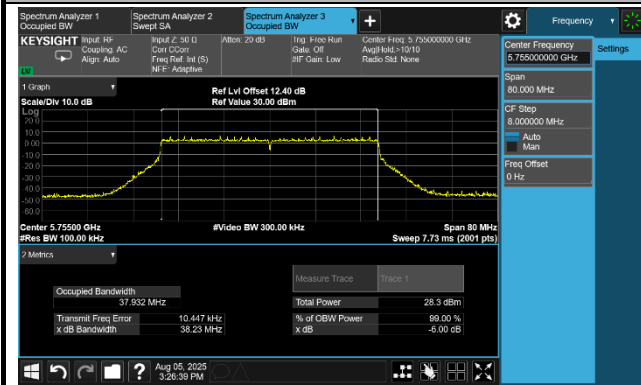


Channel 159 (5795 MHz)

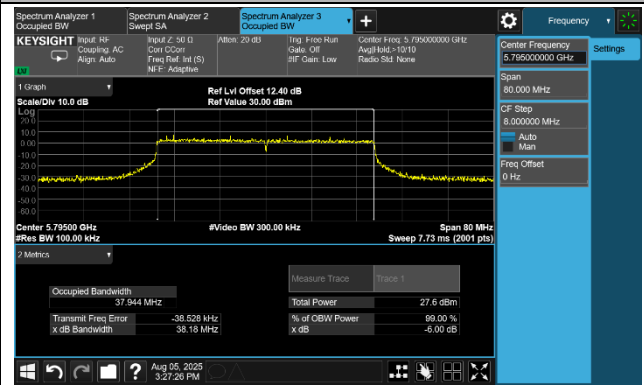

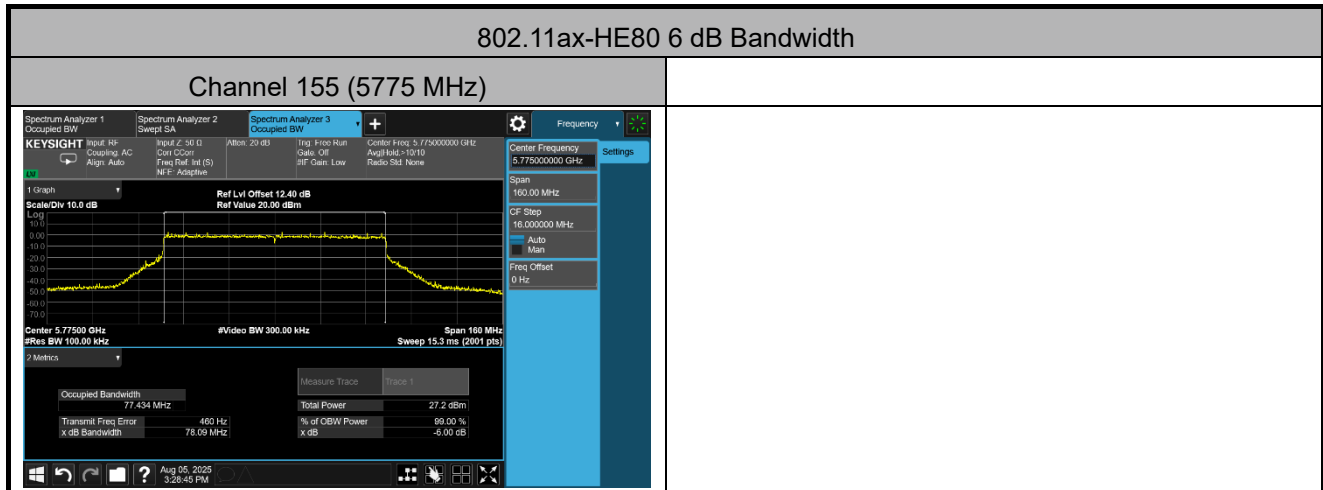


802.11be-EHT20 6 dB Bandwidth


Channel 149 (5745 MHz)

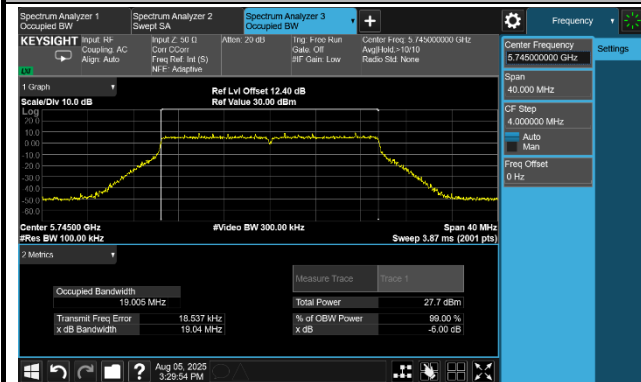

Channel 157 (5785 MHz)

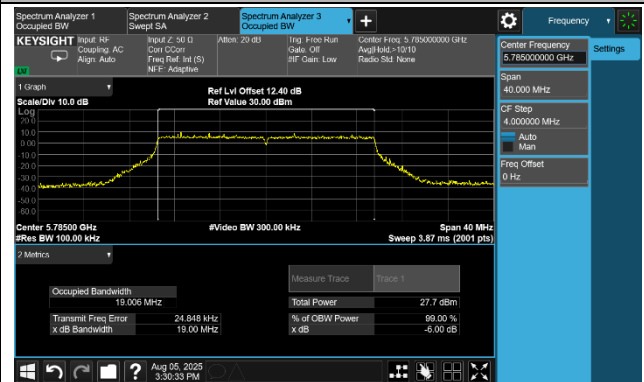


Channel 165 (5825 MHz)

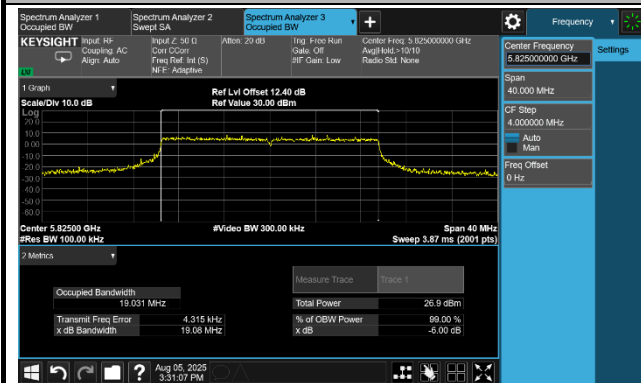



802.11be-EHT40 6 dB Bandwidth

Channel 151 (5755 MHz)

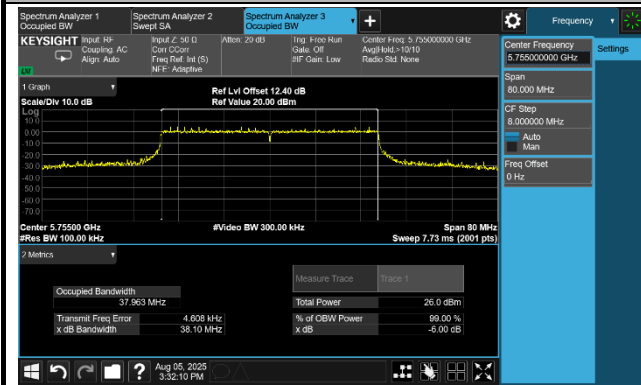

Channel 159 (5795 MHz)

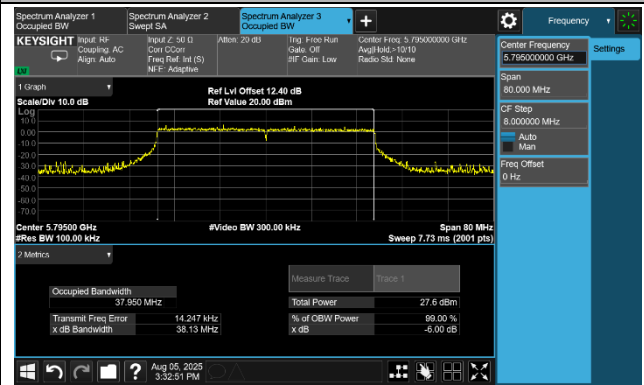


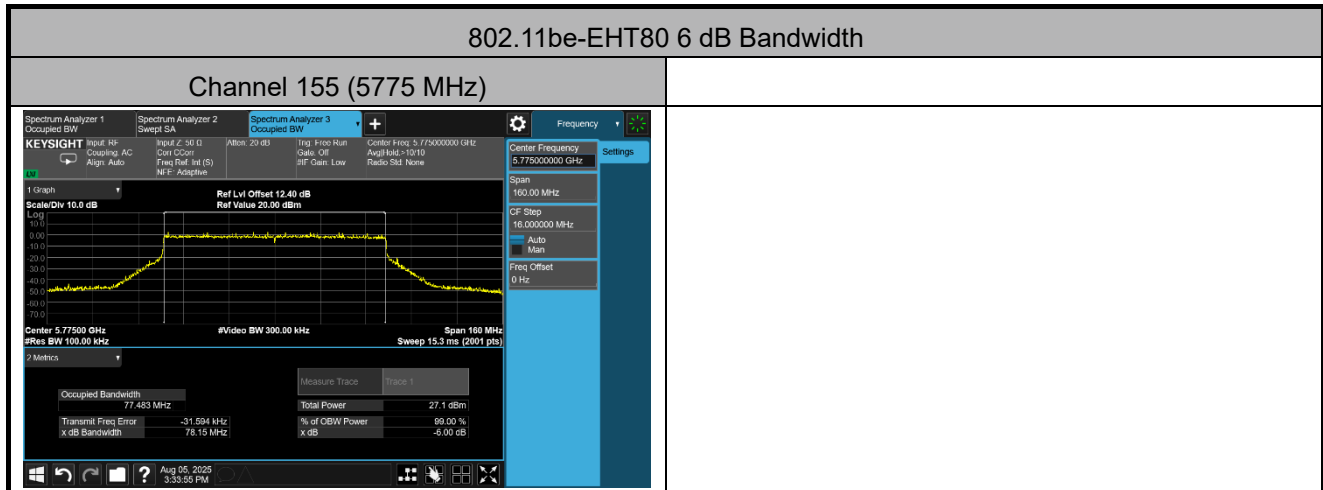

Dual-band mode


Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-08-05		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
11a	6 Mbps	149	5745	16.38	≥0.5
11a	6 Mbps	157	5785	16.39	≥0.5
11a	6 Mbps	165	5825	16.35	≥0.5
11ac-VHT20	MCS0	149	5745	17.66	≥0.5
11ac-VHT20	MCS0	157	5785	17.63	≥0.5
11ac-VHT20	MCS0	165	5825	17.61	≥0.5
11ac-VHT40	MCS0	151	5755	36.42	≥0.5
11ac-VHT40	MCS0	159	5795	36.39	≥0.5
11ac-VHT80	MCS0	155	5775	76.40	≥0.5
11ax-HE20	MCS0	149	5745	19.08	≥0.5
11ax-HE20	MCS0	157	5785	18.94	≥0.5
11ax-HE20	MCS0	165	5825	19.03	≥0.5
11ax-HE40	MCS0	151	5755	38.07	≥0.5
11ax-HE40	MCS0	159	5795	38.05	≥0.5
11ax-HE80	MCS0	155	5775	78.10	≥0.5
11be-EHT20	MCS0	149	5745	19.08	≥0.5
11be-EHT20	MCS0	157	5785	19.02	≥0.5
11be-EHT20	MCS0	165	5825	19.08	≥0.5
11be-EHT40	MCS0	151	5755	38.11	≥0.5
11be-EHT40	MCS0	159	5795	38.06	≥0.5
11be-EHT80	MCS0	155	5775	78.13	≥0.5

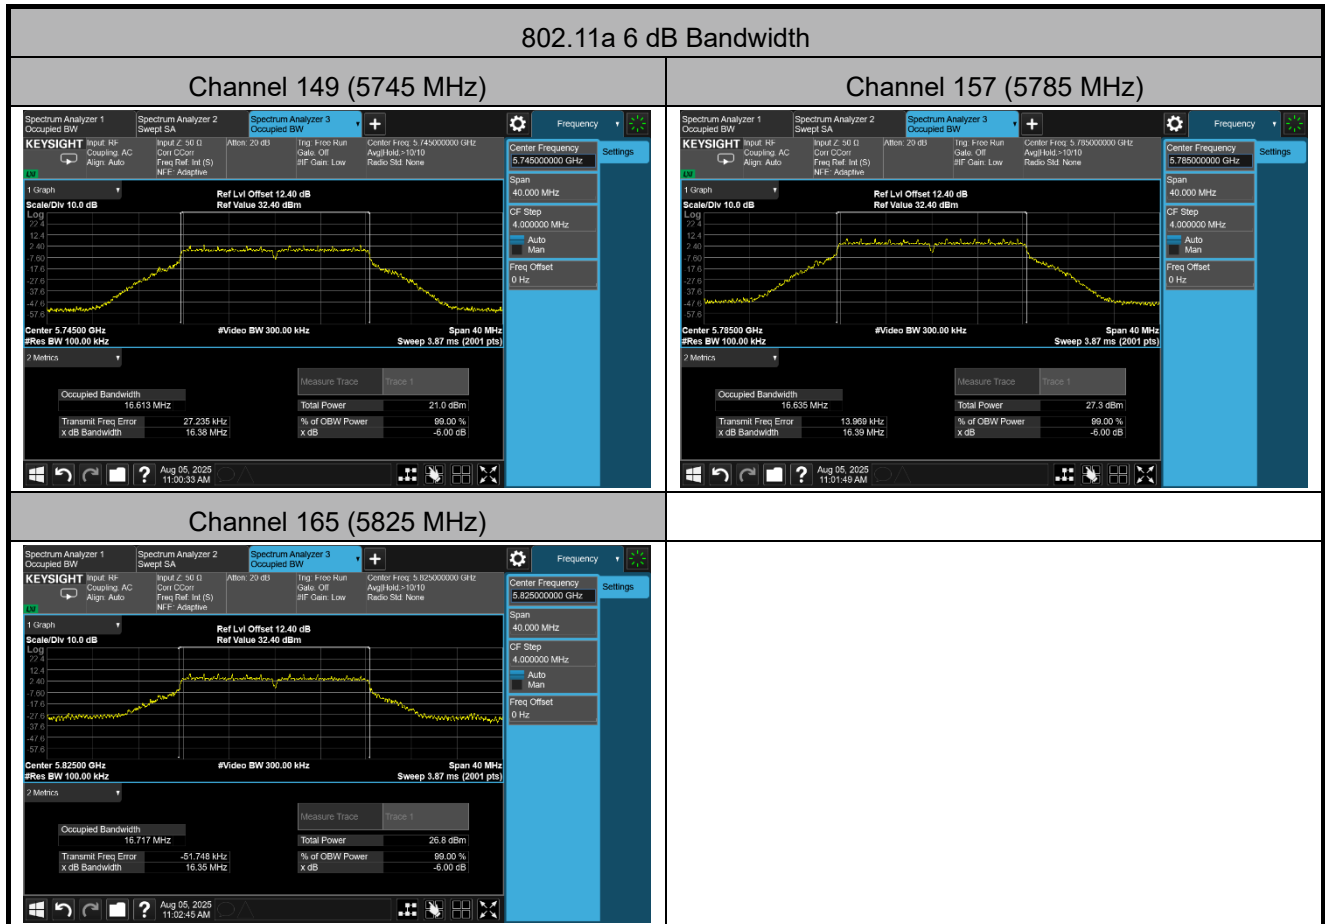


802.11ac-VHT20 6 dB Bandwidth


Channel 149 (5745 MHz)

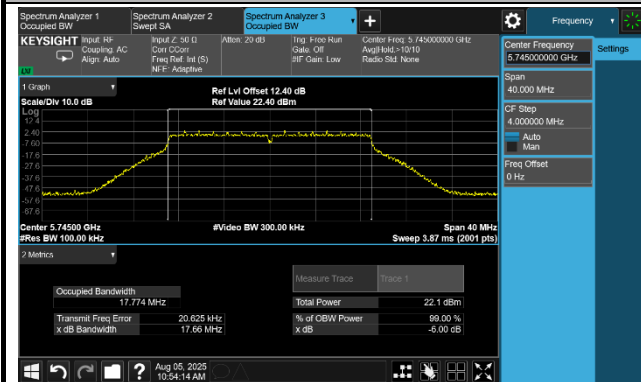

Channel 157 (5785 MHz)

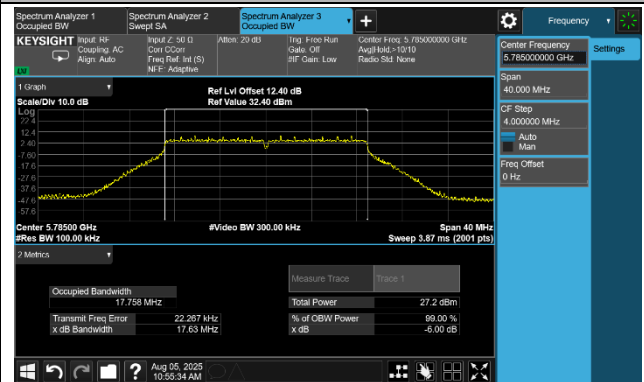


Channel 165 (5825 MHz)

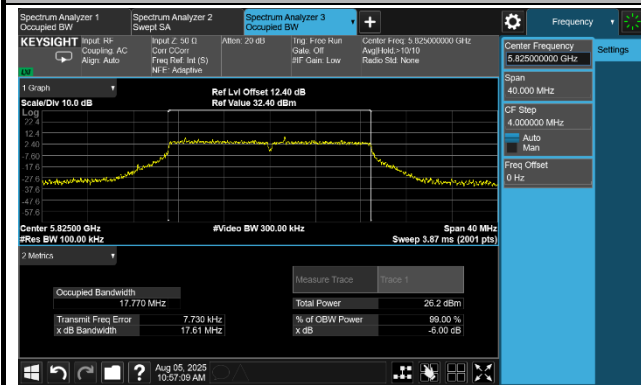



802.11ac-VHT40 6 dB Bandwidth

Channel 151 (5755 MHz)

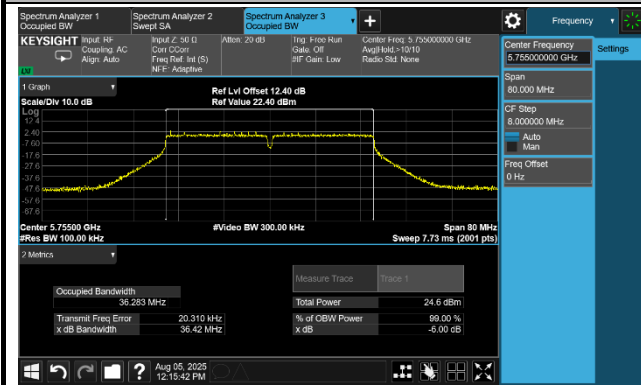


Channel 159 (5795 MHz)

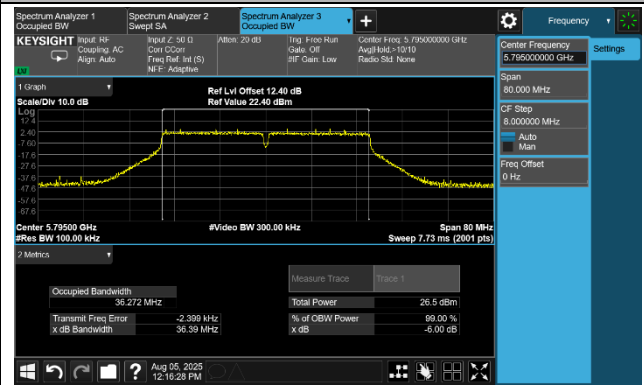

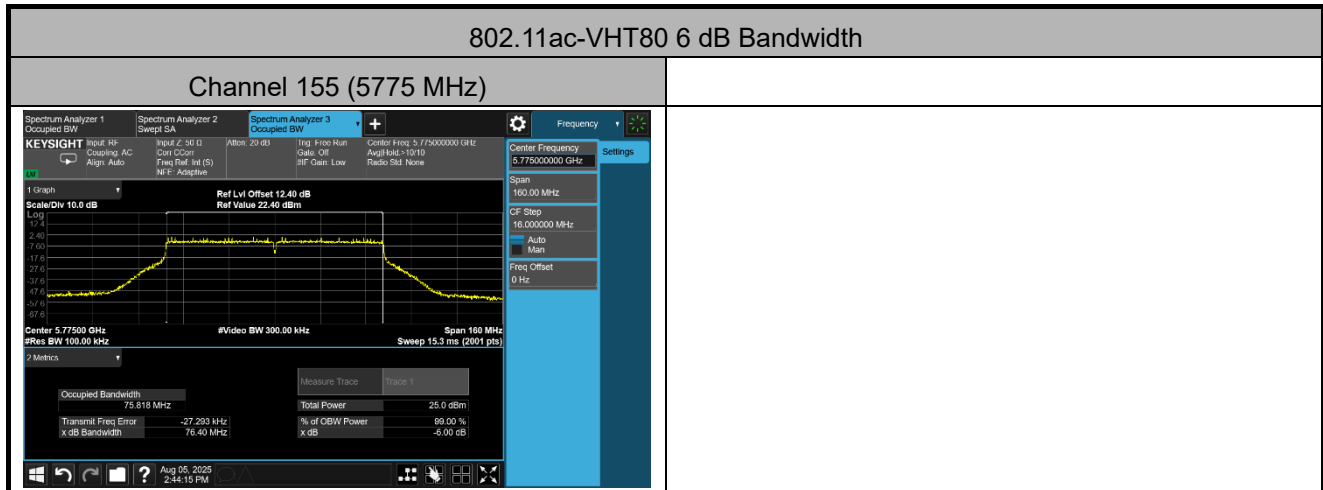


802.11ax-HE20 6 dB Bandwidth


Channel 149 (5745 MHz)

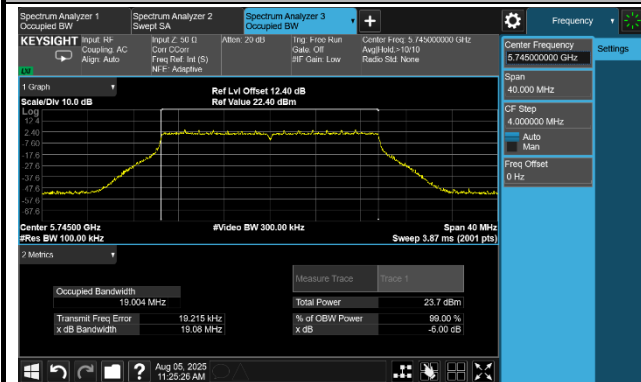

Channel 157 (5785 MHz)

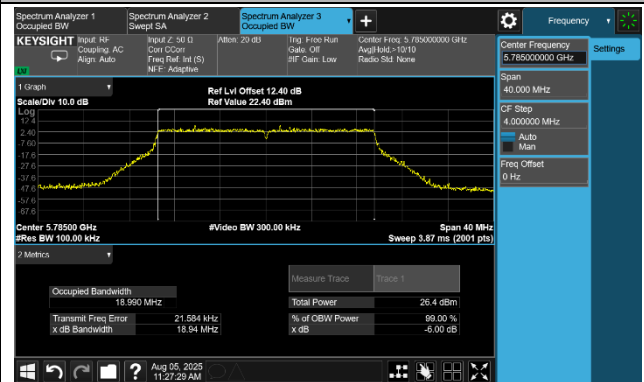


Channel 165 (5825 MHz)

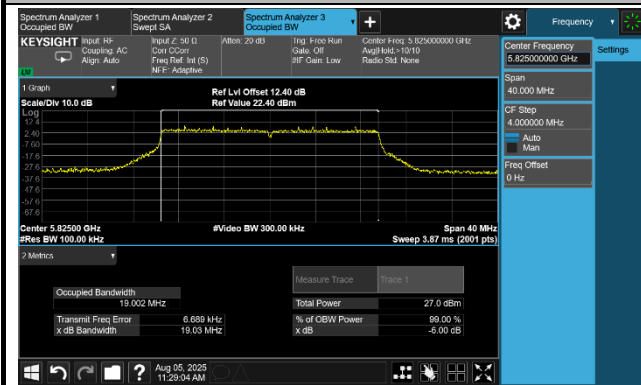



802.11ax-HE40 6 dB Bandwidth

Channel 151 (5755 MHz)

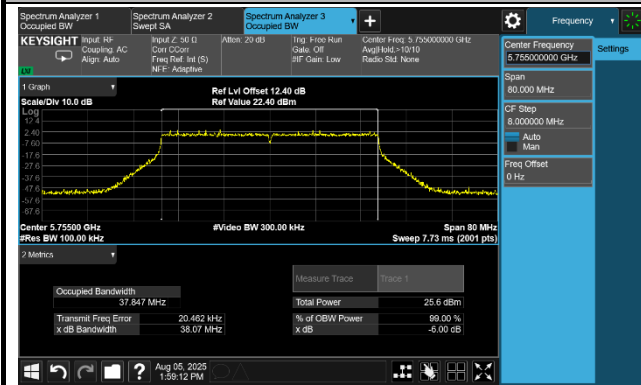


Channel 159 (5795 MHz)

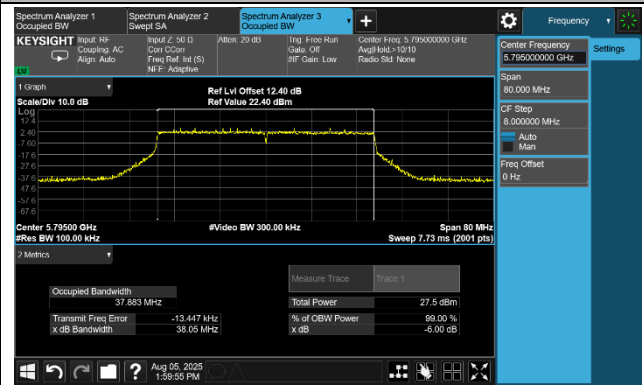

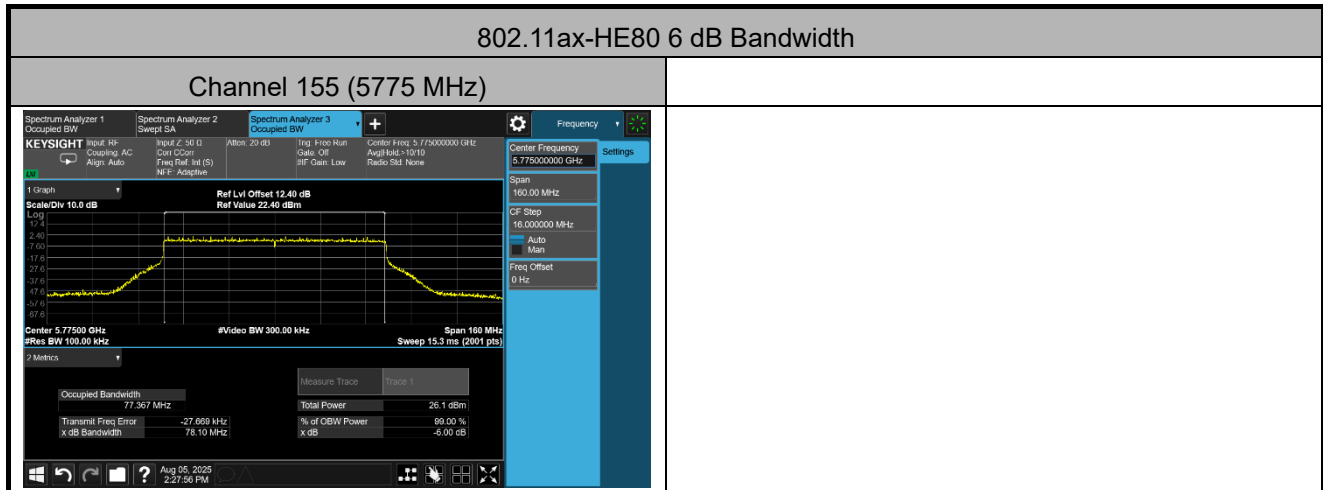


802.11be-EHT20 6 dB Bandwidth


Channel 149 (5745 MHz)

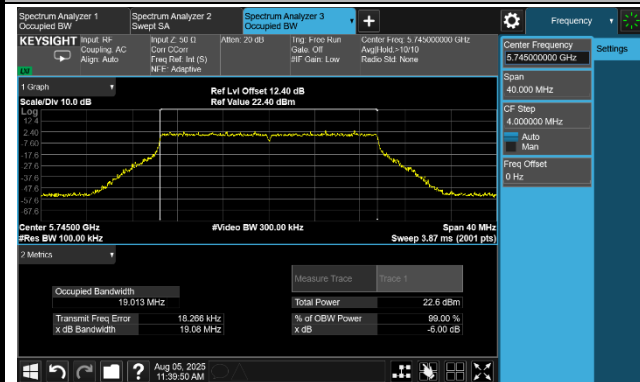

Channel 157 (5785 MHz)

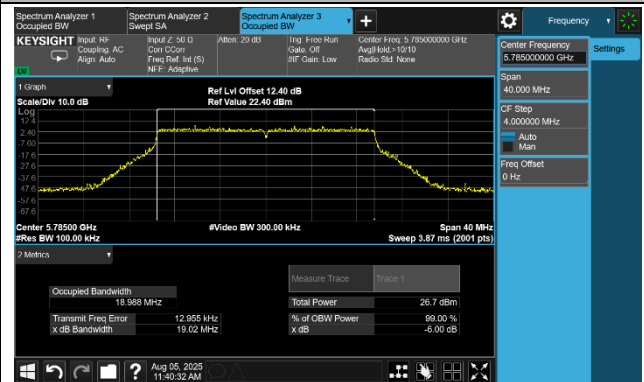


Channel 165 (5825 MHz)

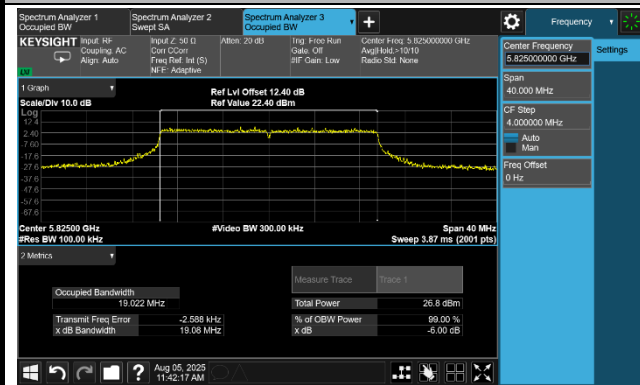



802.11be-EHT40 6 dB Bandwidth

Channel 151 (5755 MHz)

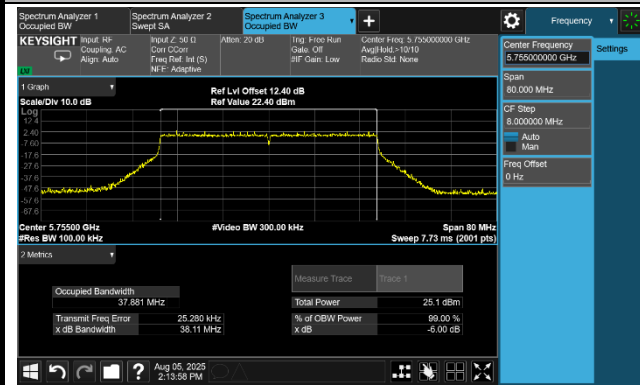

Channel 159 (5795 MHz)

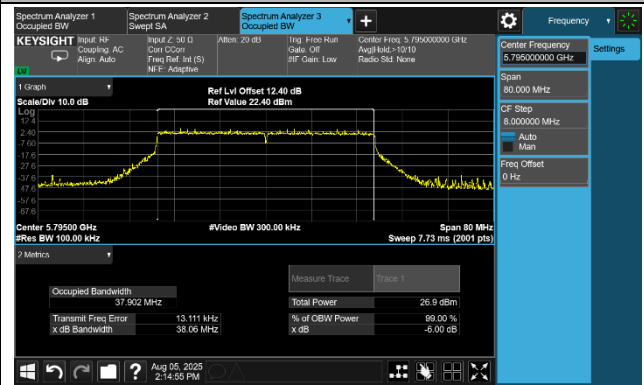

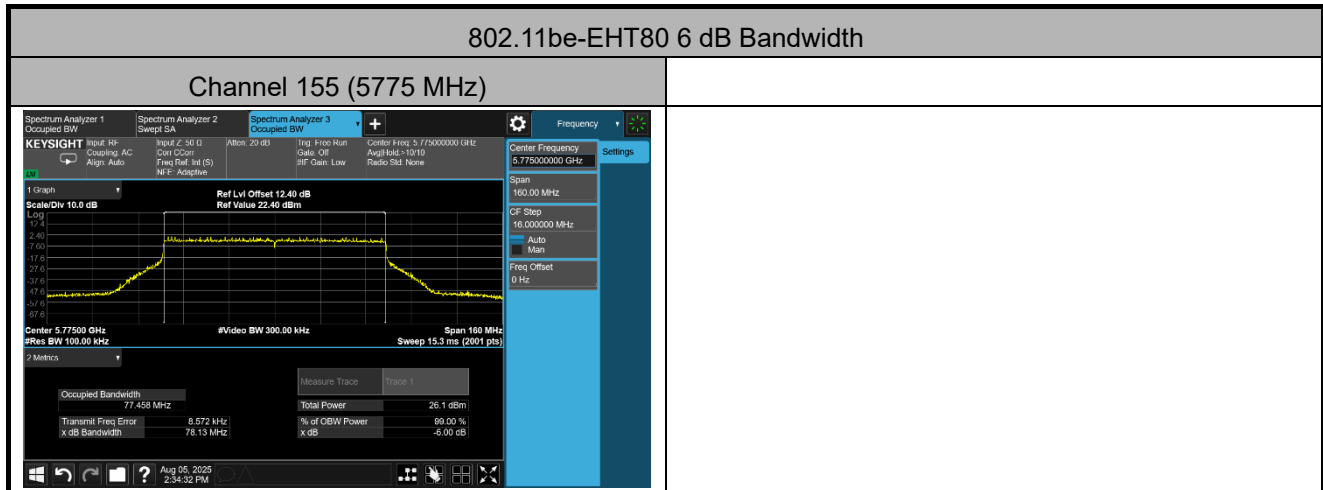

A.4 Output Power Test Result

Tri-band mode

Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-07-21 ~ 2025-08-27		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1				
11a	6 Mbps	36	5180	16.21	16.43	19.33	≤ 25.19	17.78	≤ 21.00
11a	6 Mbps	44	5220	17.78	18.26	21.04	≤ 25.19	19.49	≤ 21.00
11a	6 Mbps	48	5240	17.73	18.08	20.92	≤ 25.19	19.37	≤ 21.00
11a	6 Mbps	52	5260	12.08	12.38	15.24	≤ 19.17	--	--
11a	6 Mbps	60	5300	11.35	11.94	14.67	≤ 19.17	--	--
11a	6 Mbps	64	5320	11.68	11.83	14.77	≤ 19.17	--	--
11a	6 Mbps	100	5500	12.75	13.57	16.19	≤ 20.45	--	--
11a	6 Mbps	116	5580	13.23	13.43	16.34	≤ 20.45	--	--
11a	6 Mbps	140	5700	12.91	13.18	16.06	≤ 20.45	--	--
11a	6 Mbps	144	5720	12.65	12.85	15.76	≤ 20.45	--	--
11a	6 Mbps	149	5745	19.21	19.32	22.28	≤ 26.77	--	--
11a	6 Mbps	157	5785	20.70	20.36	23.54	≤ 26.77	--	--
11a	6 Mbps	165	5825	19.95	19.97	22.97	≤ 26.77	--	--
11ac-VHT20	MCS0	36	5180	16.27	16.59	19.44	≤ 25.19	14.89	≤ 21.00
11ac-VHT20	MCS0	44	5220	20.12	20.40	23.27	≤ 25.19	18.72	≤ 21.00
11ac-VHT20	MCS0	48	5240	20.38	20.92	23.67	≤ 25.19	19.12	≤ 21.00
11ac-VHT20	MCS0	52	5260	14.92	15.44	18.20	≤ 19.17	--	--
11ac-VHT20	MCS0	60	5300	15.03	15.35	18.20	≤ 19.17	--	--
11ac-VHT20	MCS0	64	5320	15.27	15.50	18.40	≤ 19.17	--	--
11ac-VHT20	MCS0	100	5500	16.06	16.53	19.31	≤ 20.45	--	--
11ac-VHT20	MCS0	116	5580	16.32	16.52	19.43	≤ 20.45	--	--
11ac-VHT20	MCS0	140	5700	15.12	15.37	18.26	≤ 20.45	--	--
11ac-VHT20	MCS0	144	5720	15.94	16.42	19.20	≤ 20.45	--	--
11ac-VHT20	MCS0	149	5745	20.12	20.26	23.20	≤ 26.77	--	--
11ac-VHT20	MCS0	157	5785	20.72	20.54	23.64	≤ 26.77	--	--
11ac-VHT20	MCS0	165	5825	20.07	20.18	23.14	≤ 26.77	--	--

Test Mode	Data Rate MCS	Channel No.	Frequency (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1				
11ac-VHT40	MCS0	38	5190	16.78	17.06	19.93	≤ 25.19	15.38	≤ 21.00
11ac-VHT40	MCS0	46	5230	20.43	20.72	23.59	≤ 25.19	19.04	≤ 21.00
11ac-VHT40	MCS0	54	5270	15.69	16.09	18.90	≤ 19.17	--	--
11ac-VHT40	MCS0	62	5310	15.62	16.12	18.89	≤ 19.17	--	--
11ac-VHT40	MCS0	102	5510	16.66	17.20	19.95	≤ 20.45	--	--
11ac-VHT40	MCS0	110	5550	16.87	17.25	20.07	≤ 20.45	--	--
11ac-VHT40	MCS0	134	5670	17.04	17.22	20.14	≤ 20.45	--	--
11ac-VHT40	MCS0	142	5710	16.97	17.40	20.20	≤ 20.45	--	--
11ac-VHT40	MCS0	151	5755	20.20	20.17	23.20	≤ 26.77	--	--
11ac-VHT40	MCS0	159	5795	20.60	20.48	23.55	≤ 26.77	--	--
11ac-VHT80	MCS0	42	5210	15.01	15.47	18.26	≤ 25.19	13.71	≤ 21.00
11ac-VHT80	MCS0	58	5290	14.89	15.25	18.08	≤ 19.17	--	--
11ac-VHT80	MCS0	106	5530	15.21	15.64	18.44	≤ 20.45	--	--
11ac-VHT80	MCS0	122	5610	16.81	16.94	19.89	≤ 20.45	--	--
11ac-VHT80	MCS0	138	5690	17.13	17.53	20.34	≤ 20.45	--	--
11ac-VHT80	MCS0	155	5775	19.81	19.94	22.89	≤ 26.77	--	--
11ac-VHT160	MCS0	50	5250	14.83	15.02	17.94	≤ 19.17	13.39	≤ 21.00
11ac-VHT160	MCS0	114	5570	14.90	15.35	18.14	≤ 20.45	--	--
11ax-HE20	MCS0	36	5180	17.55	17.62	20.60	≤ 25.19	16.05	≤ 21.00
11ax-HE20	MCS0	44	5220	20.26	20.61	23.45	≤ 25.19	18.90	≤ 21.00
11ax-HE20	MCS0	48	5240	20.23	20.38	23.32	≤ 25.19	18.77	≤ 21.00
11ax-HE20	MCS0	52	5260	15.29	15.69	18.50	≤ 19.17	--	--
11ax-HE20	MCS0	60	5300	15.06	15.60	18.35	≤ 19.17	--	--
11ax-HE20	MCS0	64	5320	15.50	15.71	18.62	≤ 19.17	--	--
11ax-HE20	MCS0	100	5500	16.57	17.07	19.84	≤ 20.45	--	--
11ax-HE20	MCS0	116	5580	16.53	16.62	19.59	≤ 20.45	--	--
11ax-HE20	MCS0	140	5700	16.47	16.89	19.70	≤ 20.45	--	--
11ax-HE20	MCS0	144	5720	16.09	16.54	19.33	≤ 20.45	--	--
11ax-HE20	MCS0	149	5745	20.32	20.31	23.33	≤ 26.77	--	--
11ax-HE20	MCS0	157	5785	20.74	20.62	23.69	≤ 26.77	--	--
11ax-HE20	MCS0	165	5825	20.33	20.18	23.27	≤ 26.77	--	--

Test Mode	Data Rate MCS	Channel No.	Frequency (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1				
11ax-HE40	MCS0	38	5190	16.96	17.08	20.03	≤ 25.19	15.48	≤ 21.00
11ax-HE40	MCS0	46	5230	20.30	20.46	23.39	≤ 25.19	18.84	≤ 21.00
11ax-HE40	MCS0	54	5270	15.72	16.09	18.92	≤ 19.17	--	--
11ax-HE40	MCS0	62	5310	15.58	16.16	18.89	≤ 19.17	--	--
11ax-HE40	MCS0	102	5510	17.03	17.61	20.34	≤ 20.45	--	--
11ax-HE40	MCS0	110	5550	16.82	17.30	20.08	≤ 20.45	--	--
11ax-HE40	MCS0	134	5670	17.05	17.25	20.16	≤ 20.45	--	--
11ax-HE40	MCS0	142	5710	17.06	17.35	20.22	≤ 20.45	--	--
11ax-HE40	MCS0	151	5755	20.39	20.45	23.43	≤ 26.77	--	--
11ax-HE40	MCS0	159	5795	20.88	20.72	23.81	≤ 26.77	--	--
11ax-HE80	MCS0	42	5210	15.57	15.89	18.74	≤ 25.19	14.19	≤ 21.00
11ax-HE80	MCS0	58	5290	15.60	16.12	18.88	≤ 19.17	--	--
11ax-HE80	MCS0	106	5530	17.11	17.62	20.38	≤ 20.45	--	--
11ax-HE80	MCS0	122	5610	16.99	17.05	20.03	≤ 20.45	--	--
11ax-HE80	MCS0	138	5690	17.23	17.44	20.35	≤ 20.45	--	--
11ax-HE80	MCS0	155	5775	19.89	19.98	22.95	≤ 26.77	--	--
11ax-HE160	MCS0	50	5250	14.89	15.09	18.00	≤ 19.17	13.45	≤ 21.00
11ax-HE160	MCS0	114	5570	15.10	15.33	18.23	≤ 20.45	--	--
11be-EHT20	MCS0	36	5180	17.34	17.66	20.51	≤ 25.19	15.96	≤ 21.00
11be-EHT20	MCS0	44	5220	20.16	20.52	23.35	≤ 25.19	18.80	≤ 21.00
11be-EHT20	MCS0	48	5240	20.54	20.83	23.70	≤ 25.19	19.15	≤ 21.00
11be-EHT20	MCS0	52	5260	15.02	15.59	18.32	≤ 19.17	--	--
11be-EHT20	MCS0	60	5300	15.08	15.46	18.28	≤ 19.17	--	--
11be-EHT20	MCS0	64	5320	15.42	15.72	18.58	≤ 19.17	--	--
11be-EHT20	MCS0	100	5500	16.65	16.97	19.82	≤ 20.45	--	--
11be-EHT20	MCS0	116	5580	16.37	16.62	19.51	≤ 20.45	--	--
11be-EHT20	MCS0	140	5700	16.63	16.81	19.73	≤ 20.45	--	--
11be-EHT20	MCS0	144	5720	16.47	16.98	19.74	≤ 20.45	--	--
11be-EHT20	MCS0	149	5745	20.13	20.15	23.15	≤ 26.77	--	--
11be-EHT20	MCS0	157	5785	20.81	20.60	23.72	≤ 26.77	--	--
11be-EHT20	MCS0	165	5825	20.06	20.19	23.14	≤ 26.77	--	--

Test Mode	Data Rate MCS	Channel No.	Frequency (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1				
11be-EHT40	MCS0	38	5190	16.73	17.10	19.93	≤ 25.19	15.38	≤ 21.00
11be-EHT40	MCS0	46	5230	20.41	20.86	23.65	≤ 25.19	19.10	≤ 21.00
11be-EHT40	MCS0	54	5270	15.54	15.91	18.74	≤ 19.17	--	--
11be-EHT40	MCS0	62	5310	15.46	16.01	18.75	≤ 19.17	--	--
11be-EHT40	MCS0	102	5510	16.99	17.45	20.24	≤ 20.45	--	--
11be-EHT40	MCS0	110	5550	16.61	17.21	19.93	≤ 20.45	--	--
11be-EHT40	MCS0	134	5670	16.85	17.08	19.98	≤ 20.45	--	--
11be-EHT40	MCS0	142	5710	17.01	17.26	20.15	≤ 20.45	--	--
11be-EHT40	MCS0	151	5755	20.23	20.33	23.29	≤ 26.77	--	--
11be-EHT40	MCS0	159	5795	20.74	20.53	23.65	≤ 26.77	--	--
11be-EHT80	MCS0	42	5210	15.43	15.96	18.71	≤ 25.19	14.16	≤ 21.00
11be-EHT80	MCS0	58	5290	15.47	15.82	18.66	≤ 19.17	--	--
11be-EHT80	MCS0	106	5530	17.14	17.52	20.34	≤ 20.45	--	--
11be-EHT80	MCS0	122	5610	17.01	17.02	20.03	≤ 20.45	--	--
11be-EHT80	MCS0	138	5690	16.82	17.02	19.93	≤ 20.45	--	--
11be-EHT80	MCS0	155	5775	19.80	19.95	22.89	≤ 26.77	--	--
11be-EHT160	MCS0	50	5250	14.77	15.19	18.00	≤ 19.17	13.45	≤ 21.00
11be-EHT160	MCS0	114	5570	14.98	15.32	18.16	≤ 20.45	--	--

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: For Band-Crossing channel, Average Power Limit = 23.98 dBm or $11 + 10 \times \log_{10} \text{EBW}_{2C}$ which is less.

Note 3: EIRP (dBm) = Total Average Power (dBm) + 30° Uncorrelated Gain (dBi).

Dual-band mode

Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-07-21 ~ 2025-08-27		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3				
11a	6 Mbps	36	5180	11.56	11.90	11.86	11.59	17.75	≤ 24.99	19.01	≤ 21.00
11a	6 Mbps	44	5220	11.69	12.06	11.75	11.52	17.78	≤ 24.99	19.04	≤ 21.00
11a	6 Mbps	48	5240	11.63	11.73	11.57	11.63	17.66	≤ 24.99	18.92	≤ 21.00
11a	6 Mbps	52	5260	5.43	5.56	5.58	5.90	11.64	≤ 18.97	--	--
11a	6 Mbps	60	5300	5.13	5.80	5.41	6.12	11.65	≤ 18.97	--	--
11a	6 Mbps	64	5320	5.25	6.19	5.28	6.06	11.74	≤ 18.97	--	--
11a	6 Mbps	100	5500	6.86	7.35	6.50	7.18	13.01	≤ 20.30	--	--
11a	6 Mbps	116	5580	7.22	7.62	7.01	7.58	13.39	≤ 20.30	--	--
11a	6 Mbps	140	5700	7.13	7.77	7.57	7.89	13.62	≤ 20.30	--	--
11a	6 Mbps	144	5720	7.01	7.45	7.36	7.62	13.39	≤ 20.30	--	--
11a	6 Mbps	149	5745	18.99	19.07	19.22	19.41	25.20	≤ 26.10	--	--
11a	6 Mbps	157	5785	19.58	19.59	20.07	19.64	25.75	≤ 26.10	--	--
11a	6 Mbps	165	5825	19.40	19.43	19.96	19.90	25.70	≤ 26.10	--	--
11ac-VHT20	MCS0	36	5180	16.28	16.24	16.74	16.87	22.56	≤ 24.99	17.81	≤ 21.00
11ac-VHT20	MCS0	44	5220	18.42	18.76	18.22	18.14	24.41	≤ 24.99	19.66	≤ 21.00
11ac-VHT20	MCS0	48	5240	17.79	18.16	17.67	17.63	23.84	≤ 24.99	19.09	≤ 21.00
11ac-VHT20	MCS0	52	5260	11.75	12.24	11.70	12.20	18.00	≤ 18.97	--	--
11ac-VHT20	MCS0	60	5300	11.80	12.44	11.87	12.41	18.16	≤ 18.97	--	--
11ac-VHT20	MCS0	64	5320	11.48	12.44	11.68	12.08	17.96	≤ 18.97	--	--
11ac-VHT20	MCS0	100	5500	13.39	14.15	13.12	13.87	19.67	≤ 20.30	--	--
11ac-VHT20	MCS0	116	5580	13.25	13.79	13.05	13.74	19.49	≤ 20.30	--	--
11ac-VHT20	MCS0	140	5700	13.17	13.94	13.57	13.96	19.69	≤ 20.30	--	--
11ac-VHT20	MCS0	144	5720	13.03	13.46	13.45	13.68	19.43	≤ 20.30	--	--
11ac-VHT20	MCS0	149	5745	19.35	19.32	20.06	20.02	25.72	≤ 26.10	--	--
11ac-VHT20	MCS0	157	5785	19.46	19.73	20.17	19.96	25.86	≤ 26.10	--	--
11ac-VHT20	MCS0	165	5825	19.48	19.63	19.88	19.73	25.70	≤ 26.10	--	--

Test Mode	Data Rate MCS	Channel No.	Frequency (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3				
11ac-VHT40	MCS0	38	5190	14.56	15.01	14.92	14.87	20.86	≤ 24.99	16.11	≤ 21.00
11ac-VHT40	MCS0	46	5230	18.28	18.72	18.70	18.99	24.70	≤ 24.99	19.95	≤ 21.00
11ac-VHT40	MCS0	54	5270	12.52	12.95	12.49	12.79	18.71	≤ 18.97	--	--
11ac-VHT40	MCS0	62	5310	12.65	13.02	12.62	13.01	18.85	≤ 18.97	--	--
11ac-VHT40	MCS0	102	5510	13.58	14.28	13.21	13.88	19.78	≤ 20.30	--	--
11ac-VHT40	MCS0	110	5550	13.78	14.55	13.78	14.32	20.14	≤ 20.30	--	--
11ac-VHT40	MCS0	134	5670	13.87	14.36	13.98	14.49	20.20	≤ 20.30	--	--
11ac-VHT40	MCS0	142	5710	13.47	14.03	13.80	14.07	19.87	≤ 20.30	--	--
11ac-VHT40	MCS0	151	5755	20.66	19.38	19.78	20.01	26.00	≤ 26.10	--	--
11ac-VHT40	MCS0	159	5795	19.78	19.72	20.13	19.63	25.84	≤ 26.10	--	--
11ac-VHT80	MCS0	42	5210	14.85	15.24	14.83	15.05	21.02	≤ 24.99	16.27	≤ 21.00
11ac-VHT80	MCS0	58	5290	12.19	12.63	12.52	12.69	18.53	≤ 18.97	--	--
11ac-VHT80	MCS0	106	5530	13.46	14.02	13.63	13.87	19.77	≤ 20.30	--	--
11ac-VHT80	MCS0	122	5610	13.56	13.92	14.01	14.11	19.93	≤ 20.30	--	--
11ac-VHT80	MCS0	138	5690	13.71	13.92	14.17	14.10	20.00	≤ 20.30	--	--
11ac-VHT80	MCS0	155	5775	18.76	18.42	19.02	19.01	24.83	≤ 26.10	--	--
11ac-VHT160	MCS0	50	5250	12.18	12.13	12.33	12.81	18.39	≤ 18.97	13.64	≤ 21.00
11ac-VHT160	MCS0	114	5570	13.76	14.16	14.25	14.29	20.14	≤ 20.30	--	--
11ax-HE20	MCS0	36	5180	16.00	16.01	15.97	16.13	22.05	≤ 24.99	17.30	≤ 21.00
11ax-HE20	MCS0	44	5220	18.47	18.80	18.41	18.45	24.56	≤ 24.99	19.81	≤ 21.00
11ax-HE20	MCS0	48	5240	17.80	18.62	18.42	18.30	24.32	≤ 24.99	19.57	≤ 21.00
11ax-HE20	MCS0	52	5260	12.53	12.95	12.35	12.88	18.71	≤ 18.97	--	--
11ax-HE20	MCS0	60	5300	12.05	12.67	12.07	12.56	18.37	≤ 18.97	--	--
11ax-HE20	MCS0	64	5320	11.80	12.51	11.83	12.23	18.12	≤ 18.97	--	--
11ax-HE20	MCS0	100	5500	13.55	14.25	13.27	14.05	19.82	≤ 20.30	--	--
11ax-HE20	MCS0	116	5580	13.46	13.89	13.35	13.99	19.70	≤ 20.30	--	--
11ax-HE20	MCS0	140	5700	13.35	14.10	13.82	14.06	19.86	≤ 20.30	--	--
11ax-HE20	MCS0	144	5720	13.28	13.72	13.61	13.87	19.65	≤ 20.30	--	--
11ax-HE20	MCS0	149	5745	19.96	19.76	19.75	20.14	25.93	≤ 26.10	--	--
11ax-HE20	MCS0	157	5785	19.84	19.57	19.95	19.70	25.79	≤ 26.10	--	--
11ax-HE20	MCS0	165	5825	19.43	19.24	19.75	19.32	25.46	≤ 26.10	--	--

Test Mode	Data Rate MCS	Channel No.	Frequency (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3				
11ax-HE40	MCS0	38	5190	14.76	15.04	14.92	15.12	20.98	≤ 24.99	16.23	≤ 21.00
11ax-HE40	MCS0	46	5230	18.12	18.42	18.45	18.53	24.40	≤ 24.99	19.65	≤ 21.00
11ax-HE40	MCS0	54	5270	12.69	12.70	12.55	12.66	18.67	≤ 18.97	--	--
11ax-HE40	MCS0	62	5310	12.78	12.53	12.78	12.62	18.70	≤ 18.97	--	--
11ax-HE40	MCS0	102	5510	14.02	14.11	13.94	13.94	20.02	≤ 20.30	--	--
11ax-HE40	MCS0	110	5550	14.01	14.15	13.86	14.16	20.07	≤ 20.30	--	--
11ax-HE40	MCS0	134	5670	13.97	14.12	14.08	13.96	20.05	≤ 20.30	--	--
11ax-HE40	MCS0	142	5710	13.95	14.09	14.45	14.10	20.17	≤ 20.30	--	--
11ax-HE40	MCS0	151	5755	19.44	19.50	19.99	19.61	25.66	≤ 26.10	--	--
11ax-HE40	MCS0	159	5795	19.70	19.90	19.97	19.79	25.86	≤ 26.10	--	--
11ax-HE80	MCS0	42	5210	14.79	15.40	15.05	15.10	21.11	≤ 24.99	16.36	≤ 21.00
11ax-HE80	MCS0	58	5290	12.31	12.52	12.76	12.79	18.62	≤ 18.97	--	--
11ax-HE80	MCS0	106	5530	13.63	13.96	13.78	13.90	19.84	≤ 20.30	--	--
11ax-HE80	MCS0	122	5610	13.93	13.86	14.21	14.01	20.03	≤ 20.30	--	--
11ax-HE80	MCS0	138	5690	13.81	13.85	14.32	14.02	20.03	≤ 20.30	--	--
11ax-HE80	MCS0	155	5775	19.31	19.23	19.75	19.59	25.50	≤ 26.10	--	--
11ax-HE160	MCS0	50	5250	12.32	12.56	12.73	12.62	18.58	≤ 18.97	13.83	≤ 21.00
11ax-HE160	MCS0	114	5570	13.96	14.09	14.19	14.48	20.20	≤ 20.30	--	--
11be-EHT20	MCS0	36	5180	15.00	15.43	15.41	15.63	21.39	≤ 24.99	16.64	≤ 21.00
11be-EHT20	MCS0	44	5220	18.07	18.72	18.32	18.55	24.44	≤ 24.99	19.69	≤ 21.00
11be-EHT20	MCS0	48	5240	18.16	18.62	18.22	18.46	24.39	≤ 24.99	19.64	≤ 21.00
11be-EHT20	MCS0	52	5260	12.43	13.10	12.32	12.85	18.71	≤ 18.97	--	--
11be-EHT20	MCS0	60	5300	12.26	12.70	12.04	12.13	18.31	≤ 18.97	--	--
11be-EHT20	MCS0	64	5320	12.25	13.05	12.10	12.14	18.42	≤ 18.97	--	--
11be-EHT20	MCS0	100	5500	13.72	14.30	13.15	13.67	19.75	≤ 20.30	--	--
11be-EHT20	MCS0	116	5580	13.68	13.61	13.40	13.59	19.59	≤ 20.30	--	--
11be-EHT20	MCS0	140	5700	13.54	13.85	13.68	13.94	19.78	≤ 20.30	--	--
11be-EHT20	MCS0	144	5720	13.40	13.23	13.74	13.62	19.52	≤ 20.30	--	--
11be-EHT20	MCS0	149	5745	19.64	19.55	20.37	20.14	25.96	≤ 26.10	--	--
11be-EHT20	MCS0	157	5785	19.66	19.56	19.88	19.68	25.72	≤ 26.10	--	--
11be-EHT20	MCS0	165	5825	19.76	19.57	20.12	19.88	25.86	≤ 26.10	--	--

Test Mode	Data Rate MCS	Channel No.	Frequency (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3				
11be-EHT40	MCS0	38	5190	14.73	15.26	15.40	15.29	21.20	≤ 24.99	16.45	≤ 21.00
11be-EHT40	MCS0	46	5230	18.71	18.81	18.58	18.94	24.78	≤ 24.99	20.03	≤ 21.00
11be-EHT40	MCS0	54	5270	12.33	12.92	12.38	12.70	18.61	≤ 18.97	--	--
11be-EHT40	MCS0	62	5310	12.45	13.07	12.52	12.96	18.78	≤ 18.97	--	--
11be-EHT40	MCS0	102	5510	13.78	14.69	13.62	14.07	20.08	≤ 20.30	--	--
11be-EHT40	MCS0	110	5550	13.63	14.60	13.62	14.09	20.02	≤ 20.30	--	--
11be-EHT40	MCS0	134	5670	13.82	14.25	13.91	14.42	20.13	≤ 20.30	--	--
11be-EHT40	MCS0	142	5710	13.33	13.98	13.78	14.02	19.81	≤ 20.30	--	--
11be-EHT40	MCS0	151	5755	19.76	19.72	19.73	20.23	25.89	≤ 26.10	--	--
11be-EHT40	MCS0	159	5795	19.63	19.45	19.98	19.57	25.68	≤ 26.10	--	--
11be-EHT80	MCS0	42	5210	15.37	15.74	15.55	15.72	21.62	≤ 24.99	16.87	≤ 21.00
11be-EHT80	MCS0	58	5290	12.48	12.55	12.77	12.67	18.64	≤ 18.97	--	--
11be-EHT80	MCS0	106	5530	13.72	14.15	13.78	13.95	19.92	≤ 20.30	--	--
11be-EHT80	MCS0	122	5610	14.08	13.82	14.19	14.04	20.06	≤ 20.30	--	--
11be-EHT80	MCS0	138	5690	13.59	13.78	14.20	14.09	19.94	≤ 20.30	--	--
11be-EHT80	MCS0	155	5775	19.65	19.32	20.01	19.92	25.75	≤ 26.10	--	--
11be-EHT160	MCS0	50	5250	12.00	12.18	12.71	12.61	18.41	≤ 18.97	13.66	≤ 21.00
11be-EHT160	MCS0	114	5570	13.78	14.19	14.30	14.22	20.15	≤ 20.30	--	--

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2: For Band-Crossing channel, Average Power Limit = 23.98 dBm or $11 + 10 \times \log_{10} \text{EBW}_2 \text{ c}$ which is less.

Note 3: EIRP (dBm) = Total Average Power (dBm) + 30° Uncorrelated Gain (dBi).

A.5 Power Spectral Density Test Result

Tri-band mode

Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-07-10 ~ 2025-07-30		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2 a & UNII-2 c)		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/ MHz)
				Ant 0	Ant 1			
11a	6 Mbps	36	5180	4.093	4.417	98.10	7.268	≤ 9.18
11a	6 Mbps	44	5220	5.402	5.977	98.10	8.709	≤ 9.18
11a	6 Mbps	48	5240	5.582	5.861	98.10	8.734	≤ 9.18
11a	6 Mbps	52	5260	-0.186	0.262	98.10	3.054	≤ 3.18
11a	6 Mbps	60	5300	-0.514	-0.115	98.10	2.700	≤ 3.18
11a	6 Mbps	64	5320	-0.465	-0.120	98.10	2.721	≤ 3.18
11a	6 Mbps	100	5500	0.825	1.325	98.10	4.092	≤ 4.46
11a	6 Mbps	116	5580	1.038	1.427	98.10	4.247	≤ 4.46
11a	6 Mbps	140	5700	1.127	1.346	98.10	4.248	≤ 4.46
11a	6 Mbps	144	5720	0.784	1.117	98.10	3.964	≤ 4.46
11ac-VHT20	MCS0	36	5180	3.682	4.117	97.61	7.020	≤ 12.19
11ac-VHT20	MCS0	44	5220	7.391	7.899	97.61	10.768	≤ 12.19
11ac-VHT20	MCS0	48	5240	7.821	8.404	97.61	11.238	≤ 12.19
11ac-VHT20	MCS0	52	5260	2.514	2.952	97.61	5.854	≤ 6.19
11ac-VHT20	MCS0	60	5300	2.505	3.095	97.61	5.925	≤ 6.19
11ac-VHT20	MCS0	64	5320	2.795	3.137	97.61	6.085	≤ 6.19
11ac-VHT20	MCS0	100	5500	3.591	4.121	97.61	6.979	≤ 7.47
11ac-VHT20	MCS0	116	5580	3.802	4.048	97.61	7.042	≤ 7.47
11ac-VHT20	MCS0	140	5700	2.853	3.123	97.61	6.105	≤ 7.47
11ac-VHT20	MCS0	144	5720	3.676	4.165	97.61	7.043	≤ 7.47
11ac-VHT40	MCS0	38	5190	1.339	1.966	96.09	4.847	≤ 12.19
11ac-VHT40	MCS0	46	5230	5.064	5.700	96.09	8.577	≤ 12.19
11ac-VHT40	MCS0	54	5270	-0.205	0.405	96.09	3.294	≤ 6.19
11ac-VHT40	MCS0	62	5310	-0.022	0.405	96.09	3.380	≤ 6.19
11ac-VHT40	MCS0	102	5510	0.768	1.324	96.09	4.238	≤ 7.47
11ac-VHT40	MCS0	110	5550	0.941	1.501	96.09	4.414	≤ 7.47
11ac-VHT40	MCS0	134	5670	1.288	1.486	96.09	4.572	≤ 7.47
11ac-VHT40	MCS0	142	5710	1.519	1.785	96.09	4.838	≤ 7.47

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/ MHz)
				Ant 0	Ant 1			
11ac-VHT80	MCS0	42	5210	-3.648	-2.721	97.02	-0.018	≤ 12.19
11ac-VHT80	MCS0	58	5290	-5.878	-5.107	97.02	-2.334	≤ 6.19
11ac-VHT80	MCS0	106	5530	-3.416	-2.794	97.02	0.048	≤ 7.47
11ac-VHT80	MCS0	122	5610	-1.612	-1.444	97.02	1.614	≤ 7.47
11ac-VHT80	MCS0	138	5690	-0.990	-0.827	97.02	2.234	≤ 7.47
11ac-VHT160	MCS0	50	5250	-6.294	-5.757	96.65	-2.859	≤ 6.19
11ac-VHT160	MCS0	114	5570	-6.261	-5.546	96.65	-2.731	≤ 7.47
11ax-HE20	MCS0	36	5180	4.680	5.008	96.29	8.022	≤ 12.19
11ax-HE20	MCS0	44	5220	7.273	7.701	96.29	10.667	≤ 12.19
11ax-HE20	MCS0	48	5240	7.240	7.603	96.29	10.600	≤ 12.19
11ax-HE20	MCS0	52	5260	2.479	2.953	96.29	5.897	≤ 6.19
11ax-HE20	MCS0	60	5300	2.475	2.915	96.29	5.875	≤ 6.19
11ax-HE20	MCS0	64	5320	2.744	2.918	96.29	6.006	≤ 6.19
11ax-HE20	MCS0	100	5500	4.009	4.331	96.29	7.347	≤ 7.47
11ax-HE20	MCS0	116	5580	3.664	3.972	96.29	6.995	≤ 7.47
11ax-HE20	MCS0	140	5700	4.003	4.277	96.29	7.317	≤ 7.47
11ax-HE20	MCS0	144	5720	3.596	4.076	96.29	7.017	≤ 7.47
11ax-HE40	MCS0	38	5190	1.188	1.691	96.28	4.622	≤ 12.19
11ax-HE40	MCS0	46	5230	4.631	4.959	96.28	7.973	≤ 12.19
11ax-HE40	MCS0	54	5270	-0.407	0.157	96.28	3.059	≤ 6.19
11ax-HE40	MCS0	62	5310	-2.504	-3.216	96.28	0.330	≤ 6.19
11ax-HE40	MCS0	102	5510	1.025	1.490	96.28	4.439	≤ 7.47
11ax-HE40	MCS0	110	5550	0.669	1.228	96.28	4.132	≤ 7.47
11ax-HE40	MCS0	134	5670	1.087	1.291	96.28	4.365	≤ 7.47
11ax-HE40	MCS0	142	5710	1.196	1.659	96.28	4.609	≤ 7.47
11ax-HE80	MCS0	42	5210	-3.227	-2.480	98.00	0.261	≤ 12.19
11ax-HE80	MCS0	58	5290	-5.828	-5.605	98.00	-2.617	≤ 6.19
11ax-HE80	MCS0	106	5530	-1.430	-0.991	98.00	1.893	≤ 7.47
11ax-HE80	MCS0	122	5610	-1.667	-1.567	98.00	1.481	≤ 7.47
11ax-HE80	MCS0	138	5690	-1.207	-0.908	98.00	2.043	≤ 7.47
11ax-HE160	MCS0	50	5250	-6.295	-5.754	96.06	-2.831	≤ 6.19
11ax-HE160	MCS0	114	5570	-6.305	-5.619	96.06	-2.764	≤ 7.47

Test Mode	Data Rate/MCS	Channel No.	Frequency (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/ MHz)
				Ant 0	Ant 1			
11be-EHT20	MCS0	36	5180	4.473	4.987	97.44	7.861	≤ 12.19
11be-EHT20	MCS0	44	5220	7.222	7.779	97.44	10.632	≤ 12.19
11be-EHT20	MCS0	48	5240	7.619	8.262	97.44	11.075	≤ 12.19
11be-EHT20	MCS0	52	5260	2.431	2.894	97.44	5.792	≤ 6.19
11be-EHT20	MCS0	60	5300	2.421	2.949	97.44	5.816	≤ 6.19
11be-EHT20	MCS0	64	5320	2.755	2.885	97.44	5.943	≤ 6.19
11be-EHT20	MCS0	100	5500	3.869	4.525	97.44	7.332	≤ 7.47
11be-EHT20	MCS0	116	5580	3.767	3.952	97.44	6.983	≤ 7.47
11be-EHT20	MCS0	140	5700	3.780	4.317	97.44	7.180	≤ 7.47
11be-EHT20	MCS0	144	5720	3.950	4.529	97.44	7.372	≤ 7.47
11be-EHT40	MCS0	38	5190	0.935	1.540	96.06	4.433	≤ 12.19
11be-EHT40	MCS0	46	5230	4.683	5.330	96.06	8.203	≤ 12.19
11be-EHT40	MCS0	54	5270	-0.582	0.098	96.06	2.956	≤ 6.19
11be-EHT40	MCS0	62	5310	-0.423	-0.007	96.06	2.975	≤ 6.19
11be-EHT40	MCS0	102	5510	0.752	1.340	96.06	4.241	≤ 7.47
11be-EHT40	MCS0	110	5550	0.552	1.032	96.06	3.984	≤ 7.47
11be-EHT40	MCS0	134	5670	0.925	1.130	96.06	4.214	≤ 7.47
11be-EHT40	MCS0	142	5710	1.241	1.488	96.06	4.551	≤ 7.47
11be-EHT80	MCS0	42	5210	-3.195	-2.318	97.23	0.398	≤ 12.19
11be-EHT80	MCS0	58	5290	-3.093	-2.622	97.23	0.281	≤ 6.19
11be-EHT80	MCS0	106	5530	-1.429	-0.899	97.23	1.976	≤ 7.47
11be-EHT80	MCS0	122	5610	-1.643	-1.406	97.23	1.609	≤ 7.47
11be-EHT80	MCS0	138	5690	-1.541	-1.317	97.23	1.705	≤ 7.47
11be-EHT160	MCS0	50	5250	-6.298	-5.674	97.24	-2.843	≤ 6.19
11be-EHT160	MCS0	114	5570	-6.148	-5.436	97.24	-2.646	≤ 7.47

Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \times \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, the total PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\}$.

Note 2:

CDD Mode: For 5125 - 5250 MHz Band: PSD Limit (dBm/MHz) = 17 - (13.82 - 6) = 9.18 dBm/MHz

For 5250 - 5350 MHz Band: PSD Limit (dBm/MHz) = 11 - (13.82 - 6) = 3.18 dBm/MHz.

For 5470 - 5725 MHz Band: PSD Limit (dBm/MHz) = 11 - (12.54 - 6) = 4.46 dBm/MHz.

STBC Mode: For 5125 - 5250 MHz Band: PSD Limit (dBm/MHz) = 17 - (10.81 - 6) = 12.19 dBm/MHz

For 5250 - 5350 MHz Band: PSD Limit (dBm/MHz) = 11 - (10.81 - 6) = 6.19 dBm/MHz.

For 5470 - 5725 MHz Band: PSD Limit (dBm/MHz) = 11 - (9.53 - 6) = 7.47 dBm/MHz.

Test Site	WZ-SR6	Test Engineer	Molly Wu
Test Date	2025-08-01		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	AVPSD (dBm/510 kHz)		Duty Cycle (%)	Total PSD (dBm/ 510 kHz)	PSD Limit (dBm/ 500 kHz)
				Ant 0	Ant 1			
11a	6 Mbps	149	5745	4.540	4.661	98.10	7.611	≤ 23.77
11a	6 Mbps	157	5785	6.288	6.230	98.10	9.269	≤ 23.77
11a	6 Mbps	165	5825	6.163	6.089	98.10	9.136	≤ 23.77
11ac-VHT20	MCS0	149	5745	5.358	5.427	97.61	8.508	≤ 26.77
11ac-VHT20	MCS0	157	5785	5.937	5.767	97.61	8.968	≤ 26.77
11ac-VHT20	MCS0	165	5825	5.784	5.734	97.61	8.874	≤ 26.77
11ac-VHT40	MCS0	151	5755	2.557	2.642	96.09	5.783	≤ 26.77
11ac-VHT40	MCS0	159	5795	3.457	3.236	96.09	6.531	≤ 26.77
11ac-VHT80	MCS0	155	5775	-1.012	-1.002	97.02	2.135	≤ 26.77
11ax-HE20	MCS0	149	5745	5.225	5.251	96.29	8.413	≤ 26.77
11ax-HE20	MCS0	157	5785	5.792	5.600	96.29	8.872	≤ 26.77
11ax-HE20	MCS0	165	5825	5.586	5.603	96.29	8.769	≤ 26.77
11ax-HE40	MCS0	151	5755	2.492	2.440	96.28	5.641	≤ 26.77
11ax-HE40	MCS0	159	5795	3.229	3.031	96.28	6.306	≤ 26.77
11ax-HE80	MCS0	155	5775	-1.242	-1.031	98.00	1.963	≤ 26.77
11be-EHT20	MCS0	149	5745	5.270	5.341	97.44	8.429	≤ 26.77
11be-EHT20	MCS0	157	5785	5.836	5.705	97.44	8.894	≤ 26.77
11be-EHT20	MCS0	165	5825	5.666	5.617	97.44	8.764	≤ 26.77
11be-EHT40	MCS0	151	5755	2.242	2.239	96.06	5.425	≤ 26.77
11be-EHT40	MCS0	159	5795	2.997	3.000	96.06	6.183	≤ 26.77
11be-EHT80	MCS0	155	5775	-1.178	-0.854	97.23	2.119	≤ 26.77

Note 1:

When EUT duty cycle < 98%, the total PSD (dBm/510 kHz) = $10 \times \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \times \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, the total PSD (dBm/510 kHz) = $10 \times \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\}$.

Note 2: For CDD Mode: PSD Limit (dBm/500 kHz) = 30 - (12.23 - 6) = 23.77 dBm/500 kHz.

For STBC Mode: PSD Limit (dBm/500 kHz) = 30 - (9.23 - 6) = 26.77 dBm/500 kHz.