



Futurecom Systems Group, ULC

DVRS  
RF Safety Booklet

**Document Revisions**

| Rev | Date             | By     | Notes & References                                                         |
|-----|------------------|--------|----------------------------------------------------------------------------|
| R10 | June 30,2017     | AJK/SN | Added APX 8500                                                             |
| R11 | Nov 10, 2017     | AJK/SN | Revised APX8500 Antenna Installation instructions                          |
| R12 | Dec 21,2017      | AJK/SN | Added FCC/ISED Updates                                                     |
| R13 | Nov 20, 2018     | AJK/SN | Revised FCC label, Added APX8500 HP configurations for DVR7/800, UHF, VHF. |
| R14 | January 29, 2020 | AJK/SN | Added APX 4500, APX 2500 configuration for DVR VHF                         |
| R15 | February 5, 2020 | AJK/SN | Added APX 4500, APX2500 configuration for DVR 700                          |
|     |                  |        |                                                                            |
|     |                  |        |                                                                            |
|     |                  |        |                                                                            |
|     |                  |        |                                                                            |

# Product Safety and RF Energy Exposure Booklet for Digital Vehicular Repeater Systems (DVRS)

## ATTENTION!

Before using this equipment, please read this booklet which contains important operating instructions for safe usage, RF energy control and compliance with FCC/ISED exposure limits.

### ***Notes, Attentions, Important***

Throughout this manual, you will see Notes, and Attentions, Important. Their meaning is as follows:



#### **NOTE**

A clarifying statement that expands on the text that follows.



#### **IMPORTANT**

An important statement that should be considered and / or implemented in order to achieve adequate equipment operation.



#### **ATTENTION!**

An instruction that must be followed in insure compliance with the appropriate standards or proper equipment operations



#### **NOTE:**

This equipment has been tested and found to comply with the limits for Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the installation manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

**ATTENTION!**

Changes or modifications not expressly approved by Futurecom Systems Group, ULC could void the User's authority to operate the equipment.

**USA Users:** Do not use the DVRS in the frequency band 406.0 – 406.1MHz. This frequency band is reserved for distress beacons.

## RF EXPOSURE

**ATTENTION!**

This radio is intended for use in occupational / controlled conditions, where users have full knowledge of their exposure and can exercise control over their exposure to meet FCC /ISED limits. This radio device is NOT authorized for general population, consumer, or any other use.

## RADIO OPERATOR



It is the responsibility of the Repeater Operator to ensure that Maximum Permissible Exposure (MPE) limits are observed at all times during repeater transmissions. If this vehicular repeater is used in combination with a separate Mobile radio transmitter, the Repeater operator must ensure at all times that no person comes within the MPE distance from the vehicle body to ensure compliance with the FCC/ISED RF energy exposure limits for the general population.

The minimum lateral distance between all possible personnel and the body of the DVRS equipped vehicle must be as specified in Table 1 (Stand-alone DVR) and Table 2 (DVR interfaced to a Mobile Radio i.e. DVRS).

Failure to observe the MPE distance exclusion area around the antenna may expose persons within this area to RF energy above the FCC exposure limit for bystanders (general population).

| Stand Alone DVR (20W) | Recommended Lateral Distance from Antenna     |
|-----------------------|-----------------------------------------------|
| VHF                   | 82cm (32.3 inches) (up to 50% Tx duty cycle)  |
| UHF 380-512MHz        | 75cm (29.5 inches) (up to 50% Tx duty cycle)  |
| 700MHz                | 73cm (28.7 inches) (up to 100% Tx duty cycle) |
| 800MHz                | 76cm (29.9 inches) (up to 100% Tx duty cycle) |

Table 1 Recommended Lateral Distance - Stand Alone DVR

**NOTE:**

50% Tx duty cycle is defined as Push To Talk (PTT), 50% Talk - 50% Listen.  
100% Tx duty cycle is defined as Push To Talk (PTT), 100% Talk.

| Mobile Radio Rated Power<br>(up to 50% Tx duty cycle) | Recommended Lateral Distance from<br>Vehicle Body |
|-------------------------------------------------------|---------------------------------------------------|
| DVRS with <7 Watt <b>XTL</b> Mobile Radio             | 20 cm (7.9 inches)                                |
| DVRS with 7 to 15 Watt <b>XTL</b> Mobile Radio        | 30 cm (11.8 inches)                               |
| DVRS with 16 to 39 Watt <b>XTL</b> Mobile Radio       | 60 cm (23.6 inches)                               |
| DVRS with 40 to 100 Watt <b>XTL</b> Mobile Radio      | 90 cm (35.4 inches)                               |
| DVRS with up to 100 Watt <b>APX</b> Mobile Radio      | 90 cm (35.4 inches)                               |


**Table 2 Recommended Lateral Distance – DVRS (DVR interfaced to a Mobile Radio)**

### **IMPORTANT**



The maximum allowed gain of the  $\lambda/4$  omni-directional antenna for the Digital Vehicular Repeater (DVR) is Unity (0dBd).

### ***RF Exposure Label***

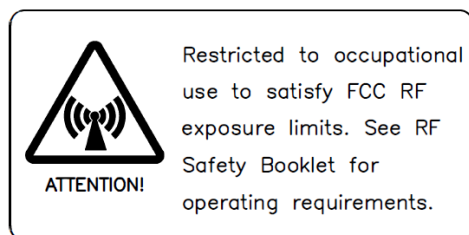

The RF Exposure Label should be affixed in the vehicle beside the mobile radio control head. The label should be in the direct view of the Repeater operator. The label is supplied with the Digital Vehicular Repeater(DVR).

### ***FCC Label***

This device complies with Part 15 of the FCC Rules.  
Operation is subject to the following two conditions:  
1) This device may not cause harmful interference, and  
2) This device must accept any interference received,  
including interference that may cause undesired  
operation.

# Installation Requirements for Compliance with Radio Frequency (RF) Energy Exposure Safety Standards

## **ATTENTION!**



To ensure compliance with RF Energy Safety Standards:

- Install only Futurecom / Motorola approved antennas and accessories and set conducted power into the DVR and Mobile antennas equal to or lower than the approved power levels – refer to **Table 3** (Stand Alone DVR) or **Table 4** (DVR interfaced to XTL Mobile Radio) or **Table 5** (DVR interfaced to APX Mobile Radio).
- Ensure the antenna installation is consistent with the DVR Antenna Installation instructions described in this document as well as with the Mobile Radio Antenna Installation Instructions published in the applicable Motorola Installation Manual.
- Ensure the **Product & RF Safety Booklets 8F083X03(FCC) or 8F083X05(ISED)** enclosed with the Mobile Radio and the DVR are available to the end user upon completion of the installation.

| ANTENNA |          |                   |        | STAND ALONE DVR MODEL                       |                                             |                                            |                                            |                                            |                                        |
|---------|----------|-------------------|--------|---------------------------------------------|---------------------------------------------|--------------------------------------------|--------------------------------------------|--------------------------------------------|----------------------------------------|
| #       | Kit #    | Freq. Range [MHz] | Type   | 700 MHz (20W)<br>(up to 100% Tx duty cycle) | 800 MHz (20W)<br>(up to 100% Tx duty cycle) | 403-430 (20W)<br>(up to 50% Tx duty cycle) | 450-470 (20W)<br>(up to 50% Tx duty cycle) | 470-512 (20W)<br>(up to 50% Tx duty cycle) | VHF (20W)<br>(up to 50% Tx duty cycle) |
| 1       | HAF4016  | 764-870           | ¼ wave | 20W                                         | 20W                                         |                                            |                                            |                                            |                                        |
| 2       | HAE6012A | 380-433           | ¼ wave |                                             |                                             | 20W                                        |                                            |                                            |                                        |
| 3       | HAE4003A | 450-470           | ¼ wave |                                             |                                             |                                            | 20W                                        |                                            |                                        |
| 4       | HAE4004  | 470-512           | ¼ wave |                                             |                                             |                                            |                                            | 20W                                        |                                        |
| 5       | HAD4006  | 136-144           | ¼ wave |                                             |                                             |                                            |                                            |                                            | 20W                                    |
| 6       | HAD4007  | 144-150.8         | ¼ wave |                                             |                                             |                                            |                                            |                                            | 20W                                    |
| 7       | HAD4008  | 150.8-162         | ¼ wave |                                             |                                             |                                            |                                            |                                            | 20W                                    |
| 8       | HAD4009  | 162-174           | ¼ wave |                                             |                                             |                                            |                                            |                                            | 20W                                    |

**Table 3 Approved Stand-Alone DVR Combinations**

## **NOTE:**

Mobile RF conducted antenna power in the tables below denotes up to 50% Tx duty cycle.  
DVR RF conducted antenna power in the tables below denotes up to 100% Tx duty cycle.

**DVR:** 7V083X06 (DQPMDDVR8000P) **Freq Range:** 806-825, 851-870MHz, **Trunk Mounted Antenna:** HAF4016A, 1/4 wave, 0dBd  
**FCC ID:** LO6-DVRS800 **Maximum conducted power delivered to antenna:** DVR (W) / Mobile (W)

| Mobile                                            | Roof Mounted Antenna        | Roof Mounted Antenna        | Roof Mounted Antenna          | Roof Mounted Antenna          | Roof Mounted Antenna          | Roof Mounted Antenna        |
|---------------------------------------------------|-----------------------------|-----------------------------|-------------------------------|-------------------------------|-------------------------------|-----------------------------|
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3806   | HAD4007A,<br>1/4 wave, 0dBd | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd   |                               |                               |                             |
| Max Power: DVR / Mobile                           | 10W / 57W                   | 10W / 57W                   | 10W / 57W                     |                               |                               |                             |
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3808   | HAD4007A,<br>1/4 wave, 0dBd | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd   |                               |                               |                             |
| Max Power: DVR / Mobile                           | 10W / 57W                   | 10W / 57W                   | 10W / 57W                     |                               |                               |                             |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4870 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd |                               |                             |
| Max Power: DVR / Mobile                           | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                    |                               |                             |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4862 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd |                               |                             |
| Max Power: DVR / Mobile                           | 10W / 48W                   | 10W / 48W                   | 10W / 48W                     | 10W / 48W                     |                               |                             |
| XTL5000 UHF R2(450-512MHz)<br>FCC ID: AZ492FT5827 | HAE6016A,<br>1/4 wave, 0dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd | HAE4012A,<br>1/4 wave, 3.5dBd | HAE4013A,<br>1/4 wave, 3.5dBd | HAE4004A,<br>1/4 wave, 0dBd |
| Max Power: DVR / Mobile                           | 10W / 54W                   | 10W / 54W                   | 10W / 54W                     | 10W / 54W                     | 10W / 54W                     | 10W / 54W                   |
| XTL5000 700/800MHz<br>FCC ID: AZ492FT5823         | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd   | HAF4017A,<br>1/4 wave, 3dBd   |                               |                             |
| Max Power: DVR / Mobile                           | 10W / 42W                   | 10W / 42W                   | 10W / 42W                     | 10W / 42W                     |                               |                             |

**Table 4A Approved 800 DVRS Configurations – XTL5000 / XTL2500**

**DVR:** 7V083X05 (DQPMDDVR7000P) **Freq Range:** 764-776, 794-806MHz, **Trunk Mounted Antenna:** HAF4016A, 1/4 wave, 0dBd  
**FCC ID:** LO6-DVRS700 **Maximum conducted power delivered to antenna:** DVR (W) / Mobile (W)

| Mobile                                            | Roof Mounted Antenna        | Roof Mounted Antenna        | Roof Mounted Antenna          | Roof Mounted Antenna          | Roof Mounted Antenna          | Roof Mounted Antenna        |
|---------------------------------------------------|-----------------------------|-----------------------------|-------------------------------|-------------------------------|-------------------------------|-----------------------------|
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3806   | HAD4007A,<br>1/4 wave, 0dBd | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd   |                               |                               |                             |
| Max Power: DVR / Mobile                           | 5W / 57W                    | 5W / 57W                    | 5W / 57W                      |                               |                               |                             |
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3808   | HAD4007A,<br>1/4 wave, 0dBd | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd   | RAD4010A,<br>1/2 wave, 3dBd   |                               |                             |
| Max Power: DVR / Mobile                           | 5W / 57W                    | 5W / 57W                    | 5W / 57W                      | 20W / 120W *                  |                               |                             |
| * XTL5000 VHF (136-174MHz)                        |                             |                             |                               |                               |                               |                             |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4870 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd |                               |                             |
| Max Power: DVR / Mobile                           | 5W / 120W                   | 5W / 120W                   | 5W / 120W                     | 5W / 120W                     |                               |                             |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4862 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd |                               |                             |
| Max Power: DVR / Mobile                           | 5W / 48W                    | 5W / 48W                    | 5W / 48W                      | 5W / 48W                      |                               |                             |
| XTL5000 UHF R2(450-512MHz)<br>FCC ID: AZ492FT4867 | HAE6016A,<br>1/4 wave, 0dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd | HAE4012A,<br>1/4 wave, 3.5dBd | HAE4013A,<br>1/4 wave, 3.5dBd | HAE4004A,<br>1/4 wave, 0dBd |
| Max Power: DVR / Mobile                           | 5W / 54W                    | 5W / 54W                    | 5W / 54W                      | 5W / 54W                      | 5W / 54W                      | 5W / 57W                    |
| XTL5000 700/800MHz<br>FCC ID: AZ492FT5823         | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd   | HAF4017A,<br>1/4 wave, 3dBd   |                               |                             |
| Max Power: DVR / Mobile                           | 5W / 42W                    | 5W / 42W                    | 5W / 42W                      | 5W / 42W                      |                               |                             |

**Table 4B Approved 700 DVRS Configurations – XTL5000 / XTL2500**

**DVR:** 7V083X04 (DQPM DVR6000P) **Freq Range:** 470-512MHz, **Trunk Mounted Antenna:** HAE4004A, 1/4 wave, 0dBd, HAE6016A, 1/4 wave, 0dBd  
**FCC ID:** LO6-DVRSUHF **Maximum conducted power delivered to antenna:** DVR (W) / Mobile (W)

| Mobile                                                                       | Roof Mounted Antenna                      | Roof Mounted Antenna                      | Roof Mounted Antenna                       | Roof Mounted Antenna                        | Roof Mounted Antenna                       | Roof Mounted Antenna                     |
|------------------------------------------------------------------------------|-------------------------------------------|-------------------------------------------|--------------------------------------------|---------------------------------------------|--------------------------------------------|------------------------------------------|
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3806<br>Max Power: DVR / Mobile   | HAD4007A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4008A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4009A,<br>1/4 wave, 0dBd<br>10W / 57W   |                                             |                                            |                                          |
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3808<br>Max Power: DVR / Mobile   | HAD4007A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4008A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4009A,<br>1/4 wave, 0dBd<br>10W / 57W   |                                             |                                            |                                          |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4870<br>Max Power: DVR / Mobile | HAE6012A,<br>1/4 wave, 0dBd<br>10W / 120W | HAE6013A,<br>1/2 wave, 2dBd<br>10W / 120W | HAE4003A,<br>1/4 wave, 0dBd<br>10W / 120W  | HAE4011A,<br>1/2 wave, 3.5dBd<br>10W / 120W |                                            |                                          |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4862<br>Max Power: DVR / Mobile | HAE6012A,<br>1/4 wave, 0dBd<br>10W / 48W  | HAE6013A,<br>1/2 wave, 2dBd<br>10W / 48W  | HAE4003A,<br>1/4 wave, 0dBd<br>10W / 48W   | HAE4011A,<br>1/2 wave, 3.5dBd<br>10W / 48W  |                                            |                                          |
| XTL5000 UHF R2(450-512MHz)<br>FCC ID: AZ492FT4867<br>Max Power: DVR / Mobile | HAE6016A,<br>1/4 wave, 0dBd<br>10W / 54W  | HAE4003A,<br>1/4 wave, 0dBd<br>10W / 54W  | HAE4011A,<br>1/2 wave, 3.5dBd<br>10W / 54W | HAE4012A,<br>1/4 wave, 3.5dBd<br>10W / 54W  | HAE4013A,<br>1/4 wave, 3.5dBd<br>10W / 54W | HAE4004A,<br>1/4 wave, 0dBd<br>10W / 54W |
| XTL5000 700/800MHz<br>FCC ID: AZ492FT5823<br>Max Power: DVR / Mobile         | HAF4013A,<br>1/4 wave, 3dBd<br>10W / 42W  | HAF4014A,<br>1/4 wave, 3dBd<br>10W / 42W  | HAF4016A,<br>1/4 wave, 0dBd<br>10W / 42W   | HAF4017A,<br>1/4 wave, 3dBd<br>10W / 42W    |                                            |                                          |

**Table 4C Approved 470-512MHz DVRS Configurations – XTL5000 / XTL2500**

**DVR:** 7V083X03 (DQPM DVR5000P) **Freq Range:** 450-470MHz, **Trunk Mounted Antenna:** HAE4003A, 1/4 wave, 0dBd, HAE6016A, 1/4 wave, 0dBd  
**FCC ID:** LO6-DVRSUHF **Maximum conducted power delivered to antenna:** DVR (W) / Mobile (W)

| Mobile                                                                       | Roof Mounted Antenna                      | Roof Mounted Antenna                      | Roof Mounted Antenna                       | Roof Mounted Antenna                        | Roof Mounted Antenna                       | Roof Mounted Antenna                     |
|------------------------------------------------------------------------------|-------------------------------------------|-------------------------------------------|--------------------------------------------|---------------------------------------------|--------------------------------------------|------------------------------------------|
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3806<br>Max Power: DVR / Mobile   | HAD4007A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4008A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4009A,<br>1/4 wave, 0dBd<br>10W / 57W   |                                             |                                            |                                          |
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3808<br>Max Power: DVR / Mobile   | HAD4007A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4008A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4009A,<br>1/4 wave, 0dBd<br>10W / 57W   |                                             |                                            |                                          |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4870<br>Max Power: DVR / Mobile | HAE6012A,<br>1/4 wave, 0dBd<br>10W / 120W | HAE6013A,<br>1/2 wave, 2dBd<br>10W / 120W | HAE4003A,<br>1/4 wave, 0dBd<br>10W / 120W  | HAE4011A,<br>1/2 wave, 3.5dBd<br>10W / 120W |                                            |                                          |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4862<br>Max Power: DVR / Mobile | HAE6012A,<br>1/4 wave, 0dBd<br>10W / 48W  | HAE6013A,<br>1/2 wave, 2dBd<br>10W / 48W  | HAE4003A,<br>1/4 wave, 0dBd<br>10W / 48W   | HAE4011A,<br>1/2 wave, 3.5dBd<br>10W / 48W  |                                            |                                          |
| XTL5000 UHF R2(450-512MHz)<br>FCC ID: AZ492FT4867<br>Max Power: DVR / Mobile | HAE6016A,<br>1/4 wave, 0dBd<br>10W / 54W  | HAE4003A,<br>1/4 wave, 0dBd<br>10W / 54W  | HAE4011A,<br>1/2 wave, 3.5dBd<br>10W / 54W | HAE4012A,<br>1/4 wave, 3.5dBd<br>10W / 54W  | HAE4013A,<br>1/4 wave, 3.5dBd<br>10W / 54W | HAE4004A,<br>1/4 wave, 0dBd<br>10W / 54W |
| XTL5000 700/800MHz<br>FCC ID: AZ492FT5823<br>Max Power: DVR / Mobile         | HAF4013A,<br>1/4 wave, 3dBd<br>10W / 42W  | HAF4014A,<br>1/4 wave, 3dBd<br>10W / 42W  | HAF4016A,<br>1/4 wave, 0dBd<br>10W / 42W   | HAF4017A,<br>1/4 wave, 3dBd<br>10W / 42W    |                                            |                                          |

**Table 4D Approved 450-470MHz DVRS Configurations – XTL5000 / XTL2500**

**DVR:** 7V083X07 (DQPM DVR4000P) **Freq Range:** 380-430MHz, **Trunk Mounted Antenna:** HAE6012A, 1/4 wave, 0dBd  
**FCC ID:** LO6-DVRSUHF **Maximum conducted power delivered to antenna:** DVR (W) / Mobile (W)

| Mobile                                                                       | Roof Mounted Antenna                      | Roof Mounted Antenna                      | Roof Mounted Antenna                       | Roof Mounted Antenna                        | Roof Mounted Antenna                       | Roof Mounted Antenna                     |
|------------------------------------------------------------------------------|-------------------------------------------|-------------------------------------------|--------------------------------------------|---------------------------------------------|--------------------------------------------|------------------------------------------|
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3806<br>Max Power: DVR / Mobile   | HAD4007A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4008A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4009A,<br>1/4 wave, 0dBd<br>10W / 57W   |                                             |                                            |                                          |
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3808<br>Max Power: DVR / Mobile   | HAD4007A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4008A,<br>1/4 wave, 0dBd<br>10W / 57W  | HAD4009A,<br>1/4 wave, 0dBd<br>10W / 57W   |                                             |                                            |                                          |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4870<br>Max Power: DVR / Mobile | HAE6012A,<br>1/4 wave, 0dBd<br>10W / 120W | HAE6013A,<br>1/2 wave, 2dBd<br>10W / 120W | HAE4003A,<br>1/4 wave, 0dBd<br>10W / 120W  | HAE4011A,<br>1/2 wave, 3.5dBd<br>10W / 120W |                                            |                                          |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4862<br>Max Power: DVR / Mobile | HAE6012A,<br>1/4 wave, 0dBd<br>10W / 48W  | HAE6013A,<br>1/2 wave, 2dBd<br>10W / 48W  | HAE4003A,<br>1/4 wave, 0dBd<br>10W / 48W   | HAE4011A,<br>1/2 wave, 3.5dBd<br>10W / 48W  |                                            |                                          |
| XTL5000 UHF R2(450-512MHz)<br>FCC ID: AZ492FT4867<br>Max Power: DVR / Mobile | HAE6016A,<br>1/4 wave, 0dBd<br>10W / 54W  | HAE4003A,<br>1/4 wave, 0dBd<br>10W / 54W  | HAE4011A,<br>1/2 wave, 3.5dBd<br>10W / 54W | HAE4012A,<br>1/4 wave, 3.5dBd<br>10W / 54W  | HAE4013A,<br>1/4 wave, 3.5dBd<br>10W / 54W | HAE4004A,<br>1/4 wave, 0dBd<br>10W / 54W |
| XTL5000 700/800MHz<br>FCC ID: AZ492FT5823<br>Max Power: DVR / Mobile         | HAF4013A,<br>1/4 wave, 3dBd<br>10W / 42W  | HAF4014A,<br>1/4 wave, 3dBd<br>10W / 42W  | HAF4016A,<br>1/4 wave, 0dBd<br>10W / 42W   | HAF4017A,<br>1/4 wave, 3dBd<br>10W / 42W    |                                            |                                          |

**Table 4E Approved 380-430MHz DVRS Configurations – XTL5000 / XTL2500**

**DVR:** 7V083X01 (DQPM DVR3000P) **Freq Range:** 136-174MHz, **Trunk Mounted Antenna:** HAD4006A, 1/4 wave, 0dBd, HAD4007A, 1/4 wave, 0dBd, HAD4008A, 1/4 wave, 0dBd, HAD4009A, 1/4 wave, 0dBd  
**FCC ID:** LO6-DVRSVHF **Maximum conducted power delivered to antenna:** DVR (W) / Mobile (W)

| Mobile                                                                       | Roof Mounted Antenna                     | Roof Mounted Antenna                     | Roof Mounted Antenna                      | Roof Mounted Antenna                       | Roof Mounted Antenna                      | Roof Mounted Antenna                    |
|------------------------------------------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|--------------------------------------------|-------------------------------------------|-----------------------------------------|
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3806<br>Max Power: DVR / Mobile   | HAD4007A,<br>1/4 wave, 0dBd<br>6W / 57W  | HAD4008A,<br>1/4 wave, 0dBd<br>6W / 57W  | HAD4009A,<br>1/4 wave, 0dBd<br>6W / 57W   |                                            |                                           |                                         |
| XTL5000 VHF (147-174MHz)<br>FCC ID: AZ492FT3808<br>Max Power: DVR / Mobile   | HAD4007A,<br>1/4 wave, 0dBd<br>6W / 57W  | HAD4008A,<br>1/4 wave, 0dBd<br>6W / 57W  | HAD4009A,<br>1/4 wave, 0dBd<br>6W / 57W   |                                            |                                           |                                         |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4870<br>Max Power: DVR / Mobile | HAE6012A,<br>1/4 wave, 0dBd<br>6W / 120W | HAE6013A,<br>1/2 wave, 2dBd<br>6W / 120W | HAE4003A,<br>1/4 wave, 0dBd<br>6W / 120W  | HAE4011A,<br>1/2 wave, 3.5dBd<br>6W / 120W |                                           |                                         |
| XTL5000 UHF R1(380-470MHz)<br>FCC ID: AZ492FT4862<br>Max Power: DVR / Mobile | HAE6012A,<br>1/4 wave, 0dBd<br>6W / 48W  | HAE6013A,<br>1/2 wave, 2dBd<br>6W / 48W  | HAE4003A,<br>1/4 wave, 0dBd<br>6W / 48W   | HAE4011A,<br>1/2 wave, 3.5dBd<br>6W / 48W  |                                           |                                         |
| XTL5000 UHF R2(450-512MHz)<br>FCC ID: AZ492FT4867<br>Max Power: DVR / Mobile | HAE6016A,<br>1/4 wave, 0dBd<br>6W / 54W  | HAE4003A,<br>1/4 wave, 0dBd<br>6W / 54W  | HAE4011A,<br>1/2 wave, 3.5dBd<br>6W / 54W | HAE4012A,<br>1/4 wave, 3.5dBd<br>6W / 54W  | HAE4013A,<br>1/4 wave, 3.5dBd<br>6W / 54W | HAE4004A,<br>1/4 wave, 0dBd<br>6W / 54W |
| XTL5000 700/800MHz<br>FCC ID: AZ492FT5823<br>Max Power: DVR / Mobile         | HAF4013A,<br>1/4 wave, 3dBd<br>6W / 42W  | HAF4014A,<br>1/4 wave, 3dBd<br>6W / 42W  | HAF4016A,<br>1/4 wave, 0dBd<br>6W / 42W   | HAF4017A,<br>1/4 wave, 3dBd<br>6W / 42W    |                                           |                                         |

**Table 4F Approved 136-174MHz DVRS Configurations – XTL5000 / XTL2500**

DVR: 7V083X06  
(DQPM DVR8000P)  
FCC ID: LO6-DVRS800

Freq Range: 806-825, 851-870MHz, Trunk Mounted Antenna: HAF4016A, 1/4 wave, 0dBd

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                                      | Roof Mounted Antenna        | Roof Mounted Antenna        | Roof Mounted Antenna          | Roof Mounted Antenna          | Roof Mounted Antenna        | Roof Mounted Antenna          | Roof Mounted Antenna          | Roof Mounted Antenna        |
|-------------------------------------------------------------|-----------------------------|-----------------------------|-------------------------------|-------------------------------|-----------------------------|-------------------------------|-------------------------------|-----------------------------|
| APX6500/ APX7500 VHF (136-174MHz)<br>FCC ID: A2492FT3824    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd   |                               |                             |                               |                               |                             |
| Max Power: DVR / Mobile                                     | 10W / 60W                   | 10W / 60W                   | 10W / 60W                     |                               |                             |                               |                               |                             |
| APX6500/ APX7500 700/800MHz<br>FCC ID: A2492FT5858          | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd   | HAF4017A,<br>1/4 wave, 3dBd   |                             |                               |                               |                             |
| Max Power: DVR / Mobile                                     | 10W / 42W                   | 10W / 42W                   | 10W / 42W                     | 10W / 42W                     |                             |                               |                               |                             |
| APX6500/ APX7500 VHF (136-174MHz)<br>FCC ID: A2492FT3821    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd   |                               |                             |                               |                               |                             |
| Max Power: DVR / Mobile                                     | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    |                               |                             |                               |                               |                             |
| APX6500/ APX7500 UHF R1 (380-470MHz)<br>FCC ID: A2492FT4894 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd |                             |                               |                               |                             |
| Max Power: DVR / Mobile                                     | 10W / 48W                   | 10W / 48W                   | 10W / 48W                     | 10W / 48W                     |                             |                               |                               |                             |
| APX6500/ APX7500 UHF R1 (380-470MHz)<br>FCC ID: A2492FT4897 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd |                             |                               |                               |                             |
| Max Power: DVR / Mobile                                     | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                    |                             |                               |                               |                             |
| APX6500/ APX7500 UHF R2 (450-520MHz)<br>FCC ID: A2492FT4896 | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd | HAE4004A,<br>1/4 wave, 0dBd   |                             |                               |                               |                             |
| Max Power: DVR / Mobile                                     | 10W / 54W                   | 10W / 54W                   | 10W / 54W                     | 10W / 54W                     |                             |                               |                               |                             |
| APX7500 7/800 MHz 35W - VHF 50W<br>FCC ID: A2492FT7037      | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd   | HAF4017A,<br>1/4 wave, 3dBd   | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd   | HAD4021A,<br>1/4 wave, 0dBd   |                             |
| Max Power: DVR / Mobile                                     | 10W / 42W                   | 10W / 42W                   | 10W / 42W                     | 10W / 42W                     | 10W / 60W                   | 10W / 60W                     | 10W / 60W                     |                             |
| APX7500 VHF 100W - 7/800 MHz 35W<br>FCC ID: A2492FT7035     | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd   | HAF4013A,<br>1/4 wave, 3dBd   | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd   | HAF4017A,<br>1/4 wave, 3dBd   |                             |
| Max Power: DVR / Mobile                                     | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 42W                     | 10W / 42W                   | 10W / 42W                     | 10W / 42W                     |                             |
| APX7500 UHF R1 40W - 7/800 MHz 35W<br>FCC ID: A2492FT7043   | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd   | HAF4016A,<br>1/4 wave, 0dBd   | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                     | 10W / 48W                   | 10W / 48W                   | 10W / 48W                     | 10W / 48W                     | 10W / 42W                   | 10W / 42W                     | 10W / 42W                     | 10W / 42W                   |
| APX7500 UHF R1 100W - 7/800 MHz 35W<br>FCC ID: A2492FT7048  | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd   | HAF4016A,<br>1/4 wave, 0dBd   | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                     | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                    | 10W / 42W                   | 10W / 42W                     | 10W / 42W                     | 10W / 42W                   |
| APX7500 UHF R2 45W 7/800 MHz 35W<br>FCC ID: A2492FT7044     | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd | HAE4004A,<br>1/4 wave, 0dBd   | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd   | HAF4016A,<br>1/4 wave, 0dBd   | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                     | 10W / 54W                   | 10W / 54W                   | 10W / 54W                     | 10W / 54W                     | 10W / 42W                   | 10W / 42W                     | 10W / 42W                     | 10W / 42W                   |
| APX7500 VHF 50W - UHF R1 40W<br>FCC ID: A2492FT4895         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd   | HAE6012A,<br>1/4 wave, 0dBd   | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd |                             |
| Max Power: DVR / Mobile                                     | 10W / 60W                   | 10W / 60W                   | 10W / 60W                     | 10W / 48W                     | 10W / 48W                   | 10W / 48W                     | 10W / 48W                     |                             |
| APX7500 VHF 100W - UHF R1 100W<br>FCC ID: A2492FT4898       | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd   | HAE6012A,<br>1/4 wave, 0dBd   | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd |                             |
| Max Power: DVR / Mobile                                     | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                    | 10W / 120W                  | 10W / 120W                    | 10W / 120W                    |                             |
| APX7500 VHF 50W - UHF R2 45W<br>FCC ID: A2492FT7047         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd   | HAE6015A,<br>1/2 wave, 2dBd   | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd | HAE4004A,<br>1/4 wave, 0dBd   |                             |
| Max Power: DVR / Mobile                                     | 10W / 60W                   | 10W / 60W                   | 10W / 60W                     | 10W / 54W                     | 10W / 54W                   | 10W / 54W                     | 10W / 54W                     |                             |
| APX6500 UHF R1 40W - UHF R2 45W<br>FCC ID: A2492FT4904      | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd | HAE4004A,<br>1/4 wave, 0dBd |
| Max Power: DVR / Mobile                                     | 10W / 48W                   | 10W / 48W                   | 10W / 48W                     | 10W / 48W                     | 10W / 54W                   | 10W / 54W                     | 10W / 54W                     | 10W / 54W                   |

Table 5A Approved 800 DVRS Configurations – APX6500 / APX7500

DVR: 7V083X05  
(DQPMVDVR7000P)  
FCC ID: LO6-DVR5700

Freq Range: 764-776, 794-806MHz, Trunk Mounted Antenna: HAF4016A, 1/4 wave, 0dBd

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                                         | Antenna                     | Antenna                     | Antenna                          | Antenna                          | Antenna                     | Antenna                          | Antenna                          | Antenna                     |
|----------------------------------------------------------------|-----------------------------|-----------------------------|----------------------------------|----------------------------------|-----------------------------|----------------------------------|----------------------------------|-----------------------------|
| APX6500/ APX7500 VHF<br>(136-174MHz)<br>FCC ID: AZ492FT3824    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 5W / 60W                    | 5W / 60W                    | 5W / 60W                         |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500<br>700/800MHz<br>FCC ID: AZ492FT5858          | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 5W / 42W                    | 5W / 42W                    | 5W / 42W                         | 5W / 42W                         |                             |                                  |                                  |                             |
| APX6500/ APX7500 VHF<br>(136-174MHz)<br>FCC ID: AZ492FT3821    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 5W / 120W                   | 5W / 120W                   | 5W / 120W                        |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R1<br>(380-470MHz)<br>FCC ID: AZ492FT4894 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 5W / 48W                    | 5W / 48W                    | 5W / 48W                         | 5W / 48W                         |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R1<br>(380-470MHz)<br>FCC ID: AZ492FT4897 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 5W / 120W                   | 5W / 120W                   | 5W / 120W                        | 5W / 120W                        |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R2<br>(450-520MHz)<br>FCC ID: AZ492FT4896 | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 5W / 54W                    | 5W / 54W                    | 5W / 54W                         | 5W / 54W                         |                             |                                  |                                  |                             |
| APX7500 7/800 MHz 35W -<br>VHF 50W<br>FCC ID: AZ492FT7037      | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd      | HAD4021A,<br>1/4 wave, 0dBd      |                             |
| Max Power: DVR / Mobile                                        | 5W / 42W                    | 5W / 42W                    | 5W / 42W                         | 5W / 42W                         | 5W / 60W                    | 5W / 60W                         | 5W / 60W                         |                             |
| APX7500 VHF 100W - 7/800<br>MHz 35W<br>FCC ID: AZ492FT7035     | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAF4013A,<br>1/4 wave, 3dBd      | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |
| Max Power: DVR / Mobile                                        | 5W / 120W                   | 5W / 120W                   | 5W / 120W                        | 5W / 42W                         | 5W / 42W                    | 5W / 42W                         | 5W / 42W                         |                             |
| APX7500 UHF R1 40W -<br>7/800 MHz 35W<br>FCC ID: AZ492FT7043   | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 5W / 48W                    | 5W / 48W                    | 5W / 48W                         | 5W / 48W                         | 5W / 42W                    | 5W / 42W                         | 5W / 42W                         | 5W / 42W                    |
| APX7500 UHF R1 100W -<br>7/800 MHz 35W<br>FCC ID: AZ492FT7048  | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 5W / 120W                   | 5W / 120W                   | 5W / 120W                        | 5W / 120W                        | 5W / 42W                    | 5W / 42W                         | 5W / 42W                         | 5W / 42W                    |
| APX7500 UHF R2 45W<br>7/800 MHz 35W<br>FCC ID: AZ492FT7044     | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 5W / 54W                    | 5W / 54W                    | 5W / 54W                         | 5W / 54W                         | 5W / 42W                    | 5W / 42W                         | 5W / 42W                         | 5W / 42W                    |
| APX7500 VHF 50W - UHF<br>R1 40W<br>FCC ID: AZ492FT4895         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6012A,<br>1/4 wave, 0dBd      | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |
| Max Power: DVR / Mobile                                        | 5W / 60W                    | 5W / 60W                    | 5W / 60W                         | 5W / 48W                         | 5W / 48W                    | 5W / 48W                         | 5W / 48W                         |                             |
| APX7500 VHF 100W - UHF<br>R1 100W<br>FCC ID: AZ492FT4898       | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6012A,<br>1/4 wave, 0dBd      | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |
| Max Power: DVR / Mobile                                        | 5W / 120W                   | 5W / 120W                   | 5W / 120W                        | 5W / 120W                        | 5W / 120W                   | 5W / 120W                        | 5W / 120W                        |                             |
| APX7500 VHF 50W - UHF<br>R2 45W<br>FCC ID: AZ492FT7047         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6015A,<br>1/2 wave, 2dBd      | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      |                             |
| Max Power: DVR / Mobile                                        | 5W / 60W                    | 5W / 60W                    | 5W / 60W                         | 5W / 54W                         | 5W / 54W                    | 5W / 54W                         | 5W / 54W                         |                             |
| APX6500 UHF R1 40W -<br>UHF R2 45W<br>FCC ID: AZ492FT4904      | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd |
| Max Power: DVR / Mobile                                        | 5W / 48W                    | 5W / 48W                    | 5W / 48W                         | 5W / 48W                         | 5W / 54W                    | 5W / 54W                         | 5W / 54W                         | 5W / 54W                    |

Table 5B Approved 700 DVRS Configurations – APX6500 / APX7500

DVR: 7V083X07  
(DQPM DVR4000P)  
FCC ID: LO6-DVRSUHF

Freq Range: 380-430MHz, Trunk Mounted Antenna: HAE6012A, 1/4 wave, 0dBd

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                                         | Antenna                     | Antenna                     | Antenna                          | Antenna                          | Antenna                     | Antenna                          | Antenna                          | Antenna                     |
|----------------------------------------------------------------|-----------------------------|-----------------------------|----------------------------------|----------------------------------|-----------------------------|----------------------------------|----------------------------------|-----------------------------|
| APX6500/ APX7500 VHF<br>(136-174MHz)<br>FCC ID: AZ492FT3824    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 60W                   | 10W / 60W                   | 10W / 60W                        |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500<br>700/800MHz<br>FCC ID: AZ492FT5858          | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 42W                   | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        |                             |                                  |                                  |                             |
| APX6500/ APX7500 VHF<br>(136-174MHz)<br>FCC ID: AZ492FT3821    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R1<br>(380-470MHz)<br>FCC ID: AZ492FT4894 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 48W                   | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R1<br>(380-470MHz)<br>FCC ID: AZ492FT4897 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R2<br>(450-520MHz)<br>FCC ID: AZ492FT4896 | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 54W                   | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        |                             |                                  |                                  |                             |
| APX7500 7/800 MHz 35W -<br>VHF 50W<br>FCC ID: AZ492FT7037      | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd      | HAD4021A,<br>1/4 wave, 0dBd      |                             |
| Max Power: DVR / Mobile                                        | 10W / 42W                   | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 60W                   | 10W / 60W                        | 10W / 60W                        |                             |
| APX7500 VHF 100W - 7/800<br>MHz 35W<br>FCC ID: AZ492FT7035     | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAF4013A,<br>1/4 wave, 3dBd      | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 42W                        | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        |                             |
| APX7500 UHF R1 40W -<br>7/800 MHz 35W<br>FCC ID: AZ492FT7043   | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 10W / 48W                   | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 42W                   |
| APX7500 UHF R1 100W -<br>7/800 MHz 35W<br>FCC ID: AZ492FT7048  | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 42W                   |
| APX7500 UHF R2 45W<br>7/800 MHz 35W<br>FCC ID: AZ492FT7044     | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 10W / 54W                   | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 42W                   |
| APX7500 VHF 50W - UHF<br>R1 40W<br>FCC ID: AZ492FT4895         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6012A,<br>1/4 wave, 0dBd      | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |
| Max Power: DVR / Mobile                                        | 10W / 60W                   | 10W / 60W                   | 10W / 60W                        | 10W / 48W                        | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        |                             |
| APX7500 VHF 100W - UHF<br>R1 100W<br>FCC ID: AZ492FT4898       | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6012A,<br>1/4 wave, 0dBd      | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       |                             |
| APX7500 VHF 50W - UHF<br>R2 45W<br>FCC ID: AZ492FT7047         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6015A,<br>1/2 wave, 2dBd      | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      |                             |
| Max Power: DVR / Mobile                                        | 10W / 60W                   | 10W / 60W                   | 10W / 60W                        | 10W / 54W                        | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        |                             |
| APX6500 UHF R1 40W -<br>UHF R2 45W<br>FCC ID: AZ492FT4904      | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd |
| Max Power: DVR / Mobile                                        | 10W / 48W                   | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        | 10W / 54W                   |

Table 5C Approved UHF R1 DVRS Configurations – APX6500 / APX7500

DVR: 7V083X03  
 (DQPM DVRS5000P)  
 FCC ID: LO6-DVRSUHF

Freq Range: 450-470MHz, Trunk Mounted Antenna: HAE4003A, 1/4 wave, 0dBd; HAE6016A,  
 1/4 wave, 0 dBd (HAE6016A offered only with DVR/ XTL combination)

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                                         | Antenna                     | Antenna                     | Antenna                          | Antenna                          | Antenna                     | Antenna                          | Antenna                          | Antenna                     |
|----------------------------------------------------------------|-----------------------------|-----------------------------|----------------------------------|----------------------------------|-----------------------------|----------------------------------|----------------------------------|-----------------------------|
| APX6500/ APX7500 VHF<br>(136-174MHz)<br>FCC ID: AZ492FT3824    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 60W                   | 10W / 60W                   | 10W / 60W                        |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500<br>700/800MHz<br>FCC ID: AZ492FT5858          | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 42W                   | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        |                             |                                  |                                  |                             |
| APX6500/ APX7500 VHF<br>(136-174MHz)<br>FCC ID: AZ492FT3821    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R1<br>(380-470MHz)<br>FCC ID: AZ492FT4894 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 48W                   | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R1<br>(380-470MHz)<br>FCC ID: AZ492FT4897 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R2<br>(450-520MHz)<br>FCC ID: AZ492FT4896 | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 54W                   | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        |                             |                                  |                                  |                             |
| APX7500 7/800 MHz 35W -<br>VHF 50W<br>FCC ID: AZ492FT7037      | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd      | HAD4021A,<br>1/4 wave, 0dBd      |                             |
| Max Power: DVR / Mobile                                        | 10W / 42W                   | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 60W                   | 10W / 60W                        | 10W / 60W                        |                             |
| APX7500 VHF 100W - 7/800<br>MHz 35W<br>FCC ID: AZ492FT7035     | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAF4013A,<br>1/4 wave, 3dBd      | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 42W                        | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        |                             |
| APX7500 UHF R1 40W -<br>7/800 MHz 35W<br>FCC ID: AZ492FT7043   | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 10W / 48W                   | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 42W                   |
| APX7500 UHF R1 100W -<br>7/800 MHz 35W<br>FCC ID: AZ492FT7048  | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 42W                   |
| APX7500 UHF R2 45W<br>7/800 MHz 35W<br>FCC ID: AZ492FT7044     | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 10W / 54W                   | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 42W                   |
| APX7500 VHF 50W - UHF<br>R1 40W<br>FCC ID: AZ492FT4895         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6012A,<br>1/4 wave, 0dBd      | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |
| Max Power: DVR / Mobile                                        | 10W / 60W                   | 10W / 60W                   | 10W / 60W                        | 10W / 48W                        | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        |                             |
| APX7500 VHF 100W - UHF<br>R1 100W<br>FCC ID: AZ492FT4898       | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6012A,<br>1/4 wave, 0dBd      | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       |                             |
| APX7500 VHF 50W - UHF<br>R2 45W<br>FCC ID: AZ492FT7047         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6015A,<br>1/2 wave, 2dBd      | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      |                             |
| Max Power: DVR / Mobile                                        | 10W / 60W                   | 10W / 60W                   | 10W / 60W                        | 10W / 54W                        | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        |                             |
| APX6500 UHF R1 40W -<br>UHF R2 45W<br>FCC ID: AZ492FT4904      | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd |
| Max Power: DVR / Mobile                                        | 10W / 48W                   | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        | 10W / 54W                   |

Table 5D Approved UHF R2 DVRS Configurations – APX6500 / APX7500

DVR: 7V083X04  
(DQPMMDVR6000P)  
FCC ID: LO6-DVRSUHF

Freq Range: 470-512MHz, Trunk Mounted Antenna: HAE4004A, 1/4 wave, 0dBd; HAE6016A,  
1/4 wave, 0 dBd (HAE6016A offered only with DVR/ XTL combination)  
Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                                         | Antenna                     | Antenna                     | Antenna                          | Antenna                          | Antenna                     | Antenna                          | Antenna                          | Antenna                     |
|----------------------------------------------------------------|-----------------------------|-----------------------------|----------------------------------|----------------------------------|-----------------------------|----------------------------------|----------------------------------|-----------------------------|
| APX6500/ APX7500 VHF<br>(136-174MHz)<br>FCC ID: AZ492FT3824    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 60W                   | 10W / 60W                   | 10W / 60W                        |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500<br>700/800MHz<br>FCC ID: AZ492FT5858          | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 42W                   | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        |                             |                                  |                                  |                             |
| APX6500/ APX7500 VHF<br>(136-174MHz)<br>FCC ID: AZ492FT3821    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R1<br>(380-470MHz)<br>FCC ID: AZ492FT4894 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 48W                   | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R1<br>(380-470MHz)<br>FCC ID: AZ492FT4897 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R2<br>(450-520MHz)<br>FCC ID: AZ492FT4896 | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 10W / 54W                   | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        |                             |                                  |                                  |                             |
| APX7500 7/800 MHz 35W -<br>VHF 50W<br>FCC ID: AZ492FT7037      | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd      | HAD4021A,<br>1/4 wave, 0dBd      |                             |
| Max Power: DVR / Mobile                                        | 10W / 42W                   | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 60W                   | 10W / 60W                        | 10W / 60W                        |                             |
| APX7500 VHF 100W - 7/800<br>MHz 35W<br>FCC ID: AZ492FT7035     | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAF4013A,<br>1/4 wave, 3dBd      | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 42W                        | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        |                             |
| APX7500 UHF R1 40W -<br>7/800 MHz 35W<br>FCC ID: AZ492FT7043   | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 10W / 48W                   | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 42W                   |
| APX7500 UHF R1 100W -<br>7/800 MHz 35W<br>FCC ID: AZ492FT7048  | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 42W                   |
| APX7500 UHF R2 45W<br>7/800 MHz 35W<br>FCC ID: AZ492FT7044     | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd |
| Max Power: DVR / Mobile                                        | 10W / 54W                   | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        | 10W / 42W                   | 10W / 42W                        | 10W / 42W                        | 10W / 42W                   |
| APX7500 VHF 50W - UHF<br>R1 40W<br>FCC ID: AZ492FT4895         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6012A,<br>1/4 wave, 0dBd      | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |
| Max Power: DVR / Mobile                                        | 10W / 60W                   | 10W / 60W                   | 10W / 60W                        | 10W / 48W                        | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        |                             |
| APX7500 VHF 100W - UHF<br>R1 100W<br>FCC ID: AZ492FT4898       | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6012A,<br>1/4 wave, 0dBd      | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |
| Max Power: DVR / Mobile                                        | 10W / 120W                  | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       | 10W / 120W                  | 10W / 120W                       | 10W / 120W                       |                             |
| APX7500 VHF 50W - UHF<br>R2 45W<br>FCC ID: AZ492FT7047         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6015A,<br>1/2 wave, 2dBd      | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      |                             |
| Max Power: DVR / Mobile                                        | 10W / 60W                   | 10W / 60W                   | 10W / 60W                        | 10W / 54W                        | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        |                             |
| APX6500 UHF R1 40W -<br>UHF R2 45W<br>FCC ID: AZ492FT4904      | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd |
| Max Power: DVR / Mobile                                        | 10W / 48W                   | 10W / 48W                   | 10W / 48W                        | 10W / 48W                        | 10W / 54W                   | 10W / 54W                        | 10W / 54W                        | 10W / 54W                   |

**Table 5E Approved UHF R3 DVRS Configurations – APX6500 / APX7500**

DVR: 7V083X01  
(DQPM DVR3000P)  
FCC ID: LO6-DVRSVHF

Freq Range: 136-174MHz, Trunk Mounted Antenna: HAD4006A, 1/4 wave, 0dBd, HAD4007A,

1/4 wave, 0dBd, HAD4008A, 1/4 wave, 0dBd, HAD4009A, 1/4 wave, 0dBd

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                                         | Antenna                     | Antenna                     | Antenna                          | Antenna                          | Antenna                     | Antenna                          | Antenna                          | Antenna                     |
|----------------------------------------------------------------|-----------------------------|-----------------------------|----------------------------------|----------------------------------|-----------------------------|----------------------------------|----------------------------------|-----------------------------|
| APX6500/ APX7500 VHF<br>(136-174MHz)<br>FCC ID: AZ492FT3824    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 6W / 60W                    | 6W / 60W                    | 6W / 60W                         |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500<br>700/800MHz<br>FCC ID: AZ492FT5858          | HAF4013A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd | HAF4017A,<br>1/4 wave, 3dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 6W / 42W                    | 6W / 42W                    | 6W / 42W                         |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500 VHF<br>(136-174MHz)<br>FCC ID: AZ492FT3821    | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 6W / 120W                   | 6W / 120W                   | 6W / 120W                        |                                  |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R1<br>(380-470MHz)<br>FCC ID: AZ492FT4894 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 6W / 48W                    | 6W / 48W                    | 6W / 48W                         | 6W / 48W                         |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R1<br>(380-470MHz)<br>FCC ID: AZ492FT4897 | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 6W / 120W                   | 6W / 120W                   | 6W / 120W                        | 6W / 120W                        |                             |                                  |                                  |                             |
| APX6500/ APX7500 UHF R2<br>(450-520MHz)<br>FCC ID: AZ492FT4896 | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      |                             |                                  |                                  |                             |
| Max Power: DVR / Mobile                                        | 6W / 54W                    | 6W / 54W                    | 6W / 54W                         | 6W / 54W                         |                             |                                  |                                  |                             |
| APX7500 7/800 MHz 35W -<br>VHF 50W<br>FCC ID: AZ492FT7037      | HAF4013A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd | HAF4017A,<br>1/4 wave, 3dBd      | HAD4008A,<br>1/4 wave, 0dBd      | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      |                                  |                             |
| Max Power: DVR / Mobile                                        | 6W / 42W                    | 6W / 42W                    | 6W / 42W                         | 6W / 60W                         | 6W / 60W                    | 6W / 60W                         |                                  |                             |
| APX7500 VHF 100W - 7/800<br>MHz 35W<br>FCC ID: AZ492FT7035     | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAF4013A,<br>1/4 wave, 3dBd      | HAF4016A,<br>1/4 wave, 0dBd | HAF4017A,<br>1/4 wave, 3dBd      |                                  |                             |
| Max Power: DVR / Mobile                                        | 6W / 120W                   | 6W / 120W                   | 6W / 120W                        | 6W / 42W                         | 6W / 42W                    | 6W / 42W                         |                                  |                             |
| APX7500 UHF R1 40W -<br>7/800 MHz 35W<br>FCC ID: AZ492FT7043   | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |
| Max Power: DVR / Mobile                                        | 6W / 48W                    | 6W / 48W                    | 6W / 48W                         | 6W / 48W                         | 6W / 42W                    | 6W / 42W                         | 6W / 42W                         |                             |
| APX7500 UHF R1 100W -<br>7/800 MHz 35W<br>FCC ID: AZ492FT7048  | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAF4013A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |
| Max Power: DVR / Mobile                                        | 6W / 120W                   | 6W / 120W                   | 6W / 120W                        | 6W / 120W                        | 6W / 42W                    | 6W / 42W                         | 6W / 42W                         |                             |
| APX7500 UHF R2 45W<br>7/800 MHz 35W<br>FCC ID: AZ492FT7044     | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      | HAF4013A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd      | HAF4017A,<br>1/4 wave, 3dBd      |                             |
| Max Power: DVR / Mobile                                        | 6W / 54W                    | 6W / 54W                    | 6W / 54W                         | 6W / 54W                         | 6W / 42W                    | 6W / 42W                         | 6W / 42W                         |                             |
| APX7500 VHF 50W - UHF<br>R1 40W<br>FCC ID: AZ492FT4895         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6012A,<br>1/4 wave, 0dBd      | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |
| Max Power: DVR / Mobile                                        | 6W / 60W                    | 6W / 60W                    | 6W / 60W                         | 6W / 48W                         | 6W / 48W                    | 6W / 48W                         | 6W / 48W                         |                             |
| APX7500 VHF 100W - UHF<br>R1 100W<br>FCC ID: AZ492FT4898       | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6012A,<br>1/4 wave, 0dBd      | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd |                             |
| Max Power: DVR / Mobile                                        | 6W / 120W                   | 6W / 120W                   | 6W / 120W                        | 6W / 120W                        | 6W / 120W                   | 6W / 120W                        | 6W / 120W                        |                             |
| APX7500 VHF 50W - UHF<br>R2 45W<br>FCC ID: AZ492FT7047         | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd      | HAE6015A,<br>1/2 wave, 2dBd      | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd      |                             |
| Max Power: DVR / Mobile                                        | 6W / 60W                    | 6W / 60W                    | 6W / 60W                         | 6W / 54W                         | 6W / 54W                    | 6W / 54W                         | 6W / 54W                         |                             |
| APX6500 UHF R1 40W -<br>UHF R2 45W<br>FCC ID: AZ492FT4904      | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd      | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE4004A,<br>1/4 wave, 0dBd |
| Max Power: DVR / Mobile                                        | 6W / 48W                    | 6W / 48W                    | 6W / 48W                         | 6W / 48W                         | 6W / 54W                    | 6W / 54W                         | 6W / 54W                         | 6W / 54W                    |

**Table 5F Approved VHF DVRS Configurations – APX6500 / APX7500**

DVR: 7V083X06  
(DQPM DVR8000P)  
FCC ID: LO6-DVRS800

Freq Range: 806-825, 851-870MHz, Trunk Mounted Antenna: HAF4016A, 1/4 wave, 0dBd

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                          | Antenna                            | Antenna                          | Antenna                        | Antenna                        | Antenna                          | Antenna                        | Antenna                        | Antenna                          | Antenna                        | Antenna                          | Antenna                          | Antenna                          | Antenna                           | Antenna   |
|-------------------------------------------------|------------------------------------|----------------------------------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|----------------------------------|----------------------------------|-----------------------------------|-----------|
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7089 | AN000131A01<br>, 1/4 wave,<br>0dBd | HAD4006A,<br>1/4 wave,<br>0dBd   | HAD4007A,<br>1/4 wave,<br>0dBd | HAD4008A,<br>1/4 wave,<br>0dBd | HAD4009A,<br>1/4 wave,<br>0dBd   | HAD4016A,<br>1/4 wave,<br>0dBd | HAD4017A,<br>1/4 wave,<br>0dBd | HAD4021A,<br>1/4 wave,<br>0dBd   | HAD4022A,<br>5/8 wave,<br>3dBd | RAD4010ARB,<br>1/2 wave,<br>3dBd |                                  |                                  |                                   |           |
| Max Power: DVR / Mobile                         | 10W / 60W                          | 10W / 60W                        | 10W / 60W                      | 10W / 60W                      | 10W / 60W                        | 10W / 60W                      | 10W / 60W                      | 10W / 60W                        | 10W / 60W                      | 10W / 60W                        |                                  |                                  |                                   |           |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7089 | AN000131A01<br>, 1/4 wave,<br>0dBd | HAE6010A,<br>1/2 wave,<br>3.5dBd | HAE6011A,<br>5/8 wave,<br>5dBd | HAE6012A,<br>1/4 wave,<br>0dBd | HAE6013A,<br>1/2 wave,<br>2dBd   | HAE6031A,<br>1/2 wave,<br>2dBd | HAE4003A,<br>1/4 wave,<br>0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave,<br>2dBd | HAE6016A,<br>1/4 wave,<br>0dBd   | RAE4014ARB,<br>5/8 wave,<br>5dBd |                                  |                                   |           |
| Max Power: DVR / Mobile                         | 10W / 54W                          | 10W / 54W                        | 10W / 54W                      | 10W / 54W                      | 10W / 54W                        | 10W / 54W                      | 10W / 54W                      | 10W / 54W                        | 10W / 54W                      | 10W / 54W                        | 10W / 54W                        |                                  |                                   |           |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7089 | AN000131A01<br>, 1/4 wave,<br>0dBd | HAE6013A,<br>1/2 wave,<br>2dBd   | HAE6031A,<br>1/2 wave,<br>2dBd | HAE4003A,<br>1/4 wave,<br>0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave,<br>2dBd | HAE6016A,<br>1/4 wave,<br>0dBd | RAE4014ARB,<br>5/8 wave,<br>5dBd | HAE4004A,<br>1/4 wave,<br>0dBd | HAE4012A,<br>1/2 wave,<br>3.5dBd | HAE4013A,<br>1/2 wave,<br>3.5dBd | RAE4015ARM,<br>5/8 wave,<br>5dBd | RAE40416ARB,<br>5/8 wave,<br>5dBd |           |
| Max Power: DVR / Mobile                         | 10W / 54W                          | 10W / 54W                        | 10W / 54W                      | 10W / 54W                      | 10W / 54W                        | 10W / 54W                      | 10W / 54W                      | 10W / 54W                        | 10W / 54W                      | 10W / 54W                        | 10W / 54W                        | 10W / 54W                        | 10W / 54W                         | 10W / 54W |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7089         | AN000131A01<br>, 1/4 wave,<br>0dBd | HAF4013A,<br>1/4 wave,<br>3dBd   | HAF4014A,<br>1/4 wave,<br>3dBd | HAF4016A,<br>1/4 wave,<br>0dBd | HAF4017A,<br>1/4 wave,<br>3dBd   |                                |                                |                                  |                                |                                  |                                  |                                  |                                   |           |
| Max Power: DVR / Mobile                         | 10W / 42W                          | 10W / 42W                        | 10W / 42W                      | 10W / 42W                      | 10W / 42W                        |                                |                                |                                  |                                |                                  |                                  |                                  |                                   |           |

**Table 6A Approved 800 DVRS Configurations – APX8500**

DVR: 7V083X05  
(DQPM DVR7000P)  
FCC ID: LO6-DVRS700

Freq Range: 764-776, 794-806MHz, Trunk Mounted Antenna: HAF4016A, 1/4 wave, 0dBd

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                          | Antenna                        | Antenna                        | Antenna                        | Antenna                        | Antenna                        | Antenna                        | Antenna                        | Antenna                          | Antenna                        | Antenna                          | Antenna                          | Antenna                          | Antenna                           | Antenna  |
|-------------------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|----------------------------------|----------------------------------|-----------------------------------|----------|
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7089 | AN000131A01,<br>1/4 wave, 0dBd | HAD4006A,<br>1/4 wave,<br>0dBd | HAD4007A,<br>1/4 wave,<br>0dBd | HAD4008A,<br>1/4 wave,<br>0dBd | HAD4009A,<br>1/4 wave,<br>0dBd | HAD4016A,<br>1/4 wave,<br>0dBd | HAD4017A,<br>1/4 wave,<br>0dBd | HAD4021A,<br>1/4 wave,<br>0dBd   | HAD4022A,<br>5/8 wave,<br>3dBd | RAD4010ARB,<br>1/2 wave,<br>3dBd |                                  |                                  |                                   |          |
| Max Power: DVR / Mobile                         | 5W / 60W                       | 5W / 60W                       | 5W / 60W                       | 5W / 60W                       | 5W / 60W                       | 5W / 60W                       | 5W / 60W                       | 5W / 60W                         | 5W / 60W                       | 5W / 60W                         |                                  |                                  |                                   |          |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7089 | AN000131A01,<br>1/4 wave, 0dBd | HAE6010A, 1/2<br>wave, 3.5dBd  | HAE6011A, 5/8<br>wave, 5dBd    | HAE6012A, 1/4<br>wave, 0dBd    | HAE6013A, 1/2<br>wave, 2dBd    | HAE6031A, 1/2<br>wave, 2dBd    | HAE4003A, 1/4<br>wave, 0dBd    | HAE4011A, 1/2<br>wave, 3.5dBd    | HAE6015A, 1/2<br>wave, 2dBd    | HAE6016A, 1/4<br>wave, 0dBd      | RAE4014ARB,<br>5/8 wave,<br>5dBd |                                  |                                   |          |
| Max Power: DVR / Mobile                         | 5W / 54W                       | 5W / 54W                       | 5W / 54W                       | 5W / 54W                       | 5W / 54W                       | 5W / 54W                       | 5W / 54W                       | 5W / 54W                         | 5W / 54W                       | 5W / 54W                         | 5W / 54W                         |                                  |                                   |          |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7089 | AN000131A01,<br>1/4 wave, 0dBd | HAE6013A, 1/2<br>wave, 2dBd    | HAE6031A, 1/2<br>wave, 2dBd    | HAE4003A, 1/4<br>wave, 0dBd    | HAE4011A, 1/2<br>wave, 3.5dBd  | HAE6015A, 1/2<br>wave, 2dBd    | HAE6016A, 1/4<br>wave, 0dBd    | RAE4014ARB,<br>5/8 wave,<br>5dBd | HAE4004A, 1/4<br>wave, 0dBd    | HAE4012A, 1/2<br>wave, 3.5dBd    | HAE4013A, 1/2<br>wave, 3.5dBd    | RAE4015ARM,<br>5/8 wave,<br>5dBd | RAE40416ARB,<br>5/8 wave,<br>5dBd |          |
| Max Power: DVR / Mobile                         | 5W / 54W                       | 5W / 54W                       | 5W / 54W                       | 5W / 54W                       | 5W / 54W                       | 5W / 54W                       | 5W / 54W                       | 5W / 54W                         | 5W / 54W                       | 5W / 54W                         | 5W / 54W                         | 5W / 54W                         | 5W / 54W                          | 5W / 54W |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7089         | AN000131A01,<br>1/4 wave, 0dBd | HAF4013A, 1/4<br>wave, 3dBd    | HAF4014A, 1/4<br>wave, 3dBd    | HAF4016A, 1/4<br>wave, 0dBd    | HAF4017A, 1/4<br>wave, 3dBd    |                                |                                |                                  |                                |                                  |                                  |                                  |                                   |          |
| Max Power: DVR / Mobile                         | 5W / 42W                       | 5W / 42W                       | 5W / 42W                       | 5W / 42W                       | 5W / 42W                       |                                |                                |                                  |                                |                                  |                                  |                                  |                                   |          |

**Table 6B Approved 700 DVRS Configurations – APX8500**

DVR: 7V083X07  
(DQPM DVR4000P)

Freq Range: 380-430MHz, Trunk Mounted Antenna: HAE6012A, 1/4 wave, 0dBd

FCC ID: LO6-DVRSUHF

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                          | Roof Mounted Antenna        | Roof Mounted Antenna       | Roof Mounted Antenna     | Roof Mounted Antenna     | Roof Mounted Antenna       | Roof Mounted Antenna     | Roof Mounted Antenna     | Roof Mounted Antenna       | Roof Mounted Antenna     | Roof Mounted Antenna       | Roof Mounted Antenna       | Roof Mounted Antenna        |
|-------------------------------------------------|-----------------------------|----------------------------|--------------------------|--------------------------|----------------------------|--------------------------|--------------------------|----------------------------|--------------------------|----------------------------|----------------------------|-----------------------------|
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7089 | AN000131A01, 1/4 wave, 0dBd | HAD4006A, 1/4 wave, 0dBd   | HAD4007A, 1/4 wave, 0dBd | HAD4008A, 1/4 wave, 0dBd | HAD4009A, 1/4 wave, 0dBd   | HAD4016A, 1/4 wave, 0dBd | HAD4017A, 1/4 wave, 0dBd | HAD4021A, 1/4 wave, 0dBd   | HAD4022A, 5/8 wave, 3dBd | RAD4010ARB, 1/2 wave, 3dBd |                            |                             |
| Max Power: DVR / Mobile                         | 5W / 60W                    | 5W / 60W                   | 5W / 60W                 | 5W / 60W                 | 5W / 60W                   | 5W / 60W                 | 5W / 60W                 | 5W / 60W                   | 5W / 60W                 | 5W / 60W                   |                            |                             |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7089 | AN000131A01, 1/4 wave, 0dBd | HAE6010A, 1/2 wave, 3.5dBd | HAE6011A, 5/8 wave, 5dBd | HAE6012A, 1/4 wave, 0dBd | HAE6013A, 1/2 wave, 2dBd   | HAE6031A, 1/2 wave, 2dBd | HAE4003A, 1/4 wave, 0dBd | HAE4011A, 1/2 wave, 3.5dBd | HAE6015A, 1/2 wave, 2dBd | HAE6016A, 1/4 wave, 0dBd   | RAE4014ARB, 5/8 wave, 5dBd |                             |
| Max Power: DVR / Mobile                         | 5W / 54W                    | 5W / 54W                   | 5W / 54W                 | 5W / 54W                 | 5W / 54W                   | 5W / 54W                 | 5W / 54W                 | 5W / 54W                   | 5W / 54W                 | 5W / 54W                   | 5W / 54W                   |                             |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7089 | AN000131A01, 1/4 wave, 0dBd | HAE6013A, 1/2 wave, 2dBd   | HAE6031A, 1/2 wave, 2dBd | HAE4003A, 1/4 wave, 0dBd | HAE4011A, 1/2 wave, 3.5dBd | HAE6015A, 1/2 wave, 2dBd | HAE6016A, 1/4 wave, 0dBd | RAE4014ARB, 5/8 wave, 5dBd | HAE4004A, 1/4 wave, 0dBd | HAE4012A, 1/2 wave, 3.5dBd | HAE4013A, 1/2 wave, 3.5dBd | RAE40416ARB, 5/8 wave, 5dBd |
| Max Power: DVR / Mobile                         | 5W / 54W                    | 5W / 54W                   | 5W / 54W                 | 5W / 54W                 | 5W / 54W                   | 5W / 54W                 | 5W / 54W                 | 5W / 54W                   | 5W / 54W                 | 5W / 54W                   | 5W / 54W                   | 5W / 54W                    |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7089         | AN000131A01, 1/4 wave, 0dBd | HAF4013A, 1/4 wave, 3dBd   | HAF4014A, 1/4 wave, 3dBd | HAF4016A, 1/4 wave, 0dBd | HAF4017A, 1/4 wave, 3dBd   |                          |                          |                            |                          |                            |                            |                             |
| Max Power: DVR / Mobile                         | 5W / 42W                    | 5W / 42W                   | 5W / 42W                 | 5W / 42W                 | 5W / 42W                   |                          |                          |                            |                          |                            |                            |                             |

**Table 6C Approved UHF R1 DVRS Configurations – APX8500**

DVR: 7V083X03  
(DQPM D VR5000P)

Freq Range: 450-470MHz, Trunk Mounted Antenna: HAE4003A, 1/4 wave, 0dBd; HAE6016A, 1/4 wave, 0 dBd  
(HAE6016A offered only with DVR/ XTL combination)

FCC ID: LO6-DVRSUHF

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                          | Roof Mounted Antenna        | Roof Mounted Antenna       | Roof Mounted Antenna     | Roof Mounted Antenna     | Roof Mounted Antenna       | Roof Mounted Antenna     | Roof Mounted Antenna     | Roof Mounted Antenna       | Roof Mounted Antenna     | Roof Mounted Antenna       | Roof Mounted Antenna       | Roof Mounted Antenna        |
|-------------------------------------------------|-----------------------------|----------------------------|--------------------------|--------------------------|----------------------------|--------------------------|--------------------------|----------------------------|--------------------------|----------------------------|----------------------------|-----------------------------|
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7089 | AN000131A01, 1/4 wave, 0dBd | HAD4006A, 1/4 wave, 0dBd   | HAD4007A, 1/4 wave, 0dBd | HAD4008A, 1/4 wave, 0dBd | HAD4009A, 1/4 wave, 0dBd   | HAD4016A, 1/4 wave, 0dBd | HAD4017A, 1/4 wave, 0dBd | HAD4021A, 1/4 wave, 0dBd   | HAD4022A, 5/8 wave, 3dBd | RAD4010ARB, 1/2 wave, 3dBd |                            |                             |
| Max Power: DVR / Mobile                         | 5W / 60W                    | 5W / 60W                   | 5W / 60W                 | 5W / 60W                 | 5W / 60W                   | 5W / 60W                 | 5W / 60W                 | 5W / 60W                   | 5W / 60W                 | 5W / 60W                   |                            |                             |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7089 | AN000131A01, 1/4 wave, 0dBd | HAE6010A, 1/2 wave, 3.5dBd | HAE6011A, 5/8 wave, 5dBd | HAE6012A, 1/4 wave, 0dBd | HAE6013A, 1/2 wave, 2dBd   | HAE6031A, 1/2 wave, 2dBd | HAE4003A, 1/4 wave, 0dBd | HAE4011A, 1/2 wave, 3.5dBd | HAE6015A, 1/2 wave, 2dBd | HAE6016A, 1/4 wave, 0dBd   | RAE4014ARB, 5/8 wave, 5dBd |                             |
| Max Power: DVR / Mobile                         | 5W / 54W                    | 5W / 54W                   | 5W / 54W                 | 5W / 54W                 | 5W / 54W                   | 5W / 54W                 | 5W / 54W                 | 5W / 54W                   | 5W / 54W                 | 5W / 54W                   | 5W / 54W                   |                             |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7089 | AN000131A01, 1/4 wave, 0dBd | HAE6013A, 1/2 wave, 2dBd   | HAE6031A, 1/2 wave, 2dBd | HAE4003A, 1/4 wave, 0dBd | HAE4011A, 1/2 wave, 3.5dBd | HAE6015A, 1/2 wave, 2dBd | HAE6016A, 1/4 wave, 0dBd | RAE4014ARB, 5/8 wave, 5dBd | HAE4004A, 1/4 wave, 0dBd | HAE4012A, 1/2 wave, 3.5dBd | HAE4013A, 1/2 wave, 3.5dBd | RAE40416ARB, 5/8 wave, 5dBd |
| Max Power: DVR / Mobile                         | 5W / 54W                    | 5W / 54W                   | 5W / 54W                 | 5W / 54W                 | 5W / 54W                   | 5W / 54W                 | 5W / 54W                 | 5W / 54W                   | 5W / 54W                 | 5W / 54W                   | 5W / 54W                   | 5W / 54W                    |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7089         | AN000131A01, 1/4 wave, 0dBd | HAF4013A, 1/4 wave, 3dBd   | HAF4014A, 1/4 wave, 3dBd | HAF4016A, 1/4 wave, 0dBd | HAF4017A, 1/4 wave, 3dBd   |                          |                          |                            |                          |                            |                            |                             |
| Max Power: DVR / Mobile                         | 5W / 42W                    | 5W / 42W                   | 5W / 42W                 | 5W / 42W                 | 5W / 42W                   |                          |                          |                            |                          |                            |                            |                             |

**Table 6D Approved UHF R2 DVRS Configurations – APX8500**

DVR: 7V083X04  
(DQPM DVR6000P)  
FCC ID: LO6-DVRSUHF

Freq Range: 470-512MHz, Trunk Mounted Antenna: HAE4004A, 1/4 wave, 0dBd; HAE6016A, 1/4 wave,  
0 dBd (HAE6016A offered only with DVR/ XTL combination)

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                          | Roof Mounted Antenna           | Roof Mounted Antenna          | Roof Mounted Antenna        | Roof Mounted Antenna        | Roof Mounted Antenna          | Roof Mounted Antenna        | Roof Mounted Antenna        | Roof Mounted Antenna          | Roof Mounted Antenna        | Roof Mounted Antenna          | Roof Mounted Antenna          | Roof Mounted Antenna           |
|-------------------------------------------------|--------------------------------|-------------------------------|-----------------------------|-----------------------------|-------------------------------|-----------------------------|-----------------------------|-------------------------------|-----------------------------|-------------------------------|-------------------------------|--------------------------------|
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7089 | AN000131A01,<br>1/4 wave, 0dBd | HAD4006A, 1/4<br>wave, 0dBd   | HAD4007A, 1/4<br>wave, 0dBd | HAD4008A, 1/4<br>wave, 0dBd | HAD4009A, 1/4<br>wave, 0dBd   | HAD4016A, 1/4<br>wave, 0dBd | HAD4017A, 1/4<br>wave, 0dBd | HAD4021A, 1/4<br>wave, 0dBd   | HAD4022A, 5/8<br>wave, 3dBd | RAD4010ARB, 1/2<br>wave, 3dBd |                               |                                |
| Max Power: DVR / Mobile                         | 5W / 60W                       | 5W / 60W                      | 5W / 60W                    | 5W / 60W                    | 5W / 60W                      | 5W / 60W                    | 5W / 60W                    | 5W / 60W                      | 5W / 60W                    | 5W / 60W                      |                               |                                |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7089 | AN000131A01,<br>1/4 wave, 0dBd | HAE6010A, 1/2<br>wave, 3.5dBd | HAE6011A, 5/8<br>wave, 5dBd | HAE6012A, 1/4<br>wave, 0dBd | HAE6013A, 1/2<br>wave, 2dBd   | HAE6031A, 1/2<br>wave, 2dBd | HAE4003A, 1/4<br>wave, 0dBd | HAE4011A, 1/2<br>wave, 3.5dBd | HAE6015A, 1/2<br>wave, 2dBd | HAE6016A, 1/4<br>wave, 0dBd   | RAE4014ARB, 5/8<br>wave, 5dBd |                                |
| Max Power: DVR / Mobile                         | 5W / 54W                       | 5W / 54W                      | 5W / 54W                    | 5W / 54W                    | 5W / 54W                      | 5W / 54W                    | 5W / 54W                    | 5W / 54W                      | 5W / 54W                    | 5W / 54W                      | 5W / 54W                      |                                |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7089 | AN000131A01,<br>1/4 wave, 0dBd | HAE6013A, 1/2<br>wave, 2dBd   | HAE6031A, 1/2<br>wave, 2dBd | HAE4003A, 1/4<br>wave, 0dBd | HAE4011A, 1/2<br>wave, 3.5dBd | HAE6015A, 1/2<br>wave, 2dBd | HAE6016A, 1/4<br>wave, 0dBd | RAE4014ARB,<br>5/8 wave, 5dBd | HAE4004A, 1/4<br>wave, 0dBd | HAE4012A, 1/2<br>wave, 3.5dBd | HAE4013A, 1/2<br>wave, 3.5dBd | RAE40416ARB, 5/8<br>wave, 5dBd |
| Max Power: DVR / Mobile                         | 5W / 54W                       | 5W / 54W                      | 5W / 54W                    | 5W / 54W                    | 5W / 54W                      | 5W / 54W                    | 5W / 54W                    | 5W / 54W                      | 5W / 54W                    | 5W / 54W                      | 5W / 54W                      | 5W / 54W                       |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7089         | AN000131A01,<br>1/4 wave, 0dBd | HAF4013A, 1/4<br>wave, 3dBd   | HAF4014A, 1/4<br>wave, 3dBd | HAF4016A, 1/4<br>wave, 0dBd | HAF4017A, 1/4<br>wave, 3dBd   |                             |                             |                               |                             |                               |                               |                                |
| Max Power: DVR / Mobile                         | 5W / 42W                       | 5W / 42W                      | 5W / 42W                    | 5W / 42W                    | 5W / 42W                      |                             |                             |                               |                             |                               |                               |                                |

Table 6E Approved UHF R3 DVRS Configurations – APX8500

DVR: 7V083X01  
(DQPM DVR3000P)  
FCC ID: LO6-DVRSVHF

Freq Range: 136-174MHz, Trunk Mounted Antenna: HAD4006A, 1/4 wave, 0dBd, HAD4007A, 1/4 wave, 0dBd,  
HAD4008A, 1/4 wave, 0dBd, HAD4009A, 1/4 wave, 0dBd

Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)

| Mobile                                          | Roof Mounted Antenna           | Roof Mounted Antenna          | Roof Mounted Antenna        | Roof Mounted Antenna        | Roof Mounted Antenna          | Roof Mounted Antenna        | Roof Mounted Antenna        | Roof Mounted Antenna          | Roof Mounted Antenna        | Roof Mounted Antenna          | Roof Mounted Antenna          | Roof Mounted Antenna           |
|-------------------------------------------------|--------------------------------|-------------------------------|-----------------------------|-----------------------------|-------------------------------|-----------------------------|-----------------------------|-------------------------------|-----------------------------|-------------------------------|-------------------------------|--------------------------------|
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7089 | AN000131A01,<br>1/4 wave, 0dBd | HAD4006A, 1/4<br>wave, 0dBd   | HAD4007A, 1/4<br>wave, 0dBd | HAD4008A, 1/4<br>wave, 0dBd | HAD4009A, 1/4<br>wave, 0dBd   | HAD4016A, 1/4<br>wave, 0dBd | HAD4017A, 1/4<br>wave, 0dBd | HAD4021A, 1/4<br>wave, 0dBd   | HAD4022A, 5/8<br>wave, 3dBd | RAD4010ARB,<br>1/2 wave, 3dBd |                               |                                |
| Max Power: DVR / Mobile                         | 5W / 60W                       | 5W / 60W                      | 5W / 60W                    | 5W / 60W                    | 5W / 60W                      | 5W / 60W                    | 5W / 60W                    | 5W / 60W                      | 5W / 60W                    | 5W / 60W                      |                               |                                |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7089 | AN000131A01,<br>1/4 wave, 0dBd | HAE6010A, 1/2<br>wave, 3.5dBd | HAE6011A, 5/8<br>wave, 5dBd | HAE6012A, 1/4<br>wave, 0dBd | HAE6013A, 1/2<br>wave, 2dBd   | HAE6031A, 1/2<br>wave, 2dBd | HAE4003A, 1/4<br>wave, 0dBd | HAE4011A, 1/2<br>wave, 3.5dBd | HAE6015A, 1/2<br>wave, 2dBd | HAE6016A, 1/4<br>wave, 0dBd   | RAE4014ARB,<br>5/8 wave, 5dBd |                                |
| Max Power: DVR / Mobile                         | 5W / 54W                       | 5W / 54W                      | 5W / 54W                    | 5W / 54W                    | 5W / 54W                      | 5W / 54W                    | 5W / 54W                    | 5W / 54W                      | 5W / 54W                    | 5W / 54W                      | 5W / 54W                      |                                |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7089 | AN000131A01,<br>1/4 wave, 0dBd | HAE6013A, 1/2<br>wave, 2dBd   | HAE6031A, 1/2<br>wave, 2dBd | HAE4003A, 1/4<br>wave, 0dBd | HAE4011A, 1/2<br>wave, 3.5dBd | HAE6015A, 1/2<br>wave, 2dBd | HAE6016A, 1/4<br>wave, 0dBd | RAE4014ARB,<br>5/8 wave, 5dBd | HAE4004A, 1/4<br>wave, 0dBd | HAE4012A, 1/2<br>wave, 3.5dBd | HAE4013A, 1/2<br>wave, 3.5dBd | RAE40416ARB, 5/8<br>wave, 5dBd |
| Max Power: DVR / Mobile                         | 5W / 54W                       | 5W / 54W                      | 5W / 54W                    | 5W / 54W                    | 5W / 54W                      | 5W / 54W                    | 5W / 54W                    | 5W / 54W                      | 5W / 54W                    | 5W / 54W                      | 5W / 54W                      | 5W / 54W                       |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7089         | AN000131A01,<br>1/4 wave, 0dBd | HAF4013A, 1/4<br>wave, 3dBd   | HAF4014A, 1/4<br>wave, 3dBd | HAF4016A, 1/4<br>wave, 0dBd | HAF4017A, 1/4<br>wave, 3dBd   |                             |                             |                               |                             |                               |                               |                                |
| Max Power: DVR / Mobile                         | 5W / 42W                       | 5W / 42W                      | 5W / 42W                    | 5W / 42W                    | 5W / 42W                      |                             |                             |                               |                             |                               |                               |                                |

Table 6F Approved VHF DVRS Configurations – APX8500

|                                                 |                                                                                                |                                  |                                |                                |                                  |                                |                                |                                  |                                |                                  |                                  |                               |                                |
|-------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|----------------------------------|-------------------------------|--------------------------------|
| <b>DVR:</b> 7V083X06<br>(DQPM DVR8000P)         | <b>Freq Range:</b> 806-825, 851-870MHz, <b>Trunk Mounted Antenna:</b> HAF4016A, 1/4 wave, 0dBd |                                  |                                |                                |                                  |                                |                                |                                  |                                |                                  |                                  |                               |                                |
| <b>FCC ID:</b> LO6-DVRS800                      | <b>Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)</b>                      |                                  |                                |                                |                                  |                                |                                |                                  |                                |                                  |                                  |                               |                                |
|                                                 | <b>Roof Mounted Antenna</b>                                                                    | <b>Roof Mounted Antenna</b>      | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>      | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>      | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>      | <b>Roof Mounted Antenna</b>      | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>    |
| <b>Mobile</b>                                   | <b>Antenna</b>                                                                                 | <b>Antenna</b>                   | <b>Antenna</b>                 | <b>Antenna</b>                 | <b>Antenna</b>                   | <b>Antenna</b>                 | <b>Antenna</b>                 | <b>Antenna</b>                   | <b>Antenna</b>                 | <b>Antenna</b>                   | <b>Antenna</b>                   | <b>Antenna</b>                | <b>Antenna</b>                 |
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave,<br>0dBd                                                             | HAD4006A,<br>1/4 wave,<br>0dBd   | HAD4007A,<br>1/4 wave,<br>0dBd | HAD4008A,<br>1/4 wave,<br>0dBd | HAD4009A,<br>1/4 wave,<br>0dBd   | HAD4016A,<br>1/4 wave,<br>0dBd | HAD4017A,<br>1/4 wave,<br>0dBd | HAD4021A,<br>1/4 wave,<br>0dBd   | HAD4022A,<br>5/8 wave,<br>3dBd | RAD4010ARB,<br>1/2 wave,<br>3dBd |                                  |                               |                                |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                                     | 10W / 120W                       | 10W / 120W                     | 10W / 120W                     | 10W / 120W                       | 10W / 120W                     | 10W / 120W                     | 10W / 120W                       | 10W / 120W                     | 10W / 120W                       |                                  |                               |                                |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave,<br>0dBd                                                             | HAE6010A,<br>1/2 wave,<br>3.5dBd | HAE6011A,<br>5/8 wave,<br>5dBd | HAE6012A,<br>1/4 wave,<br>0dBd | HAE6013A,<br>1/2 wave,<br>2dBd   | HAE6031A,<br>1/2 wave,<br>2dBd | HAE4003A,<br>1/4 wave,<br>0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave,<br>2dBd | HAE6016A,<br>1/4 wave,<br>0dBd   | RAE4014ARB,<br>5/8 wave,<br>5dBd |                               |                                |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                                     | 10W / 120W                       | 10W / 120W                     | 10W / 120W                     | 10W / 120W                       | 10W / 120W                     | 10W / 120W                     | 10W / 120W                       | 10W / 120W                     | 10W / 120W                       | 10W / 120W                       |                               |                                |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave,<br>0dBd                                                             | HAE6013A,<br>1/2 wave,<br>2dBd   | HAE6031A,<br>1/2 wave,<br>2dBd | HAE4003A,<br>1/4 wave,<br>0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave,<br>2dBd | HAE6016A,<br>1/4 wave,<br>0dBd | RAE4014ARB,<br>5/8 wave,<br>5dBd | HAE4004A,<br>1/4 wave,<br>0dBd | HAE4012A,<br>1/2 wave,<br>3.5dBd | HAE4013A,<br>1/2 wave,<br>3.5dBd | RAE4015ARM,<br>5/8 wave, 5dBd | RAE40416ARB,<br>5/8 wave, 5dBd |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                                     | 10W / 120W                       | 10W / 120W                     | 10W / 120W                     | 10W / 120W                       | 10W / 120W                     | 10W / 120W                     | 10W / 120W                       | 10W / 120W                     | 10W / 120W                       | 10W / 120W                       | 10W / 120W                    | 10W / 120W                     |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7118         | AN000131A01<br>, 1/4 wave,<br>0dBd                                                             | HAF4013A,<br>1/4 wave,<br>3dBd   | HAF4014A,<br>1/4 wave,<br>3dBd | HAF4016A,<br>1/4 wave,<br>0dBd | HAF4017A,<br>1/4 wave,<br>3dBd   |                                |                                |                                  |                                |                                  |                                  |                               |                                |
| Max Power: DVR / Mobile                         | 10W / 42W                                                                                      | 10W / 42W                        | 10W / 42W                      | 10W / 42W                      | 10W / 42W                        |                                |                                |                                  |                                |                                  |                                  |                               |                                |

Table 7A Approved 800 DVRS Configurations- APX8500 HP

|                                                 |                                                                                                |                                  |                                |                                |                                  |                                |                                |                                  |                                |                                  |                                  |                               |                                |
|-------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|----------------------------------|-------------------------------|--------------------------------|
| <b>DVR:</b> 7V083X05<br>(DQPM DVR7000P)         | <b>Freq Range:</b> 764-776, 794-806MHz, <b>Trunk Mounted Antenna:</b> HAF4016A, 1/4 wave, 0dBd |                                  |                                |                                |                                  |                                |                                |                                  |                                |                                  |                                  |                               |                                |
| <b>FCC ID:</b> LO6-DVRS700                      | <b>Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)</b>                      |                                  |                                |                                |                                  |                                |                                |                                  |                                |                                  |                                  |                               |                                |
|                                                 | <b>Roof Mounted Antenna</b>                                                                    | <b>Roof Mounted Antenna</b>      | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>      | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>      | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>      | <b>Roof Mounted Antenna</b>      | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>    |
| <b>Mobile</b>                                   | <b>Antenna</b>                                                                                 | <b>Antenna</b>                   | <b>Antenna</b>                 | <b>Antenna</b>                 | <b>Antenna</b>                   | <b>Antenna</b>                 | <b>Antenna</b>                 | <b>Antenna</b>                   | <b>Antenna</b>                 | <b>Antenna</b>                   | <b>Antenna</b>                   | <b>Antenna</b>                | <b>Antenna</b>                 |
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave,<br>0dBd                                                             | HAD4006A,<br>1/4 wave,<br>0dBd   | HAD4007A,<br>1/4 wave,<br>0dBd | HAD4008A,<br>1/4 wave,<br>0dBd | HAD4009A,<br>1/4 wave,<br>0dBd   | HAD4016A,<br>1/4 wave,<br>0dBd | HAD4017A,<br>1/4 wave,<br>0dBd | HAD4021A,<br>1/4 wave,<br>0dBd   | HAD4022A,<br>5/8 wave,<br>3dBd | RAD4010ARB,<br>1/2 wave,<br>3dBd |                                  |                               |                                |
| Max Power: DVR / Mobile                         | 5W / 120W                                                                                      | 5W / 120W                        | 5W / 120W                      | 5W / 120W                      | 5W / 120W                        | 5W / 120W                      | 5W / 120W                      | 5W / 120W                        | 5W / 120W                      | 5W / 120W                        |                                  |                               |                                |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave,<br>0dBd                                                             | HAE6010A,<br>1/2 wave,<br>3.5dBd | HAE6011A,<br>5/8 wave,<br>5dBd | HAE6012A,<br>1/4 wave,<br>0dBd | HAE6013A,<br>1/2 wave,<br>2dBd   | HAE6031A,<br>1/2 wave,<br>2dBd | HAE4003A,<br>1/4 wave,<br>0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave,<br>2dBd | HAE6016A,<br>1/4 wave,<br>0dBd   | RAE4014ARB,<br>5/8 wave,<br>5dBd |                               |                                |
| Max Power: DVR / Mobile                         | 5W / 120W                                                                                      | 5W / 120W                        | 5W / 120W                      | 5W / 120W                      | 5W / 120W                        | 5W / 120W                      | 5W / 120W                      | 5W / 120W                        | 5W / 120W                      | 5W / 120W                        | 5W / 120W                        |                               |                                |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave,<br>0dBd                                                             | HAE6013A,<br>1/2 wave,<br>2dBd   | HAE6031A,<br>1/2 wave,<br>2dBd | HAE4003A,<br>1/4 wave,<br>0dBd | HAE4011A,<br>1/2 wave,<br>3.5dBd | HAE6015A,<br>1/2 wave,<br>2dBd | HAE6016A,<br>1/4 wave,<br>0dBd | RAE4014ARB,<br>5/8 wave,<br>5dBd | HAE4004A,<br>1/4 wave,<br>0dBd | HAE4012A,<br>1/2 wave,<br>3.5dBd | HAE4013A,<br>1/2 wave,<br>3.5dBd | RAE4015ARM,<br>5/8 wave, 5dBd | RAE40416ARB,<br>5/8 wave, 5dBd |
| Max Power: DVR / Mobile                         | 5W / 120W                                                                                      | 5W / 120W                        | 5W / 120W                      | 5W / 120W                      | 5W / 120W                        | 5W / 120W                      | 5W / 120W                      | 5W / 120W                        | 5W / 120W                      | 5W / 120W                        | 5W / 120W                        | 5W / 120W                     | 5W / 120W                      |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7118         | AN000131A01<br>, 1/4 wave,<br>0dBd                                                             | HAF4013A,<br>1/4 wave,<br>3dBd   | HAF4014A,<br>1/4 wave,<br>3dBd | HAF4016A,<br>1/4 wave,<br>0dBd | HAF4017A,<br>1/4 wave,<br>3dBd   |                                |                                |                                  |                                |                                  |                                  |                               |                                |
| Max Power: DVR / Mobile                         | 5W / 42W                                                                                       | 5W / 42W                         | 5W / 42W                       | 5W / 42W                       | 5W / 42W                         |                                |                                |                                  |                                |                                  |                                  |                               |                                |

Table 7B Approved 700 DVRS Configurations- APX8500 HP

|                                                 |                                                                                       |                               |                             |                             |                               |                             |                             |                                |                             |                               |                                |                               |                                 |
|-------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------|-----------------------------|-----------------------------|-------------------------------|-----------------------------|-----------------------------|--------------------------------|-----------------------------|-------------------------------|--------------------------------|-------------------------------|---------------------------------|
| <b>DVR:</b> 7V083X07<br>(DQPM DVR4000P)         | <b>Freq Range:</b> 380-430MHz, <b>Trunk Mounted Antenna:</b> HAE6012A, 1/4 wave, 0dBd |                               |                             |                             |                               |                             |                             |                                |                             |                               |                                |                               |                                 |
| <b>FCC ID:</b> LO6-DVRSUHF                      | <b>Maximum conducted power delivered to antenna:</b> DVR (W) / Mobile (W)             |                               |                             |                             |                               |                             |                             |                                |                             |                               |                                |                               |                                 |
|                                                 |                                                                                       |                               |                             |                             |                               |                             |                             |                                |                             |                               |                                |                               |                                 |
|                                                 | <b>Roof Mounted Antenna</b>                                                           | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>     |
| <b>Mobile</b>                                   |                                                                                       |                               |                             |                             |                               |                             |                             |                                |                             |                               |                                |                               |                                 |
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAD4006A,<br>1/4 wave, 0dBd   | HAD4007A,<br>1/4 wave, 0dBd | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd   | HAD4016A,<br>1/4 wave, 0dBd | HAD4017A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd    | HAD4022A,<br>5/8 wave, 3dBd | RAD4010ARB,<br>1/2 wave, 3dBd |                                |                               |                                 |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                            | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                     | 10W / 120W                  | 10W / 120W                    |                                |                               |                                 |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAE6010A,<br>1/2 wave, 3.5dBd | HAE6011A,<br>5/8 wave, 5dBd | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd   | HAE6031A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd  | HAE6015A,<br>1/2 wave, 2dBd | HAE6016A,<br>1/4 wave, 0dBd   | RAE4014AR<br>B, 5/8 wave, 5dBd |                               |                                 |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                            | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                     | 10W / 120W                  | 10W / 120W                    | 10W / 120W                     |                               |                                 |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAE6013A,<br>1/2 wave, 2dBd   | HAE6031A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE6016A,<br>1/4 wave, 0dBd | RAE4014AR<br>B, 5/8 wave, 5dBd | HAE4004A,<br>1/4 wave, 0dBd | HAE4012A,<br>1/2 wave, 3.5dBd | HAE4013A,<br>1/2 wave, 3.5dBd  | RAE4015ARM,<br>5/8 wave, 5dBd | RAE40416ARB<br>, 5/8 wave, 5dBd |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                            | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                     | 10W / 120W                  | 10W / 120W                    | 10W / 120W                     | 10W / 120W                    | 10W / 120W                      |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7118         | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAF4013A,<br>1/4 wave, 3dBd   | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd | HAF4017A,<br>1/4 wave, 3dBd   |                             |                             |                                |                             |                               |                                |                               |                                 |
| Max Power: DVR / Mobile                         | 10W / 42W                                                                             | 10W / 42W                     | 10W / 42W                   | 10W / 42W                   | 10W / 42W                     |                             |                             |                                |                             |                               |                                |                               |                                 |

Table 7C Approved UHF1 DVRS Configurations- APX8500 HP

|                                                 |                                                                                       |                               |                             |                             |                               |                             |                             |                                |                             |                               |                                |                               |                                 |
|-------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------|-----------------------------|-----------------------------|-------------------------------|-----------------------------|-----------------------------|--------------------------------|-----------------------------|-------------------------------|--------------------------------|-------------------------------|---------------------------------|
| <b>DVR:</b> 7V083X03<br>(DQPM DVR5000P)         | <b>Freq Range:</b> 450-470MHz, <b>Trunk Mounted Antenna:</b> HAE4003A, 1/4 wave, 0dBd |                               |                             |                             |                               |                             |                             |                                |                             |                               |                                |                               |                                 |
| <b>FCC ID:</b> LO6-DVRSUHF                      | <b>Maximum conducted power delivered to antenna:</b> DVR (W) / Mobile (W)             |                               |                             |                             |                               |                             |                             |                                |                             |                               |                                |                               |                                 |
|                                                 |                                                                                       |                               |                             |                             |                               |                             |                             |                                |                             |                               |                                |                               |                                 |
|                                                 | <b>Roof Mounted Antenna</b>                                                           | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>    | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>     |
| <b>Mobile</b>                                   |                                                                                       |                               |                             |                             |                               |                             |                             |                                |                             |                               |                                |                               |                                 |
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAD4006A,<br>1/4 wave, 0dBd   | HAD4007A,<br>1/4 wave, 0dBd | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd   | HAD4016A,<br>1/4 wave, 0dBd | HAD4017A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd    | HAD4022A,<br>5/8 wave, 3dBd | RAD4010ARB,<br>1/2 wave, 3dBd |                                |                               |                                 |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                            | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                     | 10W / 120W                  | 10W / 120W                    |                                |                               |                                 |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAE6010A,<br>1/2 wave, 3.5dBd | HAE6011A,<br>5/8 wave, 5dBd | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd   | HAE6031A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd  | HAE6015A,<br>1/2 wave, 2dBd | HAE6016A,<br>1/4 wave, 0dBd   | RAE4014AR<br>B, 5/8 wave, 5dBd |                               |                                 |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                            | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                     | 10W / 120W                  | 10W / 120W                    | 10W / 120W                     |                               |                                 |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAE6013A,<br>1/2 wave, 2dBd   | HAE6031A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE6016A,<br>1/4 wave, 0dBd | RAE4014AR<br>B, 5/8 wave, 5dBd | HAE4004A,<br>1/4 wave, 0dBd | HAE4012A,<br>1/2 wave, 3.5dBd | HAE4013A,<br>1/2 wave, 3.5dBd  | RAE4015ARM,<br>5/8 wave, 5dBd | RAE40416ARB<br>, 5/8 wave, 5dBd |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                            | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                     | 10W / 120W                  | 10W / 120W                    | 10W / 120W                     | 10W / 120W                    | 10W / 120W                      |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7118         | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAF4013A,<br>1/4 wave, 3dBd   | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd | HAF4017A,<br>1/4 wave, 3dBd   |                             |                             |                                |                             |                               |                                |                               |                                 |
| Max Power: DVR / Mobile                         | 10W / 42W                                                                             | 10W / 42W                     | 10W / 42W                   | 10W / 42W                   | 10W / 42W                     |                             |                             |                                |                             |                               |                                |                               |                                 |

Table 7D Approved UHF2 DVRS Configurations- APX8500 HP

|                                                 |                                                                                       |                               |                             |                             |                               |                             |                             |                               |                             |                               |                               |                               |
|-------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------|-----------------------------|-----------------------------|-------------------------------|-----------------------------|-----------------------------|-------------------------------|-----------------------------|-------------------------------|-------------------------------|-------------------------------|
| <b>DVR:</b> 7V083X04<br>(DQPM DVR6000P)         | <b>Freq Range:</b> 470-512MHz, <b>Trunk Mounted Antenna:</b> HAE4004A, 1/4 wave, 0dBd |                               |                             |                             |                               |                             |                             |                               |                             |                               |                               |                               |
| <b>FCC ID:</b> LO6-DVRSUHF                      | <b>Maximum conducted power delivered to antenna:</b> DVR (W) / Mobile (W)             |                               |                             |                             |                               |                             |                             |                               |                             |                               |                               |                               |
|                                                 | <b>Roof Mounted Antenna</b>                                                           | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>   |
| <b>Mobile</b>                                   | <b>Antenna</b>                                                                        | <b>Antenna</b>                | <b>Antenna</b>              | <b>Antenna</b>              | <b>Antenna</b>                | <b>Antenna</b>              | <b>Antenna</b>              | <b>Antenna</b>                | <b>Antenna</b>              | <b>Antenna</b>                | <b>Antenna</b>                | <b>Antenna</b>                |
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAD4006A,<br>1/4 wave, 0dBd   | HAD4007A,<br>1/4 wave, 0dBd | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd   | HAD4016A,<br>1/4 wave, 0dBd | HAD4017A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd   | HAD4022A,<br>5/8 wave, 3dBd | RAD4010ARB,<br>1/2 wave, 3dBd |                               |                               |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                            | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                    |                               |                               |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAE6010A,<br>1/2 wave, 3.5dBd | HAE6011A,<br>5/8 wave, 5dBd | HAE6012A,<br>1/4 wave, 0dBd | HAE6013A,<br>1/2 wave, 2dBd   | HAE6031A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE6016A,<br>1/4 wave, 0dBd   | RAE4014ARB,<br>5/8 wave, 5dBd |                               |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                            | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                    | 10W / 120W                    |                               |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAE6013A,<br>1/2 wave, 2dBd   | HAE6031A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE6016A,<br>1/4 wave, 0dBd | RAE4014ARB,<br>5/8 wave, 5dBd | HAE4004A,<br>1/4 wave, 0dBd | HAE4012A,<br>1/2 wave, 3.5dBd | HAE4013A,<br>1/2 wave, 3.5dBd | RAE4015ARM,<br>5/8 wave, 5dBd |
| Max Power: DVR / Mobile                         | 10W / 120W                                                                            | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                  | 10W / 120W                    | 10W / 120W                  | 10W / 120W                    | 10W / 120W                    | 10W / 120W                    |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7118         | AN000131A01<br>, 1/4 wave, 0dBd                                                       | HAF4013A,<br>1/4 wave, 3dBd   | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd | HAF4017A,<br>1/4 wave, 3dBd   |                             |                             |                               |                             |                               |                               |                               |
| Max Power: DVR / Mobile                         | 10W / 42W                                                                             | 10W / 42W                     | 10W / 42W                   | 10W / 42W                   | 10W / 42W                     |                             |                             |                               |                             |                               |                               |                               |

Table 7E Approved UHF3 DVRS Configurations- APX8500 HP

|                                                 |                                                                                                                                                                     |                             |                             |                             |                               |                               |                             |                               |                               |                               |                               |                               |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-----------------------------|-------------------------------|-------------------------------|-----------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| <b>DVR:</b> 7V083X01<br>(DQPM DVR3000P)         | <b>Freq Range:</b> 136-174MHz, <b>Trunk Mounted Antenna:</b> HAD4006A, 1/4 wave, 0dBd, HAD4007A, 1/4 wave, 0dBd, HAD4008A, 1/4 wave, 0dBd, HAD4009A, 1/4 wave, 0dBd |                             |                             |                             |                               |                               |                             |                               |                               |                               |                               |                               |
| <b>FCC ID:</b> LO6-DVRSVHF                      | <b>Maximum conducted power delivered to antenna:</b> DVR (W) / Mobile (W)                                                                                           |                             |                             |                             |                               |                               |                             |                               |                               |                               |                               |                               |
|                                                 | <b>Roof Mounted Antenna</b>                                                                                                                                         | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b> | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>   | <b>Roof Mounted Antenna</b>   |
| <b>Mobile</b>                                   | <b>Antenna</b>                                                                                                                                                      | <b>Antenna</b>              | <b>Antenna</b>              | <b>Antenna</b>              | <b>Antenna</b>                | <b>Antenna</b>                | <b>Antenna</b>              | <b>Antenna</b>                | <b>Antenna</b>                | <b>Antenna</b>                | <b>Antenna</b>                | <b>Antenna</b>                |
| APX8500 VHF (136-174MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                                                                                                     | HAD4006A,<br>1/4 wave, 0dBd | HAD4007A,<br>1/4 wave, 0dBd | HAD4008A,<br>1/4 wave, 0dBd | HAD4009A,<br>1/4 wave, 0dBd   | HAD4016A,<br>1/4 wave, 0dBd   | HAD4017A,<br>1/4 wave, 0dBd | HAD4021A,<br>1/4 wave, 0dBd   | HAD4022A,<br>5/8 wave, 3dBd   | RAD4010ARB,<br>1/2 wave, 3dBd |                               |                               |
| Max Power: DVR / Mobile                         | 6W / 120W                                                                                                                                                           | 6W / 120W                   | 6W / 120W                   | 6W / 120W                   | 6W / 120W                     | 6W / 120W                     | 6W / 120W                   | 6W / 120W                     | 6W / 120W                     | 6W / 120W                     |                               |                               |
| APX8500 UHF (380-470MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                                                                                                     | HAE6011A,<br>5/8 wave, 5dBd | HAE6013A,<br>1/2 wave, 2dBd | HAE6031A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd   | HAE4011A,<br>1/2 wave, 3.5dBd | HAE6015A,<br>1/2 wave, 2dBd | HAE6016A,<br>1/4 wave, 0dBd   | RAE4014ARB,<br>5/8 wave, 5dBd |                               |                               |                               |
| Max Power: DVR / Mobile                         | 6W / 120W                                                                                                                                                           | 6W / 120W                   | 6W / 120W                   | 6W / 120W                   | 6W / 120W                     | 6W / 120W                     | 6W / 120W                   | 6W / 120W                     | 6W / 120W                     |                               |                               |                               |
| APX8500 UHF (450-520MHz)<br>FCC ID: AZ492FT7118 | AN000131A01<br>, 1/4 wave, 0dBd                                                                                                                                     | HAE6013A,<br>1/2 wave, 2dBd | HAE6031A,<br>1/2 wave, 2dBd | HAE4003A,<br>1/4 wave, 0dBd | HAE4011A,<br>1/2 wave, 3.5dBd | HAE6015A,<br>1/2 wave, 2dBd   | HAE6016A,<br>1/4 wave, 0dBd | RAE4014ARB,<br>5/8 wave, 5dBd | HAE4004A,<br>1/4 wave, 0dBd   | HAE4012A,<br>1/2 wave, 3.5dBd | HAE4013A,<br>1/2 wave, 3.5dBd | RAE4016ARB,<br>5/8 wave, 5dBd |
| Max Power: DVR / Mobile                         | 6W / 120W                                                                                                                                                           | 6W / 120W                   | 6W / 120W                   | 6W / 120W                   | 6W / 120W                     | 6W / 120W                     | 6W / 120W                   | 6W / 120W                     | 6W / 120W                     | 6W / 120W                     | 6W / 120W                     | 6W / 120W                     |
| APX8500 7/800MHz<br>FCC ID: AZ492FT7118         | AN000131A01<br>, 1/4 wave, 0dBd                                                                                                                                     | HAF4013A,<br>1/4 wave, 3dBd | HAF4014A,<br>1/4 wave, 3dBd | HAF4016A,<br>1/4 wave, 0dBd | HAF4017A,<br>1/4 wave, 3dBd   |                               |                             |                               |                               |                               |                               |                               |
| Max Power: DVR / Mobile                         | 6W / 42W                                                                                                                                                            | 6W / 42W                    | 6W / 42W                    | 6W / 42W                    | 6W / 42W                      |                               |                             |                               |                               |                               |                               |                               |

Table 7F Approved VHF DVRS Configurations- APX8500 HP

|                                                             |                                                                                                             |  |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--|
| <b>DVR:</b> 7V083X01<br>(DQPM DV R3000P)                    | <b>Freq Range:</b> 136-174 MHz, <b>Trunk Mounted Antenna:</b> HAD4006A, 4007A, 4008A, 4009A, 1/4 wave, 0dBd |  |
| FCC ID # LO6-DVRSVHF                                        | <b>Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)</b>                                   |  |
| <b>Mobile</b>                                               | <b>Roof Mounted Antenna</b>                                                                                 |  |
| APX2500/ APX4500 VHF (136-162MHz)<br>FCC ID: AZ492FT3826    | HAD40016A,<br>1/4 wave, 0dBd                                                                                |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                                                   |  |
| APX2500/ APX4500 VHF (146-174 MHz)<br>FCC ID: AZ492FT3826   | HAF4017A,<br>1/4 wave, 0dBd                                                                                 |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                                                   |  |
| APX2500/ APX4500 VHF (136-174 MHz)<br>FCC ID: AZ492FT3826   | HAD4021A,<br>1/4 wave, 0dBd                                                                                 |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                                                   |  |
| APX2500/ APX4500 VHF (136-144 MHz)<br>FCC ID: AZ492FT3826   | HAD4006A,<br>1/4 wave, 0dBd                                                                                 |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                                                   |  |
| APX2500/ APX4500 VHF (144-150.8 MHz)<br>FCC ID: AZ492FT3826 | HAD4007A<br>1/4 wave, 0dBd                                                                                  |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                                                   |  |
| APX2500/ APX4500 VHF (150.8-162 MHz)<br>FCC ID: AZ492FT3826 | HAD4008A,<br>1/4 wave, 0dBd                                                                                 |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                                                   |  |
| APX2500/APX4500 VHF (162-174 MHz)<br>FCC ID: AZ492FT3826    | HAD4009A,<br>1/4 wave, 0dBd                                                                                 |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                                                   |  |
| APX2500/APX4500 VHF (132-174 MHz)<br>FCC ID: AZ492FT3826    | *HAD4022A<br>5/8 wave, 3dBd                                                                                 |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                                                   |  |
| APX2500/APX4500 VHF (136-174 MHz)<br>FCC ID: AZ492FT3826    | *RAD4010ARB<br>1/2 wave, 3dBd                                                                               |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                                                   |  |

\*Antenna length trimmed to frequency

**Table 8 Approved VHF DVRS Configuration APX 2500 and APX 4500**

|                                                             |                                                                                        |  |
|-------------------------------------------------------------|----------------------------------------------------------------------------------------|--|
| <b>DVR:</b> 7V083X05<br>(DQPM DV7000P)                      | <b>Freq Range:</b> 764-870 MHz, <b>Trunk Mounted Antenna:</b> HAF4016A, 1/4 wave, 0dBd |  |
| FCC ID # LO6-DVRS700                                        | <b>Maximum conducted power delivered to antenna: DVR (W) / Mobile (W)</b>              |  |
| <b>Mobile</b>                                               | <b>Roof Mounted Antenna</b>                                                            |  |
| APX2500/ APX4500 VHF (136-162MHz)<br>FCC ID: AZ492FT3826    | HAD40016A,<br>1/4 wave, 0dBd                                                           |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                              |  |
| APX2500/ APX4500 VHF (146-174 MHz)<br>FCC ID: AZ492FT3826   | HAF4017A,<br>1/4 wave, 0dBd                                                            |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                              |  |
| APX2500/ APX4500 VHF (136-174 MHz)<br>FCC ID: AZ492FT3826   | HAD4021A,<br>1/4 wave, 0dBd                                                            |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                              |  |
| APX2500/ APX4500 VHF (136-144 MHz)<br>FCC ID: AZ492FT3826   | HAD4006A,<br>1/4 wave, 0dBd                                                            |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                              |  |
| APX2500/ APX4500 VHF (144-150.8 MHz)<br>FCC ID: AZ492FT3826 | HAD4007A<br>1/4 wave, 0dBd                                                             |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                              |  |
| APX2500/ APX4500 VHF (150.8-162 MHz)<br>FCC ID: AZ492FT3826 | HAD4008A,<br>1/4 wave, 0dBd                                                            |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                              |  |
| APX2500/APX4500 VHF (162-174 MHz)<br>FCC ID: AZ492FT3826    | HAD4009A,<br>1/4 wave, 0dBd                                                            |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                              |  |
| APX2500/APX4500 VHF (132-174 MHz)<br>FCC ID: AZ492FT3826    | *HAD4022A<br>5/8 wave, 3dBd                                                            |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                              |  |
| APX2500/APX4500 VHF (136-174 MHz)<br>FCC ID: AZ492FT3826    | *RAD4010ARB<br>1/2 wave, 3dBd                                                          |  |
| Max Power: DVR / Mobile                                     | 10W / 50W                                                                              |  |

\*Antenna length trimmed to frequency

**Table 9 Approved 700 DVRS Configuration APX 2500 and APX 4500**

## Antenna Installation Instructions



**IMPORTANT:** To assure optimum performance and compliance with FCC/ISED RF Energy Exposure regulations, these antenna installation guidelines and instructions are limited to metal-body vehicles with appropriate ground planes and take into account the potential exposure of back seat passengers and bystanders outside the vehicle.

### Selecting an Antenna Site/Location on a Metal Body Vehicle

#### 1. External installation

Check the requirements of the antenna supplier and install the vehicle antenna external to a metal body vehicle in accordance with those requirements.

#### 2. Roof top

**XTL mobile radio:** For optimum performance and compliance with RF Energy Safety standards, mount the mobile radio antenna in the center area of the roof.

**APX mobile radio:** For optimum performance and compliance with RF Energy Safety standards, mount the mobile radio antennas (dual and single band) at 45cm (17.7 inches) from the center as shown in the figure below. NOTE: For single band applications (one antenna), choose either side for the installation (not the center).

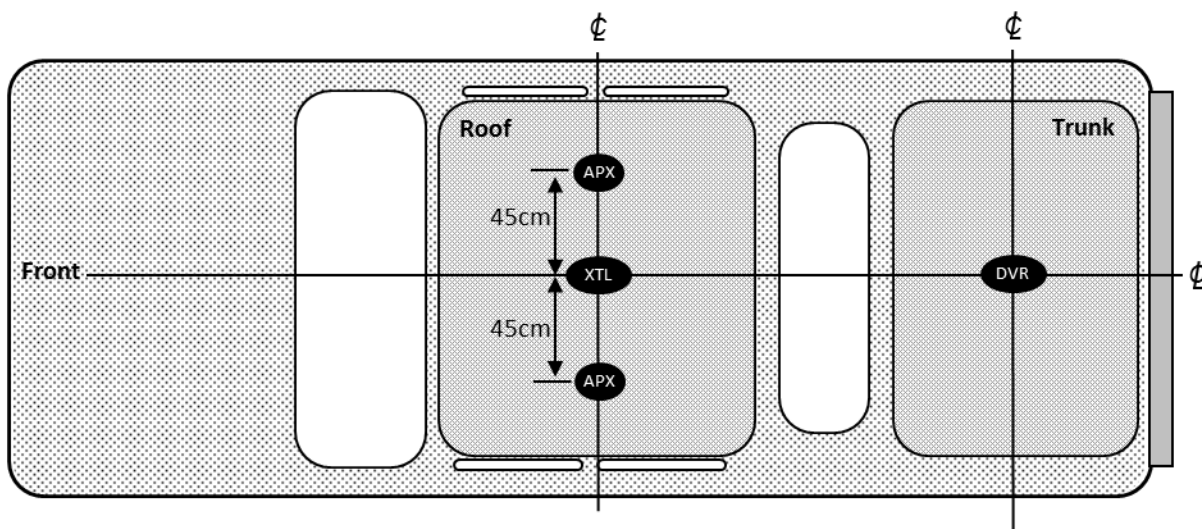


Fig.1 Applicable to XTL and Non APX 8500

**APX8500/APX8500 HP mobile radio:** For optimum performance and compliance with RF Energy Safety standards, mount the mobile radio antennas (all band and LMR 700/800 band) at location 2 only. Standard LMR VHF and UHF antennas should only be placed at location 1 & 3, which is 20cm (8 inches) from the center as shown in the figure below.

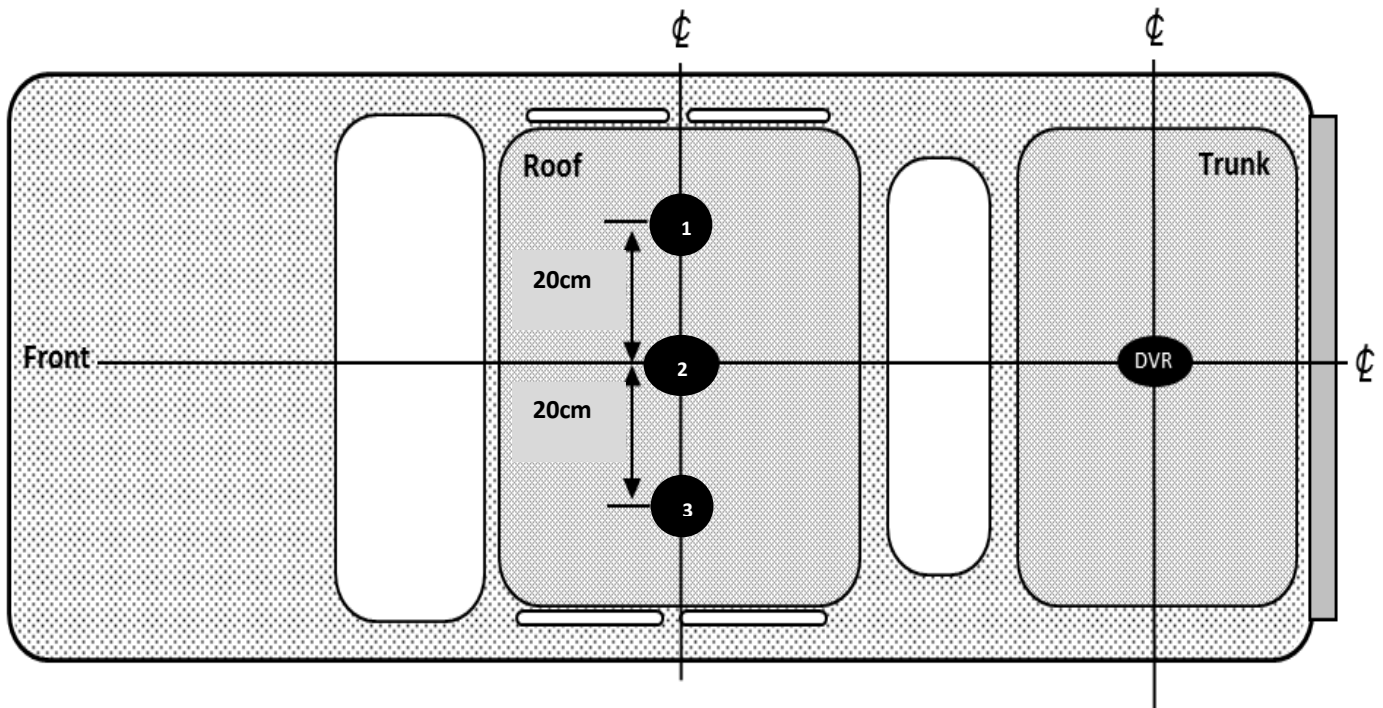


Fig.2 Applicable to APX8500/APX8500 HP only

### 3. Trunk lid

On some vehicles with clearly defined, flat trunk lids, the antennas of some radio models (see restrictions below) can also be mounted on the center area of the trunk lid. For vehicles without clearly defined, flat trunk lids (such as hatchback autos, sports utility vehicles, and pick-up trucks), mount the antenna in the center area of the roof.

#### ***Before installing an antenna on the trunk lid,***

- Be sure that the distance from the antenna location on the trunk lid will be at least 85 cm (33 inches) from the rear seat head-rest to ensure compliance with RF Energy Exposure regulations.
- Ensure that the trunk lid is grounded by connecting grounding straps between the trunk lid and the vehicle chassis.

***Do not install the trunk antenna if the distance between the back seat passenger and the trunk mount antenna is less than 85cm.***


### 4. Mounting restrictions for certain radio models.

**NOTE:** Do not cut antenna cables to ensure compliance with RF Energy Exposure regulations

**NOTE: VHF and UHF 1/4 wave antenna** should be mounted on the **roof**, not on the trunk lid, to ensure compliance with RF Energy Exposure regulations.

5. Ensure that the antenna cable can be easily routed to the radio. Route the antenna cable as far away as possible from any vehicle electronic control units and associated wiring.
6. Check the antenna location for any electrical interference.

**NOTE:** Any two metal pieces rubbing against each other (such as seat springs, shift levers, trunk and hood lids, exhaust pipes, etc.) in close proximity to the antenna can cause severe receiver interference.

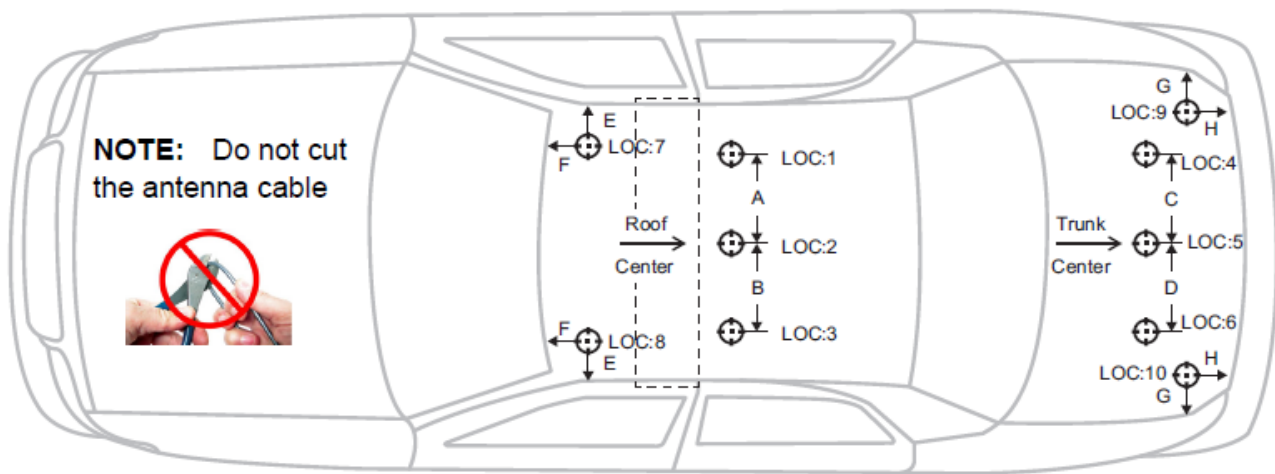

**Fig 3 Multiple Antennas Separation for locations 1-10**

Fig. 3 indicates the separation distances required for the various antennas used with an APX 8500 midpower radio. Each "cross-hair" symbol represents a possible location (i.e. LOC) of an antenna. The recommendation is to locate them as close to the center of the roof and/or trunk as possible, without interference with a lightbar. This picture is not drawn to scale. For letters A, B, C, and D, the table indicates the EXACT distance for separation of the LMR antennas. For letters E, F, G, and H, the table indicates the maximum distance between the edge of the ground plane and the accessory antenna location.

**NOTE:**


- A minimum of 18 inch separation is required between lightbar and any roof mounted antennas, to prevent interference with the lightbar circuitry (see lightbar manufacturer's installation information).
- The LMR 700/800 antennas should only be placed at LOC:2 or LOC:5.
- Standard LMR VHF and UHF antennas should only be placed at LOC:1, LOC:3, LOC:4 and LOC:6.
- 1/4 wave LMR VHF and UHF antennas should only be placed at LOC:1 and LOC:3 (i.e. Roof only) to ensure compliance with RF Energy Exposure regulations.
- The VML antenna must be separated from any LMR antenna by at least 40 inches.

- The LTE Main and Diversity Antenna locations should be at LOC:9 and LOC:10 when the LMR All-Band or LMR 700/800 narrow band antennas are at LOC:2 (i.e LTE opposite location from the LMR).
- The LTE Main and Diversity Antenna locations should be at LOC:7 and LOC:8 when the LMR All-Band or LMR 700/800 narrow band antennas are at LOC:5 (i.e LTE opposite location from the LMR).
- In some mobile installations that include an LTE modem, external filtering on the LMR port and/ or the LTE port may be needed to reduce interference. Contact your local Motorola Solutions Service Center for more information and for filter kit numbers (See Appendix for contact info).

**Table 7 Distance between Antenna**

| Characters | Distance | Characters | Distance |
|------------|----------|------------|----------|
| A          | 8 inches | E          | 8 inches |
| B          | 8 inches | F          | 8 inches |
| C          | 8 inches | G          | 8 inches |
| D          | 8 inches | H          | 8 inches |

## Multiplexers and Vehicle Installation

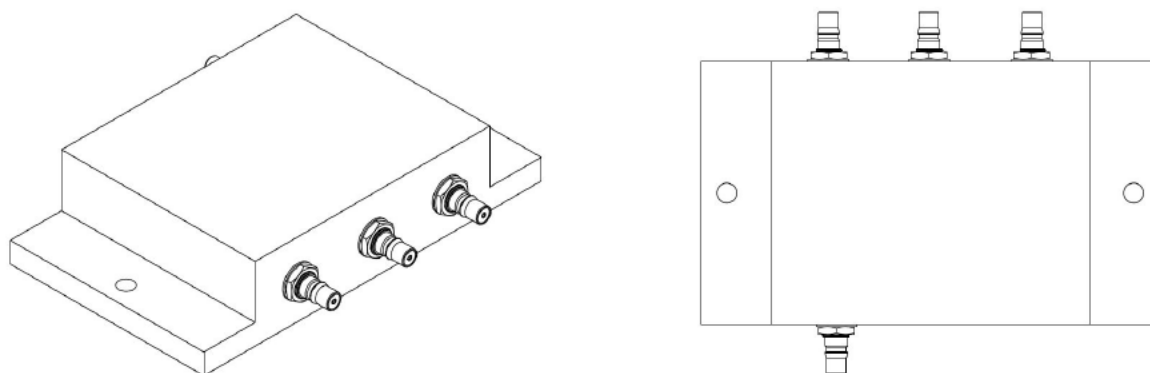
**Fig.4 Multiplexer Views**

## QMA Connection (APX8500/APX8500 HP Only)

APX8500 is using a quick disconnect connection called QMA. This does not require any tightening.

- Ensure there is sufficient slack in the antenna cable.
- Ensure that the collar of the antenna cable plug does not bind.
- Engage the QMA cable plug onto the jack, listening for a click to ensure proper engagement.
- Gently tug on the cable to ensure that it is engaged.
- To disengage, pull back on the cable plug's collar and pull the cable straight off the jack.

## GPS/GLONASS/Wi-Fi/Antenna Placement (APX8500/APX8500 HP Only)

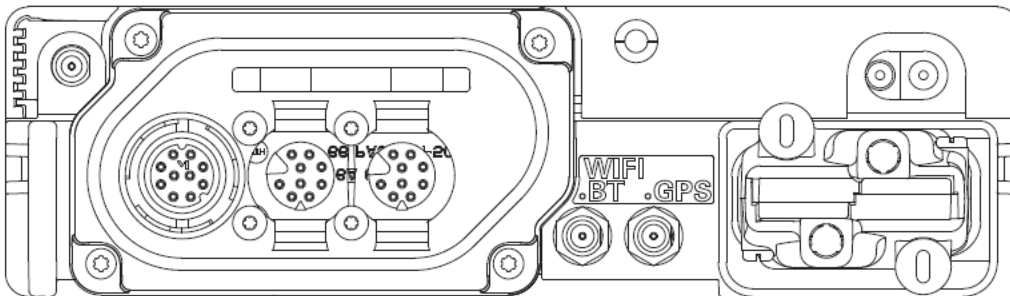

. Fig. 4 GPS/GLONASS and Wi-Fi Antenna Connector on the Back of the Mid Power Radio

### ***Mobile Radio / DVR Antenna separation***

To ensure interference-free performance when both the Mobile Radio and the DVR are active at the same time, the two antennas must be mounted in such way as to provide 30dB minimum antenna isolation.

### ***Fixed DURS Site Antennas***

Mobile radio equipment is sometimes installed at a fixed location and operated as a control station or as a fixed unit. In such cases the antenna installation must comply with the following requirements in order to assure optimal performance and make sure human exposure to radio frequency electromagnetic energy is within the guidelines set forth in the above standards.

- The antennas must be mounted outside the building.
- Mount the antennas on a tower if at all possible.
- If the antennas are to be mounted on a building then it must be mounted on the roof.
- As with all fixed site antenna installations, it is the responsibility of the licensee to manage the site in accordance with applicable regulatory requirements and may require additional compliance actions such as site survey measurements, signage, and site access restrictions in order to ensure that exposure limits are not exceeded.

## Temporary-Fixed Site

Futurecom requires the P25 Transportable DVRS (TDVRS) operator to ensure FCC/ISED Requirements for Radio Frequency Exposure are met. It is the responsibility of the Licensee to ensure that the appropriate separation distances between the antennas and bystanders are established and followed to meet the FCC/ISED Maximum Permissible Exposure (MPE) Requirements in any particular Temporary-Fixed location. In situations where a site assessment is not practical, it is recommended that the antennas be located **at least 9 feet from bystanders**. This should ensure MPE compliance in any Temporary-Fixed application and is likely to be a much greater separation distance than is necessary in most cases. Failure to observe the MPE distance exclusion area around the antenna may expose persons within this area to RF energy above the FCC/ISED exposure limits for bystanders (general population).

### Approved Antennas and Maximum output power (W) for combination DVR and APX mobiles for Temporary-Fixed Site

#### **NOTE:**

APX mobile RF conducted antenna power in the tables below denotes up to 50% Tx duty cycle.  
DVR RF conducted antenna power in the tables below denotes up to 100% Tx duty cycle.

#### **DVR**

| <b>Band</b>       | <b>Antenna</b> | <b>Power (W)</b> |
|-------------------|----------------|------------------|
| VHF (136-174MHz)  | DDN9014        | 6                |
| UHF1 (406-430MHz) | DDN9015        | 10               |
| UHF2 (450-470MHz) | DDN9015        | 10               |
| UHF3 (470-512MHz) | DDN9015        | 10               |
| 700 (768-806MHz)  | DDN9016        | 5                |
| 800 (806-869MHz)  | DDN9016        | 10               |

#### **APX 8500**

| <b>Band</b>          | <b>Antenna</b> | <b>Power (W)</b> |
|----------------------|----------------|------------------|
| VHF (136-174MHz)     | DDN9014        | 60               |
| UHF1 (406-470MHz)    | DDN9015        | 48               |
| UHF2 (450-520MHz)    | DDN9015        | 54               |
| 700/800 (764-870MHz) | DDN9016        | 42               |

**Max Power (W) for combination DVR and APX 8500**

|            |                | <b>APX 8500</b> |              |              |                   |
|------------|----------------|-----------------|--------------|--------------|-------------------|
|            | <b>DVR/APX</b> | <b>VHF</b>      | <b>UHFR1</b> | <b>UHFR2</b> | <b>700/800MHz</b> |
| <b>DVR</b> | <b>VHF</b>     | 6/60            | 6/48         | 6/54         | 6/42              |
|            | <b>UHFR1</b>   | 10/60           | 10/48        | 10/54        | 10/42             |
|            | <b>UHFR2</b>   | 10/60           | 10/48        | 10/54        | 10/42             |
|            | <b>UHFR3</b>   | 10/60           | 10/48        | 10/54        | 10/42             |
|            | <b>700MHz</b>  | 5/60            | 5/48         | 5/54         | 5/42              |
|            | <b>800MHz</b>  | 10/60           | 10/48        | 10/54        | 10/42             |