

TABLE OF CONTENTS LIST FOR PART 90 UHF DEVICE

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

TEST REPORT:

PAGE	1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE	2.....TECHNICAL DESCRIPTION CONTINUED
PAGE	3.....RF POWER OUTPUT,
PAGE	4.....MOD CHARACTERISTICS
PAGE	5.....AUDIO FREQUENCY RESPONSE PLOT
PAGE	6-11...MODULATION LIMITING PLOTS
PAGE	12.....AUDIO LOW PASS FILTER PLOT
PAGE	13-14...OCCUPIED BANDWIDTH
PAGE	15-19...OCCUPIED BANDWIDTH PLOTS
PAGE	20.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE	21.....METHOD OF MEASURING SPURIOUS EMISSIONS AT ANTENNA TERM.
PAGE	22-23...FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE	24.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE	25.....FREQUENCY STABILITY
PAGE	26-27...TRANSIENT FREQUENCY STABILITY
PAGE	29-29...TRANSIENT FREQUENCY RESPONSE PLOTS - 12.5 kHz LOW POWER
PAGE	30-31...TRANSIENT FREQUENCY RESPONSE PLOTS - 12.5 kHz HIGH POWER
PAGE	32-33...TRANSIENT FREQUENCY RESPONSE PLOTS - 25 kHz LOW POWER
PAGE	34-35...TRANSIENT FREQUENCY RESPONSE PLOTS - 25 kHz HIGH POWER
PAGE	36-37...SPECTRAL EFFICIENCY PROC. & PLOTS - 9600 & 19200 baud
PAGE	38-40...LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT	1.....FCC ID LABEL SAMPLE
EXHIBIT	2.....LABEL LOCATION
EXHIBIT	3.....SCHEMATICS
EXHIBIT	4.....BLOCK DIAGRAM
EXHIBIT	5.....THEORY OF OPERATION
EXHIBIT	6.....EXTERNAL PHOTOGRAPHS
EXHIBIT	7.....INTERNAL PHOTOGRAPHS - COMPONENT VIEW
EXHIBIT	8.....INTERNAL PHOTOGRAPHS - COPPER VIEW
EXHIBIT	9.....ALIGNMENT PROCEDURE
EXHIBIT	10.....USER MANUAL
EXHIBIT	11.....TEST SET-UP PHOTO

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

2.1033 MIDLAND RADIO CORPORATION will sell the
(c)(1)(2) FCC ID: MMA70201BD VHF transceiver in quantity,
for use under FCC RULES PART 90, 22, 74

2.1033 (c) TECHNICAL DESCRIPTION
2.1033 (3) User Manual See Exhibit 13

2.1033 (4) Type of Emission: 20K0F3D For 25 kHz
90.209 11K25F3D For 12.5 kHz
11K0F3E For 12.5 kHz
18K0F3E For 25 kHz

For 25 kHz

$B_n = 2M + 2DK$
 $M = 19,200$ Bits per second
 $D = 0.40$ kHz (Peak Deviation)
 $K = 1$
 $B_n = 2(19200/2) + 2(400)(1) = 19.2k + 0.8k = 20.0k$

90.209(b)(5) AUTHORIZED BANDWIDTH = 20.00 kHz.

For 12.5 kHz

$B_n = 2M + 2DK$
 $M = 9,600$ Bits per second
 $D = 0.825$ kHz (Peak Deviation)
 $K = 1$
 $B_n = 2(9600/2) + 2(0.825k)(1) = 9.6k + 1.65k = 11.25k$

90.209(b)(5) AUTHORIZED BANDWIDTH = 11.25 kHz.

For 12.5 kHz

$B_n = 2M + 2DK$
 $M = 3000$ Hz
 $D = 2.5$ kHz (Peak Deviation)
 $K = 1$
 $B_n = 2(3000) + 2(2.5)(1) = 6k + 5k = 11k$

90.209(b)(5) AUTHORIZED BANDWIDTH = 11.25 kHz.

For 25 kHz

$B_n = 2M + 2DK$
 $M = 3000$ Hz
 $D = 6000$ Hz (Peak Deviation)
 $K = 1$
 $B_n = 2(3000) + 2(6000) = 6k + 12k = 18k$

90.209(b)(5) AUTHORIZED BANDWIDTH = 20.00 kHz.

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

- 2.1033(c)(5) Frequency Range: 440-470 MHz
- 2.1033(c)(6) Power Range and Controls: There are NO user Power controls.
- 2.1033(c)(7) Maximum Output Power Rating:
5/1 Watts, into a 50 ohm resistive load.
- 2.1033(c)(8) DC Voltages and Current into Final Amplifier:
Power Input - See next page.
- 2.1033(c)(9) Tune-up procedure. The tune-up procedure is given in EXHIBIT 12.
- 2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 3. The block diagram is included as EXHIBIT 4.
- Instruction book. The instruction manual is included as EXHIBIT 13.
- 2.1033(c)(11) A photograph or drawing of the equipment identification label is shown in Exhibit 1.
- 2.1033(c)(12) Photographs of the equipment of sufficient clarity to reveal equipment construction and layout and label location are shown in Exhibit 7-11.
- 2.1033(c)(13) For equipment employing digital modulation, a detailed description of the modulation technique. This UUT uses FSK to modulate the transmitter.
- 2.1033(c)(14) data required for 2.1046 to 2.1057 See Below
- 90.203(e) There are NO user controls and the frequency of this unit must be programmed using software not provided to the end user.

2.1046(a) RF power output.

RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 12.0 VDC, and the transmitter properly adjusted the RF output measures:

POWER OUTPUT


INPUT POWER - HIGH: $(12V)(1.380A) = 16.56 \text{ Watts}$

INPUT POWER - LOW: $(12V)(.640A) = 7.68 \text{ Watts}$

OUTPUT POWER: HIGH - 5 Watts

LOW - 1 Watts

METHOD OF MEASURING RF POWER OUTPUT

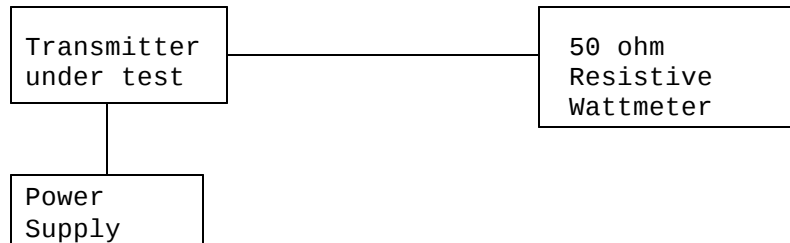

2.1047(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE


The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on page 5. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured.

2.1047(b) Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are shown in pages 6-8. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

Post Limiter Filter The filter must be between the modulation limiter and the modulated stage. At any frequency between 3 & 20 kHz the filter must have an attenuation of $60\log(f/3)$ greater than the attenuation at 1KHz. See the plot; page 9.

AUDIO FREQUENCY RESPONSE PLOT

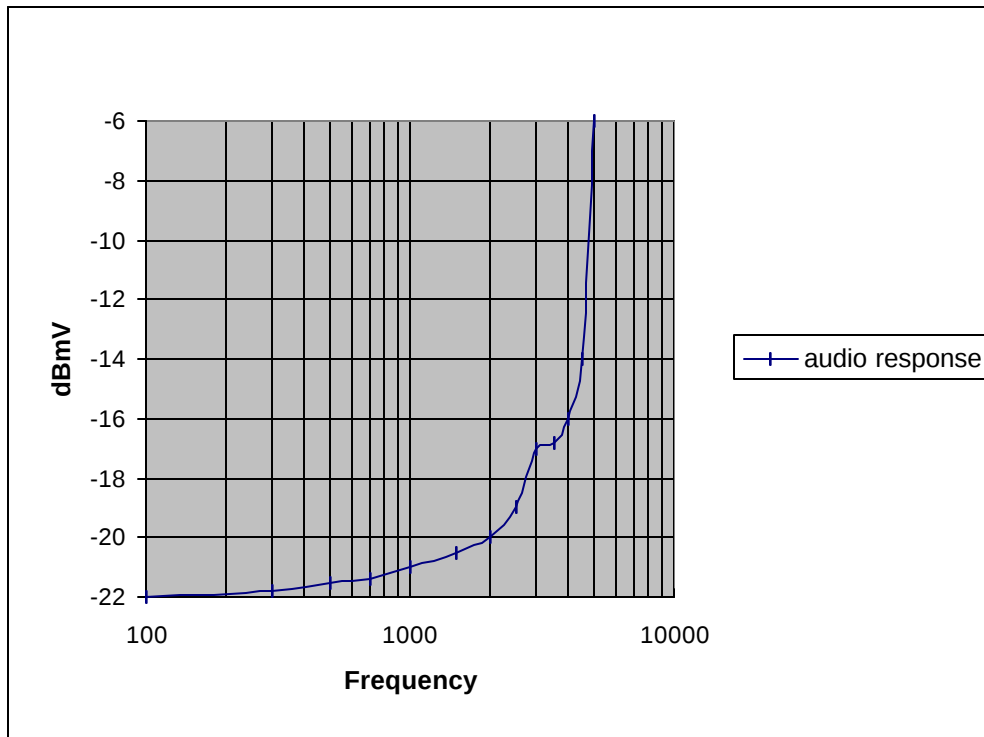


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

Page 5 of 40

MODULATION LIMITING PLOT FOR 25 KHz CHANNEL SPACING - 300 Hz

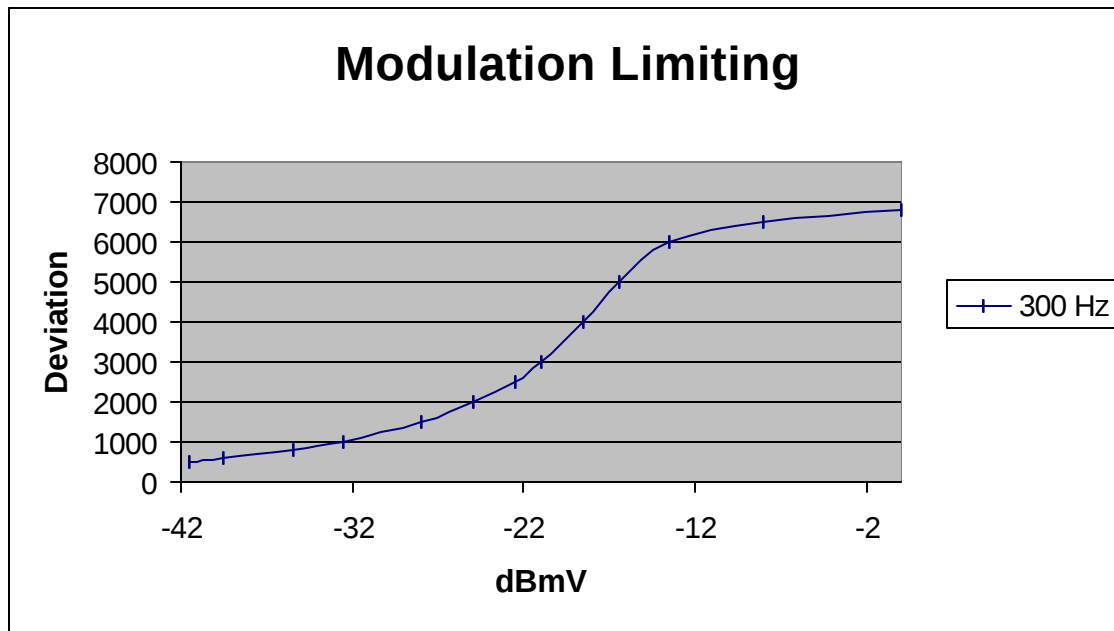


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

Page 6 of 40

MODULATION LIMITING PLOT FOR 25 kHz CHANNEL SPACING - 1000 Hz

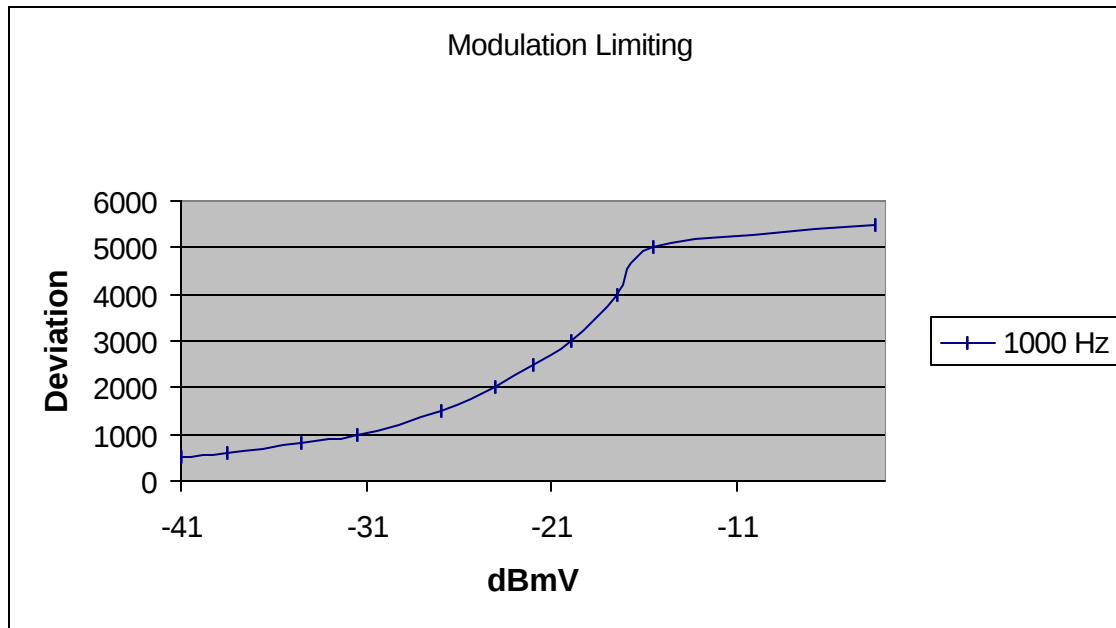


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

Page 7 of 40

MODULATION LIMITING PLOT FOR 25 KHz CHANNEL SPACING - 2500 Hz

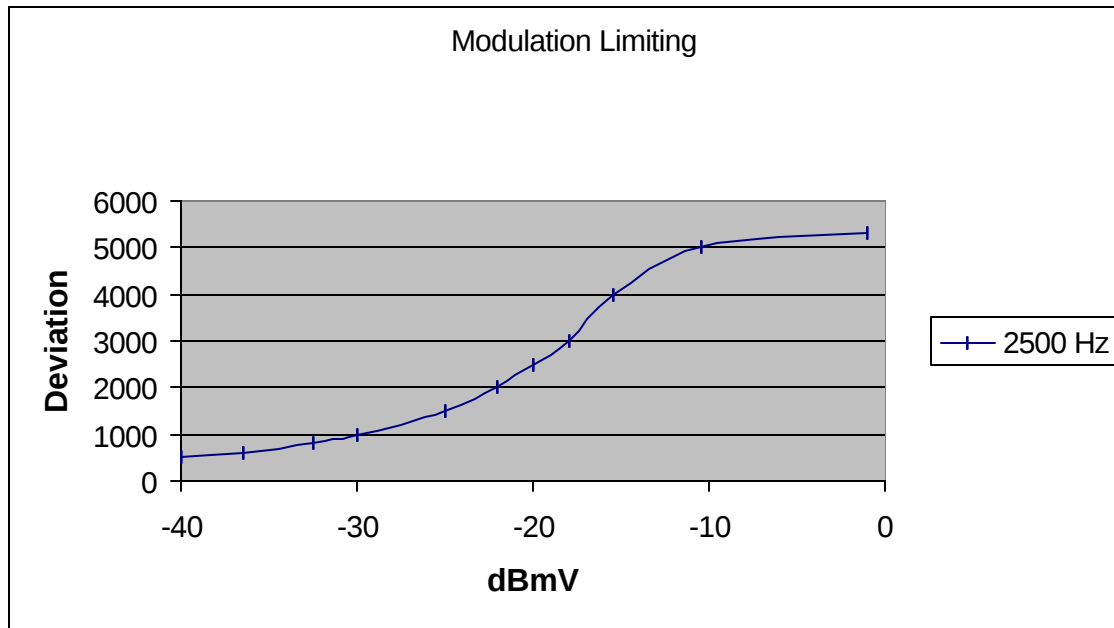


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

Page 8 of 40

MODULATION LIMITING PLOT FOR 12.5 kHz SPACING

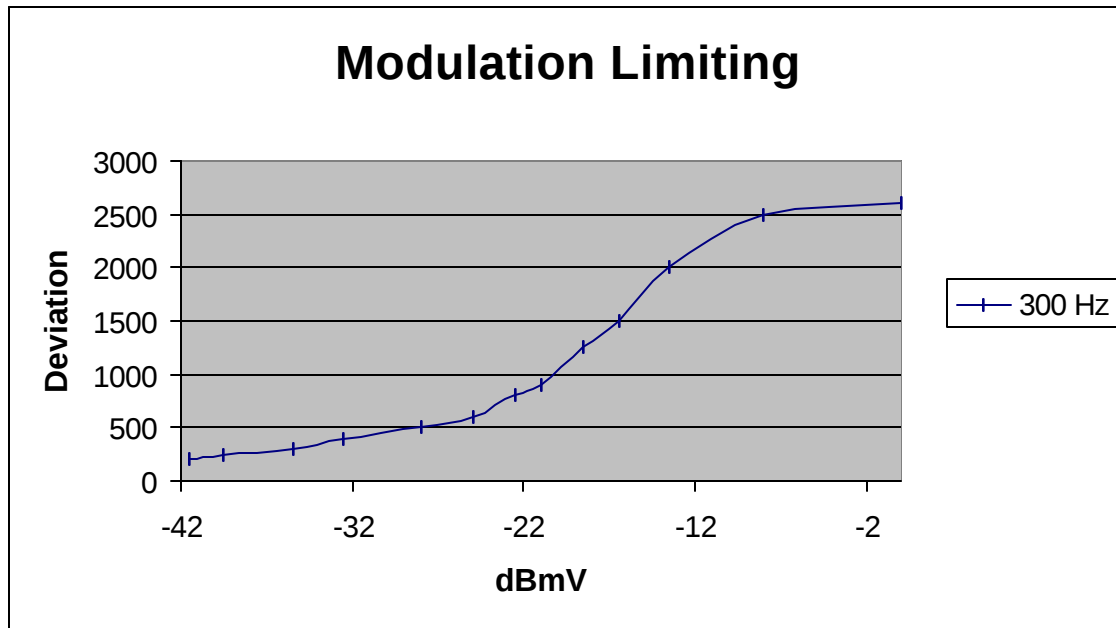


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

MODULATION LIMITING PLOT FOR 12.5 kHz SPACING - 1000 Hz

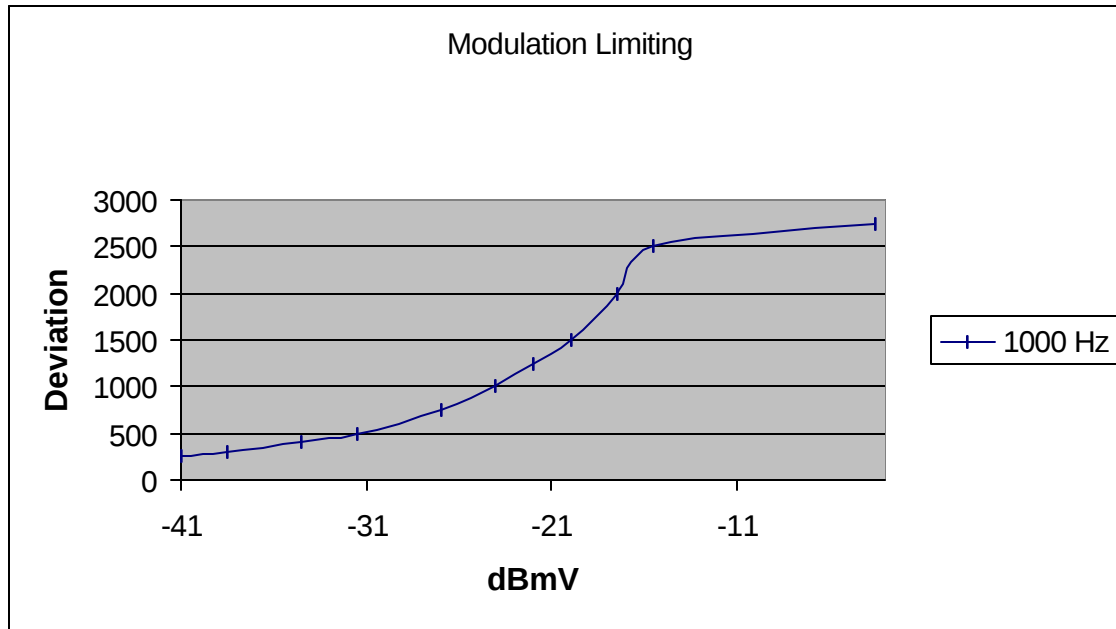


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

MODULATION LIMITING PLOT FOR 12.5 kHz SPACING

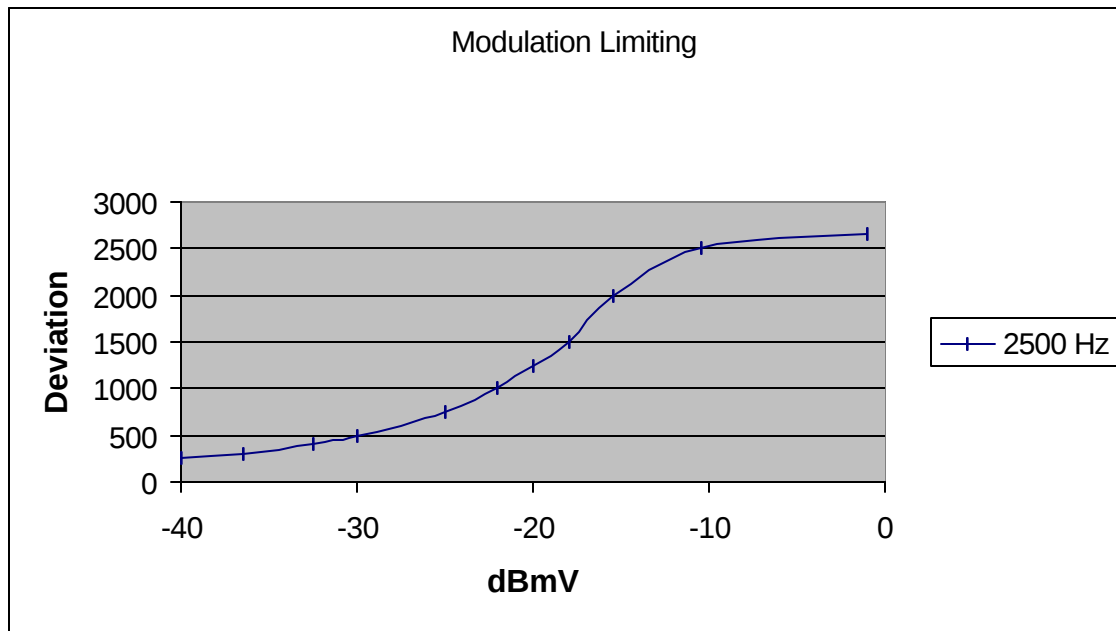


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

Audio Lowpass Filter

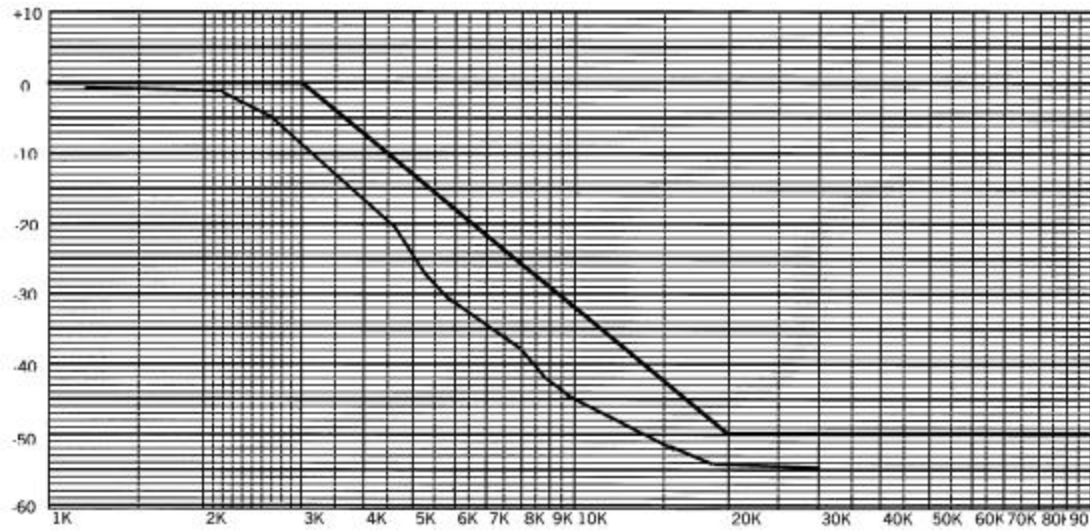

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

Page 12 of 40

2.1049 Occupied bandwidth:

90.210(c,)

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211(b), the power of any emission must be attenuated below the unmodulated carrier output power as follows;

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency(f_d in kHz) of more than 5 kHz but not more than 10 kHz: At least $83 \log(f_d/5)$ dB;
- (2) ON any frequency removed from the center of the authorized bandwidth by a displacement frequency(f_d in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least $29 \log(f_d^2/11)$ dB or 50 dB, whichever is the lesser attenuation;
- (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least $43 + 10 \log(P_o)$ dB.

90.210(d) Emission Mask D - 12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.

(2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27 (f_d - 2.88 \text{ kHz})$ dB.

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.


Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + \log(P)$ dB.

Radiotelephone transmitter with modulation limiter.


Test procedure: TIA/EIA-603 para 2.2.11 , with the exception that various tones were used.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

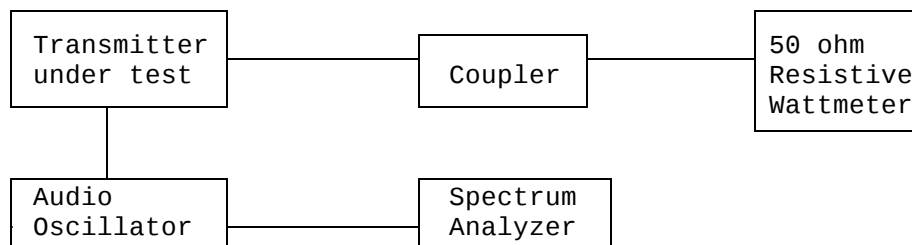

OCCUPIED BANDWIDTH PLOT - 9600 BAUD

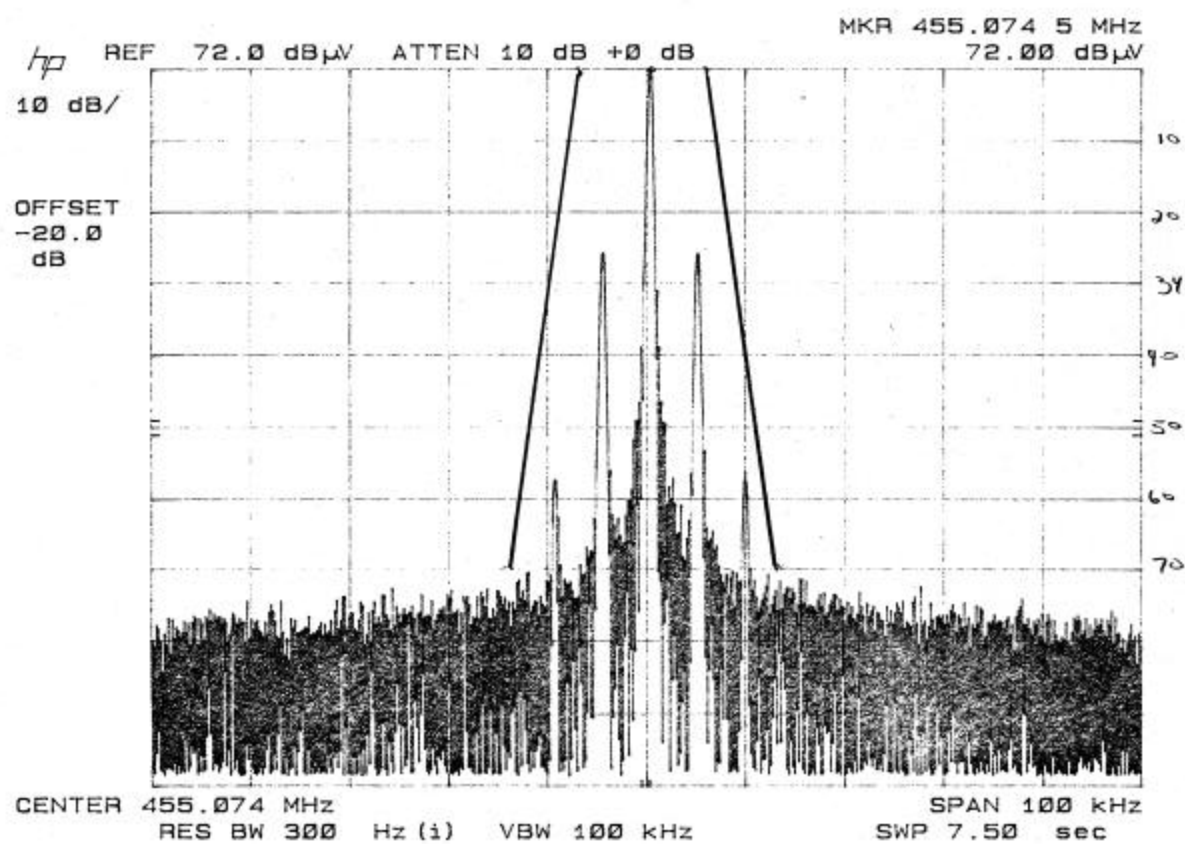


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

Page 15 of 40

OCCUPIED BANDWIDTH PLOT - 19.2K BAUD

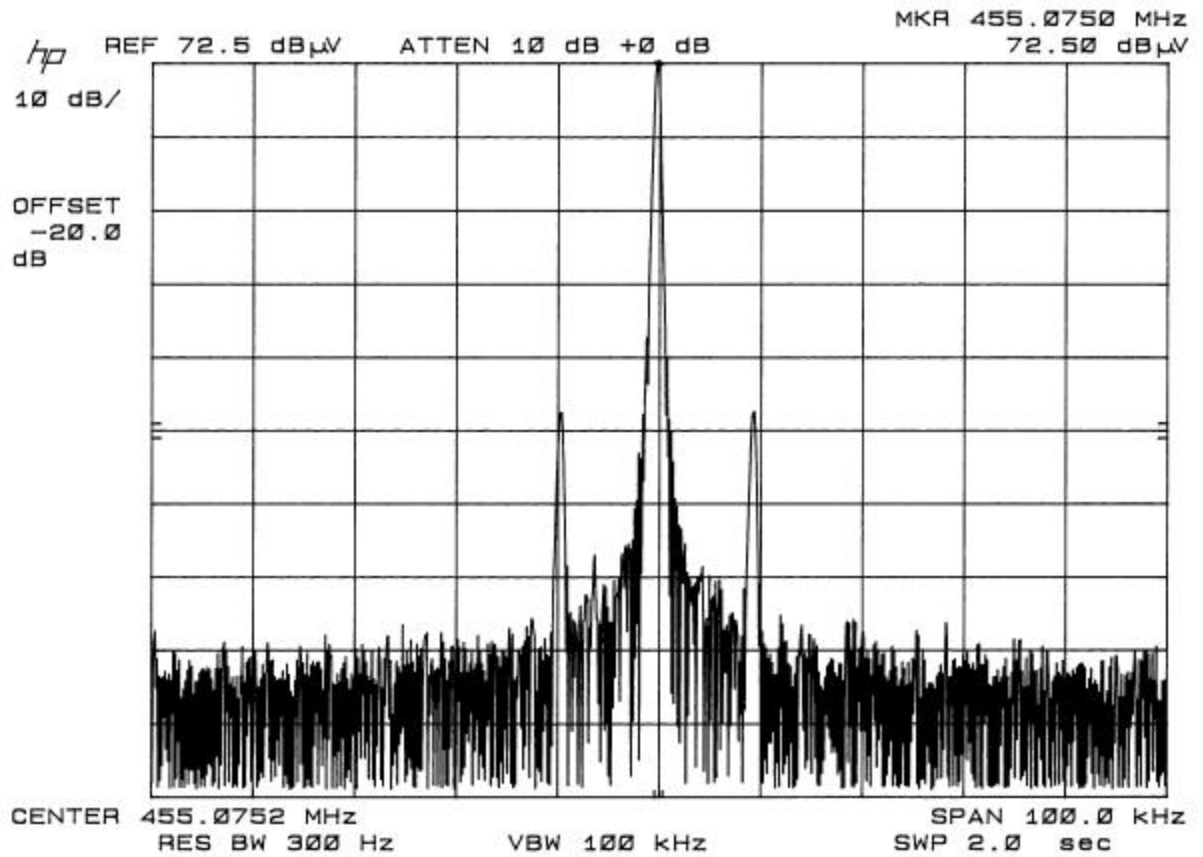


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

OCCUPIED BANDWIDTH PLOT

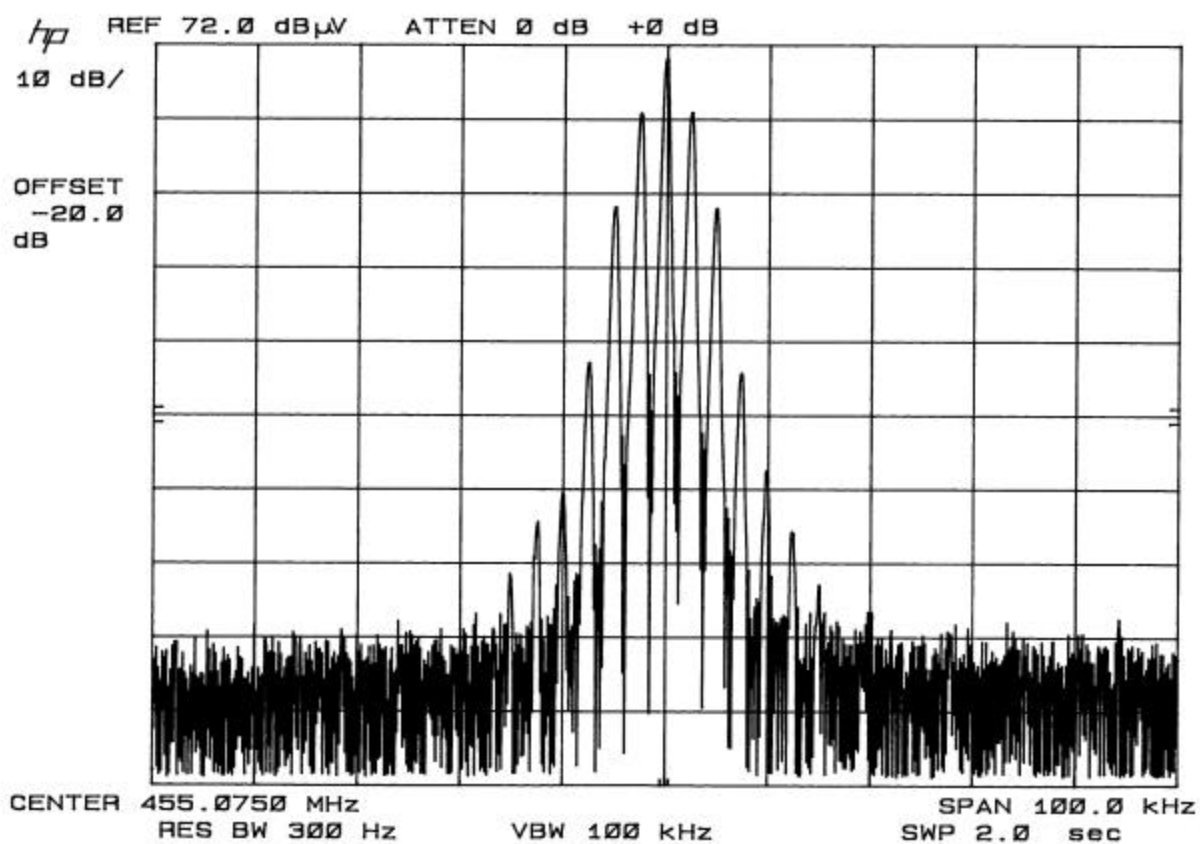


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

OCCUPIED BANDWIDTH PLOT

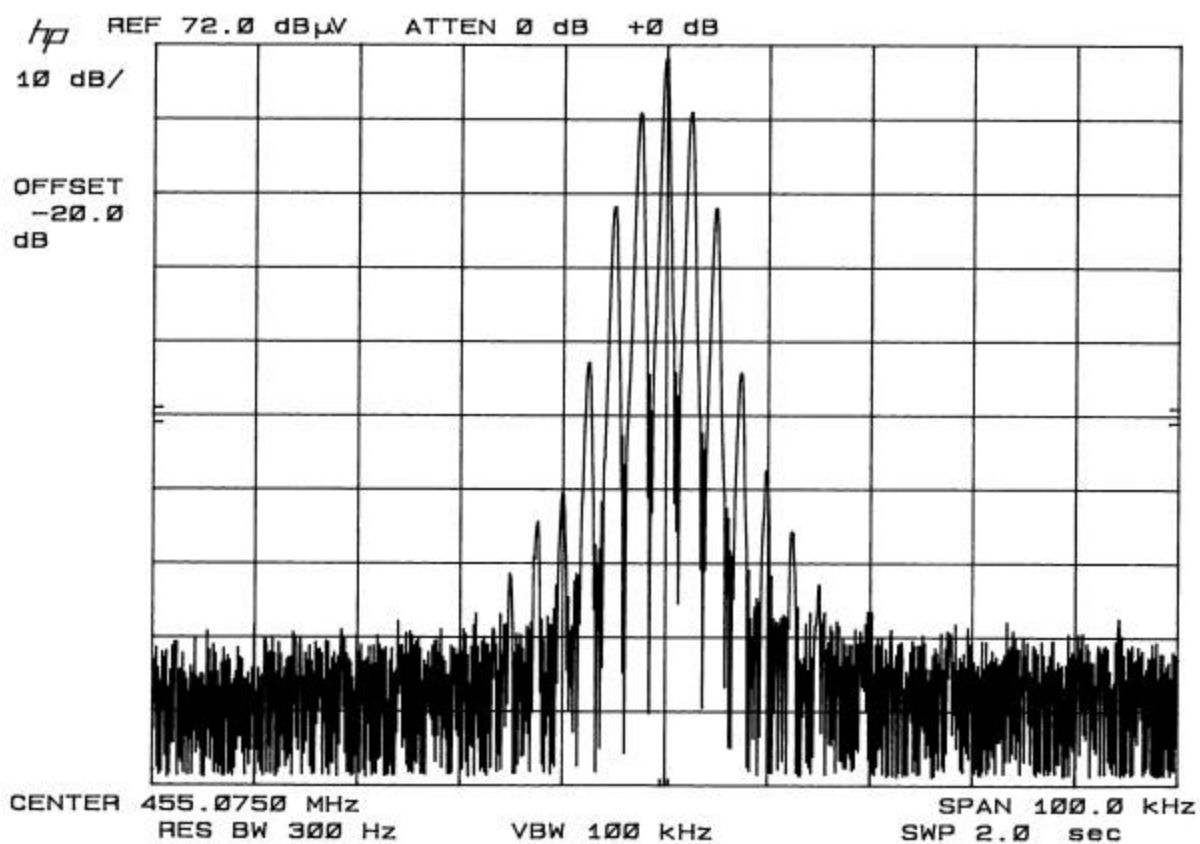


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

OCCUPIED BANDWIDTH PLOT CW

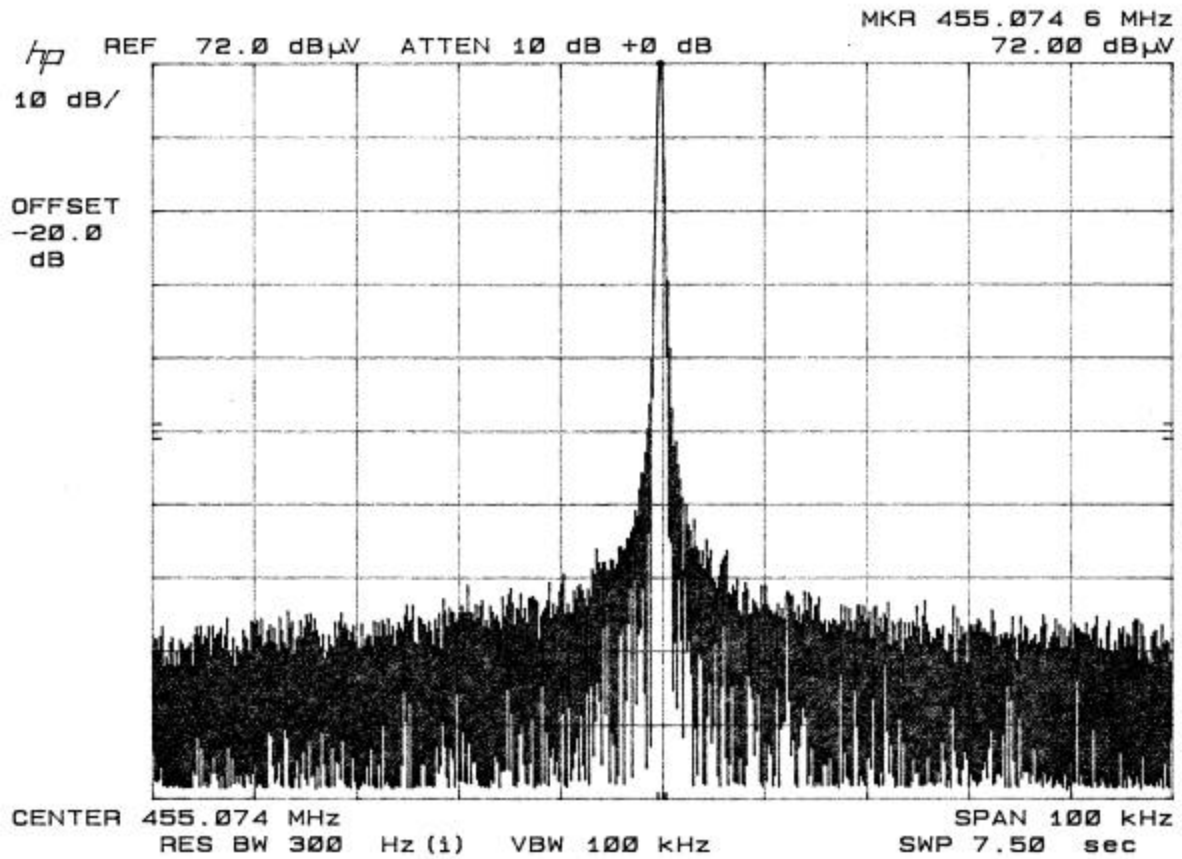

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

2.1051 Spurious emissions at antenna terminals(conducted):
 2.1052 Data on the following page shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

For 25 kHz

HIGH POWER: $43 + 10\log(5) = 50$ dB

LOW POWER: $43 + 10\log(1) = 43$ dB

EMISSION FREQUENCY MHz	dB BELOW CARRIER HIGH POWER	dB BELOW CARRIER LOW POWER
440.00	00.0	00.0
880.10	75.3	74.4
1320.20	84.7	77.2
1760.30	97.6	89.1
2200.40	95.4	89.5
2640.50	102.6	95.7
3080.60	86.3	77.8
3520.70	67.7	58.9
3960.80	63.7	59.5
4400.90	77.0	78.1

For 12.5 kHz

HIGH POWER: $50 + 10\log(5) = 57$ dB

LOW POWER: $50 + 10\log(1) = 50$ dB


EMISSION FREQUENCY MHz	dB BELOW CARRIER HIGH POWER	dB BELOW CARRIER LOW POWER
440.00	00.0	00.0
880.10	75.3	74.4
1320.20	84.7	77.2
1760.30	97.6	89.1
2200.40	95.4	89.5
2640.50	102.6	95.7
3080.60	86.3	77.8
3520.70	67.7	58.9
3960.80	63.7	59.5
4400.90	77.0	78.1

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

Method of Measuring Conducted Spurious Emissions

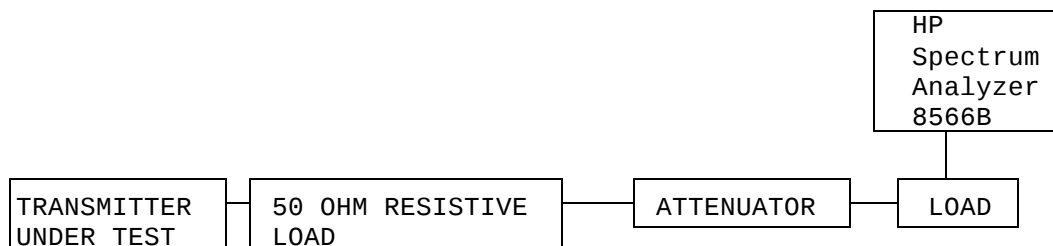

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load through a pre-selector filter of the spectrum analyzer. The spectrum was scanned from 400 kHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 849 N.W. State Road 45, Newberry, Florida 32669.

2.1053 Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be $50 + 10\log(P_o)$ dB below the mean power output of the transmitter for 12.5 kHz and $43 + 10\log(P_o)$ dB for 25 kHz.

For 25 kHz

HIGH POWER: $43 + 10\log(5) = 50$ dB

LOW POWER: $43 + 10\log(1) = 43$ dB

TEST DATA (HIGH):

Emission Frequency MHz	dBc	Generator dBm	Margin dB
440.00	0	27	0.00
880.10	78	-51	28
1,320.20	84	-57	34
1,760.30	83	-56	33
2,200.40	91	-64	41
2,640.50	88	-61	38
3,080.60	73	-46	23
3,520.70	72	-45	22
3,960.80	66	-39	16
4,400.90	81	-54	31

TEST DATA (LOW):

Emission Frequency MHz	dBc	Generator dBm	Margin dB
440.00	0	20	0.00
880.10	74	-54	31
1,320.20	81	-61	38
1,760.30	78	-58	35
2,200.40	86	-66	43
2,640.50	87	-67	44
3,080.60	63	-43	20
3,520.70	64	-44	21
3,960.80	62	-42	19
4,400.90	79	-59	36

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

2.1053 Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be $50 + 10\log(P_o)$ dB below the mean power output of the transmitter for 12.5 kHz and $43 + 10\log(P_o)$ dB for 25 kHz.

For 12.5 kHz

HIGH POWER: $50 + 10\log(5) = 57$ dB

LOW POWER: $50 + 10\log(1) = 50$ dB

TEST DATA (HIGH):

Emission Frequency MHz	dBc	Generator dBm	Margin dB
440.00	0	27	0.00
880.10	78	-51	21
1,320.20	84	-57	27
1,760.30	83	-56	26
2,200.40	91	-64	34
2,640.50	88	-61	31
3,080.60	73	-46	16
3,520.70	72	-45	15
3,960.80	66	-39	9
4,400.90	81	-54	24

TEST DATA (LOW):

Emission Frequency MHz	dBc	Generator dBm	Margin dB
440.00	0	20	0.00
880.10	74	-54	24
1,320.20	81	-61	31
1,760.30	78	-58	28
2,200.40	86	-66	36
2,640.50	87	-67	37
3,080.60	63	-43	13
3,520.70	64	-44	14
3,960.80	62	-42	12
4,400.90	79	-59	29

APPLICANT: MIDLAND RADIO CORPORATION


FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

Page 23 of 40

METHOD OF MEASUREMENTS: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

Method of Measuring Radiated Spurious Emissions

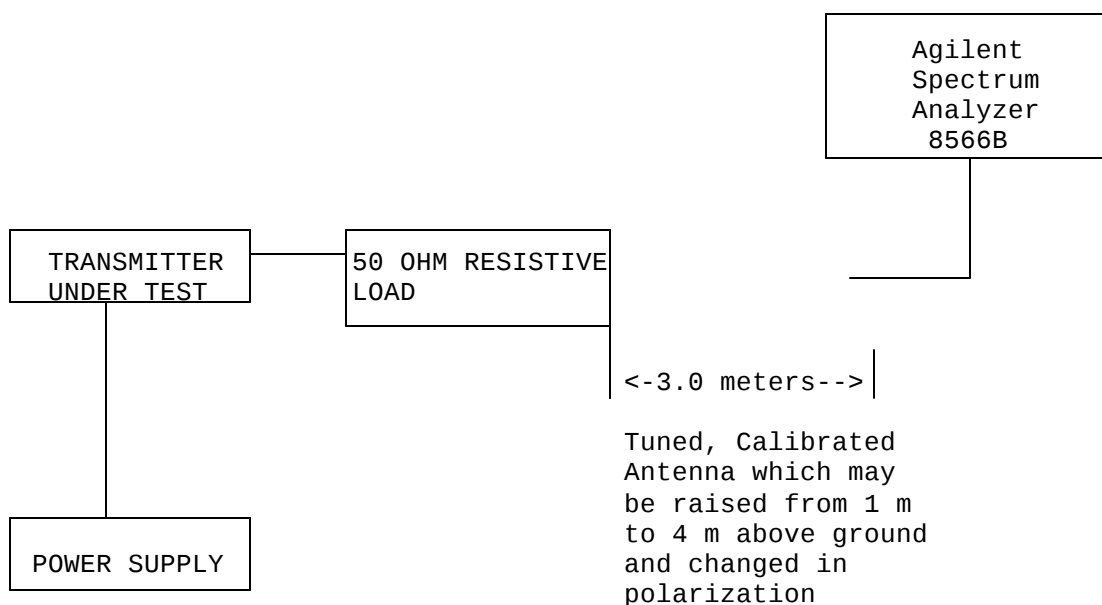

Equipment placed 80 cm above ground on a rotatable platform.

2.1055 Frequency stability:

90.213(a)(1)

Temperature and voltage tests were performed to verify that the frequency remains within the .00015%, 1.5 ppm specification limit, for 25 kHz spacing & 0.00025%, 2.5 ppm, for 12.5 kHz spacing and 0.0001%, 1.0 ppm for 6.25 kHz spacing. The test was conducted as follows:

The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the supply voltage.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 465.000 000 MHz

TEMPERATURE_°C	FREQUENCY_MHz	PPM
REFERENCE_____	465.000 000	00.0
-30_____	465.000 205	+00.44
-20_____	465.000 079	+00.17
-10_____	465.000 109	+00.23
0_____	465.000 144	+00.31
+10_____	465.000 210	+00.45
+20_____	465.000 221	+00.48
+30_____	465.000 175	+00.38
+40_____	465.000 096	+00.21
+50_____	465.000 071	+00.15

-15% Battery End-Point VDC 465.000 212 +00.46
+15% Battery End-Point VDC 465.000 215 +00.46

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was +0.48 ppm.

2.1055(a)(1) Frequency stability:
90.214 Transient Frequency Behavior


REQUIREMENTS: In the 450-500MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:

Time Interval	Maximum Frequency	Portable Radios 450-500 MHz
t1	+12.5 kHz	10.0 ms
t2	+6.25 kHz	25.0 ms
t3,t4	+12.5 kHz	10.0 ms

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.


2.1055 Frequency stability:
90.214 Transient Frequency Behavior
(Continued)

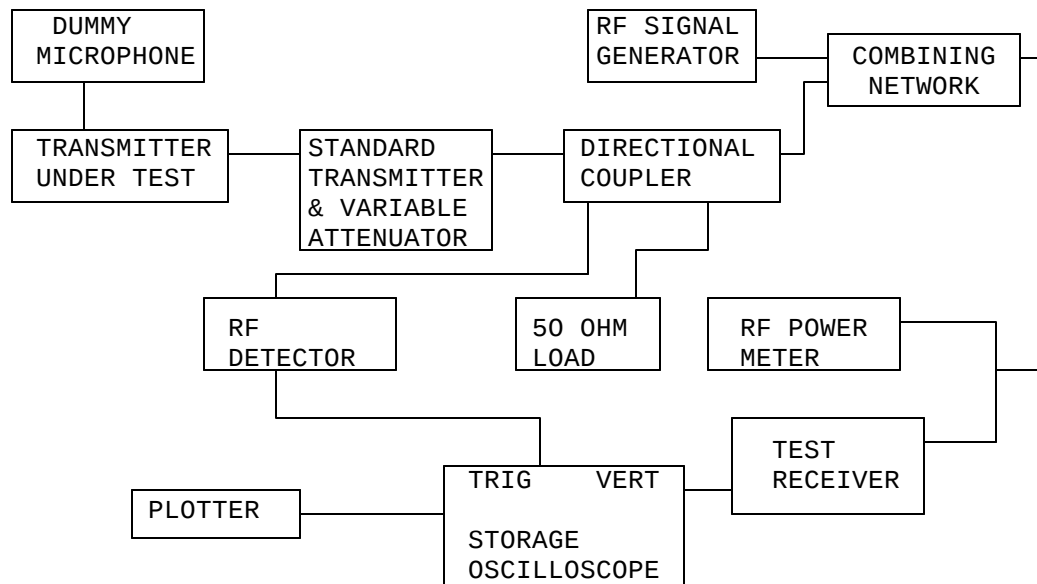

2.10 Measurement Procedures for Type Acceptance:

Measurement techniques have been in accordance with TIA/EIA STD 603-1992.

TRANSIENT FREQUENCY RESPONSE GRAPH - 12.5K LOW POWER

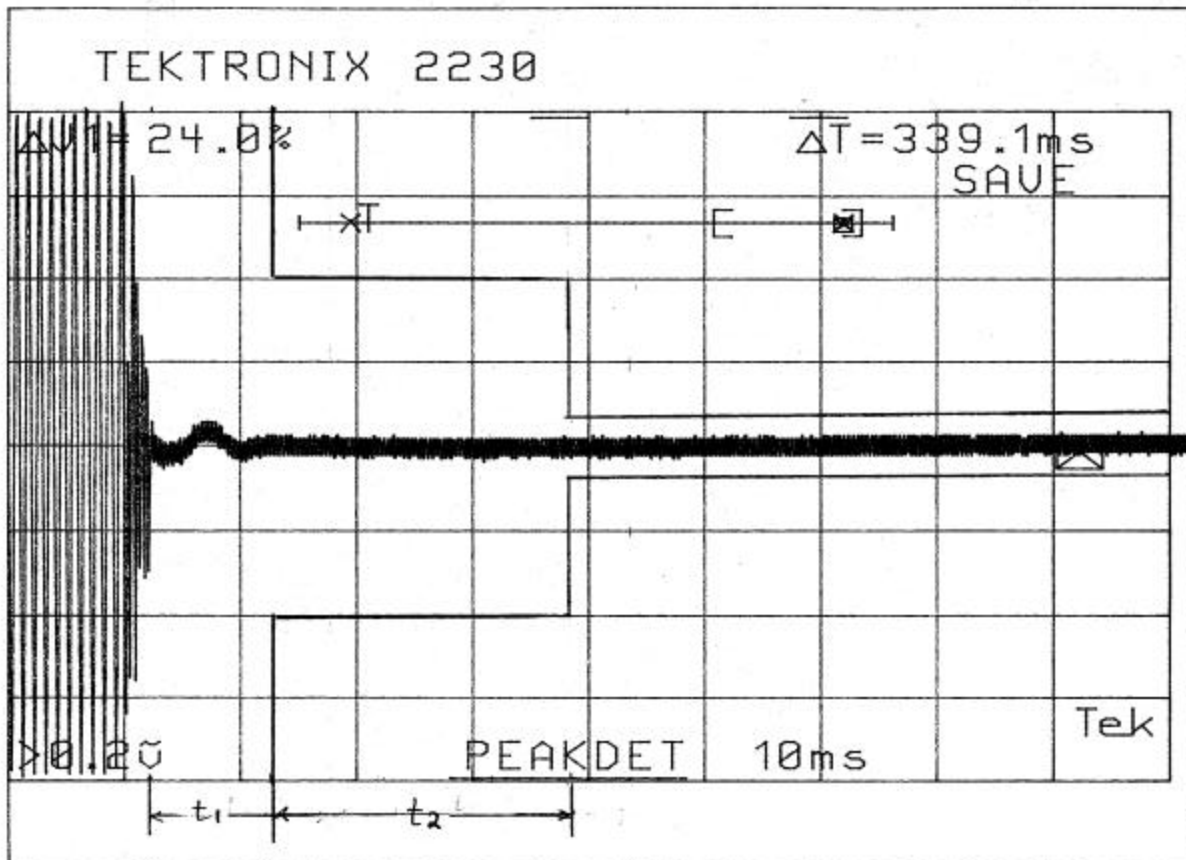


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

TRANSIENT FREQUENCY RESPONSE GRAPH - 12.5K LOW POWER

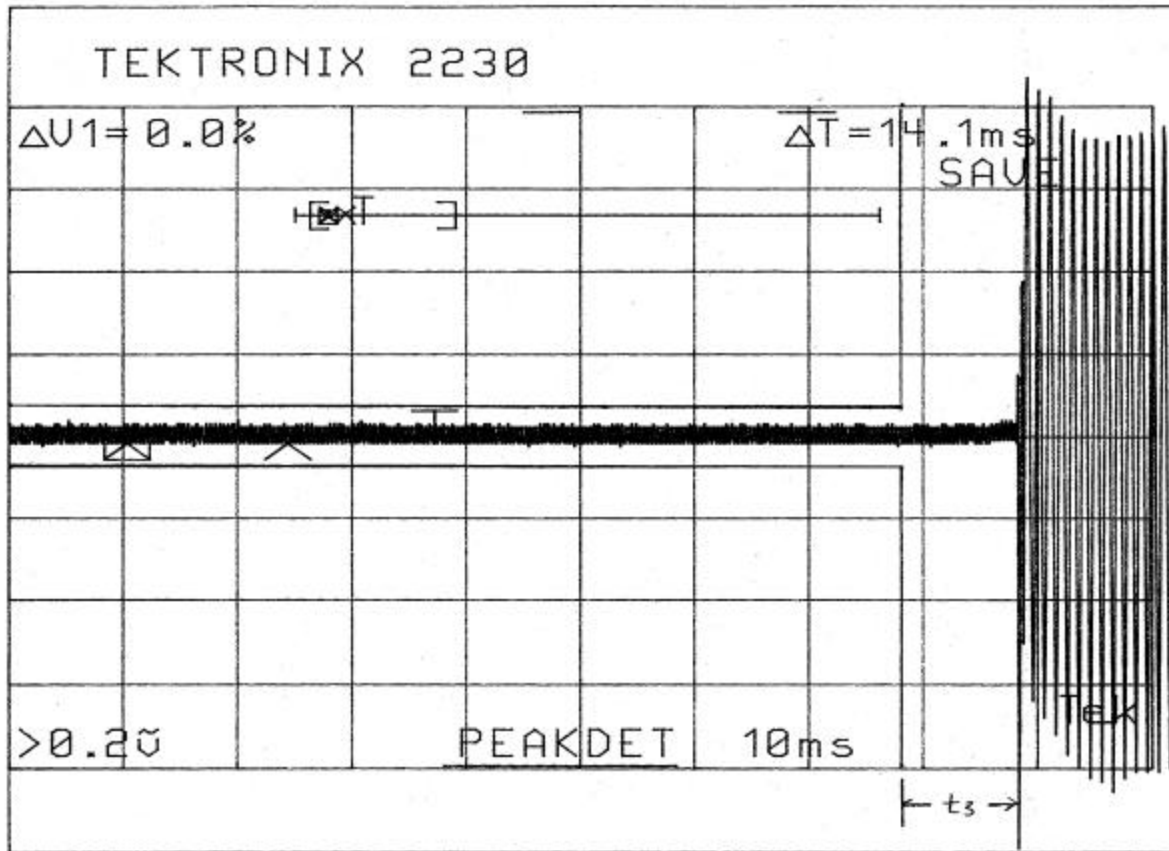


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

TRANSIENT FREQUENCY RESPONSE GRAPH - 12.5K HIGH POWER

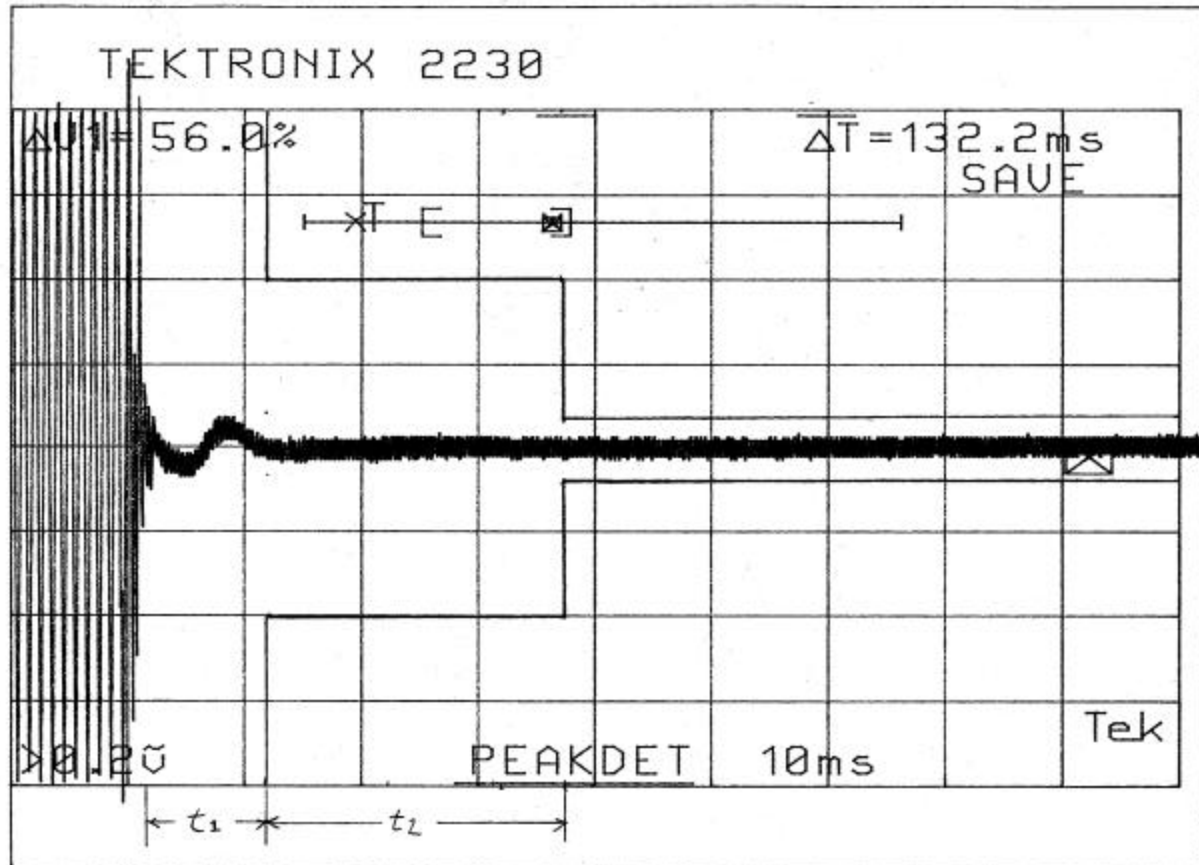


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

TRANSIENT FREQUENCY RESPONSE GRAPH - 12.5K HIGH POWER

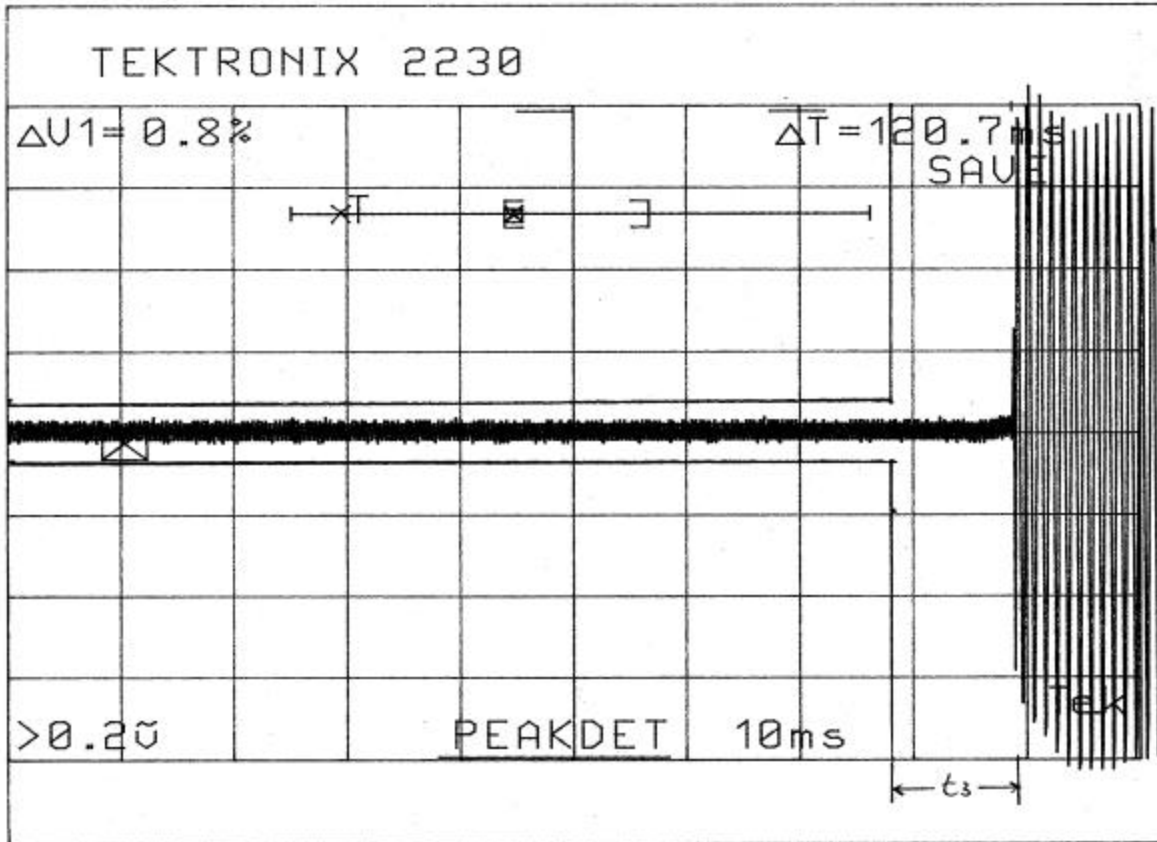


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

TRANSIENT FREQUENCY RESPONSE GRAPH - 25K LOW POWER

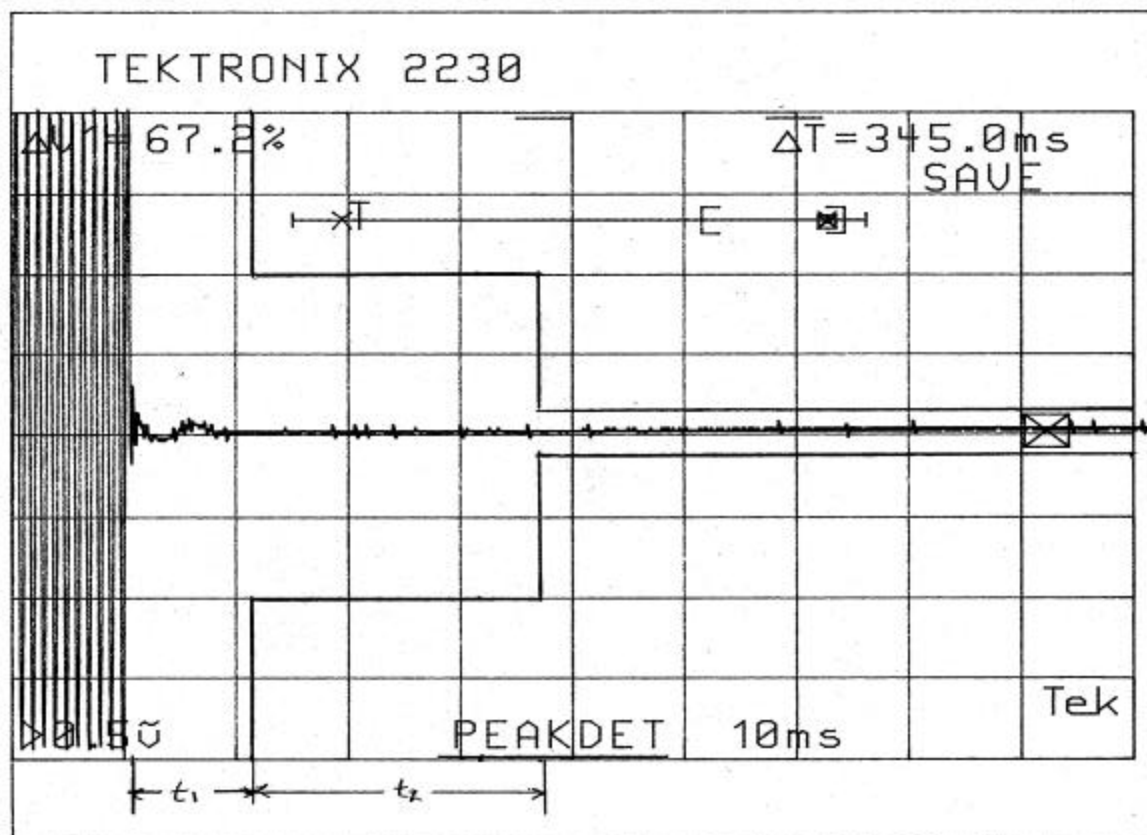


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

TRANSIENT FREQUENCY RESPONSE GRAPH - 25K LOW POWER

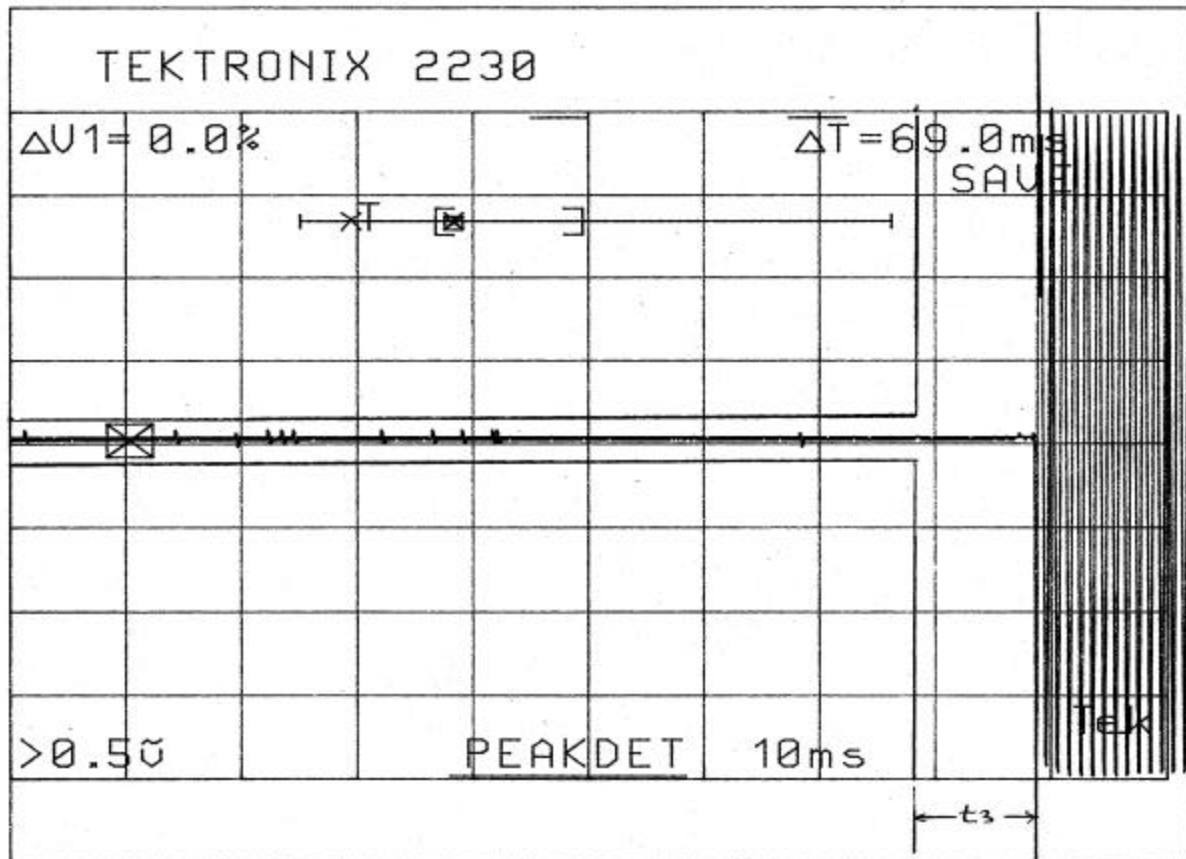


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

TRANSIENT FREQUENCY RESPONSE GRAPH - 25K HIGH POWER

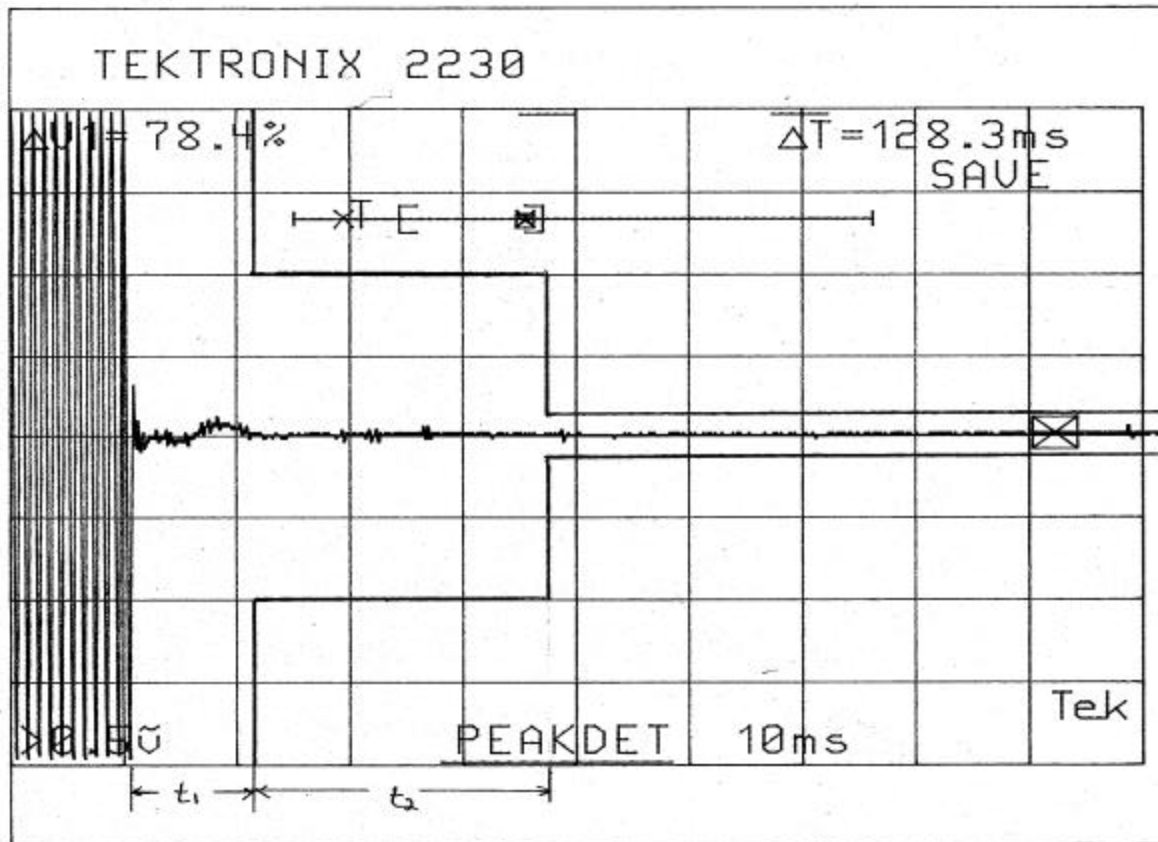


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

TRANSIENT FREQUENCY RESPONSE GRAPH - 25K HIGH POWER

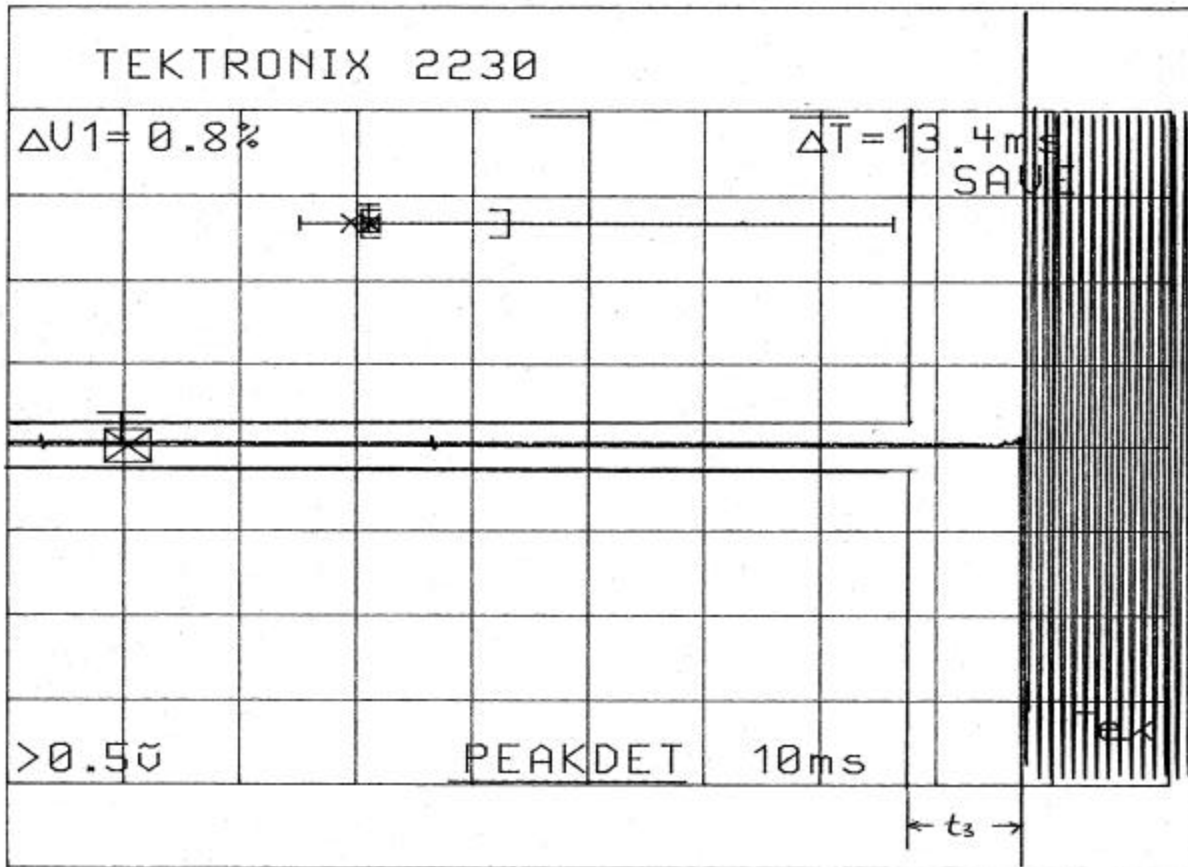


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc


SPECTRAL EFFICIENCY

Procedure: The RF transmitters carrier is modulated by an audio generator that is set to frequencies that are equivalent to 9600 and 19200 baud. The RF output is then demodulated by a standard receiver and plotted. The results are shown below.

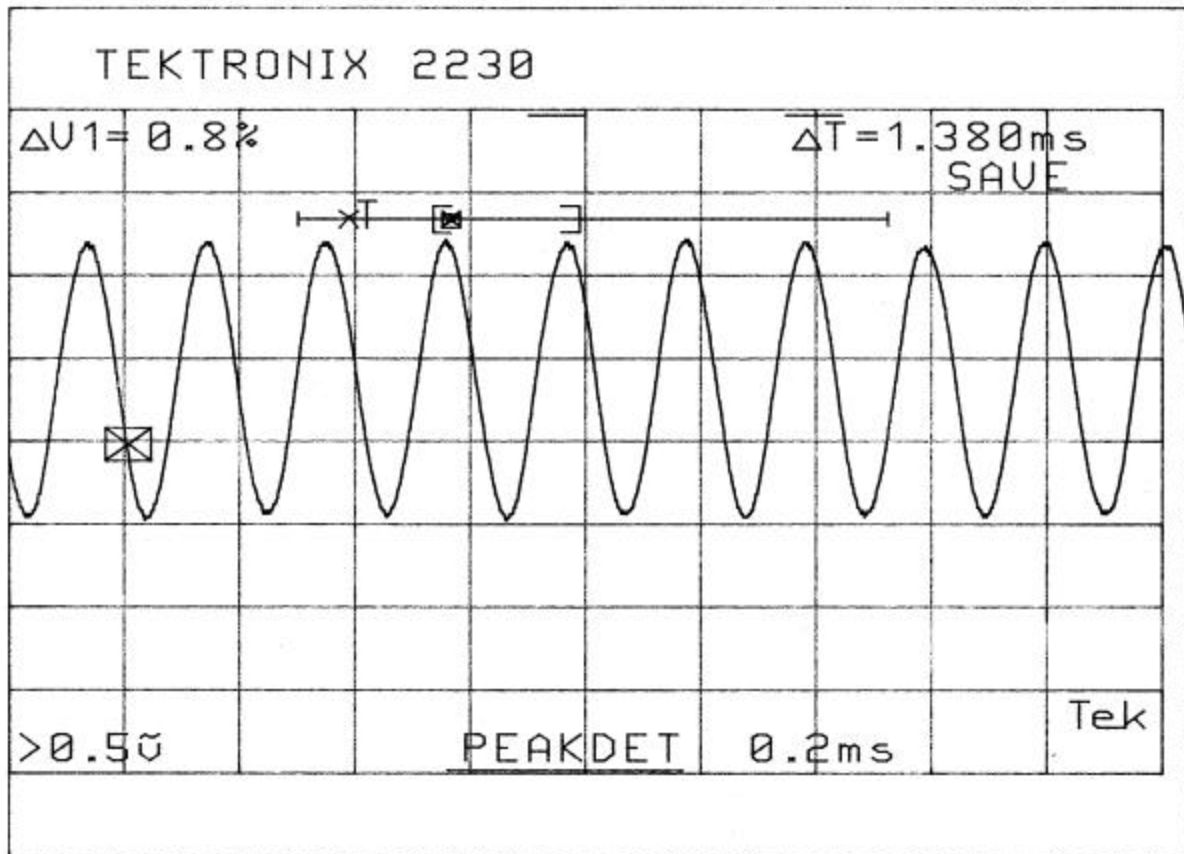

Spectral Efficiency 9600 baud

Spectral Efficiency 19200 baud

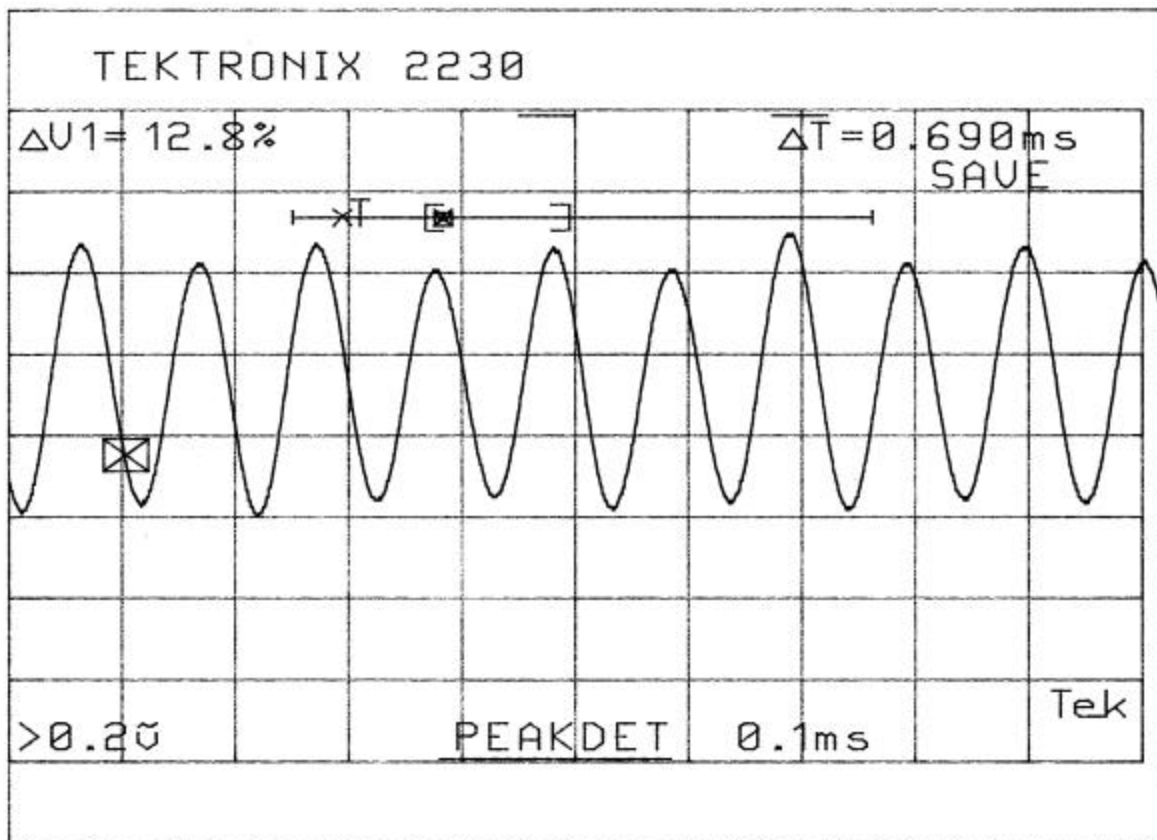

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2\924UT2TestReport.doc

EMC Equipment List

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
X	3-Meter OATS	TEI	N/A	N/A	Listed 12/22/99	12/22/02
	3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
	Receiver, Beige Tower Spectrum Analyzer (Tan)	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/03
	RF Preselector (Tan)	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
	Quasi-Peak Adapter (Tan)	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
X	Receiver, Blue Tower Spectrum Analyzer (Blue)	HP	8568B	2928A04729 2848A18049	CHAR 10/22/01	10/22/03
X	RF Preselector (Blue)	HP	85685A	2926A00983	CHAR 10/22/01	10/22/03
X	Quasi-Peak Adapter (Blue)	HP	85650A	2811A01279	CHAR 10/22/01	10/22/03
X	Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
	Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
	Biconnical Antenna	Eaton	94455-1	1057	CHAR 3/15/00	3/15/02
	BiconiLog Antenna	EMCO	3143	9409-1043		
X	Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
	Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
	Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CHAR 10/16/01	10/16/03
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 11/24/00	11/24/03
	Double-Ridged Horn Antenna	Electro-Metrics	RGA -180	2319	CAL 12/19/01	12/19/03
	Horn Antenna	Electro-Metrics	EM-6961	6246	CAL 3/21/01	3/21/03
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

Page 38 of 40

	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
	Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/16/01	3/16/03
	Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	5/25/01
	Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CAL 12/12/01	12/12/03
	Oscilloscope	Tektronix	2230	300572	CHAR 2/1/01	2/1/03
X	Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
	AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
	AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
	AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
X	Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
	Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/04
	Digital Multimeter	HP	E2377A	2927J05849	CHAR 1/8/02	1/8/04
	Multimeter	Fluke	FLUKE-77-3	79510405	CAL 9/26/01	9/26/03
	Peak Power Meter	HP	8900C	2131A00545	CHAR 1/26/01	1/26/03
	Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02	1/16/04
	Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/04
X	Temp/Humidity gauge	EXTech	44577F	E000901	CHAR 1/22/02	1/22/04
	Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/03
	Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 1/26/01	1/26/03
	Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	11/22/02
	Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 5/12/02	5/12/04

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc

	Signal Generator	HP	8640B	2308A21464	CAL 11/15/01	11/15/03
	Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
	Near Field Probe	HP	HP11940A	2650A02748	CHAR 2/1/01	2/1/03
	BandReject Filter	Lorch Microwave	5BR4-2400/ 60-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	6BR6-2442/ 300-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	5BR4-10525/ 900-S	Z1	CHAR 3/2/01	3/2/03
	High Pas Filter	Microlab	HA-10N		CHAR 10/4/01	10/4/03
	Audio Oscillator	HP	653A	832-00260	CHAR 3/1/01	3/1/03
	Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/03
	Frequency Counter	HP	5385A	3242A07460	CHAR 12/11/01	12/11/03
	Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
	Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/03
	Egg Timer	Unk			CHAR 8/31/01	8/31/03
	Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
	Measuring Tape, 7.5M	Kraftixx	7.5M PROFI		2/1/02	2/1/04
	Coaxial Cable #51	Insulated Wire Inc.	NPS 2251-2880	Timco #51	CHAR 1/23/02	1/23/04
	Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
	Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
	Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA70201BD

REPORT #: T:\M\MidlandRadio_MMA\924ut2924UT2TestReport.doc