

TEST REPORT

Applicant Name: Shenzhen Tuozhu Technology Co., Ltd.
Address: 903, West Zone, Hengchang Science and Technology Building, No.2228 Linhai Avenue, Nanshan Street, Qianhai Shengang Cooperation Zone, Shenzhen, China
Report Number: 2601P11316E-RF
FCC ID: 2A6J8-PF005L
IC: 28436-PF005L

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;
RSS-247 ISSUE 4, July 24, 2025

Sample Description

Product Type: A2L
Model No.: PF005-L
Multiple Model(s) No.: N/A
Trade Mark: bambulab
Date Received: 2026-01-16
Issue Date: 2026-05-15

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Wills Yu

Wills Yu
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked * is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
REQUIREMENTS AND TEST PROCEDURES	12
AC LINE CONDUCTED EMISSIONS	12
SPURIOUS EMISSIONS	15
99% OCCUPIED BANDWIDTH & 6 dB EMISSION BANDWIDTH	18
MAXIMUM CONDUCTED OUTPUT POWER	21
POWER SPECTRAL DENSITY	22
100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	23
CONDUCTED SPURIOUS EMISSION.....	24
DUTY CYCLE.....	25
ANTENNA REQUIREMENT	26
TEST DATA AND RESULTS	28
AC LINE CONDUCTED EMISSIONS	28
SPURIOUS EMISSIONS	41
6dB EMISSION BANDWIDTH.....	126
99% OCCUPIED BANDWIDTH	129
MAXIMUM CONDUCTED OUTPUT POWER	132
POWER SPECTRAL DENSITY	133
100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	136
DUTY CYCLE.....	139
CONDUCTED SPURIOUS EMISSION.....	141
RF EXPOSURE EVALUATION	144
EUT PHOTOGRAPHS	146
TEST SETUP PHOTOGRAPHS	147

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601P11316E-RF	Original Report	2026-05-15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	PF005-L
FVIN	01.00.00.00
Frequency Range	802.11b/g/n20: 2412~2472MHz 802.11n40: 2422~2462MHz
Mode	802.11b/g/n20/n40
Maximum Conducted Output Peak Power	21.34dBm
Modulation Technique	DSSS, OFDM
Antenna Specification[#]	3.6dBi (provided by the applicant)
Voltage Range	AC 100-120V, 50/60Hz
Sample serial number	3G8T-4 for AC Line Conducted Emissions and Radiated Emissions Test 3G8T-5 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Note: The equipment is equipped with 6 types of AC-to-DC power supply modules, the details are as follows:

Manufacturer	Model
MOSO	T30-T6250J240-150B0
MEGMEET	MPT150-24V-TZ-B
	MPT100-24V-TZ-B
CHUANGLIAN	A-150FGZ-24-C0
	A-100FGC-24
HuntKey	HKI100-240ND

Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 4, July 24, 2025 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024[▼], RSS-Gen and RSS-247.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		52.29kHz(k=1.96, 95% level of confidence)
RF output power, conducted		1.57dB(k=1.96, 95% level of confidence)
Power Spectral Density		2.09dB(k=1.96, 95% level of confidence)
Conducted Spurious Emission		2.48dB(k=1.96, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.46dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.66dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Horizontal)	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Vertical)	6.28dB(k=2, 95% level of confidence)
	1GHz - 6GHz	6.18dB(k=2, 95% level of confidence)
	6GHz - 18GHz	6.62dB(k=2, 95% level of confidence)
	18GHz - 40GHz	6.66dB(k=2, 95% level of confidence)
Temperature		$\pm 0.4^{\circ}\text{C}$
Humidity		$\pm 2\%$
Supply voltages		DC $\pm 0.4\%$; AC $\pm 1\%$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 7 and 13.

802.11n-HT40 mode was tested with Channel 3, 7 and 11.

EUT Exercise Software

Exercise Software [#]		EspRFTestTool_v4.7_Manual.exe		
Mode	Data rate	Power Level [#]		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	9	9	9
802.11g	6Mbps	11	11	11
802.11n20	MCS0	7	7	7
802.11n40	MCS0	4	4	4

Note: The worst-case data rates are determined to be as above for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Shenzhen Tuozhu Technology Co.,Ltd.	AMS lite	SA005	Unknown
Unknown	Resistance	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Un-detachable AC Cable	1.2	Socket	LISN/AC Mains
Unshielded Detachable AC Cable	1.5	EUT	LISN/Socket
Unshielded Detachable 4Pin cable	1.0	EUT	AMS lite
Shielded Detachable 6Pin cable	0.5	EUT	Resistance

Block Diagram of Test Setup


For AC Line Conducted Emissions:

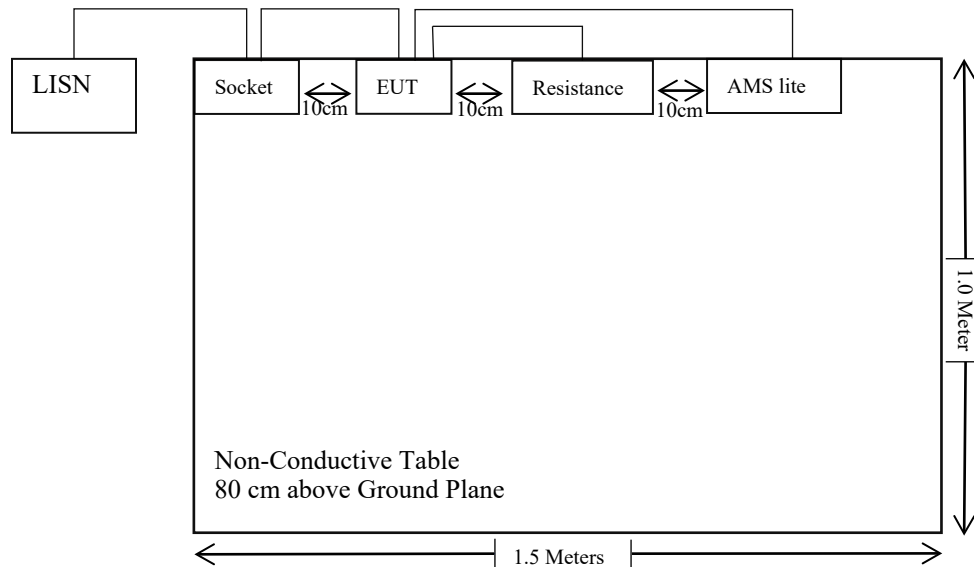

For Radiated Emissions below 1GHz:

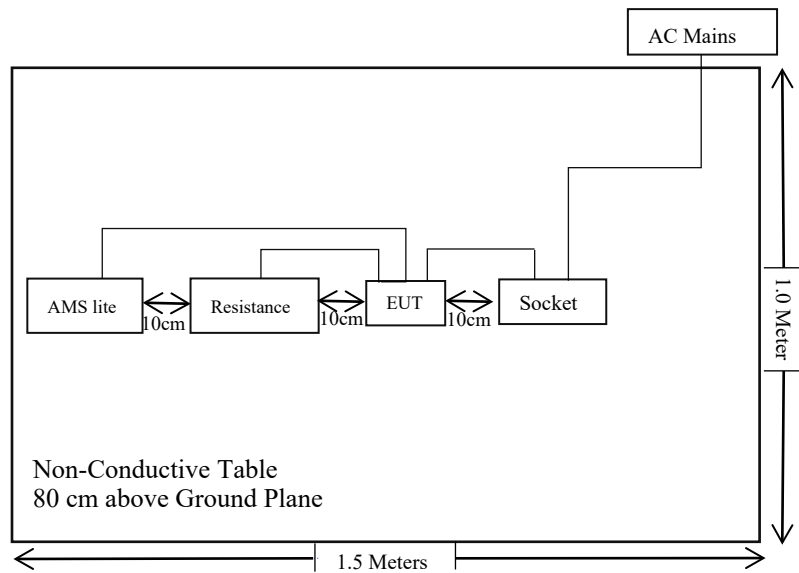

For Radiated Emissions above 1GHz:

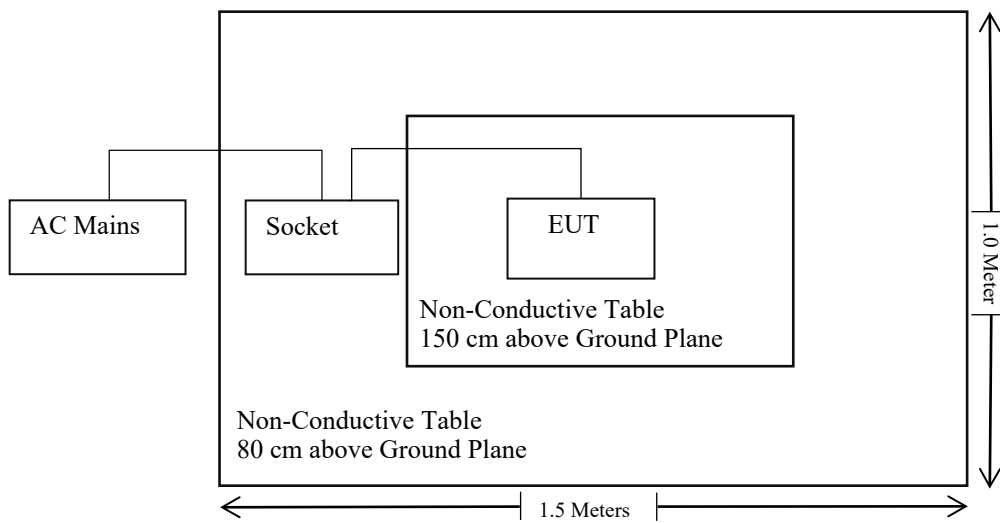

SUMMARY OF TEST RESULTS

Test Rules	Test Rules	Description of Test	Result
FCC §1.1307 & §2.1091	/	MPE-Based Exemption	Compliant
/	RSS-102 § 6.6	Field reference level exposure exemption limits	Compliant
FCC §15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207 (a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	RSS-GEN § 8.10 & RSS-247 §6.6	Spurious Emissions	Compliant
FCC §15.247 (a)(2)	RSS- Gen§6.7 RSS-247 §6.3.1(a)	99% Occupied Bandwidth & 6 dB Emission Bandwidth	Compliant
FCC §15.247(b)(3)	RSS-247 §6.3.2	Maximum Conducted Output Power	Compliant
FCC §15.247(e)	RSS-247 §6.3.1(b)	Power Spectral Density	Compliant
FCC §15.247(d)	RSS-247 §6.6	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(d)	RSS-247 §6.6	Conducted Spurious Emission	Compliant
C63.10 §11.6	C63.10 §11.6	Duty Cycle	/

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Radiated Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Chamber A Cable	Cable A3	Cable A3	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A4	Cable A4	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2025/08/12	2026/08/11
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2025/08/12	2026/08/11
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/09/08	2026/09/07
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Unknown	Chamber B Cable	Cable B4	Cable B4	2025/09/17	2026/09/16
Unknown	Chamber B Cable	Cable B5	Cable B5	2025/09/17	2026/09/16
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
TDK	Chamber	Chamber B	1#	2023/07/14	2026/07/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
ANRITSU	Microwave peak power sensor	MA24418A	12622	2025/09/01	2026/08/31
Unknown	10dB Attenuator	Unknown	F-03-EM190	2025/06/26	2026/06/25
Unknown	RF Cable	Cable RF3	Cable RF3	2025/09/17	2026/09/16
JD	JD Auto Test software	NA	1.0.0.3769	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC § 15.207 (a) & RSS-GEN §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for Compliant with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine Compliant with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine Compliant with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

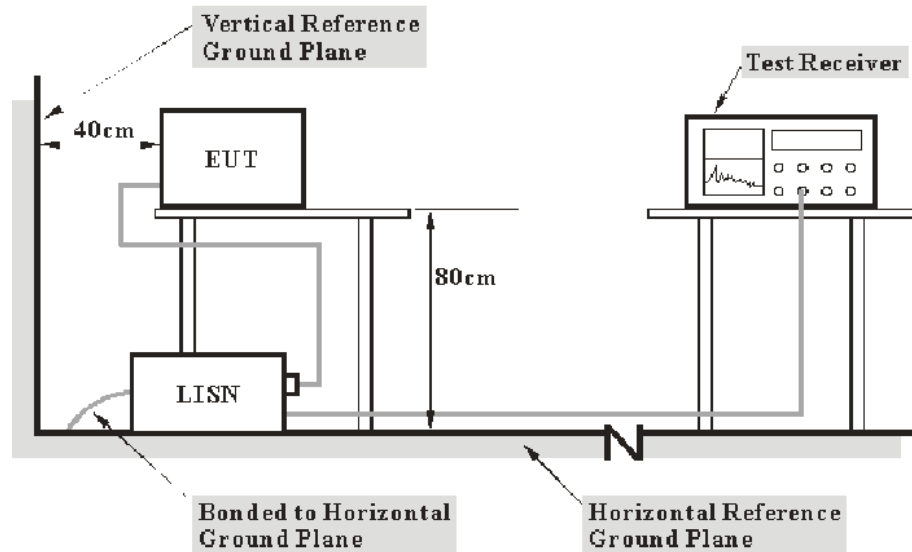

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{level} - \text{Limit} \\ \text{Level} &= \text{reading level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Spurious Emissions

Applicable Standard


FCC §15.247 (d); §15.209; §15.205; RSS-247 §6.6, RSS-GEN §8.10


EUT Setup

9 kHz-30MHz:

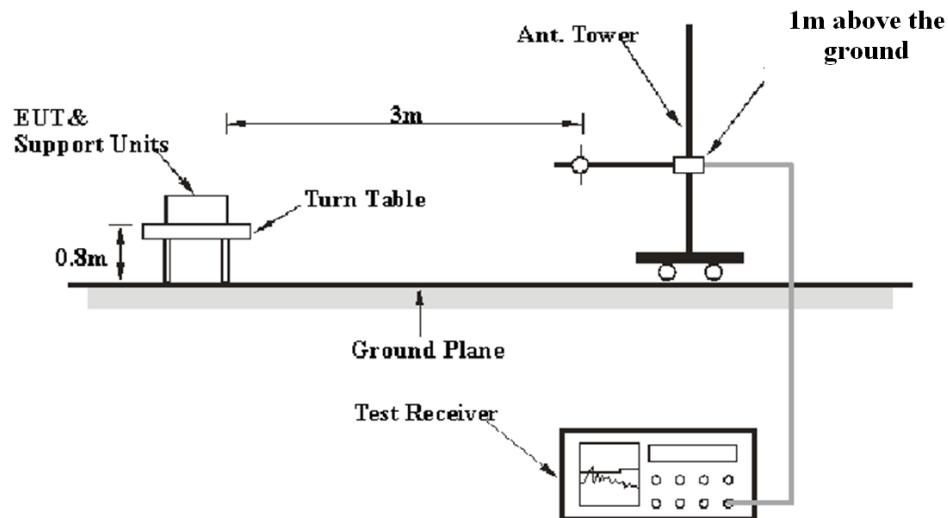

30MHz-1GHz:

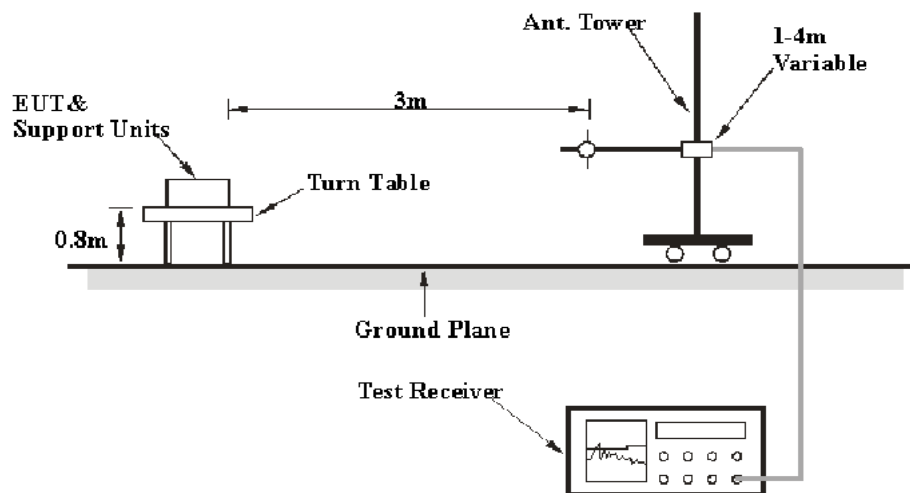

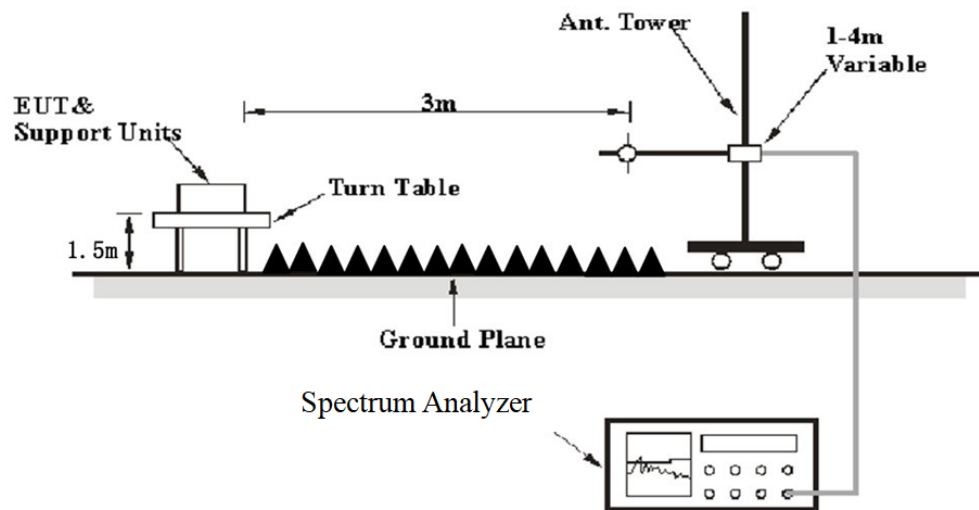Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2020 & RSS-Gen. The specification used was the FCC 15.205, FCC 15.209, FCC 15.247, RSS-Gen and RSS-247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak

1-25GHz:
Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	>1/Ton, not less than 1kHz	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	$\geq 1/\text{Ton}$	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

99% Occupied Bandwidth & 6 dB Emission Bandwidth

Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 §6.3.1(a)

The minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.8.1 & Clause 6.9.3


The steps for the first option are as follows:

- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

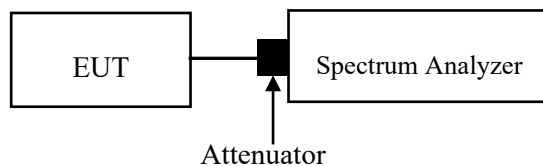

Maximum Conducted Output Power

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247§6.3.2 For DTS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W, and the e.i.r.p. shall not exceed 4 W, except as provided in section 6.5 a) and b).

Test Procedure

Test method: ANSI C63.10-2020 clause 11.9.1.2 for peak power method or clause 11.9.2.3.2 for average power method.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

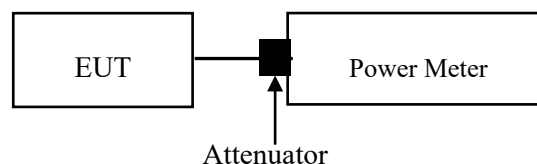

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Power Spectral Density

Applicable Standard

According to FCC §15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 §6.3.1(b):


The transmitter power spectral density conducted from the transmitter to the antenna(s) shall not be greater than 8 dBm/3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 6.3.2. The power spectral density shall be determined using the same method as is used to determine the maximum conducted output power.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span >1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = No faster than coupled (auto) time.
- g) Trace mode = max-hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

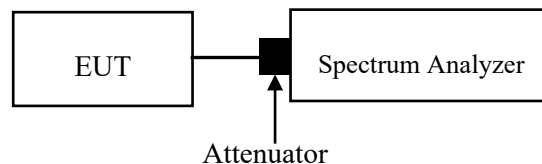

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

100 kHz Bandwidth of Frequency Band Edge

Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 § 6.6,

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device, or hybrid system is operating,, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power– based on either an RF conducted or a radiated measurement– provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 6.3.2, the attenuation required shall be 30 dB instead of 20dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.11.3


Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

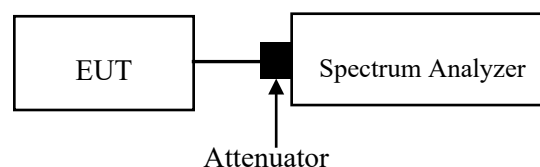

Conducted Spurious Emission

Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 § 6.6,

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device, or hybrid system is operating,, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power– based on either an RF conducted or a radiated measurement– provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 6.3.2, the attenuation required shall be 30 dB instead of 20dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.11.3


Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

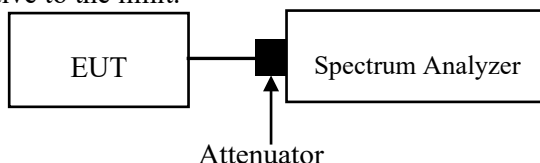

Note : The worst cable loss among the test frequency range was added into plots.


Duty Cycle

Test Procedure

According to ANSI C63.10-2020 Section 11.6

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

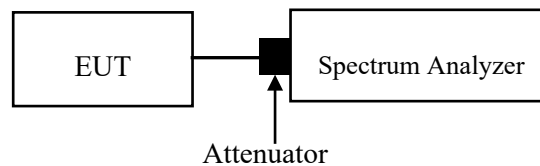

ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the Compliant of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna gain[#] is 3.6dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain [#]	Impedance	Frequency Range
PCB	3.6dBi	50Ω	2.4~2.5GHz

Result: Compliant

TEST DATA AND RESULTS


AC Line Conducted Emissions

Environmental Conditions

Temperature (°C)	21.1~25.4	Relative Humidity (%)	39~68
ATM Pressure (kPa)	100~102	Test engineer	Macy.Shi
Test date	2026.01.23~2026.3.23		
EUT operation mode	Transmitting (Maximum output power mode, 802.11b 2412MHz)		

MOSO (T30-T6250J240-150B0)

AC120V 60 Hz, Line

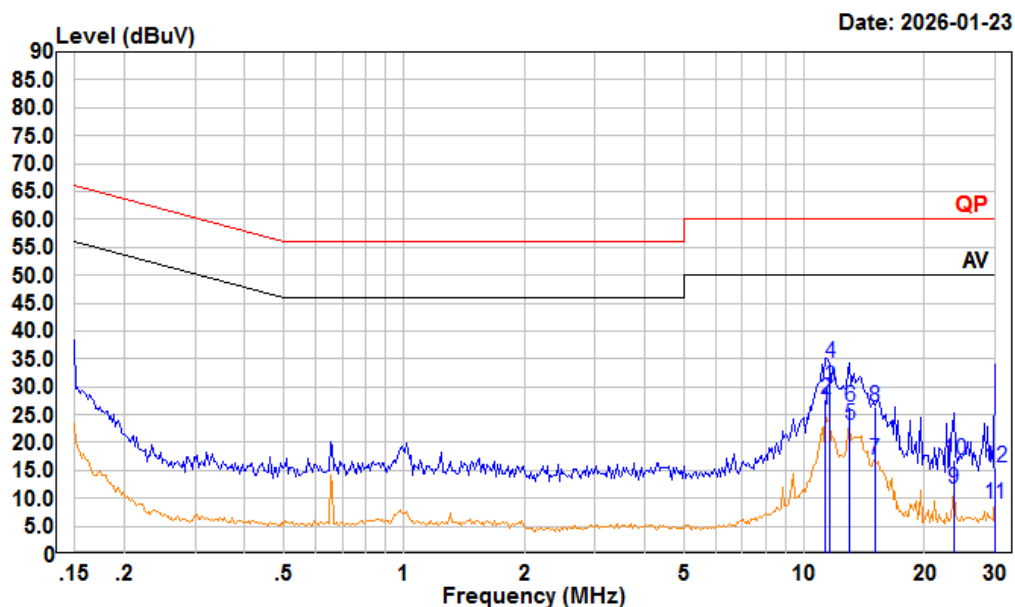

Condition: Line


Project : 2601P11316E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	11.325	5.63	25.87	9.90	10.34	50.00	-24.13	Average
2	11.325	7.60	27.84	9.90	10.34	60.00	-32.16	QP
3	11.594	9.61	29.86	9.90	10.35	50.00	-20.14	Average
4	11.594	14.15	34.40	9.90	10.35	60.00	-25.60	QP
5	13.016	2.75	23.01	9.90	10.36	50.00	-26.99	Average
6	13.016	6.10	26.36	9.90	10.36	60.00	-33.64	QP
7	15.000	-3.35	16.93	9.90	10.38	50.00	-33.07	Average
8	15.000	6.11	26.39	9.90	10.38	60.00	-33.61	QP
9	23.633	-8.56	11.81	9.90	10.47	50.00	-38.19	Average
10	23.633	-3.60	16.77	9.90	10.47	60.00	-43.23	QP
11	29.987	-11.49	8.95	9.90	10.54	50.00	-41.05	Average
12	29.987	-5.03	15.41	9.90	10.54	60.00	-44.59	QP

AC120V 60 Hz, Neutral

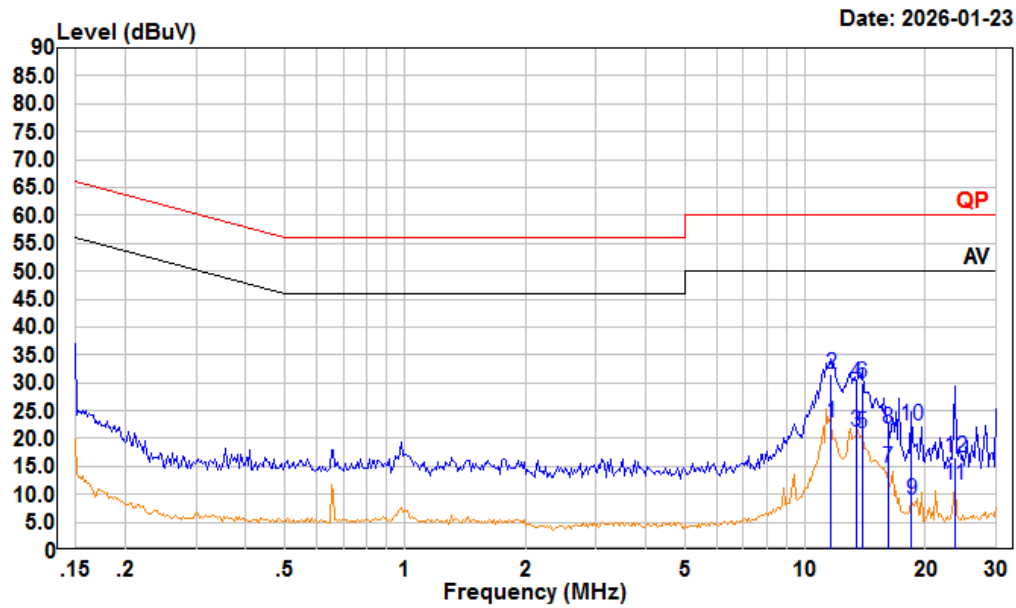

Condition: neutral

Project : 2601P11316E-RF


tester : Macy.shi Note: Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	11.589	2.69	22.74	9.70	10.35	50.00	-27.26	Average
2	11.589	11.44	31.49	9.70	10.35	60.00	-28.51	QP
3	13.407	1.07	21.13	9.70	10.36	50.00	-28.87	Average
4	13.407	9.88	29.94	9.70	10.36	60.00	-30.06	QP
5	13.864	0.98	21.05	9.70	10.37	50.00	-28.95	Average
6	13.864	9.80	29.87	9.70	10.37	60.00	-30.13	QP
7	16.139	-5.50	14.59	9.70	10.39	50.00	-35.41	Average
8	16.139	1.68	21.77	9.70	10.39	60.00	-38.23	QP
9	18.432	-11.17	8.94	9.70	10.41	50.00	-41.06	Average
10	18.432	2.20	22.31	9.70	10.41	60.00	-37.69	QP
11	23.633	-8.50	11.67	9.70	10.47	50.00	-38.33	Average
12	23.633	-3.60	16.57	9.70	10.47	60.00	-43.43	QP

CHUANGLIAN (A-150FGZ-24-C0)

AC120V 60 Hz, Line

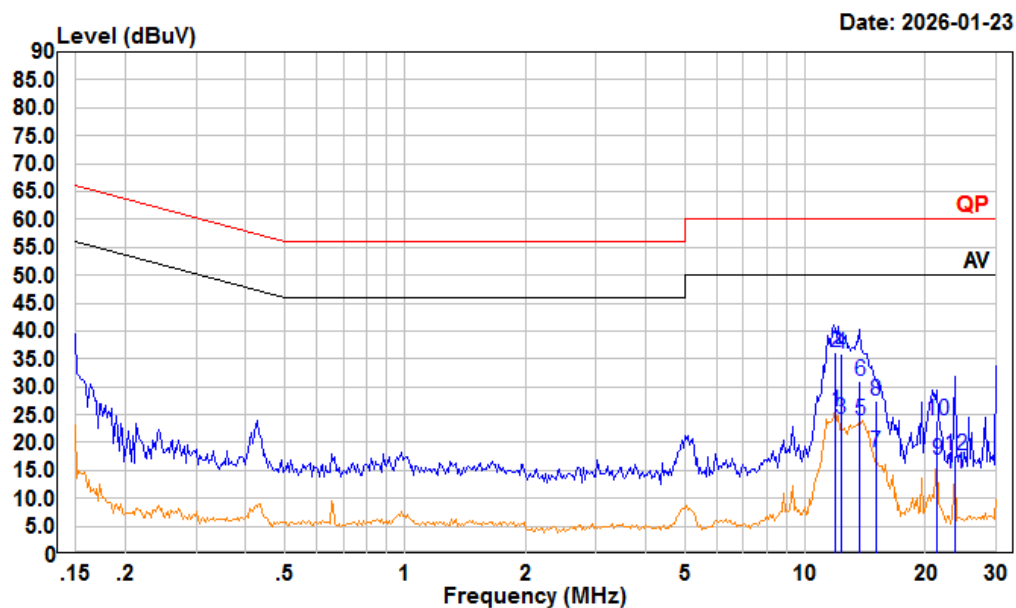

Condition: Line


Project : 2601P11316E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	11.949	5.28	25.53	9.90	10.35	50.00	-24.47	Average
2	11.949	16.01	36.26	9.90	10.35	60.00	-23.74	QP
3	12.277	3.83	24.08	9.90	10.35	50.00	-25.92	Average
4	12.277	15.78	36.03	9.90	10.35	60.00	-23.97	QP
5	13.679	3.75	24.02	9.90	10.37	50.00	-25.98	Average
6	13.679	10.70	30.97	9.90	10.37	60.00	-29.03	QP
7	15.007	-2.14	18.14	9.90	10.38	50.00	-31.86	Average
8	15.007	7.33	27.61	9.90	10.38	60.00	-32.39	QP
9	21.396	-3.59	16.76	9.90	10.45	50.00	-33.24	Average
10	21.396	3.70	24.05	9.90	10.45	60.00	-35.95	QP
11	23.633	-5.88	14.49	9.90	10.47	50.00	-35.51	Average
12	23.633	-2.80	17.57	9.90	10.47	60.00	-42.43	QP

AC120V 60 Hz, Neutral

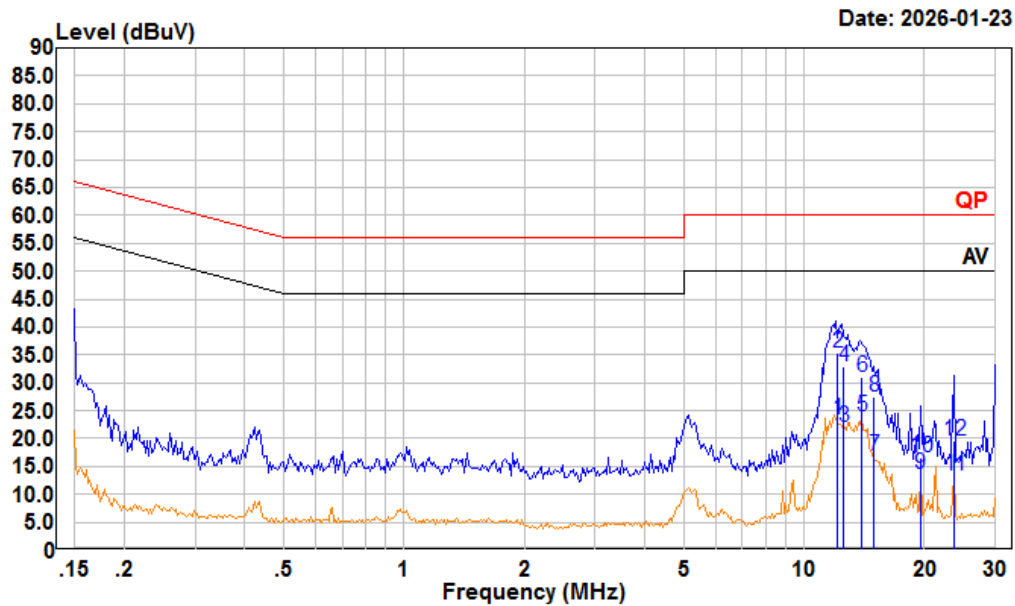

Condition: neutral

Project : 2601P11316E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	12.154	3.32	23.37	9.70	10.35	50.00	-26.63	Average
2	12.154	15.33	35.38	9.70	10.35	60.00	-24.62	QP
3	12.552	2.00	22.06	9.70	10.36	50.00	-27.94	Average
4	12.552	12.77	32.83	9.70	10.36	60.00	-27.17	QP
5	13.954	3.94	24.01	9.70	10.37	50.00	-25.99	Average
6	13.954	11.00	31.07	9.70	10.37	60.00	-28.93	QP
7	14.971	-3.31	16.77	9.70	10.38	50.00	-33.23	Average
8	14.971	7.48	27.56	9.70	10.38	60.00	-32.44	QP
9	19.565	-6.58	13.55	9.70	10.43	50.00	-36.45	Average
10	19.565	-3.60	16.53	9.70	10.43	60.00	-43.47	QP
11	23.735	-6.74	13.43	9.70	10.47	50.00	-36.57	Average
12	23.735	-0.60	19.57	9.70	10.47	60.00	-40.43	QP

CHUANGLIAN (A-100FGC-24)

AC120V 60 Hz, Line

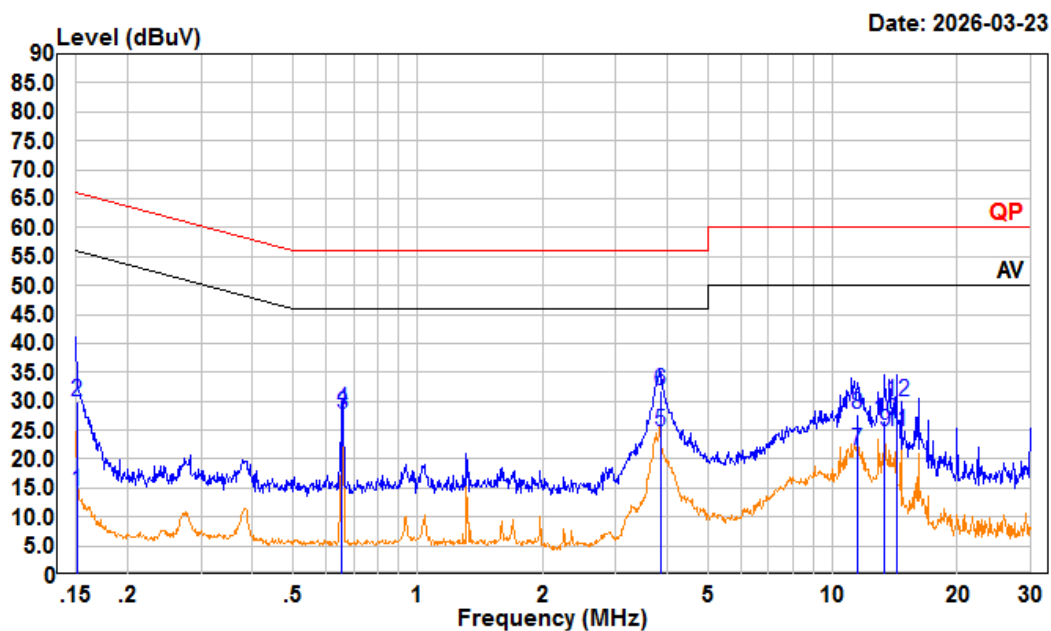

Condition: Line


Project : 2601P11316E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.151	-5.38	14.34	9.70	10.02	55.95	-41.61	Average
2	0.151	10.17	29.89	9.70	10.02	65.95	-36.06	QP
3	0.658	7.80	27.64	9.80	10.04	46.00	-18.36	Average
4	0.658	8.65	28.49	9.80	10.04	56.00	-27.51	QP
5	3.847	4.60	24.71	9.90	10.21	46.00	-21.29	Average
6	3.847	11.69	31.80	9.90	10.21	56.00	-24.20	QP
7	11.464	1.17	21.41	9.90	10.34	50.00	-28.59	Average
8	11.464	7.50	27.74	9.90	10.34	60.00	-32.26	QP
9	13.380	4.56	24.82	9.90	10.36	50.00	-25.18	Average
10	13.380	6.30	26.56	9.90	10.36	60.00	-33.44	QP
11	14.275	4.62	24.89	9.90	10.37	50.00	-25.11	Average
12	14.275	9.60	29.87	9.90	10.37	60.00	-30.13	QP

AC120V 60 Hz, Neutral

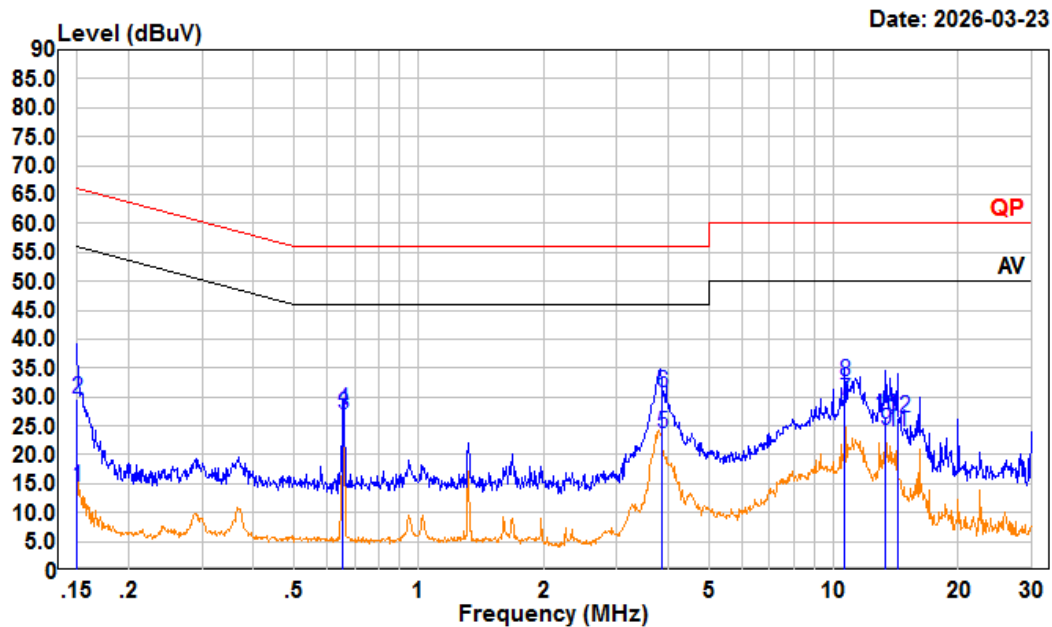

Condition: neutral

Project : 2601P11316E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.150	-5.26	14.36	9.60	10.02	56.00	-41.64	Average
2	0.150	10.07	29.69	9.60	10.02	66.00	-36.31	QP
3	0.658	7.29	26.93	9.60	10.04	46.00	-19.07	Average
4	0.658	8.13	27.77	9.60	10.04	56.00	-28.23	QP
5	3.859	3.82	23.63	9.60	10.21	46.00	-22.37	Average
6	3.859	11.05	30.86	9.60	10.21	56.00	-25.14	QP
7	10.638	9.35	29.39	9.70	10.34	50.00	-20.61	Average
8	10.638	12.60	32.64	9.70	10.34	60.00	-27.36	QP
9	13.380	4.22	24.28	9.70	10.36	50.00	-25.72	Average
10	13.380	6.70	26.76	9.70	10.36	60.00	-33.24	QP
11	14.275	3.82	23.89	9.70	10.37	50.00	-26.11	Average
12	14.275	6.30	26.37	9.70	10.37	60.00	-33.63	QP

MEGMEET (MPT150-24V-TZ-B)

AC120V 60 Hz, Line

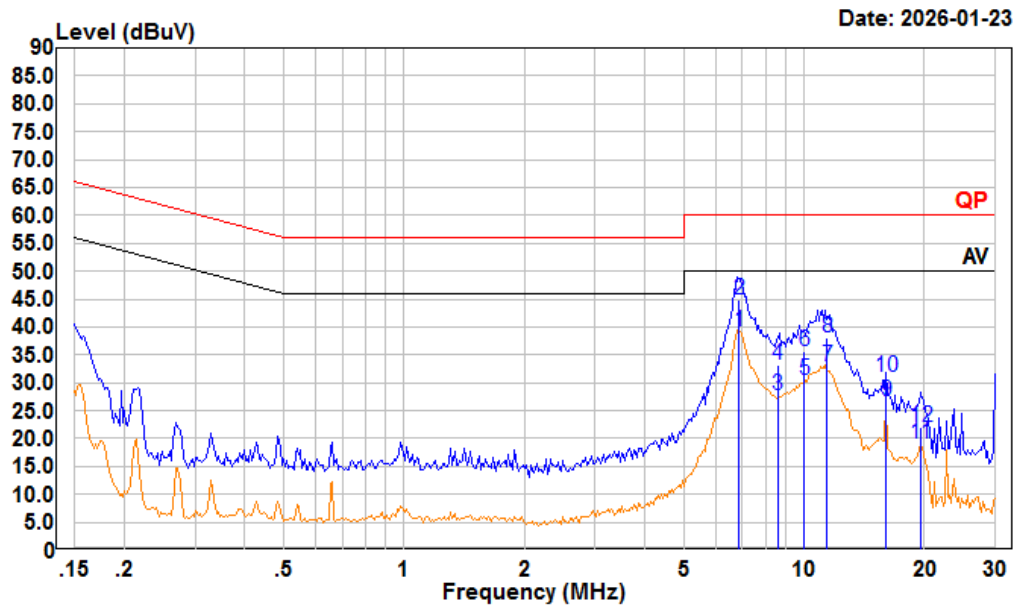

Condition: Line


Project : 2601P11316E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	6.870	18.98	39.16	9.90	10.28	50.00	-10.84	Average
2	6.870	24.68	44.86	9.90	10.28	60.00	-15.14	QP
3	8.584	7.53	27.74	9.90	10.31	50.00	-22.26	Average
4	8.584	13.09	33.30	9.90	10.31	60.00	-26.70	QP
5	10.016	10.11	30.34	9.90	10.33	50.00	-19.66	Average
6	10.016	15.41	35.64	9.90	10.33	60.00	-24.36	QP
7	11.429	12.68	32.92	9.90	10.34	50.00	-17.08	Average
8	11.429	17.75	37.99	9.90	10.34	60.00	-22.01	QP
9	16.038	6.34	26.63	9.90	10.39	50.00	-23.37	Average
10	16.038	10.60	30.89	9.90	10.39	60.00	-29.11	QP
11	19.565	-1.39	18.94	9.90	10.43	50.00	-31.06	Average
12	19.565	1.60	21.93	9.90	10.43	60.00	-38.07	QP

AC120V 60 Hz, Neutral

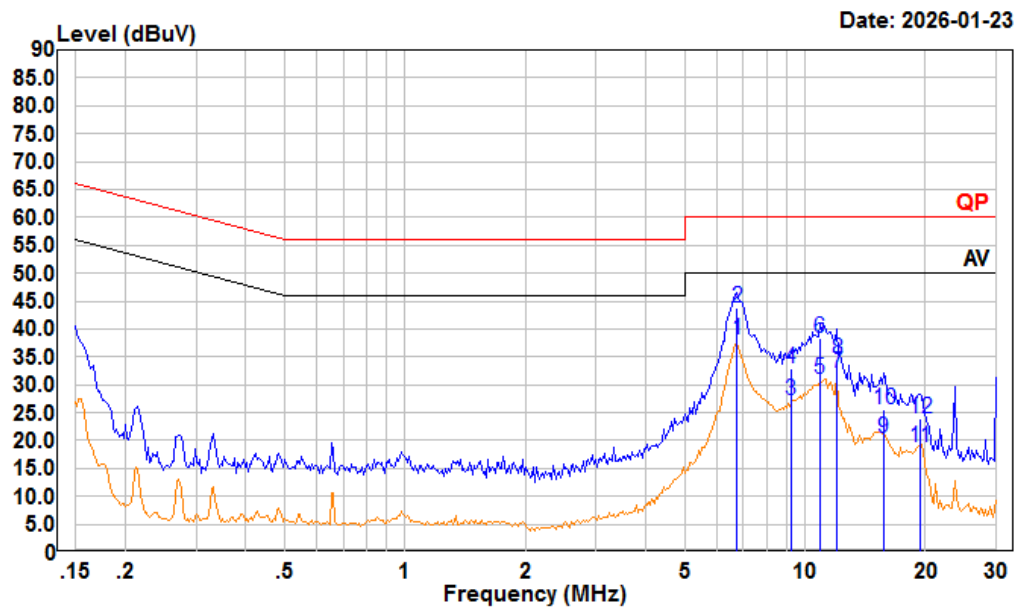

Condition: neutral

Project : 2601P11316E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	6.751	18.02	37.98	9.69	10.27	50.00	-12.02	Average
2	6.751	23.78	43.74	9.69	10.27	60.00	-16.26	QP
3	9.216	7.19	27.21	9.70	10.32	50.00	-22.79	Average
4	9.216	12.82	32.84	9.70	10.32	60.00	-27.16	QP
5	10.900	10.87	30.91	9.70	10.34	50.00	-19.09	Average
6	10.900	18.23	38.27	9.70	10.34	60.00	-21.73	QP
7	12.021	12.14	32.19	9.70	10.35	50.00	-17.81	Average
8	12.021	14.60	34.65	9.70	10.35	60.00	-25.35	QP
9	15.713	0.41	20.50	9.70	10.39	50.00	-29.50	Average
10	15.713	5.47	25.56	9.70	10.39	60.00	-34.44	QP
11	19.400	-1.27	18.85	9.70	10.42	50.00	-31.15	Average
12	19.400	3.72	23.84	9.70	10.42	60.00	-36.16	QP

MEGMEET (MPT100-24V-TZ-B)

AC120V 60 Hz, Line

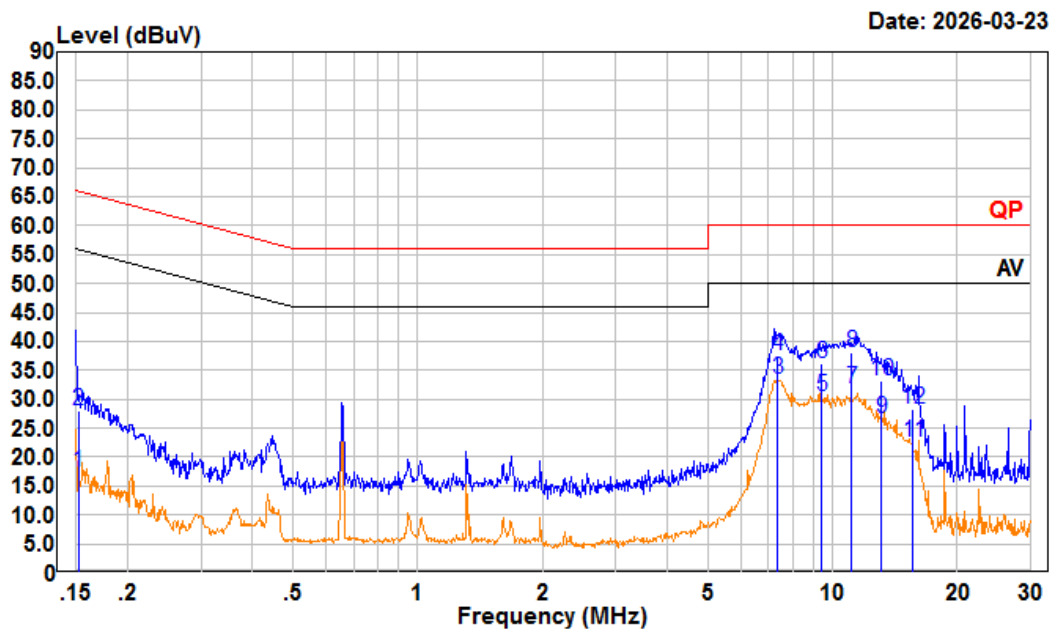

Condition: Line


Project : 2601P11316E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	-2.40	17.32	9.70	10.02	55.88	-38.56	Average
2	0.152	8.16	27.88	9.70	10.02	65.88	-38.00	QP
3	7.359	13.39	33.58	9.90	10.29	50.00	-16.42	Average
4	7.359	17.36	37.55	9.90	10.29	60.00	-22.45	QP
5	9.420	10.11	30.33	9.90	10.32	50.00	-19.67	Average
6	9.420	15.90	36.12	9.90	10.32	60.00	-23.88	QP
7	11.140	11.66	31.90	9.90	10.34	50.00	-18.10	Average
8	11.140	17.71	37.95	9.90	10.34	60.00	-22.05	QP
9	13.129	6.46	26.72	9.90	10.36	50.00	-23.28	Average
10	13.129	12.96	33.22	9.90	10.36	60.00	-26.78	QP
11	15.637	2.16	22.45	9.90	10.39	50.00	-27.55	Average
12	15.637	7.89	28.18	9.90	10.39	60.00	-31.82	QP

AC120V 60 Hz, Neutral

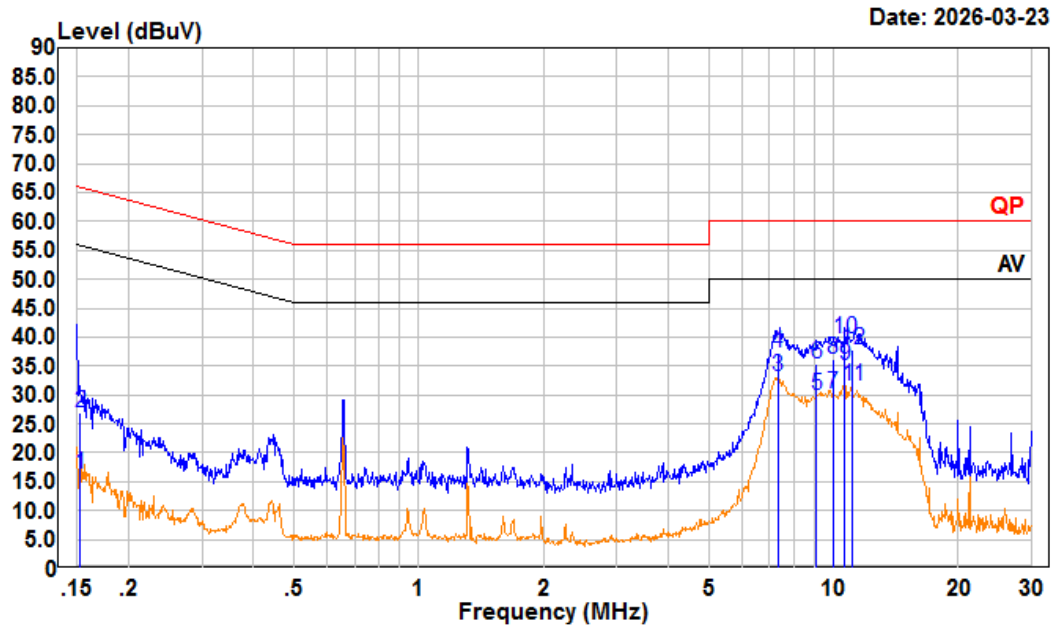

Condition: neutral

Project : 2601P11316E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	-3.23	16.39	9.60	10.02	55.86	-39.47	Average
2	0.152	7.37	26.99	9.60	10.02	65.86	-38.87	QP
3	7.346	13.27	33.26	9.70	10.29	50.00	-16.74	Average
4	7.346	17.15	37.14	9.70	10.29	60.00	-22.86	QP
5	9.111	9.86	29.88	9.70	10.32	50.00	-20.12	Average
6	9.111	15.23	35.25	9.70	10.32	60.00	-24.75	QP
7	9.984	10.20	30.23	9.70	10.33	50.00	-19.77	Average
8	9.984	16.28	36.31	9.70	10.33	60.00	-23.69	QP
9	10.659	15.04	35.08	9.70	10.34	50.00	-14.92	Average
10	10.659	19.67	39.71	9.70	10.34	60.00	-20.29	QP
11	11.129	11.48	31.52	9.70	10.34	50.00	-18.48	Average
12	11.129	17.76	37.80	9.70	10.34	60.00	-22.20	QP

HuntKey (HKI100-240ND)

AC120V 60 Hz, Line

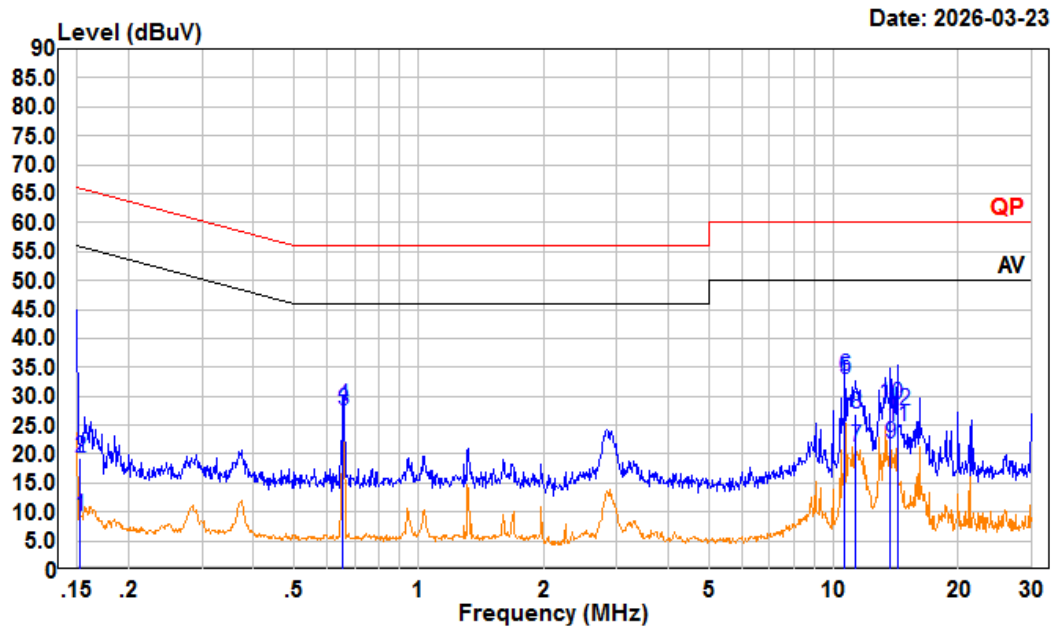

Condition: Line


Project : 2601P11316E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	-10.55	9.17	9.70	10.02	55.86	-46.69	Average
2	0.152	-0.40	19.32	9.70	10.02	65.86	-46.54	QP
3	0.657	7.76	27.60	9.80	10.04	46.00	-18.40	Average
4	0.657	8.53	28.37	9.80	10.04	56.00	-27.63	QP
5	10.638	12.72	32.96	9.90	10.34	50.00	-17.04	Average
6	10.638	13.30	33.54	9.90	10.34	60.00	-26.46	QP
7	11.294	0.99	21.23	9.90	10.34	50.00	-28.77	Average
8	11.294	6.60	26.84	9.90	10.34	60.00	-33.16	QP
9	13.717	1.61	21.88	9.90	10.37	50.00	-28.12	Average
10	13.717	8.30	28.57	9.90	10.37	60.00	-31.43	QP
11	14.275	4.61	24.88	9.90	10.37	50.00	-25.12	Average
12	14.275	7.20	27.47	9.90	10.37	60.00	-32.53	QP

AC120V 60 Hz, Neutral

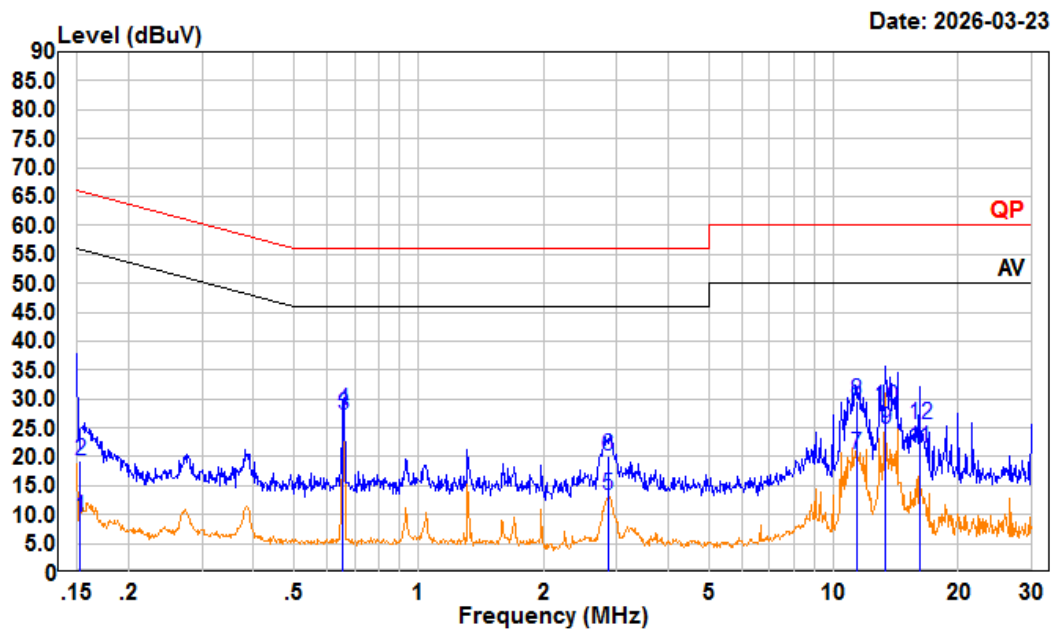

Condition: neutral

Project : 2601P11316E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.153	-9.98	9.64	9.60	10.02	55.84	-46.20	Average
2	0.153	-0.25	19.37	9.60	10.02	65.84	-46.47	QP
3	0.657	7.58	27.22	9.60	10.04	46.00	-18.78	Average
4	0.657	8.34	27.98	9.60	10.04	56.00	-28.02	QP
5	2.865	-6.54	13.26	9.60	10.20	46.00	-32.74	Average
6	2.865	0.38	20.18	9.60	10.20	56.00	-35.82	QP
7	11.350	0.31	20.35	9.70	10.34	50.00	-29.65	Average
8	11.350	9.60	29.64	9.70	10.34	60.00	-30.36	QP
9	13.380	4.78	24.84	9.70	10.36	50.00	-25.16	Average
10	13.380	8.60	28.66	9.70	10.36	60.00	-31.34	QP
11	16.089	1.39	21.48	9.70	10.39	50.00	-28.52	Average
12	16.089	5.60	25.69	9.70	10.39	60.00	-34.31	QP

Spurious Emissions


Environmental Conditions

Temperature (°C)	22.3~24.7	Relative Humidity (%)	48~56
ATM Pressure (kPa):	100.9~102.6	Test engineer:	Nico Wu & Wing K Ji
Test date:	2026.02.02~2026.03.23		
EUT operation mode:	Below 1GHz: Transmitting (Maximum output power mode, 802.11b 2412MHz) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 1GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. The spurious emission from 9 kHz-30MHz of IC RSS-GEN standard, the unit of final result on the test plots are dBμV/m, so the limit should be added by 51,5 dB from dBμA/m to dBμV/m. 4. For the radiated spurious emission above 1GHz, only the worst case (MOSO) was recorded.		

Below 1GHz:

MOSO (T30-T6250J240-150B0)


9kHz-150kHz

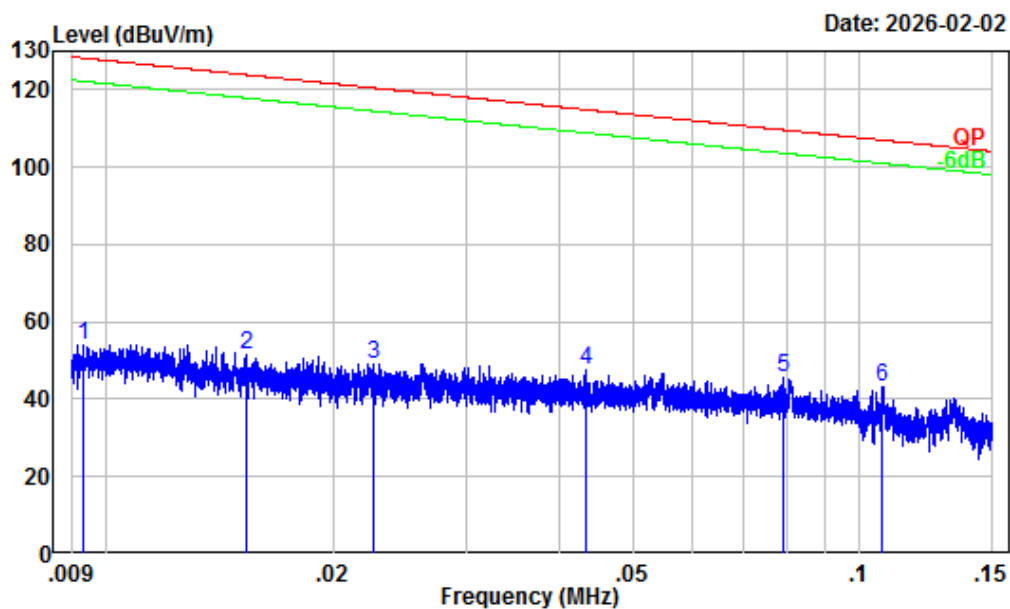

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.009	32.43	21.77	54.20	128.19	-73.99	Peak
2	0.015	31.28	20.06	51.34	123.87	-72.53	Peak
3	0.023	29.88	19.20	49.08	120.48	-71.40	Peak
4	0.043	27.09	20.29	47.38	114.86	-67.48	Peak
5	0.079	23.48	21.92	45.40	109.63	-64.23	Peak
6	0.107	21.57	21.74	43.31	106.99	-63.68	Peak


150kHz-30MH

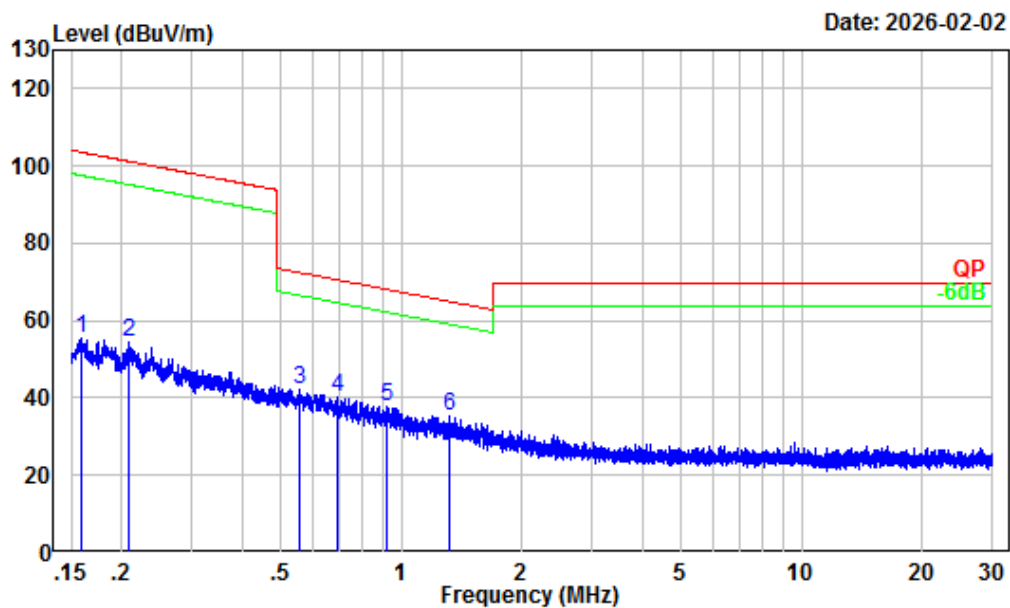

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.159	18.50	36.89	55.39	103.56	-48.17	Peak
2	0.208	15.62	38.60	54.22	101.23	-47.01	Peak
3	0.557	5.70	36.55	42.25	72.66	-30.41	Peak
4	0.690	4.06	35.94	40.00	70.77	-30.77	Peak
5	0.923	1.78	35.80	37.58	68.19	-30.61	Peak
6	1.323	0.30	34.90	35.20	64.99	-29.79	Peak


30MHz-1GHz_Horizontal

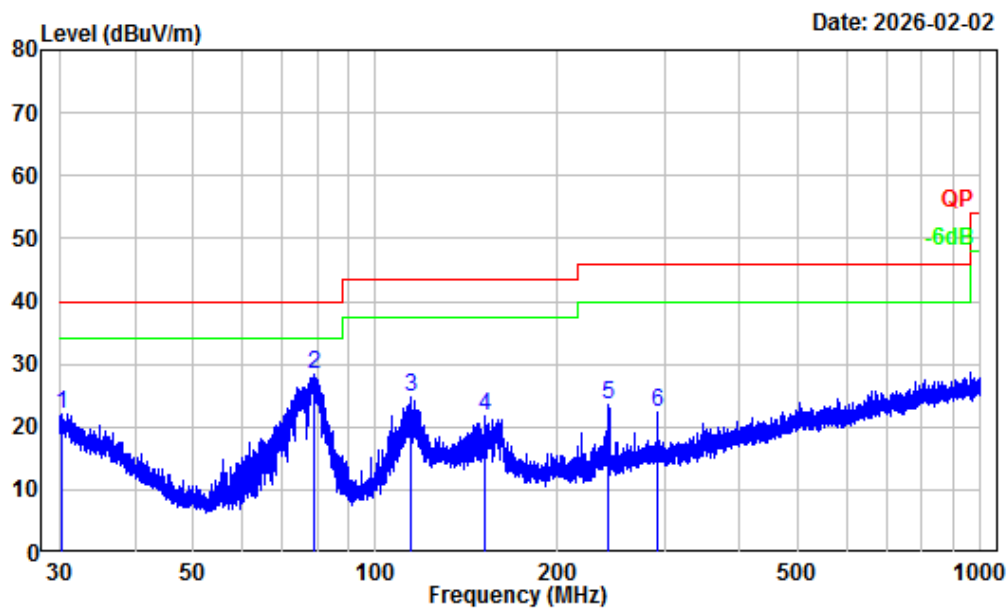

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.36	-6.14	28.14	22.00	40.00	-18.00	Peak
2	79.31	-17.90	46.24	28.34	40.00	-11.66	Peak
3	114.26	-12.28	37.15	24.87	43.50	-18.63	Peak
4	151.53	-12.50	34.10	21.60	43.50	-21.90	Peak
5	243.16	-13.25	36.80	23.55	46.00	-22.45	Peak
6	291.80	-11.21	33.68	22.47	46.00	-23.53	Peak

30MHz-1GHz_Vertical

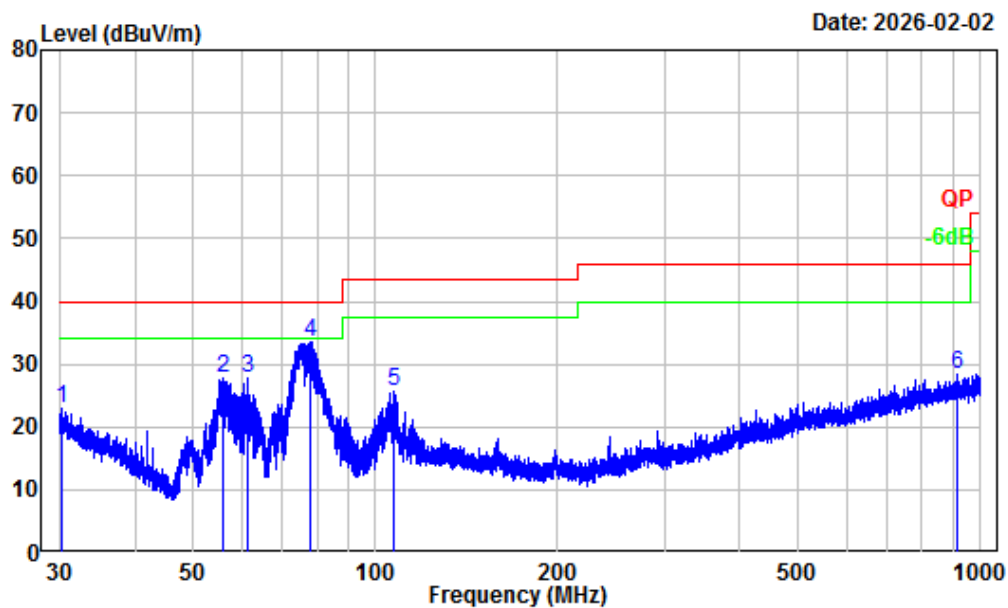


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.21	-6.07	29.00	22.93	40.00	-17.07	Peak
2	55.78	-18.32	45.99	27.67	40.00	-12.33	Peak
3	61.27	-18.11	45.94	27.83	40.00	-12.17	Peak
4	77.76	-17.82	51.40	33.58	40.00	-6.42	Peak
5	107.51	-13.71	39.32	25.61	43.50	-17.89	Peak
6	916.07	-1.13	29.61	28.48	46.00	-17.52	Peak

CHUANGLIAN (A-150FGZ-24-C0)


9kHz-150kHz

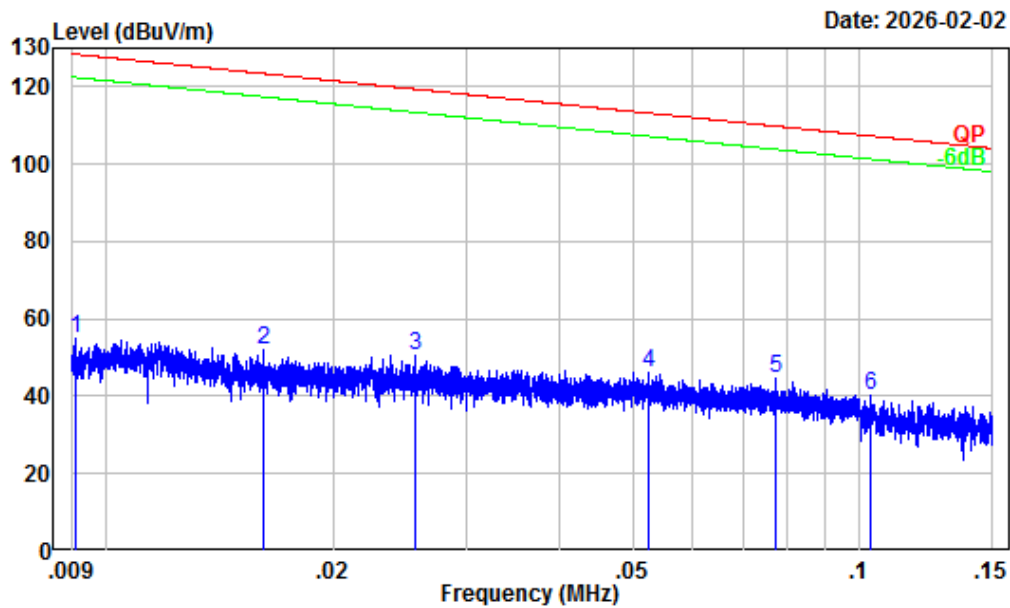

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.009	32.48	22.66	55.14	128.42	-73.28	Peak
2	0.016	31.12	20.91	52.03	123.41	-71.38	Peak
3	0.026	29.30	21.01	50.31	119.38	-69.07	Peak
4	0.053	26.14	20.17	46.31	113.19	-66.88	Peak
5	0.077	23.68	21.00	44.68	109.86	-65.18	Peak
6	0.103	21.80	18.46	40.26	107.32	-67.06	Peak


150kHz-30MHz

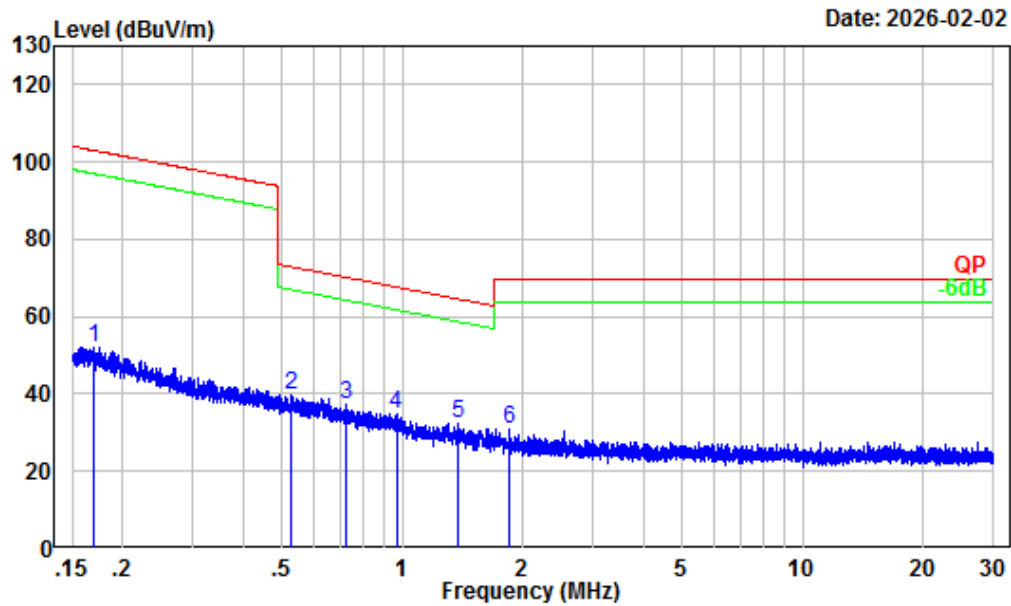

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.170	17.85	34.39	52.24	102.98	-50.74	Peak
2	0.527	6.06	33.46	39.52	73.15	-33.63	Peak
3	0.726	3.61	33.69	37.30	70.31	-33.01	Peak
4	0.967	1.45	33.47	34.92	67.77	-32.85	Peak
5	1.372	0.16	32.38	32.54	64.67	-32.13	Peak
6	1.856	-1.20	32.19	30.99	69.54	-38.55	Peak


30MHz-1GHz_Horizontal

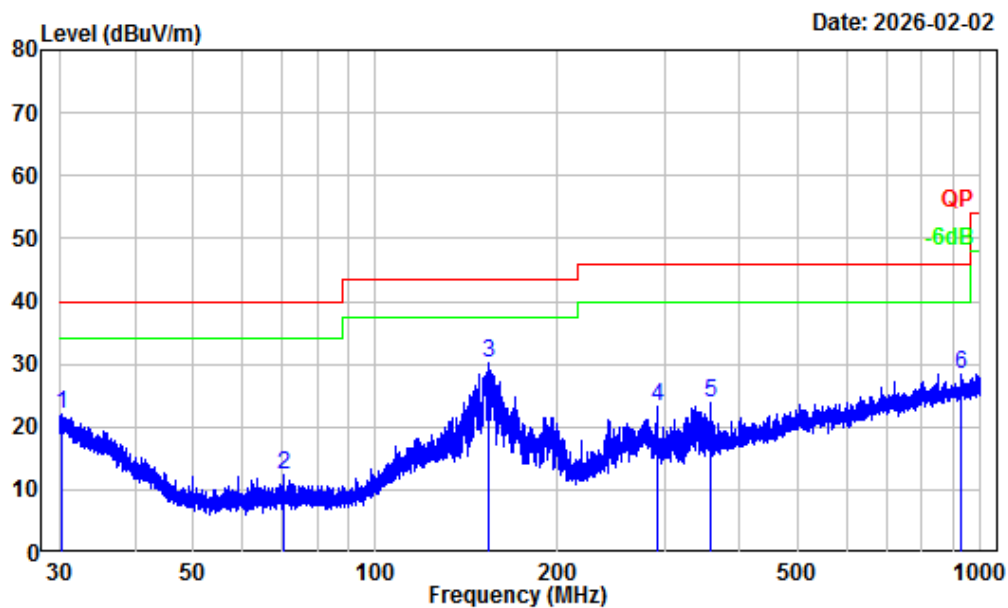

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	30.20	-6.06	28.13	22.07	40.00	-17.93	Peak
2	70.55	-17.87	30.11	12.24	40.00	-27.76	Peak
3	154.01	-12.55	42.85	30.30	43.50	-13.20	Peak
4	291.93	-11.21	34.38	23.17	46.00	-22.83	Peak
5	357.77	-9.94	33.83	23.89	46.00	-22.11	Peak
6	927.38	-1.09	29.61	28.52	46.00	-17.48	Peak

30MHz-1GHz_Vertical

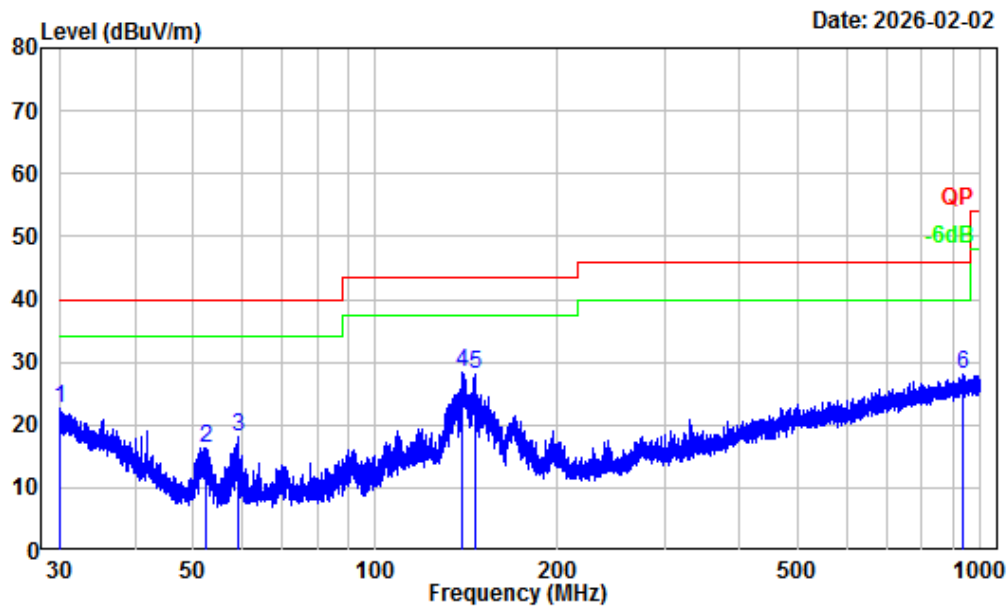


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	30.05	-5.99	28.59	22.60	40.00	-17.40	Peak
2	52.46	-18.26	34.70	16.44	40.00	-23.56	Peak
3	59.44	-18.18	36.41	18.23	40.00	-21.77	Peak
4	139.06	-11.80	40.06	28.26	43.50	-15.24	Peak
5	146.25	-12.27	40.48	28.21	43.50	-15.29	Peak
6	935.55	-1.05	29.01	27.96	46.00	-18.04	Peak

CHUANGLIAN (A-100FGC-24)


9kHz-150kHz

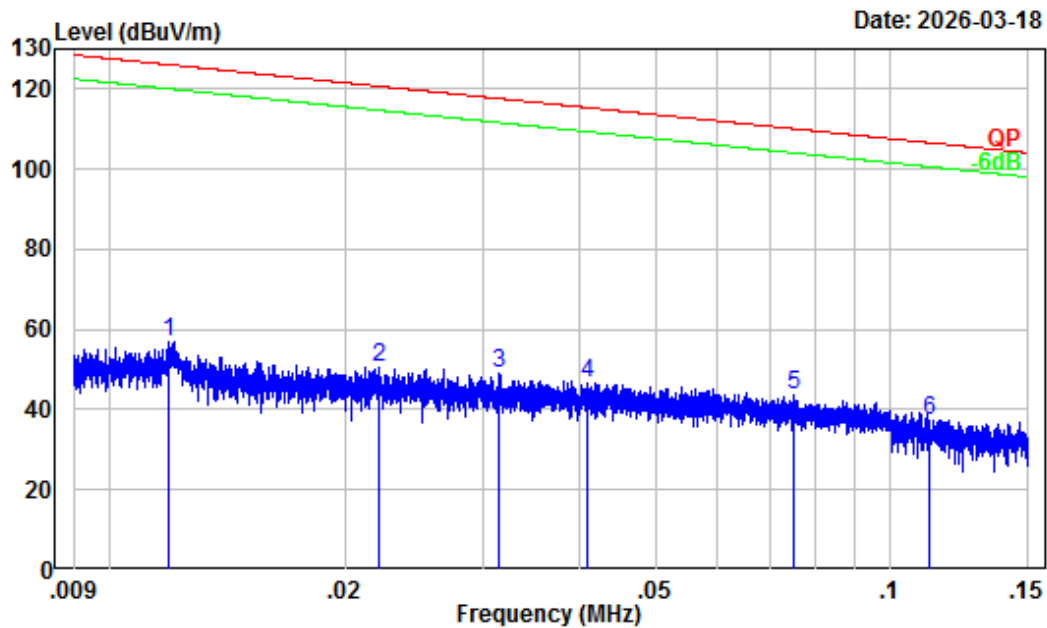

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	31.94	24.76	56.70	126.09	-69.39	Peak
2	0.022	30.00	20.56	50.56	120.72	-70.16	Peak
3	0.031	28.35	20.72	49.07	117.65	-68.58	Peak
4	0.041	27.36	19.48	46.84	115.38	-68.54	Peak
5	0.075	23.88	19.82	43.70	110.08	-66.38	Peak
6	0.112	21.29	16.16	37.45	106.62	-69.17	Peak


150kHz-30MHz

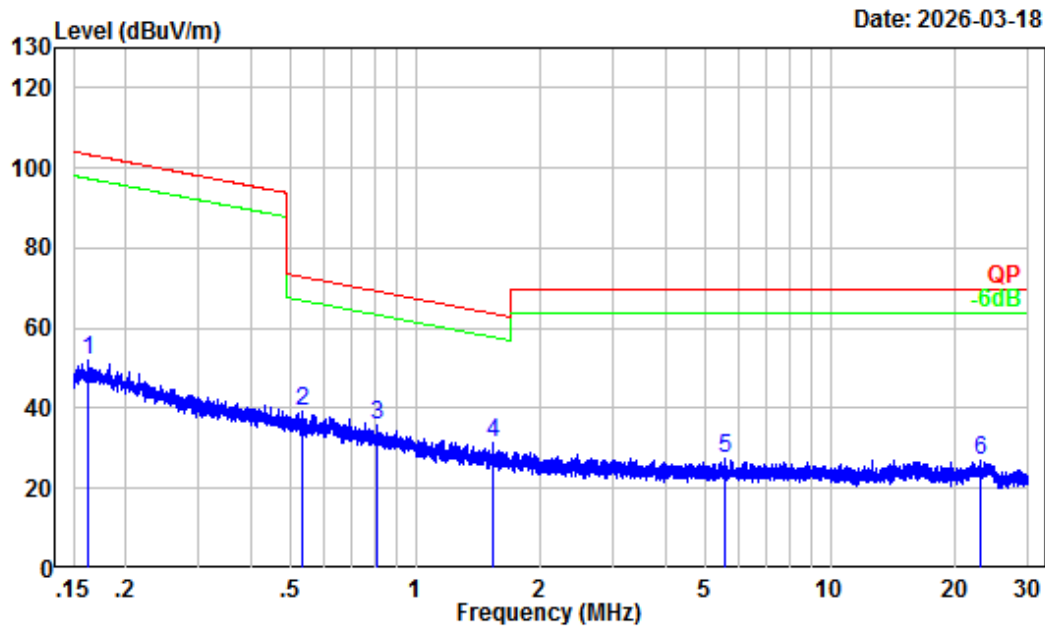

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.162	18.34	33.61	51.95	103.41	-51.46	Peak
2	0.532	6.01	33.09	39.10	73.07	-33.97	Peak
3	0.808	2.64	33.06	35.70	69.37	-33.67	Peak
4	1.544	-0.32	31.94	31.62	63.62	-32.00	Peak
5	5.583	-2.86	30.35	27.49	69.54	-42.05	Peak
6	22.927	-3.10	30.16	27.06	69.54	-42.48	Peak


30MHz-1GHz_Horizontal

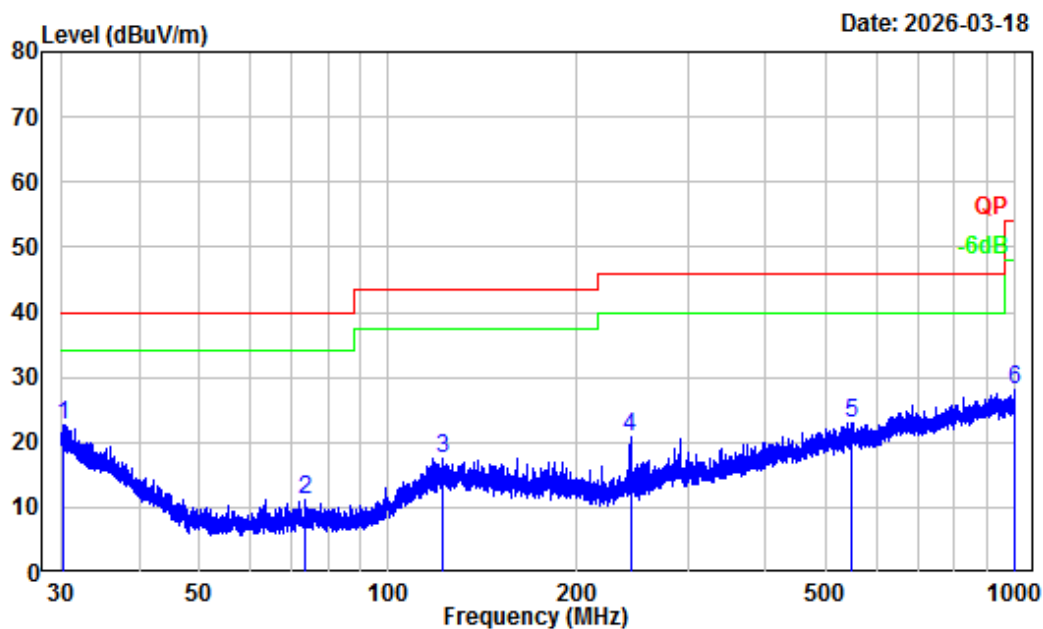

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.38	-6.06	28.72	22.66	40.00	-17.34	Peak
2	73.75	-17.97	29.08	11.11	40.00	-28.89	Peak
3	122.35	-11.59	29.16	17.57	43.50	-25.93	Peak
4	243.27	-13.66	34.49	20.83	46.00	-25.17	Peak
5	547.10	-6.21	29.20	22.99	46.00	-23.01	Peak
6	998.69	-0.91	28.92	28.01	54.00	-25.99	Peak

30MHz-1GHz_Vertical

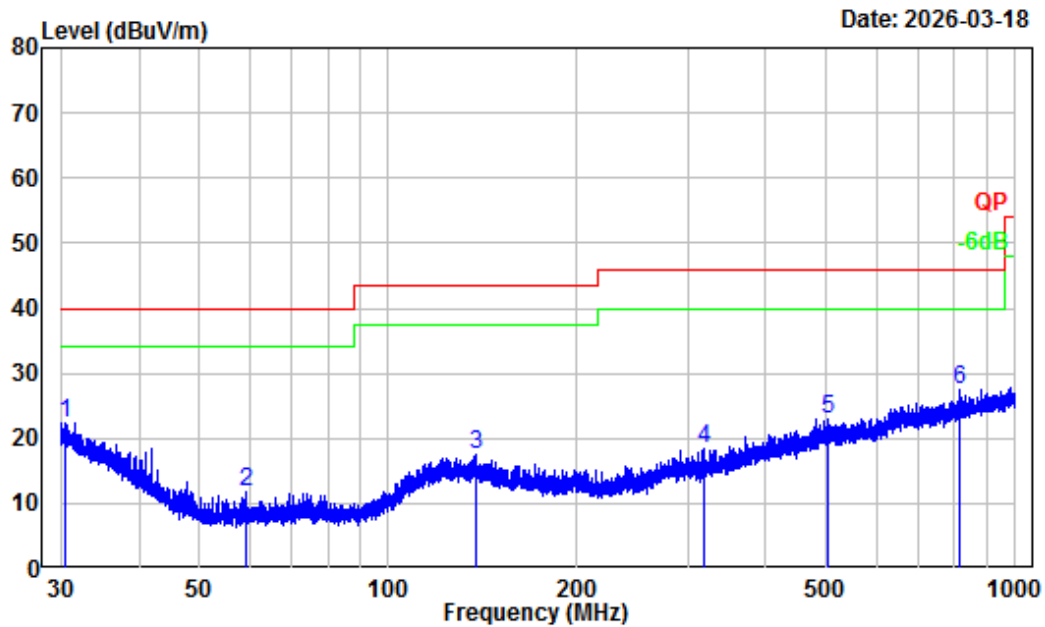


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.46	-6.10	28.47	22.37	40.00	-17.63	Peak
2	59.28	-18.28	30.16	11.88	40.00	-28.12	Peak
3	137.78	-12.03	29.54	17.51	43.50	-25.99	Peak
4	317.98	-11.25	29.66	18.41	46.00	-27.59	Peak
5	502.50	-6.32	29.34	23.02	46.00	-22.98	Peak
6	816.68	-2.47	29.97	27.50	46.00	-18.50	Peak

MEGMEET (MPT150-24V-TZ-B)


9kHz-150kHz

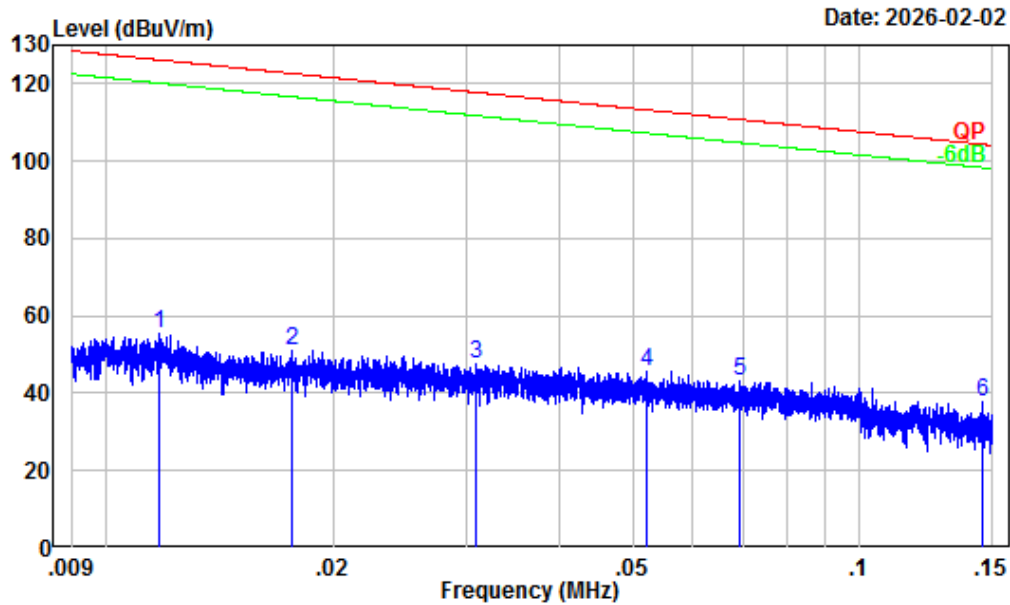

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	31.97	23.55	55.52	126.21	-70.69	Peak
2	0.018	30.85	20.24	51.09	122.67	-71.58	Peak
3	0.031	28.40	19.22	47.62	117.79	-70.17	Peak
4	0.052	26.20	19.64	45.84	113.28	-67.44	Peak
5	0.069	24.46	18.51	42.97	110.78	-67.81	Peak
6	0.145	19.32	18.70	38.02	104.35	-66.33	Peak


150kHz-30MHz

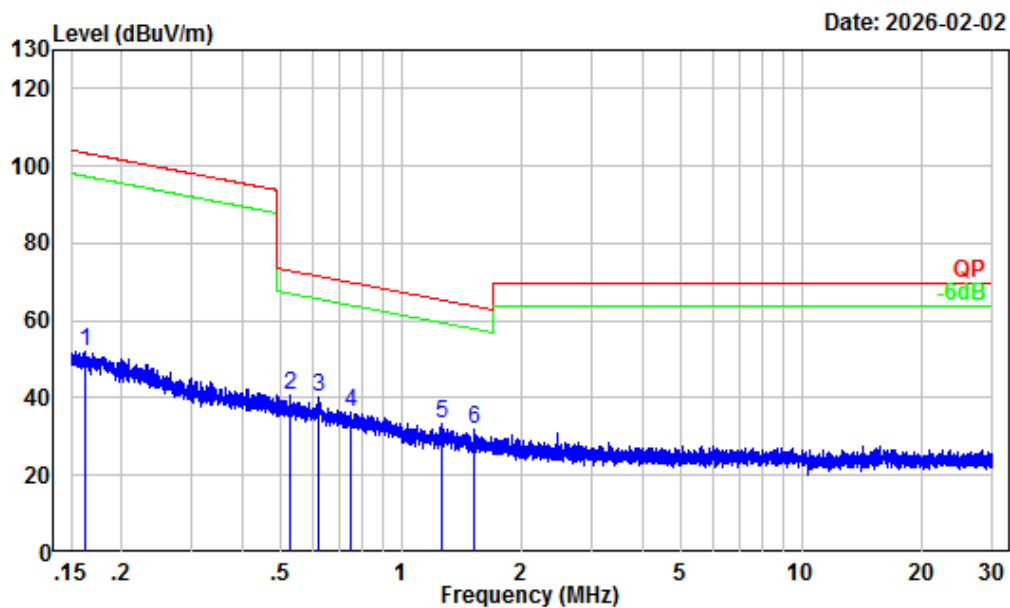

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.162	18.33	33.80	52.13	103.40	-51.27	Peak
2	0.530	6.03	34.51	40.54	73.10	-32.56	Peak
3	0.624	4.87	35.26	40.13	71.65	-31.52	Peak
4	0.745	3.38	32.79	36.17	70.08	-33.91	Peak
5	1.264	0.46	32.95	33.41	65.40	-31.99	Peak
6	1.522	-0.26	32.31	32.05	63.75	-31.70	Peak


30MHz-1GHz_Horizontal

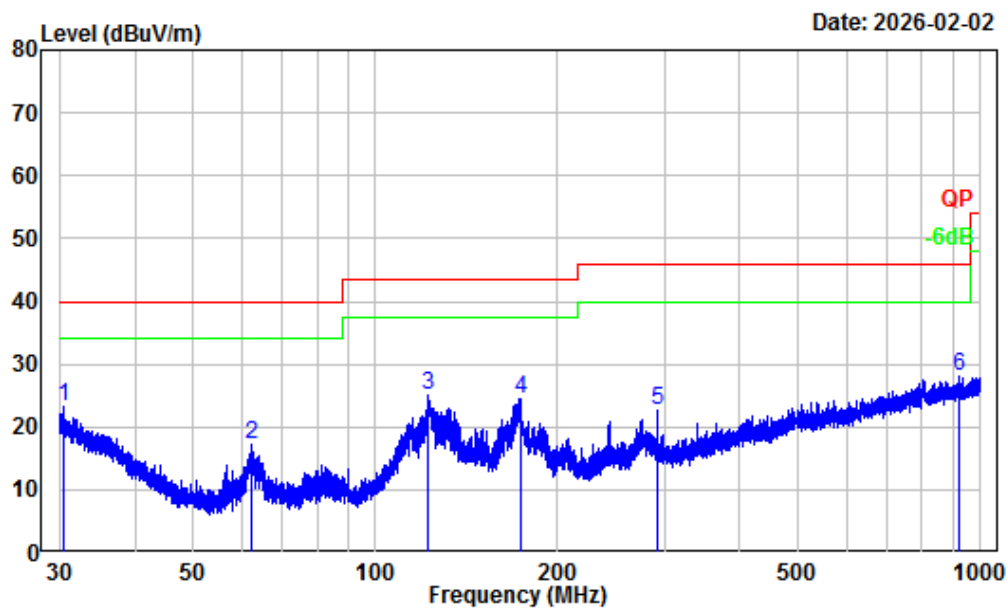

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.45	-6.19	29.56	23.37	40.00	-16.63	Peak
2	62.35	-18.11	35.28	17.17	40.00	-22.83	Peak
3	122.14	-11.23	36.20	24.97	43.50	-18.53	Peak
4	173.36	-13.32	37.90	24.58	43.50	-18.92	Peak
5	291.80	-11.21	33.86	22.65	46.00	-23.35	Peak
6	922.92	-1.13	29.15	28.02	46.00	-17.98	Peak

30MHz-1GHz_Vertical

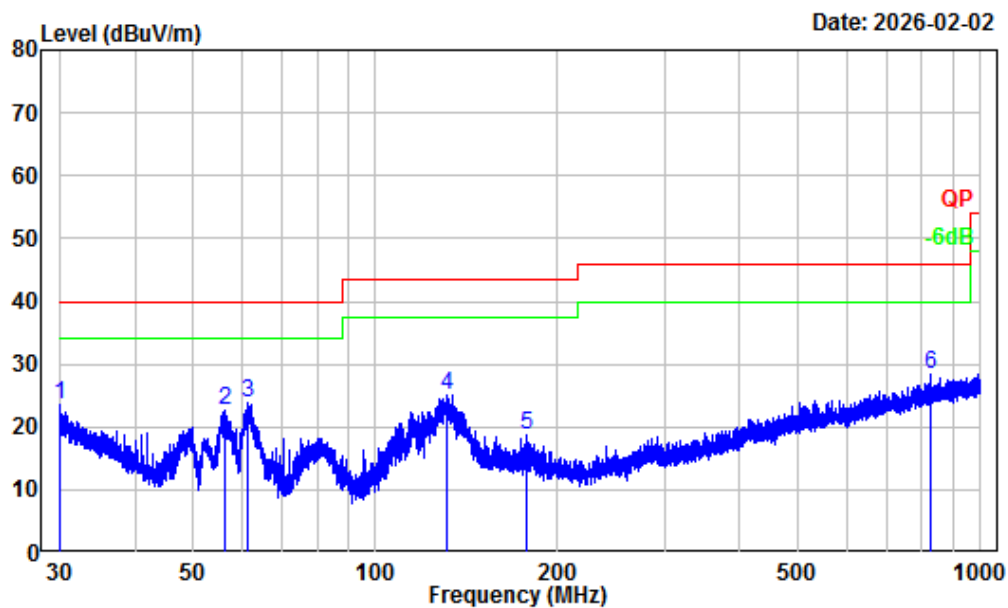


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.01	-5.97	29.45	23.48	40.00	-16.52	Peak
2	56.37	-18.32	40.98	22.66	40.00	-17.34	Peak
3	61.48	-18.11	41.87	23.76	40.00	-16.24	Peak
4	130.78	-11.29	36.34	25.05	43.50	-18.45	Peak
5	177.43	-13.50	32.16	18.66	43.50	-24.84	Peak
6	825.68	-1.94	30.41	28.47	46.00	-17.53	Peak

MEGMEET (MPT100-24V-TZ-B)


9kHz-150kHz

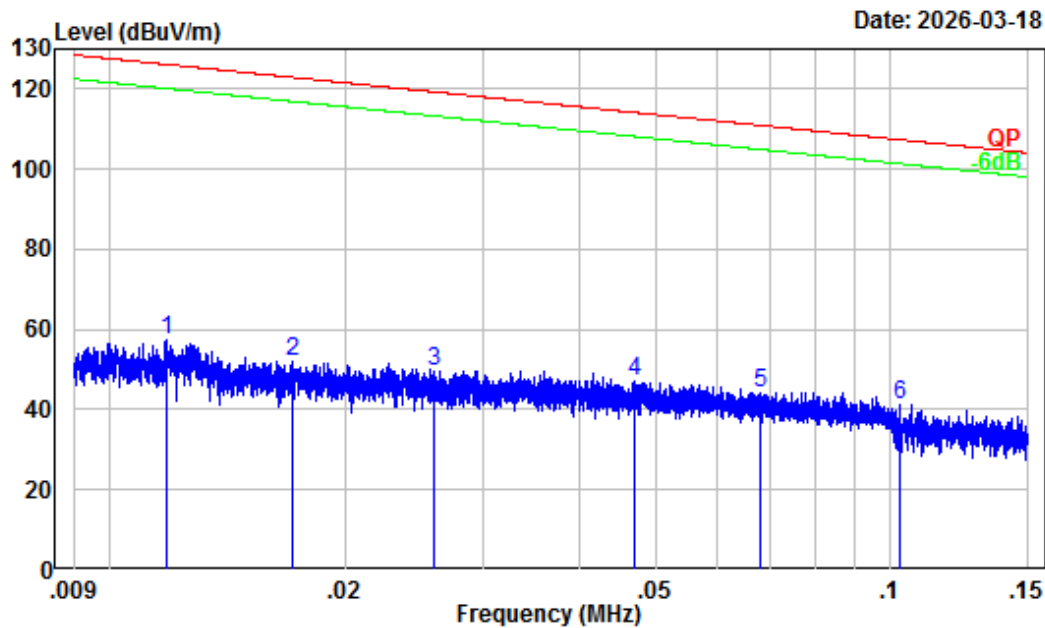

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	31.95	25.37	57.32	126.12	-68.80	Peak
2	0.017	30.94	21.18	52.12	122.91	-70.79	Peak
3	0.026	29.25	20.46	49.71	119.28	-69.57	Peak
4	0.047	26.72	20.29	47.01	114.18	-67.17	Peak
5	0.068	24.58	19.79	44.37	110.93	-66.56	Peak
6	0.103	21.83	19.47	41.30	107.36	-66.06	Peak


150kHz-30MHz

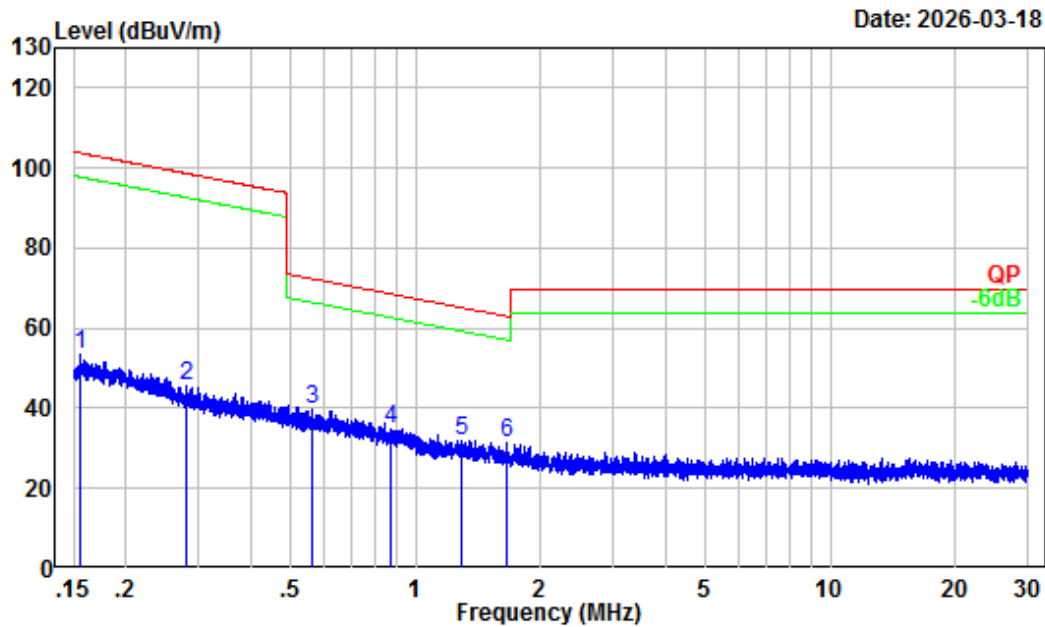

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.156	18.70	34.69	53.39	103.75	-50.36	Peak
2	0.279	11.43	34.36	45.79	98.69	-52.90	Peak
3	0.564	5.61	33.91	39.52	72.55	-33.03	Peak
4	0.870	2.18	32.60	34.78	68.71	-33.93	Peak
5	1.288	0.39	31.63	32.02	65.23	-33.21	Peak
6	1.654	-0.63	32.05	31.42	63.01	-31.59	Peak


30MHz-1GHz_Horizontal

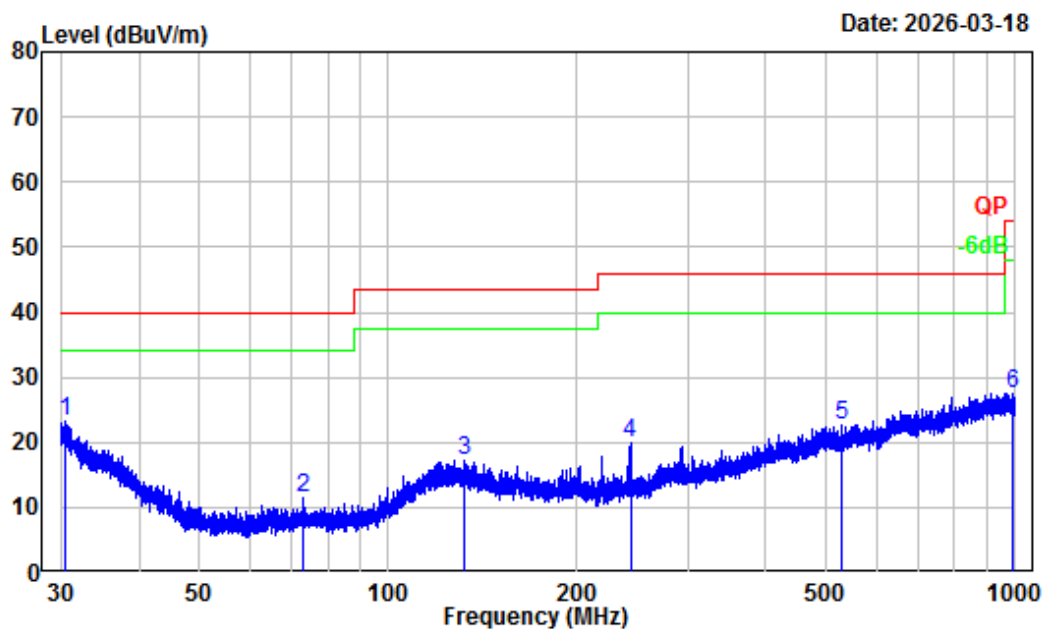

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.57	-6.17	29.34	23.17	40.00	-16.83	Peak
2	73.17	-17.97	29.42	11.45	40.00	-28.55	Peak
3	132.22	-11.69	28.90	17.21	43.50	-26.29	Peak
4	243.27	-13.66	33.51	19.85	46.00	-26.15	Peak
5	528.94	-6.35	28.90	22.55	46.00	-23.45	Peak
6	994.32	-0.99	28.54	27.55	54.00	-26.45	Peak

30MHz-1GHz_Vertical

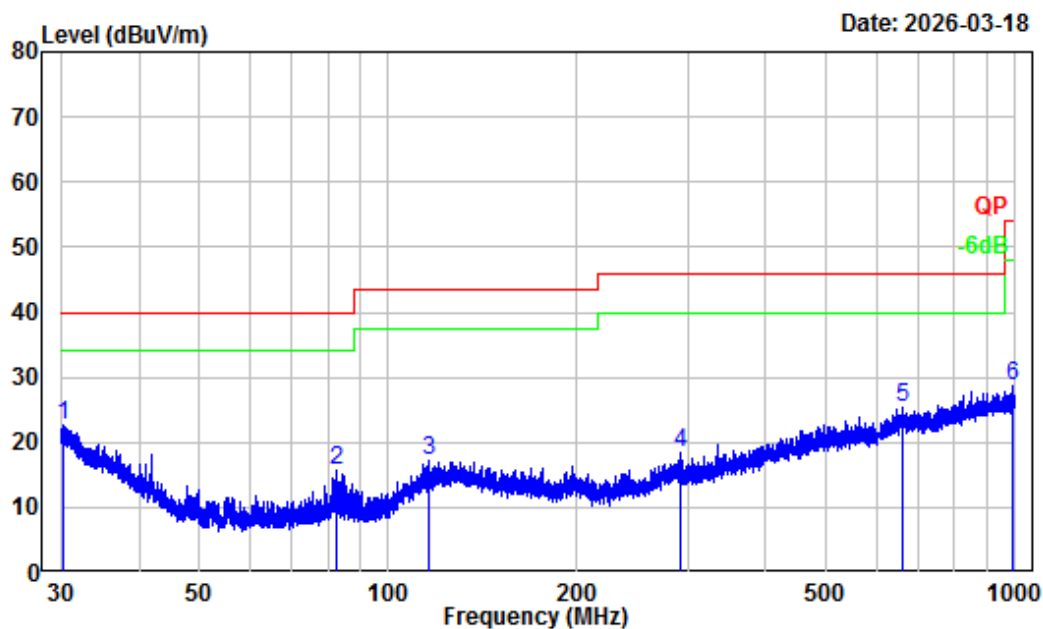


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.36	-6.05	28.57	22.52	40.00	-17.48	Peak
2	82.87	-18.23	34.06	15.83	40.00	-24.17	Peak
3	115.67	-12.39	29.72	17.33	43.50	-26.17	Peak
4	291.93	-11.62	29.96	18.34	46.00	-27.66	Peak
5	660.57	-3.65	29.03	25.38	46.00	-20.62	Peak
6	989.97	-1.09	29.64	28.55	54.00	-25.45	Peak

HuntKey (HKI100-240ND)


9kHz-150kHz

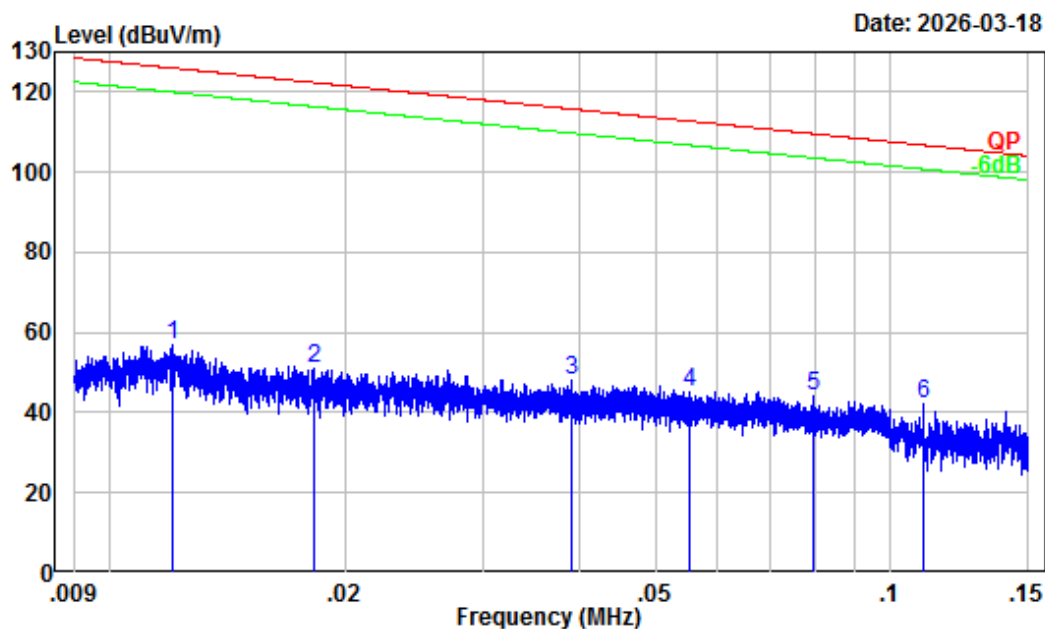

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	31.91	25.19	57.10	126.00	-68.90	Peak
2	0.018	30.72	20.16	50.88	122.35	-71.47	Peak
3	0.039	27.56	20.33	47.89	115.78	-67.89	Peak
4	0.055	25.87	19.49	45.36	112.75	-67.39	Peak
5	0.080	23.42	20.61	44.03	109.56	-65.53	Peak
6	0.110	21.40	20.66	42.06	106.77	-64.71	Peak


150kHz-30MHz

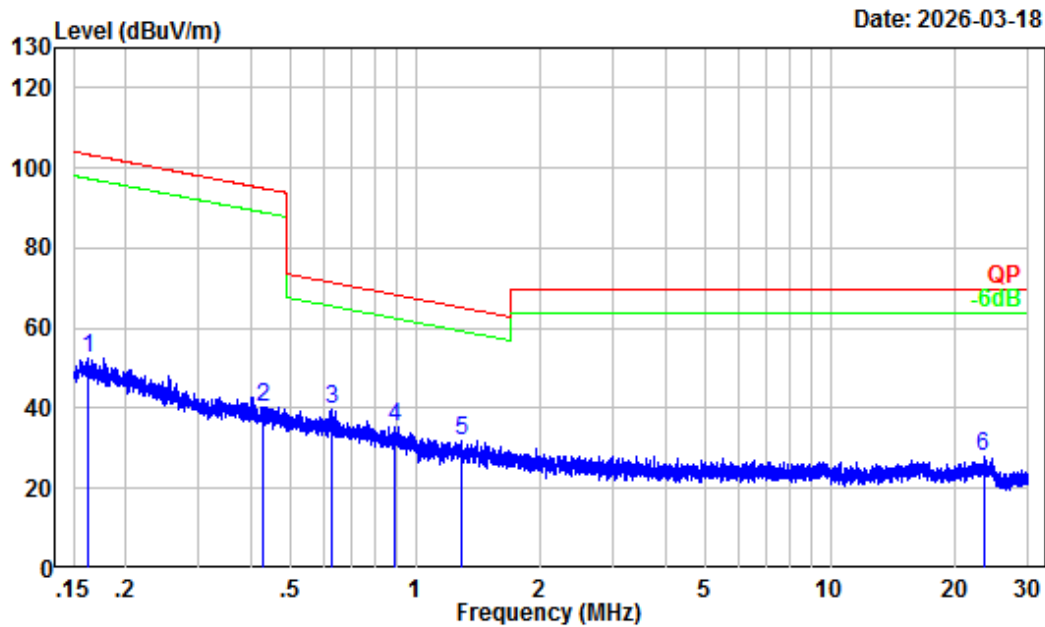

Site : Chamber A
Condition : 3m
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.163	18.28	34.20	52.48	103.36	-50.88	Peak
2	0.430	7.73	32.74	40.47	94.94	-54.47	Peak
3	0.628	4.83	34.82	39.65	71.61	-31.96	Peak
4	0.887	2.05	33.30	35.35	68.54	-33.19	Peak
5	1.292	0.38	31.60	31.98	65.20	-33.22	Peak
6	23.402	-3.10	30.96	27.86	69.54	-41.68	Peak


30MHz-1GHz_Horizontal

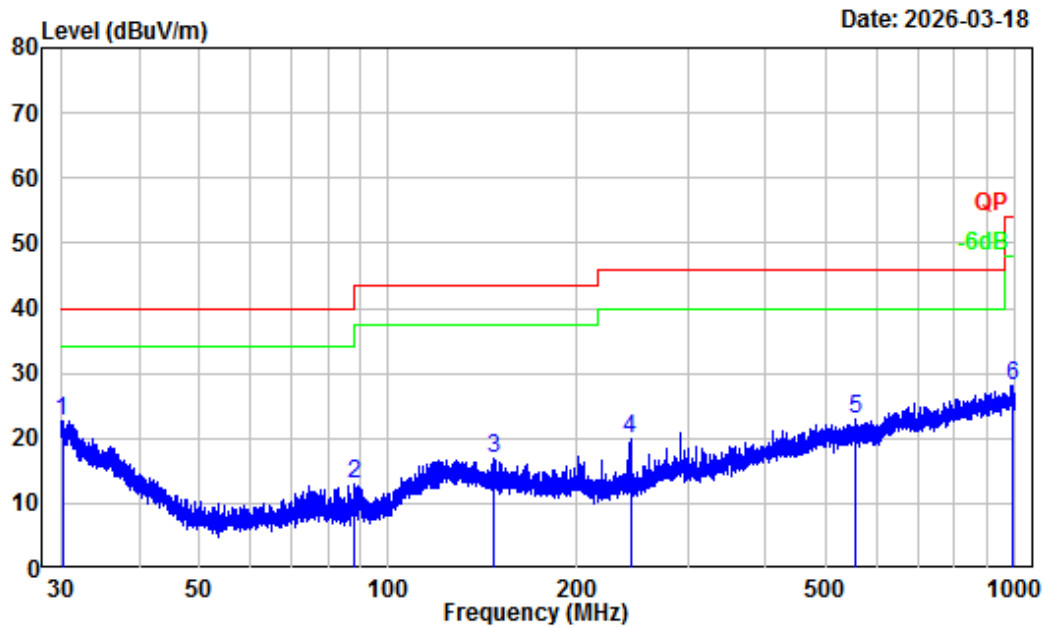

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.17	-5.96	28.73	22.77	40.00	-17.23	Peak
2	88.30	-18.25	31.14	12.89	43.50	-30.61	Peak
3	147.40	-12.64	29.55	16.91	43.50	-26.59	Peak
4	243.27	-13.66	33.70	20.04	46.00	-25.96	Peak
5	554.58	-5.90	28.82	22.92	46.00	-23.08	Peak
6	993.88	-1.00	29.22	28.22	54.00	-25.78	Peak

30MHz-1GHz_Vertical

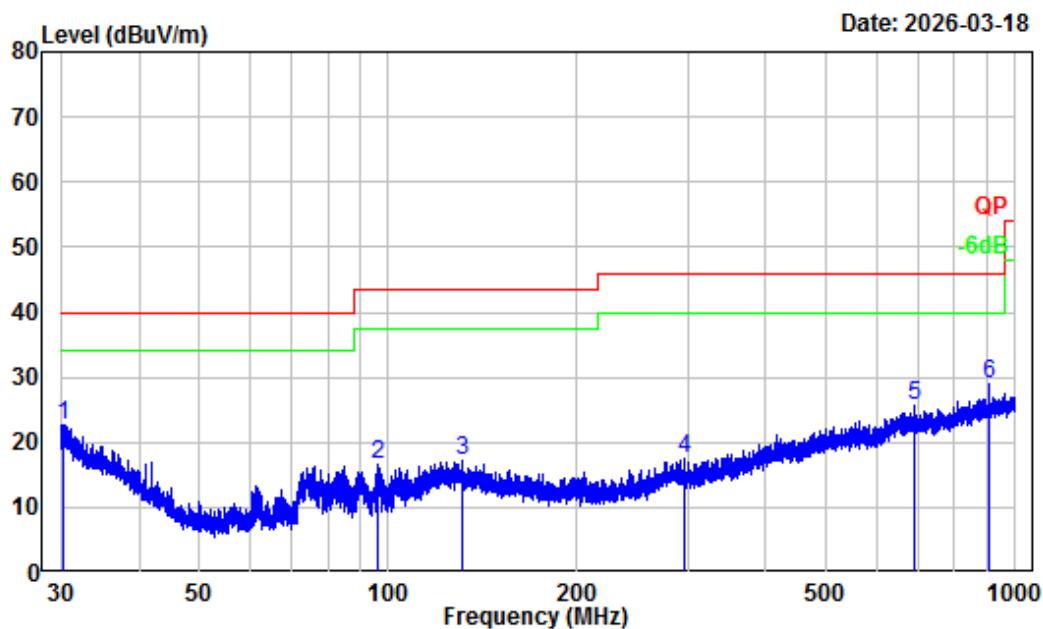

Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P11316E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.24	-5.99	28.69	22.70	40.00	-17.30	Peak
2	96.14	-17.19	33.82	16.63	43.50	-26.87	Peak
3	131.12	-11.67	28.73	17.06	43.50	-26.44	Peak
4	296.57	-11.61	29.20	17.59	46.00	-28.41	Peak
5	692.29	-3.88	29.64	25.76	46.00	-20.24	Peak
6	911.26	-1.67	30.62	28.95	46.00	-17.05	Peak

Above 1GHz:

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11b							
Low Channel							
4824.00	65.40	PK	H	-7.80	57.60	74	-16.40
4824.00	56.52	AV	H	-7.80	48.72	54	-5.28
4824.00	65.67	PK	V	-7.80	57.87	74	-16.13
4824.00	58.44	AV	V	-7.80	50.64	54	-3.36
Middle Channel							
4884.00	66.37	PK	H	-7.65	58.72	74	-15.28
4884.00	58.95	AV	H	-7.65	51.30	54	-2.70
4884.00	66.91	PK	V	-7.65	59.26	74	-14.74
4884.00	60.12	AV	V	-7.65	52.47	54	-1.53
High Channel							
4944.00	64.71	PK	H	-7.64	57.07	74	-16.93
4944.00	57.86	AV	H	-7.64	50.22	54	-3.78
4944.00	68.53	PK	V	-7.64	60.89	74	-13.11
4944.00	61.51	AV	V	-7.64	53.87	54	-0.13
802.11g							
Low Channel							
4824.00	63.19	PK	H	-7.80	55.39	74	-18.61
4824.00	47.86	AV	H	-7.80	40.06	54	-13.94
4824.00	63.55	PK	V	-7.80	55.75	74	-18.25
4824.00	48.50	AV	V	-7.80	40.70	54	-13.30
Middle Channel							
4884.00	63.96	PK	H	-7.65	56.31	74	-17.69
4884.00	48.88	AV	H	-7.65	41.23	54	-12.77
4884.00	64.28	PK	V	-7.65	56.63	74	-17.37
4884.00	49.10	AV	V	-7.65	41.45	54	-12.55
High Channel							
4944.00	61.71	PK	H	-7.64	54.07	74	-19.93
4944.00	46.94	AV	H	-7.64	39.30	54	-14.70
4944.00	65.87	PK	V	-7.64	58.23	74	-15.77
4944.00	50.99	AV	V	-7.64	43.35	54	-10.65

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n20							
Low Channel							
4824.00	63.56	PK	H	-7.80	55.76	74	-18.24
4824.00	47.80	AV	H	-7.80	40.00	54	-14.00
4824.00	64.12	PK	V	-7.80	56.32	74	-17.68
4824.00	49.56	AV	V	-7.80	41.76	54	-12.24
Middle Channel							
4884.00	62.41	PK	H	-7.65	54.76	74	-19.24
4884.00	48.25	AV	H	-7.65	40.60	54	-13.40
4884.00	63.24	PK	V	-7.65	55.59	74	-18.41
4884.00	48.89	AV	V	-7.65	41.24	54	-12.76
High Channel							
4944.00	61.20	PK	H	-7.64	53.56	74	-20.44
4944.00	46.74	AV	H	-7.64	39.10	54	-14.90
4944.00	64.71	PK	V	-7.64	57.07	74	-16.93
4944.00	49.92	AV	V	-7.64	42.28	54	-11.72
802.11n40							
Low Channel							
4844.00	59.19	PK	H	-7.78	51.41	74	-22.59
4844.00	60.51	PK	V	-7.78	52.73	74	-21.27
Middle Channel							
4884.00	59.36	PK	H	-7.65	51.71	74	-22.29
4884.00	60.98	PK	V	-7.65	53.33	74	-20.67
High Channel							
4924.00	61.14	PK	H	-7.62	53.52	74	-20.48
4924.00	46.14	AV	H	-7.62	38.52	54	-15.48
4924.00	61.70	PK	V	-7.62	54.08	74	-19.92
4924.00	47.60	AV	V	-7.62	39.98	54	-14.02

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.

Test plots**Band Edge**


Left Band edge Horizontal 802.11b

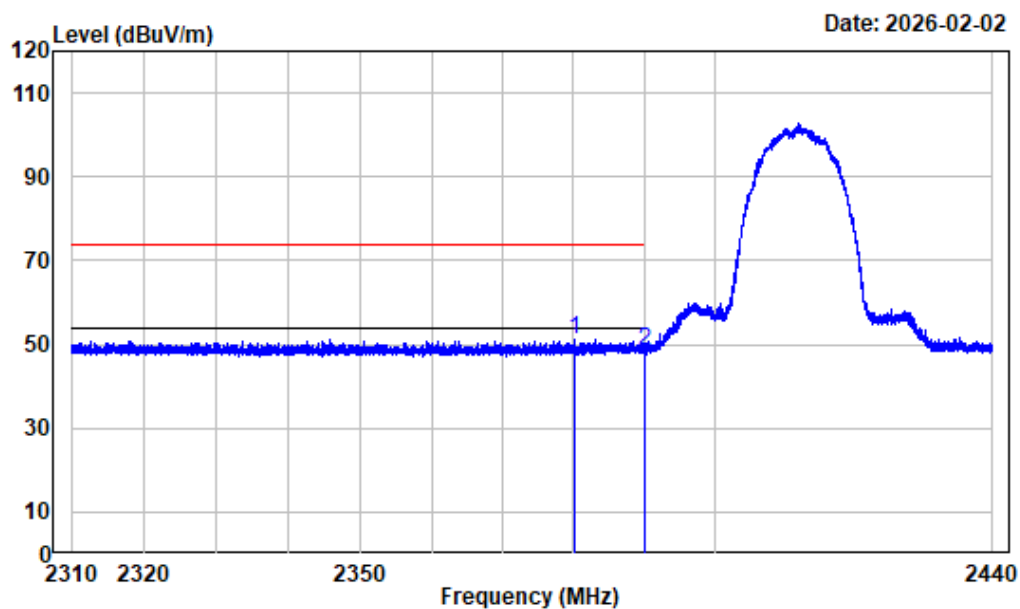

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2412

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2380.135	-10.95	62.33	51.38	74.00	-22.62 Peak
2	2390.000	-10.97	59.51	48.54	74.00	-25.46 Peak


Left Band edge_Vertical_802.11b

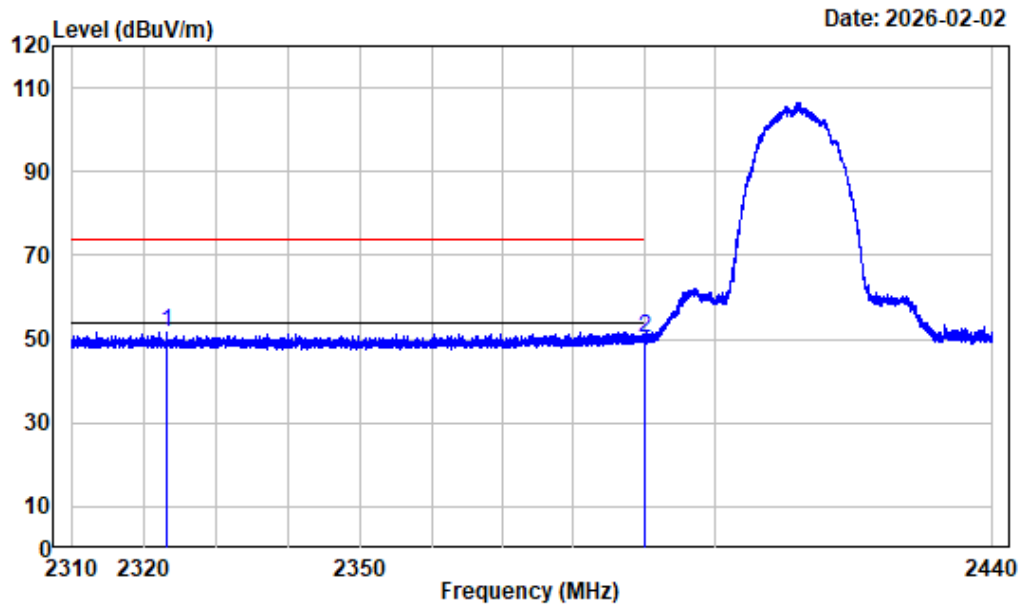

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2412

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2323.049	-10.82	62.65	51.83	74.00	-22.17 Peak
2	2390.000	-10.97	61.34	50.37	74.00	-23.63 Peak


Right Band edge_Horizontal_802.11b

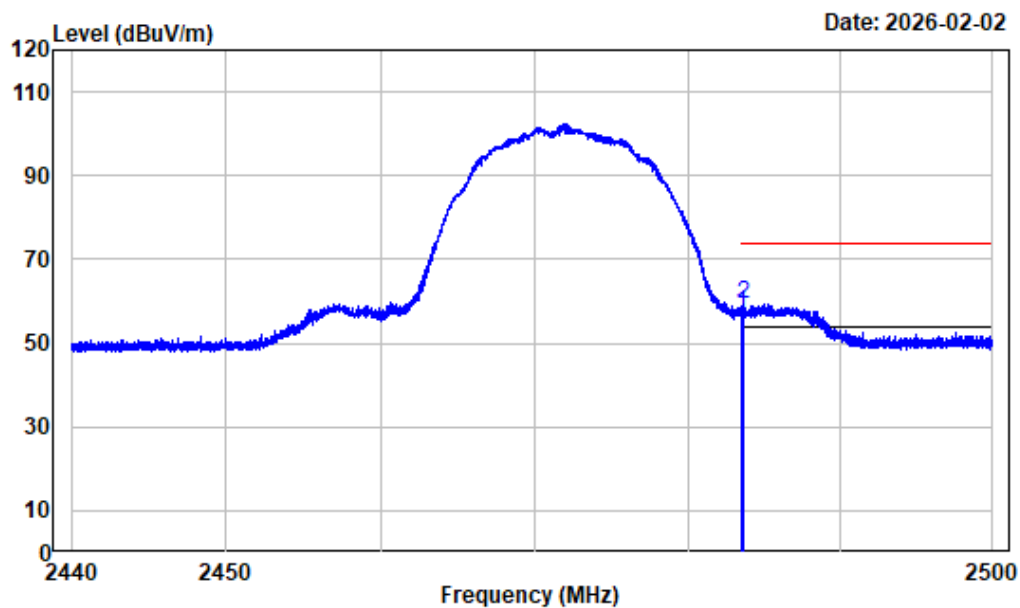

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	68.13	57.20	74.00	-16.80	Peak
2 2483.680	-10.93	70.25	59.32	74.00	-14.68	Peak


Right Band edge_Horizontal_Average_802.11b

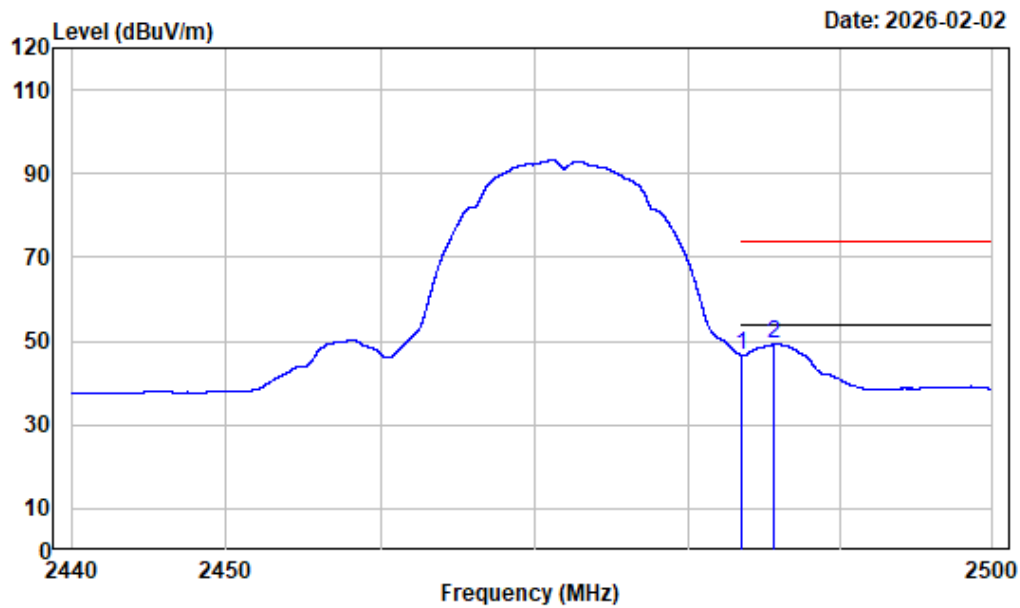

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	57.61	46.68	54.00	-7.32	Average
2 2485.675	-10.93	60.25	49.32	54.00	-4.68	Average


Right Band edge_Vertical_802.11b

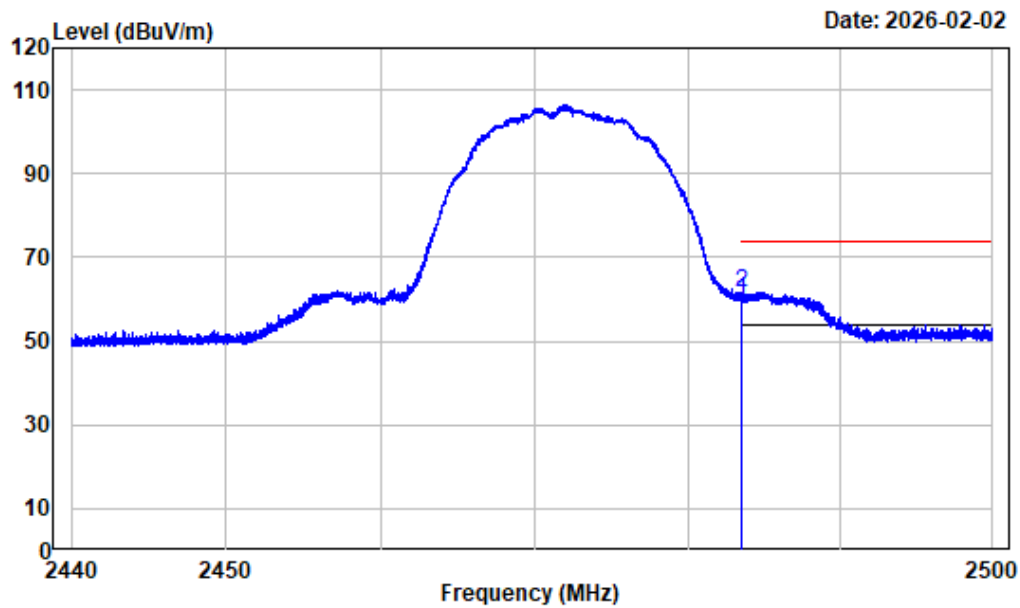

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	70.90	59.97	74.00	-14.03	Peak
2 2483.552	-10.93	72.64	61.71	74.00	-12.29	Peak


Right Band edge_Vertical_Average_802.11b

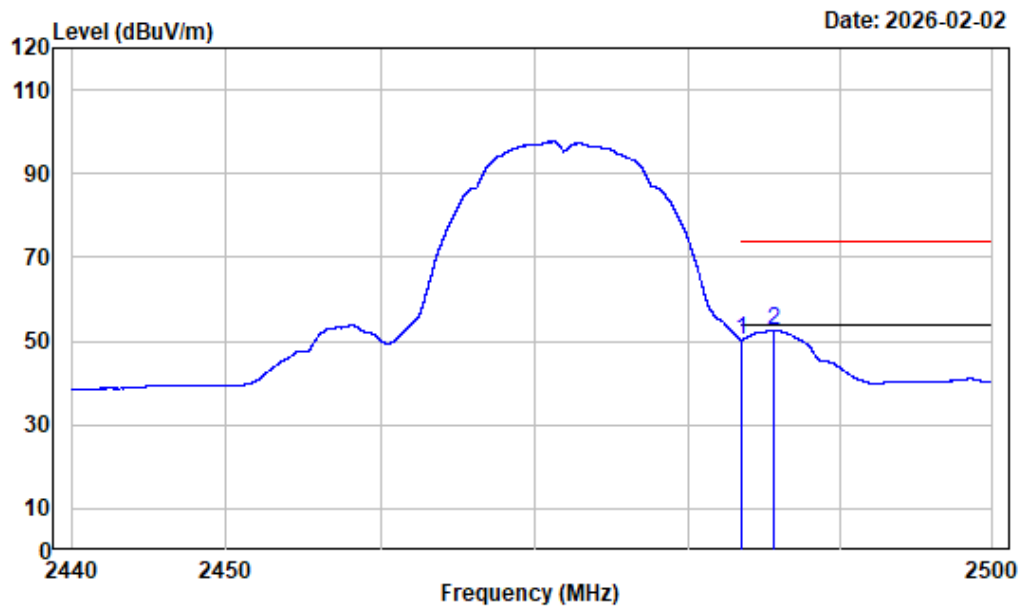

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	61.31	50.38	54.00	-3.62	Average
2 2485.667	-10.93	63.56	52.63	54.00	-1.37	Average


Left Band edge_Horizontal_802.11g

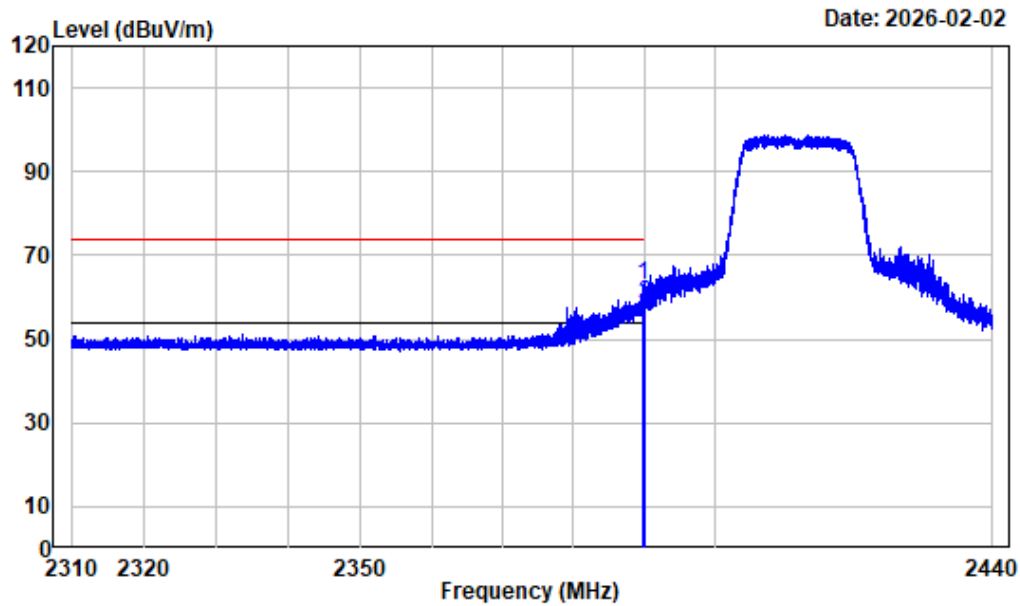

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2412

	Freq Factor		Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.804	-10.97	73.87	62.90	74.00	-11.10	Peak
2	2390.000	-10.97	69.21	58.24	74.00	-15.76	Peak


Left Band edge_Horizontal_Average_802.11g

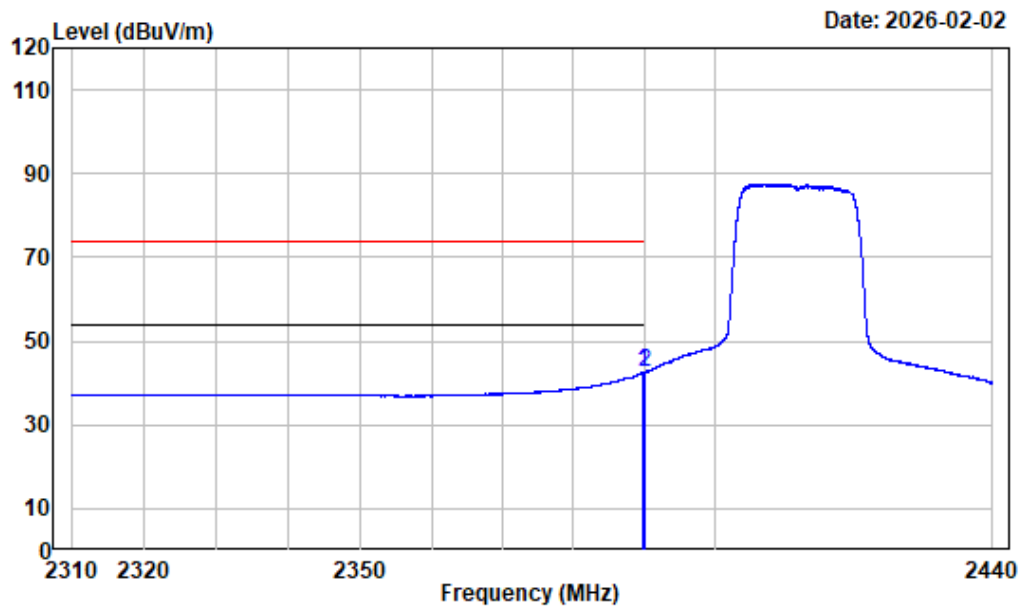

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_g_2412

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2389.917	-10.97	53.51	42.54	54.00	-11.46	Average
2 2390.000	-10.97	53.38	42.41	54.00	-11.59	Average


Left Band edge_Vertical_802.11g

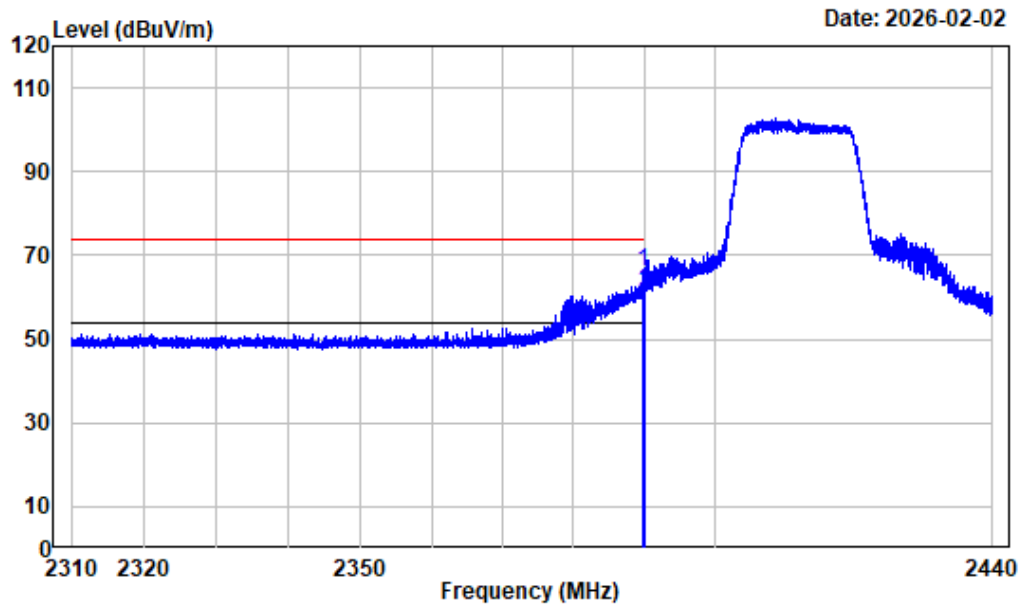

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2412

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.804	-10.97	77.12	66.15	74.00	-7.85	Peak
2	2390.000	-10.97	72.14	61.17	74.00	-12.83	Peak


Left Band edge_Vertical_Average_802.11g

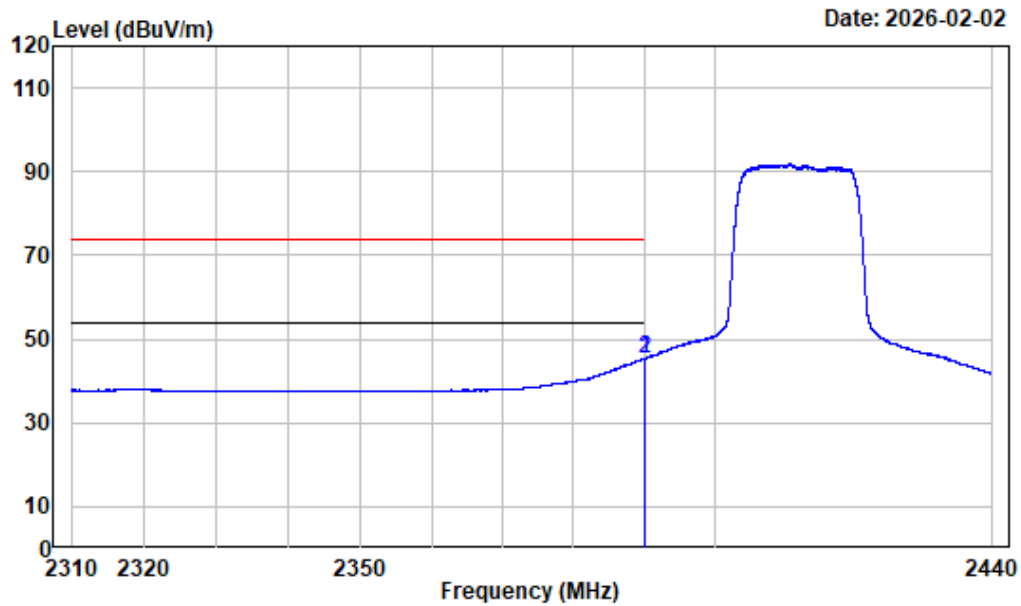

Condition : Vertical
 Project No. : 2601P11316E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
 Note : 2.4GWiFi_g_2412

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.982	-10.97	56.38	45.41	54.00	-8.59	Average
2	2390.000	-10.97	56.36	45.39	54.00	-8.61	Average


Right Band edge_Horizontal_802.11g

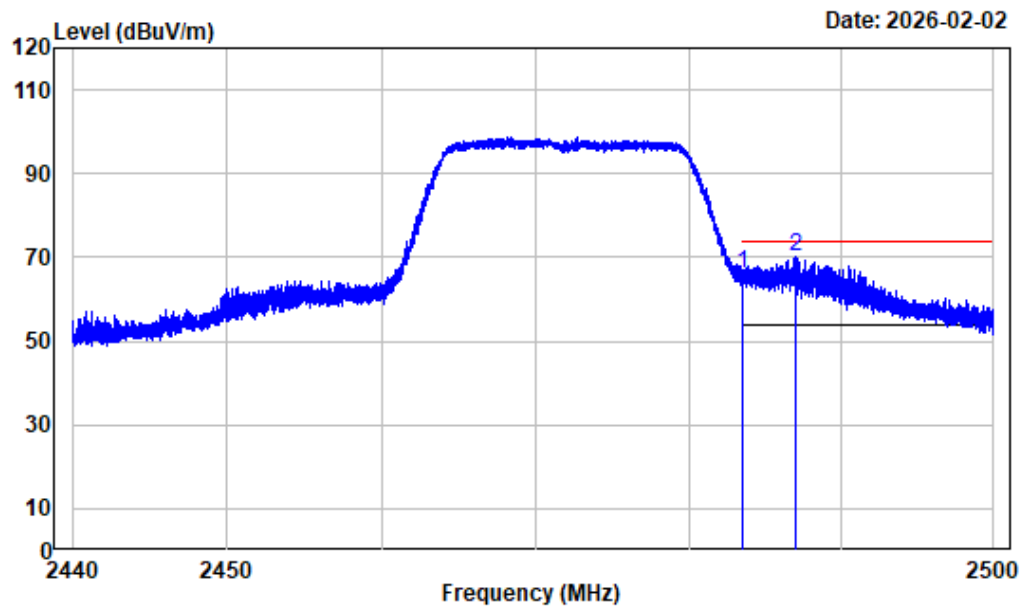

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2472

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	77.16	66.23	74.00	-7.77	Peak
2	2486.935	-10.92	81.15	70.23	74.00	-3.77	Peak


Right Band edge_Horizontal_Average_802.11g

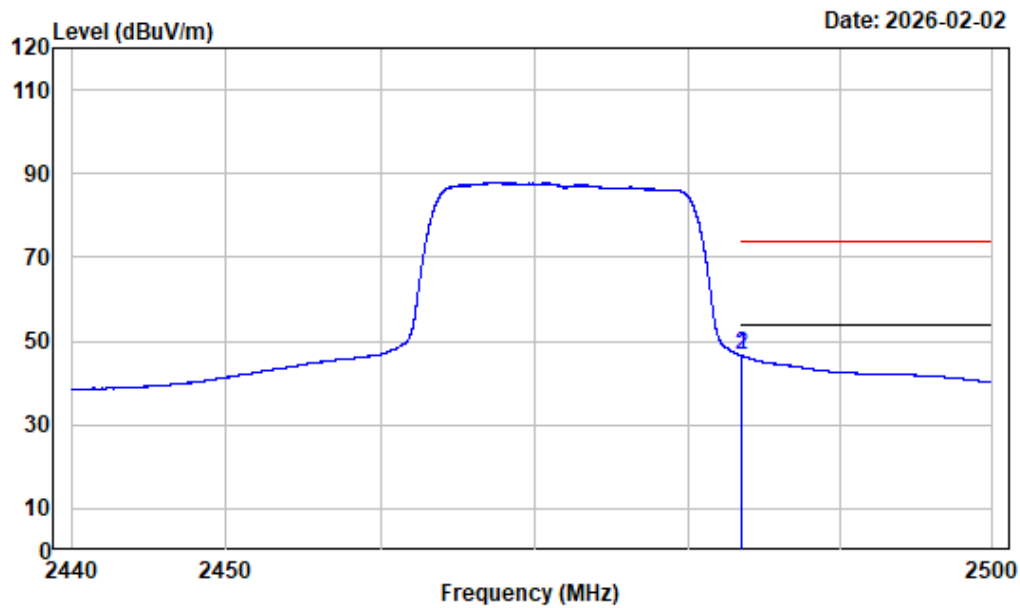

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_g_2472

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	57.47	46.54	54.00	-7.46	Average
2 2483.522	-10.93	57.50	46.57	54.00	-7.43	Average


Right Band edge_Vertical_802.11g

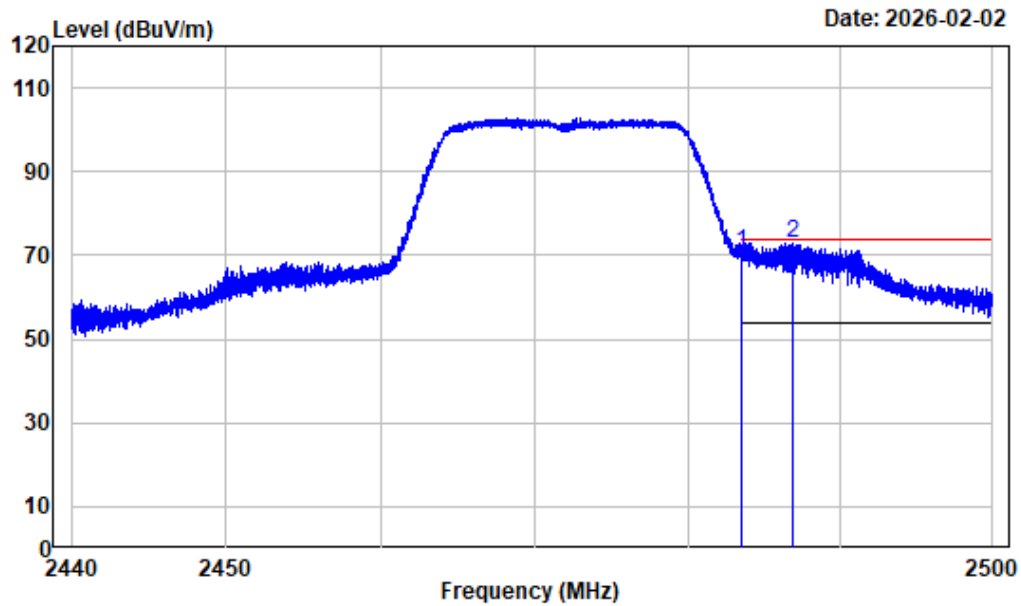

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2472

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	81.44	70.51	74.00	-3.49	Peak
2	2486.897	-10.92	84.02	73.10	74.00	-0.90	Peak


Right Band edge_Vertical_Average_802.11g

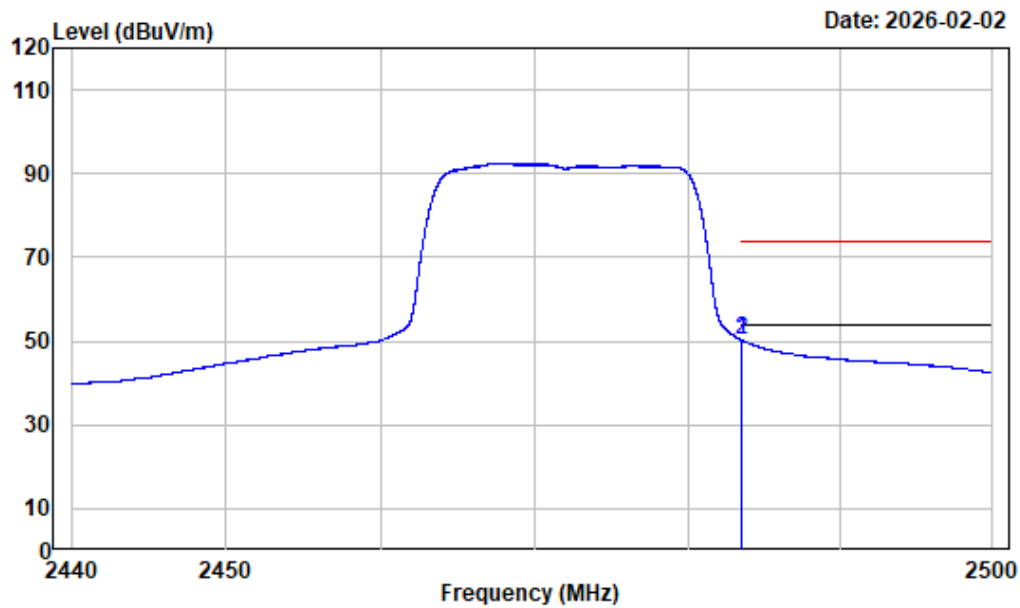

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_g_2472

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	61.32	50.39	54.00	-3.61	Average
2	2483.512	-10.93	61.33	50.40	54.00	-3.60	Average


Left Band edge_Horizontal_802.11n-HT20

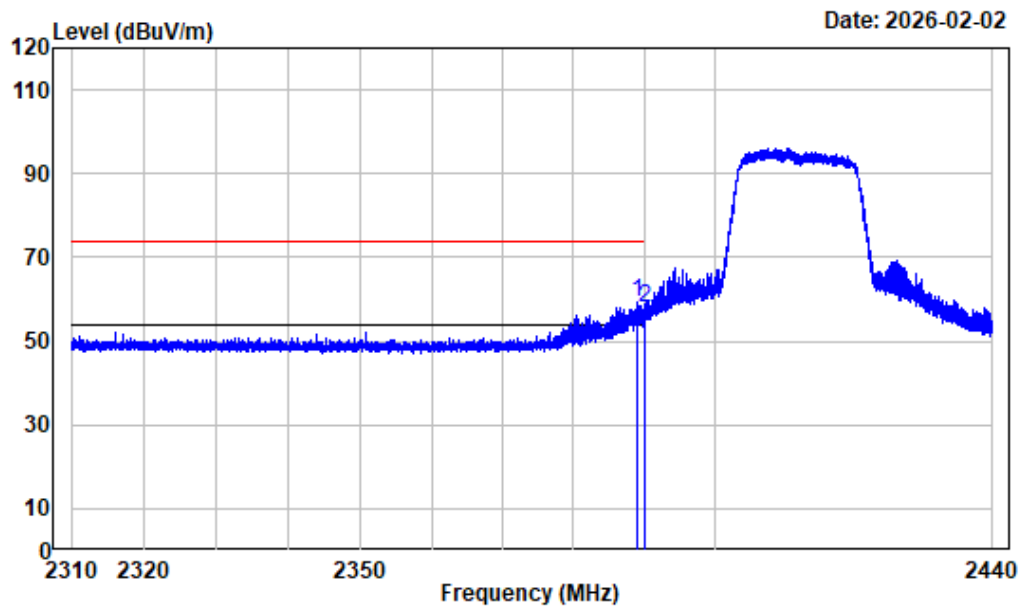

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2388.926	-10.96	70.14	59.18	74.00	-14.82	Peak
2	2390.000	-10.97	69.06	58.09	74.00	-15.91	Peak


Left Band edge_Horizontal_Average_802.11n-HT20

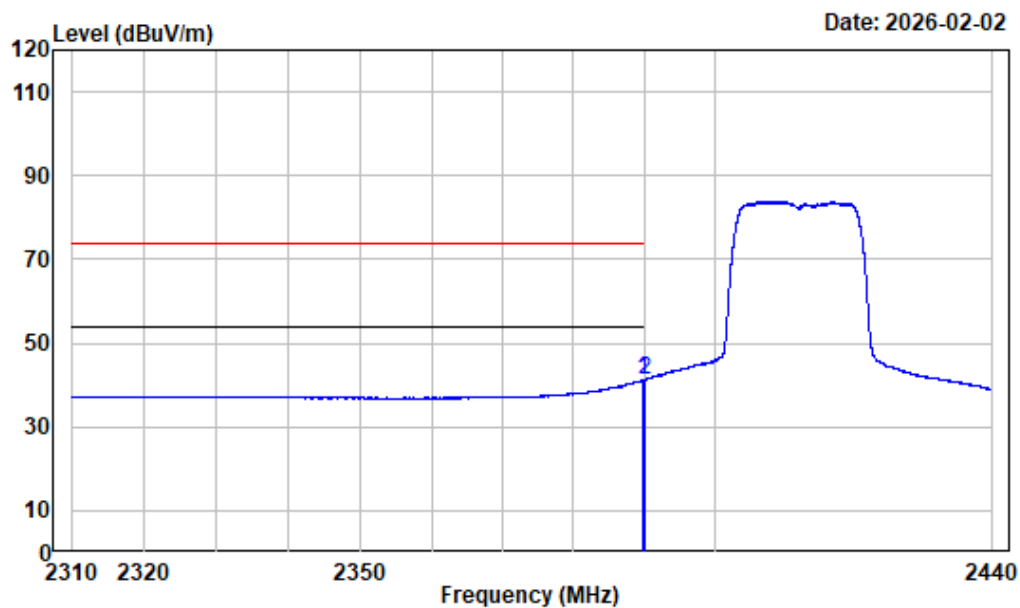

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_n20_2412

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.900	-10.97	52.23	41.26	54.00	-12.74 Average
2	2390.000	-10.97	52.22	41.25	54.00	-12.75 Average


Left Band edge_Vertical_802.11n-HT20

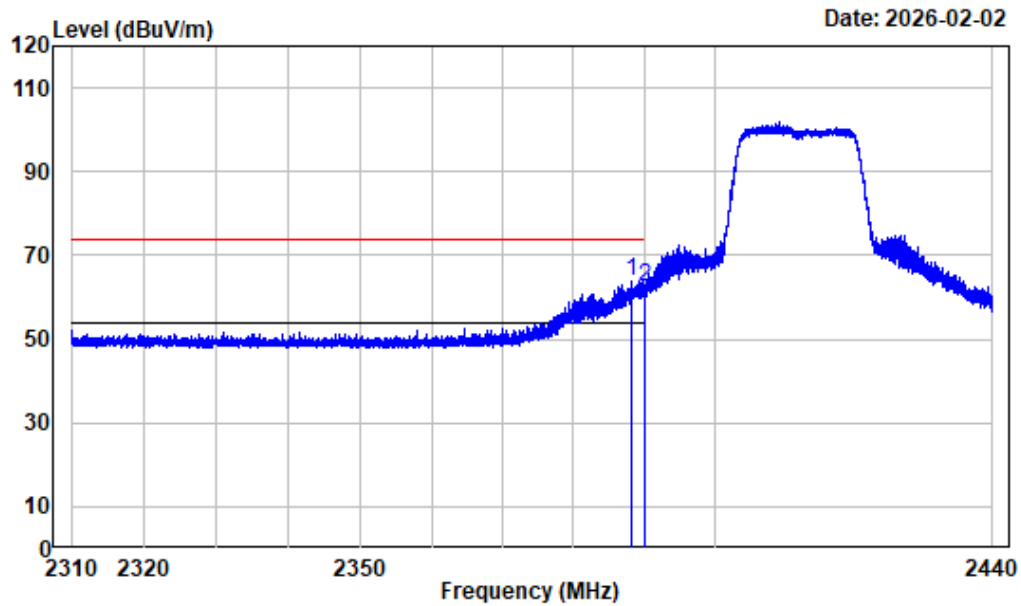

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2412

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2388.292	-10.96	74.97	64.01	74.00	-9.99	Peak
2	2390.000	-10.97	73.50	62.53	74.00	-11.47	Peak


Left Band edge_Vertical_Average_802.11n-HT20

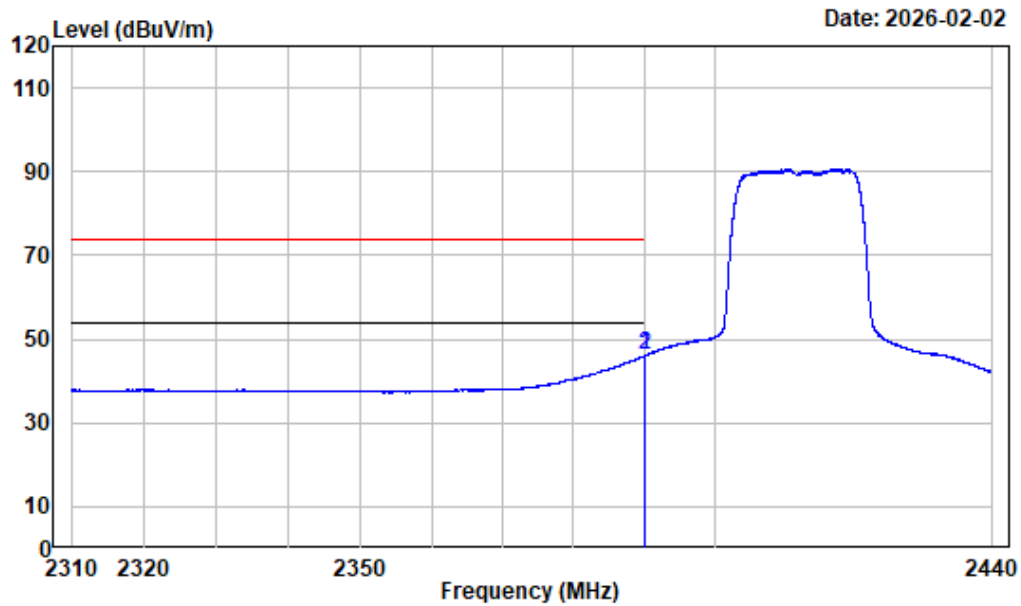

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_n20_2412

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	2389.982	-10.97	56.98	46.01	54.00	-7.99	Average
2	2390.000	-10.97	56.95	45.98	54.00	-8.02	Average


Right Band edge_Horizontal_802.11n-HT20

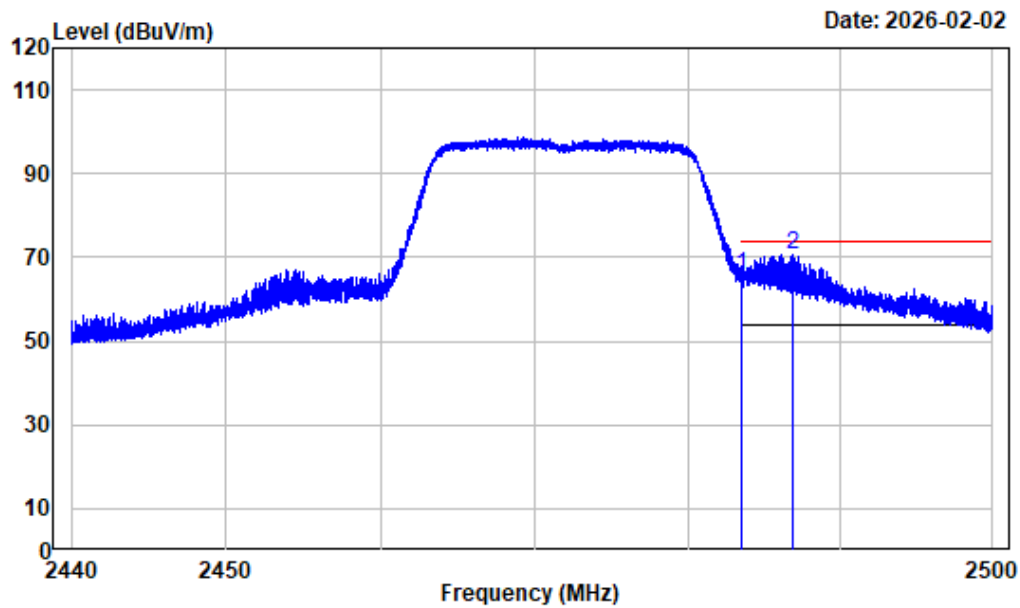

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2472

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	76.44	65.51	74.00	-8.49	Peak
2	2486.830	-10.92	81.71	70.79	74.00	-3.21	Peak


Right Band edge_Horizontal_Average_802.11n-HT20

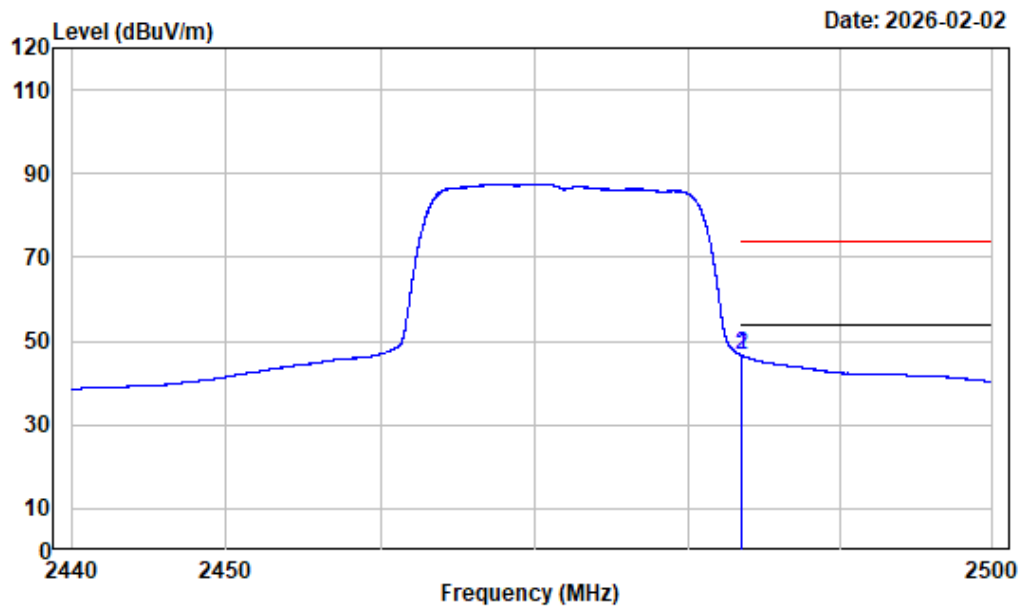

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_n20_2472

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	57.60	46.67	54.00	-7.33	Average
2 2483.505	-10.93	57.61	46.68	54.00	-7.32	Average


Right Band edge_Vertical_802.11n-HT20

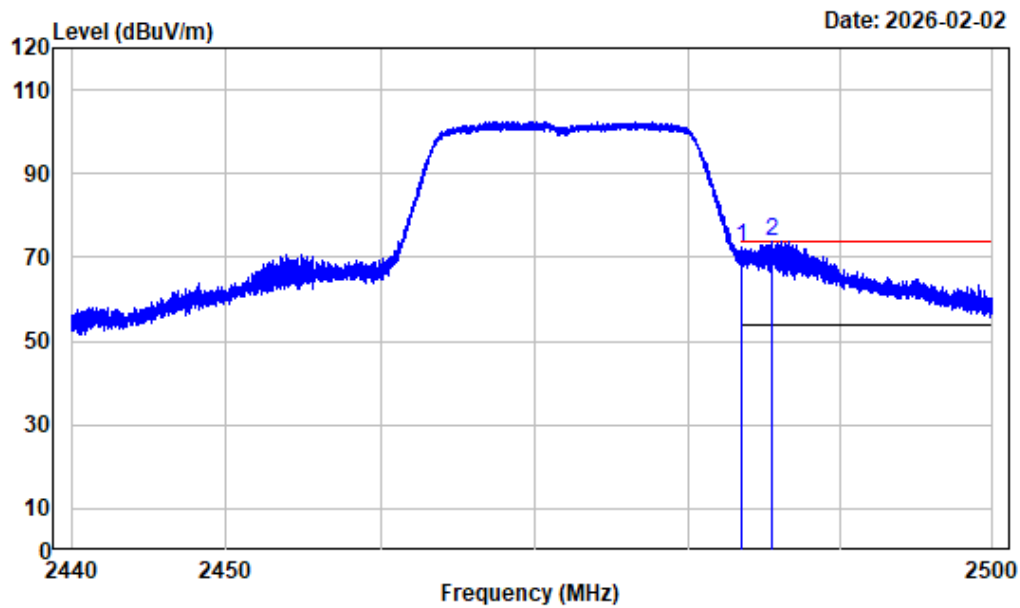

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2472

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	83.18	72.25	74.00	-1.75 Peak
2	2485.502	-10.93	84.59	73.66	74.00	-0.34 Peak


Right Band edge_Vertical_Average_802.11n-HT20

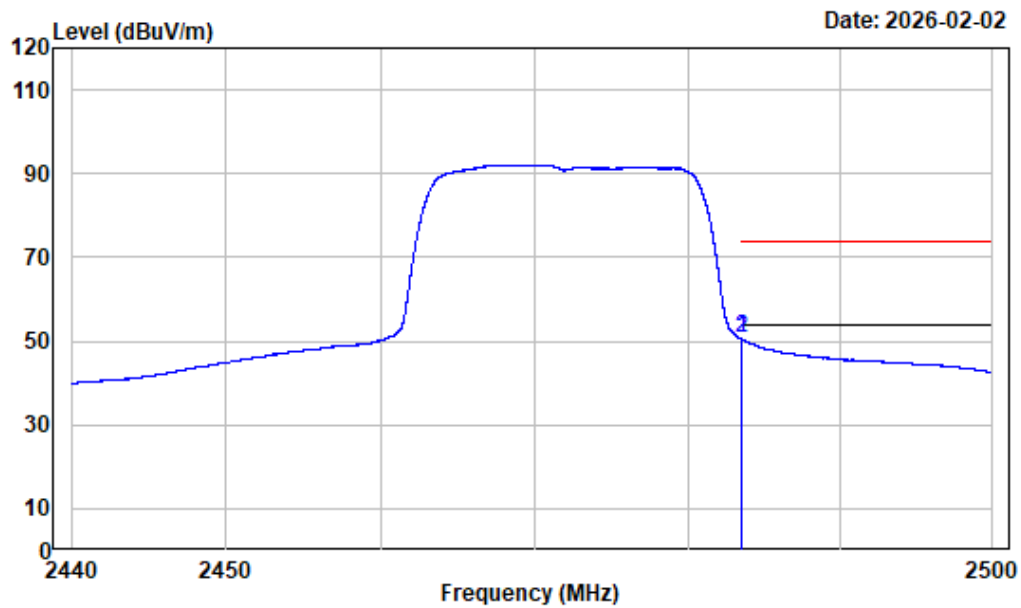

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_n20_2472

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	61.46	50.53	54.00	-3.47	Average
2	2483.514	-10.93	61.47	50.54	54.00	-3.46	Average


Left Band edge_Horizontal_802.11n-HT40

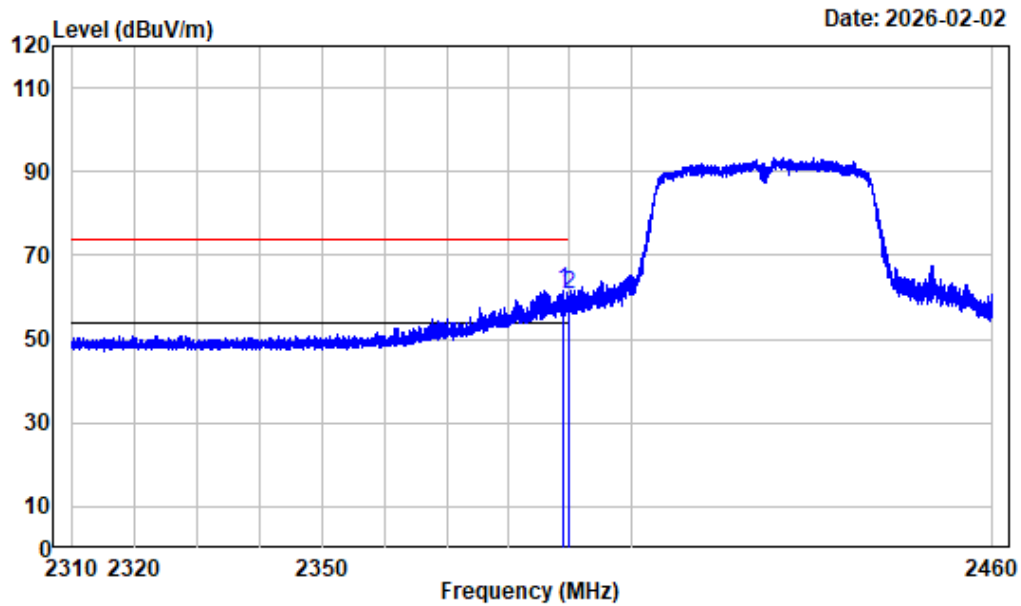

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2422

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2388.994	-10.96	72.66	61.70	74.00	-12.30	Peak
2	2390.000	-10.97	71.44	60.47	74.00	-13.53	Peak


Left Band edge_Horizontal_Average_802.11n-HT40

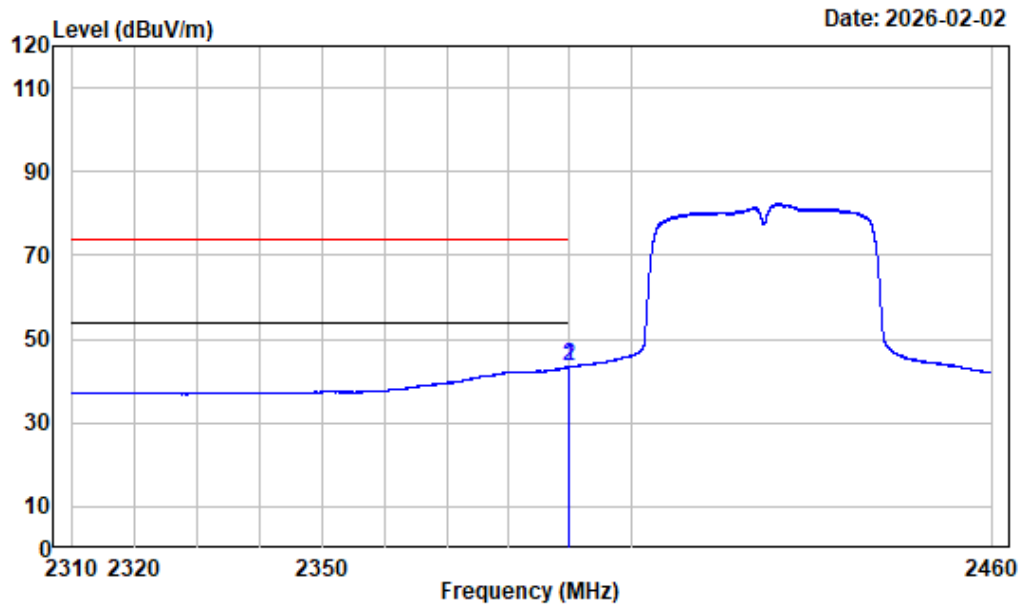

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_n40_2422

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.988	-10.97	54.33	43.36	54.00	-10.64 Average
2	2390.000	-10.97	54.32	43.35	54.00	-10.65 Average


Left Band edge_Vertical_802.11n-HT40

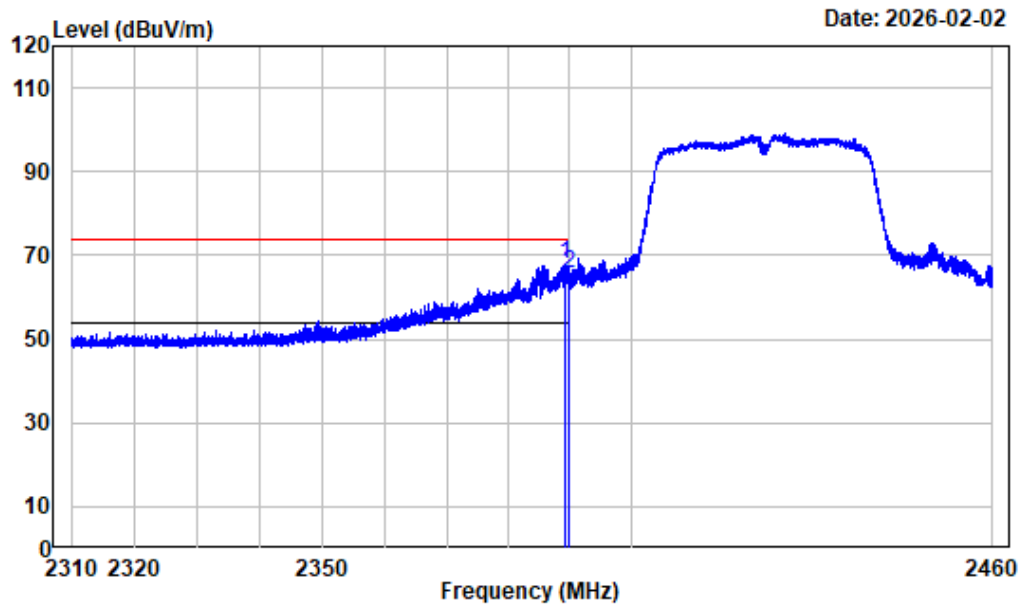

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2422

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.275	-10.96	79.00	68.04	74.00	-5.96	Peak
2	2390.000	-10.97	76.51	65.54	74.00	-8.46	Peak


Left Band edge_Vertical_Average_802.11n-HT40

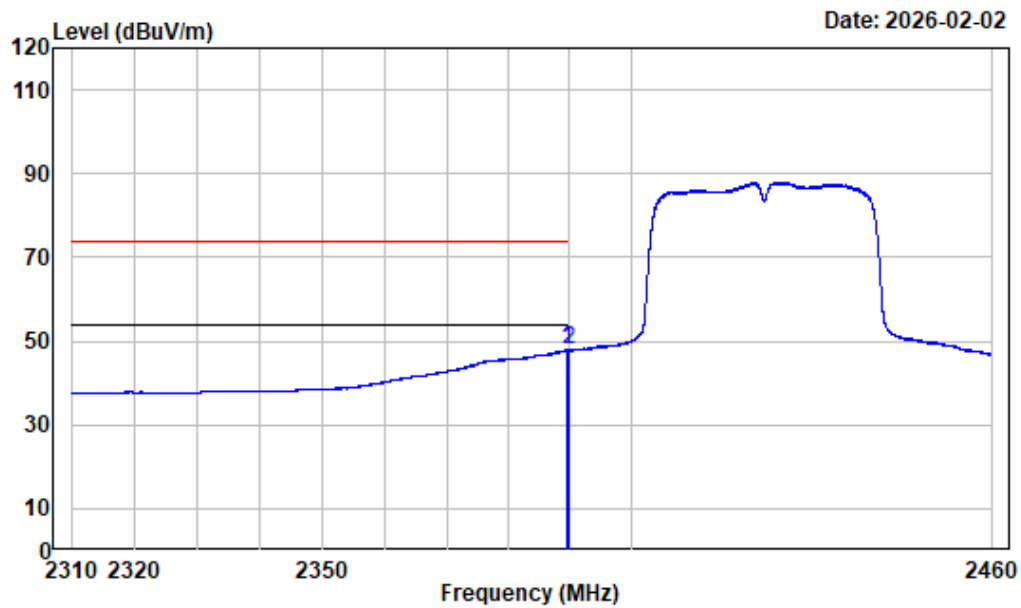

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_n40_2422

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	2389.538	-10.96	58.86	47.90	54.00	-6.10	Average
2	2390.000	-10.97	58.86	47.89	54.00	-6.11	Average


Right Band edge_Horizontal_802.11n-HT40

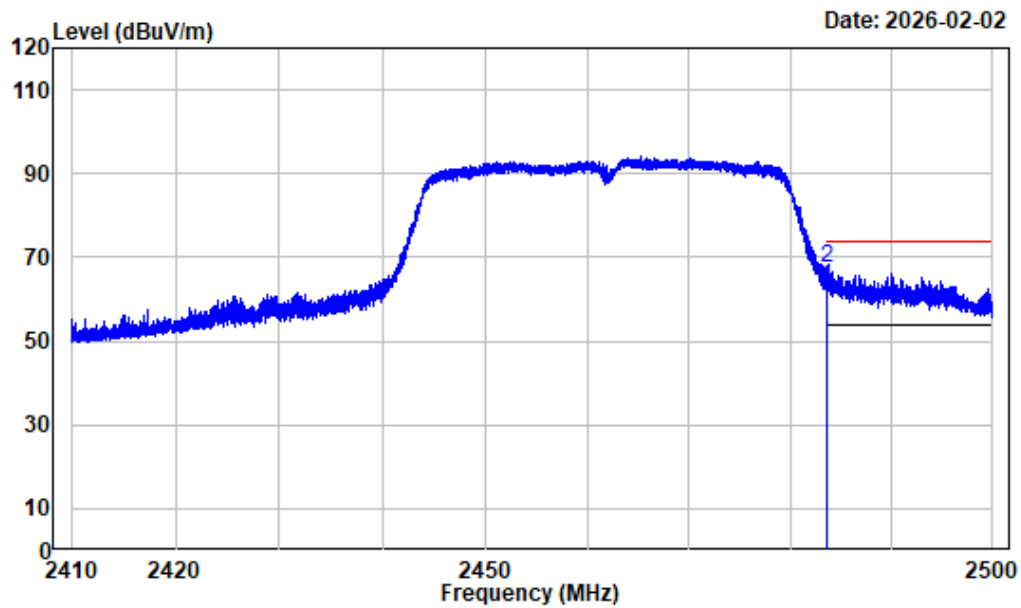

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2462

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	73.65	62.72	74.00	-11.28 Peak
2	2483.597	-10.93	78.38	67.45	74.00	-6.55 Peak


Right Band edge_Horizontal_Average_802.11n-HT40

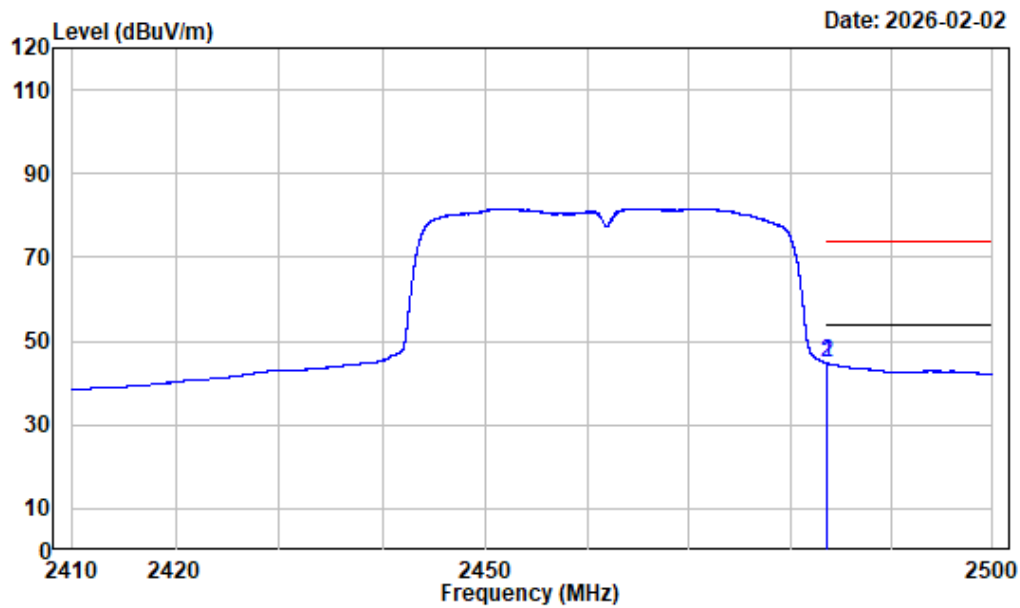

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_n40_2462

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	55.74	44.81	54.00	-9.19	Average
2 2483.530	-10.93	55.75	44.82	54.00	-9.18	Average


Right Band edge_Vertical_802.11n-HT40

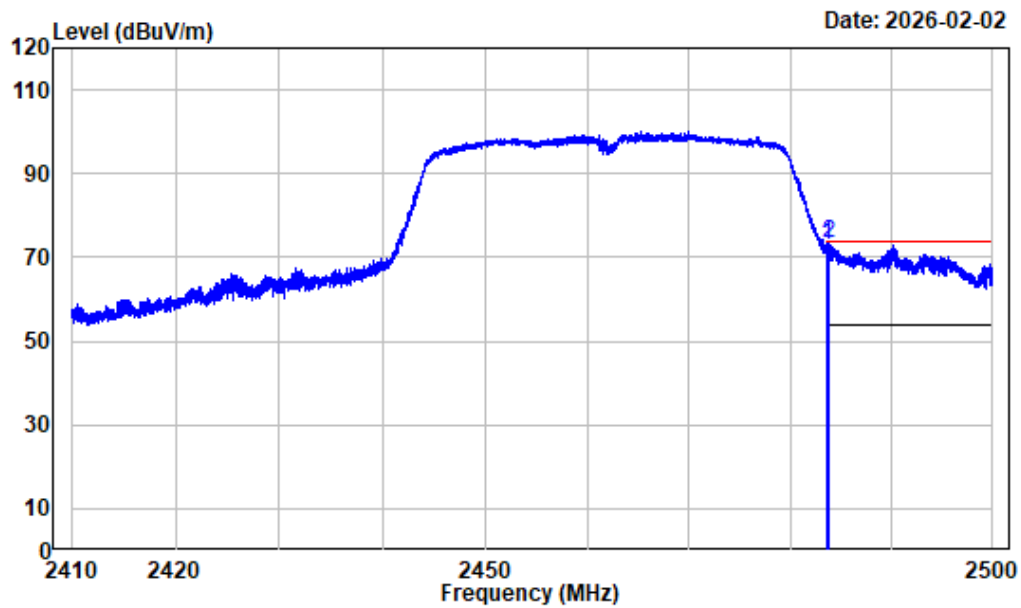

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2462

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	83.65	72.72	74.00	-1.28	Peak
2 2483.721	-10.93	84.32	73.39	74.00	-0.61	Peak

Right Band edge_Vertical_Average_802.11n-HT40

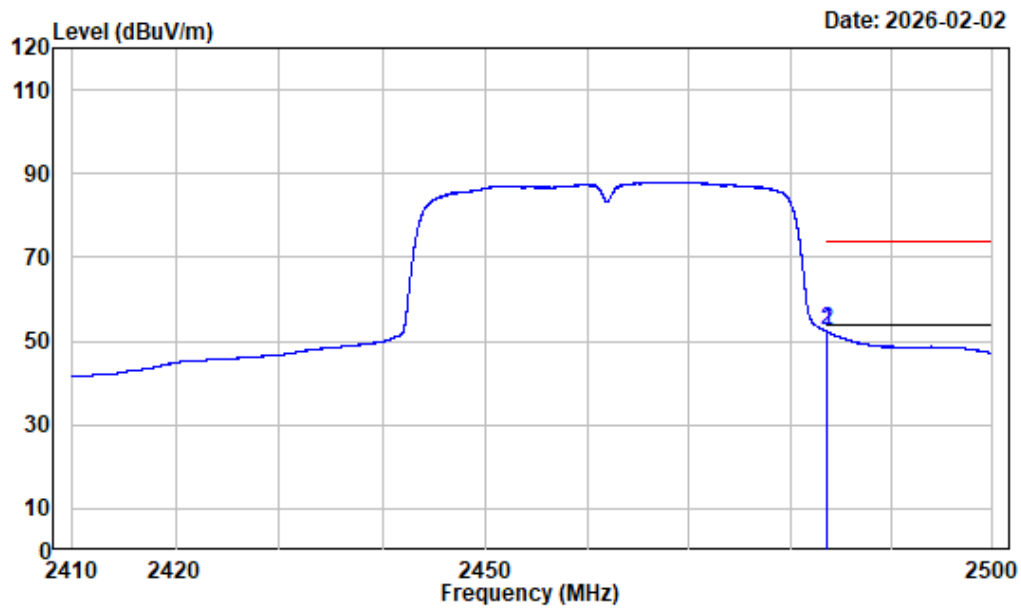


Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 2.4GWiFi_n40_2462

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	63.31	52.38	54.00	-1.62	Average
2	2483.519	-10.93	63.32	52.39	54.00	-1.61	Average

1-18GHz (Listed with the worst case test plot)


1-4GHz_Horizontal_802.11b_2472MHz

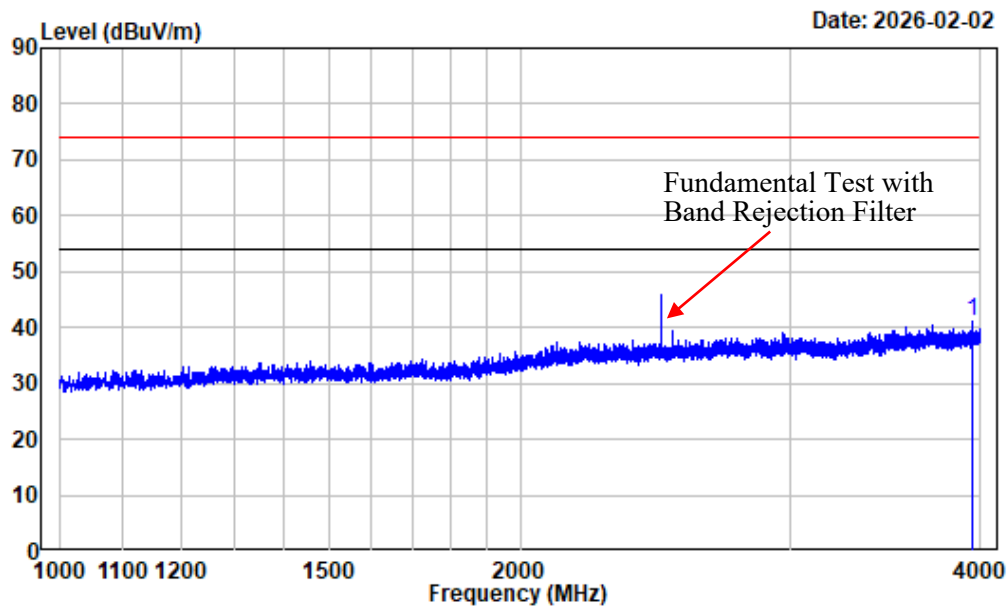

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3952.750	-8.29	49.27	40.98	74.00	-33.02 Peak


1-4GHz_Vertical_802.11b_2472MHz

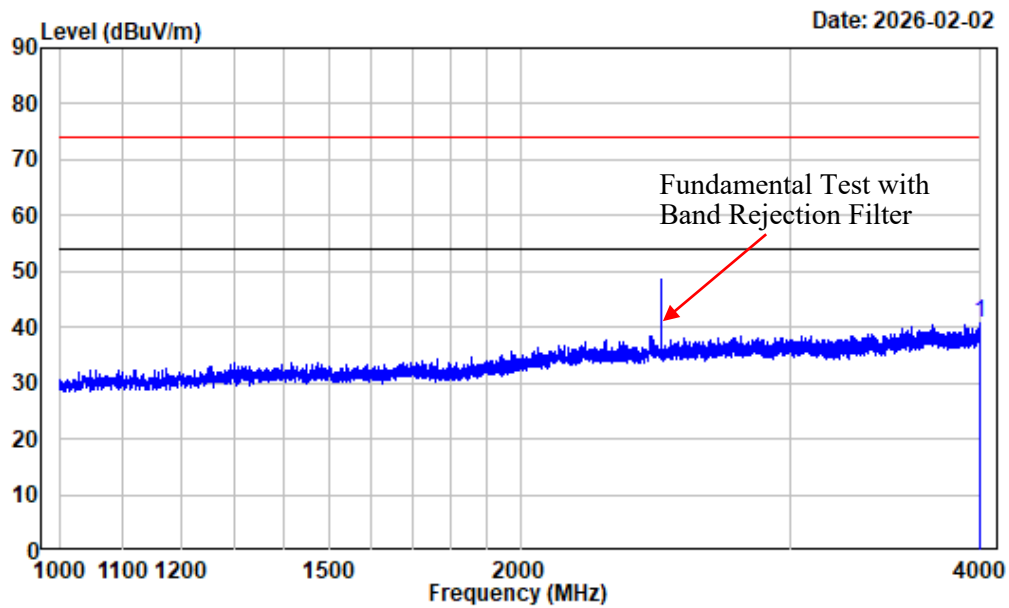

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3991.750	-8.24	49.11	40.87	74.00	-33.13	Peak


4-18GHz_Horizontal_Peak_802.11b_2472MHz

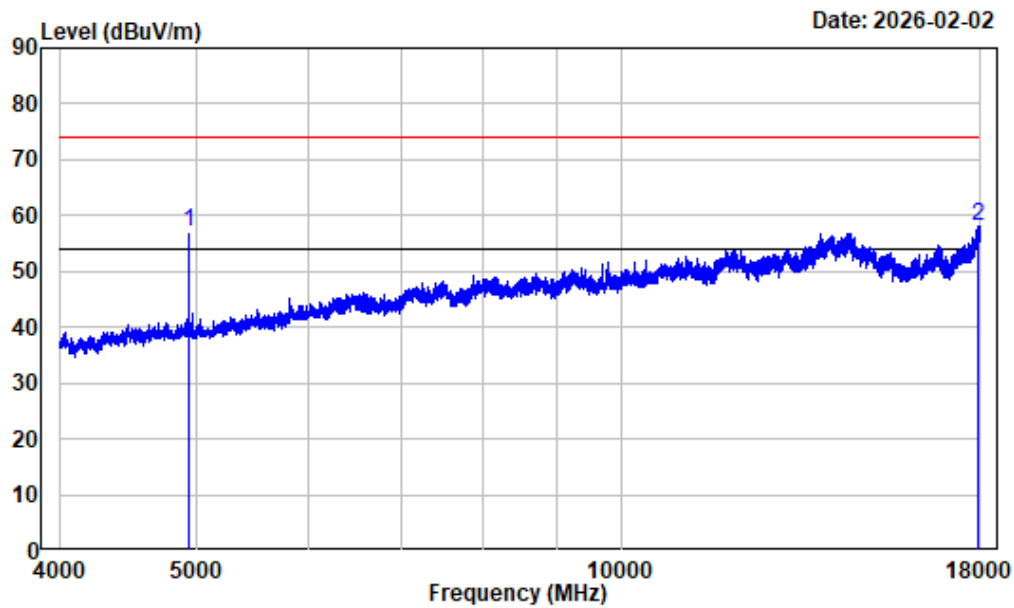

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	64.71	57.07	74.00	-16.93	Peak
2 17912.500	9.15	48.86	58.01	74.00	-15.99	Peak


4-18GHz_Horizontal_Average_802.11b_2472MHz

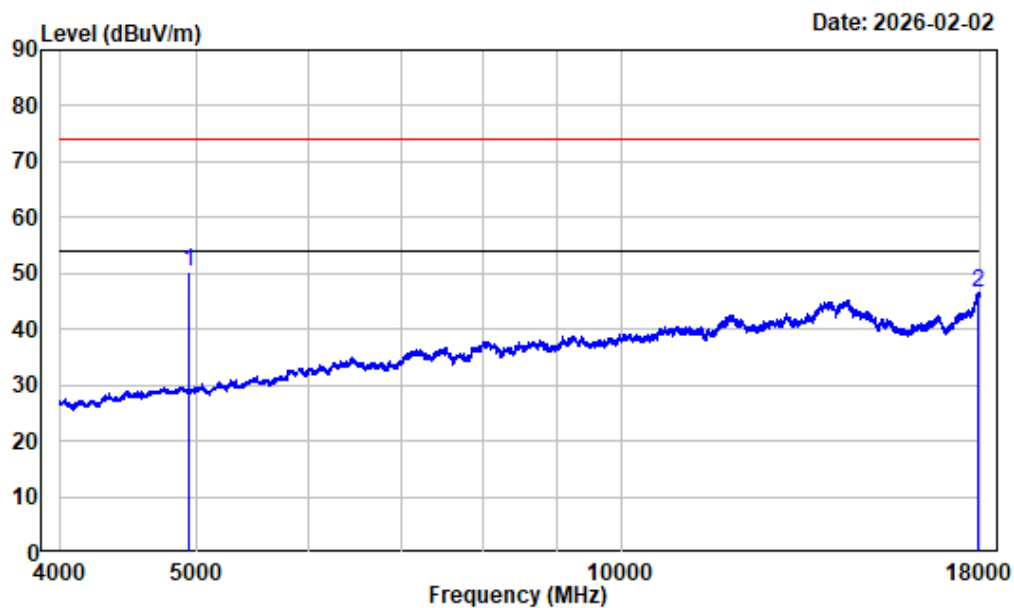

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	57.86	50.22	54.00	-3.78	Average
2 17942.250	9.30	37.34	46.64	54.00	-7.36	Average


4-18GHz_Vertical_Peak_802.11b_2472MHz

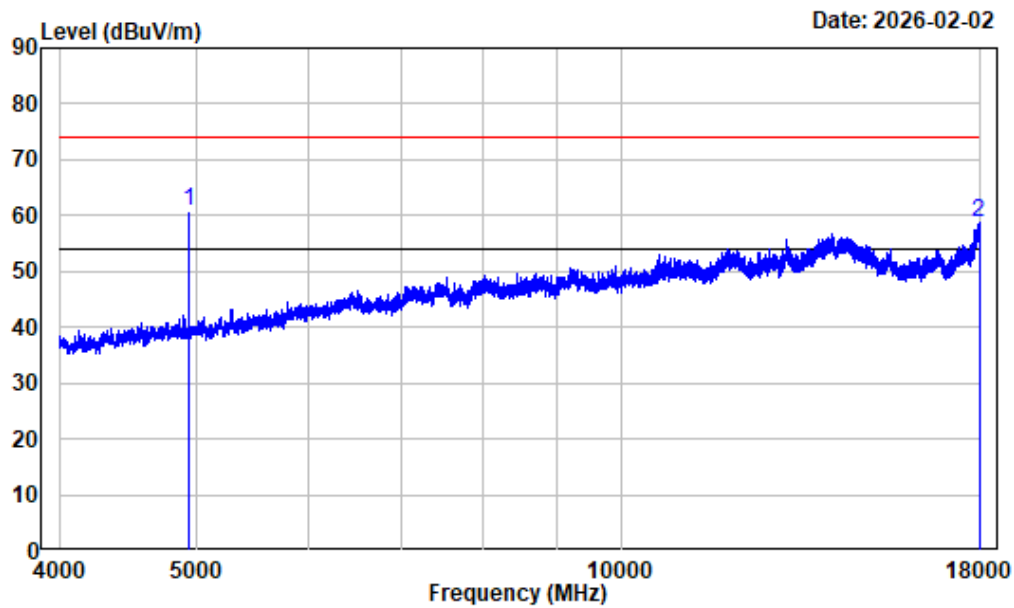

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	68.53	60.89	74.00	-13.11	Peak
2 17956.250	9.35	49.30	58.65	74.00	-15.35	Peak


4-18GHz_Vertical_Average_802.11b_2472MHz

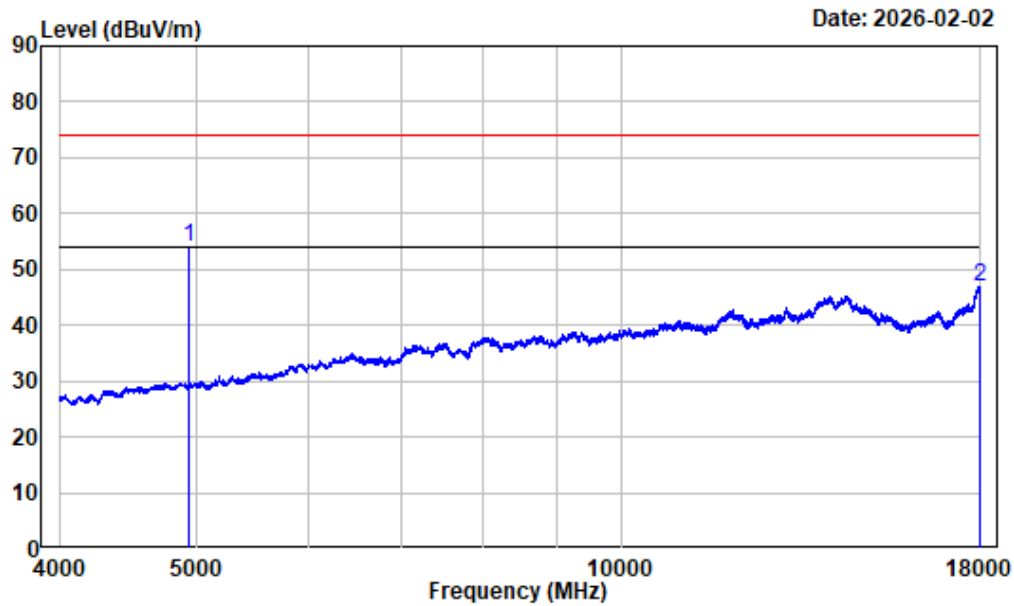

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	61.51	53.87	54.00	-0.13	Average
2 17989.500	9.52	37.26	46.78	54.00	-7.22	Average


1-4GHz_Horizontal_802.11g_2472MHz

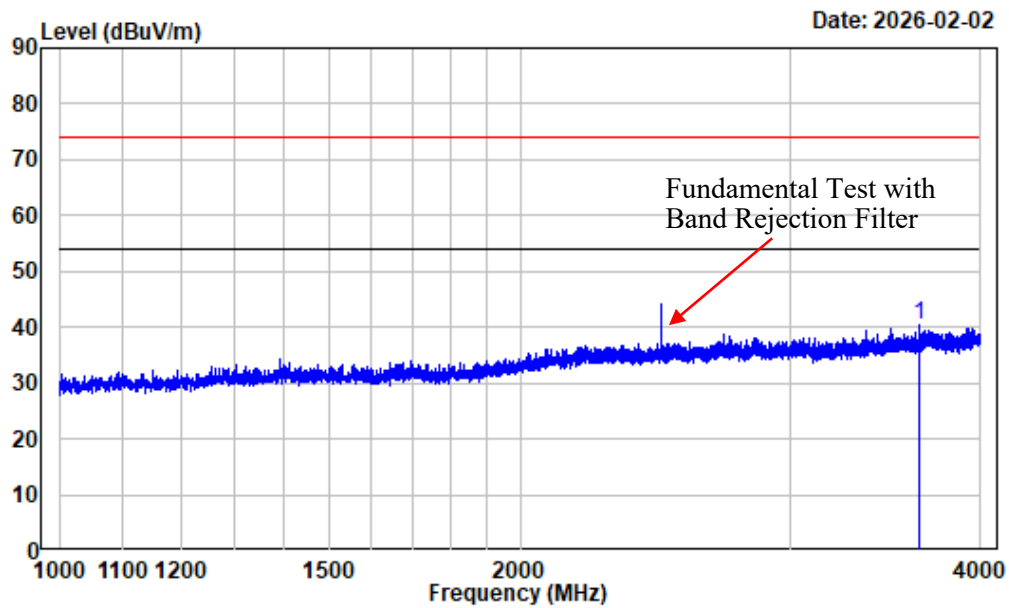

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2472

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3649.750	-8.87	49.29	40.42	74.00	-33.58 Peak


1-4GHz_Vertical_802.11g_2472MHz

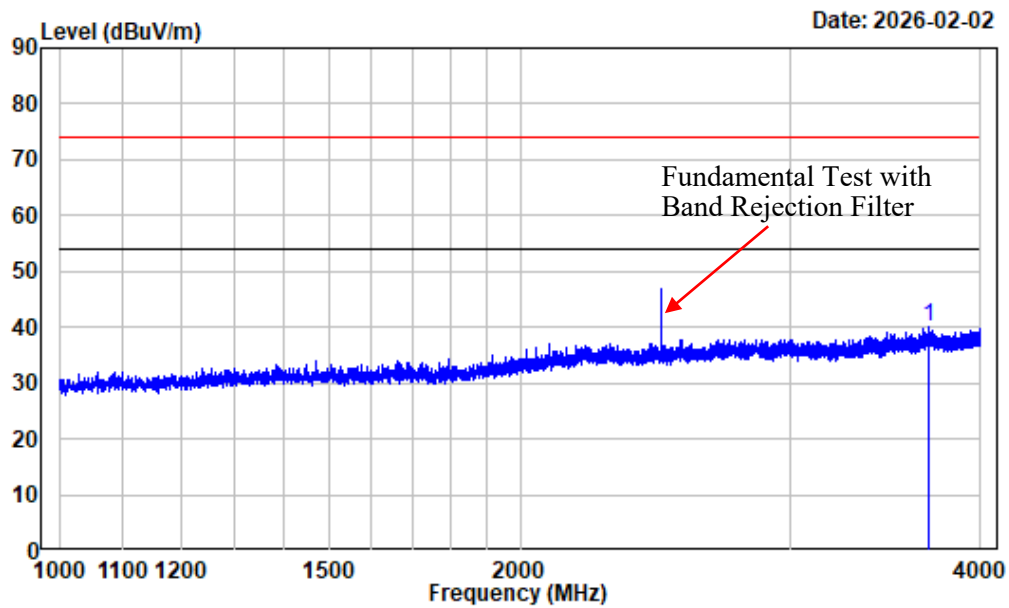

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2472

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3704.500	-8.51	48.53	40.02	74.00	-33.98	Peak


4-18GHz_Horizontal_Peak_802.11g_2472MHz

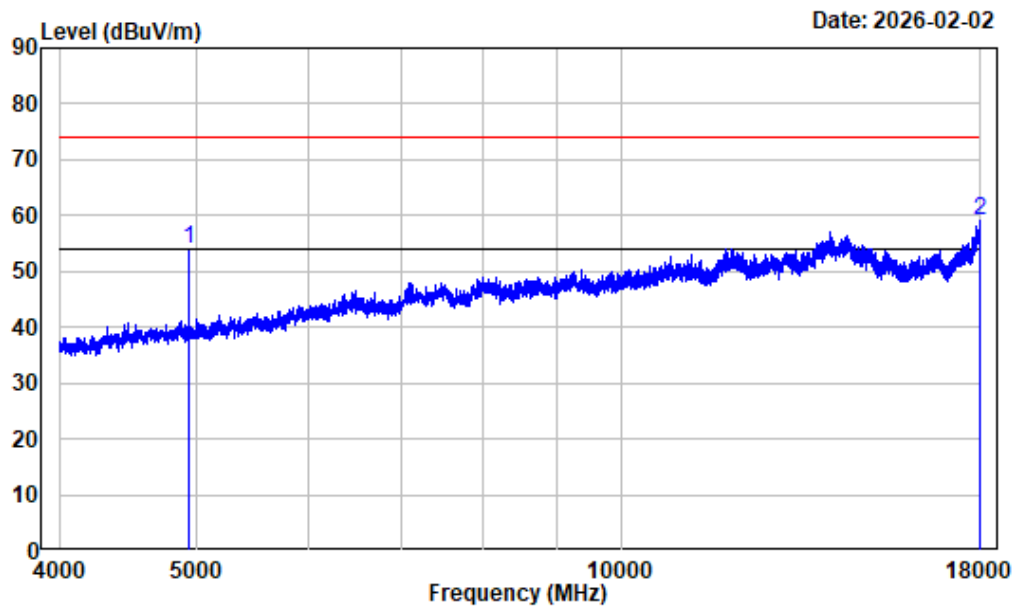

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2472

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	61.71	54.07	74.00	-19.93	Peak
2 17986.000	9.49	49.51	59.00	74.00	-15.00	Peak


4-18GHz_Horizontal_Average_802.11g_2472MHz

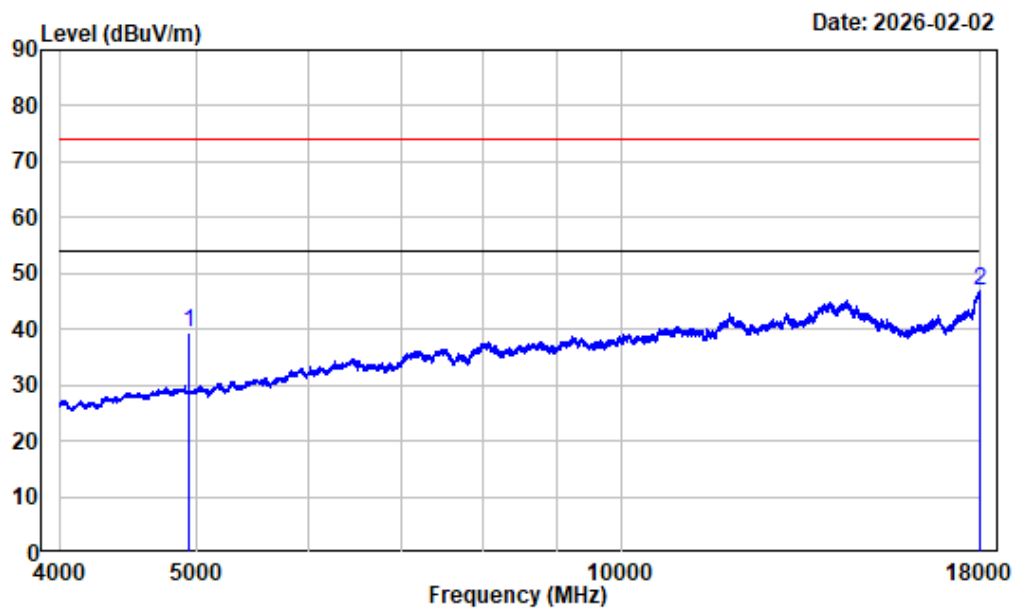

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_g_2472

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	46.94	39.30	54.00	-14.70	Average
2 17998.250	9.55	37.34	46.89	54.00	-7.11	Average


4-18GHz_Vertical_Peak_802.11g_2472MHz

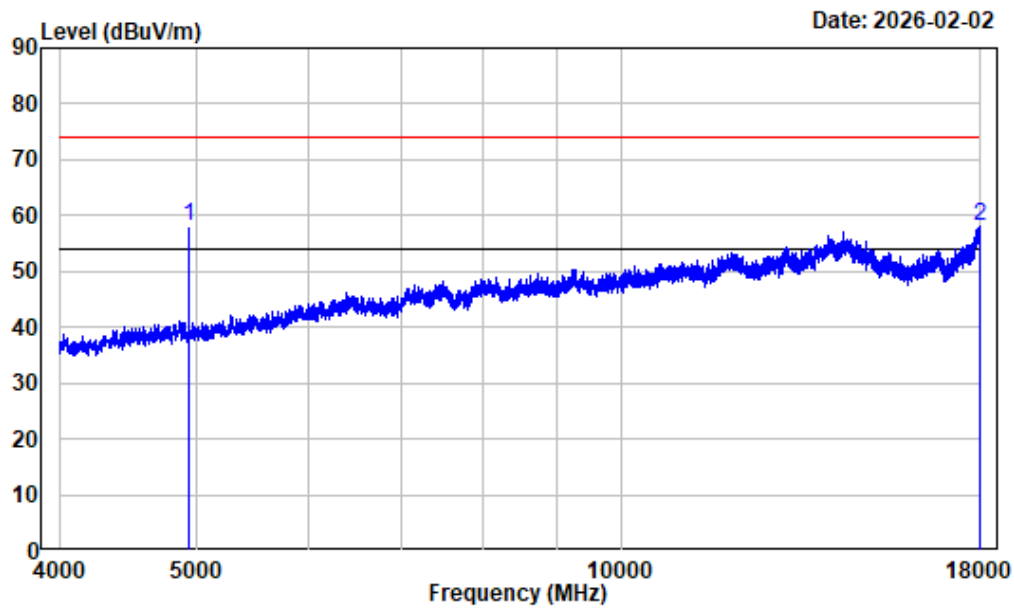

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2472

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	65.87	58.23	74.00	-15.77	Peak
2 17975.500	9.45	48.70	58.15	74.00	-15.85	Peak


4-18GHz_Vertical_Average_802.11g_2472MHz

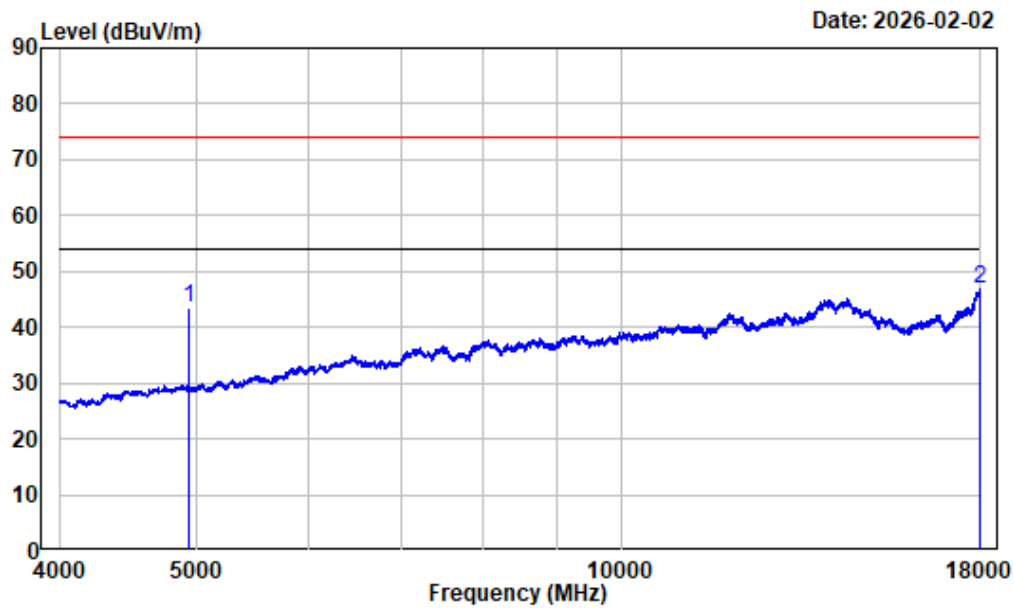

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_g_2472

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	50.99	43.35	54.00	-10.65	Average
2 17998.250	9.55	37.24	46.79	54.00	-7.21	Average


1-4GHz_Horizontal_802.11n-HT20_2472MHz

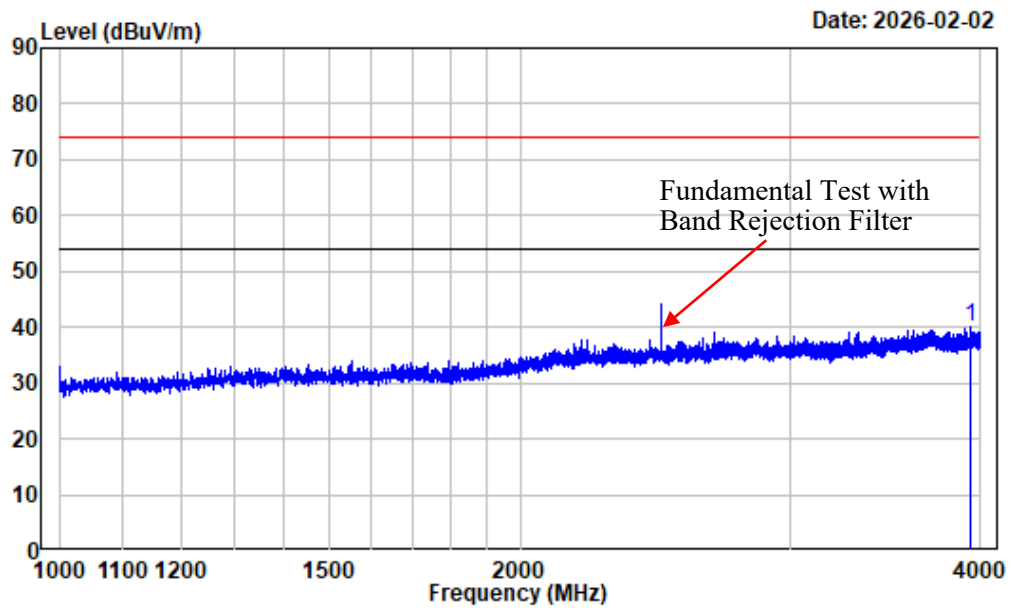

Condition : Horizontal
 Project No. : 2601P11316E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_n20_2472

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3941.875	-8.38	48.52	40.14	74.00	-33.86	Peak


1-4GHz_Vertical_802.11n-HT20_2472MHz

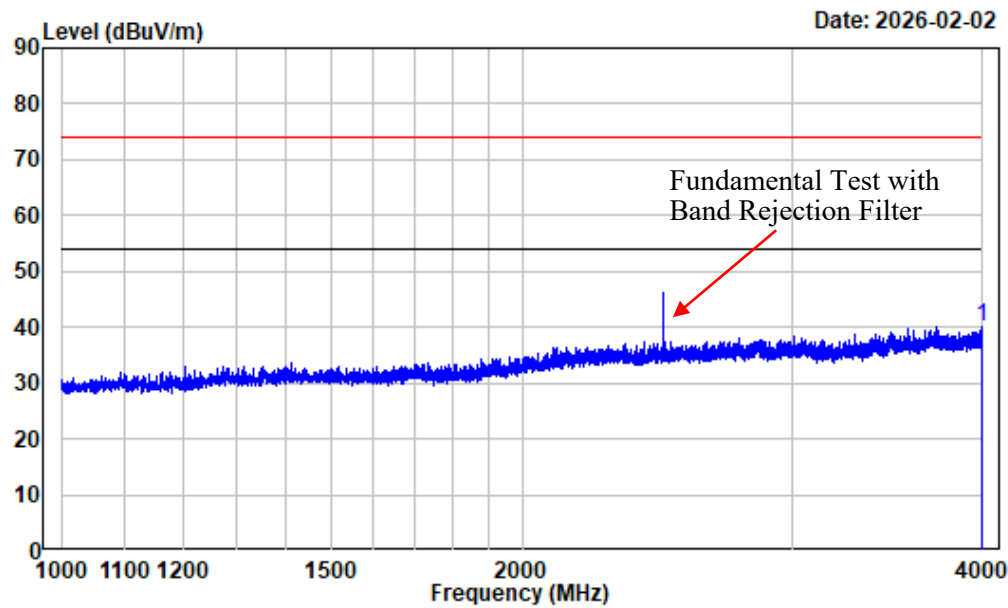

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4WiFi_n20_2472

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3998.875	-8.25	48.27	40.02	74.00	-33.98	Peak


4-18GHz_Horizontal_Peak_802.11n-HT20_2472MHz

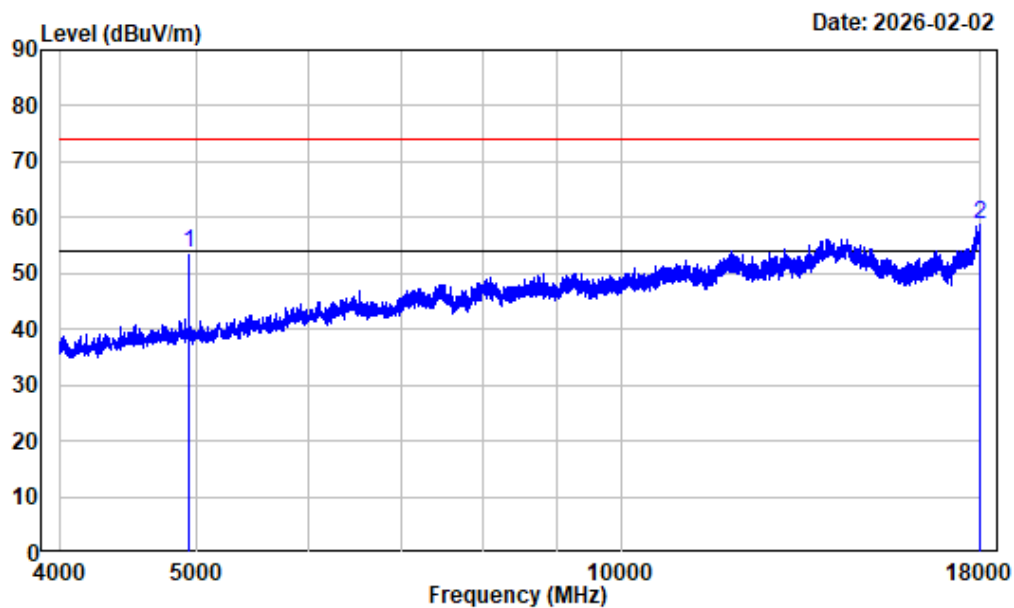

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2472

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	61.20	53.56	74.00	-20.44	Peak
2 17966.750	9.41	49.31	58.72	74.00	-15.28	Peak


4-18GHz_Horizontal_Average_802.11n-HT20_2472MHz

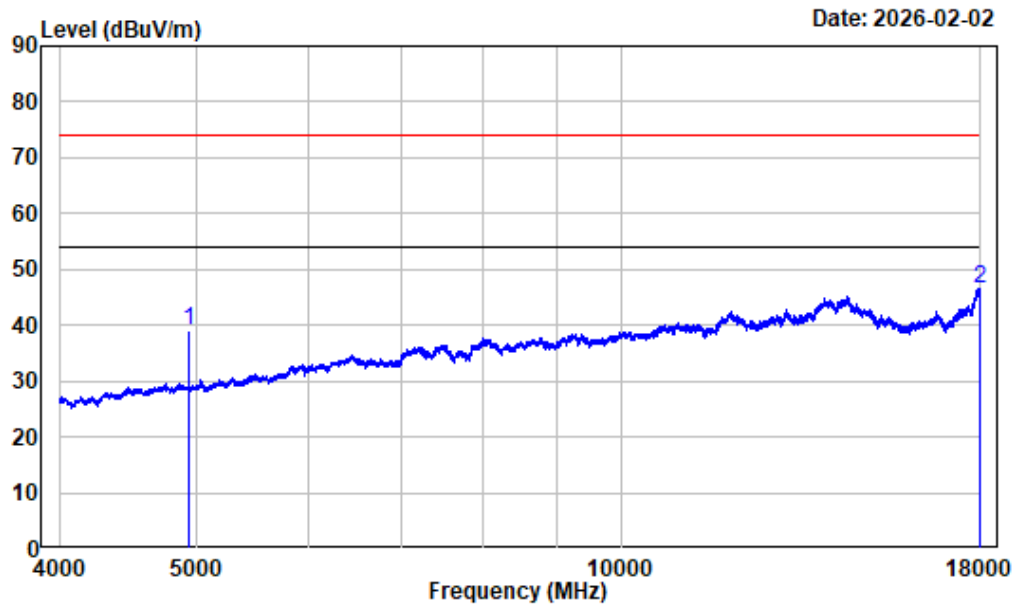

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n20_2472

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	46.74	39.10	54.00	-14.90	Average
2 17989.500	9.52	37.11	46.63	54.00	-7.37	Average


4-18GHz_Vertical_Peak_802.11n-HT20_2472MHz

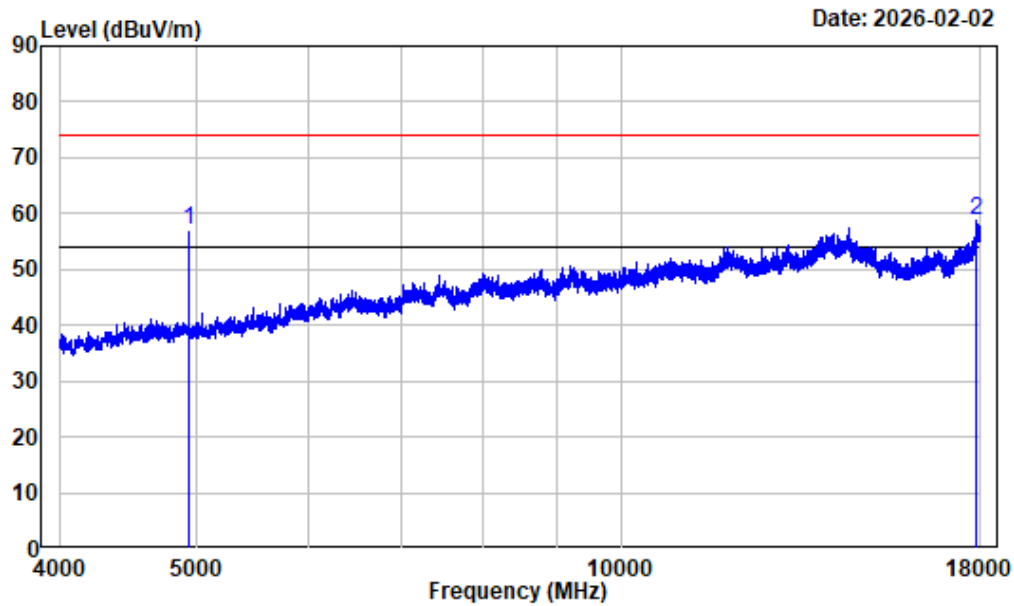

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2472

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	64.71	57.07	74.00	-16.93	Peak
2 17879.250	8.71	50.21	58.92	74.00	-15.08	Peak


4-18GHz_Vertical_Average_802.11n-HT20_2472MHz

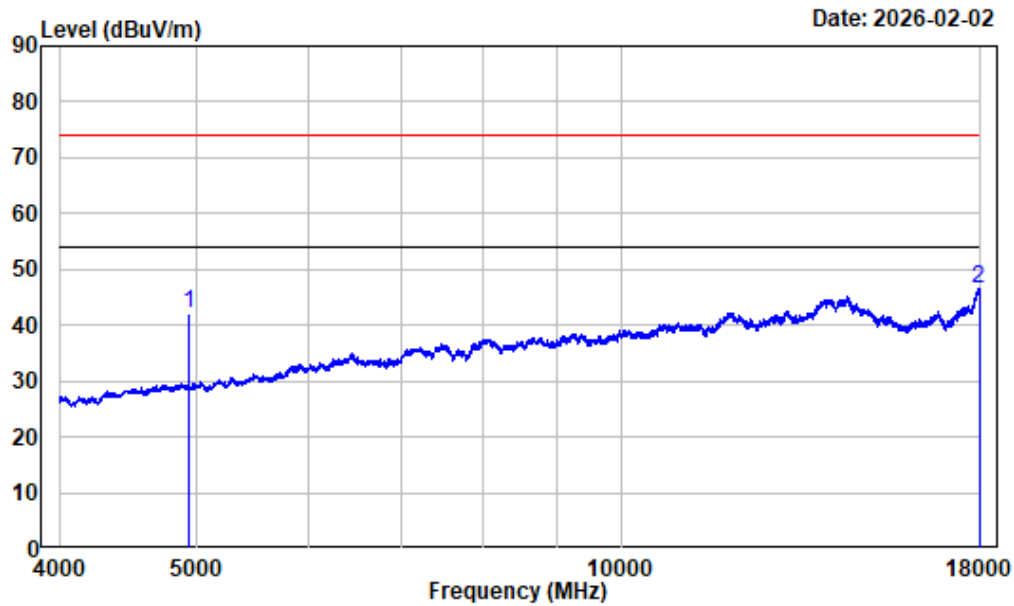

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n20_2472

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4944.000	-7.64	49.92	42.28	54.00	-11.72	Average
2 17956.250	9.35	37.31	46.66	54.00	-7.34	Average


1-4GHz_Horizontal_802.11n-HT40_2462MHz

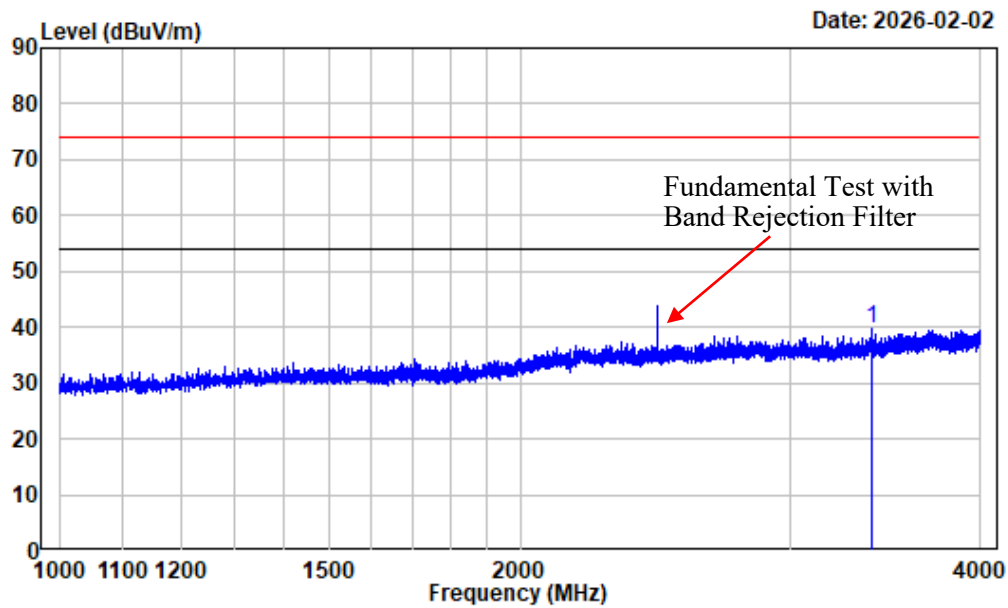

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2462

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3400.375	-9.50	49.13	39.63	74.00	-34.37 Peak


1-4GHz_Vertical_802.11n-HT40_2462MHz

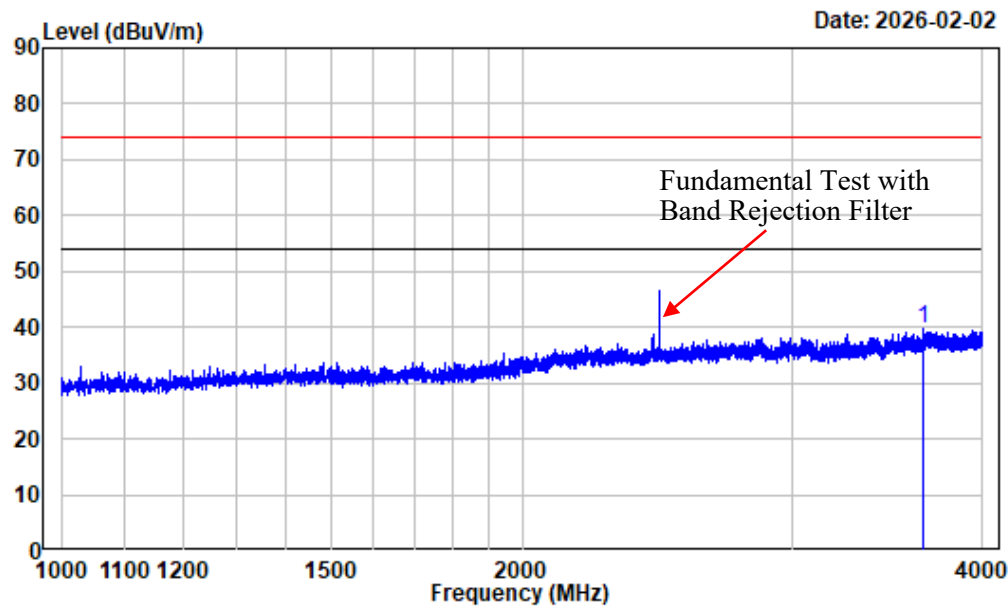

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2462

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 3663.250	-8.77	48.35	39.58	74.00	-34.42 Peak


4-18GHz_Horizontal_Peak_802.11n-HT40_2462MHz

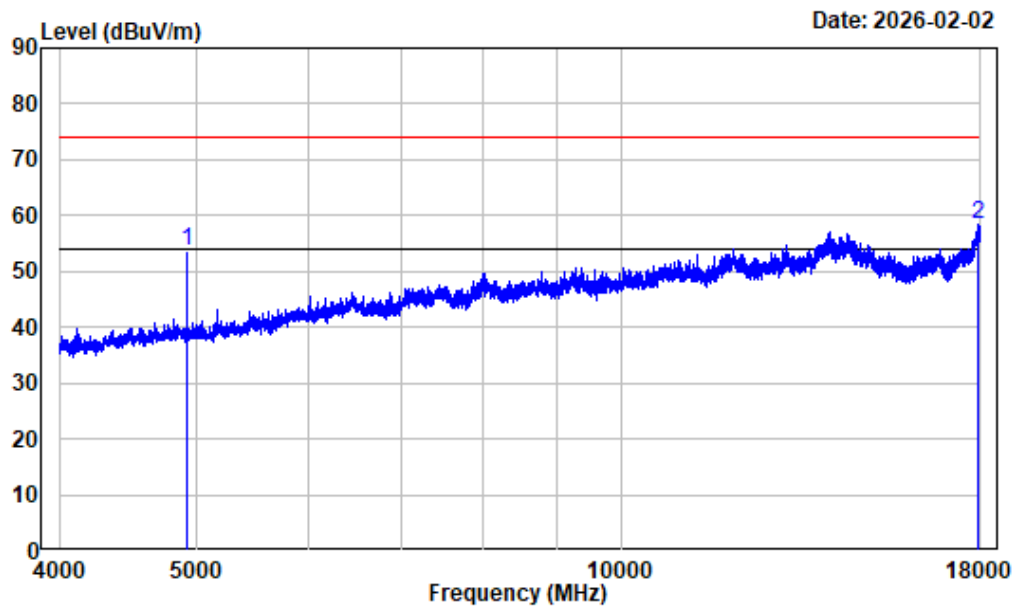

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2462

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-7.62	61.14	53.52	74.00	-20.48 Peak
2	17942.250	9.30	49.09	58.39	74.00	-15.61 Peak


4-18GHz_Horizontal_Average_802.11n-HT40_2462MHz

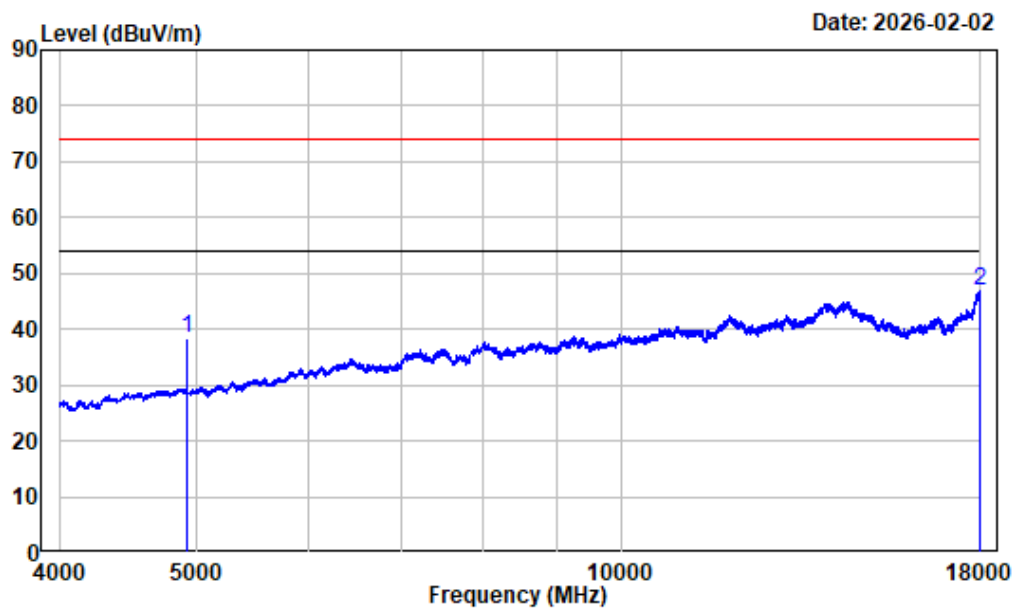

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n40_2462

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4924.000	-7.62	46.14	38.52	54.00	-15.48	Average
2 17998.250	9.55	37.15	46.70	54.00	-7.30	Average


4-18GHz_Vertical_Peak_802.11n-HT40_2462MHz

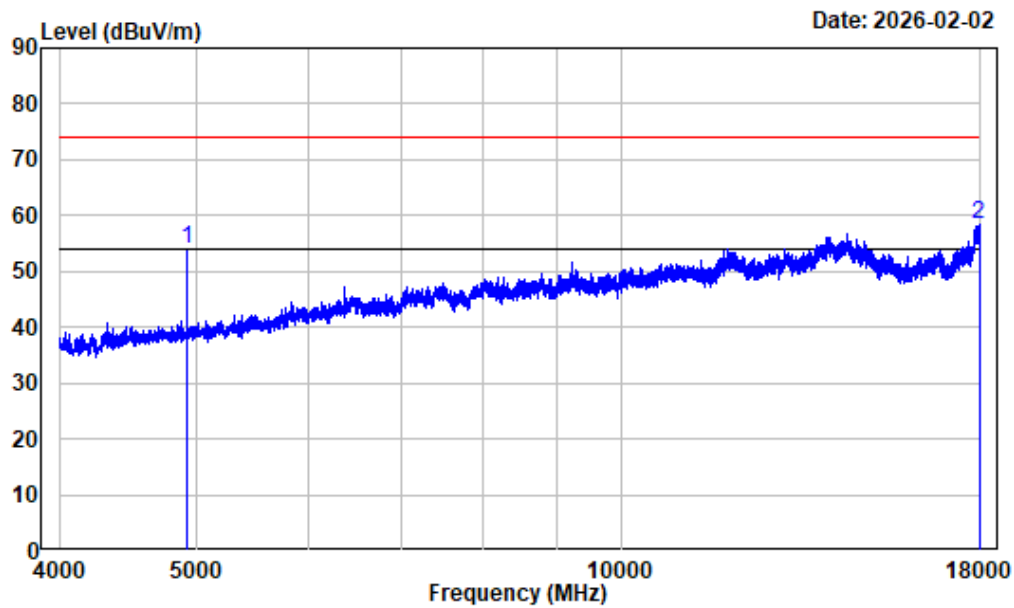

Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2462

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4924.000	-7.62	61.70	54.08	74.00	-19.92	Peak
2 17956.250	9.35	48.90	58.25	74.00	-15.75	Peak

4-18GHz_Vertical_Average_802.11n-HT40_2462MHz

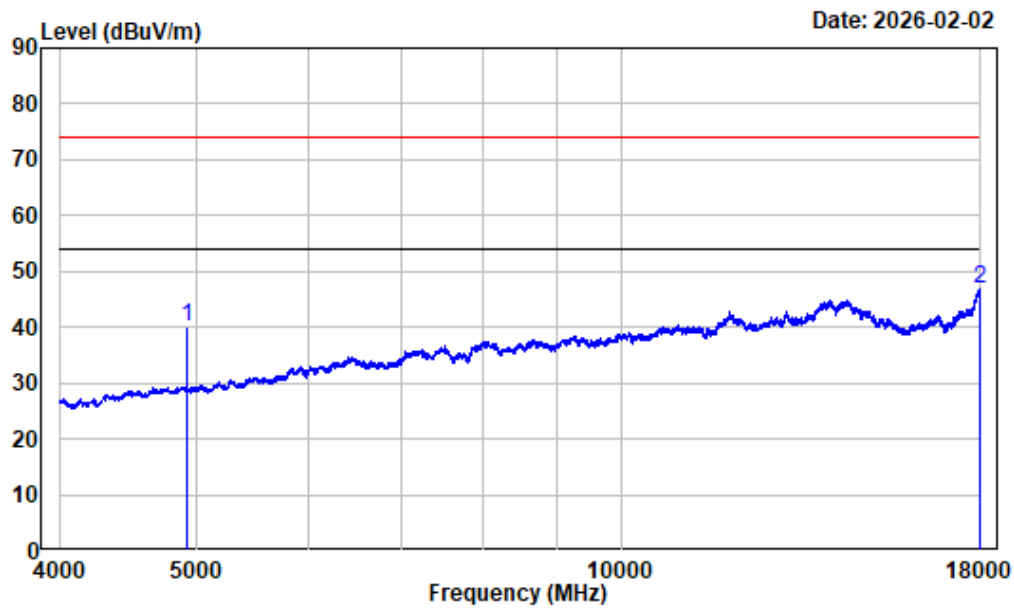


Condition : Vertical
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n40_2462

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4924.000	-7.62	47.60	39.98	54.00	-14.02	Average
2 17994.750	9.53	37.36	46.89	54.00	-7.11	Average

18-25GHz (Only Listed with the worst margin test plot)


18-25GHz_Horizontal_802.11b_2472MHz

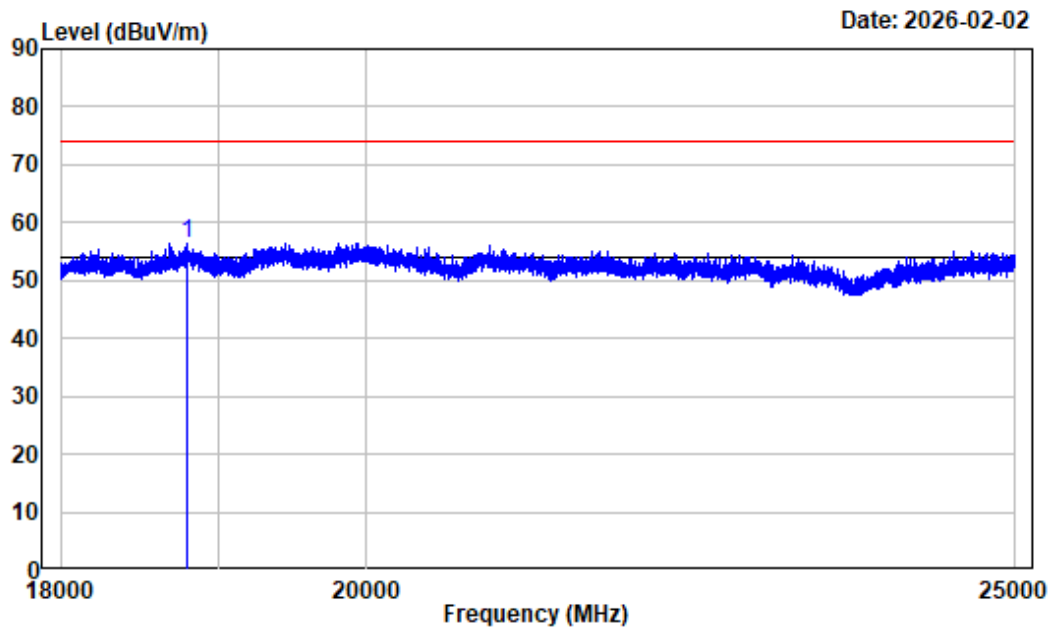

Condition : Horizontal
Project No. : 2601P11316E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2472

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 18801.500	16.87	39.62	56.49	74.00	-17.51 Peak


18-25GHz_Horizontal_Average_802.11b_2472MHz

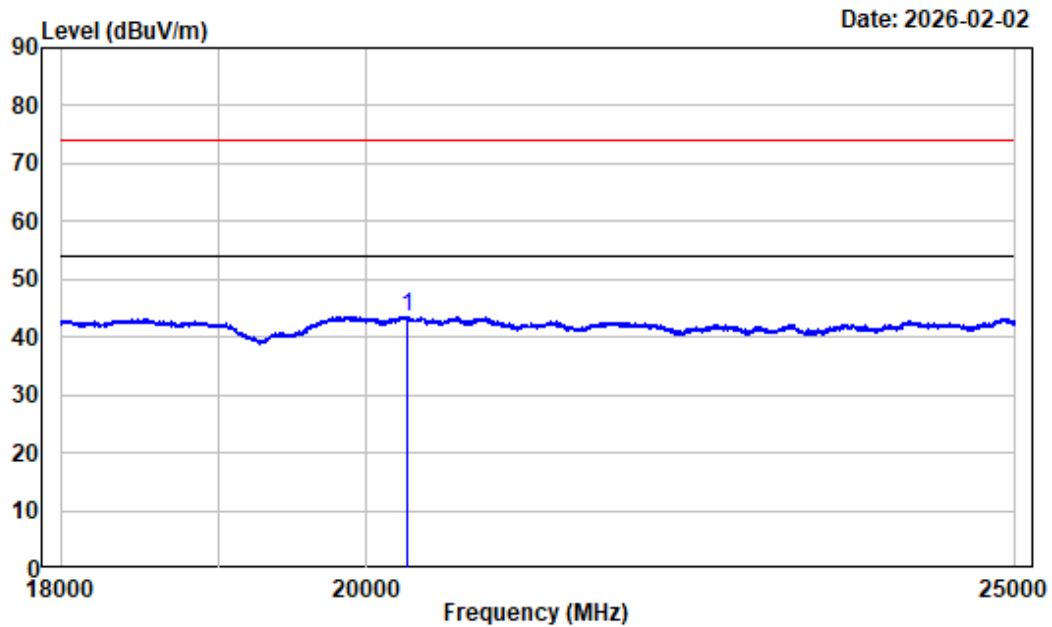

Condition : Horizontal
 Project No. : 2601P11316E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : 2.4GWiFi_b_2472

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 20281.130	17.91	25.72	43.63	54.00	-10.37	Average


18-25GHz_Vertical_802.11b_2472MHz

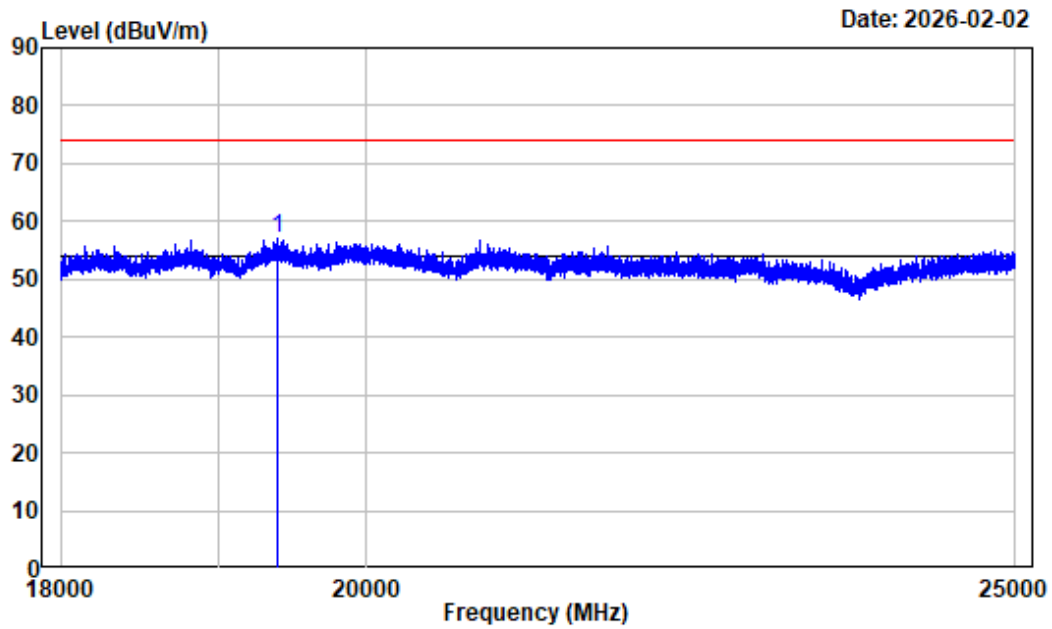

Condition : Vertical
 Project No. : 2601P11316E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_b_2472

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	
1 19399.130	17.31	39.63	56.94	74.00	-17.06 Peak

18-25GHz_Vertical_Average_802.11b_2472MHz

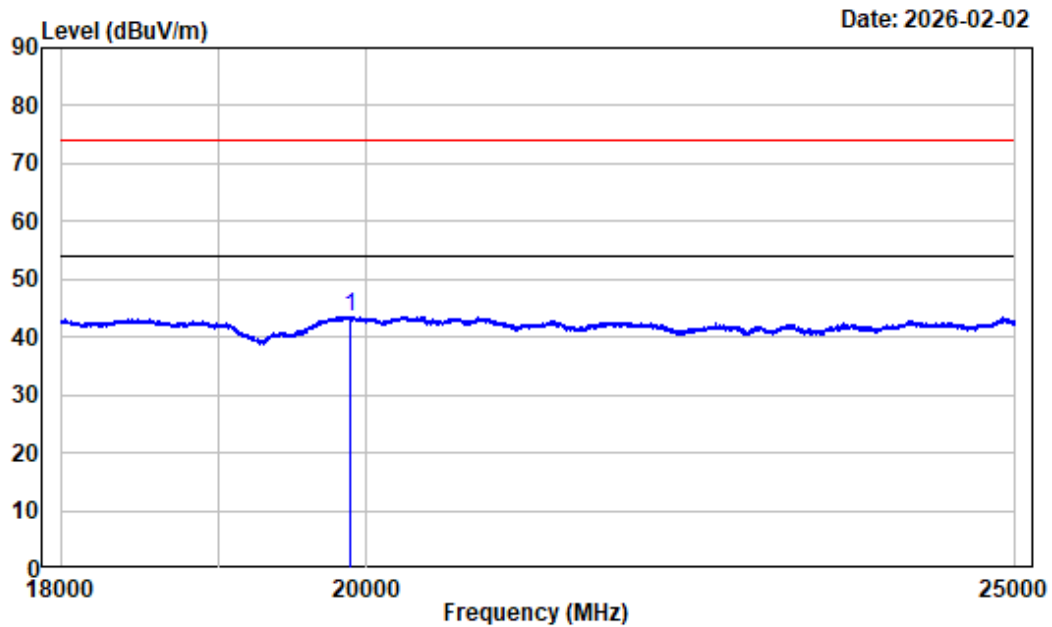

Condition : Vertical
 Project No. : 2601P11316E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : 2.4GWiFi_b_2472

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19883.880	17.78	25.80	43.58	54.00	-10.42	Average

6dB Emission Bandwidth**Test Information:**

Sample No.:	3G8T-5	Test Date:	2026/02/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	Pass


Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Data:


Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11b	2412	9.209	≥ 0.5	Pass
	2442	9.209	≥ 0.5	Pass
	2472	9.089	≥ 0.5	Pass
802.11g	2412	16.457	≥ 0.5	Pass
	2442	16.497	≥ 0.5	Pass
	2472	16.376	≥ 0.5	Pass
802.11n20	2412	17.257	≥ 0.5	Pass
	2442	17.217	≥ 0.5	Pass
	2472	17.257	≥ 0.5	Pass
802.11n40	2422	35.716	≥ 0.5	Pass
	2442	35.556	≥ 0.5	Pass
	2462	35.476	≥ 0.5	Pass

802.11b_2412MHz

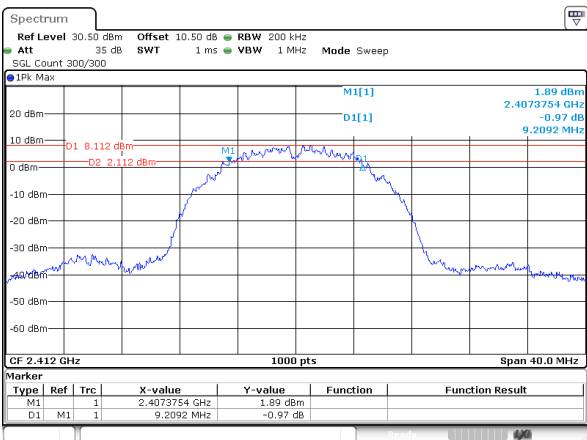


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:05:59

802.11b_2442MHz

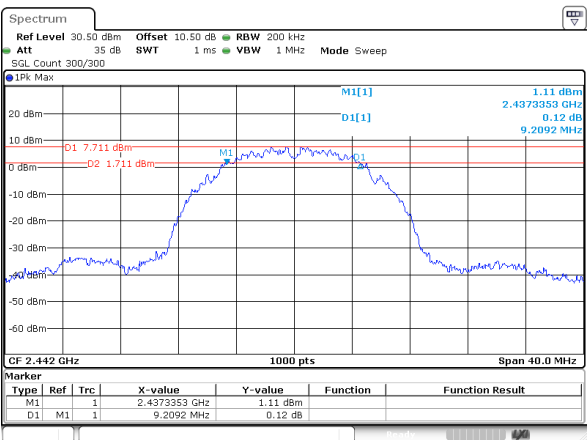


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:10:00

802.11b_2472MHz

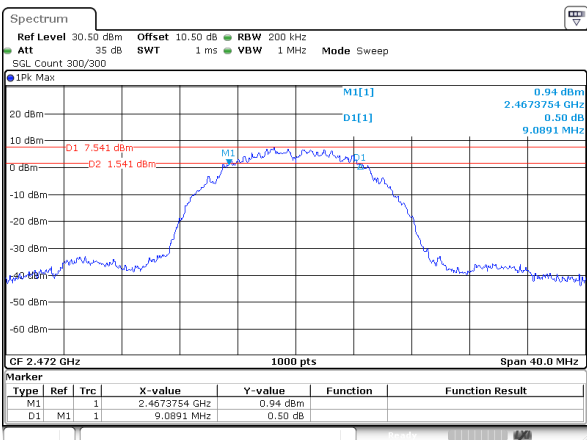


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:11:15

802.11g_2412MHz

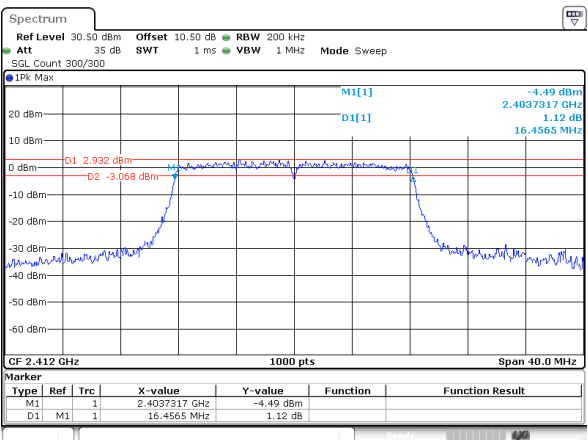


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:13:03

802.11g_2442MHz

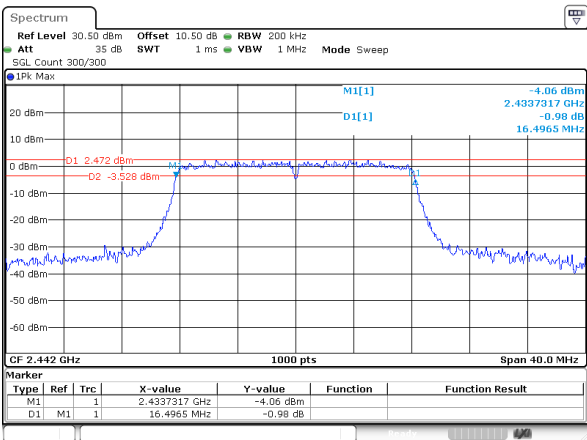


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:14:42

802.11g_2472MHz

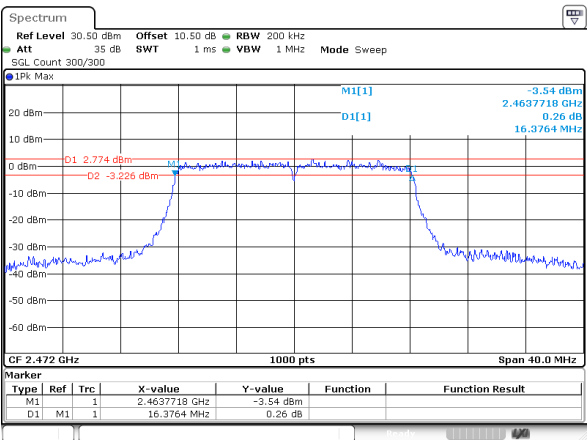


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:16:18

802.11n20_2412MHz

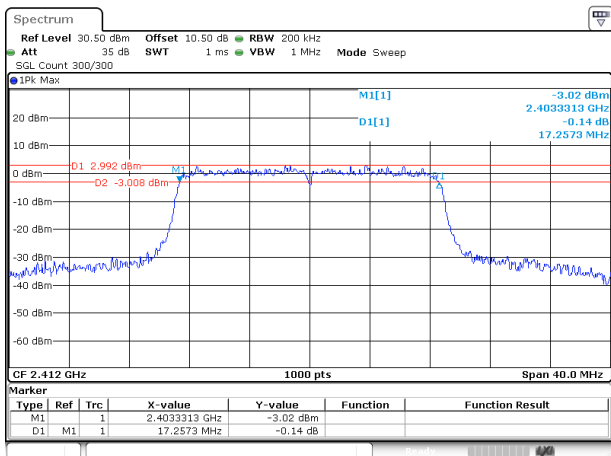


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:18:16

802.11n20_2442MHz

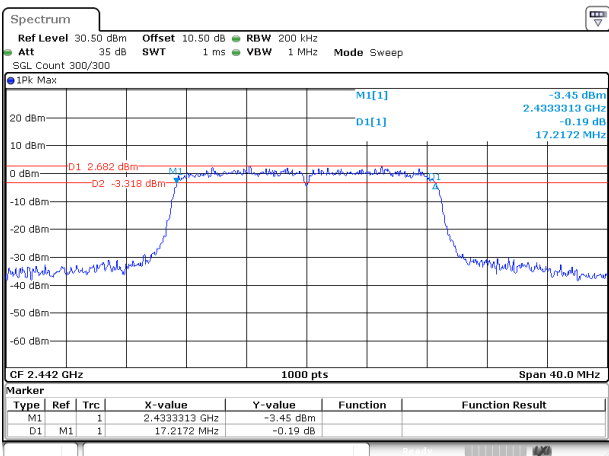


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:24:32

802.11n20_2472MHz

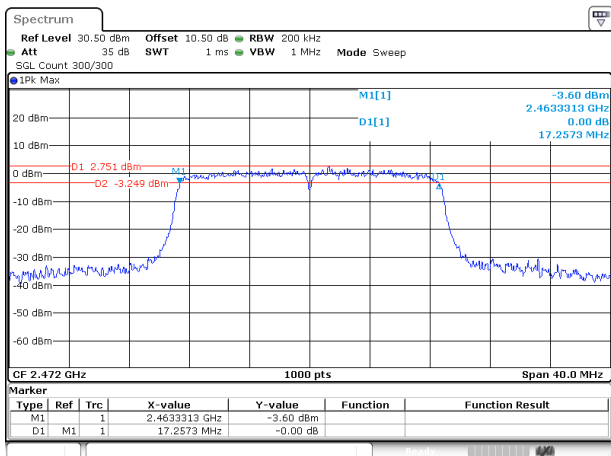


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:25:51

802.11n40_2422MHz

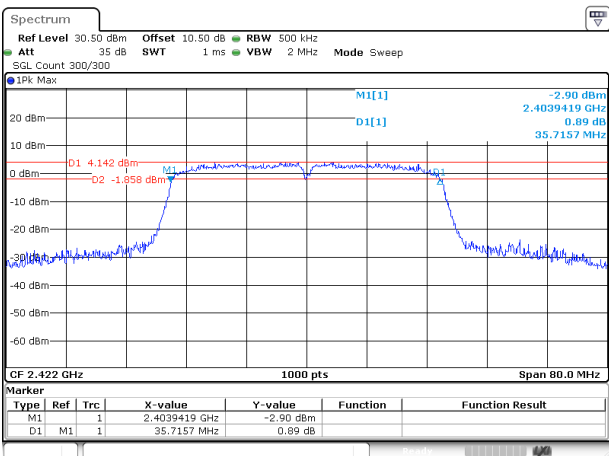


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:27:22

802.11n40_2442MHz

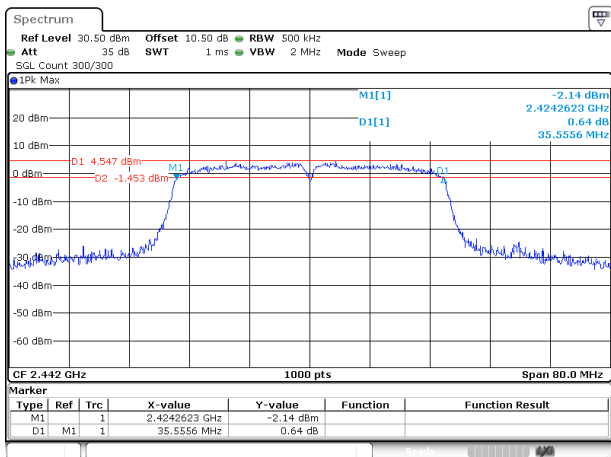

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:28:42

802.11n40_2462MHz

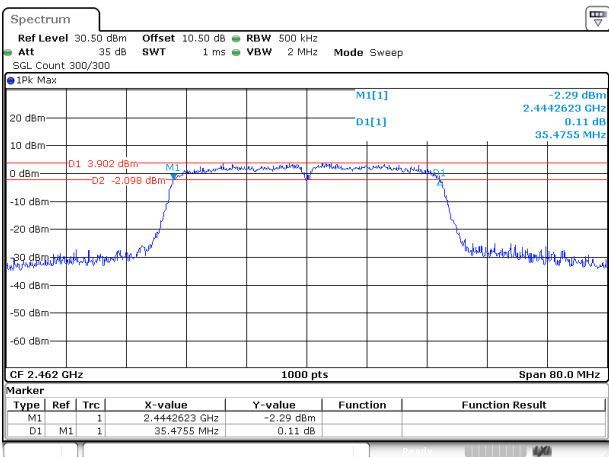

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:29:47

99% Occupied Bandwidth**Test Information:**

Sample No.:	3G8T-5	Test Date:	2026/02/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	N/A


Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Data:


Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11b	2412	12.840
	2442	12.760
	2472	12.680
802.11g	2412	16.400
	2442	16.440
	2472	16.440
802.11n20	2412	17.360
	2442	17.360
	2472	17.360
802.11n40	2422	35.760
	2442	35.760
	2462	35.840

802.11b_2412MHz

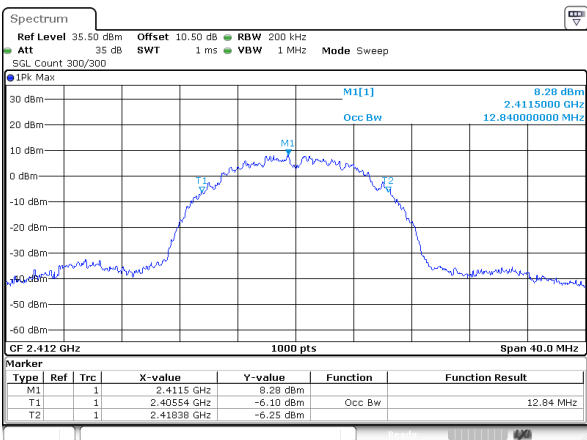


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:06:22

802.11b_2442MHz

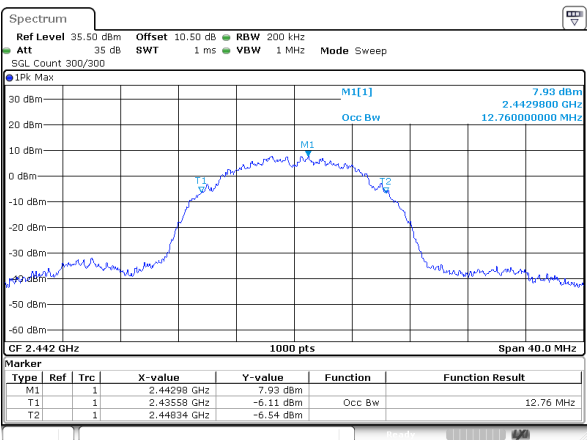


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:10:22

802.11b_2472MHz

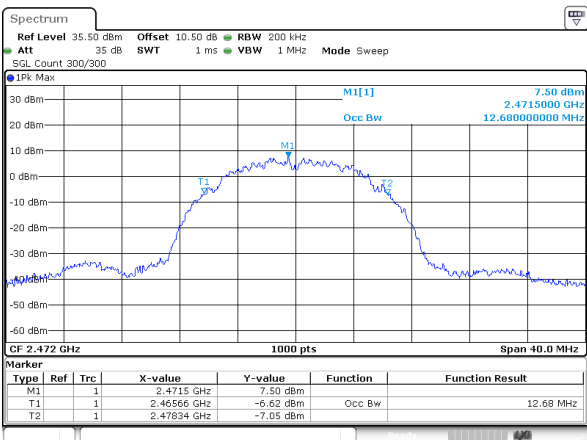


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:11:38

802.11g_2412MHz

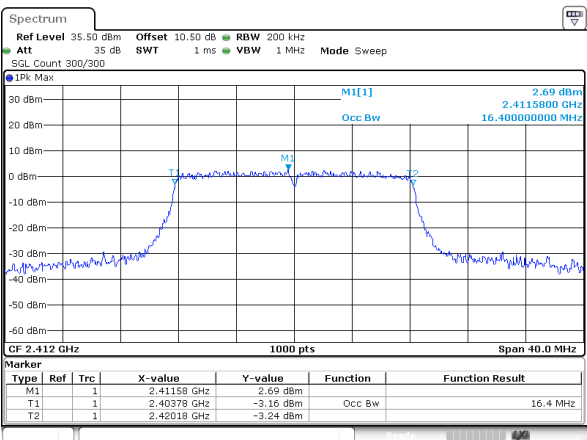


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:13:27

802.11g_2442MHz

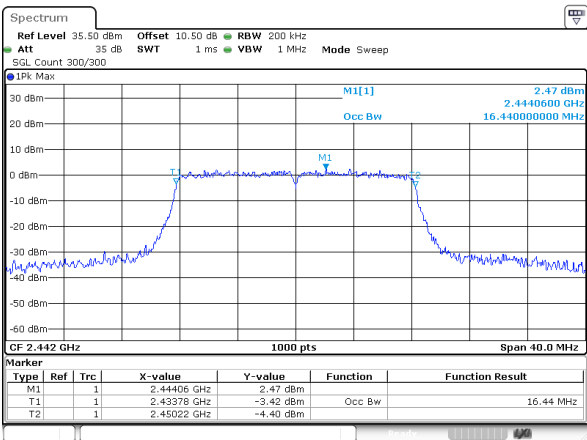


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:15:03

802.11g_2472MHz

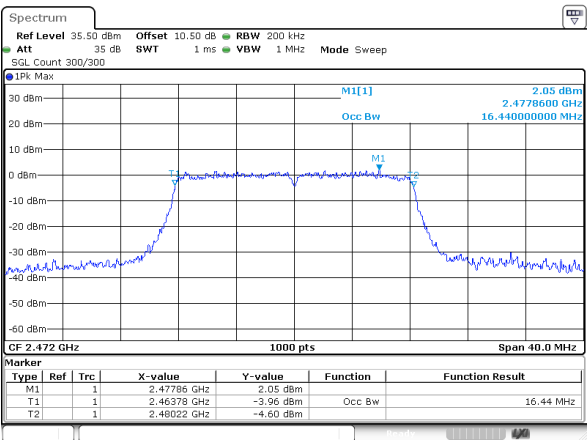


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:16:41

802.11n20_2412MHz

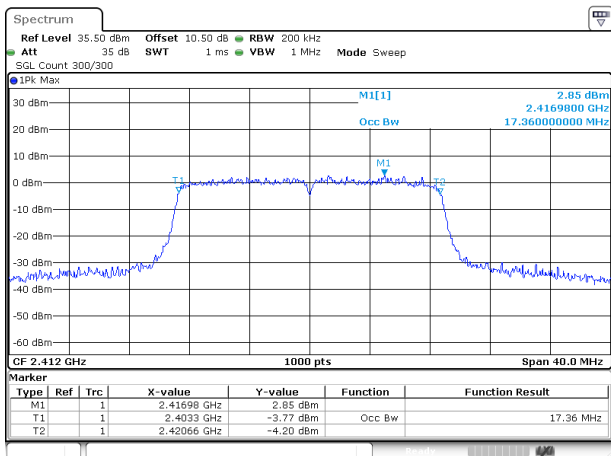


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:18:40

802.11n20_2442MHz

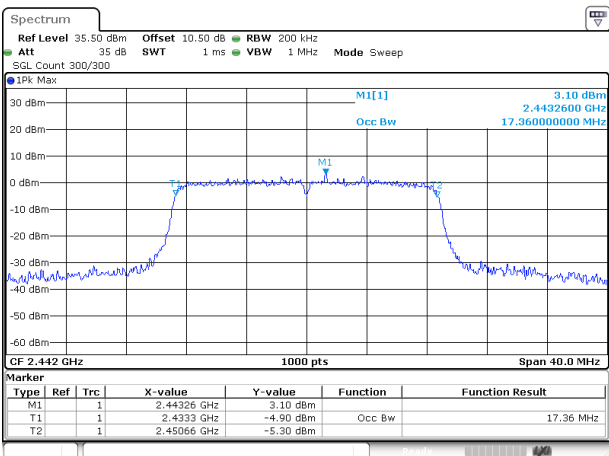


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:24:54

802.11n20_2472MHz

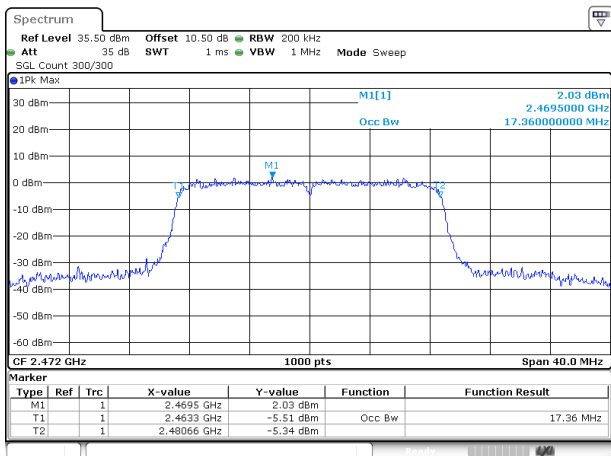


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:26:13

802.11n40_2422MHz

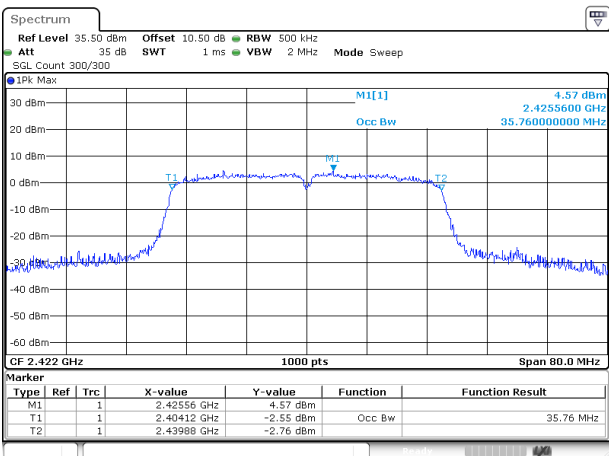


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:27:33

802.11n40_2442MHz

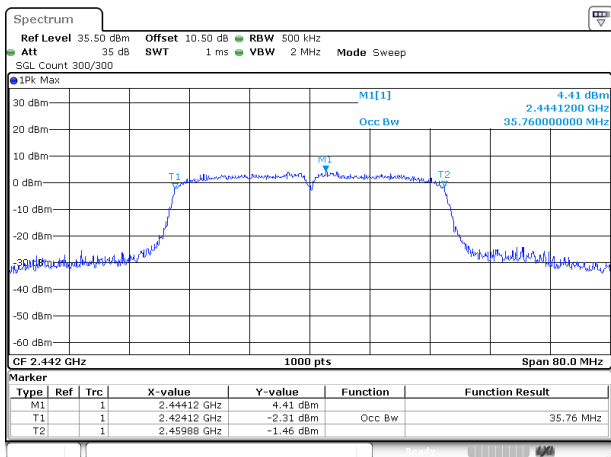

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:28:54

802.11n40_2462MHz

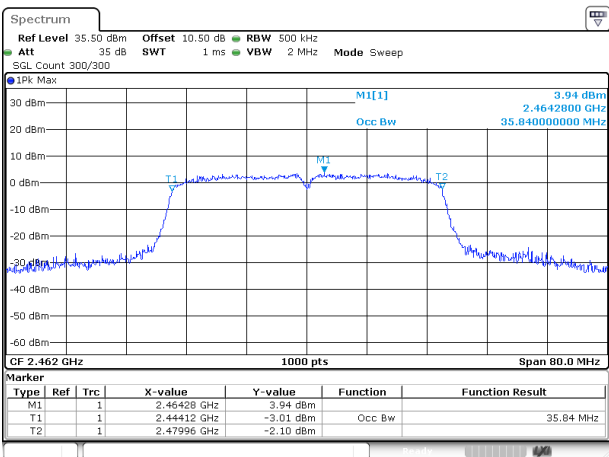

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:29:59

Maximum Conducted Output Power**Test Information:**

Sample No.:	3G8T-5	Test Date:	2026/02/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Data:

Mode	Test Frequency (MHz)	Peak Output Power(dBm)	Limit (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
802.11b	2412	21.34	30	24.94	36	Pass
	2442	21.00	30	24.60	36	Pass
	2472	20.43	30	24.03	36	Pass
802.11g	2412	20.81	30	24.41	36	Pass
	2442	20.52	30	24.12	36	Pass
	2472	20.07	30	23.67	36	Pass
802.11n20	2412	20.68	30	24.28	36	Pass
	2442	20.38	30	23.98	36	Pass
	2472	19.96	30	23.56	36	Pass
802.11n40	2422	21.14	30	24.74	36	Pass
	2442	20.98	30	24.58	36	Pass
	2462	20.84	30	24.44	36	Pass

Power Spectral Density**Test Information:**

Sample No.:	3G8T-5	Test Date:	2026/02/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	Pass


Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Data:


Mode	Test Frequency (MHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	2412	-7.54	8	Pass
	2442	-8.34	8	Pass
	2472	-7.76	8	Pass
802.11g	2412	-12.00	8	Pass
	2442	-12.79	8	Pass
	2472	-12.80	8	Pass
802.11n20	2412	-12.46	8	Pass
	2442	-12.18	8	Pass
	2472	-13.15	8	Pass
802.11n40	2422	-13.86	8	Pass
	2442	-14.46	8	Pass
	2462	-13.89	8	Pass

802.11b_2412MHz

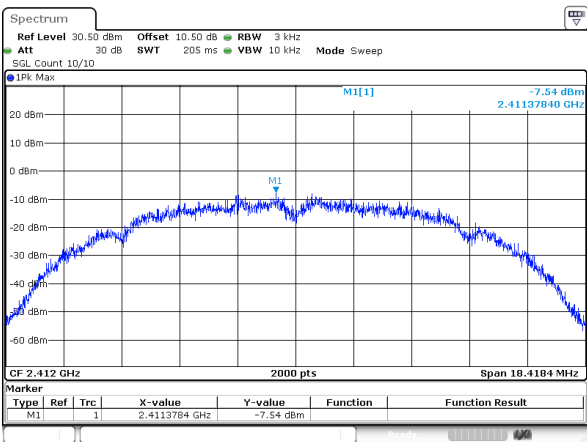


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:58:16

802.11b_2442MHz

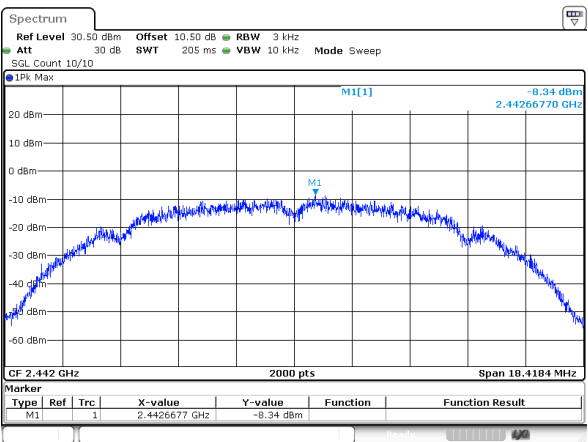


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:57:38

802.11b_2472MHz

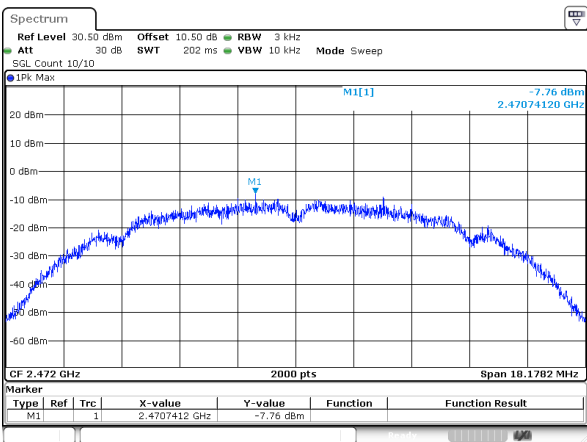


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:12:20

802.11g_2412MHz

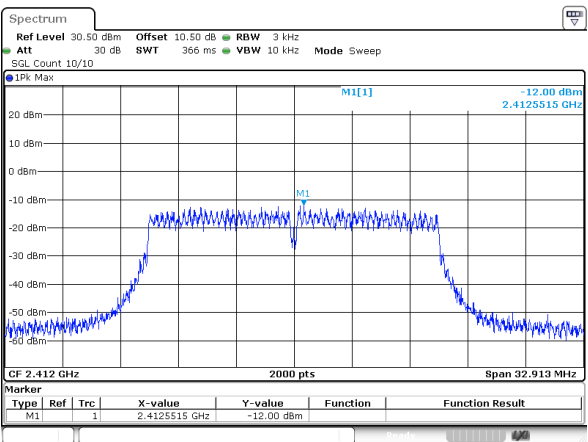


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:14:13

802.11g_2442MHz

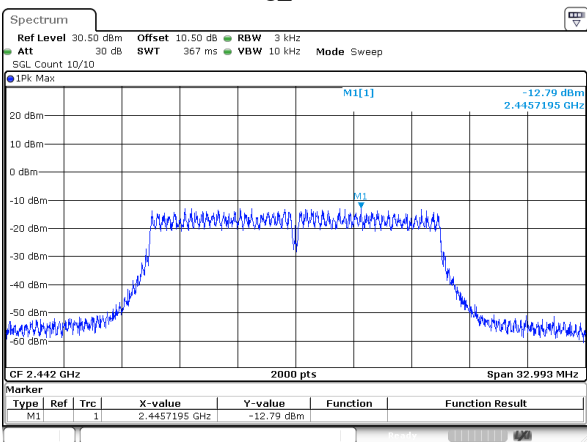


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:15:46

802.11g_2472MHz

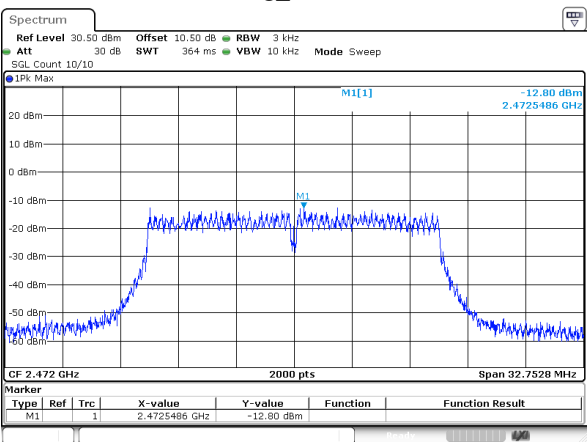


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:17:26

802.11n20_2412MHz

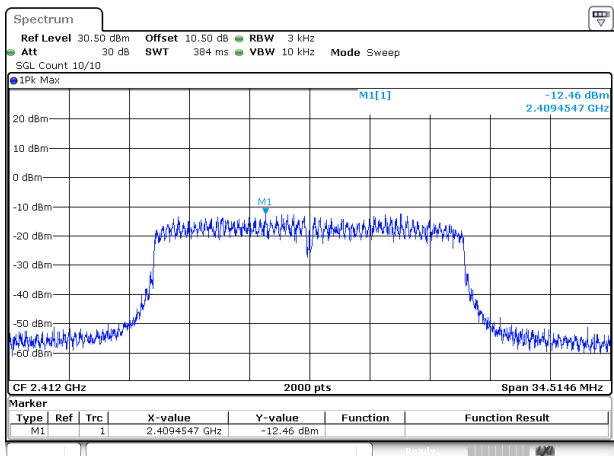


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:24:03

802.11n20_2442MHz

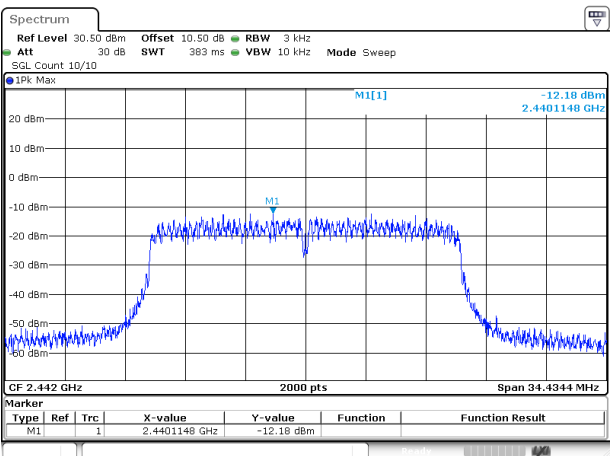


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 16:00:43

802.11n20_2472MHz

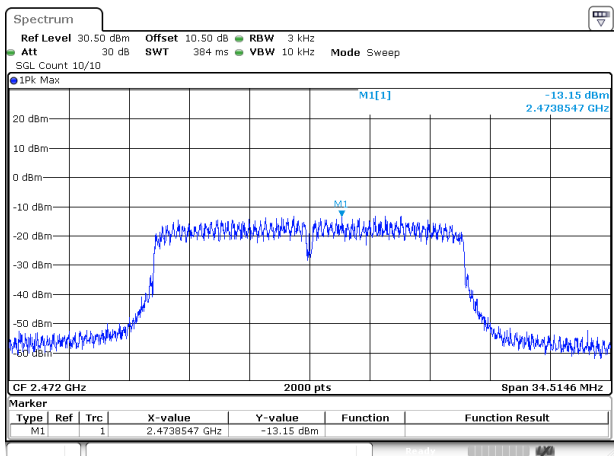


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:26:59

802.11n40_2422MHz

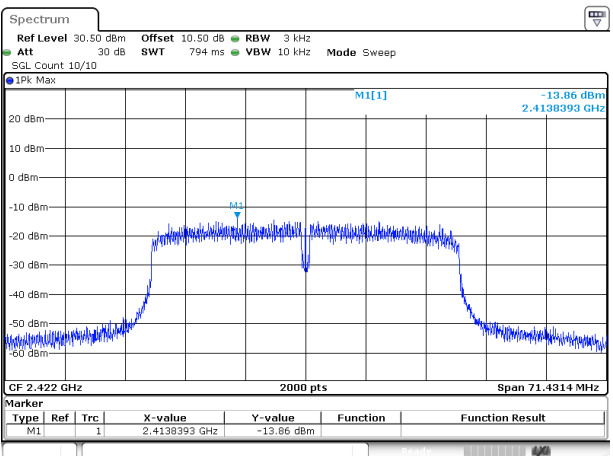


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:28:23

802.11n40_2442MHz

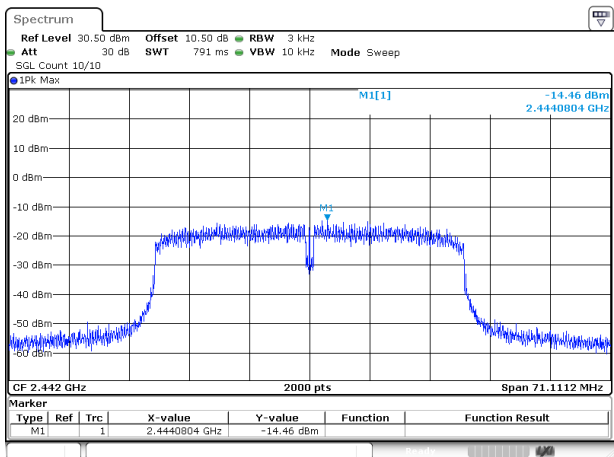

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:29:23

802.11n40_2462MHz

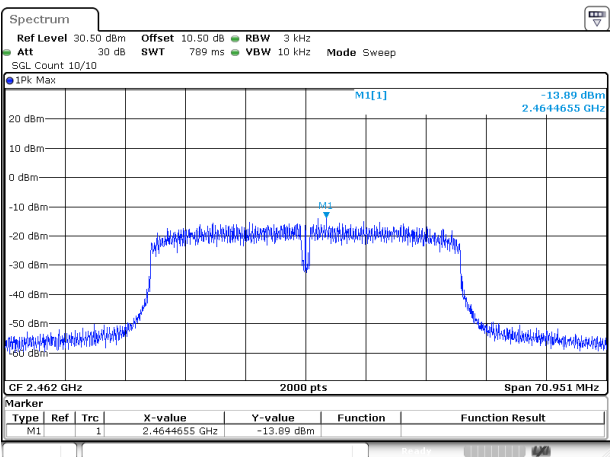

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:54:26

100 kHz Bandwidth of Frequency Band Edge**Test Information:**


Sample No.:	3G8T-5	Test Date:	2026/02/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------


Test Data:

802.11b_2412MHz

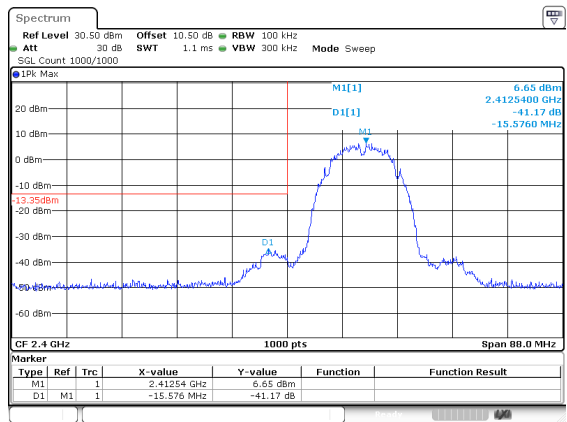


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:09:18

802.11b_2472MHz

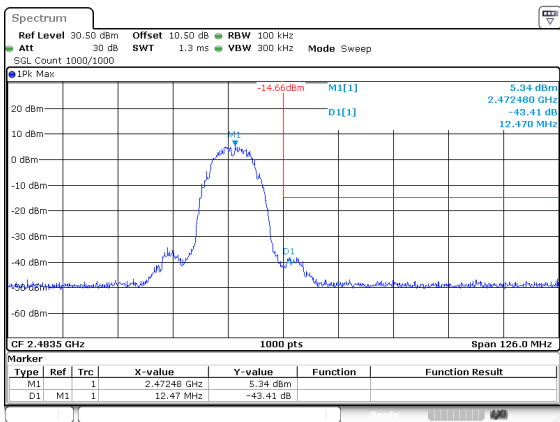


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:12:11

802.11g_2412MHz

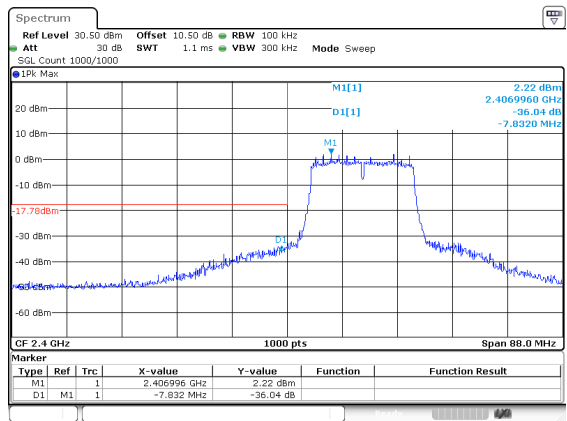


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:14:02

802.11g_2472MHz

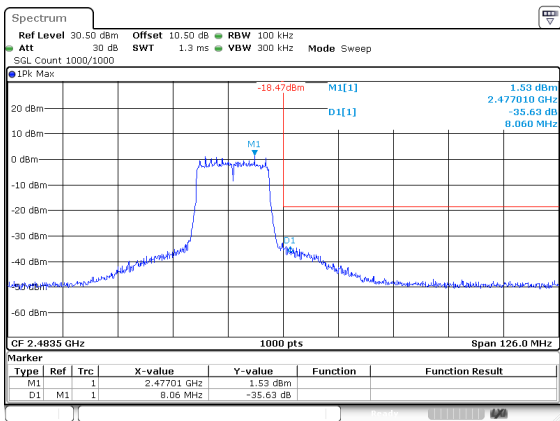


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:17:15

802.11n20_2412MHz

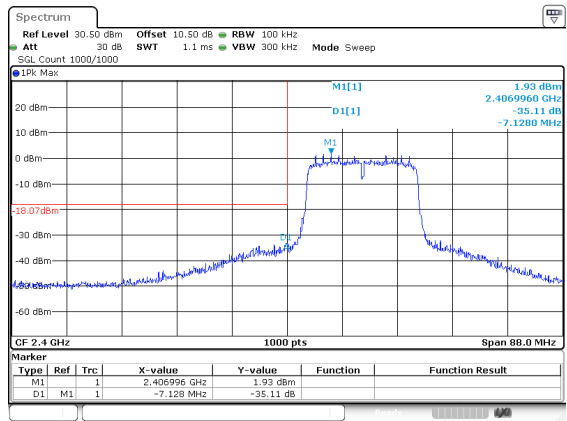


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:23:53

802.11n20_2472MHz

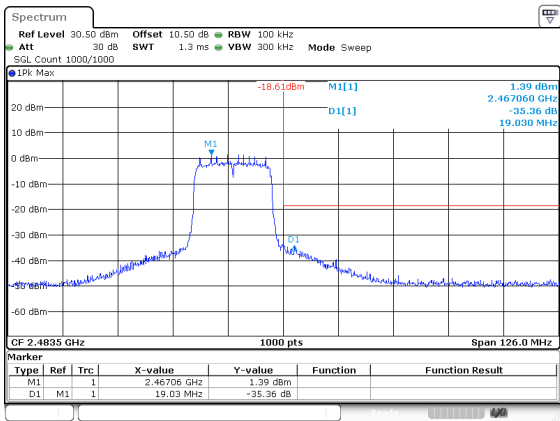


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:26:48

802.11n40_2422MHz

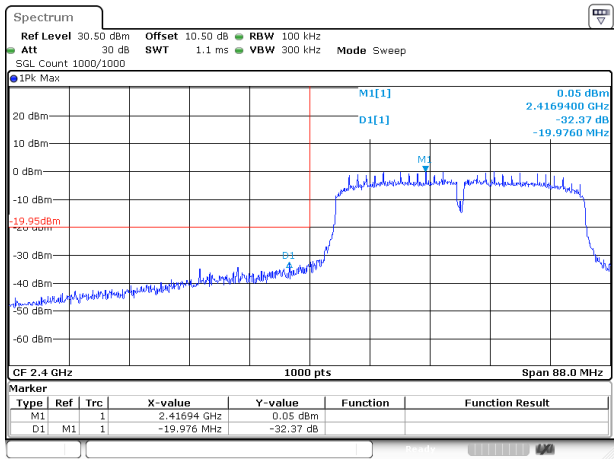

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:28:06

802.11n40_2462MHz

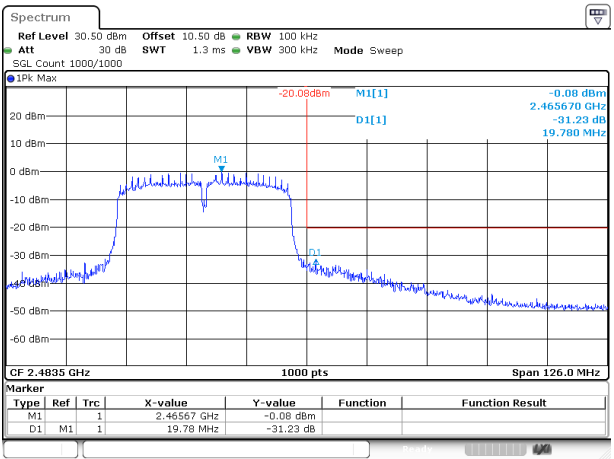

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:30:35

Duty Cycle**Test Information:**

Sample No.:	3G8T-5	Test Date:	2026/02/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	N/A

Environmental Conditions:


Temperature: (°C)	24.9	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Data:

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
802.11b	2442	32.907	32.973	99.80	/	/	0.010
802.11g	2442	5.469	5.510	99.26	/	/	0.010
802.11n20	2442	5.062	5.101	99.24	/	/	0.010
802.11n40	2442	2.450	2.488	98.47	/	/	0.010


$$\text{Duty Cycle} = \text{Ton}/(\text{Ton}+\text{Toff}) \times 100\%$$

802.11b_2442MHz

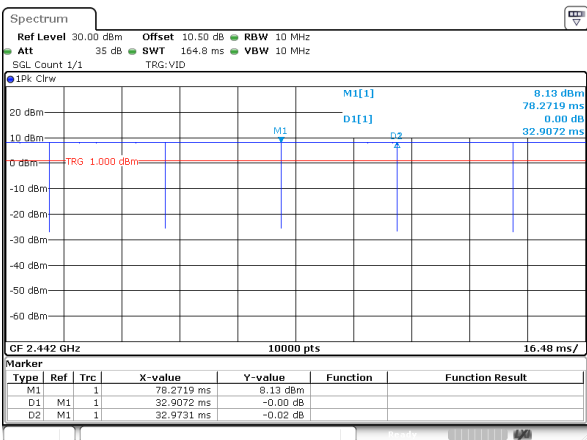


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 14:53:47

802.11g_2442MHz

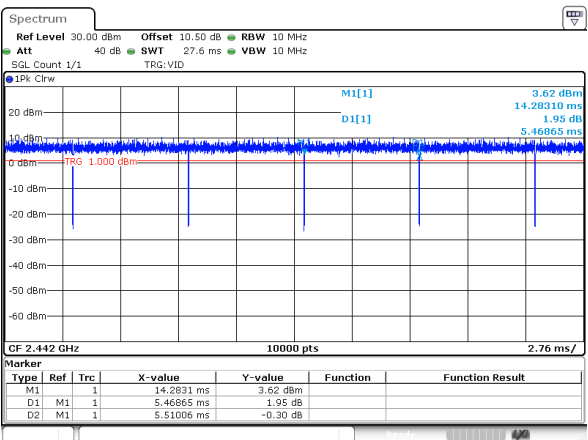


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 14:54:24

802.11n20_2442MHz

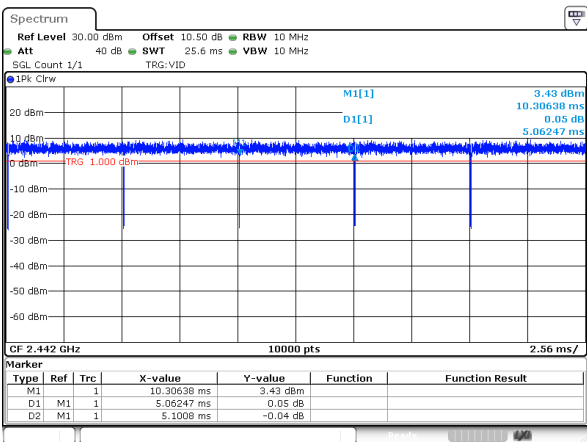

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 14:54:50

802.11n40_2442MHz

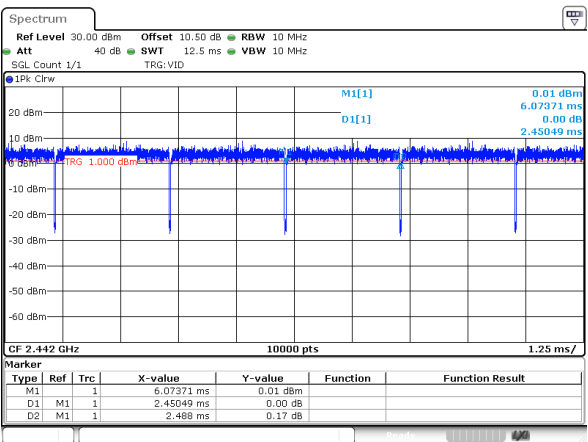

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 14:55:20

Conducted Spurious Emission**Test Information:**


Sample No.:	3G8T-5	Test Date:	2026/02/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cheeb Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------


Test Data:

802.11b_2412MHz

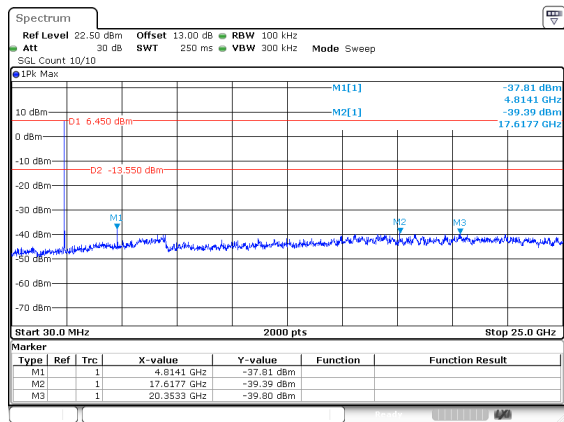


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:43:01

802.11b_2442MHz

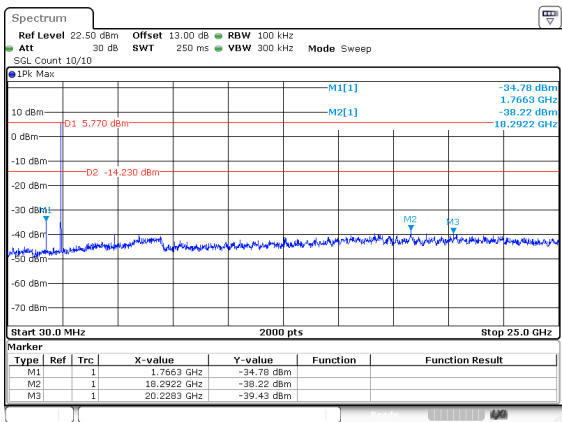


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 16:08:59

802.11b_2472MHz

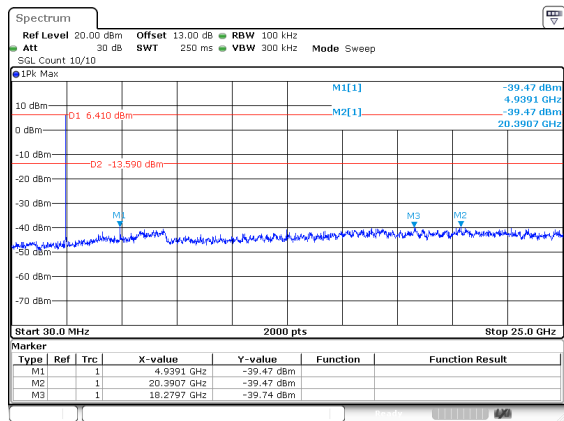


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:44:16

802.11g_2412MHz

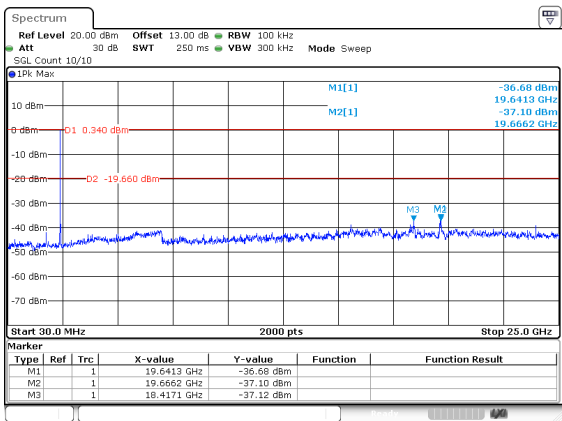


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 16:10:47

802.11g_2442MHz

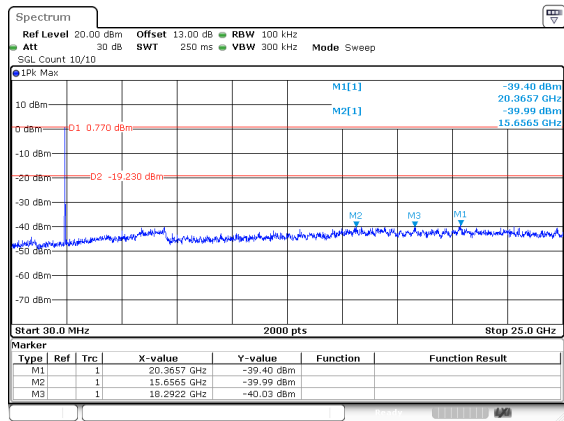


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:45:25

802.11g_2472MHz

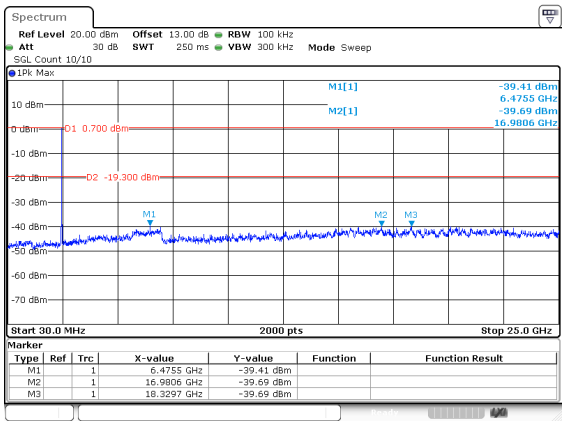


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:45:52

802.11n20_2412MHz

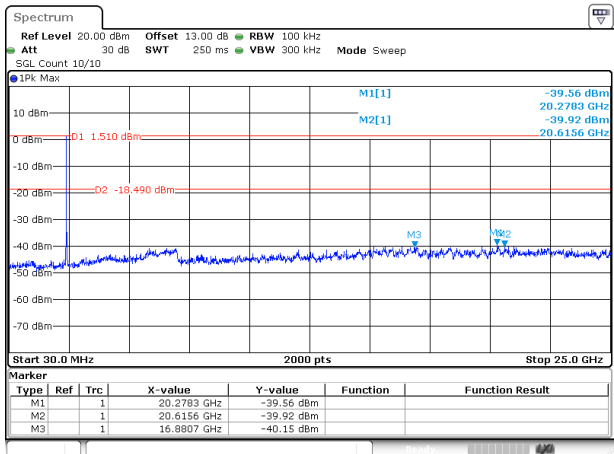


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:46:26

802.11n20_2442MHz

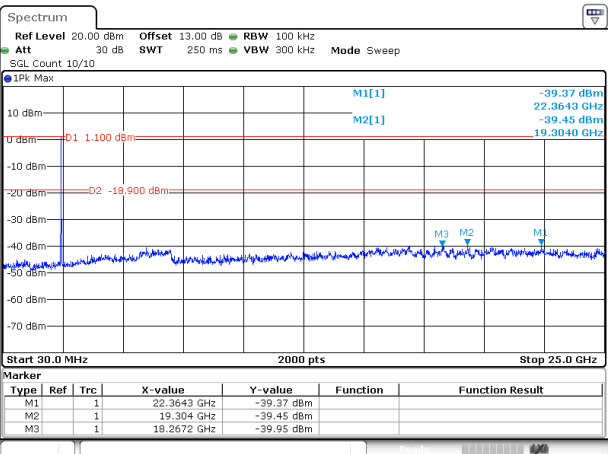


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:46:54

802.11n20_2472MHz

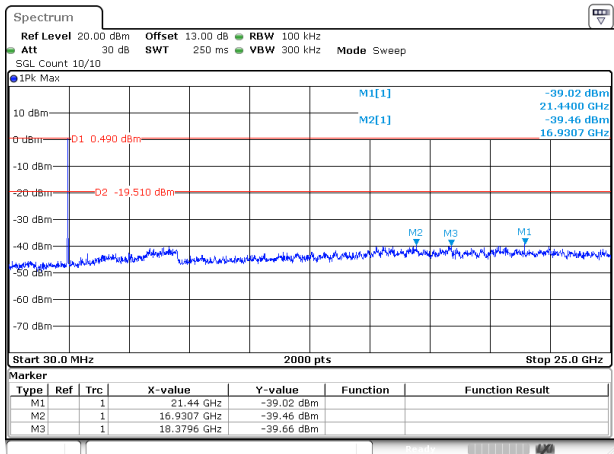


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:47:24

802.11n40_2422MHz

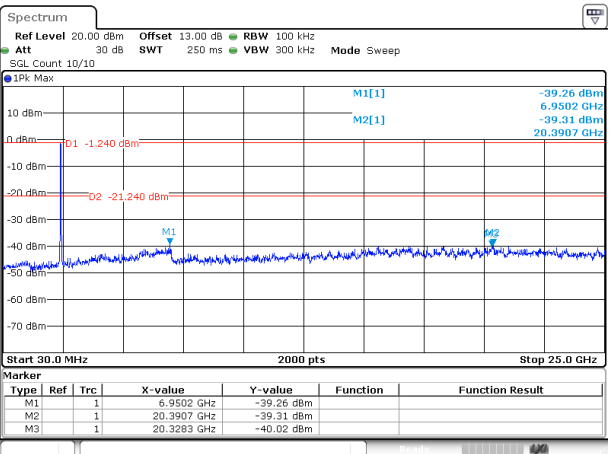


ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:47:57

802.11n40_2442MHz

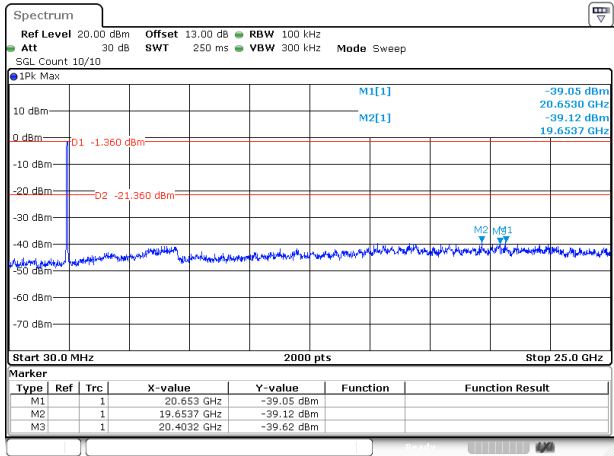

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:48:26

802.11n40_2462MHz

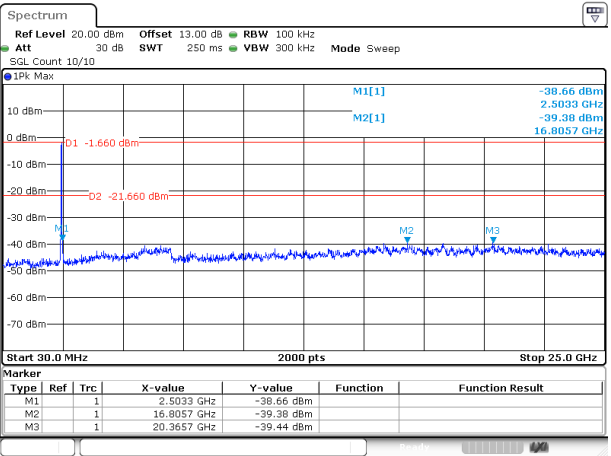

ProjectNo.:2601P11316E-RF Tester:Cheeb Huang
Date: 2.FEB.2026 15:48:56

RF EXPOSURE EVALUATION

MPE-Based Exemption

Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 v01 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

Result

Mode	Frequency (MHz)	Tune up conducted power [#] (dBm)	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (mW)
			(dBi)	(dBd)	(dBm)	(mW)		
2.4G Wi-Fi	2412-2472	21.5	3.6	1.45	22.95	197.24	0.2	768

Note: The tune up conducted power[#] and antenna gain[#] was declared by the applicant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

Field reference level exposure exemption limits

Applicable Standard

According to RSS-102 Issue 6§6.6:

Field reference level (FRL) exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm (i.e. mobile devices), except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 1 W (adjusted for tune-up tolerance)
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance)
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz
- at or above 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 5 W (adjusted for tune-up tolerance) In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the EIRP was derived.

Calculated Data:

Mode	Frequency (MHz)	Maximum tune-up conducted power [#] (dBm)	Antenna Gain [#]	Maximum tune-up EIRP		Evaluation Distance (m)	Limit (mW)
			(dBi)	(dBm)	(mW)		
2.4G Wi-Fi	2412-2472	21.5	3.6	25.10	323.59	0.2	2684

Note: The tune up conducted power[#] and antenna gain[#] was declared by the applicant.

Result: Compliant

Note: To maintain compliance with the RF exposure guidelines, place the equipment at least 20cm from nearby persons.

EUT PHOTOGRAPHS

Please refer to the attachment 2601P11316E-RF-EXP External photo and 2601P11316E-RF-INP Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2601P11316E-RF-TSPA Test Setup photo.

***** **END OF REPORT** *****