


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

18.4 TEST DATA


[TestMode: TX lowest channel]; [Polarity: Horizontal]

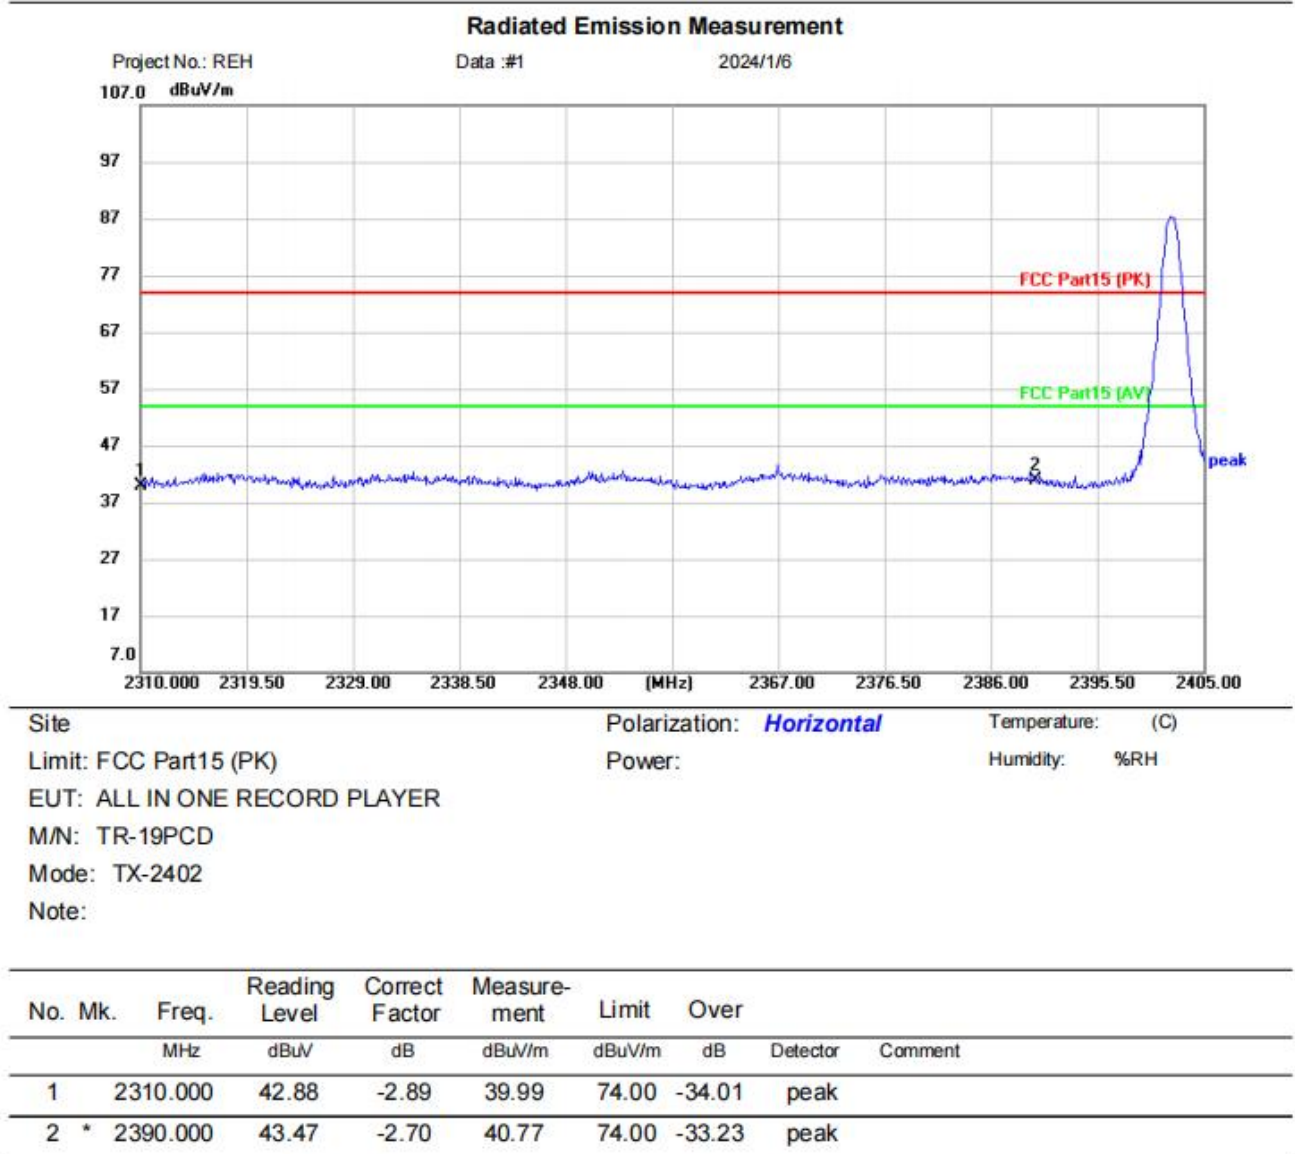

Test Result: Pass

[TestMode: TX lowest channel]; [Polarity: Vertical]

Radiated Emission Measurement

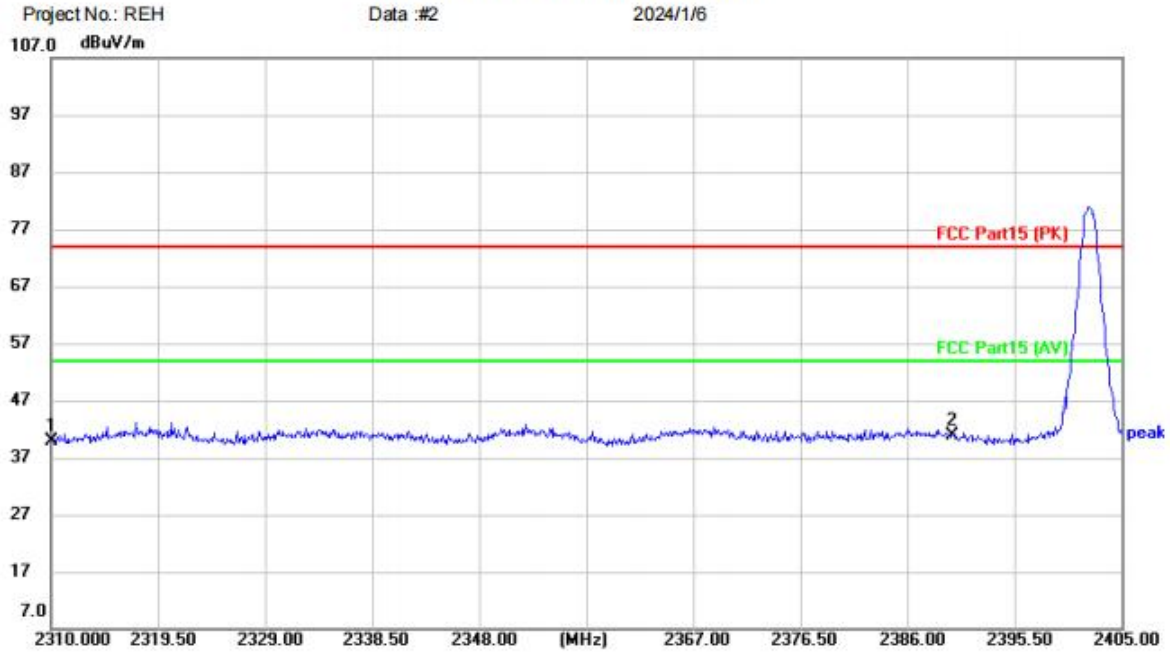


Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: ALL IN ONE RECORD PLAYER
M/N: TR-19PCD
Mode: TX-2402
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.78	-2.89	39.89	74.00	-34.11	peak	
2	*	2390.000	43.52	-2.70	40.82	74.00	-33.18	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

Radiated Emission Measurement

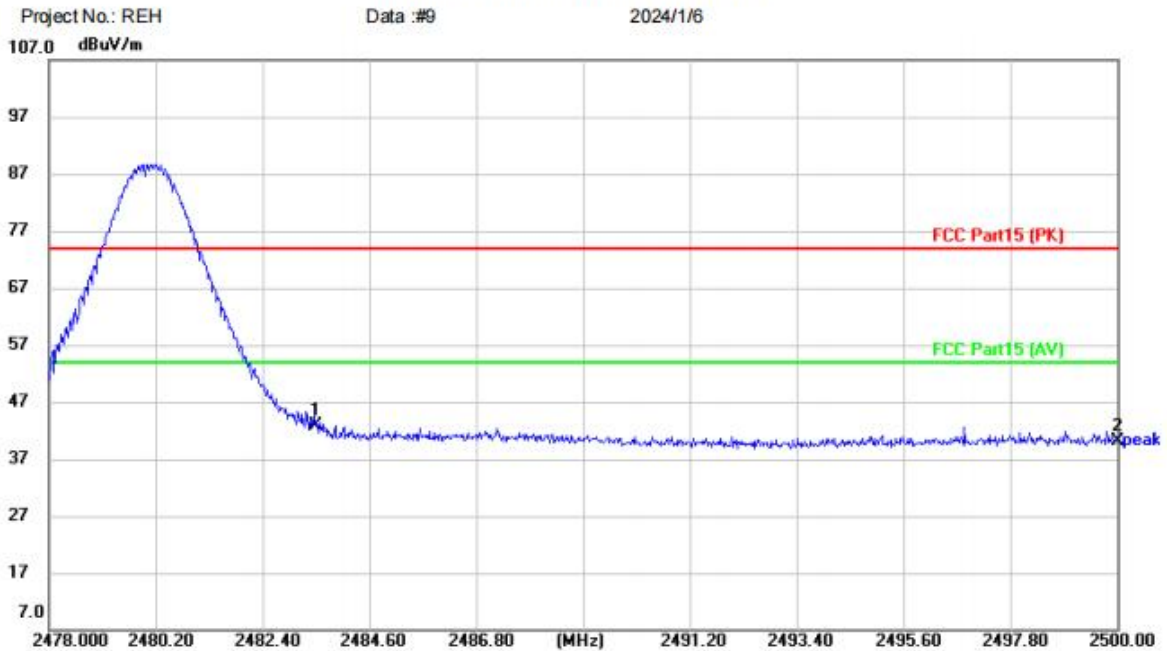

Site

Limit: FCC Part15 (PK)

EUT: ALL IN ONE RECORD PLAYER

M/N: TR-19PCD

Mode: TX-2480

Note:

Polarization: **Horizontal**

Temperature: (C)


Power:

Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	45.86	-2.91	42.95	74.00	-31.05	peak	
2		2500.000	43.18	-3.00	40.18	74.00	-33.82	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

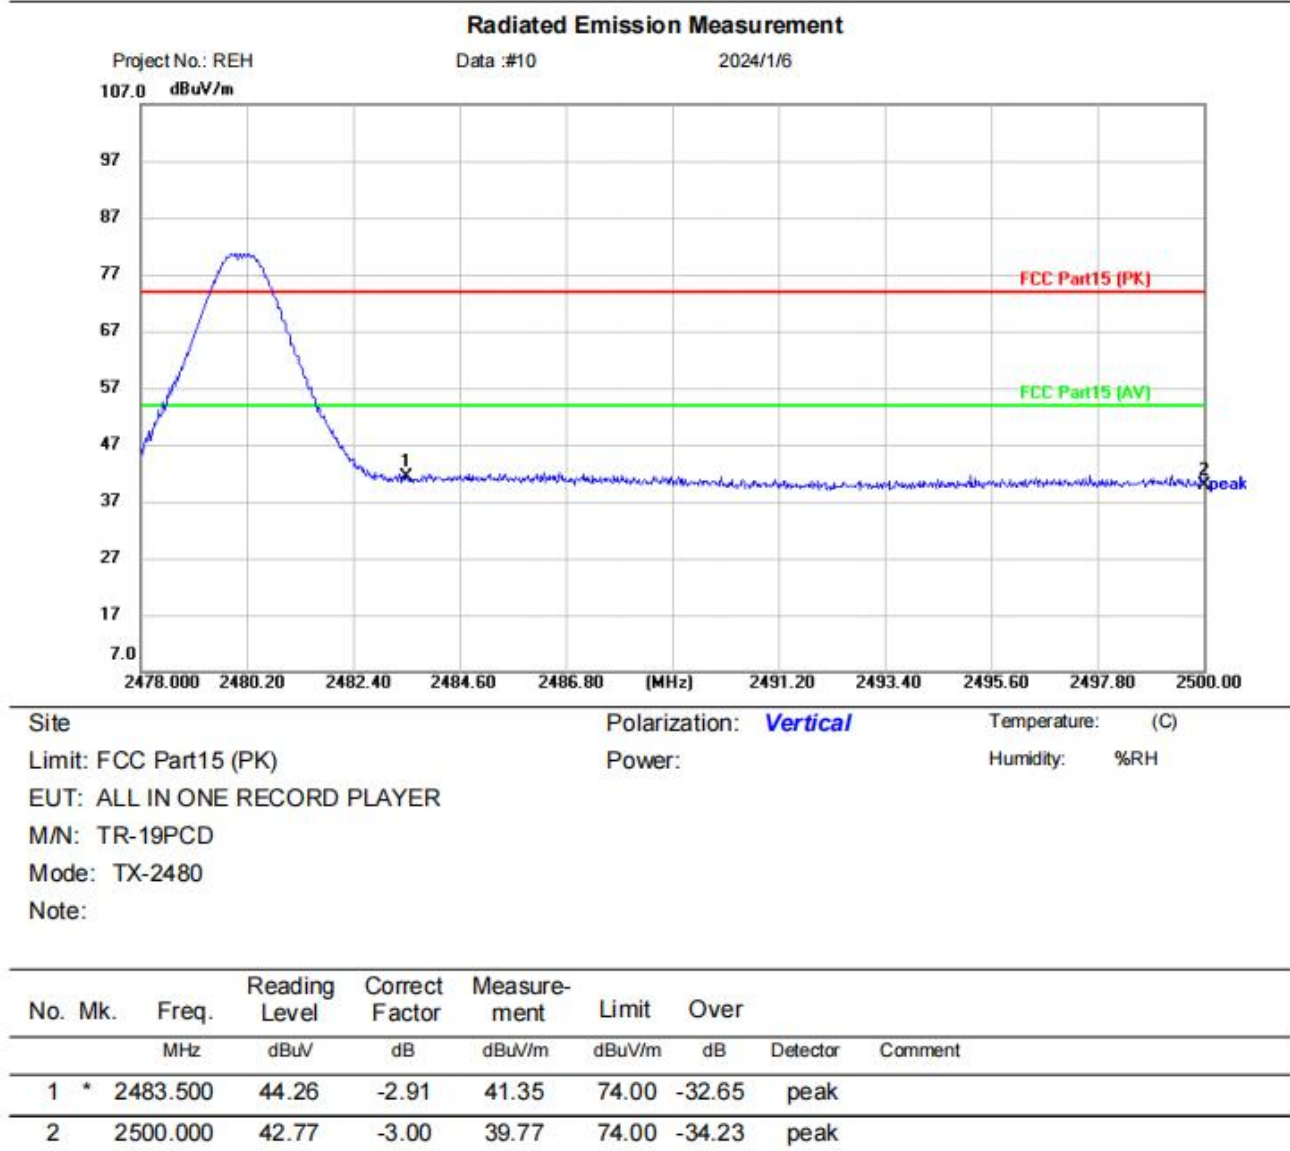

Test Result: Pass

Remark:

DH1,DH3, DH5 all have been tested, during the test, GFSK, pi/4DQPSK, 8DPSK, modulation were all pre-scanned Only the GFSK of the worst mode would be recorded in this report.

19 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


19.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.58dBi.

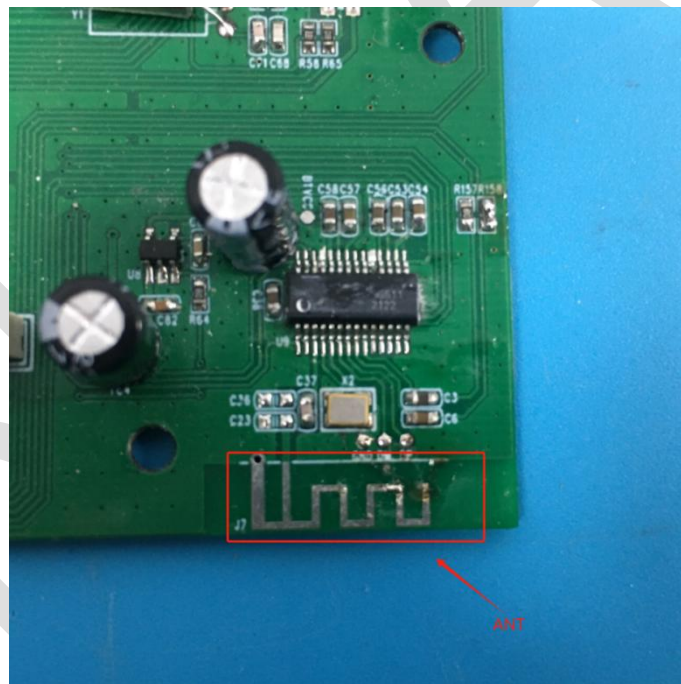


20 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

20.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	---

20.2 BLOCK DIAGRAM OF TEST SETUP

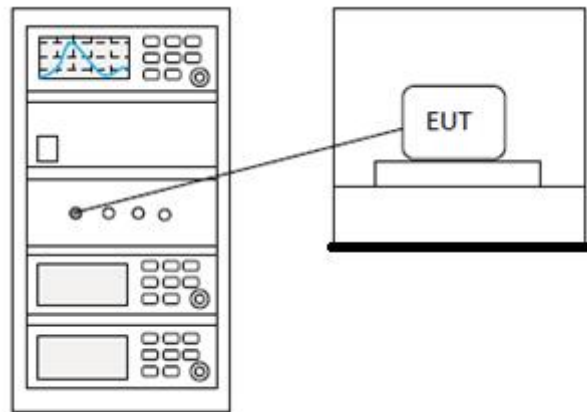

20.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


21 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

21.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	---

21.2 BLOCK DIAGRAM OF TEST SETUP

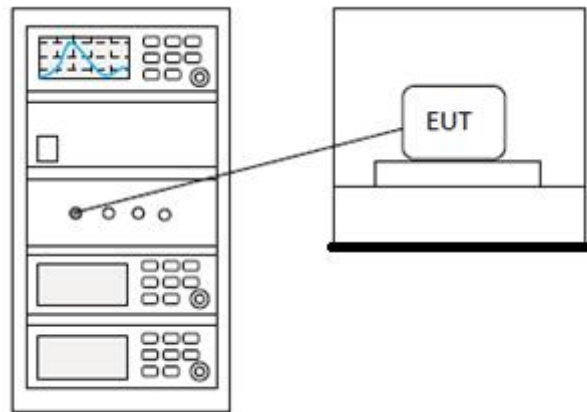

21.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


22 APPENDIX

Appendix1


22.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-2.03	21	Pass
NVNT	1-DH1	2441	Ant1	-3.208	21	Pass
NVNT	1-DH1	2480	Ant1	-3.748	21	Pass
NVNT	2-DH1	2402	Ant1	0.459	21	Pass
NVNT	2-DH1	2441	Ant1	-0.717	21	Pass
NVNT	2-DH1	2480	Ant1	-1.596	21	Pass
NVNT	3-DH1	2402	Ant1	1.39	21	Pass
NVNT	3-DH1	2441	Ant1	0.151	21	Pass
NVNT	3-DH1	2480	Ant1	-0.576	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

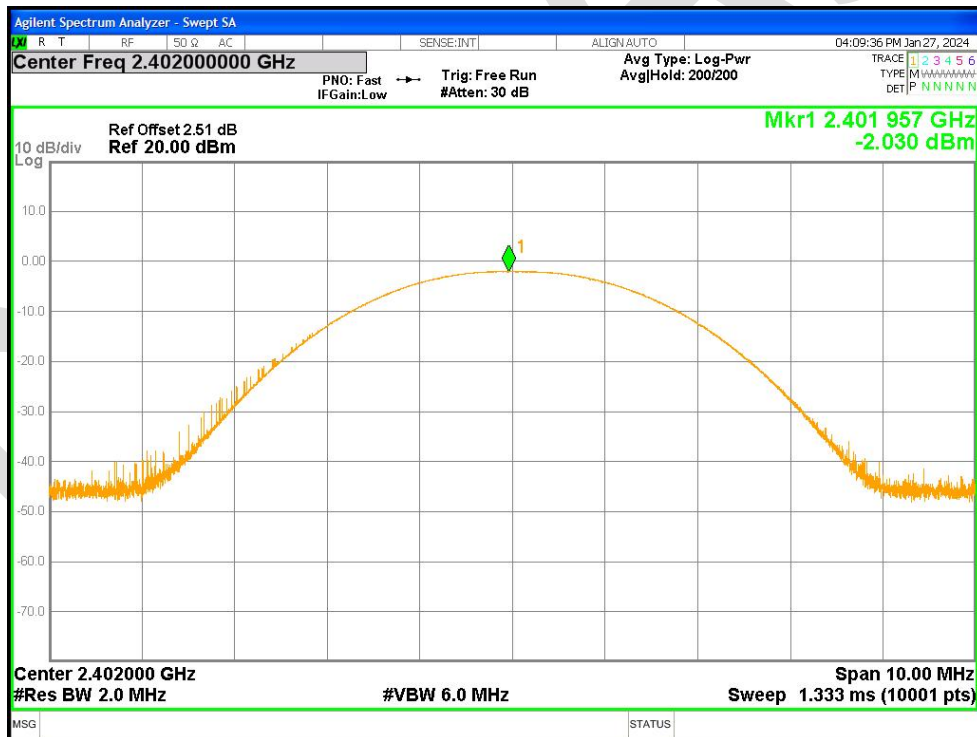


Power NVNT 1-DH1 2441MHz Ant1

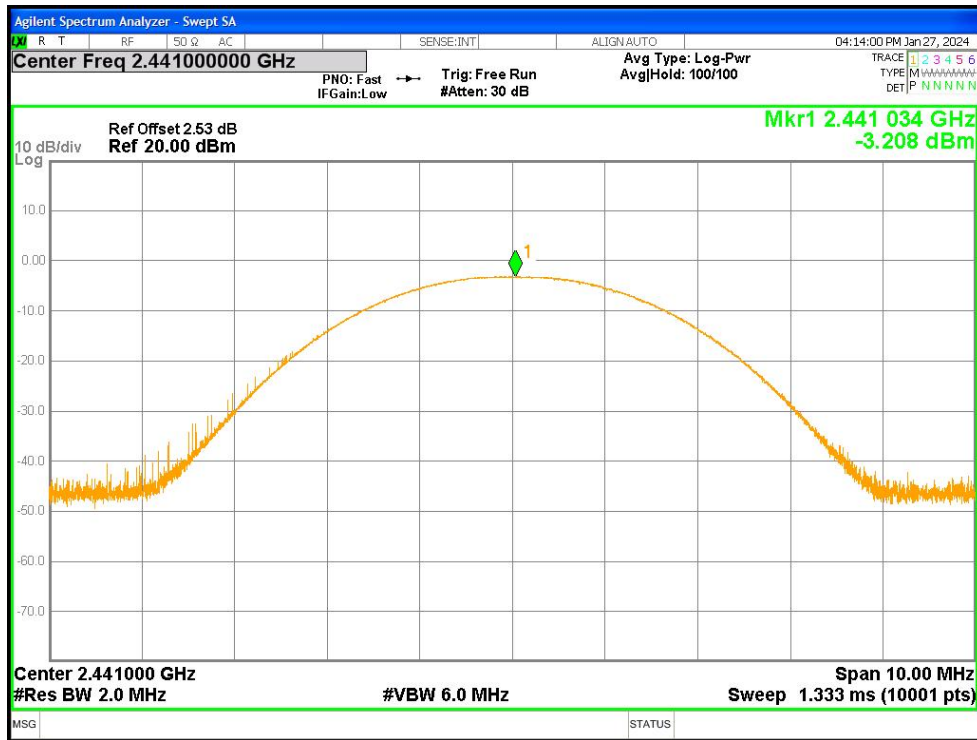


Power NVNT 1-DH1 2480MHz Ant1

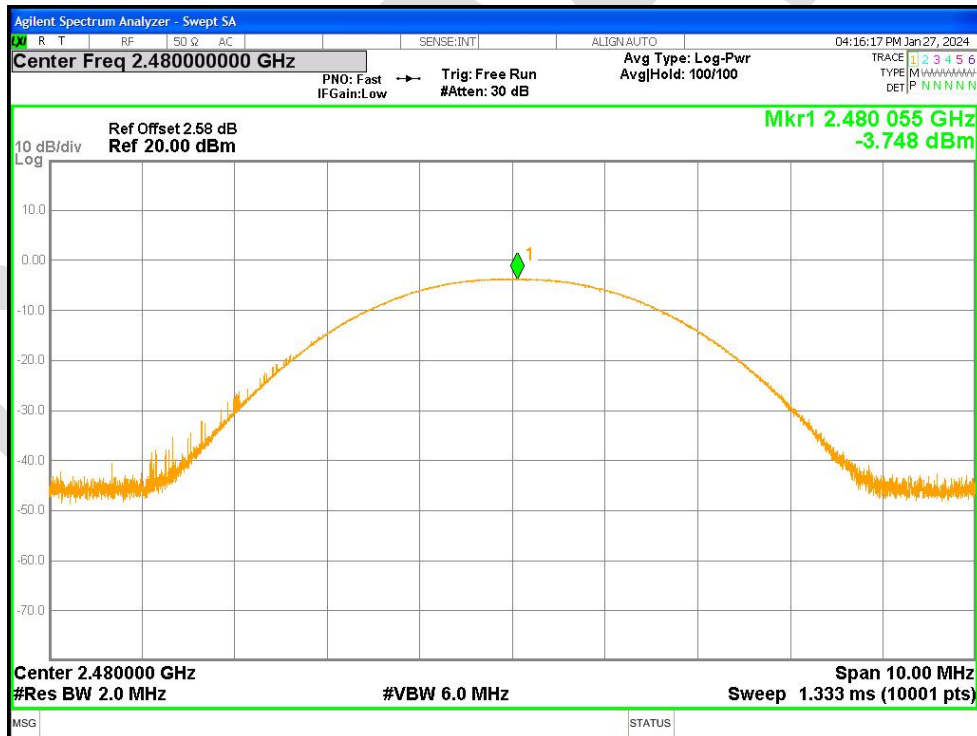


Power NVNT 2-DH1 2402MHz Ant1

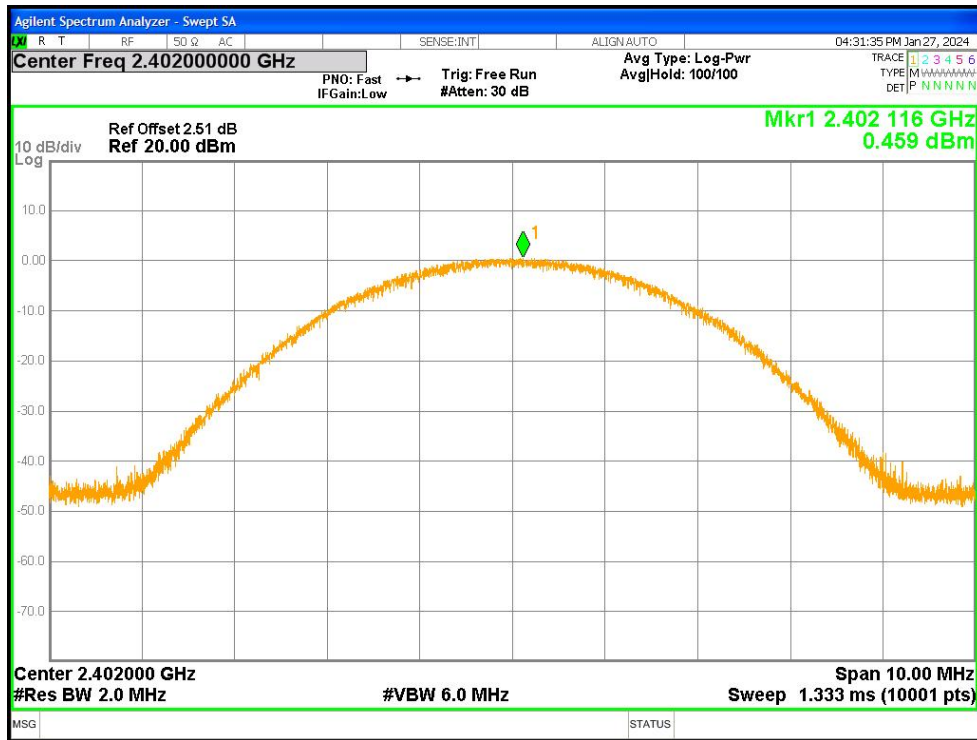


Power NVNT 2-DH1 2441MHz Ant1

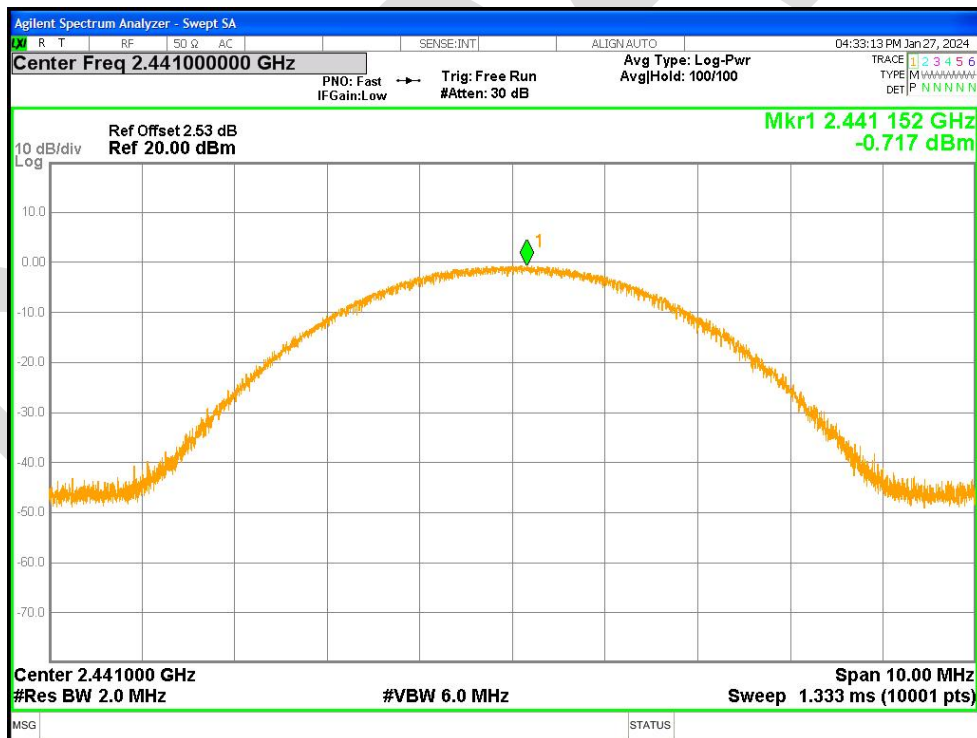


Power NVNT 2-DH1 2480MHz Ant1

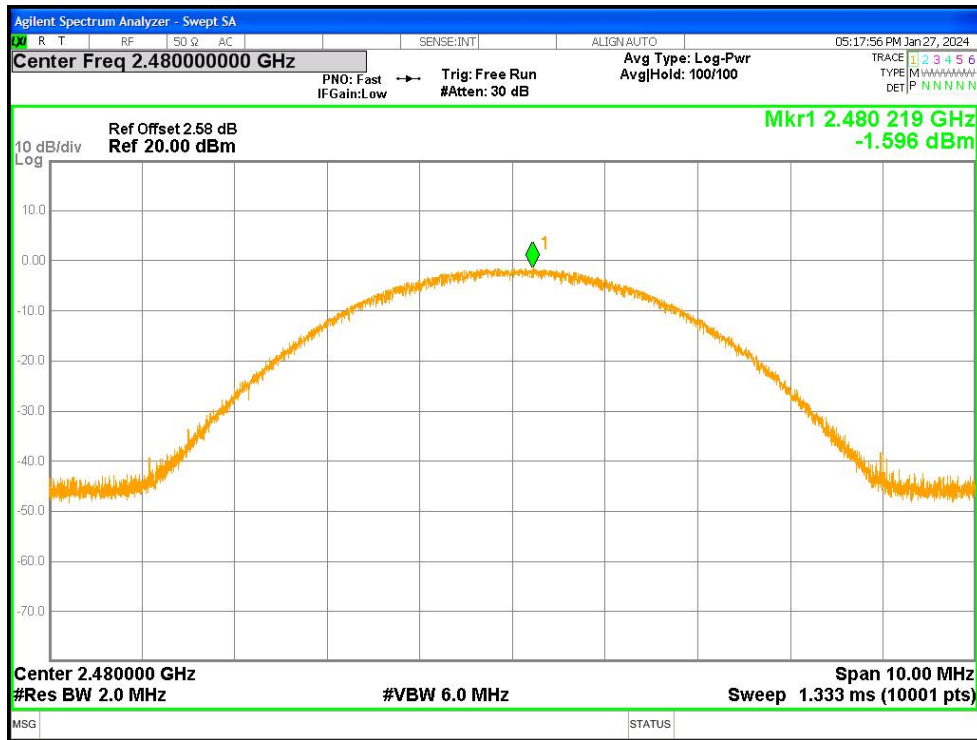


Power NVNT 3-DH1 2402MHz Ant1

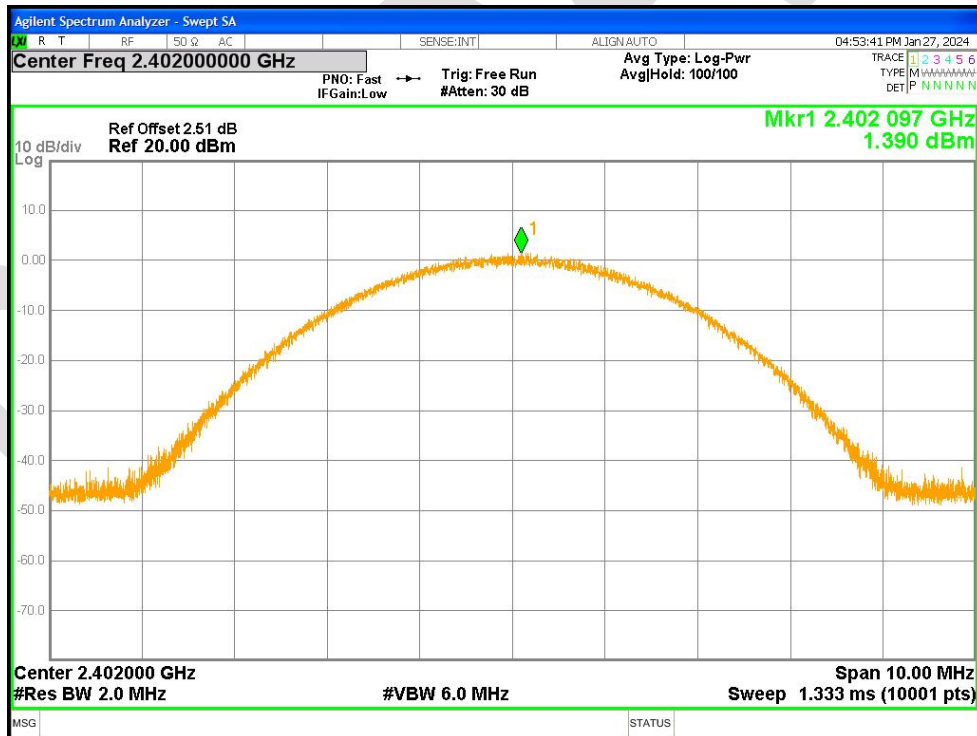

Power NVNT 3-DH1 2441MHz Ant1

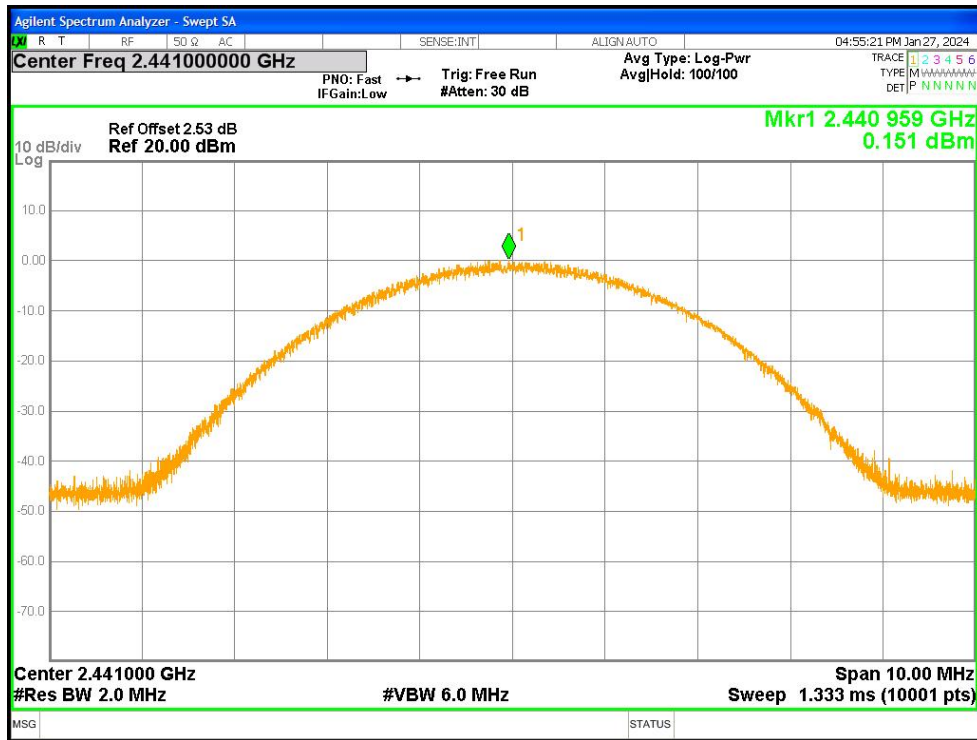


Power NVNT 3-DH1 2480MHz Ant1

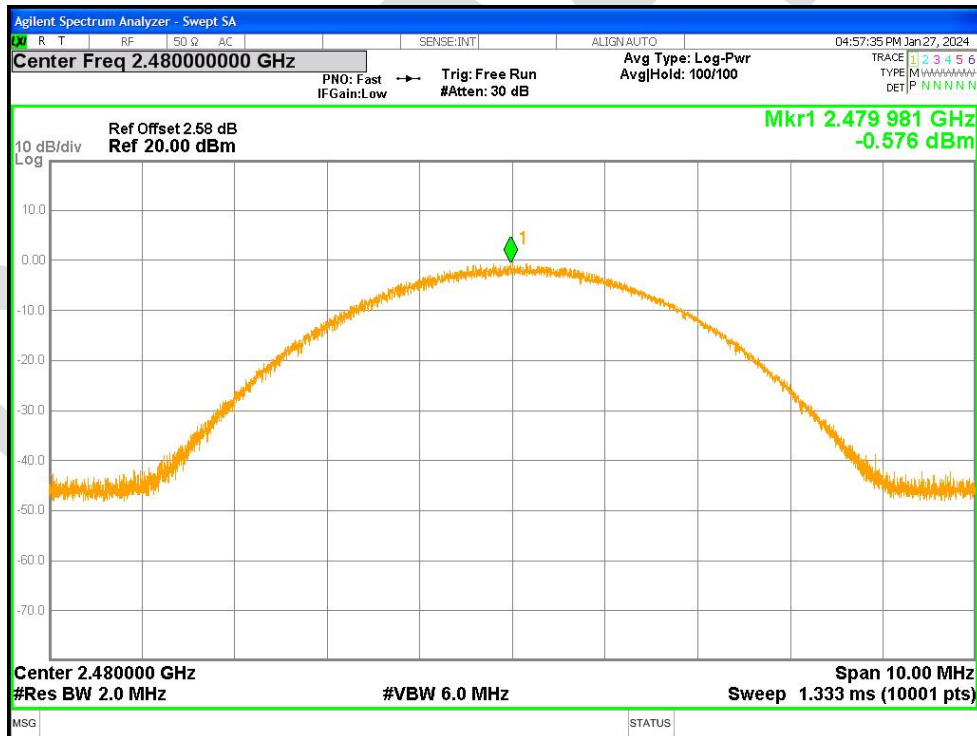


22.2 -20DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	1.001	0	Pass
NVNT	1-DH1	2441	Ant1	1.002	0	Pass
NVNT	1-DH1	2480	Ant1	1.007	0	Pass
NVNT	2-DH1	2402	Ant1	1.268	0	Pass
NVNT	2-DH1	2441	Ant1	1.266	0	Pass
NVNT	2-DH1	2480	Ant1	1.288	0	Pass
NVNT	3-DH1	2402	Ant1	1.215	0	Pass
NVNT	3-DH1	2441	Ant1	1.216	0	Pass
NVNT	3-DH1	2480	Ant1	1.216	0	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

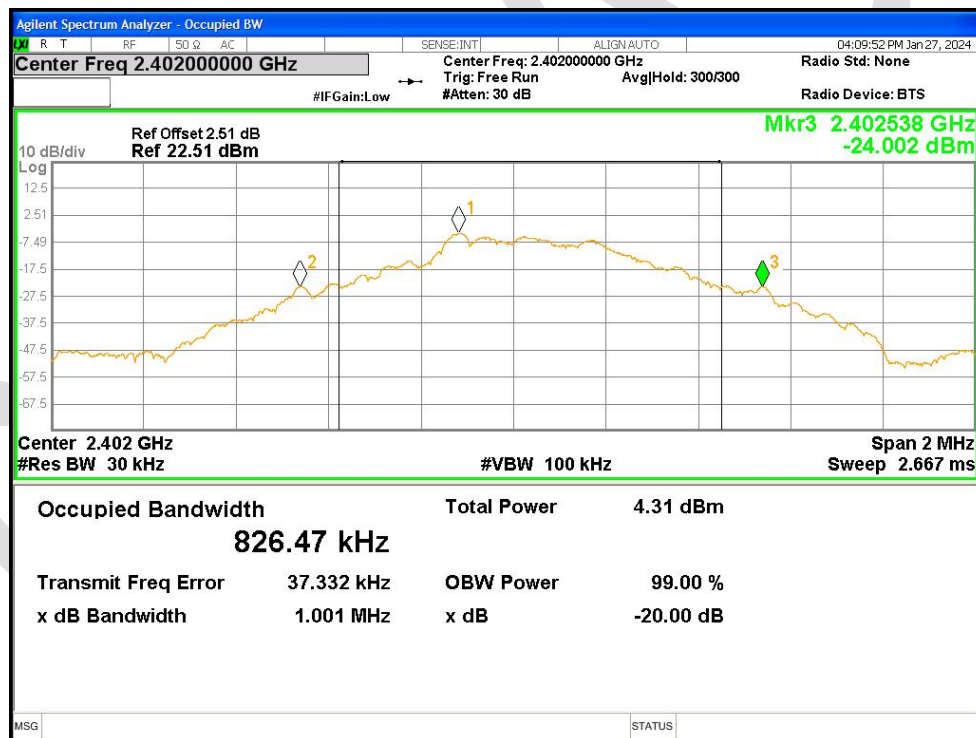


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

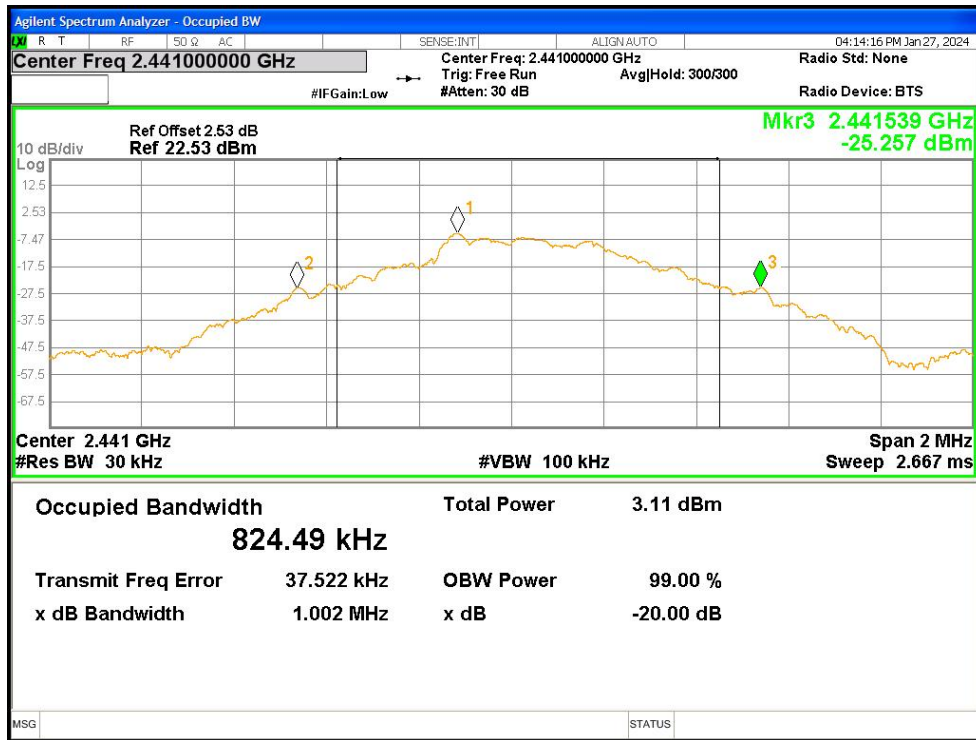


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

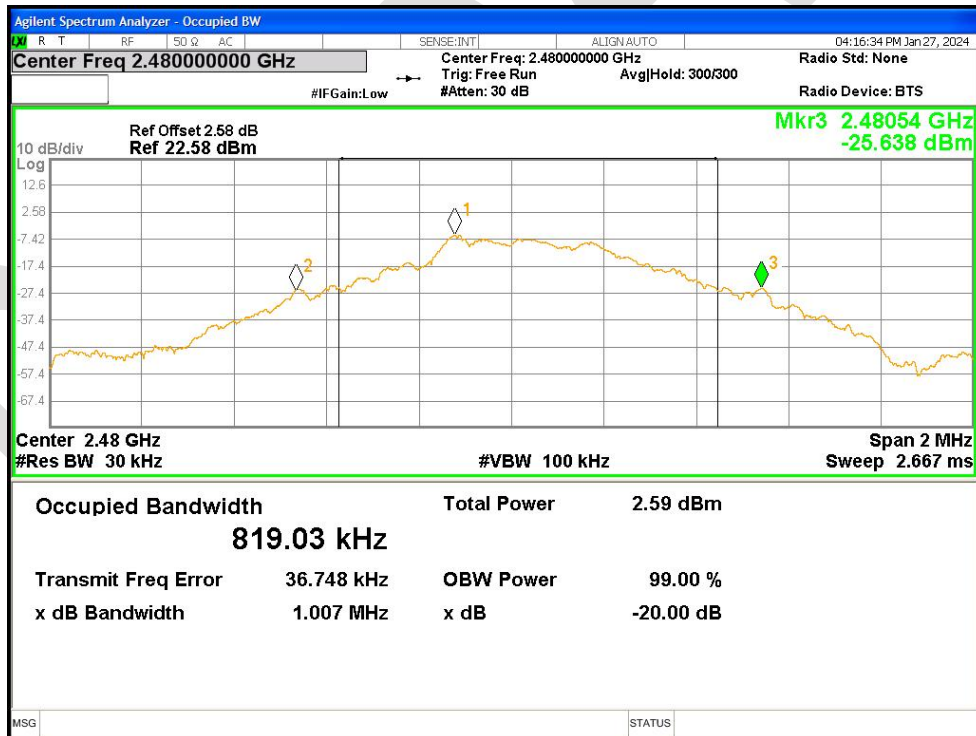


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

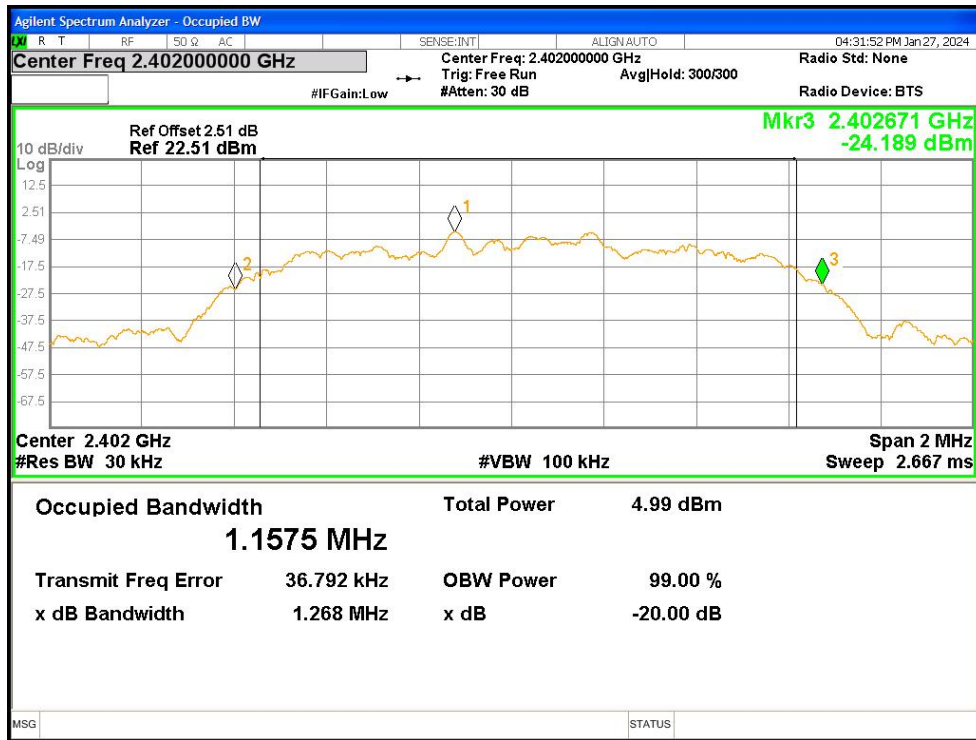


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

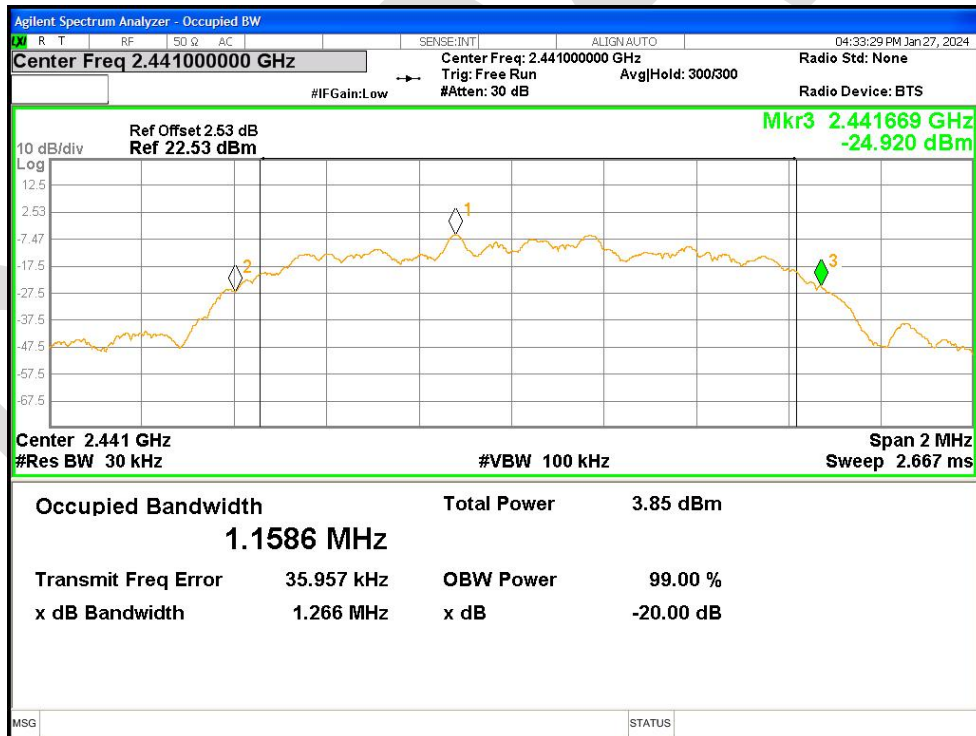


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

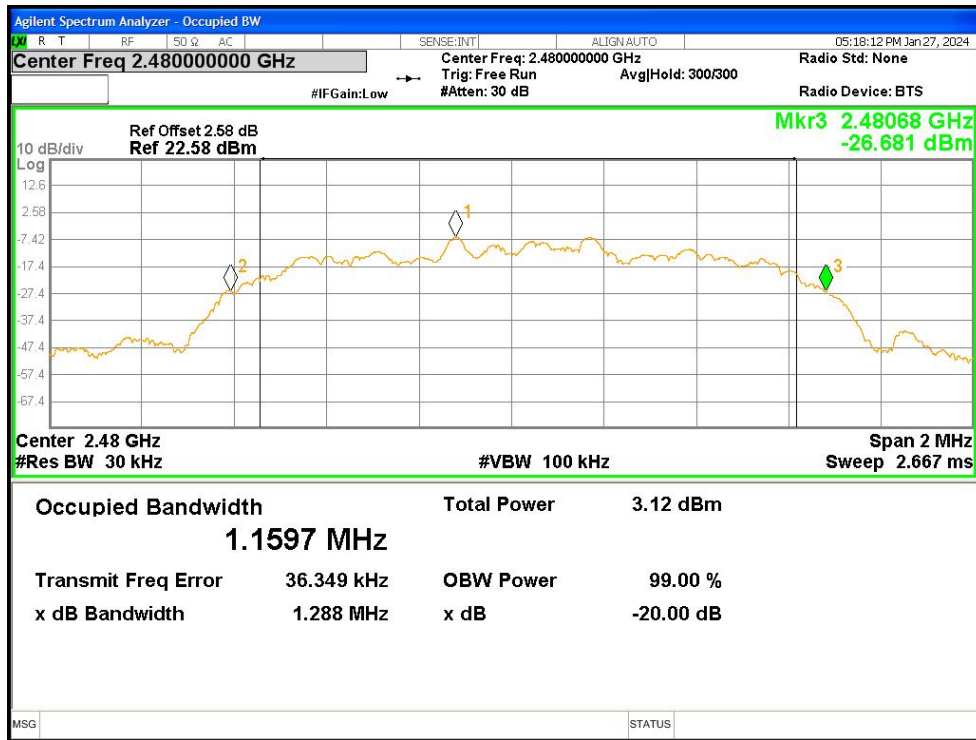

-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

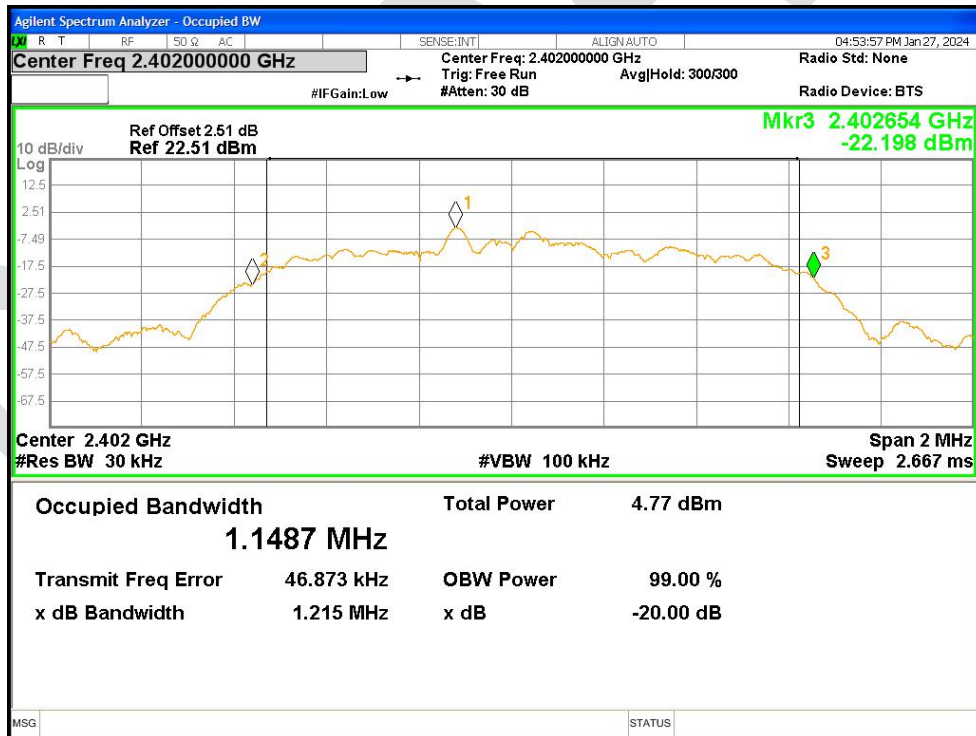

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

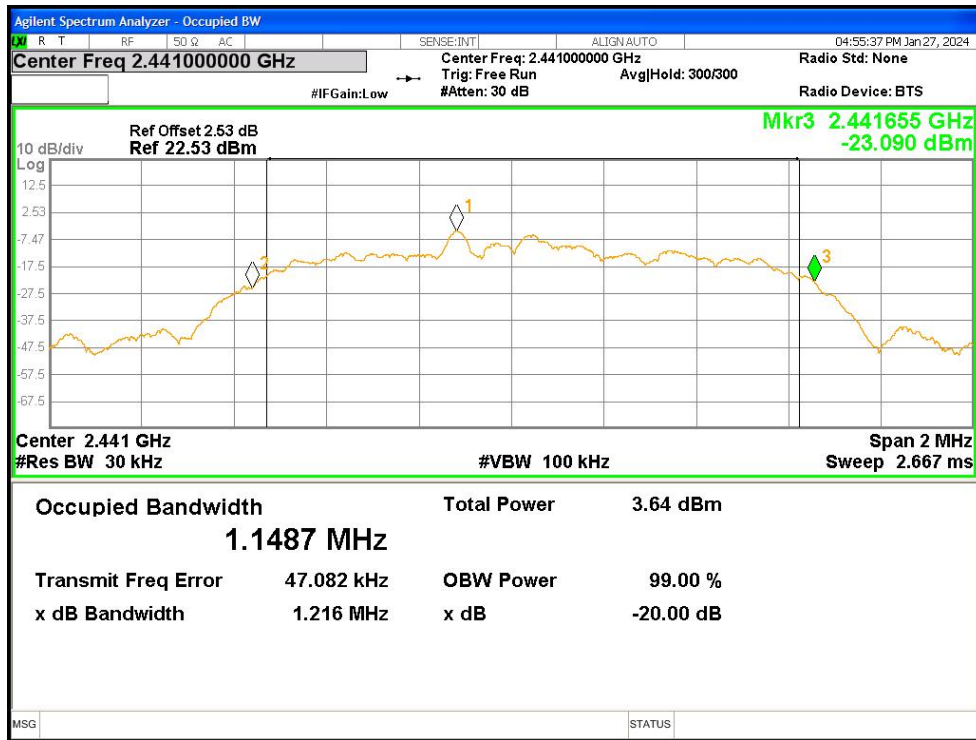

-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

