FCC RF Test Report

APPLICANT	:	ASUSTeK COMPUTER INC.
EQUIPMENT	:	ASUS Phone (Mobile Phone)
BRAND NAME	:	ASUS
MODEL NAME	:	ASUS_AI2205_E, ASUS_AI2205_F
FCC ID	:	MSQAI2205
STANDARD	:	47 CFR Part 2, 27
CLASSIFICATION	:	PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S)	:	Feb. 05, 2023 ~ Feb. 27, 2023

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia

ACCREDITED
Cert #5145.01

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY **3**

SUMMARY OF TEST RESULT **4**

1 GENERAL DESCRIPTION **5**

1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 6
1.5 Modification of EUT 7
1.6 Maximum EIRP Power and Emission Designator 7
1.7 Testing Location 9
1.8 Test Software 9
1.9 Applicable Standards 9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **10**

2.1 Test Mode 10
2.2 Connection Diagram of Test System 12
2.3 Support Unit used in test configuration and system 12
2.4 Measurement Results Explanation Example 12
2.5 Frequency List of Low/Middle/High Channels 13

3 CONDUCTED TEST ITEMS **15**

3.1 Measuring Instruments 15
3.2 Test Setup 15
3.3 Test Result of Conducted Test 15
3.4 Conducted Output Power and EIRP 16
3.5 Peak-to-Average Ratio 17
3.6 Occupied Bandwidth 18
3.7 Conducted Band Edge 19
3.8 Conducted Spurious Emission 21
3.9 Frequency Stability 22

4 RADIATED TEST ITEMS **23**

4.1 Measuring Instruments 23
4.2 Test Setup 23
4.3 Test Result of Radiated Test 24
4.4 Radiated Spurious Emission 25

5 LIST OF MEASURING EQUIPMENT **26**

6 UNCERTAINTY OF EVALUATION **27**

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG2D3005I	Rev. 01	Initial issue of report	Apr. 11, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7, n41, n38)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (5G NR n66)	EIRP < 1Watt		
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(h)	Conducted Band Edge Measurement (5G NR n66)	< 43+10log10(P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7, n41, n38)	§27.53(m)(4)		
3.8	§2.1051 §27.53(h)	Conducted Spurious Emission (5G NR n66)	< 43+10log10(P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7, n41, n38)	< 55+10$\log_{10}$(P[Watts])		
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(h)	Radiated Spurious Emission (5G NR n66)	< 43+10$\log_{10}$(P[Watts])	PASS	Under limit 15.88 dB at 9222.00 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n41, n38)	< 55+10log10(P[Watts])		

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.2 Manufacturer

ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	ASUS Phone (Mobile Phone)
Brand Name	ASUS
Model Name	ASUS_AI2205_E, ASUS_AI2205_F
FCC ID	MSQAI2205
IMEI Code	Conducted : 355156850100810/355156850100828 Radiation : 355156850101156/355156850101164
HW Version	R2.0
SW Version	Android 13
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four SKUs of EUT for this project. The differences between them are summary below, According to the difference, we evaluate SKU1 (ASUS_AI2205_F) to perform RF test.

Sample list				
	SKU1	**SKU2**	**SKU3**	**SKU4**
Model name	**ASUS_AI2205_F**	**ASUS_AI2205_E**	**ASUS_AI2205_F**	**ASUS_AI2205_E**
Config.	US(Pro)	US(Entry)	US(Pro)	US(Entry)
RF module board	US(Pro)	US(Entry)	US(Pro)	US(Entry)
LCD+Touch front frame	AI2205 FRONT CASE ASSY WW	AI2205 FRONT CASE ASSY WW	AI2205 FRONT CASE ASSY WW	AI2205 FRONT CASE ASSY WW
DDR	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B
UFS	512G(Kioxia)(UFS4.0) Kioxia / THGJFJT2T85BAT0	512G(Samsung)(UFS4.0) Samsung /KLUFG8RHHD-B0G1	512G(Kioxia)(UFS4.0) Kioxia / THGJFJT2T85BAT0	512G(Samsung)(UFS4.0) Samsung /KLUFG8RHHD-B0G1
MB	AI2205_MB	AI2205_MB	AI2205_MB	AI2205_MB
Back cover	WW-Dark-Ult	WW-Light-Entry	WW-Dark-Ult	WW-Light-Entry
Battery	SCUD / C21P2101	SWD / C21P2101	SWD / C21P2101	SCUD / C21P2101
Rear Camera 50+13M	SHINETECH/CDN60B	TRIPLEWIN/CASDA-002A 1	TRIPLEWIN/CASDA-002A 1	SHINETECH/CDN60B
Front Camera 32M	TSPRECISION/TVHF2170	SHINETECH/ST-CMG07B	SHINETECH/ST-CMG07B	TSPRECISION/TVHF2170

Rear Camera 5M	HUNAN KINGCOME/KBFE378	TSPRECISION/TV8F2224	TSPRECISION/TV8F2224	HUNAN KINGCOME/KBFE378
PCB	COMPEQ	COMPEQ	COMPEQ	COMPEQ
CPU	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz
Rx Frequency	5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 2110 MHz~ 2200 MHz
Bandwidth	n7 : 5MHz / 10MHz / 15MHz / 20MHz n38 : 20MHz / 30MHz / 40MHz n41 : 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz n66: 5MHz / 10MHz / 15MHz / 20MHz / 30MHz
SCS	n7, n66 for 15kHz n38, n41 for 30kHz
Antenna Gain / Type	**<Ant.1> PIFA Antenna** n7 : -0.36 dBi n66 : 1.37 dBi n41: -0.36 dBi **<Ant. 2> PIFA Antenna** n7 : -0.63 dBi n66 : -6.41 dBi n41: -0.63 dBi **<Ant. 7> PIFA Antenna** n38 : -2.25 dBi n41 : -2.25 dBi n66 : -3.57 dBi **<Ant. 8> PIFA Antenna** n38 : -2.97 dBi n41 : -2.97 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

3. The maximum EIRP is calculated from output power and antenna gain, only the maximum EIRP of Ant. 1 for 5G NR n7/n66, Ant. 8 for and n38/n41, and Ant.(8+1) for n41_UL MIMO are shown in the report.
4. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
5. 5G NR n7/n41/n66 support SA mode and NSA mode. According to the maximum power between SA and NSA mode, main test SA for conducted items and verify Spurious for NSA worst mode.
6. The device supports two PA switch for 5G NR n66 (main PA on Ant.1/2 and other PA on Ant.7), the maximum power of main PA is higher than the other PA, the maximum EIRP of main PA for Ant.1 is

higher than Ant.2. Therefore, the maximum EIRP of main PA for Ant.1 is shown in the report.

7. 5G NR n38 supports SA mode only.
8. 5G NR n41 single carrier supports HPUE mode.
9. 5G NR n41 SISO mode support Antenna switch for Ant.8 / Ant.7.
10. 5G NR n41 UL MIMO mode support Antenna switch for Ant.8+1 / Ant.8+2 / Ant.7+1 / Ant.7+2, conducted items only test Ant.8+1 by referring to highest output power, RSE verify all the four MIMO antenna and only show the worst Ant.8+2 in the report.
11. For n41 MIMO mode, the conducted Bandedge/Spurious are tested MIMO mode at single antenna port and add 10*log(N_{ANT}) to the test results according to KDB 662911 D01.
12. 5G NR n41 supports UL-MIMO for CP-OFDM modulation, the MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.
13. The EN-DC mode combination could be referred to the product spec.
14. when temperature lower than -10 °C, EUT will be shut down automatically, thus Frequency Stability item only test -10~50 °C.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n7		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.2576	4M48G7D	0.1968	4M49W7D
10	2505.0 ~ 2565.0	0.2512	9M29G7D	0.1945	9M30W7D
15	2507.5 ~ 2562.5	0.2612	14M1G7D	0.2084	14M1W7D
20	2510.0 ~ 2560.0	0.2649	18M9G7D	0.2061	19M0W7D

5G NR n38		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	2580.0 ~ 2610.0	0.1574	18M2G7D	0.1268	18M2W7D
30	2585.0 ~ 2605.0	0.1600	27M8G7D	0.1288	27M9W7D
40	2590.0 ~ 2600.0	0.1637	37M8G7D	0.1300	37M8W7D

5G NR n41 (HPUE)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	2506.02 ~ 2679.99	0.2377	18M2G7D	0.1888	18M2W7D
30	2511.00 ~ 2674.98	0.2438	27M8G7D	0.1941	27M9W7D
40	2516.01 ~ 2670.00	0.2432	37M8G7D	0.1941	37M8W7D
50	2521.02 ~ 2664.99	0.2393	47M5G7D	0.1932	47M6W7D
60	2526.00 ~ 2659.98	0.2388	58M0G7D	0.1923	58M0W7D
70	2531.01 ~ 2655.00	0.2350	67M5G7D	0.1901	67M7W7D
80	2536.02 ~ 2649.99	0.2317	77M5G7D	0.1871	77M7W7D
90	2541.00 ~ 2644.98	0.2377	87M5G7D	0.1897	87M7W7D
100	2546.01 ~ 2640.00	0.2547	97M6G7D	0.2084	97M8W7D

5G NR n41 UL MIMO		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	2506.02 ~ 2679.99	0.3319	18M2G7D	0.2931	18M3W7D
30	2511.00 ~ 2674.98	0.3327	27M9G7D	0.2944	27M9W7D
40	2516.01 ~ 2670.00	0.3436	37M8G7D	0.3013	37M9W7D
50	2521.02 ~ 2664.99	0.3334	47M6G7D	0.2844	47M5W7D
60	2526.00 ~ 2659.98	0.3334	57M8G7D	0.2864	58M0W7D
70	2531.01 ~ 2655.00	0.3243	67M4G7D	0.2793	67M6W7D
80	2536.02 ~ 2649.99	0.3221	77M4G7D	0.2805	77M6W7D
90	2541.00 ~ 2644.98	0.3289	87M4G7D	0.2812	87M7W7D
100	2546.01 ~ 2640.00	0.3573	97M5G7D	0.3069	97M7W7D

5G NR n66		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1712.5 ~ 1777.5	0.4130	4M49G7D	0.3281	4M49W7D
10	1715.0 ~ 1775.0	0.4140	9M28G7D	0.3243	9M30W7D
15	1717.5 ~ 1772.5	0.4178	14M1G7D	0.3388	14M1W7D
20	1720.0 ~ 1770.0	0.4198	18M9G7D	0.3357	19M0W7D
30	1725.0 ~ 1765.0	0.4246	28M6G7D	0.3436	28M5W7D

Note:

1. 5G NR n41 overlaps the entire frequency range of 5G NR n38. Therefore, the test results provided in this report covers 5G NR n41 as well as 5G NR n38.
2. All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22, 24, 27
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane

Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n7	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n38	-	-	-	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n41	-	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	-	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n7				v	-	-	-	-	-	-	-	-	-	v	v				v	v	v	v	v
	n41	-		-	v	-									v	v				v	v	v	v	v
	n66				v	-	-	-	-	-	-	-	-	-	v	v				v	v	v	v	v
26dB and 99% Bandwidth	n7	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v		v		v	
	n41	-	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v		v		v	
	n66	v	v	v	v	-	v	-	-	-	-	-	-	-	v	v	v	v	v		v		v	

Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H
Conducted Band Edge	n7	v			v	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v
	n41	-	-	-	v	-				v				v	v	v				v	v	v		v
	n66	v			v	-		-	-	-	-	-	-	-	v	v				v	v	v		v
Conducted Spurious Emission	n7	v			v	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v
	n41	-	-	-	v	-				v				v	v	v				v		v	v	v
	n66	v			v	-		-	-	-	-	-	-	-	v	v				v		v	v	v
Frequency Stability	n7				v	-	-	-	-	-	-	-	-	-		v					v		v	
	n41	-	-	-	v	-										v					v		v	
	n66				v	-		-	-	-	-	-	-	-		v					v		v	
E.R.P / E.I.R.P	n7	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n38	-	-	-	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n41	-	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	-	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n7	Worst Case																					v	
	n41	Worst Case																					v	
	n66	Worst Case																					v	

Note

1. The mark "**v** " means that this configuration is chosen for testing.
2. The mark "-" means that this bandwidth is not supported.
3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB. size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
4. For Frequency Stability item, Normal Voltage =7.78 V, Battery End Point (BEP) =7.3 V, Maximum Voltage =8.7 V.

2.2 Connection Diagram of Test System

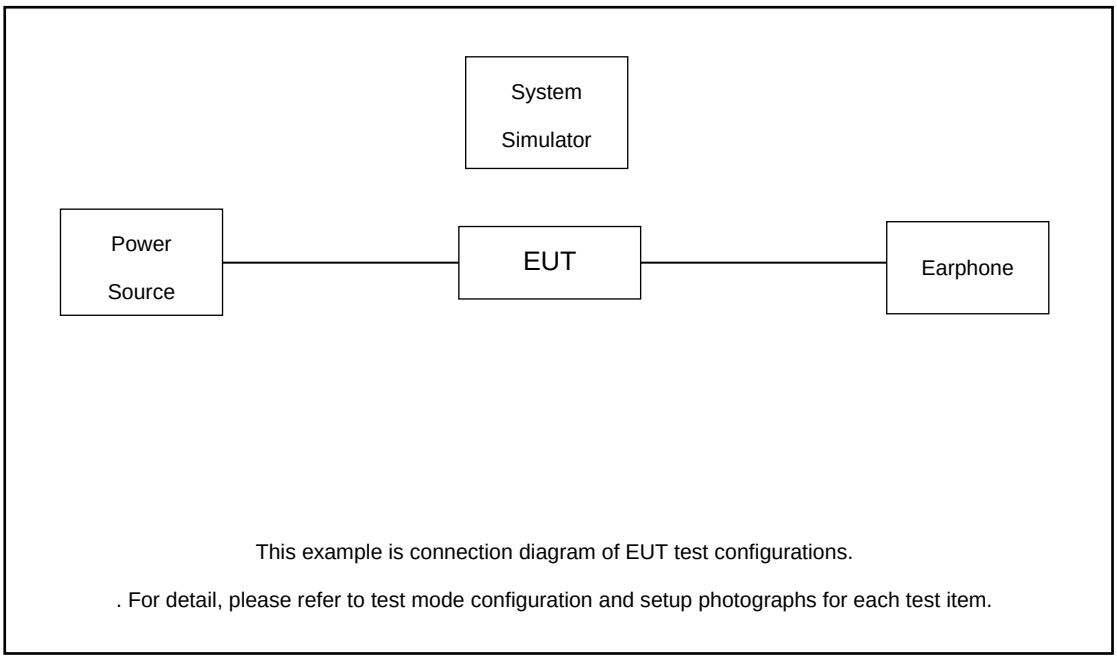

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.4 dB.

Example :

Offset(dB) = RF cable loss(dB).

= 8.4 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G NR n7 Channel and Frequency List				
BW [MHz]	**Channel/Frequency(MHz)**	**Lowest**	**Middle**	**Highest**
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n38 Channel and Frequency List				
BW [MHz]	**Channel/Frequency(MHz)**	**Lowest**	**Middle**	**Highest**
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610

5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99

5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

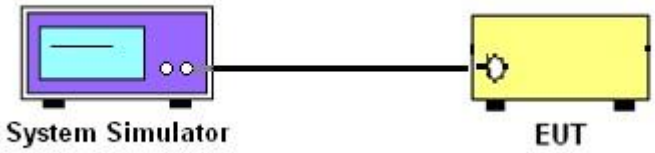

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

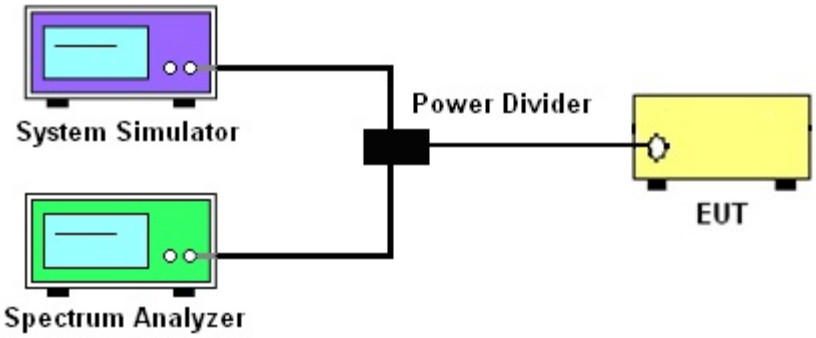

3.2.3 Frequency Stability

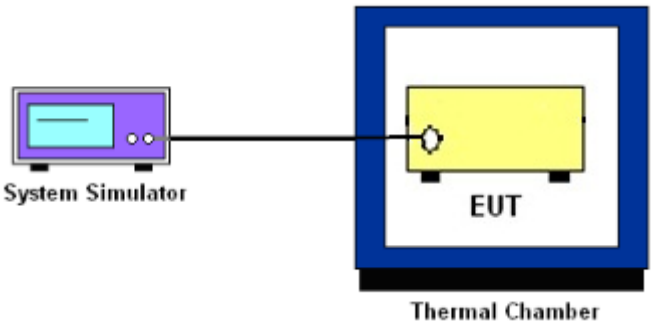

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n7, n38, n41.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66.

According to KDB 412172 D01 Power Approach,

EIRP = $P_T + G_T – L_C$, ERP = EIRP -2.15, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
   (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “–X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is 43 + 10log$_{10}$(P[Watts]) dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

   Example:

   The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

   = P(W)- [43 + 10log(P)] (dB)

   = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.

   When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For 5G NR n7/n38/n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [43 + 10log(P)] (dB)
    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
    = -13dBm.
11. For 5G NR n7/n38/n41
    The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [55+ 10log(P)] (dB)
    = [30+ 10log(P)] (dBm) - [55+ 10log(P)] (dB)
    = -25dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -10°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments

See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test below 30MHz

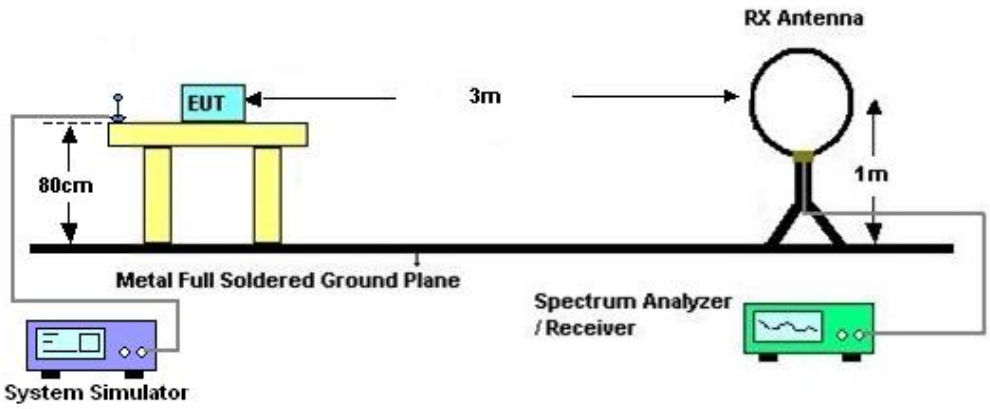

4.2.2 For radiated test from 30MHz to 1GHz

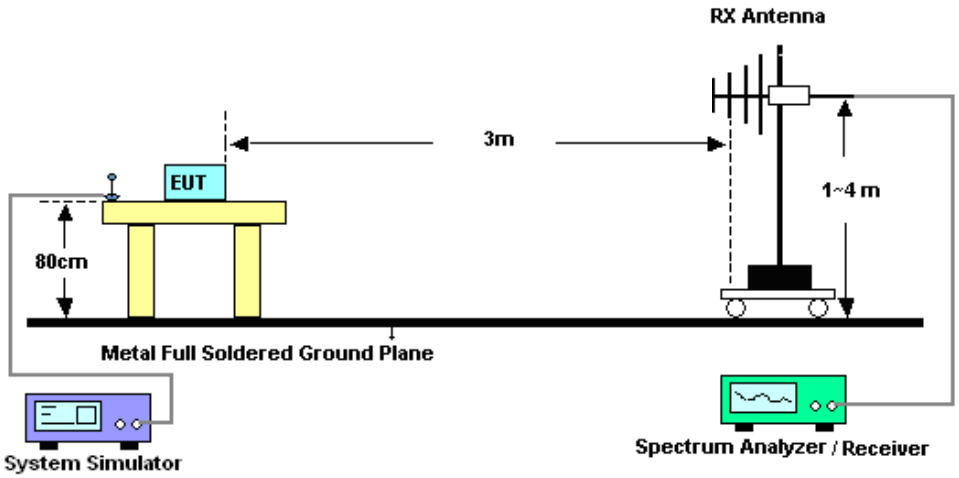

4.2.3 For radiated test above 1GHz

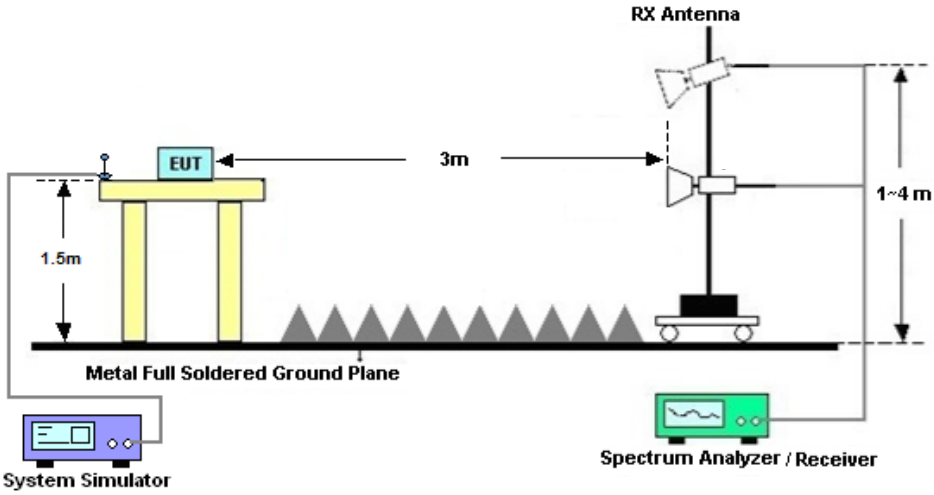

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For 5G NR n7/n38/n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
    The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [43 + 10log(P)] (dB)
    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
    = -13dBm.
13. For 5G NR n7/n38/n41:
    The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Feb. 05, 2023~ Feb. 27, 2023	Apr. 06, 2023	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2022	Feb. 05, 2023~ Feb. 27, 2023	Dec. 24, 2023	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 07, 2022	Feb. 05, 2023~ Feb. 27, 2023	Jul. 06, 2023	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 26, 2022	Feb. 10, 2023	Dec. 25, 2023	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Feb. 10, 2023	Jul. 06, 2023	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Feb. 10, 2023	Jul. 27, 2023	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Sep. 28, 2022	Feb. 10, 2023	Sep. 27, 2023	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Feb. 10, 2023	Jul. 06, 2023	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 10, 2022	Feb. 10, 2023	Apr. 09, 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Feb. 10, 2023	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Feb. 10, 2023	Oct. 18, 2023	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 19, 2022	Feb. 10, 2023	Oct. 18, 2023	Radiation (03CH01-SZ
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 06, 2022	Feb. 10, 2023	Jul. 05, 2023	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	Nov. 10, 2022	Feb. 10, 2023	Nov. 09, 2023	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 10, 2023	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 10, 2023	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.48dB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.53dB

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.02dB

---------- THE END ----------

Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Kuo	**Temperature :**	22~23℃
		Relative Humidity :	40~42%

Software Version: 22.12.120701

FR1 N7 (ANT1)

Transmitter Conducted Output Power And EIRP, (G_T - L_C)=-0.36dBi

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@1	24.47	24.11	0.2576
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	1@1	23.3	22.94	0.1968
7	15	5	507000	2535	DFT-s-OFDM QPSK	1@1	24.42	24.06	0.2547
7	15	5	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.21	22.85	0.1928
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@1	24.2	23.84	0.2421
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	1@1	23.02	22.66	0.1845
7	15	10	501000	2505	DFT-s-OFDM QPSK	1@1	24.36	24	0.2512
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	1@1	23.22	22.86	0.1932
7	15	10	507000	2535	DFT-s-OFDM QPSK	1@1	24.33	23.97	0.2495
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.25	22.89	0.1945
7	15	10	513000	2565	DFT-s-OFDM QPSK	1@1	24.22	23.86	0.2432
7	15	10	513000	2565	DFT-s-OFDM 16 QAM	1@1	23.1	22.74	0.1879
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@1	24.52	24.16	0.2606
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	1@1	23.55	23.19	0.2084
7	15	15	507000	2535	DFT-s-OFDM QPSK	1@1	24.53	24.17	0.2612
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.37	23.01	0.2000
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@1	24.46	24.1	0.2570
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	1@1	23.33	22.97	0.1982
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	50@25	24.39	24.03	0.2529
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	1@1	24.44	24.08	0.2559
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	1@104	24.31	23.95	0.2483
7	15	20	502000	2510	DFT-s-OFDM QPSK	50@25	24.44	24.08	0.2559
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@1	24.59	24.23	0.2649
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@104	24.31	23.95	0.2483
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	50@25	23.39	23.03	0.2009
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@1	23.5	23.14	0.2061
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@104	23.39	23.03	0.2009
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	50@25	21.9	21.54	0.1426
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	1@1	22.12	21.76	0.1500

7	15	20	502000	2510	DFT-s-OFDM 64 QAM	1@104	22.01	21.65	0.1462
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	50@25	19.81	19.45	0.0881
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	1@1	19.66	19.3	0.0851
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	1@104	19.61	19.25	0.0841
7	15	20	502000	2510	CP-OFDM QPSK	53@26	22.91	22.55	0.1799
7	15	20	502000	2510	CP-OFDM QPSK	1@1	23.03	22.67	0.1849
7	15	20	502000	2510	CP-OFDM QPSK	1@104	22.94	22.58	0.1811
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	50@25	24.44	24.08	0.2559
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.37	24.01	0.2518
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	1@104	24.3	23.94	0.2477
7	15	20	507000	2535	DFT-s-OFDM QPSK	50@25	24.3	23.94	0.2477
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@1	24.47	24.11	0.2576
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@104	24.37	24.01	0.2518
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	50@25	23.3	22.94	0.1968
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.47	23.11	0.2046
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@104	23.38	23.02	0.2004
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	50@25	21.84	21.48	0.1406
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	1@1	22.08	21.72	0.1486
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	1@104	21.98	21.62	0.1452
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	50@25	19.83	19.47	0.0885
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.57	19.21	0.0834
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	1@104	19.54	19.18	0.0828
7	15	20	507000	2535	CP-OFDM QPSK	53@26	22.81	22.45	0.1758
7	15	20	507000	2535	CP-OFDM QPSK	1@1	22.93	22.57	0.1807
7	15	20	507000	2535	CP-OFDM QPSK	1@104	22.51	22.15	0.1641
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	50@25	24.18	23.82	0.2410
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	1@1	24.3	23.94	0.2477
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	1@104	24.08	23.72	0.2355
7	15	20	512000	2560	DFT-s-OFDM QPSK	50@25	24.19	23.83	0.2415
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@1	24.46	24.1	0.2570
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@104	24.06	23.7	0.2344
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	50@25	23.2	22.84	0.1923
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@1	23.3	22.94	0.1968
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@104	23.2	22.84	0.1923
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	50@25	21.72	21.36	0.1368

7	15	20	512000	2560	DFT-s-OFDM 64 QAM	1@1	22.01	21.65	0.1462
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	1@104	21.82	21.46	0.1400
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	50@25	21.64	21.28	0.1343
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	1@1	19.6	19.24	0.0839
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	1@104	19.33	18.97	0.0789
7	15	20	512000	2560	CP-OFDM QPSK	53@26	22.71	22.35	0.1718
7	15	20	512000	2560	CP-OFDM QPSK	1@1	22.93	22.57	0.1807
7	15	20	512000	2560	CP-OFDM QPSK	1@104	22.39	22.03	0.1596

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0047	**PASS**	NV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0048	**PASS**	LV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0025	**PASS**	HV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0063	**PASS**	-10℃
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0021	**PASS**	0℃
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0038	**PASS**	10℃
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0047	**PASS**	20℃
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0023	**PASS**	30℃
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0050	**PASS**	40℃
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0035	**PASS**	50℃

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
7	15	20	502000	2510.0	DFT-s-OFDM PI/2 BPSK	100@0	4.04	13	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM PI/2 BPSK	1@0	4.39	13	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	100@0	4.7	13	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	3.93	13	**PASS**
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	4.17	13	**PASS**
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	1@0	4.26	13	**PASS**
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	4.67	13	**PASS**
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	3.84	13	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM PI/2 BPSK	100@0	3.89	13	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM PI/2 BPSK	1@0	4.46	13	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	100@0	4.51	13	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@0	4.18	13	**PASS**

N7(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

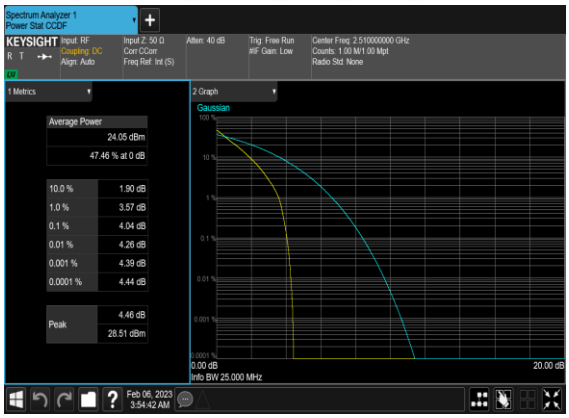

N7(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

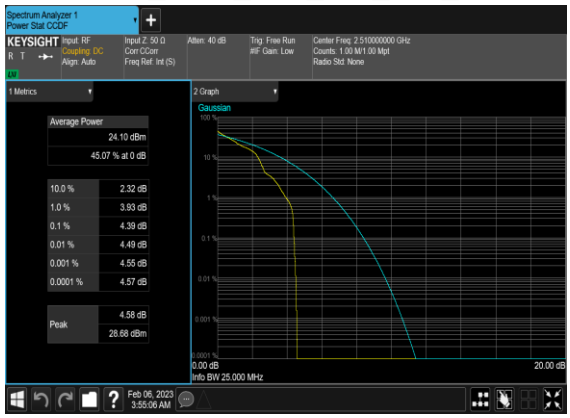

N7(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

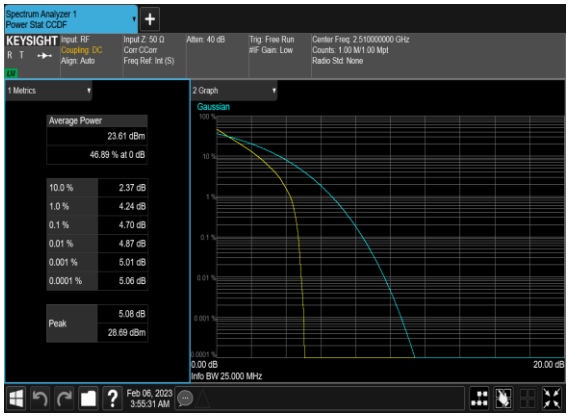

N7(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

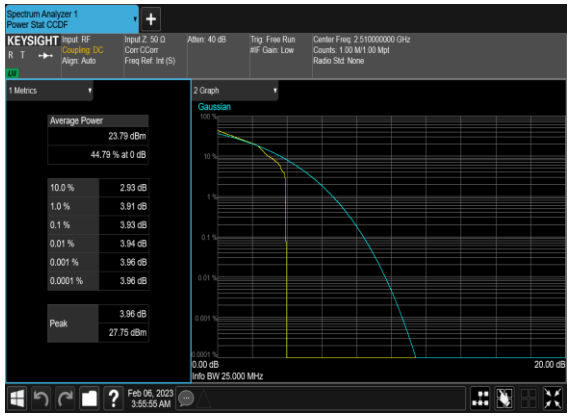

N7(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

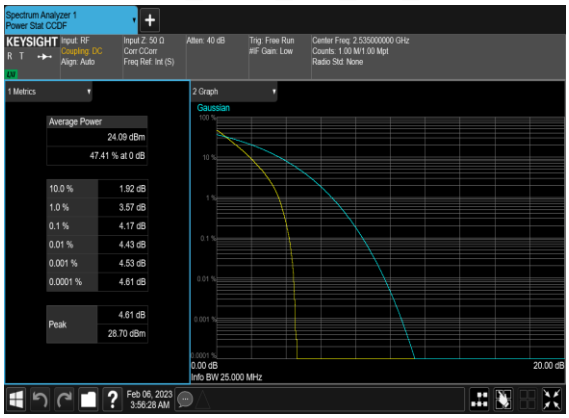

N7(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

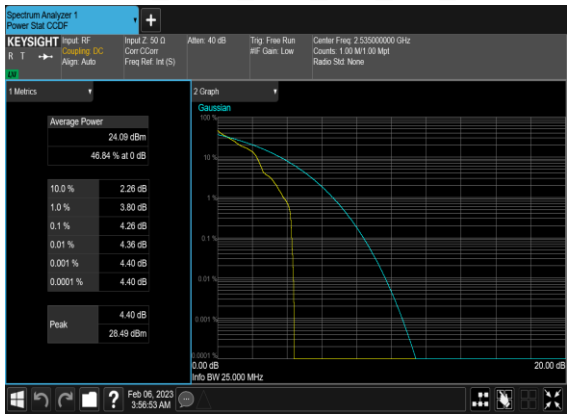

N7(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

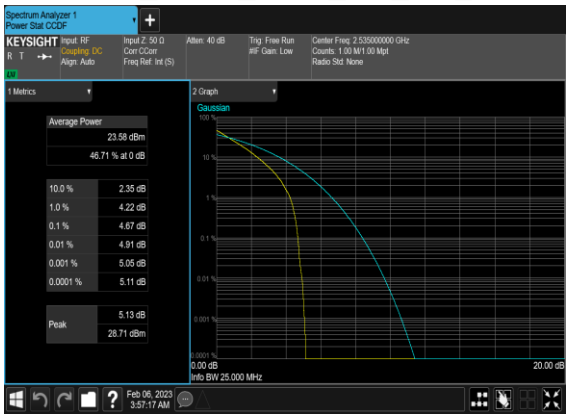

N7(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

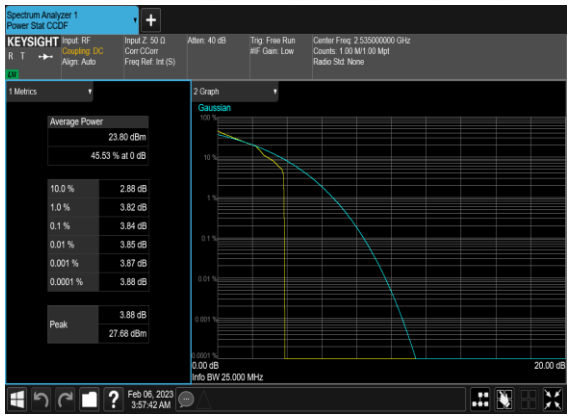

N7(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

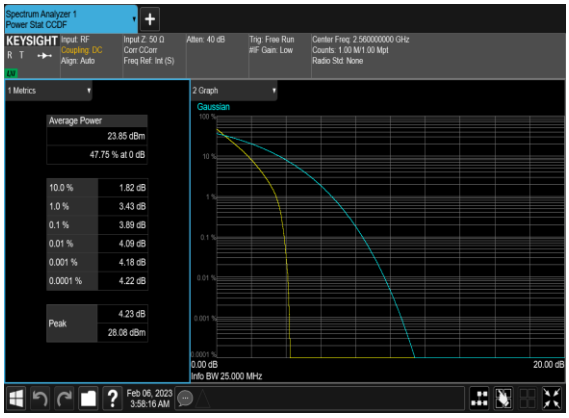

N7(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

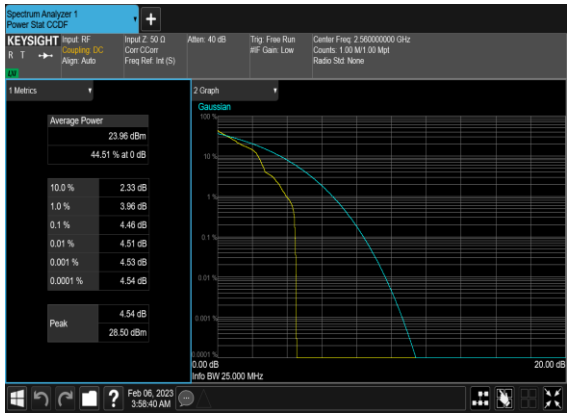

N7(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

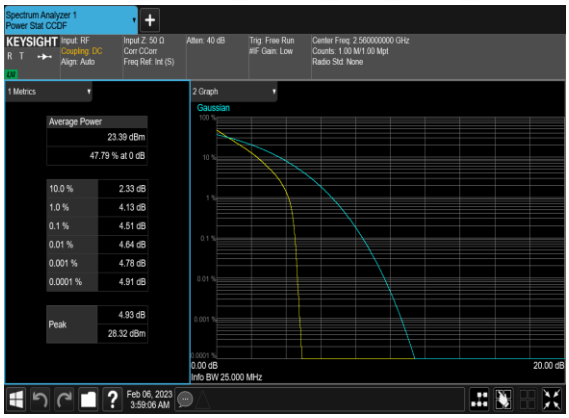

N7(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

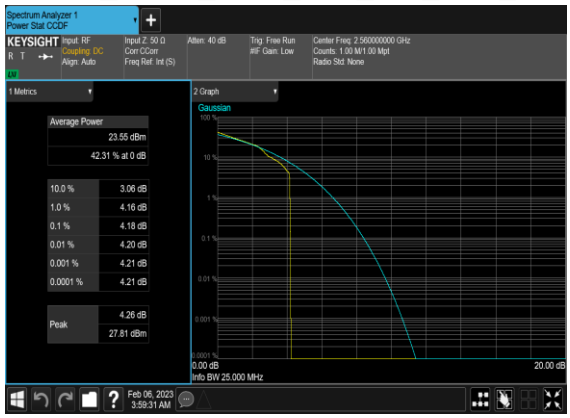

Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
7	15	5	507000	2535.0	DFT-s-OFDM PI/2 BPSK	25@0	4.4828	4.925
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	25@0	4.4748	5.04
7	15	5	507000	2535.0	CP-OFDM QPSK	25@0	4.4653	5.197
7	15	5	507000	2535.0	CP-OFDM 16 QAM	25@0	4.4932	5.126
7	15	5	507000	2535.0	CP-OFDM 64 QAM	25@0	4.4616	4.944
7	15	5	507000	2535.0	CP-OFDM 256 QAM	25@0	4.4826	5.065
7	15	10	507000	2535.0	DFT-s-OFDM PI/2 BPSK	50@0	8.8895	9.567
7	15	10	507000	2535.0	DFT-s-OFDM QPSK	50@0	8.9036	9.683
7	15	10	507000	2535.0	CP-OFDM QPSK	52@0	9.2876	9.973
7	15	10	507000	2535.0	CP-OFDM 16 QAM	52@0	9.2986	10.08
7	15	10	507000	2535.0	CP-OFDM 64 QAM	52@0	9.2832	9.991
7	15	10	507000	2535.0	CP-OFDM 256 QAM	52@0	9.2857	10.0
7	15	15	507000	2535.0	DFT-s-OFDM PI/2 BPSK	75@0	13.381	14.45
7	15	15	507000	2535.0	DFT-s-OFDM QPSK	75@0	13.394	14.12
7	15	15	507000	2535.0	CP-OFDM QPSK	79@0	14.117	15.03
7	15	15	507000	2535.0	CP-OFDM 16 QAM	79@0	14.102	15.02
7	15	15	507000	2535.0	CP-OFDM 64 QAM	79@0	14.064	14.98
7	15	15	507000	2535.0	CP-OFDM 256 QAM	79@0	14.084	14.93
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	17.931	18.73
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	17.827	18.71
7	15	20	507000	2535.0	CP-OFDM QPSK	106@0	18.913	19.89
7	15	20	507000	2535.0	CP-OFDM 16 QAM	106@0	18.946	19.7
7	15	20	507000	2535.0	CP-OFDM 64 QAM	106@0	18.876	19.75
7	15	20	507000	2535.0	CP-OFDM 256 QAM	106@0	18.919	19.78

N7(5M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

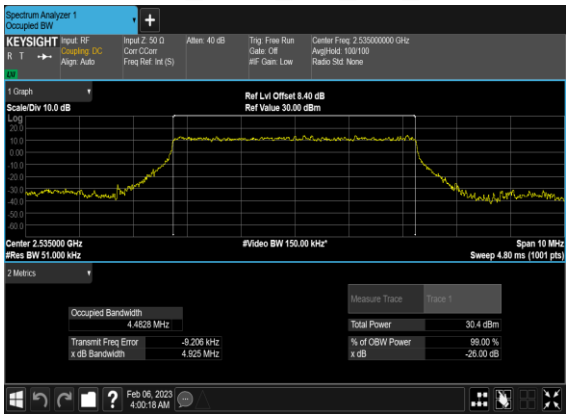

N7(5M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

N7(5M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

N7(5M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

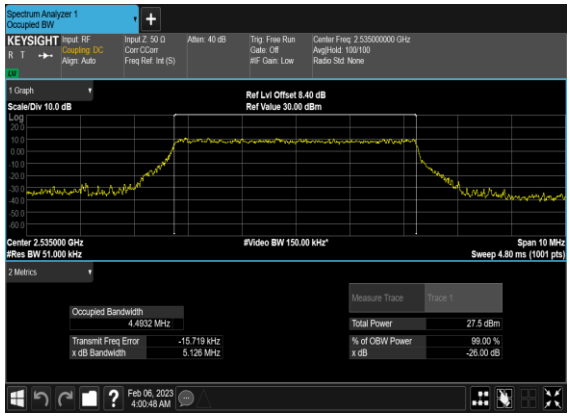

N7(5M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

N7(5M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

N7(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

N7(10M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

N7(10M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

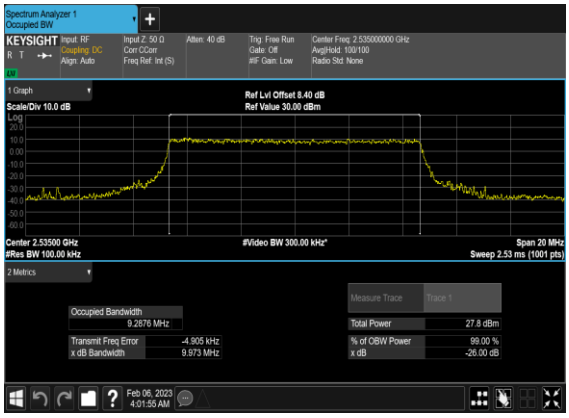

N7(10M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

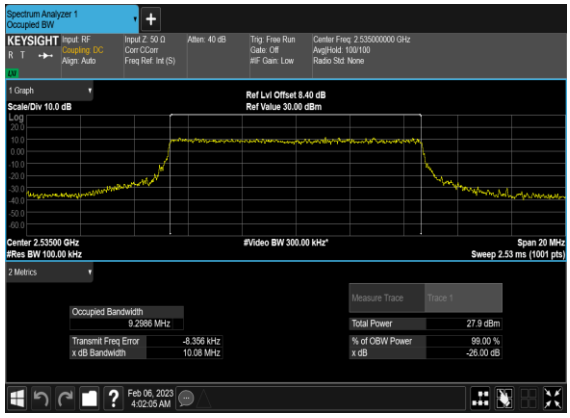

N7(10M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

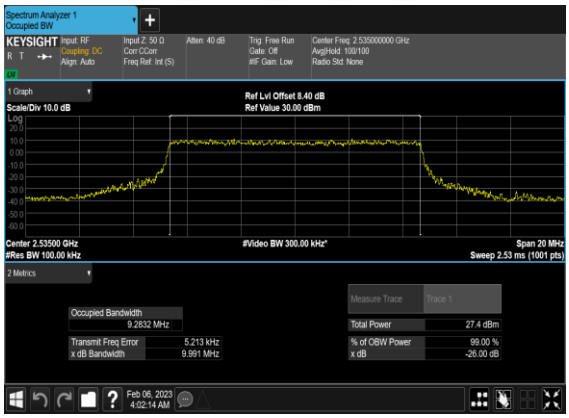

N7(10M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

N7(15M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

N7(15M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

N7(15M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

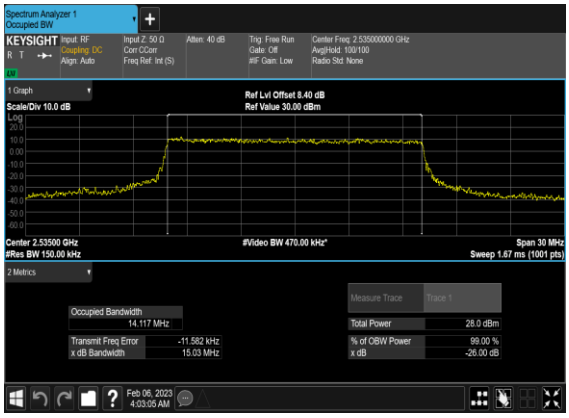

N7(15M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

N7(15M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

N7(15M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

N7(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

N7(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

N7(20M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

N7(20M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

N7(20M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

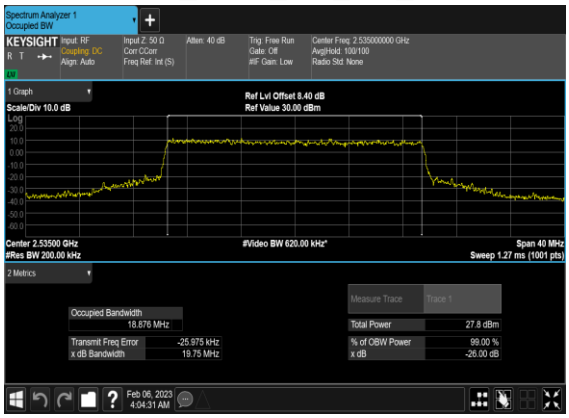

N7(20M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

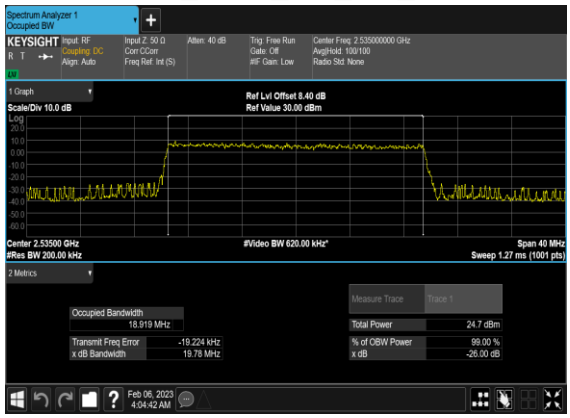

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	**---**
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	**---**
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	**---**
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	**---**
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	10	501000	2505.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
7	15	10	501000	2505.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	10	501000	2505.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	10	501000	2505.0	DFT-s-OFDM QPSK	1@0	see graph	**---**

7	15	10	501000	2505.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	10	501000	2505.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	10	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
7	15	10	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	10	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	10	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
7	15	10	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	10	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	10	513000	2565.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
7	15	10	513000	2565.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	10	513000	2565.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	10	513000	2565.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
7	15	10	513000	2565.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	10	513000	2565.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	20	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
7	15	20	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	20	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	**---**

7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**

N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

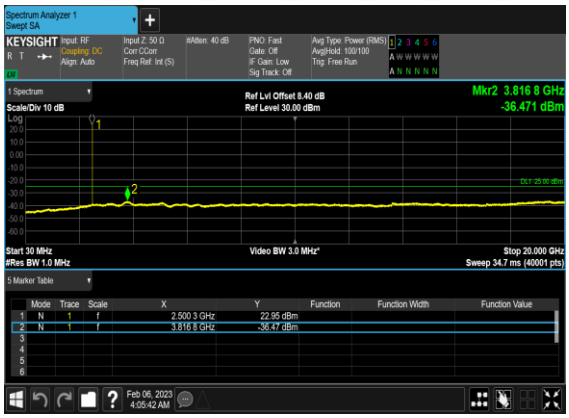

N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

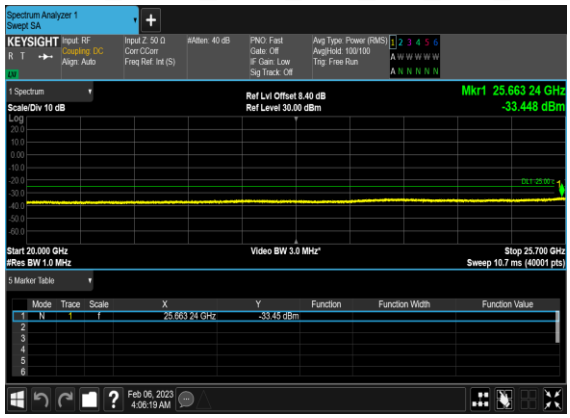

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

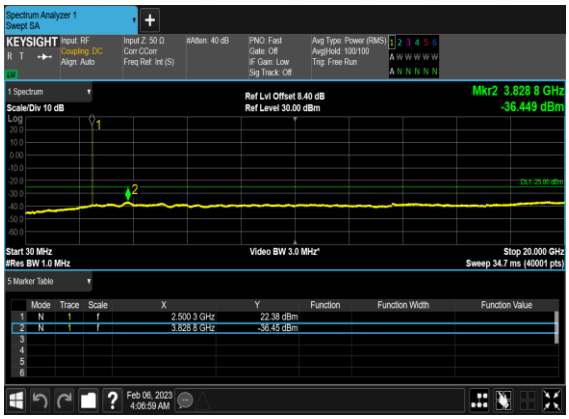

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

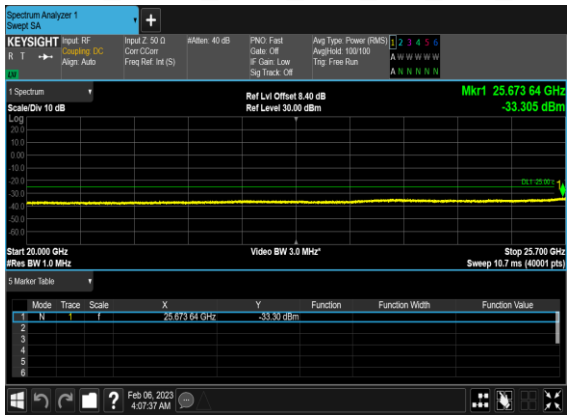

N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

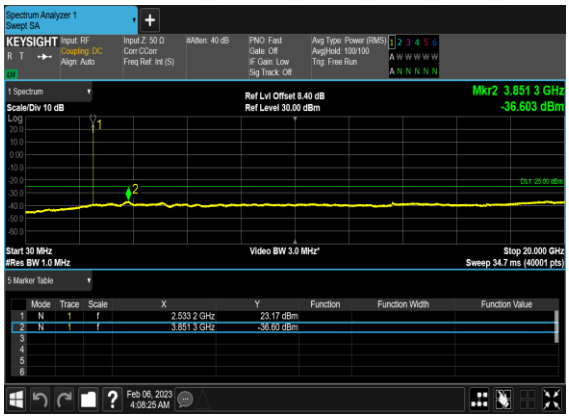

N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

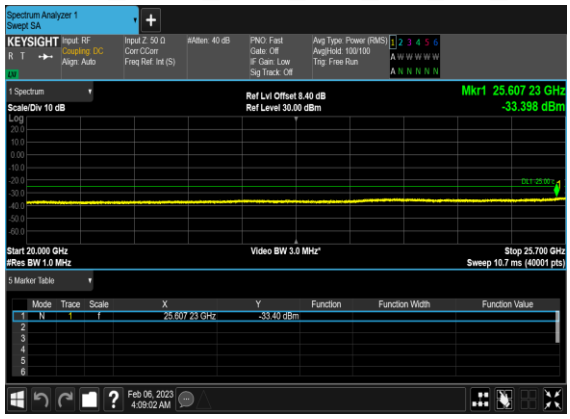

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

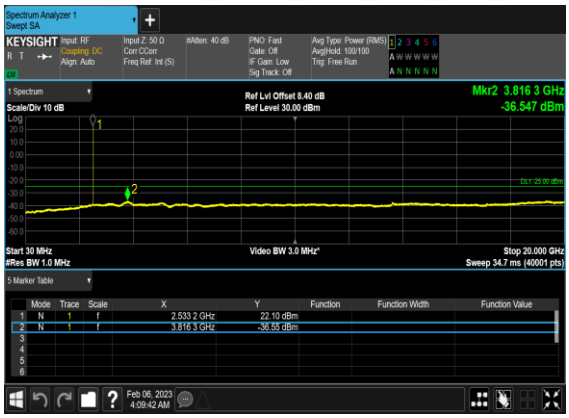

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

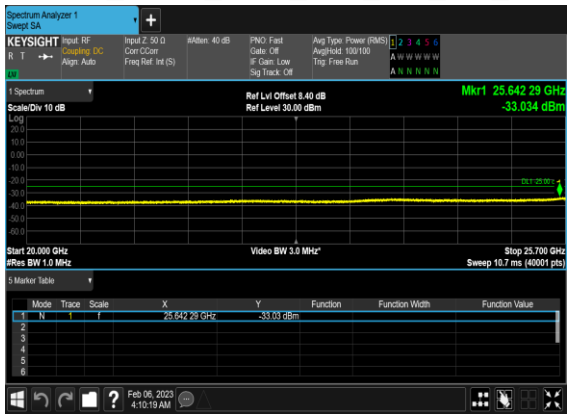

N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

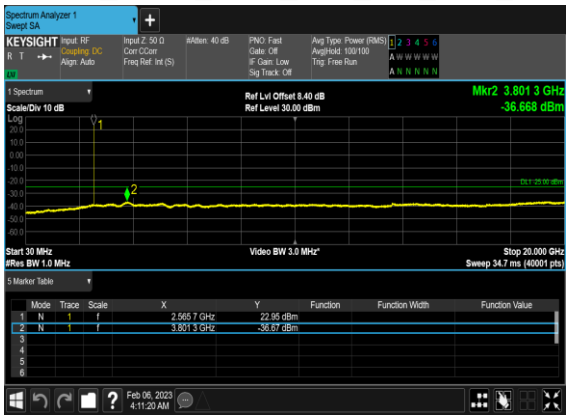

N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

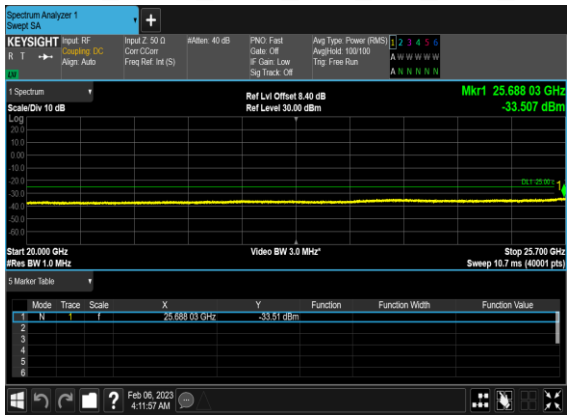

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

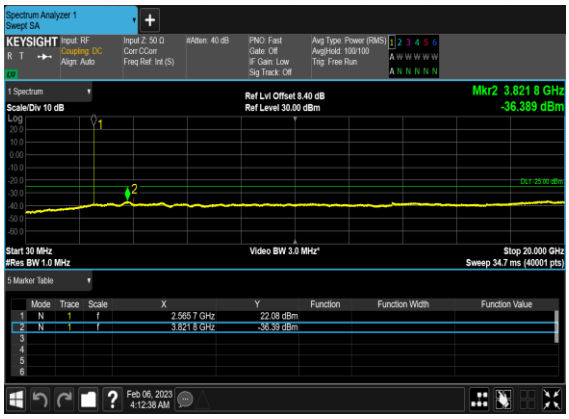

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

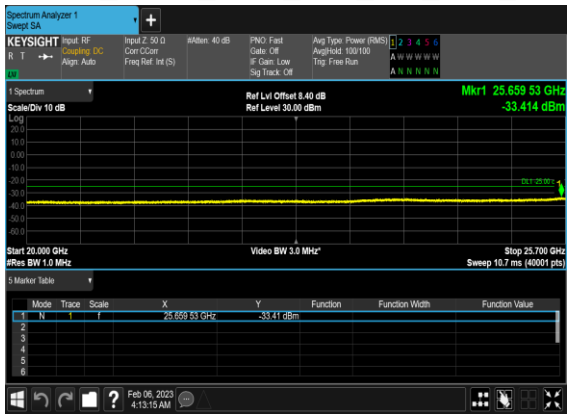

N7(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

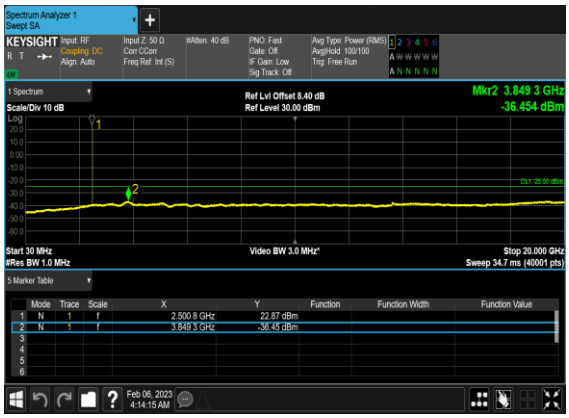

N7(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

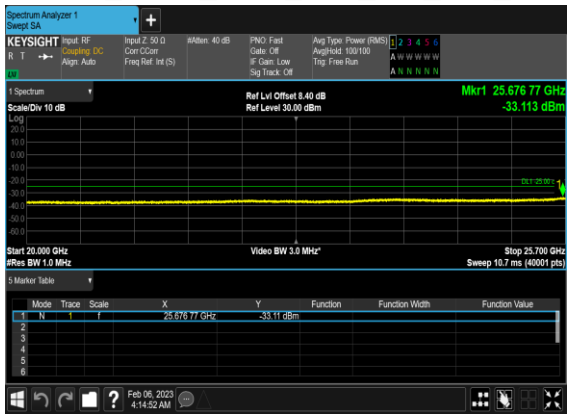

N7(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

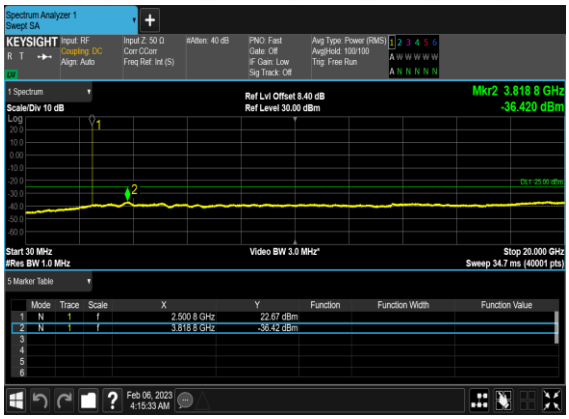

N7(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

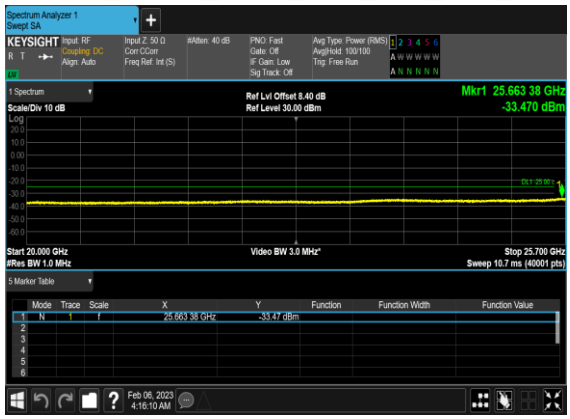

N7(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

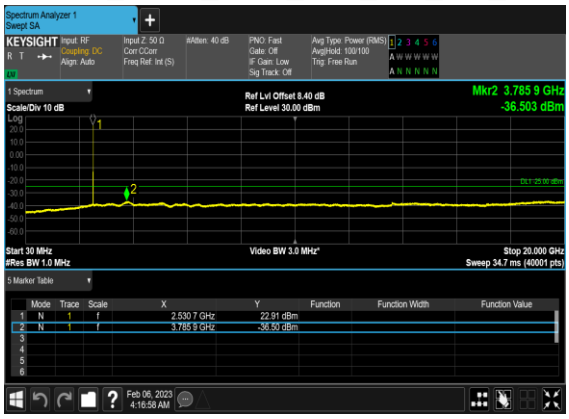

N7(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

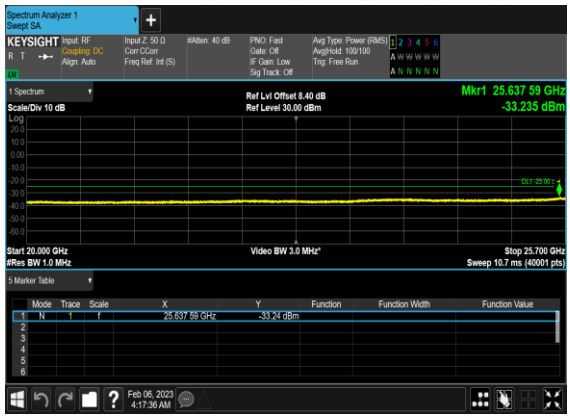

N7(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

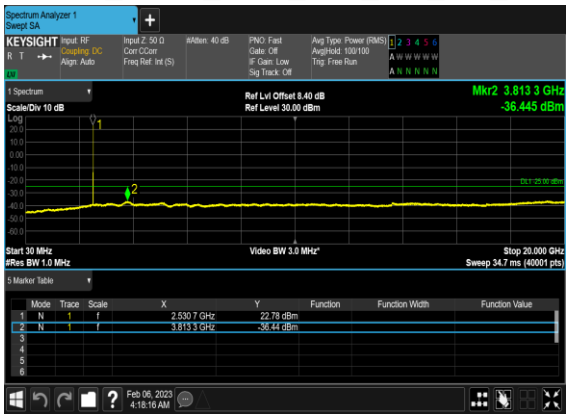

N7(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

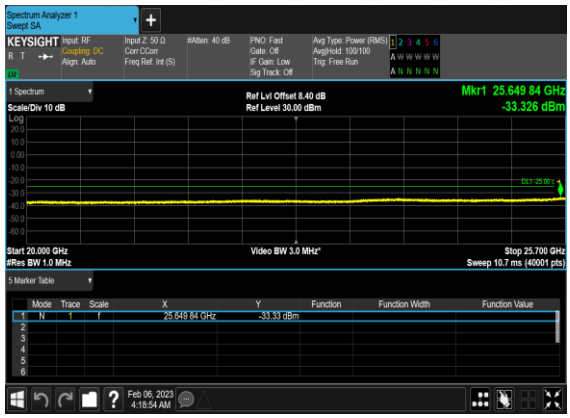

N7(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

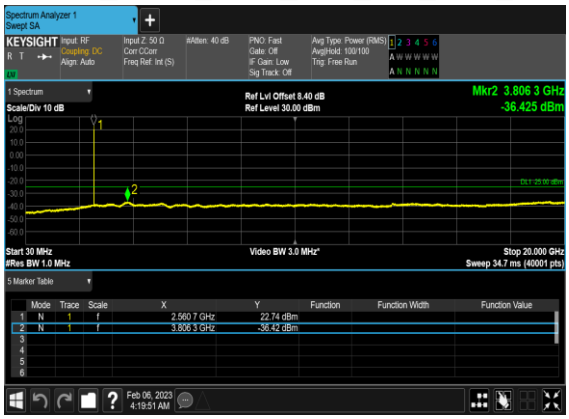

N7(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

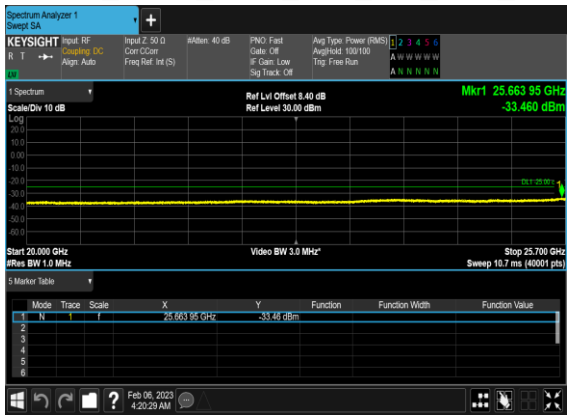

N7(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

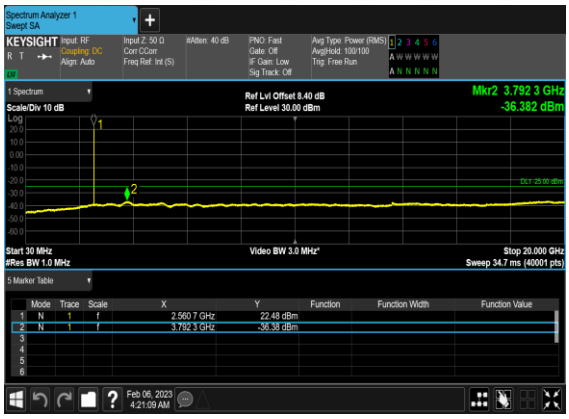

N7(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

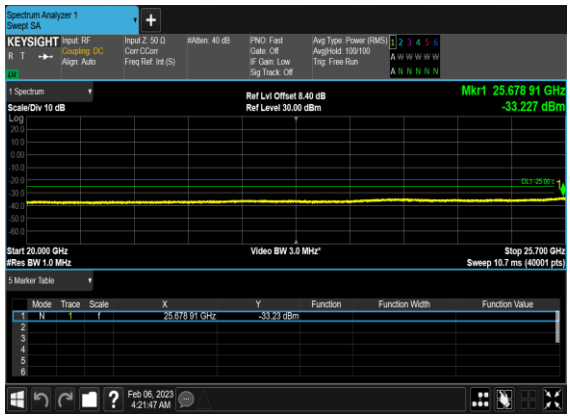

N7(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

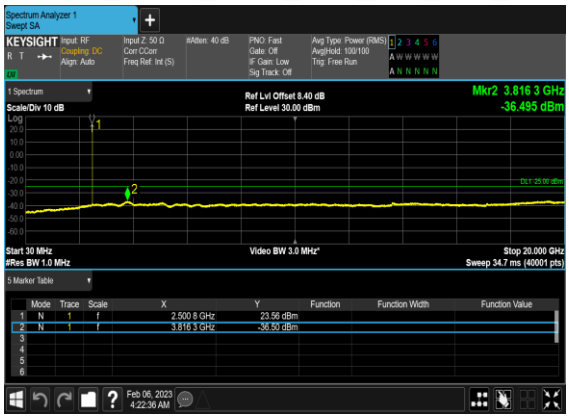

N7(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

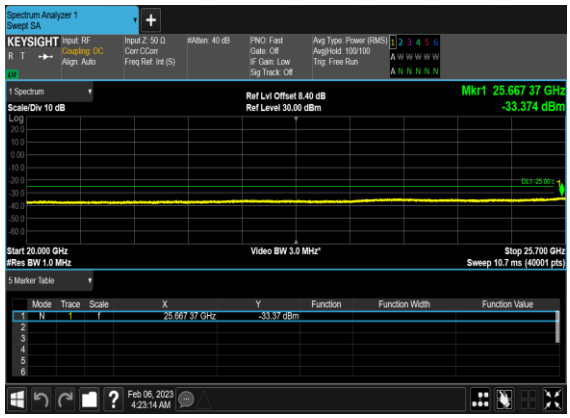

N7(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

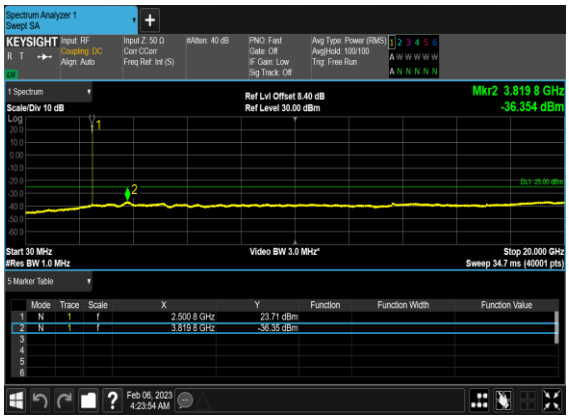

N7(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

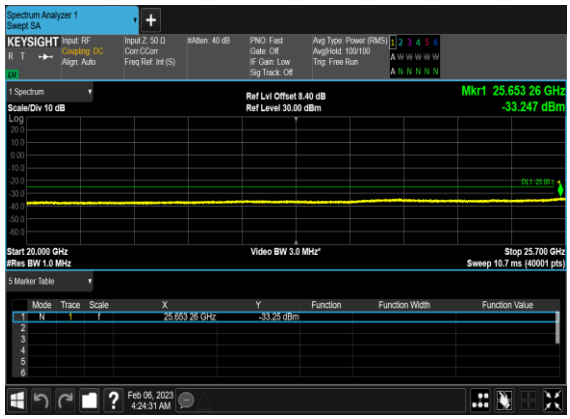

N7(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

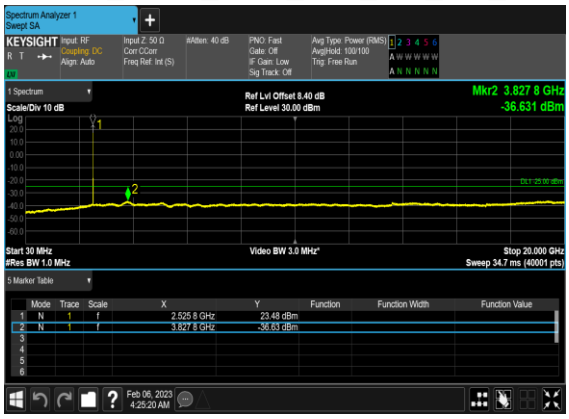

N7(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

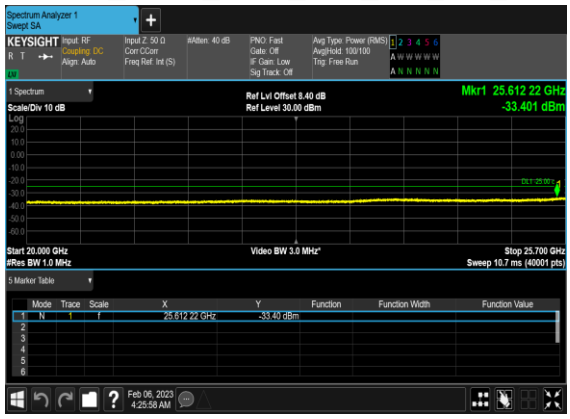

N7(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

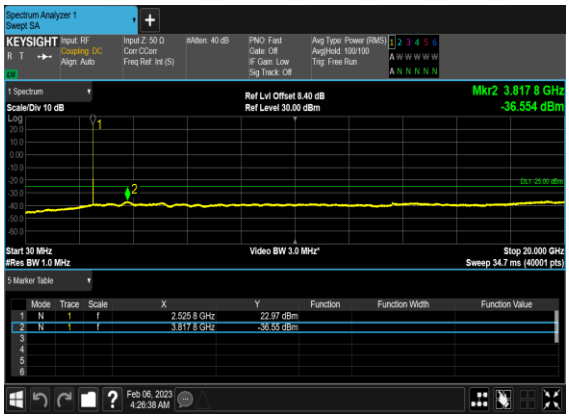

N7(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

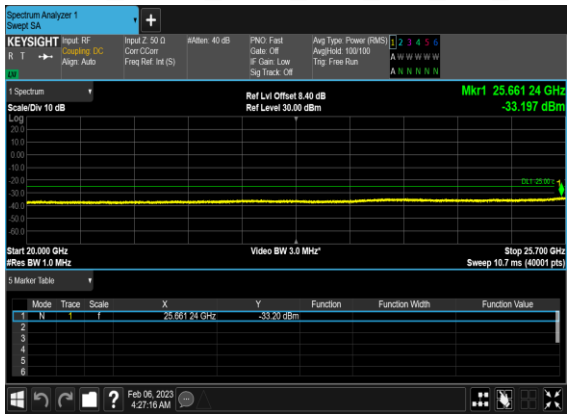

N7(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

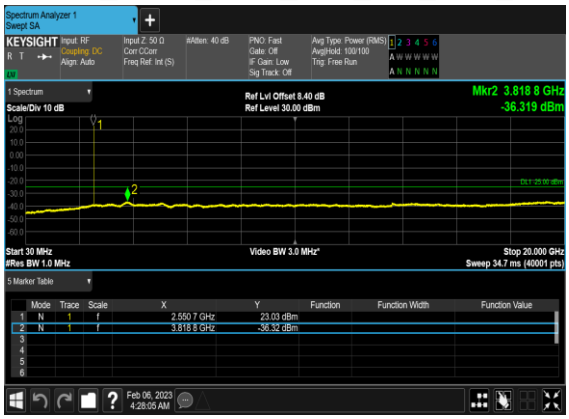

N7(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

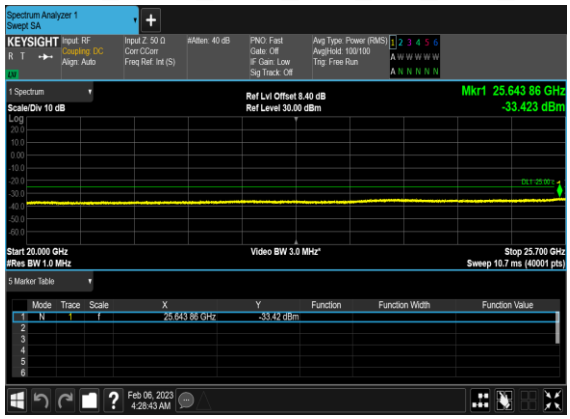

N7(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

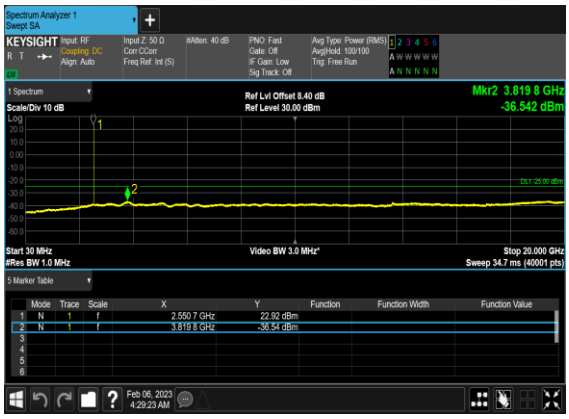

N7(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

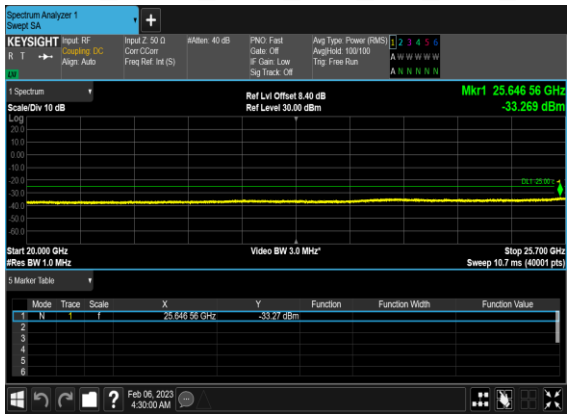

Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	25@0	see graph	**PASS**
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	25@0	see graph	**PASS**
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@24	see graph	**PASS**
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@24	see graph	**PASS**
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	25@0	see graph	**PASS**
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	25@0	see graph	**PASS**
7	15	10	501000	2505.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	10	501000	2505.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	10	501000	2505.0	DFT-s-OFDM BPSK	50@0	see graph	**PASS**
7	15	10	501000	2505.0	DFT-s-OFDM QPSK	50@0	see graph	**PASS**
7	15	10	513000	2565.0	DFT-s-OFDM BPSK	1@51	see graph	**PASS**
7	15	10	513000	2565.0	DFT-s-OFDM QPSK	1@51	see graph	**PASS**
7	15	10	513000	2565.0	DFT-s-OFDM BPSK	50@0	see graph	**PASS**
7	15	10	513000	2565.0	DFT-s-OFDM QPSK	50@0	see graph	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	100@0	see graph	**PASS**
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	100@0	see graph	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@105	see graph	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@105	see graph	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	100@0	see graph	**PASS**
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	100@0	see graph	**PASS**

N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

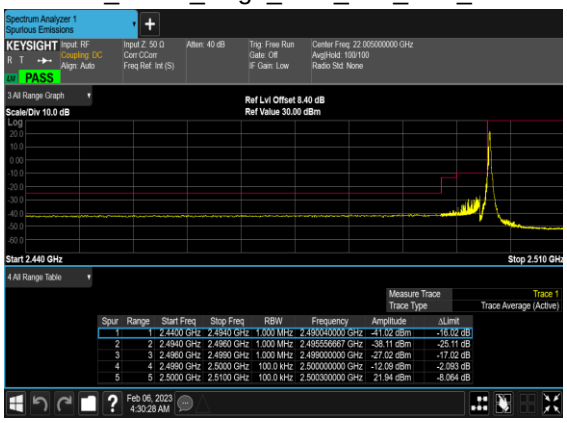

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

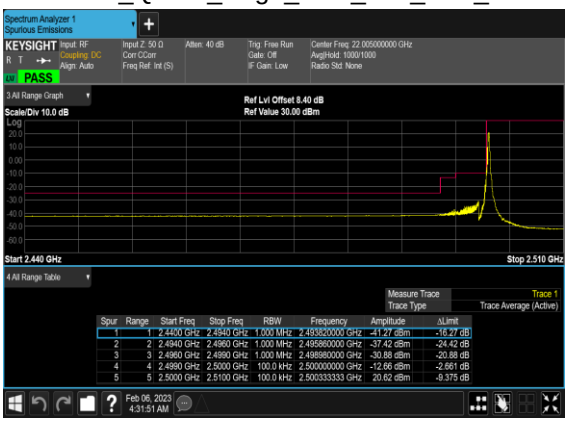

N7(5M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

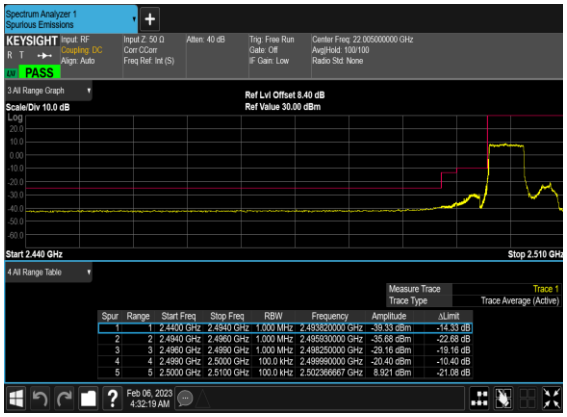

N7(5M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

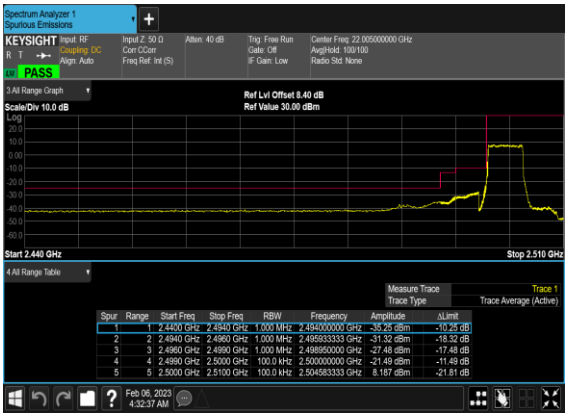

N7(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

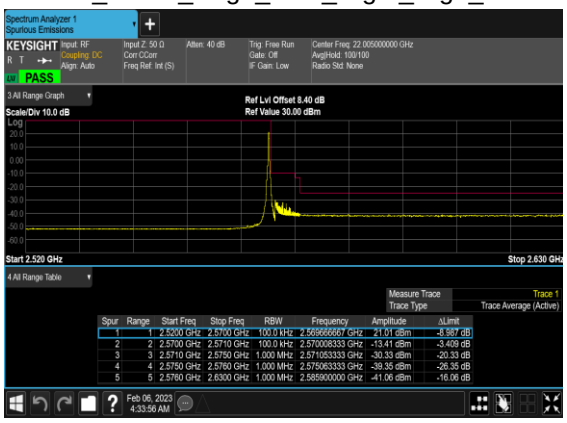

N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

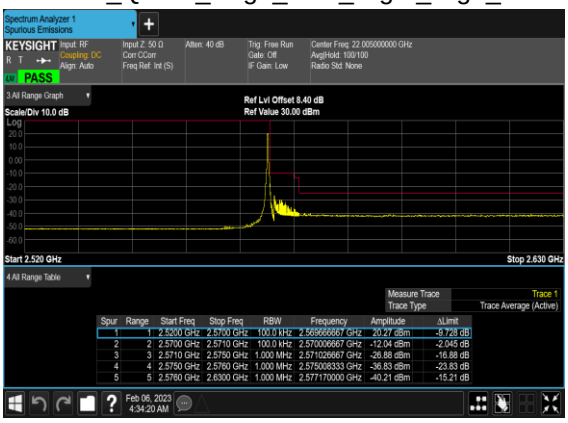

N7(5M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

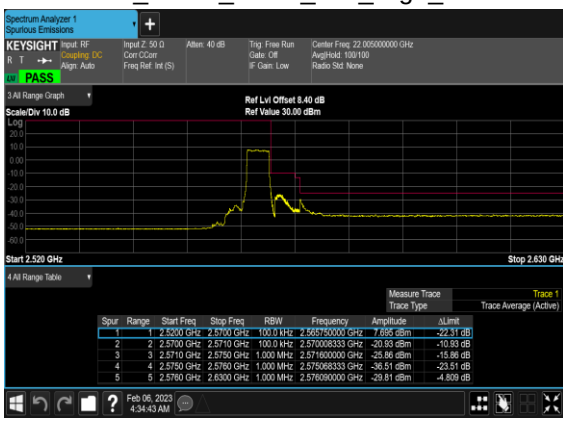

N7(5M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

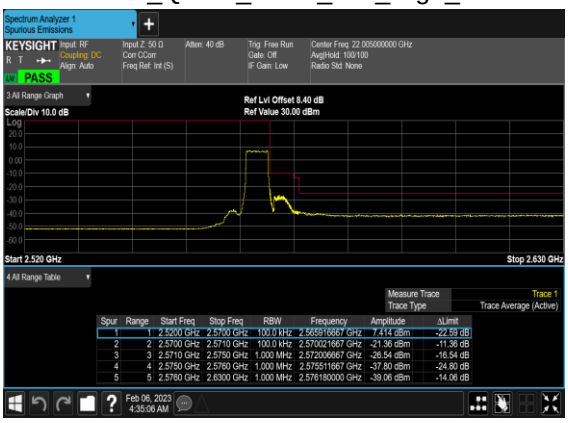

N7(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

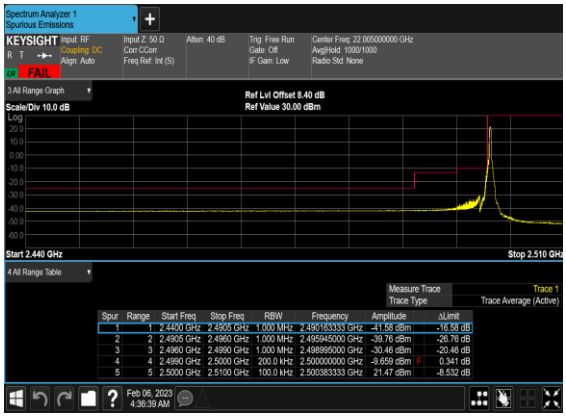

N7(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH_**CHP_PAS**

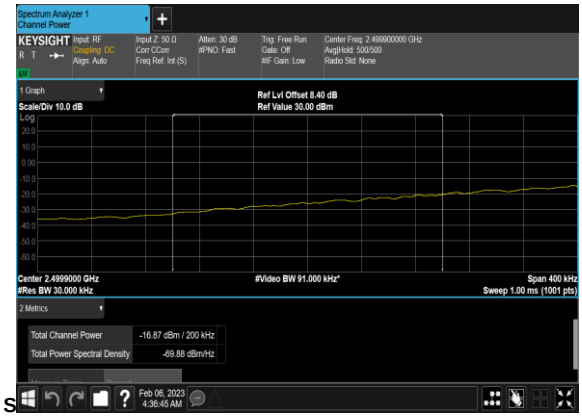

N7(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

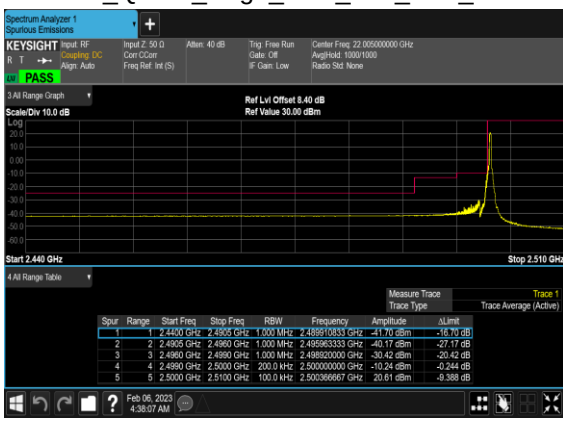

N7(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH_**CHP_PAS**

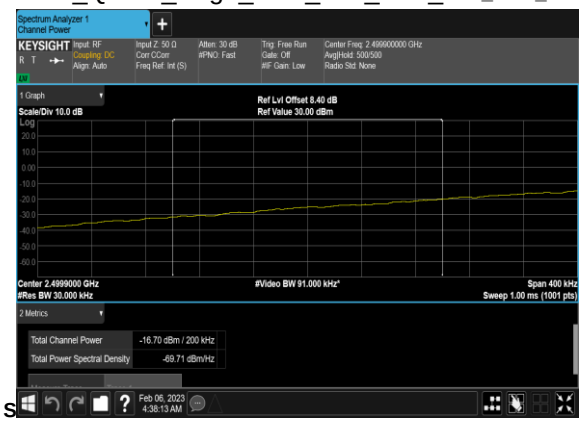

N7(10M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

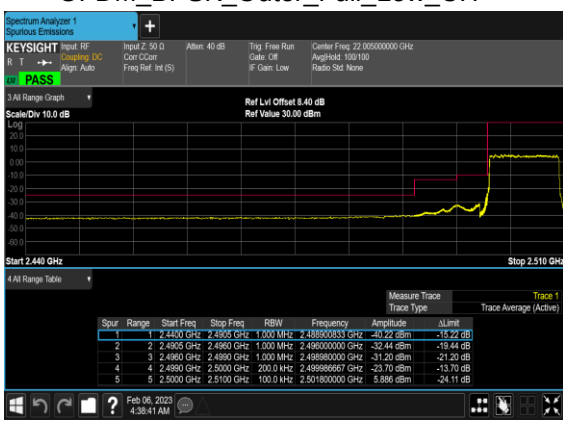

N7(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

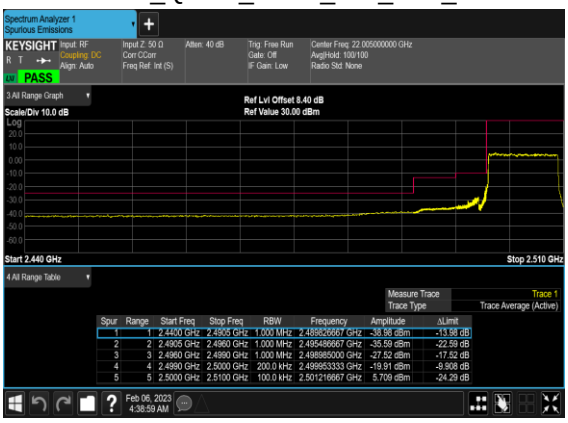

N7(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

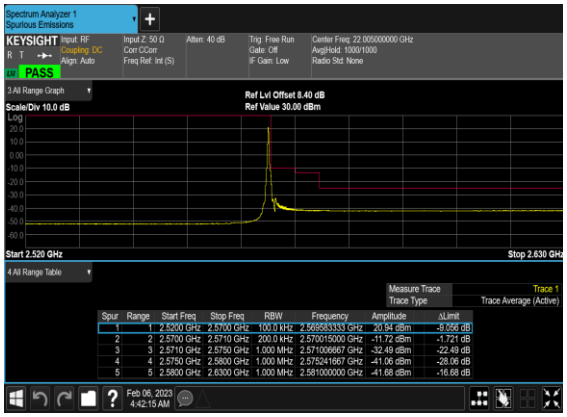

N7(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH_**CHP_PASS**

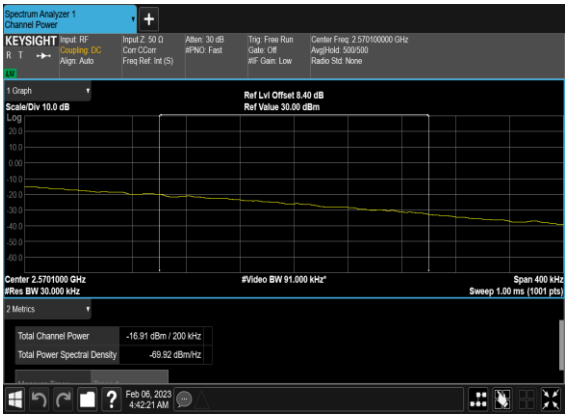

N7(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

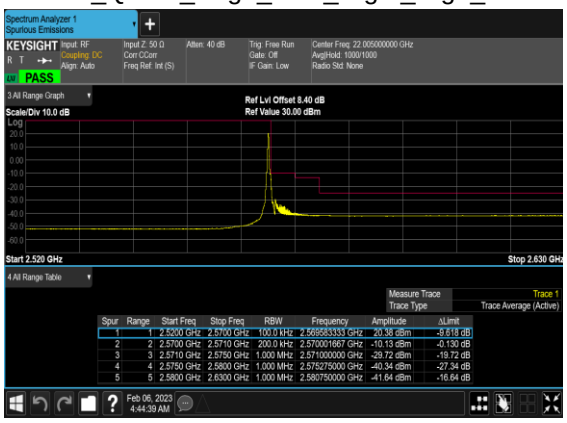
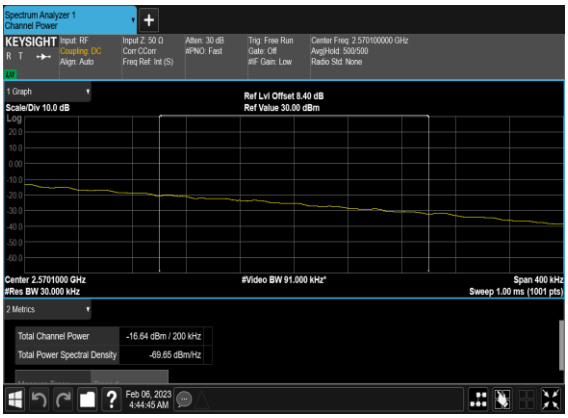
N7(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH_**CHP_PASS**