


AppendixA: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	Limit[MHz]	Verdict
TX	Ant1	2408	1.029	---	---
TX	Ant1	2440	1.031	---	---
TX	Ant1	2475	1.030	---	---

Test Graphs

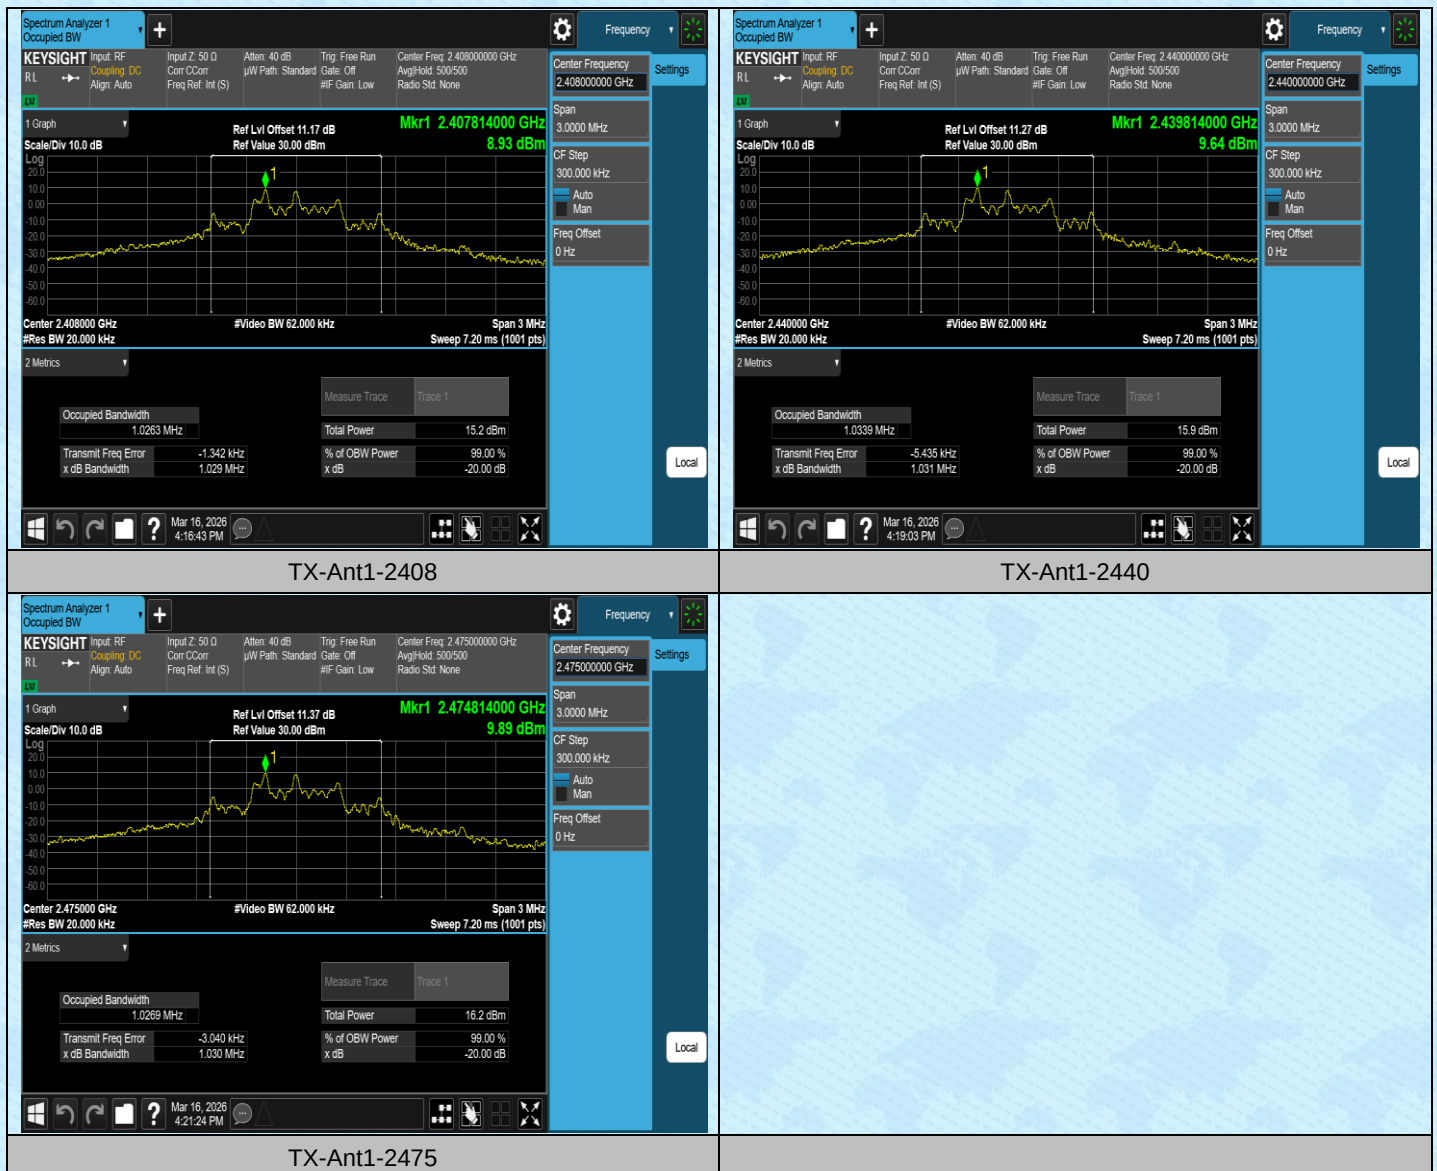


AppendixB: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2408	1.0231	2407.4858	2408.5089	---	---
TX	Ant1	2440	1.0393	2439.4732	2440.5125	---	---
TX	Ant1	2475	1.0252	2474.4858	2475.5110	---	---

Test Graphs

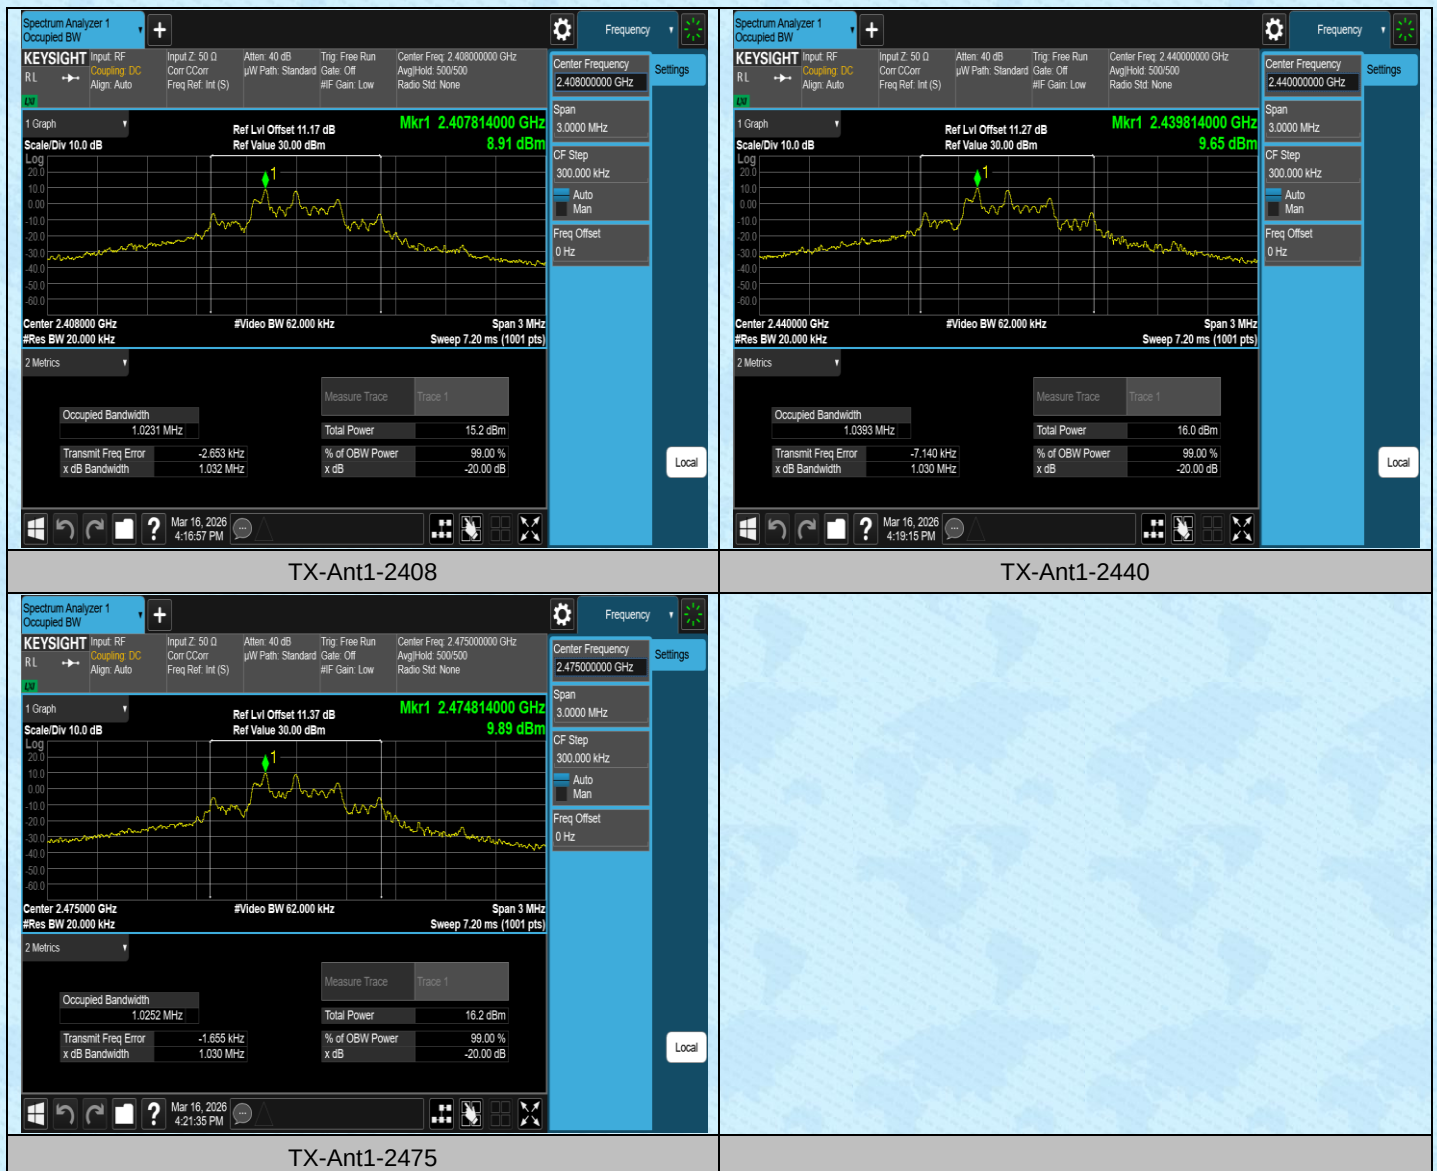


AppendixC: Maximum conducted output power

Test Result

TestMode	Antenna	Frequency[MHz]	Peak Power [dBm]	AV Power [dBm]	Limit[dBm]	Verdict
TX	Ant1	2408	9.04	8.64	≤20.97	PASS
TX	Ant1	2440	9.81	8.80	≤20.97	PASS
TX	Ant1	2475	10.01	9.08	≤20.97	PASS

Test Graphs

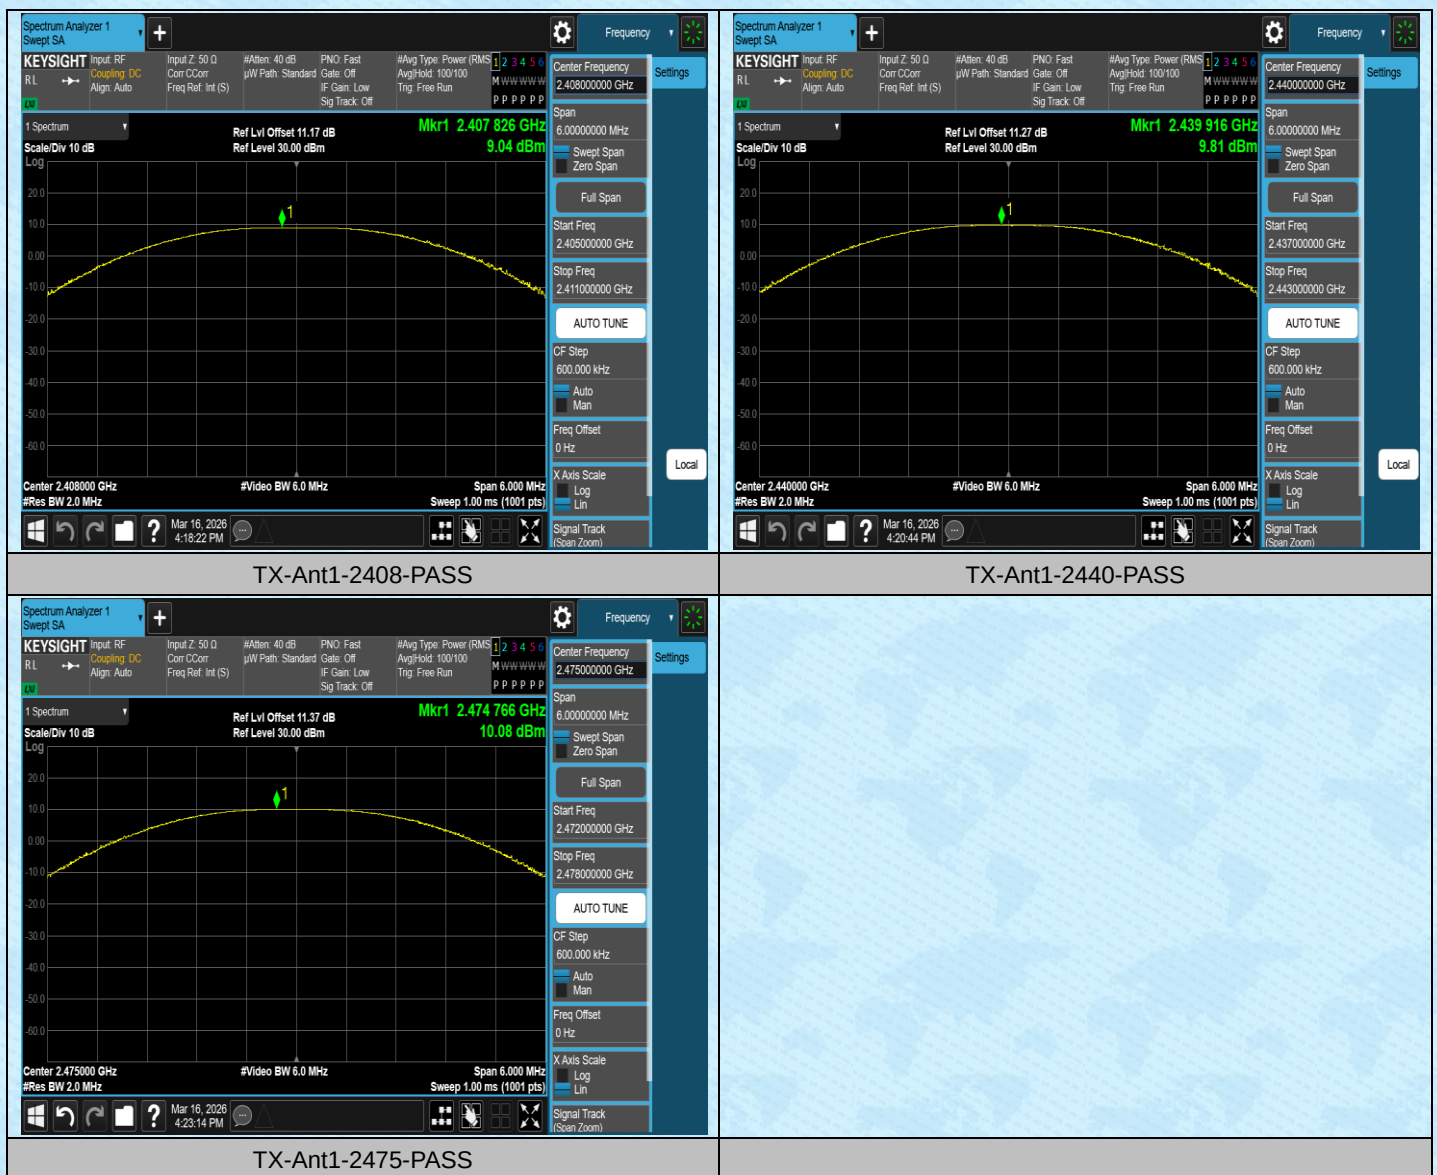


AppendixD: Carrier frequency separation

Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
TX	Ant1	Hop_2408	4.995	≥ 1.029	PASS
TX	Ant1	Hop_2440	4.000	≥ 1.031	PASS
TX	Ant1	Hop_2475	5.013	≥ 1.030	PASS

Test Graphs

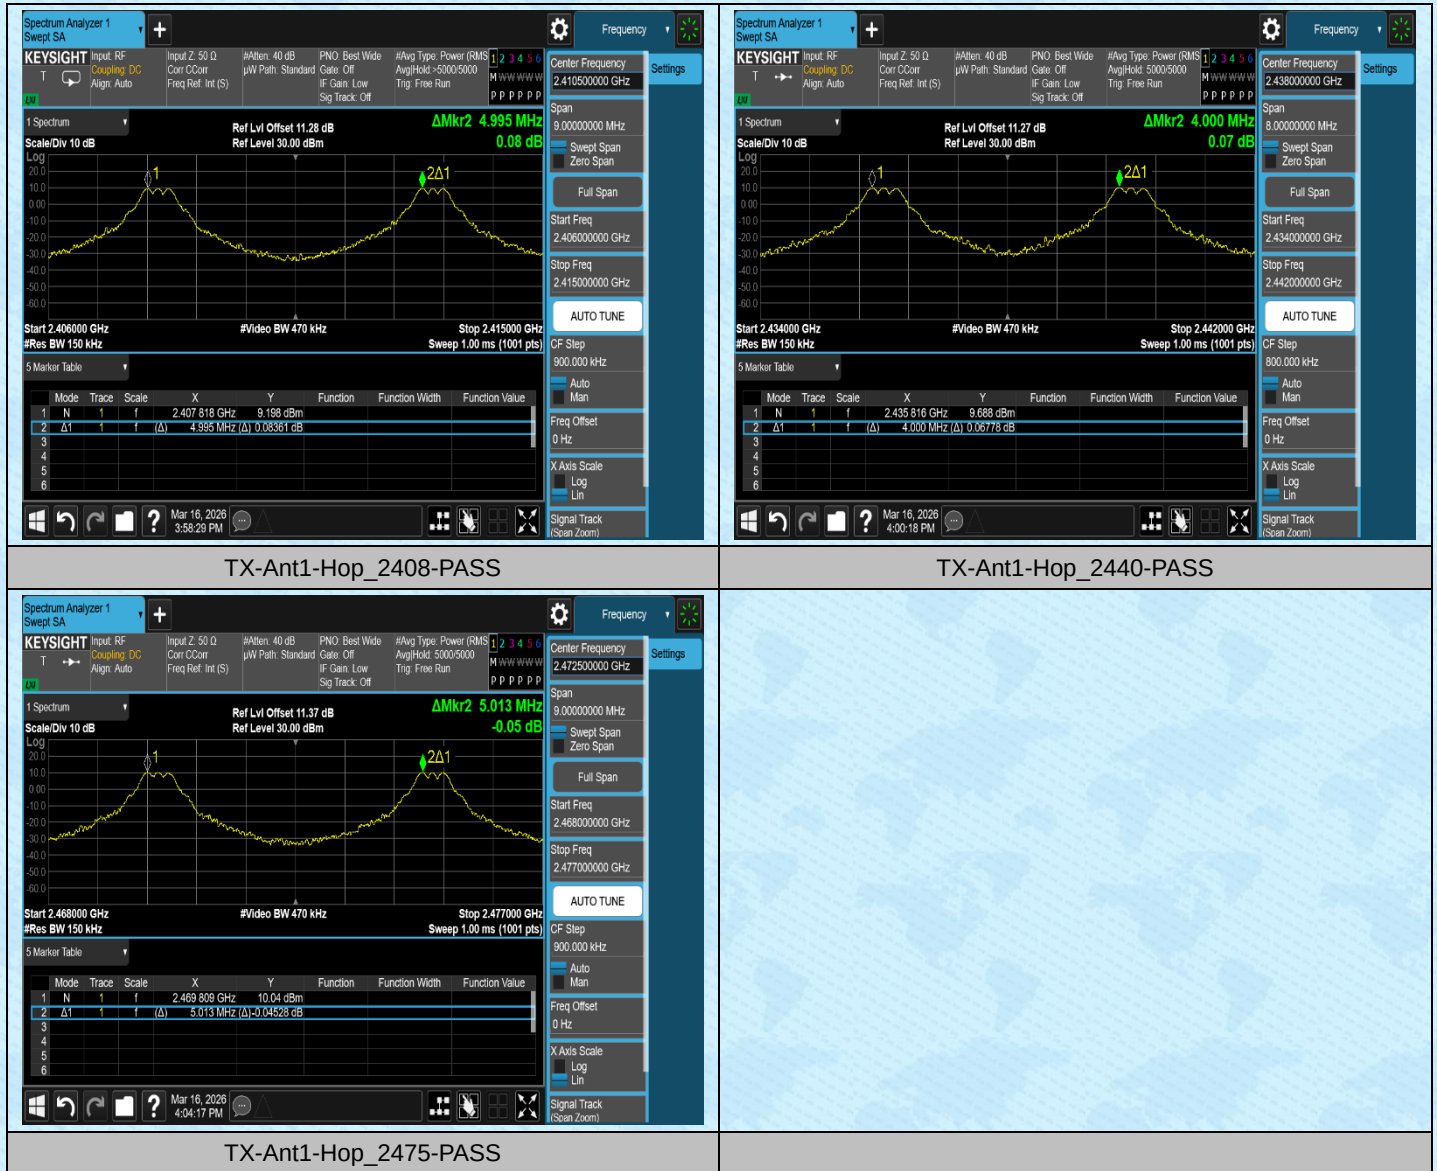



AppendixE: Time of occupancy

Test Result


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
TX	Ant1	Hop_2408	1.334	104	0.139	≤0.4	PASS
TX	Ant1	Hop_2440	1.333	104	0.139	≤0.4	PASS
TX	Ant1	Hop_2475	1.335	104	0.139	≤0.4	PASS

Test Graphs

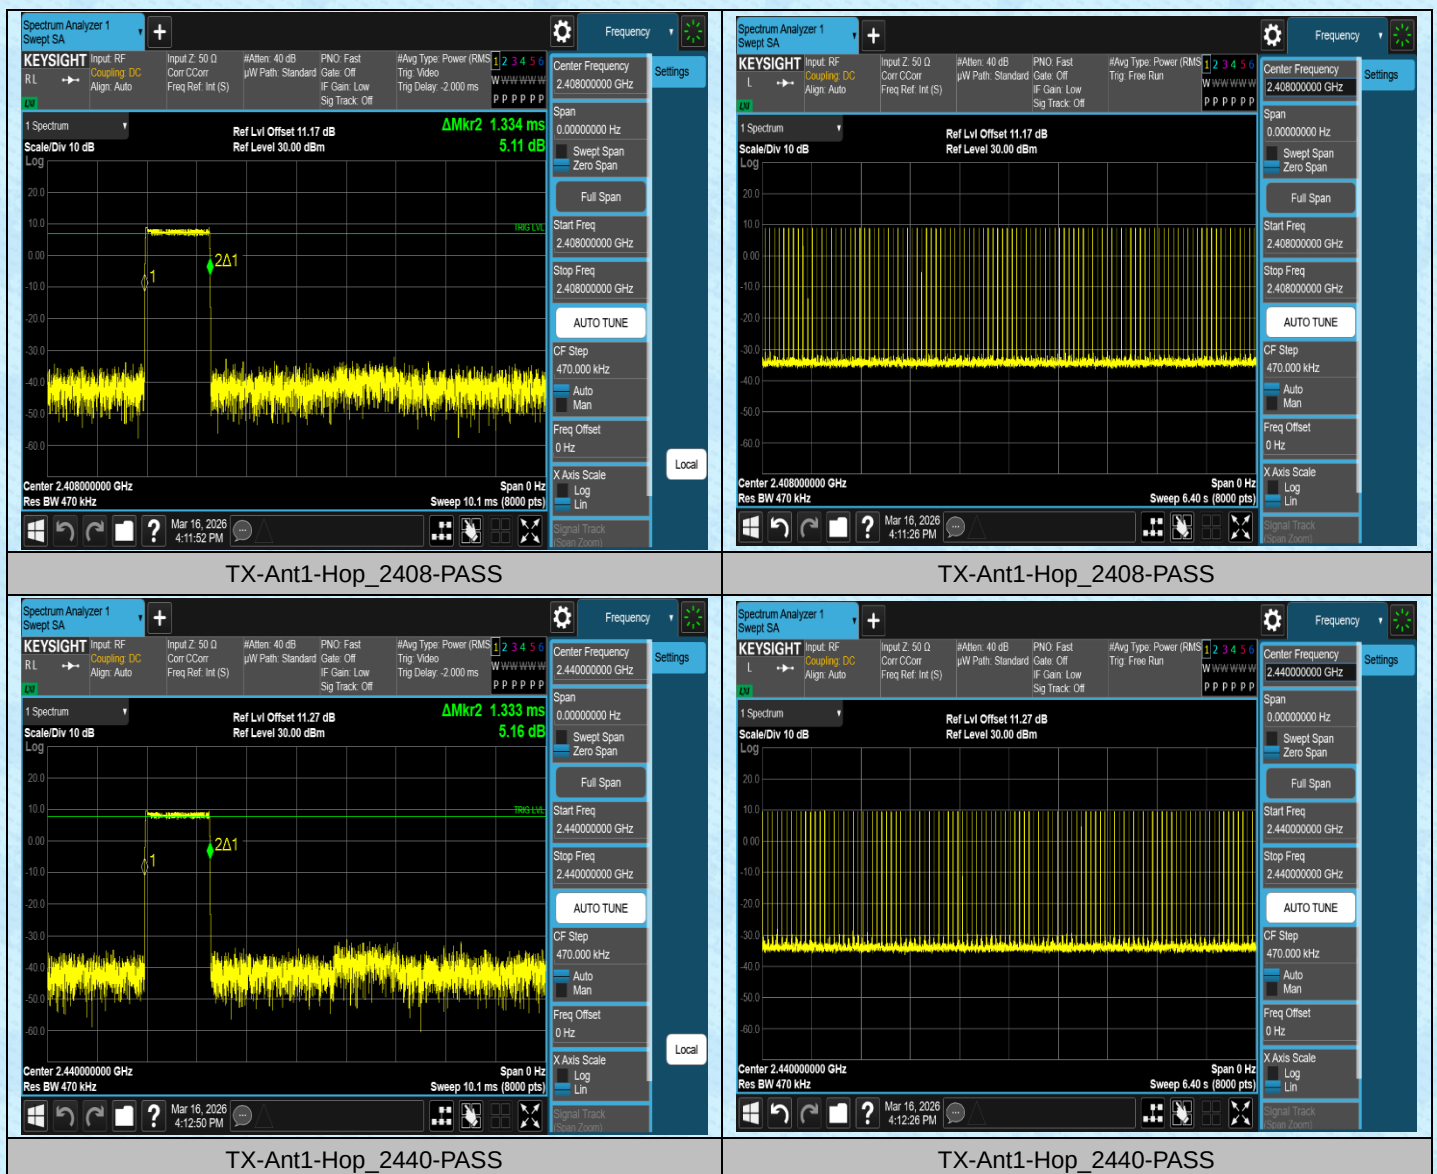

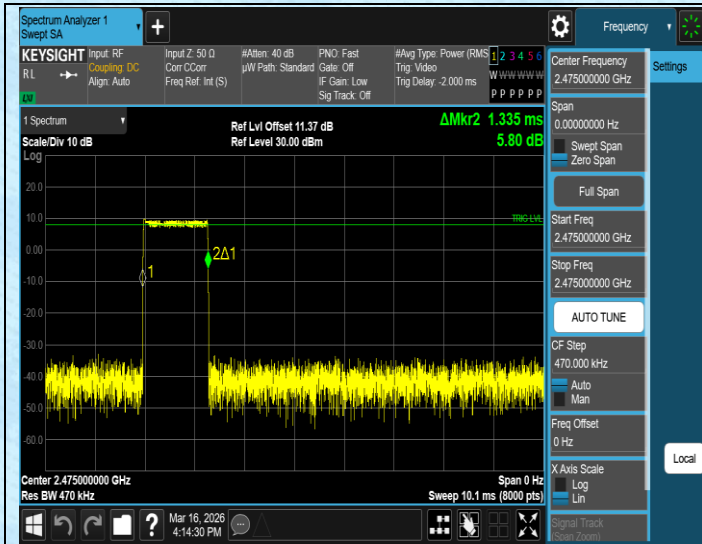

TX-Ant1-Hop_2475-PASS

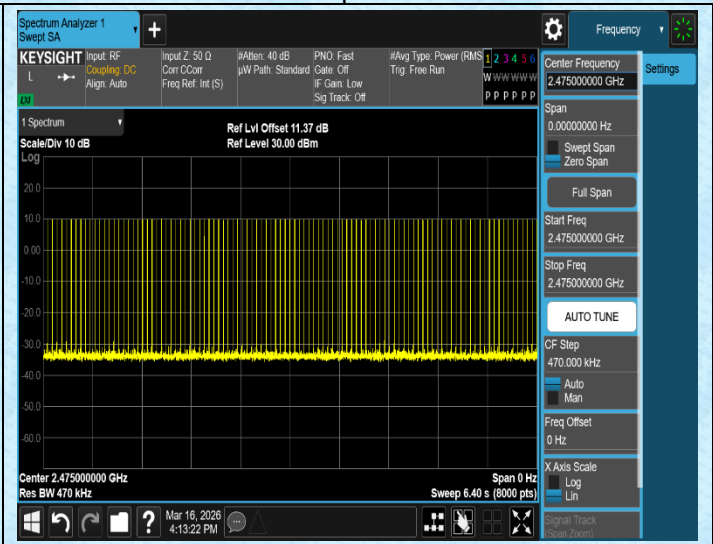


TX-Ant1-Hop_2475-PASS

AppendixF: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
TX	Ant1	Hop_2408	16	≥15	PASS

Test Graphs

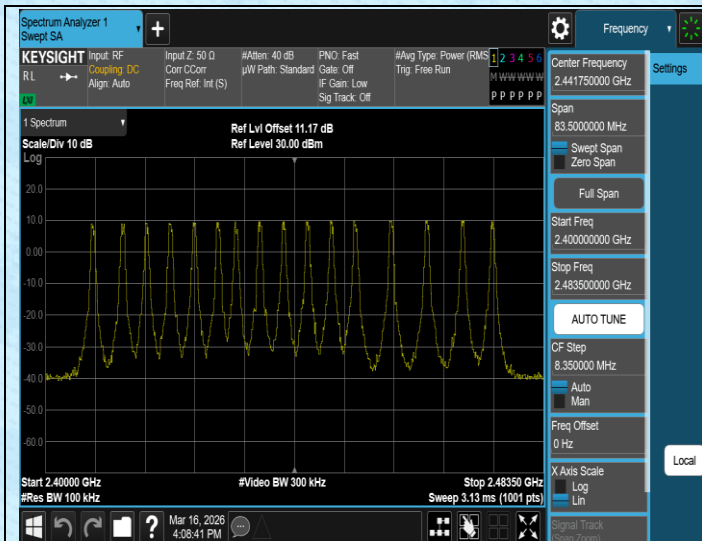


TX-Ant1-Hop_2408-PASS

AppendixG:Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	Low	2408	8.79	-45.04	≤-11.21	PASS
TX	Ant1	High	2475	9.81	-41.7	≤-10.19	PASS
TX	Ant1	Low	Hop_2408	6.26	-47.25	≤-13.74	PASS
TX	Ant1	High	Hop_2475	9.72	-43.49	≤-10.28	PASS

Test Graphs

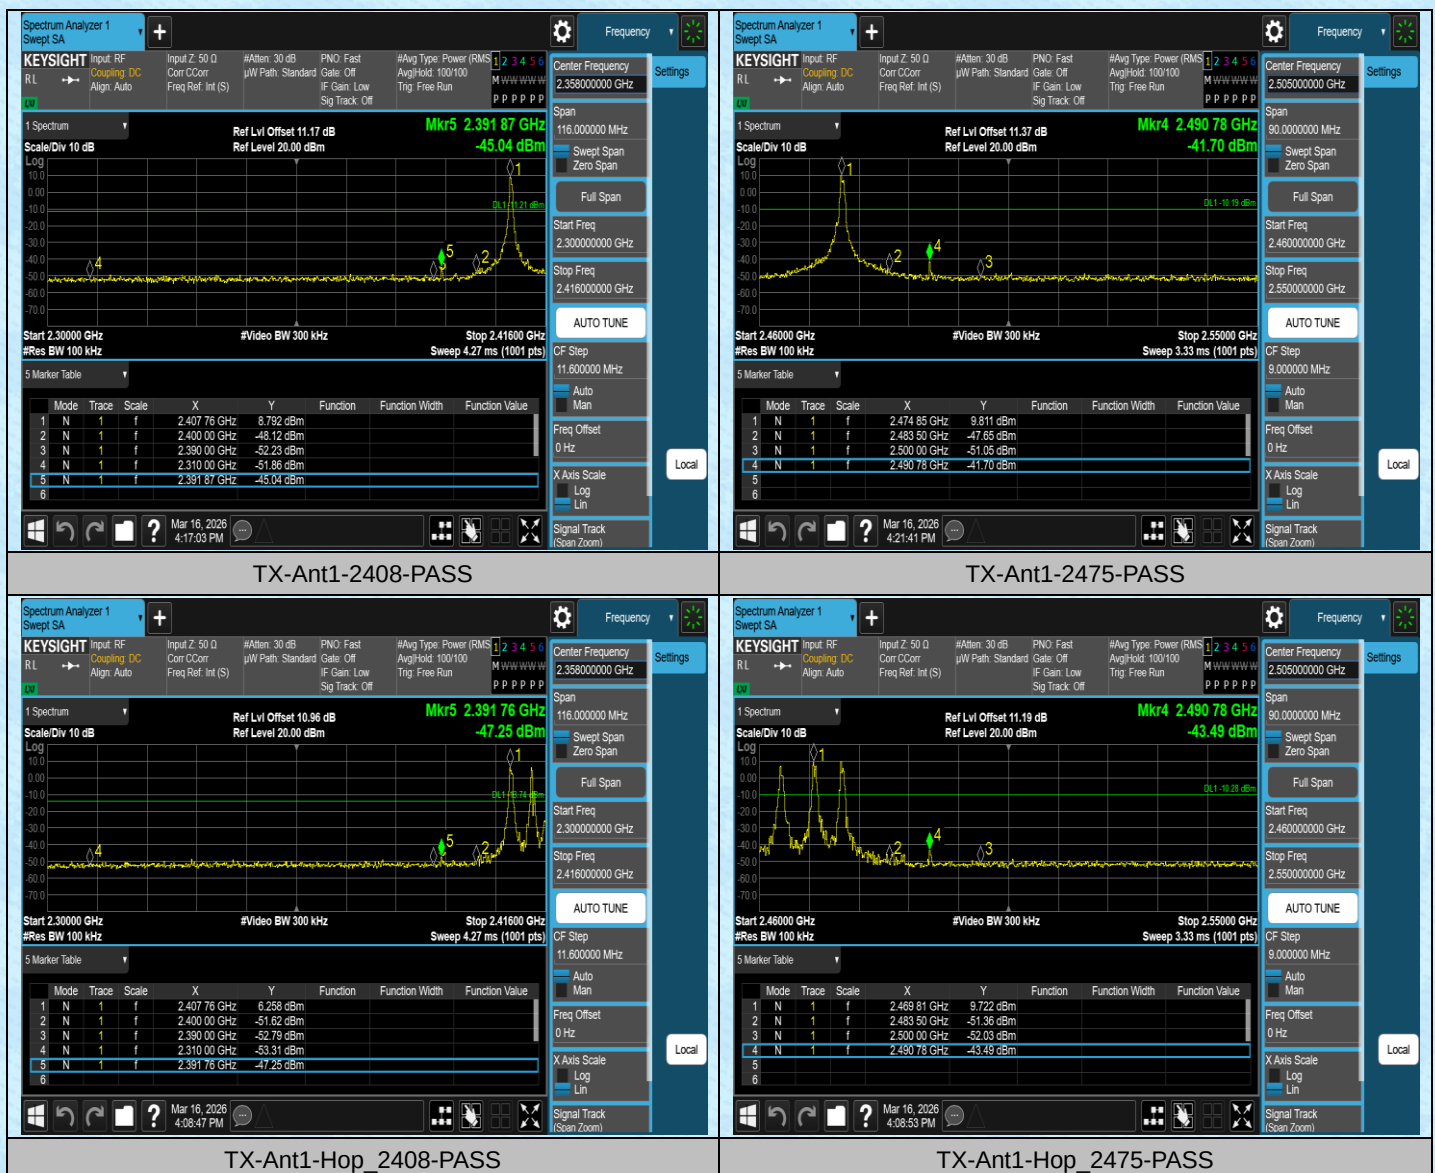



AppendixH:Conducted Spurious Emission

Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	2408	0~Reference	8.86	8.86	---	PASS
TX	Ant1	2408	30~1000	8.86	-62.55	≤-11.14	PASS
TX	Ant1	2408	1000~26500	8.86	-42.71	≤-11.14	PASS
TX	Ant1	2440	0~Reference	9.69	9.69	---	PASS
TX	Ant1	2440	30~1000	9.69	-61.12	≤-10.31	PASS
TX	Ant1	2440	1000~26500	9.69	-42.28	≤-10.31	PASS
TX	Ant1	2475	0~Reference	9.87	9.87	---	PASS
TX	Ant1	2475	30~1000	9.87	-61.94	≤-10.13	PASS
TX	Ant1	2475	1000~26500	9.87	-43.09	≤-10.13	PASS

Test Graphs

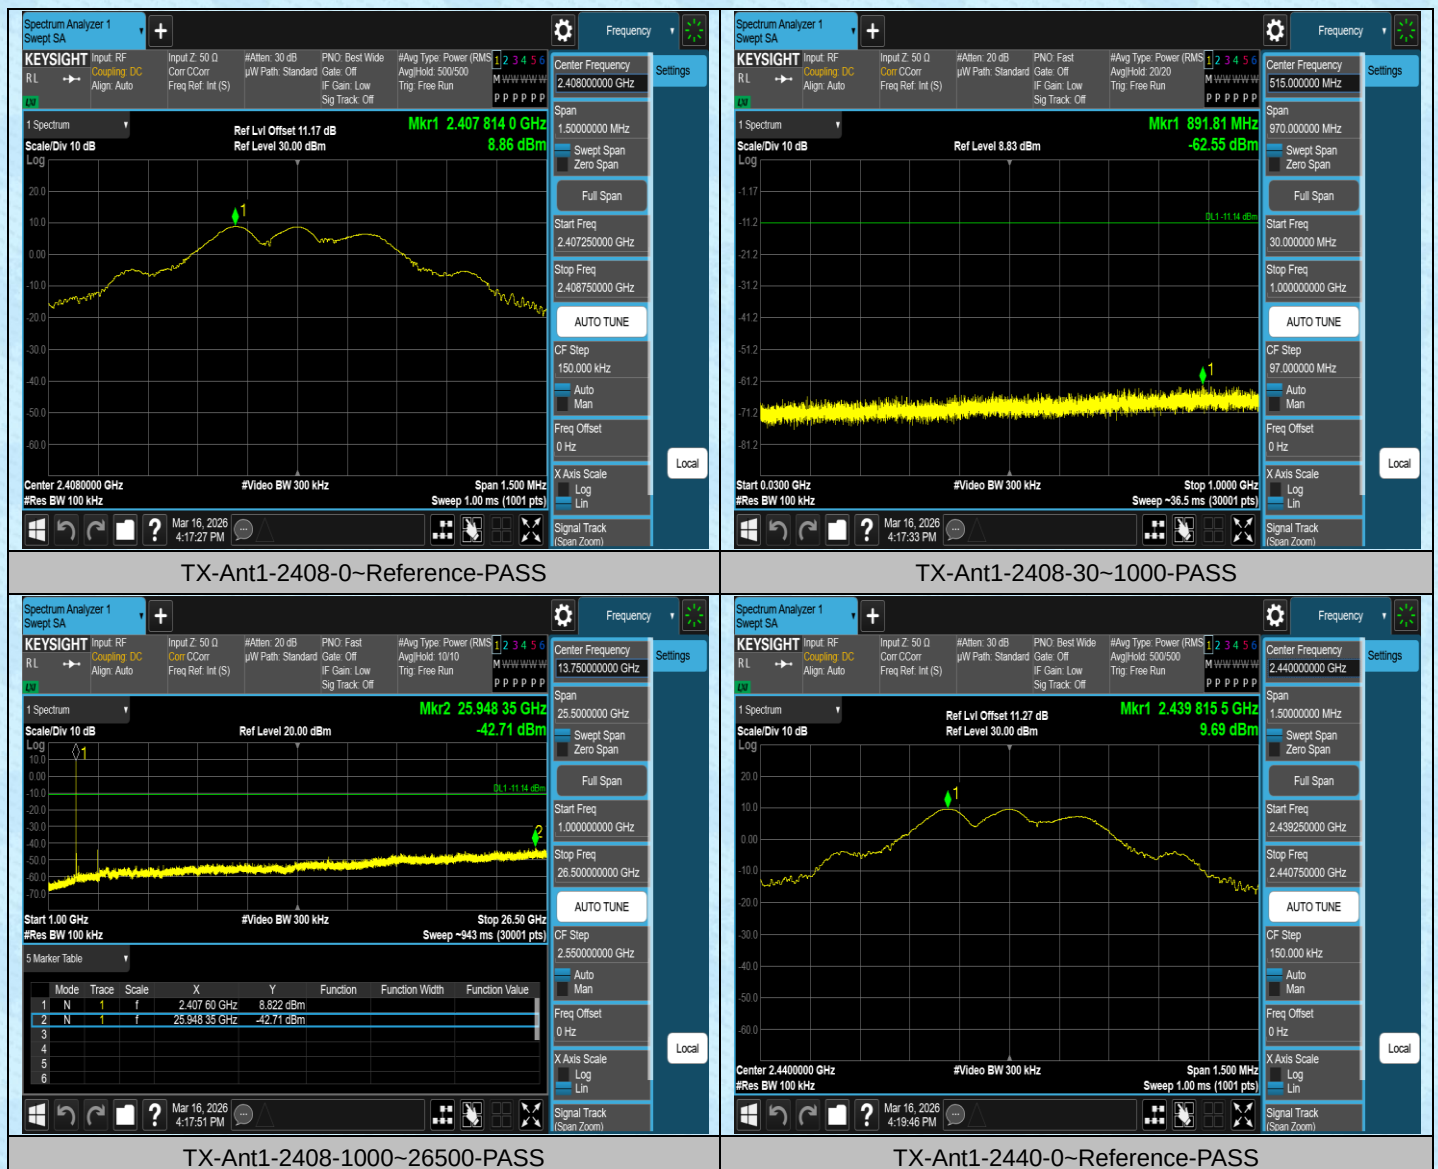


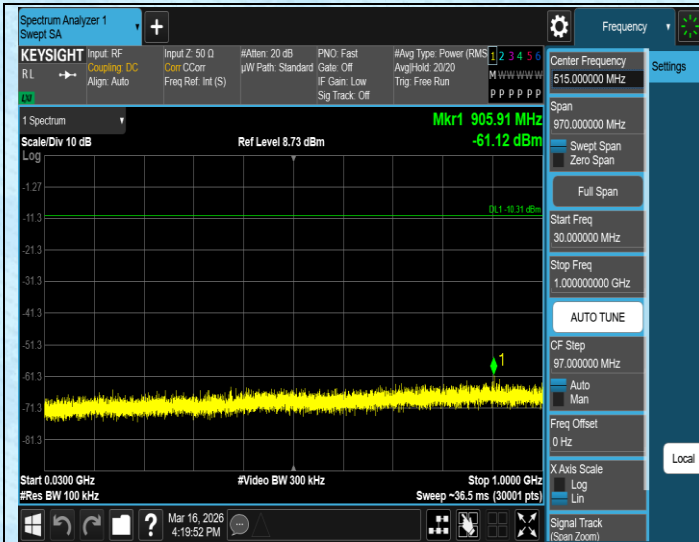

TX-Ant1-2440-30~1000-PASS




TX-Ant1-2440-1000~26500-PASS

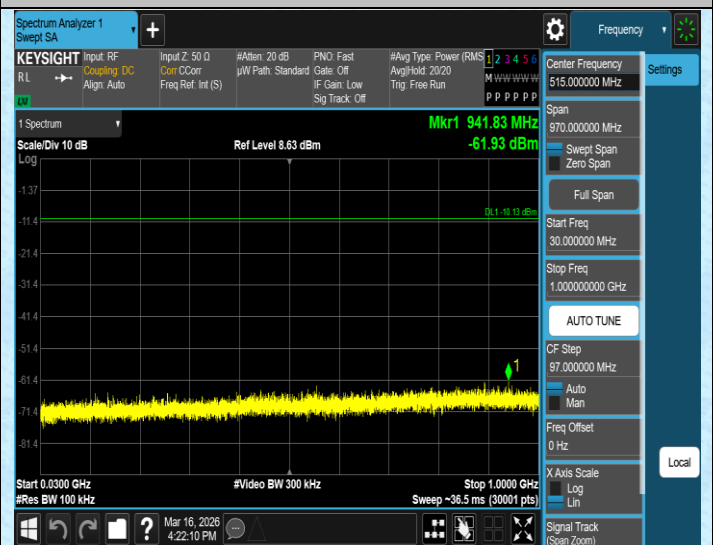

TX-Ant1-2475-0~Reference-PASS



TX-Ant1-2475-30~1000-PASS

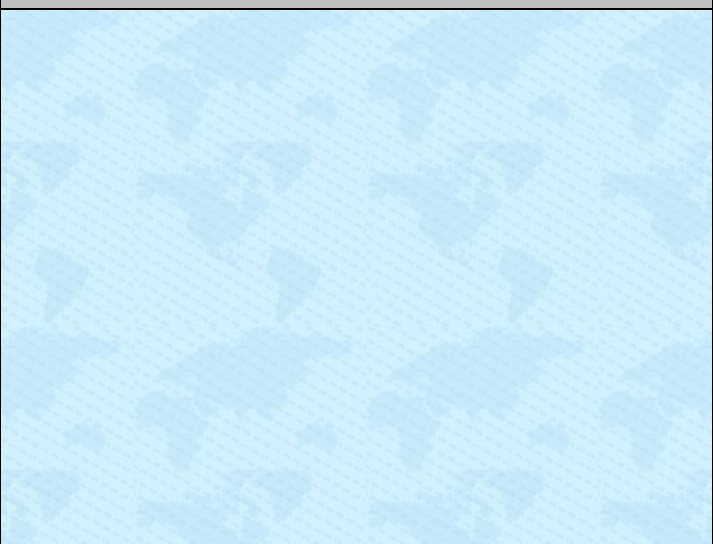


TX-Ant1-2475-1000~26500-PASS

AppendixI: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
TX	Ant1	2408	1.32	3.85	34.29	---	---
TX	Ant1	2440	1.35	3.85	35.06	---	---
TX	Ant1	2475	1.35	3.85	35.06	---	---

Test Graphs

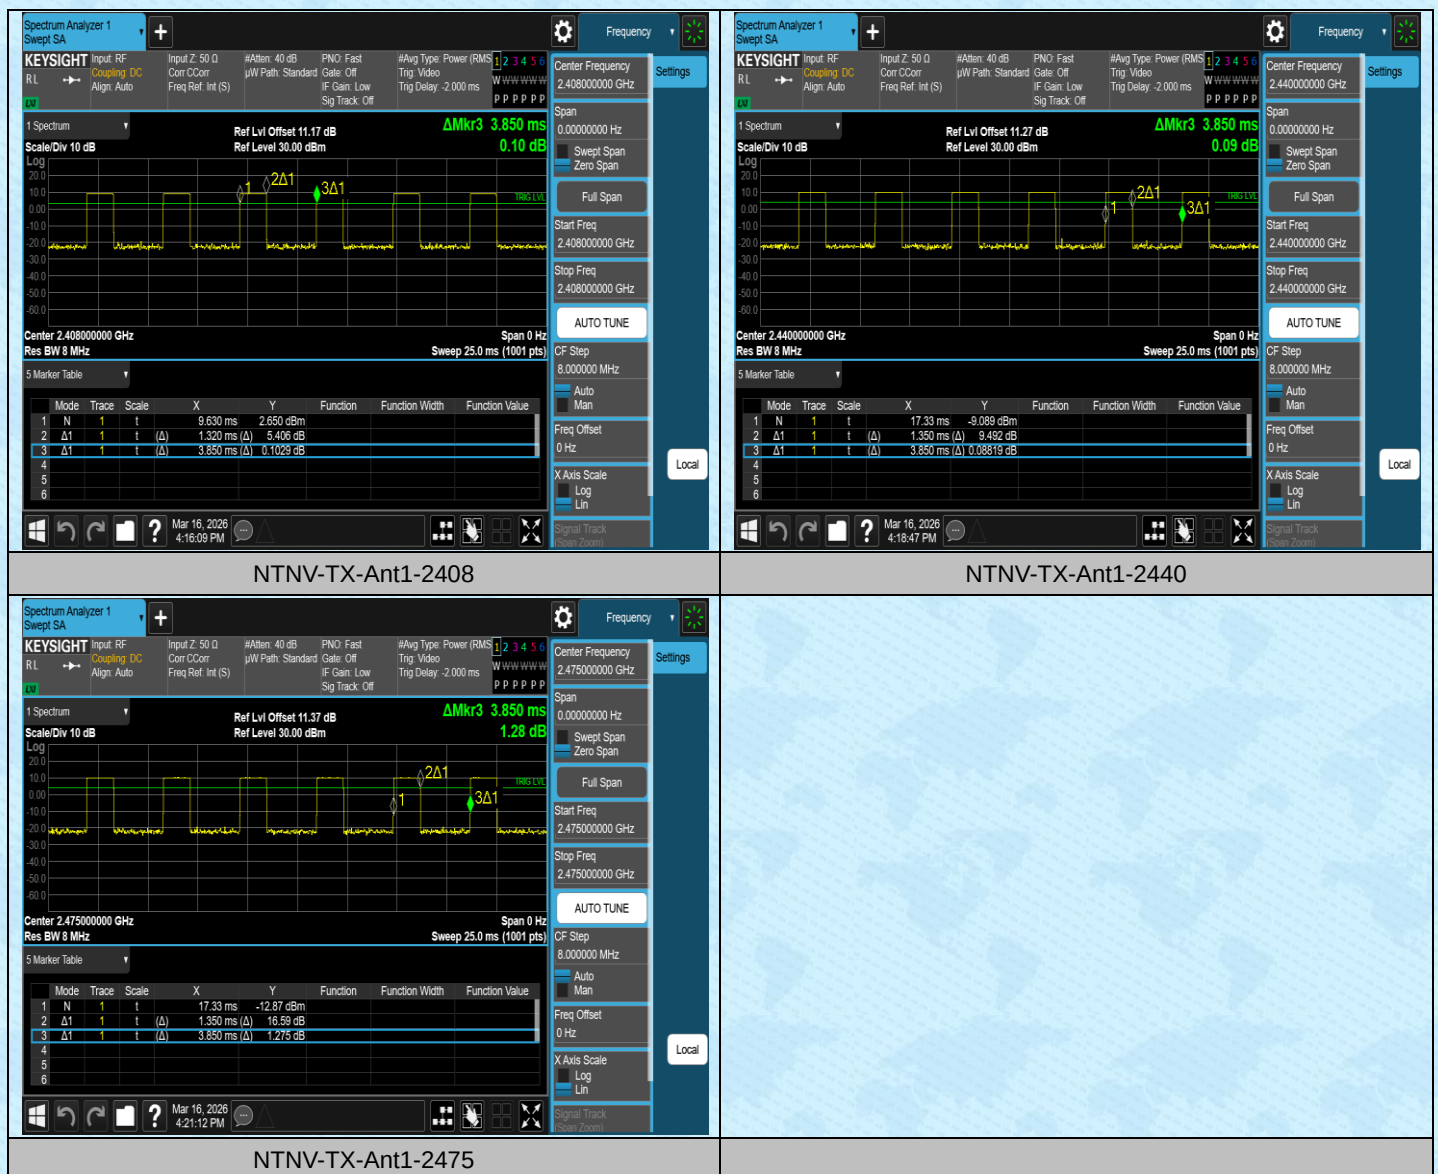

---End---