FCC RADIO TEST REPORT

FCC ID: 2A6KO-PCCY5

Sample : Music player

Trade Mark : CloudBox

Main Model : PCCY5

Additional Model : G9Y5

Report No. : UNIA25032507ER-63

Prepared for

Cloud Cover Media, Inc. a subsidiary of Sirius XM Radio LLC

953 N Sycamore Ave, Floor 8, Los Angeles, California, 90038, United States

Prepared by

Shenzhen United Testing Technology Co., Ltd.

D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community,
Dalang Sub-District, Longhua District, Shenzhen, Guangdong, China

TEST RESULT CERTIFICATION

Applicant ..... : Cloud Cover Media, Inc. a subsidiary of Sirius XM Radio LLC

Address ..... : 953 N Sycamore Ave, Floor 8, Los Angeles, California, 90038, United States

Manufacturer ..... : Huaren Technology Company Limited

Address ..... : 1203-1206,Yingfengnian Building,No.49, Xiangyin Road,Nanlian Community, Longgang District, Shenzhen,518116,China

Product description

Product ..... : Music player

Trade Mark ..... : CloudBox

Model Name ..... : PCCY5, G9Y5

Test Methods ..... : FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests .....: Mar. 26, 2025 ~ May. 17, 2025

Date of Issue .....: May. 17, 2025

Test Result .....: Pass

Edited by: Abe Yang

Reviewed by: Kelly Cheng

Approved by: Liuze

Table of Contents Page

1 TEST SUMMARY 5
1.1 TEST PROCEDURES AND RESULTS 5
1.2 TEST FACILITY 6
1.3 MEASUREMENT UNCERTAINTY 7
1.4 ENVIRONMENTAL CONDITIONS 7
2 GENERAL INFORMATION 8
2.1 GENERAL DESCRIPTION OF EUT 8
2.2 CARRIER FREQUENCY OF CHANNELS 9
2.3 TEST MODE 9
2.4 DESCRIPTION OF THE TEST MODES 9
2.5 TEST SETUP 10
2.6 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL 10
2.7 MEASUREMENT INSTRUMENTS LIST 11
3 CONDUCTED EMISSION 12
3.1 TEST LIMIT 12
3.2 TEST SETUP 12
3.3 TEST PROCEDURE 13
3.4 TEST RESULT 13
3.5 TEST LIMIT 16
3.6 TEST SETUP 17
3.7 TEST PROCEDURE 18
3.8 TEST RESULT 18
4 6dB OCCUPIED BANDWIDTH 51
4.1 TEST LIMIT 51
4.2 TEST PROCEDURE 51
4.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 51
4.4 MEASUREMENT EQUIPMENT USED 51
4.5 TEST RESULT 51
5 POWER SPECTRAL DENSITY 52
5.1 TEST LIMIT 52
5.2 TEST PROCEDURE 52
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 52
5.4 EQUIPMENT USED 52
5.5 TEST RESULT 52
6 AVERAGE OUTPUT POWER 53

Table of Contents Page

6.1 TEST LIMIT 53
6.2 TEST PROCEDURE 53
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 53
6.4 EQUIPMENT USED 53
6.5 TEST RESULT 53
7 OUT OF BAND EMISSIONS 54
7.1 TEST LIMIT 54
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 54
7.3 TEST PROCEDURE 54
7.4 MEASUREMENT EQUIPMENT USED 54
7.5 TEST RESULT 54
8 ANTENNA REQUIREMENT 55
9 PHOTO OF TEST 56
10 EUT Constructional Details 58

1 TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

Item	FCC Rules	Description Of Test	Result
1	FCC Part 15.207	Conducted Emission	Pass
2	FCC Part 15.209(a)	Radiated Emission	Pass
3	FCC Part 15.247(a)(2)	6dB Occupied Bandwidth	Pass
4	FCC Part 15.247(e)	Power Spectral Density	Pass
5	FCC Part 15.247(b)	Average Output Power	Pass
6	FCC Part 15.247(d)	Out Of Band Emissions	Pass
7	FCC Part 15.247(d)	Conducted Spurious Emission	Pass
8	FCC Part 15.203	Antenna Requirement	Pass

Note:

“N/A” denotes test is not applicable in this Test Report.

Note:The EUT has two antennas, and both antennas can transmit simultaneously

1.2 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.

Address : D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community, Dalang Sub-District, Longhua District, Shenzhen, Guangdong, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01
The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885
The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 31584

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ± U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
UNI	ANSI	9kHz ~ 150kHz	2.96
		150kHz ~ 30MHz	2.44

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
UNI	ANSI	9kHz ~ 30MHz	2.50
		30MHz ~ 1000MHz	4.80
		1000MHz ~ 18000MHz	4.13

C. RF Conducted Method:

Item	Measurement Uncertainty
Uncertainty of total RF power, conducted	U_c = ±0.8 dB
Uncertainty of RF power density, conducted	U_c = ±2.6 dB
Uncertainty of spurious emissions, conducted	U_c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U_c = ±2 %

1.4 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range (℃)	15 - 35	-20 - 50
Relative humidty range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.		

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product:	Music player
Trade Mark:	CloudBox
Main Model:	PCCY5
Additional Model:	G9Y5
Model Difference:	All model’s the function, software and electric circuit are the same, only with a model named different. Test sample model: PCCY5
FCC ID:	2A6KO-PCCY5
Operation Frequency:	802.11b/g/n20/ax20: 2412~2462MHz, n40/ax40:2422~2452MHz
Number of Channels:	802.11b/g/n20/ax20: 11CH,n40/ax40:7CH
Average Conducted Output Power:	20.079 dBm
Modulation Type:	CCK, OFDM, DBPSK, DAPSK
Antenna Type:	FPC Antenna
Antenna Gain:	ANT0:1.82dBi,ANT1:1.82dBi
Battery:	N/A
Adapter:	MODEL:MR-0502000US INPUT:100-240V-50/60Hz 0.3A OUTPUT:5.0V=2.0A 10.0W
Power Source:	DC 5V from adapter

2.2 CARRIER FREQUENCY OF CHANNELS

Channel List for 802.11b/g/n/(HT20)/ax20							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n/(HT40)/ax40							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	/	04	2427	07	2442	10	/
02	/	05	2432	08	2447	11	/
03	2422	06	2437	09	2452		

2.3 TEST MODE

The EUT was programmed to be in continuously transmitting mode.

Channel List for 802.11b/g/n(HT20)/ax20		
Test Channel	EUT Channel	Test Frequency (MHz)
Low	CH01	2412
Middle	CH06	2437
High	CH11	2462

Channel List for 802.11n/(HT40)/ax40		
Test Channel	EUT Channel	Test Frequency (MHz)
Low	CH03	2422
Middle	CH06	2437
High	CH09	2452

2.4 DESCRIPTION OF THE TEST MODES

During the measurement the environmental conditions were within the listed ranges:

Voltage	Normal Voltage	AC 120V
	High Voltage	AC 132V
	Low Voltage	DC 108V
Other	Normal Temperature	24°C
	Relative Humidity	55 %
	Air Pressure	989 hPa

Note: All modes were test at Normal Voltage, High Voltage, and Low Voltage, only the worst results of Normal Voltage was reported in the test report.

2.5 TEST SETUP

Operation of EUT during Conducted testing:



Operation of EUT during Radiation testing:

Operation of EUT during RF Conducted testing:

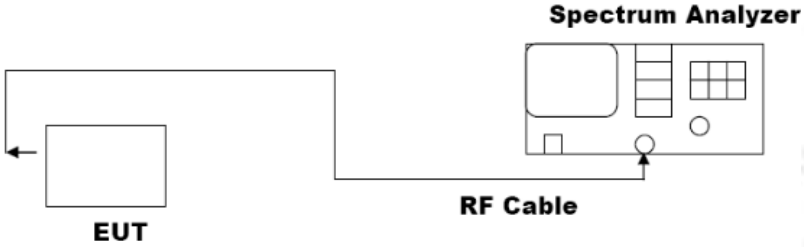

2.6 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Cable Length(m)	Note
1	Music player	PCCY5	--	EUT
2	Adapter	MR-0502000US	--	AE

Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

2.7 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
Radiated Emissions Measurement					
1	Radiated Emission Test Software	EZ-EMC	Ver.CCS-03A1	N/A	N/A
2	Horn Antenna	Sunol	DRH-118	A101415	2025.07.14
3	Broadband Hybrid Antenna	Sunol	JB1	A090215	2025.07.28
4	PREAMP	HP	8449B	3008A00160	2025.06.11
5	PREAMP	HP	8447D	2944A07999	2025.06.11
6	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2025.06.11
7	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2025.06.11
8	Signal Generator	Agilent	E4421B	MY4335105	2025.06.11
9	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2025.06.11
10	MXA Signal Analyzer	Keysight	N9020A	MY51110104	2025.06.11
11	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2025.06.11
12	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2025.06.11
13	RF power divider	Anritsu	K241B	992289	2025.06.11
14	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2025.06.11
15	Active Loop Antenna	Com-Power	AL-130R	10160009	2025.06.11
16	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2025.09.22
17	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2025.07.14
18	Horn Antenna	A-INFOMW	LB-180400-KF	J211060660	2025.07.14
19	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2025.09.22
20	Signal Generator	Agilent	N5183A	MY47420153	2025.09.22
21	Spctrum Analyzer	Rohde&Schwarz	FSP 40	100501	2025.09.22
22	Power Meter	KEYSIGHT	N1911A	MY50520168	2025.09.22
23	Frequency Meter	VICTOR	VC2000	997406086	2025.09.22
24	DC Power Source	HYELEC	HY5020E	055161818	2025.09.22

3 CONDUCTED EMISSION

3.1 TEST LIMIT

For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency.
For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 TEST SETUP

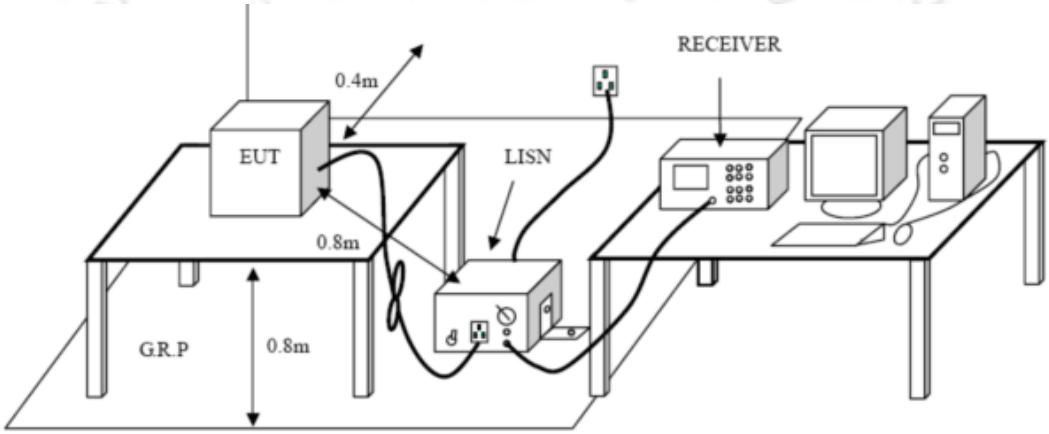

3.3 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is placed on a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10: 2013.
2. Support equipment, if needed, was placed as per ANSI C63.10: 2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10: 2013.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hzpower through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

3.4 TEST RESULT

PASS

Remark:
1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes were test at Low, Middle, and High channel, only the worst result of 8DPSK Middle Channel was reported.

Temperature:	24℃	Relative Humidity:	48%
Test Date:	Apr. 01, 2025	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Transmitting mode of 802.11g MIMO		

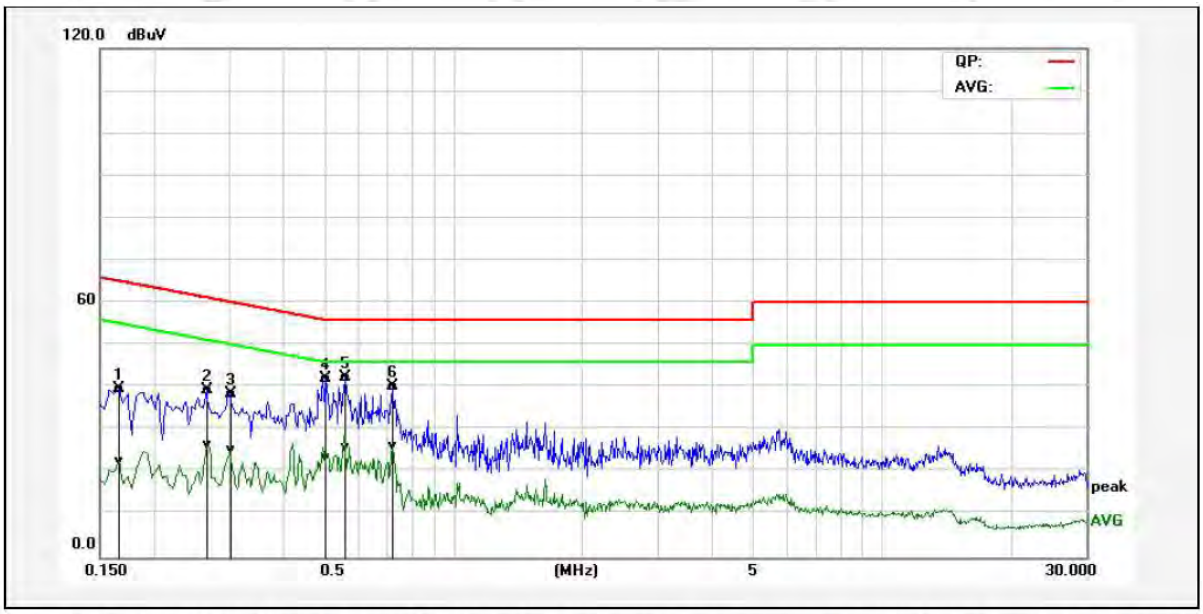

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.1660	29.63	12.61	10.10	39.73	22.71	65.15	55.16	-25.42	-32.45	Pass
2P	0.2660	29.23	16.40	10.08	39.31	26.48	61.24	51.24	-21.93	-24.76	Pass
3P	0.3020	28.45	15.22	10.06	38.51	25.28	60.19	50.19	-21.68	-24.91	Pass
4P	0.5060	32.16	13.51	10.08	42.24	23.59	56.00	46.00	-13.76	-22.41	Pass
5*	0.5620	32.51	15.92	10.06	42.57	25.98	56.00	46.00	-13.43	-20.02	Pass
6P	0.7220	30.38	16.17	10.07	40.45	26.24	56.00	46.00	-15.55	-19.76	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

Temperature:	24℃	Relative Humidity:	48%
Test Date:	Apr. 01, 2025	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Transmitting mode of 802.11g MIMO		

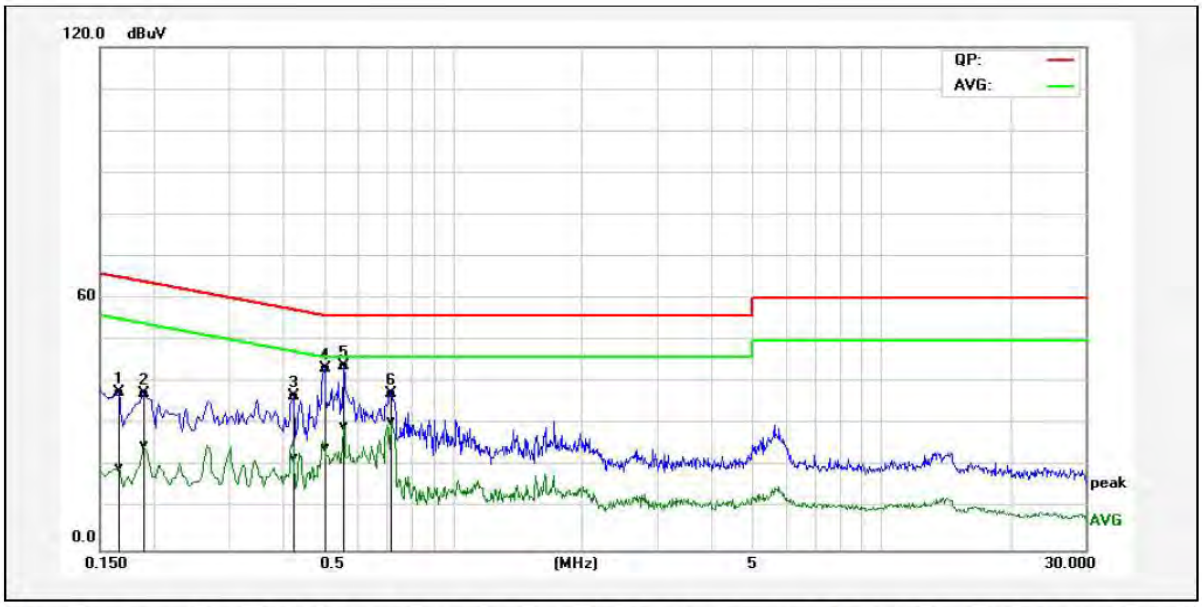

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.1660	27.60	9.70	10.10	37.70	19.80	65.15	55.16	-27.45	-35.36	Pass
2P	0.1900	27.23	15.00	10.10	37.33	25.10	64.03	54.04	-26.70	-28.94	Pass
3P	0.4260	26.54	11.98	10.07	36.61	22.05	57.33	47.33	-20.72	-25.28	Pass
4P	0.5020	33.35	14.48	10.08	43.43	24.56	56.00	46.00	-12.57	-21.44	Pass
5*	0.5580	33.76	19.36	10.07	43.83	29.43	56.00	46.00	-12.17	-16.57	Pass
6P	0.7180	27.21	20.61	10.07	37.28	30.68	56.00	46.00	-18.72	-15.32	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

3.4.1 RADIATED EMISSION

3.5 TEST LIMIT

For unintentional device, according to §15.209(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	Quasi-peak	300
0.490MHz-1.705MHz	24000/F (kHz)	-	Quasi-peak	30
1.705MHz-30MHz	30	-	Quasi-peak	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3
		74.0	Peak	3

Limit calculation and transfer to 3m distance as showed in the following table:

Frequency (MHz)	Limit (dBuV/m)	Distance (m)
0.009-0.490	20log(2400/F(KHz))+40log(300/3)	3
0.490-1.705	20log(24000/F(KHz))+40log(30/3)	3
1.705-30.0	69.5	3
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

3.6 TEST SETUP

1. Radiated Emission Test-Up Frequency Below 30MHz

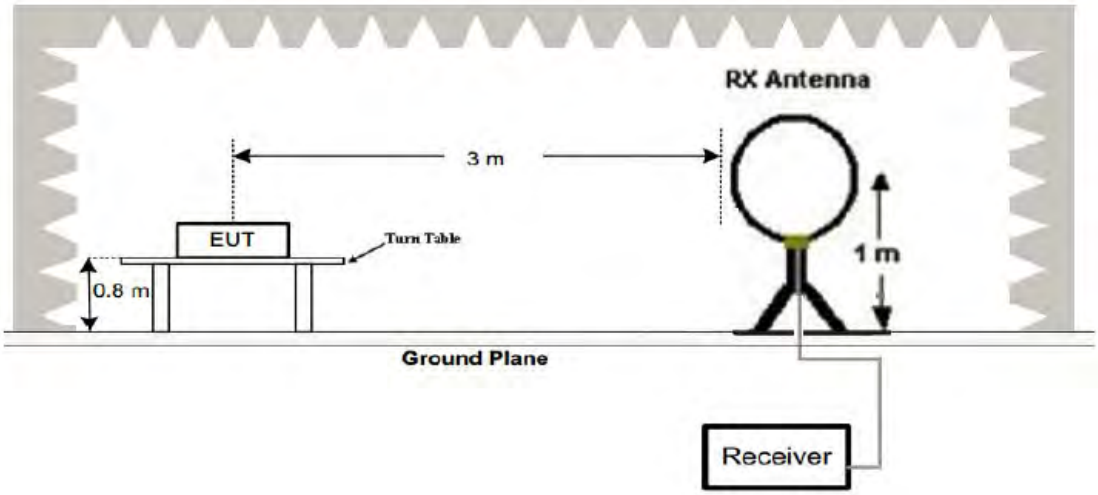

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

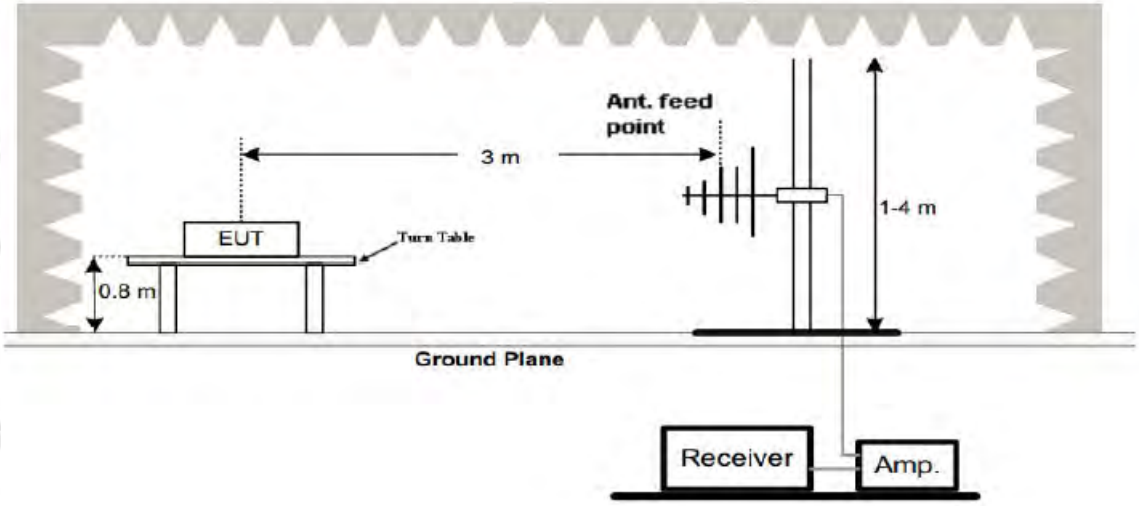

3. Radiated Emission Test-Up Frequency Above 1GHz

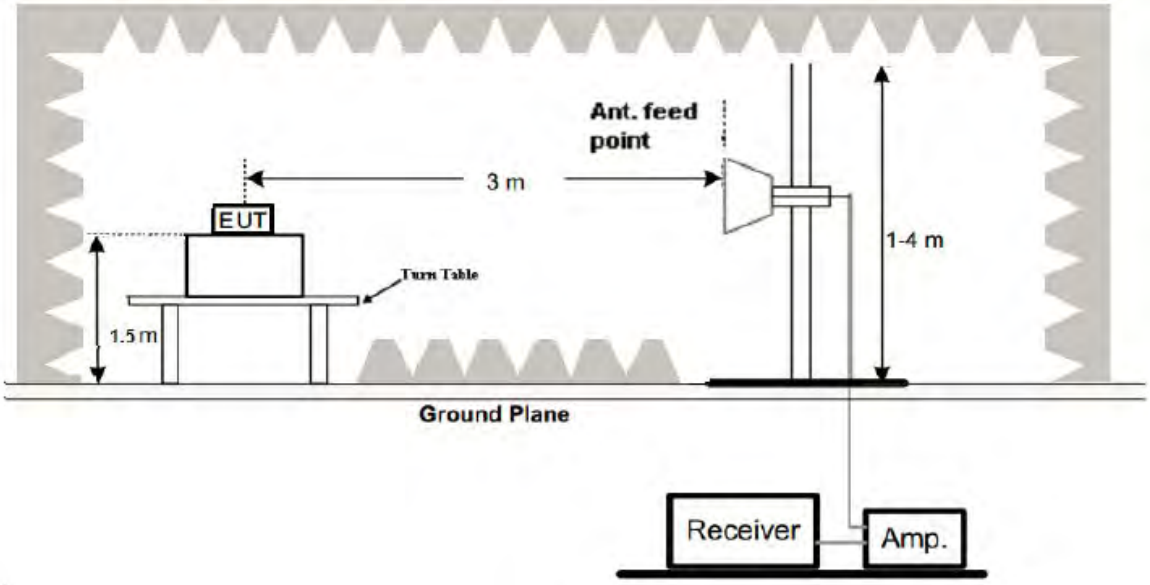

3.7 TEST PROCEDURE

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9kHz to25GHz per FCC PART 15.33(a).

Note: For battery operated equipment, the equipment tests shall be performed using a new battery.

3.8 TEST RESULT

PASS

Remark:

1. All modes were test at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported for below 1GHz test.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “X axis” position was the worst, and test data recorded in this report.

Below 1GHz Test Results:

Temperature:	25℃	Relative Humidity:	60%
Test Date:	Apr. 01, 2025	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Horizontal
Test Mode:	Transmitting mode of 802.11g MIMO		

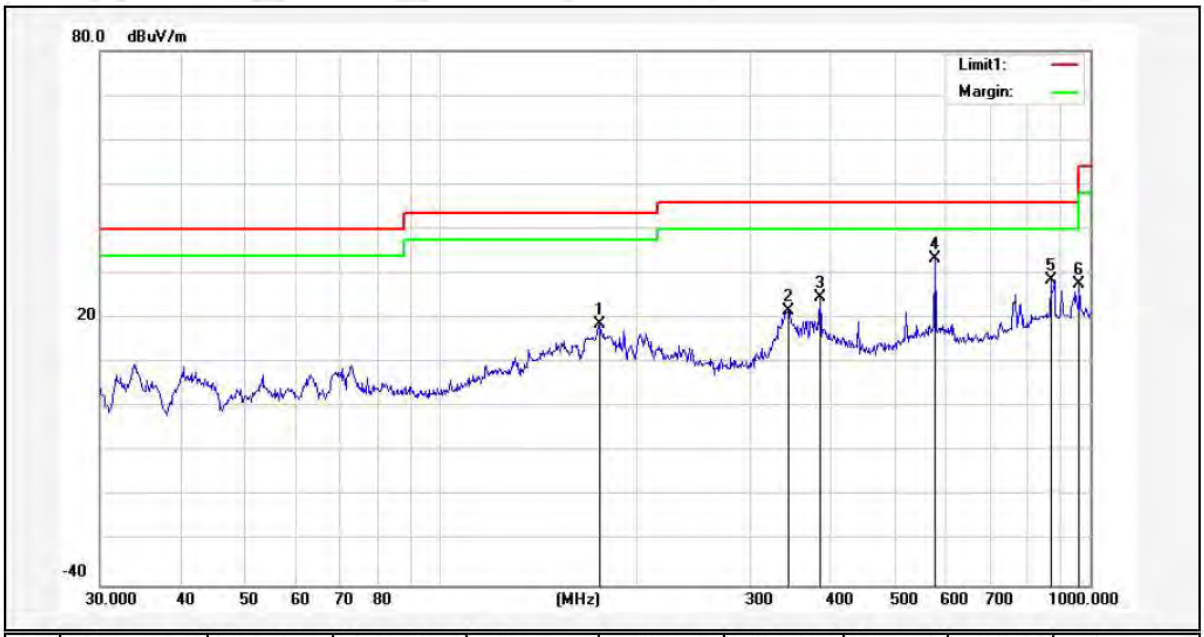

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	176.2686	39.35	-20.61	18.74	43.50	-24.76			QP
2	343.1800	38.85	-17.12	21.73	46.00	-24.27			QP
3	383.9318	40.43	-15.74	24.69	46.00	-21.31			QP
4*	576.6443	45.44	-12.18	33.26	46.00	-12.74			QP
5	869.1302	36.37	-7.72	28.65	46.00	-17.35			QP
6	962.1623	34.11	-6.56	27.55	54.00	-26.45			QP

Remark: Result = Reading Level + Factor, Margin = Result – Limit
Factor = Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	25℃	Relative Humidity:	60%
Test Date:	Apr. 01, 2025	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Vertical
Test Mode:	Transmitting mode of 802.11g MIMO		

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	34.0365	42.15	-21.85	20.30	40.00	-19.70			QP
2	62.8708	44.80	-26.00	18.80	40.00	-21.20			QP
3	145.8611	41.40	-19.40	22.00	43.50	-21.50			QP
4	155.3644	40.92	-20.11	20.81	43.50	-22.69			QP
5	576.6443	37.67	-12.18	25.49	46.00	-20.51			QP
6*	869.1302	39.11	-7.72	31.39	46.00	-14.61			QP

Remark: Result = Reading Level + Factor, Margin = Result – Limit
Factor = Ant. Factor + Cable Loss – Pre-amplifier

Remark：
1. Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, emission from 9kHz to 30MHz are more than 20dB below the limit, so it was not recorded in this report.
2. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
3. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1MHz for measuring above 1GHz, below 30MHz was 10kHz.

Above 1 GHz Test Results:

CH01 of 802.11b MIMO Mode (2412MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.65	-3.64	59.01	74	-14.99	PK
4824	50.68	-3.64	47.04	54	-6.96	AV
7236	58.27	-0.95	57.32	74	-16.68	PK
7236	46.46	-0.95	45.51	54	-8.49	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.45	-3.64	57.81	74	-16.19	PK
4824	49.54	-3.64	45.9	54	-8.1	AV
7236	59.57	-0.95	58.62	74	-15.38	PK
7236	47.34	-0.95	46.39	54	-7.61	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH06 of 802.11b MIMO Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.15	-3.51	58.64	74	-15.36	PK
4874	49.59	-3.51	46.08	54	-7.92	AV
7311	59.45	-0.82	58.63	74	-15.37	PK
7311	47.69	-0.82	46.87	54	-7.13	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.52	-3.51	58.01	74	-15.99	PK
4874	49.75	-3.51	46.24	54	-7.76	AV
7311	58.76	-0.82	57.94	74	-16.06	PK
7311	46.83	-0.82	46.01	54	-7.99	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH11 of 802.11b MIMO Mode (2462MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	61.52	-3.43	58.09	74	-15.91	PK
4924	50.12	-3.43	46.69	54	-7.31	AV
7386	58.69	-0.75	57.94	74	-16.06	PK
7386	46.61	-0.75	45.86	54	-8.14	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.52	-3.43	59.09	74	-14.91	PK
4924	49.62	-3.43	46.19	54	-7.81	AV
7386	58.55	-0.75	57.8	74	-16.2	PK
7386	46.73	-0.75	45.98	54	-8.02	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH01 of 802.11g MIMO Mode (2412MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.51	-3.64	57.87	74	-16.13	PK
4824	50.61	-3.64	46.97	54	-7.03	AV
7236	57.61	-0.95	56.66	74	-17.34	PK
7236	46.92	-0.95	45.97	54	-8.03	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	60.93	-3.64	57.29	74	-16.71	PK
4824	49.55	-3.64	45.91	54	-8.09	AV
7236	57.65	-0.95	56.7	74	-17.3	PK
7236	46.84	-0.95	45.89	54	-8.11	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH06 of 802.11g MIMO Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.53	-3.51	58.02	74	-15.98	PK
4874	49.87	-3.51	46.36	54	-7.64	AV
7311	57.66	-0.82	56.84	74	-17.16	PK
7311	46.51	-0.82	45.69	54	-8.31	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.42	-3.51	57.91	74	-16.09	PK
4874	49.12	-3.51	45.61	54	-8.39	AV
7311	57.69	-0.82	56.87	74	-17.13	PK
7311	46.74	-0.82	45.92	54	-8.08	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH11 of 802.11g MIMO Mode (2462MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	61.59	-3.43	58.16	74	-15.84	PK
4924	49.06	-3.43	45.63	54	-8.37	AV
7386	57.59	-0.75	56.84	74	-17.16	PK
7386	46.39	-0.75	45.64	54	-8.36	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	61.77	-3.43	58.34	74	-15.66	PK
4924	49.27	-3.43	45.84	54	-8.16	AV
7386	57.29	-0.75	56.54	74	-17.46	PK
7386	46.87	-0.75	46.12	54	-7.88	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH01 of 802.11n/HT20 MIMO Mode (2412MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.66	-3.64	58.02	74	-15.98	PK
4824	49.69	-3.64	46.05	54	-7.95	AV
7236	57.86	-0.95	56.91	74	-17.09	PK
7236	46.66	-0.95	45.71	54	-8.29	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.44	-3.64	57.8	74	-16.2	PK
4824	49.45	-3.64	45.81	54	-8.19	AV
7236	57.84	-0.95	56.89	74	-17.11	PK
7236	46.55	-0.95	45.6	54	-8.4	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH06 of 802.11n/HT20 MIMO Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	60.54	-3.51	57.03	74	-16.97	PK
4874	49.44	-3.51	45.93	54	-8.07	AV
7311	57.65	-0.82	56.83	74	-17.17	PK
7311	46.74	-0.82	45.92	54	-8.08	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.11	-3.51	57.6	74	-16.4	PK
4874	49.31	-3.51	45.8	54	-8.2	AV
7311	58.65	-0.82	57.83	74	-16.17	PK
7311	46.61	-0.82	45.79	54	-8.21	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH11of 802.11n/HT20 MIMO Mode (2462MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.99	-3.43	60.56	74	-13.44	PK
4924	49.58	-3.43	46.15	54	-7.85	AV
7386	57.45	-0.75	56.7	74	-17.3	PK
7386	46.46	-0.75	45.71	54	-8.29	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	65.94	-3.43	62.51	74	-11.49	PK
4924	49.35	-3.43	45.92	54	-8.08	AV
7386	57.14	-0.75	56.39	74	-17.61	PK
7386	46.64	-0.75	45.89	54	-8.11	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH03 of 802.11n/HT40 MIMO Mode (2422MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	60.58	-3.51	57.07	74	-16.93	PK
4844	49.48	-3.51	45.97	54	-8.03	AV
7266	57.61	-0.82	56.79	74	-17.21	PK
7266	46.72	-0.82	45.9	54	-8.1	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	61.14	-3.51	57.63	74	-16.37	PK
4844	49.37	-3.51	45.86	54	-8.14	AV
7266	58.61	-0.82	57.79	74	-16.21	PK
7266	46.16	-0.82	45.34	54	-8.66	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH06 of 802.11n/HT40 MIMO Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	60.58	-3.51	57.07	74	-16.93	PK
4874	49.55	-3.51	46.04	54	-7.96	AV
7311	57.46	-0.82	56.64	74	-17.36	PK
7311	46.65	-0.82	45.83	54	-8.17	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.15	-3.51	57.64	74	-16.36	PK
4874	49.35	-3.51	45.84	54	-8.16	AV
7311	58.53	-0.82	57.71	74	-16.29	PK
7311	46.64	-0.82	45.82	54	-8.18	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH09 of 802.11n/HT40 MIMO Mode (2452MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	60.49	-3.51	56.98	74	-17.02	PK
4902	49.48	-3.51	45.97	54	-8.03	AV
7356	57.62	-0.82	56.8	74	-17.2	PK
7356	46.73	-0.82	45.91	54	-8.09	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	61.12	-3.51	57.61	74	-16.39	PK
4902	49.35	-3.51	45.84	54	-8.16	AV
7356	58.67	-0.82	57.85	74	-16.15	PK
7356	46.66	-0.82	45.84	54	-8.16	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH01 of 802.11AX20 MIMO Mode (2412MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.5	-3.64	58.02	74	-15.98	PK
4824	49.69	-3.64	46.05	54	-7.95	AV
7236	57.86	-0.95	56.91	74	-17.09	PK
7236	46.66	-0.95	45.71	54	-8.29	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.44	-3.64	57.8	74	-16.2	PK
4824	49.45	-3.64	45.81	54	-8.19	AV
7236	57.84	-0.95	56.89	74	-17.11	PK
7236	46.55	-0.95	45.6	54	-8.4	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH06 of 802.11n/HT20 MIMO Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	60.54	-3.51	57.03	74	-16.97	PK
4874	49.44	-3.51	45.93	54	-8.07	AV
7311	57.65	-0.82	56.83	74	-17.17	PK
7311	46.74	-0.82	45.92	54	-8.08	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.11	-3.51	57.6	74	-16.4	PK
4874	49.31	-3.51	45.8	54	-8.2	AV
7311	58.65	-0.82	57.83	74	-16.17	PK
7311	46.61	-0.82	45.79	54	-8.21	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH11of 802.11n/HT20 MIMO Mode (2462MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.99	-3.43	60.56	74	-13.44	PK
4924	49.58	-3.43	46.15	54	-7.85	AV
7386	57.45	-0.75	56.7	74	-17.3	PK
7386	46.46	-0.75	45.71	54	-8.29	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	65.94	-3.43	62.51	74	-11.49	PK
4924	49.35	-3.43	45.92	54	-8.08	AV
7386	57.14	-0.75	56.39	74	-17.61	PK
7386	46.64	-0.75	45.89	54	-8.11	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH03 of 802.11n/HT40 MIMO Mode (2422MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	60.58	-3.51	57.07	74	-16.93	PK
4844	49.48	-3.51	45.97	54	-8.03	AV
7266	57.61	-0.82	56.79	74	-17.21	PK
7266	46.72	-0.82	45.9	54	-8.1	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	61.14	-3.51	57.63	74	-16.37	PK
4844	49.37	-3.51	45.86	54	-8.14	AV
7266	58.61	-0.82	57.79	74	-16.21	PK
7266	46.16	-0.82	45.34	54	-8.66	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH06 of 802.11n/HT40 MIMO Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	60.58	-3.51	57.07	74	-16.93	PK
4874	49.55	-3.51	46.04	54	-7.96	AV
7311	57.46	-0.82	56.64	74	-17.36	PK
7311	46.65	-0.82	45.83	54	-8.17	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.15	-3.51	57.64	74	-16.36	PK
4874	49.35	-3.51	45.84	54	-8.16	AV
7311	58.53	-0.82	57.71	74	-16.29	PK
7311	46.64	-0.82	45.82	54	-8.18	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH09 of 802.11n/HT40 MIMO Mode (2452MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	60.49	-3.51	56.98	74	-17.02	PK
4902	49.48	-3.51	45.97	54	-8.03	AV
7356	57.62	-0.82	56.8	74	-17.2	PK
7356	46.73	-0.82	45.91	54	-8.09	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	61.12	-3.51	57.61	74	-16.39	PK
4902	49.35	-3.51	45.84	54	-8.16	AV
7356	58.67	-0.82	57.85	74	-16.15	PK
7356	46.66	-0.82	45.84	54	-8.16	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH01 of 802.11AX20 MIMO Mode (2412MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.58	-3.64	57.94	74	-16.06	PK
4824	49.45	-3.64	45.81	54	-8.19	AV
7236	57.87	-0.95	56.92	74	-17.08	PK
7236	46.69	-0.95	45.74	54	-8.26	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.59	-3.64	57.95	74	-16.05	PK
4824	49.55	-3.64	45.91	54	-8.09	AV
7236	57.86	-0.95	56.91	74	-17.09	PK
7236	46.65	-0.95	45.7	54	-8.3	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH06 of 802.11AX20 MIMO Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	60.56	-3.51	57.05	74	-16.95	PK
4874	49.48	-3.51	45.97	54	-8.03	AV
7311	57.68	-0.82	56.86	74	-17.14	PK
7311	46.76	-0.82	45.94	54	-8.06	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.16	-3.51	57.65	74	-16.35	PK
4874	49.33	-3.51	45.82	54	-8.18	AV
7311	58.48	-0.82	57.66	74	-16.34	PK
7311	46.63	-0.82	45.81	54	-8.19	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH11of 802.11AX20 MIMO Mode (2462MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.95	-3.43	60.52	74	-13.48	PK
4924	49.57	-3.43	46.14	54	-7.86	AV
7386	57.46	-0.75	56.71	74	-17.29	PK
7386	46.48	-0.75	45.73	54	-8.27	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	65.96	-3.43	62.53	74	-11.47	PK
4924	49.37	-3.43	45.94	54	-8.06	AV
7386	57.13	-0.75	56.38	74	-17.62	PK
7386	46.64	-0.75	45.89	54	-8.11	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH03 of 802.11AX40 MIMO Mode (2422MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	60.51	-3.51	57	74	-17	PK
4844	49.45	-3.51	45.94	54	-8.06	AV
7266	57.63	-0.82	56.81	74	-17.19	PK
7266	46.72	-0.82	45.9	54	-8.1	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	61.16	-3.51	57.65	74	-16.35	PK
4844	49.38	-3.51	45.87	54	-8.13	AV
7266	58.68	-0.82	57.86	74	-16.14	PK
7266	46.17	-0.82	45.35	54	-8.65	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH06 of 802.11AX40 MIMO Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	59.56	-3.51	56.05	74	-17.95	PK
4874	49.74	-3.51	46.23	54	-7.77	AV
7311	57.48	-0.82	56.66	74	-17.34	PK
7311	47.26	-0.82	46.44	54	-7.56	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	58.65	-3.51	55.14	74	-18.86	PK
4874	49.37	-3.51	45.86	54	-8.14	AV
7311	58.57	-0.82	57.75	74	-16.25	PK
7311	46.49	-0.82	45.67	54	-8.33	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH09 of 802.11AX40 MIMO Mode (2452MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	58.45	-3.51	54.94	74	-19.06	PK
4902	49.44	-3.51	45.93	54	-8.07	AV
7356	57.66	-0.82	56.84	74	-17.16	PK
7356	46.76	-0.82	45.94	54	-8.06	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	57.46	-3.51	53.95	74	-20.05	PK
4902	49.38	-3.51	45.87	54	-8.13	AV
7356	58.64	-0.82	57.82	74	-16.18	PK
7356	45.26	-0.82	44.44	54	-9.56	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Remark:
1. Measuring frequencies from 1GHz to the 25GHz.
2. “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
3. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
4. The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
5. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1GHz, below 30MHz was 10kHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
6. When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20dBuV/m(PK Value) <54dBuV/m(AV Limit), the Average Detected not need to completed.
7. All modes of operation were investigated and the worst-case emissions are reported.

Operation Mode: CH01 of 802.11b MIMO Mode (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	58.55	-5.81	52.74	74	-21.26	PK
2310	/	-5.81	/	54	/	AV
2390	66.35	-5.84	60.51	74	-13.49	PK
2390	48.75	-5.84	42.91	54	-11.09	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.69	-5.81	51.88	74	-22.12	PK
2310	/	-5.81	/	54	/	AV
2390	66.69	-5.84	60.85	74	-13.15	PK
2390	49.44	-5.84	43.6	54	-10.4	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH11 of 802.11b MIMO Mode (2462MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.66	-5.65	52.01	74	-21.99	PK
2483.5	/	-5.65	/	54	/	AV
2500	58.11	-5.72	52.39	74	-21.61	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.74	-5.65	52.09	74	-21.91	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.65	-5.72	51.93	74	-22.07	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH01 of 802.11g MIMO Mode (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.88	-5.81	52.07	74	-21.93	PK
2310	/	-5.81	/	54	/	AV
2390	65.68	-5.84	59.84	74	-14.16	PK
2390	49.55	-5.84	43.71	54	-10.29	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.23	-5.81	51.42	74	-22.58	PK
2310	/	-5.81	/	54	/	AV
2390	66.33	-5.84	60.49	74	-13.51	PK
2390	48.11	-5.84	42.27	54	-11.73	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH11 of 802.11g MIMO Mode (2462MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.64	-5.65	51.99	74	-22.01	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.64	-5.72	51.92	74	-22.08	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.33	-5.65	51.68	74	-22.32	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.34	-5.72	51.62	74	-22.38	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH01 of 802.11n/HT20 MIMO Mode (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.85	-5.81	52.04	74	-21.96	PK
2310	/	-5.81	/	54	/	AV
2390	66.25	-5.84	60.41	74	-13.59	PK
2390	48.84	-5.84	43	54	-11	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.99	-5.81	52.18	74	-21.82	PK
2310	/	-5.81	/	54	/	AV
2390	65.65	-5.84	59.81	74	-14.19	PK
2390	48.24	-5.84	42.4	54	-11.6	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH11 of 802.11n/HT20 MIMO Mode (2462MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.64	-5.65	51.99	74	-22.01	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.34	-5.72	51.62	74	-22.38	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.66	-5.65	52.01	74	-21.99	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.74	-5.72	52.02	74	-21.98	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH03 of 802.11n/HT40 MIMO Mode (2422MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.85	-5.81	52.04	74	-21.96	PK
2310	/	-5.81	/	54	/	AV
2390	66.25	-5.84	60.41	74	-13.59	PK
2390	48.84	-5.84	43	54	-11	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.99	-5.81	52.18	74	-21.82	PK
2310	/	-5.81	/	54	/	AV
2390	65.65	-5.84	59.81	74	-14.19	PK
2390	48.24	-5.84	42.4	54	-11.6	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH09 of 802.11n/HT40 MIMO Mode (2452MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.64	-5.65	51.99	74	-22.01	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.34	-5.72	51.62	74	-22.38	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.66	-5.65	52.01	74	-21.99	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.74	-5.72	52.02	74	-21.98	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH01 of 802.11n/AX20 MIMO Mode (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	56.59	-5.81	50.78	74	-23.22	PK
2310	/	-5.81	/	54	/	AV
2390	65.23	-5.84	59.39	74	-14.61	PK
2390	48.59	-5.84	42.75	54	-11.25	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.45	-5.81	51.64	74	-22.36	PK
2310	/	-5.81	/	54	/	AV
2390	64.26	-5.84	58.42	74	-15.58	PK
2390	48.46	-5.84	42.62	54	-11.38	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH11 of 802.11AX20 MIMO Mode (2462MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.45	-5.65	51.8	74	-22.2	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.38	-5.72	51.66	74	-22.34	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	56.69	-5.65	51.04	74	-22.96	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.77	-5.72	52.05	74	-21.95	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH03 of 802.11AX40 MIMO Mode (2422MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	56.26	-5.81	50.45	74	-23.55	PK
2310	/	-5.81	/	54	/	AV
2390	64.26	-5.84	58.42	74	-15.58	PK
2390	48.87	-5.84	43.03	54	-10.97	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	54.26	-5.81	48.45	74	-25.55	PK
2310	/	-5.81	/	54	/	AV
2390	64.35	-5.84	58.51	74	-15.49	PK
2390	48.65	-5.84	42.81	54	-11.19	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH09 of 802.11X40 MIMO Mode (2452MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	54.26	-5.65	48.61	74	-25.39	PK
2483.5	/	-5.65	/	54	/	AV
2500	55.35	-5.72	49.63	74	-24.37	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	54.26	-5.65	48.61	74	-25.39	PK
2483.5	/	-5.65	/	54	/	AV
2500	55.32	-5.72	49.6	74	-24.4	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Note:

1. Since the peak value is less than the average limit, the average value does not reflected in the report.

4 6dB OCCUPIED BANDWIDTH

4.1 TEST LIMIT

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

4.2 TEST PROCEDURE

4.2.1 6dB BANDWIDTH MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW≥3×RBW.
4. Set SPA Trace 1 Max hold, then View.

4.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

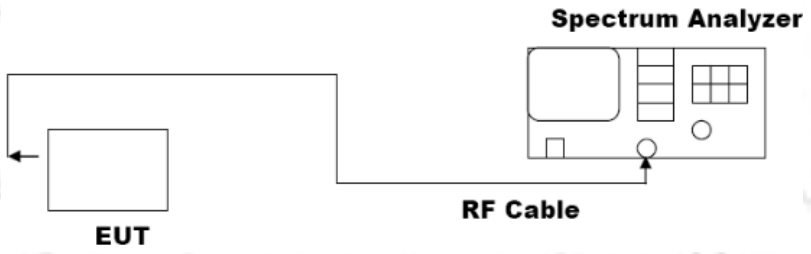

4.4 MEASUREMENT EQUIPMENT USED

The same as described in section 2.7.

4.5 TEST RESULT

PASS

Please Refer to Appendix 2.4G WIFI RF test data for Details

5 POWER SPECTRAL DENSITY

5.1 TEST LIMIT

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

(1) Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
(2)Set the EUT Work on the top, the middle and the bottom operation frequency individually.
(3)Set SPA Trace 1 Max hold, then View.
Note: The method of AVGPSD-1 in the ANSI C63.10 (2013) item 11.10 was used in this testing.

5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

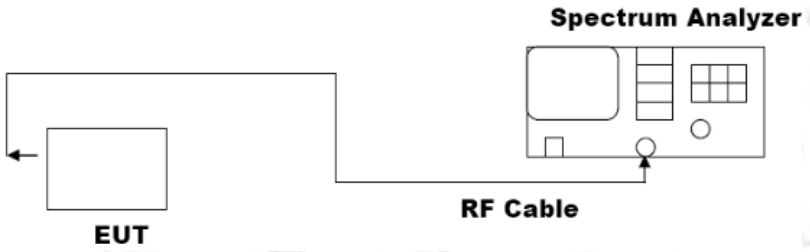

5.4 EQUIPMENT USED

The same as described in section 2.7.

5.5 TEST RESULT

PASS
Please Refer to Appendix 2.4G WIFI RF test data for Details

6 AVERAGE OUTPUT POWER

6.1 TEST LIMIT

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Average Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.2 TEST PROCEDURE

For average power test:

1. Connect EUT RF output port to Spectrum Analyzer.
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Record the average output power from the software.

Note：The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

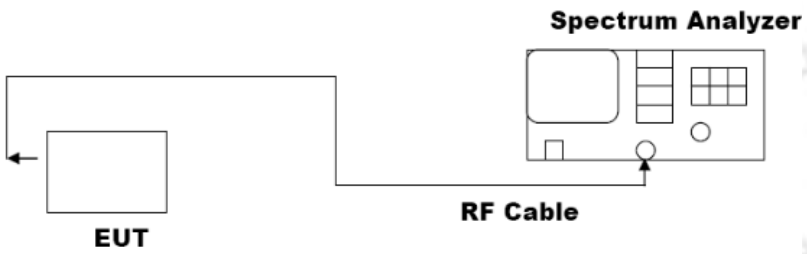

6.4 EQUIPMENT USED

The same as described in section 2.7.

6.5 TEST RESULT

PASS

Please Refer to Appendix 2.4G WIFI RF test data for Details

7 OUT OF BAND EMISSIONS

7.1 TEST LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

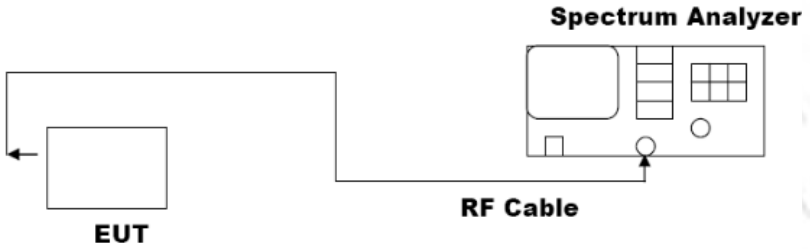

7.3 TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on FCC Part15 C Section 15.247: RBW=100kHz, VBW=300kHz.
4. Set detected by the spectrum analyzer with peak detector.

7.4 MEASUREMENT EQUIPMENT USED

The same as described in section 2.7.

7.5 TEST RESULT

PASS

Please Refer to Appendix 2.4G WIFI RF test data for Details

8 ANTENNA REQUIREMENT

Standard Applicable:
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction
The antenna used in this product is a FPC Antenna, The directional gains of antenna used for transmitting is 1.82dBi.

ANTENNA:

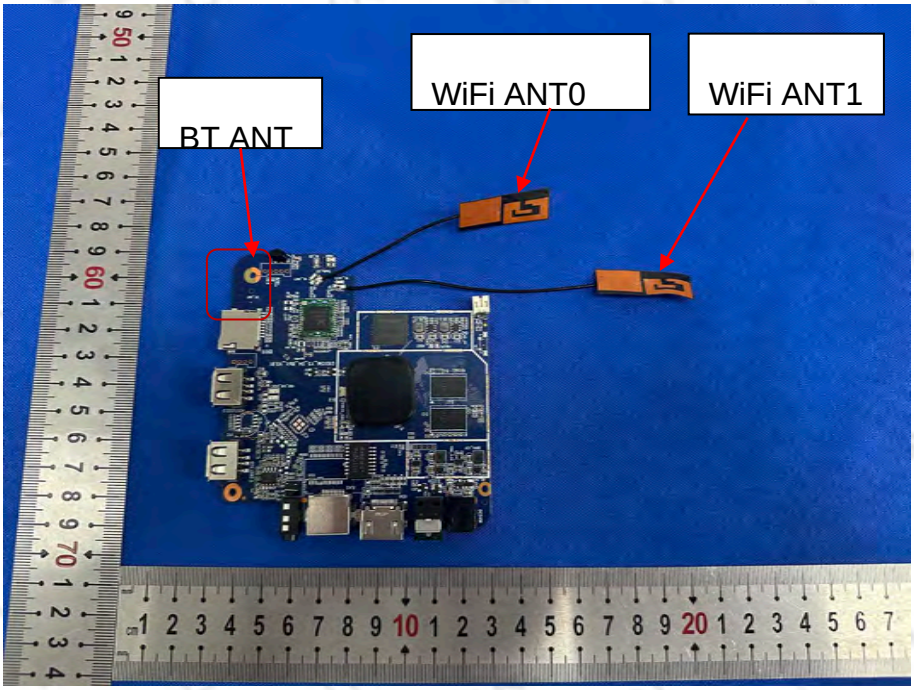

9 PHOTO OF TEST

RADIATED EMISSION

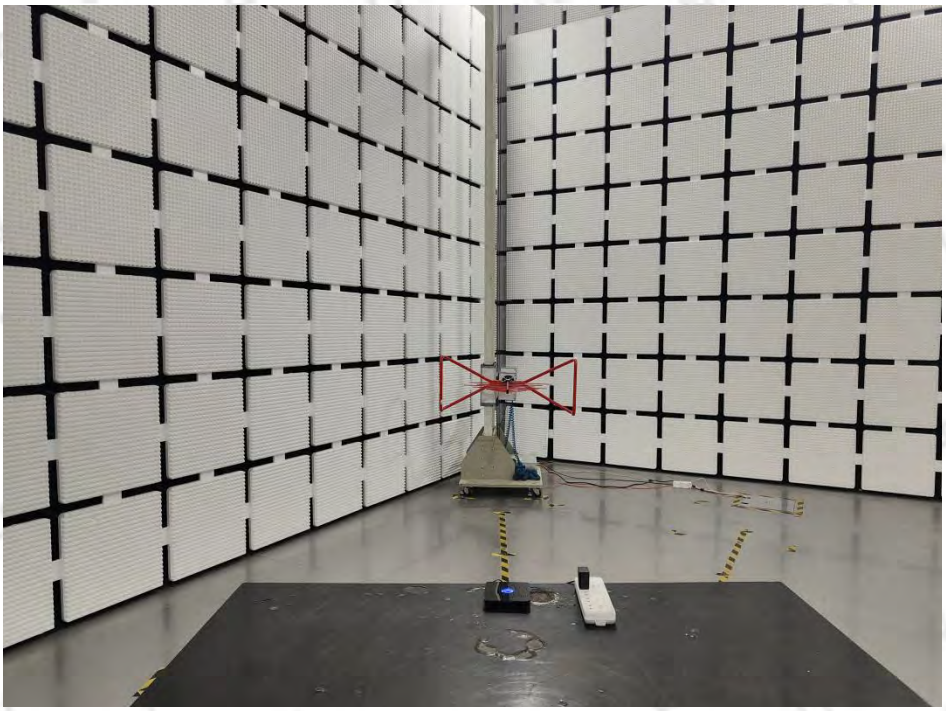

30MHz-1000MHz

Above 1GHz

CONDUCTED EMISSION

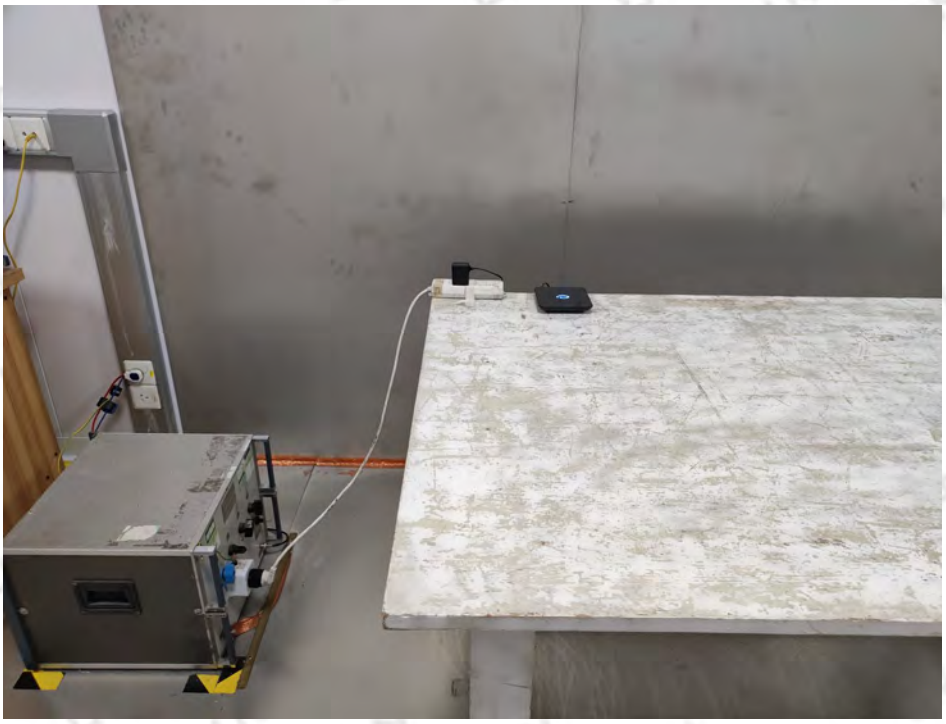

RF CONDUCTED

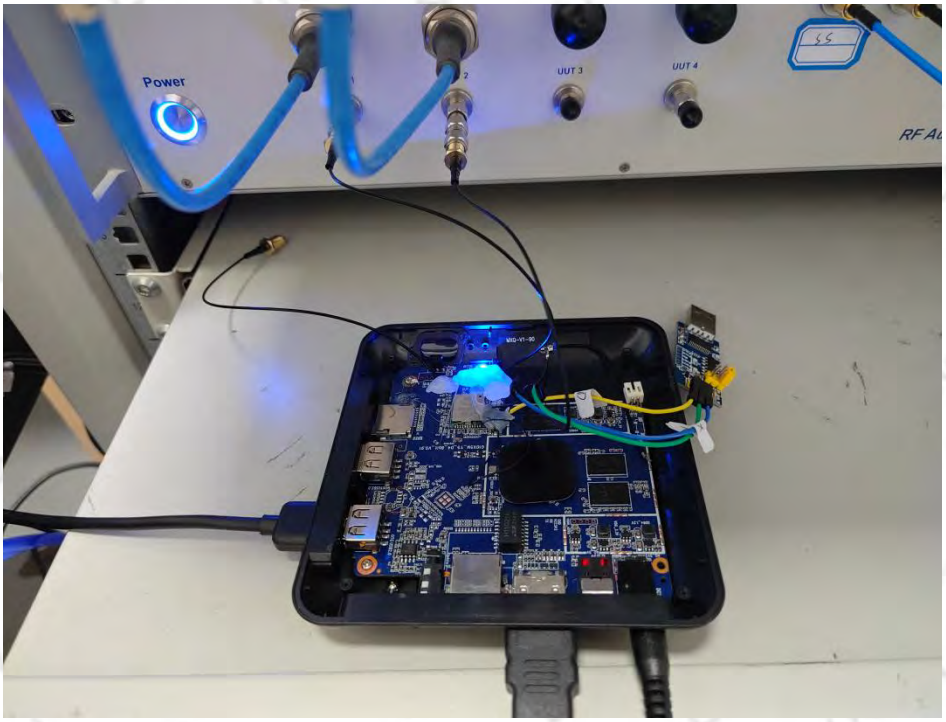

10 EUT Constructional Details

Refer to the External Photos and Internal Photos for details.

End of Report