


Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2412MHz
Test By :Cyril Chen

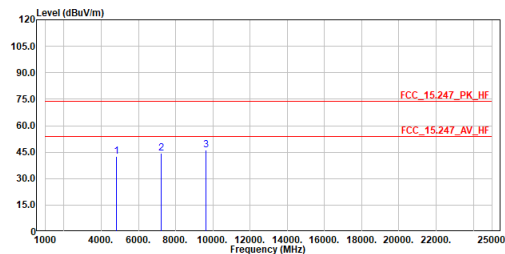


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	42.48	74.00	-31.52	60.24	-17.76	Peak
2	7236.000	44.24	74.00	-29.76	57.02	-12.78	Peak
3	9648.000	46.39	74.00	-27.61	55.48	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2412MHz
Test By :Cyril Chen

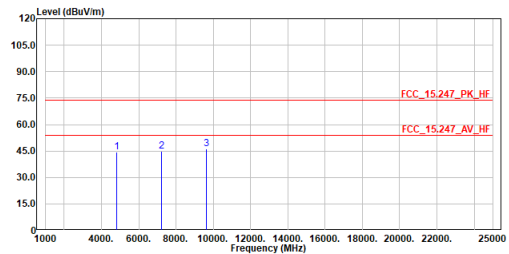


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	44.47	74.00	-29.53	62.23	-17.76	Peak
2	7236.000	44.63	74.00	-29.37	57.41	-12.78	Peak
3	9648.000	46.21	74.00	-27.79	55.30	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2437MHz
Test By :Cyril Chen

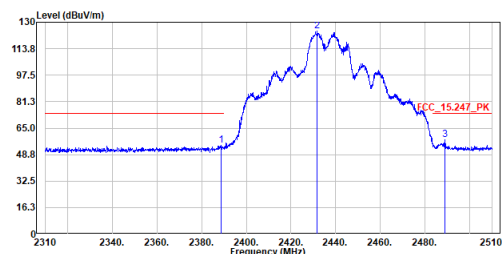


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.600	54.23	74.00	-19.77	43.83	10.40	Peak
2	2431.600	124.65	-----	-----	114.14	10.51	Peak
3	2489.100	57.69	74.00	-16.31	47.04	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be20_TX_2437MHz
Test By :Cyril Chen

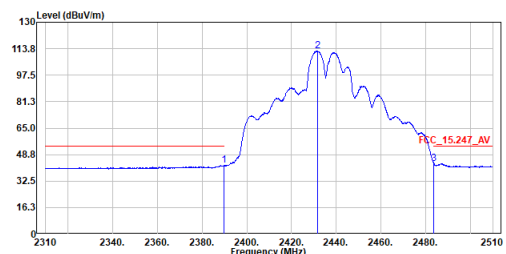


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	42.06	54.00	-11.94	31.65	10.41	Average
2	2431.500	112.21	-----	-----	101.70	10.51	Average
3	2483.600	43.31	54.00	-10.69	32.67	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2437MHz
Test By :Cyril Chen

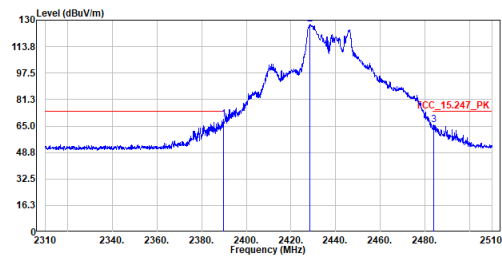


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2389.800	69.32	74.00	-4.68	58.91	10.41	Peak
2	2428.600	127.46	-----	-----	116.96	10.50	Peak
3	2483.800	65.71	74.00	-8.29	55.06	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be20_TX_2437MHz
Test By :Cyril Chen

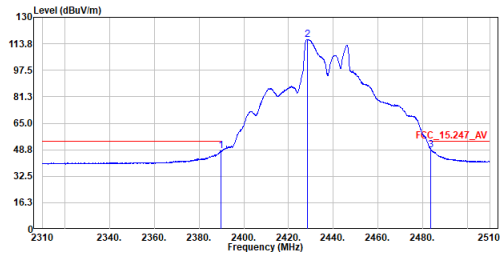


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2389.800	48.04	54.00	-5.96	37.63	10.41	Average
2	2428.500	116.42	-----	-----	105.92	10.50	Average
3	2483.600	48.76	54.00	-5.24	38.12	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2437MHz
Test By :Cyril Chen

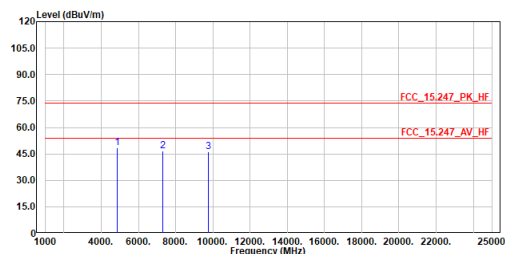


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4874.000	48.67	74.00	-25.33	66.29	-17.62	Peak
2	7311.000	46.53	74.00	-27.47	59.19	-12.66	Peak
3	9748.000	46.17	74.00	-27.83	55.15	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2437MHz
Test By :Cyril Chen

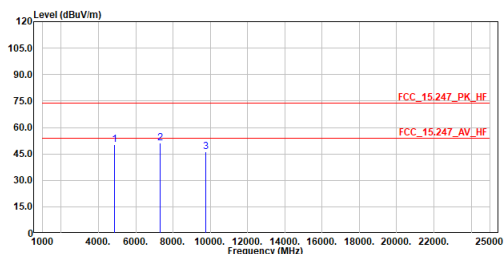


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4874.000	50.45	74.00	-23.55	68.07	-17.62	Peak
2	7311.000	51.22	74.00	-22.78	63.88	-12.66	Peak
3	9748.000	45.98	74.00	-28.02	54.96	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2462MHz
Test By :Cyril Chen

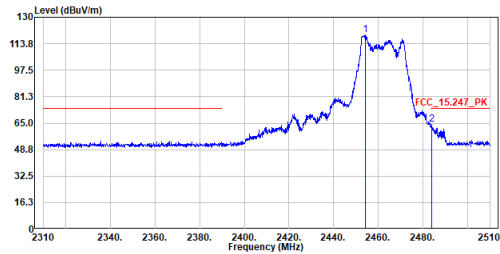


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2454.300	119.03	-----	-----	108.46	10.57	Peak
2	2484.000	64.15	74.00	-9.85	53.50	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be20_TX_2462MHz
Test By :Cyril Chen

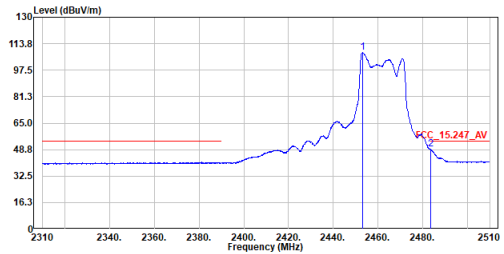


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2453.000	108.24	-----	-----	97.68	10.56	Average
2	2483.700	48.94	54.00	-5.06	38.29	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2462MHz
Test By :Cyril Chen

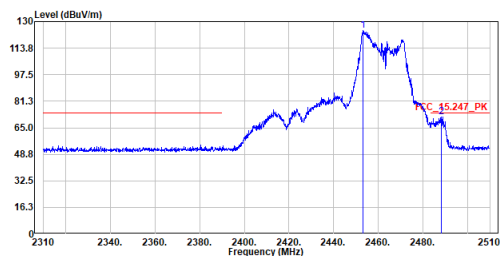


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2453.100	124.58	-----	-----	114.02	10.56	Peak
2	2488.100	71.82	74.00	-2.18	61.17	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be20_TX_2462MHz
Test By :Cyril Chen

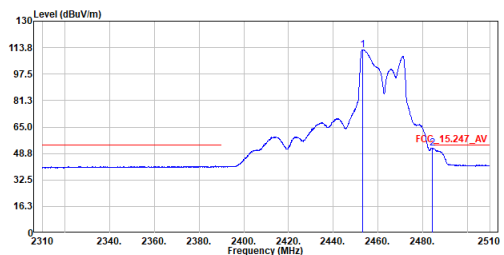


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2453.200	112.49	-----	-----	101.93	10.56	Average
2	2484.400	52.21	54.00	-1.79	41.56	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2462MHz
Test By :Cyril Chen

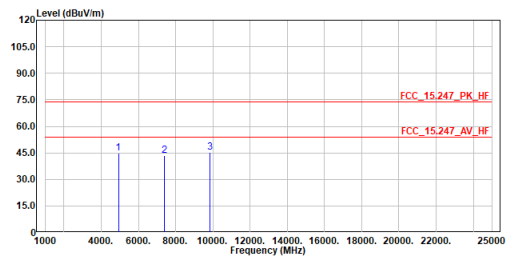


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	4924.000	44.76	74.00	-29.24	62.25	-17.49	Peak
2	7386.000	43.69	74.00	-30.31	56.22	-12.53	Peak
3	9848.000	45.38	74.00	-28.62	54.23	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2462MHz
Test By :Cyril Chen

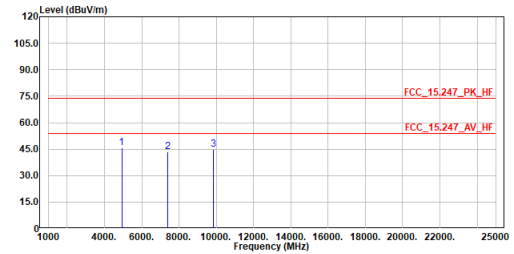


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	4924.000	45.76	74.00	-28.24	63.25	-17.49	Peak
2	7386.000	43.62	74.00	-30.38	56.15	-12.53	Peak
3	9848.000	44.94	74.00	-29.06	53.79	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2422MHz
Test By :Cyril Chen

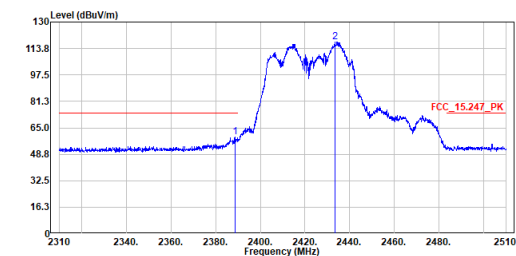


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2388.600	59.22	74.00	-14.78	48.82	10.40	Peak
2	2433.400	117.83	-----	-----	107.31	10.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be40_TX_2422MHz
Test By :Cyril Chen

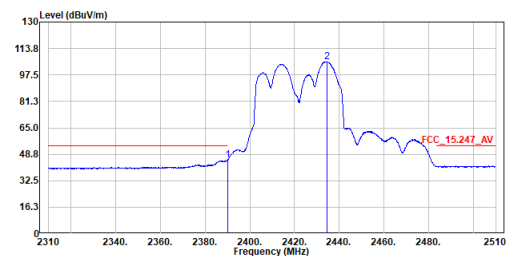


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2390.000	45.34	54.00	-8.66	34.93	10.41	Average
2	2434.700	105.63	-----	-----	95.11	10.52	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2422MHz
Test By :Cyril Chen

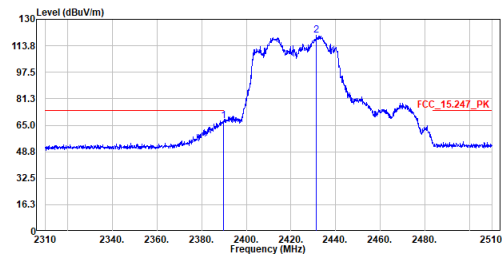


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.900	67.67	74.00	-6.33	57.26	10.41	Peak
2	2431.300	120.02	-----	-----	109.51	10.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be40_TX_2422MHz
Test By :Cyril Chen

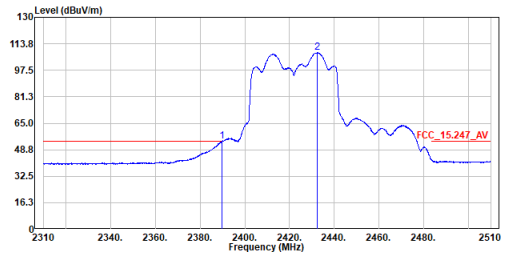


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.900	53.87	54.00	-0.13	43.46	10.41	Average
2	2432.500	108.46	-----	-----	97.94	10.52	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2422MHz
Test By :Cyril Chen

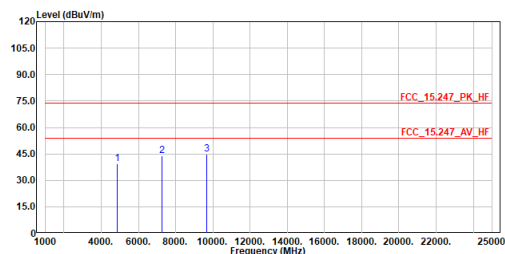


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4844.000	39.59	74.00	-34.41	57.29	-17.70	Peak
2	7266.000	43.77	74.00	-30.23	56.50	-12.73	Peak
3	9688.000	44.91	74.00	-29.09	53.96	-9.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2422MHz
Test By :Cyril Chen

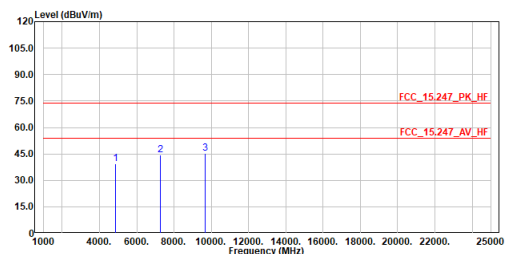


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4844.000	39.32	74.00	-34.68	57.02	-17.70	Peak
2	7266.000	44.47	74.00	-29.53	57.20	-12.73	Peak
3	9688.000	45.14	74.00	-28.86	54.19	-9.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2437MHz
Test By :Cyril Chen

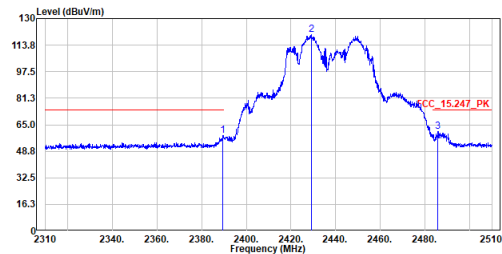


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.500	58.45	74.00	-15.55	48.04	10.41	Peak
2	2429.000	120.33	-----	-----	109.83	10.50	Peak
3	2485.000	60.79	74.00	-13.21	50.14	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be40_TX_2437MHz
Test By :Cyril Chen

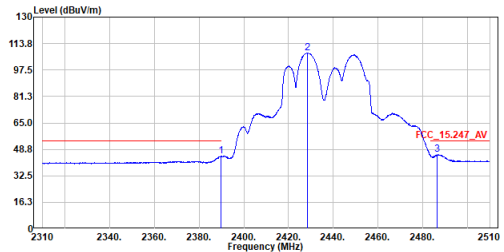


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.900	44.63	54.00	-9.37	34.22	10.41	Average
2	2428.400	108.09	-----	-----	97.59	10.50	Average
3	2486.300	45.60	54.00	-8.40	34.95	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2437MHz
Test By :Cyril Chen

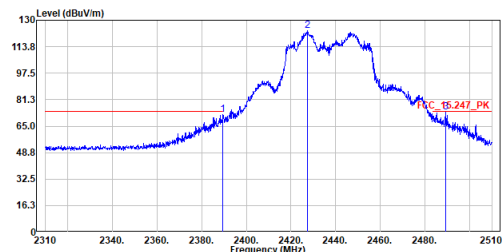


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.400	72.28	74.00	-1.72	61.87	10.41	Peak
2	2427.200	123.46	-----	-----	112.96	10.50	Peak
3	2489.300	73.63	74.00	-0.37	62.97	10.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be40_TX_2437MHz
Test By :Cyril Chen

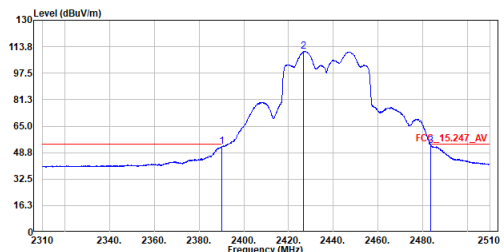


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2390.000	52.36	54.00	-1.64	41.95	10.41	Average
2	2426.700	110.86	-----	-----	100.36	10.50	Average
3	2483.600	52.99	54.00	-1.01	42.35	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2437MHz
Test By :Cyril Chen

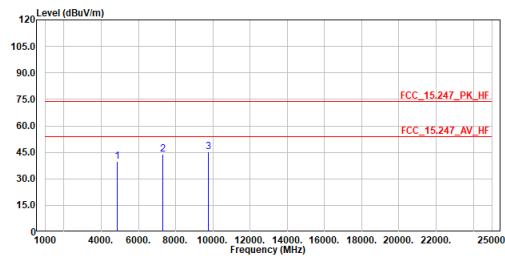


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	39.76	74.00	-34.24	57.38	-17.62	Peak
2	7311.000	44.04	74.00	-29.96	56.70	-12.66	Peak
3	9748.000	45.34	74.00	-28.66	54.32	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2437MHz
Test By :Cyril Chen

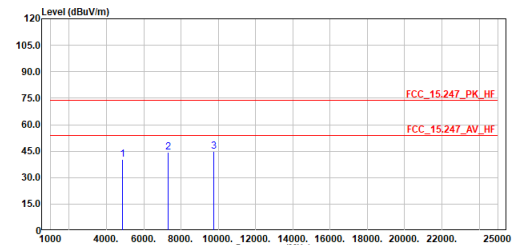


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	40.31	74.00	-33.69	57.93	-17.62	Peak
2	7311.000	44.40	74.00	-29.60	57.06	-12.66	Peak
3	9748.000	44.74	74.00	-29.26	53.72	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2452MHz
Test By :Cyril Chen

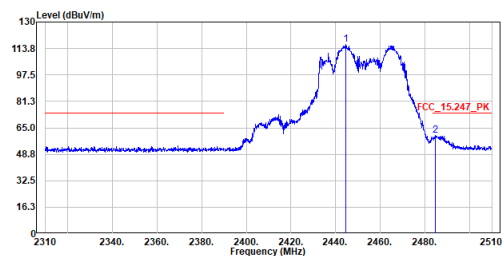


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2444.400	116.27	-----	-----	105.73	10.54	Peak
2	2484.700	60.53	74.00	-13.47	49.88	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be40_TX_2452MHz
Test By :Cyril Chen

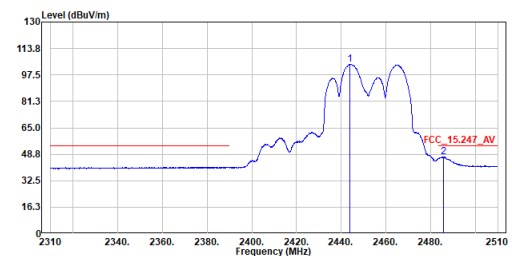


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2443.900	104.07	-----	-----	93.53	10.54	Average
2	2485.800	47.14	54.00	-6.86	36.49	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2452MHz
Test By :Cyril Chen

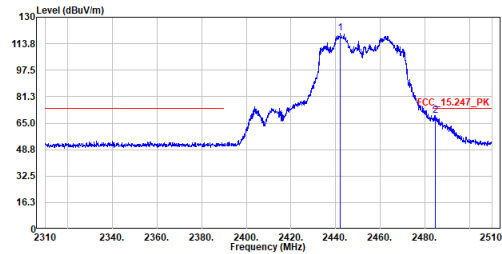


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2442.000	120.15	-----	-----	109.61	10.54	Peak
2	2484.600	69.58	74.00	-4.42	58.93	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be40_TX_2452MHz
Test By :Cyril Chen

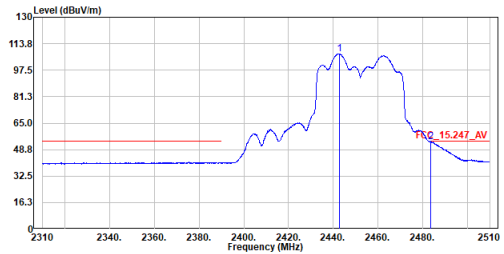


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2442.700	107.59	-----	-----	97.05	10.54	Average
2	2483.600	53.35	54.00	-0.65	42.71	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2452MHz
Test By :Cyril Chen

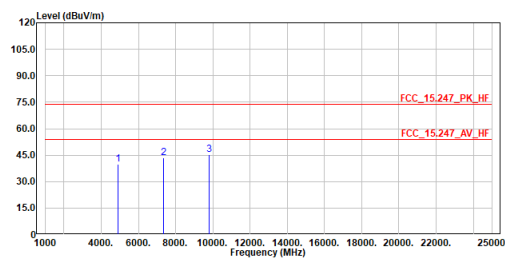


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4904.000	39.77	74.00	-34.23	57.31	-17.54	Peak
2	7356.000	43.46	74.00	-30.54	56.03	-12.57	Peak
3	9808.000	45.41	74.00	-28.59	54.31	-8.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2452MHz
Test By :Cyril Chen

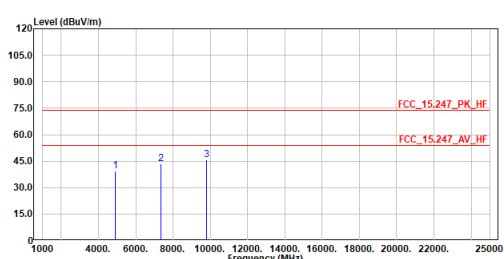


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4904.000	39.26	74.00	-34.74	56.80	-17.54	Peak
2	7356.000	43.57	74.00	-30.43	56.14	-12.57	Peak
3	9808.000	45.76	74.00	-28.24	54.66	-8.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

<4TX, Nss1, MRU mode>

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2412MHz
Test By :Cyril Chen

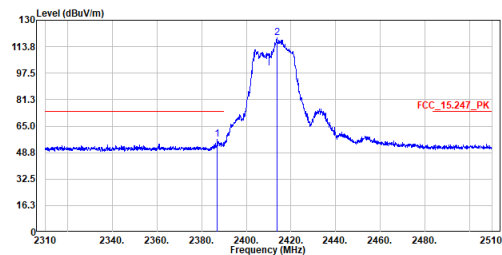


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2387.000	56.71	74.00	-17.29	46.31	10.40	Peak
2	2413.600	118.99	-----	-----	108.52	10.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be20_TX_2412MHz
Test By :Cyril Chen

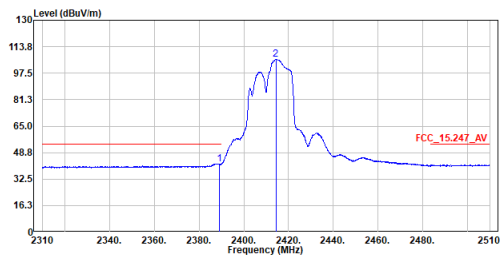


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2388.900	41.92	54.00	-12.08	31.52	10.40	Average
2	2414.300	106.08	-----	-----	95.61	10.47	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2412MHz
Test By :Cyril Chen

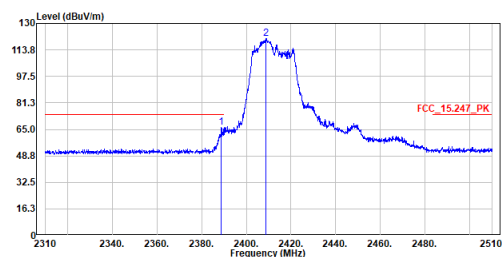


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2388.800	66.08	74.00	-7.92	55.68	10.40	Peak
2	2408.600	120.80	-----	-----	110.34	10.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be20_TX_2412MHz
Test By :Cyril Chen

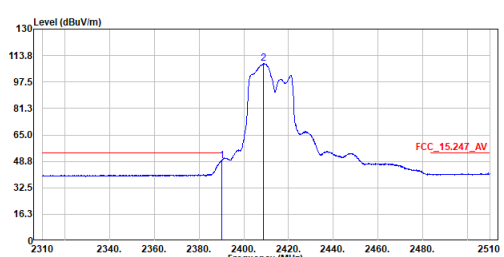


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2390.000	49.07	54.00	-4.93	38.66	10.41	Average
2	2408.800	108.89	-----	-----	98.43	10.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2412MHz
Test By :Cyril Chen

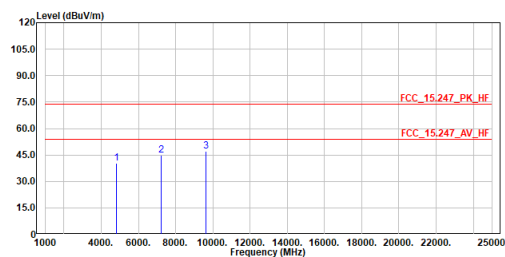


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	40.28	74.00	-33.72	58.04	-17.76	Peak
2	7236.000	44.97	74.00	-29.03	57.75	-12.78	Peak
3	9648.000	47.02	74.00	-26.98	56.11	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2412MHz
Test By :Cyril Chen

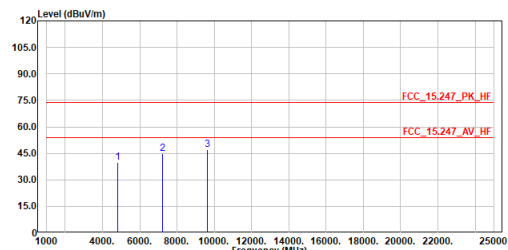


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	39.77	74.00	-34.23	57.53	-17.76	Peak
2	7236.000	44.87	74.00	-29.13	57.65	-12.78	Peak
3	9648.000	47.13	74.00	-26.87	56.22	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2437MHz
Test By :Cyril Chen

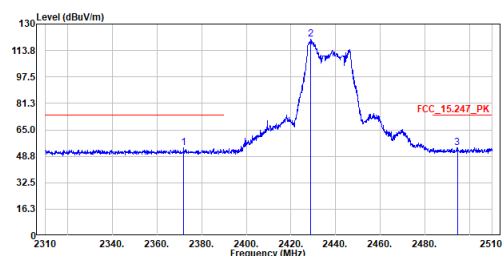


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2371.000	53.89	74.00	-20.11	43.53	10.36	Peak
2	2428.000	120.62	74.00	46.62	110.12	10.50	Peak
3	2494.500	54.04	74.00	-19.96	43.38	10.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be20_TX_2437MHz
Test By :Cyril Chen

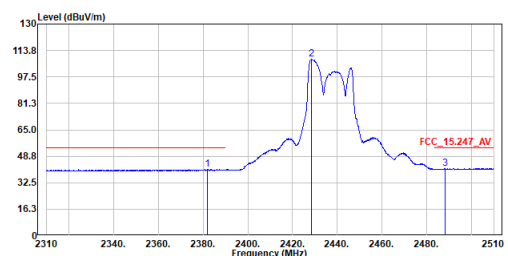


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2381.900	40.55	54.00	-13.45	30.17	10.38	Average
2	2428.400	108.21	54.00	54.21	97.71	10.50	Average
3	2488.200	41.17	54.00	-12.83	30.52	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2437MHz
Test By :Cyril Chen

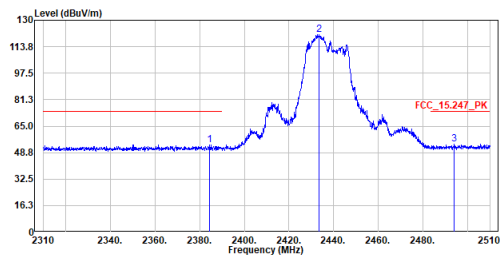


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2384.500	53.46	74.00	-20.54	43.07	10.39	Peak
2	2433.500	121.29	-----	-----	118.77	10.52	Peak
3	2494.000	53.76	74.00	-20.24	43.10	10.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be20_TX_2437MHz
Test By :Cyril Chen

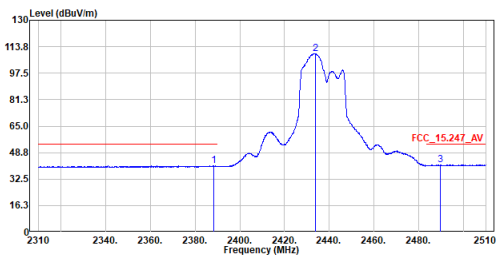


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2388.200	40.66	54.00	-13.34	30.26	10.40	Average
2	2433.800	109.50	-----	-----	98.98	10.52	Average
3	2489.700	41.36	54.00	-12.64	30.70	10.66	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2437MHz
Test By :Cyril Chen

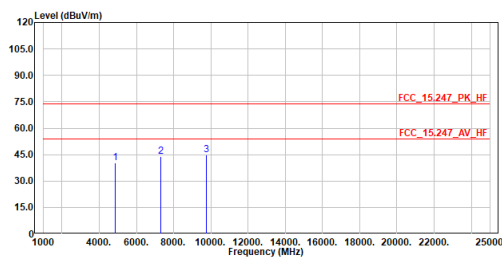


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	40.19	74.00	-33.81	57.81	-17.62	Peak
2	7311.000	43.88	74.00	-30.12	56.54	-12.66	Peak
3	9748.000	44.88	74.00	-29.12	53.86	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2437MHz
Test By :Cyril Chen

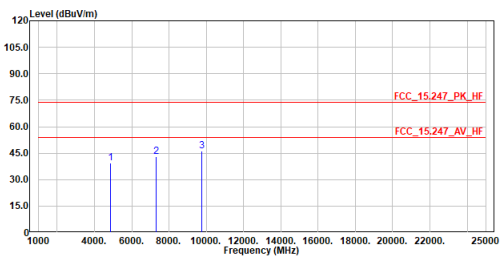


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	39.36	74.00	-34.64	56.98	-17.62	Peak
2	7311.000	43.15	74.00	-30.85	55.81	-12.66	Peak
3	9748.000	46.20	74.00	-27.80	55.18	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2462MHz
Test By :Cyril Chen

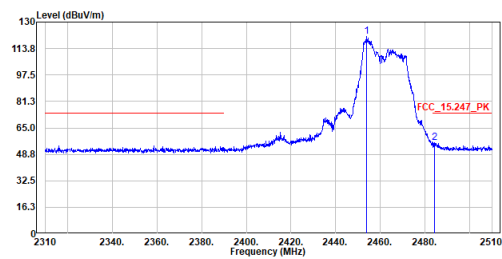


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2453.800	121.40	-----	-----	110.83	10.57	Peak
2	2484.300	56.09	74.00	-17.91	45.44	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be20_TX_2462MHz
Test By :Cyril Chen

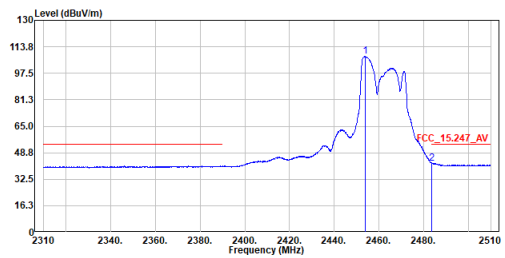


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2453.800	107.79	-----	-----	97.22	10.57	Average
2	2483.600	42.38	54.00	-11.62	31.74	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2462MHz
Test By :Cyril Chen

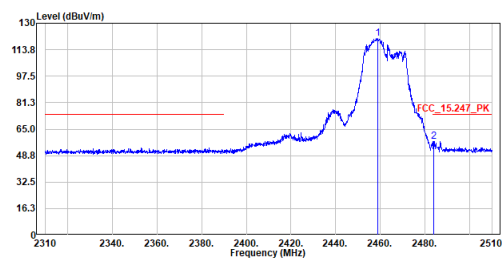


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2458.900	120.44	-----	-----	109.87	10.57	Peak
2	2484.100	57.40	74.00	-16.60	46.75	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be20_TX_2462MHz
Test By :Cyril Chen

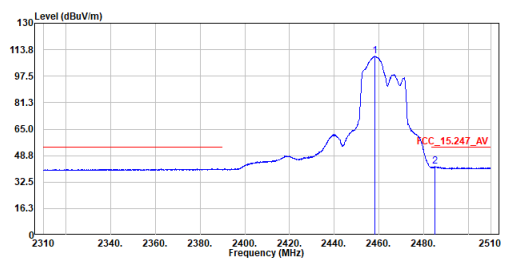


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2458.100	109.74	-----	-----	99.17	10.57	Average
2	2484.900	42.15	54.00	-11.85	31.50	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_2462MHz
Test By :Cyril Chen

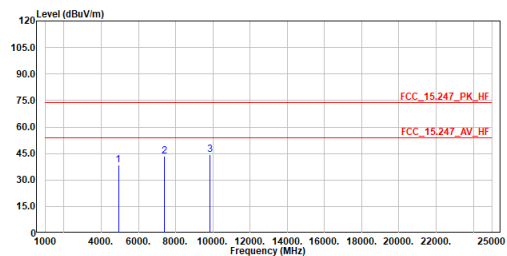


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	38.33	74.00	-35.67	55.82	-17.49	Peak
2	7386.000	43.33	74.00	-30.67	55.86	-12.53	Peak
3	9848.000	44.56	74.00	-29.44	53.41	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_2462MHz
Test By :Cyril Chen

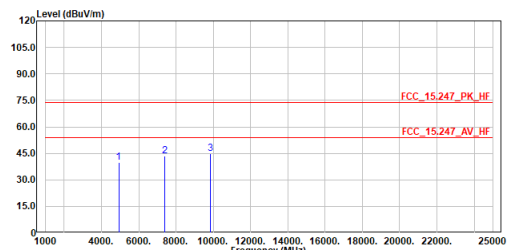


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	39.81	74.00	-34.19	57.30	-17.49	Peak
2	7386.000	43.60	74.00	-30.40	56.13	-12.53	Peak
3	9848.000	45.02	74.00	-28.98	53.87	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2422MHz
Test By :Cyril Chen

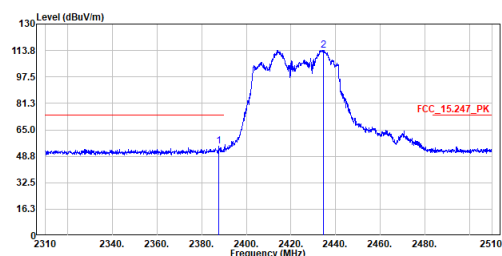


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2387.800	54.80	74.00	-19.20	44.40	10.40	Peak
2	2434.500	113.99	-----	-----	103.47	10.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be40_TX_2422MHz
Test By :Cyril Chen

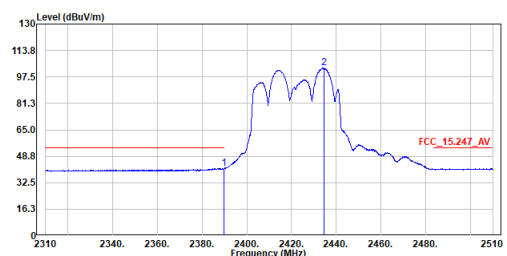


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.900	41.32	54.00	-12.68	30.91	10.41	Average
2	2434.400	102.97	-----	-----	92.45	10.52	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2422MHz
Test By :Cyril Chen

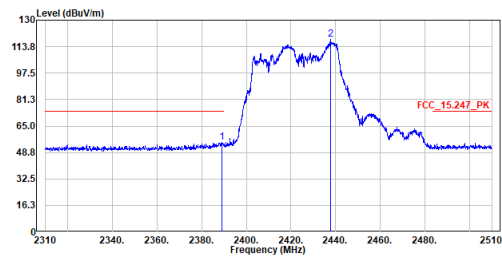


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.200	54.90	74.00	-19.10	44.50	10.40	Peak
2	2437.900	118.15	-----	-----	107.63	10.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be40_TX_2422MHz
Test By :Cyril Chen

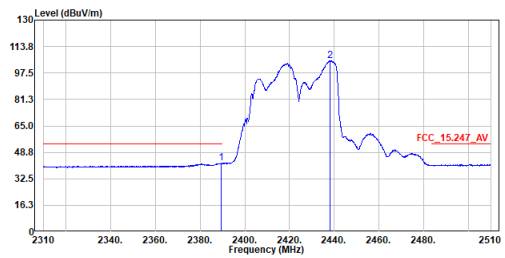


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.500	41.99	54.00	-12.01	31.58	10.41	Average
2	2438.200	104.90	-----	-----	94.38	10.52	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2422MHz
Test By :Cyril Chen

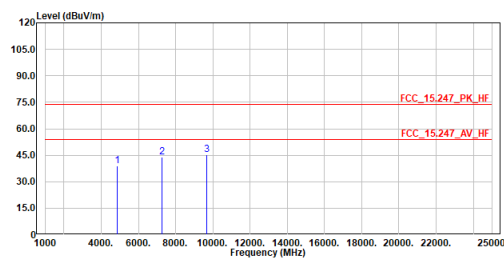


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	39.09	74.00	-34.91	56.79	-17.70	Peak
2	7266.000	44.12	74.00	-29.88	56.85	-12.73	Peak
3	9688.000	45.47	74.00	-28.53	54.52	-9.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2422MHz
Test By :Cyril Chen

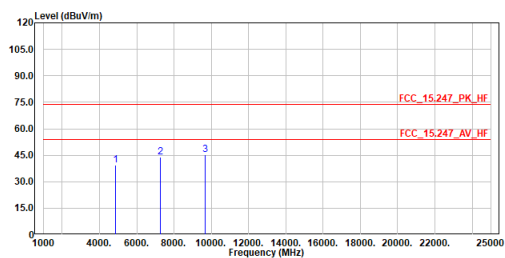


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	39.36	74.00	-34.64	57.06	-17.70	Peak
2	7266.000	44.11	74.00	-29.89	56.84	-12.73	Peak
3	9688.000	45.49	74.00	-28.51	54.54	-9.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2437MHz
Test By :Cyril Chen

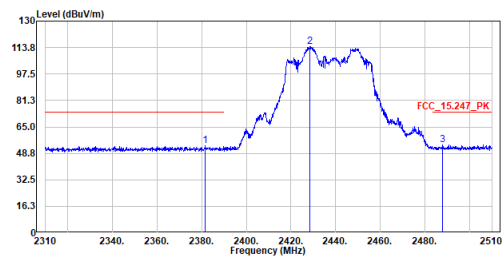


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2381.500	53.24	74.00	-20.76	42.86	10.38	Peak
2	2428.500	114.43	-----	-----	103.93	10.50	Peak
3	2488.000	53.86	74.00	-20.14	43.21	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be40_TX_2437MHz
Test By :Cyril Chen

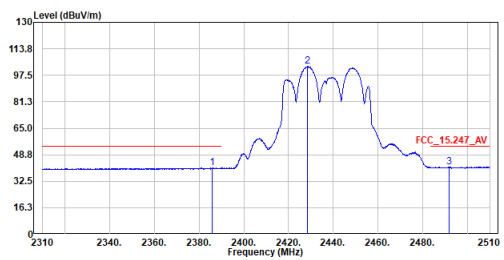


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2385.900	40.72	54.00	-13.28	30.32	10.40	Average
2	2428.500	102.93	-----	-----	92.43	10.50	Average
3	2491.900	41.22	54.00	-12.78	30.56	10.66	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2437MHz
Test By :Cyril Chen

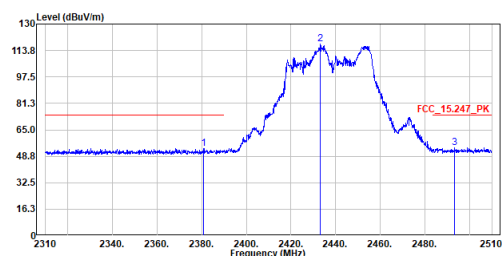


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2381.000	53.40	74.00	-20.60	43.02	10.38	Peak
2	2433.100	117.58	-----	-----	107.06	10.52	Peak
3	2493.400	53.74	74.00	-20.26	43.08	10.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be40_TX_2437MHz
Test By :Cyril Chen

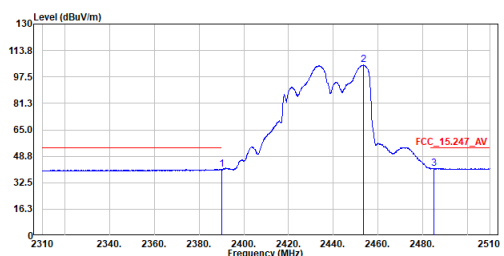


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2390.000	40.79	54.00	-13.21	30.38	10.41	Average
2	2453.400	104.83	-----	-----	94.27	10.56	Average
3	2485.100	41.44	54.00	-12.56	30.79	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2437MHz
Test By :Cyril Chen

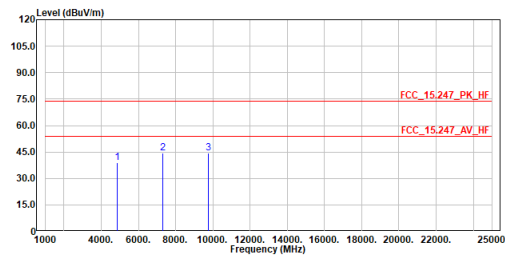


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	38.83	74.00	-35.17	56.45	-17.62	Peak
2	7311.000	44.25	74.00	-29.75	56.91	-12.66	Peak
3	9748.000	44.47	74.00	-29.53	53.45	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2437MHz
Test By :Cyril Chen

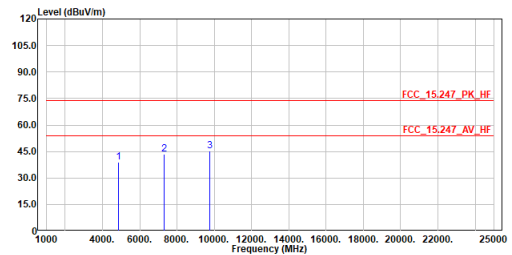


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	38.86	74.00	-35.14	56.48	-17.62	Peak
2	7311.000	43.41	74.00	-30.59	56.07	-12.66	Peak
3	9748.000	45.14	74.00	-28.86	54.12	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2452MHz
Test By :Cyril Chen

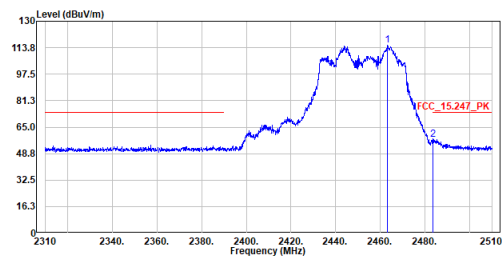


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2463.300	115.27	-----	-----	104.68	10.59	Peak
2	2483.600	57.58	74.00	-16.42	46.94	10.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be40_TX_2452MHz
Test By :Cyril Chen

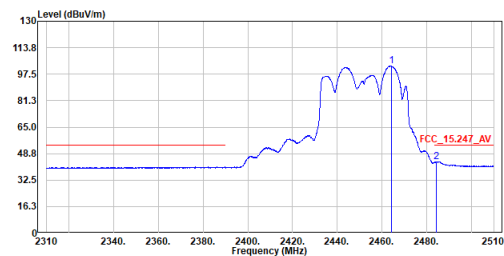


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2464.300	102.60	-----	-----	92.00	10.60	Average
2	2484.300	43.85	54.00	-10.15	33.20	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2452MHz
Test By :Cyril Chen

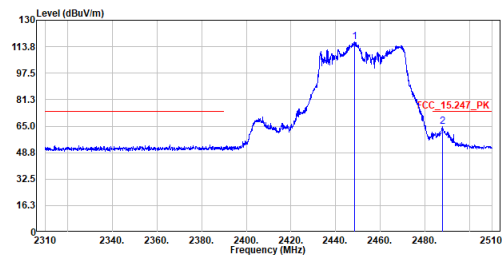


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2448.400	116.58	-----	-----	106.03	10.55	Peak
2	2487.800	64.53	74.00	-9.47	53.88	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be40_TX_2452MHz
Test By :Cyril Chen

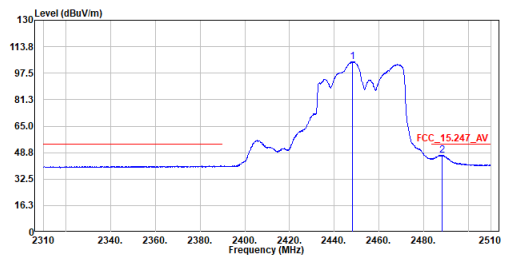


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2448.100	104.43	-----	-----	93.88	10.55	Average
2	2488.200	47.28	54.00	-6.72	36.63	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_2452MHz
Test By :Cyril Chen

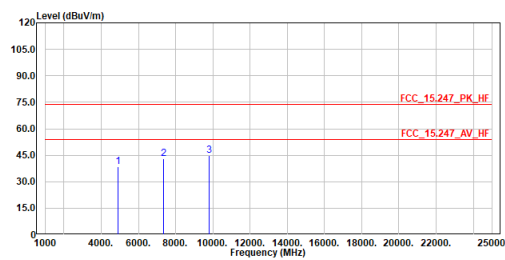


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4904.000	38.71	74.00	-35.29	56.25	-17.54	Peak
2	7356.000	43.09	74.00	-30.91	55.66	-12.57	Peak
3	9808.000	45.00	74.00	-29.00	53.90	-8.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_2452MHz
Test By :Cyril Chen

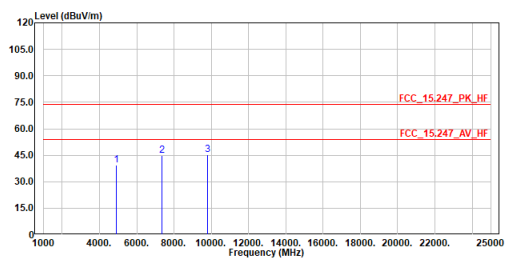


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4904.000	39.49	74.00	-34.51	57.03	-17.54	Peak
2	7356.000	44.92	74.00	-29.08	57.49	-12.57	Peak
3	9808.000	45.27	74.00	-28.73	54.17	-8.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

<4TX, Nss4, FRU mode >

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2412MHz
Test By :Ling Chen

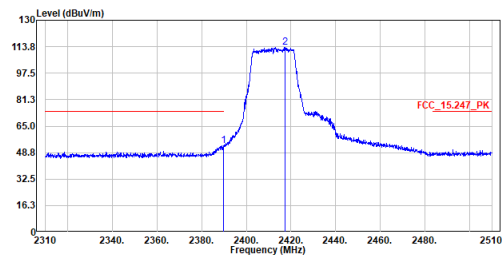


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.800	52.93	74.00	-21.07	42.52	10.41	Peak
2	2417.500	113.42	-----	-----	102.95	10.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be20_TX_2412MHz
Test By :Ling Chen

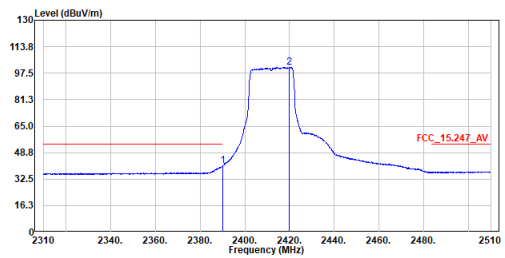


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2390.000	40.88	54.00	-13.12	30.47	10.41	Average
2	2419.800	101.21	-----	-----	90.72	10.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2412MHz
Test By :Ling Chen

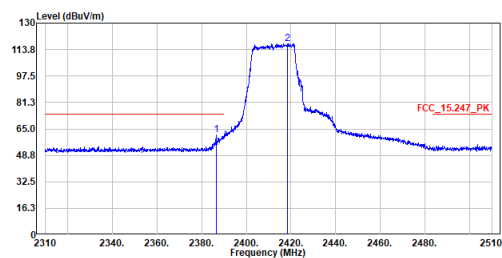


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2386.400	61.49	74.00	-12.51	51.09	10.40	Peak
2	2418.500	117.44	-----	-----	106.95	10.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be20_TX_2412MHz
Test By :Ling Chen

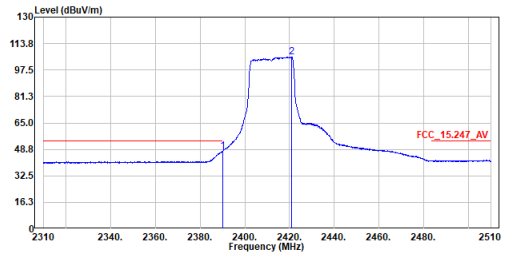


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2390.000	47.48	54.00	-6.52	37.07	10.41	Average
2	2421.000	105.30	-----	-----	94.81	10.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_2412MHz
Test By :Brook Cheng

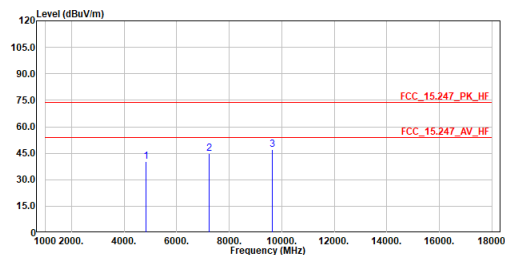


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	40.21	74.00	-33.79	57.97	-17.76	Peak
2	7236.000	44.95	74.00	-29.05	57.73	-12.78	Peak
3	9648.000	47.04	74.00	-26.96	56.13	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_2412MHz
Test By :Brook Cheng

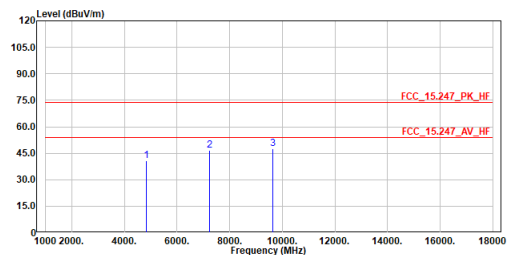


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	40.77	74.00	-33.23	58.53	-17.76	Peak
2	7236.000	46.42	74.00	-27.58	59.20	-12.78	Peak
3	9648.000	47.61	74.00	-26.39	56.70	-9.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2437MHz
Test By :Ling Chen

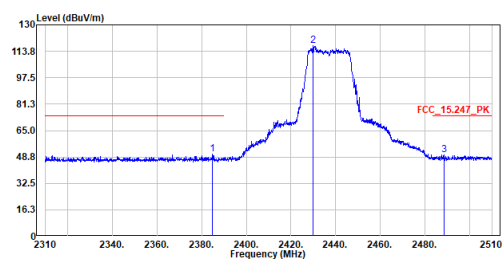


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2384.900	50.71	74.00	-23.29	40.32	10.39	Peak
2	2429.800	117.11	-----	-----	106.60	10.51	Peak
3	2488.500	50.23	74.00	-23.77	39.58	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be20_TX_2437MHz
Test By :Ling Chen

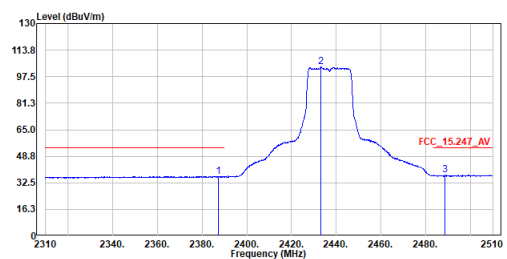


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.400	36.48	54.00	-17.52	26.08	10.40	Average
2	2433.200	103.38	-----	-----	92.86	10.52	Average
3	2488.500	37.20	54.00	-16.80	26.55	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2437MHz
Test By :Ling Chen

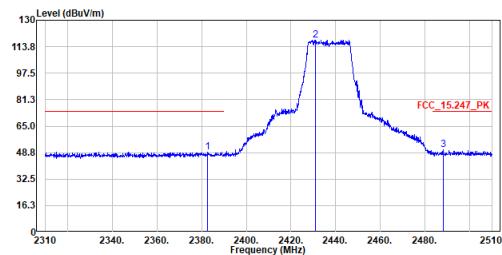


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2382.600	49.30	74.00	-24.70	38.91	10.39	Peak
2	2431.100	117.89	-----	-----	107.38	10.51	Peak
3	2488.100	50.32	74.00	-23.68	39.67	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be20_TX_2437MHz
Test By :Ling Chen

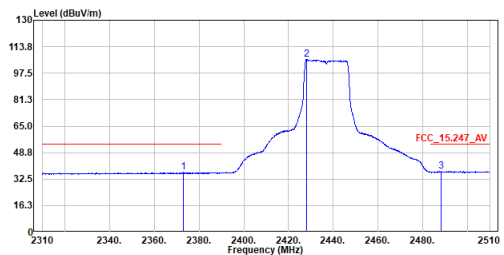


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2373.000	36.58	54.00	-17.42	26.22	10.36	Average
2	2428.000	105.98	-----	-----	95.48	10.50	Average
3	2488.300	37.24	54.00	-16.76	26.59	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_2437MHz
Test By :Brook Cheng

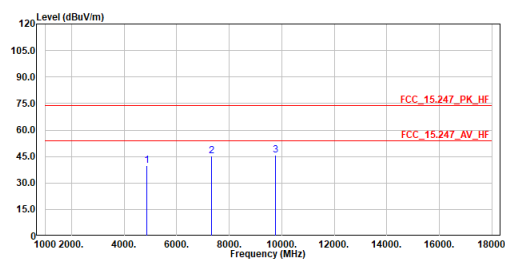


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	39.70	74.00	-34.30	57.32	-17.62	Peak
2	7311.000	45.38	74.00	-28.62	58.04	-12.66	Peak
3	9748.000	45.66	74.00	-28.34	54.64	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_2437MHz
Test By :Brook Cheng

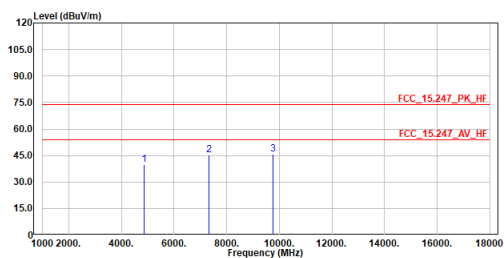


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	39.94	74.00	-34.06	57.56	-17.62	Peak
2	7311.000	45.50	74.00	-28.50	58.16	-12.66	Peak
3	9748.000	45.91	74.00	-28.09	54.89	-8.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2462MHz
Test By :Ling Chen

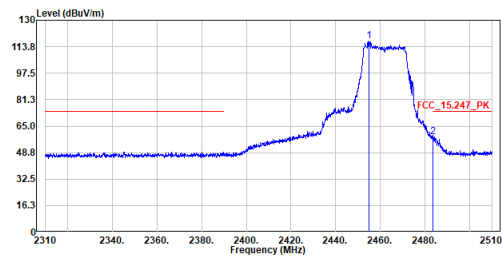


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2455.000	117.41	-----	-----	106.84	10.57	Peak
2	2483.600	58.59	74.00	-15.41	47.95	10.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be20_TX_2462MHz
Test By :Ling Chen

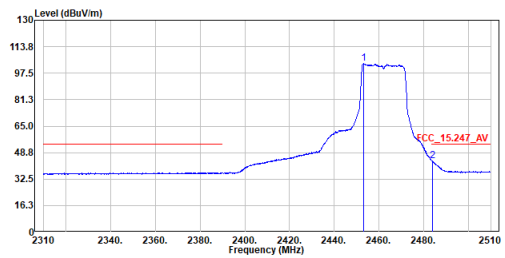


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2453.200	103.33	-----	-----	92.77	10.56	Average
2	2483.800	43.79	54.00	-10.21	33.14	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_2462MHz
Test By :Ling Chen

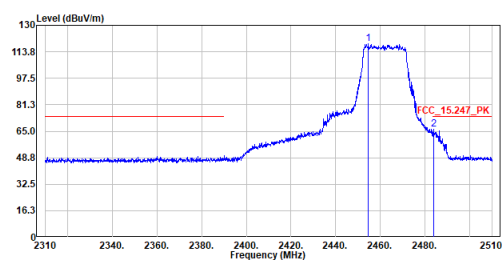


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2454.500	118.62	-----	-----	108.05	10.57	Peak
2	2483.900	66.00	74.00	-8.00	55.35	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be20_TX_2462MHz
Test By :Ling Chen

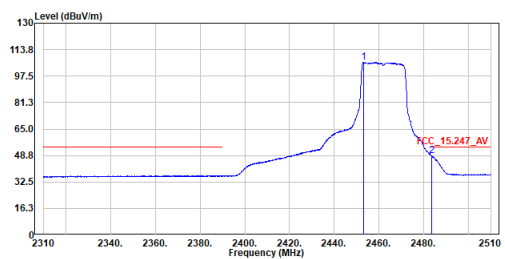


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2453.300	106.20	-----	-----	95.64	10.56	Average
2	2483.600	48.77	54.00	-5.23	38.13	10.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_2462Mhz
Test By :Brook Cheng

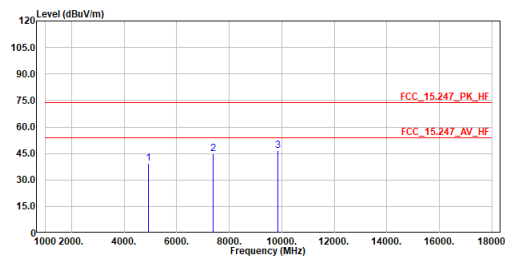


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	39.54	74.00	-34.46	57.03	-17.49	Peak
2	7386.000	45.01	74.00	-28.99	57.54	-12.53	Peak
3	9848.000	46.78	74.00	-27.22	55.63	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_2462Mhz
Test By :Brook Cheng

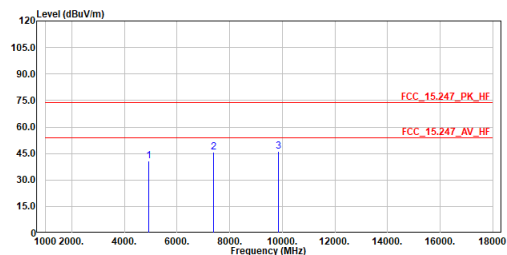


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	40.60	74.00	-33.40	58.09	-17.49	Peak
2	7386.000	45.80	74.00	-28.20	58.33	-12.53	Peak
3	9848.000	46.05	74.00	-27.95	54.90	-8.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2422Mhz
Test By :Ling Chen

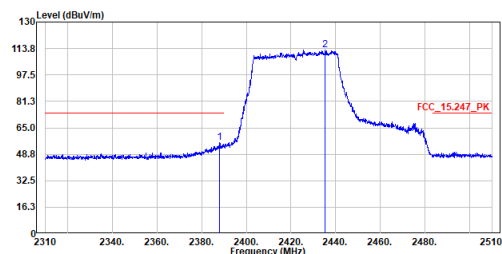


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2388.100	55.82	74.00	-18.18	45.42	10.40	Peak
2	2435.300	112.93	-----	-----	102.41	10.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be40_TX_2422Mhz
Test By :Ling Chen

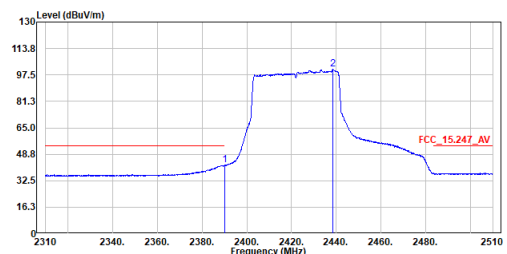


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2390.000	42.11	54.00	-11.89	31.70	10.41	Average
2	2438.600	100.92	-----	-----	90.40	10.52	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2422MHz
Test By :Ling Chen

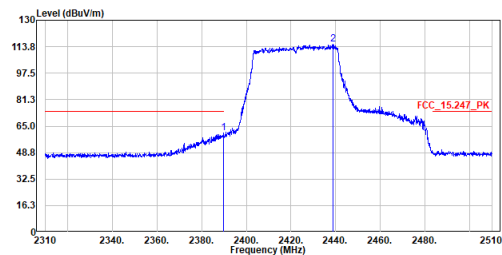


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.800	60.62	74.00	-13.38	50.21	10.41	Peak
2	2438.900	115.12	-----	-----	104.60	10.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be40_TX_2422MHz
Test By :Ling Chen

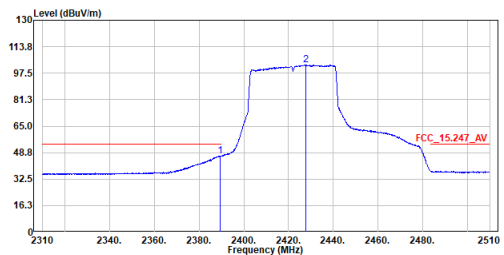


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.400	46.75	54.00	-7.25	36.34	10.41	Average
2	2427.600	102.51	-----	-----	92.01	10.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_2422MHz
Test By :Brook Cheng

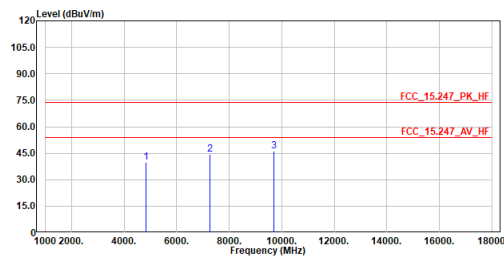


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4844.000	39.94	74.00	-34.06	57.64	-17.70	Peak
2	7266.000	44.58	74.00	-29.42	57.31	-12.73	Peak
3	9688.000	46.35	74.00	-27.65	55.40	-9.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_2422MHz
Test By :Brook Cheng

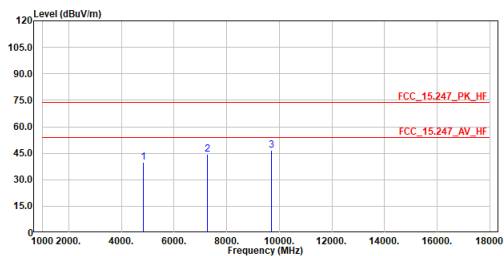


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4844.000	39.65	74.00	-34.35	57.35	-17.70	Peak
2	7266.000	44.38	74.00	-29.62	57.11	-12.73	Peak
3	9688.000	46.60	74.00	-27.40	55.65	-9.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2437MHz
Test By :Ling Chen

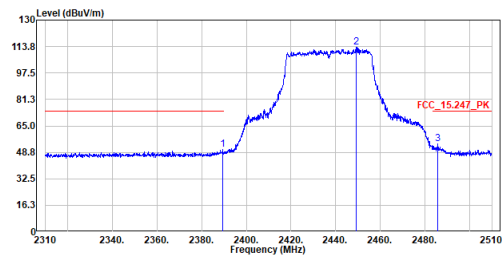


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.400	50.41	74.00	-23.59	40.00	10.41	Peak
2	2449.300	113.54	-----	-----	102.99	10.55	Peak
3	2485.700	54.11	74.00	-19.89	43.46	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :be40_TX_2437MHz
Test By :Ling Chen

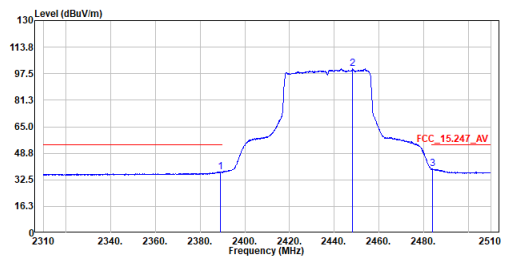


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.000	37.36	54.00	-16.64	26.96	10.40	Average
2	2448.200	100.40	-----	-----	89.85	10.55	Average
3	2483.900	39.07	54.00	-14.93	28.42	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_2437MHz
Test By :Ling Chen

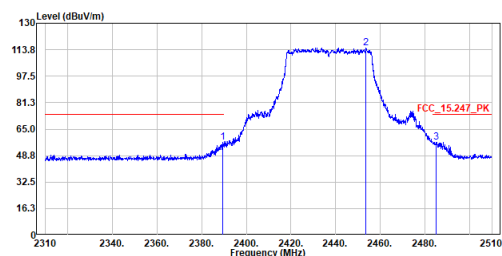


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.500	56.70	74.00	-17.30	46.29	10.41	Peak
2	2453.500	115.00	-----	-----	104.44	10.56	Peak
3	2485.100	57.12	74.00	-16.88	46.47	10.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :be40_TX_2437MHz
Test By :Ling Chen

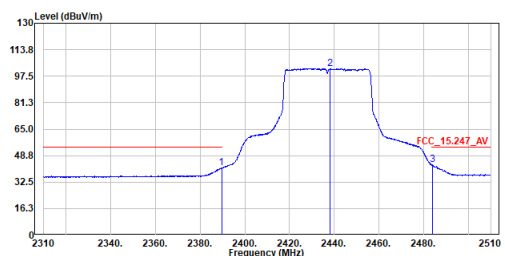

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.600	41.35	54.00	-12.65	30.94	10.41	Average
2	2438.100	102.19	-----	-----	91.67	10.52	Average
3	2483.800	42.97	54.00	-11.03	32.32	10.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.