

*User Manual*

*EXHIBIT C*

For 2/1/22

## FCC/CE Statement

### FCC Class B Radio Frequency Interference Statement

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

The USB Hub is in conformity with EUROPEAN  
STANDARD EN 55022/A1 Class B,  
and EN 50082-1(IEC 801-2, IEC 801-3, IEC 801-4).

## CE Declaration of conformity

Notice 2:  
Shielded interface cables, if any, must be used in order to  
comply with emission limits.

Notice 1:  
The changes or modifications not expressly approved by  
the party responsible for compliance could void the users  
authority to operate the equipment.

4. Consult the dealer or an experienced radio / television  
technician for help.


# Table of Contents

|                                  |  |
|----------------------------------|--|
| <b>1. Installation</b>           |  |
| 1-1 Identification of Features   |  |
| 1-2 Location                     |  |
| 1-3 Power Connection             |  |
| <b>2. Connecting the USB Hub</b> |  |
| 2-1 Connecting to your Computer  |  |
| 2-2 Connecting the USB cable     |  |
| <b>3. Initial Connection</b>     |  |
| <b>4. Trouble Shooting</b>       |  |
| <b>5. About this Product</b>     |  |
| 5-1 Do's and Don'ts for Usage    |  |
| 5-2 Warranty                     |  |
| 5-3 Features                     |  |
| 5-4 Specifications               |  |

# 1 Installation

## 1-1 Identification of Features

■ Top Side

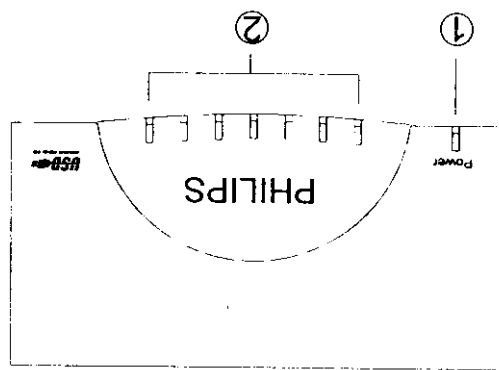


|             |                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------|
| ① Power LED | Red light is lit when power is supplied to the unit                                           |
| ② LED 1~7   | Green light is lit or blinking for each of the seven ports when they are connected and active |

- Up Stream means to the PC and Down Stream means to the USB device.
- USB device means, a device that conforms to USB specifications.


Please note :

|                  |                                                    |
|------------------|----------------------------------------------------|
| ② Up Stream Port | USB B-type connector port for connection to the PC |
| ③ Power Socket   | For the AC Adapter connection                      |

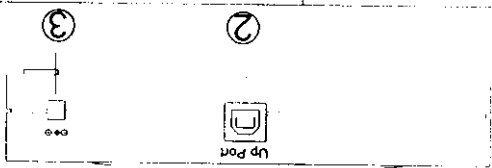

■ Rear of the Unit


- ① Down Stream Ports  
Seven, USB A-type connector ports connect to USB devices

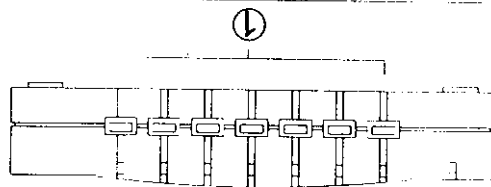

■ Front of the Unit

## 1-2 Location

The best location for the placement of this unit is between the USB devices to be connected, and close enough to the PC to allow the supplied cable to reach the PC.

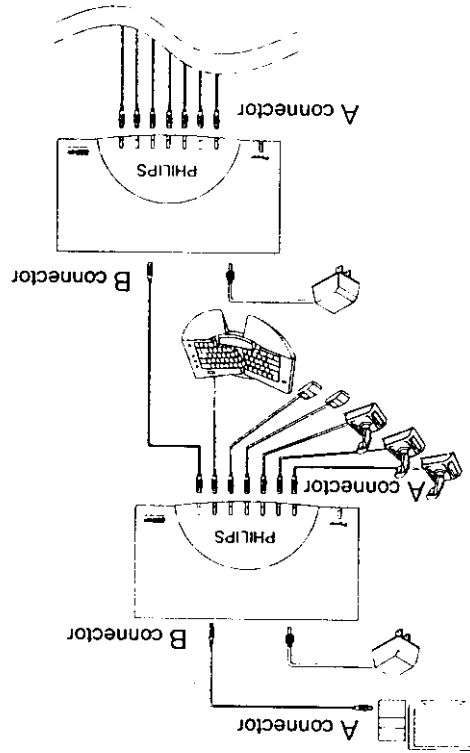


## Important

Do not place the unit in any of the following locations:

- ☐ High temperature or high humidity location.
- ☐ A location that has a strong magnetic field.
- ☐ A location with excessive dust.
- ☐ A location that has excessive extremes in temperature.
- ☐ A location that is in direct sunlight for long periods of time.
- ☐ A location that would cause the unit to be hit or fall.
- ☐ A location that does not allow the unit to sit firmly and balanced on an even surface.
- ☐ A location that is in or near water or any type of moisture.

To: Apollo.  
 From: Candy 1/21

### 1-3 Power Connection




- The unit can operate either with or without the included AC adapter. When used in Bus-Powered mode, without the AC adapter, the Hub will supply each device attached to it a maximum of DC +5V, 100mA power. This should be sufficient for most mice, joystick, gamepad, keyboard and other low-power devices. In Self-Powered Mode, using the AC Adapter, the unit provides a maximum DC +5V, 500mA to each downstream port, allowing for connection to other hubs or power-hungry devices like a digital camera or scanner.
- ☐ Locate the unit close enough to an electrical outlet so that the AC adapter cable will reach the outlet without putting a strain on the cable, causing the adapter jack to be pulled out of the unit.
  - ☐ It is recommended that the AC adapter be plugged into the electrical outlet first, and then plugged into the unit.
  - ☐ It is recommended that the AC adapter be used. Whenever more than one hub is used in a stacking configuration.
  - ☐ Do not remove the AC adapter when the unit is working.

(Per the USB specification in the bus-powered mode, only four downstream ports (1-4) are operational)

## 2 Connecting the USB Hub

### 2-1 Connecting to your computer


This unit can be connected or disconnected to your PC when the computer is on and running programs, using any USB port on your computer. This product allows your computer to interface with various USB devices. See figure below.

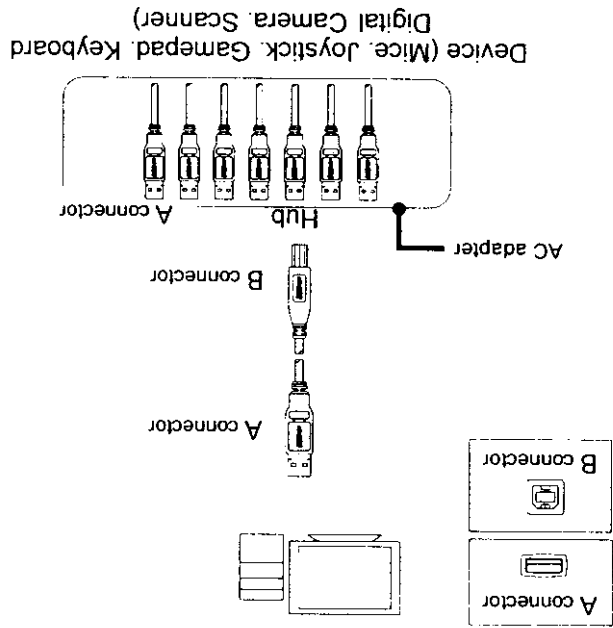

## 2-2 Connecting the USB cable


### A type connector

Insert the USB cable into the down stream port of the PC. Make sure that it goes all the way into the socket and is firmly connected.

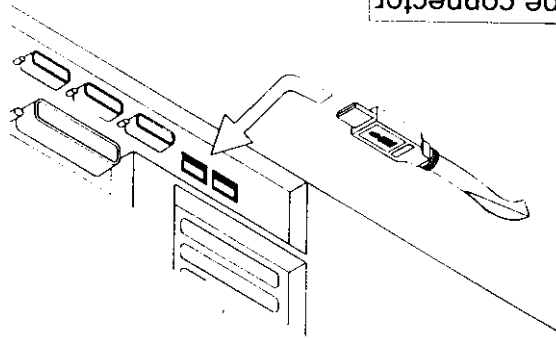



### B type connector

Insert the USB cable into the up stream port of this product. Make sure that it goes all the way into the socket and is firmly connected.

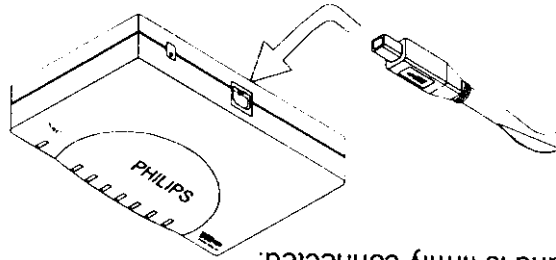

### 3 Initial Connection

- ☐ When connecting this unit for the first time a message box will display "Searching for unknown hardware device, searching software for installation".
- ☐ Your computer will then start up the Device Driver Wizard, and will install the unit. This product is recognized as "generic USB Hub".
- ☐ Once your computer has confirmed installation, you can then connect any USB device you wish to the Hub.
- ☐ Please note that your particular software may have slightly different versions of installation software and the message used in installing may differ.



## 4 Trouble Shooting

If you encounter problems in using this product, please refer to the following list of common problems encountered and possible causes. If you cannot solve the problem or it does not appear in the list below, please contact the place of purchase for repair or replacement.

| Trouble                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                  | Possible Cause                                                                                                                                     |                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Computer cannot recognize this product.</li> <li>• Display has a "i" mark to the left side of the "Common USB Hub" in the device manager message box.</li> <li>• Something other than "Common USB Hub" is displayed in the device manager box.</li> </ul> | <ul style="list-style-type: none"> <li>• The AC adapter is not properly connected to the unit or to the outlet.</li> <li>• The outlet has no power, or is turned off.</li> </ul> | <ul style="list-style-type: none"> <li>• The connection is not firmly in place.</li> <li>• The downstream USB device is malfunctioning.</li> </ul> | <ul style="list-style-type: none"> <li>• A particular USB device does not support multiple devices. Please consult the operating manual for that particular USB device.</li> </ul>         |
|                                                                                                                                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>• Red Power Led is not lit on the unit.</li> </ul>                                                                                        | <ul style="list-style-type: none"> <li>• Green LED light is not lit when port is connected to device.</li> </ul>                                   | <ul style="list-style-type: none"> <li>• Downstream USB device does not function properly.</li> <li>• When multiple downstream USB devices are connected, a malfunction occurs.</li> </ul> |

## 5 About this product

This product conforms to USB Specification Rev. 1.0 and HID class definition Rev. 1.0. It requires at least Windows 95 OS R2.1 or Windows 98 to operate and your computer must have a USB port. The Hub topology supports up to 127 physical devices in a tiered-star configuration, with each device having a maximum of 16 end points.

### 5-1 Do's and Don'ts for Usage

- Here is a short summary of items to pay attention to when using this product :
- ☐ It is normal for some heat build-up to occur when this product is in use and it may feel warm to the touch.
  - ☐ Do not open the case. Doing so will void the warranty.
  - ☐ Only use the AC adapter supplied with the unit.
  - ☐ If the unit starts emitting unusual smells, sounds or you observe smoke, unplugging the unit immediately from its power supply. Do not continue to use the unit, and contact the place you purchased the unit.
  - ☐ When disconnecting any cable from the unit, please grasp from the plug and do not pull using the cord section, as this may cause damage.

- ☐ It is recommend that you disconnect the power supply if the unit is not going to be used for a long period of time.
- ☐ Do not leave the unit in a location exposed to high humidity, high temperatures, direct sunlight, excessive dust, or excessive moisture.
- ☐ Do not touch the unit or cable with a wet hand, as electric shock is possible. Should the unit become wet, unplug it from it's power source before handling.
- ☐ Any modifications done to modify this unit by anyone other than authorized personnel will void the warranty, and any damage, electric shock, fire, or loss of function resulting from unauthorized modifications will not be the responsibility of the manufacturer.
- ☐ Back-up software data regularly. Any error or loss of data is not guaranteed when using this product.
- ☐ Carefully read this manual before you use this product.

## 5-2 Warranty

- ☐ This product is guaranteed for a period of one year after the date of purchase to be free of manufacture defects and to operate properly. During the one year period, should a problem occur, please return the unit, along with your warranty card to the place of purchase, and we will replace the defective unit.
- ☐ Please fill out your warranty card immediately, and register your unit in order to be covered under the warranty.

### 5-3 Features

- ☐ This product is plug and play compatible.
- ☐ A maximum of 127 devices can be supported.
- ☐ This unit can be self-powered by using the AC Adapter supplied or Bus powered.
- ☐ All 7 downstream ports are supported with over current capacity.
- ☐ Both low speed and high speed devices are supported.
- ☐ LED displays indicate power on and connections to each port.
- ☐ A maximum 5m connection cable can be used between two hubs.
- ☐ This product conforms to USB Specification Revision 1.0 and HID Class Definition Rev.1.0.

## Hardware Specifications

|                             |                                                                        |
|-----------------------------|------------------------------------------------------------------------|
| Specification               | USB Specification Rev. 1.0 and HID class definition Rev. 1.0           |
| Topology Transmission Speed | Star Type 12Mbps                                                       |
| Transmission Media          | USB Cable                                                              |
| Interface                   | Up stream port (type B) : 1 port<br>Down stream port (type A) : 7 port |
| Power                       | PC supply<br>AC adapter                                                |
| Operating Temperature       | 0°C ~ 70°C                                                             |
| Operating Humidity          | 5%~90%                                                                 |
| Storage Temperature         | -40°C ~ 70°C                                                           |
| Dimension                   | (W)170mm X (H)30mm X (D)85.5mm                                         |
| Weight                      | 205g                                                                   |

## Array and Circuit of USB port-pin

|   |        |
|---|--------|
| 1 | +5V    |
| 2 | DATA   |
| 3 | -DATA+ |
| 4 | GROUND |

USER INFORMATION

USER INFORMATION

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device. Pursuant to Part 15 of the FCC Rules, these limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on the user is encouraged to try to correct the interference by one or more of the following measures:

--Reorient or relocate the receiving antenna.

--Increase the separation between the equipment and receiver.

--Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

--Consult the dealer or an experienced radio/TV technician for help.

This booklet is available from the US Government Printing Office \*Washington, DC 20402, Stock NO. 004-000-00345-4.

CAUTION: Any changes of modifications not expressly approved by the grantee of this device could void the users authority to operate the equipment.