

FCC RADIO TEST REPORT

FCC ID: 2A6N3-MAXCONNECT

Product: Conferencing room equipment
Trade Mark: **biamp.**
Model No.: Max Connect
Family Model: Modena Max Connect
Report No.: S23031702610003
Issue Date: Jul 20, 2023

Prepared for

Biamp Systems, LLC
9300 SW Gemini Drive Beaverton, OR 97008,USA

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang
Street Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
3	FACILITIES AND ACCREDITATIONS	6
3.1	FACILITIES.....	6
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	6
3.3	MEASUREMENT UNCERTAINTY	6
4	GENERAL DESCRIPTION OF EUT	7
5	DESCRIPTION OF TEST MODES	9
6	SETUP OF EQUIPMENT UNDER TEST	11
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	11
6.2	SUPPORT EQUIPMENT.....	12
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	13
7	TEST REQUIREMENTS.....	15
7.1	CONDUCTED EMISSIONS TEST	15
7.1.1	<i>Applicable Standard</i>	15
7.1.2	<i>Conformance Limit</i>	15
7.1.3	<i>Measuring Instruments</i>	15
7.1.4	<i>Test Configuration</i>	15
7.1.5	<i>Test Procedure</i>	15
7.1.6	<i>Test Results</i>	16
7.2	RADIATED SPURIOUS EMISSION	18
7.2.1	<i>Applicable Standard</i>	18
7.2.2	<i>Conformance Limit</i>	18
7.2.3	<i>Measuring Instruments</i>	19
7.2.4	<i>Test Configuration</i>	19
7.2.5	<i>Test Procedure</i>	20
7.2.6	<i>Test Results</i>	21
7.3	6DB BANDWIDTH.....	28
7.3.1	<i>Applicable Standard</i>	28
7.3.2	<i>Conformance Limit</i>	28
7.3.3	<i>Measuring Instruments</i>	28
7.3.4	<i>Test Setup</i>	28
7.3.5	<i>Test Procedure</i>	28
7.3.6	<i>Test Results</i>	29
7.4	MAXIMUM OUTPUT POWER.....	30
7.4.1	<i>Applicable Standard</i>	30
7.4.2	<i>Conformance Limit</i>	30
7.4.3	<i>Measuring Instruments</i>	30
7.4.4	<i>Test Setup</i>	30
7.4.5	<i>Test Procedure</i>	30
7.4.6	<i>EUT operation during Test</i>	30
7.4.7	<i>Test Results</i>	31
7.5	POWER SPECTRAL DENSITY	32
7.5.1	<i>Applicable Standard</i>	32
7.5.2	<i>Conformance Limit</i>	32
7.5.3	<i>Measuring Instruments</i>	32
7.5.4	<i>Test Setup</i>	32
7.5.5	<i>Test Procedure</i>	32
7.5.6	<i>Test Results</i>	33
7.6	CONDUCTED BAND EDGE MEASUREMENT.....	34

7.6.1	<i>Applicable Standard</i>	34
7.6.2	<i>Conformance Limit</i>	34
7.6.3	<i>Measuring Instruments</i>	34
7.6.4	<i>Test Setup</i>	34
7.6.5	<i>Test Procedure</i>	34
7.6.6	<i>Test Results</i>	35
7.7	SPURIOUS RF CONDUCTED EMISSIONS	36
7.7.1	<i>Conformance Limit</i>	36
7.7.2	<i>Measuring Instruments</i>	36
7.7.3	<i>Test Setup</i>	36
7.7.4	<i>Test Procedure</i>	36
7.7.5	<i>Test Results</i>	36
7.8	ANTENNA APPLICATION	37
7.8.1	<i>Antenna Requirement</i>	37
7.8.2	<i>Result</i>	37
8	TEST RESULTS	38
8.1	2.4G WIFI	38
8.1.1	<i>Maximum Conducted Output Power</i>	38
8.1.2	<i>-6dB Bandwidth</i>	39
8.1.3	<i>Occupied Channel Bandwidth</i>	52
8.1.4	<i>Maximum Power Spectral Density Level</i>	65
8.1.5	<i>Band Edge</i>	78
8.1.6	<i>Conducted RF Spurious Emission</i>	95
8.2	2.4G WIFI MIMO	120
8.2.1	<i>Maximum Conducted Output Power</i>	120
8.2.2	<i>Maximum Power Spectral Density Level</i>	121

1 TEST RESULT CERTIFICATION

Applicant's name	Biamp Systems, LLC
Address	9300 SW Gemini Drive Beaverton, OR 97008,USA
Manufacturer's Name	Biamp Systems, LLC
Address	9300 SW Gemini Drive Beaverton, OR 97008,USA
Product description	
Product name	Conferencing room equipment
Trade Mark	biamp.
Model and/or type reference	Max Connect
Family Model	Modena Max Connect
Test Sample number	S230317026004

Measurement Procedure Used:


APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C FCC KDB 662911 D01 Multiple Transmitter Output v02r01 ANSI C63.10-2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : Mar 17, 2023 ~ Jul 18, 2023

Testing Engineer : 
(Mukzi Lee)

Authorized Signatory : 
(Alex Li)

2 SUMMARY OF TEST RESULTS**FCC Part15 (15.247), Subpart C**

Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Maximum Output Power	PASS	
15.209 (a) 15.205 (a)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.247 (d)	Band Edge Emission	PASS	
15.247 (d)	Spurious RF Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126
P.R. China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR
Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier: CN0074

FCC- Accredited : Test Firm Registration Number: 463705.

A2LA-Lab. : Designation Number: CN1184

The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized
International Standard ISO/IEC 17025:2005 General requirements for
the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined
scope and the operation of a laboratory quality management system
(refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard
uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(>6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$
9	All emissions, radiated(9KHz~30MHz)	$\pm 6\text{dB}$

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Conferencing room equipment
Trade Mark	biamp.
FCC ID	2A6N3-MAXCONNECT
Model No.	Max Connect
Family Model	Modena Max Connect
Model Difference	All the model are the same circuit and RF module, except the software and silkscreen on chassis and label.
Operating Frequency	2412-2462MHz for 802.11b/g/11n(HT20)/ax20;
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM for 802.11g/n/ax;
Number of Channels	11 channels for 802.11b/g/11n(HT20)/ax20;
Antenna Type	Antenna 1: FPCB Antenna Antenna 2: FPCB Antenna
Antenna Gain	Antenna 1: 3.91dBi; Antenna 2: 3.41dBi
Smart system	☒ SISO for 802.11b/g/ n20 /ax20 ☒ MIMO for 802.11n20 /ax20
Adapter	Model: HNMD120200X2 Input: 100-240V~50/60Hz 0.6A MAX Output: 12.0V---2.0A 24.0W
Battery	N/A
Power supply	DC 12V from adapter
HW Version	DM16N_V1.2
SW Version	Android 12

Note: 1. Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Revision History

Report No.	Version	Description	Issued Date
S23031702610003	Rev.01	Initial issue of report	Jul 20, 2023

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n/ax (HT20): MCS0 were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for 802.11b/g/n/ax (HT20):

Channel	Frequency(MHz)
1	2412
2	2417
...	...
5	2432
6	2437
...	...
10	2457
11	2462

Note: $f_c = 2412\text{MHz} + (k-1) \times 5\text{MHz}$ $k=1$ to 11

The module for 2.4G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Table for Filed Antenna

Antenna	Antenna Type	Gain (dBi)
1(main)	FPCB Antenna	3.91
2(aux)	FPCB Antenna	3.41

Mode	Tx/Rx
802.11b/g	1Tx, 1Rx
802.11n/ax	1Tx, 1Rx , 2Tx, 2Rx

The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode(duty cycle =100% during the test)


Test Mode:

Test Items	Mode	Data Rate	Channel	Ant
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20/ax20	MCS0	1/6/11	1
				1
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20/ax20	MCS0	1/6/11	1
				1
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20/ax20	MCS0	1/6/11	1
				1
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20/ax20	MCS0	1/6/11	1
				1
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20/ax20	MCS0	1/6/11	1
				1


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

For AC Conducted Emission Mode

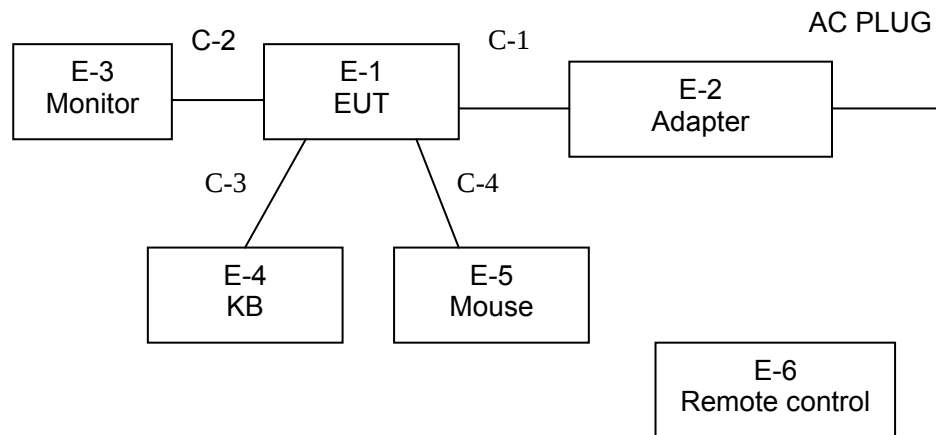

For Radiated Test Cases



For Conducted Test Cases



Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Conferencing room equipment	Max Connect	N/A	EUT
E-2	Adapter	HNMD120200X2	N/A	Peripherals
E-3	Monitor	N/A	N/A	Peripherals
E-4	KB	N/A	N/A	Peripherals
E-5	Mouse	N/A	N/A	Peripherals
E-6	Remote control	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	Power Cable	YES	YES	1.0m
C-2	HDMI Cable	YES	YES	1.7m
C-3	KB Cable	NO	NO	1.0m
C-4	Mouse Cable	NO	NO	1.0m
C-5	RF Cable	YES	NO	0.1m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) During the battery power test, the battery is fully charged.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2022.04.01 2023.03.27	2023.03.31 2024.03.26	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2022.06.16 2023.05.29	2023.06.15 2024.05.28	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2022.06.16 2023.05.29	2023.06.15 2024.05.28	1 year
4	Test Receiver	R&S	ESPI7	101318	2022.04.01 2023.03.27	2023.03.31 2024.03.26	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2023.03.16	2024.03.16	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
7	Horn Antenna	SCHWARZBECK	BBHA 9120 D	2816	2023.01.12	2024.01.11	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2022.11.07	2023.11.06	1 year
9	Amplifier	EMC	EMC051835 SE	980246	2022.06.17 2023.05.29	2023.06.16 2024.05.28	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519 B	055	2022.11.04	2023.11.03	1 year
11	Power Meter	DARE	RPR3006W	15I00041SN O84	2022.06.16 2023.05.29	2023.06.15 2024.05.28	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
15	Filter	TRILTHIC	2400MHz	29	2020.04.07 2023.03.26	2023.04.06 2026.03.25	1 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2022.04.06 2023.03.27	2023.04.05 2024.03.26	1 year
2	LISN	R&S	ENV216	101313	2022.04.06 2023.03.27	2023.04.05 2024.03.26	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2022.04.06 2023.03.27	2023.04.05 2024.03.26	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a)

7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

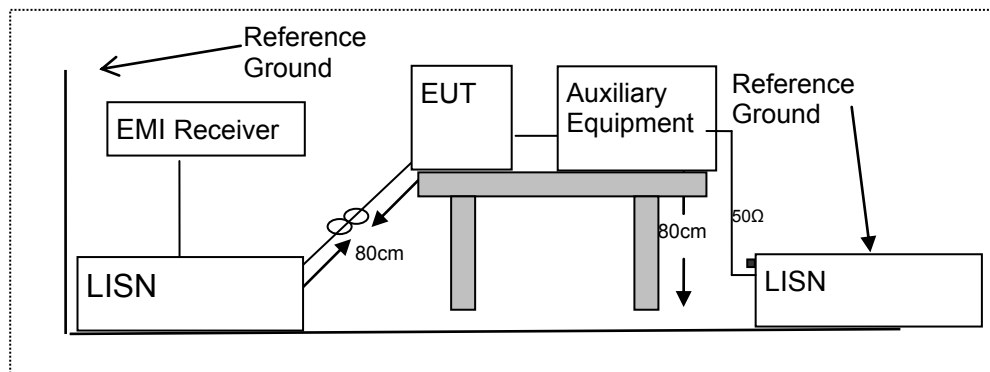

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


7.1.6 Test Results

EUT:	Conferencing room equipment	Model Name :	Max Connect
Temperature:	24 °C	Relative Humidity:	48%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	Normal Link

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1737	42.42	9.63	52.05	64.78	-12.73	QP
0.1737	7.62	9.63	17.25	54.78	-37.53	AVG
0.2020	38.59	9.63	48.22	63.52	-15.30	QP
0.2020	5.79	9.63	15.42	53.52	-38.10	AVG
0.2898	36.80	9.64	46.44	60.53	-14.09	QP
0.2898	8.23	9.64	17.87	50.53	-32.66	AVG
0.4380	34.72	9.65	44.37	57.10	-12.73	QP
0.4380	7.08	9.65	16.73	47.10	-30.37	AVG
0.5936	31.52	9.65	41.17	56.00	-14.83	QP
0.5936	23.92	9.65	33.57	46.00	-12.43	AVG
0.7056	30.63	9.65	40.28	56.00	-15.72	QP
0.7056	18.85	9.65	28.50	46.00	-17.50	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

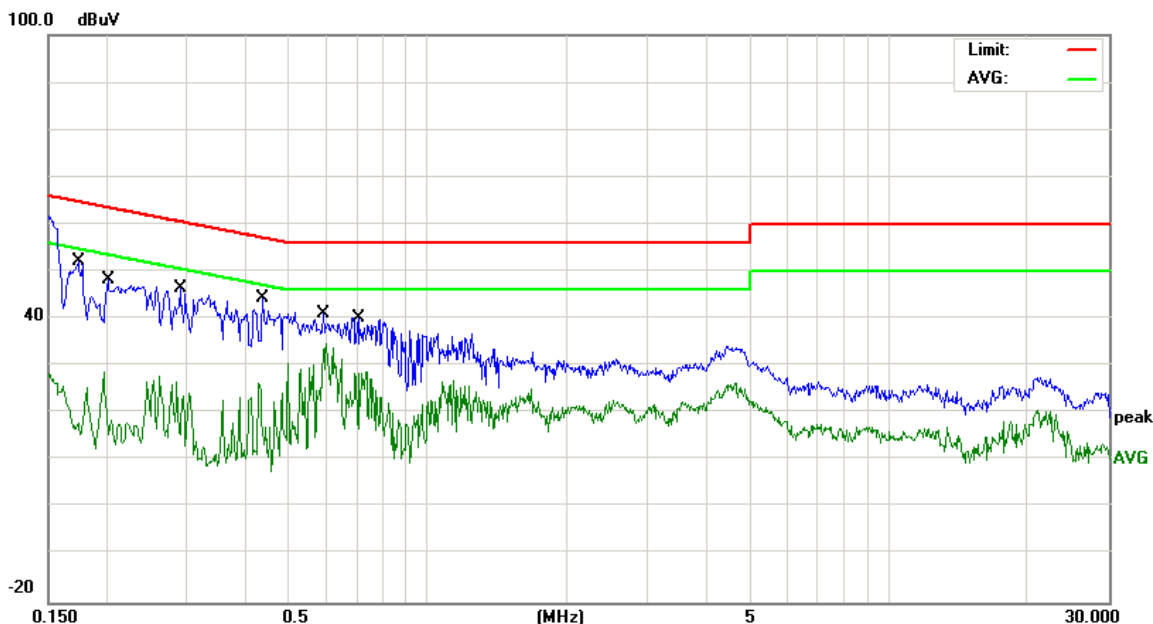


EUT:	Conferencing room equipment	Model Name :	Max Connect
Temperature:	24 °C	Relative Humidity:	48%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 12V from Adapter AC 120V/60Hz	Test Mode:	Normal Link

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1700	46.78	9.63	56.41	64.96	-8.55	QP
0.1700	13.44	9.63	23.07	54.96	-31.89	AVG
0.4178	33.08	9.65	42.73	57.49	-14.76	QP
0.4178	3.50	9.65	13.15	47.49	-34.34	AVG
0.4540	35.59	9.65	45.24	56.80	-11.56	QP
0.4540	5.98	9.65	15.63	46.80	-31.17	AVG
0.5100	33.69	9.65	43.34	56.00	-12.66	QP
0.5100	4.24	9.65	13.89	46.00	-32.11	AVG
0.6219	33.74	9.65	43.39	56.00	-12.61	QP
0.6219	24.62	9.65	34.27	46.00	-11.73	AVG
1.4014	32.12	9.66	41.78	56.00	-14.22	QP
1.4014	21.90	9.66	31.56	46.00	-14.44	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

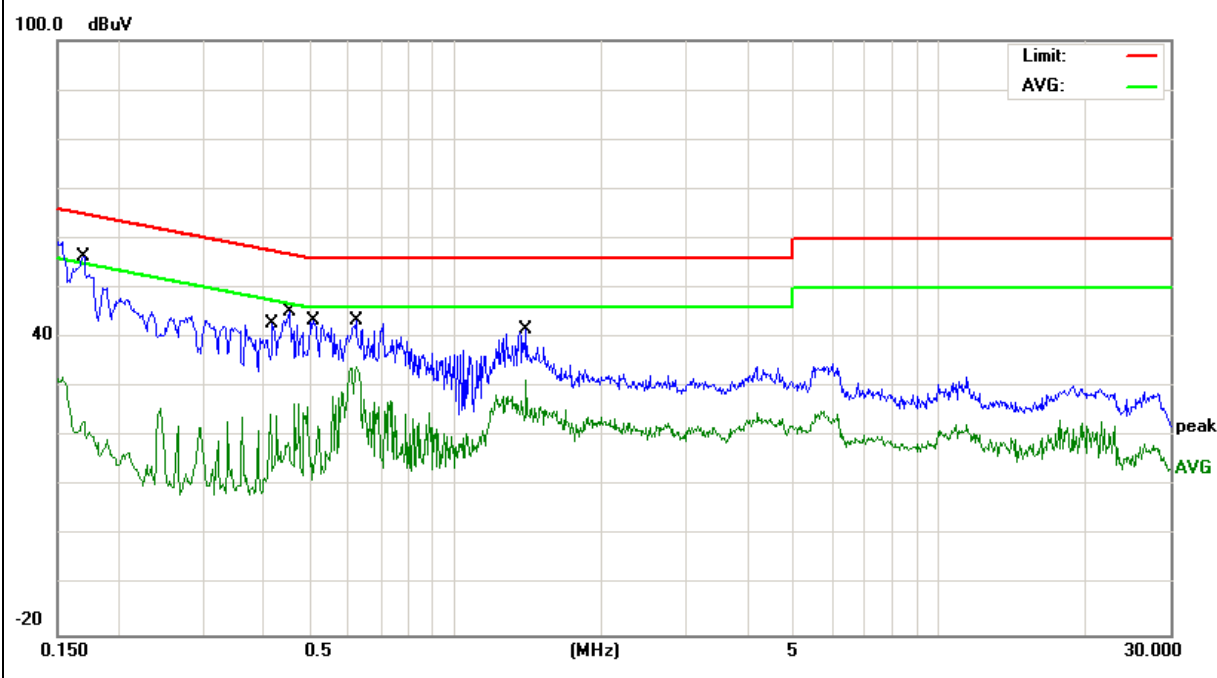

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


Remark : 1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. For Frequency 9kHz~30MHz:
Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.
For Frequency above 30MHz:
Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

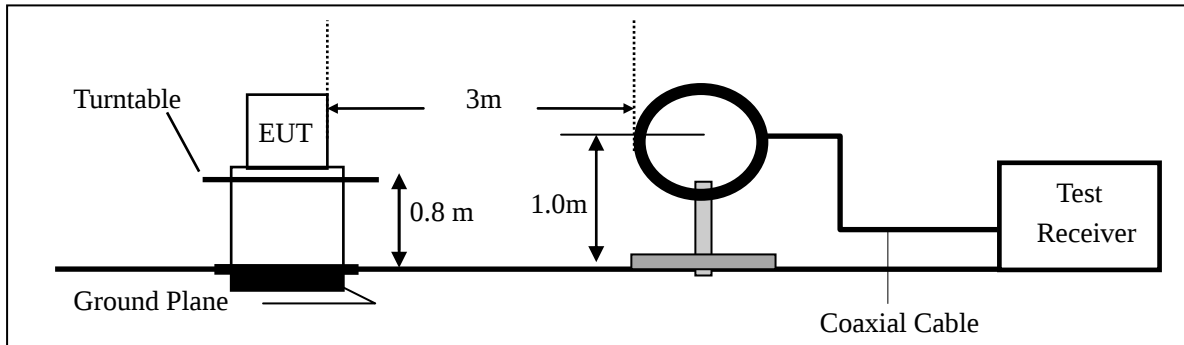

(b) For radiated emissions from 30MHz to 1000MHz

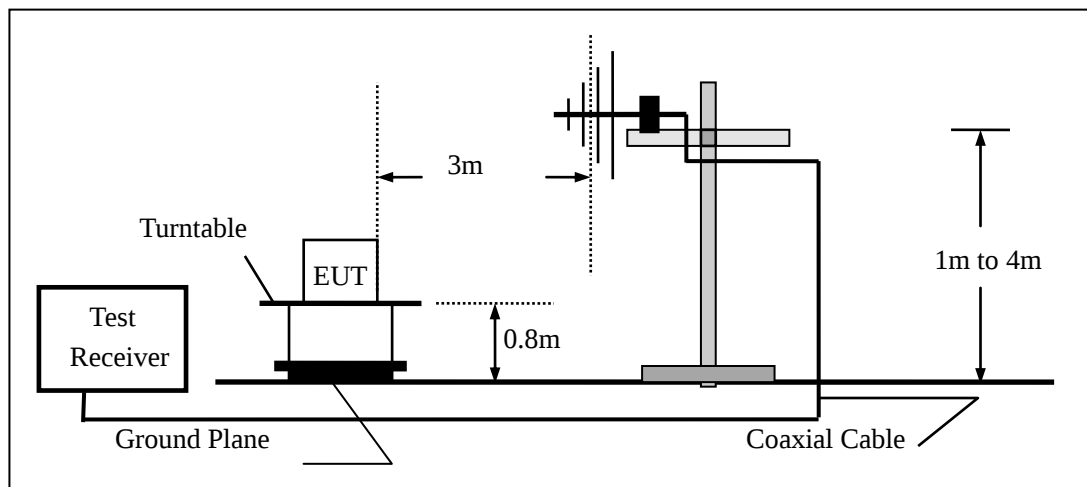

(c) For radiated emissions above 1000MHz

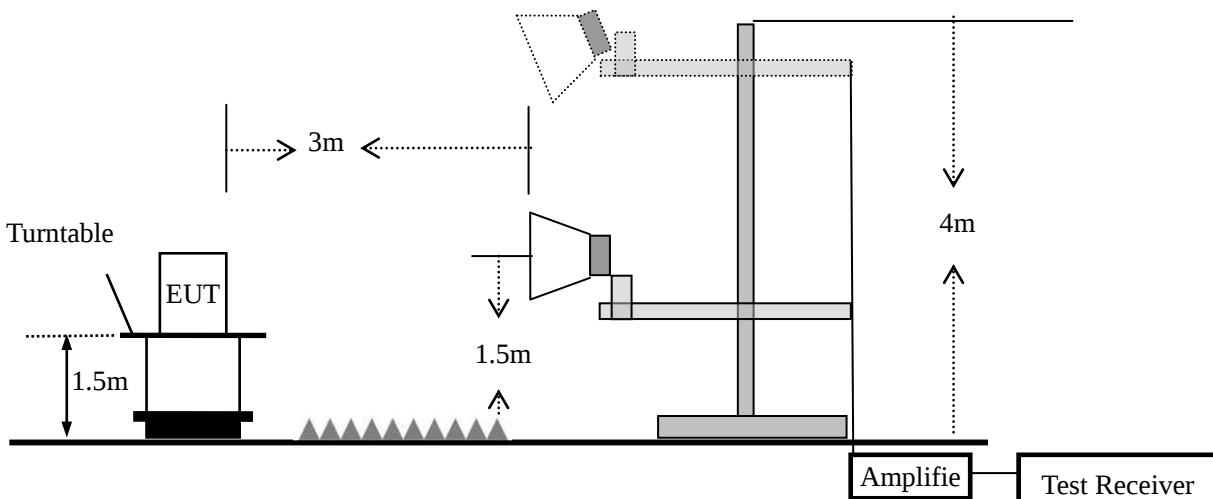

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and frequencies above 1GHz,
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

For peak measurement:

Set RBW=100 kHz for $f < 1$ GHz; VBW=120KHz; Sweep = auto; Detector function = peak; Trace = max hold; Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz

For average measurement:

VBW = 10 Hz, when duty cycle is no less than 98 percent.

VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	Conferencing equipment	room	Model Name :	Max Connect
Temperature:	26 °C		Relative Humidity:	54%
Test Mode:	Mode2/Mode3/Mode4/Mode5		Test By:	Mukzi Lee

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Spurious Emission below 1GHz (30MHz to 1GHz)


All the modulation modes have been tested, and the worst result was report as below:

EUT:	Conferencing room equipment	Model Name :	Max Connect
Temperature:	22 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Mode:	802.11b CH06
Test Voltage :	DC 12V		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	32.2924	4.50	25.20	29.70	40.00	-10.30	QP
V	129.9225	11.89	18.87	30.76	43.50	-12.74	QP
V	385.2805	6.80	22.91	29.71	46.00	-16.29	QP
V	475.4990	6.22	24.54	30.76	46.00	-15.24	QP
V	694.4174	6.30	27.86	34.16	46.00	-11.84	QP
V	890.7278	6.40	30.69	37.09	46.00	-8.91	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

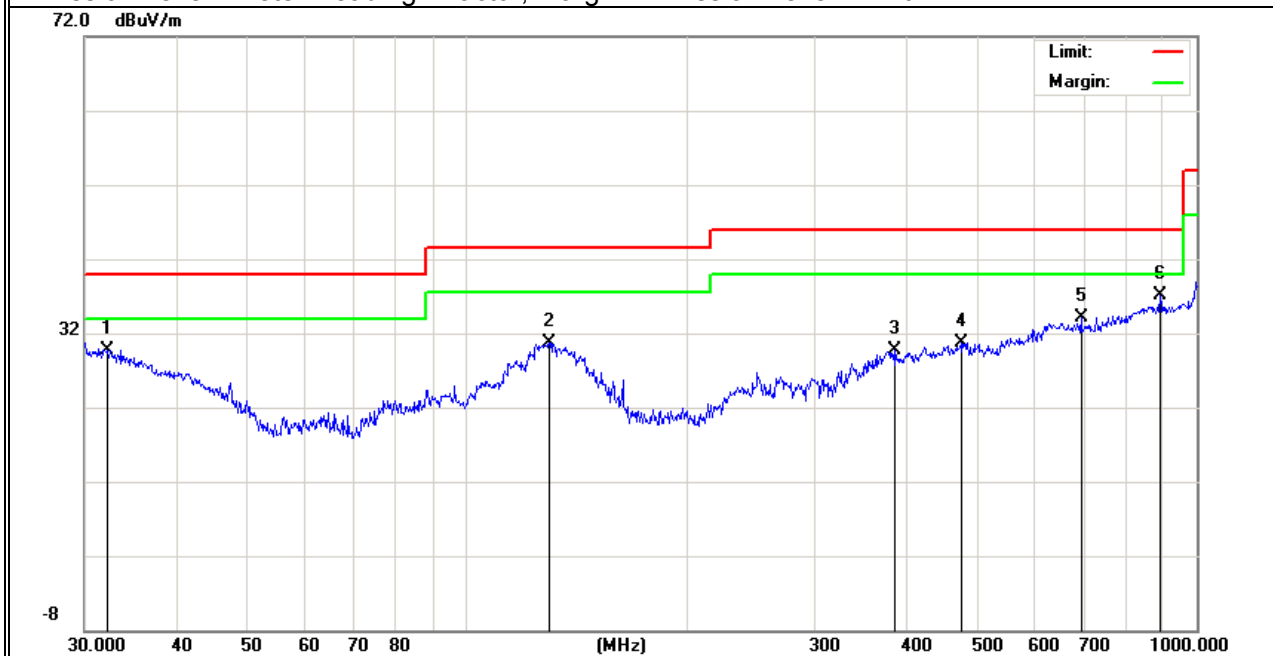

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	31.0701	6.08	25.88	31.96	40.00	-8.04	QP
H	147.4036	10.13	18.57	28.70	43.50	-14.80	QP
H	250.3009	8.13	18.96	27.09	46.00	-18.91	QP
H	308.9125	7.51	20.31	27.82	46.00	-18.18	QP
H	804.6028	5.99	29.60	35.59	46.00	-10.41	QP
H	893.8567	7.20	30.72	37.92	46.00	-8.08	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

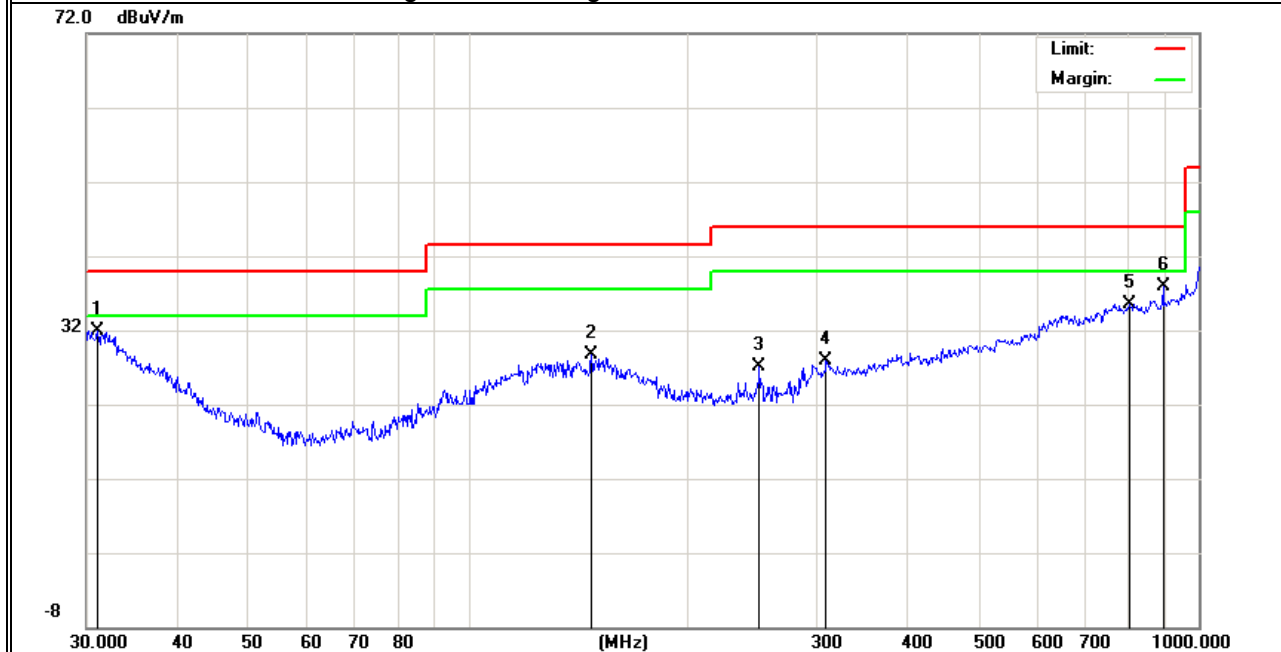

Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	Conferencing room equipment	Model Name :	Max Connect
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n/ax(HT20, HT40)	Test By:	Mukzi Lee

All the modulation modes have been tested, only shown the worst data as below:

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2412 MHz)(802.11b)--Above 1G									
4824	66.45	5.21	35.59	44.30	62.95	74.00	-11.05	Pk	Vertical
4824	46.03	5.21	35.59	44.30	42.53	54.00	-11.47	AV	Vertical
7236	62.68	6.48	36.27	44.60	60.83	74.00	-13.17	Pk	Vertical
7236	49.49	6.48	36.27	44.60	47.64	54.00	-6.36	AV	Vertical
4824	67.79	5.21	35.55	44.30	64.25	74.00	-9.75	Pk	Horizontal
4824	46.77	5.21	35.55	44.30	43.23	54.00	-10.77	AV	Horizontal
7236	66.78	6.48	36.27	44.52	65.01	74.00	-8.99	Pk	Horizontal
7236	43.91	6.48	36.27	44.52	42.14	54.00	-11.86	AV	Horizontal
Mid Channel (2437 MHz)(802.11n20 b)--Above 1G									
4874	65.90	5.21	35.66	44.20	62.57	74.00	-11.43	Pk	Vertical
4874	45.79	5.21	35.66	44.20	42.46	54.00	-11.54	AV	Vertical
7311	65.52	7.10	36.50	44.43	64.69	74.00	-9.31	Pk	Vertical
7311	47.17	7.10	36.50	44.43	46.34	54.00	-7.66	AV	Vertical
4874	63.22	5.21	35.66	44.20	59.89	74.00	-14.11	Pk	Horizontal
4874	49.45	5.21	35.66	44.20	46.12	54.00	-7.88	AV	Horizontal
7311	66.13	7.10	36.50	44.43	65.30	74.00	-8.70	Pk	Horizontal
7311	47.95	7.10	36.50	44.43	47.12	54.00	-6.88	AV	Horizontal
High Channel (2462 MHz)(802.11b)--Above 1G									
4924	63.75	5.21	35.52	44.21	60.27	74.00	-13.73	Pk	Vertical
4924	45.71	5.21	35.52	44.21	42.23	54.00	-11.77	AV	Vertical
7386	64.73	7.10	36.53	44.60	63.76	74.00	-10.24	Pk	Vertical
7386	44.34	7.10	36.53	44.60	43.37	54.00	-10.63	AV	Vertical
4924	66.42	5.21	35.52	44.21	62.94	74.00	-11.06	Pk	Horizontal
4924	43.04	5.21	35.52	44.21	39.56	54.00	-14.44	AV	Horizontal
7386	66.94	7.10	36.53	44.60	65.97	74.00	-8.03	Pk	Horizontal
7386	48.38	7.10	36.53	44.60	47.41	54.00	-6.59	AV	Horizontal

Note:

- (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3)"802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

Spurious Emission in Restricted Band 2310MHz -18000MHz

All the modulation modes have been tested, "802.11b" mode is the worst mode. only shown the worst data as below:

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
802.11b									
2310.00	65.37	2.97	27.21	43.80	51.75	74	-22.25	Pk	Horizontal
2310.00	47.37	2.97	27.21	43.80	33.75	54	-20.25	AV	Horizontal
2310.00	70.03	2.97	27.21	43.80	56.41	74	-17.59	Pk	Vertical
2310.00	51.62	2.97	27.21	43.80	38.00	54	-16.00	AV	Vertical
2390.00	67.06	3.14	27.33	43.80	53.73	74	-20.27	Pk	Vertical
2390.00	49.00	3.14	27.33	43.80	35.67	54	-18.33	AV	Vertical
2390.00	69.31	3.14	27.33	43.80	55.98	74	-18.02	Pk	Horizontal
2390.00	48.29	3.14	27.33	43.80	34.96	54	-19.04	AV	Horizontal
2483.50	71.60	3.58	27.70	44.00	58.88	74	-15.12	Pk	Vertical
2483.50	48.20	3.58	27.70	44.00	35.48	54	-18.52	AV	Vertical
2483.50	70.70	3.58	27.70	44.00	57.98	74	-16.02	Pk	Horizontal
2483.50	51.30	3.58	27.70	44.00	38.58	54	-15.42	AV	Horizontal
802.11g									
2310.00	70.34	2.97	27.21	43.80	56.72	74	-17.28	Pk	Horizontal
2310.00	47.95	2.97	27.21	43.80	34.33	54	-19.67	AV	Horizontal
2310.00	71.74	2.97	27.21	43.80	58.12	74	-15.88	Pk	Vertical
2310.00	48.51	2.97	27.21	43.80	34.89	54	-19.11	AV	Vertical
2390.00	73.40	3.14	27.33	43.80	60.07	74	-13.93	Pk	Vertical
2390.00	50.14	3.14	27.33	43.80	36.81	54	-17.19	AV	Vertical
2390.00	70.48	3.14	27.33	43.80	57.15	74	-16.85	Pk	Horizontal
2390.00	50.61	3.14	27.33	43.80	37.28	54	-16.72	AV	Horizontal
2483.50	68.79	3.58	27.70	44.00	56.07	74	-17.93	Pk	Vertical
2483.50	50.76	3.58	27.70	44.00	38.04	54	-15.96	AV	Vertical
2483.50	68.12	3.58	27.70	44.00	55.40	74	-18.60	Pk	Horizontal
2483.50	48.53	3.58	27.70	44.00	35.81	54	-18.19	AV	Horizontal
802.11n20									
2310.00	73.75	2.97	27.21	43.80	60.13	74	-13.87	Pk	Horizontal
2310.00	49.29	2.97	27.21	43.80	35.67	54	-18.33	AV	Horizontal
2310.00	67.85	2.97	27.21	43.80	54.23	74	-19.77	Pk	Vertical
2310.00	48.81	2.97	27.21	43.80	35.19	54	-18.81	AV	Vertical
2390.00	64.64	3.14	27.33	43.80	51.31	74	-22.69	Pk	Vertical
2390.00	48.21	3.14	27.33	43.80	34.88	54	-19.12	AV	Vertical
2390.00	64.77	3.14	27.33	43.80	51.44	74	-22.56	Pk	Horizontal
2390.00	49.87	3.14	27.33	43.80	36.54	54	-17.46	AV	Horizontal
2483.50	69.41	3.58	27.70	44.00	56.69	74	-17.31	Pk	Vertical
2483.50	49.27	3.58	27.70	44.00	36.55	54	-17.45	AV	Vertical
2483.50	65.20	3.58	27.70	44.00	52.48	74	-21.52	Pk	Horizontal
2483.50	48.27	3.58	27.70	44.00	35.55	54	-18.45	AV	Horizontal

802.11ax20									
2310.00	74.26	2.97	27.21	43.80	60.64	74	-13.36	Pk	Horizontal
2310.00	54.18	2.97	27.21	43.80	40.56	54	-13.44	AV	Horizontal
2310.00	72.33	2.97	27.21	43.80	58.71	74	-15.29	Pk	Vertical
2310.00	58.59	2.97	27.21	43.80	44.97	54	-9.03	AV	Vertical
2390.00	69.22	3.14	27.33	43.80	55.89	74	-18.11	Pk	Vertical
2390.00	47.50	3.14	27.33	43.80	34.17	54	-19.83	AV	Vertical
2390.00	71.61	3.14	27.33	43.80	58.28	74	-15.72	Pk	Horizontal
2390.00	47.95	3.14	27.33	43.80	34.62	54	-19.38	AV	Horizontal
2483.50	71.08	3.58	27.70	44.00	58.36	74	-15.64	Pk	Vertical
2483.50	51.73	3.58	27.70	44.00	39.01	54	-14.99	AV	Vertical
2483.50	69.40	3.58	27.70	44.00	56.68	74	-17.32	Pk	Horizontal
2483.50	49.88	3.58	27.70	44.00	37.16	54	-16.84	AV	Horizontal

Spurious Emission in Restricted Bands 3260MHz- 18000MHz

All the modulation modes have been tested, only shown the worst data as below:

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	63.15	4.04	29.57	44.70	52.06	74	-21.94	Pk	Vertical
3260	51.77	4.04	29.57	44.70	40.68	54	-13.32	AV	Vertical
3260	69.46	4.04	29.57	44.70	58.37	74	-15.63	Pk	Horizontal
3260	47.73	4.04	29.57	44.70	36.64	54	-17.36	AV	Horizontal
3332	65.89	4.26	29.87	44.40	55.62	74	-18.38	Pk	Vertical
3332	47.90	4.26	29.87	44.40	37.63	54	-16.37	AV	Vertical
3332	67.74	4.26	29.87	44.40	57.47	74	-16.53	Pk	Horizontal
3332	49.81	4.26	29.87	44.40	39.54	54	-14.46	AV	Horizontal
17797	47.15	10.99	43.95	43.50	58.59	74	-15.41	Pk	Vertical
17797	37.92	10.99	43.95	43.50	49.36	54	-4.64	AV	Vertical
17788	47.00	11.81	43.69	44.60	57.90	74	-16.10	Pk	Horizontal
17788	35.82	11.81	43.69	44.60	46.72	54	-7.28	AV	Horizontal

“802.11b” mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.2.

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

7.3.6 Test Results

EUT:	Conferencing room equipment	Model Name :	Max Connect
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/ax20	Test By:	Mukzi Lee

Test data reference attachment.

7.4 MAXIMUM OUTPUT POWER

7.4.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.3.2.3.

7.4.2 Conformance Limit


The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.4.3 Measuring Instruments

The following table is the setting of the power meter.

Power meter parameter	Setting
Detector	Peak

7.4.4 Test Setup

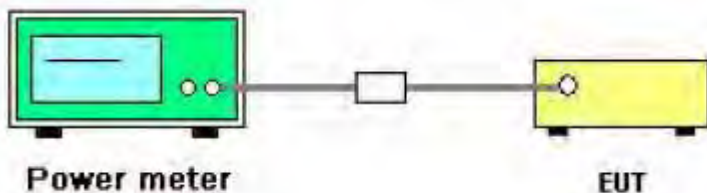

7.4.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.9.1.3 of ANSI C63.10

7.4.6 EUT operation during Test

The EUT was programmed to be in continuously transmitting mode.

7.4.7 Test Results

EUT:	Conferencing room equipment	Model Name :	Max Connect
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/ax20	Test By:	Mukzi Lee

For 2.4G band. Directional gain=6.67dBi; 6.67dBi>6dBi, so conducted power limit= 29.33dBm.

Test data reference attachment.

7.5 POWER SPECTRAL DENSITY

7.5.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.4.

7.5.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.2 of ANSI C63.10

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 * \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.5.6 Test Results

EUT:	Conferencing room equipment	Model Name :	Max Connect
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/ax20	Test By:	Mukzi Lee

For 2.4G band, 802.11n20 has MIMO mode. Directional gain=6.67dBi
6.67 dBi>6.0 dBi, so MIMO power spectral density limit= 7.33dBm / 3kHz;

Test data reference attachment.

7.6 CONDUCTED BAND EDGE MEASUREMENT

7.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.7.

7.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.7.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

7.6.6 Test Results

EUT:	Conferencing room equipment	Model Name :	Max Connect
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/ax20	Test By:	Mukzi Lee

Test data reference attachment.

7.7 SPURIOUS RF CONDUCTED EMISSIONS

7.7.1 Conformance Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.7.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.3 Test Setup

Please refer to Section 6.1 of this test report.

7.7.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 25GHz.

7.7.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test data reference attachment.

7.8 ANTENNA APPLICATION

7.8.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.8.2 Result

The EUT antenna is permanent attached FPCB antenna (Gain:Ant 1:3.91 dBi; Ant 2: 3.41dBi) It comply with the standard requirement.

8 TEST RESULTS

8.1 2.4G WIFI


8.1.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	ax20	2412	Ant 1	11.11	30	Pass
NVNT	ax20	2437	Ant 1	11.06	30	Pass
NVNT	ax20	2462	Ant 1	11.15	30	Pass
NVNT	ax20	2412	Ant 2	12.04	30	Pass
NVNT	ax20	2437	Ant 2	12.03	30	Pass
NVNT	ax20	2462	Ant 2	11.29	30	Pass
NVNT	b	2412	Ant 1	15.51	30	Pass
NVNT	b	2437	Ant 1	15.62	30	Pass
NVNT	b	2462	Ant 1	16.09	30	Pass
NVNT	b	2412	Ant 2	16.03	30	Pass
NVNT	b	2437	Ant 2	16.1	30	Pass
NVNT	b	2462	Ant 2	15.6	30	Pass
NVNT	g	2412	Ant 1	13.53	30	Pass
NVNT	g	2437	Ant 1	13.46	30	Pass
NVNT	g	2462	Ant 1	13.63	30	Pass
NVNT	g	2412	Ant 2	13.35	30	Pass
NVNT	g	2437	Ant 2	13.29	30	Pass
NVNT	g	2462	Ant 2	12.88	30	Pass
NVNT	n20	2412	Ant 1	11.94	30	Pass
NVNT	n20	2437	Ant 1	11.81	30	Pass
NVNT	n20	2462	Ant 1	10.93	30	Pass
NVNT	n20	2412	Ant 2	11.78	30	Pass
NVNT	n20	2437	Ant 2	11.92	30	Pass
NVNT	n20	2462	Ant 2	11.05	30	Pass


8.1.2 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	ax20	2412	Ant 1	19.041	0.5	Pass
NVNT	ax20	2437	Ant 1	19.044	0.5	Pass
NVNT	ax20	2462	Ant 1	19.035	0.5	Pass
NVNT	ax20	2412	Ant 2	19.077	0.5	Pass
NVNT	ax20	2437	Ant 2	19.065	0.5	Pass
NVNT	ax20	2462	Ant 2	19.002	0.5	Pass
NVNT	b	2412	Ant 1	7.56	0.5	Pass
NVNT	b	2437	Ant 1	6.57	0.5	Pass
NVNT	b	2462	Ant 1	7.071	0.5	Pass
NVNT	b	2412	Ant 2	7.5	0.5	Pass
NVNT	b	2437	Ant 2	6.57	0.5	Pass
NVNT	b	2462	Ant 2	7.539	0.5	Pass
NVNT	g	2412	Ant 1	16.461	0.5	Pass
NVNT	g	2437	Ant 1	16.482	0.5	Pass
NVNT	g	2462	Ant 1	16.461	0.5	Pass
NVNT	g	2412	Ant 2	16.518	0.5	Pass
NVNT	g	2437	Ant 2	16.491	0.5	Pass
NVNT	g	2462	Ant 2	16.5	0.5	Pass
NVNT	n20	2412	Ant 1	17.682	0.5	Pass
NVNT	n20	2437	Ant 1	17.703	0.5	Pass
NVNT	n20	2462	Ant 1	17.646	0.5	Pass
NVNT	n20	2412	Ant 2	17.718	0.5	Pass
NVNT	n20	2437	Ant 2	17.694	0.5	Pass
NVNT	n20	2462	Ant 2	17.748	0.5	Pass


-6dB Bandwidth NVNT ax20 2412MHz Ant 1

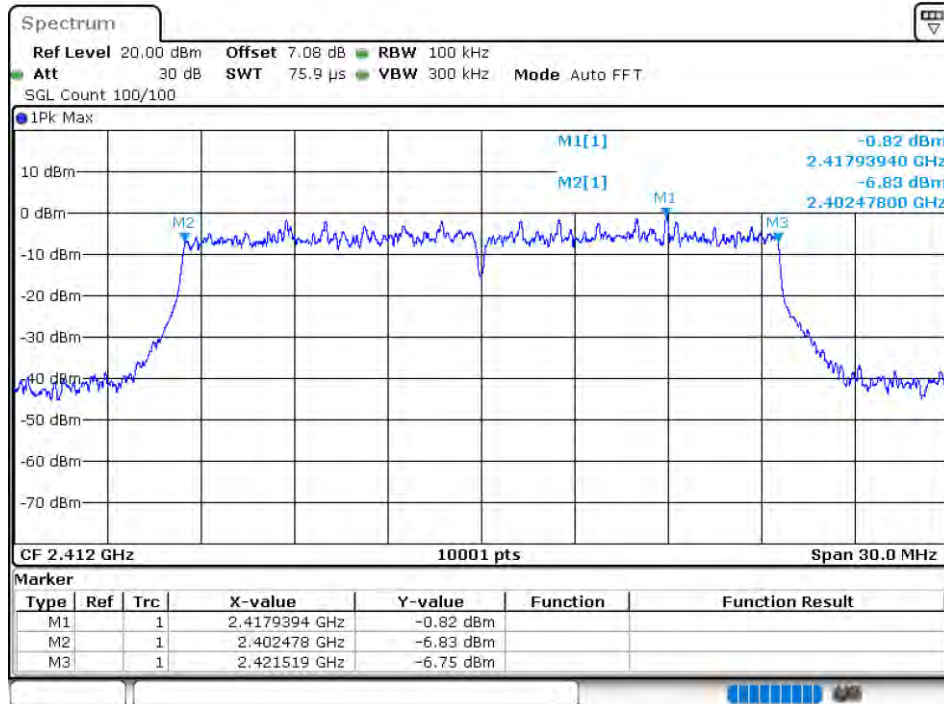


-6dB Bandwidth NVNT ax20 2437MHz Ant 1

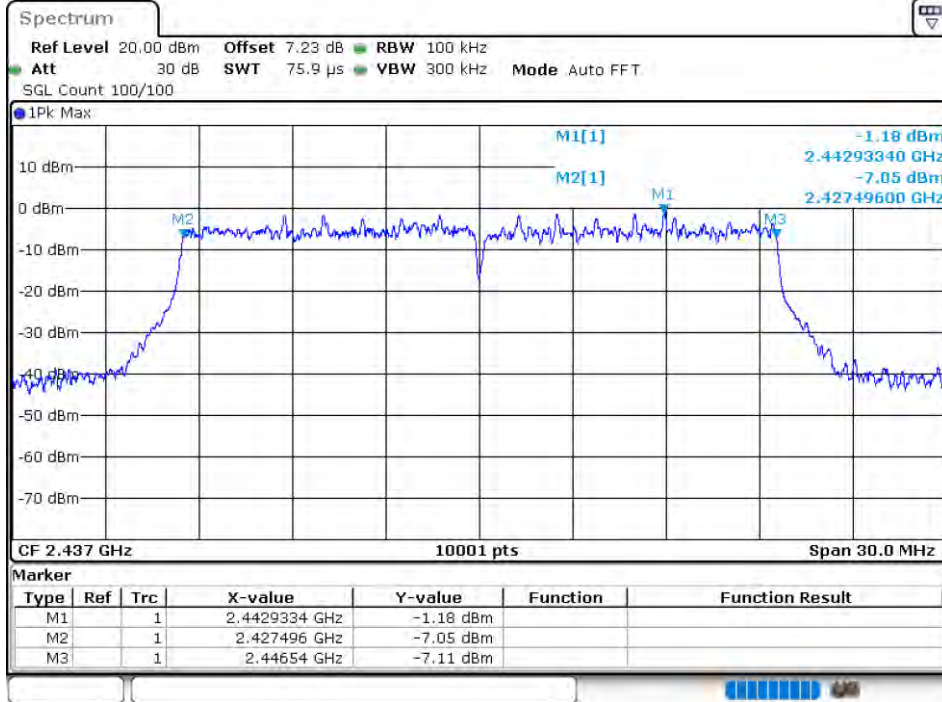


-6dB Bandwidth NVNT ax20 2462MHz Ant 1

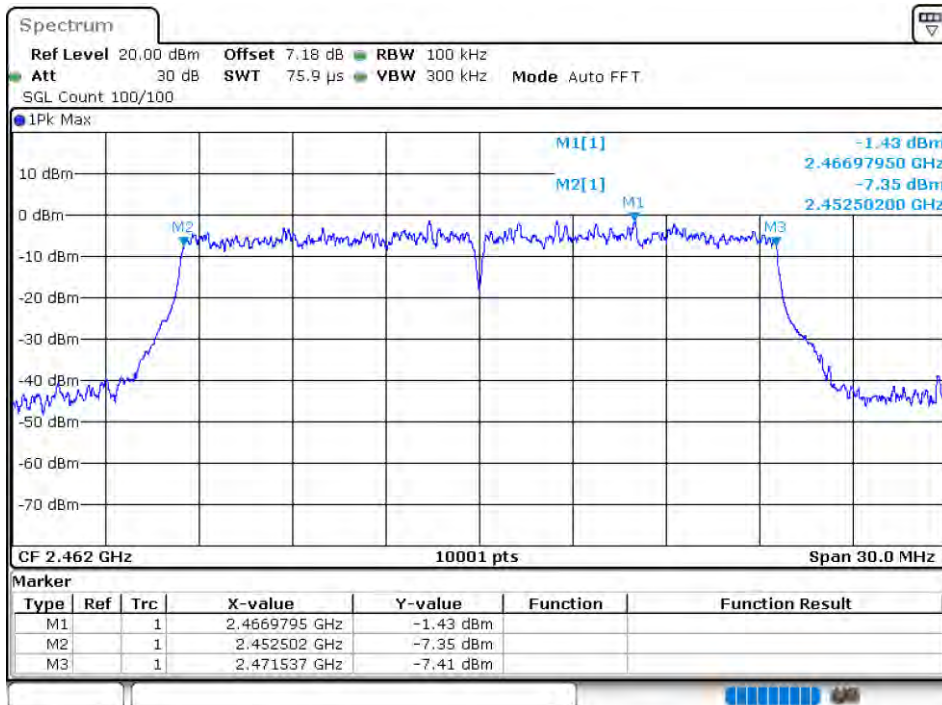


-6dB Bandwidth NVNT ax20 2412MHz Ant 2

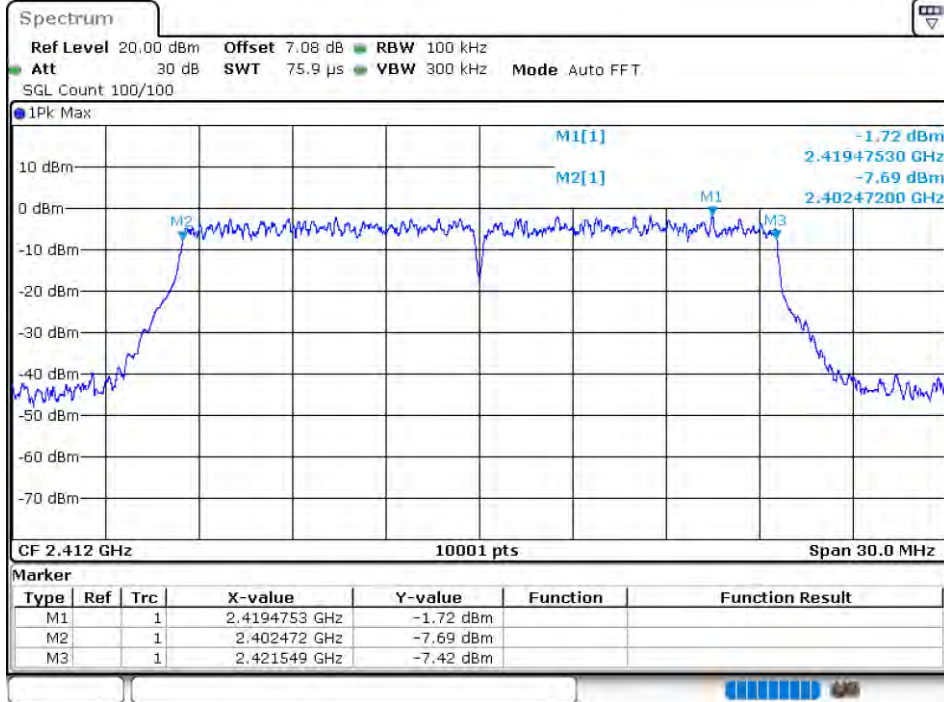


-6dB Bandwidth NVNT ax20 2437MHz Ant 2

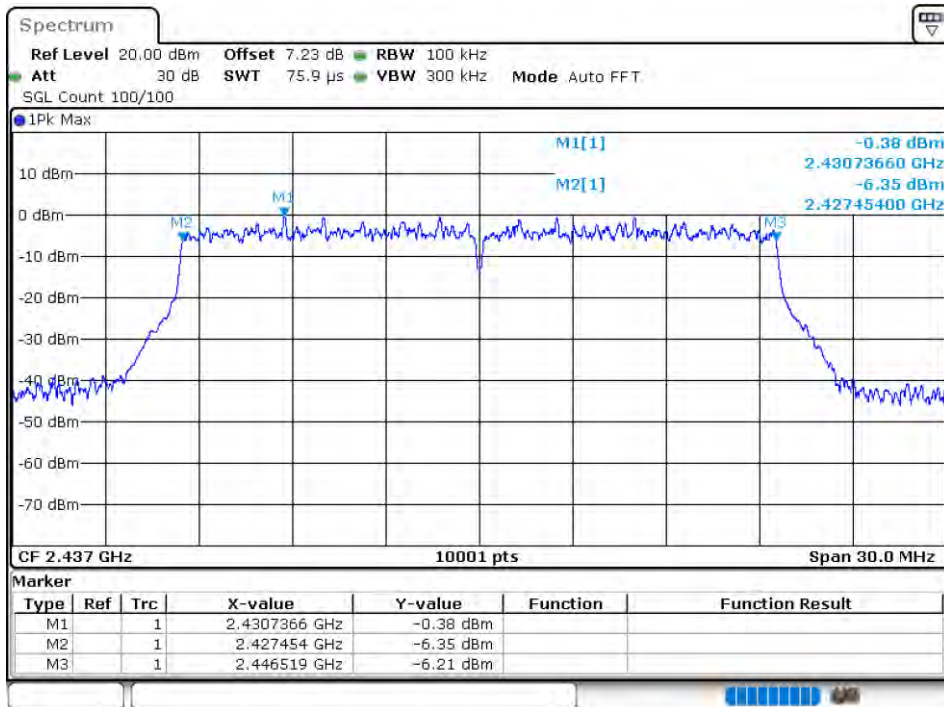


-6dB Bandwidth NVNT ax20 2462MHz Ant 2

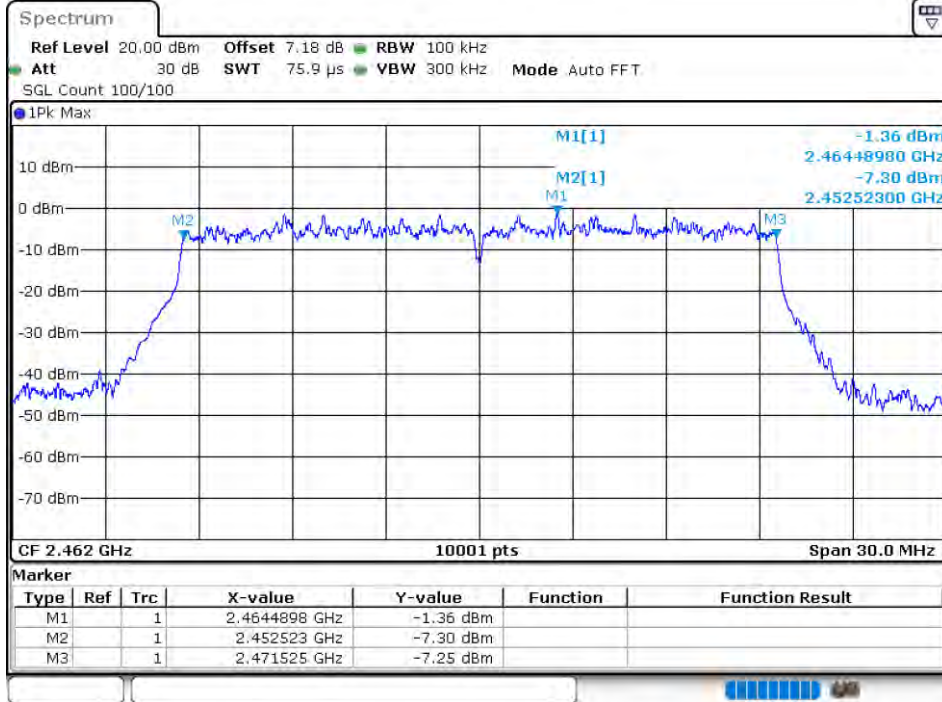


-6dB Bandwidth NVNT b 2412MHz Ant 1

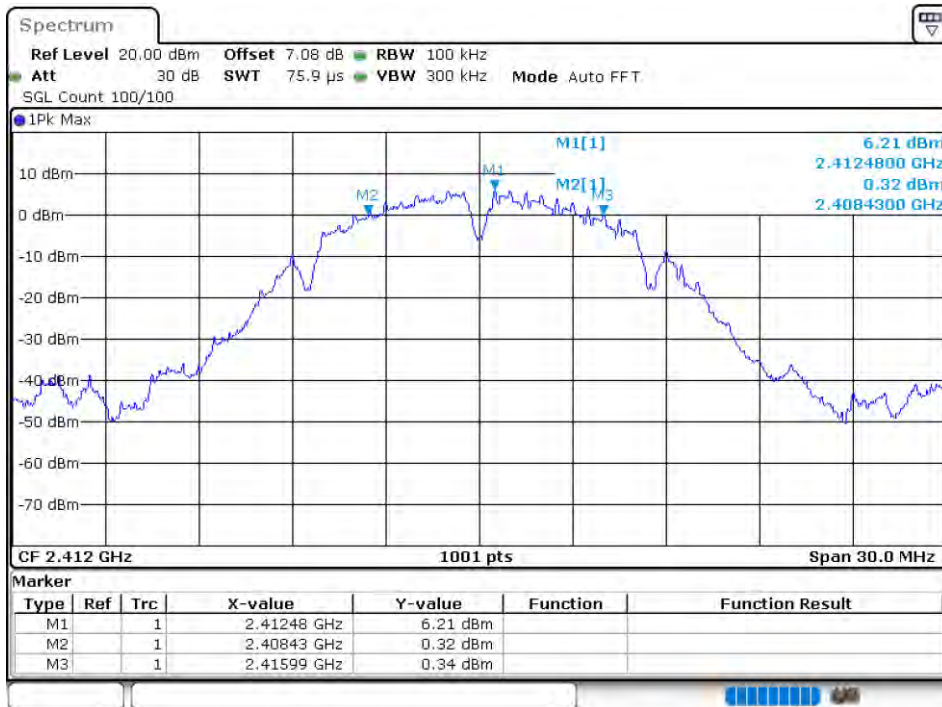


-6dB Bandwidth NVNT b 2437MHz Ant 1

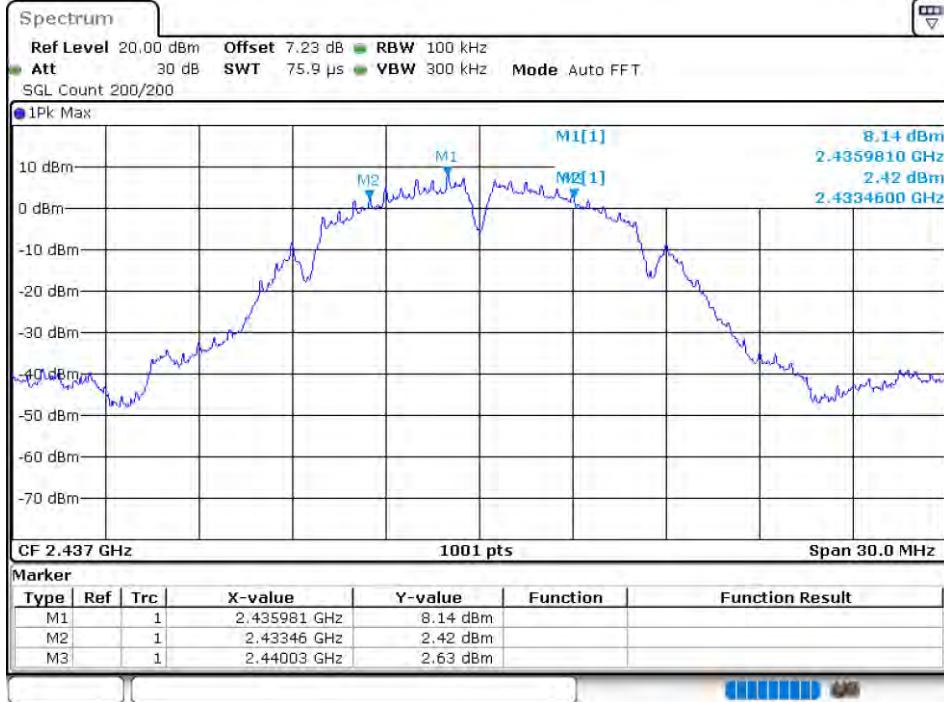


-6dB Bandwidth NVNT b 2462MHz Ant 1

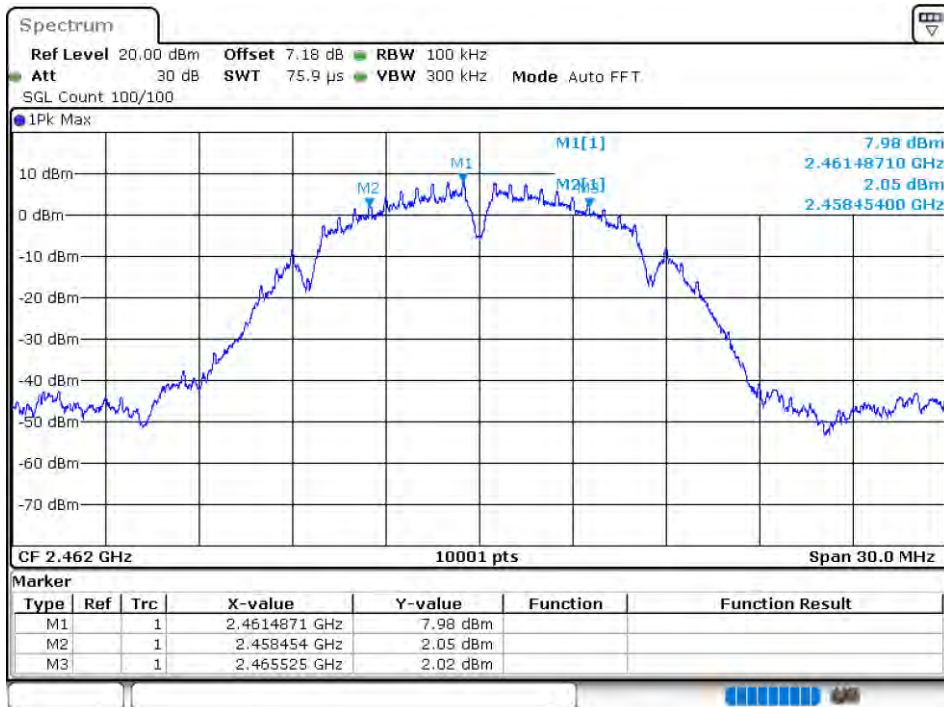


-6dB Bandwidth NVNT b 2412MHz Ant 2

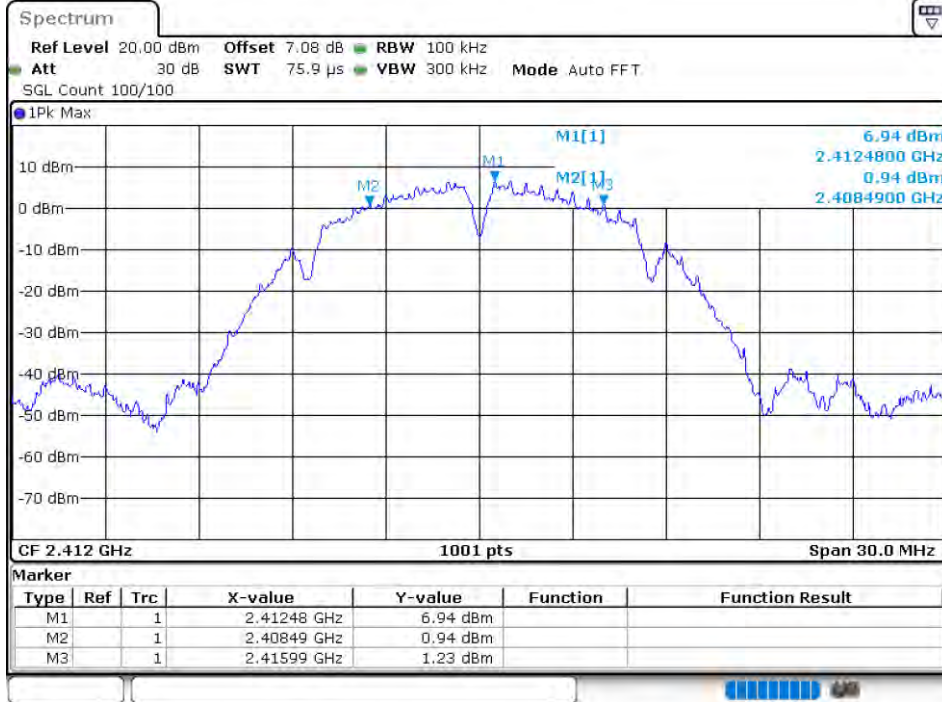


-6dB Bandwidth NVNT b 2437MHz Ant 2

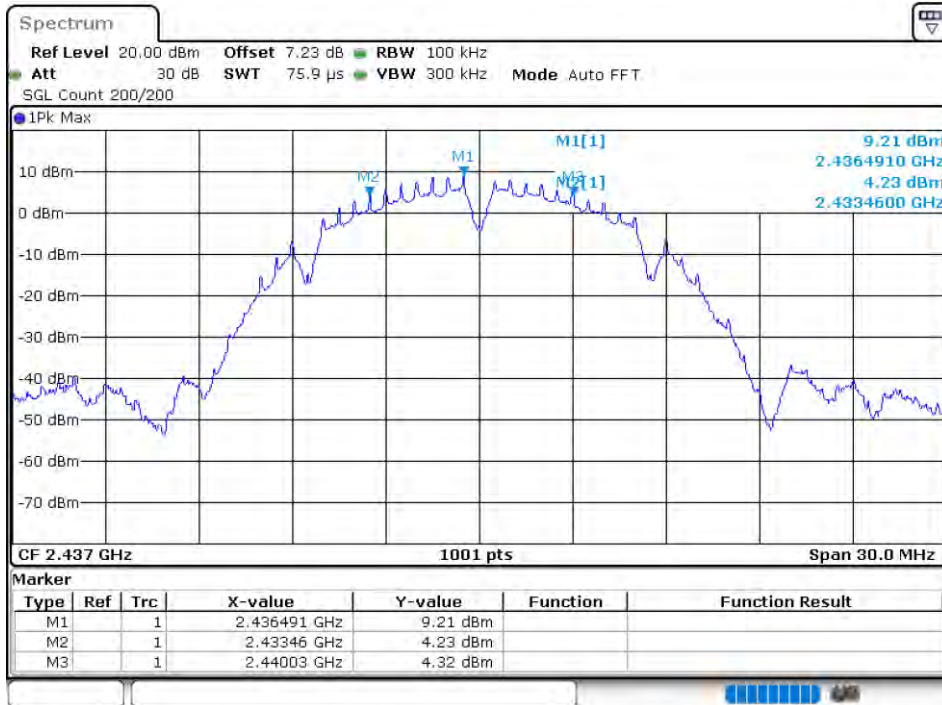


-6dB Bandwidth NVNT b 2462MHz Ant 2

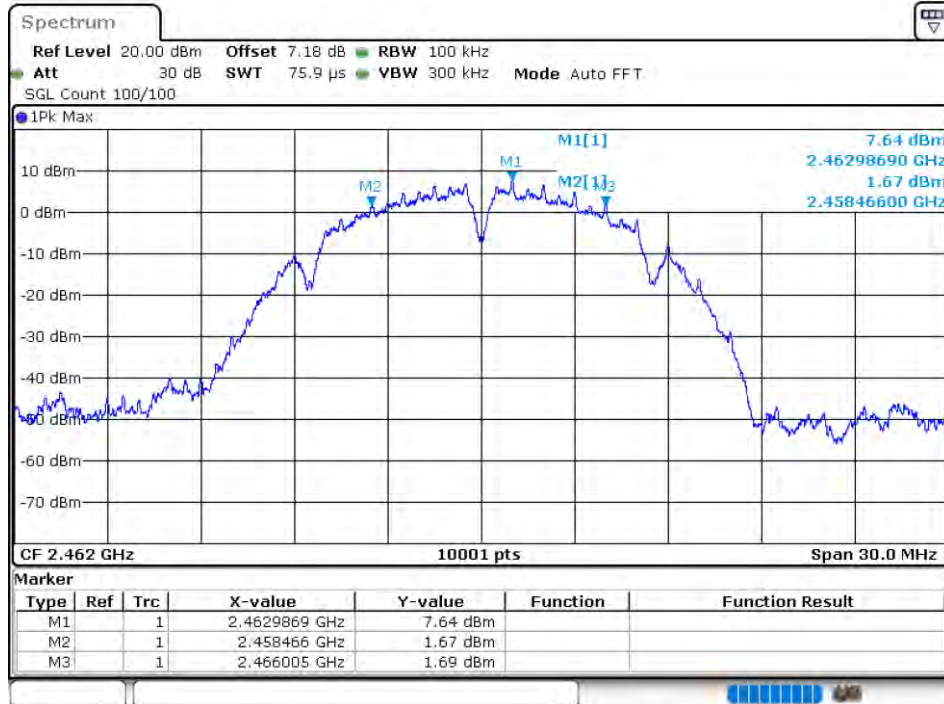


-6dB Bandwidth NVNT g 2412MHz Ant 1

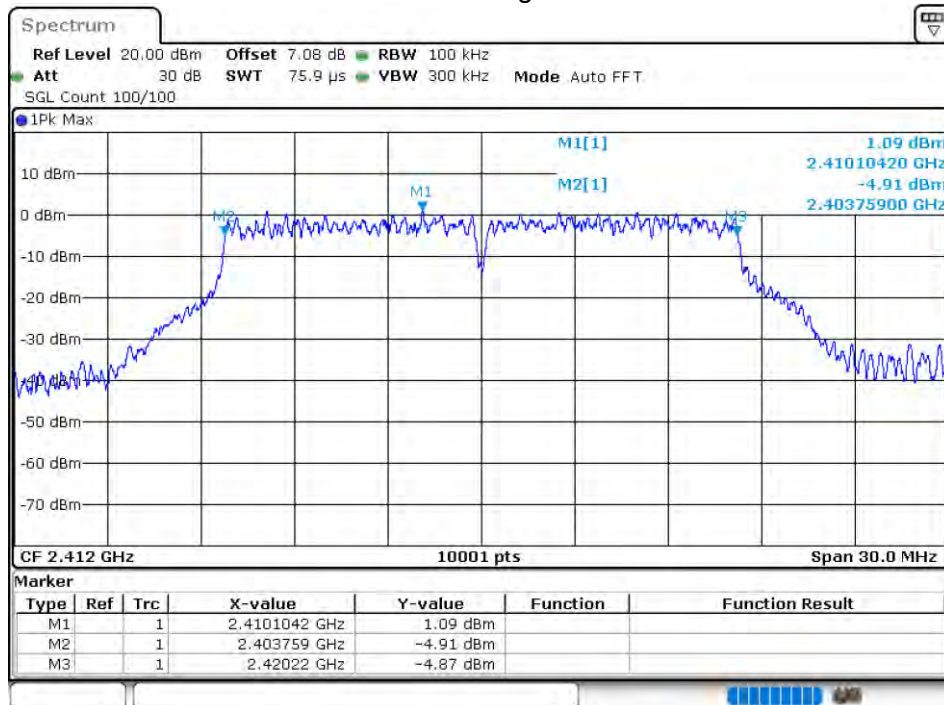


-6dB Bandwidth NVNT g 2437MHz Ant 1

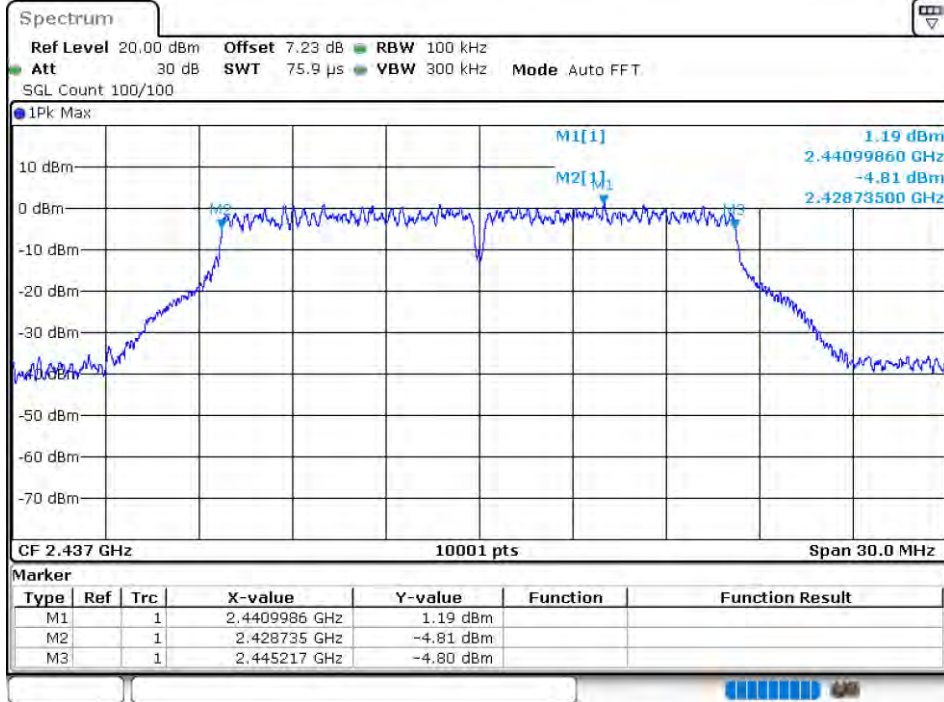


-6dB Bandwidth NVNT g 2462MHz Ant 1

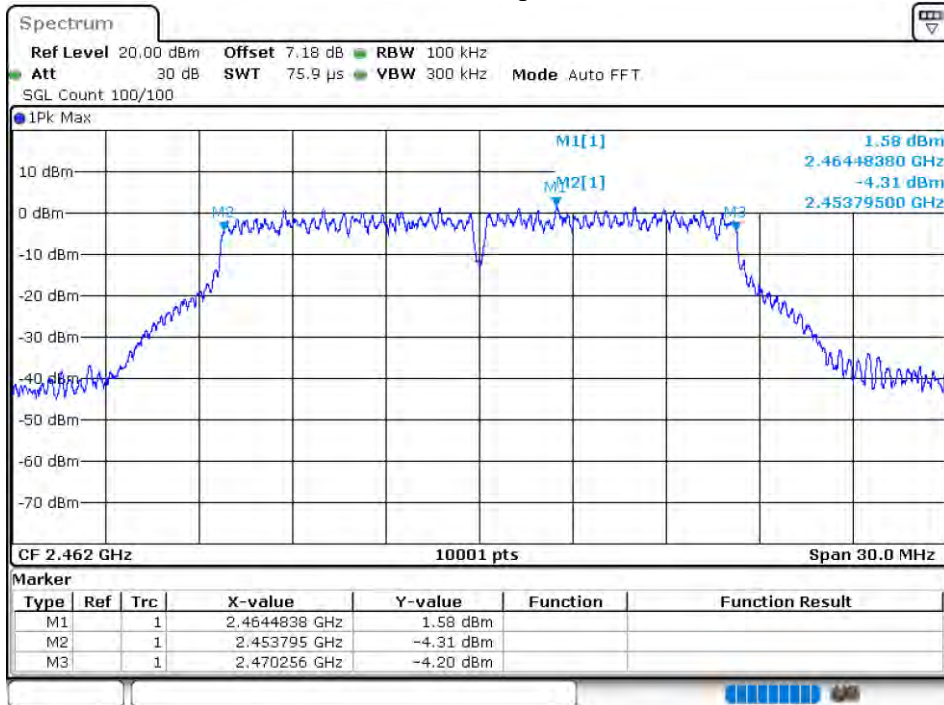


-6dB Bandwidth NVNT g 2412MHz Ant 2

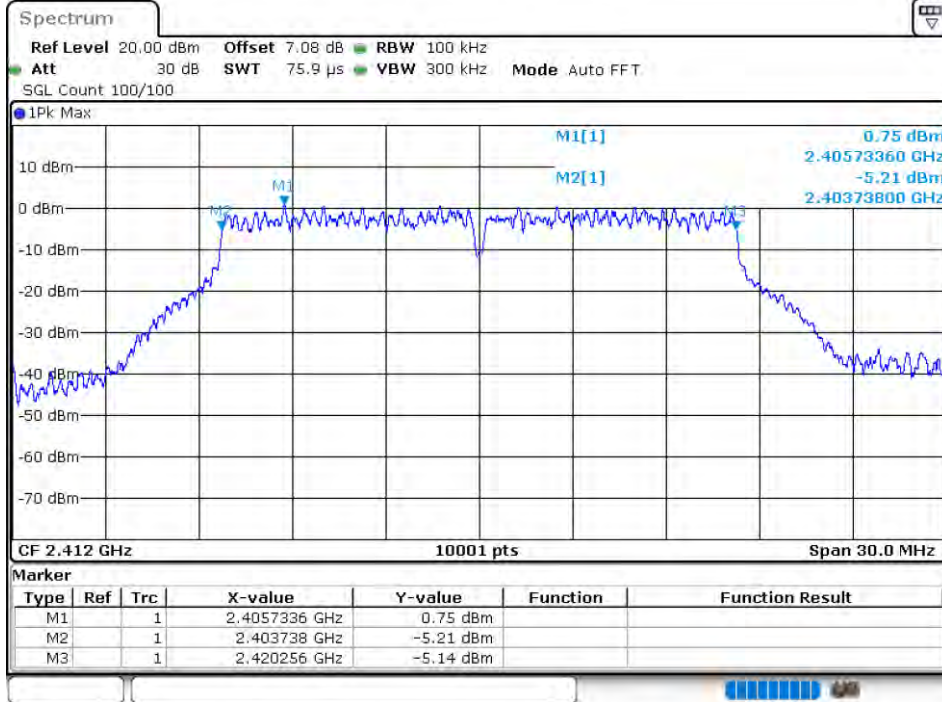


-6dB Bandwidth NVNT g 2437MHz Ant 2

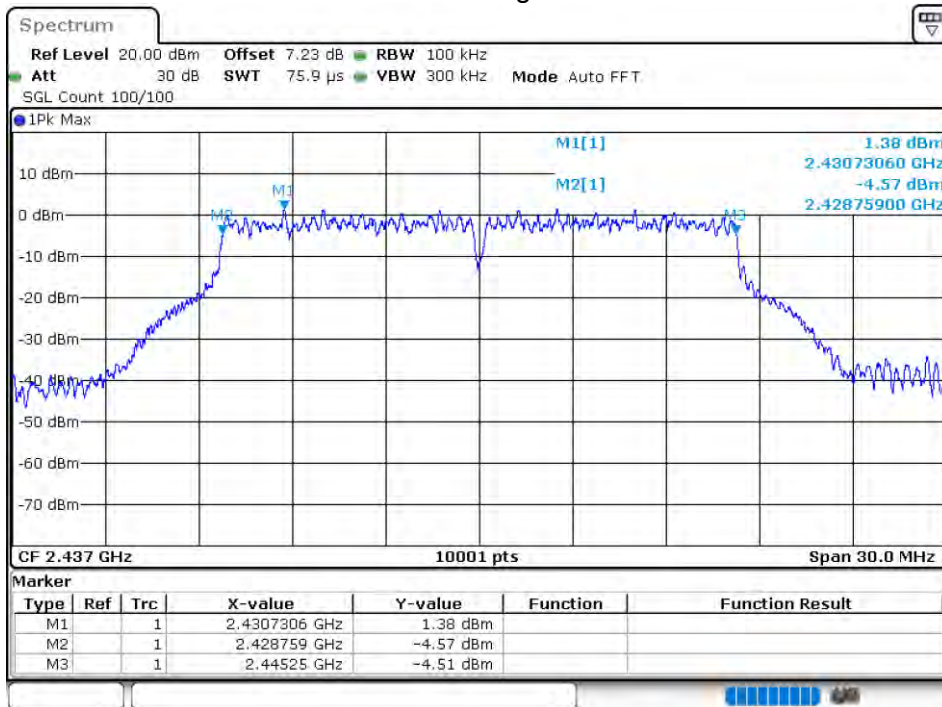


-6dB Bandwidth NVNT g 2462MHz Ant 2

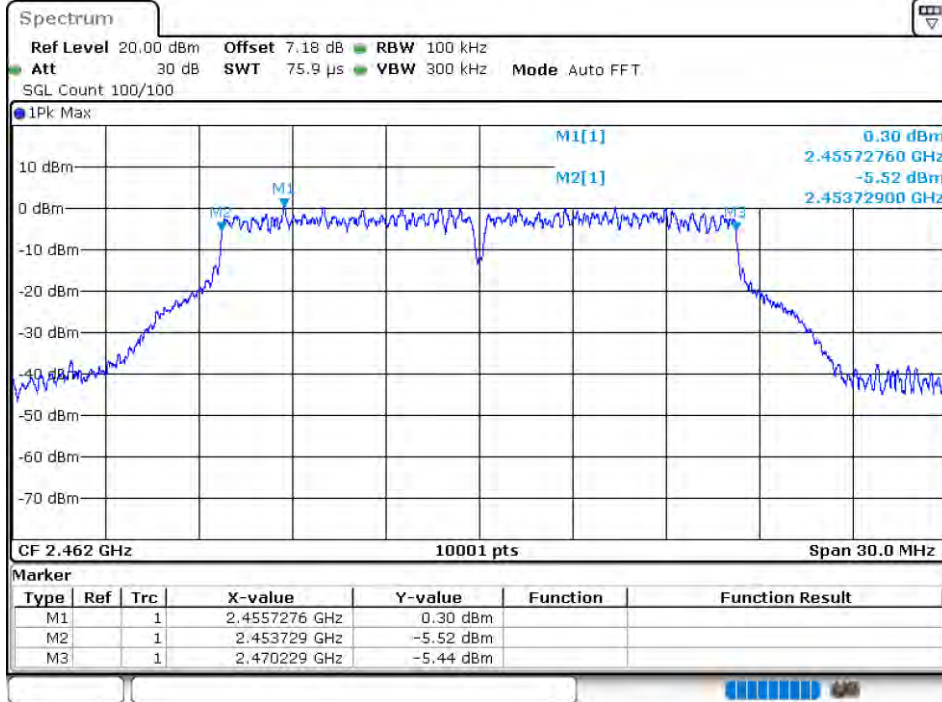


-6dB Bandwidth NVNT n20 2412MHz Ant 1

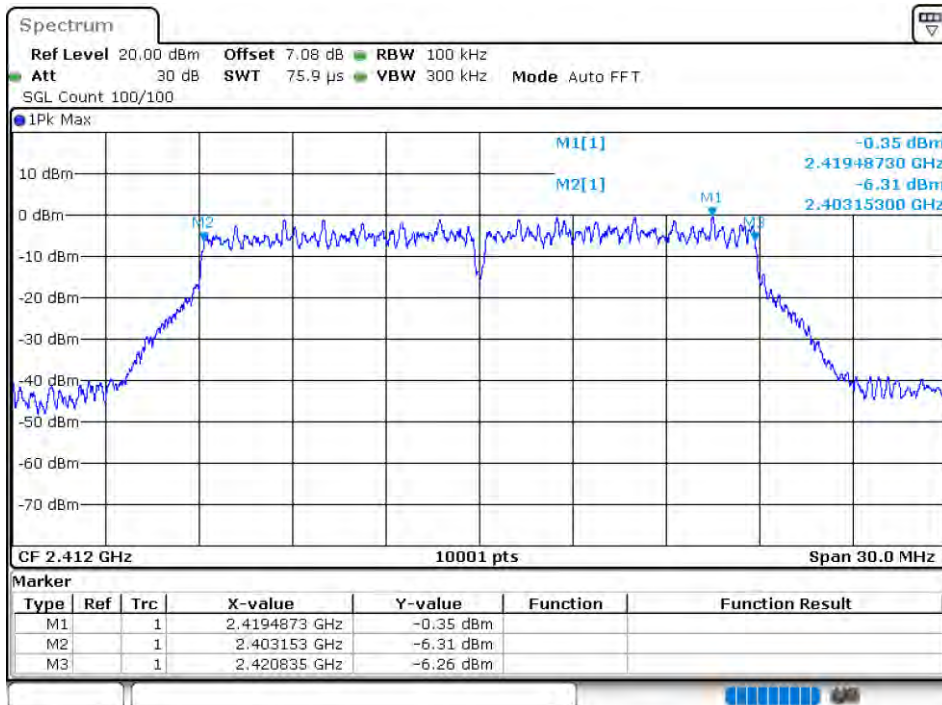


-6dB Bandwidth NVNT n20 2437MHz Ant 1

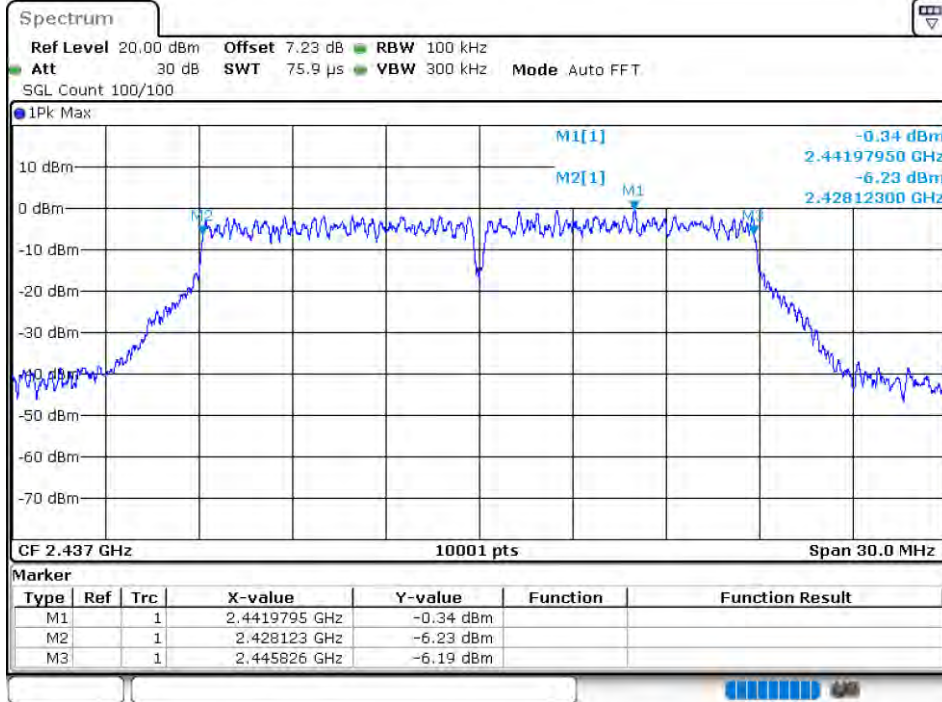


-6dB Bandwidth NVNT n20 2462MHz Ant 1

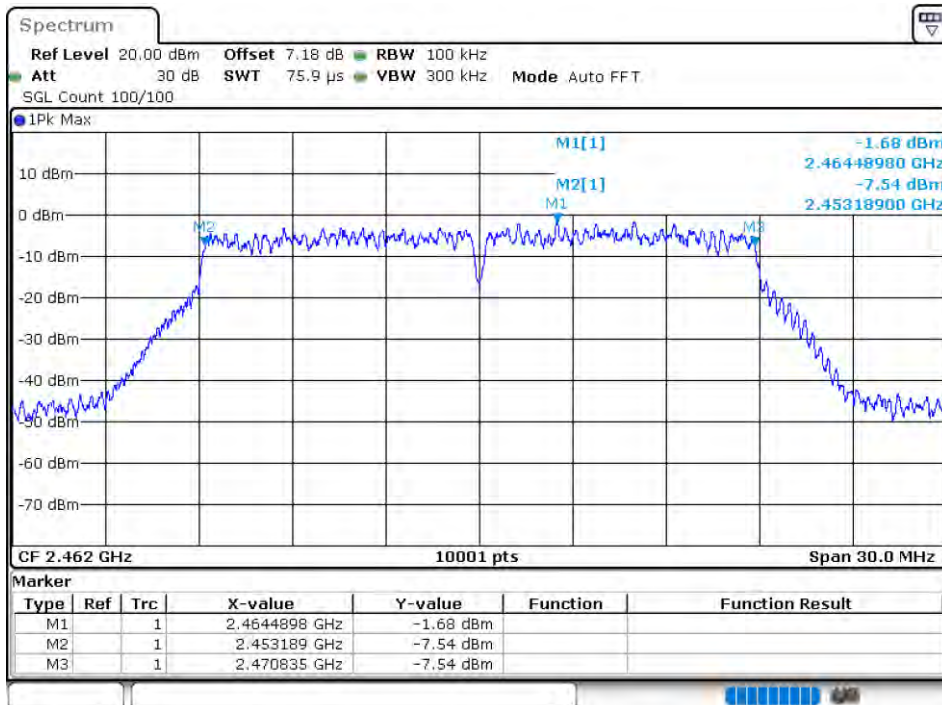


-6dB Bandwidth NVNT n20 2412MHz Ant 2

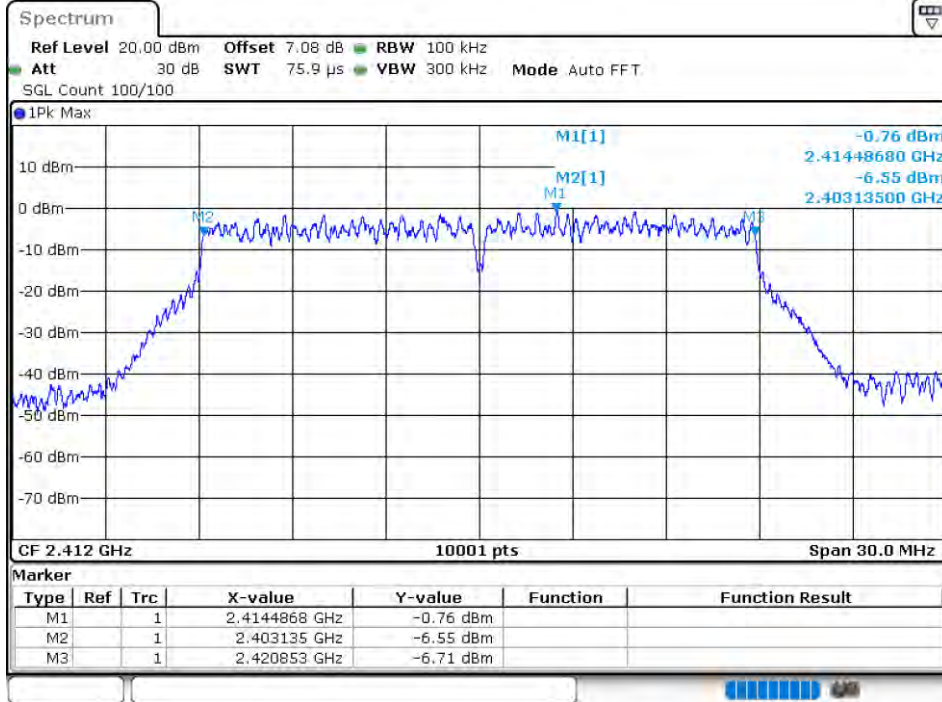

-6dB Bandwidth NVNT n20 2437MHz Ant 2

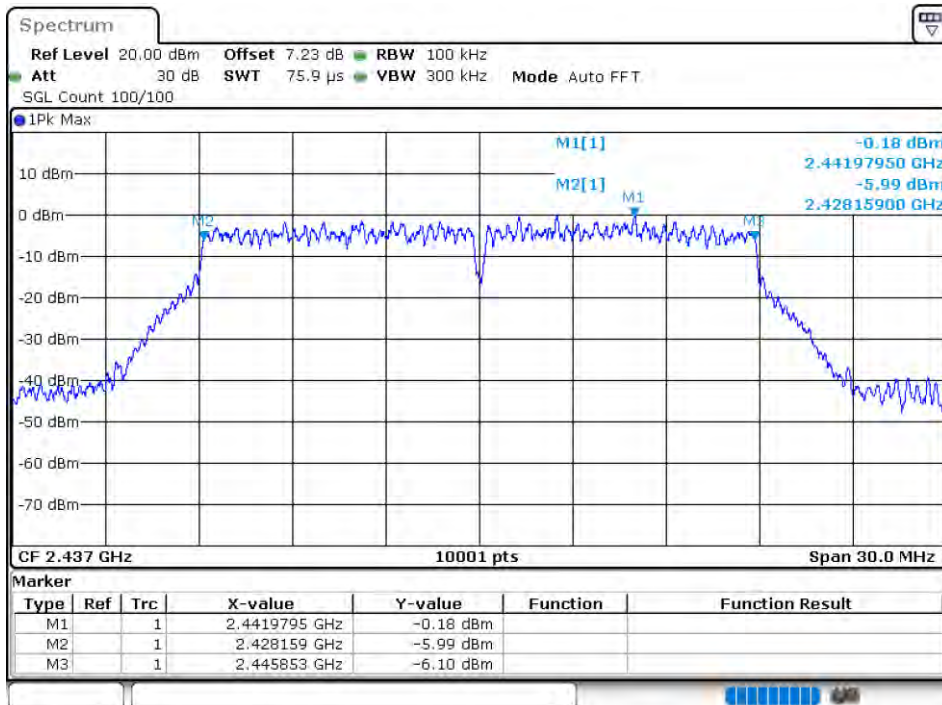


-6dB Bandwidth NVNT n20 2462MHz Ant 2

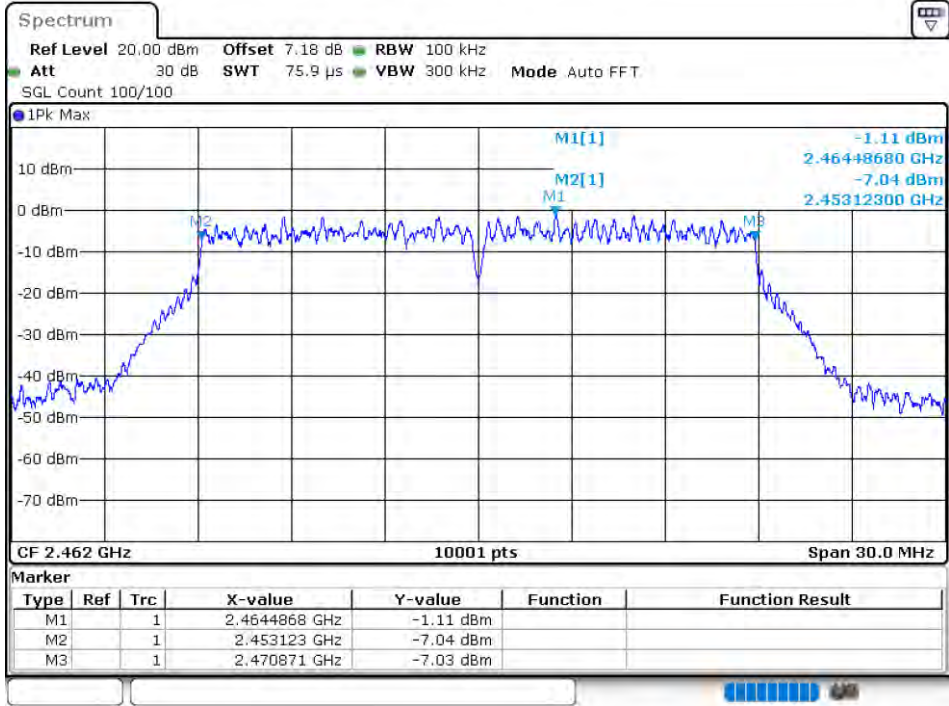


8.1.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	ax20	2412	Ant 1	18.997
NVNT	ax20	2437	Ant 1	18.973
NVNT	ax20	2462	Ant 1	18.952
NVNT	ax20	2412	Ant 2	19.048
NVNT	ax20	2437	Ant 2	18.976
NVNT	ax20	2462	Ant 2	18.967
NVNT	b	2412	Ant 1	10.819
NVNT	b	2437	Ant 1	10.43
NVNT	b	2462	Ant 1	10.46
NVNT	b	2412	Ant 2	10.519
NVNT	b	2437	Ant 2	10.699
NVNT	b	2462	Ant 2	10.37
NVNT	g	2412	Ant 1	16.546
NVNT	g	2437	Ant 1	16.552
NVNT	g	2462	Ant 1	16.543
NVNT	g	2412	Ant 2	16.648
NVNT	g	2437	Ant 2	16.597
NVNT	g	2462	Ant 2	16.537
NVNT	n20	2412	Ant 1	17.827
NVNT	n20	2437	Ant 1	17.722
NVNT	n20	2462	Ant 1	17.725
NVNT	n20	2412	Ant 2	17.77
NVNT	n20	2437	Ant 2	17.752
NVNT	n20	2462	Ant 2	17.767


OBW NVNT ax20 2412MHz Ant 1

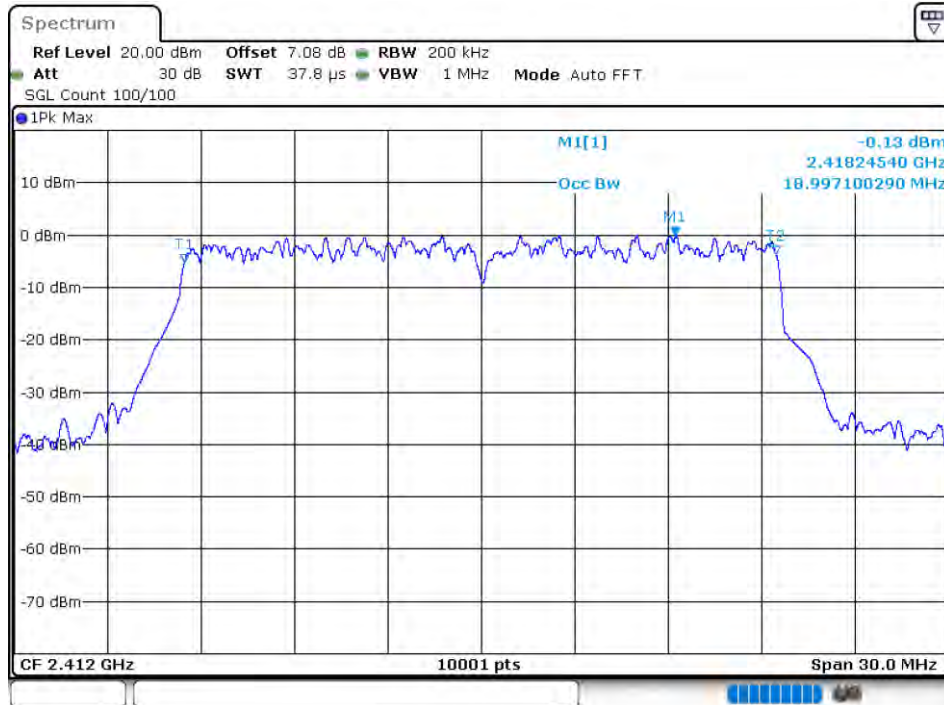


OBW NVNT ax20 2437MHz Ant 1

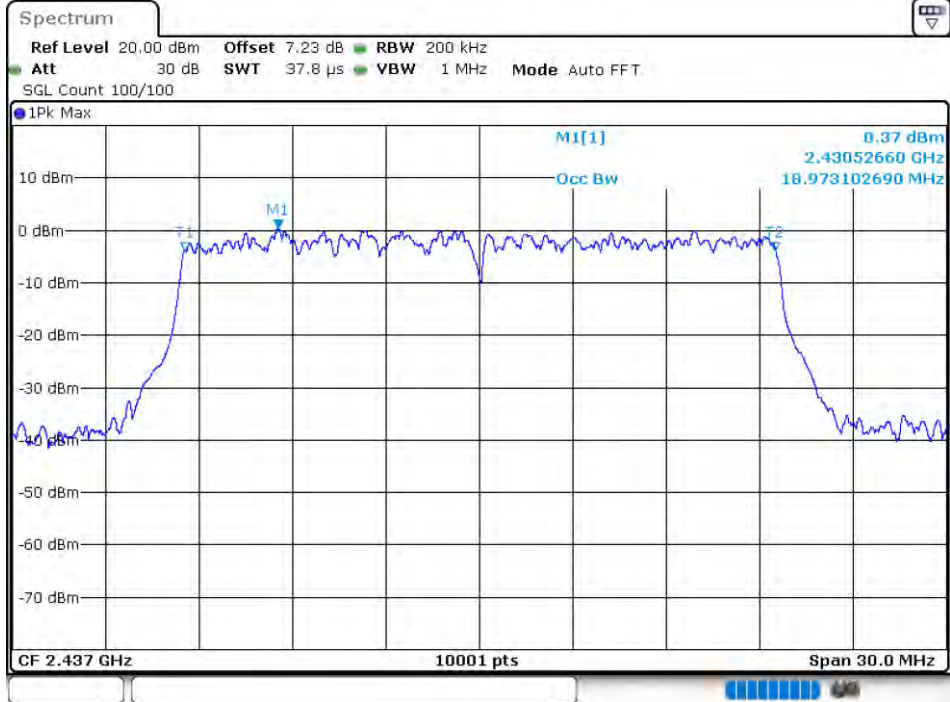


OBW NVNT ax20 2462MHz Ant 1

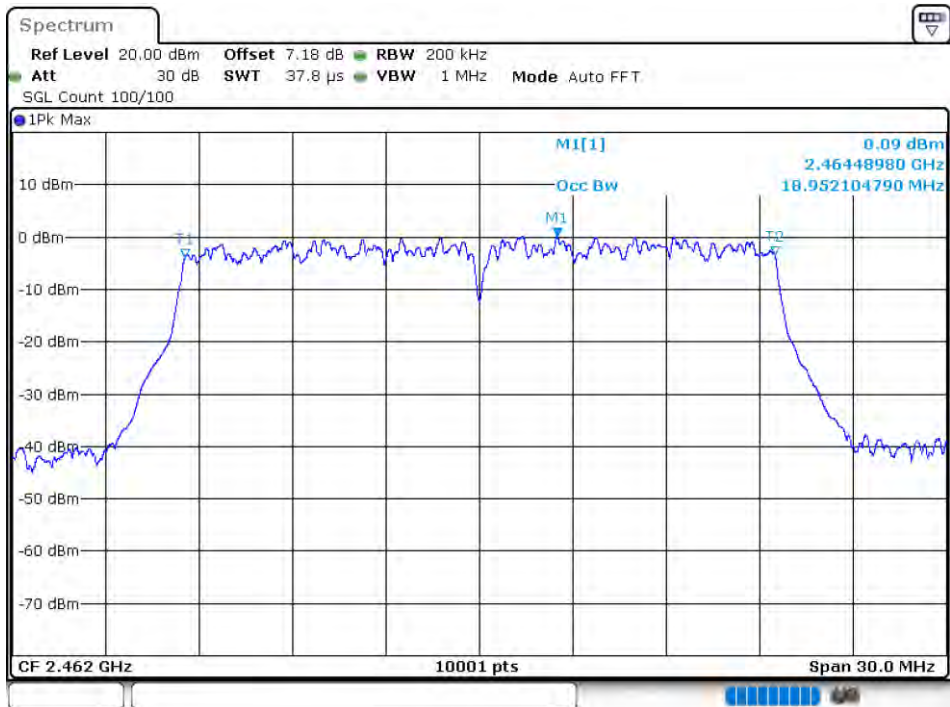


OBW NVNT ax20 2412MHz Ant 2

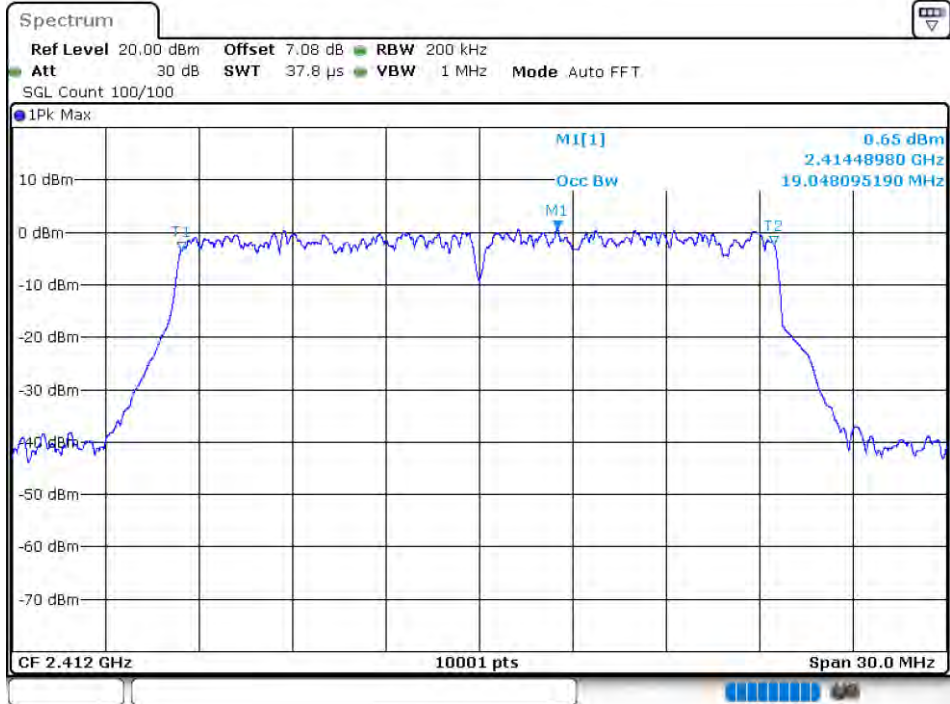


OBW NVNT ax20 2437MHz Ant 2

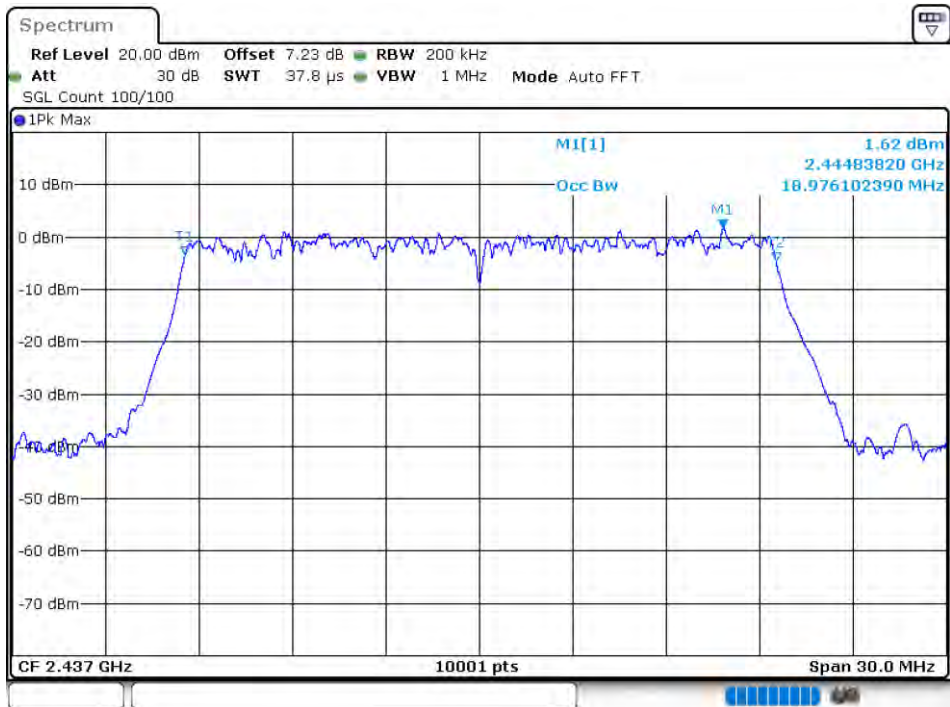


OBW NVNT ax20 2462MHz Ant 2

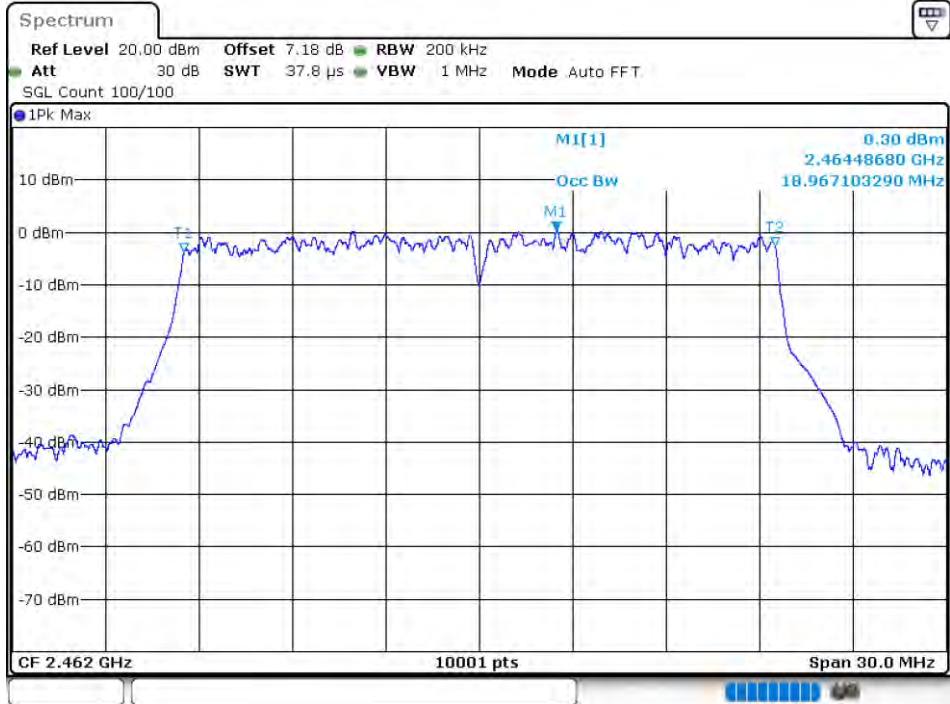


OBW NVNT b 2412MHz Ant 1

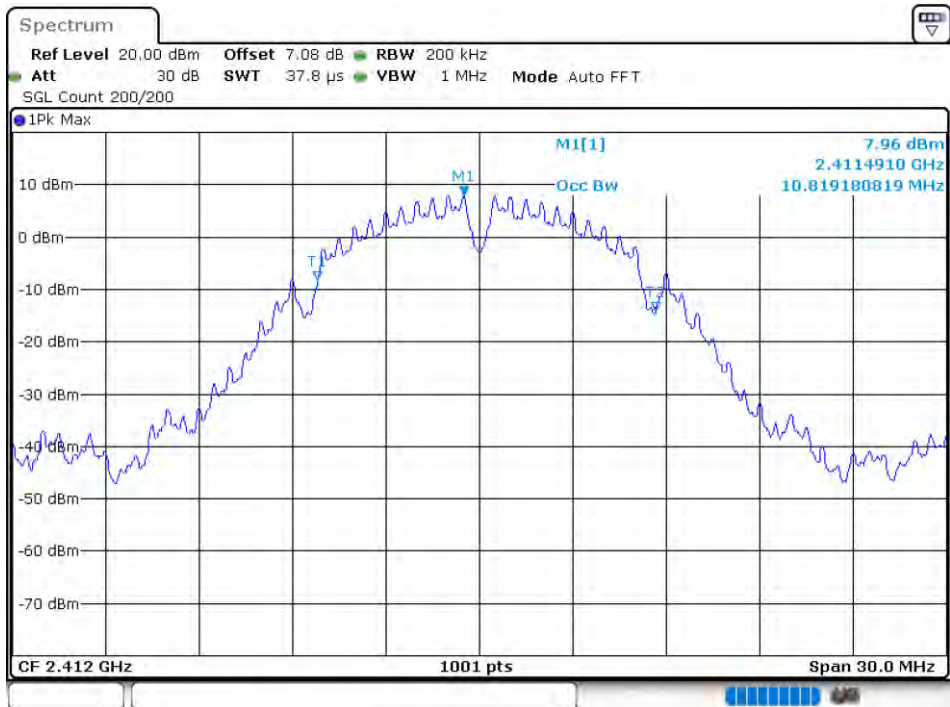


OBW NVNT b 2437MHz Ant 1

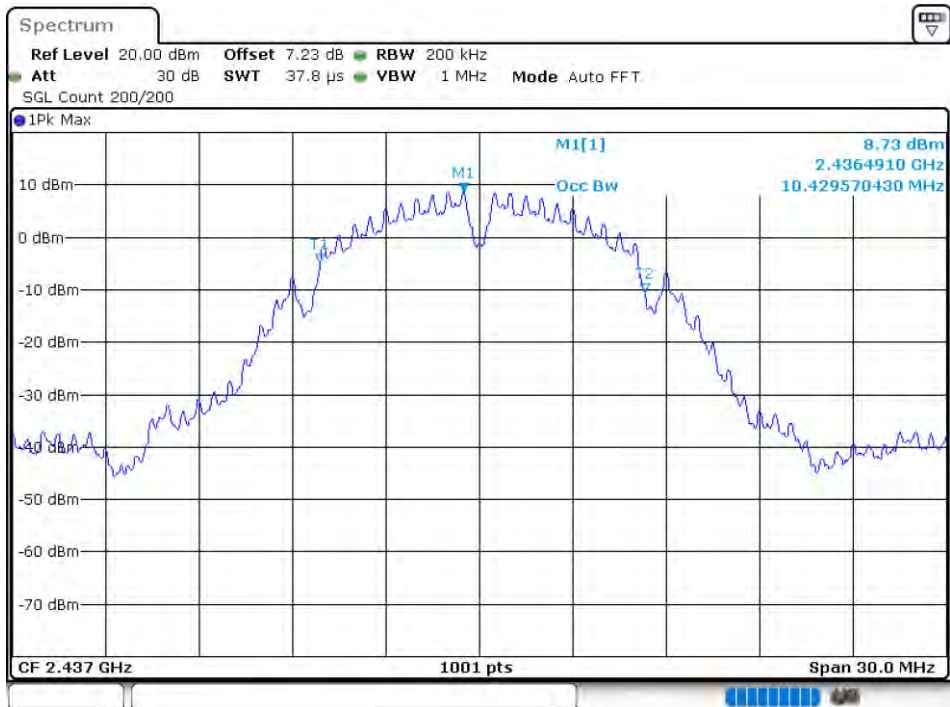


OBW NVNT b 2462MHz Ant 1

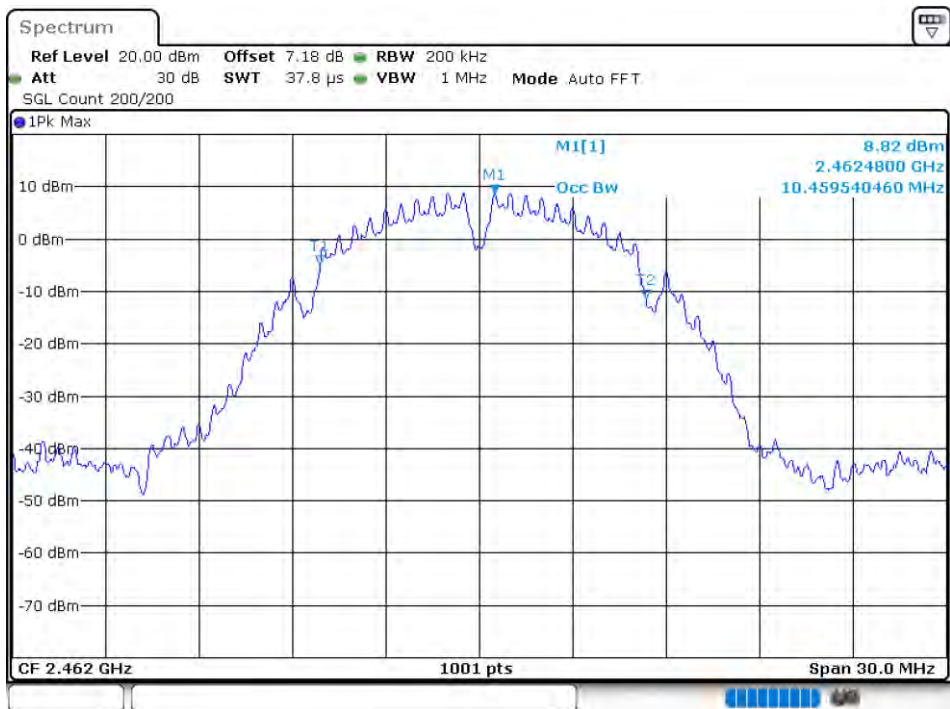


OBW NVNT b 2412MHz Ant 2

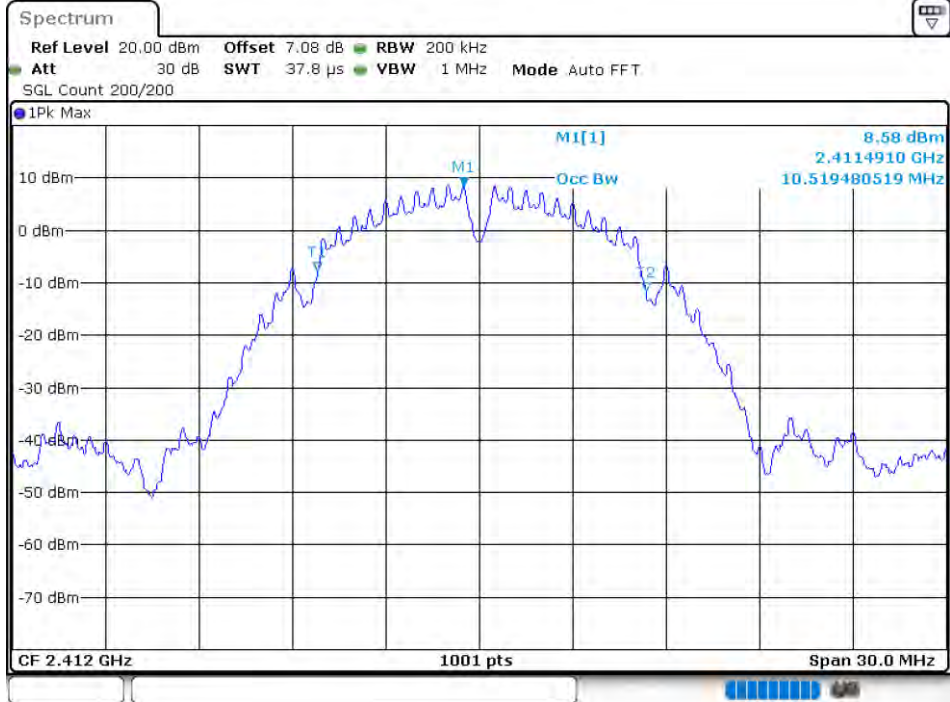


OBW NVNT b 2437MHz Ant 2

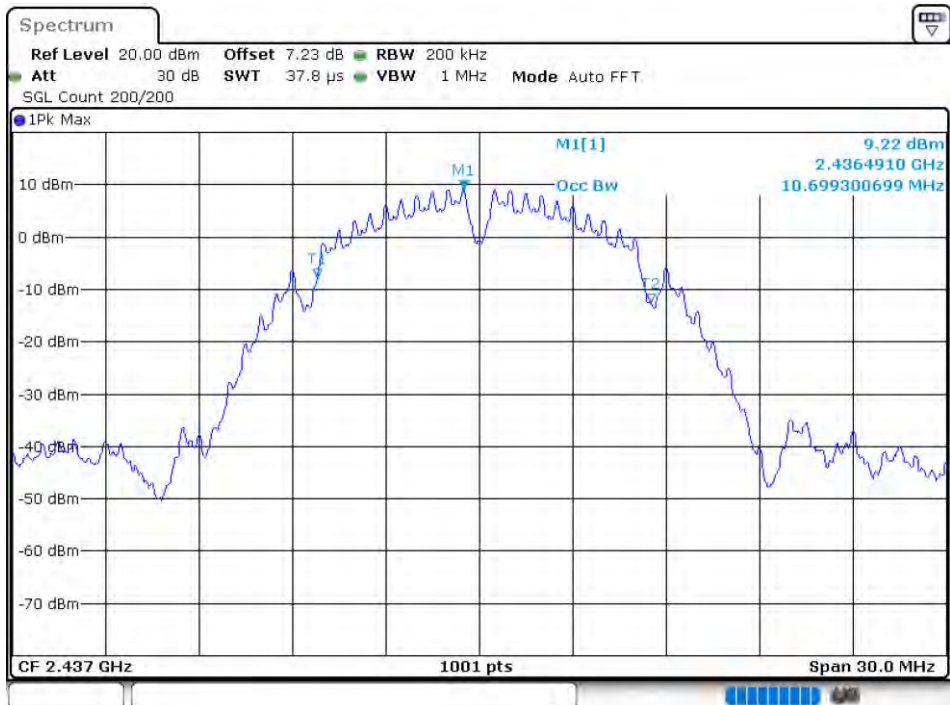


OBW NVNT b 2462MHz Ant 2

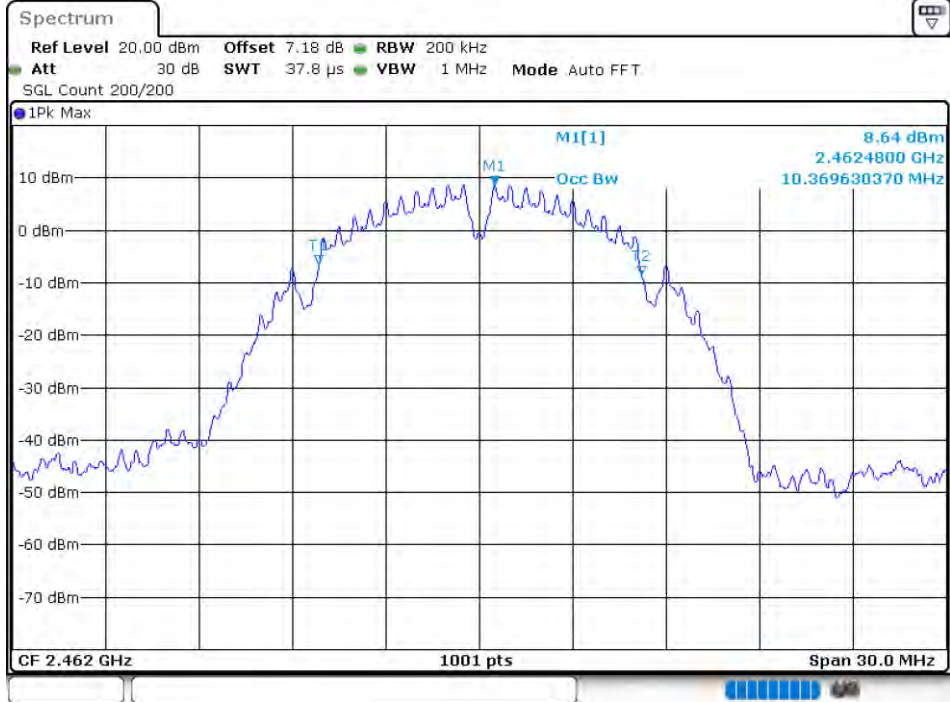


OBW NVNT g 2412MHz Ant 1

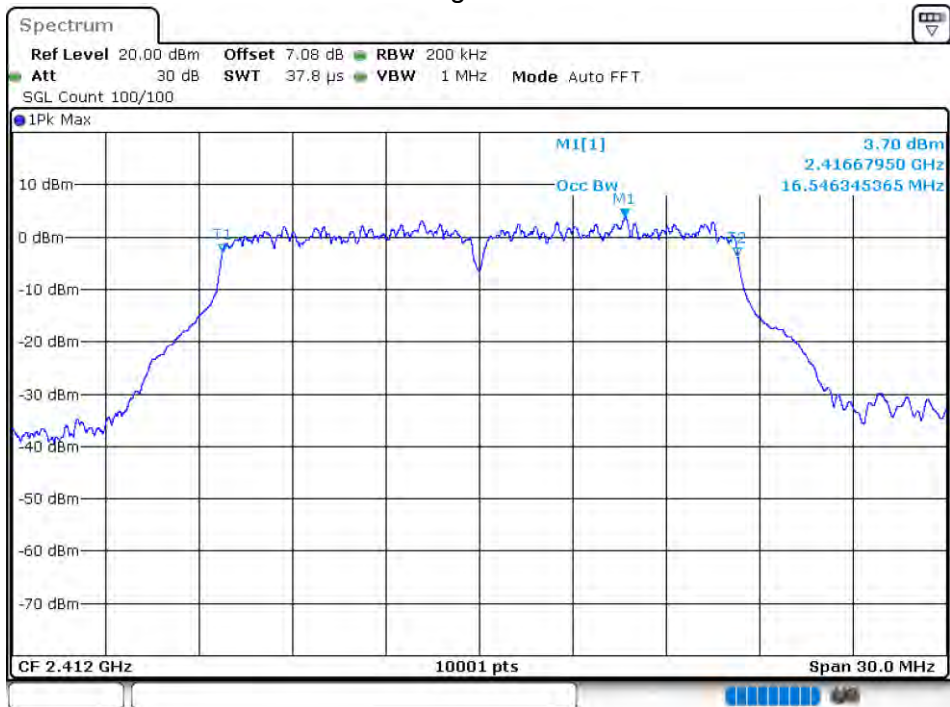


OBW NVNT g 2437MHz Ant 1

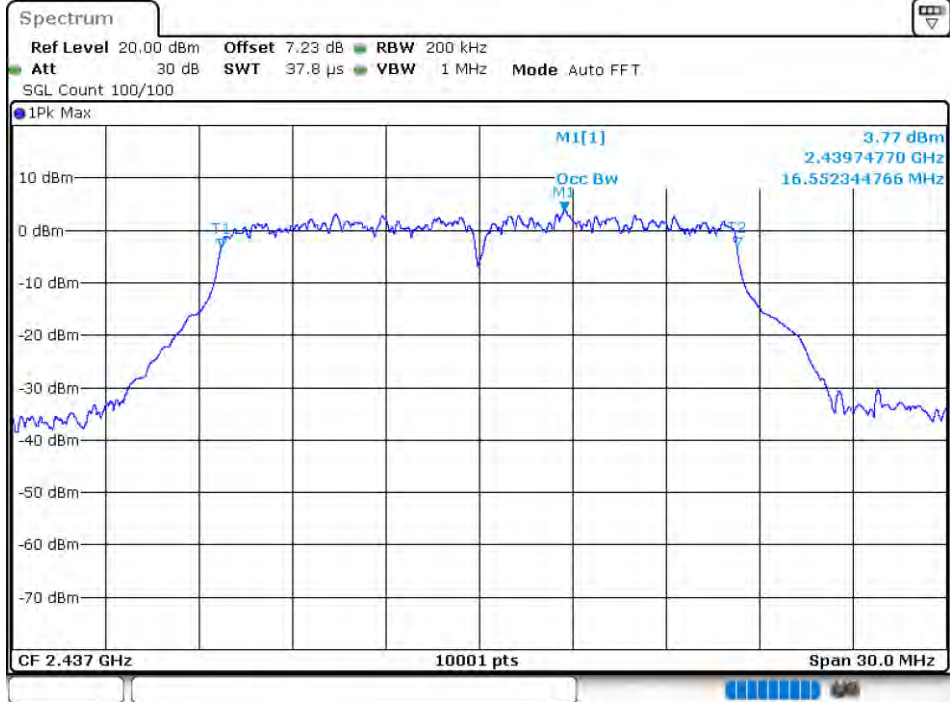


OBW NVNT g 2462MHz Ant 1

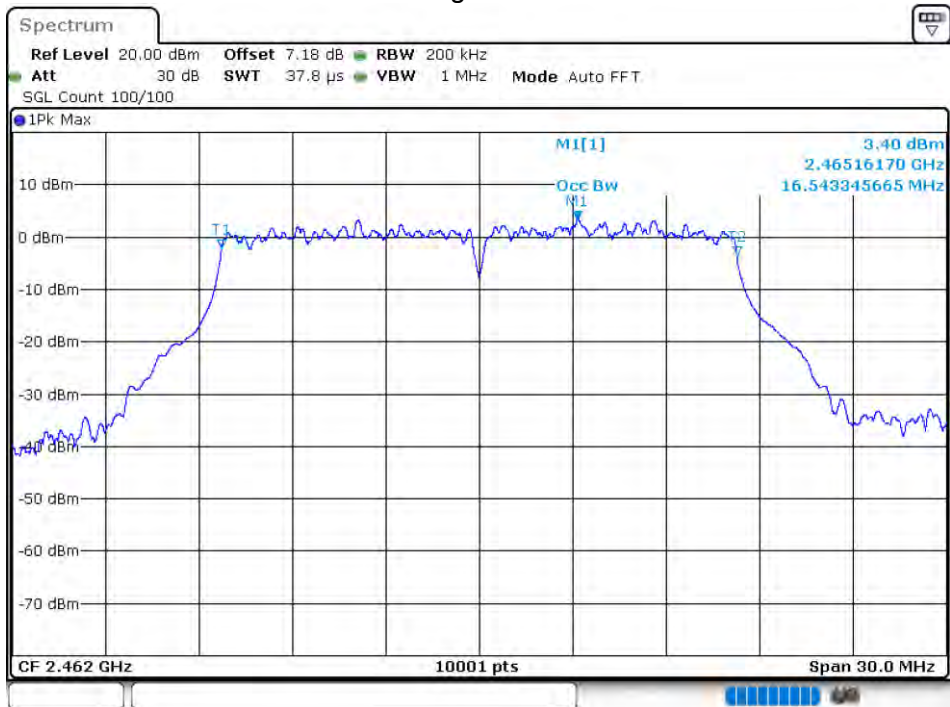


OBW NVNT g 2412MHz Ant 2

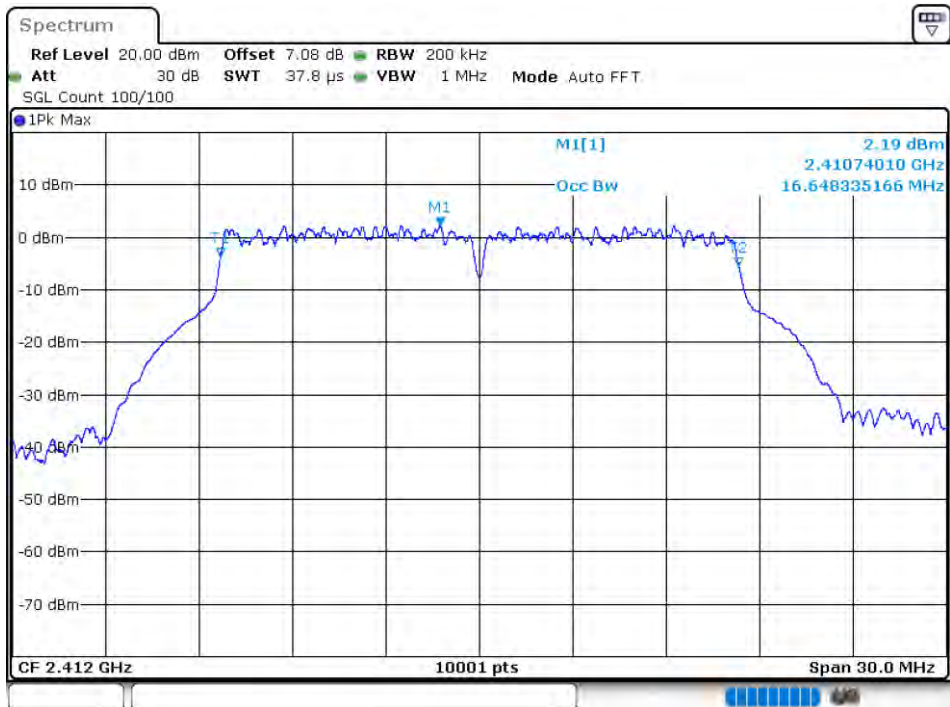


OBW NVNT g 2437MHz Ant 2

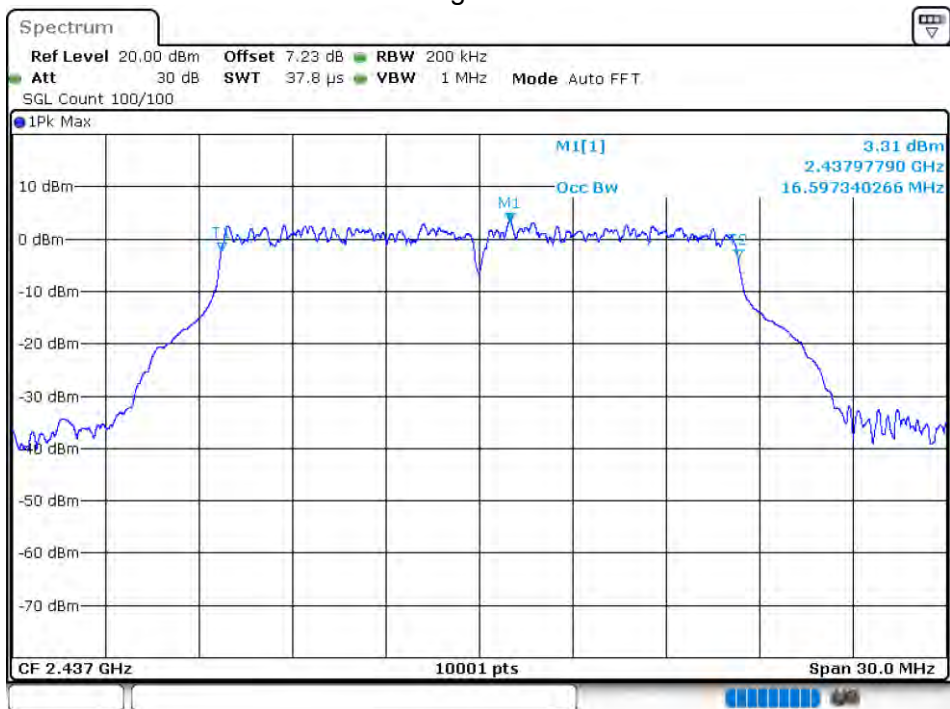


OBW NVNT g 2462MHz Ant 2

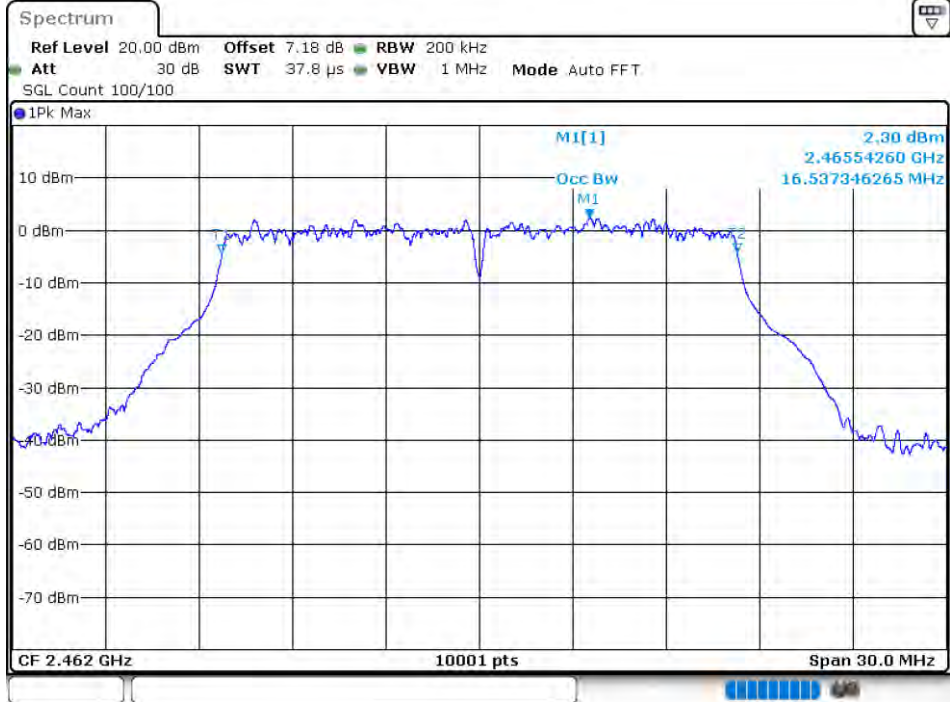


OBW NVNT n20 2412MHz Ant 1

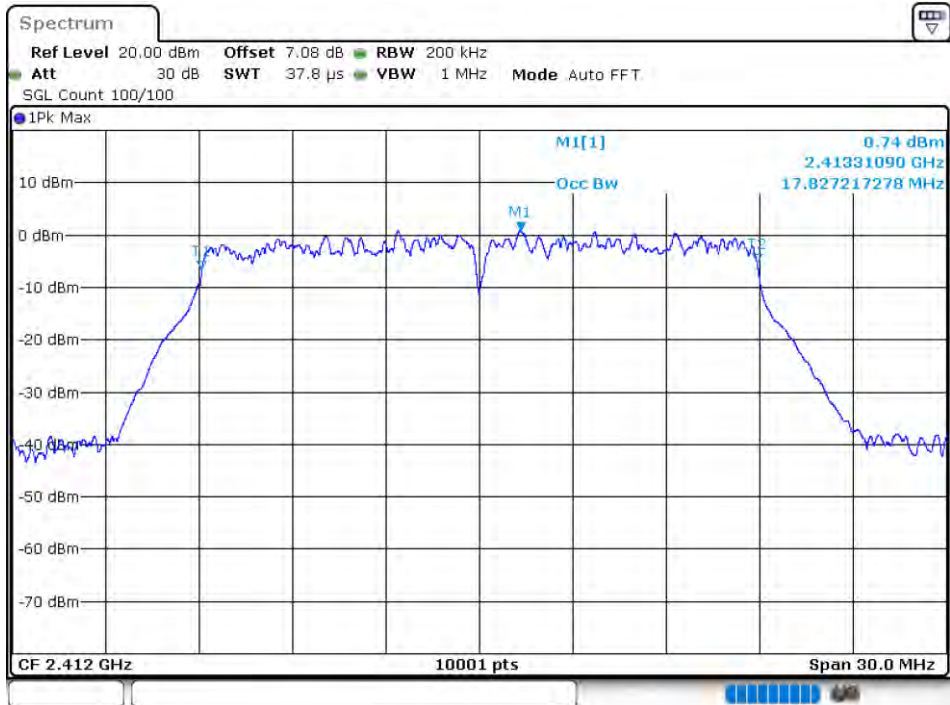


OBW NVNT n20 2437MHz Ant 1

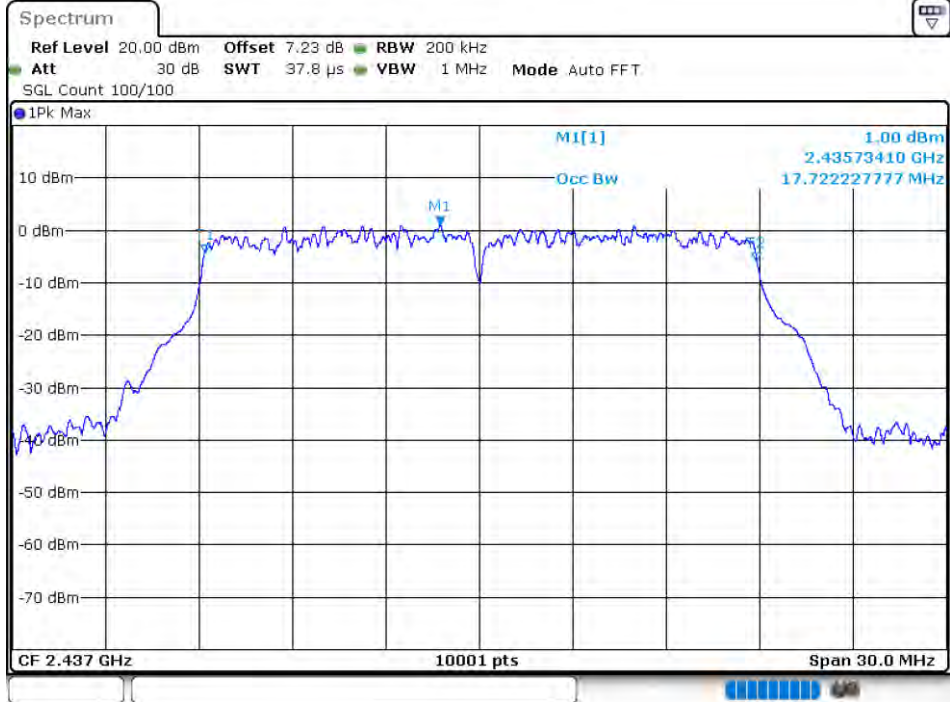


OBW NVNT n20 2462MHz Ant 1

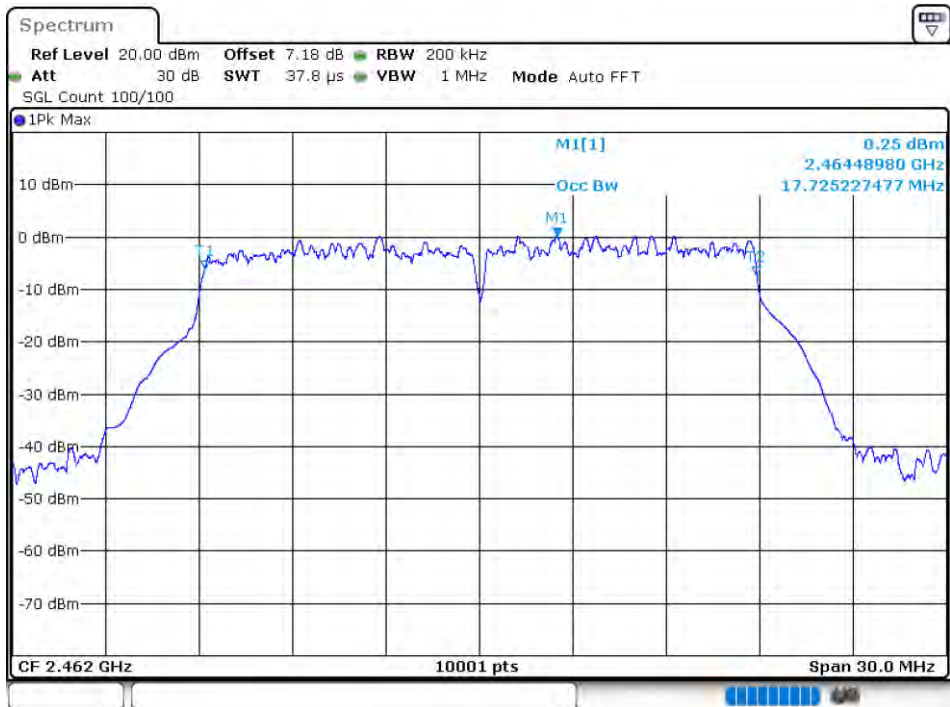


OBW NVNT n20 2412MHz Ant 2

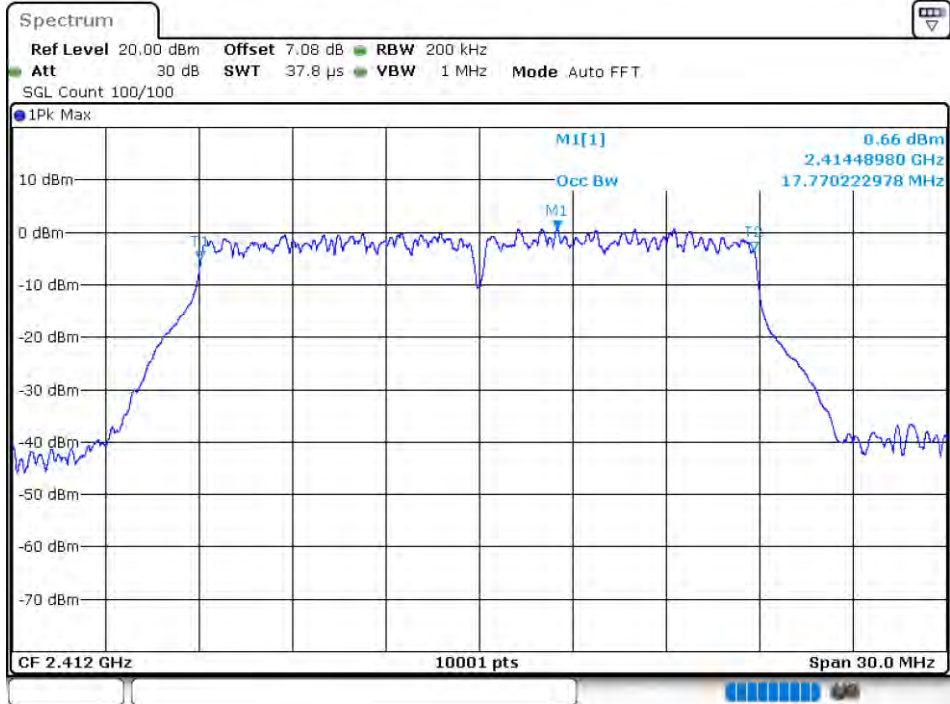

OBW NVNT n20 2437MHz Ant 2

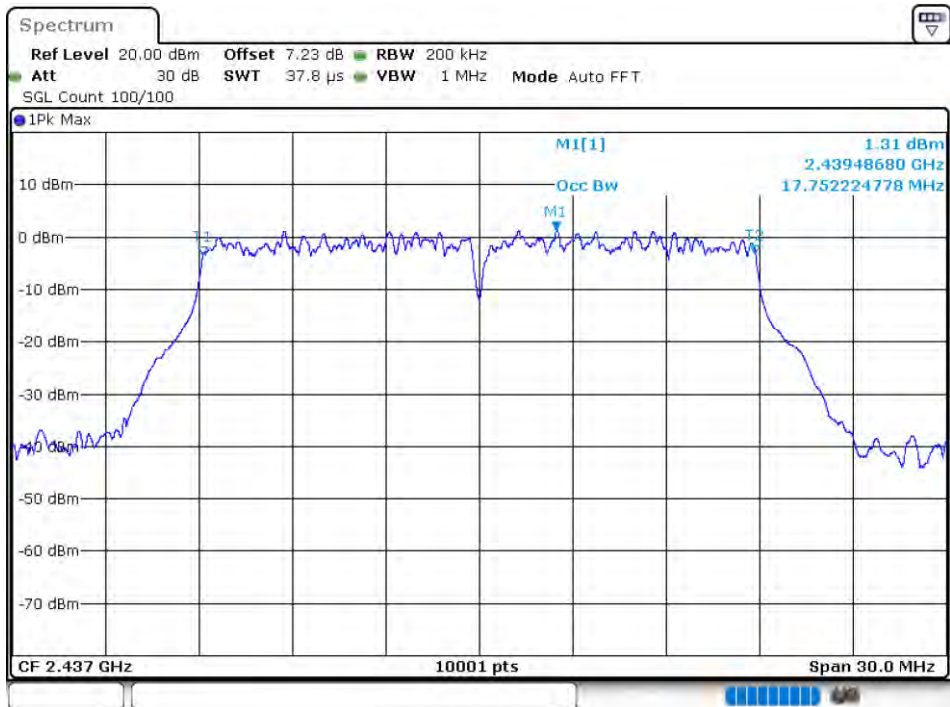


OBW NVNT n20 2462MHz Ant 2

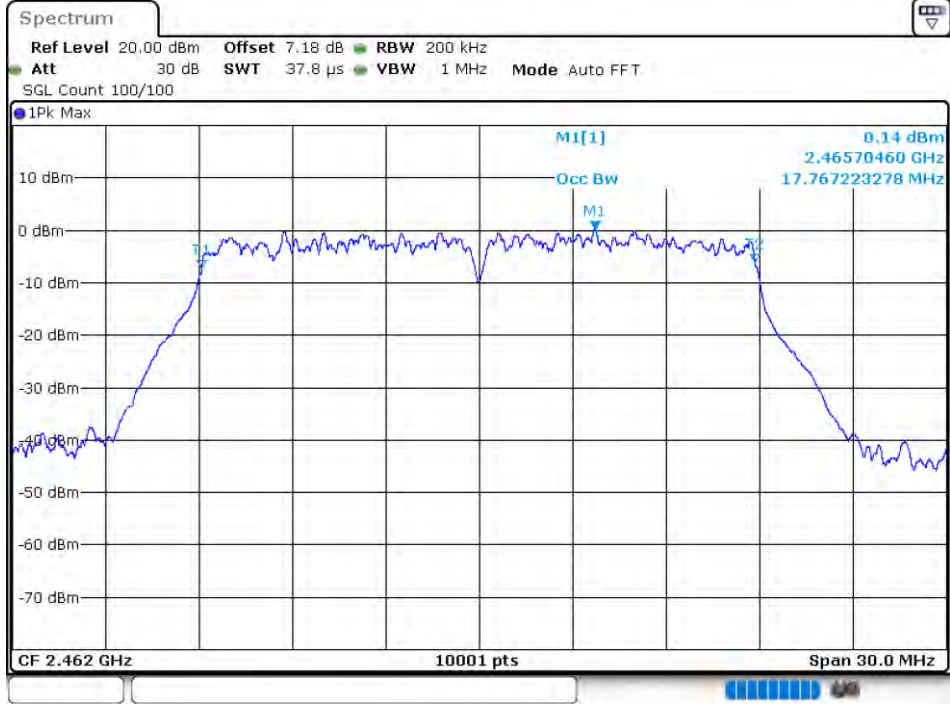


8.1.4 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	ax20	2412	Ant 1	-16.51	8	Pass
NVNT	ax20	2437	Ant 1	-16.29	8	Pass
NVNT	ax20	2462	Ant 1	-15.64	8	Pass
NVNT	ax20	2412	Ant 2	-15.57	8	Pass
NVNT	ax20	2437	Ant 2	-14.58	8	Pass
NVNT	ax20	2462	Ant 2	-15.73	8	Pass
NVNT	b	2412	Ant 1	-6.07	8	Pass
NVNT	b	2437	Ant 1	-5.18	8	Pass
NVNT	b	2462	Ant 1	-5.46	8	Pass
NVNT	b	2412	Ant 2	-6.29	8	Pass
NVNT	b	2437	Ant 2	-4.53	8	Pass
NVNT	b	2462	Ant 2	-5.76	8	Pass
NVNT	g	2412	Ant 1	-11.62	8	Pass
NVNT	g	2437	Ant 1	-11.3	8	Pass
NVNT	g	2462	Ant 1	-11.04	8	Pass
NVNT	g	2412	Ant 2	-12.38	8	Pass
NVNT	g	2437	Ant 2	-11.22	8	Pass
NVNT	g	2462	Ant 2	-12.21	8	Pass
NVNT	n20	2412	Ant 1	-14.7	8	Pass
NVNT	n20	2437	Ant 1	-14.02	8	Pass
NVNT	n20	2462	Ant 1	-14.89	8	Pass
NVNT	n20	2412	Ant 2	-14.21	8	Pass
NVNT	n20	2437	Ant 2	-14.4	8	Pass
NVNT	n20	2462	Ant 2	-15.29	8	Pass


PSD NVNT ax20 2412MHz Ant 1

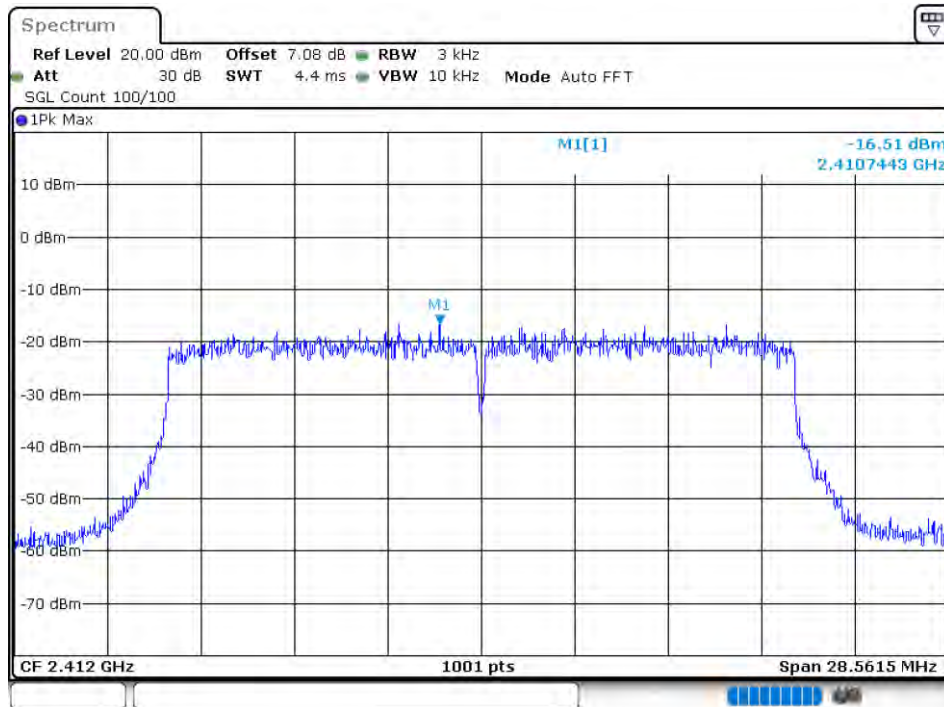


PSD NVNT ax20 2437MHz Ant 1

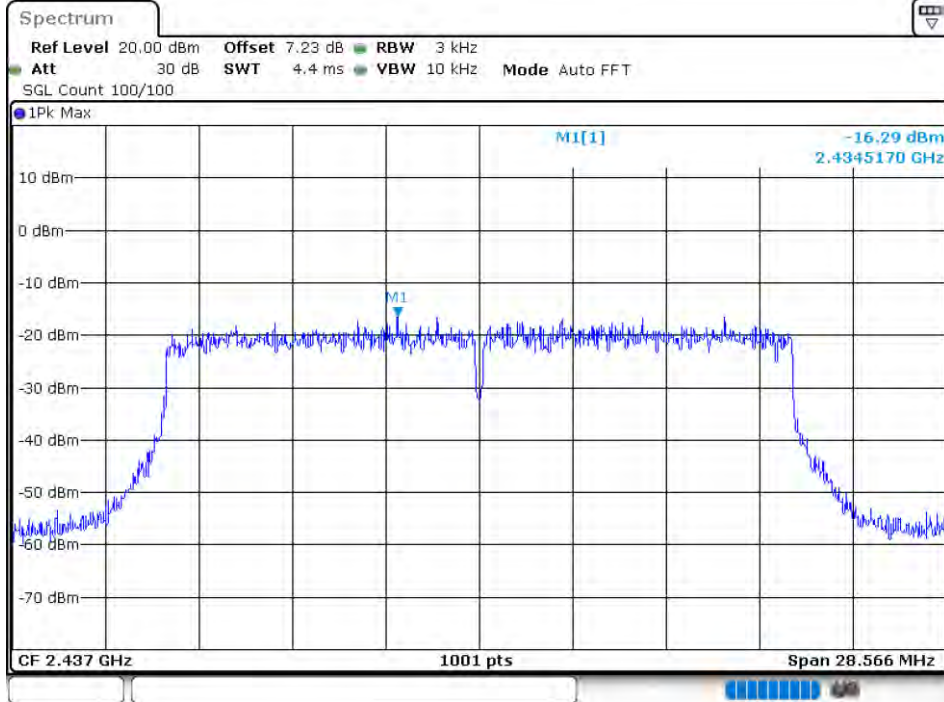


PSD NVNT ax20 2462MHz Ant 1

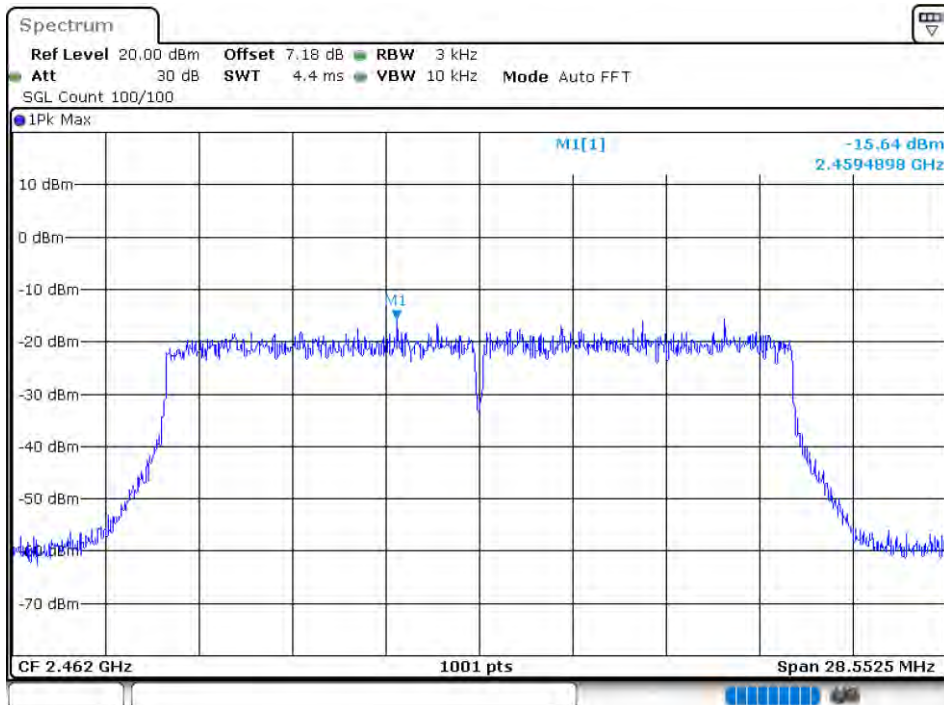


PSD NVNT ax20 2412MHz Ant 2

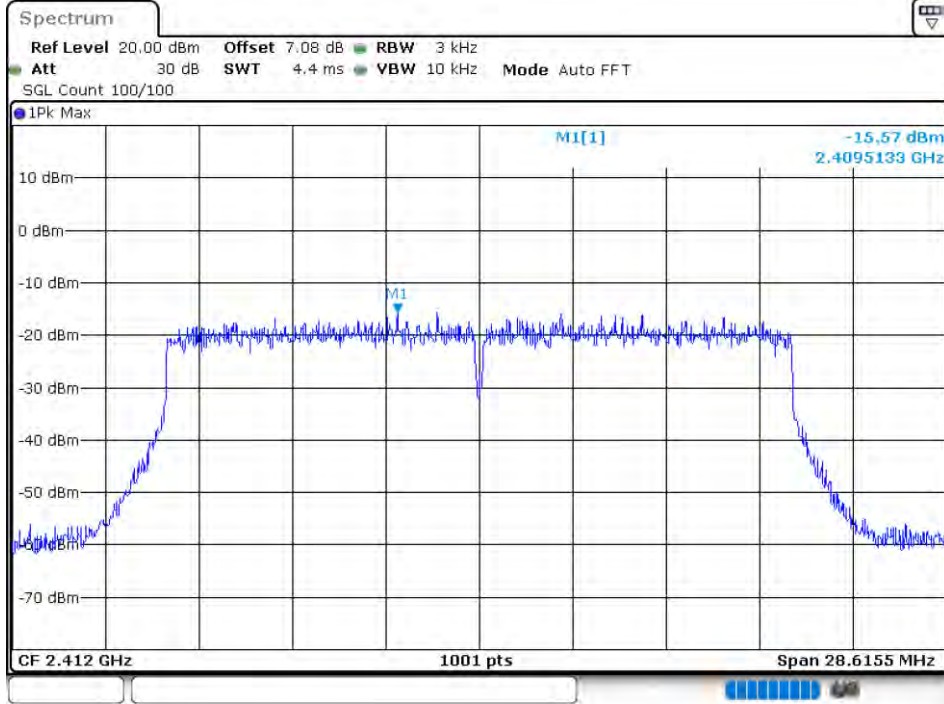


PSD NVNT ax20 2437MHz Ant 2

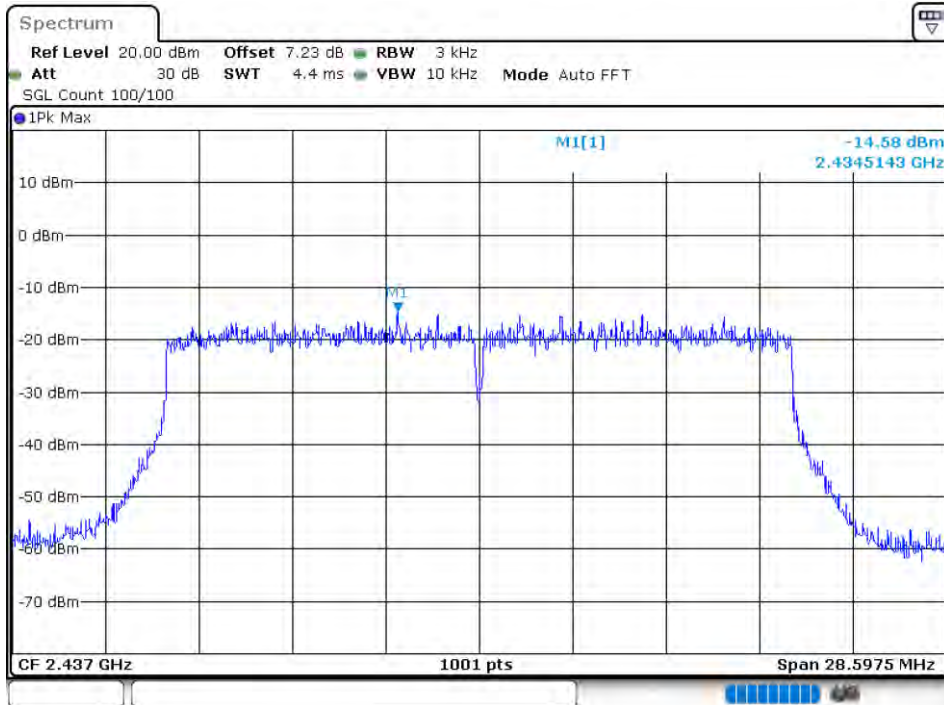


PSD NVNT ax20 2462MHz Ant 2

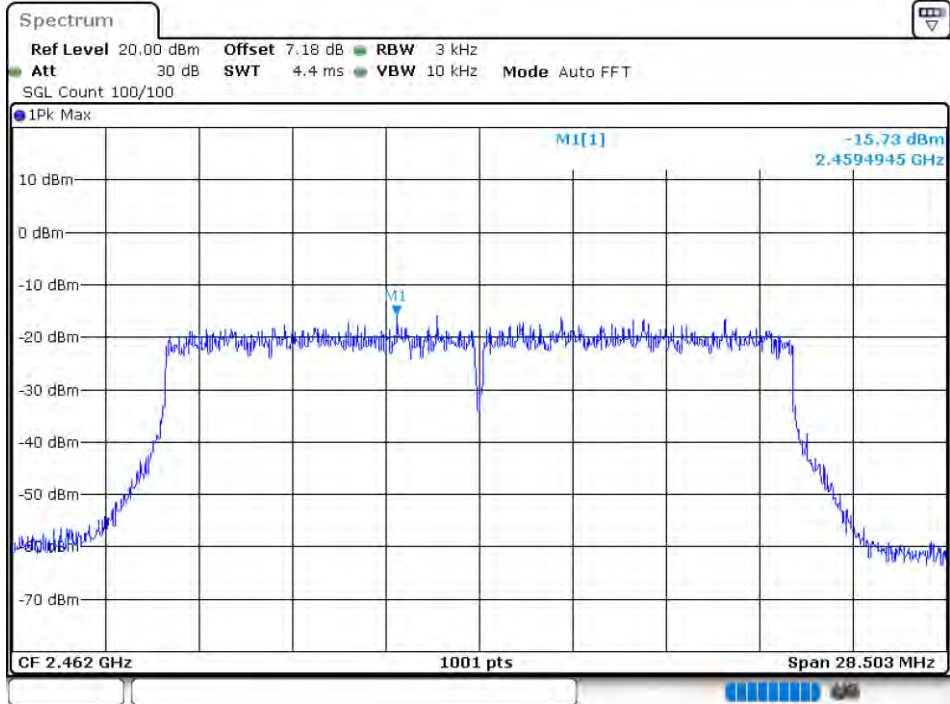


PSD NVNT b 2412MHz Ant 1

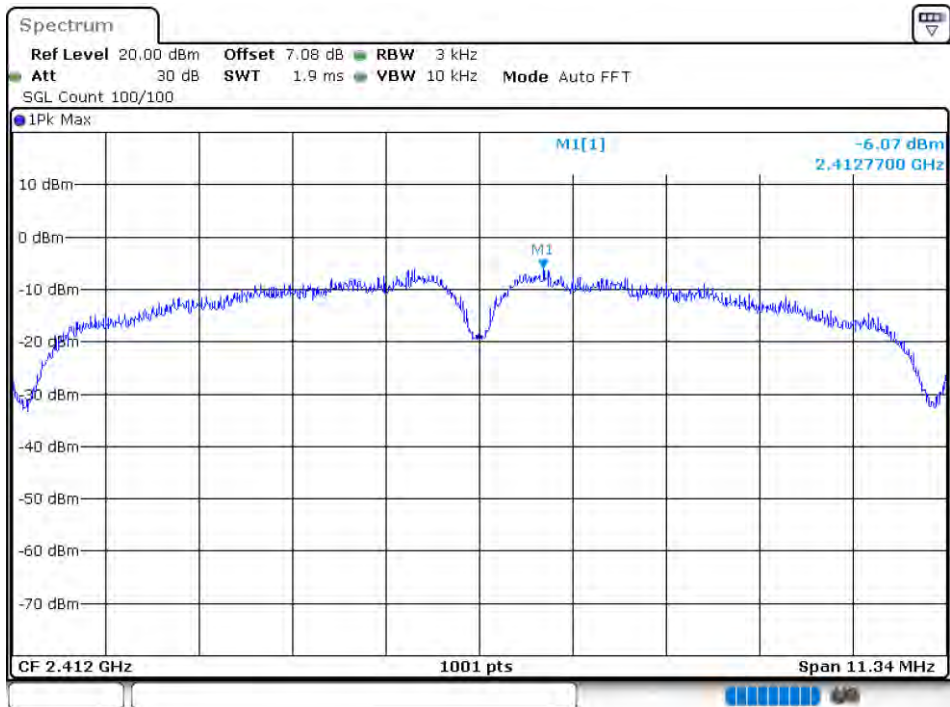


PSD NVNT b 2437MHz Ant 1

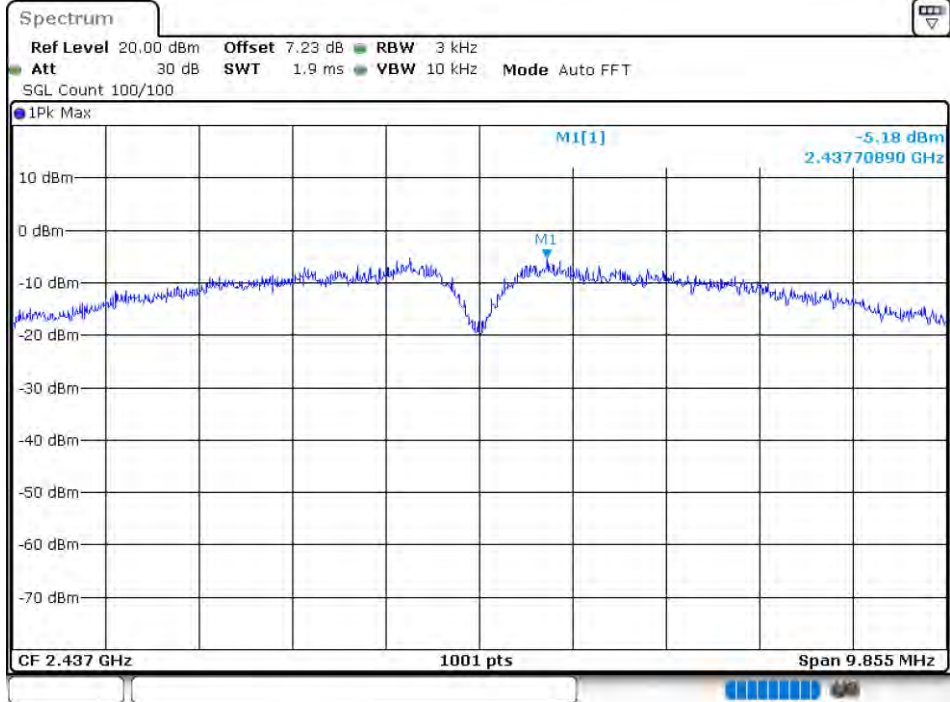


PSD NVNT b 2462MHz Ant 1

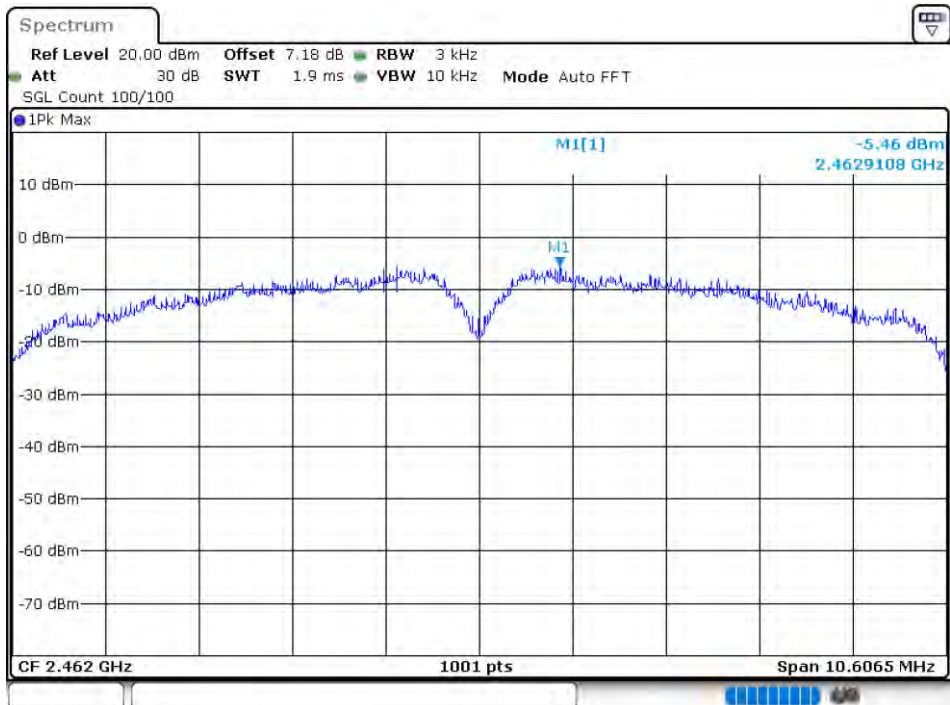


PSD NVNT b 2412MHz Ant 2

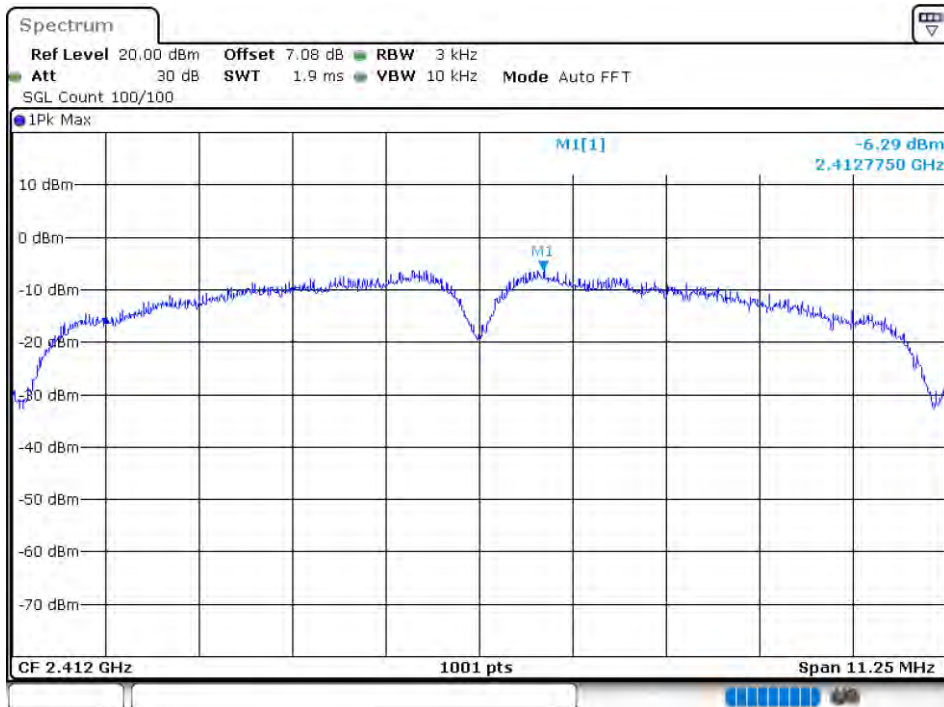


PSD NVNT b 2437MHz Ant 2

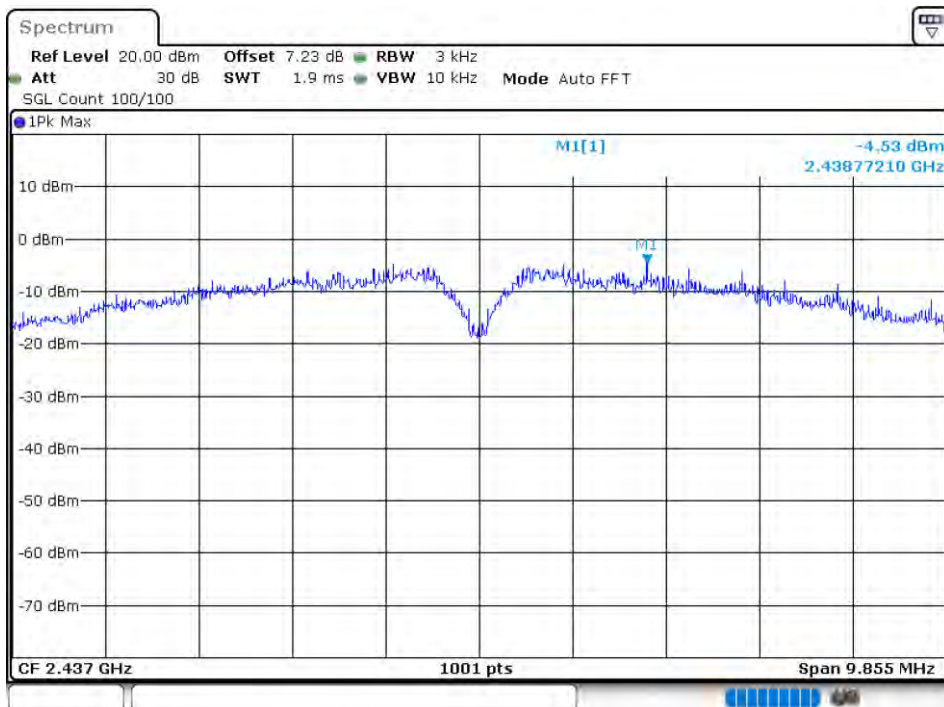


PSD NVNT b 2462MHz Ant 2

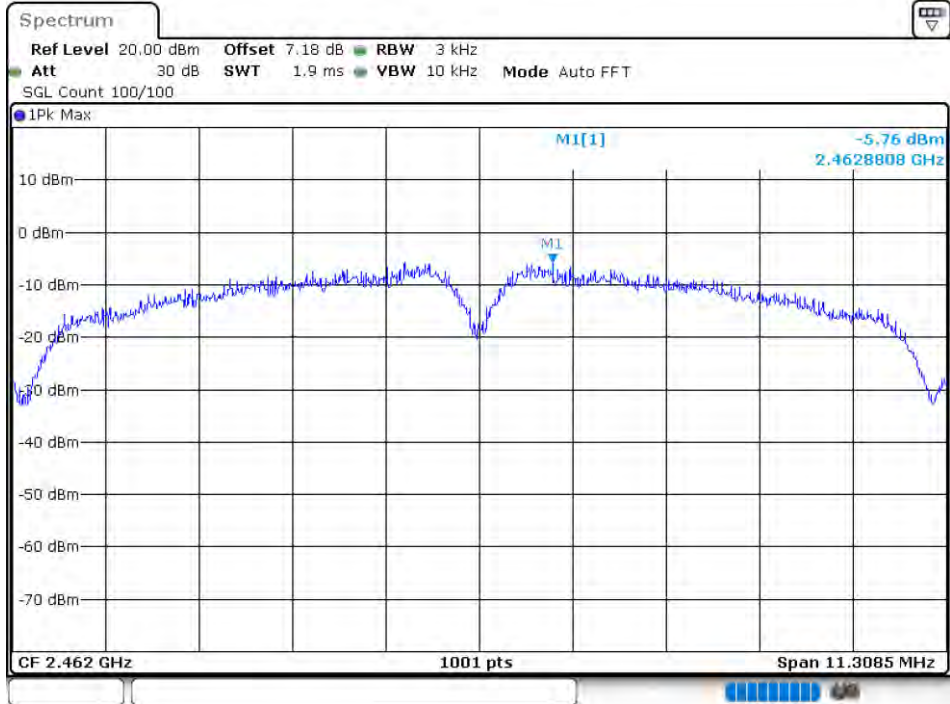


PSD NVNT g 2412MHz Ant 1

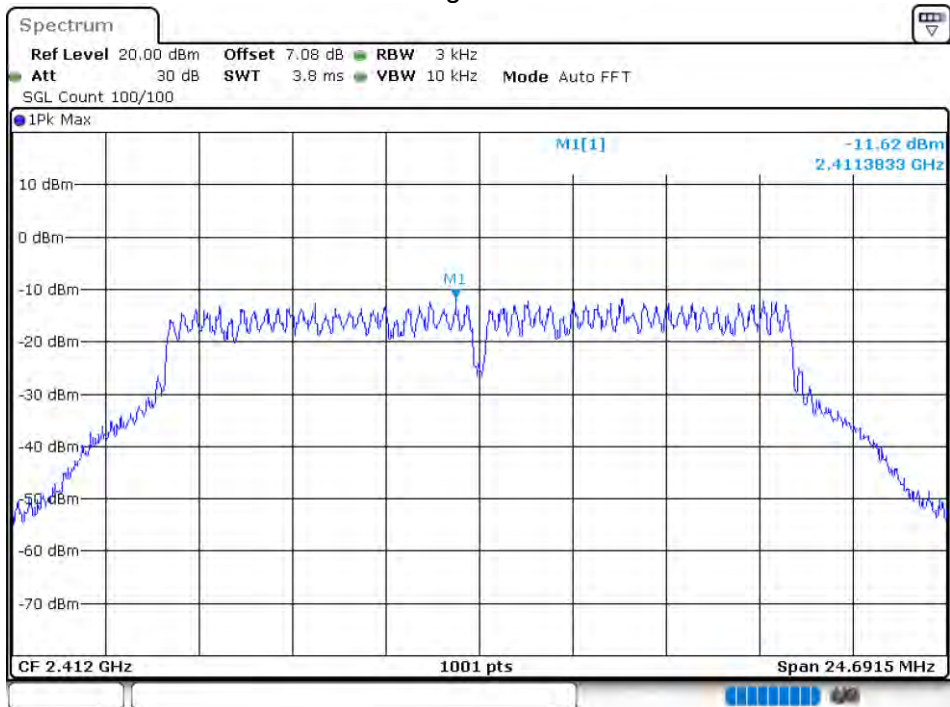


PSD NVNT g 2437MHz Ant 1

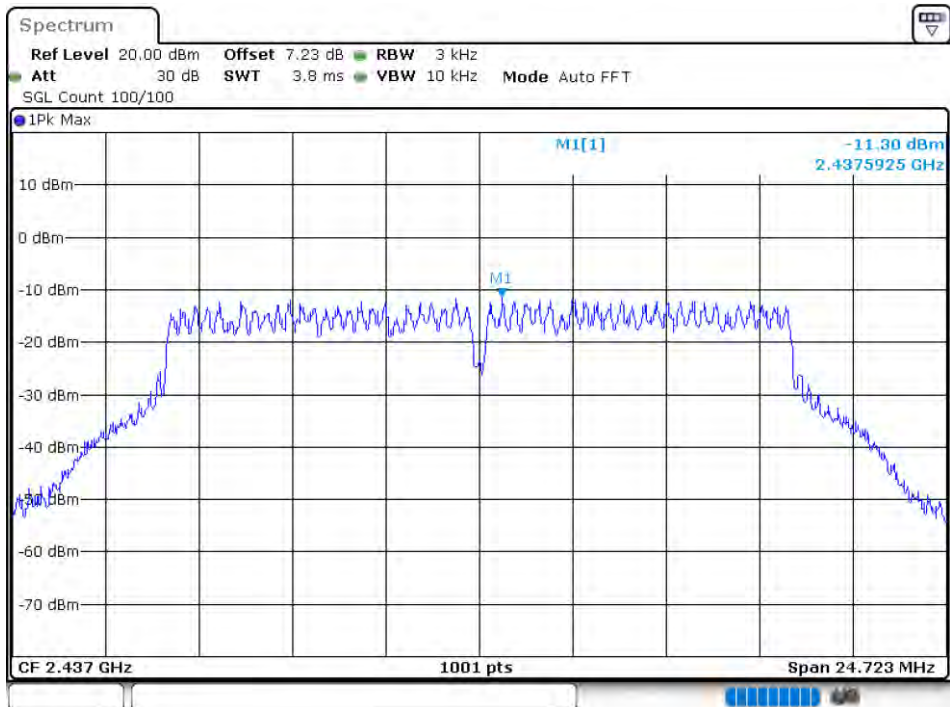


PSD NVNT g 2462MHz Ant 1

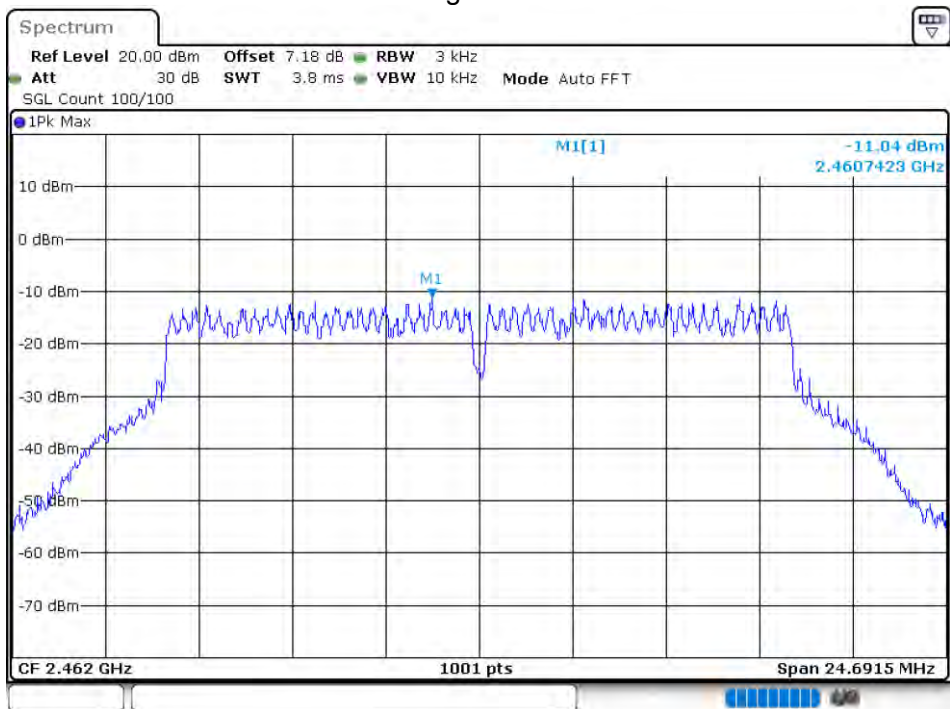


PSD NVNT g 2412MHz Ant 2

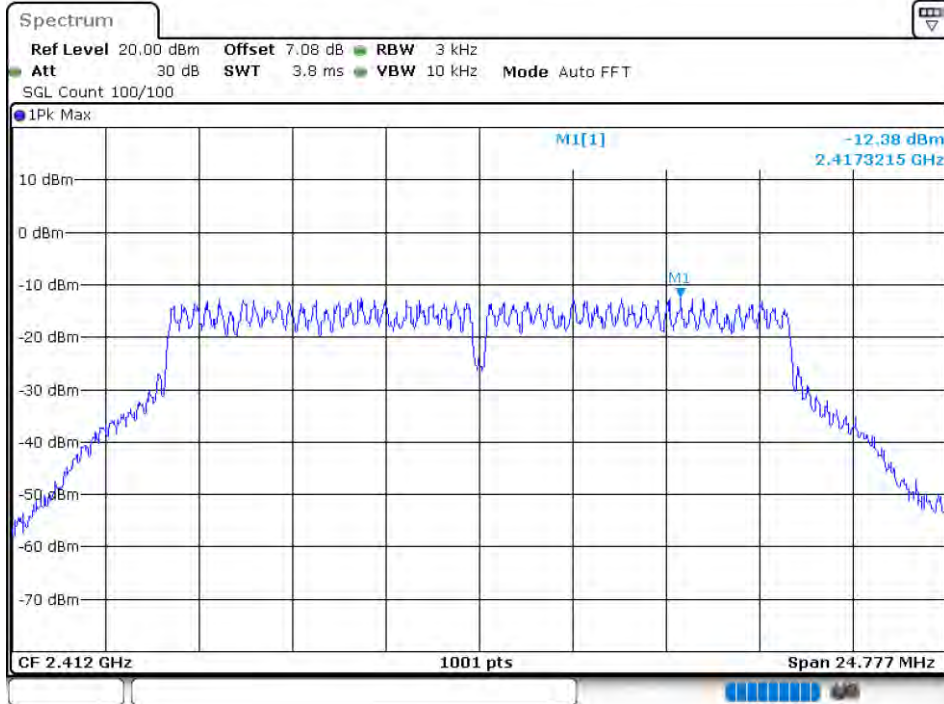


PSD NVNT g 2437MHz Ant 2

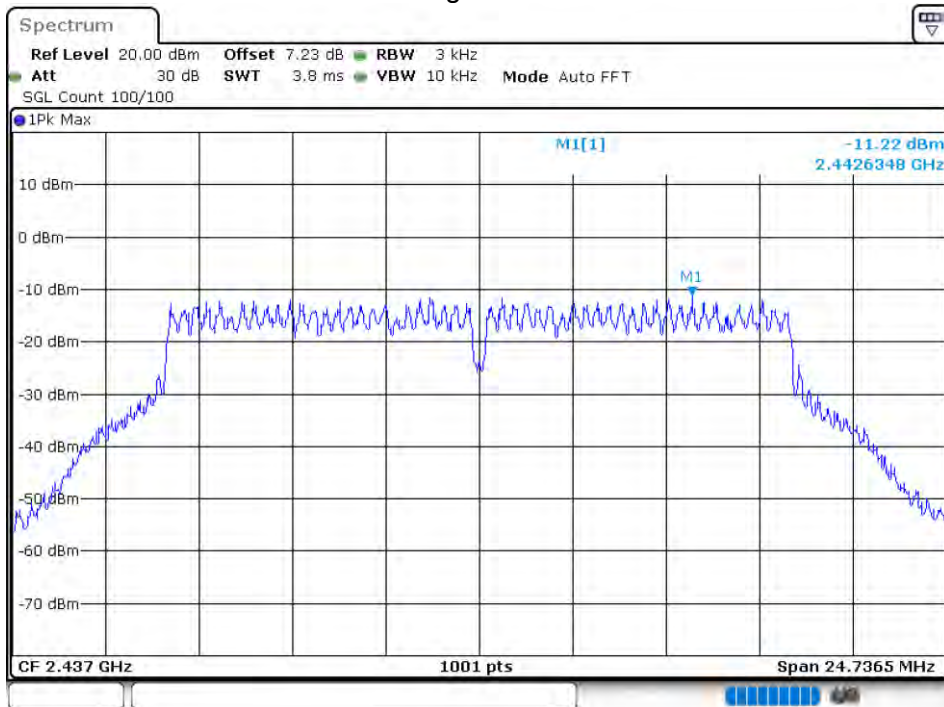


PSD NVNT g 2462MHz Ant 2

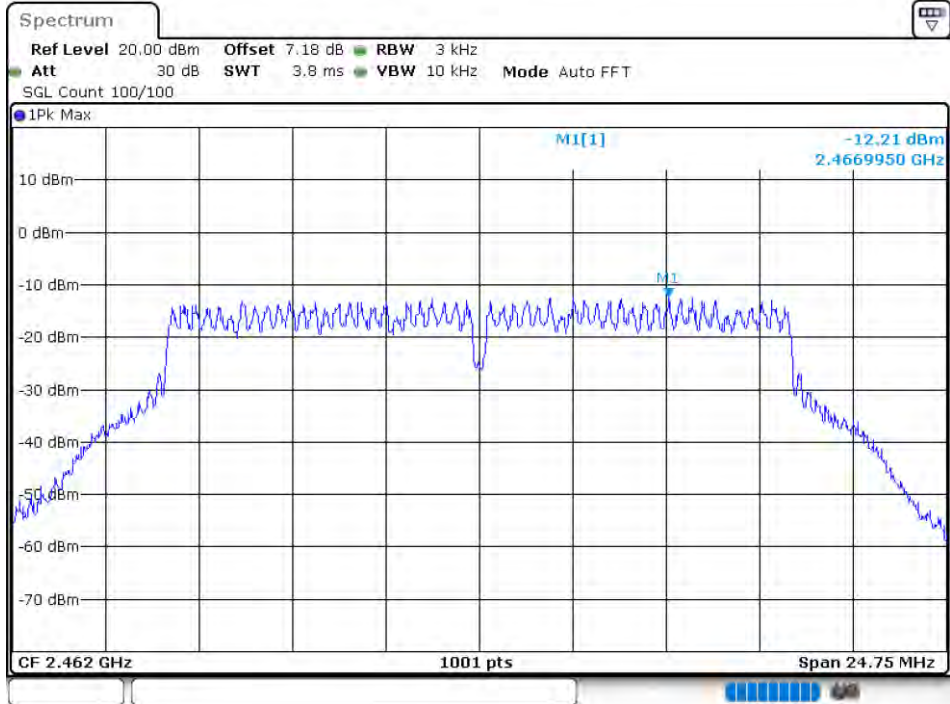


PSD NVNT n20 2412MHz Ant 1

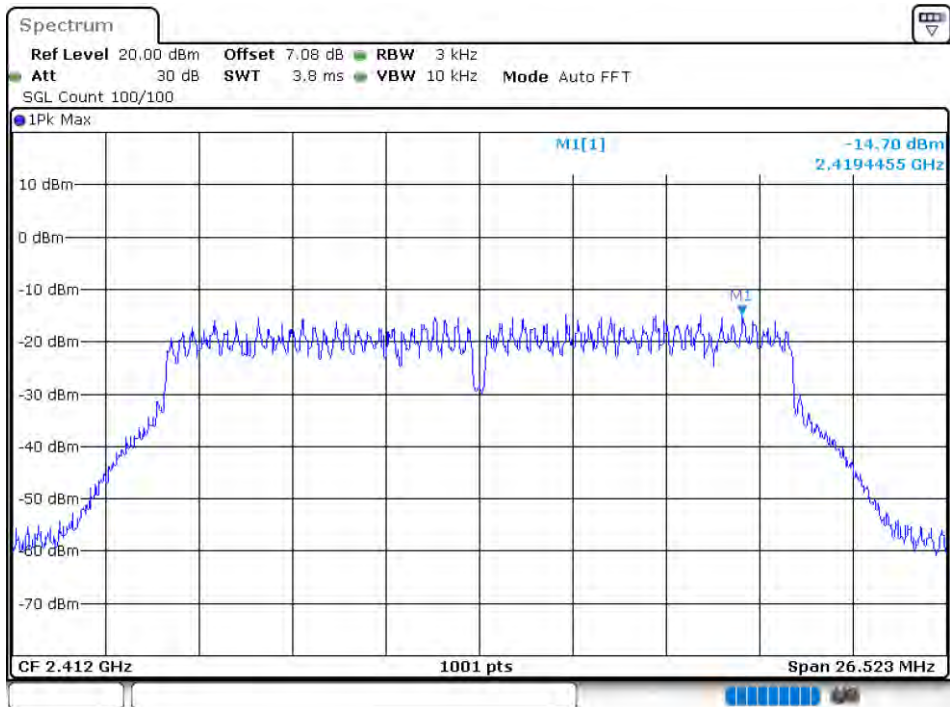


PSD NVNT n20 2437MHz Ant 1

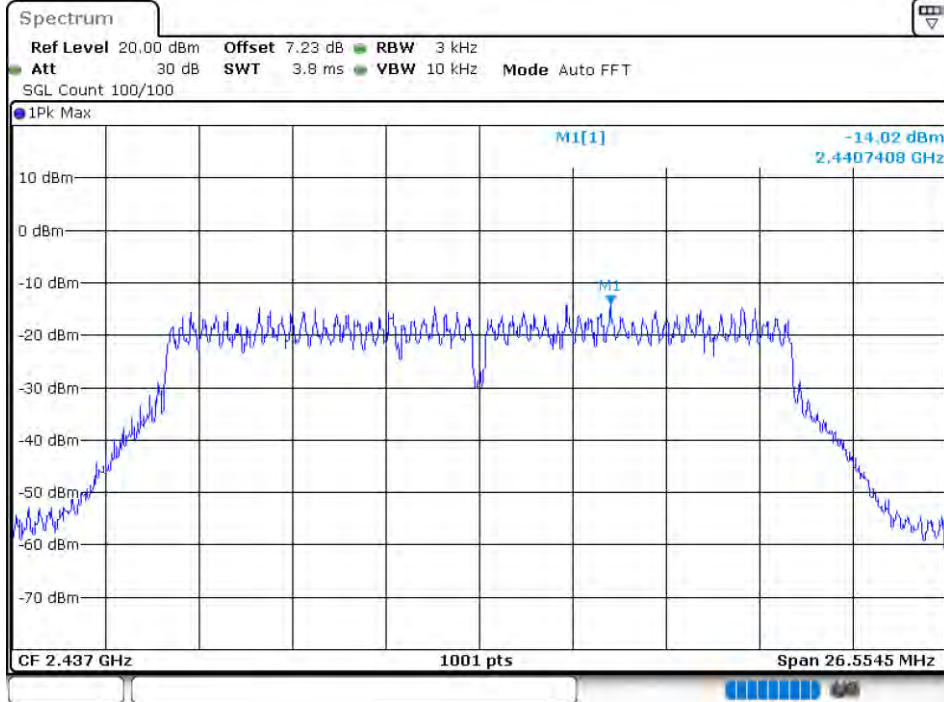


PSD NVNT n20 2462MHz Ant 1

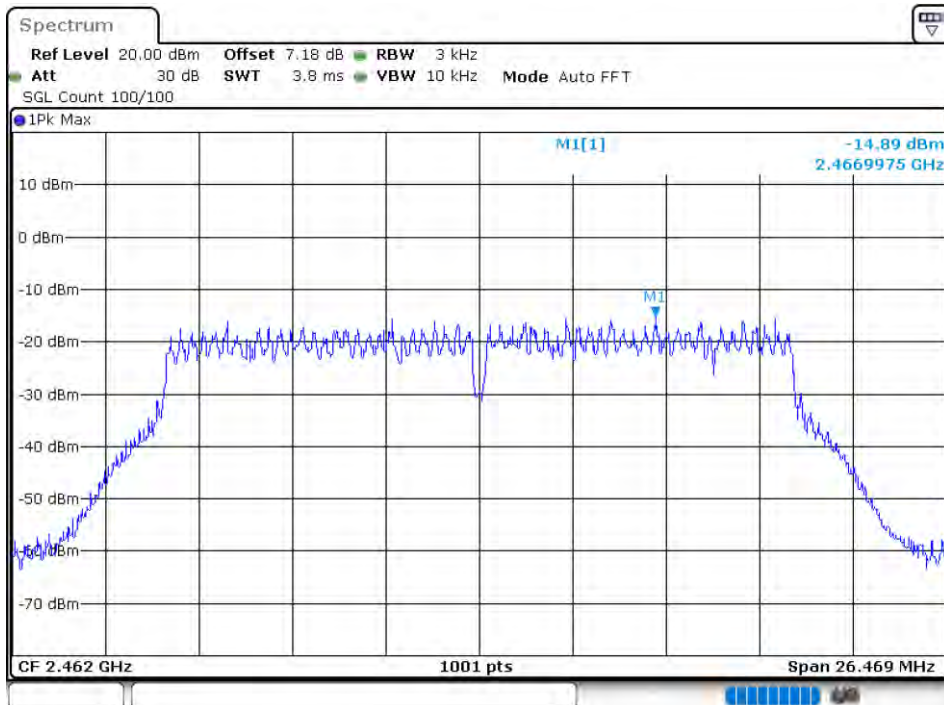


PSD NVNT n20 2412MHz Ant 2

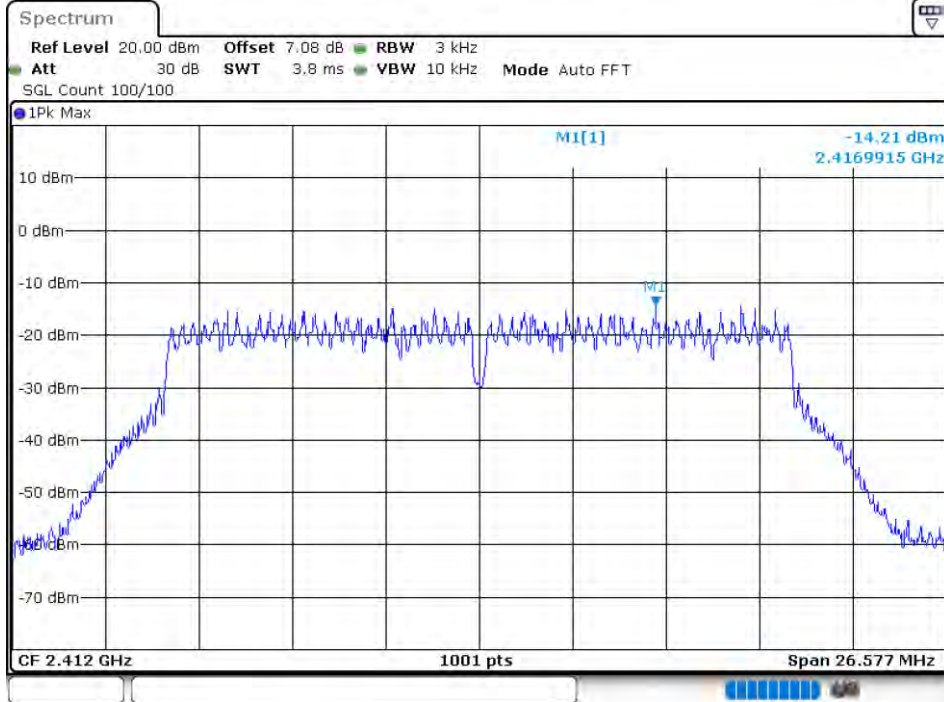

PSD NVNT n20 2437MHz Ant 2

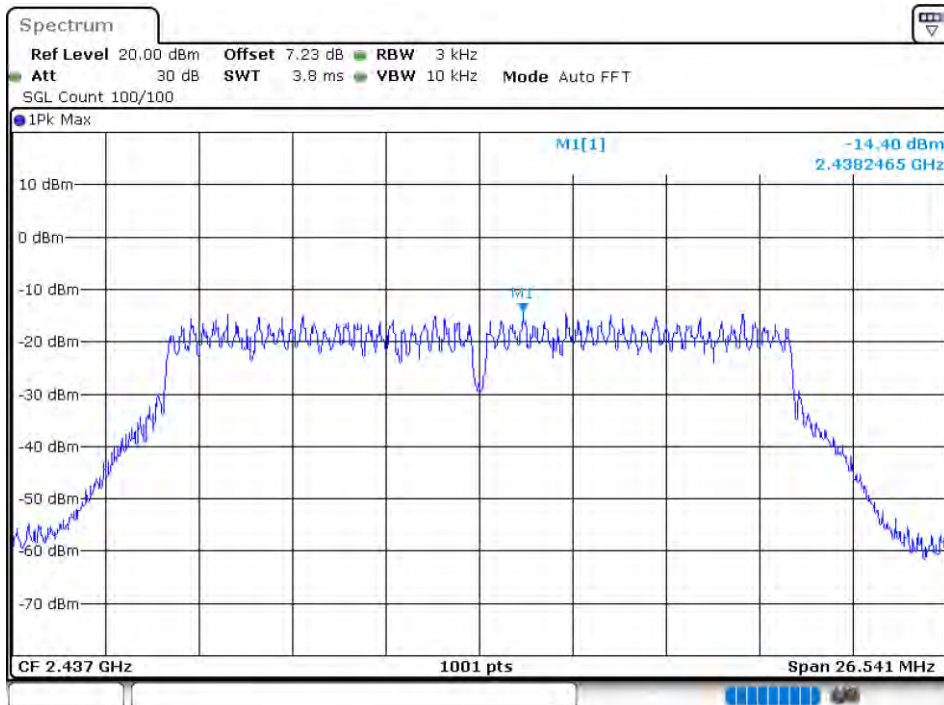


PSD NVNT n20 2462MHz Ant 2

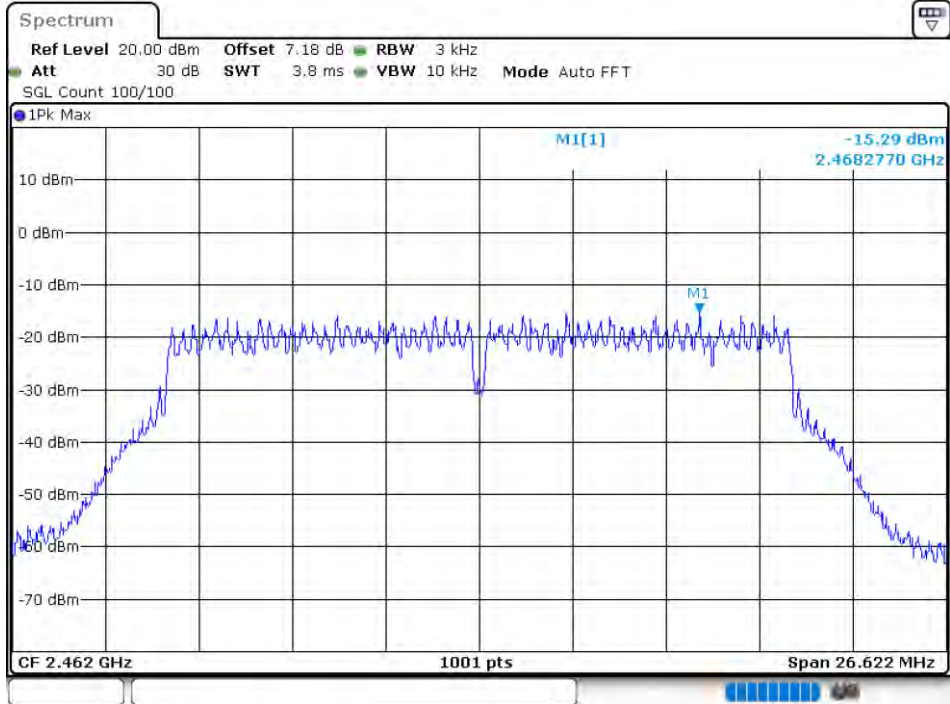


8.1.5 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ax20	2412	Ant 1	-46	-20	Pass
NVNT	ax20	2462	Ant 1	-42.34	-20	Pass
NVNT	ax20	2412	Ant 2	-46.7	-20	Pass
NVNT	ax20	2462	Ant 2	-46.85	-20	Pass
NVNT	b	2412	Ant 1	-49.86	-20	Pass
NVNT	b	2462	Ant 1	-57.4	-20	Pass
NVNT	b	2412	Ant 2	-49.54	-20	Pass
NVNT	b	2462	Ant 2	-58.63	-20	Pass
NVNT	g	2412	Ant 1	-46.44	-20	Pass
NVNT	g	2462	Ant 1	-45.18	-20	Pass
NVNT	g	2412	Ant 2	-46.93	-20	Pass
NVNT	g	2462	Ant 2	-47.73	-20	Pass
NVNT	n20	2412	Ant 1	-49.86	-20	Pass
NVNT	n20	2462	Ant 1	-47.5	-20	Pass
NVNT	n20	2412	Ant 2	-48.11	-20	Pass
NVNT	n20	2462	Ant 2	-48.68	-20	Pass


Band Edge NVNT ax20 2412MHz Ant 1 Ref

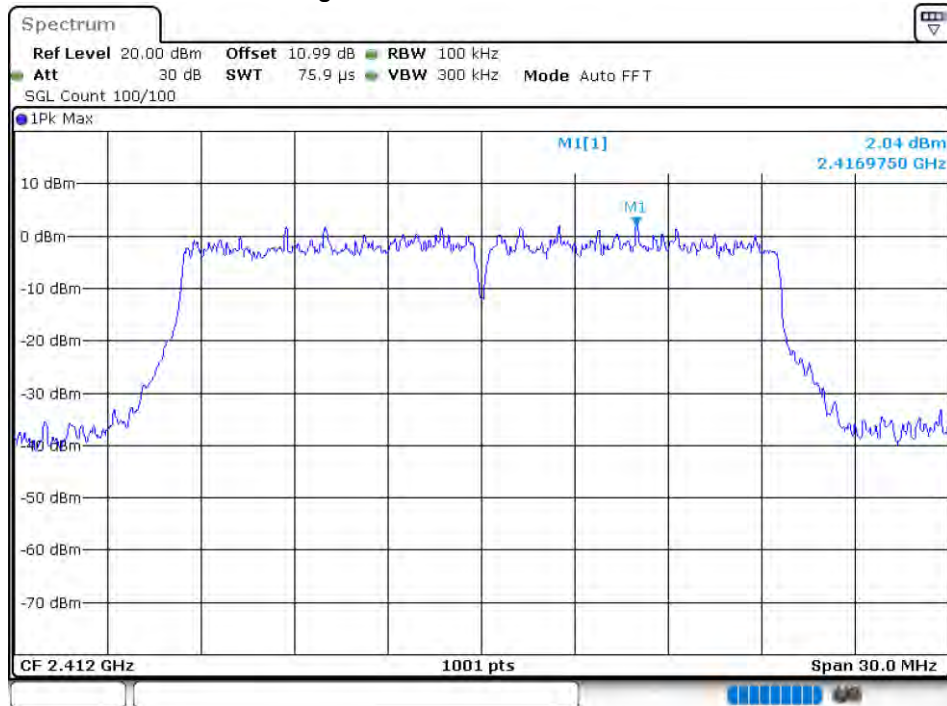


Band Edge NVNT ax20 2412MHz Ant 1 Emission

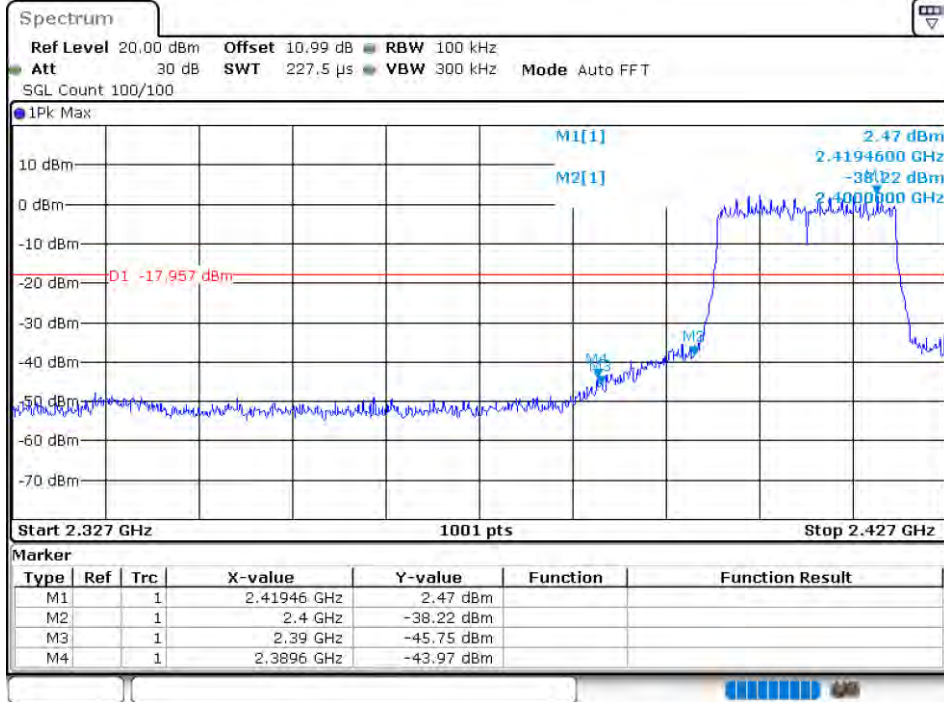


Band Edge NVNT ax20 2462MHz Ant 1 Ref

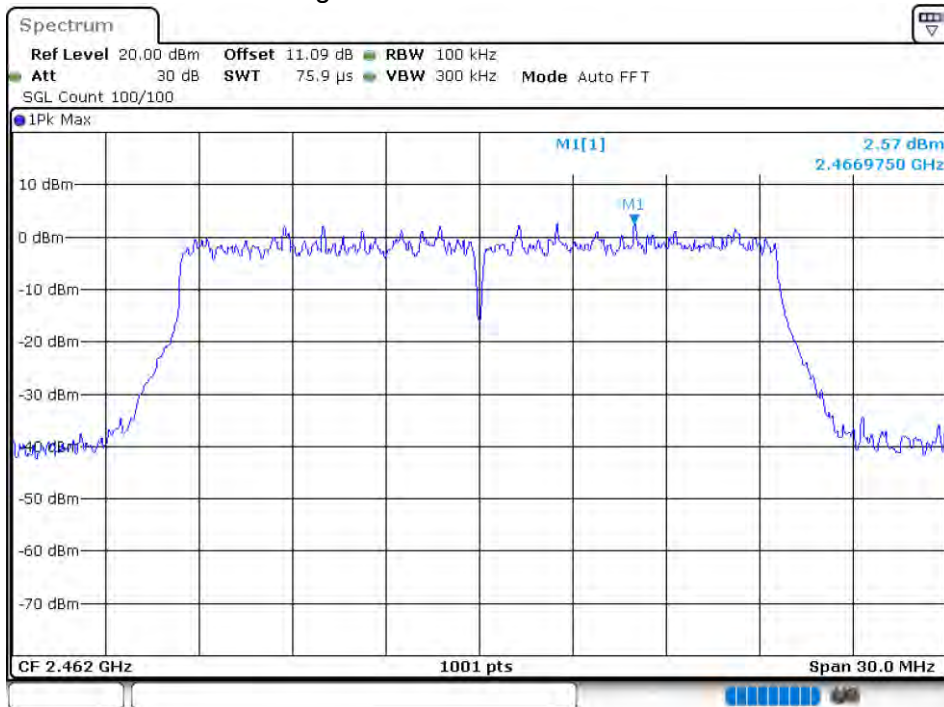


Band Edge NVNT ax20 2462MHz Ant 1 Emission

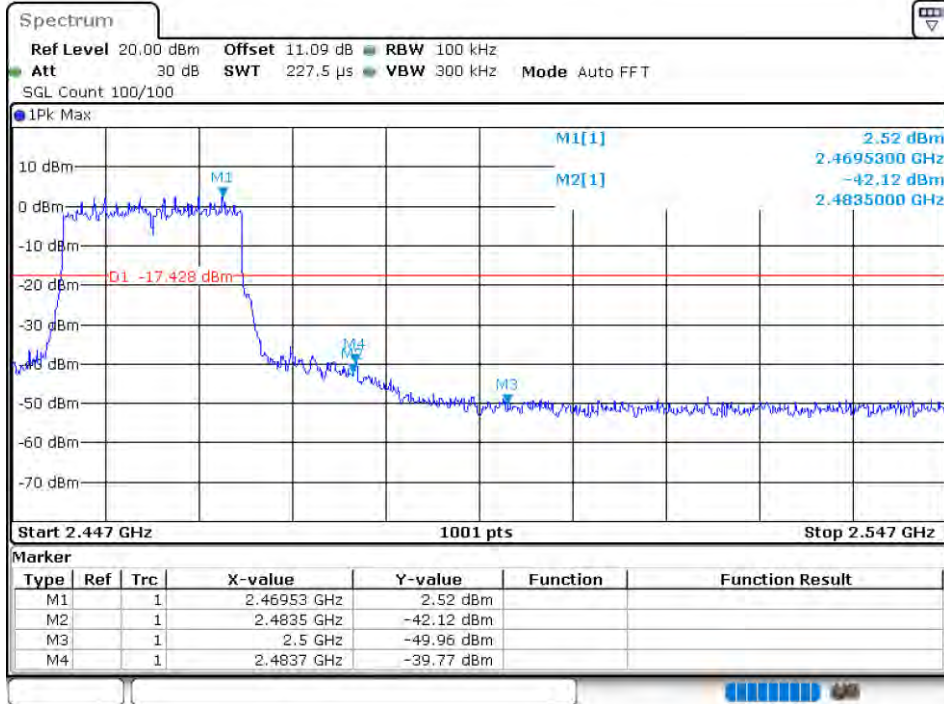


Band Edge NVNT ax20 2412MHz Ant 2 Ref

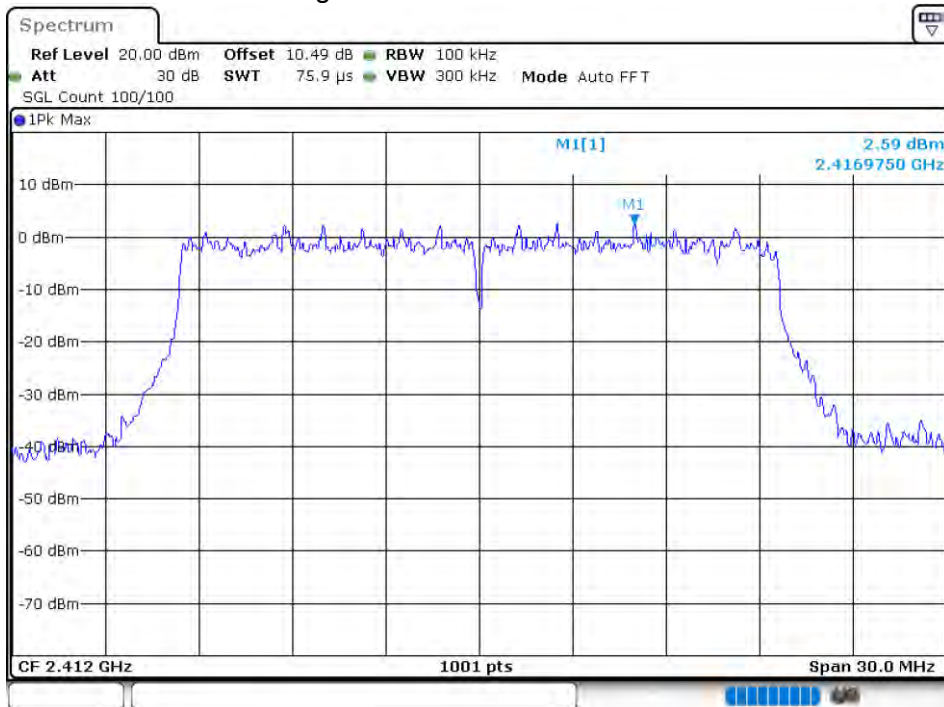


Band Edge NVNT ax20 2412MHz Ant 2 Emission

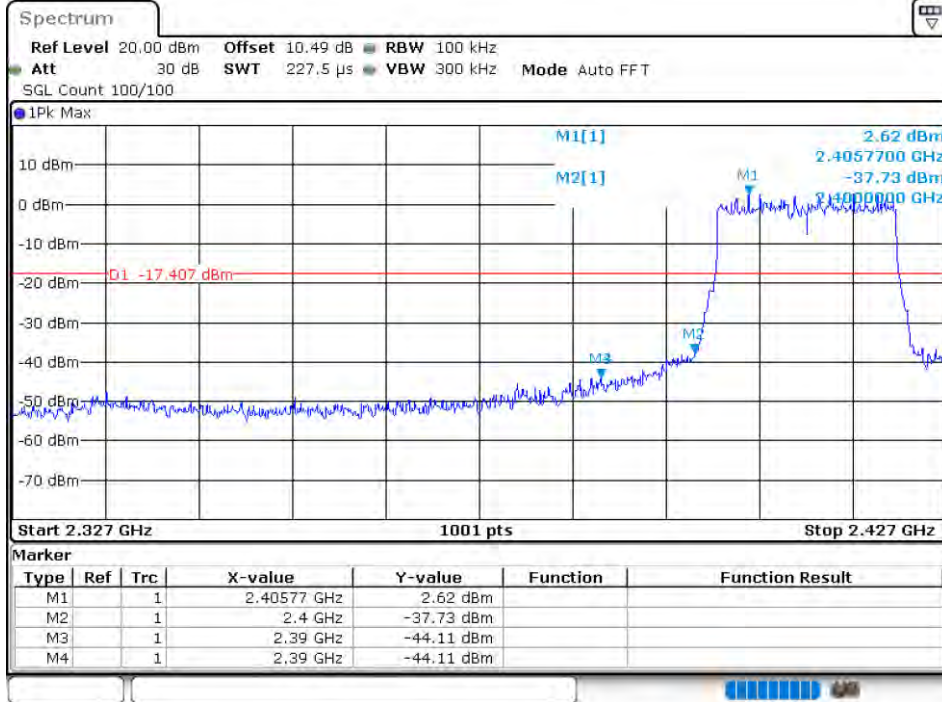

Band Edge NVNT ax20 2462MHz Ant 2 Ref

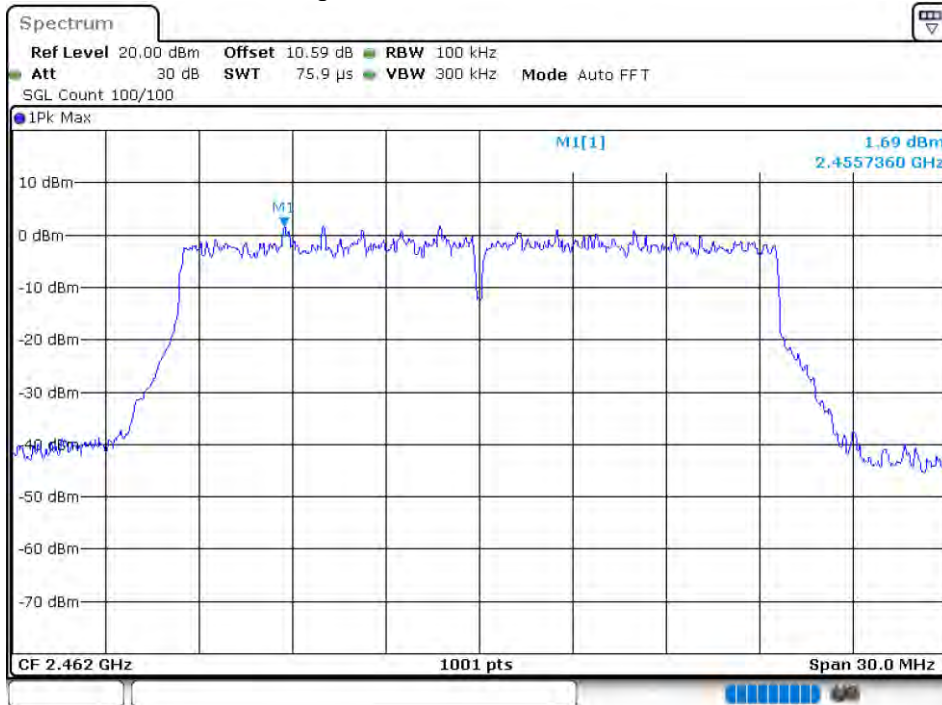


Band Edge NVNT ax20 2462MHz Ant 2 Emission

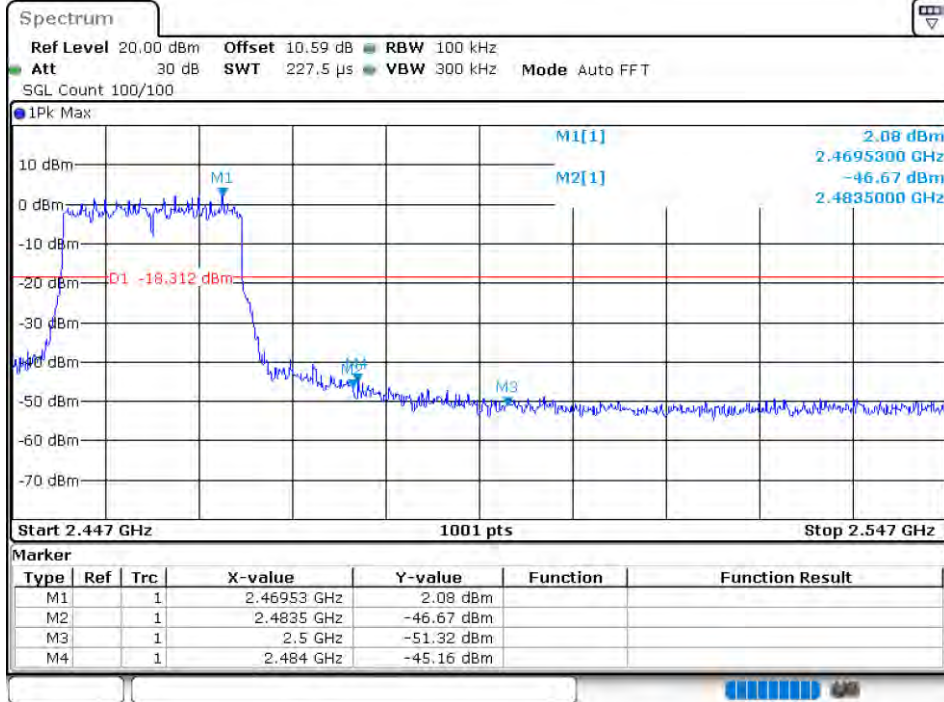

Band Edge NVNT b 2412MHz Ant 1 Ref




Band Edge NVNT b 2412MHz Ant 1 Emission

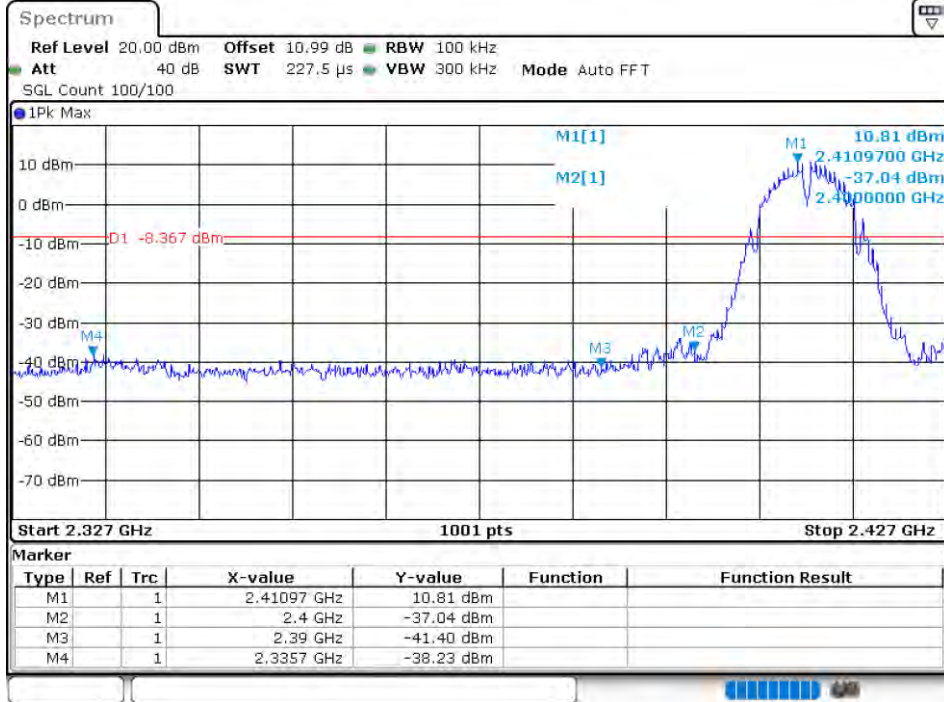

Band Edge NVNT b 2462MHz Ant 1 Ref




Band Edge NVNT b 2462MHz Ant 1 Emission

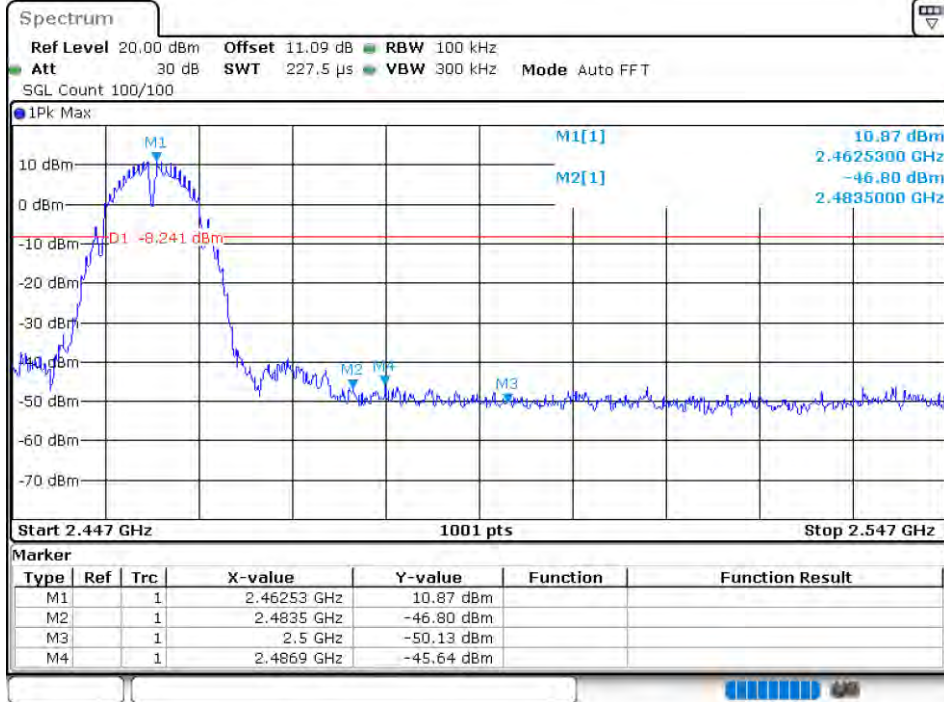

Band Edge NVNT b 2412MHz Ant 2 Ref




Band Edge NVNT b 2412MHz Ant 2 Emission

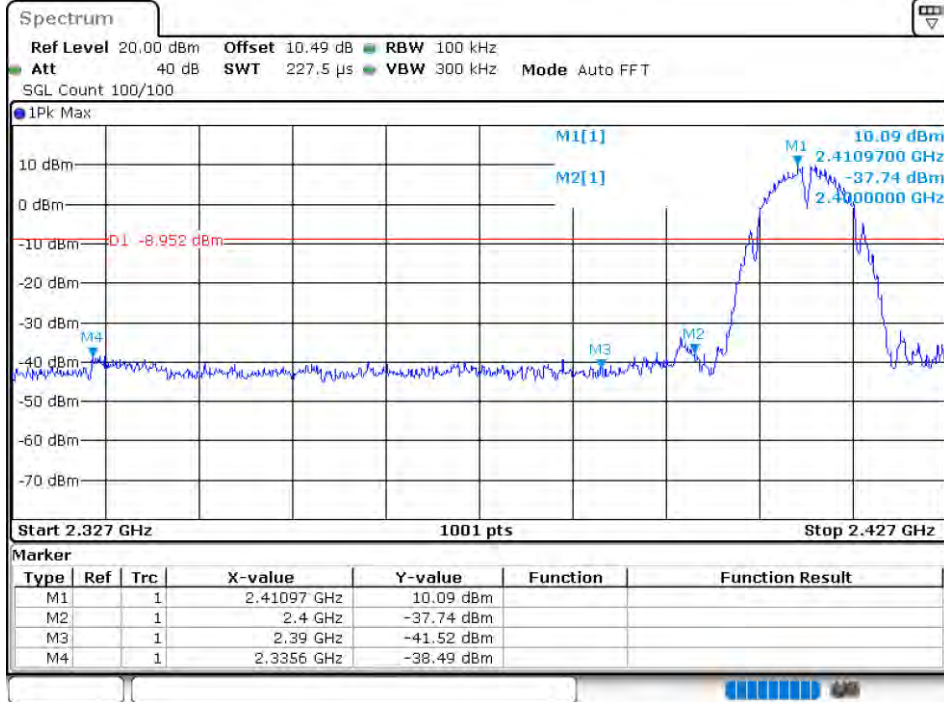


Band Edge NVNT b 2462MHz Ant 2 Ref




Band Edge NVNT b 2462MHz Ant 2 Emission

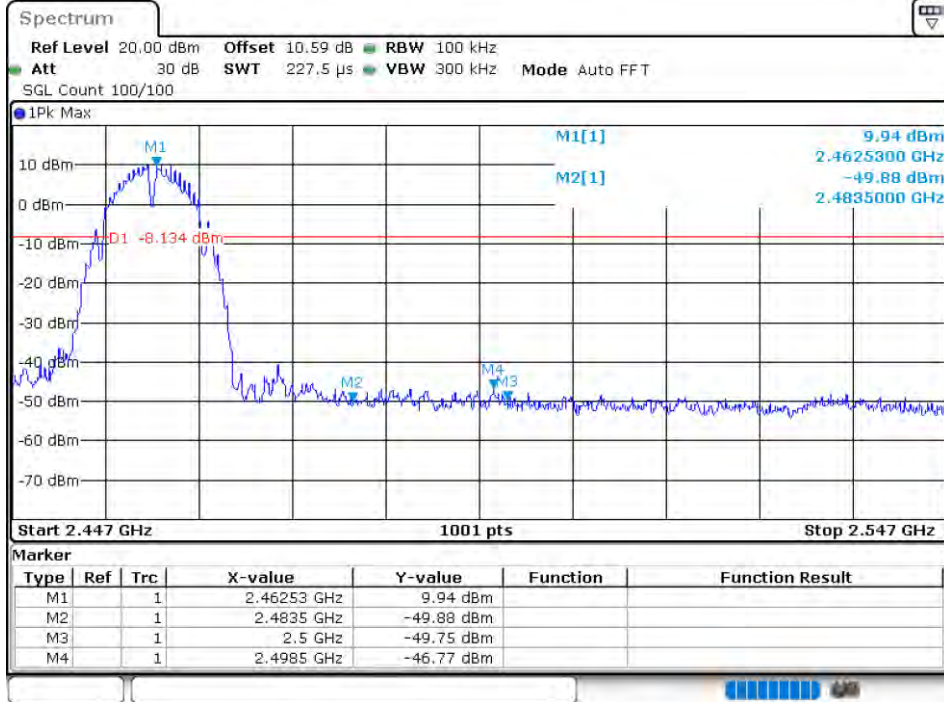


Band Edge NVNT g 2412MHz Ant 1 Ref

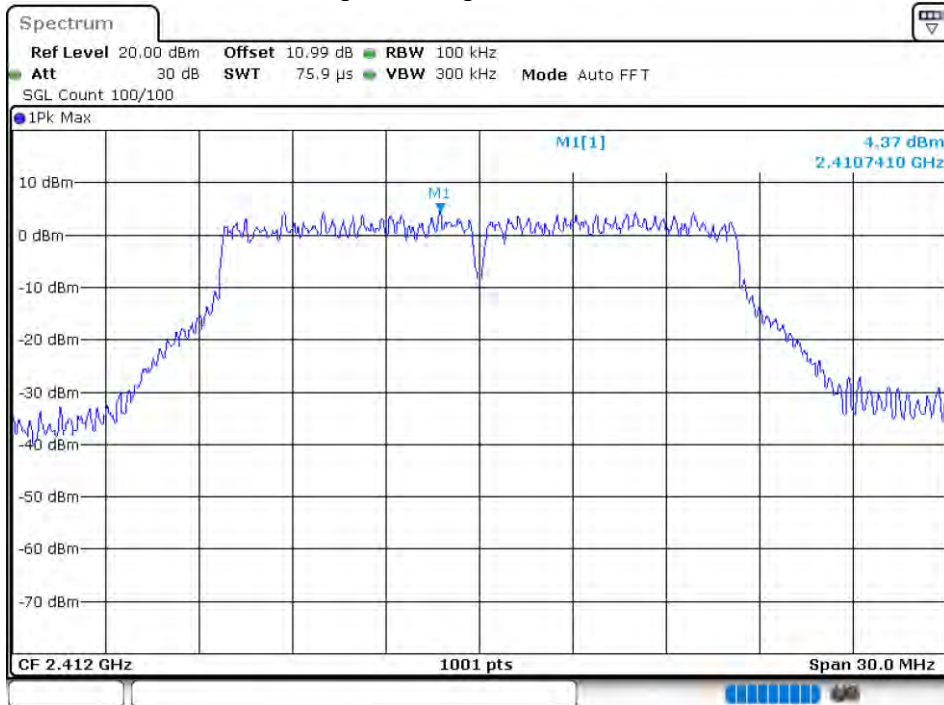


Band Edge NVNT g 2412MHz Ant 1 Emission

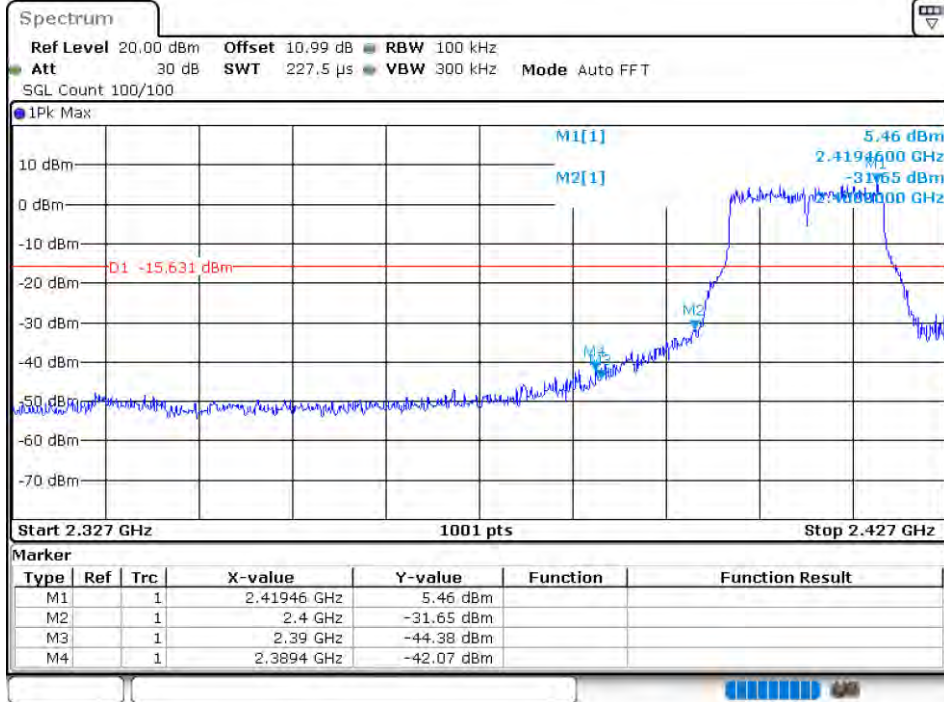


Band Edge NVNT g 2462MHz Ant 1 Ref

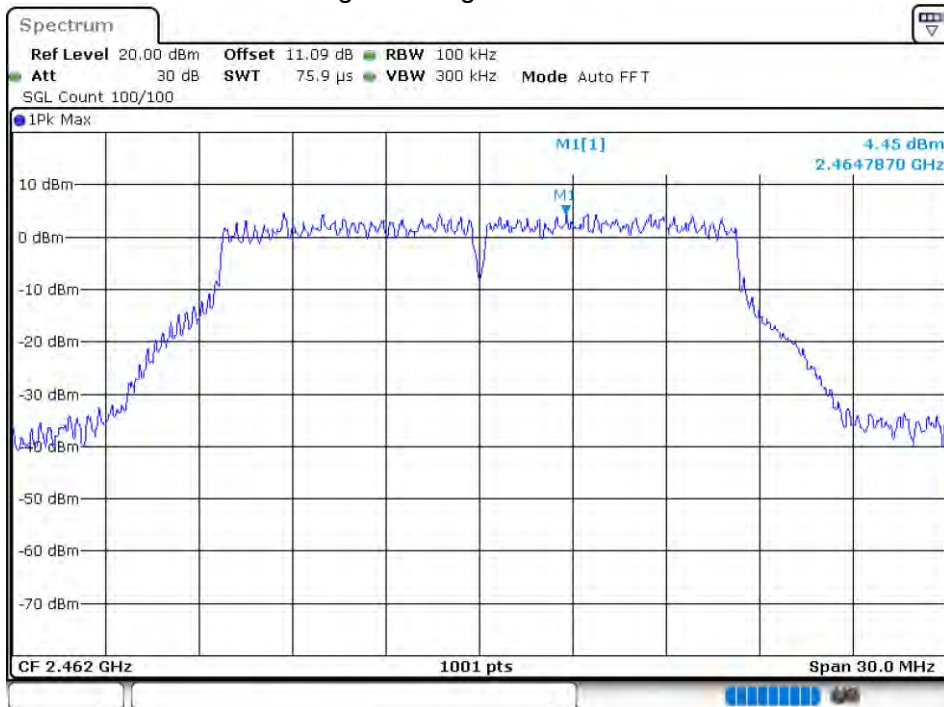


Band Edge NVNT g 2462MHz Ant 1 Emission

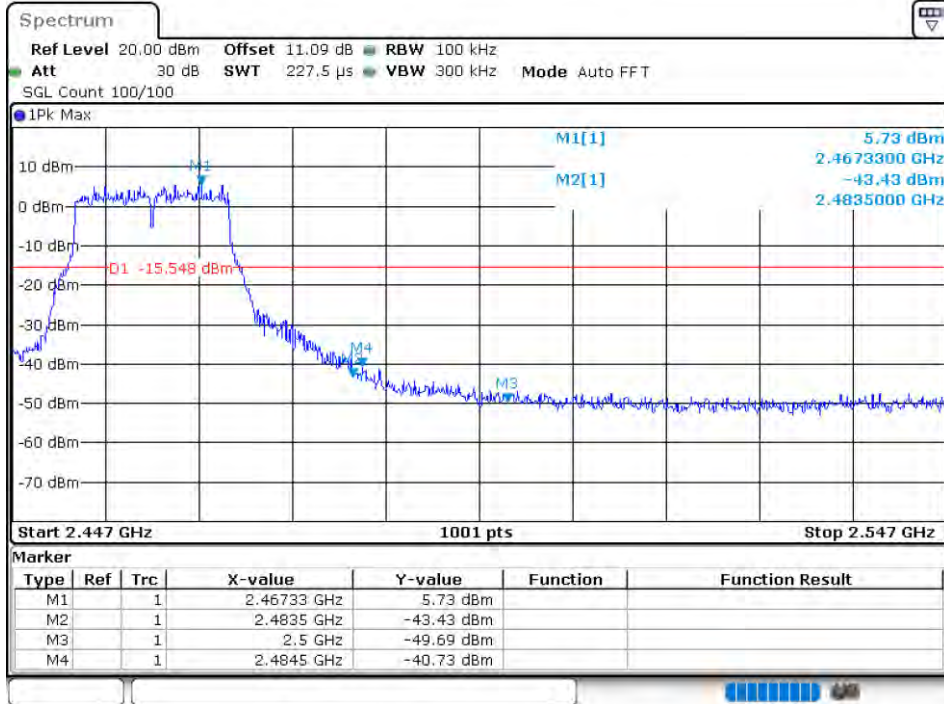


Band Edge NVNT g 2412MHz Ant 2 Ref

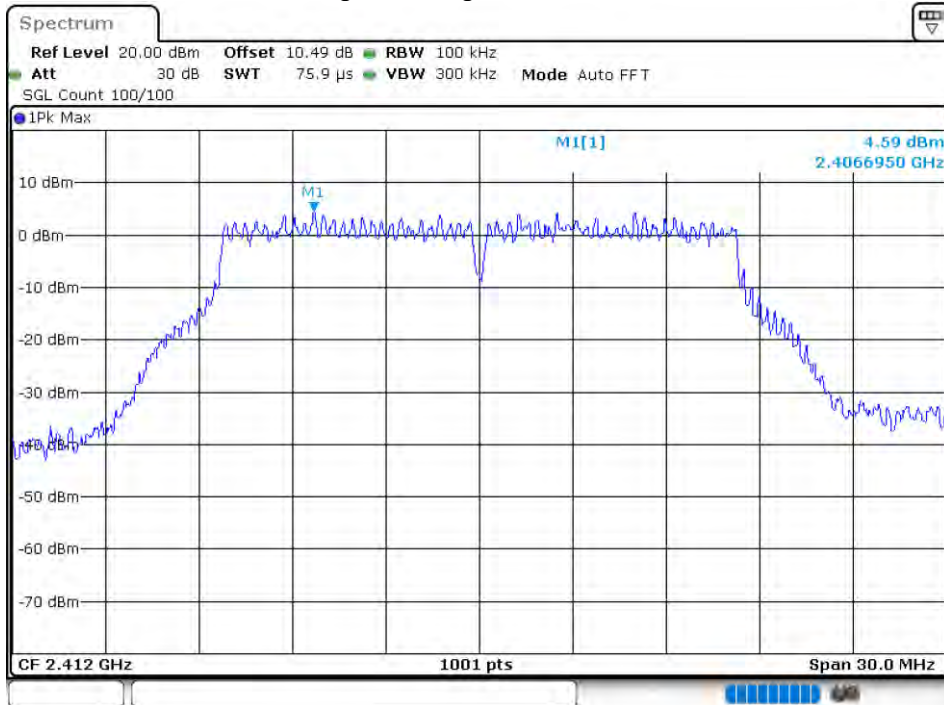


Band Edge NVNT g 2412MHz Ant 2 Emission

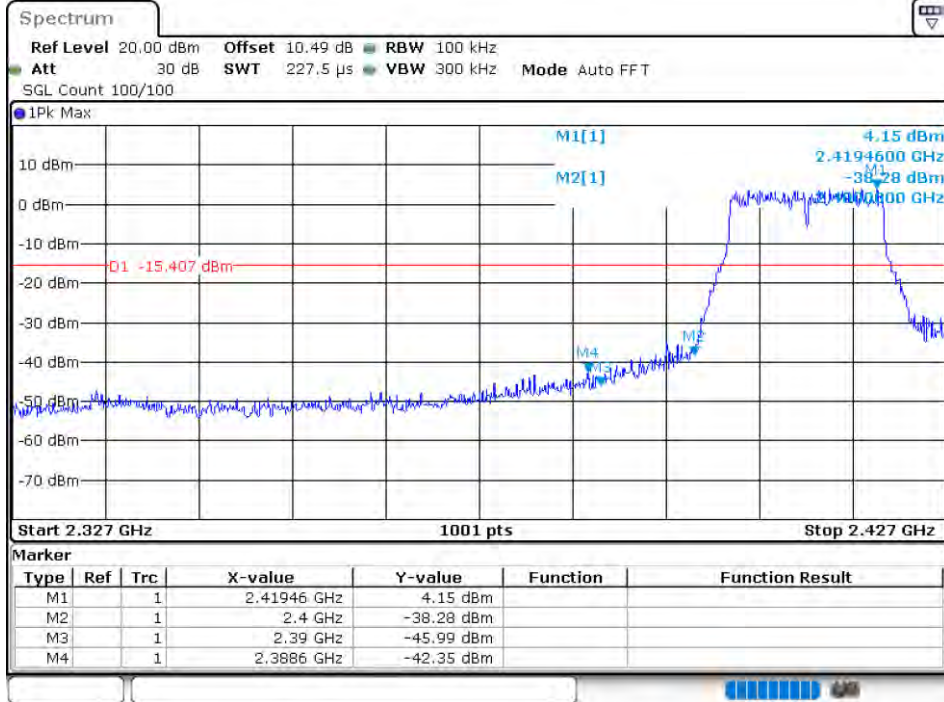


Band Edge NVNT g 2462MHz Ant 2 Ref

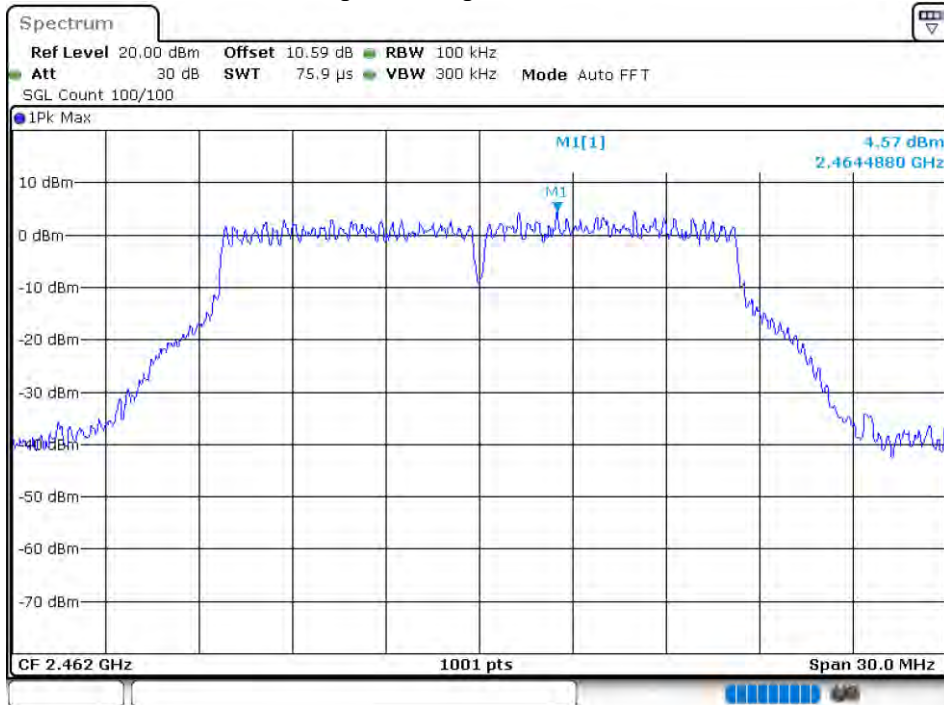


Band Edge NVNT g 2462MHz Ant 2 Emission

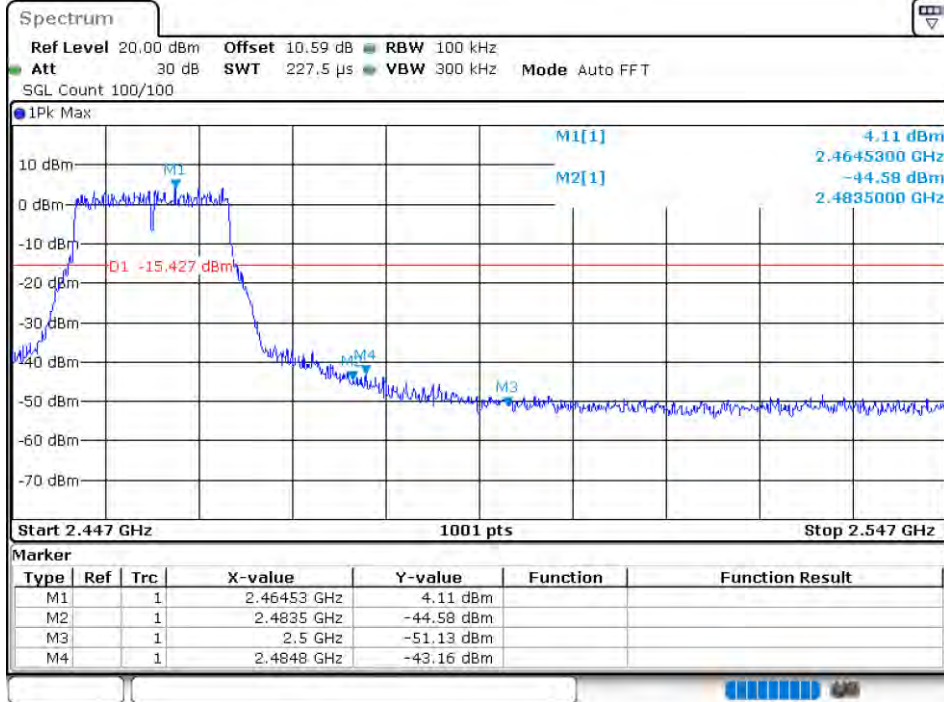


Band Edge NVNT n20 2412MHz Ant 1 Ref

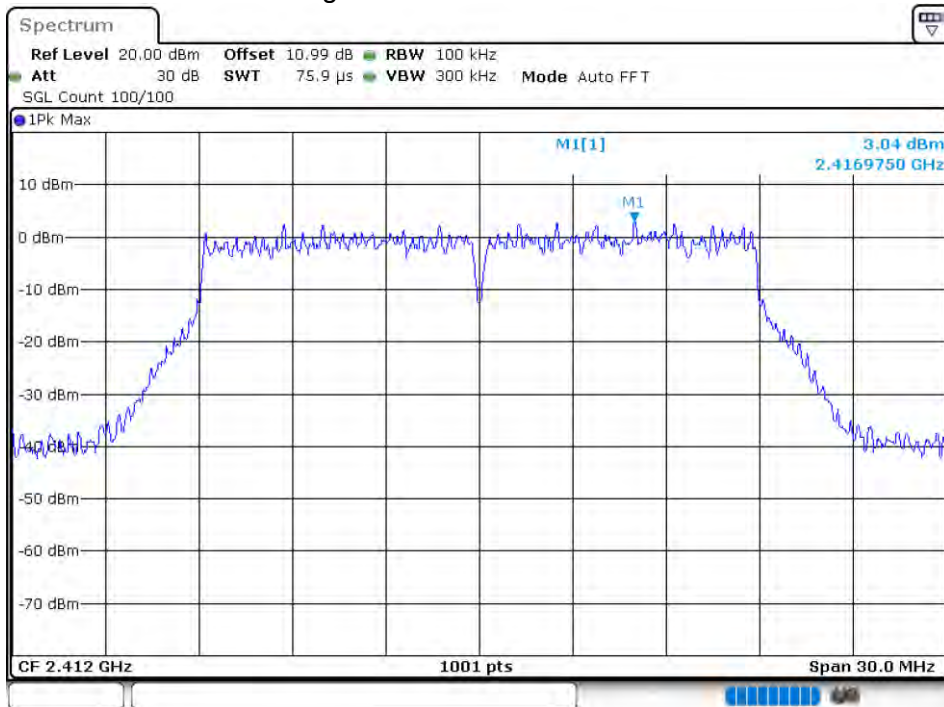


Band Edge NVNT n20 2412MHz Ant 1 Emission

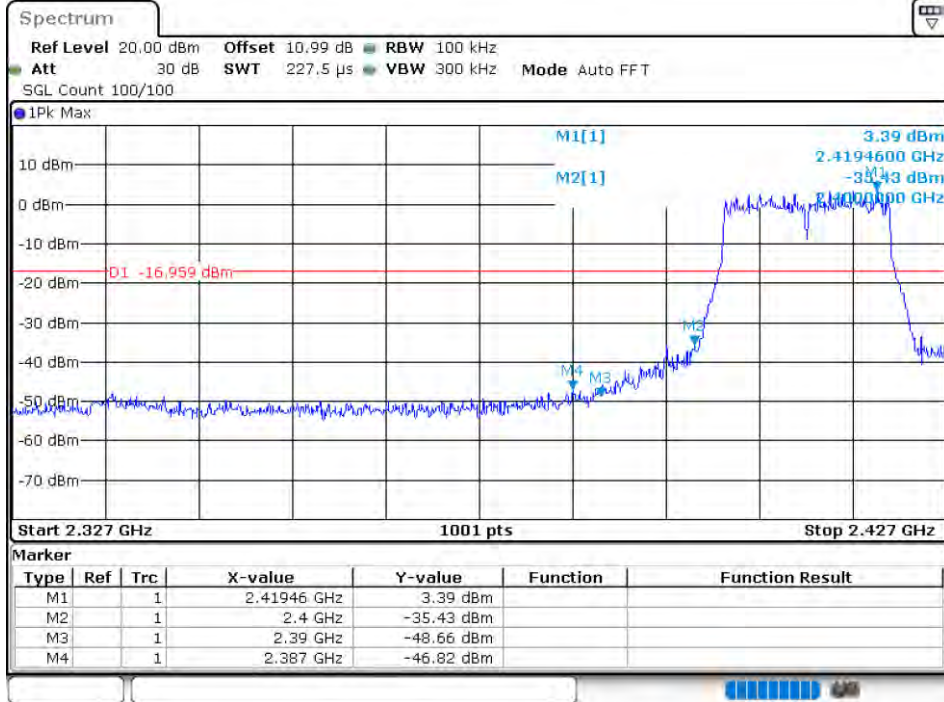


Band Edge NVNT n20 2462MHz Ant 1 Ref

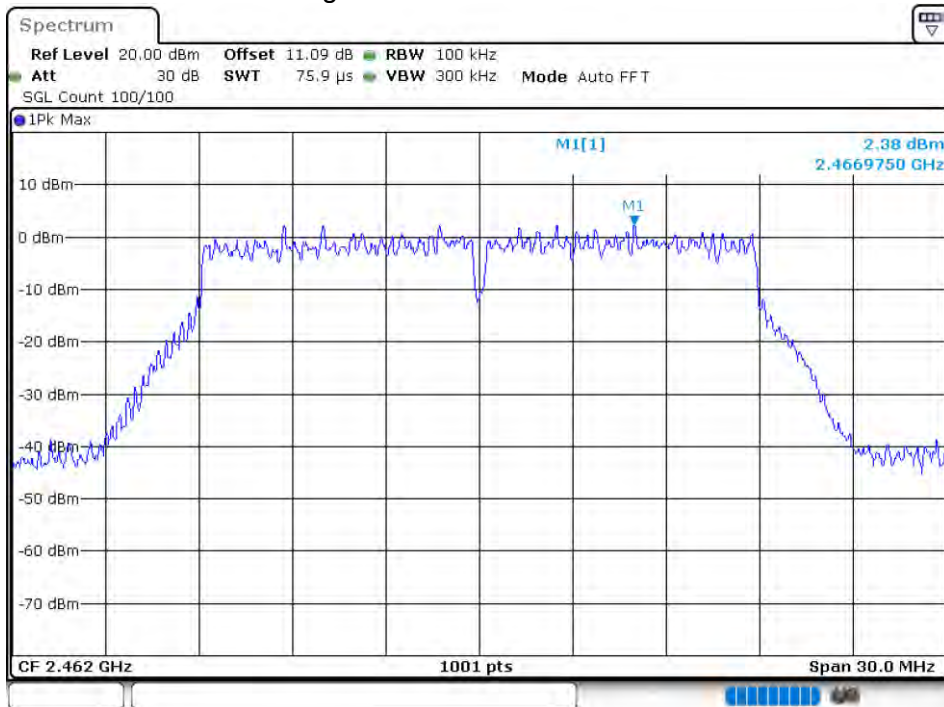


Band Edge NVNT n20 2462MHz Ant 1 Emission

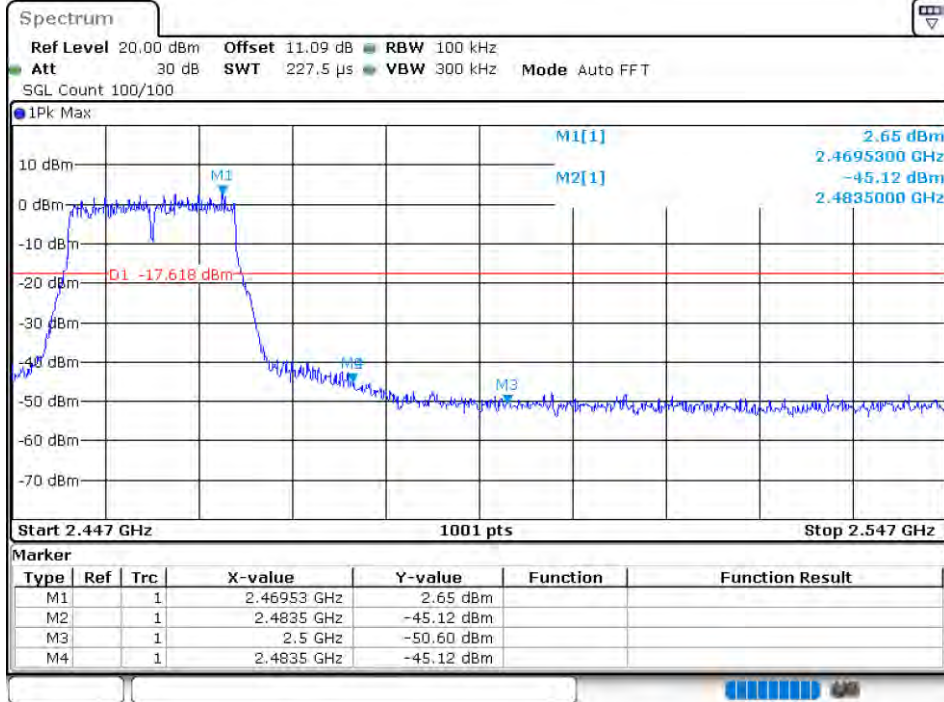


Band Edge NVNT n20 2412MHz Ant 2 Ref

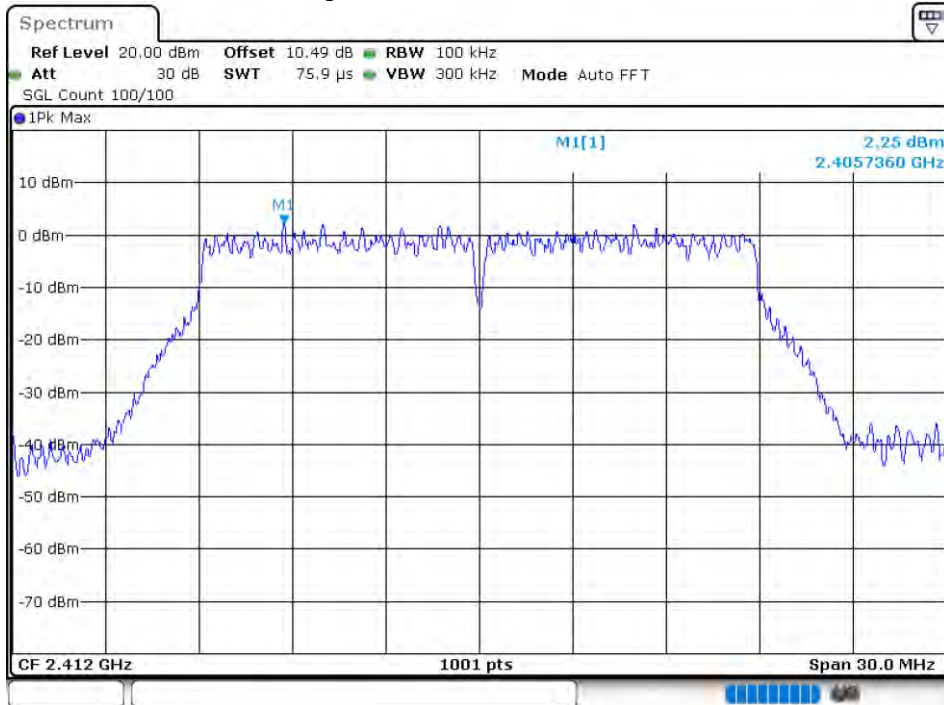


Band Edge NVNT n20 2412MHz Ant 2 Emission

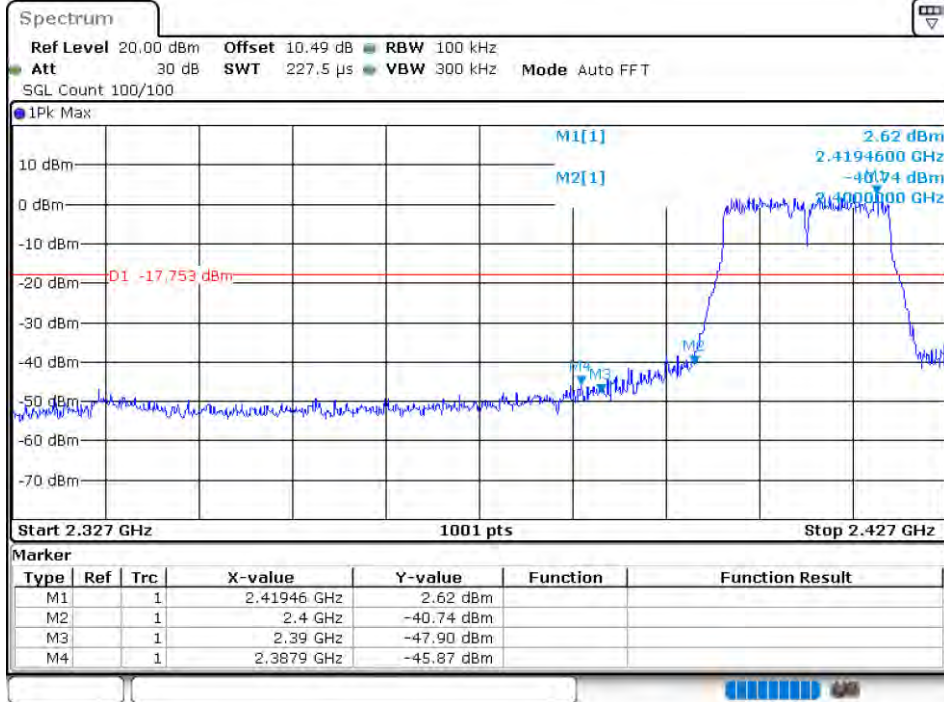

Band Edge NVNT n20 2462MHz Ant 2 Ref

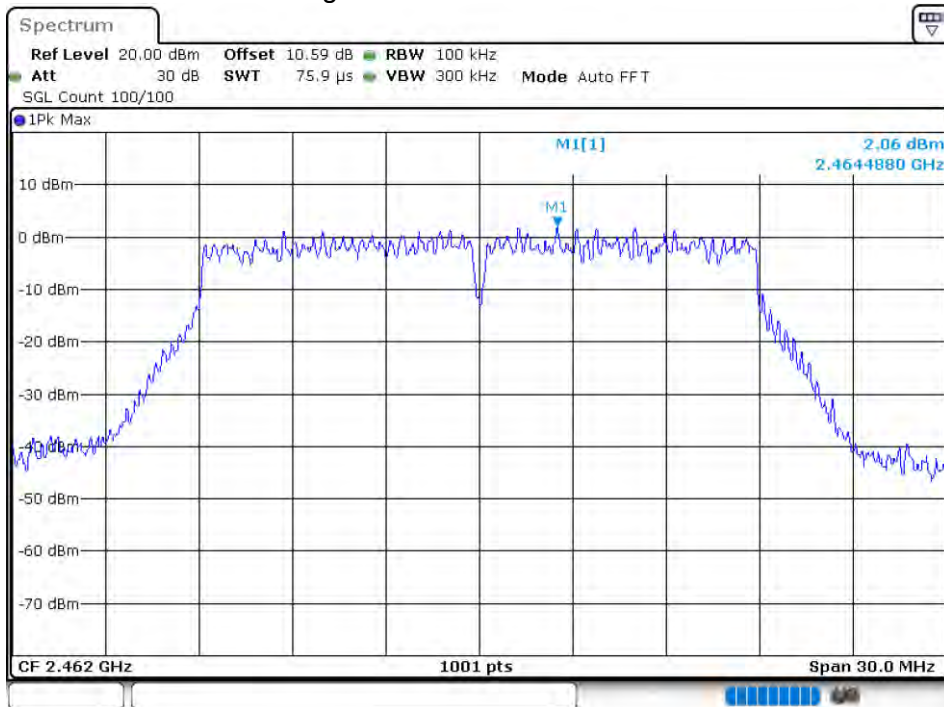


Band Edge NVNT n20 2462MHz Ant 2 Emission

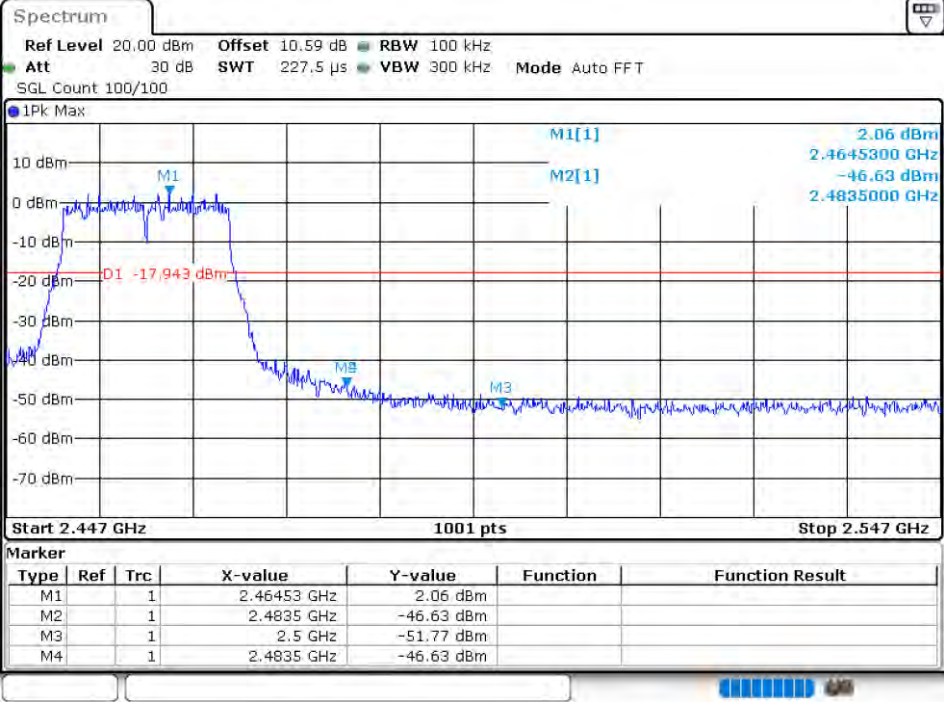


8.1.6 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ax20	2412	Ant 1	-44.22	-20	Pass
NVNT	ax20	2437	Ant 1	-44.51	-20	Pass
NVNT	ax20	2462	Ant 1	-45.38	-20	Pass
NVNT	ax20	2412	Ant 2	-45.91	-20	Pass
NVNT	ax20	2437	Ant 2	-45.39	-20	Pass
NVNT	ax20	2462	Ant 2	-45.06	-20	Pass
NVNT	b	2412	Ant 1	-53	-20	Pass
NVNT	b	2437	Ant 1	-54.81	-20	Pass
NVNT	b	2462	Ant 1	-54	-20	Pass
NVNT	b	2412	Ant 2	-52.87	-20	Pass
NVNT	b	2437	Ant 2	-52.83	-20	Pass
NVNT	b	2462	Ant 2	-54.24	-20	Pass
NVNT	g	2412	Ant 1	-47.06	-20	Pass
NVNT	g	2437	Ant 1	-46.8	-20	Pass
NVNT	g	2462	Ant 1	-47.78	-20	Pass
NVNT	g	2412	Ant 2	-47.81	-20	Pass
NVNT	g	2437	Ant 2	-47.67	-20	Pass
NVNT	g	2462	Ant 2	-46.87	-20	Pass
NVNT	n20	2412	Ant 1	-45.1	-20	Pass
NVNT	n20	2437	Ant 1	-46.15	-20	Pass
NVNT	n20	2462	Ant 1	-44.47	-20	Pass
NVNT	n20	2412	Ant 2	-45.71	-20	Pass
NVNT	n20	2437	Ant 2	-45.08	-20	Pass
NVNT	n20	2462	Ant 2	-45.09	-20	Pass


Tx. Spurious NVNT ax20 2412MHz Ant 1 Ref

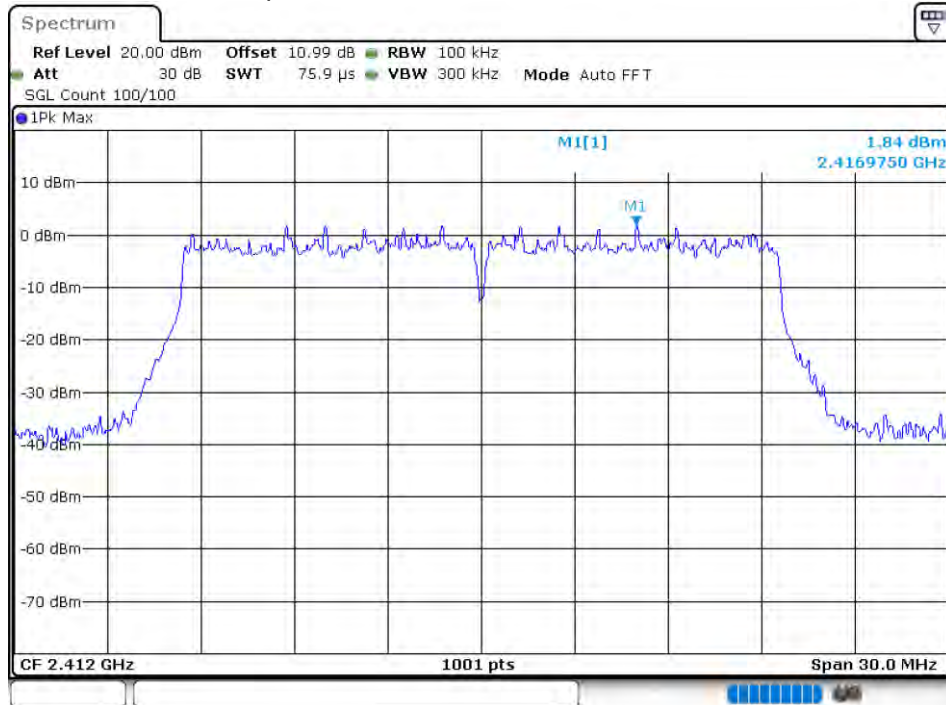


Tx. Spurious NVNT ax20 2412MHz Ant 1 Emission

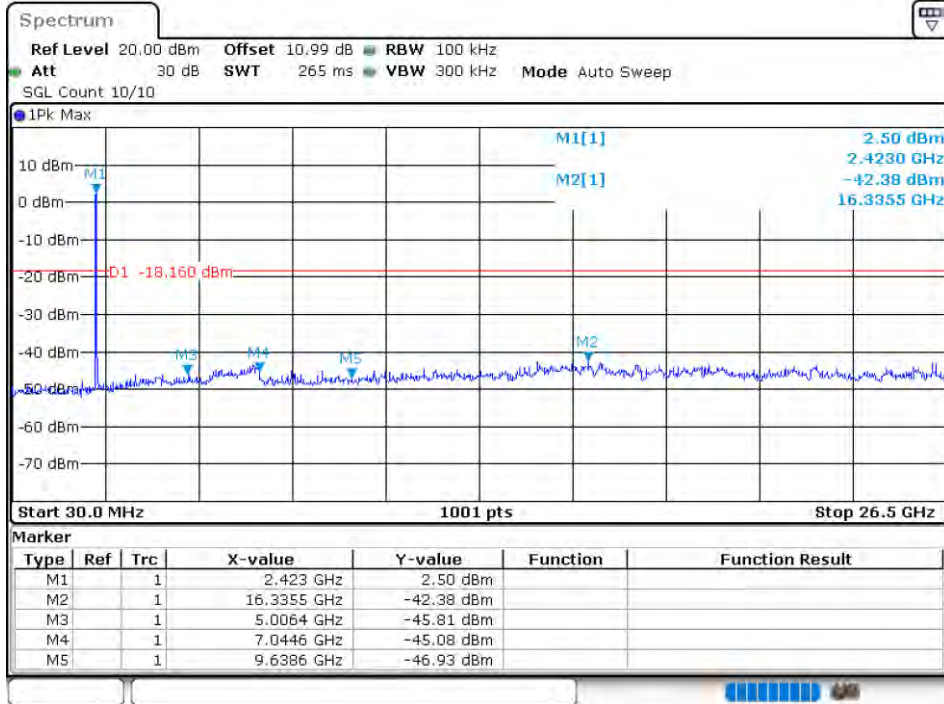


Tx. Spurious NVNT ax20 2437MHz Ant 1 Ref

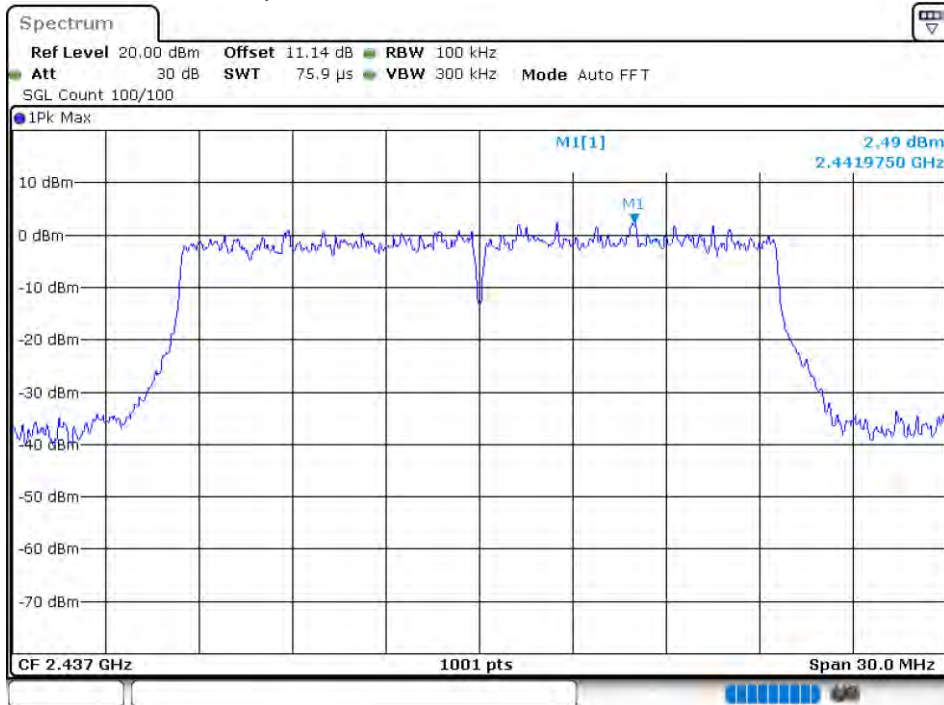


Tx. Spurious NVNT ax20 2437MHz Ant 1 Emission

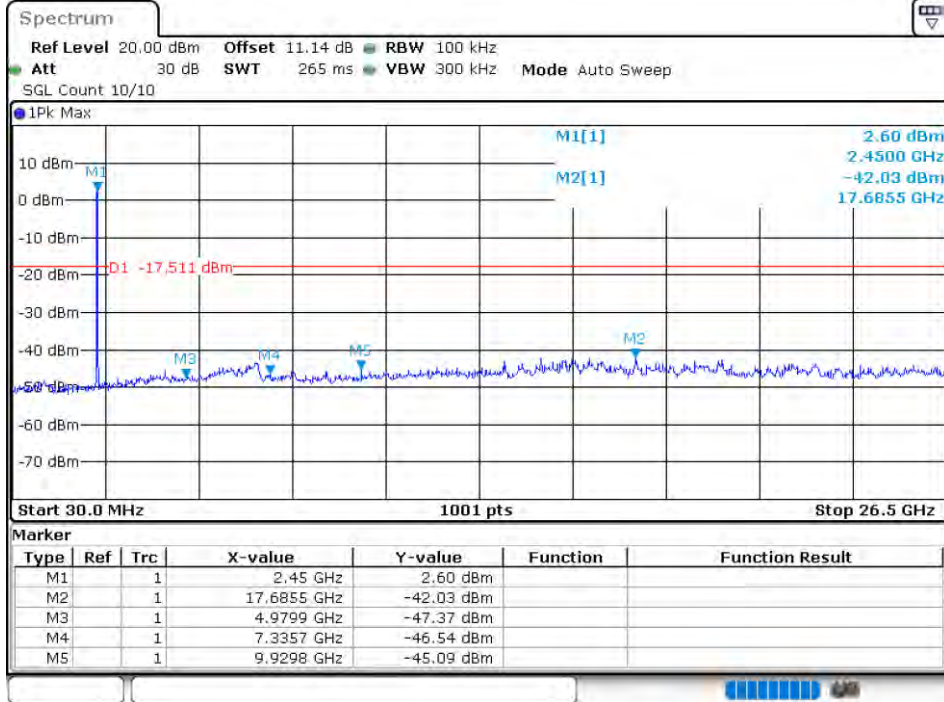


Tx. Spurious NVNT ax20 2462MHz Ant 1 Ref

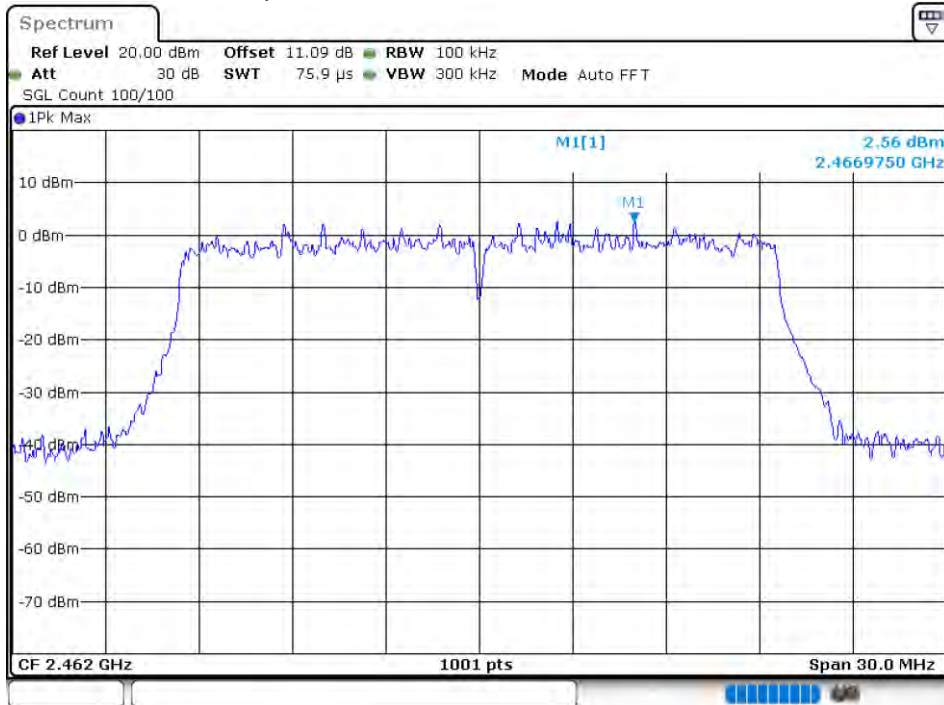


Tx. Spurious NVNT ax20 2462MHz Ant 1 Emission

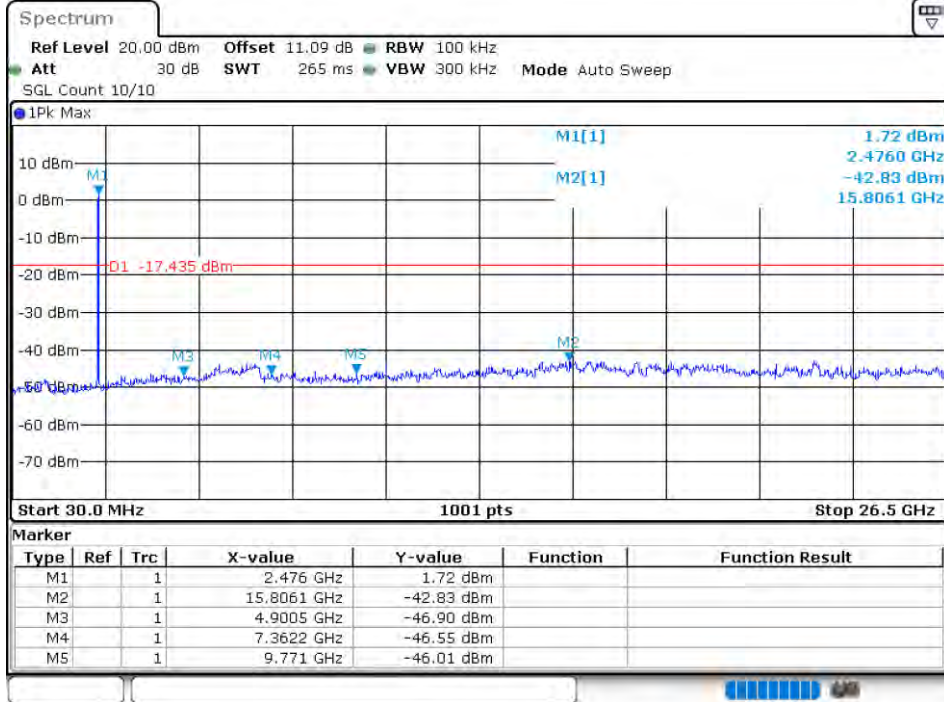


Tx. Spurious NVNT ax20 2412MHz Ant 2 Ref

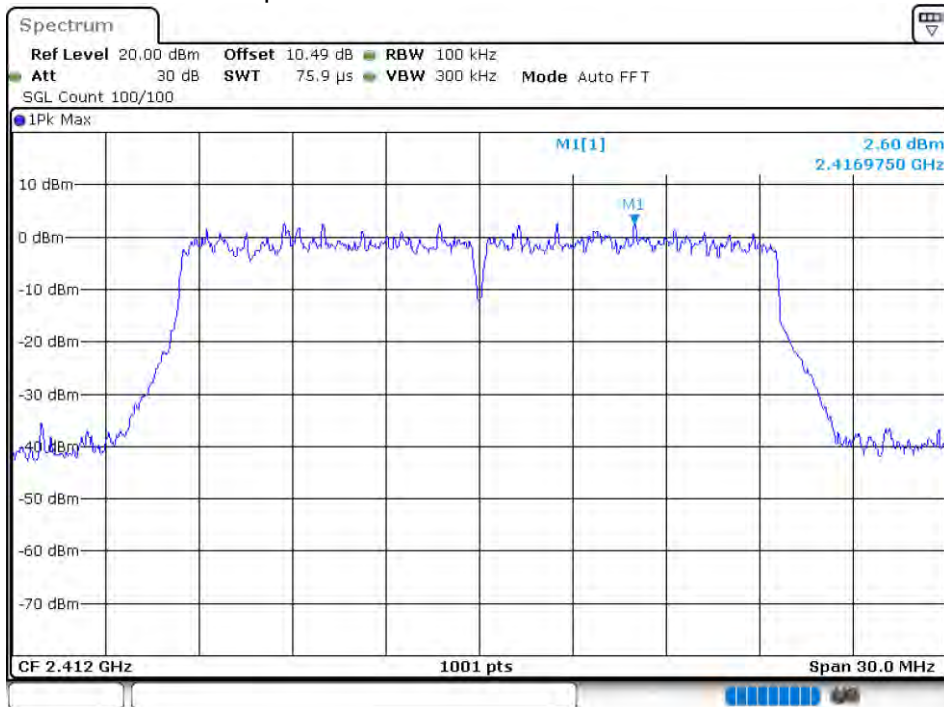


Tx. Spurious NVNT ax20 2412MHz Ant 2 Emission

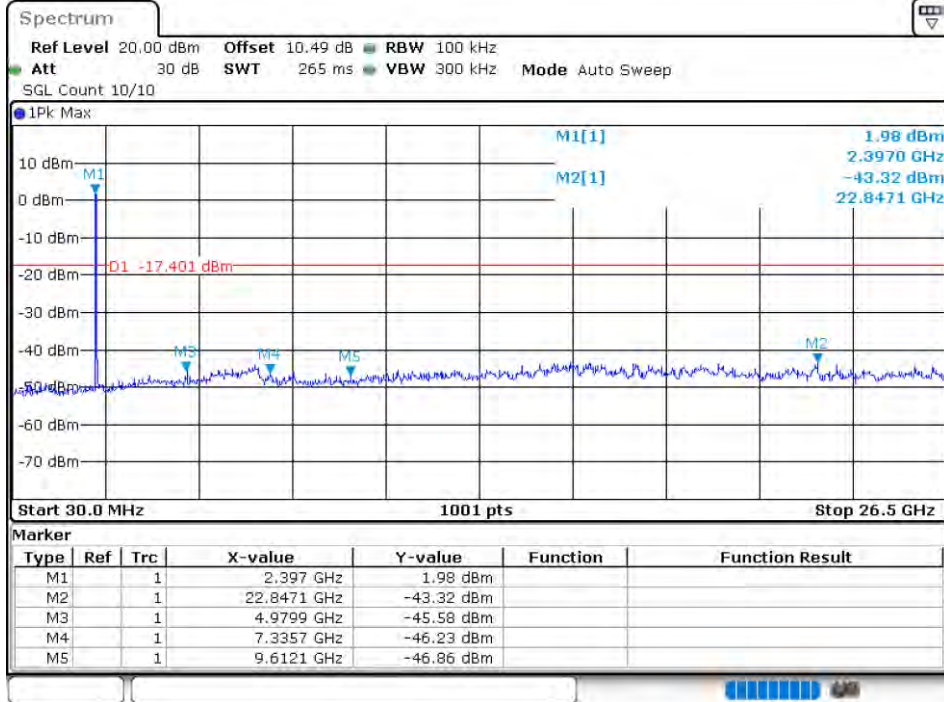


Tx. Spurious NVNT ax20 2437MHz Ant 2 Ref

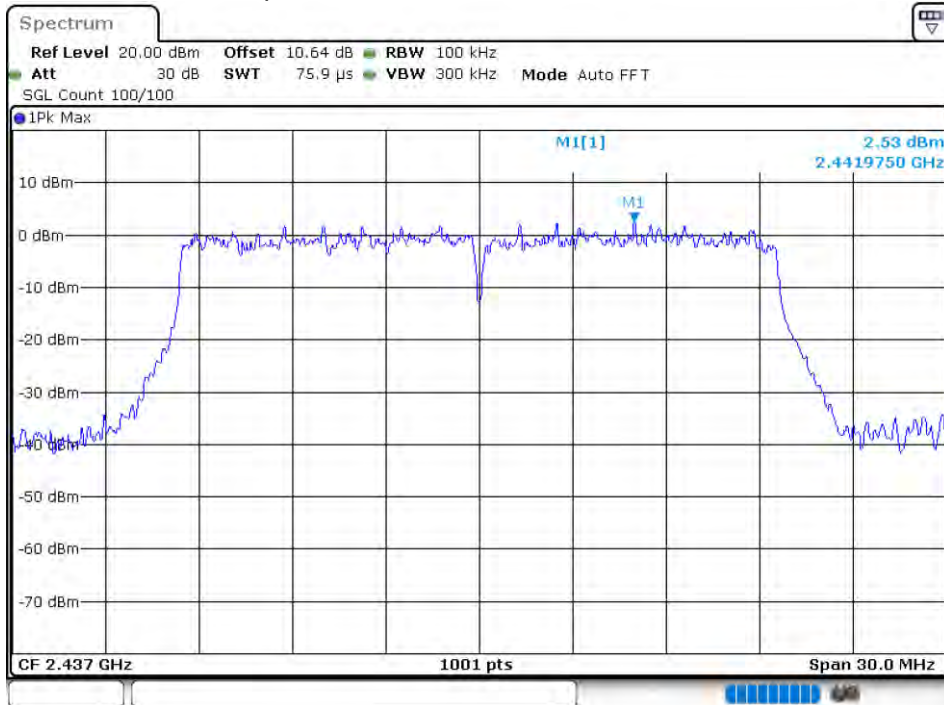


Tx. Spurious NVNT ax20 2437MHz Ant 2 Emission

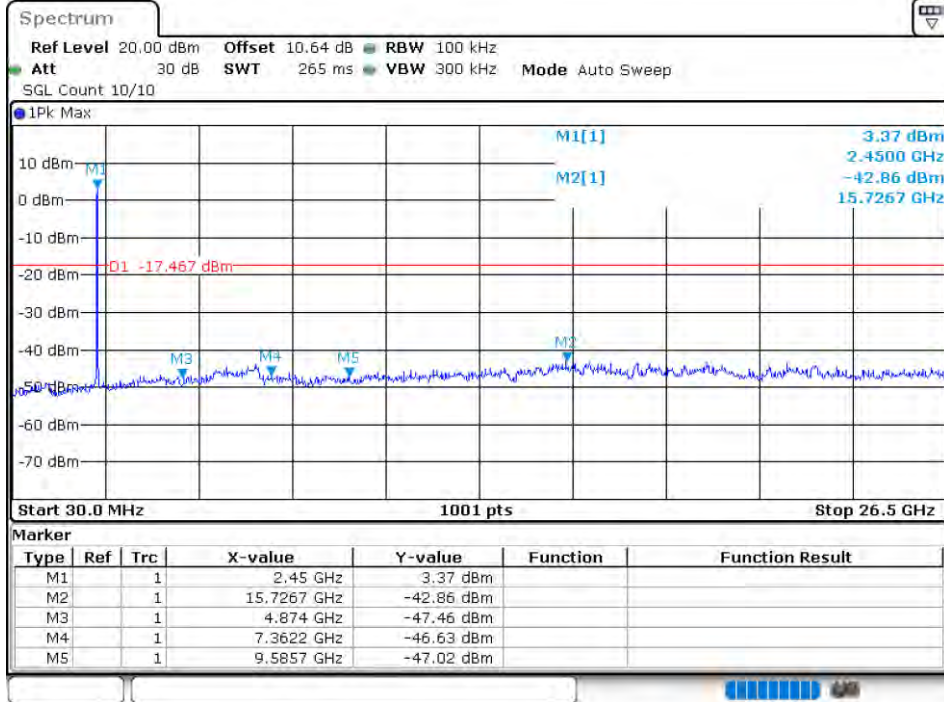


Tx. Spurious NVNT ax20 2462MHz Ant 2 Ref

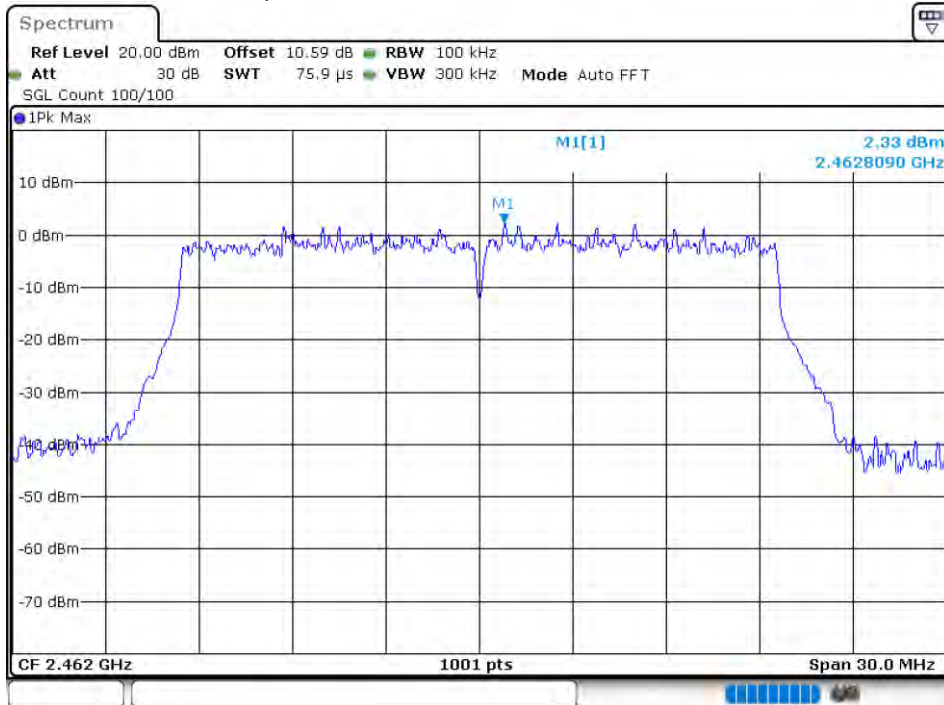


Tx. Spurious NVNT ax20 2462MHz Ant 2 Emission

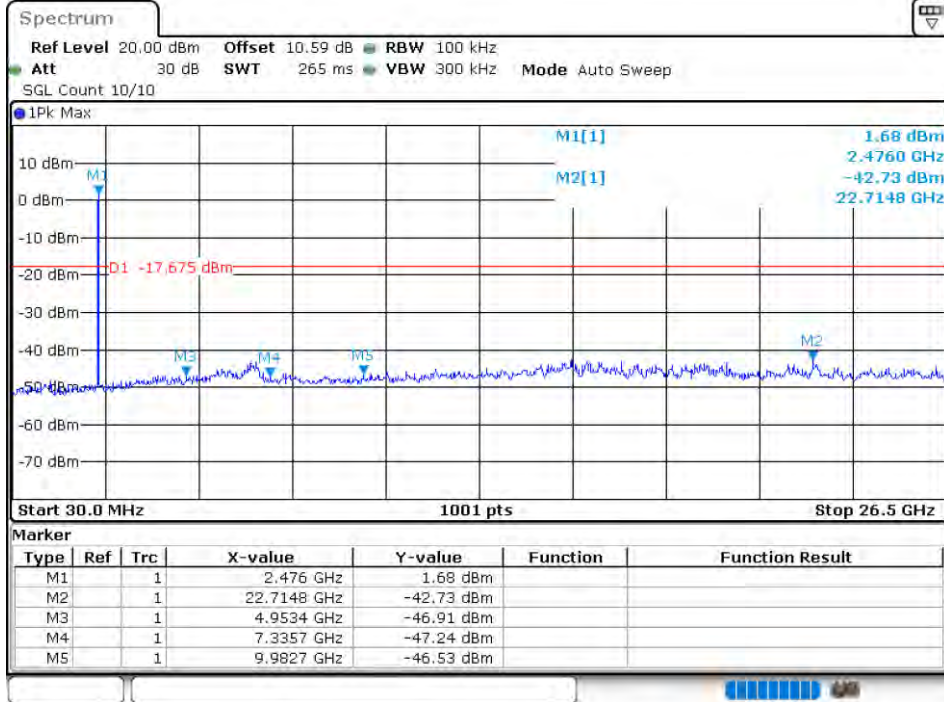


Tx. Spurious NVNT b 2412MHz Ant 1 Ref

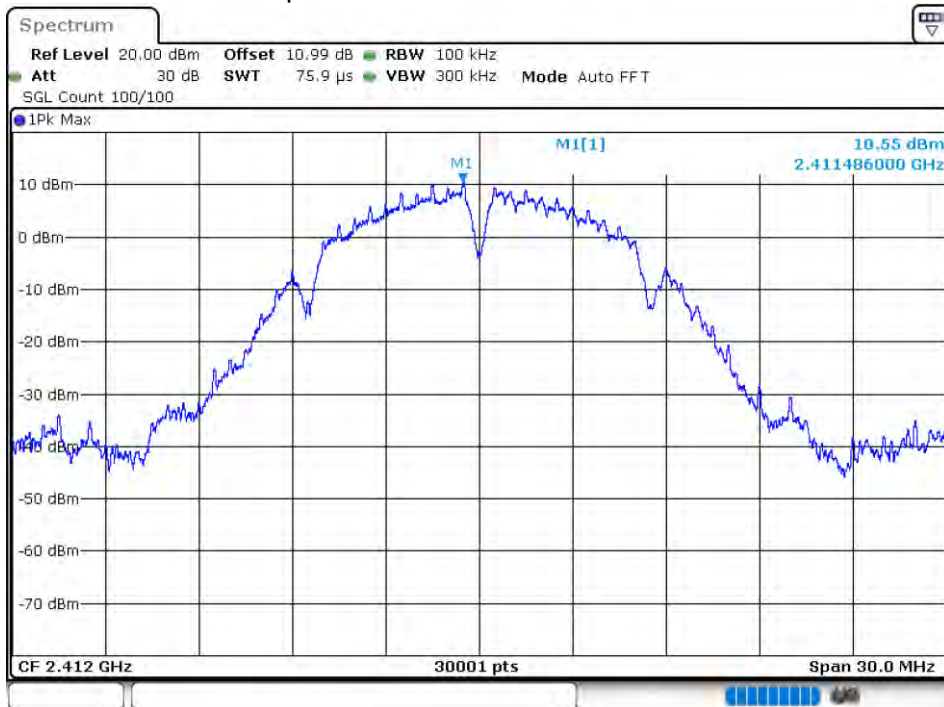


Tx. Spurious NVNT b 2412MHz Ant 1 Emission

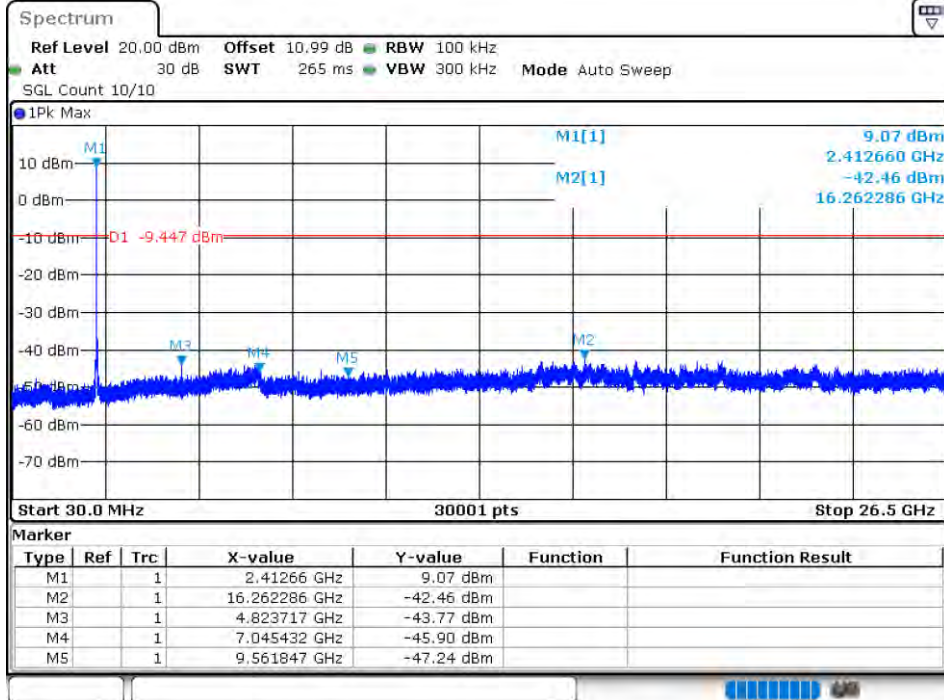

Tx. Spurious NVNT b 2437MHz Ant 1 Ref

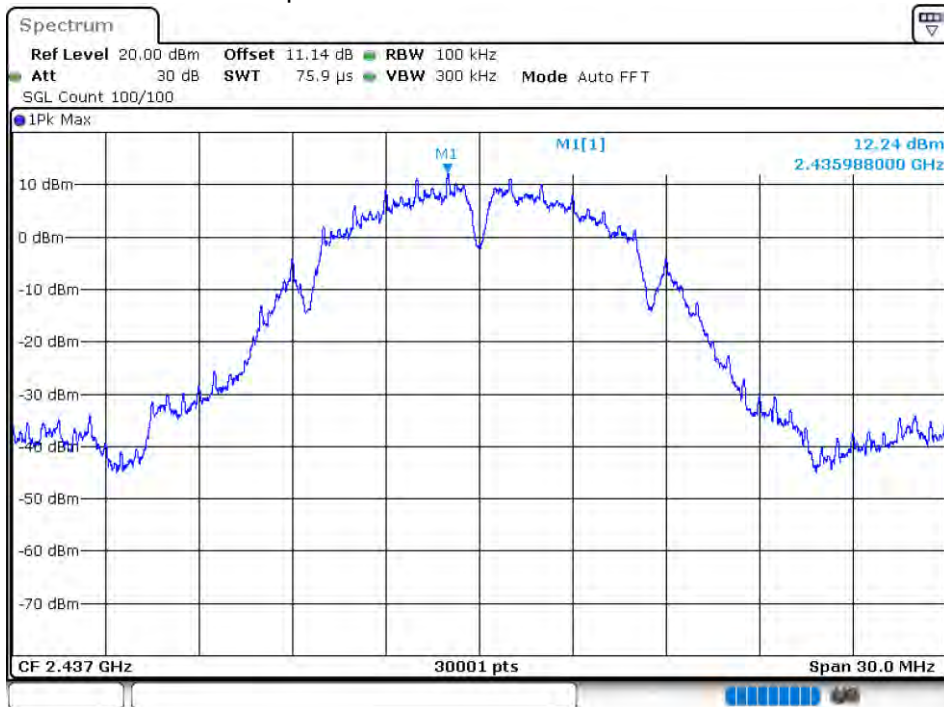


Tx. Spurious NVNT b 2437MHz Ant 1 Emission

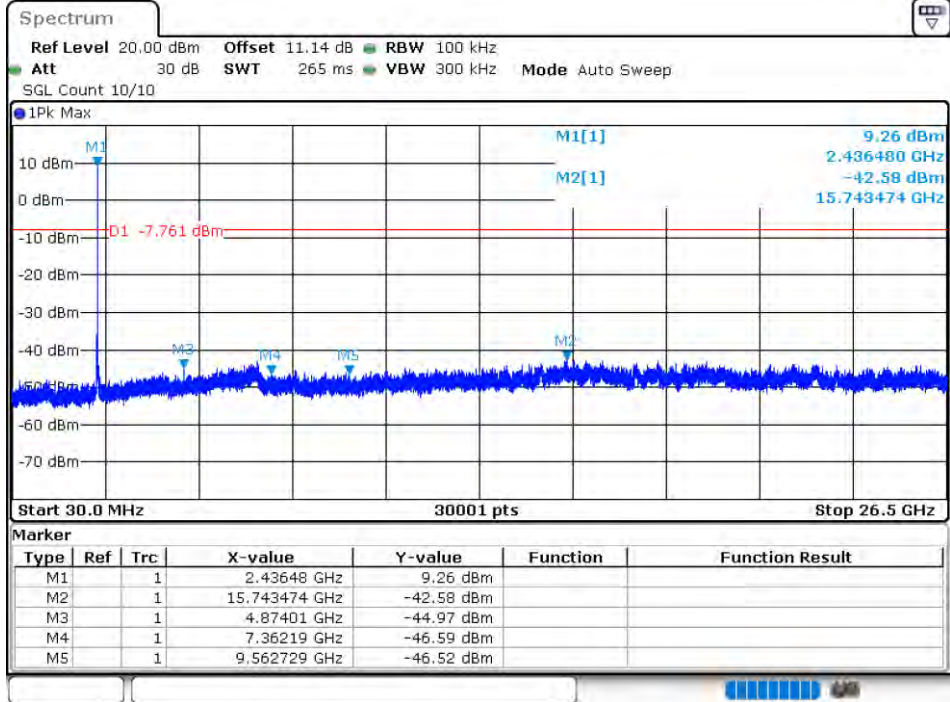

Tx. Spurious NVNT b 2462MHz Ant 1 Ref




Tx. Spurious NVNT b 2462MHz Ant 1 Emission

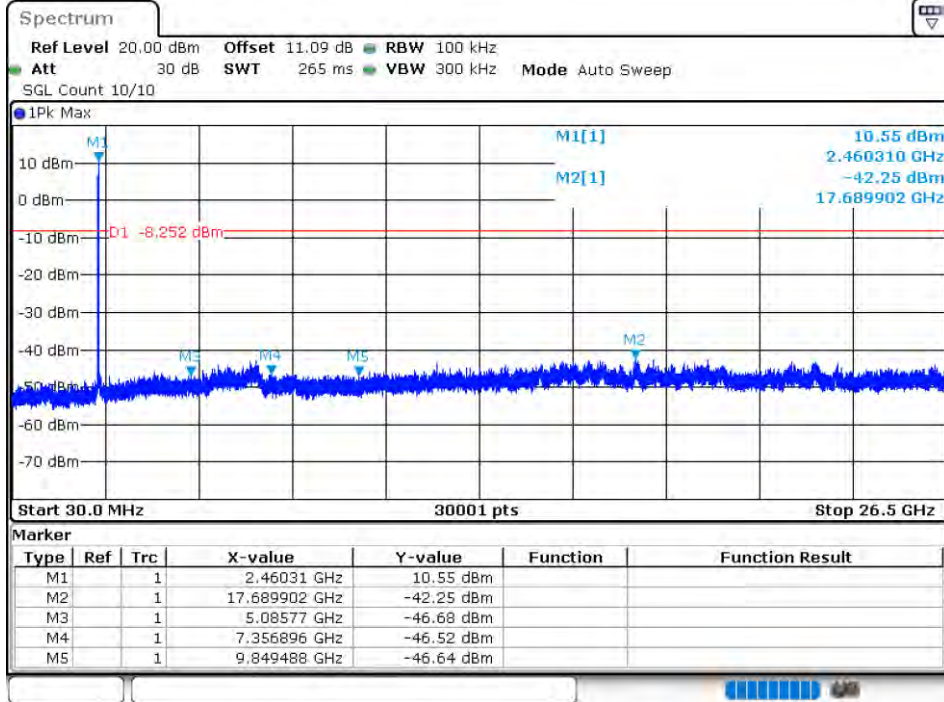


Tx. Spurious NVNT b 2412MHz Ant 2 Ref




Tx. Spurious NVNT b 2412MHz Ant 2 Emission

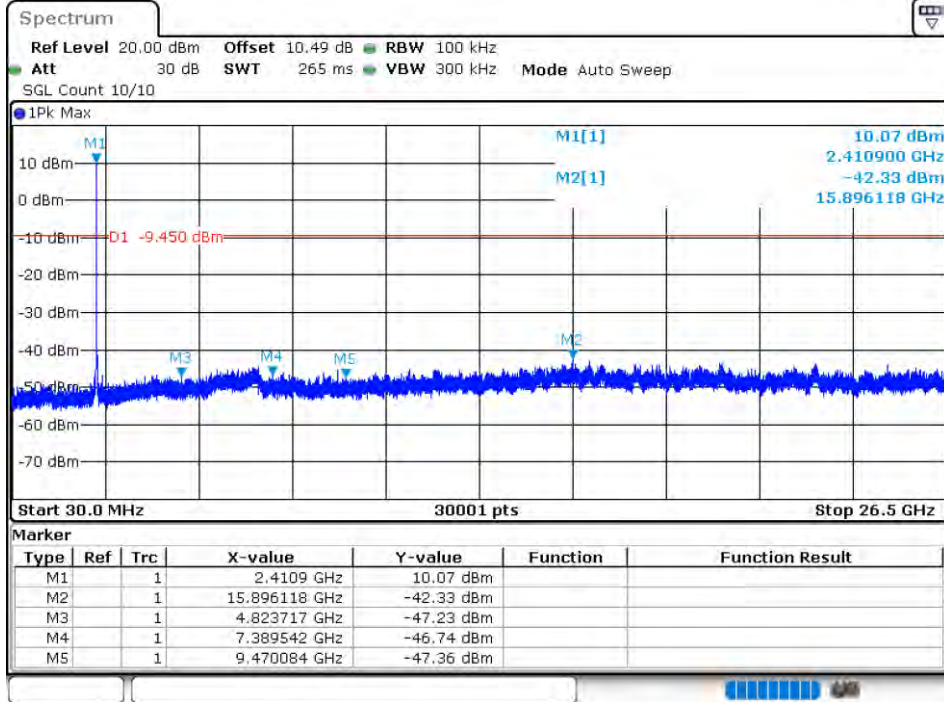

Tx. Spurious NVNT b 2437MHz Ant 2 Ref

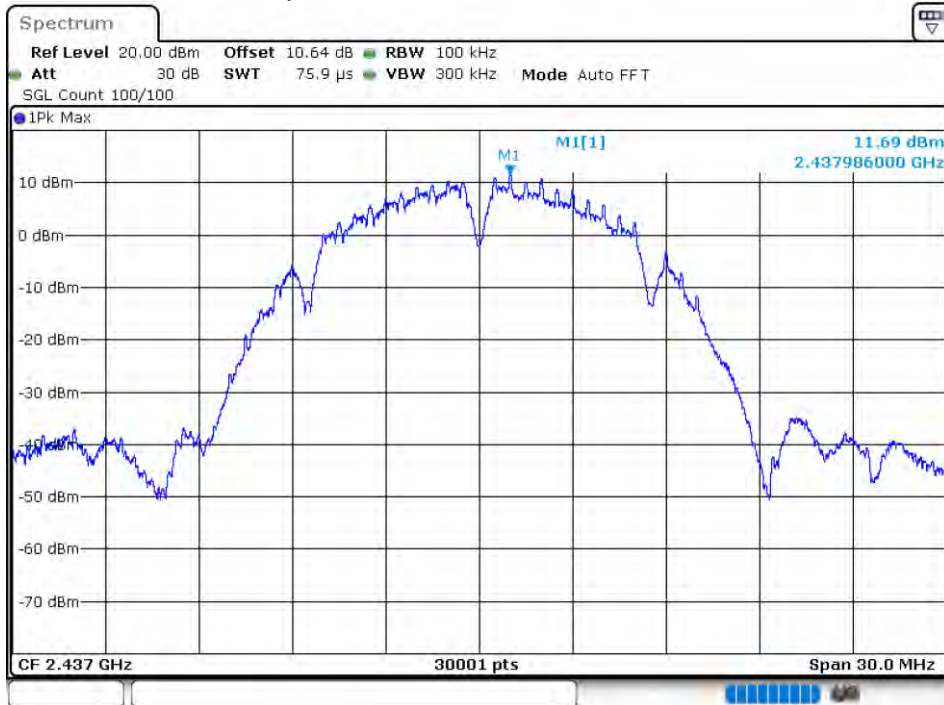


Tx. Spurious NVNT b 2437MHz Ant 2 Emission

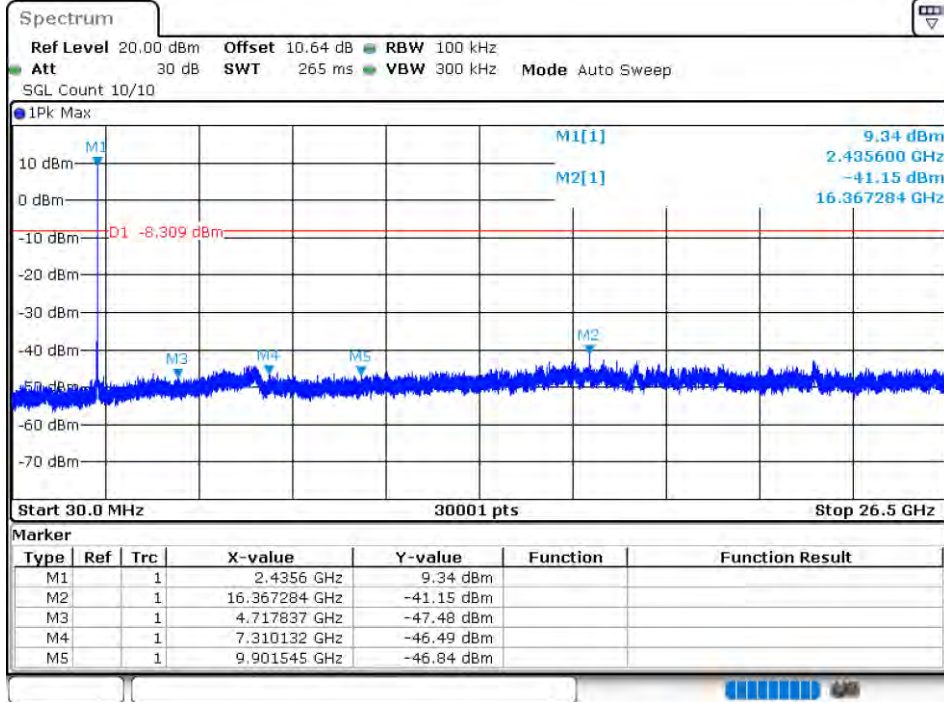


Tx. Spurious NVNT b 2462MHz Ant 2 Ref




Tx. Spurious NVNT b 2462MHz Ant 2 Emission

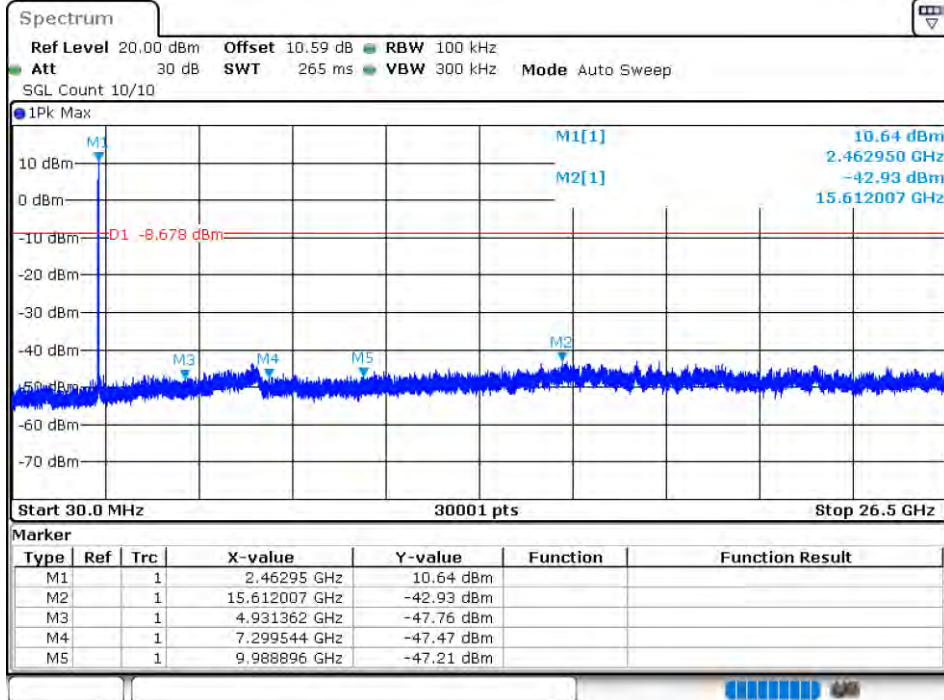


Tx. Spurious NVNT g 2412MHz Ant 1 Ref

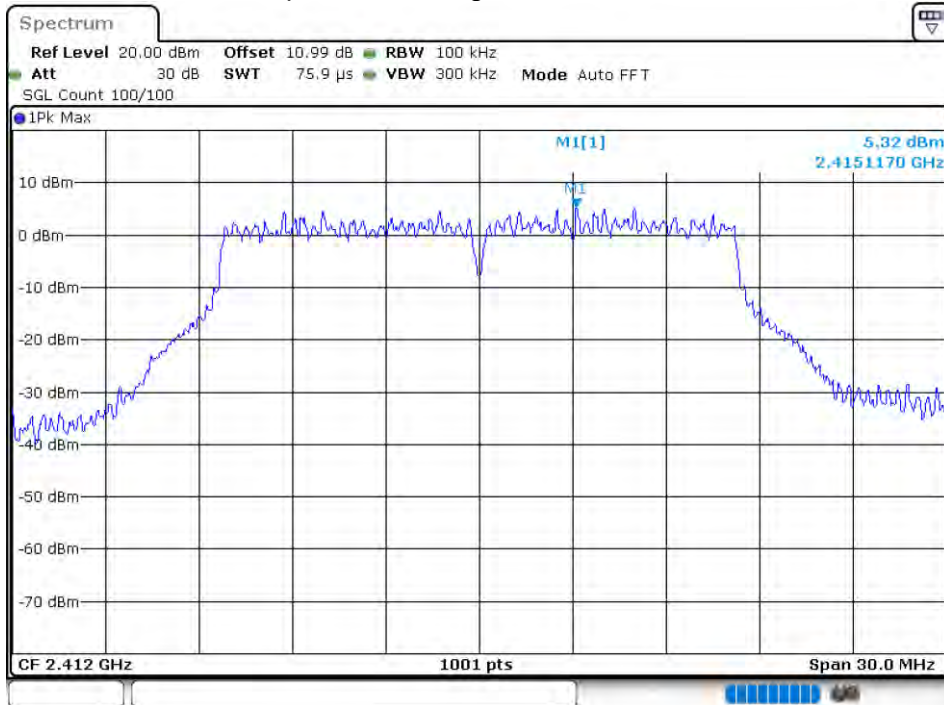


Tx. Spurious NVNT g 2412MHz Ant 1 Emission

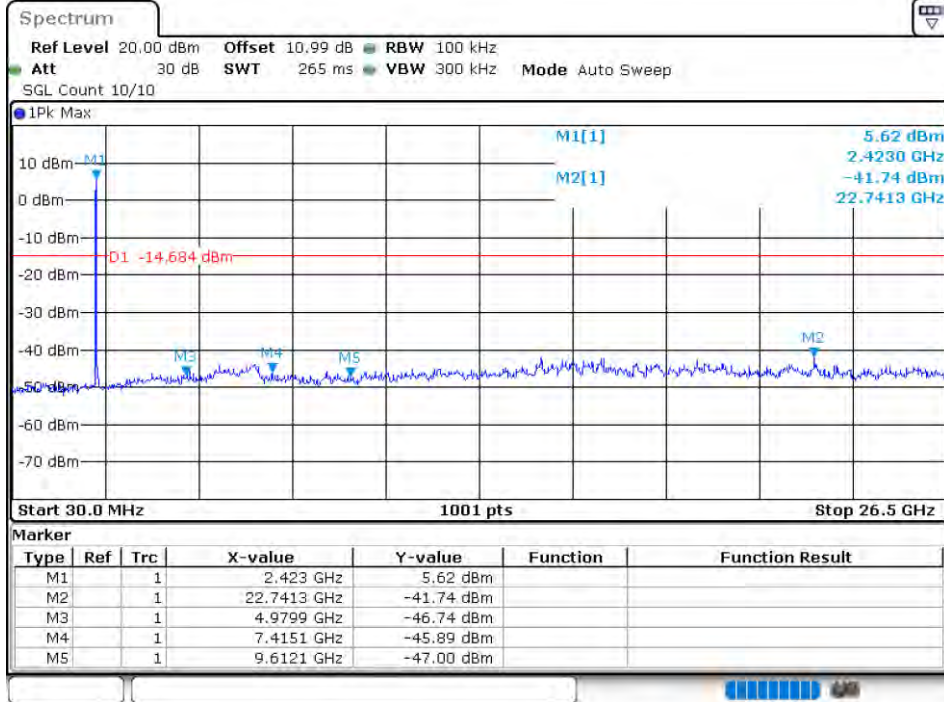


Tx. Spurious NVNT g 2437MHz Ant 1 Ref

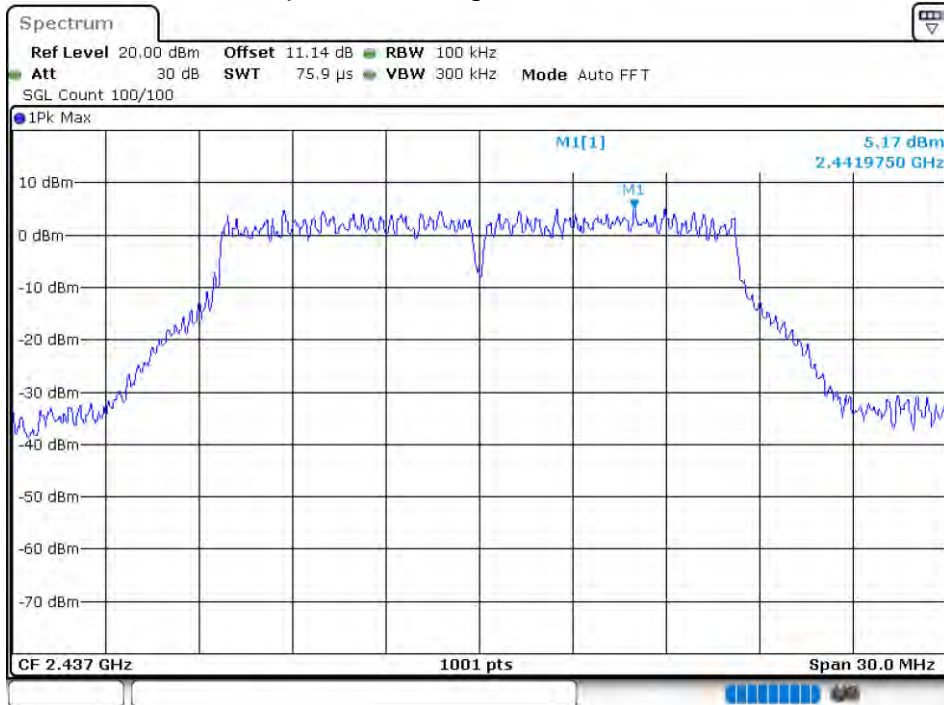


Tx. Spurious NVNT g 2437MHz Ant 1 Emission

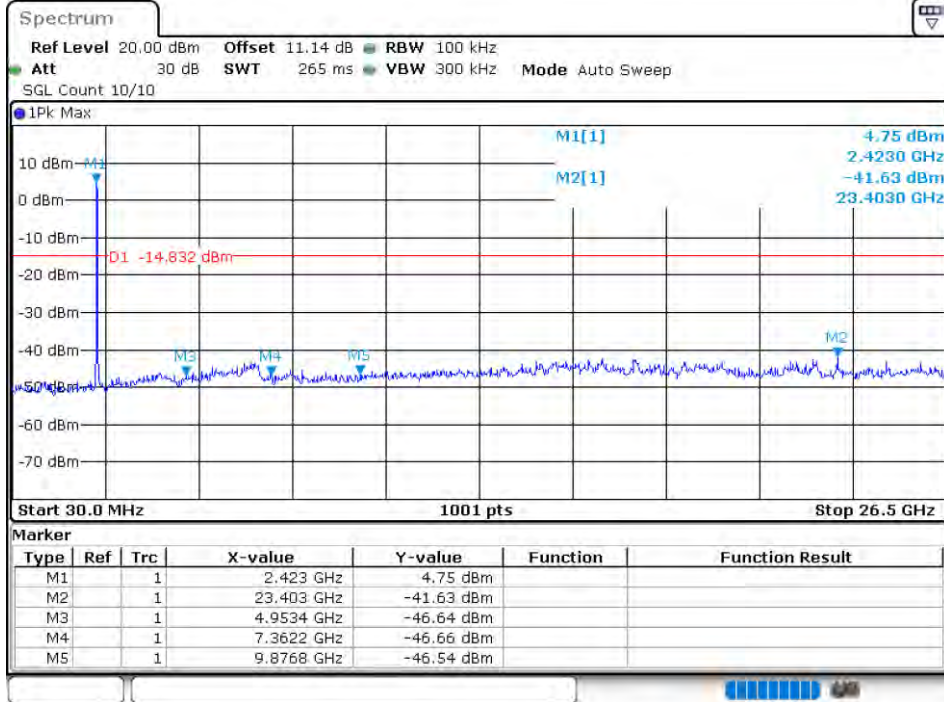


Tx. Spurious NVNT g 2462MHz Ant 1 Ref

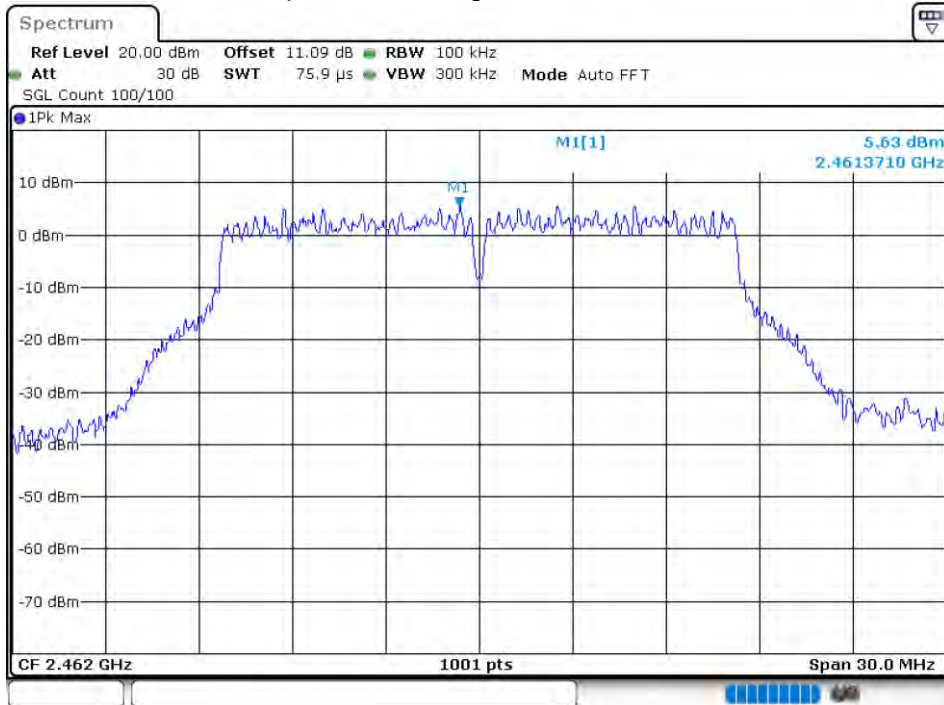


Tx. Spurious NVNT g 2462MHz Ant 1 Emission

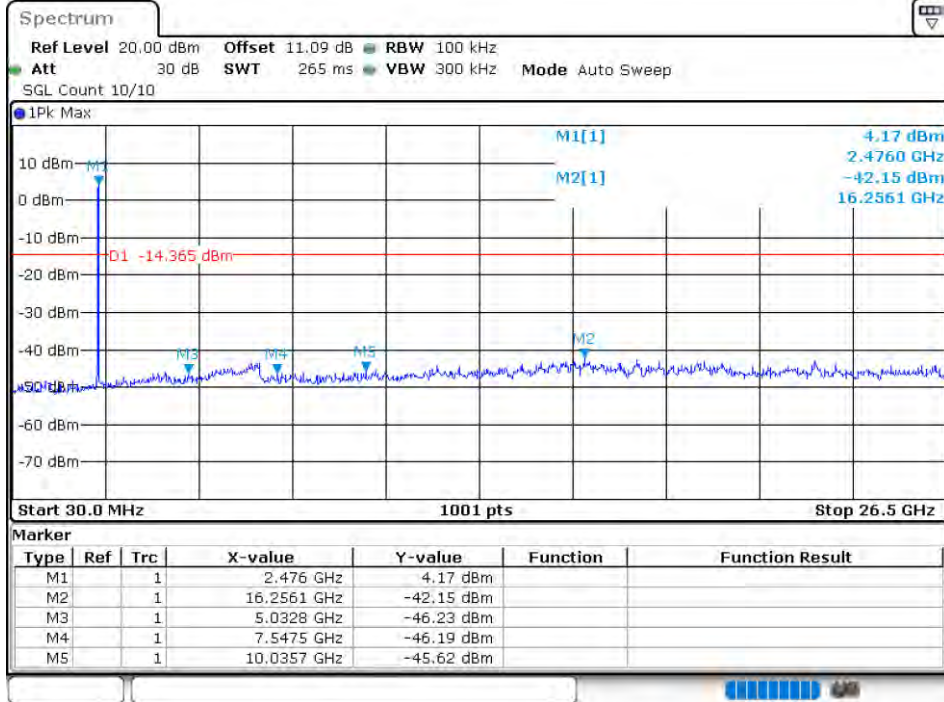


Tx. Spurious NVNT g 2412MHz Ant 2 Ref

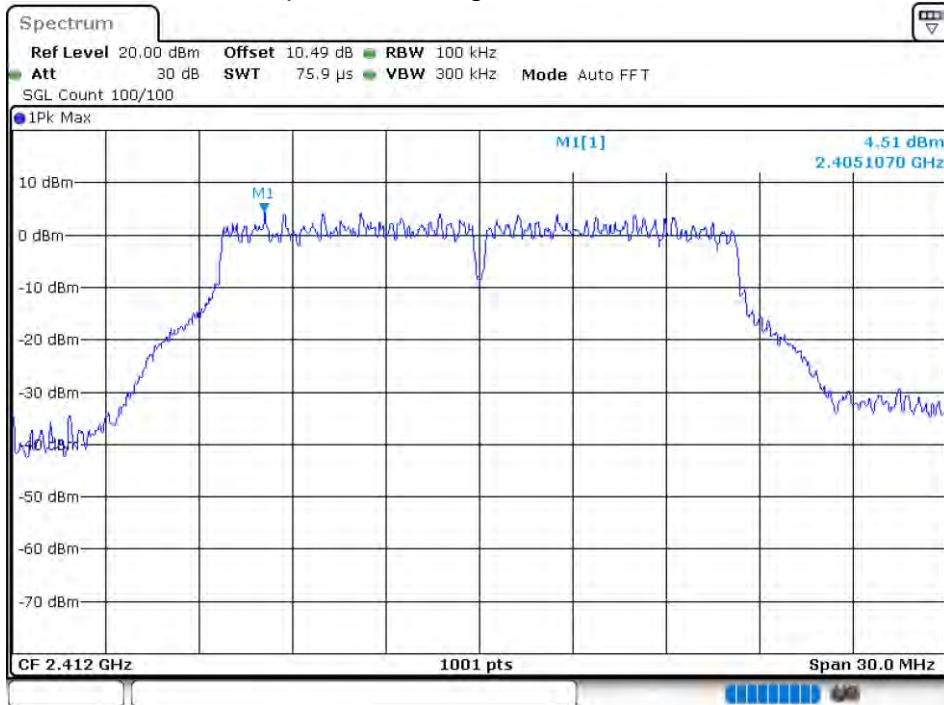


Tx. Spurious NVNT g 2412MHz Ant 2 Emission

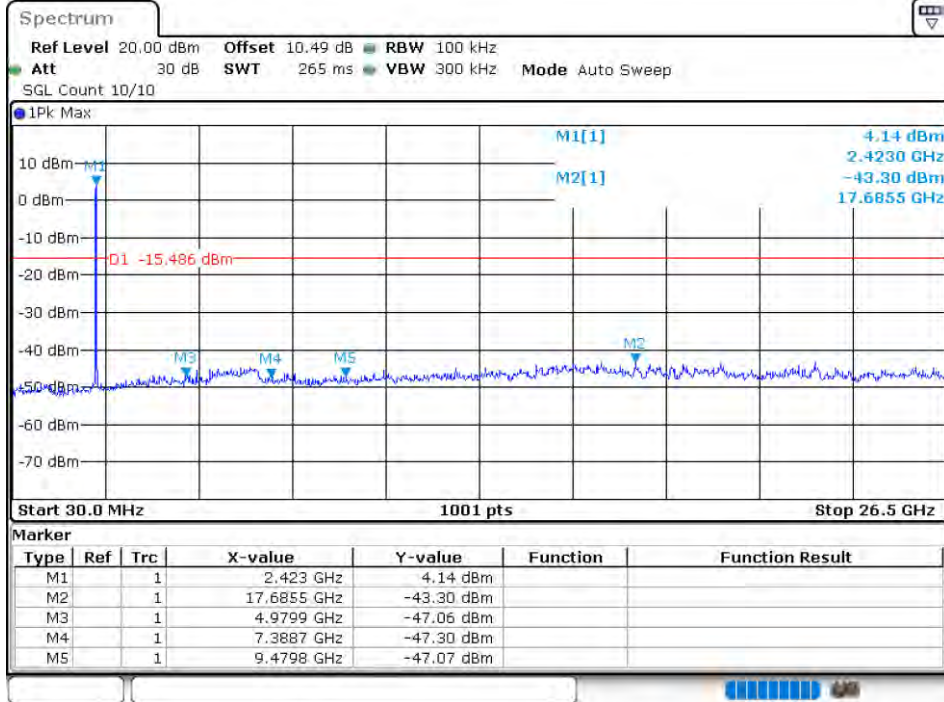


Tx. Spurious NVNT g 2437MHz Ant 2 Ref

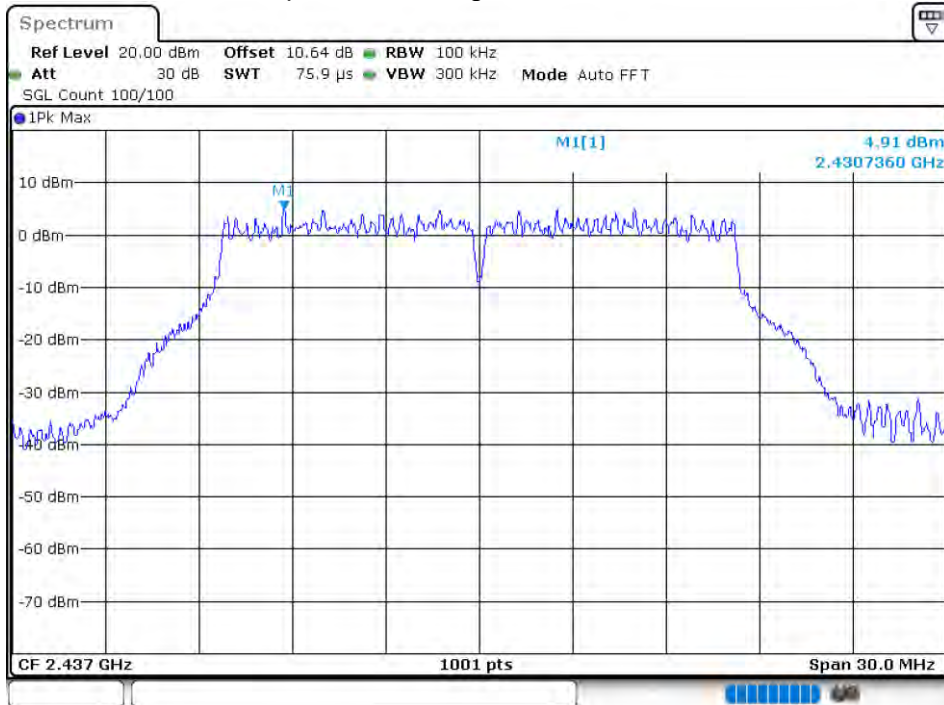


Tx. Spurious NVNT g 2437MHz Ant 2 Emission

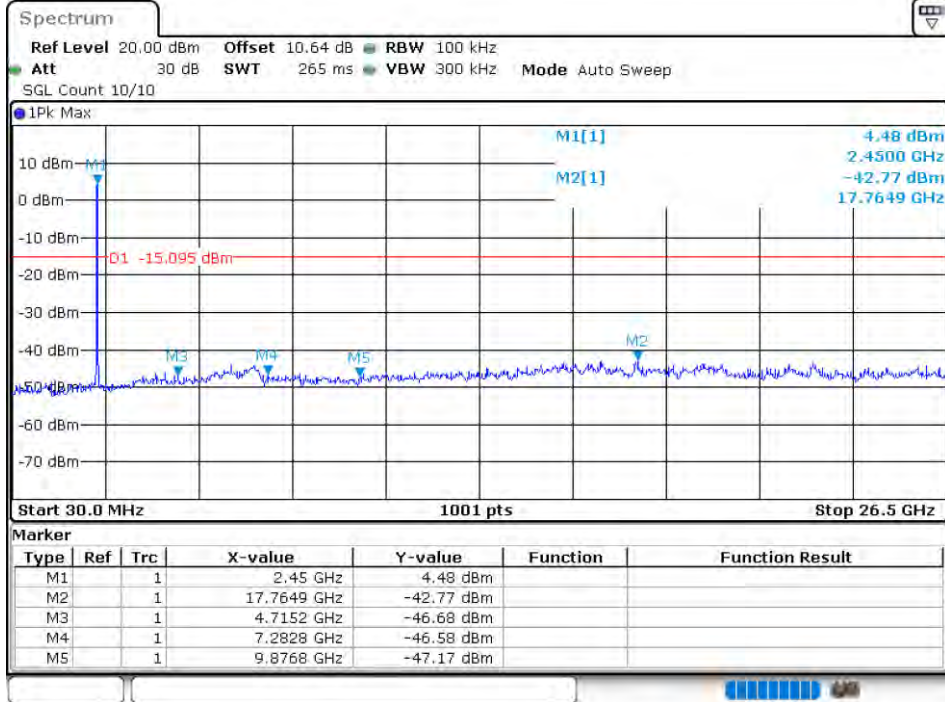


Tx. Spurious NVNT g 2462MHz Ant 2 Ref

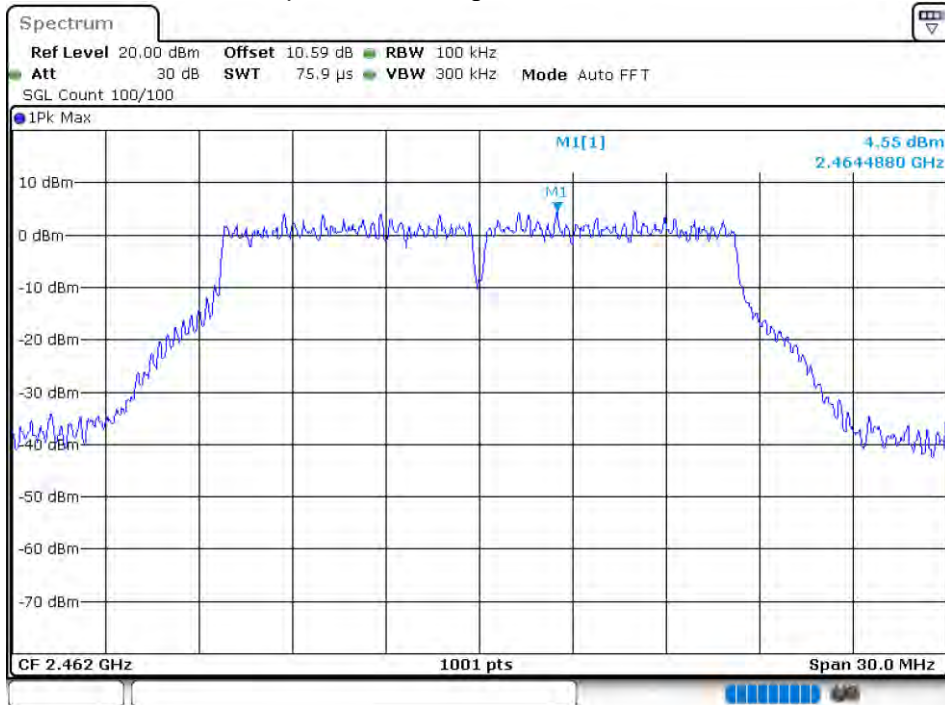


Tx. Spurious NVNT g 2462MHz Ant 2 Emission

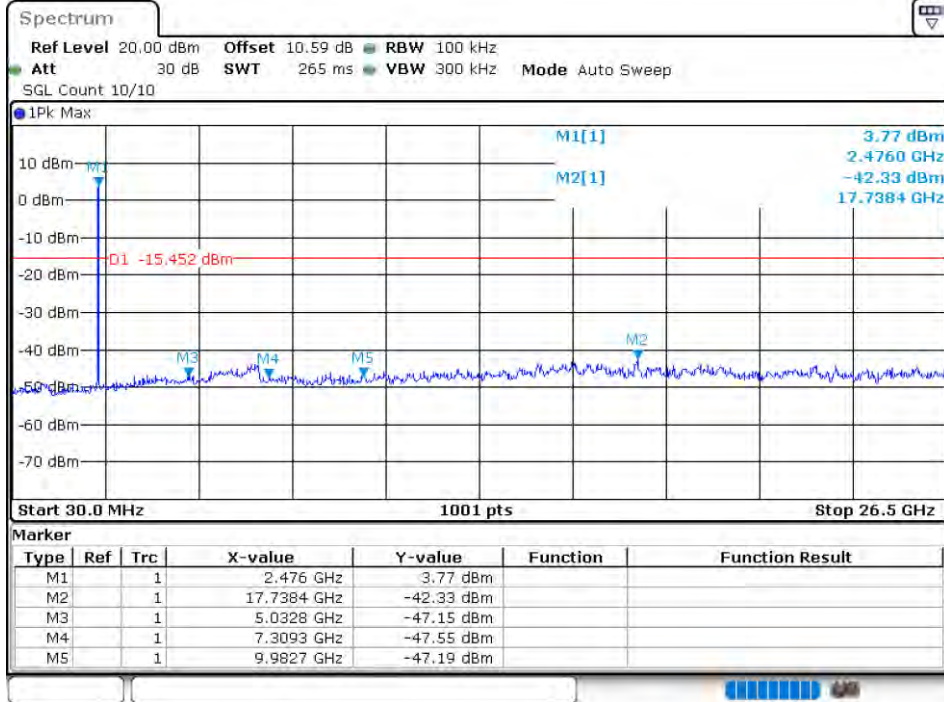


Tx. Spurious NVNT n20 2412MHz Ant 1 Ref

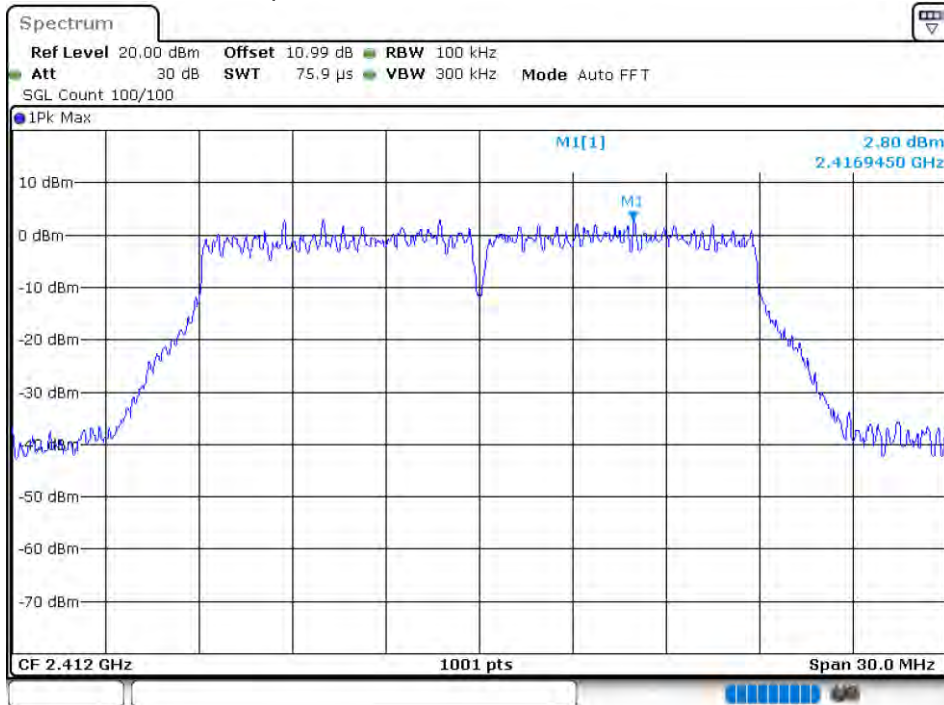


Tx. Spurious NVNT n20 2412MHz Ant 1 Emission

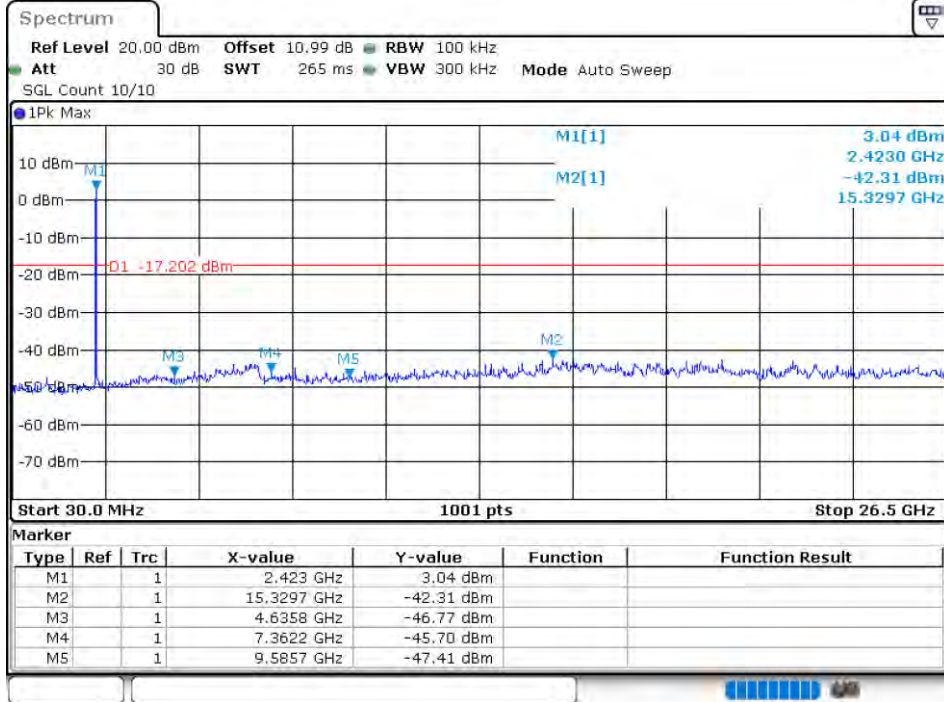


Tx. Spurious NVNT n20 2437MHz Ant 1 Ref

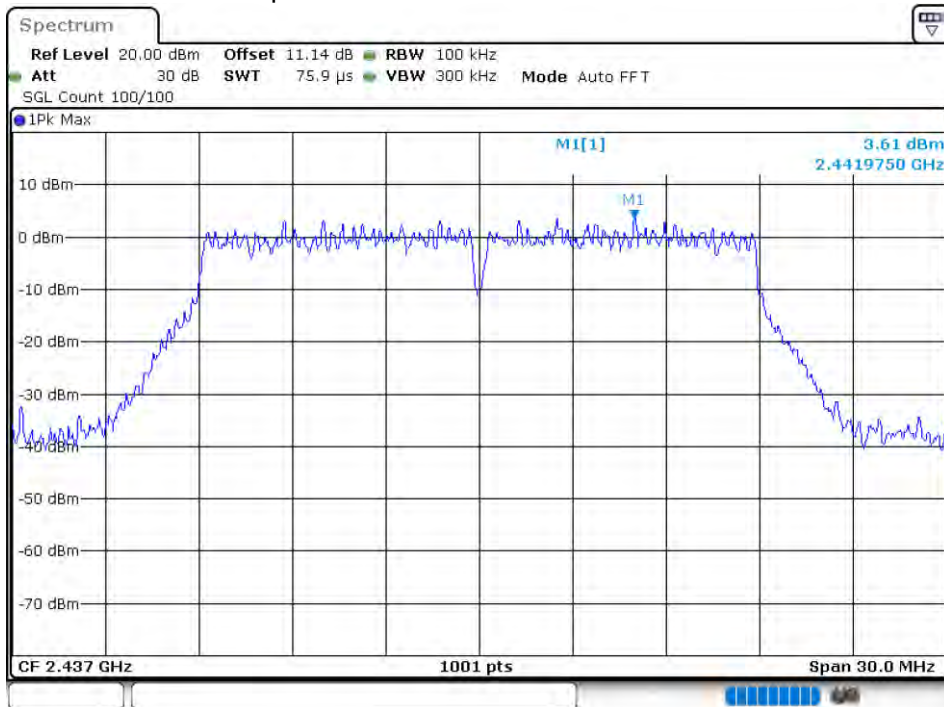


Tx. Spurious NVNT n20 2437MHz Ant 1 Emission

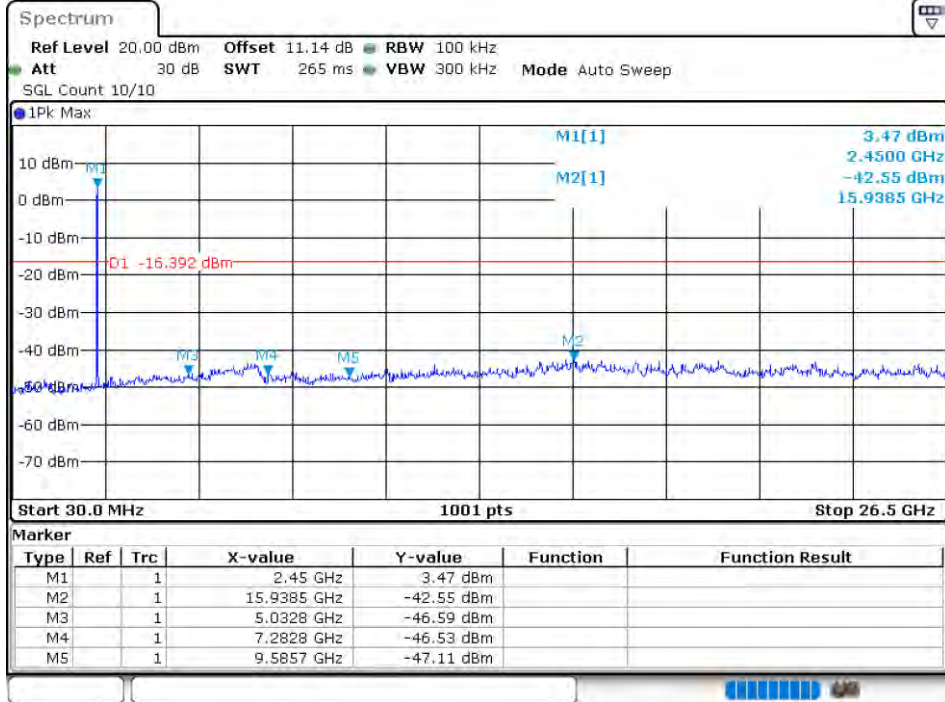


Tx. Spurious NVNT n20 2462MHz Ant 1 Ref

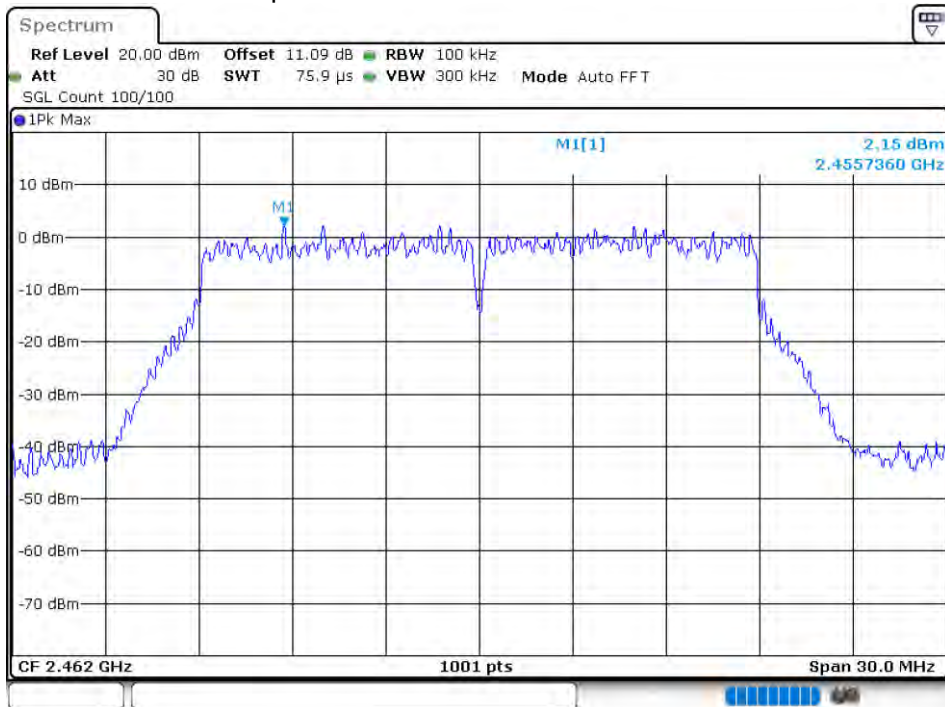


Tx. Spurious NVNT n20 2462MHz Ant 1 Emission

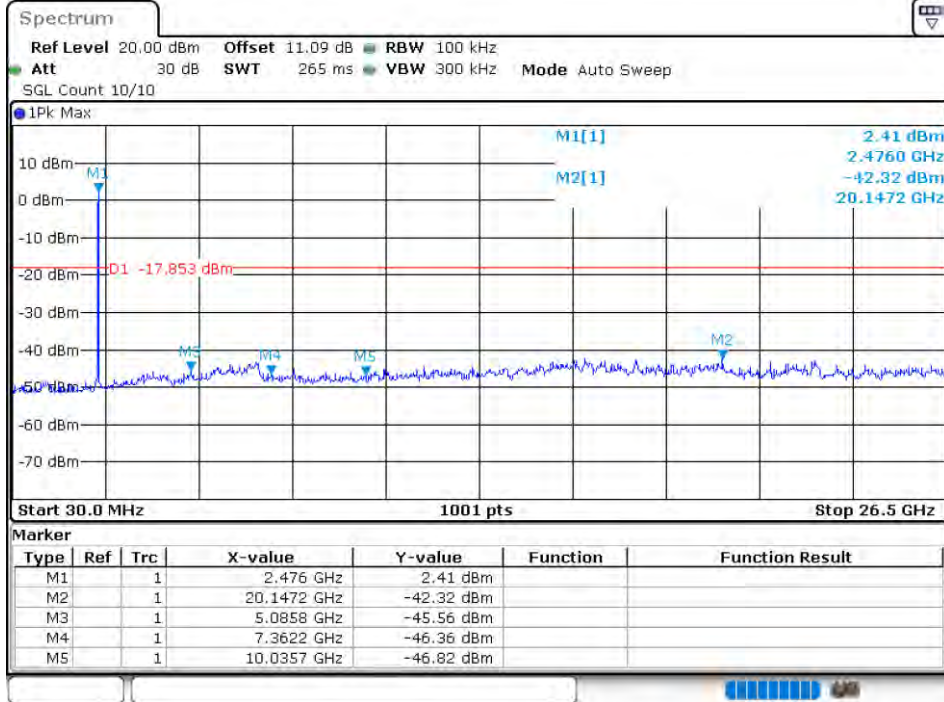


Tx. Spurious NVNT n20 2412MHz Ant 2 Ref

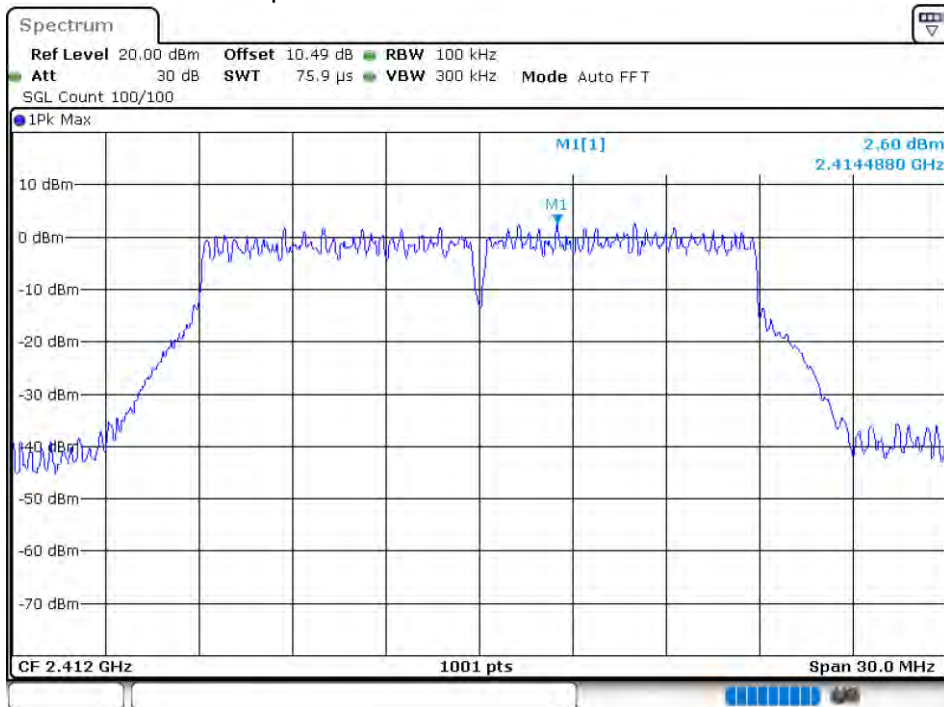


Tx. Spurious NVNT n20 2412MHz Ant 2 Emission

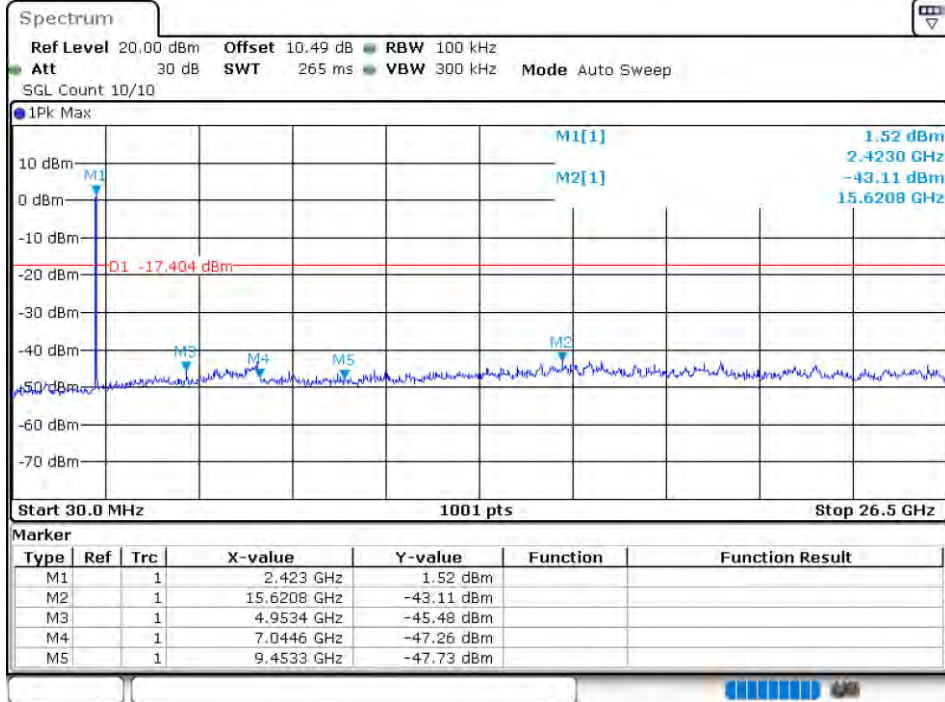


Tx. Spurious NVNT n20 2437MHz Ant 2 Ref

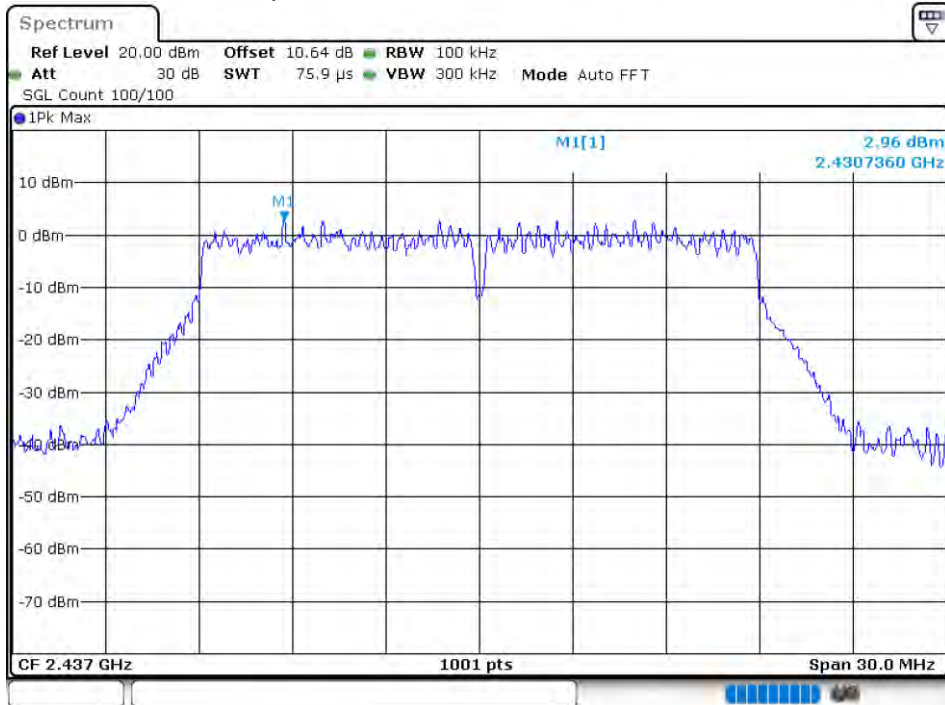


Tx. Spurious NVNT n20 2437MHz Ant 2 Emission

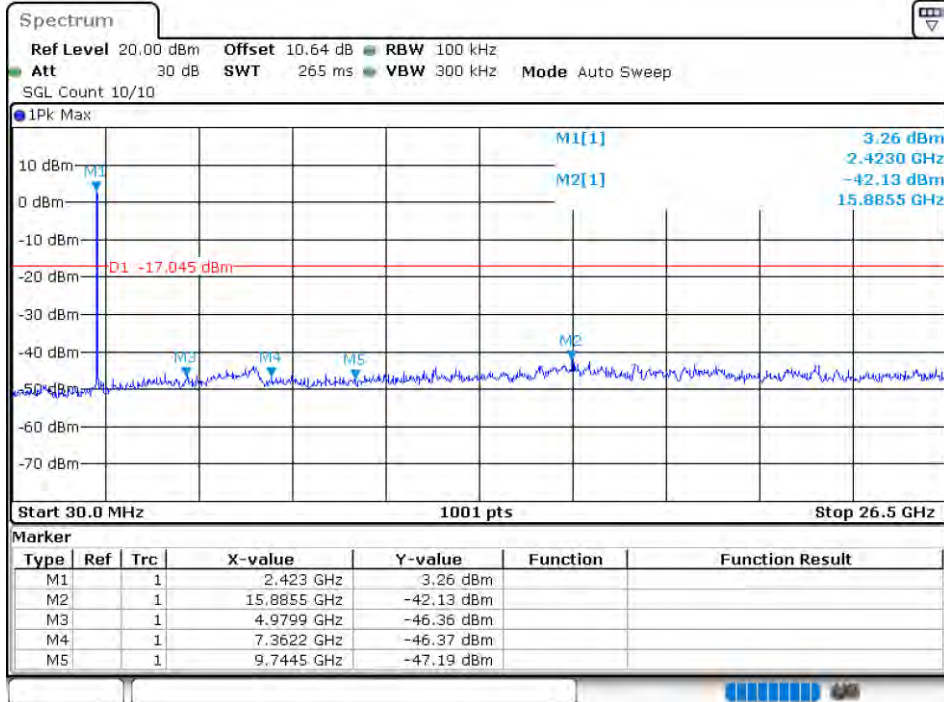

Tx. Spurious NVNT n20 2462MHz Ant 2 Ref

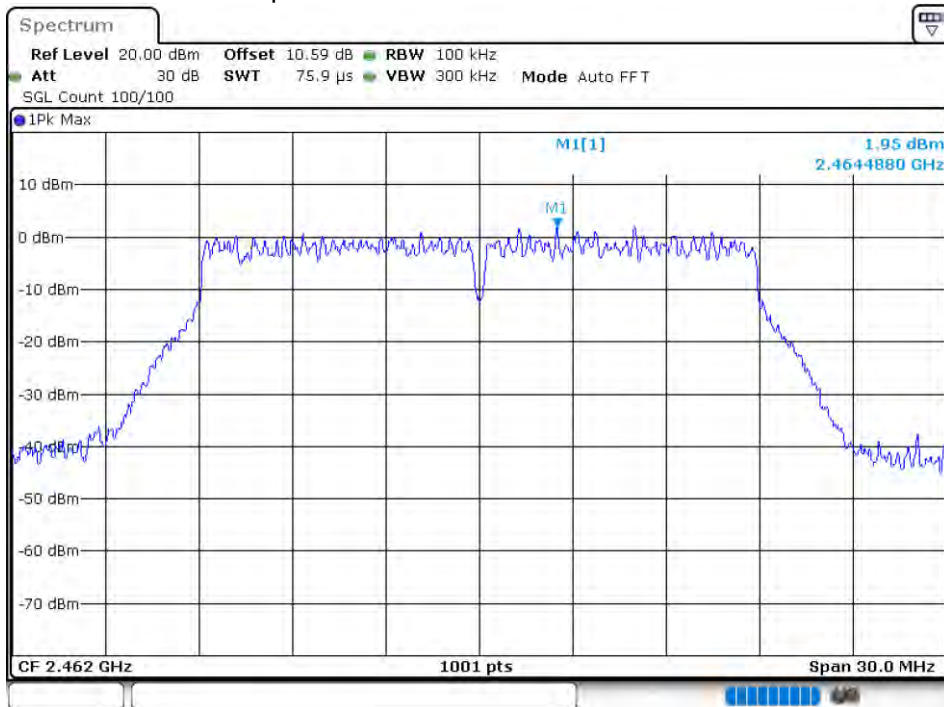

Tx. Spurious NVNT n20 2462MHz Ant 2 Emission

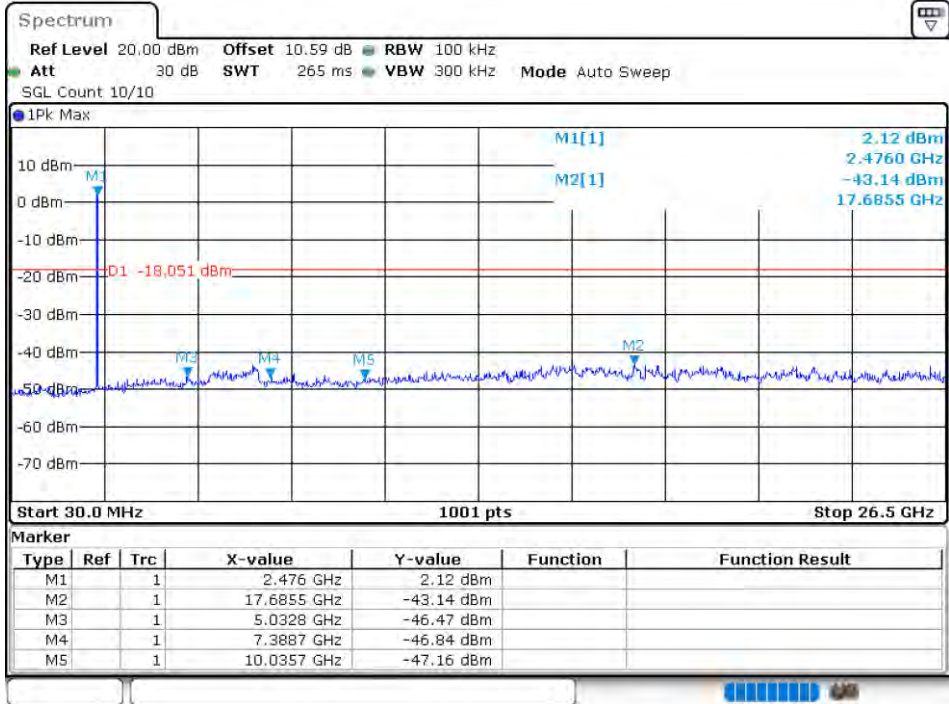

8.2 2.4G WIFI MIMO

8.2.1 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	ax20	2412	Ant1	11.11	0	11.11	30	Pass
NVNT	ax20	2412	Ant2	11.26	0	11.26	30	Pass
NVNT	ax20	2412	Sum	14.2	0	14.2	29.33	Pass
NVNT	ax20	2437	Ant1	11.33	0	11.33	30	Pass
NVNT	ax20	2437	Ant2	10.68	0	10.68	30	Pass
NVNT	ax20	2437	Sum	14.03	0	14.03	29.33	Pass
NVNT	ax20	2462	Ant1	11.52	0	11.52	30	Pass
NVNT	ax20	2462	Ant2	11.52	0	11.52	30	Pass
NVNT	ax20	2462	Sum	14.53	0	14.53	29.33	Pass
NVNT	n20	2412	Ant1	11.8	0	11.8	30	Pass
NVNT	n20	2412	Ant2	11.79	0	11.79	30	Pass
NVNT	n20	2412	Sum	14.81	0	14.81	29.33	Pass
NVNT	n20	2437	Ant1	11.95	0	11.95	30	Pass
NVNT	n20	2437	Ant2	11.41	0	11.41	30	Pass
NVNT	n20	2437	Sum	14.7	0	14.7	29.33	Pass
NVNT	n20	2462	Ant1	12	0	12	30	Pass
NVNT	n20	2462	Ant2	12.06	0	12.06	30	Pass
NVNT	n20	2462	Sum	15.04	0	15.04	29.33	Pass

8.2.2 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	ax20	2412	Ant1	-2.33	0	-2.33	8	Pass
NVNT	ax20	2412	Ant2	-2.26	0	-2.26	8	Pass
NVNT	ax20	2412	Sum	0.72	0	0.72	7.33	Pass
NVNT	ax20	2437	Ant1	-1.16	0	-1.16	8	Pass
NVNT	ax20	2437	Ant2	-2.52	0	-2.52	8	Pass
NVNT	ax20	2437	Sum	1.22	0	1.22	7.33	Pass
NVNT	ax20	2462	Ant1	-0.86	0	-0.86	8	Pass
NVNT	ax20	2462	Ant2	-1.3	0	-1.3	8	Pass
NVNT	ax20	2462	Sum	1.94	0	1.94	7.33	Pass
NVNT	n20	2412	Ant1	-12.45	0	-12.45	8	Pass
NVNT	n20	2412	Ant2	-11	0	-11	8	Pass
NVNT	n20	2412	Sum	-8.65	0	-8.65	7.33	Pass
NVNT	n20	2437	Ant1	-11.78	0	-11.78	8	Pass
NVNT	n20	2437	Ant2	-12.24	0	-12.24	8	Pass
NVNT	n20	2437	Sum	-8.99	0	-8.99	7.33	Pass
NVNT	n20	2462	Ant1	-12.27	0	-12.27	8	Pass
NVNT	n20	2462	Ant2	-12.36	0	-12.36	8	Pass
NVNT	n20	2462	Sum	-9.3	0	-9.3	7.33	Pass

Test Graphs


PSD NVNT ax20 2412MHz Ant1

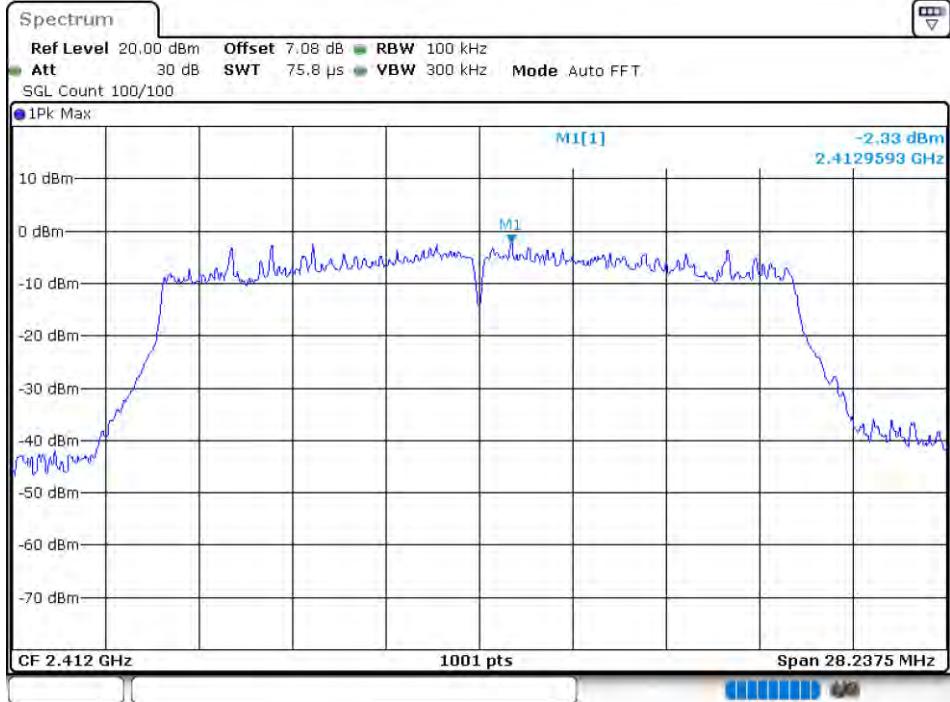


PSD NVNT ax20 2412MHz Ant2

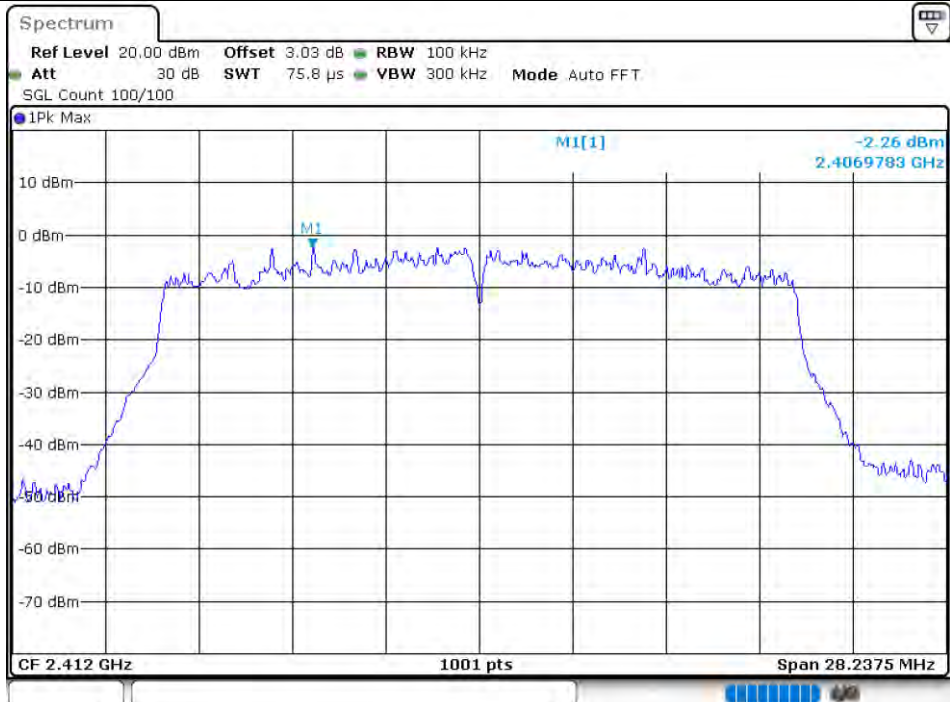


PSD NVNT ax20 2437MHz Ant1

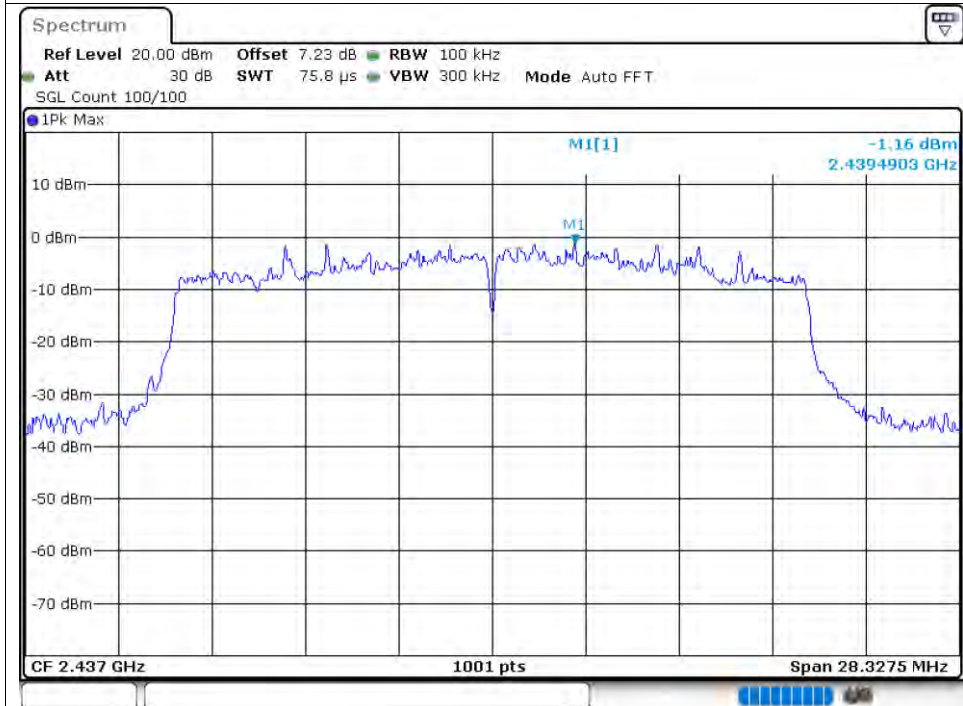


PSD NVNT ax20 2437MHz Ant2

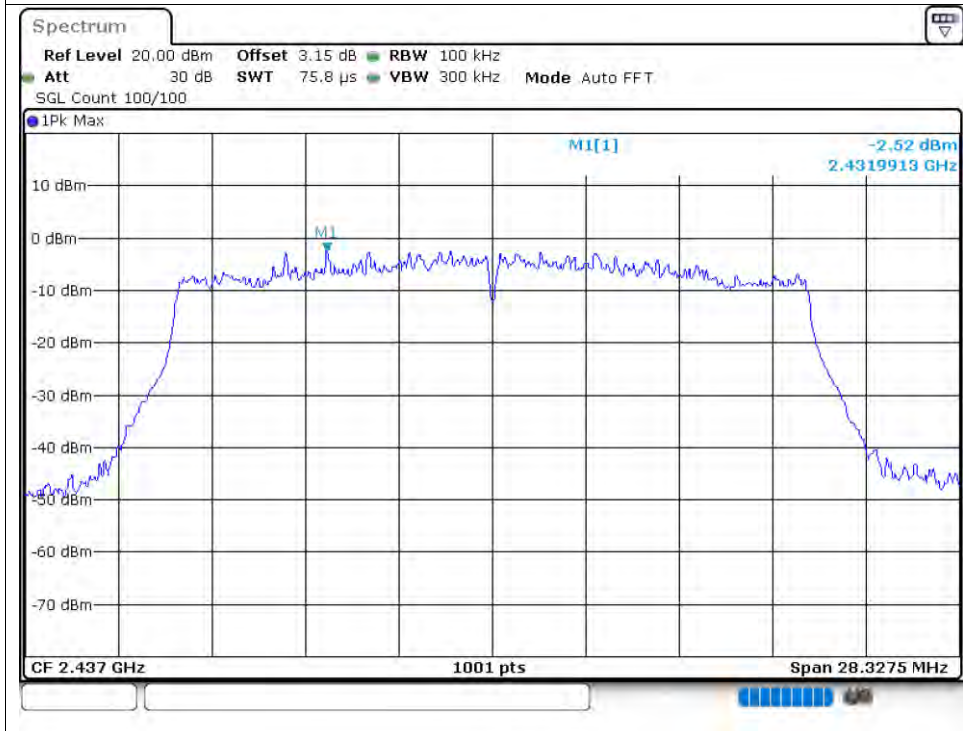


PSD NVNT ax20 2462MHz Ant1

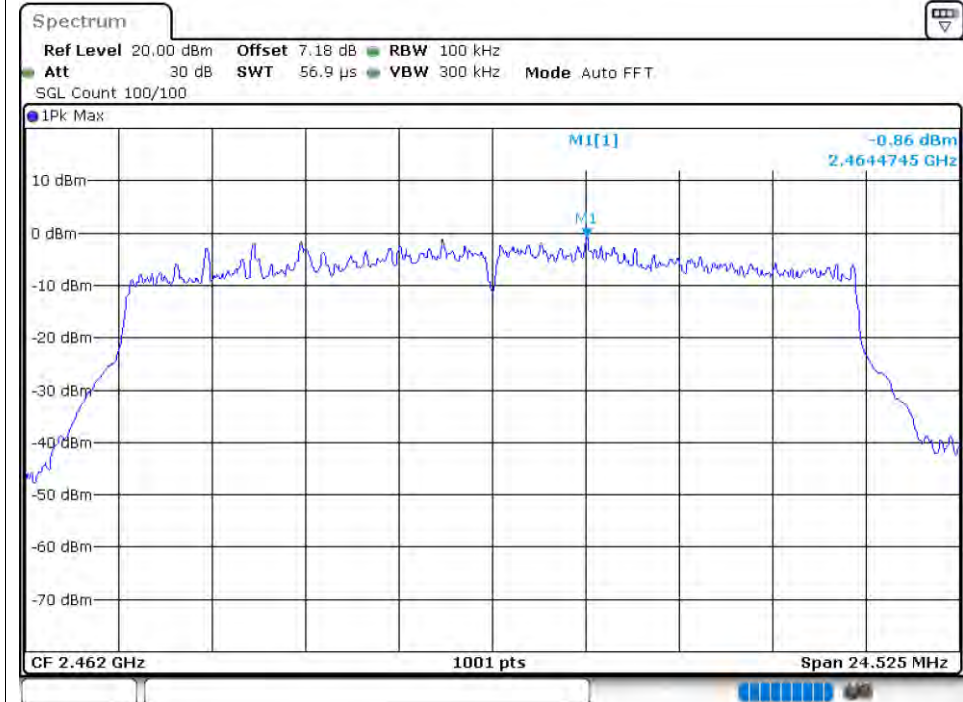


PSD NVNT ax20 2462MHz Ant2

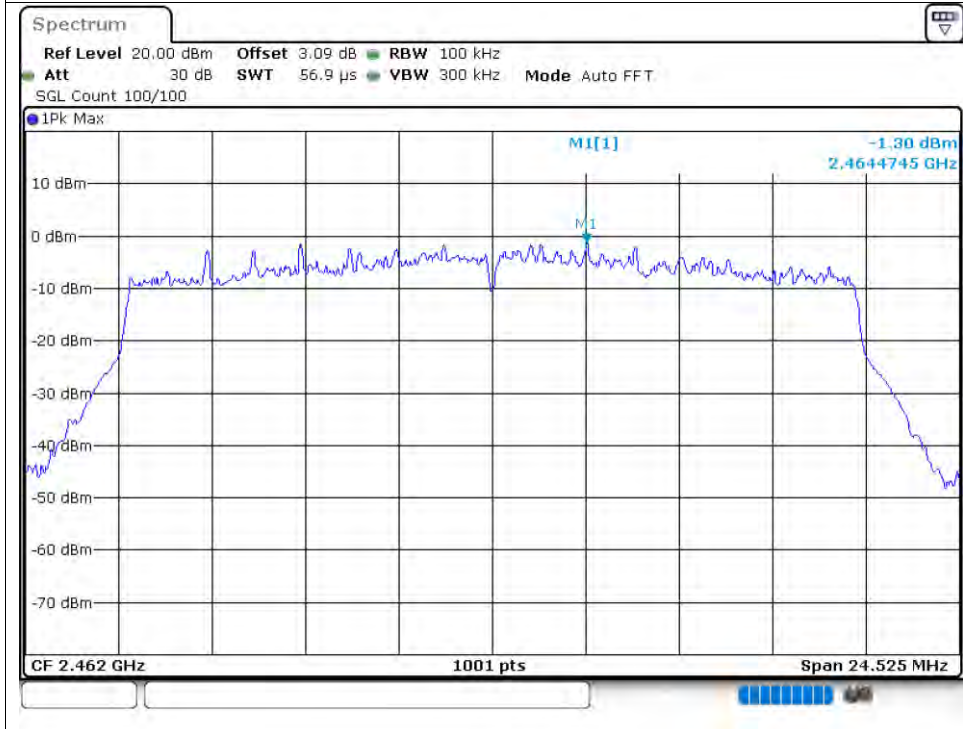


PSD NVNT n20 2412MHz Ant1

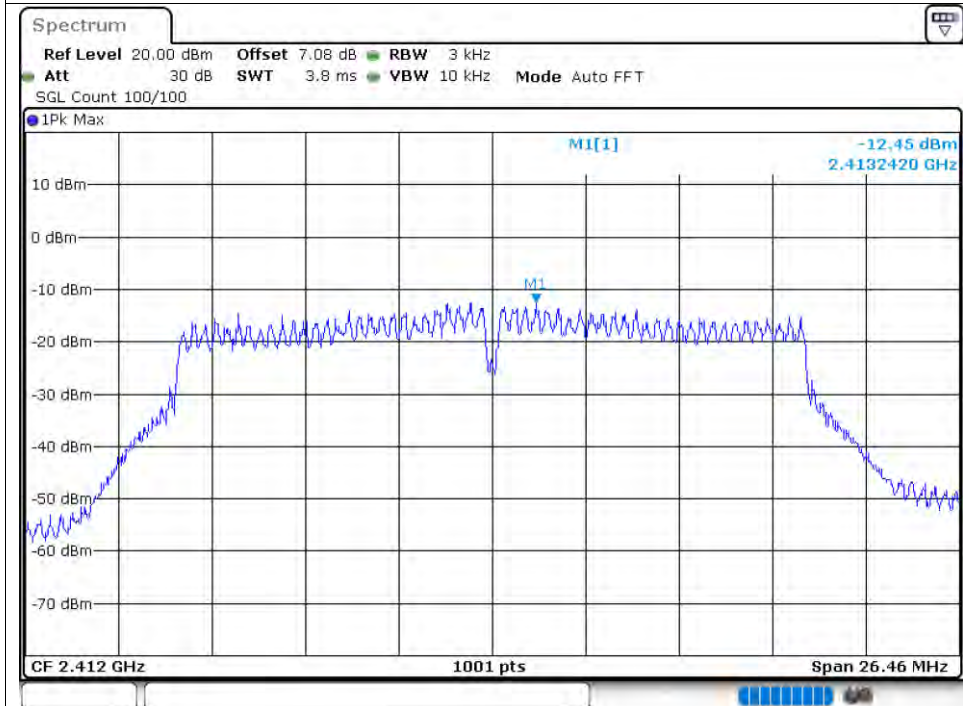


PSD NVNT n20 2412MHz Ant2

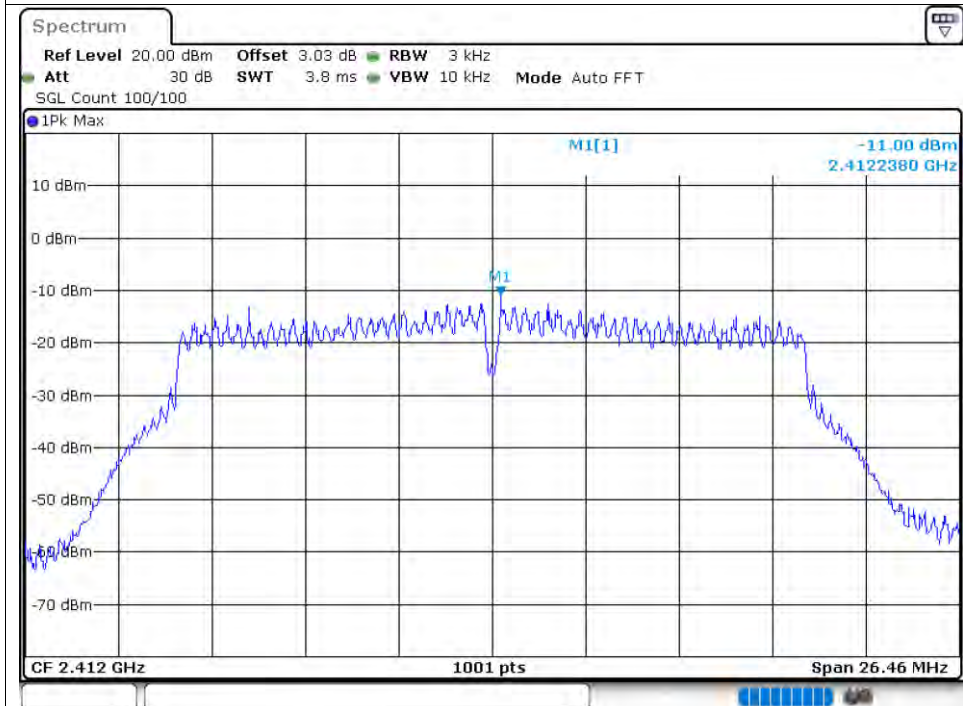


PSD NVNT n20 2437MHz Ant1

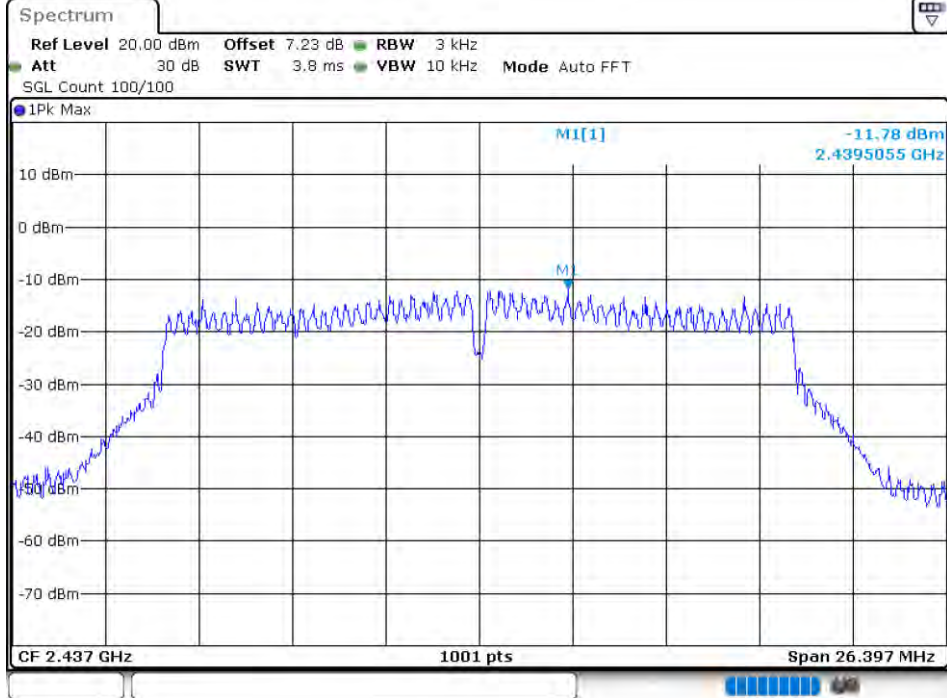


PSD NVNT n20 2437MHz Ant2

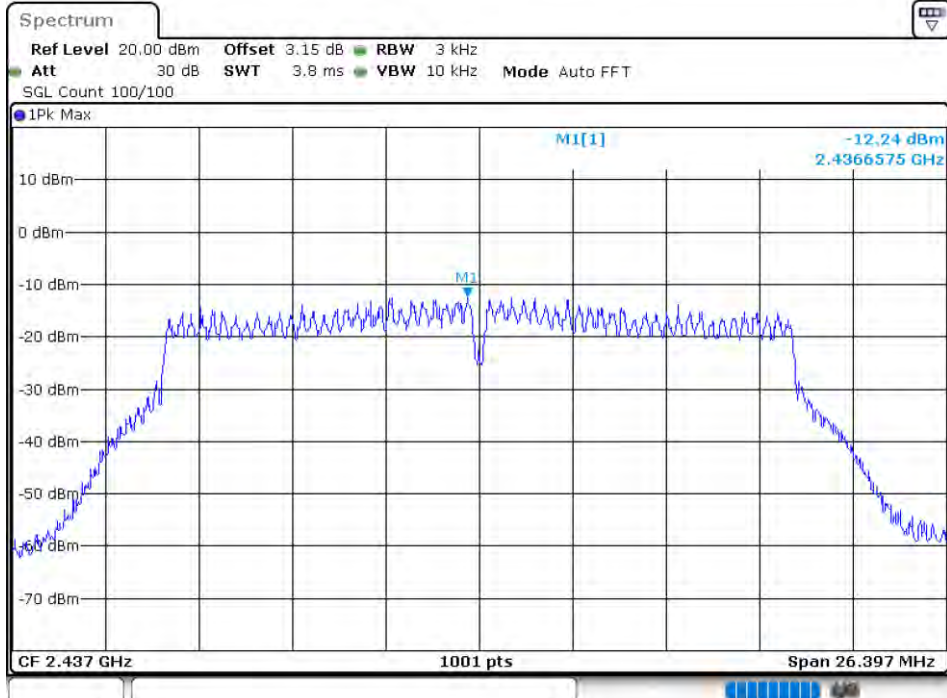

PSD NVNT n20 2462MHz Ant1

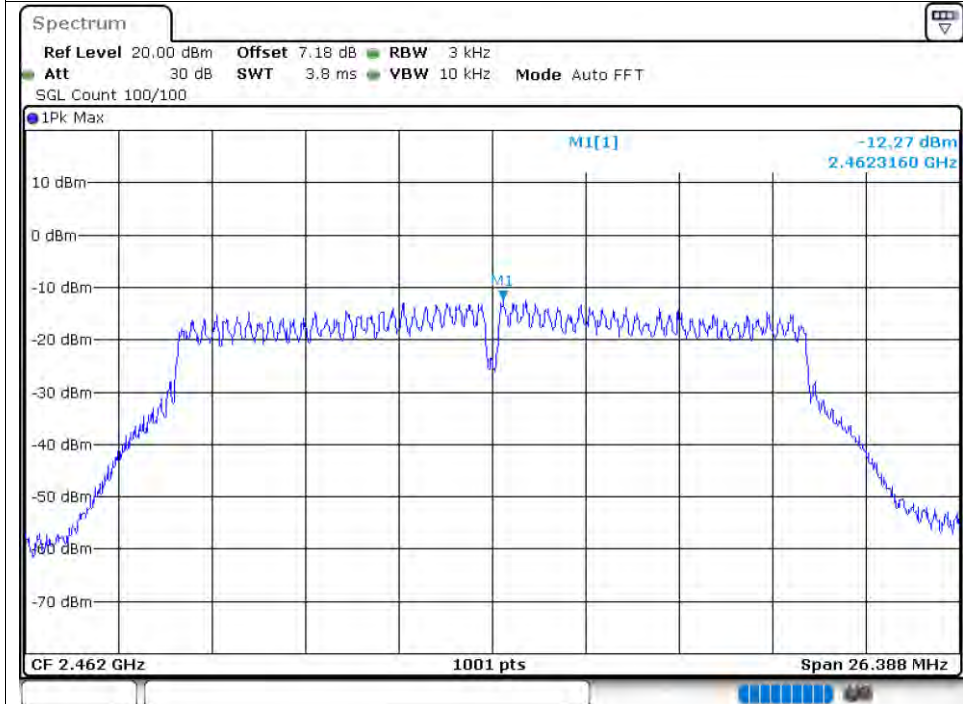

PSD NVNT n20 2462MHz Ant2

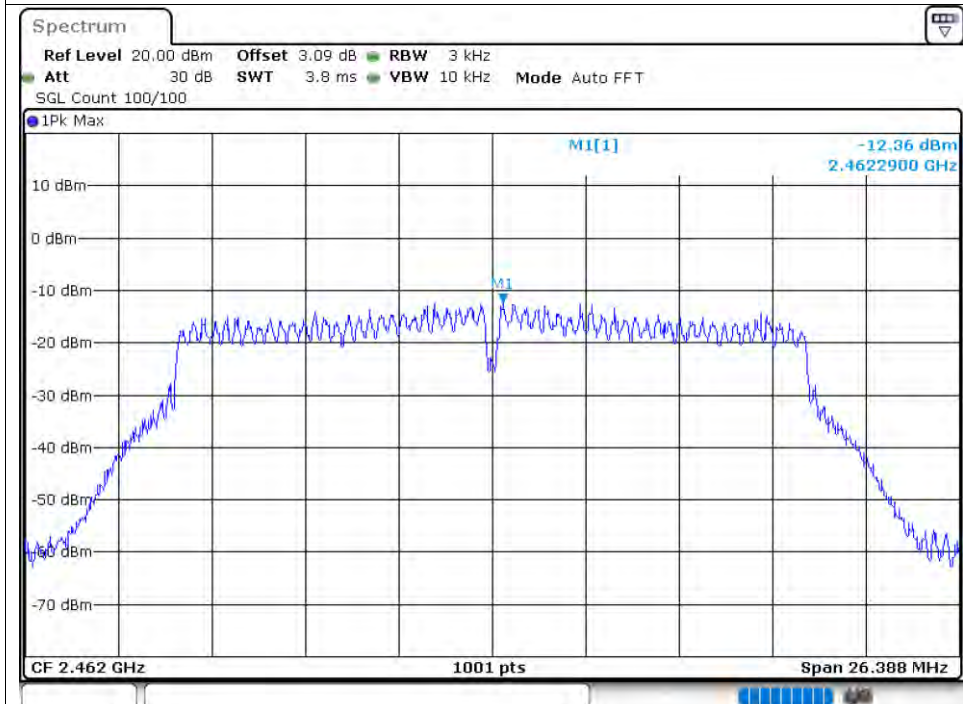

END OF REPORT