


Live Sound Card User Manual

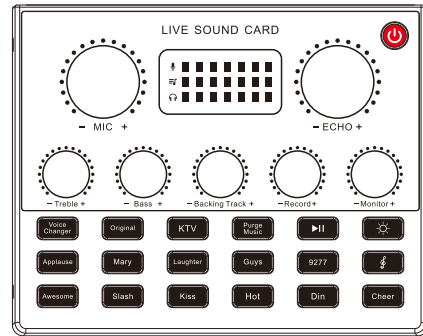

I. Product profile

Hello, dear customer. Thank you for buying our products.
Before formal use, please read the manual carefully to ensure the correct use of this product and the proper preservation of the manual for future use. This product is a professional singing live mixer, built-in digital DSP chip: support all live broadcast platform, support mixing switch, simple input mute control, reverberation melodies, text quality shouting wheat, special effect sound, TYPE-C computer connection, perfect to solve the diverse needs of mobile phone and computer live users!

II. Packaging list host

Sound card x1
Data line x1
Live line x2
Product description product x1

III. System requirements


Android, IOS, Windows are fully compatible

IV. Software support

Sing APP: national Kou, cool I sing, KuGou music, Baidu music, sing bar, sing and so on.

Live broadcast APP: Reflecting guests, Pepper, YY, Douyu, The whole people TV, Kuaishou, TikTok, Tiger teeth and so on.

V. Schematic diagram of the mainframe

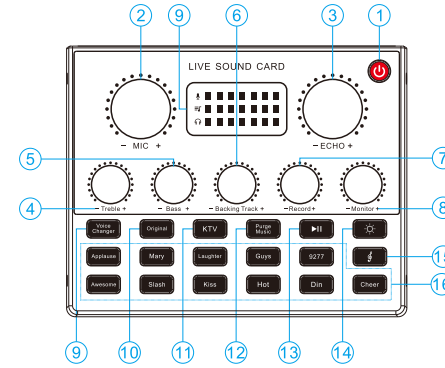

1. Power supply: Press the power key for three seconds to switch on, turn on the working indicator white.
2. Mic: Adjust the volume of the microphone, and the indicator light of the microphone will change accordingly.
3. ECHO: Adjust the volume of the reverb, the reverb indicator will change accordingly.
4. Treble: Adjust the high pitch of the microphone, push down to reduce the high pitch, and push up to increase the high pitch.
5. Bass: Adjust the microphone's bass by pushing it down to decrease the bass, and pushing it up to increase the bass.
6. Backing Track: Adjust the volume of the accompaniment, accompaniment indicator will change accordingly.
7. Record: Adjust the recording volume, the recording sound will change accordingly.
8. Monitor: Adjust the monitor volume, the monitor sound will change accordingly.

9. Voice Change: There are 4 voice changing modes together.

10. Original: Scene mode, the indicator light flashes to indicate that it has switched to this mode.

11. KTV: Scene mode, the indicator light flashes to indicate that it has switched to this mode.


12. Purge Music: When turned on, the vocals in the computer or external accompaniment and Bluetooth accompaniment will be eliminated, and when turned off, the vocals in the accompaniment will be retained; (requires a stereo source).

13. Play/pause: When using the Bluetooth connected sound card to play accompaniment music, you can play/pause the accompaniment.

14. Lamplight: Press the light of the On/Off button.

15. Bluetooth: When turned on, the indicator light flashes, turn on the device and search for "K600" to connect, after the connection is successful, the indicator light is always on, and it can be used normally.

16. Special effect sound: Contains 11 special effects sounds, short press to play different sound effects.




- A. Charging: This interface can charge the sound card or connect to a mobile phone or computer for OTG live streaming
B. LIVE1: Connect to mobile phone live broadcast, recording, singing.
C. LIVE2: Connect to mobile phone live broadcast, recording, singing.
D. Earphone: Headphones connected to 3.5mm plugs.
E. Headset: The headset connected to the 3.5mm plug.
F. MIC1: capacitor wheat connected to 3.5mm plug.
G. MIC2: capacitor wheat connected to 3.5mm plug.
H. Backing Track: The accompaniment line connected to the 3.5mm plug.

VI. Specification parameters


Specification parameter			
Channel system	Output sampling rate	Sampling bits	Use scene
Double channel	44.1KHZ	16bit	Home Outdoor
Weight	Knob	Button	Size
215g	7 piece	19 piece	135*107*42MM
Indicator		USB and live interface	Audio interface
62 piece		Digital communication / charge / live accompaniment	Accompaniment, musical instrument, earphone, headset, condenser microphone
Main battery specification			
Capacity	Electricity consumption	Charging voltage	Charging current
800mAh	220mA	DC 5V	1A

VII. schematic diagram of the connection process


1. Mobile phone recording, live broadcast

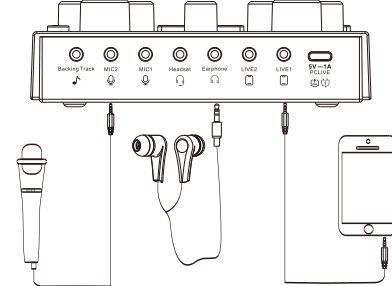


2. Dual mobile phone live broadcast

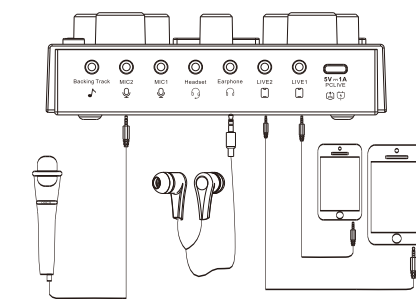


3. Mobile phone live computer accompaniment

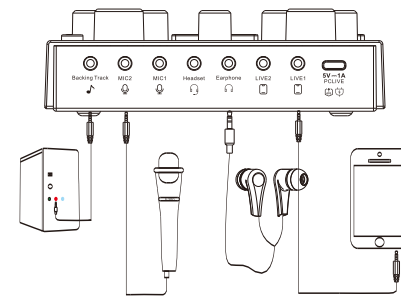

4. Computer live broadcast

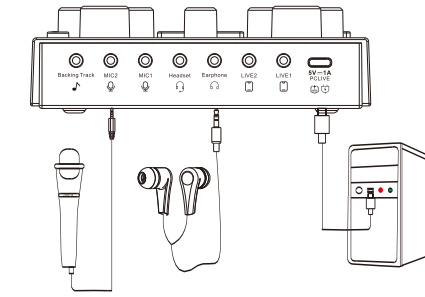

VIII. Computer accompaniment and computer live debugging diagram

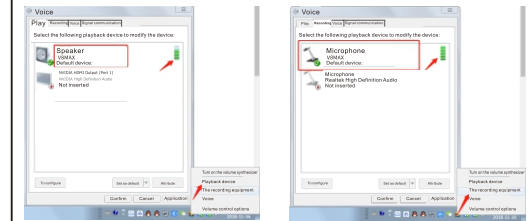


After the sound card is connected to the computer and the computer has recognized the sound card

(1) connect the computer to the host computer with the Micro USB cable, click the small horn in the lower right corner of the computer, and right-click to open the "playback device". If the loudspeaker shows "V8MAX" and is the default device, that is, the sound card driver has been installed successfully and has been recognized by the computer.

(2) Computers or other devices that support OTG function and standard USB protocol all support connection with sound card.

IX. Charging connection

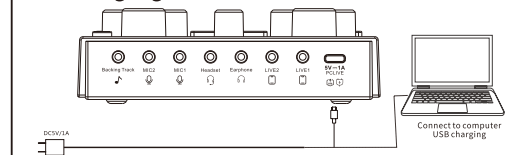

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.