

Meas1.Head Left Cheek GSM 850 Ch190

Date: 2025/9/27

Communication System Band: Exported from older format (data unavailable - please correct).;

Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.322$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.952 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.309 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.588 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.6%

Maximum value of SAR (measured) = 0.945 W/kg

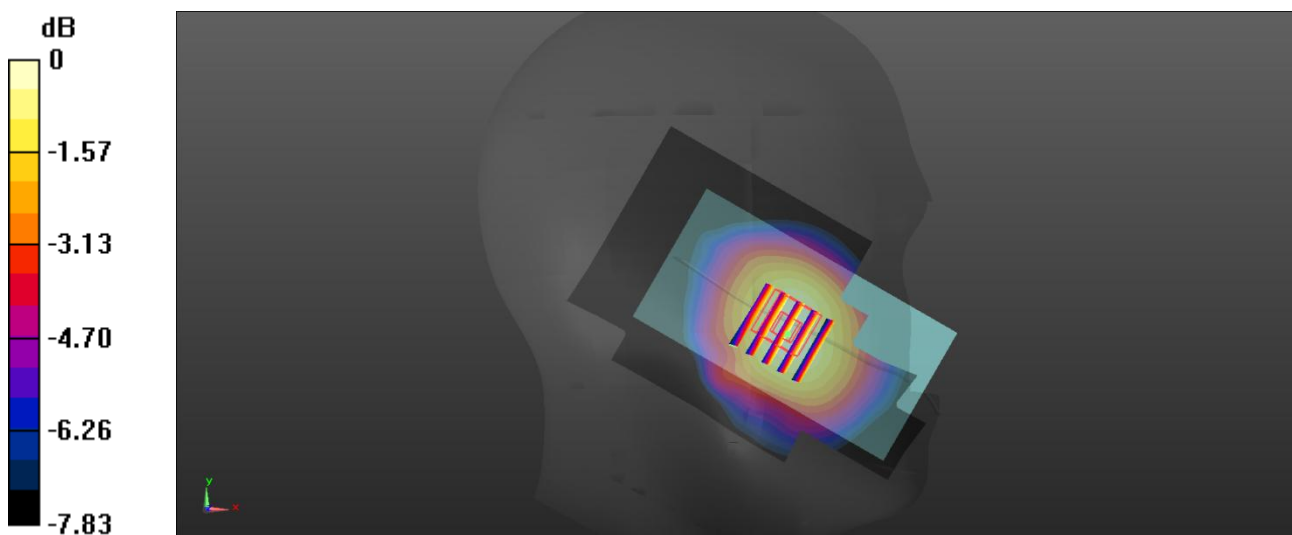

0 dB = 0.945 W/kg

Meas2.Body-worn&Hotspot Left side 10mm GSM 850 Ch190

Date: 2025/9/27

Communication System Band: Exported from older format (data unavailable - please correct).;

Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.322$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.24 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.89 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.977 W/kg; SAR(10 g) = 0.709 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 69.1%

Maximum value of SAR (measured) = 1.26 W/kg

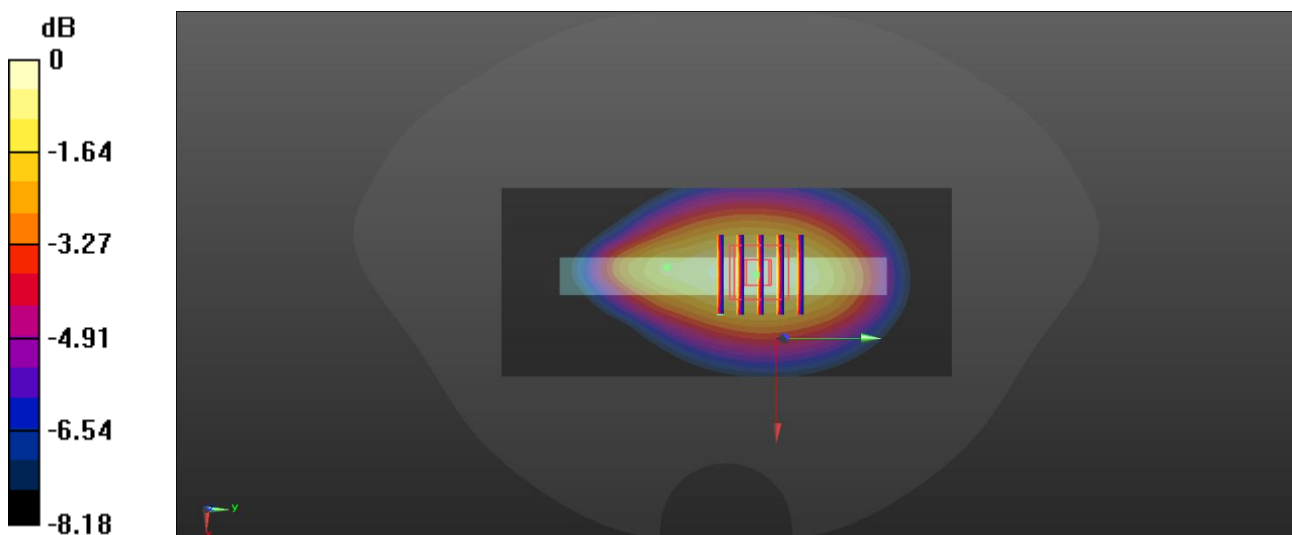

0 dB = 1.26 W/kg

Meas3.Head Left Cheek GSM 1900 Ch661

Date: 2025/9/29

Communication System Band: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.703 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.056 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 66.9%

Maximum value of SAR (measured) = 0.717 W/kg

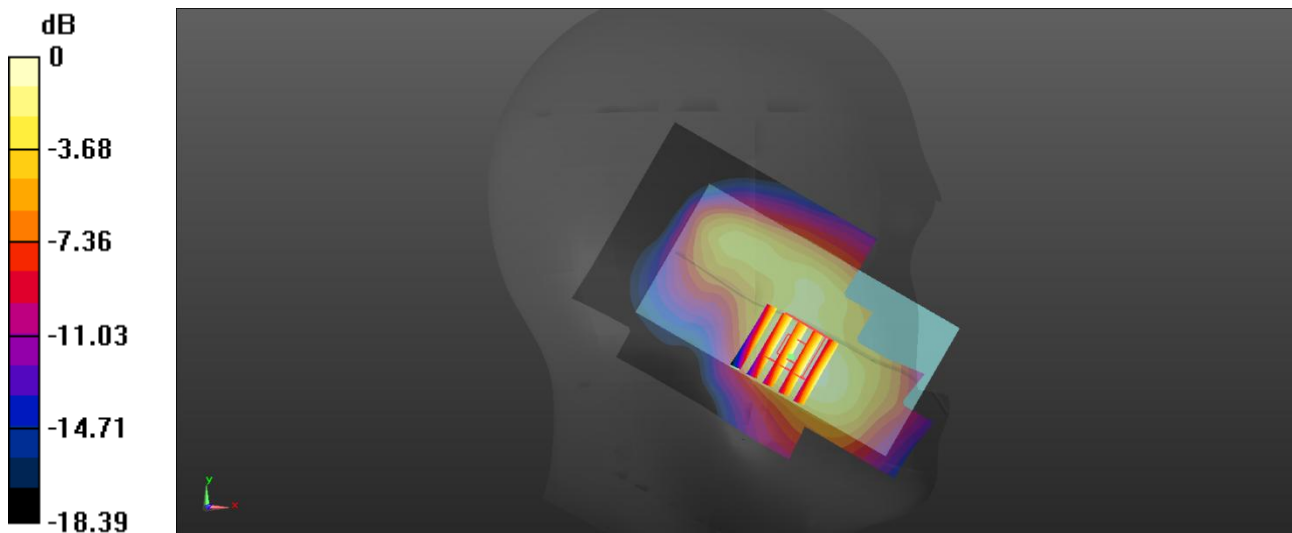

0 dB = 0.717 W/kg

Meas4.Body-worn&Hotspot Back side 10mm GSM 1900 Ch512

Date: 2025/9/29

Communication System Band: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 38.986$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch512/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.49 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.46 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.606 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 1.42 W/kg

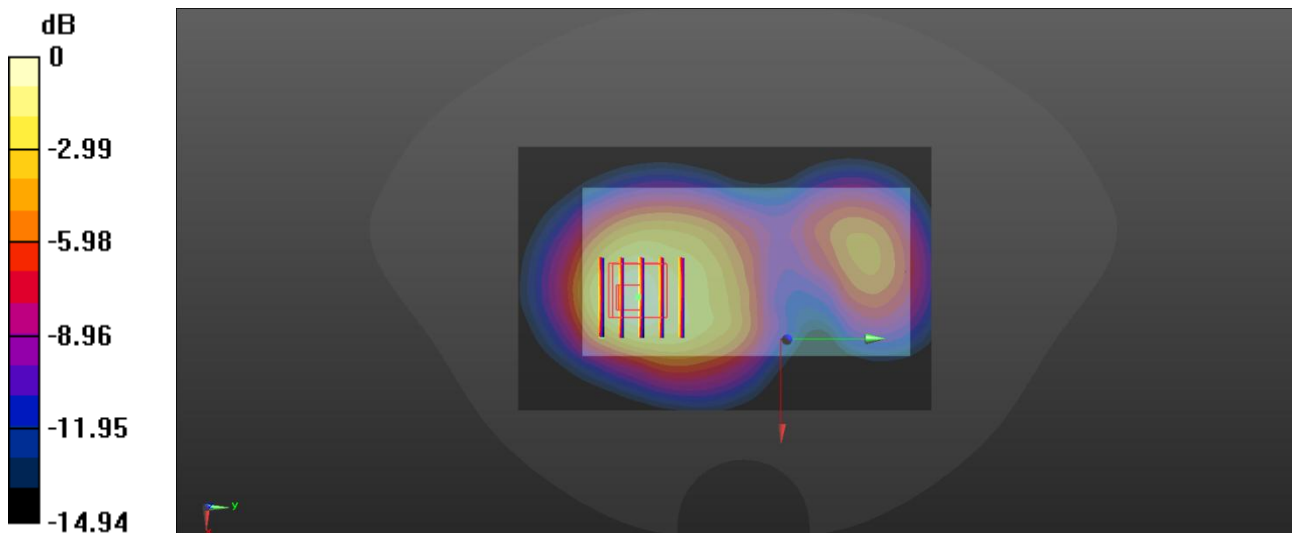

0 dB = 1.42 W/kg

Meas5.Head Left Cheek WCDMA B2 Ch9400

Date: 2025/9/29

Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.457 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.712 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.537 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 68.3%

Maximum value of SAR (measured) = 0.465 W/kg

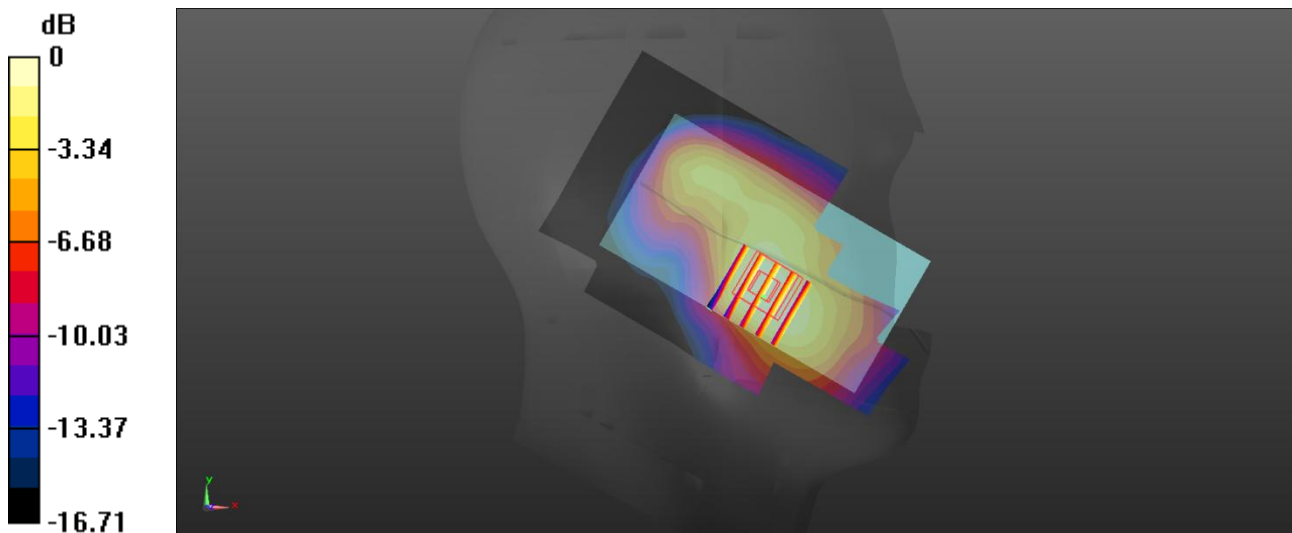

0 dB = 0.465 W/kg

Meas6.Body-worn&Hotspot Back side 10mm WCDMA B2 Ch9400

Date: 2025/9/29

Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.589 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.18 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.250 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.594 W/kg

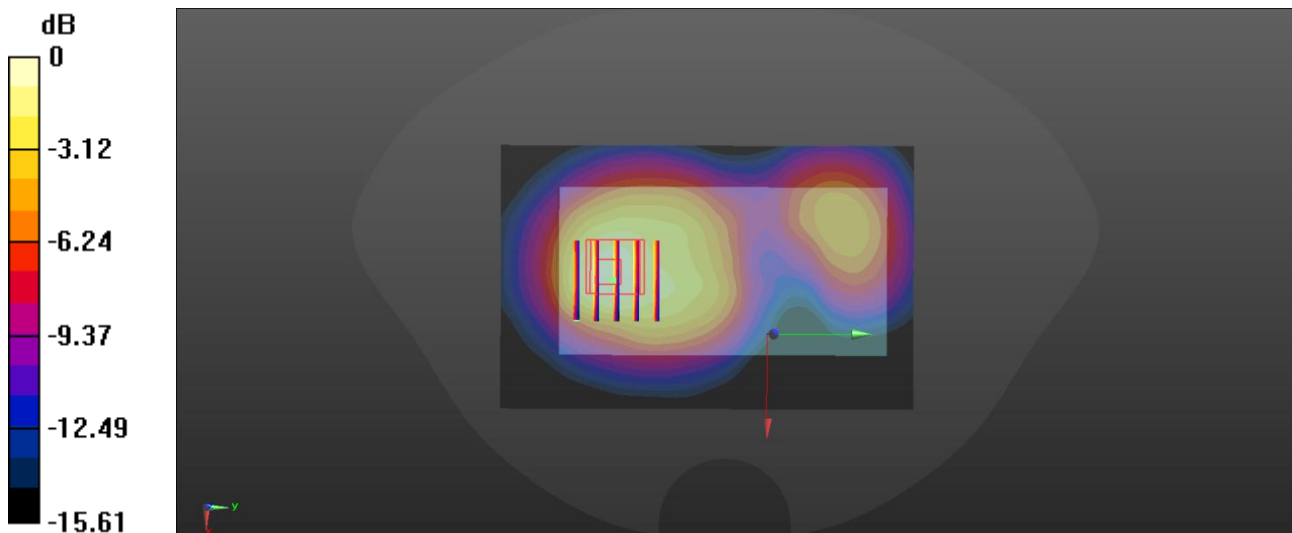

0 dB = 0.594 W/kg

Meas7.Head Right Cheek WCDMA B4 Ch1413

Date: 2025/9/28

Communication System Band: Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.267$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.87, 8.87, 8.87); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1413/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.516 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.841 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.569 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 74.5%

Maximum value of SAR (measured) = 0.498 W/kg

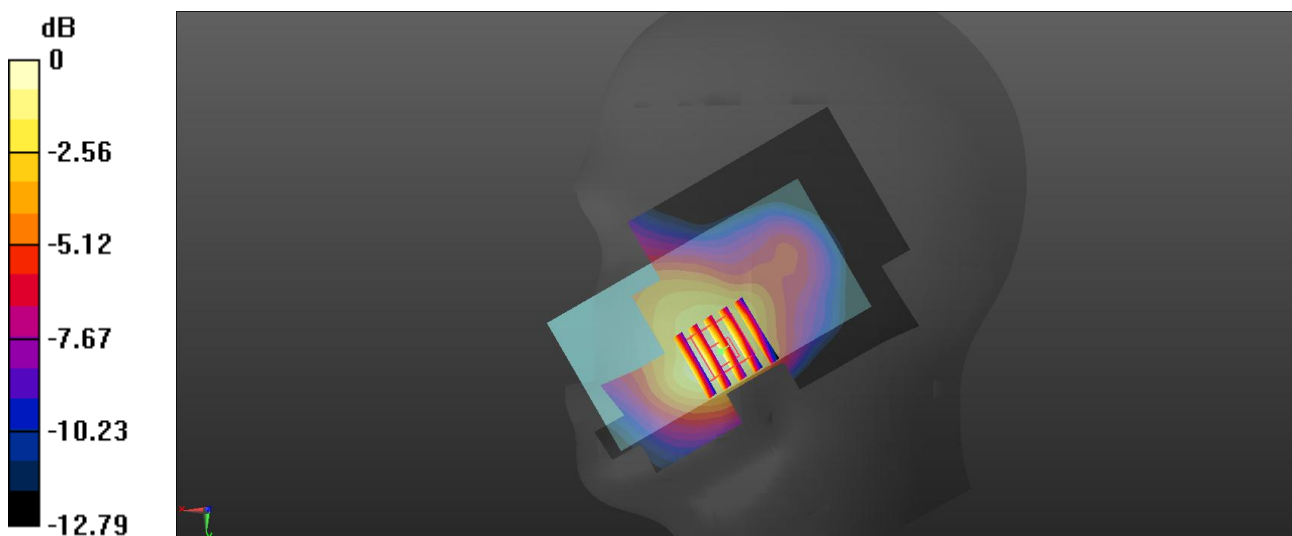

0 dB = 0.516 W/kg

Meas8.Body-worn&Hotspot Back side 10mm WCDMA B4 Ch1312

Date: 2025/9/28

Communication System Band: Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 39.349$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.87, 8.87, 8.87); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1312/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.13 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.585 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 1.27 W/kg

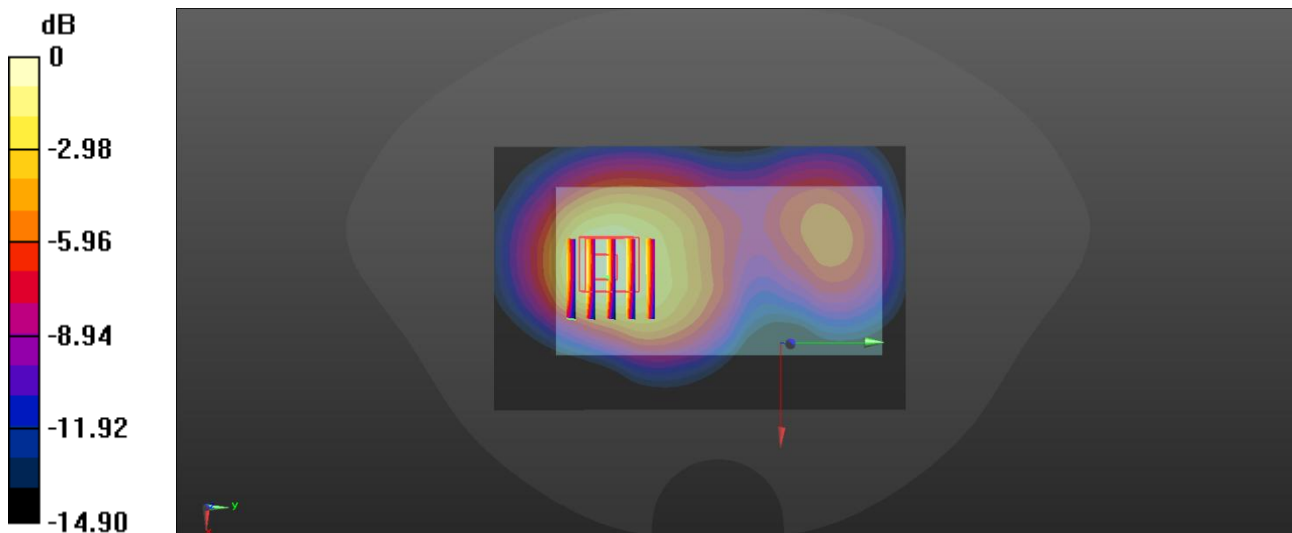

0 dB = 1.27 W/kg

Meas9.Head Left Cheek LTE B2 Ch18900

Date: 2025/9/29

Communication System Band: Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.788 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.648 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.797 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 69.8%

Maximum value of SAR (measured) = 0.728 W/kg

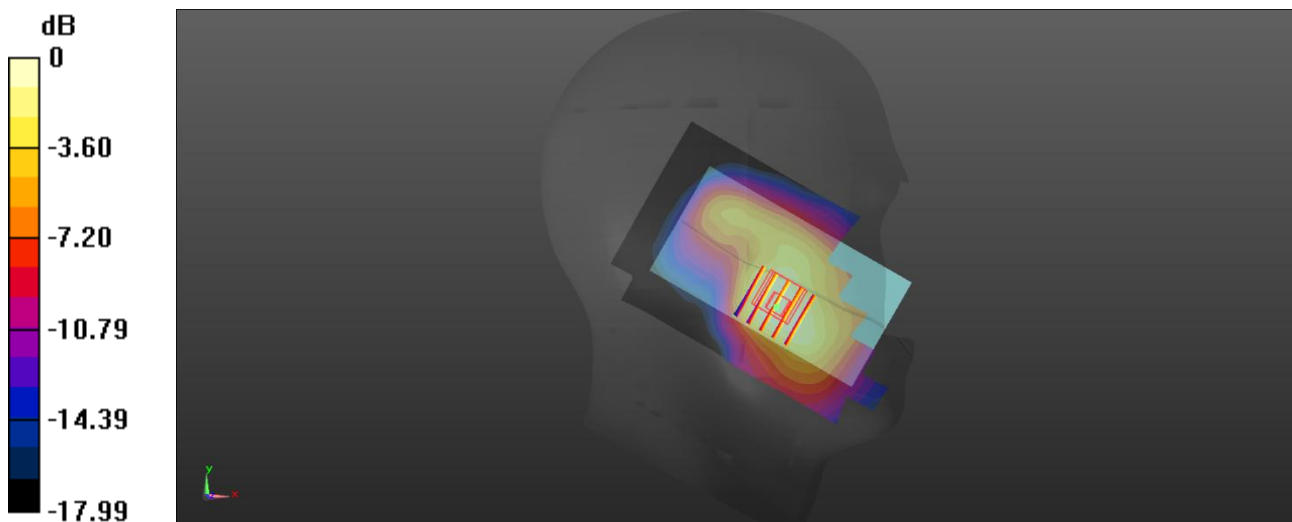

0 dB = 0.728 W/kg

Meas10.Body-worn&Hotspot Back side 10mm LTE B2 Ch18900

Date: 2025/9/29

Communication System Band: Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.296 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.800 W/kg

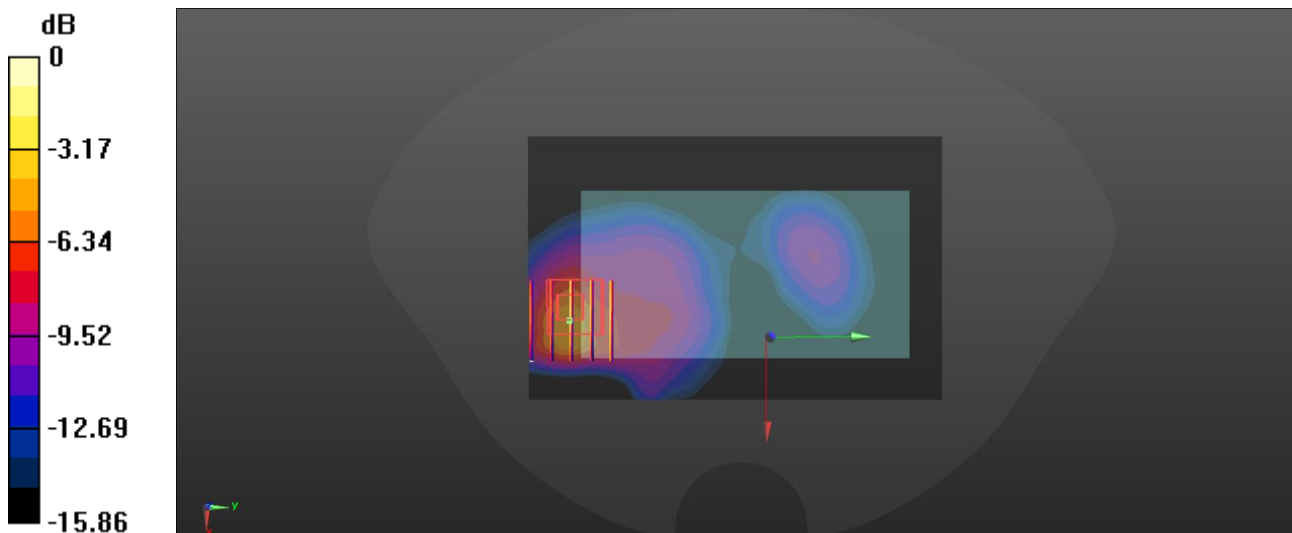

0 dB = 0.800 W/kg

Meas11.Head Left Cheek LTE B5 Ch20525

Date: 2025/9/27

Communication System Band: Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.322$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20525/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.706 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.308 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.807 W/kg

SAR(1 g) = 0.540 W/kg; SAR(10 g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 18.8 mm

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 0.677 W/kg

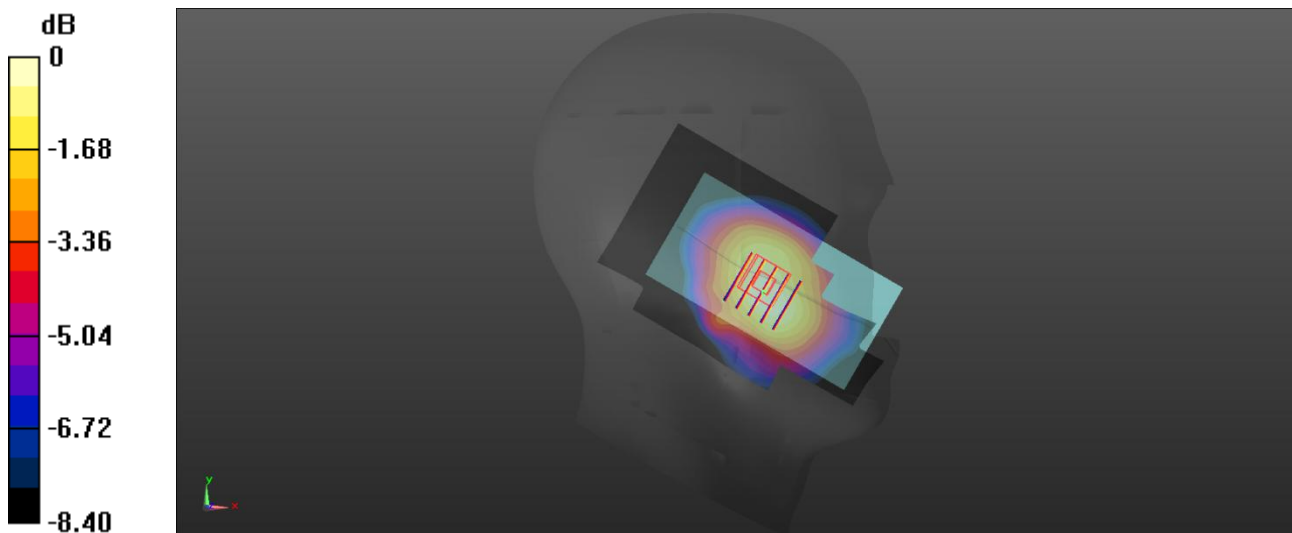

0 dB = 0.677 W/kg

Meas12.Body-worn&Hotspot Back side 10mm LTE B5 Ch20525

Date: 2025/9/27

Communication System Band: Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.322$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20525/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.822 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.30 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.879 W/kg

SAR(1 g) = 0.651 W/kg; SAR(10 g) = 0.503 W/kg

Smallest distance from peaks to all points 3 dB below = 19.5mm

Ratio of SAR at M2 to SAR at M1 = 73.3%

Maximum value of SAR (measured) = 0.788 W/kg

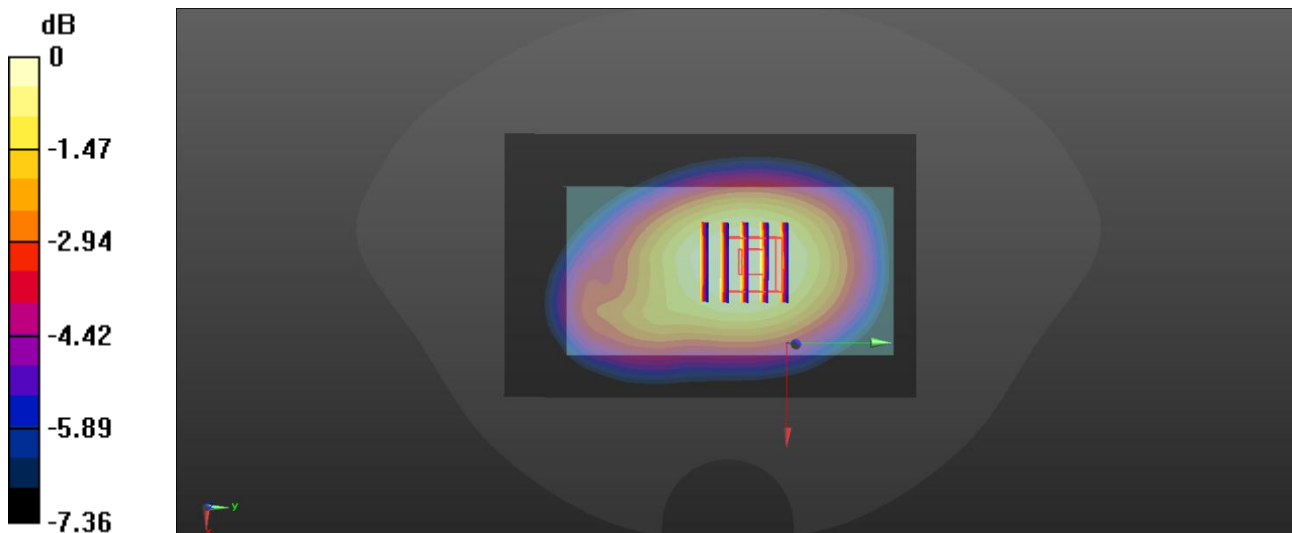

0 dB = 0.788 W/kg

Meas13.Head Left Cheek LTE B7 Ch21100

Date: 2025/10/4

Communication System Band: Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 38.218$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.83, 7.83, 7.83); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21100/Area Scan (81x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0609 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 0.0592 W/kg

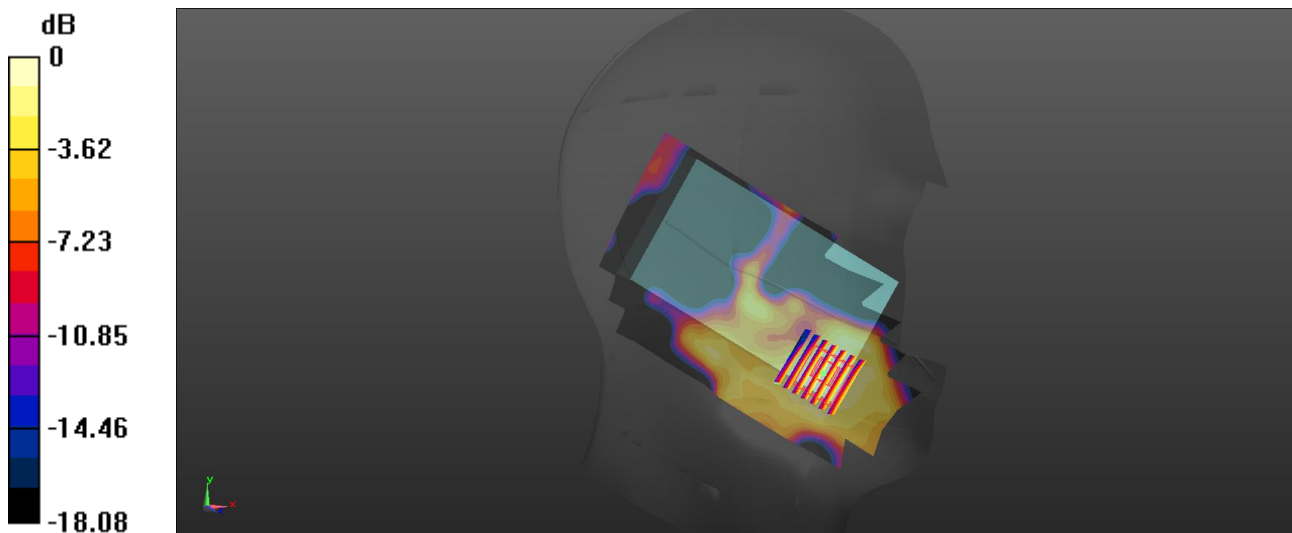

0 dB = 0.0592 W/kg

Meas14.Body-worn&Hotspot Back side 10mm LTE B7 Ch21100

Date: 2025/10/4

Communication System Band: Band 7; Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 38.218$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.83, 7.83, 7.83); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21100/Area Scan (91x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.06 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.875 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.814 W/kg; SAR(10 g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 1.27 W/kg

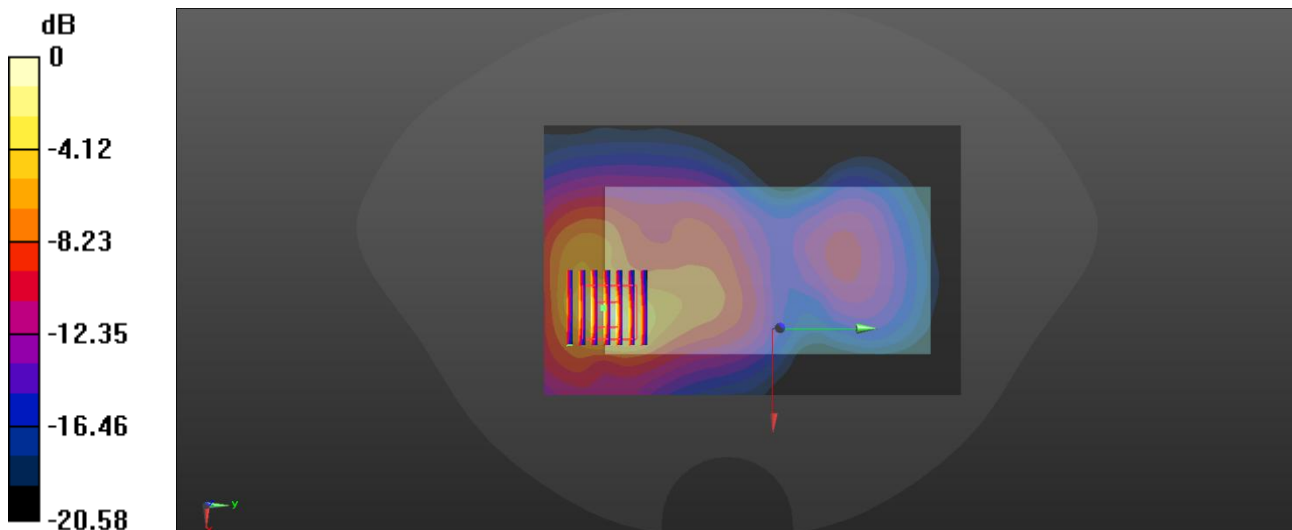

0 dB = 1.27 W/kg

Meas15.Head Left Cheek LTE B12 Ch23095

Date: 2025/9/26

Communication System Band: Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.916$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.357 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.639 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.251 W/kg

Smallest distance from peaks to all points 3 dB below = 19.6 mm

Ratio of SAR at M2 to SAR at M1 = 77.2%

Maximum value of SAR (measured) = 0.367 W/kg

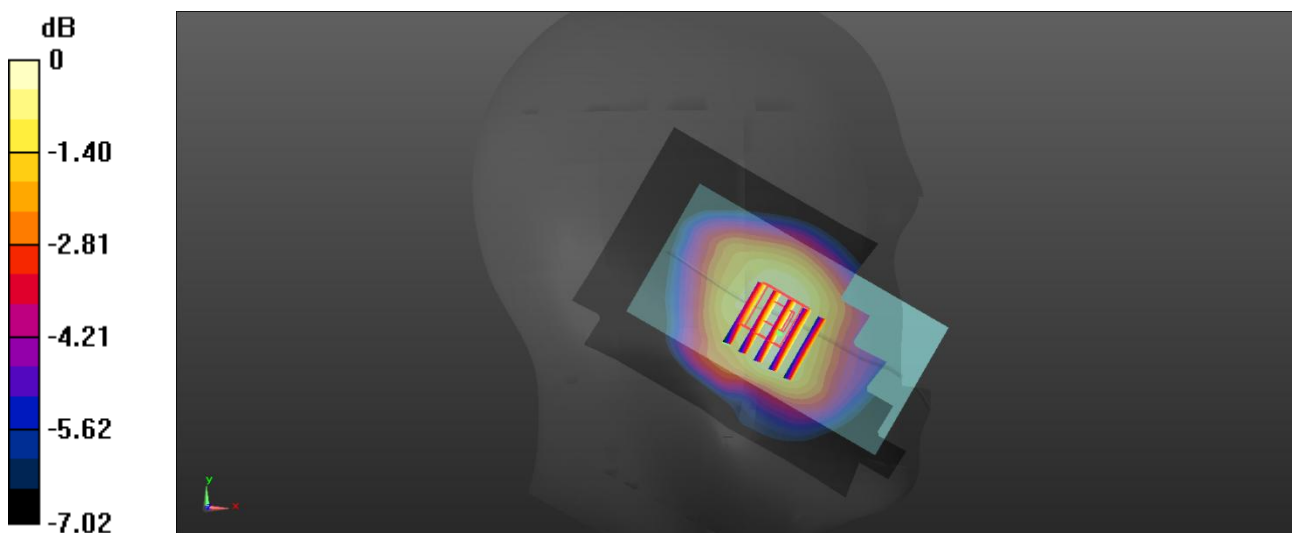

0 dB = 0.367 W/kg

Meas16.Body-worn&Hotspot Back side 10mm LTE B12 Ch23095

Date: 2025/9/26

Communication System Band: Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.916$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.705 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.01 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.426 W/kg

Smallest distance from peaks to all points 3 dB below = 18.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 0.681 W/kg

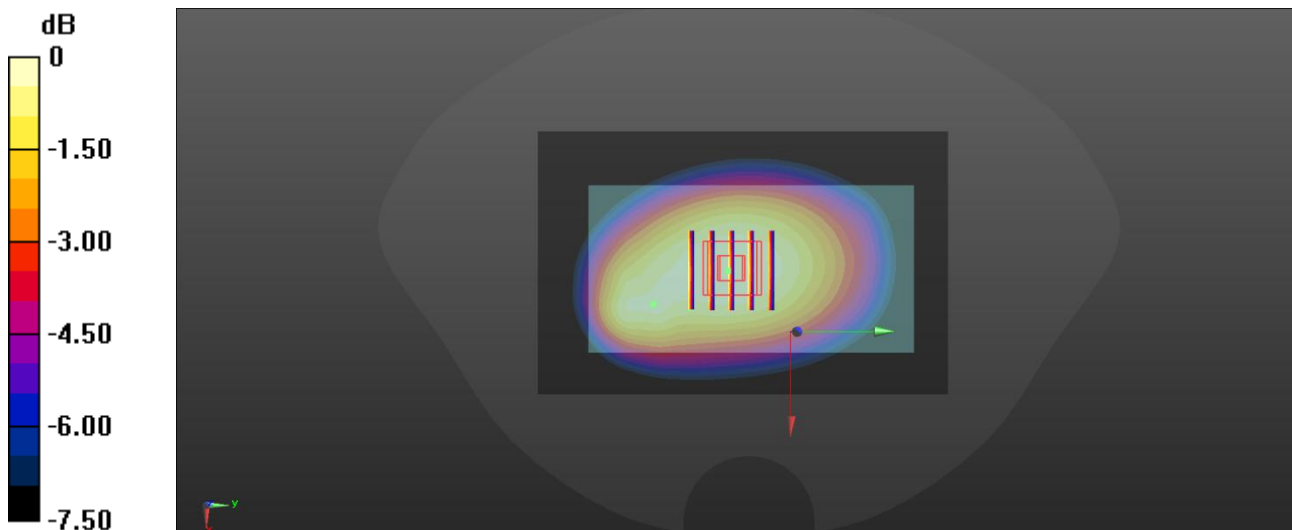

0 dB = 0.681 W/kg

Meas17.Head Left Cheek LTE B13 Ch23230

Date: 2025/9/26

Communication System Band: Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.876 \text{ S/m}$; $\epsilon_r = 42.528$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.410 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.627 V/m ; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.352 W/kg ; SAR(10 g) = 0.270 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.1%

Maximum value of SAR (measured) = 0.428 W/kg

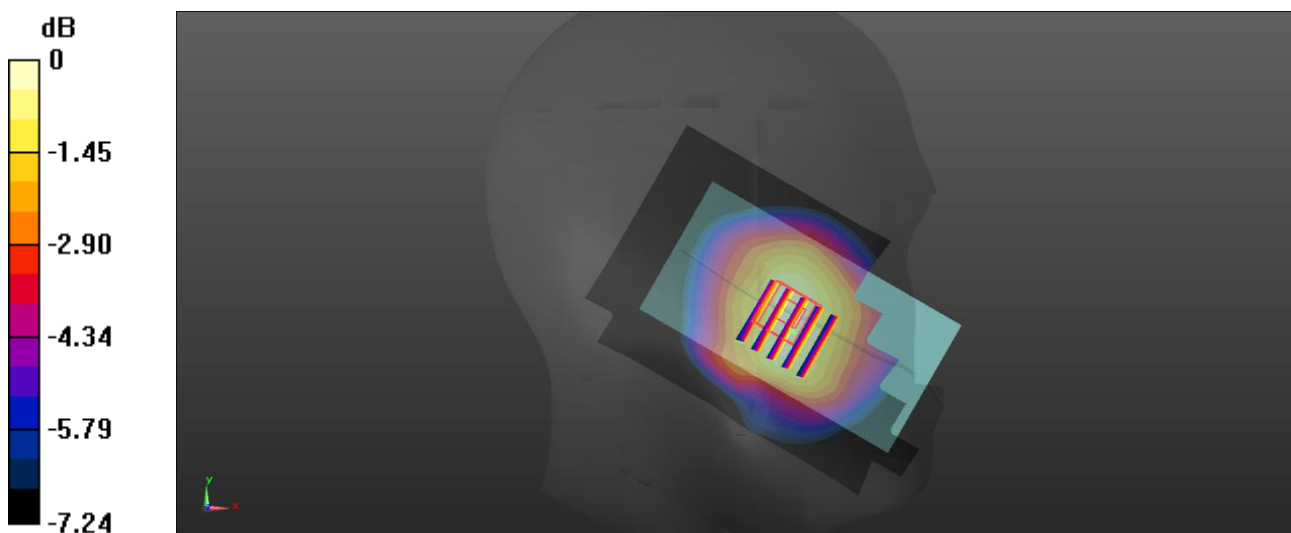

0 dB = 0.428 W/kg

Meas18.Body-worn&Hotspot Back side 10mm LTE B13 Ch23230

Date: 2025/9/26

Communication System Band: Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.876 \text{ S/m}$; $\epsilon_r = 42.528$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.671 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.78 V/m ; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.545 W/kg ; SAR(10 g) = 0.419 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.3%

Maximum value of SAR (measured) = 0.659 W/kg

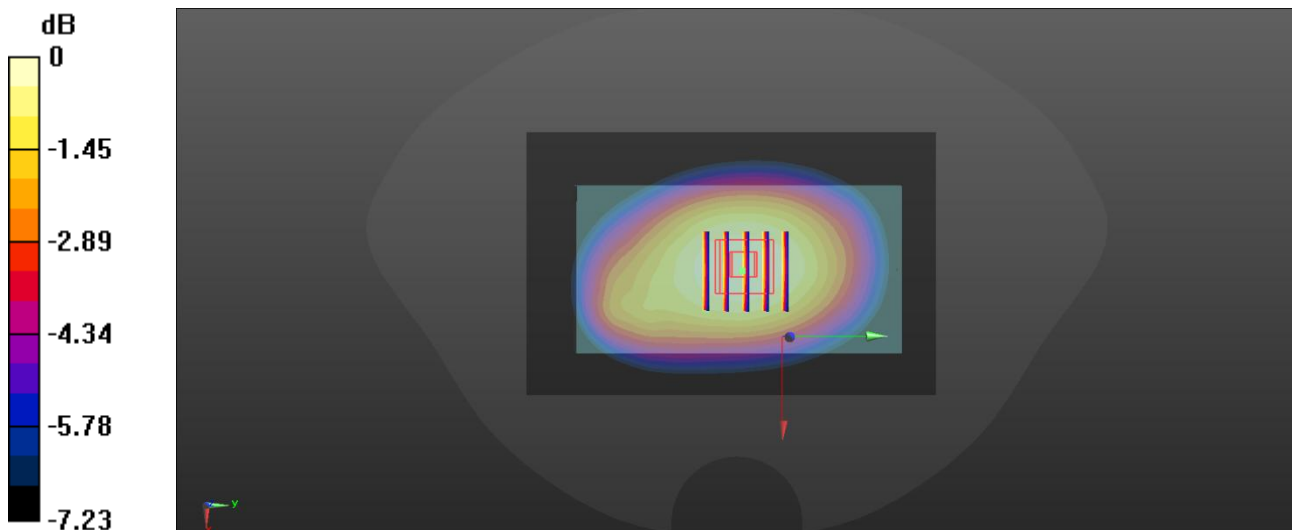

0 dB = 0.659 W/kg

Meas19.Head Left Cheek LTE B66 Ch132322

Date: 2025/9/28

Communication System Band: Band 66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 39.225$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.87, 8.87, 8.87); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.558 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.527 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.289 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 72.6%

Maximum value of SAR (measured) = 0.529 W/kg

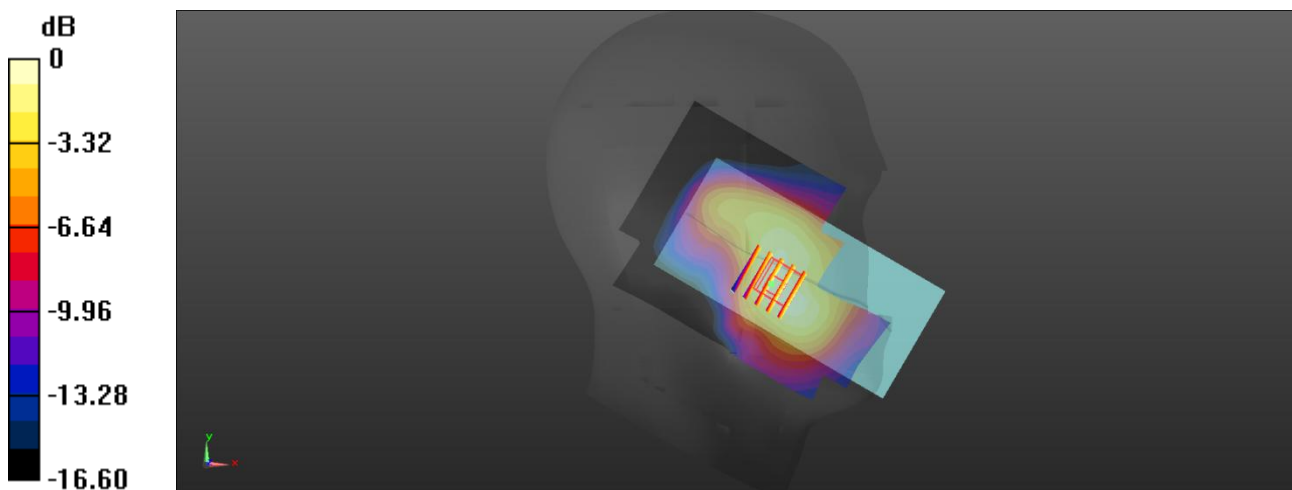

0 dB = 0.529 W/kg

Meas20.Body-worn&Hotspot Back side 10mm LTE B66 Ch132572

Date: 2025/9/28

Communication System Band: Band 66; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.177$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.87, 8.87, 8.87); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132572/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.25 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.019 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.534 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 1.22 W/kg

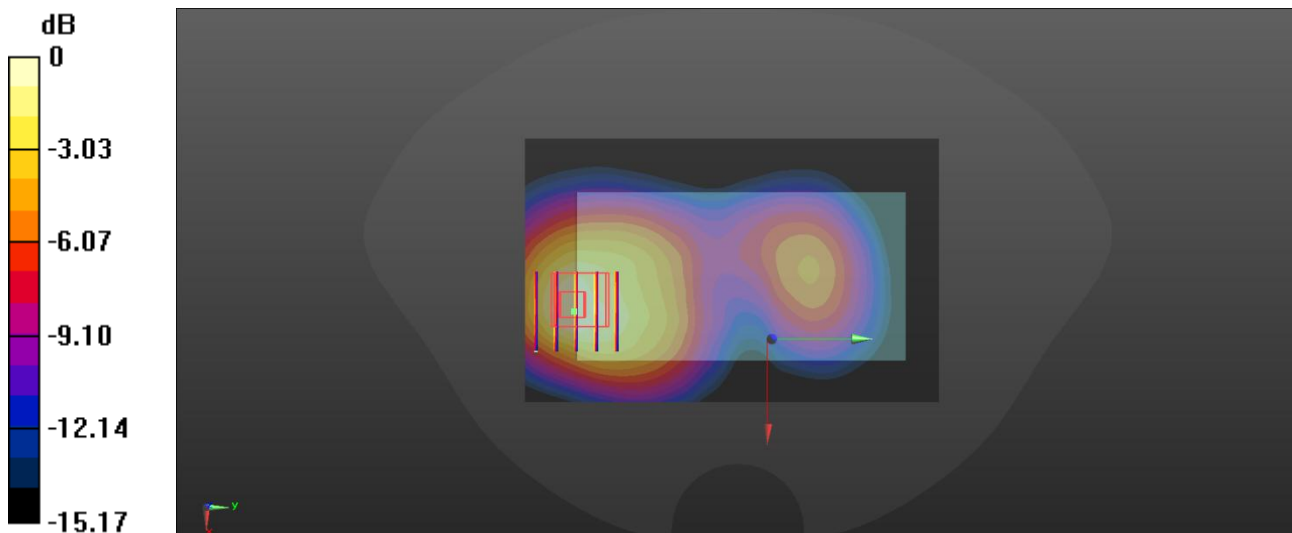

0 dB = 1.22 W/kg

Meas21.Head Left Cheek LTE B71 Ch133322

Date: 2025/9/26

Communication System Band: Band 71; Frequency: 683 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 683$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 43.061$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch133322/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.476 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.714 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.319 W/kg

Smallest distance from peaks to all points 3 dB below = 17.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.3%

Maximum value of SAR (measured) = 0.477 W/kg

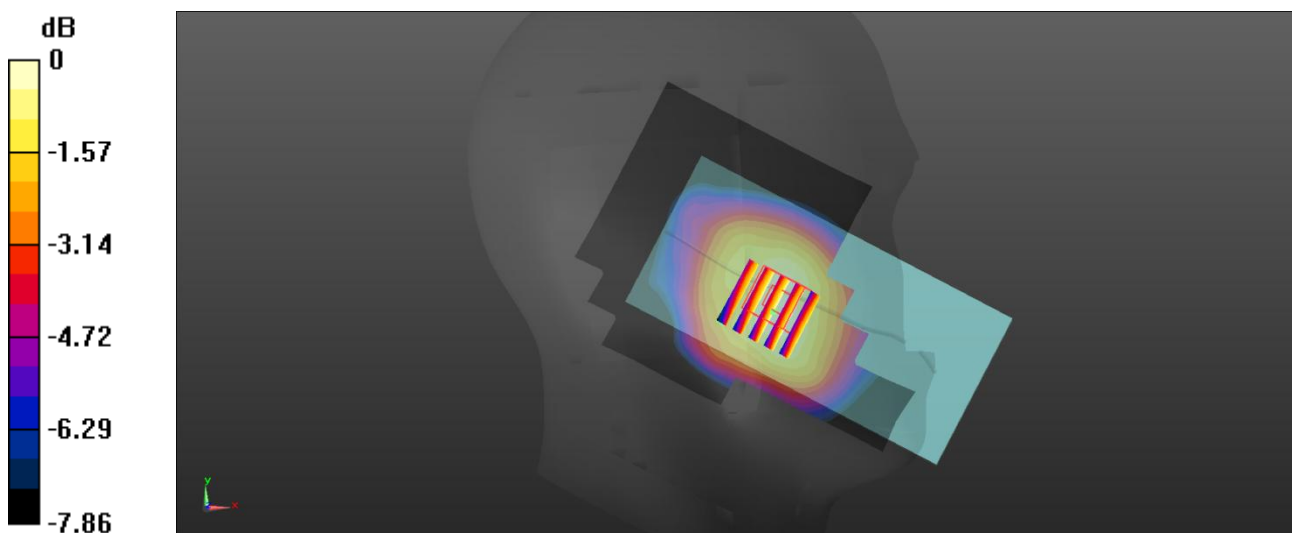

0 dB = 0.477 W/kg

Meas22.Body-worn&Hotspot Back side 10mm LTE B71 Ch133322

Date: 2025/9/26

Communication System Band: Band 71; Frequency: 683 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 683$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 43.061$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch133322/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.884 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.70 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.427 W/kg

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.869 W/kg

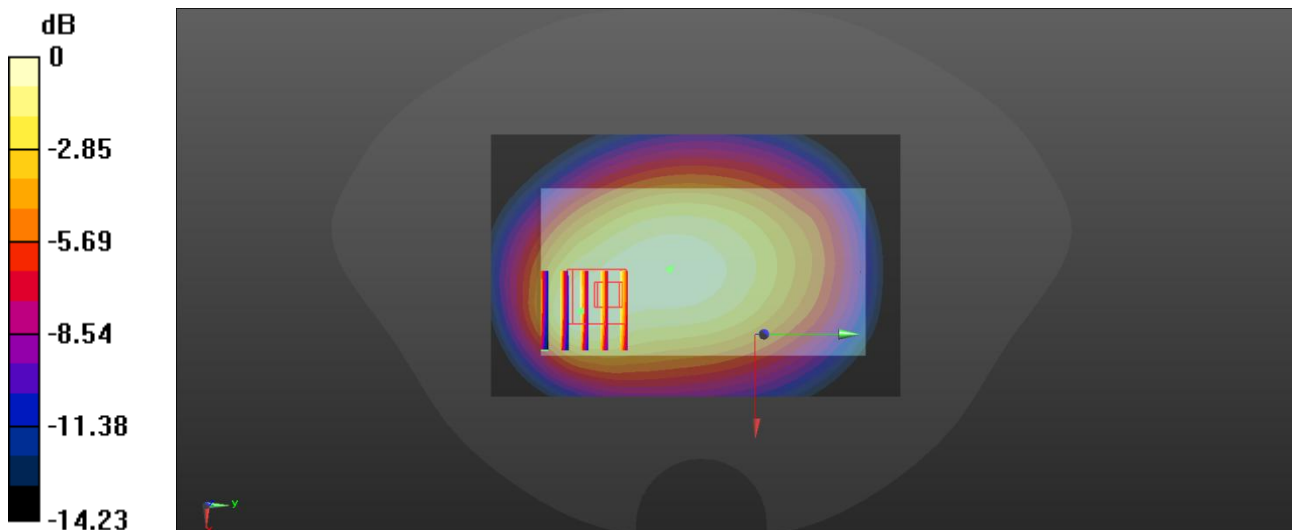

0 dB = 0.869 W/kg

Meas23.Head Left Cheek Bluetooth Ch78

Date: 2025/9/30

Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.301

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.847$ S/m; $\epsilon_r = 38.301$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8, 8, 8); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0591 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.862 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.020 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.0601 W/kg

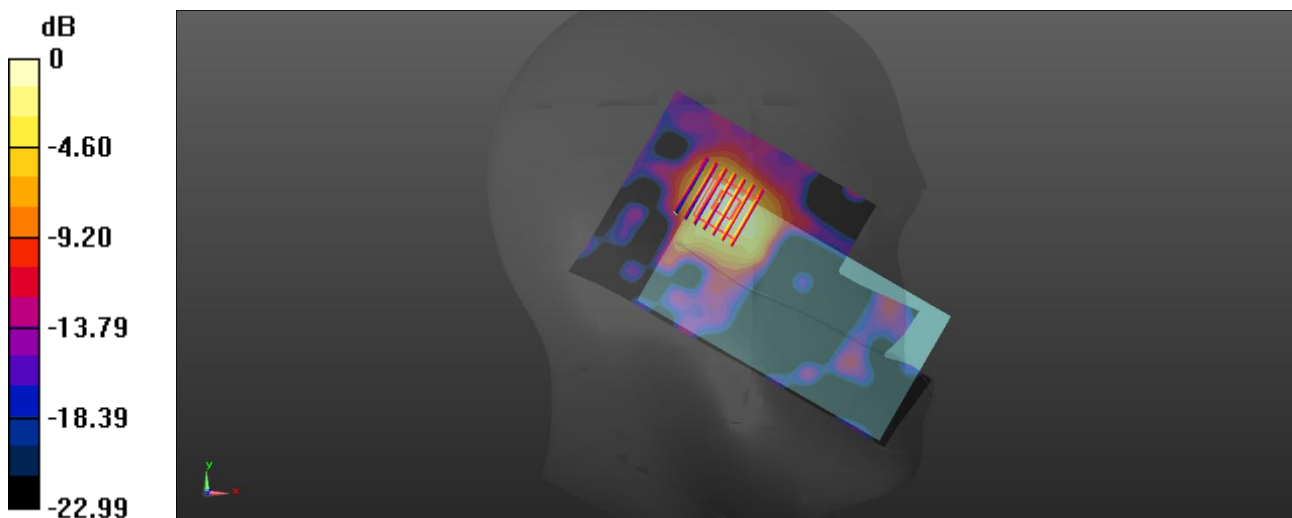

0 dB = 0.0601 W/kg

Meas24. Body-worn&Hotspot Right side 10mm Bluetooth Ch78

Date: 2025/9/30

Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.301

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.847$ S/m; $\epsilon_r = 38.301$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8, 8, 8); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.118 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.939 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 34.3%

Maximum value of SAR (measured) = 0.166 W/kg

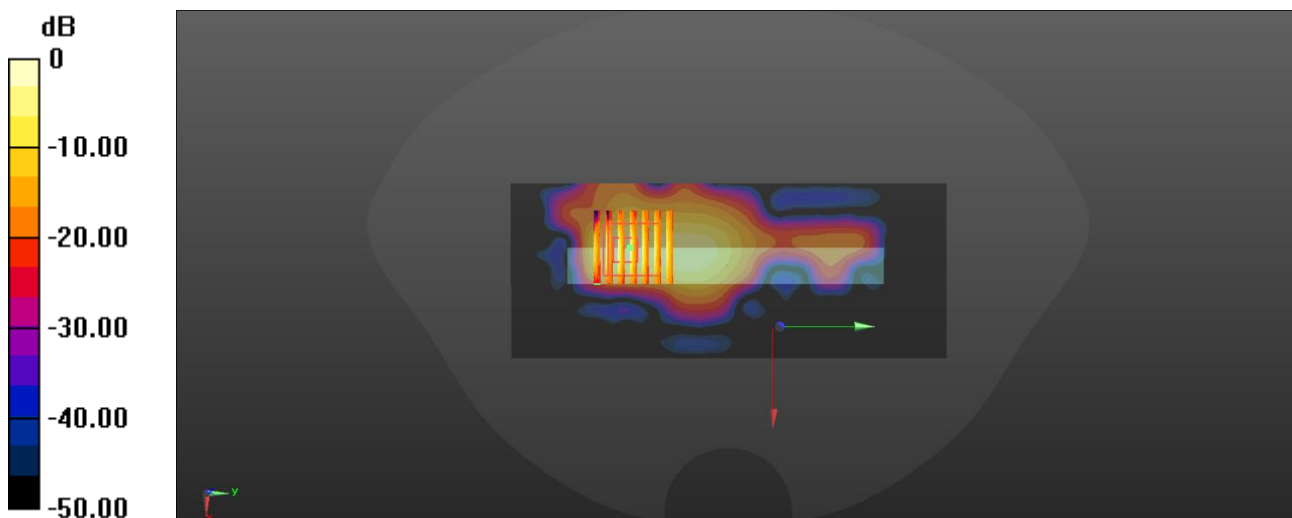

0 dB = 0.166 W/kg

Meas25.Head Left Cheek WLAN 2.4G Ch1

Date: 2025/9/30

Communication System Band: WLAN 2.4GHz; Frequency: 2412 MHz; Duty Cycle: 1:1.008

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.416$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8, 8, 8); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1/Area Scan (81x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.488 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.469 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.438 W/kg

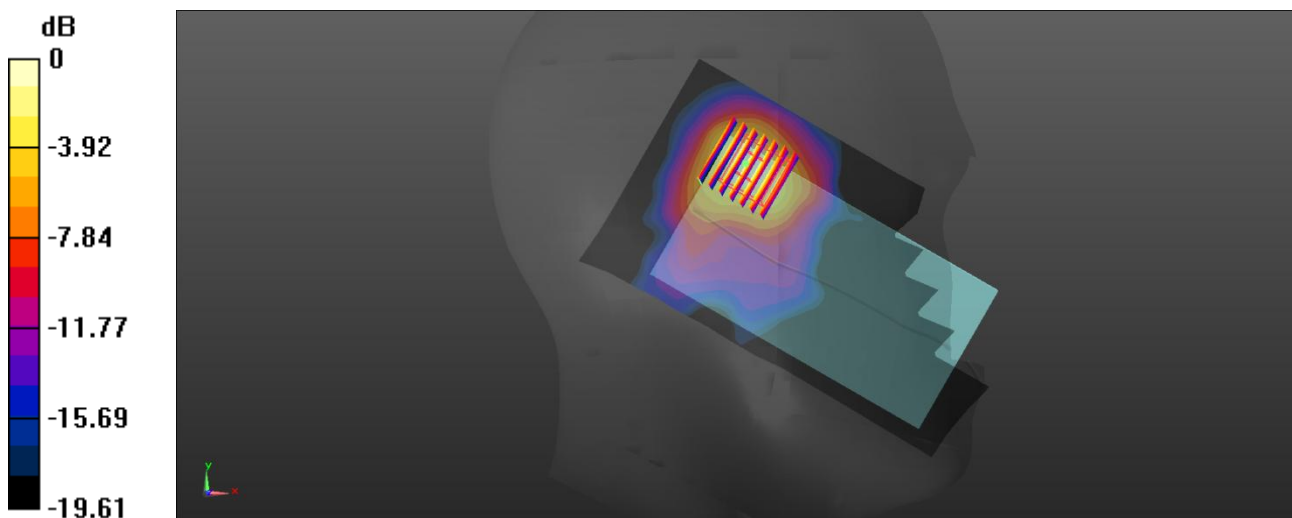

0 dB = 0.438W/kg

Meas26. Body-worn&Hotspot Right side 10mm WLAN 2.4G Ch1

Date: 2025/9/30

Communication System Band: WLAN 2.4GHz; Frequency: 2412 MHz; Duty Cycle: 1:1.008

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.416$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8, 8, 8); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1/Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.141 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.929 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.5%

Maximum value of SAR (measured) = 0.131 W/kg

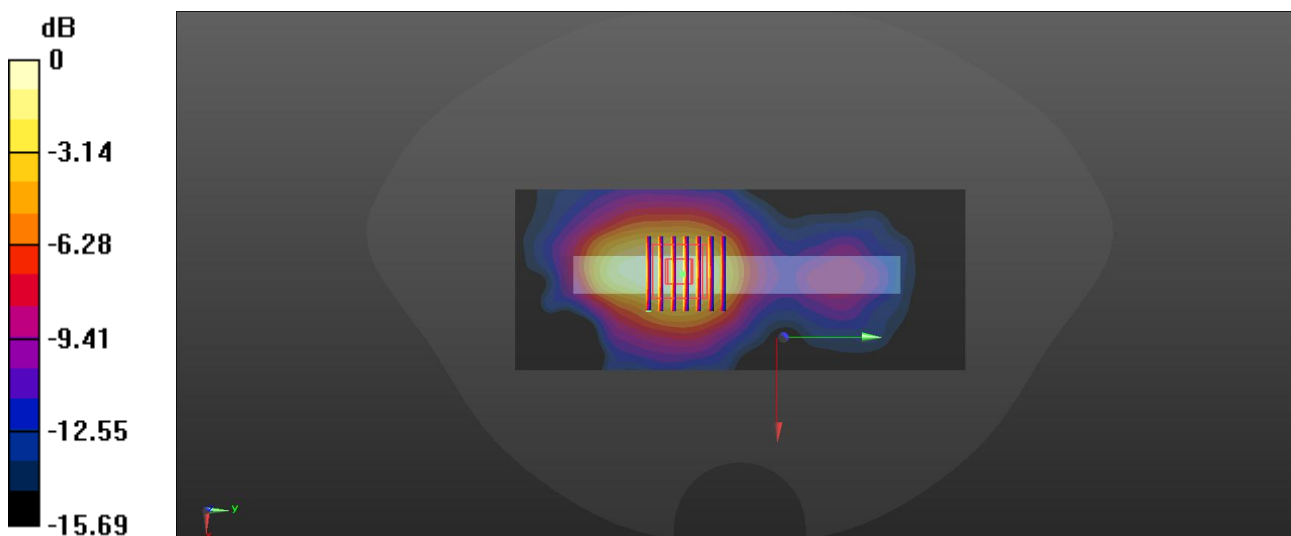

0 dB = 0.131 W/kg

Meas27.Head Left Cheek WLAN 5.3G Ch52

Date: 2025/10/5

Communication System Band: Band 2; Frequency: 5260 MHz; Duty Cycle: 1:1.035

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.604$ S/m; $\epsilon_r = 35.164$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch52/Area Scan (91x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.799 W/kg

Ch52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7390 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.754 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.043 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 0.455 W/kg

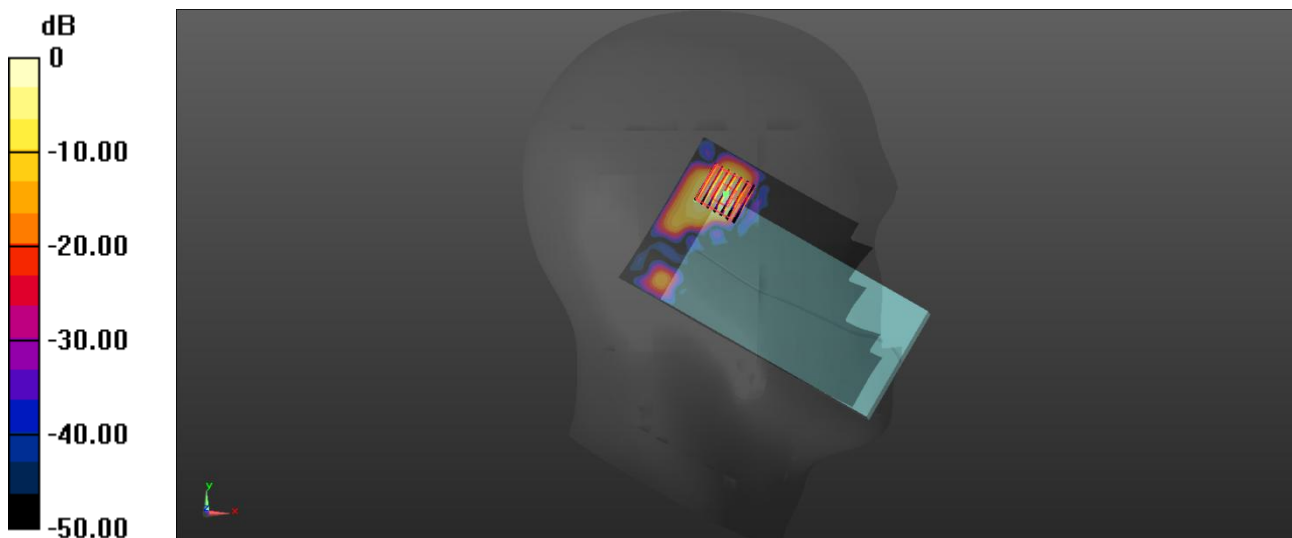

0 dB = 0.455 W/kg

Meas28.Head Left Cheek WLAN 5.6G Ch116

Date: 2025/10/6

Communication System Band: Band 3; Frequency: 5580 MHz; Duty Cycle: 1:1.035

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.938$ S/m; $\epsilon_r = 34.502$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.05, 5.05, 5.05); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch116/Area Scan (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.370 W/kg

Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.040 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 0.471 W/kg

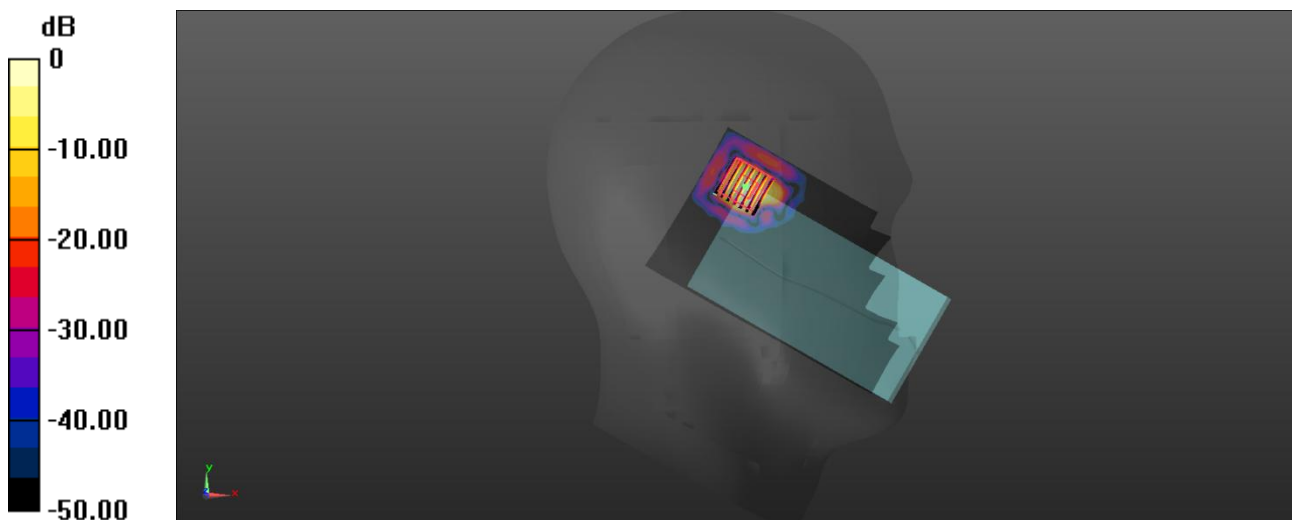

0 dB = 0.471 W/kg

Meas29.Head Left Cheek WLAN 5.8G Ch149

Date: 2025/10/8

Communication System Band: Band 4; Frequency: 5745 MHz; Duty Cycle: 1:1.035

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.106$ S/m; $\epsilon_r = 34.189$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch149/Area Scan (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.43 W/kg

Ch149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.2750 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 0.623 W/kg

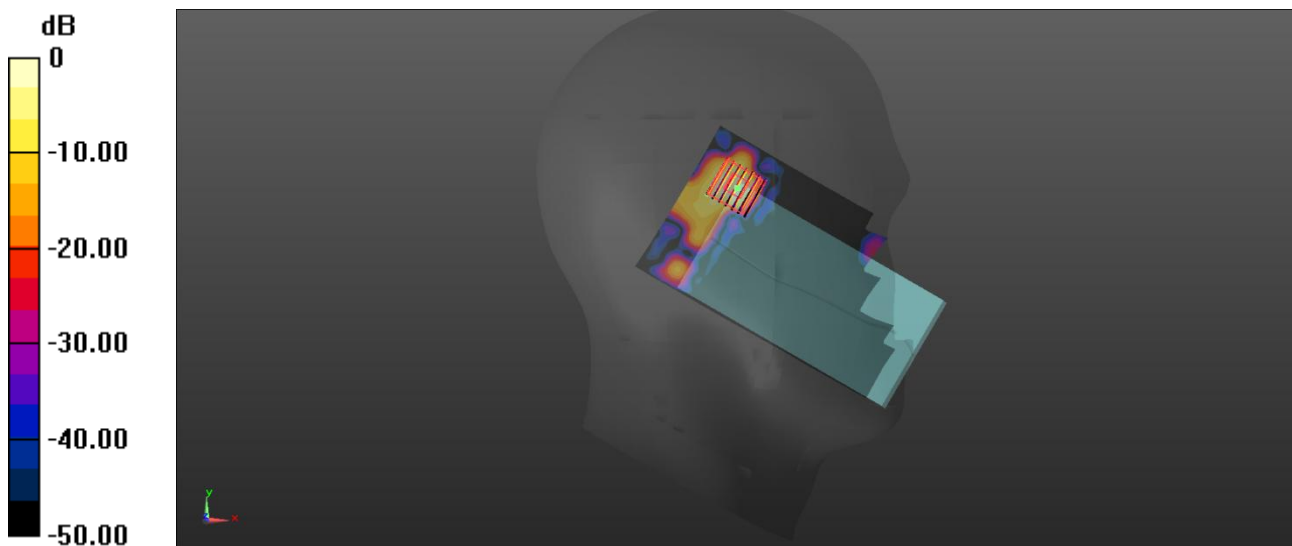

0 dB = 0.623 W/kg

Meas30. Body-worn&Hotspot Back side 10mm WLAN 5.3G Ch52

Date: 2025/10/5

Communication System Band: Band 2; Frequency: 5260 MHz; Duty Cycle: 1:1.035

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.604$ S/m; $\epsilon_r = 35.164$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch52/Area Scan (91x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.369 W/kg

Ch52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.369 W/kg

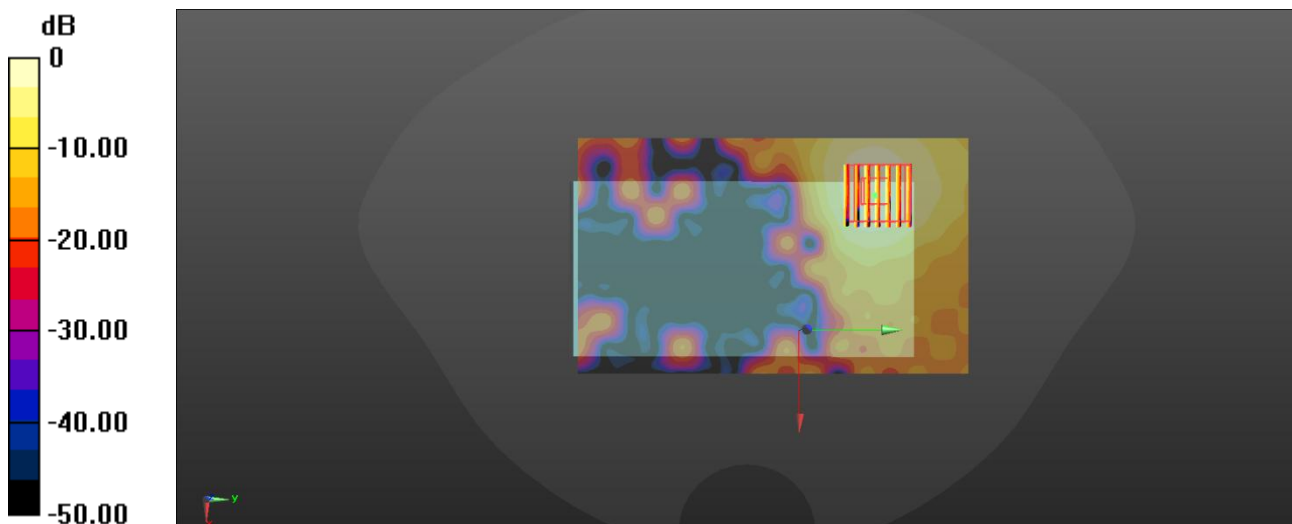

0 dB = 0.369 W/kg

Meas31. Body-worn&Hotspot Back side 10mm WLAN 5.6G Ch116

Date: 2025/10/6

Communication System Band: Band 3; Frequency: 5580 MHz; Duty Cycle: 1:1.035

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.938$ S/m; $\epsilon_r = 34.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.05, 5.05, 5.05); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch116/Area Scan (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.169 W/kg

Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.028 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.162 W/kg

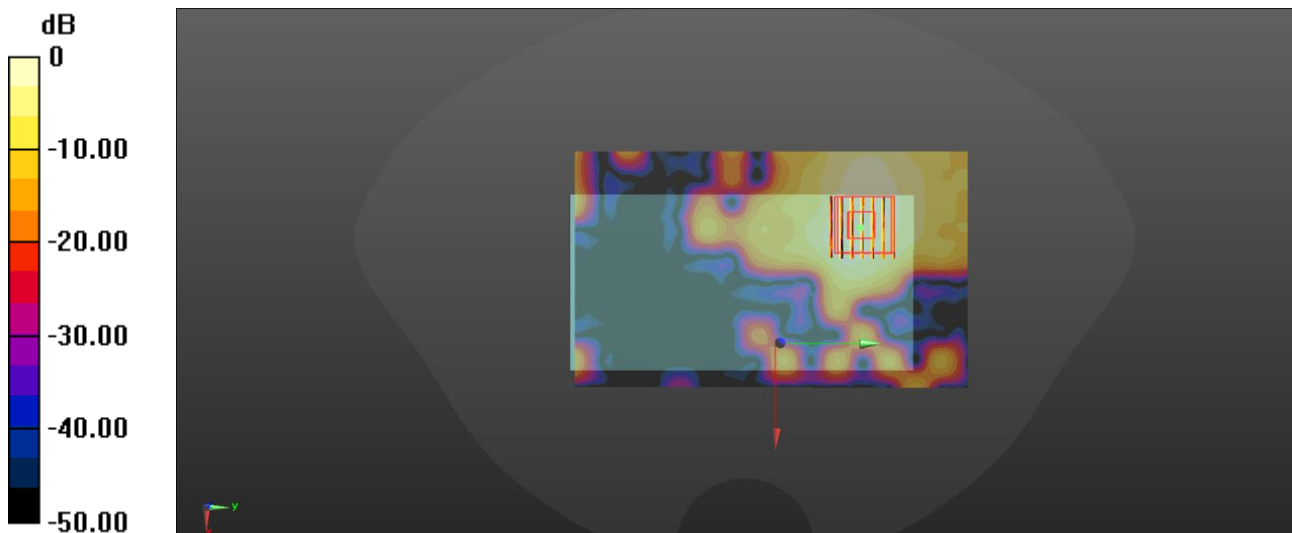

0 dB = 0.162 W/kg

Meas32. Body-worn&Hotspot Back side 10mm WLAN 5.8G Ch149

Date: 2025/10/8

Communication System Band: Band 4; Frequency: 5745 MHz; Duty Cycle: 1:1.035

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.106$ S/m; $\epsilon_r = 34.189$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch149/Area Scan (91x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.187 W/kg

Ch149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.06dB


Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below = 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 0.160 W/kg

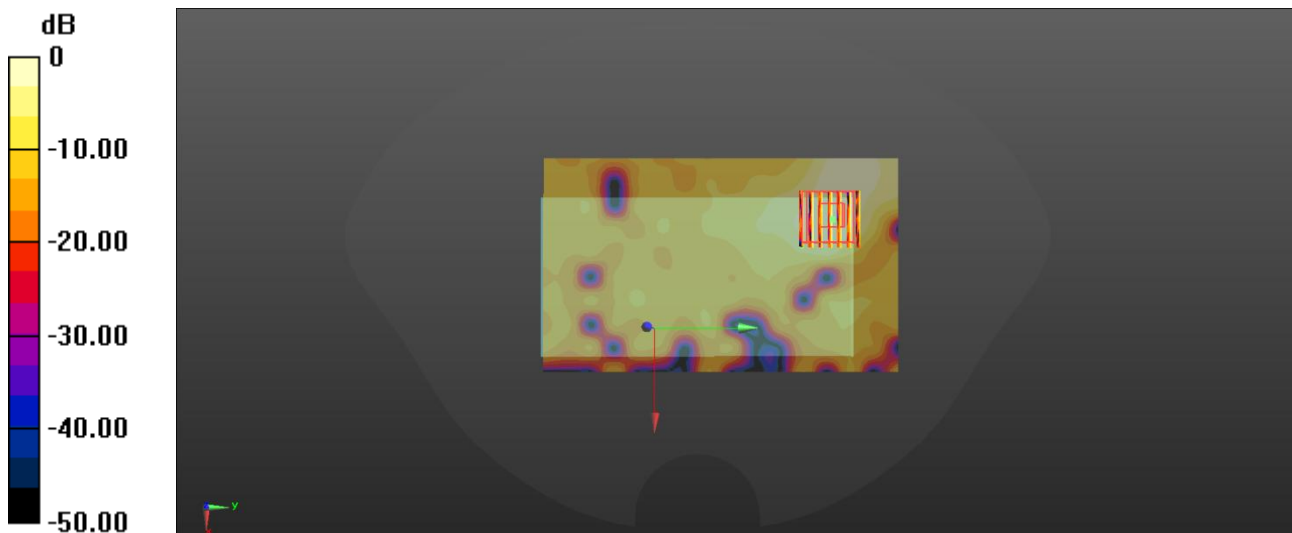

0 dB = 0.160 W/kg

Meas33. Hotspot Back side 10mm WLAN 5.2G Ch44

Date: 2025/10/5

Communication System Band: Band 1; Frequency: 5220 MHz; Duty Cycle: 1:1.035

Medium parameters used: $f = 5220$ MHz; $\sigma = 4.583$ S/m; $\epsilon_r = 35.203$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.76, 5.76, 5.76); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch44/Area Scan (91x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.385 W/kg

Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.522 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

Maximum value of SAR (measured) = 0.356 W/kg

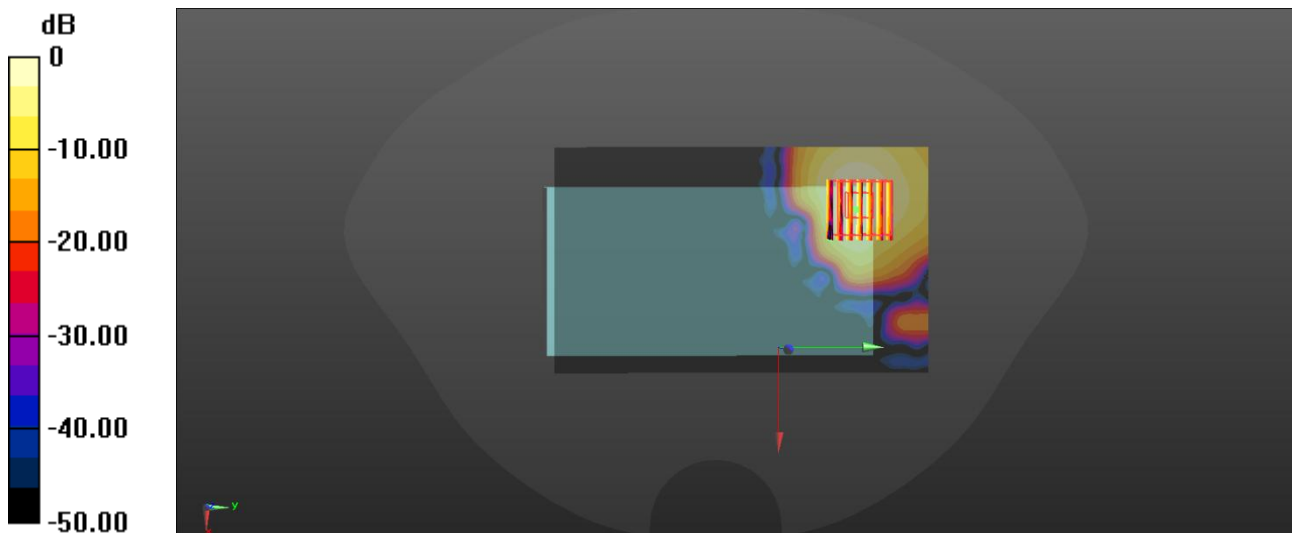

0 dB = 0.356 W/kg

Meas34. Body-worn&Hotspot Right side 10mm WLAN 5.8G Ch149

Date: 2025/10/8

Communication System Band: Band 4; Frequency: 5745 MHz; Duty Cycle: 1:1.035

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.106$ S/m; $\epsilon_r = 34.189$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch149/Area Scan (71x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.557 W/kg

Ch149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.061 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.889 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 0.556 W/kg

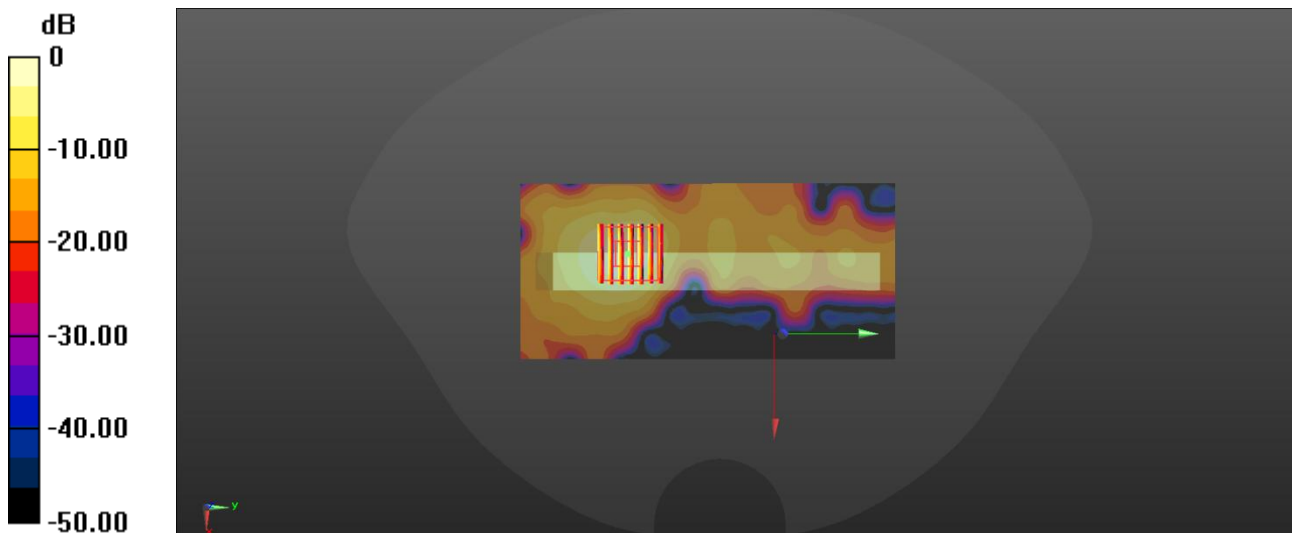

0 dB = 0.556 W/kg

Meas35.Extremity Right side 0mm WLAN 5.3G Ch52

Date: 2025/10/5

Communication System Band: Band 2; Frequency: 5260 MHz; Duty Cycle: 1:1.035

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.604$ S/m; $\epsilon_r = 35.164$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch52/Area Scan (71x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 3.53 W/kg

Ch52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 7.44 W/kg

SAR(1 g) = 1.52 W/kg; SAR(10 g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 4.24 W/kg

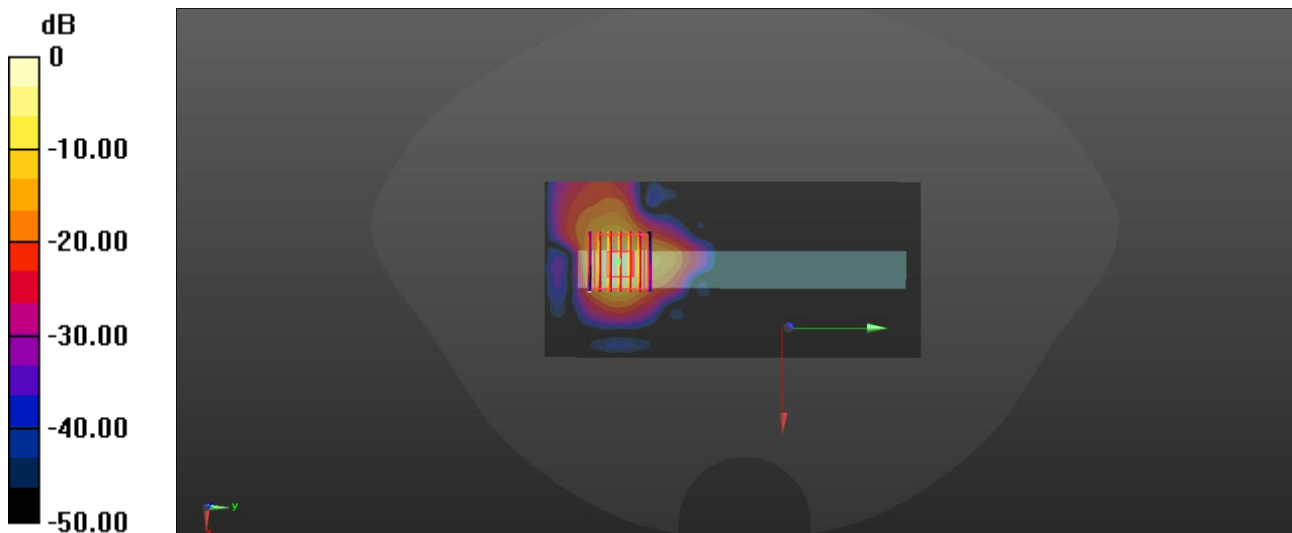

0 dB = 4.24 W/kg

Meas36.Extremity Right side 0mm WLAN 5.6G Ch116

Date: 2025/10/6

Communication System Band: Band 3; Frequency: 5580 MHz; Duty Cycle: 1:1.035

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.861$ S/m; $\epsilon_r = 34.686$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.16, 5.16, 5.16); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch116/Area Scan (71x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 5.67 W/kg

Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 9.94 W/kg

SAR(1 g) = 1.69 W/kg; SAR(10 g) = 0.310 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 5.04 W/kg

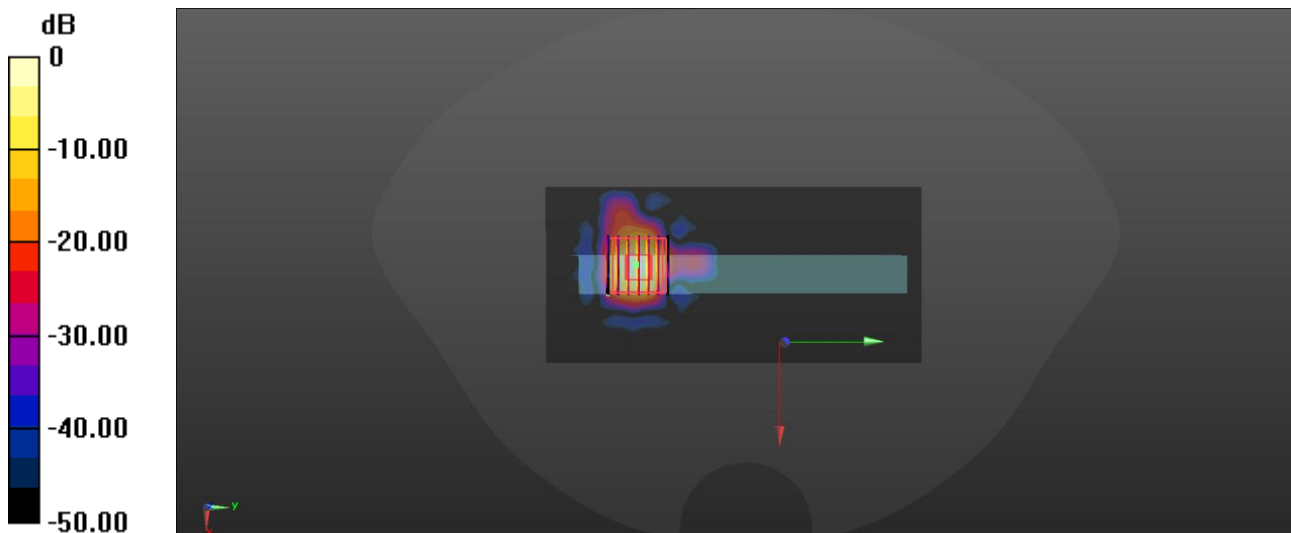

0 dB = 5.04 W/kg