

TEST REPORT

Applicant Name: SHENZHEN HUAPTEC CO., LTD
Address: 3rd FL,E BLDG, Sogood Science Park, SanWei community,
Hangcheng Street, Bao'an District, Shenzhen, China
Report Number: 2604T01718E-RF-00A
FCC ID: OWWC015235SR

Test Standard (s)

FCC PART 20.21

Sample Description

Product Name: Signal Booster
Model No.: C30G-5S-BTW, C30G-5S-BTW.RV, C30G-5S-BTW.RM,
C30G-5S-BTW.TRUCK, C30G-5S-BTW.EX
Trade Mark: HiBoost
Received Date: 2026-05-26
Report Date: 2026-07-25

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:

Benny Li

Benny Li
Engineer

Approved By:

Bob. Liao

Bob.Liao
Supervisor

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Bay Area Compliance Laboratories Corp. (Shenzhen, Guangming)

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	6
TEST METHODOLOGY	6
TEST FACILITY	6
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION.....	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES AND EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
7.1 AUTHORIZED FREQUENCY BAND VERIFICATION	13
APPLICABLE STANDARD.....	13
TEST PROCEDURE	13
TEST DATA	13
7.2 MAXIMUM POWER MEASUREMENT	14
APPLICABLE STANDARD.....	14
TEST PROCEDURE	14
TEST DATA	15
7.3 MAXIMUM BOOSTER GAIN COMPUTATION	16
APPLICABLE STANDARDS.....	16
TEST PROCEDURE	16
TEST DATA	16
7.4 INTERMODULATION PRODUCT.....	17
APPLICABLE STANDARDS.....	17
TEST PROCEDURE	17
TEST DATA	17
7.5 OUT OF BAND EMISSIONS.....	18
APPLICABLE STANDARDS.....	18
TEST PROCEDURE	18
TEST DATA	19
7.7 NOISE LIMITS.....	20
APPLICABLE STANDARDS.....	20
TEST PROCEDURE	20
TEST DATA	21
7.8 UPLINK INACTIVITY	22
APPLICABLE STANDARDS.....	22
TEST PROCEDURE	22
TEST DATA	22

7.9 VARIABLE BOOSTER GAIN	23
APPLICABLE STANDARDS.....	23
TEST PROCEDURE	23
TEST DATA	24
7.10 OCCUPIED BANDWIDTH	25
APPLICABLE STANDARDS.....	25
TEST PROCEDURE	25
TEST DATA	25
7.11 OSCILLATION DETECTION	26
APPLICABLE STANDARDS.....	26
TEST PROCEDURE	26
TEST DATA	26
7.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	27
APPLICABLE STANDARDS.....	27
TEST PROCEDURE	27
TEST DATA	28
7.12 RADIATED SPURIOUS EMISSIONS	29
APPLICABLE STANDARDS.....	29
TEST PROCEDURE	29
TEST DATA	29
EXHIBIT A-EUT PHOTOGRAPHS	30
EXHIBIT B-TEST SETUP PHOTOGRAPHS	31

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2604T01718E-RF-00A	Original Report	2026-07-25

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	Signal Booster
Tested Model	C30G-5S-BTW
Multiple Model	C30G-5S-BTW.RV, C30G-5S-BTW.RM, C30G-5S-BTW.TRUCK, C30G-5S-BTW.EX
Voltage Range [#]	DC 12V from adapter or DC 9-36V Car charger
Adapter Information [#]	Model: GM39-120300-1A Input: 100-240V~ 50/60Hz 1.5A Output: 12.0V ---3.0A
Car Charger Information [#]	Input: DC 9-36V Output: DC 5.0V ---3.5A(USB Port) DC 9-36V/3A(DC cable)
Sample Serial Number	3MLO-1 (Assigned by BACL, Shenzhen, Guangming)
Sample/EUT Status	Good condition

Note 1: Model Difference[#]: About all models, the amplifiers are the same, but the model names, antennas and accessories are different. For example:

- C30G-5S-BTW: Car Charger + Magnetic Antenna + Panel Antenna
- C30G-5S-BTW.RV / C30G-5S-BTW.RM:
Adapter + Car Charger + Outside Omni-Directional Antenna + 26ft Cable + Magnetic Antenna
- C30G-5S-BTW.TRUCK / C30G-5S-BTW.EX:
Car Charger + Outside Omni-Directional Antenna + 15ft Cable + Panel Antenna

Please refer to DOS letter for details.

Note 2[#]: The NMO antenna is an alternative option and may be used for other models.

Note: This device is a mobile wideband consumer and the Booster Operating frequency bands list below:

Electrical specification	Uplink	Downlink
Frequency Range	698 ~ 716 MHz	728 ~ 746 MHz
	776 ~ 787 MHz	746 ~ 757 MHz
	824 ~ 849 MHz	869 ~ 894 MHz
	1850 ~ 1915 MHz	1930 ~ 1995 MHz
	1710 ~ 1755 MHz	2110 ~ 2155 MHz

Objective

This test report is in accordance with Part 2, Part 20.21 and Part 22, Part 24, Part 27 of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Applicable Standards: KDB 935210 D03 Signal Booster Measurements v04r04.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen, Guangming) to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA).The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5 %
RF Frequency		0.064×10^{-7}
RF output power, conducted		0.3 dB
Unwanted Emission, conducted		1.2 dB
Emissions, Radiated	9kHz - 30MHz	2.1 dB
	30MHz - 1GHz	4.3 dB
	1GHz - 18GHz	4.9 dB
	18GHz - 26.5GHz	5.2 dB
	26.5GHz - 40GHz	4.6 dB
Temperature		1 °C
Humidity		2 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

The device can be powered by the adapter or car charger, and choose the adapter for test.

Antenna kitting requirement: EUT has some antennas kitting for marketing, the antenna gain and cable loss for various band were listed below, fulfill the requirement of FCC Part 20.21(e)(8)(i)(G), more detail information please refer to the user manuals.

Outside Antenna:

Frequency Range (MHz)	Omni-directional antenna(with cable) and Cables			NMO Antenna and Cables			Magnetic antenna with Cable
	Gain + Cable loss (dBi)	26ft Cable Loss (dB)	15ft Cable Loss (dB)	Gain (dBi)	6.6ft Cable Loss (dB)	13.1ft Cable Loss (dB)	Gain + Cable loss (dBi)
698-716	2	2.3	1.33	-1.5	0.58	1.16	-2
776-787	2	2.38	1.37	-1.5	0.6	1.2	-1.5
824-849	2	2.51	1.45	-1	0.64	1.26	-1
1850-1915	5	3.84	2.22	1	0.93	1.85	0
1710-1755	4	3.68	2.12	0	0.97	1.93	0

Note 1: The antenna gain and cable loss list above was provided by applicant.

Note 2: The maximum gain antenna is Omni-directional antenna with cable.

Inside Antenna:

Frequency Range (MHz)	Vehicle-mounted Magnetic antenna with cable	Panel antenna with cable
	Gain + Cable loss (dBi)	Gain + Cable loss (dBi)
728-746	-2	-2
746-757	-1.5	-1.5
869-894	-1	-1
1930-1995	0	0
2110-2155	0	0

Note: The antenna gain and cable loss list above was provided by applicant.

EUT Exercise Software

No exercise software was used.

Special Accessories and Equipment Modifications

No special accessories or modifications were used on the device under test (EUT) during the test.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Unknown	Load	Unknown	Unknown

External I/O Cable

Cable Description	Shielding Type	Length (m)	From Port	To
DC Cable	No	1.2	Adapter	EUT
Coaxial Cable	Yes	0.8	EUT	Load
Coaxial Cable	Yes	8.0	Wideband Radio Communication Tester	EUT

Block Diagram of Test Setup

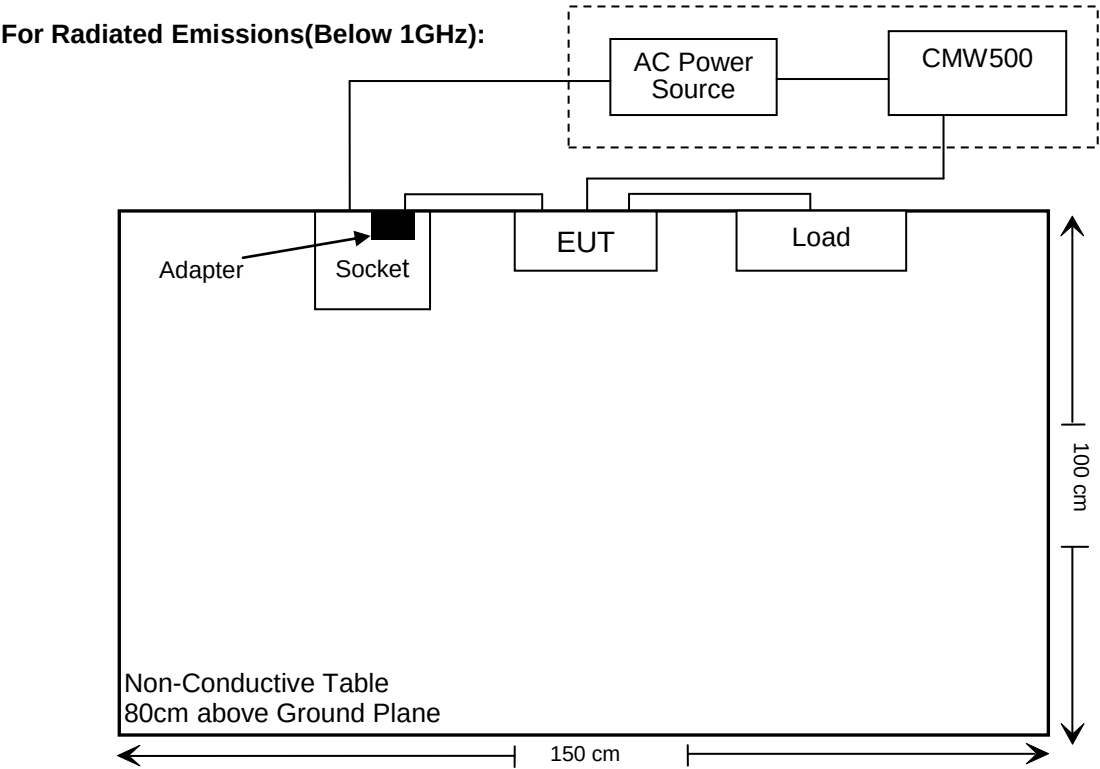

The diagram illustrates the experimental setup for antenna measurement. It features a large rectangular area representing the measurement space, divided into two horizontal sections by a dashed line. The top section is labeled "Non-Conductive Table 150cm above Ground Plane" and contains three components: a "CMW500" device, an "AC Power Source", and a "Socket". The "CMW500" and "AC Power Source" are connected by a solid line. The "AC Power Source" is connected to the "Socket" by a solid line. The "CMW500" is also connected to the "EUT" (Equipment Under Test) by a solid line. The "EUT" and "Load" are connected by a solid line. The "Socket" is connected to the "Adapter" by a solid line. The "Adapter" is connected to the "EUT" by a solid line. The bottom section is labeled "Non-Conductive Table 80cm above Ground Plane". The overall dimensions of the setup are indicated by arrows: a width of 150 cm and a height of 100 cm.

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§20.21(e)(3)	7.1 Authorized Frequency Band Verification	Compliance
§20.21(e)(8)(i)(D) §20.21(e)(8)(i)(B) §20.21(e)(4)	7.2 Maximum Power Measurement	Compliance
§20.21(e)(8)(i)(C)(2) §20.21(e)(8)(i)(B) §20.21(e)(4)	7.3 Maximum Booster Gain Computation	Compliance
§20.21(e)(8)(i)(B) §20.21(e)(3)	7.13 Spectrum block filtering test procedure	Not applicable
§20.21(e)(8)(i)(F)	7.4 Intermodulation Product	Compliance
§20.21(e)(8)(i)(E)	7.5 Out Of Band Emissions	Compliance
§20.21(e)(8)(i)(A) §20.21(e)(8)(i)(H) §20.21(e)(4)	7.7 Noise Limits	Compliance
§20.21(e)(8)(i)(I) §20.21(e)(4)	7.8 Uplink Inactivity	Compliance
§20.21(e)(8)(i)(C)(1) §20.21(e)(8)(i)(H)	7.9 Variable Booster Gain	Compliance
§2.1049	7.10 Occupied Bandwidth	Compliance
§20.21(e)(8)(ii)(A) §20.21(e)(4)	7.11 Oscillation Detection	Compliance
§2.1051	7.6 Spurious Emissions At Antenna Terminals	Compliance
§2.1053	7.12 Radiated Spurious Emissions	Compliance

Not applicable: This item only for wideband consumer boosters utilizing spectrum block filtering.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Spurious Emission Test(Below 1GHz)					
Rohde & Schwarz	Test Receiver	ESR	102725	2026/05/07	2027/05/06
SONOMA INSTRUMENT	Amplifier	310N	186131	2026/01/20	2027/01/19
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2026/01/23	2029/01/22
Agilent	Signal Generator	N5183A	MY47420360	2026/05/07	2027/05/06
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.12	N040	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.13	N300	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.14	N800	2026/05/07	2027/05/06
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Above 1GHz)					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101948	2026/05/07	2027/05/06
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2026/01/20	2027/01/19
Schwarzbeck	Horn Antenna	BBHA9120D	837	2026/01/29	2029/01/30
Unknown	RF Coaxial Cable	No.10	N050	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.11	N1000	2026/05/07	2027/05/06
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2023/12/12	2026/12/11
BACL	Amplifier	BACL-1313-A1840	4012521	2026/05/07	2027/05/06
Agilent	Signal Generator	N5183A	MY47420360	2026/05/07	2027/05/06
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606	2026/05/07	2027/05/06
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-655	2023/11/27	2026/11/26
PASTERNAK	Horn Antenna	PE9852/2F-20	1120-1	2026/01/29	2029/01/28
Unknown	RF Coaxial Cable	No.15	N600	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.16	N650	2026/05/07	2027/05/06
Test Software: e3 191218 (V9)					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101590	2026/05/07	2027/05/06
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606	2026/05/07	2027/05/06
BACL	Temp. & Humid. Chamber	BTH-150-40	30192	2026/05/07	2027/05/06
AGILENT	Vector Signal Generator	N5182A	MY50143401	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.31	RF-01	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.32	RF-02	2026/05/07	2027/05/06
Agilent	Attenuator	8496B	MY42141066	2025/09/18	2026/09/17
Agilent	Attenuator	8494B	MY42150993	2025/09/18	2026/09/17
WEINSCHEL	10dB Attenuator	5324	AU 3842	2026/01/20	2027/01/19
Mini-Circuits	Power Splitter	ZFRSC-183-S+	SF10944151S	2026/01/20	2027/01/19
Test Software: JDAutoTestSystem V1.0.0					

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen, Guangming) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

7.1 AUTHORIZED FREQUENCY BAND VERIFICATION

Applicable Standard

According to FCC § 20.21(e)(3) Frequency Bands

This test is intended to confirm that the signal booster only operates on the CMRS frequency bands authorized for use by the NPS. In addition, this test will identify the frequency at which the maximum gain is realized within each CMRS operational band, which then serves as a basis for subsequent tests.

Test Procedure

- Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output connected to the spectrum analyzer.
- Set the spectrum analyzer RBW for 100 kHz with the VBW $\geq 3 \times$ the RBW using a PEAK detector with the MAX HOLD function.
- Set the center frequency of the spectrum analyzer to the center of the operational band under test with a span of 1 MHz.
- Set the signal generator for CW mode and tune to the center frequency of the operational band under test.
- Set the initial signal generator power to a level that is at least 6 dB below the AGC level specified by the manufacturer.
- Slowly increase the signal generator power level until the output signal reaches the AGC operational level.
- Reduce the signal generator power to a level that is 3 dB below the level noted above and manually reset the EUT.
- Reset the spectrum analyzer span to $2 \times$ the CMRS band under test. Adjust the tuned frequency of the signal generator to sweep $2 \times$ the CMRS band using the sweep function. The AGC must not be activated throughout the entire sweep.
- Using three markers, identify the CMRS band edges and the frequency with the highest power. Affirm that the values of all markers are visible on the display of the spectrum analyzer (e.g., marker table set to on).
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.1c) to 7.1j) for all operational uplink and downlink bands.

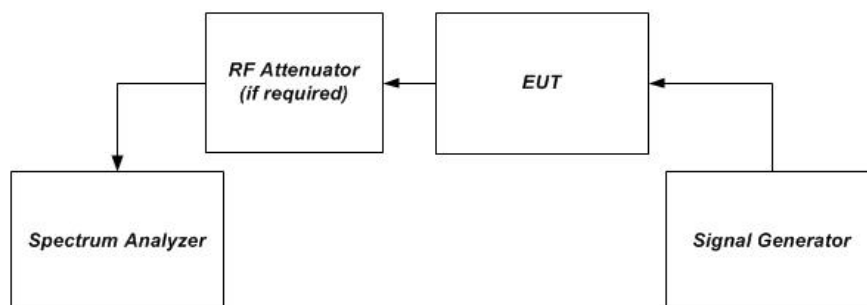


Figure 1 – Band verification test instrumentation setup

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.1.

7.2 MAXIMUM POWER MEASUREMENT

Applicable Standard

According to FCC § 20.21(e)(8)(i)(D) Power Limits; FCC § 20.21(e)(8)(i)(B) Bidirectional Capability (uplink minimum conducted power output); FCC §20.21(e)(4)Self-monitoring.

This procedure shall be used to demonstrate compliance to the signal booster power limits and requirements as specified in § 20.21(e)(8)(i)(D) and § 20.21(e)(8)(i)(B) for wideband consumer signal boosters.

- a) Compliance to authorized EIRP limits must be shown using the highest gains from the list of antennas, cabling, and coupling devices declared by the manufacturer for use with the consumer booster.
- b) In addition, the maximum power levels measured in this procedure will be utilized in calculating the maximum gain as described in the next subclause.
- c) The frequency with the highest power level in each operational band as determined in 7.1 is to be measured discretely by applying the following procedure utilizing the stated emission and power detector types independently.
- d) Use a signal generator to create a pulsed CW or GSM signal with a pulse width of 570 μ s and a duty cycle of 12.5% (i.e., one GSM timeslot), then measure utilizing the burst power function of the measuring instrument.
- e) Use a signal generator to create an AWGN signal with a 99% occupied bandwidth of 4.1 MHz, then measure utilizing the channel power or band power function of the measuring instrumentation.
- f) All modes of operation must be verified to maintain operation within authorized limits at the maximum uplink and downlink test levels per device type as defined in 5.4, by increasing the power level in 2 dB steps from the AGC level to the maximum input level specified in 5.5.

Test Procedure

- a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output (donor port) connected to the spectrum analyzer.
- b) Configure the signal generator and spectrum analyzer for operation on the frequency determined in 7.1 with the highest power level, but with the center frequency of the signal no closer than 2.5 MHz from the band edge. The spectrum analyzer span shall be set to at least 10 MHz.
- c) Set the initial signal generator power to a level well below that which causes AGC control.
- d) Slowly increase the signal generator power level until the output signal reaches the AGC operational limit (from observation of signal behavior on the spectrum analyzer; i.e., no further increase in output power as input power is increased).
- e) Reduce power sufficiently on the signal generator to ensure that the AGC is not controlling the power output.
- f) Slowly increase the signal generator power to a level just below (within 0.5 dB of) the AGC limit without triggering the AGC. Note the signal generator power level as P_{in} .
- g) Measure the output power P_{out} with the spectrum analyzer as follows.
 - 1) Set RBW = 100 kHz for AWGN signal type and 300 kHz for CW or GSM signal type.
 - 2) Set VBW $\geq 3 \times$ RBW.
 - 3) Select either the BURST POWER or CHANNEL POWER measurement tool, as required for each signal type. The channel power integration bandwidth shall be 99% occupied bandwidth (4.1 MHz).
 - 4) Select the RMS (power averaging) detector.
 - 5) Ensure that the number Note: This requirement
 - 6) Set sweep time = auto
 - 7) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

- h) Record the measured power level as P_{OUT} with one set of results for the GSM or CW input stimulus and another set of results for the AWGN input stimulus.
- i) Repeat step h) while increasing the signal generator amplitude in 2 dB steps until the maximum input level indicated in 5.5 is reached. If the booster has shut down at any point during the input power steps it should be noted and step h) shall be repeated at an input level 1 dB less than that found to cause the shutdown.
- j) Repeat the entire procedure for each operational uplink and downlink frequency band supported by the booster.
- k) Provide tabulated results in the test report.

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.2.

7.3 MAXIMUM BOOSTER GAIN COMPUTATION

Applicable Standards

According to FCC § 20.21(e)(8)(i)(C)(2) (ii)Booster Gain Limits (maximum gain); FCC § 20.21(e)(8)(i)(B) Bidirectional Capability (equivalent uplink and downlink gain); FCC §20.21(e)(4)Self-monitoring.

This subclause provides guidance on the computation of the maximum gain based on the results obtained from previous measurements. The NPS limits on maximum gain for fixed and mobile wideband consumer signal boosters are provided in § 20.21(e)(8)(i)(C)(2). Additionally, § 20.21(e)(8)(i)(B) requires that wideband consumer signal boosters be able to provide equivalent uplink and downlink gain (within 9 dB)

Test Procedure

- a) Calculate the maximum gain of the booster as follows to demonstrate compliance to the applicable gain limits as specified.
- b) For both the uplink and downlink in each supported frequency band, use each of the POUT and PIN result pairs for all signal types used in 7.2 in the following equation to determine the maximum gain (G) of the booster:
$$G \text{ (dB)} = \text{POUT(dBm)} - \text{PIN(dBm)}.$$
- c) Record the maximum gain of the uplink and downlink paths for each supported frequency band, and verify that the each gain value complies with the applicable limit.
- d) Provide tabulated results in the test report.

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.3.

7.4 INTERMODULATION PRODUCT

Applicable Standards

According to FCC § 20.21(e)(8)(i)(f) Intermodulation Limits.

Test Procedure

The following procedures shall be used to demonstrate compliance to the intermodulation limit specified in § 20.21(e)(8)(i)(F) for wideband consumer signal boosters.

- Connect the signal booster to the test equipment as shown in **Figure 2**. Begin with the uplink output connected to the spectrum analyzer.
- Set the spectrum analyzer RBW = 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Select the RMS detector
- Set the spectrum analyzer center frequency to the center of the supported operational band under test.
- Set the span to 5 MHz. Affirm that the number of measurement points per sweep $\geq (2 \times \text{span})/\text{RBW}$.
- Configure the two signal generators for CW operation with generator 1 tuned 300 kHz below the operational band center frequency and generator 2 tuned 300 kHz above the operational band center frequency.
- Set the signal generator amplitudes so that the power from each into the RF combiner is equivalent, then turn on the RF output.
- Increase the signal generators' amplitudes equally until just before the EUT begins AGC and affirm that all intermodulation products (if any exist) are below the specified limit of -19 dBm.
- Utilize the trace averaging function of the spectrum analyzer and wait for the trace to stabilize. Place a marker at the highest amplitude intermodulation product.
- Record the maximum intermodulation product amplitude level that is observed.
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.4e) to 7.4l) for all uplink and downlink operational bands.

Note: If using a single signal generator with dual outputs, affirm that intermodulation products are not the result of the generator.

- Increase the signal generator amplitude in 2 dB steps to 10 dB above the AGC threshold determined in 7.4i), but to not to exceed the maximum input level in 5.5, to affirm that the EUT maintains compliance with the intermodulation limit

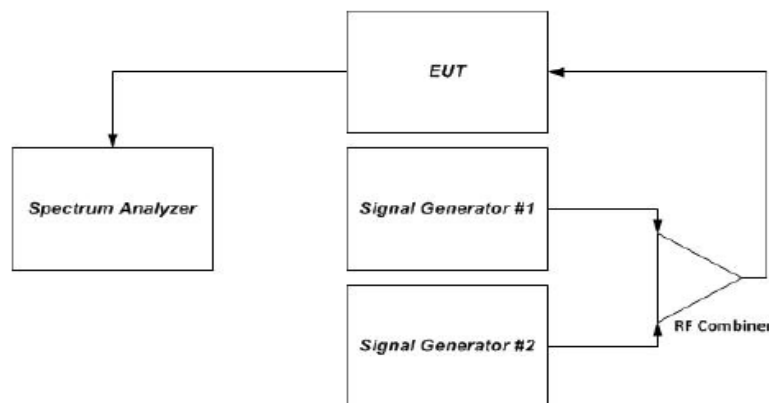


Figure 2 – Intermodulation product instrumentation test setup

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.4.

7.5 OUT OF BAND EMISSIONS

Applicable Standards

According to FCC § 20.21(e)(8)(i)(E) Out of Band Emission Limits.

Test Procedure

This measurement is intended to demonstrate compliance to the limit specified in § 20.21(e)(8)(i)(E). The mobile emission limit applicable to the supported band of operation can be determined from the applicable rule part as listed in Annex A for each authorized operating band.

a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output connected to the spectrum analyzer.

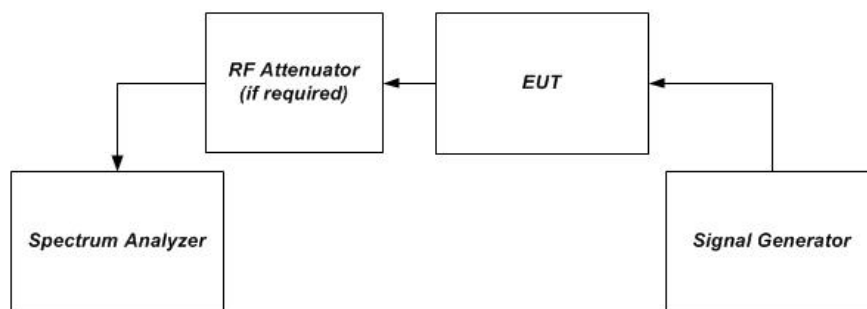


Figure 1 – Band verification test instrumentation setup

b) Configure the signal generator for the appropriate operation for all uplink and downlink bands:

- i) GSM: 0.2 MHz from upper and lower band edges.
- ii) LTE (5 MHz): 2.5 MHz from upper and lower band edges.

iii) CDMA: 1.25 MHz from upper and lower band edges, except for cellular band as follows (only the upper and lower frequencies need to be tested):

824.88 MHz, 845.73 MHz, 836.52 MHz, 848.10 MHz, 869.88 MHz, 890.73 MHz, 881.52 MHz, 893.10 MHz.

Note 1: Alternative test modulation types:

- CDMA (alternative 1.25 MHz AWGN)
- LTE 5 MHz (alternative W-CDMA or 4.1 MHz AWGN)

Note 2: For LTE, the signal generator should utilize the uplink and downlink signal types for these modulations in uplink and downlink tests, respectively. LTE shall use 5 MHz signal, 25 resource blocks transmitting.

Note 3: When using an AWGN test signal, the bandwidth shall be the measured 99% occupied bandwidth.

c) Set the signal generator amplitude to the maximum power level prior to AGC similar to the procedures in 7.2.2e) to 7.2.2f) of power measurement procedure for appropriate modulations.

d) Set RBW = measurement bandwidth specified in the applicable rule section for the supported frequency band (see Annex A for cross-reference to applicable rule section).

e) Set VBW = 3 × RBW.

f) Select the RMS (power averaging) detector.

g) Sweep time = auto-couple.

h) Set the analyzer start frequency to the upper band/block edge frequency and the stop frequency to the upper band/block edge frequency plus 300 kHz (when operational frequency is < 1 GHz) or 3 MHz (when operational frequency is ≥ 1 GHz).

i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

- j) Use peak marker function to find the maximum power level.
- k) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- l) Increase the signal generator amplitude in 2 dB steps until the maximum input level indicated in 5.5 is reached. Affirm that the EUT maintains compliance with the OOB limits.
- m) Reset the analyzer start frequency to the lower band/block edge frequency minus 300 kHz (when operational frequency is < 1 GHz) or 3 MHz (when operational frequency is $\geq$ 1 GHz), and the stop frequency to the lower band/block edge frequency and repeat 7.5j) to 7.5l).
- n) Repeat 7.5b) through 7.5m) for each uplink and downlink operational band.

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.11.

7.7 NOISE LIMITS


Applicable Standards

According to FCC § 20.21(e)(8)(i)(A) Noise Limits; FCC § 20.21(e)(8)(i)(H) Transmit Power Off Mode (uplink and downlink noise power); FCC §20.21(e)(4)Self-monitoring.


Test Procedure

Maximum transmitter noise power level

a) Connect the EUT to the test equipment as shown in Figure 3. Begin with the uplink output connected to the spectrum analyzer. When measuring downlink noise, connect the downlink output to the spectrum analyzer.

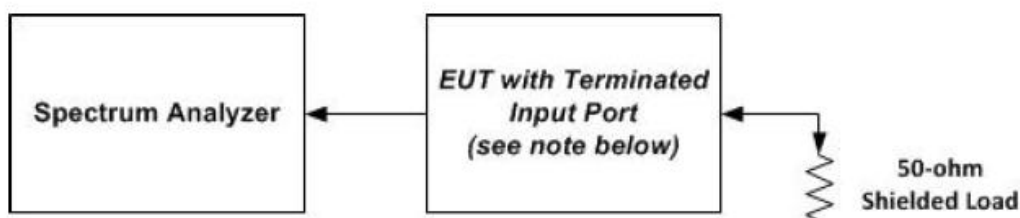

- b) Set the spectrum analyzer RBW to 1 MHz with the VBW $\geq 3 \times$ RBW.
- c) Select the power averaging (RMS) detector and trace average over at least 100 traces.
- d) Set the center frequency of the spectrum analyzer to the center of the CMRS band under test with the span $\geq 2 \times$ the CMRS band.
- e) Measure the maximum transmitter noise power level.
- f) Save the spectrum analyzer plot as necessary for inclusion in the final test report.
- g) Repeat 7.7b) to 7.7f) for all operational uplink and downlink bands.
- h) Connect the EUT to the test equipment as shown in Figure 4 for uplink. Affirm the coupled path of the RF coupler is connected to the spectrum analyzer.

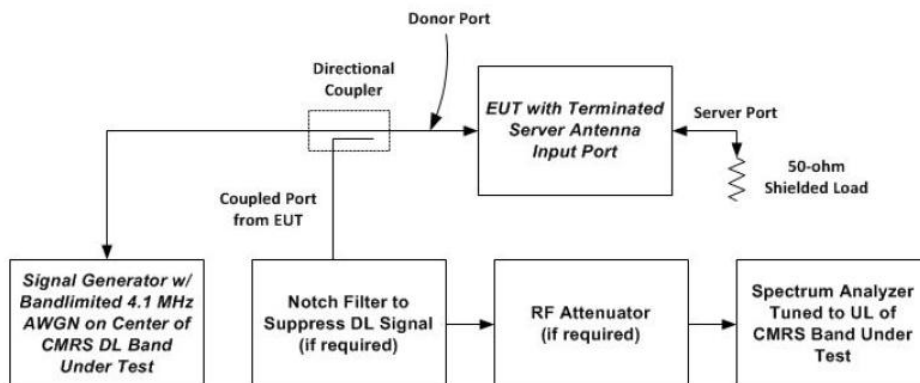

- i) Configure the signal generator for 4.1 MHz AWGN operation.
- j) Set the spectrum analyzer RBW for 1 MHz with the VBW $\geq 3 \times$ RBW with a power averaging (rms) detector with at least 100 trace averages.
- k) Set the center frequency of the spectrum analyzer to the center of the CMRS band under test with the span $\geq 2 \times$ the CMRS band. This shall include all spectrum blocks in the particular CMRS band under test (see Annex A).

- l) For uplink noise measurements, set the spectrum analyzer center frequency for the uplink band under test and tune the signal generator to the center of the paired downlink band.
- m) Measure the maximum transmitter noise power level when varying the downlink signal generator output level from -90 dBm to -20 dBm, as measured at the input port, in 1 dB steps inside the RSSI-dependent region and in 10 dB steps outside the RSSI-dependent region. Report the six values closest to the limit with at least two points within the RSSI-dependent region of the limit. See noise limit in Annex D.
- n) Repeat 7.7.1h) through 7.7.1m) for all operational uplink.

Variable uplink noise timing

Variable uplink noise timing is to be measured as follows.

- a) Set the spectrum analyzer to the uplink frequency to be measured.
- b) Set the span to 0 Hz with a sweep time of 10 seconds.
- c) Set the power level of signal generator 1 to the lowest level of the RSSI-dependent noise.
- d) Select MAX HOLD and increase the power level of signal generator 1 by 10 dB for mobile boosters and 20 dB for fixed boosters.
- e) Confirm that the uplink noise decreases to the specified level within 1 second for mobile devices and 3 seconds for fixed devices
- f) Repeat 7.7.2a) to 7.7.2e) for all operational uplink bands.
- g) Include plots and summary table in test report.

Note: Some signal boosters will require a signal generator input because they will not operate unless a signal is received at the input terminals. If this is the case, connect a second signal generator and cycle the RF output to simulate this function.

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.5.

7.8 UPLINK INACTIVITY


Applicable Standards

According to FCC § 20.21(e)(8)(i)(I) Uplink Inactivity & FCC §20.21(e)(4); FCC §20.21(e)(4)Self-monitoring.

Test Procedure

This measurement procedure is intended to demonstrate compliance to the uplink inactivity requirements specified for wideband consumer signal boosters in § 20.21(e)(8)(i)(I).

a) Connect the EUT to the test equipment as shown in Figure 3 with the uplink output connected to the spectrum analyzer.

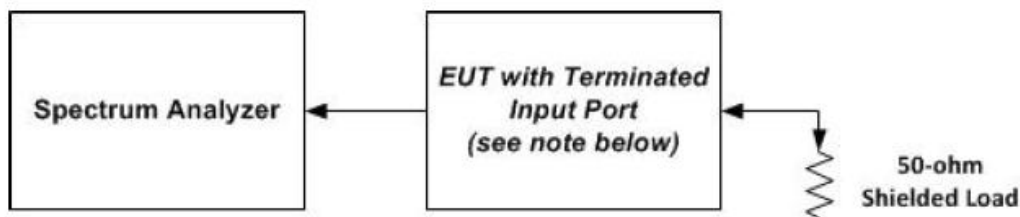

- b) Select the RMS power averaging detector.
- c) Set the spectrum analyzer RBW for 1 MHz with the VBW $\geq 3 \times$ RBW.
- d) Set the center frequency of the spectrum analyzer to the center of the uplink operational band.
- e) Set the span for 0 Hz with a single sweep time for a minimum of 330 seconds.
- f) Start to capture a new trace using MAX HOLD.
- g) After approximately 15 seconds turn on the EUT power.
- h) Once the full spectrum analyzer trace is complete place a MARKER on the leading edge of the pulse and use the DELTA MARKER METHOD to measure the time until the uplink becomes inactive.
- i) Affirm that the noise level for the squelched signal is below the uplink inactivity noise power limit, as specified by the rules.
- j) Capture the plot for inclusion in the test report.
- k) Measure noise using procedures in 7.7.1a) to 7.7.1f).
- l) Repeat 7.8d) through 7.8k) for all operational uplink bands.

Note: Some signal boosters will require a signal generator input because they will not operate unless a signal is received at the input terminals. If this is the case, connect a signal generator and cycle the RF output to simulate this function.

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.6.

7.9 VARIABLE BOOSTER GAIN

Applicable Standards

Rule paragraph(s): FCC § 20.21(e)(8)(i)(C)(1) Booster Gain Limits (variable gain); FCC § 20.21(e)(8)(i)(H) Transmit Power Off Mode (uplink gain).

Test Procedure

Maximum gain

This procedure shall be used to demonstrate compliance to the booster gain limits specified for wideband consumer signal boosters in § 20.21(e)(8)(i)(C) or § 20.21(e)(8)(i)(H). The variable booster gain limits are expressed as a function of RSSI and MSCL. The RSSI is varied over a range of values as specified within the procedure. Refer to Annex B of this document for guidance on determining the applicable MSCL value.

- a) Connect the EUT to the test equipment as shown in **Figure 5** with the uplink output connected to signal generator 1. Confirm that the coupled path of the RF coupler is connected to the spectrum analyzer.
- b) Configure downlink signal generator 1 for AWGN operation with a 99% occupied bandwidth of 4.1 MHz tuned to the center of the operational band.
- c) Set the power level and frequency of signal generator 2 to a value 5 dB below the AGC level determined from 7.2. The signal type is AWGN with a 99% OBW of 4.1 MHz.
- d) Set RBW = 100 kHz.
- e) Set VBW ≥ 300 kHz.
- f) Select the CHANNEL POWER measurement mode.
- g) Select the RMS (power averaging) detector.
- h) Ensure that the number of measurement points per sweep $\geq (2 \times \text{span})/\text{RBW}$.
- i) Sweep time = auto couple or as necessary (but no less than auto couple value).
- j) Trace average at least 10 traces in power averaging (i.e., RMS) mode.
- k) Measure the maximum channel power and compute maximum gain when varying the signal generator 1 output to a level from -90 dBm to -20 dBm as measured at the input port in 1 dB steps inside the RSSI-dependent region and 10 dB steps outside the RSSI-dependent region and report the six values closest to the limit, including at least two points from within the RSSI-dependent region of operation. See gain limit in charts in Annex D for uplink gain requirements. Additionally, document that the EUT provides equivalent uplink and downlink gain, and when operating in shutoff mode the uplink and downlink gain is within the transmit power off mode gain limits.
- l) Repeat 7.9.1b) to 7.9.1k) for all operational uplink bands.

Variable uplink gain timing

Variable uplink gain timing is to be measured as follows.

- Set the spectrum analyzer to the uplink frequency to be measured.
- Set the span to 0 Hz with a sweep time of 10 seconds.
- Set the power level of signal generator 1 to the lowest level of the RSSI-dependent gain.
- Select MAX HOLD and increase the power level of signal generator 1 by 10 dB for mobile boosters and 20 dB for fixed indoor boosters. Signal generator 2 remains same, as described in 7.9.1c).
- Confirm that the uplink gain decreases to the specified levels within 1 second for mobile devices and 3 seconds for fixed devices.
- Repeat 7.9.2a) to 7.9.2e) for all operational uplink bands.

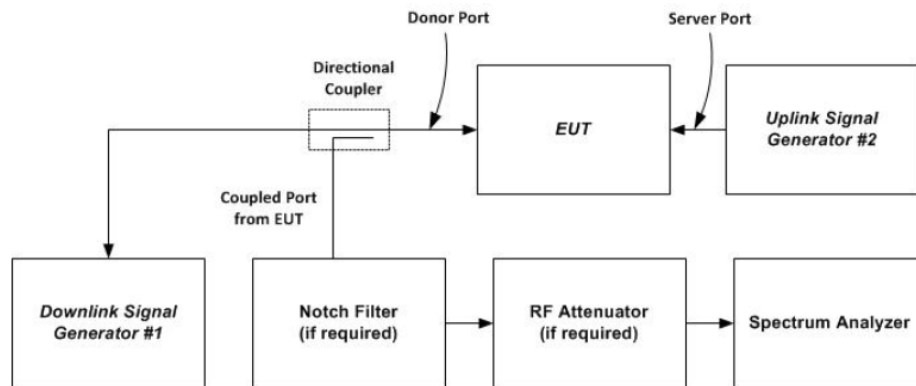


Figure 5 – Variable gain instrumentation test setup

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.7.

7.10 OCCUPIED BANDWIDTH

Applicable Standards

According to FCC § 2.1049 Measurements required: Occupied bandwidth.

Test Procedure

This measurement is required to compare the uniformity of the output signal relative to the input signal and to satisfy the requirements of § 2.1049.

- a) Connect the test equipment as shown in Figure 6 to measure the characteristics of the test signals produced by the signal generator.
- b) Set VBW to $\geq 3 \times \text{RBW}$.
- c) Set the center frequency of the spectrum analyzer to the center of the operational band. The span will be adjusted for each modulation type and occupied bandwidth as necessary for accurately viewing the signals.
- d) Set the signal generator for power level to match the values obtained in 7.2.
- e) Set the signal generator modulation type for GSM with a PRBS pattern and allow the trace on the signal generator to stabilize adjusting the span as necessary.
- f) Set the spectrum analyzer RBW for 1% to 5% of the emissions bandwidth.
- g) Capture the spectrum analyzer trace for inclusion in the test report.
- h) Repeat 7.10c) to 7.10g) for CDMA and W-CDMA modulation adjusting the span as necessary for all uplink and downlink operational bands. AWGN or LTE may be used in place of W-CDMA, as an option.
- i) Connect the test equipment as shown in **Figure 1**. Begin with the uplink output connected to the spectrum analyzer.
- j) Repeat 7.10c) to 7.10h) in this new configuration.

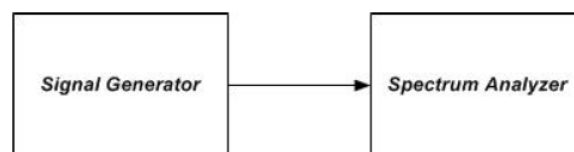


Figure 6 – Occupied bandwidth instrumentation test setup

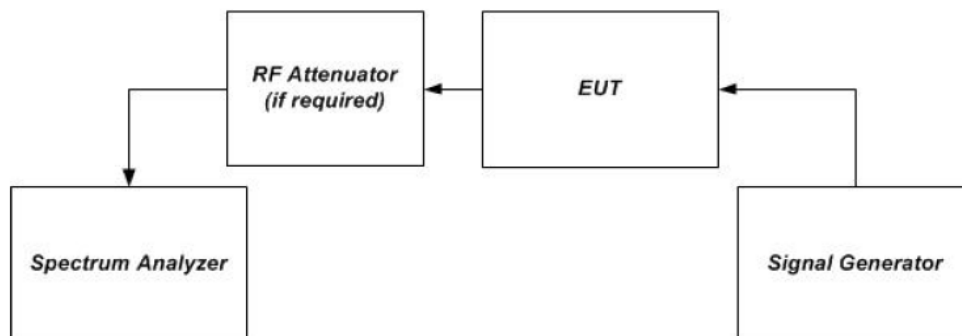


Figure 1 – Band verification test instrumentation setup

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.8.

7.11 OSCILLATION DETECTION

Applicable Standards

Rule paragraph(s): FCC § 20.21(e)(8)(ii)(A) Anti-Oscillation, FCC §20.21(e)(4) Self-monitoring

For this measurement two EUTs will be permitted, one operating in a normal mode and the second operating in a test mode that is capable of disabling the uplink inactivity squelching and or a reduction of the time between restarts to 5 seconds. This will greatly decrease the test time required.

NOTE — Consumer boosters certified as direct connection mobile boosters having gain of less than or equal to 15 dB are exempt from compliance to testing procedures in 7.11.3 and 7.11.4.

Test Procedure

According to KDB 935210 D03 Signal Booster Measurements v04, §7.11.2 Oscillation restart tests and §7.11.3 Test procedure for measuring oscillation mitigation or shutdown

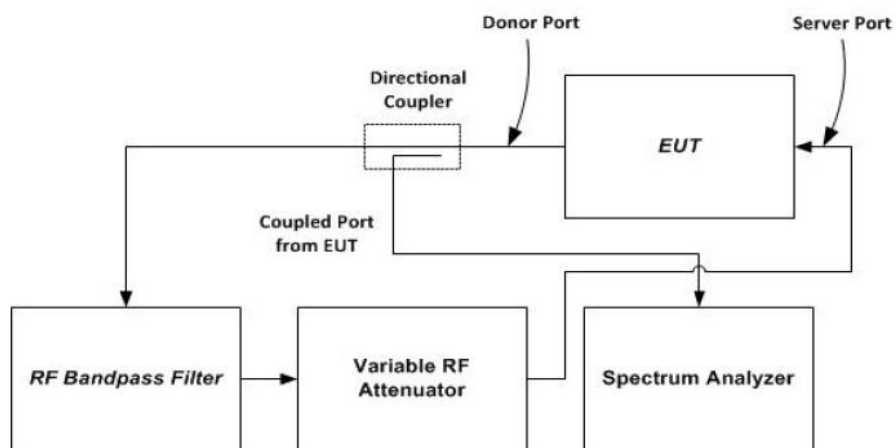


Figure 7 – Oscillation detection instrumentation test setup

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.9.

7.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standards

FCC § 2.1051 Measurements required: Spurious emissions at antenna terminals.

FCC § 20.21(e)(8)(i)(E): Booster out of band emissions (OOBE) shall be at least 6 dB below the FCC's mobile emission limits for the supported bands of operation. Compliance to OOBE limits will utilize high peak-to-average CMRS signal types.

FCC § 22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC § 24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

§27.53: the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

Test Procedure

The following procedures shall be used to demonstrate compliance to the applicable conducted spurious emissions limits as per § 2.1051.

Note: For frequencies below 1 GHz, an RBW of 1 MHz may be used in a preliminary measurement. If non-compliant emissions are detected, a final measurement shall be made with a 100 kHz RBW. Additionally, a peak detector may also be used for the preliminary measurement. If non-compliant emissions are detected then a final measurement of these emissions shall be made with the power averaging (RMS) detector.

- a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output connected to the spectrum analyzer.
- b) Configure the signal generator for AWGN with a 99% occupied bandwidth of 4.1 MHz with a center frequency corresponding to the center of the CMRS band under test.
- c) Set the signal generator amplitude to the level determined in the power measurement procedure in 7.2.
- d) Turn on the signal generator RF output and measure the spurious emission power levels with an appropriate measurement instrument as follows.
 - 1) Set RBW = measurement bandwidth specified in the applicable rule section for the operational frequency band under consideration (see Annex A for relevant cross-references). Note that many of the individual rule sections permit the use of a narrower RBW (typically $\geq 1\%$ of the emission bandwidth) to enhance measurement accuracy, but the result must then be integrated over the specified measurement bandwidth.
 - 2) Set VBW = $3 \times$ RBW.
 - 3) Select the power averaging (RMS) detector. (See above note regarding the use of a peak detector for preliminary measurements.)
 - 4) Sweep time = auto-couple.
 - 5) Set the analyzer start frequency to the lowest radio frequency signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part. Note that the number of measurement points in each sweep

must be $\geq (2 \times \text{span/RBW})$ which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the spectrum analyzer. Trace average at least 10 traces in power averaging (i.e., RMS) mode.

6) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.

7) Reset the analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the analyzer stop frequency to $10 \times$ the highest frequency of the fundamental emission. Note that the number of measurement points in each sweep must be $\geq (2 \times \text{span/RBW})$ which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.

8) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report.

e) Repeat 7.6b) through 7.6d) for each supported frequency band of operation.

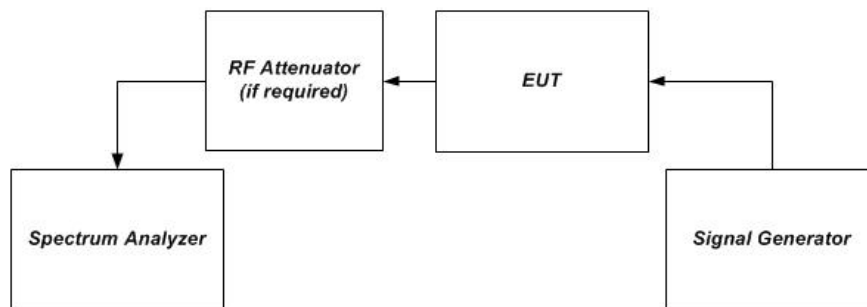


Figure 1 – Band verification test instrumentation setup

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.2.10.

7.12 RADIATED SPURIOUS EMISSIONS

Applicable Standards

FCC § 2.1053 Measurements required: Field strength of spurious radiation.

Test Procedure

This procedure is intended to satisfy the requirements specified in § 2.1053. The applicable limits are those specified for mobile emissions in the rule part appropriate to the band of operation (see Annex A).

- Place the EUT on an OATS or semi-anechoic chamber turntable 3 m from the receiving antenna. 12
- Connect the EUT to the test equipment as shown in Figure 10 beginning with the uplink output.
- Set the signal generator to produce a CW signal with the frequency set to the center of the operational band under test and the power level set at PIN as determined from 7.2.
- Measure the radiated spurious emissions from the EUT from lowest to the highest frequencies as specified in § 2.1057. Maximize the radiated emissions by utilizing the procedures described in Clause 8 of ANSI C63.4-2014.
- Capture the peak emissions plots using a peak detector with Max-Hold for inclusion in the test report. Tabular data is acceptable in lieu of spectrum analyzer plots.
- Repeat 7.12c) through 7.12e) for all operational bands.

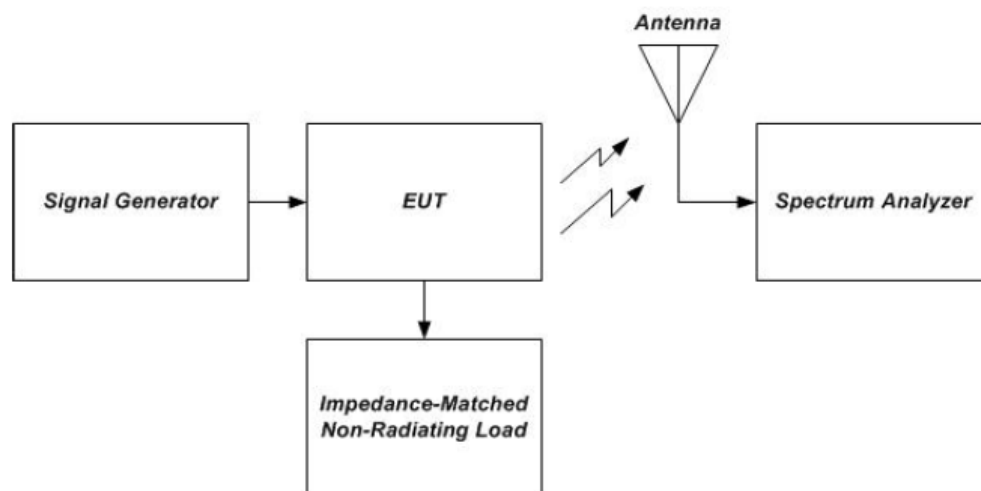


Figure 10 – Radiated spurious emissions test instrumentation setup

Test Data

Test Result: Please refer to the Attachment of 2604T01718E-RF-00A_Appendix A.1.

EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the Attachment No.1 2604T01718E-RF EUT External Photos and Attachment No.2 2604T01718E-RF EUT Internal Photos.

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the Attachment No.3 2604T01718E-RFA Test Photos.

******* END OF REPORT *******