FCC TEST REPORT

Test report
On Behalf of
Shenzhen Four Seas Global Link Network Technology Co., Ltd.
For
Wireless AP
Model No.: CF-EW72, CF-EW71, CF-EW73, CF-EW74, CF-EW75, CF-E5, CF-E7, CF-WA900 V2, CF-E313AC, CF-WR754AC, CF-WR755AC

FCC ID: OYR-CF-EW72

Prepared for :	**Shenzhen Four Seas Global Link Network Technology Co., Ltd** **Room 607-610, Block B, TAOJINDI Electronic Business Incubation Base, Tenglong Road, Longhua District, Shenzhen, China**
Prepared By :	**Shenzhen HUAK Testing Technology Co., Ltd.** **1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China**

Date of Test:	**Aug. 02, 28, 2019 ~Aug. 13, 2019**
Date of Report:	**Aug. 13, 2019**
Report Number:	**HK1907291852-2E**

TEST RESULT CERTIFICATION

Applicant's name.....:	Shenzhen Four Seas Global Link Network Technology Co., Ltd.
Address .....:	Room 607-610, Block B, TAOJINDI Electronic Business Incubation Base, Tenglong Road, Longhua District, Shenzhen, China.
Manufacture's Name.....:	Shenzhen Four Seas Global Link Network Technology Co., Ltd.
Address .....:	Room 607-610, Block B, TAOJINDI Electronic Business Incubation Base, Tenglong Road, Longhua District, Shenzhen, China
Product description	
Trade Mark:	COMFAST
Product name.....:	Wireless AP
Model and/or type reference .:	CF-EW72, CF-EW71, CF-EW73, CF-EW74, CF-EW75, CF-E5, CF-E7, CF-WA900 V2, CF-E313AC, CF-WR754AC, CF-WR755AC
Standards .....:	FCC Rules and Regulations Part 15 Subpart C Section 15.407 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test.....:	
Date (s) of performance of tests .....:	**Aug. 02, 28, 2019 ~Aug. 13, 2019**
Date of Issue.....:	**Aug. 13, 2019**
Test Result.....:	Pass

Prepared by: Gary Qian

Project Engineer

Reviewed by: Leo Zhang

Project Supervisor

Approved by: James Zhou

Technical Director

TABLE OF CONTENTS

1. Test Result Summary 4
   1.1. TEST PROCEDURES AND RESULTS 4
   1.2. TEST FACILITY 4
   1.3. MEASUREMENT UNCERTAINTY 5
2. EUT Description 6
   2.1. GENERAL DESCRIPTION OF EUT 6
   2.2. OPERATION FREQUENCY EACH OF CHANNEL 7
   2.3. OPERATION OF EUT DURING TESTING 7
   2.4. DESCRIPTION OF TEST SETUP 8
3. Genera Information 9
   3.1. TEST ENVIRONMENT AND MODE 9
   3.2. DESCRIPTION OF SUPPORT UNITS 10
4. Test Results and Measurement Data 11
   4.1. CONDUCTED EMISSION 11
   4.2. MAXIMUM CONDUCTED OUTPUT POWER 13
   4.3. 6DB EMISSION BANDWIDTH 18
   4.4. 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH 19
   4.5. POWER SPECTRAL DENSITY 36
   4.6. BAND EDGE 54
   4.7. SPURIOUS EMISSION 81
   4.8. FREQUENCY STABILITY MEASUREMENT 88
   4.9. ANTENNA REQUIREMENT 90
   4.10. PHOTOGRAPHS OF TEST SETUP 90

1. Test Result Summary

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a) §2.1046	PASS
6dB Emission Bandwidth	§15.407(e)	PASS
26dB Emission Bandwidth& 99% Occupied Bandwidth	§15.407(a) §2.1049	PASS
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(a)	PASS
Radiated Emission	§15.407(a) §2.1053	PASS
Frequency Stability	§15.407(g) §2.1055	PASS

Note:

1. PASS: Test item meets the requirement.

2. Fail: Test item does not meet the requirement.

3. N/A: Test case does not apply to the test object.

4. The test result judgment is decided by the limit of test standard.

1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

1.3. Measurement Uncertainty

The reported uncertainty of measurement y ± U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	±2.56dB
2	RF power, conducted	±0.12dB
3	Spurious emissions, conducted	±0.11dB
4	All emissions, radiated(<1G)	±3.92dB
5	All emissions, radiated(>1G)	±4.28dB
6	Temperature	±0.1°C
7	Humidity	±1.0%

2. EUT Description

2.1. GENERAL DESCRIPTION OF EUT

Equipment	Wireless AP
Model Name	CF-EW72
Serial No.	CF-EW71, CF-EW73, CF-EW74, CF-EW75, CF-E5, CF-E7, CF-WA900 V2, CF-E313AC, CF-WR754AC, CF-WR755AC
Trade Mark	COMFAST
Model Difference	All model's the function, software and electric circuit are the same, only with a product outward and model named different. Test sample model: CF-EW72
FCC ID	OYR-CF-EW72
Operation Frequency:	IEEE 802.11a/n/ac(HT20) 5.180GHz-5.240GHz IEEE 802.11n/ac(HT40) 5.190GHz-5.230GHz IEEE 802.11ac(HT80) 5.210GHz
Modulation Technology:	IEEE 802.11a/n/ac
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Antenna Type	External Antenna
Antenna Gain	Antenna 1:1dBi Antenna 2:1dBi MIMO: 4.010dBi
Power Source	DC48V, 0.32A from Adapter With AC100-240V, 50/60Hz, 0.6A Max.
Power Supply:	DC48V, 0.32A from Adapter With AC100-240V, 50/60Hz, 0.6A Max.
Note: The EUT incorporates a MIMO function. Physically, it provides two completed transmitte rs and receivers(2T2R), two transmit signals are completely correlated, then, Direction g ain=GANT+10*log(2)dBi.	

2.2. Operation Frequency each of channel

802.11a/802.11n(HT20) 802.11ac(HT20)		802.11n(HT40)/ 802.11ac(HT40)		802.11ac(HT80)	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT during testing

For 802.11a/n (HT20)/ac(HT20)

Band I (5150 - 5250 MHz)		
Channel Number	Channel	Frequency (MHz）
36	Low	5180
40	Mid	5200
48	High	5240

For 802.11n (HT40)/ ac(HT40)

Band I (5150 - 5250 MHz)		
Channel Number	Channel	Frequency (MHz）
38	Low	5190
46	High	5230

For 802.11ac(HT80)

Band I (5150 - 5250 MHz)	
Channel Number	Frequency (MHz）
42	5210

2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and Radiation testing:

Operation of EUT during Above1GHz Radiation testing:



- PC information
  Model: TP00067A
  Input: DC20V, 2.25/3.25A
  Output: 5VDC, 1A

- Adapter information
  Model: R012-4800320Z
  Input: AC10-240V, 50-60Hz, 0.6A Max.
  Output: 48VDC, 0.32A

3. Genera Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(HT20)/ac(HT40)/ac(HT80)	/
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

4. Test Results and Measurement Data

4.1. Conducted Emission

4.1.1. Test Specification

<table>
<tr><td>Test Requirement:</td><td>FCC Part15 C Section 15.207</td></tr>
<tr><td>Test Method:</td><td>ANSI C63.10:2013</td></tr>
<tr><td>Frequency Range:</td><td>150 kHz to 30 MHz</td></tr>
<tr><td>Receiver setup:</td><td>RBW=9 kHz, VBW=30 kHz, Sweep time=auto</td></tr>
<tr><td>Limits:</td><td>
<table>
<tr><td rowspan="2">Frequency range (MHz)</td><td colspan="2">Limit (dBuV)</td></tr>
<tr><td>Quasi-peak</td><td>Average</td></tr>
<tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr>
<tr><td>0.5-5</td><td>56</td><td>46</td></tr>
<tr><td>5-30</td><td>60</td><td>50</td></tr>
</table>
</td></tr>
<tr><td>Test Setup:</td><td>
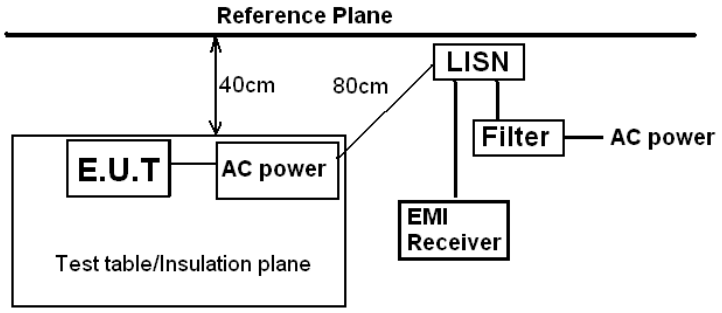

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedence Stabilization Network
Test table height=0.8m
</td></tr>
<tr><td>Test Mode:</td><td>Tx Mode</td></tr>
<tr><td>Test Procedure:</td><td>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</td></tr>
<tr><td>Test Result:</td><td>PASS</td></tr>
</table>

4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2019
LISN	R&S	ENV216	HKE-002	Dec. 27, 2019
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Dec. 27, 2019
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.1.3. Test data

All the test modes completed for test. only the worst result of AC240V/60Hz(802.11a at 5180MHz) was reported as below:
Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

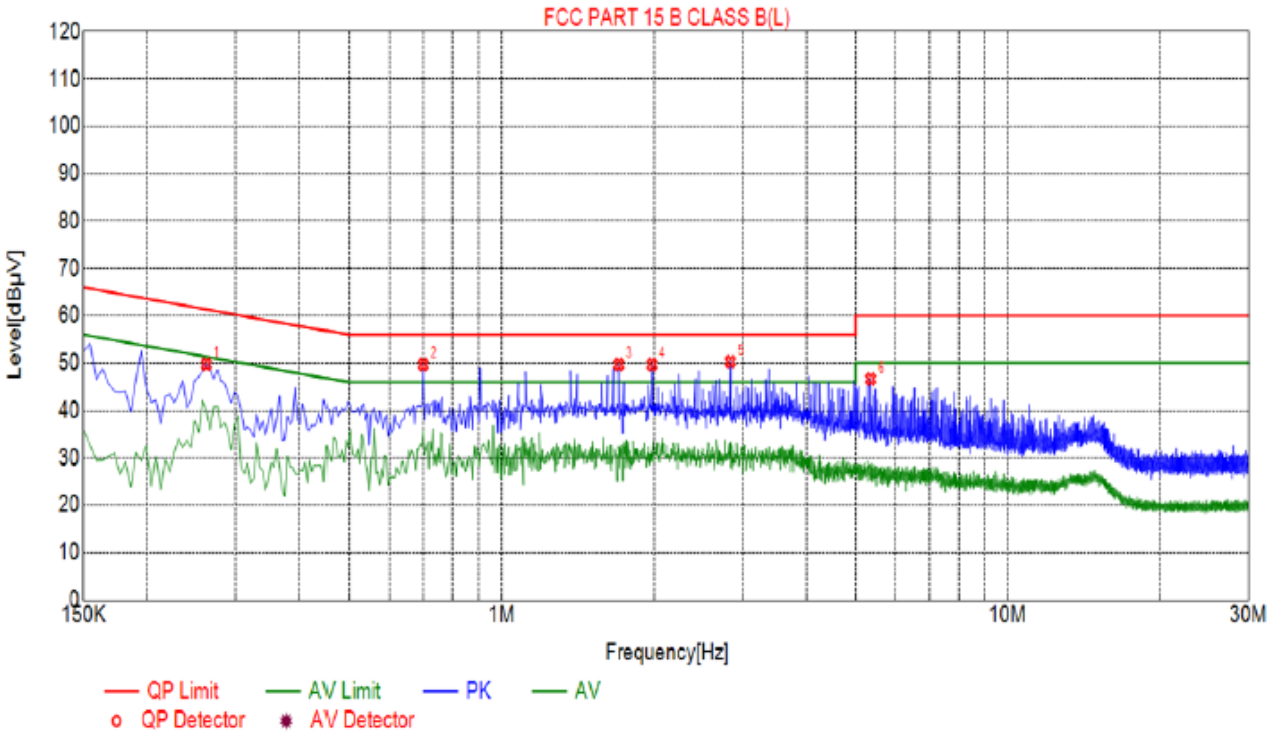

Suspected List						
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.2625	49.77	10.03	61.35	11.58	PK
2	0.6990	49.71	10.05	56.00	6.29	PK
3	1.7025	49.71	10.13	56.00	6.29	PK
4	1.9815	49.69	10.14	56.00	6.31	PK
5	2.8320	50.31	10.21	56.00	5.69	PK
6	5.3655	46.68	10.26	60.00	13.32	PK

Remark:
Margin = Limit – Level
Level=Test receiver reading + factor
Factor= Antenna factor + cable loss- Amp factor

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

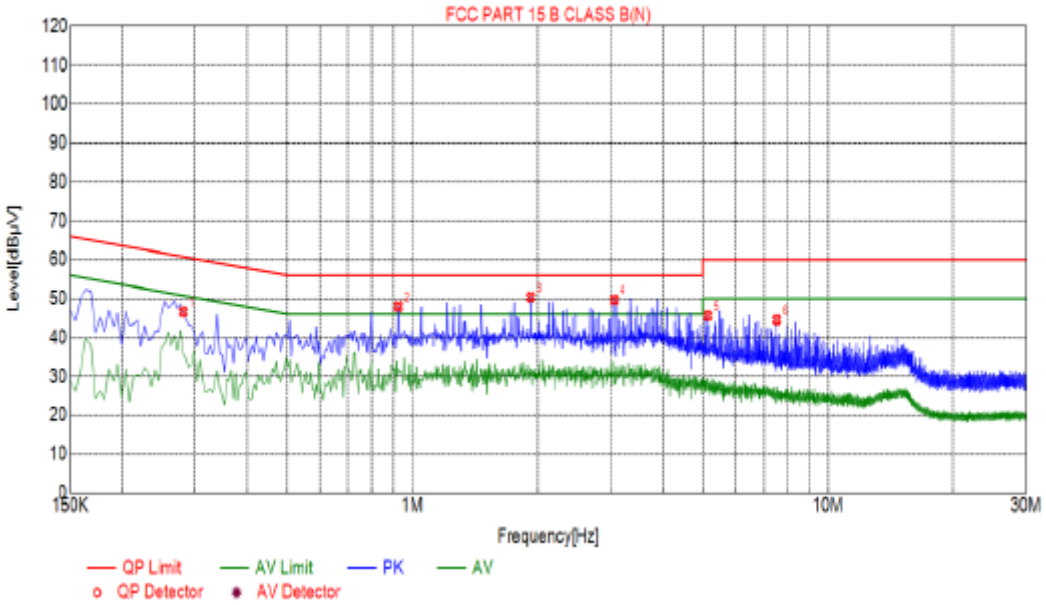

Suspected List						
NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.2805	46.59	10.04	60.80	14.21	PK
2	0.9240	47.98	10.06	56.00	8.02	PK
3	1.9275	50.40	10.14	56.00	5.60	PK
4	3.0570	49.71	10.22	56.00	6.29	PK
5	5.1450	45.60	10.26	60.00	14.40	PK
6	7.5255	44.55	10.17	60.00	15.45	PK

Remark:
Margin = Limit – Level
Level=Test receiver reading + factor
Factor= Antenna factor + cable loss- Amp factor

4.2. Maximum Conducted Output Power

4.2.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E
Limit:	Frequency Band (MHz) / Limit 5150-5250 / 250mW for client devices 5725-5850 / 1 W
Test Setup:	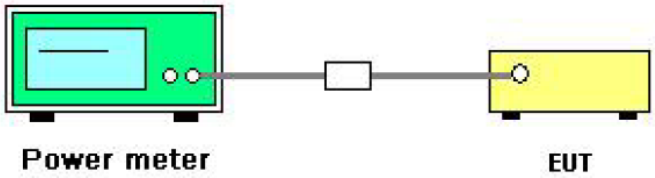
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 5. Measure the conducted output power and record the results in the test report.
Test Result:	PASS
Remark:	Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power

4.2.2. Test Instruments

RF Test Room				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Power meter	Agilent	E4419B	HKE-085	Dec. 27, 2019
Power Sensor	Agilent	E9300A	HKE-086	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.2.3. Test Data

Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Maximum Conducted Output Power (dBm)			FCC Limit (dBm)	Result
		Antenna port 1	Antenna port 2	MIMO		
11a	CH36	10.19	10.47	/	23.97	PASS
11a	CH40	10.23	9.52	/	23.97	PASS
11a	CH48	10.35	10.36	/	23.97	PASS
11n(HT20)	CH36	9.37	9.44	12.42	23.97	PASS
11n(HT20)	CH40	9.33	9.29	12.32	23.97	PASS
11n(HT20)	CH48	10.28	9.69	13.01	23.97	PASS
11n(HT40)	CH38	9.32	9.55	12.45	23.97	PASS
11n(HT40)	CH46	9.56	9.37	12.48	23.97	PASS
11ac(HT20)	CH36	10.37	9.56	12.99	23.97	PASS
11ac(HT20)	CH40	9.29	9.41	12.36	23.97	PASS
11ac(HT20)	CH48	9.15	8.16	11.69	23.97	PASS
11ac(HT40)	CH38	9.26	8.27	11.80	23.97	PASS
11ac(HT40)	CH46	9.11	8.53	11.84	23.97	PASS
11ac(HT80)	CH42	9.21	9.26	12.25	23.97	PASS

4.3. 6dB Emission Bandwidth

4.3.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	>500kHz
Test Setup:	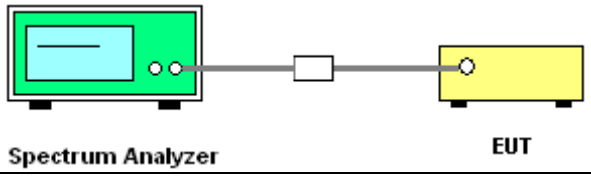
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

4.3.2. Test Instruments

RF Test Room				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.3.3. Test data

N/A

4.4. 26dB Bandwidth and 99% Occupied Bandwidth

4.4.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	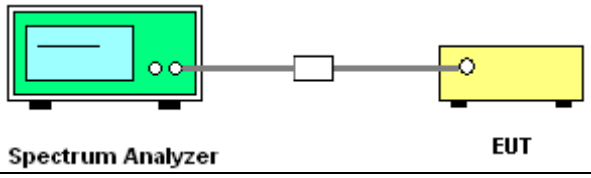
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth RBW = 1% EBW, VBW≥3RBW, In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	PASS

4.4.2. Test Instruments

RF Test Room				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.4.3. Test data

Band I
ANT 1

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Verdict
11a	CH36	5180	19.96	PASS
11a	CH40	5200	19.97	PASS
11a	CH48	5240	19.97	PASS
11n(HT20)	CH36	5180	21.06	PASS
11n(HT20)	CH40	5200	20.93	PASS
11n(HT20)	CH48	5240	20.76	PASS
11n(HT40)	CH38	5190	41.20	PASS
11n(HT40)	CH46	5230	41.49	PASS
11ac(HT20)	CH36	5180	20.89	PASS
11ac(HT20)	CH40	5200	20.94	PASS
11ac(HT20)	CH48	5240	20.83	PASS
11ac(HT40)	CH38	5190	41.42	PASS
11ac(HT40)	CH46	5230	41.25	PASS
11ac(HT80)	CH42	5210	81.10	PASS

Test plots as follows:

Band I （5150 – 5250 MHz）

802.11a

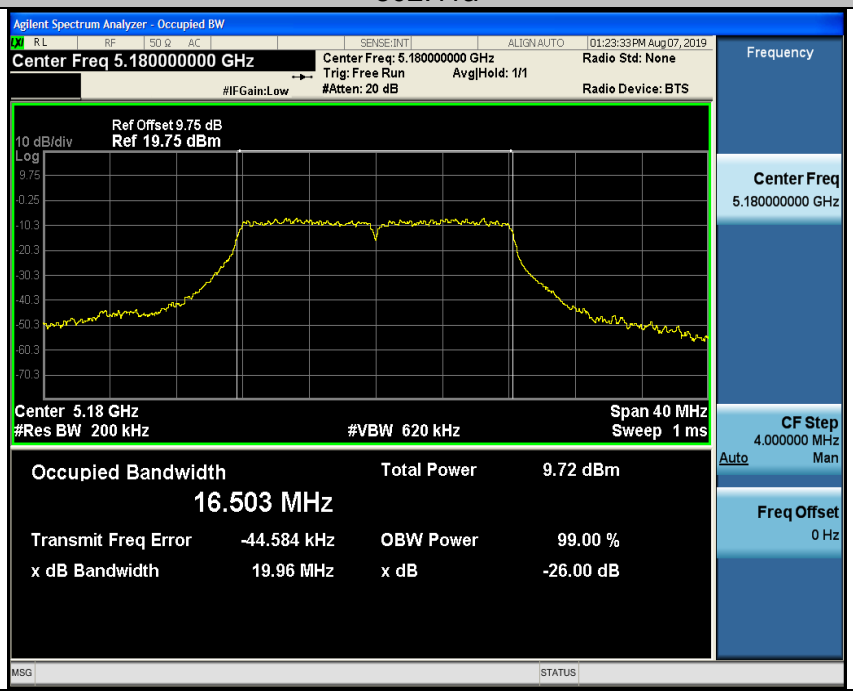

Low

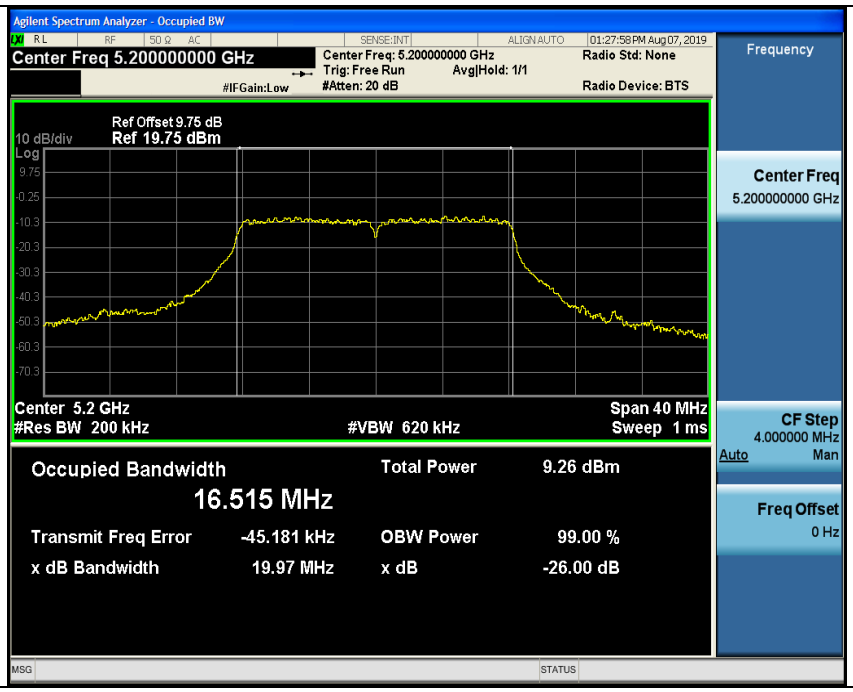

Mid

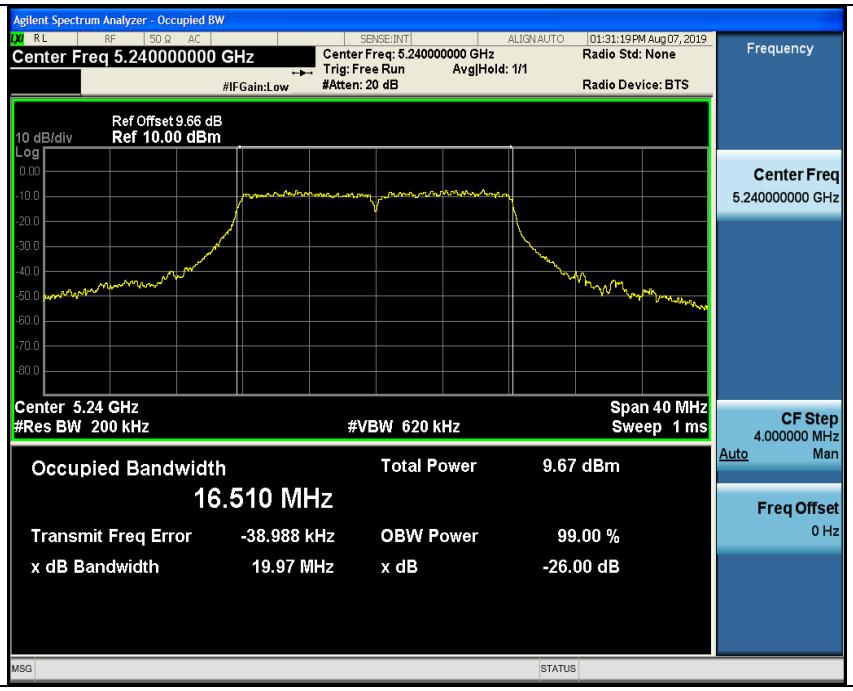

High

802.11n(HT20)

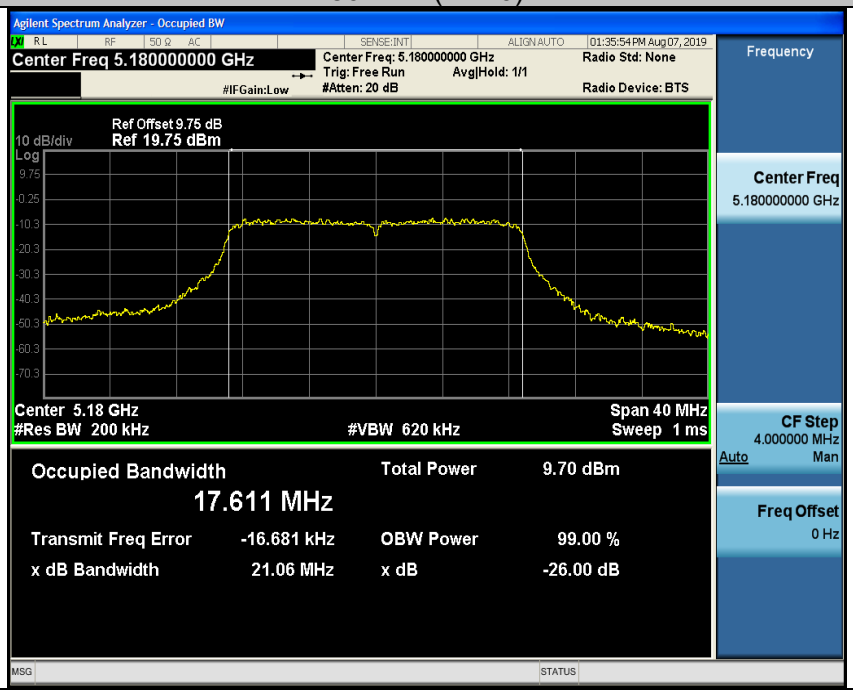

Low

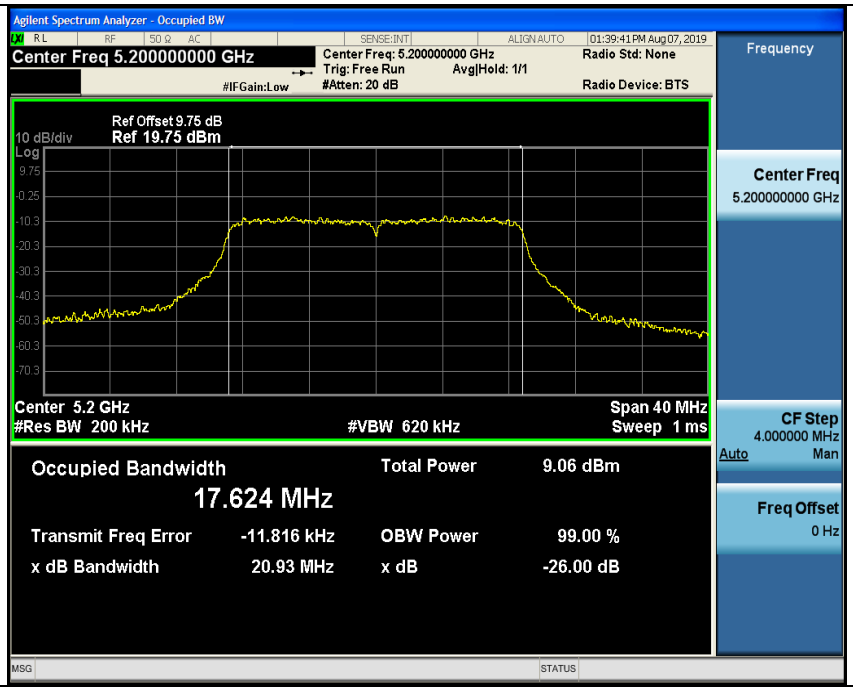
Agilent Spectrum Analyzer - Occupied BW
Center Freq 5.200000000 GHz
Center Freq: 5.200000000 GHz
Trig: Free Run
Avg|Hold: 1/1
#Atten: 20 dB
#IFGain:Low
Radio Std: None
Radio Device: BTS
01:39:41 PM Aug 07, 2019
Ref Offset 9.75 dB
10 dB/div
Ref 19.75 dBm
Center 5.2 GHz
#Res BW 200 kHz
#VBW 620 kHz
Span 40 MHz
Sweep 1 ms
Occupied Bandwidth
17.624 MHz
Total Power 9.06 dBm
Transmit Freq Error -11.816 kHz
OBW Power 99.00 %
x dB Bandwidth 20.93 MHz
x dB -26.00 dB
Frequency
Center Freq
5.200000000 GHz
CF Step
4.000000 MHz
Auto Man
Freq Offset
0 Hz

Mid

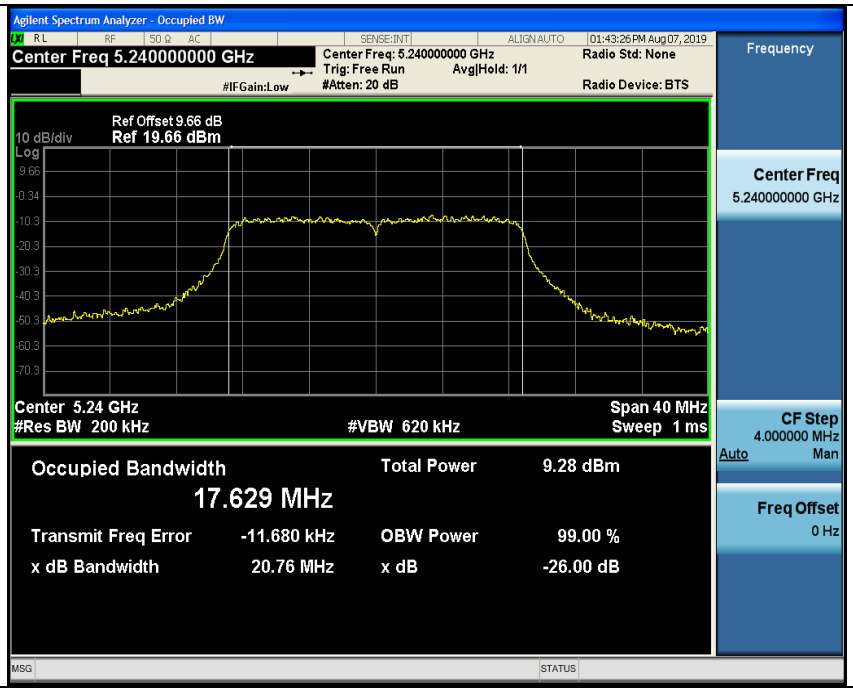
Agilent Spectrum Analyzer - Occupied BW
Center Freq 5.240000000 GHz
Center Freq: 5.240000000 GHz
Trig: Free Run
Avg|Hold: 1/1
#Atten: 20 dB
#IFGain:Low
Radio Std: None
Radio Device: BTS
01:43:26 PM Aug 07, 2019
Ref Offset 9.66 dB
10 dB/div
Ref 19.66 dBm
Center 5.24 GHz
#Res BW 200 kHz
#VBW 620 kHz
Span 40 MHz
Sweep 1 ms
Occupied Bandwidth
17.629 MHz
Total Power 9.28 dBm
Transmit Freq Error -11.680 kHz
OBW Power 99.00 %
x dB Bandwidth 20.76 MHz
x dB -26.00 dB
Frequency
Center Freq
5.240000000 GHz
CF Step
4.000000 MHz
Auto Man
Freq Offset
0 Hz

High

802.11n(HT40)

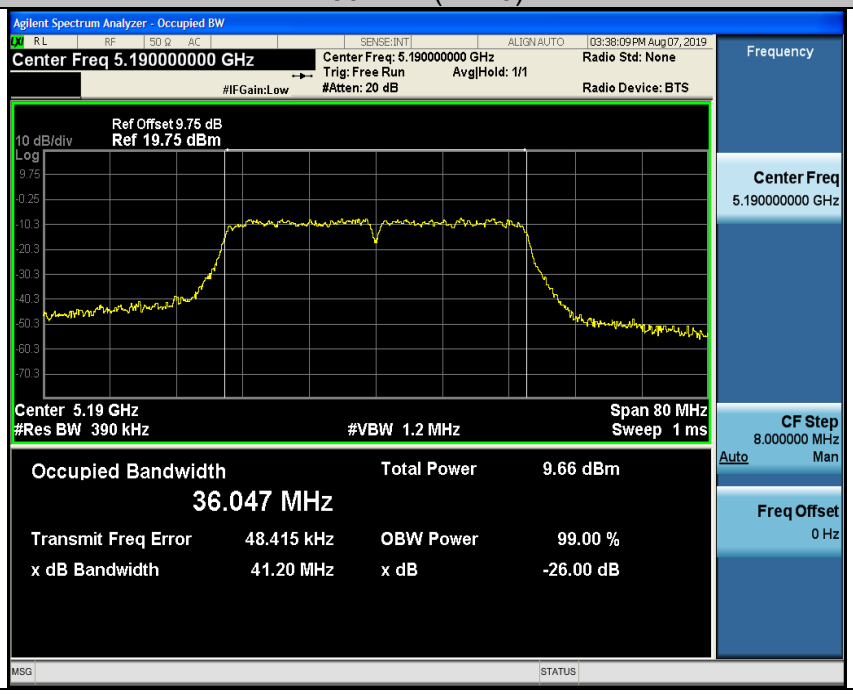

Low

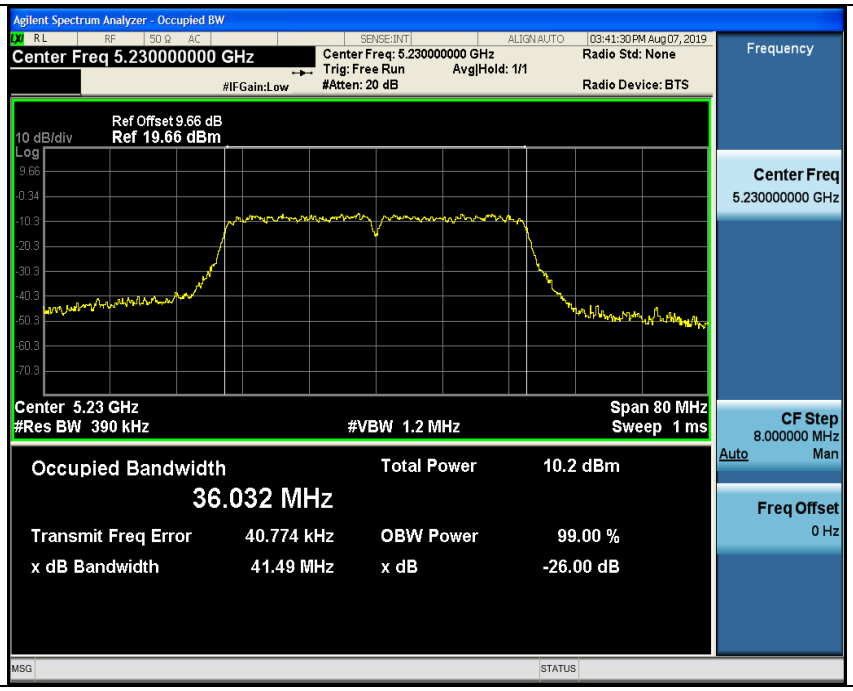

High

802.11ac(HT20)

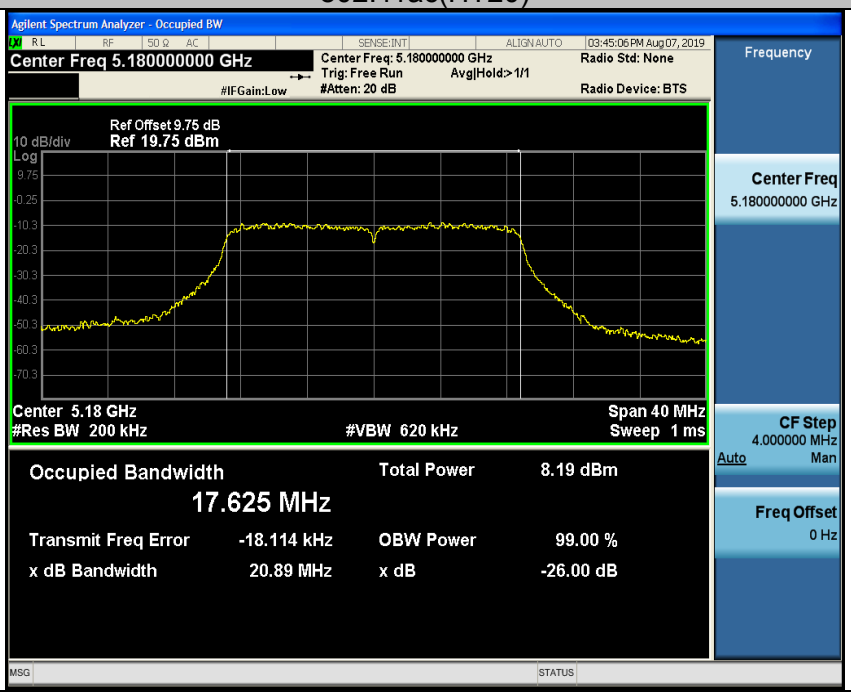

Low

Mid

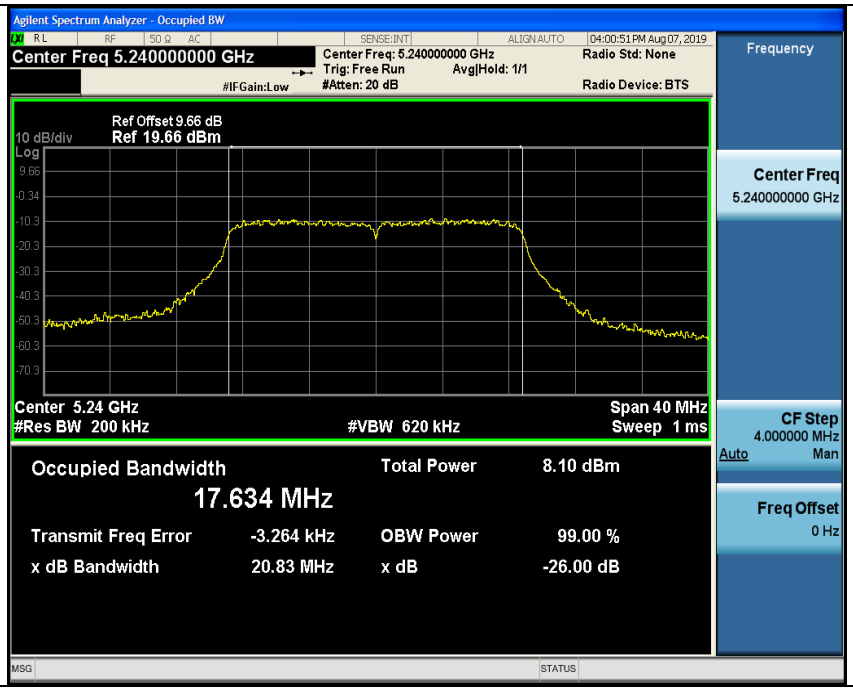

High

802.11ac(HT40)

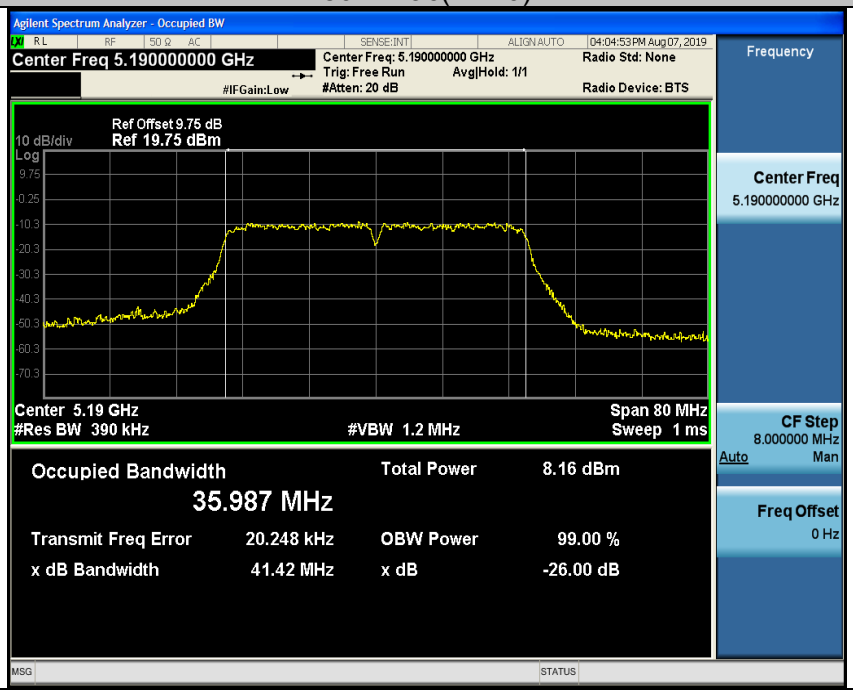

Low

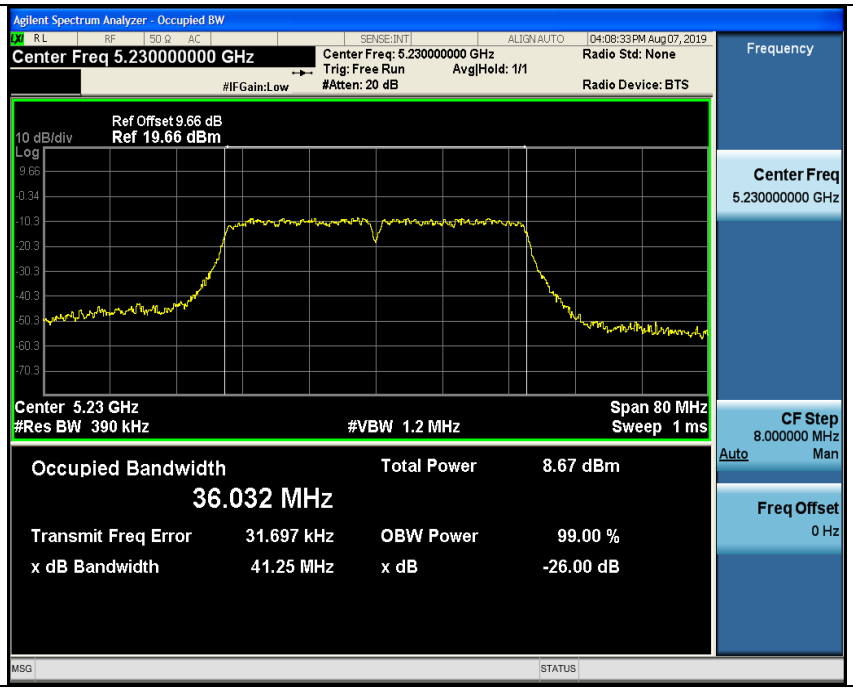

High

802.11ac(HT80)

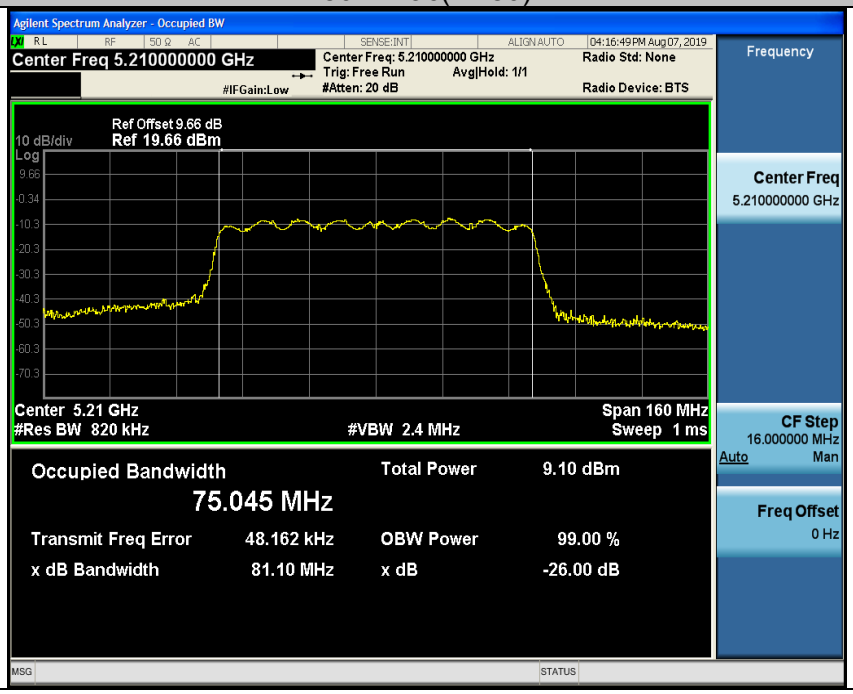

ANT 2

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Verdict
11a	CH36	5180	19.97	PASS
11a	CH40	5200	20.18	PASS
11a	CH48	5240	20.07	PASS
11n(HT20)	CH36	5180	20.93	PASS
11n(HT20)	CH40	5200	20.93	PASS
11n(HT20)	CH48	5240	20.93	PASS
11n(HT40)	CH38	5190	41.38	PASS
11n(HT40)	CH46	5230	41.61	PASS
11ac(HT20)	CH36	5180	20.98	PASS
11ac(HT20)	CH40	5200	20.96	PASS
11ac(HT20)	CH48	5240	20.98	PASS
11ac(HT40)	CH38	5190	41.57	PASS
11ac(HT40)	CH46	5230	41.41	PASS
11ac(HT80)	CH42	5210	81.17	PASS

Test plots as follows:

Band I （5150 – 5250 MHz）

802.11a

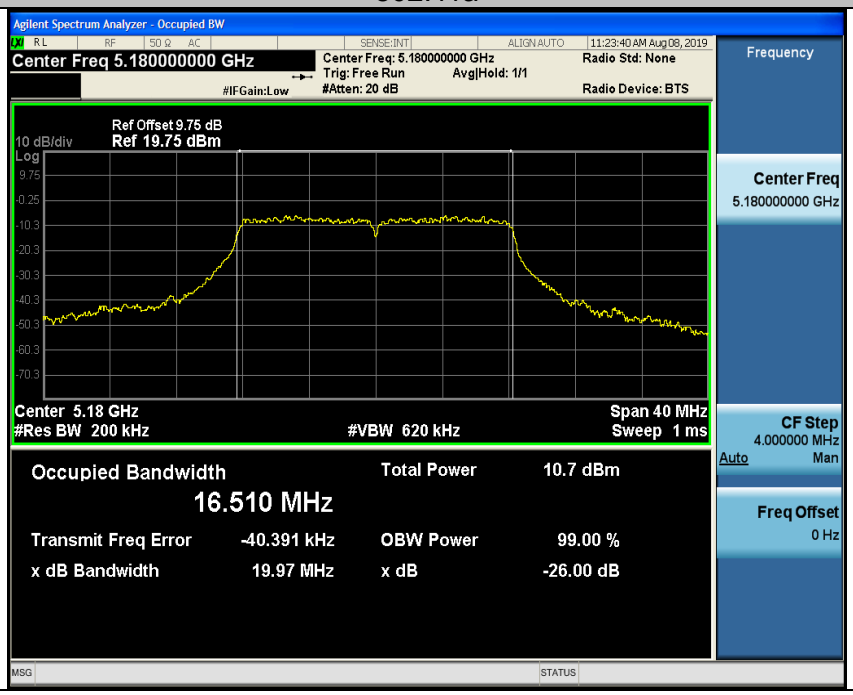

Low

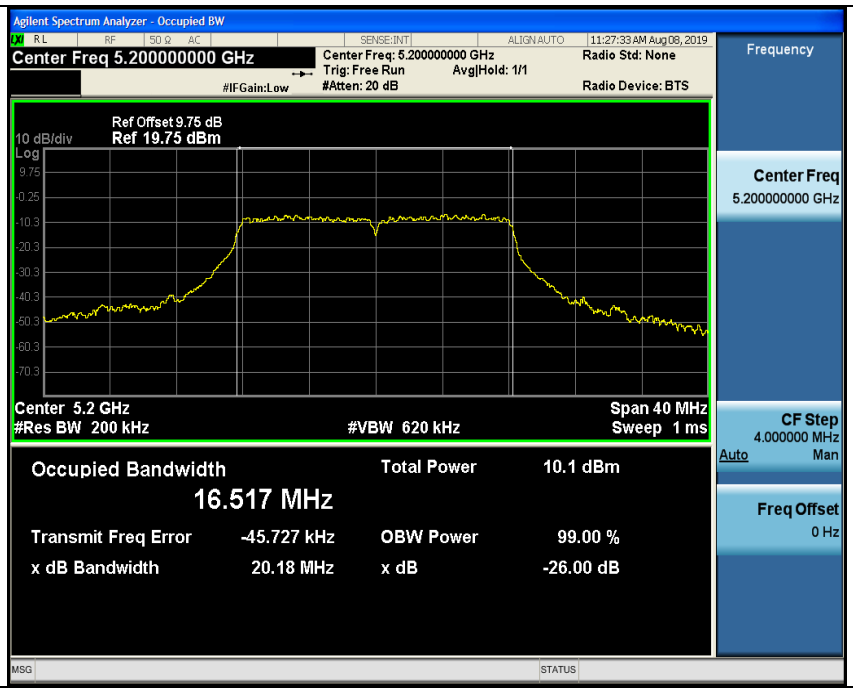

Mid

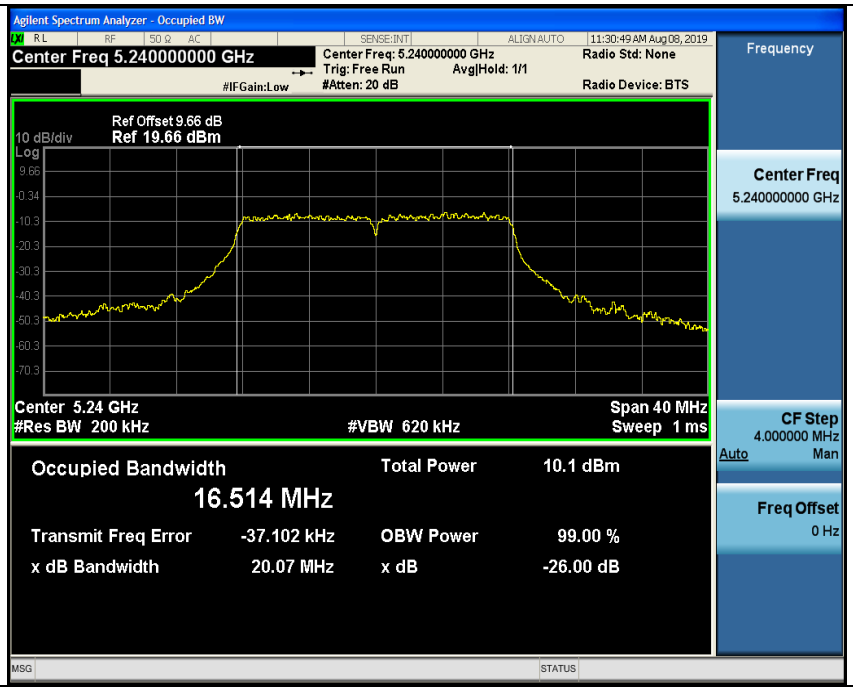

High

802.11n(HT20)

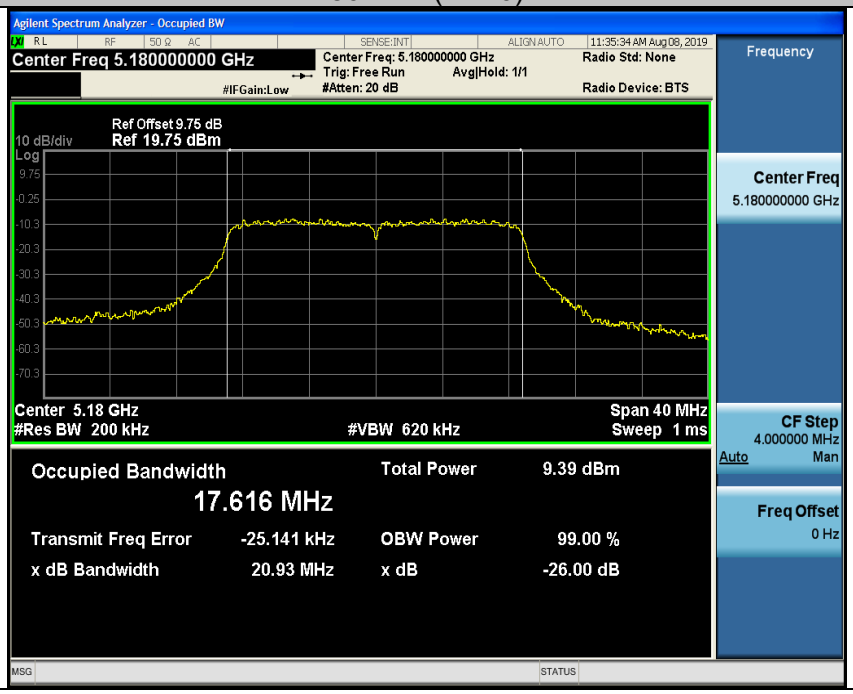

Low

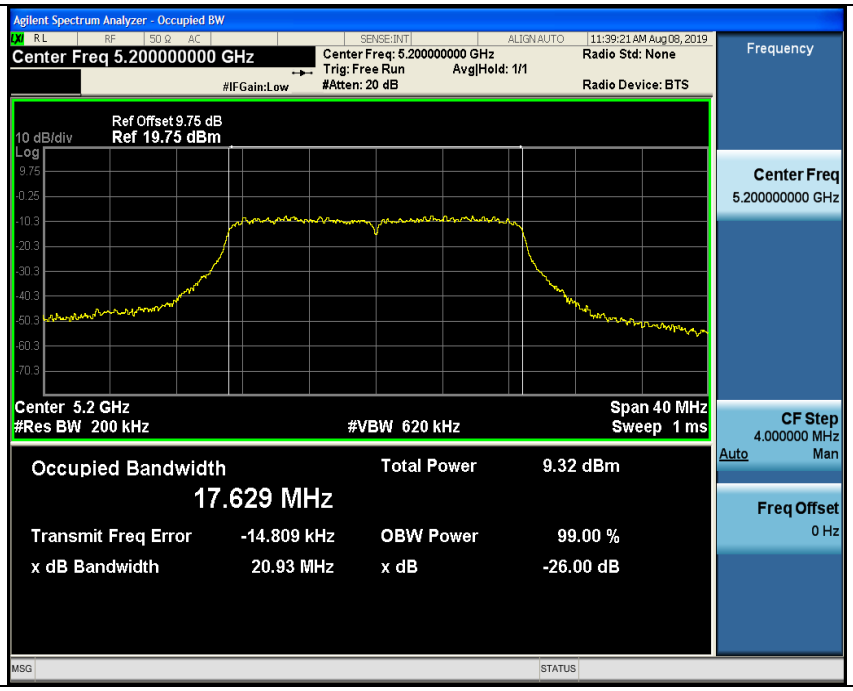
Agilent Spectrum Analyzer - Occupied BW
Center Freq 5.200000000 GHz
Center Freq: 5.200000000 GHz
Trig: Free Run
Avg|Hold: 1/1
#Atten: 20 dB
Radio Std: None
Radio Device: BTS
11:39:21 AM Aug 08, 2019
Frequency
Ref Offset 9.75 dB
10 dB/div
Ref 19.75 dBm
Center Freq
5.200000000 GHz
Center 5.2 GHz
#Res BW 200 kHz
#VBW 620 kHz
Span 40 MHz
Sweep 1 ms
CF Step
4.000000 MHz
Auto
Man
Occupied Bandwidth
17.629 MHz
Total Power
9.32 dBm
Transmit Freq Error
-14.809 kHz
OBW Power
99.00 %
x dB Bandwidth
20.93 MHz
x dB
-26.00 dB
Freq Offset
0 Hz

Mid

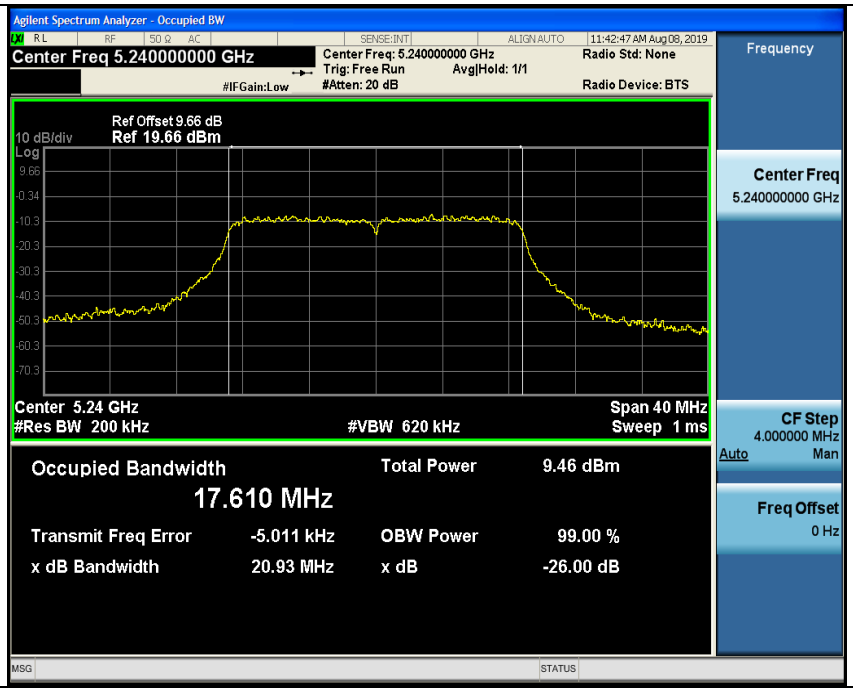
Agilent Spectrum Analyzer - Occupied BW
Center Freq 5.240000000 GHz
Center Freq: 5.240000000 GHz
Trig: Free Run
Avg|Hold: 1/1
#Atten: 20 dB
Radio Std: None
Radio Device: BTS
11:42:47 AM Aug 08, 2019
Frequency
Ref Offset 9.66 dB
10 dB/div
Ref 19.66 dBm
Center Freq
5.240000000 GHz
Center 5.24 GHz
#Res BW 200 kHz
#VBW 620 kHz
Span 40 MHz
Sweep 1 ms
CF Step
4.000000 MHz
Auto
Man
Occupied Bandwidth
17.610 MHz
Total Power
9.46 dBm
Transmit Freq Error
-5.011 kHz
OBW Power
99.00 %
x dB Bandwidth
20.93 MHz
x dB
-26.00 dB
Freq Offset
0 Hz

High

802.11n(HT40)

Low

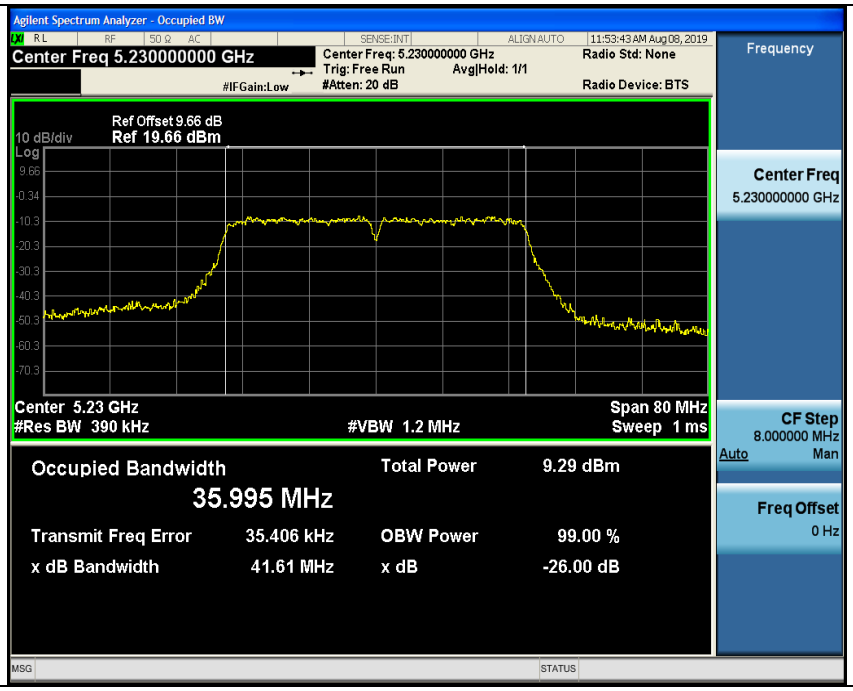

High

802.11ac(HT20)

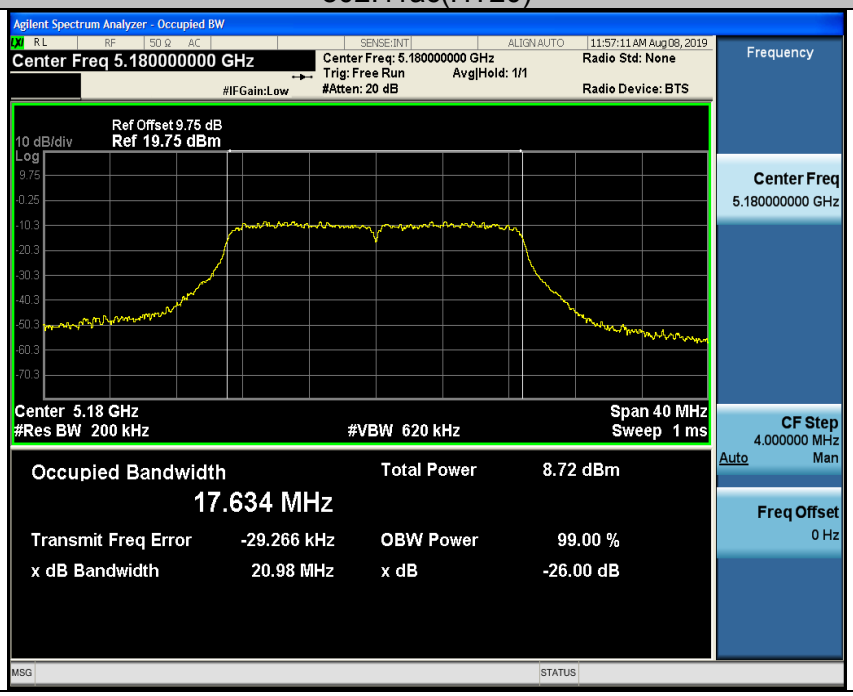

Low

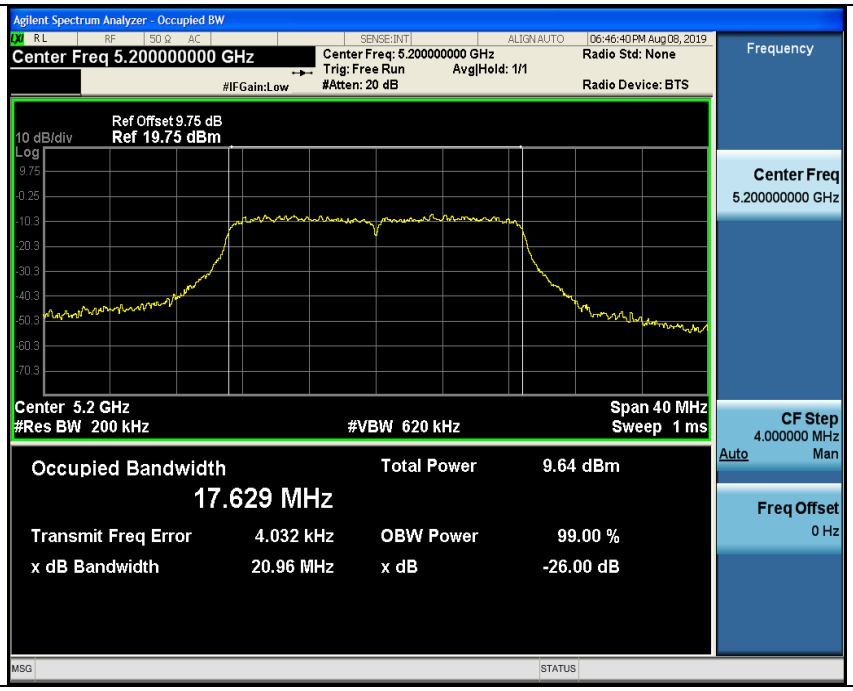

Mid

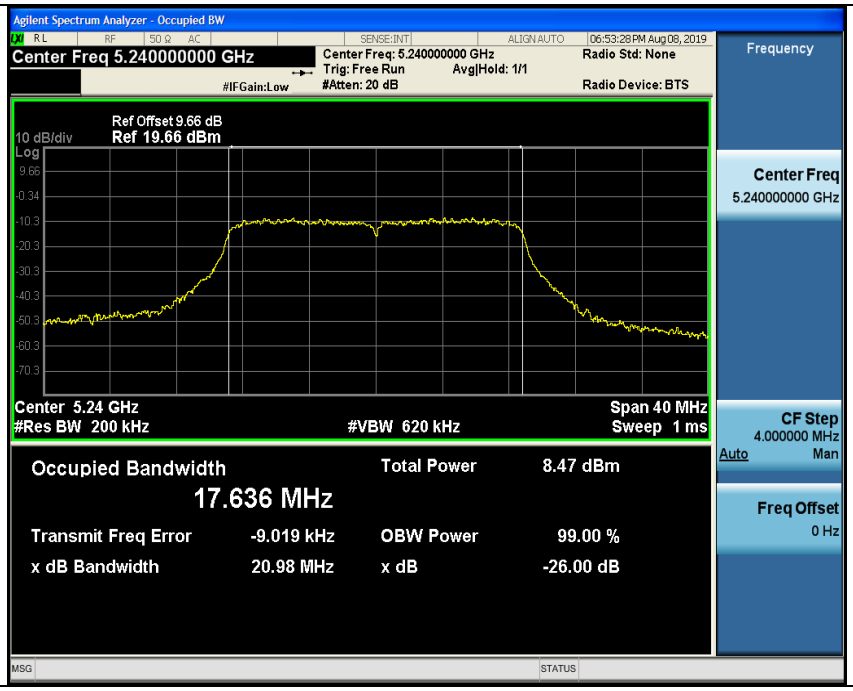

High

802.11ac(HT40)

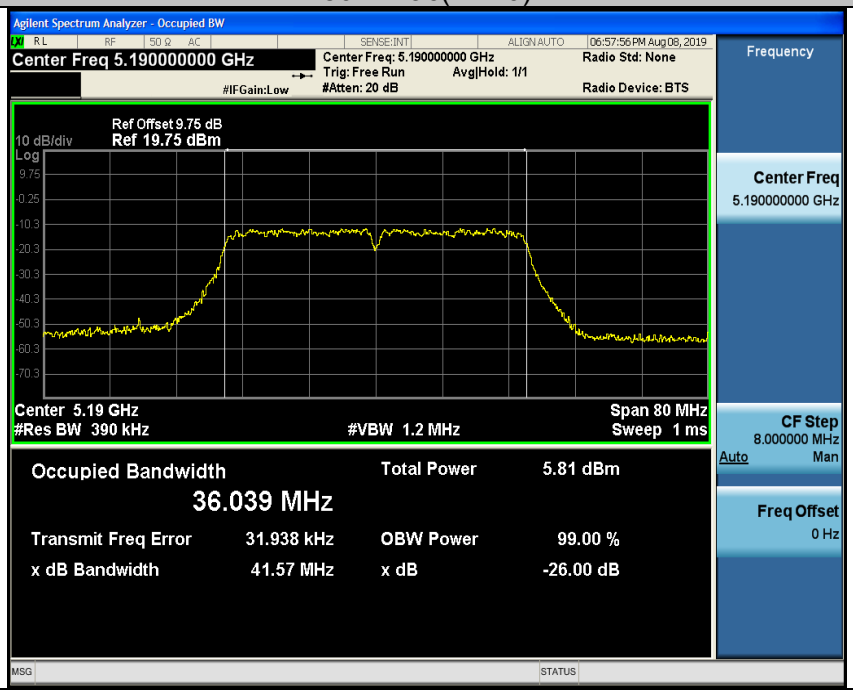

Low

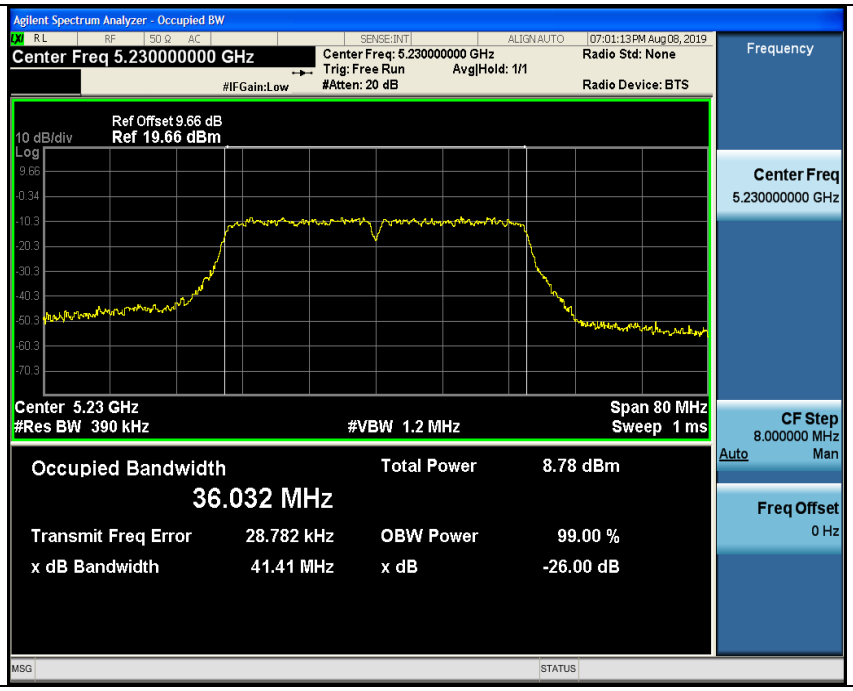

High

802.11ac(HT80)

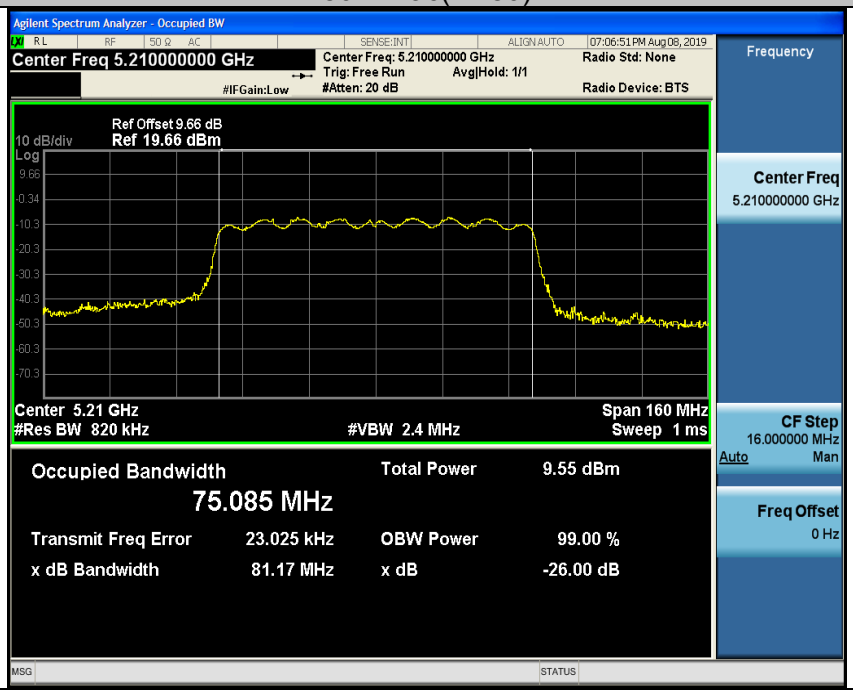

4.5. Power Spectral Density

4.5.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
Limit:	≤11.00dBm/MHz for Band I 5150MHz-5250MHz ≤30.00dBm/500KHz for Band IV 5725MHz-5850MHz The e.i,r,p spectral density for Band I 5150MHz – 5250 MHz should not exceed 10dBm/MHz
Test Setup:	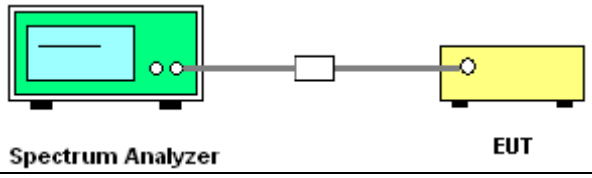
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW ≥ 3*RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

4.5.2. Test Instruments

RF Test Room				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.5.3. Test data

ANT 1

Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	Power Spectral Density	Limit (dBm/MHz)	Result
11a	CH36	-3.20	0	-3.20	11	PASS
11a	CH40	-3.72	0	-3.72	11	PASS
11a	CH48	-3.21	0	-3.21	11	PASS
11n(HT20)	CH36	-2.68	0	-2.68	11	PASS
11n(HT20)	CH40	-3.49	0	-3.49	11	PASS
11n(HT20)	CH48	-3.22	0	-3.22	11	PASS
11n(HT40)	CH38	-6.33	0	-6.33	11	PASS
11n(HT40)	CH46	-5.68	0	-5.68	11	PASS
11ac(HT20)	CH36	-3.99	0	-3.99	11	PASS
11ac(HT20)	CH40	-3.47	0	-3.47	11	PASS
11ac(HT20)	CH48	-4.18	0	-4.18	11	PASS
11ac(HT40)	CH38	-7.85	0	-7.85	11	PASS
11ac(HT40)	CH46	-7.17	0	-7.17	11	PASS
11ac(HT80)	CH42	-9.58	0	-9.58	11	PASS

Test plots as follows:

Band I （5150 – 5250 MHz）

802.11a

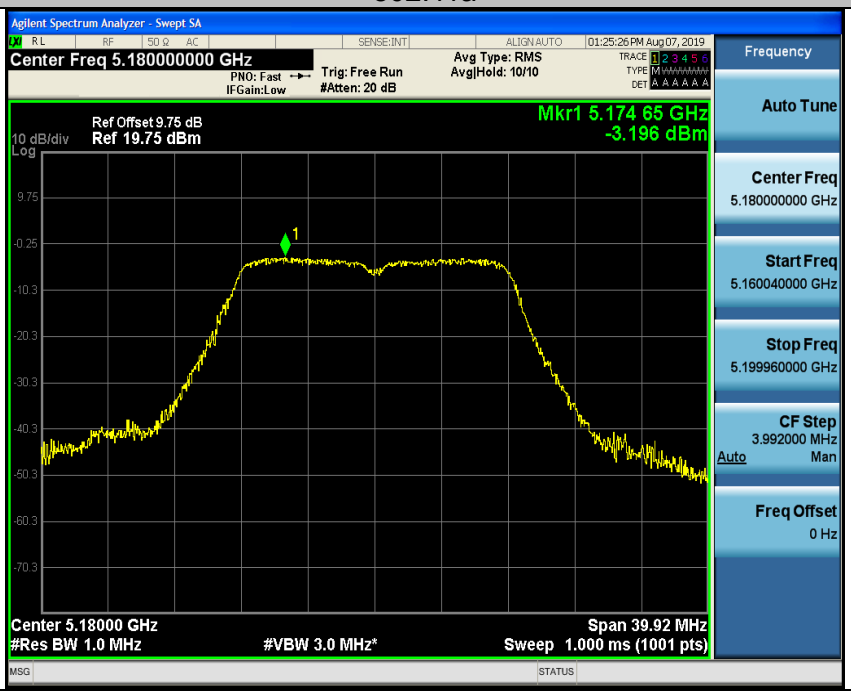

Low

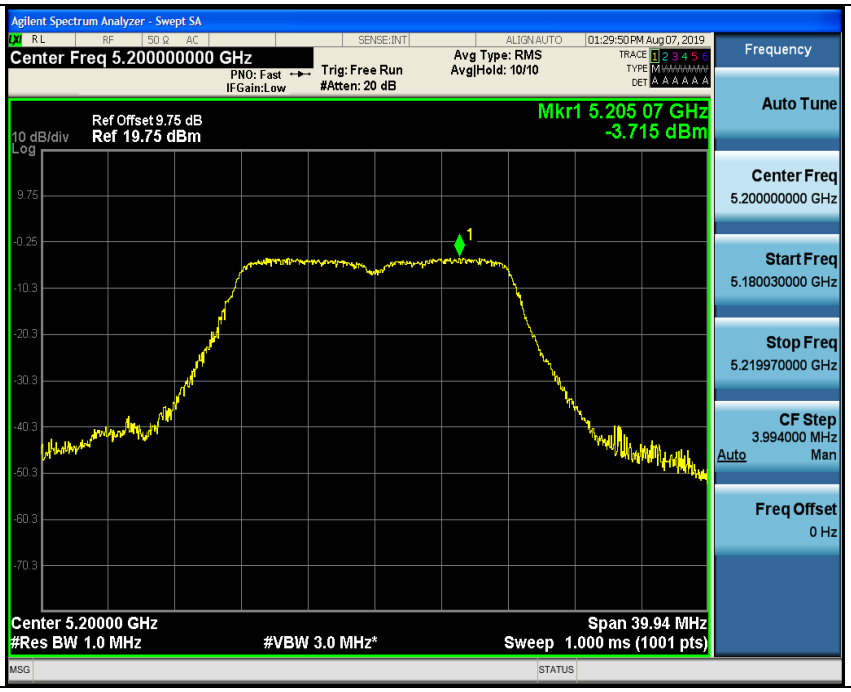

Mid

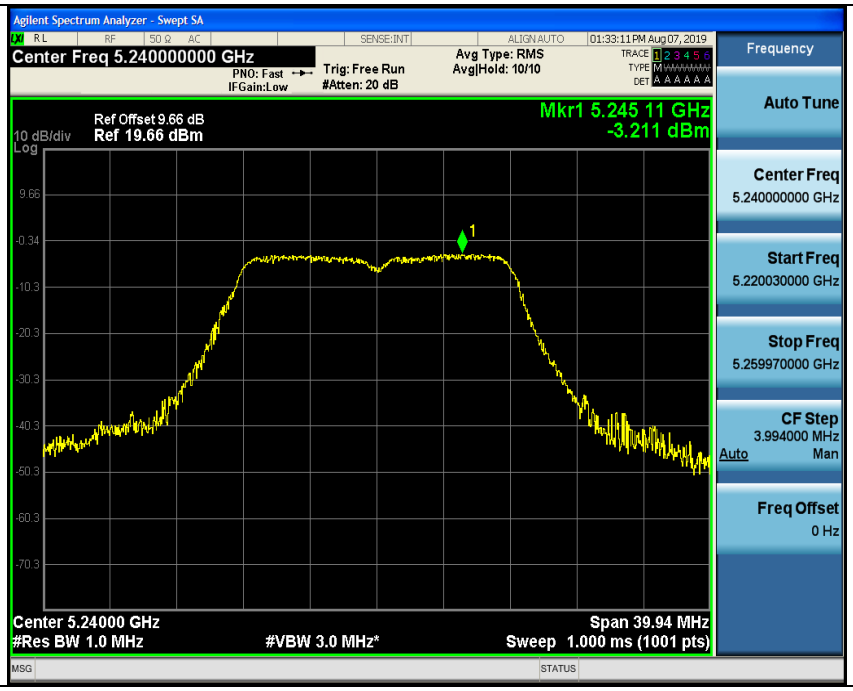

High

802.11n(HT20)

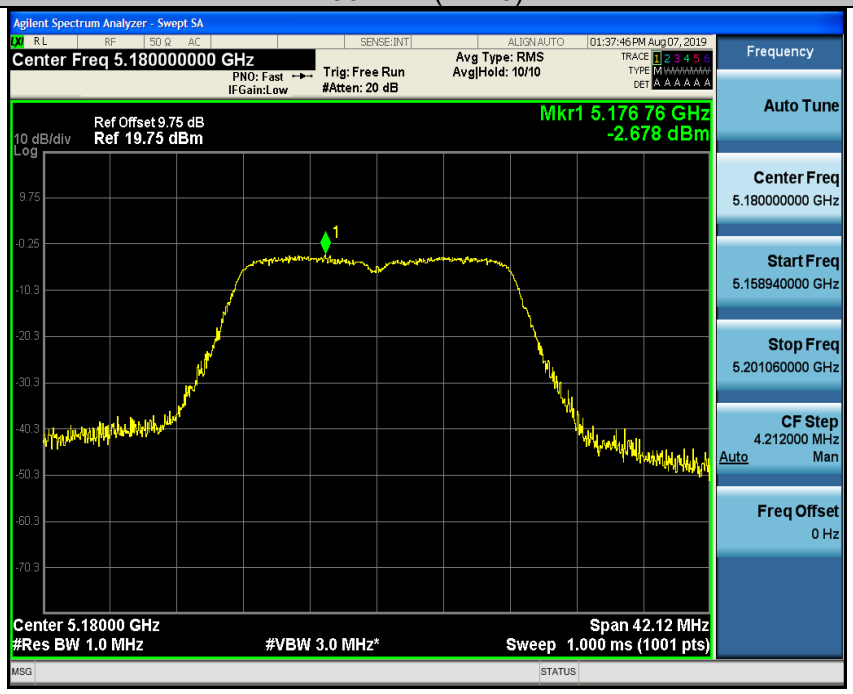

Low

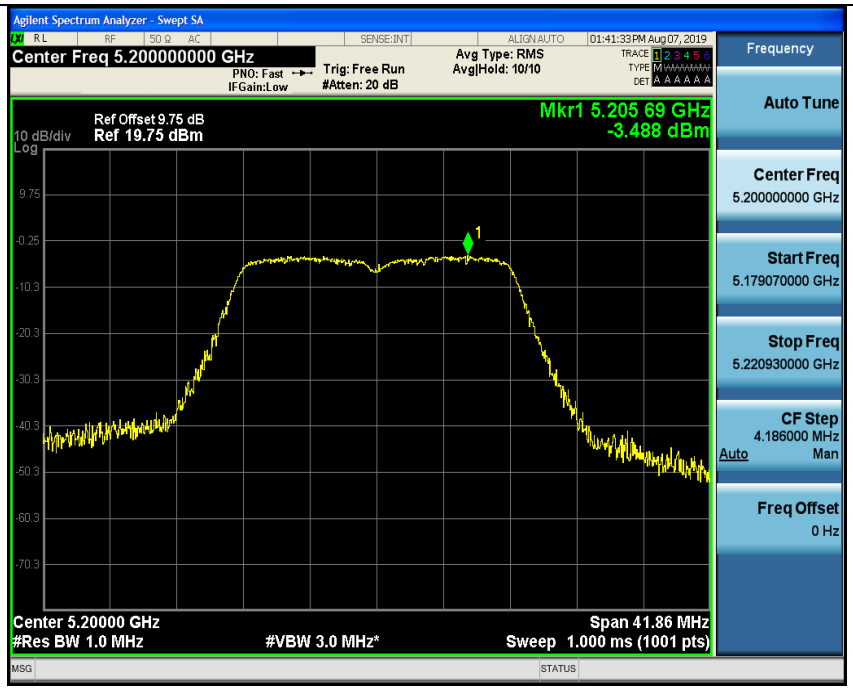
Agilent Spectrum Analyzer - Swept SA
Center Freq 5.200000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: RMS
Avg|Hold: 10/10
01:41:33 PM Aug 07, 2019
Ref Offset 9.75 dB
10 dB/div
Ref 19.75 dBm
Mkr1 5.205 69 GHz
-3.488 dBm
Center 5.20000 GHz
#Res BW 1.0 MHz
#VBW 3.0 MHz*
Span 41.86 MHz
Sweep 1.000 ms (1001 pts)
Frequency
Auto Tune
Center Freq
5.200000000 GHz
Start Freq
5.179070000 GHz
Stop Freq
5.220930000 GHz
CF Step
4.186000 MHz
Auto
Man
Freq Offset
0 Hz

Mid

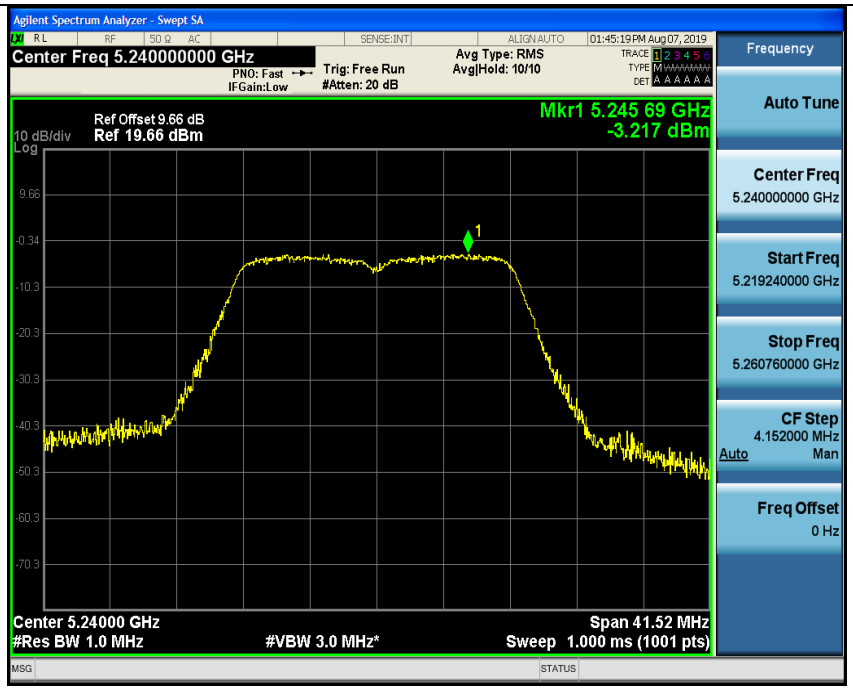
Agilent Spectrum Analyzer - Swept SA
Center Freq 5.240000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: RMS
Avg|Hold: 10/10
01:45:19 PM Aug 07, 2019
Ref Offset 9.66 dB
10 dB/div
Ref 19.66 dBm
Mkr1 5.245 69 GHz
-3.217 dBm
Center 5.24000 GHz
#Res BW 1.0 MHz
#VBW 3.0 MHz*
Span 41.52 MHz
Sweep 1.000 ms (1001 pts)
Frequency
Auto Tune
Center Freq
5.240000000 GHz
Start Freq
5.219240000 GHz
Stop Freq
5.260760000 GHz
CF Step
4.152000 MHz
Auto
Man
Freq Offset
0 Hz

High

802.11n(HT40)
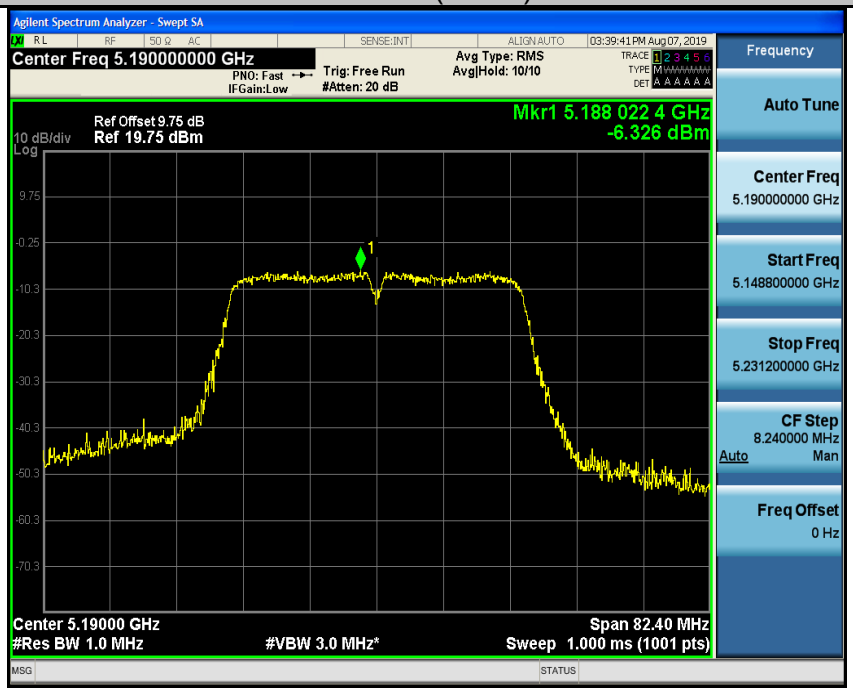 Low
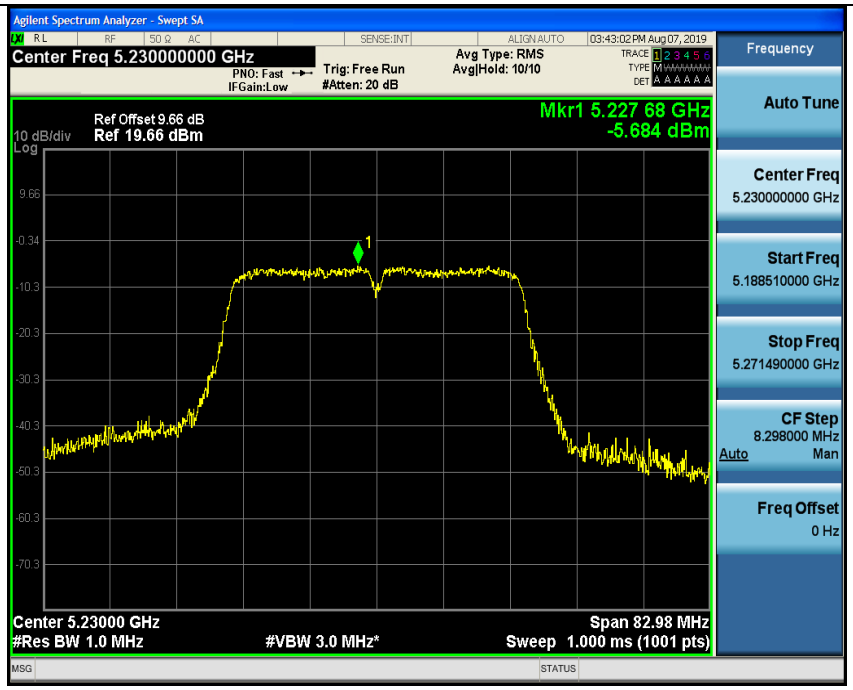 High

802.11ac(HT20)

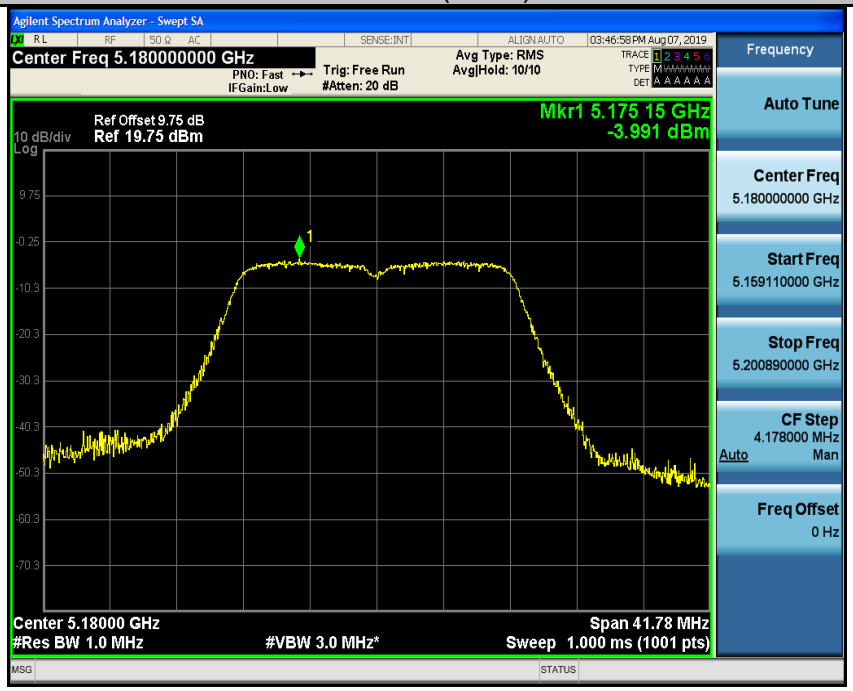

Low

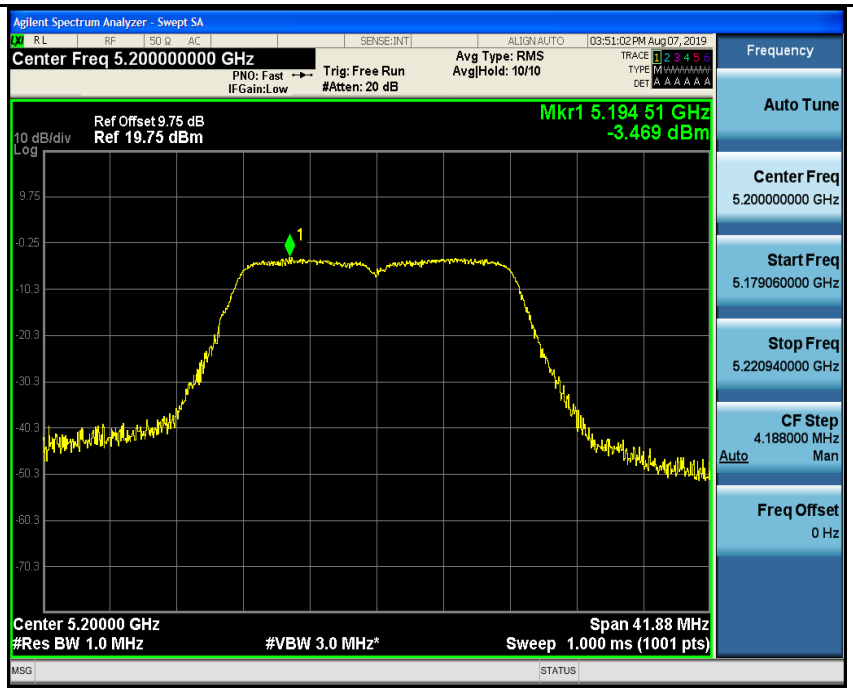

Mid

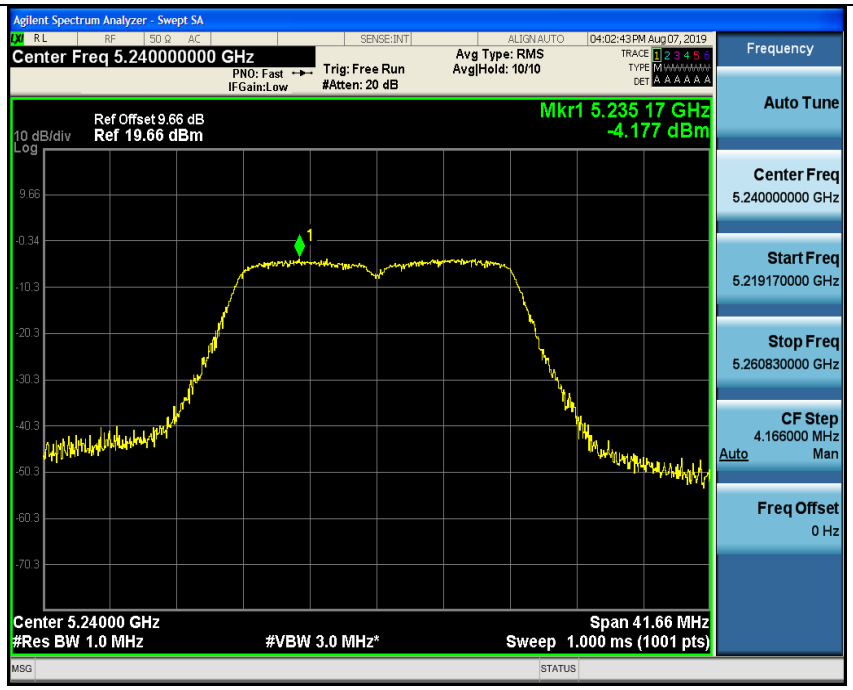

High

802.11ac(HT40)

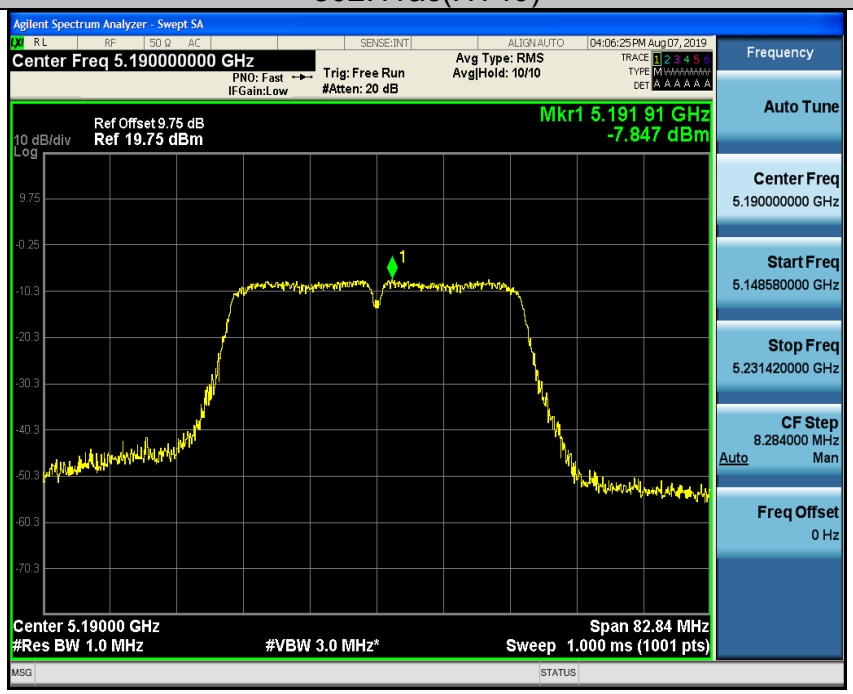

Low

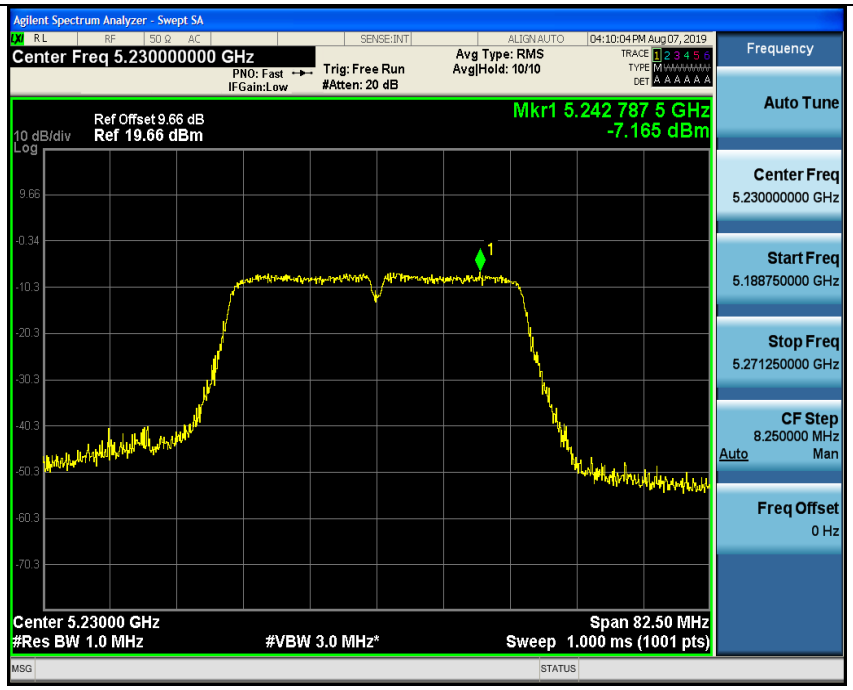

High

802.11ac(HT80)

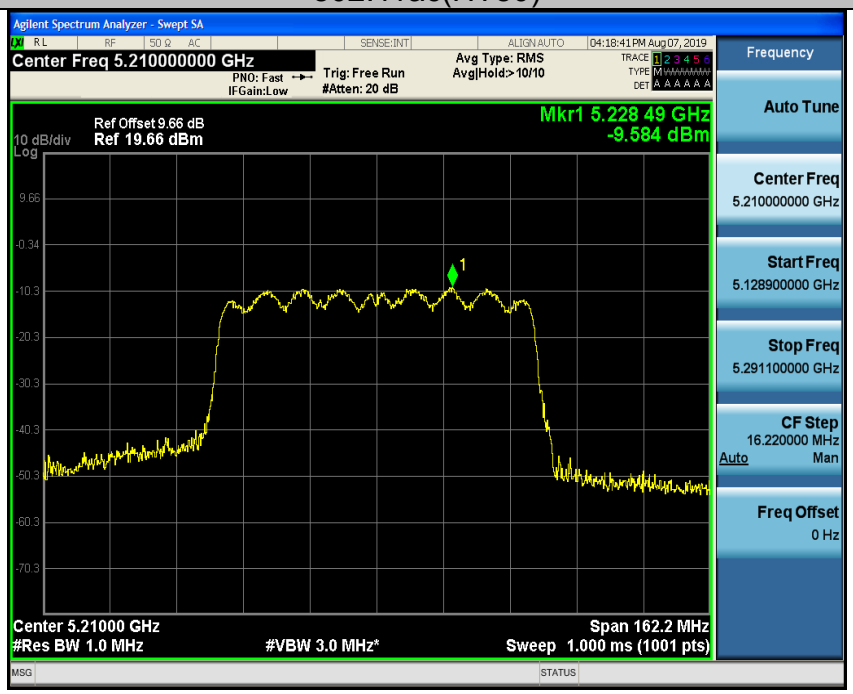

Low

ANT 2

Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	Power Spectral Density	Limit (dBm/MHz)	Result
11a	CH36	-2.19	0	-2.19	11	PASS
11a	CH40	-2.72	0	-2.72	11	PASS
11a	CH48	-2.47	0	-2.47	11	PASS
11n(HT20)	CH36	-2.82	0	-2.82	11	PASS
11n(HT20)	CH40	-3.32	0	-3.32	11	PASS
11n(HT20)	CH48	-3.09	0	-3.09	11	PASS
11n(HT40)	CH38	-6.02	0	-6.02	11	PASS
11n(HT40)	CH46	-6.86	0	-6.86	11	PASS
11ac(HT20)	CH36	-3.72	0	-3.72	11	PASS
11ac(HT20)	CH40	-3.26	0	-3.26	11	PASS
11ac(HT20)	CH48	-4.19	0	-4.19	11	PASS
11ac(HT40)	CH38	-10.08	0	-10.08	11	PASS
11ac(HT40)	CH46	-7.15	0	-7.15	11	PASS
11ac(HT80)	CH42	-8.74	0	-8.74	11	PASS

Test plots as follows:
Band I （5150 – 5250 MHz）

802.11a

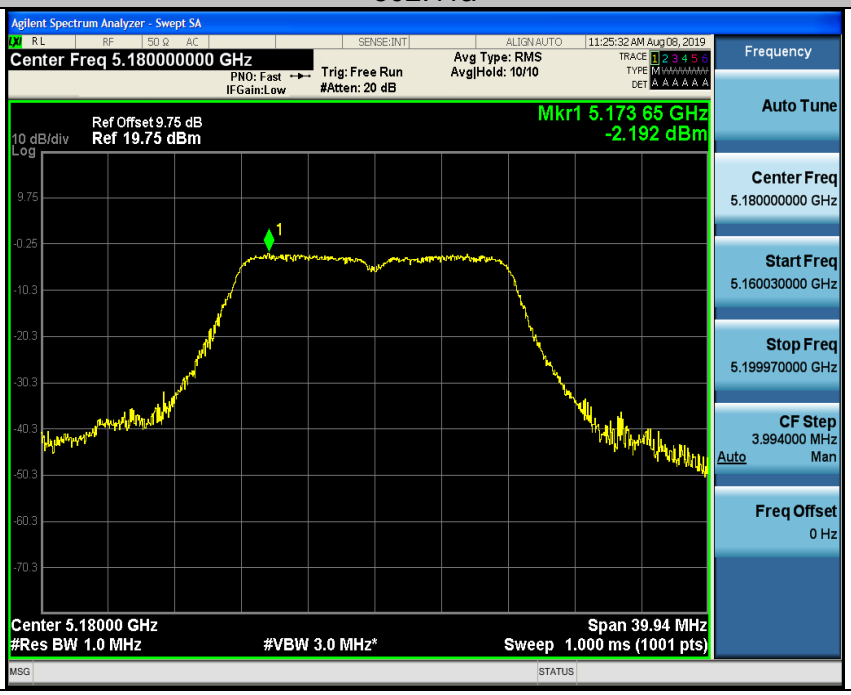

Low

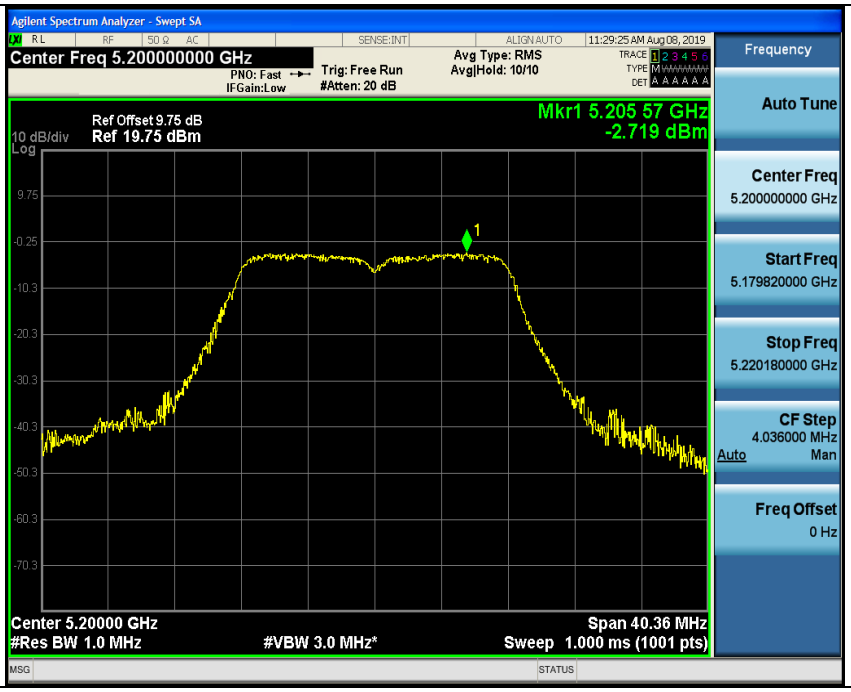

Mid

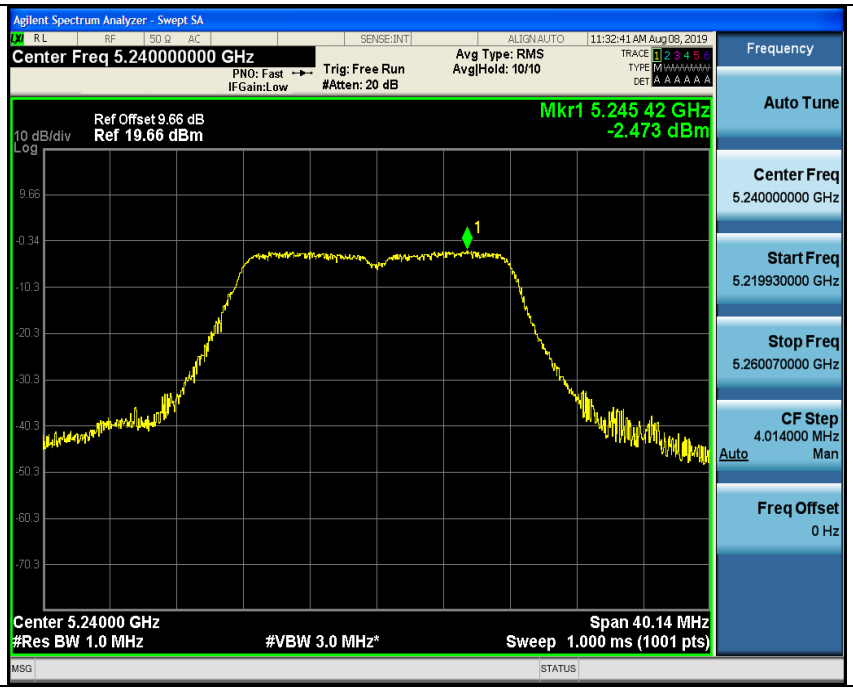

High

802.11n(HT20)

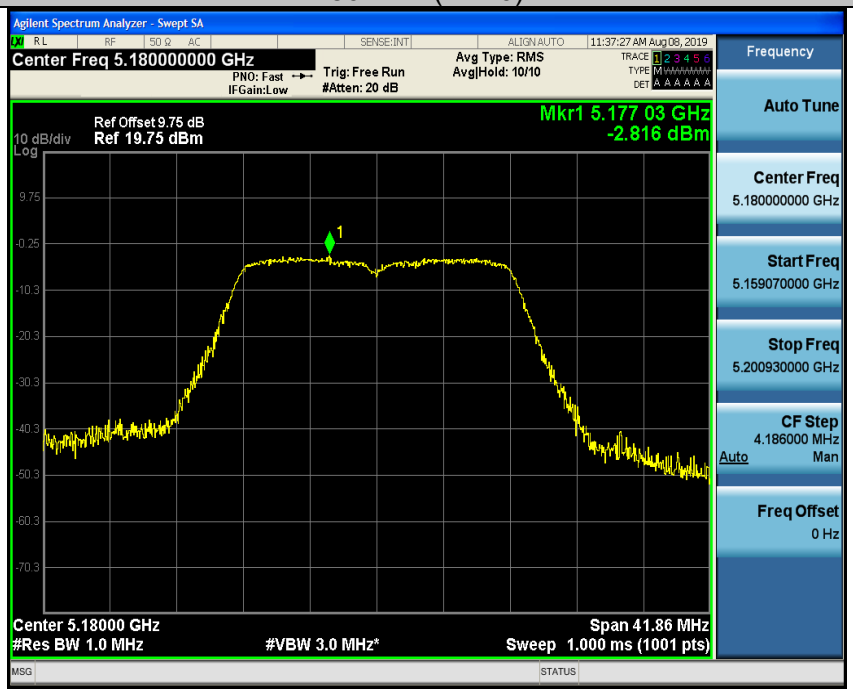

Low

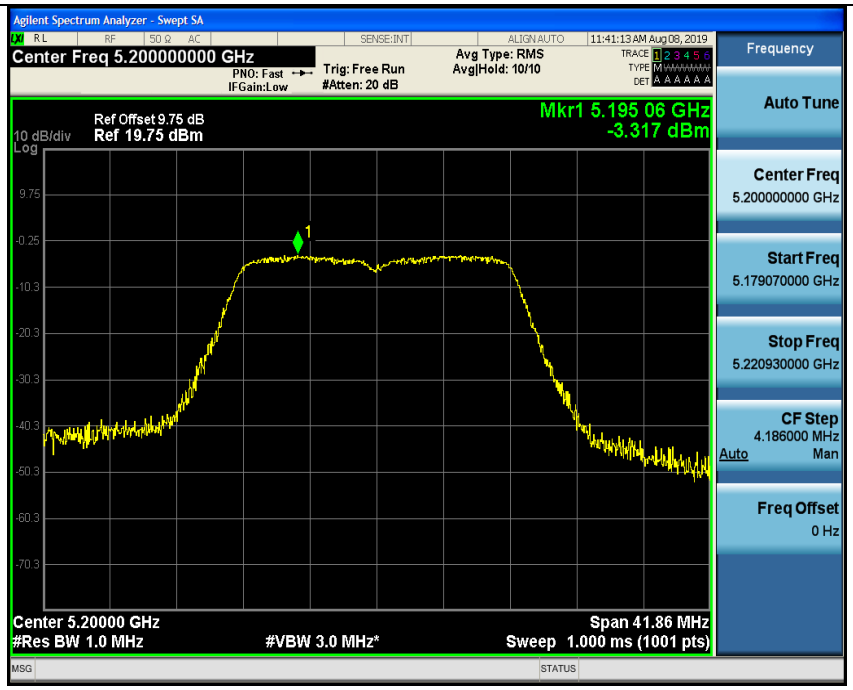
Agilent Spectrum Analyzer - Swept SA
Center Freq 5.200000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: RMS
Avg|Hold: 10/10
11:41:13 AM Aug 08, 2019
Ref Offset 9.75 dB
10 dB/div
Ref 19.75 dBm
Mkr1 5.195 06 GHz
-3.317 dBm
Center 5.20000 GHz
#Res BW 1.0 MHz
#VBW 3.0 MHz*
Span 41.86 MHz
Sweep 1.000 ms (1001 pts)
Frequency
Auto Tune
Center Freq
5.200000000 GHz
Start Freq
5.179070000 GHz
Stop Freq
5.220930000 GHz
CF Step
4.186000 MHz
Auto
Man
Freq Offset
0 Hz

Mid

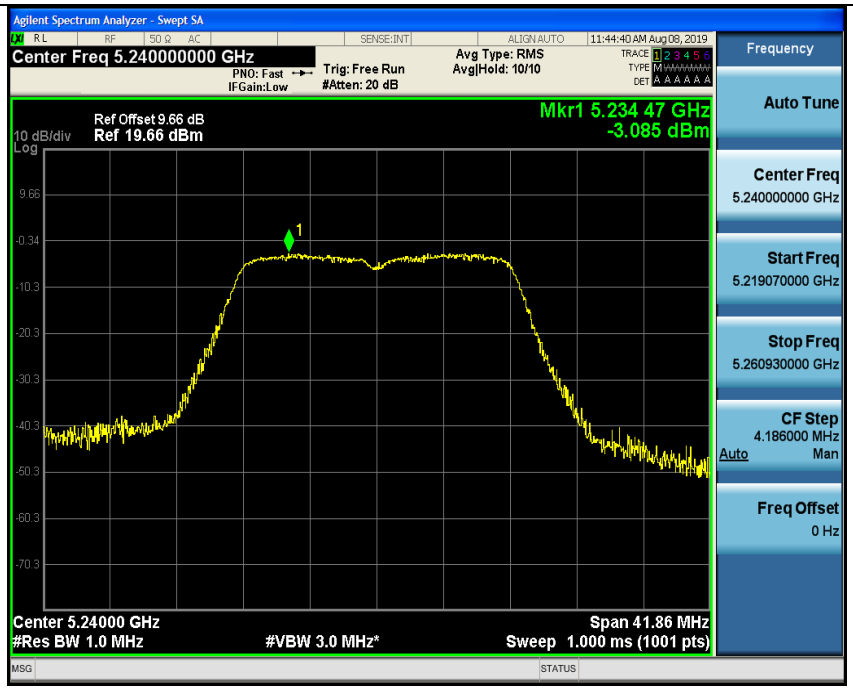
Agilent Spectrum Analyzer - Swept SA
Center Freq 5.240000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: RMS
Avg|Hold: 10/10
11:44:40 AM Aug 08, 2019
Ref Offset 9.66 dB
10 dB/div
Ref 19.66 dBm
Mkr1 5.234 47 GHz
-3.085 dBm
Center 5.24000 GHz
#Res BW 1.0 MHz
#VBW 3.0 MHz*
Span 41.86 MHz
Sweep 1.000 ms (1001 pts)
Frequency
Auto Tune
Center Freq
5.240000000 GHz
Start Freq
5.219070000 GHz
Stop Freq
5.260930000 GHz
CF Step
4.186000 MHz
Auto
Man
Freq Offset
0 Hz

High

802.11n(HT40)
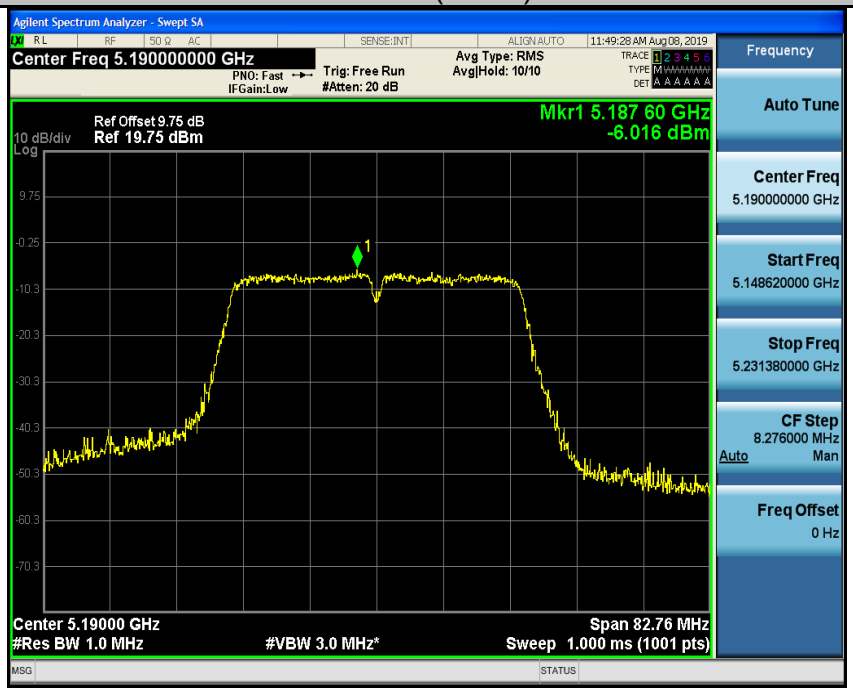
Low
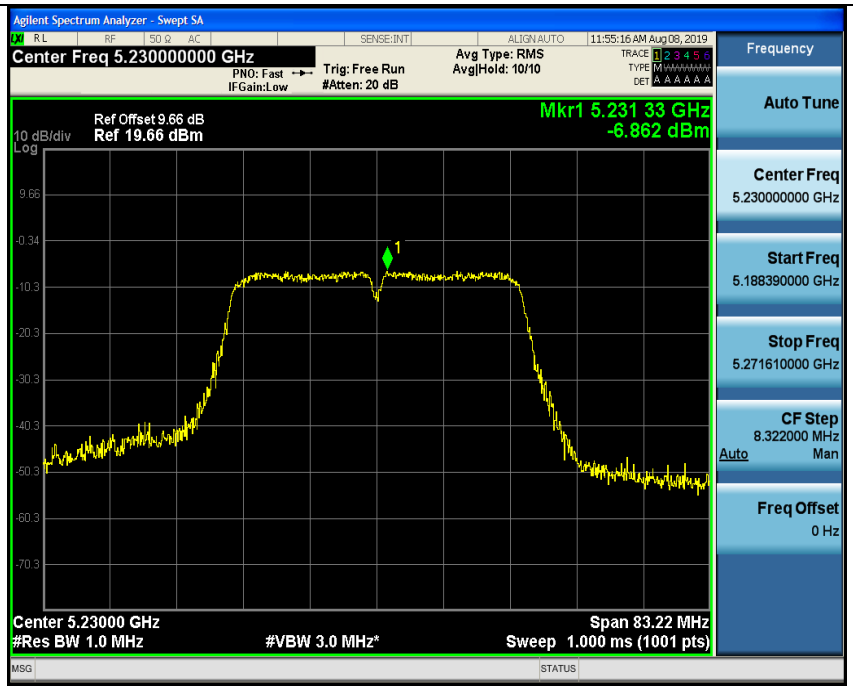
High

802.11ac(HT20)

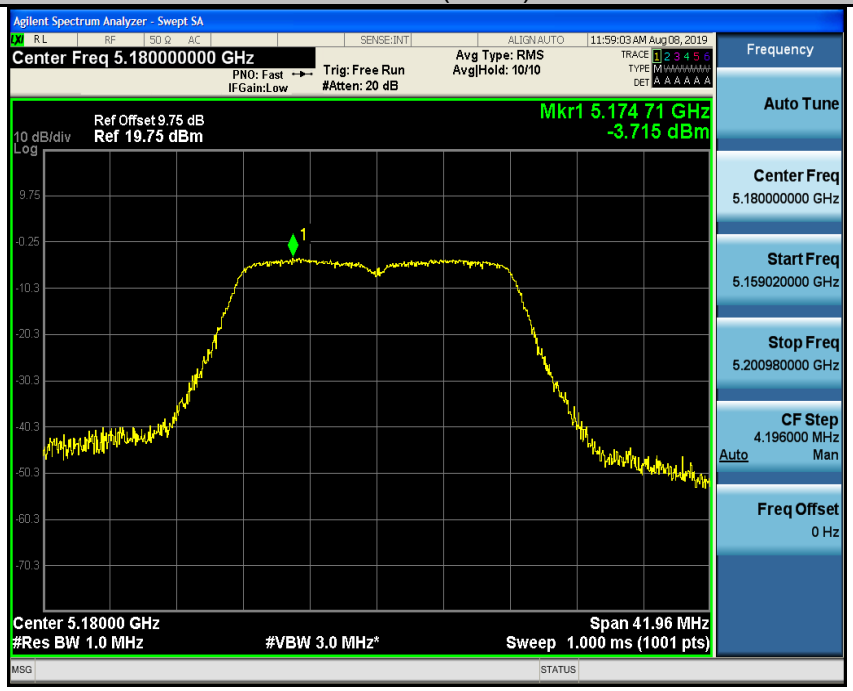

Low

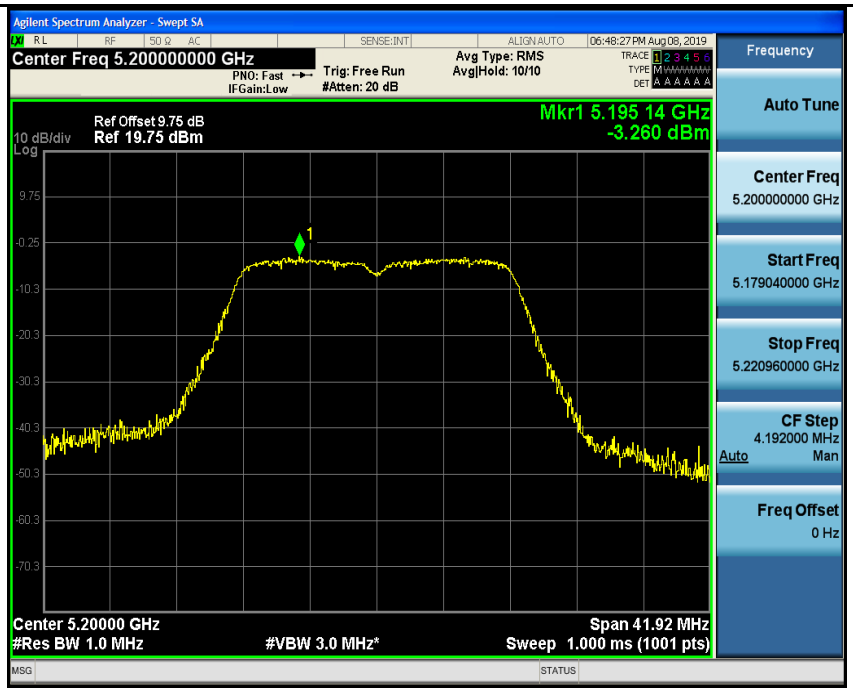

Mid

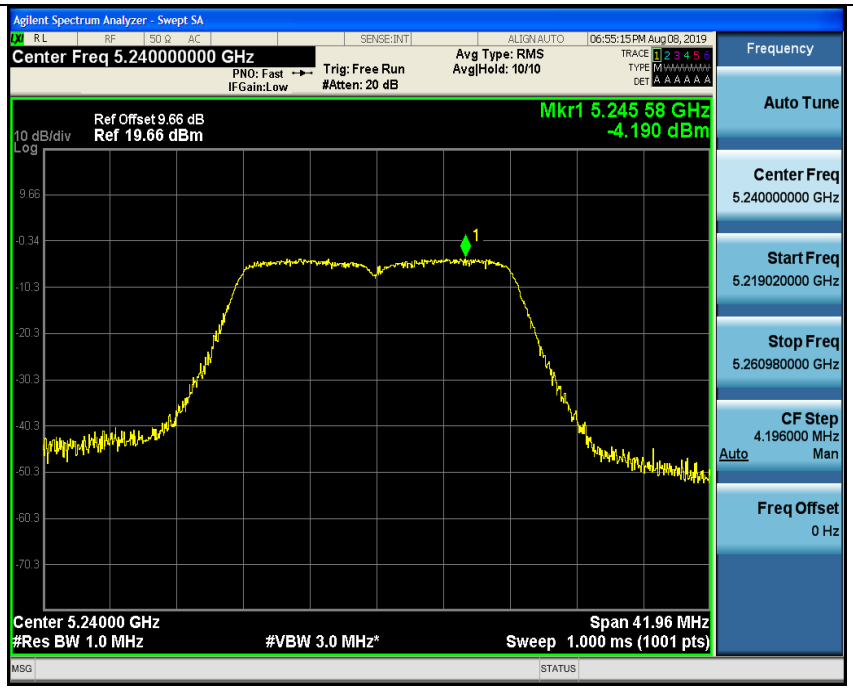

High

802.11ac(HT40)

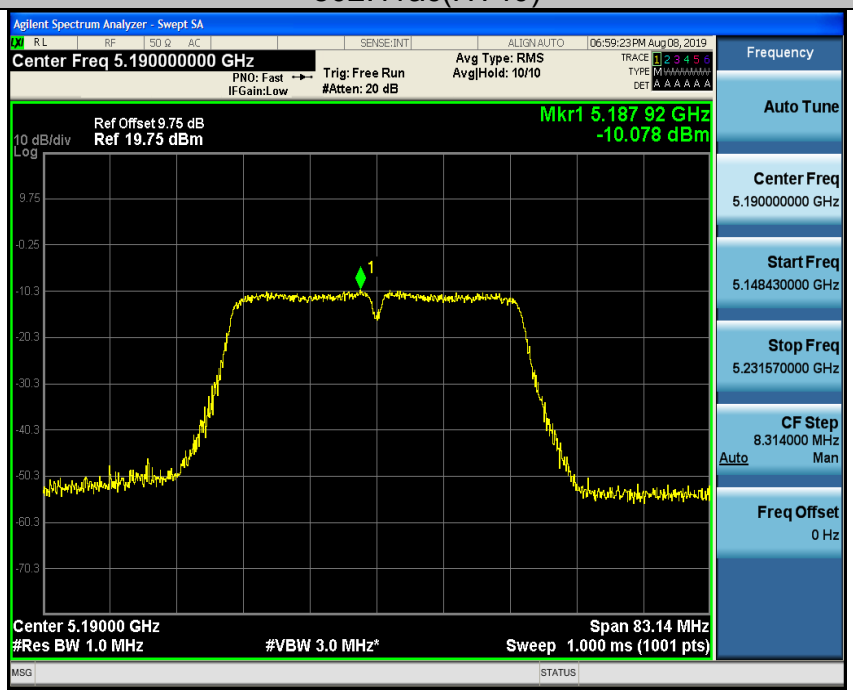

Low

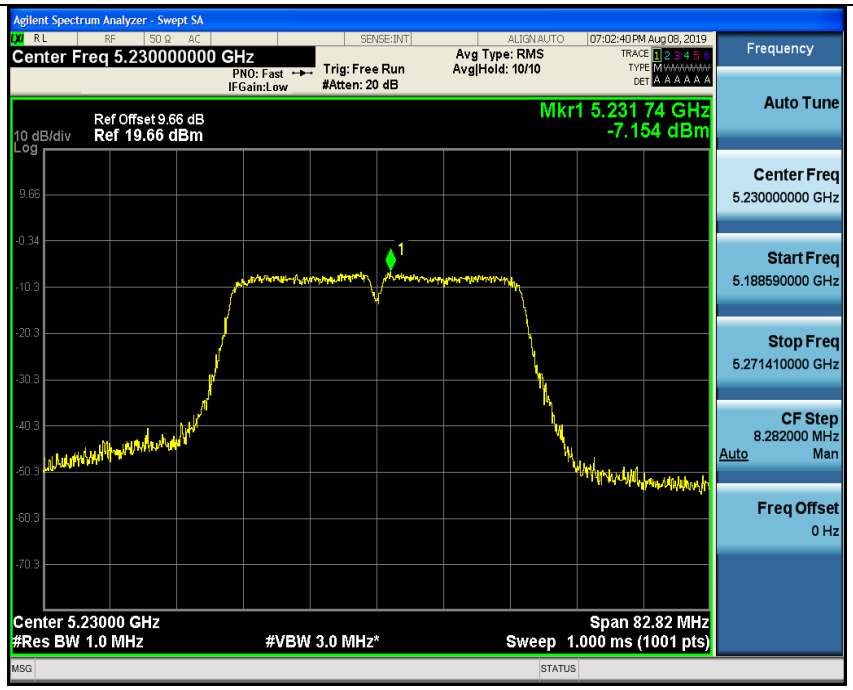

High

802.11ac(HT80)

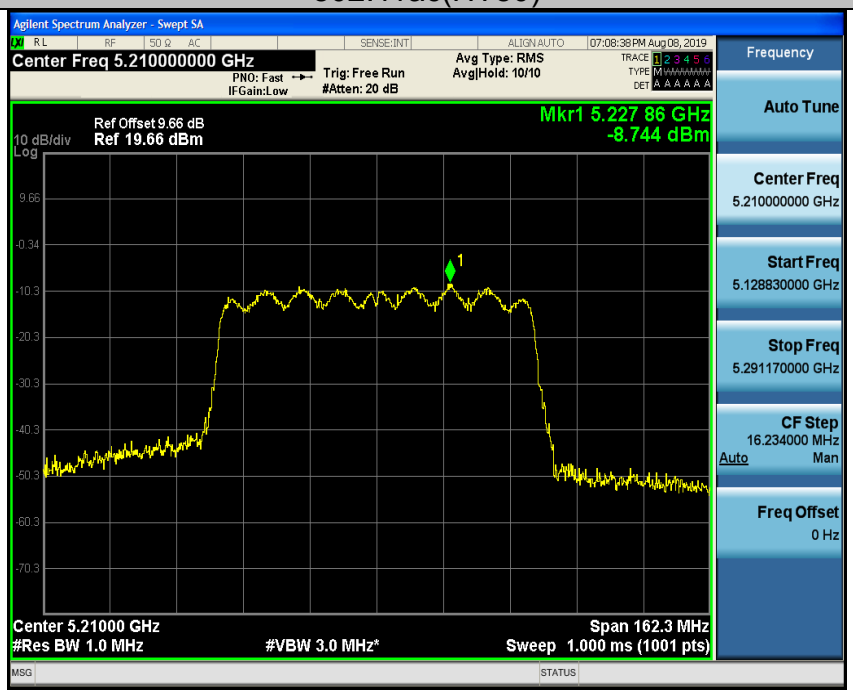

Low

For MIMO antenna port 1+antenna port 2

Configuration Band IV (5725 - 5850 MHz)				
Mode	Test channel	**Power Density (dBm)**	**Limit (dBm)**	**Result**
11a	CH149	/	30	**/**
11a	CH157	/	30	**/**
11a	CH161	/	30	**/**
11n(HT20)	CH149	0.26	30	**PASS**
11n(HT20)	CH157	-0.39	30	**PASS**
11n(HT20)	CH161	-0.14	30	**PASS**
11n(HT40)	CH151	-3.16	30	**PASS**
11n(HT40)	CH159	-3.22	30	**PASS**
11ac(HT20)	CH149	-0.84	30	**PASS**
11ac(HT20)	CH157	-0.35	30	**PASS**
11ac(HT20)	CH161	-1.17	30	**PASS**
11ac(HT40)	CH151	-5.81	30	**PASS**
11ac(HT40)	CH159	-4.15	30	**PASS**
11ac(HT80)	CH155	-6.13	30	**PASS**
	Note: 1 According to KDB 662911, Result power = $10\log(10^{(ant1/10}+10^{(ant2/10)})$. 2 Result unit: W, The end result is converted to units of dBm.			

Note: This product supports antenna 1 and antenna 2 launch, but only support 802.11 n/ac for MIMO mode,
not support 802.11 a for MIMO mode.

4.6. Band edge

4.6.1. Test Specification

Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	For band I&II&III: E[dBμV/m] = EIRP[dBm] + 95.2=68.2 dBμV/m, for EIRP(dBm)= **-27dBm** For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. For band IV(5715-5725MHz&5850-5860MHz): E[dBμV/m] = EIRP[dBm] + 95.2=78.2 dBμV/m, for EIRP(dBm)= **-27dBm**; For band IV(other un-restricted band):E[dBμV/m] = EIRP[dBm] + 95.2=68.2 dBμV/m, for EIRP(dBm)= **-27dBm**
Test Setup:	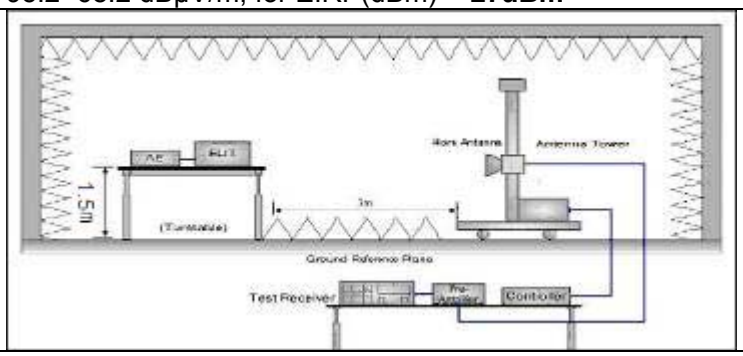
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the

	maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
Test Result:	PASS

4.6.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Receiver	R&S	ESRP3	HKE-005	Dec. 27, 2019
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Preamplifier	EMCI	EMC051845SE	HKE-015	Dec. 27, 2019
Preamplifier	Agilent	83051A	HKE-016	Dec. 27, 2019
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 26, 2019
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 26, 2019
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 26, 2019
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 27, 2019
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Dec. 27, 2019
RF cable	Tonscend	1-18G	HKE-099	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.6.3. Test Data

ANT 1
Operation Mode: 802.11a Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	51.54	-2.49	49.05	74	-24.95	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.25	-2.49	49.76	74	-24.24	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.53	-2.28	51.25	74	-22.75	peak
5250	/	-2.28	/	54	/	AVG
5350	51.66	-2.11	49.55	74	-24.45	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	52.25	-2.28	49.97	74	-24.03	peak
5250	/	-2.28	/	54	/	AVG
5350	51.65	-2.11	49.54	74	-24.46	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11n20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	53.36	-2.49	50.87	74	-23.13	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	51.55	-2.49	49.06	74	-24.94	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	51.33	-2.28	49.05	74	-24.95	peak
5250	/	-2.28	/	54	/	AVG
5350	50.54	-2.11	48.43	74	-25.57	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.63	-2.28	51.35	74	-22.65	peak
5250	/	-2.28	/	54	/	AVG
5350	50.31	-2.11	48.2	74	-25.8	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11 n40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.08	-2.49	49.59	74	-24.41	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	51.11	-2.49	48.62	74	-25.38	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.34	-2.28	51.06	74	-22.94	peak
5250	/	-2.28	/	54	/	AVG
5350	50.19	-2.11	48.08	74	-25.92	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	52.21	-2.28	49.93	74	-24.07	peak
5250	/	-2.28	/	54	/	AVG
5350	49.07	-2.11	46.96	74	-27.04	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11 ac20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.66	-2.49	50.17	74	-23.83	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.37	-2.49	49.88	74	-24.12	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5250	53.64	-2.28	51.36	74	-22.64	peak
5250	/	-2.28	/	54	/	AVG
5350	52.37	-2.11	50.26	74	-23.74	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5250	53.23	-2.28	50.95	74	-23.05	peak
5250	/	-2.28	/	54	/	AVG
5350	50.37	-2.11	48.26	74	-25.74	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11 ac40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	53.39	-2.49	50.9	74	-23.1	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	51.33	-2.49	48.84	74	-25.16	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5250	65.27	-2.28	62.99	74	-11.01	peak
5250	/	-2.28	/	54	/	AVG
5350	52.69	-2.11	50.58	74	-23.42	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5250	64.67	-2.28	62.39	74	-11.61	peak
5250	/	-2.28	/	54	/	AVG
5350	51.39	-2.11	49.28	74	-24.72	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11 ac80 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5150	53.21	-2.49	50.72	74	-23.28	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5150	51.2	-2.49	48.71	74	-25.29	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.14	-2.28	50.86	74	-23.14	peak
5250	/	-2.28	/	54	/	AVG
5350	51.21	-2.11	49.1	74	-24.9	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.09	-2.28	50.81	74	-23.19	peak
5250	/	-2.28	/	54	/	AVG
5350	50.55	-2.11	48.44	74	-25.56	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

ANT 2
Operation Mode: 802.11a Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	51.17	-2.49	48.68	74	-25.32	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.35	-2.49	49.86	74	-24.14	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.09	-2.28	50.81	74	-23.19	peak
5250	/	-2.28	/	54	/	AVG
5350	52.6	-2.11	50.49	74	-23.51	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	52.21	-2.28	49.93	74	-24.07	peak
5250	/	-2.28	/	54	/	AVG
5350	51.34	-2.11	49.23	74	-24.77	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11n20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	56.36	-2.49	53.87	74	-20.13	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	51.14	-2.49	48.65	74	-25.35	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	55.04	-2.28	52.76	74	-21.24	peak
5250	/	-2.28	/	54	/	AVG
5350	51.6	-2.11	49.49	74	-24.51	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.21	-2.28	50.93	74	-23.07	peak
5250	/	-2.28	/	54	/	AVG
5350	50.63	-2.11	48.52	74	-25.48	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11 n40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.3	-2.49	49.81	74	-24.19	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.47	-2.49	49.98	74	-24.02	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.16	-2.28	50.88	74	-23.12	peak
5250	/	-2.28	/	54	/	AVG
5350	50.06	-2.11	47.95	74	-26.05	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	52.28	-2.28	50	74	-24	peak
5250	/	-2.28	/	54	/	AVG
5350	51.59	-2.11	49.48	74	-24.52	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11 ac20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	54.96	-2.49	52.47	74	-21.53	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.34	-2.49	49.85	74	-24.15	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	54.31	-2.28	52.03	74	-21.97	peak
5250	/	-2.28	/	54	/	AVG
5350	52.09	-2.11	49.98	74	-24.02	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.42	-2.28	51.14	74	-22.86	peak
5250	/	-2.28	/	54	/	AVG
5350	50.14	-2.11	48.03	74	-25.97	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11 ac40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	53.36	-2.49	50.87	74	-23.13	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	51.77	-2.49	49.28	74	-24.72	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5250	56.39	-2.28	54.11	74	-19.89	peak
5250	/	-2.28	/	54	/	AVG
5350	52.08	-2.11	49.97	74	-24.03	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5250	53.41	-2.28	51.13	74	-22.87	peak
5250	/	-2.28	/	54	/	AVG
5350	50.28	-2.11	48.17	74	-25.83	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11 ac80 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5150	51.37	-2.49	48.88	74	-25.12	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5150	51.63	-2.49	49.14	74	-24.86	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	55.48	-2.28	53.2	74	-20.8	peak
5250	/	-2.28	/	54	/	AVG
5350	50.54	-2.11	48.43	74	-25.57	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	52.37	-2.28	50.09	74	-23.91	peak
5250	/	-2.28	/	54	/	AVG
5350	50.1	-2.11	47.99	74	-26.01	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

4.7. Spurious Emission

4.7.1.1. Test Specification

<table>
<tr><td>Test Requirement:</td><td>FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205</td></tr>
<tr><td>Test Method:</td><td>KDB 789033 D02 v02r01</td></tr>
<tr><td>Frequency Range:</td><td>9kHz to 40GHz</td></tr>
<tr><td>Measurement Distance:</td><td>3 m</td></tr>
<tr><td>Antenna Polarization:</td><td>Horizontal & Vertical</td></tr>
<tr><td>Operation mode:</td><td>Transmitting mode with modulation</td></tr>
<tr><td>Receiver Setup:</td><td>
<table>
<tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr>
<tr><td>9kHz- 150kHz</td><td>Quasi-peak</td><td>200Hz</td><td>1kHz</td><td>Quasi-peak Value</td></tr>
<tr><td>150kHz-30MHz</td><td>Quasi-peak</td><td>9kHz</td><td>30kHz</td><td>Quasi-peak Value</td></tr>
<tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr>
<tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr>
<tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr>
</table>
</td></tr>
<tr><td>Limit:</td><td>Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the
general field strength limits set forth in § 15.209 as below table,
<table>
<tr><td>Frequency</td><td>Field Strength (microvolts/meter)</td><td>Measurement Distance (meters)</td></tr>
<tr><td>0.009-0.490</td><td>2400/F(KHz)</td><td>300</td></tr>
<tr><td>0.490-1.705</td><td>24000/F(KHz)</td><td>30</td></tr>
<tr><td>1.705-30</td><td>30</td><td>30</td></tr>
<tr><td>30-88</td><td>100</td><td>3</td></tr>
<tr><td>88-216</td><td>150</td><td>3</td></tr>
<tr><td>216-960</td><td>200</td><td>3</td></tr>
<tr><td>Above 960</td><td>500</td><td>3</td></tr>
</table>
<table>
<tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Detector</td></tr>
<tr><td rowspan="2">Above 1G</td><td>74.0</td><td>Peak</td></tr>
<tr><td>54.0</td><td>Average</td></tr>
</table>
</td></tr>
<tr><td>Test setup:</td><td>For radiated emissions below 30MHz
 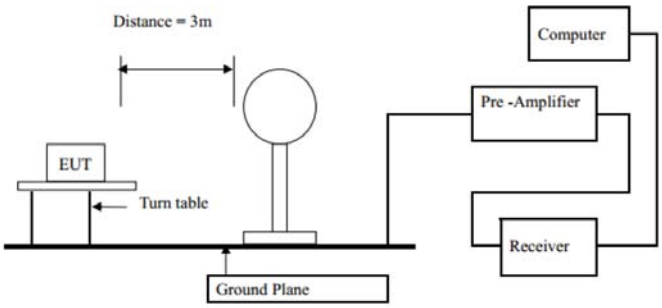

30MHz to 1GHz</td></tr>
</table>

	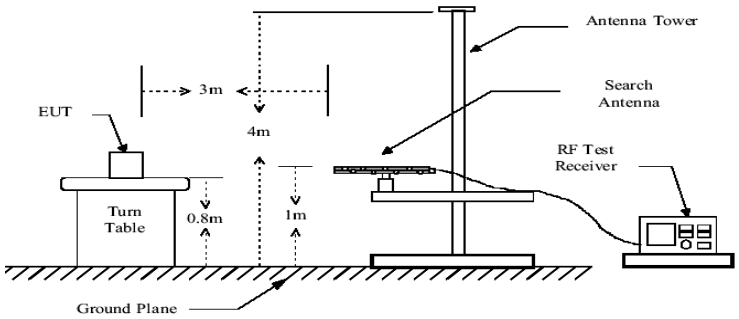 Above 1GHz 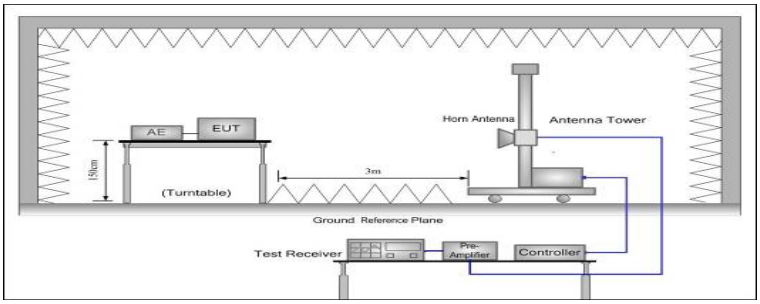
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the groundat a 3 meter camber. The table was rotated 360 degrees todetermine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and thenthe antenna was tuned to heights from 1 meter to 4 meters and the rotatablewas turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and SpecifiedBandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limitspecified, then testing could be stopped and the peak values of the EUT wouldbe reported. Otherwise the emissions that did not have 10dB margin would bere-tested one by one using peak, quasi-peak or average method as specified andthen reported in a data sheet.
Test results:	PASS

4.7.2. Test Data

test mode: TX 802.11a 5180MHz

All the test modes completed for test. The worst case of Radiated Emission; the test data of this mode was reported.

Below 1GHz

Horizontal

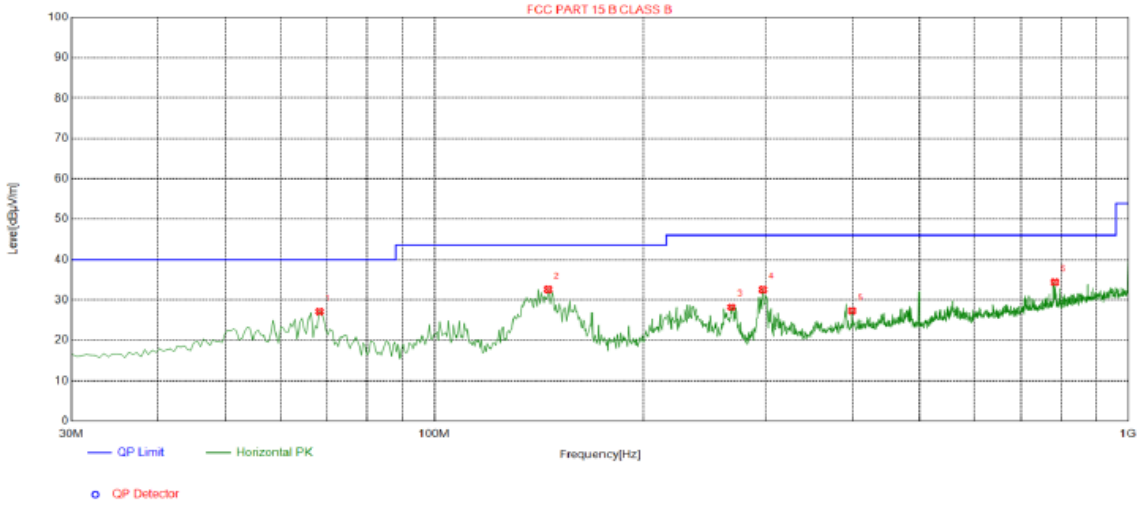

Suspected List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	68.3150	27.12	-17.25	40.00	12.88	100	291	Horizontal
2	145.915	32.64	-19.04	43.50	10.86	100	52	Horizontal
3	268.135	28.21	-13.63	46.00	17.79	100	144	Horizontal
4	297.720	32.58	-12.76	46.00	13.42	100	131	Horizontal
5	400.055	27.28	-10.40	46.00	18.72	100	288	Horizontal
6	784.175	34.38	-3.26	46.00	11.62	100	42	Horizontal

Remark:
Margin = Limit – Level
Level=Test receiver reading + factor
Factor= Antenna factor + cable loss- Amp factor

Vertical

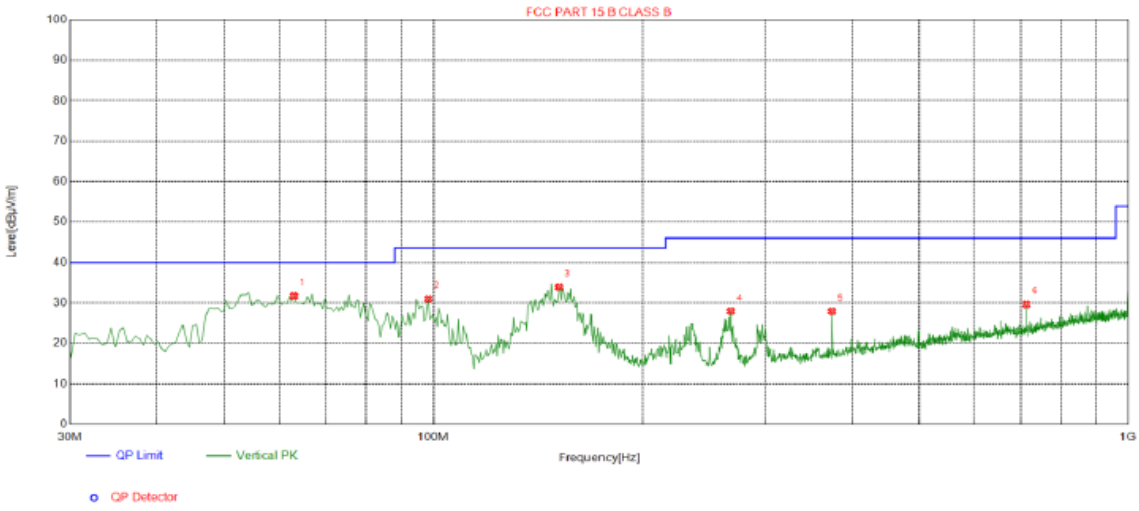

Suspected List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	62.9800	31.70	-15.91	40.00	8.30	100	244	Vertical
2	98.3850	30.99	-15.67	43.50	12.51	100	145	Vertical
3	151.735	33.91	-18.82	43.50	9.59	100	166	Vertical
4	268.135	27.97	-13.63	46.00	18.03	100	228	Vertical
5	374.835	27.93	-10.92	46.00	18.07	100	318	Vertical
6	713.850	29.64	-4.81	46.00	16.36	100	128	Vertical

Remark:
Margin = Limit – Level
Level=Test receiver reading + factor
Factor= Antenna factor + cable loss- Amp factor

Harmonics and Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note:*1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor*

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Above 1GHz

LOW CH 36 (802.11 a Mode with 5.2G)/5180

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.24	-4.59	56.65	74	-17.35	peak
3647	47.67	-4.59	43.08	54	-10.92	AVG
10360	52.58	3.74	56.32	74	-17.68	peak
10360	41.12	3.74	44.86	54	-9.14	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.17	-4.59	56.58	74	-17.42	peak
3647	45.26	-4.59	40.67	54	-13.33	AVG
10360	51.37	3.74	55.11	74	-18.89	peak
10360	40.09	3.74	43.83	54	-10.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

MID CH40 (802.11 a Mode with 5.2G)/5200
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.68	-4.59	58.09	74	-15.91	peak
3647	45.5	-4.59	40.91	54	-13.09	AVG
10400	53.36	3.74	57.1	74	-16.9	peak
10400	40.27	3.74	44.01	54	-9.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.14	-4.59	57.55	74	-16.45	peak
3647	44.57	-4.59	39.98	54	-14.02	AVG
10400	53.36	3.74	57.1	74	-16.9	peak
10400	49.78	3.74	53.52	54	-0.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

HIGH CH 48 (802.11a Mode with 5.2G)/5240
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	60.58	-4.59	55.99	74	-18.01	peak
3647	44.41	-4.59	39.82	54	-14.18	AVG
10480	53.54	3.75	57.29	74	-16.71	peak
10480	41.65	3.75	45.4	54	-8.6	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.16	-4.59	56.57	74	-17.43	peak
3647	45.33	-4.59	40.74	54	-13.26	AVG
10480	51.41	3.75	55.16	74	-18.84	peak
10480	61.59	3.75	65.34	54	11.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark：
(1) Measuring frequencies from 1 GHz to the 25 GHz。
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
(4) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

4.8. Frequency Stability Measurement

4.8.1. Test Specification

Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	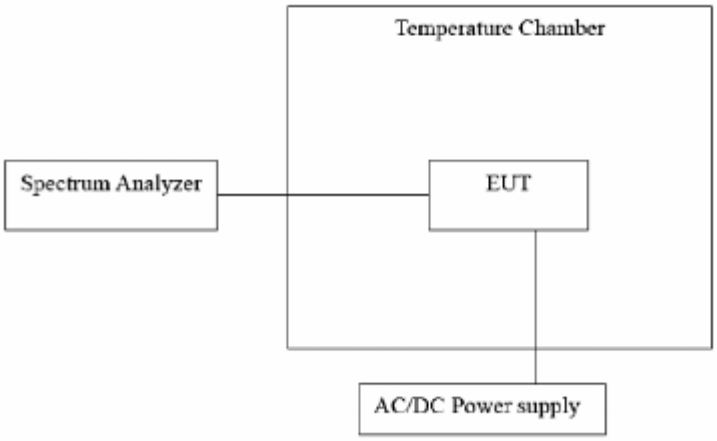
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A

Test Result as follows:

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	43.2V	5180.027	13	5239.811	14
	48.0V	5179.930	12	5239.914	17
	52.8 V	5179.851	16	5240.012	12

Mode	Temperature (℃)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	-30	5179.902	32	5240.044	34
	-20	5179.731	33	5239.619	32
	-10	5179.753	29	5239.733	27
	0	5179.815	26	5240.018	25
	10	5179.724	28	5239.863	18
	20	5179.933	14	5239.911	20
	30	5179.666	19	5239.998	23
	40	5179.714	21	5240.221	21
	50	5179.617	28	5240.023	34

4.9. ANTENNA REQUIREMENT

Standard Applicable
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.
The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction
The antenna used in this product is a External Antenna, and the best case gain of the antenna is Antenna port 1:1dBi and Antenna port 2:1dBi.

WIFI ANTENNA

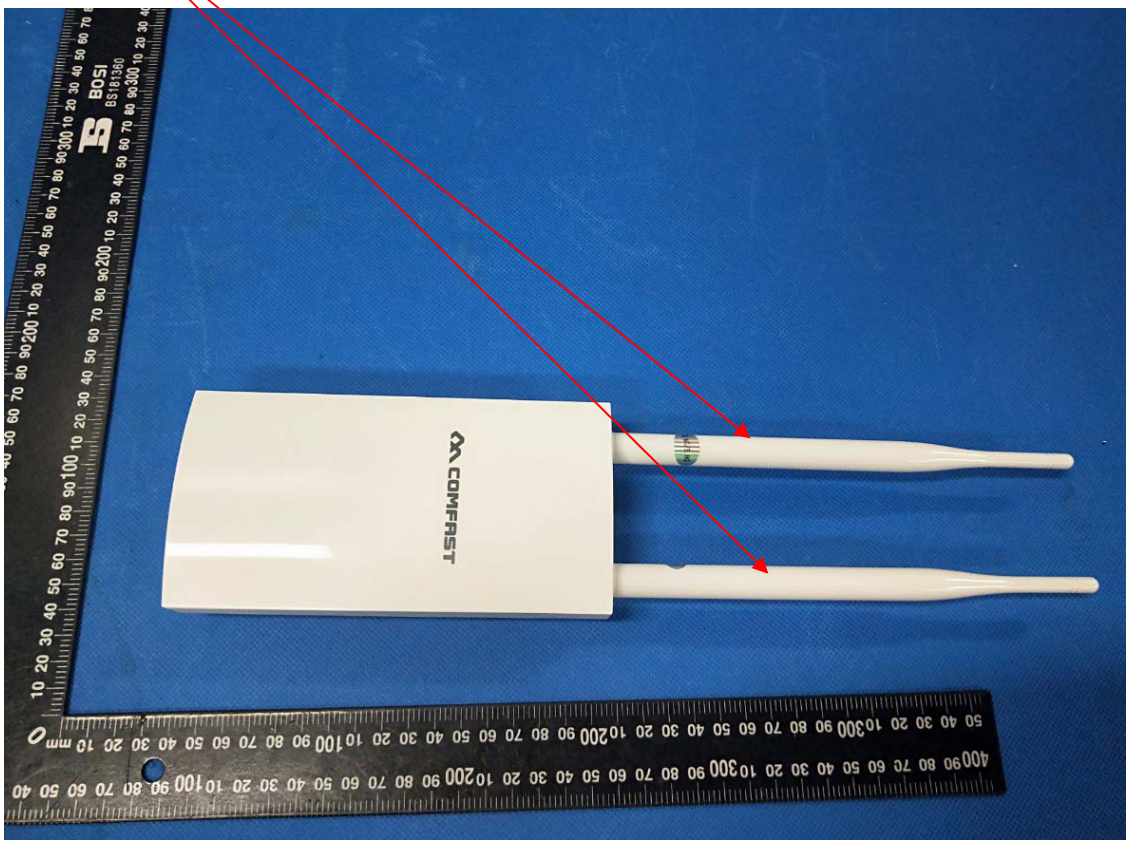

4.10. Photographs of Test Setup

Radiated Emission

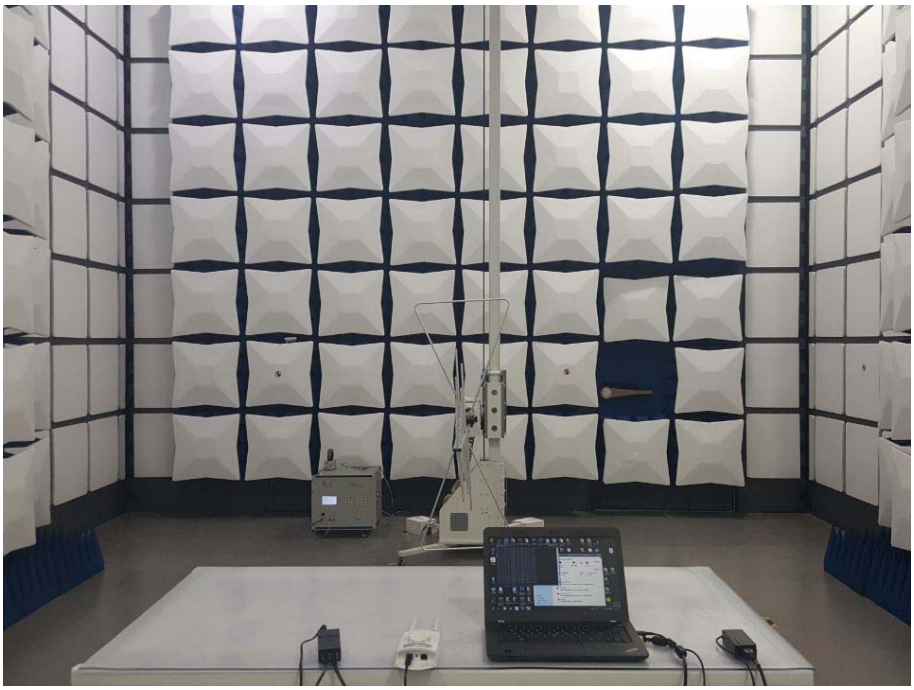

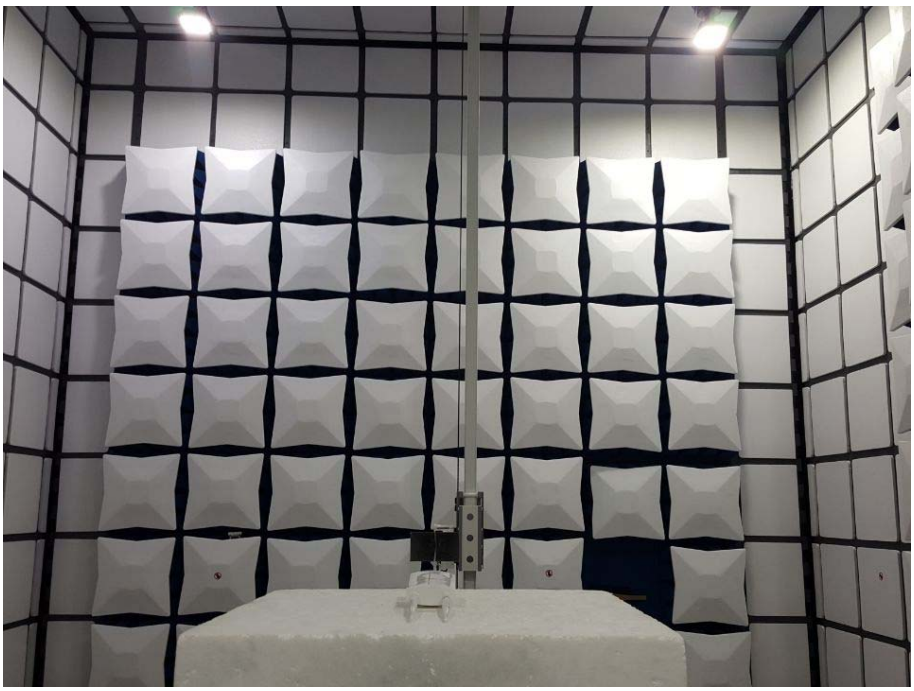

Conducted Emission

4.11. PHOTOS OF THE EUT

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos