

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Report No.: RFBEIH-WTW-P25120492-1
FCC ID: P27-SG1072B
Product: DOCSIS Communication Apparatus
Brand: Sercomm
Model No.: SG1072B
Received Date: 2025/12/19
Test Date: 2026/3/12 ~ 2026/3/26
Issued Date: 2026/4/2
Applicant: Sercomm Corporation
Address: 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory
Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration / 723255 / TW2022
Designation Number:

Approved by: _____

Wen Yu / Assistant Manager

, Date: _____

2026/4/2

This test report consists of 155 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by: Vito Lung / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	7
3.3 EUT Power Level.....	8
4 Test Instruments	9
4.1 U-NII Detection Bandwidth	9
4.2 Channel Availability Check Time	9
4.3 Channel Closing Transmission and Channel Move Time	9
4.4 Non-Occupancy Period	9
4.5 Statistical Performance Check	9
5 Limits of Test Items.....	10
5.1 Working Modes and Required Test Items	10
5.2 Test Limits and Radar Signal Parameters	10
6 Test Arrangements.....	14
6.1 Test Setup.....	14
6.2 Test Procedure	15
6.2.1 DFS Measurement System	15
6.2.2 Calibration of DFS Detection Threshold Level.....	18
6.2.3 DFS Detection Threshold.....	18
6.2.4 DFS Companion Device	24
7 Test Results of Test Item	25
7.1 U-NII Detection Bandwidth	25
7.2 Channel Availability Check Time	31
7.3 Channel Closing Transmission and Channel Move Time	33
7.4 Non-Occupancy Period	38
7.5 Statistical Performance Check	41
8 Declaration of Conformity by the Manufacturer	72
8.1 Transmit Power Control (TPC)	72
8.2 Statement of Manufacturer	72
9 Pictures of Test Arrangements	73
10 Information of the Testing Laboratories	74
11 Appendix.....	75
11.1 Radar Test Signal	75

Release Control Record

Issue No.	Description	Date Issued
RFBEIH-WTW-P25120492-1	Original release.	2026/4/2

1 Certificate

Product: DOCSIS Communication Apparatus

Brand: Sercomm

Test Model: SG1072B

Sample Status: Engineering sample

Applicant: Sercomm Corporation

Test Date: 2026/3/12 ~ 2026/3/26

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(h)	U-NII Detection Bandwidth	Pass	Applicable
15.407(h)	Channel Availability Check Time	Pass	Applicable
15.407(h)	Channel Closing Transmission and Channel Move Time	Pass	Applicable
15.407(h)	Non-Occupancy Period	Pass	Applicable
15.407(h)	Statistical Performance Check	Pass	Applicable
15.407(h)	Non-Associated Test	N/A	Not Applicable

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	DOCSIS Communication Apparatus
Brand	Sercomm
Test Model	SG1072B
DFS Firmware/software version	5.15(aarch64)25.438.50.0
Operational Mode	Master (with TPC function)
Operating Frequency Band	5.25 GHz ~ 5.35 GHz 5.47 GHz ~ 5.725 GHz
Communication Mode	IP based
Channel Puncturing Function	Not Support

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type
Ant1_5G	Airgain	NA	3.2	5.15 GHz ~ 5.85 GHz	Dipole	ipex(MHF)
Ant2_5G	Airgain	NA	3.7	5.15 GHz ~ 5.85 GHz	Dipole	ipex(MHF)

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The directional antenna gain, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)
5.15 ~ 5.25	2.6
5.25 ~ 5.35	2.3
5.47 ~ 5.725	2.9
5.725 ~ 5.85	2.8

3. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ac (VHT160)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
802.11ax (HE160)	2TX	2RX
802.11be (EHT20)	2TX	2RX
802.11be (EHT40)	2TX	2RX
802.11be (EHT80)	2TX	2RX
802.11be (EHT160)	2TX	2RX

3.3 EUT Power Level

Highest Power Level						
Signal Mode	Frequency Band (MHz)	Conducted Power		Gain (dBi)	EIRP	
		(mW)	(dBm)		(mW)	(dBm)
CDD	5250-5350	249.184	23.97	3.7	584.144	27.67
	5470-5725	246.964	23.93	3.7	578.94	27.63
Beamforming	5250-5350	247.161	23.93	2.9	481.926	26.83
	5470-5725	246.964	23.93	2.9	481.541	26.83

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 U-NII Detection Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXG Vector Signal Generator Keysight	N5182B	MY53052700	2025/7/19	2026/7/18
Programmable Step Attenuator Agilent	8496H-002	MY42143989	2025/10/22	2026/10/21
Signal & Spectrum Analyzer R&S	FSV3044	101506	2025/6/12	2026/6/11
Software BV	BVDFS_Auto- ISM_Workbench_V2A2	N/A	N/A	N/A

Notes:

1. The test was performed in HC - DFS-2 room(Hsinchu).
2. Tested Date: 2026/3/12 ~ 2026/3/26

4.2 Channel Availability Check Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.3 Channel Closing Transmission and Channel Move Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 Non-Occupancy Period

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Statistical Performance Check

Refer to section 4.1 to get the tested date and information of the instruments.

5 Limits of Test Items

5.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 1: Applicability of DFS Requirements Prior To Use a Channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓ note	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Note: Per KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.

Table 2: Applicability of DFS Requirements during Normal Operation.

Requirement	Operational Mode	
	Master or Client with radar detection	Client without radar detection
DFS Detection Threshold	✓	Not required
Channel Closing Transmission Time	✓	✓
Channel Move Time	✓	✓
U-NII Detection Bandwidth	✓	Not required

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

5.2 Test Limits and Radar Signal Parameters

Detection Threshold Values

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Parameters of DFS Test Waveforms

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a ----- Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\lceil \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 6: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30
Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency. a) the Channel center frequency b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth It include 10 trails for every subset, the formula as below, For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel. For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by: $FL + (0.4 * \text{Chirp Width [in MHz]})$ For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by: $FH - (0.4 * \text{Chirp Width [in MHz]})$							

Table 7: Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

6 Test Arrangements

6.1 Test Setup

Conducted measurement

Master Mode

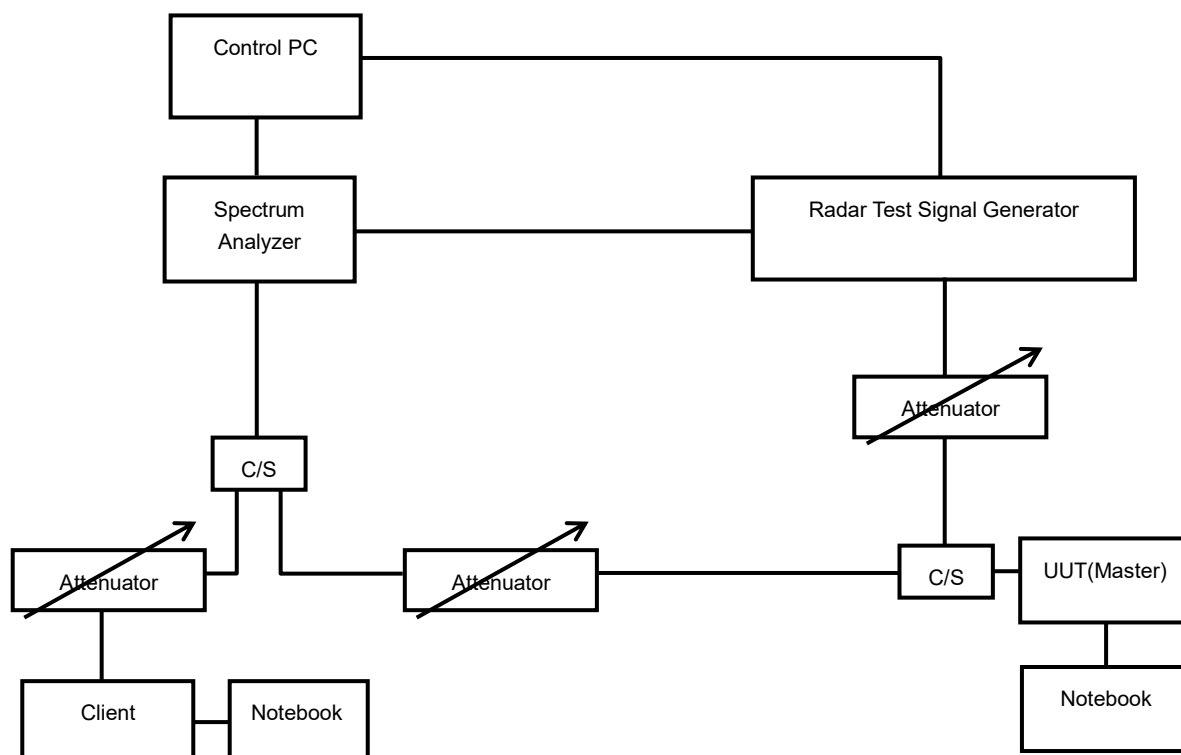


The UUT is a U-NII Device operating in Master mode. The radar test signals are injected into the Master Device.

6.2 Test Procedure

6.2.1 DFS Measurement System

A complete DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating system and (2) the Traffic Monitoring system. The control PC is necessary for generating the Radar waveforms in Table 5, 6 and 7. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

Conducted Setup Configuration of DFS Measurement System

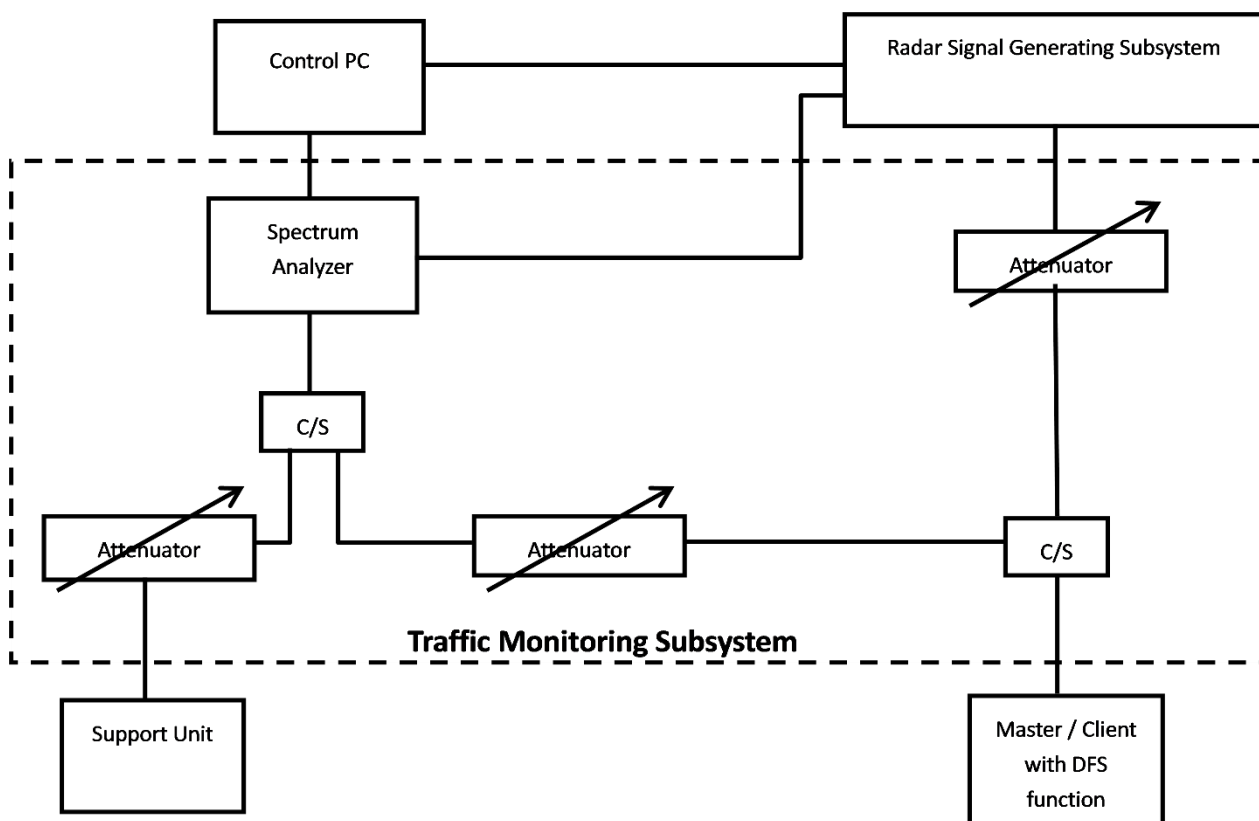


Channel Loading

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

Applicable	Requirements apply
	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
√	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.


Plots of Channel Loading

Duty Cycle

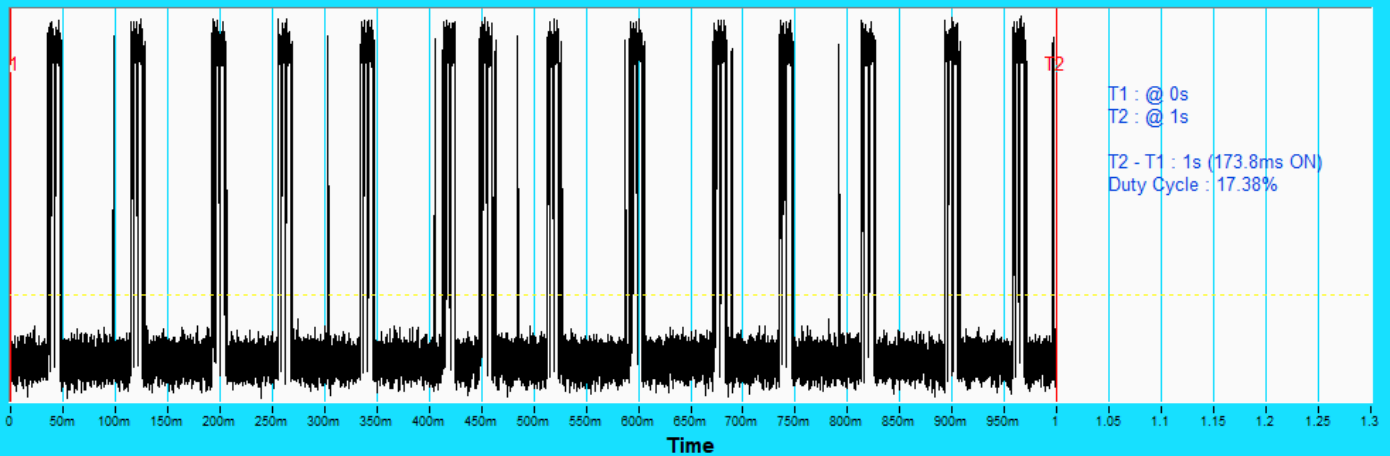


802.11be (EHT20)

Duty Cycle

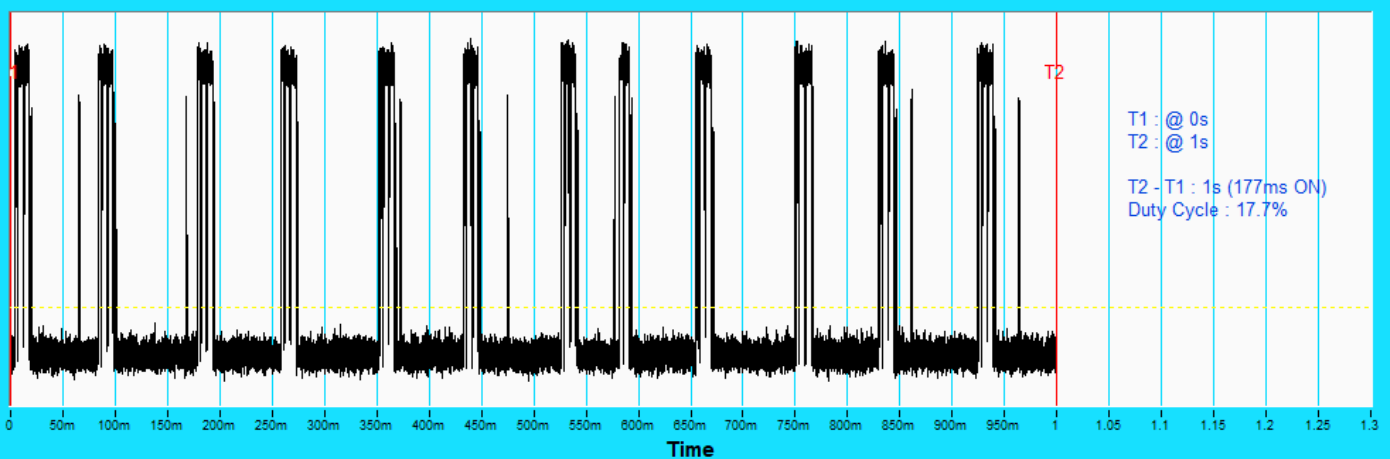

802.11be (EHT40)


Duty Cycle

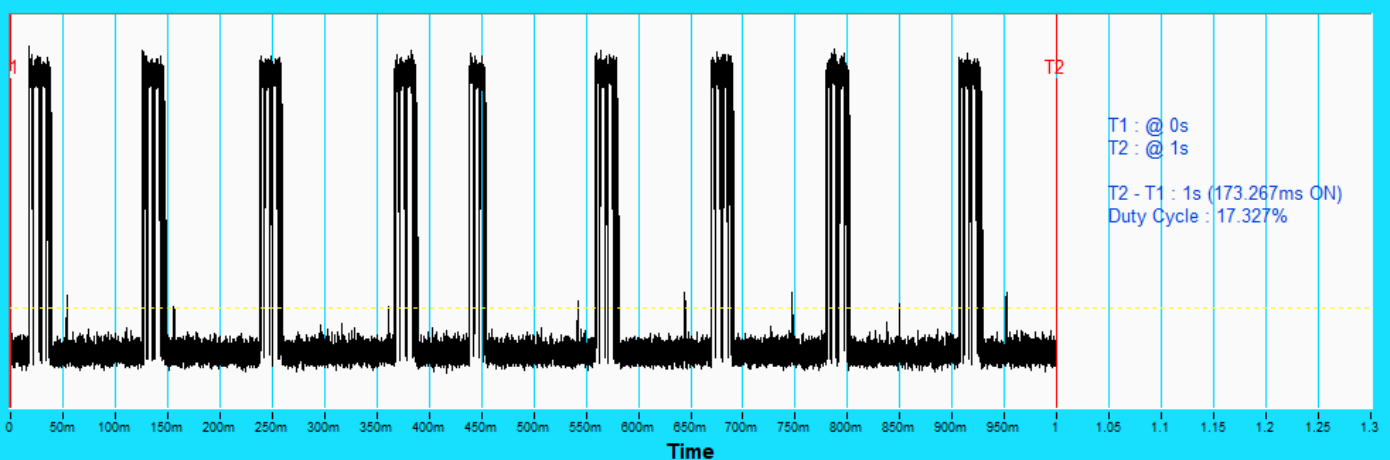

802.11be (EHT80)

Plots of Channel Loading

Duty Cycle

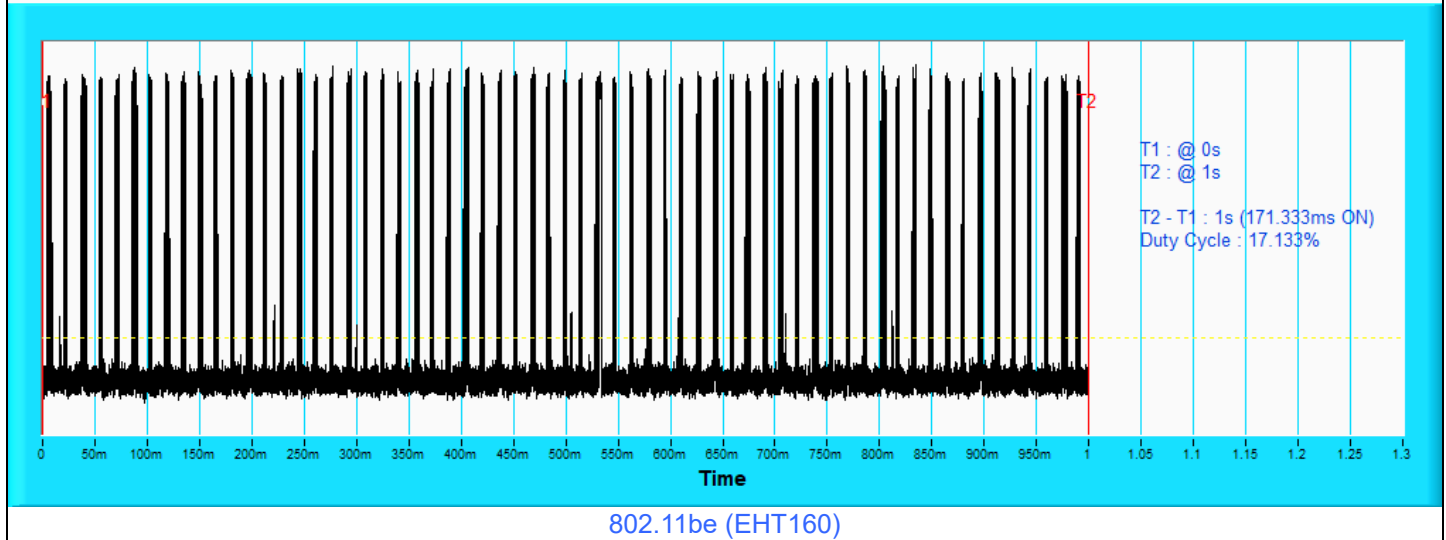


6.2.2 Calibration of DFS Detection Threshold Level

The measured channel is chosen from the operating channels of the UUT within the DFS band and using the all bandwidth mode available for the link. The radar signal was the same as transmitted channels, and injected into the antenna of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

Conducted Setup Configuration of Calibration of DFS Detection Threshold Level

The calibrated conducted detection threshold level is set to -64 dBm. The tested level is lower than required level hence it provides margin to the limit.

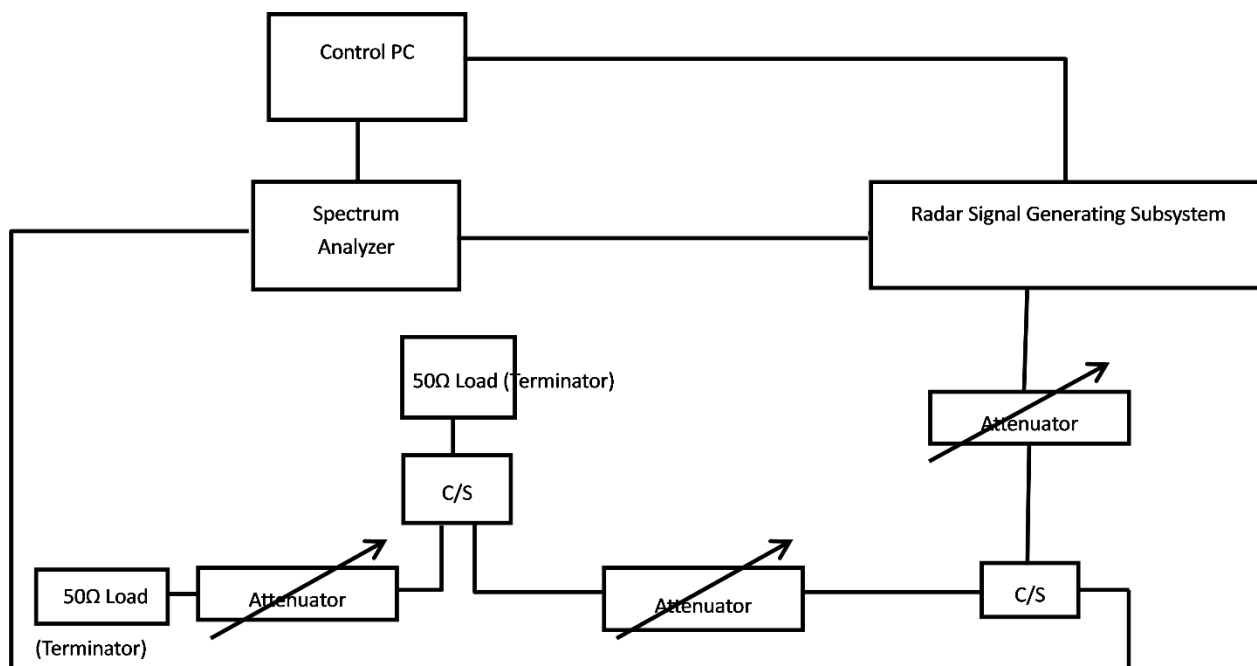

6.2.3 DFS Detection Threshold


Test Mode: Device Operating in Master Mode

The radar test waveforms are injected into the Master.


The antenna net gain is 3.2 dBi.

DFS Detection Threshold = -64 dBm + 3.2 dBi + 1 dB = -59.8 dBm


The calibrated conducted detection threshold level is lower than -59.8 dBm.

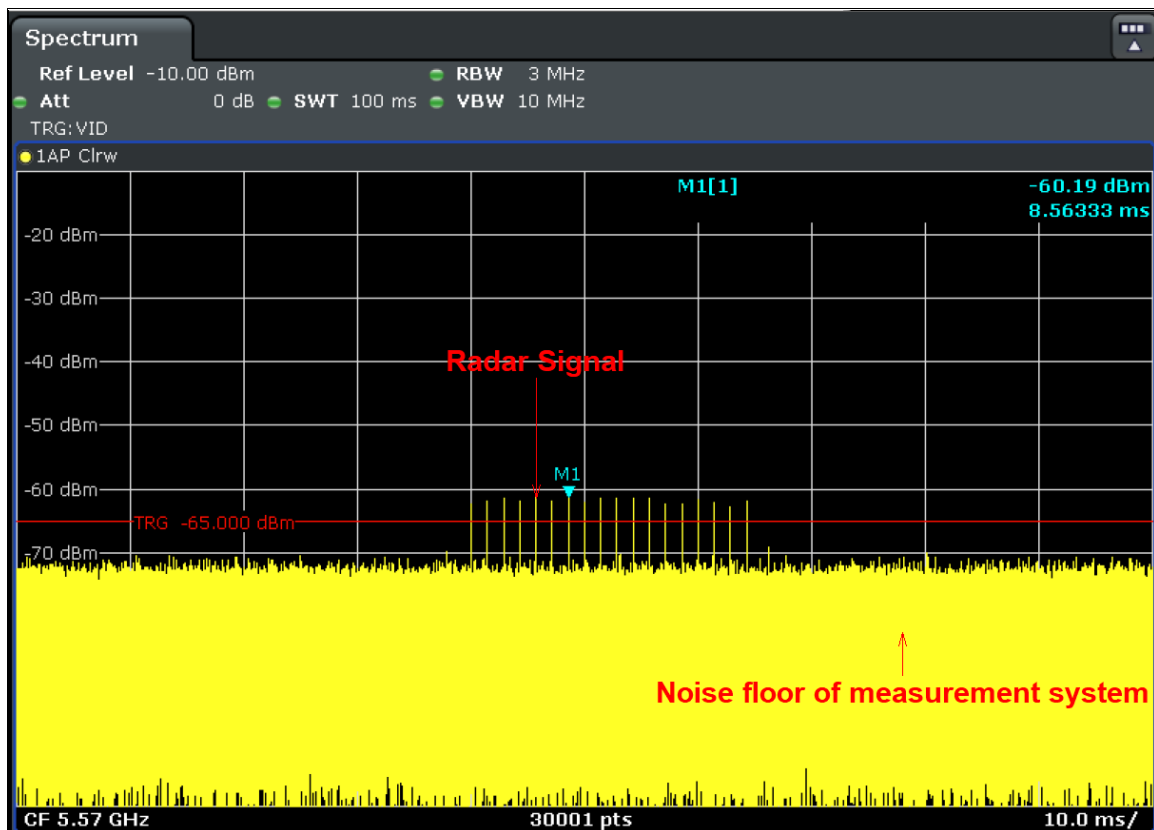


Radar Signal 0

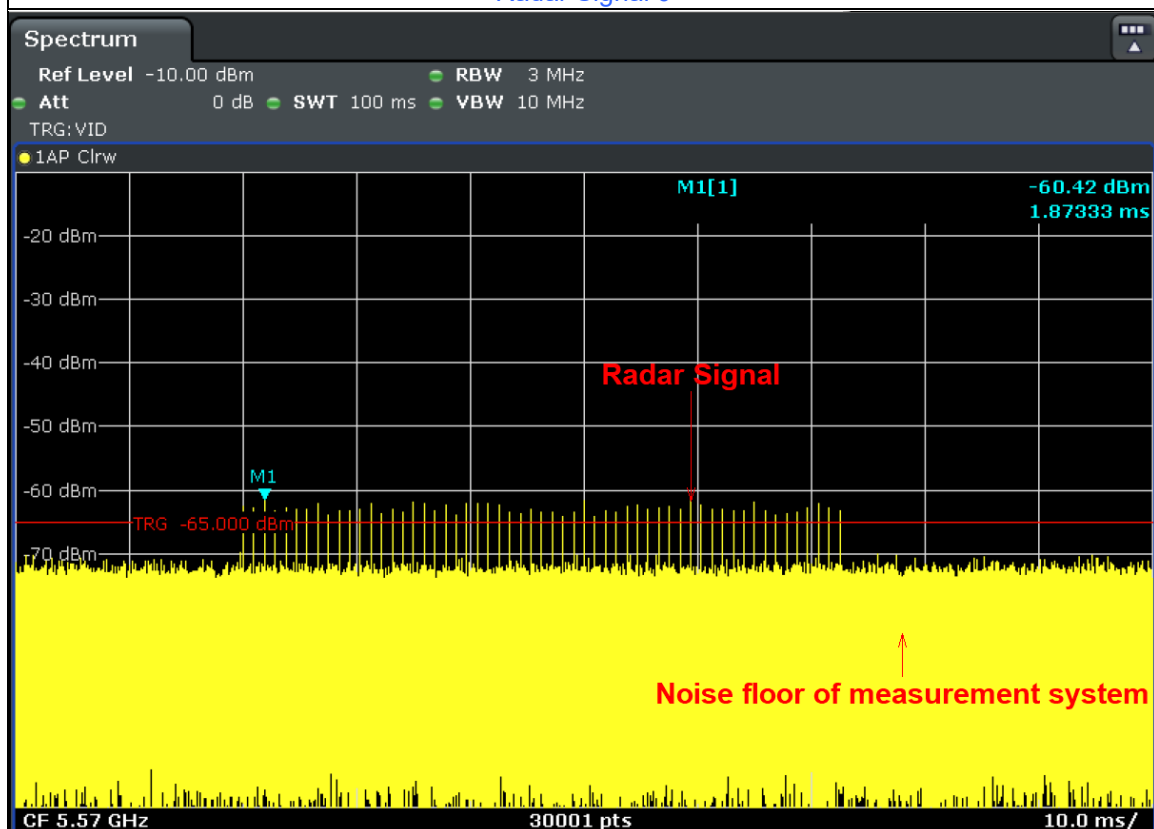


Radar Signal 1 (Test A)

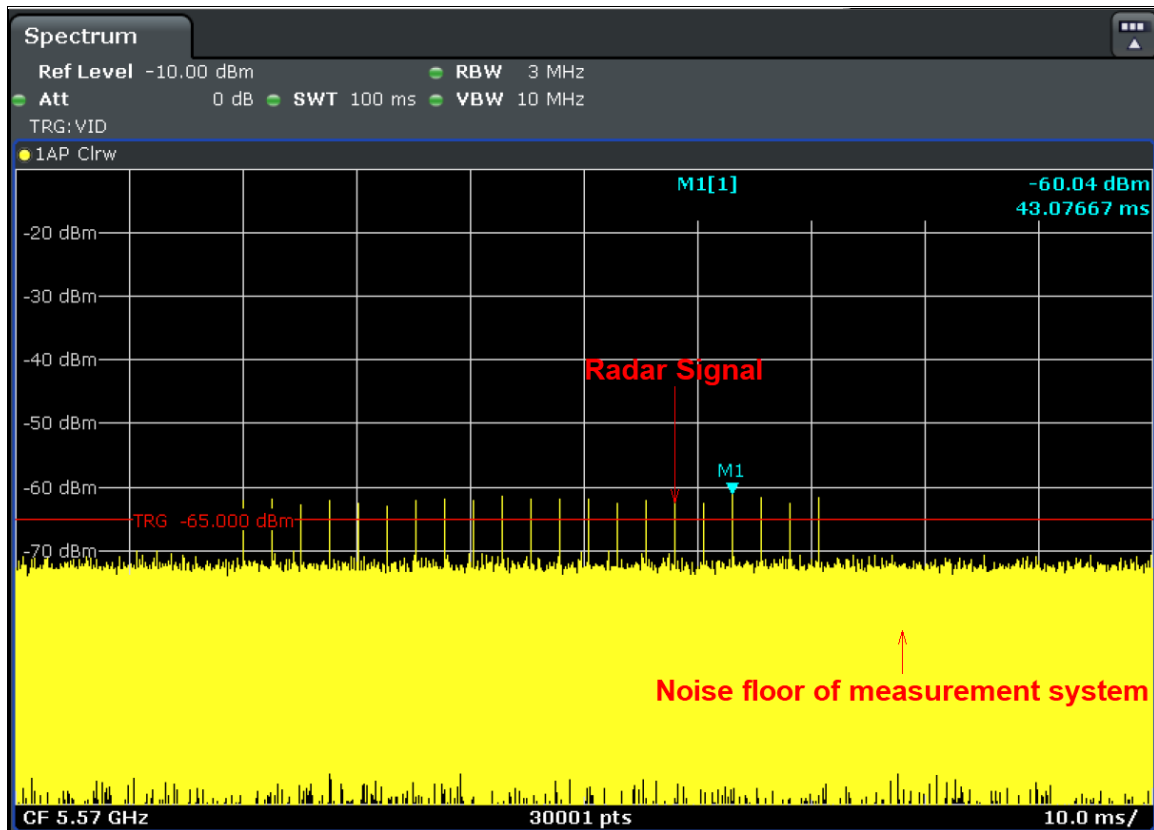


Radar Signal 1 (Test B)

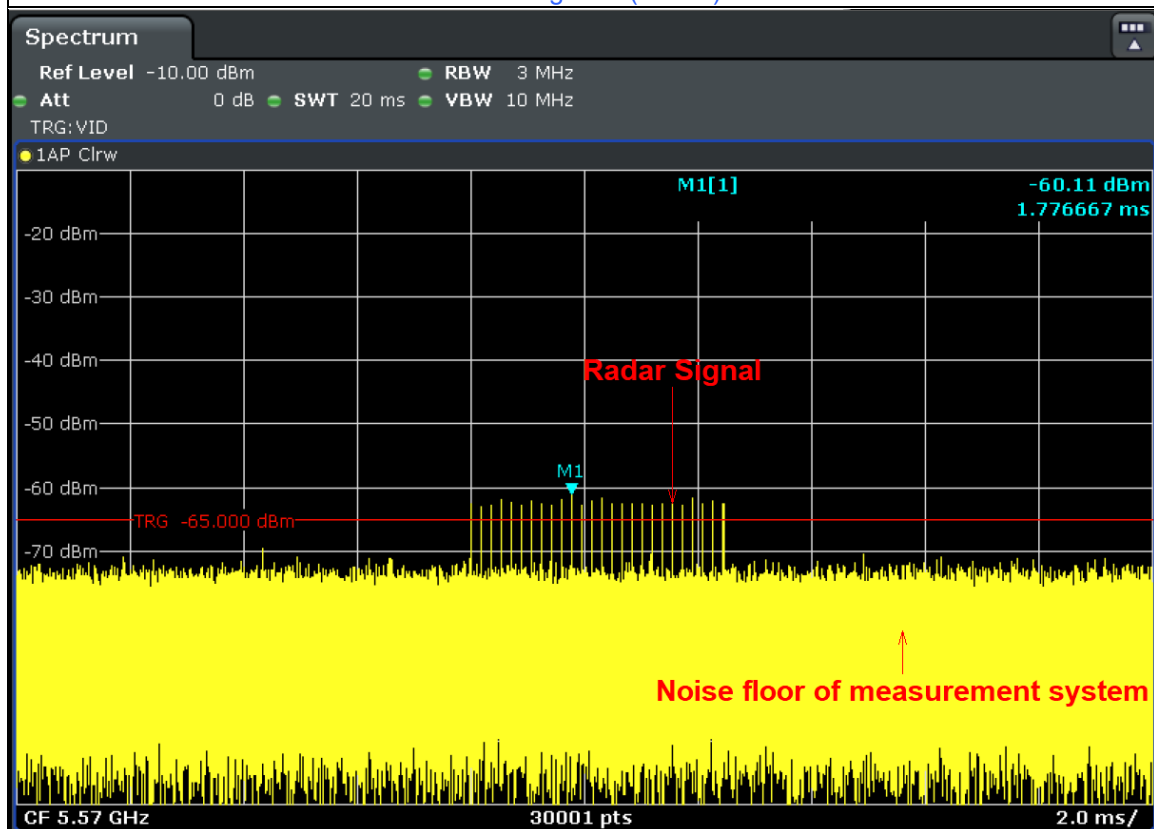


Radar Signal 2

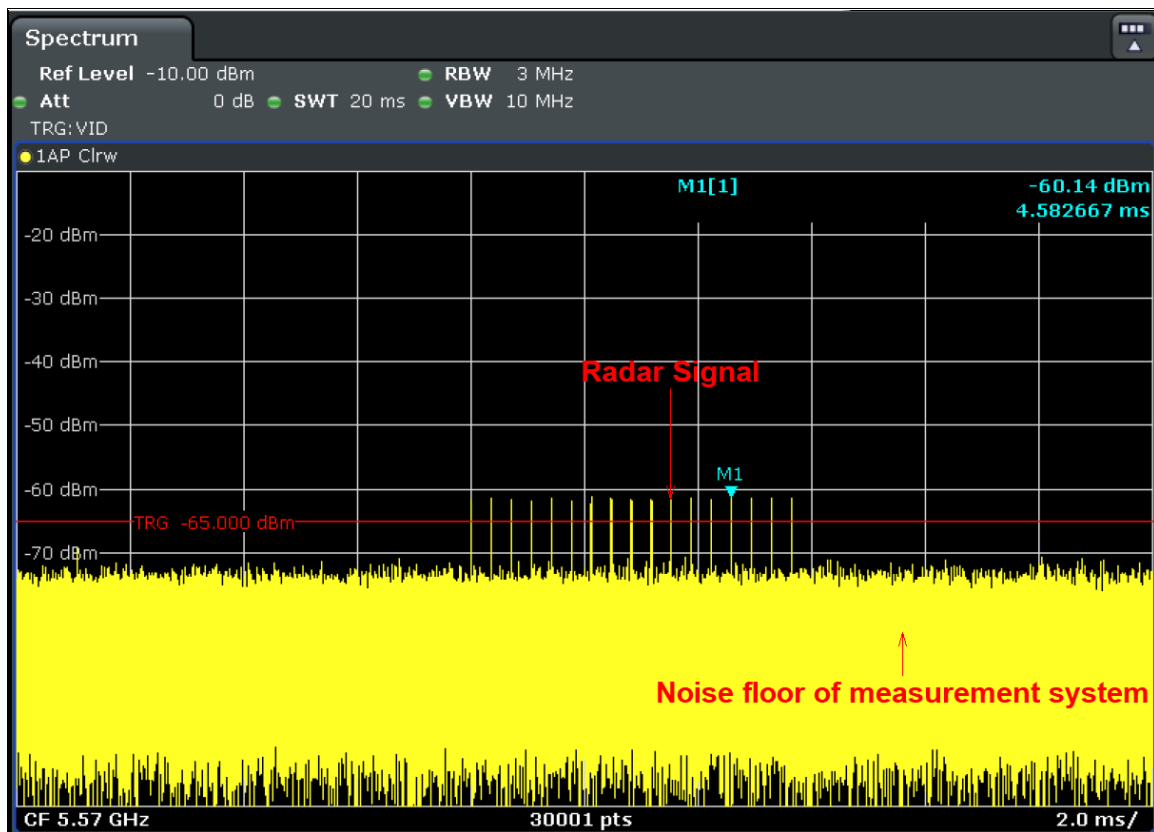


Radar Signal 3

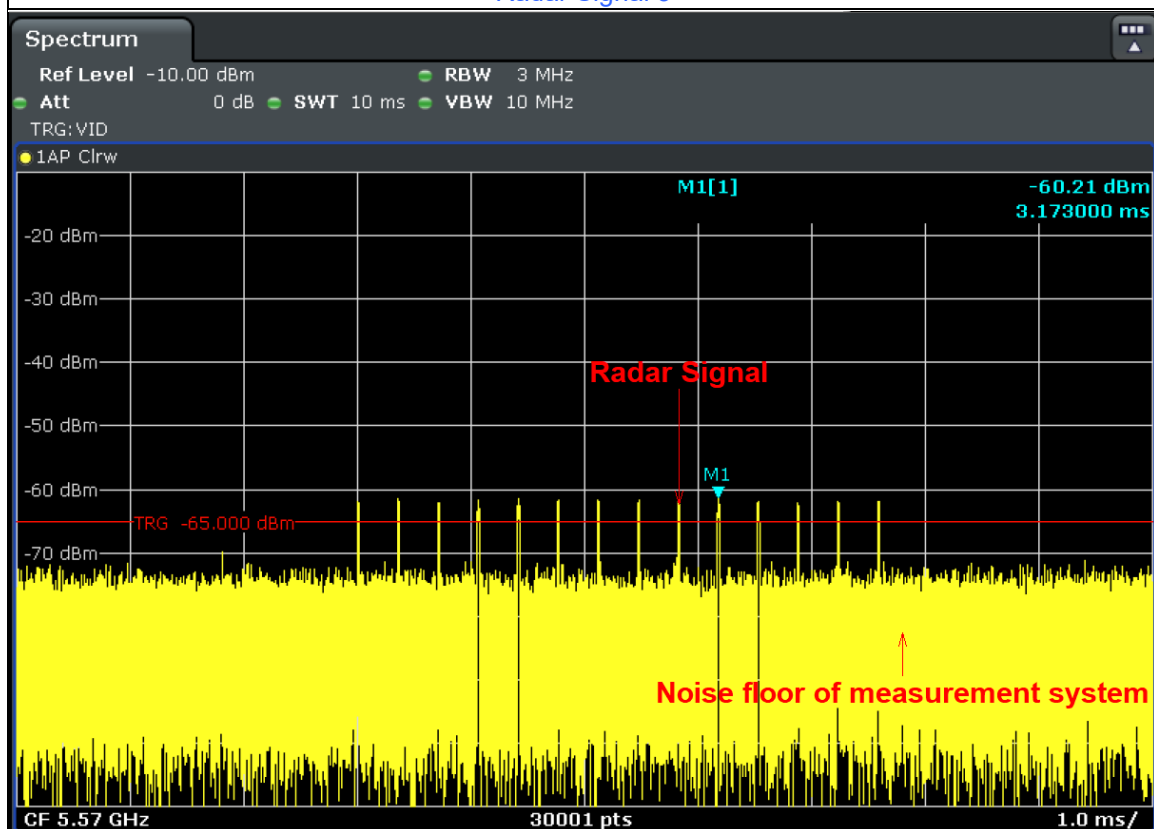


Radar Signal 4

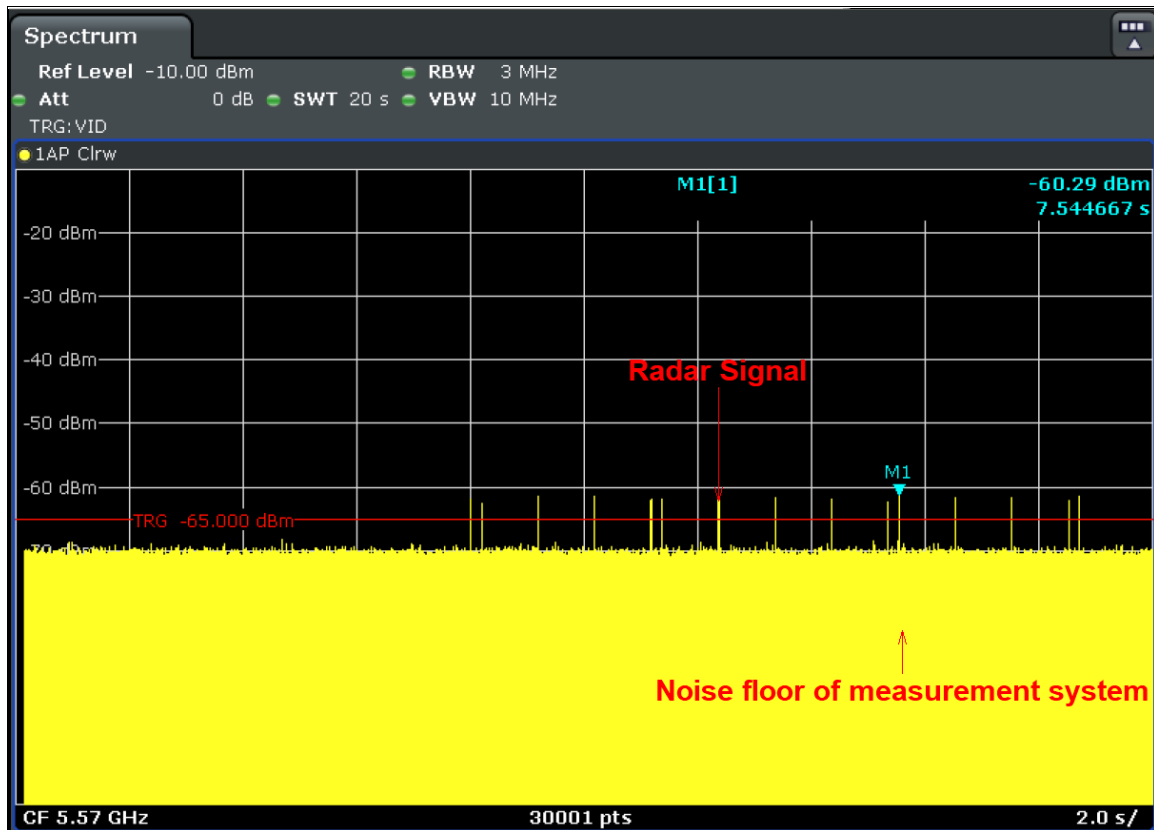

Radar Signal 5

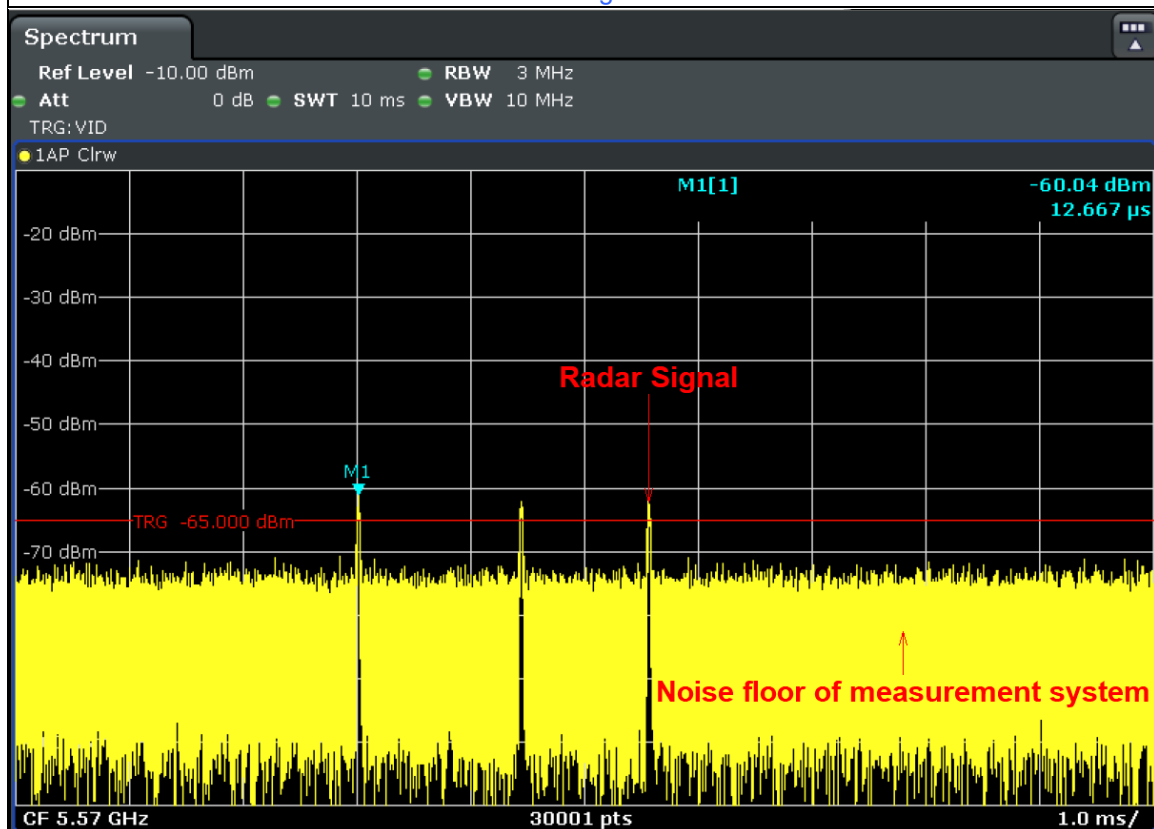

Radar Signal 5 (Single Burst)

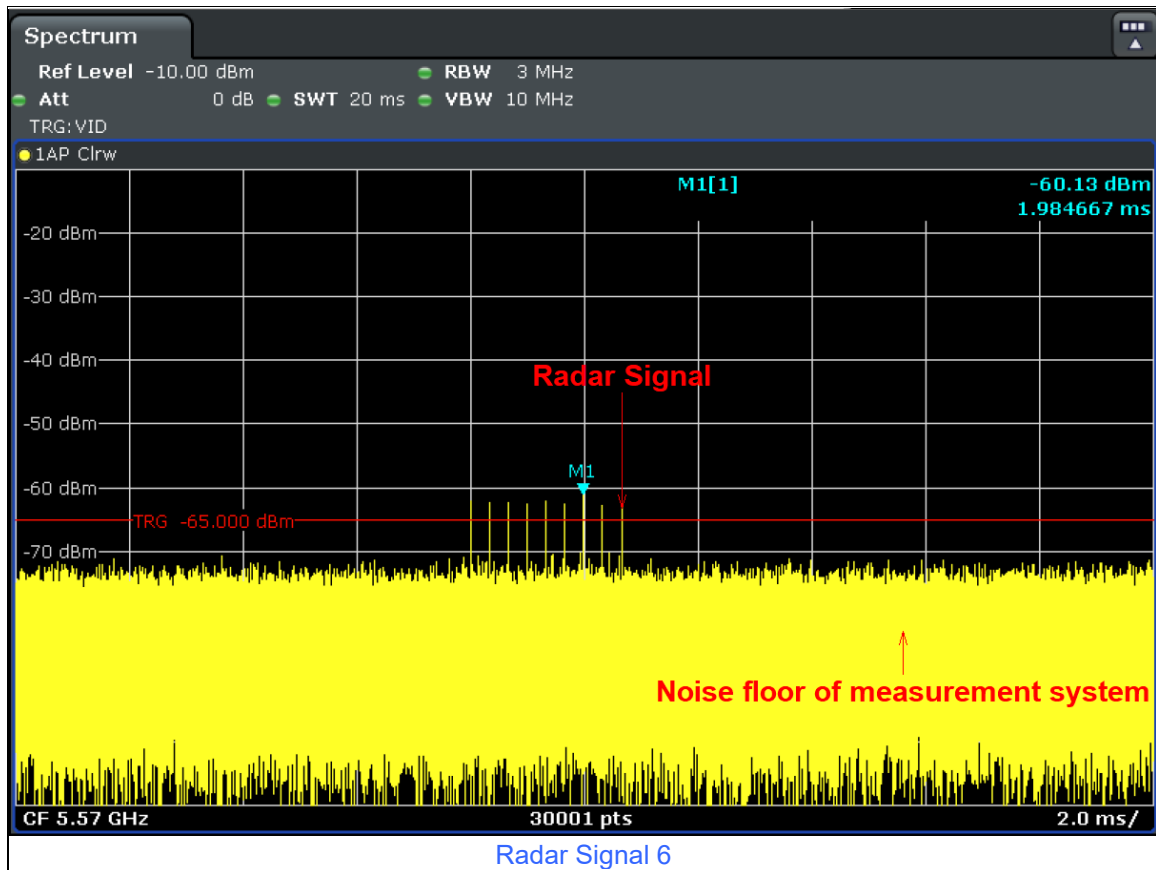

6.2.4 DFS Companion Device

Companion Device Information				
Product	Brand	Model No.	FCC ID	Software/Firmware Version
Intel(R) Wi-Fi 7 BE200 320MHz	Intel	BE200	PD9BE200D2	23.50.0.6


7 Test Results of Test Item

7.1 U-NII Detection Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

For 802.11be (EHT20)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5500 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 18.1 MHz Detection bandwidth (5510 MHz (FH) – 5490 MHz (FL)): 20 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Percentage of Successful Detection	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

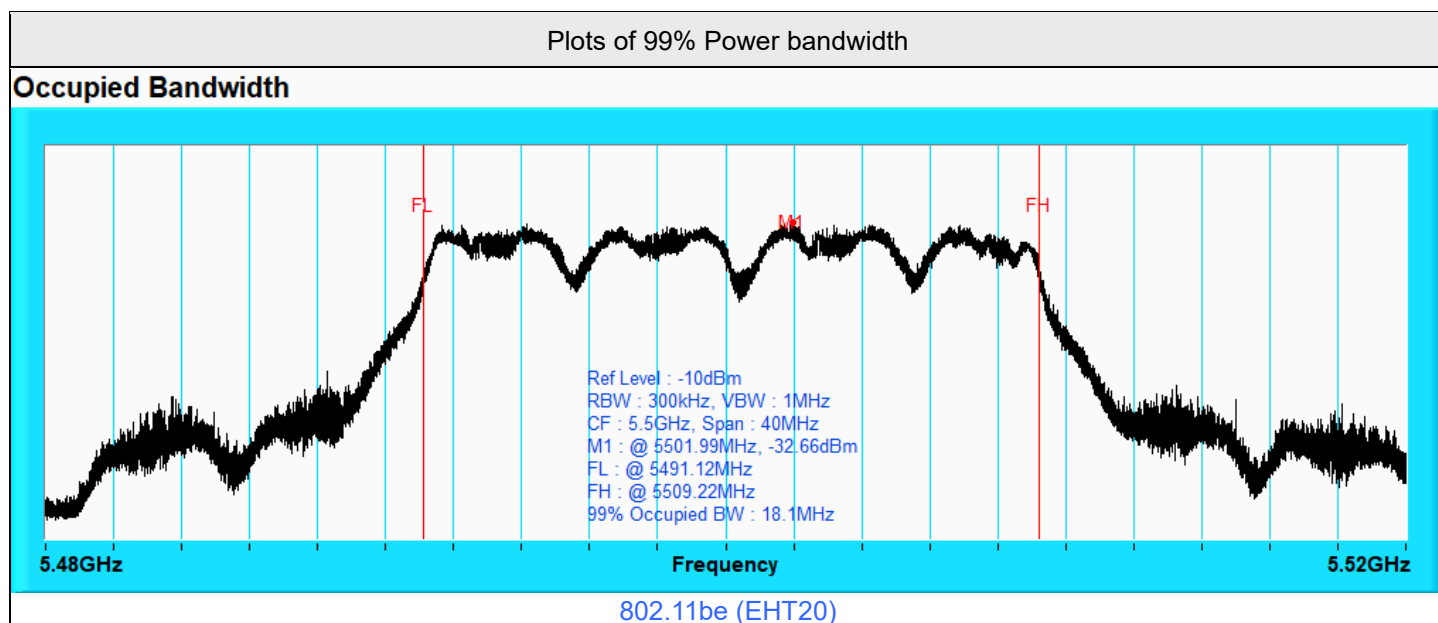

802.11be (EHT40)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5510 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 36.9 MHz

Detection bandwidth (5529 MHz (FH) – 5491 MHz (FL)): 38 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5491 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5529 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

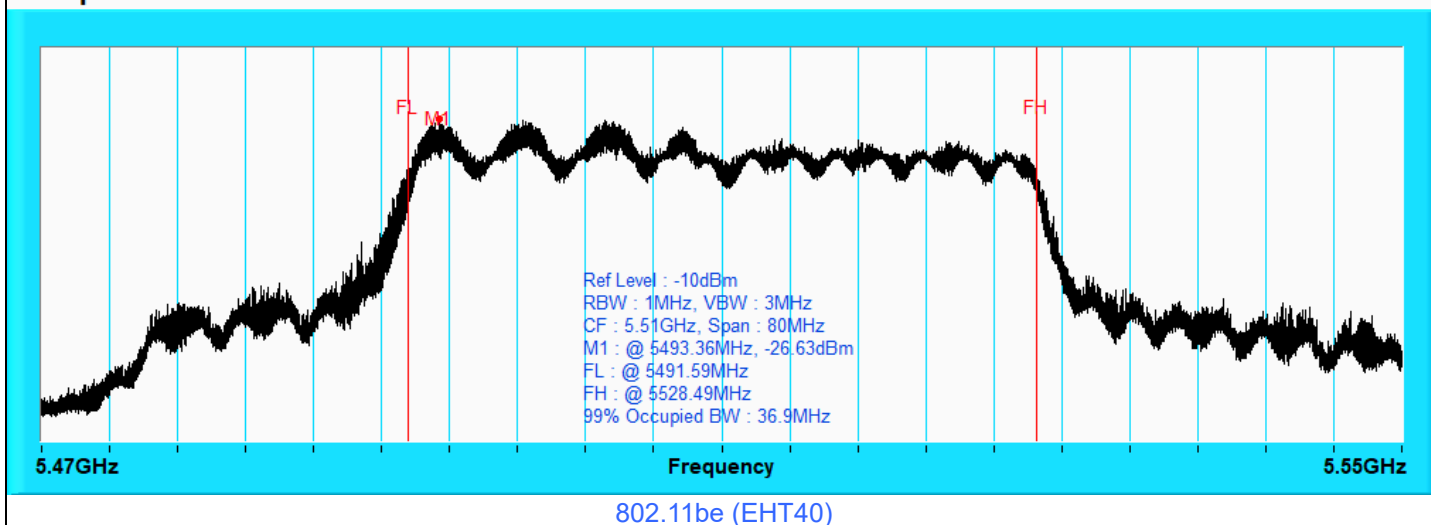

802.11be (EHT80)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5530 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 76.4 MHz

Detection bandwidth (5569 MHz (FH) – 5491 MHz (FL)): 78 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5491 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5569 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

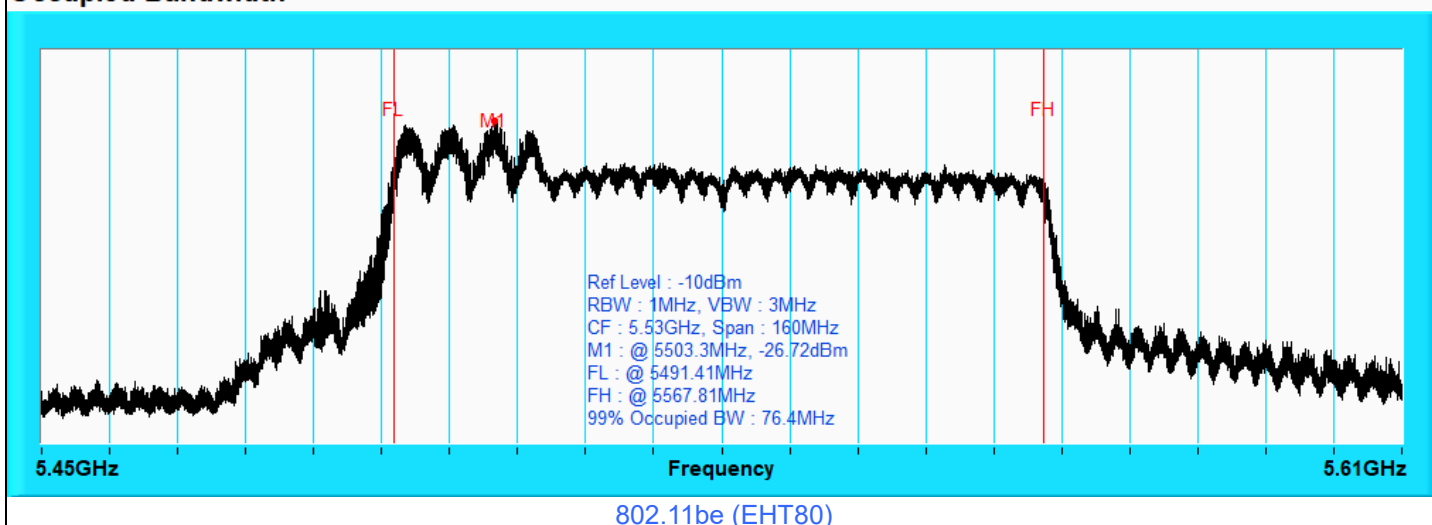

802.11be (EHT160) CH50

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5250 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 156.17 MHz


Detection bandwidth (5329 MHz (FH) – 5250 MHz (FL)): 79 MHz

(160 MHz channel (5250 MHz) straddle between 5150 ~ 5250 MHz and 5250 ~ 5350 MHz, the DFS ability is necessary in 5250 ~ 5350 MHz, therefore DFS detection bandwidth start from 5250 MHz for 802.11be (EHT160) mode.)

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5250 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5255	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5260	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5265	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5270	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5275	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5280	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5285	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5290	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5295	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5300	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5305	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5310	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5315	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5320	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5325	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5329 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

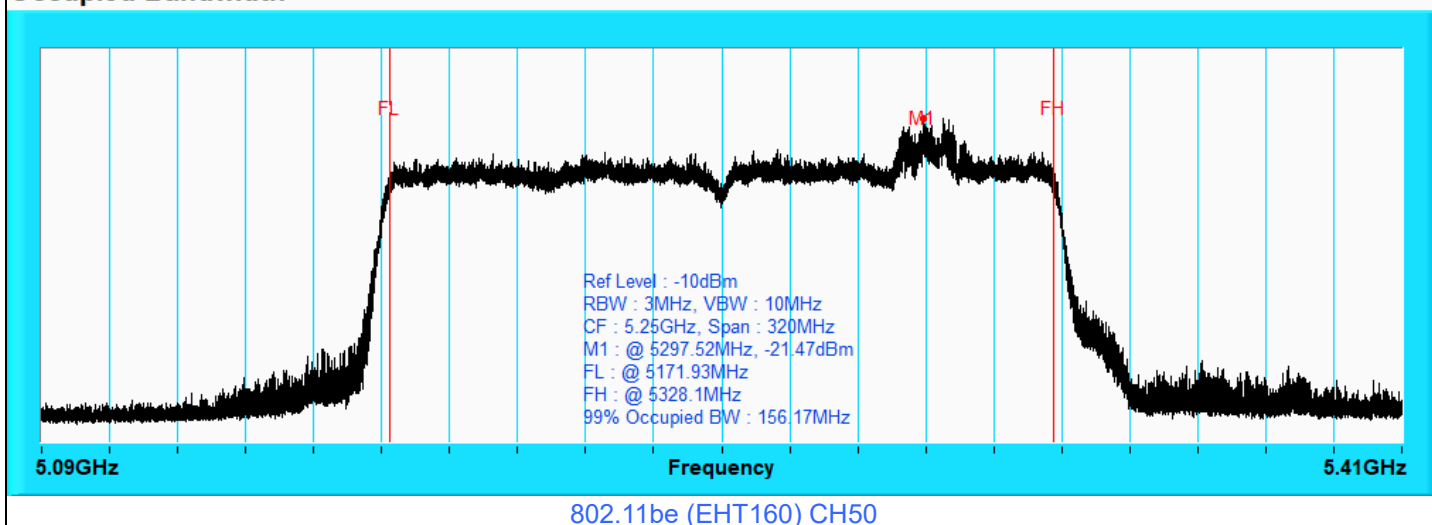

802.11be (EHT160) CH114

Detection Bandwidth Test

Radar Type 0


EUT Frequency: 5570 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 156.82 MHz

Detection bandwidth (5649 MHz (FH) – 5491 MHz (FL)): 158 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5491 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5649 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

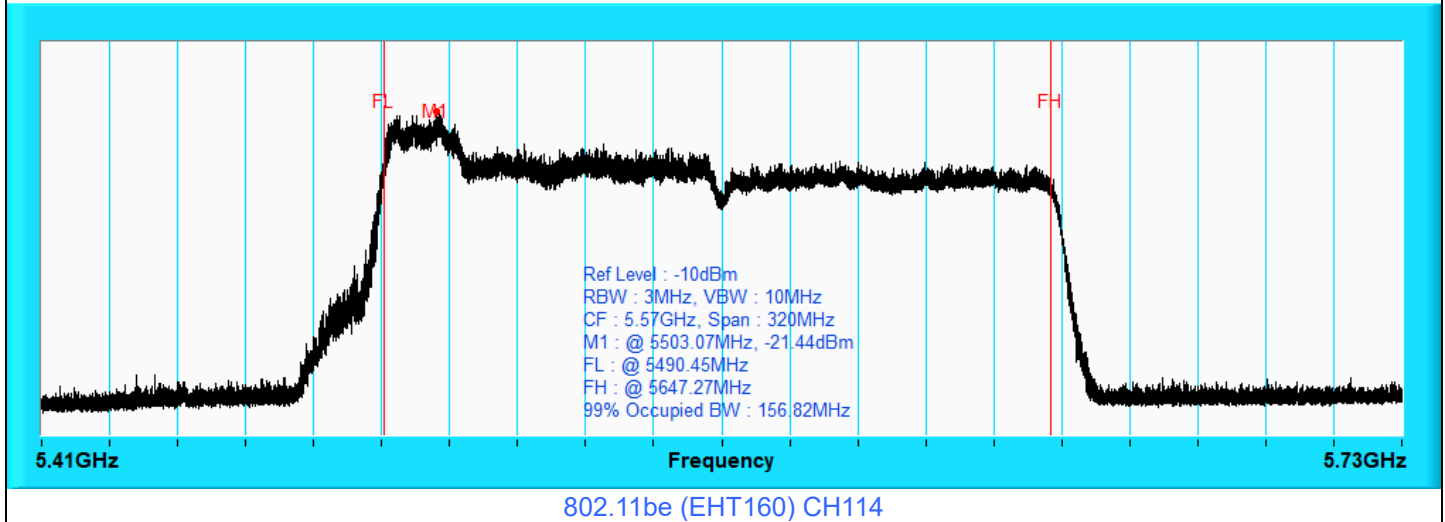Occupied Bandwidth


7.2 Channel Availability Check Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------


If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.

Timing of Radar Signal	Observation	
	EUT	Spectrum Analyzer
Within 0 to 6 seconds	Detected	No transmissions
Within 54 to 60 seconds	Detected	No transmissions

Note: Worst case channel for final "Channel Availability Check" test.

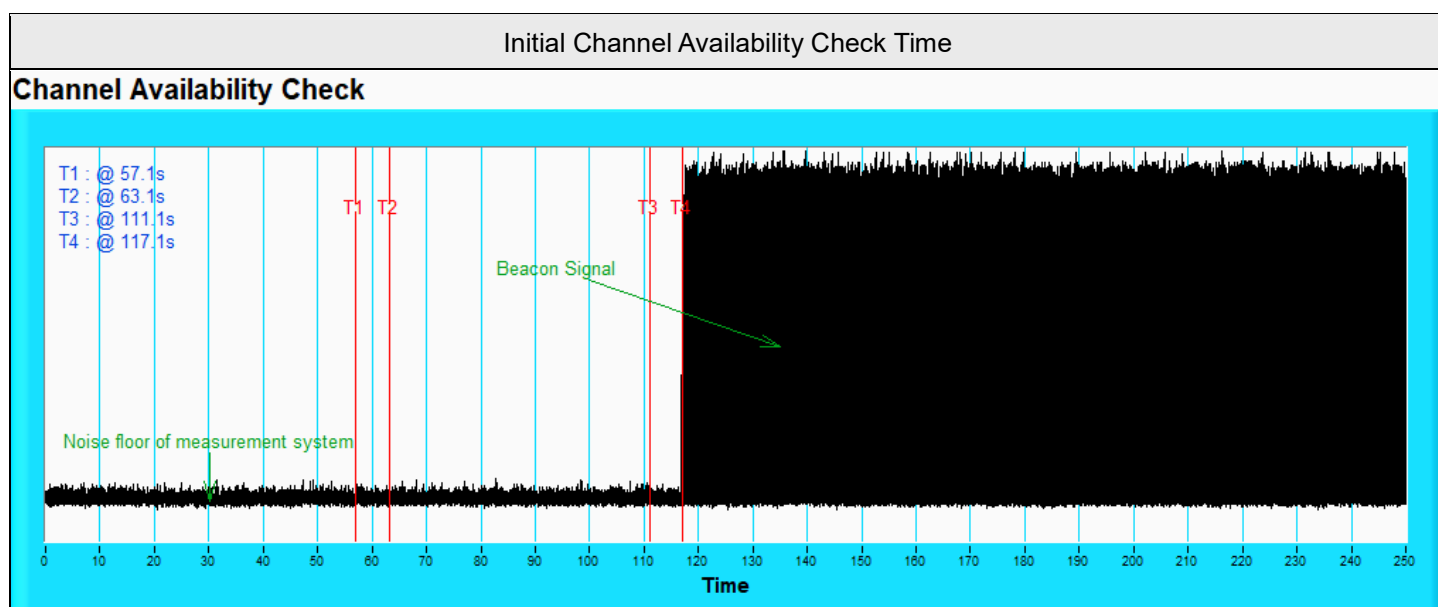


Note: T1 denotes the end of power-up time period is 57.1th second. T4 denotes the end of Channel Availability Check time is 117.1th second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

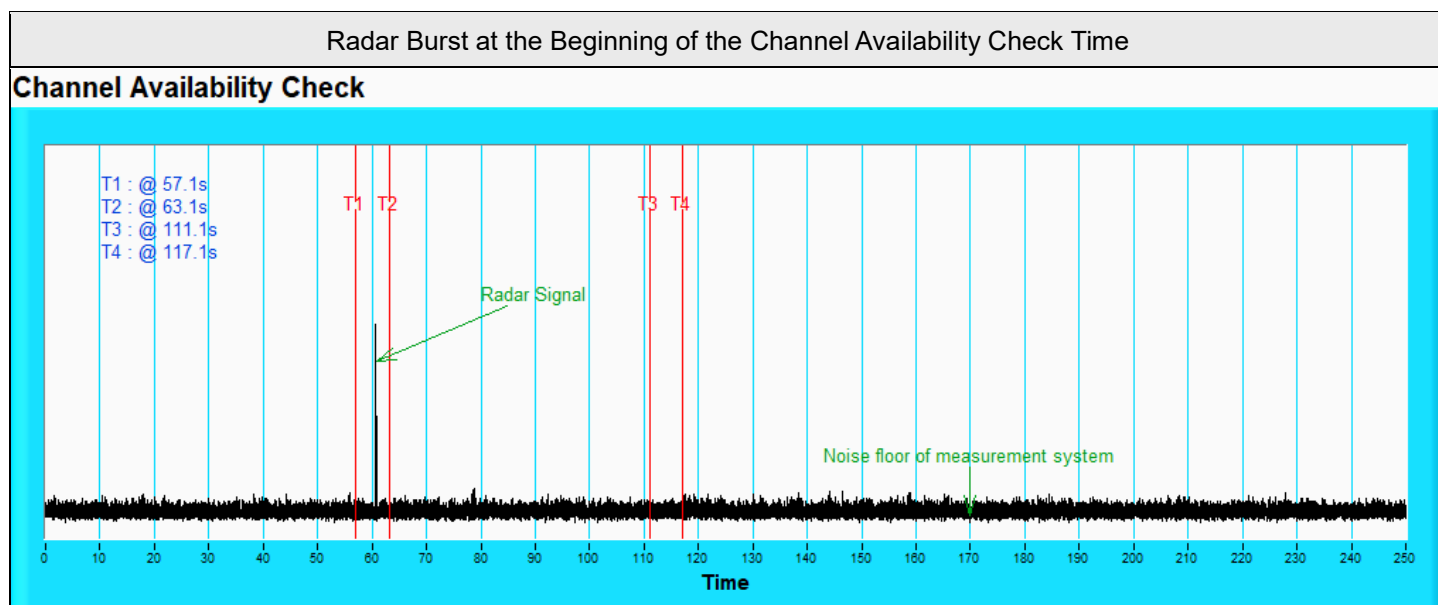

Note: T1 denotes the end of power-up time period is 57.1th second. T2 denotes 63.1th second and the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 117.1th second.

Radar Burst at the End of the Channel Availability Check Time

Channel Availability Check

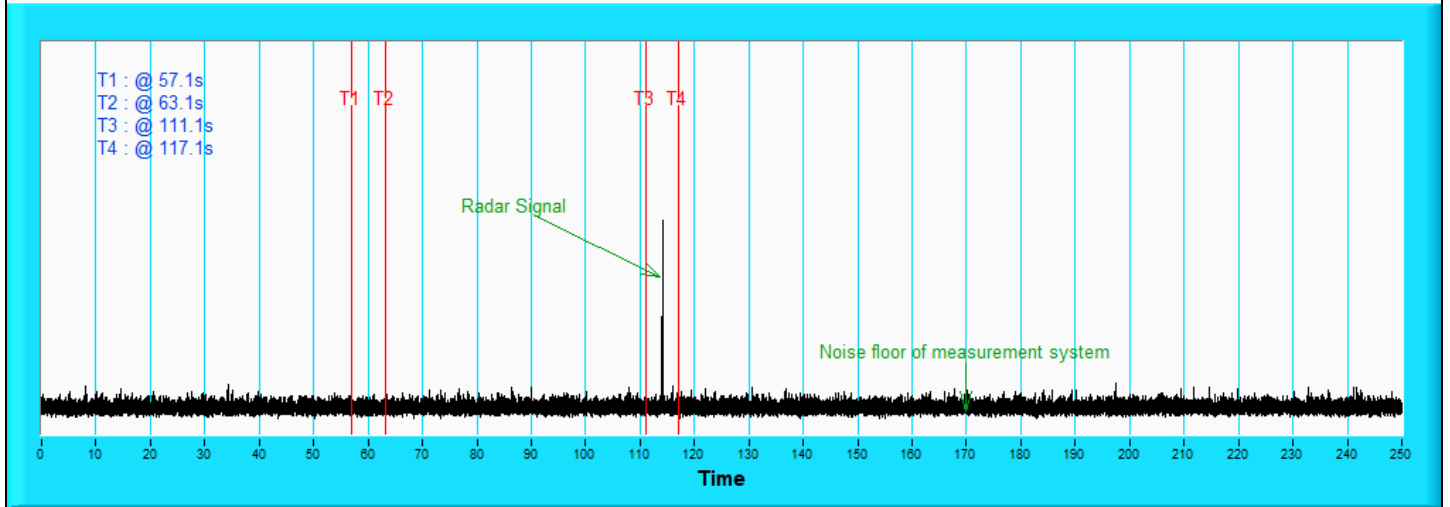


Note: T1 denotes the end of power-up time period is 57.1th second. T3 denotes 111.1th second and the radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence. T4 denotes the 117.1th second.

7.3 Channel Closing Transmission and Channel Move Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------


Radar signal 0

Channel Closing Transmission Time & Channel Move Time

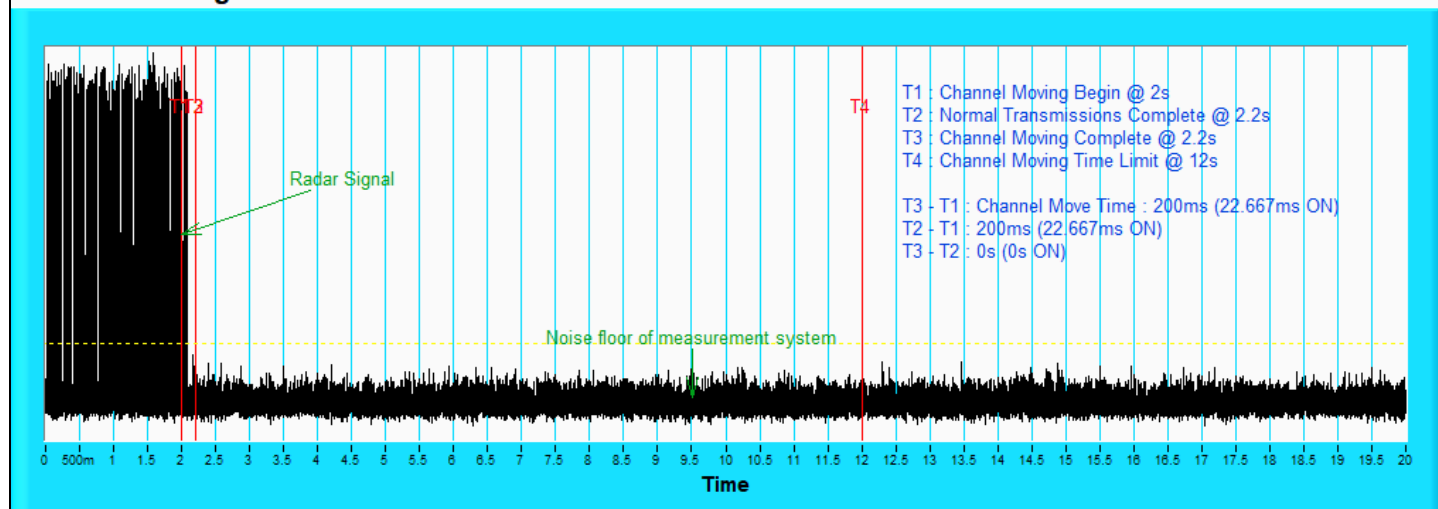

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

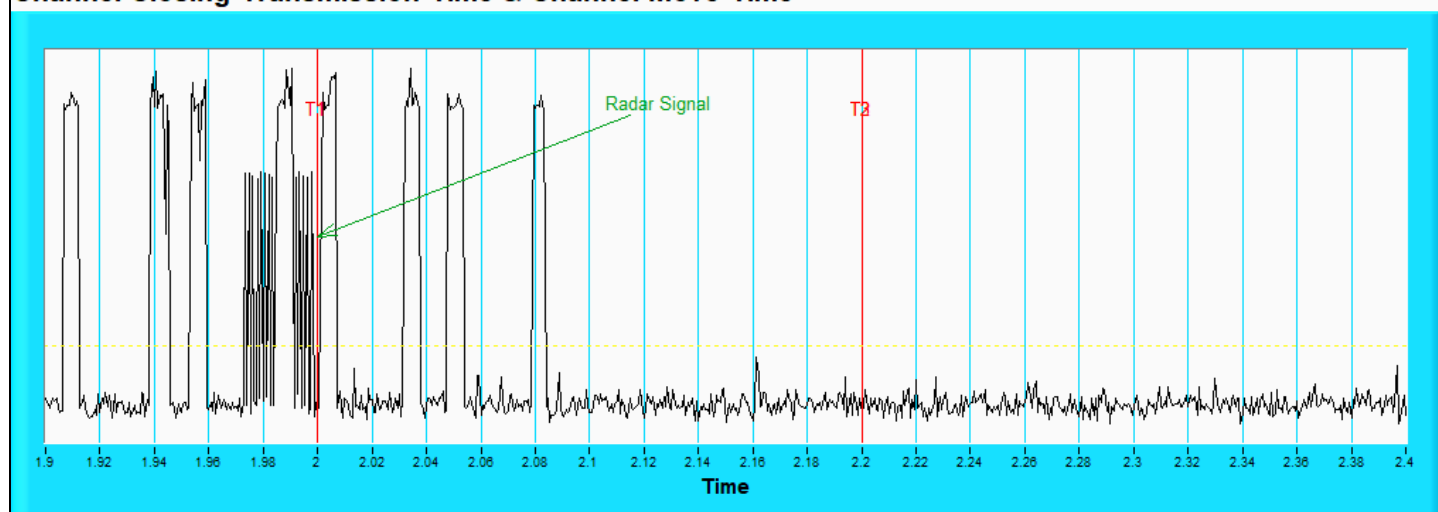

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 1

Channel Closing Transmission Time & Channel Move Time

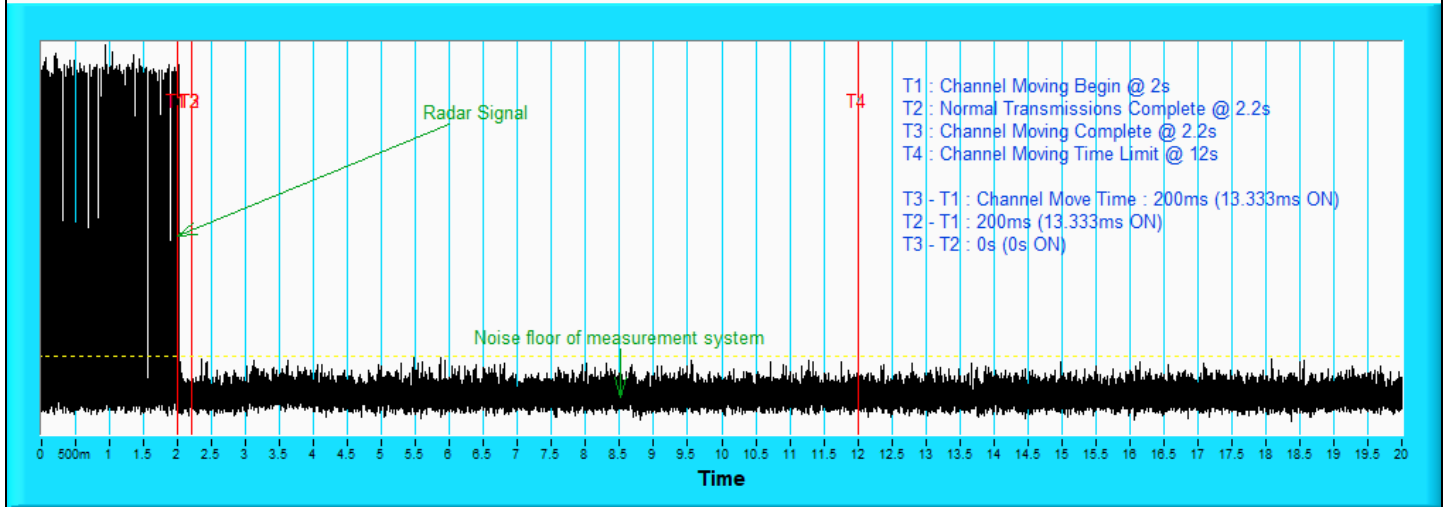

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

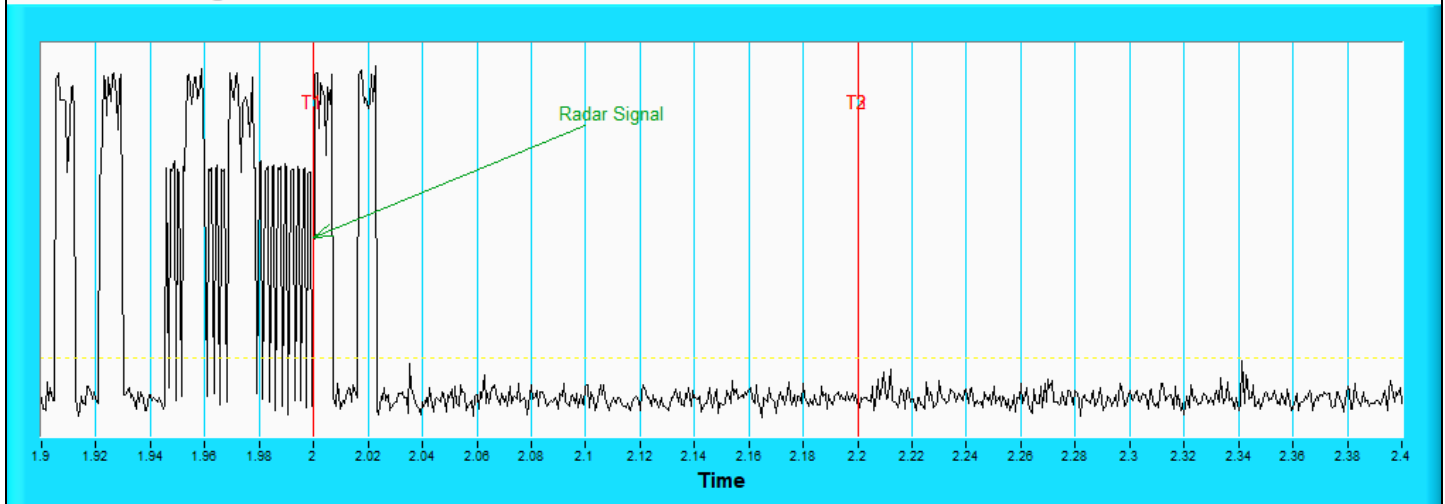

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 2

Channel Closing Transmission Time & Channel Move Time

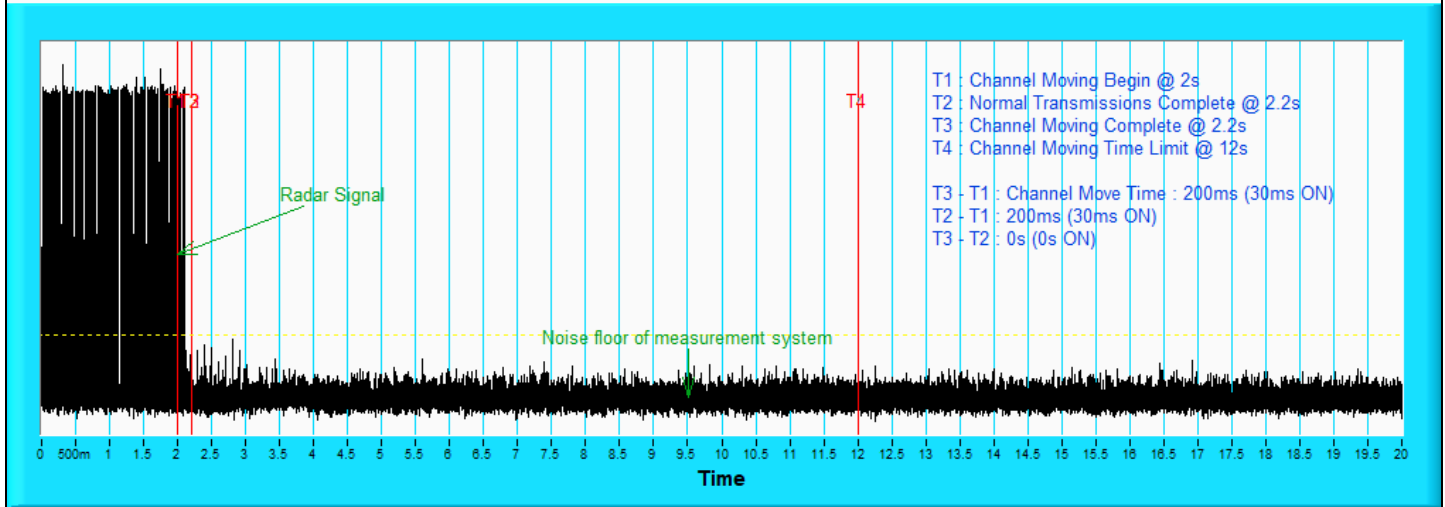

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

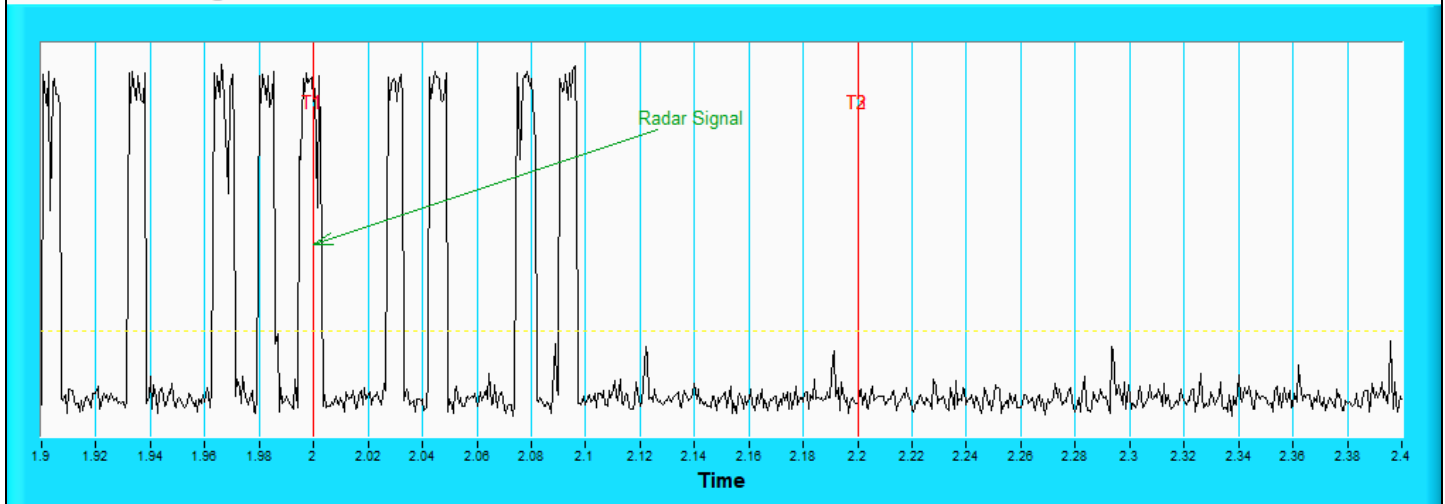

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 3

Channel Closing Transmission Time & Channel Move Time

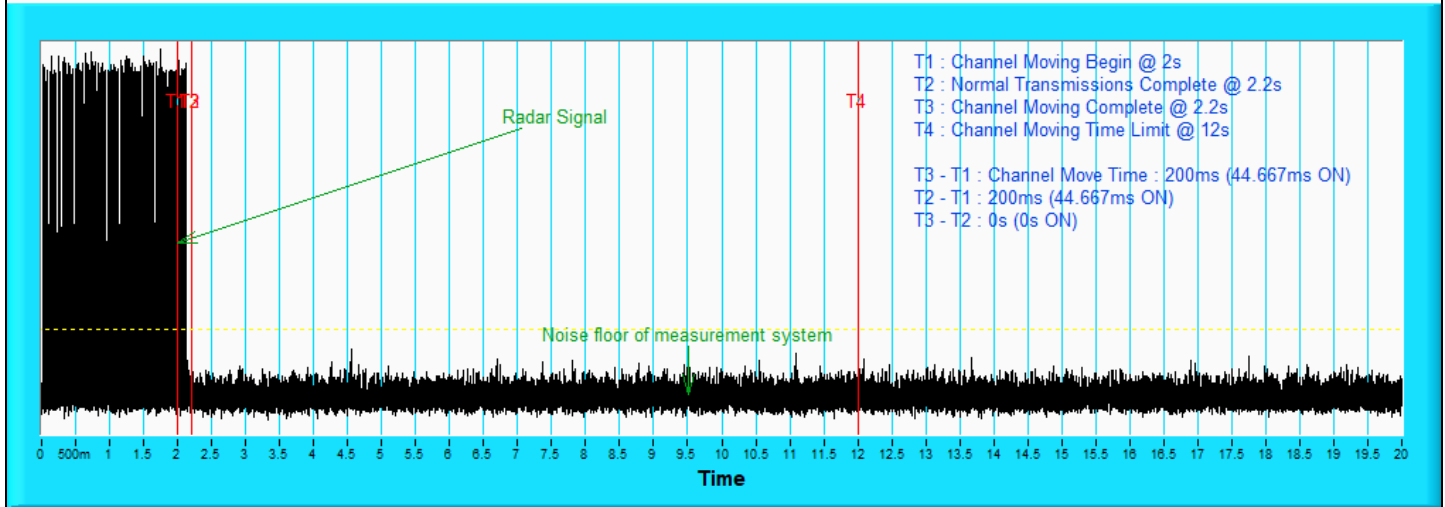

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

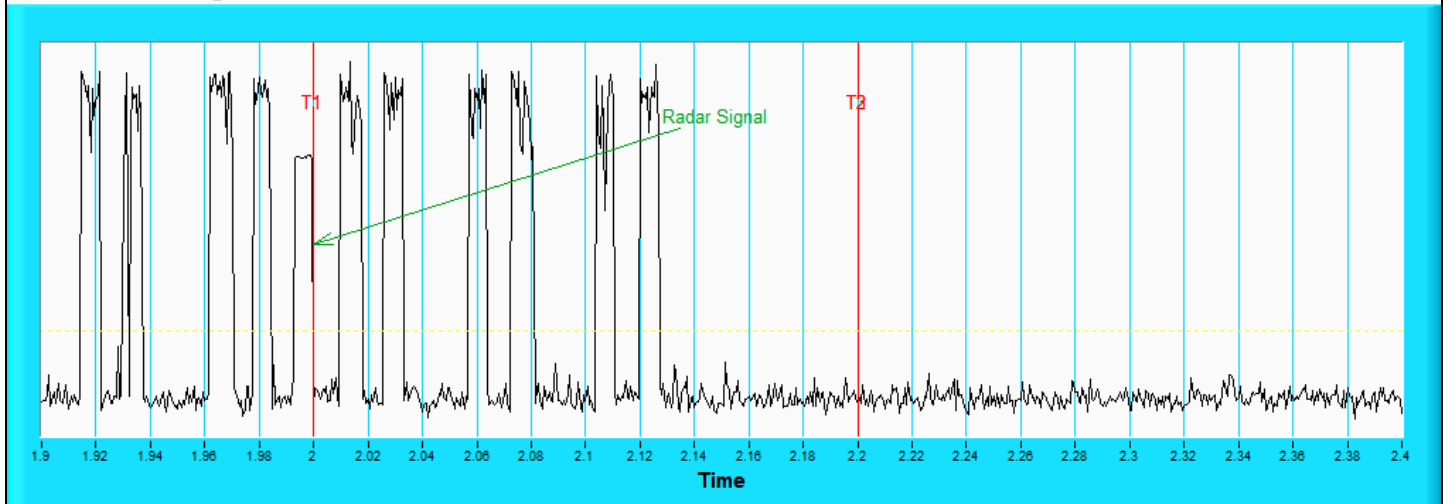

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 4

Channel Closing Transmission Time & Channel Move Time

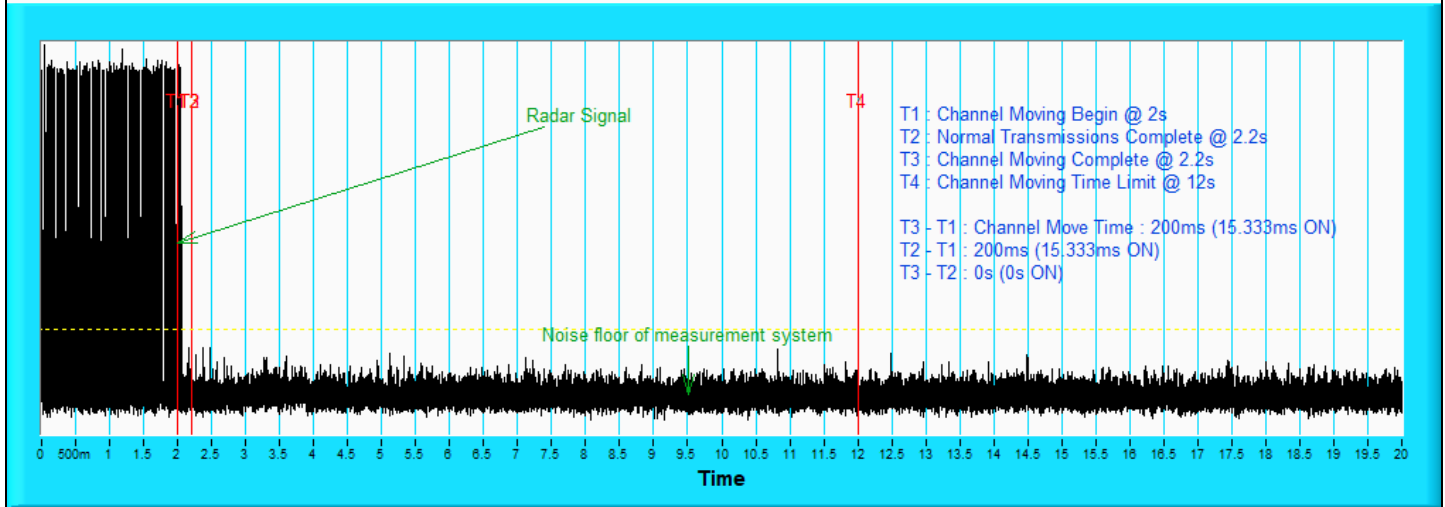

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Channel Closing Transmission Time & Channel Move Time

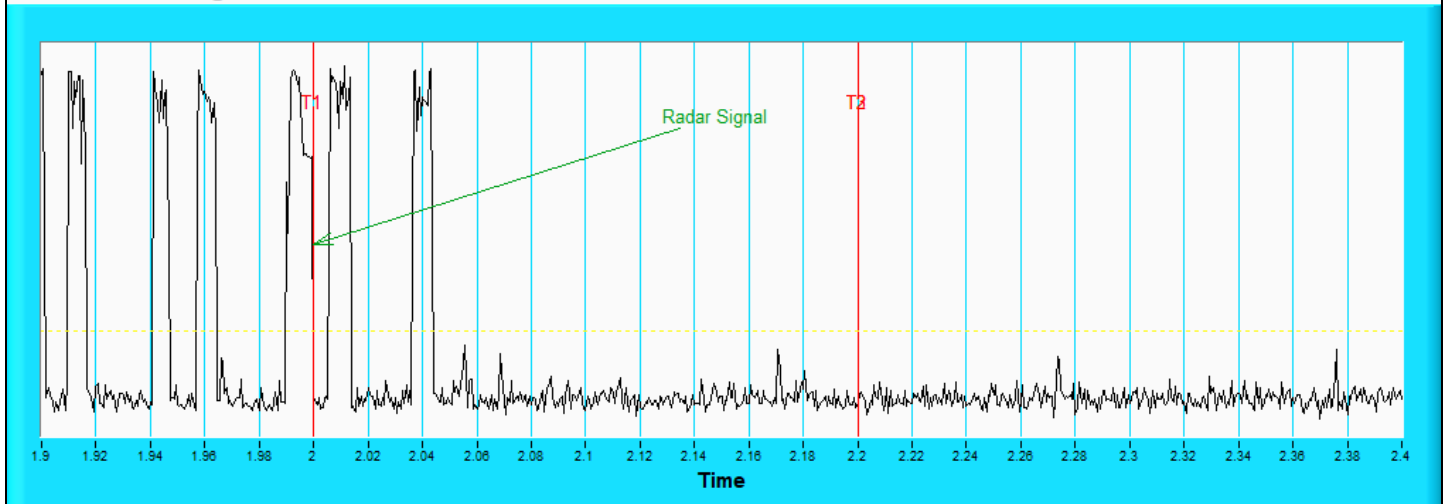


Note: Zoom in of the first 500 ms after radar signal applied.

7.4 Non-Occupancy Period


Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

For Associated Test


1) Test results demonstrating an associated client link is established with the master on a test frequency.

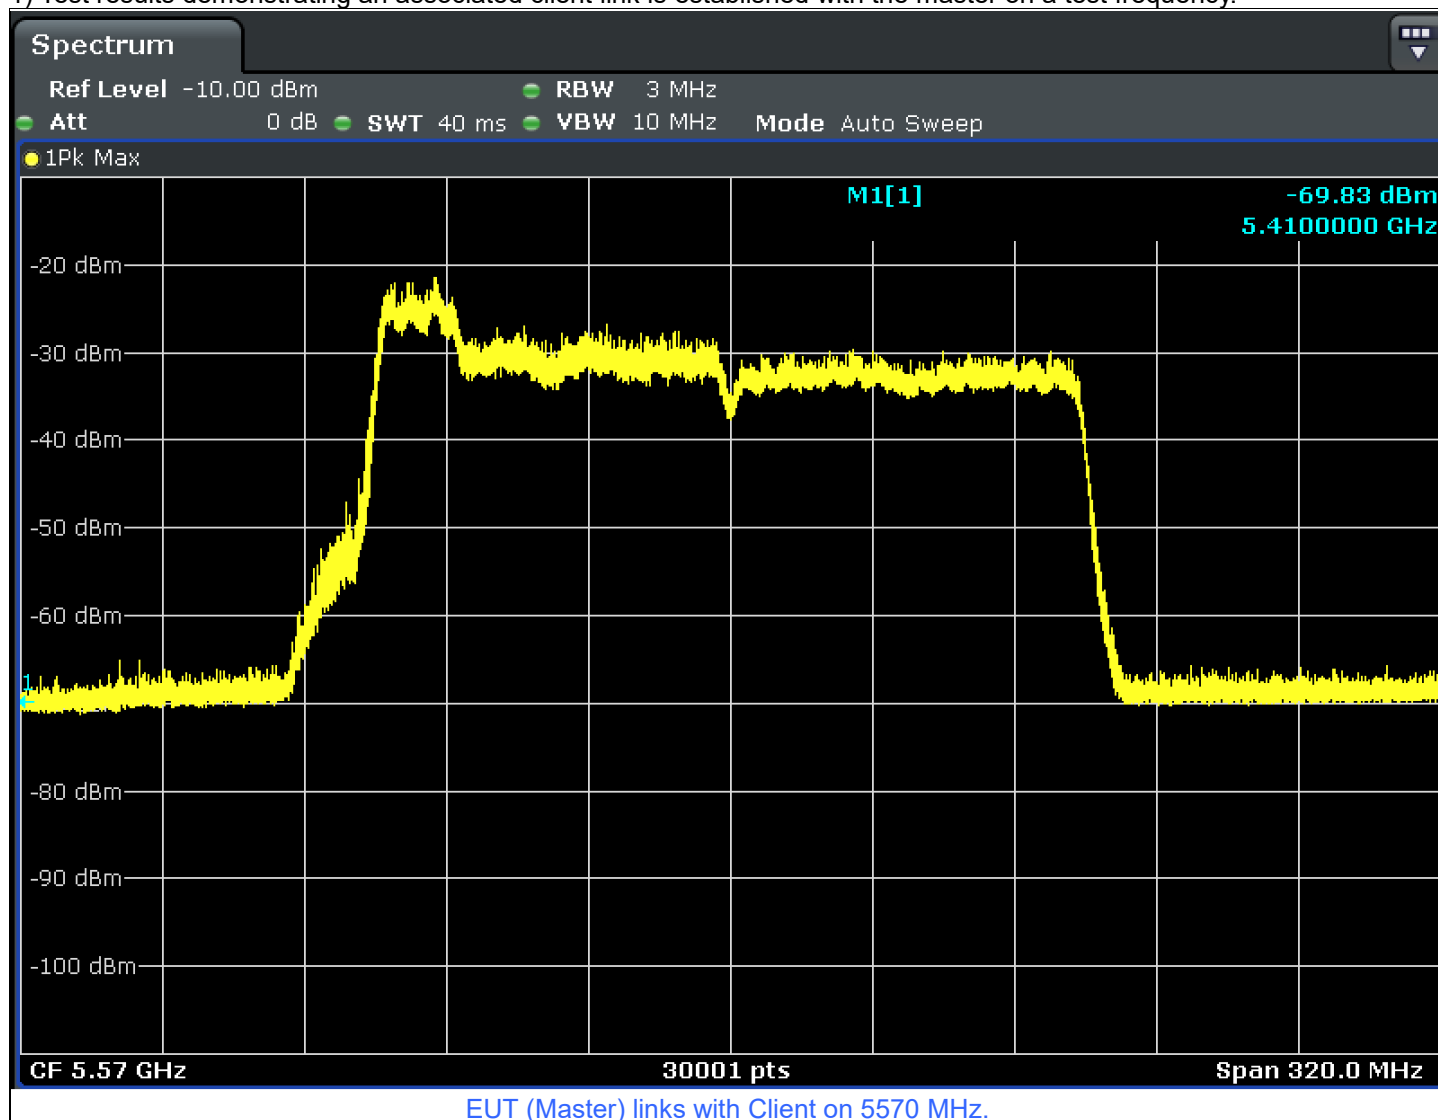


2) The Master and DFS-certified client device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

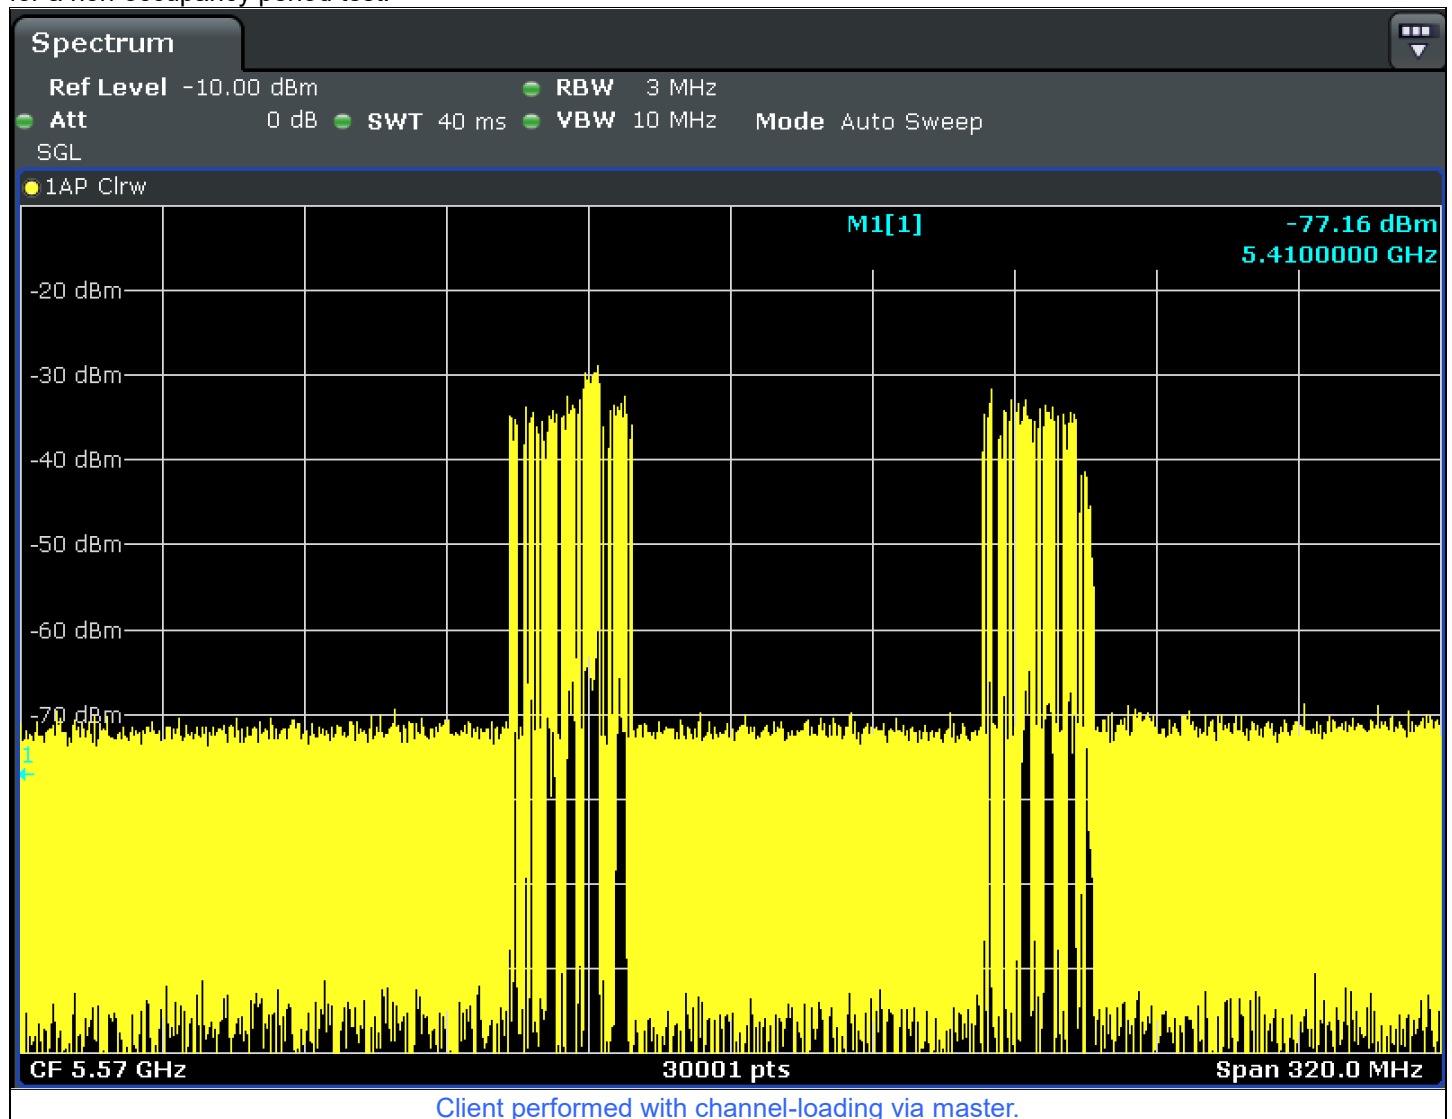

3). The device transmits one type of radar as specified in the DFS Order.

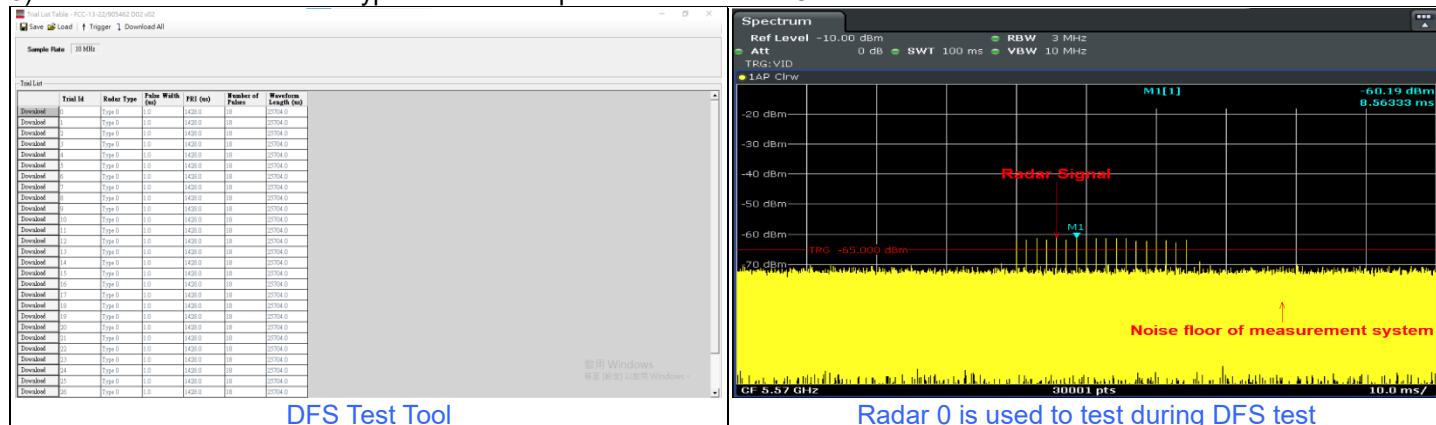

- 4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
 Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
 5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

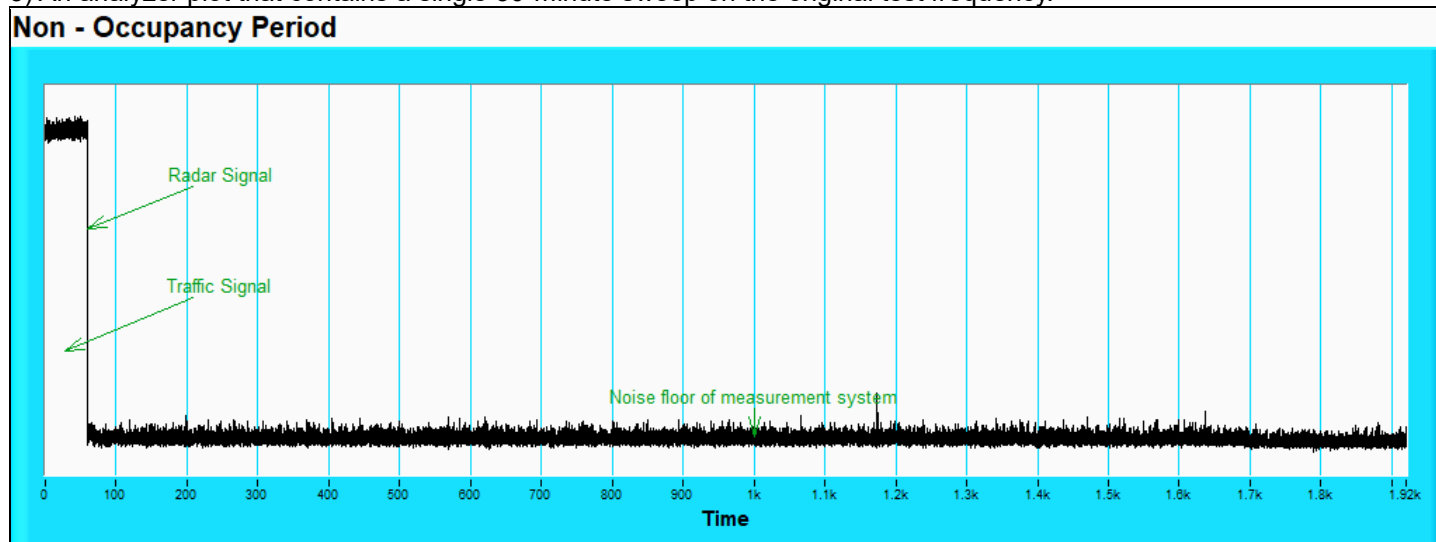

7.5 Statistical Performance Check

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

Radar Type	Number of Trials (Times)	Percentage of Successful Detection					Minimum Percentage of Successful Detection	Test Result
		802.11be (EHT20)	802.11be (EHT40)	802.11be (EHT80)	802.11be (EHT160) CH50	802.11be (EHT160) CH114		
1	30	96.7%	96.7%	96.7%	93.3%	93.3%	60%	Pass
2	30	83.3%	73.3%	80.0%	86.6%	83.3%	60%	Pass
3	30	73.3%	73.3%	86.7%	90.0%	80.0%	60%	Pass
4	30	80.0%	80.0%	73.3%	63.3%	66.7%	60%	Pass
Aggregate (Radar Types 1 - 4)		83.3%	80.8%	84.2%	83.3%	80.8%	80%	Pass
5	30	90.0%	100.0%	80.0%	80.0%	80.0%	80%	Pass
6	30	96.7%	93.3%	96.7%	90.0%	100.0%	70%	Pass

802.11be (EHT20) 5500MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5497	5	1672.2	89	598	Yes
2	5498	23	326.2	18	3066	Yes
3	5493	15	1253.1	67	798	Yes
4	5494	17	1193.3	63	838	Yes
5	5505	9	1474.9	78	678	Yes
6	5495	7	1567.4	83	638	Yes
7	5496	4	1730.1	92	578	Yes
8	5490	16	1222.5	65	818	Yes
9	5507	8	1519.8	81	658	Yes
10	5500	22	1066.1	57	938	Yes
11	5491	6	1618.1	86	618	Yes
12	5501	18	1165.5	62	858	Yes
13	5502	14	1285.3	68	778	Yes
14	5499	10	1432.7	76	698	Yes
15	5504	2	1858.7	99	538	Yes
16	5503	-	416.1	22	2403	Yes
17	5509	-	492.9	27	2029	Yes
18	5508	-	368.2	20	2716	No
19	5492	-	386.2	21	2589	Yes
20	5506	-	394.5	21	2535	Yes
21	5510	-	360.1	20	2777	Yes
22	5500	-	494.1	27	2024	Yes
23	5493	-	897.7	48	1114	Yes
24	5505	-	962.5	51	1039	Yes
25	5497	-	380.2	21	2630	Yes
26	5503	-	452.7	24	2209	Yes
27	5496	-	391.8	21	2552	Yes
28	5490	-	1083.4	58	923	Yes
29	5495	-	329.7	18	3033	Yes
30	5504	-	502	27	1992	Yes
						Detection Rate: 96.7%

802.11be (EHT20) 5500MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	24	2	224	Yes
2	5497	29	4.5	219	Yes
3	5509	26	3.2	167	Yes
4	5499	27	3.7	216	No
5	5503	23	1.1	179	Yes
6	5507	26	3.1	181	Yes
7	5496	27	3.7	188	Yes
8	5510	26	2.9	155	No
9	5498	29	4.8	214	Yes
10	5494	23	1.5	195	Yes
11	5504	29	4.9	201	Yes
12	5495	24	1.8	197	No
13	5492	23	1.5	158	Yes
14	5493	29	4.9	222	Yes
15	5500	28	4.2	185	Yes
16	5508	23	1	173	Yes
17	5501	29	4.8	190	No
18	5505	29	4.5	200	Yes
19	5491	25	2.3	165	Yes
20	5506	27	3.4	177	Yes
21	5502	23	1	183	Yes
22	5490	28	4	156	No
23	5509	23	1.1	213	Yes
24	5507	25	2.7	229	Yes
25	5510	23	1.2	206	Yes
26	5506	29	4.9	203	Yes
27	5499	26	3.3	163	Yes
28	5498	26	3.2	182	Yes
29	5491	24	1.7	166	Yes
30	5502	25	2.6	210	Yes
					Detection Rate: 83.3%

802.11be (EHT20) 5500MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5503	16	7	239	Yes
2	5505	18	9.5	335	Yes
3	5496	17	8.2	411	Yes
4	5495	18	8.7	224	Yes
5	5506	16	6.1	428	No
6	5508	17	8.1	332	Yes
7	5494	17	8.7	491	Yes
8	5497	17	7.9	348	No
9	5498	18	9.8	206	Yes
10	5510	16	6.5	204	No
11	5500	18	9.9	438	Yes
12	5504	16	6.8	484	Yes
13	5502	16	6.5	344	No
14	5509	18	9.9	465	Yes
15	5490	18	9.2	444	No
16	5501	16	6	357	Yes
17	5491	18	9.8	423	Yes
18	5507	18	9.5	225	No
19	5499	16	7.3	217	Yes
20	5493	17	8.4	242	Yes
21	5492	16	6	483	Yes
22	5496	18	9	470	Yes
23	5494	16	6.1	308	Yes
24	5491	17	7.7	498	Yes
25	5510	16	6.2	477	No
26	5503	18	9.9	375	Yes
27	5507	17	8.3	285	Yes
28	5499	17	8.2	433	No
29	5502	16	6.7	490	Yes
30	5493	17	7.6	202	Yes
					Detection Rate: 73.3%

802.11be (EHT20) 5500MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5495	14	16	355	Yes
2	5500	12	11.3	487	No
3	5493	13	13.5	344	Yes
4	5490	16	19.4	288	No
5	5501	15	17.5	230	Yes
6	5507	14	15.3	432	Yes
7	5503	14	15.9	207	Yes
8	5497	13	14.3	443	Yes
9	5496	14	15.8	439	Yes
10	5502	12	11.5	223	Yes
11	5506	15	17.4	208	Yes
12	5494	16	19	463	No
13	5505	14	16	441	Yes
14	5504	13	13.8	323	Yes
15	5498	16	18.9	297	Yes
16	5492	14	15.5	412	Yes
17	5510	16	19.9	324	No
18	5509	13	14.1	271	Yes
19	5491	14	15.2	349	Yes
20	5499	13	13.8	409	Yes
21	5508	15	17.1	373	Yes
22	5497	13	13.8	254	Yes
23	5496	16	19.8	274	No
24	5505	14	15.3	278	Yes
25	5492	13	14.5	317	Yes
26	5507	12	11.3	260	Yes
27	5500	15	17.3	211	Yes
28	5503	16	19.2	272	Yes
29	5493	13	14.2	264	No
30	5491	15	18.2	284	Yes
					Detection Rate: 80%

802.11be (EHT20) 5500MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5500	LP_SIGNAL_01	Yes
2	18	5500	LP_SIGNAL_02	Yes
3	13	5500	LP_SIGNAL_03	Yes
4	15	5500	LP_SIGNAL_04	Yes
5	5	5500	LP_SIGNAL_05	Yes
6	13	5500	LP_SIGNAL_06	Yes
7	15	5500	LP_SIGNAL_07	Yes
8	12	5500	LP_SIGNAL_08	Yes
9	20	5500	LP_SIGNAL_09	Yes
10	6	5500	LP_SIGNAL_10	No
11	20	5498	LP_SIGNAL_11	Yes
12	8	5493.2	LP_SIGNAL_12	Yes
13	7	5492.8	LP_SIGNAL_13	Yes
14	20	5498	LP_SIGNAL_14	Yes
15	17	5496.8	LP_SIGNAL_15	Yes
16	5	5492	LP_SIGNAL_16	Yes
17	20	5498	LP_SIGNAL_17	Yes
18	19	5497.6	LP_SIGNAL_18	Yes
19	10	5494	LP_SIGNAL_19	Yes
20	14	5495.6	LP_SIGNAL_20	No
21	5	5508	LP_SIGNAL_21	Yes
22	16	5503.6	LP_SIGNAL_22	Yes
23	5	5508	LP_SIGNAL_23	Yes
24	11	5505.6	LP_SIGNAL_24	Yes
25	5	5508	LP_SIGNAL_25	No
26	20	5502	LP_SIGNAL_26	Yes
27	14	5504.4	LP_SIGNAL_27	Yes
28	13	5504.8	LP_SIGNAL_28	Yes
29	7	5507.2	LP_SIGNAL_29	Yes
30	11	5505.6	LP_SIGNAL_30	Yes
				Detection Rate: 90%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT20) 5500MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	No
				Detection Rate: 96.7%

802.11be (EHT40) 5510MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5528	5	1672.2	89	598	Yes
2	5502	23	326.2	18	3066	Yes
3	5520	15	1253.1	67	798	Yes
4	5516	17	1193.3	63	838	Yes
5	5525	9	1474.9	78	678	Yes
6	5496	7	1567.4	83	638	Yes
7	5497	4	1730.1	92	578	Yes
8	5515	16	1222.5	65	818	Yes
9	5514	8	1519.8	81	658	Yes
10	5505	22	1066.1	57	938	Yes
11	5492	6	1618.1	86	618	Yes
12	5509	18	1165.5	62	858	Yes
13	5503	14	1285.3	68	778	Yes
14	5511	10	1432.7	76	698	Yes
15	5506	2	1858.7	99	538	Yes
16	5494	-	416.1	22	2403	Yes
17	5507	-	492.9	27	2029	Yes
18	5493	-	368.2	20	2716	Yes
19	5491	-	386.2	21	2589	Yes
20	5524	-	394.5	21	2535	Yes
21	5498	-	360.1	20	2777	No
22	5499	-	494.1	27	2024	Yes
23	5513	-	897.7	48	1114	Yes
24	5523	-	962.5	51	1039	Yes
25	5504	-	380.2	21	2630	Yes
26	5508	-	452.7	24	2209	Yes
27	5526	-	391.8	21	2552	Yes
28	5527	-	1083.4	58	923	Yes
29	5501	-	329.7	18	3033	Yes
30	5495	-	502	27	1992	Yes
						Detection Rate: 96.7%

802.11be (EHT40) 5510MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5519	24	2	224	Yes
2	5524	29	4.5	219	Yes
3	5503	26	3.2	167	Yes
4	5510	27	3.7	216	Yes
5	5516	23	1.1	179	No
6	5496	26	3.1	181	Yes
7	5498	27	3.7	188	No
8	5491	26	2.9	155	Yes
9	5512	29	4.8	214	Yes
10	5513	23	1.5	195	No
11	5522	29	4.9	201	Yes
12	5502	24	1.8	197	Yes
13	5526	23	1.5	158	Yes
14	5521	29	4.9	222	No
15	5506	28	4.2	185	Yes
16	5501	23	1	173	Yes
17	5514	29	4.8	190	Yes
18	5492	29	4.5	200	Yes
19	5508	25	2.3	165	Yes
20	5493	27	3.4	177	No
21	5511	23	1	183	No
22	5497	28	4	156	Yes
23	5520	23	1.1	213	Yes
24	5525	25	2.7	229	Yes
25	5517	23	1.2	206	No
26	5499	29	4.9	203	Yes
27	5527	26	3.3	163	Yes
28	5518	26	3.2	182	Yes
29	5504	24	1.7	166	Yes
30	5509	25	2.6	210	No
					Detection Rate: 73.3%

802.11be (EHT40) 5510MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5497	16	7	239	Yes
2	5499	18	9.5	335	Yes
3	5493	17	8.2	411	No
4	5492	18	8.7	224	Yes
5	5514	16	6.1	428	Yes
6	5491	17	8.1	332	No
7	5523	17	8.7	491	Yes
8	5513	17	7.9	348	Yes
9	5504	18	9.8	206	Yes
10	5521	16	6.5	204	Yes
11	5501	18	9.9	438	Yes
12	5515	16	6.8	484	No
13	5496	16	6.5	344	Yes
14	5509	18	9.9	465	Yes
15	5494	18	9.2	444	No
16	5506	16	6	357	Yes
17	5529	18	9.8	423	Yes
18	5520	18	9.5	225	Yes
19	5505	16	7.3	217	No
20	5510	17	8.4	242	No
21	5511	16	6	483	Yes
22	5524	18	9	470	Yes
23	5516	16	6.1	308	Yes
24	5502	17	7.7	498	Yes
25	5498	16	6.2	477	Yes
26	5500	18	9.9	375	No
27	5507	17	8.3	285	Yes
28	5518	17	8.2	433	Yes
29	5503	16	6.7	490	No
30	5526	17	7.6	202	Yes
					Detection Rate: 73.3%

802.11be (EHT40) 5510MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5502	14	16	355	No
2	5513	12	11.3	487	Yes
3	5493	13	13.5	344	Yes
4	5516	16	19.4	288	No
5	5508	15	17.5	230	Yes
6	5510	14	15.3	432	Yes
7	5497	14	15.9	207	Yes
8	5524	13	14.3	443	Yes
9	5491	14	15.8	439	Yes
10	5526	12	11.5	223	No
11	5520	15	17.4	208	No
12	5521	16	19	463	No
13	5529	14	16	441	Yes
14	5498	13	13.8	323	Yes
15	5519	16	18.9	297	Yes
16	5499	14	15.5	412	Yes
17	5509	16	19.9	324	Yes
18	5501	13	14.1	271	Yes
19	5525	14	15.2	349	Yes
20	5528	13	13.8	409	Yes
21	5511	15	17.1	373	Yes
22	5492	13	13.8	254	No
23	5506	16	19.8	274	Yes
24	5514	14	15.3	278	Yes
25	5495	13	14.5	317	Yes
26	5522	12	11.3	260	Yes
27	5517	15	17.3	211	Yes
28	5518	16	19.2	272	Yes
29	5494	13	14.2	264	Yes
30	5507	15	18.2	284	Yes
					Detection Rate: 80%

802.11be (EHT40) 5510MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5510	LP_SIGNAL_01	Yes
2	18	5510	LP_SIGNAL_02	Yes
3	13	5510	LP_SIGNAL_03	Yes
4	15	5510	LP_SIGNAL_04	Yes
5	5	5510	LP_SIGNAL_05	Yes
6	13	5510	LP_SIGNAL_06	Yes
7	15	5510	LP_SIGNAL_07	Yes
8	12	5510	LP_SIGNAL_08	Yes
9	20	5510	LP_SIGNAL_09	Yes
10	6	5510	LP_SIGNAL_10	Yes
11	20	5499	LP_SIGNAL_11	Yes
12	8	5494.2	LP_SIGNAL_12	Yes
13	7	5493.8	LP_SIGNAL_13	Yes
14	20	5499	LP_SIGNAL_14	Yes
15	17	5497.8	LP_SIGNAL_15	Yes
16	5	5493	LP_SIGNAL_16	Yes
17	20	5499	LP_SIGNAL_17	Yes
18	19	5498.6	LP_SIGNAL_18	Yes
19	10	5495	LP_SIGNAL_19	Yes
20	14	5496.6	LP_SIGNAL_20	Yes
21	5	5527	LP_SIGNAL_21	Yes
22	16	5522.6	LP_SIGNAL_22	Yes
23	5	5527	LP_SIGNAL_23	Yes
24	11	5524.6	LP_SIGNAL_24	Yes
25	5	5527	LP_SIGNAL_25	Yes
26	20	5521	LP_SIGNAL_26	Yes
27	14	5523.4	LP_SIGNAL_27	Yes
28	13	5523.8	LP_SIGNAL_28	Yes
29	7	5526.2	LP_SIGNAL_29	Yes
30	11	5524.6	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT40) 5510MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	No
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	No
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 93.3%

802.11be (EHT80) 5530MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5493	5	1672.2	89	598	Yes
2	5523	23	326.2	18	3066	Yes
3	5538	15	1253.1	67	798	Yes
4	5494	17	1193.3	63	838	Yes
5	5495	9	1474.9	78	678	Yes
6	5533	7	1567.4	83	638	Yes
7	5515	4	1730.1	92	578	Yes
8	5497	16	1222.5	65	818	Yes
9	5510	8	1519.8	81	658	Yes
10	5513	22	1066.1	57	938	Yes
11	5501	6	1618.1	86	618	Yes
12	5517	18	1165.5	62	858	Yes
13	5548	14	1285.3	68	778	Yes
14	5504	10	1432.7	76	698	Yes
15	5505	2	1858.7	99	538	Yes
16	5568	-	416.1	22	2403	Yes
17	5507	-	492.9	27	2029	Yes
18	5522	-	368.2	20	2716	Yes
19	5539	-	386.2	21	2589	Yes
20	5550	-	394.5	21	2535	Yes
21	5553	-	360.1	20	2777	Yes
22	5512	-	494.1	27	2024	Yes
23	5530	-	897.7	48	1114	Yes
24	5541	-	962.5	51	1039	Yes
25	5544	-	380.2	21	2630	Yes
26	5516	-	452.7	24	2209	Yes
27	5502	-	391.8	21	2552	Yes
28	5536	-	1083.4	58	923	Yes
29	5549	-	329.7	18	3033	No
30	5526	-	502	27	1992	Yes
						Detection Rate: 96.7%

802.11be (EHT80) 5530MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5491	24	2	224	Yes
2	5526	29	4.5	219	No
3	5496	26	3.2	167	Yes
4	5494	27	3.7	216	Yes
5	5502	23	1.1	179	Yes
6	5492	26	3.1	181	No
7	5549	27	3.7	188	No
8	5538	26	2.9	155	Yes
9	5517	29	4.8	214	Yes
10	5514	23	1.5	195	No
11	5523	29	4.9	201	Yes
12	5493	24	1.8	197	Yes
13	5529	23	1.5	158	Yes
14	5530	29	4.9	222	Yes
15	5566	28	4.2	185	No
16	5552	23	1	173	Yes
17	5535	29	4.8	190	Yes
18	5568	29	4.5	200	No
19	5495	25	2.3	165	Yes
20	5513	27	3.4	177	Yes
21	5521	23	1	183	Yes
22	5554	28	4	156	Yes
23	5498	23	1.1	213	Yes
24	5540	25	2.7	229	Yes
25	5537	23	1.2	206	Yes
26	5497	29	4.9	203	Yes
27	5515	26	3.3	163	Yes
28	5543	26	3.2	182	Yes
29	5516	24	1.7	166	Yes
30	5533	25	2.6	210	Yes
					Detection Rate: 80%

802.11be (EHT80) 5530MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5563	16	7	239	Yes
2	5512	18	9.5	335	No
3	5564	17	8.2	411	Yes
4	5504	18	8.7	224	Yes
5	5510	16	6.1	428	Yes
6	5524	17	8.1	332	Yes
7	5520	17	8.7	491	Yes
8	5500	17	7.9	348	Yes
9	5519	18	9.8	206	Yes
10	5529	16	6.5	204	Yes
11	5555	18	9.9	438	No
12	5516	16	6.8	484	Yes
13	5553	16	6.5	344	Yes
14	5544	18	9.9	465	Yes
15	5505	18	9.2	444	Yes
16	5506	16	6	357	No
17	5491	18	9.8	423	Yes
18	5528	18	9.5	225	Yes
19	5546	16	7.3	217	Yes
20	5526	17	8.4	242	Yes
21	5550	16	6	483	Yes
22	5509	18	9	470	Yes
23	5545	16	6.1	308	Yes
24	5558	17	7.7	498	Yes
25	5567	16	6.2	477	Yes
26	5501	18	9.9	375	Yes
27	5502	17	8.3	285	Yes
28	5530	17	8.2	433	Yes
29	5507	16	6.7	490	No
30	5561	17	7.6	202	Yes
					Detection Rate: 86.7%

802.11be (EHT80) 5530MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5534	14	16	355	Yes
2	5514	12	11.3	487	Yes
3	5528	13	13.5	344	Yes
4	5536	16	19.4	288	No
5	5503	15	17.5	230	Yes
6	5496	14	15.3	432	Yes
7	5515	14	15.9	207	No
8	5564	13	14.3	443	Yes
9	5499	14	15.8	439	Yes
10	5491	12	11.5	223	Yes
11	5554	15	17.4	208	Yes
12	5525	16	19	463	No
13	5538	14	16	441	Yes
14	5500	13	13.8	323	Yes
15	5520	16	18.9	297	Yes
16	5569	14	15.5	412	Yes
17	5550	16	19.9	324	No
18	5524	13	14.1	271	Yes
19	5533	14	15.2	349	Yes
20	5547	13	13.8	409	Yes
21	5546	15	17.1	373	No
22	5498	13	13.8	254	Yes
23	5513	16	19.8	274	Yes
24	5544	14	15.3	278	No
25	5532	13	14.5	317	Yes
26	5509	12	11.3	260	Yes
27	5505	15	17.3	211	No
28	5519	16	19.2	272	Yes
29	5518	13	14.2	264	Yes
30	5542	15	18.2	284	No
					Detection Rate: 73.3%

802.11be (EHT80) 5530MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5530	LP_SIGNAL_01	No
2	18	5530	LP_SIGNAL_02	Yes
3	13	5530	LP_SIGNAL_03	Yes
4	15	5530	LP_SIGNAL_04	Yes
5	5	5530	LP_SIGNAL_05	No
6	13	5530	LP_SIGNAL_06	Yes
7	15	5530	LP_SIGNAL_07	Yes
8	12	5530	LP_SIGNAL_08	Yes
9	20	5530	LP_SIGNAL_09	Yes
10	6	5530	LP_SIGNAL_10	Yes
11	20	5499	LP_SIGNAL_11	Yes
12	8	5494.2	LP_SIGNAL_12	No
13	7	5493.8	LP_SIGNAL_13	Yes
14	20	5499	LP_SIGNAL_14	Yes
15	17	5497.8	LP_SIGNAL_15	Yes
16	5	5493	LP_SIGNAL_16	No
17	20	5499	LP_SIGNAL_17	Yes
18	19	5498.6	LP_SIGNAL_18	Yes
19	10	5495	LP_SIGNAL_19	Yes
20	14	5496.6	LP_SIGNAL_20	Yes
21	5	5567	LP_SIGNAL_21	No
22	16	5562.6	LP_SIGNAL_22	Yes
23	5	5567	LP_SIGNAL_23	Yes
24	11	5564.6	LP_SIGNAL_24	Yes
25	5	5567	LP_SIGNAL_25	Yes
26	20	5561	LP_SIGNAL_26	Yes
27	14	5563.4	LP_SIGNAL_27	No
28	13	5563.8	LP_SIGNAL_28	Yes
29	7	5566.2	LP_SIGNAL_29	Yes
30	11	5564.6	LP_SIGNAL_30	Yes
				Detection Rate: 80%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT80) 5530MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	No
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	No
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	No
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 96.7%

802.11be (EHT160) 5250MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5253	5	1672.2	89	598	Yes
2	5320	23	326.2	18	3066	Yes
3	5315	15	1253.1	67	798	Yes
4	5287	17	1193.3	63	838	Yes
5	5325	9	1474.9	78	678	Yes
6	5270	7	1567.4	83	638	Yes
7	5266	4	1730.1	92	578	Yes
8	5290	16	1222.5	65	818	Yes
9	5288	8	1519.8	81	658	Yes
10	5329	22	1066.1	57	938	Yes
11	5289	6	1618.1	86	618	Yes
12	5271	18	1165.5	62	858	No
13	5293	14	1285.3	68	778	Yes
14	5279	10	1432.7	76	698	No
15	5294	2	1858.7	99	538	Yes
16	5317	-	416.1	22	2403	Yes
17	5311	-	492.9	27	2029	Yes
18	5322	-	368.2	20	2716	Yes
19	5269	-	386.2	21	2589	Yes
20	5313	-	394.5	21	2535	Yes
21	5285	-	360.1	20	2777	Yes
22	5263	-	494.1	27	2024	Yes
23	5326	-	897.7	48	1114	Yes
24	5259	-	962.5	51	1039	Yes
25	5319	-	380.2	21	2630	Yes
26	5306	-	452.7	24	2209	Yes
27	5281	-	391.8	21	2552	Yes
28	5282	-	1083.4	58	923	Yes
29	5278	-	329.7	18	3033	Yes
30	5272	-	502	27	1992	Yes
						Detection Rate: 93.3%

802.11be (EHT160) 5250MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5250	24	2	224	Yes
2	5258	29	4.5	219	Yes
3	5252	26	3.2	167	Yes
4	5292	27	3.7	216	Yes
5	5326	23	1.1	179	Yes
6	5290	26	3.1	181	Yes
7	5293	27	3.7	188	No
8	5310	26	2.9	155	Yes
9	5322	29	4.8	214	Yes
10	5295	23	1.5	195	Yes
11	5261	29	4.9	201	Yes
12	5284	24	1.8	197	Yes
13	5317	23	1.5	158	Yes
14	5263	29	4.9	222	No
15	5260	28	4.2	185	Yes
16	5251	23	1	173	Yes
17	5256	29	4.8	190	No
18	5282	29	4.5	200	Yes
19	5312	25	2.3	165	Yes
20	5280	27	3.4	177	Yes
21	5259	23	1	183	No
22	5291	28	4	156	Yes
23	5271	23	1.1	213	Yes
24	5302	25	2.7	229	Yes
25	5304	23	1.2	206	Yes
26	5323	29	4.9	203	Yes
27	5278	26	3.3	163	Yes
28	5300	26	3.2	182	Yes
29	5266	24	1.7	166	Yes
30	5279	25	2.6	210	Yes
					Detection Rate: 86.6%

802.11be (EHT160) 5250MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5284	16	7	239	Yes
2	5266	18	9.5	335	Yes
3	5301	17	8.2	411	Yes
4	5273	18	8.7	224	Yes
5	5250	16	6.1	428	Yes
6	5304	17	8.1	332	Yes
7	5288	17	8.7	491	Yes
8	5251	17	7.9	348	Yes
9	5289	18	9.8	206	Yes
10	5268	16	6.5	204	Yes
11	5321	18	9.9	438	Yes
12	5265	16	6.8	484	Yes
13	5274	16	6.5	344	Yes
14	5263	18	9.9	465	Yes
15	5264	18	9.2	444	Yes
16	5296	16	6	357	Yes
17	5311	18	9.8	423	Yes
18	5257	18	9.5	225	Yes
19	5319	16	7.3	217	No
20	5262	17	8.4	242	Yes
21	5328	16	6	483	Yes
22	5272	18	9	470	Yes
23	5306	16	6.1	308	Yes
24	5261	17	7.7	498	Yes
25	5255	16	6.2	477	No
26	5275	18	9.9	375	Yes
27	5276	17	8.3	285	Yes
28	5299	17	8.2	433	Yes
29	5323	16	6.7	490	No
30	5271	17	7.6	202	Yes
					Detection Rate: 90%

802.11be (EHT160) 5250MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5304	14	16	355	Yes
2	5251	12	11.3	487	Yes
3	5321	13	13.5	344	Yes
4	5253	16	19.4	288	No
5	5299	15	17.5	230	Yes
6	5264	14	15.3	432	Yes
7	5256	14	15.9	207	Yes
8	5289	13	14.3	443	No
9	5294	14	15.8	439	Yes
10	5259	12	11.5	223	No
11	5318	15	17.4	208	Yes
12	5270	16	19	463	No
13	5293	14	16	441	Yes
14	5292	13	13.8	323	Yes
15	5279	16	18.9	297	No
16	5295	14	15.5	412	No
17	5254	16	19.9	324	Yes
18	5298	13	14.1	271	No
19	5268	14	15.2	349	Yes
20	5250	13	13.8	409	No
21	5296	15	17.1	373	Yes
22	5329	13	13.8	254	No
23	5326	16	19.8	274	Yes
24	5267	14	15.3	278	No
25	5274	13	14.5	317	Yes
26	5288	12	11.3	260	Yes
27	5325	15	17.3	211	Yes
28	5255	16	19.2	272	Yes
29	5278	13	14.2	264	No
30	5328	15	18.2	284	Yes
					Detection Rate: 63.3%

802.11be (EHT160) 5250MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5290	LP_SIGNAL_01	Yes
2	18	5290	LP_SIGNAL_02	Yes
3	13	5290	LP_SIGNAL_03	Yes
4	15	5290	LP_SIGNAL_04	Yes
5	5	5290	LP_SIGNAL_05	No
6	13	5290	LP_SIGNAL_06	Yes
7	15	5290	LP_SIGNAL_07	Yes
8	12	5290	LP_SIGNAL_08	Yes
9	20	5290	LP_SIGNAL_09	Yes
10	6	5290	LP_SIGNAL_10	Yes
11	20	5258	LP_SIGNAL_11	Yes
12	8	5253.2	LP_SIGNAL_12	Yes
13	7	5252.8	LP_SIGNAL_13	Yes
14	20	5258	LP_SIGNAL_14	No
15	17	5256.8	LP_SIGNAL_15	Yes
16	5	5252	LP_SIGNAL_16	No
17	20	5258	LP_SIGNAL_17	Yes
18	19	5257.6	LP_SIGNAL_18	Yes
19	10	5254	LP_SIGNAL_19	Yes
20	14	5255.6	LP_SIGNAL_20	No
21	5	5327	LP_SIGNAL_21	No
22	16	5322.6	LP_SIGNAL_22	Yes
23	5	5327	LP_SIGNAL_23	No
24	11	5324.6	LP_SIGNAL_24	Yes
25	5	5327	LP_SIGNAL_25	Yes
26	20	5321	LP_SIGNAL_26	Yes
27	14	5323.4	LP_SIGNAL_27	Yes
28	13	5323.8	LP_SIGNAL_28	Yes
29	7	5326.2	LP_SIGNAL_29	Yes
30	11	5324.6	LP_SIGNAL_30	Yes
				Detection Rate: 80%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5250MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	No
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	No
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	No
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 90%

802.11be (EHT160) 5570MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5564	5	1672.2	89	598	Yes
2	5492	23	326.2	18	3066	Yes
3	5493	15	1253.1	67	798	Yes
4	5603	17	1193.3	63	838	Yes
5	5505	9	1474.9	78	678	Yes
6	5578	7	1567.4	83	638	Yes
7	5631	4	1730.1	92	578	Yes
8	5592	16	1222.5	65	818	Yes
9	5499	8	1519.8	81	658	Yes
10	5497	22	1066.1	57	938	Yes
11	5501	6	1618.1	86	618	Yes
12	5649	18	1165.5	62	858	No
13	5643	14	1285.3	68	778	Yes
14	5528	10	1432.7	76	698	Yes
15	5583	2	1858.7	99	538	No
16	5506	-	416.1	22	2403	Yes
17	5614	-	492.9	27	2029	Yes
18	5574	-	368.2	20	2716	Yes
19	5491	-	386.2	21	2589	Yes
20	5576	-	394.5	21	2535	Yes
21	5641	-	360.1	20	2777	Yes
22	5552	-	494.1	27	2024	Yes
23	5513	-	897.7	48	1114	Yes
24	5628	-	962.5	51	1039	Yes
25	5620	-	380.2	21	2630	Yes
26	5629	-	452.7	24	2209	Yes
27	5645	-	391.8	21	2552	Yes
28	5514	-	1083.4	58	923	Yes
29	5521	-	329.7	18	3033	Yes
30	5573	-	502	27	1992	Yes
						Detection Rate: 93.3%

802.11be (EHT160) 5570MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5491	24	2	224	No
2	5523	29	4.5	219	Yes
3	5504	26	3.2	167	Yes
4	5494	27	3.7	216	Yes
5	5565	23	1.1	179	No
6	5496	26	3.1	181	Yes
7	5591	27	3.7	188	Yes
8	5510	26	2.9	155	Yes
9	5546	29	4.8	214	Yes
10	5528	23	1.5	195	No
11	5638	29	4.9	201	Yes
12	5515	24	1.8	197	Yes
13	5519	23	1.5	158	Yes
14	5551	29	4.9	222	Yes
15	5566	28	4.2	185	Yes
16	5628	23	1	173	Yes
17	5602	29	4.8	190	Yes
18	5615	29	4.5	200	Yes
19	5577	25	2.3	165	Yes
20	5642	27	3.4	177	Yes
21	5532	23	1	183	Yes
22	5512	28	4	156	No
23	5531	23	1.1	213	Yes
24	5514	25	2.7	229	Yes
25	5530	23	1.2	206	Yes
26	5605	29	4.9	203	Yes
27	5543	26	3.3	163	No
28	5518	26	3.2	182	Yes
29	5503	24	1.7	166	Yes
30	5630	25	2.6	210	Yes
					Detection Rate: 83.3%

802.11be (EHT160) 5570MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5523	16	7	239	No
2	5635	18	9.5	335	Yes
3	5514	17	8.2	411	Yes
4	5583	18	8.7	224	No
5	5549	16	6.1	428	Yes
6	5590	17	8.1	332	Yes
7	5533	17	8.7	491	No
8	5575	17	7.9	348	Yes
9	5505	18	9.8	206	Yes
10	5644	16	6.5	204	Yes
11	5611	18	9.9	438	Yes
12	5574	16	6.8	484	Yes
13	5499	16	6.5	344	No
14	5509	18	9.9	465	Yes
15	5495	18	9.2	444	Yes
16	5558	16	6	357	Yes
17	5622	18	9.8	423	Yes
18	5559	18	9.5	225	Yes
19	5592	16	7.3	217	Yes
20	5566	17	8.4	242	Yes
21	5603	16	6	483	No
22	5580	18	9	470	Yes
23	5587	16	6.1	308	Yes
24	5494	17	7.7	498	Yes
25	5515	16	6.2	477	Yes
26	5544	18	9.9	375	Yes
27	5498	17	8.3	285	Yes
28	5518	17	8.2	433	Yes
29	5534	16	6.7	490	No
30	5600	17	7.6	202	Yes
					Detection Rate: 80%

802.11be (EHT160) 5570MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5491	14	16	355	No
2	5508	12	11.3	487	Yes
3	5592	13	13.5	344	No
4	5562	16	19.4	288	Yes
5	5495	15	17.5	230	Yes
6	5542	14	15.3	432	No
7	5642	14	15.9	207	Yes
8	5641	13	14.3	443	No
9	5644	14	15.8	439	No
10	5629	12	11.5	223	No
11	5607	15	17.4	208	Yes
12	5543	16	19	463	Yes
13	5503	14	16	441	No
14	5504	13	13.8	323	Yes
15	5563	16	18.9	297	Yes
16	5623	14	15.5	412	Yes
17	5507	16	19.9	324	Yes
18	5496	13	14.1	271	Yes
19	5509	14	15.2	349	No
20	5594	13	13.8	409	Yes
21	5633	15	17.1	373	Yes
22	5512	13	13.8	254	No
23	5518	16	19.8	274	Yes
24	5577	14	15.3	278	Yes
25	5549	13	14.5	317	Yes
26	5516	12	11.3	260	Yes
27	5502	15	17.3	211	Yes
28	5602	16	19.2	272	Yes
29	5639	13	14.2	264	No
30	5617	15	18.2	284	Yes
					Detection Rate: 66.7%

802.11be (EHT160) 5570MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5570	LP_SIGNAL_01	Yes
2	18	5570	LP_SIGNAL_02	Yes
3	13	5570	LP_SIGNAL_03	Yes
4	15	5570	LP_SIGNAL_04	Yes
5	5	5570	LP_SIGNAL_05	No
6	13	5570	LP_SIGNAL_06	No
7	15	5570	LP_SIGNAL_07	Yes
8	12	5570	LP_SIGNAL_08	Yes
9	20	5570	LP_SIGNAL_09	Yes
10	6	5570	LP_SIGNAL_10	No
11	20	5499	LP_SIGNAL_11	Yes
12	8	5494.2	LP_SIGNAL_12	Yes
13	7	5493.8	LP_SIGNAL_13	Yes
14	20	5499	LP_SIGNAL_14	Yes
15	17	5497.8	LP_SIGNAL_15	Yes
16	5	5493	LP_SIGNAL_16	Yes
17	20	5499	LP_SIGNAL_17	Yes
18	19	5498.6	LP_SIGNAL_18	Yes
19	10	5495	LP_SIGNAL_19	Yes
20	14	5496.6	LP_SIGNAL_20	Yes
21	5	5647	LP_SIGNAL_21	Yes
22	16	5642.6	LP_SIGNAL_22	Yes
23	5	5647	LP_SIGNAL_23	Yes
24	11	5644.6	LP_SIGNAL_24	Yes
25	5	5647	LP_SIGNAL_25	No
26	20	5641	LP_SIGNAL_26	Yes
27	14	5643.4	LP_SIGNAL_27	No
28	13	5643.8	LP_SIGNAL_28	No
29	7	5646.2	LP_SIGNAL_29	Yes
30	11	5644.6	LP_SIGNAL_30	Yes
				Detection Rate: 80%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5570MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

8 Declaration of Conformity by the Manufacturer

8.1 Transmit Power Control (TPC)

U-NII devices operating in DFS Bands (5.25 to 5.35 GHz and 5.47 to 5.725 GHz) shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

The maximum EIRP of this device is 584.144 mW, and it has TPC functionality.

The UUT can adjust a transmitter's output power according to the device's Transmit Power Control (TPC) triggering mechanism. The TPC is controlled by the operation mode declared by the manufacturer.

8.2 Statement of Manufacturer

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

9 Pictures of Test Arrangements

Please refer to the attached file (DFS Test Setup Photo)

10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

11 Appendix

11.1 Radar Test Signal

The Long Pulse Radar Pattern

802.11be (EHT20) 5500MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 11						
Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 10
Chirp Center Frequency: 5493.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 9
Chirp Center Frequency: 5492.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_15

Number of Bursts in Trial: 18

Chirp Center Frequency: 5496.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_16

Number of Bursts in Trial: 8

Chirp Center Frequency: 5492MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 19
Chirp Center Frequency: 5497.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5495.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5508MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5503.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5508MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5505.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5508MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5502MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5504.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5504.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5507.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5505.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT40) 5510MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5494.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5493.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 18
Chirp Center Frequency: 5497.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 8
Chirp Center Frequency: 5493MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_17

Number of Bursts in Trial: 20

Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5496.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5527MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5522.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5527MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5524.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5527MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5521MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5523.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5523.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5526.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5524.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT80) 5530MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5494.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5493.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_15

Number of Bursts in Trial: 18

Chirp Center Frequency: 5497.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_16

Number of Bursts in Trial: 8

Chirp Center Frequency: 5493MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 12
Chirp Center Frequency: 5495MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5496.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5567MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5562.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5567MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5564.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5567MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5561MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5563.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5563.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5566.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5564.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT160) 5250MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 20
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 9
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5253.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 9
Chirp Center Frequency: 5252.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 20
Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_15

Number of Bursts in Trial: 18

Chirp Center Frequency: 5256.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_16

Number of Bursts in Trial: 8

Chirp Center Frequency: 5252MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5257.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 15
Chirp Center Frequency: 5255.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 8
Chirp Center Frequency: 5327MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5322.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5327MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5324.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5327MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5321MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5323.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5323.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5326.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5324.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT160) 5570MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5494.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5493.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 18
Chirp Center Frequency: 5497.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 8
Chirp Center Frequency: 5493MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 15
Chirp Center Frequency: 5496.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 8
Chirp Center Frequency: 5647MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5642.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5647MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5644.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5647MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5641MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5643.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5643.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5646.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5644.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

--- END ---