RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.
TEL (760) 471-2100 • FAX (760) 471-2121
http://www.rfexposurelab.com

# CERTIFICATE OF COMPLIANCE
# SAR EVALUATION

| | | | |
|---|---|---|---|
| Intel Mobile Communication | | Dates of Test: | June 29-July 2, 2018 |
| 100 Center Point Circle, Suite 200 | | Test Report Number: | SAR.20180701 |
| Columbia, SC 29210 | | | |

| | |
|---|---|
| FCC ID: | PD98265NG (Contains Model 8265NGW) |
| IC Certificate: | 1000M-8265NG (Contains Model 8265NGW) |
| Model(s): | HSN-I16C |
| Contains WLAN Model: | Intel® Dual Band Wireless-AC 8265 (Model 8265NGW) |
| Test Sample: | Engineering Unit Same as Production |
| Serial Number: | Eng 1 |
| Equipment Type: | Wireless Module Installed in Notebook/Tablet |
| Classification: | Portable Transmitter Next to Body |
| TX Frequency Range: | 2412 – 2462 MHz; 5180 – 5320 MHz; 5500 – 5700 MHz; 5745 – 5825 MHz |
| Frequency Tolerance: | ± 2.5 ppm |
| Maximum RF Output: | 2450 MHz (b) – 20.00 dB, 2450 MHz (g) – 20.00 dB, 2450 MHz (n20) – 20.00 dB, 5250 MHz (a) – 20.00 dB, 5250 MHz (n20) – 20.00 dB, 5250 MHz (n40) – 20.00 dB, 5250 MHz (ac) – 20.00 dB, 5600 MHz (a) – 20.00 dB, 5600 MHz (n20) – 20.00 dB, 5600 MHz (n40) – 20.00 dB, 5600 MHz (ac) – 20.00 dB, 5800 MHz (a) – 20.00 dB, 5800 MHz (n20) – 20.00 dB, 5800 MHz (n40) – 20.00 dB, 5800 MHz (ac) – 20.00 dB Conducted |
| Signal Modulation: | DSSS, OFDM |
| Antenna Type: | HongBo, P/N 260-27174 (Tx1) & 260-27175 (Tx2); PIFA Antenna |
| Application Type: | Certification |
| FCC Rule Parts: | Part 2, 15C, 15E |
| KDB Test Methodology: | KDB 447498 D01 v06, KDB 248227 v02r02, KDB 616217 D04 v01r02 |
| Industry Canada: | RSS-102 Issue 5, Safety Code 6 |
| Maximum SAR Value: | 1.46 W/kg Reported |
| Max. Simultaneous SAR: | 0.04 Separation Ratio |
| Separation Distance: | 9.05 mm |

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and IEC 62209-2:2010 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application is subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

Jay M. Moulton
Vice President

ACCREDITED
Testing Cert. # 2387.01

© 2018 RF Exposure Lab, LLC
*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# Table of Contents

1. Introduction ..... 3
SAR Definition [5] ..... 4
2. SAR Measurement Setup ..... 5
Robotic System ..... 5
System Hardware ..... 5
System Electronics ..... 6
Probe Measurement System ..... 6
3. Probe and Dipole Calibration ..... 14
4. Phantom & Simulating Tissue Specifications ..... 15
Head & Body Simulating Mixture Characterization ..... 15
5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2] ..... 16
Uncontrolled Environment ..... 16
Controlled Environment ..... 16
6. Measurement Uncertainty ..... 17
7. System Validation ..... 18
Tissue Verification ..... 18
Test System Verification ..... 18
8. SAR Test Data Summary ..... 19
Procedures Used To Establish Test Signal ..... 19
Device Test Condition ..... 19
SAR Data Summary – 2450 MHz Body 802.11b & BT ..... 31
SAR Data Summary – 5250 MHz Body 802.11a ..... 32
SAR Data Summary – 5600 MHz Body 802.11a ..... 33
SAR Data Summary – 5800 MHz Body 802.11a ..... 34
SAR Data Summary – Simultaneous Evaluation ..... 35
9. Test Equipment List ..... 36
10. Conclusion ..... 37
11. References ..... 38
Appendix A – System Validation Plots and Data ..... 39
Appendix B – SAR Test Data Plots ..... 49
Appendix C – SAR Test Setup Photos ..... 54
Appendix D – Probe Calibration Data Sheets ..... 56
Appendix E – Dipole Calibration Data Sheets ..... 95
Appendix F – Phantom Calibration Data Sheets ..... 120
Appendix G – Validation Summary ..... 122

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 1. Introduction

This measurement report shows compliance of the Intel Mobile Communications Model 8265NGW installed in HP Model HSN-I16C FCC ID: PD98265NG with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices and IC Certificate: 1000M-8265NG with RSS102 & Safety Code 6. The FCC have adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on August 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test results recorded herein are based on a single type test of Intel Mobile Communications Model 8265NGW installed in HP Model HSN-I16C and therefore apply only to the tested sample.

The test procedures, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], IEEE Std.1528 – 2013 Recommended Practice [4], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

The following table indicates all the wireless technologies operating in the 8265NGW installed in HP Model HSN-I16C wireless modem. The table also shows the tolerance for the power level for each mode.

| Band | Technology | 3GPP Nominal Power dBm | Setpoint Nominal Power dBm | Tolerance dBm | Lower Tolerance dBm | Upper Tolerance dBm |
|---|---|---|---|---|---|---|
| WLAN – 2.4 GHz | 802.11b/g | N/A | 19.0 | ±1.0 | 18.0 | 20.0 |
| WLAN – 2.4 GHz | 802.11n | N/A | 19.0 | ±1.0 | 18.0 | 20.0 |
| WLAN – 5 GHz Band I | 802.11an/ac | N/A | 19.0 | ±1.0 | 18.0 | 20.0 |
| WLAN – 5 GHz Band II | 802.11an/ac | N/A | 19.0 | ±1.0 | 18.0 | 20.0 |
| WLAN – 5 GHz Band III | 802.11an/ac | N/A | 19.0 | ±1.0 | 18.0 | 20.0 |
| WLAN – 5 GHz Band IV | 802.11an/ac | N/A | 19.0 | ±1.0 | 18.0 | 20.0 |
| BT – BDR | Bluetooth | N/A | 10.5 | ±1.5 | 9.0 | 12.0 |
| BT – EDR2 & EDR3 | Bluetooth | N/A | 6.5 | ±1.5 | 5.0 | 8.0 |
| BT – BLE | Bluetooth | N/A | 10.5 | ±1.5 | 9.0 | 12.0 |

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (*dW*) absorbed by (dissipated in) an incremental mass (*dm*) contained in a volume element (*dV*) of a given density ($\rho$).

$$SAR = \frac{d}{dt}\left(\frac{dW}{dm}\right) = \frac{d}{dt}\left(\frac{dW}{\rho dV}\right)$$

SAR is expressed in units of watts per kilogram (W/kg). *SAR* can be related to the electric field at a point by

$$SAR = \frac{\sigma \mid E \mid^2}{\rho}$$

where:

$\sigma$ = conductivity of the tissue (S/m)
$\rho$ = mass density of the tissue (kg/m$^3$)
*E* = rms electric field strength (V/m)

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 2. SAR Measurement Setup

## Robotic System

These measurements are performed using the DASY52 automated dosimetric assessment system. The DASY52 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

## System Hardware

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the HP Intel Core2 computer with Windows XP system and SAR Measurement Software DASY52, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

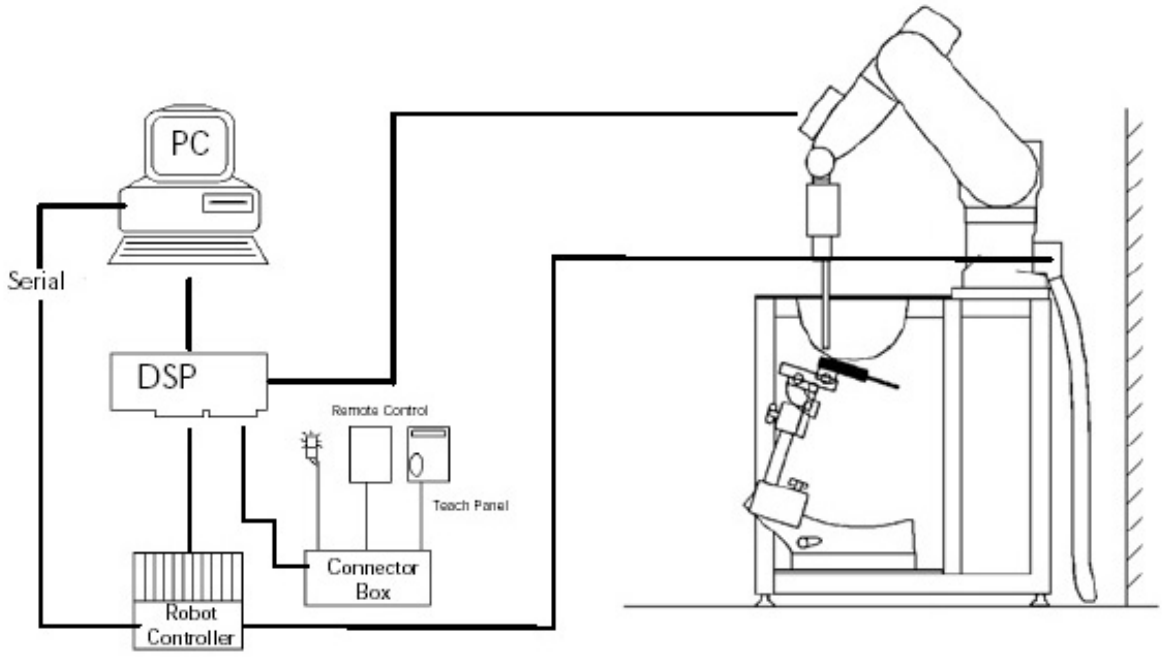


**Figure 2.1 SAR Measurement System Setup**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

## Probe Measurement System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 2.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi fiber line ending at the front of the probe tip. (see Fig. 2.3) It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY52 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

**DAE System**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Probe Specifications

**Calibration:** In air from 10 MHz to 6.0 GHz
In brain and muscle simulating tissue at Frequencies of 450 MHz, 835 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5600 MHz, 5800 MHz

**Frequency**: 10 MHz to 6 GHz

**Linearity:** ±0.2dB (30 MHz to 6 GHz)

**Dynamic:** 10 mW/kg to 100 W/kg

**Range:** Linearity: ±0.2dB

**Dimensions:** Overall length: 330 mm

**Tip length:** 20 mm

**Body diameter:** 12 mm

**Tip diameter:** 2.5 mm

**Distance from probe tip to sensor center:** 1 mm

**Application:** SAR Dosimetry Testing
Compliance tests of wireless device




**Figure 2.2 Triangular Probe Configurations**

**Figure 2.3 Probe Thick-Film Technique**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Probe Calibration Process

### Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

### Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm$^2$.

### Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor based temperature probe is used in conjunction with the E-field probe

$$SAR = C\frac{\Delta T}{\Delta t}$$

where:

$\Delta t$ = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

$\Delta T$ = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

$\sigma$ = simulated tissue conductivity,

$\rho$ = Tissue density (1.25 g/cm$^3$ for brain tissue)

SAR is proportional to ΔT / Δt , the initial rate of tissue heating, before thermal diffusion takes place.
Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

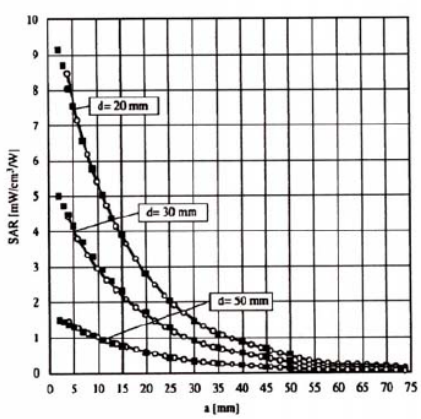


**Figure 2.4 E-Field and Temperature Measurements at 900MHz**

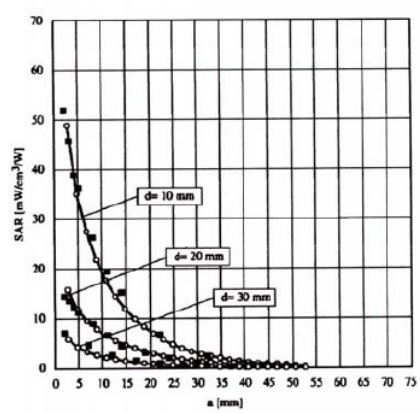


**Figure 2.5 E-Field and Temperature Measurements at 1800MHz**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Data Extrapolation

The DASY52 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with
$V_i$ = compensated signal of channel i (i=x,y,z)
$U_i$ = input signal of channel i (i=x,y,z)
cf = crest factor of exciting field (DASY parameter)
$dcp_i$ = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with
$V_i$ = compensated signal of channel i (i = x,y,z)
$Norm_i$ = sensor sensitivity of channel i (i = x,y,z) $\mu V/(V/m)^2$ for E-field probes
ConvF = sensitivity of enhancement in solution
$E_i$ = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with
SAR = local specific absorption rate in W/g
$E_{tot}$ = total field strength in V/m
$\sigma$ = conductivity in [mho/m] or [Siemens/m]
$\rho$ = equivalent tissue density in $g/cm^3$

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770}$$

with
$P_{pwe}$ = equivalent power density of a plane wave in $W/cm^2$
$E_{tot}$ = total electric field strength in V/m


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.

- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASY5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.

- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges ≤ 2GHz is 15 mm in x - and y- dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

| **Area scan grid spacing for different frequency ranges** | |
|---|---|
| Frequency range | Grid spacing |
| ≤ 2 GHz | ≤ 15 mm |
| 2 – 4 GHz | ≤ 12 mm |
| 4 – 6 GHz | ≤ 10 mm |

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

- A „zoom scan" measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse" scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

| **Zoom scan grid spacing and volume for different frequency ranges** | | | |
|---|---|---|---|
| Frequency range | Grid spacing for x, y axis | Grid spacing for z axis | Minimum zoom scan volume |
| ≤ 2 GHz | ≤ 8 mm | ≤ 5 mm | ≥ 30 mm |
| 2 – 3 GHz | ≤ 5 mm | ≤ 5 mm | ≥ 28 mm |
| 3 – 4 GHz | ≤ 5 mm | ≤ 4 mm | ≥ 28 mm |
| 4 – 5 GHz | ≤ 4 mm | ≤ 3 mm | ≥ 25 mm |
| 5 – 6 GHz | ≤ 4 mm | ≤ 2 mm | ≥ 22 mm |

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.

- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.

- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

## Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

## Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

## Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

## Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAM PHANTOM

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 2.6)

## Phantom Specification

**Phantom:** SAM Twin Phantom (V4.0)
**Shell Material:** Vivac Composite
**Thickness:** 2.0 ± 0.2 mm

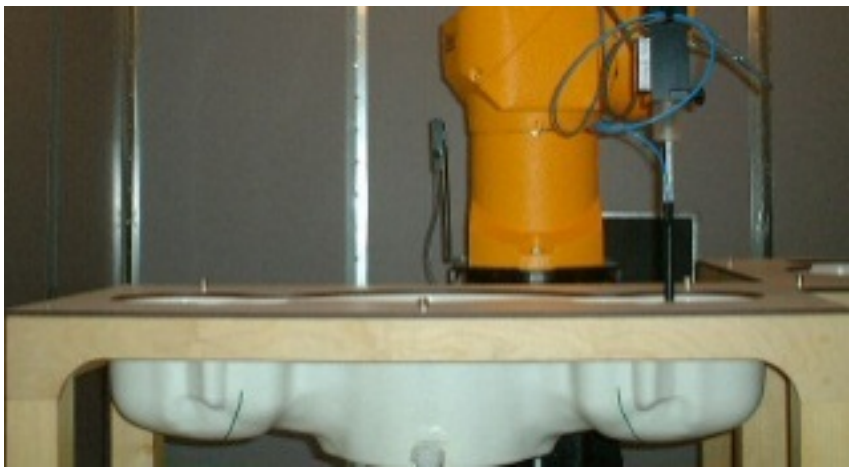

**Figure 2.6 SAM Twin Phantom**

## Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0 the Mounting Device (see Fig. 2.7), enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeat ably be positioned according to the FCC, CENELEC, IEC and IEEE specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

**Figure 2.7 Mounting Device**

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 3. Probe and Dipole Calibration

**See Appendix D and E.**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 4. Phantom & Simulating Tissue Specifications

## Head & Body Simulating Mixture Characterization

The head and body mixtures consist of the material based on the table listed below. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. Body tissue parameters that have not been specified in IEEE1528-2013 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations.

**Table 4.1 Typical Composition of Ingredients for Tissue**

| Ingredients | | Simulating Tissue | | | |
|---|---|---|---|---|---|
| | | 2450 MHz Body | 5250 MHz Body | 5600 MHz Body | 5785 MHz Body |
| Mixing Percentage | | | | | |
| Water | | 73.20 | Proprietary Mixture Procured from Speag | | |
| Sugar | | 0.00 | | | |
| Salt | | 0.04 | | | |
| HEC | | 0.00 | | | |
| Bactericide | | 0.00 | | | |
| DGBE | | 26.70 | | | |
| Dielectric Constant | Target | 52.70 | 48.96 | 48.47 | 48.25 |
| Conductivity (S/m) | Target | 1.95 | 5.35 | 5.77 | 5.96 |


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]

## Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

## Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 5.1 Human Exposure Limits**

| | UNCONTROLLED ENVIRONMENT<br>General Population<br>(W/kg) or (mW/g) | CONTROLLED ENVIROMENT<br>Professional Population<br>(W/kg) or (mW/g) |
|---|---|---|
| SPATIAL PEAK SAR[1]<br>Head | 1.60 | 8.00 |
| SPATIAL AVERAGE SAR[2]<br>Whole Body | 0.08 | 0.40 |
| SPATIAL PEAK SAR[3]<br>Hands, Feet, Ankles, Wrists | 4.00 | 20.00 |

[1] The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
[2] The Spatial Average value of the SAR averaged over the whole body.
[3] The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 6. Measurement Uncertainty

Measurement uncertainty table is not required per KDB 865664 D01 v01r04 section 2.8.2 page 12. SAR measurement uncertainty analysis is required in the SAR report only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR. The equivalent ratio (1.5/1.6) should be applied to extremity and occupational exposure conditions. The highest reported value is less than 1.5 W/kg. Therefore, the measurement uncertainty table is not required.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 7. System Validation

## Tissue Verification

**Table 7.1 Measured Tissue Parameters**

| | | 2450 MHz Body | | 5200 MHz Body | |
|---|---|---|---|---|---|
| Date(s) | | July 29, 2018 | | July 29, 2018 | |
| Liquid Temperature (˚C) | 20.0 | Target | Measured | Target | Measured |
| Dielectric Constant: ε | | 52.70 | 52.53 | 49.01 | 49.04 |
| Conductivity: σ | | 1.95 | 1.96 | 5.30 | 5.29 |
| | | 5600 MHz Body | | 5800 MHz Body | |
| Date(s) | | July 29, 2018 | | July 29, 2018 | |
| Liquid Temperature (˚C) | 20.0 | Target | Measured | Target | Measured |
| Dielectric Constant: ε | | 48.47 | 48.49 | 48.20 | 48.19 |
| Conductivity: σ | | 5.77 | 5.76 | 6.00 | 6.00 |

See Appendix A for data printout.

## Test System Verification

Prior to assessment, the system is verified to the ±10% of the specifications at the test frequency by using the system kit. Power is normalized to 1 watt. (Graphic Plots Attached)

**Table 7.2 System Dipole Validation Target & Measured**

| | Test Frequency | Targeted $SAR_{1g}$ (W/kg) | Measure $SAR_{1g}$ (W/kg) | Tissue Used for Verification | Deviation Target and Fast SAR to SAR (%) | Plot Number |
|---|---|---|---|---|---|---|
| 29-Jul-2018 | 2450 MHz | 52.10 | 52.28 | Body | + 0.35 | 1 |
| 29-Jul-2018 | 5200 MHz | 77.40 | 77.70 | Body | + 0.39 | 2 |
| 29-Jul-2018 | 5600 MHz | 80.70 | 82.30 | Body | + 1.98 | 3 |
| 29-Jul-2018 | 5800 MHz | 78.80 | 78.70 | Body | - 0.13 | 4 |

See Appendix A for data plots.

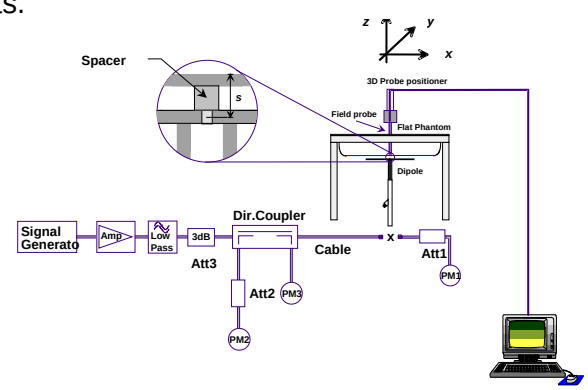


**Figure 7.1 Dipole Validation Test Setup**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 8. SAR Test Data Summary

## See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.
See Appendix C for SAR Test Setup Photos.

## Procedures Used To Establish Test Signal

The device was either placed into simulated transmit mode using the manufacturer's test codes or the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

## Device Test Condition

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated. The power drift of each test is measured at the start of the test and again at the end of the test. The drift percentage is calculated by the formula ((end/start)-1)*100 and rounded to three decimal places. The drift percentage is calculated into the resultant SAR value on the data sheet for each test.

The EUT was tested on the bottom of the laptop with the LCD screen at a 90° angle from the phantom. All measurements were conducted with the side of the device in direct contact with the phantom. For sides of the antenna which were not measured in this report, the SAR was conduct on the module in the modular approval with the maximum distance of 8 mm on all six sides of the antenna. Therefore, the requirements mentioned in RSS-102 Supplementary Procedures (SPR)-001 – SAR Testing Requirements with Regards to Bystanders for Laptop Type Computers with Antennas Built-In on Display Screen (Laptop/Tablet Mode) are covered.

The Bluetooth transmitter does simultaneously transmit with the WiFi transmitter. When the BT is turned on, it transmits on Aux and the WiFi transmits on Main. Simultaneous transmission is evaluated on page 35.

The main antenna was evaluated for stand-alone SAR per RSS-102 Issue 5 for BT. Please see data sheet summary on page 31.

The data rates used when evaluating the WiFi transmitter were the lowest data rates for each mode. The device was operating at its maximum output power at the lowest data rate for all measurements.

The tablet was using the Intel test utility DRTU Version 10.1720.0-05195 and the device driver was version 19.20.0.6.

The antenna was on a minimum of 10 cm of Styrofoam during each test. The following is a pictorial drawing of the locations and separation distances.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

**Location and Separation Distances Diagrams Laptop Mode**

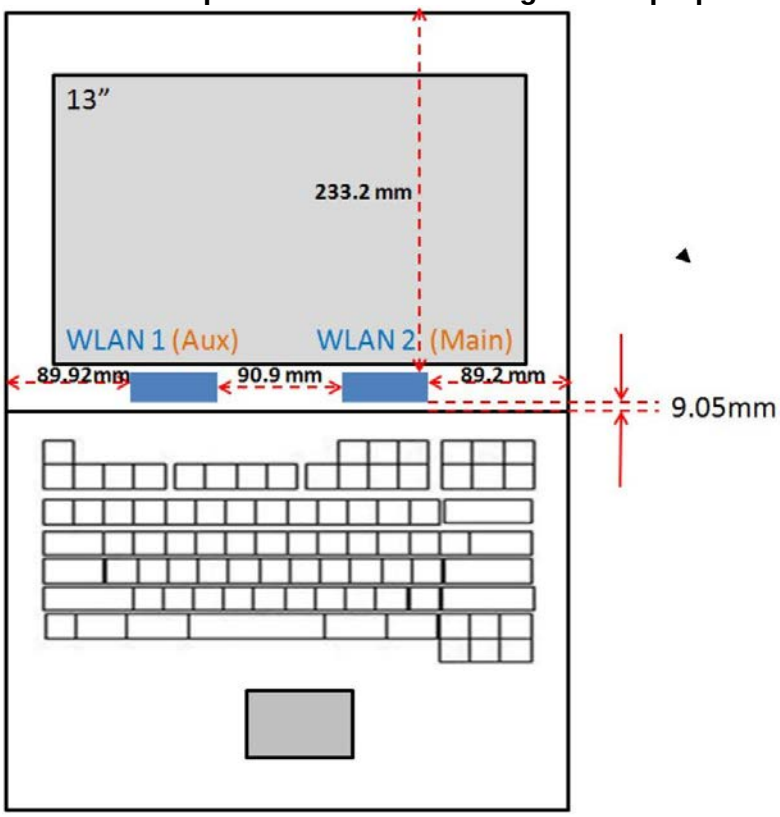


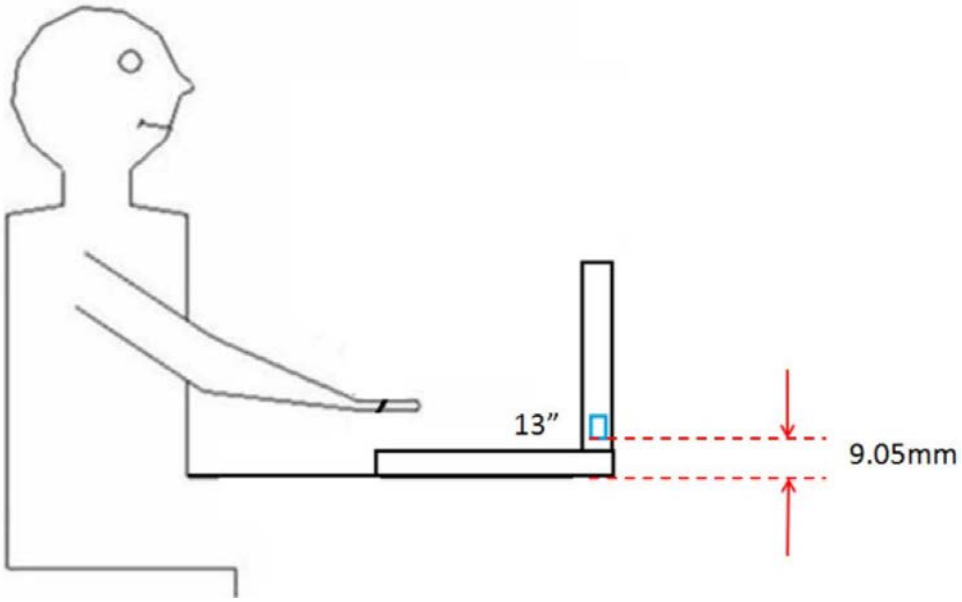



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

| Band | Mode | Bandwidth (MHz) | Channel | Frequency (MHz) | Data Rate | Antenna | Power (dBm) |
|---|---|---|---|---|---|---|---|
| 2450 MHz | 802.11b | 20 | 1 | 2412 | 1 Mbps | Chain A | 19.91 |
| | | | 6 | 2437 | | | 20.00 |
| | | | 11 | 2462 | | | 19.96 |
| | | | 1 | 2412 | | Chain B | 19.95 |
| | | | 6 | 2437 | | | 20.00 |
| | | | 10 | 2457 | | | 19.96 |
| | 802.11g | 20 | 2 | 2417 | 6 Mbps | Chain A | 19.93 |
| | | | 6 | 2437 | | | 19.98 |
| | | | 9 | 2452 | | | 19.96 |
| | | | 2 | 2417 | | Chain B | 19.95 |
| | | | 6 | 2437 | | | 19.99 |
| | | | 9 | 2452 | | | 19.92 |
| | 802.11n | 20 | 1 | 2412 | HT4 | Chain A | 19.90 |
| | | | 6 | 2437 | | | 19.97 |
| | | | 11 | 2462 | | | 19.89 |
| | | | 1 | 2412 | | Chain B | 19.91 |
| | | | 6 | 2437 | | | 19.92 |
| | | | 10 | 2457 | | | 19.96 |
| 5.15-5.25 GHz | 802.11a | 20 | 36 | 5180 | 6 Mbps | Chain A | 19.92 |
| | | | 40 | 5200 | | | 19.97 |
| | | | 44 | 5220 | | | 20.00 |
| | | | 48 | 5240 | | | 19.96 |
| | | | 36 | 5180 | | Chain B | 19.96 |
| | | | 40 | 5200 | | | 19.92 |
| | | | 44 | 5220 | | | 20.00 |
| | | | 48 | 5240 | | | 19.99 |
| | 802.11n | 20 | 36 | 5180 | HT4 | Chain A | 19.89 |
| | | | 40 | 5200 | | | 19.93 |
| | | | 44 | 5220 | | | 19.96 |
| | | | 48 | 5240 | | | 19.92 |
| | | | 36 | 5180 | | Chain B | 19.88 |
| | | | 40 | 5200 | | | 19.85 |
| | | | 44 | 5220 | | | 19.93 |
| | | | 48 | 5240 | | | 19.90 |
| | 802.11n | 40 | 38 | 5190 | HT4 | Chain A | 19.86 |
| | | | 46 | 5230 | | | 19.89 |
| | | | 38 | 5190 | HT4 | Chain B | 9.85 |
| | | | 46 | 5230 | | | 19.88 |
| | 802.11ac | 80 | 42 | 5210 | VHT6 | Chain A | 19.87 |
| | | | | | | Chain B | 19.84 |
| 5.25-5.35 GHz | 802.11a | 20 | 52 | 5260 | 6 Mbps | Chain A | 19.98 |
| | | | 56 | 5280 | | | 19.96 |
| | | | 60 | 5300 | | | 20.00 |
| | | | 64 | 5320 | | | 19.86 |
| | | | 52 | 5260 | | Chain B | 19.94 |
| | | | 56 | 5280 | | | 19.95 |
| | | | 60 | 5300 | | | 20.00 |
| | | | 64 | 5320 | | | 19.92 |
| | 802.11n | 20 | 52 | 5260 | HT4 | Chain A | 19.91 |
| | | | 56 | 5280 | | | 19.87 |
| | | | 60 | 5300 | | | 19.89 |
| | | | 64 | 5320 | | | 19.83 |
| | | | 52 | 5260 | | Chain B | 19.91 |
| | | | 56 | 5280 | | | 19.88 |
| | | | 60 | 5300 | | | 19.96 |
| | | | 64 | 5320 | | | 19.90 |
| | 802.11n | 40 | 54 | 5270 | HT4 | Chain A | 19.82 |
| | | | 62 | 5310 | | | 19.89 |
| | | | 54 | 5270 | HT4 | Chain B | 19.85 |
| | | | 62 | 5310 | | | 19.87 |
| | 802.11ac | 80 | 58 | 5290 | VHT6 | Chain A | 19.91 |
| | | | | | | Chain B | 19.95 |

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

| Band | Mode | Bandwidth (MHz) | Channel | Frequency (MHz) | Data Rate | Antenna | Power (dBm) |
|---|---|---|---|---|---|---|---|
| 5600 MHz | 802.11a | 20 | 100 | 5500 | 6 Mbps | Chain A | 19.96 |
| | | | 104 | 5520 | | | 20.00 |
| | | | 108 | 5540 | | | 19.92 |
| | | | 112 | 5560 | | | 19.91 |
| | | | 116 | 5580 | | | 20.00 |
| | | | 120 | 5600 | | | 19.94 |
| | | | 124 | 5620 | | | 20.00 |
| | | | 128 | 5640 | | | 19.92 |
| | | | 132 | 5660 | | | 19.93 |
| | | | 136 | 5680 | | | 20.00 |
| | | | 140 | 5700 | | | 19.90 |
| | | | 100 | 5500 | | Chain B | 19.94 |
| | | | 104 | 5520 | | | 20.00 |
| | | | 108 | 5540 | | | 19.90 |
| | | | 112 | 5560 | | | 19.95 |
| | | | 116 | 5580 | | | 20.00 |
| | | | 120 | 5600 | | | 19.89 |
| | | | 124 | 5620 | | | 20.00 |
| | | | 128 | 5640 | | | 19.93 |
| | | | 132 | 5660 | | | 19.91 |
| | | | 136 | 5680 | | | 20.00 |
| | | | 140 | 5700 | | | 19.94 |
| | 802.11n | 20 | 100 | 5500 | HT4 | Chain A | 19.95 |
| | | | 104 | 5520 | | | 19.90 |
| | | | 108 | 5540 | | | 19.89 |
| | | | 112 | 5560 | | | 19.87 |
| | | | 116 | 5580 | | | 19.88 |
| | | | 120 | 5600 | | | 19.90 |
| | | | 124 | 5620 | | | 19.94 |
| | | | 128 | 5640 | | | 19.85 |
| | | | 132 | 5660 | | | 19.82 |
| | | | 136 | 5680 | | | 19.87 |
| | | | 140 | 5700 | | | 19.83 |
| | | | 100 | 5500 | | Chain B | 19.84 |
| | | | 104 | 5520 | | | 19.96 |
| | | | 108 | 5540 | | | 19.92 |
| | | | 112 | 5560 | | | 19.90 |
| | | | 116 | 5580 | | | 19.93 |
| | | | 120 | 5600 | | | 19.97 |
| | | | 124 | 5620 | | | 19.89 |
| | | | 128 | 5640 | | | 19.87 |
| | | | 132 | 5660 | | | 19.84 |
| | | | 136 | 5680 | | | 19.82 |
| | | | 140 | 5700 | | | 19.91 |
| | 802.11n | 40 | 102 | 5510 | HT4 | Chain A | 19.92 |
| | | | 110 | 5550 | | | 19.91 |
| | | | 118 | 5580 | | | 19.87 |
| | | | 126 | 5610 | | | 19.89 |
| | | | 134 | 5670 | | | 19.90 |
| | | | 102 | 5510 | | Chain B | 19.91 |
| | | | 110 | 5550 | | | 19.90 |
| | | | 118 | 5580 | | | 19.94 |
| | | | 126 | 5610 | | | 19.91 |
| | | | 134 | 5670 | | | 19.89 |
| | 802.11ac | 80 | 106 | 5530 | VHT6 | Chain A | 19.87 |
| | | | 122 | 5610 | | | 19.93 |
| | | | 138 | 5690 | | | 19.91 |
| | | | 106 | 5530 | | Chain B | 19.84 |
| | | | 122 | 5610 | | | 19.90 |
| | | | 138 | 5690 | | | 19.93 |


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

| Band | Mode | Bandwidth (MHz) | Channel | Frequency (MHz) | Data Rate | Antenna | Power (dBm) |
|---|---|---|---|---|---|---|---|
| 5800 MHz | 802.11a | 20 | 149 | 5745 | 6 Mbps | Chain A | 20.00 |
| | | | 153 | 5765 | | | 19.92 |
| | | | 157 | 5785 | | | 20.00 |
| | | | 161 | 5805 | | | 19.90 |
| | | | 165 | 5825 | | | 20.00 |
| | | | 149 | 5745 | | Chain B | 20.00 |
| | | | 153 | 5765 | | | 19.91 |
| | | | 157 | 5785 | | | 20.00 |
| | | | 161 | 5805 | | | 19.93 |
| | | | 165 | 5825 | | | 20.00 |
| | 802.11n | 20 | 149 | 5745 | HT8 | Chain A | 19.91 |
| | | | 153 | 5765 | | | 19.90 |
| | | | 157 | 5785 | | | 19.89 |
| | | | 161 | 5805 | | | 19.93 |
| | | | 165 | 5825 | | | 19.88 |
| | | | 149 | 5745 | | Chain B | 19.96 |
| | | | 153 | 5765 | | | 19.91 |
| | | | 157 | 5785 | | | 19.90 |
| | | | 161 | 5805 | | | 19.93 |
| | | | 165 | 5825 | | | 19.97 |
| | 802.11n | 40 | 151 | 5755 | HT8 | Chain A | 19.89 |
| | | | 159 | 5795 | | | 19.85 |
| | | | 151 | 5755 | | Chain B | 19.84 |
| | | | 159 | 5795 | | | 19.87 |
| | 802.11ac | 80 | 155 | 5775 | VHT6 | Chain A | 19.83 |
| | | | | | | Chain B | 19.86 |

| Band | Mode | Channel | Frequency (MHz) | Data Rate | Antenna | Avg Power (dBm) | Tune-up Pwr (dBm) |
|---|---|---|---|---|---|---|---|
| 2450 MHz | Bluetooth v4.0 | 0 | 2402 | Basic Rate GFSK | Chain B | 11.40 | 12.00 |
| | | 39 | 2441 | | | 11.47 | 12.00 |
| | | 78 | 2480 | | | 11.42 | 12.00 |
| | | 0 | 2402 | EDR π/4 DQPSK | | 11.42 | 8.00 |
| | | 39 | 2441 | | | 11.43 | 8.00 |
| | | 78 | 2480 | | | 11.38 | 8.00 |
| | | 0 | 2402 | EDR 8-DPSK | | 11.44 | 8.00 |
| | | 39 | 2441 | | | 11.41 | 8.00 |
| | | 78 | 2480 | | | 11.43 | 8.00 |
| | | 0 | 2402 | Low Energy GFSK | | 8.99 | 12.00 |
| | | 39 | 2441 | | | 8.88 | 12.00 |
| | | 78 | 2480 | | | 8.93 | 12.00 |

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Figure 8.1 Test Reduction Table – 2.4 GHz Main HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11b | Laptop Mode | 1 – 2412 MHz | Reduced[2] |
| | | 6 – 2437 MHz | Tested |
| | | 11 – 2462 MHz | Tested |
| 802.11g | Laptop Mode | 1 – 2412 MHz | Reduced[3] |
| | | 6 – 2437 MHz | Reduced[3] |
| | | 11 – 2462 MHz | Reduced[3] |
| 802.11n | Laptop Mode | 1 – 2412 MHz | Reduced[3] |
| | | 6 – 2437 MHz | Reduced[3] |
| | | 11 – 2462 MHz | Reduced[3] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.
Reduced[3] – When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required per KDB 248227 D01 v02r02 section 5.2.2 2) page 10.

## Figure 8.2 Test Reduction Table – 2.4 GHz Aux HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11b | Laptop Mode | 1 – 2412 MHz | Reduced[2] |
| | | 6 – 2437 MHz | Tested |
| | | 11 – 2462 MHz | Tested |
| 802.11g | Laptop Mode | 1 – 2412 MHz | Reduced[3] |
| | | 6 – 2437 MHz | Reduced[3] |
| | | 11 – 2462 MHz | Reduced[3] |
| 802.11n | Laptop Mode | 1 – 2412 MHz | Reduced[3] |
| | | 6 – 2437 MHz | Reduced[3] |
| | | 11 – 2462 MHz | Reduced[3] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.
Reduced[3] – When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required per KDB 248227 D01 v02r02 section 5.2.2 2) page 10.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Figure 8.3 Test Reduction Table – 5.1 GHz Main HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11a 5150 MHz | Laptop Mode | 36 – 5180 MHz | Reduced[2] |
| | | 40 – 5200 MHz | Tested |
| | | 44 – 5220 MHz | Tested |
| | | 48 – 5240 MHz | Reduced[2] |
| 802.11n 5150 MHz | Laptop Mode | 36 – 5180 MHz | Reduced[2] |
| | | 40 – 5200 MHz | Reduced[2] |
| | | 44 – 5220 MHz | Reduced[2] |
| | | 48 – 5240 MHz | Reduced[2] |
| 802.11ac 5210 MHz | Laptop Mode | 42 – 5210 MHz | Reduced[2] |

Reduced[1] – When the adjusted SAR is ≤ 1.2 W/kg for UNII-2A, SAR is not required for the UNII-1 band with lower or equal maximum output power in that test configuration per KDB 248227 D01 v02 section 5.3.1 2) page 11.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

## Figure 8.4 Test Reduction Table – 5.1 GHz Aux HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11a 5150 MHz | Laptop Mode | 36 – 5180 MHz | Reduced[1] |
| | | 40 – 5200 MHz | Reduced[1] |
| | | 44 – 5220 MHz | Reduced[1] |
| | | 48 – 5240 MHz | Reduced[1] |
| 802.11n 5150 MHz | Laptop Mode | 36 – 5180 MHz | Reduced[1] |
| | | 40 – 5200 MHz | Reduced[1] |
| | | 44 – 5220 MHz | Reduced[1] |
| | | 48 – 5240 MHz | Reduced[1] |
| 802.11ac 5210 MHz | Laptop Mode | 42 – 5210 MHz | Reduced[1] |

Reduced[1] – When the adjusted SAR is ≤ 1.2 W/kg for UNII-2A, SAR is not required for the UNII-1 band with lower or equal maximum output power in that test configuration per KDB 248227 D01 v02 section 5.3.1 2) page 11.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Figure 8.5 Test Reduction Table – 5.2 GHz Main HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11a 5250 MHz | Laptop Mode | 52 – 5260 MHz | Reduced[2] |
| | | 56 – 5280 MHz | Tested |
| | | 60 – 5300 MHz | Tested |
| | | 64 – 5320 MHz | Reduced[2] |
| 802.11n 5250 MHz | Laptop Mode | 52 – 5260 MHz | Reduced[2] |
| | | 56 – 5280 MHz | Reduced[2] |
| | | 60 – 5300 MHz | Reduced[2] |
| | | 64 – 5320 MHz | Reduced[2] |
| 802.11ac 5210 MHz | Laptop Mode | 58 – 5290 MHz | Reduced[2] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

## Figure 8.6 Test Reduction Table – 5.2 GHz Aux HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11a 5250 MHz | Laptop Mode | 52 – 5260 MHz | Reduced[2] |
| | | 56 – 5280 MHz | Tested |
| | | 60 – 5300 MHz | Tested |
| | | 64 – 5320 MHz | Reduced[2] |
| 802.11n 5250 MHz | Laptop Mode | 52 – 5260 MHz | Reduced[2] |
| | | 56 – 5280 MHz | Reduced[2] |
| | | 60 – 5300 MHz | Reduced[2] |
| | | 64 – 5320 MHz | Reduced[2] |
| 802.11ac 5210 MHz | Laptop Mode | 58 – 5290 MHz | Reduced[2] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Figure 8.7 Test Reduction Table – 5.6 GHz Main HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11a 5600 MHz | Laptop Back | 100 – 5500 MHz | Reduced[2] |
| | | 104 – 5520 MHz | Tested |
| | | 108 – 5540 MHz | Reduced[2] |
| | | 112 – 5560 MHz | Reduced[2] |
| | | 116 – 5580 MHz | Tested |
| | | 120 – 5600 MHz | Reduced[2] |
| | | 124 – 5620 MHz | Tested |
| | | 128 – 5640 MHz | Reduced[2] |
| | | 132 – 5660 MHz | Reduced[2] |
| | | 136 – 5680 MHz | Tested |
| | | 140 – 5700 MHz | Reduced[2] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

## Figure 8.8 Test Reduction Table – 5.6 GHz Aux HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11a 5600 MHz | Laptop Back | 100 – 5500 MHz | Reduced[2] |
| | | 104 – 5520 MHz | Reduced[2] |
| | | 108 – 5540 MHz | Reduced[2] |
| | | 112 – 5560 MHz | Reduced[2] |
| | | 116 – 5580 MHz | Tested |
| | | 120 – 5600 MHz | Reduced[2] |
| | | 124 – 5620 MHz | Tested |
| | | 128 – 5640 MHz | Reduced[2] |
| | | 132 – 5660 MHz | Reduced[2] |
| | | 136 – 5680 MHz | Reduced[2] |
| | | 140 – 5700 MHz | Reduced[2] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Figure 8.9 Test Reduction Table – 5.6 GHz Main HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11n 5600 MHz | Laptop Mode | 100 – 5500 MHz | Reduced[2] |
| | | 104 – 5520 MHz | Reduced[2] |
| | | 108 – 5540 MHz | Reduced[2] |
| | | 112 – 5560 MHz | Reduced[2] |
| | | 116 – 5580 MHz | Reduced[2] |
| | | 120 – 5600 MHz | Reduced[2] |
| | | 124 – 5620 MHz | Reduced[2] |
| | | 128 – 5640 MHz | Reduced[2] |
| | | 132 – 5660 MHz | Reduced[2] |
| | | 136 – 5680 MHz | Reduced[2] |
| | | 140 – 5700 MHz | Reduced[2] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

## Figure 8.10 Test Reduction Table – 5.6 GHz Aux HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11n 5600 MHz | Laptop Mode | 100 – 5500 MHz | Reduced[2] |
| | | 104 – 5520 MHz | Reduced[2] |
| | | 108 – 5540 MHz | Reduced[2] |
| | | 112 – 5560 MHz | Reduced[2] |
| | | 116 – 5580 MHz | Reduced[2] |
| | | 120 – 5600 MHz | Reduced[2] |
| | | 124 – 5620 MHz | Reduced[2] |
| | | 128 – 5640 MHz | Reduced[2] |
| | | 132 – 5660 MHz | Reduced[2] |
| | | 136 – 5680 MHz | Reduced[2] |
| | | 140 – 5700 MHz | Reduced[2] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Figure 8.11 Test Reduction Table – 5.6 GHz Main HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11ac 5600 MHz | Laptop Mode | 106 – 5530 MHz | Reduced[2] |
| | | 122 – 5610 MHz | Reduced[2] |
| | | 138 – 5690 MHz | Reduced[2] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

## Figure 8.12 Test Reduction Table – 5.6 GHz Aux Hong Bo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11ac 5600 MHz | Laptop Mode | 106 – 5530 MHz | Reduced[2] |
| | | 122 – 5610 MHz | Reduced[2] |
| | | 138 – 5690 MHz | Reduced[2] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Figure 8.13 Test Reduction Table – 5.8 GHz Main HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11a 5800 MHz | Laptop Mode | 149 – 5745 MHz | Reduced[2] |
| | | 153 – 5765 MHz | Reduced[2] |
| | | 157 – 5785 MHz | Tested |
| | | 161 – 5805 MHz | Reduced[2] |
| | | 165 – 5825 MHz | Tested |
| 802.11n 5800 MHz | Laptop Mode | 149 – 5745 MHz | Reduced[2] |
| | | 153 – 5765 MHz | Reduced[2] |
| | | 157 – 5785 MHz | Reduced[2] |
| | | 161 – 5805 MHz | Reduced[2] |
| | | 165 – 5825 MHz | Reduced[2] |
| 802.11ac 5775 MHz | Laptop Mode | 155 – 5775 MHz | Reduced[2] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.8 W/kg, test the next highest configuration until the SAR value is ≤ 1.2 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

## Figure 8.14 Test Reduction Table – 5.8 GHz Aux HongBo

| Mode | Side | Required Channel | Tested/Reduced |
|---|---|---|---|
| 802.11a 5800 MHz | Laptop Mode | 149 – 5745 MHz | Reduced[2] |
| | | 153 – 5765 MHz | Reduced[2] |
| | | 157 – 5785 MHz | Tested |
| | | 161 – 5805 MHz | Reduced[2] |
| | | 165 – 5825 MHz | Tested |
| 802.11n 5800 MHz | Laptop Mode | 149 – 5745 MHz | Reduced[2] |
| | | 153 – 5765 MHz | Reduced[2] |
| | | 157 – 5785 MHz | Reduced[2] |
| | | 161 – 5805 MHz | Reduced[2] |
| | | 165 – 5825 MHz | Reduced[2] |
| 802.11ac 5775 MHz | Laptop Mode | 155 – 5775 MHz | Reduced[2] |

Reduced[1] – When the reported SAR is ≤ 0.4 W/kg, SAR is not required for the remaining test configuration per KDB 248227 D01 v02r02 section 5.1.1 1) page 9.
Reduced[2] – When the reported SAR is >0.4 W/kg, test the next highest configuration until the SAR value is ≤ 0.8 W/kg per KDB 248227 D01 v02r02 section 5.1.1 3) page 9.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – 2450 MHz Body 802.11b & BT

| MEASUREMENT RESULTS | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Plot | Gap | Antenna | Frequency | | Modulation | Antenna | End Power | Measured SAR (W/kg) | Reported SAR (W/kg) |
| | | | MHz | Ch. | | | (dBm) | | |
| ----- | 0 mm | HongBo | 2437 | 6 | DSSS | Main | 20.00 | 0.889 | 0.89 |
| ----- | | | 2462 | 11 | DSSS | | 19.96 | 0.772 | 0.78 |
| 1 | | | 2437 | 6 | DSSS | Aux | 20.00 | 1.00 | 1.00 |
| ----- | | | 2462 | 11 | DSSS | | 19.96 | 0.992 | 1.00 |
| ----- | | | 2440 | 39 | GFSK | Aux | 11.47 | 0.103 | 0.12 |
| ----- | | Repeated | 2437 | 6 | DSSS | Aux | 20.00 | 0.986 | 0.99 |
| | | | | | | | **Body 1.6 W/kg (mW/g)** averaged over 1 gram | | |

1. Battery is fully charged for all tests.
   Power Measured ☒Conducted ☐ERP ☐EIRP
2. SAR Measurement
   Phantom Configuration ☐Left Head ☒Eli4 ☐Right Head
   SAR Configuration ☐Head ☒Body
3. Test Signal Call Mode ☒Test Code ☐Base Station Simulator
4. Test Configuration ☐With Belt Clip ☐Without Belt Clip ☒N/A
5. Tissue Depth is at least 15.0 cm

Jay M. Moulton
Vice President


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – 5250 MHz Body 802.11a

| MEASUREMENT RESULTS | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Plot | Gap | Antenna | Frequency | | Modulation | Antenna | End Power | Measured SAR (W/kg) | Reported SAR (W/kg) |
| | | | MHz | Ch. | | | (dBm) | | |
| ----- | 0 mm | HongBo | 5200 | 40 | OFDM | Main | 19.97 | 1.11 | 1.12 |
| 2 | | | 5220 | 44 | OFDM | | 20.00 | 1.31 | 1.31 |
| ----- | | | 5280 | 56 | OFDM | | 19.96 | 1.24 | 1.25 |
| ----- | | | 5300 | 60 | OFDM | | 20.00 | 1.26 | 1.26 |
| ----- | | | 5280 | 56 | OFDM | Aux | 19.95 | 0.979 | 0.99 |
| ----- | | | 5300 | 60 | OFDM | | 20.00 | 0.974 | 0.97 |
| ----- | | Repeat | 5220 | 44 | OFDM | Main | 20.00 | 1.29 | 1.29 |
| | | | | | | | **Body 1.6 W/kg (mW/g)** averaged over 1 gram | | |

1. Battery is fully charged for all tests.
   Power Measured ☒Conducted ☐ERP ☐EIRP
2. SAR Measurement
   Phantom Configuration ☐Left Head ☒Eli4 ☐Right Head
   SAR Configuration ☐Head ☒Body
3. Test Signal Call Mode ☒Test Code ☐Base Station Simulator
4. Test Configuration ☐With Belt Clip ☐Without Belt Clip ☒N/A
5. Tissue Depth is at least 15.0 cm

Jay M. Moulton
Vice President


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – 5600 MHz Body 802.11a

| MEASUREMENT RESULTS | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Plot | Gap | Position | Frequency | | Modulation | Antenna | End Power | Measured SAR (W/kg) | Reported SAR (W/kg) |
| | | | MHz | Ch. | | | (dBm) | | |
| ----- | 0 mm | HongBo | 5520 | 104 | OFDM | Main | 20.00 | 1.19 | 1.19 |
| ----- | | | 5580 | 116 | OFDM | | 20.00 | 1.42 | 1.42 |
| ----- | | | 5620 | 124 | OFDM | | 20.00 | 1.43 | 1.43 |
| 3 | | | 5680 | 136 | OFDM | | 20.00 | 1.46 | 1.46 |
| ----- | | | 5580 | 116 | OFDM | Aux | 20.00 | 0.894 | 0.89 |
| ----- | | | 5620 | 124 | OFDM | | 20.00 | 0.658 | 0.66 |
| ----- | | Repeat | 5680 | 136 | OFDM | Main | 20.00 | 1.45 | 1.45 |
| | | | | | | | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram | | |

1. Battery is fully charged for all tests.
   Power Measured ☒Conducted ☐ERP ☐EIRP
2. SAR Measurement
   Phantom Configuration ☐Left Head ☒Eli4 ☐Right Head
   SAR Configuration ☐Head ☒Body
3. Test Signal Call Mode ☒Test Code ☐Base Station Simulator
4. Test Configuration ☐With Belt Clip ☐Without Belt Clip ☒N/A
5. Tissue Depth is at least 15.0 cm

Jay M. Moulton
Vice President


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – 5800 MHz Body 802.11a

| MEASUREMENT RESULTS | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Plot | Gap | Position | Frequency | | Modulation | Antenna | End Power | Measured SAR (W/kg) | Reported SAR (W/kg) |
| | | | MHz | Ch. | | | (dBm) | | |
| 4 | 0 mm | HongBo | 5785 | 157 | OFDM | Main | 20.00 | 1.19 | 1.19 |
| ----- | | | 5825 | 165 | OFDM | | 20.00 | 1.11 | 1.11 |
| ----- | | | 5785 | 157 | OFDM | Aux | 20.00 | 0.449 | 0.45 |
| ----- | | | 5825 | 165 | OFDM | | 20.00 | 0.348 | 0.35 |
| ----- | | Repeated | 5785 | 157 | OFDM | Main | 20.00 | 1.17 | 1.17 |
| | | | | | | | **Body 1.6 W/kg (mW/g)** averaged over 1 gram | | |

1. Battery is fully charged for all tests.
   Power Measured ☒Conducted ☐ERP ☐EIRP
2. SAR Measurement
   Phantom Configuration ☐Left Head ☒Eli4 ☐Right Head
   SAR Configuration ☐Head ☒Body
3. Test Signal Call Mode ☒Test Code ☐Base Station Simulator
4. Test Configuration ☐With Belt Clip ☐Without Belt Clip ☒N/A
5. Tissue Depth is at least 15.0 cm

Jay M. Moulton
Vice President


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – Simultaneous Evaluation

| MEASUREMENT RESULTS | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Frequency | | Modulation | Frequency | | Modulation | $SAR_1$ | $SAR_2$ | SAR Total |
| MHz | Ch. | | MHz | Ch. | | | | |
| 2437 | 6 | DSSS | 2440 | 39 | GFSK | 0.89 | 0.12 | 1.01 |
| 5200 | 44 | OFDM | 2440 | 39 | GFSK | 1.31 | 0.12 | 1.43 |
| 5680 | 136 | OFDM | 2440 | 39 | GFSK | 1.46 | 0.12 | 1.58 |
| 5785 | 157 | OFDM | 2440 | 39 | GFSK | 1.19 | 0.12 | 1.31 |
| | | | | | | **Body 1.6 W/kg (mW/g)** averaged over 1 gram | | |

The sum of the two transmitters is less than the limit; therefore, the simultaneous transmission meets the requirements of KDB447498 D01 v06 section 4.3.2 page 11.

| MEASUREMENT RESULTS - MIMO | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Frequency | | Modulation | Frequency | | Modulation | $SAR_1$ - Main | $SAR_2$ - Aux | SAR Total |
| MHz | Ch. | | MHz | Ch. | | | | |
| 2437 | 6 | DSSS | 2437 | 6 | DSSS | 0.89 | 1.00 | 1.89 |
| 5200 | 44 | OFDM | 5280 | 56 | OFDM | 1.31 | 0.99 | 2.30 |
| 5680 | 136 | OFDM | 5580 | 116 | OFDM | 1.46 | 0.89 | 2.35 |
| 5785 | 157 | OFDM | 5785 | 157 | OFDM | 1.19 | 0.45 | 1.64 |
| | | | | | | **Body 1.6 W/kg (mW/g)** averaged over 1 gram | | |

In MIMO mode, the worst case condition is in the 5.6 GHz band. The main and aux antennas are a minimum of 90.9 mm apart. Using the highest reported SAR to calculate the simultaneous Tx using peak separation ratio, the highest ratio would be 0.04 which meets the requirements of KDB 447498 section 4.3.2 3) on page 13. The calculation is shown below.

Simultaneous Separation Ratio Calculation

$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04$ rounded to two digits

$(1.46 + 0.89)^{1.5}/90.9 = 0.04$


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 9. Test Equipment List

**Table 9.1 Equipment Specifications**

| Type | Calibration Due Date | Calibration Done Date | Serial Number |
|---|---|---|---|
| Staubli Robot TX60L | N/A | N/A | F07/55M6A1/A/01 |
| Measurement Controller CS8c | N/A | N/A | 1012 |
| ELI4 Flat Phantom | N/A | N/A | 1065 |
| Device Holder | N/A | N/A | N/A |
| Data Acquisition Electronics 4 | 08/21/2018 | 08/21/2017 | 759 |
| SPEAG E-Field Probe EX3DV4 | 08/18/2018 | 08/18/2017 | 3693 |
| Speag Validation Dipole D2450V2 | 08/10/2018 | 08/10/2015 | 881 |
| Speag Validation Dipole D5GHzV2 | 08/11/2018 | 08/11/2015 | 1119 |
| Agilent N1911A Power Meter | 05/20/2019 | 03/20/2017 | GB45100254 |
| Agilent N1922A Power Sensor | 06/21/2019 | 06/21/2017 | MY45240464 |
| Advantest R3261A Spectrum Analyzer | 03/26/2019 | 03/20/2017 | 31720068 |
| Agilent (HP) 8350B Signal Generator | 03/26/2019 | 03/20/2017 | 2749A10226 |
| Agilent (HP) 83525A RF Plug-In | 03/26/2019 | 03/20/2017 | 2647A01172 |
| Agilent (HP) 8753C Vector Network Analyzer | 03/26/2019 | 03/20/2017 | 3135A01724 |
| Agilent (HP) 85047A S-Parameter Test Set | 03/26/2019 | 03/20/2017 | 2904A00595 |
| Agilent (HP) 8960 Base Station Sim. | 03/30/2019 | 03/30/2017 | MY48360364 |
| Anritsu MT8820C | 07/27/2019 | 07/27/2017 | 6201176199 |
| Agilent 778D Dual Directional Coupler | N/A | N/A | MY48220184 |
| MiniCircuits BW-N20W5+ Fixed 20 dB Attenuator | N/A | N/A | N/A |
| MiniCircuits SPL-10.7+ Low Pass Filter | N/A | N/A | R8979513746 |
| Aprel Dielectric Probe Assembly | N/A | N/A | 0011 |
| Body Equivalent Matter (2450 MHz) | N/A | N/A | N/A |
| Body Equivalent Matter (5 GHz) | N/A | N/A | N/A |

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 10. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC/IC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

© 2018 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 11. References

[1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996

[2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.

[3] ANSI/IEEE C95.3 – 1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.

[4] International Electrotechnical Commission, IEC 62209-2 (Edition 1.0), Human Exposure to radio frequency fields from hand-held and body mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), March 2010.

[5] IEEE Standard 1528 – 2013, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013.

[6] Industry Canada, RSS – 102 Issue 5, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2015.

[7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# Appendix A – System Validation Plots and Data

```
************************************************************
Test Result for UIM Dielectric Parameter
Fri 29/Jun/2018
Freq   Frequency(GHz)
FCC_eH Limits for Head Epsilon
FCC_sH Limits for Head Sigma
FCC_eB Limits for Body Epsilon
FCC_sB Limits for Body Sigma
Test_e Epsilon  of  UIM
Test_s Sigma of UIM
************************************************************
Freq          FCC_eB FCC_sB Test_e Test_s
2.4100        52.75  1.91   52.61  1.92
2.4120        52.748 1.912  52.606 1.922*
2.4200        52.74  1.92   52.59  1.93
2.4300        52.73  1.93   52.57  1.94
2.4370        52.716 1.937  52.556 1.947*
2.4400        52.71  1.94   52.55  1.95
2.4500        52.70  1.95   52.53  1.96
2.4600        52.69  1.96   52.51  1.98
2.4620        52.686 1.964  52.508 1.982*
2.4700        52.67  1.98   52.50  1.99
2.4800        52.66  1.99   52.48  2.00

* value interpolated
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
************************************************************
Test Result for UIM Dielectric Parameter
Fri 29/Jun/2018
Freq   Frequency(GHz)
FCC_eH Limits for Head Epsilon
FCC_sH Limits for Head Sigma
FCC_eB Limits for Body Epsilon
FCC_sB Limits for Body Sigma
Test_e Epsilon  of  UIM
Test_s Sigma of UIM
************************************************************
```

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|---|---|---|---|---|
| 5.1000 | 49.15 | 5.18 | 49.19 | 5.14 |
| 5.1200 | 49.12 | 5.21 | 49.16 | 5.17 |
| 5.1400 | 49.10 | 5.23 | 49.13 | 5.20 |
| 5.1600 | 49.07 | 5.25 | 49.10 | 5.23 |
| 5.1800 | 49.04 | 5.28 | 49.07 | 5.26 |
| 5.2000 | 49.01 | 5.30 | 49.04 | 5.29 |
| 5.2100 | 49.00 | 5.31 | 49.035 | 5.30* |
| 5.2200 | 48.99 | 5.32 | 49.03 | 5.31 |
| 5.2400 | 48.96 | 5.35 | 49.00 | 5.34 |
| 5.2600 | 48.93 | 5.37 | 48.98 | 5.37 |
| 5.2800 | 48.91 | 5.39 | 48.95 | 5.39 |
| 5.2900 | 48.895 | 5.405 | 48.935 | 5.405* |
| 5.3000 | 48.88 | 5.42 | 48.92 | 5.42 |
| 5.3200 | 48.85 | 5.44 | 48.90 | 5.45 |
| 5.3400 | 48.82 | 5.46 | 48.87 | 5.48 |
| 5.3600 | 48.80 | 5.49 | 48.84 | 5.49 |
| 5.3800 | 48.77 | 5.51 | 48.81 | 5.50 |
| 5.4000 | 48.74 | 5.53 | 48.78 | 5.52 |
| 5.4200 | 48.72 | 5.56 | 48.75 | 5.55 |
| 5.4400 | 48.69 | 5.58 | 48.72 | 5.57 |
| 5.4600 | 48.66 | 5.60 | 48.69 | 5.60 |
| 5.4800 | 48.63 | 5.63 | 48.66 | 5.62 |
| 5.5000 | 48.61 | 5.65 | 48.63 | 5.64 |
| 5.5200 | 48.58 | 5.67 | 48.61 | 5.66 |
| 5.5400 | 48.55 | 5.70 | 48.58 | 5.69 |
| 5.5600 | 48.53 | 5.72 | 48.55 | 5.71 |
| 5.5800 | 48.50 | 5.74 | 48.52 | 5.73 |
| 5.6000 | 48.47 | 5.77 | 48.49 | 5.76 |
| 5.6100 | 48.455 | 5.78 | 48.475 | 5.77* |
| 5.6200 | 48.44 | 5.79 | 48.46 | 5.78 |
| 5.6400 | 48.42 | 5.81 | 48.43 | 5.80 |
| 5.6600 | 48.39 | 5.84 | 48.40 | 5.82 |
| 5.6800 | 48.36 | 5.86 | 48.37 | 5.84 |
| 5.7000 | 48.34 | 5.88 | 48.34 | 5.87 |
| 5.7200 | 48.31 | 5.91 | 48.31 | 5.89 |
| 5.7400 | 48.28 | 5.93 | 48.28 | 5.92 |
| 5.7450 | 48.273 | 5.935 | 48.273 | 5.925* |
| 5.7600 | 48.25 | 5.95 | 48.25 | 5.94 |
| 5.7750 | 48.235 | 5.973 | 48.228 | 5.963* |
| 5.7800 | 48.23 | 5.98 | 48.22 | 5.97 |
| 5.7850 | 48.223 | 5.985 | 48.213 | 5.978* |
| 5.8000 | 48.20 | 6.00 | 48.19 | 6.00 |
| 5.8200 | 48.17 | 6.02 | 48.16 | 6.02 |
| 5.8250 | 48.165 | 6.028 | 48.153 | 6.025* |
| 5.8400 | 48.15 | 6.05 | 48.13 | 6.04 |

* value interpolated


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# RF Exposure Lab

## Plot 1

### DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN: 881

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: MSL2450; Medium parameters used: f = 2450 MHz; $\sigma$ = 1.96 S/m; $\varepsilon_r$ = 52.53; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section

Test Date: Date: 6/29/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3693; ConvF(7.26, 7.26, 7.26); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**Body Verification/2450 MHz/Area Scan (61x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 8.93 W/kg

**Body Verification/2450 MHz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 53.517 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 11.09 W/kg
$P_{in}$= 100 mW
**SAR(1 g) = 5.28 W/kg; SAR(10 g) = 2.91 W/kg**
Maximum value of SAR (measured) = 8.84 W/kg

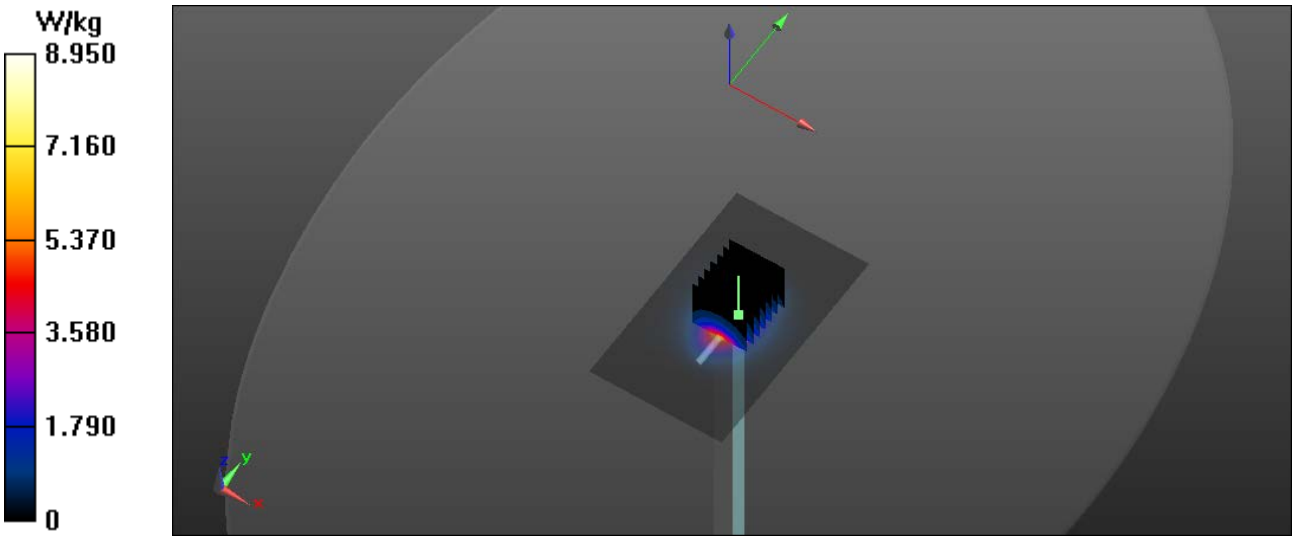



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

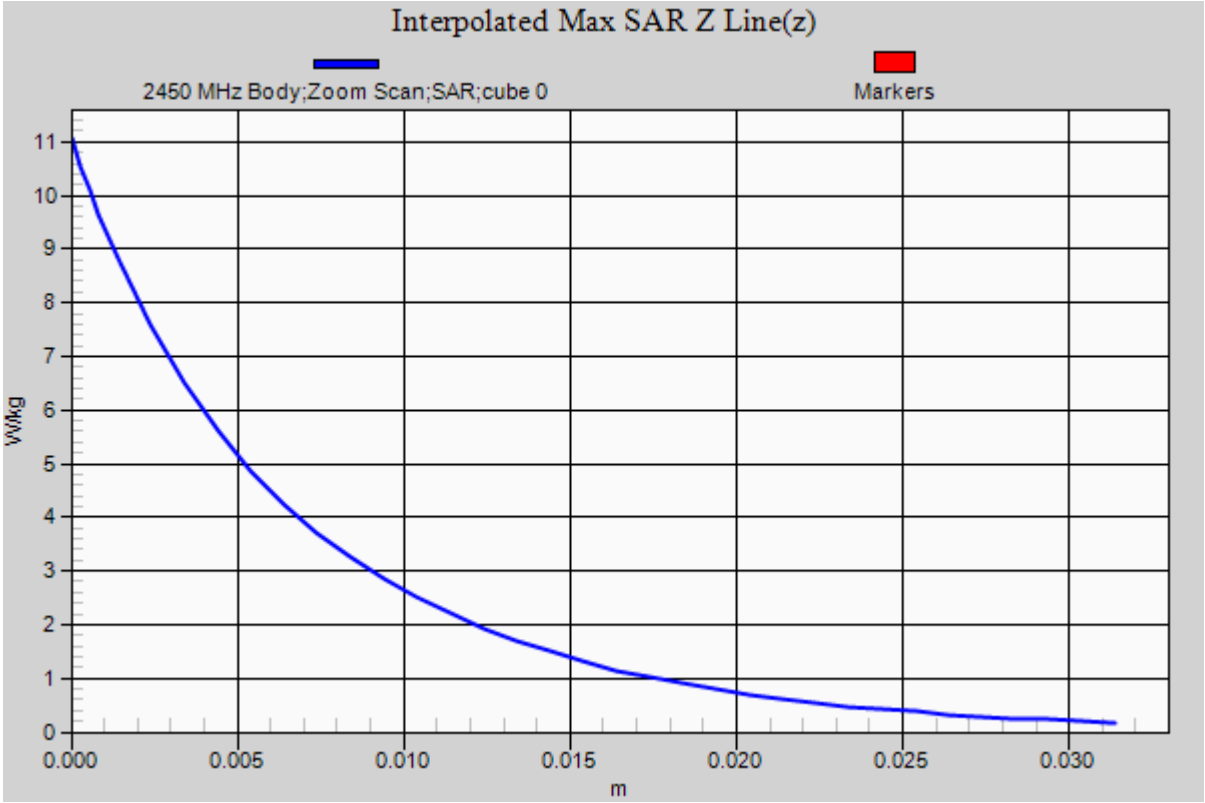



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# RF Exposure Lab

## Plot 2

### DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1119

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: f = 5200 MHz; $\sigma$ = 5.29 S/m; $\varepsilon_r$ = 49.04; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section

Test Date: Date: 6/29/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3693; ConvF(4.7, 4.7, 4.7); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**Body Verification/5200 MHz/Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.89 W/kg

**Body Verification/5200 MHz/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 12.708 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 3.21 W/kg
Pin=10 mW
**SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.224 W/kg**
Maximum value of SAR (measured) = 1.89 W/kg

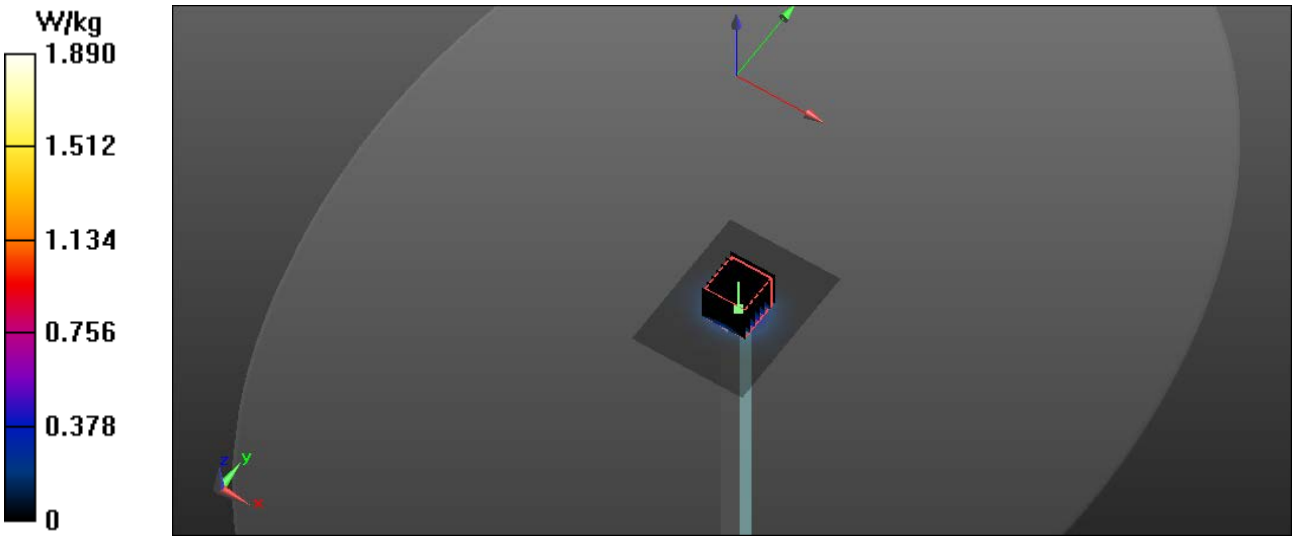



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

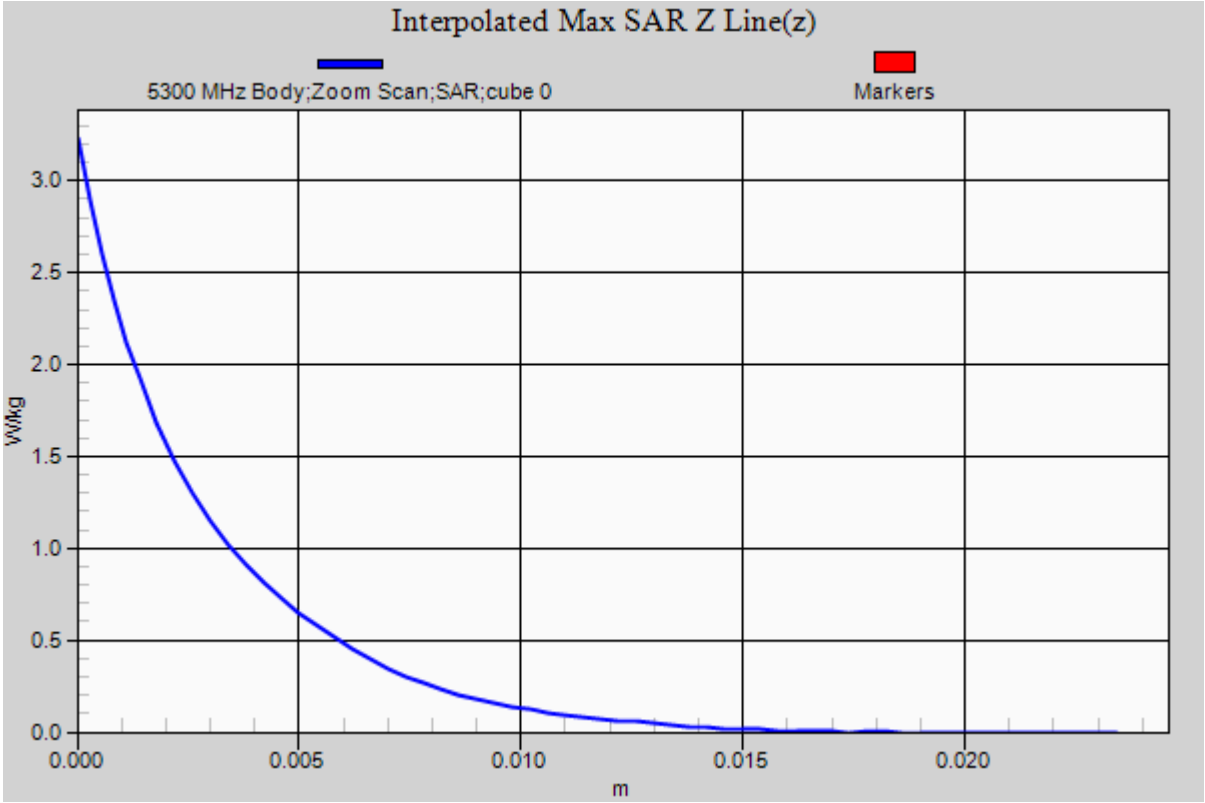



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# RF Exposure Lab

## Plot 3

### DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1119

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: f = 5600 MHz; $\sigma$ = 5.76 S/m; $\varepsilon_r$ = 48.49; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section

Test Date: Date: 6/29/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3693; ConvF(4, 4, 4); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**Body Verification/5600 MHz/Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.02 W/kg

**Body Verification/5600 MHz/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 13.297 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 3.32 W/kg
Pin=10 mW
**SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.228 W/kg**
Maximum value of SAR (measured) = 2.02 W/kg

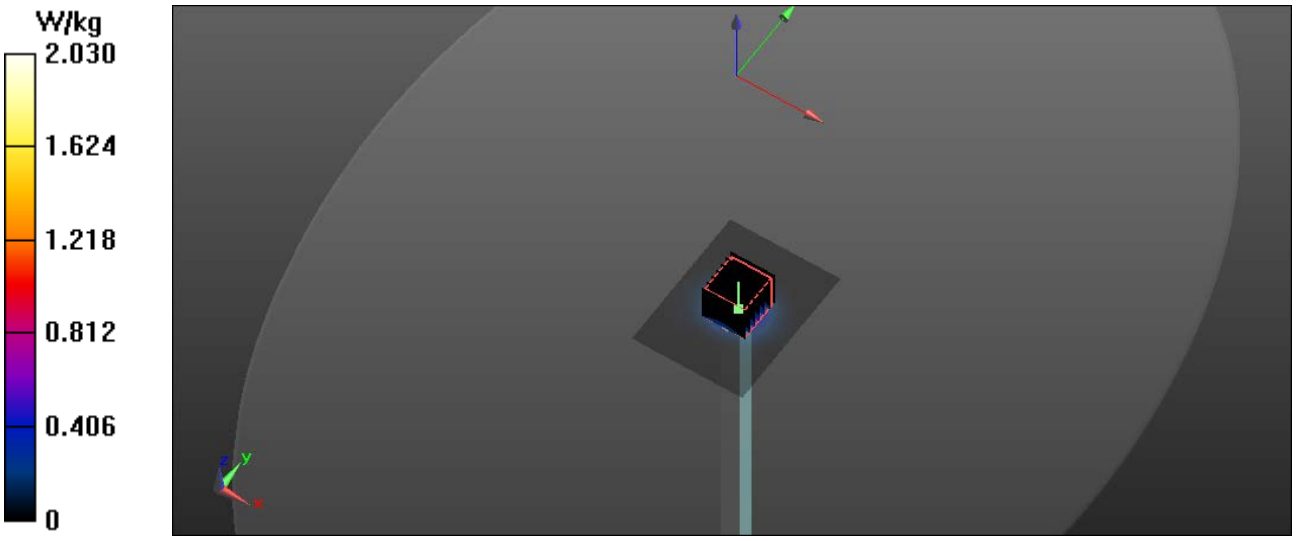



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

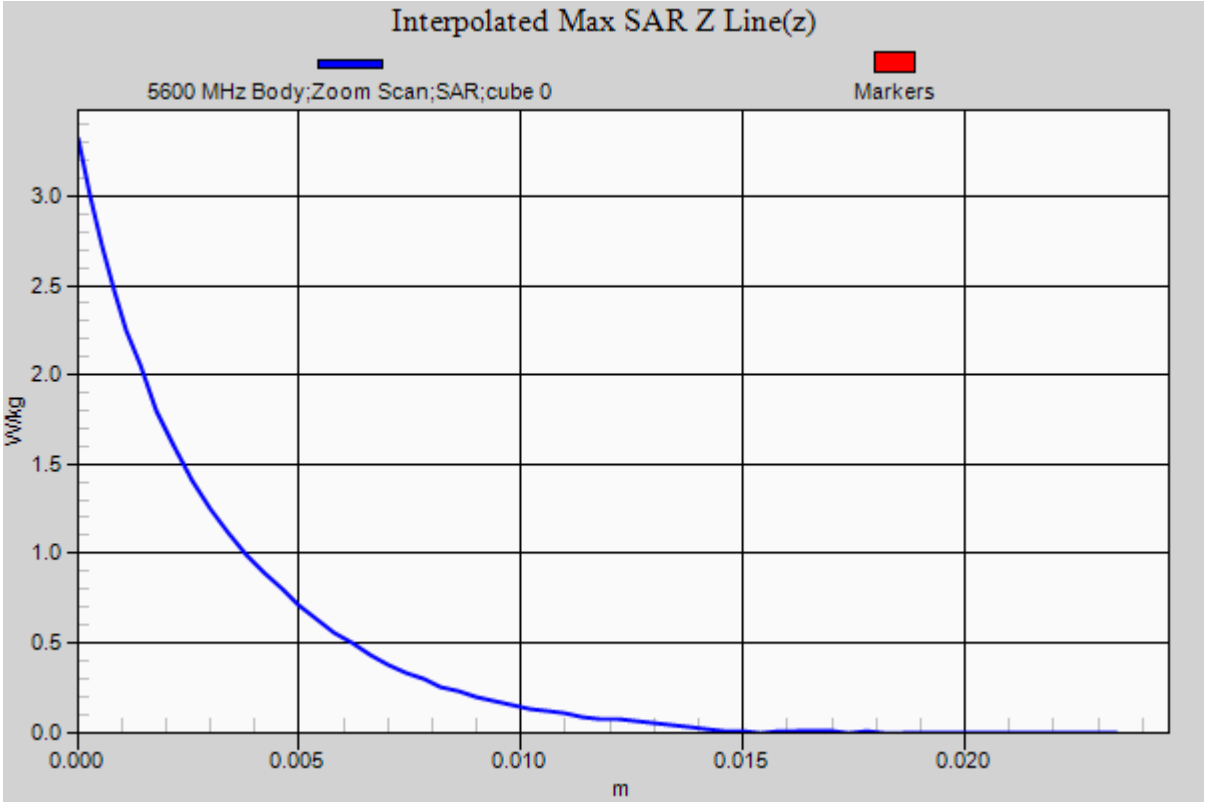



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# RF Exposure Lab

## Plot 4

### DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1119

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: f = 5800 MHz; $\sigma$ = 6 S/m; $\varepsilon_r$ = 48.19; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section

Test Date: Date: 6/29/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3693; ConvF(4.21, 4.21, 4.21); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**Body Verification/5800 MHz/Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.76 W/kg

**Body Verification/5800 MHz/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 12.402 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 2.88 W/kg
Pin=10 mW
**SAR(1 g) = 0.787 W/kg; SAR(10 g) = 0.222 W/kg**
Maximum value of SAR (measured) = 1.78 W/kg

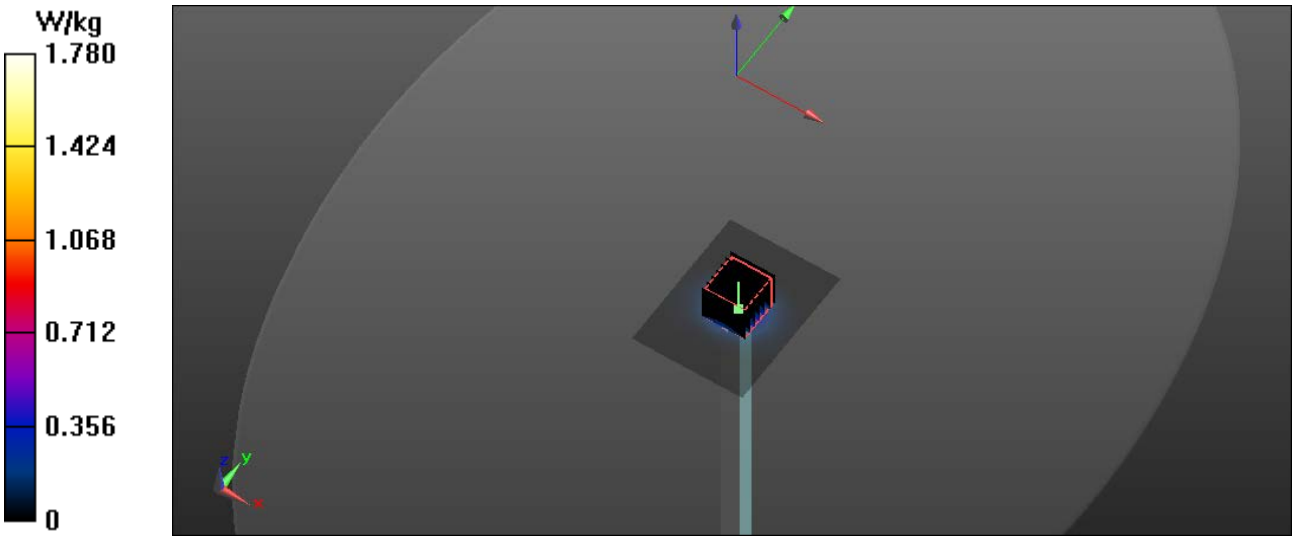



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

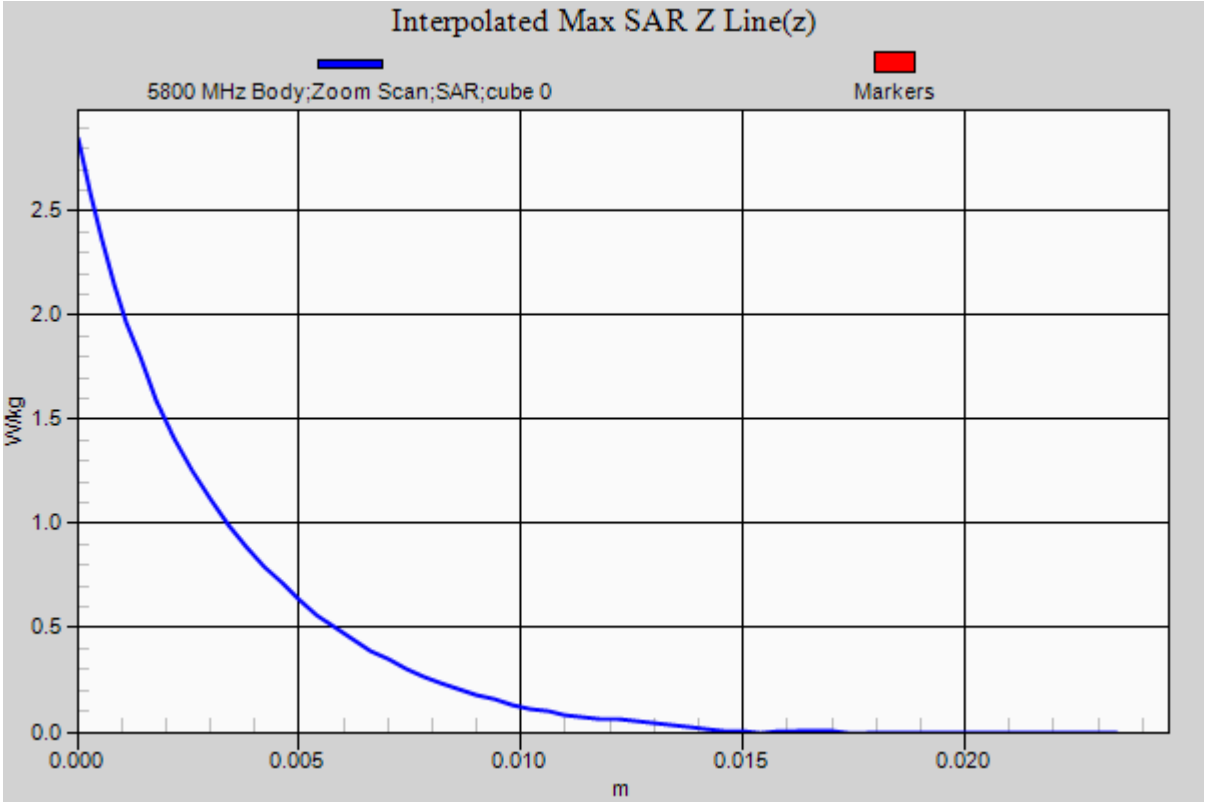



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# Appendix B – SAR Test Data Plots


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# RF Exposure Lab

## Plot 1

### DUT: HP Longhaul; Type: Laptop; Serial: Eng 1

Communication System: WiFi 802.11b (DSSS, 1 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: MSL2450; Medium parameters used (interpolated): f = 2437 MHz; $\sigma$ = 1.947 S/m; $\varepsilon_r$ = 52.556; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section

Test Date: Date: 6/29/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.26, 7.26, 7.26); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**2450 MHz HongBo/Laptop Tx2 Mid/Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.39 W/kg

**2450 MHz HongBo/Laptop Tx2 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.481 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 2.28 W/kg
**SAR(1 g) = 1 W/kg**

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.69 W/kg

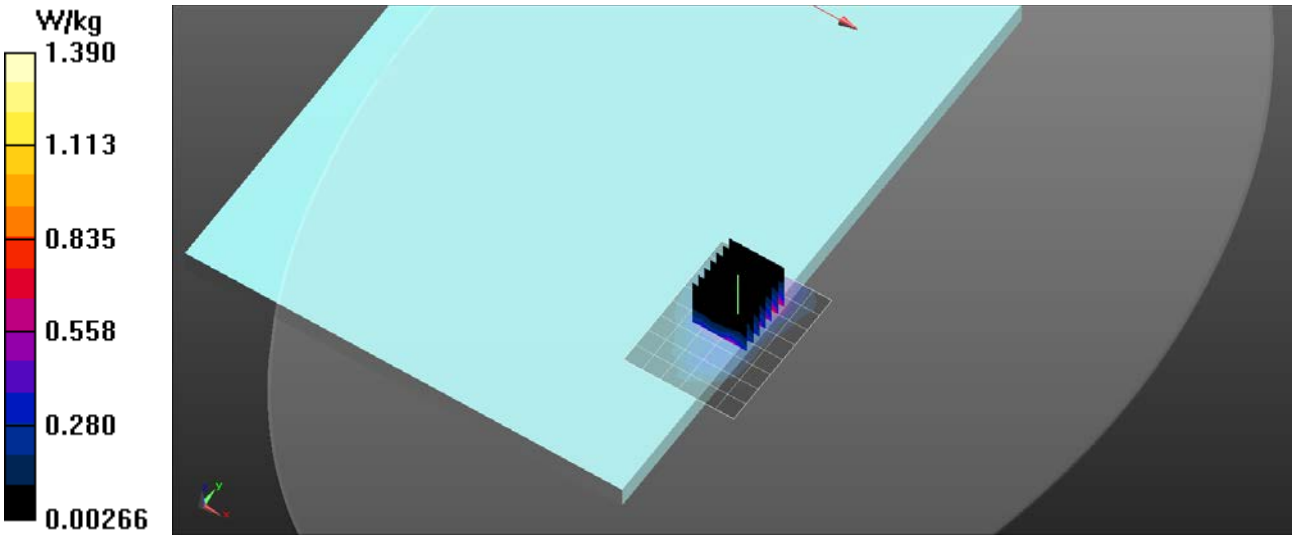



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# RF Exposure Lab

## Plot 2

### DUT: HP Longhaul; Type: Laptop; Serial: Eng 1

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5220 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: f = 5220 MHz; $\sigma$ = 5.31 S/m; $\varepsilon_r$ = 49.03; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section

Test Date: Date: 7/2/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(4.7, 4.7, 4.7); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**5200 MHz HongBo/Laptop Tx1 44/Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.82 W/kg

**5200 MHz HongBo/Laptop Tx1 44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 5.49 W/kg
**SAR(1 g) = 1.31 W/kg**
Maximum value of SAR (measured) = 2.92 W/kg

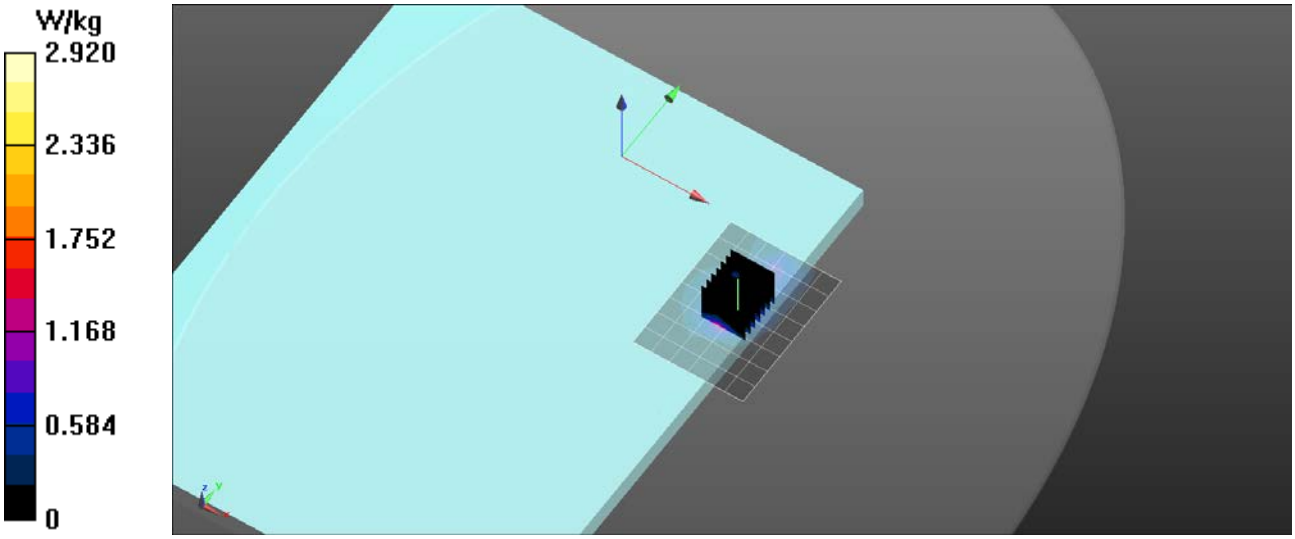



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# RF Exposure Lab

## Plot 3

### DUT: HP Longhaul; Type: Laptop; Serial: Eng 1

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5680 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: f = 5680 MHz; $\sigma$ = 5.84 S/m; $\varepsilon_r$ = 48.37; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section

Test Date: Date: 7/2/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(4, 4, 4); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**5600 MHz HongBo/Laptop Tx1 136/Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.51 W/kg

**5600 MHz HongBo/Laptop Tx1 136/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 6.30 W/kg
**SAR(1 g) = 1.46 W/kg**
Maximum value of SAR (measured) = 3.13 W/kg

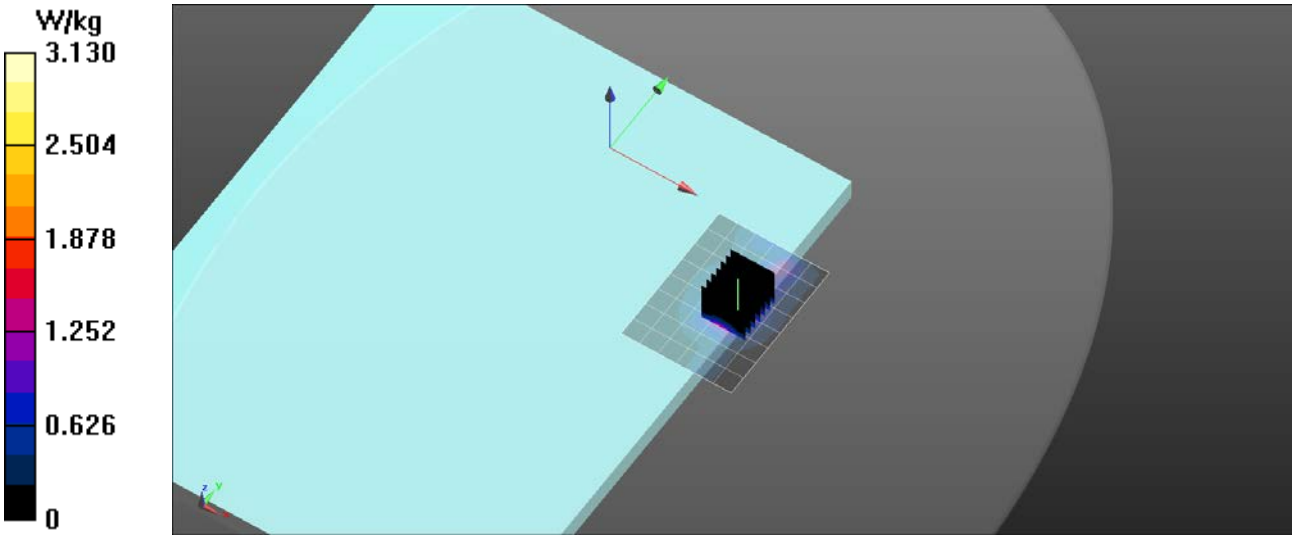



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# RF Exposure Lab

## Plot 4

### DUT: HP Longhaul; Type: Laptop; Serial: Eng 1

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used (interpolated): f = 5785 MHz; $\sigma$ = 5.978 S/m; $\varepsilon_r$ = 48.213; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section

Test Date: Date: 7/2/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(4.21, 4.21, 4.21); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**5800 MHz HongBo/Laptop Tx1 157/Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.92 W/kg

**5800 MHz HongBo/Laptop Tx1 157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 5.74 W/kg
**SAR(1 g) = 1.19 W/kg**

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 2.42 W/kg

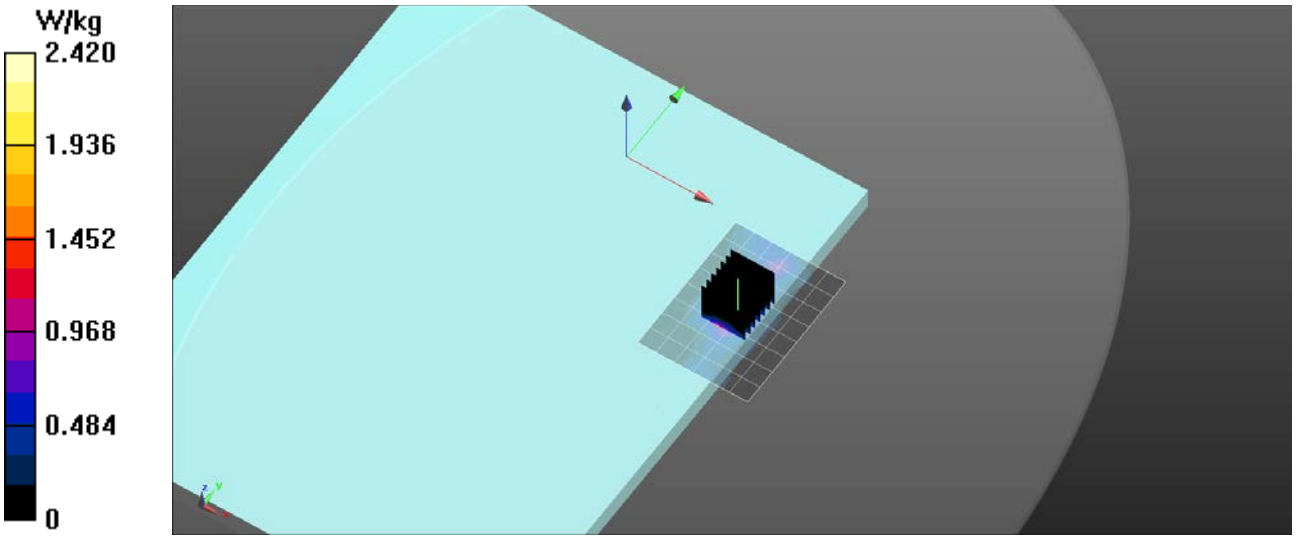



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# Appendix D – Probe Calibration Data Sheets


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

Jm

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
**Zeughausstrasse 43, 8004 Zurich, Switzerland**

**S** Schweizerischer Kalibrierdienst
**C** Service suisse d'étalonnage
Servizio svizzero di taratura
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates**

**Accreditation No.: SCS 0108**

**Client** RF Exposure Lab

**Certificate No: EX3-3693_Aug17**

# CALIBRATION CERTIFICATE

| | |
|---|---|
| Object | EX3DV4 - SN:3693 |
| Calibration procedure(s) | QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6<br>Calibration procedure for dosimetric E-field probes |
| Calibration date: | August 18, 2017 |

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02525) | Apr-18 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Reference Probe ES3DV2 | SN: 3013 | 31-Dec-16 (No. ES3-3013_Dec16) | Dec-17 |
| DAE4 | SN: 660 | 7-Dec-16 (No. DAE4-660_Dec16) | Dec-17 |
| | | | |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: August 22, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

## Glossary:

| | |
|---|---|
| TSL | tissue simulating liquid |
| NORMx,y,z | sensitivity in free space |
| ConvF | sensitivity in TSL / NORMx,y,z |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., ϑ = 0 is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

## Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, ", "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- *NORMx,y,z:* Assessed for E-field polarization ϑ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the $E^2$-field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)x,y,z = NORMx,y,z * frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCPx,y,z:* DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR:* PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters:* Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORMx,y,z * ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORMx* (no uncertainty required).

# Probe EX3DV4

# SN:3693

Manufactured: April 22, 2009
Calibrated: August 18, 2017

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

## Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|---|---|---|---|
| Norm ($\mu V/(V/m)^2$)[A] | 0.39 | 0.32 | 0.35 | ± 10.1 % |
| DCP (mV)[B] | 95.1 | 97.9 | 107.8 | |

## Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB$\sqrt{\mu V}$ | C | D dB | VR mV | Unc[E] (k=2) |
|---|---|---|---|---|---|---|---|---|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 153.2 | ±3.5 % |
| | | Y | 0.0 | 0.0 | 1.0 | | 144.5 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 151.4 | |

Note: For details on UID parameters see Appendix.

## Sensor Model Parameters

| | C1 fF | C2 fF | α $V^{-1}$ | T1 $ms.V^{-2}$ | T2 $ms.V^{-1}$ | T3 ms | T4 $V^{-2}$ | T5 $V^{-1}$ | T6 |
|---|---|---|---|---|---|---|---|---|---|
| X | 33.42 | 257.2 | 37.63 | 9.549 | 1.014 | 5.071 | 0 | 0.481 | 1.008 |
| Y | 36.13 | 269.4 | 35.53 | 11.22 | 0.702 | 5.041 | 0.308 | 0.41 | 1.005 |
| Z | 28.36 | 204.6 | 33.61 | 4.581 | 0.465 | 5.032 | 0.705 | 0.298 | 1.004 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

[A] The uncertainties of Norm X,Y,Z do not affect the $E^2$-field uncertainty inside TSL (see Pages 5 and 6).
[B] Numerical linearization parameter: uncertainty not required.
[E] Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

## Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) [C] | Relative Permittivity [F] | Conductivity (S/m) [F] | ConvF X | ConvF Y | ConvF Z | Alpha [G] | Depth [G] (mm) | Unc (k=2) |
|---|---|---|---|---|---|---|---|---|
| 150 | 52.3 | 0.76 | 11.31 | 11.31 | 11.31 | 0.00 | 1.00 | ± 13.3 % |
| 220 | 49.0 | 0.81 | 10.54 | 10.54 | 10.54 | 0.00 | 1.00 | ± 13.3 % |
| 450 | 43.5 | 0.87 | 9.78 | 9.78 | 9.78 | 0.13 | 1.60 | ± 13.3 % |
| 750 | 41.9 | 0.89 | 9.55 | 9.55 | 9.55 | 0.36 | 1.03 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.15 | 8.15 | 8.15 | 0.28 | 0.85 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 7.85 | 7.85 | 7.85 | 0.30 | 0.85 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 7.44 | 7.44 | 7.44 | 0.38 | 0.85 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.05 | 7.05 | 7.05 | 0.31 | 0.84 | ± 12.0 % |
| 5200 | 36.0 | 4.66 | 5.09 | 5.09 | 5.09 | 0.35 | 1.80 | ± 13.1 % |
| 5300 | 35.9 | 4.76 | 4.83 | 4.83 | 4.83 | 0.35 | 1.80 | ± 13.1 % |
| 5500 | 35.6 | 4.96 | 4.85 | 4.85 | 4.85 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.70 | 4.70 | 4.70 | 0.40 | 1.80 | ± 13.1 % |
| 5800 | 35.3 | 5.27 | 4.65 | 4.65 | 4.65 | 0.40 | 1.80 | ± 13.1 % |

[C] Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

## Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) [C] | Relative Permittivity [F] | Conductivity (S/m) [F] | ConvF X | ConvF Y | ConvF Z | Alpha [G] | Depth [G] (mm) | Unc (k=2) |
|---|---|---|---|---|---|---|---|---|
| 150 | 61.9 | 0.80 | 10.76 | 10.76 | 10.76 | 0.00 | 1.00 | ± 13.3 % |
| 220 | 60.2 | 0.86 | 10.08 | 10.08 | 10.08 | 0.00 | 1.00 | ± 13.3 % |
| 450 | 56.7 | 0.94 | 10.19 | 10.19 | 10.19 | 0.10 | 1.30 | ± 13.3 % |
| 750 | 55.5 | 0.96 | 9.35 | 9.35 | 9.35 | 0.50 | 0.85 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 7.77 | 7.77 | 7.77 | 0.37 | 0.85 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 7.54 | 7.54 | 7.54 | 0.30 | 0.96 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 7.41 | 7.41 | 7.41 | 0.38 | 0.84 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.26 | 7.26 | 7.26 | 0.34 | 0.89 | ± 12.0 % |
| 5200 | 49.0 | 5.30 | 4.70 | 4.70 | 4.70 | 0.35 | 1.90 | ± 13.1 % |
| 5300 | 48.9 | 5.42 | 4.46 | 4.46 | 4.46 | 0.40 | 1.90 | ± 13.1 % |
| 5500 | 48.6 | 5.65 | 4.04 | 4.04 | 4.04 | 0.40 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 4.00 | 4.00 | 4.00 | 0.40 | 1.90 | ± 13.1 % |
| 5800 | 48.2 | 6.00 | 4.21 | 4.21 | 4.21 | 0.40 | 1.90 | ± 13.1 % |

[C] Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

[F] At frequencies below 3 GHz, the validity of tissue parameters ($\varepsilon$ and $\sigma$) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ($\varepsilon$ and $\sigma$) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

# Frequency Response of E-Field

## (TEM-Cell:ifi110 EXX, Waveguide: R22)

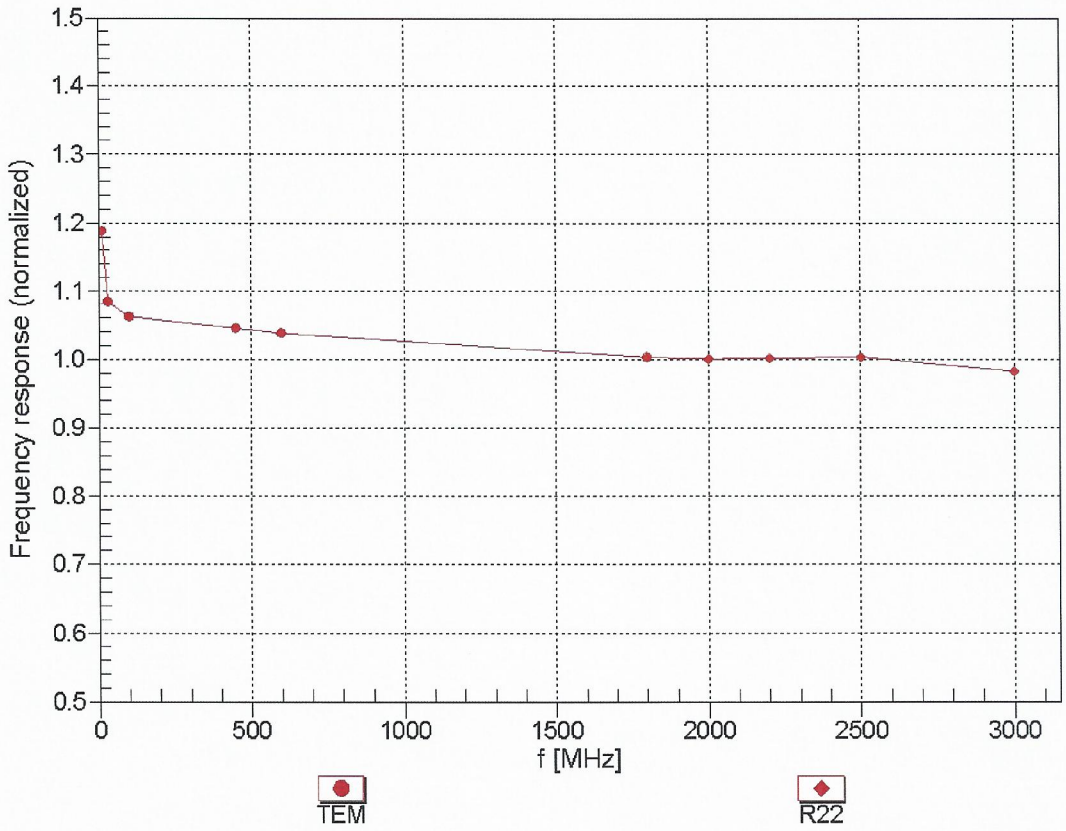


**Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)**

# Receiving Pattern (ϕ), ϑ = 0°

f=600 MHz,TEM

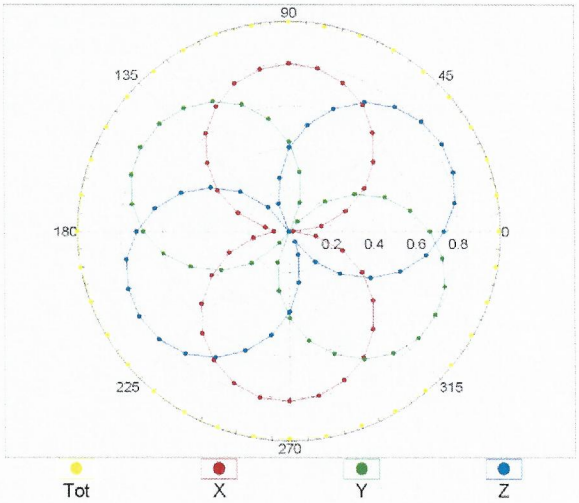


f=1800 MHz,R22

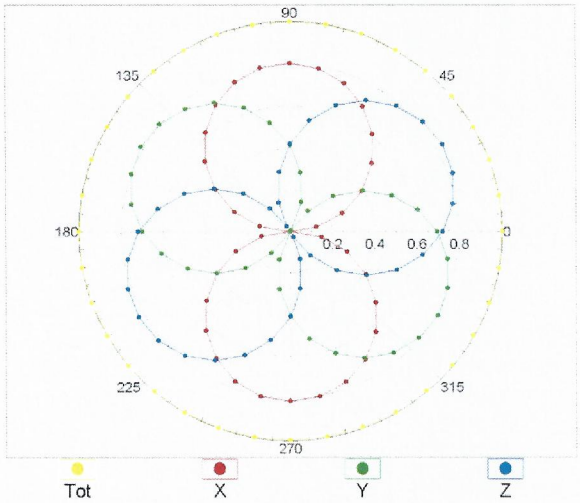


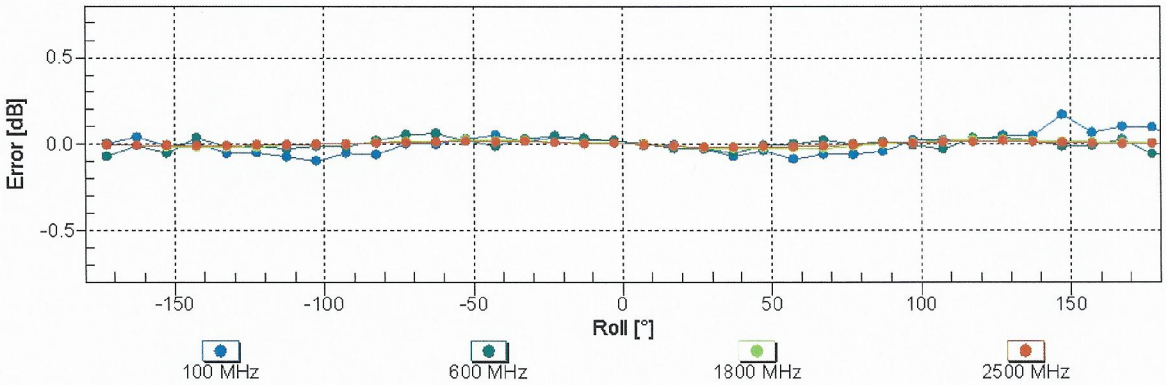


**Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)**

# Dynamic Range f($SAR_{head}$)

**(TEM cell , $f_{eval}$= 1900 MHz)**

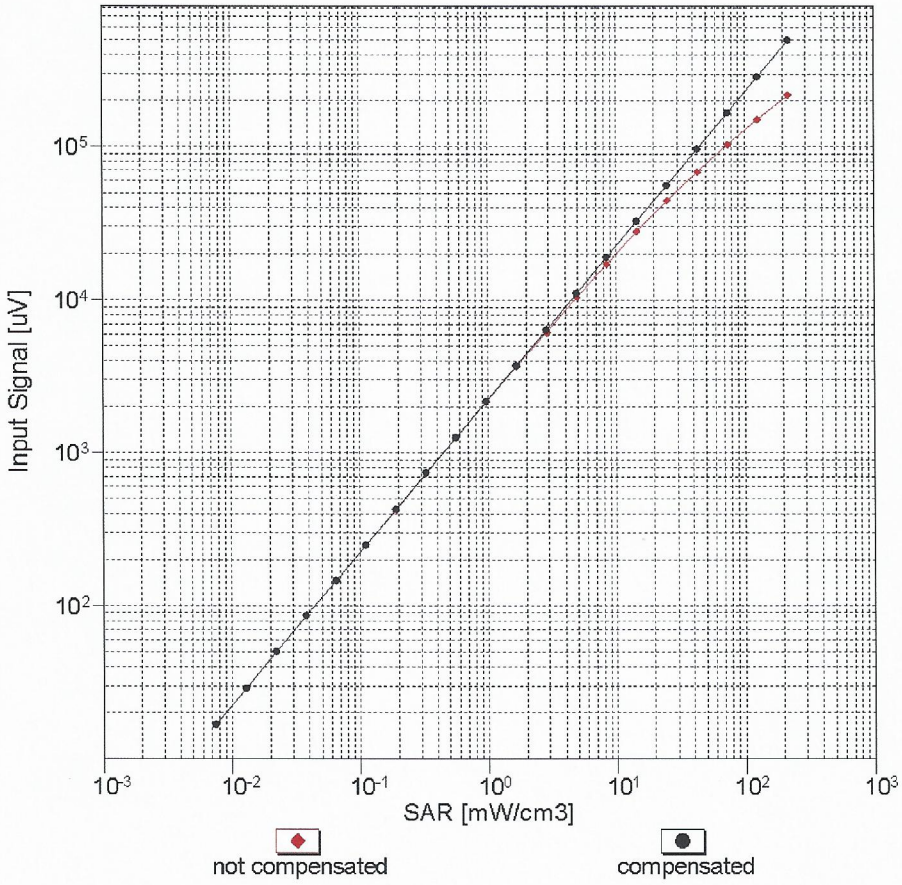


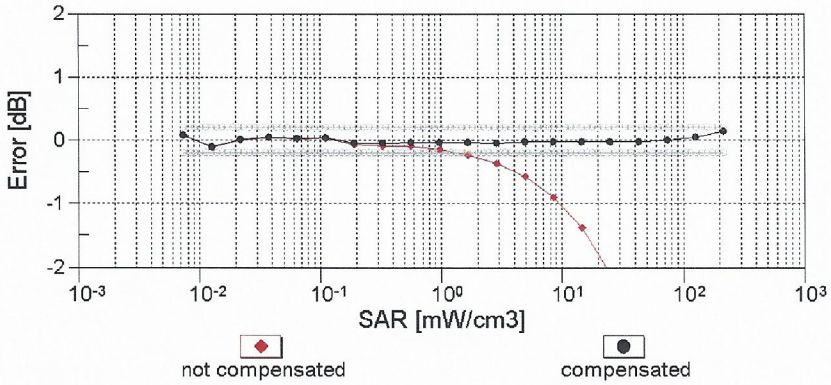


**Uncertainty of Linearity Assessment: ± 0.6% (k=2)**

# Conversion Factor Assessment

f = 750 MHz,WGLS R9 (H_convF)

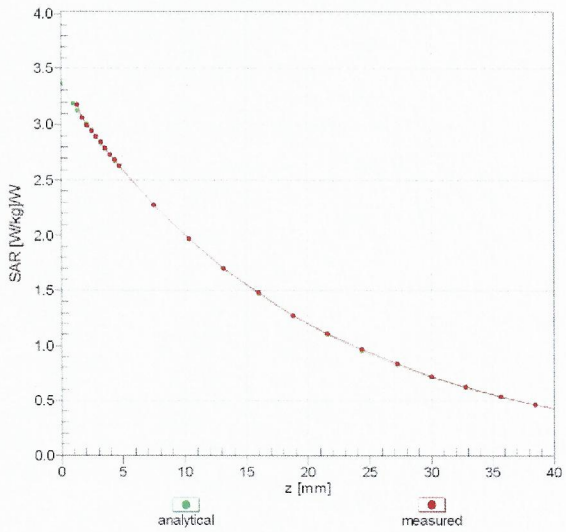


f = 1900 MHz,WGLS R22 (H_convF)

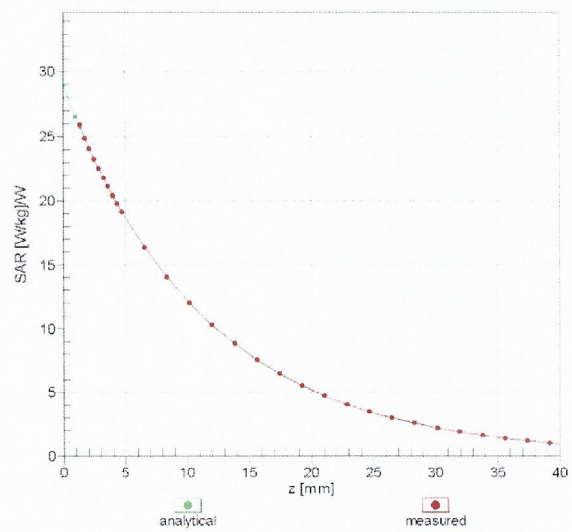


# Deviation from Isotropy in Liquid

**Error (ϕ, ϑ), f = 900 MHz**

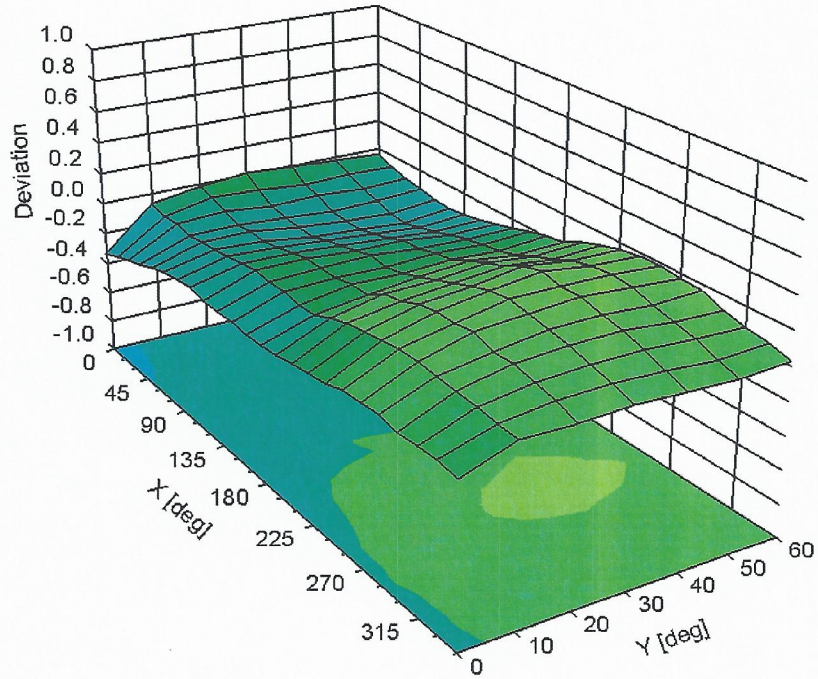





**Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)**

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

## Other Probe Parameters

| | |
|---|---|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 107.3 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

## Appendix: Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB√μV | C | D dB | VR mV | Max Unc[E] (k=2) |
|---|---|---|---|---|---|---|---|---|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 153.2 | ± 3.5 % |
| | | Y | 0.00 | 0.00 | 1.00 | | 144.5 | |
| | | Z | 0.00 | 0.00 | 1.00 | | 151.4 | |
| 10010-CAA | SAR Validation (Square, 100ms, 10ms) | X | 2.46 | 65.57 | 10.33 | 10.00 | 20.0 | ± 9.6 % |
| | | Y | 2.58 | 66.85 | 10.94 | | 20.0 | |
| | | Z | 1.86 | 62.99 | 8.17 | | 20.0 | |
| 10011-CAB | UMTS-FDD (WCDMA) | X | 0.96 | 69.29 | 15.51 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.93 | 66.88 | 14.68 | | 150.0 | |
| | | Z | 0.96 | 69.60 | 15.68 | | 150.0 | |
| 10012-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 1.07 | 64.52 | 15.65 | 0.41 | 150.0 | ± 9.6 % |
| | | Y | 1.12 | 63.74 | 15.00 | | 150.0 | |
| | | Z | 1.05 | 64.42 | 15.37 | | 150.0 | |
| 10013-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 4.64 | 67.04 | 17.28 | 1.46 | 150.0 | ± 9.6 % |
| | | Y | 4.69 | 66.78 | 16.99 | | 150.0 | |
| | | Z | 4.48 | 67.08 | 16.97 | | 150.0 | |
| 10021-DAC | GSM-FDD (TDMA, GMSK) | X | 100.00 | 113.55 | 27.40 | 9.39 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 113.18 | 27.01 | | 50.0 | |
| | | Z | 100.00 | 106.64 | 23.61 | | 50.0 | |
| 10023-DAC | GPRS-FDD (TDMA, GMSK, TN 0) | X | 100.00 | 113.06 | 27.24 | 9.57 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 112.70 | 26.84 | | 50.0 | |
| | | Z | 32.97 | 94.20 | 20.54 | | 50.0 | |
| 10024-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 100.00 | 111.50 | 25.18 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 111.79 | 25.25 | | 60.0 | |
| | | Z | 100.00 | 104.88 | 21.52 | | 60.0 | |
| 10025-DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | X | 3.89 | 66.96 | 23.84 | 12.57 | 50.0 | ± 9.6 % |
| | | Y | 4.25 | 70.19 | 25.75 | | 50.0 | |
| | | Z | 3.28 | 63.68 | 21.63 | | 50.0 | |
| 10026-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | X | 8.05 | 89.16 | 31.60 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 7.77 | 88.25 | 31.17 | | 60.0 | |
| | | Z | 5.87 | 82.94 | 28.96 | | 60.0 | |
| 10027-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 100.00 | 110.68 | 23.90 | 4.80 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 112.16 | 24.62 | | 80.0 | |
| | | Z | 100.00 | 104.54 | 20.49 | | 80.0 | |
| 10028-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 100.00 | 109.55 | 22.62 | 3.55 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 113.50 | 24.48 | | 100.0 | |
| | | Z | 100.00 | 104.05 | 19.54 | | 100.0 | |
| 10029-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2) | X | 5.29 | 80.16 | 27.01 | 7.80 | 80.0 | ± 9.6 % |
| | | Y | 5.14 | 79.09 | 26.35 | | 80.0 | |
| | | Z | 3.96 | 74.93 | 24.59 | | 80.0 | |
| 10030-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | X | 100.00 | 108.68 | 23.35 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 100.00 | 109.67 | 23.80 | | 70.0 | |
| | | Z | 100.00 | 101.79 | 19.60 | | 70.0 | |
| 10031-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | X | 0.42 | 62.17 | 5.93 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 107.91 | 20.81 | | 100.0 | |
| | | Z | 0.20 | 60.00 | 3.98 | | 100.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 0.21 | 60.00 | 3.06 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 108.51 | 20.18 | | 100.0 | |
| | | Z | 17.50 | 60.55 | 1.43 | | 100.0 | |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1) | X | 26.75 | 102.90 | 26.12 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 11.41 | 91.98 | 23.49 | | 70.0 | |
| | | Z | 8.40 | 86.52 | 20.27 | | 70.0 | |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3) | X | 3.04 | 75.65 | 15.32 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 2.84 | 75.48 | 16.17 | | 100.0 | |
| | | Z | 1.44 | 68.36 | 11.69 | | 100.0 | |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5) | X | 1.53 | 69.13 | 12.32 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 1.81 | 71.22 | 14.21 | | 100.0 | |
| | | Z | 0.97 | 65.45 | 10.03 | | 100.0 | |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | X | 68.65 | 116.35 | 29.55 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 17.31 | 98.26 | 25.40 | | 70.0 | |
| | | Z | 14.64 | 93.89 | 22.52 | | 70.0 | |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | X | 2.53 | 73.73 | 14.61 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 2.51 | 74.11 | 15.65 | | 100.0 | |
| | | Z | 1.27 | 67.18 | 11.19 | | 100.0 | |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | X | 1.60 | 69.92 | 12.78 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 1.84 | 71.62 | 14.51 | | 100.0 | |
| | | Z | 0.99 | 65.91 | 10.38 | | 100.0 | |
| 10039-CAB | CDMA2000 (1xRTT, RC1) | X | 0.74 | 63.41 | 8.92 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.23 | 68.14 | 12.51 | | 150.0 | |
| | | Z | 0.60 | 62.45 | 7.98 | | 150.0 | |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 100.00 | 108.18 | 24.00 | 7.78 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 108.88 | 24.22 | | 50.0 | |
| | | Z | 10.97 | 81.94 | 15.63 | | 50.0 | |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM) | X | 0.00 | 65.90 | 22.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.01 | 122.92 | 0.71 | | 150.0 | |
| | | Z | 0.13 | 128.48 | 4.69 | | 150.0 | |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | X | 14.87 | 85.35 | 21.09 | 13.80 | 25.0 | ± 9.6 % |
| | | Y | 23.17 | 91.69 | 22.64 | | 25.0 | |
| | | Z | 6.22 | 71.44 | 14.68 | | 25.0 | |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | X | 24.31 | 94.02 | 22.62 | 10.79 | 40.0 | ± 9.6 % |
| | | Y | 43.77 | 101.49 | 24.30 | | 40.0 | |
| | | Z | 6.49 | 74.97 | 14.88 | | 40.0 | |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | X | 18.56 | 94.19 | 24.49 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 19.55 | 95.88 | 25.17 | | 50.0 | |
| | | Z | 13.54 | 87.88 | 21.18 | | 50.0 | |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | X | 4.17 | 75.85 | 24.49 | 6.55 | 100.0 | ± 9.6 % |
| | | Y | 4.09 | 74.81 | 23.76 | | 100.0 | |
| | | Z | 3.25 | 71.57 | 22.39 | | 100.0 | |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | X | 1.13 | 66.04 | 16.48 | 0.61 | 110.0 | ± 9.6 % |
| | | Y | 1.16 | 64.80 | 15.58 | | 110.0 | |
| | | Z | 1.07 | 65.37 | 15.92 | | 110.0 | |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | X | 100.00 | 137.72 | 34.95 | 1.30 | 110.0 | ± 9.6 % |
| | | Y | 14.15 | 108.54 | 28.54 | | 110.0 | |
| | | Z | 100.00 | 142.16 | 36.45 | | 110.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | X | 5.68 | 93.99 | 26.90 | 2.04 | 110.0 | ± 9.6 % |
| | | Y | 2.72 | 79.85 | 21.80 | | 110.0 | |
| | | Z | 2.32 | 80.40 | 22.21 | | 110.0 | |
| 10062-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | X | 4.40 | 66.89 | 16.61 | 0.49 | 100.0 | ± 9.6 % |
| | | Y | 4.48 | 66.72 | 16.41 | | 100.0 | |
| | | Z | 4.27 | 67.05 | 16.40 | | 100.0 | |
| 10063-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | X | 4.43 | 67.03 | 16.74 | 0.72 | 100.0 | ± 9.6 % |
| | | Y | 4.50 | 66.82 | 16.51 | | 100.0 | |
| | | Z | 4.29 | 67.16 | 16.50 | | 100.0 | |
| 10064-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps) | X | 4.66 | 67.22 | 16.93 | 0.86 | 100.0 | ± 9.6 % |
| | | Y | 4.74 | 67.02 | 16.71 | | 100.0 | |
| | | Z | 4.50 | 67.31 | 16.67 | | 100.0 | |
| 10065-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) | X | 4.55 | 67.11 | 17.04 | 1.21 | 100.0 | ± 9.6 % |
| | | Y | 4.62 | 66.89 | 16.79 | | 100.0 | |
| | | Z | 4.38 | 67.12 | 16.73 | | 100.0 | |
| 10066-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | X | 4.57 | 67.14 | 17.22 | 1.46 | 100.0 | ± 9.6 % |
| | | Y | 4.64 | 66.91 | 16.95 | | 100.0 | |
| | | Z | 4.38 | 67.08 | 16.86 | | 100.0 | |
| 10067-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps) | X | 4.87 | 67.48 | 17.74 | 2.04 | 100.0 | ± 9.6 % |
| | | Y | 4.93 | 67.19 | 17.44 | | 100.0 | |
| | | Z | 4.65 | 67.30 | 17.29 | | 100.0 | |
| 10068-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | X | 4.92 | 67.43 | 17.92 | 2.55 | 100.0 | ± 9.6 % |
| | | Y | 4.97 | 67.13 | 17.61 | | 100.0 | |
| | | Z | 4.70 | 67.27 | 17.49 | | 100.0 | |
| 10069-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) | X | 4.98 | 67.46 | 18.11 | 2.67 | 100.0 | ± 9.6 % |
| | | Y | 5.04 | 67.15 | 17.79 | | 100.0 | |
| | | Z | 4.74 | 67.23 | 17.63 | | 100.0 | |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | X | 4.75 | 67.16 | 17.60 | 1.99 | 100.0 | ± 9.6 % |
| | | Y | 4.79 | 66.87 | 17.29 | | 100.0 | |
| | | Z | 4.57 | 67.14 | 17.25 | | 100.0 | |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 4.72 | 67.47 | 17.83 | 2.30 | 100.0 | ± 9.6 % |
| | | Y | 4.76 | 67.14 | 17.49 | | 100.0 | |
| | | Z | 4.51 | 67.32 | 17.42 | | 100.0 | |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 4.81 | 67.75 | 18.22 | 2.83 | 100.0 | ± 9.6 % |
| | | Y | 4.83 | 67.34 | 17.84 | | 100.0 | |
| | | Z | 4.58 | 67.54 | 17.76 | | 100.0 | |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 4.84 | 67.77 | 18.41 | 3.30 | 100.0 | ± 9.6 % |
| | | Y | 4.84 | 67.30 | 18.00 | | 100.0 | |
| | | Z | 4.61 | 67.56 | 17.94 | | 100.0 | |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 4.88 | 67.82 | 18.68 | 3.82 | 90.0 | ± 9.6 % |
| | | Y | 4.87 | 67.35 | 18.27 | | 90.0 | |
| | | Z | 4.64 | 67.56 | 18.18 | | 90.0 | |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 4.93 | 67.72 | 18.87 | 4.15 | 90.0 | ± 9.6 % |
| | | Y | 4.91 | 67.23 | 18.44 | | 90.0 | |
| | | Z | 4.68 | 67.42 | 18.33 | | 90.0 | |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 4.97 | 67.84 | 18.99 | 4.30 | 90.0 | ± 9.6 % |
| | | Y | 4.95 | 67.34 | 18.55 | | 90.0 | |
| | | Z | 4.72 | 67.54 | 18.46 | | 90.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 0.36 | 60.00 | 6.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.59 | 63.42 | 9.69 | | 150.0 | |
| | | Z | 0.32 | 60.00 | 5.85 | | 150.0 | |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 0.70 | 60.00 | 4.28 | 4.77 | 80.0 | ± 9.6 % |
| | | Y | 0.71 | 60.00 | 4.47 | | 80.0 | |
| | | Z | 0.69 | 60.00 | 2.91 | | 80.0 | |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | X | 100.00 | 111.63 | 25.26 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 111.84 | 25.29 | | 60.0 | |
| | | Z | 100.00 | 104.97 | 21.57 | | 60.0 | |
| 10097-CAB | UMTS-FDD (HSDPA) | X | 1.79 | 69.48 | 15.83 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.75 | 68.01 | 15.37 | | 150.0 | |
| | | Z | 1.85 | 70.58 | 16.07 | | 150.0 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 1.75 | 69.43 | 15.81 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.71 | 67.95 | 15.34 | | 150.0 | |
| | | Z | 1.81 | 70.51 | 16.05 | | 150.0 | |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | X | 8.10 | 89.27 | 31.64 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 7.82 | 88.37 | 31.21 | | 60.0 | |
| | | Z | 5.91 | 83.06 | 29.00 | | 60.0 | |
| 10100-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 2.93 | 70.65 | 16.93 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.91 | 69.88 | 16.50 | | 150.0 | |
| | | Z | 2.88 | 71.00 | 17.02 | | 150.0 | |
| 10101-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 3.00 | 67.51 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.06 | 67.25 | 15.75 | | 150.0 | |
| | | Z | 2.95 | 67.78 | 15.94 | | 150.0 | |
| 10102-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 3.11 | 67.54 | 16.09 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.17 | 67.28 | 15.86 | | 150.0 | |
| | | Z | 3.06 | 67.84 | 16.07 | | 150.0 | |
| 10103-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.12 | 76.61 | 21.08 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.02 | 75.69 | 20.46 | | 65.0 | |
| | | Z | 5.04 | 74.42 | 19.98 | | 65.0 | |
| 10104-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 5.76 | 73.36 | 20.41 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.82 | 73.01 | 20.04 | | 65.0 | |
| | | Z | 4.97 | 71.67 | 19.37 | | 65.0 | |
| 10105-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 5.43 | 72.01 | 20.10 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.60 | 72.12 | 19.94 | | 65.0 | |
| | | Z | 4.63 | 70.08 | 18.95 | | 65.0 | |
| 10108-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 2.52 | 70.18 | 16.82 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.51 | 69.21 | 16.32 | | 150.0 | |
| | | Z | 2.46 | 70.52 | 16.90 | | 150.0 | |
| 10109-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 2.65 | 67.63 | 15.85 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.71 | 67.20 | 15.60 | | 150.0 | |
| | | Z | 2.60 | 68.02 | 15.83 | | 150.0 | |
| 10110-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 2.00 | 69.56 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.00 | 68.38 | 15.78 | | 150.0 | |
| | | Z | 1.95 | 69.96 | 16.28 | | 150.0 | |
| 10111-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 2.44 | 69.32 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.45 | 68.42 | 15.85 | | 150.0 | |
| | | Z | 2.47 | 70.27 | 16.29 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10112-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 2.78 | 67.70 | 15.93 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.84 | 67.29 | 15.69 | | 150.0 | |
| | | Z | 2.74 | 68.15 | 15.94 | | 150.0 | |
| 10113-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 2.59 | 69.51 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.60 | 68.63 | 16.01 | | 150.0 | |
| | | Z | 2.62 | 70.47 | 16.44 | | 150.0 | |
| 10114-CAB | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 4.85 | 67.15 | 16.53 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.92 | 67.07 | 16.34 | | 150.0 | |
| | | Z | 4.74 | 67.31 | 16.39 | | 150.0 | |
| 10115-CAB | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | X | 5.09 | 67.20 | 16.55 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.17 | 67.14 | 16.39 | | 150.0 | |
| | | Z | 4.96 | 67.32 | 16.38 | | 150.0 | |
| 10116-CAB | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 4.93 | 67.32 | 16.54 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.01 | 67.26 | 16.37 | | 150.0 | |
| | | Z | 4.80 | 67.45 | 16.39 | | 150.0 | |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 4.83 | 67.05 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.92 | 67.03 | 16.34 | | 150.0 | |
| | | Z | 4.72 | 67.21 | 16.36 | | 150.0 | |
| 10118-CAB | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | X | 5.18 | 67.45 | 16.68 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.24 | 67.32 | 16.48 | | 150.0 | |
| | | Z | 5.01 | 67.45 | 16.45 | | 150.0 | |
| 10119-CAB | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | X | 4.93 | 67.35 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.00 | 67.26 | 16.38 | | 150.0 | |
| | | Z | 4.81 | 67.49 | 16.41 | | 150.0 | |
| 10140-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 3.12 | 67.54 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.19 | 67.29 | 15.77 | | 150.0 | |
| | | Z | 3.06 | 67.85 | 15.96 | | 150.0 | |
| 10141-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 3.25 | 67.75 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.32 | 67.47 | 15.98 | | 150.0 | |
| | | Z | 3.20 | 68.12 | 16.21 | | 150.0 | |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 1.74 | 69.31 | 15.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.76 | 68.27 | 15.08 | | 150.0 | |
| | | Z | 1.70 | 69.77 | 15.16 | | 150.0 | |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 2.16 | 69.07 | 14.68 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.25 | 68.80 | 15.00 | | 150.0 | |
| | | Z | 2.14 | 69.68 | 14.51 | | 150.0 | |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 1.74 | 65.28 | 12.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.92 | 65.76 | 12.95 | | 150.0 | |
| | | Z | 1.60 | 65.02 | 11.63 | | 150.0 | |
| 10145-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 0.58 | 60.00 | 6.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.77 | 61.39 | 8.08 | | 150.0 | |
| | | Z | 0.51 | 60.00 | 5.48 | | 150.0 | |
| 10146-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 0.86 | 60.00 | 5.96 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.06 | 60.98 | 7.22 | | 150.0 | |
| | | Z | 0.74 | 60.00 | 5.02 | | 150.0 | |
| 10147-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 0.87 | 60.00 | 6.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.11 | 61.42 | 7.56 | | 150.0 | |
| | | Z | 0.75 | 60.00 | 5.07 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10149-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 2.66 | 67.71 | 15.91 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.72 | 67.28 | 15.65 | | 150.0 | |
| | | Z | 2.62 | 68.12 | 15.90 | | 150.0 | |
| 10150-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 2.79 | 67.78 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.84 | 67.35 | 15.74 | | 150.0 | |
| | | Z | 2.75 | 68.24 | 16.00 | | 150.0 | |
| 10151-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.77 | 80.29 | 22.54 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.33 | 78.29 | 21.53 | | 65.0 | |
| | | Z | 5.47 | 77.85 | 21.33 | | 65.0 | |
| 10152-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 5.33 | 73.49 | 19.97 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.34 | 72.96 | 19.59 | | 65.0 | |
| | | Z | 4.49 | 71.58 | 18.77 | | 65.0 | |
| 10153-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 5.80 | 74.93 | 21.00 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.76 | 74.19 | 20.51 | | 65.0 | |
| | | Z | 4.93 | 73.13 | 19.88 | | 65.0 | |
| 10154-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 2.06 | 70.10 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.05 | 68.80 | 16.03 | | 150.0 | |
| | | Z | 2.02 | 70.56 | 16.62 | | 150.0 | |
| 10155-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 2.44 | 69.38 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.45 | 68.46 | 15.88 | | 150.0 | |
| | | Z | 2.48 | 70.36 | 16.35 | | 150.0 | |
| 10156-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 1.50 | 68.47 | 14.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.57 | 67.97 | 14.49 | | 150.0 | |
| | | Z | 1.45 | 68.72 | 13.95 | | 150.0 | |
| 10157-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 1.49 | 64.88 | 11.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.72 | 65.90 | 12.60 | | 150.0 | |
| | | Z | 1.33 | 64.34 | 10.66 | | 150.0 | |
| 10158-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 2.60 | 69.64 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.61 | 68.72 | 16.07 | | 150.0 | |
| | | Z | 2.64 | 70.64 | 16.53 | | 150.0 | |
| 10159-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 1.55 | 65.11 | 11.61 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.80 | 66.26 | 12.82 | | 150.0 | |
| | | Z | 1.39 | 64.54 | 10.79 | | 150.0 | |
| 10160-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 2.57 | 69.60 | 16.63 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.56 | 68.57 | 16.14 | | 150.0 | |
| | | Z | 2.47 | 69.70 | 16.54 | | 150.0 | |
| 10161-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 2.67 | 67.78 | 15.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.73 | 67.32 | 15.62 | | 150.0 | |
| | | Z | 2.63 | 68.26 | 15.83 | | 150.0 | |
| 10162-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 2.79 | 68.04 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.85 | 67.55 | 15.77 | | 150.0 | |
| | | Z | 2.75 | 68.57 | 16.01 | | 150.0 | |
| 10166-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 3.17 | 69.79 | 19.57 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.20 | 68.89 | 18.78 | | 150.0 | |
| | | Z | 2.95 | 69.14 | 18.87 | | 150.0 | |
| 10167-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 3.80 | 72.70 | 19.93 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.79 | 71.51 | 19.09 | | 150.0 | |
| | | Z | 3.55 | 72.23 | 19.31 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10168-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 4.49 | 76.44 | 22.00 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.31 | 74.34 | 20.75 | | 150.0 | |
| | | Z | 4.29 | 76.38 | 21.59 | | 150.0 | |
| 10169-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 2.59 | 68.04 | 18.76 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.62 | 67.42 | 18.09 | | 150.0 | |
| | | Z | 2.53 | 67.98 | 18.27 | | 150.0 | |
| 10170-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 3.49 | 74.23 | 21.37 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.41 | 72.75 | 20.32 | | 150.0 | |
| | | Z | 3.58 | 75.13 | 21.26 | | 150.0 | |
| 10171-AAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 2.78 | 69.29 | 18.02 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.80 | 68.69 | 17.44 | | 150.0 | |
| | | Z | 2.71 | 69.37 | 17.54 | | 150.0 | |
| 10172-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 5.88 | 87.05 | 27.69 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 5.30 | 83.58 | 25.79 | | 65.0 | |
| | | Z | 3.26 | 76.76 | 23.19 | | 65.0 | |
| 10173-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 13.70 | 99.60 | 29.81 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.94 | 90.25 | 26.22 | | 65.0 | |
| | | Z | 7.04 | 88.51 | 25.48 | | 65.0 | |
| 10174-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 8.59 | 90.19 | 26.23 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 7.13 | 85.48 | 24.05 | | 65.0 | |
| | | Z | 3.88 | 78.05 | 21.26 | | 65.0 | |
| 10175-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 2.56 | 67.69 | 18.48 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.59 | 67.13 | 17.84 | | 150.0 | |
| | | Z | 2.49 | 67.60 | 17.97 | | 150.0 | |
| 10176-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 3.50 | 74.26 | 21.39 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.41 | 72.77 | 20.34 | | 150.0 | |
| | | Z | 3.59 | 75.16 | 21.28 | | 150.0 | |
| 10177-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 2.58 | 67.83 | 18.56 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.61 | 67.26 | 17.92 | | 150.0 | |
| | | Z | 2.51 | 67.74 | 18.05 | | 150.0 | |
| 10178-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 3.47 | 74.07 | 21.28 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.39 | 72.61 | 20.24 | | 150.0 | |
| | | Z | 3.55 | 74.95 | 21.17 | | 150.0 | |
| 10179-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 3.09 | 71.56 | 19.53 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.06 | 70.57 | 18.74 | | 150.0 | |
| | | Z | 3.07 | 71.92 | 19.18 | | 150.0 | |
| 10180-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 2.77 | 69.24 | 17.98 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.80 | 68.64 | 17.41 | | 150.0 | |
| | | Z | 2.71 | 69.32 | 17.51 | | 150.0 | |
| 10181-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 2.57 | 67.81 | 18.56 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.61 | 67.24 | 17.92 | | 150.0 | |
| | | Z | 2.50 | 67.72 | 18.05 | | 150.0 | |
| 10182-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 3.47 | 74.04 | 21.27 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.38 | 72.59 | 20.23 | | 150.0 | |
| | | Z | 3.55 | 74.92 | 21.15 | | 150.0 | |
| 10183-AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 2.77 | 69.22 | 17.97 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.79 | 68.62 | 17.39 | | 150.0 | |
| | | Z | 2.70 | 69.30 | 17.49 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 2.58 | 67.85 | 18.58 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.61 | 67.28 | 17.94 | | 150.0 | |
| | | Z | 2.51 | 67.77 | 18.07 | | 150.0 | |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 3.48 | 74.12 | 21.31 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.40 | 72.66 | 20.27 | | 150.0 | |
| | | Z | 3.57 | 75.02 | 21.20 | | 150.0 | |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 2.78 | 69.28 | 18.01 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.80 | 68.68 | 17.43 | | 150.0 | |
| | | Z | 2.72 | 69.36 | 17.53 | | 150.0 | |
| 10187-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 2.59 | 67.95 | 18.68 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.63 | 67.36 | 18.02 | | 150.0 | |
| | | Z | 2.53 | 67.88 | 18.18 | | 150.0 | |
| 10188-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 3.60 | 74.88 | 21.75 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.49 | 73.27 | 20.64 | | 150.0 | |
| | | Z | 3.72 | 75.91 | 21.69 | | 150.0 | |
| 10189-AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 2.84 | 69.72 | 18.31 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.86 | 69.05 | 17.69 | | 150.0 | |
| | | Z | 2.78 | 69.83 | 17.84 | | 150.0 | |
| 10193-CAB | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 4.24 | 66.83 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.33 | 66.71 | 16.05 | | 150.0 | |
| | | Z | 4.17 | 67.21 | 16.12 | | 150.0 | |
| 10194-CAB | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.38 | 67.05 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.48 | 66.96 | 16.18 | | 150.0 | |
| | | Z | 4.29 | 67.37 | 16.25 | | 150.0 | |
| 10195-CAB | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.41 | 67.06 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.51 | 66.98 | 16.20 | | 150.0 | |
| | | Z | 4.31 | 67.35 | 16.24 | | 150.0 | |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 4.22 | 66.81 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.32 | 66.72 | 16.04 | | 150.0 | |
| | | Z | 4.14 | 67.17 | 16.09 | | 150.0 | |
| 10197-CAB | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | X | 4.38 | 67.05 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.48 | 66.96 | 16.19 | | 150.0 | |
| | | Z | 4.29 | 67.37 | 16.25 | | 150.0 | |
| 10198-CAB | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | X | 4.40 | 67.05 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.51 | 66.98 | 16.20 | | 150.0 | |
| | | Z | 4.30 | 67.34 | 16.24 | | 150.0 | |
| 10219-CAB | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 4.18 | 66.86 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.27 | 66.75 | 16.01 | | 150.0 | |
| | | Z | 4.10 | 67.24 | 16.08 | | 150.0 | |
| 10220-CAB | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | X | 4.38 | 67.01 | 16.32 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.48 | 66.92 | 16.17 | | 150.0 | |
| | | Z | 4.28 | 67.32 | 16.23 | | 150.0 | |
| 10221-CAB | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | X | 4.42 | 67.00 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.52 | 66.92 | 16.19 | | 150.0 | |
| | | Z | 4.32 | 67.30 | 16.23 | | 150.0 | |
| 10222-CAB | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 4.81 | 67.05 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.89 | 67.00 | 16.32 | | 150.0 | |
| | | Z | 4.70 | 67.21 | 16.35 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10223-CAB | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | X | 5.06 | 67.21 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.16 | 67.20 | 16.44 | | 150.0 | |
| | | Z | 4.91 | 67.28 | 16.38 | | 150.0 | |
| 10224-CAB | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 4.85 | 67.17 | 16.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.93 | 67.12 | 16.31 | | 150.0 | |
| | | Z | 4.74 | 67.36 | 16.35 | | 150.0 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 2.51 | 66.34 | 14.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.61 | 66.13 | 14.83 | | 150.0 | |
| | | Z | 2.46 | 66.75 | 14.59 | | 150.0 | |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 15.41 | 101.95 | 30.62 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.61 | 91.66 | 26.78 | | 65.0 | |
| | | Z | 7.80 | 90.47 | 26.24 | | 65.0 | |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 15.19 | 100.12 | 29.36 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.40 | 90.05 | 25.60 | | 65.0 | |
| | | Z | 7.35 | 88.27 | 24.80 | | 65.0 | |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 7.70 | 93.10 | 29.94 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 6.07 | 86.55 | 26.97 | | 65.0 | |
| | | Z | 4.20 | 82.08 | 25.39 | | 65.0 | |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 13.82 | 99.74 | 29.86 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.01 | 90.36 | 26.26 | | 65.0 | |
| | | Z | 7.11 | 88.67 | 25.54 | | 65.0 | |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 13.48 | 97.89 | 28.61 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.74 | 88.75 | 25.10 | | 65.0 | |
| | | Z | 6.65 | 86.51 | 24.13 | | 65.0 | |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 7.23 | 91.68 | 29.37 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 5.81 | 85.62 | 26.55 | | 65.0 | |
| | | Z | 4.00 | 81.04 | 24.89 | | 65.0 | |
| 10232-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 13.79 | 99.72 | 29.85 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.99 | 90.35 | 26.26 | | 65.0 | |
| | | Z | 7.09 | 88.64 | 25.54 | | 65.0 | |
| 10233-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 13.43 | 97.83 | 28.60 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.72 | 88.71 | 25.09 | | 65.0 | |
| | | Z | 6.62 | 86.46 | 24.12 | | 65.0 | |
| 10234-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 6.91 | 90.59 | 28.86 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 5.61 | 84.84 | 26.14 | | 65.0 | |
| | | Z | 3.86 | 80.24 | 24.45 | | 65.0 | |
| 10235-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 13.83 | 99.78 | 29.87 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.00 | 90.38 | 26.27 | | 65.0 | |
| | | Z | 7.09 | 88.66 | 25.55 | | 65.0 | |
| 10236-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 13.62 | 98.04 | 28.65 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.81 | 88.86 | 25.13 | | 65.0 | |
| | | Z | 6.70 | 86.60 | 24.16 | | 65.0 | |
| 10237-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 7.24 | 91.74 | 29.39 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 5.81 | 85.65 | 26.56 | | 65.0 | |
| | | Z | 3.99 | 81.03 | 24.90 | | 65.0 | |
| 10238-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 13.76 | 99.70 | 29.84 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.97 | 90.32 | 26.25 | | 65.0 | |
| | | Z | 7.07 | 88.61 | 25.52 | | 65.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10239-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 13.37 | 97.78 | 28.58 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.69 | 88.67 | 25.08 | | 65.0 | |
| | | Z | 6.59 | 86.40 | 24.10 | | 65.0 | |
| 10240-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 7.22 | 91.71 | 29.38 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 5.80 | 85.63 | 26.55 | | 65.0 | |
| | | Z | 3.99 | 81.03 | 24.89 | | 65.0 | |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 7.92 | 83.31 | 26.43 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 7.39 | 80.86 | 25.11 | | 65.0 | |
| | | Z | 6.39 | 80.34 | 24.81 | | 65.0 | |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 7.05 | 80.89 | 25.37 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 6.86 | 79.38 | 24.43 | | 65.0 | |
| | | Z | 5.31 | 76.70 | 23.25 | | 65.0 | |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 5.61 | 76.83 | 24.61 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 5.60 | 75.93 | 23.88 | | 65.0 | |
| | | Z | 4.41 | 73.05 | 22.53 | | 65.0 | |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 4.02 | 70.41 | 14.69 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.13 | 70.49 | 14.93 | | 65.0 | |
| | | Z | 2.49 | 65.11 | 11.00 | | 65.0 | |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 3.85 | 69.59 | 14.25 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.01 | 69.84 | 14.58 | | 65.0 | |
| | | Z | 2.45 | 64.72 | 10.74 | | 65.0 | |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 4.04 | 73.92 | 16.51 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.21 | 74.30 | 17.06 | | 65.0 | |
| | | Z | 2.46 | 68.40 | 13.32 | | 65.0 | |
| 10247-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 4.12 | 71.43 | 16.28 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.26 | 71.62 | 16.65 | | 65.0 | |
| | | Z | 3.07 | 68.30 | 14.10 | | 65.0 | |
| 10248-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 3.99 | 70.52 | 15.86 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.18 | 70.90 | 16.31 | | 65.0 | |
| | | Z | 2.99 | 67.51 | 13.71 | | 65.0 | |
| 10249-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 7.21 | 83.53 | 21.70 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.04 | 80.32 | 20.70 | | 65.0 | |
| | | Z | 4.60 | 77.74 | 18.93 | | 65.0 | |
| 10250-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 5.73 | 77.13 | 21.21 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.49 | 75.70 | 20.56 | | 65.0 | |
| | | Z | 4.71 | 74.90 | 19.83 | | 65.0 | |
| 10251-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 5.08 | 73.68 | 19.28 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.08 | 73.10 | 19.02 | | 65.0 | |
| | | Z | 4.15 | 71.43 | 17.80 | | 65.0 | |
| 10252-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 7.72 | 84.95 | 23.95 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.57 | 81.27 | 22.47 | | 65.0 | |
| | | Z | 5.73 | 81.18 | 22.23 | | 65.0 | |
| 10253-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 5.25 | 73.10 | 19.66 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.27 | 72.57 | 19.33 | | 65.0 | |
| | | Z | 4.44 | 71.27 | 18.45 | | 65.0 | |
| 10254-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 5.65 | 74.31 | 20.52 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.63 | 73.63 | 20.11 | | 65.0 | |
| | | Z | 4.81 | 72.54 | 19.36 | | 65.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10255-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.41 | 79.52 | 22.36 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.03 | 77.61 | 21.41 | | 65.0 | |
| | | Z | 5.18 | 77.05 | 21.09 | | 65.0 | |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 2.62 | 64.77 | 10.66 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 2.89 | 65.71 | 11.45 | | 65.0 | |
| | | Z | 1.74 | 61.55 | 7.76 | | 65.0 | |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 2.56 | 64.22 | 10.26 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 2.83 | 65.16 | 11.06 | | 65.0 | |
| | | Z | 1.73 | 61.29 | 7.50 | | 65.0 | |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 2.33 | 65.98 | 11.67 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 2.74 | 67.85 | 13.09 | | 65.0 | |
| | | Z | 1.55 | 62.66 | 9.04 | | 65.0 | |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 4.78 | 73.82 | 18.19 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.76 | 73.30 | 18.14 | | 65.0 | |
| | | Z | 3.71 | 70.96 | 16.29 | | 65.0 | |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 4.75 | 73.36 | 17.98 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.77 | 72.96 | 17.98 | | 65.0 | |
| | | Z | 3.71 | 70.59 | 16.10 | | 65.0 | |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 7.00 | 83.14 | 22.24 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.96 | 79.88 | 21.10 | | 65.0 | |
| | | Z | 4.89 | 78.58 | 20.00 | | 65.0 | |
| 10262-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 5.70 | 77.00 | 21.13 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.47 | 75.60 | 20.50 | | 65.0 | |
| | | Z | 4.68 | 74.76 | 19.75 | | 65.0 | |
| 10263-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 5.08 | 73.66 | 19.27 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.07 | 73.07 | 19.02 | | 65.0 | |
| | | Z | 4.15 | 71.42 | 17.80 | | 65.0 | |
| 10264-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 7.58 | 84.58 | 23.79 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.49 | 81.02 | 22.35 | | 65.0 | |
| | | Z | 5.63 | 80.83 | 22.06 | | 65.0 | |
| 10265-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 5.33 | 73.50 | 19.98 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.34 | 72.96 | 19.60 | | 65.0 | |
| | | Z | 4.49 | 71.58 | 18.78 | | 65.0 | |
| 10266-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 5.80 | 74.91 | 20.98 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.76 | 74.17 | 20.50 | | 65.0 | |
| | | Z | 4.93 | 73.11 | 19.87 | | 65.0 | |
| 10267-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.75 | 80.22 | 22.51 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.31 | 78.24 | 21.51 | | 65.0 | |
| | | Z | 5.45 | 77.78 | 21.30 | | 65.0 | |
| 10268-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 5.93 | 73.37 | 20.49 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.99 | 73.01 | 20.12 | | 65.0 | |
| | | Z | 5.16 | 71.83 | 19.50 | | 65.0 | |
| 10269-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 5.93 | 72.96 | 20.33 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.99 | 72.64 | 20.00 | | 65.0 | |
| | | Z | 5.19 | 71.51 | 19.38 | | 65.0 | |
| 10270-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.27 | 76.42 | 21.20 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.15 | 75.42 | 20.55 | | 65.0 | |
| | | Z | 5.37 | 74.84 | 20.32 | | 65.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 2.38 | 67.09 | 14.90 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.44 | 66.67 | 14.85 | | 150.0 | |
| | | Z | 2.34 | 67.57 | 14.77 | | 150.0 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 1.49 | 69.19 | 15.59 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.48 | 67.68 | 15.09 | | 150.0 | |
| | | Z | 1.49 | 69.77 | 15.72 | | 150.0 | |
| 10277-CAA | PHS (QPSK) | X | 2.09 | 60.92 | 6.52 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 1.99 | 60.88 | 6.43 | | 50.0 | |
| | | Z | 1.56 | 59.12 | 4.50 | | 50.0 | |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5) | X | 3.33 | 66.21 | 11.58 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 3.45 | 67.40 | 12.36 | | 50.0 | |
| | | Z | 2.52 | 63.38 | 9.00 | | 50.0 | |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38) | X | 3.39 | 66.39 | 11.72 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 3.53 | 67.62 | 12.52 | | 50.0 | |
| | | Z | 2.56 | 63.50 | 9.12 | | 50.0 | |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate | X | 0.61 | 61.53 | 7.60 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.95 | 65.07 | 10.75 | | 150.0 | |
| | | Z | 0.49 | 60.68 | 6.68 | | 150.0 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 0.35 | 60.00 | 6.15 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.58 | 63.25 | 9.58 | | 150.0 | |
| | | Z | 0.32 | 60.00 | 5.83 | | 150.0 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 0.39 | 61.31 | 7.18 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.79 | 67.34 | 11.99 | | 150.0 | |
| | | Z | 0.36 | 61.33 | 6.91 | | 150.0 | |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate | X | 0.70 | 66.46 | 10.24 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.84 | 77.49 | 16.58 | | 150.0 | |
| | | Z | 0.96 | 69.80 | 11.25 | | 150.0 | |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | X | 24.25 | 96.58 | 25.60 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 13.21 | 88.89 | 23.79 | | 50.0 | |
| | | Z | 17.74 | 90.30 | 22.44 | | 50.0 | |
| 10297-AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 2.54 | 70.33 | 16.91 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.52 | 69.32 | 16.40 | | 150.0 | |
| | | Z | 2.48 | 70.69 | 17.00 | | 150.0 | |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 0.87 | 62.84 | 9.39 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.14 | 64.99 | 11.49 | | 150.0 | |
| | | Z | 0.74 | 62.03 | 8.44 | | 150.0 | |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 1.31 | 62.98 | 9.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.60 | 64.50 | 10.42 | | 150.0 | |
| | | Z | 0.95 | 60.67 | 6.76 | | 150.0 | |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 1.06 | 60.58 | 7.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.28 | 61.71 | 8.21 | | 150.0 | |
| | | Z | 0.80 | 59.16 | 5.20 | | 150.0 | |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | X | 4.72 | 67.05 | 17.86 | 4.17 | 50.0 | ± 9.6 % |
| | | Y | 4.49 | 65.52 | 17.15 | | 50.0 | |
| | | Z | 4.22 | 65.84 | 16.97 | | 50.0 | |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 5.04 | 66.76 | 18.08 | 4.96 | 50.0 | ± 9.6 % |
| | | Y | 5.00 | 66.22 | 17.91 | | 50.0 | |
| | | Z | 4.64 | 66.13 | 17.51 | | 50.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | X | 4.99 | 67.71 | 18.65 | 4.96 | 50.0 | ± 9.6 % |
| | | Y | 4.76 | 65.90 | 17.73 | | 50.0 | |
| | | Z | 4.52 | 66.56 | 17.75 | | 50.0 | |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | X | 4.61 | 66.36 | 17.42 | 4.17 | 50.0 | ± 9.6 % |
| | | Y | 4.57 | 65.80 | 17.25 | | 50.0 | |
| | | Z | 4.26 | 65.88 | 16.92 | | 50.0 | |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols) | X | 5.19 | 72.10 | 20.50 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.47 | 68.84 | 19.43 | | 35.0 | |
| | | Z | 4.13 | 68.52 | 18.41 | | 35.0 | |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols) | X | 5.03 | 69.52 | 19.81 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.66 | 67.41 | 19.03 | | 35.0 | |
| | | Z | 4.34 | 67.36 | 18.35 | | 35.0 | |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols) | X | 4.97 | 69.79 | 19.79 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.56 | 67.54 | 18.97 | | 35.0 | |
| | | Z | 4.24 | 67.41 | 18.25 | | 35.0 | |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | X | 5.00 | 70.20 | 20.02 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.56 | 67.81 | 19.14 | | 35.0 | |
| | | Z | 4.23 | 67.67 | 18.42 | | 35.0 | |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 5.04 | 69.58 | 19.90 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.68 | 67.50 | 19.12 | | 35.0 | |
| | | Z | 4.34 | 67.37 | 18.43 | | 35.0 | |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols) | X | 5.02 | 69.73 | 19.86 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.62 | 67.52 | 19.04 | | 35.0 | |
| | | Z | 4.31 | 67.48 | 18.38 | | 35.0 | |
| 10311-AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 2.89 | 69.32 | 16.51 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.88 | 68.58 | 16.07 | | 150.0 | |
| | | Z | 2.84 | 69.69 | 16.60 | | 150.0 | |
| 10313-AAA | iDEN 1:3 | X | 3.64 | 73.80 | 16.25 | 6.99 | 70.0 | ± 9.6 % |
| | | Y | 3.53 | 73.47 | 16.27 | | 70.0 | |
| | | Z | 2.54 | 70.98 | 14.85 | | 70.0 | |
| 10314-AAA | iDEN 1:6 | X | 11.36 | 92.32 | 25.29 | 10.00 | 30.0 | ± 9.6 % |
| | | Y | 6.23 | 84.01 | 23.01 | | 30.0 | |
| | | Z | 14.41 | 96.78 | 26.22 | | 30.0 | |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 0.98 | 64.50 | 15.61 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 1.03 | 63.67 | 14.93 | | 150.0 | |
| | | Z | 0.98 | 64.65 | 15.49 | | 150.0 | |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 4.29 | 66.82 | 16.34 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.37 | 66.68 | 16.16 | | 150.0 | |
| | | Z | 4.17 | 67.03 | 16.16 | | 150.0 | |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | X | 4.29 | 66.82 | 16.34 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.37 | 66.68 | 16.16 | | 150.0 | |
| | | Z | 4.17 | 67.03 | 16.16 | | 150.0 | |
| 10400-AAC | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | X | 4.33 | 67.02 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.44 | 66.95 | 16.15 | | 150.0 | |
| | | Z | 4.21 | 67.24 | 16.15 | | 150.0 | |
| 10401-AAC | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle) | X | 4.99 | 66.73 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.10 | 66.79 | 16.18 | | 150.0 | |
| | | Z | 4.87 | 66.89 | 16.13 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10402-AAC | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle) | X | 5.36 | 67.33 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.44 | 67.34 | 16.35 | | 150.0 | |
| | | Z | 5.26 | 67.52 | 16.37 | | 150.0 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 0.61 | 61.53 | 7.60 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 0.95 | 65.07 | 10.75 | | 115.0 | |
| | | Z | 0.49 | 60.68 | 6.68 | | 115.0 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 0.61 | 61.53 | 7.60 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 0.95 | 65.07 | 10.75 | | 115.0 | |
| | | Z | 0.49 | 60.68 | 6.68 | | 115.0 | |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate | X | 100.00 | 120.88 | 29.11 | 0.00 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 119.48 | 28.73 | | 100.0 | |
| | | Z | 100.00 | 111.63 | 24.58 | | 100.0 | |
| 10410-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 127.51 | 32.08 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 31.82 | 108.36 | 26.95 | | 80.0 | |
| | | Z | 62.35 | 116.51 | 27.82 | | 80.0 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 0.90 | 63.50 | 14.92 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.97 | 62.93 | 14.41 | | 150.0 | |
| | | Z | 0.93 | 63.99 | 15.00 | | 150.0 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 4.23 | 66.80 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.33 | 66.70 | 16.12 | | 150.0 | |
| | | Z | 4.15 | 67.12 | 16.17 | | 150.0 | |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle) | X | 4.23 | 66.80 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.33 | 66.70 | 16.12 | | 150.0 | |
| | | Z | 4.15 | 67.12 | 16.17 | | 150.0 | |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preambule) | X | 4.23 | 67.03 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.32 | 66.91 | 16.17 | | 150.0 | |
| | | Z | 4.14 | 67.37 | 16.26 | | 150.0 | |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preambule) | X | 4.24 | 66.95 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.34 | 66.84 | 16.16 | | 150.0 | |
| | | Z | 4.16 | 67.28 | 16.23 | | 150.0 | |
| 10422-AAA | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | X | 4.35 | 66.91 | 16.32 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.45 | 66.82 | 16.17 | | 150.0 | |
| | | Z | 4.26 | 67.23 | 16.23 | | 150.0 | |
| 10423-AAA | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | X | 4.47 | 67.16 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.57 | 67.08 | 16.26 | | 150.0 | |
| | | Z | 4.36 | 67.46 | 16.30 | | 150.0 | |
| 10424-AAA | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | X | 4.40 | 67.11 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.50 | 67.03 | 16.24 | | 150.0 | |
| | | Z | 4.30 | 67.40 | 16.28 | | 150.0 | |
| 10425-AAA | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | X | 5.04 | 67.26 | 16.58 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.13 | 67.22 | 16.42 | | 150.0 | |
| | | Z | 4.89 | 67.32 | 16.38 | | 150.0 | |
| 10426-AAA | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | X | 5.08 | 67.43 | 16.66 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.14 | 67.30 | 16.46 | | 150.0 | |
| | | Z | 4.92 | 67.46 | 16.45 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10427-AAA | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | X | 5.02 | 67.13 | 16.51 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.11 | 67.10 | 16.36 | | 150.0 | |
| | | Z | 4.90 | 67.29 | 16.36 | | 150.0 | |
| 10430-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | X | 4.47 | 74.13 | 19.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.27 | 72.47 | 18.45 | | 150.0 | |
| | | Z | 5.08 | 77.10 | 19.89 | | 150.0 | |
| 10431-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | X | 3.84 | 67.47 | 16.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.94 | 67.28 | 15.99 | | 150.0 | |
| | | Z | 3.74 | 67.83 | 15.98 | | 150.0 | |
| 10432-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | X | 4.16 | 67.25 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.27 | 67.12 | 16.16 | | 150.0 | |
| | | Z | 4.06 | 67.58 | 16.20 | | 150.0 | |
| 10433-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | X | 4.42 | 67.15 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.52 | 67.06 | 16.26 | | 150.0 | |
| | | Z | 4.32 | 67.45 | 16.31 | | 150.0 | |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH) | X | 4.64 | 75.00 | 18.70 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.40 | 73.39 | 18.26 | | 150.0 | |
| | | Z | 5.41 | 78.17 | 19.50 | | 150.0 | |
| 10435-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 127.19 | 31.93 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 27.78 | 106.36 | 26.40 | | 80.0 | |
| | | Z | 42.85 | 111.62 | 26.64 | | 80.0 | |
| 10447-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.04 | 67.08 | 14.65 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.18 | 67.05 | 14.85 | | 150.0 | |
| | | Z | 2.91 | 67.25 | 14.30 | | 150.0 | |
| 10448-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%) | X | 3.71 | 67.27 | 15.98 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.81 | 67.07 | 15.86 | | 150.0 | |
| | | Z | 3.62 | 67.65 | 15.87 | | 150.0 | |
| 10449-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%) | X | 4.01 | 67.09 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.11 | 66.95 | 16.06 | | 150.0 | |
| | | Z | 3.92 | 67.43 | 16.12 | | 150.0 | |
| 10450-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.22 | 66.93 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.32 | 66.84 | 16.11 | | 150.0 | |
| | | Z | 4.14 | 67.24 | 16.18 | | 150.0 | |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | X | 2.79 | 66.50 | 13.63 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.98 | 66.79 | 14.09 | | 150.0 | |
| | | Z | 2.59 | 66.31 | 13.04 | | 150.0 | |
| 10456-AAA | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle) | X | 6.00 | 67.78 | 16.73 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.04 | 67.74 | 16.57 | | 150.0 | |
| | | Z | 6.02 | 68.38 | 16.82 | | 150.0 | |
| 10457-AAA | UMTS-FDD (DC-HSDPA) | X | 3.60 | 65.57 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.68 | 65.45 | 15.84 | | 150.0 | |
| | | Z | 3.57 | 66.00 | 15.95 | | 150.0 | |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | X | 2.28 | 64.00 | 11.72 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.41 | 64.11 | 12.28 | | 150.0 | |
| | | Z | 1.90 | 62.62 | 10.39 | | 150.0 | |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | X | 4.90 | 70.07 | 18.22 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.93 | 69.48 | 18.09 | | 150.0 | |
| | | Z | 5.05 | 71.41 | 18.27 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10460-AAA | UMTS-FDD (WCDMA, AMR) | X | 0.94 | 72.42 | 17.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.82 | 67.88 | 15.60 | | 150.0 | |
| | | Z | 0.96 | 72.94 | 17.69 | | 150.0 | |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 133.76 | 34.95 | 3.29 | 80.0 | ± 9.6 % |
| | | Y | 22.54 | 106.56 | 27.45 | | 80.0 | |
| | | Z | 100.00 | 126.80 | 31.21 | | 80.0 | |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.53 | 66.28 | 11.09 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.98 | 61.72 | 9.01 | | 80.0 | |
| | | Z | 0.66 | 60.00 | 6.84 | | 80.0 | |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.79 | 60.00 | 7.60 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.83 | 60.00 | 7.56 | | 80.0 | |
| | | Z | 0.36 | 55.81 | 3.91 | | 80.0 | |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 130.06 | 33.08 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 13.20 | 97.62 | 24.36 | | 80.0 | |
| | | Z | 92.51 | 120.86 | 28.60 | | 80.0 | |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.21 | 64.05 | 10.09 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.92 | 61.09 | 8.63 | | 80.0 | |
| | | Z | 0.66 | 60.00 | 6.77 | | 80.0 | |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.79 | 60.00 | 7.55 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.83 | 60.00 | 7.52 | | 80.0 | |
| | | Z | 0.35 | 55.73 | 3.83 | | 80.0 | |
| 10467-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 130.58 | 33.30 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 16.52 | 100.70 | 25.21 | | 80.0 | |
| | | Z | 100.00 | 122.35 | 29.03 | | 80.0 | |
| 10468-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.29 | 64.72 | 10.40 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.94 | 61.28 | 8.75 | | 80.0 | |
| | | Z | 0.66 | 60.00 | 6.80 | | 80.0 | |
| 10469-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.79 | 60.00 | 7.55 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.83 | 60.00 | 7.52 | | 80.0 | |
| | | Z | 0.35 | 55.73 | 3.83 | | 80.0 | |
| 10470-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 130.62 | 33.31 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 16.78 | 100.92 | 25.26 | | 80.0 | |
| | | Z | 100.00 | 122.35 | 29.02 | | 80.0 | |
| 10471-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.27 | 64.59 | 10.33 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.93 | 61.24 | 8.72 | | 80.0 | |
| | | Z | 0.66 | 60.00 | 6.79 | | 80.0 | |
| 10472-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.79 | 60.00 | 7.53 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.83 | 60.00 | 7.50 | | 80.0 | |
| | | Z | 0.35 | 55.70 | 3.80 | | 80.0 | |
| 10473-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 130.57 | 33.29 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 16.58 | 100.74 | 25.21 | | 80.0 | |
| | | Z | 100.00 | 122.30 | 29.00 | | 80.0 | |
| 10474-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.26 | 64.53 | 10.31 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.93 | 61.22 | 8.71 | | 80.0 | |
| | | Z | 0.66 | 60.00 | 6.78 | | 80.0 | |
| 10475-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.79 | 60.00 | 7.54 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.83 | 60.00 | 7.50 | | 80.0 | |
| | | Z | 0.35 | 55.70 | 3.80 | | 80.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.20 | 64.02 | 10.06 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.91 | 61.06 | 8.60 | | 80.0 | |
| | | Z | 0.66 | 60.00 | 6.75 | | 80.0 | |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.79 | 60.00 | 7.52 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.83 | 60.00 | 7.49 | | 80.0 | |
| | | Z | 0.35 | 55.68 | 3.77 | | 80.0 | |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 126.79 | 33.21 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 10.38 | 91.55 | 23.92 | | 80.0 | |
| | | Z | 100.00 | 123.17 | 30.88 | | 80.0 | |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 111.12 | 25.93 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 4.86 | 75.90 | 16.60 | | 80.0 | |
| | | Z | 2.50 | 69.40 | 12.93 | | 80.0 | |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 17.33 | 89.29 | 19.94 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 3.20 | 70.44 | 14.16 | | 80.0 | |
| | | Z | 1.42 | 63.47 | 9.98 | | 80.0 | |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.01 | 67.85 | 13.24 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.00 | 67.46 | 13.68 | | 80.0 | |
| | | Z | 1.08 | 62.21 | 9.90 | | 80.0 | |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.20 | 65.59 | 11.72 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.17 | 65.07 | 11.85 | | 80.0 | |
| | | Z | 1.15 | 60.00 | 7.79 | | 80.0 | |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.02 | 64.43 | 11.18 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.09 | 64.36 | 11.51 | | 80.0 | |
| | | Z | 1.17 | 60.00 | 7.77 | | 80.0 | |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.53 | 79.22 | 19.45 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.84 | 72.10 | 17.06 | | 80.0 | |
| | | Z | 2.60 | 72.67 | 16.45 | | 80.0 | |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.56 | 67.74 | 14.01 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.53 | 67.08 | 14.11 | | 80.0 | |
| | | Z | 1.74 | 64.04 | 11.62 | | 80.0 | |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.49 | 67.00 | 13.65 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.51 | 66.63 | 13.88 | | 80.0 | |
| | | Z | 1.72 | 63.54 | 11.33 | | 80.0 | |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.03 | 76.67 | 20.22 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.18 | 71.86 | 18.18 | | 80.0 | |
| | | Z | 2.98 | 73.13 | 18.53 | | 80.0 | |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.48 | 70.97 | 17.69 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.17 | 68.69 | 16.67 | | 80.0 | |
| | | Z | 2.92 | 69.30 | 16.55 | | 80.0 | |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.52 | 70.58 | 17.52 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.25 | 68.52 | 16.59 | | 80.0 | |
| | | Z | 2.96 | 68.98 | 16.39 | | 80.0 | |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.82 | 73.14 | 19.18 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.42 | 70.39 | 17.81 | | 80.0 | |
| | | Z | 3.09 | 70.86 | 17.98 | | 80.0 | |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.66 | 69.39 | 17.61 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.51 | 67.96 | 16.83 | | 80.0 | |
| | | Z | 3.20 | 68.22 | 16.75 | | 80.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.70 | 69.16 | 17.50 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.57 | 67.83 | 16.77 | | 80.0 | |
| | | Z | 3.24 | 68.04 | 16.65 | | 80.0 | |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.24 | 74.94 | 19.81 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.67 | 71.70 | 18.26 | | 80.0 | |
| | | Z | 3.36 | 72.30 | 18.54 | | 80.0 | |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.69 | 69.69 | 17.88 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.54 | 68.22 | 17.04 | | 80.0 | |
| | | Z | 3.22 | 68.45 | 17.03 | | 80.0 | |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.75 | 69.34 | 17.76 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.62 | 68.01 | 16.98 | | 80.0 | |
| | | Z | 3.30 | 68.22 | 16.94 | | 80.0 | |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 0.96 | 60.00 | 7.89 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.15 | 61.18 | 9.30 | | 80.0 | |
| | | Z | 0.83 | 60.00 | 6.90 | | 80.0 | |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.15 | 60.00 | 6.67 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.20 | 60.00 | 7.47 | | 80.0 | |
| | | Z | 1.06 | 60.00 | 5.55 | | 80.0 | |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.17 | 60.00 | 6.51 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.22 | 60.00 | 7.31 | | 80.0 | |
| | | Z | 1.10 | 60.00 | 5.36 | | 80.0 | |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.27 | 78.15 | 19.77 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.97 | 71.96 | 17.50 | | 80.0 | |
| | | Z | 2.82 | 73.28 | 17.46 | | 80.0 | |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.13 | 69.97 | 15.82 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.87 | 68.14 | 15.28 | | 80.0 | |
| | | Z | 2.33 | 67.02 | 13.92 | | 80.0 | |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.10 | 69.46 | 15.52 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.89 | 67.91 | 15.09 | | 80.0 | |
| | | Z | 2.32 | 66.58 | 13.62 | | 80.0 | |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.94 | 76.31 | 20.06 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.14 | 71.64 | 18.07 | | 80.0 | |
| | | Z | 2.92 | 72.80 | 18.38 | | 80.0 | |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.45 | 70.79 | 17.60 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.15 | 68.57 | 16.60 | | 80.0 | |
| | | Z | 2.89 | 69.12 | 16.44 | | 80.0 | |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.49 | 70.43 | 17.43 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.23 | 68.41 | 16.53 | | 80.0 | |
| | | Z | 2.93 | 68.82 | 16.30 | | 80.0 | |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.19 | 74.72 | 19.70 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.64 | 71.54 | 18.18 | | 80.0 | |
| | | Z | 3.32 | 72.09 | 18.43 | | 80.0 | |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.67 | 69.60 | 17.83 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.52 | 68.16 | 17.00 | | 80.0 | |
| | | Z | 3.21 | 68.36 | 16.97 | | 80.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.73 | 69.24 | 17.70 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.60 | 67.93 | 16.93 | | 80.0 | |
| | | Z | 3.28 | 68.12 | 16.88 | | 80.0 | |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.33 | 72.38 | 18.83 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.02 | 70.46 | 17.77 | | 80.0 | |
| | | Z | 3.67 | 70.70 | 17.93 | | 80.0 | |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.06 | 68.76 | 17.68 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.99 | 67.84 | 17.05 | | 80.0 | |
| | | Z | 3.63 | 67.77 | 16.97 | | 80.0 | |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.12 | 68.51 | 17.60 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.06 | 67.66 | 17.00 | | 80.0 | |
| | | Z | 3.70 | 67.61 | 16.92 | | 80.0 | |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.60 | 74.13 | 19.39 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.14 | 71.72 | 18.16 | | 80.0 | |
| | | Z | 3.79 | 72.01 | 18.34 | | 80.0 | |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.97 | 68.97 | 17.79 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.88 | 67.99 | 17.12 | | 80.0 | |
| | | Z | 3.53 | 67.87 | 17.05 | | 80.0 | |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.99 | 68.53 | 17.64 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.92 | 67.65 | 17.02 | | 80.0 | |
| | | Z | 3.57 | 67.54 | 16.93 | | 80.0 | |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | X | 0.86 | 63.76 | 15.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.93 | 63.09 | 14.45 | | 150.0 | |
| | | Z | 0.89 | 64.24 | 15.10 | | 150.0 | |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | X | 1.36 | 87.46 | 22.75 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.54 | 69.72 | 16.60 | | 150.0 | |
| | | Z | 0.87 | 81.18 | 21.47 | | 150.0 | |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | X | 0.73 | 66.61 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.76 | 64.78 | 14.94 | | 150.0 | |
| | | Z | 0.75 | 66.85 | 16.09 | | 150.0 | |
| 10518-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | X | 4.22 | 66.92 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.32 | 66.81 | 16.11 | | 150.0 | |
| | | Z | 4.14 | 67.26 | 16.18 | | 150.0 | |
| 10519-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | X | 4.36 | 67.07 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.47 | 66.97 | 16.20 | | 150.0 | |
| | | Z | 4.26 | 67.39 | 16.25 | | 150.0 | |
| 10520-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | X | 4.22 | 67.01 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.32 | 66.91 | 16.11 | | 150.0 | |
| | | Z | 4.13 | 67.32 | 16.17 | | 150.0 | |
| 10521-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | X | 4.15 | 66.96 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.26 | 66.88 | 16.09 | | 150.0 | |
| | | Z | 4.06 | 67.26 | 16.14 | | 150.0 | |
| 10522-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | X | 4.20 | 67.07 | 16.32 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.31 | 66.99 | 16.18 | | 150.0 | |
| | | Z | 4.08 | 67.30 | 16.18 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10523-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.14 | 67.14 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.23 | 67.00 | 16.11 | | 150.0 | |
| | | Z | 4.06 | 67.51 | 16.23 | | 150.0 | |
| 10524-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.15 | 67.07 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.26 | 66.95 | 16.18 | | 150.0 | |
| | | Z | 4.06 | 67.37 | 16.24 | | 150.0 | |
| 10525-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | X | 4.20 | 66.19 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.29 | 66.07 | 15.81 | | 150.0 | |
| | | Z | 4.13 | 66.56 | 15.92 | | 150.0 | |
| 10526-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | X | 4.31 | 66.45 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.41 | 66.35 | 15.92 | | 150.0 | |
| | | Z | 4.22 | 66.77 | 16.00 | | 150.0 | |
| 10527-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | X | 4.25 | 66.43 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.34 | 66.31 | 15.86 | | 150.0 | |
| | | Z | 4.16 | 66.77 | 15.96 | | 150.0 | |
| 10528-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | X | 4.26 | 66.44 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.36 | 66.33 | 15.89 | | 150.0 | |
| | | Z | 4.17 | 66.77 | 15.98 | | 150.0 | |
| 10529-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | X | 4.26 | 66.44 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.36 | 66.33 | 15.89 | | 150.0 | |
| | | Z | 4.17 | 66.77 | 15.98 | | 150.0 | |
| 10531-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle) | X | 4.22 | 66.45 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.32 | 66.35 | 15.87 | | 150.0 | |
| | | Z | 4.12 | 66.75 | 15.94 | | 150.0 | |
| 10532-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | X | 4.11 | 66.31 | 15.96 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.21 | 66.22 | 15.80 | | 150.0 | |
| | | Z | 4.02 | 66.64 | 15.89 | | 150.0 | |
| 10533-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | X | 4.27 | 66.54 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.36 | 66.41 | 15.90 | | 150.0 | |
| | | Z | 4.17 | 66.88 | 15.99 | | 150.0 | |
| 10534-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle) | X | 4.83 | 66.36 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.92 | 66.33 | 15.96 | | 150.0 | |
| | | Z | 4.73 | 66.59 | 16.01 | | 150.0 | |
| 10535-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | X | 4.87 | 66.48 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.96 | 66.46 | 16.02 | | 150.0 | |
| | | Z | 4.75 | 66.66 | 16.05 | | 150.0 | |
| 10536-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | X | 4.76 | 66.48 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.85 | 66.46 | 16.00 | | 150.0 | |
| | | Z | 4.66 | 66.70 | 16.05 | | 150.0 | |
| 10537-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | X | 4.84 | 66.54 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.91 | 66.45 | 16.00 | | 150.0 | |
| | | Z | 4.73 | 66.74 | 16.07 | | 150.0 | |
| 10538-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | X | 4.89 | 66.44 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.98 | 66.41 | 16.02 | | 150.0 | |
| | | Z | 4.77 | 66.62 | 16.04 | | 150.0 | |
| 10540-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | X | 4.82 | 66.39 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.91 | 66.37 | 16.02 | | 150.0 | |
| | | Z | 4.71 | 66.59 | 16.05 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10541-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle) | X | 4.81 | 66.32 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.89 | 66.29 | 15.96 | | 150.0 | |
| | | Z | 4.71 | 66.57 | 16.02 | | 150.0 | |
| 10542-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | X | 4.96 | 66.42 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.05 | 66.39 | 16.03 | | 150.0 | |
| | | Z | 4.85 | 66.63 | 16.06 | | 150.0 | |
| 10543-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | X | 5.05 | 66.57 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.12 | 66.46 | 16.09 | | 150.0 | |
| | | Z | 4.92 | 66.71 | 16.13 | | 150.0 | |
| 10544-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | X | 5.19 | 66.38 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.26 | 66.41 | 15.96 | | 150.0 | |
| | | Z | 5.09 | 66.58 | 15.97 | | 150.0 | |
| 10545-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | X | 5.38 | 66.91 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.43 | 66.83 | 16.13 | | 150.0 | |
| | | Z | 5.23 | 66.94 | 16.11 | | 150.0 | |
| 10546-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | X | 5.22 | 66.50 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.29 | 66.53 | 15.99 | | 150.0 | |
| | | Z | 5.11 | 66.68 | 15.99 | | 150.0 | |
| 10547-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | X | 5.33 | 66.73 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.37 | 66.64 | 16.03 | | 150.0 | |
| | | Z | 5.21 | 66.86 | 16.08 | | 150.0 | |
| 10548-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | X | 5.45 | 67.31 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.51 | 67.24 | 16.31 | | 150.0 | |
| | | Z | 5.25 | 67.19 | 16.22 | | 150.0 | |
| 10550-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | X | 5.32 | 66.85 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.35 | 66.71 | 16.09 | | 150.0 | |
| | | Z | 5.18 | 66.94 | 16.14 | | 150.0 | |
| 10551-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | X | 5.20 | 66.44 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.29 | 66.50 | 15.95 | | 150.0 | |
| | | Z | 5.09 | 66.62 | 15.94 | | 150.0 | |
| 10552-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | X | 5.19 | 66.51 | 16.09 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.27 | 66.53 | 15.96 | | 150.0 | |
| | | Z | 5.10 | 66.75 | 16.00 | | 150.0 | |
| 10553-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | X | 5.24 | 66.43 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.33 | 66.48 | 15.97 | | 150.0 | |
| | | Z | 5.14 | 66.64 | 15.98 | | 150.0 | |
| 10554-AAB | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.62 | 66.70 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.68 | 66.74 | 16.03 | | 150.0 | |
| | | Z | 5.52 | 66.86 | 16.02 | | 150.0 | |
| 10555-AAB | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 5.71 | 66.93 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.77 | 66.97 | 16.13 | | 150.0 | |
| | | Z | 5.58 | 67.01 | 16.08 | | 150.0 | |
| 10556-AAB | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 5.77 | 67.11 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.81 | 67.07 | 16.17 | | 150.0 | |
| | | Z | 5.62 | 67.15 | 16.14 | | 150.0 | |
| 10557-AAB | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 5.70 | 66.90 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.77 | 66.95 | 16.13 | | 150.0 | |
| | | Z | 5.59 | 67.04 | 16.11 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10558-AAB | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | X | 5.69 | 66.90 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.78 | 67.01 | 16.18 | | 150.0 | |
| | | Z | 5.56 | 67.00 | 16.10 | | 150.0 | |
| 10560-AAB | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | X | 5.72 | 66.86 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.80 | 66.93 | 16.18 | | 150.0 | |
| | | Z | 5.60 | 66.99 | 16.14 | | 150.0 | |
| 10561-AAB | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | X | 5.66 | 66.87 | 16.32 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.73 | 66.92 | 16.20 | | 150.0 | |
| | | Z | 5.53 | 66.96 | 16.15 | | 150.0 | |
| 10562-AAB | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | X | 5.70 | 66.99 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.78 | 67.08 | 16.28 | | 150.0 | |
| | | Z | 5.57 | 67.08 | 16.21 | | 150.0 | |
| 10563-AAB | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | X | 5.83 | 67.06 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.88 | 67.05 | 16.23 | | 150.0 | |
| | | Z | 5.69 | 67.13 | 16.21 | | 150.0 | |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle) | X | 4.54 | 66.89 | 16.37 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.63 | 66.82 | 16.23 | | 150.0 | |
| | | Z | 4.43 | 67.15 | 16.24 | | 150.0 | |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 4.73 | 67.33 | 16.71 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.83 | 67.24 | 16.56 | | 150.0 | |
| | | Z | 4.62 | 67.61 | 16.60 | | 150.0 | |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.57 | 67.12 | 16.50 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.67 | 67.04 | 16.35 | | 150.0 | |
| | | Z | 4.45 | 67.36 | 16.36 | | 150.0 | |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 4.61 | 67.61 | 16.94 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.71 | 67.49 | 16.76 | | 150.0 | |
| | | Z | 4.52 | 67.92 | 16.85 | | 150.0 | |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.44 | 66.77 | 16.18 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.56 | 66.75 | 16.07 | | 150.0 | |
| | | Z | 4.30 | 66.87 | 15.96 | | 150.0 | |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.62 | 67.93 | 17.13 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.70 | 67.74 | 16.91 | | 150.0 | |
| | | Z | 4.54 | 68.30 | 17.08 | | 150.0 | |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 4.60 | 67.62 | 16.96 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.69 | 67.48 | 16.77 | | 150.0 | |
| | | Z | 4.49 | 67.91 | 16.87 | | 150.0 | |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | X | 1.06 | 65.12 | 15.94 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.10 | 64.13 | 15.18 | | 130.0 | |
| | | Z | 1.03 | 64.76 | 15.54 | | 130.0 | |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | X | 1.08 | 65.91 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.12 | 64.69 | 15.54 | | 130.0 | |
| | | Z | 1.04 | 65.49 | 16.01 | | 130.0 | |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | X | 100.00 | 148.16 | 38.24 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.56 | 82.04 | 21.65 | | 130.0 | |
| | | Z | 5.25 | 106.01 | 29.47 | | 130.0 | |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | X | 1.42 | 75.83 | 21.21 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.20 | 70.29 | 18.45 | | 130.0 | |
| | | Z | 1.26 | 74.01 | 20.40 | | 130.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle) | X | 4.33 | 66.73 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.42 | 66.59 | 16.25 | | 130.0 | |
| | | Z | 4.21 | 66.91 | 16.24 | | 130.0 | |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle) | X | 4.37 | 66.97 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.45 | 66.81 | 16.35 | | 130.0 | |
| | | Z | 4.25 | 67.19 | 16.37 | | 130.0 | |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.52 | 67.20 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.61 | 67.05 | 16.50 | | 130.0 | |
| | | Z | 4.39 | 67.40 | 16.51 | | 130.0 | |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.44 | 67.39 | 16.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.52 | 67.21 | 16.62 | | 130.0 | |
| | | Z | 4.32 | 67.63 | 16.68 | | 130.0 | |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.17 | 66.41 | 15.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.27 | 66.33 | 15.82 | | 130.0 | |
| | | Z | 4.03 | 66.48 | 15.71 | | 130.0 | |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.20 | 66.45 | 15.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.30 | 66.37 | 15.83 | | 130.0 | |
| | | Z | 4.03 | 66.43 | 15.66 | | 130.0 | |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.36 | 67.52 | 16.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.43 | 67.28 | 16.58 | | 130.0 | |
| | | Z | 4.25 | 67.77 | 16.69 | | 130.0 | |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.09 | 66.15 | 15.71 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.19 | 66.07 | 15.58 | | 130.0 | |
| | | Z | 3.93 | 66.16 | 15.43 | | 130.0 | |
| 10583-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | X | 4.33 | 66.73 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.42 | 66.59 | 16.25 | | 130.0 | |
| | | Z | 4.21 | 66.91 | 16.24 | | 130.0 | |
| 10584-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | X | 4.37 | 66.97 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.45 | 66.81 | 16.35 | | 130.0 | |
| | | Z | 4.25 | 67.19 | 16.37 | | 130.0 | |
| 10585-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | X | 4.52 | 67.20 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.61 | 67.05 | 16.50 | | 130.0 | |
| | | Z | 4.39 | 67.40 | 16.51 | | 130.0 | |
| 10586-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | X | 4.44 | 67.39 | 16.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.52 | 67.21 | 16.62 | | 130.0 | |
| | | Z | 4.32 | 67.63 | 16.68 | | 130.0 | |
| 10587-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | X | 4.17 | 66.41 | 15.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.27 | 66.33 | 15.82 | | 130.0 | |
| | | Z | 4.03 | 66.48 | 15.71 | | 130.0 | |
| 10588-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | X | 4.20 | 66.45 | 15.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.30 | 66.37 | 15.83 | | 130.0 | |
| | | Z | 4.03 | 66.43 | 15.66 | | 130.0 | |
| 10589-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | X | 4.36 | 67.52 | 16.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.43 | 67.28 | 16.58 | | 130.0 | |
| | | Z | 4.25 | 67.77 | 16.69 | | 130.0 | |
| 10590-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | X | 4.09 | 66.15 | 15.71 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.19 | 66.07 | 15.58 | | 130.0 | |
| | | Z | 3.93 | 66.16 | 15.43 | | 130.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10591-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.49 | 66.83 | 16.58 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.58 | 66.69 | 16.39 | | 130.0 | |
| | | Z | 4.38 | 67.05 | 16.41 | | 130.0 | |
| 10592-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 4.60 | 67.11 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.70 | 66.98 | 16.51 | | 130.0 | |
| | | Z | 4.47 | 67.30 | 16.52 | | 130.0 | |
| 10593-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.52 | 66.97 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.61 | 66.85 | 16.36 | | 130.0 | |
| | | Z | 4.39 | 67.15 | 16.35 | | 130.0 | |
| 10594-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 4.58 | 67.18 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.67 | 67.04 | 16.54 | | 130.0 | |
| | | Z | 4.45 | 67.37 | 16.56 | | 130.0 | |
| 10595-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.54 | 67.16 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.63 | 67.01 | 16.44 | | 130.0 | |
| | | Z | 4.41 | 67.33 | 16.45 | | 130.0 | |
| 10596-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.47 | 67.10 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.56 | 66.97 | 16.43 | | 130.0 | |
| | | Z | 4.33 | 67.23 | 16.41 | | 130.0 | |
| 10597-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.42 | 66.95 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.51 | 66.83 | 16.28 | | 130.0 | |
| | | Z | 4.29 | 67.09 | 16.24 | | 130.0 | |
| 10598-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.43 | 67.26 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.51 | 67.10 | 16.57 | | 130.0 | |
| | | Z | 4.32 | 67.48 | 16.62 | | 130.0 | |
| 10599-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.20 | 67.31 | 16.86 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.25 | 67.14 | 16.63 | | 130.0 | |
| | | Z | 5.07 | 67.41 | 16.66 | | 130.0 | |
| 10600-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.32 | 67.75 | 17.05 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.35 | 67.47 | 16.76 | | 130.0 | |
| | | Z | 5.09 | 67.50 | 16.68 | | 130.0 | |
| 10601-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.22 | 67.51 | 16.96 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.25 | 67.27 | 16.68 | | 130.0 | |
| | | Z | 5.07 | 67.56 | 16.73 | | 130.0 | |
| 10602-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.29 | 67.46 | 16.84 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.35 | 67.29 | 16.61 | | 130.0 | |
| | | Z | 5.08 | 67.29 | 16.50 | | 130.0 | |
| 10603-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.35 | 67.74 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.42 | 67.61 | 16.91 | | 130.0 | |
| | | Z | 5.13 | 67.56 | 16.79 | | 130.0 | |
| 10604-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.20 | 67.21 | 16.84 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.30 | 67.25 | 16.71 | | 130.0 | |
| | | Z | 5.02 | 67.15 | 16.55 | | 130.0 | |
| 10605-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.28 | 67.48 | 16.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.34 | 67.34 | 16.74 | | 130.0 | |
| | | Z | 5.07 | 67.33 | 16.64 | | 130.0 | |
| 10606-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.08 | 66.97 | 16.56 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.12 | 66.78 | 16.32 | | 130.0 | |
| | | Z | 4.92 | 66.93 | 16.28 | | 130.0 | |