

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFCVSF-WTW-P25090814-2

FCC ID: PKRISGM4010

Product: Wireless Hotspot

Brand: Inseego

Model No.: M4010

Received Date: 2025/11/17

Test Date: 2025/12/9 ~ 2025/12/16

Issued Date: 2026/1/12

Applicant: Inseego Corp.

Address: 9710 Scranton Road, Suite 200, San Diego, CA 92121, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration /
Designation Number: 788550 / TW0003

Approved by: _____

Jeremy Lin

, Date: _____

2026/1/12

Jeremy Lin / Project Engineer

This test report consists of 151 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Vera Huang / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	7
3.3 EUT Power Level.....	8
4 Test Instruments	9
4.1 U-NII Detection Bandwidth	9
4.2 Channel Availability Check Time	9
4.3 Channel Closing Transmission and Channel Move Time	9
4.4 Non-Occupancy Period	9
4.5 Statistical Performance Check	9
5 Limits of Test Items.....	10
5.1 Working Modes and Required Test Items	10
5.2 Test Limits and Radar Signal Parameters	11
6 Test Arrangements.....	14
6.1 Test Setup.....	14
6.2 Test Procedure	15
6.2.1 DFS Measurement System.....	15
6.2.2 Calibration of DFS Detection Threshold Level.....	18
6.2.3 DFS Detection Threshold.....	19
6.2.4 DFS Companion Device	23
7 Test Results of Test Item	24
7.1 U-NII Detection Bandwidth	24
7.2 Channel Availability Check Time	30
7.3 Channel Closing Transmission and Channel Move Time	32
7.4 Non-Occupancy Period	37
7.5 Statistical Performance Check	39
8 Declaration of Conformity by the Manufacturer	70
8.1 Transmit Power Control (TPC)	70
8.2 Statement of Manufacturer	70
9 Pictures of Test Arrangements	71
10 Information of the Testing Laboratories	72
11 Appendix.....	73
11.1 Radar Test Signal	73

Release Control Record

Issue No.	Description	Date Issued
RFCVSF-WTW-P25090814-2	Original Release	2026/1/12

1 Certificate

Product: Wireless Hotspot

Brand: Inseego

Test Model: M4010

Sample Status: Engineering sample

Applicant: Inseego Corp.

Test Date: 2025/12/9 ~ 2025/12/16

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(h)	U-NII Detection Bandwidth	Pass	Applicable
15.407(h)	Channel Availability Check Time	Pass	Applicable
15.407(h)	Channel Closing Transmission and Channel Move Time	Pass	Applicable
15.407(h)	Non-Occupancy Period	Pass	Applicable
15.407(h)	Statistical Performance Check	Pass	Applicable
15.407(h)	Non-Associated Test	N/A	Not Applicable

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless Hotspot
Brand	Inseego
Test Model	M4010
Market Model Name	M4000, M4040
Model Difference	Marketing purpose
DFS Firmware/software version	1.012
Operational Mode	Master
Operating Frequency Band	5.25 GHz ~ 5.35 GHz 5.47 GHz ~ 5.725 GHz
Communication Mode	IP based
Channel Puncturing Function	Not Support

Note: The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	Antenna Gain (dBi)	Frequency range	Antenna Type	Connector Type
0	1.92	2.4 GHz ~ 2.4835 GHz	PIFA	Contact spring
	1.94	5.15 GHz ~ 5.25 GHz	PIFA	Contact spring
	1.88	5.25 GHz ~ 5.35 GHz	PIFA	Contact spring
	1.85	5.47 GHz ~ 5.725 GHz	PIFA	Contact spring
	1.94	5.725 GHz ~ 5.85 GHz	PIFA	Contact spring
1	1.95	2.4 GHz ~ 2.4835 GHz	PIFA	Contact spring
	1.91	5.15 GHz ~ 5.25 GHz	PIFA	Contact spring
	1.94	5.25 GHz ~ 5.35 GHz	PIFA	Contact spring
	1.96	5.47 GHz ~ 5.725 GHz	PIFA	Contact spring
	1.96	5.725 GHz ~ 5.85 GHz	PIFA	Contact spring

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	1TX (Diversity)	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ac (VHT160)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
802.11ax (HE160)	2TX	2RX
802.11be (EHT20)	2TX	2RX
802.11be (EHT40)	2TX	2RX
802.11be (EHT80)	2TX	2RX
802.11be (EHT160)	2TX	2RX
802.11ax (RU26/52/106/242/484/996/996x2)	2TX	2RX
802.11be (RU26/52/106/242/484/996/996x2 MRU52+26/106+26/484+242/996+484)	2TX	2RX

3.3 EUT Power Level

Highest Power Level						
Signal Mode	Frequency Band (MHz)	Conducted Power		Gain (dBi)	EIRP	
		(mW)	(dBm)		(mW)	(dBm)
CDD	5250-5350	60.753	17.84	1.94	94.966	19.78
	5470-5725	77.584	18.9	1.96	121.835	20.86
Beamforming	5250-5350	60.753	17.84	4.92	188.611	22.76
	5470-5725	77.584	18.9	4.92	240.864	23.82

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 U-NII Detection Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
EMI Test Receiver R&S	ESR7	101451	2025/3/31	2026/3/30
MXG Vector signal generator Keysight	N5182B	MY53052282	2025/1/6	2026/1/5
Software BV	BVDFS_Auto- ISM_Workbench_V2A2	N/A	N/A	N/A

Notes:

1. The test was performed in DFS room.
2. Tested Date: 2025/12/9 ~ 2025/12/16

4.2 Channel Availability Check Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.3 Channel Closing Transmission and Channel Move Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 Non-Occupancy Period

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Statistical Performance Check

Refer to section 4.1 to get the tested date and information of the instruments.

5 Limits of Test Items

5.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 1: Applicability of DFS Requirements Prior To Use a Channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓ note	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Note: Per KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.

Table 2: Applicability of DFS Requirements during Normal Operation.

Requirement	Operational Mode	
	Master or Client with radar detection	Client without radar detection
DFS Detection Threshold	✓	Not required
Channel Closing Transmission Time	✓	✓
Channel Move Time	✓	✓
U-NII Detection Bandwidth	✓	Not required

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

5.2 Test Limits and Radar Signal Parameters

Detection Threshold Values

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Parameters of DFS Test Waveforms

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a ----- Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left(\left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 6: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30
Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency. a) the Channel center frequency b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth It include 10 trails for every subset, the formula as below, For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel. For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by: $FL + (0.4 * \text{Chirp Width [in MHz]})$ For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by: $FH - (0.4 * \text{Chirp Width [in MHz]})$							

Table 7: Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

6 Test Arrangements

6.1 Test Setup

Conducted measurement

Master Mode

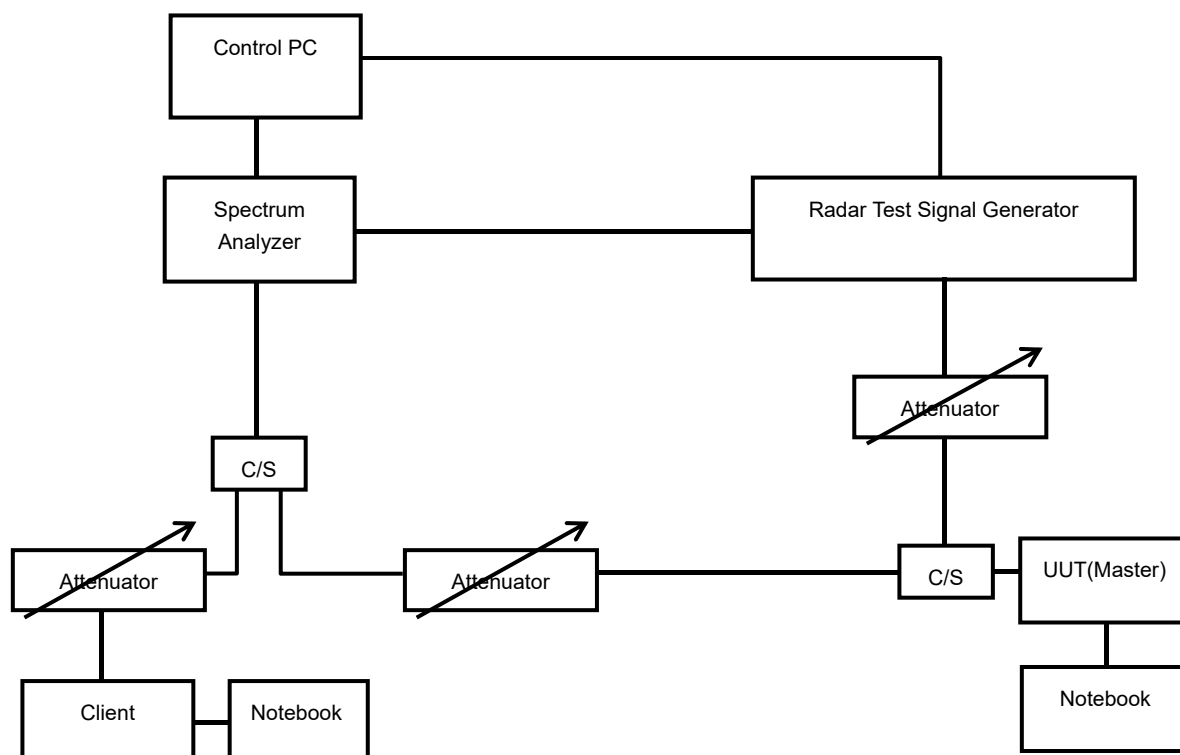


The UUT is a U-NII Device operating in Master mode. The radar test signals are injected into the Master Device.

6.2 Test Procedure

6.2.1 DFS Measurement System

A complete DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating system and (2) the Traffic Monitoring system. The control PC is necessary for generating the Radar waveforms in Table 5, 6 and 7. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

Conducted Setup Configuration of DFS Measurement System

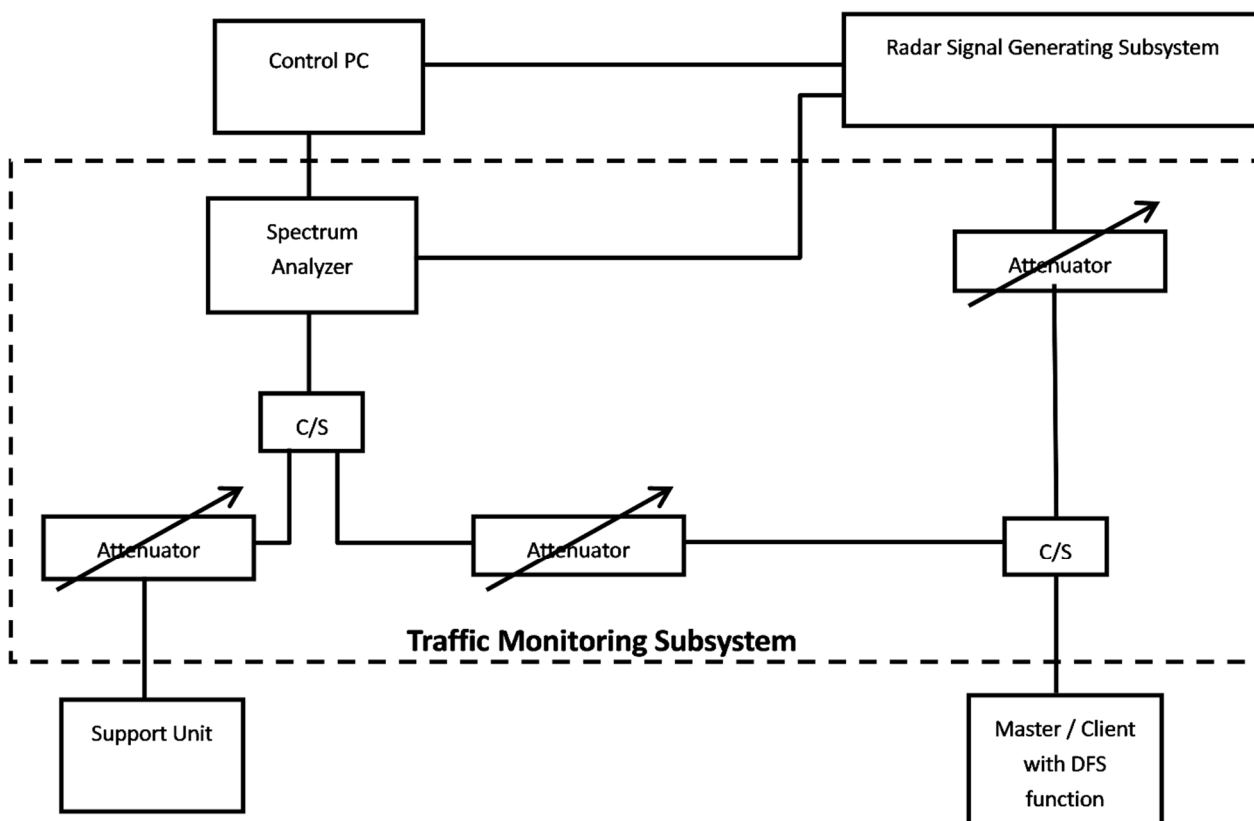


Channel Loading

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

Applicable	Requirements apply
	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
√	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.


Plots of Channel Loading

Duty Cycle

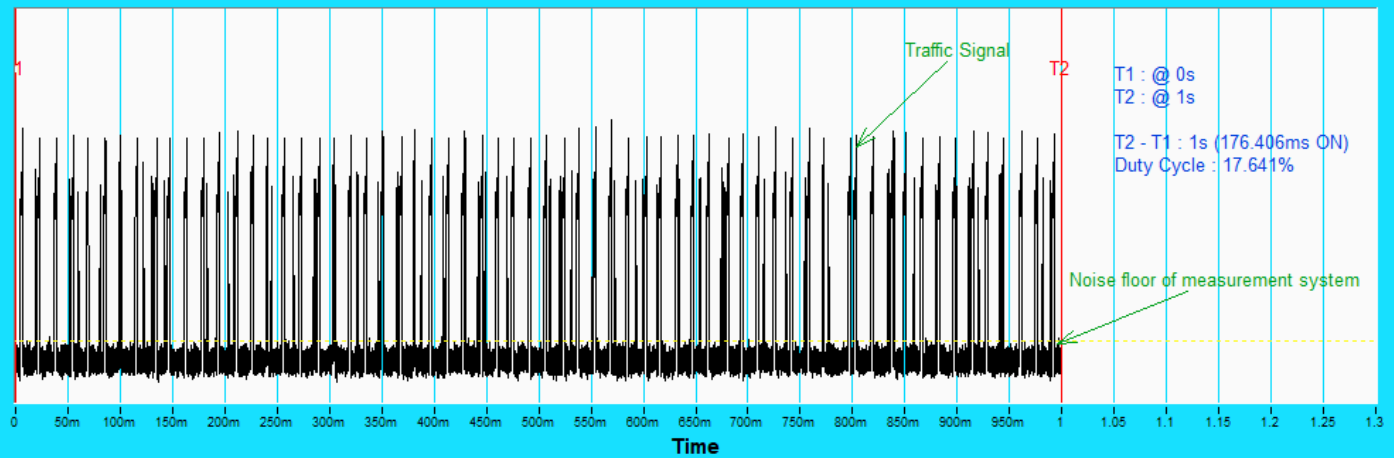


802.11be (EHT20)

Duty Cycle

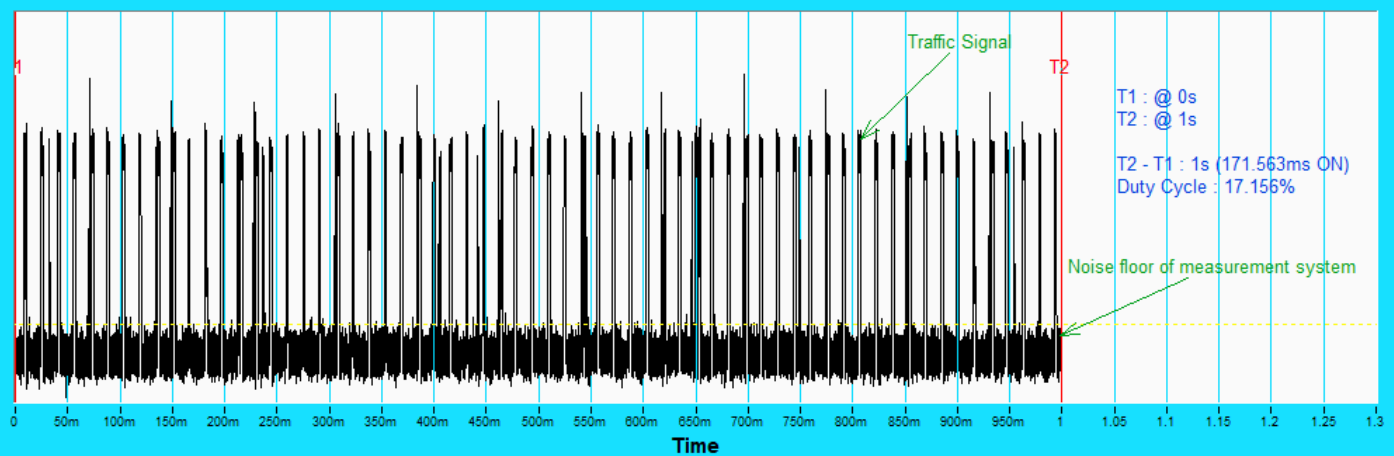

802.11be (EHT40)


Duty Cycle

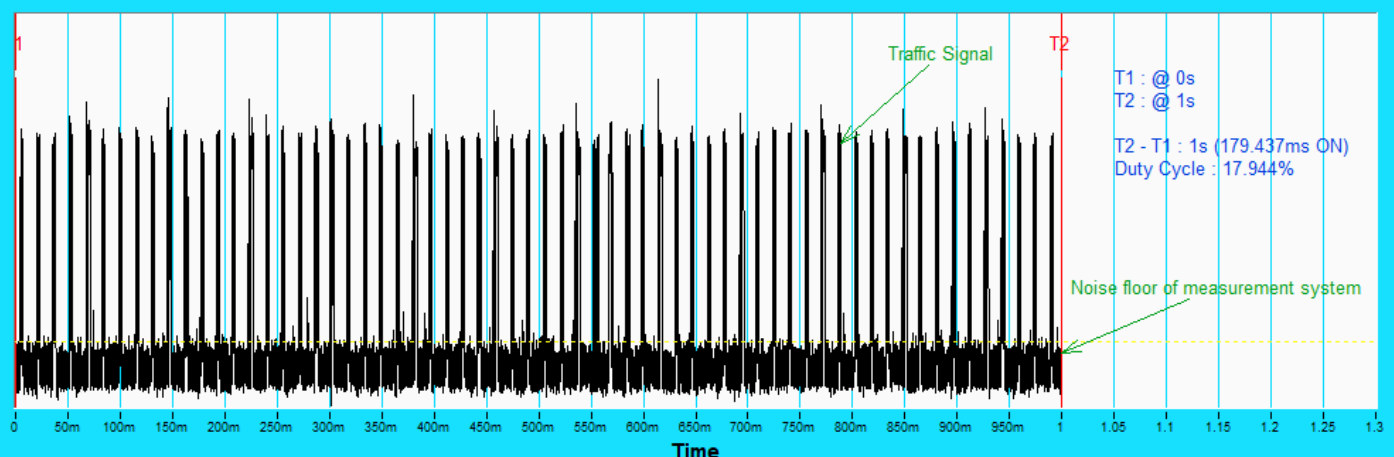

802.11be (EHT80)

Plots of Channel Loading

Duty Cycle

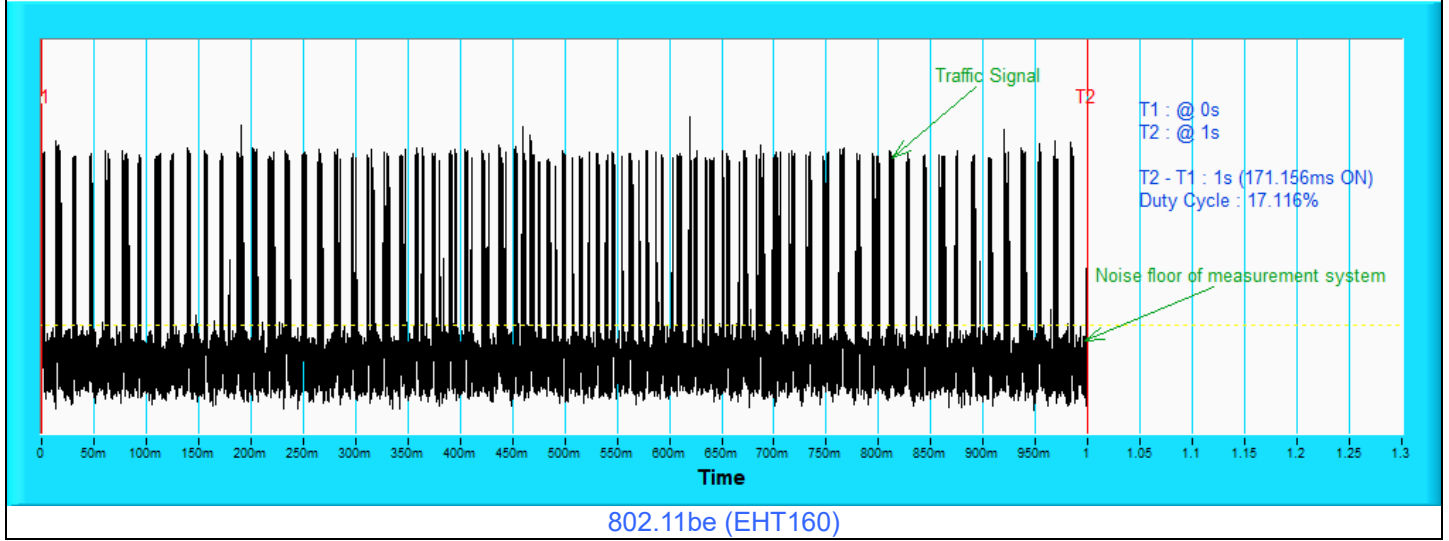


6.2.2 Calibration of DFS Detection Threshold Level

The measured channel is chosen from the operating channels of the UUT within the DFS band and using the all bandwidth mode available for the link. The radar signal was the same as transmitted channels, and injected into the antenna of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

Conducted Setup Configuration of Calibration of DFS Detection Threshold Level

The calibrated conducted detection threshold level is set to -64 dBm. The tested level is lower than required level hence it provides margin to the limit.

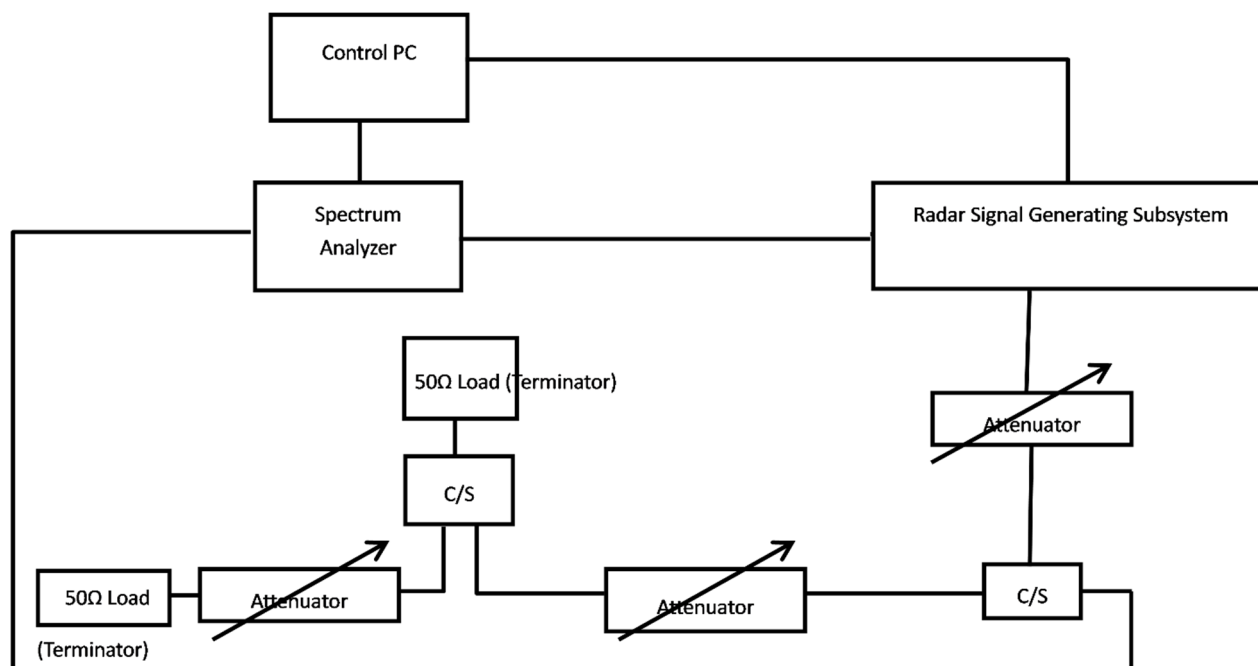

6.2.3 DFS Detection Threshold


Test Mode: Device Operating in Master Mode


The radar test waveforms are injected into the Master.

The antenna net gain is 1.85 dBi.


DFS Detection Threshold = $-64 \text{ dBm} + 1.85 \text{ dBi} = -62.15 \text{ dBm}$

The calibrated conducted detection threshold level is lower than -62.15 dBm .

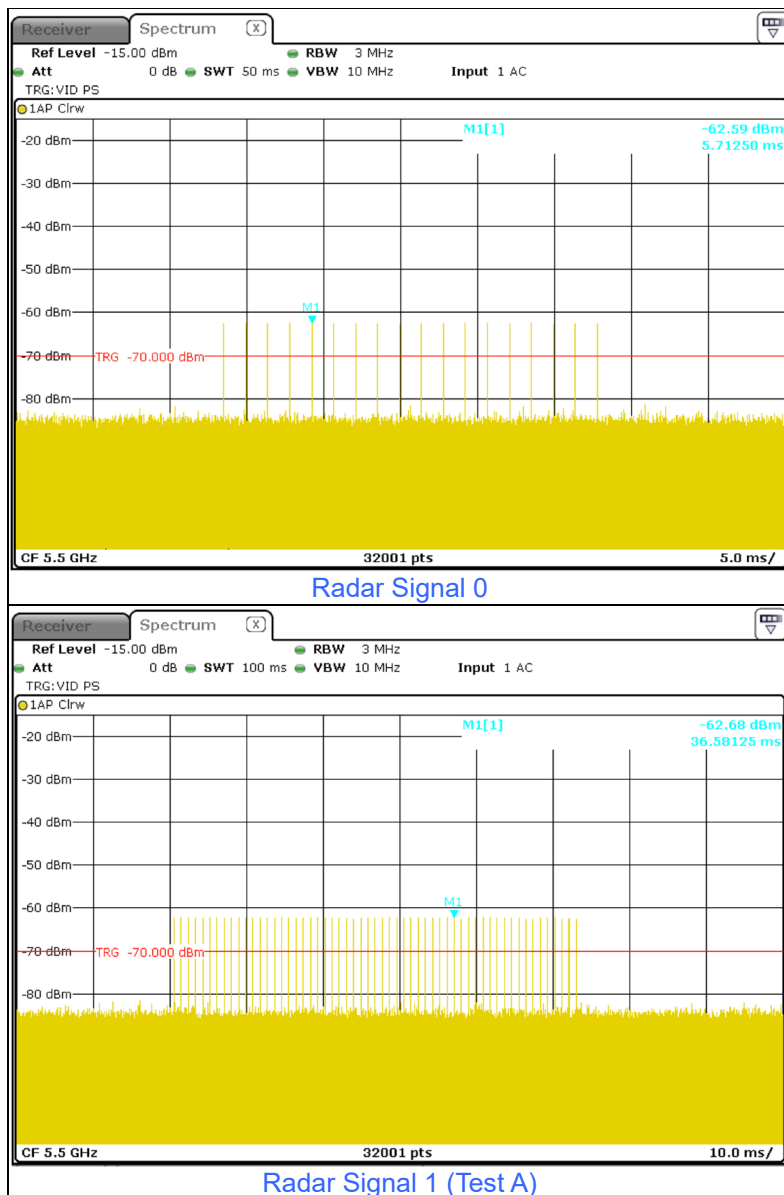


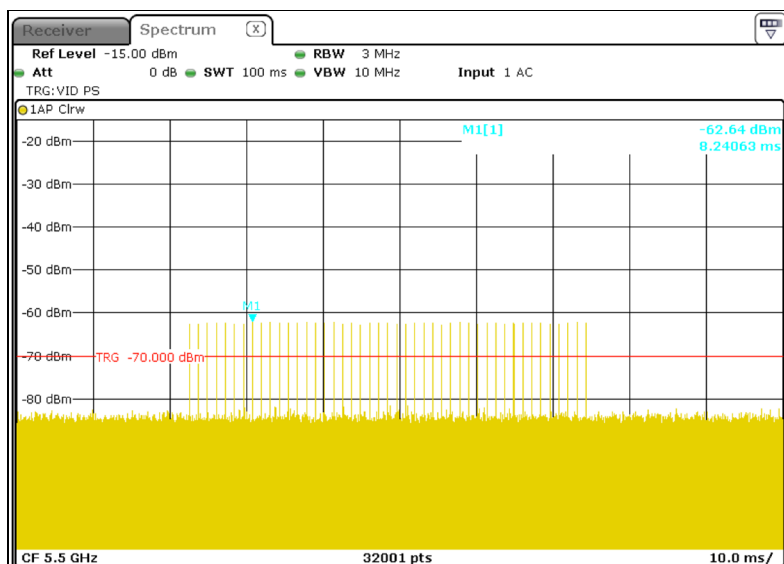


Radar Signal 1 (Test B)

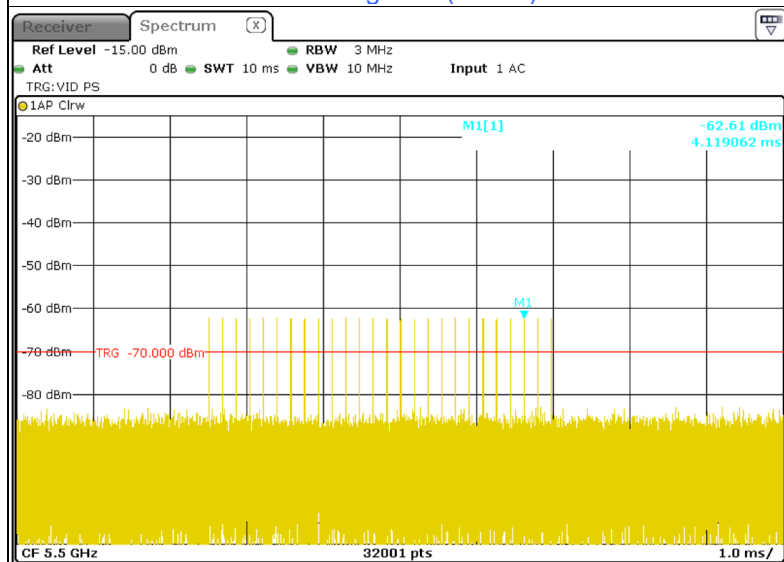


Radar Signal 2

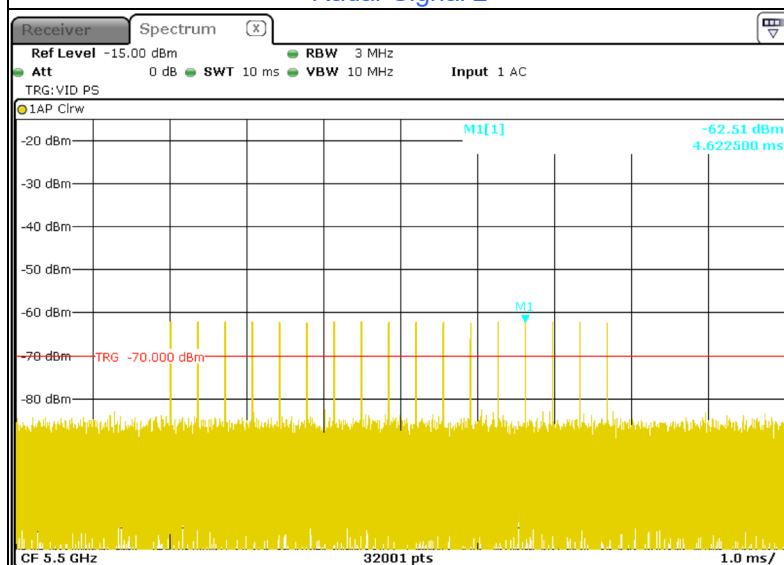

Radar Signal 3

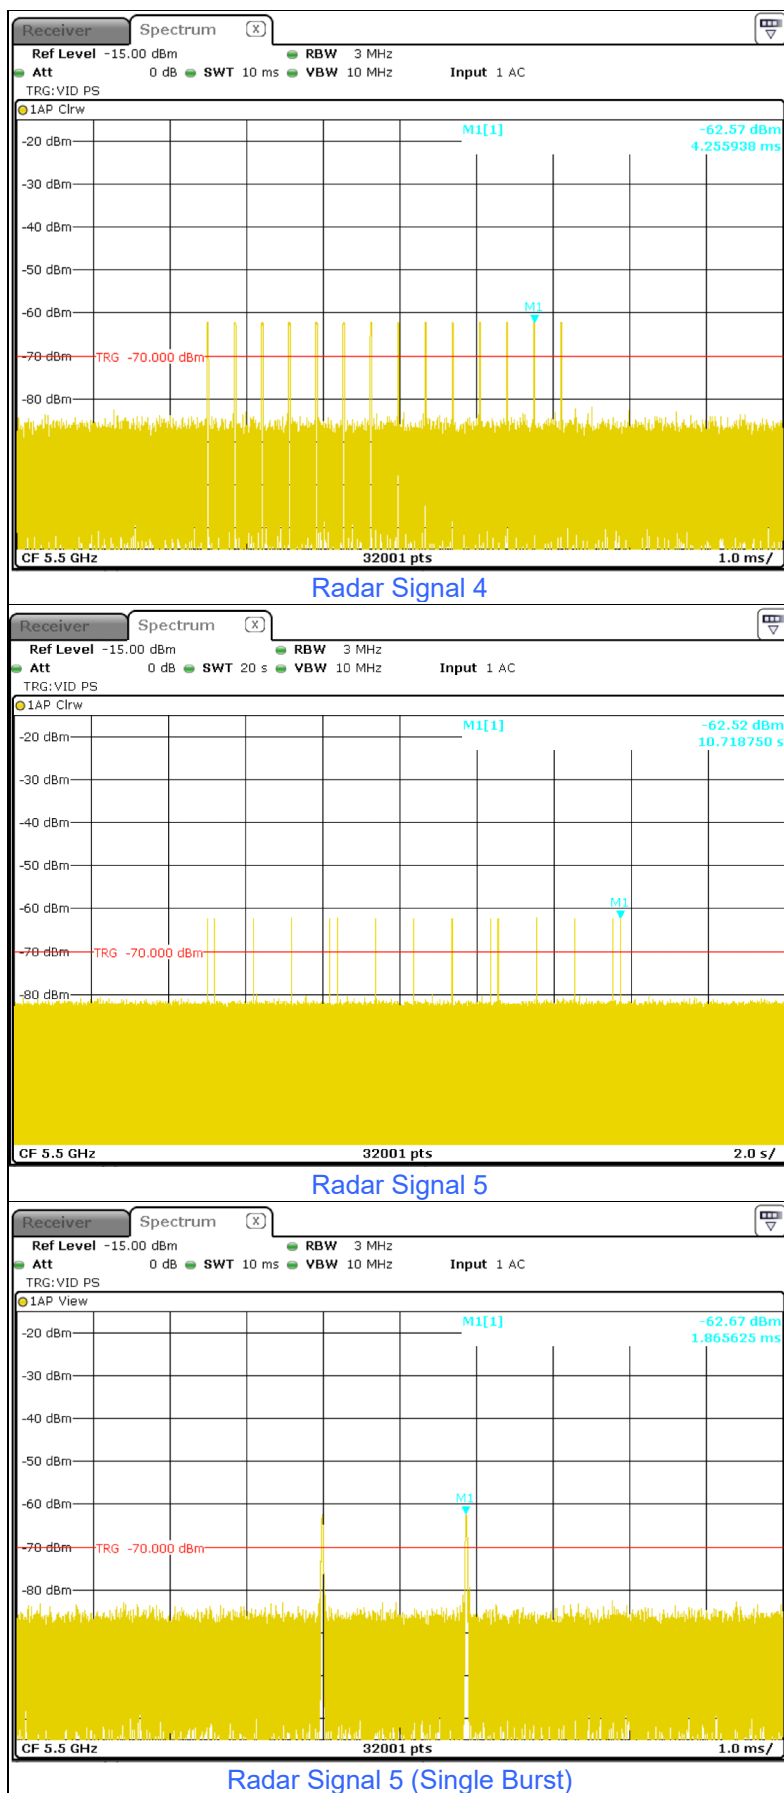

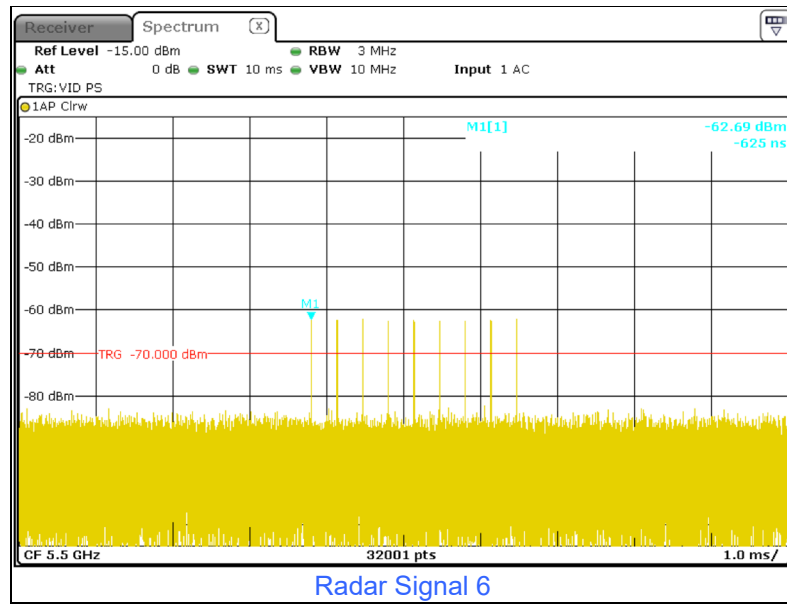

6.2.4 DFS Companion Device

Companion Device Information				
Product	Brand	Model No.	FCC ID	Software/Firmware Version
BE6500 USB3.0 Wireless Adapter	NETGEAR	A9000	PY324300631	5.3.0.2649

Note: This device was functioned as a Slave device during the DFS test.


7 Test Results of Test Item

7.1 U-NII Detection Bandwidth

Environmental Conditions:	24°C, 62% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------

For 802.11be (EHT20)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5500 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 18.74 MHz Detection bandwidth (5510 MHz (FH) – 5490 MHz (FL)): 20 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Percentage of Successful Detection	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

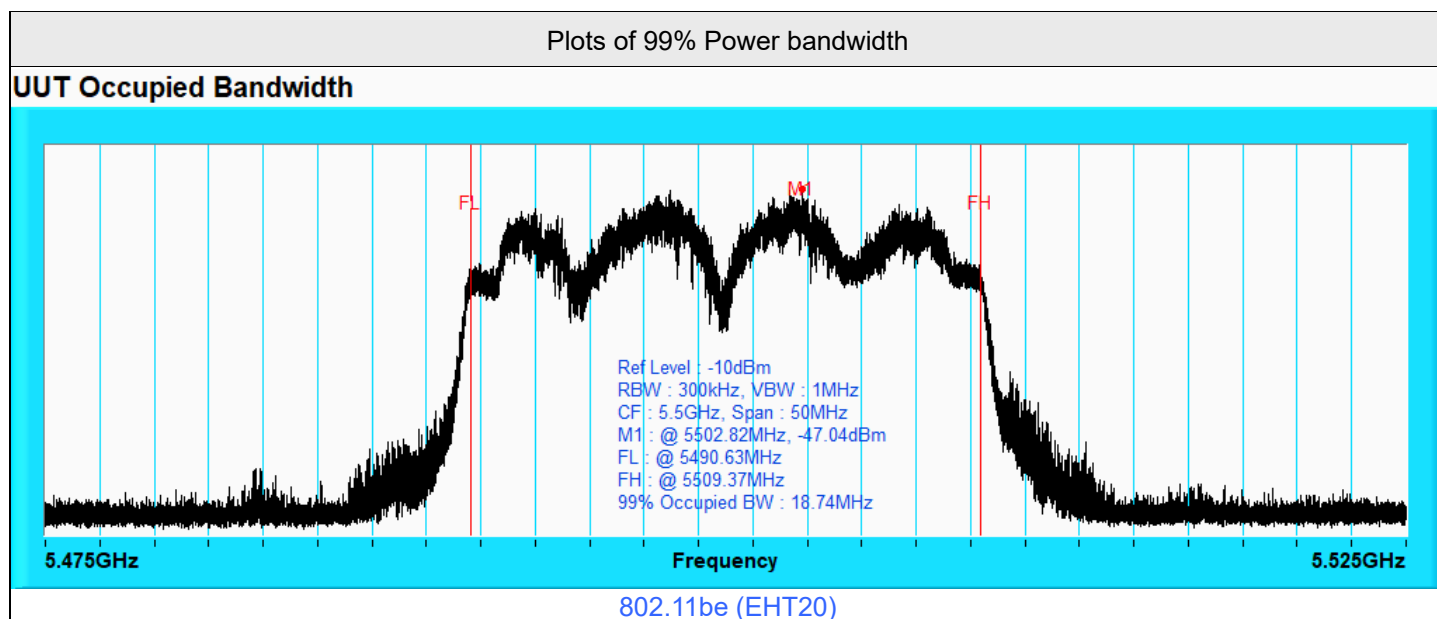

802.11be (EHT40)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5510 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 37.49 MHz

Detection bandwidth (5530 MHz (FH) – 5490 MHz (FL)): 40 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

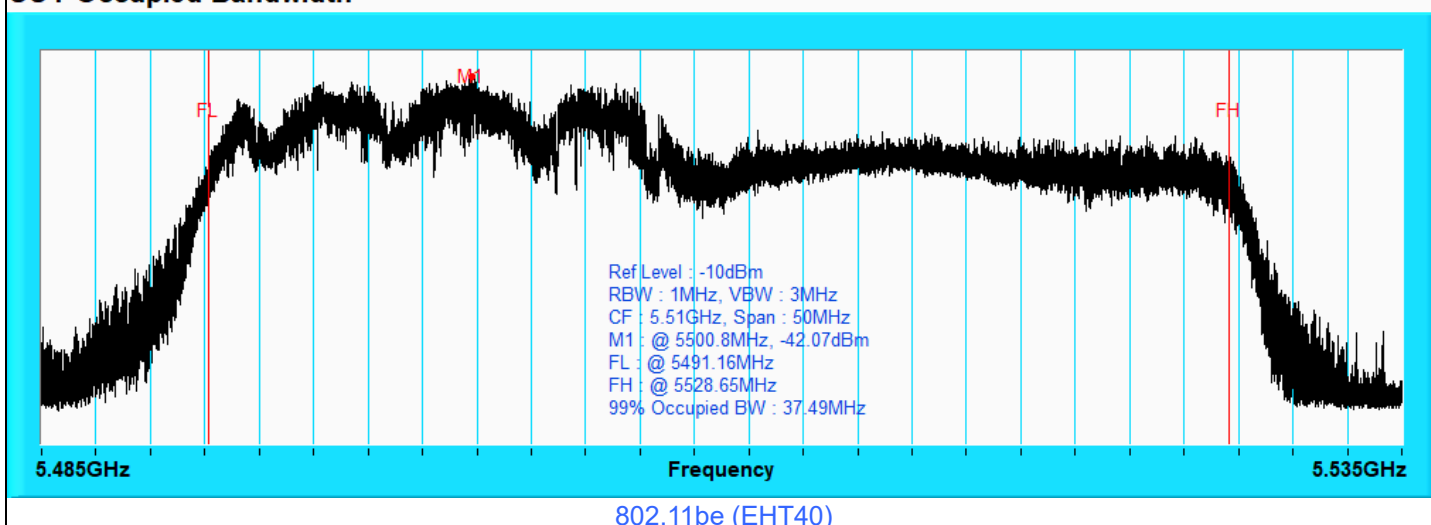

802.11be (EHT80)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5530 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 77.23 MHz

Detection bandwidth (5570 MHz (FH) – 5490 MHz (FL)): 80 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

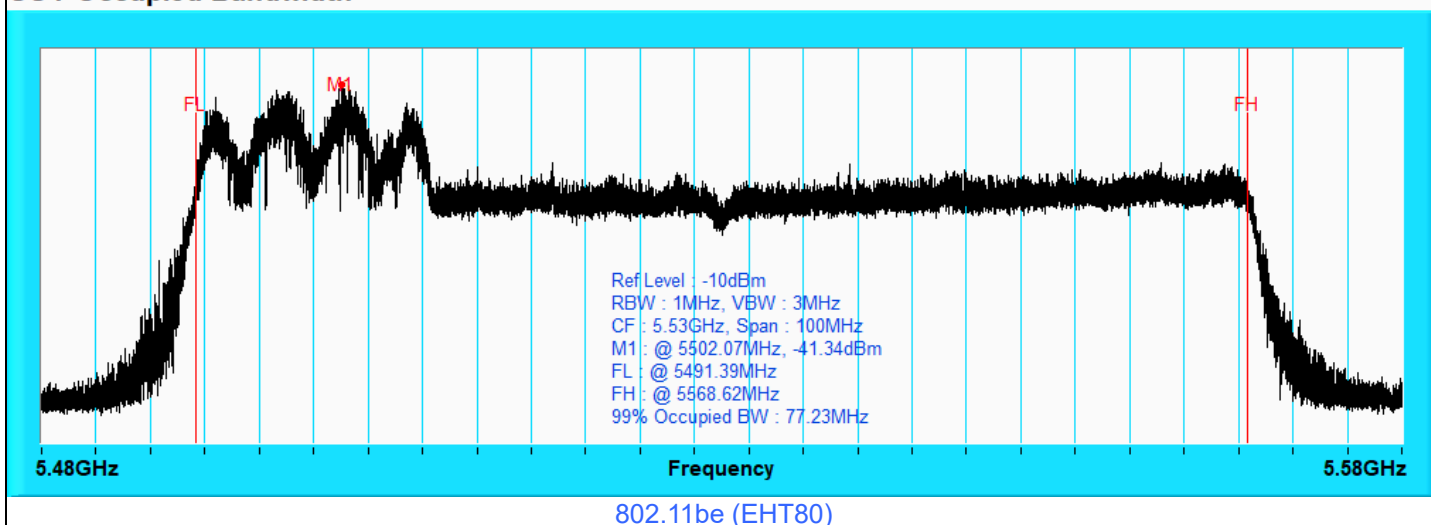

802.11be (EHT160) CH50

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5250 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 154.83 MHz


Detection bandwidth (5330 MHz (FH) – 5250 MHz (FL)): 80 MHz

(160 MHz channel (5250 MHz) straddle between 5150 ~ 5250 MHz and 5250 ~ 5350 MHz, the DFS ability is necessary in 5250 ~ 5350 MHz, therefore DFS detection bandwidth start from 5250 MHz for 802.11be (EHT160) mode.)

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5250 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5255	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5260	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5265	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5270	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5275	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5280	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5285	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5290	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5295	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5300	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5305	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5310	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5315	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5320	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5325	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5330 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth


UUT Occupied Bandwidth

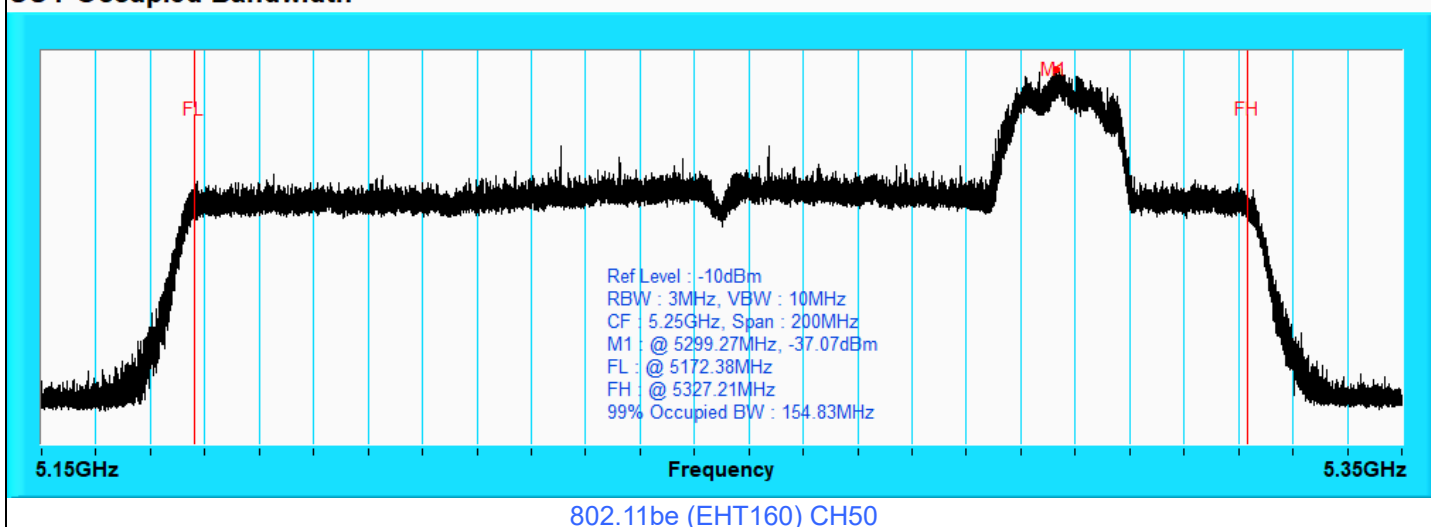

802.11be (EHT160) CH114

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5570 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 154.94 MHz Detection bandwidth (5650 MHz (FH) – 5490 MHz (FL)): 160 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5650 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

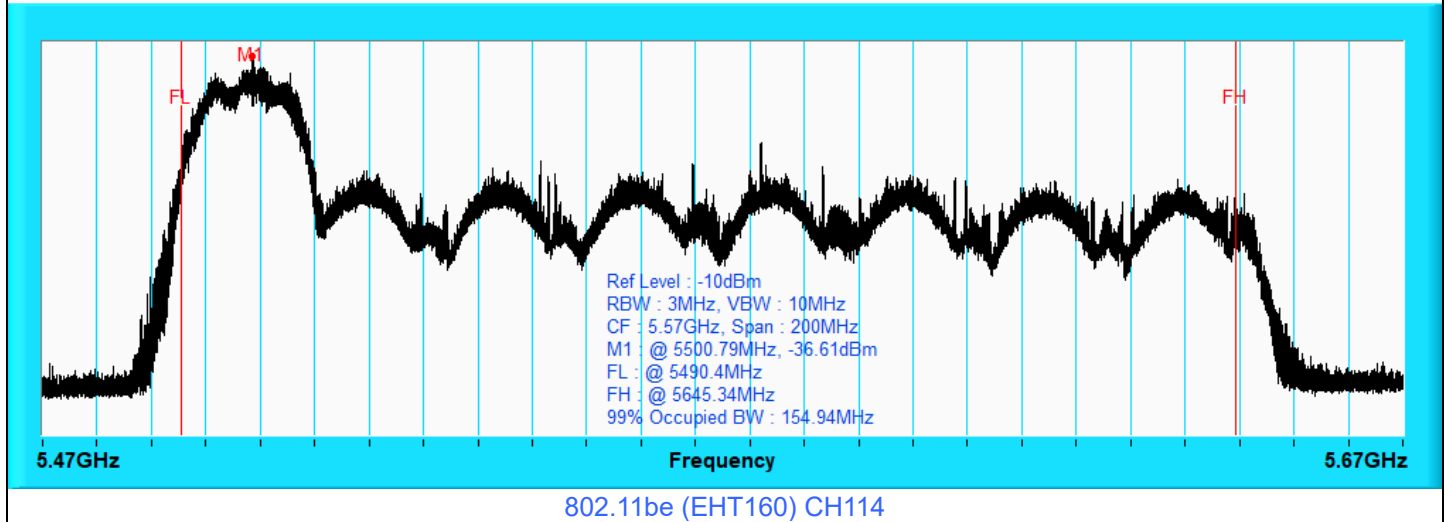UUT Occupied Bandwidth


7.2 Channel Availability Check Time

Environmental Conditions:	24°C, 62% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------


If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.

Timing of Radar Signal	Observation	
	EUT	Spectrum Analyzer
Within 0 to 6 seconds	Detected	No transmissions
Within 54 to 60 seconds	Detected	No transmissions

Note: Worst case channel for final "Channel Availability Check" test.

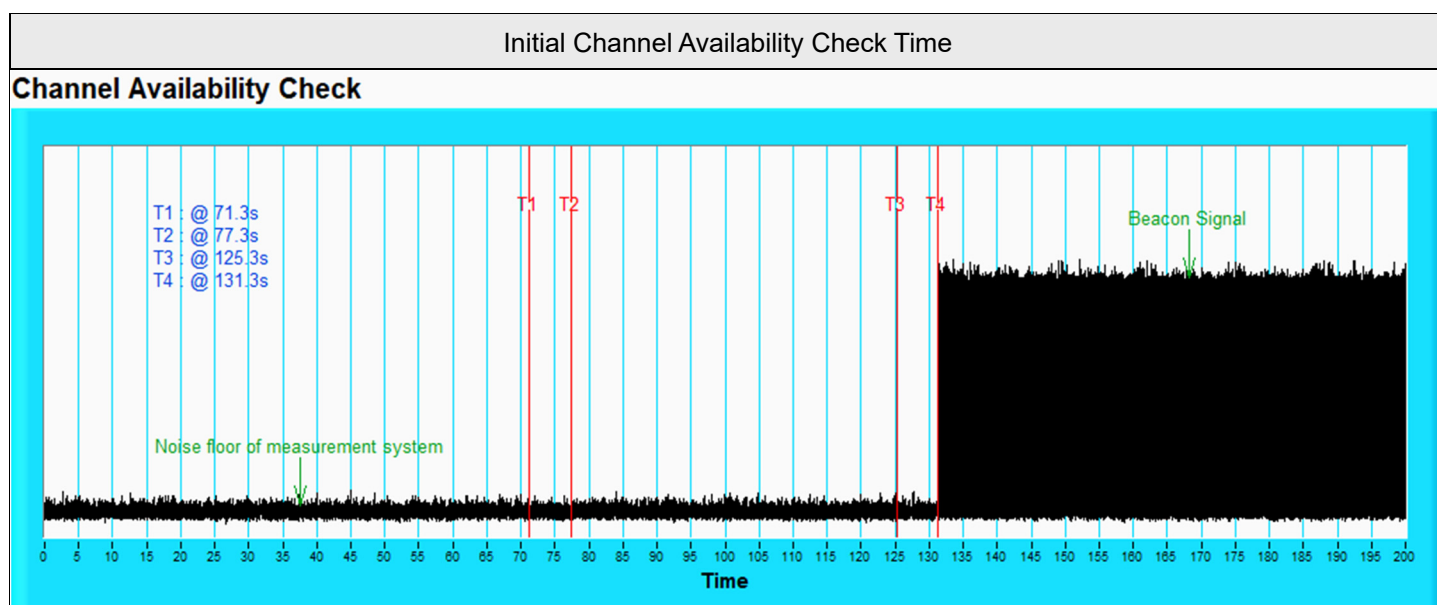


Note: T1 denotes the end of power-up time period is 71.3th second. T4 denotes the end of Channel Availability Check time is 131.3th second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

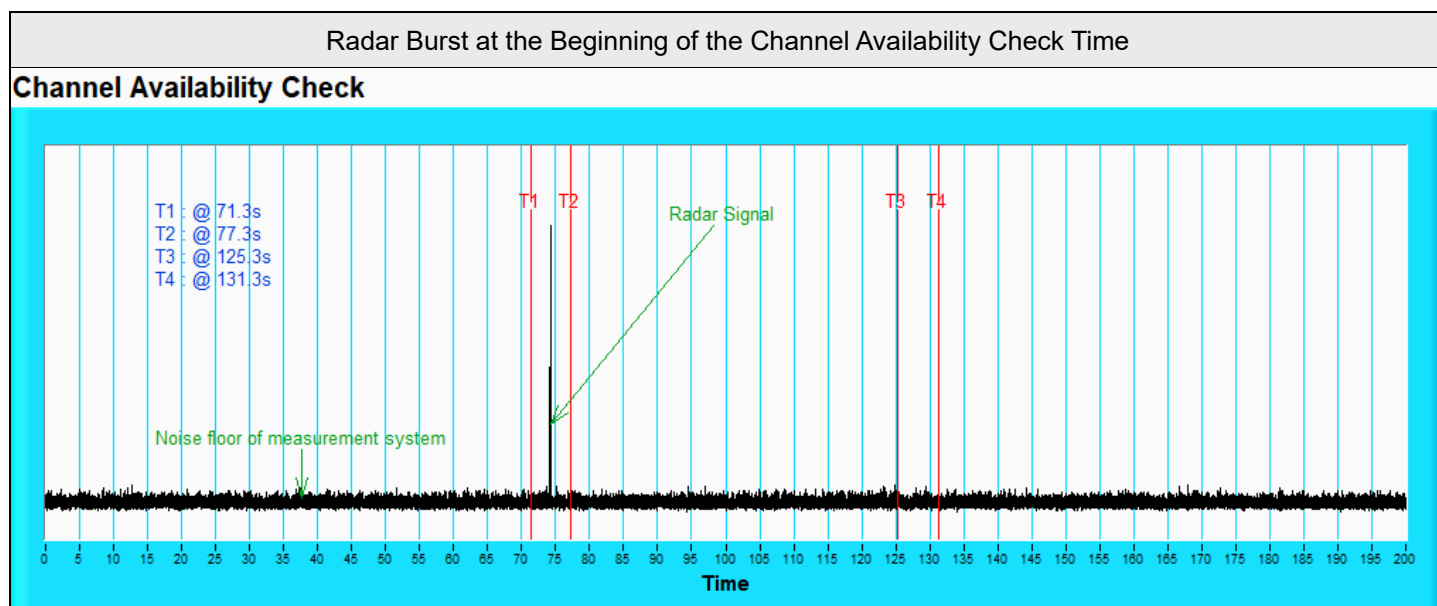

Note: T1 denotes the end of power-up time period is 71.3th second. T2 denotes 77.3th second and the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 131.3th second.

Radar Burst at the End of the Channel Availability Check Time


Channel Availability Check

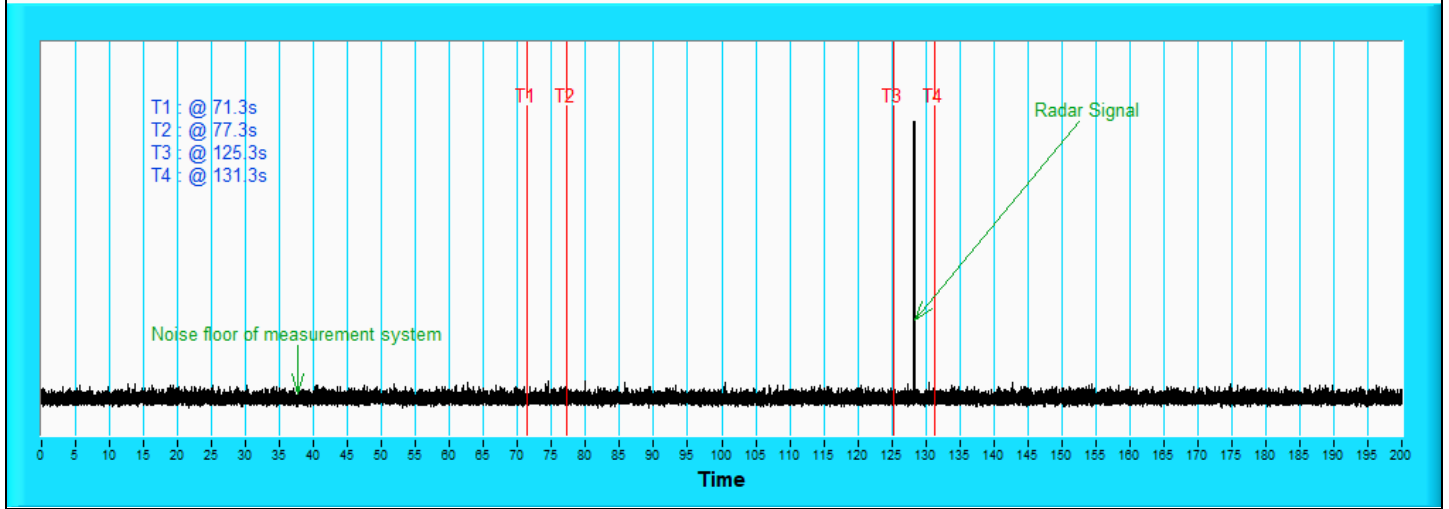


Note: T1 denotes the end of power-up time period is 71.3th second. T3 denotes 125.3th second and the radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence. T4 denotes the 131.3th second.

7.3 Channel Closing Transmission and Channel Move Time

Environmental Conditions:	24°C, 62% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------

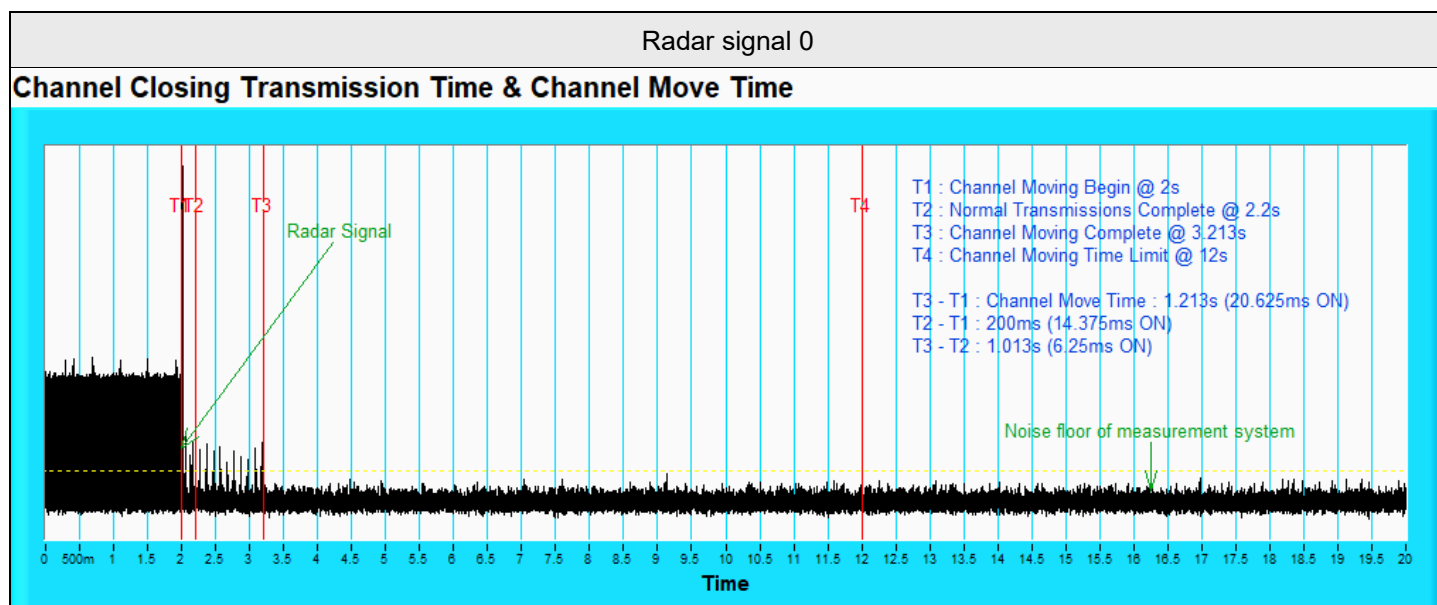


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

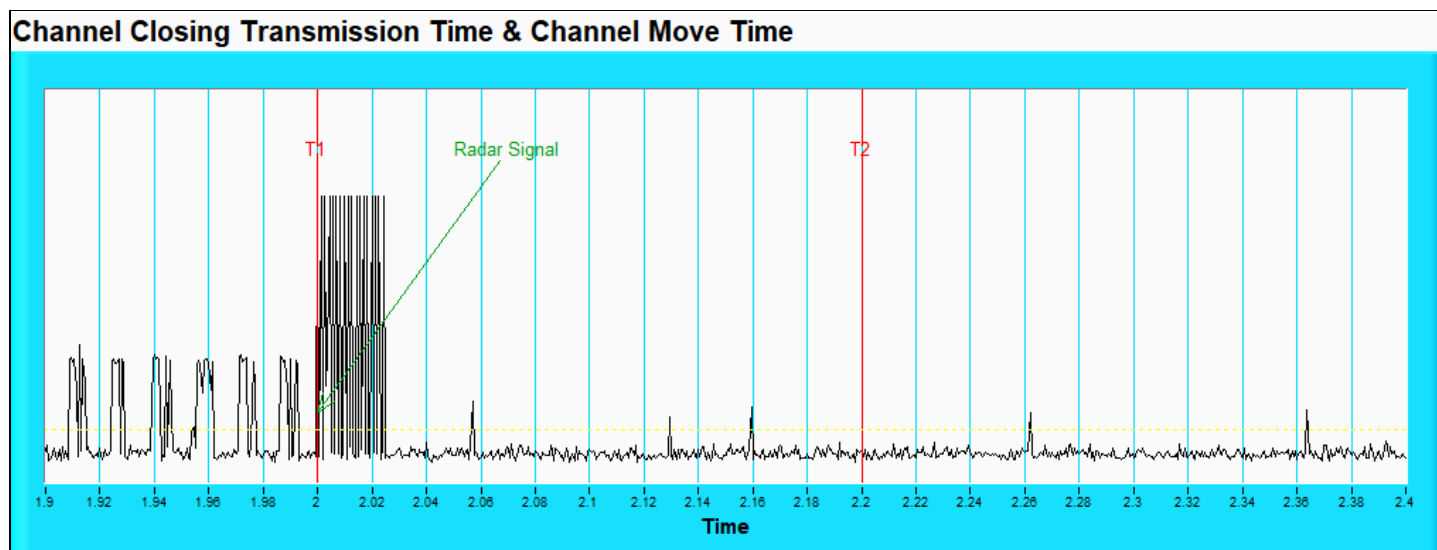

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 1

Channel Closing Transmission Time & Channel Move Time

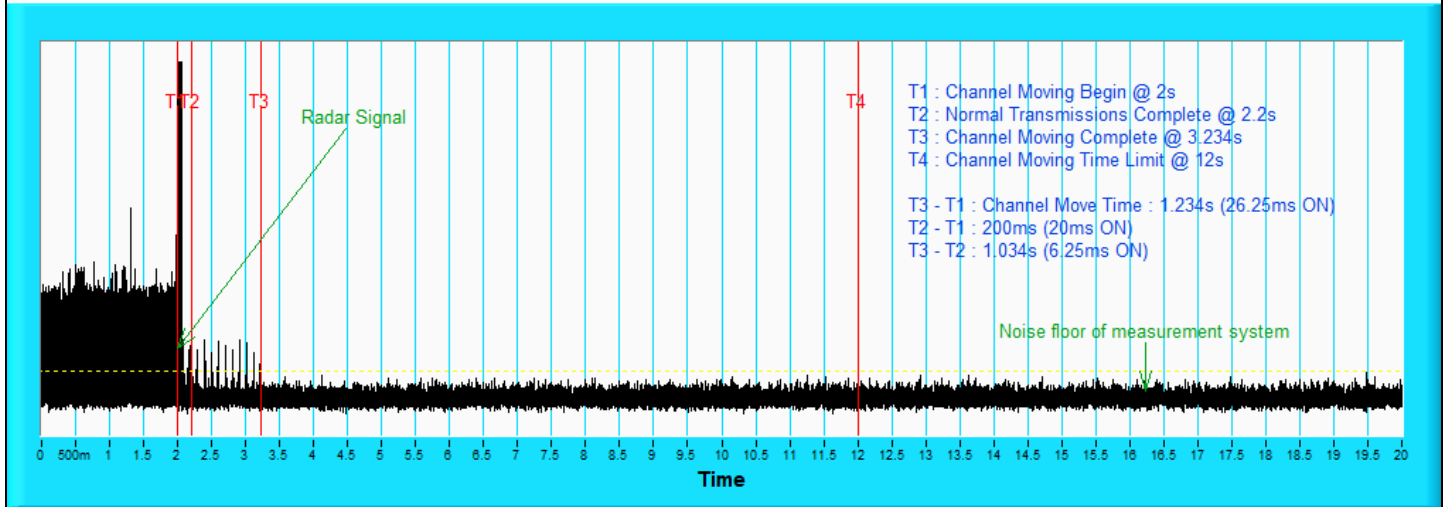

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

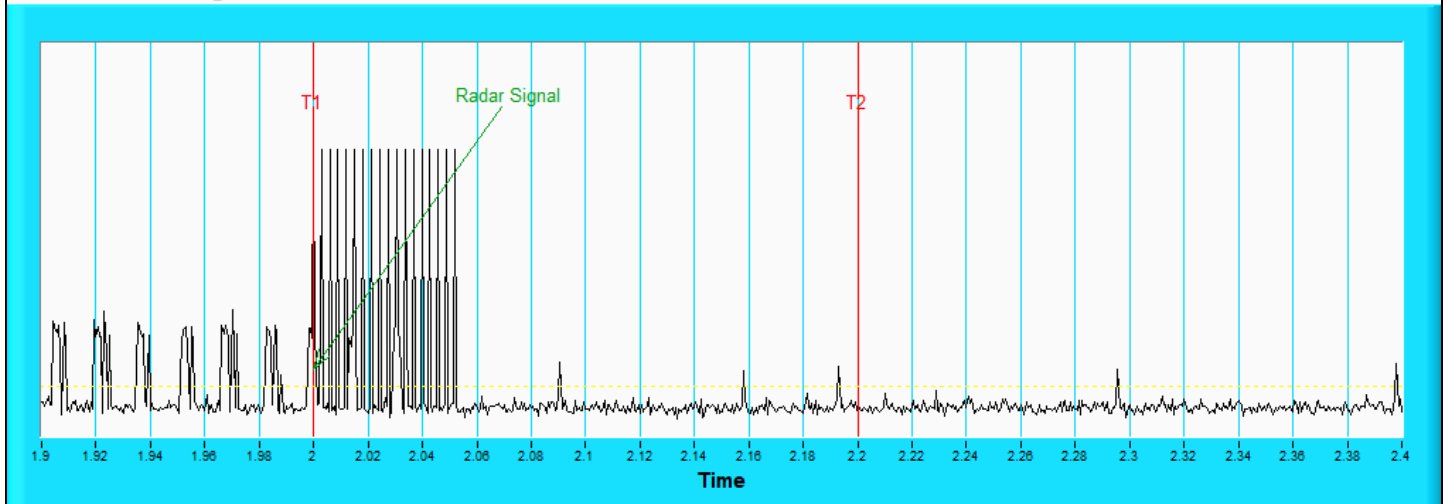

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 2

Channel Closing Transmission Time & Channel Move Time

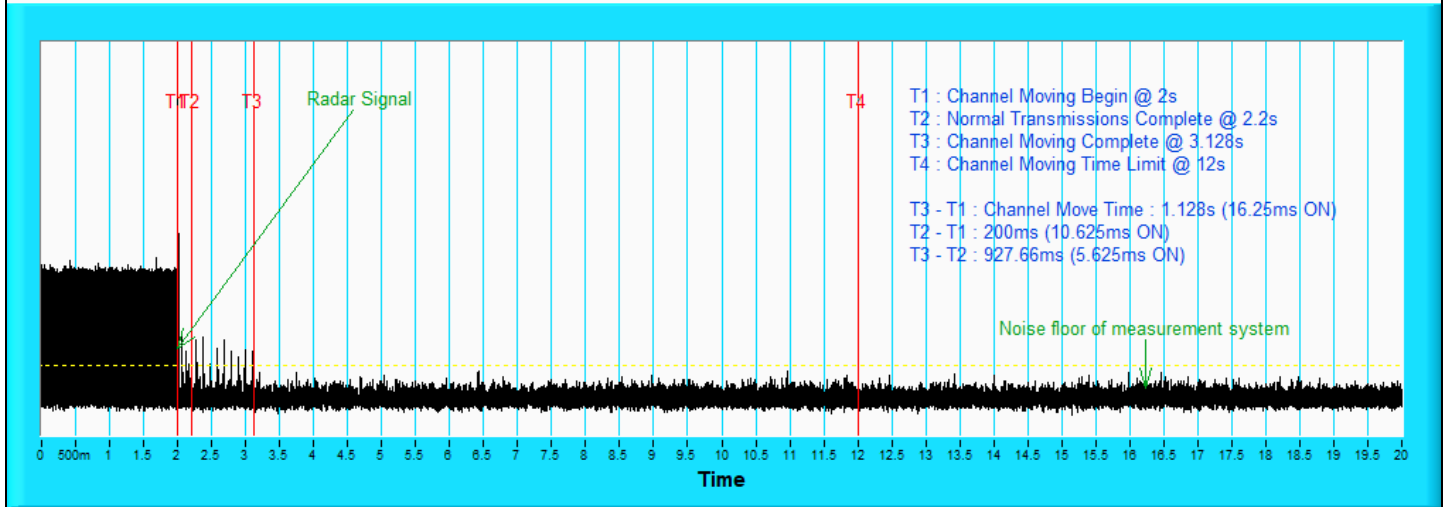

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

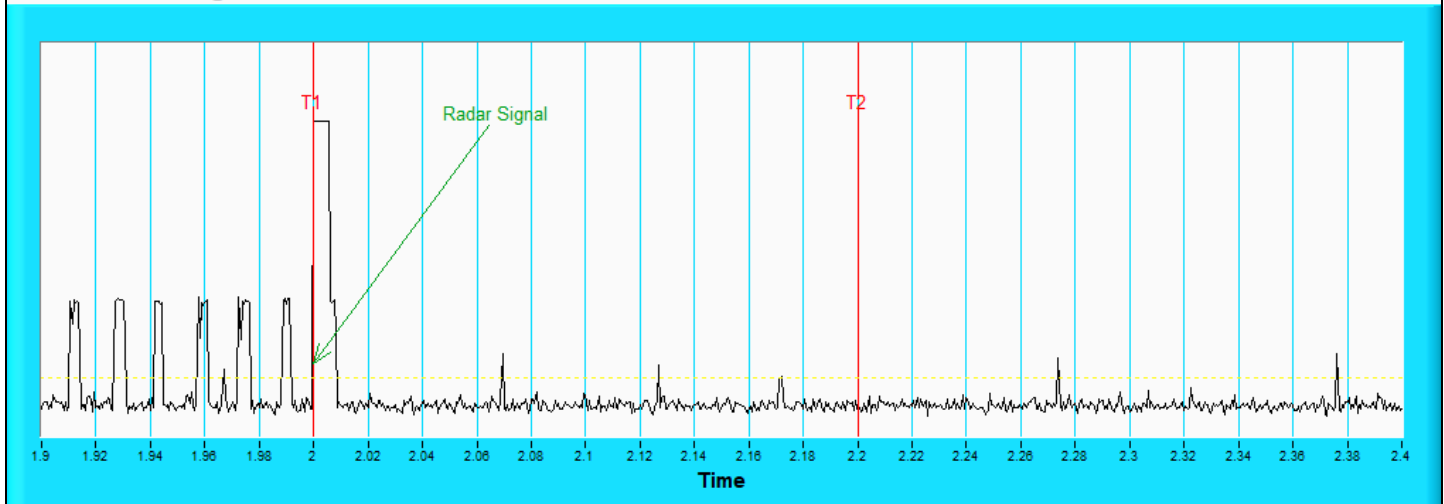

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 4

Channel Closing Transmission Time & Channel Move Time

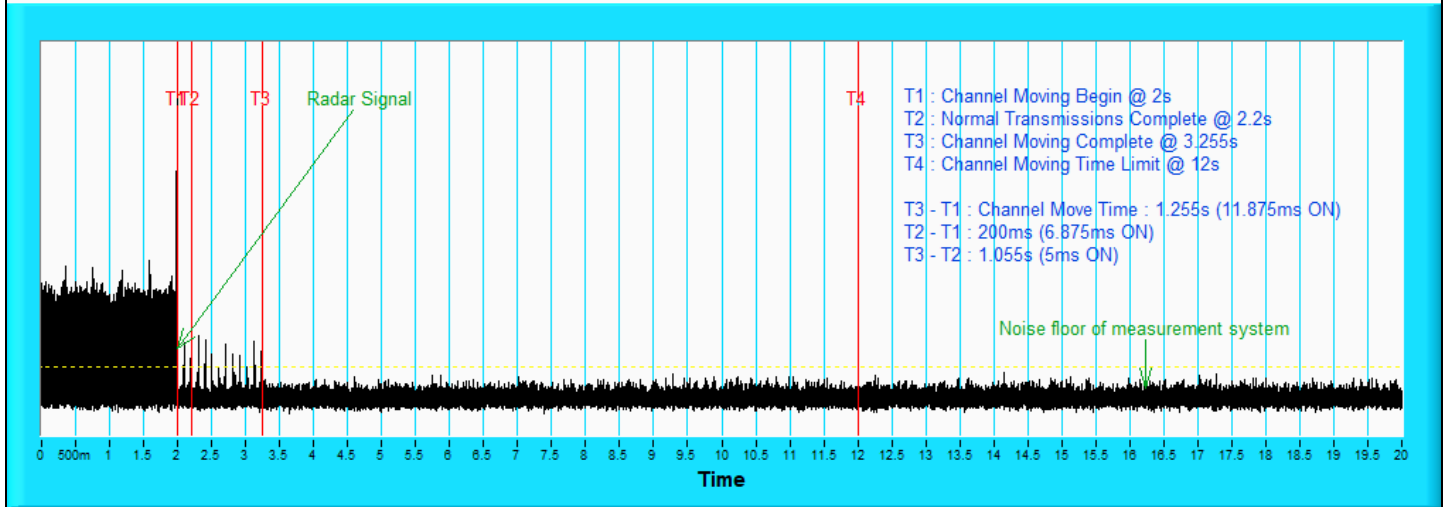

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Channel Closing Transmission Time & Channel Move Time

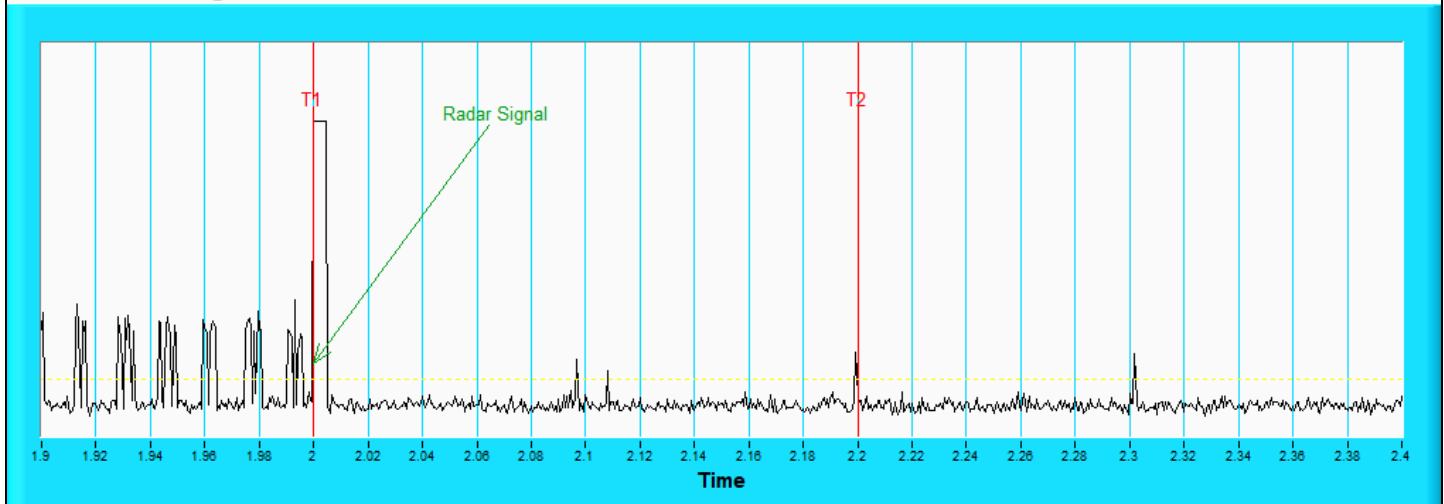


Note: Zoom in of the first 500 ms after radar signal applied.

7.4 Non-Occupancy Period


Environmental Conditions:	24°C, 62% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------

For Associated Test

1) Test results demonstrating an associated client link is established with the master on a test frequency.

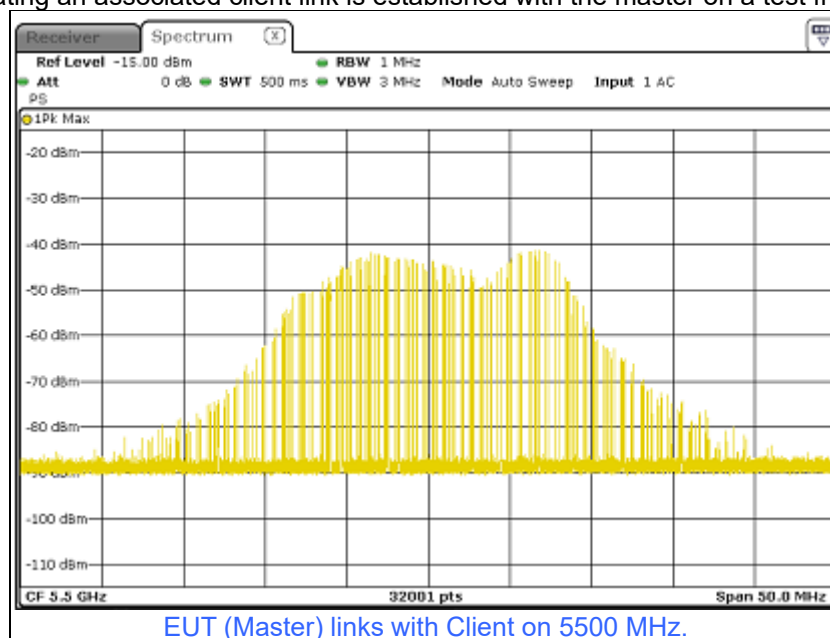


2) The Master and DFS-certified client device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

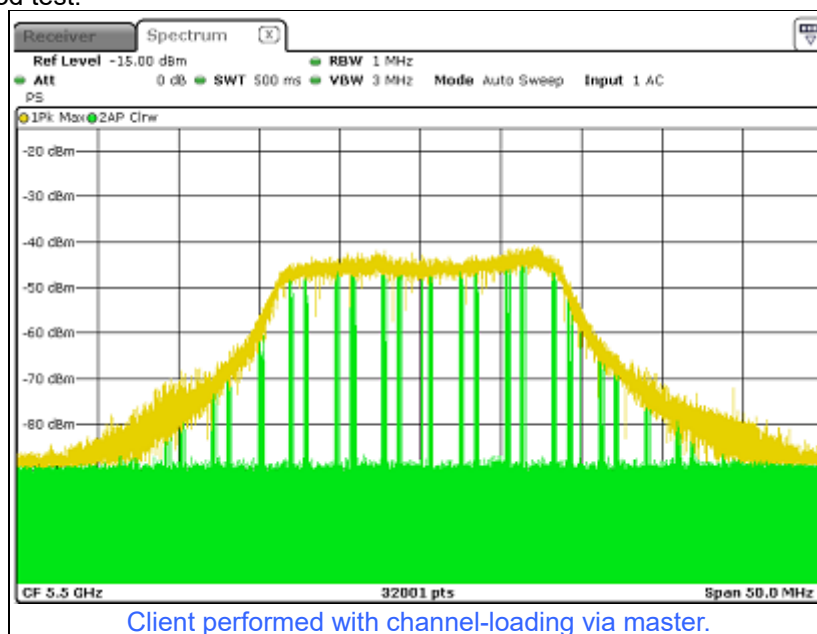

3). The device transmits one type of radar as specified in the DFS Order.

	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 0	1.0	1428.0	18	25704.0
Download	1	Type 0	1.0	1428.0	18	25704.0
Download	2	Type 0	1.0	1428.0	18	25704.0
Download	3	Type 0	1.0	1428.0	18	25704.0
Download	4	Type 0	1.0	1428.0	18	25704.0
Download	5	Type 0	1.0	1428.0	18	25704.0
Download	6	Type 0	1.0	1428.0	18	25704.0
Download	7	Type 0	1.0	1428.0	18	25704.0
Download	8	Type 0	1.0	1428.0	18	25704.0
Download	9	Type 0	1.0	1428.0	18	25704.0
Download	10	Type 0	1.0	1428.0	18	25704.0
Download	11	Type 0	1.0	1428.0	18	25704.0
Download	12	Type 0	1.0	1428.0	18	25704.0
Download	13	Type 0	1.0	1428.0	18	25704.0
Download	14	Type 0	1.0	1428.0	18	25704.0
Download	15	Type 0	1.0	1428.0	18	25704.0
Download	16	Type 0	1.0	1428.0	18	25704.0


DFS Test Tool

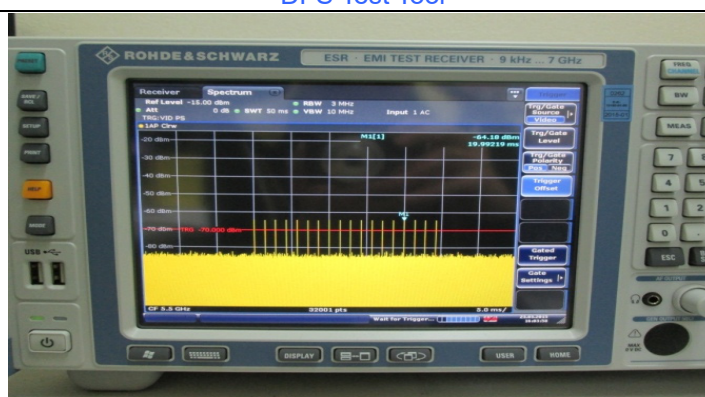

Radar 0 is used to test during DFS test

- 4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
 Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
 5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

Non - Occupancy Period

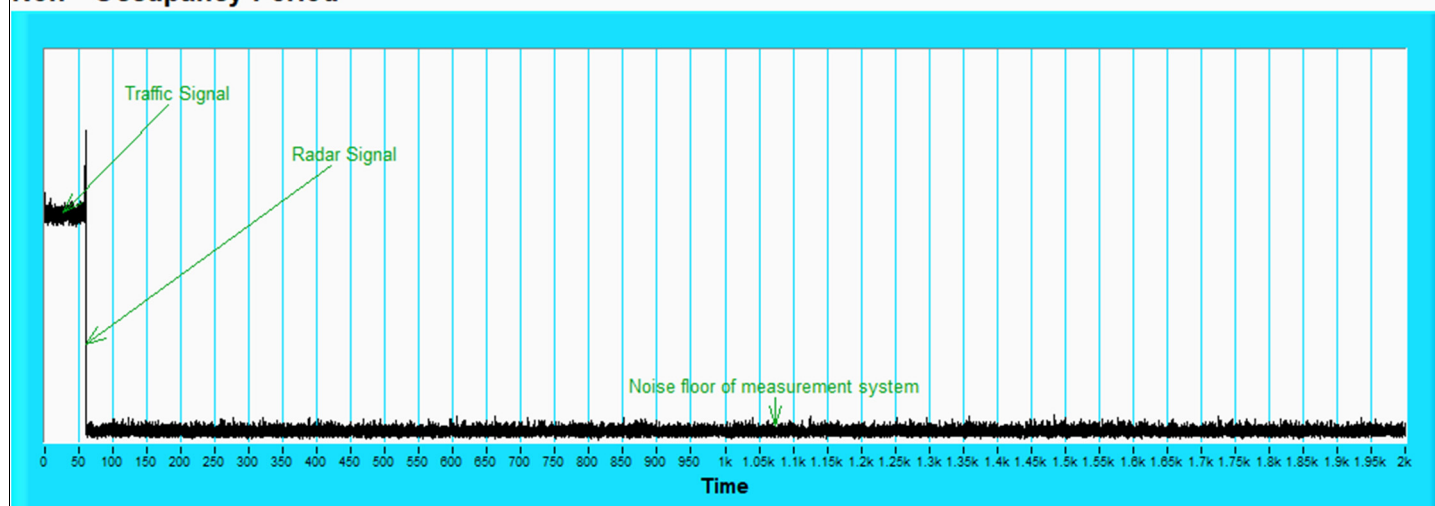

7.5 Statistical Performance Check

Environmental Conditions:	24°C, 62% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------

Radar Type	Number of Trials (Times)	Percentage of Successful Detection					Minimum Percentage of Successful Detection	Test Result
		802.11be (EHT20)	802.11be (EHT40)	802.11be (EHT80)	802.11be (EHT160) CH50	802.11be (EHT160) CH114		
1	30	96.7%	93.3%	100.0%	100.0%	96.7%	60%	Pass
2	30	100.0%	96.7%	100.0%	100.0%	96.7%	60%	Pass
3	30	93.3%	83.3%	90.0%	93.3%	83.3%	60%	Pass
4	30	90.0%	96.7%	73.3%	96.7%	80.0%	60%	Pass
Aggregate (Radar Types 1 - 4)		95.0%	92.5%	90.8%	97.5%	89.2%	80%	Pass
5	30	100.0%	100.0%	100.0%	96.7%	96.7%	80%	Pass
6	30	100.0%	100.0%	100.0%	100.0%	100.0%	70%	Pass

802.11be (EHT20) 5500MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5501	22	1066.1	57	938	Yes
2	5507	10	1432.7	76	698	Yes
3	5503	6	1618.1	86	618	Yes
4	5493	2	1858.7	99	538	Yes
5	5502	19	1139	61	878	Yes
6	5495	23	326.2	18	3066	Yes
7	5510	7	1567.4	83	638	Yes
8	5505	21	1089.3	58	918	Yes
9	5498	17	1193.3	63	838	Yes
10	5504	18	1165.5	62	858	Yes
11	5496	15	1253.1	67	798	Yes
12	5491	11	1392.8	74	718	No
13	5509	4	1730.1	92	578	Yes
14	5499	5	1672.2	89	598	Yes
15	5497	3	1792.1	95	558	Yes
16	5494	-	394.3	21	2536	Yes
17	5506	-	1035.2	55	966	Yes
18	5500	-	1209.2	64	827	Yes
19	5508	-	399.8	22	2501	Yes
20	5490	-	385.4	21	2595	Yes
21	5492	-	897.7	48	1114	Yes
22	5502	-	768	41	1302	Yes
23	5491	-	328.4	18	3045	Yes
24	5492	-	615.8	33	1624	Yes
25	5493	-	347.5	19	2878	Yes
26	5507	-	973.7	52	1027	Yes
27	5496	-	402.4	22	2485	Yes
28	5495	-	625	33	1600	Yes
29	5490	-	853.2	46	1172	Yes
30	5503	-	849.6	45	1177	Yes
						Detection Rate: 96.7%

802.11be (EHT20) 5500MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5507	26	3.2	179	Yes
2	5509	23	1.1	207	Yes
3	5492	24	2.1	230	Yes
4	5494	29	4.8	200	Yes
5	5508	28	3.9	214	Yes
6	5505	26	2.9	222	Yes
7	5500	26	3.2	204	Yes
8	5491	25	2.5	192	Yes
9	5498	26	3.1	164	Yes
10	5497	23	1.2	156	Yes
11	5501	27	3.9	210	Yes
12	5502	29	4.6	201	Yes
13	5496	26	3.2	162	Yes
14	5499	25	2.2	197	Yes
15	5504	29	4.5	163	Yes
16	5510	26	3	203	Yes
17	5506	29	5	168	Yes
18	5490	25	2.4	217	Yes
19	5503	26	2.9	191	Yes
20	5495	25	2.3	166	Yes
21	5493	27	3.7	150	Yes
22	5504	25	2.2	176	Yes
23	5502	29	4.9	195	Yes
24	5509	26	2.9	202	Yes
25	5494	25	2.5	178	Yes
26	5493	23	1.1	206	Yes
27	5497	27	3.8	155	Yes
28	5498	29	4.7	157	Yes
29	5501	25	2.4	224	Yes
30	5503	28	4.2	159	Yes
					Detection Rate: 100%

802.11be (EHT20) 5500MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5501	17	8.2	355	Yes
2	5505	16	6.1	487	Yes
3	5495	16	7.1	344	Yes
4	5500	18	9.8	288	Yes
5	5509	18	8.9	230	Yes
6	5499	17	7.9	432	Yes
7	5506	17	8.2	207	Yes
8	5496	17	7.5	443	Yes
9	5491	17	8.1	439	Yes
10	5497	16	6.2	223	Yes
11	5493	18	8.9	208	No
12	5492	18	9.6	463	Yes
13	5502	17	8.2	441	Yes
14	5503	16	7.2	323	Yes
15	5490	18	9.5	297	Yes
16	5498	17	8	412	Yes
17	5510	18	10	324	Yes
18	5507	17	7.4	271	Yes
19	5508	17	7.9	349	Yes
20	5494	16	7.3	409	Yes
21	5504	18	8.7	373	Yes
22	5491	16	7.2	254	No
23	5497	18	9.9	274	Yes
24	5502	17	7.9	278	Yes
25	5501	17	7.5	317	Yes
26	5509	16	6.1	260	Yes
27	5494	18	8.8	211	Yes
28	5506	18	9.7	272	Yes
29	5499	17	7.4	264	Yes
30	5504	18	9.2	284	Yes
					Detection Rate: 93.3%

802.11be (EHT20) 5500MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5505	14	16	355	Yes
2	5502	12	11.3	487	Yes
3	5491	13	13.5	344	No
4	5496	16	19.4	288	Yes
5	5493	15	17.5	230	Yes
6	5498	14	15.3	432	Yes
7	5499	14	15.9	207	Yes
8	5497	13	14.3	443	Yes
9	5495	14	15.8	439	Yes
10	5490	12	11.5	223	Yes
11	5504	15	17.4	208	Yes
12	5508	16	19	463	Yes
13	5506	14	16	441	Yes
14	5494	13	13.8	323	Yes
15	5510	16	18.9	297	Yes
16	5500	14	15.5	412	No
17	5507	16	19.9	324	Yes
18	5492	13	14.1	271	No
19	5501	14	15.2	349	Yes
20	5503	13	13.8	409	Yes
21	5509	15	17.1	373	Yes
22	5507	13	13.8	254	Yes
23	5496	16	19.8	274	Yes
24	5498	14	15.3	278	Yes
25	5505	13	14.5	317	Yes
26	5499	12	11.3	260	Yes
27	5508	15	17.3	211	Yes
28	5491	16	19.2	272	Yes
29	5497	13	14.2	264	Yes
30	5495	15	18.2	284	Yes
					Detection Rate: 90%

802.11be (EHT20) 5500MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5500	LP_SIGNAL_01	Yes
2	5	5500	LP_SIGNAL_02	Yes
3	9	5500	LP_SIGNAL_03	Yes
4	19	5500	LP_SIGNAL_04	Yes
5	16	5500	LP_SIGNAL_05	Yes
6	12	5500	LP_SIGNAL_06	Yes
7	13	5500	LP_SIGNAL_07	Yes
8	10	5500	LP_SIGNAL_08	Yes
9	13	5500	LP_SIGNAL_09	Yes
10	6	5500	LP_SIGNAL_10	Yes
11	16	5497.03	LP_SIGNAL_11	Yes
12	19	5498.23	LP_SIGNAL_12	Yes
13	13	5495.83	LP_SIGNAL_13	Yes
14	10	5494.63	LP_SIGNAL_14	Yes
15	18	5497.83	LP_SIGNAL_15	Yes
16	12	5495.43	LP_SIGNAL_16	Yes
17	20	5498.63	LP_SIGNAL_17	Yes
18	10	5494.63	LP_SIGNAL_18	Yes
19	12	5495.43	LP_SIGNAL_19	Yes
20	10	5494.63	LP_SIGNAL_20	Yes
21	15	5503.37	LP_SIGNAL_21	Yes
22	9	5505.77	LP_SIGNAL_22	Yes
23	20	5501.37	LP_SIGNAL_23	Yes
24	12	5504.57	LP_SIGNAL_24	Yes
25	11	5504.97	LP_SIGNAL_25	Yes
26	5	5507.37	LP_SIGNAL_26	Yes
27	16	5502.97	LP_SIGNAL_27	Yes
28	19	5501.77	LP_SIGNAL_28	Yes
29	10	5505.37	LP_SIGNAL_29	Yes
30	17	5502.57	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT20) 5500MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT40) 5510MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5491	23	326.2	18	3066	No
2	5516	9	1474.9	78	678	Yes
3	5510	16	1222.5	65	818	Yes
4	5497	5	1672.2	89	598	Yes
5	5517	7	1567.4	83	638	Yes
6	5524	15	1253.1	67	798	Yes
7	5501	12	1355	72	738	Yes
8	5493	20	1113.6	59	898	Yes
9	5495	11	1392.8	74	718	No
10	5499	3	1792.1	95	558	Yes
11	5520	19	1139	61	878	Yes
12	5529	17	1193.3	63	838	Yes
13	5512	2	1858.7	99	538	Yes
14	5519	8	1519.8	81	658	Yes
15	5522	22	1066.1	57	938	Yes
16	5521	-	1065	57	939	Yes
17	5513	-	499	27	2004	Yes
18	5506	-	627.7	34	1593	Yes
19	5502	-	636.5	34	1571	Yes
20	5528	-	1179.2	63	848	Yes
21	5505	-	370.8	20	2697	Yes
22	5492	-	590.7	32	1693	Yes
23	5527	-	557.7	30	1793	Yes
24	5496	-	989.1	53	1011	Yes
25	5494	-	349.4	19	2862	Yes
26	5503	-	997	53	1003	Yes
27	5518	-	363.5	20	2751	Yes
28	5509	-	492.9	27	2029	Yes
29	5498	-	1326.3	70	754	Yes
30	5511	-	803.2	43	1245	Yes
						Detection Rate: 93.3%

802.11be (EHT40) 5510MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5503	29	4.9	210	Yes
2	5491	24	1.7	178	Yes
3	5528	25	2.1	173	Yes
4	5527	28	4	222	Yes
5	5496	27	3.6	219	Yes
6	5495	29	5	212	Yes
7	5509	29	4.9	176	Yes
8	5497	23	1.1	199	Yes
9	5516	23	1.2	162	Yes
10	5499	29	4.5	220	Yes
11	5500	29	5	229	Yes
12	5493	29	5	214	Yes
13	5521	25	2.4	153	Yes
14	5524	28	4.1	197	Yes
15	5530	24	2	211	Yes
16	5514	29	4.6	190	Yes
17	5502	23	1	213	Yes
18	5515	25	2.4	218	Yes
19	5504	26	3.2	215	Yes
20	5512	26	3.1	157	Yes
21	5511	25	2.7	168	Yes
22	5498	25	2.6	227	Yes
23	5518	24	2	171	No
24	5510	23	1.1	158	Yes
25	5519	23	1	167	Yes
26	5522	29	4.9	150	Yes
27	5525	29	4.8	191	Yes
28	5517	25	2.3	159	Yes
29	5508	28	4.3	226	Yes
30	5494	26	3.3	208	Yes
					Detection Rate: 96.7%

802.11be (EHT40) 5510MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5529	18	9.9	235	Yes
2	5520	16	6.7	357	No
3	5523	16	7.1	333	No
4	5496	18	9	242	Yes
5	5497	17	8.6	397	Yes
6	5530	18	10	302	Yes
7	5495	18	9.9	203	No
8	5516	16	6.1	428	Yes
9	5491	16	6.2	335	Yes
10	5517	18	9.5	240	Yes
11	5500	18	10	224	Yes
12	5509	18	10	410	Yes
13	5504	17	7.4	359	Yes
14	5492	18	9.1	269	Yes
15	5502	16	7	250	No
16	5499	18	9.6	247	Yes
17	5514	16	6	222	No
18	5507	17	7.4	424	Yes
19	5494	17	8.2	393	Yes
20	5518	17	8.1	382	Yes
21	5513	17	7.7	486	Yes
22	5512	17	7.6	480	Yes
23	5510	16	7	360	Yes
24	5524	16	6.1	297	Yes
25	5525	16	6	265	Yes
26	5501	18	9.9	263	Yes
27	5515	18	9.8	324	Yes
28	5490	17	7.3	386	Yes
29	5498	18	9.3	311	Yes
30	5508	17	8.3	378	Yes
					Detection Rate: 83.3%

802.11be (EHT40) 5510MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5509	16	19.7	235	Yes
2	5519	12	12.7	357	Yes
3	5496	13	13.6	333	Yes
4	5522	15	17.7	242	Yes
5	5492	15	16.8	397	Yes
6	5491	16	20	302	Yes
7	5513	16	19.7	203	Yes
8	5497	12	11.3	428	Yes
9	5512	12	11.5	335	Yes
10	5515	16	18.8	240	Yes
11	5500	16	20	224	No
12	5501	16	20	410	Yes
13	5502	13	14.2	359	Yes
14	5517	15	18	269	Yes
15	5527	13	13.3	250	Yes
16	5529	16	19	247	Yes
17	5530	12	11.1	222	Yes
18	5511	13	14.2	424	Yes
19	5499	14	15.9	393	Yes
20	5503	14	15.8	382	Yes
21	5494	14	14.8	486	Yes
22	5508	13	14.6	480	Yes
23	5523	13	13.2	360	Yes
24	5490	12	11.3	297	Yes
25	5514	12	11	265	Yes
26	5520	16	19.6	263	Yes
27	5516	16	19.6	324	Yes
28	5507	13	14	386	Yes
29	5493	16	18.3	311	Yes
30	5498	14	16.1	378	Yes
					Detection Rate: 96.7%

802.11be (EHT40) 5510MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5510	LP_SIGNAL_01	Yes
2	5	5510	LP_SIGNAL_02	Yes
3	9	5510	LP_SIGNAL_03	Yes
4	19	5510	LP_SIGNAL_04	Yes
5	16	5510	LP_SIGNAL_05	Yes
6	12	5510	LP_SIGNAL_06	Yes
7	13	5510	LP_SIGNAL_07	Yes
8	10	5510	LP_SIGNAL_08	Yes
9	13	5510	LP_SIGNAL_09	Yes
10	6	5510	LP_SIGNAL_10	Yes
11	16	5497.56	LP_SIGNAL_11	Yes
12	19	5498.76	LP_SIGNAL_12	Yes
13	13	5496.36	LP_SIGNAL_13	Yes
14	10	5495.16	LP_SIGNAL_14	Yes
15	18	5498.36	LP_SIGNAL_15	Yes
16	12	5495.96	LP_SIGNAL_16	Yes
17	20	5499.16	LP_SIGNAL_17	Yes
18	10	5495.16	LP_SIGNAL_18	Yes
19	12	5495.96	LP_SIGNAL_19	Yes
20	10	5495.16	LP_SIGNAL_20	Yes
21	15	5522.65	LP_SIGNAL_21	Yes
22	9	5525.05	LP_SIGNAL_22	Yes
23	20	5520.65	LP_SIGNAL_23	Yes
24	12	5523.85	LP_SIGNAL_24	Yes
25	11	5524.25	LP_SIGNAL_25	Yes
26	5	5526.65	LP_SIGNAL_26	Yes
27	16	5522.25	LP_SIGNAL_27	Yes
28	19	5521.05	LP_SIGNAL_28	Yes
29	10	5524.65	LP_SIGNAL_29	Yes
30	17	5521.85	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT40) 5510MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT80) 5530MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5511	18	1165.5	62	858	Yes
2	5543	20	1113.6	59	898	Yes
3	5525	8	1519.8	81	658	Yes
4	5564	19	1139	61	878	Yes
5	5493	6	1618.1	86	618	Yes
6	5569	12	1355	72	738	Yes
7	5537	5	1672.2	89	598	Yes
8	5563	7	1567.4	83	638	Yes
9	5494	22	1066.1	57	938	Yes
10	5492	2	1858.7	99	538	Yes
11	5517	9	1474.9	78	678	Yes
12	5490	14	1285.3	68	778	Yes
13	5565	21	1089.3	58	918	Yes
14	5553	10	1432.7	76	698	Yes
15	5515	3	1792.1	95	558	Yes
16	5498	-	327.8	18	3051	Yes
17	5502	-	425.4	23	2351	Yes
18	5514	-	1085.8	58	921	Yes
19	5535	-	643.1	34	1555	Yes
20	5536	-	386.1	21	2590	Yes
21	5547	-	635.7	34	1573	Yes
22	5523	-	1733.1	92	577	Yes
23	5497	-	479.2	26	2087	Yes
24	5507	-	1003	53	997	Yes
25	5501	-	424.1	23	2358	Yes
26	5508	-	638.6	34	1566	Yes
27	5516	-	412.5	22	2424	Yes
28	5529	-	501.5	27	1994	Yes
29	5530	-	520	28	1923	Yes
30	5519	-	1412.4	75	708	Yes
						Detection Rate: 100%

802.11be (EHT80) 5530MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5500	23	1.3	228	Yes
2	5503	26	3.2	172	Yes
3	5499	27	3.9	212	Yes
4	5530	24	1.9	213	Yes
5	5528	27	3.6	150	Yes
6	5559	26	3.3	158	Yes
7	5507	29	4.9	210	Yes
8	5495	23	1.3	223	Yes
9	5509	29	4.9	152	Yes
10	5493	27	3.3	190	Yes
11	5494	25	2.7	203	Yes
12	5501	29	5	227	Yes
13	5514	26	3.3	196	Yes
14	5523	28	4.4	198	Yes
15	5554	24	1.9	161	Yes
16	5553	27	3.6	226	Yes
17	5560	26	2.8	181	Yes
18	5570	25	2.5	167	Yes
19	5526	23	1.3	178	Yes
20	5539	25	2.4	187	Yes
21	5524	29	4.8	153	Yes
22	5511	27	3.5	201	Yes
23	5508	23	1.3	166	Yes
24	5513	29	4.8	155	Yes
25	5492	28	4.3	221	Yes
26	5534	26	3.2	191	Yes
27	5516	24	1.7	192	Yes
28	5515	23	1.2	164	Yes
29	5545	25	2.4	154	Yes
30	5521	29	5	207	Yes
					Detection Rate: 100%

802.11be (EHT80) 5530MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5541	16	6.3	403	No
2	5528	17	8.2	313	Yes
3	5513	18	8.9	214	Yes
4	5547	16	6.9	262	Yes
5	5564	17	8.6	273	Yes
6	5569	17	8.3	470	Yes
7	5493	18	9.9	453	Yes
8	5497	16	6.3	378	Yes
9	5520	18	9.9	483	Yes
10	5558	17	8.3	317	Yes
11	5553	17	7.7	385	Yes
12	5542	18	10	275	No
13	5510	17	8.3	497	Yes
14	5562	18	9.4	420	Yes
15	5543	16	6.9	366	Yes
16	5500	17	8.6	414	Yes
17	5561	17	7.8	444	Yes
18	5548	17	7.5	427	Yes
19	5563	16	6.3	338	Yes
20	5496	17	7.4	436	Yes
21	5552	18	9.8	265	Yes
22	5519	17	8.5	451	Yes
23	5512	16	6.3	274	Yes
24	5551	18	9.8	417	Yes
25	5506	18	9.3	330	Yes
26	5495	17	8.2	472	Yes
27	5534	16	6.7	333	Yes
28	5517	16	6.2	377	Yes
29	5518	17	7.4	394	Yes
30	5505	18	10	296	No
					Detection Rate: 90%

802.11be (EHT80) 5530MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5535	12	11.7	403	Yes
2	5518	14	15.9	313	Yes
3	5555	15	17.4	214	Yes
4	5533	13	13.2	262	Yes
5	5497	15	16.8	273	Yes
6	5559	14	16.1	470	No
7	5496	16	19.8	453	Yes
8	5557	12	11.7	378	No
9	5562	16	19.8	483	No
10	5529	14	16.2	317	Yes
11	5564	14	14.8	385	No
12	5501	16	19.9	275	Yes
13	5569	14	16.1	497	No
14	5503	16	18.6	420	Yes
15	5493	13	13.2	366	Yes
16	5517	15	16.9	414	Yes
17	5556	14	15	444	No
18	5510	13	14.4	427	Yes
19	5508	12	11.7	338	Yes
20	5538	13	14.2	436	Yes
21	5523	16	19.6	265	Yes
22	5547	15	16.5	451	Yes
23	5553	12	11.7	274	Yes
24	5542	16	19.4	417	Yes
25	5514	16	18.3	330	Yes
26	5511	14	15.9	472	Yes
27	5521	12	12.5	333	No
28	5546	12	11.5	377	No
29	5534	13	14.2	394	Yes
30	5519	16	19.8	296	Yes
					Detection Rate: 73.3%

802.11be (EHT80) 5530MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	11	5530	LP_SIGNAL_01	Yes
2	12	5530	LP_SIGNAL_02	Yes
3	5	5530	LP_SIGNAL_03	Yes
4	12	5530	LP_SIGNAL_04	Yes
5	9	5530	LP_SIGNAL_05	Yes
6	11	5530	LP_SIGNAL_06	Yes
7	20	5530	LP_SIGNAL_07	Yes
8	20	5530	LP_SIGNAL_08	Yes
9	6	5530	LP_SIGNAL_09	Yes
10	14	5530	LP_SIGNAL_10	Yes
11	19	5498.99	LP_SIGNAL_11	Yes
12	12	5496.19	LP_SIGNAL_12	Yes
13	18	5498.59	LP_SIGNAL_13	Yes
14	7	5494.19	LP_SIGNAL_14	Yes
15	9	5494.99	LP_SIGNAL_15	Yes
16	15	5497.39	LP_SIGNAL_16	Yes
17	15	5497.39	LP_SIGNAL_17	Yes
18	14	5496.99	LP_SIGNAL_18	Yes
19	19	5498.99	LP_SIGNAL_19	Yes
20	17	5498.19	LP_SIGNAL_20	Yes
21	5	5566.62	LP_SIGNAL_21	Yes
22	5	5566.62	LP_SIGNAL_22	Yes
23	13	5563.42	LP_SIGNAL_23	Yes
24	7	5565.82	LP_SIGNAL_24	Yes
25	14	5563.02	LP_SIGNAL_25	Yes
26	10	5564.62	LP_SIGNAL_26	Yes
27	15	5562.62	LP_SIGNAL_27	Yes
28	9	5565.02	LP_SIGNAL_28	Yes
29	5	5566.62	LP_SIGNAL_29	Yes
30	10	5564.62	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT80) 5530MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5313	18	1165.5	62	858	Yes
2	5253	20	1113.6	59	898	Yes
3	5272	8	1519.8	81	658	Yes
4	5299	19	1139	61	878	Yes
5	5295	6	1618.1	86	618	Yes
6	5304	12	1355	72	738	Yes
7	5318	5	1672.2	89	598	Yes
8	5288	7	1567.4	83	638	Yes
9	5267	22	1066.1	57	938	Yes
10	5278	2	1858.7	99	538	Yes
11	5303	9	1474.9	78	678	Yes
12	5298	14	1285.3	68	778	Yes
13	5284	21	1089.3	58	918	Yes
14	5279	10	1432.7	76	698	Yes
15	5264	3	1792.1	95	558	Yes
16	5281	-	327.8	18	3051	Yes
17	5316	-	425.4	23	2351	Yes
18	5323	-	1085.8	58	921	Yes
19	5274	-	643.1	34	1555	Yes
20	5319	-	386.1	21	2590	Yes
21	5282	-	635.7	34	1573	Yes
22	5280	-	1733.1	92	577	Yes
23	5292	-	479.2	26	2087	Yes
24	5327	-	1003	53	997	Yes
25	5259	-	424.1	23	2358	Yes
26	5330	-	638.6	34	1566	Yes
27	5276	-	412.5	22	2424	Yes
28	5263	-	501.5	27	1994	Yes
29	5265	-	520	28	1923	Yes
30	5320	-	1412.4	75	708	Yes
						Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5257	23	1.3	228	Yes
2	5317	26	3.2	172	Yes
3	5252	27	3.9	212	Yes
4	5291	24	1.9	213	Yes
5	5322	27	3.6	150	Yes
6	5255	26	3.3	158	Yes
7	5267	29	4.9	210	Yes
8	5263	23	1.3	223	Yes
9	5258	29	4.9	152	Yes
10	5278	27	3.3	190	Yes
11	5329	25	2.7	203	Yes
12	5281	29	5	227	Yes
13	5262	26	3.3	196	Yes
14	5309	28	4.4	198	Yes
15	5251	24	1.9	161	Yes
16	5327	27	3.6	226	Yes
17	5324	26	2.8	181	Yes
18	5314	25	2.5	167	Yes
19	5268	23	1.3	178	Yes
20	5301	25	2.4	187	Yes
21	5270	29	4.8	153	Yes
22	5292	27	3.5	201	Yes
23	5272	23	1.3	166	Yes
24	5280	29	4.8	155	Yes
25	5293	28	4.3	221	Yes
26	5295	26	3.2	191	Yes
27	5298	24	1.7	192	Yes
28	5320	23	1.2	164	Yes
29	5299	25	2.4	154	Yes
30	5311	29	5	207	Yes
					Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5293	16	6.3	403	Yes
2	5285	17	8.2	313	Yes
3	5265	18	8.9	214	Yes
4	5269	16	6.9	262	Yes
5	5254	17	8.6	273	Yes
6	5322	17	8.3	470	Yes
7	5256	18	9.9	453	Yes
8	5321	16	6.3	378	Yes
9	5266	18	9.9	483	Yes
10	5289	17	8.3	317	Yes
11	5260	17	7.7	385	Yes
12	5258	18	10	275	Yes
13	5306	17	8.3	497	Yes
14	5286	18	9.4	420	Yes
15	5264	16	6.9	366	Yes
16	5277	17	8.6	414	Yes
17	5280	17	7.8	444	Yes
18	5305	17	7.5	427	Yes
19	5271	16	6.3	338	Yes
20	5290	17	7.4	436	Yes
21	5296	18	9.8	265	Yes
22	5251	17	8.5	451	No
23	5324	16	6.3	274	Yes
24	5308	18	9.8	417	Yes
25	5313	18	9.3	330	Yes
26	5320	17	8.2	472	Yes
27	5262	16	6.7	333	No
28	5323	16	6.2	377	Yes
29	5288	17	7.4	394	Yes
30	5261	18	10	296	Yes
					Detection Rate: 93.3%

802.11be (EHT160) 5250MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5260	12	11.7	403	Yes
2	5253	14	15.9	313	Yes
3	5329	15	17.4	214	Yes
4	5263	13	13.2	262	Yes
5	5306	15	16.8	273	No
6	5307	14	16.1	470	Yes
7	5270	16	19.8	453	Yes
8	5288	12	11.7	378	Yes
9	5299	16	19.8	483	Yes
10	5251	14	16.2	317	Yes
11	5324	14	14.8	385	Yes
12	5285	16	19.9	275	Yes
13	5301	14	16.1	497	Yes
14	5298	16	18.6	420	Yes
15	5283	13	13.2	366	Yes
16	5312	15	16.9	414	Yes
17	5325	14	15	444	Yes
18	5275	13	14.4	427	Yes
19	5250	12	11.7	338	Yes
20	5304	13	14.2	436	Yes
21	5266	16	19.6	265	Yes
22	5271	15	16.5	451	Yes
23	5281	12	11.7	274	Yes
24	5273	16	19.4	417	Yes
25	5274	16	18.3	330	Yes
26	5305	14	15.9	472	Yes
27	5276	12	12.5	333	Yes
28	5264	12	11.5	377	Yes
29	5278	13	14.2	394	Yes
30	5255	16	19.8	296	Yes
					Detection Rate: 96.7%

802.11be (EHT160) 5250MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5290	LP_SIGNAL_01	Yes
2	5	5290	LP_SIGNAL_02	Yes
3	9	5290	LP_SIGNAL_03	Yes
4	19	5290	LP_SIGNAL_04	Yes
5	16	5290	LP_SIGNAL_05	Yes
6	12	5290	LP_SIGNAL_06	Yes
7	13	5290	LP_SIGNAL_07	Yes
8	10	5290	LP_SIGNAL_08	Yes
9	13	5290	LP_SIGNAL_09	Yes
10	6	5290	LP_SIGNAL_10	Yes
11	16	5256.4	LP_SIGNAL_11	Yes
12	19	5257.6	LP_SIGNAL_12	Yes
13	13	5255.2	LP_SIGNAL_13	Yes
14	10	5254	LP_SIGNAL_14	Yes
15	18	5257.2	LP_SIGNAL_15	Yes
16	12	5254.8	LP_SIGNAL_16	Yes
17	20	5258	LP_SIGNAL_17	Yes
18	10	5254	LP_SIGNAL_18	No
19	12	5254.8	LP_SIGNAL_19	Yes
20	10	5254	LP_SIGNAL_20	Yes
21	15	5321.21	LP_SIGNAL_21	Yes
22	9	5323.61	LP_SIGNAL_22	Yes
23	20	5319.21	LP_SIGNAL_23	Yes
24	12	5322.41	LP_SIGNAL_24	Yes
25	11	5322.81	LP_SIGNAL_25	Yes
26	5	5325.21	LP_SIGNAL_26	Yes
27	16	5320.81	LP_SIGNAL_27	Yes
28	19	5319.61	LP_SIGNAL_28	Yes
29	10	5323.21	LP_SIGNAL_29	Yes
30	17	5320.41	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5250MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT160) 5570MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5544	22	1066.1	57	938	Yes
2	5635	1	1930.5	102	518	Yes
3	5557	2	1858.7	99	538	Yes
4	5568	21	1089.3	58	918	Yes
5	5601	15	1253.1	67	798	Yes
6	5623	18	1165.5	62	858	Yes
7	5523	9	1474.9	78	678	Yes
8	5625	16	1222.5	65	818	Yes
9	5627	11	1392.8	74	718	Yes
10	5516	8	1519.8	81	658	No
11	5549	6	1618.1	86	618	Yes
12	5649	19	1139	61	878	Yes
13	5526	17	1193.3	63	838	Yes
14	5577	23	326.2	18	3066	Yes
15	5567	7	1567.4	83	638	Yes
16	5509	-	596.3	32	1677	Yes
17	5618	-	404.5	22	2472	Yes
18	5515	-	610.1	33	1639	Yes
19	5616	-	498.5	27	2006	Yes
20	5519	-	761	41	1314	Yes
21	5510	-	390.8	21	2559	Yes
22	5631	-	925.9	49	1080	Yes
23	5587	-	986.2	53	1014	Yes
24	5592	-	373.3	20	2679	Yes
25	5646	-	914.9	49	1093	Yes
26	5539	-	784.3	42	1275	Yes
27	5533	-	770.4	41	1298	Yes
28	5502	-	349.5	19	2861	Yes
29	5501	-	397	21	2519	Yes
30	5628	-	963.4	51	1038	Yes
						Detection Rate: 96.7%

802.11be (EHT160) 5570MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5637	25	2.3	199	Yes
2	5521	24	1.7	229	Yes
3	5522	24	1.6	169	Yes
4	5636	28	4	218	Yes
5	5595	24	1.6	185	Yes
6	5494	28	4.3	196	Yes
7	5605	25	2.5	160	Yes
8	5591	27	3.5	167	Yes
9	5558	26	2.7	176	Yes
10	5617	27	3.8	209	Yes
11	5507	26	2.9	180	Yes
12	5501	28	4.3	157	Yes
13	5532	24	1.6	181	Yes
14	5644	29	4.7	162	Yes
15	5533	28	4.3	182	Yes
16	5634	23	1.2	215	No
17	5506	26	3	205	Yes
18	5614	24	2.1	197	Yes
19	5544	26	3.1	155	Yes
20	5543	24	2	220	Yes
21	5510	27	3.5	204	Yes
22	5567	24	2	200	Yes
23	5622	23	1	161	Yes
24	5630	24	1.9	230	Yes
25	5514	29	4.9	206	Yes
26	5492	26	3.1	210	Yes
27	5495	24	1.8	221	Yes
28	5635	29	4.5	227	Yes
29	5518	23	1	151	Yes
30	5561	23	1.3	216	Yes
					Detection Rate: 96.7%

802.11be (EHT160) 5570MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5540	16	7.3	378	Yes
2	5528	16	6.7	455	Yes
3	5492	16	6.6	473	Yes
4	5589	18	9	462	Yes
5	5591	16	6.6	436	Yes
6	5495	18	9.3	406	No
7	5529	17	7.5	213	No
8	5497	17	8.5	417	Yes
9	5506	17	7.7	317	Yes
10	5633	18	8.8	444	Yes
11	5548	17	7.9	223	Yes
12	5602	18	9.3	297	Yes
13	5564	16	6.6	495	Yes
14	5623	18	9.7	325	Yes
15	5642	18	9.3	221	No
16	5621	16	6.2	238	Yes
17	5498	17	8	247	Yes
18	5624	16	7.1	225	Yes
19	5501	17	8.1	361	Yes
20	5590	16	7	275	Yes
21	5510	17	8.5	306	Yes
22	5493	16	7	418	Yes
23	5636	16	6	327	Yes
24	5632	16	6.9	457	Yes
25	5547	18	9.9	328	No
26	5566	17	8.1	278	No
27	5614	16	6.8	366	Yes
28	5558	18	9.5	326	Yes
29	5518	16	6	380	Yes
30	5613	16	6.3	254	Yes
					Detection Rate: 83.3%

802.11be (EHT160) 5570MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5643	13	13.9	378	Yes
2	5632	12	12.7	455	Yes
3	5605	12	12.5	473	No
4	5541	15	17.7	462	Yes
5	5538	12	12.5	436	No
6	5530	16	18.3	406	Yes
7	5636	13	14.5	213	No
8	5566	15	16.5	417	No
9	5601	14	14.9	317	Yes
10	5617	15	17.2	444	Yes
11	5500	14	15.3	223	Yes
12	5572	16	18.3	297	Yes
13	5516	12	12.3	495	Yes
14	5503	16	19.3	325	Yes
15	5535	16	18.5	221	Yes
16	5623	12	11.5	238	Yes
17	5564	14	15.4	247	Yes
18	5507	13	13.4	225	Yes
19	5618	14	15.7	361	Yes
20	5645	13	13.2	275	No
21	5611	15	16.7	306	Yes
22	5603	13	13.4	418	Yes
23	5602	12	11	327	No
24	5628	13	13.1	457	Yes
25	5551	16	19.6	328	Yes
26	5517	14	15.8	278	Yes
27	5574	13	12.8	366	Yes
28	5613	16	18.8	326	Yes
29	5506	12	11	380	Yes
30	5552	12	11.7	254	Yes
					Detection Rate: 80%

802.11be (EHT160) 5570MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	10	5570	LP_SIGNAL_01	Yes
2	8	5570	LP_SIGNAL_02	Yes
3	7	5570	LP_SIGNAL_03	No
4	16	5570	LP_SIGNAL_04	Yes
5	7	5570	LP_SIGNAL_05	Yes
6	17	5570	LP_SIGNAL_06	Yes
7	11	5570	LP_SIGNAL_07	Yes
8	14	5570	LP_SIGNAL_08	Yes
9	12	5570	LP_SIGNAL_09	Yes
10	16	5570	LP_SIGNAL_10	Yes
11	12	5495.2	LP_SIGNAL_11	Yes
12	17	5497.2	LP_SIGNAL_12	Yes
13	7	5493.2	LP_SIGNAL_13	Yes
14	19	5498	LP_SIGNAL_14	Yes
15	18	5497.6	LP_SIGNAL_15	Yes
16	6	5492.8	LP_SIGNAL_16	Yes
17	12	5495.2	LP_SIGNAL_17	Yes
18	9	5494	LP_SIGNAL_18	Yes
19	13	5495.6	LP_SIGNAL_19	Yes
20	8	5493.6	LP_SIGNAL_20	Yes
21	15	5639.34	LP_SIGNAL_21	Yes
22	9	5641.74	LP_SIGNAL_22	Yes
23	5	5643.34	LP_SIGNAL_23	Yes
24	8	5642.14	LP_SIGNAL_24	Yes
25	20	5637.34	LP_SIGNAL_25	Yes
26	13	5640.14	LP_SIGNAL_26	Yes
27	8	5642.14	LP_SIGNAL_27	Yes
28	18	5638.14	LP_SIGNAL_28	Yes
29	5	5643.34	LP_SIGNAL_29	Yes
30	6	5642.94	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5570MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

8 Declaration of Conformity by the Manufacturer

8.1 Transmit Power Control (TPC)

U-NII devices operating in DFS Bands (5.25 to 5.35 GHz and 5.47 to 5.725 GHz) shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

8.2 Statement of Manufacturer

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

9 Pictures of Test Arrangements

Please refer to the attached file (DFS Test Setup Photo)

10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

11 Appendix

11.1 Radar Test Signal

The Long Pulse Radar Pattern

802.11be (EHT20) 5500MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 15						
Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_02						
Number of Bursts in Trial: 8						
Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_11

Number of Bursts in Trial: 17

Chirp Center Frequency: 5497.03MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5495.83MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5497.83MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.43MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.43MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5503.37MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5505.77MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5501.37MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5504.57MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5504.97MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5507.37MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5502.97MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5501.77MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5505.37MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 18
Chirp Center Frequency: 5502.57MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT40) 5510MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 14
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 8
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5497.56MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.76MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5496.36MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495.16MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.36MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.96MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5499.16MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495.16MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.96MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495.16MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5522.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5525.05MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5520.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5523.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5524.25MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5526.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5522.25MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5521.05MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5524.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5521.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT80) 5530MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	71.4	1802	1484	-
2	2	11	72.9	1618	1750	-
3	1	11	52.9	1654	-	-
4	2	11	74	1742	1659	-
5	1	11	63.4	1097	-	-
6	2	11	71.2	1072	1940	-
7	3	11	97	1824	1300	1658
8	3	11	97.9	1279	1115	1411
9	1	11	54.5	1974	-	-
10	2	11	79.6	1304	1378	-
11	3	11	96.2	1471	1233	1921
12	2	11	74.7	1177	1638	-
13	3	11	91	1668	1763	1077

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	57.6	1988	-	-
2	1	12	64.1	1013	-	-
3	2	12	82.6	1611	1070	-
4	2	12	82.3	1991	1683	-
5	2	12	78.8	1702	1478	-
6	3	12	96.1	1813	1847	1995
7	3	12	90	1749	1346	1133
8	1	12	50.6	1710	-	-
9	1	12	52.8	1195	-	-
10	2	12	75.6	1861	1244	-
11	1	12	58.8	1218	-	-
12	2	12	79.1	1544	1775	-
13	1	12	65.7	1186	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	83.6	1369	1139	1441
2	1	5	63.2	1909	-	-
3	1	5	51.6	1664	-	-
4	1	5	66.5	1883	-	-
5	2	5	75.5	1560	1335	-
6	3	5	91.2	1144	1617	1582
7	3	5	95.9	1111	1312	1329
8	1	5	60.7	1754	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	89.3	1564	1977	1832
2	1	12	57.6	1639	-	-
3	2	12	74.3	1600	1127	-
4	2	12	75.7	1631	1125	-
5	3	12	94.3	1353	1464	1984
6	1	12	53.3	1030	-	-
7	2	12	70.7	1677	1798	-
8	1	12	60.8	1836	-	-
9	1	12	63.4	1053	-	-
10	1	12	64.6	1899	-	-
11	2	12	82.6	1725	1082	-
12	3	12	86	1272	1821	1171
13	2	12	69.9	1833	1765	-
14	2	12	79.9	1102	1385	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	51.3	1017	-	-
2	2	9	70.5	1275	1651	-
3	2	9	72.8	1868	1107	-
4	3	9	88.8	1682	1496	1714
5	1	9	58	1389	-	-
6	1	9	66.1	1588	-	-
7	3	9	99.9	1242	1577	1063
8	2	9	68.6	1035	1311	-
9	3	9	97.3	1672	1578	1203
10	3	9	94.1	1660	1348	1783
11	3	9	94.9	1278	1058	1859

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97.8	1376	1735	1705
2	3	11	87.6	1264	1721	1020
3	3	11	83.7	1715	1246	1361
4	3	11	96.3	1078	1815	1116
5	3	11	88.1	1176	1997	1302
6	1	11	54.1	1375	-	-
7	1	11	54.9	1168	-	-
8	2	11	78.9	1467	1657	-
9	2	11	80.3	1148	1568	-
10	2	11	68.3	1963	1402	-
11	1	11	56.4	1848	-	-
12	1	11	58.2	1630	-	-
13	1	11	56.5	1105	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_07

Number of Bursts in Trial: 20

Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	84.6	1756	1857	1741
2	3	20	92.7	1470	1236	1262
3	2	20	69.2	1733	1200	-
4	3	20	89.8	1793	1703	1923
5	3	20	89.4	1880	1676	1486
6	1	20	61	1462	-	-
7	2	20	76.2	1280	1918	-
8	3	20	93.1	1299	1661	1110
9	3	20	95.8	1846	1011	1964
10	1	20	53.6	1810	-	-
11	1	20	61.9	1435	-	-
12	2	20	81.1	1744	1864	-
13	3	20	93.7	1875	1392	1212
14	3	20	86.8	1644	1622	1863
15	2	20	83.2	1445	1797	-
16	2	20	79.7	1764	1674	-
17	1	20	60.8	1500	-	-
18	2	20	70.7	1901	1033	-
19	1	20	60.4	1751	-	-
20	2	20	80.2	1626	1730	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_08

Number of Bursts in Trial: 20

Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	80.9	1545	1603	-
2	3	20	96.5	1189	1449	1225
3	1	20	65.8	1925	-	-
4	3	20	87	1018	1049	1841
5	1	20	64.6	1048	-	-
6	2	20	75.3	1429	1368	-
7	1	20	60.4	1156	-	-
8	2	20	77.7	1681	1307	-
9	1	20	57.1	1625	-	-
10	3	20	89.7	1355	1088	1374
11	1	20	61.6	1537	-	-
12	3	20	94.9	1989	1865	1947
13	1	20	62.2	1234	-	-
14	1	20	66.2	1931	-	-
15	1	20	54.2	1062	-	-
16	1	20	65.4	1014	-	-
17	3	20	96.9	1572	1489	1042
18	1	20	60	1576	-	-
19	2	20	79.2	1757	1993	-
20	3	20	86.2	1237	1607	1060

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_09

Number of Bursts in Trial: 9

Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	67.9	1522	1835	-
2	1	6	51.7	1472	-	-
3	1	6	51.9	1917	-	-
4	3	6	83.9	1130	1323	1518
5	2	6	71.8	1284	1515	-
6	1	6	65.1	1068	-	-
7	3	6	94.4	1173	1019	1934
8	2	6	67.4	1624	1866	-
9	2	6	71.8	1209	1288	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	14	99.2	1814	1640	1794
2	2	14	69.4	1316	1641	-
3	3	14	97.7	1675	1548	1344
4	3	14	96.1	1075	1407	1413
5	2	14	78.1	1728	1052	-
6	2	14	75.7	1492	1162	-
7	3	14	88.1	1205	1529	1508
8	2	14	76.9	1584	1558	-
9	2	14	82.3	1616	1438	-
10	2	14	75.2	1074	1680	-
11	1	14	64	1566	-	-
12	1	14	50.5	1085	-	-
13	3	14	98.6	1123	1090	1509
14	3	14	85.9	1719	1845	1949
15	1	14	56.1	1726	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.99MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	92.1	1098	1308	1459
2	2	19	67	1927	1877	-
3	2	19	68.8	1126	1468	-
4	2	19	77.5	1609	1286	-
5	2	19	82.5	1091	1083	-
6	2	19	67.8	1163	1523	-
7	2	19	82.9	1650	1843	-
8	1	19	50.8	1643	-	-
9	3	19	91.5	1405	1469	1739
10	2	19	74.2	1933	1366	-
11	1	19	62.3	1352	-	-
12	2	19	79.1	1944	1119	-
13	3	19	94.6	1034	1357	1554
14	2	19	81.9	1227	1839	-
15	1	19	65.2	1592	-	-
16	3	19	99.5	1418	1636	1533
17	2	19	80.9	1881	1786	-
18	3	19	93.1	1818	1998	1736
19	1	19	55.9	1936	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5496.19MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	58	1004	-	-
2	2	12	70.3	1393	1504	-
3	1	12	63.9	1586	-	-
4	3	12	98.9	1822	1727	1986
5	3	12	84.2	1623	1382	1419
6	3	12	90.6	1096	1745	1987
7	1	12	66.1	1669	-	-
8	3	12	88.5	1820	1811	1590
9	1	12	64.5	1834	-	-
10	3	12	84.8	1036	1466	1027
11	1	12	65.1	1536	-	-
12	3	12	85.6	1620	1347	1397
13	2	12	69.3	1951	1772	-
14	1	12	65.8	1693	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5498.59MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	95.9	1905	1890	1037
2	3	18	91.9	1724	1615	1081
3	1	18	54.7	1912	-	-
4	3	18	96.3	1169	1073	1805
5	2	18	66.9	1482	1550	-
6	3	18	84.9	1356	1953	1450
7	1	18	53.9	1157	-	-
8	1	18	66.2	1720	-	-
9	2	18	68.6	1530	1093	-
10	1	18	56.2	1296	-	-
11	2	18	71.9	1159	1021	-
12	1	18	65.8	1955	-	-
13	3	18	96.6	1394	1431	1422
14	3	18	93.5	1387	1104	1295
15	3	18	95.1	1907	1707	1748
16	2	18	67.1	1527	1594	-
17	2	18	75.8	1722	1665	-
18	2	18	83.1	1416	1455	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5494.19MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	57.5	1259	-	-
2	3	7	92.6	1516	1241	1129
3	2	7	77.9	1326	1684	-
4	3	7	85.9	1990	1968	1103
5	2	7	78.2	1614	1531	-
6	2	7	68.2	1332	1166	-
7	3	7	84.7	1985	1124	1502
8	3	7	86.9	1251	1118	1882
9	1	7	66.4	1959	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5494.99MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	79.3	1439	1557	-
2	2	9	68.3	1809	1924	-
3	1	9	66	1291	-	-
4	2	9	76.3	1782	1475	-
5	3	9	88.6	1491	1887	1790
6	3	9	93	1408	1055	1206
7	1	9	63.2	1437	-	-
8	3	9	98.8	1926	1403	1399
9	3	9	90.1	1202	1517	1686
10	1	9	60.4	1220	-	-
11	1	9	53.1	1543	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5497.39MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	15	64	1919	-	-
2	1	15	58.2	1321	-	-
3	1	15	51.9	1945	-	-
4	3	15	91.8	1287	1025	1428
5	1	15	51.6	1456	-	-
6	1	15	57.7	1904	-	-
7	2	15	76.9	1330	1002	-
8	2	15	68.3	1633	1406	-
9	3	15	94	1141	1801	1138
10	2	15	72.7	1261	1520	-
11	3	15	93.5	1185	1574	1354
12	3	15	97.5	1591	1112	1528
13	1	15	59	1172	-	-
14	2	15	82	1228	1196	-
15	2	15	78.1	1553	1506	-
16	2	15	76.7	1320	1143	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5497.39MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	88	1009	1911	1734
2	1	15	60	1444	-	-
3	1	15	63.6	1902	-	-
4	3	15	86.6	1916	1223	1488
5	1	15	61.6	1889	-	-
6	2	15	80	1573	1167	-
7	2	15	68.5	1938	1692	-
8	2	15	74.7	1265	1219	-
9	3	15	97.9	1587	1213	1637
10	1	15	52.5	1701	-	-
11	2	15	79.9	1454	1807	-
12	2	15	83.3	1930	1142	-
13	2	15	72.9	1606	1939	-
14	3	15	83.4	1778	1731	1314
15	3	15	94.8	1260	1067	1535
16	1	15	54.9	1440	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 15
Chirp Center Frequency: 5496.99MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	56.6	1147	-	-
2	2	14	72.6	1152	1601	-
3	2	14	69.1	1571	1803	-
4	3	14	99.4	1350	1146	1760
5	3	14	90.7	1064	1309	1896
6	3	14	86.1	1983	1816	1855
7	3	14	84.2	1370	1823	1646
8	2	14	70.4	1635	1854	-
9	3	14	91.3	1334	1136	1341
10	1	14	66.3	1360	-	-
11	3	14	93	1271	1057	1929
12	3	14	93.7	1906	1497	1479
13	3	14	85.8	1546	1015	1718
14	2	14	70.8	1001	1005	-
15	1	14	57	1685	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.99MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	94.3	1920	1954	1181
2	1	19	60.5	1922	-	-
3	1	19	66.2	1738	-	-
4	2	19	75.3	1595	1443	-
5	3	19	88.8	1777	1789	1150
6	2	19	76.4	1343	1420	-
7	2	19	73.9	1379	1982	-
8	3	19	91.5	1175	1221	1569
9	3	19	84	1238	1694	1306
10	3	19	89.7	1179	1628	1791
11	2	19	77.3	1967	1795	-
12	3	19	94	1696	1359	2000
13	3	19	99.2	1788	1596	1521
14	2	19	77.8	1086	1165	-
15	3	19	93.7	1753	1780	1192
16	3	19	95.5	1188	1853	1425
17	1	19	60.5	1434	-	-
18	2	19	77.9	1808	1698	-
19	3	19	88.5	1183	1773	1187

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 18
Chirp Center Frequency: 5498.19MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	90.8	1878	1465	1873
2	3	17	86.4	1648	1415	1135
3	1	17	62.9	1318	-	-
4	2	17	78.7	1282	1263	-
5	3	17	86.1	1273	1561	1501
6	1	17	51.8	1844	-	-
7	2	17	75.8	1442	1285	-
8	3	17	93.2	1541	1160	1383
9	3	17	95.3	1448	1642	1290
10	3	17	95.3	1678	1589	1526
11	3	17	87.1	1317	1723	1293
12	2	17	74.8	1240	1178	-
13	3	17	88.9	1806	1975	1935
14	2	17	77	1158	1932	-
15	3	17	95.6	1191	1512	1874
16	3	17	85.6	1830	1737	1089
17	2	17	72.8	1398	1761	-
18	1	17	56.6	1339	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 8
Chirp Center Frequency: 5566.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	58.1	1451	-	-
2	1	5	56	1771	-	-
3	2	5	78.6	1534	1372	-
4	2	5	82.8	1511	1869	-
5	2	5	81.1	1532	1266	-
6	3	5	85.2	1758	1137	1663
7	1	5	59.6	1249	-	-
8	1	5	63.3	1613	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5566.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.2	1711	1066	1483
2	3	5	85.1	1120	1108	1400
3	3	5	92.7	1862	1155	1305
4	3	5	97.7	1980	1301	1446
5	2	5	70.9	1007	1095	-
6	2	5	82.4	1787	1632	-
7	1	5	65.8	1871	-	-
8	3	5	97.3	1324	1476	1872

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5563.42MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	80.1	1452	1746	-
2	2	13	70.6	1827	1474	-
3	2	13	81.4	1325	1539	-
4	2	13	81.8	1898	1900	-
5	2	13	80.1	1248	1524	-
6	2	13	73.4	1092	1255	-
7	1	13	62.9	1579	-	-
8	2	13	83.2	1276	1351	-
9	2	13	78.6	1575	1950	-
10	3	13	96.2	1784	1494	1003
11	3	13	96.9	1610	1367	1274
12	1	13	64.9	1915	-	-
13	3	13	88.4	1503	1876	1087
14	2	13	66.9	1207	1315	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5565.82MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	53.5	1670	-	-
2	3	7	92.2	1893	1908	1164
3	2	7	70.8	1193	1828	-
4	3	7	88.8	1514	1634	1313
5	1	7	52.4	1229	-	-
6	2	7	71.9	1969	1038	-
7	1	7	59.9	1952	-	-
8	1	7	57.9	1101	-	-
9	1	7	55.2	1022	-	-
10	2	7	77.7	1149	1006	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5563.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	14	69.1	1525	1197	-
2	2	14	72.7	1976	1838	-
3	1	14	59.7	1849	-	-
4	3	14	90.8	1080	1913	1767
5	1	14	50.5	1972	-	-
6	3	14	97.7	1310	1867	1427
7	2	14	74.4	1910	1819	-
8	1	14	54.6	1277	-	-
9	1	14	59	1481	-	-
10	3	14	91.6	1023	1024	1079
11	3	14	97	1410	1914	1480
12	2	14	75	1781	1886	-
13	1	14	54.2	1505	-	-
14	3	14	91.1	1008	1363	1298
15	2	14	76.6	1567	1948	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5564.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	84.8	1556	1510	1182
2	3	10	93.1	1956	1458	1386
3	3	10	95.4	1388	1704	1826
4	1	10	54.2	1962	-	-
5	3	10	84.9	1812	1706	1362
6	3	10	88.3	1555	1031	1056
7	3	10	94.8	1852	1292	1652
8	2	10	74.9	1084	1752	-
9	2	10	75.3	1210	1328	-
10	2	10	81.5	1937	1349	-
11	1	10	50.4	1649	-	-
12	2	10	76.8	1338	1270	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5562.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	82.1	1076	1629	-
2	2	15	80	1230	1257	-
3	3	15	93.9	1994	1447	1690
4	3	15	87.4	1507	1645	1365
5	2	15	72.1	1768	1897	-
6	1	15	65.3	1747	-	-
7	1	15	53.7	1540	-	-
8	1	15	62.7	1423	-	-
9	1	15	57.4	1829	-	-
10	1	15	63.7	1113	-	-
11	2	15	72.2	1604	1122	-
12	2	15	82.7	1396	1860	-
13	2	15	81	1047	1232	-
14	2	15	71.8	1026	1785	-
15	3	15	92.3	1358	1695	1605
16	1	15	55.9	1417	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 11
Chirp Center Frequency: 5565.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	9	96.9	1709	1687	1743
2	2	9	69.9	1252	1414	-
3	2	9	78.6	1647	1043	-
4	3	9	88	1180	1884	1283
5	2	9	79.8	1656	1061	-
6	1	9	62.2	1662	-	-
7	2	9	67.7	1224	1199	-
8	2	9	78.9	1655	1250	-
9	1	9	64.6	1214	-	-
10	1	9	53.7	1380	-	-
11	2	9	70.4	1401	1364	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 8
Chirp Center Frequency: 5566.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	89.4	1170	1109	1565
2	2	5	74.3	1243	1059	-
3	3	5	97.8	1697	1946	1712
4	3	5	84.5	1800	1688	1245
5	1	5	59.2	1689	-	-
6	1	5	50.1	1477	-	-
7	2	5	70.8	1840	1942	-
8	3	5	92.4	1174	1028	1094

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5564.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	74.6	1792	1593	-
2	1	10	65.1	1117	-	-
3	1	10	54.2	1538	-	-
4	2	10	74.9	1716	1999	-
5	1	10	59.6	1627	-	-
6	1	10	50.5	1337	-	-
7	2	10	78.3	1239	1562	-
8	2	10	69.1	1903	1190	-
9	2	10	71	1965	1717	-
10	2	10	70.9	1226	1762	-
11	1	10	62.7	1345	-	-
12	2	10	73.2	1770	1493	-

802.11be (EHT160) 5250MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5256.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5257.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5255.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5257.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5254.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 14
Chirp Center Frequency: 5254.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5321.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5323.61MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5319.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5322.41MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5322.81MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5325.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5320.81MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5319.61MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5323.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5320.41MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT160) 5570MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	66.2	1850	-	-
2	1	10	59.7	1055	-	-
3	1	10	58.4	1613	-	-
4	3	10	87	1110	1632	1820
5	1	10	58.4	1697	-	-
6	3	10	90.3	1071	1719	1488
7	2	10	69.3	1837	1103	-
8	2	10	80.6	1481	1231	-
9	2	10	71.9	1671	1890	-
10	3	10	84.5	1145	1259	1953
11	2	10	73.9	1908	1328	-
12	3	10	90.4	1999	1755	1596

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_02
Number of Bursts in Trial: 10
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	57.4	1638	-	-
2	3	8	95.8	1614	1284	1828
3	3	8	91.4	1944	1740	1673
4	1	8	53.1	1948	-	-
5	2	8	74.7	1277	1664	-
6	1	8	63.6	1505	-	-
7	2	8	75.9	1450	1264	-
8	1	8	62.2	1257	-	-
9	2	8	81.7	1934	1276	-
10	1	8	63.3	1288	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 10
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	50.1	1190	-	-
2	1	7	61.7	1446	-	-
3	3	7	97.8	1465	1421	1274
4	2	7	76.8	1026	1642	-
5	1	7	60.1	1977	-	-
6	3	7	92.9	1127	1987	1969
7	1	7	50	1370	-	-
8	1	7	53.9	1729	-	-
9	2	7	81.4	1869	1610	-
10	2	7	78	1289	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	92.2	1336	1789	1893
2	2	16	77.5	1546	1350	-
3	2	16	82.1	1685	1788	-
4	3	16	98.2	1956	1260	1708
5	2	16	81.4	1255	1272	-
6	1	16	52.3	1797	-	-
7	2	16	81.2	1873	1391	-
8	3	16	89	1806	1290	1175
9	3	16	89	1617	1588	1897
10	2	16	73.8	1104	1817	-
11	3	16	92.8	1706	1831	1335
12	1	16	54.3	1937	-	-
13	2	16	71.5	1891	1093	-
14	1	16	52.9	1228	-	-
15	1	16	64.9	1075	-	-
16	1	16	65.1	1598	-	-
17	1	16	51.9	1742	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	7	90.7	1397	1646	1349
2	1	7	55.5	1033	-	-
3	2	7	75.9	1888	1320	-
4	1	7	66.1	1019	-	-
5	1	7	59	1004	-	-
6	3	7	96	1533	1674	1985
7	1	7	52.9	1950	-	-
8	1	7	59.5	1575	-	-
9	3	7	96.7	1324	1591	1063
10	3	7	89.3	1573	1114	1001

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	17	81.7	1894	1040	-
2	2	17	80.1	1984	1597	-
3	2	17	76.4	1981	1210	-
4	2	17	80.5	1874	1325	-
5	2	17	68	1000	1604	-
6	1	17	53.1	1733	-	-
7	3	17	95.9	1180	1676	1308
8	3	17	98.3	1747	1457	1542
9	2	17	79.9	1297	1569	-
10	1	17	63.6	1144	-	-
11	3	17	93.3	1396	1023	1009
12	2	17	71.8	1509	1346	-
13	2	17	72.4	1775	1510	-
14	2	17	82.5	1357	1917	-
15	3	17	86.9	1005	1307	1931
16	2	17	73.3	1701	1696	-
17	1	17	57.9	1943	-	-
18	2	17	70.5	1805	1267	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	95.9	1097	1861	1316
2	3	11	90.2	1827	1776	1434
3	3	11	94.8	1469	1574	1223
4	1	11	61.8	1703	-	-
5	3	11	95	1863	1232	1174
6	3	11	91	1082	1619	1672
7	1	11	59.4	1079	-	-
8	3	11	98.5	1713	1372	1832
9	1	11	55.5	1705	-	-
10	1	11	61.9	1952	-	-
11	2	11	83.2	1866	1875	-
12	2	11	81.5	1889	1455	-
13	2	11	79.2	1220	1737	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	14	88.7	1242	1416	1249
2	3	14	84.7	1459	1989	1100
3	1	14	63	1582	-	-
4	3	14	99.5	1433	1084	1091
5	1	14	58.8	1717	-	-
6	1	14	62.5	1083	-	-
7	3	14	93.3	1386	1448	1809
8	2	14	74.8	1731	1520	-
9	1	14	51.2	1156	-	-
10	2	14	75.7	1366	1963	-
11	1	14	54.7	1178	-	-
12	3	14	85	1814	1133	1607
13	1	14	51.5	1741	-	-
14	1	14	58.7	1714	-	-
15	2	14	68.8	1447	1207	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	83.2	1625	1330	-
2	3	12	93.5	1938	1665	1484
3	2	12	79.2	1250	1525	-
4	3	12	85.7	1119	1760	1158
5	3	12	88.1	1057	1384	1087
6	2	12	82.5	1688	1940	-
7	1	12	63.7	1064	-	-
8	1	12	56.5	1581	-	-
9	3	12	94.6	1811	1857	1988
10	2	12	69.8	1702	1769	-
11	3	12	85.2	1734	1878	1477
12	3	12	85.5	1247	1785	1196
13	2	12	71.1	1270	1886	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 16
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	69.6	1500	1578	-
2	3	16	97.6	1656	1310	1030
3	3	16	83.9	1002	1773	1199
4	1	16	65.1	1279	-	-
5	3	16	98.5	1254	1143	1532
6	3	16	84.5	1061	1880	1168
7	1	16	54.5	1803	-	-
8	3	16	87.1	1699	1523	1122
9	1	16	59.4	1426	-	-
10	2	16	83	1181	1137	-
11	2	16	78.1	1639	1010	-
12	1	16	60.7	1492	-	-
13	1	16	64.6	1693	-	-
14	3	16	95.7	1848	1256	1201
15	3	16	94.6	1286	1399	1490
16	1	16	64.4	1390	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	90.1	1198	1245	1323
2	2	12	76.8	1724	1571	-
3	3	12	93.5	1722	1187	1979
4	2	12	82.2	1456	1812	-
5	3	12	90.6	1230	1382	1712
6	1	12	65.3	1867	-	-
7	1	12	62	1134	-	-
8	2	12	82.7	1442	1818	-
9	3	12	97.5	1965	1939	2000
10	3	12	93.5	1991	1113	1202
11	3	12	96.8	1135	1644	1377
12	2	12	75	1634	1726	-
13	2	12	78.2	1375	1994	-
14	2	12	68.4	1246	1871	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5497.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	17	79.7	1802	1973	-
2	2	17	73.7	1576	1086	-
3	2	17	77.1	1444	1261	-
4	2	17	72.2	1499	1334	-
5	1	17	55.2	1864	-	-
6	1	17	53.6	1369	-	-
7	3	17	91.8	1197	1872	1545
8	3	17	89.6	1855	1824	1537
9	3	17	86.6	1936	1590	1975
10	2	17	67	1407	1615	-
11	1	17	54.2	1204	-	-
12	2	17	81.8	1550	1068	-
13	2	17	73.8	1663	1142	-
14	1	17	60.5	1402	-	-
15	1	17	51.1	1017	-	-
16	2	17	75	1470	1420	-
17	2	17	73.5	1933	1405	-
18	3	17	86.8	1504	1425	1648

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5493.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	69.1	1235	1679	-
2	3	7	92.1	1807	1670	1269
3	1	7	54.4	1495	-	-
4	3	7	93	1689	1868	1239
5	3	7	91.7	1609	1594	1896
6	1	7	53.2	1559	-	-
7	2	7	80.5	1553	1926	-
8	1	7	54.2	1385	-	-
9	3	7	85.5	1106	1764	1476

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_14

Number of Bursts in Trial: 19

Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	51.2	1327	-	-
2	2	19	67.6	1585	1983	-
3	1	19	54.9	1810	-	-
4	3	19	87.7	1428	1016	1052
5	2	19	79.6	1221	1653	-
6	1	19	58.9	1339	-	-
7	3	19	91	1035	1923	1095
8	1	19	53.3	1311	-	-
9	1	19	54.3	1959	-	-
10	3	19	83.6	1840	1285	1522
11	3	19	92.4	1628	1836	1765
12	3	19	90.4	1039	1024	1786
13	3	19	90.9	1721	1543	1647
14	2	19	72.6	1758	1214	-
15	1	19	50.4	1901	-	-
16	3	19	90.2	1645	1555	1972
17	2	19	76.4	1159	1218	-
18	2	19	78	1090	1454	-
19	1	19	58.8	1529	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5497.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	91.6	1808	1692	1728
2	1	18	51.5	1067	-	-
3	2	18	81.6	1414	1282	-
4	2	18	72.5	1166	1752	-
5	2	18	69.9	1051	1815	-
6	1	18	59.9	1153	-	-
7	1	18	55.9	1429	-	-
8	3	18	86.1	1704	1215	1843
9	1	18	63.9	1531	-	-
10	3	18	86.7	1252	1536	1587
11	2	18	82	1565	1029	-
12	2	18	73.9	1092	1229	-
13	3	18	91.8	1854	1443	1074
14	1	18	50.9	1058	-	-
15	2	18	68.2	1593	1744	-
16	3	18	90.6	1678	1314	1406
17	2	18	71.9	1659	1479	-
18	2	18	81.6	1234	1184	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5492.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	79.3	1340	1031	-
2	2	6	74.7	1723	1177	-
3	2	6	72.9	1976	1852	-
4	2	6	82.8	1961	1394	-
5	1	6	57.1	1147	-	-
6	3	6	96.8	1036	1766	1179
7	3	6	91.4	1408	1568	1303
8	2	6	81.1	1941	1474	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	96.4	1379	1579	1924
2	2	12	78.2	1720	1562	-
3	2	12	69.4	1025	1501	-
4	1	12	54	1464	-	-
5	1	12	52.7	1629	-	-
6	1	12	65.3	1834	-	-
7	2	12	75.2	1506	1194	-
8	2	12	71.6	1519	1743	-
9	1	12	62.7	1718	-	-
10	3	12	83.9	1862	1345	1108
11	2	12	69.7	1491	1028	-
12	3	12	95.2	1986	1268	1453
13	3	12	85	1225	1263	1601
14	2	12	77.8	1053	1946	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5494MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.6	1121	1027	-
2	2	9	72.8	1471	1435	-
3	2	9	77	1280	1305	-
4	1	9	66.6	1085	-	-
5	2	9	72.4	1080	1919	-
6	1	9	59.7	1165	-	-
7	1	9	50.6	1398	-	-
8	3	9	89.5	1062	1753	1879
9	2	9	72.7	1436	1463	-
10	2	9	82.1	1176	1125	-
11	2	9	78.6	1496	1395	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.6	1205	-	-
2	3	13	97.1	1990	1056	1475
3	1	13	53.3	1978	-	-
4	3	13	86	1152	1626	1561
5	1	13	58.7	1633	-	-
6	3	13	94.5	1660	1101	1954
7	3	13	84.8	1473	1967	1800
8	2	13	81.1	1502	1332	-
9	3	13	88.9	1838	1321	1404
10	1	13	63.6	1691	-	-
11	2	13	77.7	1301	1342	-
12	2	13	66.7	1904	1076	-
13	1	13	59.9	1618	-	-
14	3	13	83.9	1480	1206	1132

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5493.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	8	66.7	1905	1374	-
2	3	8	98.7	1167	1389	1295
3	2	8	70.1	1427	1050	-
4	3	8	88.2	1816	1211	1278
5	3	8	84.3	1020	1951	1312
6	2	8	70.9	1603	1557	-
7	2	8	76.8	1799	1111	-
8	3	8	96.6	1302	1652	1960
9	1	8	51.5	1558	-	-
10	1	8	51	1507	-	-
11	1	8	50.1	1271	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5639.34MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	15	55.8	1683	-	-
2	3	15	90.6	1859	1865	1401
3	2	15	74.4	1667	1072	-
4	2	15	81.6	1821	1077	-
5	2	15	80.4	1877	1997	-
6	1	15	56.9	1253	-	-
7	1	15	55.5	1858	-	-
8	3	15	87.4	1856	1123	1768
9	2	15	75.5	1680	1348	-
10	3	15	94.2	1483	1521	1749
11	2	15	68.2	1300	1945	-
12	2	15	71.8	1739	1913	-
13	3	15	85.7	1430	1422	1515
14	1	15	54	1352	-	-
15	3	15	89.5	1007	1853	1920
16	3	15	84.9	1013	1592	1974

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5641.74MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	64	1359	-	-
2	3	9	96.2	1164	1212	1338
3	1	9	64.1	1037	-	-
4	3	9	96	1209	1478	1762
5	1	9	56.1	1102	-	-
6	2	9	67	1112	1541	-
7	2	9	82.8	1833	1451	-
8	1	9	55.7	1409	-	-
9	1	9	61	1835	-	-
10	2	9	80.6	1266	1915	-
11	1	9	51.2	1309	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5643.34MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	88.5	1980	1014	1233
2	1	5	61.1	1304	-	-
3	1	5	51.7	1589	-	-
4	1	5	62	1958	-	-
5	3	5	95.6	1929	1910	1535
6	1	5	52.3	1045	-	-
7	3	5	85.9	1586	1265	1096
8	1	5	52.8	1241	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5642.14MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	53.8	1528	-	-
2	1	8	60.3	1160	-	-
3	3	8	99.6	1411	1631	1116
4	1	8	58.5	1368	-	-
5	1	8	56.6	1124	-	-
6	2	8	72.2	1563	1649	-
7	2	8	79.3	1530	1654	-
8	3	8	84.5	1191	1138	1847
9	3	8	89.7	1813	1982	1668
10	3	8	98.5	1846	1344	1439
11	2	8	76.8	1995	1738	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5637.34MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	84.4	1756	1472	1460
2	3	20	84.2	1258	1942	1419
3	3	20	94.8	1275	1089	1011
4	3	20	86	1780	1353	1117
5	1	20	62.7	1015	-	-
6	1	20	50.4	1928	-	-
7	3	20	87.4	1489	1378	1829
8	1	20	55	1687	-	-
9	3	20	94	1438	1611	1730
10	3	20	88.9	1754	1748	1066
11	1	20	57.7	1041	-	-
12	2	20	68.6	1150	1624	-
13	2	20	70.6	1657	1466	-
14	3	20	99.8	1195	1605	1761
15	1	20	55.6	1022	-	-
16	2	20	67	1643	1921	-
17	2	20	76.3	1630	1482	-
18	2	20	73.7	1251	1534	-
19	2	20	82.2	1226	1767	-
20	2	20	72.6	1281	1900	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5640.14MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	69.5	1088	1410	-
2	3	13	99.9	1641	1203	1968
3	1	13	51.2	1736	-	-
4	3	13	85.6	1172	1169	1666
5	2	13	74.5	1200	1163	-
6	1	13	64.5	1065	-	-
7	3	13	87.6	1129	1830	1822
8	1	13	57.4	1018	-	-
9	2	13	73.8	1620	1804	-
10	2	13	76.8	1296	1006	-
11	2	13	82.5	1914	1779	-
12	3	13	93.1	1423	1313	1602
13	1	13	57.2	1922	-	-
14	3	13	84.2	1054	1098	1651

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5642.14MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	8	96.2	1497	1627	1293
2	2	8	67.1	1750	1189	-
3	3	8	93.8	1930	1661	1616
4	2	8	75.1	1860	1315	-
5	3	8	89.1	1130	1640	1148
6	1	8	61.5	1413	-	-
7	1	8	58.1	1883	-	-
8	3	8	97.4	1826	1337	1695
9	3	8	91.9	1331	1487	1217
10	1	8	64	1784	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5638.14MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	96.1	1347	1059	1161
2	3	18	91.7	1424	1621	1622
3	2	18	79	1709	1801	-
4	1	18	58.7	1882	-	-
5	1	18	51	1236	-	-
6	1	18	55.1	1046	-	-
7	1	18	53	1170	-	-
8	1	18	60.8	1998	-	-
9	1	18	57.5	1329	-	-
10	2	18	75.8	1486	1650	-
11	1	18	57.3	1544	-	-
12	3	18	84.6	1363	1792	1566
13	2	18	83	1392	1371	-
14	1	18	59.1	1415	-	-
15	1	18	61.4	1012	-	-
16	3	18	98.2	1049	1032	1294
17	1	18	62.8	1694	-	-
18	2	18	79.9	1526	1485	-
19	2	18	81.3	1318	1957	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5643.34MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	67.1	1790	1048	-
2	1	5	56.3	1925	-	-
3	1	5	64.7	1612	-	-
4	1	5	61.4	1567	-	-
5	3	5	86.4	1746	1365	1109
6	1	5	53.6	1887	-	-
7	3	5	88.6	1770	1403	1021
8	2	5	73.3	1262	1970	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5642.94MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	51.1	1105	-	-
2	3	6	84.6	1623	1154	1213
3	2	6	70.6	1554	1774	-
4	1	6	64.5	1381	-	-
5	2	6	72.2	1549	1793	-
6	1	6	58	1343	-	-
7	3	6	87.3	1388	1698	1173
8	3	6	89.6	1139	1186	1556
9	2	6	82.8	1727	1468	-

--- END ---