




B/W WIRELESS CAMERA

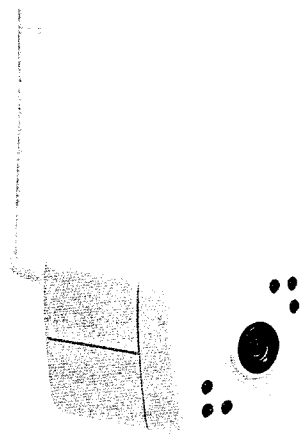


INSTRUCTION MANUAL




Front View



Rear View



Up View

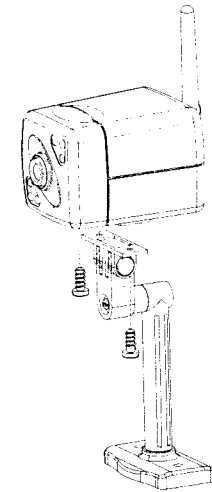

Characteristics:

- * Super high resolution and sensitivity
- * Low consumption and excellent stabilization
- * Wireless Audio/Video out
- * 2.4HGz band, four different bands can be selected
- * Fit for short distance wireless security system of inside and outside

Specifications:

Channel	CH1	CH2	CH3	CH4
Frequency	2413MHz	2432MHz	2451MHz	2470MHz
Impedance	75 Ω			
Video out	1Vp-p			
Audio out	2Vp-p Max			
Voltage	15V/300mA			

Installation:

- 1) To install mounting bracket in the place you want with screw, then fix camera and mounting bracket;
- 2) Camera and mounting bracket can be turned freely (360° up and down, left and right) to adjust supervising direction;
- 3) Adjusting screw to adjust tightness of turn direction;
- 4) To install the antenna in the clockwise direction into the "ANT" socket on back of the camera;
- 5) Use DC 15V/300mA adapter to supply the camera;
- 6) This camera should work with the wireless receiving monitor. Any one of "wireless channel select button" of the monitor can be selected, and the selected button should be adjusted to the position of "ON", the channel of this camera also should be set to the corresponding channel. If want to receive more than two channel-signal, remember the selected buttons of the monitor and the camera should be set corresponding, then picture will switch in each four seconds

Notice:

- 1) To protect camera do not expose to excessive dust or humidity
- 2) Do not place camera in a location subject to direct sunlight or high light
- 3) Make sure the power to the television or monitor is turned off and the power supply
- 4) The bracket for the camera can be selected as you like

Notice : The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.