



FCC TEST REPORT

FCC ID:2A6SL-T9

Report Number..... ZKT-220507L2989E

Date of Test..... Apr. 25, 2022 to May. 10, 2022

Date of issue..... May. 10, 2022

Total number of pages..... 70

Test Result PASS

Testing Laboratory..... Shenzhen ZKT Technology Co., Ltd.

Address 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name Hongxinyi Technology (Shenzhen) Co., LTD

Address Floor 3 Building A, No. 207, Fenghuang Xingye 2nd Road, Fuyong Town, Baoan District, Shenzhen

Manufacturer's name Hongxinyi Technology (Shenzhen) Co., LTD

Address Floor 3 Building A, No. 207, Fenghuang Xingye 2nd Road, Fuyong Town, Baoan District, Shenzhen

Test specification:

Standard..... FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... /

Non-standard test method N/A

Test Report Form No..... TRF-EL-112_V0**Test Report Form(s) Originator..... ZKT Testing****Master TRF Dated: 2021-04-22**

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... TWS Bluetooth headset

Trademark N/A

Model/Type reference..... T9

Ratings..... DC 5V from Adapter input AC 120V/60Hz or DC 3.7V from Battery



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Alen He

Reviewer (name + signature).....: Joe Liu

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION	5
2. TEST SUMMARY	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 Test Setup Configuration	9
3.3 Support Equipment	9
3.4 Test Mode	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	12
4.1 Conducted emissions	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 Test Result	14
4.2 Radiated emissions	16
4.2.1 Radiated Emission Limits	16
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 TEST RESULTS	19
5. RADIATED BAND EMISSION MEASUREMENT	24
5.1 Test Requirement:	24
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM TEST STANDARD	25
5.4 TEST SETUP	25
5.5 EUT OPERATING CONDITIONS	25
5.6 TEST RESULT	26
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	28
6.1 Limit	28
6.2 Test Setup	28
6.3 Test procedure	28
6.4 DEVIATION FROM STANDARD	28
6.5 Test Result	29
7. 20DB&99% BANDWIDTH	41
7.1 Test Setup	41
7.2 Limit	41
7.3 Test procedure	41
7.4 DEVIATION FROM STANDARD	41



7.5 Test Result	41
8. MAXIMUM PEAK OUTPUT POWER	48
8.1 Block Diagram Of Test Setup	48
8.2 Limit	48
8.3 Test procedure	48
8.4 DEVIATION FROM STANDARD	48
8.5 Test Result	48
9. HOPPING CHANNEL SEPARATION	54
9.1 Test Setup	54
9.2 Test procedure	54
9.3 DEVIATION FROM STANDARD	54
9.4 Test Result	55
10.NUMBER OF HOPPING FREQUENCY	59
10.1 Test Setup	60
10.2 Test procedure	60
10.3 DEVIATION FROM STANDARD	60
10.4 Test Result	60
11. DWELL TIME	62
11.1 Test Setup	62
11.2 Test procedure	62
11.3 DEVIATION FROM STANDARD	62
11.4 Test Result	63
12. ANTENNA REQUIREMENT	69
13. TEST SETUP PHOTO	70
14. EUT CONSTRUCTIONAL DETAILS	70



1. VERSION

Report No.	Version	Description	Approved
ZKT-220507L2989E	Rev.01	Initial issue of report	May. 10, 2022



2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth 99% OCB	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225
Designation Number: CN1299
IC Registered No.: 27033
Designation Number: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	TWS Bluetooth headset
Model No.:	T9
Series Model:	N/A
Model Different.:	N/A
Sample ID	ZKT-220507L2989E-1
Sample(s) Status:	Engineer sample
Channel numbers:	79
Channel separation:	2402MHz~2480MHz
Modulation technology:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Qty:	1
Antenna Type:	Internal Antenna
Antenna gain:	0 dBi
Power supply:	DC 5V from Adapter input AC 120V/60Hz or DC 3.7V from Battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		



Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

3.2 Test Setup Configuration

Conducted Emission

DC Line

EUT

Radiated Emission

EUT

Conducted Spurious

EUT

3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	TWS Bluetooth headset	N/A	T9	N/A	EUT
E-2	Adapter	N/A	FYD-0502000US	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	RF Test Tool
Power level setup	<7dBm



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 22, 2021	Sep. 21, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 22, 2021	Sep. 21, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Sep. 22, 2021	Sep. 21, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 22, 2021	Sep. 21, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Sep. 22, 2021	Sep. 21, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 22, 2021	Sep. 21, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 22, 2021	Sep. 21, 2022
8	Amplifier (1GHz-40GHz)	全聚达	DLE-161	097	Sep. 22, 2021	Sep. 21, 2022
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Sep. 22, 2021	Sep. 21, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 22, 2021	Sep. 21, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 22, 2021	Sep. 21, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 22, 2021	Sep. 21, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 22, 2021	Sep. 21, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 22, 2021	Sep. 21, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 22, 2021	Sep. 21, 2022
3	Test Cable	N/A	C01	N/A	Sep. 22, 2021	Sep. 21, 2022
4	Test Cable	N/A	C02	N/A	Sep. 22, 2021	Sep. 21, 2022
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 22, 2021	Sep. 21, 2022
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 22, 2021	Sep. 21, 2022



4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

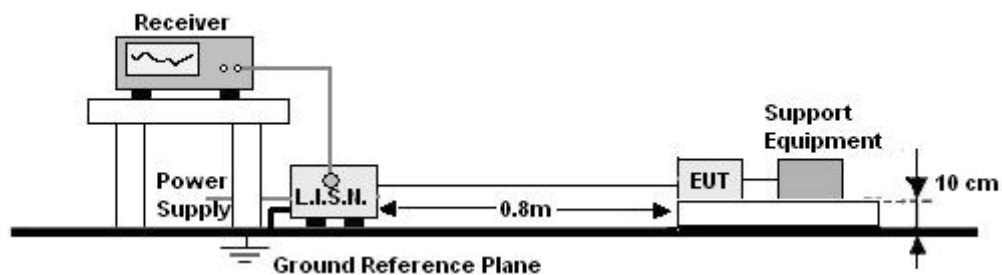



4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



4.1.6 Test Result

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

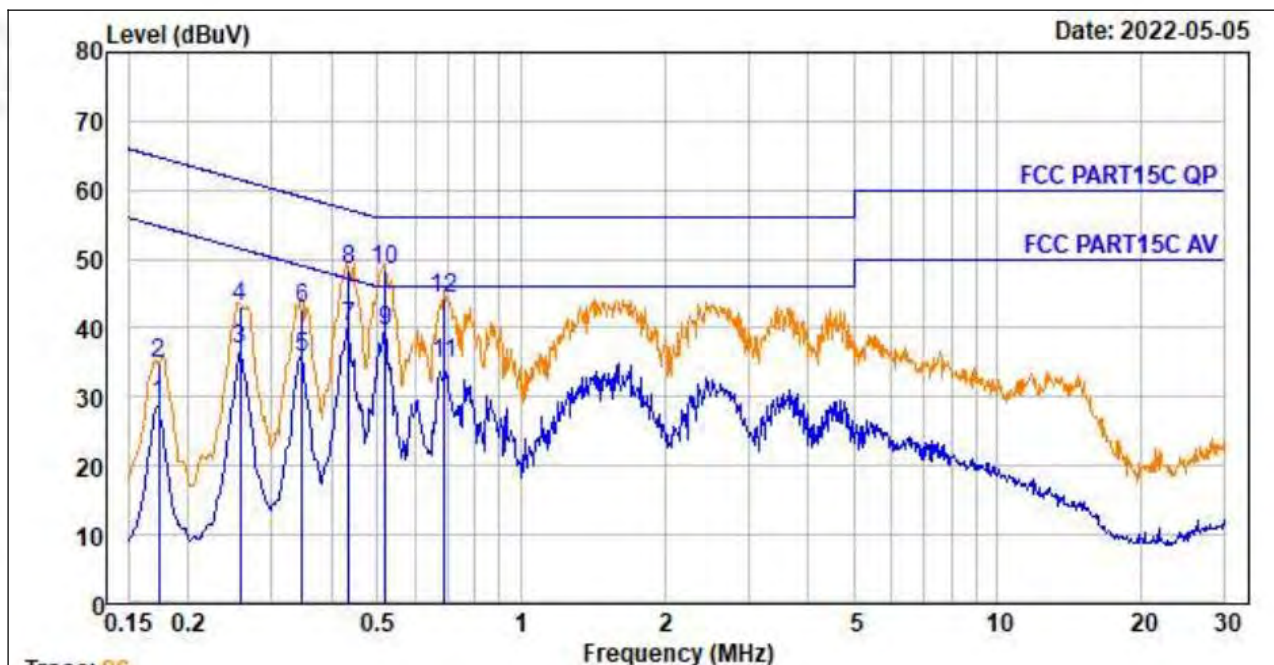


No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1	0.174	0.24	10.06	18.64	28.94	54.77	-25.83	Average
2	0.174	0.24	10.06	24.57	34.87	64.77	-29.90	QP
3	0.258	0.34	10.23	26.28	36.85	51.51	-14.66	Average
4	0.258	0.34	10.23	32.65	43.22	61.51	-18.29	QP
5	0.346	0.39	10.35	25.03	35.77	49.05	-13.28	Average
6	0.346	0.39	10.35	32.16	42.90	59.05	-16.15	QP
7	0.435	0.41	10.45	29.38	40.24	47.15	-6.91	Average
8	0.435	0.41	10.45	37.51	48.37	57.15	-8.78	QP
9	0.518	0.43	10.52	28.66	39.61	46.00	-6.39	Average
10	0.518	0.43	10.52	37.56	48.51	56.00	-7.49	QP
11	0.690	0.44	10.64	23.79	34.87	46.00	-11.13	Average
12	0.690	0.44	10.64	33.12	44.20	56.00	-11.80	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

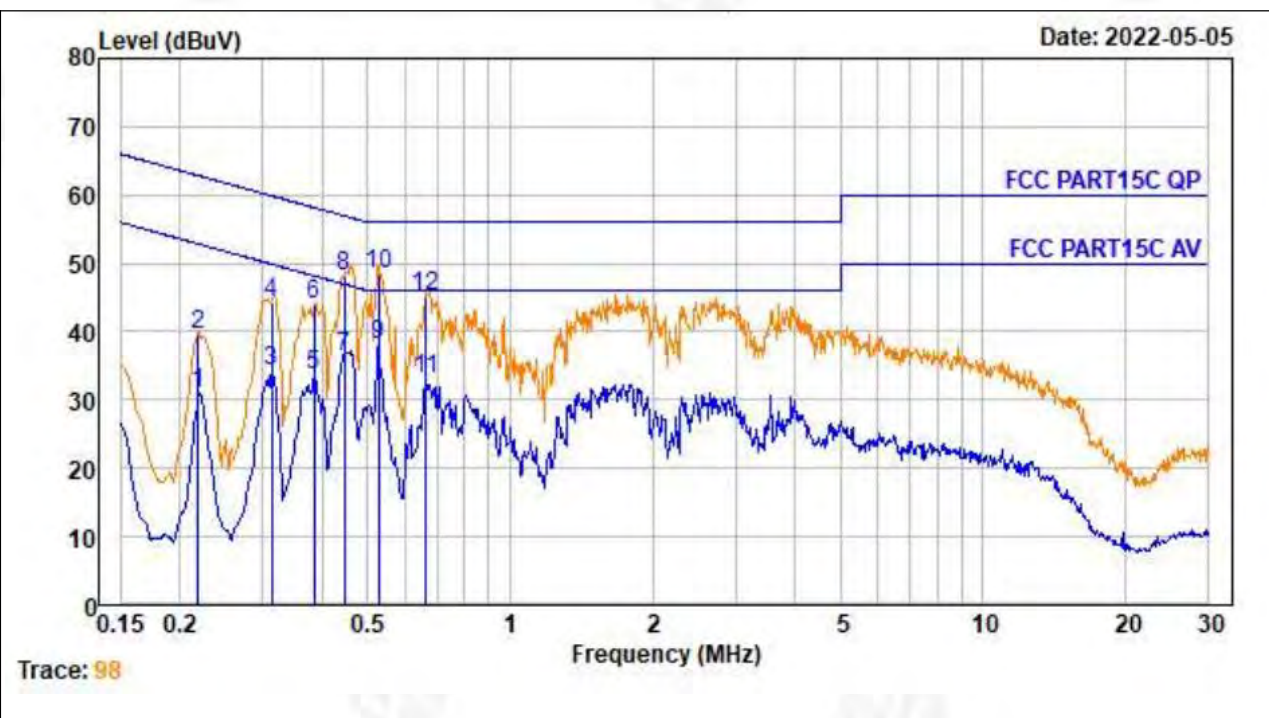

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1	0.219	0.30	10.16	20.55	31.01	52.88	-21.87	Average
2	0.219	0.30	10.16	29.16	39.62	62.88	-23.26	QP
3	0.313	0.38	10.31	23.44	34.13	49.88	-15.75	Average
4	0.313	0.38	10.31	33.56	44.25	59.88	-15.63	QP
5	0.385	0.40	10.40	22.71	33.51	48.17	-14.66	Average
6	0.385	0.40	10.40	33.15	43.95	58.17	-14.22	QP
7	0.447	0.42	10.46	25.34	36.22	46.93	-10.71	Average
8	0.447	0.42	10.46	37.15	48.03	56.93	-8.90	QP
9	0.527	0.43	10.53	27.14	38.10	46.00	-7.90	Average
10	0.527	0.43	10.53	37.46	48.42	56.00	-7.58	QP
11	0.665	0.44	10.63	22.13	33.20	46.00	-12.80	Average
12	0.665	0.44	10.63	34.15	45.22	56.00	-10.78	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

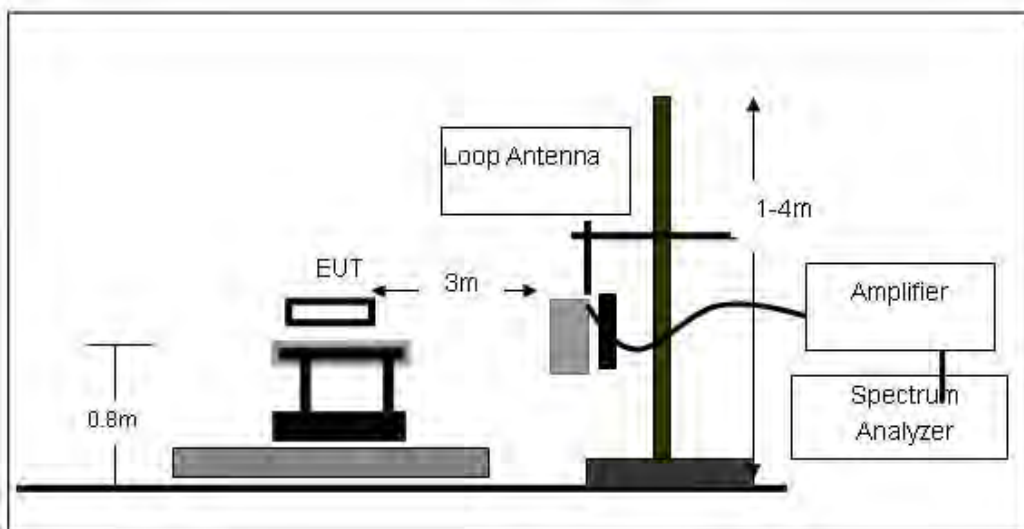




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

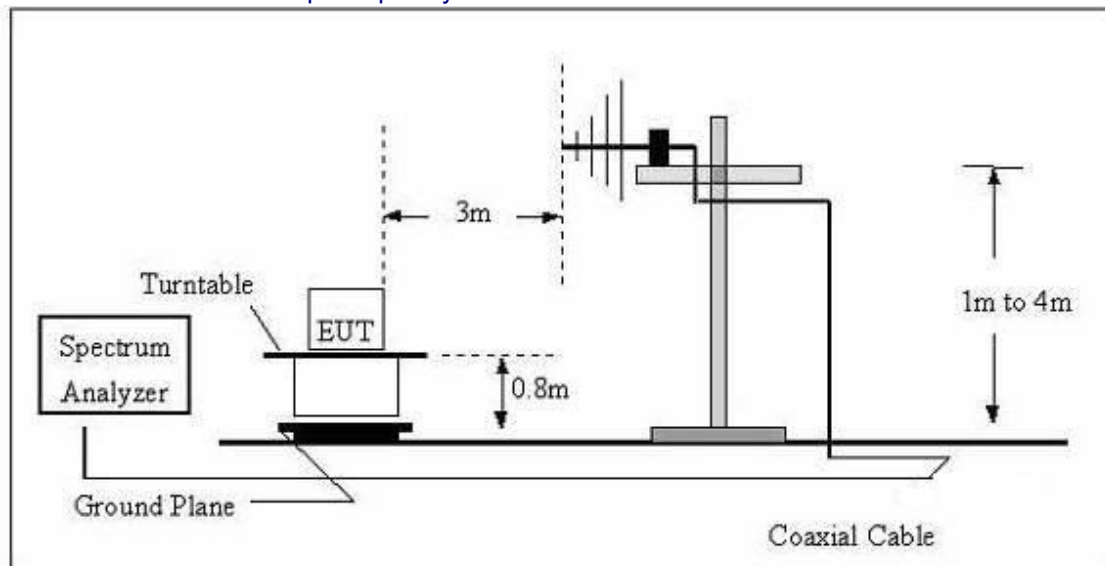

(C) Radiated Emission Test-Up Frequency Above 1GHz

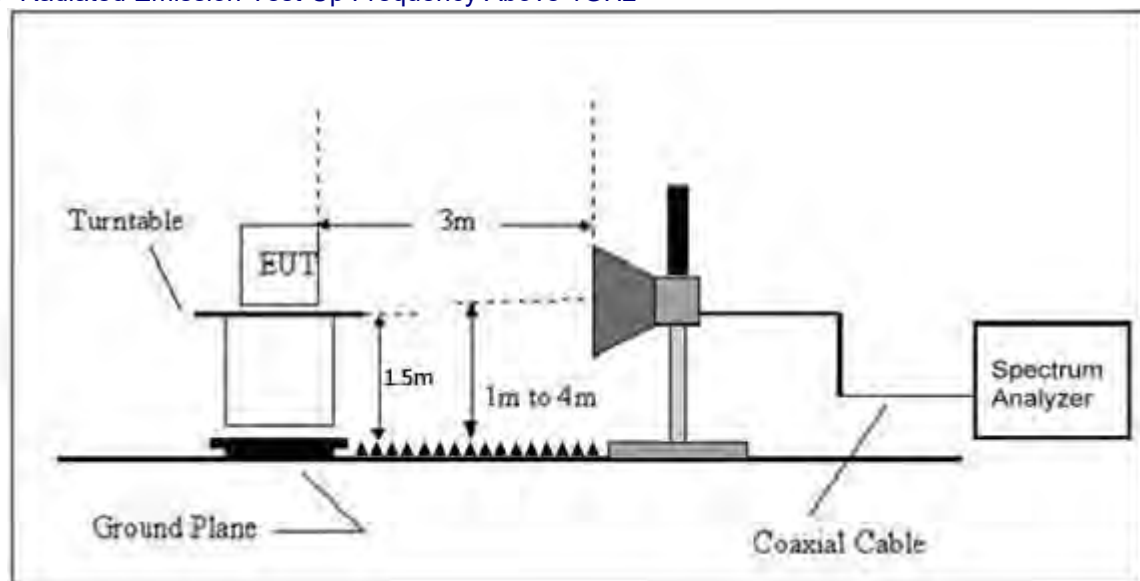

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.




Between 30MHz – 1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

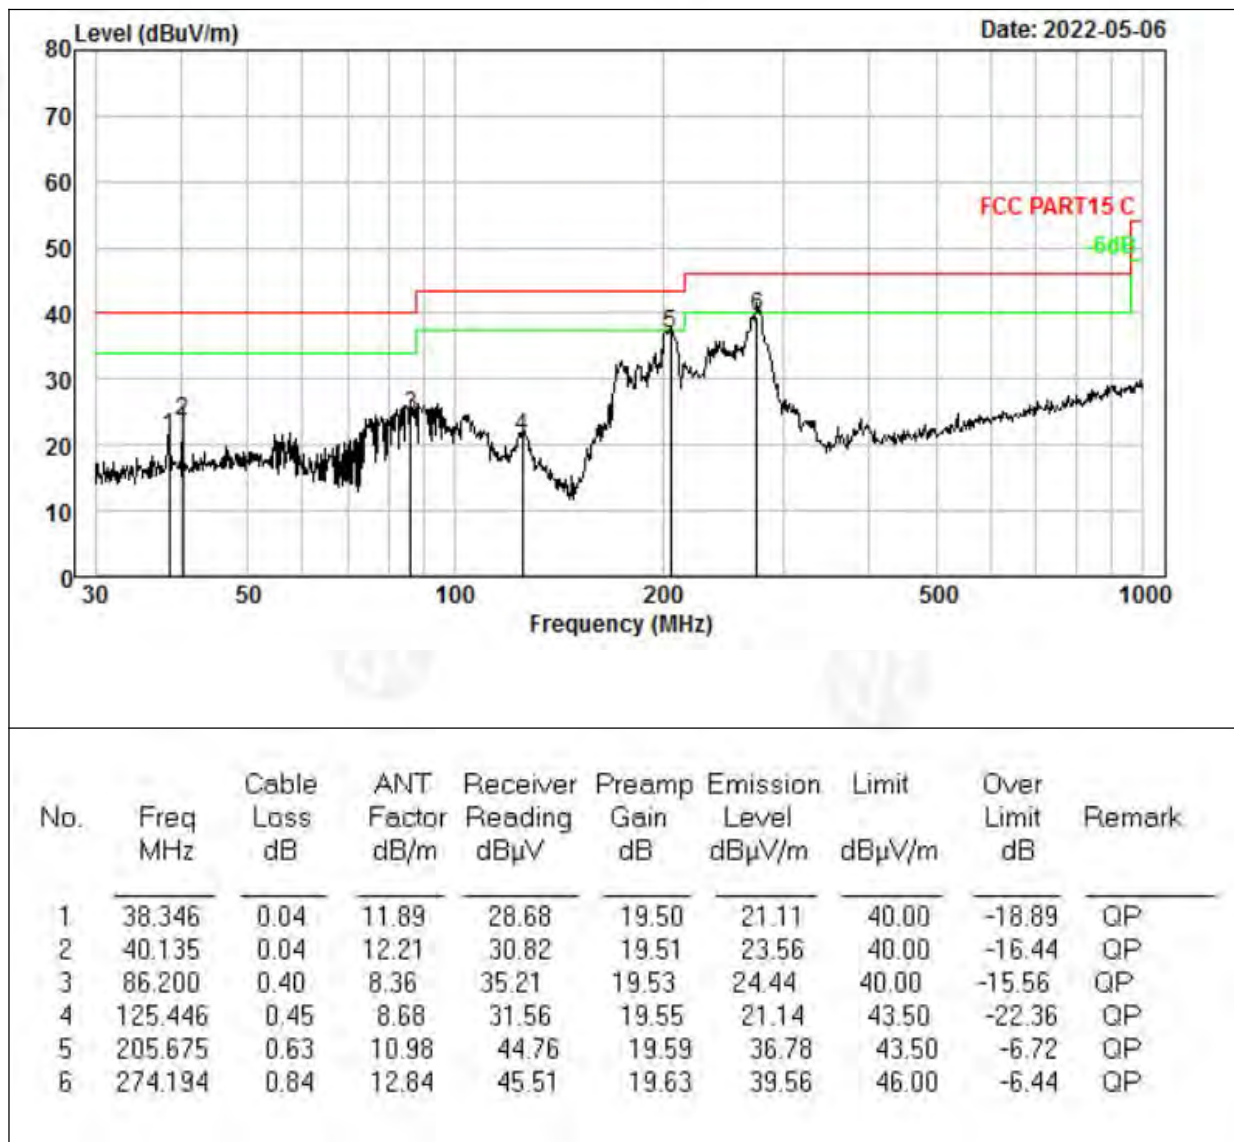



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

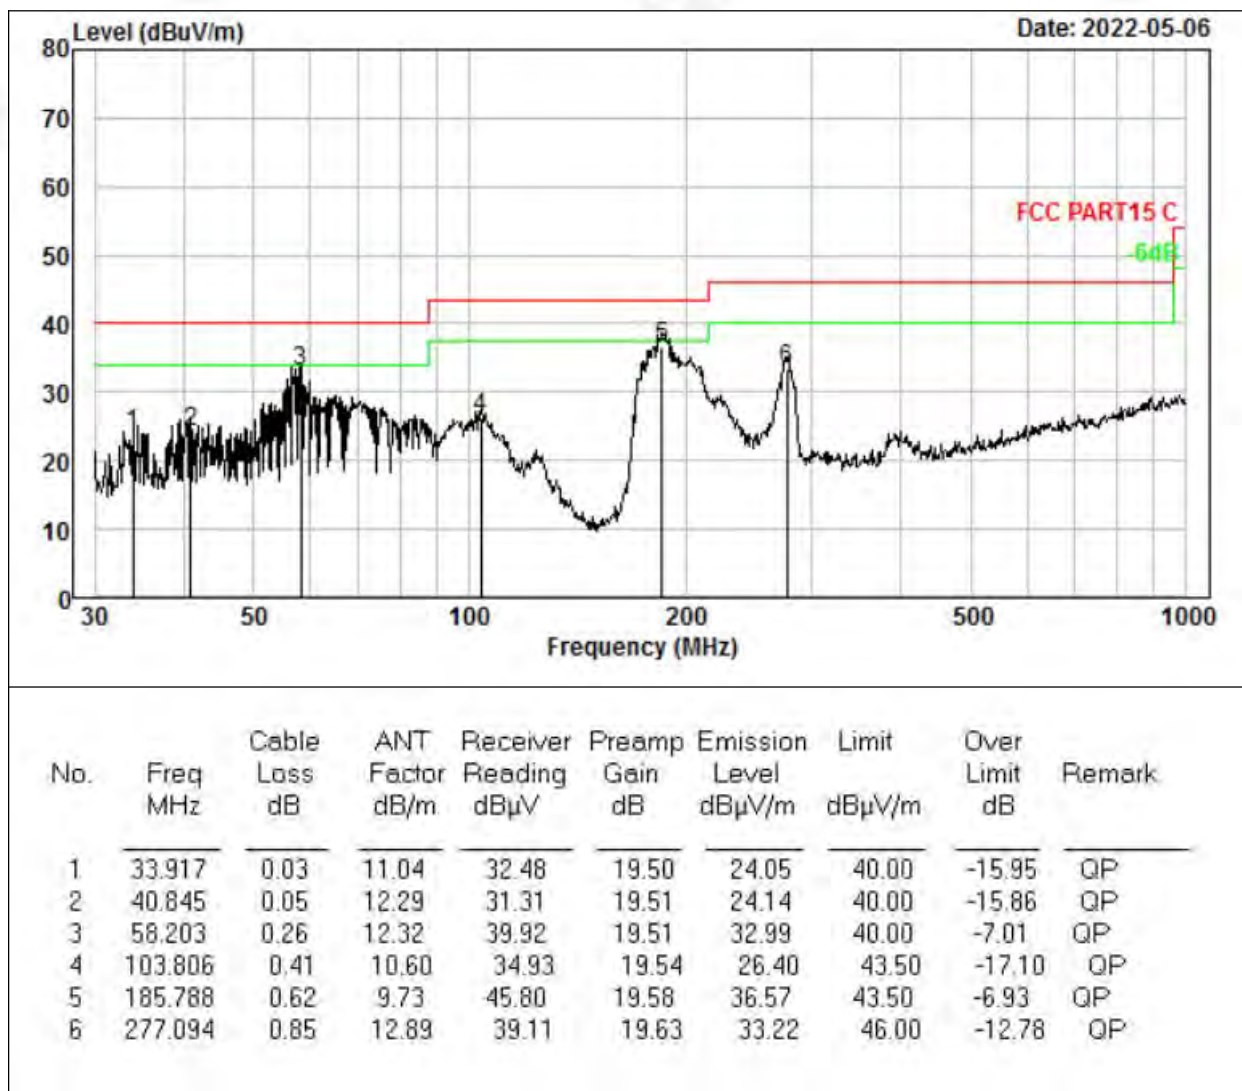

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case GFSK mode



1GHz~25GHz

GFSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	51.91	30.55	5.77	24.66	51.79	74.00	-22.21	Pk
V	4804.00	43.94	30.55	5.77	24.66	43.82	54.00	-10.18	AV
V	7206.00	51.30	30.33	6.32	24.55	51.84	74.00	-22.16	Pk
V	7206.00	43.60	30.33	6.32	24.55	44.14	54.00	-9.86	AV
V	9608.00	51.37	30.85	7.45	24.69	52.66	74.00	-21.34	Pk
V	9608.00	43.10	30.85	7.45	24.69	44.39	54.00	-9.61	AV
V	12010.00	53.56	31.02	8.99	25.57	57.10	74.00	-16.90	Pk
V	12010.00	41.26	31.02	8.99	25.57	44.80	54.00	-9.20	AV
H	4804.00	53.16	30.55	5.77	24.66	53.04	74.00	-20.96	Pk
H	4804.00	43.64	30.55	5.77	24.66	43.52	54.00	-10.48	AV
H	7206.00	51.44	30.33	6.32	24.55	51.98	74.00	-22.02	Pk
H	7206.00	43.22	30.33	6.32	24.55	43.76	54.00	-10.24	AV
H	9608.00	51.66	30.85	7.45	24.69	52.95	74.00	-21.05	Pk
H	9608.00	42.51	30.85	7.45	24.69	43.80	54.00	-10.20	AV
H	12010.00	54.00	31.02	8.99	25.57	57.54	74.00	-16.46	Pk
H	12010.00	43.96	31.02	8.99	25.57	47.50	54.00	-6.50	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2441MHz									
V	4882.00	51.46	30.55	5.77	24.66	51.34	74.00	-22.66	Pk
V	4882.00	43.90	30.55	5.77	24.66	43.78	54.00	-10.22	AV
V	7323.00	51.30	30.33	6.32	24.55	51.84	74.00	-22.16	Pk
V	7323.00	43.64	30.33	6.32	24.55	44.18	54.00	-9.82	AV
V	9764.00	51.29	30.85	7.45	24.69	52.58	74.00	-21.42	Pk
V	9764.00	42.85	30.85	7.45	24.69	44.14	54.00	-9.86	AV
V	12205.00	53.29	31.02	8.99	25.57	56.83	74.00	-17.17	Pk
V	12205.00	41.39	31.02	8.99	25.57	44.93	54.00	-9.07	AV
H	4882.00	53.37	30.55	5.77	24.66	53.25	74.00	-20.75	Pk
H	4882.00	43.79	30.55	5.77	24.66	43.67	54.00	-10.33	AV
H	7323.00	51.48	30.33	6.32	24.55	52.02	74.00	-21.98	Pk
H	7323.00	43.52	30.33	6.32	24.55	44.06	54.00	-9.94	AV
H	9764.00	52.15	30.85	7.45	24.69	53.44	74.00	-20.56	Pk
H	9764.00	42.46	30.85	7.45	24.69	43.75	54.00	-10.25	AV
H	12205.00	54.08	31.02	8.99	25.57	57.62	74.00	-16.38	Pk
H	12205.00	43.73	31.02	8.99	25.57	47.27	54.00	-6.73	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	51.86	30.55	5.77	24.66	51.74	74.00	-22.26	Pk
V	4960.00	43.77	30.55	5.77	24.66	43.65	54.00	-10.35	AV
V	7440.00	51.50	30.33	6.32	24.55	52.04	74.00	-21.96	Pk
V	7440.00	43.57	30.33	6.32	24.55	44.11	54.00	-9.89	AV
V	9920.00	51.31	30.85	7.45	24.69	52.60	74.00	-21.40	Pk
V	9920.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
V	12400.00	53.53	31.02	8.99	25.57	57.07	74.00	-16.93	Pk
V	12400.00	41.73	31.02	8.99	25.57	45.27	54.00	-8.73	AV
H	4960.00	53.40	30.55	5.77	24.66	53.28	74.00	-20.72	Pk
H	4960.00	43.46	30.55	5.77	24.66	43.34	54.00	-10.66	AV
H	7440.00	51.33	30.33	6.32	24.55	51.87	74.00	-22.13	Pk
H	7440.00	43.60	30.33	6.32	24.55	44.14	54.00	-9.86	AV
H	9920.00	51.71	30.85	7.45	24.69	53.00	74.00	-21.00	Pk
H	9920.00	42.36	30.85	7.45	24.69	43.65	54.00	-10.35	AV
H	12400.00	54.07	31.02	8.99	25.57	57.61	74.00	-16.39	Pk
H	12400.00	43.78	31.02	8.99	25.57	47.32	54.00	-6.68	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The test data shows only the worst case GFSK mode



5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

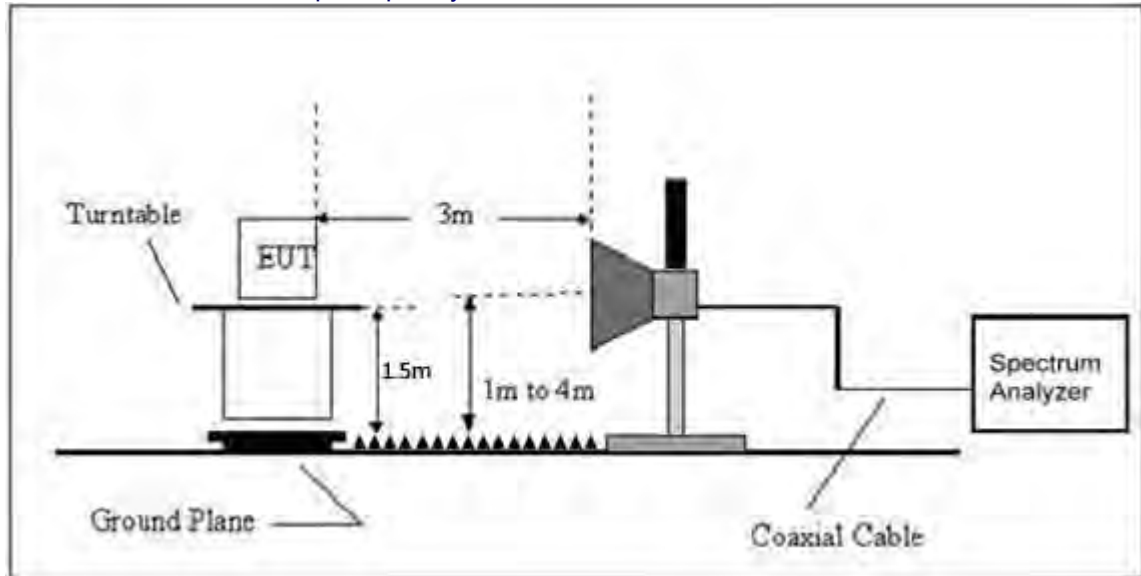

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	57.28	30.22	4.85	23.98	55.89	74.00	PK	PASS
	H	2390.00	49.31	30.22	4.85	23.98	47.92	54.00	AV	PASS
	H	2400.00	58.77	30.22	4.85	23.98	57.38	74.00	PK	PASS
	H	2400.00	49.91	30.22	4.85	23.98	48.52	54.00	AV	PASS
	V	2390.00	58.33	30.22	4.85	23.98	56.94	74.00	PK	PASS
	V	2390.00	49.62	30.22	4.85	23.98	48.23	54.00	AV	PASS
	V	2400.00	58.48	30.22	4.85	23.98	57.09	74.00	PK	PASS
	V	2400.00	49.89	30.22	4.85	23.98	48.50	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	56.82	30.22	4.85	23.98	55.43	74.00	PK	PASS
	H	2483.50	45.32	30.22	4.85	23.98	43.93	54.00	AV	PASS
	H	2500.00	53.59	30.22	4.85	23.98	52.20	74.00	PK	PASS
	H	2500.00	43.67	30.22	4.85	23.98	42.28	54.00	AV	PASS
	V	2483.50	51.54	30.22	4.85	23.98	50.15	74.00	PK	PASS
	V	2483.50	39.79	30.22	4.85	23.98	38.40	54.00	AV	PASS
$\pi/4$ -DQPSK	Low Channel: 2402MHz									
	H	2390.00	56.73	30.22	4.85	23.98	55.34	74.00	PK	PASS
	H	2390.00	49.82	30.22	4.85	23.98	48.43	54.00	AV	PASS
	H	2400.00	58.39	30.22	4.85	23.98	57.00	74.00	PK	PASS
	H	2400.00	49.41	30.22	4.85	23.98	48.02	54.00	AV	PASS
	V	2390.00	58.38	30.22	4.85	23.98	56.99	74.00	PK	PASS
	V	2390.00	49.46	30.22	4.85	23.98	48.07	54.00	AV	PASS
	V	2400.00	58.86	30.22	4.85	23.98	57.47	74.00	PK	PASS
	V	2400.00	49.52	30.22	4.85	23.98	48.13	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	57.69	30.22	4.85	23.98	56.3	74.00	PK	PASS
	H	2483.50	49.84	30.22	4.85	23.98	48.45	54.00	AV	PASS
	H	2500.00	58.81	30.22	4.85	23.98	57.42	74.00	PK	PASS
	H	2500.00	49.67	30.22	4.85	23.98	48.28	54.00	AV	PASS
	V	2483.50	58.20	30.22	4.85	23.98	56.81	74.00	PK	PASS
	V	2483.50	49.47	30.22	4.85	23.98	48.08	54.00	AV	PASS
8-DPSK	Low Channel: 2402MHz									
	H	2390.00	56.68	30.22	4.85	23.98	55.29	74.00	PK	PASS
	H	2390.00	49.87	30.22	4.85	23.98	48.48	54.00	AV	PASS
	H	2400.00	58.26	30.22	4.85	23.98	56.87	74.00	PK	PASS
	H	2400.00	49.56	30.22	4.85	23.98	48.17	54.00	AV	PASS
	V	2390.00	58.58	30.22	4.85	23.98	57.19	74.00	PK	PASS
	V	2390.00	49.71	30.22	4.85	23.98	48.32	54.00	AV	PASS
	V	2400.00	58.84	30.22	4.85	23.98	57.45	74.00	PK	PASS
	V	2400.00	49.58	30.22	4.85	23.98	48.19	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	57.32	30.22	4.85	23.98	55.93	74.00	PK	PASS
	H	2483.50	49.31	30.22	4.85	23.98	47.92	54.00	AV	PASS
	H	2500.00	58.80	30.22	4.85	23.98	57.41	74.00	PK	PASS
	H	2500.00	49.75	30.22	4.85	23.98	48.36	54.00	AV	PASS
	V	2483.50	57.95	30.22	4.85	23.98	56.56	74.00	PK	PASS



	V	2483.50	49.11	30.22	4.85	23.98	47.72	54.00	AV	PASS
	V	2500.00	58.81	30.22	4.85	23.98	57.42	74.00	PK	PASS
	V	2500.00	49.79	30.22	4.85	23.98	48.40	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D01 15.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup



6.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

6.4 DEVIATION FROM STANDARD

No deviation.



6.5 Test Result

GFSK mode:


Test channel:	Lowest channel
---------------	----------------

30MHz~25GHz



Test channel:	Middle channel
---------------	----------------


30MHz~25GHz

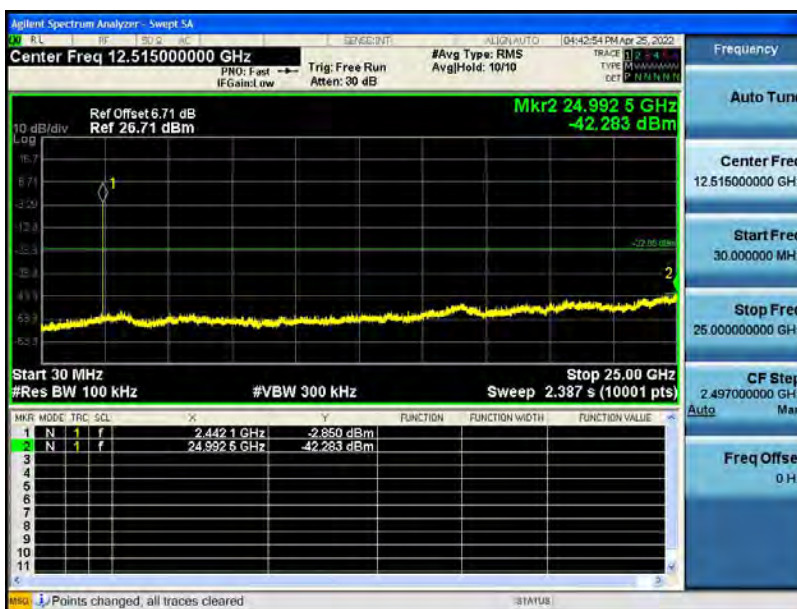



Test channel:	Highest channel
---------------	-----------------

30MHz~25GHz

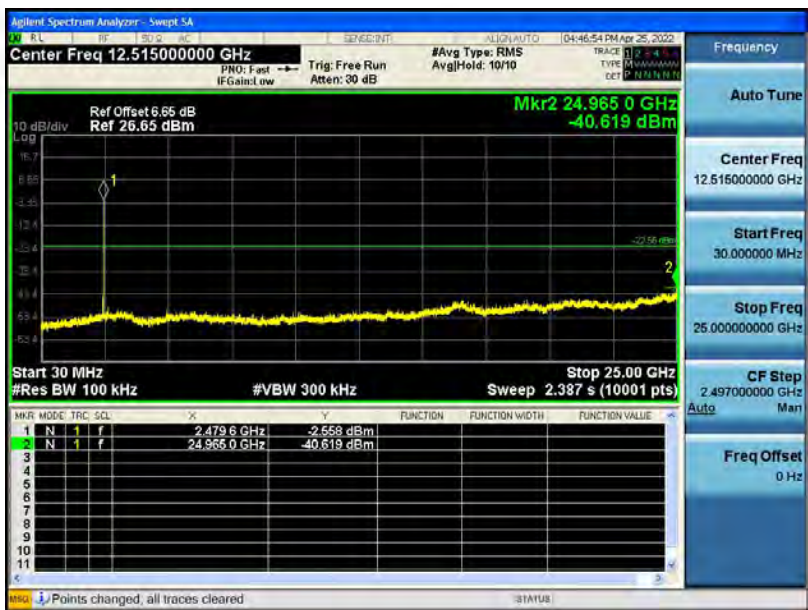




$\pi/4$ -DQPSK mode:

Test channel:	Lowest channel
---------------	----------------

30MHz~25GHz

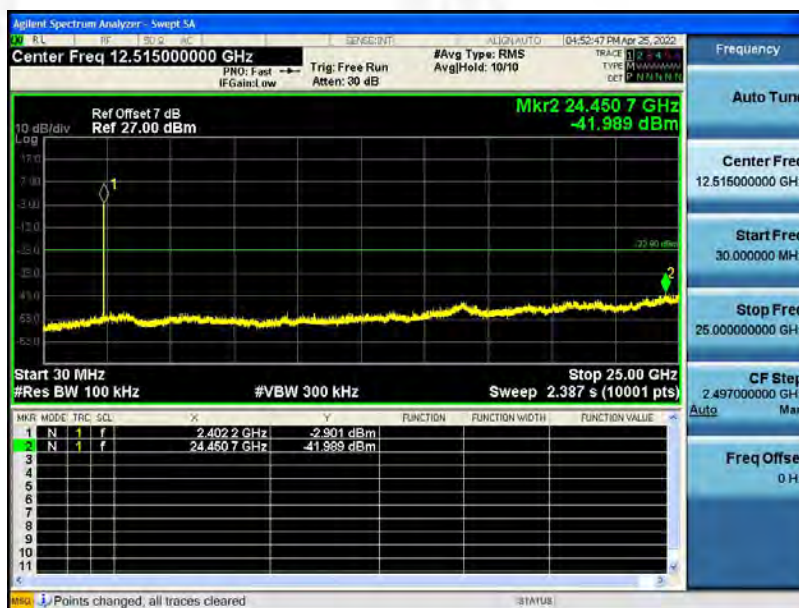

Test channel:	Middle channel
---------------	----------------


30MHz~25GHz





Test channel:	Highest channel
---------------	-----------------

30MHz~25GHz

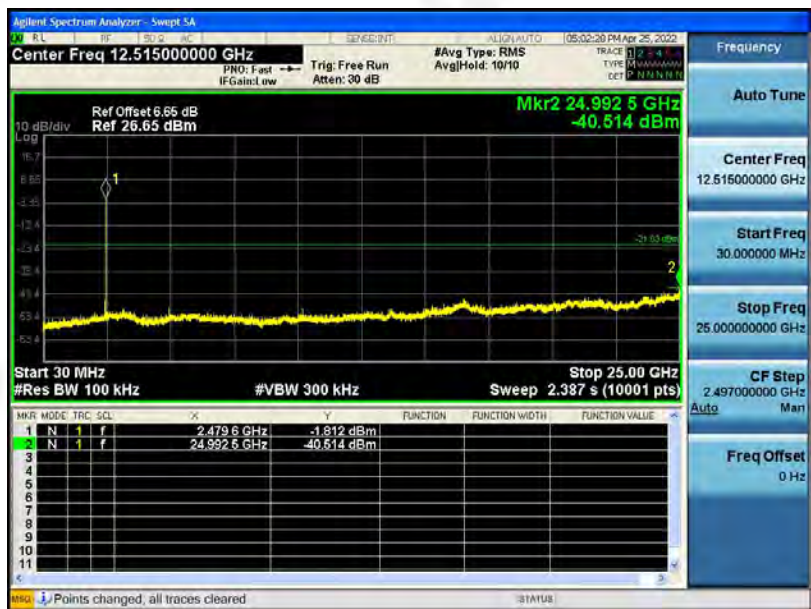




8-DPSK mode:


Test channel:	Lowest channel
---------------	----------------

30MHz~25GHz

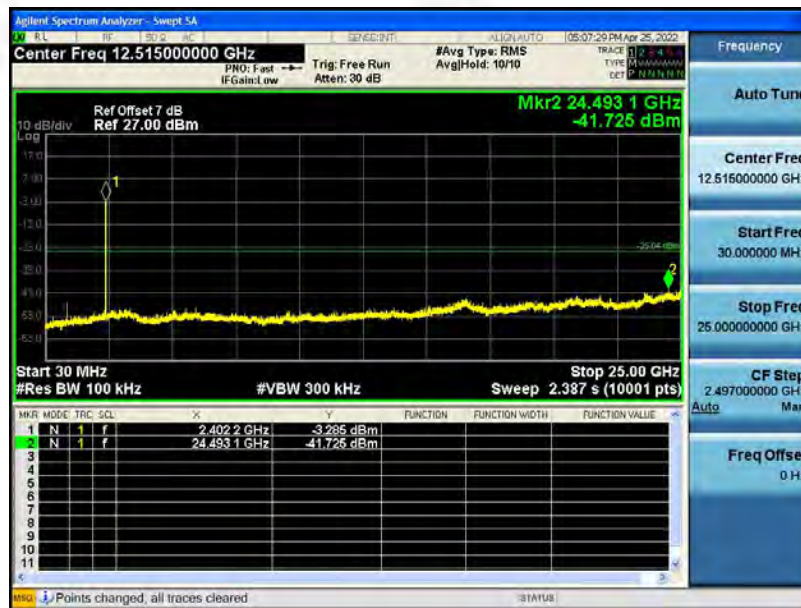

Test channel:	Middle channel
---------------	----------------


30MHz~25GHz

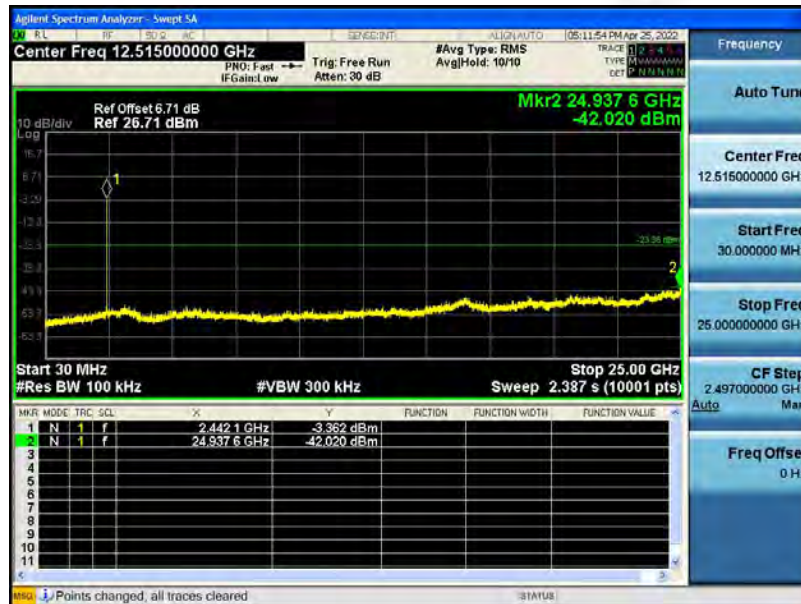




Test channel:	Highest channel
---------------	-----------------

30MHz~25GHz

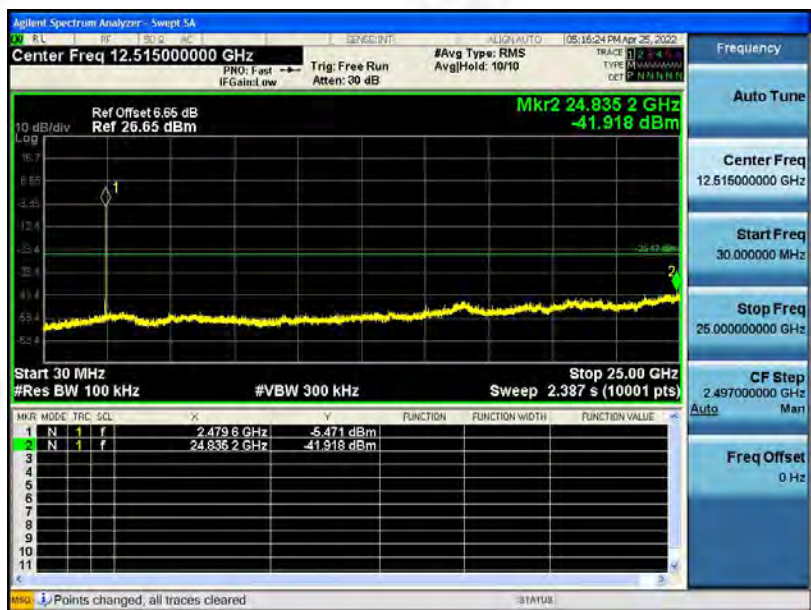




GFSK No-hopping Band edge-left side

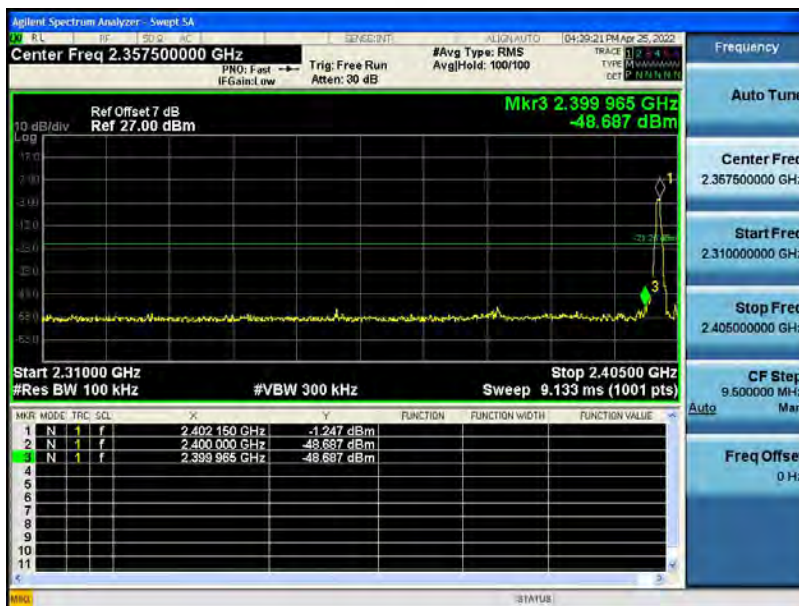


GFSK Hopping Band edge-left side

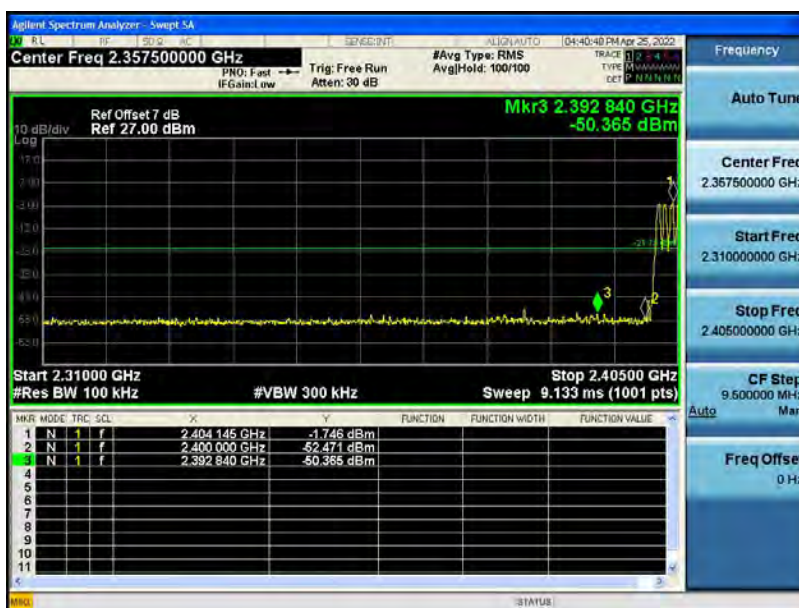




GFSK No-hopping Band edge-right side

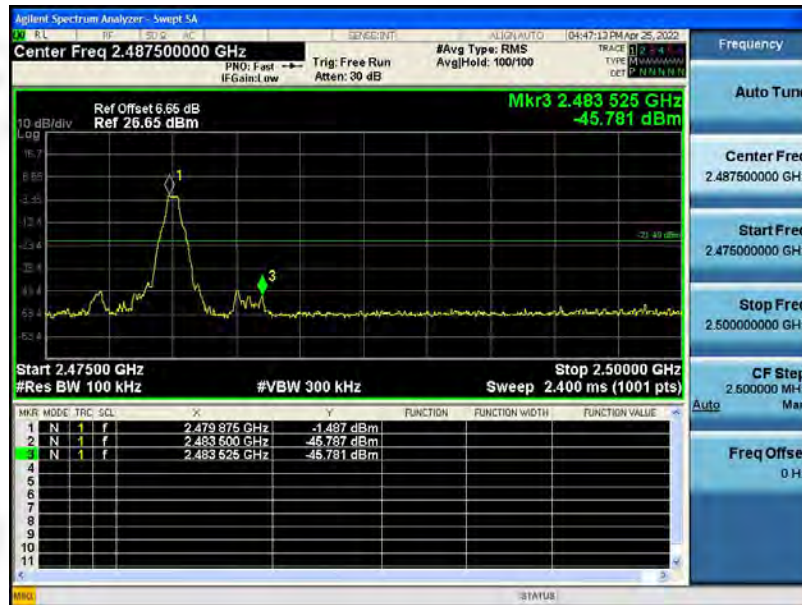


GFSK Hopping Band edge-right side

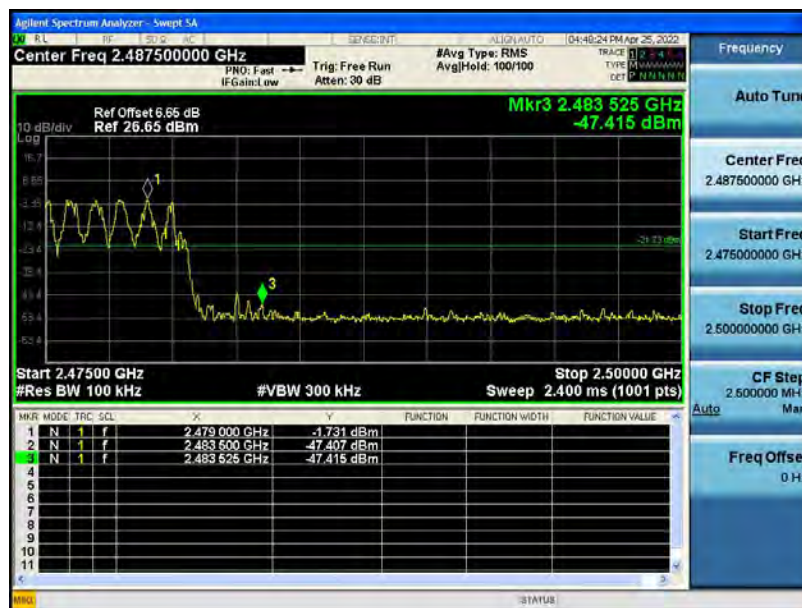




$\pi/4$ -DQPSK No-hopping Band edge-left side

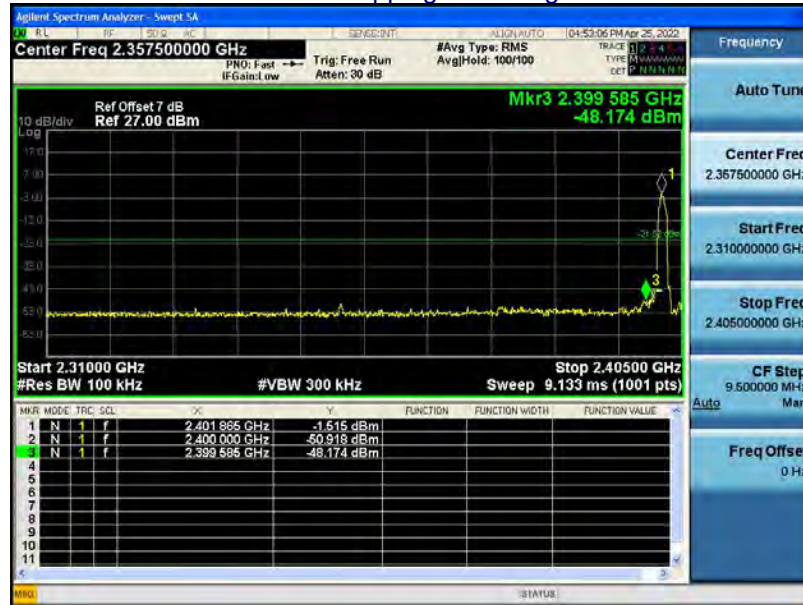


$\pi/4$ -DQPSK Hopping Band edge-left side

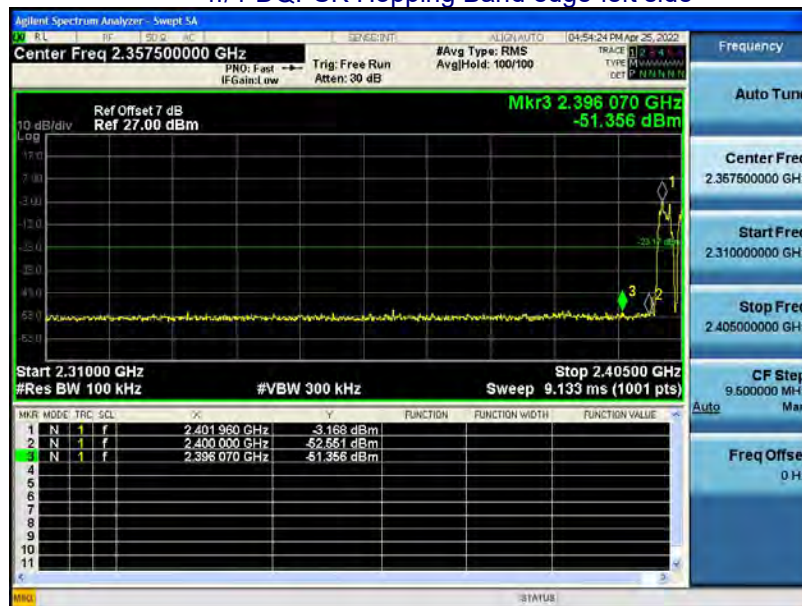



$\pi/4$ -DQPSK No-hopping Band edge-right side

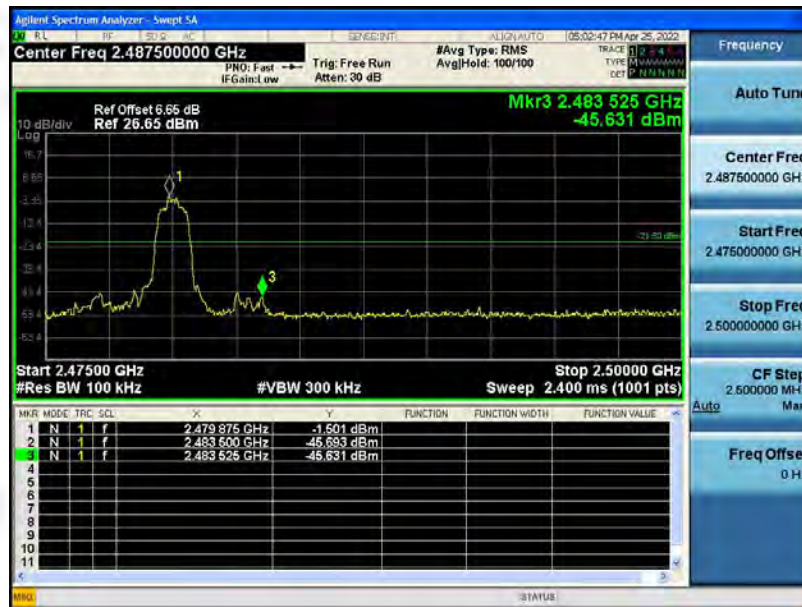


$\pi/4$ -DQPSK Hopping Band edge-right side






8-DPSK No-hopping Band edge-left side

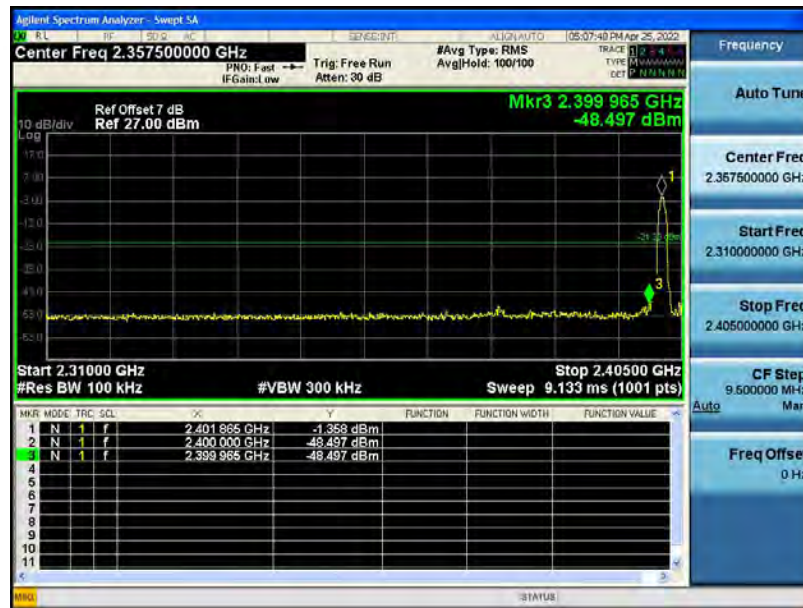

8-DPSK Hopping Band edge-left side

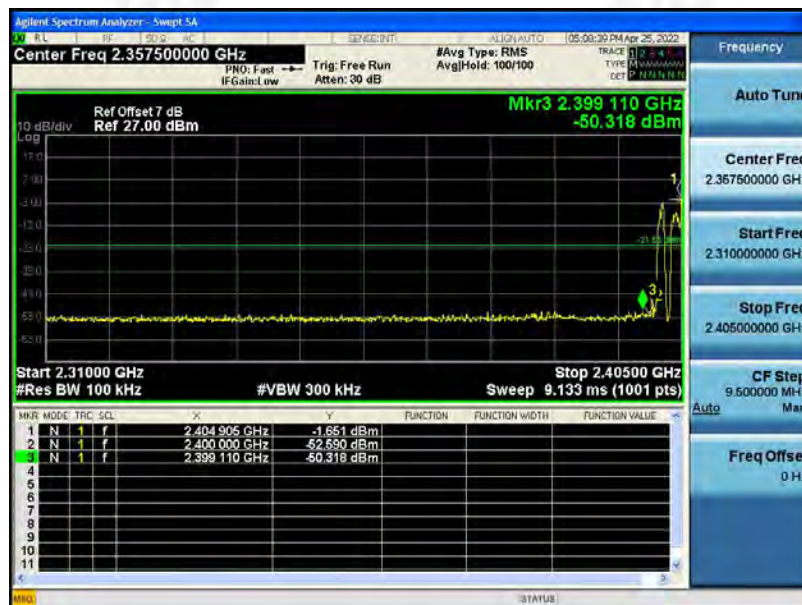




8-DPSK No-hopping Band edge-right side



8-DPSK Hopping Band edge-right side

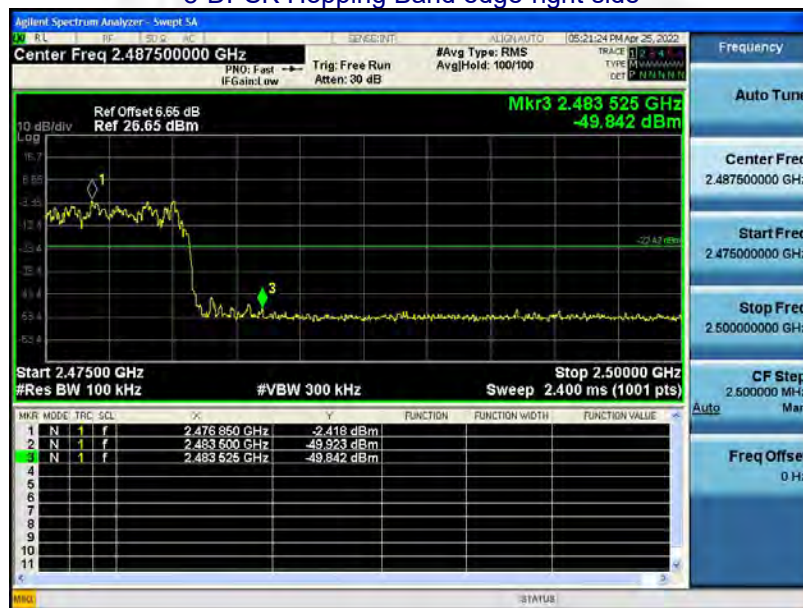



7. 20DB&99% BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

7.1 Test Setup



7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.

7.5 Test Result

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.8811	Pass
	Middle	0.8794	
	Highest	0.8791	
$\pi/4$ -DQPSK	Lowest	1.257	Pass
	Middle	1.254	
	Highest	1.257	
8-DPSK	Lowest	1.221	Pass
	Middle	1.223	
	Highest	1.223	



Test plots

GFSK Low Channel





GFSK Middle Channel



GFSK High Channel





$\pi/4$ -DQPSK Low Channel



$\pi/4$ -DQPSK Middle Channel





$\pi/4$ -DQPSK High Channel





Agilent Spectrum Analyzer - Occupied BW

RF F1 F2 F3 F4 F5 F6 F7 F8 F9 F10 F11 F12 F13 F14 F15 F16 F17 F18 F19 F20 F21 F22 F23 F24 F25 F26 F27 F28 F29 F30 F31 F32 F33 F34 F35 F36 F37 F38 F39 F40 F41 F42 F43 F44 F45 F46 F47 F48 F49 F50 F51 F52 F53 F54 F55 F56 F57 F58 F59 F60 F61 F62 F63 F64 F65 F66 F67 F68 F69 F70 F71 F72 F73 F74 F75 F76 F77 F78 F79 F80 F81 F82 F83 F84 F85 F86 F87 F88 F89 F90 F91 F92 F93 F94 F95 F96 F97 F98 F99 F100 F101 F102 F103 F104 F105 F106 F107 F108 F109 F110 F111 F112 F113 F114 F115 F116 F117 F118 F119 F120 F121 F122 F123 F124 F125 F126 F127 F128 F129 F130 F131 F132 F133 F134 F135 F136 F137 F138 F139 F140 F141 F142 F143 F144 F145 F146 F147 F148 F149 F150 F151 F152 F153 F154 F155 F156 F157 F158 F159 F160 F161 F162 F163 F164 F165 F166 F167 F168 F169 F170 F171 F172 F173 F174 F175 F176 F177 F178 F179 F180 F181 F182 F183 F184 F185 F186 F187 F188 F189 F190 F191 F192 F193 F194 F195 F196 F197 F198 F199 F200 F201 F202 F203 F204 F205 F206 F207 F208 F209 F210 F211 F212 F213 F214 F215 F216 F217 F218 F219 F220 F221 F222 F223 F224 F225 F226 F227 F228 F229 F230 F231 F232 F233 F234 F235 F236 F237 F238 F239 F240 F241 F242 F243 F244 F245 F246 F247 F248 F249 F250 F251 F252 F253 F254 F255 F256 F257 F258 F259 F260 F261 F262 F263 F264 F265 F266 F267 F268 F269 F270 F271 F272 F273 F274 F275 F276 F277 F278 F279 F280 F281 F282 F283 F284 F285 F286 F287 F288 F289 F290 F291 F292 F293 F294 F295 F296 F297 F298 F299 F300 F301 F302 F303 F304 F305 F306 F307 F308 F309 F310 F311 F312 F313 F314 F315 F316 F317 F318 F319 F320 F321 F322 F323 F324 F325 F326 F327 F328 F329 F330 F331 F332 F333 F334 F335 F336 F337 F338 F339 F340 F341 F342 F343 F344 F345 F346 F347 F348 F349 F350 F351 F352 F353 F354 F355 F356 F357 F358 F359 F360 F361 F362 F363 F364 F365 F366 F367 F368 F369 F370 F371 F372 F373 F374 F375 F376 F377 F378 F379 F380 F381 F382 F383 F384 F385 F386 F387 F388 F389 F390 F391 F392 F393 F394 F395 F396 F397 F398 F399 F400 F401 F402 F403 F404 F405 F406 F407 F408 F409 F410 F411 F412 F413 F414 F415 F416 F417 F418 F419 F420 F421 F422 F423 F424 F425 F426 F427 F428 F429 F430 F431 F432 F433 F434 F435 F436 F437 F438 F439 F440 F441 F442 F443 F444 F445 F446 F447 F448 F449 F450 F451 F452 F453 F454 F455 F456 F457 F458 F459 F460 F461 F462 F463 F464 F465 F466 F467 F468 F469 F470 F471 F472 F473 F474 F475 F476 F477 F478 F479 F480 F481 F482 F483 F484 F485 F486 F487 F488 F489 F490 F491 F492 F493 F494 F495 F496 F497 F498 F499 F500 F501 F502 F503 F504 F505 F506 F507 F508 F509 F510 F511 F512 F513 F514 F515 F516 F517 F518 F519 F520 F521 F522 F523 F524 F525 F526 F527 F528 F529 F530 F531 F532 F533 F534 F535 F536 F537 F538 F539 F540 F541 F542 F543 F544 F545 F546 F547 F548 F549 F550 F551 F552 F553 F554 F555 F556 F557 F558 F559 F560 F561 F562 F563 F564 F565 F566 F567 F568 F569 F570 F571 F572 F573 F574 F575 F576 F577 F578 F579 F580 F581 F582 F583 F584 F585 F586 F587 F588 F589 F590 F591 F592 F593 F594 F595 F596 F597 F598 F599 F600 F601 F602 F603 F604 F605 F606 F607 F608 F609 F610 F611 F612 F613 F614 F615 F616 F617 F618 F619 F620 F621 F622 F623 F624 F625 F626 F627 F628 F629 F630 F631 F632 F633 F634 F635 F636 F637 F638 F639 F640 F641 F642 F643 F644 F645 F646 F647 F648 F649 F650 F651 F652 F653 F654 F655 F656 F657 F658 F659 F660 F661 F662 F663 F664 F665 F666 F667 F668 F669 F670 F671 F672 F673 F674 F675 F676 F677 F678 F679 F680 F681 F682 F683 F684 F685 F686 F687 F688 F689 F690 F691 F692 F693 F694 F695 F696 F697 F698 F699 F700 F701 F702 F703 F704 F705 F706 F707 F708 F709 F710 F711 F712 F713 F714 F715 F716 F717 F718 F719 F720 F721 F722 F723 F724 F725 F726 F727 F728 F729 F730 F731 F732 F733 F734 F735 F736 F737 F738 F739 F740 F741 F742 F743 F744 F745 F746 F747 F748 F749 F750 F751 F752 F753 F754 F755 F756 F757 F758 F759 F760 F761 F762 F763 F764 F765 F766 F767 F768 F769 F770 F771 F772 F773 F774 F775 F776 F777 F778 F779 F780 F781 F782 F783 F784 F785 F786 F787 F788 F789 F790 F791 F792 F793 F794 F795 F796 F797 F798 F799 F800 F801 F802 F803 F804 F805 F806 F807 F808 F809 F810 F811 F812 F813 F814 F815 F816 F817 F818 F819 F820 F821 F822 F823 F824 F825 F826 F827 F828 F829 F830 F831 F832 F833 F834 F835 F836 F837 F838 F839 F840 F841 F842 F843 F844 F845 F846 F847 F848 F849 F850 F851 F852 F853 F854 F855 F856 F857 F858 F859 F860 F861 F862 F863 F864 F865 F866 F867 F868 F869 F870 F871 F872 F873 F874 F875 F876 F877 F878 F879 F880 F881 F882 F883 F884 F885 F886 F887 F888 F889 F890 F891 F892 F893 F894 F895 F896 F897 F898 F899 F900 F901 F902 F903 F904 F905 F906 F907 F908 F909 F910 F911 F912 F913 F914 F915 F916 F917 F918 F919 F920 F921 F922 F923 F924 F925 F926 F927 F928 F929 F930 F931 F932 F933 F934 F935 F936 F937 F938 F939 F940 F941 F942 F943 F944 F945 F946 F947 F948 F949 F950 F951 F952 F953 F954 F955 F956 F957 F958 F959 F960 F961 F962 F963 F964 F965 F966 F967 F968 F969 F970 F971 F972 F973 F974 F975 F976 F977 F978 F979 F980 F981 F982 F983 F984 F985 F986 F987 F988 F989 F990 F991 F992 F993 F994 F995 F996 F997 F998 F999 F1000 F1001 F1002 F1003 F1004 F1005 F1006 F1007 F1008 F1009 F1010 F1011 F1012 F1013 F1014 F1015 F1016 F1017 F1018 F1019 F1020 F1021 F1022 F1023 F1024 F1025 F1026 F1027 F1028 F1029 F1030 F1031 F1032 F



8-DPSK Middle Channel



8-DPSK High Channel





8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	30dBm(for GFSK), 20.97dBm(for EDR)

8.1 Block Diagram Of Test Setup



8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW =6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD

No deviation.

8.5 Test Result

Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	-1.237	30.00	Pass
	Middle	-1.245		
	Highest	-1.461		
$\pi/4$ -DQPSK	Lowest	-0.289	21.00	Pass
	Middle	-0.274		
	Highest	-0.467		
8-DPSK	Lowest	0.360	21.00	Pass
	Middle	0.321		
	Highest	0.117		



Test plots

GFSK Low Channel



GFSK Middle Channel





GFSK High Channel



$\pi/4$ -DQPSK Low Channel





$\pi/4$ -DQPSK Middle Channel



$\pi/4$ -DQPSK High Channel





8-DPSK Low Channel




8-DPSK Middle Channel





8-DPSK High Channel

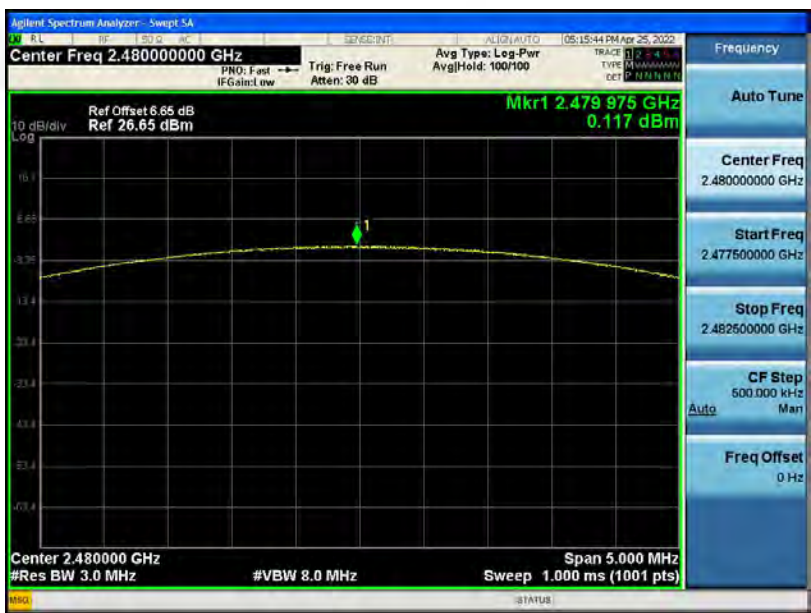



9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	GFSK & $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup



9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.



9.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.017	0.8811	PASS
GFSK	Middle	1.008	0.8794	PASS
GFSK	High	0.987	0.8791	PASS
$\pi/4$ -DQPSK	Low	0.981	0.838	PASS
$\pi/4$ -DQPSK	Middle	1.002	0.836	PASS
$\pi/4$ -DQPSK	High	1.116	0.838	PASS
8-DPSK	Low	0.972	0.814	PASS
8-DPSK	Middle	0.999	0.815	PASS
8-DPSK	High	0.993	0.815	PASS

Test plots

GFSK Low Channel





GFSK Middle Channel



GFSK High Channel





$\pi/4$ -DQPSK Low Channel



$\pi/4$ -DQPSK Middle Channel





$\pi/4$ -DQPSK High Channel



8-DPSK Low Channel






8-DPSK Middle Channel



8-DPSK High Channel

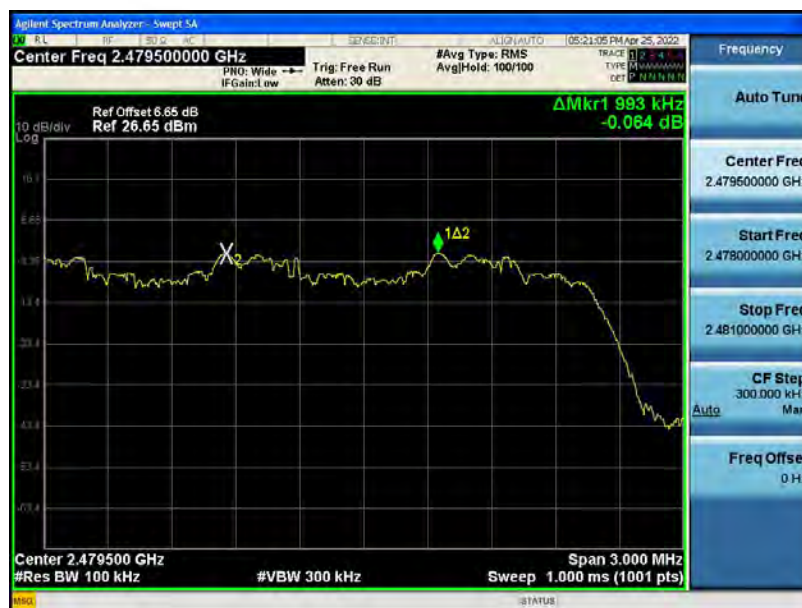

10.NUMBER OF HOPPING FREQUENCY

Test Requirement:

FCC Part15 C Section 15.247 (a)(1)(iii)

Shenzhen ZKT Technology Co., Ltd.

1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

+86-400-000-9970

+86-755-2233 6688

zkt@zkt-lab.com

www.zkt-lab.com



Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup



10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 Test Result

Test Plots:
79 Channels in total
GFSK





$\pi/4$ -DQPSK



8-DPSK





11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup



11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.



11.4 Test Result

GFSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1	124.80	400	Pass
2441MHz	DH3	265.60	400	Pass
2441MHz	DH5	309.33	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $0.39(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6$ CH:2441MHz time slot= $1.66(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6$ CH:2441MHz time slot= $2.90(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6$ $\pi/4$ -DQPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	2DH1	131.20	400	Pass
2441MHz	2DH3	265.60	400	Pass
2441MHz	2DH5	308.27	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $0.41(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6$ CH:2441MHz time slot= $1.66(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6$ CH:2441MHz time slot= $2.89(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6$

8-DPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	3DH1	134.40	400	Pass
2441MHz	3DH3	264.00	400	Pass
2441MHz	3DH5	310.40	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$


Test channel: as blow

CH:2441MHz time slot= $0.42(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6$ CH:2441MHz time slot= $1.65(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6$ CH:2441MHz time slot= $2.91(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6$




Test Plots

GFSK DH1 2441MHz

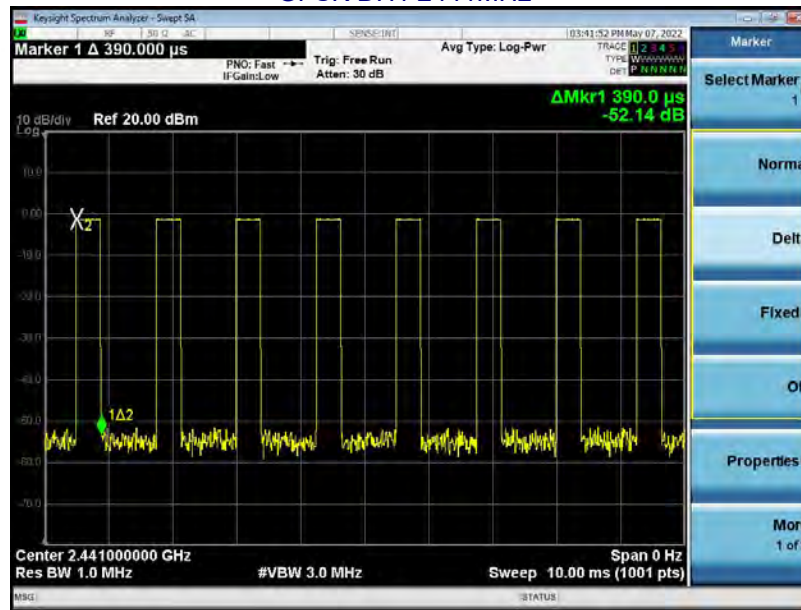


GFSK DH3 2441MHz

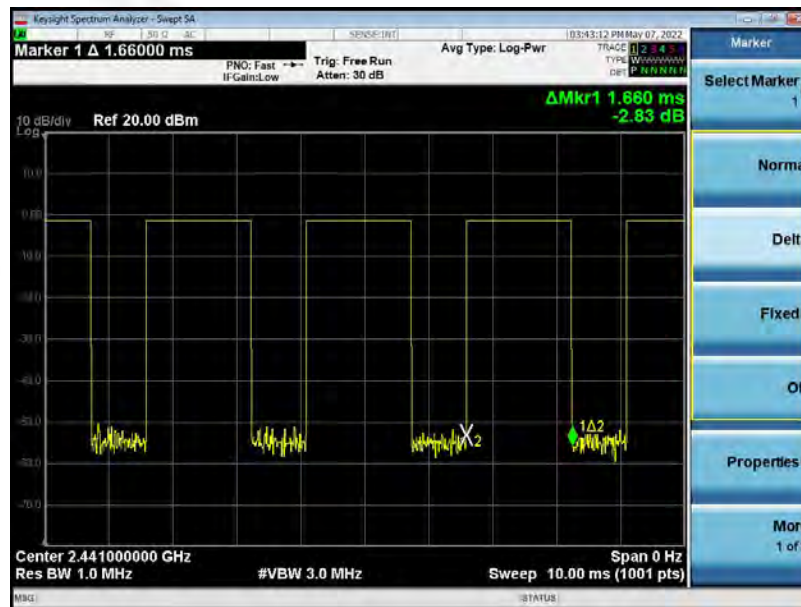




GFSK DH5 2441MHz

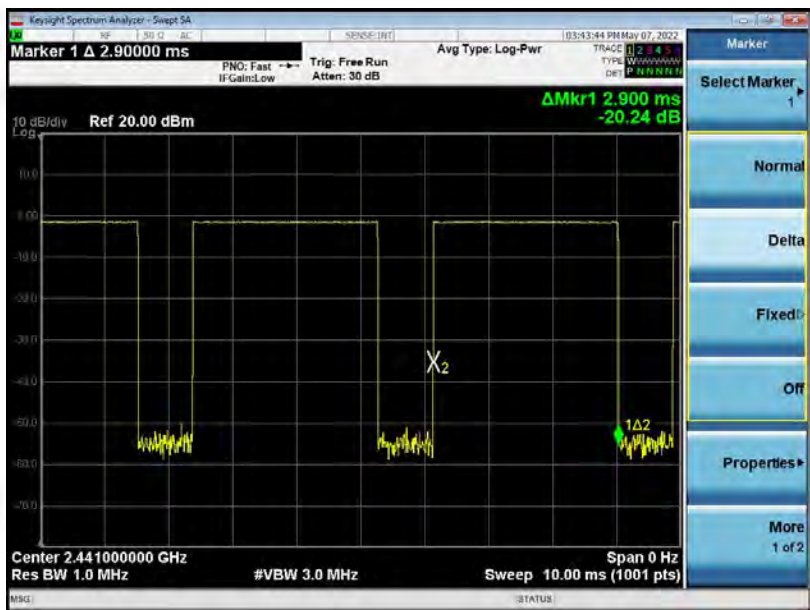


$\pi/4$ -DQPSK 2DH1 2441MHz

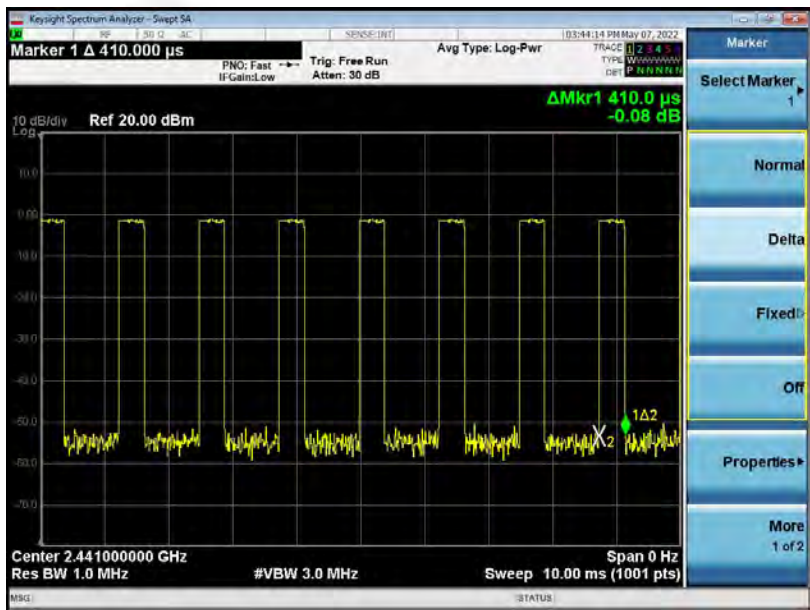




$\pi/4$ -DQPSK 2DH3 2441MHz

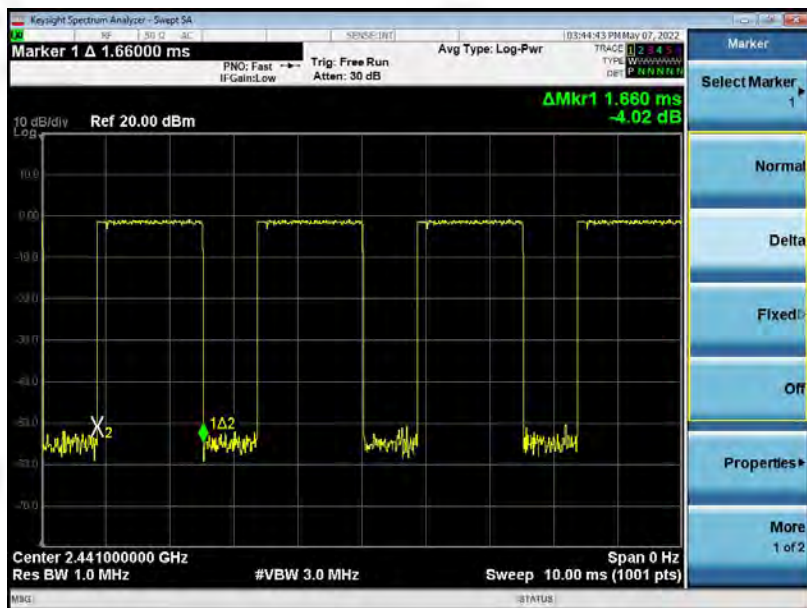


$\pi/4$ -DQPSK 2DH5 2441MHz

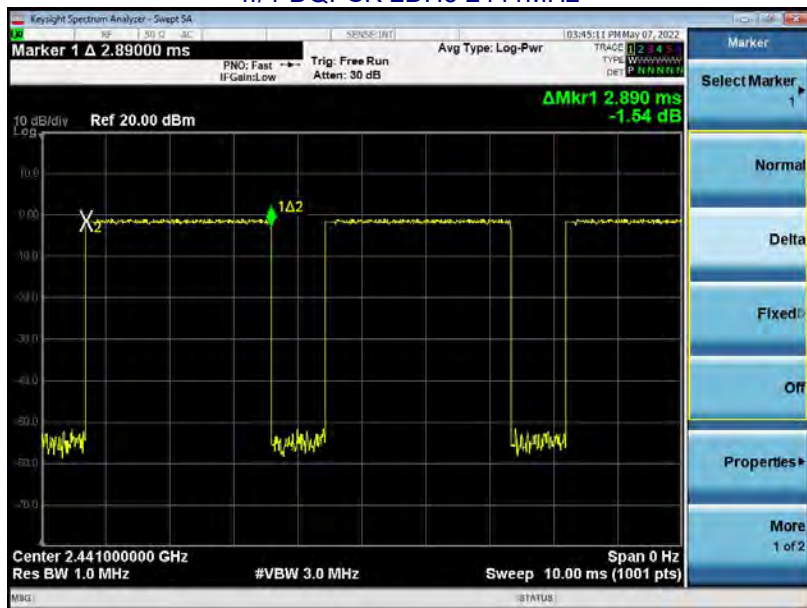




8-DPSK 3DH1 2441MHz

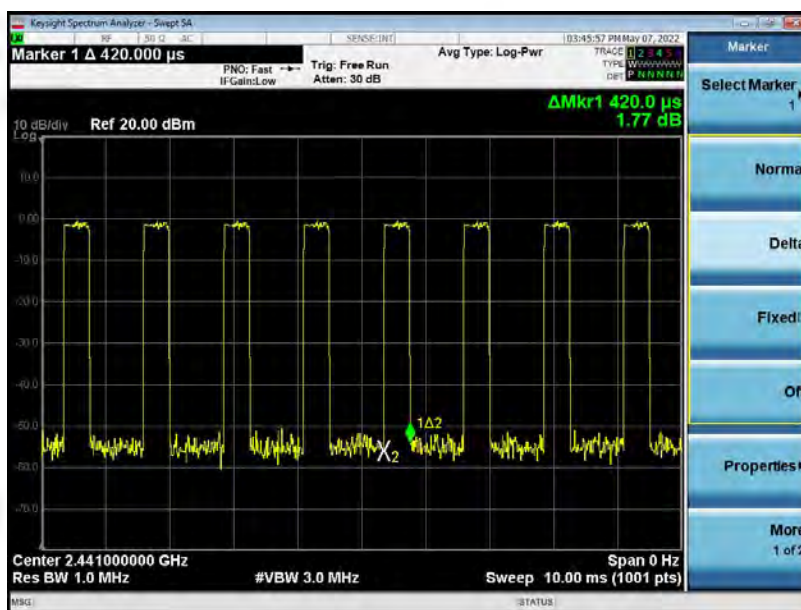


8-DPSK 3DH3 2441MHz

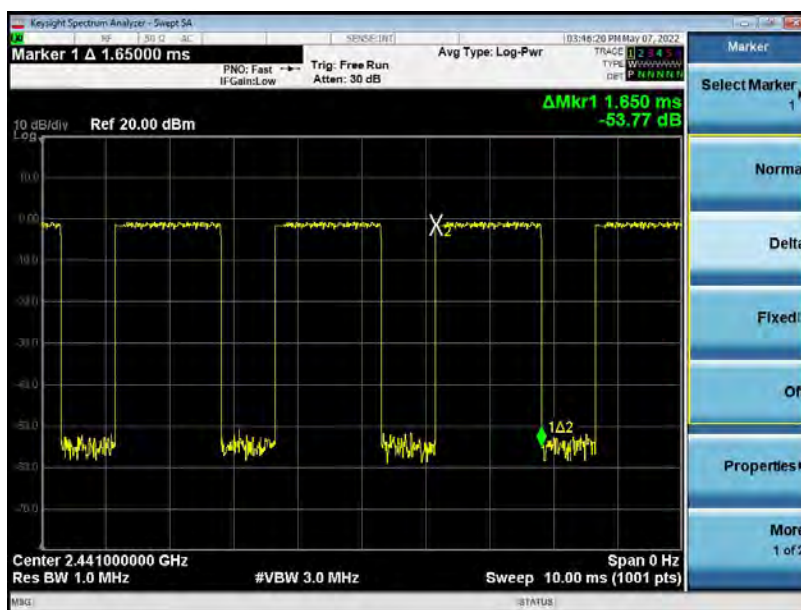



8-DPSK 3DH5 2441MHz

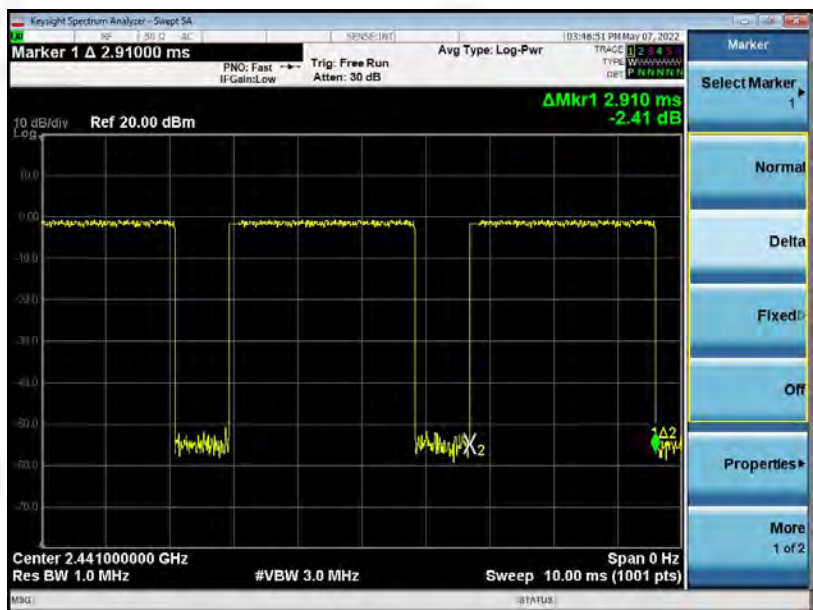



12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is Internal Antenna, the best case gain of the antennas is 0 dBi, reference to the appendix II for details	



13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

***** END OF REPORT *****