TEST REPORT

CERTIFICATE OF CONFORMITY

Standard:	**47 CFR FCC Part 15, Subpart E (Section 15.407)**
Report No.:	RFBBQZ-WTW-P25100602-3
FCC ID:	PY325100647
Product:	BE5000 Dual-Band PoE 2.5G Insight Managed WiFi 7 Outdoor Access Point
Brand:	NETGEAR
Model No.:	WBE700Y
Series Model:	WBE708Y (refer to item 3.1 for more details)
Received Date:	2025/11/15
Test Date:	2026/7/1 ~ 2026/7/12
Issued Date:	2026/7/22
Applicant and Manufacturer:	NETGEAR, INC.
Address:	3553 N. First St., San Jose, California 95134, United States
Issued By:	Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Lin Kou Laboratories
Lab Address:	No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City 244, Taiwan
Test Location:	No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 333, Taiwan
FCC Registration / Designation Number:	788550 / TW0003

Approved by: Jeremy Lin , **Date:** 2026/7/22

Jeremy Lin / Project Engineer

This test report consists of 351 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Vera Huang / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/ and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record 3

1 Certificate 4

2 Summary of Test Results 5

2.1 Supplementary Information 5

3 General Information 6

3.1 General Description of EUT 6
3.2 Antenna Description of EUT 7
3.3 EUT Power Level 9

4 Test Instruments 10

4.1 Channel Availability Check Time 10
4.2 Channel Closing Transmission and Channel Move Time 10
4.3 Non-Occupancy Period 10
4.4 Non-Associated Test 10

5 Limits of Test Items 11

5.1 Working Modes and Required Test Items 11
5.2 Test Limits and Radar Signal Parameters 12

6 Test Arrangements 15

6.1 Test Setup 15
6.2 Test Procedure 17
6.2.1 DFS Measurement System 17
6.2.2 Calibration of DFS Detection Threshold Level 24
6.2.3 DFS Detection Threshold 25
6.2.4 DFS Companion Device 37

7 Test Results of Test Item 38

7.1 U-NII Detection Bandwidth 38
7.2 Channel Availability Check Time 54
7.3 Channel Closing Transmission and Channel Move Time 58
7.4 Non-Occupancy Period 70
7.5 Statistical Performance Check 78
7.6 Non-Associated Test 152

8 Declaration of Conformity by the Manufacturer 153

8.1 Transmit Power Control (TPC) 153
8.2 Statement of Manufacturer 153

9 Pictures of Test Arrangements 154

10 Information of the Testing Laboratories 155

11 Appendix 156

11.1 Radar Test Signal 156
11.2 Radar Test Signal 254

Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P25100602-3	Original Release	2026/7/22

1 Certificate

Product:	BE5000 Dual-Band PoE 2.5G Insight Managed WiFi 7 Outdoor Access Point
Brand:	NETGEAR
Test Model:	WBE700Y
Series Model:	WBE708Y (refer to item 3.1 for more details)
Sample Status:	Engineering sample
Applicant and Manufacturer:	NETGEAR, INC.
Test Date:	2026/7/1 ~ 2026/7/12
Standard:	47 CFR FCC Part 15, Subpart E (Section 15.407)
Measurement procedure:	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(h)	U-NII Detection Bandwidth	Pass	Applicable for Master only
15.407(h)	Channel Availability Check Time	Pass	Applicable for Master only
15.407(h)	Channel Closing Transmission and Channel Move Time	Pass	Applicable
15.407(h)	Non-Occupancy Period	Pass	Applicable
15.407(h)	Statistical Performance Check	Pass	Applicable for Master only
15.407(h)	Non-Associated Test	Pass	Applicable for Client only

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	BE5000 Dual-Band PoE 2.5G Insight Managed WiFi 7 Outdoor Access Point
Brand	NETGEAR
Test Model	WBE700Y
Series Model	WBE708Y
Model Difference	Refer to note
DFS Firmware/software version	OpenWrt 23.05-SNAPSHOT r0+24216-d20243d5a / LuCI openwrt-23.05 branch git-24.034.54904-39d1aee
Operational Mode	Master (with TPC function) Client without radar detection (with TPC function)
Operating Frequency Band	5.25 GHz ~ 5.35 GHz 5.47 GHz ~ 5.725 GHz
Communication Mode	IP based
Channel Puncturing Function	Not Support

Note:

1. All models are listed as below.

Model	HW	FW	Differences
WBE700Y	Identical	Identical	SKU, Packing and labelling information Target retail markets
WBE708Y	Identical	Identical	SKU, Packing and labelling information Target service provider markets

2. The EUT uses following support unit.

Item	Brand	Model	Specification
POE	NETGEAR	MS108UP	Input: 54V, 4.7A
POE Adapter	NETGEAR	2ABU130S	AC Input: 100-240V~ 50/60Hz, 2.0A DC Output: 54V 2.4A, 130W AC Cable: 1.8M, 0core DC Output Cable: 1.5M, one core

3. There is WLAN (2.4 GHz / 5 GHz) technology used for the EUT.
4. Internal and external antennas cannot transmit simultaneously.
5. Simultaneously transmission combination.

Combination	Technology	
1	WLAN 2.4 GHz	WLAN 5 GHz
Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.		

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	RF Chain No.	Brand	Model	Max. Antenna Gain (dBi)	Min. Antenna Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type
Internal Ant 1_2G	0	WHAYU	7102A1428000	7.93	7.52	2.4~2.4835	Patch	ipex(MHF)
Internal Ant 2_2G	1	WHAYU	7102A1428000	8.22	7.75	2.4~2.4835	Patch	ipex(MHF)
Internal Ant 3_5G	0	WHAYU	7102A1428000	11.21	11.1	5.15~5.25	Patch Array	ipex(MHF)
				11.19	10.87	5.25~5.35		
				10.87	10.31	5.47~5.725		
				10.87	10.12	5.725~5.85		
Internal Ant 4_5G	1	WHAYU	7102A1428000	11.25	10.8	5.15~5.25	Patch Array	ipex(MHF)
				11.25	10.82	5.25~5.35		
				11.83	10.62	5.47~5.725		
				11.83	10.51	5.725~5.85		
External Ant 1_2G	0	AWAN	7102A1389000	3.77	3.04	2.4~2.4835	Dipole	RP-SMA
External Ant 2_2G	1	AWAN	7102A1389000	3.8	3.35	2.4~2.4835	Dipole	RP-SMA
External Ant 3_5G	0	AWAN	7102A1389000	4.16	2.88	5.15~5.25	Dipole	RP-SMA
				4.16	3.36	5.25~5.35		
				4.53	3.08	5.47~5.725		
				4.9	4.53	5.725~5.85		
External Ant 4_5G	1	AWAN	7102A1389000	3.6	3.23	5.15~5.25	Dipole	RP-SMA
				3.23	3.16	5.25~5.35		
				4.18	2.68	5.47~5.725		
				4.31	3.86	5.725~5.85		

Frequency range (GHz)	Directional Gain (dBi)	
	Internal Ant	External Ant
2.4~2.4835	10.96	6.25
5.15 ~ 5.25	14.02	5.91
5.25 ~ 5.35	11.25	5.91
5.47 ~ 5.725	11.83	5.86
5.725 ~ 5.85	12.2	5.86

* The detailed antenna information, please refer to WBE700Y Directional Gain Measurement data.

* If Directional Gain is less than individual antenna maximum peak gain, use individual antenna maximum peak gain as directional gain.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ac (VHT160)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
802.11ax (HE160)	2TX	2RX
802.11be (EHT20)	2TX	2RX
802.11be (EHT40)	2TX	2RX
802.11be (EHT80)	2TX	2RX
802.11be (EHT160)	2TX	2RX
802.11be (EHT240)	2TX	2RX

3.3 EUT Power Level

External

Highest Power Level						
Signal Mode	Frequency Band (MHz)	Conducted Power		Gain (dBi)	EIRP	
		(mW)	(dBm)		(mW)	(dBm)
CDD	5250-5350	209.215	23.21	4.16	545.246	27.37
	5470-5725	235.024	23.71	4.53	666.979	28.24
Beamforming	5250-5350	209.215	23.21	5.91	815.817	29.12
	5470-5725	235.024	23.71	5.86	905.967	29.57

Internal

Highest Power Level						
Signal Mode	Frequency Band (MHz)	Conducted Power		Gain (dBi)	EIRP	
		(mW)	(dBm)		(mW)	(dBm)
CDD	5250-5350	56.4	17.51	11.25	752.106	28.76
	5470-5725	61.322	17.88	11.83	934.58	29.71
Beamforming	5250-5350	56.4	17.51	11.25	752.106	28.76
	5470-5725	61.322	17.88	11.83	934.58	29.71

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Channel Availability Check Time

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
EMI Test Receiver R&S	ESR7	101451	2026/4/4	2027/4/3
EXA Signal Analyzer Agilent	N9010A	MY52220207	2026/3/23	2027/3/22
MXG Vector signal generator Keysight	N5182B	MY53052282	2026/1/2	2027/1/1
Software BV	BVDFS_Auto-ISM_Workbench_V2A2	N/A	N/A	N/A

Notes:

1. The test was performed in Huaya - DFS room.
2. Tested Date: 2026/7/1 ~ 2026/7/12

4.2 Channel Closing Transmission and Channel Move Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.3 Non-Occupancy Period

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 Non-Associated Test

Refer to section 4.1 to get the tested date and information of the instruments.

5 Limits of Test Items

5.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 1: Applicability of DFS Requirements Prior To Use a Channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓ note	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓
Note: Per KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.			

Table 2: Applicability of DFS Requirements during Normal Operation.

Requirement	Operational Mode	
	Master or Client with radar detection	Client without radar detection
DFS Detection Threshold	✓	Not required
Channel Closing Transmission Time	✓	✓
Channel Move Time	✓	✓
U-NII Detection Bandwidth	✓	Not required

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

5.2 Test Limits and Radar Signal Parameters

Detection Threshold Values

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Parameters of DFS Test Waveforms

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a --- Test B: 15 unique PRI values randomly selected within the range of 518-3066 μ sec, with a minimum increment of 1 μ sec, excluding PRI values selected in Test A	$\text{Roundup}\left\{\left(\frac{1}{360}\right)\cdot\left(\frac{19\cdot 10^6}{\text{PRI}_{\mu\text{sec}}}\right)\right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 6: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency.

a) the Channel center frequency
b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth
c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth

It include 10 trails for every subset, the formula as below,

For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel.

For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by:

$FL+(0.4*Chirp\ Width\ [in\ MHz])$

For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by:

$FH-(0.4*Chirp\ Width\ [in\ MHz])$


Table 7: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

6 Test Arrangements


6.1 Test Setup

Conducted measurement
Master Mode

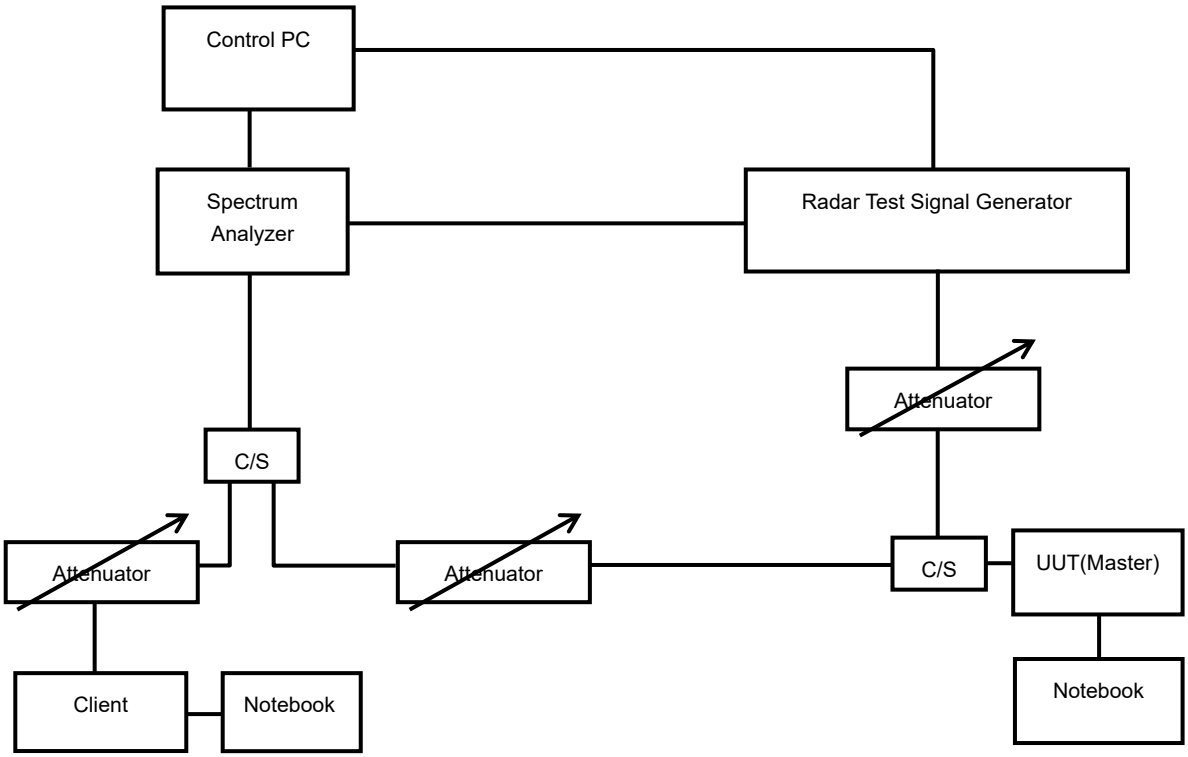

The UUT is a U-NII Device operating in Master mode. The radar test signals are injected into the Master Device.
Note: The correction factor has already been compensated by the instrument.

Client Mode

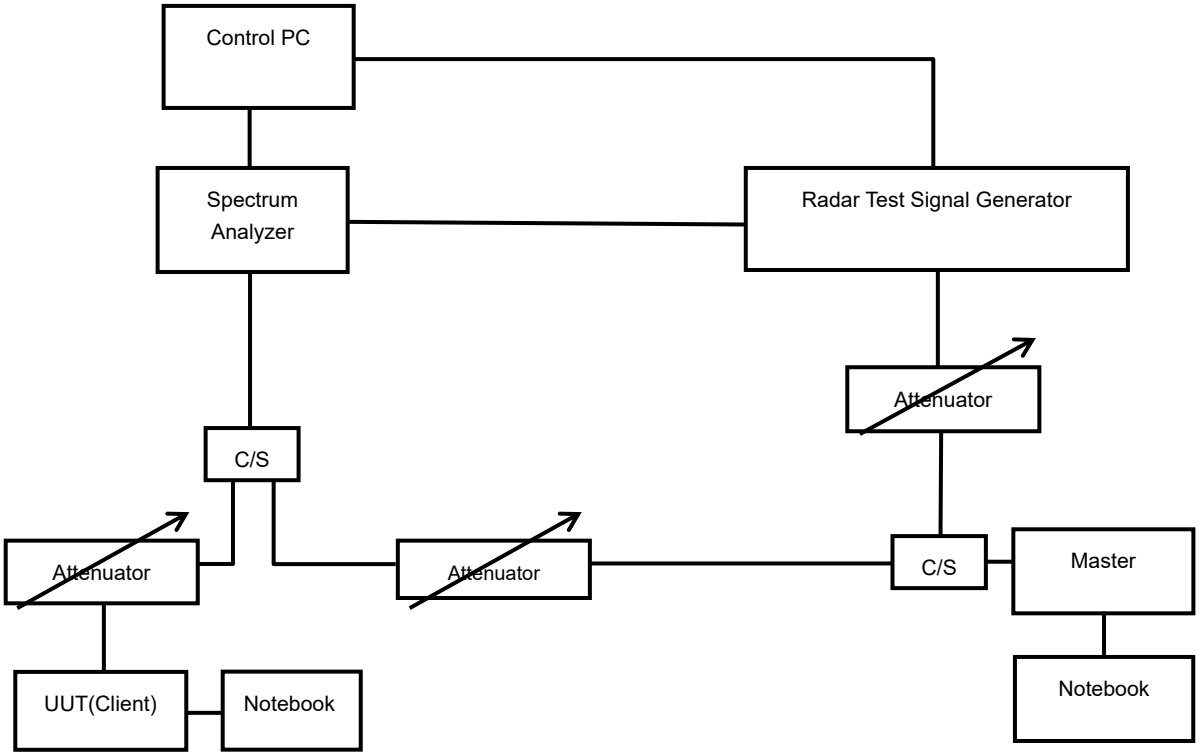


The UUT is a RLAN device operating in Client mode, without Radar Interference Detection function. The radar test signals are injected into the master device.
Note: The correction factor has already been compensated by the instrument.

6.2 Test Procedure

6.2.1 DFS Measurement System

A complete DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating system and (2) the Traffic Monitoring system. The control PC is necessary for generating the Radar waveforms in Table 5, 6 and 7. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

Conducted Setup Configuration of DFS Measurement System

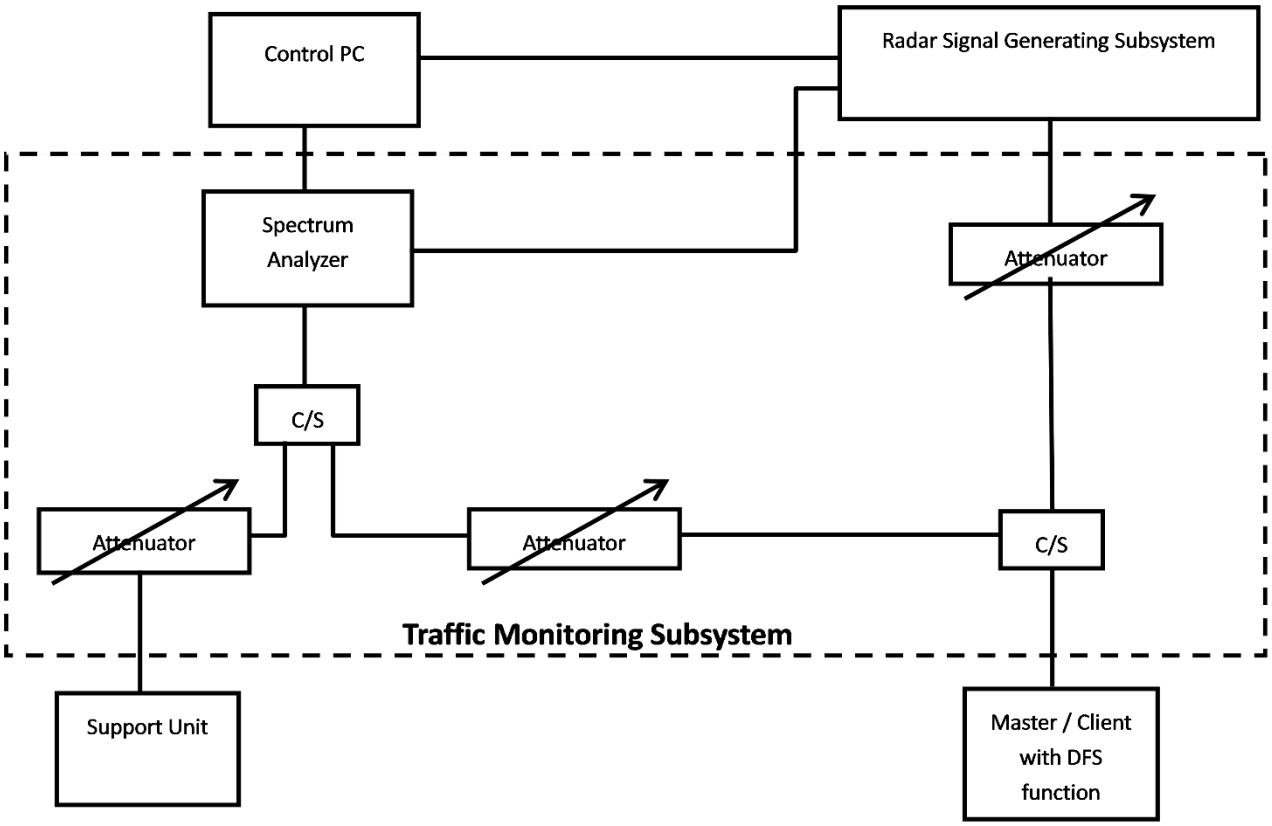

Note: The correction factor has already been compensated by the instrument.

Channel Loading

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:


External

Client without radar detection

Applicable	Requirements apply
	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
√	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.

Plots of Channel Loading

Duty Cycle


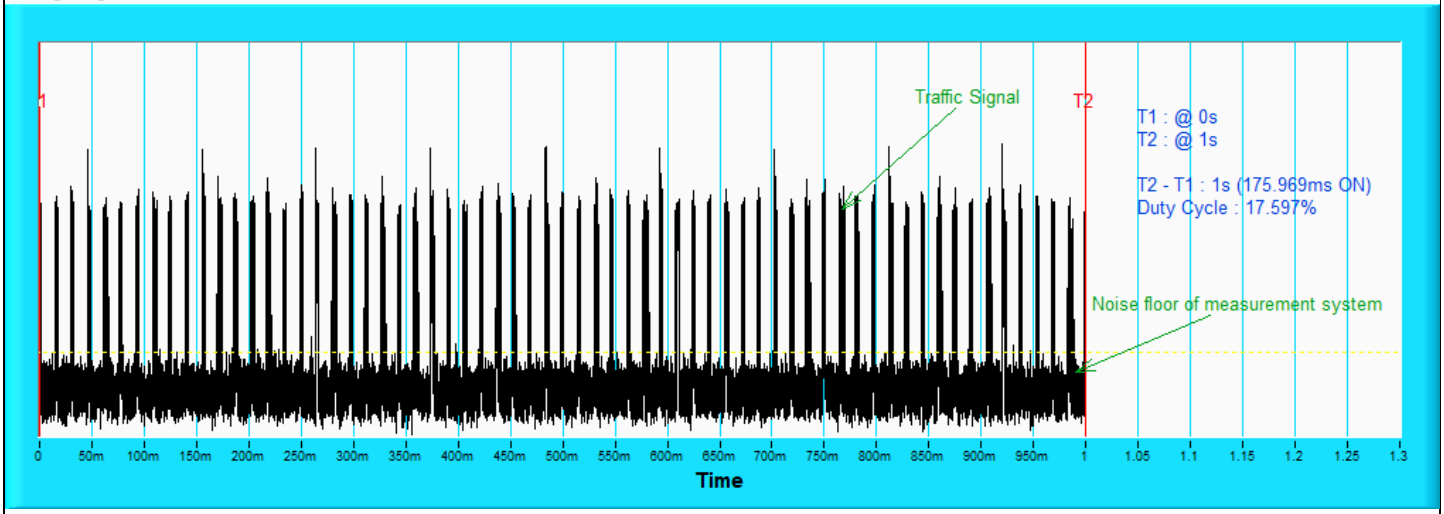


802.11be (EHT240)

External


Master

Applicable	Requirements apply
	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
√	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.

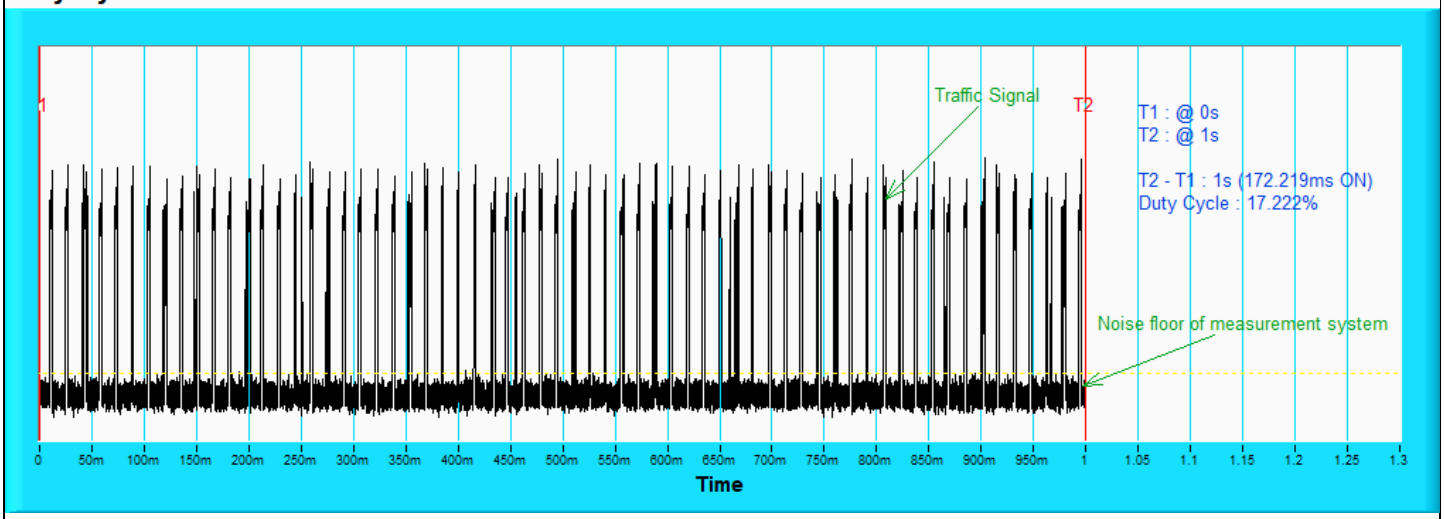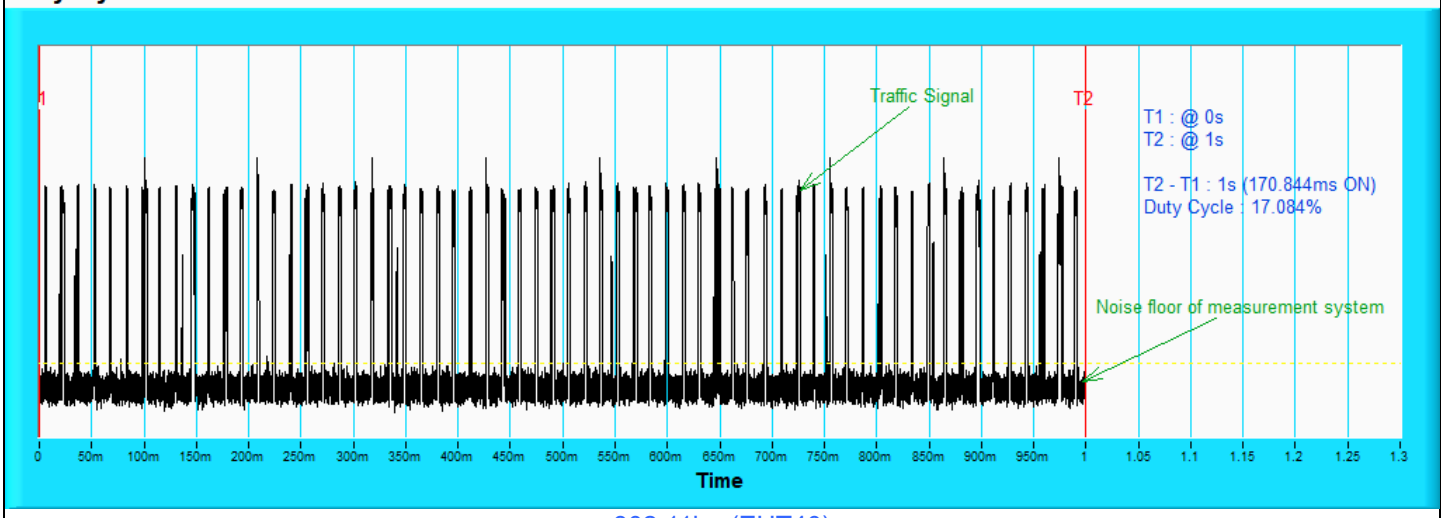Plots of Channel Loading
Duty Cycle

802.11be (EHT20)
Duty Cycle

802.11be (EHT40)

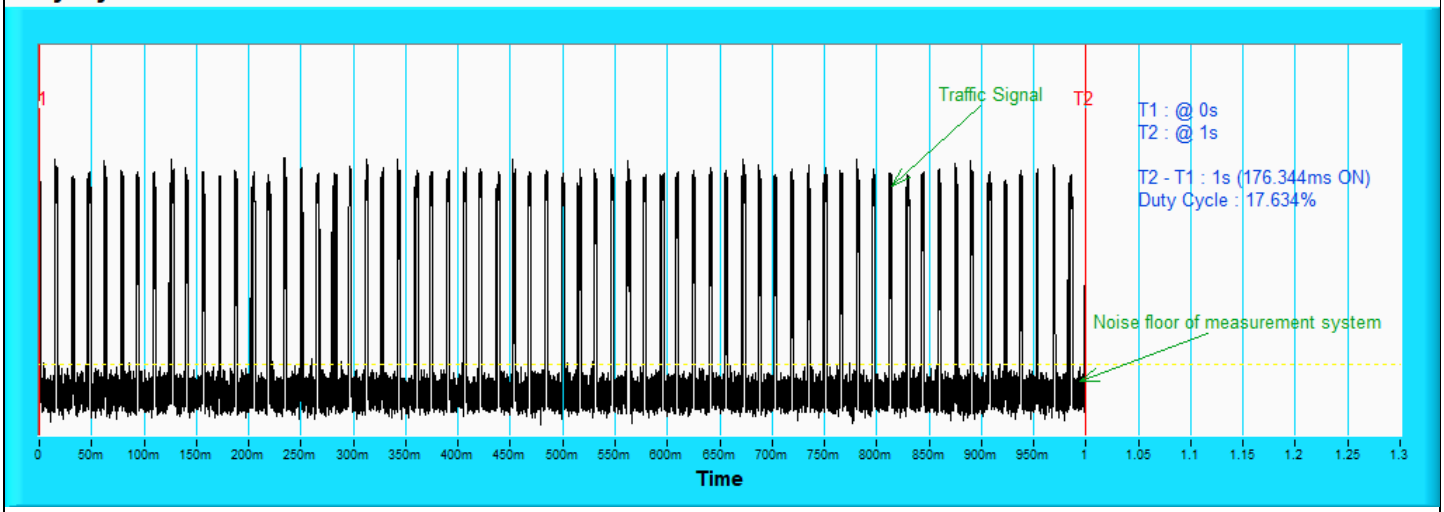
Plots of Channel Loading

Duty Cycle




802.11be (EHT80)

Duty Cycle

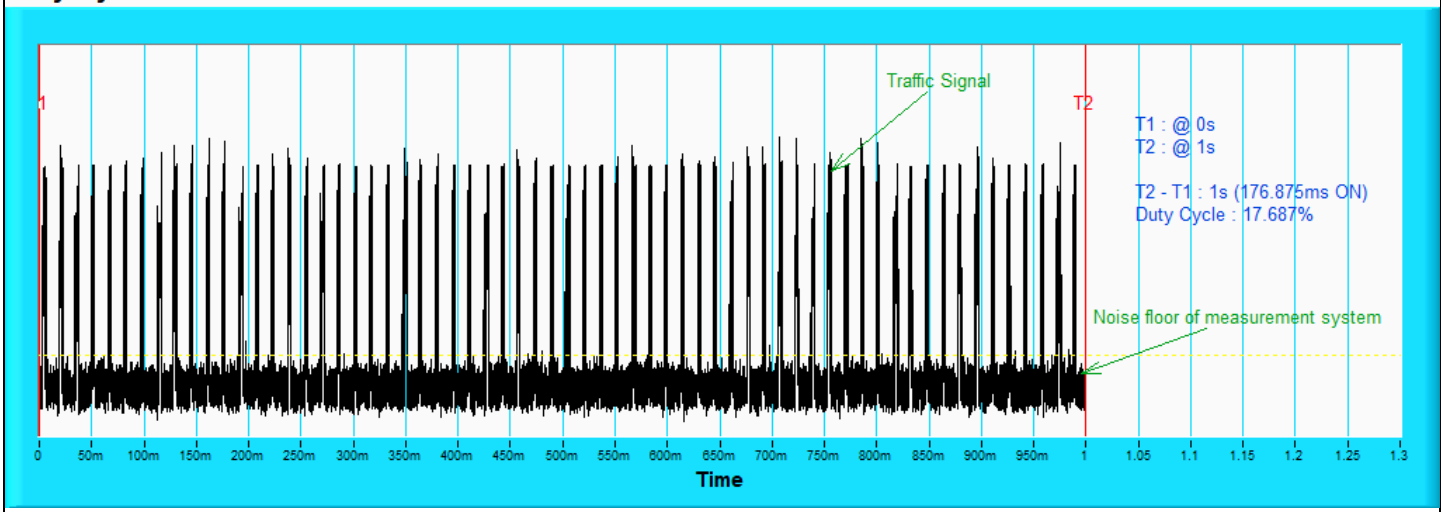

802.11be (EHT160)

Duty Cycle

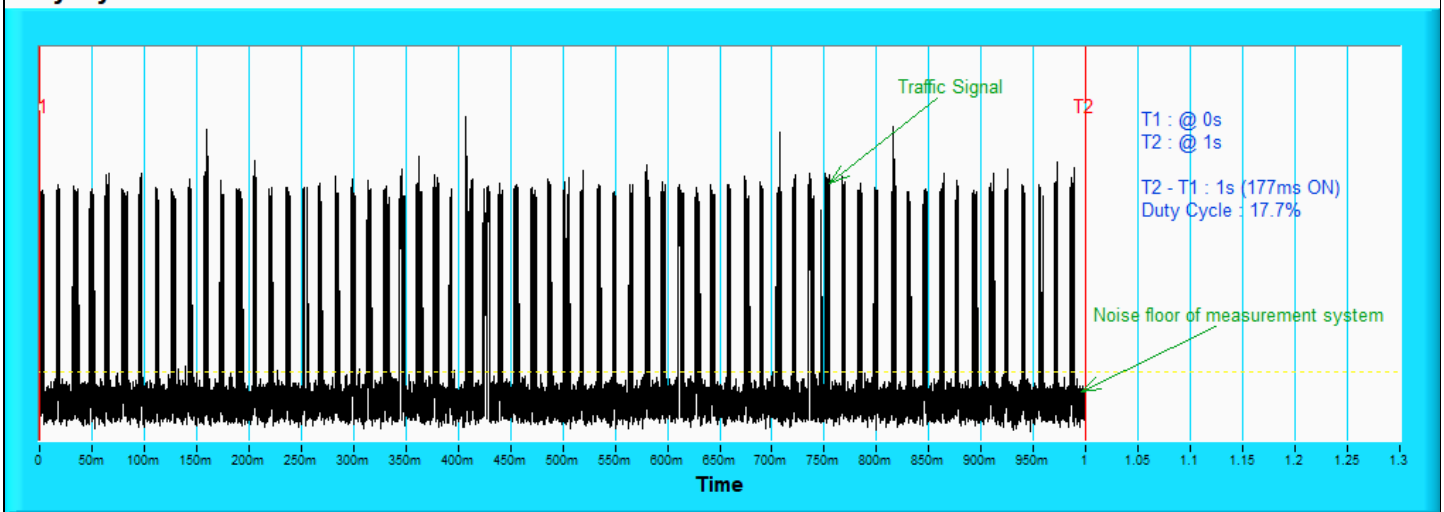


802.11be (EHT240)



Internal

Client without radar detection

Applicable	Requirements apply
	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
√	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.

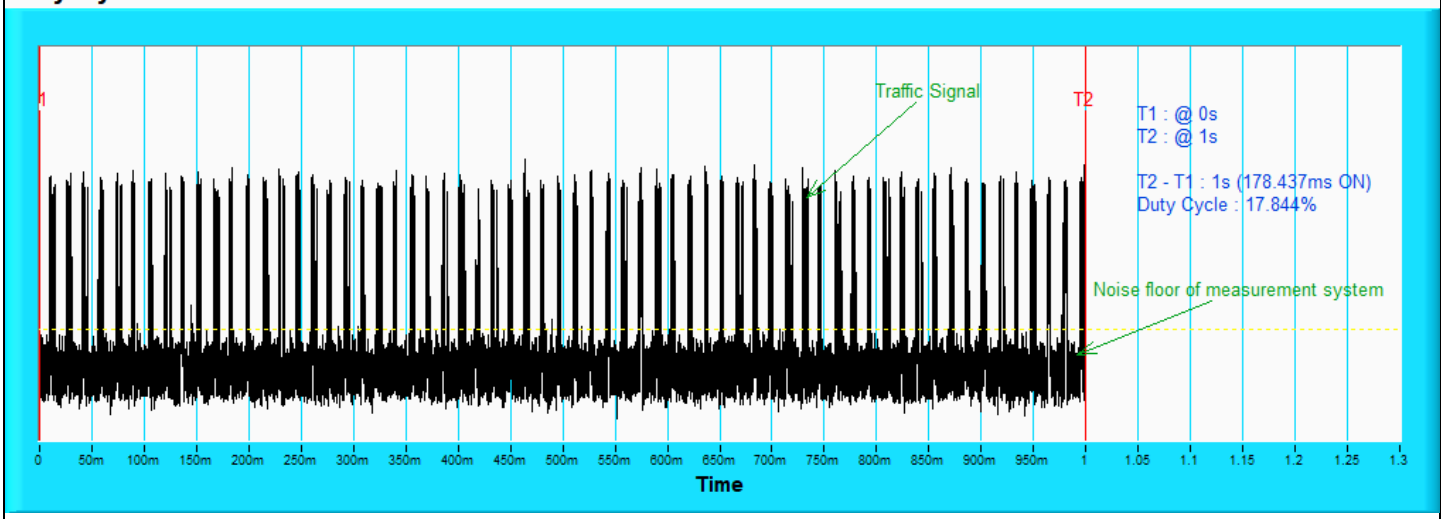
Plots of Channel Loading
Duty Cycle

802.11be (EHT240)

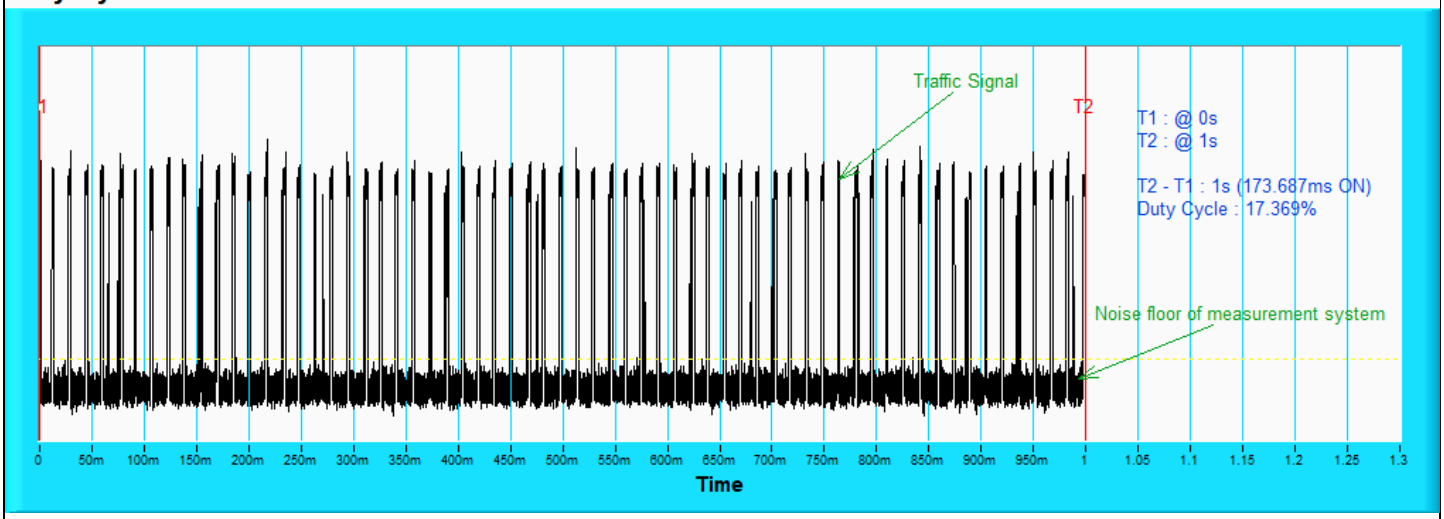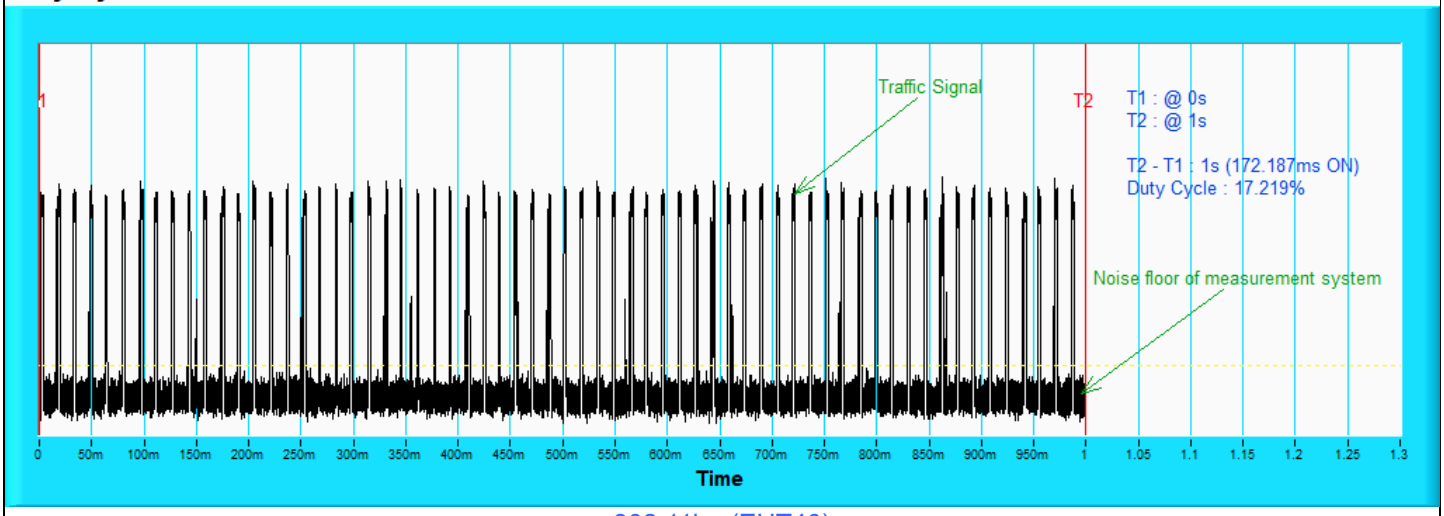Applicable	Requirements apply
	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
√	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.

Plots of Channel Loading
Duty Cycle

802.11be (EHT20)
Duty Cycle

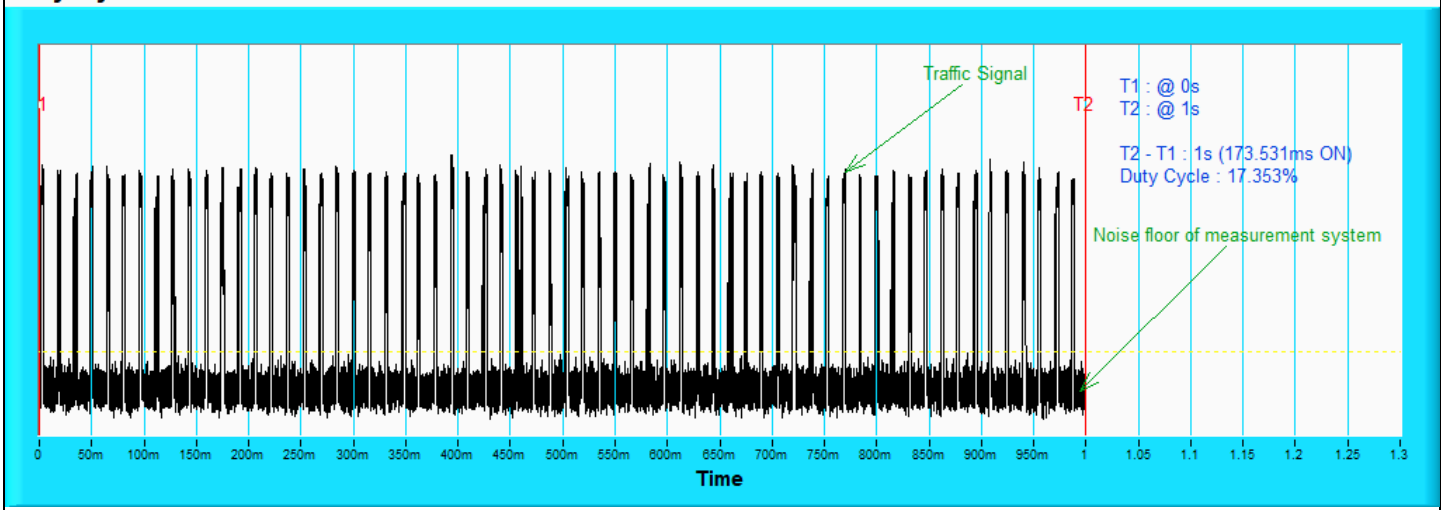802.11be (EHT40)


Plots of Channel Loading

Duty Cycle




802.11be (EHT80)

Duty Cycle

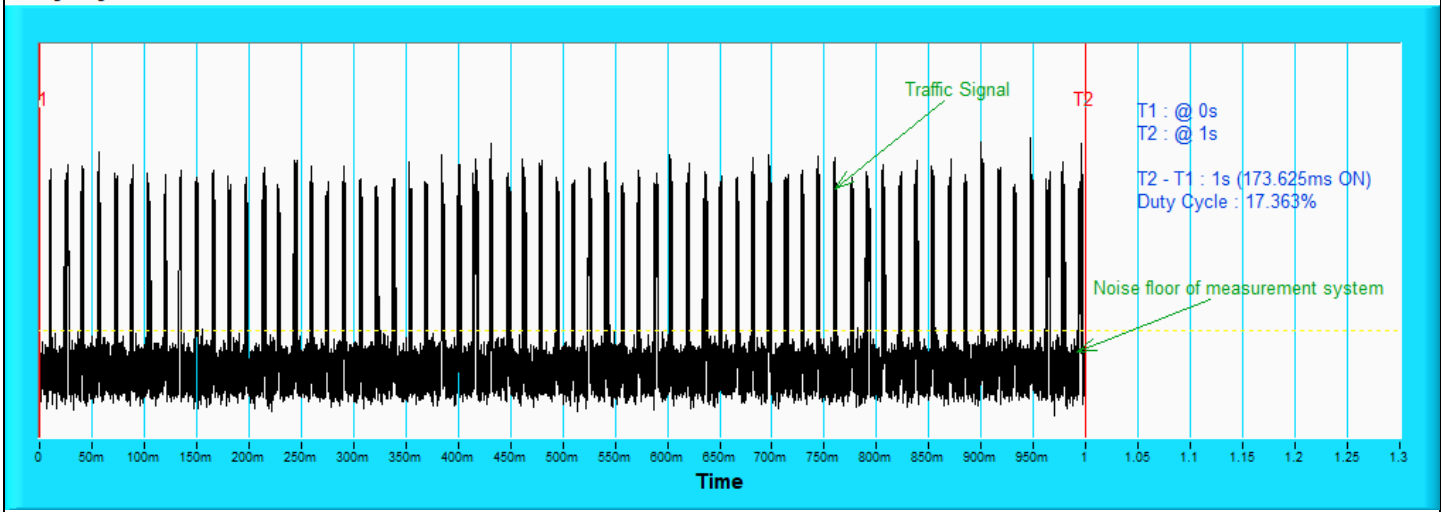

802.11be (EHT160)

Duty Cycle

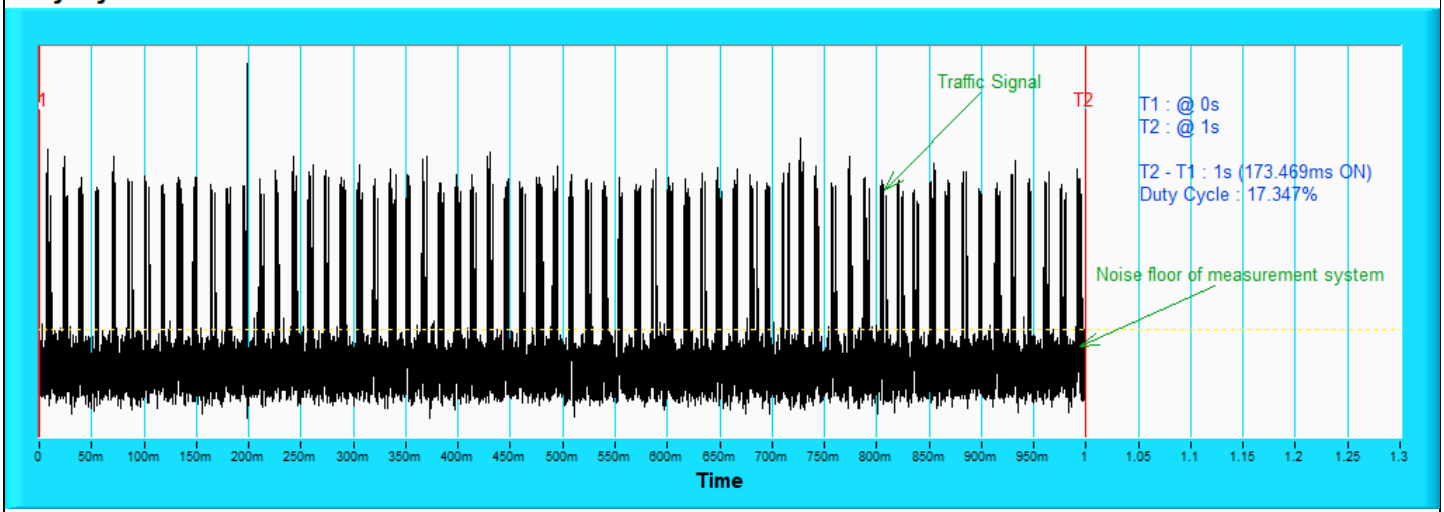


802.11be (EHT240)

6.2.2 Calibration of DFS Detection Threshold Level

The measured channel is chosen from the operating channels of the UUT within the DFS band and using the all bandwidth mode available for the link. The radar signal was the same as transmitted channels, and injected into the antenna of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

Conducted Setup Configuration of Calibration of DFS Detection Threshold Level

The calibrated conducted detection threshold level is set to -64 dBm. The tested level is lower than required level hence it provides margin to the limit.

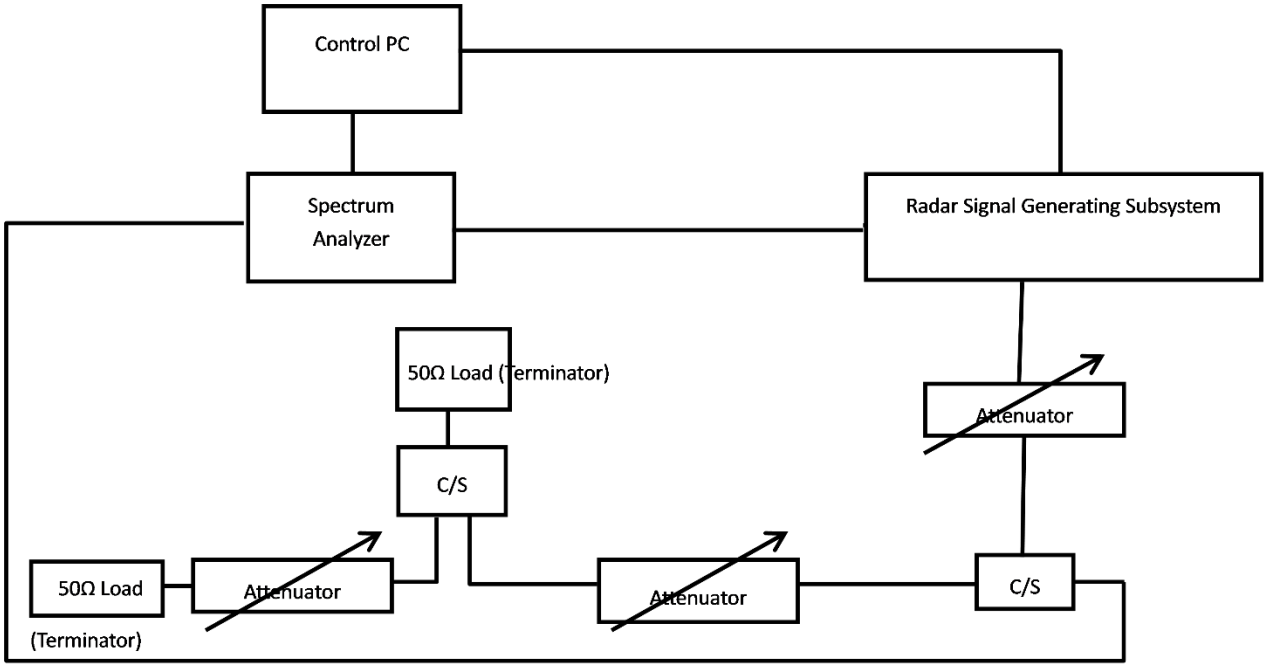

Note: The correction factor has already been compensated by the instrument.


6.2.3 DFS Detection Threshold

External

Client without radar detection

Test Mode: Device Operating in Client without radar detection Mode
Client with injection at the Master. (The radar test waveforms are injected into the Master Device)

The antenna net gain is 2.68 dBi.
DFS Detection Threshold = -64 dBm + 2.68 dBi = -61.32 dBm
The calibrated conducted detection threshold level is lower than -61.32 dBm.

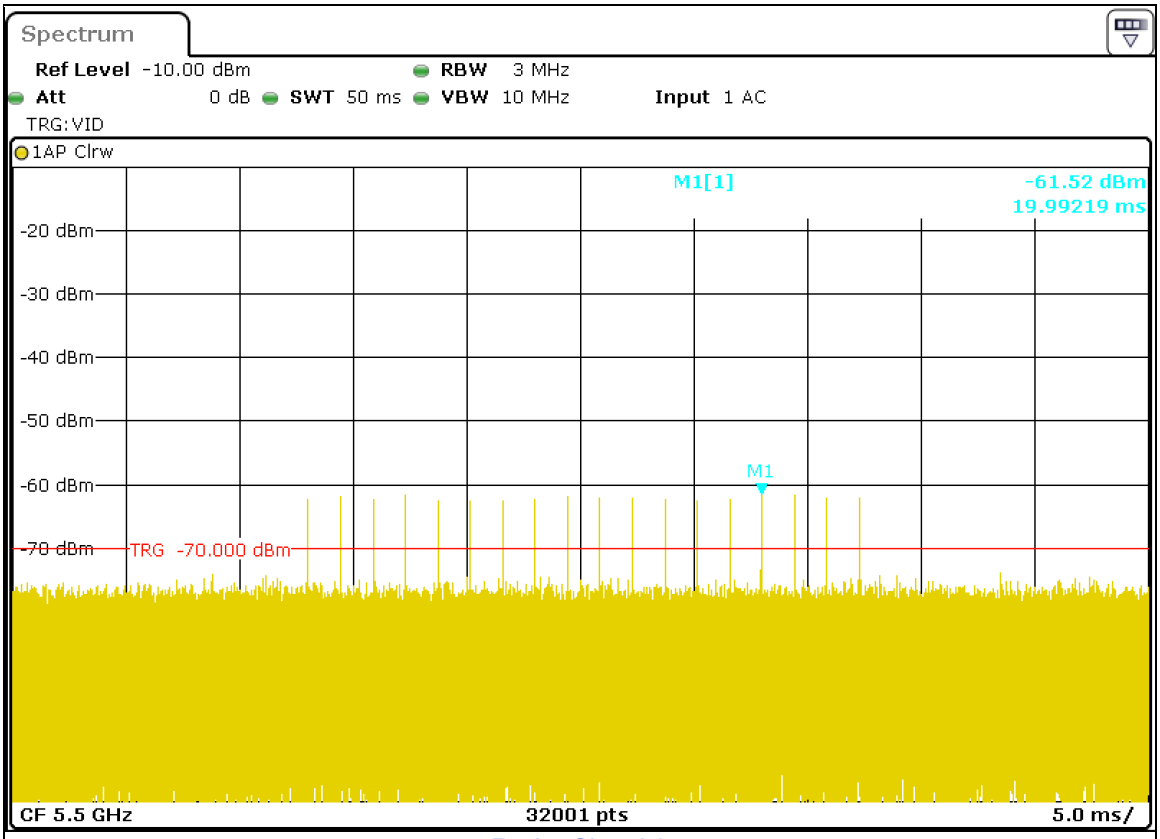


Radar Signal 0

External


Master

Test Mode: Device Operating in Master Mode
The radar test waveforms are injected into the Master.


The antenna net gain is 2.68 dBi.
DFS Detection Threshold = -64 dBm + 2.68 dBi = -61.32 dBm
The calibrated conducted detection threshold level is lower than -61.32 dBm.

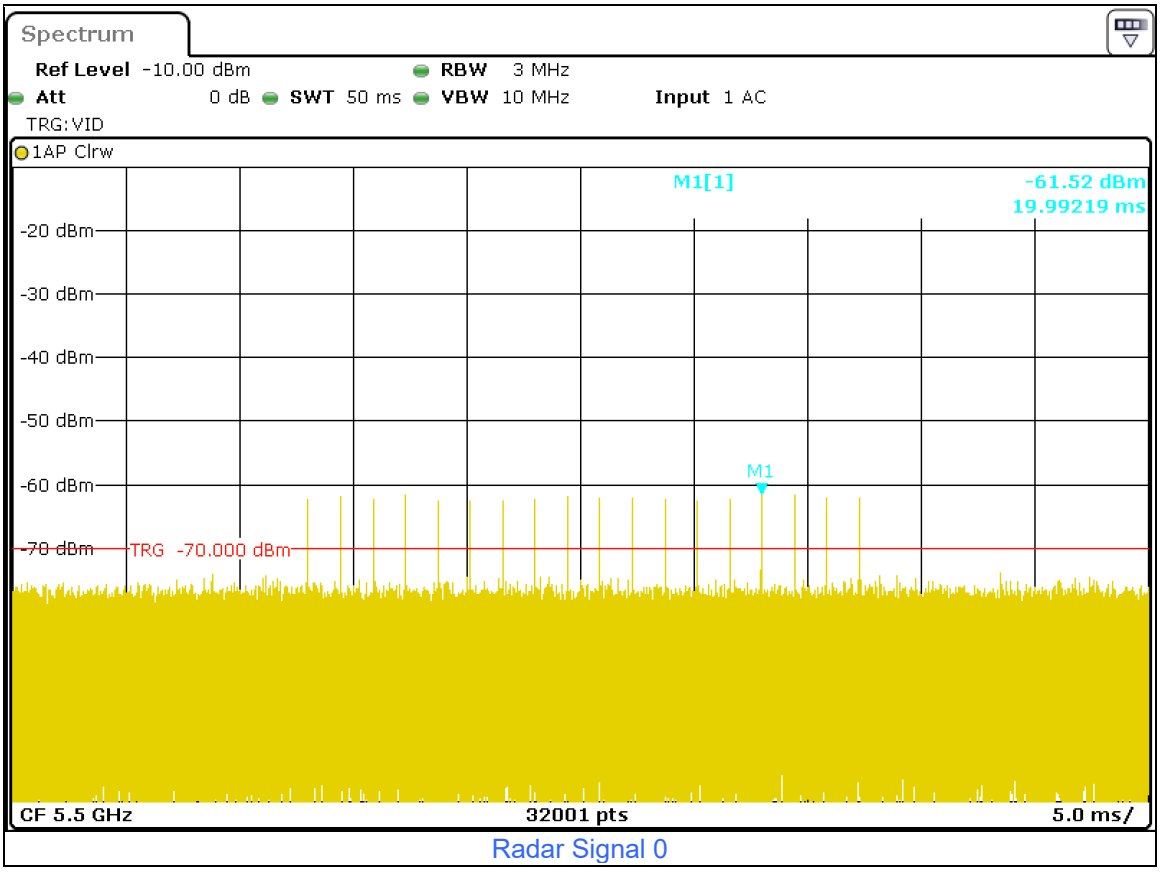


Radar Signal 0

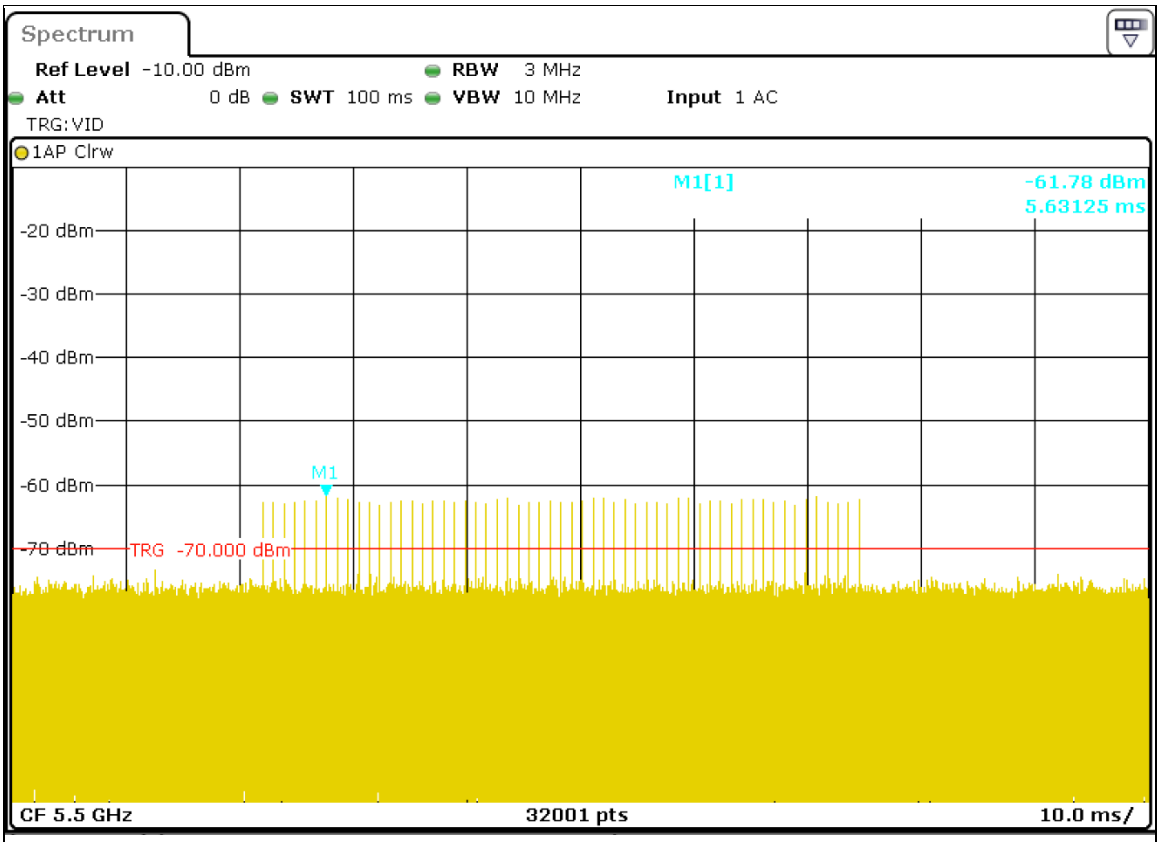


Radar Signal 1 (Test A)

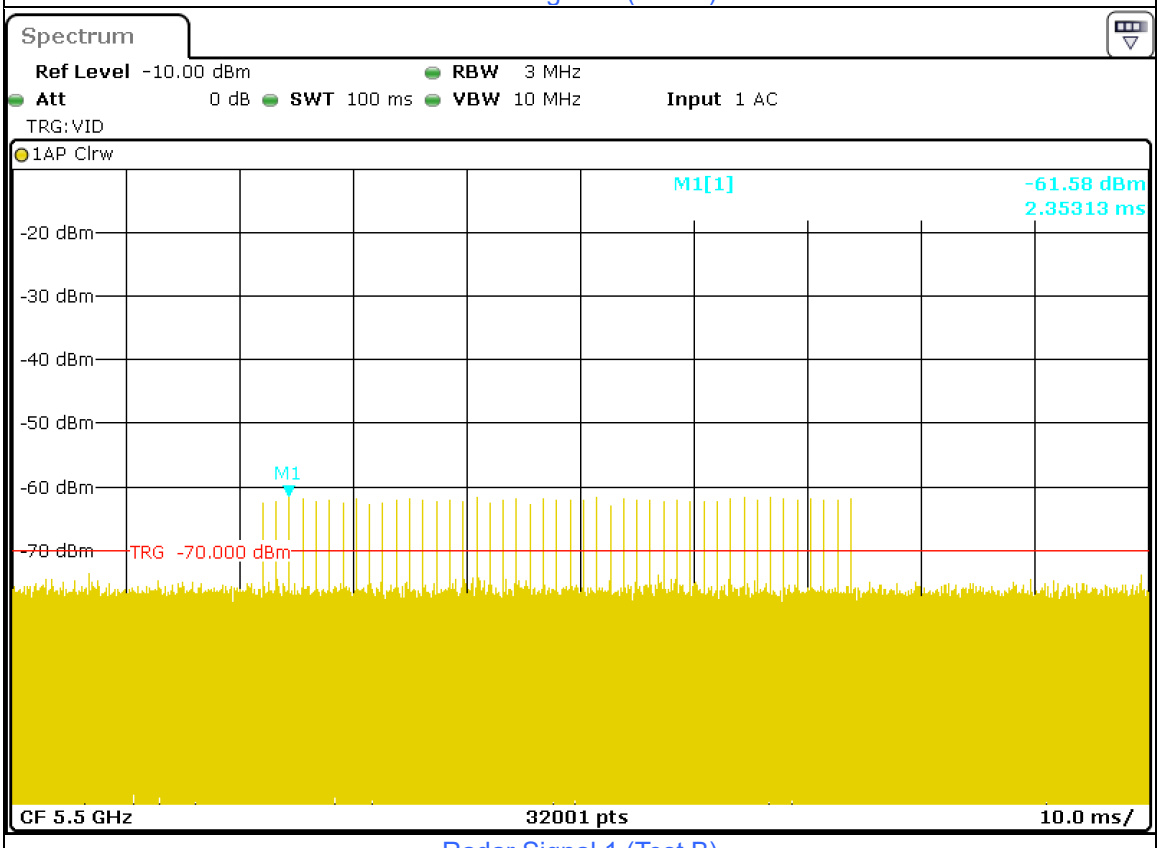


Radar Signal 1 (Test B)

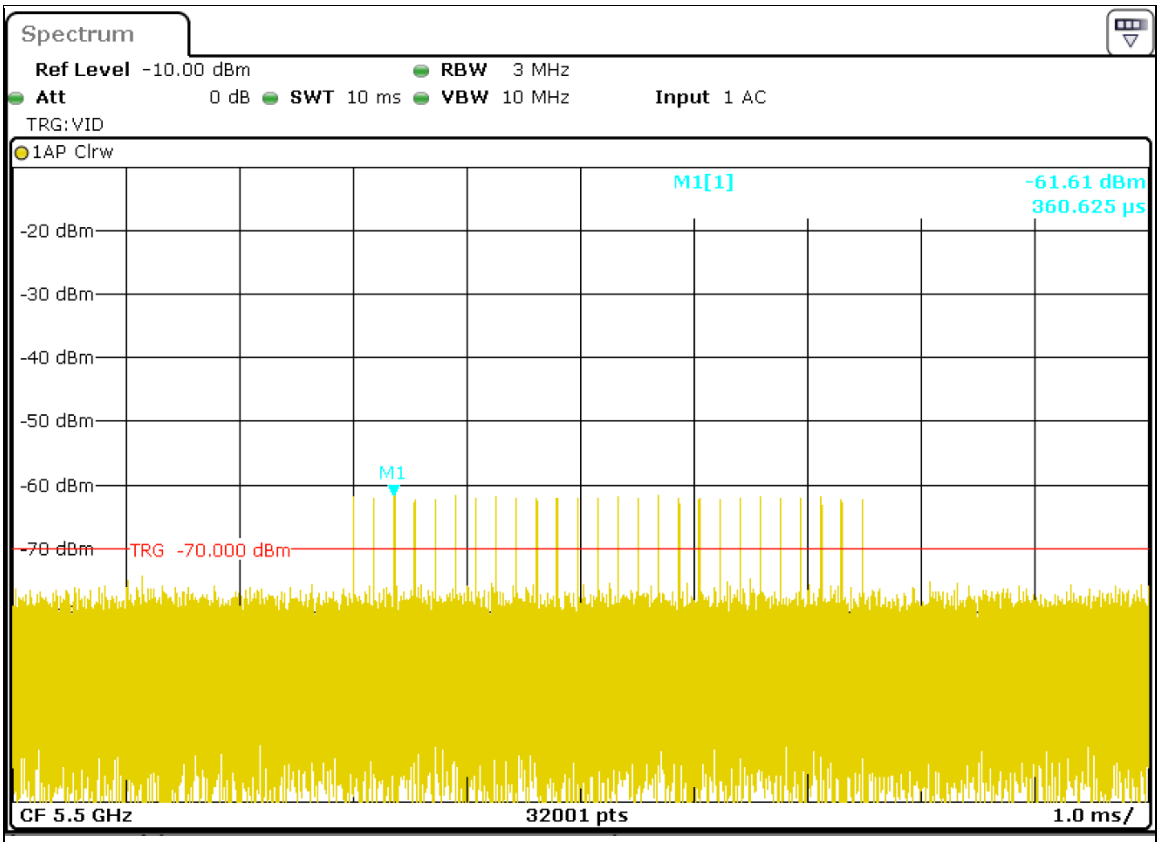


Radar Signal 2

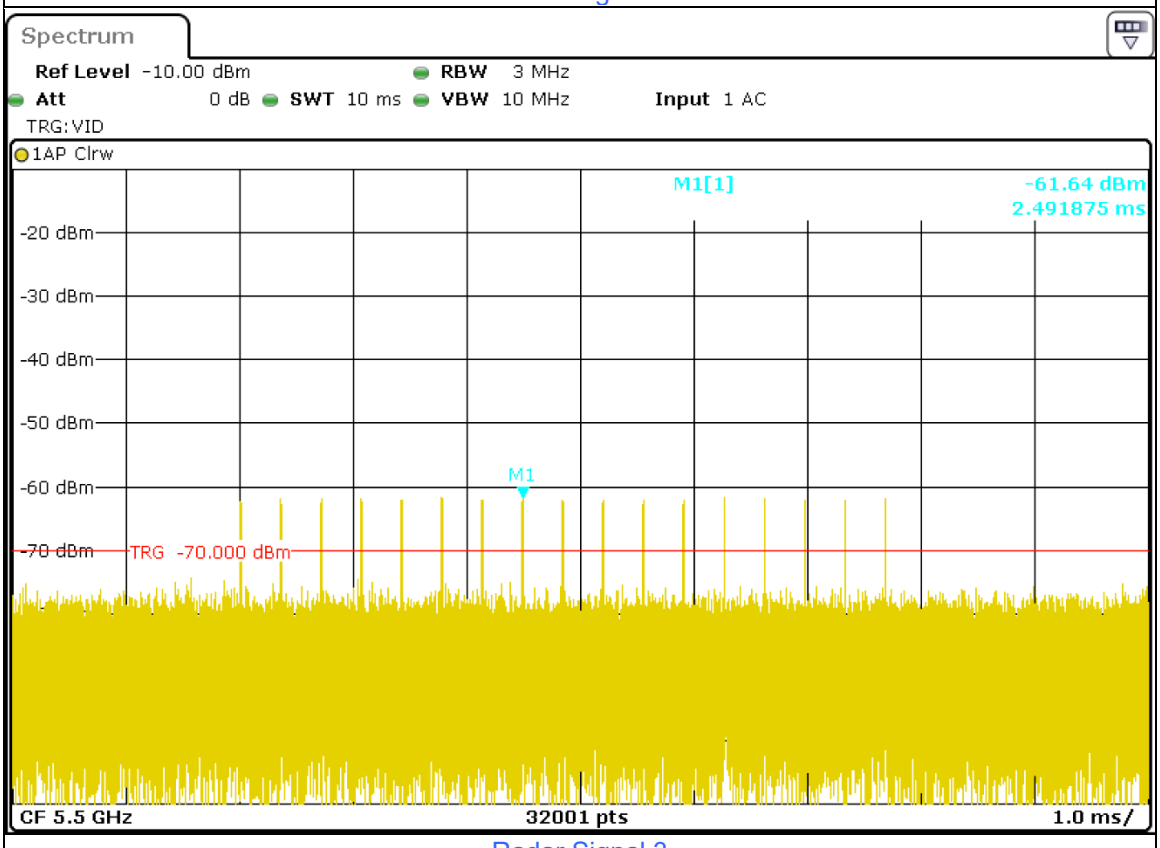


Radar Signal 3

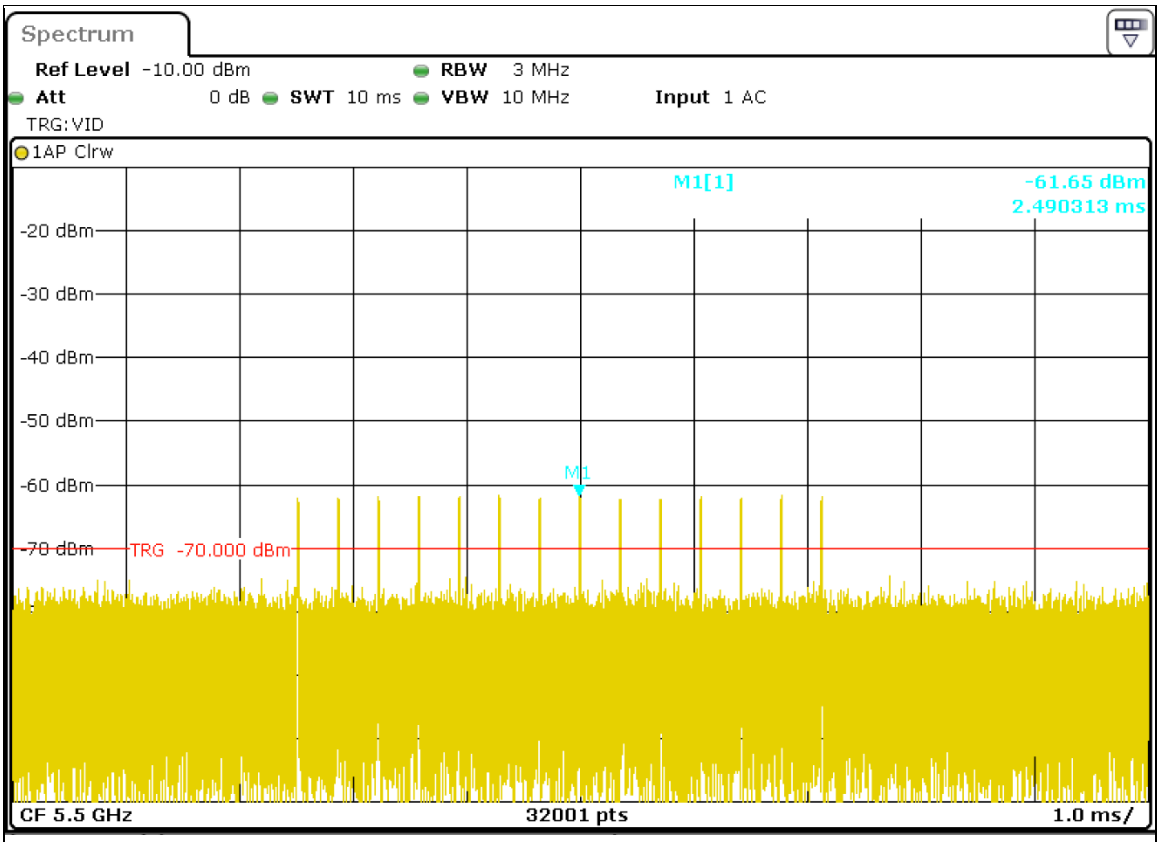


Radar Signal 4

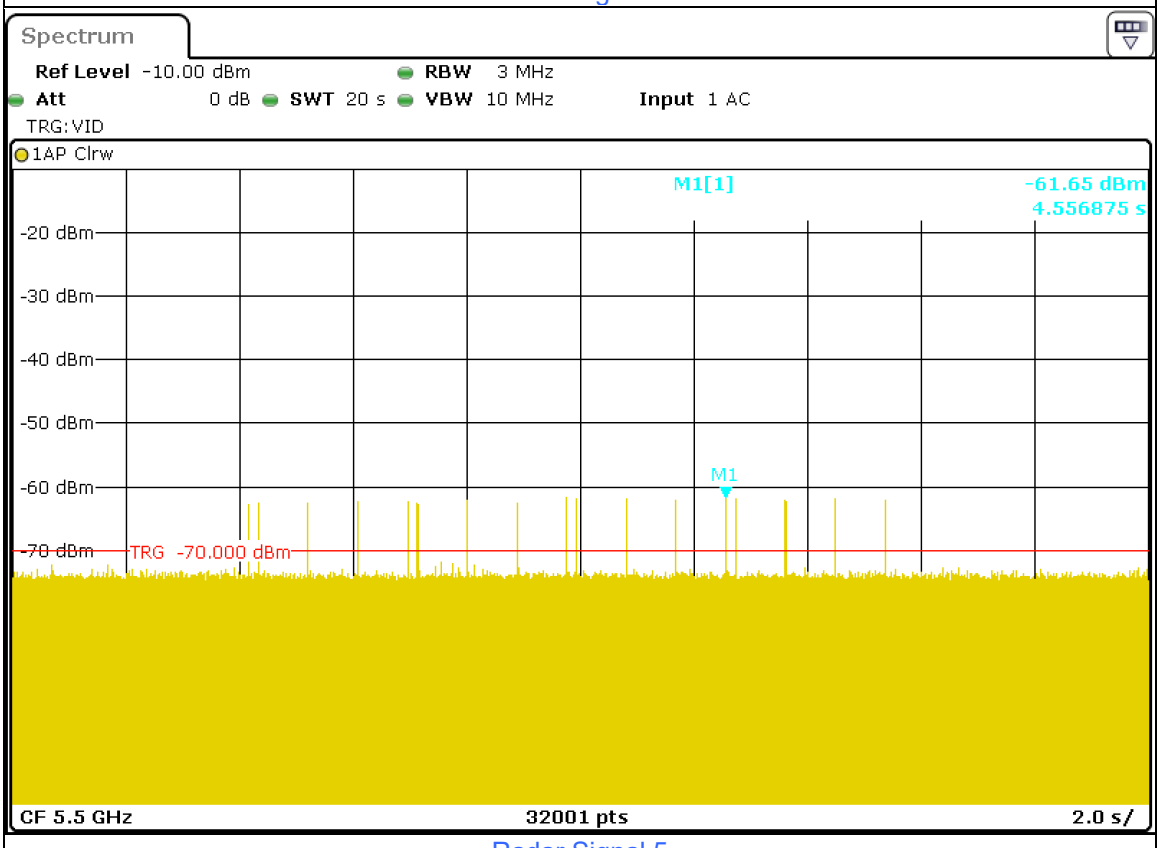

Radar Signal 5

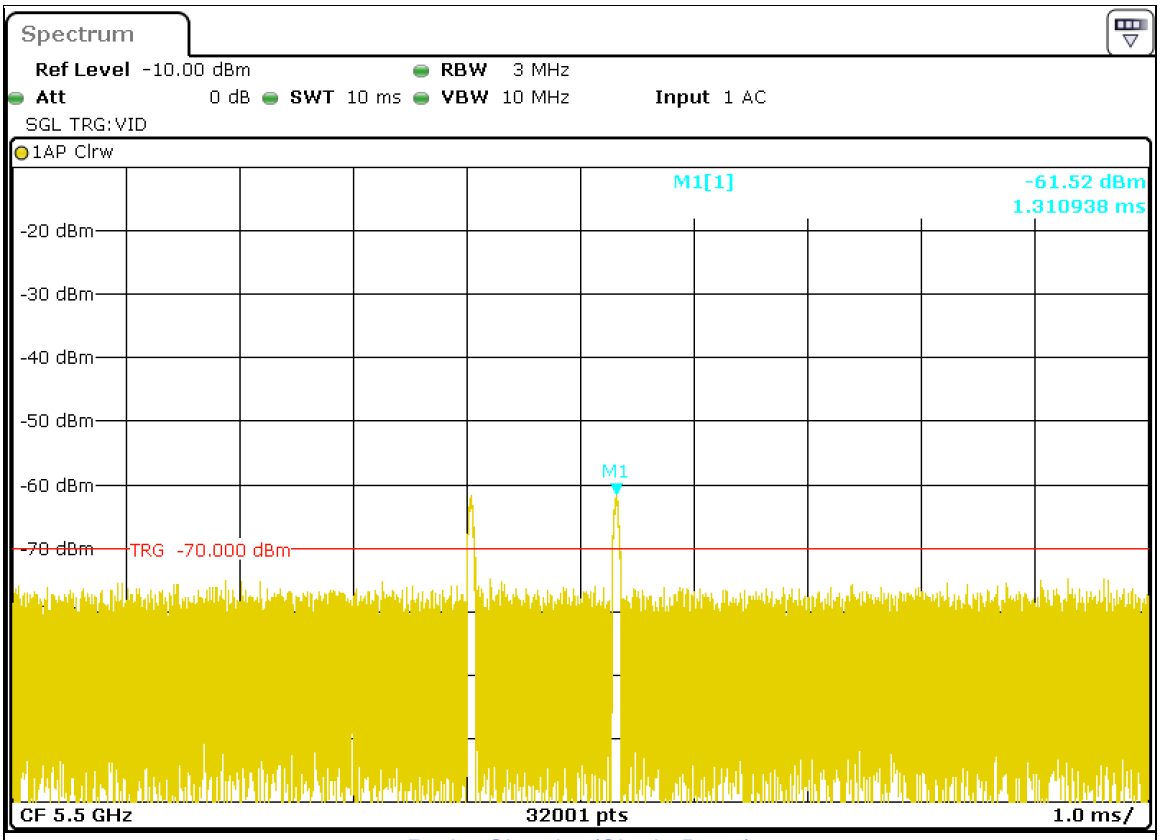

Radar Signal 5 (Single Burst)

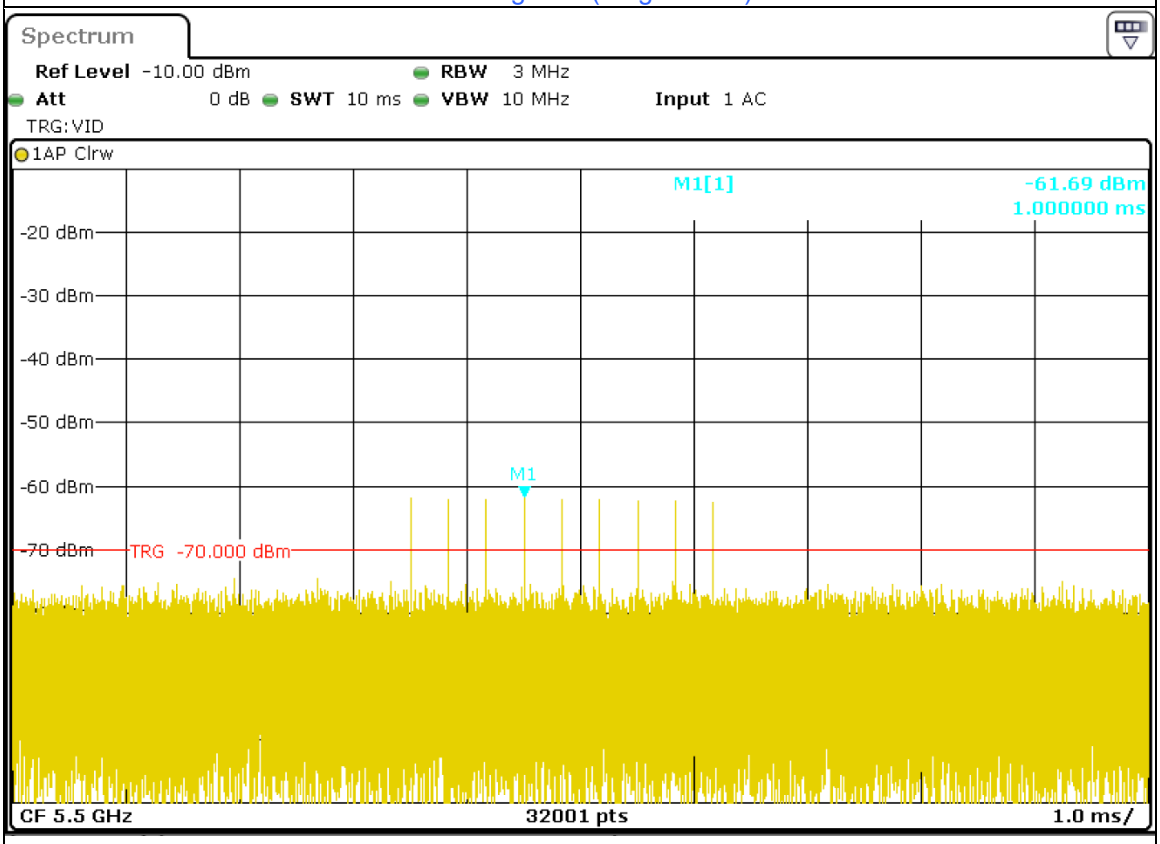


Radar Signal 6

Internal

Client without radar detection

Test Mode: Device Operating in Client without radar detection Mode
Client with injection at the Master. (The radar test waveforms are injected into the Master Device)

The antenna net gain is 10.31 dBi.
DFS Detection Threshold = -64 dBm + 10.31 dBi = -53.69 dBm
The calibrated conducted detection threshold level is lower than -53.69 dBm.

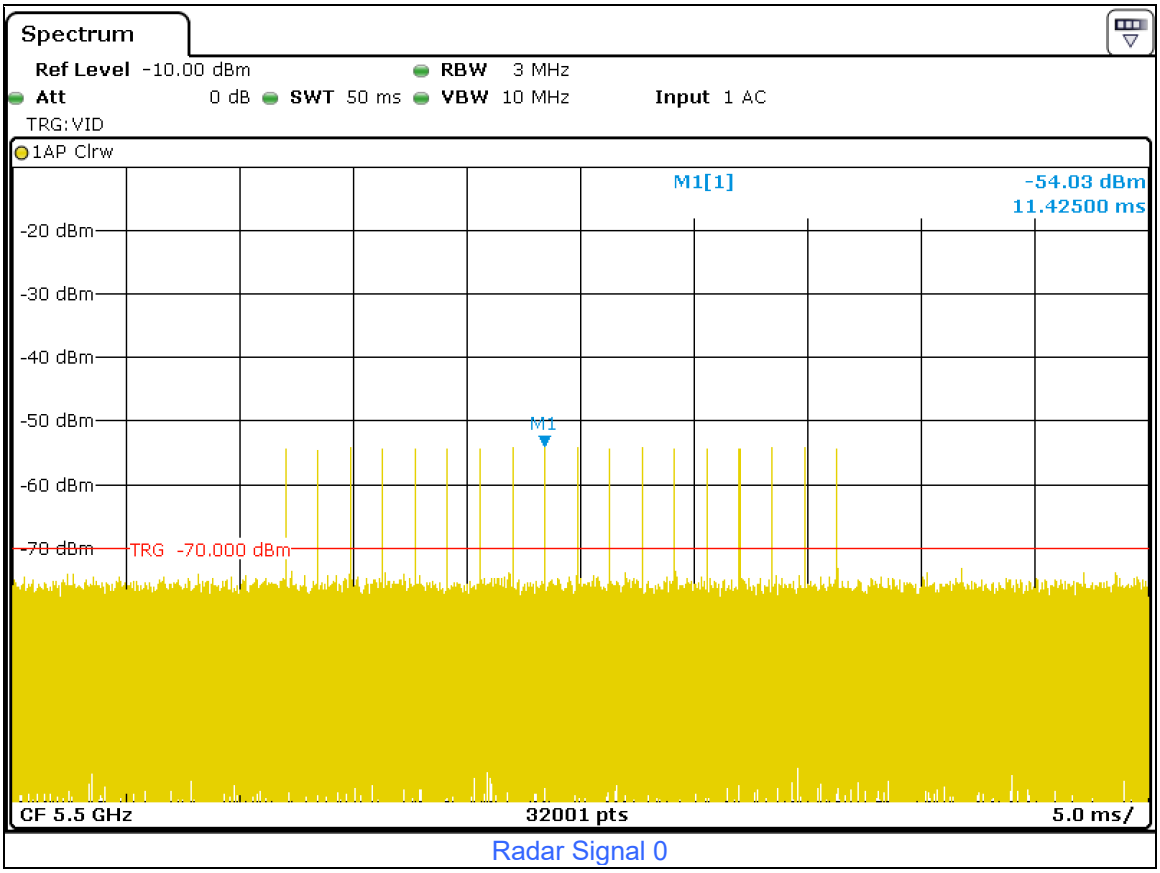


Radar Signal 0

Internal


Master

Test Mode: Device Operating in Master Mode
The radar test waveforms are injected into the Master.


The antenna net gain is 10.31 dBi.
DFS Detection Threshold = -64 dBm + 10.31 dBi = -53.69 dBm
The calibrated conducted detection threshold level is lower than -53.69 dBm.

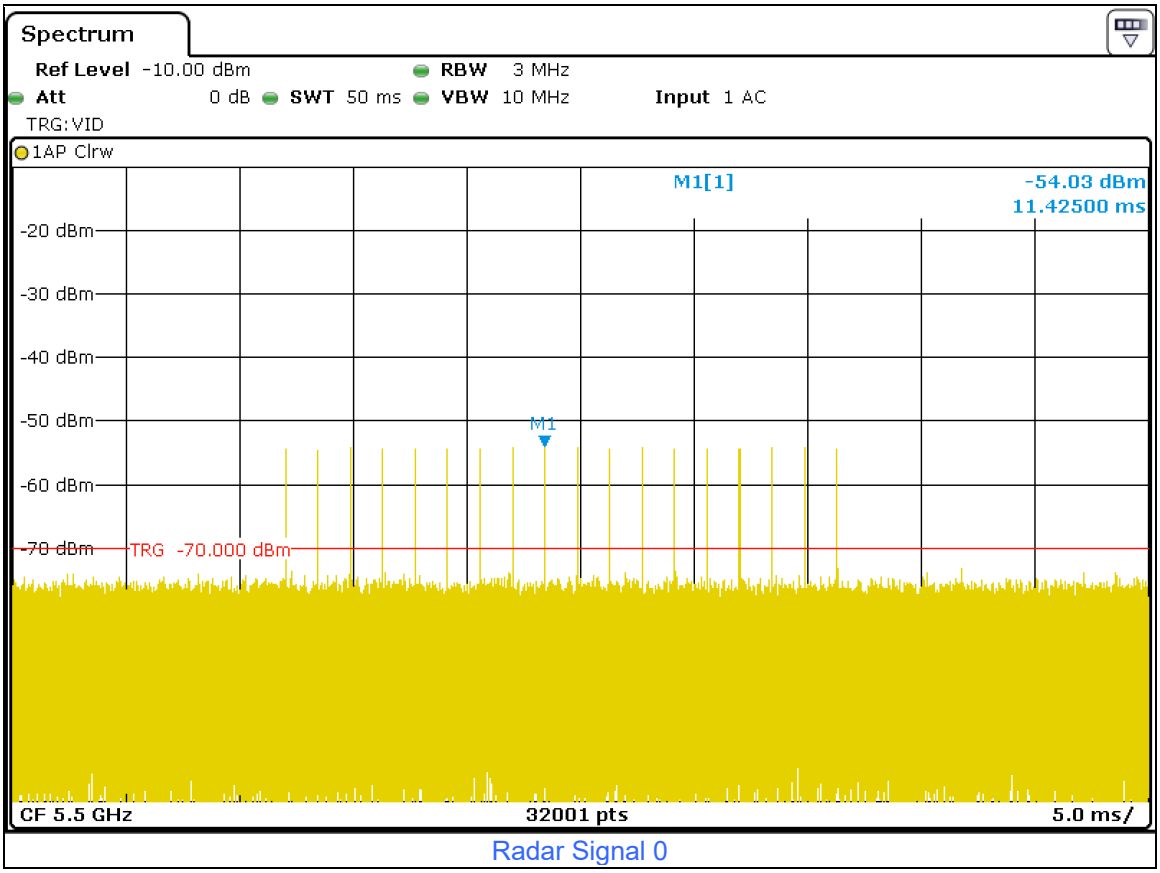


Radar Signal 0

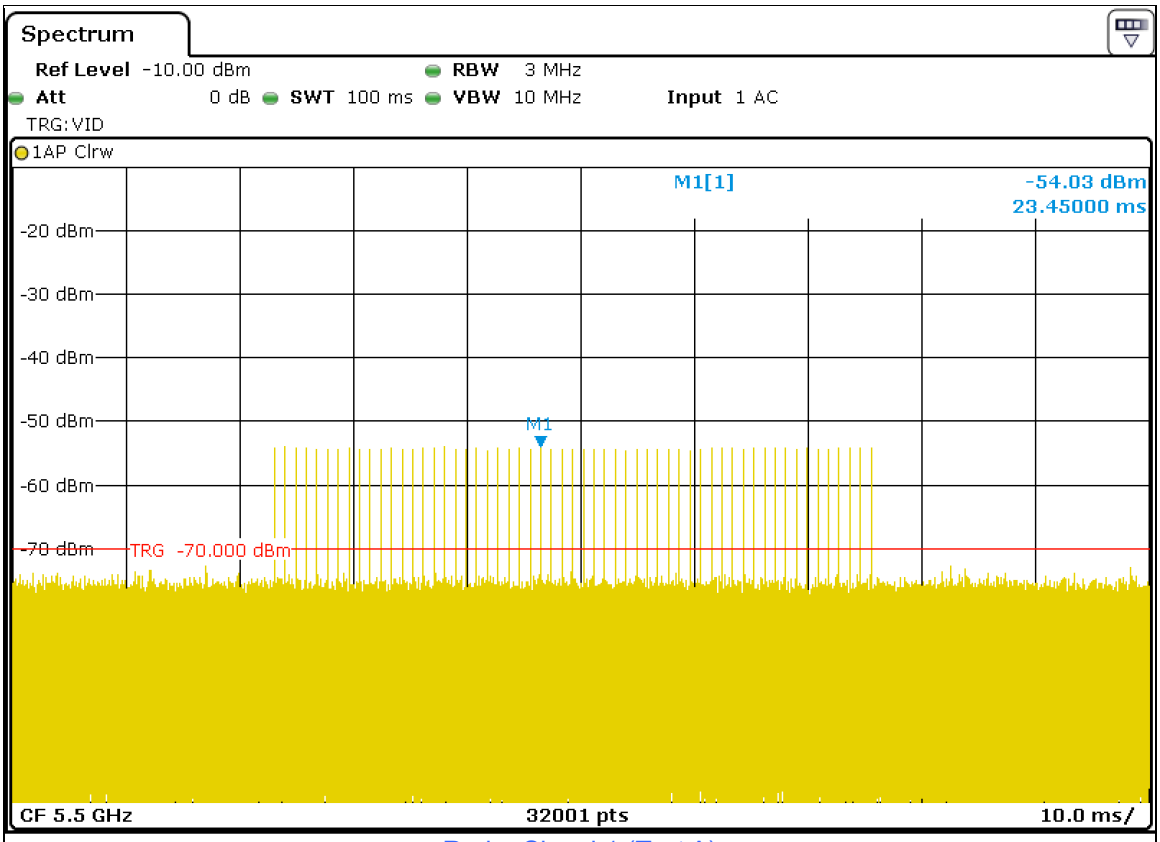


Radar Signal 1 (Test A)

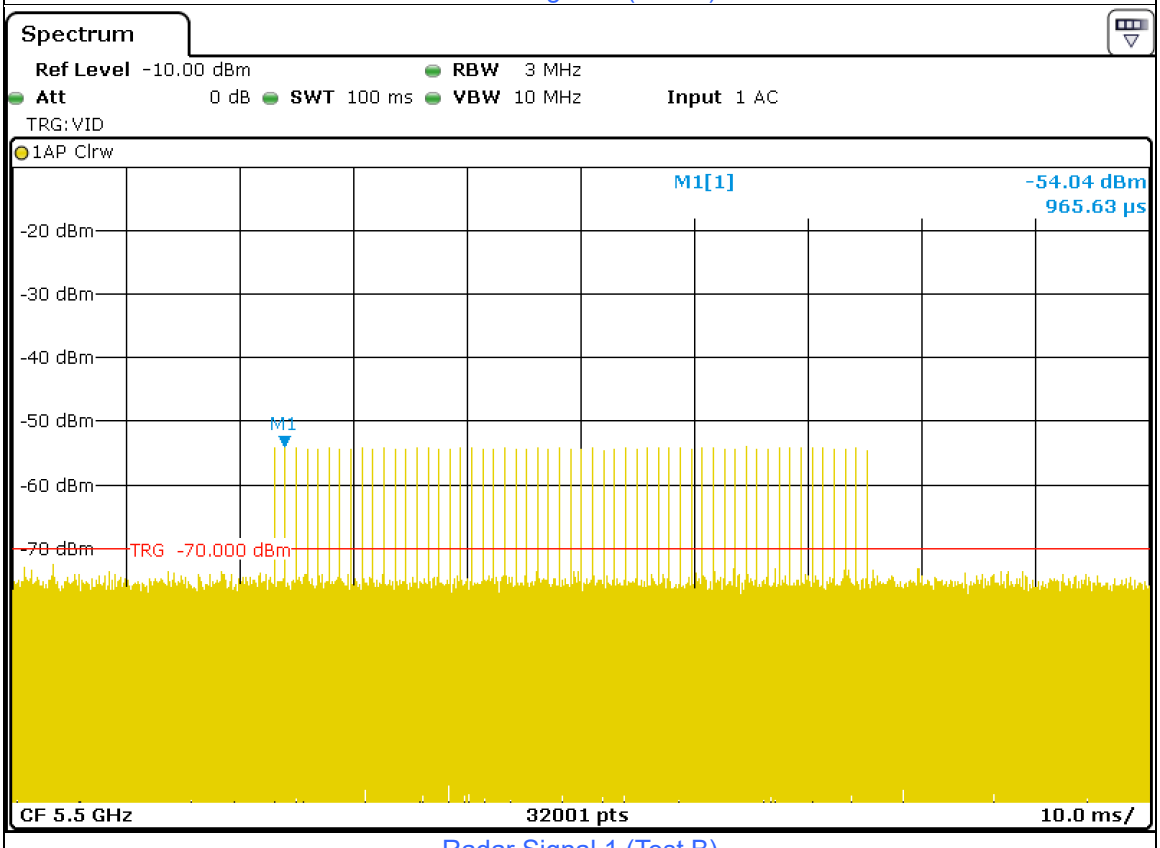


Radar Signal 1 (Test B)

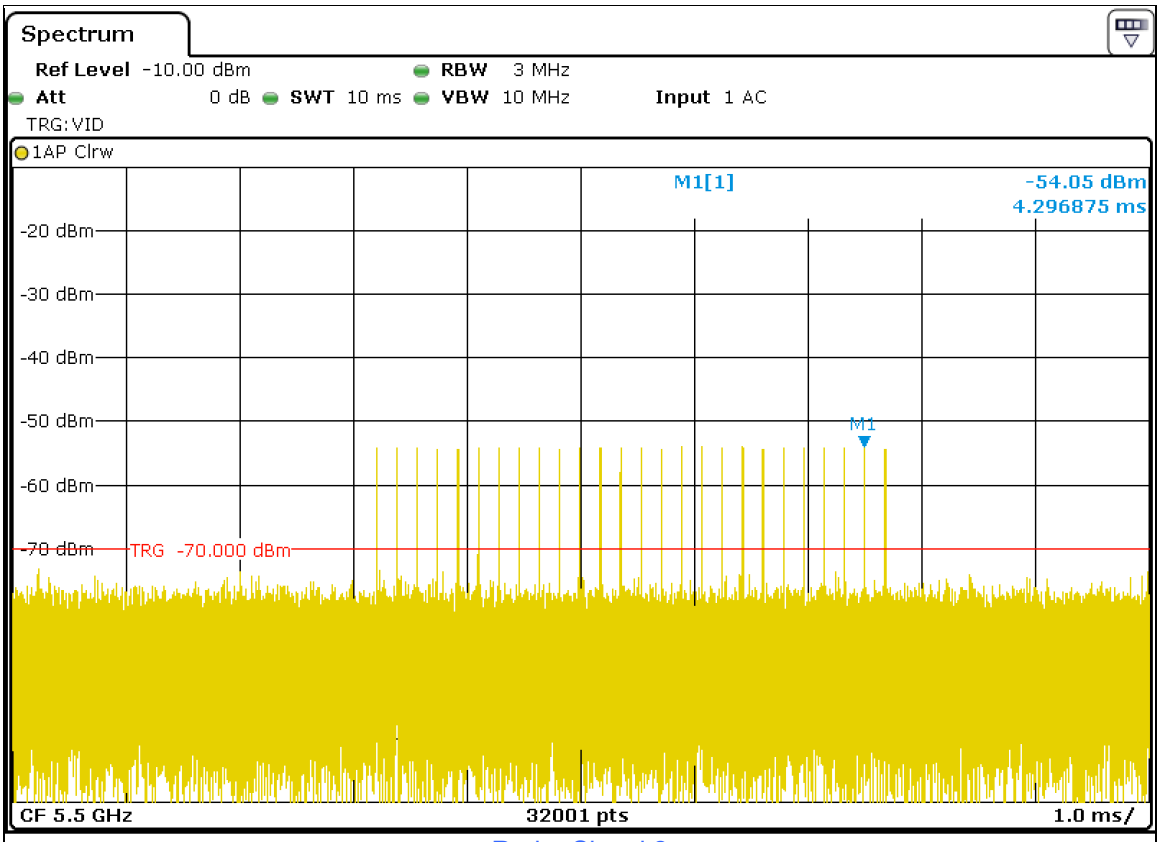


Radar Signal 2

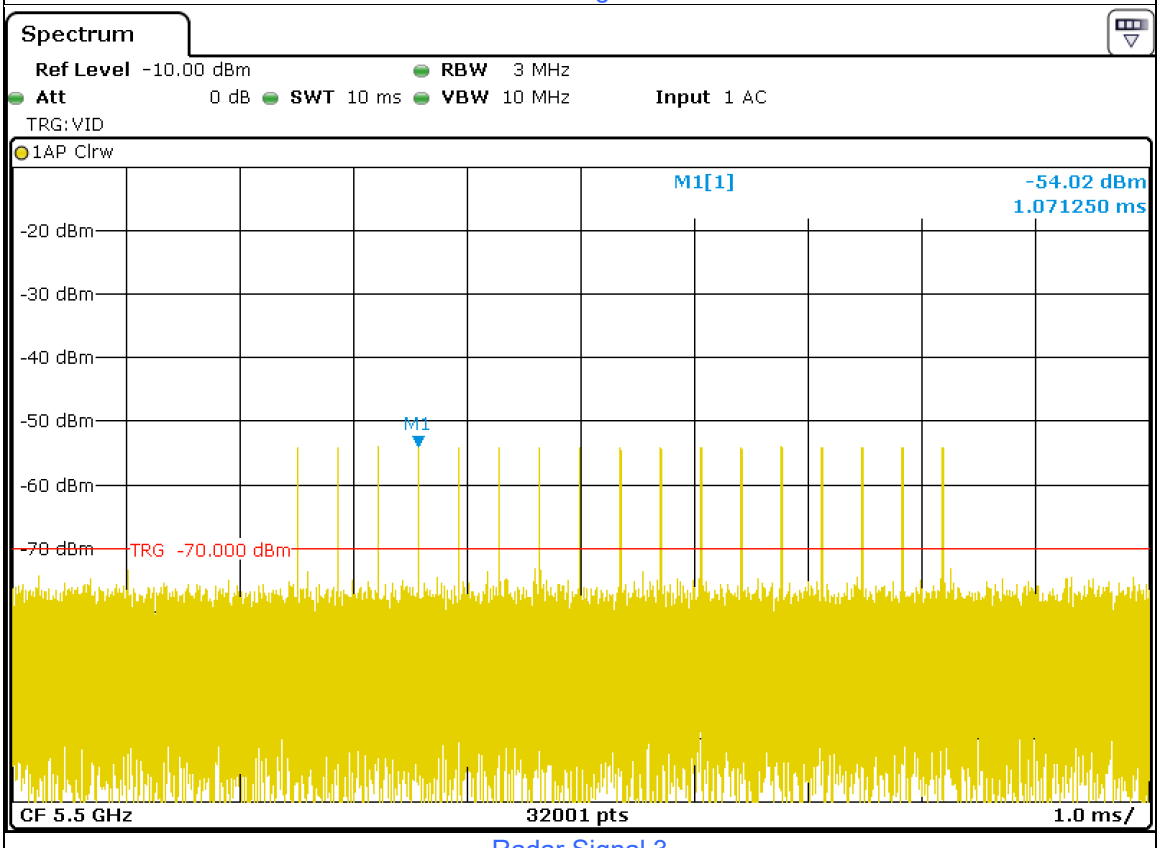


Radar Signal 3

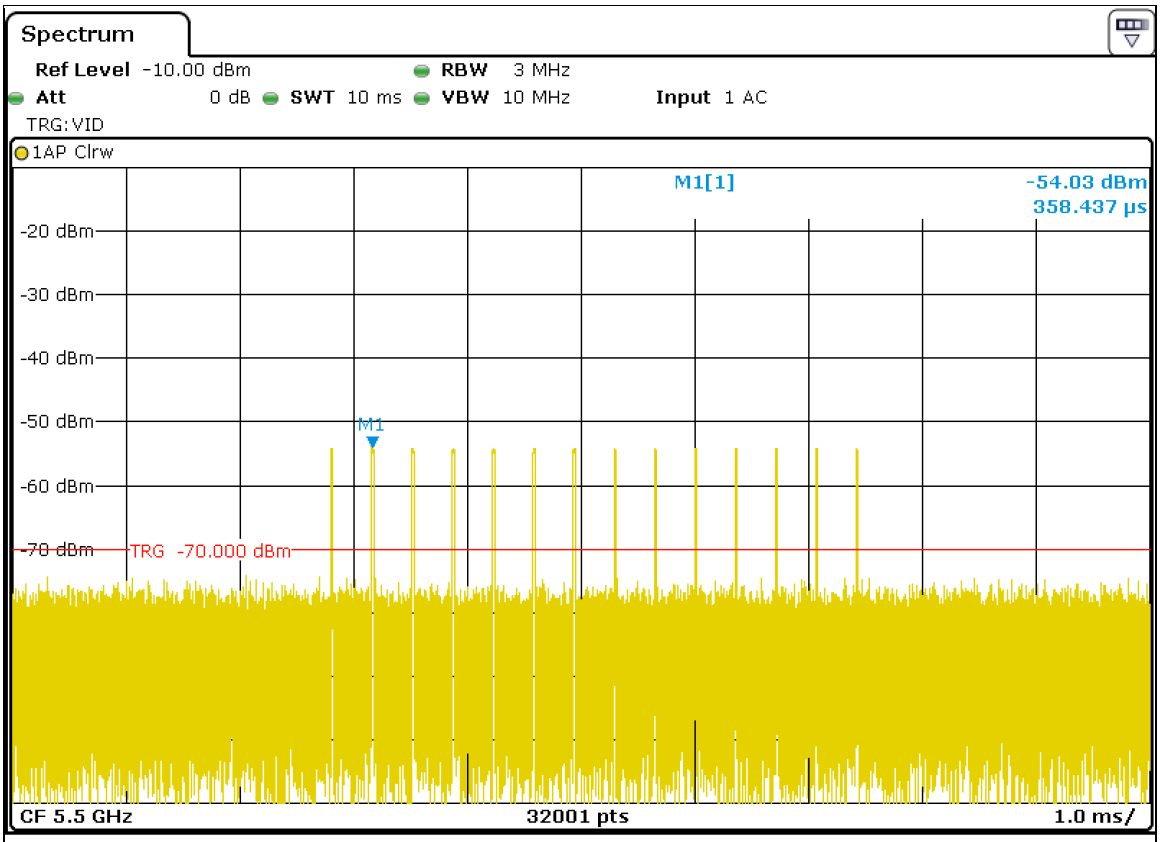


Radar Signal 4

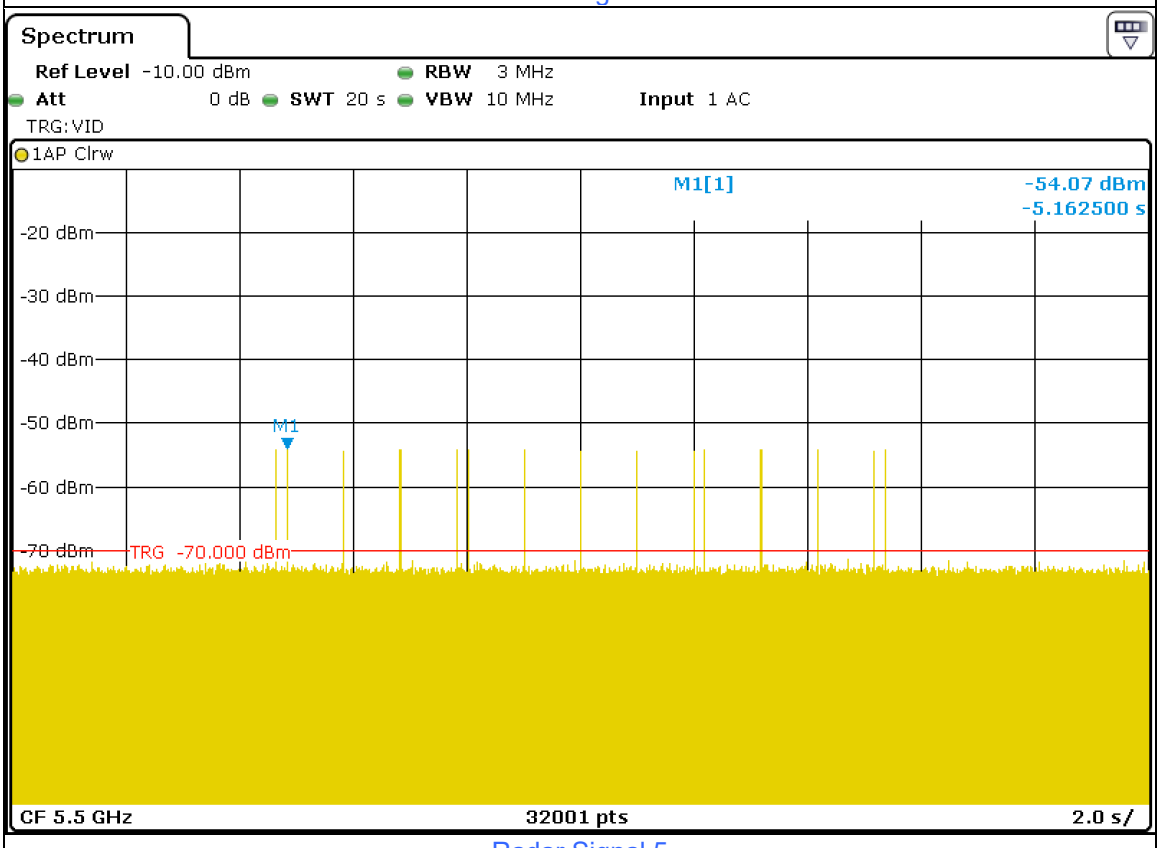

Radar Signal 5

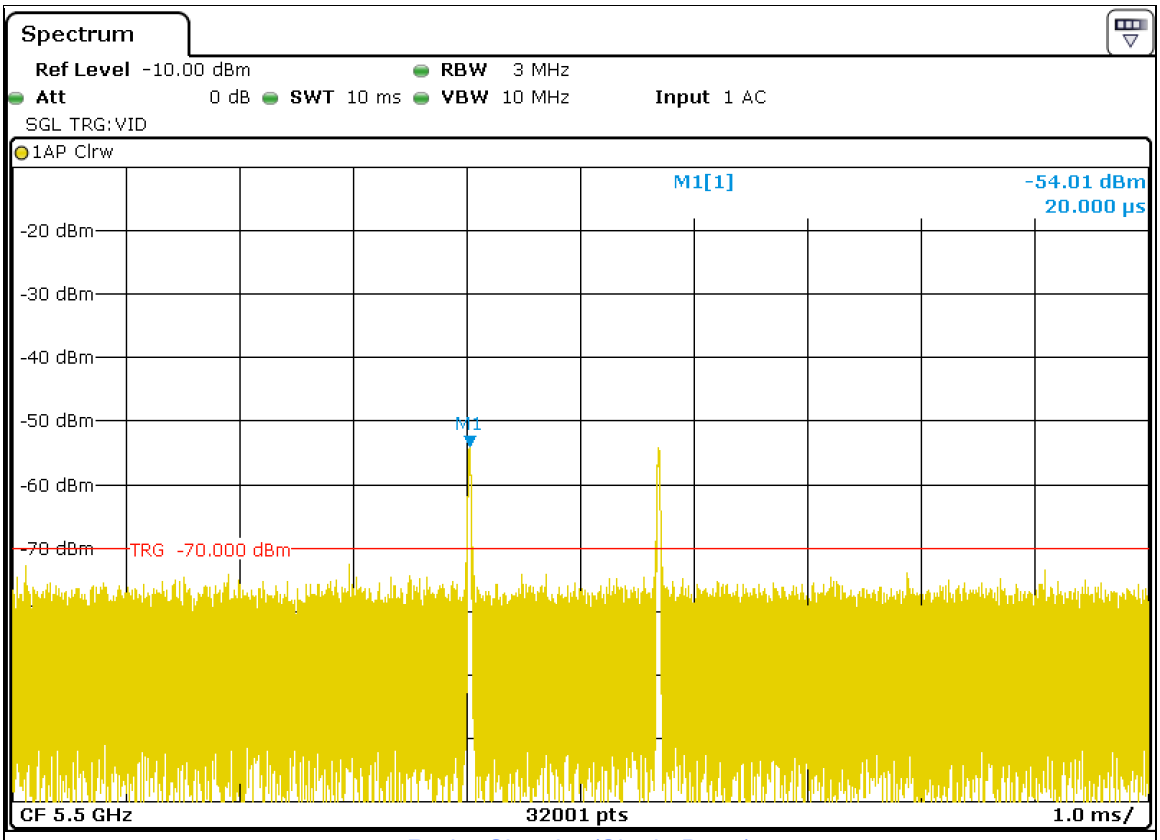

Radar Signal 5 (Single Burst)

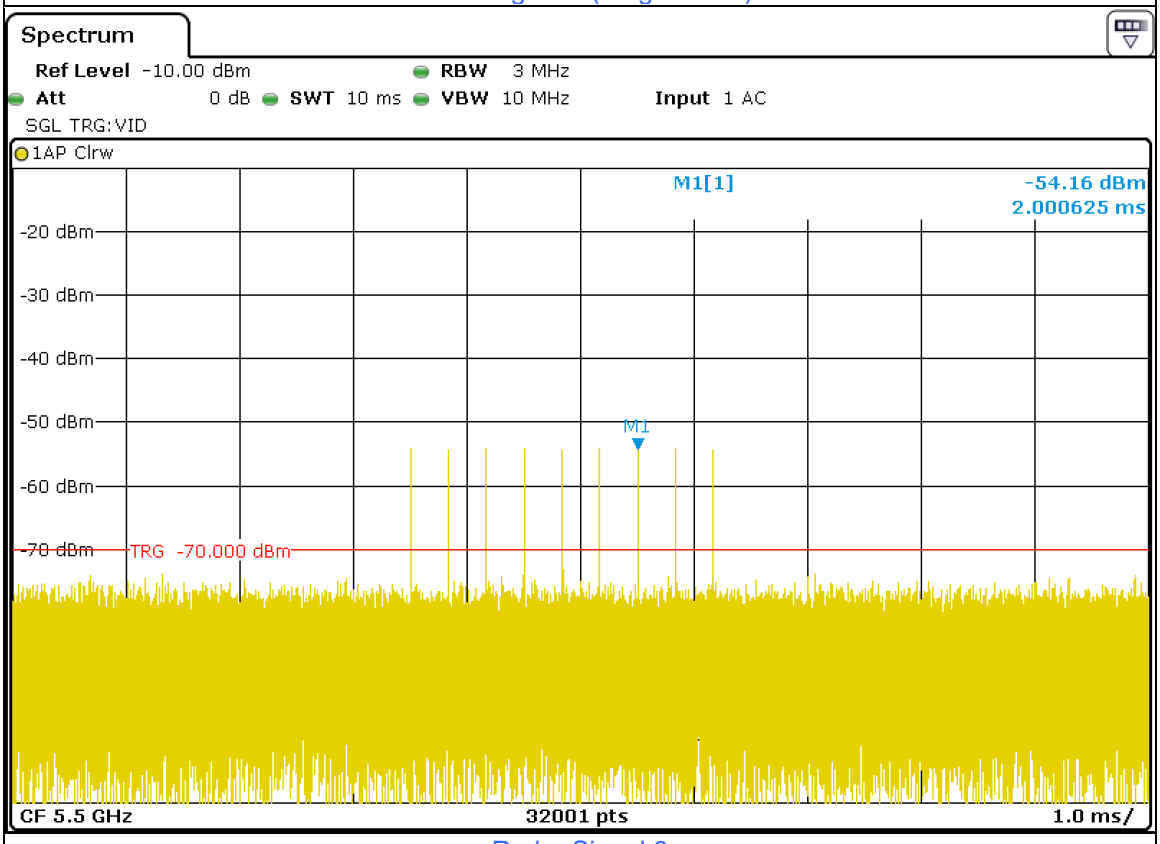

Radar Signal 6

6.2.4 DFS Companion Device

External

Client without radar detection

Companion Device Information					
Product	**Brand**	**Model No.**	**FCC ID**	**Specification**	**Software/Firmware Version**
BE5000 Dual-Band PoE 2.5G Insight Managed WiFi 7 Outdoor Access Point	NETGEAR	WBE700Y	PY325100647	5G Ant gain : 2.68dBi Maximum EIRP : 29.57dBm	OpenWrt 23.05-SNAPSHOT r0+24216-d20243d5a / LuCI openwrt-23.05 branch git-24.034.54904-39d1aee

Note: This device was functioned as a Master device during the DFS test.

External

Master

Companion Device Information					
Product	**Brand**	**Model No.**	**FCC ID**	**Specification**	**Software/Firmware Version**
BE5000 Dual-Band PoE 2.5G Insight Managed WiFi 7 Outdoor Access Point	NETGEAR	WBE700Y	PY325100647	5G Ant gain : 2.68dBi Maximum EIRP : 29.57dBm	OpenWrt 23.05-SNAPSHOT r0+24216-d20243d5a / LuCI openwrt-23.05 branch git-24.034.54904-39d1aee

Note: This device was functioned as a Slave device during the DFS test.

Internal

Client without radar detection

Companion Device Information					
Product	**Brand**	**Model No.**	**FCC ID**	**Specification**	**Software/Firmware Version**
BE5000 Dual-Band PoE 2.5G Insight Managed WiFi 7 Outdoor Access Point	NETGEAR	WBE700Y	PY325100647	5G Ant gain : 10.31dBi Maximum EIRP : 29.71dBm	OpenWrt 23.05-SNAPSHOT r0+24216-d20243d5a / LuCI openwrt-23.05 branch git-24.034.54904-39d1aee

Note: This device was functioned as a Master device during the DFS test.

Internal

Master

Companion Device Information					
Product	**Brand**	**Model No.**	**FCC ID**	**Specification**	**Software/Firmware Version**
BE5000 Dual-Band PoE 2.5G Insight Managed WiFi 7 Outdoor Access Point	NETGEAR	WBE700Y	PY325100647	5G Ant gain : 10.31dBi Maximum EIRP : 29.71dBm	OpenWrt 23.05-SNAPSHOT r0+24216-d20243d5a / LuCI openwrt-23.05 branch git-24.034.54904-39d1aee

Note: This device was functioned as a Slave device during the DFS test.

7 Test Results of Test Item

7.1 U-NII Detection Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih

External


Master

For 802.11be (EHT20)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5500 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 18.97 MHz Detection bandwidth (5510 MHz (FH) – 5490 MHz (FL)): 20 MHz													
Radar Frequency (MHz)	**Trial Number / Detection**										**Detection Probability**	**Minimum Percentage of Successful Detection**	**Test Result**
	#01	**#02**	**#03**	**#04**	**#05**	**#06**	**#07**	**#08**	**#09**	**#10**			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

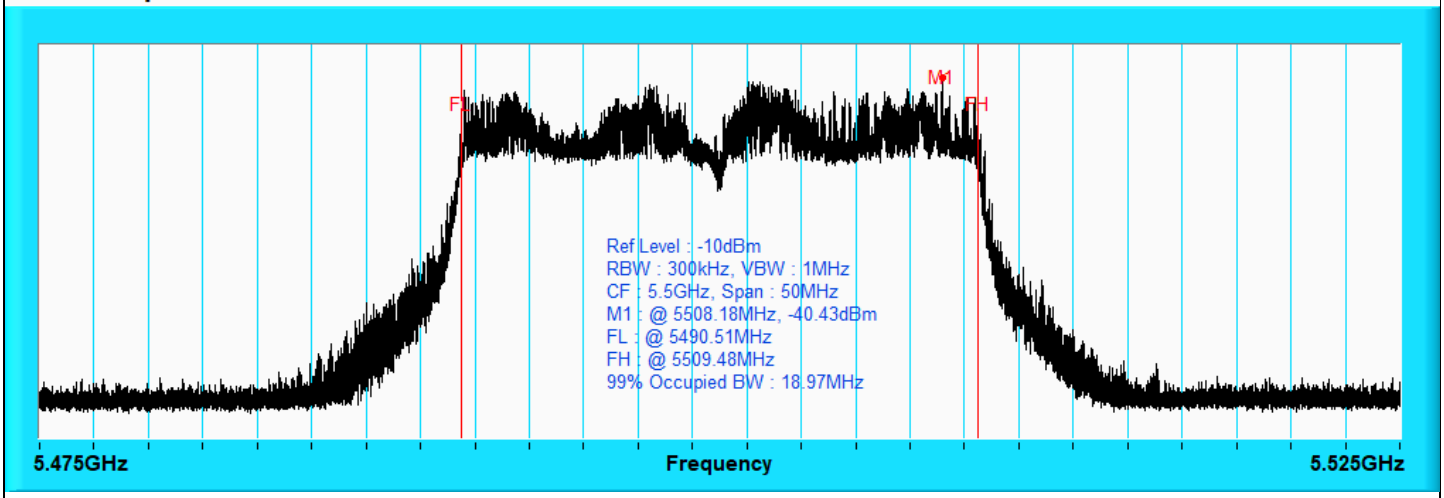


802.11be (EHT20)

802.11be (EHT40)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5510 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 38.17 MHz Detection bandwidth (5530 MHz (FH) – 5490 MHz (FL)): 40 MHz													
Radar Frequency (MHz)	**Trial Number / Detection**										**Detection Probability**	**Minimum Detection Limit**	**Test Result**
	#01	**#02**	**#03**	**#04**	**#05**	**#06**	**#07**	**#08**	**#09**	**#10**			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

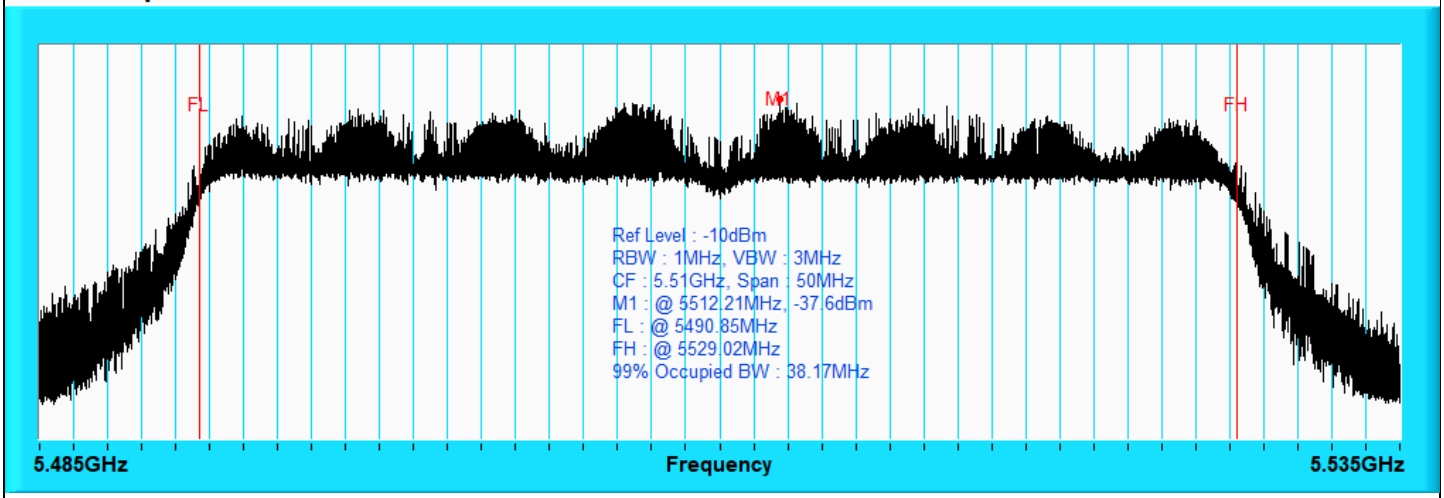


802.11be (EHT40)

802.11be (EHT80)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5530 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 77.48 MHz Detection bandwidth (5570 MHz (FH) – 5490 MHz (FL)): 80 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

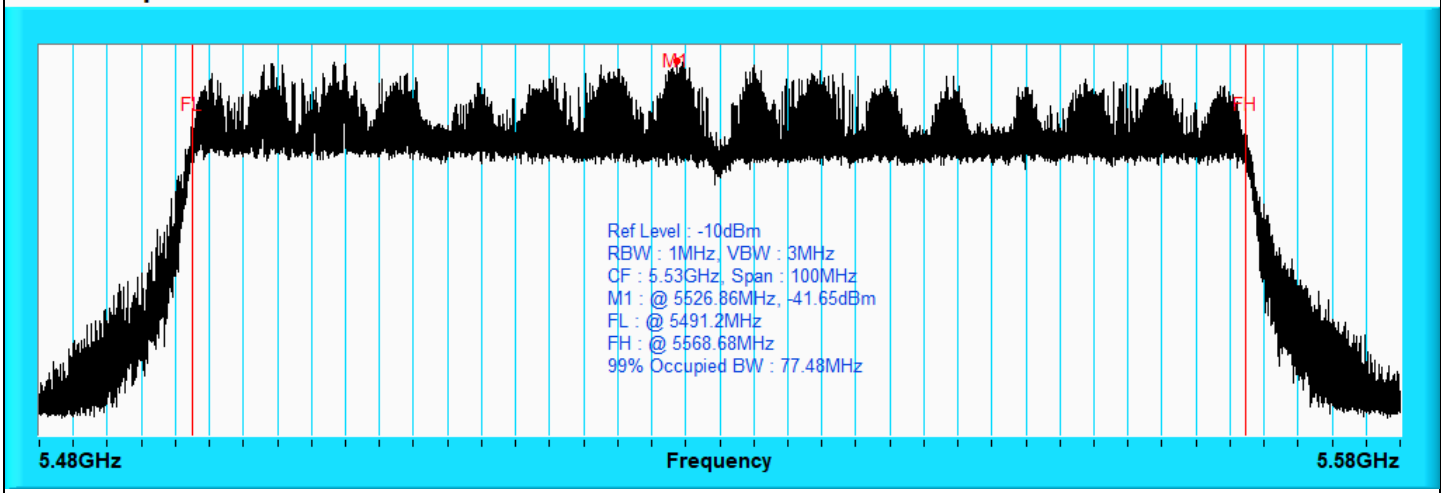


802.11be (EHT80)

802.11be (EHT160) CH50

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5250 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 156.51 MHz Detection bandwidth (5330 MHz (FH) – 5250 MHz (FL)): 80 MHz (160 MHz channel (5250 MHz) straddle between 5150 ~ 5250 MHz and 5250 ~ 5350 MHz, the DFS ability is necessary in 5250 ~ 5350 MHz, therefore DFS detection bandwidth start from 5250 MHz for 802.11be (EHT160) mode.)													
Radar Frequency (MHz)	**Trial Number / Detection**										**Detection Probability**	**Minimum Detection Limit**	**Test Result**
	#01	**#02**	**#03**	**#04**	**#05**	**#06**	**#07**	**#08**	**#09**	**#10**			
5250 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5255	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5260	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5265	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5270	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5275	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5280	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5285	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5290	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5295	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5300	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5305	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5310	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5315	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5320	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5325	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5330 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth


UUT Occupied Bandwidth

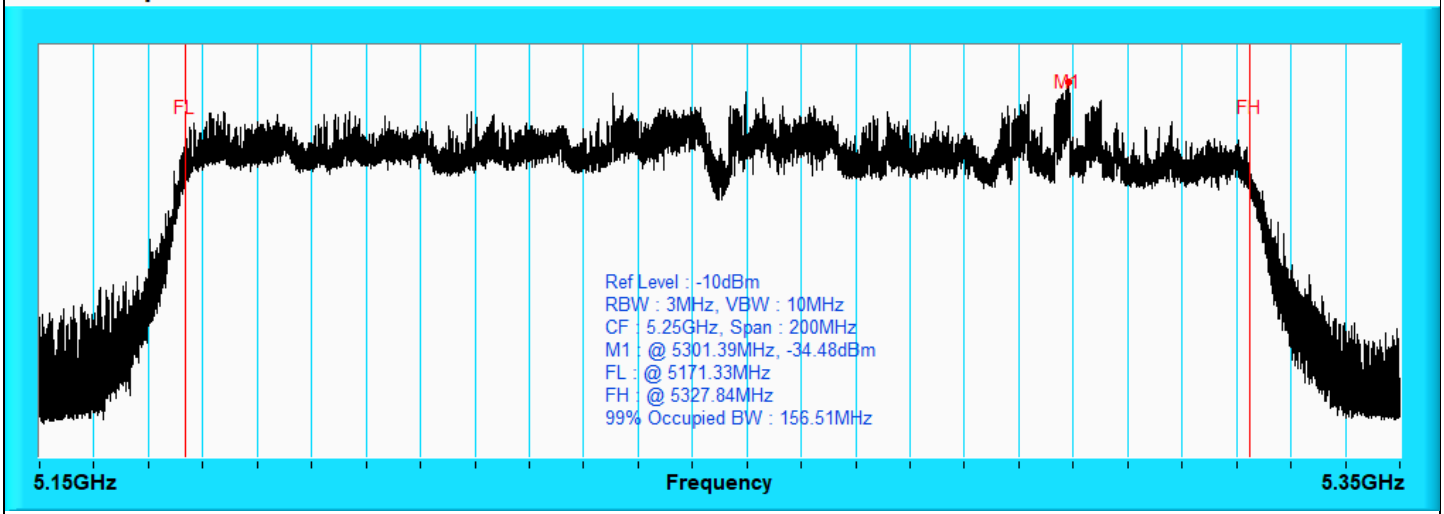

802.11be (EHT160) CH50

802.11be (EHT160) CH114

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5570 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 157.4 MHz Detection bandwidth (5650 MHz (FH) – 5490 MHz (FL)): 160 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5650 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

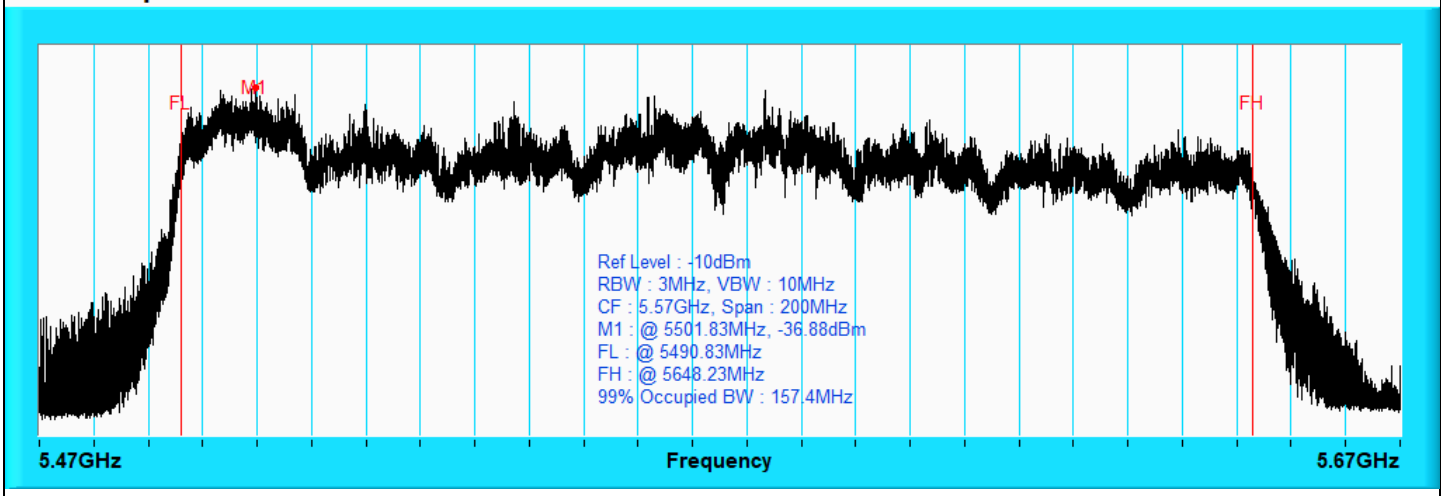Plots of 99% Power bandwidth
UUT Occupied Bandwidth

802.11be (EHT160) CH114


802.11be (EHT240)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5610 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 233.64 MHz Detection bandwidth (5725 MHz (FH) – 5490 MHz (FL)): 235 MHz (240 MHz channel (5610 MHz) straddle between 5470 ~ 5725 MHz and 5725 ~ 5850 MHz, the DFS ability is necessary in 5470 ~ 5725 MHz, therefore DFS detection bandwidth end of 5725 MHz for 802.11be (EHT240) mode.)													
Radar Frequency (MHz)	**Trial Number / Detection**										**Detection Probability**	**Minimum Detection Limit**	**Test Result**
	#01	**#02**	**#03**	**#04**	**#05**	**#06**	**#07**	**#08**	**#09**	**#10**			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5650	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5655	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

5660	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5665	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5670	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5675	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5680	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5685	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5690	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5695	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5700	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5705	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5710	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5715	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5720	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5725 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

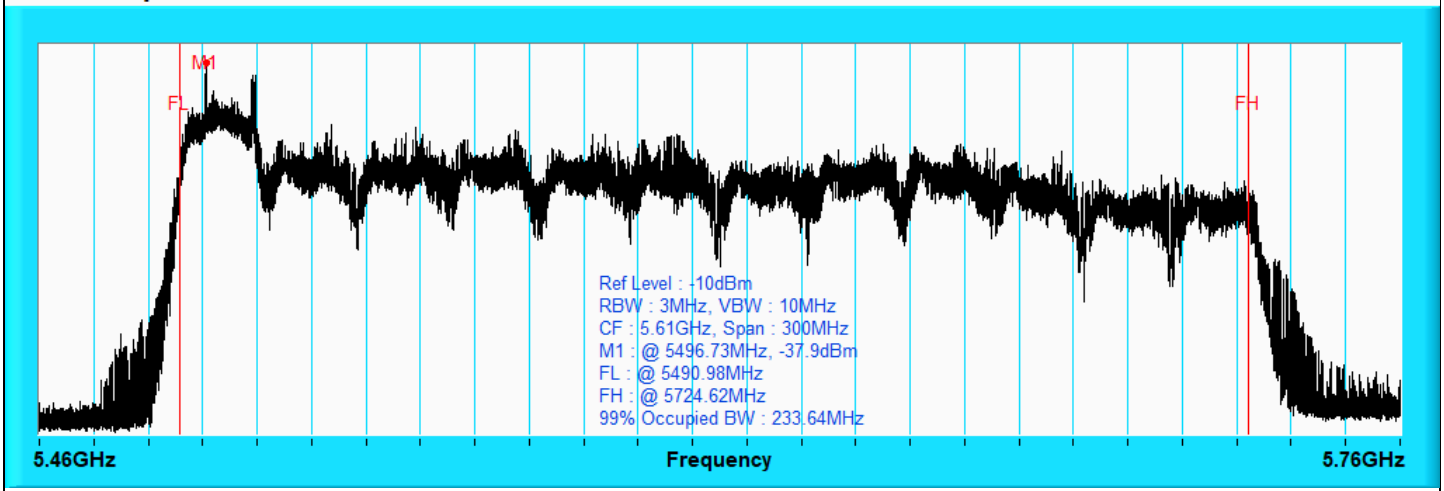

802.11be (EHT240)

Internal


Master

For 802.11be (EHT20)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5500 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 19.07 MHz Detection bandwidth (5510 MHz (FH) – 5490 MHz (FL)): 20 MHz													
Radar Frequency (MHz)	**Trial Number / Detection**										**Detection Probability**	**Minimum Percentage of Successful Detection**	**Test Result**
	#01	**#02**	**#03**	**#04**	**#05**	**#06**	**#07**	**#08**	**#09**	**#10**			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

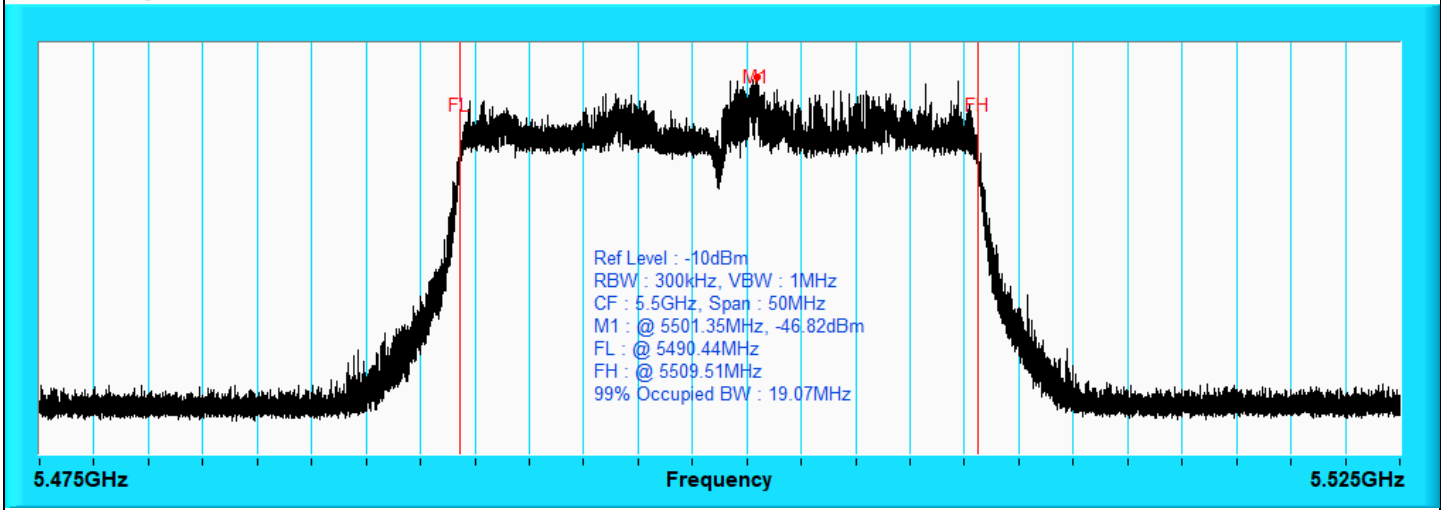


802.11be (EHT20)

802.11be (EHT40)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5510 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 38.32 MHz Detection bandwidth (5530 MHz (FH) – 5490 MHz (FL)): 40 MHz													
Radar Frequency (MHz)	**Trial Number / Detection**										**Detection Probability**	**Minimum Detection Limit**	**Test Result**
	#01	**#02**	**#03**	**#04**	**#05**	**#06**	**#07**	**#08**	**#09**	**#10**			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

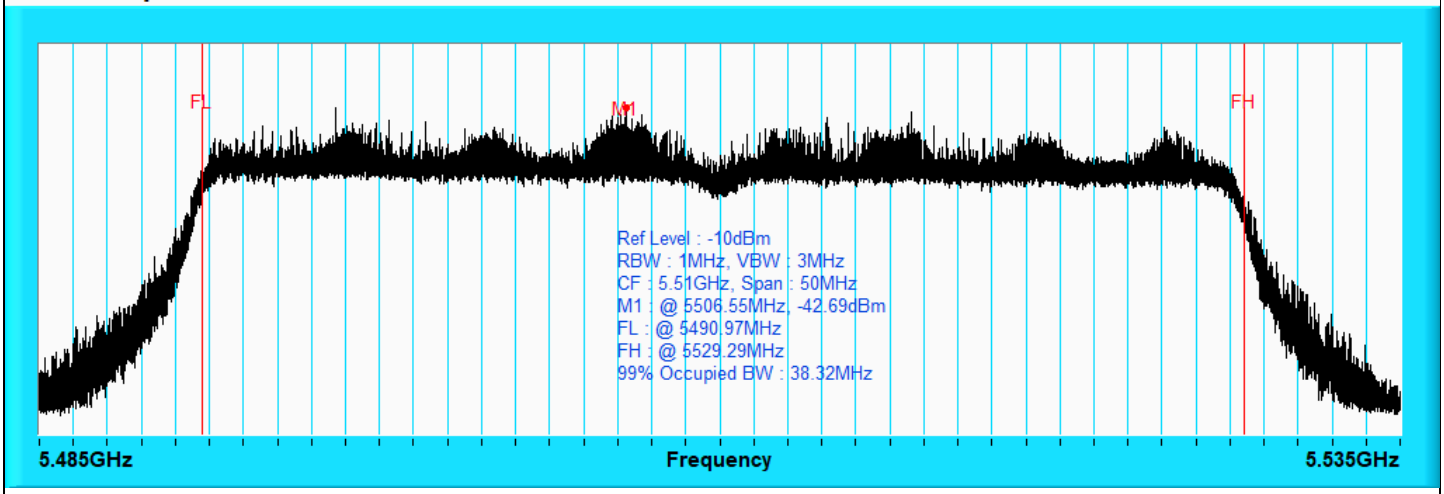


802.11be (EHT40)

802.11be (EHT80)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5530 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 77.65 MHz Detection bandwidth (5570 MHz (FH) – 5490 MHz (FL)): 80 MHz													
Radar Frequency (MHz)	**Trial Number / Detection**										**Detection Probability**	**Minimum Detection Limit**	**Test Result**
	#01	**#02**	**#03**	**#04**	**#05**	**#06**	**#07**	**#08**	**#09**	**#10**			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

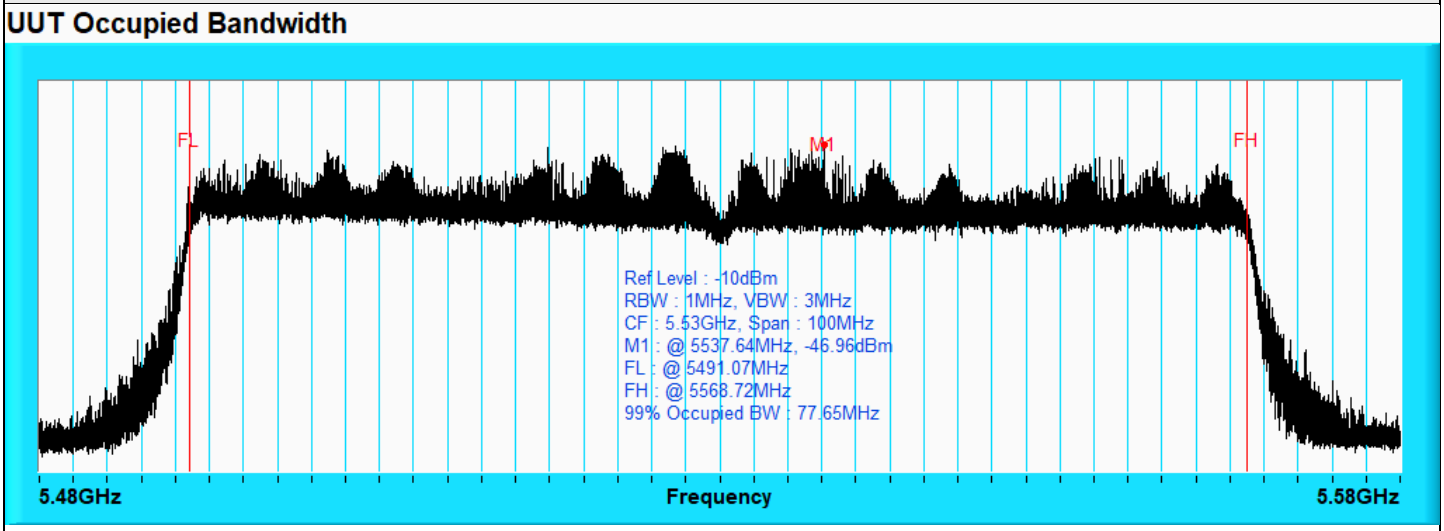


802.11be (EHT80)

802.11be (EHT160) CH50

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5250 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 156.95 MHz Detection bandwidth (5330 MHz (FH) – 5250 MHz (FL)): 80 MHz (160 MHz channel (5250 MHz) straddle between 5150 ~ 5250 MHz and 5250 ~ 5350 MHz, the DFS ability is necessary in 5250 ~ 5350 MHz, therefore DFS detection bandwidth start from 5250 MHz for 802.11be (EHT160) mode.)													
Radar Frequency (MHz)	**Trial Number / Detection**										**Detection Probability**	**Minimum Detection Limit**	**Test Result**
	#01	**#02**	**#03**	**#04**	**#05**	**#06**	**#07**	**#08**	**#09**	**#10**			
5250 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5255	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5260	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5265	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5270	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5275	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5280	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5285	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5290	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5295	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5300	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5305	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5310	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5315	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5320	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5325	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5330 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth


UUT Occupied Bandwidth

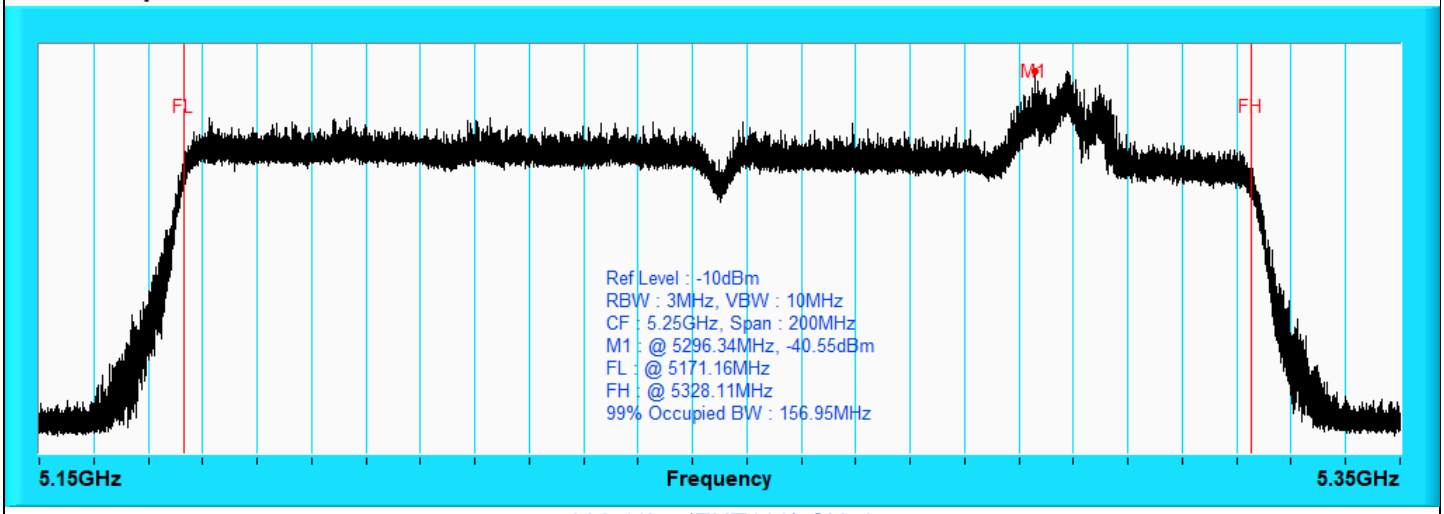

802.11be (EHT160) CH50

802.11be (EHT160) CH114

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5570 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 157.75 MHz Detection bandwidth (5650 MHz (FH) – 5490 MHz (FL)): 160 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5650 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

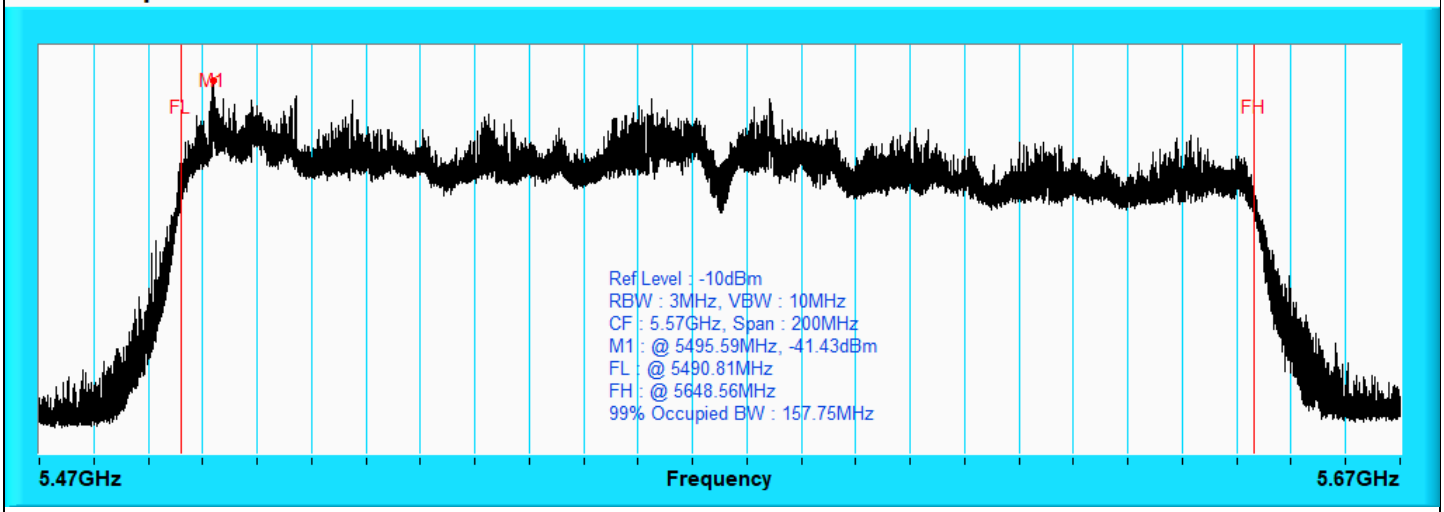Plots of 99% Power bandwidth
UUT Occupied Bandwidth

802.11be (EHT160) CH114


802.11be (EHT240)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5610 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 234.03 MHz Detection bandwidth (5725 MHz (FH) – 5490 MHz (FL)): 235 MHz (240 MHz channel (5610 MHz) straddle between 5470 ~ 5725 MHz and 5725 ~ 5850 MHz, the DFS ability is necessary in 5470 ~ 5725 MHz, therefore DFS detection bandwidth end of 5725 MHz for 802.11be (EHT240) mode.)													
Radar Frequency (MHz)	**Trial Number / Detection**										**Detection Probability**	**Minimum Detection Limit**	**Test Result**
	#01	**#02**	**#03**	**#04**	**#05**	**#06**	**#07**	**#08**	**#09**	**#10**			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5650	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5655	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

5660	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5665	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5670	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5675	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5680	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5685	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5690	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5695	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5700	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5705	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5710	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5715	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5720	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5725 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

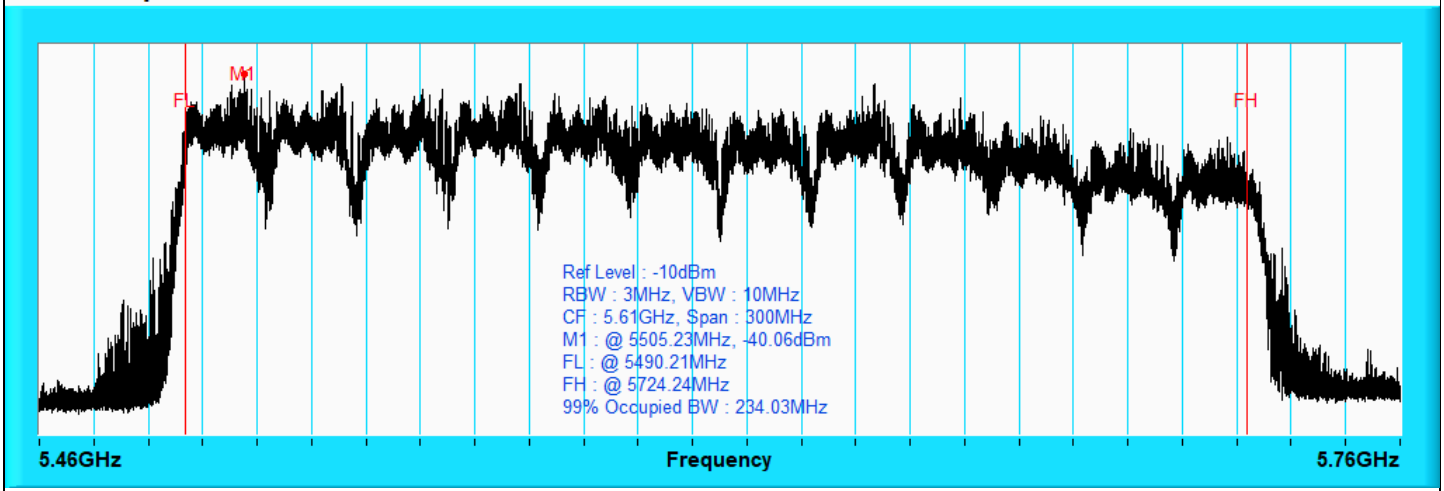

802.11be (EHT240)

7.2 Channel Availability Check Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih

External


Master

If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.

Timing of Radar Signal	Observation	
	EUT	Spectrum Analyzer
Within 0 to 6 seconds	Detected	No transmissions
Within 54 to 60 seconds	Detected	No transmissions


Note: Worst case channel for final “Channel Availability Check” test.

Initial Channel Availability Check Time

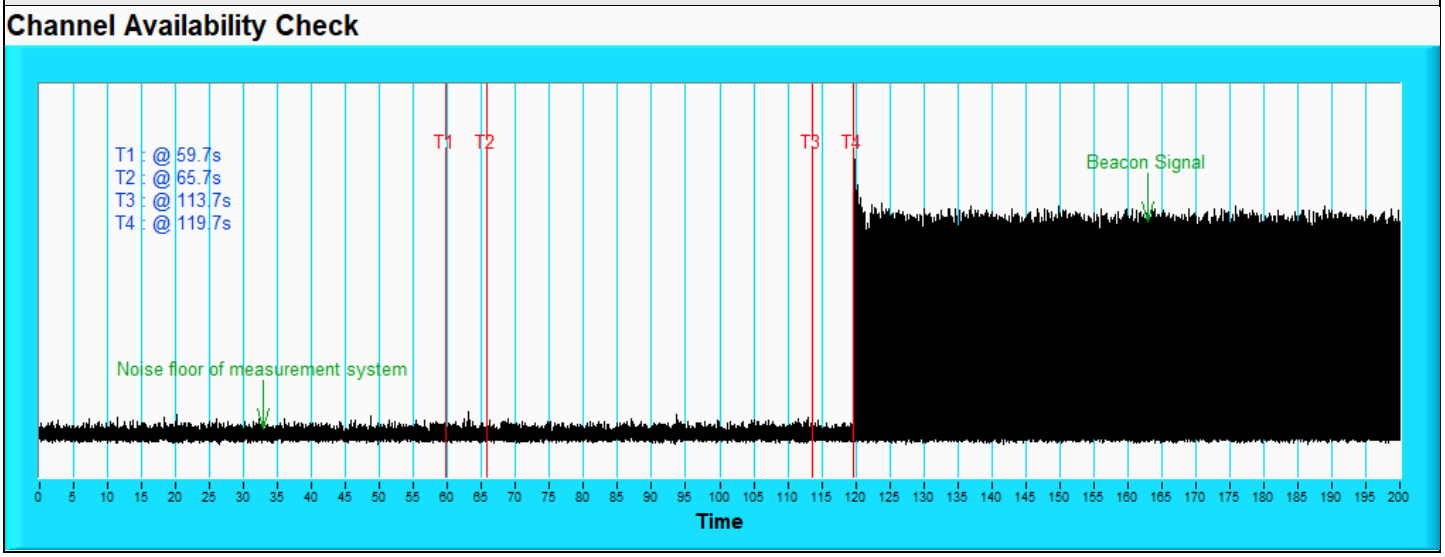


Note: T1 denotes the end of power-up time period is 59.7th second. T4 denotes the end of Channel Availability Check time is 119.7th second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

Radar Burst at the Beginning of the Channel Availability Check Time

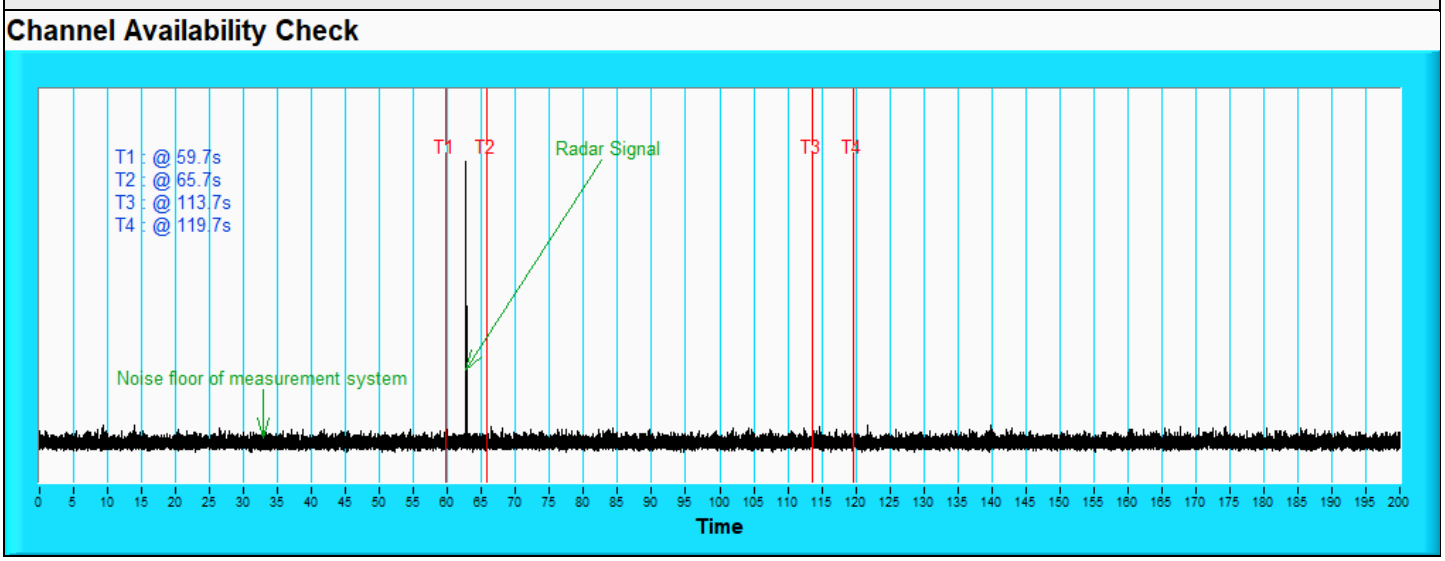

Note: T1 denotes the end of power-up time period is 59.7th second. T2 denotes 65.7th second and the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 119.7th second.

Radar Burst at the End of the Channel Availability Check Time

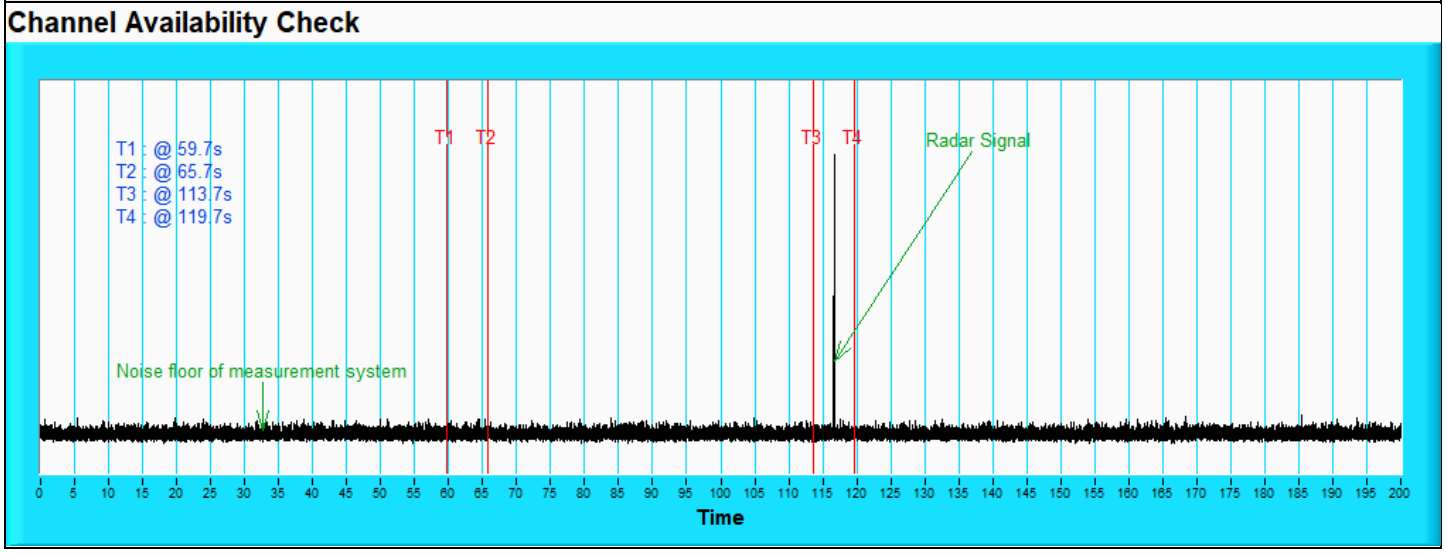

Note: T1 denotes the end of power-up time period is 59.7th second. T3 denotes 113.7th second and the radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence. T4 denotes the 119.7th second.

Internal


Master

If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.

Timing of Radar Signal	Observation	
	EUT	Spectrum Analyzer
Within 0 to 6 seconds	Detected	No transmissions
Within 54 to 60 seconds	Detected	No transmissions


Note: Worst case channel for final “Channel Availability Check” test.

Initial Channel Availability Check Time

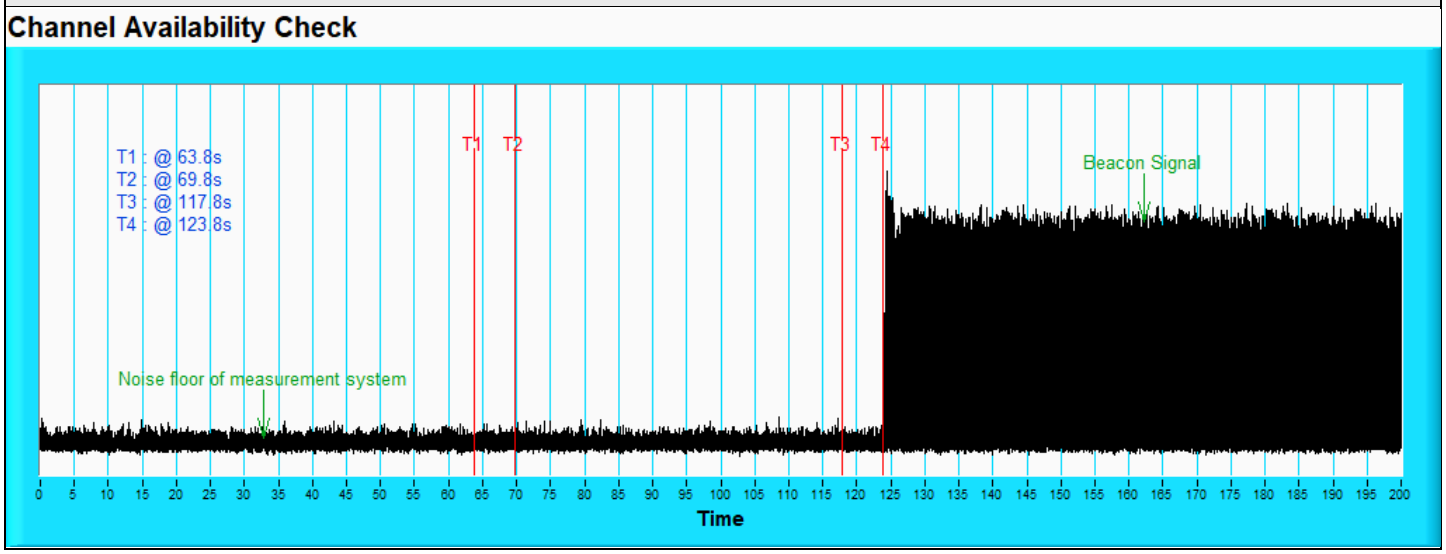


Note: T1 denotes the end of power-up time period is 63.8th second. T4 denotes the end of Channel Availability Check time is 123.8th second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

Radar Burst at the Beginning of the Channel Availability Check Time

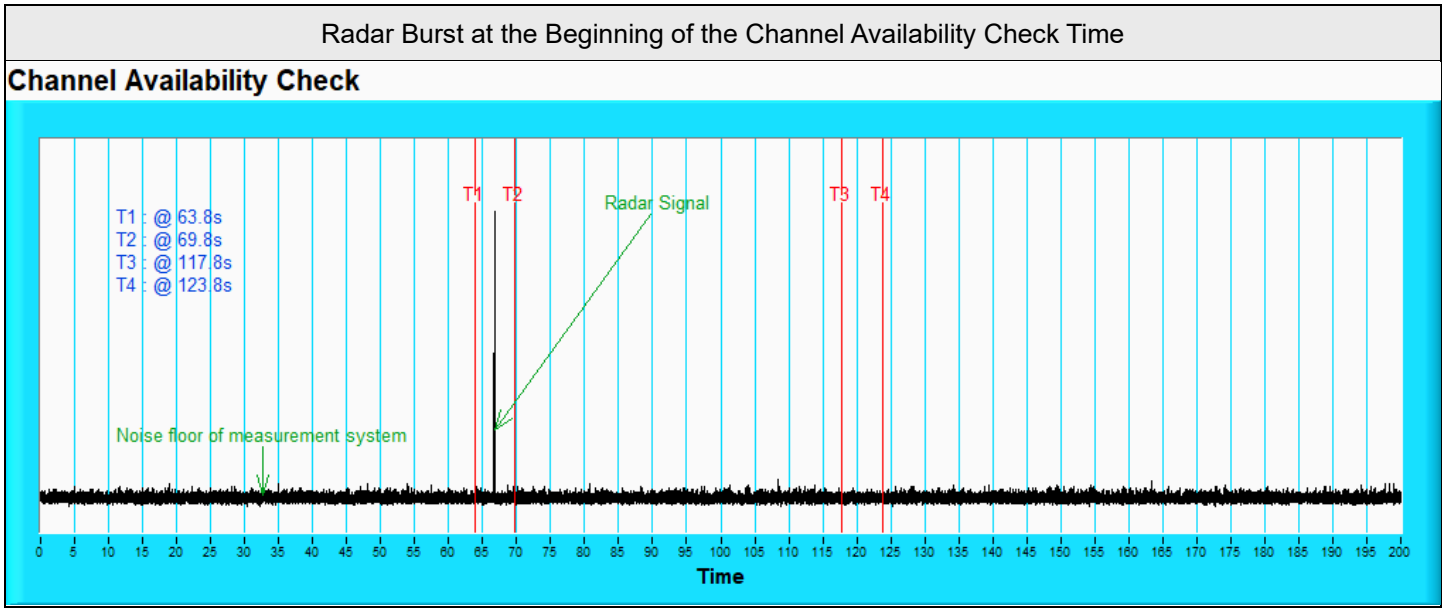

Note: T1 denotes the end of power-up time period is 63.8th second. T2 denotes 69.8th second and the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 123.8th second.

Radar Burst at the End of the Channel Availability Check Time

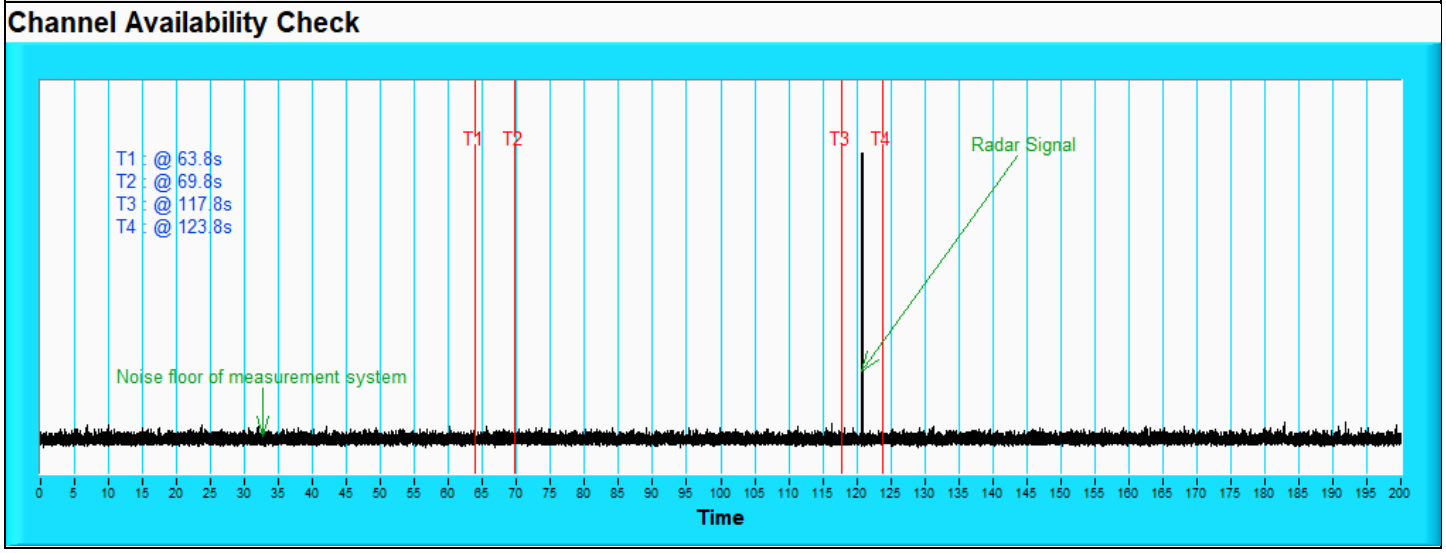

Note: T1 denotes the end of power-up time period is 63.8th second. T3 denotes 117.8th second and the radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence. T4 denotes the 123.8th second.


7.3 Channel Closing Transmission and Channel Move Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih & Neil Yeh


External

Client without radar detection

BW240-Radar signal 0

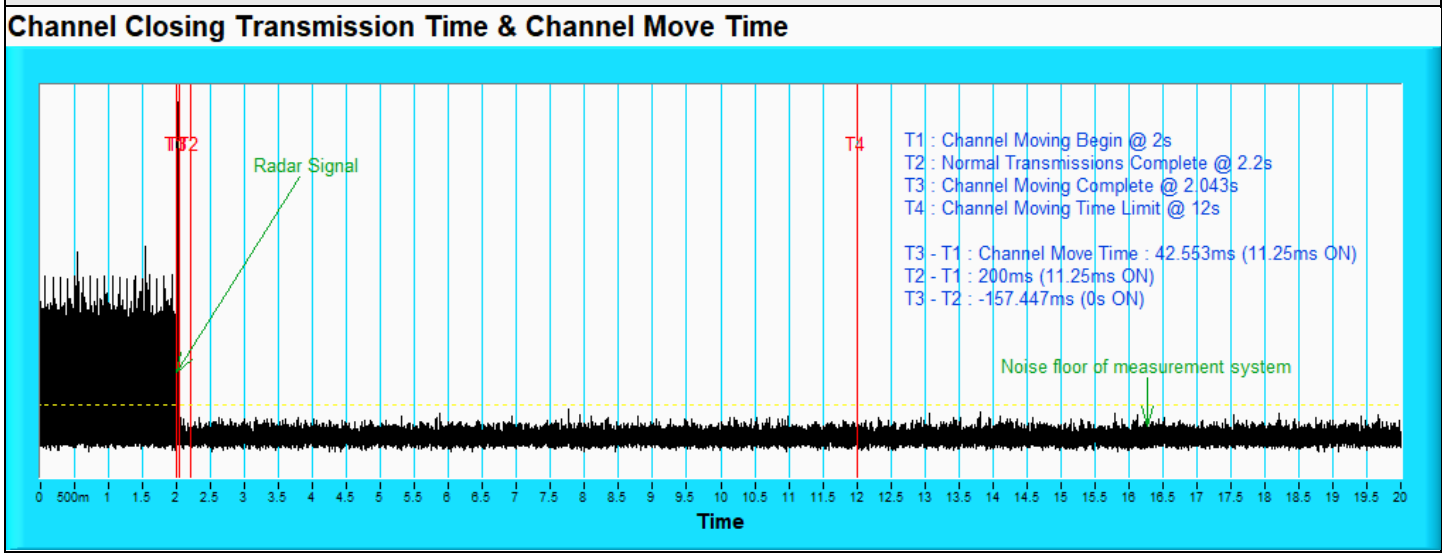

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

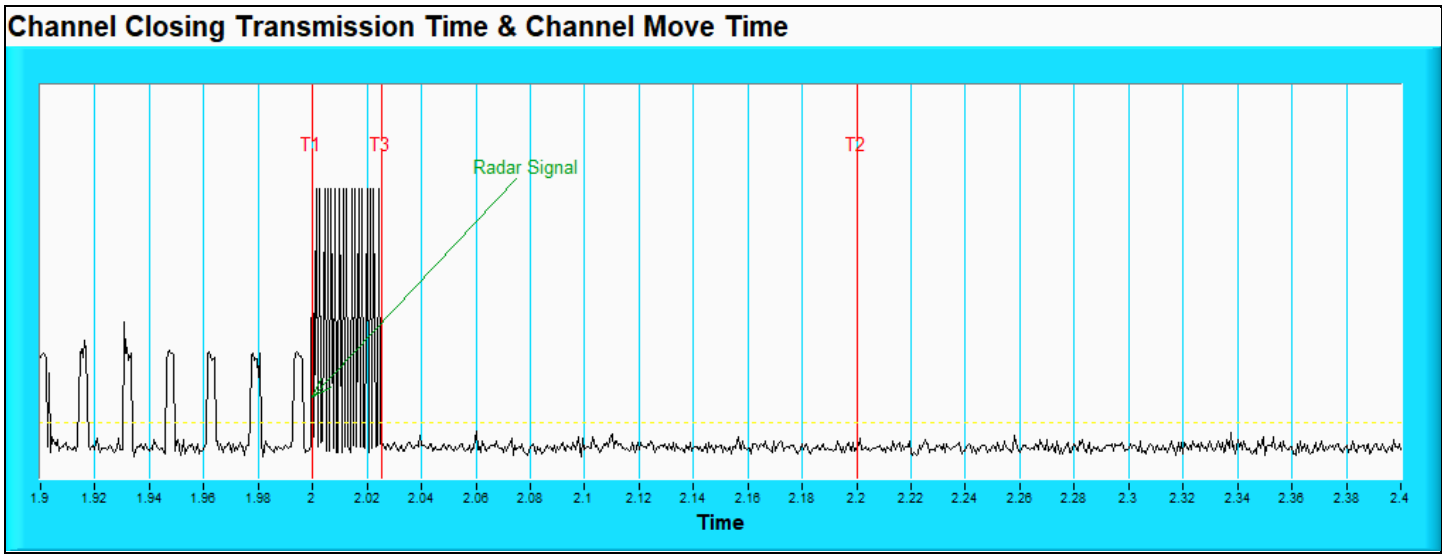


Note: Zoom in of the first 500 ms after radar signal applied.


External

Master

Radar signal 0

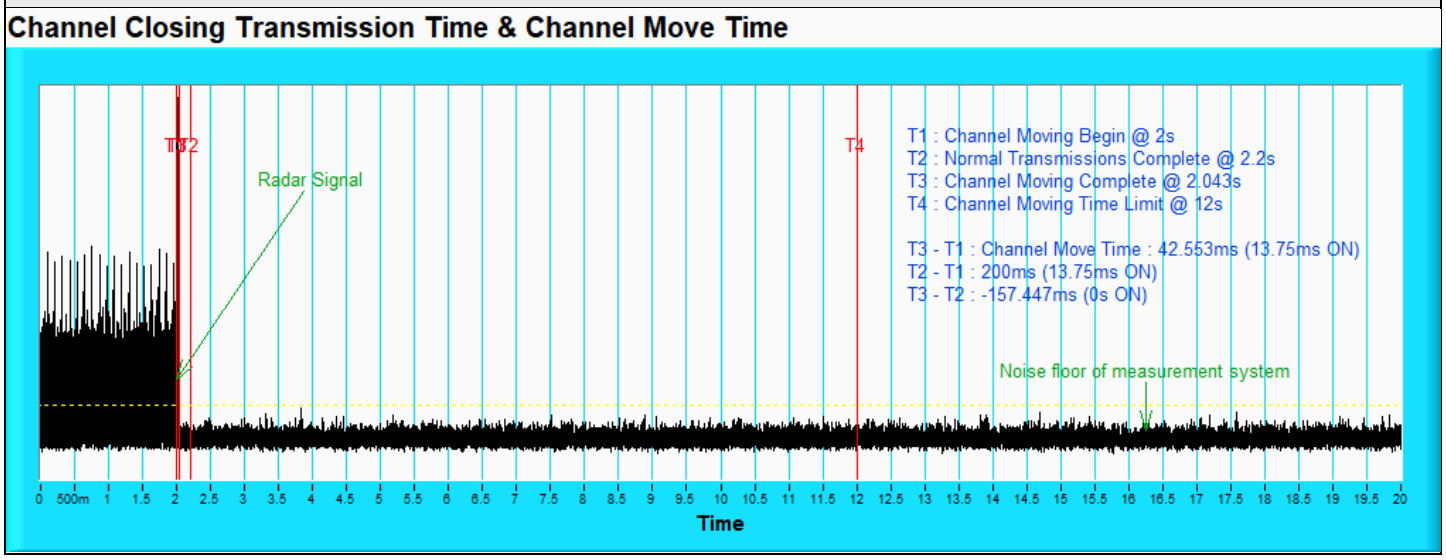


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

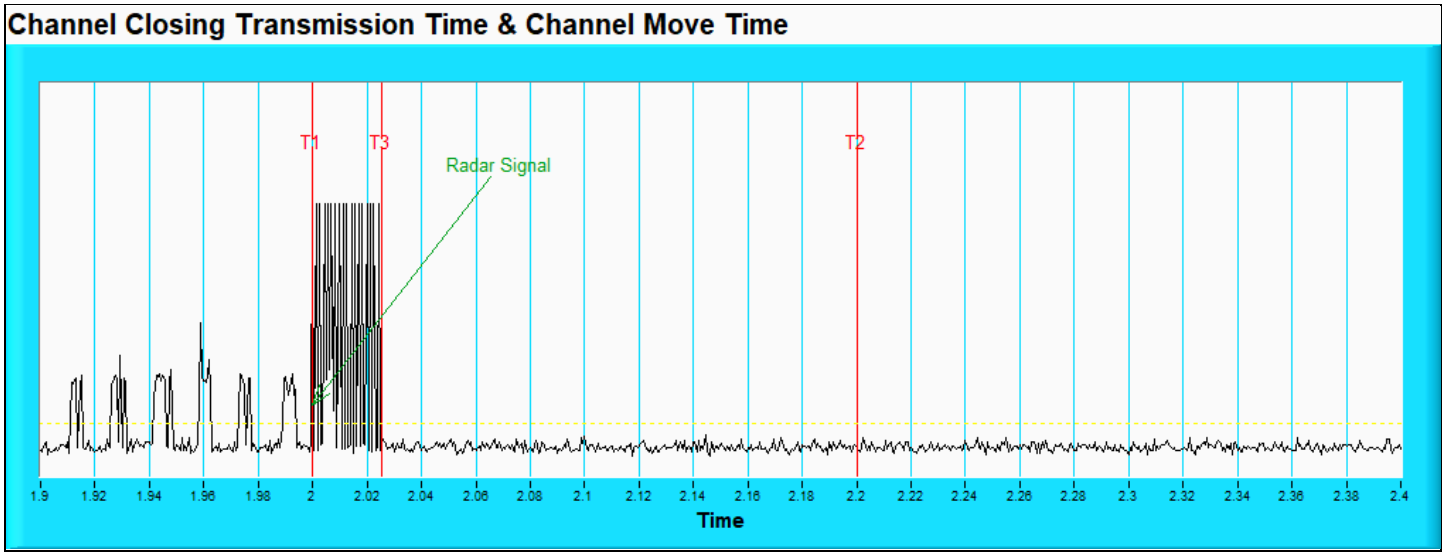


Note: Zoom in of the first 500 ms after radar signal applied.

Radar signal 1

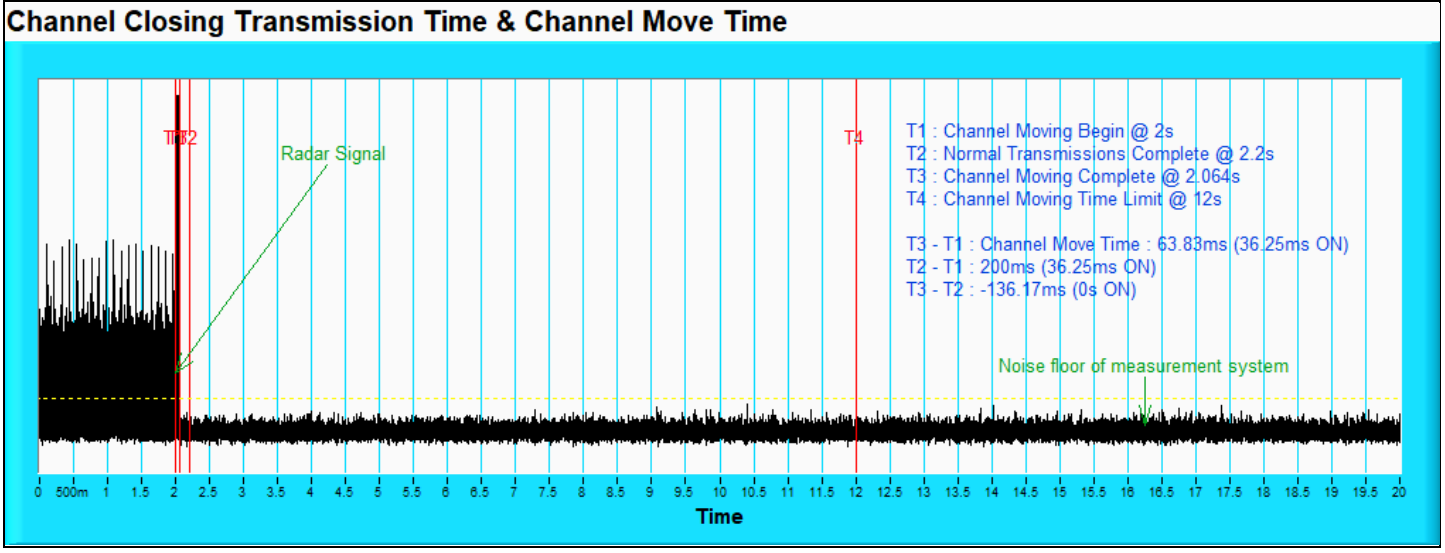


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

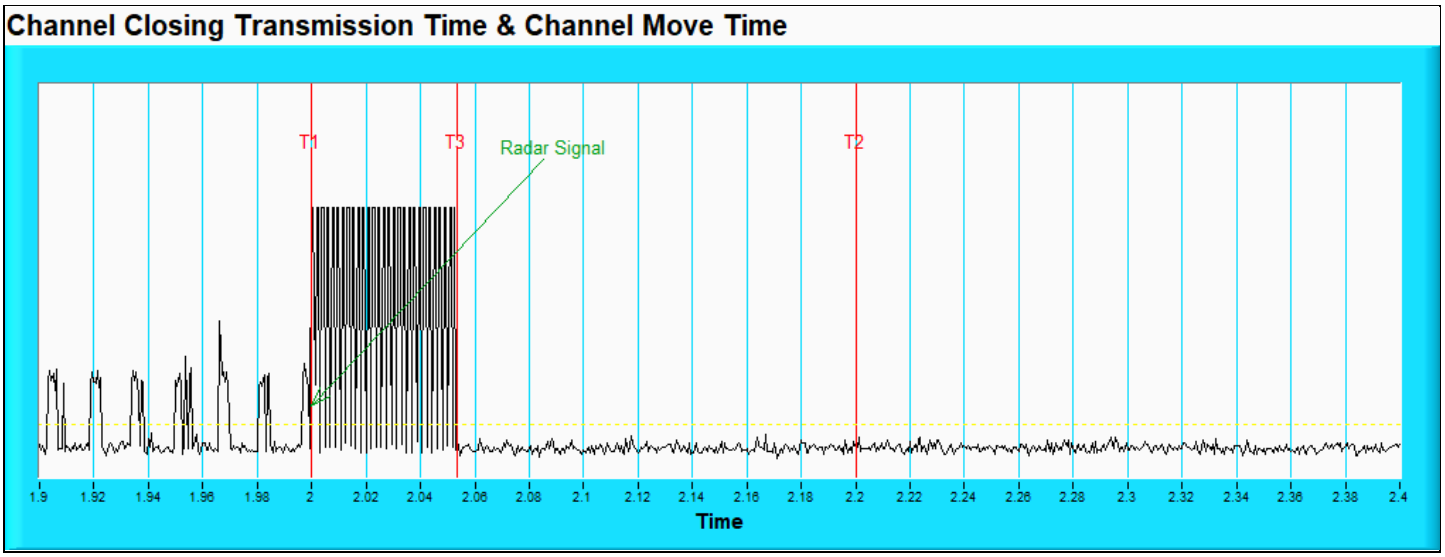


Note: Zoom in of the first 500 ms after radar signal applied.

Radar signal 2

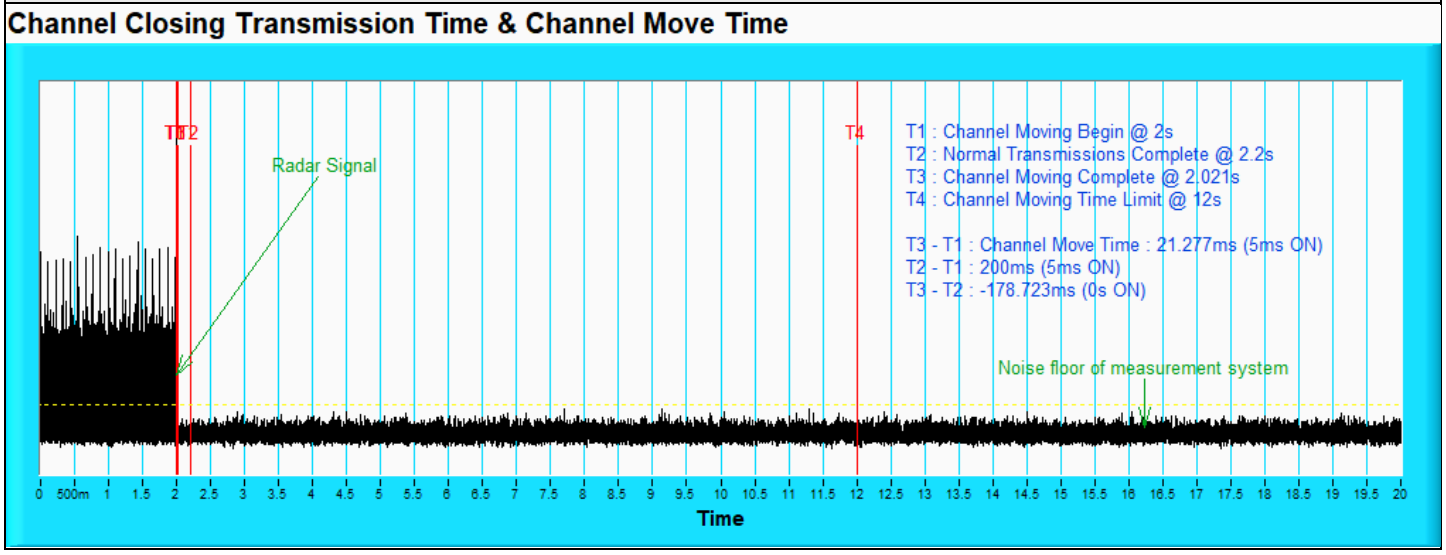


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

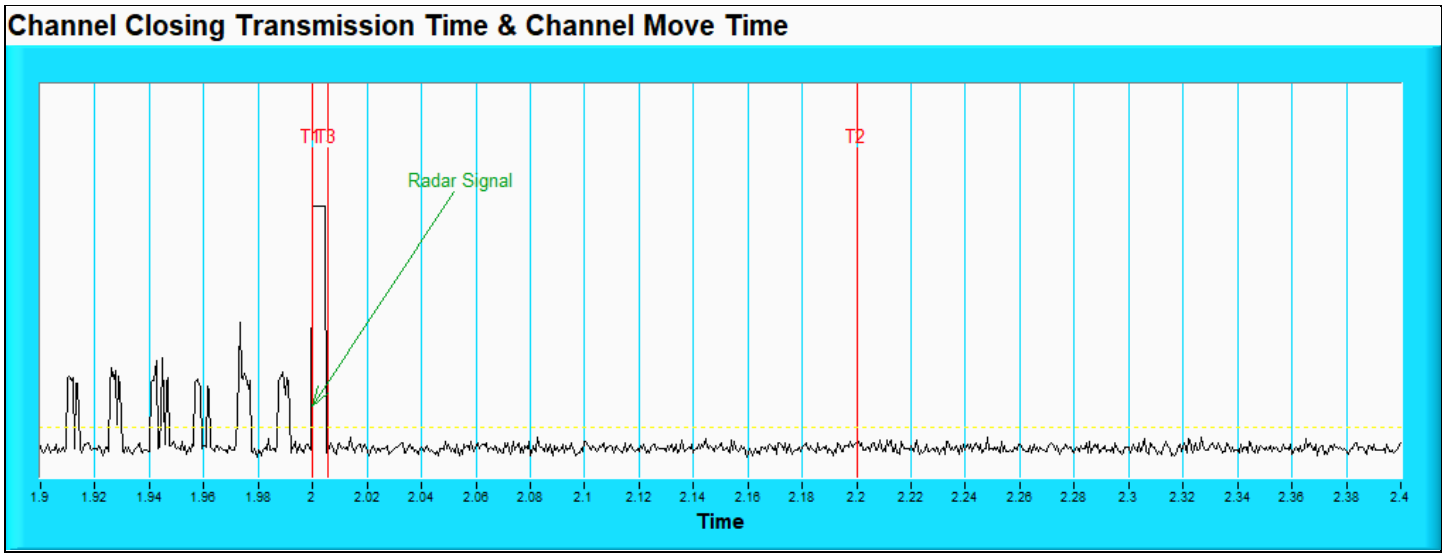


Note: Zoom in of the first 500 ms after radar signal applied.

Radar signal 3

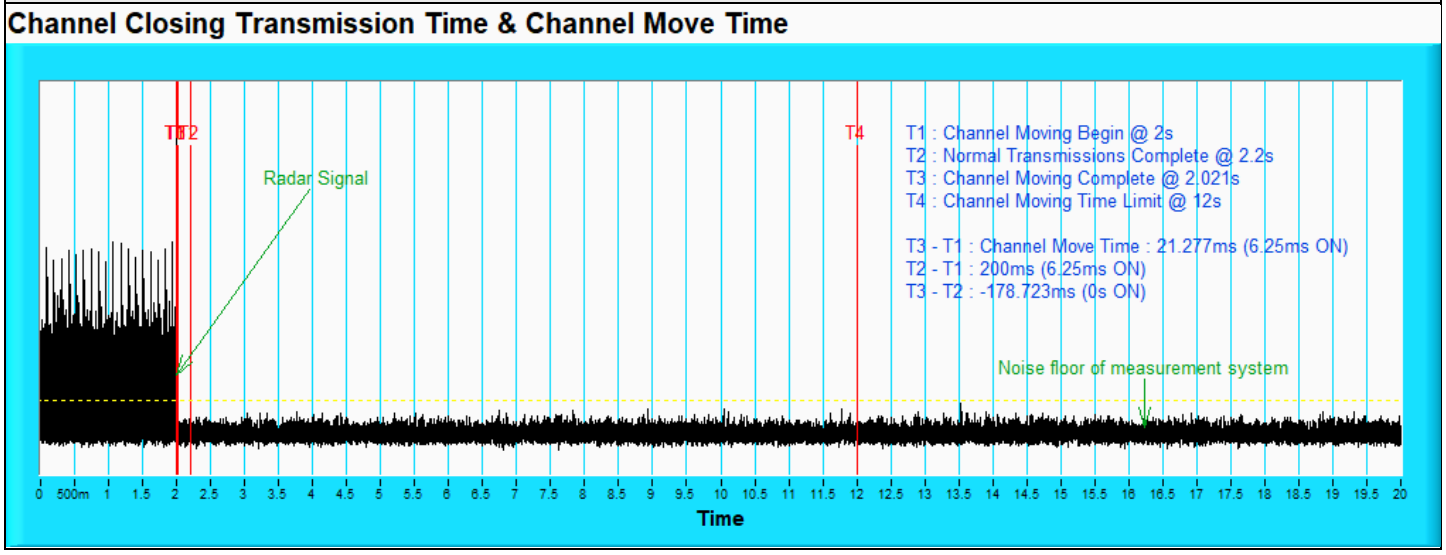


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

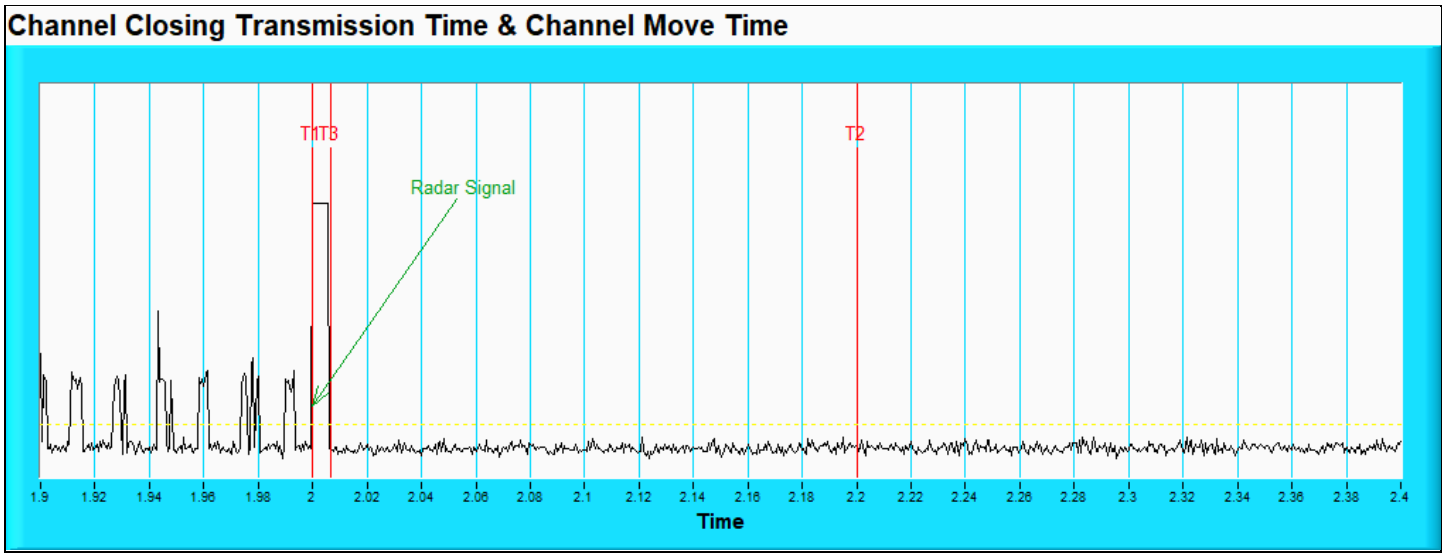


Note: Zoom in of the first 500 ms after radar signal applied.

Radar signal 4

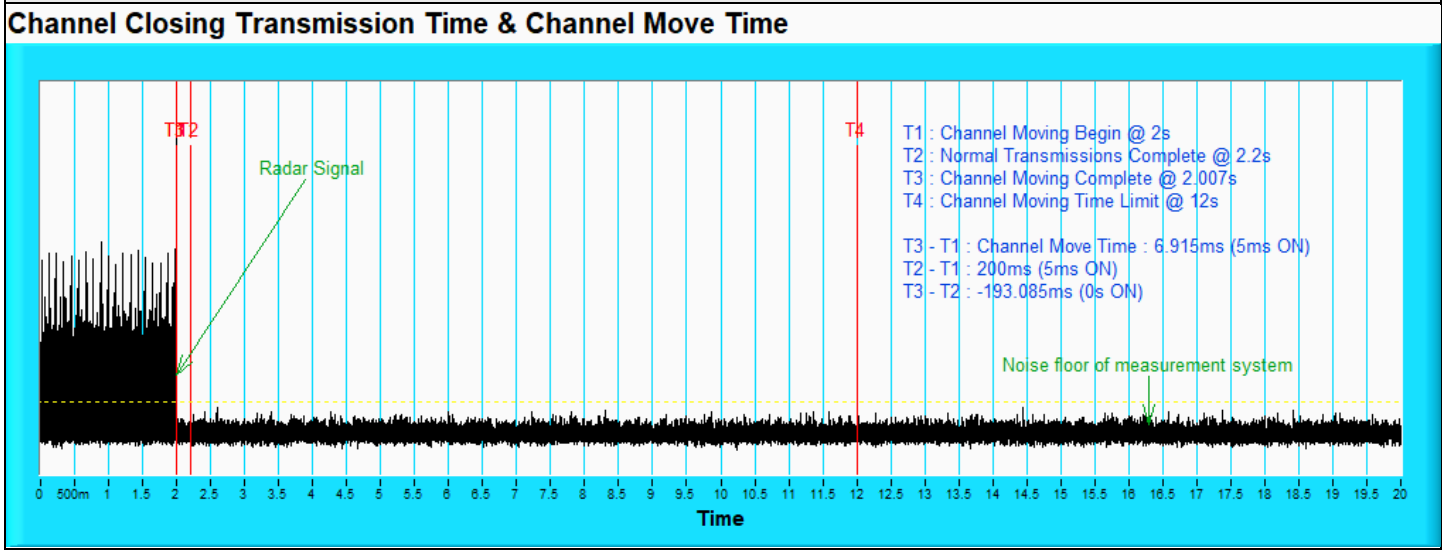

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

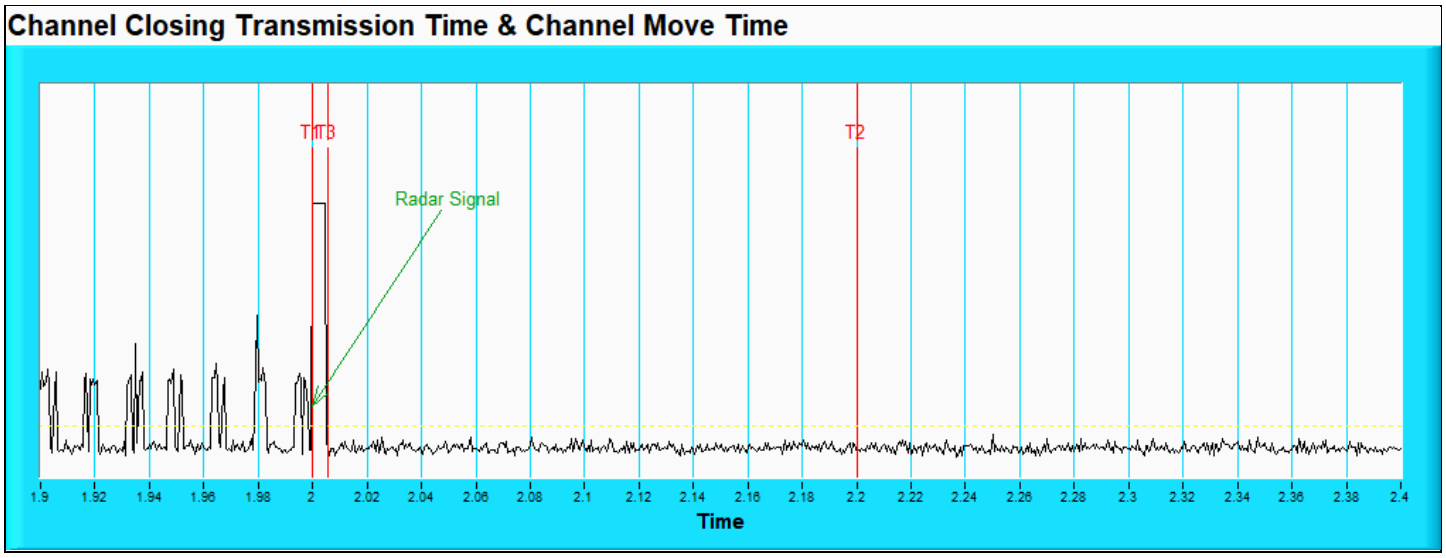


Note: Zoom in of the first 500 ms after radar signal applied.


Internal

Client without radar detection

BW240-Radar signal 0

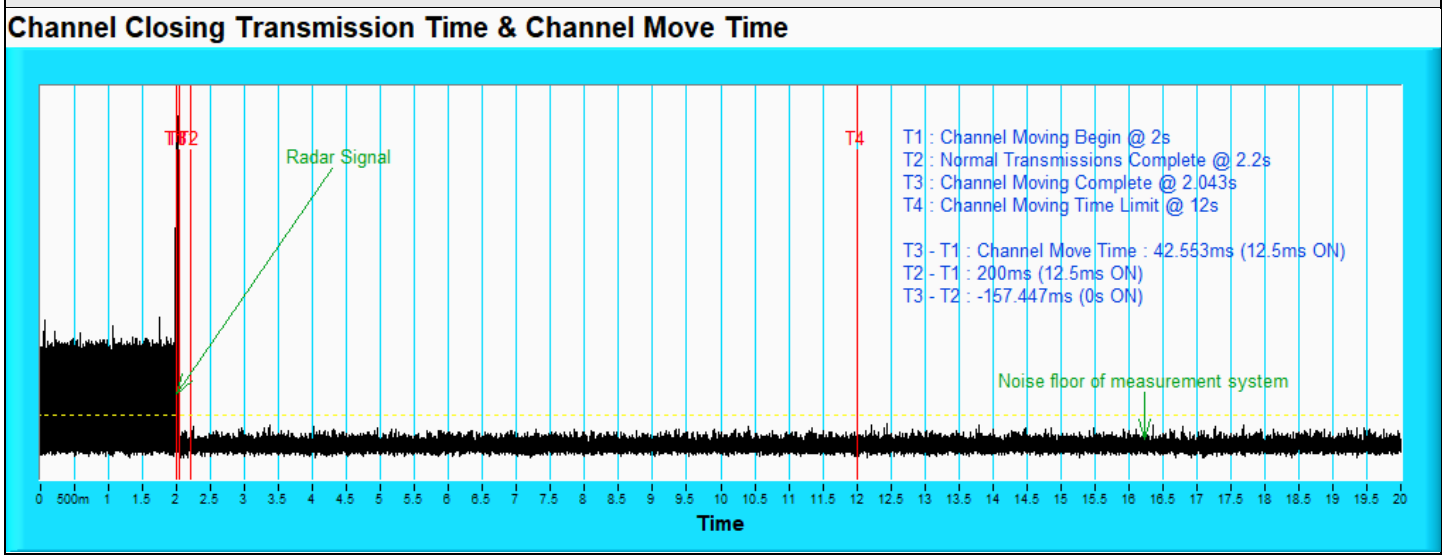


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

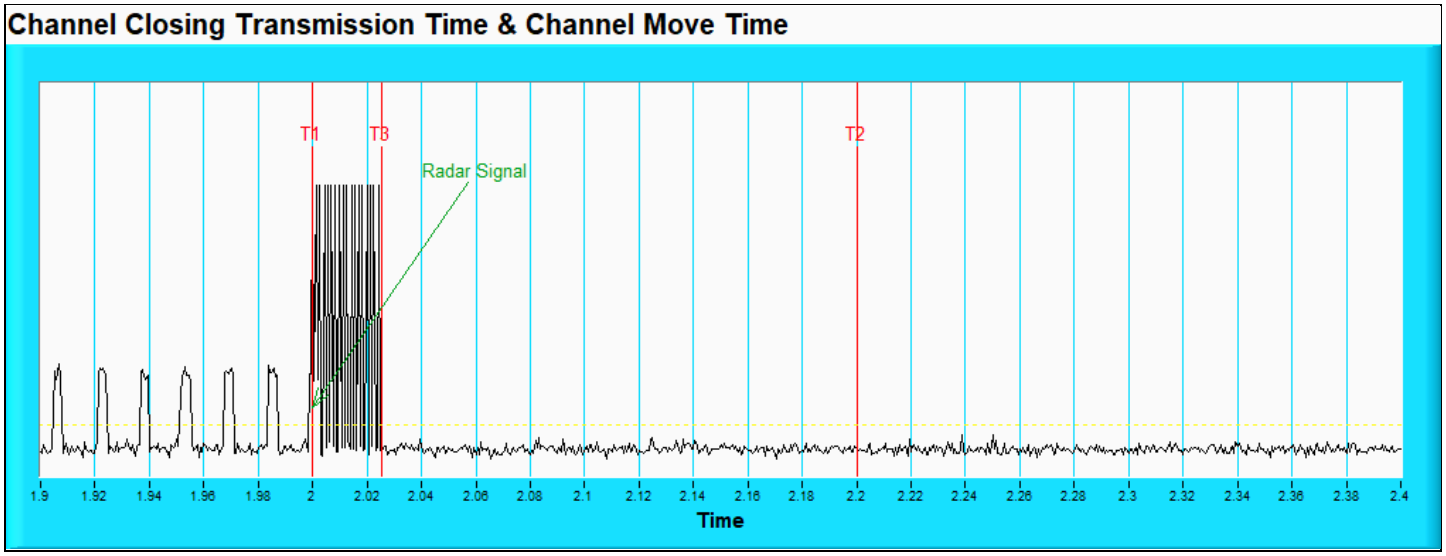


Note: Zoom in of the first 500 ms after radar signal applied.

Master

Radar signal 0

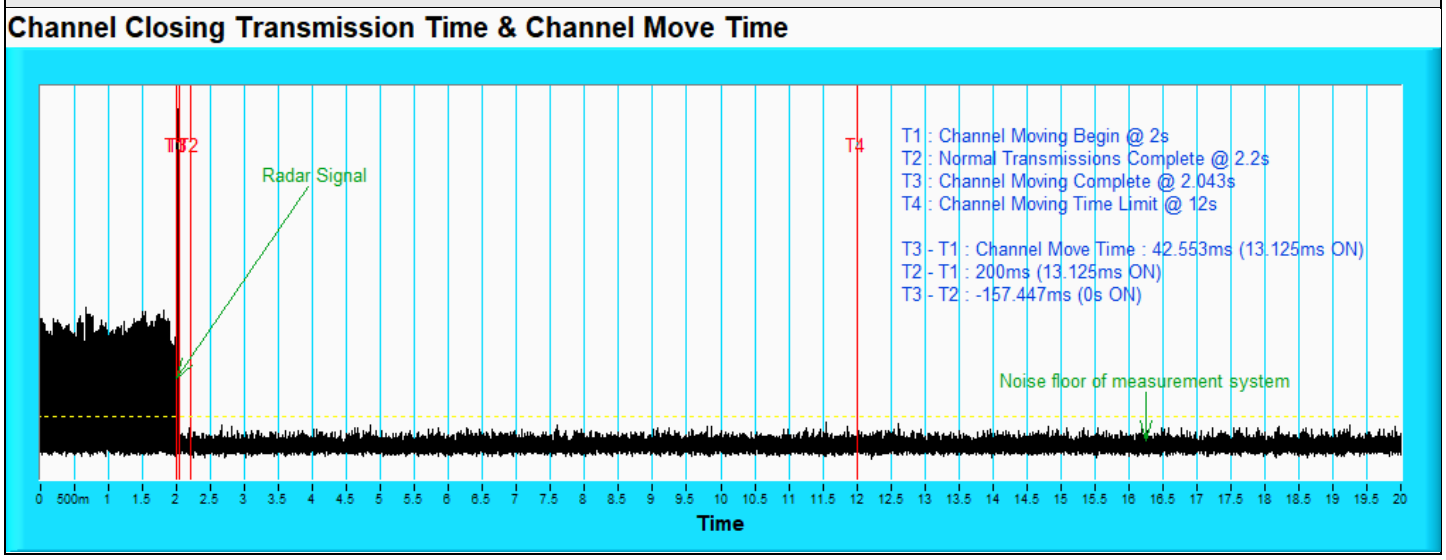


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

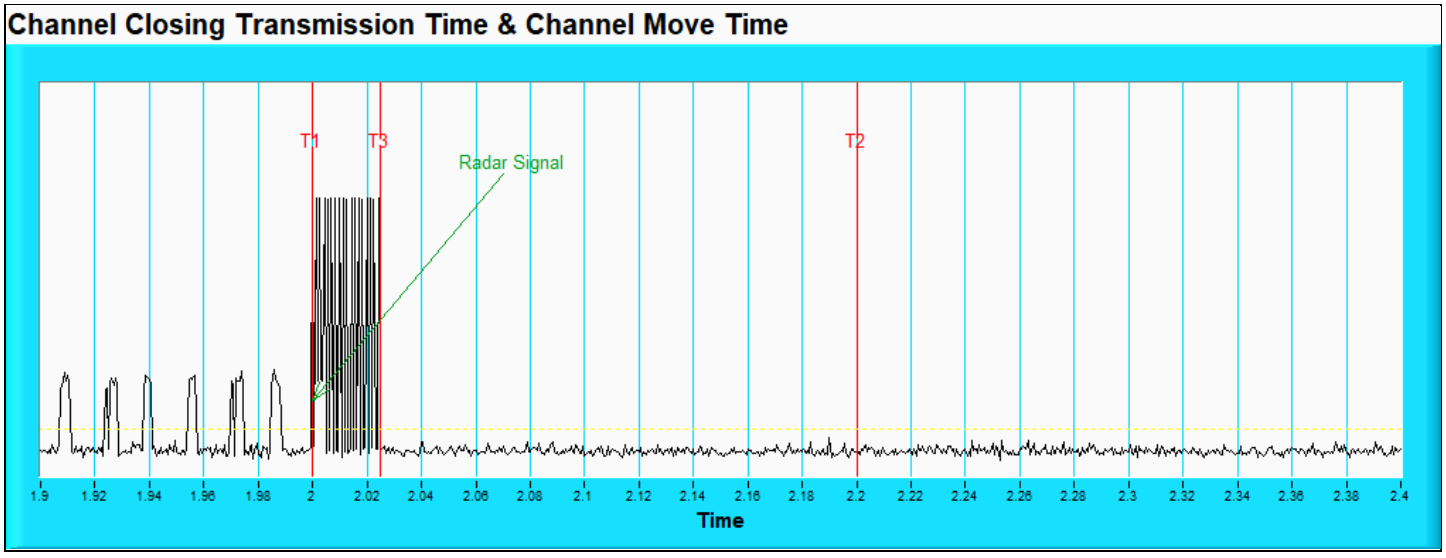


Note: Zoom in of the first 500 ms after radar signal applied.

Radar signal 1

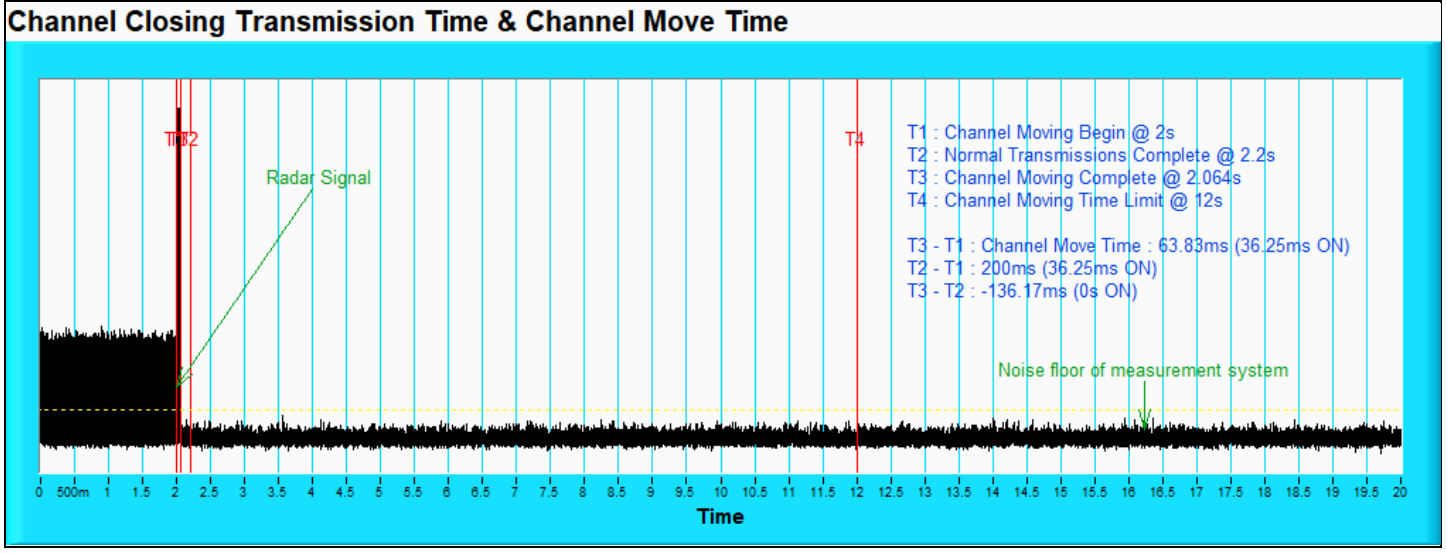


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

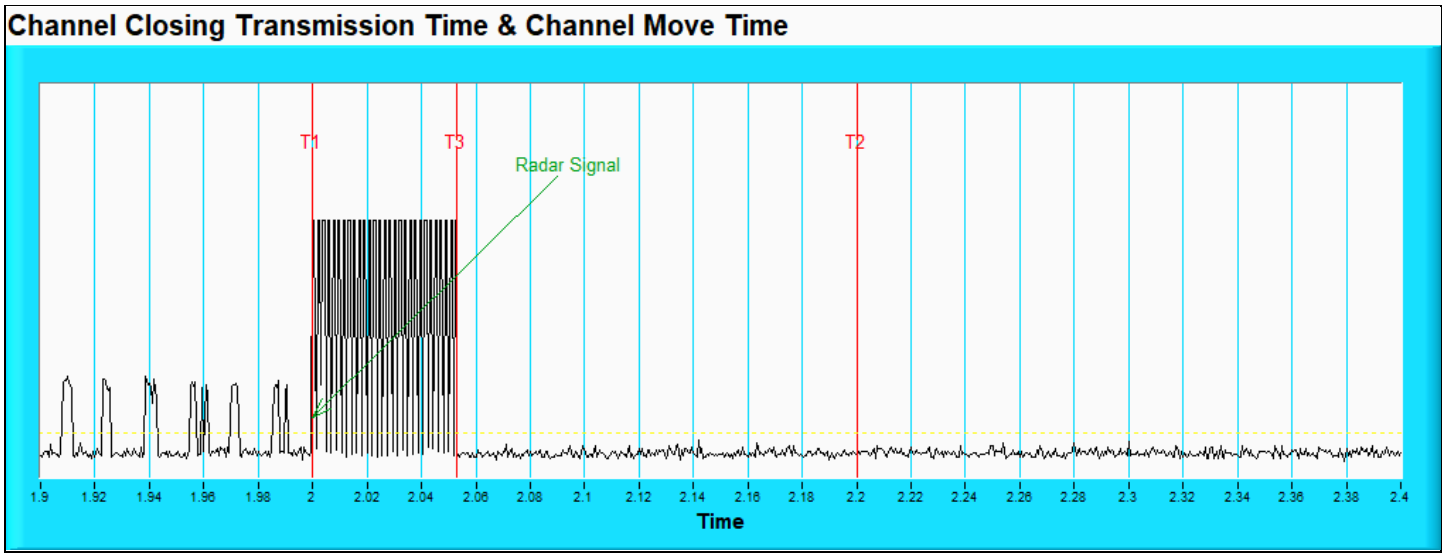


Note: Zoom in of the first 500 ms after radar signal applied.

Radar signal 2

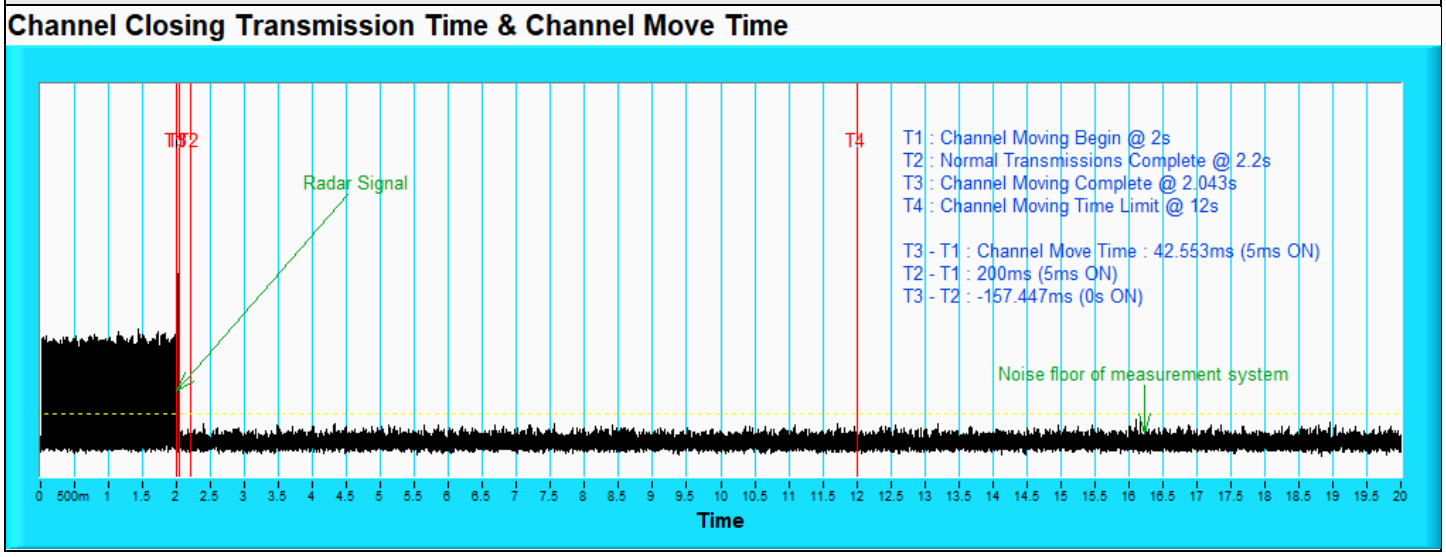


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

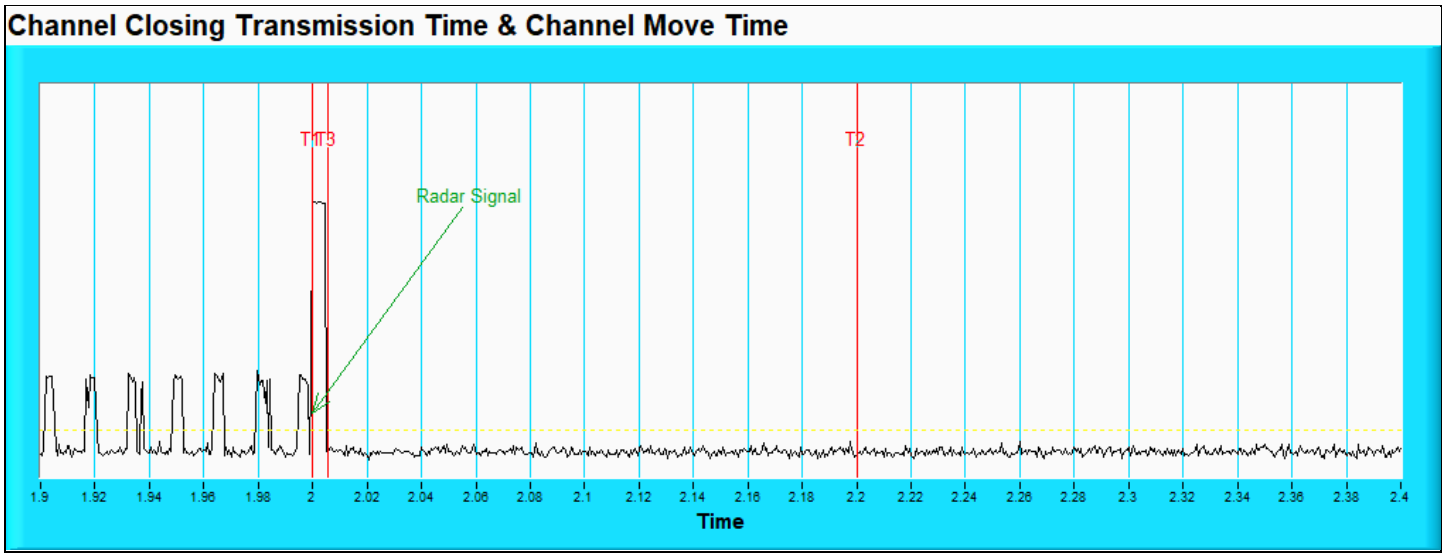


Note: Zoom in of the first 500 ms after radar signal applied.

Radar signal 3

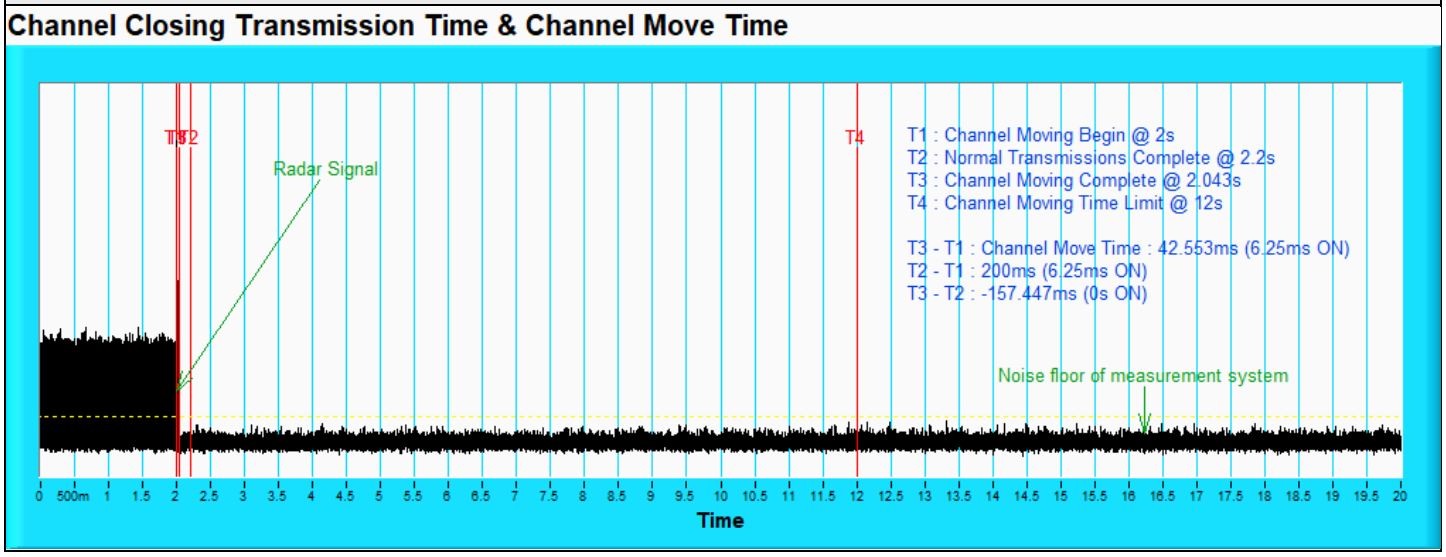


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

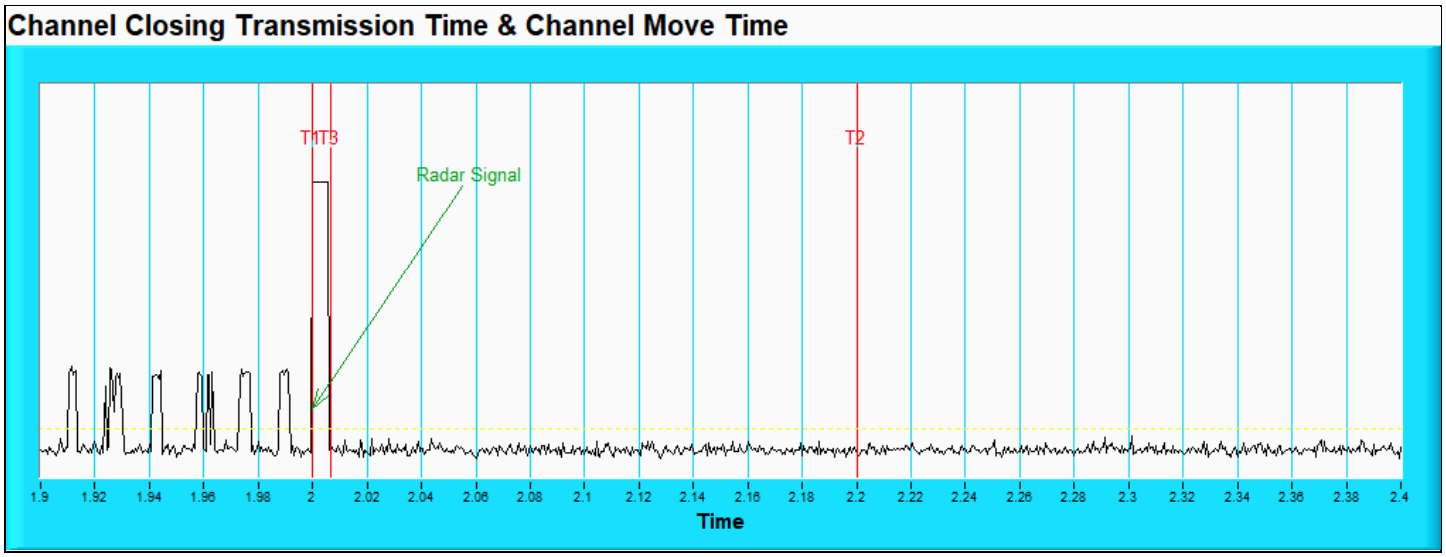


Note: Zoom in of the first 500 ms after radar signal applied.

Radar signal 4

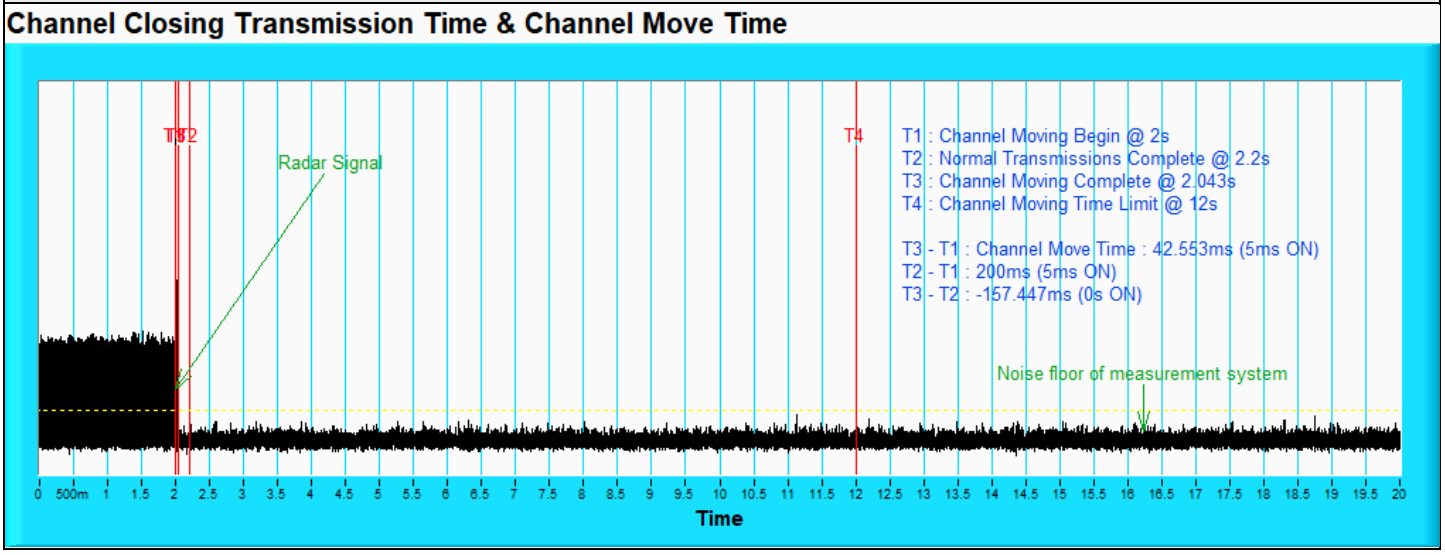

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

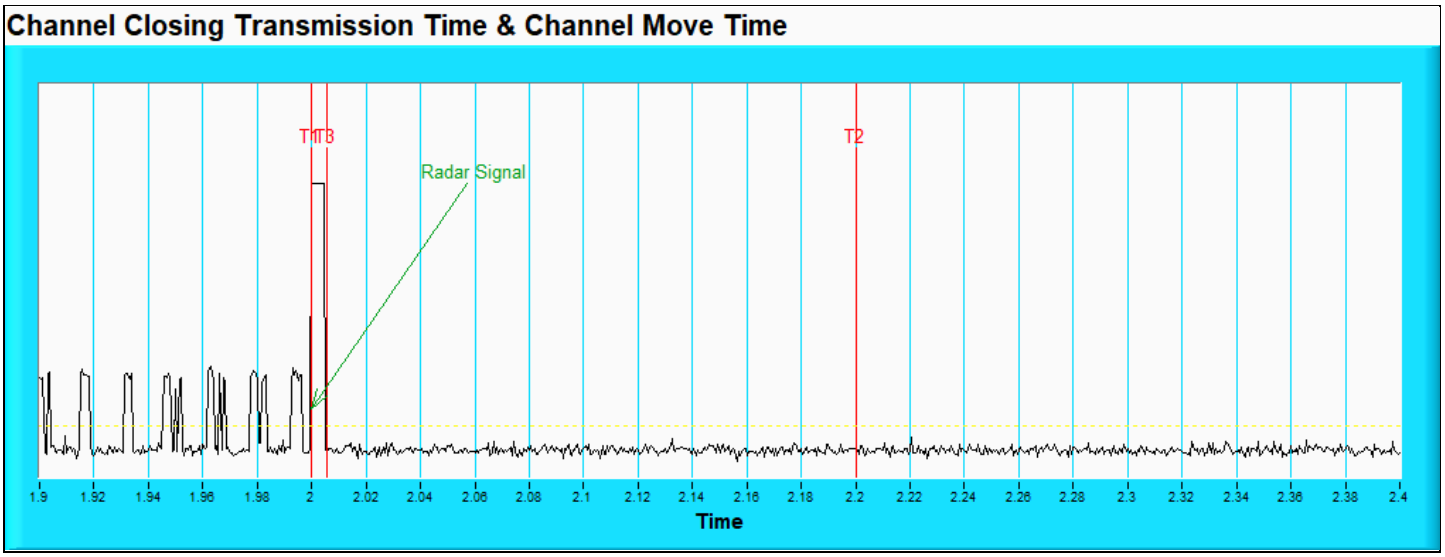

Note: Zoom in of the first 500 ms after radar signal applied.

7.4 Non-Occupancy Period


Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih & Neil Yeh

External

Client without radar detection


For Associated Test

1) Test results demonstrating an associated client link is established with the master on a test frequency.

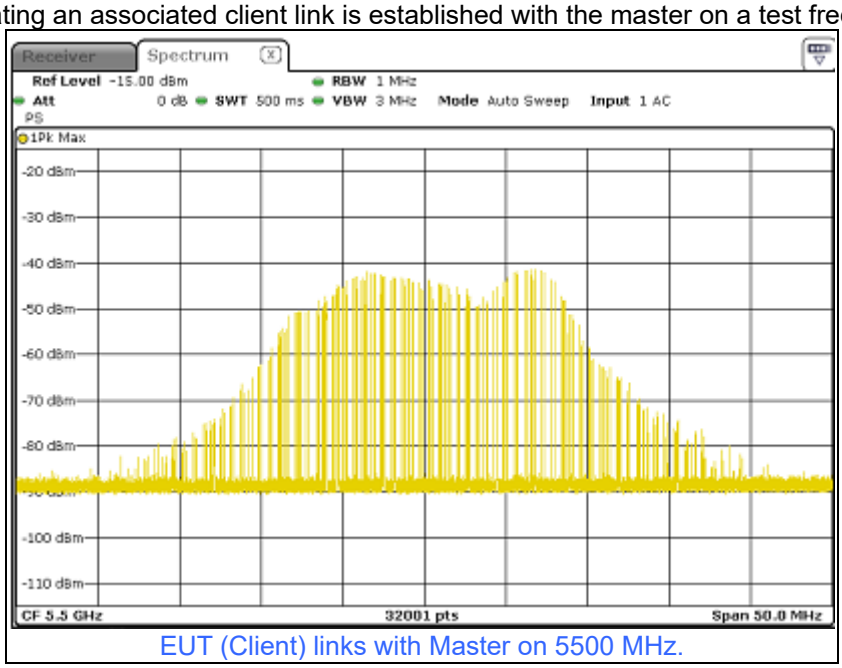

EUT (Client) links with Master on 5500 MHz.

2) The client and DFS-certified Master device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

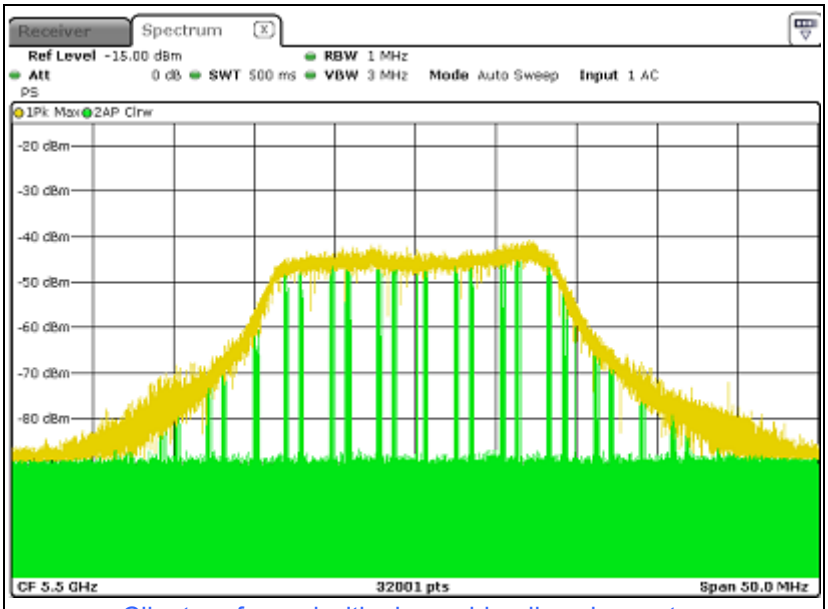


Client performed with channel-loading via master.

3). The device transmits one type of radar as specified in the DFS Order.


	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 0	1.0	1428.0	18	25704.0
Download	1	Type 0	1.0	1428.0	18	25704.0
Download	2	Type 0	1.0	1428.0	18	25704.0
Download	3	Type 0	1.0	1428.0	18	25704.0
Download	4	Type 0	1.0	1428.0	18	25704.0
Download	5	Type 0	1.0	1428.0	18	25704.0
Download	6	Type 0	1.0	1428.0	18	25704.0
Download	7	Type 0	1.0	1428.0	18	25704.0
Download	8	Type 0	1.0	1428.0	18	25704.0
Download	9	Type 0	1.0	1428.0	18	25704.0
Download	10	Type 0	1.0	1428.0	18	25704.0
Download	11	Type 0	1.0	1428.0	18	25704.0
Download	12	Type 0	1.0	1428.0	18	25704.0
Download	13	Type 0	1.0	1428.0	18	25704.0
Download	14	Type 0	1.0	1428.0	18	25704.0
Download	15	Type 0	1.0	1428.0	18	25704.0
Download	16	Type 0	1.0	1428.0	18	25704.0

DFS Test Tool

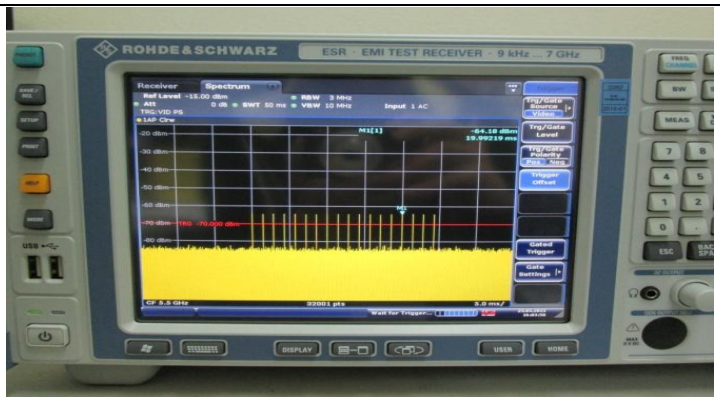

Radar 0 is used to test during DFS test

4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

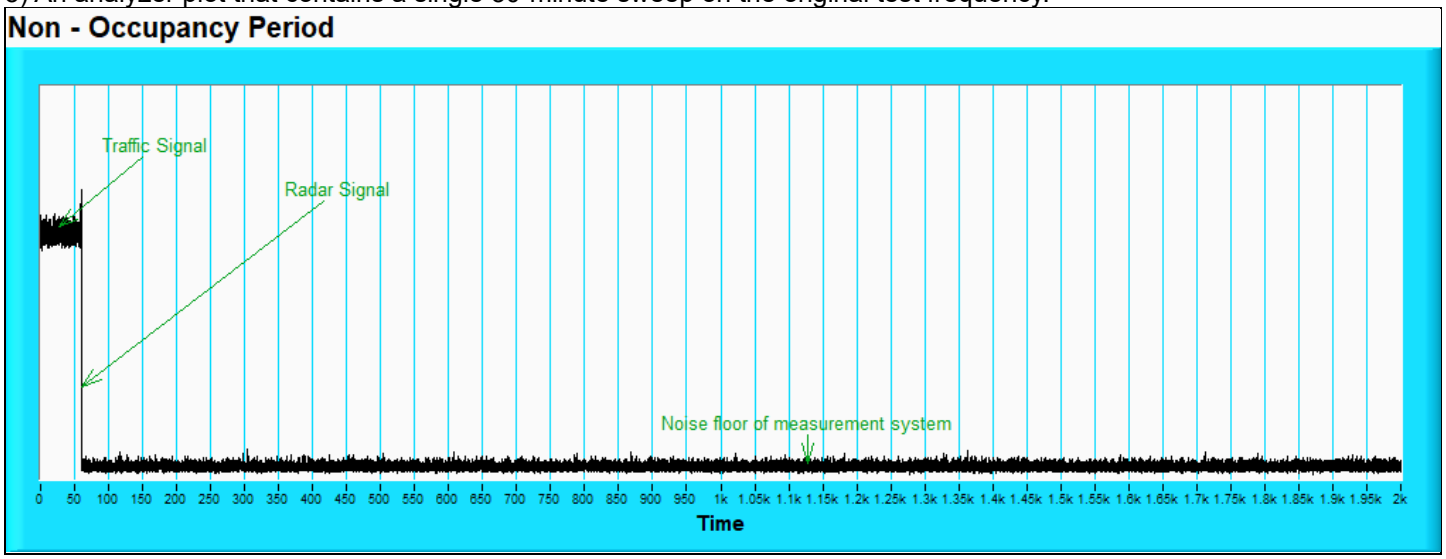


External

Master


For Associated Test

1) Test results demonstrating an associated client link is established with the master on a test frequency.

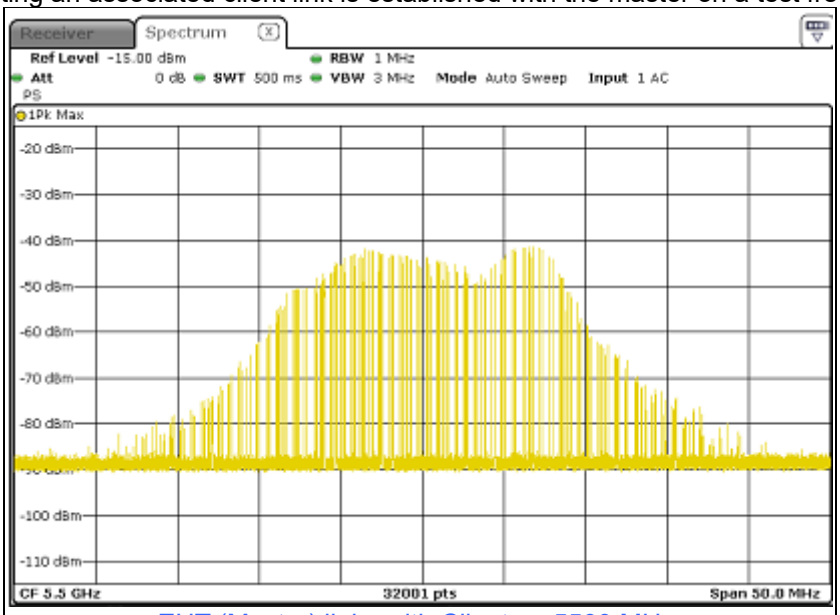

EUT (Master) links with Client on 5500 MHz.

2) The Master and DFS-certified client device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

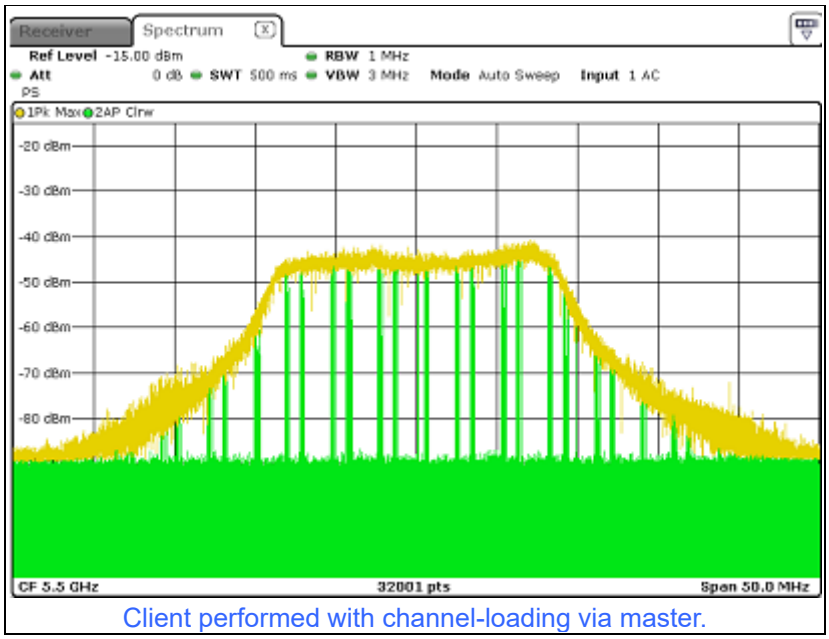


Client performed with channel-loading via master.

3). The device transmits one type of radar as specified in the DFS Order.


	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 0	1.0	1428.0	18	25704.0
Download	1	Type 0	1.0	1428.0	18	25704.0
Download	2	Type 0	1.0	1428.0	18	25704.0
Download	3	Type 0	1.0	1428.0	18	25704.0
Download	4	Type 0	1.0	1428.0	18	25704.0
Download	5	Type 0	1.0	1428.0	18	25704.0
Download	6	Type 0	1.0	1428.0	18	25704.0
Download	7	Type 0	1.0	1428.0	18	25704.0
Download	8	Type 0	1.0	1428.0	18	25704.0
Download	9	Type 0	1.0	1428.0	18	25704.0
Download	10	Type 0	1.0	1428.0	18	25704.0
Download	11	Type 0	1.0	1428.0	18	25704.0
Download	12	Type 0	1.0	1428.0	18	25704.0
Download	13	Type 0	1.0	1428.0	18	25704.0
Download	14	Type 0	1.0	1428.0	18	25704.0
Download	15	Type 0	1.0	1428.0	18	25704.0
Download	16	Type 0	1.0	1428.0	18	25704.0

DFS Test Tool

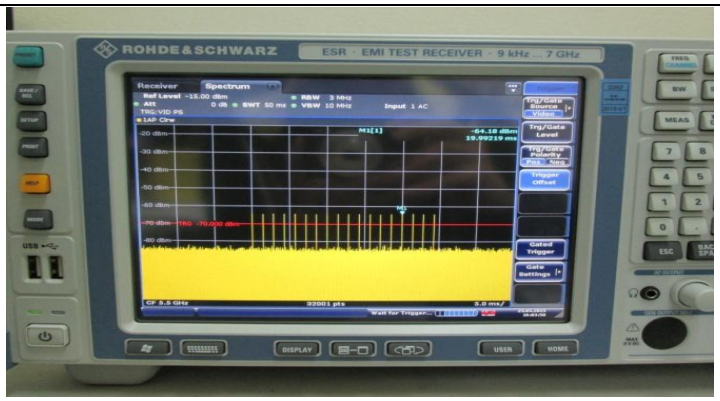

Radar 0 is used to test during DFS test

4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

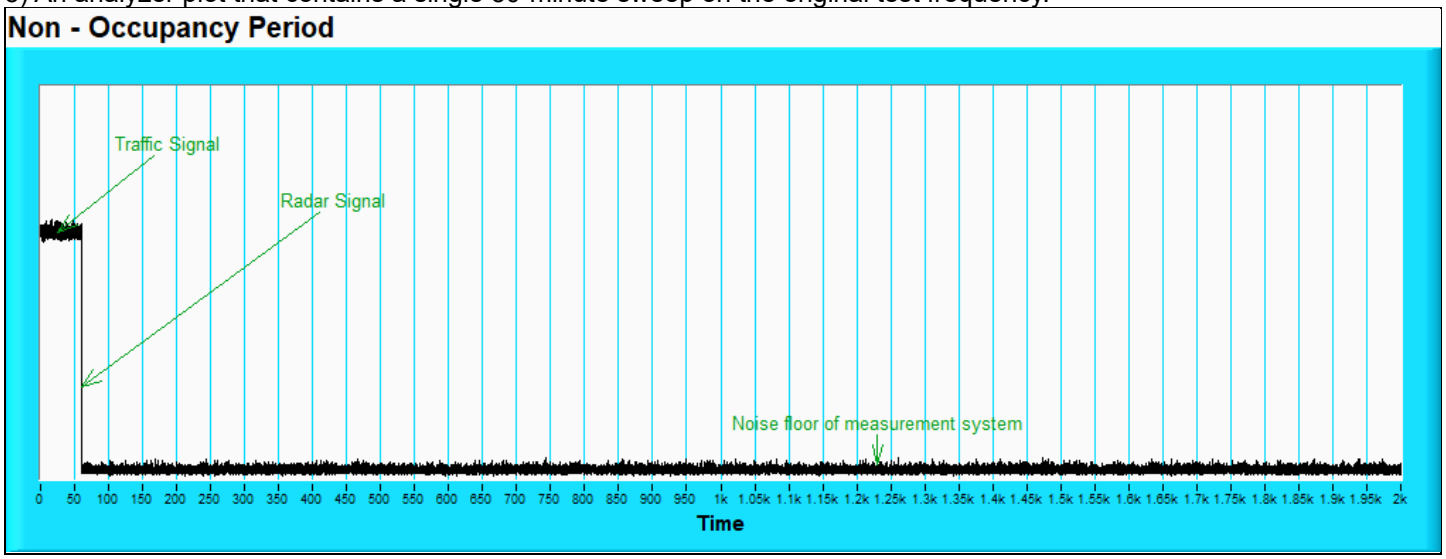


Internal

Client without radar detection


For Associated Test

1) Test results demonstrating an associated client link is established with the master on a test frequency.

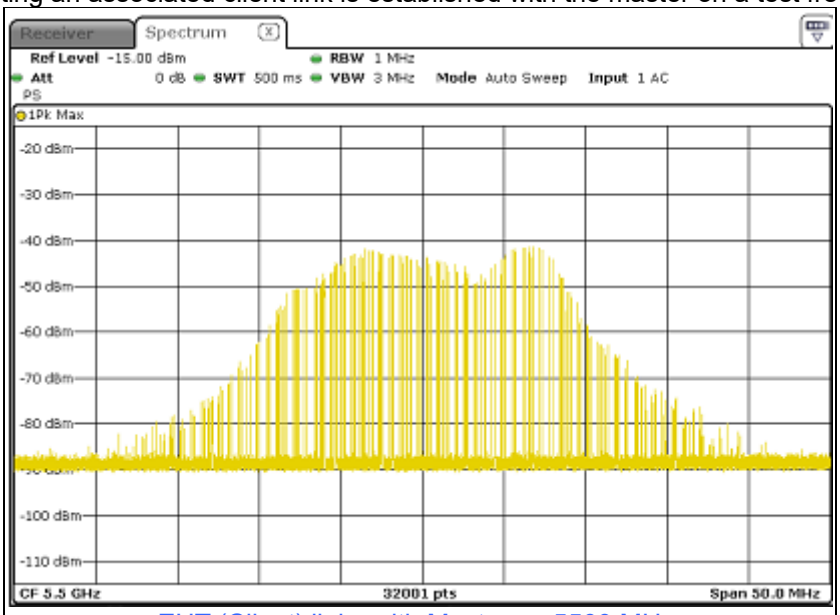

EUT (Client) links with Master on 5500 MHz.

2) The client and DFS-certified Master device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

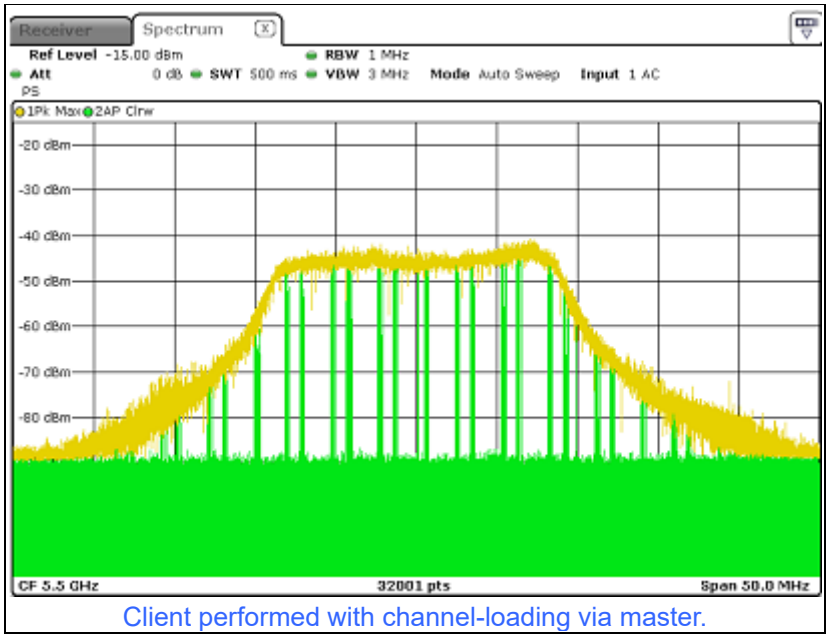


Client performed with channel-loading via master.

3). The device transmits one type of radar as specified in the DFS Order.


	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 0	1.0	1428.0	18	25704.0
Download	1	Type 0	1.0	1428.0	18	25704.0
Download	2	Type 0	1.0	1428.0	18	25704.0
Download	3	Type 0	1.0	1428.0	18	25704.0
Download	4	Type 0	1.0	1428.0	18	25704.0
Download	5	Type 0	1.0	1428.0	18	25704.0
Download	6	Type 0	1.0	1428.0	18	25704.0
Download	7	Type 0	1.0	1428.0	18	25704.0
Download	8	Type 0	1.0	1428.0	18	25704.0
Download	9	Type 0	1.0	1428.0	18	25704.0
Download	10	Type 0	1.0	1428.0	18	25704.0
Download	11	Type 0	1.0	1428.0	18	25704.0
Download	12	Type 0	1.0	1428.0	18	25704.0
Download	13	Type 0	1.0	1428.0	18	25704.0
Download	14	Type 0	1.0	1428.0	18	25704.0
Download	15	Type 0	1.0	1428.0	18	25704.0
Download	16	Type 0	1.0	1428.0	18	25704.0

DFS Test Tool

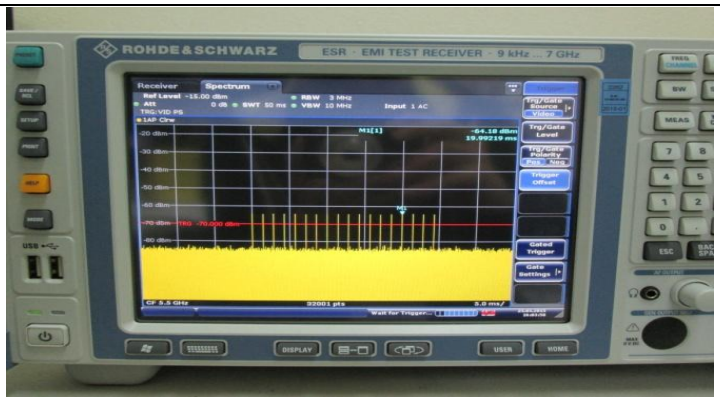

Radar 0 is used to test during DFS test

4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

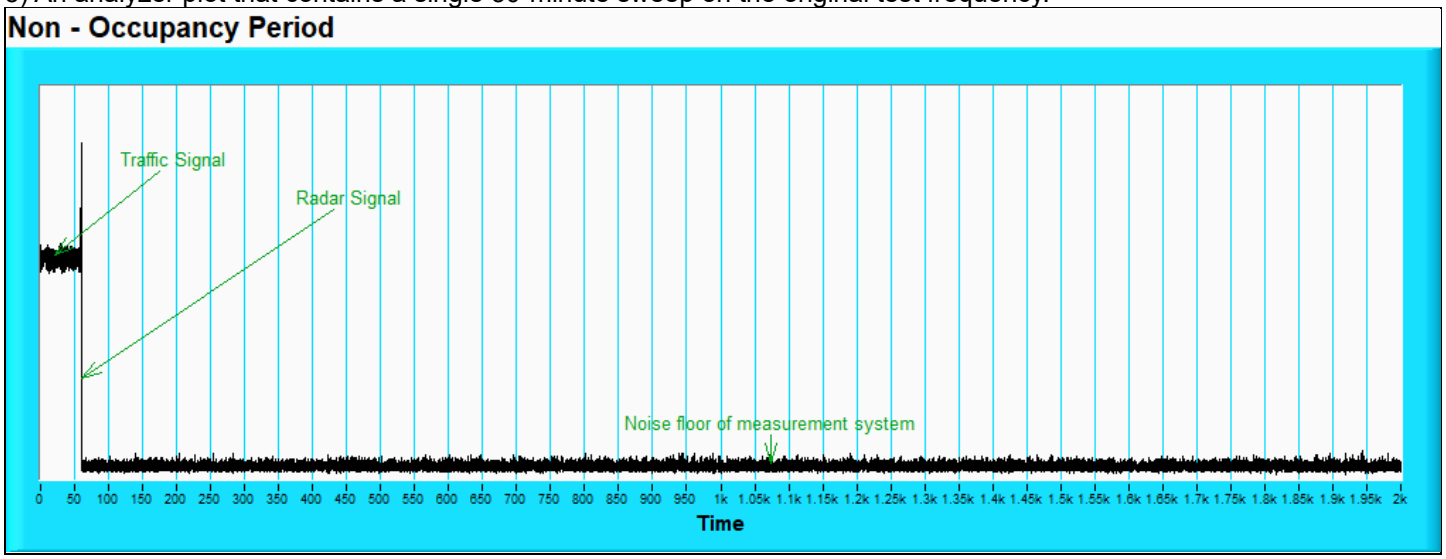


Internal

Master


For Associated Test

1) Test results demonstrating an associated client link is established with the master on a test frequency.

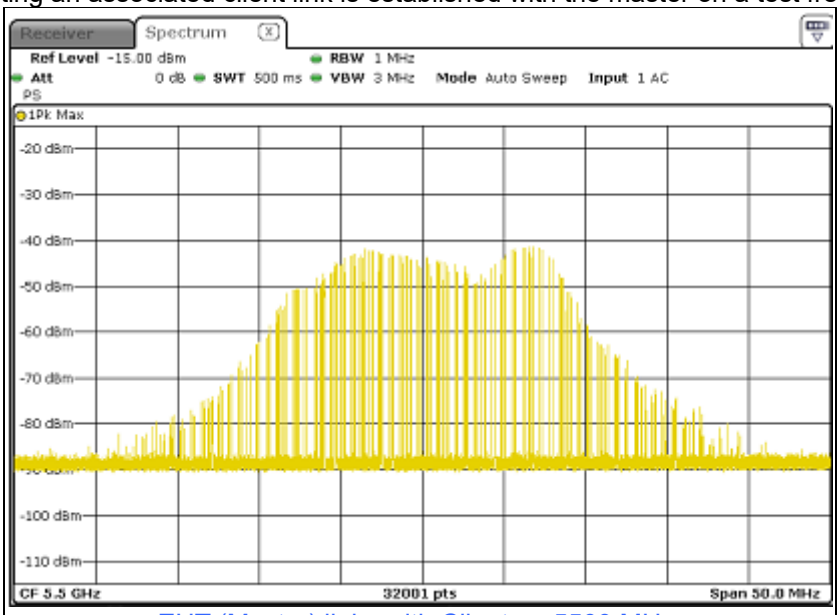

EUT (Master) links with Client on 5500 MHz.

2) The Master and DFS-certified client device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

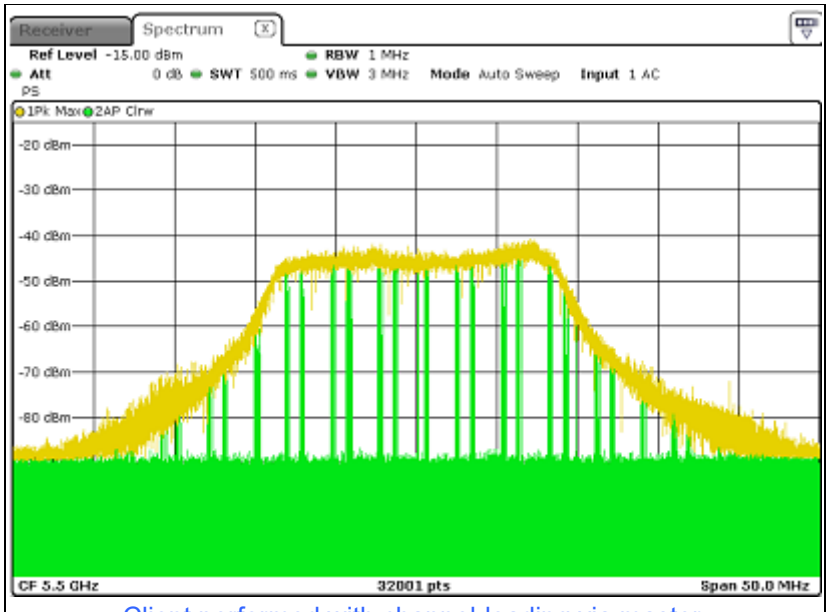


Client performed with channel-loading via master.

3). The device transmits one type of radar as specified in the DFS Order.


	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 0	1.0	1428.0	18	25704.0
Download	1	Type 0	1.0	1428.0	18	25704.0
Download	2	Type 0	1.0	1428.0	18	25704.0
Download	3	Type 0	1.0	1428.0	18	25704.0
Download	4	Type 0	1.0	1428.0	18	25704.0
Download	5	Type 0	1.0	1428.0	18	25704.0
Download	6	Type 0	1.0	1428.0	18	25704.0
Download	7	Type 0	1.0	1428.0	18	25704.0
Download	8	Type 0	1.0	1428.0	18	25704.0
Download	9	Type 0	1.0	1428.0	18	25704.0
Download	10	Type 0	1.0	1428.0	18	25704.0
Download	11	Type 0	1.0	1428.0	18	25704.0
Download	12	Type 0	1.0	1428.0	18	25704.0
Download	13	Type 0	1.0	1428.0	18	25704.0
Download	14	Type 0	1.0	1428.0	18	25704.0
Download	15	Type 0	1.0	1428.0	18	25704.0
Download	16	Type 0	1.0	1428.0	18	25704.0

DFS Test Tool

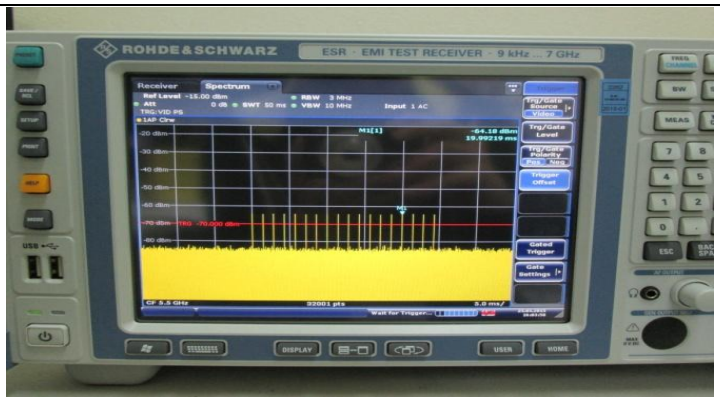

Radar 0 is used to test during DFS test

4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

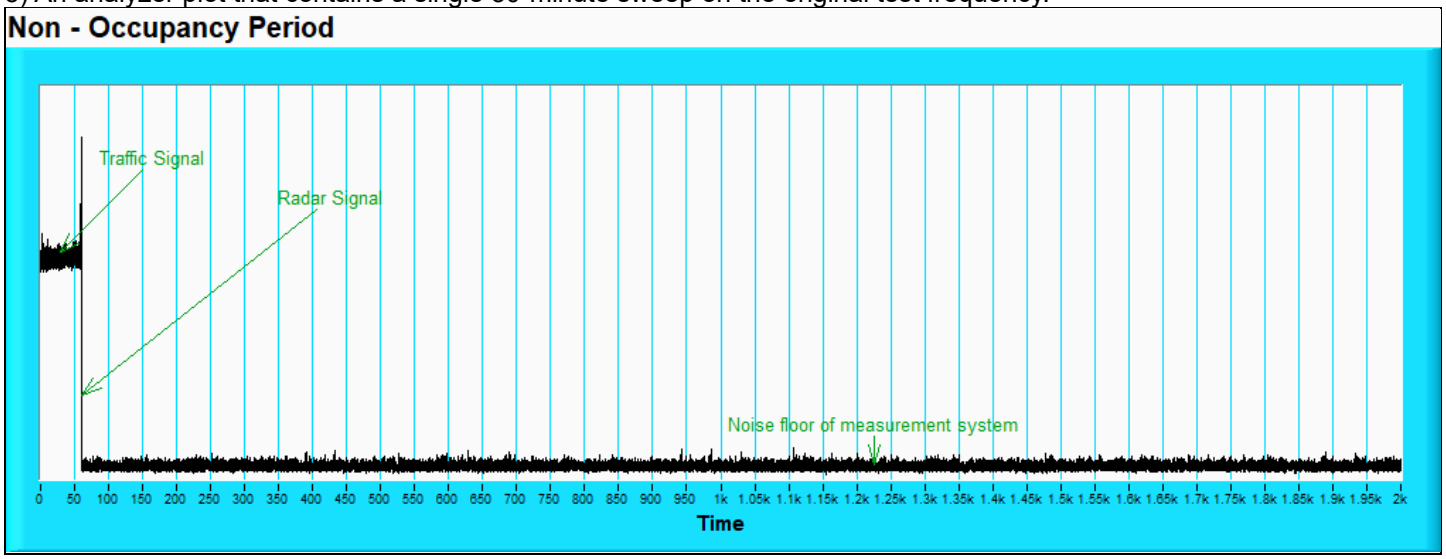

7.5 Statistical Performance Check

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih

External

Master

Radar Type	Number of Trials (Times)	Percentage of Successful Detection						Minimum Percentage of Successful Detection	Test Result
		802.11be (EHT20)	802.11be (EHT40)	802.11be (EHT80)	802.11be (EHT160) CH50	802.11be (EHT160) CH114	802.11be (EHT240)		
1	30	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	60%	Pass
2	30	96.7%	93.3%	100.0%	100.0%	96.7%	93.3%	60%	Pass
3	30	83.3%	86.7%	86.7%	63.3%	66.7%	83.3%	60%	Pass
4	30	93.3%	86.7%	90.0%	63.3%	63.3%	70.0%	60%	Pass
Aggregate (Radar Types 1 - 4)		93.3%	91.7%	94.2%	81.7%	81.7%	86.7%	80%	Pass
5	30	100.0%	100.0%	100.0%	96.7%	93.3%	100.0%	80%	Pass
6	30	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	70%	Pass

802.11be (EHT20) 5500MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5494	22	1066.1	57	938	Yes
2	5509	10	1432.7	76	698	Yes
3	5507	6	1618.1	86	618	Yes
4	5506	2	1858.7	99	538	Yes
5	5510	19	1139	61	878	Yes
6	5493	23	326.2	18	3066	Yes
7	5496	7	1567.4	83	638	Yes
8	5491	21	1089.3	58	918	Yes
9	5490	17	1193.3	63	838	Yes
10	5499	18	1165.5	62	858	Yes
11	5500	15	1253.1	67	798	Yes
12	5501	11	1392.8	74	718	Yes
13	5502	4	1730.1	92	578	Yes
14	5495	5	1672.2	89	598	Yes
15	5498	3	1792.1	95	558	Yes
16	5505	-	394.3	21	2536	Yes
17	5504	-	1035.2	55	966	Yes
18	5492	-	1209.2	64	827	Yes
19	5497	-	399.8	22	2501	Yes
20	5503	-	385.4	21	2595	Yes
21	5508	-	897.7	48	1114	Yes
22	5504	-	768	41	1302	Yes
23	5509	-	328.4	18	3045	Yes
24	5491	-	615.8	33	1624	Yes
25	5498	-	347.5	19	2878	Yes
26	5507	-	973.7	52	1027	Yes
27	5499	-	402.4	22	2485	Yes
28	5496	-	625	33	1600	Yes
29	5502	-	853.2	46	1172	Yes
30	5501	-	849.6	45	1177	Yes
Detection Rate: 100%						

802.11be (EHT20) 5500MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5497	26	3.2	179	Yes
2	5492	23	1.1	207	Yes
3	5496	24	2.1	230	Yes
4	5509	29	4.8	200	Yes
5	5494	28	3.9	214	Yes
6	5506	26	2.9	222	Yes
7	5498	26	3.2	204	Yes
8	5499	25	2.5	192	Yes
9	5507	26	3.1	164	Yes
10	5490	23	1.2	156	Yes
11	5491	27	3.9	210	Yes
12	5501	29	4.6	201	Yes
13	5510	26	3.2	162	Yes
14	5493	25	2.2	197	Yes
15	5503	29	4.5	163	Yes
16	5505	26	3	203	Yes
17	5500	29	5	168	Yes
18	5502	25	2.4	217	Yes
19	5508	26	2.9	191	Yes
20	5504	25	2.3	166	Yes
21	5495	27	3.7	150	Yes
22	5505	25	2.2	176	Yes
23	5500	29	4.9	195	Yes
24	5510	26	2.9	202	Yes
25	5504	25	2.5	178	Yes
26	5502	23	1.1	206	No
27	5506	27	3.8	155	Yes
28	5491	29	4.7	157	Yes
29	5508	25	2.4	224	Yes
30	5490	28	4.2	159	Yes
Detection Rate: 96.7%					

802.11be (EHT20) 5500MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5509	17	8.2	355	Yes
2	5497	16	6.1	487	Yes
3	5490	16	7.1	344	No
4	5493	18	9.8	288	Yes
5	5495	18	8.9	230	Yes
6	5504	17	7.9	432	Yes
7	5498	17	8.2	207	No
8	5500	17	7.5	443	Yes
9	5510	17	8.1	439	Yes
10	5506	16	6.2	223	Yes
11	5491	18	8.9	208	Yes
12	5501	18	9.6	463	Yes
13	5505	17	8.2	441	No
14	5503	16	7.2	323	Yes
15	5502	18	9.5	297	Yes
16	5499	17	8	412	Yes
17	5494	18	10	324	Yes
18	5507	17	7.4	271	No
19	5508	17	7.9	349	Yes
20	5496	16	7.3	409	Yes
21	5492	18	8.7	373	Yes
22	5506	16	7.2	254	Yes
23	5500	18	9.9	274	Yes
24	5491	17	7.9	278	Yes
25	5495	17	7.5	317	Yes
26	5510	16	6.1	260	Yes
27	5490	18	8.8	211	Yes
28	5498	18	9.7	272	Yes
29	5508	17	7.4	264	Yes
30	5494	18	9.2	284	No
Detection Rate: 83.3%					

802.11be (EHT20) 5500MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5504	14	16	355	Yes
2	5491	12	11.3	487	Yes
3	5508	13	13.5	344	Yes
4	5503	16	19.4	288	Yes
5	5493	15	17.5	230	Yes
6	5498	14	15.3	432	Yes
7	5500	14	15.9	207	Yes
8	5507	13	14.3	443	Yes
9	5494	14	15.8	439	Yes
10	5492	12	11.5	223	Yes
11	5490	15	17.4	208	No
12	5502	16	19	463	Yes
13	5509	14	16	441	Yes
14	5501	13	13.8	323	Yes
15	5499	16	18.9	297	Yes
16	5505	14	15.5	412	Yes
17	5495	16	19.9	324	Yes
18	5496	13	14.1	271	Yes
19	5510	14	15.2	349	Yes
20	5506	13	13.8	409	Yes
21	5497	15	17.1	373	Yes
22	5499	13	13.8	254	Yes
23	5503	16	19.8	274	Yes
24	5500	14	15.3	278	Yes
25	5492	13	14.5	317	Yes
26	5504	12	11.3	260	Yes
27	5498	15	17.3	211	No
28	5495	16	19.2	272	Yes
29	5507	13	14.2	264	Yes
30	5494	15	18.2	284	Yes
Detection Rate: 93.3%					

802.11be (EHT20) 5500MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5500	LP_SIGNAL_01	Yes
2	5	5500	LP_SIGNAL_02	Yes
3	9	5500	LP_SIGNAL_03	Yes
4	19	5500	LP_SIGNAL_04	Yes
5	16	5500	LP_SIGNAL_05	Yes
6	12	5500	LP_SIGNAL_06	Yes
7	13	5500	LP_SIGNAL_07	Yes
8	10	5500	LP_SIGNAL_08	Yes
9	13	5500	LP_SIGNAL_09	Yes
10	6	5500	LP_SIGNAL_10	Yes
11	16	5496.91	LP_SIGNAL_11	Yes
12	19	5498.11	LP_SIGNAL_12	Yes
13	13	5495.71	LP_SIGNAL_13	Yes
14	10	5494.51	LP_SIGNAL_14	Yes
15	18	5497.71	LP_SIGNAL_15	Yes
16	12	5495.31	LP_SIGNAL_16	Yes
17	20	5498.51	LP_SIGNAL_17	Yes
18	10	5494.51	LP_SIGNAL_18	Yes
19	12	5495.31	LP_SIGNAL_19	Yes
20	10	5494.51	LP_SIGNAL_20	Yes
21	15	5503.48	LP_SIGNAL_21	Yes
22	9	5505.88	LP_SIGNAL_22	Yes
23	20	5501.48	LP_SIGNAL_23	Yes
24	12	5504.68	LP_SIGNAL_24	Yes
25	11	5505.08	LP_SIGNAL_25	Yes
26	5	5507.48	LP_SIGNAL_26	Yes
27	16	5503.08	LP_SIGNAL_27	Yes
28	19	5501.88	LP_SIGNAL_28	Yes
29	10	5505.48	LP_SIGNAL_29	Yes
30	17	5502.68	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT20) 5500MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT40) 5510MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5522	23	326.2	18	3066	Yes
2	5491	9	1474.9	78	678	Yes
3	5524	16	1222.5	65	818	Yes
4	5505	5	1672.2	89	598	Yes
5	5492	7	1567.4	83	638	Yes
6	5497	15	1253.1	67	798	Yes
7	5493	12	1355	72	738	Yes
8	5499	20	1113.6	59	898	Yes
9	5526	11	1392.8	74	718	Yes
10	5496	3	1792.1	95	558	Yes
11	5490	19	1139	61	878	Yes
12	5523	17	1193.3	63	838	Yes
13	5498	2	1858.7	99	538	Yes
14	5506	8	1519.8	81	658	Yes
15	5494	22	1066.1	57	938	Yes
16	5508	-	1065	57	939	Yes
17	5495	-	499	27	2004	Yes
18	5504	-	627.7	34	1593	Yes
19	5507	-	636.5	34	1571	Yes
20	5503	-	1179.2	63	848	Yes
21	5517	-	370.8	20	2697	Yes
22	5511	-	590.7	32	1693	Yes
23	5500	-	557.7	30	1793	Yes
24	5530	-	989.1	53	1011	Yes
25	5521	-	349.4	19	2862	Yes
26	5527	-	997	53	1003	Yes
27	5509	-	363.5	20	2751	Yes
28	5510	-	492.9	27	2029	Yes
29	5501	-	1326.3	70	754	Yes
30	5525	-	803.2	43	1245	Yes
Detection Rate: 100%						

802.11be (EHT40) 5510MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5512	29	4.9	210	Yes
2	5498	24	1.7	178	Yes
3	5495	25	2.1	173	Yes
4	5521	28	4	222	Yes
5	5511	27	3.6	219	Yes
6	5520	29	5	212	Yes
7	5505	29	4.9	176	Yes
8	5496	23	1.1	199	Yes
9	5515	23	1.2	162	No
10	5490	29	4.5	220	Yes
11	5497	29	5	229	Yes
12	5499	29	5	214	Yes
13	5502	25	2.4	153	Yes
14	5514	28	4.1	197	Yes
15	5518	24	2	211	Yes
16	5524	29	4.6	190	Yes
17	5523	23	1	213	Yes
18	5527	25	2.4	218	Yes
19	5530	26	3.2	215	Yes
20	5509	26	3.1	157	Yes
21	5510	25	2.7	168	Yes
22	5528	25	2.6	227	Yes
23	5500	24	2	171	Yes
24	5491	23	1.1	158	No
25	5503	23	1	167	Yes
26	5516	29	4.9	150	Yes
27	5526	29	4.8	191	Yes
28	5517	25	2.3	159	Yes
29	5501	28	4.3	226	Yes
30	5506	26	3.3	208	Yes
Detection Rate: 93.3%					

802.11be (EHT40) 5510MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5493	18	9.9	235	Yes
2	5523	16	6.7	357	Yes
3	5495	16	7.1	333	Yes
4	5501	18	9	242	No
5	5504	17	8.6	397	No
6	5520	18	10	302	Yes
7	5490	18	9.9	203	No
8	5517	16	6.1	428	Yes
9	5505	16	6.2	335	Yes
10	5526	18	9.5	240	Yes
11	5500	18	10	224	Yes
12	5521	18	10	410	Yes
13	5494	17	7.4	359	Yes
14	5510	18	9.1	269	Yes
15	5498	16	7	250	Yes
16	5527	18	9.6	247	Yes
17	5496	16	6	222	No
18	5514	17	7.4	424	Yes
19	5508	17	8.2	393	Yes
20	5511	17	8.1	382	Yes
21	5516	17	7.7	486	Yes
22	5491	17	7.6	480	Yes
23	5507	16	7	360	Yes
24	5529	16	6.1	297	Yes
25	5528	16	6	265	Yes
26	5515	18	9.9	263	Yes
27	5509	18	9.8	324	Yes
28	5497	17	7.3	386	Yes
29	5518	18	9.3	311	Yes
30	5519	17	8.3	378	Yes
Detection Rate: 86.7%					

802.11be (EHT40) 5510MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5493	16	19.7	235	No
2	5500	12	12.7	357	No
3	5506	13	13.6	333	Yes
4	5508	15	17.7	242	Yes
5	5524	15	16.8	397	Yes
6	5530	16	20	302	Yes
7	5496	16	19.7	203	Yes
8	5497	12	11.3	428	Yes
9	5490	12	11.5	335	Yes
10	5513	16	18.8	240	Yes
11	5498	16	20	224	No
12	5509	16	20	410	Yes
13	5502	13	14.2	359	Yes
14	5491	15	18	269	Yes
15	5527	13	13.3	250	No
16	5505	16	19	247	Yes
17	5518	12	11.1	222	Yes
18	5514	13	14.2	424	Yes
19	5528	14	15.9	393	Yes
20	5519	14	15.8	382	Yes
21	5529	14	14.8	486	Yes
22	5520	13	14.6	480	Yes
23	5501	13	13.2	360	Yes
24	5525	12	11.3	297	Yes
25	5494	12	11	265	Yes
26	5515	16	19.6	263	Yes
27	5521	16	19.6	324	Yes
28	5526	13	14	386	Yes
29	5507	16	18.3	311	Yes
30	5499	14	16.1	378	Yes
Detection Rate: 86.7%					

802.11be (EHT40) 5510MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	20	5510	LP_SIGNAL_01	Yes
2	8	5510	LP_SIGNAL_02	Yes
3	9	5510	LP_SIGNAL_03	Yes
4	16	5510	LP_SIGNAL_04	Yes
5	15	5510	LP_SIGNAL_05	Yes
6	20	5510	LP_SIGNAL_06	Yes
7	20	5510	LP_SIGNAL_07	Yes
8	5	5510	LP_SIGNAL_08	Yes
9	5	5510	LP_SIGNAL_09	Yes
10	18	5510	LP_SIGNAL_10	Yes
11	20	5498.85	LP_SIGNAL_11	Yes
12	20	5498.85	LP_SIGNAL_12	Yes
13	10	5494.85	LP_SIGNAL_13	Yes
14	17	5497.65	LP_SIGNAL_14	Yes
15	9	5494.45	LP_SIGNAL_15	Yes
16	19	5498.45	LP_SIGNAL_16	Yes
17	5	5492.85	LP_SIGNAL_17	Yes
18	10	5494.85	LP_SIGNAL_18	Yes
19	13	5496.05	LP_SIGNAL_19	Yes
20	13	5496.05	LP_SIGNAL_20	Yes
21	11	5524.62	LP_SIGNAL_21	Yes
22	11	5524.62	LP_SIGNAL_22	Yes
23	9	5525.42	LP_SIGNAL_23	Yes
24	5	5527.02	LP_SIGNAL_24	Yes
25	5	5527.02	LP_SIGNAL_25	Yes
26	20	5521.02	LP_SIGNAL_26	Yes
27	20	5521.02	LP_SIGNAL_27	Yes
28	10	5525.02	LP_SIGNAL_28	Yes
29	17	5522.22	LP_SIGNAL_29	Yes
30	13	5523.82	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT40) 5510MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT80) 5530MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5560	18	1165.5	62	858	Yes
2	5520	20	1113.6	59	898	Yes
3	5524	8	1519.8	81	658	Yes
4	5493	19	1139	61	878	Yes
5	5500	6	1618.1	86	618	Yes
6	5516	12	1355	72	738	Yes
7	5509	5	1672.2	89	598	Yes
8	5563	7	1567.4	83	638	Yes
9	5566	22	1066.1	57	938	Yes
10	5525	2	1858.7	99	538	Yes
11	5514	9	1474.9	78	678	Yes
12	5496	14	1285.3	68	778	Yes
13	5499	21	1089.3	58	918	Yes
14	5551	10	1432.7	76	698	Yes
15	5558	3	1792.1	95	558	Yes
16	5505	-	327.8	18	3051	Yes
17	5570	-	425.4	23	2351	Yes
18	5547	-	1085.8	58	921	Yes
19	5544	-	643.1	34	1555	Yes
20	5492	-	386.1	21	2590	Yes
21	5526	-	635.7	34	1573	Yes
22	5534	-	1733.1	92	577	Yes
23	5512	-	479.2	26	2087	Yes
24	5513	-	1003	53	997	Yes
25	5559	-	424.1	23	2358	Yes
26	5536	-	638.6	34	1566	Yes
27	5495	-	412.5	22	2424	Yes
28	5545	-	501.5	27	1994	Yes
29	5528	-	520	28	1923	Yes
30	5554	-	1412.4	75	708	Yes
Detection Rate: 100%						

802.11be (EHT80) 5530MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5567	23	1.3	228	Yes
2	5565	26	3.2	172	Yes
3	5543	27	3.9	212	Yes
4	5498	24	1.9	213	Yes
5	5494	27	3.6	150	Yes
6	5499	26	3.3	158	Yes
7	5508	29	4.9	210	Yes
8	5497	23	1.3	223	Yes
9	5544	29	4.9	152	Yes
10	5535	27	3.3	190	Yes
11	5556	25	2.7	203	Yes
12	5501	29	5	227	Yes
13	5528	26	3.3	196	Yes
14	5532	28	4.4	198	Yes
15	5520	24	1.9	161	Yes
16	5505	27	3.6	226	Yes
17	5517	26	2.8	181	Yes
18	5540	25	2.5	167	Yes
19	5511	23	1.3	178	Yes
20	5524	25	2.4	187	Yes
21	5510	29	4.8	153	Yes
22	5490	27	3.5	201	Yes
23	5492	23	1.3	166	Yes
24	5507	29	4.8	155	Yes
25	5568	28	4.3	221	Yes
26	5515	26	3.2	191	Yes
27	5569	24	1.7	192	Yes
28	5533	23	1.2	164	Yes
29	5557	25	2.4	154	Yes
30	5519	29	5	207	Yes
Detection Rate: 100%					

802.11be (EHT80) 5530MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5565	16	6.3	403	Yes
2	5562	17	8.2	313	No
3	5546	18	8.9	214	Yes
4	5570	16	6.9	262	Yes
5	5518	17	8.6	273	Yes
6	5498	17	8.3	470	Yes
7	5535	18	9.9	453	Yes
8	5561	16	6.3	378	Yes
9	5568	18	9.9	483	Yes
10	5552	17	8.3	317	Yes
11	5551	17	7.7	385	No
12	5501	18	10	275	Yes
13	5502	17	8.3	497	Yes
14	5505	18	9.4	420	Yes
15	5540	16	6.9	366	Yes
16	5522	17	8.6	414	Yes
17	5537	17	7.8	444	Yes
18	5524	17	7.5	427	Yes
19	5497	16	6.3	338	Yes
20	5499	17	7.4	436	Yes
21	5490	18	9.8	265	Yes
22	5526	17	8.5	451	Yes
23	5512	16	6.3	274	Yes
24	5533	18	9.8	417	Yes
25	5494	18	9.3	330	Yes
26	5536	17	8.2	472	No
27	5569	16	6.7	333	Yes
28	5545	16	6.2	377	Yes
29	5504	17	7.4	394	Yes
30	5519	18	10	296	No
Detection Rate: 86.7%					

802.11be (EHT80) 5530MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5563	12	11.7	403	Yes
2	5507	14	15.9	313	Yes
3	5535	15	17.4	214	Yes
4	5509	13	13.2	262	Yes
5	5494	15	16.8	273	Yes
6	5538	14	16.1	470	Yes
7	5524	16	19.8	453	Yes
8	5530	12	11.7	378	Yes
9	5499	16	19.8	483	Yes
10	5505	14	16.2	317	No
11	5568	14	14.8	385	Yes
12	5504	16	19.9	275	Yes
13	5519	14	16.1	497	Yes
14	5550	16	18.6	420	Yes
15	5493	13	13.2	366	No
16	5518	15	16.9	414	Yes
17	5523	14	15	444	Yes
18	5544	13	14.4	427	Yes
19	5508	12	11.7	338	Yes
20	5541	13	14.2	436	No
21	5490	16	19.6	265	Yes
22	5500	15	16.5	451	Yes
23	5558	12	11.7	274	Yes
24	5517	16	19.4	417	Yes
25	5514	16	18.3	330	Yes
26	5542	14	15.9	472	Yes
27	5492	12	12.5	333	Yes
28	5533	12	11.5	377	Yes
29	5501	13	14.2	394	Yes
30	5510	16	19.8	296	Yes
Detection Rate: 90%					

802.11be (EHT80) 5530MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	6	5530	LP_SIGNAL_01	Yes
2	13	5530	LP_SIGNAL_02	Yes
3	16	5530	LP_SIGNAL_03	Yes
4	8	5530	LP_SIGNAL_04	Yes
5	15	5530	LP_SIGNAL_05	Yes
6	14	5530	LP_SIGNAL_06	Yes
7	20	5530	LP_SIGNAL_07	Yes
8	6	5530	LP_SIGNAL_08	Yes
9	20	5530	LP_SIGNAL_09	Yes
10	14	5530	LP_SIGNAL_10	Yes
11	11	5495.6	LP_SIGNAL_11	Yes
12	20	5499.2	LP_SIGNAL_12	Yes
13	14	5496.8	LP_SIGNAL_13	Yes
14	18	5498.4	LP_SIGNAL_14	Yes
15	8	5494.4	LP_SIGNAL_15	Yes
16	15	5497.2	LP_SIGNAL_16	Yes
17	12	5496	LP_SIGNAL_17	Yes
18	11	5495.6	LP_SIGNAL_18	Yes
19	6	5493.6	LP_SIGNAL_19	Yes
20	10	5495.2	LP_SIGNAL_20	Yes
21	20	5560.68	LP_SIGNAL_21	Yes
22	14	5563.08	LP_SIGNAL_22	Yes
23	6	5566.28	LP_SIGNAL_23	Yes
24	19	5561.08	LP_SIGNAL_24	Yes
25	17	5561.88	LP_SIGNAL_25	Yes
26	13	5563.48	LP_SIGNAL_26	Yes
27	7	5565.88	LP_SIGNAL_27	Yes
28	5	5566.68	LP_SIGNAL_28	Yes
29	10	5564.68	LP_SIGNAL_29	Yes
30	20	5560.68	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT80) 5530MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5327	18	1165.5	62	858	Yes
2	5284	20	1113.6	59	898	Yes
3	5330	8	1519.8	81	658	Yes
4	5329	19	1139	61	878	Yes
5	5322	6	1618.1	86	618	Yes
6	5273	12	1355	72	738	Yes
7	5260	5	1672.2	89	598	Yes
8	5305	7	1567.4	83	638	Yes
9	5269	22	1066.1	57	938	Yes
10	5261	2	1858.7	99	538	Yes
11	5272	9	1474.9	78	678	Yes
12	5301	14	1285.3	68	778	Yes
13	5291	21	1089.3	58	918	Yes
14	5259	10	1432.7	76	698	Yes
15	5264	3	1792.1	95	558	Yes
16	5256	-	327.8	18	3051	Yes
17	5315	-	425.4	23	2351	Yes
18	5265	-	1085.8	58	921	Yes
19	5293	-	643.1	34	1555	Yes
20	5275	-	386.1	21	2590	Yes
21	5309	-	635.7	34	1573	Yes
22	5323	-	1733.1	92	577	Yes
23	5282	-	479.2	26	2087	Yes
24	5324	-	1003	53	997	Yes
25	5308	-	424.1	23	2358	Yes
26	5312	-	638.6	34	1566	Yes
27	5278	-	412.5	22	2424	Yes
28	5320	-	501.5	27	1994	Yes
29	5298	-	520	28	1923	Yes
30	5283	-	1412.4	75	708	Yes
Detection Rate: 100%						

802.11be (EHT160) 5250MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5326	23	1.3	228	Yes
2	5251	26	3.2	172	Yes
3	5324	27	3.9	212	Yes
4	5320	24	1.9	213	Yes
5	5305	27	3.6	150	Yes
6	5318	26	3.3	158	Yes
7	5258	29	4.9	210	Yes
8	5271	23	1.3	223	Yes
9	5279	29	4.9	152	Yes
10	5259	27	3.3	190	Yes
11	5319	25	2.7	203	Yes
12	5288	29	5	227	Yes
13	5304	26	3.3	196	Yes
14	5263	28	4.4	198	Yes
15	5282	24	1.9	161	Yes
16	5253	27	3.6	226	Yes
17	5275	26	2.8	181	Yes
18	5267	25	2.5	167	Yes
19	5309	23	1.3	178	Yes
20	5273	25	2.4	187	Yes
21	5290	29	4.8	153	Yes
22	5257	27	3.5	201	Yes
23	5272	23	1.3	166	Yes
24	5308	29	4.8	155	Yes
25	5314	28	4.3	221	Yes
26	5294	26	3.2	191	Yes
27	5276	24	1.7	192	Yes
28	5277	23	1.2	164	Yes
29	5278	25	2.4	154	Yes
30	5255	29	5	207	Yes
Detection Rate: 100%					

802.11be (EHT160) 5250MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5295	16	6.3	403	No
2	5251	17	8.2	313	No
3	5313	18	8.9	214	Yes
4	5306	16	6.9	262	No
5	5254	17	8.6	273	No
6	5255	17	8.3	470	Yes
7	5288	18	9.9	453	Yes
8	5307	16	6.3	378	No
9	5258	18	9.9	483	Yes
10	5264	17	8.3	317	No
11	5320	17	7.7	385	Yes
12	5269	18	10	275	Yes
13	5268	17	8.3	497	Yes
14	5310	18	9.4	420	Yes
15	5317	16	6.9	366	No
16	5256	17	8.6	414	Yes
17	5291	17	7.8	444	No
18	5274	17	7.5	427	Yes
19	5286	16	6.3	338	Yes
20	5303	17	7.4	436	No
21	5315	18	9.8	265	Yes
22	5261	17	8.5	451	Yes
23	5275	16	6.3	274	Yes
24	5273	18	9.8	417	Yes
25	5321	18	9.3	330	Yes
26	5329	17	8.2	472	No
27	5281	16	6.7	333	Yes
28	5292	16	6.2	377	No
29	5322	17	7.4	394	Yes
30	5272	18	10	296	Yes
Detection Rate: 63.3%					

802.11be (EHT160) 5250MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5257	12	11.7	403	Yes
2	5287	14	15.9	313	Yes
3	5250	15	17.4	214	Yes
4	5314	13	13.2	262	Yes
5	5324	15	16.8	273	No
6	5286	14	16.1	470	Yes
7	5270	16	19.8	453	Yes
8	5262	12	11.7	378	No
9	5258	16	19.8	483	Yes
10	5259	14	16.2	317	Yes
11	5266	14	14.8	385	No
12	5280	16	19.9	275	No
13	5275	14	16.1	497	Yes
14	5263	16	18.6	420	No
15	5292	13	13.2	366	No
16	5254	15	16.9	414	Yes
17	5252	14	15	444	No
18	5269	13	14.4	427	Yes
19	5268	12	11.7	338	No
20	5312	13	14.2	436	Yes
21	5290	16	19.6	265	No
22	5329	15	16.5	451	Yes
23	5267	12	11.7	274	Yes
24	5273	16	19.4	417	Yes
25	5313	16	18.3	330	Yes
26	5294	14	15.9	472	No
27	5300	12	12.5	333	Yes
28	5298	12	11.5	377	No
29	5279	13	14.2	394	Yes
30	5328	16	19.8	296	Yes
Detection Rate: 63.3%					

802.11be (EHT160) 5250MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5290	LP_SIGNAL_01	Yes
2	5	5290	LP_SIGNAL_02	Yes
3	9	5290	LP_SIGNAL_03	Yes
4	19	5290	LP_SIGNAL_04	Yes
5	16	5290	LP_SIGNAL_05	Yes
6	12	5290	LP_SIGNAL_06	Yes
7	13	5290	LP_SIGNAL_07	Yes
8	10	5290	LP_SIGNAL_08	Yes
9	13	5290	LP_SIGNAL_09	Yes
10	6	5290	LP_SIGNAL_10	Yes
11	16	5256.4	LP_SIGNAL_11	Yes
12	19	5257.6	LP_SIGNAL_12	Yes
13	13	5255.2	LP_SIGNAL_13	Yes
14	10	5254	LP_SIGNAL_14	Yes
15	18	5257.2	LP_SIGNAL_15	Yes
16	12	5254.8	LP_SIGNAL_16	Yes
17	20	5258	LP_SIGNAL_17	No
18	10	5254	LP_SIGNAL_18	Yes
19	12	5254.8	LP_SIGNAL_19	Yes
20	10	5254	LP_SIGNAL_20	Yes
21	15	5321.84	LP_SIGNAL_21	Yes
22	9	5324.24	LP_SIGNAL_22	Yes
23	20	5319.84	LP_SIGNAL_23	Yes
24	12	5323.04	LP_SIGNAL_24	Yes
25	11	5323.44	LP_SIGNAL_25	Yes
26	5	5325.84	LP_SIGNAL_26	Yes
27	16	5321.44	LP_SIGNAL_27	Yes
28	19	5320.24	LP_SIGNAL_28	Yes
29	10	5323.84	LP_SIGNAL_29	Yes
30	17	5321.04	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5250MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT160) 5570MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5625	22	1066.1	57	938	Yes
2	5606	1	1930.5	102	518	Yes
3	5528	2	1858.7	99	538	Yes
4	5587	21	1089.3	58	918	Yes
5	5502	15	1253.1	67	798	Yes
6	5564	18	1165.5	62	858	Yes
7	5541	9	1474.9	78	678	Yes
8	5634	16	1222.5	65	818	Yes
9	5498	11	1392.8	74	718	Yes
10	5534	8	1519.8	81	658	Yes
11	5599	6	1618.1	86	618	Yes
12	5494	19	1139	61	878	Yes
13	5505	17	1193.3	63	838	Yes
14	5631	23	326.2	18	3066	Yes
15	5617	7	1567.4	83	638	Yes
16	5529	-	596.3	32	1677	Yes
17	5531	-	404.5	22	2472	Yes
18	5557	-	610.1	33	1639	Yes
19	5595	-	498.5	27	2006	Yes
20	5629	-	761	41	1314	Yes
21	5510	-	390.8	21	2559	Yes
22	5548	-	925.9	49	1080	Yes
23	5490	-	986.2	53	1014	Yes
24	5561	-	373.3	20	2679	Yes
25	5520	-	914.9	49	1093	Yes
26	5537	-	784.3	42	1275	Yes
27	5540	-	770.4	41	1298	Yes
28	5649	-	349.5	19	2861	Yes
29	5638	-	397	21	2519	Yes
30	5630	-	963.4	51	1038	Yes
Detection Rate: 100%						

802.11be (EHT160) 5570MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5499	25	2.3	199	Yes
2	5631	24	1.7	229	Yes
3	5636	24	1.6	169	Yes
4	5530	28	4	218	Yes
5	5620	24	1.6	185	Yes
6	5604	28	4.3	196	Yes
7	5496	25	2.5	160	Yes
8	5527	27	3.5	167	Yes
9	5542	26	2.7	176	Yes
10	5592	27	3.8	209	Yes
11	5510	26	2.9	180	Yes
12	5538	28	4.3	157	Yes
13	5502	24	1.6	181	Yes
14	5513	29	4.7	162	Yes
15	5606	28	4.3	182	Yes
16	5589	23	1.2	215	Yes
17	5603	26	3	205	Yes
18	5583	24	2.1	197	Yes
19	5508	26	3.1	155	No
20	5509	24	2	220	Yes
21	5546	27	3.5	204	Yes
22	5598	24	2	200	Yes
23	5521	23	1	161	Yes
24	5588	24	1.9	230	Yes
25	5591	29	4.9	206	Yes
26	5552	26	3.1	210	Yes
27	5559	24	1.8	221	Yes
28	5635	29	4.5	227	Yes
29	5578	23	1	151	Yes
30	5565	23	1.3	216	Yes
Detection Rate: 96.7%					

802.11be (EHT160) 5570MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5591	16	7.3	378	Yes
2	5491	16	6.7	455	Yes
3	5608	16	6.6	473	Yes
4	5493	18	9	462	Yes
5	5649	16	6.6	436	Yes
6	5606	18	9.3	406	Yes
7	5587	17	7.5	213	No
8	5632	17	8.5	417	Yes
9	5577	17	7.7	317	No
10	5569	18	8.8	444	No
11	5501	17	7.9	223	No
12	5508	18	9.3	297	Yes
13	5553	16	6.6	495	No
14	5630	18	9.7	325	Yes
15	5504	18	9.3	221	Yes
16	5505	16	6.2	238	Yes
17	5527	17	8	247	No
18	5535	16	7.1	225	Yes
19	5534	17	8.1	361	Yes
20	5558	16	7	275	No
21	5588	17	8.5	306	Yes
22	5523	16	7	418	Yes
23	5538	16	6	327	No
24	5513	16	6.9	457	Yes
25	5621	18	9.9	328	Yes
26	5641	17	8.1	278	Yes
27	5634	16	6.8	366	No
28	5580	18	9.5	326	No
29	5495	16	6	380	Yes
30	5519	16	6.3	254	Yes
Detection Rate: 66.7%					

802.11be (EHT160) 5570MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5639	13	13.9	378	Yes
2	5558	12	12.7	455	No
3	5636	12	12.5	473	Yes
4	5574	15	17.7	462	No
5	5509	12	12.5	436	No
6	5614	16	18.3	406	Yes
7	5637	13	14.5	213	Yes
8	5544	15	16.5	417	No
9	5498	14	14.9	317	Yes
10	5507	15	17.2	444	No
11	5592	14	15.3	223	Yes
12	5518	16	18.3	297	Yes
13	5628	12	12.3	495	Yes
14	5560	16	19.3	325	Yes
15	5540	16	18.5	221	Yes
16	5490	12	11.5	238	No
17	5529	14	15.4	247	Yes
18	5499	13	13.4	225	No
19	5647	14	15.7	361	No
20	5589	13	13.2	275	Yes
21	5606	15	16.7	306	No
22	5511	13	13.4	418	Yes
23	5585	12	11	327	No
24	5613	13	13.1	457	No
25	5503	16	19.6	328	Yes
26	5515	14	15.8	278	Yes
27	5516	13	12.8	366	Yes
28	5633	16	18.8	326	Yes
29	5514	12	11	380	Yes
30	5645	12	11.7	254	Yes
Detection Rate: 63.3%					

802.11be (EHT160) 5570MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5570	LP_SIGNAL_01	Yes
2	5	5570	LP_SIGNAL_02	Yes
3	9	5570	LP_SIGNAL_03	No
4	19	5570	LP_SIGNAL_04	Yes
5	16	5570	LP_SIGNAL_05	Yes
6	12	5570	LP_SIGNAL_06	Yes
7	13	5570	LP_SIGNAL_07	Yes
8	10	5570	LP_SIGNAL_08	Yes
9	13	5570	LP_SIGNAL_09	No
10	6	5570	LP_SIGNAL_10	Yes
11	16	5497.23	LP_SIGNAL_11	Yes
12	19	5498.43	LP_SIGNAL_12	Yes
13	13	5496.03	LP_SIGNAL_13	Yes
14	10	5494.83	LP_SIGNAL_14	Yes
15	18	5498.03	LP_SIGNAL_15	Yes
16	12	5495.63	LP_SIGNAL_16	Yes
17	20	5498.83	LP_SIGNAL_17	Yes
18	10	5494.83	LP_SIGNAL_18	Yes
19	12	5495.63	LP_SIGNAL_19	Yes
20	10	5494.83	LP_SIGNAL_20	Yes
21	15	5642.23	LP_SIGNAL_21	Yes
22	9	5644.63	LP_SIGNAL_22	Yes
23	20	5640.23	LP_SIGNAL_23	Yes
24	12	5643.43	LP_SIGNAL_24	Yes
25	11	5643.83	LP_SIGNAL_25	Yes
26	5	5646.23	LP_SIGNAL_26	Yes
27	16	5641.83	LP_SIGNAL_27	Yes
28	19	5640.63	LP_SIGNAL_28	Yes
29	10	5644.23	LP_SIGNAL_29	Yes
30	17	5641.43	LP_SIGNAL_30	Yes
				Detection Rate: 93.3%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5570MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT240) 5610MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5497	22	1066.1	57	938	Yes
2	5723	10	1432.7	76	698	Yes
3	5691	6	1618.1	86	618	Yes
4	5680	2	1858.7	99	538	Yes
5	5703	19	1139	61	878	Yes
6	5495	23	326.2	18	3066	Yes
7	5498	7	1567.4	83	638	Yes
8	5581	21	1089.3	58	918	Yes
9	5496	17	1193.3	63	838	Yes
10	5499	18	1165.5	62	858	Yes
11	5531	15	1253.1	67	798	Yes
12	5656	11	1392.8	74	718	Yes
13	5502	4	1730.1	92	578	Yes
14	5503	5	1672.2	89	598	Yes
15	5586	3	1792.1	95	558	Yes
16	5672	-	394.3	21	2536	Yes
17	5666	-	1035.2	55	966	Yes
18	5694	-	1209.2	64	827	Yes
19	5614	-	399.8	22	2501	Yes
20	5565	-	385.4	21	2595	Yes
21	5662	-	897.7	48	1114	Yes
22	5511	-	768	41	1302	Yes
23	5716	-	328.4	18	3045	Yes
24	5584	-	615.8	33	1624	Yes
25	5556	-	347.5	19	2878	Yes
26	5715	-	973.7	52	1027	Yes
27	5500	-	402.4	22	2485	Yes
28	5718	-	625	33	1600	Yes
29	5633	-	853.2	46	1172	Yes
30	5519	-	849.6	45	1177	Yes
Detection Rate: 100%						

802.11be (EHT240) 5610MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5627	26	3.2	179	No
2	5618	23	1.1	207	Yes
3	5723	24	2.1	230	Yes
4	5586	29	4.8	200	Yes
5	5507	28	3.9	214	Yes
6	5563	26	2.9	222	Yes
7	5573	26	3.2	204	Yes
8	5497	25	2.5	192	Yes
9	5515	26	3.1	164	Yes
10	5686	23	1.2	156	Yes
11	5632	27	3.9	210	Yes
12	5691	29	4.6	201	Yes
13	5542	26	3.2	162	Yes
14	5665	25	2.2	197	Yes
15	5553	29	4.5	163	Yes
16	5666	26	3	203	Yes
17	5539	29	5	168	Yes
18	5508	25	2.4	217	Yes
19	5547	26	2.9	191	Yes
20	5643	25	2.3	166	Yes
21	5606	27	3.7	150	Yes
22	5601	25	2.2	176	Yes
23	5512	29	4.9	195	Yes
24	5558	26	2.9	202	No
25	5700	25	2.5	178	Yes
26	5681	23	1.1	206	Yes
27	5588	27	3.8	155	Yes
28	5501	29	4.7	157	Yes
29	5518	25	2.4	224	Yes
30	5589	28	4.2	159	Yes
Detection Rate: 93.3%					

802.11be (EHT240) 5610MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5598	17	8.2	355	Yes
2	5659	16	6.1	487	Yes
3	5700	16	7.1	344	No
4	5564	18	9.8	288	Yes
5	5501	18	8.9	230	Yes
6	5689	17	7.9	432	Yes
7	5725	17	8.2	207	Yes
8	5491	17	7.5	443	No
9	5516	17	8.1	439	Yes
10	5499	16	6.2	223	Yes
11	5665	18	8.9	208	No
12	5609	18	9.6	463	Yes
13	5654	17	8.2	441	Yes
14	5527	16	7.2	323	Yes
15	5512	18	9.5	297	Yes
16	5507	17	8	412	Yes
17	5614	18	10	324	Yes
18	5505	17	7.4	271	Yes
19	5708	17	7.9	349	No
20	5691	16	7.3	409	Yes
21	5503	18	8.7	373	Yes
22	5648	16	7.2	254	Yes
23	5504	18	9.9	274	Yes
24	5714	17	7.9	278	Yes
25	5711	17	7.5	317	No
26	5612	16	6.1	260	Yes
27	5602	18	8.8	211	Yes
28	5628	18	9.7	272	Yes
29	5651	17	7.4	264	Yes
30	5519	18	9.2	284	Yes
Detection Rate: 83.3%					

802.11be (EHT240) 5610MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5595	14	16	355	Yes
2	5491	12	11.3	487	No
3	5492	13	13.5	344	No
4	5598	16	19.4	288	Yes
5	5697	15	17.5	230	Yes
6	5506	14	15.3	432	Yes
7	5643	14	15.9	207	No
8	5639	13	14.3	443	Yes
9	5597	14	15.8	439	Yes
10	5641	12	11.5	223	Yes
11	5607	15	17.4	208	Yes
12	5689	16	19	463	Yes
13	5502	14	16	441	Yes
14	5649	13	13.8	323	Yes
15	5504	16	18.9	297	Yes
16	5505	14	15.5	412	No
17	5495	16	19.9	324	No
18	5610	13	14.1	271	Yes
19	5512	14	15.2	349	No
20	5509	13	13.8	409	No
21	5529	15	17.1	373	Yes
22	5567	13	13.8	254	No
23	5514	16	19.8	274	No
24	5531	14	15.3	278	Yes
25	5523	13	14.5	317	Yes
26	5613	12	11.3	260	Yes
27	5695	15	17.3	211	Yes
28	5618	16	19.2	272	Yes
29	5682	13	14.2	264	Yes
30	5717	15	18.2	284	Yes
Detection Rate: 70%					

802.11be (EHT240) 5610MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5610	LP_SIGNAL_01	Yes
2	5	5610	LP_SIGNAL_02	Yes
3	9	5610	LP_SIGNAL_03	Yes
4	19	5610	LP_SIGNAL_04	Yes
5	16	5610	LP_SIGNAL_05	Yes
6	12	5610	LP_SIGNAL_06	Yes
7	13	5610	LP_SIGNAL_07	Yes
8	10	5610	LP_SIGNAL_08	Yes
9	13	5610	LP_SIGNAL_09	Yes
10	6	5610	LP_SIGNAL_10	Yes
11	16	5497.38	LP_SIGNAL_11	Yes
12	19	5498.58	LP_SIGNAL_12	Yes
13	13	5496.18	LP_SIGNAL_13	Yes
14	10	5494.98	LP_SIGNAL_14	Yes
15	18	5498.18	LP_SIGNAL_15	Yes
16	12	5495.78	LP_SIGNAL_16	Yes
17	20	5498.98	LP_SIGNAL_17	Yes
18	10	5494.98	LP_SIGNAL_18	Yes
19	12	5495.78	LP_SIGNAL_19	Yes
20	10	5494.98	LP_SIGNAL_20	Yes
21	15	5718.62	LP_SIGNAL_21	Yes
22	9	5721.02	LP_SIGNAL_22	Yes
23	20	5716.62	LP_SIGNAL_23	Yes
24	12	5719.82	LP_SIGNAL_24	Yes
25	11	5720.22	LP_SIGNAL_25	Yes
26	5	5722.62	LP_SIGNAL_26	Yes
27	16	5718.22	LP_SIGNAL_27	Yes
28	19	5717.02	LP_SIGNAL_28	Yes
29	10	5720.62	LP_SIGNAL_29	Yes
30	17	5717.82	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT240) 5610MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

Internal

Master

Radar Type	Number of Trials (Times)	Percentage of Successful Detection						Minimum Percentage of Successful Detection	Test Result
		802.11be (EHT20)	802.11be (EHT40)	802.11be (EHT80)	802.11be (EHT160) CH50	802.11be (EHT160) CH114	802.11be (EHT240)		
1	30	100.0%	100.0%	93.3%	96.7%	100.0%	96.7%	60%	Pass
2	30	90.0%	90.0%	90.0%	80.0%	83.3%	93.3%	60%	Pass
3	30	90.0%	83.3%	96.7%	93.3%	90.0%	80.0%	60%	Pass
4	30	93.3%	80.0%	86.7%	76.7%	90.0%	76.7%	60%	Pass
Aggregate (Radar Types 1 - 4)		93.3%	88.3%	91.7%	86.7%	90.8%	86.7%	80%	Pass
5	30	100.0%	100.0%	93.3%	96.7%	100.0%	96.7%	80%	Pass
6	30	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	70%	Pass

802.11be (EHT20) 5500MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5490	22	1066.1	57	938	Yes
2	5497	10	1432.7	76	698	Yes
3	5493	6	1618.1	86	618	Yes
4	5494	2	1858.7	99	538	Yes
5	5501	19	1139	61	878	Yes
6	5506	23	326.2	18	3066	Yes
7	5505	7	1567.4	83	638	Yes
8	5503	21	1089.3	58	918	Yes
9	5491	17	1193.3	63	838	Yes
10	5496	18	1165.5	62	858	Yes
11	5492	15	1253.1	67	798	Yes
12	5499	11	1392.8	74	718	Yes
13	5502	4	1730.1	92	578	Yes
14	5495	5	1672.2	89	598	Yes
15	5510	3	1792.1	95	558	Yes
16	5504	-	394.3	21	2536	Yes
17	5498	-	1035.2	55	966	Yes
18	5509	-	1209.2	64	827	Yes
19	5500	-	399.8	22	2501	Yes
20	5507	-	385.4	21	2595	Yes
21	5508	-	897.7	48	1114	Yes
22	5490	-	768	41	1302	Yes
23	5505	-	328.4	18	3045	Yes
24	5509	-	615.8	33	1624	Yes
25	5496	-	347.5	19	2878	Yes
26	5494	-	973.7	52	1027	Yes
27	5506	-	402.4	22	2485	Yes
28	5503	-	625	33	1600	Yes
29	5497	-	853.2	46	1172	Yes
30	5502	-	849.6	45	1177	Yes
Detection Rate: 100%						

802.11be (EHT20) 5500MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	26	3.2	179	No
2	5510	23	1.1	207	Yes
3	5503	24	2.1	230	Yes
4	5509	29	4.8	200	Yes
5	5495	28	3.9	214	Yes
6	5505	26	2.9	222	No
7	5496	26	3.2	204	Yes
8	5492	25	2.5	192	Yes
9	5491	26	3.1	164	Yes
10	5499	23	1.2	156	Yes
11	5500	27	3.9	210	Yes
12	5507	29	4.6	201	Yes
13	5494	26	3.2	162	Yes
14	5506	25	2.2	197	Yes
15	5493	29	4.5	163	Yes
16	5508	26	3	203	Yes
17	5497	29	5	168	Yes
18	5501	25	2.4	217	Yes
19	5498	26	2.9	191	Yes
20	5502	25	2.3	166	Yes
21	5504	27	3.7	150	Yes
22	5505	25	2.2	176	No
23	5501	29	4.9	195	Yes
24	5504	26	2.9	202	Yes
25	5496	25	2.5	178	Yes
26	5502	23	1.1	206	Yes
27	5497	27	3.8	155	Yes
28	5509	29	4.7	157	Yes
29	5492	25	2.4	224	Yes
30	5495	28	4.2	159	Yes
Detection Rate: 90%					

802.11be (EHT20) 5500MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	17	8.2	355	Yes
2	5492	16	6.1	487	Yes
3	5499	16	7.1	344	No
4	5498	18	9.8	288	Yes
5	5509	18	8.9	230	Yes
6	5507	17	7.9	432	Yes
7	5496	17	8.2	207	No
8	5500	17	7.5	443	Yes
9	5497	17	8.1	439	Yes
10	5501	16	6.2	223	Yes
11	5506	18	8.9	208	Yes
12	5504	18	9.6	463	Yes
13	5502	17	8.2	441	Yes
14	5493	16	7.2	323	Yes
15	5494	18	9.5	297	Yes
16	5491	17	8	412	Yes
17	5510	18	10	324	Yes
18	5503	17	7.4	271	Yes
19	5505	17	7.9	349	Yes
20	5495	16	7.3	409	Yes
21	5508	18	8.7	373	Yes
22	5509	16	7.2	254	Yes
23	5508	18	9.9	274	Yes
24	5503	17	7.9	278	Yes
25	5501	17	7.5	317	Yes
26	5505	16	6.1	260	Yes
27	5507	18	8.8	211	No
28	5498	18	9.7	272	Yes
29	5500	17	7.4	264	Yes
30	5496	18	9.2	284	Yes
Detection Rate: 90%					

802.11be (EHT20) 5500MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5506	14	16	355	Yes
2	5504	12	11.3	487	Yes
3	5502	13	13.5	344	Yes
4	5493	16	19.4	288	Yes
5	5494	15	17.5	230	Yes
6	5508	14	15.3	432	Yes
7	5505	14	15.9	207	Yes
8	5492	13	14.3	443	Yes
9	5509	14	15.8	439	Yes
10	5497	12	11.5	223	Yes
11	5491	15	17.4	208	Yes
12	5500	16	19	463	Yes
13	5499	14	16	441	No
14	5498	13	13.8	323	Yes
15	5490	16	18.9	297	Yes
16	5495	14	15.5	412	Yes
17	5501	16	19.9	324	Yes
18	5507	13	14.1	271	No
19	5503	14	15.2	349	Yes
20	5496	13	13.8	409	Yes
21	5510	15	17.1	373	Yes
22	5498	13	13.8	254	Yes
23	5510	16	19.8	274	Yes
24	5493	14	15.3	278	Yes
25	5504	13	14.5	317	Yes
26	5491	12	11.3	260	Yes
27	5508	15	17.3	211	Yes
28	5505	16	19.2	272	Yes
29	5494	13	14.2	264	Yes
30	5503	15	18.2	284	Yes
Detection Rate: 93.3%					

802.11be (EHT20) 5500MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5500	LP_SIGNAL_01	Yes
2	5	5500	LP_SIGNAL_02	Yes
3	9	5500	LP_SIGNAL_03	Yes
4	19	5500	LP_SIGNAL_04	Yes
5	16	5500	LP_SIGNAL_05	Yes
6	12	5500	LP_SIGNAL_06	Yes
7	13	5500	LP_SIGNAL_07	Yes
8	10	5500	LP_SIGNAL_08	Yes
9	13	5500	LP_SIGNAL_09	Yes
10	6	5500	LP_SIGNAL_10	Yes
11	16	5496.84	LP_SIGNAL_11	Yes
12	19	5498.04	LP_SIGNAL_12	Yes
13	13	5495.64	LP_SIGNAL_13	Yes
14	10	5494.44	LP_SIGNAL_14	Yes
15	18	5497.64	LP_SIGNAL_15	Yes
16	12	5495.24	LP_SIGNAL_16	Yes
17	20	5498.44	LP_SIGNAL_17	Yes
18	10	5494.44	LP_SIGNAL_18	Yes
19	12	5495.24	LP_SIGNAL_19	Yes
20	10	5494.44	LP_SIGNAL_20	Yes
21	15	5503.51	LP_SIGNAL_21	Yes
22	9	5505.91	LP_SIGNAL_22	Yes
23	20	5501.51	LP_SIGNAL_23	Yes
24	12	5504.71	LP_SIGNAL_24	Yes
25	11	5505.11	LP_SIGNAL_25	Yes
26	5	5507.51	LP_SIGNAL_26	Yes
27	16	5503.11	LP_SIGNAL_27	Yes
28	19	5501.91	LP_SIGNAL_28	Yes
29	10	5505.51	LP_SIGNAL_29	Yes
30	17	5502.71	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT20) 5500MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT40) 5510MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5525	23	326.2	18	3066	Yes
2	5491	9	1474.9	78	678	Yes
3	5517	16	1222.5	65	818	Yes
4	5530	5	1672.2	89	598	Yes
5	5519	7	1567.4	83	638	Yes
6	5513	15	1253.1	67	798	Yes
7	5497	12	1355	72	738	Yes
8	5504	20	1113.6	59	898	Yes
9	5500	11	1392.8	74	718	Yes
10	5502	3	1792.1	95	558	Yes
11	5492	19	1139	61	878	Yes
12	5499	17	1193.3	63	838	Yes
13	5506	2	1858.7	99	538	Yes
14	5503	8	1519.8	81	658	Yes
15	5493	22	1066.1	57	938	Yes
16	5505	-	1065	57	939	Yes
17	5501	-	499	27	2004	Yes
18	5498	-	627.7	34	1593	Yes
19	5520	-	636.5	34	1571	Yes
20	5494	-	1179.2	63	848	Yes
21	5495	-	370.8	20	2697	Yes
22	5523	-	590.7	32	1693	Yes
23	5512	-	557.7	30	1793	Yes
24	5524	-	989.1	53	1011	Yes
25	5490	-	349.4	19	2862	Yes
26	5510	-	997	53	1003	Yes
27	5516	-	363.5	20	2751	Yes
28	5509	-	492.9	27	2029	Yes
29	5511	-	1326.3	70	754	Yes
30	5518	-	803.2	43	1245	Yes
Detection Rate: 100%						

802.11be (EHT40) 5510MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5513	29	4.9	210	Yes
2	5528	24	1.7	178	No
3	5498	25	2.1	173	Yes
4	5493	28	4	222	Yes
5	5517	27	3.6	219	Yes
6	5521	29	5	212	Yes
7	5522	29	4.9	176	No
8	5511	23	1.1	199	Yes
9	5494	23	1.2	162	Yes
10	5516	29	4.5	220	Yes
11	5526	29	5	229	Yes
12	5504	29	5	214	No
13	5490	25	2.4	153	Yes
14	5503	28	4.1	197	Yes
15	5495	24	2	211	Yes
16	5492	29	4.6	190	Yes
17	5519	23	1	213	Yes
18	5512	25	2.4	218	Yes
19	5514	26	3.2	215	Yes
20	5509	26	3.1	157	Yes
21	5497	25	2.7	168	Yes
22	5502	25	2.6	227	Yes
23	5508	24	2	171	Yes
24	5496	23	1.1	158	Yes
25	5530	23	1	167	Yes
26	5510	29	4.9	150	Yes
27	5524	29	4.8	191	Yes
28	5501	25	2.3	159	Yes
29	5518	28	4.3	226	Yes
30	5525	26	3.3	208	Yes
Detection Rate: 90%					

802.11be (EHT40) 5510MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5499	18	9.9	235	Yes
2	5491	16	6.7	357	No
3	5490	16	7.1	333	No
4	5520	18	9	242	Yes
5	5498	17	8.6	397	Yes
6	5495	18	10	302	Yes
7	5512	18	9.9	203	Yes
8	5493	16	6.1	428	Yes
9	5503	16	6.2	335	Yes
10	5528	18	9.5	240	Yes
11	5497	18	10	224	Yes
12	5516	18	10	410	Yes
13	5522	17	7.4	359	Yes
14	5515	18	9.1	269	Yes
15	5501	16	7	250	Yes
16	5525	18	9.6	247	Yes
17	5513	16	6	222	Yes
18	5500	17	7.4	424	Yes
19	5509	17	8.2	393	Yes
20	5517	17	8.1	382	Yes
21	5521	17	7.7	486	Yes
22	5511	17	7.6	480	Yes
23	5502	16	7	360	Yes
24	5524	16	6.1	297	No
25	5504	16	6	265	No
26	5494	18	9.9	263	Yes
27	5529	18	9.8	324	Yes
28	5492	17	7.3	386	Yes
29	5508	18	9.3	311	Yes
30	5518	17	8.3	378	No
Detection Rate: 83.3%					

802.11be (EHT40) 5510MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	16	19.7	235	No
2	5497	12	12.7	357	Yes
3	5526	13	13.6	333	Yes
4	5506	15	17.7	242	Yes
5	5495	15	16.8	397	Yes
6	5525	16	20	302	Yes
7	5520	16	19.7	203	No
8	5512	12	11.3	428	Yes
9	5500	12	11.5	335	Yes
10	5524	16	18.8	240	Yes
11	5517	16	20	224	Yes
12	5508	16	20	410	Yes
13	5503	13	14.2	359	Yes
14	5507	15	18	269	Yes
15	5504	13	13.3	250	No
16	5505	16	19	247	No
17	5491	12	11.1	222	Yes
18	5518	13	14.2	424	Yes
19	5528	14	15.9	393	Yes
20	5494	14	15.8	382	Yes
21	5521	14	14.8	486	Yes
22	5527	13	14.6	480	Yes
23	5522	13	13.2	360	Yes
24	5511	12	11.3	297	Yes
25	5515	12	11	265	Yes
26	5501	16	19.6	263	Yes
27	5516	16	19.6	324	Yes
28	5519	13	14	386	No
29	5510	16	18.3	311	No
30	5498	14	16.1	378	Yes
Detection Rate: 80%					

802.11be (EHT40) 5510MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	20	5510	LP_SIGNAL_01	Yes
2	8	5510	LP_SIGNAL_02	Yes
3	9	5510	LP_SIGNAL_03	Yes
4	16	5510	LP_SIGNAL_04	Yes
5	15	5510	LP_SIGNAL_05	Yes
6	20	5510	LP_SIGNAL_06	Yes
7	20	5510	LP_SIGNAL_07	Yes
8	5	5510	LP_SIGNAL_08	Yes
9	5	5510	LP_SIGNAL_09	Yes
10	18	5510	LP_SIGNAL_10	Yes
11	20	5498.97	LP_SIGNAL_11	Yes
12	20	5498.97	LP_SIGNAL_12	Yes
13	10	5494.97	LP_SIGNAL_13	Yes
14	17	5497.77	LP_SIGNAL_14	Yes
15	9	5494.57	LP_SIGNAL_15	Yes
16	19	5498.57	LP_SIGNAL_16	Yes
17	5	5492.97	LP_SIGNAL_17	Yes
18	10	5494.97	LP_SIGNAL_18	Yes
19	13	5496.17	LP_SIGNAL_19	Yes
20	13	5496.17	LP_SIGNAL_20	Yes
21	11	5524.89	LP_SIGNAL_21	Yes
22	11	5524.89	LP_SIGNAL_22	Yes
23	9	5525.69	LP_SIGNAL_23	Yes
24	5	5527.29	LP_SIGNAL_24	Yes
25	5	5527.29	LP_SIGNAL_25	Yes
26	20	5521.29	LP_SIGNAL_26	Yes
27	20	5521.29	LP_SIGNAL_27	Yes
28	10	5525.29	LP_SIGNAL_28	Yes
29	17	5522.49	LP_SIGNAL_29	Yes
30	13	5524.09	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT40) 5510MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT80) 5530MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5568	18	1165.5	62	858	Yes
2	5550	20	1113.6	59	898	Yes
3	5546	8	1519.8	81	658	No
4	5524	19	1139	61	878	Yes
5	5509	6	1618.1	86	618	Yes
6	5495	12	1355	72	738	Yes
7	5496	5	1672.2	89	598	Yes
8	5513	7	1567.4	83	638	Yes
9	5493	22	1066.1	57	938	Yes
10	5499	2	1858.7	99	538	Yes
11	5521	9	1474.9	78	678	Yes
12	5552	14	1285.3	68	778	Yes
13	5512	21	1089.3	58	918	Yes
14	5506	10	1432.7	76	698	Yes
15	5497	3	1792.1	95	558	Yes
16	5539	-	327.8	18	3051	Yes
17	5545	-	425.4	23	2351	Yes
18	5507	-	1085.8	58	921	Yes
19	5570	-	643.1	34	1555	Yes
20	5525	-	386.1	21	2590	Yes
21	5541	-	635.7	34	1573	Yes
22	5501	-	1733.1	92	577	Yes
23	5559	-	479.2	26	2087	Yes
24	5554	-	1003	53	997	Yes
25	5544	-	424.1	23	2358	No
26	5498	-	638.6	34	1566	Yes
27	5516	-	412.5	22	2424	Yes
28	5494	-	501.5	27	1994	Yes
29	5522	-	520	28	1923	Yes
30	5564	-	1412.4	75	708	Yes
Detection Rate: 93.3%						

802.11be (EHT80) 5530MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5549	23	1.3	228	Yes
2	5491	26	3.2	172	Yes
3	5568	27	3.9	212	Yes
4	5522	24	1.9	213	Yes
5	5505	27	3.6	150	Yes
6	5495	26	3.3	158	Yes
7	5513	29	4.9	210	Yes
8	5526	23	1.3	223	Yes
9	5527	29	4.9	152	Yes
10	5535	27	3.3	190	Yes
11	5507	25	2.7	203	Yes
12	5556	29	5	227	Yes
13	5504	26	3.3	196	Yes
14	5520	28	4.4	198	Yes
15	5565	24	1.9	161	Yes
16	5494	27	3.6	226	Yes
17	5538	26	2.8	181	No
18	5499	25	2.5	167	Yes
19	5508	23	1.3	178	No
20	5564	25	2.4	187	No
21	5541	29	4.8	153	Yes
22	5567	27	3.5	201	Yes
23	5516	23	1.3	166	Yes
24	5511	29	4.8	155	Yes
25	5543	28	4.3	221	Yes
26	5552	26	3.2	191	Yes
27	5566	24	1.7	192	Yes
28	5515	23	1.2	164	Yes
29	5518	25	2.4	154	Yes
30	5519	29	5	207	Yes
Detection Rate: 90%					

802.11be (EHT80) 5530MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5511	16	6.3	403	Yes
2	5491	17	8.2	313	Yes
3	5517	18	8.9	214	Yes
4	5556	16	6.9	262	Yes
5	5535	17	8.6	273	Yes
6	5495	17	8.3	470	Yes
7	5537	18	9.9	453	Yes
8	5497	16	6.3	378	Yes
9	5519	18	9.9	483	Yes
10	5506	17	8.3	317	Yes
11	5568	17	7.7	385	Yes
12	5490	18	10	275	Yes
13	5569	17	8.3	497	Yes
14	5507	18	9.4	420	Yes
15	5534	16	6.9	366	Yes
16	5554	17	8.6	414	Yes
17	5499	17	7.8	444	Yes
18	5522	17	7.5	427	Yes
19	5531	16	6.3	338	No
20	5509	17	7.4	436	Yes
21	5562	18	9.8	265	Yes
22	5541	17	8.5	451	Yes
23	5529	16	6.3	274	Yes
24	5505	18	9.8	417	Yes
25	5514	18	9.3	330	Yes
26	5553	17	8.2	472	Yes
27	5539	16	6.7	333	Yes
28	5504	16	6.2	377	Yes
29	5512	17	7.4	394	Yes
30	5494	18	10	296	Yes
Detection Rate: 96.7%					

802.11be (EHT80) 5530MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	12	11.7	403	Yes
2	5496	14	15.9	313	Yes
3	5499	15	17.4	214	Yes
4	5514	13	13.2	262	Yes
5	5543	15	16.8	273	Yes
6	5495	14	16.1	470	Yes
7	5505	16	19.8	453	Yes
8	5532	12	11.7	378	Yes
9	5566	16	19.8	483	Yes
10	5563	14	16.2	317	Yes
11	5500	14	14.8	385	Yes
12	5501	16	19.9	275	Yes
13	5502	14	16.1	497	Yes
14	5544	16	18.6	420	Yes
15	5527	13	13.2	366	Yes
16	5524	15	16.9	414	Yes
17	5547	14	15	444	Yes
18	5541	13	14.4	427	No
19	5508	12	11.7	338	Yes
20	5492	13	14.2	436	No
21	5515	16	19.6	265	Yes
22	5511	15	16.5	451	Yes
23	5569	12	11.7	274	Yes
24	5535	16	19.4	417	Yes
25	5523	16	18.3	330	Yes
26	5553	14	15.9	472	No
27	5519	12	12.5	333	No
28	5517	12	11.5	377	Yes
29	5528	13	14.2	394	Yes
30	5561	16	19.8	296	Yes
Detection Rate: 86.7%					

802.11be (EHT80) 5530MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	6	5530	LP_SIGNAL_01	No
2	13	5530	LP_SIGNAL_02	Yes
3	16	5530	LP_SIGNAL_03	Yes
4	8	5530	LP_SIGNAL_04	Yes
5	15	5530	LP_SIGNAL_05	Yes
6	14	5530	LP_SIGNAL_06	Yes
7	20	5530	LP_SIGNAL_07	Yes
8	6	5530	LP_SIGNAL_08	Yes
9	20	5530	LP_SIGNAL_09	Yes
10	14	5530	LP_SIGNAL_10	Yes
11	11	5495.47	LP_SIGNAL_11	Yes
12	20	5499.07	LP_SIGNAL_12	Yes
13	14	5496.67	LP_SIGNAL_13	Yes
14	18	5498.27	LP_SIGNAL_14	Yes
15	8	5494.27	LP_SIGNAL_15	Yes
16	15	5497.07	LP_SIGNAL_16	Yes
17	12	5495.87	LP_SIGNAL_17	Yes
18	11	5495.47	LP_SIGNAL_18	Yes
19	6	5493.47	LP_SIGNAL_19	Yes
20	10	5495.07	LP_SIGNAL_20	Yes
21	20	5560.72	LP_SIGNAL_21	Yes
22	14	5563.12	LP_SIGNAL_22	Yes
23	6	5566.32	LP_SIGNAL_23	Yes
24	19	5561.12	LP_SIGNAL_24	Yes
25	17	5561.92	LP_SIGNAL_25	Yes
26	13	5563.52	LP_SIGNAL_26	Yes
27	7	5565.92	LP_SIGNAL_27	Yes
28	5	5566.72	LP_SIGNAL_28	No
29	10	5564.72	LP_SIGNAL_29	Yes
30	20	5560.72	LP_SIGNAL_30	Yes
				Detection Rate: 93.3%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT80) 5530MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5267	18	1165.5	62	858	Yes
2	5313	20	1113.6	59	898	Yes
3	5252	8	1519.8	81	658	Yes
4	5311	19	1139	61	878	Yes
5	5302	6	1618.1	86	618	Yes
6	5287	12	1355	72	738	Yes
7	5262	5	1672.2	89	598	Yes
8	5257	7	1567.4	83	638	Yes
9	5258	22	1066.1	57	938	Yes
10	5292	2	1858.7	99	538	Yes
11	5265	9	1474.9	78	678	Yes
12	5261	14	1285.3	68	778	Yes
13	5326	21	1089.3	58	918	Yes
14	5314	10	1432.7	76	698	Yes
15	5264	3	1792.1	95	558	Yes
16	5308	-	327.8	18	3051	Yes
17	5255	-	425.4	23	2351	Yes
18	5279	-	1085.8	58	921	Yes
19	5256	-	643.1	34	1555	No
20	5253	-	386.1	21	2590	Yes
21	5260	-	635.7	34	1573	Yes
22	5271	-	1733.1	92	577	Yes
23	5273	-	479.2	26	2087	Yes
24	5254	-	1003	53	997	Yes
25	5307	-	424.1	23	2358	Yes
26	5305	-	638.6	34	1566	Yes
27	5325	-	412.5	22	2424	Yes
28	5322	-	501.5	27	1994	Yes
29	5290	-	520	28	1923	Yes
30	5321	-	1412.4	75	708	Yes
Detection Rate: 96.7%						

802.11be (EHT160) 5250MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5282	23	1.3	228	Yes
2	5312	26	3.2	172	Yes
3	5311	27	3.9	212	Yes
4	5315	24	1.9	213	No
5	5254	27	3.6	150	Yes
6	5275	26	3.3	158	Yes
7	5283	29	4.9	210	Yes
8	5257	23	1.3	223	Yes
9	5266	29	4.9	152	Yes
10	5259	27	3.3	190	Yes
11	5273	25	2.7	203	Yes
12	5261	29	5	227	Yes
13	5260	26	3.3	196	Yes
14	5297	28	4.4	198	Yes
15	5293	24	1.9	161	Yes
16	5265	27	3.6	226	Yes
17	5330	26	2.8	181	No
18	5294	25	2.5	167	Yes
19	5327	23	1.3	178	No
20	5269	25	2.4	187	No
21	5258	29	4.8	153	Yes
22	5267	27	3.5	201	Yes
23	5286	23	1.3	166	Yes
24	5281	29	4.8	155	Yes
25	5274	28	4.3	221	No
26	5264	26	3.2	191	No
27	5302	24	1.7	192	Yes
28	5305	23	1.2	164	Yes
29	5278	25	2.4	154	Yes
30	5304	29	5	207	Yes
Detection Rate: 80%					

802.11be (EHT160) 5250MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5315	16	6.3	403	Yes
2	5295	17	8.2	313	Yes
3	5300	18	8.9	214	Yes
4	5262	16	6.9	262	Yes
5	5272	17	8.6	273	Yes
6	5303	17	8.3	470	Yes
7	5310	18	9.9	453	Yes
8	5260	16	6.3	378	Yes
9	5325	18	9.9	483	Yes
10	5292	17	8.3	317	Yes
11	5261	17	7.7	385	No
12	5250	18	10	275	Yes
13	5312	17	8.3	497	Yes
14	5253	18	9.4	420	Yes
15	5330	16	6.9	366	Yes
16	5316	17	8.6	414	Yes
17	5271	17	7.8	444	No
18	5267	17	7.5	427	Yes
19	5277	16	6.3	338	Yes
20	5255	17	7.4	436	Yes
21	5287	18	9.8	265	Yes
22	5289	17	8.5	451	Yes
23	5296	16	6.3	274	Yes
24	5273	18	9.8	417	Yes
25	5319	18	9.3	330	Yes
26	5275	17	8.2	472	Yes
27	5276	16	6.7	333	Yes
28	5299	16	6.2	377	Yes
29	5320	17	7.4	394	Yes
30	5270	18	10	296	Yes
Detection Rate: 93.3%					

802.11be (EHT160) 5250MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5275	12	11.7	403	Yes
2	5328	14	15.9	313	Yes
3	5252	15	17.4	214	Yes
4	5291	13	13.2	262	Yes
5	5251	15	16.8	273	Yes
6	5288	14	16.1	470	Yes
7	5309	16	19.8	453	Yes
8	5270	12	11.7	378	Yes
9	5259	16	19.8	483	No
10	5296	14	16.2	317	Yes
11	5282	14	14.8	385	Yes
12	5255	16	19.9	275	Yes
13	5262	14	16.1	497	Yes
14	5308	16	18.6	420	Yes
15	5264	13	13.2	366	No
16	5279	15	16.9	414	No
17	5303	14	15	444	Yes
18	5304	13	14.4	427	No
19	5289	12	11.7	338	Yes
20	5266	13	14.2	436	No
21	5292	16	19.6	265	Yes
22	5295	15	16.5	451	Yes
23	5297	12	11.7	274	Yes
24	5273	16	19.4	417	Yes
25	5257	16	18.3	330	Yes
26	5310	14	15.9	472	Yes
27	5276	12	12.5	333	No
28	5274	12	11.5	377	Yes
29	5281	13	14.2	394	No
30	5254	16	19.8	296	Yes
Detection Rate: 76.7%					

802.11be (EHT160) 5250MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5290	LP_SIGNAL_01	Yes
2	5	5290	LP_SIGNAL_02	Yes
3	9	5290	LP_SIGNAL_03	Yes
4	19	5290	LP_SIGNAL_04	Yes
5	16	5290	LP_SIGNAL_05	Yes
6	12	5290	LP_SIGNAL_06	Yes
7	13	5290	LP_SIGNAL_07	Yes
8	10	5290	LP_SIGNAL_08	Yes
9	13	5290	LP_SIGNAL_09	Yes
10	6	5290	LP_SIGNAL_10	Yes
11	16	5256.4	LP_SIGNAL_11	Yes
12	19	5257.6	LP_SIGNAL_12	Yes
13	13	5255.2	LP_SIGNAL_13	Yes
14	10	5254	LP_SIGNAL_14	Yes
15	18	5257.2	LP_SIGNAL_15	Yes
16	12	5254.8	LP_SIGNAL_16	Yes
17	20	5258	LP_SIGNAL_17	Yes
18	10	5254	LP_SIGNAL_18	Yes
19	12	5254.8	LP_SIGNAL_19	Yes
20	10	5254	LP_SIGNAL_20	Yes
21	15	5322.11	LP_SIGNAL_21	Yes
22	9	5324.51	LP_SIGNAL_22	Yes
23	20	5320.11	LP_SIGNAL_23	Yes
24	12	5323.31	LP_SIGNAL_24	Yes
25	11	5323.71	LP_SIGNAL_25	Yes
26	5	5326.11	LP_SIGNAL_26	No
27	16	5321.71	LP_SIGNAL_27	Yes
28	19	5320.51	LP_SIGNAL_28	Yes
29	10	5324.11	LP_SIGNAL_29	Yes
30	17	5321.31	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5250MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT160) 5570MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5573	22	1066.1	57	938	Yes
2	5491	1	1930.5	102	518	Yes
3	5586	2	1858.7	99	538	Yes
4	5599	21	1089.3	58	918	Yes
5	5643	15	1253.1	67	798	Yes
6	5644	18	1165.5	62	858	Yes
7	5496	9	1474.9	78	678	Yes
8	5567	16	1222.5	65	818	Yes
9	5519	11	1392.8	74	718	Yes
10	5499	8	1519.8	81	658	Yes
11	5525	6	1618.1	86	618	Yes
12	5523	19	1139	61	878	Yes
13	5543	17	1193.3	63	838	Yes
14	5640	23	326.2	18	3066	Yes
15	5649	7	1567.4	83	638	Yes
16	5594	-	596.3	32	1677	Yes
17	5557	-	404.5	22	2472	Yes
18	5548	-	610.1	33	1639	Yes
19	5508	-	498.5	27	2006	Yes
20	5509	-	761	41	1314	Yes
21	5552	-	390.8	21	2559	Yes
22	5533	-	925.9	49	1080	Yes
23	5517	-	986.2	53	1014	Yes
24	5578	-	373.3	20	2679	Yes
25	5615	-	914.9	49	1093	Yes
26	5624	-	784.3	42	1275	Yes
27	5627	-	770.4	41	1298	Yes
28	5622	-	349.5	19	2861	Yes
29	5512	-	397	21	2519	Yes
30	5565	-	963.4	51	1038	Yes
Detection Rate: 100%						

802.11be (EHT160) 5570MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5629	25	2.3	199	Yes
2	5491	24	1.7	229	Yes
3	5577	24	1.6	169	Yes
4	5538	28	4	218	Yes
5	5528	24	1.6	185	No
6	5504	28	4.3	196	Yes
7	5505	25	2.5	160	Yes
8	5610	27	3.5	167	Yes
9	5560	26	2.7	176	No
10	5499	27	3.8	209	Yes
11	5566	26	2.9	180	No
12	5587	28	4.3	157	Yes
13	5552	24	1.6	181	No
14	5637	29	4.7	162	Yes
15	5511	28	4.3	182	No
16	5507	23	1.2	215	Yes
17	5586	26	3	205	Yes
18	5575	24	2.1	197	Yes
19	5508	26	3.1	155	Yes
20	5650	24	2	220	Yes
21	5555	27	3.5	204	Yes
22	5520	24	2	200	Yes
23	5593	23	1	161	Yes
24	5580	24	1.9	230	Yes
25	5649	29	4.9	206	Yes
26	5594	26	3.1	210	Yes
27	5639	24	1.8	221	Yes
28	5541	29	4.5	227	Yes
29	5612	23	1	151	Yes
30	5585	23	1.3	216	Yes
Detection Rate: 83.3%					

802.11be (EHT160) 5570MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5639	16	7.3	378	Yes
2	5547	16	6.7	455	No
3	5603	16	6.6	473	Yes
4	5493	18	9	462	Yes
5	5572	16	6.6	436	Yes
6	5606	18	9.3	406	Yes
7	5586	17	7.5	213	Yes
8	5552	17	8.5	417	Yes
9	5543	17	7.7	317	No
10	5649	18	8.8	444	Yes
11	5500	17	7.9	223	Yes
12	5622	18	9.3	297	Yes
13	5539	16	6.6	495	Yes
14	5544	18	9.7	325	Yes
15	5555	18	9.3	221	Yes
16	5619	16	6.2	238	No
17	5506	17	8	247	Yes
18	5546	16	7.1	225	Yes
19	5524	17	8.1	361	Yes
20	5627	16	7	275	Yes
21	5596	17	8.5	306	Yes
22	5580	16	7	418	Yes
23	5496	16	6	327	Yes
24	5565	16	6.9	457	Yes
25	5568	18	9.9	328	Yes
26	5503	17	8.1	278	Yes
27	5561	16	6.8	366	Yes
28	5629	18	9.5	326	Yes
29	5504	16	6	380	Yes
30	5602	16	6.3	254	Yes
Detection Rate: 90%					

802.11be (EHT160) 5570MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5599	13	13.9	378	No
2	5646	12	12.7	455	Yes
3	5541	12	12.5	473	Yes
4	5521	15	17.7	462	Yes
5	5647	12	12.5	436	Yes
6	5502	16	18.3	406	Yes
7	5619	13	14.5	213	Yes
8	5572	15	16.5	417	Yes
9	5571	14	14.9	317	Yes
10	5598	15	17.2	444	Yes
11	5500	14	15.3	223	Yes
12	5583	16	18.3	297	Yes
13	5495	12	12.3	495	No
14	5503	16	19.3	325	Yes
15	5562	16	18.5	221	Yes
16	5514	12	11.5	238	Yes
17	5506	14	15.4	247	Yes
18	5551	13	13.4	225	Yes
19	5637	14	15.7	361	Yes
20	5493	13	13.2	275	Yes
21	5601	15	16.7	306	Yes
22	5591	13	13.4	418	Yes
23	5497	12	11	327	Yes
24	5595	13	13.1	457	Yes
25	5629	16	19.6	328	Yes
26	5613	14	15.8	278	Yes
27	5575	13	12.8	366	No
28	5513	16	18.8	326	Yes
29	5648	12	11	380	Yes
30	5519	12	11.7	254	Yes
					Detection Rate: 90%

802.11be (EHT160) 5570MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5570	LP_SIGNAL_01	Yes
2	5	5570	LP_SIGNAL_02	Yes
3	9	5570	LP_SIGNAL_03	Yes
4	19	5570	LP_SIGNAL_04	Yes
5	16	5570	LP_SIGNAL_05	Yes
6	12	5570	LP_SIGNAL_06	Yes
7	13	5570	LP_SIGNAL_07	Yes
8	10	5570	LP_SIGNAL_08	Yes
9	13	5570	LP_SIGNAL_09	Yes
10	6	5570	LP_SIGNAL_10	Yes
11	16	5497.21	LP_SIGNAL_11	Yes
12	19	5498.41	LP_SIGNAL_12	Yes
13	13	5496.01	LP_SIGNAL_13	Yes
14	10	5494.81	LP_SIGNAL_14	Yes
15	18	5498.01	LP_SIGNAL_15	Yes
16	12	5495.61	LP_SIGNAL_16	Yes
17	20	5498.81	LP_SIGNAL_17	Yes
18	10	5494.81	LP_SIGNAL_18	Yes
19	12	5495.61	LP_SIGNAL_19	Yes
20	10	5494.81	LP_SIGNAL_20	Yes
21	15	5642.56	LP_SIGNAL_21	Yes
22	9	5644.96	LP_SIGNAL_22	Yes
23	20	5640.56	LP_SIGNAL_23	Yes
24	12	5643.76	LP_SIGNAL_24	Yes
25	11	5644.16	LP_SIGNAL_25	Yes
26	5	5646.56	LP_SIGNAL_26	Yes
27	16	5642.16	LP_SIGNAL_27	Yes
28	19	5640.96	LP_SIGNAL_28	Yes
29	10	5644.56	LP_SIGNAL_29	Yes
30	17	5641.76	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5570MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT240) 5610MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5490	22	1066.1	57	938	Yes
2	5569	10	1432.7	76	698	Yes
3	5492	6	1618.1	86	618	Yes
4	5519	2	1858.7	99	538	Yes
5	5578	19	1139	61	878	Yes
6	5580	23	326.2	18	3066	Yes
7	5658	7	1567.4	83	638	Yes
8	5656	21	1089.3	58	918	Yes
9	5498	17	1193.3	63	838	Yes
10	5494	18	1165.5	62	858	Yes
11	5699	15	1253.1	67	798	No
12	5493	11	1392.8	74	718	Yes
13	5650	4	1730.1	92	578	Yes
14	5637	5	1672.2	89	598	Yes
15	5724	3	1792.1	95	558	Yes
16	5678	-	394.3	21	2536	Yes
17	5662	-	1035.2	55	966	Yes
18	5507	-	1209.2	64	827	Yes
19	5562	-	399.8	22	2501	Yes
20	5509	-	385.4	21	2595	Yes
21	5491	-	897.7	48	1114	Yes
22	5511	-	768	41	1302	Yes
23	5572	-	328.4	18	3045	Yes
24	5573	-	615.8	33	1624	Yes
25	5645	-	347.5	19	2878	Yes
26	5515	-	973.7	52	1027	Yes
27	5516	-	402.4	22	2485	Yes
28	5722	-	625	33	1600	Yes
29	5495	-	853.2	46	1172	Yes
30	5527	-	849.6	45	1177	Yes
Detection Rate: 96.7%						

802.11be (EHT240) 5610MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5592	26	3.2	179	No
2	5542	23	1.1	207	Yes
3	5601	24	2.1	230	No
4	5498	29	4.8	200	Yes
5	5599	28	3.9	214	Yes
6	5495	26	2.9	222	Yes
7	5503	26	3.2	204	Yes
8	5547	25	2.5	192	Yes
9	5536	26	3.1	164	Yes
10	5633	23	1.2	156	Yes
11	5533	27	3.9	210	Yes
12	5526	29	4.6	201	Yes
13	5690	26	3.2	162	Yes
14	5595	25	2.2	197	Yes
15	5514	29	4.5	163	Yes
16	5505	26	3	203	Yes
17	5647	29	5	168	Yes
18	5679	25	2.4	217	Yes
19	5602	26	2.9	191	Yes
20	5531	25	2.3	166	Yes
21	5507	27	3.7	150	Yes
22	5710	25	2.2	176	Yes
23	5544	29	4.9	195	Yes
24	5552	26	2.9	202	Yes
25	5678	25	2.5	178	Yes
26	5630	23	1.1	206	Yes
27	5643	27	3.8	155	Yes
28	5597	29	4.7	157	Yes
29	5491	25	2.4	224	Yes
30	5556	28	4.2	159	Yes
Detection Rate: 93.3%					

802.11be (EHT240) 5610MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5611	17	8.2	355	Yes
2	5531	16	6.1	487	No
3	5713	16	7.1	344	Yes
4	5679	18	9.8	288	Yes
5	5576	18	8.9	230	Yes
6	5608	17	7.9	432	Yes
7	5556	17	8.2	207	Yes
8	5497	17	7.5	443	Yes
9	5525	17	8.1	439	Yes
10	5626	16	6.2	223	No
11	5492	18	8.9	208	Yes
12	5586	18	9.6	463	Yes
13	5572	17	8.2	441	No
14	5582	16	7.2	323	No
15	5569	18	9.5	297	Yes
16	5493	17	8	412	Yes
17	5575	18	10	324	Yes
18	5629	17	7.4	271	No
19	5595	17	7.9	349	Yes
20	5655	16	7.3	409	Yes
21	5706	18	8.7	373	Yes
22	5603	16	7.2	254	Yes
23	5670	18	9.9	274	Yes
24	5553	17	7.9	278	Yes
25	5514	17	7.5	317	Yes
26	5722	16	6.1	260	Yes
27	5682	18	8.8	211	Yes
28	5604	18	9.7	272	No
29	5637	17	7.4	264	Yes
30	5627	18	9.2	284	Yes
Detection Rate: 80%					

802.11be (EHT240) 5610MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5498	14	16	355	Yes
2	5572	12	11.3	487	Yes
3	5690	13	13.5	344	Yes
4	5583	16	19.4	288	Yes
5	5619	15	17.5	230	No
6	5660	14	15.3	432	Yes
7	5615	14	15.9	207	Yes
8	5661	13	14.3	443	No
9	5631	14	15.8	439	No
10	5516	12	11.5	223	Yes
11	5500	15	17.4	208	Yes
12	5526	16	19	463	Yes
13	5648	14	16	441	Yes
14	5603	13	13.8	323	Yes
15	5570	16	18.9	297	Yes
16	5670	14	15.5	412	No
17	5694	16	19.9	324	No
18	5521	13	14.1	271	Yes
19	5725	14	15.2	349	No
20	5546	13	13.8	409	Yes
21	5683	15	17.1	373	Yes
22	5506	13	13.8	254	Yes
23	5512	16	19.8	274	No
24	5531	14	15.3	278	Yes
25	5577	13	14.5	317	Yes
26	5700	12	11.3	260	Yes
27	5627	15	17.3	211	Yes
28	5718	16	19.2	272	Yes
29	5663	13	14.2	264	Yes
30	5533	15	18.2	284	Yes
Detection Rate: 76.7%					

802.11be (EHT240) 5610MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5610	LP_SIGNAL_01	Yes
2	5	5610	LP_SIGNAL_02	Yes
3	9	5610	LP_SIGNAL_03	Yes
4	19	5610	LP_SIGNAL_04	Yes
5	16	5610	LP_SIGNAL_05	No
6	12	5610	LP_SIGNAL_06	Yes
7	13	5610	LP_SIGNAL_07	Yes
8	10	5610	LP_SIGNAL_08	Yes
9	13	5610	LP_SIGNAL_09	Yes
10	6	5610	LP_SIGNAL_10	Yes
11	16	5496.61	LP_SIGNAL_11	Yes
12	19	5497.81	LP_SIGNAL_12	Yes
13	13	5495.41	LP_SIGNAL_13	Yes
14	10	5494.21	LP_SIGNAL_14	Yes
15	18	5497.41	LP_SIGNAL_15	Yes
16	12	5495.01	LP_SIGNAL_16	Yes
17	20	5498.21	LP_SIGNAL_17	Yes
18	10	5494.21	LP_SIGNAL_18	Yes
19	12	5495.01	LP_SIGNAL_19	Yes
20	10	5494.21	LP_SIGNAL_20	Yes
21	15	5718.24	LP_SIGNAL_21	Yes
22	9	5720.64	LP_SIGNAL_22	Yes
23	20	5716.24	LP_SIGNAL_23	Yes
24	12	5719.44	LP_SIGNAL_24	Yes
25	11	5719.84	LP_SIGNAL_25	Yes
26	5	5722.24	LP_SIGNAL_26	Yes
27	16	5717.84	LP_SIGNAL_27	Yes
28	19	5716.64	LP_SIGNAL_28	Yes
29	10	5720.24	LP_SIGNAL_29	Yes
30	17	5717.44	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT240) 5610MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%


7.6 Non-Associated Test

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih & Neil Yeh

External

Client without radar detection


Master was off.
During the 10 minutes observation time, The EUT did not make any transmissions in the DFS band after EUT power-up.

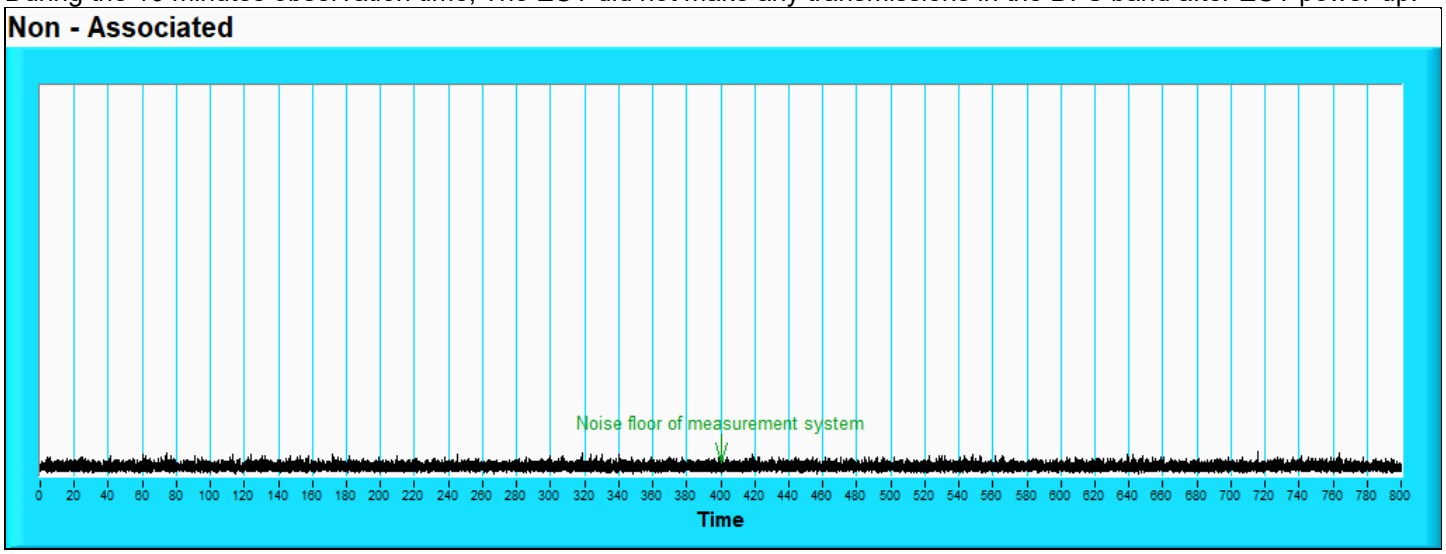

Internal

Client without radar detection

Master was off.
During the 10 minutes observation time, The EUT did not make any transmissions in the DFS band after EUT power-up.

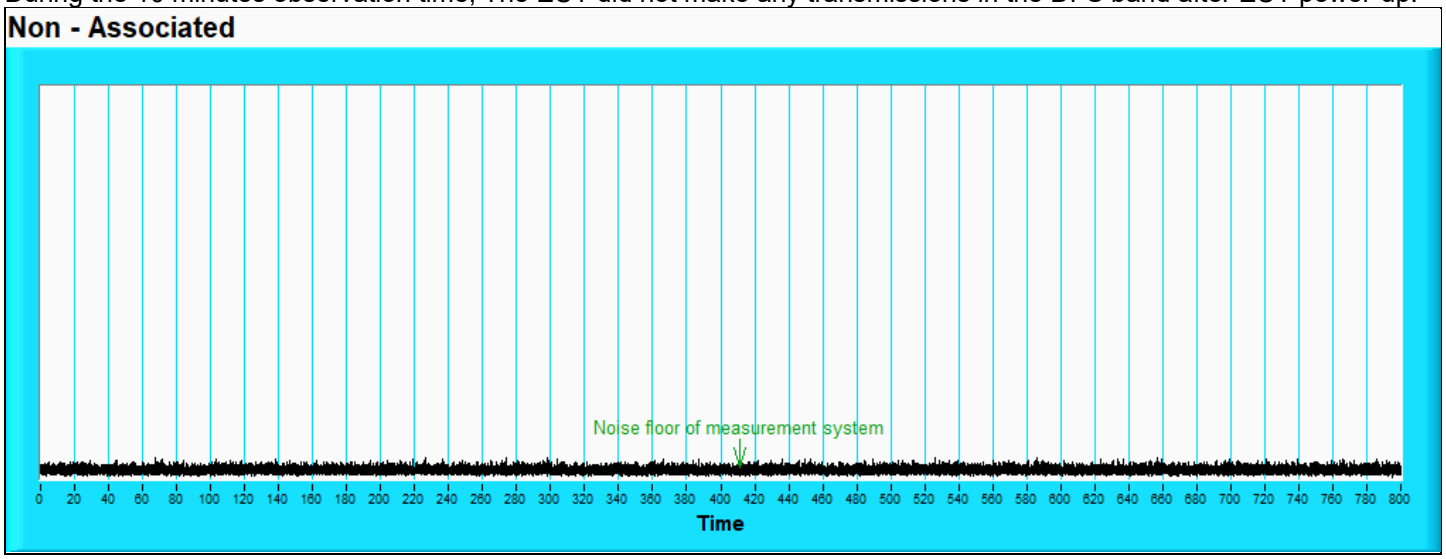

8 Declaration of Conformity by the Manufacturer

8.1 Transmit Power Control (TPC)

U-NII devices operating in DFS Bands (5.25 to 5.35 GHz and 5.47 to 5.725 GHz) shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

The maximum EIRP of this device is 934.58 mW, and it has TPC functionality.
The UUT can adjust a transmitter’s output power according to the device's Transmit Power Control (TPC) triggering mechanism. The TPC is controlled by the operation mode declared by the manufacturer.

8.2 Statement of Manufacturer

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user. And the device doesn’t have ad-hoc mode on DFS frequency band.

9 Pictures of Test Arrangements

Please refer to the attached file (DFS Test Setup Photo)

10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab
Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab
Tel: 886-(0)3-6668565 (SIP)
Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety Lab & Wenming EMC/RF Lab
Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com
Web Site: http://ee.bureauveritas.com.tw

The address and road map of all our labs can be found in our web site also.

11 Appendix

External

Master

11.1 Radar Test Signal

The Long Pulse Radar Pattern

802.11be (EHT20) 5500MHz

Long Pulse Radar Test Signal Test Signal Name: LP_SIGNAL_01 Number of Bursts in Trial: 15 Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal Test Signal Name: LP_SIGNAL_02 Number of Bursts in Trial: 8 Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 20
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 15
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 12
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 14
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 8
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5496.91MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.11MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5495.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 19
Chirp Center Frequency: 5497.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.31MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.31MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 16
Chirp Center Frequency: 5503.48MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 12
Chirp Center Frequency: 5505.88MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 20
Chirp Center Frequency: 5501.48MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5504.68MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5505.08MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 8
Chirp Center Frequency: 5507.48MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 17
Chirp Center Frequency: 5503.08MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5501.88MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5505.48MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 18
Chirp Center Frequency: 5502.68MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT40) 5510MHz

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_01
Number of Bursts in Trial: 20
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	98.3	1363	1175	1527
2	1	20	59.5	1786	-	-
3	1	20	64.6	2000	-	-
4	3	20	87.3	1312	1041	1935
5	2	20	82	1790	1873	-
6	3	20	99.5	1768	1370	1100
7	3	20	97.9	1431	1013	1690
8	1	20	51.9	1719	-	-
9	1	20	52.8	1394	-	-
10	3	20	93.1	1454	1906	1783
11	3	20	99.9	1002	1654	1914
12	3	20	99.6	1070	1609	1037
13	2	20	67.7	1851	1766	-
14	3	20	89	1710	1913	1366
15	1	20	62.9	1371	-	-
16	3	20	94.3	1890	1996	1440
17	1	20	50.6	1874	-	-
18	2	20	67.9	1610	1307	-
19	2	20	77.4	1967	1764	-
20	2	20	76.5	1108	1613	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_02
Number of Bursts in Trial: 10
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	8	70.9	1573	1940	-
2	2	8	69.8	1817	1713	-
3	1	8	62.6	1466	-	-
4	1	8	51.8	1676	-	-
5	1	8	50.5	1281	-	-
6	3	8	97.7	1470	1054	1335
7	3	8	97.4	1361	1776	1615
8	2	8	66.8	1716	1645	-
9	3	8	90.6	1275	1192	1422
10	2	8	78.1	1333	1962	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	76.4	1402	1465	-
2	2	9	79	1437	1828	-
3	2	9	82.9	1924	1098	-
4	2	9	79.9	1147	1272	-
5	1	9	61.9	1803	-	-
6	3	9	97.2	1799	1554	1752
7	3	9	93.4	1671	1222	1391
8	2	9	68.5	1300	1034	-
9	1	9	57.7	1632	-	-
10	1	9	54.1	1898	-	-
11	2	9	80.1	1570	1555	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 17
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	87	1888	1666	1153
2	2	16	70.4	1411	1218	-
3	2	16	66.7	1032	1026	-
4	2	16	77.1	1342	1374	-
5	3	16	100	1401	1211	1574
6	2	16	67.1	1728	1380	-
7	3	16	96.7	1887	1544	1831
8	2	16	79	1497	1576	-
9	2	16	71.1	1115	1316	-
10	1	16	60.8	1813	-	-
11	2	16	75.3	1979	1314	-
12	1	16	62	1966	-	-
13	3	16	86.4	1976	1053	1375
14	1	16	58.9	1299	-	-
15	2	16	78.4	1330	1506	-
16	3	16	96.9	1684	1912	1804
17	1	16	62.8	1162	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 16
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	86.8	1022	1689	1821
2	3	15	84.3	1419	1932	1429
3	1	15	52.1	1651	-	-
4	2	15	81.1	1343	1945	-
5	1	15	61.4	1095	-	-
6	2	15	74.8	1009	1458	-
7	2	15	66.7	1388	1575	-
8	2	15	70.8	1455	1492	-
9	1	15	66.6	1075	-	-
10	3	15	87.9	1942	1092	1700
11	2	15	77	1244	1981	-
12	1	15	65.8	1974	-	-
13	1	15	50.8	1220	-	-
14	2	15	82.1	1071	1707	-
15	1	15	60.1	1892	-	-
16	2	15	73.2	1818	1978	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 20
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	96.5	1522	1142	1931
2	3	20	84	1461	1951	1386
3	3	20	99.5	1384	1581	1973
4	3	20	96	1535	1031	1550
5	2	20	74.7	1619	1094	-
6	1	20	50.5	1195	-	-
7	2	20	80.6	1184	1229	-
8	1	20	50.7	1673	-	-
9	3	20	87.8	1729	1475	1183
10	2	20	69.4	1242	1577	-
11	2	20	67.2	1136	1447	-
12	1	20	51	1965	-	-
13	2	20	67	1607	1580	-
14	3	20	96.5	1638	1541	1266
15	2	20	70.9	1489	1459	-
16	3	20	83.5	1114	1759	1106
17	1	20	50.2	1946	-	-
18	2	20	80.6	1121	1165	-
19	2	20	81.8	1213	1021	-
20	2	20	73.4	1677	1856	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 20
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52	1983	-	-
2	3	20	99.1	1878	1916	1398
3	2	20	75.6	1355	1503	-
4	3	20	95.6	1592	1902	1354
5	3	20	100	1578	1504	1779
6	1	20	56.2	1254	-	-
7	3	20	83.4	1947	1020	1383
8	2	20	79.3	1780	1738	-
9	2	20	69.6	1725	1820	-
10	1	20	63.2	1785	-	-
11	2	20	70.3	1367	1062	-
12	2	20	78.7	1617	1368	-
13	1	20	65.1	1772	-	-
14	3	20	88.8	1362	1879	1704
15	3	20	90	1880	1235	1164
16	2	20	75	1533	1899	-
17	2	20	79	1669	1358	-
18	1	20	50.9	1791	-	-
19	3	20	88.1	1255	1685	1167
20	3	20	86.3	1107	1788	1171

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 8
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.7	1309	-	-
2	1	5	51.3	1076	-	-
3	3	5	93.3	1910	1726	1203
4	3	5	92.1	1393	1706	1191
5	1	5	57.5	1833	-	-
6	1	5	65.7	1572	-	-
7	1	5	53.7	1530	-	-
8	2	5	70.1	1825	1992	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 8
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	66.9	1210	1987	-
2	3	5	93.6	1552	1473	1116
3	1	5	65.5	1742	-	-
4	2	5	70.3	1486	1364	-
5	1	5	50.3	1633	-	-
6	3	5	86.8	1135	1871	1260
7	2	5	71.2	1529	1159	-
8	3	5	97.5	1308	1292	1891

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 19
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	58.3	1564	-	-
2	1	18	53.8	1657	-	-
3	3	18	96.1	1847	1397	1369
4	2	18	68.4	1097	1523	-
5	2	18	67.2	1014	1810	-
6	1	18	51.2	1315	-	-
7	2	18	81.1	1055	1640	-
8	2	18	74.6	1295	1421	-
9	3	18	99.1	1240	1762	1425
10	3	18	88.5	1698	1956	1129
11	3	18	85.9	1937	1872	1678
12	2	18	78.3	1732	1990	-
13	1	18	56.5	1520	-	-
14	3	18	96	1189	1345	1117
15	1	18	54.5	1518	-	-
16	3	18	99.3	1955	1949	1017
17	3	18	92.5	1857	1452	1214
18	3	18	95.6	1104	1670	1999
19	2	18	69.7	1837	1988	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	50.6	1968	-	-
2	1	20	55.7	1961	-	-
3	3	20	83.6	1893	1521	1433
4	3	20	88	1663	1695	1537
5	3	20	84.2	1822	1253	1881
6	1	20	52.4	1120	-	-
7	1	20	63.2	1123	-	-
8	1	20	62.4	1280	-	-
9	2	20	76.1	1681	1099	-
10	3	20	97.8	1679	1040	1562
11	1	20	50	1267	-	-
12	2	20	78.4	1174	1925	-
13	2	20	78.4	1027	1148	-
14	2	20	67.5	1439	1329	-
15	3	20	92.6	1561	1298	1077
16	1	20	66.6	1087	-	-
17	2	20	75.1	1085	1296	-
18	1	20	54.9	1324	-	-
19	2	20	69.6	1885	1963	-
20	2	20	69.1	1478	1144	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.4	1124	-	-
2	2	20	70.3	1781	1263	-
3	2	20	68.7	1516	1941	-
4	3	20	93	1045	1844	1328
5	2	20	69.1	1166	1921	-
6	2	20	79.9	1389	1636	-
7	2	20	75.5	1177	1740	-
8	1	20	63.6	1665	-	-
9	2	20	70.9	1686	1986	-
10	3	20	89.1	1357	1047	1332
11	1	20	66.2	1337	-	-
12	2	20	77.8	1283	1801	-
13	1	20	54.8	1501	-	-
14	2	20	67	1138	1132	-
15	2	20	70.6	1066	1028	-
16	3	20	91.7	1216	1805	1658
17	2	20	74.8	1249	1566	-
18	1	20	65.8	1336	-	-
19	1	20	61.8	1378	-	-
20	1	20	65.9	1660	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	53.9	1525	-	-
2	3	10	88.9	1897	1832	1957
3	1	10	54.9	1176	-	-
4	2	10	76.8	1048	1789	-
5	3	10	99.1	1702	1435	1420
6	1	10	60.1	1757	-	-
7	1	10	57.4	1111	-	-
8	1	10	60.7	1137	-	-
9	1	10	64	1557	-	-
10	2	10	79.4	1524	1746	-
11	2	10	79.4	1883	1954	-
12	3	10	94.4	1850	1051	1024

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 18
Chirp Center Frequency: 5497.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	17	72.8	1730	1200	-
2	2	17	76.4	1237	1236	-
3	2	17	67.2	1326	1105	-
4	2	17	80.4	1493	1680	-
5	3	17	87.1	1472	1599	1133
6	3	17	90.6	1491	1682	1494
7	2	17	68.9	1179	1711	-
8	1	17	54.3	1614	-	-
9	2	17	77	1404	1202	-
10	3	17	99.7	1033	1477	1418
11	3	17	91.5	1250	1016	1512
12	3	17	87.1	1761	1579	1128
13	2	17	81.5	1064	1428	-
14	2	17	72.2	1274	1042	-
15	2	17	73.5	1559	1597	-
16	1	17	61.4	1019	-	-
17	3	17	97	1134	1086	1546
18	1	17	50.8	1443	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 11
Chirp Center Frequency: 5494.45MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	9	91.8	1500	1627	1793
2	1	9	59.2	1227	-	-
3	3	9	93.2	1618	1970	1288
4	1	9	53.6	1193	-	-
5	1	9	65.1	1130	-	-
6	1	9	63.6	1920	-	-
7	1	9	65.3	1587	-	-
8	3	9	91.9	1344	1446	1445
9	3	9	94	1687	1773	1800
10	1	9	58.9	1991	-	-
11	2	9	72.4	1450	1630	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.45MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	64.8	1318	-	-
2	3	19	99.6	1232	1453	1943
3	3	19	91.6	1958	1302	1869
4	1	19	59.6	1078	-	-
5	2	19	71.9	1499	1392	-
6	1	19	54.9	1245	-	-
7	2	19	78.4	1998	1181	-
8	3	19	99.8	1722	1542	1485
9	3	19	90.2	1152	1150	1356
10	1	19	54.5	1723	-	-
11	3	19	84.3	1622	1442	1217
12	3	19	97	1731	1727	1471
13	1	19	57.4	1933	-	-
14	3	19	89	1082	1620	1043
15	1	19	54.3	1387	-	-
16	3	19	97.5	1221	1044	1602
17	2	19	67.8	1901	1056	-
18	3	19	95.4	1583	1629	1807
19	2	19	76.8	1515	1291	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 8
Chirp Center Frequency: 5492.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	86.6	1269	1340	1824
2	3	5	96.1	1414	1672	1079
3	1	5	63.7	1745	-	-
4	1	5	63.1	1754	-	-
5	3	5	87.6	1349	1938	1625
6	2	5	70.1	1011	1868	-
7	1	5	51.2	1436	-	-
8	2	5	69.1	1894	1709	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	61.3	1964	-	-
2	1	10	53.6	1001	-	-
3	1	10	65	1688	-	-
4	3	10	95.3	1507	1081	1278
5	3	10	96.7	1372	1763	1718
6	1	10	60	1734	-	-
7	2	10	82	1173	1519	-
8	1	10	62.1	1319	-	-
9	1	10	50	1845	-	-
10	3	10	99.9	1265	1023	1909
11	2	10	77.4	1449	1748	-
12	1	10	59.6	1438	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 15
Chirp Center Frequency: 5496.05MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	67.3	1072	1635	-
2	3	13	95.2	1029	1612	1297
3	1	13	61.6	1127	-	-
4	1	13	56.7	1712	-	-
5	3	13	96.4	1532	1008	1390
6	1	13	57.5	1860	-	-
7	1	13	62.3	1918	-	-
8	3	13	85.7	1797	1594	1463
9	1	13	64.7	1286	-	-
10	1	13	60.7	1276	-	-
11	1	13	66.1	1626	-	-
12	3	13	97.5	1325	1646	1705
13	3	13	96.6	1259	1464	1548
14	2	13	67.1	1170	1591	-
15	2	13	72.3	1826	1084	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 14
Chirp Center Frequency: 5496.05MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	76.3	1641	1915	-
2	1	13	51	1739	-	-
3	3	13	86.5	1827	1247	1424
4	1	13	54	2000	-	-
5	3	13	89.6	1018	1505	1400
6	2	13	70.6	1410	1782	-
7	3	13	85.8	1691	1010	1350
8	2	13	67	1293	1714	-
9	3	13	96.2	1282	1268	1261
10	2	13	75.2	1270	1279	-
11	1	13	59.3	1444	-	-
12	3	13	87.6	1834	1648	1884
13	3	13	86.9	1624	1403	1895
14	2	13	75.5	1432	1536	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 13
Chirp Center Frequency: 5524.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	76.8	1551	1408	-
2	1	11	54.3	1994	-	-
3	3	11	97.7	1510	1172	1154
4	3	11	90.5	1528	1118	1395
5	3	11	85.7	1413	1030	1929
6	1	11	59.5	1311	-	-
7	3	11	91.5	1642	1838	1126
8	3	11	84.5	1939	1406	1634
9	1	11	57	1696	-	-
10	2	11	66.7	1692	1877	-
11	2	11	80	1724	1377	-
12	1	11	57.7	1683	-	-
13	1	11	65.6	1637	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 13
Chirp Center Frequency: 5524.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	11	54.4	1774	-	-
2	1	11	50.6	1674	-	-
3	3	11	87.5	1735	1598	1199
4	2	11	67.6	1508	1875	-
5	3	11	98.8	1317	1405	1305
6	2	11	79.5	1385	1852	-
7	3	11	87.7	1187	1212	1568
8	1	11	55.6	1795	-	-
9	1	11	61.1	1545	-	-
10	1	11	63.5	1457	-	-
11	3	11	95.8	1341	1239	1460
12	3	11	87.9	1224	1841	1206
13	3	11	89	1151	1984	1110

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 11
Chirp Center Frequency: 5525.42MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	81.5	1025	1993	-
2	2	9	78.1	1156	1659	-
3	1	9	65.5	1534	-	-
4	2	9	81.6	1251	1777	-
5	3	9	87.1	1653	1652	1264
6	2	9	69.9	1644	1209	-
7	2	9	75.4	1331	1376	-
8	1	9	60.1	1119	-	-
9	3	9	87.9	1223	1208	1989
10	1	9	56.4	1778	-	-
11	2	9	68.5	1960	1157	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 8
Chirp Center Frequency: 5527.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	57	1631	-	-
2	1	5	60.8	1934	-	-
3	1	5	57.6	1015	-	-
4	2	5	80.8	1141	1926	-
5	3	5	91.9	1905	1476	1715
6	3	5	94.1	1863	1407	1069
7	2	5	69.7	1751	1708	-
8	2	5	74	1238	1417	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 8
Chirp Center Frequency: 5527.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	81.8	1182	1180	-
2	1	5	55	1498	-	-
3	2	5	81.4	1549	1373	-
4	1	5	66.4	1605	-	-
5	1	5	58.6	1862	-	-
6	1	5	57.5	1853	-	-
7	1	5	60.6	1113	-	-
8	1	5	58.1	1303	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5521.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	99.3	1359	1241	1416
2	2	20	69.9	1560	1131	-
3	1	20	65.7	1571	-	-
4	3	20	90.8	1257	1770	1262
5	1	20	51.8	1065	-	-
6	1	20	52.5	1145	-	-
7	3	20	96.7	1753	1802	1103
8	2	20	78	1196	1830	-
9	1	20	63.4	1228	-	-
10	2	20	69	1067	1083	-
11	2	20	75.4	1621	1462	-
12	2	20	79.7	1864	1277	-
13	1	20	60.1	1840	-	-
14	2	20	82.4	1538	1301	-
15	1	20	55.4	1900	-	-
16	1	20	66.6	1089	-	-
17	3	20	94.2	1936	1509	1870
18	2	20	69	1650	1080	-
19	1	20	60.5	1959	-	-
20	3	20	87.9	1814	1347	1643

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 20
Chirp Center Frequency: 5521.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	71.8	1944	1474	-
2	1	20	56.9	1743	-	-
3	1	20	63.8	1323	-	-
4	2	20	67.1	1007	1158	-
5	3	20	93.8	1426	1327	1858
6	2	20	71.8	1381	1057	-
7	1	20	56	1233	-	-
8	3	20	84	1093	1035	1589
9	1	20	50.1	1285	-	-
10	1	20	61.6	1668	-	-
11	1	20	56.8	1849	-	-
12	2	20	74	1060	1441	-
13	2	20	76.5	1796	1352	-
14	1	20	61.8	1866	-	-
15	2	20	76.2	1353	1225	-
16	3	20	90.2	1271	1758	1886
17	2	20	72.1	1611	1596	-
18	1	20	65.6	1219	-	-
19	2	20	66.7	1168	1109	-
20	1	20	54.4	1379	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 12
Chirp Center Frequency: 5525.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	64.1	1930	-	-
2	2	10	79.7	1972	1068	-
3	2	10	67.3	1737	1794	-
4	2	10	72.9	1865	1396	-
5	2	10	68.6	1052	1809	-
6	3	10	90.1	1747	1903	1558
7	1	10	63.9	1188	-	-
8	3	10	99.5	1346	1842	1360
9	3	10	99.7	1907	1482	1531
10	1	10	64.7	1846	-	-
11	2	10	72.2	1760	1819	-
12	3	10	89.7	1348	1876	1787

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 18
Chirp Center Frequency: 5522.22MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	97	1664	1675	1038
2	2	17	72.7	1484	1543	-
3	3	17	86.3	1526	1904	1950
4	3	17	92.3	1290	1046	1468
5	1	17	56.1	1582	-	-
6	3	17	98.7	1661	1451	1201
7	3	17	97.1	1488	1513	1699
8	2	17	80	1125	1639	-
9	3	17	96.5	1289	1601	1169
10	1	17	62.7	1567	-	-
11	2	17	77.9	1412	1480	-
12	1	17	51.8	1806	-	-
13	1	17	62.1	1197	-	-
14	1	17	51.3	1815	-	-
15	1	17	53.2	1928	-	-
16	3	17	98.3	1588	1036	1769
17	1	17	56.1	1096	-	-
18	1	17	65.2	1953	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 15
Chirp Center Frequency: 5523.82MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	94.5	1908	1178	1339
2	2	13	78.6	1122	1556	-
3	1	13	52.2	1854	-	-
4	1	13	56	1600	-	-
5	2	13	73.8	1927	1481	-
6	3	13	92.2	1490	1771	1736
7	3	13	89.6	1593	1767	1313
8	3	13	91	1517	1146	1569
9	3	13	98.5	1059	1284	1246
10	1	13	53.7	1496	-	-
11	1	13	57.9	1585	-	-
12	1	13	56.6	1198	-	-
13	3	13	84.3	1049	1061	1656
14	3	13	85.4	1005	1540	1479
15	3	13	89.4	1139	1252	1756

802.11be (EHT80) 5530MHz

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_01
Number of Bursts in Trial: 9
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	53.9	1843	-	-
2	2	6	76.9	1553	1668	-
3	3	6	85.7	1090	1717	1602
4	1	6	62.1	1495	-	-
5	2	6	81.9	1856	1815	-
6	2	6	78.3	1325	1383	-
7	3	6	98.7	1569	1823	1570
8	1	6	54.2	1450	-	-
9	3	6	98.7	1560	1972	1336

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_02
Number of Bursts in Trial: 15
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	78.7	1001	1526	-
2	2	13	71.4	1208	1707	-
3	3	13	99.3	1331	1434	1691
4	2	13	78.4	1786	1438	-
5	3	13	92.2	1837	1023	1384
6	1	13	62.1	1910	-	-
7	2	13	82.7	1539	1589	-
8	2	13	72.3	1727	1656	-
9	2	13	69	1494	1098	-
10	1	13	54.1	1231	-	-
11	2	13	68	1518	1253	-
12	3	13	97.5	1146	1004	1945
13	2	13	80.6	1523	1806	-
14	1	13	53.8	1401	-	-
15	3	13	96.6	1690	1379	1238

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 17
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	90.5	1814	1531	1644
2	2	16	77.4	1883	1410	-
3	1	16	58.7	1277	-	-
4	1	16	52.9	1389	-	-
5	2	16	67.8	1222	1487	-
6	3	16	98.8	1654	1933	1164
7	1	16	65.3	1660	-	-
8	2	16	67.1	1084	1684	-
9	1	16	65.9	1417	-	-
10	1	16	56.2	1846	-	-
11	3	16	99.4	1982	1096	1167
12	1	16	55.6	1958	-	-
13	2	16	82.1	1462	1994	-
14	3	16	95.6	1820	1380	1204
15	2	16	66.8	1764	1061	-
16	3	16	98.8	1630	1290	1349
17	1	16	62.1	1312	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 11
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	8	95.3	1852	1464	1855
2	1	8	63.6	1519	-	-
3	2	8	79.7	1911	1179	-
4	1	8	64.1	1703	-	-
5	2	8	80.1	1267	1525	-
6	2	8	79.8	1866	1579	-
7	2	8	81.3	1587	1089	-
8	1	8	65	1741	-	-
9	2	8	74.8	1922	1514	-
10	3	8	97	1106	1962	1674
11	3	8	99.6	1594	1465	1282

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 16
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	86.4	1352	1826	1882
2	1	15	64.3	1030	-	-
3	1	15	57	1073	-	-
4	2	15	73.4	1627	1414	-
5	2	15	73.1	1859	1364	-
6	3	15	89.2	1105	1810	1875
7	2	15	71.6	1831	1151	-
8	1	15	54.4	1188	-	-
9	2	15	69.6	1803	1648	-
10	3	15	95.8	1902	1686	1851
11	3	15	86.5	1415	1486	1165
12	3	15	99.9	1894	1537	1250
13	1	15	63.4	1957	-	-
14	1	15	54.3	1670	-	-
15	2	15	83.3	1871	1757	-
16	2	15	72.1	1100	1112	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 15
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	14	92.9	1948	1402	1642
2	1	14	56.5	1007	-	-
3	1	14	50.5	1215	-	-
4	2	14	76.7	1752	1237	-
5	1	14	52.2	1300	-	-
6	1	14	55.4	1938	-	-
7	1	14	55.8	1025	-	-
8	1	14	52.2	1873	-	-
9	2	14	66.9	1199	1565	-
10	2	14	74.2	1503	1124	-
11	2	14	82.4	1340	1391	-
12	1	14	60.4	1791	-	-
13	3	14	97.7	1377	1459	1442
14	2	14	77.4	1748	1333	-
15	3	14	87.9	1005	1493	1763

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 20
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.1	1262	1205	1159
2	1	20	51.8	1271	-	-
3	1	20	65.7	1513	-	-
4	2	20	80.8	1575	1095	-
5	1	20	51.6	1453	-	-
6	3	20	99.3	1736	1181	1963
7	2	20	76	1567	1000	-
8	2	20	82.6	1898	1251	-
9	3	20	93	1558	1974	1611
10	2	20	74	1445	1608	-
11	1	20	62.3	1011	-	-
12	2	20	79.1	1841	1265	-
13	1	20	66.4	1158	-	-
14	1	20	58.8	1722	-	-
15	1	20	63.8	1672	-	-
16	1	20	66.3	1232	-	-
17	1	20	59.8	1693	-	-
18	3	20	96.8	1792	1929	1256
19	1	20	57.7	1868	-	-
20	3	20	88.5	1472	1930	1305

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 9
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	58.5	1529	-	-
2	2	6	74.2	1661	1926	-
3	2	6	70.3	1789	1683	-
4	3	6	97.4	1807	1063	1799
5	2	6	80.9	1750	1777	-
6	1	6	58.5	1723	-	-
7	1	6	54.8	1774	-	-
8	1	6	56.4	1152	-	-
9	3	6	99	1819	1599	1847

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 20
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	56.7	1643	-	-
2	1	20	61.2	1685	-	-
3	1	20	56.8	1248	-	-
4	3	20	92.3	1530	1733	1317
5	1	20	57.9	1951	-	-
6	3	20	93.4	1270	1700	1893
7	3	20	98.1	1999	1781	1485
8	3	20	97.7	1203	1002	1780
9	2	20	73.6	1583	1287	-
10	2	20	81.7	1202	1701	-
11	2	20	72.8	1021	1225	-
12	2	20	66.9	1897	1172	-
13	2	20	74	1640	1110	-
14	1	20	57.5	1659	-	-
15	1	20	52.7	1274	-	-
16	3	20	89.9	1498	1310	1131
17	2	20	76.4	1193	1795	-
18	3	20	89.4	1840	1413	1360
19	3	20	93.4	1425	1715	1769
20	1	20	53.1	1971	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 15
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	57.8	1147	-	-
2	2	14	72.6	1491	1329	-
3	1	14	63.6	1298	-	-
4	3	14	89.9	1850	1320	1313
5	3	14	88.9	1651	1046	1509
6	2	14	79.4	1508	1422	-
7	2	14	68.8	1440	1351	-
8	2	14	81.6	1060	1034	-
9	2	14	68.4	1009	1952	-
10	3	14	99.9	1385	1428	1586
11	3	14	93.2	1581	1209	1942
12	3	14	94.5	1423	1988	1507
13	2	14	69.6	1273	1845	-
14	3	14	83.6	1062	1207	1771
15	3	14	86.3	1264	1143	1624

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 13
Chirp Center Frequency: 5495.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	11	62.7	1940	-	-
2	1	11	55.5	1373	-	-
3	3	11	86.9	1400	1628	1019
4	1	11	58.5	1015	-	-
5	1	11	65.4	1316	-	-
6	1	11	65.8	1745	-	-
7	2	11	68.7	1879	1641	-
8	3	11	86.3	1724	1016	1236
9	1	11	65.1	1255	-	-
10	3	11	84.9	1252	1761	1371
11	2	11	71.6	1804	1285	-
12	3	11	84.5	1696	1896	1838
13	1	11	66.6	1542	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 20
Chirp Center Frequency: 5499.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	67.5	1361	1749	-
2	1	20	57.5	1490	-	-
3	1	20	54.5	1210	-	-
4	2	20	69.1	1353	1065	-
5	1	20	61.4	1829	-	-
6	1	20	53.2	1631	-	-
7	3	20	91.1	1909	1622	1688
8	3	20	84.1	1556	1931	1350
9	3	20	97.6	1732	1049	1176
10	2	20	67	1805	1784	-
11	1	20	53.3	1844	-	-
12	2	20	78.5	1878	1941	-
13	2	20	74.6	1408	1559	-
14	1	20	66.4	1108	-	-
15	2	20	79.2	1228	1808	-
16	2	20	73.7	1918	1040	-
17	3	20	88.5	1334	1137	1309
18	2	20	78.4	1058	1953	-
19	3	20	97.4	1219	1263	1540
20	3	20	90.4	1905	1304	1891

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5496.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	14	71.3	1768	1620	-
2	3	14	90	1991	1097	1031
3	3	14	84.3	1114	1013	1276
4	3	14	89.5	1148	1625	1042
5	2	14	80.9	1242	1234	-
6	2	14	78	1032	1076	-
7	3	14	87.4	1489	1121	1979
8	3	14	89.2	1411	1221	1357
9	3	14	86.4	1614	1239	1964
10	3	14	98.5	1120	1045	1220
11	1	14	55	1033	-	-
12	2	14	67.3	1163	1430	-
13	3	14	94.9	1180	1824	1047
14	1	14	52.2	1900	-	-
15	1	14	64	1460	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 18
Chirp Center Frequency: 5498.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.9	1418	-	-
2	3	18	95.4	1895	1330	1793
3	2	18	74	1754	1323	-
4	2	18	83.1	1444	1506	-
5	1	18	66.3	1877	-	-
6	3	18	92.6	1839	1544	1751
7	1	18	52.1	1816	-	-
8	1	18	65.1	1917	-	-
9	3	18	88.5	1241	1758	1315
10	3	18	83.5	1623	1969	1538
11	2	18	80	1224	1580	-
12	3	18	90.9	1725	1658	1372
13	3	18	99.4	1269	1564	1973
14	3	18	89.5	1314	1916	1711
15	1	18	62.5	1573	-	-
16	2	18	76.7	1574	1731	-
17	1	18	56.5	1716	-	-
18	2	18	74.2	1469	1734	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 11
Chirp Center Frequency: 5494.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	8	94.2	1861	1662	1550
2	3	8	95.3	1367	1244	1093
3	2	8	77.6	1697	1578	-
4	2	8	73.2	1038	1704	-
5	1	8	65	1908	-	-
6	3	8	88.3	1070	1610	1981
7	3	8	83.4	1864	1788	1286
8	1	8	65.9	1053	-	-
9	1	8	51.8	1322	-	-
10	3	8	97.8	1129	1949	1618
11	3	8	99.2	1141	1996	1997

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 16
Chirp Center Frequency: 5497.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	15	62	1880	-	-
2	3	15	86	1133	1136	1399
3	3	15	83.6	1196	1600	1201
4	2	15	72.3	1484	1054	-
5	1	15	52.4	1778	-	-
6	2	15	68.2	1258	1052	-
7	2	15	78.3	1431	1397	-
8	1	15	64.4	1961	-	-
9	3	15	95.3	1454	1676	1616
10	2	15	81.1	1471	1192	-
11	3	15	97.8	1767	1652	1461
12	2	15	69.2	1126	1742	-
13	2	15	74.9	1987	1407	-
14	3	15	95.9	1387	1737	1562
15	1	15	56	1102	-	-
16	1	15	50.8	1947	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 13
Chirp Center Frequency: 5496MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	87.2	1775	1637	1111
2	3	12	88.1	1985	1449	1326
3	3	12	99.7	1719	1666	1657
4	2	12	73.8	1406	1227	-
5	2	12	71.8	1800	1119	-
6	3	12	98.5	1521	1059	1257
7	3	12	93.2	1710	1099	1343
8	1	12	50.7	1629	-	-
9	1	12	56.9	1821	-	-
10	3	12	86.5	1606	1139	1884
11	3	12	87.8	1946	1477	1904
12	2	12	80.3	1566	1324	-
13	3	12	85.8	1156	1128	1582

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5495.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	99.7	1067	1134	1919
2	1	11	50.4	1022	-	-
3	3	11	90.8	1026	1044	1500
4	1	11	54.3	1740	-	-
5	1	11	66	1639	-	-
6	2	11	76.5	1341	1726	-
7	3	11	97.5	1072	1832	1812
8	3	11	96.4	1346	1718	1050
9	2	11	68.5	1813	1480	-
10	3	11	96.9	1153	1008	1451
11	2	11	71.2	1439	1378	-
12	3	11	84.2	1977	1729	1532

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 9
Chirp Center Frequency: 5493.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	62.2	1479	-	-
2	1	6	61.2	1597	-	-
3	3	6	93.2	1278	1944	1664
4	3	6	96.4	1598	1254	1229
5	2	6	76.1	1233	1113	-
6	1	6	52.7	1746	-	-
7	2	6	77.4	1568	1348	-
8	1	6	59	1223	-	-
9	3	6	87.4	1928	1937	1214

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 12
Chirp Center Frequency: 5495.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	96.3	1520	1936	1885
2	2	10	77.8	1082	1039	-
3	1	10	52.1	1184	-	-
4	2	10	74	1375	1753	-
5	2	10	77.3	1296	1321	-
6	1	10	63.5	1426	-	-
7	3	10	92.9	1029	1932	1194
8	2	10	82.9	1770	1335	-
9	1	10	65.4	1548	-	-
10	1	10	66	1901	-	-
11	2	10	80.5	1382	1915	-
12	3	10	98	1955	1980	1370

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 20
Chirp Center Frequency: 5560.68MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	78.6	1796	1593	-
2	3	20	95.7	1601	1198	1217
3	2	20	80.7	1051	1633	-
4	1	20	57	1609	-	-
5	1	20	64.8	1655	-	-
6	1	20	58.8	1511	-	-
7	2	20	69.3	1645	1869	-
8	1	20	58.5	1249	-	-
9	1	20	54.5	1621	-	-
10	2	20	68.6	1302	1416	-
11	3	20	91.2	1437	1394	1466
12	2	20	78.4	1603	1721	-
13	3	20	89.6	1496	1104	1347
14	1	20	59.6	1617	-	-
15	3	20	87.3	1966	1552	1970
16	3	20	100	1432	1366	1802
17	1	20	54.4	1470	-	-
18	2	20	80.9	1281	1420	-
19	3	20	83.8	1359	1327	1481
20	1	20	60.3	1457	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 15
Chirp Center Frequency: 5563.08MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	14	71.3	1017	1344	-
2	3	14	98.5	1037	1171	1355
3	1	14	53.4	1547	-	-
4	2	14	72.6	1197	1607	-
5	3	14	88.6	1794	1175	1892
6	2	14	80.4	1595	1694	-
7	3	14	88.7	1014	1773	1433
8	1	14	63	1499	-	-
9	1	14	54.5	1027	-	-
10	1	14	63.5	1405	-	-
11	1	14	53	1299	-	-
12	2	14	80.9	1056	1303	-
13	3	14	90.8	1743	1115	1517
14	3	14	86.3	1259	1649	1663
15	3	14	83.6	1533	1699	1332

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 9
Chirp Center Frequency: 5566.28MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	65.6	1886	-	-
2	1	6	62.5	1279	-	-
3	3	6	89.3	1140	1474	1283
4	1	6	61.2	1571	-	-
5	3	6	93.9	1081	1834	1240
6	1	6	58	1890	-	-
7	1	6	50.4	1702	-	-
8	2	6	82.9	1638	1635	-
9	2	6	77.6	1354	1669	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 20
Chirp Center Frequency: 5561.08MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	86.6	1543	1083	1888
2	2	19	73.8	1246	1342	-
3	3	19	84.4	1956	1920	1122
4	2	19	67.7	1376	1182	-
5	2	19	76.2	1925	1667	-
6	3	19	93	1291	1555	1189
7	2	19	78.4	1012	1546	-
8	3	19	84.6	1369	1132	1766
9	2	19	82.3	1943	1455	-
10	2	19	70.1	1160	1103	-
11	2	19	76.7	1458	1720	-
12	2	19	80.2	1363	1671	-
13	3	19	92.3	1673	1288	2000
14	1	19	58	1835	-	-
15	2	19	68.5	1572	1135	-
16	3	19	84.5	1091	1272	1035
17	2	19	70.2	1289	1028	-
18	1	19	56.2	1130	-	-
19	1	19	53.9	1881	-	-
20	3	19	91	1678	1782	1551

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 18
Chirp Center Frequency: 5561.88MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	17	65.6	1809	-	-
2	1	17	60.3	1435	-	-
3	3	17	87.7	1858	1446	1849
4	1	17	53.3	1116	-	-
5	2	17	76	1162	1924	-
6	2	17	71.7	1554	1790	-
7	3	17	87.4	1787	1306	1421
8	1	17	65.1	1677	-	-
9	2	17	69.6	1906	1862	-
10	3	17	90	1154	1107	1739
11	1	17	52.2	1535	-	-
12	2	17	70.9	1527	1109	-
13	1	17	65.6	1125	-	-
14	2	17	75.8	1830	1613	-
15	3	17	86	1825	1475	1284
16	1	17	64.8	1992	-	-
17	3	17	96	1993	1899	1396
18	2	17	70.9	1142	1381	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 15
Chirp Center Frequency: 5563.48MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	86.8	1168	1968	1297
2	1	13	61.6	1965	-	-
3	3	13	85.1	1604	1118	1057
4	2	13	68.5	1524	1266	-
5	3	13	98.7	1989	1218	1584
6	2	13	70.6	1939	1187	-
7	1	13	59.5	1967	-	-
8	1	13	53.3	1245	-	-
9	2	13	73.4	1356	1665	-
10	1	13	54.4	1216	-	-
11	2	13	70.8	1086	1647	-
12	2	13	76.8	1452	1169	-
13	2	13	73.6	1195	1502	-
14	1	13	51.8	1328	-	-
15	3	13	96.5	1374	1515	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 10
Chirp Center Frequency: 5565.88MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	7	91.9	1590	1612	1068
2	1	7	62	1687	-	-
3	2	7	76.3	1854	1822	-
4	3	7	86.1	1123	1488	1088
5	2	7	81.1	1619	1427	-
6	3	7	91.7	1268	1393	1907
7	1	7	54.5	1680	-	-
8	1	7	55.5	1041	-	-
9	1	7	63.3	1476	-	-
10	1	7	64.9	1145	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 8
Chirp Center Frequency: 5566.68MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.4	1735	1934	1679
2	2	5	67.9	1983	1776	-
3	1	5	55.7	1797	-	-
4	1	5	64.6	1561	-	-
5	1	5	66.4	1923	-	-
6	2	5	72.1	1585	1436	-
7	1	5	53.6	1211	-	-
8	3	5	88.5	1675	1653	1914

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5564.68MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	99.3	1995	1522	1150
2	2	10	69.4	1235	1185	-
3	3	10	92.4	1534	1018	1865
4	1	10	55.9	1785	-	-
5	3	10	97.1	1443	1681	1738
6	1	10	61.7	1921	-	-
7	2	10	67.1	1646	1412	-
8	3	10	93.8	1747	1339	1959
9	2	10	72.6	1863	1010	-
10	3	10	98.4	1020	1368	1473
11	2	10	82.9	1913	1505	-
12	3	10	94.4	1247	1392	1213

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 20
Chirp Center Frequency: 5560.68MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	92.9	1395	1069	1765
2	1	20	66.3	1848	-	-
3	1	20	50.4	1260	-	-
4	2	20	74.5	1085	1055	-
5	2	20	73.7	1177	1186	-
6	1	20	63.7	1448	-	-
7	1	20	59.7	1409	-	-
8	2	20	78.8	1978	1230	-
9	1	20	64.9	1087	-	-
10	2	20	79.2	1650	1730	-
11	2	20	82.3	1077	1456	-
12	1	20	56.1	1003	-	-
13	2	20	71.8	1155	1759	-
14	1	20	53.5	1950	-	-
15	1	20	56.3	1292	-	-
16	1	20	52.7	1074	-	-
17	1	20	53.8	1483	-	-
18	3	20	88.8	1036	1817	1467
19	1	20	56.9	1386	-	-
20	2	20	82.4	1762	1173	-

802.11be (EHT160) 5250MHz

Long Pulse Radar Test Signal Test Signal Name: LP_SIGNAL_01 Number of Bursts in Trial: 15 Chirp Center Frequency: 5290MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal Test Signal Name: LP_SIGNAL_02 Number of Bursts in Trial: 8 Chirp Center Frequency: 5290MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 20
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 15
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 12
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 14
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 8
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5256.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 19
Chirp Center Frequency: 5257.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5255.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 12
Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 19
Chirp Center Frequency: 5257.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5254.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 14
Chirp Center Frequency: 5254.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 12
Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 16
Chirp Center Frequency: 5321.84MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 12
Chirp Center Frequency: 5324.24MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 20
Chirp Center Frequency: 5319.84MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5323.04MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5323.44MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 8
Chirp Center Frequency: 5325.84MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 17
Chirp Center Frequency: 5321.44MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5320.24MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5323.84MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 18
Chirp Center Frequency: 5321.04MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT160) 5570MHz

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_01
Number of Bursts in Trial: 15
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_02
Number of Bursts in Trial: 8
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 20
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 15
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 12
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 14
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 8
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5497.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.43MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5496.03MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.83MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.03MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.83MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.83MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.83MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 16
Chirp Center Frequency: 5642.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 12
Chirp Center Frequency: 5644.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 20
Chirp Center Frequency: 5640.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5643.43MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5643.83MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 8
Chirp Center Frequency: 5646.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 17
Chirp Center Frequency: 5641.83MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5640.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5644.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 18
Chirp Center Frequency: 5641.43MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT240) 5610MHz

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_01
Number of Bursts in Trial: 15
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_02
Number of Bursts in Trial: 8
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 20
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 15
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 12
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 14
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 8
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5497.38MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.58MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5496.18MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.98MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.18MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.78MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.98MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.98MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.78MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.98MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 16
Chirp Center Frequency: 5718.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 12
Chirp Center Frequency: 5721.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 20
Chirp Center Frequency: 5716.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5719.82MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5720.22MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 8
Chirp Center Frequency: 5722.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 17
Chirp Center Frequency: 5718.22MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5717.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5720.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 18
Chirp Center Frequency: 5717.82MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

11.2 Radar Test Signal

The Long Pulse Radar Pattern

802.11be (EHT20) 5500MHz

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_01
Number of Bursts in Trial: 15
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_02
Number of Bursts in Trial: 8
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 20
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 15
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 12
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 14
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 8
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5496.84MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.04MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5495.64MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.44MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 19
Chirp Center Frequency: 5497.64MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.24MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.44MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.44MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.24MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.44MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 16
Chirp Center Frequency: 5503.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 12
Chirp Center Frequency: 5505.91MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 20
Chirp Center Frequency: 5501.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5504.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5505.11MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 8
Chirp Center Frequency: 5507.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 17
Chirp Center Frequency: 5503.11MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5501.91MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5505.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 18
Chirp Center Frequency: 5502.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT40) 5510MHz

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_01
Number of Bursts in Trial: 20
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	98.3	1363	1175	1527
2	1	20	59.5	1786	-	-
3	1	20	64.6	2000	-	-
4	3	20	87.3	1312	1041	1935
5	2	20	82	1790	1873	-
6	3	20	99.5	1768	1370	1100
7	3	20	97.9	1431	1013	1690
8	1	20	51.9	1719	-	-
9	1	20	52.8	1394	-	-
10	3	20	93.1	1454	1906	1783
11	3	20	99.9	1002	1654	1914
12	3	20	99.6	1070	1609	1037
13	2	20	67.7	1851	1766	-
14	3	20	89	1710	1913	1366
15	1	20	62.9	1371	-	-
16	3	20	94.3	1890	1996	1440
17	1	20	50.6	1874	-	-
18	2	20	67.9	1610	1307	-
19	2	20	77.4	1967	1764	-
20	2	20	76.5	1108	1613	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_02
Number of Bursts in Trial: 10
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	8	70.9	1573	1940	-
2	2	8	69.8	1817	1713	-
3	1	8	62.6	1466	-	-
4	1	8	51.8	1676	-	-
5	1	8	50.5	1281	-	-
6	3	8	97.7	1470	1054	1335
7	3	8	97.4	1361	1776	1615
8	2	8	66.8	1716	1645	-
9	3	8	90.6	1275	1192	1422
10	2	8	78.1	1333	1962	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	76.4	1402	1465	-
2	2	9	79	1437	1828	-
3	2	9	82.9	1924	1098	-
4	2	9	79.9	1147	1272	-
5	1	9	61.9	1803	-	-
6	3	9	97.2	1799	1554	1752
7	3	9	93.4	1671	1222	1391
8	2	9	68.5	1300	1034	-
9	1	9	57.7	1632	-	-
10	1	9	54.1	1898	-	-
11	2	9	80.1	1570	1555	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 17
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	87	1888	1666	1153
2	2	16	70.4	1411	1218	-
3	2	16	66.7	1032	1026	-
4	2	16	77.1	1342	1374	-
5	3	16	100	1401	1211	1574
6	2	16	67.1	1728	1380	-
7	3	16	96.7	1887	1544	1831
8	2	16	79	1497	1576	-
9	2	16	71.1	1115	1316	-
10	1	16	60.8	1813	-	-
11	2	16	75.3	1979	1314	-
12	1	16	62	1966	-	-
13	3	16	86.4	1976	1053	1375
14	1	16	58.9	1299	-	-
15	2	16	78.4	1330	1506	-
16	3	16	96.9	1684	1912	1804
17	1	16	62.8	1162	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 16
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	86.8	1022	1689	1821
2	3	15	84.3	1419	1932	1429
3	1	15	52.1	1651	-	-
4	2	15	81.1	1343	1945	-
5	1	15	61.4	1095	-	-
6	2	15	74.8	1009	1458	-
7	2	15	66.7	1388	1575	-
8	2	15	70.8	1455	1492	-
9	1	15	66.6	1075	-	-
10	3	15	87.9	1942	1092	1700
11	2	15	77	1244	1981	-
12	1	15	65.8	1974	-	-
13	1	15	50.8	1220	-	-
14	2	15	82.1	1071	1707	-
15	1	15	60.1	1892	-	-
16	2	15	73.2	1818	1978	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 20
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	96.5	1522	1142	1931
2	3	20	84	1461	1951	1386
3	3	20	99.5	1384	1581	1973
4	3	20	96	1535	1031	1550
5	2	20	74.7	1619	1094	-
6	1	20	50.5	1195	-	-
7	2	20	80.6	1184	1229	-
8	1	20	50.7	1673	-	-
9	3	20	87.8	1729	1475	1183
10	2	20	69.4	1242	1577	-
11	2	20	67.2	1136	1447	-
12	1	20	51	1965	-	-
13	2	20	67	1607	1580	-
14	3	20	96.5	1638	1541	1266
15	2	20	70.9	1489	1459	-
16	3	20	83.5	1114	1759	1106
17	1	20	50.2	1946	-	-
18	2	20	80.6	1121	1165	-
19	2	20	81.8	1213	1021	-
20	2	20	73.4	1677	1856	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 20
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52	1983	-	-
2	3	20	99.1	1878	1916	1398
3	2	20	75.6	1355	1503	-
4	3	20	95.6	1592	1902	1354
5	3	20	100	1578	1504	1779
6	1	20	56.2	1254	-	-
7	3	20	83.4	1947	1020	1383
8	2	20	79.3	1780	1738	-
9	2	20	69.6	1725	1820	-
10	1	20	63.2	1785	-	-
11	2	20	70.3	1367	1062	-
12	2	20	78.7	1617	1368	-
13	1	20	65.1	1772	-	-
14	3	20	88.8	1362	1879	1704
15	3	20	90	1880	1235	1164
16	2	20	75	1533	1899	-
17	2	20	79	1669	1358	-
18	1	20	50.9	1791	-	-
19	3	20	88.1	1255	1685	1167
20	3	20	86.3	1107	1788	1171

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 8
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.7	1309	-	-
2	1	5	51.3	1076	-	-
3	3	5	93.3	1910	1726	1203
4	3	5	92.1	1393	1706	1191
5	1	5	57.5	1833	-	-
6	1	5	65.7	1572	-	-
7	1	5	53.7	1530	-	-
8	2	5	70.1	1825	1992	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 8
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	66.9	1210	1987	-
2	3	5	93.6	1552	1473	1116
3	1	5	65.5	1742	-	-
4	2	5	70.3	1486	1364	-
5	1	5	50.3	1633	-	-
6	3	5	86.8	1135	1871	1260
7	2	5	71.2	1529	1159	-
8	3	5	97.5	1308	1292	1891

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 19
Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	58.3	1564	-	-
2	1	18	53.8	1657	-	-
3	3	18	96.1	1847	1397	1369
4	2	18	68.4	1097	1523	-
5	2	18	67.2	1014	1810	-
6	1	18	51.2	1315	-	-
7	2	18	81.1	1055	1640	-
8	2	18	74.6	1295	1421	-
9	3	18	99.1	1240	1762	1425
10	3	18	88.5	1698	1956	1129
11	3	18	85.9	1937	1872	1678
12	2	18	78.3	1732	1990	-
13	1	18	56.5	1520	-	-
14	3	18	96	1189	1345	1117
15	1	18	54.5	1518	-	-
16	3	18	99.3	1955	1949	1017
17	3	18	92.5	1857	1452	1214
18	3	18	95.6	1104	1670	1999
19	2	18	69.7	1837	1988	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.97MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	50.6	1968	-	-
2	1	20	55.7	1961	-	-
3	3	20	83.6	1893	1521	1433
4	3	20	88	1663	1695	1537
5	3	20	84.2	1822	1253	1881
6	1	20	52.4	1120	-	-
7	1	20	63.2	1123	-	-
8	1	20	62.4	1280	-	-
9	2	20	76.1	1681	1099	-
10	3	20	97.8	1679	1040	1562
11	1	20	50	1267	-	-
12	2	20	78.4	1174	1925	-
13	2	20	78.4	1027	1148	-
14	2	20	67.5	1439	1329	-
15	3	20	92.6	1561	1298	1077
16	1	20	66.6	1087	-	-
17	2	20	75.1	1085	1296	-
18	1	20	54.9	1324	-	-
19	2	20	69.6	1885	1963	-
20	2	20	69.1	1478	1144	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.97MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.4	1124	-	-
2	2	20	70.3	1781	1263	-
3	2	20	68.7	1516	1941	-
4	3	20	93	1045	1844	1328
5	2	20	69.1	1166	1921	-
6	2	20	79.9	1389	1636	-
7	2	20	75.5	1177	1740	-
8	1	20	63.6	1665	-	-
9	2	20	70.9	1686	1986	-
10	3	20	89.1	1357	1047	1332
11	1	20	66.2	1337	-	-
12	2	20	77.8	1283	1801	-
13	1	20	54.8	1501	-	-
14	2	20	67	1138	1132	-
15	2	20	70.6	1066	1028	-
16	3	20	91.7	1216	1805	1658
17	2	20	74.8	1249	1566	-
18	1	20	65.8	1336	-	-
19	1	20	61.8	1378	-	-
20	1	20	65.9	1660	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.97MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	53.9	1525	-	-
2	3	10	88.9	1897	1832	1957
3	1	10	54.9	1176	-	-
4	2	10	76.8	1048	1789	-
5	3	10	99.1	1702	1435	1420
6	1	10	60.1	1757	-	-
7	1	10	57.4	1111	-	-
8	1	10	60.7	1137	-	-
9	1	10	64	1557	-	-
10	2	10	79.4	1524	1746	-
11	2	10	79.4	1883	1954	-
12	3	10	94.4	1850	1051	1024

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 18
Chirp Center Frequency: 5497.77MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	17	72.8	1730	1200	-
2	2	17	76.4	1237	1236	-
3	2	17	67.2	1326	1105	-
4	2	17	80.4	1493	1680	-
5	3	17	87.1	1472	1599	1133
6	3	17	90.6	1491	1682	1494
7	2	17	68.9	1179	1711	-
8	1	17	54.3	1614	-	-
9	2	17	77	1404	1202	-
10	3	17	99.7	1033	1477	1418
11	3	17	91.5	1250	1016	1512
12	3	17	87.1	1761	1579	1128
13	2	17	81.5	1064	1428	-
14	2	17	72.2	1274	1042	-
15	2	17	73.5	1559	1597	-
16	1	17	61.4	1019	-	-
17	3	17	97	1134	1086	1546
18	1	17	50.8	1443	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 11
Chirp Center Frequency: 5494.57MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	9	91.8	1500	1627	1793
2	1	9	59.2	1227	-	-
3	3	9	93.2	1618	1970	1288
4	1	9	53.6	1193	-	-
5	1	9	65.1	1130	-	-
6	1	9	63.6	1920	-	-
7	1	9	65.3	1587	-	-
8	3	9	91.9	1344	1446	1445
9	3	9	94	1687	1773	1800
10	1	9	58.9	1991	-	-
11	2	9	72.4	1450	1630	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.57MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	64.8	1318	-	-
2	3	19	99.6	1232	1453	1943
3	3	19	91.6	1958	1302	1869
4	1	19	59.6	1078	-	-
5	2	19	71.9	1499	1392	-
6	1	19	54.9	1245	-	-
7	2	19	78.4	1998	1181	-
8	3	19	99.8	1722	1542	1485
9	3	19	90.2	1152	1150	1356
10	1	19	54.5	1723	-	-
11	3	19	84.3	1622	1442	1217
12	3	19	97	1731	1727	1471
13	1	19	57.4	1933	-	-
14	3	19	89	1082	1620	1043
15	1	19	54.3	1387	-	-
16	3	19	97.5	1221	1044	1602
17	2	19	67.8	1901	1056	-
18	3	19	95.4	1583	1629	1807
19	2	19	76.8	1515	1291	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 8
Chirp Center Frequency: 5492.97MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	86.6	1269	1340	1824
2	3	5	96.1	1414	1672	1079
3	1	5	63.7	1745	-	-
4	1	5	63.1	1754	-	-
5	3	5	87.6	1349	1938	1625
6	2	5	70.1	1011	1868	-
7	1	5	51.2	1436	-	-
8	2	5	69.1	1894	1709	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.97MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	61.3	1964	-	-
2	1	10	53.6	1001	-	-
3	1	10	65	1688	-	-
4	3	10	95.3	1507	1081	1278
5	3	10	96.7	1372	1763	1718
6	1	10	60	1734	-	-
7	2	10	82	1173	1519	-
8	1	10	62.1	1319	-	-
9	1	10	50	1845	-	-
10	3	10	99.9	1265	1023	1909
11	2	10	77.4	1449	1748	-
12	1	10	59.6	1438	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 15
Chirp Center Frequency: 5496.17MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	67.3	1072	1635	-
2	3	13	95.2	1029	1612	1297
3	1	13	61.6	1127	-	-
4	1	13	56.7	1712	-	-
5	3	13	96.4	1532	1008	1390
6	1	13	57.5	1860	-	-
7	1	13	62.3	1918	-	-
8	3	13	85.7	1797	1594	1463
9	1	13	64.7	1286	-	-
10	1	13	60.7	1276	-	-
11	1	13	66.1	1626	-	-
12	3	13	97.5	1325	1646	1705
13	3	13	96.6	1259	1464	1548
14	2	13	67.1	1170	1591	-
15	2	13	72.3	1826	1084	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 14
Chirp Center Frequency: 5496.17MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	76.3	1641	1915	-
2	1	13	51	1739	-	-
3	3	13	86.5	1827	1247	1424
4	1	13	54	2000	-	-
5	3	13	89.6	1018	1505	1400
6	2	13	70.6	1410	1782	-
7	3	13	85.8	1691	1010	1350
8	2	13	67	1293	1714	-
9	3	13	96.2	1282	1268	1261
10	2	13	75.2	1270	1279	-
11	1	13	59.3	1444	-	-
12	3	13	87.6	1834	1648	1884
13	3	13	86.9	1624	1403	1895
14	2	13	75.5	1432	1536	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 13
Chirp Center Frequency: 5524.89MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	76.8	1551	1408	-
2	1	11	54.3	1994	-	-
3	3	11	97.7	1510	1172	1154
4	3	11	90.5	1528	1118	1395
5	3	11	85.7	1413	1030	1929
6	1	11	59.5	1311	-	-
7	3	11	91.5	1642	1838	1126
8	3	11	84.5	1939	1406	1634
9	1	11	57	1696	-	-
10	2	11	66.7	1692	1877	-
11	2	11	80	1724	1377	-
12	1	11	57.7	1683	-	-
13	1	11	65.6	1637	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 13
Chirp Center Frequency: 5524.89MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	11	54.4	1774	-	-
2	1	11	50.6	1674	-	-
3	3	11	87.5	1735	1598	1199
4	2	11	67.6	1508	1875	-
5	3	11	98.8	1317	1405	1305
6	2	11	79.5	1385	1852	-
7	3	11	87.7	1187	1212	1568
8	1	11	55.6	1795	-	-
9	1	11	61.1	1545	-	-
10	1	11	63.5	1457	-	-
11	3	11	95.8	1341	1239	1460
12	3	11	87.9	1224	1841	1206
13	3	11	89	1151	1984	1110

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 11
Chirp Center Frequency: 5525.69MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	81.5	1025	1993	-
2	2	9	78.1	1156	1659	-
3	1	9	65.5	1534	-	-
4	2	9	81.6	1251	1777	-
5	3	9	87.1	1653	1652	1264
6	2	9	69.9	1644	1209	-
7	2	9	75.4	1331	1376	-
8	1	9	60.1	1119	-	-
9	3	9	87.9	1223	1208	1989
10	1	9	56.4	1778	-	-
11	2	9	68.5	1960	1157	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 8
Chirp Center Frequency: 5527.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	57	1631	-	-
2	1	5	60.8	1934	-	-
3	1	5	57.6	1015	-	-
4	2	5	80.8	1141	1926	-
5	3	5	91.9	1905	1476	1715
6	3	5	94.1	1863	1407	1069
7	2	5	69.7	1751	1708	-
8	2	5	74	1238	1417	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 8
Chirp Center Frequency: 5527.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	81.8	1182	1180	-
2	1	5	55	1498	-	-
3	2	5	81.4	1549	1373	-
4	1	5	66.4	1605	-	-
5	1	5	58.6	1862	-	-
6	1	5	57.5	1853	-	-
7	1	5	60.6	1113	-	-
8	1	5	58.1	1303	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5521.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	99.3	1359	1241	1416
2	2	20	69.9	1560	1131	-
3	1	20	65.7	1571	-	-
4	3	20	90.8	1257	1770	1262
5	1	20	51.8	1065	-	-
6	1	20	52.5	1145	-	-
7	3	20	96.7	1753	1802	1103
8	2	20	78	1196	1830	-
9	1	20	63.4	1228	-	-
10	2	20	69	1067	1083	-
11	2	20	75.4	1621	1462	-
12	2	20	79.7	1864	1277	-
13	1	20	60.1	1840	-	-
14	2	20	82.4	1538	1301	-
15	1	20	55.4	1900	-	-
16	1	20	66.6	1089	-	-
17	3	20	94.2	1936	1509	1870
18	2	20	69	1650	1080	-
19	1	20	60.5	1959	-	-
20	3	20	87.9	1814	1347	1643

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 20
Chirp Center Frequency: 5521.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	71.8	1944	1474	-
2	1	20	56.9	1743	-	-
3	1	20	63.8	1323	-	-
4	2	20	67.1	1007	1158	-
5	3	20	93.8	1426	1327	1858
6	2	20	71.8	1381	1057	-
7	1	20	56	1233	-	-
8	3	20	84	1093	1035	1589
9	1	20	50.1	1285	-	-
10	1	20	61.6	1668	-	-
11	1	20	56.8	1849	-	-
12	2	20	74	1060	1441	-
13	2	20	76.5	1796	1352	-
14	1	20	61.8	1866	-	-
15	2	20	76.2	1353	1225	-
16	3	20	90.2	1271	1758	1886
17	2	20	72.1	1611	1596	-
18	1	20	65.6	1219	-	-
19	2	20	66.7	1168	1109	-
20	1	20	54.4	1379	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 12
Chirp Center Frequency: 5525.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	64.1	1930	-	-
2	2	10	79.7	1972	1068	-
3	2	10	67.3	1737	1794	-
4	2	10	72.9	1865	1396	-
5	2	10	68.6	1052	1809	-
6	3	10	90.1	1747	1903	1558
7	1	10	63.9	1188	-	-
8	3	10	99.5	1346	1842	1360
9	3	10	99.7	1907	1482	1531
10	1	10	64.7	1846	-	-
11	2	10	72.2	1760	1819	-
12	3	10	89.7	1348	1876	1787

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 18
Chirp Center Frequency: 5522.49MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	97	1664	1675	1038
2	2	17	72.7	1484	1543	-
3	3	17	86.3	1526	1904	1950
4	3	17	92.3	1290	1046	1468
5	1	17	56.1	1582	-	-
6	3	17	98.7	1661	1451	1201
7	3	17	97.1	1488	1513	1699
8	2	17	80	1125	1639	-
9	3	17	96.5	1289	1601	1169
10	1	17	62.7	1567	-	-
11	2	17	77.9	1412	1480	-
12	1	17	51.8	1806	-	-
13	1	17	62.1	1197	-	-
14	1	17	51.3	1815	-	-
15	1	17	53.2	1928	-	-
16	3	17	98.3	1588	1036	1769
17	1	17	56.1	1096	-	-
18	1	17	65.2	1953	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 15
Chirp Center Frequency: 5524.09MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	94.5	1908	1178	1339
2	2	13	78.6	1122	1556	-
3	1	13	52.2	1854	-	-
4	1	13	56	1600	-	-
5	2	13	73.8	1927	1481	-
6	3	13	92.2	1490	1771	1736
7	3	13	89.6	1593	1767	1313
8	3	13	91	1517	1146	1569
9	3	13	98.5	1059	1284	1246
10	1	13	53.7	1496	-	-
11	1	13	57.9	1585	-	-
12	1	13	56.6	1198	-	-
13	3	13	84.3	1049	1061	1656
14	3	13	85.4	1005	1540	1479
15	3	13	89.4	1139	1252	1756

802.11be (EHT80) 5530MHz

Long Pulse Radar Test Signal Test Signal Name: LP_SIGNAL_01 Number of Bursts in Trial: 9 Chirp Center Frequency: 5530MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	53.9	1843	-	-
2	2	6	76.9	1553	1668	-
3	3	6	85.7	1090	1717	1602
4	1	6	62.1	1495	-	-
5	2	6	81.9	1856	1815	-
6	2	6	78.3	1325	1383	-
7	3	6	98.7	1569	1823	1570
8	1	6	54.2	1450	-	-
9	3	6	98.7	1560	1972	1336

Long Pulse Radar Test Signal Test Signal Name: LP_SIGNAL_02 Number of Bursts in Trial: 15 Chirp Center Frequency: 5530MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	78.7	1001	1526	-
2	2	13	71.4	1208	1707	-
3	3	13	99.3	1331	1434	1691
4	2	13	78.4	1786	1438	-
5	3	13	92.2	1837	1023	1384
6	1	13	62.1	1910	-	-
7	2	13	82.7	1539	1589	-
8	2	13	72.3	1727	1656	-
9	2	13	69	1494	1098	-
10	1	13	54.1	1231	-	-
11	2	13	68	1518	1253	-
12	3	13	97.5	1146	1004	1945
13	2	13	80.6	1523	1806	-
14	1	13	53.8	1401	-	-
15	3	13	96.6	1690	1379	1238

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 17
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	90.5	1814	1531	1644
2	2	16	77.4	1883	1410	-
3	1	16	58.7	1277	-	-
4	1	16	52.9	1389	-	-
5	2	16	67.8	1222	1487	-
6	3	16	98.8	1654	1933	1164
7	1	16	65.3	1660	-	-
8	2	16	67.1	1084	1684	-
9	1	16	65.9	1417	-	-
10	1	16	56.2	1846	-	-
11	3	16	99.4	1982	1096	1167
12	1	16	55.6	1958	-	-
13	2	16	82.1	1462	1994	-
14	3	16	95.6	1820	1380	1204
15	2	16	66.8	1764	1061	-
16	3	16	98.8	1630	1290	1349
17	1	16	62.1	1312	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 11
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	8	95.3	1852	1464	1855
2	1	8	63.6	1519	-	-
3	2	8	79.7	1911	1179	-
4	1	8	64.1	1703	-	-
5	2	8	80.1	1267	1525	-
6	2	8	79.8	1866	1579	-
7	2	8	81.3	1587	1089	-
8	1	8	65	1741	-	-
9	2	8	74.8	1922	1514	-
10	3	8	97	1106	1962	1674
11	3	8	99.6	1594	1465	1282

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 16
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	86.4	1352	1826	1882
2	1	15	64.3	1030	-	-
3	1	15	57	1073	-	-
4	2	15	73.4	1627	1414	-
5	2	15	73.1	1859	1364	-
6	3	15	89.2	1105	1810	1875
7	2	15	71.6	1831	1151	-
8	1	15	54.4	1188	-	-
9	2	15	69.6	1803	1648	-
10	3	15	95.8	1902	1686	1851
11	3	15	86.5	1415	1486	1165
12	3	15	99.9	1894	1537	1250
13	1	15	63.4	1957	-	-
14	1	15	54.3	1670	-	-
15	2	15	83.3	1871	1757	-
16	2	15	72.1	1100	1112	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 15
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	14	92.9	1948	1402	1642
2	1	14	56.5	1007	-	-
3	1	14	50.5	1215	-	-
4	2	14	76.7	1752	1237	-
5	1	14	52.2	1300	-	-
6	1	14	55.4	1938	-	-
7	1	14	55.8	1025	-	-
8	1	14	52.2	1873	-	-
9	2	14	66.9	1199	1565	-
10	2	14	74.2	1503	1124	-
11	2	14	82.4	1340	1391	-
12	1	14	60.4	1791	-	-
13	3	14	97.7	1377	1459	1442
14	2	14	77.4	1748	1333	-
15	3	14	87.9	1005	1493	1763

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 20
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.1	1262	1205	1159
2	1	20	51.8	1271	-	-
3	1	20	65.7	1513	-	-
4	2	20	80.8	1575	1095	-
5	1	20	51.6	1453	-	-
6	3	20	99.3	1736	1181	1963
7	2	20	76	1567	1000	-
8	2	20	82.6	1898	1251	-
9	3	20	93	1558	1974	1611
10	2	20	74	1445	1608	-
11	1	20	62.3	1011	-	-
12	2	20	79.1	1841	1265	-
13	1	20	66.4	1158	-	-
14	1	20	58.8	1722	-	-
15	1	20	63.8	1672	-	-
16	1	20	66.3	1232	-	-
17	1	20	59.8	1693	-	-
18	3	20	96.8	1792	1929	1256
19	1	20	57.7	1868	-	-
20	3	20	88.5	1472	1930	1305

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 9
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	58.5	1529	-	-
2	2	6	74.2	1661	1926	-
3	2	6	70.3	1789	1683	-
4	3	6	97.4	1807	1063	1799
5	2	6	80.9	1750	1777	-
6	1	6	58.5	1723	-	-
7	1	6	54.8	1774	-	-
8	1	6	56.4	1152	-	-
9	3	6	99	1819	1599	1847

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 20
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	56.7	1643	-	-
2	1	20	61.2	1685	-	-
3	1	20	56.8	1248	-	-
4	3	20	92.3	1530	1733	1317
5	1	20	57.9	1951	-	-
6	3	20	93.4	1270	1700	1893
7	3	20	98.1	1999	1781	1485
8	3	20	97.7	1203	1002	1780
9	2	20	73.6	1583	1287	-
10	2	20	81.7	1202	1701	-
11	2	20	72.8	1021	1225	-
12	2	20	66.9	1897	1172	-
13	2	20	74	1640	1110	-
14	1	20	57.5	1659	-	-
15	1	20	52.7	1274	-	-
16	3	20	89.9	1498	1310	1131
17	2	20	76.4	1193	1795	-
18	3	20	89.4	1840	1413	1360
19	3	20	93.4	1425	1715	1769
20	1	20	53.1	1971	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 15
Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	57.8	1147	-	-
2	2	14	72.6	1491	1329	-
3	1	14	63.6	1298	-	-
4	3	14	89.9	1850	1320	1313
5	3	14	88.9	1651	1046	1509
6	2	14	79.4	1508	1422	-
7	2	14	68.8	1440	1351	-
8	2	14	81.6	1060	1034	-
9	2	14	68.4	1009	1952	-
10	3	14	99.9	1385	1428	1586
11	3	14	93.2	1581	1209	1942
12	3	14	94.5	1423	1988	1507
13	2	14	69.6	1273	1845	-
14	3	14	83.6	1062	1207	1771
15	3	14	86.3	1264	1143	1624

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 13
Chirp Center Frequency: 5495.47MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	11	62.7	1940	-	-
2	1	11	55.5	1373	-	-
3	3	11	86.9	1400	1628	1019
4	1	11	58.5	1015	-	-
5	1	11	65.4	1316	-	-
6	1	11	65.8	1745	-	-
7	2	11	68.7	1879	1641	-
8	3	11	86.3	1724	1016	1236
9	1	11	65.1	1255	-	-
10	3	11	84.9	1252	1761	1371
11	2	11	71.6	1804	1285	-
12	3	11	84.5	1696	1896	1838
13	1	11	66.6	1542	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 20
Chirp Center Frequency: 5499.07MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	67.5	1361	1749	-
2	1	20	57.5	1490	-	-
3	1	20	54.5	1210	-	-
4	2	20	69.1	1353	1065	-
5	1	20	61.4	1829	-	-
6	1	20	53.2	1631	-	-
7	3	20	91.1	1909	1622	1688
8	3	20	84.1	1556	1931	1350
9	3	20	97.6	1732	1049	1176
10	2	20	67	1805	1784	-
11	1	20	53.3	1844	-	-
12	2	20	78.5	1878	1941	-
13	2	20	74.6	1408	1559	-
14	1	20	66.4	1108	-	-
15	2	20	79.2	1228	1808	-
16	2	20	73.7	1918	1040	-
17	3	20	88.5	1334	1137	1309
18	2	20	78.4	1058	1953	-
19	3	20	97.4	1219	1263	1540
20	3	20	90.4	1905	1304	1891

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5496.67MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	14	71.3	1768	1620	-
2	3	14	90	1991	1097	1031
3	3	14	84.3	1114	1013	1276
4	3	14	89.5	1148	1625	1042
5	2	14	80.9	1242	1234	-
6	2	14	78	1032	1076	-
7	3	14	87.4	1489	1121	1979
8	3	14	89.2	1411	1221	1357
9	3	14	86.4	1614	1239	1964
10	3	14	98.5	1120	1045	1220
11	1	14	55	1033	-	-
12	2	14	67.3	1163	1430	-
13	3	14	94.9	1180	1824	1047
14	1	14	52.2	1900	-	-
15	1	14	64	1460	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 18
Chirp Center Frequency: 5498.27MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.9	1418	-	-
2	3	18	95.4	1895	1330	1793
3	2	18	74	1754	1323	-
4	2	18	83.1	1444	1506	-
5	1	18	66.3	1877	-	-
6	3	18	92.6	1839	1544	1751
7	1	18	52.1	1816	-	-
8	1	18	65.1	1917	-	-
9	3	18	88.5	1241	1758	1315
10	3	18	83.5	1623	1969	1538
11	2	18	80	1224	1580	-
12	3	18	90.9	1725	1658	1372
13	3	18	99.4	1269	1564	1973
14	3	18	89.5	1314	1916	1711
15	1	18	62.5	1573	-	-
16	2	18	76.7	1574	1731	-
17	1	18	56.5	1716	-	-
18	2	18	74.2	1469	1734	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 11
Chirp Center Frequency: 5494.27MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	8	94.2	1861	1662	1550
2	3	8	95.3	1367	1244	1093
3	2	8	77.6	1697	1578	-
4	2	8	73.2	1038	1704	-
5	1	8	65	1908	-	-
6	3	8	88.3	1070	1610	1981
7	3	8	83.4	1864	1788	1286
8	1	8	65.9	1053	-	-
9	1	8	51.8	1322	-	-
10	3	8	97.8	1129	1949	1618
11	3	8	99.2	1141	1996	1997

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 16
Chirp Center Frequency: 5497.07MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	15	62	1880	-	-
2	3	15	86	1133	1136	1399
3	3	15	83.6	1196	1600	1201
4	2	15	72.3	1484	1054	-
5	1	15	52.4	1778	-	-
6	2	15	68.2	1258	1052	-
7	2	15	78.3	1431	1397	-
8	1	15	64.4	1961	-	-
9	3	15	95.3	1454	1676	1616
10	2	15	81.1	1471	1192	-
11	3	15	97.8	1767	1652	1461
12	2	15	69.2	1126	1742	-
13	2	15	74.9	1987	1407	-
14	3	15	95.9	1387	1737	1562
15	1	15	56	1102	-	-
16	1	15	50.8	1947	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 13
Chirp Center Frequency: 5495.87MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	87.2	1775	1637	1111
2	3	12	88.1	1985	1449	1326
3	3	12	99.7	1719	1666	1657
4	2	12	73.8	1406	1227	-
5	2	12	71.8	1800	1119	-
6	3	12	98.5	1521	1059	1257
7	3	12	93.2	1710	1099	1343
8	1	12	50.7	1629	-	-
9	1	12	56.9	1821	-	-
10	3	12	86.5	1606	1139	1884
11	3	12	87.8	1946	1477	1904
12	2	12	80.3	1566	1324	-
13	3	12	85.8	1156	1128	1582

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5495.47MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	99.7	1067	1134	1919
2	1	11	50.4	1022	-	-
3	3	11	90.8	1026	1044	1500
4	1	11	54.3	1740	-	-
5	1	11	66	1639	-	-
6	2	11	76.5	1341	1726	-
7	3	11	97.5	1072	1832	1812
8	3	11	96.4	1346	1718	1050
9	2	11	68.5	1813	1480	-
10	3	11	96.9	1153	1008	1451
11	2	11	71.2	1439	1378	-
12	3	11	84.2	1977	1729	1532

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 9
Chirp Center Frequency: 5493.47MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	62.2	1479	-	-
2	1	6	61.2	1597	-	-
3	3	6	93.2	1278	1944	1664
4	3	6	96.4	1598	1254	1229
5	2	6	76.1	1233	1113	-
6	1	6	52.7	1746	-	-
7	2	6	77.4	1568	1348	-
8	1	6	59	1223	-	-
9	3	6	87.4	1928	1937	1214

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 12
Chirp Center Frequency: 5495.07MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	96.3	1520	1936	1885
2	2	10	77.8	1082	1039	-
3	1	10	52.1	1184	-	-
4	2	10	74	1375	1753	-
5	2	10	77.3	1296	1321	-
6	1	10	63.5	1426	-	-
7	3	10	92.9	1029	1932	1194
8	2	10	82.9	1770	1335	-
9	1	10	65.4	1548	-	-
10	1	10	66	1901	-	-
11	2	10	80.5	1382	1915	-
12	3	10	98	1955	1980	1370

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 20
Chirp Center Frequency: 5560.72MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	78.6	1796	1593	-
2	3	20	95.7	1601	1198	1217
3	2	20	80.7	1051	1633	-
4	1	20	57	1609	-	-
5	1	20	64.8	1655	-	-
6	1	20	58.8	1511	-	-
7	2	20	69.3	1645	1869	-
8	1	20	58.5	1249	-	-
9	1	20	54.5	1621	-	-
10	2	20	68.6	1302	1416	-
11	3	20	91.2	1437	1394	1466
12	2	20	78.4	1603	1721	-
13	3	20	89.6	1496	1104	1347
14	1	20	59.6	1617	-	-
15	3	20	87.3	1966	1552	1970
16	3	20	100	1432	1366	1802
17	1	20	54.4	1470	-	-
18	2	20	80.9	1281	1420	-
19	3	20	83.8	1359	1327	1481
20	1	20	60.3	1457	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 15
Chirp Center Frequency: 5563.12MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	14	71.3	1017	1344	-
2	3	14	98.5	1037	1171	1355
3	1	14	53.4	1547	-	-
4	2	14	72.6	1197	1607	-
5	3	14	88.6	1794	1175	1892
6	2	14	80.4	1595	1694	-
7	3	14	88.7	1014	1773	1433
8	1	14	63	1499	-	-
9	1	14	54.5	1027	-	-
10	1	14	63.5	1405	-	-
11	1	14	53	1299	-	-
12	2	14	80.9	1056	1303	-
13	3	14	90.8	1743	1115	1517
14	3	14	86.3	1259	1649	1663
15	3	14	83.6	1533	1699	1332

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 9
Chirp Center Frequency: 5566.32MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	65.6	1886	-	-
2	1	6	62.5	1279	-	-
3	3	6	89.3	1140	1474	1283
4	1	6	61.2	1571	-	-
5	3	6	93.9	1081	1834	1240
6	1	6	58	1890	-	-
7	1	6	50.4	1702	-	-
8	2	6	82.9	1638	1635	-
9	2	6	77.6	1354	1669	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 20
Chirp Center Frequency: 5561.12MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	86.6	1543	1083	1888
2	2	19	73.8	1246	1342	-
3	3	19	84.4	1956	1920	1122
4	2	19	67.7	1376	1182	-
5	2	19	76.2	1925	1667	-
6	3	19	93	1291	1555	1189
7	2	19	78.4	1012	1546	-
8	3	19	84.6	1369	1132	1766
9	2	19	82.3	1943	1455	-
10	2	19	70.1	1160	1103	-
11	2	19	76.7	1458	1720	-
12	2	19	80.2	1363	1671	-
13	3	19	92.3	1673	1288	2000
14	1	19	58	1835	-	-
15	2	19	68.5	1572	1135	-
16	3	19	84.5	1091	1272	1035
17	2	19	70.2	1289	1028	-
18	1	19	56.2	1130	-	-
19	1	19	53.9	1881	-	-
20	3	19	91	1678	1782	1551

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 18
Chirp Center Frequency: 5561.92MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	17	65.6	1809	-	-
2	1	17	60.3	1435	-	-
3	3	17	87.7	1858	1446	1849
4	1	17	53.3	1116	-	-
5	2	17	76	1162	1924	-
6	2	17	71.7	1554	1790	-
7	3	17	87.4	1787	1306	1421
8	1	17	65.1	1677	-	-
9	2	17	69.6	1906	1862	-
10	3	17	90	1154	1107	1739
11	1	17	52.2	1535	-	-
12	2	17	70.9	1527	1109	-
13	1	17	65.6	1125	-	-
14	2	17	75.8	1830	1613	-
15	3	17	86	1825	1475	1284
16	1	17	64.8	1992	-	-
17	3	17	96	1993	1899	1396
18	2	17	70.9	1142	1381	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 15
Chirp Center Frequency: 5563.52MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	86.8	1168	1968	1297
2	1	13	61.6	1965	-	-
3	3	13	85.1	1604	1118	1057
4	2	13	68.5	1524	1266	-
5	3	13	98.7	1989	1218	1584
6	2	13	70.6	1939	1187	-
7	1	13	59.5	1967	-	-
8	1	13	53.3	1245	-	-
9	2	13	73.4	1356	1665	-
10	1	13	54.4	1216	-	-
11	2	13	70.8	1086	1647	-
12	2	13	76.8	1452	1169	-
13	2	13	73.6	1195	1502	-
14	1	13	51.8	1328	-	-
15	3	13	96.5	1374	1515	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 10
Chirp Center Frequency: 5565.92MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	7	91.9	1590	1612	1068
2	1	7	62	1687	-	-
3	2	7	76.3	1854	1822	-
4	3	7	86.1	1123	1488	1088
5	2	7	81.1	1619	1427	-
6	3	7	91.7	1268	1393	1907
7	1	7	54.5	1680	-	-
8	1	7	55.5	1041	-	-
9	1	7	63.3	1476	-	-
10	1	7	64.9	1145	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 8
Chirp Center Frequency: 5566.72MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.4	1735	1934	1679
2	2	5	67.9	1983	1776	-
3	1	5	55.7	1797	-	-
4	1	5	64.6	1561	-	-
5	1	5	66.4	1923	-	-
6	2	5	72.1	1585	1436	-
7	1	5	53.6	1211	-	-
8	3	5	88.5	1675	1653	1914

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5564.72MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	99.3	1995	1522	1150
2	2	10	69.4	1235	1185	-
3	3	10	92.4	1534	1018	1865
4	1	10	55.9	1785	-	-
5	3	10	97.1	1443	1681	1738
6	1	10	61.7	1921	-	-
7	2	10	67.1	1646	1412	-
8	3	10	93.8	1747	1339	1959
9	2	10	72.6	1863	1010	-
10	3	10	98.4	1020	1368	1473
11	2	10	82.9	1913	1505	-
12	3	10	94.4	1247	1392	1213

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 20
Chirp Center Frequency: 5560.72MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	92.9	1395	1069	1765
2	1	20	66.3	1848	-	-
3	1	20	50.4	1260	-	-
4	2	20	74.5	1085	1055	-
5	2	20	73.7	1177	1186	-
6	1	20	63.7	1448	-	-
7	1	20	59.7	1409	-	-
8	2	20	78.8	1978	1230	-
9	1	20	64.9	1087	-	-
10	2	20	79.2	1650	1730	-
11	2	20	82.3	1077	1456	-
12	1	20	56.1	1003	-	-
13	2	20	71.8	1155	1759	-
14	1	20	53.5	1950	-	-
15	1	20	56.3	1292	-	-
16	1	20	52.7	1074	-	-
17	1	20	53.8	1483	-	-
18	3	20	88.8	1036	1817	1467
19	1	20	56.9	1386	-	-
20	2	20	82.4	1762	1173	-

802.11be (EHT160) 5250MHz

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_01
Number of Bursts in Trial: 15
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_02
Number of Bursts in Trial: 8
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 20
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 15
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 12
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 14
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 8
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5256.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 19
Chirp Center Frequency: 5257.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5255.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 12
Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 19
Chirp Center Frequency: 5257.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5254.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 14
Chirp Center Frequency: 5254.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 12
Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 16
Chirp Center Frequency: 5322.11MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 12
Chirp Center Frequency: 5324.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 20
Chirp Center Frequency: 5320.11MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5323.31MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5323.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 8
Chirp Center Frequency: 5326.11MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 17
Chirp Center Frequency: 5321.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5320.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5324.11MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 18
Chirp Center Frequency: 5321.31MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT160) 5570MHz

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_01
Number of Bursts in Trial: 15
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_02
Number of Bursts in Trial: 8
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 20
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 15
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 12
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 14
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 8
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5497.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.41MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5496.01MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.81MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 19
Chirp Center Frequency: 5498.01MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.61MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.81MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.81MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.61MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.81MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 16
Chirp Center Frequency: 5642.56MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 12
Chirp Center Frequency: 5644.96MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 20
Chirp Center Frequency: 5640.56MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5643.76MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5644.16MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 8
Chirp Center Frequency: 5646.56MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 17
Chirp Center Frequency: 5642.16MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5640.96MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5644.56MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 18
Chirp Center Frequency: 5641.76MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT240) 5610MHz

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_01
Number of Bursts in Trial: 15
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_02
Number of Bursts in Trial: 8
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 20
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 15
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 12
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 14
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 8
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5496.61MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 19
Chirp Center Frequency: 5497.81MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5495.41MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 19
Chirp Center Frequency: 5497.41MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.01MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_18
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_19
Number of Bursts in Trial: 14
Chirp Center Frequency: 5495.01MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 12
Chirp Center Frequency: 5494.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 16
Chirp Center Frequency: 5718.24MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 12
Chirp Center Frequency: 5720.64MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 20
Chirp Center Frequency: 5716.24MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5719.44MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5719.84MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 8
Chirp Center Frequency: 5722.24MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_27
Number of Bursts in Trial: 17
Chirp Center Frequency: 5717.84MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5716.64MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5720.24MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 18
Chirp Center Frequency: 5717.44MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

--- END ---