

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBBQZ-WTW-P26050063-2

FCC ID: PY325300650

Product: Orbi 11BE WiFi 7 Tri-band Router & Orbi 11BE WiFi 7 Tri-band Satellite
(refer to item 3.1 for more details)

Brand: NETGEAR

Model No.: RBE781

Series Model: RBE780 (refer to item 3.1 for more details)

Received Date: 2026/5/5

Test Date: 2026/6/21 ~ 2026/7/1

Issued Date: 2026/8/18

Applicant and Manufacturer: NETGEAR, INC.

Address: 3553 North First Street, San Jose, CA 95134, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City 244, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 333, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:

Approved by:

Jeremy Lin

Date:

2026/8/18

Jeremy Lin / Project Engineer

This test report consists of 179 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Vera Huang / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/>, and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	7
3.3 EUT Power Level.....	9
4 Test Instruments	10
4.1 U-NII Detection Bandwidth	10
4.2 Channel Availability Check Time	10
4.3 Channel Closing Transmission and Channel Move Time	10
4.4 Non-Occupancy Period	10
4.5 Statistical Performance Check	10
5 Limits of Test Items.....	11
5.1 Working Modes and Required Test Items	11
5.2 Test Limits and Radar Signal Parameters	12
6 Test Arrangements.....	15
6.1 Test Setup.....	15
6.2 Test Procedure	17
6.2.1 DFS Measurement System.....	17
6.2.2 Calibration of DFS Detection Threshold Level.....	20
6.2.3 DFS Detection Threshold.....	21
6.2.4 DFS Companion Device	25
7 Test Results of Test Item	26
7.1 U-NII Detection Bandwidth	26
7.2 Channel Availability Check Time	34
7.3 Channel Closing Transmission and Channel Move Time	36
7.4 Non-Occupancy Period	41
7.5 Statistical Performance Check	43
8 Declaration of Conformity by the Manufacturer	81
8.1 Transmit Power Control (TPC)	81
8.2 Statement of Manufacturer	81
9 Pictures of Test Arrangements	82
10 Information of the Testing Laboratories	83
11 Appendix.....	84
11.1 Radar Test Signal	84

Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P26050063-2	Original Release	2026/8/18

1 Certificate

Product: Orbi 11BE WiFi 7 Tri-band Router & Orbi 11BE WiFi 7 Tri-band Satellite
(refer to item 3.1 for more details)

Brand: NETGEAR

Test Model: RBE781

Series Model: RBE780 (refer to item 3.1 for more details)

Sample Status: Engineering sample

Applicant and Manufacturer: NETGEAR, INC.

Test Date: 2026/6/21 ~ 2026/7/1

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(h)	U-NII Detection Bandwidth	Pass	Applicable
15.407(h)	Channel Availability Check Time	Pass	Applicable
15.407(h)	Channel Closing Transmission and Channel Move Time	Pass	Applicable
15.407(h)	Non-Occupancy Period	Pass	Applicable
15.407(h)	Statistical Performance Check	Pass	Applicable
15.407(h)	Non-Associated Test	N/A	Not Applicable

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Orbi 11BE WiFi 7 Tri-band Router & Orbi 11BE WiFi 7 Tri-band Satellite
Brand	NETGEAR
Test Model	RBE781
Series Model	RBE780
Model Difference	Refer to note
DFS Firmware/software version	OpenWrt 23.05-SNAPSHOT r0-5f4eb28c2 / LuCI SPF12.5_CSU1 branch git-24.299.05775-9650f6c
Operational Mode	EasyMesh Master (with TPC function)
Operating Frequency Band	5.25 GHz ~ 5.35 GHz 5.47 GHz ~ 5.725 GHz
Communication Mode	IP based
Channel Puncturing Function	Not Support

Note:

1. The EUT has two SKUs, and the RF circuits, antenna designs and GUI FW of these two SKUs are identical; the only difference is the number of Ethernet ports, which does not affect the fundamental RF characteristics and parameters. In accordance with KDB 905462, EasyMesh mode validation is conducted by performing a statistical performance test on any single radar type.

2. All models are listed as below.

Product Description	Model	Difference
Orbi 11BE WiFi 7 Tri-band Router	RBE781	DFS mode: Master mode Four 2.5G Ethernet ports (1WAN+3LAN)
Orbi 11BE WiFi 7 Tri-band Satellite	RBE780	DFS mode: Mesh mode Two 2.5G Ethernet ports (2LAN)

3. The EUT uses following accessories.

AC Adapter 1	Brand	NETGEAR
	Model	ADS-40FPC-12 12030E
	Part Number	332-11771-01
	AC Input	100-240V 50/60Hz 1.0A
	DC Output	12.0V 2.5A 30.0W
	DC Output Cable	1.81M / 0 core
	Manufacturer	Vietnam Honor High Tech Company Limited
AC Adapter 2	Brand	NETGEAR
	Model	2AED030FC
	Part Number	332-11774-01
	AC Input	100-240V 50/60Hz 1.0A
	DC Output	12.0V 2.5A 30.0W
	DC Output Cable	1.83M / 0 core
	Manufacturer	CWT
RJ45 Cable	Brand	NETGEAR
	Model	-
	Part Number	-
	Signal Line	1.97m non-shielded and without core

4. There are WLAN (2.4 GHz, 5 GHz, 6 GHz), Bluetooth, and Threads technology used for the EUT.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	RF Chain No.	Brand	Model	Antenna Gain (dBi)	Frequency range	Antenna Type	Connector Type
1	0	Galtronics	02129140-08099-2	2.68	2.4~2.4835GHz	Monopole	ipex(MHF)
				2.49	5.15~5.25GHz		
				3.13	5.25~5.35GHz		
				4.25	5.47~5.725GHz		
				4.58	5.725~5.85GHz		
				4.58	5.850~5.895GHz		
2	1	Galtronics	02129140-08099-1	3.4	2.4~2.4835GHz	Monopole	ipex(MHF)
				3.77	5.15~5.25GHz		
				3.84	5.25~5.35GHz		
				3.72	5.47~5.725GHz		
				3.78	5.725~5.85GHz		
				4.12	5.850~5.895GHz		
3	0	Galtronics	02129475-08099-7	3.85	5.925~6.425GHz	Monopole	ipex(MHF)
				4.63	6.425~6.525GHz		
				4.63	6.525~6.875GHz		
				3.67	6.875~7.125GHz		
4	1	Galtronics	02129475-08099-4	5.84	5.925~6.425GHz	Monopole	ipex(MHF)
				5.84	6.425~6.525GHz		
				5.79	6.525~6.875GHz		
				4.05	6.875~7.125GHz		
5	2	Galtronics	02129475-08099-6	3.42	5.925~6.425GHz	Monopole	ipex(MHF)
				3.54	6.425~6.525GHz		
				4.45	6.525~6.875GHz		
				3.67	6.875~7.125GHz		
6	3	Galtronics	02129475-08099-8	4.4	5.925~6.425GHz	Monopole	ipex(MHF)
				4.87	6.425~6.525GHz		
				5.03	6.525~6.875GHz		
				6	6.875~7.125GHz		
7	0	Galtronics	02102073-08099-3	2.43	2.4~2.4835GHz	Alford Loop	ipex(MHF)

Frequency range (GHz)	Directional Gain (dBi)
2.4~2.4835	4.91
5.15 ~ 5.25	5.39
5.25 ~ 5.35	5.9
5.47 ~ 5.725	5.49
5.725 ~ 5.85	5.75
5.850 ~ 5.895	5.75

For DFS related test requirements, select the minimum antenna gain value as the representative test. The table below shows the applicable minimum gain values for each operating frequency band.

Frequency Band	Minimum Antenna Gain (dBi)
5GHz UNII-2a & UNII-2c	2.49

Frequency range (GHz)	Directional Gain (dBi)			
	Antenna 3 + 5	Antenna 3 + 6	Antenna 4 + 5	Antenna 4 + 6
5.925~6.425	4.7	5.76	4.84	5.12
6.425~6.525	4.95	5.8	4.77	5.98
6.525~6.875	5.41	5.8	4.48	5.98
6.875~7.125	4.51	5.1	3.93	5.68

* The detailed antenna information, please refer to RBE781, RBE780 Directional Gain Measurement data.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	CDD Mode	Beamforming Mode
802.11a	Nss1	Not Support
802.11n (HT20)	Nss1 / Nss2	Nss1 / Nss2
802.11n (HT40)	Nss1 / Nss2	Nss1 / Nss2
802.11ac (VHT20)	Nss1 / Nss2	Nss1 / Nss2
802.11ac (VHT40)	Nss1 / Nss2	Nss1 / Nss2
802.11ac (VHT80)	Nss1 / Nss2	Nss1 / Nss2
802.11ac (VHT160)	Nss1 / Nss2	Nss1 / Nss2
802.11ax (HE20)	Nss1 / Nss2	Nss1 / Nss2
802.11ax (HE40)	Nss1 / Nss2	Nss1 / Nss2
802.11ax (HE80)	Nss1 / Nss2	Nss1 / Nss2
802.11ax (HE160)	Nss1 / Nss2	Nss1 / Nss2
802.11be (EHT20)	Nss1 / Nss2	Nss1 / Nss2
802.11be (EHT40)	Nss1 / Nss2	Nss1 / Nss2
802.11be (EHT80)	Nss1 / Nss2	Nss1 / Nss2
802.11be (EHT160)	Nss1 / Nss2	Nss1 / Nss2
802.11be (EHT240)	Nss1 / Nss2	Nss1 / Nss2

3.3 EUT Power Level

Highest Power Level						
Signal Mode	Frequency Band (MHz)	Conducted Power		Gain (dBi)	EIRP	
		(mW)	(dBm)		(mW)	(dBm)
CDD	5250-5350	214.798	23.32	3.84	520.032	27.16
	5470-5725	217.737	23.38	4.25	579.338	27.63
Beamforming	5250-5350	214.798	23.32	5.9	835.661	29.22
	5470-5725	217.737	23.38	5.49	770.783	28.87

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 U-NII Detection Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
EMI Test Receiver R&S	ESR7	101451	2026/4/4	2027/4/3
EXA Signal Analyzer Agilent	N9010A	MY52220207	2026/3/23	2027/3/22
MXG Vector signal generator Keysight	N5182B	MY53052282	2026/1/2	2027/1/1
Software BV	BVDFS_Auto- ISM_Workbench_V2A2	N/A	N/A	N/A

Notes:

1. The test was performed in Huaya - DFS room.
2. Tested Date: 2026/6/21 ~ 2026/6/30

4.2 Channel Availability Check Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.3 Channel Closing Transmission and Channel Move Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 Non-Occupancy Period

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Statistical Performance Check

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
EMI Test Receiver R&S	ESR7	101451	2026/4/4	2027/4/3
EXA Signal Analyzer Agilent	N9010A	MY52220207	2026/3/23	2027/3/22
MXG Vector signal generator Keysight	N5182B	MY53052282	2026/1/2	2027/1/1
Software BV	BVDFS_Auto- ISM_Workbench_V2A2	N/A	N/A	N/A

Notes:

1. The test was performed in Huaya - DFS room.
2. Tested Date: 2026/6/21 ~ 2026/7/1

5 Limits of Test Items

5.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 1: Applicability of DFS Requirements Prior To Use a Channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓ note	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Note: Per KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.

Table 2: Applicability of DFS Requirements during Normal Operation.

Requirement	Operational Mode	
	Master or Client with radar detection	Client without radar detection
DFS Detection Threshold	✓	Not required
Channel Closing Transmission Time	✓	✓
Channel Move Time	✓	✓
U-NII Detection Bandwidth	✓	Not required

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

5.2 Test Limits and Radar Signal Parameters

Detection Threshold Values

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Parameters of DFS Test Waveforms

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a ----- Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\lceil \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 6: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30
Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency. a) the Channel center frequency b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth It include 10 trails for every subset, the formula as below, For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel. For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by: $FL + (0.4 * \text{Chirp Width [in MHz]})$ For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by: $FH - (0.4 * \text{Chirp Width [in MHz]})$							

Table 7: Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

6 Test Arrangements

6.1 Test Setup

Conducted measurement


Master Mode

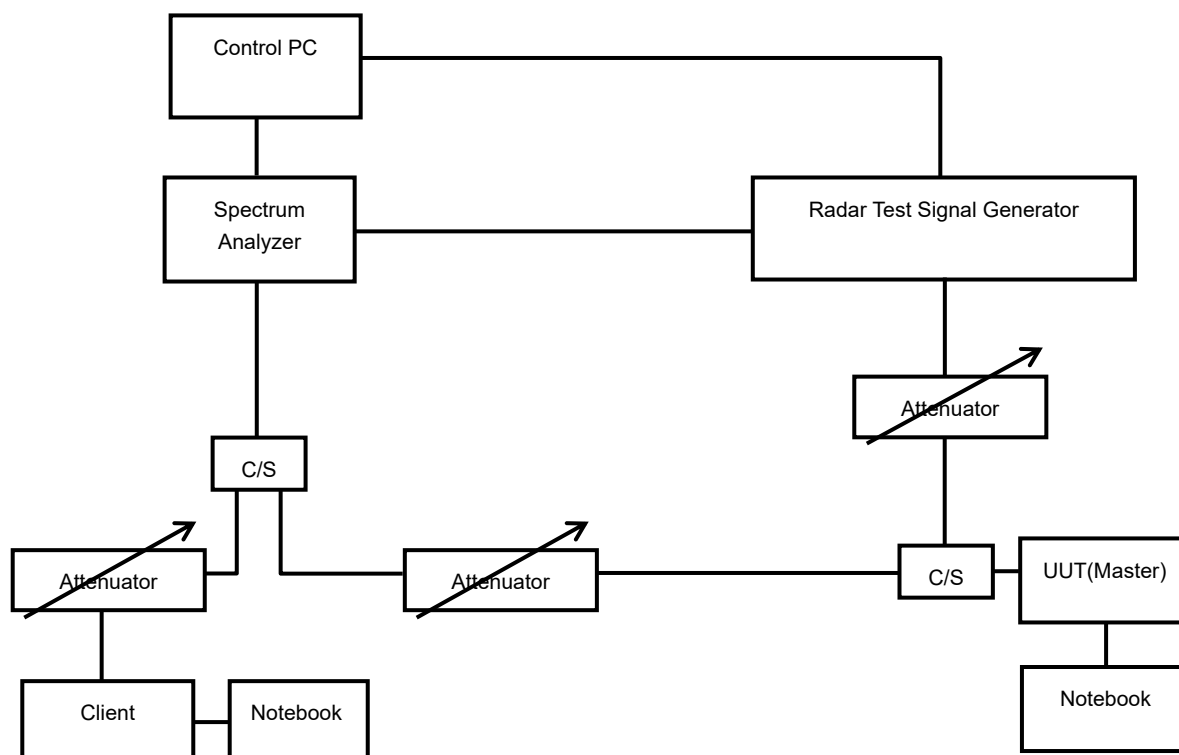

The UUT is a U-NII Device operating in Master mode. The radar test signals are injected into the Master Device.

Note: The correction factor has already been compensated by the instrument.

EasyMesh Mode

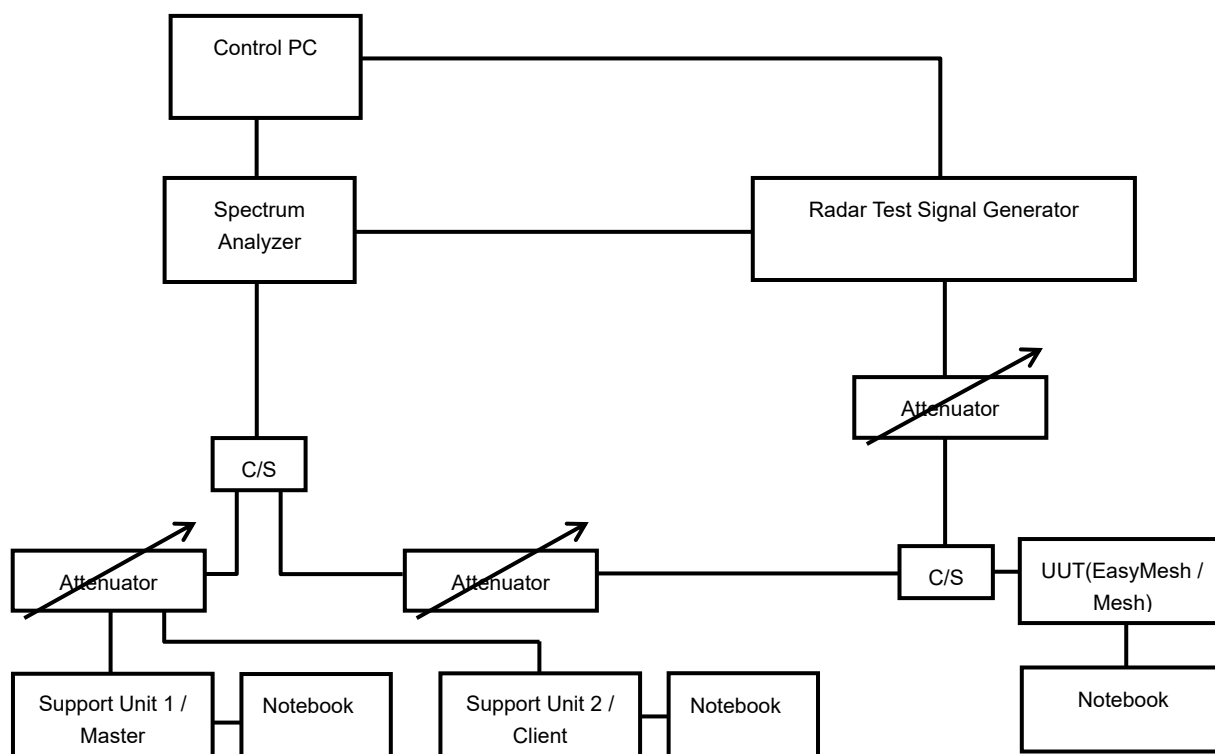

The UUT is a U-NII Device operating in EasyMesh / Mesh mode. The radar test signals are injected into the Master Device.


Note: The correction factor has already been compensated by the instrument.

6.2 Test Procedure

6.2.1 DFS Measurement System

A complete DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating system and (2) the Traffic Monitoring system. The control PC is necessary for generating the Radar waveforms in Table 5, 6 and 7. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

Conducted Setup Configuration of DFS Measurement System

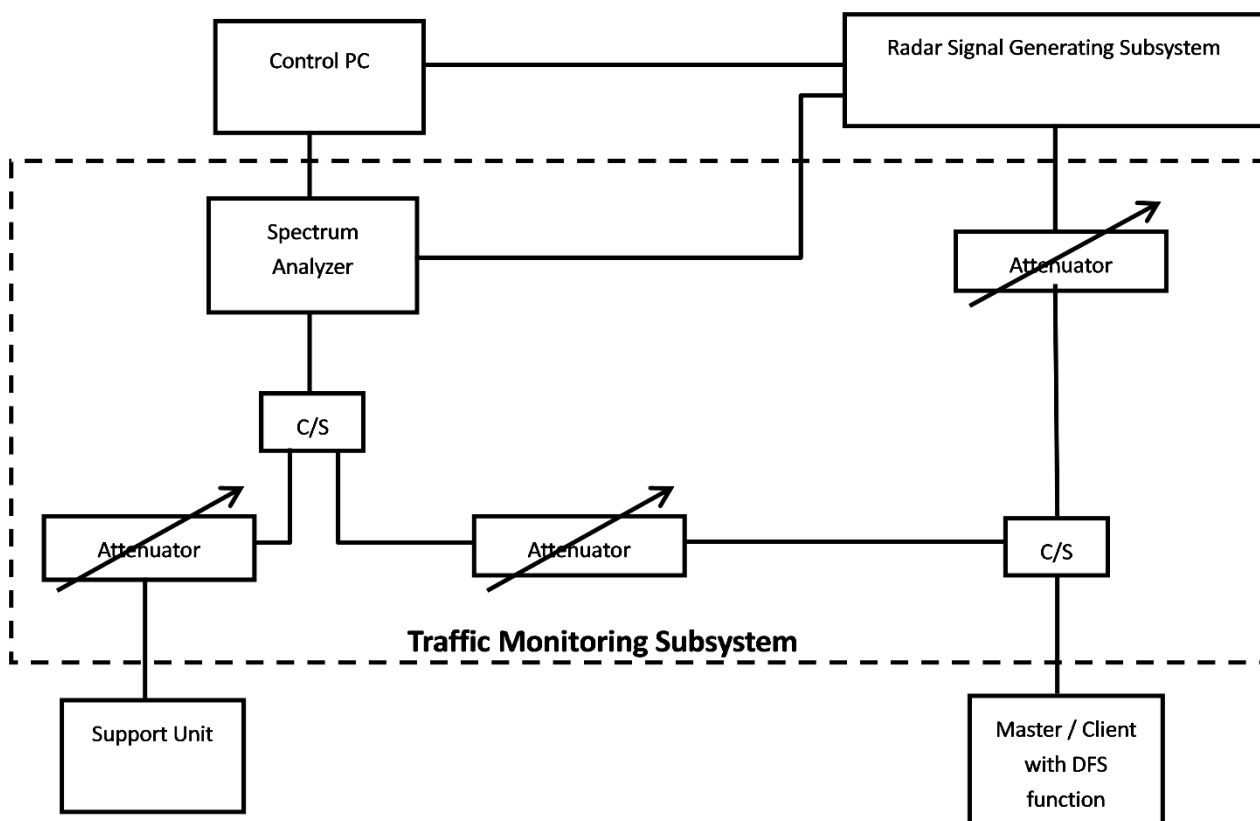

Note: The correction factor has already been compensated by the instrument.


Channel Loading

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

Applicable	Requirements apply
	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
√	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.


Plots of Channel Loading

Duty Cycle

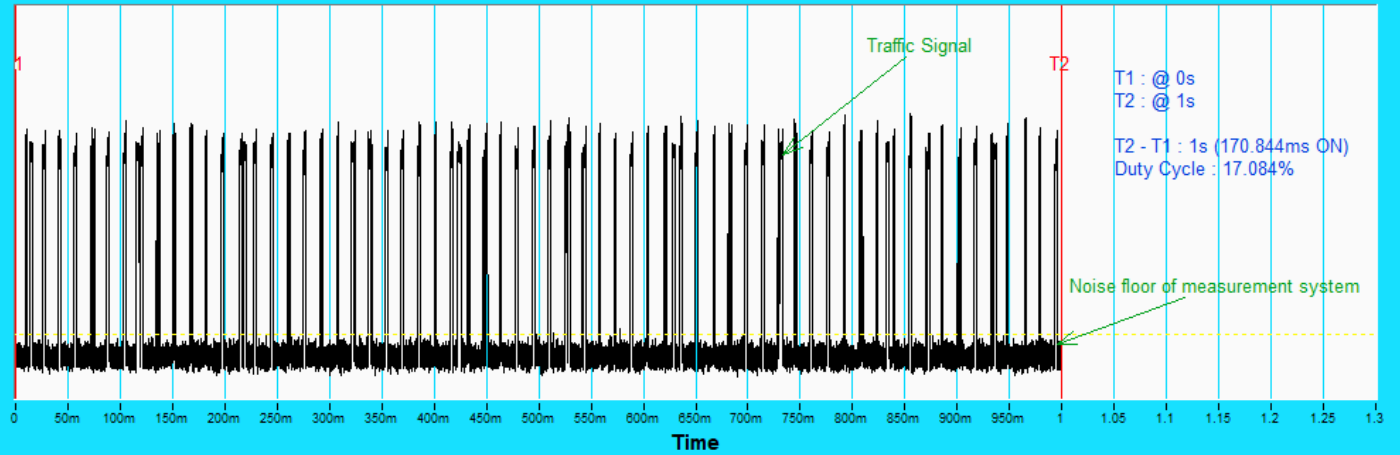


802.11be (EHT20)

Duty Cycle

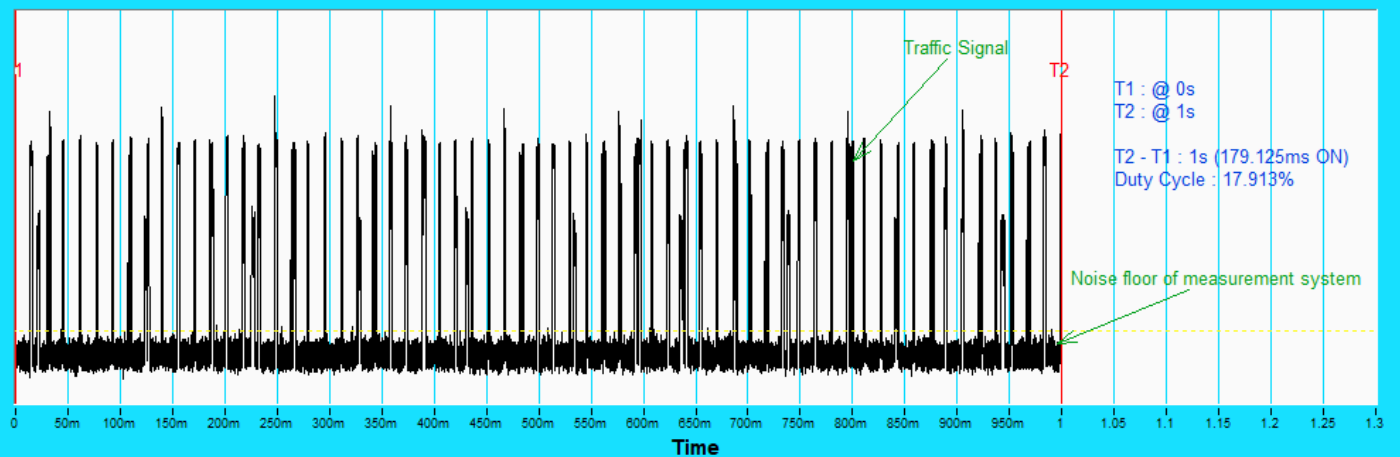

802.11be (EHT40)


Duty Cycle

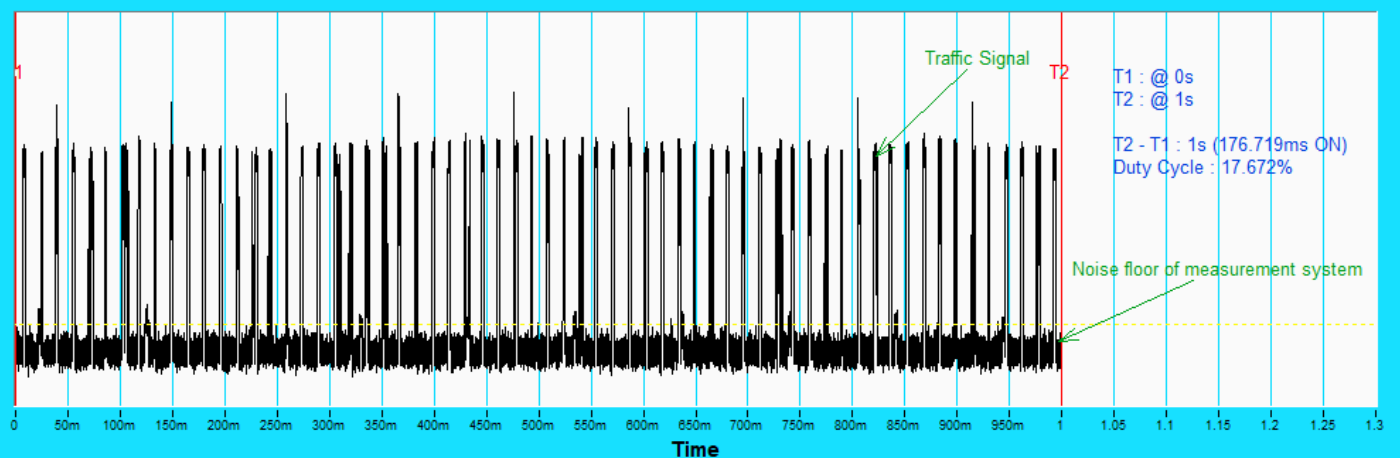

802.11be (EHT80)


Plots of Channel Loading

Duty Cycle

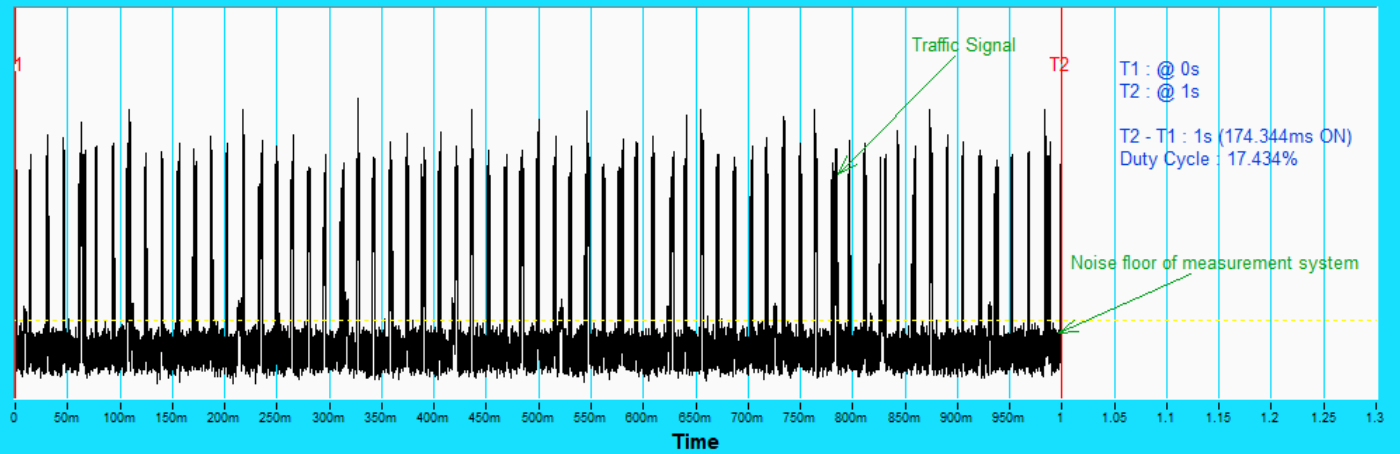

802.11be (EHT160)

Duty Cycle

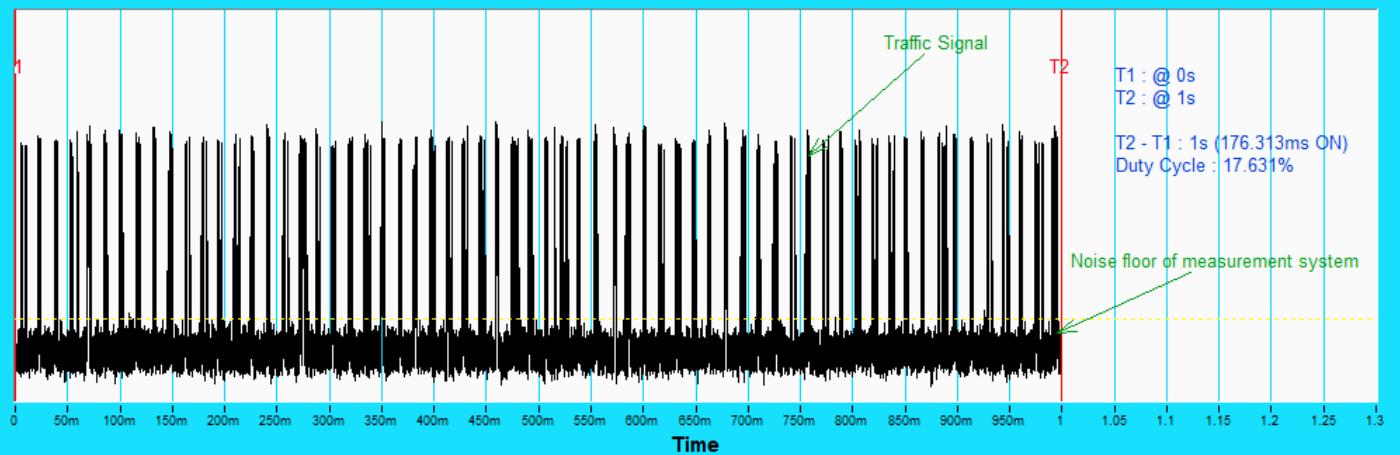


802.11be (EHT240)

6.2.2 Calibration of DFS Detection Threshold Level

The measured channel is chosen from the operating channels of the UUT within the DFS band and using the all bandwidth mode available for the link. The radar signal was the same as transmitted channels, and injected into the antenna of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

Conducted Setup Configuration of Calibration of DFS Detection Threshold Level

The calibrated conducted detection threshold level is set to -64 dBm. The tested level is lower than required level hence it provides margin to the limit.

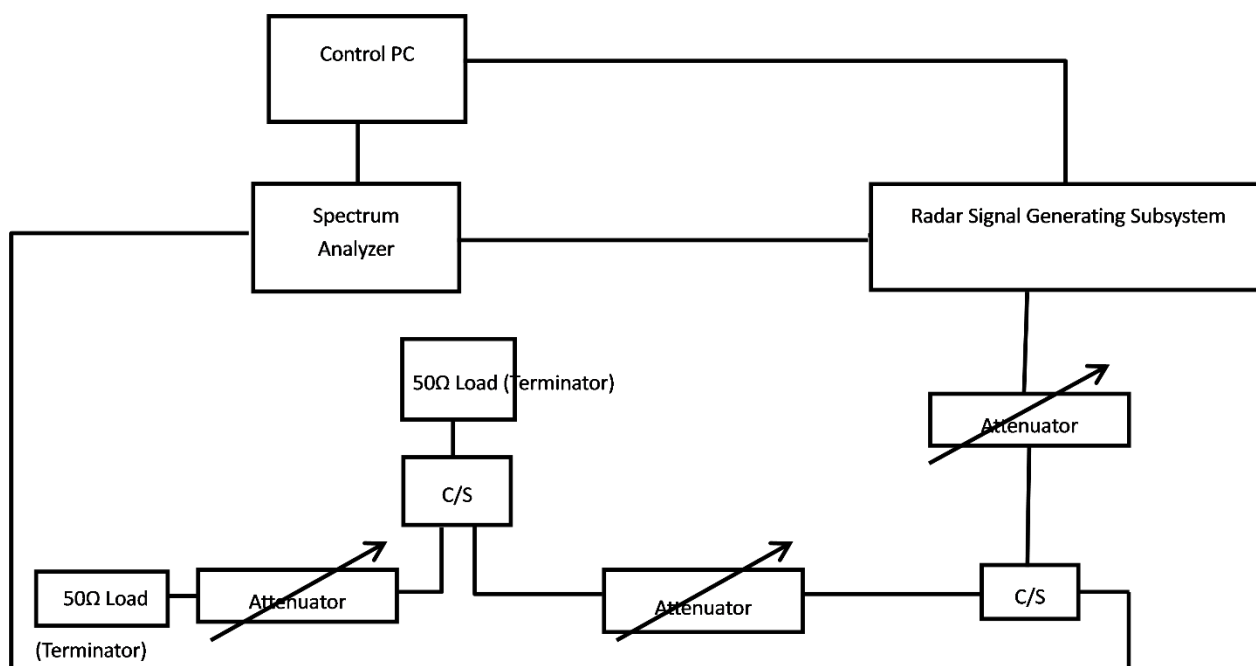

Note: The correction factor has already been compensated by the instrument.

6.2.3 DFS Detection Threshold


Test Mode: Device Operating in Master Mode


The radar test waveforms are injected into the Master.

The antenna net gain is 2.49 dBi.


DFS Detection Threshold = $-64 \text{ dBm} + 2.49 \text{ dBi} = -61.51 \text{ dBm}$

The calibrated conducted detection threshold level is lower than -61.51 dBm .

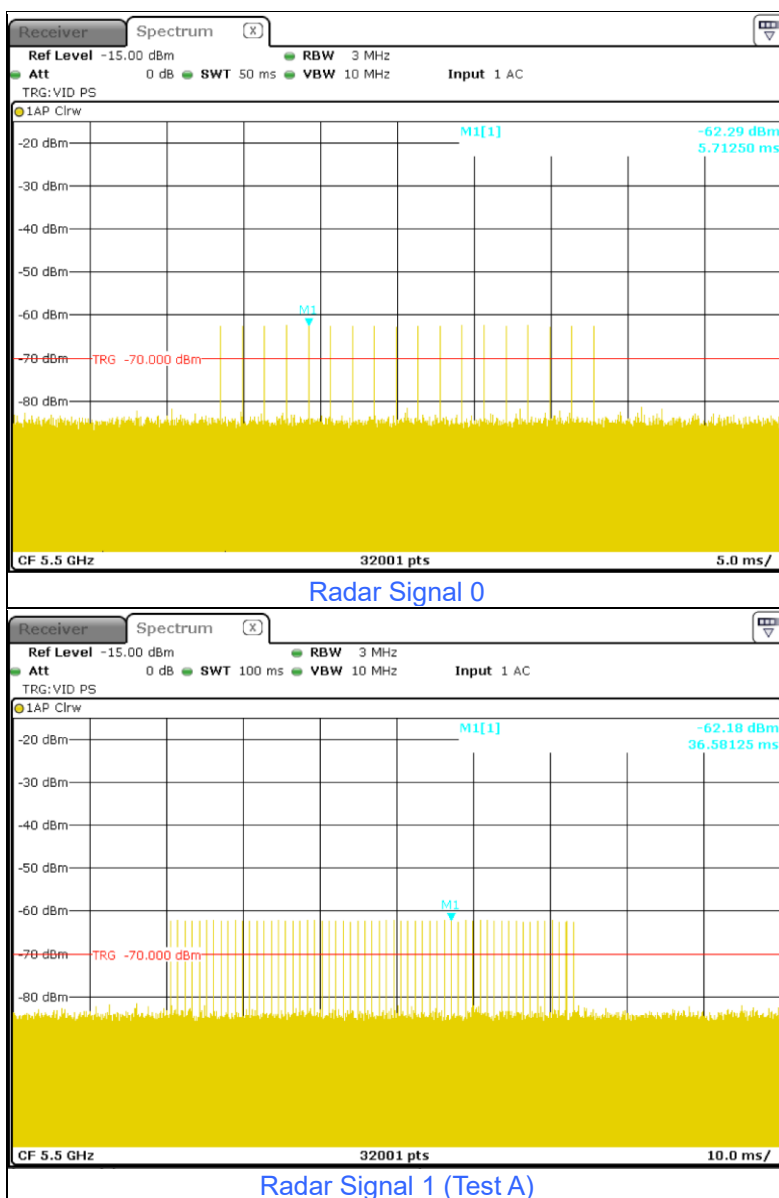


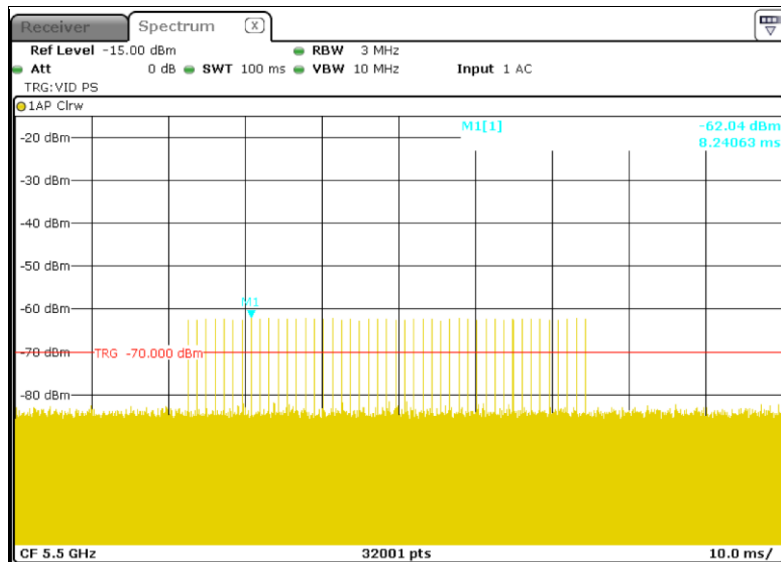


Radar Signal 1 (Test B)

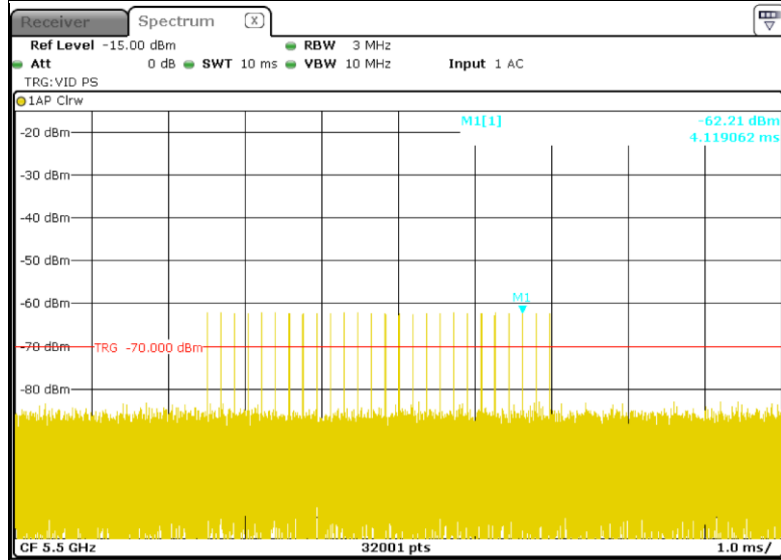


Radar Signal 2

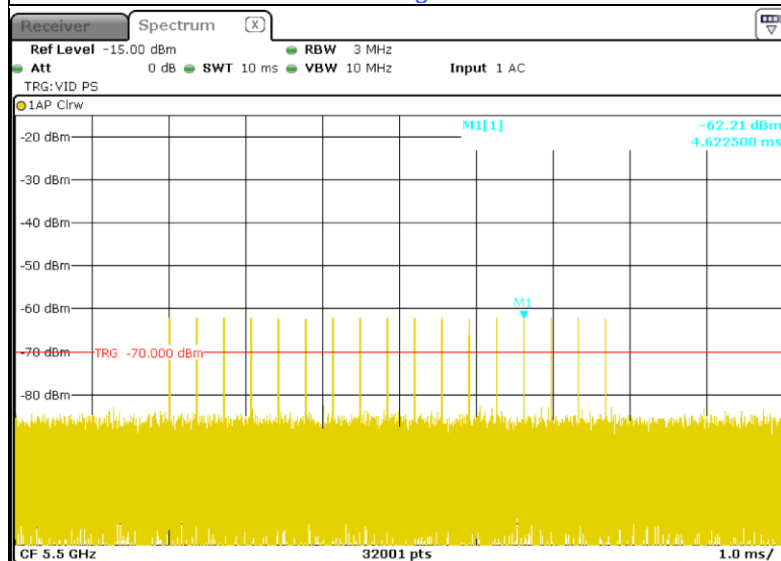

Radar Signal 3

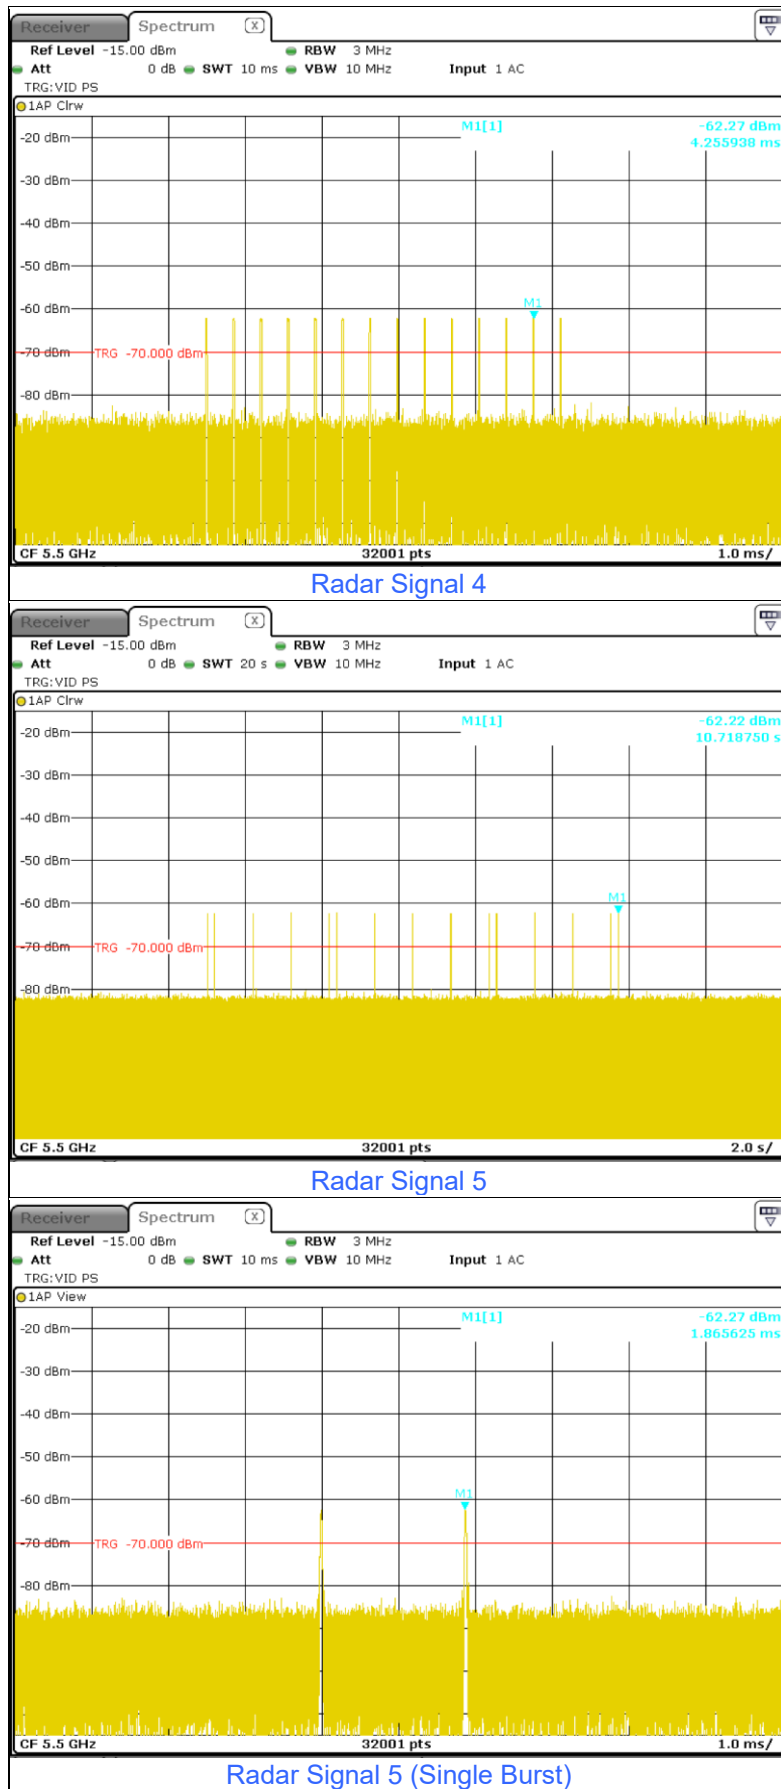

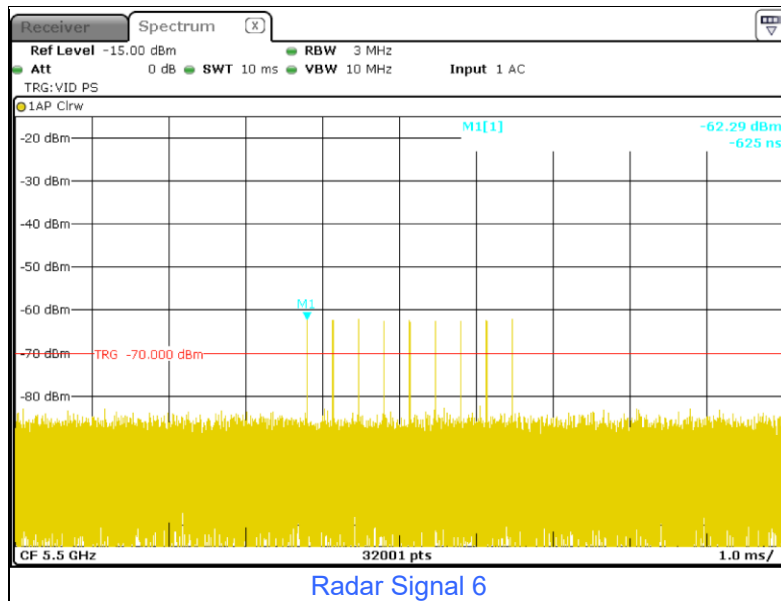

6.2.4 DFS Companion Device

RBE780

Companion Device Information					
Product (Support Unit 1)	Brand	Model No.	FCC ID	Specification	Software/Firmware Version
Orbi 11BE WiFi 7 Tri-band Router	NETGEAR	RBE781	PY325300650	5G Ant gain : 2.49dBi Maximum EIRP : 29.22dBm	OpenWrt 23.05-SNAPSHOT r0-5f4eb28c2 / LuCI SPF12.5_CSU1 branch git-24.299.05775-9650f6c

Note: This device was functioned as a Master device during the DFS test.

Product (Support Unit 2)	Brand	Model No.	FCC ID	Specification	Software/Firmware Version
Orbi 11BE WiFi 7 Tri-band Satellite	NETGEAR	RBE780	PY325300650	5G Ant gain : 2.49dBi Maximum EIRP : 29.22dBm	OpenWrt 23.05-SNAPSHOT r0-5f4eb28c2 / LuCI SPF12.5_CSU1 branch git-24.299.05775-9650f6c

Note: This device was functioned as a Slave device during the DFS test.

RBE781

Companion Device Information					
Product	Brand	Model No.	FCC ID	Specification	Software/Firmware Version
Orbi 11BE WiFi 7 Tri-band Satellite	NETGEAR	RBE780	PY325300650	5G Ant gain : 2.49dBi Maximum EIRP : 29.22dBm	OpenWrt 23.05-SNAPSHOT r0-5f4eb28c2 / LuCI SPF12.5_CSU1 branch git-24.299.05775-9650f6c

Note: This device was functioned as a Slave device during the DFS test.


7 Test Results of Test Item

7.1 U-NII Detection Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih & Neil Yeh
---------------------------	--------------	------------	----------------------

For 802.11be (EHT20)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5500 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 19.07 MHz Detection bandwidth (5510 MHz (FH) – 5490 MHz (FL)): 20 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Percentage of Successful Detection	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

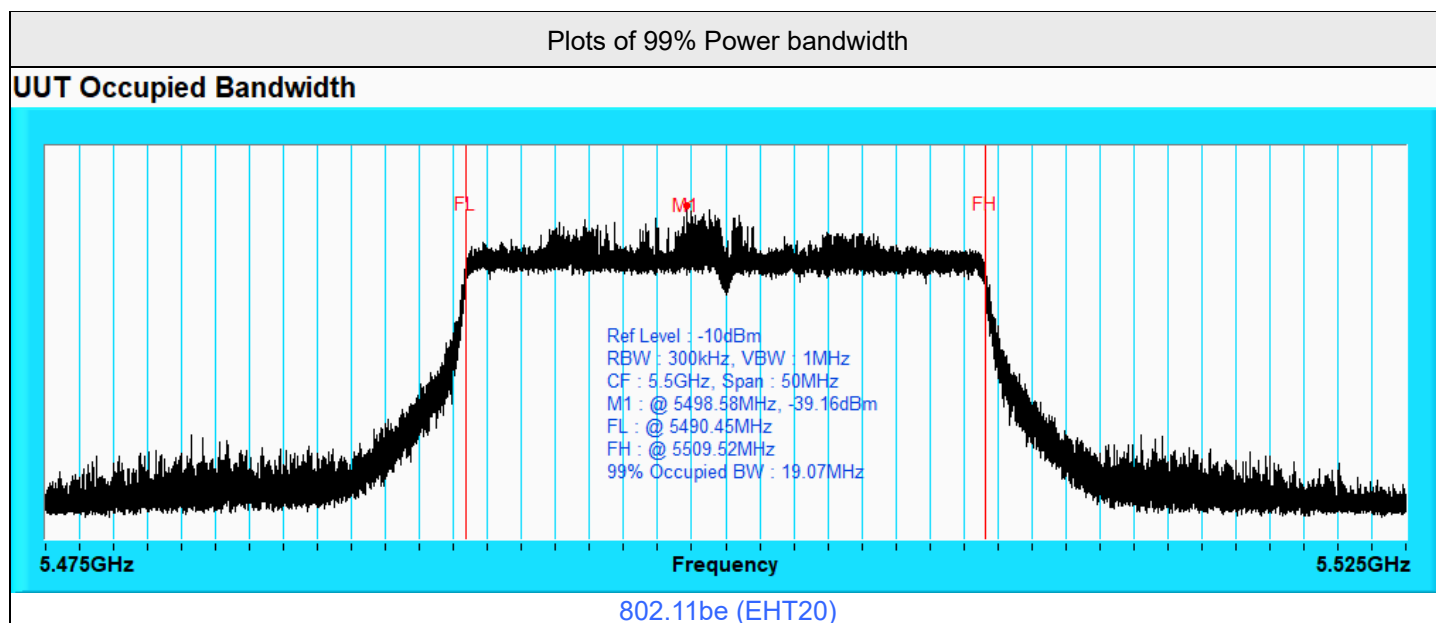

802.11be (EHT40)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5510 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 38.28 MHz

Detection bandwidth (5530 MHz (FH) – 5490 MHz (FL)): 40 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

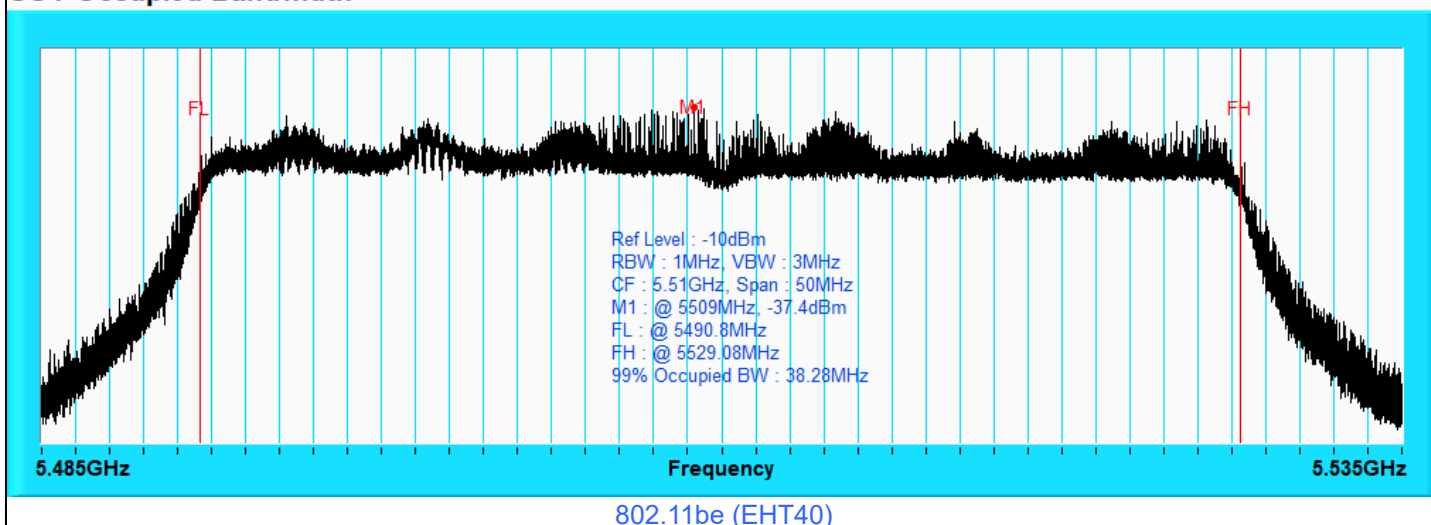

802.11be (EHT80)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5530 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 77.42 MHz

Detection bandwidth (5570 MHz (FH) – 5490 MHz (FL)): 80 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

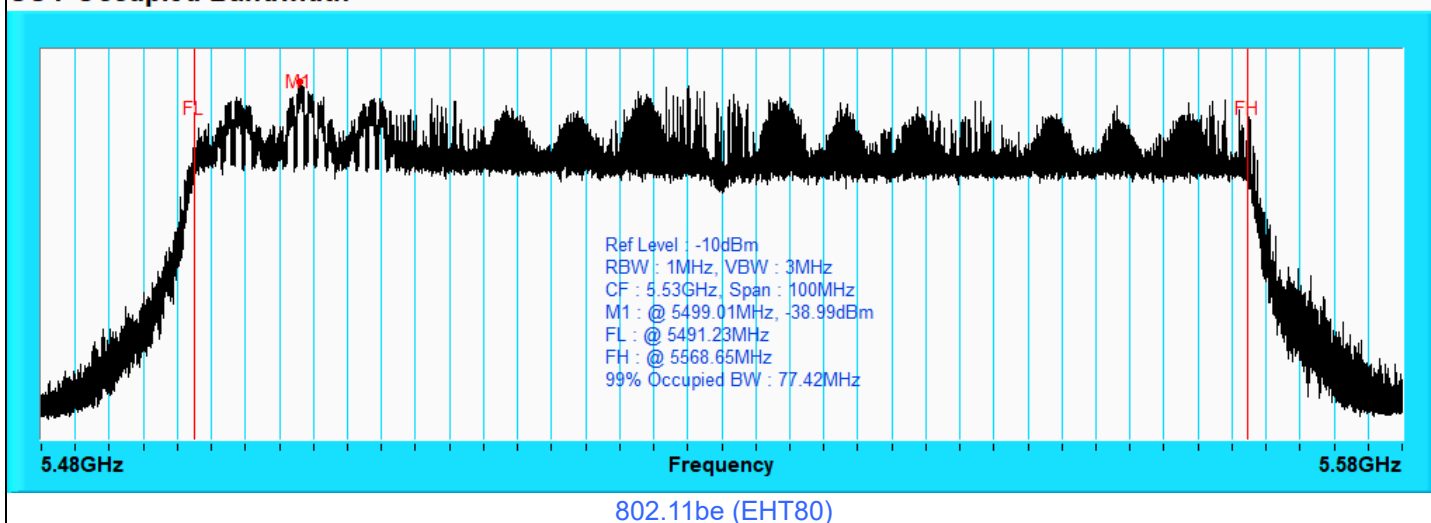

802.11be (EHT160) CH50

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5250 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 156.35 MHz


Detection bandwidth (5330 MHz (FH) – 5250 MHz (FL)): 80 MHz

(160 MHz channel (5250 MHz) straddle between 5150 ~ 5250 MHz and 5250 ~ 5350 MHz, the DFS ability is necessary in 5250 ~ 5350 MHz, therefore DFS detection bandwidth start from 5250 MHz for 802.11be (EHT160) mode.)

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5250 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5255	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5260	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5265	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5270	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5275	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5280	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5285	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5290	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5295	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5300	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5305	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5310	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5315	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5320	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5325	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5330 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

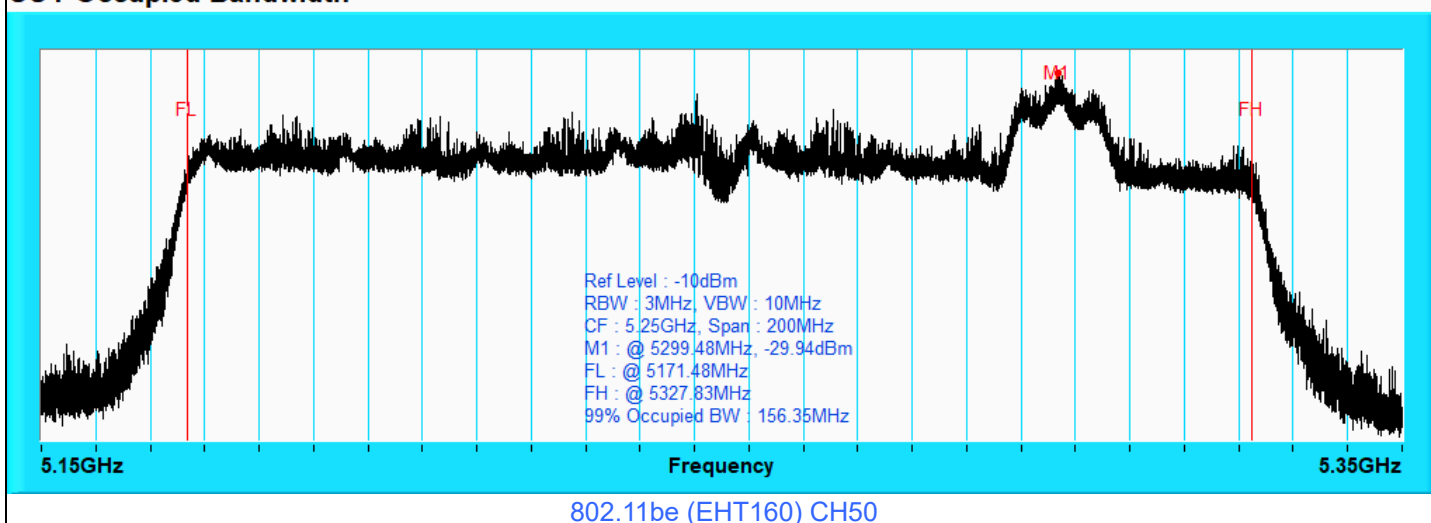

802.11be (EHT160) CH114

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5570 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 155.42 MHz

Detection bandwidth (5650 MHz (FH) – 5490 MHz (FL)): 160 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5650 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

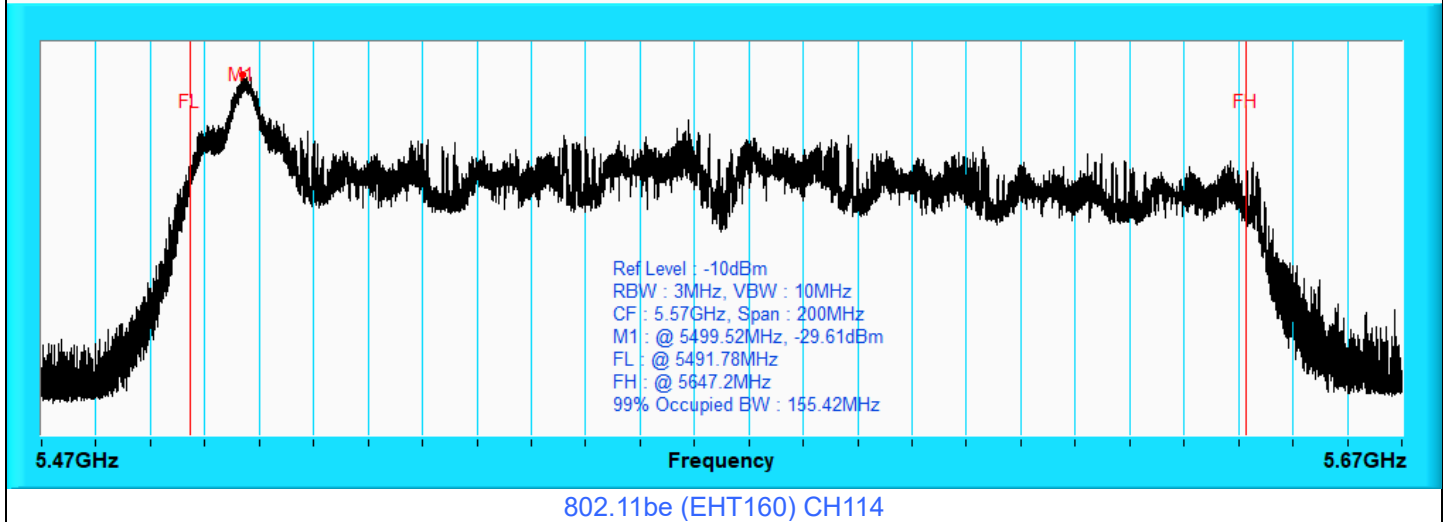

802.11be (EHT240)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5610 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 234.05 MHz

Detection bandwidth (5725 MHz (FH) – 5490 MHz (FL)): 235 MHz


(240 MHz channel (5610 MHz) straddle between 5470 ~ 5725 MHz and 5725 ~ 5850 MHz, the DFS ability is necessary in 5470 ~ 5725 MHz, therefore DFS detection bandwidth end of 5725 MHz for 802.11be (EHT240) mode.)

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5650	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5655	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

5660	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5665	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5670	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5675	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5680	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5685	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5690	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5695	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5700	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5705	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5710	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5715	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5720	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5725 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

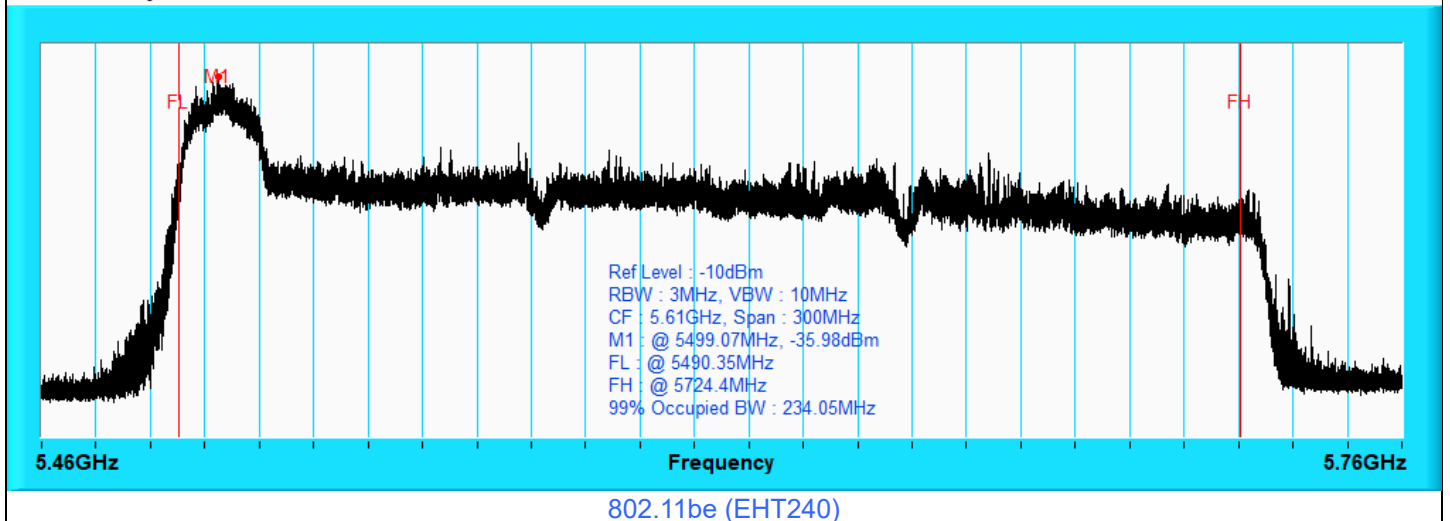


7.2 Channel Availability Check Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih & Neil Yeh
---------------------------	--------------	------------	----------------------


If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.

Timing of Radar Signal	Observation	
	EUT	Spectrum Analyzer
Within 0 to 6 seconds	Detected	No transmissions
Within 54 to 60 seconds	Detected	No transmissions

Note: Worst case channel for final "Channel Availability Check" test.

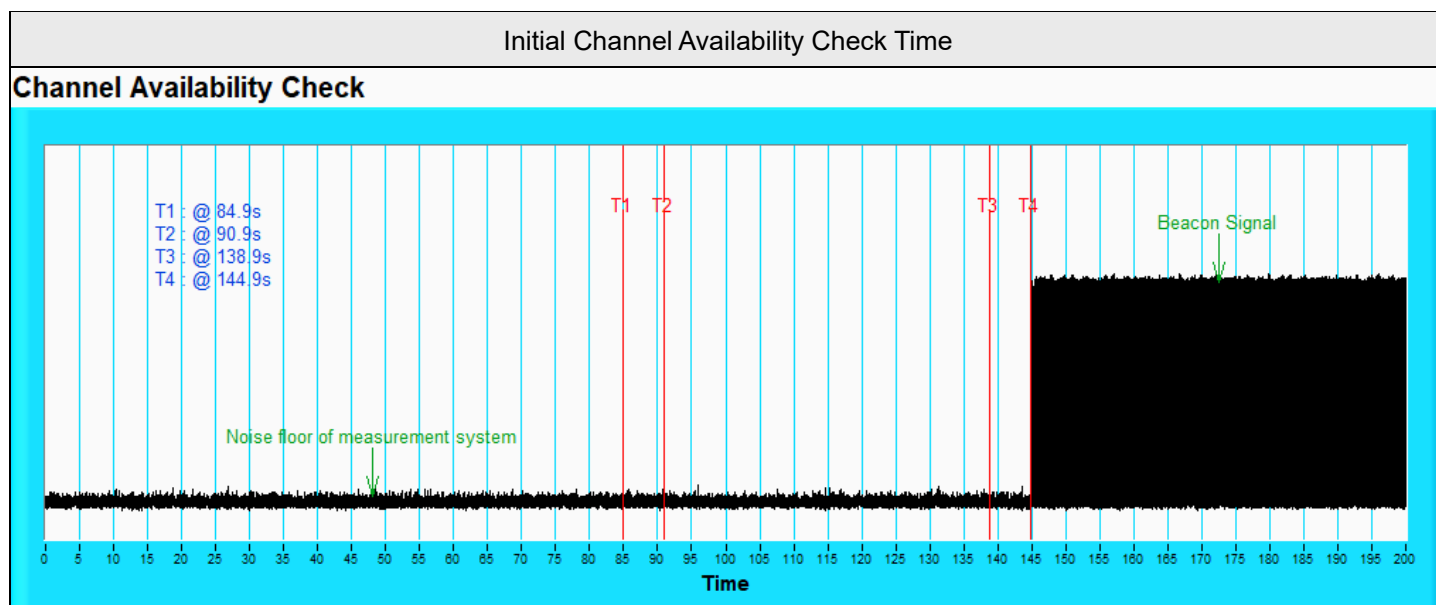


Note: T1 denotes the end of power-up time period is 84.9th second. T4 denotes the end of Channel Availability Check time is 144.9th second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

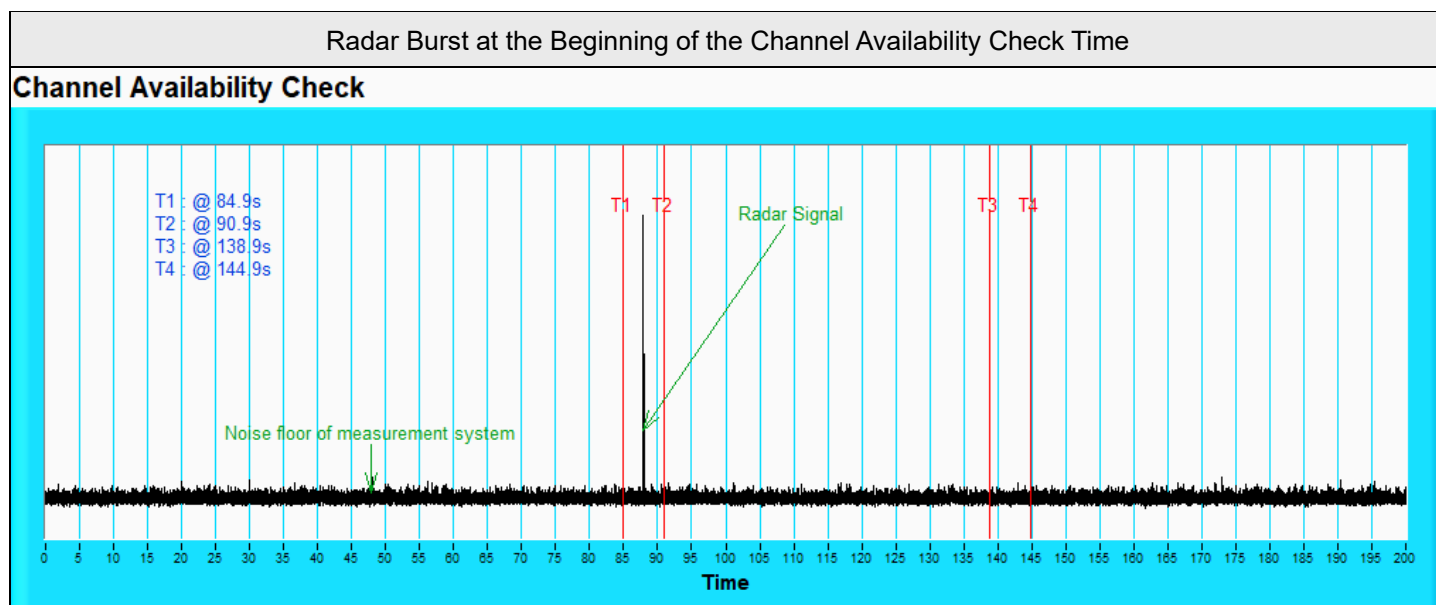

Note: T1 denotes the end of power-up time period is 84.9th second. T2 denotes 90.9th second and the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 144.9th second.

Radar Burst at the End of the Channel Availability Check Time


Channel Availability Check

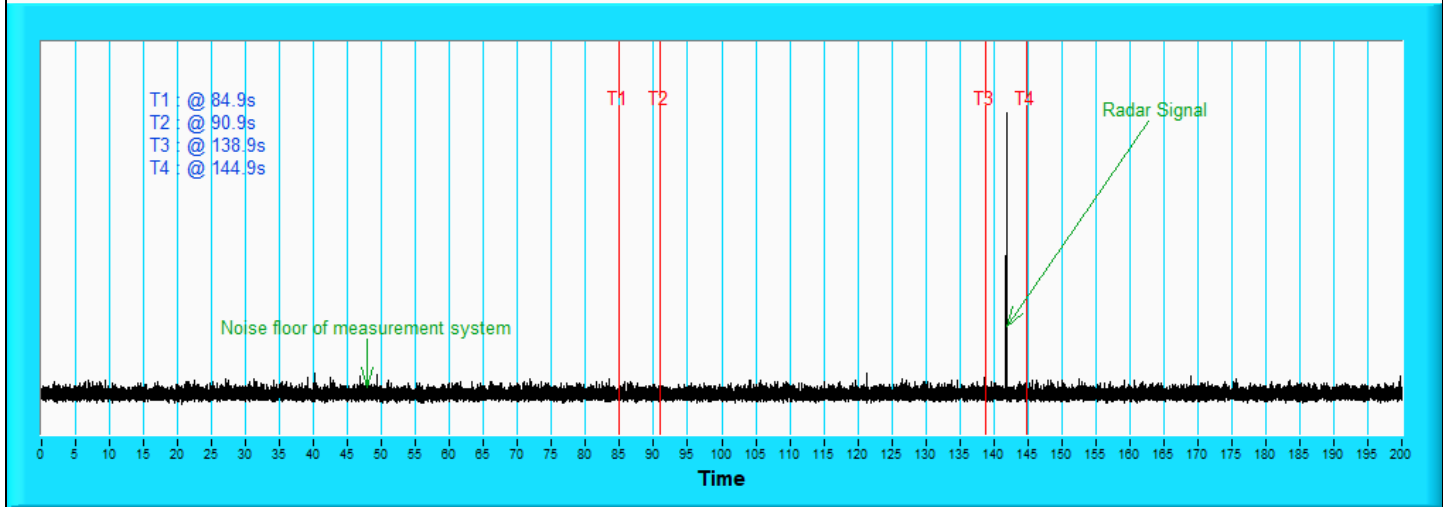


Note: T1 denotes the end of power-up time period is 84.9th second. T3 denotes 138.9th second and the radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence. T4 denotes the 144.9th second.

7.3 Channel Closing Transmission and Channel Move Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih & Neil Yeh
---------------------------	--------------	------------	----------------------

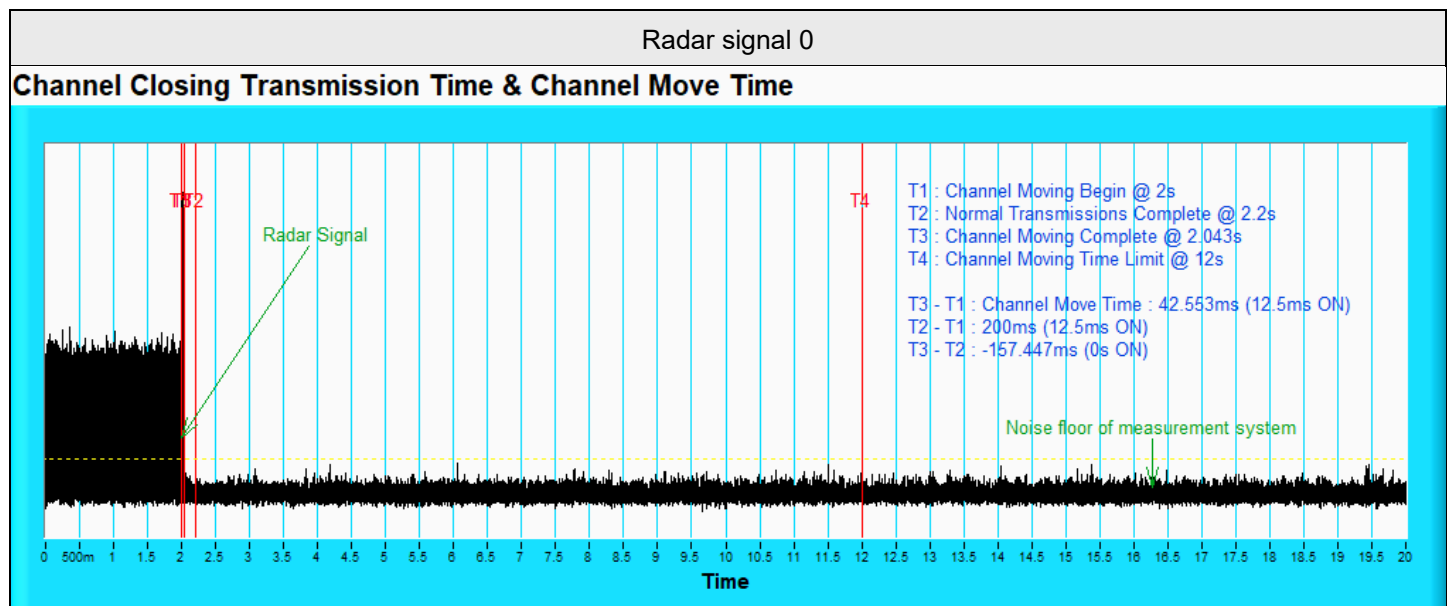


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

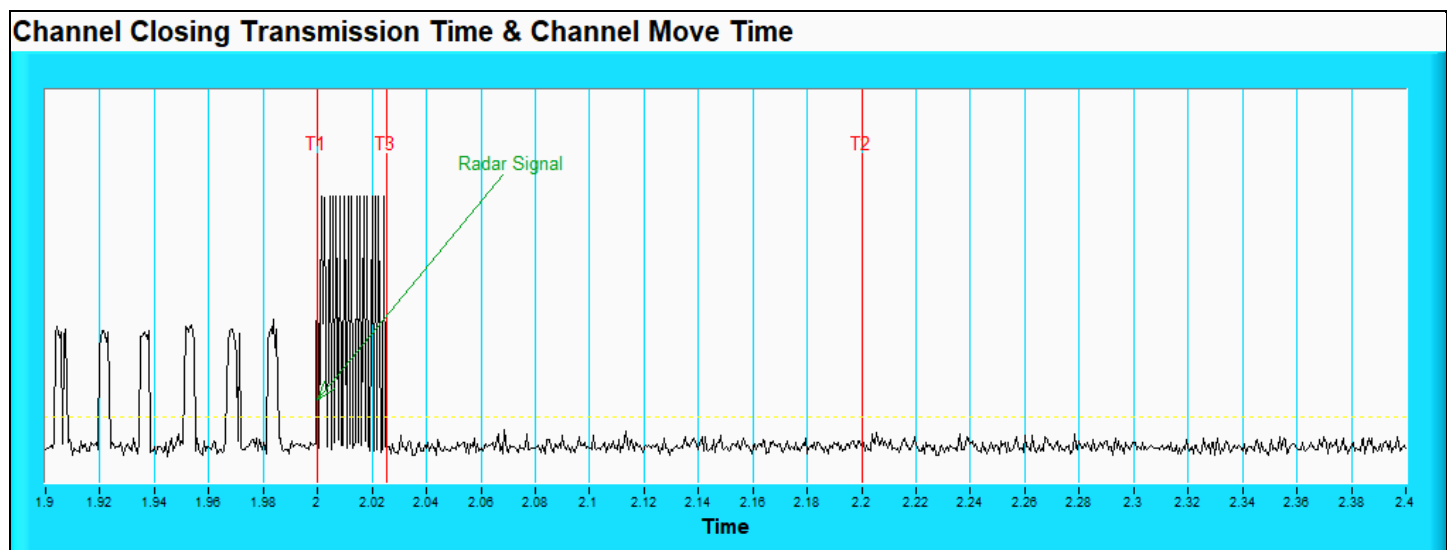

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 1

Channel Closing Transmission Time & Channel Move Time

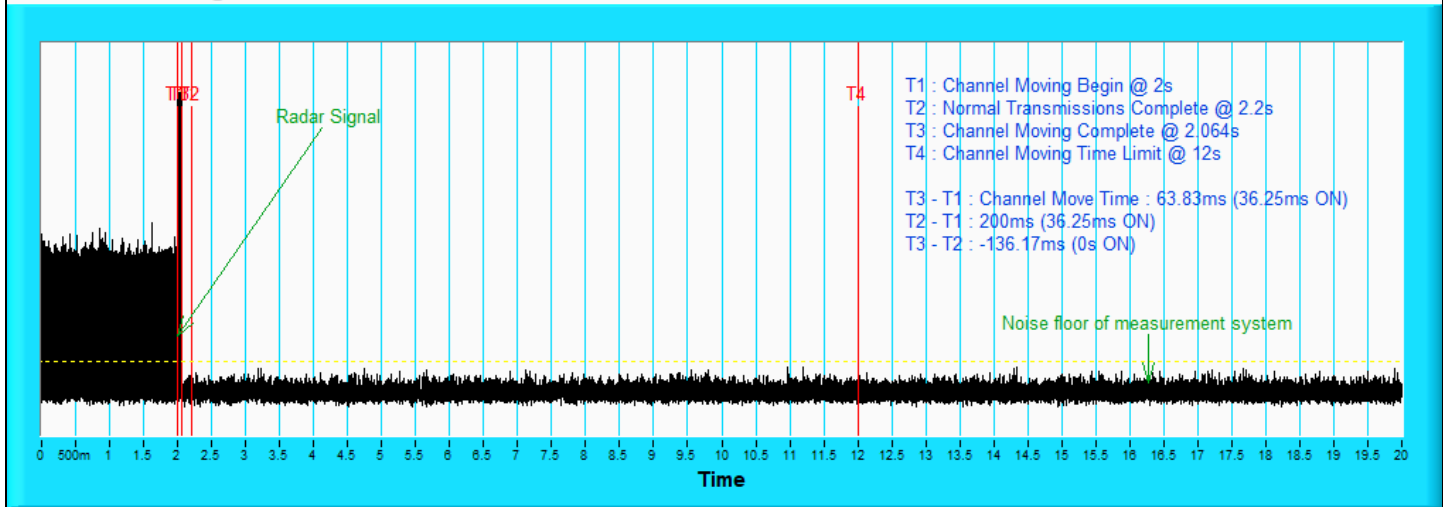

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

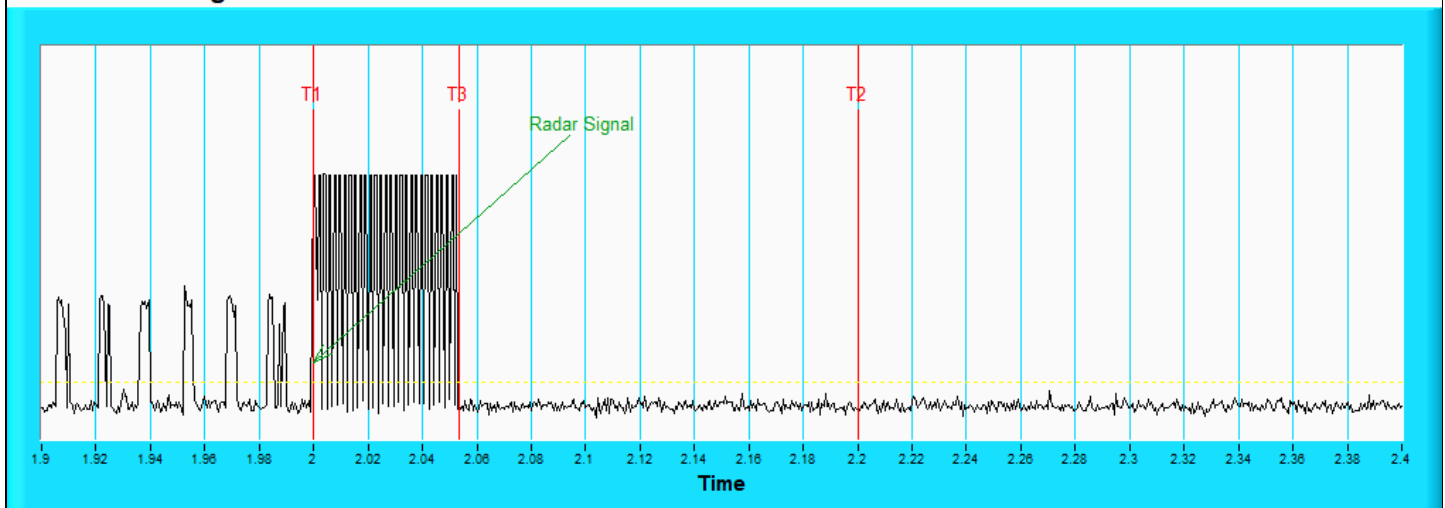

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 2

Channel Closing Transmission Time & Channel Move Time

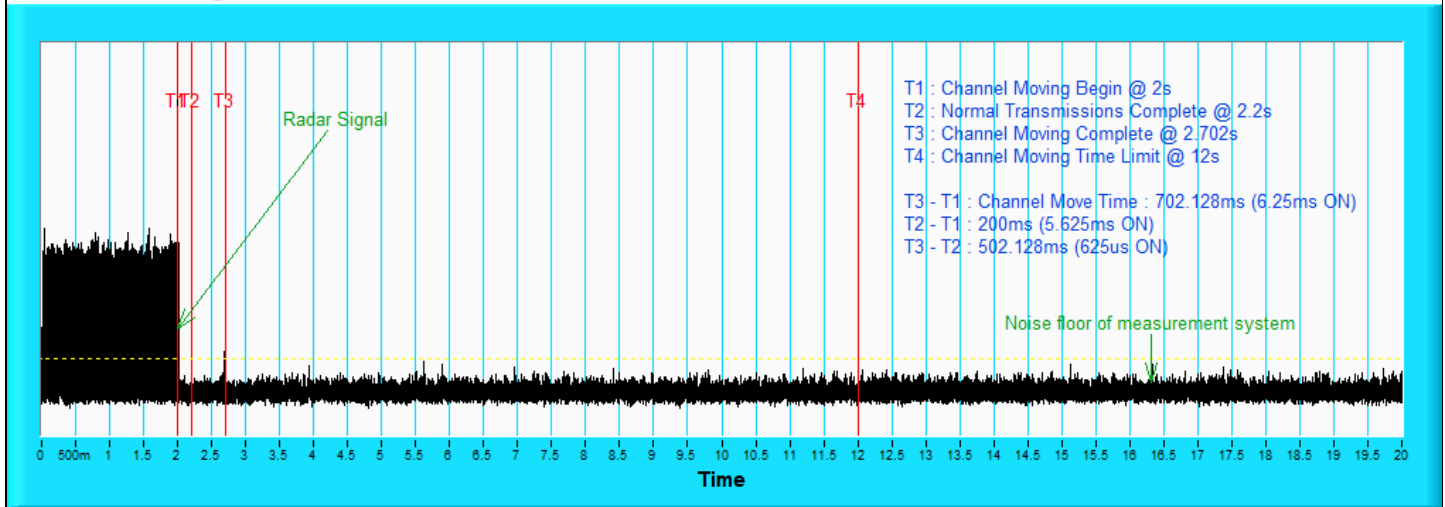

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

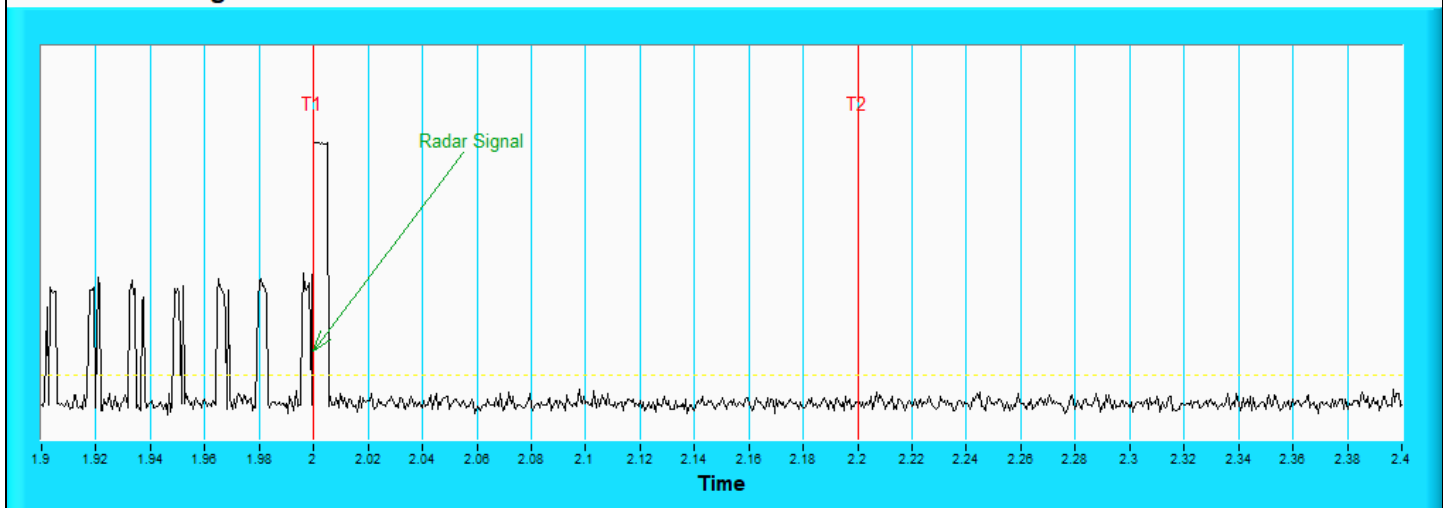

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 3

Channel Closing Transmission Time & Channel Move Time

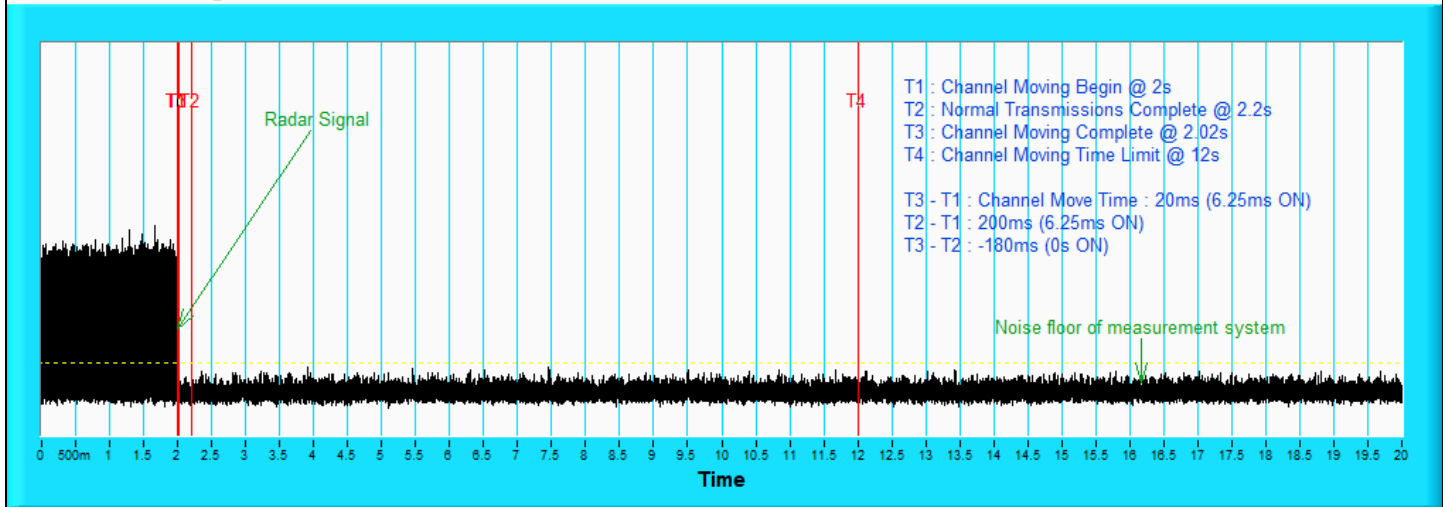

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

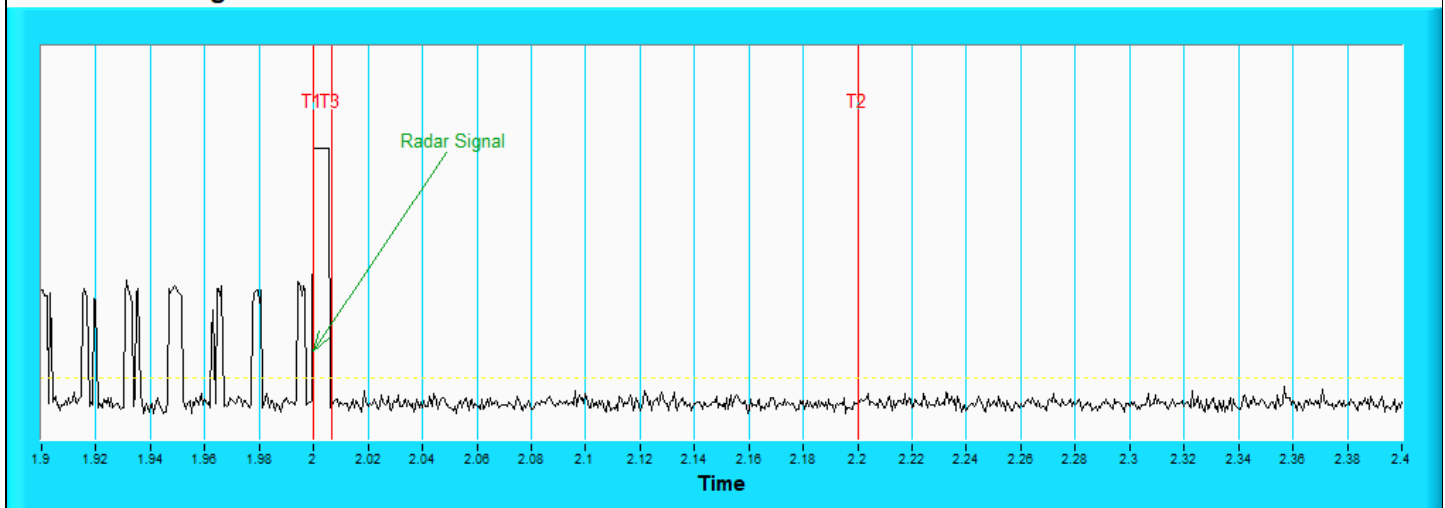

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 4

Channel Closing Transmission Time & Channel Move Time

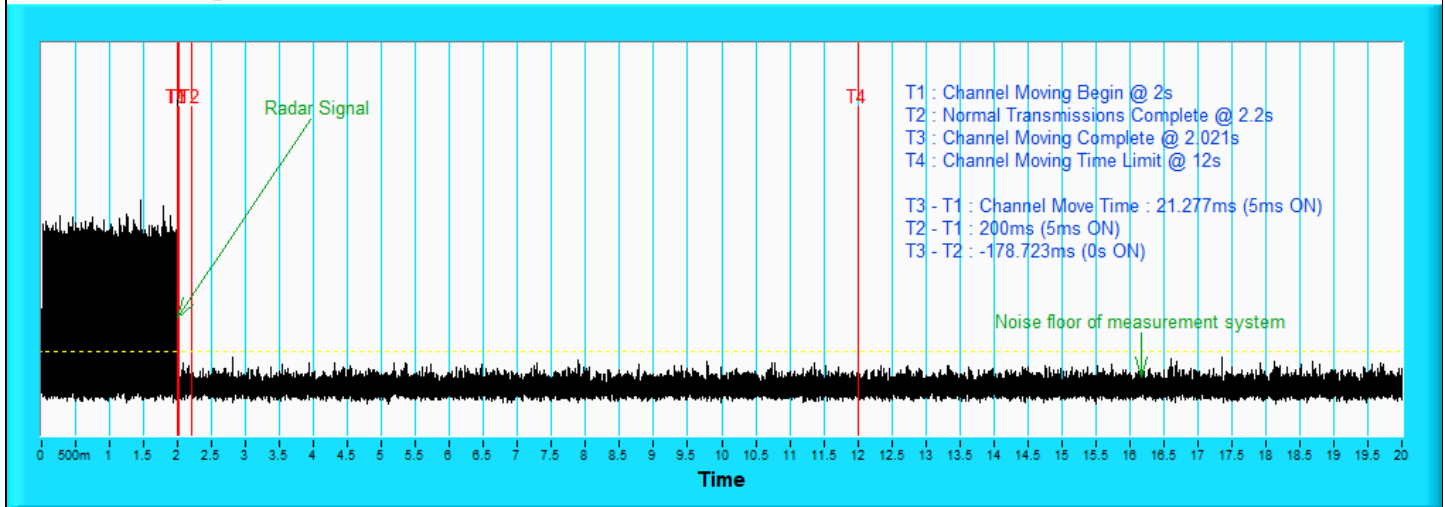

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Channel Closing Transmission Time & Channel Move Time

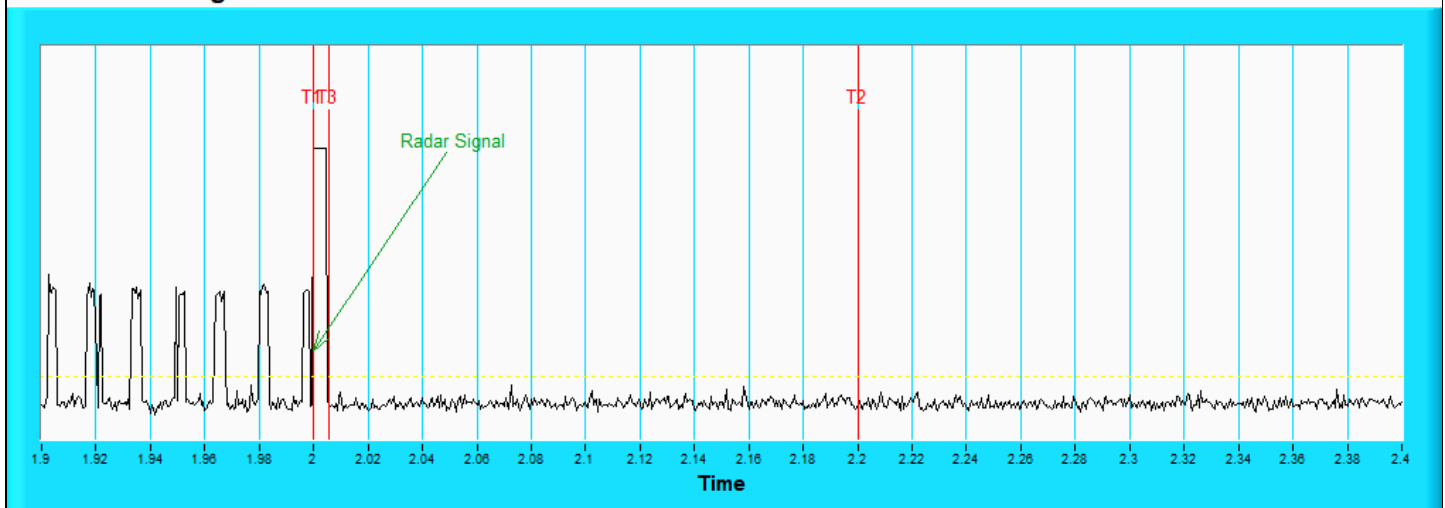


Note: Zoom in of the first 500 ms after radar signal applied.

7.4 Non-Occupancy Period


Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih & Neil Yeh
---------------------------	--------------	------------	----------------------

For Associated Test

1) Test results demonstrating an associated client link is established with the master on a test frequency.

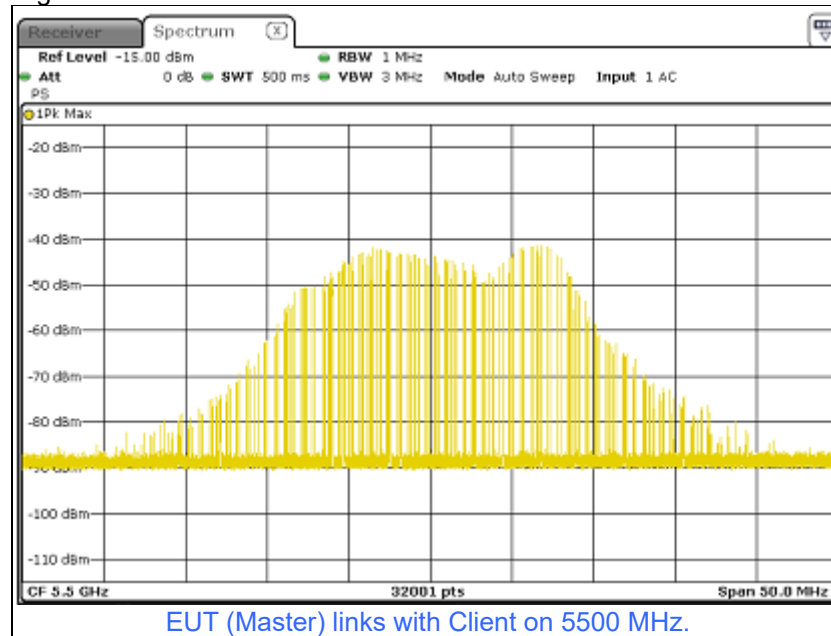


2) The Master and DFS-certified client device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

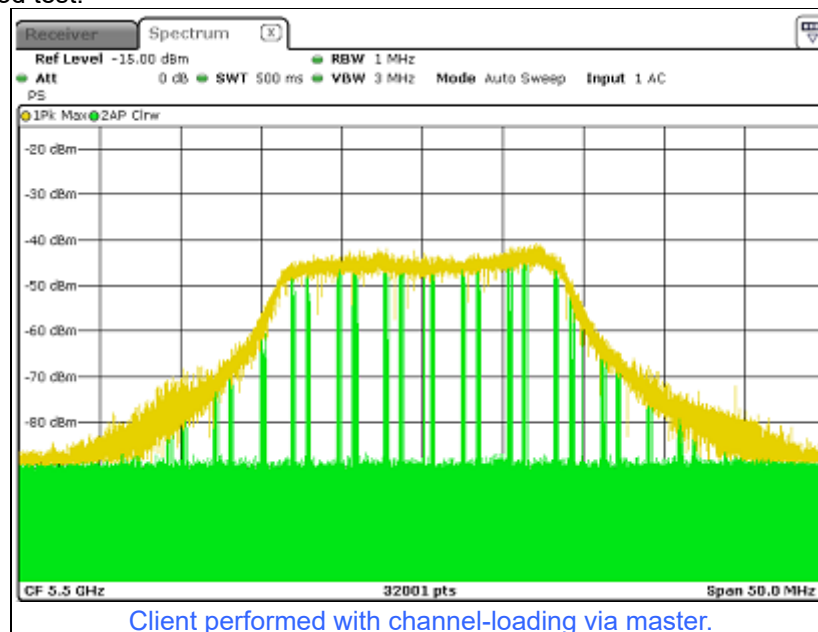

3). The device transmits one type of radar as specified in the DFS Order.

	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 0	1.0	1428.0	18	25704.0
Download	1	Type 0	1.0	1428.0	18	25704.0
Download	2	Type 0	1.0	1428.0	18	25704.0
Download	3	Type 0	1.0	1428.0	18	25704.0
Download	4	Type 0	1.0	1428.0	18	25704.0
Download	5	Type 0	1.0	1428.0	18	25704.0
Download	6	Type 0	1.0	1428.0	18	25704.0
Download	7	Type 0	1.0	1428.0	18	25704.0
Download	8	Type 0	1.0	1428.0	18	25704.0
Download	9	Type 0	1.0	1428.0	18	25704.0
Download	10	Type 0	1.0	1428.0	18	25704.0
Download	11	Type 0	1.0	1428.0	18	25704.0
Download	12	Type 0	1.0	1428.0	18	25704.0
Download	13	Type 0	1.0	1428.0	18	25704.0
Download	14	Type 0	1.0	1428.0	18	25704.0
Download	15	Type 0	1.0	1428.0	18	25704.0
Download	16	Type 0	1.0	1428.0	18	25704.0


DFS Test Tool

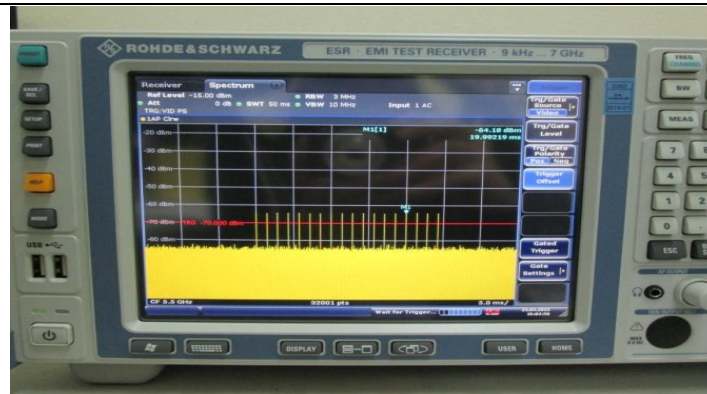

Radar 0 is used to test during DFS test

- 4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
 Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
 5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

Non - Occupancy Period

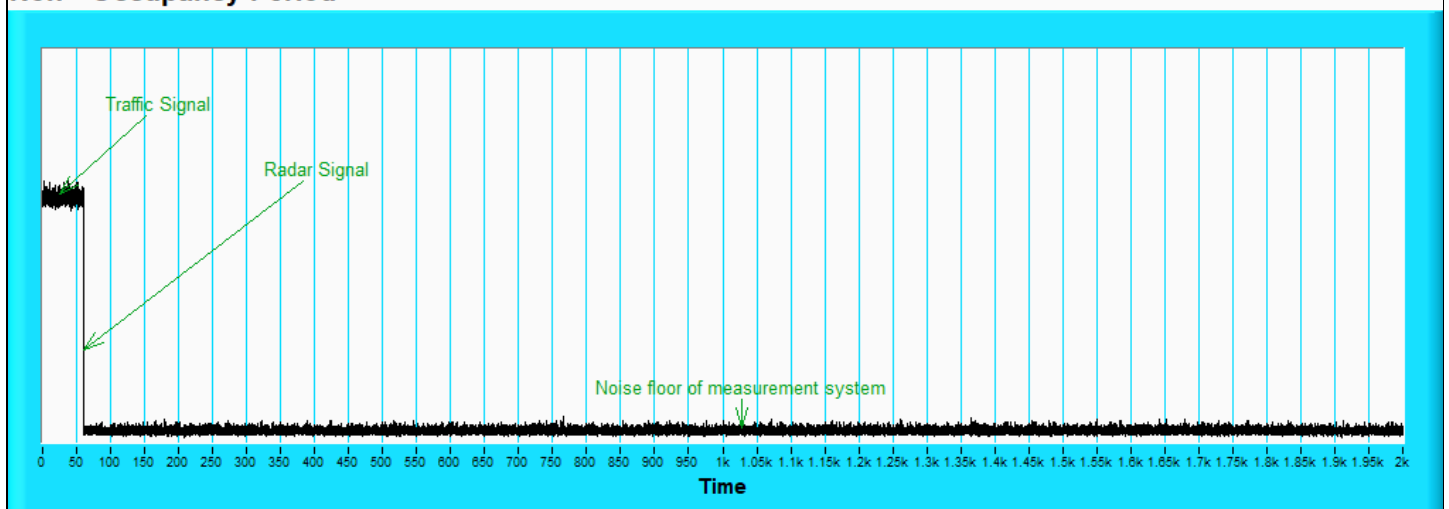

7.5 Statistical Performance Check

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih & Neil Yeh
---------------------------	--------------	------------	----------------------

RBE780

For EasyMesh Mode Validated by Performing a Statistical Performance Check

Modulation	Operation Frequency (MHz)	Radar Type	Number of Trials	Percentage of Successful Detection	Minimum Percentage of Successful Detection	Test Result
802.11be (EHT80)	5530	1	30	100.0%	80.0%	Pass

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5490	18	1165.5	62	858	Yes
2	5492	20	1113.6	59	898	Yes
3	5508	8	1519.8	81	658	Yes
4	5559	19	1139	61	878	Yes
5	5504	6	1618.1	86	618	Yes
6	5493	12	1355	72	738	Yes
7	5496	5	1672.2	89	598	Yes
8	5525	7	1567.4	83	638	Yes
9	5498	22	1066.1	57	938	Yes
10	5501	2	1858.7	99	538	Yes
11	5500	9	1474.9	78	678	Yes
12	5524	14	1285.3	68	778	Yes
13	5502	21	1089.3	58	918	Yes
14	5551	10	1432.7	76	698	Yes
15	5555	3	1792.1	95	558	Yes
16	5534	-	327.8	18	3051	Yes
17	5515	-	425.4	23	2351	Yes
18	5552	-	1085.8	58	921	Yes
19	5506	-	643.1	34	1555	Yes
20	5509	-	386.1	21	2590	Yes
21	5521	-	635.7	34	1573	Yes
22	5511	-	1733.1	92	577	Yes
23	5566	-	479.2	26	2087	Yes
24	5535	-	1003	53	997	Yes
25	5540	-	424.1	23	2358	Yes
26	5554	-	638.6	34	1566	Yes
27	5516	-	412.5	22	2424	Yes
28	5517	-	501.5	27	1994	Yes
29	5570	-	520	28	1923	Yes
30	5495	-	1412.4	75	708	Yes

Detection Rate: 100%

RBE781

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih & Neil Yeh
---------------------------	--------------	------------	----------------------

Radar Type	Number of Trials (Times)	Percentage of Successful Detection						Minimum Percentage of Successful Detection	Test Result
		802.11be (EHT20)	802.11be (EHT40)	802.11be (EHT80)	802.11be (EHT160) CH50	802.11be (EHT160) CH114	802.11be (EHT240)		
1	30	100.0%	100.0%	100.0%	100.0%	100.0%	96.7%	60%	Pass
2	30	96.7%	90.0%	100.0%	100.0%	96.7%	90.0%	60%	Pass
3	30	100.0%	96.7%	86.7%	83.3%	83.3%	80.0%	60%	Pass
4	30	86.7%	86.7%	86.7%	83.3%	76.7%	70.0%	60%	Pass
Aggregate (Radar Types 1 - 4)		95.9%	93.4%	93.4%	91.7%	89.2%	84.2%	80%	Pass
5	30	100.0%	96.7%	96.7%	100.0%	100.0%	96.7%	80%	Pass
6	30	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	70%	Pass

802.11be (EHT20) 5500MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5490	22	1066.1	57	938	Yes
2	5503	10	1432.7	76	698	Yes
3	5498	6	1618.1	86	618	Yes
4	5491	2	1858.7	99	538	Yes
5	5493	19	1139	61	878	Yes
6	5495	23	326.2	18	3066	Yes
7	5505	7	1567.4	83	638	Yes
8	5506	21	1089.3	58	918	Yes
9	5504	17	1193.3	63	838	Yes
10	5508	18	1165.5	62	858	Yes
11	5510	15	1253.1	67	798	Yes
12	5492	11	1392.8	74	718	Yes
13	5500	4	1730.1	92	578	Yes
14	5497	5	1672.2	89	598	Yes
15	5499	3	1792.1	95	558	Yes
16	5507	-	394.3	21	2536	Yes
17	5494	-	1035.2	55	966	Yes
18	5501	-	1209.2	64	827	Yes
19	5509	-	399.8	22	2501	Yes
20	5496	-	385.4	21	2595	Yes
21	5502	-	897.7	48	1114	Yes
22	5500	-	768	41	1302	Yes
23	5495	-	328.4	18	3045	Yes
24	5498	-	615.8	33	1624	Yes
25	5493	-	347.5	19	2878	Yes
26	5509	-	973.7	52	1027	Yes
27	5491	-	402.4	22	2485	Yes
28	5501	-	625	33	1600	Yes
29	5510	-	853.2	46	1172	Yes
30	5496	-	849.6	45	1177	Yes
						Detection Rate: 100%

802.11be (EHT20) 5500MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5500	26	3.2	179	Yes
2	5494	23	1.1	207	Yes
3	5508	24	2.1	230	Yes
4	5491	29	4.8	200	Yes
5	5504	28	3.9	214	Yes
6	5490	26	2.9	222	Yes
7	5509	26	3.2	204	Yes
8	5510	25	2.5	192	Yes
9	5498	26	3.1	164	Yes
10	5497	23	1.2	156	Yes
11	5506	27	3.9	210	Yes
12	5501	29	4.6	201	No
13	5507	26	3.2	162	Yes
14	5499	25	2.2	197	Yes
15	5502	29	4.5	163	Yes
16	5503	26	3	203	Yes
17	5495	29	5	168	Yes
18	5492	25	2.4	217	Yes
19	5505	26	2.9	191	Yes
20	5496	25	2.3	166	Yes
21	5493	27	3.7	150	Yes
22	5499	25	2.2	176	Yes
23	5504	29	4.9	195	Yes
24	5508	26	2.9	202	Yes
25	5491	25	2.5	178	Yes
26	5494	23	1.1	206	Yes
27	5500	27	3.8	155	Yes
28	5493	29	4.7	157	Yes
29	5492	25	2.4	224	Yes
30	5510	28	4.2	159	Yes
					Detection Rate: 96.7%

802.11be (EHT20) 5500MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5506	17	8.2	355	Yes
2	5493	16	6.1	487	Yes
3	5492	16	7.1	344	Yes
4	5498	18	9.8	288	Yes
5	5499	18	8.9	230	Yes
6	5490	17	7.9	432	Yes
7	5496	17	8.2	207	Yes
8	5494	17	7.5	443	Yes
9	5502	17	8.1	439	Yes
10	5509	16	6.2	223	Yes
11	5504	18	8.9	208	Yes
12	5510	18	9.6	463	Yes
13	5505	17	8.2	441	Yes
14	5503	16	7.2	323	Yes
15	5497	18	9.5	297	Yes
16	5501	17	8	412	Yes
17	5495	18	10	324	Yes
18	5500	17	7.4	271	Yes
19	5508	17	7.9	349	Yes
20	5507	16	7.3	409	Yes
21	5491	18	8.7	373	Yes
22	5505	16	7.2	254	Yes
23	5494	18	9.9	274	Yes
24	5495	17	7.9	278	Yes
25	5498	17	7.5	317	Yes
26	5499	16	6.1	260	Yes
27	5503	18	8.8	211	Yes
28	5492	18	9.7	272	Yes
29	5500	17	7.4	264	Yes
30	5506	18	9.2	284	Yes
					Detection Rate: 100%

802.11be (EHT20) 5500MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5499	14	16	355	Yes
2	5504	12	11.3	487	Yes
3	5492	13	13.5	344	No
4	5493	16	19.4	288	Yes
5	5494	15	17.5	230	Yes
6	5510	14	15.3	432	Yes
7	5496	14	15.9	207	Yes
8	5491	13	14.3	443	Yes
9	5508	14	15.8	439	No
10	5501	12	11.5	223	Yes
11	5500	15	17.4	208	Yes
12	5507	16	19	463	Yes
13	5497	14	16	441	Yes
14	5498	13	13.8	323	Yes
15	5505	16	18.9	297	Yes
16	5506	14	15.5	412	Yes
17	5490	16	19.9	324	Yes
18	5509	13	14.1	271	Yes
19	5495	14	15.2	349	Yes
20	5503	13	13.8	409	Yes
21	5502	15	17.1	373	No
22	5490	13	13.8	254	Yes
23	5499	16	19.8	274	Yes
24	5500	14	15.3	278	Yes
25	5505	13	14.5	317	Yes
26	5503	12	11.3	260	Yes
27	5493	15	17.3	211	No
28	5507	16	19.2	272	Yes
29	5496	13	14.2	264	Yes
30	5508	15	18.2	284	Yes
					Detection Rate: 86.7%

802.11be (EHT20) 5500MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5500	LP_SIGNAL_01	Yes
2	5	5500	LP_SIGNAL_02	Yes
3	9	5500	LP_SIGNAL_03	Yes
4	19	5500	LP_SIGNAL_04	Yes
5	16	5500	LP_SIGNAL_05	Yes
6	12	5500	LP_SIGNAL_06	Yes
7	13	5500	LP_SIGNAL_07	Yes
8	10	5500	LP_SIGNAL_08	Yes
9	13	5500	LP_SIGNAL_09	Yes
10	6	5500	LP_SIGNAL_10	Yes
11	16	5496.85	LP_SIGNAL_11	Yes
12	19	5498.05	LP_SIGNAL_12	Yes
13	13	5495.65	LP_SIGNAL_13	Yes
14	10	5494.45	LP_SIGNAL_14	Yes
15	18	5497.65	LP_SIGNAL_15	Yes
16	12	5495.25	LP_SIGNAL_16	Yes
17	20	5498.45	LP_SIGNAL_17	Yes
18	10	5494.45	LP_SIGNAL_18	Yes
19	12	5495.25	LP_SIGNAL_19	Yes
20	10	5494.45	LP_SIGNAL_20	Yes
21	15	5503.52	LP_SIGNAL_21	Yes
22	9	5505.92	LP_SIGNAL_22	Yes
23	20	5501.52	LP_SIGNAL_23	Yes
24	12	5504.72	LP_SIGNAL_24	Yes
25	11	5505.12	LP_SIGNAL_25	Yes
26	5	5507.52	LP_SIGNAL_26	Yes
27	16	5503.12	LP_SIGNAL_27	Yes
28	19	5501.92	LP_SIGNAL_28	Yes
29	10	5505.52	LP_SIGNAL_29	Yes
30	17	5502.72	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT20) 5500MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT40) 5510MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5512	23	326.2	18	3066	Yes
2	5491	9	1474.9	78	678	Yes
3	5523	16	1222.5	65	818	Yes
4	5490	5	1672.2	89	598	Yes
5	5494	7	1567.4	83	638	Yes
6	5495	15	1253.1	67	798	Yes
7	5505	12	1355	72	738	Yes
8	5522	20	1113.6	59	898	Yes
9	5520	11	1392.8	74	718	Yes
10	5525	3	1792.1	95	558	Yes
11	5492	19	1139	61	878	Yes
12	5526	17	1193.3	63	838	Yes
13	5516	2	1858.7	99	538	Yes
14	5503	8	1519.8	81	658	Yes
15	5497	22	1066.1	57	938	Yes
16	5529	-	1065	57	939	Yes
17	5506	-	499	27	2004	Yes
18	5507	-	627.7	34	1593	Yes
19	5496	-	636.5	34	1571	Yes
20	5509	-	1179.2	63	848	Yes
21	5501	-	370.8	20	2697	Yes
22	5515	-	590.7	32	1693	Yes
23	5514	-	557.7	30	1793	Yes
24	5500	-	989.1	53	1011	Yes
25	5498	-	349.4	19	2862	Yes
26	5504	-	997	53	1003	Yes
27	5511	-	363.5	20	2751	Yes
28	5517	-	492.9	27	2029	Yes
29	5527	-	1326.3	70	754	Yes
30	5510	-	803.2	43	1245	Yes
						Detection Rate: 100%

802.11be (EHT40) 5510MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5526	29	4.9	210	Yes
2	5491	24	1.7	178	Yes
3	5493	25	2.1	173	Yes
4	5492	28	4	222	Yes
5	5494	27	3.6	219	Yes
6	5507	29	5	212	Yes
7	5506	29	4.9	176	Yes
8	5497	23	1.1	199	Yes
9	5511	23	1.2	162	Yes
10	5514	29	4.5	220	Yes
11	5496	29	5	229	Yes
12	5500	29	5	214	Yes
13	5513	25	2.4	153	No
14	5516	28	4.1	197	No
15	5499	24	2	211	Yes
16	5505	29	4.6	190	Yes
17	5498	23	1	213	Yes
18	5504	25	2.4	218	Yes
19	5508	26	3.2	215	Yes
20	5523	26	3.1	157	Yes
21	5522	25	2.7	168	No
22	5495	25	2.6	227	Yes
23	5502	24	2	171	Yes
24	5501	23	1.1	158	Yes
25	5518	23	1	167	Yes
26	5512	29	4.9	150	Yes
27	5529	29	4.8	191	Yes
28	5517	25	2.3	159	Yes
29	5509	28	4.3	226	Yes
30	5490	26	3.3	208	Yes
					Detection Rate: 90%

802.11be (EHT40) 5510MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5506	18	9.9	235	Yes
2	5491	16	6.7	357	Yes
3	5522	16	7.1	333	Yes
4	5498	18	9	242	Yes
5	5530	17	8.6	397	Yes
6	5495	18	10	302	Yes
7	5503	18	9.9	203	Yes
8	5499	16	6.1	428	Yes
9	5493	16	6.2	335	No
10	5514	18	9.5	240	Yes
11	5505	18	10	224	Yes
12	5513	18	10	410	Yes
13	5521	17	7.4	359	Yes
14	5528	18	9.1	269	Yes
15	5492	16	7	250	Yes
16	5523	18	9.6	247	Yes
17	5494	16	6	222	Yes
18	5507	17	7.4	424	Yes
19	5490	17	8.2	393	Yes
20	5516	17	8.1	382	Yes
21	5504	17	7.7	486	Yes
22	5511	17	7.6	480	Yes
23	5509	16	7	360	Yes
24	5502	16	6.1	297	Yes
25	5526	16	6	265	Yes
26	5524	18	9.9	263	Yes
27	5518	18	9.8	324	Yes
28	5517	17	7.3	386	Yes
29	5501	18	9.3	311	Yes
30	5496	17	8.3	378	Yes
					Detection Rate: 96.7%

802.11be (EHT40) 5510MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5493	16	19.7	235	Yes
2	5491	12	12.7	357	Yes
3	5513	13	13.6	333	No
4	5506	15	17.7	242	Yes
5	5515	15	16.8	397	Yes
6	5528	16	20	302	Yes
7	5492	16	19.7	203	Yes
8	5507	12	11.3	428	No
9	5514	12	11.5	335	Yes
10	5504	16	18.8	240	Yes
11	5520	16	20	224	Yes
12	5523	16	20	410	Yes
13	5526	13	14.2	359	No
14	5518	15	18	269	No
15	5500	13	13.3	250	Yes
16	5501	16	19	247	Yes
17	5505	12	11.1	222	Yes
18	5521	13	14.2	424	Yes
19	5519	14	15.9	393	Yes
20	5524	14	15.8	382	Yes
21	5502	14	14.8	486	Yes
22	5508	13	14.6	480	Yes
23	5495	13	13.2	360	Yes
24	5530	12	11.3	297	Yes
25	5503	12	11	265	Yes
26	5516	16	19.6	263	Yes
27	5511	16	19.6	324	Yes
28	5517	13	14	386	Yes
29	5512	16	18.3	311	Yes
30	5510	14	16.1	378	Yes
					Detection Rate: 86.7%

802.11be (EHT40) 5510MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	18	5510	LP_SIGNAL_01	No
2	6	5510	LP_SIGNAL_02	Yes
3	10	5510	LP_SIGNAL_03	Yes
4	13	5510	LP_SIGNAL_04	Yes
5	8	5510	LP_SIGNAL_05	Yes
6	13	5510	LP_SIGNAL_06	Yes
7	15	5510	LP_SIGNAL_07	Yes
8	14	5510	LP_SIGNAL_08	Yes
9	12	5510	LP_SIGNAL_09	Yes
10	6	5510	LP_SIGNAL_10	Yes
11	10	5494.8	LP_SIGNAL_11	Yes
12	11	5495.2	LP_SIGNAL_12	Yes
13	6	5493.2	LP_SIGNAL_13	Yes
14	13	5496	LP_SIGNAL_14	Yes
15	11	5495.2	LP_SIGNAL_15	Yes
16	9	5494.4	LP_SIGNAL_16	Yes
17	8	5494	LP_SIGNAL_17	Yes
18	10	5494.8	LP_SIGNAL_18	Yes
19	8	5494	LP_SIGNAL_19	Yes
20	13	5496	LP_SIGNAL_20	Yes
21	6	5526.68	LP_SIGNAL_21	Yes
22	16	5522.68	LP_SIGNAL_22	Yes
23	8	5525.88	LP_SIGNAL_23	Yes
24	9	5525.48	LP_SIGNAL_24	Yes
25	20	5521.08	LP_SIGNAL_25	Yes
26	5	5527.08	LP_SIGNAL_26	Yes
27	6	5526.68	LP_SIGNAL_27	Yes
28	9	5525.48	LP_SIGNAL_28	Yes
29	16	5522.68	LP_SIGNAL_29	Yes
30	17	5522.28	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT40) 5510MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT80) 5530MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5526	18	1165.5	62	858	Yes
2	5563	20	1113.6	59	898	Yes
3	5527	8	1519.8	81	658	Yes
4	5512	19	1139	61	878	Yes
5	5494	6	1618.1	86	618	Yes
6	5495	12	1355	72	738	Yes
7	5511	5	1672.2	89	598	Yes
8	5538	7	1567.4	83	638	Yes
9	5498	22	1066.1	57	938	Yes
10	5532	2	1858.7	99	538	Yes
11	5507	9	1474.9	78	678	Yes
12	5531	14	1285.3	68	778	Yes
13	5544	21	1089.3	58	918	Yes
14	5558	10	1432.7	76	698	Yes
15	5559	3	1792.1	95	558	Yes
16	5523	-	327.8	18	3051	Yes
17	5506	-	425.4	23	2351	Yes
18	5500	-	1085.8	58	921	Yes
19	5543	-	643.1	34	1555	Yes
20	5509	-	386.1	21	2590	Yes
21	5525	-	635.7	34	1573	Yes
22	5547	-	1733.1	92	577	Yes
23	5497	-	479.2	26	2087	Yes
24	5518	-	1003	53	997	Yes
25	5517	-	424.1	23	2358	Yes
26	5552	-	638.6	34	1566	Yes
27	5491	-	412.5	22	2424	Yes
28	5535	-	501.5	27	1994	Yes
29	5492	-	520	28	1923	Yes
30	5569	-	1412.4	75	708	Yes
						Detection Rate: 100%

802.11be (EHT80) 5530MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	23	1.3	228	Yes
2	5499	26	3.2	172	Yes
3	5492	27	3.9	212	Yes
4	5506	24	1.9	213	Yes
5	5507	27	3.6	150	Yes
6	5555	26	3.3	158	Yes
7	5496	29	4.9	210	Yes
8	5501	23	1.3	223	Yes
9	5543	29	4.9	152	Yes
10	5537	27	3.3	190	Yes
11	5505	25	2.7	203	Yes
12	5515	29	5	227	Yes
13	5498	26	3.3	196	Yes
14	5491	28	4.4	198	Yes
15	5520	24	1.9	161	Yes
16	5536	27	3.6	226	Yes
17	5495	26	2.8	181	Yes
18	5500	25	2.5	167	Yes
19	5567	23	1.3	178	Yes
20	5566	25	2.4	187	Yes
21	5539	29	4.8	153	Yes
22	5552	27	3.5	201	Yes
23	5549	23	1.3	166	Yes
24	5565	29	4.8	155	Yes
25	5514	28	4.3	221	Yes
26	5513	26	3.2	191	Yes
27	5508	24	1.7	192	Yes
28	5526	23	1.2	164	Yes
29	5563	25	2.4	154	Yes
30	5519	29	5	207	Yes
					Detection Rate: 100%

802.11be (EHT80) 5530MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5527	16	6.3	403	Yes
2	5526	17	8.2	313	Yes
3	5491	18	8.9	214	Yes
4	5529	16	6.9	262	Yes
5	5521	17	8.6	273	No
6	5524	17	8.3	470	Yes
7	5546	18	9.9	453	Yes
8	5492	16	6.3	378	Yes
9	5513	18	9.9	483	Yes
10	5568	17	8.3	317	No
11	5507	17	7.7	385	Yes
12	5535	18	10	275	Yes
13	5563	17	8.3	497	Yes
14	5490	18	9.4	420	Yes
15	5516	16	6.9	366	Yes
16	5542	17	8.6	414	Yes
17	5552	17	7.8	444	Yes
18	5515	17	7.5	427	Yes
19	5495	16	6.3	338	Yes
20	5497	17	7.4	436	Yes
21	5543	18	9.8	265	Yes
22	5517	17	8.5	451	Yes
23	5512	16	6.3	274	Yes
24	5558	18	9.8	417	No
25	5514	18	9.3	330	Yes
26	5510	17	8.2	472	Yes
27	5533	16	6.7	333	Yes
28	5520	16	6.2	377	No
29	5525	17	7.4	394	Yes
30	5496	18	10	296	Yes
					Detection Rate: 86.7%

802.11be (EHT80) 5530MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5512	12	11.7	403	Yes
2	5514	14	15.9	313	Yes
3	5556	15	17.4	214	No
4	5546	13	13.2	262	Yes
5	5505	15	16.8	273	Yes
6	5551	14	16.1	470	Yes
7	5528	16	19.8	453	Yes
8	5497	12	11.7	378	Yes
9	5524	16	19.8	483	Yes
10	5499	14	16.2	317	Yes
11	5513	14	14.8	385	No
12	5550	16	19.9	275	Yes
13	5541	14	16.1	497	Yes
14	5526	16	18.6	420	No
15	5525	13	13.2	366	Yes
16	5509	15	16.9	414	Yes
17	5515	14	15	444	Yes
18	5507	13	14.4	427	Yes
19	5540	12	11.7	338	No
20	5508	13	14.2	436	Yes
21	5567	16	19.6	265	Yes
22	5506	15	16.5	451	Yes
23	5490	12	11.7	274	Yes
24	5552	16	19.4	417	Yes
25	5536	16	18.3	330	Yes
26	5498	14	15.9	472	Yes
27	5500	12	12.5	333	Yes
28	5502	12	11.5	377	Yes
29	5494	13	14.2	394	Yes
30	5503	16	19.8	296	Yes
					Detection Rate: 86.7%

802.11be (EHT80) 5530MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	6	5530	LP_SIGNAL_01	No
2	13	5530	LP_SIGNAL_02	Yes
3	16	5530	LP_SIGNAL_03	Yes
4	8	5530	LP_SIGNAL_04	Yes
5	15	5530	LP_SIGNAL_05	Yes
6	14	5530	LP_SIGNAL_06	Yes
7	20	5530	LP_SIGNAL_07	Yes
8	6	5530	LP_SIGNAL_08	Yes
9	20	5530	LP_SIGNAL_09	Yes
10	14	5530	LP_SIGNAL_10	Yes
11	11	5495.63	LP_SIGNAL_11	Yes
12	20	5499.23	LP_SIGNAL_12	Yes
13	14	5496.83	LP_SIGNAL_13	Yes
14	18	5498.43	LP_SIGNAL_14	Yes
15	8	5494.43	LP_SIGNAL_15	Yes
16	15	5497.23	LP_SIGNAL_16	Yes
17	12	5496.03	LP_SIGNAL_17	Yes
18	11	5495.63	LP_SIGNAL_18	Yes
19	6	5493.63	LP_SIGNAL_19	Yes
20	10	5495.23	LP_SIGNAL_20	Yes
21	20	5560.65	LP_SIGNAL_21	Yes
22	14	5563.05	LP_SIGNAL_22	Yes
23	6	5566.25	LP_SIGNAL_23	Yes
24	19	5561.05	LP_SIGNAL_24	Yes
25	17	5561.85	LP_SIGNAL_25	Yes
26	13	5563.45	LP_SIGNAL_26	Yes
27	7	5565.85	LP_SIGNAL_27	Yes
28	5	5566.65	LP_SIGNAL_28	Yes
29	10	5564.65	LP_SIGNAL_29	Yes
30	20	5560.65	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT80) 5530MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5325	18	1165.5	62	858	Yes
2	5299	20	1113.6	59	898	Yes
3	5272	8	1519.8	81	658	Yes
4	5253	19	1139	61	878	Yes
5	5326	6	1618.1	86	618	Yes
6	5315	12	1355	72	738	Yes
7	5277	5	1672.2	89	598	Yes
8	5254	7	1567.4	83	638	Yes
9	5319	22	1066.1	57	938	Yes
10	5285	2	1858.7	99	538	Yes
11	5320	9	1474.9	78	678	Yes
12	5261	14	1285.3	68	778	Yes
13	5295	21	1089.3	58	918	Yes
14	5317	10	1432.7	76	698	Yes
15	5278	3	1792.1	95	558	Yes
16	5328	-	327.8	18	3051	Yes
17	5290	-	425.4	23	2351	Yes
18	5274	-	1085.8	58	921	Yes
19	5268	-	643.1	34	1555	Yes
20	5330	-	386.1	21	2590	Yes
21	5270	-	635.7	34	1573	Yes
22	5310	-	1733.1	92	577	Yes
23	5252	-	479.2	26	2087	Yes
24	5283	-	1003	53	997	Yes
25	5287	-	424.1	23	2358	Yes
26	5286	-	638.6	34	1566	Yes
27	5329	-	412.5	22	2424	Yes
28	5314	-	501.5	27	1994	Yes
29	5275	-	520	28	1923	Yes
30	5264	-	1412.4	75	708	Yes
						Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5250	23	1.3	228	Yes
2	5302	26	3.2	172	Yes
3	5252	27	3.9	212	Yes
4	5288	24	1.9	213	Yes
5	5317	27	3.6	150	Yes
6	5328	26	3.3	158	Yes
7	5299	29	4.9	210	Yes
8	5257	23	1.3	223	Yes
9	5258	29	4.9	152	Yes
10	5259	27	3.3	190	Yes
11	5318	25	2.7	203	Yes
12	5253	29	5	227	Yes
13	5286	26	3.3	196	Yes
14	5261	28	4.4	198	Yes
15	5311	24	1.9	161	Yes
16	5290	27	3.6	226	Yes
17	5305	26	2.8	181	Yes
18	5281	25	2.5	167	Yes
19	5313	23	1.3	178	Yes
20	5297	25	2.4	187	Yes
21	5329	29	4.8	153	Yes
22	5251	27	3.5	201	Yes
23	5326	23	1.3	166	Yes
24	5271	29	4.8	155	Yes
25	5255	28	4.3	221	Yes
26	5275	26	3.2	191	Yes
27	5306	24	1.7	192	Yes
28	5277	23	1.2	164	Yes
29	5262	25	2.4	154	Yes
30	5294	29	5	207	Yes
					Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5272	16	6.3	403	Yes
2	5313	17	8.2	313	Yes
3	5283	18	8.9	214	No
4	5296	16	6.9	262	Yes
5	5278	17	8.6	273	No
6	5290	17	8.3	470	Yes
7	5328	18	9.9	453	Yes
8	5288	16	6.3	378	Yes
9	5284	18	9.9	483	Yes
10	5325	17	8.3	317	Yes
11	5330	17	7.7	385	Yes
12	5281	18	10	275	No
13	5262	17	8.3	497	Yes
14	5263	18	9.4	420	Yes
15	5275	16	6.9	366	Yes
16	5326	17	8.6	414	Yes
17	5266	17	7.8	444	Yes
18	5250	17	7.5	427	No
19	5294	16	6.3	338	Yes
20	5311	17	7.4	436	Yes
21	5279	18	9.8	265	Yes
22	5271	17	8.5	451	Yes
23	5310	16	6.3	274	Yes
24	5318	18	9.8	417	Yes
25	5321	18	9.3	330	No
26	5327	17	8.2	472	Yes
27	5301	16	6.7	333	Yes
28	5277	16	6.2	377	Yes
29	5308	17	7.4	394	Yes
30	5309	18	10	296	Yes
					Detection Rate: 83.3%

802.11be (EHT160) 5250MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5323	12	11.7	403	Yes
2	5303	14	15.9	313	No
3	5264	15	17.4	214	Yes
4	5297	13	13.2	262	Yes
5	5301	15	16.8	273	Yes
6	5314	14	16.1	470	Yes
7	5309	16	19.8	453	Yes
8	5311	12	11.7	378	No
9	5258	16	19.8	483	Yes
10	5312	14	16.2	317	Yes
11	5307	14	14.8	385	No
12	5259	16	19.9	275	Yes
13	5262	14	16.1	497	Yes
14	5263	16	18.6	420	Yes
15	5327	13	13.2	366	No
16	5283	15	16.9	414	Yes
17	5280	14	15	444	Yes
18	5254	13	14.4	427	Yes
19	5316	12	11.7	338	Yes
20	5252	13	14.2	436	Yes
21	5270	16	19.6	265	Yes
22	5271	15	16.5	451	Yes
23	5328	12	11.7	274	Yes
24	5291	16	19.4	417	Yes
25	5306	16	18.3	330	Yes
26	5275	14	15.9	472	No
27	5261	12	12.5	333	Yes
28	5318	12	11.5	377	Yes
29	5267	13	14.2	394	Yes
30	5281	16	19.8	296	Yes
					Detection Rate: 83.3%

802.11be (EHT160) 5250MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	5	5290	LP_SIGNAL_01	Yes
2	16	5290	LP_SIGNAL_02	Yes
3	14	5290	LP_SIGNAL_03	Yes
4	16	5290	LP_SIGNAL_04	Yes
5	9	5290	LP_SIGNAL_05	Yes
6	14	5290	LP_SIGNAL_06	Yes
7	6	5290	LP_SIGNAL_07	Yes
8	18	5290	LP_SIGNAL_08	Yes
9	11	5290	LP_SIGNAL_09	Yes
10	16	5290	LP_SIGNAL_10	Yes
11	20	5258	LP_SIGNAL_11	Yes
12	6	5252.4	LP_SIGNAL_12	Yes
13	18	5257.2	LP_SIGNAL_13	Yes
14	17	5256.8	LP_SIGNAL_14	Yes
15	7	5252.8	LP_SIGNAL_15	Yes
16	18	5257.2	LP_SIGNAL_16	Yes
17	14	5255.6	LP_SIGNAL_17	Yes
18	16	5256.4	LP_SIGNAL_18	Yes
19	12	5254.8	LP_SIGNAL_19	Yes
20	19	5257.6	LP_SIGNAL_20	Yes
21	13	5322.63	LP_SIGNAL_21	Yes
22	6	5325.43	LP_SIGNAL_22	Yes
23	17	5321.03	LP_SIGNAL_23	Yes
24	7	5325.03	LP_SIGNAL_24	Yes
25	9	5324.23	LP_SIGNAL_25	Yes
26	11	5323.43	LP_SIGNAL_26	Yes
27	18	5320.63	LP_SIGNAL_27	Yes
28	9	5324.23	LP_SIGNAL_28	Yes
29	6	5325.43	LP_SIGNAL_29	Yes
30	20	5319.83	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5250MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT160) 5570MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5588	22	1066.1	57	938	Yes
2	5502	1	1930.5	102	518	Yes
3	5580	2	1858.7	99	538	Yes
4	5491	21	1089.3	58	918	Yes
5	5623	15	1253.1	67	798	Yes
6	5534	18	1165.5	62	858	Yes
7	5620	9	1474.9	78	678	Yes
8	5650	16	1222.5	65	818	Yes
9	5550	11	1392.8	74	718	Yes
10	5543	8	1519.8	81	658	Yes
11	5506	6	1618.1	86	618	Yes
12	5553	19	1139	61	878	Yes
13	5581	17	1193.3	63	838	Yes
14	5628	23	326.2	18	3066	Yes
15	5606	7	1567.4	83	638	Yes
16	5640	-	596.3	32	1677	Yes
17	5524	-	404.5	22	2472	Yes
18	5557	-	610.1	33	1639	Yes
19	5508	-	498.5	27	2006	Yes
20	5509	-	761	41	1314	Yes
21	5549	-	390.8	21	2559	Yes
22	5501	-	925.9	49	1080	Yes
23	5591	-	986.2	53	1014	Yes
24	5519	-	373.3	20	2679	Yes
25	5638	-	914.9	49	1093	Yes
26	5515	-	784.3	42	1275	Yes
27	5643	-	770.4	41	1298	Yes
28	5575	-	349.5	19	2861	Yes
29	5521	-	397	21	2519	Yes
30	5639	-	963.4	51	1038	Yes
						Detection Rate: 100%

802.11be (EHT160) 5570MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5586	25	2.3	199	Yes
2	5491	24	1.7	229	Yes
3	5566	24	1.6	169	Yes
4	5493	28	4	218	Yes
5	5589	24	1.6	185	Yes
6	5624	28	4.3	196	Yes
7	5501	25	2.5	160	Yes
8	5555	27	3.5	167	Yes
9	5498	26	2.7	176	Yes
10	5595	27	3.8	209	Yes
11	5574	26	2.9	180	Yes
12	5517	28	4.3	157	Yes
13	5627	24	1.6	181	No
14	5640	29	4.7	162	Yes
15	5587	28	4.3	182	Yes
16	5533	23	1.2	215	Yes
17	5579	26	3	205	Yes
18	5532	24	2.1	197	Yes
19	5612	26	3.1	155	Yes
20	5544	24	2	220	Yes
21	5514	27	3.5	204	Yes
22	5519	24	2	200	Yes
23	5561	23	1	161	Yes
24	5616	24	1.9	230	Yes
25	5545	29	4.9	206	Yes
26	5530	26	3.1	210	Yes
27	5643	24	1.8	221	Yes
28	5536	29	4.5	227	Yes
29	5518	23	1	151	Yes
30	5524	23	1.3	216	Yes
					Detection Rate: 96.7%

802.11be (EHT160) 5570MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	16	7.3	378	Yes
2	5625	16	6.7	455	Yes
3	5522	16	6.6	473	Yes
4	5581	18	9	462	Yes
5	5597	16	6.6	436	Yes
6	5650	18	9.3	406	No
7	5496	17	7.5	213	Yes
8	5638	17	8.5	417	Yes
9	5579	17	7.7	317	No
10	5617	18	8.8	444	Yes
11	5594	17	7.9	223	Yes
12	5575	18	9.3	297	Yes
13	5502	16	6.6	495	Yes
14	5627	18	9.7	325	No
15	5590	18	9.3	221	Yes
16	5643	16	6.2	238	Yes
17	5605	17	8	247	Yes
18	5551	16	7.1	225	Yes
19	5585	17	8.1	361	Yes
20	5598	16	7	275	Yes
21	5574	17	8.5	306	Yes
22	5569	16	7	418	Yes
23	5578	16	6	327	No
24	5520	16	6.9	457	Yes
25	5513	18	9.9	328	Yes
26	5554	17	8.1	278	Yes
27	5553	16	6.8	366	Yes
28	5633	18	9.5	326	Yes
29	5538	16	6	380	Yes
30	5552	16	6.3	254	No
					Detection Rate: 83.3%

802.11be (EHT160) 5570MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5625	13	13.9	378	Yes
2	5505	12	12.7	455	Yes
3	5492	12	12.5	473	Yes
4	5618	15	17.7	462	Yes
5	5610	12	12.5	436	Yes
6	5550	16	18.3	406	Yes
7	5604	13	14.5	213	No
8	5497	15	16.5	417	Yes
9	5570	14	14.9	317	Yes
10	5571	15	17.2	444	Yes
11	5506	14	15.3	223	Yes
12	5510	16	18.3	297	No
13	5520	12	12.3	495	Yes
14	5597	16	19.3	325	Yes
15	5504	16	18.5	221	No
16	5585	12	11.5	238	No
17	5600	14	15.4	247	Yes
18	5538	13	13.4	225	Yes
19	5491	14	15.7	361	No
20	5607	13	13.2	275	Yes
21	5645	15	16.7	306	Yes
22	5511	13	13.4	418	Yes
23	5501	12	11	327	No
24	5507	13	13.1	457	Yes
25	5514	16	19.6	328	Yes
26	5515	14	15.8	278	Yes
27	5531	13	12.8	366	Yes
28	5565	16	18.8	326	No
29	5626	12	11	380	Yes
30	5537	12	11.7	254	Yes
					Detection Rate: 76.7%

802.11be (EHT160) 5570MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5570	LP_SIGNAL_01	Yes
2	5	5570	LP_SIGNAL_02	Yes
3	9	5570	LP_SIGNAL_03	Yes
4	19	5570	LP_SIGNAL_04	Yes
5	16	5570	LP_SIGNAL_05	Yes
6	12	5570	LP_SIGNAL_06	Yes
7	13	5570	LP_SIGNAL_07	Yes
8	10	5570	LP_SIGNAL_08	Yes
9	13	5570	LP_SIGNAL_09	Yes
10	6	5570	LP_SIGNAL_10	Yes
11	16	5498.18	LP_SIGNAL_11	Yes
12	19	5499.38	LP_SIGNAL_12	Yes
13	13	5496.98	LP_SIGNAL_13	Yes
14	10	5495.78	LP_SIGNAL_14	Yes
15	18	5498.98	LP_SIGNAL_15	Yes
16	12	5496.58	LP_SIGNAL_16	Yes
17	20	5499.78	LP_SIGNAL_17	Yes
18	10	5495.78	LP_SIGNAL_18	Yes
19	12	5496.58	LP_SIGNAL_19	Yes
20	10	5495.78	LP_SIGNAL_20	Yes
21	15	5641.2	LP_SIGNAL_21	Yes
22	9	5643.6	LP_SIGNAL_22	Yes
23	20	5639.2	LP_SIGNAL_23	Yes
24	12	5642.4	LP_SIGNAL_24	Yes
25	11	5642.8	LP_SIGNAL_25	Yes
26	5	5645.2	LP_SIGNAL_26	Yes
27	16	5640.8	LP_SIGNAL_27	Yes
28	19	5639.6	LP_SIGNAL_28	Yes
29	10	5643.2	LP_SIGNAL_29	Yes
30	17	5640.4	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5570MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT240) 5610MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5490	22	1066.1	57	938	Yes
2	5608	10	1432.7	76	698	Yes
3	5634	6	1618.1	86	618	Yes
4	5693	2	1858.7	99	538	Yes
5	5639	19	1139	61	878	Yes
6	5547	23	326.2	18	3066	No
7	5718	7	1567.4	83	638	Yes
8	5512	21	1089.3	58	918	Yes
9	5587	17	1193.3	63	838	Yes
10	5702	18	1165.5	62	858	Yes
11	5522	15	1253.1	67	798	Yes
12	5596	11	1392.8	74	718	Yes
13	5507	4	1730.1	92	578	Yes
14	5682	5	1672.2	89	598	Yes
15	5504	3	1792.1	95	558	Yes
16	5526	-	394.3	21	2536	Yes
17	5649	-	1035.2	55	966	Yes
18	5648	-	1209.2	64	827	Yes
19	5508	-	399.8	22	2501	Yes
20	5590	-	385.4	21	2595	Yes
21	5711	-	897.7	48	1114	Yes
22	5549	-	768	41	1302	Yes
23	5652	-	328.4	18	3045	Yes
24	5642	-	615.8	33	1624	Yes
25	5686	-	347.5	19	2878	Yes
26	5623	-	973.7	52	1027	Yes
27	5516	-	402.4	22	2485	Yes
28	5681	-	625	33	1600	Yes
29	5561	-	853.2	46	1172	Yes
30	5674	-	849.6	45	1177	Yes
						Detection Rate: 96.7%

802.11be (EHT240) 5610MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5513	26	3.2	179	Yes
2	5508	23	1.1	207	Yes
3	5573	24	2.1	230	Yes
4	5676	29	4.8	200	Yes
5	5495	28	3.9	214	Yes
6	5512	26	2.9	222	Yes
7	5490	26	3.2	204	Yes
8	5497	25	2.5	192	Yes
9	5645	26	3.1	164	Yes
10	5649	23	1.2	156	No
11	5714	27	3.9	210	Yes
12	5561	29	4.6	201	Yes
13	5491	26	3.2	162	No
14	5636	25	2.2	197	Yes
15	5644	29	4.5	163	Yes
16	5685	26	3	203	Yes
17	5575	29	5	168	Yes
18	5625	25	2.4	217	Yes
19	5656	26	2.9	191	Yes
20	5662	25	2.3	166	No
21	5564	27	3.7	150	Yes
22	5540	25	2.2	176	Yes
23	5527	29	4.9	195	Yes
24	5601	26	2.9	202	Yes
25	5542	25	2.5	178	Yes
26	5690	23	1.1	206	Yes
27	5704	27	3.8	155	Yes
28	5534	29	4.7	157	Yes
29	5517	25	2.4	224	Yes
30	5711	28	4.2	159	Yes
					Detection Rate: 90%

802.11be (EHT240) 5610MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5647	17	8.2	355	No
2	5518	16	6.1	487	Yes
3	5492	16	7.1	344	Yes
4	5493	18	9.8	288	Yes
5	5576	18	8.9	230	Yes
6	5581	17	7.9	432	Yes
7	5674	17	8.2	207	Yes
8	5721	17	7.5	443	Yes
9	5512	17	8.1	439	Yes
10	5692	16	6.2	223	Yes
11	5500	18	8.9	208	No
12	5501	18	9.6	463	Yes
13	5612	17	8.2	441	Yes
14	5521	16	7.2	323	No
15	5504	18	9.5	297	Yes
16	5717	17	8	412	Yes
17	5506	18	10	324	Yes
18	5693	17	7.4	271	Yes
19	5508	17	7.9	349	Yes
20	5590	16	7.3	409	Yes
21	5639	18	8.7	373	Yes
22	5623	16	7.2	254	Yes
23	5599	18	9.9	274	Yes
24	5637	17	7.9	278	No
25	5495	17	7.5	317	Yes
26	5525	16	6.1	260	Yes
27	5553	18	8.8	211	Yes
28	5667	18	9.7	272	No
29	5608	17	7.4	264	No
30	5536	18	9.2	284	Yes
					Detection Rate: 80%

802.11be (EHT240) 5610MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5530	14	16	355	Yes
2	5536	12	11.3	487	Yes
3	5720	13	13.5	344	Yes
4	5493	16	19.4	288	Yes
5	5542	15	17.5	230	No
6	5535	14	15.3	432	Yes
7	5657	14	15.9	207	Yes
8	5697	13	14.3	443	Yes
9	5555	14	15.8	439	Yes
10	5712	12	11.5	223	No
11	5585	15	17.4	208	Yes
12	5704	16	19	463	Yes
13	5662	14	16	441	Yes
14	5503	13	13.8	323	Yes
15	5686	16	18.9	297	Yes
16	5505	14	15.5	412	No
17	5506	16	19.9	324	Yes
18	5531	13	14.1	271	Yes
19	5508	14	15.2	349	No
20	5575	13	13.8	409	No
21	5714	15	17.1	373	Yes
22	5643	13	13.8	254	No
23	5601	16	19.8	274	Yes
24	5513	14	15.3	278	Yes
25	5494	13	14.5	317	No
26	5621	12	11.3	260	Yes
27	5628	15	17.3	211	Yes
28	5541	16	19.2	272	Yes
29	5564	13	14.2	264	No
30	5523	15	18.2	284	No
					Detection Rate: 70%

802.11be (EHT240) 5610MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5610	LP_SIGNAL_01	Yes
2	5	5610	LP_SIGNAL_02	Yes
3	9	5610	LP_SIGNAL_03	Yes
4	19	5610	LP_SIGNAL_04	Yes
5	16	5610	LP_SIGNAL_05	Yes
6	12	5610	LP_SIGNAL_06	Yes
7	13	5610	LP_SIGNAL_07	Yes
8	10	5610	LP_SIGNAL_08	Yes
9	13	5610	LP_SIGNAL_09	Yes
10	6	5610	LP_SIGNAL_10	Yes
11	16	5496.75	LP_SIGNAL_11	Yes
12	19	5497.95	LP_SIGNAL_12	Yes
13	13	5495.55	LP_SIGNAL_13	Yes
14	10	5494.35	LP_SIGNAL_14	Yes
15	18	5497.55	LP_SIGNAL_15	Yes
16	12	5495.15	LP_SIGNAL_16	Yes
17	20	5498.35	LP_SIGNAL_17	Yes
18	10	5494.35	LP_SIGNAL_18	Yes
19	12	5495.15	LP_SIGNAL_19	Yes
20	10	5494.35	LP_SIGNAL_20	Yes
21	15	5718.4	LP_SIGNAL_21	Yes
22	9	5720.8	LP_SIGNAL_22	Yes
23	20	5716.4	LP_SIGNAL_23	Yes
24	12	5719.6	LP_SIGNAL_24	Yes
25	11	5720	LP_SIGNAL_25	Yes
26	5	5722.4	LP_SIGNAL_26	No
27	16	5718	LP_SIGNAL_27	Yes
28	19	5716.8	LP_SIGNAL_28	Yes
29	10	5720.4	LP_SIGNAL_29	Yes
30	17	5717.6	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT240) 5610MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

8 Declaration of Conformity by the Manufacturer

8.1 Transmit Power Control (TPC)

U-NII devices operating in DFS Bands (5.25 to 5.35 GHz and 5.47 to 5.725 GHz) shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

The maximum EIRP of this device is 835.661 mW, and it has TPC functionality.

The UUT can adjust a transmitter's output power according to the device's Transmit Power Control (TPC) triggering mechanism. The TPC is controlled by the operation mode declared by the manufacturer.

8.2 Statement of Manufacturer

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

9 Pictures of Test Arrangements

Please refer to the attached file (DFS Test Setup Photo)

10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety/SAR Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

11 Appendix

11.1 Radar Test Signal

The Long Pulse Radar Pattern

802.11be (EHT20) 5500MHz

Long Pulse Radar Test Signal Test Signal Name: LP_SIGNAL_01 Number of Bursts in Trial: 15 Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal Test Signal Name: LP_SIGNAL_02 Number of Bursts in Trial: 8 Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5496.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_12

Number of Bursts in Trial: 19

Chirp Center Frequency: 5498.05MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_13

Number of Bursts in Trial: 15

Chirp Center Frequency: 5495.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.45MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5497.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.25MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498.45MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.45MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.25MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.45MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5503.52MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5505.92MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5501.52MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5504.72MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5505.12MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_26

Number of Bursts in Trial: 8

Chirp Center Frequency: 5507.52MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_27

Number of Bursts in Trial: 17

Chirp Center Frequency: 5503.12MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_28

Number of Bursts in Trial: 19

Chirp Center Frequency: 5501.92MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_29

Number of Bursts in Trial: 12

Chirp Center Frequency: 5505.52MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_30

Number of Bursts in Trial: 18

Chirp Center Frequency: 5502.72MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT40) 5510MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 18						
Chirp Center Frequency: 5510MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	92	1861	1336	1404
2	1	18	54.8	1221	-	-
3	2	18	67.6	1852	1245	-
4	2	18	76.6	1463	1782	-
5	1	18	60.5	1007	-	-
6	2	18	75	1614	1139	-
7	3	18	83.7	1397	1131	1808
8	2	18	80.8	1541	1670	-
9	2	18	73.7	1505	1672	-
10	1	18	55.3	1317	-	-
11	2	18	67.2	1136	1163	-
12	2	18	70.9	1175	1751	-
13	1	18	54.9	1309	-	-
14	2	18	75.1	1805	1990	-
15	2	18	70	1343	1849	-
16	1	18	64	1803	-	-
17	1	18	60.9	1127	-	-
18	2	18	68	1233	1677	-

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_02						
Number of Bursts in Trial: 9						
Chirp Center Frequency: 5510MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	59.7	1687	-	-
2	2	6	75.3	1365	1518	-
3	1	6	53.2	1160	-	-
4	3	6	85.7	1921	1318	1205
5	1	6	61.3	1120	-	-
6	1	6	65.3	1455	-	-
7	3	6	99.1	1333	1167	1776
8	1	6	51.9	1226	-	-
9	1	6	56.1	1725	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	64.8	1539	-	-
2	3	10	87.3	1823	1695	1369
3	3	10	88.2	1904	1422	1676
4	2	10	81.9	1720	1686	-
5	2	10	77.3	1840	1095	-
6	1	10	51.9	1671	-	-
7	1	10	62.2	1864	-	-
8	2	10	67.3	1616	1232	-
9	1	10	62.6	1133	-	-
10	1	10	56	1634	-	-
11	3	10	93.9	1717	1712	1019
12	3	10	94.8	1290	1381	1440

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	53.3	1197	-	-
2	1	13	56.1	1683	-	-
3	2	13	81	1083	1008	-
4	3	13	83.7	1228	1387	1579
5	2	13	75.7	1057	1026	-
6	2	13	68.1	1108	1760	-
7	3	13	90	1331	1255	1264
8	1	13	61.8	1647	-	-
9	2	13	80.2	1834	1575	-
10	1	13	55.6	1826	-	-
11	2	13	78.8	1649	1471	-
12	1	13	66	1092	-	-
13	1	13	50.2	1354	-	-
14	2	13	72.6	1287	1142	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_05

Number of Bursts in Trial: 10

Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	54.6	1713	-	-
2	1	8	51.5	1516	-	-
3	1	8	56.2	1959	-	-
4	3	8	93.5	1249	1946	1182
5	1	8	52.3	1437	-	-
6	2	8	77.5	1225	1246	-
7	1	8	58.5	1890	-	-
8	2	8	68.9	1678	1612	-
9	2	8	68.9	1963	1599	-
10	3	8	93.6	1098	1590	1124

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_06

Number of Bursts in Trial: 14

Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	85.6	1375	1556	1462
2	2	13	73.4	1701	1374	-
3	3	13	89.9	1711	1059	1927
4	2	13	69	1793	1630	-
5	3	13	92.8	1981	1844	1984
6	1	13	57.8	1976	-	-
7	1	13	57.3	1086	-	-
8	1	13	57.9	1316	-	-
9	2	13	67	1561	1810	-
10	2	13	73.3	1586	1417	-
11	1	13	56.4	1831	-	-
12	2	13	69.2	1896	1283	-
13	2	13	72.3	1018	1010	-
14	1	13	51.9	1156	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_07

Number of Bursts in Trial: 16

Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	85.7	1965	1116	1746
2	3	15	97.3	1626	1504	1230
3	1	15	59.1	1914	-	-
4	3	15	90.2	1841	1068	1838
5	2	15	76	1636	1391	-
6	1	15	59.2	1060	-	-
7	1	15	58.4	1499	-	-
8	2	15	72.2	1159	1704	-
9	2	15	81.7	1779	1540	-
10	1	15	54.7	1029	-	-
11	3	15	97.3	1291	1257	1962
12	1	15	60.7	1799	-	-
13	1	15	61	1662	-	-
14	2	15	69.1	1432	1364	-
15	1	15	53.7	1555	-	-
16	1	15	66.3	1096	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_08

Number of Bursts in Trial: 16

Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	14	86.2	1062	1236	1886
2	3	14	84.5	1608	1340	1754
3	3	14	87.2	1315	1247	1425
4	3	14	87.5	1501	1978	1270
5	3	14	98.2	1952	1398	1693
6	1	14	52.2	1087	-	-
7	2	14	78.2	1037	1104	-
8	2	14	71	1454	1439	-
9	2	14	69.1	1578	1781	-
10	2	14	72.3	1708	1500	-
11	3	14	98.3	1523	1368	1325
12	2	14	70.9	1474	1491	-
13	3	14	99	1155	1176	1893
14	2	14	76.9	1407	1642	-
15	1	14	66.2	1532	-	-
16	3	14	85.5	1115	1783	1020

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	79.2	1307	1564	-
2	1	12	54.3	1106	-	-
3	1	12	57.8	1395	-	-
4	1	12	55	1067	-	-
5	2	12	68.4	1513	1101	-
6	2	12	68.4	1912	1739	-
7	3	12	93	1710	1431	1272
8	1	12	59.6	1093	-	-
9	3	12	85.1	1231	1200	1353
10	1	12	63.3	1367	-	-
11	3	12	91.7	1757	1032	1412
12	3	12	85.2	1441	1791	1164
13	2	12	71.8	1146	1552	-
14	2	12	82.1	1699	1065	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	6	96.9	1909	1251	1393
2	3	6	88.2	1569	1446	1212
3	1	6	54.1	1262	-	-
4	1	6	50.6	1859	-	-
5	3	6	87.2	1932	1320	1390
6	2	6	72	1134	1473	-
7	2	6	82	1447	2000	-
8	3	6	84.8	1874	1224	1429
9	1	6	53.7	1442	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	83.4	1015	1669	1813
2	2	10	69	1241	1897	-
3	3	10	88.1	1123	1570	1664
4	2	10	71	1502	1770	-
5	1	10	53.6	1036	-	-
6	1	10	60.9	1003	-	-
7	3	10	87.6	1276	1459	1038
8	2	10	73.2	1958	1902	-
9	1	10	54.8	1191	-	-
10	3	10	88.5	1211	1047	1796
11	1	10	61.7	1644	-	-
12	2	10	81.5	1531	1344	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5495.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	11	56.6	1166	-	-
2	1	11	61.3	1527	-	-
3	3	11	98.8	1581	1625	1192
4	3	11	98	1837	1835	1328
5	2	11	67.7	1551	1089	-
6	3	11	91.6	1947	1448	1430
7	2	11	77.6	1147	1607	-
8	1	11	52.3	1450	-	-
9	3	11	84.8	1213	1169	1577
10	1	11	60.5	1410	-	-
11	3	11	93.1	1759	1594	1622
12	3	11	99.3	1366	1498	1189
13	3	11	87	1666	1064	1877

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_13

Number of Bursts in Trial: 9

Chirp Center Frequency: 5493.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	75.5	1351	1183	-
2	1	6	60.1	1765	-	-
3	2	6	66.7	1497	1653	-
4	3	6	98.3	1773	1356	1206
5	3	6	89.7	1611	1004	1113
6	3	6	94.3	1121	1435	1360
7	1	6	53.4	1215	-	-
8	3	6	94.5	1565	1731	1438
9	1	6	50.5	1187	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_14

Number of Bursts in Trial: 14

Chirp Center Frequency: 5496MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	74.4	1721	1603	-
2	3	13	86	1194	1875	1479
3	2	13	80.3	1480	1258	-
4	3	13	97.4	1348	1125	1370
5	3	13	89.3	1815	1968	1384
6	3	13	98.7	1545	1872	1185
7	3	13	97.5	1884	1470	1152
8	3	13	90.2	1998	1780	1044
9	3	13	86.9	1299	1900	1243
10	3	13	96.7	1198	1070	1888
11	1	13	60	1265	-	-
12	1	13	50.5	1918	-	-
13	3	13	90.2	1472	1851	1585
14	2	13	76.8	1170	1651	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_15

Number of Bursts in Trial: 13

Chirp Center Frequency: 5495.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	11	55.4	1658	-	-
2	1	11	52.7	1706	-	-
3	2	11	69.5	1389	1566	-
4	2	11	80.4	1484	1733	-
5	1	11	54.3	1434	-	-
6	2	11	82.4	1304	1244	-
7	2	11	68.9	1324	1719	-
8	2	11	72.9	1382	1486	-
9	2	11	76	1882	1600	-
10	3	11	88.9	1802	1660	1800
11	3	11	84	1682	1696	1458
12	2	11	78.2	1572	1489	-
13	1	11	50.8	1661	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_16

Number of Bursts in Trial: 11

Chirp Center Frequency: 5494.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	70.9	1461	1700	-
2	2	9	75	1401	1495	-
3	1	9	65.1	1936	-	-
4	3	9	94.3	1467	1657	1385
5	1	9	58.3	1099	-	-
6	3	9	87.1	1452	1090	1319
7	1	9	56	1971	-	-
8	3	9	87	1372	1222	1997
9	1	9	62.7	1453	-	-
10	2	9	67.7	1923	1153	-
11	2	9	70.3	1804	1845	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5494MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	52.2	1944	-	-
2	2	8	78.9	1234	1596	-
3	1	8	54.9	1119	-	-
4	3	8	94.7	1143	1297	1689
5	2	8	73.6	1576	1606	-
6	3	8	96.4	1601	1478	1406
7	3	8	89.2	1042	1405	1162
8	3	8	86.5	1597	1836	1118
9	3	8	85.3	1180	1858	1628
10	2	8	83.3	1919	1580	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	61.2	1482	-	-
2	3	10	95.6	1178	1916	1266
3	2	10	70.2	1591	1427	-
4	1	10	63.8	1420	-	-
5	3	10	99.1	1934	1081	1202
6	1	10	62	1444	-	-
7	2	10	81.7	1526	1632	-
8	1	10	51.5	1915	-	-
9	1	10	60	1141	-	-
10	3	10	91.4	1110	1001	1052
11	1	10	63.3	1012	-	-
12	1	10	61.1	1300	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_19

Number of Bursts in Trial: 10

Chirp Center Frequency: 5494MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	8	97.9	1339	1817	1667
2	2	8	76.6	1961	1953	-
3	1	8	65.1	1457	-	-
4	2	8	71.8	1756	1386	-
5	1	8	52.4	1028	-	-
6	1	8	51.7	1379	-	-
7	1	8	63.5	1184	-	-
8	3	8	84.2	1190	1970	1254
9	3	8	89.9	1259	1112	1371
10	3	8	92.7	1408	1002	1151

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_20

Number of Bursts in Trial: 14

Chirp Center Frequency: 5496MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	85.1	1496	1985	1865
2	3	13	99.3	1926	1520	1820
3	2	13	78.2	1218	1648	-
4	2	13	75.5	1640	1726	-
5	2	13	77.5	1975	1928	-
6	2	13	74.2	1656	1433	-
7	3	13	99.3	1878	1827	1013
8	2	13	79.7	1237	1358	-
9	3	13	99.8	1494	1605	1892
10	3	13	97.6	1298	1399	1910
11	3	13	92.9	1464	1752	1049
12	2	13	67.5	1788	1798	-
13	1	13	59.6	1252	-	-
14	2	13	79.5	1326	1993	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_21

Number of Bursts in Trial: 8

Chirp Center Frequency: 5526.68MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	6	94.9	1103	1941	1707
2	2	6	80.4	1035	1930	-
3	1	6	59.2	1665	-	-
4	2	6	75	1778	1414	-
5	2	6	74.4	1787	1033	-
6	3	6	85.5	1126	1144	1945
7	1	6	52.7	1582	-	-
8	2	6	76.3	1279	1413	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_22

Number of Bursts in Trial: 17

Chirp Center Frequency: 5522.68MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	16	56.9	1515	-	-
2	3	16	91.1	1460	1645	1954
3	2	16	81.1	1027	1705	-
4	2	16	78.3	1967	1737	-
5	2	16	79.6	1530	1908	-
6	1	16	51.8	1392	-	-
7	3	16	93.9	1690	1816	1267
8	3	16	87.5	1423	1758	1857
9	2	16	72.9	1623	1768	-
10	1	16	51.1	1522	-	-
11	3	16	93.5	1809	1031	1174
12	2	16	68.5	1149	1383	-
13	1	16	60.5	1867	-	-
14	2	16	71	1617	1903	-
15	3	16	85.7	1987	1807	1506
16	2	16	73.6	1069	1742	-
17	3	16	84.5	1186	1097	1753

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5525.88MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	57.4	1268	-	-
2	1	8	52.3	1310	-	-
3	2	8	80.3	1524	1428	-
4	3	8	91.7	1880	1388	1869
5	1	8	65.8	1350	-	-
6	2	8	68.2	1207	1519	-
7	2	8	80.3	1330	1548	-
8	2	8	66.9	1560	1675	-
9	3	8	85.7	1051	1148	1288
10	2	8	76.9	1922	1832	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5525.48MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	72	1692	1161	-
2	3	9	92.6	1956	1122	1078
3	3	9	88.6	1248	1830	1525
4	1	9	59.7	1066	-	-
5	1	9	54.4	1311	-	-
6	3	9	90	1901	1449	1046
7	1	9	58.7	1154	-	-
8	3	9	92.3	1863	1342	1724
9	3	9	87.1	1538	1983	1400
10	3	9	94.4	1195	1824	1574
11	3	9	99.2	1637	1931	1992

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_25

Number of Bursts in Trial: 20

Chirp Center Frequency: 5521.08MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	94.7	1177	1359	1619
2	3	20	97.4	1376	1627	1785
3	3	20	85.8	1848	1613	1615
4	1	20	62.2	1308	-	-
5	2	20	74.7	1543	1917	-
6	3	20	91.8	1920	1355	1011
7	2	20	74.1	1295	1209	-
8	3	20	91.1	1906	1048	1082
9	2	20	69	1193	1715	-
10	2	20	73.9	1979	1292	-
11	3	20	94.8	1076	1021	1964
12	3	20	85.6	1684	1240	1856
13	3	20	90.5	1948	1969	1109
14	2	20	67	1219	1895	-
15	2	20	83.2	1378	1173	-
16	2	20	72.4	1550	1905	-
17	3	20	84.6	1227	1736	1284
18	3	20	91.2	1950	1415	1220
19	2	20	72.9	1639	1128	-
20	1	20	50.8	1913	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_26

Number of Bursts in Trial: 8

Chirp Center Frequency: 5527.08MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	61.4	1023	-	-
2	3	5	93.9	1054	1559	1974
3	2	5	74.9	1000	1451	-
4	2	5	71.8	1991	1514	-
5	3	5	95	1819	1306	1294
6	3	5	84.4	1436	1100	1681
7	3	5	91.4	1727	1999	1302
8	3	5	89.1	1860	1534	1130

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5526.68MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	78.6	1939	1833	-
2	1	6	51.7	1466	-	-
3	2	6	78.7	1285	1261	-
4	3	6	98.6	1655	1137	1812
5	2	6	79.3	1598	1735	-
6	3	6	85.4	1488	1217	1762
7	1	6	62.7	1703	-	-
8	1	6	54.9	1014	-	-
9	3	6	94.5	1508	1280	1041

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5525.48MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	79.5	1256	1749	-
2	3	9	91.1	1966	1477	1635
3	2	9	76.5	1772	1363	-
4	1	9	56.2	1204	-	-
5	2	9	75.8	1609	1199	-
6	2	9	66.7	1416	1380	-
7	1	9	53	1868	-	-
8	2	9	77.3	1274	1994	-
9	1	9	56.9	1253	-	-
10	3	9	98.1	1643	1995	1239
11	3	9	92.7	1072	1313	1588

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_29

Number of Bursts in Trial: 17

Chirp Center Frequency: 5522.68MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.3	1080	1536	-
2	2	16	67.5	1621	1734	-
3	2	16	74.1	1679	1512	-
4	1	16	51.1	1771	-	-
5	1	16	64.2	1006	-	-
6	3	16	93.5	1216	1866	1238
7	3	16	87.8	1314	1774	1196
8	1	16	50.8	1553	-	-
9	2	16	72.4	1327	1403	-
10	1	16	63.9	1483	-	-
11	2	16	67.3	1789	1542	-
12	3	16	90.4	1546	1942	1050
13	1	16	50.3	1521	-	-
14	3	16	85.1	1084	1879	1475
15	1	16	62.5	1332	-	-
16	2	16	67.2	1305	1573	-
17	3	16	95.2	1567	1638	1445

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_30

Number of Bursts in Trial: 17

Chirp Center Frequency: 5522.28MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	96.2	1077	1424	1811
2	1	17	56.2	1624	-	-
3	1	17	55.1	1024	-	-
4	1	17	54.3	1347	-	-
5	2	17	78.2	1056	1242	-
6	2	17	77.9	1943	1843	-
7	1	17	55.1	1743	-	-
8	1	17	50	1025	-	-
9	3	17	96.5	1862	1129	1631
10	3	17	94.7	1891	1562	1747
11	3	17	85.7	1761	1698	1476
12	2	17	77.2	1691	1714	-
13	2	17	71.9	1409	1602	-
14	3	17	94.6	1654	1117	1870
15	3	17	88	1362	1871	1881
16	3	17	86.3	1507	1210	1853
17	3	17	98.7	1806	1188	1795

802.11be (EHT80) 5530MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	53.9	1843	-	-
2	2	6	76.9	1553	1668	-
3	3	6	85.7	1090	1717	1602
4	1	6	62.1	1495	-	-
5	2	6	81.9	1856	1815	-
6	2	6	78.3	1325	1383	-
7	3	6	98.7	1569	1823	1570
8	1	6	54.2	1450	-	-
9	3	6	98.7	1560	1972	1336

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	78.7	1001	1526	-
2	2	13	71.4	1208	1707	-
3	3	13	99.3	1331	1434	1691
4	2	13	78.4	1786	1438	-
5	3	13	92.2	1837	1023	1384
6	1	13	62.1	1910	-	-
7	2	13	82.7	1539	1589	-
8	2	13	72.3	1727	1656	-
9	2	13	69	1494	1098	-
10	1	13	54.1	1231	-	-
11	2	13	68	1518	1253	-
12	3	13	97.5	1146	1004	1945
13	2	13	80.6	1523	1806	-
14	1	13	53.8	1401	-	-
15	3	13	96.6	1690	1379	1238

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_03

Number of Bursts in Trial: 17

Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	90.5	1814	1531	1644
2	2	16	77.4	1883	1410	-
3	1	16	58.7	1277	-	-
4	1	16	52.9	1389	-	-
5	2	16	67.8	1222	1487	-
6	3	16	98.8	1654	1933	1164
7	1	16	65.3	1660	-	-
8	2	16	67.1	1084	1684	-
9	1	16	65.9	1417	-	-
10	1	16	56.2	1846	-	-
11	3	16	99.4	1982	1096	1167
12	1	16	55.6	1958	-	-
13	2	16	82.1	1462	1994	-
14	3	16	95.6	1820	1380	1204
15	2	16	66.8	1764	1061	-
16	3	16	98.8	1630	1290	1349
17	1	16	62.1	1312	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_04

Number of Bursts in Trial: 11

Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	8	95.3	1852	1464	1855
2	1	8	63.6	1519	-	-
3	2	8	79.7	1911	1179	-
4	1	8	64.1	1703	-	-
5	2	8	80.1	1267	1525	-
6	2	8	79.8	1866	1579	-
7	2	8	81.3	1587	1089	-
8	1	8	65	1741	-	-
9	2	8	74.8	1922	1514	-
10	3	8	97	1106	1962	1674
11	3	8	99.6	1594	1465	1282

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_05

Number of Bursts in Trial: 16

Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	86.4	1352	1826	1882
2	1	15	64.3	1030	-	-
3	1	15	57	1073	-	-
4	2	15	73.4	1627	1414	-
5	2	15	73.1	1859	1364	-
6	3	15	89.2	1105	1810	1875
7	2	15	71.6	1831	1151	-
8	1	15	54.4	1188	-	-
9	2	15	69.6	1803	1648	-
10	3	15	95.8	1902	1686	1851
11	3	15	86.5	1415	1486	1165
12	3	15	99.9	1894	1537	1250
13	1	15	63.4	1957	-	-
14	1	15	54.3	1670	-	-
15	2	15	83.3	1871	1757	-
16	2	15	72.1	1100	1112	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_06

Number of Bursts in Trial: 15

Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	14	92.9	1948	1402	1642
2	1	14	56.5	1007	-	-
3	1	14	50.5	1215	-	-
4	2	14	76.7	1752	1237	-
5	1	14	52.2	1300	-	-
6	1	14	55.4	1938	-	-
7	1	14	55.8	1025	-	-
8	1	14	52.2	1873	-	-
9	2	14	66.9	1199	1565	-
10	2	14	74.2	1503	1124	-
11	2	14	82.4	1340	1391	-
12	1	14	60.4	1791	-	-
13	3	14	97.7	1377	1459	1442
14	2	14	77.4	1748	1333	-
15	3	14	87.9	1005	1493	1763

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.1	1262	1205	1159
2	1	20	51.8	1271	-	-
3	1	20	65.7	1513	-	-
4	2	20	80.8	1575	1095	-
5	1	20	51.6	1453	-	-
6	3	20	99.3	1736	1181	1963
7	2	20	76	1567	1000	-
8	2	20	82.6	1898	1251	-
9	3	20	93	1558	1974	1611
10	2	20	74	1445	1608	-
11	1	20	62.3	1011	-	-
12	2	20	79.1	1841	1265	-
13	1	20	66.4	1158	-	-
14	1	20	58.8	1722	-	-
15	1	20	63.8	1672	-	-
16	1	20	66.3	1232	-	-
17	1	20	59.8	1693	-	-
18	3	20	96.8	1792	1929	1256
19	1	20	57.7	1868	-	-
20	3	20	88.5	1472	1930	1305

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	58.5	1529	-	-
2	2	6	74.2	1661	1926	-
3	2	6	70.3	1789	1683	-
4	3	6	97.4	1807	1063	1799
5	2	6	80.9	1750	1777	-
6	1	6	58.5	1723	-	-
7	1	6	54.8	1774	-	-
8	1	6	56.4	1152	-	-
9	3	6	99	1819	1599	1847

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_09

Number of Bursts in Trial: 20

Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	56.7	1643	-	-
2	1	20	61.2	1685	-	-
3	1	20	56.8	1248	-	-
4	3	20	92.3	1530	1733	1317
5	1	20	57.9	1951	-	-
6	3	20	93.4	1270	1700	1893
7	3	20	98.1	1999	1781	1485
8	3	20	97.7	1203	1002	1780
9	2	20	73.6	1583	1287	-
10	2	20	81.7	1202	1701	-
11	2	20	72.8	1021	1225	-
12	2	20	66.9	1897	1172	-
13	2	20	74	1640	1110	-
14	1	20	57.5	1659	-	-
15	1	20	52.7	1274	-	-
16	3	20	89.9	1498	1310	1131
17	2	20	76.4	1193	1795	-
18	3	20	89.4	1840	1413	1360
19	3	20	93.4	1425	1715	1769
20	1	20	53.1	1971	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_10

Number of Bursts in Trial: 15

Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	57.8	1147	-	-
2	2	14	72.6	1491	1329	-
3	1	14	63.6	1298	-	-
4	3	14	89.9	1850	1320	1313
5	3	14	88.9	1651	1046	1509
6	2	14	79.4	1508	1422	-
7	2	14	68.8	1440	1351	-
8	2	14	81.6	1060	1034	-
9	2	14	68.4	1009	1952	-
10	3	14	99.9	1385	1428	1586
11	3	14	93.2	1581	1209	1942
12	3	14	94.5	1423	1988	1507
13	2	14	69.6	1273	1845	-
14	3	14	83.6	1062	1207	1771
15	3	14	86.3	1264	1143	1624

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_11

Number of Bursts in Trial: 13

Chirp Center Frequency: 5495.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	11	62.7	1940	-	-
2	1	11	55.5	1373	-	-
3	3	11	86.9	1400	1628	1019
4	1	11	58.5	1015	-	-
5	1	11	65.4	1316	-	-
6	1	11	65.8	1745	-	-
7	2	11	68.7	1879	1641	-
8	3	11	86.3	1724	1016	1236
9	1	11	65.1	1255	-	-
10	3	11	84.9	1252	1761	1371
11	2	11	71.6	1804	1285	-
12	3	11	84.5	1696	1896	1838
13	1	11	66.6	1542	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_12

Number of Bursts in Trial: 20

Chirp Center Frequency: 5499.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	67.5	1361	1749	-
2	1	20	57.5	1490	-	-
3	1	20	54.5	1210	-	-
4	2	20	69.1	1353	1065	-
5	1	20	61.4	1829	-	-
6	1	20	53.2	1631	-	-
7	3	20	91.1	1909	1622	1688
8	3	20	84.1	1556	1931	1350
9	3	20	97.6	1732	1049	1176
10	2	20	67	1805	1784	-
11	1	20	53.3	1844	-	-
12	2	20	78.5	1878	1941	-
13	2	20	74.6	1408	1559	-
14	1	20	66.4	1108	-	-
15	2	20	79.2	1228	1808	-
16	2	20	73.7	1918	1040	-
17	3	20	88.5	1334	1137	1309
18	2	20	78.4	1058	1953	-
19	3	20	97.4	1219	1263	1540
20	3	20	90.4	1905	1304	1891

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_13

Number of Bursts in Trial: 15

Chirp Center Frequency: 5496.83MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	14	71.3	1768	1620	-
2	3	14	90	1991	1097	1031
3	3	14	84.3	1114	1013	1276
4	3	14	89.5	1148	1625	1042
5	2	14	80.9	1242	1234	-
6	2	14	78	1032	1076	-
7	3	14	87.4	1489	1121	1979
8	3	14	89.2	1411	1221	1357
9	3	14	86.4	1614	1239	1964
10	3	14	98.5	1120	1045	1220
11	1	14	55	1033	-	-
12	2	14	67.3	1163	1430	-
13	3	14	94.9	1180	1824	1047
14	1	14	52.2	1900	-	-
15	1	14	64	1460	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_14

Number of Bursts in Trial: 18

Chirp Center Frequency: 5498.43MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.9	1418	-	-
2	3	18	95.4	1895	1330	1793
3	2	18	74	1754	1323	-
4	2	18	83.1	1444	1506	-
5	1	18	66.3	1877	-	-
6	3	18	92.6	1839	1544	1751
7	1	18	52.1	1816	-	-
8	1	18	65.1	1917	-	-
9	3	18	88.5	1241	1758	1315
10	3	18	83.5	1623	1969	1538
11	2	18	80	1224	1580	-
12	3	18	90.9	1725	1658	1372
13	3	18	99.4	1269	1564	1973
14	3	18	89.5	1314	1916	1711
15	1	18	62.5	1573	-	-
16	2	18	76.7	1574	1731	-
17	1	18	56.5	1716	-	-
18	2	18	74.2	1469	1734	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5494.43MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	8	94.2	1861	1662	1550
2	3	8	95.3	1367	1244	1093
3	2	8	77.6	1697	1578	-
4	2	8	73.2	1038	1704	-
5	1	8	65	1908	-	-
6	3	8	88.3	1070	1610	1981
7	3	8	83.4	1864	1788	1286
8	1	8	65.9	1053	-	-
9	1	8	51.8	1322	-	-
10	3	8	97.8	1129	1949	1618
11	3	8	99.2	1141	1996	1997

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5497.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	15	62	1880	-	-
2	3	15	86	1133	1136	1399
3	3	15	83.6	1196	1600	1201
4	2	15	72.3	1484	1054	-
5	1	15	52.4	1778	-	-
6	2	15	68.2	1258	1052	-
7	2	15	78.3	1431	1397	-
8	1	15	64.4	1961	-	-
9	3	15	95.3	1454	1676	1616
10	2	15	81.1	1471	1192	-
11	3	15	97.8	1767	1652	1461
12	2	15	69.2	1126	1742	-
13	2	15	74.9	1987	1407	-
14	3	15	95.9	1387	1737	1562
15	1	15	56	1102	-	-
16	1	15	50.8	1947	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5496.03MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	87.2	1775	1637	1111
2	3	12	88.1	1985	1449	1326
3	3	12	99.7	1719	1666	1657
4	2	12	73.8	1406	1227	-
5	2	12	71.8	1800	1119	-
6	3	12	98.5	1521	1059	1257
7	3	12	93.2	1710	1099	1343
8	1	12	50.7	1629	-	-
9	1	12	56.9	1821	-	-
10	3	12	86.5	1606	1139	1884
11	3	12	87.8	1946	1477	1904
12	2	12	80.3	1566	1324	-
13	3	12	85.8	1156	1128	1582

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	99.7	1067	1134	1919
2	1	11	50.4	1022	-	-
3	3	11	90.8	1026	1044	1500
4	1	11	54.3	1740	-	-
5	1	11	66	1639	-	-
6	2	11	76.5	1341	1726	-
7	3	11	97.5	1072	1832	1812
8	3	11	96.4	1346	1718	1050
9	2	11	68.5	1813	1480	-
10	3	11	96.9	1153	1008	1451
11	2	11	71.2	1439	1378	-
12	3	11	84.2	1977	1729	1532

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_19

Number of Bursts in Trial: 9

Chirp Center Frequency: 5493.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	62.2	1479	-	-
2	1	6	61.2	1597	-	-
3	3	6	93.2	1278	1944	1664
4	3	6	96.4	1598	1254	1229
5	2	6	76.1	1233	1113	-
6	1	6	52.7	1746	-	-
7	2	6	77.4	1568	1348	-
8	1	6	59	1223	-	-
9	3	6	87.4	1928	1937	1214

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_20

Number of Bursts in Trial: 12

Chirp Center Frequency: 5495.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	96.3	1520	1936	1885
2	2	10	77.8	1082	1039	-
3	1	10	52.1	1184	-	-
4	2	10	74	1375	1753	-
5	2	10	77.3	1296	1321	-
6	1	10	63.5	1426	-	-
7	3	10	92.9	1029	1932	1194
8	2	10	82.9	1770	1335	-
9	1	10	65.4	1548	-	-
10	1	10	66	1901	-	-
11	2	10	80.5	1382	1915	-
12	3	10	98	1955	1980	1370

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5560.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	78.6	1796	1593	-
2	3	20	95.7	1601	1198	1217
3	2	20	80.7	1051	1633	-
4	1	20	57	1609	-	-
5	1	20	64.8	1655	-	-
6	1	20	58.8	1511	-	-
7	2	20	69.3	1645	1869	-
8	1	20	58.5	1249	-	-
9	1	20	54.5	1621	-	-
10	2	20	68.6	1302	1416	-
11	3	20	91.2	1437	1394	1466
12	2	20	78.4	1603	1721	-
13	3	20	89.6	1496	1104	1347
14	1	20	59.6	1617	-	-
15	3	20	87.3	1966	1552	1970
16	3	20	100	1432	1366	1802
17	1	20	54.4	1470	-	-
18	2	20	80.9	1281	1420	-
19	3	20	83.8	1359	1327	1481
20	1	20	60.3	1457	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_22

Number of Bursts in Trial: 15

Chirp Center Frequency: 5563.05MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	14	71.3	1017	1344	-
2	3	14	98.5	1037	1171	1355
3	1	14	53.4	1547	-	-
4	2	14	72.6	1197	1607	-
5	3	14	88.6	1794	1175	1892
6	2	14	80.4	1595	1694	-
7	3	14	88.7	1014	1773	1433
8	1	14	63	1499	-	-
9	1	14	54.5	1027	-	-
10	1	14	63.5	1405	-	-
11	1	14	53	1299	-	-
12	2	14	80.9	1056	1303	-
13	3	14	90.8	1743	1115	1517
14	3	14	86.3	1259	1649	1663
15	3	14	83.6	1533	1699	1332

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_23

Number of Bursts in Trial: 9

Chirp Center Frequency: 5566.25MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	65.6	1886	-	-
2	1	6	62.5	1279	-	-
3	3	6	89.3	1140	1474	1283
4	1	6	61.2	1571	-	-
5	3	6	93.9	1081	1834	1240
6	1	6	58	1890	-	-
7	1	6	50.4	1702	-	-
8	2	6	82.9	1638	1635	-
9	2	6	77.6	1354	1669	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_24

Number of Bursts in Trial: 20

Chirp Center Frequency: 5561.05MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	86.6	1543	1083	1888
2	2	19	73.8	1246	1342	-
3	3	19	84.4	1956	1920	1122
4	2	19	67.7	1376	1182	-
5	2	19	76.2	1925	1667	-
6	3	19	93	1291	1555	1189
7	2	19	78.4	1012	1546	-
8	3	19	84.6	1369	1132	1766
9	2	19	82.3	1943	1455	-
10	2	19	70.1	1160	1103	-
11	2	19	76.7	1458	1720	-
12	2	19	80.2	1363	1671	-
13	3	19	92.3	1673	1288	2000
14	1	19	58	1835	-	-
15	2	19	68.5	1572	1135	-
16	3	19	84.5	1091	1272	1035
17	2	19	70.2	1289	1028	-
18	1	19	56.2	1130	-	-
19	1	19	53.9	1881	-	-
20	3	19	91	1678	1782	1551

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_25

Number of Bursts in Trial: 18

Chirp Center Frequency: 5561.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	17	65.6	1809	-	-
2	1	17	60.3	1435	-	-
3	3	17	87.7	1858	1446	1849
4	1	17	53.3	1116	-	-
5	2	17	76	1162	1924	-
6	2	17	71.7	1554	1790	-
7	3	17	87.4	1787	1306	1421
8	1	17	65.1	1677	-	-
9	2	17	69.6	1906	1862	-
10	3	17	90	1154	1107	1739
11	1	17	52.2	1535	-	-
12	2	17	70.9	1527	1109	-
13	1	17	65.6	1125	-	-
14	2	17	75.8	1830	1613	-
15	3	17	86	1825	1475	1284
16	1	17	64.8	1992	-	-
17	3	17	96	1993	1899	1396
18	2	17	70.9	1142	1381	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_26

Number of Bursts in Trial: 15

Chirp Center Frequency: 5563.45MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	86.8	1168	1968	1297
2	1	13	61.6	1965	-	-
3	3	13	85.1	1604	1118	1057
4	2	13	68.5	1524	1266	-
5	3	13	98.7	1989	1218	1584
6	2	13	70.6	1939	1187	-
7	1	13	59.5	1967	-	-
8	1	13	53.3	1245	-	-
9	2	13	73.4	1356	1665	-
10	1	13	54.4	1216	-	-
11	2	13	70.8	1086	1647	-
12	2	13	76.8	1452	1169	-
13	2	13	73.6	1195	1502	-
14	1	13	51.8	1328	-	-
15	3	13	96.5	1374	1515	1728

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5565.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	7	91.9	1590	1612	1068
2	1	7	62	1687	-	-
3	2	7	76.3	1854	1822	-
4	3	7	86.1	1123	1488	1088
5	2	7	81.1	1619	1427	-
6	3	7	91.7	1268	1393	1907
7	1	7	54.5	1680	-	-
8	1	7	55.5	1041	-	-
9	1	7	63.3	1476	-	-
10	1	7	64.9	1145	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5566.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.4	1735	1934	1679
2	2	5	67.9	1983	1776	-
3	1	5	55.7	1797	-	-
4	1	5	64.6	1561	-	-
5	1	5	66.4	1923	-	-
6	2	5	72.1	1585	1436	-
7	1	5	53.6	1211	-	-
8	3	5	88.5	1675	1653	1914

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_29

Number of Bursts in Trial: 12

Chirp Center Frequency: 5564.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	99.3	1995	1522	1150
2	2	10	69.4	1235	1185	-
3	3	10	92.4	1534	1018	1865
4	1	10	55.9	1785	-	-
5	3	10	97.1	1443	1681	1738
6	1	10	61.7	1921	-	-
7	2	10	67.1	1646	1412	-
8	3	10	93.8	1747	1339	1959
9	2	10	72.6	1863	1010	-
10	3	10	98.4	1020	1368	1473
11	2	10	82.9	1913	1505	-
12	3	10	94.4	1247	1392	1213

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_30

Number of Bursts in Trial: 20

Chirp Center Frequency: 5560.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	92.9	1395	1069	1765
2	1	20	66.3	1848	-	-
3	1	20	50.4	1260	-	-
4	2	20	74.5	1085	1055	-
5	2	20	73.7	1177	1186	-
6	1	20	63.7	1448	-	-
7	1	20	59.7	1409	-	-
8	2	20	78.8	1978	1230	-
9	1	20	64.9	1087	-	-
10	2	20	79.2	1650	1730	-
11	2	20	82.3	1077	1456	-
12	1	20	56.1	1003	-	-
13	2	20	71.8	1155	1759	-
14	1	20	53.5	1950	-	-
15	1	20	56.3	1292	-	-
16	1	20	52.7	1074	-	-
17	1	20	53.8	1483	-	-
18	3	20	88.8	1036	1817	1467
19	1	20	56.9	1386	-	-
20	2	20	82.4	1762	1173	-

802.11be (EHT160) 5250MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 8						
Chirp Center Frequency: 5290MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	51.6	1166	-	-
2	3	5	87.3	1755	1186	1281
3	2	5	78.9	1685	1660	-
4	3	5	85.9	1960	1413	1924
5	1	5	63.2	1642	-	-
6	2	5	80	1608	1495	-
7	1	5	54.7	1869	-	-
8	3	5	93.3	1407	1808	1899

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_02						
Number of Bursts in Trial: 17						
Chirp Center Frequency: 5290MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	70.5	1595	1554	-
2	3	16	84.8	1971	1245	1923
3	3	16	98.9	1458	1596	1297
4	1	16	55.2	1358	-	-
5	3	16	93.2	1486	1014	1435
6	3	16	89.7	1510	1922	1747
7	1	16	58.4	1101	-	-
8	3	16	93.8	1800	1109	1339
9	2	16	78.3	1827	1261	-
10	3	16	86.4	1829	1296	1844
11	2	16	72.3	1070	1059	-
12	3	16	96.6	1644	1845	1709
13	2	16	77.1	1366	1625	-
14	1	16	53.2	1917	-	-
15	3	16	90.2	1505	1819	1674
16	1	16	56.3	1913	-	-
17	1	16	64.5	1016	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_03

Number of Bursts in Trial: 15

Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	14	69.8	1369	1963	-
2	3	14	91.7	1412	1891	1925
3	1	14	64.4	1452	-	-
4	1	14	54.2	1778	-	-
5	3	14	99.4	1905	1255	1897
6	1	14	63.5	1507	-	-
7	2	14	75.1	1950	1760	-
8	3	14	83.6	1813	1469	1072
9	3	14	90	1334	1980	1928
10	1	14	50.6	1403	-	-
11	1	14	56.5	1853	-	-
12	3	14	83.9	1652	1954	1707
13	2	14	72.4	1904	1120	-
14	3	14	91.1	1773	1258	1103
15	2	14	79.4	1073	1190	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_04

Number of Bursts in Trial: 17

Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.1	1784	1742	-
2	1	16	66.1	1888	-	-
3	1	16	53.3	1180	-	-
4	2	16	77.1	1938	1338	-
5	1	16	61.6	1630	-	-
6	3	16	99.1	1319	1420	1057
7	1	16	53.4	1749	-	-
8	3	16	94.5	1591	1761	1814
9	2	16	77	1448	1433	-
10	3	16	91.9	1485	1949	1238
11	1	16	59.2	1868	-	-
12	1	16	62.8	1771	-	-
13	1	16	55.2	1564	-	-
14	1	16	57.1	1460	-	-
15	1	16	57.9	1437	-	-
16	3	16	98.5	1021	1332	1508
17	3	16	97.1	1005	1647	1405

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	72.5	1824	1317	-
2	2	9	71.3	1419	1271	-
3	3	9	93.5	1927	1542	1389
4	3	9	88.4	1998	1603	1276
5	3	9	90.4	1337	1686	1205
6	3	9	89.1	1116	1396	1514
7	2	9	71.2	1832	1325	-
8	2	9	71.3	1078	1620	-
9	2	9	73.8	1379	1169	-
10	2	9	71.6	1224	1577	-
11	1	9	53.1	1975	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	14	89.1	1754	1570	1298
2	1	14	51.8	1397	-	-
3	1	14	59.8	1314	-	-
4	1	14	55.9	1775	-	-
5	3	14	95.4	1654	1178	1274
6	3	14	92.9	1590	1140	1159
7	2	14	75.4	1599	1964	-
8	1	14	61	1085	-	-
9	3	14	99.9	1321	1880	1820
10	1	14	63	1931	-	-
11	3	14	94.8	1935	1822	1038
12	1	14	65.4	1698	-	-
13	1	14	66.3	1618	-	-
14	3	14	97.2	1250	1300	1350
15	3	14	87.4	1569	1637	1681

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_07

Number of Bursts in Trial: 9

Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	62.4	1305	-	-
2	3	6	90.1	1132	1023	1943
3	1	6	50.6	1280	-	-
4	2	6	69.8	1095	1803	-
5	2	6	76.5	1177	1692	-
6	2	6	82.1	1034	1131	-
7	1	6	52.2	1782	-	-
8	1	6	59.4	1243	-	-
9	1	6	61.3	1387	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_08

Number of Bursts in Trial: 19

Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	51.1	1139	-	-
2	3	18	97.6	1861	1973	1480
3	3	18	91	1468	1634	1206
4	2	18	80.8	1735	1911	-
5	2	18	77	1345	1543	-
6	2	18	82.2	1043	1592	-
7	1	18	55.7	1662	-	-
8	3	18	87.9	1061	1547	1427
9	2	18	77.5	1028	1977	-
10	1	18	50.2	1479	-	-
11	1	18	55.4	1077	-	-
12	2	18	75.2	1896	1239	-
13	2	18	82	1516	1039	-
14	1	18	53.3	1909	-	-
15	2	18	67.5	1918	1628	-
16	1	18	62.3	1161	-	-
17	2	18	81.7	1491	1851	-
18	3	18	97	1204	1242	1666
19	3	18	98.6	1074	1439	1711

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	84.1	1889	1902	1374
2	2	11	77.8	1323	1488	-
3	1	11	55.8	1881	-	-
4	2	11	77.1	1967	1833	-
5	3	11	91.3	1207	1615	1839
6	1	11	53	1482	-	-
7	2	11	76.7	1118	1962	-
8	2	11	81.1	1536	1382	-
9	2	11	70.7	1996	1821	-
10	1	11	53.9	1722	-	-
11	3	11	95.1	1370	1956	1430
12	2	11	71.1	1040	1621	-
13	3	11	86.8	1260	1942	1667

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	92.5	1215	1237	1449
2	3	16	98.5	1106	1629	1241
3	1	16	54.7	1526	-	-
4	3	16	97.8	1287	1114	1983
5	1	16	51.9	1156	-	-
6	3	16	94.7	1348	1086	1504
7	3	16	84	1019	1247	1764
8	2	16	67.7	1879	1568	-
9	1	16	57.2	1167	-	-
10	1	16	56.9	1579	-	-
11	3	16	88	1143	1431	1006
12	1	16	66.1	1376	-	-
13	3	16	91.7	1890	1461	1445
14	1	16	62.2	1734	-	-
15	2	16	80.4	1984	1846	-
16	3	16	86.8	1688	1093	1137
17	2	16	83.1	1244	1856	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	57.4	1751	-	-
2	3	20	94.9	1588	1664	1221
3	3	20	85.2	1728	1457	1540
4	1	20	53.6	1083	-	-
5	2	20	75.4	1635	1534	-
6	3	20	83.6	1993	1847	1837
7	3	20	95.3	1490	1574	1451
8	2	20	70.5	1710	1265	-
9	3	20	99.8	1920	1559	1037
10	2	20	77.7	1372	1283	-
11	1	20	50.3	1108	-	-
12	1	20	51	1901	-	-
13	3	20	85.1	1830	1257	1790
14	3	20	83.9	1727	1353	1519
15	2	20	82.4	1731	1113	-
16	2	20	79.1	1631	1063	-
17	2	20	68.6	1690	1498	-
18	2	20	82.7	1102	1857	-
19	3	20	83.5	1555	1181	1792
20	3	20	98.6	1658	1294	1529

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5252.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	69.8	1377	1958	-
2	1	6	60.4	1900	-	-
3	3	6	87.1	1999	1421	1053
4	1	6	62.9	1527	-	-
5	2	6	80.9	1840	1648	-
6	2	6	76.8	1277	1456	-
7	2	6	70.9	1737	1096	-
8	2	6	67.8	1594	1249	-
9	1	6	61	1470	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_13

Number of Bursts in Trial: 19

Chirp Center Frequency: 5257.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	99.6	1422	1188	1770
2	3	18	90.9	1898	1362	1172
3	3	18	96.3	1216	1182	1831
4	3	18	94.4	1538	1295	1130
5	3	18	87.6	1184	1198	1557
6	3	18	96.6	1160	1128	1641
7	1	18	50.2	1748	-	-
8	3	18	86	1811	1906	1944
9	2	18	83.2	1286	1601	-
10	2	18	67	1195	1772	-
11	1	18	64.9	1593	-	-
12	1	18	59.5	1515	-	-
13	2	18	77.3	1478	1756	-
14	1	18	52.2	1966	-	-
15	2	18	66.9	1987	1788	-
16	3	18	83.7	1697	1275	1033
17	1	18	66.6	1163	-	-
18	2	18	72.2	1417	1617	-
19	2	18	73	1001	1443	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_14

Number of Bursts in Trial: 18

Chirp Center Frequency: 5256.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	17	55.5	1269	-	-
2	3	17	87.1	1560	1278	1759
3	2	17	73	1217	1009	-
4	2	17	79.5	1069	1706	-
5	3	17	97	1638	1714	1175
6	3	17	88.2	1946	1473	1522
7	1	17	63.3	1873	-	-
8	3	17	97.1	1162	1299	1384
9	1	17	57.8	1122	-	-
10	2	17	72.2	1986	1313	-
11	2	17	72.7	1214	1582	-
12	3	17	98.7	1324	1000	1030
13	1	17	62.7	1318	-	-
14	2	17	77.5	1459	1838	-
15	1	17	59.4	1606	-	-
16	1	17	50.1	1740	-	-
17	3	17	86.9	1444	1232	1268
18	1	17	54	1929	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_15

Number of Bursts in Trial: 10

Chirp Center Frequency: 5252.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	56.7	1867	-	-
2	3	7	97.5	1597	1171	1758
3	3	7	87.3	1492	1895	1055
4	2	7	82.2	1997	1464	-
5	3	7	93.1	1733	1818	1267
6	3	7	85.5	1939	1805	1948
7	1	7	65.7	1646	-	-
8	2	7	68.6	1680	1024	-
9	3	7	89.1	1549	1567	1650
10	3	7	92.6	1066	1133	1236

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5257.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	58.2	1655	-	-
2	2	18	70.1	1346	1127	-
3	2	18	79.2	1098	1537	-
4	1	18	64.3	1111	-	-
5	1	18	54.5	1753	-	-
6	3	18	97.9	1600	1354	1371
7	1	18	62.3	1209	-	-
8	2	18	74	1196	1071	-
9	2	18	76.6	1327	1062	-
10	1	18	61.4	1675	-	-
11	3	18	99.4	1952	1801	1291
12	1	18	56.2	1704	-	-
13	2	18	74.3	1539	1781	-
14	3	18	99.6	1936	1282	1222
15	3	18	92.5	1716	1720	1360
16	1	18	63.7	1342	-	-
17	1	18	60.5	1691	-	-
18	2	18	68.4	1797	1990	-
19	1	18	52.1	1659	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5255.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	14	82.1	1969	1126	-
2	2	14	67.8	1292	1494	-
3	1	14	52	1359	-	-
4	2	14	80.1	1380	1425	-
5	2	14	79.7	1741	1344	-
6	1	14	59.9	1573	-	-
7	2	14	74.8	1679	1767	-
8	3	14	85.7	1200	1309	1183
9	2	14	73.4	1604	1744	-
10	3	14	94	1170	1870	1945
11	3	14	87.6	1826	1941	1087
12	1	14	63.7	1150	-	-
13	2	14	78.3	1884	1483	-
14	3	14	99.1	1411	1440	1978
15	2	14	70.8	1414	1937	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5256.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	88.8	1383	1363	1624
2	3	16	87.7	1404	1194	1626
3	3	16	93.1	1165	1220	1695
4	1	16	58.4	1121	-	-
5	3	16	94.1	1586	1976	1798
6	1	16	64.9	1065	-	-
7	1	16	65.1	1933	-	-
8	3	16	85.5	1528	1223	1424
9	2	16	73.5	1434	1794	-
10	2	16	75.4	2000	1064	-
11	1	16	54.6	1957	-	-
12	1	16	50.4	1097	-	-
13	2	16	73.1	1717	1705	-
14	3	16	87.8	1556	1089	1683
15	3	16	89.8	1462	1651	1872
16	2	16	79.4	1264	1836	-
17	2	16	75	1816	1672	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5254.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	97.4	1892	1739	1893
2	1	12	66.4	1548	-	-
3	1	12	57	1940	-	-
4	2	12	74.7	1912	1616	-
5	1	12	56.1	1048	-	-
6	3	12	90	1329	1612	1225
7	3	12	99.6	1776	1211	1285
8	1	12	54.3	1532	-	-
9	2	12	79.8	1248	1584	-
10	1	12	62.1	1060	-	-
11	3	12	89	1804	1056	1168
12	2	12	80.1	1520	1777	-
13	3	12	89.1	1607	1084	1842

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_20

Number of Bursts in Trial: 20

Chirp Center Frequency: 5257.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	97.7	1563	1968	1025
2	2	19	71	1036	1850	-
3	1	19	57.1	1915	-	-
4	1	19	53.5	1032	-	-
5	1	19	60.7	1903	-	-
6	1	19	54.7	1499	-	-
7	2	19	70.7	1703	1423	-
8	1	19	52	1409	-	-
9	2	19	74.3	1484	1049	-
10	3	19	87.3	1333	1031	1320
11	2	19	66.9	1860	1303	-
12	2	19	82.3	1125	1441	-
13	2	19	78.5	1436	1290	-
14	1	19	54.7	1146	-	-
15	2	19	75	1388	1684	-
16	1	19	59.4	1210	-	-
17	1	19	51.6	1663	-	-
18	3	19	98	1791	1155	1375
19	3	19	83.6	1226	1552	1193
20	1	19	64.5	1862	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_21

Number of Bursts in Trial: 15

Chirp Center Frequency: 5322.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	62.6	1465	-	-
2	1	13	66.4	1187	-	-
3	1	13	61.9	1293	-	-
4	3	13	92.1	1763	1848	1176
5	3	13	96.1	1385	1463	1614
6	2	13	82.6	1010	1112	-
7	3	13	97.8	1144	1500	1330
8	3	13	93.5	1885	1787	1227
9	1	13	54	1531	-	-
10	1	13	64.3	1003	-	-
11	1	13	52.8	1107	-	-
12	2	13	76.2	1795	1632	-
13	1	13	55.4	1545	-	-
14	3	13	84.5	1015	1135	1489
15	2	13	77.8	1585	1730	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_22

Number of Bursts in Trial: 8

Chirp Center Frequency: 5325.43MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	6	83.7	1392	1815	1018
2	3	6	93.4	1189	1129	1736
3	2	6	69.6	1266	1141	-
4	2	6	77.1	1972	1474	-
5	3	6	85.1	1022	1233	1828
6	1	6	58.6	1965	-	-
7	2	6	72.9	1246	1955	-
8	2	6	73	1511	1312	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_23

Number of Bursts in Trial: 18

Chirp Center Frequency: 5321.03MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	17	79.2	1415	1475	-
2	3	17	90.2	1454	1825	1378
3	3	17	92.5	1878	1328	1447
4	2	17	77.6	1410	1581	-
5	3	17	85.3	1627	1779	1572
6	2	17	74.6	1124	1715	-
7	3	17	95	1251	1029	1174
8	2	17	78.2	1007	1669	-
9	1	17	64.2	1361	-	-
10	1	17	55.3	1562	-	-
11	1	17	65.5	1875	-	-
12	2	17	76.5	1991	1153	-
13	2	17	81.3	1877	1418	-
14	1	17	59.1	1185	-	-
15	1	17	65	1907	-	-
16	1	17	57.5	1762	-	-
17	2	17	78.2	1340	1517	-
18	1	17	56.9	1521	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_24

Number of Bursts in Trial: 9

Chirp Center Frequency: 5325.03MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	77.2	1115	1110	-
2	3	7	98.1	1932	1865	1583
3	1	7	60	1438	-	-
4	3	7	84.5	1429	1367	1272
5	3	7	90.7	1228	1203	1947
6	2	7	76.9	1575	1315	-
7	3	7	94.1	1310	1859	1270
8	2	7	77	1149	1745	-
9	3	7	91.4	1076	1020	1477

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5324.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	66	1970	-	-
2	2	9	82.1	1780	1525	-
3	2	9	70.9	1119	1432	-
4	3	9	98.6	1279	1653	1874
5	1	9	55.8	1503	-	-
6	3	9	89.7	1123	1506	1213
7	3	9	93.4	1202	1501	1665
8	2	9	82.8	1887	1725	-
9	1	9	51.9	1571	-	-
10	1	9	53.6	1718	-	-
11	1	9	54.9	2000	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5323.43MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	11	62.4	1694	-	-
2	2	11	68.9	1307	1513	-
3	1	11	59	1273	-	-
4	3	11	86.1	1678	1995	1849
5	3	11	88.7	1613	1750	1090
6	2	11	70.8	1142	1589	-
7	3	11	90	1806	1930	1017
8	1	11	58	1151	-	-
9	3	11	96.5	1218	1619	1252
10	2	11	74.6	1050	1231	-
11	2	11	78.4	1611	1640	-
12	1	11	62	1004	-	-
13	3	11	98.9	1026	1852	1075

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_27

Number of Bursts in Trial: 18

Chirp Center Frequency: 5320.63MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	18	78.1	1622	1841	-
2	2	18	81.5	1951	1668	-
3	2	18	74.8	1068	1311	-
4	1	18	63	1002	-	-
5	3	18	94.7	1173	1682	1823
6	3	18	99.5	1351	1496	1335
7	1	18	65.6	1288	-	-
8	3	18	83.6	1863	1254	1395
9	1	18	58.3	1598	-	-
10	2	18	83.2	1229	1609	-
11	2	18	78.9	1677	1154	-
12	3	18	96.2	1693	1992	1088
13	3	18	93.4	1858	1219	1466
14	1	18	56.8	1051	-	-
15	1	18	59.6	1757	-	-
16	3	18	86.8	1523	1347	1044
17	3	18	87.9	1105	1442	1752
18	2	18	76.3	1011	1835	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_28

Number of Bursts in Trial: 11

Chirp Center Frequency: 5324.23MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.1	1676	-	-
2	1	9	53.9	1886	-	-
3	2	9	73.2	1331	1067	-
4	3	9	94.5	1408	1636	1864
5	1	9	58.2	1381	-	-
6	3	9	89	1393	1199	1713
7	2	9	73.9	1673	1336	-
8	3	9	95.9	1145	1894	1148
9	2	9	69.8	1398	1446	-
10	3	9	86.9	1544	1766	1774
11	3	9	86	1812	1399	1045

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_29

Number of Bursts in Trial: 9

Chirp Center Frequency: 5325.43MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	80.5	1524	1394	-
2	2	6	66.8	1876	1455	-
3	3	6	87.7	1134	1843	1046
4	2	6	70	1138	1656	-
5	2	6	72	1726	1566	-
6	2	6	70.5	1610	1633	-
7	2	6	74.4	1406	1355	-
8	1	6	64.9	1959	-	-
9	2	6	80.4	1926	1550	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_30

Number of Bursts in Trial: 20

Chirp Center Frequency: 5319.83MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	88.1	1541	1796	1012
2	1	20	52.4	1989	-	-
3	3	20	88.1	1602	1472	1208
4	2	20	71.3	1908	1365	-
5	1	20	54.1	1981	-	-
6	3	20	85.7	1284	1164	1533
7	2	20	80.2	1054	1883	-
8	3	20	90	1081	1091	1157
9	3	20	95.4	1058	1042	1343
10	1	20	64	1373	-	-
11	2	20	80.3	1871	1910	-
12	2	20	71.3	1326	1306	-
13	1	20	58.6	1765	-	-
14	3	20	98.3	1565	1687	1783
15	1	20	65.2	1262	-	-
16	1	20	58.1	1699	-	-
17	2	20	75.7	1352	1551	-
18	3	20	83.6	1201	1341	1979
19	2	20	73.2	1082	1580	-
20	3	20	85.9	1639	1259	1212

802.11be (EHT160) 5570MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_03

Number of Bursts in Trial: 11

Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_04

Number of Bursts in Trial: 20

Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 15
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 12
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5498.18MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_12

Number of Bursts in Trial: 19

Chirp Center Frequency: 5499.38MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_13

Number of Bursts in Trial: 15

Chirp Center Frequency: 5496.98MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_14

Number of Bursts in Trial: 12

Chirp Center Frequency: 5495.78MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_15

Number of Bursts in Trial: 19

Chirp Center Frequency: 5498.98MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5496.58MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499.78MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495.78MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5496.58MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_20

Number of Bursts in Trial: 12

Chirp Center Frequency: 5495.78MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_21

Number of Bursts in Trial: 16

Chirp Center Frequency: 5641.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5643.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5639.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5642.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5642.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_26

Number of Bursts in Trial: 8

Chirp Center Frequency: 5645.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_27

Number of Bursts in Trial: 17

Chirp Center Frequency: 5640.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_28

Number of Bursts in Trial: 19

Chirp Center Frequency: 5639.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_29

Number of Bursts in Trial: 12

Chirp Center Frequency: 5643.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_30

Number of Bursts in Trial: 18

Chirp Center Frequency: 5640.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT240) 5610MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 15						
Chirp Center Frequency: 5610MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_02						
Number of Bursts in Trial: 8						
Chirp Center Frequency: 5610MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 11
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 20
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_05

Number of Bursts in Trial: 17

Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_06

Number of Bursts in Trial: 14

Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_09

Number of Bursts in Trial: 14

Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_10

Number of Bursts in Trial: 8

Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5496.75MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_12

Number of Bursts in Trial: 19

Chirp Center Frequency: 5497.95MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_13

Number of Bursts in Trial: 15

Chirp Center Frequency: 5495.55MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_14

Number of Bursts in Trial: 12

Chirp Center Frequency: 5494.35MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_15

Number of Bursts in Trial: 19

Chirp Center Frequency: 5497.55MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.15MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498.35MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.35MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.15MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.35MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5718.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5720.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5716.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5719.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5720MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_26

Number of Bursts in Trial: 8

Chirp Center Frequency: 5722.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_27

Number of Bursts in Trial: 17

Chirp Center Frequency: 5718MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_28

Number of Bursts in Trial: 19

Chirp Center Frequency: 5716.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_29

Number of Bursts in Trial: 12

Chirp Center Frequency: 5720.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5717.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

-- END --