

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBBQZ-WTW-P25090545-3

FCC ID: PY325400656

Product: Orbi Outdoor Satellite

Brand: NETGEAR

Model No.: RBE300Y (Satellite)

Received Date: 2025/12/11

Test Date: 2025/3/5 ~ 2026/3/15

Issued Date: 2026/4/9

Applicant and Manufacturer: NETGEAR, INC.

Address: 3553 N 1ST ST SAN JOSE, CA 95134, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:

Approved by:

Jeremy Lin

, Date:

2026/4/9

Jeremy Lin / Project Engineer

This test report consists of 177 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Vera Huang / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	7
3.3 EUT Power Level.....	8
4 Test Instruments	9
4.1 U-NII Detection Bandwidth	9
4.2 Channel Availability Check Time	9
4.3 Channel Closing Transmission and Channel Move Time	9
4.4 Non-Occupancy Period	9
4.5 Statistical Performance Check	9
5 Limits of Test Items.....	10
5.1 Working Modes and Required Test Items	10
5.2 Test Limits and Radar Signal Parameters	11
6 Test Arrangements.....	14
6.1 Test Setup.....	14
6.2 Test Procedure	15
6.2.1 DFS Measurement System.....	15
6.2.2 Calibration of DFS Detection Threshold Level.....	18
6.2.3 DFS Detection Threshold.....	19
6.2.4 DFS Companion Device	24
7 Test Results of Test Item	25
7.1 U-NII Detection Bandwidth	25
7.2 Channel Availability Check Time	33
7.3 Channel Closing Transmission and Channel Move Time	35
7.4 Non-Occupancy Period	40
7.5 Statistical Performance Check	42
8 Declaration of Conformity by the Manufacturer	79
8.1 Transmit Power Control (TPC)	79
8.2 Statement of Manufacturer	79
9 Pictures of Test Arrangements	80
10 Information of the Testing Laboratories	81
11 Appendix.....	82
11.1 Radar Test Signal	82

Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P25090545-3	Original Release	2026/4/9

1 Certificate

Product: Orbi Outdoor Satellite

Brand: NETGEAR

Test Model: RBE300Y (Satellite)

Sample Status: Engineering sample

Applicant and Manufacturer: NETGEAR, INC.

Test Date: 2025/3/5 ~ 2026/3/15

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(h)	U-NII Detection Bandwidth	Pass	Applicable
15.407(h)	Channel Availability Check Time	Pass	Applicable
15.407(h)	Channel Closing Transmission and Channel Move Time	Pass	Applicable
15.407(h)	Non-Occupancy Period	Pass	Applicable
15.407(h)	Statistical Performance Check	Pass	Applicable
15.407(h)	Non-Associated Test	N/A	Not Applicable

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Orbi Outdoor Satellite
Brand	NETGEAR
Test Model	RBE300Y (Satellite)
DFS Firmware/software version	RBE300Y QSDK IPQ5322.ILQ.12.5 CSU1 hardware verification U-Boot V0.0.14_rc1 (chipcode: r12.5_00009.0)
Operational Mode	EasyMesh (with TPC function)
Operating Frequency Band	5.25 GHz ~ 5.35 GHz 5.47 GHz ~ 5.725 GHz
Communication Mode	IP based
Channel Puncturing Function	Not Support

Note:

1. The EUT uses following accessories.

Item	Brand	Model	Part Number	Specification
AC Adapter	NETGEAR	2AGA024F	332-11822-01	AC Input: 100-240V,50/60Hz, 0.8A DC Output: 12V, 2.0A DC Output Cable: 3M / 0core

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	RF Chain No.	Antenna Gain (dBi)	Frequency range	Antenna Type	Connector Type
Ant1	0	3.1	2.4~2.4835GHz	Dipole	ipex(MHF)
		3.32	5.15~5.25GHz	Dipole	ipex(MHF)
		2.96	5.25~5.35GHz	Dipole	ipex(MHF)
		3.84	5.47~5.725GHz	Dipole	ipex(MHF)
		3.59	5.725~5.85GHz	Dipole	ipex(MHF)
		3.27	5.850GHz~5.895GHz	Dipole	ipex(MHF)
Ant2	1	3.77	2.4~2.4835GHz	Dipole	ipex(MHF)
		3.18	5.15~5.25GHz	Dipole	ipex(MHF)
		3.84	5.25~5.35GHz	Dipole	ipex(MHF)
		4.39	5.47~5.725GHz	Dipole	ipex(MHF)
		3.81	5.725~5.85GHz	Dipole	ipex(MHF)
		3.81	5.850GHz~5.895GHz	Dipole	ipex(MHF)
Ant3	2	4.11	5.15~5.25GHz	Dipole	ipex(MHF)
		4.09	5.25~5.35GHz	Dipole	ipex(MHF)
		4.23	5.47~5.725GHz	Dipole	ipex(MHF)
		4.23	5.725~5.85GHz	Dipole	ipex(MHF)
		3.21	5.850GHz~5.895GHz	Dipole	ipex(MHF)
Ant4	3	4.23	5.15~5.25GHz	Dipole	ipex(MHF)
		4.04	5.25~5.35GHz	Dipole	ipex(MHF)
		4.26	5.47~5.725GHz	Dipole	ipex(MHF)
		3	5.725~5.85GHz	Dipole	ipex(MHF)
		2.73	5.850GHz~5.895GHz	Dipole	ipex(MHF)

Frequency range	Directional Gain (dBi)
2.4 ~ 2.5GHz	6.39
5.15 ~ 5.25GHz	6.15
5.25 ~ 5.35GHz	6.07
5.47 ~ 5.725GHz	6.33
5.725 ~ 5.85GHz	5.49

* The detailed antenna information, please refer to RBE300Y Directional Gain Measurement data.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ac (VHT160)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX
802.11ax (HE160)	4TX	4RX
802.11be (EHT20)	4TX	4RX
802.11be (EHT40)	4TX	4RX
802.11be (EHT80)	4TX	4RX
802.11be (EHT160)	4TX	4RX
802.11be (EHT240)	4TX	4RX

3.3 EUT Power Level

Highest Power Level						
Signal Mode	Frequency Band (MHz)	Conducted Power		Gain (dBi)	EIRP	
		(mW)	(dBm)		(mW)	(dBm)
CDD	5250-5350	213.114	23.29	4.09	546.527	27.38
	5470-5725	211.891	23.26	4.39	582.254	27.65
Beamforming	5250-5350	213.114	23.29	6.07	862.208	29.36
	5470-5725	211.891	23.26	6.33	910.149	29.59

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 U-NII Detection Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
EMI Test Receiver R&S	ESR7	101451	2025/3/31	2026/3/30
MXG Vector signal generator Keysight	N5182B	MY53052282	2026/1/2	2027/1/1

Notes:

1. The test was performed in Huaya - DFS room.
2. Tested Date: 2026/3/5 ~ 2026/3/15

4.2 Channel Availability Check Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.3 Channel Closing Transmission and Channel Move Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 Non-Occupancy Period

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Statistical Performance Check

Refer to section 4.1 to get the tested date and information of the instruments.

5 Limits of Test Items

5.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 1: Applicability of DFS Requirements Prior To Use a Channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓ note	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Note: Per KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.

Table 2: Applicability of DFS Requirements during Normal Operation.

Requirement	Operational Mode	
	Master or Client with radar detection	Client without radar detection
DFS Detection Threshold	✓	Not required
Channel Closing Transmission Time	✓	✓
Channel Move Time	✓	✓
U-NII Detection Bandwidth	✓	Not required

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

5.2 Test Limits and Radar Signal Parameters

Detection Threshold Values

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Parameters of DFS Test Waveforms

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a ----- Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 6: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30
Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency. a) the Channel center frequency b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth It include 10 trails for every subset, the formula as below, For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel. For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by: $FL + (0.4 * \text{Chirp Width [in MHz]})$ For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by: $FH - (0.4 * \text{Chirp Width [in MHz]})$							

Table 7: Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

6 Test Arrangements

6.1 Test Setup

Conducted measurement

EasyMesh Mode

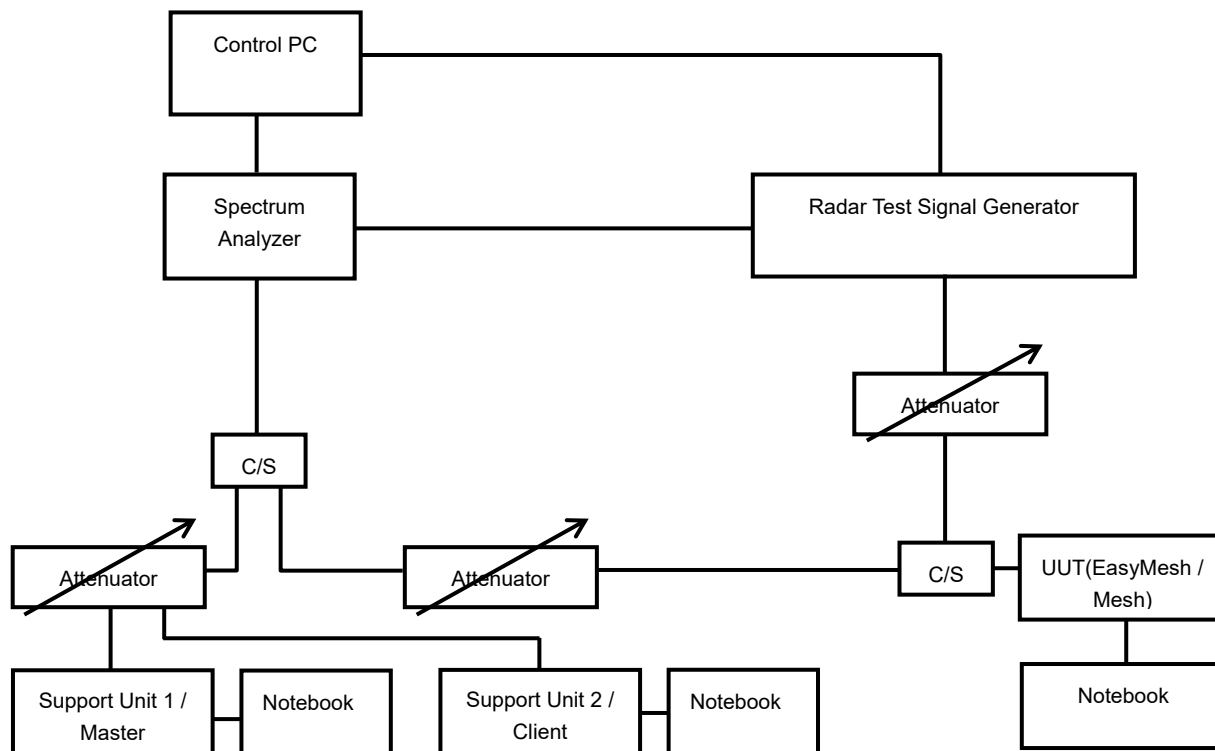


The UUT is a U-NII Device operating in EasyMesh mode. The radar test signals are injected into the EasyMesh Device.

6.2 Test Procedure

6.2.1 DFS Measurement System

A complete DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating system and (2) the Traffic Monitoring system. The control PC is necessary for generating the Radar waveforms in Table 5, 6 and 7. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

Conducted Setup Configuration of DFS Measurement System

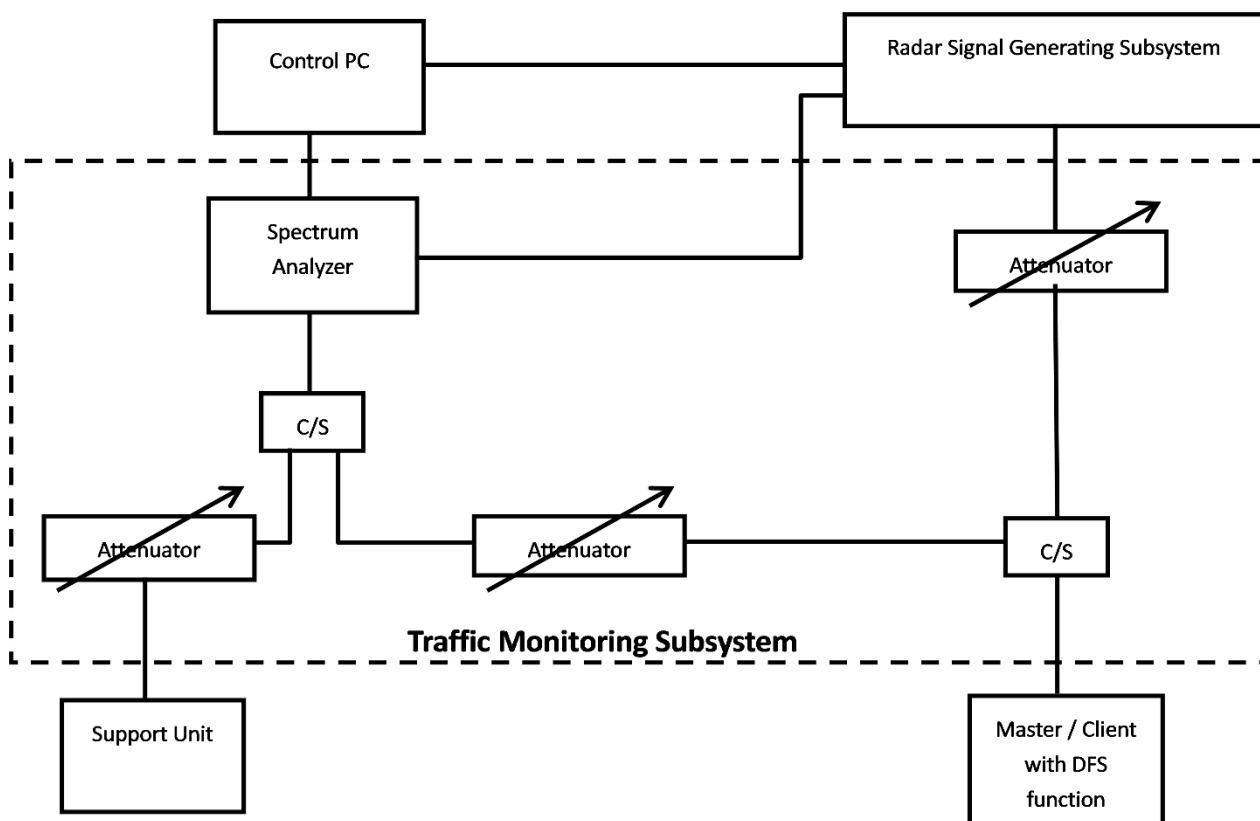


Channel Loading

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

Applicable	Requirements apply
	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
√	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.


Plots of Channel Loading

Duty Cycle

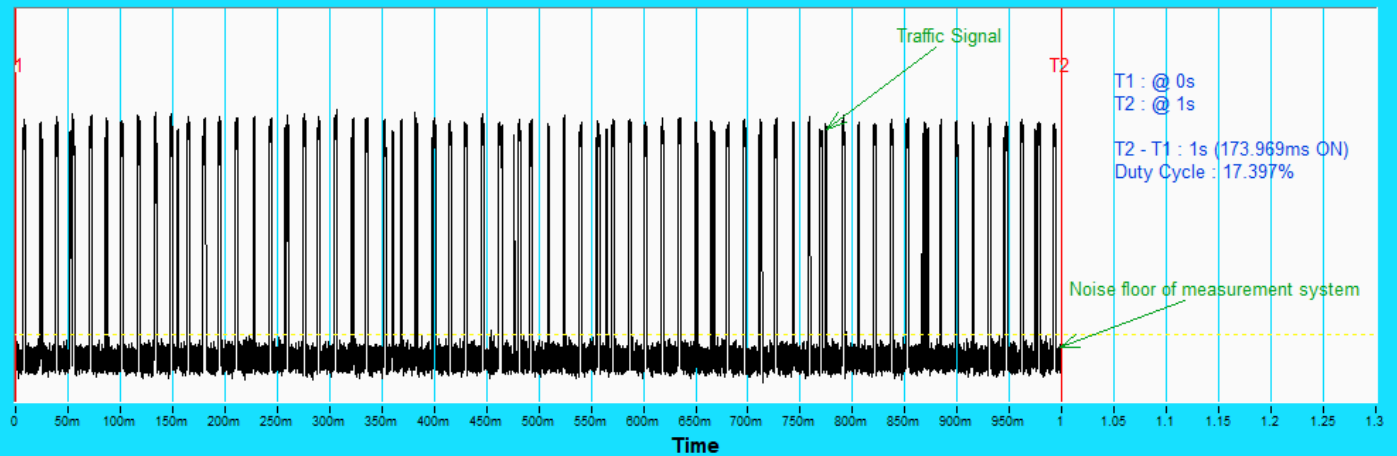


802.11be (EHT20)

Duty Cycle

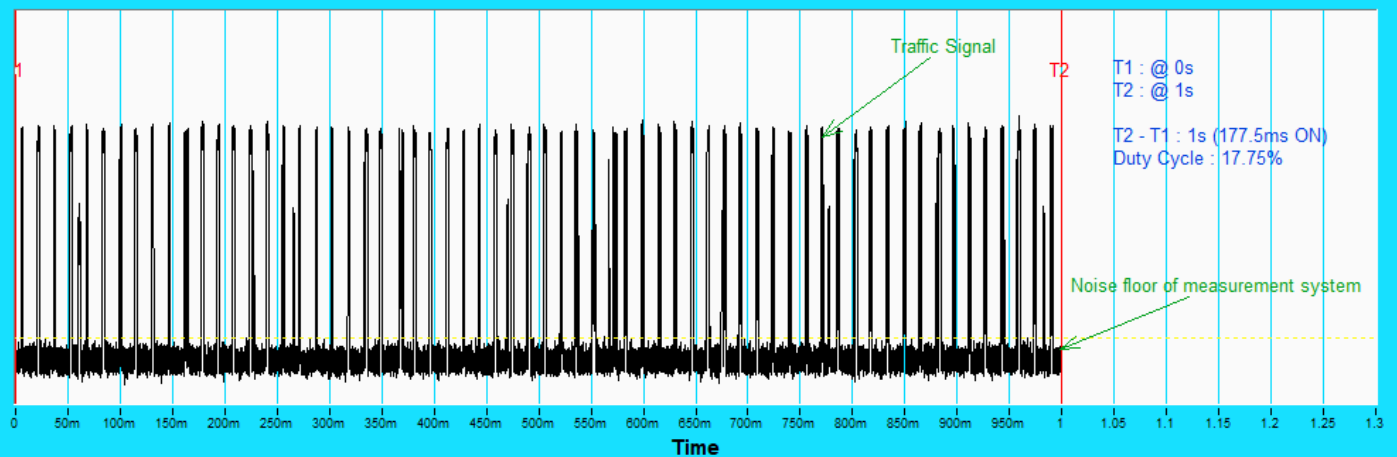

802.11be (EHT40)


Duty Cycle

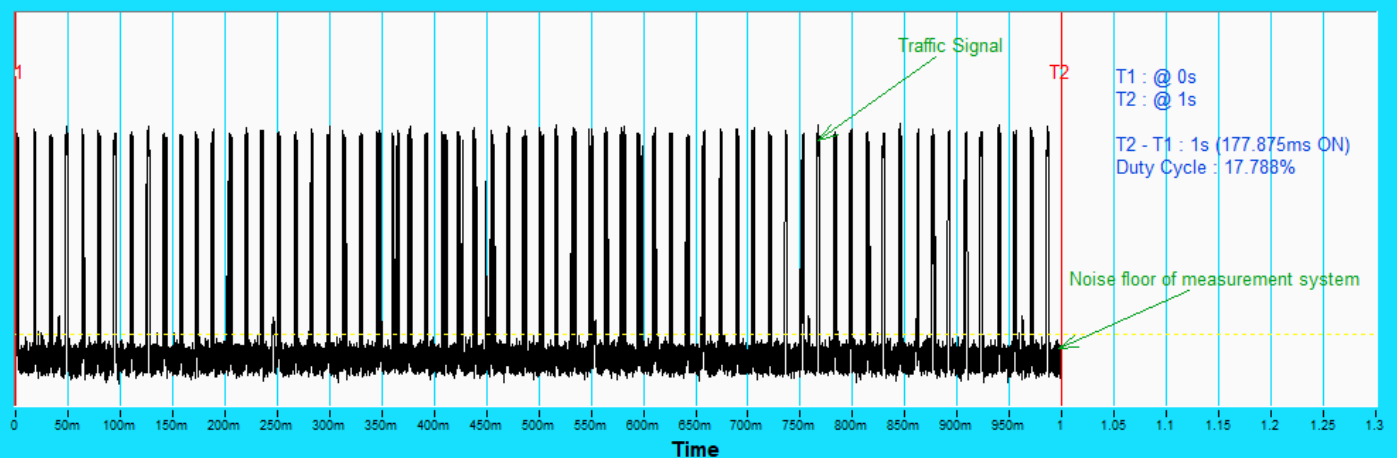

802.11be (EHT80)


Plots of Channel Loading

Duty Cycle

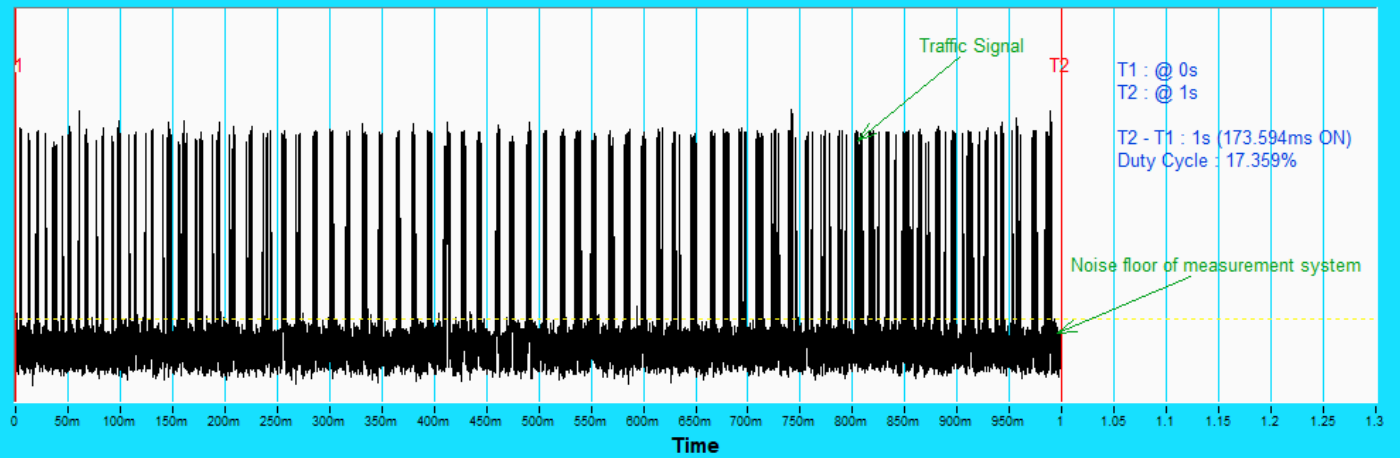

802.11be (EHT160)

Duty Cycle

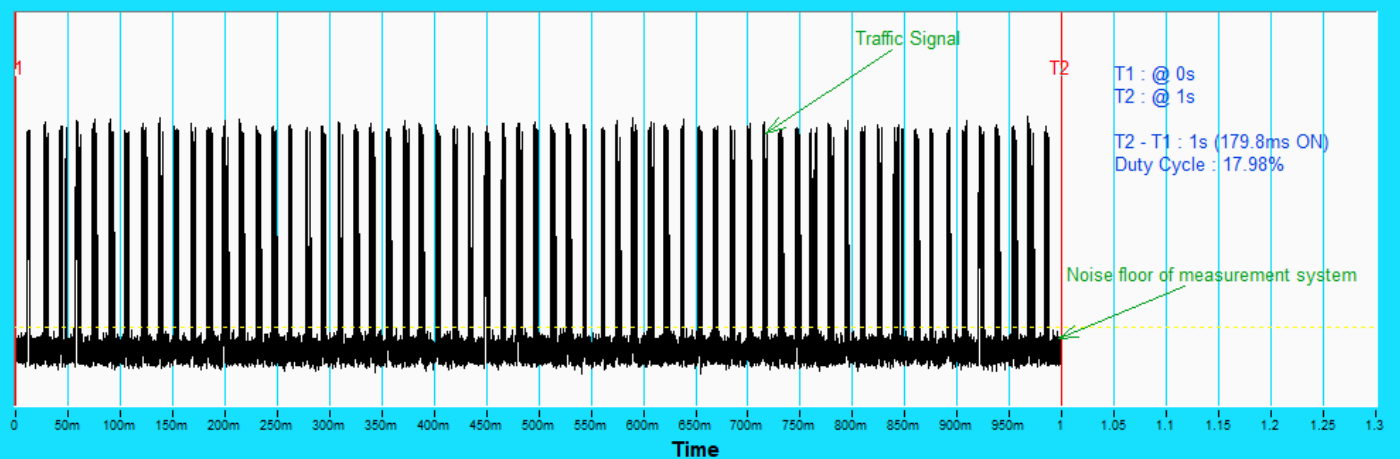


802.11be (EHT240)

6.2.2 Calibration of DFS Detection Threshold Level

The measured channel is chosen from the operating channels of the UUT within the DFS band and using the all bandwidth mode available for the link. The radar signal was the same as transmitted channels, and injected into the antenna of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

Conducted Setup Configuration of Calibration of DFS Detection Threshold Level

The calibrated conducted detection threshold level is set to -64 dBm. The tested level is lower than required level hence it provides margin to the limit.

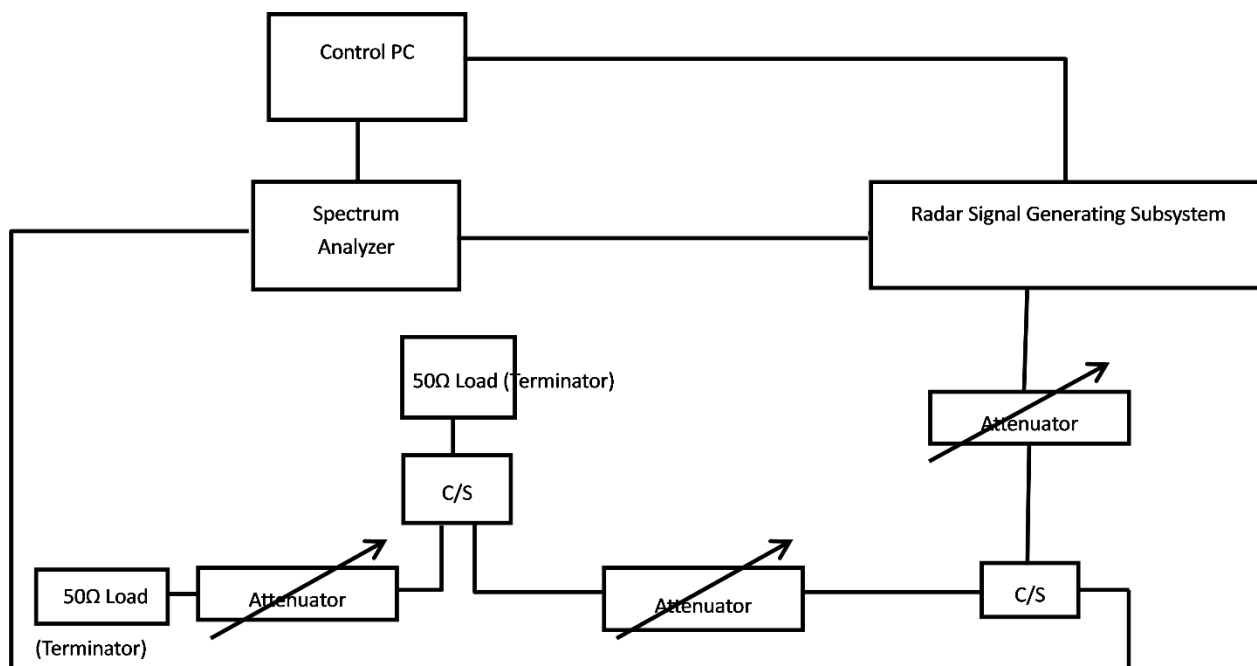

6.2.3 DFS Detection Threshold


Test Mode: Device Operating in EasyMesh Mode


The radar test waveforms are injected into the EasyMesh.

The antenna net gain is 2.95 dBi.


DFS Detection Threshold = -64 dBm + 2.95 dBi = -61.05 dBm

The calibrated conducted detection threshold level is lower than -61.05 dBm.

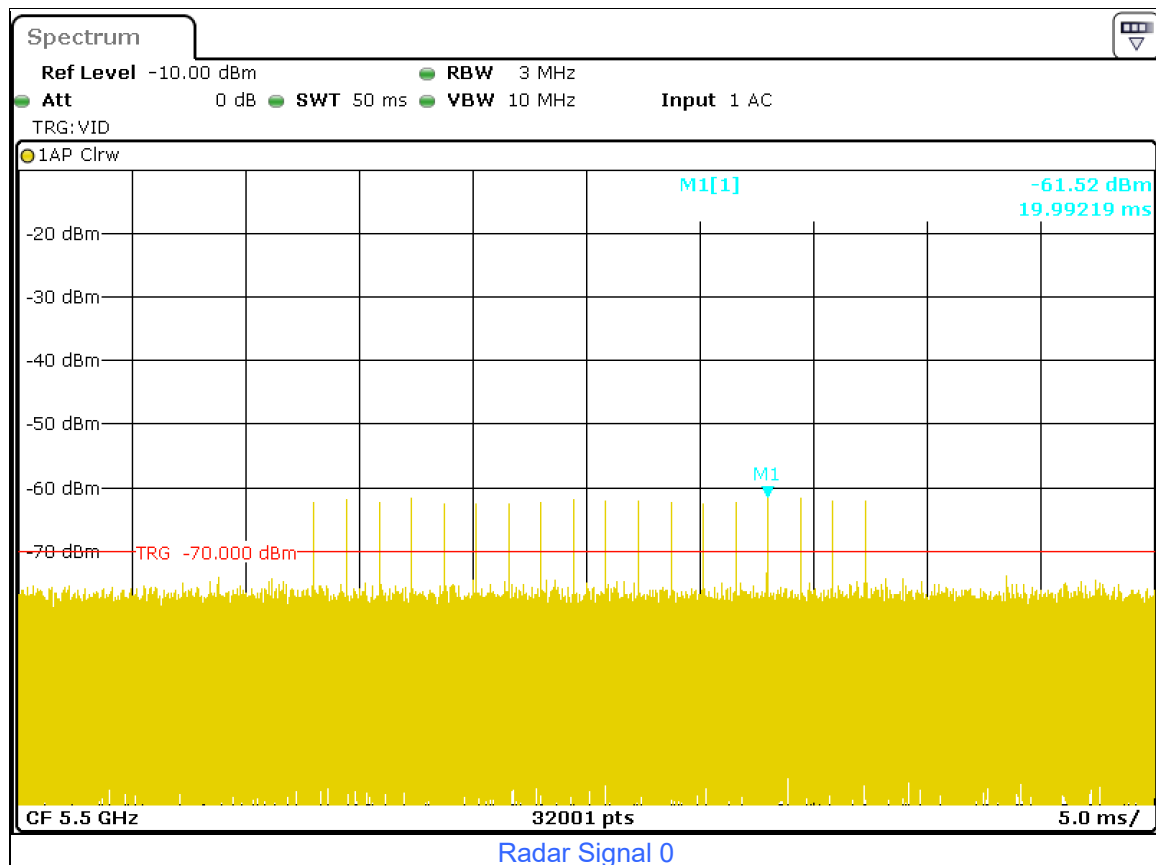


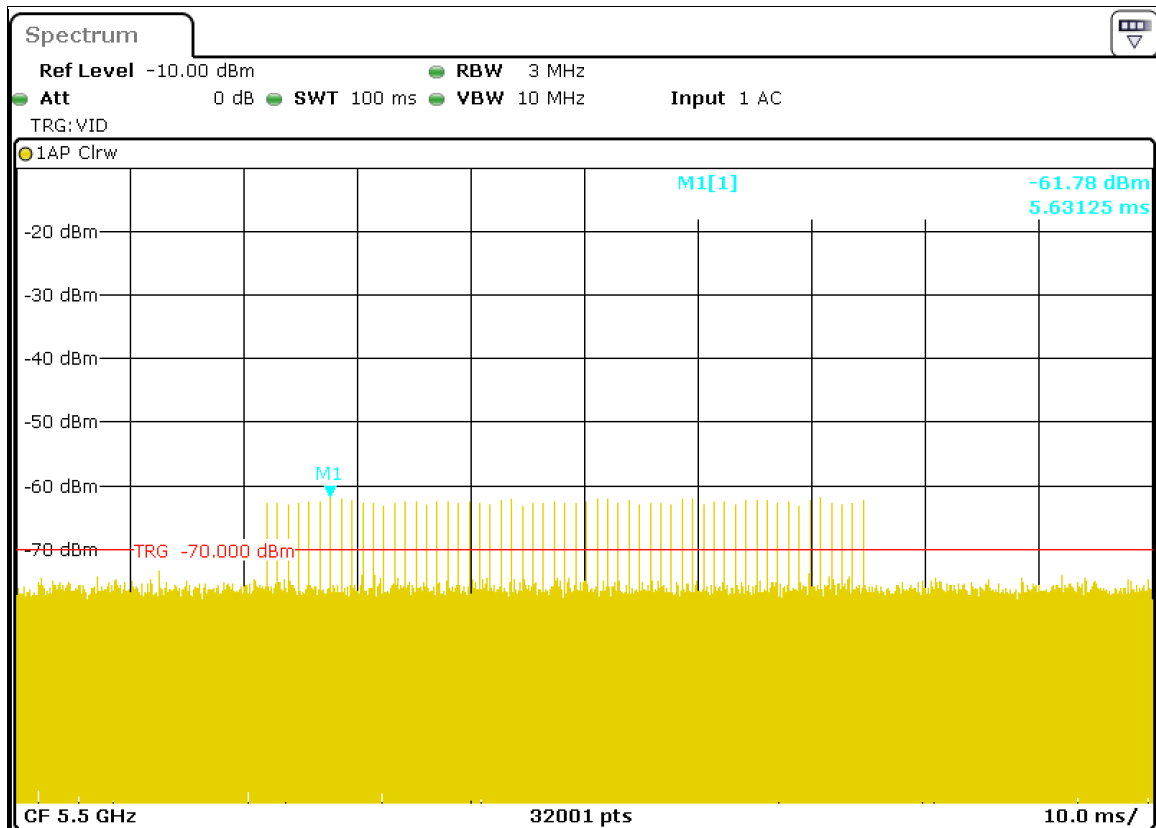


Radar Signal 1 (Test A)

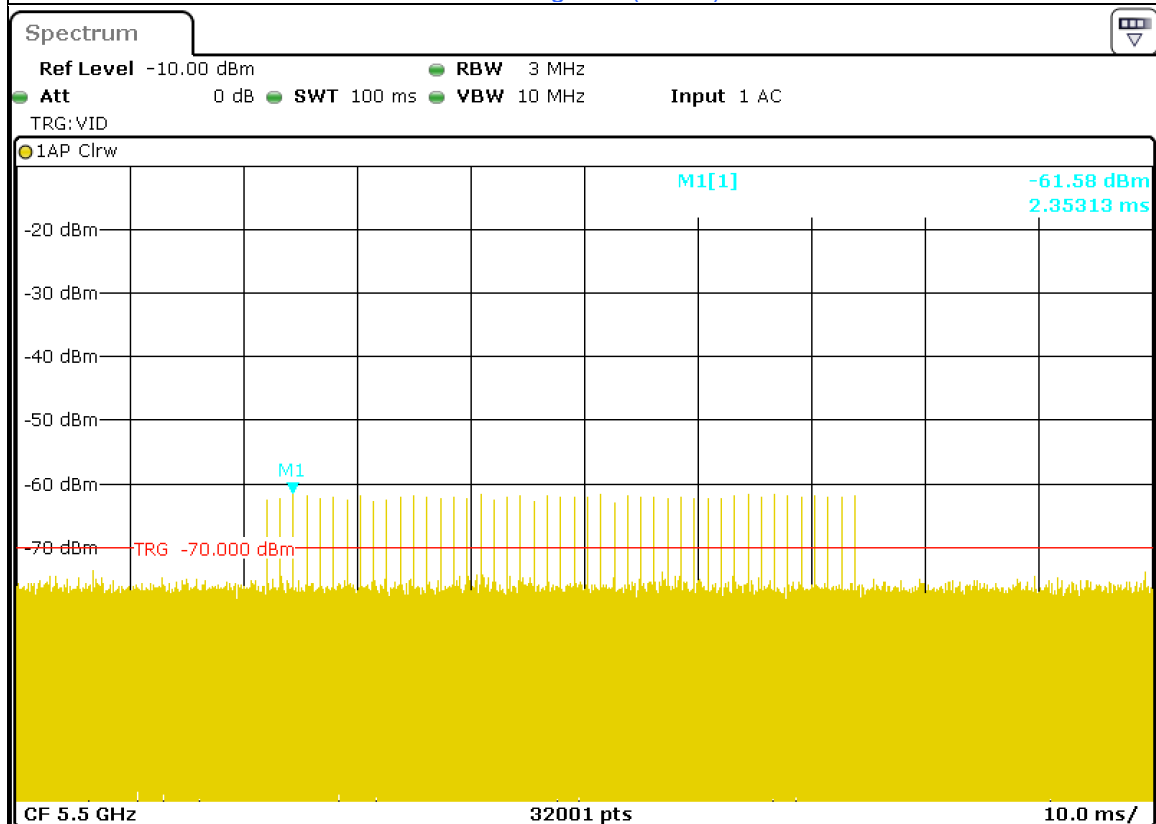


Radar Signal 1 (Test B)

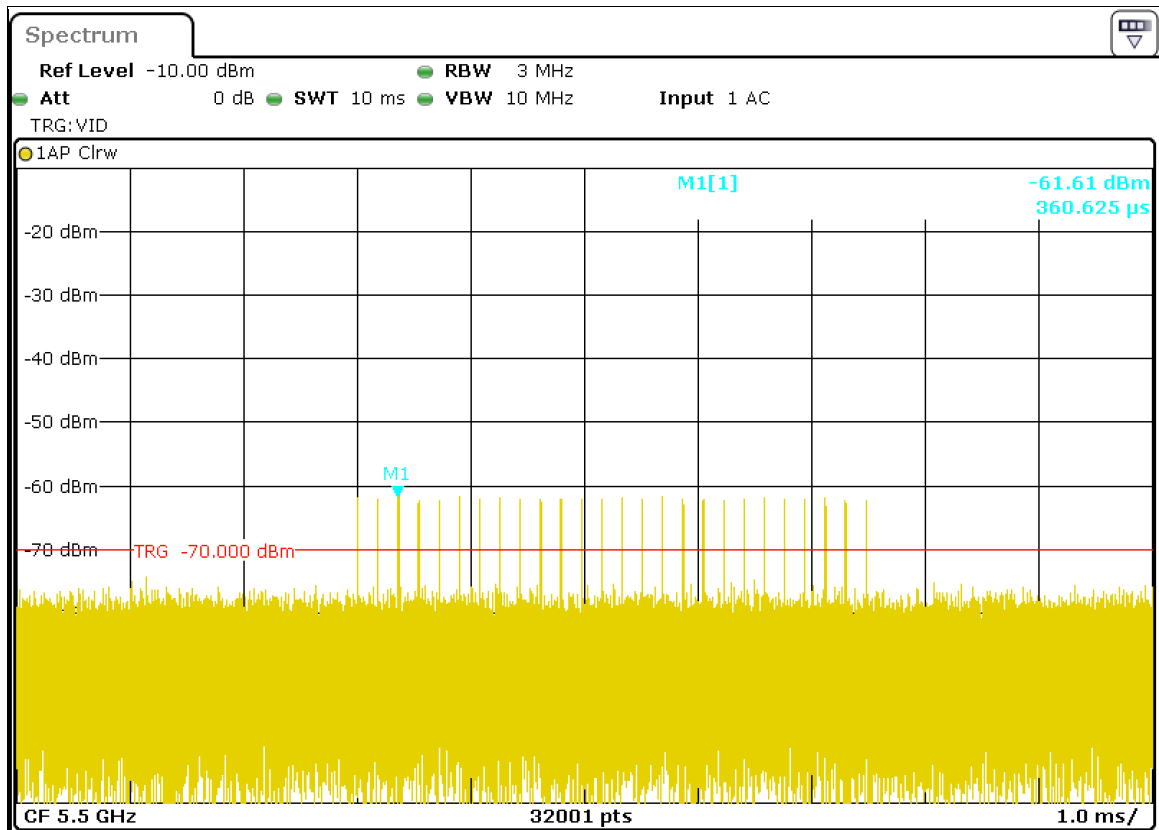


Radar Signal 2

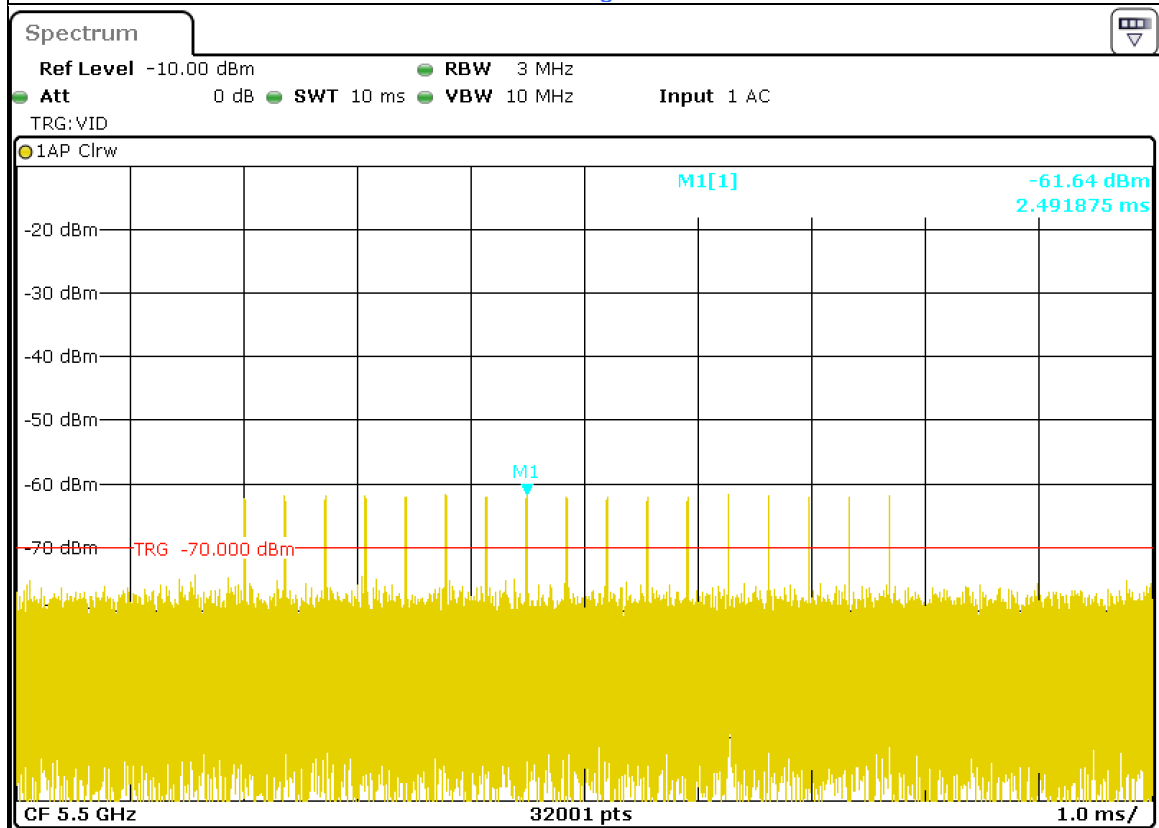


Radar Signal 3

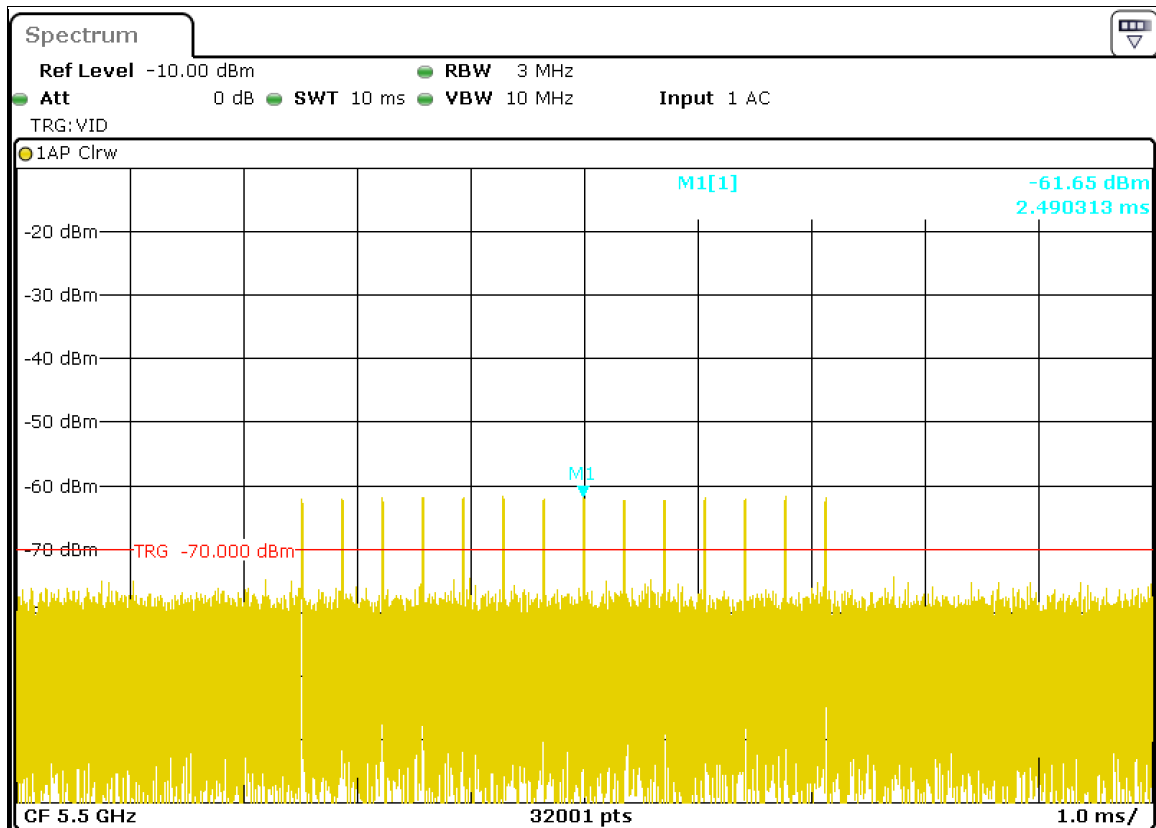


Radar Signal 4

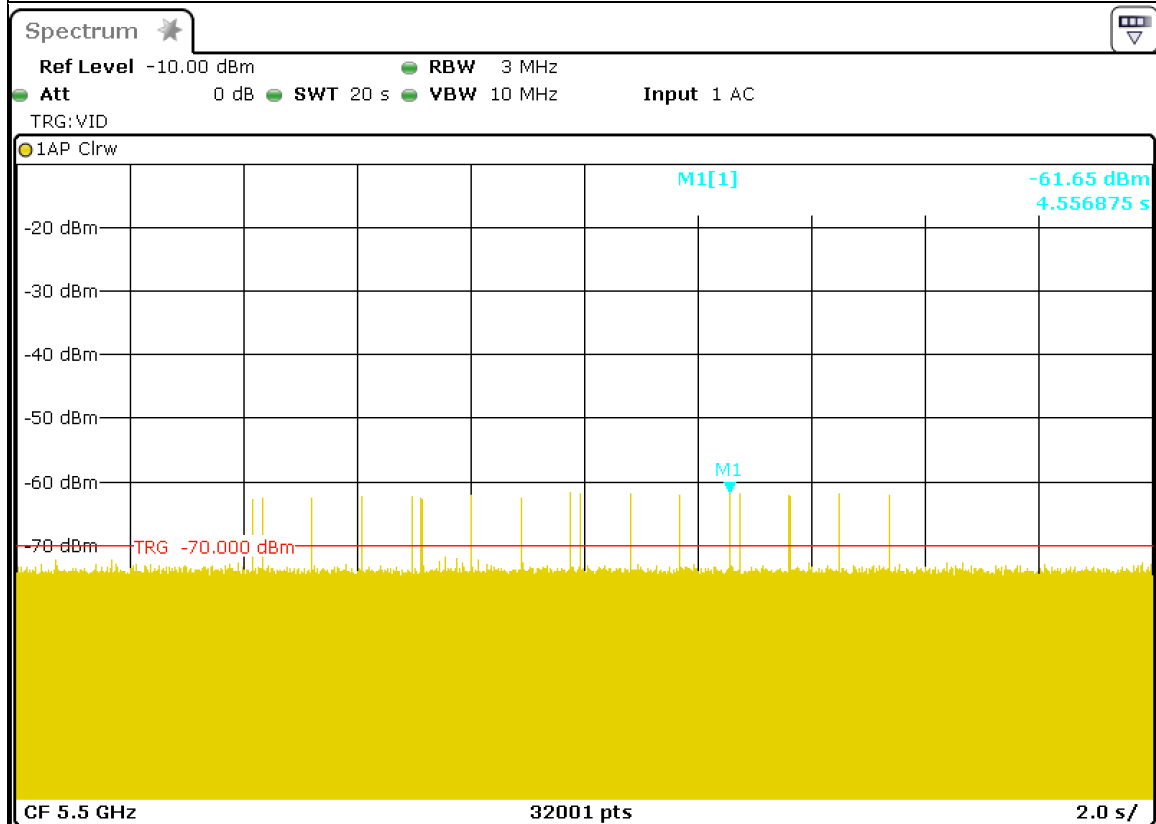

Radar Signal 5

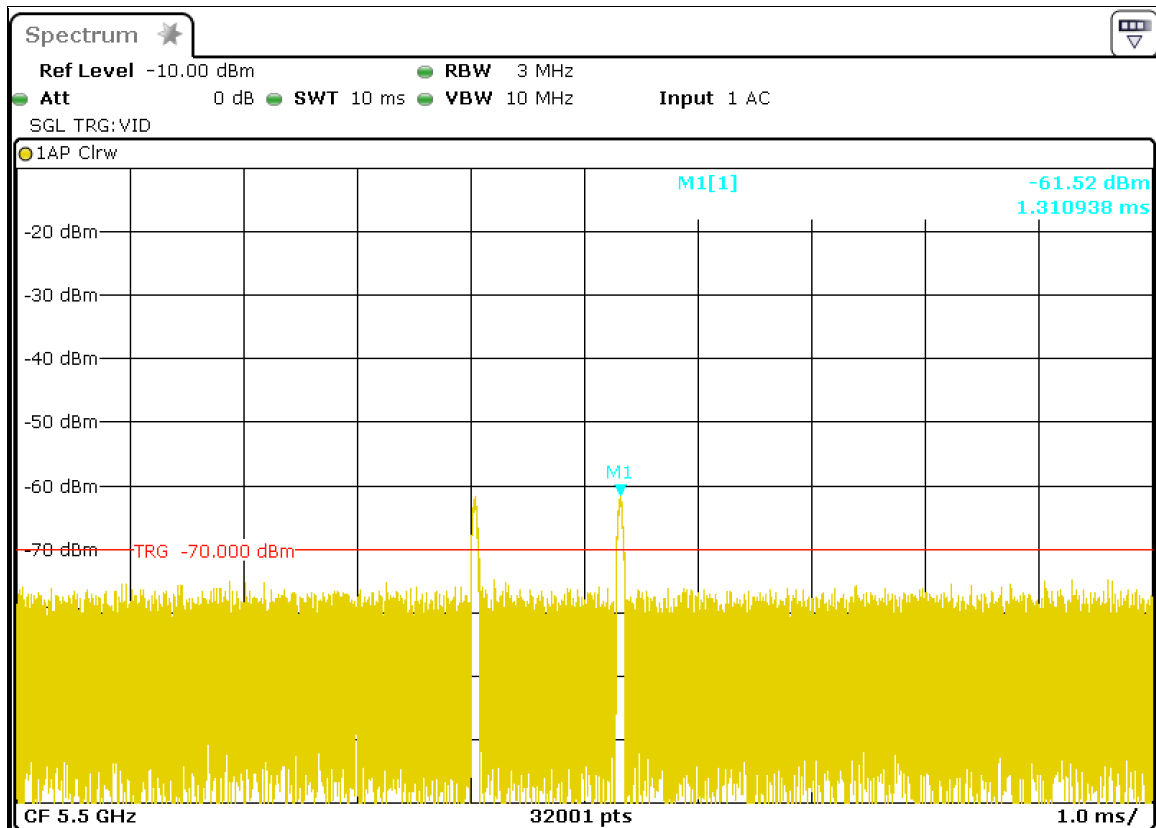

Radar Signal 5 (Single Burst)

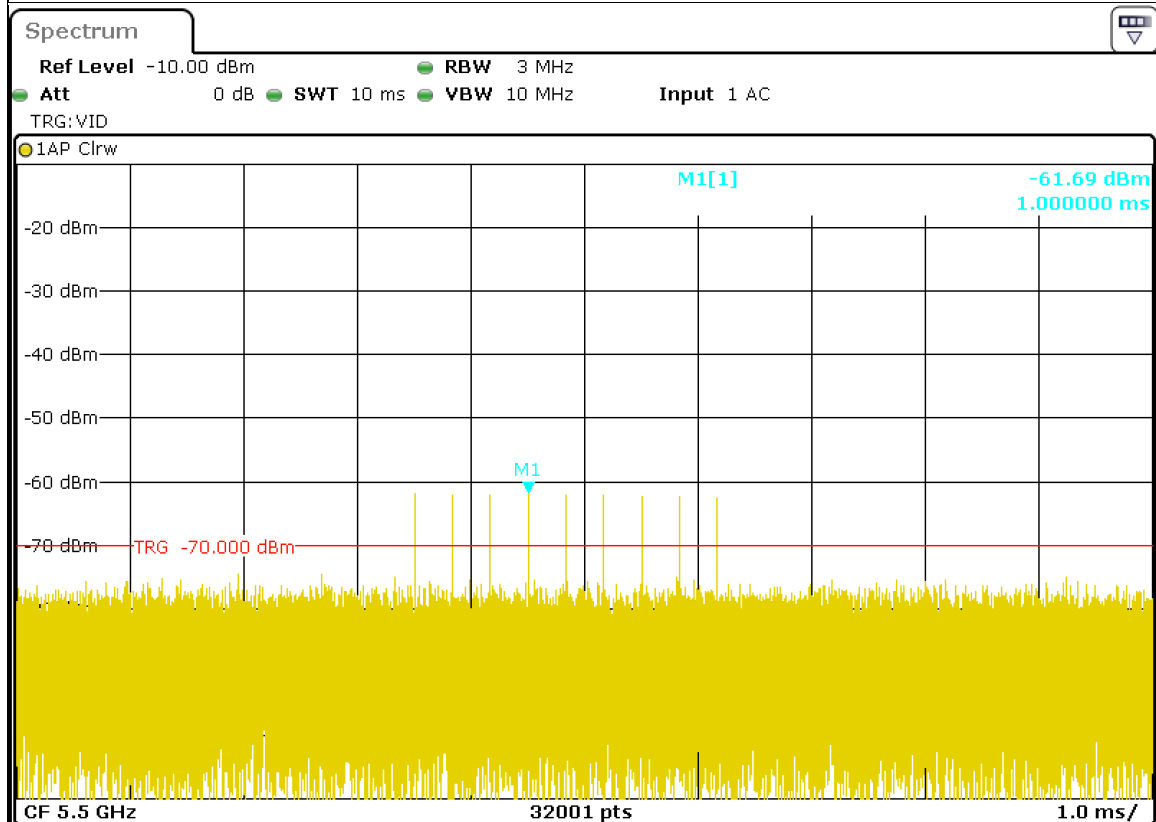

Radar Signal 6

6.2.4 DFS Companion Device

Companion Device Information					
Product (Item 1)	Brand	Model No.	FCC ID	Specification	Software/Firmware Version
Orbi 11BE WiFi 7 Tri-band Router	NETGEAR	RBE871	PY324100619	5G Ant Minimum gain : 3.59 dBi Maximum EIRP : 29.97dBm	OpenWrt 23.05-SNAPSHOT r0+24337-c4333f995b / LuCI openwrt-23.05 branch git-24.034.54904-39d1aee Kernel Version: 5.4.213

Note: This device was functioned as a Master device during the DFS test.

Product	Brand	Model No.	FCC ID	Specification	Software/Firmware Version
Orbi 11BE WiFi 7 Tri-band Satellite	NETGEAR	RBE870	PY324100619	5G Ant Minimum gain : 3.59 dBi Maximum EIRP : 29.97dBm	V12.1.8.1

Note: This device was functioned as a Slave device during the DFS test.


7 Test Results of Test Item

7.1 U-NII Detection Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------


For 802.11be (EHT20)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5500 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 19.08 MHz Detection bandwidth (5510 MHz (FH) – 5490 MHz (FL)): 20 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Percentage of Successful Detection	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

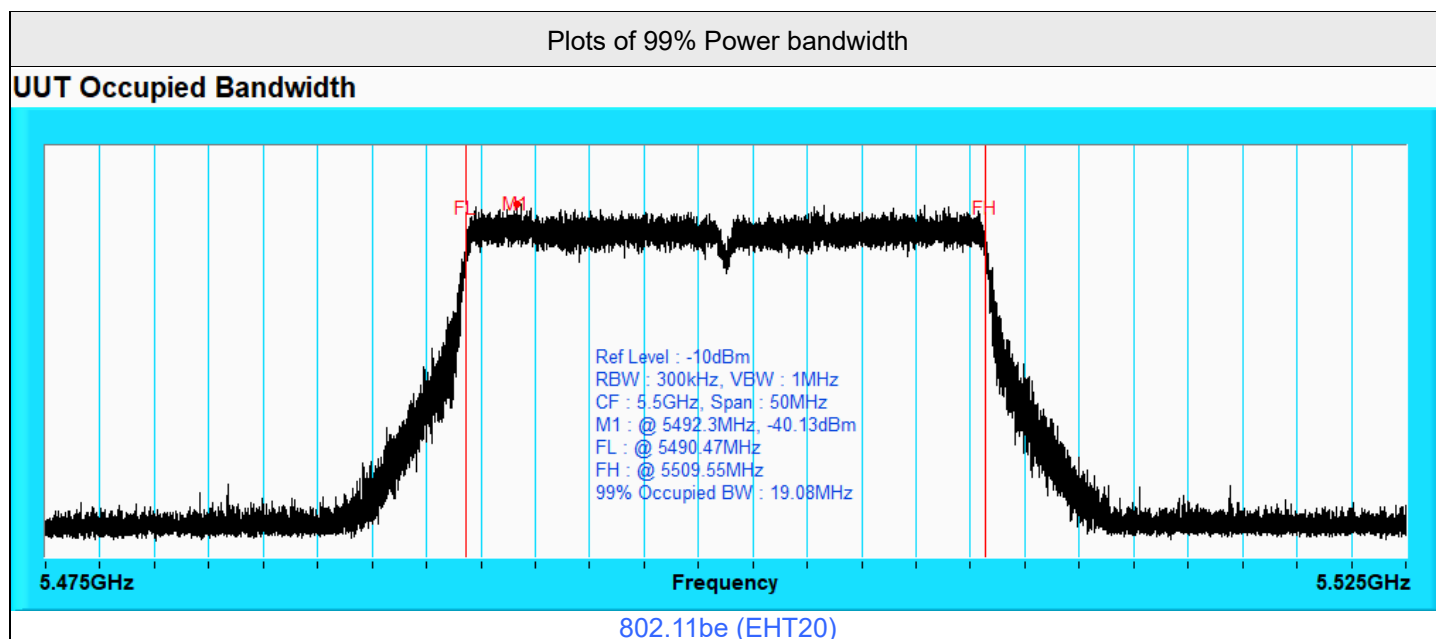

802.11be (EHT40)

Detection Bandwidth Test													
Radar Type 0													
EUT Frequency: 5510 MHz													
Detection bandwidth limit (100% of EUT 99% Power bandwidth): 38.24 MHz													
Detection bandwidth (5530 MHz (FH) – 5490 MHz (FL)): 40 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

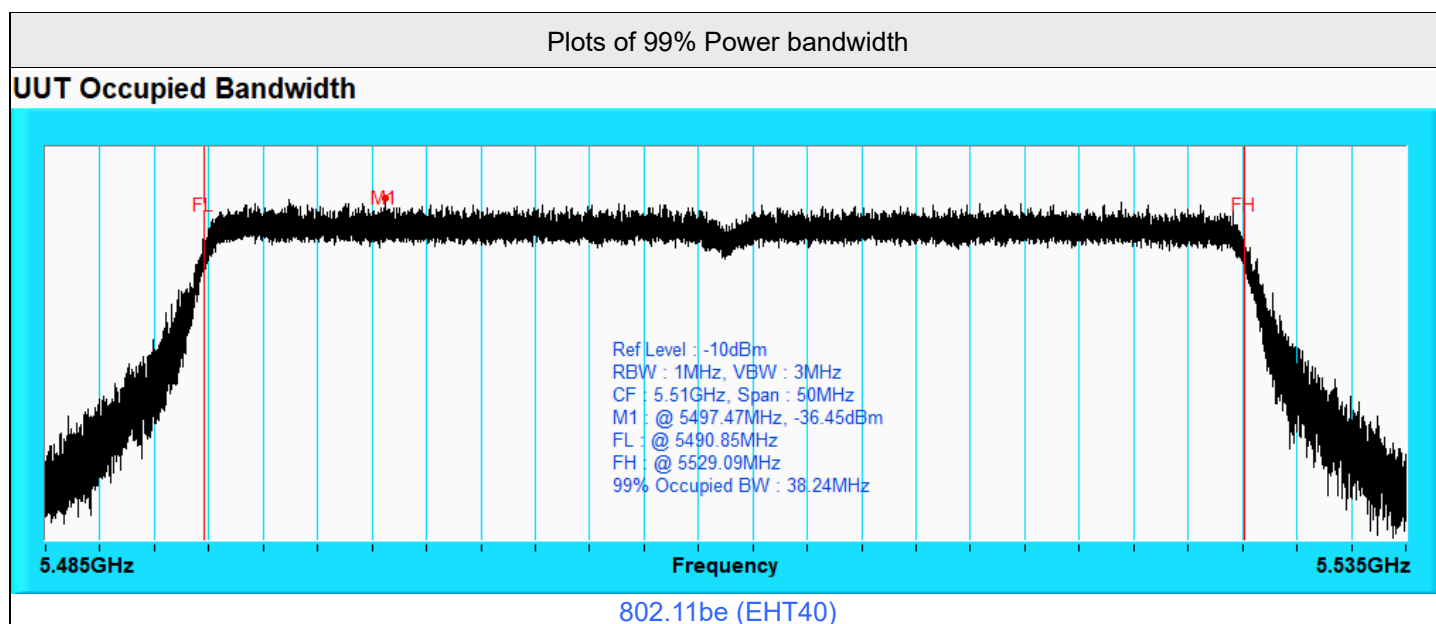

802.11be (EHT80)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5530 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 77.78 MHz

Detection bandwidth (5570 MHz (FH) – 5490 MHz (FL)): 80 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

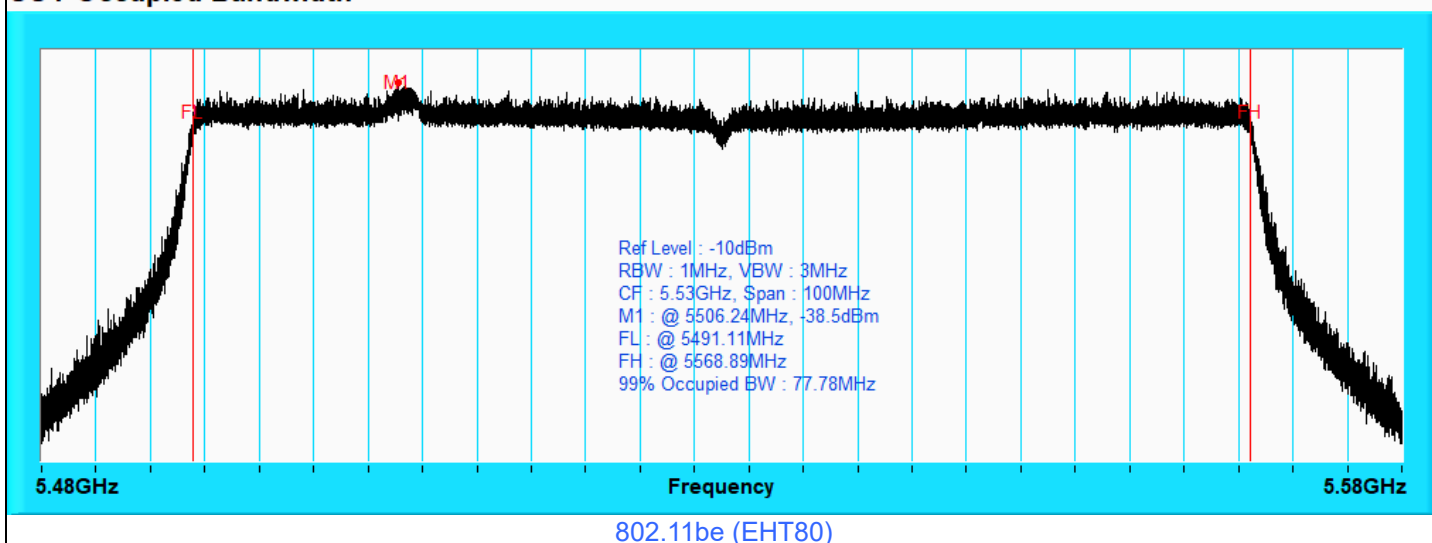

802.11be (EHT160) CH50

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5250 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 156.81 MHz


Detection bandwidth (5330 MHz (FH) – 5250 MHz (FL)): 80 MHz

(160 MHz channel (5250 MHz) straddle between 5150 ~ 5250 MHz and 5250 ~ 5350 MHz, the DFS ability is necessary in 5250 ~ 5350 MHz, therefore DFS detection bandwidth start from 5250 MHz for 802.11be (EHT160) mode.)

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5250 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5255	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5260	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5265	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5270	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5275	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5280	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5285	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5290	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5295	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5300	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5305	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5310	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5315	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5320	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5325	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5330 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

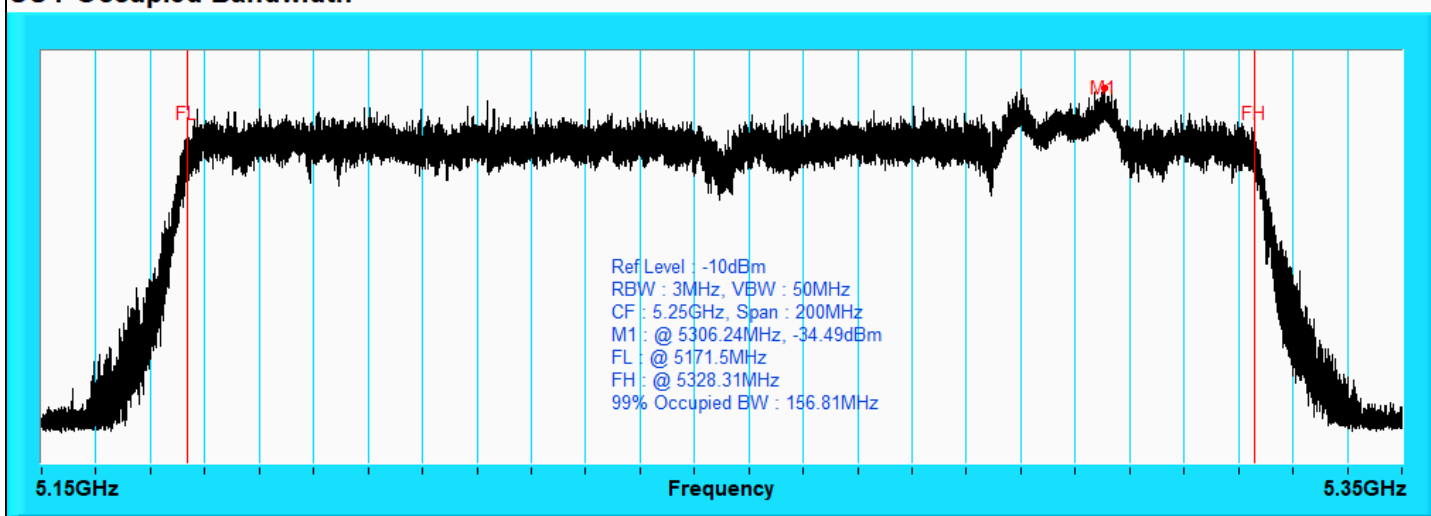

802.11be (EHT160) CH50

802.11be (EHT160) CH114

Detection Bandwidth Test

Radar Type 0


EUT Frequency: 5570 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 156.72 MHz

Detection bandwidth (5650 MHz (FH) – 5490 MHz (FL)): 160 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5650 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

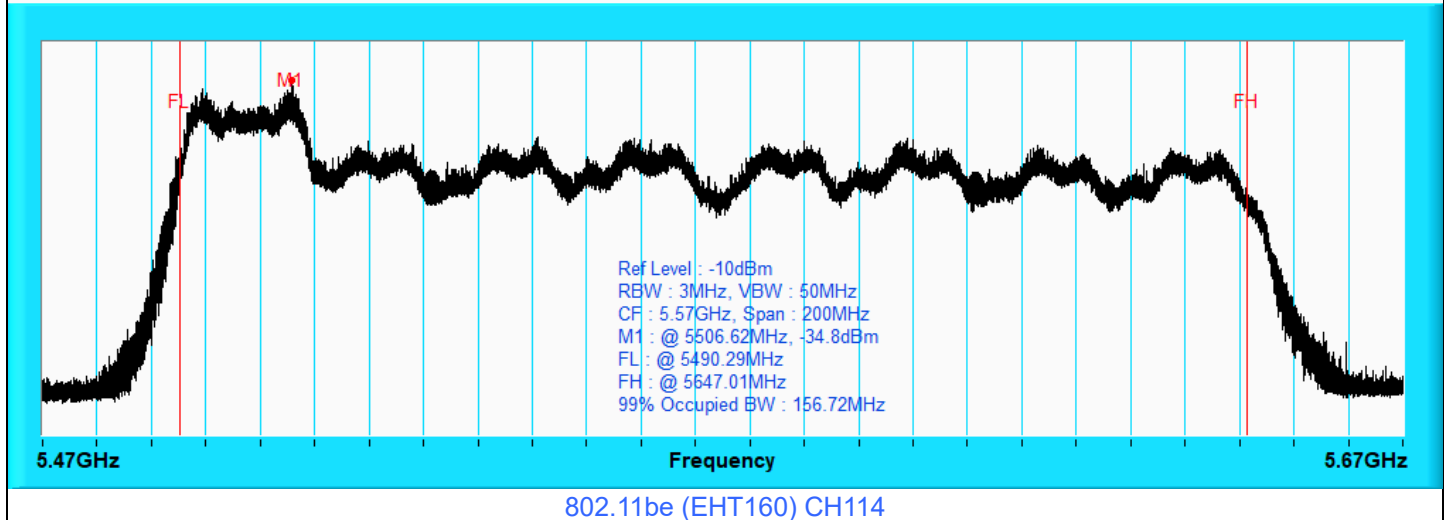UUT Occupied Bandwidth


802.11be (EHT240)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5610 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 234.3 MHz Detection bandwidth (5725 MHz (FH) – 5490 MHz (FL)): 235 MHz (240 MHz channel (5610 MHz) straddle between 5470 ~ 5725 MHz and 5725 ~ 5850 MHz, the DFS ability is necessary in 5470 ~ 5725 MHz, therefore DFS detection bandwidth end of 5725 MHz for 802.11be (EHT240) mode.)													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5650	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5655	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

5660	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5665	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5670	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5675	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5680	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5685	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5690	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5695	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5700	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5705	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5710	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5715	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5720	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5725 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

UUT Occupied Bandwidth

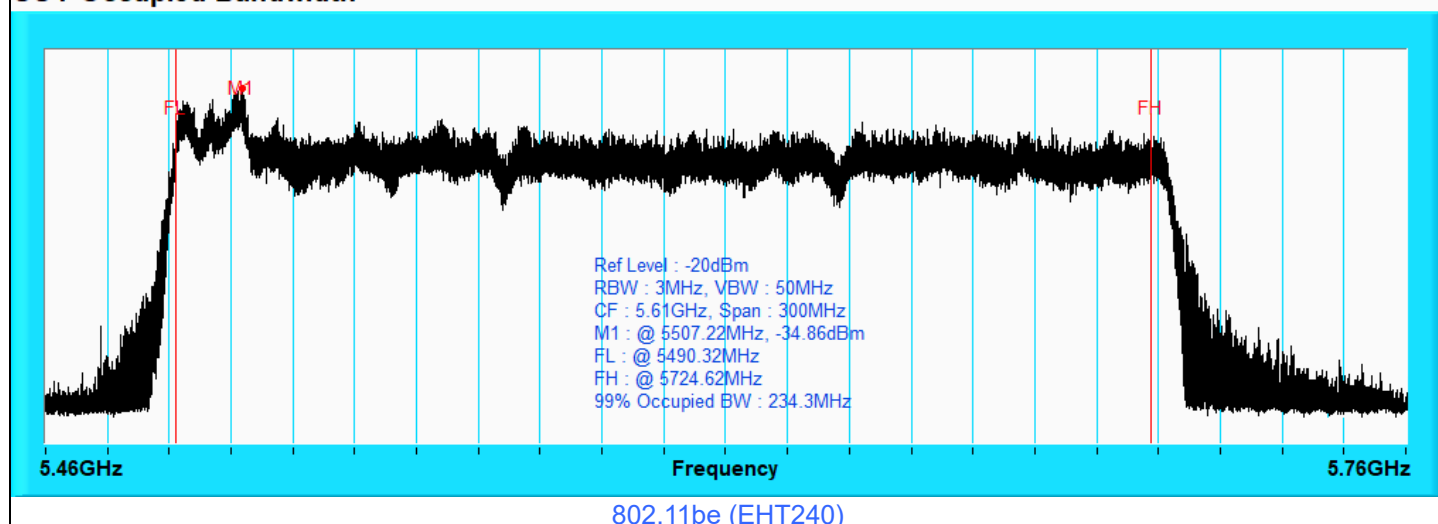


7.2 Channel Availability Check Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------


If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.

Timing of Radar Signal	Observation	
	EUT	Spectrum Analyzer
Within 0 to 6 seconds	Detected	No transmissions
Within 54 to 60 seconds	Detected	No transmissions

Note: Worst case channel for final "Channel Availability Check" test.

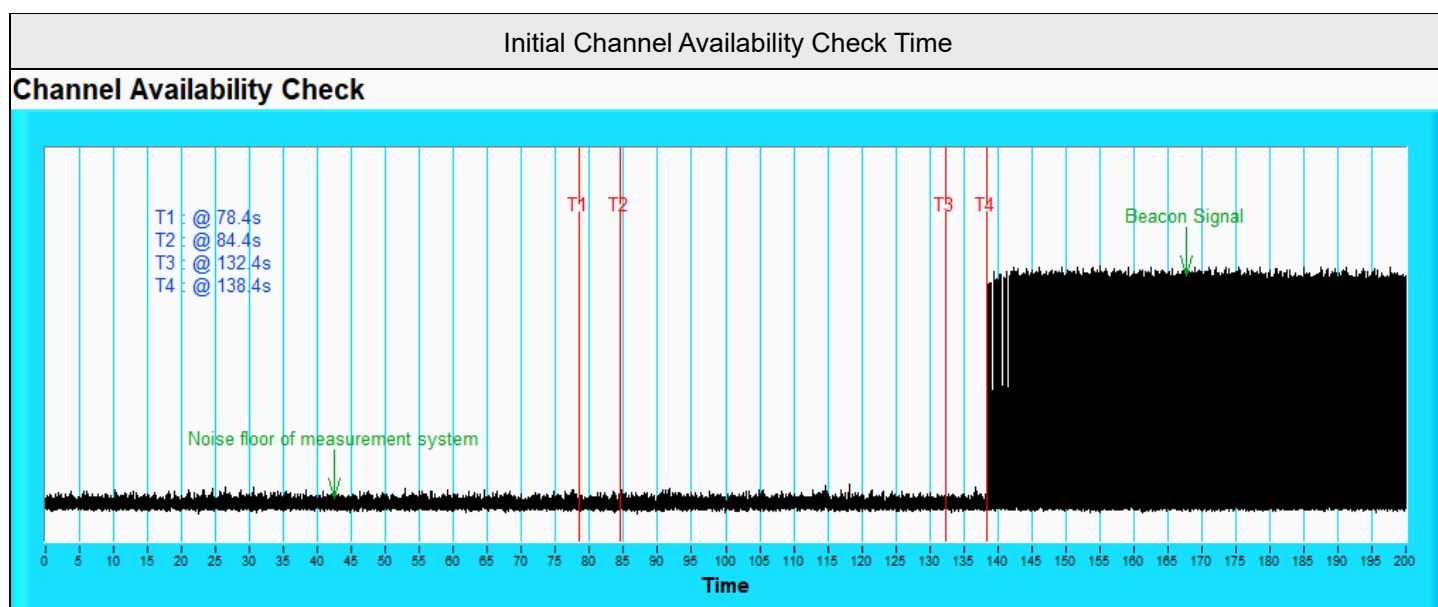


Note: T1 denotes the end of power-up time period is 78.4th second. T4 denotes the end of Channel Availability Check time is 138.4th second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

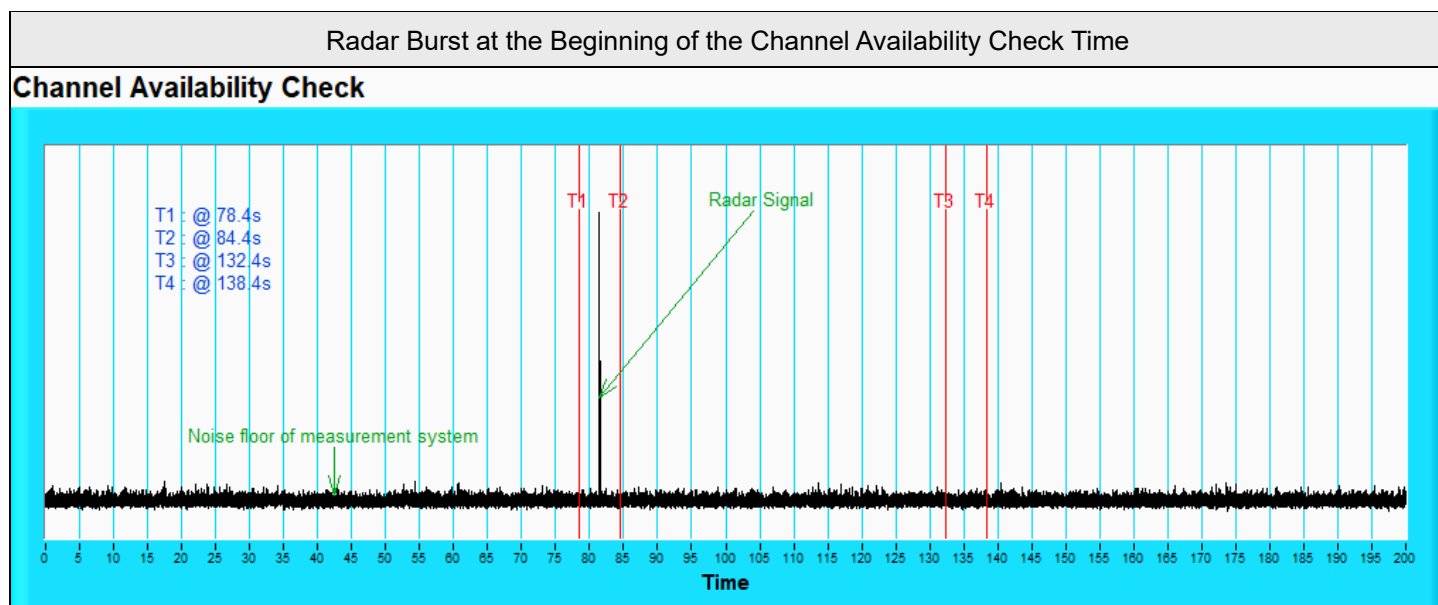

Note: T1 denotes the end of power-up time period is 78.4th second. T2 denotes 84.4th second and the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 138.4th second.

Radar Burst at the End of the Channel Availability Check Time

Channel Availability Check

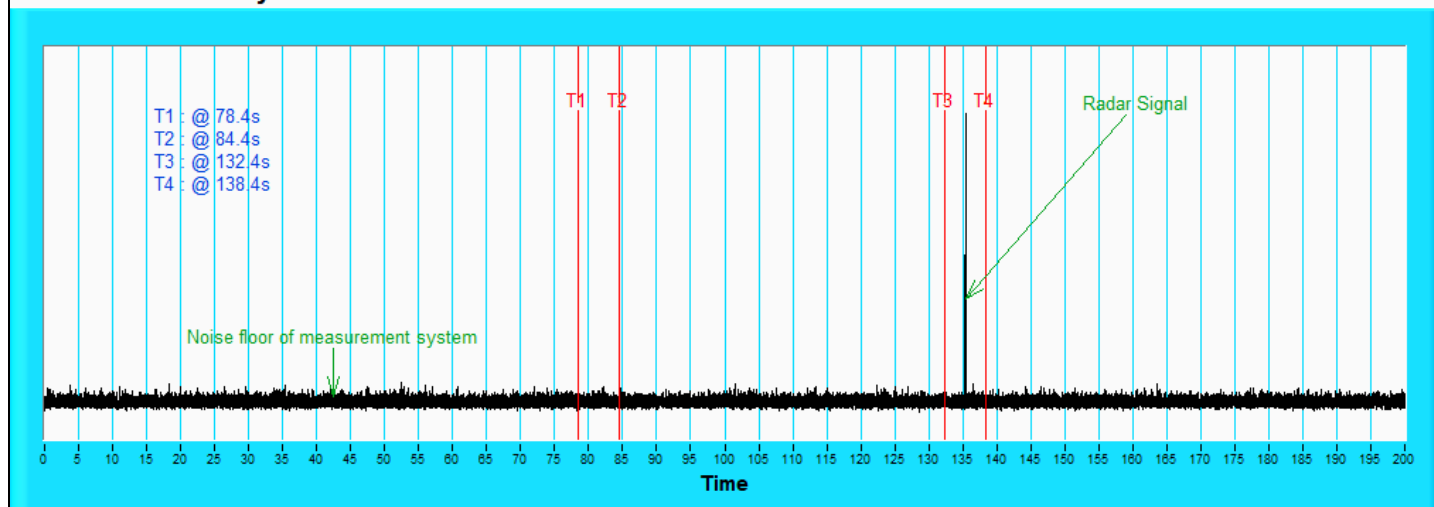


Note: T1 denotes the end of power-up time period is 78.4th second. T3 denotes 132.4th second and the radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence. T4 denotes the 138.4th second.

7.3 Channel Closing Transmission and Channel Move Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------


Radar signal 0

Channel Closing Transmission Time & Channel Move Time

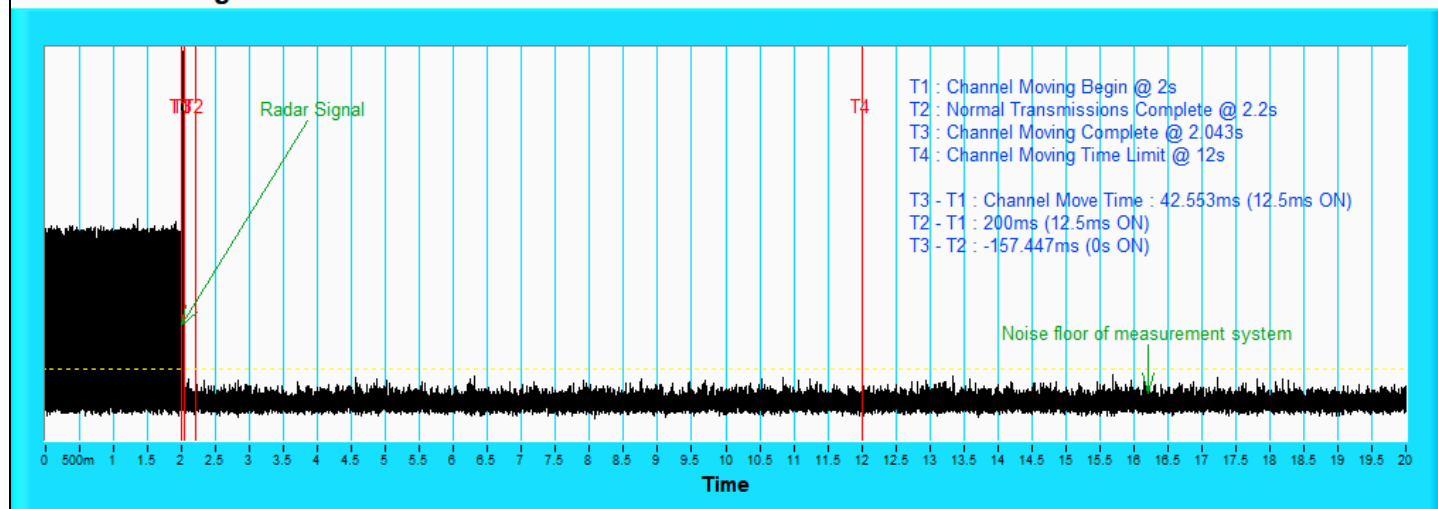

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

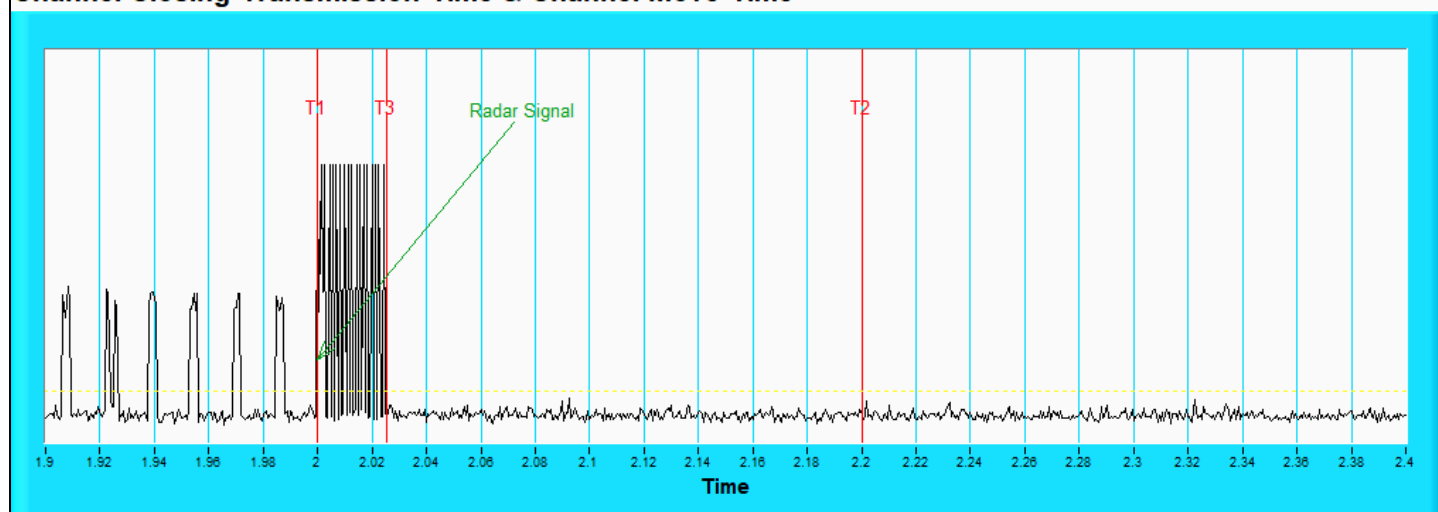

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 1

Channel Closing Transmission Time & Channel Move Time

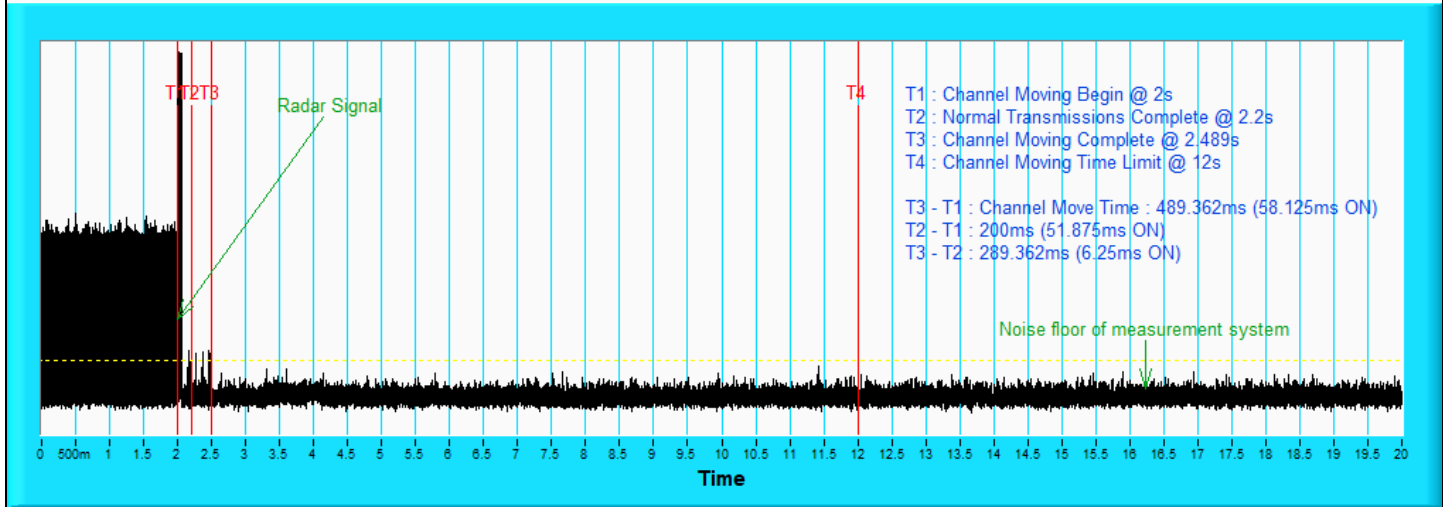

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

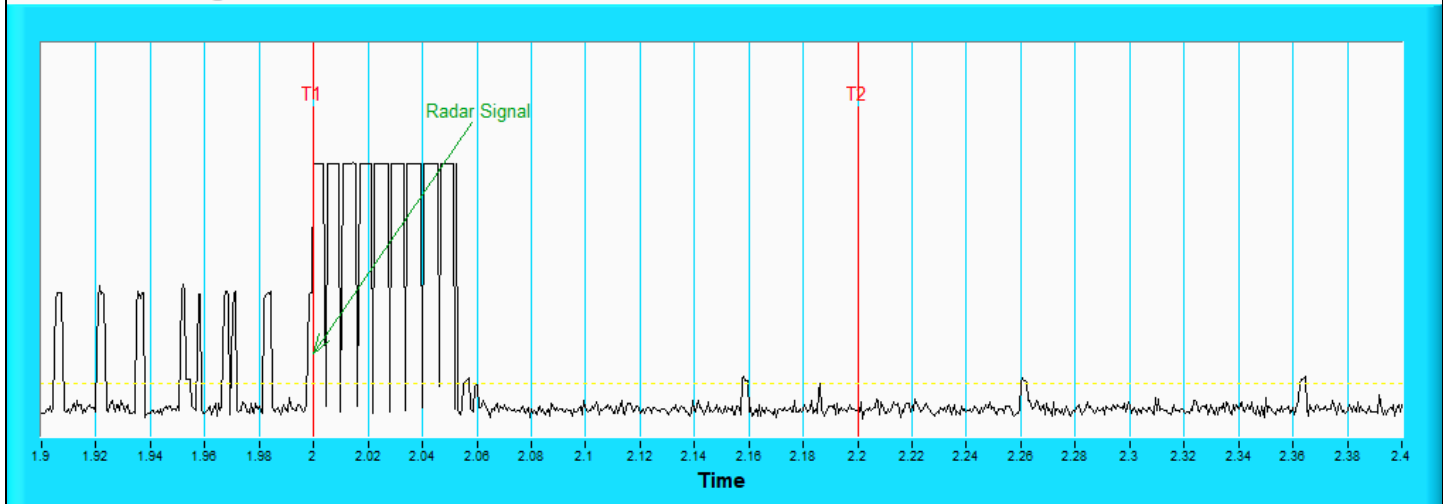

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 2

Channel Closing Transmission Time & Channel Move Time

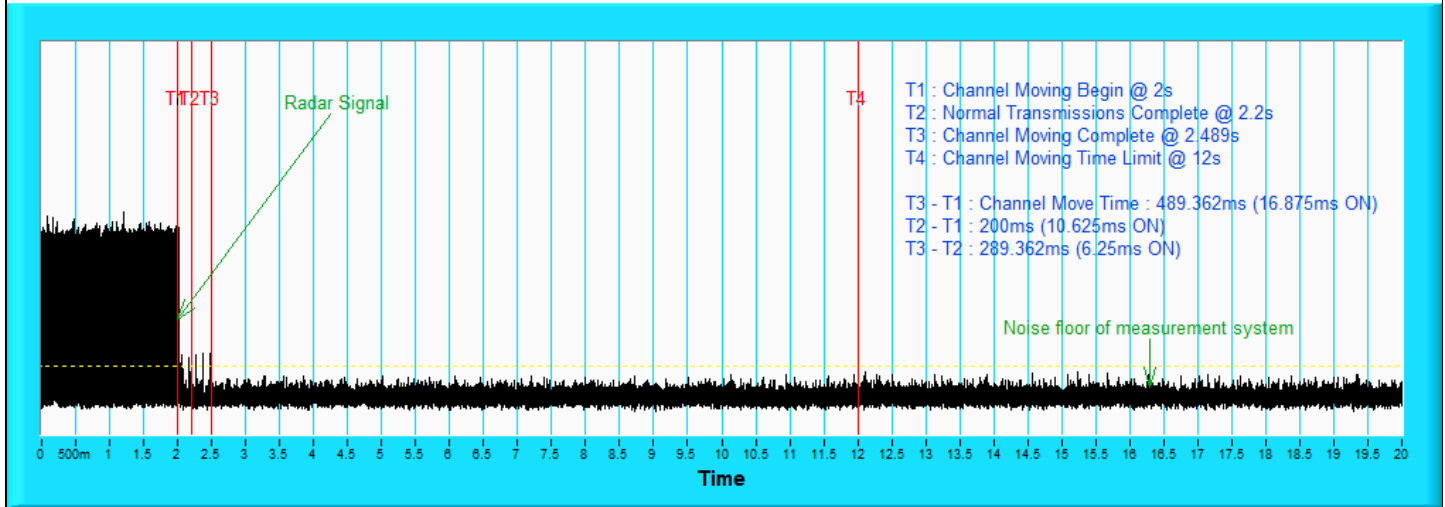

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

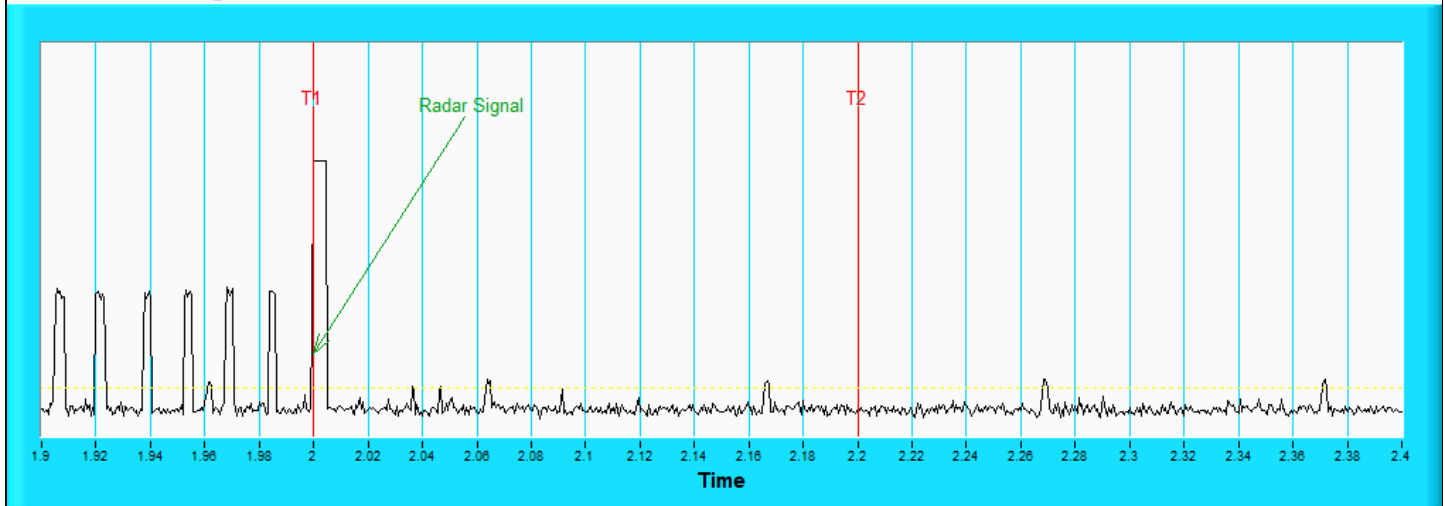

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 3

Channel Closing Transmission Time & Channel Move Time

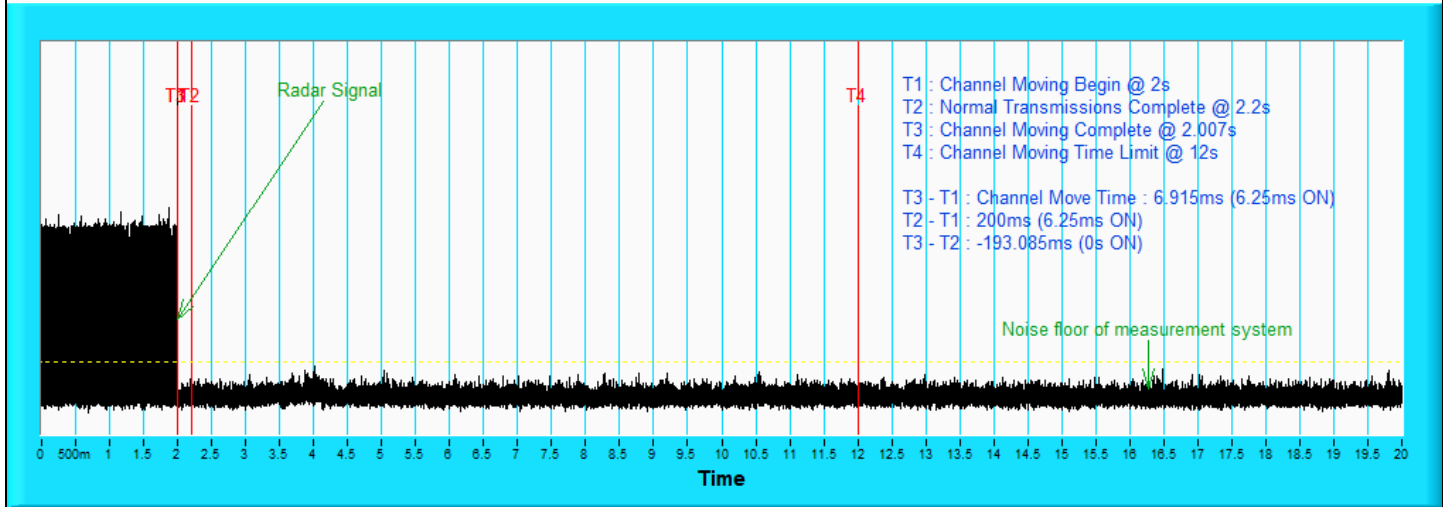

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

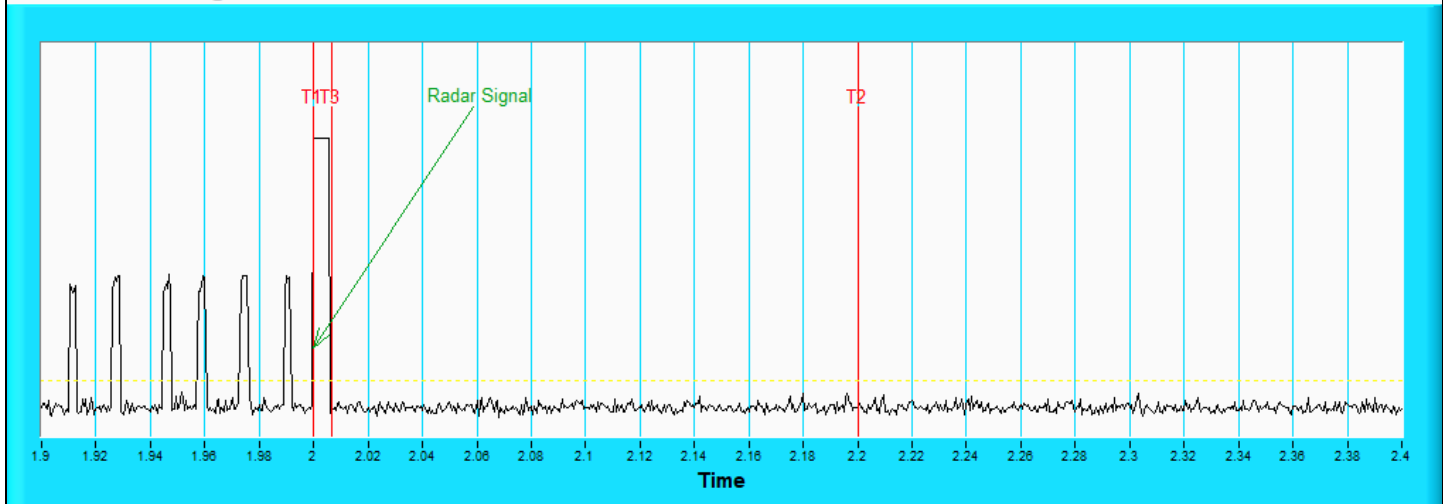

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 4

Channel Closing Transmission Time & Channel Move Time

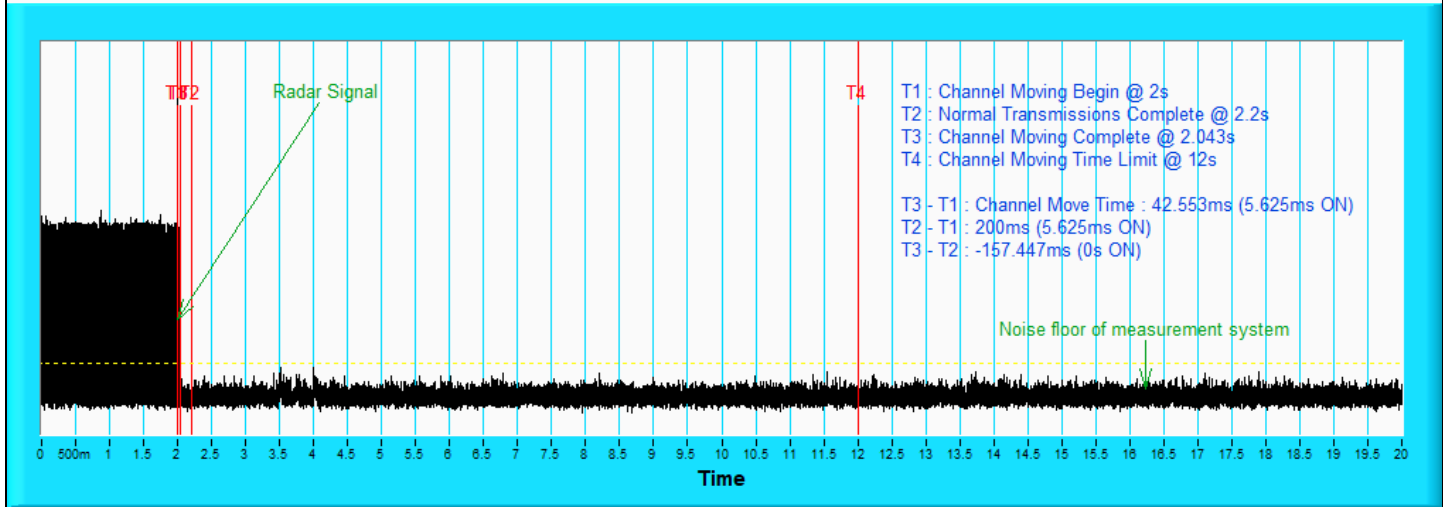

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Channel Closing Transmission Time & Channel Move Time

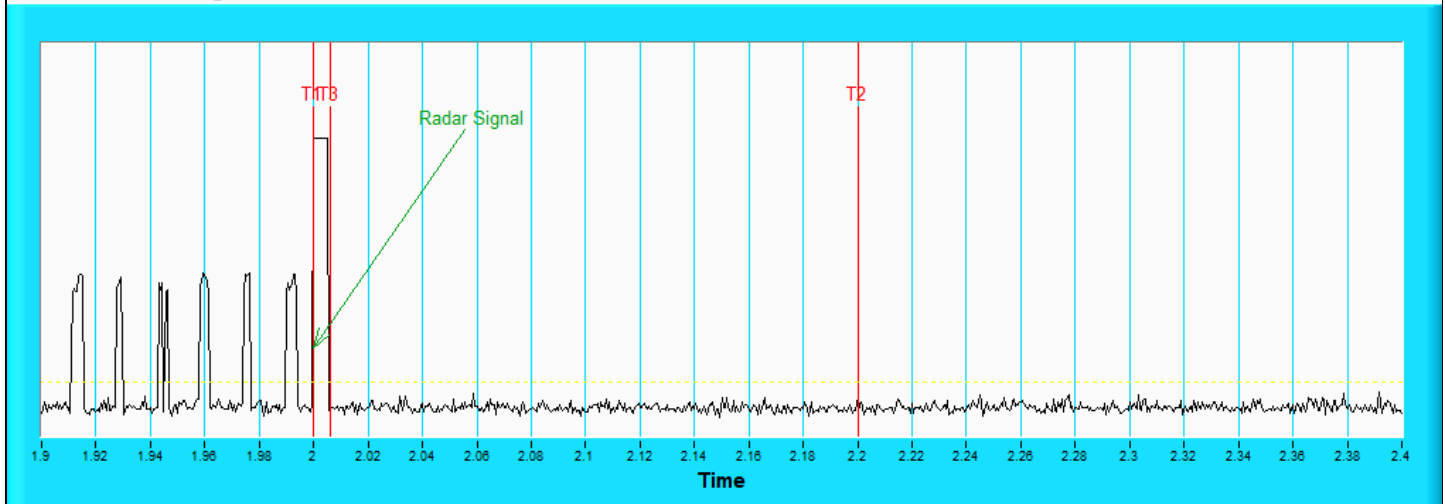


Note: Zoom in of the first 500 ms after radar signal applied.

7.4 Non-Occupancy Period


Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------

For Associated Test

1) Test results demonstrating an associated client link is established with the master on a test frequency.

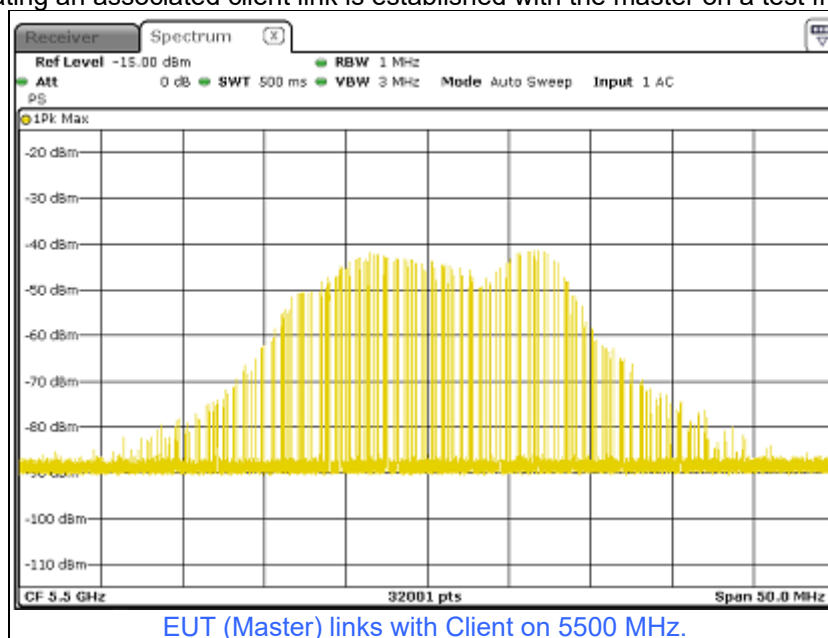


2) The Master and DFS-certified client device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

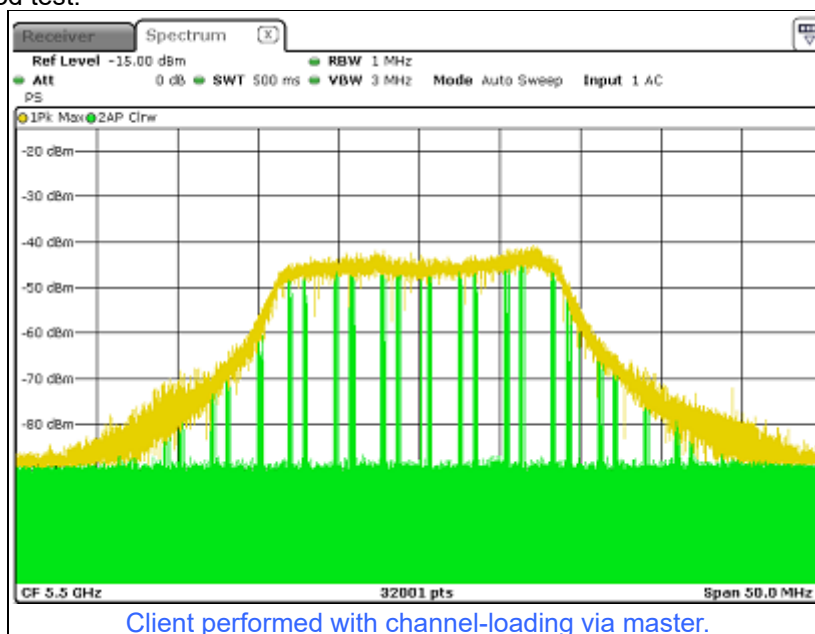

3). The device transmits one type of radar as specified in the DFS Order.

	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 0	1.0	1428.0	18	25704.0
Download	1	Type 0	1.0	1428.0	18	25704.0
Download	2	Type 0	1.0	1428.0	18	25704.0
Download	3	Type 0	1.0	1428.0	18	25704.0
Download	4	Type 0	1.0	1428.0	18	25704.0
Download	5	Type 0	1.0	1428.0	18	25704.0
Download	6	Type 0	1.0	1428.0	18	25704.0
Download	7	Type 0	1.0	1428.0	18	25704.0
Download	8	Type 0	1.0	1428.0	18	25704.0
Download	9	Type 0	1.0	1428.0	18	25704.0
Download	10	Type 0	1.0	1428.0	18	25704.0
Download	11	Type 0	1.0	1428.0	18	25704.0
Download	12	Type 0	1.0	1428.0	18	25704.0
Download	13	Type 0	1.0	1428.0	18	25704.0
Download	14	Type 0	1.0	1428.0	18	25704.0
Download	15	Type 0	1.0	1428.0	18	25704.0
Download	16	Type 0	1.0	1428.0	18	25704.0


DFS Test Tool

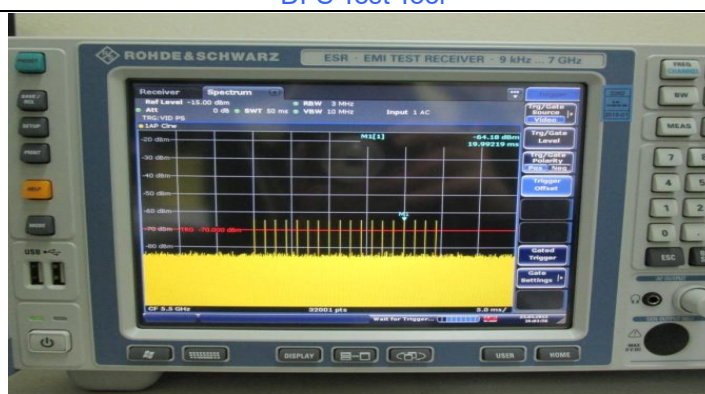

Radar 0 is used to test during DFS test

- 4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
 Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
 5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

Non - Occupancy Period

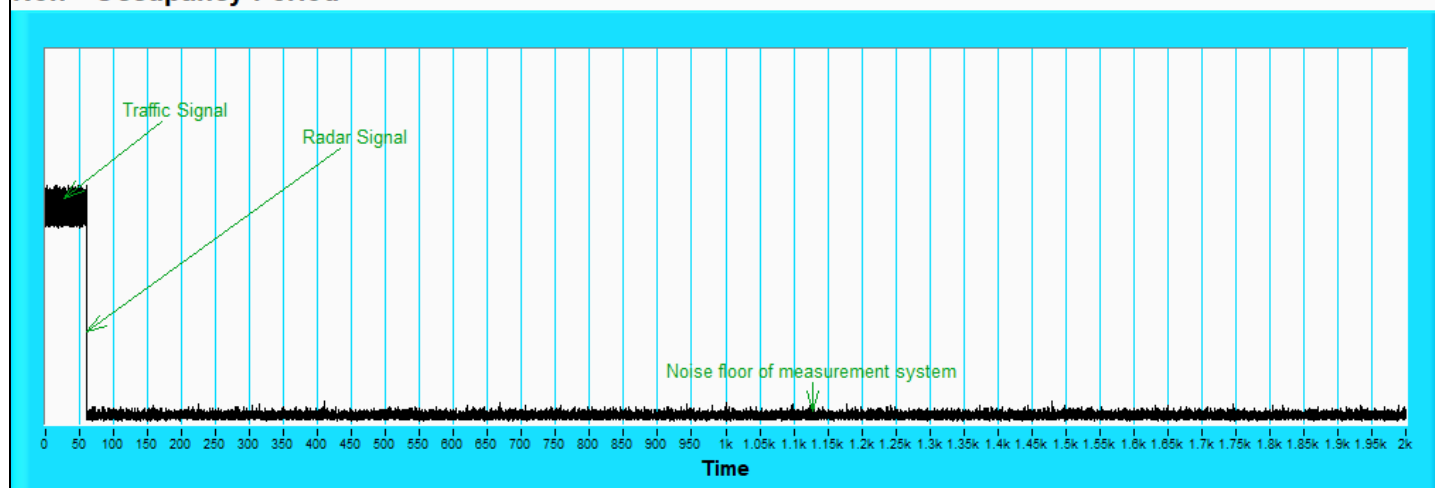

7.5 Statistical Performance Check

Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih
---------------------------	--------------	------------	-----------

Radar Type	Number of Trials (Times)	Percentage of Successful Detection						Minimum Percentage of Successful Detection	Test Result
		802.11be (EHT20)	802.11be (EHT40)	802.11be (EHT80)	802.11be (EHT160) CH50	802.11be (EHT160) CH114	802.11be (EHT240)		
1	30	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	60%	Pass
2	30	93.3%	93.3%	93.3%	90.0%	96.7%	100.0%	60%	Pass
3	30	86.7%	86.7%	80.0%	63.3%	80.0%	83.3%	60%	Pass
4	30	80.0%	76.7%	83.3%	70.0%	73.3%	80.0%	60%	Pass
Aggregate (Radar Types 1 - 4)		90.0%	89.2%	89.2%	80.8%	87.5%	90.8%	80%	Pass
5	30	96.7%	100.0%	100.0%	100.0%	100.0%	96.7%	80%	Pass
6	30	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	70%	Pass

802.11be (EHT20) 5500MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5494	22	1066.1	57	938	Yes
2	5504	10	1432.7	76	698	Yes
3	5490	6	1618.1	86	618	Yes
4	5493	2	1858.7	99	538	Yes
5	5496	19	1139	61	878	Yes
6	5497	23	326.2	18	3066	Yes
7	5508	7	1567.4	83	638	Yes
8	5505	21	1089.3	58	918	Yes
9	5498	17	1193.3	63	838	Yes
10	5499	18	1165.5	62	858	Yes
11	5500	15	1253.1	67	798	Yes
12	5510	11	1392.8	74	718	Yes
13	5502	4	1730.1	92	578	Yes
14	5495	5	1672.2	89	598	Yes
15	5507	3	1792.1	95	558	Yes
16	5503	-	394.3	21	2536	Yes
17	5509	-	1035.2	55	966	Yes
18	5506	-	1209.2	64	827	Yes
19	5492	-	399.8	22	2501	Yes
20	5491	-	385.4	21	2595	Yes
21	5501	-	897.7	48	1114	Yes
22	5494	-	768	41	1302	Yes
23	5507	-	328.4	18	3045	Yes
24	5495	-	615.8	33	1624	Yes
25	5504	-	347.5	19	2878	Yes
26	5500	-	973.7	52	1027	Yes
27	5491	-	402.4	22	2485	Yes
28	5492	-	625	33	1600	Yes
29	5496	-	853.2	46	1172	Yes
30	5498	-	849.6	45	1177	Yes
						Detection Rate: 100%

802.11be (EHT20) 5500MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5492	26	3.2	179	Yes
2	5506	23	1.1	207	Yes
3	5490	24	2.1	230	Yes
4	5504	29	4.8	200	Yes
5	5502	28	3.9	214	Yes
6	5499	26	2.9	222	Yes
7	5496	26	3.2	204	Yes
8	5505	25	2.5	192	Yes
9	5497	26	3.1	164	Yes
10	5495	23	1.2	156	Yes
11	5508	27	3.9	210	Yes
12	5501	29	4.6	201	Yes
13	5493	26	3.2	162	Yes
14	5503	25	2.2	197	Yes
15	5494	29	4.5	163	Yes
16	5509	26	3	203	Yes
17	5510	29	5	168	Yes
18	5507	25	2.4	217	No
19	5491	26	2.9	191	Yes
20	5498	25	2.3	166	Yes
21	5500	27	3.7	150	Yes
22	5508	25	2.2	176	Yes
23	5495	29	4.9	195	Yes
24	5504	26	2.9	202	Yes
25	5493	25	2.5	178	Yes
26	5502	23	1.1	206	No
27	5499	27	3.8	155	Yes
28	5510	29	4.7	157	Yes
29	5494	25	2.4	224	Yes
30	5505	28	4.2	159	Yes
					Detection Rate: 93.3%

802.11be (EHT20) 5500MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5495	17	8.2	355	No
2	5498	16	6.1	487	Yes
3	5492	16	7.1	344	Yes
4	5500	18	9.8	288	Yes
5	5501	18	8.9	230	Yes
6	5502	17	7.9	432	Yes
7	5508	17	8.2	207	No
8	5499	17	7.5	443	Yes
9	5491	17	8.1	439	Yes
10	5507	16	6.2	223	Yes
11	5510	18	8.9	208	Yes
12	5493	18	9.6	463	Yes
13	5496	17	8.2	441	No
14	5503	16	7.2	323	Yes
15	5509	18	9.5	297	Yes
16	5504	17	8	412	Yes
17	5506	18	10	324	Yes
18	5497	17	7.4	271	Yes
19	5505	17	7.9	349	Yes
20	5494	16	7.3	409	Yes
21	5490	18	8.7	373	Yes
22	5507	16	7.2	254	Yes
23	5506	18	9.9	274	Yes
24	5502	17	7.9	278	Yes
25	5491	17	7.5	317	Yes
26	5493	16	6.1	260	No
27	5505	18	8.8	211	Yes
28	5508	18	9.7	272	Yes
29	5498	17	7.4	264	Yes
30	5504	18	9.2	284	Yes
					Detection Rate: 86.7%

802.11be (EHT20) 5500MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	14	16	355	Yes
2	5504	12	11.3	487	Yes
3	5510	13	13.5	344	Yes
4	5501	16	19.4	288	Yes
5	5494	15	17.5	230	No
6	5509	14	15.3	432	Yes
7	5491	14	15.9	207	Yes
8	5507	13	14.3	443	Yes
9	5506	14	15.8	439	Yes
10	5508	12	11.5	223	Yes
11	5496	15	17.4	208	Yes
12	5500	16	19	463	Yes
13	5502	14	16	441	No
14	5503	13	13.8	323	Yes
15	5498	16	18.9	297	Yes
16	5493	14	15.5	412	Yes
17	5492	16	19.9	324	Yes
18	5505	13	14.1	271	Yes
19	5499	14	15.2	349	No
20	5497	13	13.8	409	Yes
21	5495	15	17.1	373	Yes
22	5492	13	13.8	254	No
23	5508	16	19.8	274	Yes
24	5510	14	15.3	278	Yes
25	5490	13	14.5	317	Yes
26	5507	12	11.3	260	Yes
27	5502	15	17.3	211	Yes
28	5500	16	19.2	272	No
29	5496	13	14.2	264	Yes
30	5498	15	18.2	284	No
					Detection Rate: 80%

802.11be (EHT20) 5500MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5500	LP_SIGNAL_01	Yes
2	5	5500	LP_SIGNAL_02	Yes
3	9	5500	LP_SIGNAL_03	No
4	19	5500	LP_SIGNAL_04	Yes
5	16	5500	LP_SIGNAL_05	Yes
6	12	5500	LP_SIGNAL_06	Yes
7	13	5500	LP_SIGNAL_07	Yes
8	10	5500	LP_SIGNAL_08	Yes
9	13	5500	LP_SIGNAL_09	Yes
10	6	5500	LP_SIGNAL_10	Yes
11	16	5496.87	LP_SIGNAL_11	Yes
12	19	5498.07	LP_SIGNAL_12	Yes
13	13	5495.67	LP_SIGNAL_13	Yes
14	10	5494.47	LP_SIGNAL_14	Yes
15	18	5497.67	LP_SIGNAL_15	Yes
16	12	5495.27	LP_SIGNAL_16	Yes
17	20	5498.47	LP_SIGNAL_17	Yes
18	10	5494.47	LP_SIGNAL_18	Yes
19	12	5495.27	LP_SIGNAL_19	Yes
20	10	5494.47	LP_SIGNAL_20	Yes
21	15	5503.55	LP_SIGNAL_21	Yes
22	9	5505.95	LP_SIGNAL_22	Yes
23	20	5501.55	LP_SIGNAL_23	Yes
24	12	5504.75	LP_SIGNAL_24	Yes
25	11	5505.15	LP_SIGNAL_25	Yes
26	5	5507.55	LP_SIGNAL_26	Yes
27	16	5503.15	LP_SIGNAL_27	Yes
28	19	5501.95	LP_SIGNAL_28	Yes
29	10	5505.55	LP_SIGNAL_29	Yes
30	17	5502.75	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT20) 5500MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT40) 5510MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5490	23	326.2	18	3066	Yes
2	5503	9	1474.9	78	678	Yes
3	5492	16	1222.5	65	818	Yes
4	5530	5	1672.2	89	598	Yes
5	5509	7	1567.4	83	638	Yes
6	5491	15	1253.1	67	798	Yes
7	5496	12	1355	72	738	Yes
8	5499	20	1113.6	59	898	Yes
9	5510	11	1392.8	74	718	Yes
10	5494	3	1792.1	95	558	Yes
11	5524	19	1139	61	878	Yes
12	5521	17	1193.3	63	838	Yes
13	5520	2	1858.7	99	538	Yes
14	5500	8	1519.8	81	658	Yes
15	5515	22	1066.1	57	938	Yes
16	5501	-	1065	57	939	Yes
17	5508	-	499	27	2004	Yes
18	5507	-	627.7	34	1593	Yes
19	5522	-	636.5	34	1571	Yes
20	5505	-	1179.2	63	848	Yes
21	5498	-	370.8	20	2697	Yes
22	5516	-	590.7	32	1693	Yes
23	5504	-	557.7	30	1793	Yes
24	5497	-	989.1	53	1011	Yes
25	5512	-	349.4	19	2862	Yes
26	5502	-	997	53	1003	Yes
27	5523	-	363.5	20	2751	Yes
28	5525	-	492.9	27	2029	Yes
29	5518	-	1326.3	70	754	Yes
30	5527	-	803.2	43	1245	Yes
						Detection Rate: 100%

802.11be (EHT40) 5510MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5503	29	4.9	210	Yes
2	5491	24	1.7	178	Yes
3	5492	25	2.1	173	Yes
4	5493	28	4	222	Yes
5	5527	27	3.6	219	Yes
6	5517	29	5	212	Yes
7	5498	29	4.9	176	Yes
8	5519	23	1.1	199	Yes
9	5529	23	1.2	162	Yes
10	5526	29	4.5	220	Yes
11	5512	29	5	229	Yes
12	5504	29	5	214	Yes
13	5515	25	2.4	153	Yes
14	5508	28	4.1	197	Yes
15	5513	24	2	211	Yes
16	5505	29	4.6	190	Yes
17	5524	23	1	213	No
18	5494	25	2.4	218	Yes
19	5523	26	3.2	215	Yes
20	5530	26	3.1	157	Yes
21	5520	25	2.7	168	Yes
22	5516	25	2.6	227	Yes
23	5518	24	2	171	No
24	5501	23	1.1	158	Yes
25	5499	23	1	167	Yes
26	5502	29	4.9	150	Yes
27	5496	29	4.8	191	Yes
28	5497	25	2.3	159	Yes
29	5495	28	4.3	226	Yes
30	5507	26	3.3	208	Yes
					Detection Rate: 93.3%

802.11be (EHT40) 5510MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5499	18	9.9	235	Yes
2	5491	16	6.7	357	Yes
3	5525	16	7.1	333	Yes
4	5502	18	9	242	Yes
5	5493	17	8.6	397	Yes
6	5495	18	10	302	Yes
7	5507	18	9.9	203	Yes
8	5524	16	6.1	428	Yes
9	5520	16	6.2	335	No
10	5511	18	9.5	240	Yes
11	5500	18	10	224	Yes
12	5513	18	10	410	Yes
13	5518	17	7.4	359	Yes
14	5496	18	9.1	269	Yes
15	5492	16	7	250	Yes
16	5503	18	9.6	247	Yes
17	5497	16	6	222	Yes
18	5505	17	7.4	424	Yes
19	5504	17	8.2	393	Yes
20	5528	17	8.1	382	Yes
21	5514	17	7.7	486	Yes
22	5515	17	7.6	480	Yes
23	5529	16	7	360	Yes
24	5519	16	6.1	297	No
25	5509	16	6	265	Yes
26	5510	18	9.9	263	Yes
27	5516	18	9.8	324	Yes
28	5523	17	7.3	386	No
29	5526	18	9.3	311	No
30	5498	17	8.3	378	Yes
					Detection Rate: 86.7%

802.11be (EHT40) 5510MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5507	16	19.7	235	Yes
2	5519	12	12.7	357	Yes
3	5492	13	13.6	333	Yes
4	5527	15	17.7	242	No
5	5515	15	16.8	397	Yes
6	5520	16	20	302	Yes
7	5528	16	19.7	203	Yes
8	5523	12	11.3	428	No
9	5490	12	11.5	335	No
10	5499	16	18.8	240	Yes
11	5514	16	20	224	Yes
12	5498	16	20	410	Yes
13	5529	13	14.2	359	Yes
14	5511	15	18	269	Yes
15	5513	13	13.3	250	Yes
16	5518	16	19	247	No
17	5504	12	11.1	222	Yes
18	5505	13	14.2	424	Yes
19	5497	14	15.9	393	Yes
20	5509	14	15.8	382	No
21	5493	14	14.8	486	Yes
22	5503	13	14.6	480	Yes
23	5508	13	13.2	360	Yes
24	5526	12	11.3	297	Yes
25	5524	12	11	265	Yes
26	5522	16	19.6	263	No
27	5517	16	19.6	324	Yes
28	5512	13	14	386	Yes
29	5516	16	18.3	311	No
30	5530	14	16.1	378	Yes
					Detection Rate: 76.7%

802.11be (EHT40) 5510MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5510	LP_SIGNAL_01	Yes
2	5	5510	LP_SIGNAL_02	Yes
3	9	5510	LP_SIGNAL_03	Yes
4	19	5510	LP_SIGNAL_04	Yes
5	16	5510	LP_SIGNAL_05	Yes
6	12	5510	LP_SIGNAL_06	Yes
7	13	5510	LP_SIGNAL_07	Yes
8	10	5510	LP_SIGNAL_08	Yes
9	13	5510	LP_SIGNAL_09	Yes
10	6	5510	LP_SIGNAL_10	Yes
11	16	5497.25	LP_SIGNAL_11	Yes
12	19	5498.45	LP_SIGNAL_12	Yes
13	13	5496.05	LP_SIGNAL_13	Yes
14	10	5494.85	LP_SIGNAL_14	Yes
15	18	5498.05	LP_SIGNAL_15	Yes
16	12	5495.65	LP_SIGNAL_16	Yes
17	20	5498.85	LP_SIGNAL_17	Yes
18	10	5494.85	LP_SIGNAL_18	Yes
19	12	5495.65	LP_SIGNAL_19	Yes
20	10	5494.85	LP_SIGNAL_20	Yes
21	15	5523.09	LP_SIGNAL_21	Yes
22	9	5525.49	LP_SIGNAL_22	Yes
23	20	5521.09	LP_SIGNAL_23	Yes
24	12	5524.29	LP_SIGNAL_24	Yes
25	11	5524.69	LP_SIGNAL_25	Yes
26	5	5527.09	LP_SIGNAL_26	Yes
27	16	5522.69	LP_SIGNAL_27	Yes
28	19	5521.49	LP_SIGNAL_28	Yes
29	10	5525.09	LP_SIGNAL_29	Yes
30	17	5522.29	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT40) 5510MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT80) 5530MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5490	18	1165.5	62	858	Yes
2	5491	20	1113.6	59	898	Yes
3	5545	8	1519.8	81	658	Yes
4	5548	19	1139	61	878	Yes
5	5519	6	1618.1	86	618	Yes
6	5506	12	1355	72	738	Yes
7	5565	5	1672.2	89	598	Yes
8	5497	7	1567.4	83	638	Yes
9	5568	22	1066.1	57	938	Yes
10	5517	2	1858.7	99	538	Yes
11	5500	9	1474.9	78	678	Yes
12	5531	14	1285.3	68	778	Yes
13	5569	21	1089.3	58	918	Yes
14	5549	10	1432.7	76	698	Yes
15	5504	3	1792.1	95	558	Yes
16	5505	-	327.8	18	3051	Yes
17	5541	-	425.4	23	2351	Yes
18	5507	-	1085.8	58	921	Yes
19	5533	-	643.1	34	1555	Yes
20	5543	-	386.1	21	2590	Yes
21	5513	-	635.7	34	1573	Yes
22	5498	-	1733.1	92	577	Yes
23	5560	-	479.2	26	2087	Yes
24	5534	-	1003	53	997	Yes
25	5550	-	424.1	23	2358	Yes
26	5554	-	638.6	34	1566	Yes
27	5499	-	412.5	22	2424	Yes
28	5524	-	501.5	27	1994	Yes
29	5528	-	520	28	1923	Yes
30	5494	-	1412.4	75	708	Yes
						Detection Rate: 100%

802.11be (EHT80) 5530MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5496	23	1.3	228	Yes
2	5515	26	3.2	172	Yes
3	5514	27	3.9	212	Yes
4	5493	24	1.9	213	Yes
5	5523	27	3.6	150	Yes
6	5538	26	3.3	158	Yes
7	5503	29	4.9	210	No
8	5525	23	1.3	223	Yes
9	5498	29	4.9	152	Yes
10	5537	27	3.3	190	Yes
11	5500	25	2.7	203	Yes
12	5524	29	5	227	Yes
13	5551	26	3.3	196	Yes
14	5512	28	4.4	198	Yes
15	5497	24	1.9	161	Yes
16	5510	27	3.6	226	Yes
17	5549	26	2.8	181	Yes
18	5531	25	2.5	167	Yes
19	5548	23	1.3	178	Yes
20	5507	25	2.4	187	Yes
21	5505	29	4.8	153	Yes
22	5511	27	3.5	201	Yes
23	5502	23	1.3	166	Yes
24	5513	29	4.8	155	Yes
25	5568	28	4.3	221	Yes
26	5506	26	3.2	191	Yes
27	5516	24	1.7	192	Yes
28	5494	23	1.2	164	No
29	5566	25	2.4	154	Yes
30	5509	29	5	207	Yes
					Detection Rate: 93.3%

802.11be (EHT80) 5530MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5527	16	6.3	403	No
2	5491	17	8.2	313	Yes
3	5533	18	8.9	214	No
4	5566	16	6.9	262	Yes
5	5569	17	8.6	273	Yes
6	5530	17	8.3	470	Yes
7	5516	18	9.9	453	Yes
8	5500	16	6.3	378	Yes
9	5526	18	9.9	483	Yes
10	5561	17	8.3	317	Yes
11	5552	17	7.7	385	Yes
12	5501	18	10	275	Yes
13	5502	17	8.3	497	Yes
14	5543	18	9.4	420	Yes
15	5506	16	6.9	366	No
16	5565	17	8.6	414	Yes
17	5544	17	7.8	444	Yes
18	5542	17	7.5	427	Yes
19	5560	16	6.3	338	No
20	5549	17	7.4	436	Yes
21	5559	18	9.8	265	Yes
22	5496	17	8.5	451	Yes
23	5536	16	6.3	274	Yes
24	5513	18	9.8	417	No
25	5545	18	9.3	330	Yes
26	5503	17	8.2	472	Yes
27	5511	16	6.7	333	Yes
28	5548	16	6.2	377	No
29	5510	17	7.4	394	Yes
30	5519	18	10	296	Yes
					Detection Rate: 80%

802.11be (EHT80) 5530MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	12	11.7	403	No
2	5491	14	15.9	313	Yes
3	5542	15	17.4	214	Yes
4	5543	13	13.2	262	Yes
5	5556	15	16.8	273	Yes
6	5558	14	16.1	470	Yes
7	5536	16	19.8	453	Yes
8	5569	12	11.7	378	Yes
9	5498	16	19.8	483	Yes
10	5538	14	16.2	317	Yes
11	5494	14	14.8	385	Yes
12	5545	16	19.9	275	No
13	5523	14	16.1	497	Yes
14	5511	16	18.6	420	Yes
15	5522	13	13.2	366	Yes
16	5500	15	16.9	414	Yes
17	5539	14	15	444	Yes
18	5549	13	14.4	427	Yes
19	5510	12	11.7	338	Yes
20	5509	13	14.2	436	No
21	5534	16	19.6	265	Yes
22	5508	15	16.5	451	Yes
23	5501	12	11.7	274	Yes
24	5528	16	19.4	417	Yes
25	5531	16	18.3	330	Yes
26	5507	14	15.9	472	Yes
27	5567	12	12.5	333	Yes
28	5547	12	11.5	377	No
29	5537	13	14.2	394	No
30	5519	16	19.8	296	Yes
					Detection Rate: 83.3%

802.11be (EHT80) 5530MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	11	5530	LP_SIGNAL_01	Yes
2	12	5530	LP_SIGNAL_02	Yes
3	5	5530	LP_SIGNAL_03	Yes
4	12	5530	LP_SIGNAL_04	Yes
5	9	5530	LP_SIGNAL_05	Yes
6	11	5530	LP_SIGNAL_06	Yes
7	20	5530	LP_SIGNAL_07	Yes
8	20	5530	LP_SIGNAL_08	Yes
9	6	5530	LP_SIGNAL_09	Yes
10	14	5530	LP_SIGNAL_10	Yes
11	19	5498.71	LP_SIGNAL_11	Yes
12	12	5495.91	LP_SIGNAL_12	Yes
13	18	5498.31	LP_SIGNAL_13	Yes
14	7	5493.91	LP_SIGNAL_14	Yes
15	9	5494.71	LP_SIGNAL_15	Yes
16	15	5497.11	LP_SIGNAL_16	Yes
17	15	5497.11	LP_SIGNAL_17	Yes
18	14	5496.71	LP_SIGNAL_18	Yes
19	19	5498.71	LP_SIGNAL_19	Yes
20	17	5497.91	LP_SIGNAL_20	Yes
21	5	5566.89	LP_SIGNAL_21	Yes
22	5	5566.89	LP_SIGNAL_22	Yes
23	13	5563.69	LP_SIGNAL_23	Yes
24	7	5566.09	LP_SIGNAL_24	Yes
25	14	5563.29	LP_SIGNAL_25	Yes
26	10	5564.89	LP_SIGNAL_26	Yes
27	15	5562.89	LP_SIGNAL_27	Yes
28	9	5565.29	LP_SIGNAL_28	Yes
29	5	5566.89	LP_SIGNAL_29	Yes
30	10	5564.89	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT80) 5530MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5313	18	1165.5	62	858	Yes
2	5302	20	1113.6	59	898	Yes
3	5323	8	1519.8	81	658	Yes
4	5300	19	1139	61	878	Yes
5	5279	6	1618.1	86	618	Yes
6	5329	12	1355	72	738	Yes
7	5286	5	1672.2	89	598	Yes
8	5278	7	1567.4	83	638	Yes
9	5303	22	1066.1	57	938	Yes
10	5252	2	1858.7	99	538	Yes
11	5311	9	1474.9	78	678	Yes
12	5277	14	1285.3	68	778	Yes
13	5269	21	1089.3	58	918	Yes
14	5325	10	1432.7	76	698	Yes
15	5276	3	1792.1	95	558	Yes
16	5320	-	327.8	18	3051	Yes
17	5295	-	425.4	23	2351	Yes
18	5264	-	1085.8	58	921	Yes
19	5268	-	643.1	34	1555	Yes
20	5290	-	386.1	21	2590	Yes
21	5291	-	635.7	34	1573	Yes
22	5310	-	1733.1	92	577	Yes
23	5272	-	479.2	26	2087	Yes
24	5261	-	1003	53	997	Yes
25	5318	-	424.1	23	2358	Yes
26	5299	-	638.6	34	1566	Yes
27	5262	-	412.5	22	2424	Yes
28	5321	-	501.5	27	1994	Yes
29	5257	-	520	28	1923	Yes
30	5283	-	1412.4	75	708	Yes
						Detection Rate: 100%

802.11be (EHT160) 5250MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5321	23	1.3	228	Yes
2	5327	26	3.2	172	Yes
3	5319	27	3.9	212	Yes
4	5253	24	1.9	213	Yes
5	5308	27	3.6	150	Yes
6	5255	26	3.3	158	Yes
7	5296	29	4.9	210	No
8	5269	23	1.3	223	Yes
9	5258	29	4.9	152	Yes
10	5279	27	3.3	190	Yes
11	5310	25	2.7	203	Yes
12	5260	29	5	227	Yes
13	5262	26	3.3	196	Yes
14	5263	28	4.4	198	Yes
15	5278	24	1.9	161	Yes
16	5290	27	3.6	226	No
17	5311	26	2.8	181	Yes
18	5285	25	2.5	167	Yes
19	5297	23	1.3	178	Yes
20	5276	25	2.4	187	Yes
21	5309	29	4.8	153	Yes
22	5305	27	3.5	201	Yes
23	5307	23	1.3	166	Yes
24	5281	29	4.8	155	Yes
25	5274	28	4.3	221	Yes
26	5275	26	3.2	191	Yes
27	5324	24	1.7	192	Yes
28	5264	23	1.2	164	Yes
29	5293	25	2.4	154	No
30	5326	29	5	207	Yes
					Detection Rate: 90%

802.11be (EHT160) 5250MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5269	16	6.3	403	Yes
2	5319	17	8.2	313	Yes
3	5260	18	8.9	214	Yes
4	5305	16	6.9	262	Yes
5	5283	17	8.6	273	Yes
6	5277	17	8.3	470	Yes
7	5272	18	9.9	453	Yes
8	5271	16	6.3	378	No
9	5324	18	9.9	483	Yes
10	5328	17	8.3	317	No
11	5306	17	7.7	385	No
12	5320	18	10	275	No
13	5262	17	8.3	497	Yes
14	5257	18	9.4	420	No
15	5326	16	6.9	366	No
16	5263	17	8.6	414	No
17	5310	17	7.8	444	Yes
18	5285	17	7.5	427	Yes
19	5291	16	6.3	338	Yes
20	5281	17	7.4	436	Yes
21	5311	18	9.8	265	No
22	5270	17	8.5	451	Yes
23	5250	16	6.3	274	Yes
24	5298	18	9.8	417	No
25	5280	18	9.3	330	No
26	5275	17	8.2	472	Yes
27	5278	16	6.7	333	Yes
28	5253	16	6.2	377	Yes
29	5254	17	7.4	394	No
30	5265	18	10	296	Yes
Detection Rate: 63.3%					

802.11be (EHT160) 5250MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5265	12	11.7	403	Yes
2	5251	14	15.9	313	Yes
3	5328	15	17.4	214	Yes
4	5292	13	13.2	262	No
5	5255	15	16.8	273	Yes
6	5329	14	16.1	470	No
7	5318	16	19.8	453	Yes
8	5315	12	11.7	378	No
9	5296	16	19.8	483	Yes
10	5254	14	16.2	317	Yes
11	5260	14	14.8	385	Yes
12	5314	16	19.9	275	Yes
13	5321	14	16.1	497	Yes
14	5263	16	18.6	420	Yes
15	5250	13	13.2	366	No
16	5261	15	16.9	414	No
17	5322	14	15	444	Yes
18	5287	13	14.4	427	Yes
19	5316	12	11.7	338	No
20	5275	13	14.2	436	Yes
21	5311	16	19.6	265	Yes
22	5272	15	16.5	451	Yes
23	5269	12	11.7	274	Yes
24	5330	16	19.4	417	No
25	5271	16	18.3	330	Yes
26	5300	14	15.9	472	Yes
27	5276	12	12.5	333	Yes
28	5273	12	11.5	377	No
29	5324	13	14.2	394	No
30	5257	16	19.8	296	Yes
					Detection Rate: 70%

802.11be (EHT160) 5250MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5290	LP_SIGNAL_01	Yes
2	5	5290	LP_SIGNAL_02	Yes
3	9	5290	LP_SIGNAL_03	Yes
4	19	5290	LP_SIGNAL_04	Yes
5	16	5290	LP_SIGNAL_05	Yes
6	12	5290	LP_SIGNAL_06	Yes
7	13	5290	LP_SIGNAL_07	Yes
8	10	5290	LP_SIGNAL_08	Yes
9	13	5290	LP_SIGNAL_09	Yes
10	6	5290	LP_SIGNAL_10	Yes
11	16	5256.4	LP_SIGNAL_11	Yes
12	19	5257.6	LP_SIGNAL_12	Yes
13	13	5255.2	LP_SIGNAL_13	Yes
14	10	5254	LP_SIGNAL_14	Yes
15	18	5257.2	LP_SIGNAL_15	Yes
16	12	5254.8	LP_SIGNAL_16	Yes
17	20	5258	LP_SIGNAL_17	Yes
18	10	5254	LP_SIGNAL_18	Yes
19	12	5254.8	LP_SIGNAL_19	Yes
20	10	5254	LP_SIGNAL_20	Yes
21	15	5322.31	LP_SIGNAL_21	Yes
22	9	5324.71	LP_SIGNAL_22	Yes
23	20	5320.31	LP_SIGNAL_23	Yes
24	12	5323.51	LP_SIGNAL_24	Yes
25	11	5323.91	LP_SIGNAL_25	Yes
26	5	5326.31	LP_SIGNAL_26	Yes
27	16	5321.91	LP_SIGNAL_27	Yes
28	19	5320.71	LP_SIGNAL_28	Yes
29	10	5324.31	LP_SIGNAL_29	Yes
30	17	5321.51	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5250MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT160) 5570MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5587	22	1066.1	57	938	Yes
2	5495	1	1930.5	102	518	Yes
3	5631	2	1858.7	99	538	Yes
4	5493	21	1089.3	58	918	Yes
5	5494	15	1253.1	67	798	Yes
6	5647	18	1165.5	62	858	Yes
7	5593	9	1474.9	78	678	Yes
8	5491	16	1222.5	65	818	Yes
9	5520	11	1392.8	74	718	Yes
10	5611	8	1519.8	81	658	Yes
11	5625	6	1618.1	86	618	Yes
12	5557	19	1139	61	878	Yes
13	5496	17	1193.3	63	838	Yes
14	5582	23	326.2	18	3066	Yes
15	5615	7	1567.4	83	638	Yes
16	5527	-	596.3	32	1677	Yes
17	5649	-	404.5	22	2472	Yes
18	5537	-	610.1	33	1639	Yes
19	5528	-	498.5	27	2006	Yes
20	5561	-	761	41	1314	Yes
21	5641	-	390.8	21	2559	Yes
22	5533	-	925.9	49	1080	Yes
23	5512	-	986.2	53	1014	Yes
24	5513	-	373.3	20	2679	Yes
25	5562	-	914.9	49	1093	Yes
26	5515	-	784.3	42	1275	Yes
27	5633	-	770.4	41	1298	Yes
28	5570	-	349.5	19	2861	Yes
29	5553	-	397	21	2519	Yes
30	5548	-	963.4	51	1038	Yes
						Detection Rate: 100%

802.11be (EHT160) 5570MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5575	25	2.3	199	Yes
2	5525	24	1.7	229	Yes
3	5631	24	1.6	169	Yes
4	5493	28	4	218	Yes
5	5516	24	1.6	185	Yes
6	5580	28	4.3	196	Yes
7	5521	25	2.5	160	Yes
8	5648	27	3.5	167	Yes
9	5498	26	2.7	176	No
10	5519	27	3.8	209	Yes
11	5500	26	2.9	180	Yes
12	5640	28	4.3	157	Yes
13	5530	24	1.6	181	Yes
14	5503	29	4.7	162	Yes
15	5602	28	4.3	182	Yes
16	5547	23	1.2	215	Yes
17	5605	26	3	205	Yes
18	5639	24	2.1	197	Yes
19	5584	26	3.1	155	Yes
20	5532	24	2	220	Yes
21	5608	27	3.5	204	Yes
22	5511	24	2	200	Yes
23	5554	23	1	161	Yes
24	5513	24	1.9	230	Yes
25	5526	29	4.9	206	Yes
26	5638	26	3.1	210	Yes
27	5629	24	1.8	221	Yes
28	5595	29	4.5	227	Yes
29	5645	23	1	151	Yes
30	5527	23	1.3	216	Yes
					Detection Rate: 96.7%

802.11be (EHT160) 5570MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5541	16	7.3	378	Yes
2	5609	16	6.7	455	No
3	5565	16	6.6	473	No
4	5567	18	9	462	Yes
5	5648	16	6.6	436	No
6	5629	18	9.3	406	Yes
7	5496	17	7.5	213	Yes
8	5560	17	8.5	417	Yes
9	5571	17	7.7	317	No
10	5491	18	8.8	444	Yes
11	5591	17	7.9	223	Yes
12	5515	18	9.3	297	Yes
13	5502	16	6.6	495	No
14	5596	18	9.7	325	Yes
15	5588	18	9.3	221	Yes
16	5501	16	6.2	238	No
17	5524	17	8	247	Yes
18	5509	16	7.1	225	Yes
19	5604	17	8.1	361	Yes
20	5636	16	7	275	Yes
21	5632	17	8.5	306	Yes
22	5586	16	7	418	Yes
23	5535	16	6	327	Yes
24	5507	16	6.9	457	Yes
25	5522	18	9.9	328	Yes
26	5508	17	8.1	278	Yes
27	5528	16	6.8	366	Yes
28	5539	18	9.5	326	Yes
29	5589	16	6	380	Yes
30	5576	16	6.3	254	Yes
					Detection Rate: 80%

802.11be (EHT160) 5570MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5603	13	13.9	378	Yes
2	5553	12	12.7	455	No
3	5564	12	12.5	473	Yes
4	5644	15	17.7	462	Yes
5	5494	12	12.5	436	Yes
6	5595	16	18.3	406	No
7	5496	13	14.5	213	Yes
8	5576	15	16.5	417	Yes
9	5507	14	14.9	317	Yes
10	5530	15	17.2	444	Yes
11	5500	14	15.3	223	Yes
12	5501	16	18.3	297	Yes
13	5568	12	12.3	495	No
14	5518	16	19.3	325	Yes
15	5630	16	18.5	221	Yes
16	5547	12	11.5	238	Yes
17	5552	14	15.4	247	Yes
18	5575	13	13.4	225	No
19	5570	14	15.7	361	Yes
20	5611	13	13.2	275	No
21	5557	15	16.7	306	No
22	5649	13	13.4	418	Yes
23	5638	12	11	327	Yes
24	5590	13	13.1	457	No
25	5514	16	19.6	328	Yes
26	5499	14	15.8	278	Yes
27	5516	13	12.8	366	Yes
28	5543	16	18.8	326	No
29	5585	12	11	380	Yes
30	5519	12	11.7	254	Yes
					Detection Rate: 73.3%

802.11be (EHT160) 5570MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5570	LP_SIGNAL_01	Yes
2	5	5570	LP_SIGNAL_02	Yes
3	9	5570	LP_SIGNAL_03	Yes
4	19	5570	LP_SIGNAL_04	Yes
5	16	5570	LP_SIGNAL_05	Yes
6	12	5570	LP_SIGNAL_06	Yes
7	13	5570	LP_SIGNAL_07	Yes
8	10	5570	LP_SIGNAL_08	Yes
9	13	5570	LP_SIGNAL_09	Yes
10	6	5570	LP_SIGNAL_10	Yes
11	16	5496.69	LP_SIGNAL_11	Yes
12	19	5497.89	LP_SIGNAL_12	Yes
13	13	5495.49	LP_SIGNAL_13	Yes
14	10	5494.29	LP_SIGNAL_14	Yes
15	18	5497.49	LP_SIGNAL_15	Yes
16	12	5495.09	LP_SIGNAL_16	Yes
17	20	5498.29	LP_SIGNAL_17	Yes
18	10	5494.29	LP_SIGNAL_18	Yes
19	12	5495.09	LP_SIGNAL_19	Yes
20	10	5494.29	LP_SIGNAL_20	Yes
21	15	5641.01	LP_SIGNAL_21	Yes
22	9	5643.41	LP_SIGNAL_22	Yes
23	20	5639.01	LP_SIGNAL_23	Yes
24	12	5642.21	LP_SIGNAL_24	Yes
25	11	5642.61	LP_SIGNAL_25	Yes
26	5	5645.01	LP_SIGNAL_26	Yes
27	16	5640.61	LP_SIGNAL_27	Yes
28	19	5639.41	LP_SIGNAL_28	Yes
29	10	5643.01	LP_SIGNAL_29	Yes
30	17	5640.21	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5570MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

802.11be (EHT240) 5610MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5629	22	1066.1	57	938	Yes
2	5555	10	1432.7	76	698	Yes
3	5607	6	1618.1	86	618	Yes
4	5641	2	1858.7	99	538	Yes
5	5600	19	1139	61	878	Yes
6	5713	23	326.2	18	3066	Yes
7	5657	7	1567.4	83	638	Yes
8	5497	21	1089.3	58	918	Yes
9	5707	17	1193.3	63	838	Yes
10	5535	18	1165.5	62	858	Yes
11	5711	15	1253.1	67	798	Yes
12	5510	11	1392.8	74	718	Yes
13	5582	4	1730.1	92	578	Yes
14	5656	5	1672.2	89	598	Yes
15	5504	3	1792.1	95	558	Yes
16	5642	-	394.3	21	2536	Yes
17	5491	-	1035.2	55	966	Yes
18	5694	-	1209.2	64	827	Yes
19	5723	-	399.8	22	2501	Yes
20	5498	-	385.4	21	2595	Yes
21	5671	-	897.7	48	1114	Yes
22	5590	-	768	41	1302	Yes
23	5715	-	328.4	18	3045	Yes
24	5683	-	615.8	33	1624	Yes
25	5623	-	347.5	19	2878	Yes
26	5509	-	973.7	52	1027	Yes
27	5704	-	402.4	22	2485	Yes
28	5544	-	625	33	1600	Yes
29	5610	-	853.2	46	1172	Yes
30	5639	-	849.6	45	1177	Yes
						Detection Rate: 100%

802.11be (EHT240) 5610MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	26	3.2	179	Yes
2	5534	23	1.1	207	Yes
3	5662	24	2.1	230	Yes
4	5527	29	4.8	200	Yes
5	5707	28	3.9	214	Yes
6	5519	26	2.9	222	Yes
7	5628	26	3.2	204	Yes
8	5599	25	2.5	192	Yes
9	5524	26	3.1	164	Yes
10	5583	23	1.2	156	Yes
11	5543	27	3.9	210	Yes
12	5557	29	4.6	201	Yes
13	5664	26	3.2	162	Yes
14	5722	25	2.2	197	Yes
15	5650	29	4.5	163	Yes
16	5555	26	3	203	Yes
17	5567	29	5	168	Yes
18	5552	25	2.4	217	Yes
19	5719	26	2.9	191	Yes
20	5509	25	2.3	166	Yes
21	5510	27	3.7	150	Yes
22	5649	25	2.2	176	Yes
23	5547	29	4.9	195	Yes
24	5513	26	2.9	202	Yes
25	5685	25	2.5	178	Yes
26	5502	23	1.1	206	Yes
27	5553	27	3.8	155	Yes
28	5517	29	4.7	157	Yes
29	5516	25	2.4	224	Yes
30	5529	28	4.2	159	Yes
					Detection Rate: 100%

802.11be (EHT240) 5610MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5618	17	8.2	355	Yes
2	5632	16	6.1	487	Yes
3	5641	16	7.1	344	Yes
4	5669	18	9.8	288	Yes
5	5617	18	8.9	230	No
6	5714	17	7.9	432	Yes
7	5527	17	8.2	207	Yes
8	5677	17	7.5	443	Yes
9	5600	17	8.1	439	Yes
10	5615	16	6.2	223	Yes
11	5500	18	8.9	208	Yes
12	5644	18	9.6	463	Yes
13	5502	17	8.2	441	Yes
14	5491	16	7.2	323	No
15	5614	18	9.5	297	Yes
16	5633	17	8	412	Yes
17	5718	18	10	324	Yes
18	5605	17	7.4	271	No
19	5700	17	7.9	349	Yes
20	5530	16	7.3	409	Yes
21	5599	18	8.7	373	Yes
22	5511	16	7.2	254	Yes
23	5556	18	9.9	274	Yes
24	5515	17	7.9	278	Yes
25	5574	17	7.5	317	No
26	5711	16	6.1	260	No
27	5516	18	8.8	211	Yes
28	5675	18	9.7	272	Yes
29	5604	17	7.4	264	Yes
30	5652	18	9.2	284	Yes
					Detection Rate: 83.3%

802.11be (EHT240) 5610MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5721	14	16	355	Yes
2	5535	12	11.3	487	Yes
3	5715	13	13.5	344	Yes
4	5518	16	19.4	288	Yes
5	5674	15	17.5	230	Yes
6	5495	14	15.3	432	Yes
7	5652	14	15.9	207	No
8	5704	13	14.3	443	No
9	5688	14	15.8	439	Yes
10	5498	12	11.5	223	Yes
11	5527	15	17.4	208	Yes
12	5705	16	19	463	Yes
13	5582	14	16	441	Yes
14	5539	13	13.8	323	No
15	5675	16	18.9	297	Yes
16	5515	14	15.5	412	Yes
17	5587	16	19.9	324	Yes
18	5507	13	14.1	271	Yes
19	5578	14	15.2	349	Yes
20	5699	13	13.8	409	Yes
21	5508	15	17.1	373	Yes
22	5678	13	13.8	254	No
23	5616	16	19.8	274	Yes
24	5593	14	15.3	278	No
25	5512	13	14.5	317	Yes
26	5684	12	11.3	260	Yes
27	5695	15	17.3	211	Yes
28	5629	16	19.2	272	No
29	5597	13	14.2	264	Yes
30	5711	15	18.2	284	Yes
					Detection Rate: 80%

802.11be (EHT240) 5610MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	13	5610	LP_SIGNAL_01	Yes
2	5	5610	LP_SIGNAL_02	Yes
3	9	5610	LP_SIGNAL_03	Yes
4	19	5610	LP_SIGNAL_04	Yes
5	16	5610	LP_SIGNAL_05	Yes
6	12	5610	LP_SIGNAL_06	Yes
7	13	5610	LP_SIGNAL_07	Yes
8	10	5610	LP_SIGNAL_08	Yes
9	13	5610	LP_SIGNAL_09	Yes
10	6	5610	LP_SIGNAL_10	No
11	16	5496.72	LP_SIGNAL_11	Yes
12	19	5497.92	LP_SIGNAL_12	Yes
13	13	5495.52	LP_SIGNAL_13	Yes
14	10	5494.32	LP_SIGNAL_14	Yes
15	18	5497.52	LP_SIGNAL_15	Yes
16	12	5495.12	LP_SIGNAL_16	Yes
17	20	5498.32	LP_SIGNAL_17	Yes
18	10	5494.32	LP_SIGNAL_18	Yes
19	12	5495.12	LP_SIGNAL_19	Yes
20	10	5494.32	LP_SIGNAL_20	Yes
21	15	5718.62	LP_SIGNAL_21	Yes
22	9	5721.02	LP_SIGNAL_22	Yes
23	20	5716.62	LP_SIGNAL_23	Yes
24	12	5719.82	LP_SIGNAL_24	Yes
25	11	5720.22	LP_SIGNAL_25	Yes
26	5	5722.62	LP_SIGNAL_26	Yes
27	16	5718.22	LP_SIGNAL_27	Yes
28	19	5717.02	LP_SIGNAL_28	Yes
29	10	5720.62	LP_SIGNAL_29	Yes
30	17	5717.82	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT240) 5610MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 100%

8 Declaration of Conformity by the Manufacturer

8.1 Transmit Power Control (TPC)

U-NII devices operating in DFS Bands (5.25 to 5.35 GHz and 5.47 to 5.725 GHz) shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

The maximum EIRP of this device is 910.149 mW, and it has TPC functionality.

The UUT can adjust a transmitter's output power according to the device's Transmit Power Control (TPC) triggering mechanism. The TPC is controlled by the operation mode declared by the manufacturer.

8.2 Statement of Manufacturer

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

9 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

11 Appendix

11.1 Radar Test Signal

The Long Pulse Radar Pattern

802.11be (EHT20) 5500MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 15						
Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_02						
Number of Bursts in Trial: 8						
Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5496.87MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_12

Number of Bursts in Trial: 19

Chirp Center Frequency: 5498.07MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_13

Number of Bursts in Trial: 15

Chirp Center Frequency: 5495.67MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.47MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5497.67MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.27MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498.47MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.47MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.27MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.47MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5503.55MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5505.95MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5501.55MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5504.75MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5505.15MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5507.55MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5503.15MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5501.95MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5505.55MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5502.75MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT40) 5510MHz

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_01

Number of Bursts in Trial: 15

Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_02

Number of Bursts in Trial: 8

Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5497.25MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.45MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5496.05MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.05MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.65MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.85MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5523.09MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5525.49MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5521.09MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5524.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5524.69MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5527.09MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5522.69MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5521.49MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5525.09MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5522.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT80) 5530MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	71.4	1802	1484	-
2	2	11	72.9	1618	1750	-
3	1	11	52.9	1654	-	-
4	2	11	74	1742	1659	-
5	1	11	63.4	1097	-	-
6	2	11	71.2	1072	1940	-
7	3	11	97	1824	1300	1658
8	3	11	97.9	1279	1115	1411
9	1	11	54.5	1974	-	-
10	2	11	79.6	1304	1378	-
11	3	11	96.2	1471	1233	1921
12	2	11	74.7	1177	1638	-
13	3	11	91	1668	1763	1077

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	57.6	1988	-	-
2	1	12	64.1	1013	-	-
3	2	12	82.6	1611	1070	-
4	2	12	82.3	1991	1683	-
5	2	12	78.8	1702	1478	-
6	3	12	96.1	1813	1847	1995
7	3	12	90	1749	1346	1133
8	1	12	50.6	1710	-	-
9	1	12	52.8	1195	-	-
10	2	12	75.6	1861	1244	-
11	1	12	58.8	1218	-	-
12	2	12	79.1	1544	1775	-
13	1	12	65.7	1186	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	83.6	1369	1139	1441
2	1	5	63.2	1909	-	-
3	1	5	51.6	1664	-	-
4	1	5	66.5	1883	-	-
5	2	5	75.5	1560	1335	-
6	3	5	91.2	1144	1617	1582
7	3	5	95.9	1111	1312	1329
8	1	5	60.7	1754	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	89.3	1564	1977	1832
2	1	12	57.6	1639	-	-
3	2	12	74.3	1600	1127	-
4	2	12	75.7	1631	1125	-
5	3	12	94.3	1353	1464	1984
6	1	12	53.3	1030	-	-
7	2	12	70.7	1677	1798	-
8	1	12	60.8	1836	-	-
9	1	12	63.4	1053	-	-
10	1	12	64.6	1899	-	-
11	2	12	82.6	1725	1082	-
12	3	12	86	1272	1821	1171
13	2	12	69.9	1833	1765	-
14	2	12	79.9	1102	1385	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	51.3	1017	-	-
2	2	9	70.5	1275	1651	-
3	2	9	72.8	1868	1107	-
4	3	9	88.8	1682	1496	1714
5	1	9	58	1389	-	-
6	1	9	66.1	1588	-	-
7	3	9	99.9	1242	1577	1063
8	2	9	68.6	1035	1311	-
9	3	9	97.3	1672	1578	1203
10	3	9	94.1	1660	1348	1783
11	3	9	94.9	1278	1058	1859

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97.8	1376	1735	1705
2	3	11	87.6	1264	1721	1020
3	3	11	83.7	1715	1246	1361
4	3	11	96.3	1078	1815	1116
5	3	11	88.1	1176	1997	1302
6	1	11	54.1	1375	-	-
7	1	11	54.9	1168	-	-
8	2	11	78.9	1467	1657	-
9	2	11	80.3	1148	1568	-
10	2	11	68.3	1963	1402	-
11	1	11	56.4	1848	-	-
12	1	11	58.2	1630	-	-
13	1	11	56.5	1105	-	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_07

Number of Bursts in Trial: 20

Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	84.6	1756	1857	1741
2	3	20	92.7	1470	1236	1262
3	2	20	69.2	1733	1200	-
4	3	20	89.8	1793	1703	1923
5	3	20	89.4	1880	1676	1486
6	1	20	61	1462	-	-
7	2	20	76.2	1280	1918	-
8	3	20	93.1	1299	1661	1110
9	3	20	95.8	1846	1011	1964
10	1	20	53.6	1810	-	-
11	1	20	61.9	1435	-	-
12	2	20	81.1	1744	1864	-
13	3	20	93.7	1875	1392	1212
14	3	20	86.8	1644	1622	1863
15	2	20	83.2	1445	1797	-
16	2	20	79.7	1764	1674	-
17	1	20	60.8	1500	-	-
18	2	20	70.7	1901	1033	-
19	1	20	60.4	1751	-	-
20	2	20	80.2	1626	1730	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	80.9	1545	1603	-
2	3	20	96.5	1189	1449	1225
3	1	20	65.8	1925	-	-
4	3	20	87	1018	1049	1841
5	1	20	64.6	1048	-	-
6	2	20	75.3	1429	1368	-
7	1	20	60.4	1156	-	-
8	2	20	77.7	1681	1307	-
9	1	20	57.1	1625	-	-
10	3	20	89.7	1355	1088	1374
11	1	20	61.6	1537	-	-
12	3	20	94.9	1989	1865	1947
13	1	20	62.2	1234	-	-
14	1	20	66.2	1931	-	-
15	1	20	54.2	1062	-	-
16	1	20	65.4	1014	-	-
17	3	20	96.9	1572	1489	1042
18	1	20	60	1576	-	-
19	2	20	79.2	1757	1993	-
20	3	20	86.2	1237	1607	1060

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	67.9	1522	1835	-
2	1	6	51.7	1472	-	-
3	1	6	51.9	1917	-	-
4	3	6	83.9	1130	1323	1518
5	2	6	71.8	1284	1515	-
6	1	6	65.1	1068	-	-
7	3	6	94.4	1173	1019	1934
8	2	6	67.4	1624	1866	-
9	2	6	71.8	1209	1288	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	14	99.2	1814	1640	1794
2	2	14	69.4	1316	1641	-
3	3	14	97.7	1675	1548	1344
4	3	14	96.1	1075	1407	1413
5	2	14	78.1	1728	1052	-
6	2	14	75.7	1492	1162	-
7	3	14	88.1	1205	1529	1508
8	2	14	76.9	1584	1558	-
9	2	14	82.3	1616	1438	-
10	2	14	75.2	1074	1680	-
11	1	14	64	1566	-	-
12	1	14	50.5	1085	-	-
13	3	14	98.6	1123	1090	1509
14	3	14	85.9	1719	1845	1949
15	1	14	56.1	1726	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	92.1	1098	1308	1459
2	2	19	67	1927	1877	-
3	2	19	68.8	1126	1468	-
4	2	19	77.5	1609	1286	-
5	2	19	82.5	1091	1083	-
6	2	19	67.8	1163	1523	-
7	2	19	82.9	1650	1843	-
8	1	19	50.8	1643	-	-
9	3	19	91.5	1405	1469	1739
10	2	19	74.2	1933	1366	-
11	1	19	62.3	1352	-	-
12	2	19	79.1	1944	1119	-
13	3	19	94.6	1034	1357	1554
14	2	19	81.9	1227	1839	-
15	1	19	65.2	1592	-	-
16	3	19	99.5	1418	1636	1533
17	2	19	80.9	1881	1786	-
18	3	19	93.1	1818	1998	1736
19	1	19	55.9	1936	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.91MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	58	1004	-	-
2	2	12	70.3	1393	1504	-
3	1	12	63.9	1586	-	-
4	3	12	98.9	1822	1727	1986
5	3	12	84.2	1623	1382	1419
6	3	12	90.6	1096	1745	1987
7	1	12	66.1	1669	-	-
8	3	12	88.5	1820	1811	1590
9	1	12	64.5	1834	-	-
10	3	12	84.8	1036	1466	1027
11	1	12	65.1	1536	-	-
12	3	12	85.6	1620	1347	1397
13	2	12	69.3	1951	1772	-
14	1	12	65.8	1693	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5498.31MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	95.9	1905	1890	1037
2	3	18	91.9	1724	1615	1081
3	1	18	54.7	1912	-	-
4	3	18	96.3	1169	1073	1805
5	2	18	66.9	1482	1550	-
6	3	18	84.9	1356	1953	1450
7	1	18	53.9	1157	-	-
8	1	18	66.2	1720	-	-
9	2	18	68.6	1530	1093	-
10	1	18	56.2	1296	-	-
11	2	18	71.9	1159	1021	-
12	1	18	65.8	1955	-	-
13	3	18	96.6	1394	1431	1422
14	3	18	93.5	1387	1104	1295
15	3	18	95.1	1907	1707	1748
16	2	18	67.1	1527	1594	-
17	2	18	75.8	1722	1665	-
18	2	18	83.1	1416	1455	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5493.91MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	57.5	1259	-	-
2	3	7	92.6	1516	1241	1129
3	2	7	77.9	1326	1684	-
4	3	7	85.9	1990	1968	1103
5	2	7	78.2	1614	1531	-
6	2	7	68.2	1332	1166	-
7	3	7	84.7	1985	1124	1502
8	3	7	86.9	1251	1118	1882
9	1	7	66.4	1959	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5494.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	79.3	1439	1557	-
2	2	9	68.3	1809	1924	-
3	1	9	66	1291	-	-
4	2	9	76.3	1782	1475	-
5	3	9	88.6	1491	1887	1790
6	3	9	93	1408	1055	1206
7	1	9	63.2	1437	-	-
8	3	9	98.8	1926	1403	1399
9	3	9	90.1	1202	1517	1686
10	1	9	60.4	1220	-	-
11	1	9	53.1	1543	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5497.11MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	15	64	1919	-	-
2	1	15	58.2	1321	-	-
3	1	15	51.9	1945	-	-
4	3	15	91.8	1287	1025	1428
5	1	15	51.6	1456	-	-
6	1	15	57.7	1904	-	-
7	2	15	76.9	1330	1002	-
8	2	15	68.3	1633	1406	-
9	3	15	94	1141	1801	1138
10	2	15	72.7	1261	1520	-
11	3	15	93.5	1185	1574	1354
12	3	15	97.5	1591	1112	1528
13	1	15	59	1172	-	-
14	2	15	82	1228	1196	-
15	2	15	78.1	1553	1506	-
16	2	15	76.7	1320	1143	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5497.11MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	88	1009	1911	1734
2	1	15	60	1444	-	-
3	1	15	63.6	1902	-	-
4	3	15	86.6	1916	1223	1488
5	1	15	61.6	1889	-	-
6	2	15	80	1573	1167	-
7	2	15	68.5	1938	1692	-
8	2	15	74.7	1265	1219	-
9	3	15	97.9	1587	1213	1637
10	1	15	52.5	1701	-	-
11	2	15	79.9	1454	1807	-
12	2	15	83.3	1930	1142	-
13	2	15	72.9	1606	1939	-
14	3	15	83.4	1778	1731	1314
15	3	15	94.8	1260	1067	1535
16	1	15	54.9	1440	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5496.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	56.6	1147	-	-
2	2	14	72.6	1152	1601	-
3	2	14	69.1	1571	1803	-
4	3	14	99.4	1350	1146	1760
5	3	14	90.7	1064	1309	1896
6	3	14	86.1	1983	1816	1855
7	3	14	84.2	1370	1823	1646
8	2	14	70.4	1635	1854	-
9	3	14	91.3	1334	1136	1341
10	1	14	66.3	1360	-	-
11	3	14	93	1271	1057	1929
12	3	14	93.7	1906	1497	1479
13	3	14	85.8	1546	1015	1718
14	2	14	70.8	1001	1005	-
15	1	14	57	1685	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	94.3	1920	1954	1181
2	1	19	60.5	1922	-	-
3	1	19	66.2	1738	-	-
4	2	19	75.3	1595	1443	-
5	3	19	88.8	1777	1789	1150
6	2	19	76.4	1343	1420	-
7	2	19	73.9	1379	1982	-
8	3	19	91.5	1175	1221	1569
9	3	19	84	1238	1694	1306
10	3	19	89.7	1179	1628	1791
11	2	19	77.3	1967	1795	-
12	3	19	94	1696	1359	2000
13	3	19	99.2	1788	1596	1521
14	2	19	77.8	1086	1165	-
15	3	19	93.7	1753	1780	1192
16	3	19	95.5	1188	1853	1425
17	1	19	60.5	1434	-	-
18	2	19	77.9	1808	1698	-
19	3	19	88.5	1183	1773	1187

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 18
Chirp Center Frequency: 5497.91MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	90.8	1878	1465	1873
2	3	17	86.4	1648	1415	1135
3	1	17	62.9	1318	-	-
4	2	17	78.7	1282	1263	-
5	3	17	86.1	1273	1561	1501
6	1	17	51.8	1844	-	-
7	2	17	75.8	1442	1285	-
8	3	17	93.2	1541	1160	1383
9	3	17	95.3	1448	1642	1290
10	3	17	95.3	1678	1589	1526
11	3	17	87.1	1317	1723	1293
12	2	17	74.8	1240	1178	-
13	3	17	88.9	1806	1975	1935
14	2	17	77	1158	1932	-
15	3	17	95.6	1191	1512	1874
16	3	17	85.6	1830	1737	1089
17	2	17	72.8	1398	1761	-
18	1	17	56.6	1339	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 8
Chirp Center Frequency: 5566.89MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	58.1	1451	-	-
2	1	5	56	1771	-	-
3	2	5	78.6	1534	1372	-
4	2	5	82.8	1511	1869	-
5	2	5	81.1	1532	1266	-
6	3	5	85.2	1758	1137	1663
7	1	5	59.6	1249	-	-
8	1	5	63.3	1613	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5566.89MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.2	1711	1066	1483
2	3	5	85.1	1120	1108	1400
3	3	5	92.7	1862	1155	1305
4	3	5	97.7	1980	1301	1446
5	2	5	70.9	1007	1095	-
6	2	5	82.4	1787	1632	-
7	1	5	65.8	1871	-	-
8	3	5	97.3	1324	1476	1872

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5563.69MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	80.1	1452	1746	-
2	2	13	70.6	1827	1474	-
3	2	13	81.4	1325	1539	-
4	2	13	81.8	1898	1900	-
5	2	13	80.1	1248	1524	-
6	2	13	73.4	1092	1255	-
7	1	13	62.9	1579	-	-
8	2	13	83.2	1276	1351	-
9	2	13	78.6	1575	1950	-
10	3	13	96.2	1784	1494	1003
11	3	13	96.9	1610	1367	1274
12	1	13	64.9	1915	-	-
13	3	13	88.4	1503	1876	1087
14	2	13	66.9	1207	1315	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5566.09MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	53.5	1670	-	-
2	3	7	92.2	1893	1908	1164
3	2	7	70.8	1193	1828	-
4	3	7	88.8	1514	1634	1313
5	1	7	52.4	1229	-	-
6	2	7	71.9	1969	1038	-
7	1	7	59.9	1952	-	-
8	1	7	57.9	1101	-	-
9	1	7	55.2	1022	-	-
10	2	7	77.7	1149	1006	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5563.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	14	69.1	1525	1197	-
2	2	14	72.7	1976	1838	-
3	1	14	59.7	1849	-	-
4	3	14	90.8	1080	1913	1767
5	1	14	50.5	1972	-	-
6	3	14	97.7	1310	1867	1427
7	2	14	74.4	1910	1819	-
8	1	14	54.6	1277	-	-
9	1	14	59	1481	-	-
10	3	14	91.6	1023	1024	1079
11	3	14	97	1410	1914	1480
12	2	14	75	1781	1886	-
13	1	14	54.2	1505	-	-
14	3	14	91.1	1008	1363	1298
15	2	14	76.6	1567	1948	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5564.89MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	84.8	1556	1510	1182
2	3	10	93.1	1956	1458	1386
3	3	10	95.4	1388	1704	1826
4	1	10	54.2	1962	-	-
5	3	10	84.9	1812	1706	1362
6	3	10	88.3	1555	1031	1056
7	3	10	94.8	1852	1292	1652
8	2	10	74.9	1084	1752	-
9	2	10	75.3	1210	1328	-
10	2	10	81.5	1937	1349	-
11	1	10	50.4	1649	-	-
12	2	10	76.8	1338	1270	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5562.89MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	82.1	1076	1629	-
2	2	15	80	1230	1257	-
3	3	15	93.9	1994	1447	1690
4	3	15	87.4	1507	1645	1365
5	2	15	72.1	1768	1897	-
6	1	15	65.3	1747	-	-
7	1	15	53.7	1540	-	-
8	1	15	62.7	1423	-	-
9	1	15	57.4	1829	-	-
10	1	15	63.7	1113	-	-
11	2	15	72.2	1604	1122	-
12	2	15	82.7	1396	1860	-
13	2	15	81	1047	1232	-
14	2	15	71.8	1026	1785	-
15	3	15	92.3	1358	1695	1605
16	1	15	55.9	1417	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5565.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	9	96.9	1709	1687	1743
2	2	9	69.9	1252	1414	-
3	2	9	78.6	1647	1043	-
4	3	9	88	1180	1884	1283
5	2	9	79.8	1656	1061	-
6	1	9	62.2	1662	-	-
7	2	9	67.7	1224	1199	-
8	2	9	78.9	1655	1250	-
9	1	9	64.6	1214	-	-
10	1	9	53.7	1380	-	-
11	2	9	70.4	1401	1364	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5566.89MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	89.4	1170	1109	1565
2	2	5	74.3	1243	1059	-
3	3	5	97.8	1697	1946	1712
4	3	5	84.5	1800	1688	1245
5	1	5	59.2	1689	-	-
6	1	5	50.1	1477	-	-
7	2	5	70.8	1840	1942	-
8	3	5	92.4	1174	1028	1094

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5564.89MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	74.6	1792	1593	-
2	1	10	65.1	1117	-	-
3	1	10	54.2	1538	-	-
4	2	10	74.9	1716	1999	-
5	1	10	59.6	1627	-	-
6	1	10	50.5	1337	-	-
7	2	10	78.3	1239	1562	-
8	2	10	69.1	1903	1190	-
9	2	10	71	1965	1717	-
10	2	10	70.9	1226	1762	-
11	1	10	62.7	1345	-	-
12	2	10	73.2	1770	1493	-

802.11be (EHT160) 5250MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_11
Number of Bursts in Trial: 17
Chirp Center Frequency: 5256.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5257.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5255.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5257.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5254.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5254.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5322.31MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5324.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5320.31MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 14
Chirp Center Frequency: 5323.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 13
Chirp Center Frequency: 5323.91MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5326.31MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5321.91MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5320.71MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5324.31MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5321.51MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT160) 5570MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5496.69MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5497.89MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5495.49MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5497.49MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.09MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.09MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.29MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5641.01MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5643.41MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5639.01MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5642.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5642.61MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5645.01MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5640.61MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_28
Number of Bursts in Trial: 19
Chirp Center Frequency: 5639.41MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 12
Chirp Center Frequency: 5643.01MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5640.21MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

802.11be (EHT240) 5610MHz

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_01
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	13	77.8	1665	1477	-
2	1	13	51.9	1074	-	-
3	1	13	63.8	1584	-	-
4	3	13	96.6	1682	1786	1843
5	3	13	85.9	1795	1215	1729
6	2	13	73.7	1198	1549	-
7	2	13	77.2	1837	1819	-
8	2	13	68.4	1587	1114	-
9	2	13	76.7	2000	1155	-
10	1	13	53.2	1147	-	-
11	3	13	85.7	1433	1695	1394
12	3	13	94.3	1670	1426	1935
13	2	13	77.6	1294	1671	-
14	1	13	65.7	1512	-	-
15	3	13	93.5	1444	1130	1468

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	75	1880	1527	-
2	3	5	99.4	1401	1262	1257
3	2	5	67.4	1531	1403	-
4	2	5	73.6	1449	1041	-
5	1	5	65.9	1432	-	-
6	3	5	83.8	1356	1292	1419
7	1	5	65.5	1543	-	-
8	3	5	98.6	1548	1796	1728

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 11
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	73.8	1806	1538	-
2	2	9	69.5	1117	1649	-
3	1	9	51.9	1651	-	-
4	3	9	84.6	1976	1032	1271
5	3	9	95.4	1060	1903	1388
6	2	9	68	1368	1351	-
7	3	9	89.6	1338	1514	1573
8	2	9	81.9	1022	1689	-
9	3	9	88.3	1810	1330	1838
10	1	9	53.7	1597	-	-
11	3	9	91.3	1961	1106	1001

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	19	68.1	1339	1355	-
2	1	19	58.7	1251	-	-
3	2	19	75.3	1136	1640	-
4	1	19	56.4	1753	-	-
5	3	19	99.7	1196	1708	1159
6	1	19	57.7	1013	-	-
7	1	19	59.5	1072	-	-
8	2	19	80	1482	1369	-
9	2	19	82	1993	1197	-
10	2	19	82.8	1883	1005	-
11	3	19	88	1061	1928	1101
12	3	19	93.2	1207	1907	1223
13	2	19	70.4	1526	1360	-
14	3	19	95.3	1171	1955	1775
15	2	19	81.9	1690	1545	-
16	3	19	98.5	1975	1169	1062
17	1	19	65	1767	-	-
18	3	19	85.4	1011	1637	1425
19	3	19	91.6	1878	1445	1325
20	2	19	67.3	1091	1218	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 17
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	67.9	1320	1133	-
2	1	16	62.3	1957	-	-
3	1	16	53.3	1592	-	-
4	3	16	90	1900	1153	1346
5	2	16	77.1	1166	1646	-
6	3	16	83.9	1278	1232	1459
7	3	16	89.1	1240	1384	1939
8	2	16	81.8	1833	1676	-
9	1	16	50.3	1075	-	-
10	3	16	87.1	1116	1996	1756
11	2	16	71.3	1225	1815	-
12	3	16	97.5	1884	1465	1132
13	3	16	90.6	1561	1040	1354
14	3	16	86.3	1596	1183	1792
15	3	16	97.6	1365	1073	1361
16	3	16	84.7	1021	1718	1854
17	3	16	99.7	1150	1244	1988

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	12	92.9	1085	1564	1407
2	2	12	67.7	1744	1747	-
3	1	12	65.8	1092	-	-
4	1	12	56.3	1851	-	-
5	1	12	53.7	1727	-	-
6	3	12	83.5	1679	1930	1025
7	1	12	65.8	1519	-	-
8	3	12	85.9	1134	1034	1808
9	2	12	76.3	1606	1926	-
10	2	12	81.5	1891	1714	-
11	3	12	89.4	1310	1594	1827
12	1	12	63.4	1568	-	-
13	2	12	69.6	1307	1925	-
14	2	12	74.5	1264	1846	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	96.6	1182	1609	1581
2	3	13	96.7	1829	1799	1154
3	3	13	86.5	1923	1396	1865
4	2	13	73.3	1908	1318	-
5	1	13	55.8	1688	-	-
6	1	13	55.4	1145	-	-
7	3	13	85.3	1336	1504	1820
8	2	13	79.4	1344	1893	-
9	1	13	65.7	1476	-	-
10	2	13	68.6	1008	1028	-
11	2	13	77.7	1972	1835	-
12	2	13	79.6	1882	1331	-
13	3	13	94.9	1830	1070	1349
14	1	13	61.4	1451	-	-
15	3	13	90.6	1233	1562	1887

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	52.6	1210	-	-
2	3	10	84.1	1314	1725	1529
3	3	10	97.7	1139	1868	1805
4	3	10	97.3	1341	1446	1755
5	3	10	98.8	1544	1386	1302
6	2	10	72.2	1771	1184	-
7	2	10	67.6	1175	1027	-
8	2	10	75.7	1026	1871	-
9	1	10	60.9	1798	-	-
10	1	10	64.2	1138	-	-
11	2	10	78.8	1784	1604	-
12	3	10	87.5	1511	1712	1683

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	54.1	1415	-	-
2	1	13	50.7	1221	-	-
3	1	13	52.3	1974	-	-
4	3	13	99.8	1558	1696	1949
5	2	13	68.4	1014	1099	-
6	2	13	80.8	1736	1505	-
7	1	13	62.5	1778	-	-
8	2	13	74.8	1149	1204	-
9	1	13	50.8	1049	-	-
10	1	13	54	1417	-	-
11	1	13	63	1730	-	-
12	3	13	91.8	1143	1270	1347
13	2	13	79.3	1274	1992	-
14	1	13	64.3	1937	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.4	1043	-	-
2	1	6	52	1863	-	-
3	3	6	97.2	1973	1605	1583
4	2	6	78.7	1466	1743	-
5	2	6	74.2	1280	1219	-
6	3	6	88.7	1293	1934	1273
7	1	6	54.3	1991	-	-
8	3	6	95.4	1580	1555	1791

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_11

Number of Bursts in Trial: 17

Chirp Center Frequency: 5496.72MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	73.7	1208	1497	-
2	3	16	97.4	1942	1754	1613
3	3	16	91.7	1999	1702	1462
4	1	16	66.2	1393	-	-
5	2	16	70.8	1968	1821	-
6	1	16	52.3	1740	-	-
7	2	16	78.9	1308	1984	-
8	2	16	70.9	1050	1358	-
9	2	16	75.6	1437	1430	-
10	1	16	59.1	1697	-	-
11	2	16	77	1397	1304	-
12	2	16	67.9	1803	1083	-
13	2	16	81.2	1720	1932	-
14	2	16	78.7	1247	1121	-
15	1	16	63.3	1634	-	-
16	2	16	68.9	1849	1423	-
17	1	16	59.3	1093	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_12
Number of Bursts in Trial: 19
Chirp Center Frequency: 5497.92MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	98.9	1381	1680	1488
2	2	19	82.3	1716	1855	-
3	3	19	86.7	1211	1400	1919
4	3	19	89.7	1861	1068	1282
5	3	19	98.6	1507	1194	1461
6	2	19	71.1	1921	1789	-
7	1	19	55.9	1947	-	-
8	2	19	67.9	1350	1372	-
9	3	19	84.4	1203	1107	1443
10	1	19	58.8	1715	-	-
11	1	19	65.6	1017	-	-
12	2	19	78.5	1911	1704	-
13	2	19	82.3	1845	1686	-
14	3	19	90.1	1938	1071	1266
15	3	19	90.2	1989	1089	1950
16	2	19	83.1	1943	1406	-
17	1	19	58.8	1742	-	-
18	2	19	77	1187	1657	-
19	1	19	55	1012	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 15
Chirp Center Frequency: 5495.52MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	58.1	1929	-	-
2	1	13	52.1	1910	-	-
3	1	13	59.9	1971	-	-
4	1	13	60.2	1812	-	-
5	3	13	95.9	1399	1906	1608
6	2	13	79.9	1626	1859	-
7	2	13	78.5	1238	1917	-
8	1	13	53.8	1763	-	-
9	1	13	64.7	1800	-	-
10	1	13	61.4	1390	-	-
11	2	13	83.2	1692	1858	-
12	3	13	84.7	1533	1677	1638
13	3	13	88.7	1703	1528	1058
14	2	13	78.3	1258	1951	-
15	2	13	69.3	1731	1717	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.32MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	10	75.3	1994	1612	-
2	1	10	56.3	1456	-	-
3	2	10	67.7	1617	1185	-
4	1	10	55.6	1337	-	-
5	2	10	75.2	1421	1267	-
6	2	10	76.3	1359	1305	-
7	3	10	85.7	1547	1362	1924
8	3	10	98.4	1873	1550	1249
9	3	10	86.4	1779	1439	1046
10	3	10	93.6	1059	1031	1452
11	1	10	63.3	1328	-	-
12	3	10	92.4	1412	1673	1322

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5497.52MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	18	93.3	1983	1912	1535
2	2	18	69.1	1102	1794	-
3	3	18	86.9	1044	1152	1148
4	3	18	84.9	1894	1948	1118
5	2	18	72.3	1094	1916	-
6	1	18	51.7	1447	-	-
7	1	18	58.3	1429	-	-
8	1	18	60.8	1979	-	-
9	1	18	57.1	1641	-	-
10	3	18	88.9	1886	1964	1489
11	2	18	72	1909	1297	-
12	3	18	90.9	1261	1566	1370
13	1	18	59.8	1552	-	-
14	2	18	70	1759	1291	-
15	2	18	67.2	1625	1881	-
16	3	18	91.2	1382	1832	1661
17	1	18	56.5	1483	-	-
18	1	18	51.2	1237	-	-
19	2	18	74.1	1471	1245	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.12MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	76.9	1110	1140	-
2	1	12	50.2	1316	-	-
3	1	12	62.9	1520	-	-
4	1	12	64.7	1902	-	-
5	3	12	83.8	1410	1097	1621
6	1	12	65.4	1944	-	-
7	1	12	53.2	1024	-	-
8	1	12	51.7	1603	-	-
9	2	12	78.7	1804	1168	-
10	2	12	72.4	1030	1343	-
11	1	12	53.8	1327	-	-
12	2	12	73.6	1524	1553	-
13	2	12	66.7	1722	1122	-
14	2	12	82.5	1404	1019	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498.32MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	87.6	1565	1055	1840
2	3	20	85.2	1735	1541	1408
3	3	20	84.8	1534	1889	1463
4	2	20	77.9	1749	1460	-
5	2	20	76.5	1518	1485	-
6	1	20	60.9	1540	-	-
7	2	20	83	1080	1010	-
8	2	20	80.4	1824	1752	-
9	2	20	67.5	1764	1181	-
10	1	20	62.1	1495	-	-
11	3	20	86.4	1773	1966	1263
12	3	20	84.3	1593	1188	1788
13	2	20	76.9	1226	1537	-
14	3	20	95.8	1192	1298	1844
15	1	20	55.2	1644	-	-
16	1	20	59	1402	-	-
17	3	20	94.5	1296	1700	1283
18	3	20	91.9	1970	1978	1165
19	3	20	85.2	1732	1551	1189
20	2	20	69.5	1038	1224	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.32MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	86.4	1259	1918	1455
2	3	10	92.2	1598	1719	1895
3	2	10	80.4	1816	1899	-
4	1	10	54.3	1335	-	-
5	1	10	53.1	1303	-	-
6	2	10	69.4	1503	1546	-
7	2	10	69.1	1279	1639	-
8	3	10	100	1375	1438	1595
9	2	10	79.6	1239	1705	-
10	3	10	88.4	1374	1579	1623
11	1	10	53.3	1016	-	-
12	1	10	65.3	1709	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5495.12MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	55.3	1920	-	-
2	1	12	58.3	1797	-	-
3	2	12	72.3	1610	1039	-
4	3	12	84.8	1131	1761	1721
5	2	12	82.5	1875	1431	-
6	1	12	63.3	1095	-	-
7	2	12	80	1119	1913	-
8	3	12	90.3	1660	1853	1123
9	3	12	91.1	1539	1783	1172
10	3	12	96.6	1525	1036	1385
11	2	12	82.7	1710	1990	-
12	1	12	50.7	1234	-	-
13	2	12	78.4	1047	1109	-
14	3	12	99.5	1299	1965	1869

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494.32MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	88.6	1501	1067	1927
2	1	10	57.4	1723	-	-
3	3	10	96.6	1086	1658	1324
4	2	10	69.7	1751	1945	-
5	2	10	77.9	1642	1317	-
6	1	10	62	1866	-	-
7	3	10	88.4	1997	1077	1366
8	3	10	97.3	1790	1896	1367
9	3	10	96.2	1391	1787	1672
10	3	10	95.4	1020	1892	1414
11	1	10	54.8	1084	-	-
12	2	10	80.4	1850	1436	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5718.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	74.7	1619	1611	-
2	1	15	57.1	1560	-	-
3	3	15	91.9	1392	1475	1276
4	2	15	83.1	1809	1772	-
5	1	15	50.7	1003	-	-
6	2	15	79.2	1574	1600	-
7	1	15	58.7	1186	-	-
8	2	15	71	1521	1567	-
9	2	15	79	1777	1960	-
10	2	15	68.5	1284	1428	-
11	2	15	73.5	1904	1352	-
12	2	15	70.5	1864	1115	-
13	2	15	76.6	1045	1300	-
14	2	15	81.2	1160	1675	-
15	1	15	61.8	1277	-	-
16	3	15	94.9	1450	1206	1860

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5721.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	9	78.5	1653	1698	-
2	3	9	89.8	1174	1962	1167
3	1	9	59.4	1982	-	-
4	2	9	79.6	1633	1890	-
5	2	9	76	1112	1811	-
6	1	9	53.6	1144	-	-
7	2	9	80.9	1220	1053	-
8	1	9	61.6	1724	-	-
9	1	9	53.4	1901	-	-
10	1	9	59.9	1379	-	-
11	1	9	60.4	1453	-	-
12	3	9	91.4	1768	1726	1227

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5716.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	77	1191	1363	-
2	1	20	58.1	1248	-	-
3	1	20	62.1	1836	-	-
4	2	20	76.9	1334	1236	-
5	2	20	80	1914	1852	-
6	1	20	52	1701	-	-
7	3	20	88.6	1693	1995	1905
8	2	20	72.9	1922	1387	-
9	3	20	98.5	1839	1746	1389
10	1	20	57.9	1193	-	-
11	3	20	95.9	1659	1870	1066
12	1	20	53.5	1162	-	-
13	3	20	92	1745	1654	1458
14	1	20	57.3	1834	-	-
15	2	20	70.5	1684	1586	-
16	2	20	70	1042	1664	-
17	3	20	84	1765	1630	1176
18	2	20	76.1	1557	1057	-
19	3	20	93.2	1985	1018	1340
20	3	20	96.8	1760	1614	1817

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5719.82MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	50.1	1841	-	-
2	3	12	93.5	1590	1081	1413
3	2	12	68.8	1707	1577	-
4	1	12	56.3	1056	-	-
5	3	12	86	1953	1108	1987
6	2	12	75.2	1572	1536	-
7	1	12	54.4	1517	-	-
8	2	12	71.1	1329	1243	-
9	2	12	76.2	1940	1770	-
10	2	12	80.2	1098	1209	-
11	2	12	79.7	1588	1214	-
12	3	12	90.9	1615	1862	1601
13	2	12	68.7	1377	1441	-
14	2	12	67.4	1872	1313	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5720.22MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94	1643	1748	1941
2	2	11	70.8	1177	1201	-
3	1	11	56.3	1006	-	-
4	3	11	96.7	1230	1163	1332
5	3	11	90.6	1217	1582	1498
6	2	11	74.5	1569	1281	-
7	3	11	92.6	1065	1669	1222
8	3	11	89	1493	1135	1380
9	3	11	96.5	1607	1822	1602
10	2	11	70.5	1141	1178	-
11	3	11	94	1009	1629	1956
12	1	11	55.8	1290	-	-
13	3	11	87.7	1435	1963	1164

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_26
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5722.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	68.6	1306	1161	-
2	2	5	83.1	1420	1315	-
3	1	5	60.9	1687	-	-
4	2	5	77.7	1776	1158	-
5	2	5	77.4	1793	1510	-
6	2	5	66.8	1576	1323	-
7	1	5	63.7	1333	-	-
8	3	5	91.2	1409	1681	1275

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5718.22MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	16	83.6	1632	1195	1000
2	3	16	89.4	1173	1627	1656
3	1	16	55.8	1532	-	-
4	3	16	90.9	1981	1554	1998
5	1	16	54.7	1825	-	-
6	3	16	97.7	1734	1202	1250
7	2	16	67.5	1571	1434	-
8	3	16	96.7	1589	1469	1268
9	2	16	68.3	1750	1954	-
10	2	16	78.3	1591	1082	-
11	1	16	55	1427	-	-
12	3	16	84.9	1129	1936	1199
13	2	16	74.6	1959	1856	-
14	1	16	63.3	1885	-	-
15	3	16	99.8	1035	1515	1120
16	1	16	63.6	1647	-	-
17	3	16	87.3	1931	1051	1831

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5717.02MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	19	85.6	1946	1078	1015
2	2	19	68.6	1029	1780	-
3	1	19	54.2	1111	-	-
4	1	19	61.2	1104	-	-
5	3	19	97.1	1157	1969	1100
6	3	19	98.3	1142	1699	1622
7	1	19	62.4	1655	-	-
8	2	19	80.2	1126	1769	-
9	3	19	87.5	1216	1448	1179
10	3	19	85.8	1847	1348	1472
11	3	19	88.1	1023	1124	1631
12	1	19	65.3	1848	-	-
13	1	19	52.5	1470	-	-
14	1	19	52.3	1312	-	-
15	2	19	74.1	1915	1200	-
16	1	19	54.9	1479	-	-
17	2	19	76.2	1376	1502	-
18	1	19	60.4	1758	-	-
19	2	19	81.5	1491	1103	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5720.62MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	10	50.5	1857	-	-
2	1	10	55.7	1246	-	-
3	3	10	85.8	1774	1002	1967
4	2	10	76.9	1125	1474	-
5	2	10	75.1	1254	1052	-
6	3	10	92.3	1180	1486	1492
7	2	10	78.1	1301	1757	-
8	3	10	92.2	1898	1252	1713
9	3	10	89	1260	1706	1411
10	2	10	70.9	1578	1620	-
11	1	10	63.1	1782	-	-
12	1	10	55.3	1522	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 18
Chirp Center Frequency: 5717.82MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	83.4	1454	1205	1801
2	3	17	97.3	1319	1826	1635
3	3	17	90.4	1079	1986	1674
4	3	17	91.8	1563	1151	1802
5	3	17	98.2	1876	1977	1766
6	1	17	59.5	1952	-	-
7	2	17	80	1253	1137	-
8	3	17	86.5	1054	1128	1828
9	3	17	91.1	1105	1599	1442
10	3	17	93.5	1867	1373	1087
11	1	17	60.7	1033	-	-
12	2	17	67.2	1288	1405	-
13	1	17	61.8	1585	-	-
14	2	17	79.4	1933	1667	-
15	2	17	81.4	1096	1464	-
16	1	17	65.7	1496	-	-
17	2	17	76	1733	1255	-
18	2	17	81	1326	1668	-

--- END ---