FCC RADIO TEST REPORT

FCC ID	:	**PY7-75158T**
Equipment	:	**GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac/ax, NFC and GNSS**
Brand Name	:	**Sony**
Applicant	:	**Sony Corporation 1-7-1 Konan, Minato-ku , Tokyo, Japan 108-0075**
Manufacturer	:	**Sony Corporation 1-7-1 Konan, Minato-ku , Tokyo, Japan 108-0075**
Standard	:	**FCC Part 15 Subpart E §15.407**

The product was received on Feb. 03, 2026 and testing was performed from Mar. 05, 2026 to May 01, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

Table of Contents

History of this test report **3**
Summary of Test Result **4**
1 General Description **5**
1.1 Product Feature of Equipment Under Test 5
1.2 Modification of EUT 7
1.3 Testing Location 7
1.4 Applicable Standards 7
2 Test Configuration of Equipment Under Test **8**
2.1 Carrier Frequency and Channel 8
2.2 Test Mode 9
2.3 Connection Diagram of Test System 10
2.4 Support Unit used in test configuration and system 10
2.5 EUT Operation Test Setup 10
2.6 Measurement Results Explanation Example 11
3 Test Result **12**
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 12
3.2 Maximum Conducted Output Power Measurement 13
3.3 Power Spectral Density Measurement 14
3.4 Unwanted Emissions Measurement 16
3.5 AC Conducted Emission Measurement 20
3.6 Antenna Requirements 22
4 List of Measuring Equipment **23**
5 Measurement Uncertainty **25**
Appendix A. Conducted Test Results
Appendix B. AC Conducted Emission Test Result
Appendix C. Radiated Spurious Emission Test Result
Appendix D. Duty Cycle Plots

History of this test report

Report No.	Version	Description	Issue Date
FR620304F	01	Initial issue of report	Jun. 22, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	14.90 dB under the limit at 5944.38 MHz
3.5	15.207	AC Conducted Emission	Pass	5.78 dB under the limit at 1.05 MHz
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Vina Su

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC and BDS/Galileo/GLONASS/GPS.
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth:PIFA Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna NFC : LOOP Antenna

Antenna information		
5725 MHz ~ 5850 MHz	Peak Gain (dBi)	Ant. 6: -0.4 Ant. 7: 0.8

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List			
HW Version	**SW Version**	**S/N**	**Performed Test Item**
A	0.27	SEABBAG0AWE0004B	RF conducted measurement
		SEABBAG0AWE00018	Radiated Spurious Emission
		SEABBAG0AWE0000A	AC Conducted Emission

Specification of Accessory		
AC Adapter	**Brand Name**	Sony
	Model Name	XQZ-UC1
Earphone	**Brand Name**	Sony
	Model Name	MDR-EX15AP
USB Cable 1	**Brand Name**	Sony
	Model Name	XQZ-UB1
USB Cable 2	**Brand Name**	Sony
	Model Name	UCB20

Remark:

1. MIMO Ant. 6+7 Directional Gain is a calculated result from MIMO Ant. 6 and MIMO Ant. 7. The formula used in calculation is documented in section 1.1.1.
2. Power of MIMO Ant. 6 + Ant. 7 is a calculated result from sum of the power MIMO Ant. 6 and MIMO Ant. 7.
3. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.1.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the kth antenna is being fed by spatial stream j, or zero if it is not;

G_k is the gain in dBi of the kth antenna.

As minimum N_{SS}=1 is supported by EUT, the formula can be simplified as:

Directional gain = $10*\log[(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}]$ dBi

Where G1, G2….GN denote single antenna gain.

The directional gain "DG" is calculated as following table.

	Ant 6 (dBi)	Ant 7 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band IV	-0.40	0.80	0.80	3.23	0.00	0.00

Calculation example:

If a device has two antenna, G_{ANT5}= -0.4 dBi; G_{ANT8}= 0.8 dBi

Directional gain of power measurement = max(-0.4, 0.8) + 0 = 0.8 dBi

Directional gain of PSD derived from formula which is

10 x log { { [10^ (-0.4 dBi / 20) + 10^ (0.8 dBi / 20)] ^ 2 } / 2 } = 3.23 dBi

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 1190 and 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW1190 and TW3786

Note:

1. The test site complies with ANSI C63.4 2014 requirement.
2. The Radiated Spurious Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory. (TAF Code: 1190)

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 414788 D01 Radiated Test Site v01r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- FCC Part 15 Subpart E
- ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80

2.2 Test Mode

This device support 26/52/106/242/484/996

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11n mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Remark: The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.

Test Cases	
AC Conducted Emission	Mode 1: BT Link + WLAN5G Link + MPEG 4 + USB Cable + Adapter + Earphone
Remark: **1.** The detailed Radiated test modes are shown in Appendix C. **2.** For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

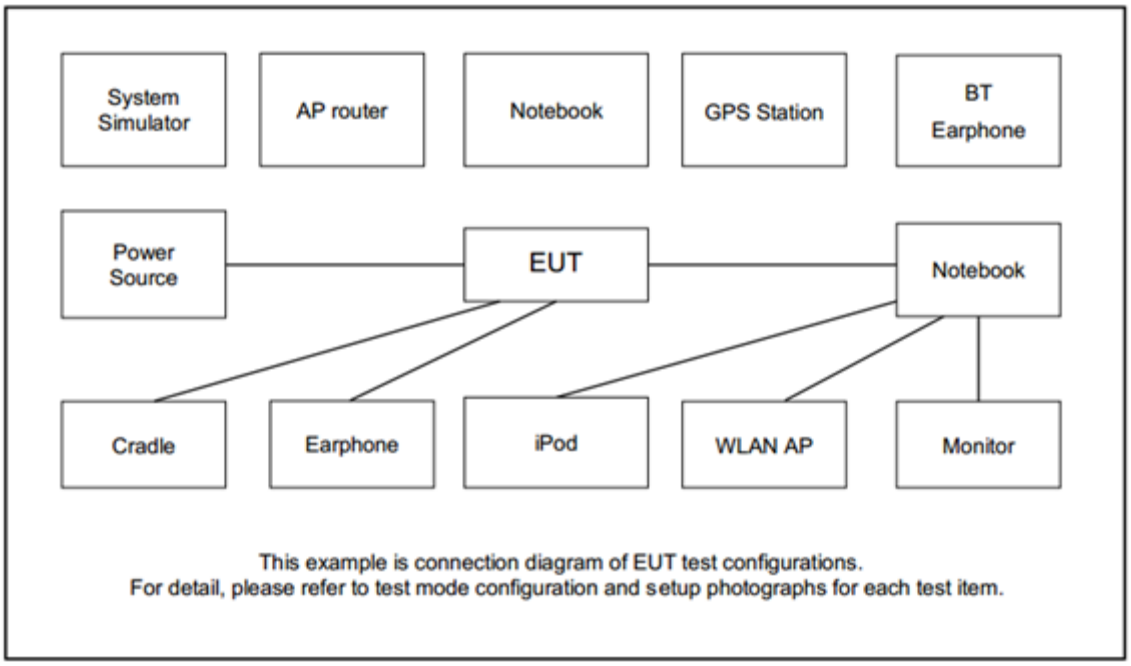

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	SonyErricsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,1.8m
3.	Earphone	Sony	MDR-EX15AP	N/A	Unshielded, 1.2m	N/A
4.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P：Unshielded, 1.2m DC O/P：Shielded, 1.8m

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT Version 4.0.181.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85 GHz
2. Set RBW = 100 kHz.
3. Set the VBW ≥ 3 x RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup

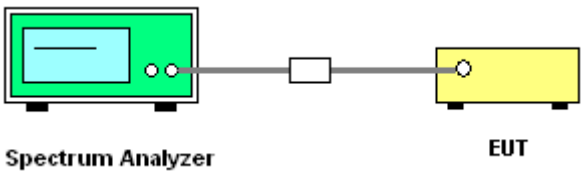

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

3.2.4 Test Setup

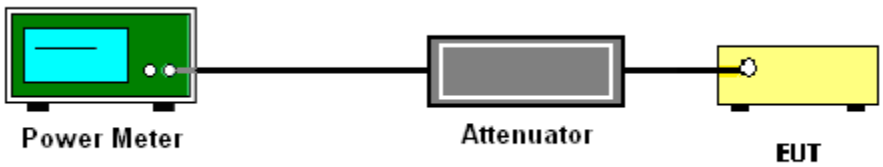

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

 # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500kHz.
- Set VBW ≥ 3 MHz.
- Number of points in sweep ≥ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add 10 log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add 10 log(1/0.25) = 6 dB if the duty cycle is 25 percent.

1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
   Method (c): Measure and add 10 log(N_{ANT}) dB.
   With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity 10 log(N_{ANT}) dB is added to each spectrum value before comparing to the emission limit. The addition of 10 log(N_{ANT}) dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}$ th of the PSD limit.

3.3.4 Test Setup

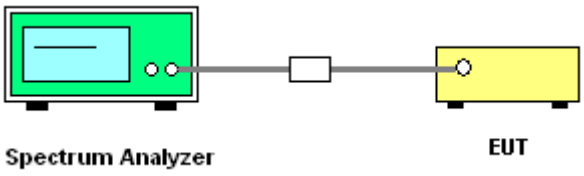

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E=\frac{1000000\sqrt{30P}}{3}$$ μV/m, where P is the eirp (Watts)

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

   (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
   - RBW = 120 kHz
   - VBW = 300 kHz
   - Detector = Peak
   - Trace mode = max hold

   (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
   - RBW = 1 MHz
   - VBW ≥ 3 MHz
   - Detector = Peak
   - Sweep time = auto
   - Trace mode = max hold

   (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
   - RBW = 1 MHz
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading.

   When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies.

   When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.

3.4.4 Test Setup

For radiated emissions below 30MHz

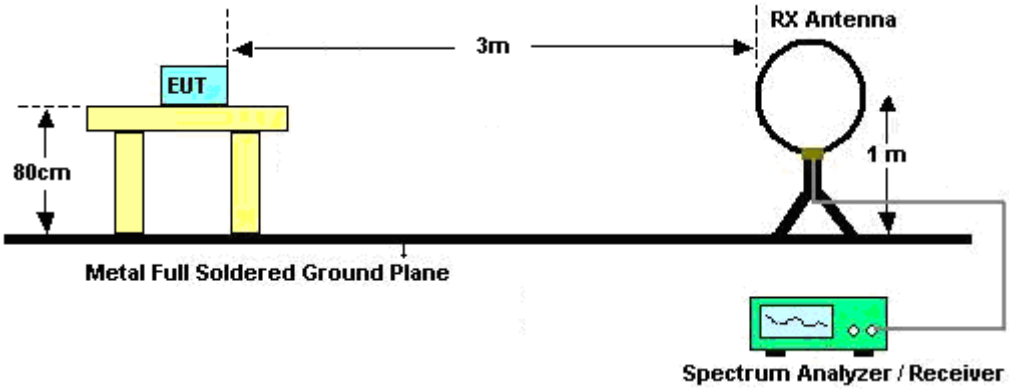

For radiated emissions from 30MHz to 1GHz

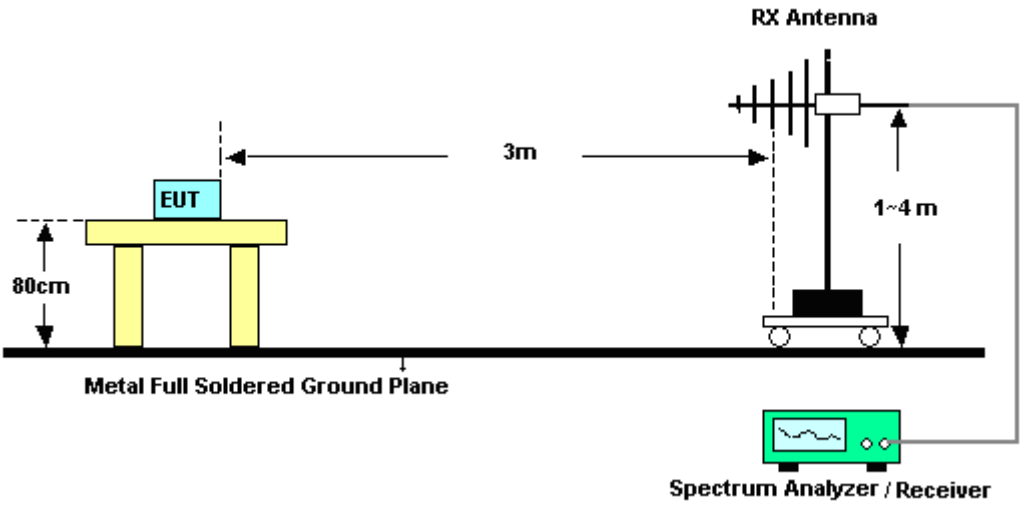

For radiated test from 1GHz to 18GHz

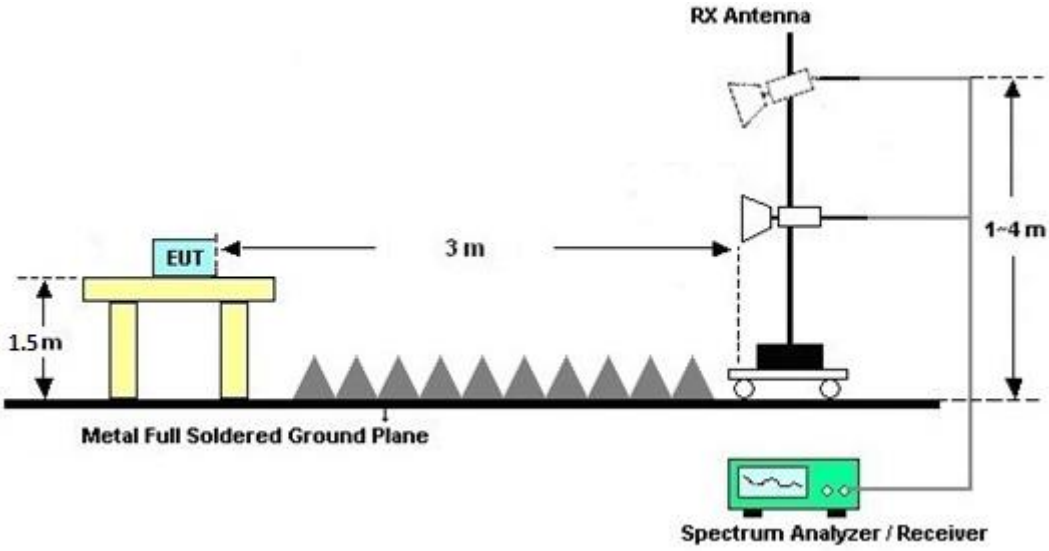

For radiated test above 18GHz

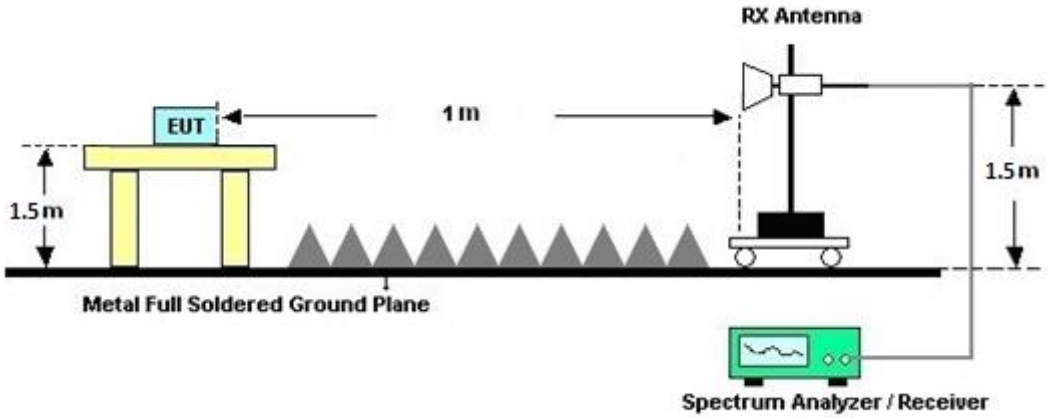

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site **v01r01**, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

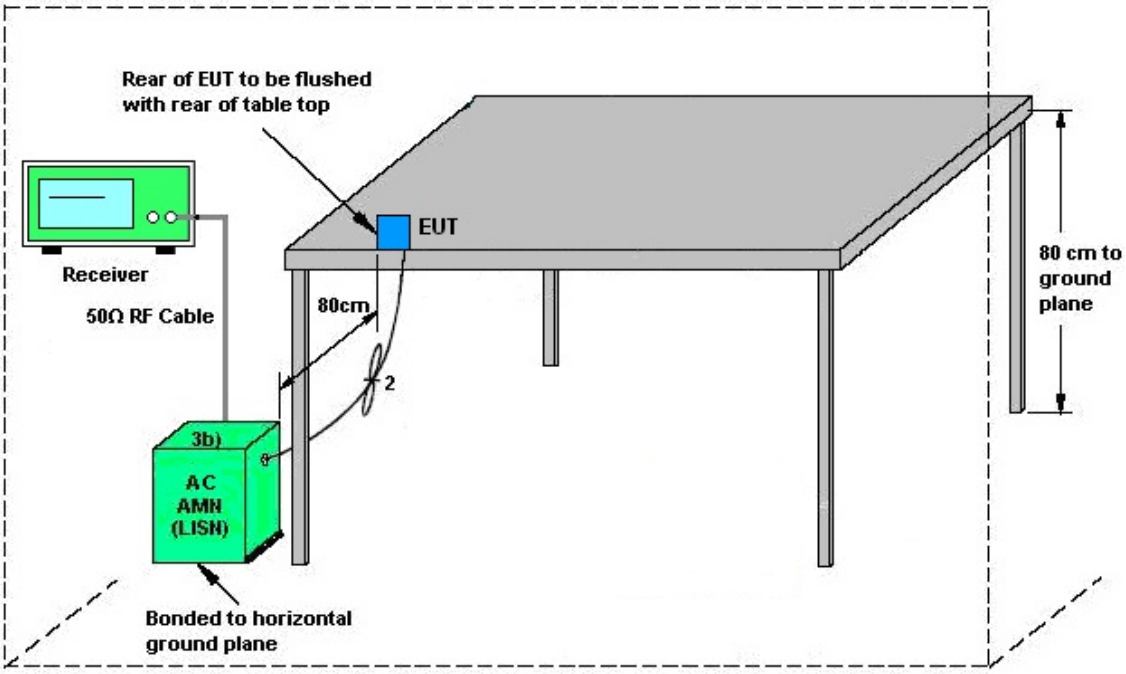

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Antenna permanently attached.

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Mar. 17. 2026~ May. 01. 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Mar. 17. 2026~ May. 01. 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Nov. 12, 2025	Mar. 17. 2026~ May. 01. 2026	Nov. 11, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	Mar. 17. 2026~ May. 01. 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Mar. 17. 2026~ May. 01. 2026	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 05, 2026	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 05, 2026	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Mar. 05, 2026	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 02, 2026	Mar. 05, 2026	Mar. 01, 2027	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Mar. 05, 2026	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2025	Mar. 05, 2026	Oct. 20, 2026	Conduction (CO07-HY)

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	35419 & 03	30MHz~1GHz	Mar. 21,2026	Mar. 23, 2026 ~ Apr. 30, 2026	Mar. 20,2027	Radiation (03CH07-HY)
Double Ridged Guide Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Dec. 09,2025	Mar. 23, 2026 ~ Apr. 30, 2026	Dec. 08,2026	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 16,2026	Mar. 23, 2026 ~ Apr. 30, 2026	Mar. 15,2027	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101800-30-10P	1590075	1GHz~18GHz	Apr. 18,2025	Mar. 23, 2026 ~ Apr. 16, 2026	Apr. 17,2026	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101800-30-10P	1590075	1GHz~18GHz	Apr. 17,2026	Apr. 18, 2026 ~ Apr. 30, 2026	Apr. 16,2027	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Sep. 30,2025	Mar. 23, 2026 ~ Apr. 30, 2026	Sep. 29,2026	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Mar. 21,2026	Mar. 23, 2026 ~ Apr. 30, 2026	Mar. 20,2027	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Aug. 08,2025	Mar. 23, 2026 ~ Apr. 30, 2026	Aug. 07,2026	Radiation (03CH07-HY)
Signal Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 28,2025	Mar. 23, 2026 ~ Mar. 26, 2026	Mar. 27,2026	Radiation (03CH07-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Nov. 26, 2025	Mar. 26, 2026 ~ Apr. 30, 2026	Nov. 25, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 19,2026	Mar. 23, 2026 ~ Apr. 30, 2026	Feb. 18,2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 19,2026	Mar. 23, 2026 ~ Apr. 30, 2026	Feb. 18,2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 13,2025	Mar. 23, 2026 ~ Apr. 30, 2026	Sep. 12,2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 19,2026	Mar. 23, 2026 ~ Apr. 30, 2026	Feb. 18,2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 23,2025	Mar. 23, 2026 ~ Apr. 21, 2026	Apr. 22,2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 22,2026	Apr. 22, 2026 ~ Apr. 30, 2026	Apr. 21,2027	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Mar. 23, 2026 ~ Apr. 30, 2026	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Mar. 23, 2026 ~ Apr. 30, 2026	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Mar. 23, 2026 ~ Apr. 30, 2026	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Mar. 23, 2026 ~ Apr. 30, 2026	N/A	Radiation (03CH07-HY)
Software	Audix	E3	RK-002396	N/A	N/A	Mar. 23, 2026 ~ Apr. 30, 2026	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 02,2026	Mar. 23, 2026 ~ Apr. 30, 2026	Mar. 01,2027	Radiation (03CH07-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Dec. 09,2025	Mar. 23, 2026 ~ Apr. 30, 2026	Dec. 08,2026	Radiation (03CH07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.7 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.3 dB

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.7 dB

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.5 dB

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9 dB

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2026/3/17~5/1	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	149	5745	16.59	16.45	20.58	19.89	15.09	15.08	0.5	Pass
11a	6Mbps	2	157	5785	16.52	16.44	19.97	19.31	15.07	15.09	0.5	Pass
11a	6Mbps	2	165	5825	16.54	16.44	19.99	19.26	15.12	15.07	0.5	Pass
VHT20	MCS0	2	149	5745	17.71	17.66	21.34	20.55	15.12	13.83	0.5	Pass
VHT20	MCS0	2	157	5785	17.63	17.66	20.89	20.62	13.87	15.10	0.5	Pass
VHT20	MCS0	2	165	5825	17.65	17.67	20.88	20.65	15.09	14.41	0.5	Pass
VHT40	MCS0	2	151	5755	36.17	36.06	40.74	40.59	34.13	35.05	0.5	Pass
VHT40	MCS0	2	159	5795	36.03	35.92	40.69	40.13	32.60	32.60	0.5	Pass
VHT80	MCS0	2	155	5775	74.79	75.07	82.59	82.40	67.63	66.38	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	149	5745	8.30	8.50	11.41	30.00		0.80		Pass
11a	6Mbps	2	157	5785	8.40	8.60	11.51	30.00		0.80		Pass
11a	6Mbps	2	165	5825	8.90	8.90	11.91	30.00		0.80		Pass
HT20	MCS0	2	149	5745	8.60	8.70	11.66	30.00		0.80		Pass
HT20	MCS0	2	157	5785	8.10	8.30	11.21	30.00		0.80		Pass
HT20	MCS0	2	165	5825	8.60	8.60	11.61	30.00		0.80		Pass
HT40	MCS0	2	151	5755	8.50	8.60	11.56	30.00		0.80		Pass
HT40	MCS0	2	159	5795	8.40	8.20	11.31	30.00		0.80		Pass
VHT20	MCS0	2	149	5745	8.70	8.80	11.76	30.00		0.80		Pass
VHT20	MCS0	2	157	5785	8.20	8.40	11.31	30.00		0.80		Pass
VHT20	MCS0	2	165	5825	8.70	8.70	11.71	30.00		0.80		Pass
VHT40	MCS0	2	151	5755	8.60	8.70	11.66	30.00		0.80		Pass
VHT40	MCS0	2	159	5795	8.50	8.30	11.41	30.00		0.80		Pass
VHT80	MCS0	2	155	5775	8.30	8.40	11.36	30.00		0.80		Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-3 MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	149	5745	0.04	0.04	-4.66	-4.01	-1.00	30.00		3.23		Pass
11a	6Mbps	2	157	5785	0.04	0.04	-4.13	-3.85	-0.84	30.00		3.23		Pass
11a	6Mbps	2	165	5825	0.04	0.04	-3.93	-3.84	-0.83	30.00		3.23		Pass
VHT20	MCS0	2	149	5745	0.02	0.01	-4.78	-4.11	-1.10	30.00		3.23		Pass
VHT20	MCS0	2	157	5785	0.02	0.01	-4.95	-4.50	-1.49	30.00		3.23		Pass
VHT20	MCS0	2	165	5825	0.02	0.01	-4.70	-4.45	-1.44	30.00		3.23		Pass
VHT40	MCS0	2	151	5755	0.03	0.03	-7.43	-7.02	-4.01	30.00		3.23		Pass
VHT40	MCS0	2	159	5795	0.03	0.03	-7.32	-7.11	-4.10	30.00		3.23		Pass
VHT80	MCS0	2	155	5775	0.04	0.04	-9.55	-9.71	-6.54	30.00		3.23		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	149	5745	Full	18.89	18.90	21.24	21.06	15.17	15.79	0.5	Pass
HE20	MCS0	2	149	5745	26/0	18.81	18.59	20.77	20.63	2.10	2.08	0.5	Pass
HE20	MCS0	2	149	5745	52/37	18.65	18.53	21.59	21.23	16.99	4.54	0.5	Pass
HE20	MCS0	2	149	5745	106/53	18.44	18.32	22.17	21.26	17.16	15.79	0.5	Pass
HE20	MCS0	2	157	5785	Full	18.83	18.91	21.03	21.02	15.29	15.34	0.5	Pass
HE20	MCS0	2	157	5785	26/4	17.20	16.83	19.33	18.58	15.04	2.64	0.5	Pass
HE20	MCS0	2	157	5785	52/38	17.27	17.05	19.86	19.05	14.99	14.93	0.5	Pass
HE20	MCS0	2	157	5785	106/53	18.42	18.33	21.80	22.10	17.14	17.73	0.5	Pass
HE20	MCS0	2	165	5825	Full	18.85	18.91	21.07	21.33	15.15	15.12	0.5	Pass
HE20	MCS0	2	165	5825	26/8	18.95	18.86	21.14	20.83	17.02	2.10	0.5	Pass
HE20	MCS0	2	165	5825	52/40	18.61	18.66	21.46	21.45	17.07	15.83	0.5	Pass
HE20	MCS0	2	165	5825	106/54	18.43	18.43	21.86	21.15	17.82	17.35	0.5	Pass
HE40	MCS0	2	151	5755	Full	37.83	37.79	41.47	41.42	34.90	35.02	0.5	Pass
HE40	MCS0	2	151	5755	242/61	37.83	38.05	43.10	42.75	36.68	36.59	0.5	Pass
HE40	MCS0	2	159	5795	Full	37.66	37.71	41.18	41.14	33.82	33.92	0.5	Pass
HE40	MCS0	2	159	5795	242/62	38.03	37.70	43.58	42.35	37.87	36.86	0.5	Pass
HE80	MCS0	2	155	5775	Full	76.72	76.89	83.46	83.30	75.07	71.34	0.5	Pass
HE80	MCS0	2	155	5775	484/65	78.15	77.78	120.93	87.33	76.67	76.91	0.5	Pass
HE80	MCS0	2	155	5775	484/66	78.29	77.82	123.58	97.57	77.44	76.93	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	149	5745	Full	8.80	8.90	11.86	30.00		0.80		Pass
HE20	MCS0	2	149	5745	26/0	8.02	8.81	11.44	30.00		0.80		Pass
HE20	MCS0	2	149	5745	52/37	8.43	8.96	11.71	30.00		0.80		Pass
HE20	MCS0	2	149	5745	106/53	8.72	8.56	11.65	30.00		0.80		Pass
HE20	MCS0	2	157	5785	Full	8.30	8.50	11.41	30.00		0.80		Pass
HE20	MCS0	2	157	5785	26/4	8.90	8.81	11.87	30.00		0.80		Pass
HE20	MCS0	2	157	5785	52/38	8.98	8.67	11.84	30.00		0.80		Pass
HE20	MCS0	2	157	5785	106/53	8.68	8.36	11.53	30.00		0.80		Pass
HE20	MCS0	2	165	5825	Full	8.80	8.80	11.81	30.00		0.80		Pass
HE20	MCS0	2	165	5825	26/8	8.52	8.96	11.76	30.00		0.80		Pass
HE20	MCS0	2	165	5825	52/40	8.61	8.76	11.70	30.00		0.80		Pass
HE20	MCS0	2	165	5825	106/54	8.82	8.54	11.69	30.00		0.80		Pass
HE40	MCS0	2	151	5755	Full	8.80	8.90	11.86	30.00		0.80		Pass
HE40	MCS0	2	151	5755	242/61	8.79	8.78	11.80	30.00		0.80		Pass
HE40	MCS0	2	159	5795	Full	8.60	8.50	11.56	30.00		0.80		Pass
HE40	MCS0	2	159	5795	242/62	8.61	8.50	11.57	30.00		0.80		Pass
HE80	MCS0	2	155	5775	Full	8.40	8.50	11.46	30.00		0.80		Pass
HE80	MCS0	2	155	5775	484/65	8.94	8.70	11.83	30.00		0.80		Pass
HE80	MCS0	2	155	5775	484/66	8.95	8.77	11.87	30.00		0.80		Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-3 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	149	5745	Full	0.02	0.02	-4.93	-4.12	-1.11	30.00		3.23		Pass
HE20	MCS0	2	149	5745	26/0	0.02	0.01	1.99	3.05	6.06	30.00		3.23		Pass
HE20	MCS0	2	149	5745	52/37	0.02	0.01	-0.55	0.49	3.50	30.00		3.23		Pass
HE20	MCS0	2	149	5745	106/53	0.01	0.01	-2.91	-1.74	1.27	30.00		3.23		Pass
HE20	MCS0	2	157	5785	Full	0.02	0.02	-5.01	-4.53	-1.52	30.00		3.23		Pass
HE20	MCS0	2	157	5785	26/4	0.02	0.01	2.86	3.04	6.05	30.00		3.23		Pass
HE20	MCS0	2	157	5785	52/38	0.02	0.01	0.47	-0.04	3.48	30.00		3.23		Pass
HE20	MCS0	2	157	5785	106/53	0.01	0.01	-3.05	-3.77	-0.04	30.00		3.23		Pass
HE20	MCS0	2	165	5825	Full	0.02	0.02	-4.83	-4.61	-1.60	30.00		3.23		Pass
HE20	MCS0	2	165	5825	26/8	0.02	0.01	2.49	3.23	6.24	30.00		3.23		Pass
HE20	MCS0	2	165	5825	52/40	0.02	0.01	-0.22	0.15	3.16	30.00		3.23		Pass
HE20	MCS0	2	165	5825	106/54	0.01	0.01	-3.09	-2.65	0.36	30.00		3.23		Pass
HE40	MCS0	2	151	5755	Full	0.06	0.05	-7.34	-6.79	-3.78	30.00		3.23		Pass
HE40	MCS0	2	151	5755	242/61	0.01	0.02	-6.39	-5.09	-2.08	30.00		3.23		Pass
HE40	MCS0	2	159	5795	Full	0.06	0.05	-7.27	-7.07	-4.06	30.00		3.23		Pass
HE40	MCS0	2	159	5795	242/62	0.01	0.02	-6.56	-6.46	-3.45	30.00		3.23		Pass
HE80	MCS0	2	155	5775	Full	0.02	0.02	-9.66	-9.91	-6.65	30.00		3.23		Pass
HE80	MCS0	2	155	5775	484/65	0.03	0.03	-9.06	-9.34	-6.05	30.00		3.23		Pass
HE80	MCS0	2	155	5775	484/66	0.03	0.03	-8.95	-9.20	-5.94	30.00		3.23		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

Test Result of 6dB and 26dB and 99% Occupied Bandwidth

MIMO <Ant. 6+7>

<802.11a>

6dB Bandwidth	26dB Bandwidth
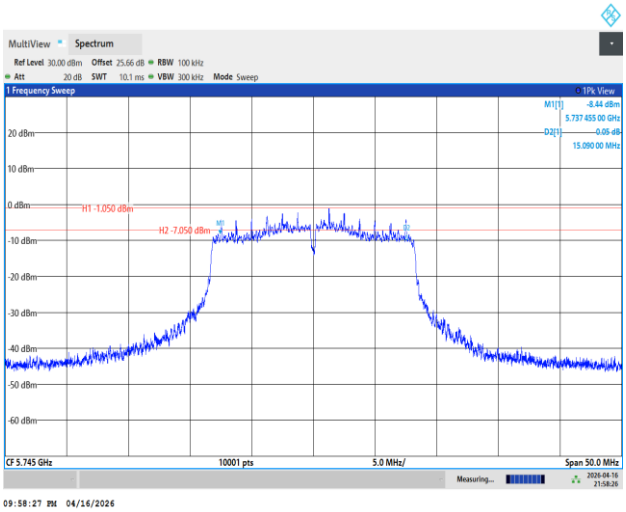	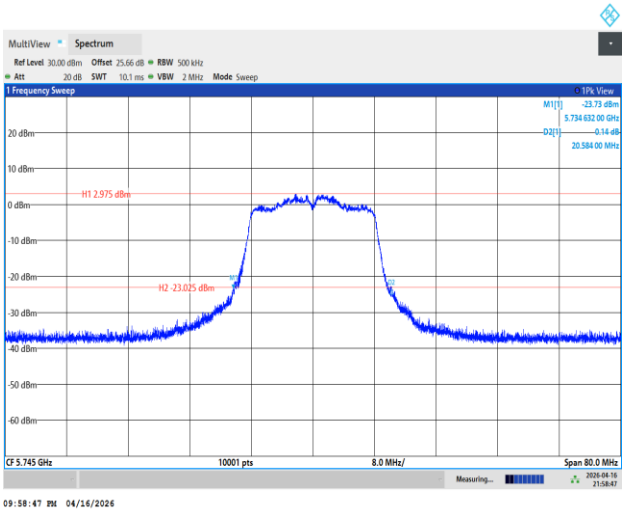
99% Occupied Bandwidth	**N/A**
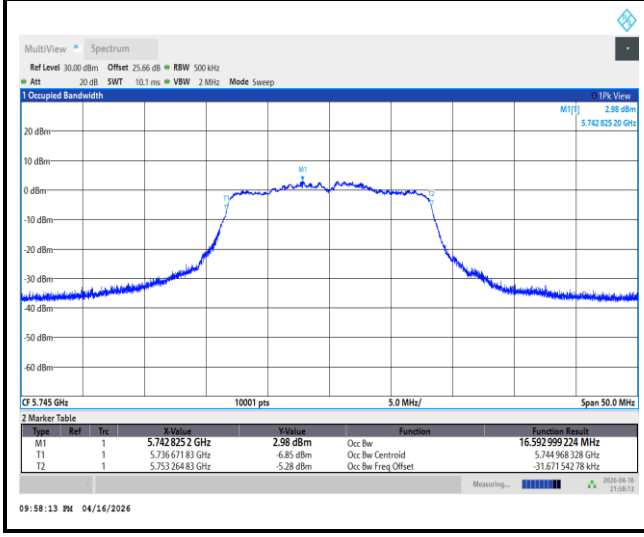	

<802.11ac VHT20>

6dB Bandwidth	26dB Bandwidth
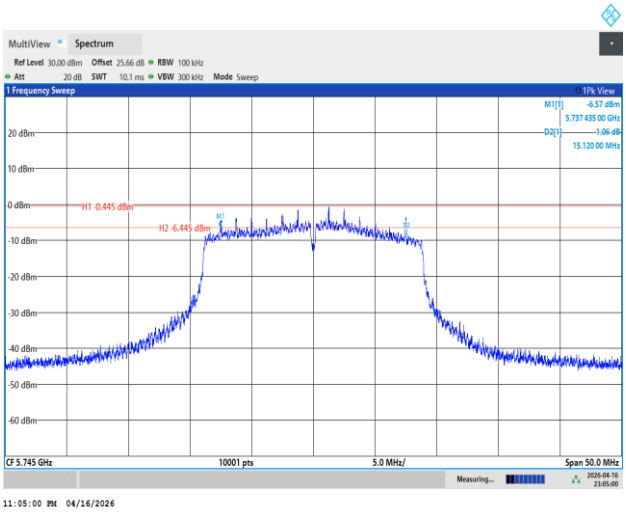	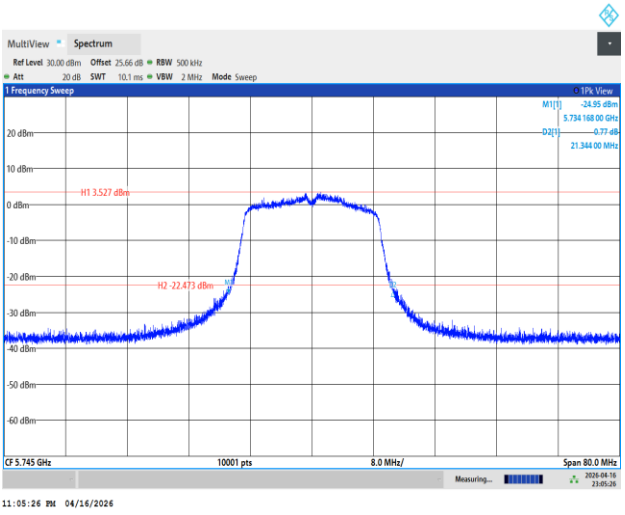
99% Occupied Bandwidth	**N/A**
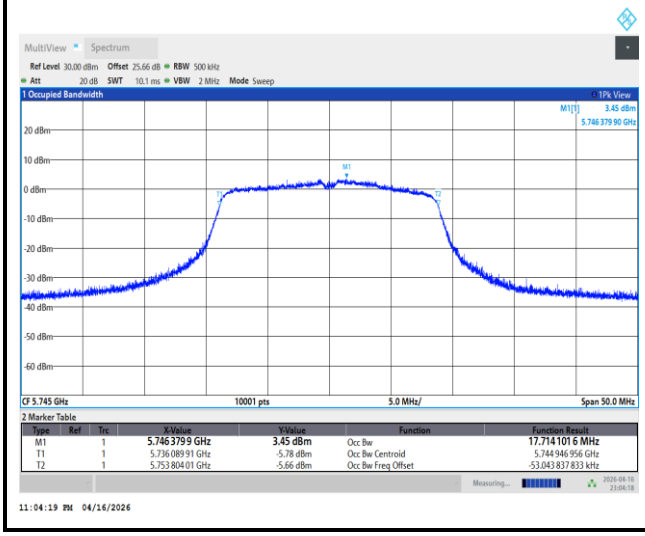	

<802.11ac VHT40>

6dB Bandwidth	26dB Bandwidth
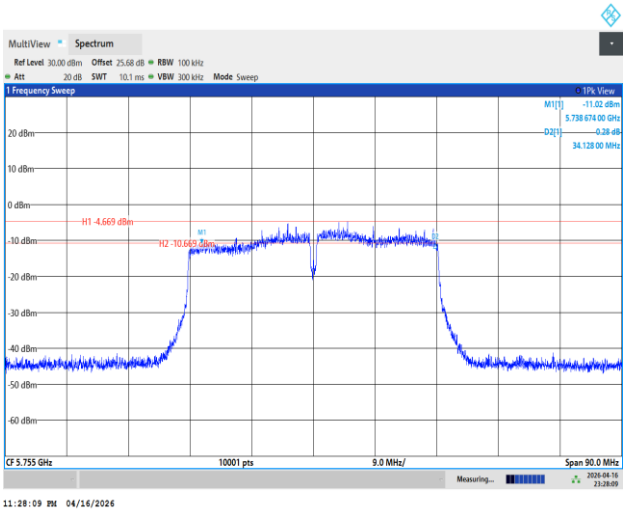	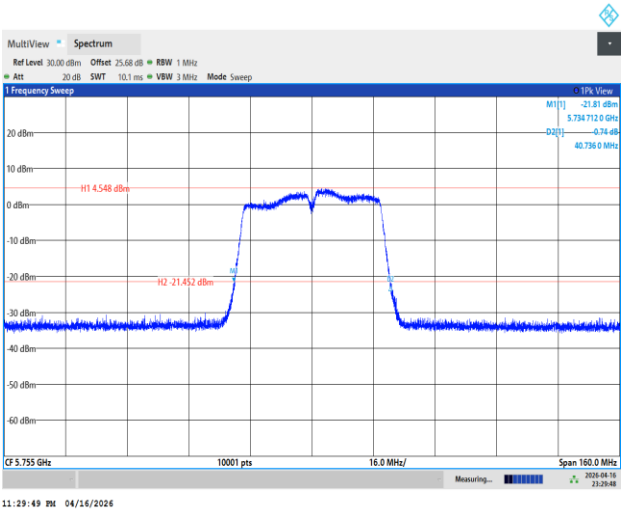
99% Occupied Bandwidth	**N/A**
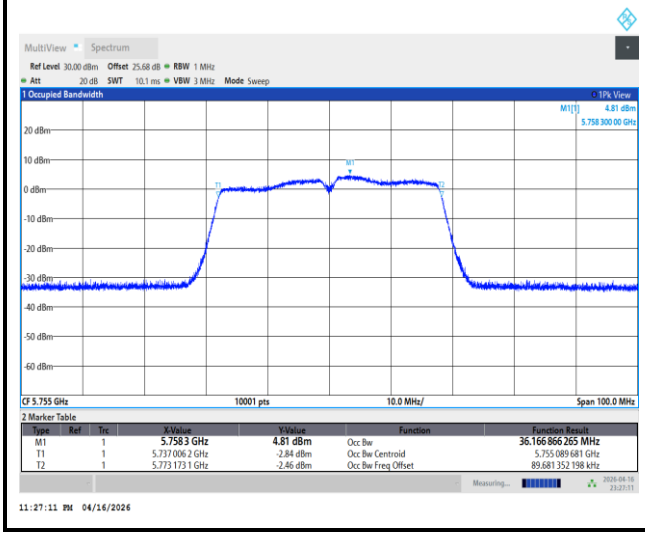	

<802.11ac VHT80>

6dB Bandwidth	26dB Bandwidth
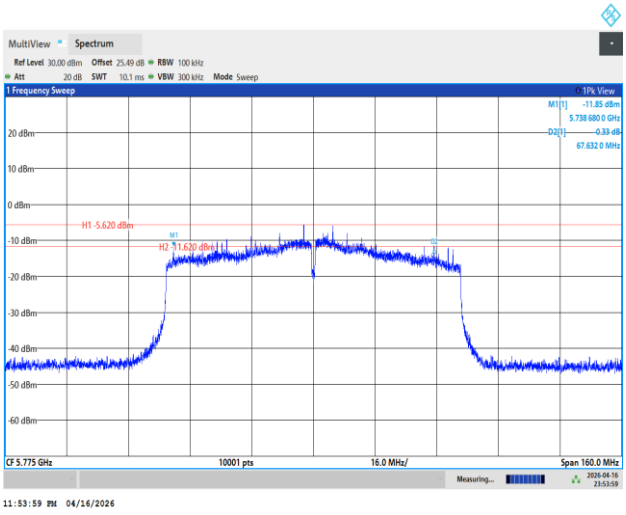	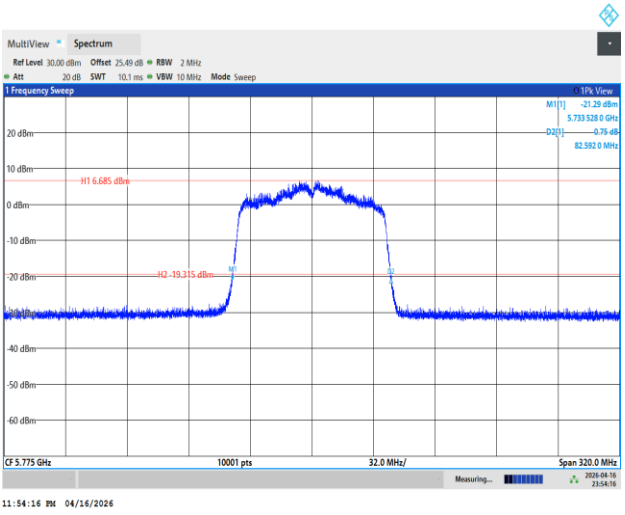
99% Occupied Bandwidth	**N/A**
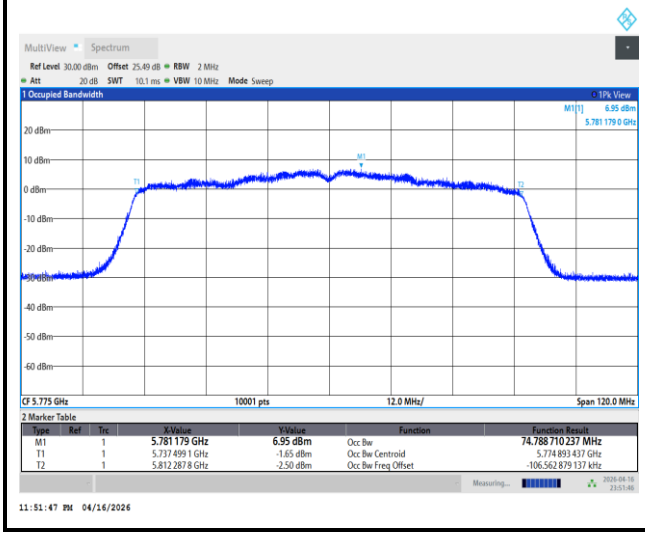	

<802.11ax HE20>

6dB Bandwidth	26dB Bandwidth
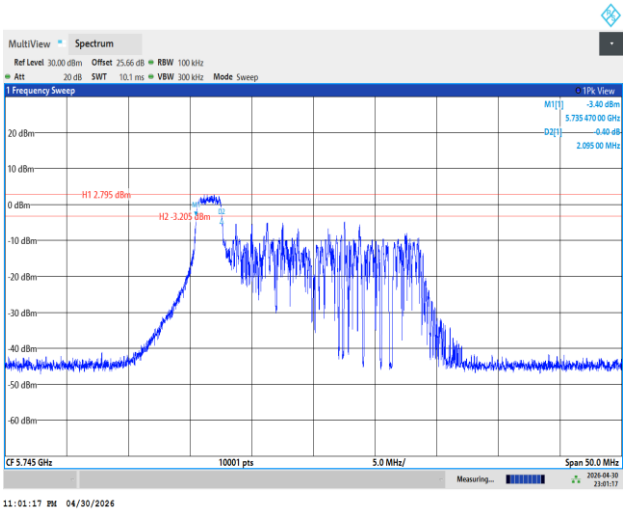	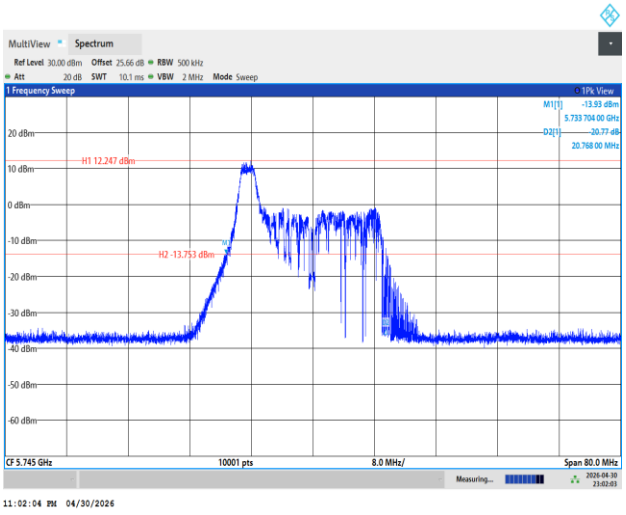
99% Occupied Bandwidth	**N/A**
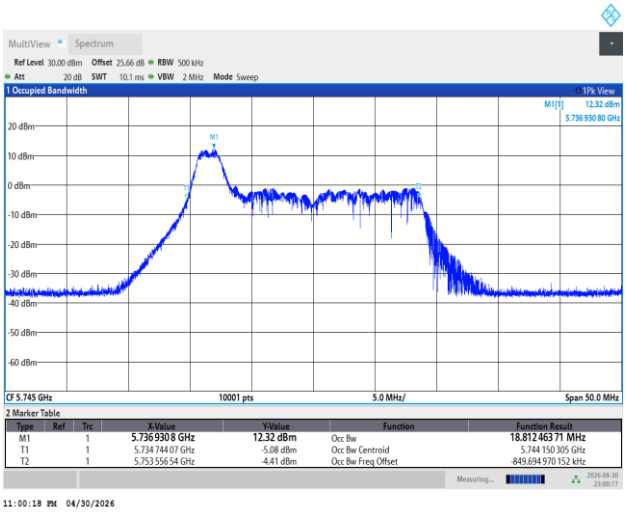	

<802.11ax HE40>

6dB Bandwidth	26dB Bandwidth
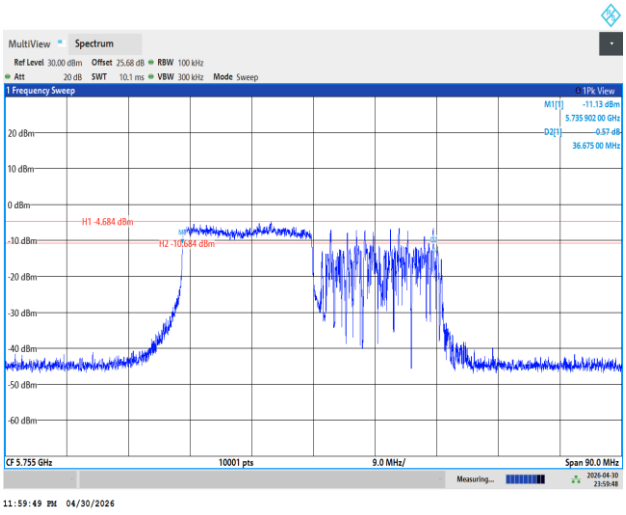	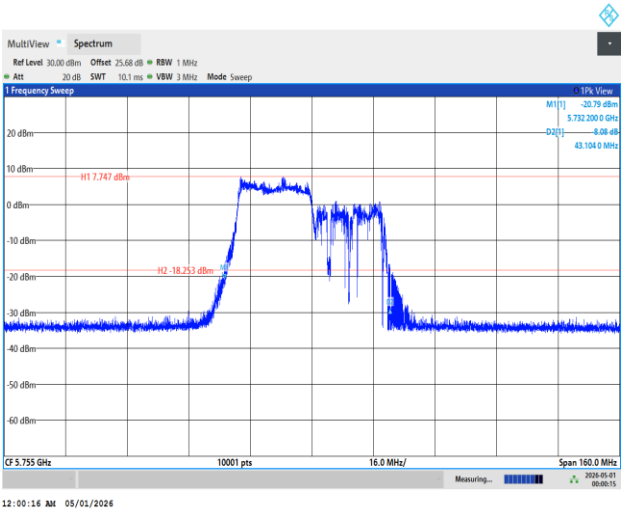
99% Occupied Bandwidth	**N/A**
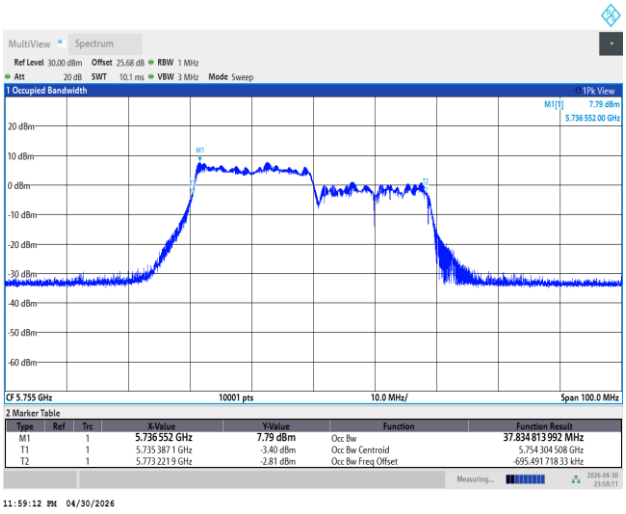	

<802.11ax HE80>

6dB Bandwidth	26dB Bandwidth
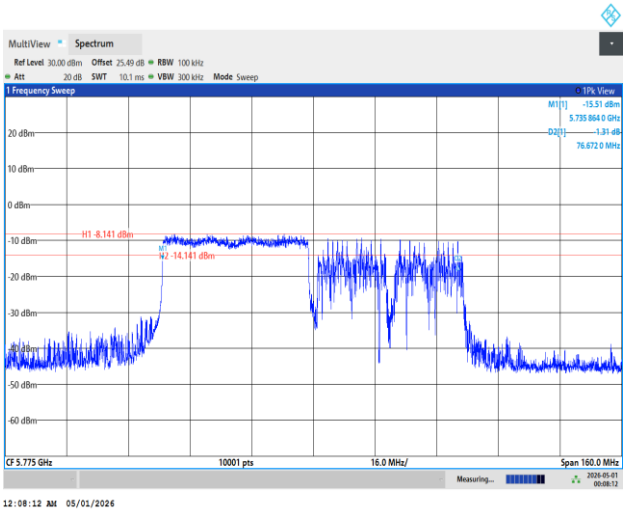	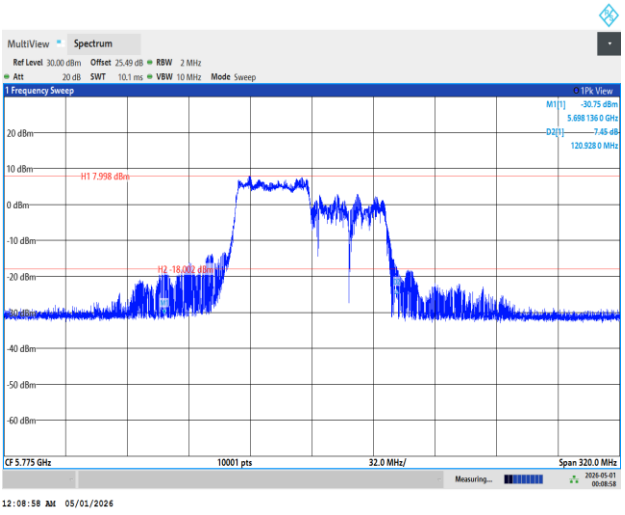
99% Occupied Bandwidth	**N/A**
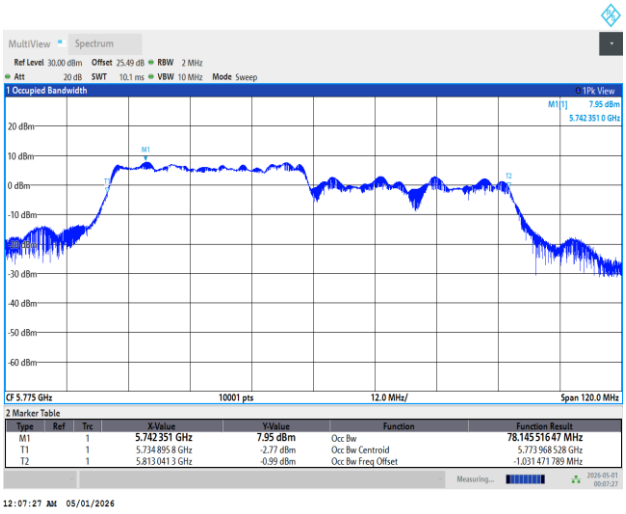	

Test Result of Power Spectral Density

<802.11a>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
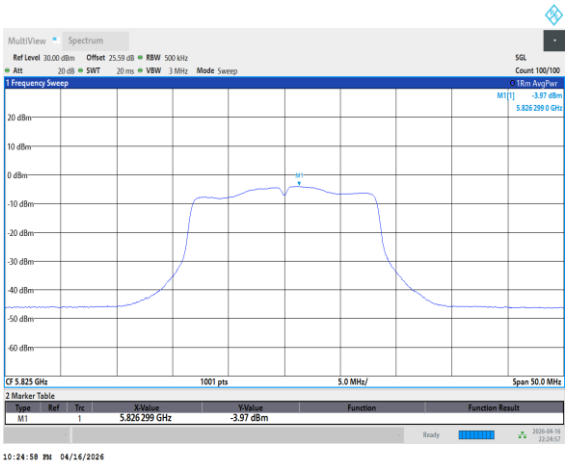	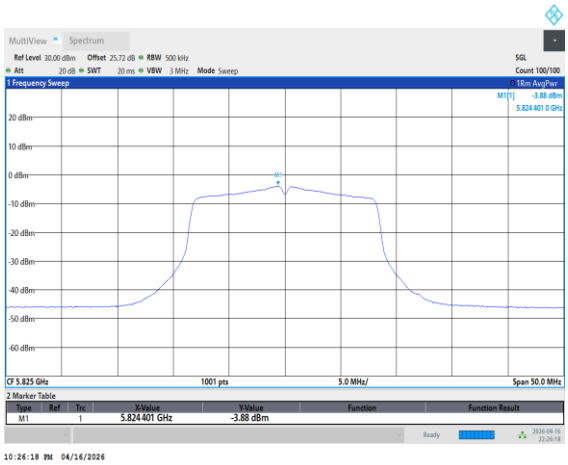

<802.11ac VHT20>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
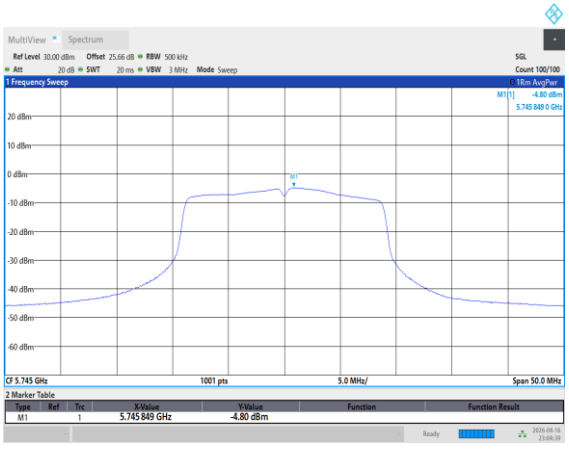	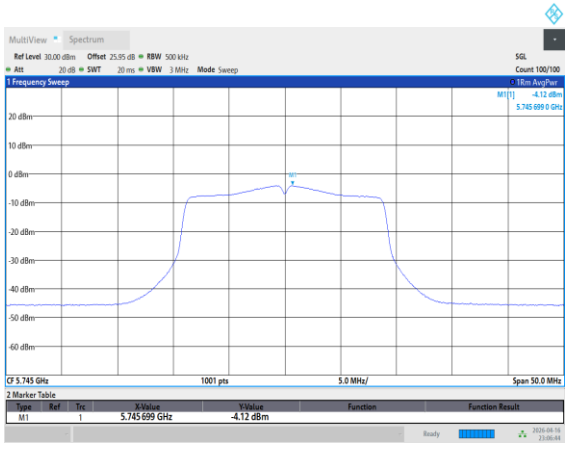

<802.11ac VHT40>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
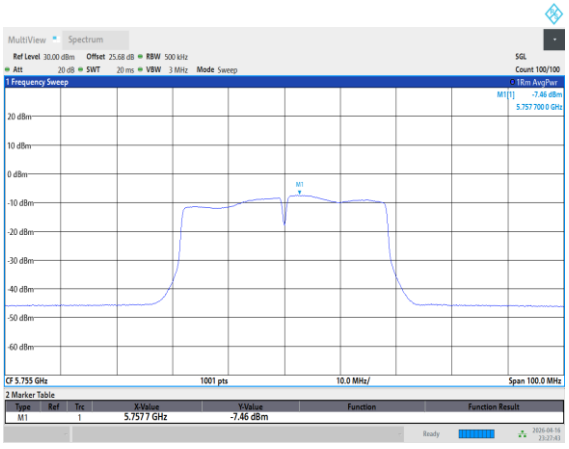	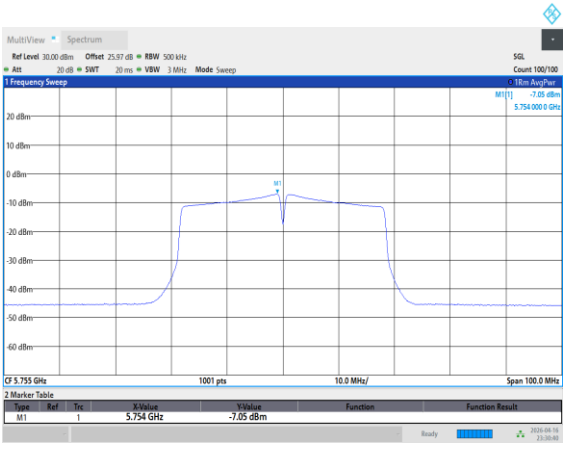

<802.11ac VHT80>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
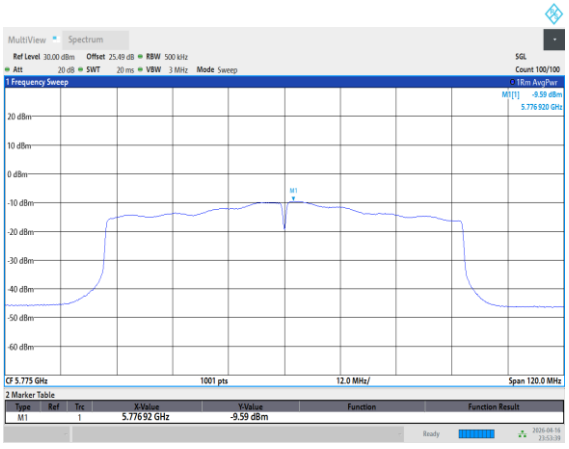	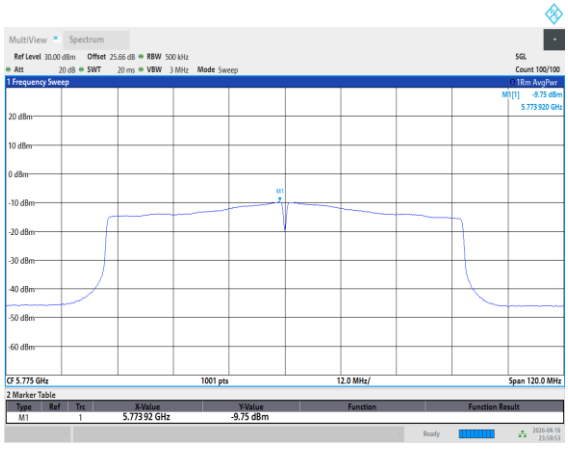

<802.11ax HE20>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
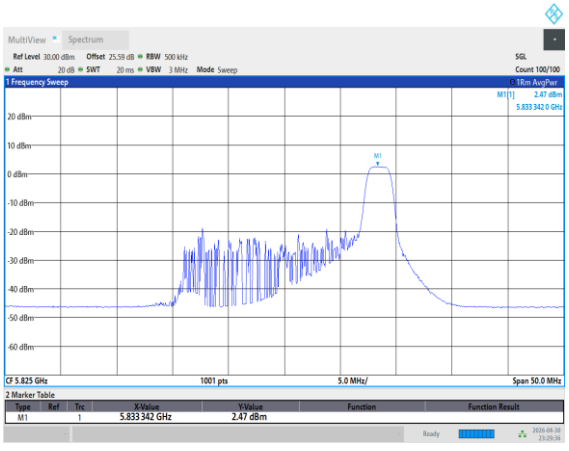	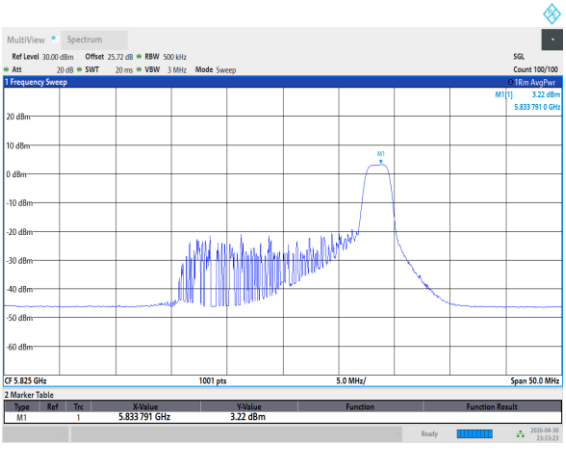

<802.11ax HE40>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
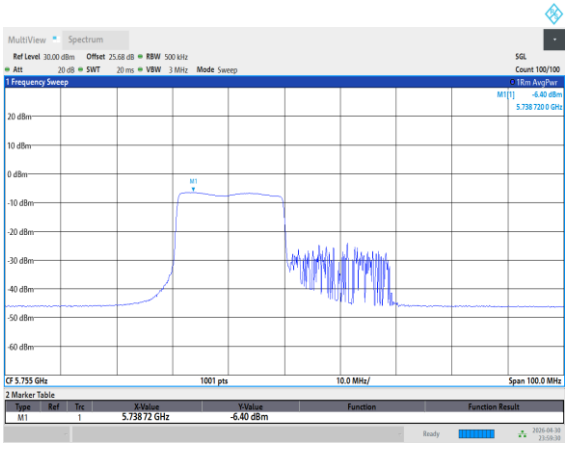	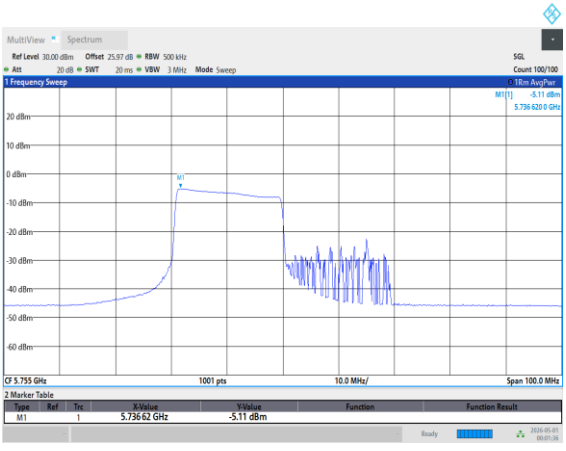

<802.11ax HE80>

Maximum Power Density Plot (dBm/500kHz)	
Ant. 6	**Ant. 7**
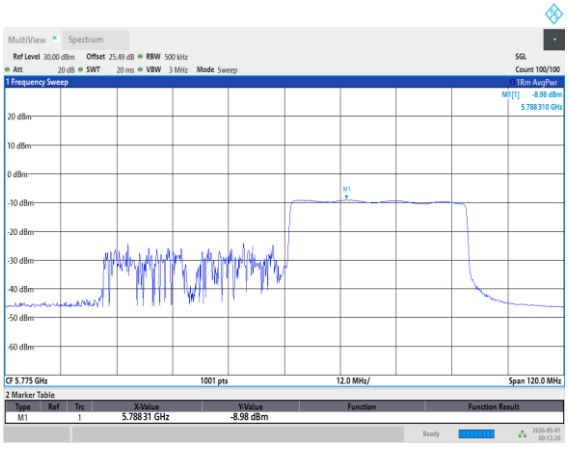	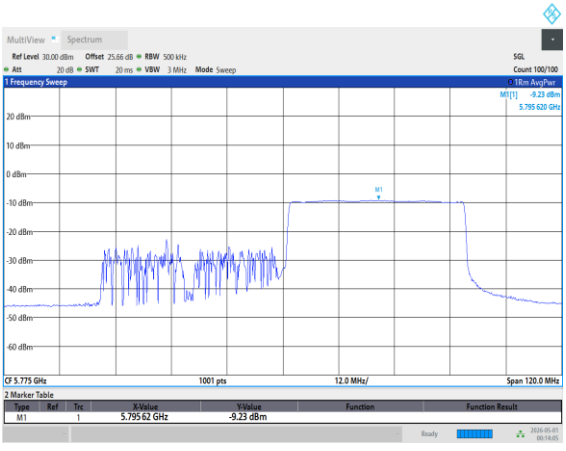

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO :	620304
Test Mode :	Mode 1
Test Voltage :	120Vac/60Hz
Phase :	Line

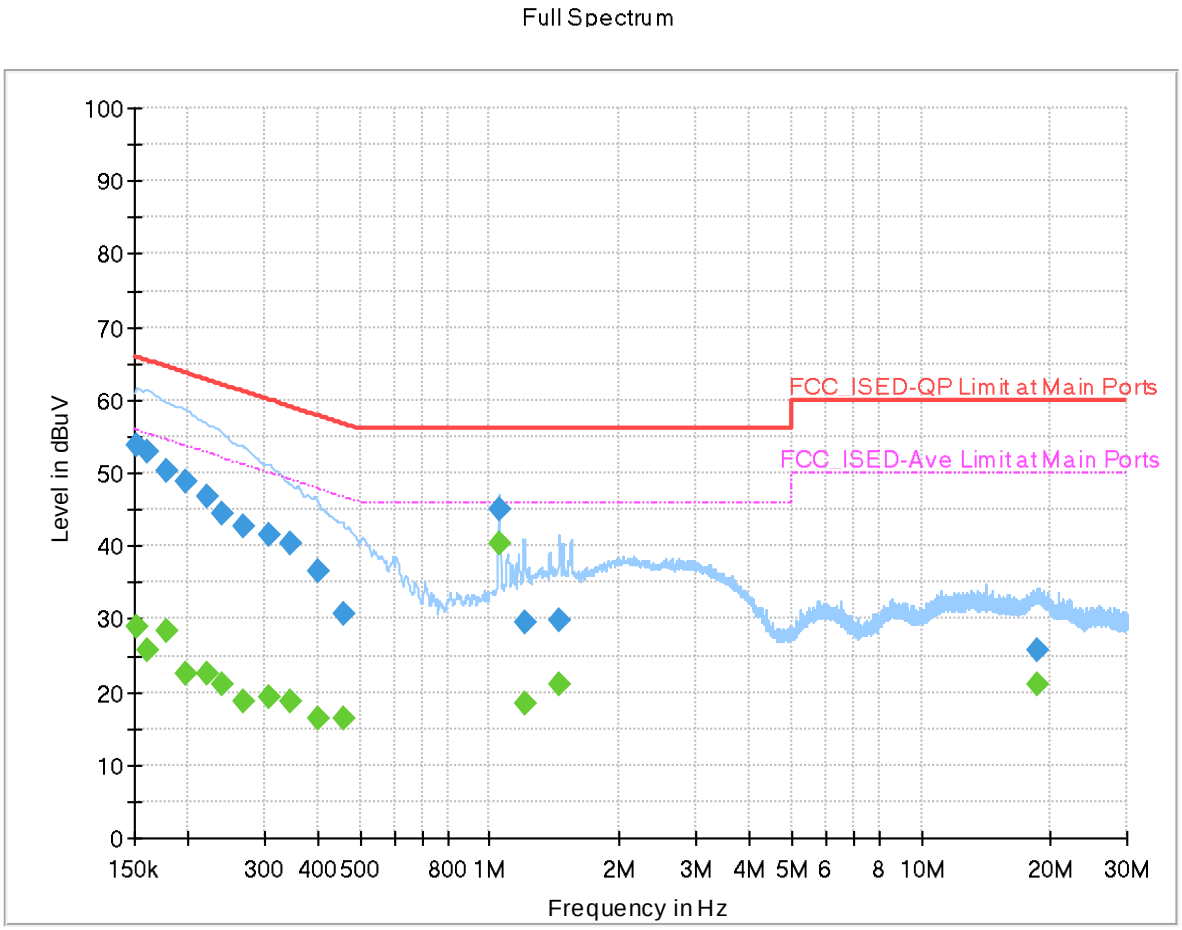

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	28.95	55.88	26.93	L1	ON	20.1
0.152250	53.68	---	65.88	12.20	L1	ON	20.1
0.161250	---	25.72	55.40	29.68	L1	ON	20.1
0.161250	53.07	---	65.40	12.33	L1	ON	20.1
0.177000	---	28.38	54.63	26.25	L1	ON	20.1
0.177000	50.33	---	64.63	14.30	L1	ON	20.1
0.197250	---	22.57	53.73	31.16	L1	ON	20.1
0.197250	48.79	---	63.73	14.94	L1	ON	20.1
0.219750	---	22.52	52.83	30.31	L1	ON	20.1
0.219750	46.84	---	62.83	15.99	L1	ON	20.1
0.240000	---	21.01	52.10	31.09	L1	ON	20.1
0.240000	44.53	---	62.10	17.57	L1	ON	20.1
0.267000	---	18.84	51.21	32.37	L1	ON	20.1
0.267000	42.73	---	61.21	18.48	L1	ON	20.1
0.307500	---	19.18	50.04	30.86	L1	ON	20.0
0.307500	41.40	---	60.04	18.64	L1	ON	20.0
0.345750	---	18.80	49.06	30.26	L1	ON	20.0
0.345750	40.28	---	59.06	18.78	L1	ON	20.0
0.397500	---	16.24	47.91	31.67	L1	ON	20.0

0.397500	36.57	---	57.91	21.34	L1	ON	20.0
0.456000	---	16.43	46.77	30.34	L1	ON	20.0
0.456000	30.60	---	56.77	26.17	L1	ON	20.0
1.050000	---	40.22	46.00	5.78	L1	ON	20.0
1.050000	44.96	---	56.00	11.04	L1	ON	20.0
1.203000	---	18.46	46.00	27.54	L1	ON	20.0
1.203000	29.45	---	56.00	26.55	L1	ON	20.0
1.448250	---	20.91	46.00	25.09	L1	ON	20.0
1.448250	29.88	---	56.00	26.12	L1	ON	20.0
18.629250	---	21.08	50.00	28.92	L1	ON	20.8
18.629250	25.84	---	60.00	34.16	L1	ON	20.8

EUT Information

Report NO :	620304
Test Mode :	Mode 1
Test Voltage :	120Vac/60Hz
Phase :	Neutral

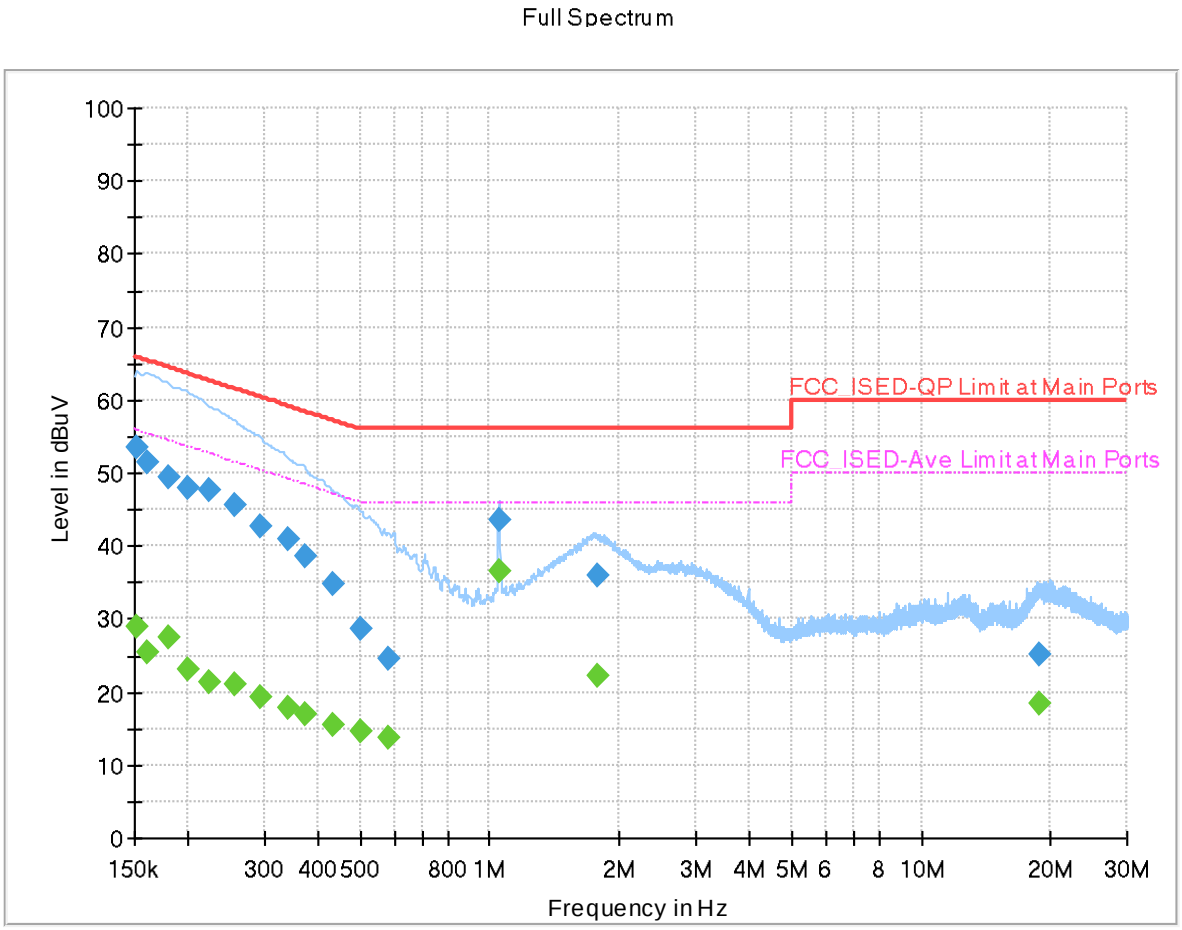

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.01	55.88	26.87	N	ON	20.1
0.152250	53.55	---	65.88	12.33	N	ON	20.1
0.161250	---	25.33	55.40	30.07	N	ON	20.1
0.161250	51.38	---	65.40	14.02	N	ON	20.1
0.179250	---	27.37	54.52	27.15	N	ON	20.1
0.179250	49.31	---	64.52	15.21	N	ON	20.1
0.199500	---	23.21	53.63	30.42	N	ON	20.1
0.199500	47.89	---	63.63	15.74	N	ON	20.1
0.224250	---	21.44	52.66	31.22	N	ON	20.1
0.224250	47.62	---	62.66	15.04	N	ON	20.1
0.255750	---	21.12	51.57	30.45	N	ON	20.1
0.255750	45.74	---	61.57	15.83	N	ON	20.1
0.294000	---	19.38	50.41	31.03	N	ON	20.0
0.294000	42.61	---	60.41	17.80	N	ON	20.0
0.341250	---	17.83	49.17	31.34	N	ON	20.0
0.341250	41.03	---	59.17	18.14	N	ON	20.0
0.375000	---	16.93	48.39	31.46	N	ON	20.0
0.375000	38.70	---	58.39	19.69	N	ON	20.0
0.433500	---	15.56	47.19	31.63	N	ON	20.0

0.433500	34.93	---	57.19	22.26	N	ON	20.0
0.503250	---	14.51	46.00	31.49	N	ON	20.0
0.503250	28.56	---	56.00	27.44	N	ON	20.0
0.582000	---	13.71	46.00	32.29	N	ON	20.0
0.582000	24.69	---	56.00	31.31	N	ON	20.0
1.050000	---	36.57	46.00	9.43	N	ON	20.0
1.050000	43.60	---	56.00	12.40	N	ON	20.0
1.776750	---	22.12	46.00	23.88	N	ON	20.0
1.776750	35.96	---	56.00	20.04	N	ON	20.0
18.795750	---	18.32	50.00	31.68	N	ON	20.8
18.795750	25.28	---	60.00	34.72	N	ON	20.8

Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu	**Temperature :**	18.2~21.3°C
		Relative Humidity :	56.4~68.6%

Note symbol

-L	**Low channel location**
-R	**High channel location**

C1.Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 58	U-NII-3	5.725-5.85	6+7	802.11a	149	5745	6Mbps	-	-
Mode 59	U-NII-3	5.725-5.85	6+7	802.11a	157	5785	6Mbps	-	-
Mode 60	U-NII-3	5.725-5.85	6+7	802.11a	165	5825	6Mbps	-	-
Mode 61	U-NII-3	5.725-5.85	6+7	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 62	U-NII-3	5.725-5.85	6+7	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 63	U-NII-3	5.725-5.85	6+7	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 64	U-NII-3	5.725-5.85	6+7	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 65	U-NII-3	5.725-5.85	6+7	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 66	U-NII-3	5.725-5.85	6+7	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 67	U-NII-3	5.725-5.85	6+7	802.11ax HE20	165	5825	MCS0	Partial RU 106/54	-
Mode 68	U-NII-3	5.725-5.85	6+7	802.11ax HE40	159	5795	MCS0	Partial RU 242/62	-

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 69	U-NII-3	5.725-5.85	6+7	802.11ax HE80	155	5775	MCS0	Partial RU 484/66	-
Mode 70	U-NII-3	5.725-5.85	6+7	802.11ac VHT20	165	5825	MCS0	-	-
Mode 71	U-NII-3	5.725-5.85	6+7	802.11ac VHT40	159	5795	MCS0	-	-
Mode 72	U-NII-3	5.725-5.85	6+7	802.11ac VHT80	155	5775	MCS0	-	-
Mode 73	U-NII-3	5.725-5.85	6+7	802.11ax HE20	165	5825	MCS0	Partial RU 106/54	LF
Mode 74	U-NII-3	5.725-5.85	6+7	802.11ax HE20	165	5825	MCS0	Partial RU 106/54	SHF
Mode 93	U-NII-3	5.725-5.85	6+7	802.11ax HE20	149	5745	MCS0	Partial RU 26/0	-
Mode 94	U-NII-3	5.725-5.85	6+7	802.11ax HE20	149	5745	MCS0	Partial RU 52/37	-
Mode 95	U-NII-3	5.725-5.85	6+7	802.11ax HE20	149	5745	MCS0	Partial RU 106/53	-
Mode 96	U-NII-3	5.725-5.85	6+7	802.11ax HE20	157	5785	MCS0	Partial RU 106/53	-
Mode 97	U-NII-3	5.725-5.85	6+7	802.11ax HE20	165	5825	MCS0	Partial RU 26/8	-

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 98	U-NII-3	5.725-5.85	6+7	802.11ax HE20	165	5825	MCS0	Partial RU 52/40	-

C2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
58	802.11a	149	5644.66	48.82	68.20	-19.38	V	Peak	Pass	-	Band Edge
	802.11a	149	17235.00	51.19	68.20	-17.01	H	Peak	Pass	-	Harmonic
59	802.11a	157	5933.67	50.11	68.20	-18.09	H	Peak	Pass	-	Band Edge
	802.11a	157	17355.00	51.37	68.20	-16.83	V	Peak	Pass	-	Harmonic
60	802.11a	165	5932.50	49.75	68.20	-18.45	V	Peak	Pass	-	Band Edge
	802.11a	165	17475.00	50.68	68.20	-17.52	H	Peak	Pass	-	Harmonic
61	802.11ax HE20	149	5618.85	48.40	68.20	-19.80	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	149	17235.00	50.90	68.20	-17.30	V	Peak	Pass	Full RU	Harmonic
62	802.11ax HE20	157	5943.40	50.03	68.20	-18.17	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	157	17355.00	50.19	68.20	-18.01	H	Peak	Pass	Full RU	Harmonic
63	802.11ax HE20	165	5934.63	49.41	68.20	-18.79	H	Peak	Pass	Full RU	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
63	802.11ax HE20	165	17475.00	50.94	68.20	-17.26	V	Peak	Pass	Full RU	Harmonic
64	802.11ax HE40	151	5940.25	49.52	68.20	-18.68	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	151	17265.00	50.04	68.20	-18.16	H	Peak	Pass	Full RU	Harmonic
65	802.11ax HE40	159	5944.73	50.26	68.20	-17.94	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	159	17385.00	48.49	68.20	-19.71	H	Peak	Pass	Full RU	Harmonic
66	802.11ax HE80	155	5939.50	50.85	68.20	-17.35	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE80	155	17325.00	49.35	68.20	-18.85	H	Peak	Pass	Full RU	Harmonic
67	802.11ax HE20	165	5927.50	49.90	68.20	-18.30	V	Peak	Pass	Partial RU 106/54	Band Edge
	802.11ax HE20	165	17475.00	51.47	68.20	-16.73	V	Peak	Pass	Partial RU 106/54	Harmonic
68	802.11ax HE40	159	5945.82	50.27	68.20	-17.93	H	Peak	Pass	Partial RU 242/62	Band Edge
	802.11ax HE40	159	17385.00	51.28	68.20	-16.92	H	Peak	Pass	Partial RU 242/62	Harmonic

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
69	802.11ax HE80	155	5930.58	51.06	68.20	-17.14	V	Peak	Pass	Partial RU 484/66	Band Edge
	802.11ax HE80	155	17325.00	51.31	68.20	-16.89	V	Peak	Pass	Partial RU 484/66	Harmonic
70	802.11ac VHT20	165	5940.75	50.39	68.20	-17.81	H	Peak	Pass	-	Band Edge
	802.11ac VHT20	165	17475.00	49.61	68.20	-18.59	V	Peak	Pass	-	Harmonic
71	802.11ac VHT40	159	5939.31	50.34	68.20	-17.86	H	Peak	Pass	-	Band Edge
	802.11ac VHT40	159	17385.00	49.14	68.20	-19.06	H	Peak	Pass	-	Harmonic
72	802.11ac VHT80	155	5948.25	49.85	68.20	-18.35	H	Peak	Pass	-	Band Edge
	802.11ac VHT80	155	17325.00	49.81	68.20	-18.39	V	Peak	Pass	-	Harmonic
73	LF	165	41.64	30.30	40.00	-9.70	V	Peak	Pass	-	LF
74	SHF	165	39902.95	44.86	74.00	-29.14	V	Peak	Pass	-	SHF
93	802.11ax HE20	149	5621.90	50.71	68.20	-17.49	H	Peak	Pass	Partial RU 26/0	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
93	802.11ax HE20	149	17235.00	50.88	68.20	-17.32	H	Peak	Pass	Partial RU 26/0	Harmonic
94	802.11ax HE20	149	5633.35	50.38	68.20	-17.82	H	Peak	Pass	Partial RU 52/37	Band Edge
	802.11ax HE20	149	17235.00	51.38	68.20	-16.82	H	Peak	Pass	Partial RU 52/37	Harmonic
95	802.11ax HE20	149	5646.26	50.73	68.20	-17.47	V	Peak	Pass	Partial RU 106/53	Band Edge
	802.11ax HE20	149	17235.00	51.64	68.20	-16.56	V	Peak	Pass	Partial RU 106/53	Harmonic
96	802.11ax HE20	157	5946.37	52.86	68.20	-15.34	V	Peak	Pass	Partial RU 106/53	Band Edge
	802.11ax HE20	157	17355.00	51.01	68.20	-17.19	H	Peak	Pass	Partial RU 106/53	Harmonic
97	802.11ax HE20	165	5945.00	52.49	68.20	-15.71	V	Peak	Pass	Partial RU 26/8	Band Edge
	802.11ax HE20	165	17475.00	51.26	68.20	-16.94	H	Peak	Pass	Partial RU 26/8	Harmonic
98	802.11ax HE20	165	5944.38	53.30	68.20	-14.90	H	Peak	Pass	Partial RU 52/40	Band Edge
	802.11ax HE20	165	17475.00	51.24	68.20	-16.96	V	Peak	Pass	Partial RU 52/40	Harmonic

Mode	58	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	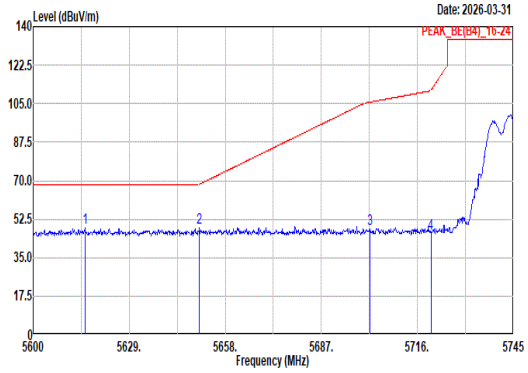 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5615.66 48.51 68.20 -19.69 35.46 34.93 13.19 35.07 0.00 239 0 Peak 2 5650.17 48.58 68.33 -19.75 35.42 35.00 13.23 35.07 0.00 239 0 Peak 3 5701.65 48.11 105.66 -57.55 34.81 35.10 13.27 35.07 0.00 239 0 Peak 4 5720.06 46.23 110.94 -64.71 32.91 35.10 13.29 35.07 0.00 239 0 Peak	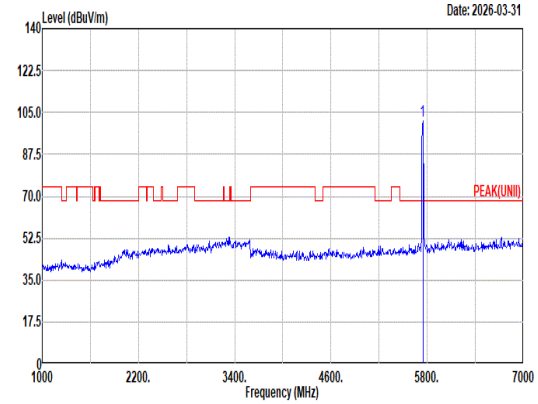 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.69 ------ ------ 88.35 35.10 13.31 35.07 0.00 239 0 Peak
Avg	Blank	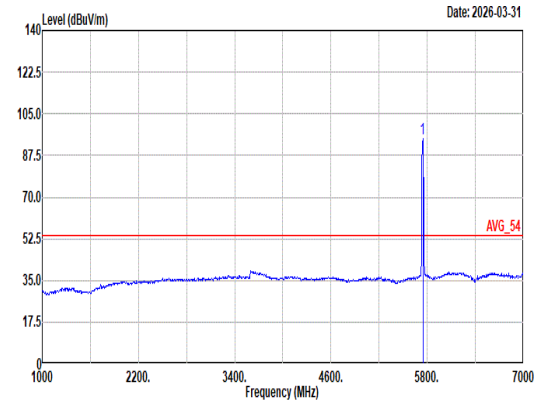 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 94.43 ------ ------ 81.09 35.10 13.31 35.07 0.00 239 0 Average

Mode	58	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	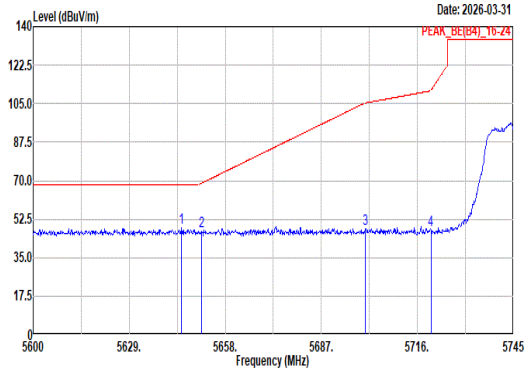 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5644.66 48.82 68.20 -19.38 35.68 34.99 13.22 35.07 0.00 314 269 Peak 2 5650.75 47.16 68.76 -21.60 34.00 35.00 13.23 35.07 0.00 314 269 Peak 3 5700.34 48.25 105.30 -57.05 34.95 35.10 13.27 35.07 0.00 314 269 Peak 4 5720.06 47.60 110.94 -63.34 34.28 35.10 13.29 35.07 0.00 314 269 Peak	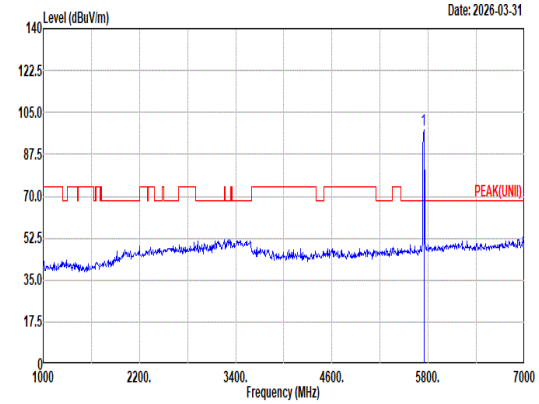 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 97.97 ------ ------ 84.63 35.10 13.31 35.07 0.00 314 269 Peak
Avg	Blank	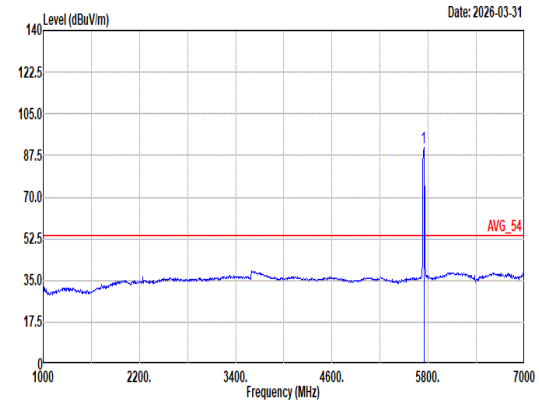 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 90.78 ------ ------ 77.44 35.10 13.31 35.07 0.00 314 269 Average

Mode	58	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	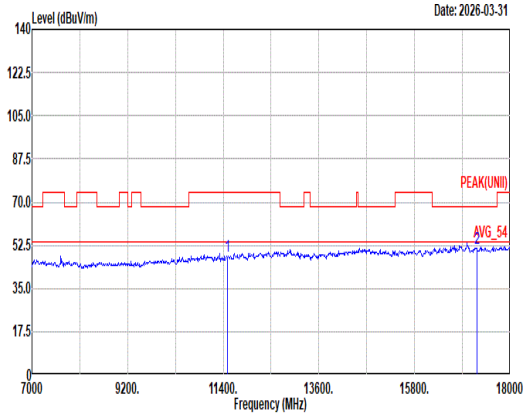 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 48.04 74.00 -25.96 46.79 38.48 18.72 57.27 1.32 -- -- Peak 2 17235.00 51.19 68.20 -17.01 41.37 41.87 22.57 56.05 1.43 -- -- Peak	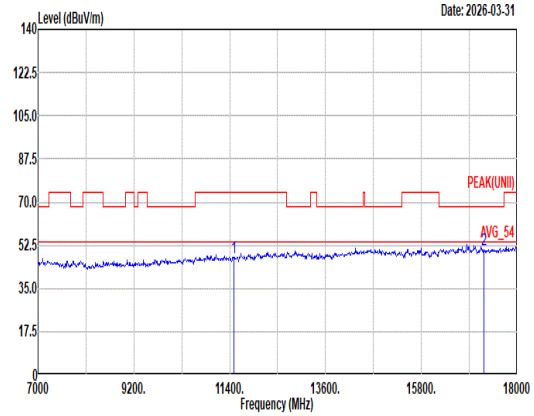 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 47.58 74.00 -26.42 46.33 38.48 18.72 57.27 1.32 -- -- Peak 2 17235.00 50.89 68.20 -17.31 41.07 41.87 22.57 56.05 1.43 -- -- Peak

Mode	58	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	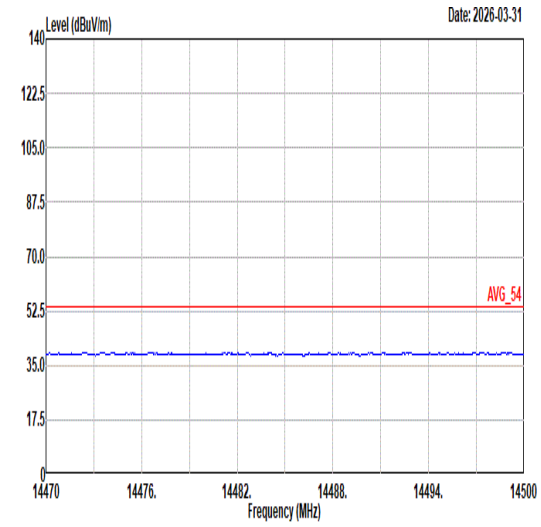 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	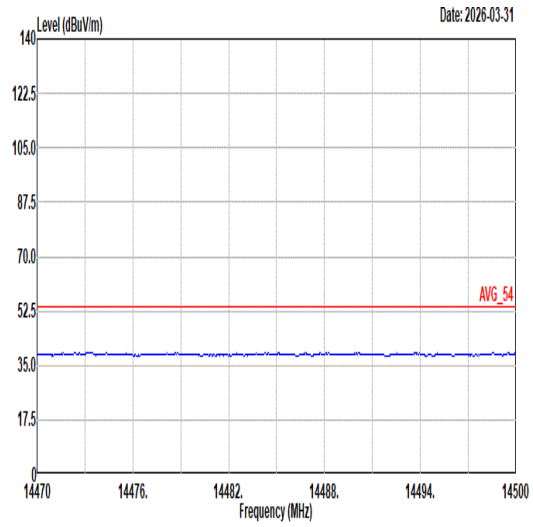 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	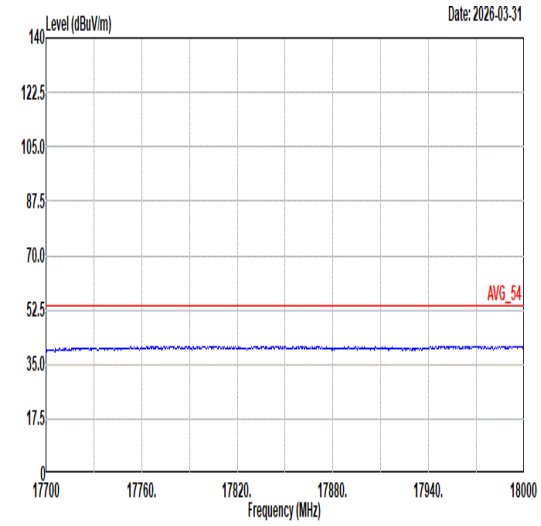 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	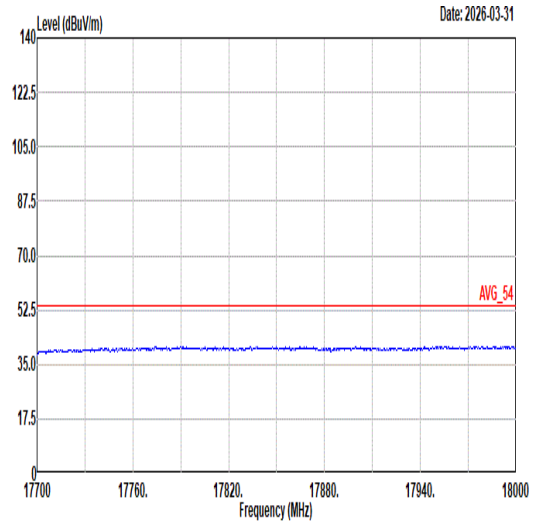 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	59
	Band Edge - L
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	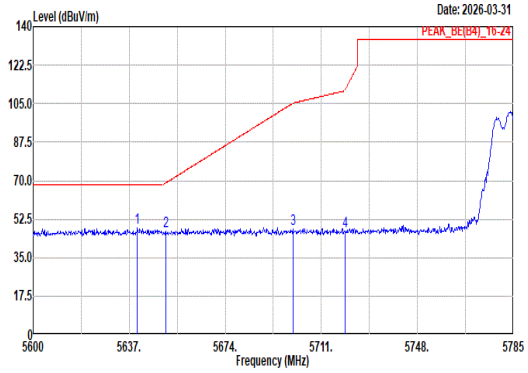 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5640.15 48.45 68.20 -19.75 35.32 34.98 13.22 35.07 0.00 211 0 Peak 2 5651.06 47.00 68.99 -21.99 33.84 35.00 13.23 35.07 0.00 211 0 Peak 3 5700.09 48.27 105.22 -56.95 34.97 35.10 13.27 35.07 0.00 211 0 Peak 4 5720.07 47.05 110.95 -63.90 33.73 35.10 13.29 35.07 0.00 211 0 Peak	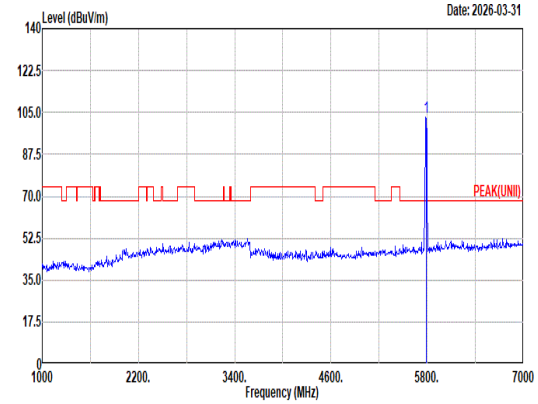 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 103.11 ------ ------ 89.67 35.16 13.34 35.06 0.00 211 0 Peak
Avg	Blank	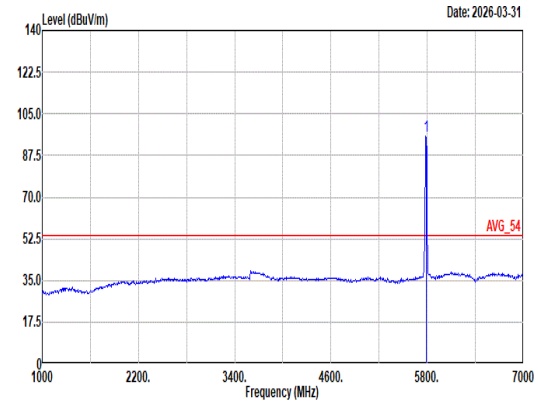 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 95.82 ------ ------ 82.38 35.16 13.34 35.06 0.00 211 0 Average

Mode	59	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	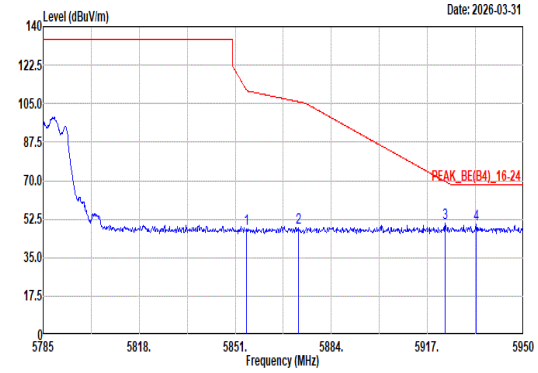 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 47.87 111.27 -63.40 34.30 35.22 13.41 35.06 0.00 211 0 Peak 2 5872.62 48.53 105.87 -57.34 34.87 35.29 13.43 35.06 0.00 211 0 Peak 3 5923.11 50.48 69.60 -19.12 36.61 35.45 13.47 35.05 0.00 211 0 Peak 4 5933.67 50.11 68.20 -18.09 36.21 35.47 13.48 35.05 0.00 211 0 Peak	Blank

Mode	59
	Band Edge - L
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	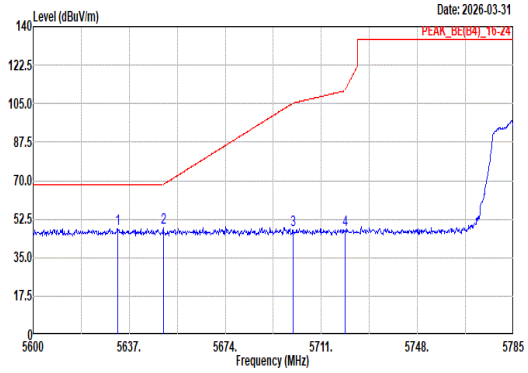 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5632.56 48.28 68.20 -19.92 35.17 34.97 13.21 35.07 0.00 309 265 Peak 2 5650.14 48.83 68.30 -19.47 35.67 35.00 13.23 35.07 0.00 309 265 Peak 3 5700.09 47.64 105.22 -57.58 34.34 35.10 13.27 35.07 0.00 309 265 Peak 4 5720.07 47.66 110.95 -63.29 34.34 35.10 13.29 35.07 0.00 309 265 Peak	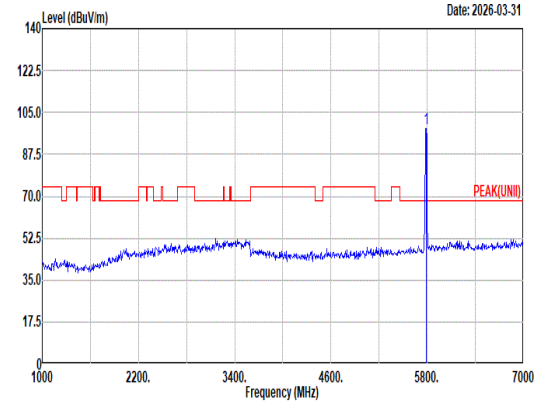 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 98.49 ------ ------ 85.05 35.16 13.34 35.06 0.00 309 265 Peak
Avg	Blank	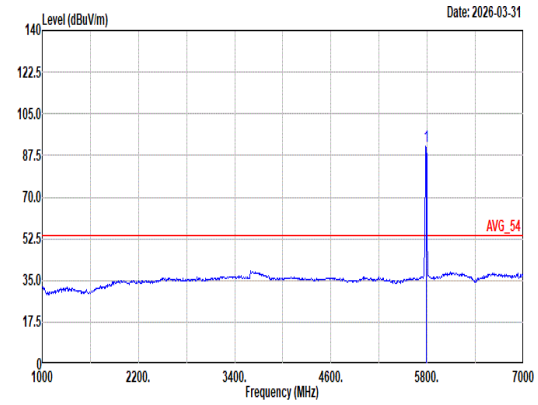 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 91.42 ------ ------ 77.98 35.16 13.34 35.06 0.00 309 265 Average

Mode	59	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	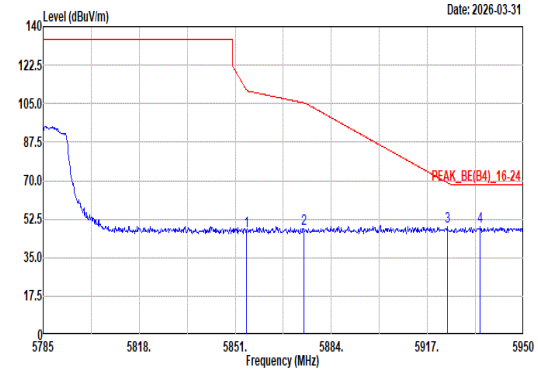 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.96 46.84 110.89 -64.05 33.27 35.22 13.41 35.06 0.00 309 265 Peak 2 5874.60 48.26 105.31 -57.05 34.59 35.30 13.43 35.06 0.00 309 265 Peak 3 5923.77 48.99 69.11 -20.12 35.12 35.45 13.47 35.05 0.00 309 265 Peak 4 5935.15 48.92 68.20 -19.28 35.02 35.47 13.48 35.05 0.00 309 265 Peak	Blank

Mode	59	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	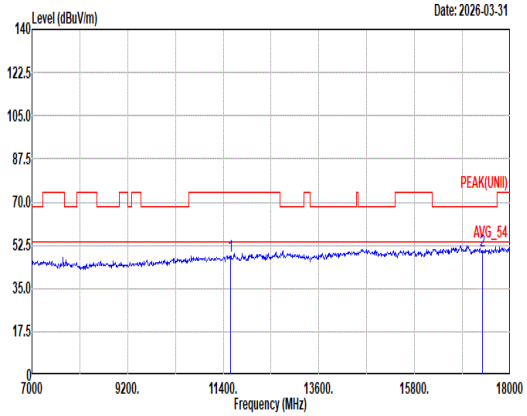 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 48.01 74.00 -25.99 46.36 38.64 18.80 57.12 1.33 -- -- Peak 2 17355.00 50.15 68.20 -18.05 40.74 41.53 22.62 56.19 1.45 -- -- Peak	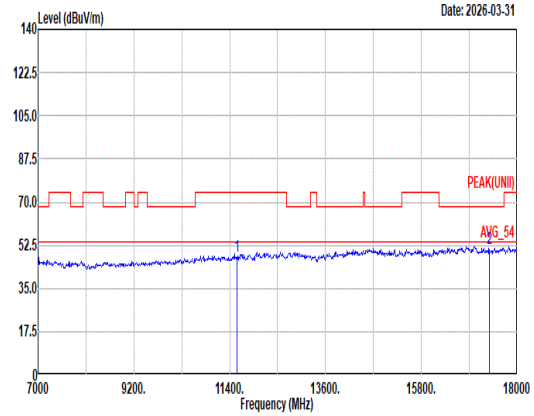 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 47.91 74.00 -26.09 46.26 38.64 18.80 57.12 1.33 -- -- Peak 2 17355.00 51.37 68.20 -16.83 41.96 41.53 22.62 56.19 1.45 -- -- Peak

Mode	59	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	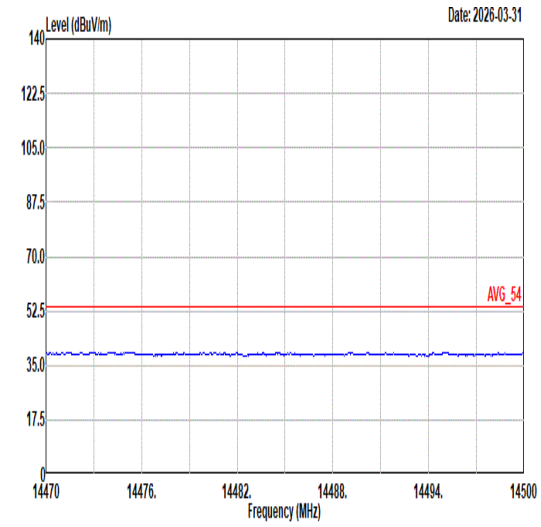 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	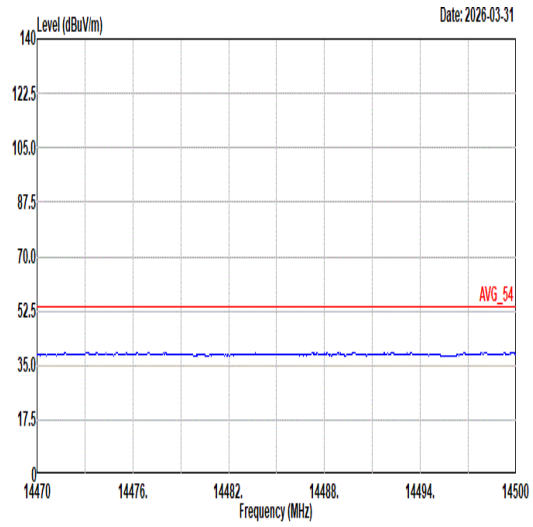 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	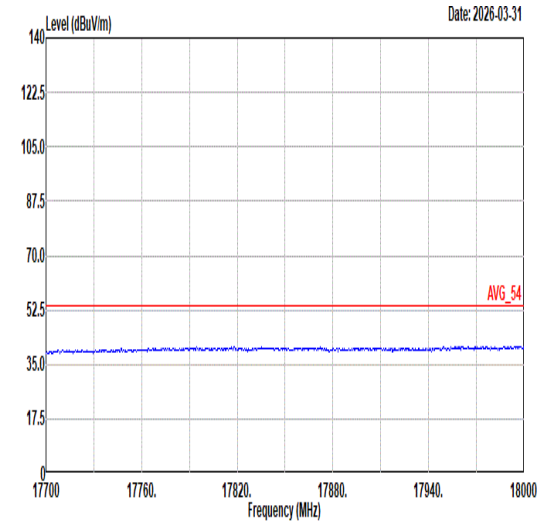 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	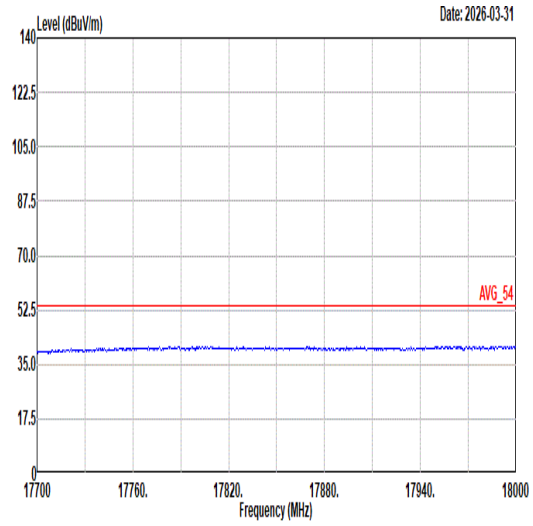 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	60	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	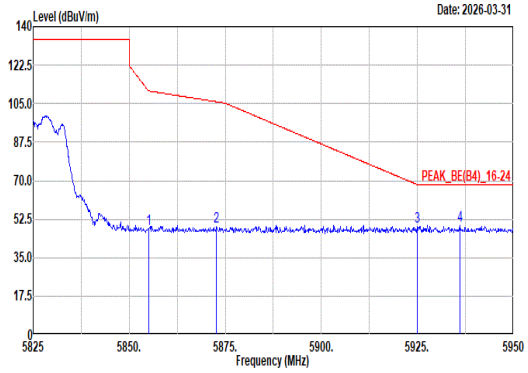 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 47.94 110.80 -62.86 34.37 35.22 13.41 35.06 0.00 209 0 Peak 2 5872.75 49.18 105.83 -56.65 35.52 35.29 13.43 35.06 0.00 209 0 Peak 3 5924.88 49.15 68.29 -19.14 35.28 35.45 13.47 35.05 0.00 209 0 Peak 4 5936.00 49.52 68.20 -18.68 35.62 35.47 13.48 35.05 0.00 209 0 Peak	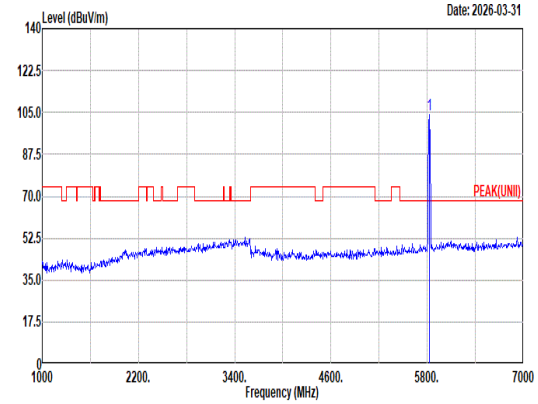 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 104.27 ------ ------ 90.75 35.20 13.38 35.06 0.00 209 0 Peak
Avg	Blank	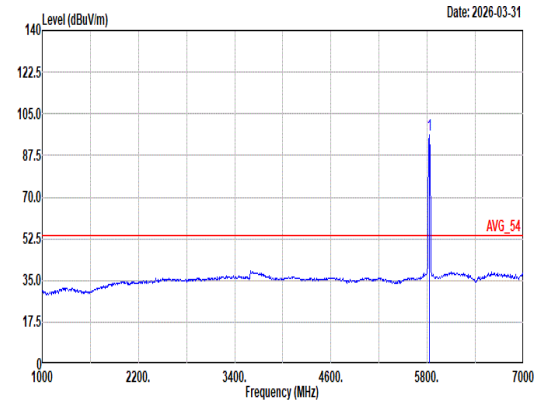 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 96.24 ------ ------ 82.72 35.20 13.38 35.06 0.00 209 0 Average

Mode	60
	Band Edge
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	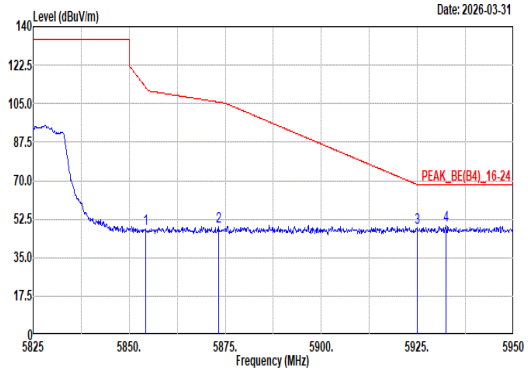 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.38 48.17 112.22 -64.05 34.60 35.22 13.41 35.06 0.00 307 265 Peak 2 5873.25 48.95 105.69 -56.74 35.29 35.29 13.43 35.06 0.00 307 265 Peak 3 5924.88 48.53 68.29 -19.76 34.66 35.45 13.47 35.05 0.00 307 265 Peak 4 5932.50 49.75 68.20 -18.45 35.85 35.47 13.48 35.05 0.00 307 265 Peak	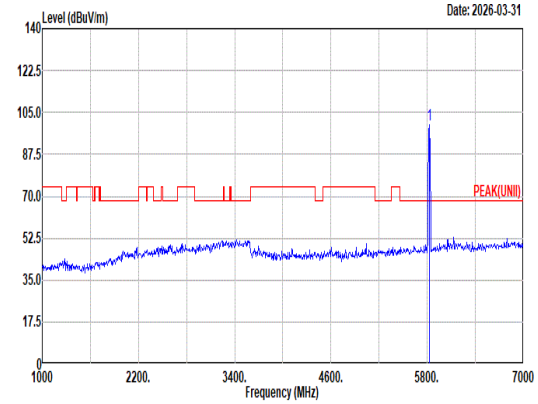 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 99.96 ------ ------ 86.44 35.20 13.38 35.06 0.00 307 265 Peak
Avg	Blank	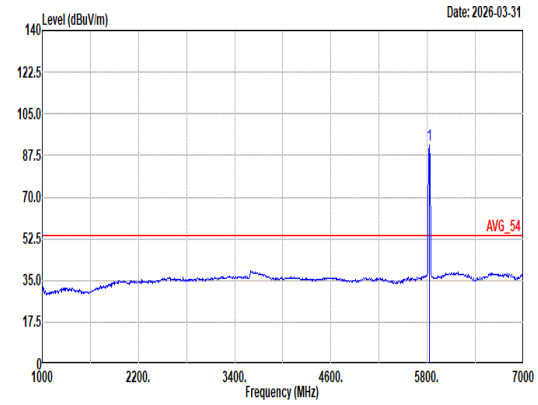 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 92.06 ------ ------ 78.54 35.20 13.38 35.06 0.00 307 265 Average

Mode	60	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	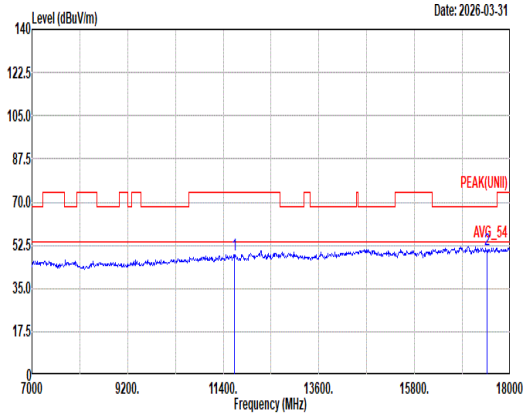 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 48.79 74.00 -25.21 46.92 38.60 18.88 56.96 1.35 -- -- Peak 2 17475.00 50.68 68.20 -17.52 41.08 41.80 22.67 56.34 1.47 -- -- Peak	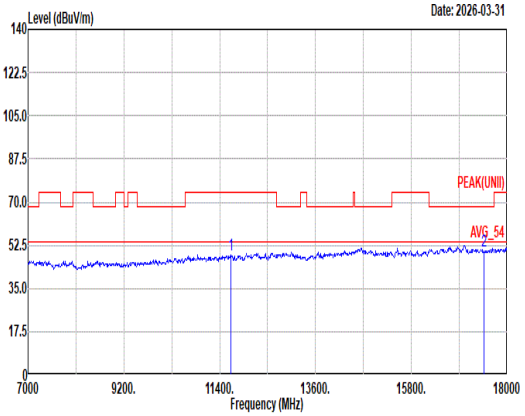 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 48.53 74.00 -25.47 46.66 38.60 18.88 56.96 1.35 -- -- Peak 2 17475.00 50.43 68.20 -17.77 40.83 41.80 22.67 56.34 1.47 -- -- Peak

Mode	60	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	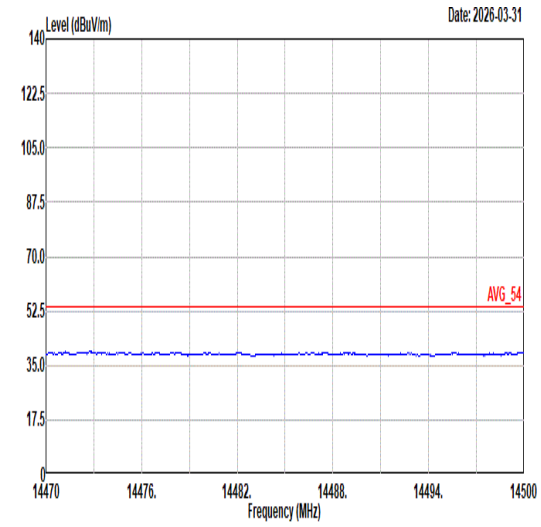 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	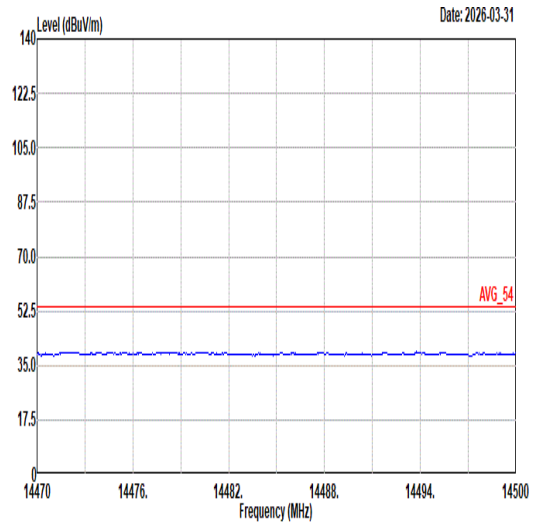 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	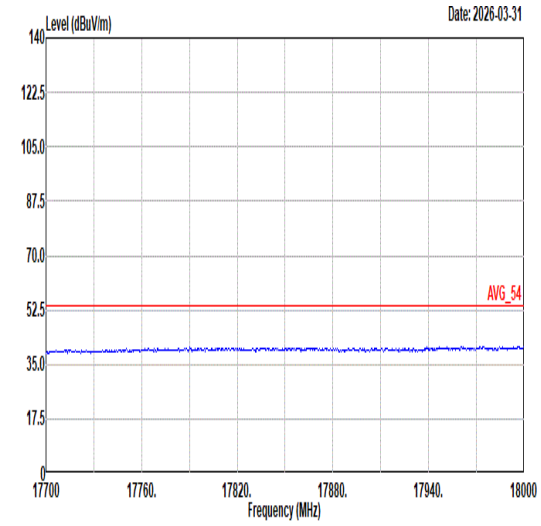 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	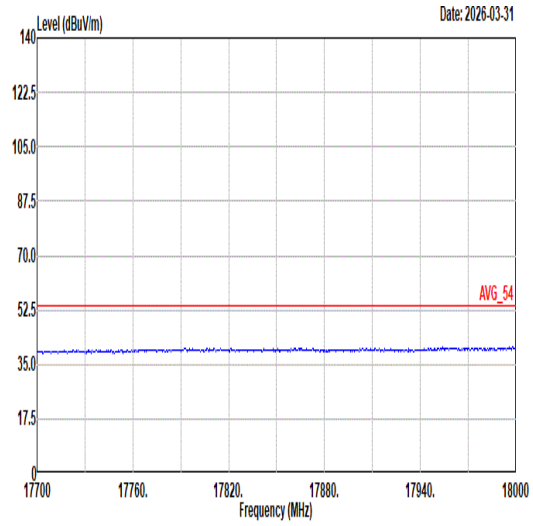 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	61	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	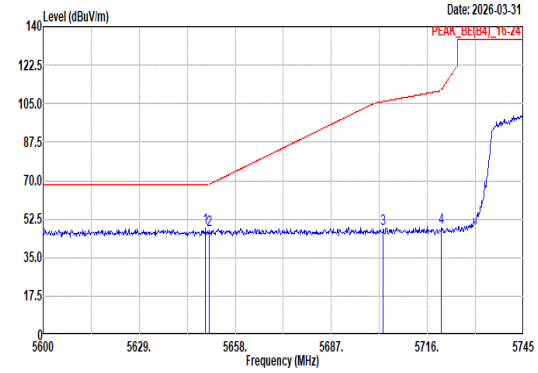 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.01 48.36 68.20 -19.84 35.21 35.00 13.22 35.07 0.00 239 0 Peak 2 5650.03 47.79 68.22 -20.43 34.63 35.00 13.23 35.07 0.00 239 0 Peak 3 5702.66 48.30 105.95 -57.65 35.00 35.10 13.27 35.07 0.00 239 0 Peak 4 5720.21 48.44 111.27 -62.83 35.12 35.10 13.29 35.07 0.00 239 0 Peak	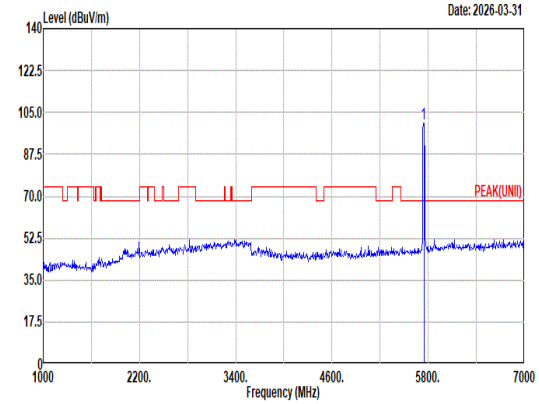 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 100.28 ------ ------ 86.94 35.10 13.31 35.07 0.00 239 0 Peak
Avg	Blank	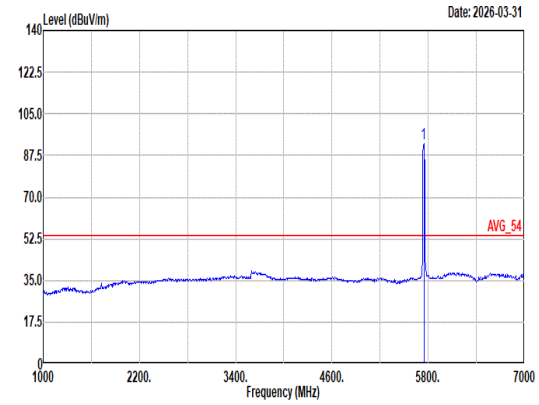 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 92.27 ------ ------ 78.93 35.10 13.31 35.07 0.00 239 0 Average

Mode	61	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	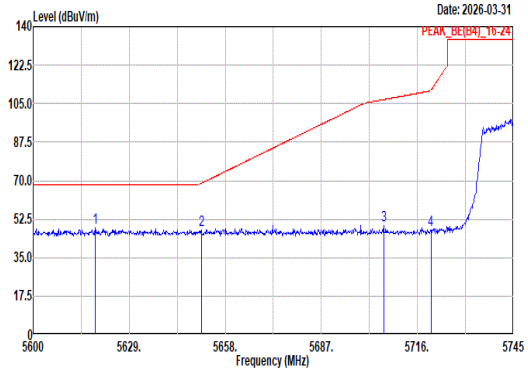 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5618.85 48.40 68.20 -19.80 35.33 34.94 13.20 35.07 0.00 314 265 Peak 2 5650.75 47.60 68.76 -21.16 34.44 35.00 13.23 35.07 0.00 314 265 Peak 3 5705.85 49.72 106.84 -57.12 36.41 35.10 13.28 35.07 0.00 314 265 Peak 4 5720.06 47.77 110.94 -63.17 34.45 35.10 13.29 35.07 0.00 314 265 Peak	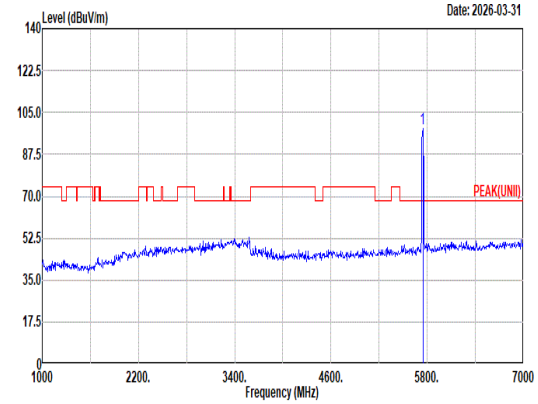 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5745.00 98.35 ------ ------ 85.01 35.10 13.31 35.07 0.00 314 265 Peak
Avg	Blank	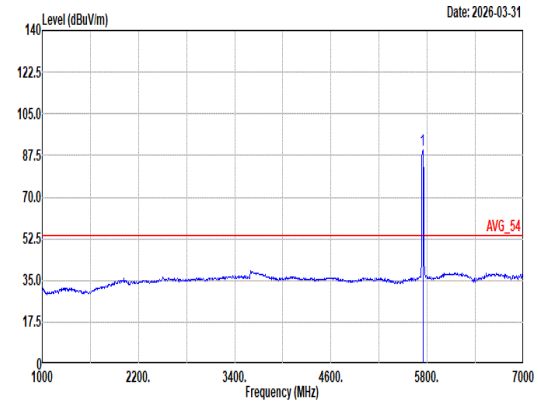 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5745.00 89.81 ------ ------ 76.47 35.10 13.31 35.07 0.00 314 265 Average

Mode	61	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	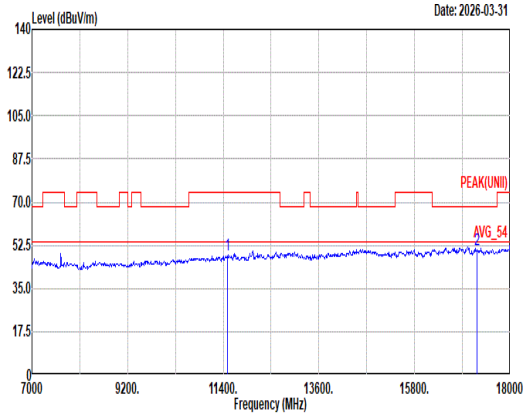 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 48.57 74.00 -25.43 47.32 38.48 18.72 57.27 1.32 -- -- Peak 2 17235.00 50.46 68.20 -17.74 40.64 41.87 22.57 56.05 1.43 -- -- Peak	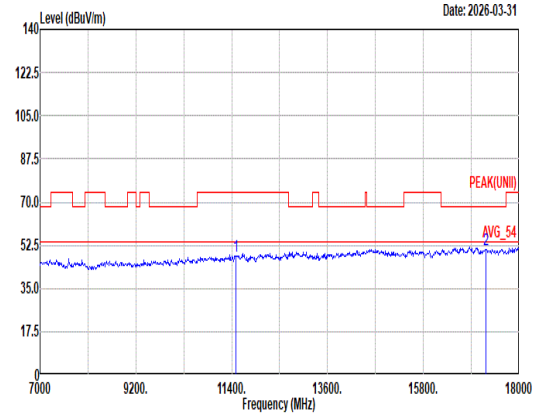 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 48.16 74.00 -25.84 46.91 38.48 18.72 57.27 1.32 -- -- Peak 2 17235.00 50.90 68.20 -17.30 41.08 41.87 22.57 56.05 1.43 -- -- Peak

Mode	61	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	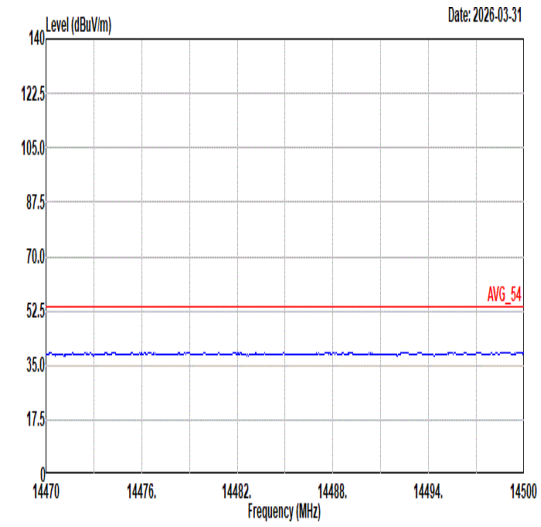 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	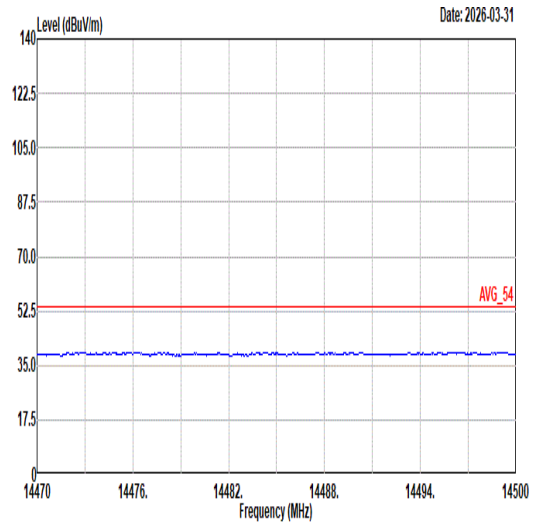 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	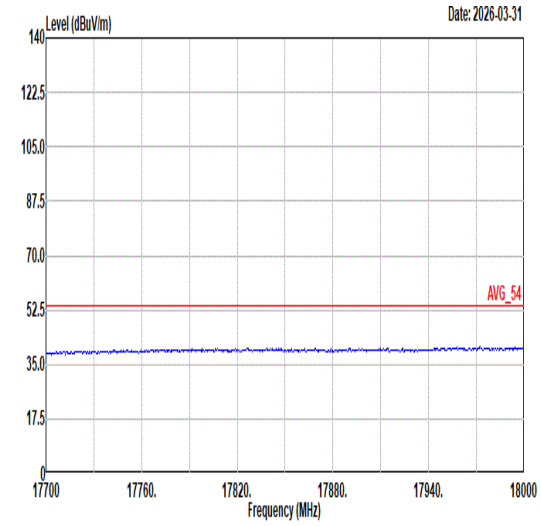 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	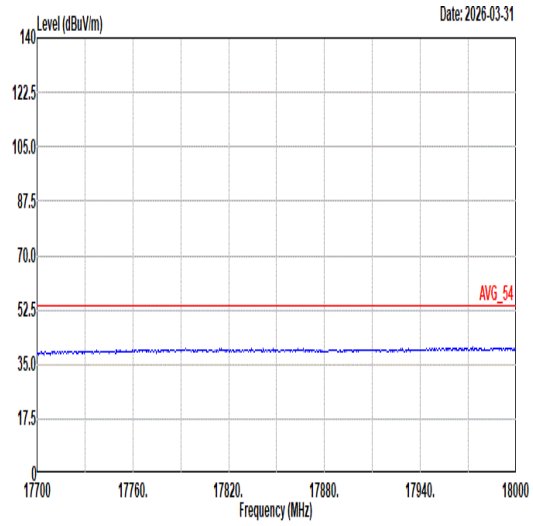 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	62
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	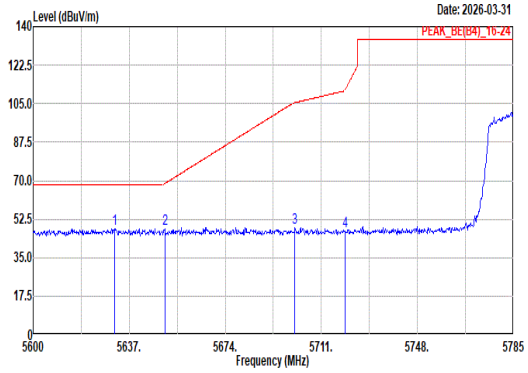 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5631.45 48.26 68.20 -19.94 35.16 34.96 13.21 35.07 0.00 188 360 Peak 2 5650.69 48.18 68.71 -20.53 35.02 35.00 13.23 35.07 0.00 188 360 Peak 3 5700.83 48.37 105.43 -57.06 35.07 35.10 13.27 35.07 0.00 188 360 Peak 4 5720.07 46.86 110.95 -64.09 33.54 35.10 13.29 35.07 0.00 188 360 Peak	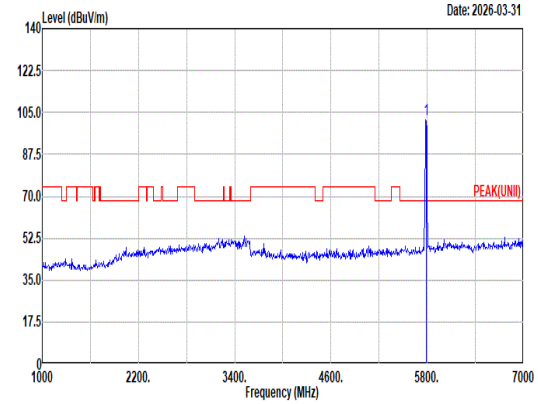 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 101.92 ------ ------ 88.48 35.16 13.34 35.06 0.00 188 360 Peak
Avg	Blank	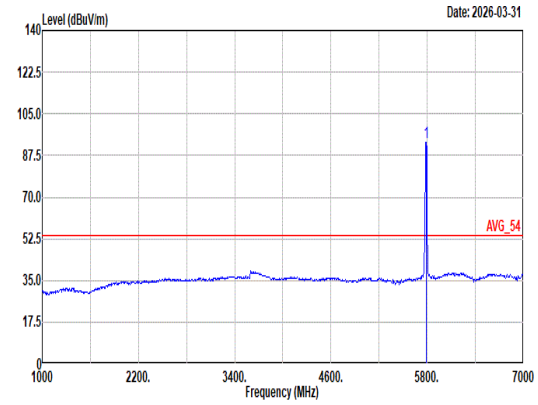 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 93.23 ------ ------ 79.79 35.16 13.34 35.06 0.00 188 360 Average

Mode	62	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	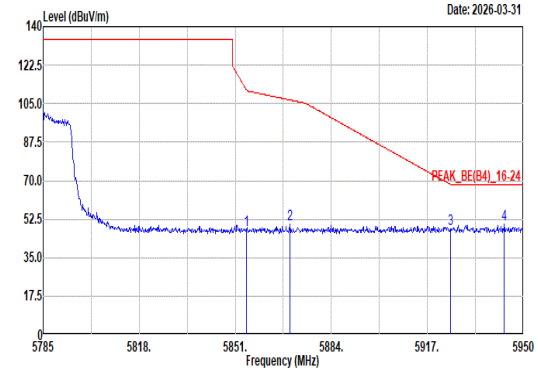 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.96 47.69 110.89 -63.20 34.12 35.22 13.41 35.06 0.00 188 360 Peak 2 5869.81 50.26 106.65 -56.39 36.62 35.28 13.42 35.06 0.00 188 360 Peak 3 5924.92 48.04 68.26 -20.22 34.17 35.45 13.47 35.05 0.00 188 360 Peak 4 5943.40 50.03 68.20 -18.17 36.10 35.49 13.49 35.05 0.00 188 360 Peak	Blank

Mode	62
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	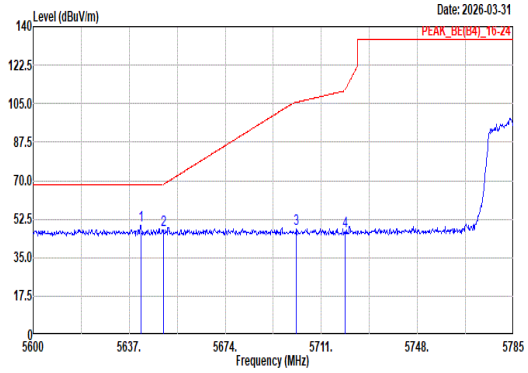 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5641.44 49.62 68.20 -18.58 36.49 34.98 13.22 35.07 0.00 300 248 Peak 2 5650.14 47.39 68.30 -20.91 34.23 35.00 13.23 35.07 0.00 300 248 Peak 3 5701.38 47.92 105.59 -57.67 34.62 35.10 13.27 35.07 0.00 300 248 Peak 4 5720.07 47.18 110.95 -63.77 33.86 35.10 13.29 35.07 0.00 300 248 Peak	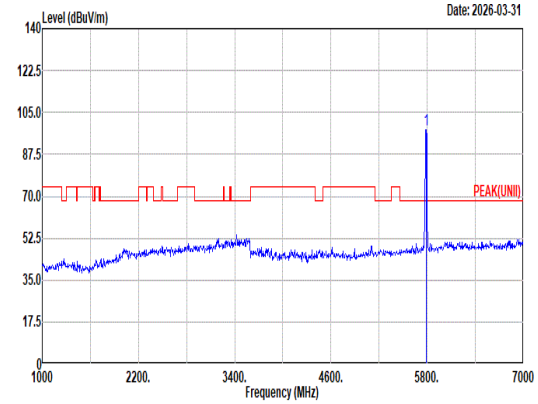 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 97.87 ------ ------ 84.40 35.18 13.35 35.06 0.00 300 248 Peak
Avg	Blank	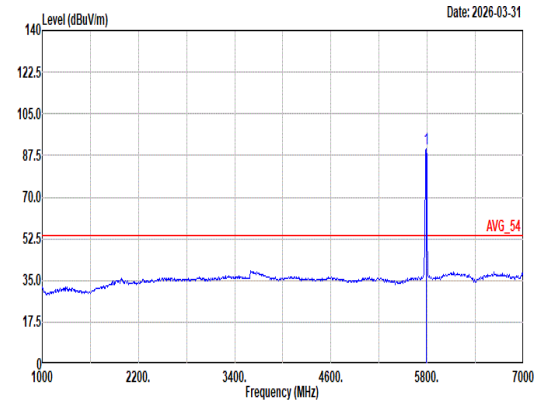 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 90.13 ------ ------ 76.66 35.18 13.35 35.06 0.00 300 248 Average

Mode	62	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	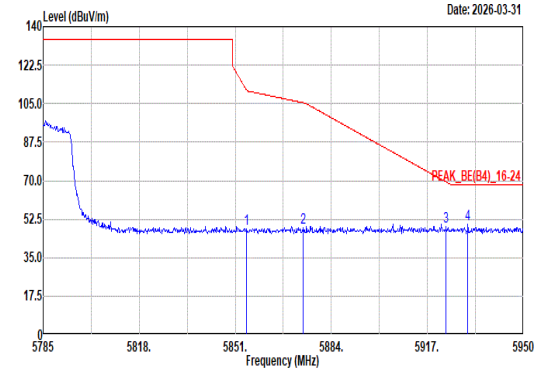 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.96 48.01 110.89 -62.88 34.44 35.22 13.41 35.06 0.00 300 248 Peak 2 5874.43 48.52 105.36 -56.84 34.85 35.30 13.43 35.06 0.00 300 248 Peak 3 5923.44 49.31 69.35 -20.04 35.44 35.45 13.47 35.05 0.00 300 248 Peak 4 5930.86 49.98 68.20 -18.22 36.09 35.46 13.48 35.05 0.00 300 248 Peak	Blank

Mode	62	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	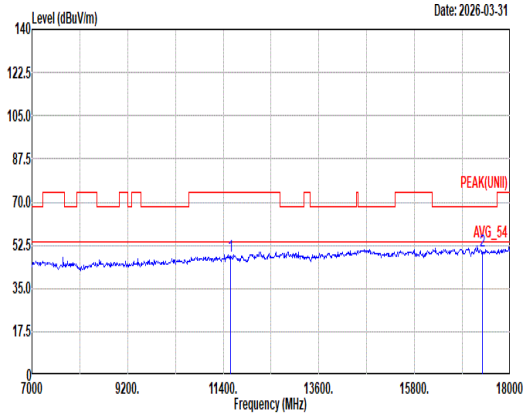 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 48.28 74.00 -25.72 46.63 38.64 18.80 57.12 1.33 -- -- Peak 2 17355.00 50.19 68.20 -18.01 40.78 41.53 22.62 56.19 1.45 -- -- Peak	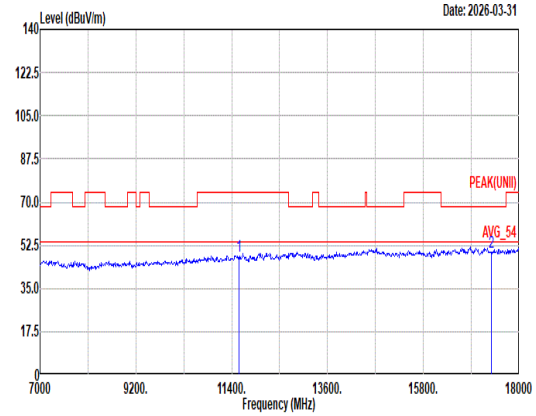 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 47.85 74.00 -26.15 46.20 38.64 18.80 57.12 1.33 -- -- Peak 2 17355.00 49.89 68.20 -18.31 40.48 41.53 22.62 56.19 1.45 -- -- Peak

Mode	62	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	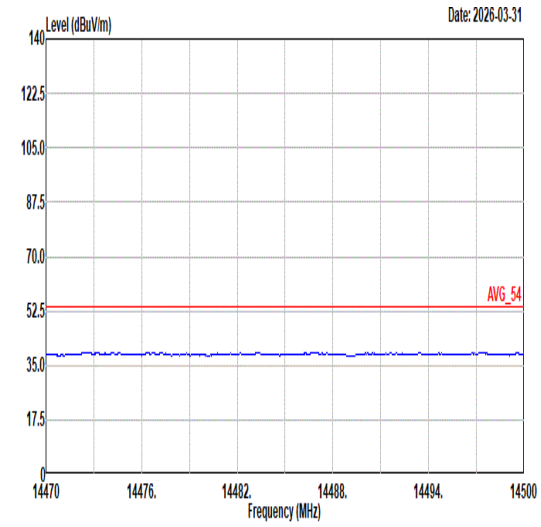 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	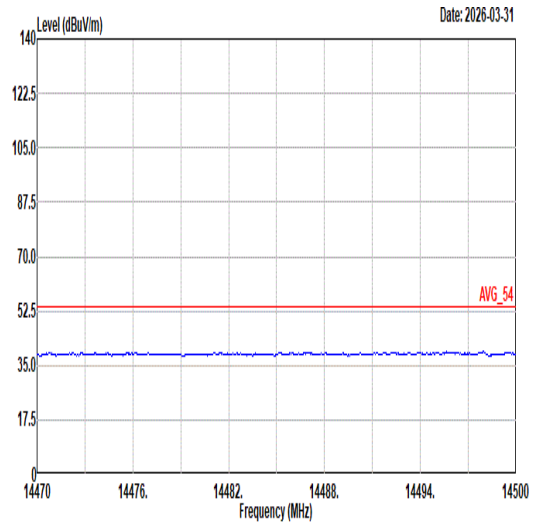 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	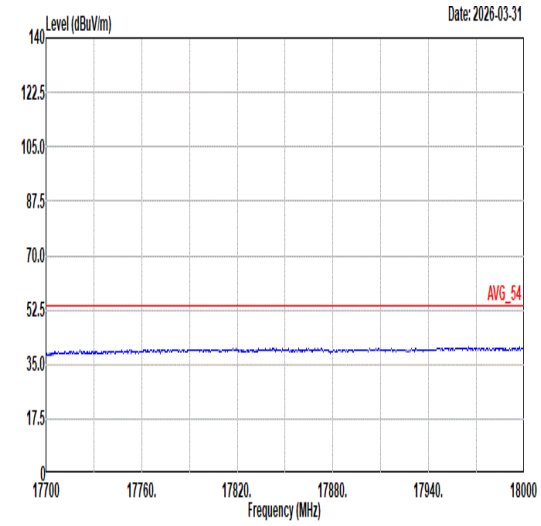 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	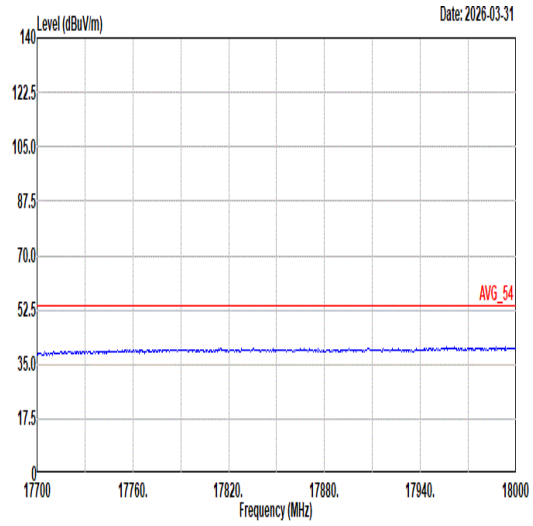 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	63	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	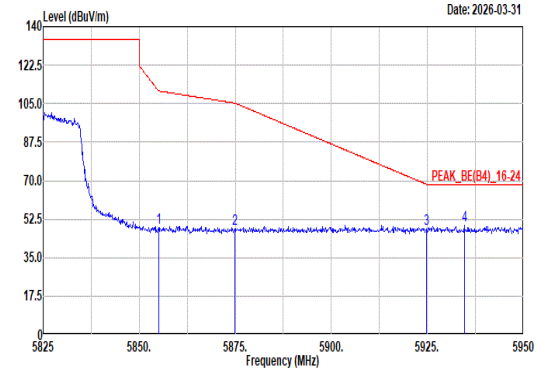 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 48.63 110.80 -62.17 35.06 35.22 13.41 35.06 0.00 210 0 Peak 2 5874.88 48.18 105.23 -57.05 34.51 35.30 13.43 35.06 0.00 210 0 Peak 3 5924.75 48.01 68.38 -20.37 34.14 35.45 13.47 35.05 0.00 210 0 Peak 4 5934.63 49.41 68.20 -18.79 35.51 35.47 13.48 35.05 0.00 210 0 Peak	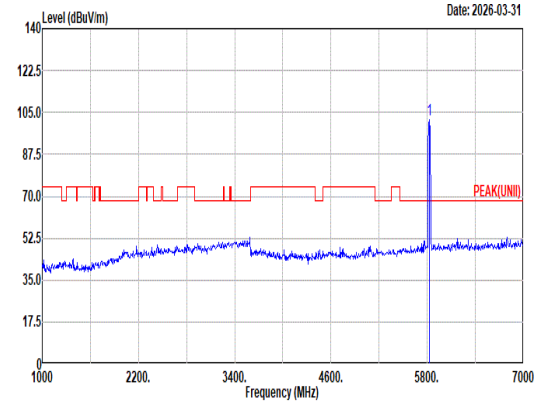 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 102.08 ------ ------ 88.56 35.20 13.38 35.06 0.00 210 0 Peak
Avg	Blank	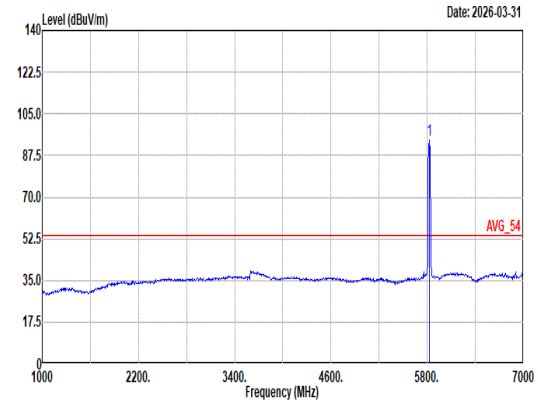 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 93.79 ------ ------ 80.27 35.20 13.38 35.06 0.00 210 0 Average

Mode	63	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	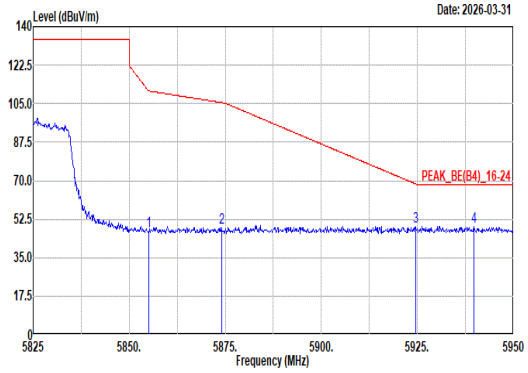 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5855.00 46.82 110.80 -63.98 33.25 35.22 13.41 35.06 0.00 308 264 Peak 2 5874.00 48.74 105.48 -56.74 35.07 35.30 13.43 35.06 0.00 308 264 Peak 3 5924.50 49.13 68.57 -19.44 35.26 35.45 13.47 35.05 0.00 308 264 Peak 4 5939.63 49.22 68.20 -18.98 35.30 35.48 13.49 35.05 0.00 308 264 Peak	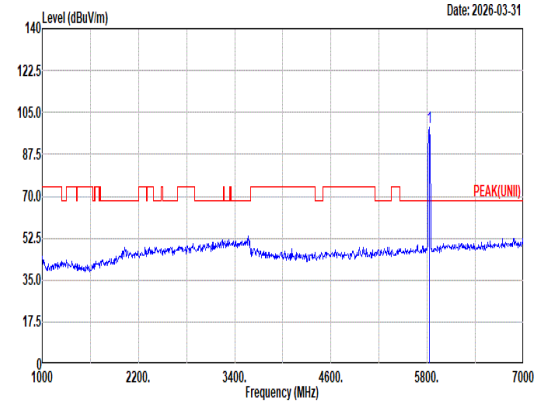 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5825.00 98.60 ------ ------ 85.08 35.20 13.38 35.06 0.00 308 264 Peak
Avg	Blank	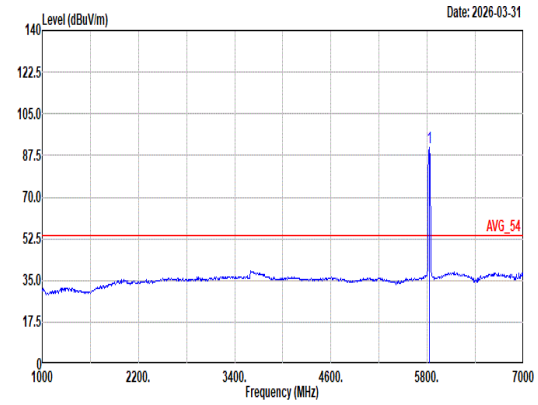 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5825.00 90.92 ------ ------ 77.40 35.20 13.38 35.06 0.00 308 264 Average

Mode	63	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	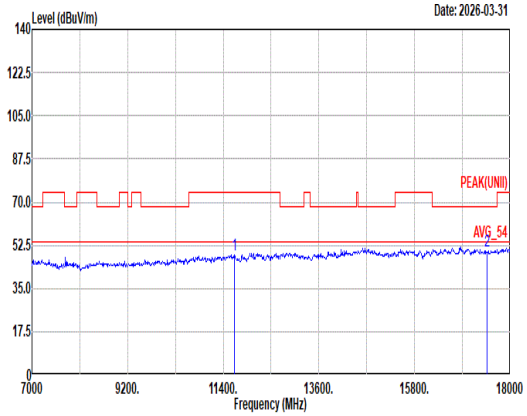 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 48.83 74.00 -25.17 46.96 38.60 18.88 56.96 1.35 -- -- Peak 2 17475.00 50.25 68.20 -17.95 40.65 41.80 22.67 56.34 1.47 -- -- Peak	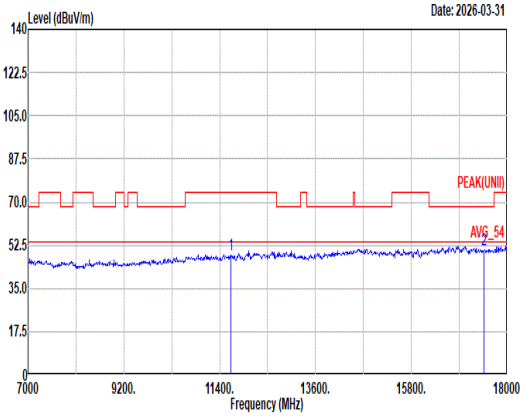 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 48.69 74.00 -25.31 46.82 38.60 18.88 56.96 1.35 -- -- Peak 2 17475.00 50.94 68.20 -17.26 41.34 41.80 22.67 56.34 1.47 -- -- Peak

Mode	63	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	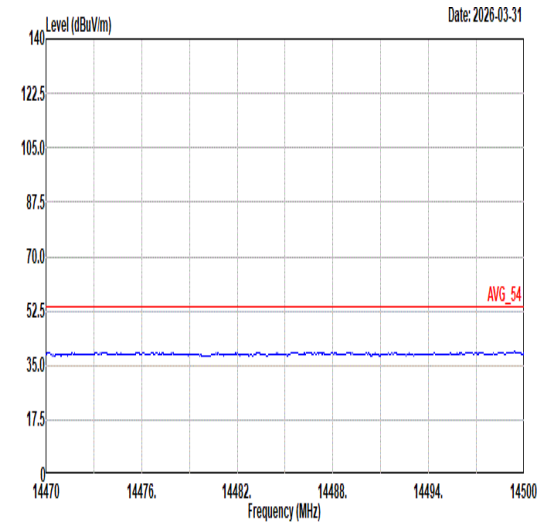 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	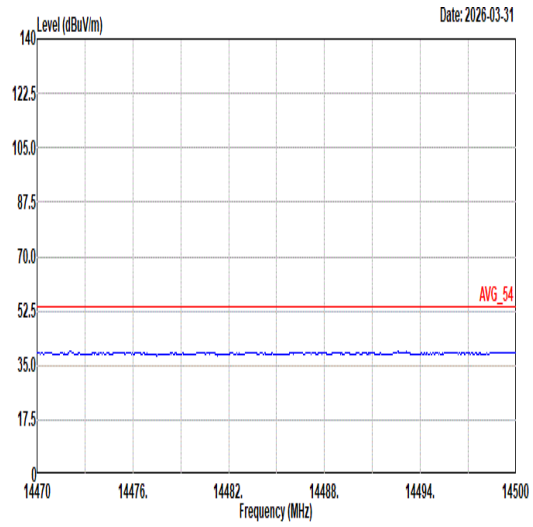 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	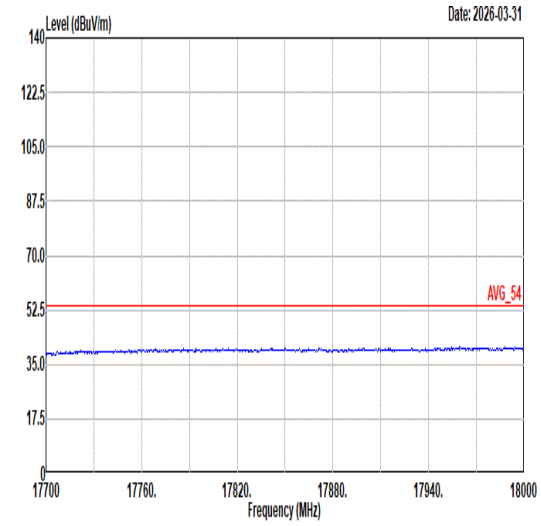 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	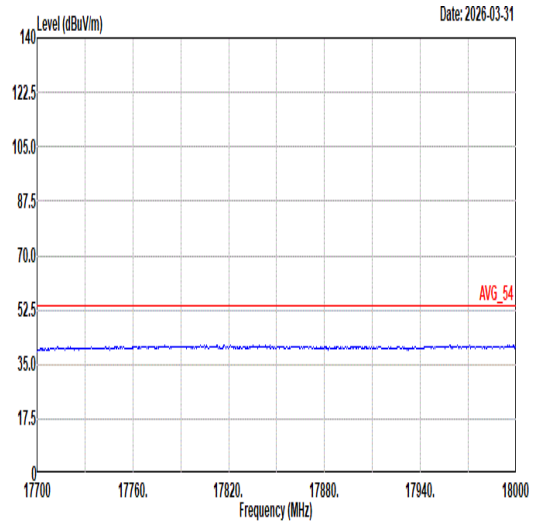 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	64
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	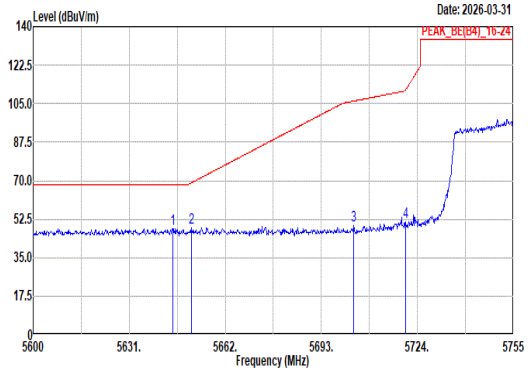 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5645.11 48.14 68.20 -20.06 35.00 34.99 13.22 35.07 0.00 220 0 Peak 2 5651.00 48.63 68.94 -20.31 35.47 35.00 13.23 35.07 0.00 220 0 Peak 3 5703.54 49.72 106.19 -56.47 36.42 35.10 13.27 35.07 0.00 220 0 Peak 4 5720.28 51.17 111.44 -60.27 37.85 35.10 13.29 35.07 0.00 220 0 Peak	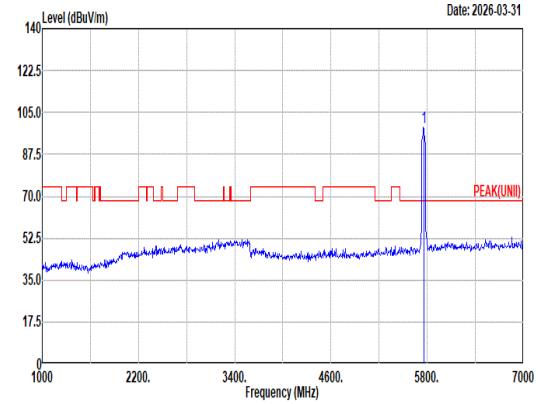 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 98.89 ------ ------ 85.53 35.10 13.32 35.06 0.00 220 0 Peak
Avg	Blank	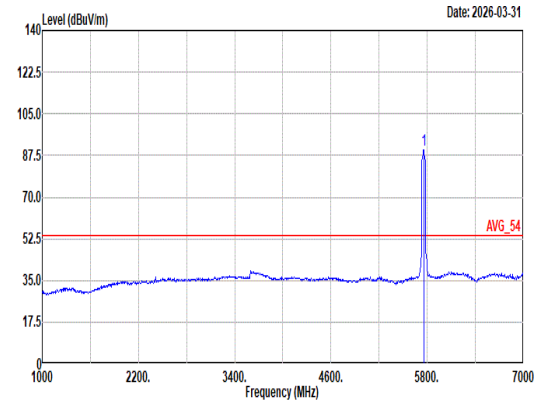 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 89.92 ------ ------ 76.54 35.12 13.32 35.06 0.00 220 0 Average

Mode	64	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	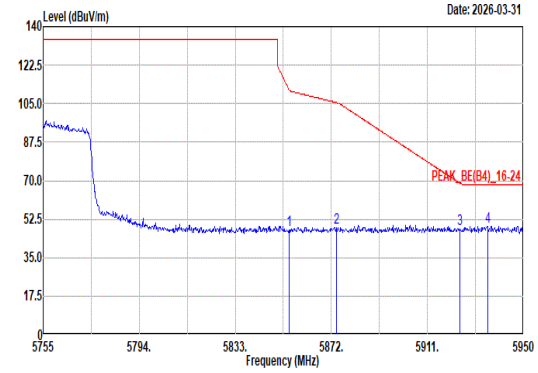 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 47.35 111.16 -63.81 33.78 35.22 13.41 35.06 0.00 220 0 Peak 2 5874.15 48.77 105.44 -56.67 35.10 35.30 13.43 35.06 0.00 220 0 Peak 3 5924.26 48.06 68.75 -20.69 34.19 35.45 13.47 35.05 0.00 220 0 Peak 4 5935.38 49.33 68.20 -18.87 35.43 35.47 13.48 35.05 0.00 220 0 Peak	Blank

Mode	64
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	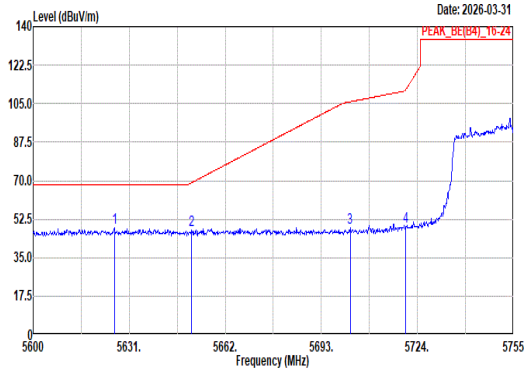 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5626.20 48.44 68.20 -19.76 35.36 34.95 13.20 35.07 0.00 328 263 Peak 2 5651.00 47.34 68.94 -21.60 34.18 35.00 13.23 35.07 0.00 328 263 Peak 3 5702.30 48.36 105.85 -57.49 35.06 35.10 13.27 35.07 0.00 328 263 Peak 4 5720.13 49.34 111.09 -61.75 36.02 35.10 13.29 35.07 0.00 328 263 Peak	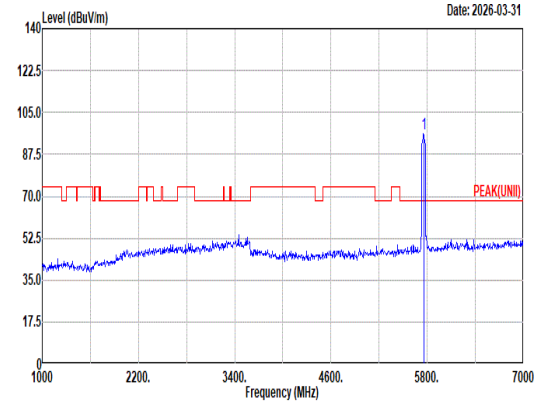 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 96.05 ------ ------ 82.69 35.10 13.32 35.06 0.00 328 263 Peak
Avg	Blank	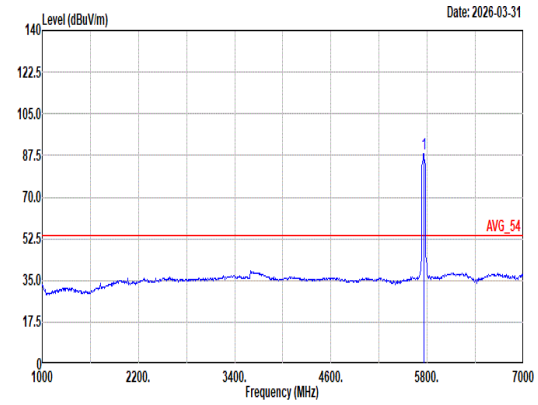 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 88.20 ------ ------ 74.82 35.12 13.32 35.06 0.00 328 263 Average

Mode	64	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	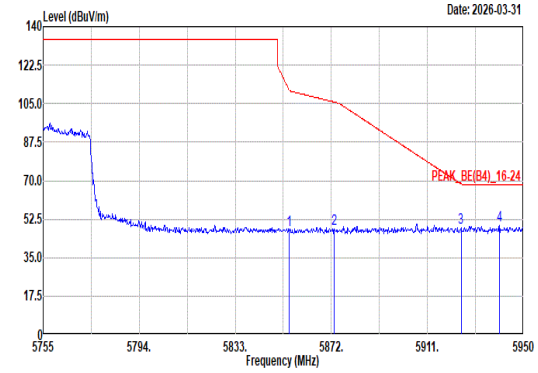 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 47.80 111.16 -63.36 34.23 35.22 13.41 35.06 0.00 328 263 Peak 2 5873.17 48.20 105.71 -57.51 34.54 35.29 13.43 35.06 0.00 328 263 Peak 3 5924.65 48.43 68.46 -20.03 34.56 35.45 13.47 35.05 0.00 328 263 Peak 4 5940.25 49.52 68.20 -18.68 35.60 35.48 13.49 35.05 0.00 328 263 Peak	Blank

Mode	64	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	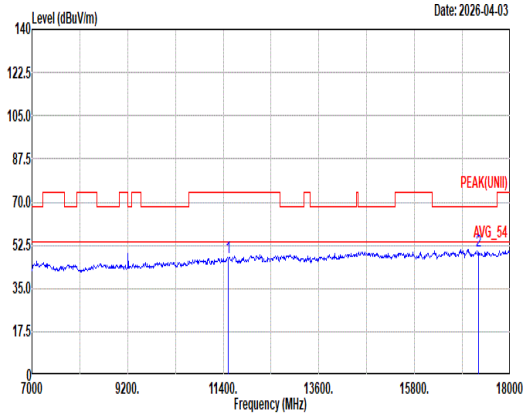 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 47.69 74.00 -26.31 46.34 38.52 18.74 57.23 1.32 -- -- Peak 2 17265.00 50.04 68.20 -18.16 40.20 41.90 22.58 56.08 1.44 -- -- Peak	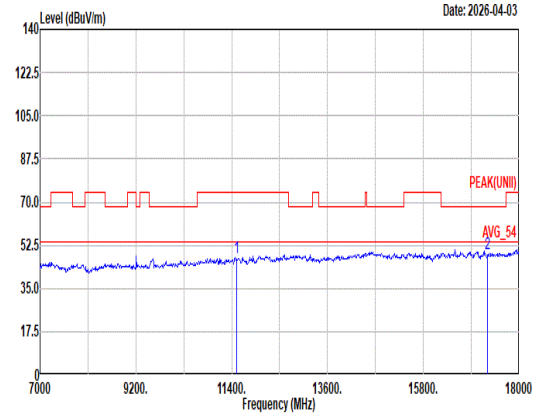 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 47.30 74.00 -26.70 45.95 38.52 18.74 57.23 1.32 -- -- Peak 2 17265.00 48.95 68.20 -19.25 39.11 41.90 22.58 56.08 1.44 -- -- Peak

Mode	64	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	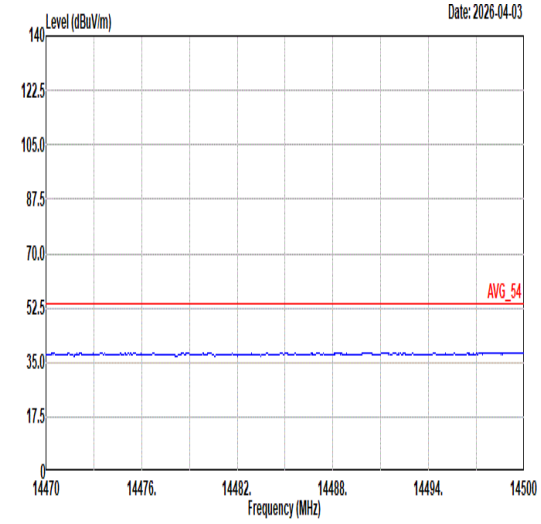 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	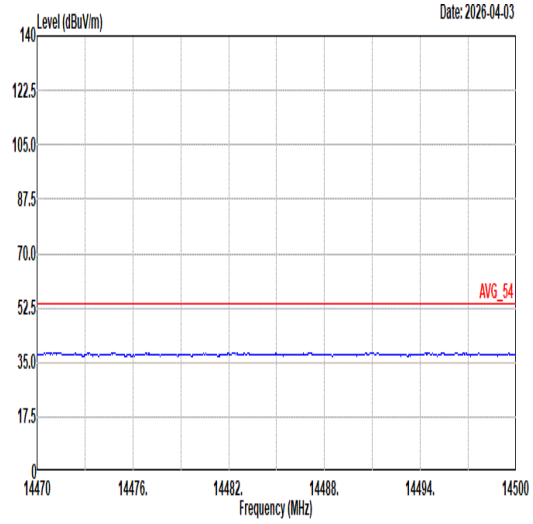 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	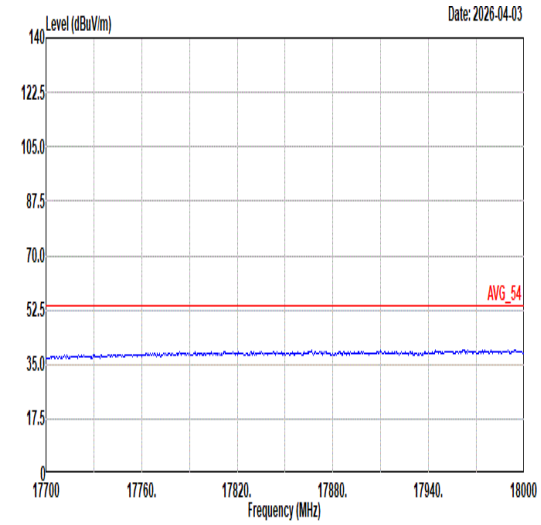 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	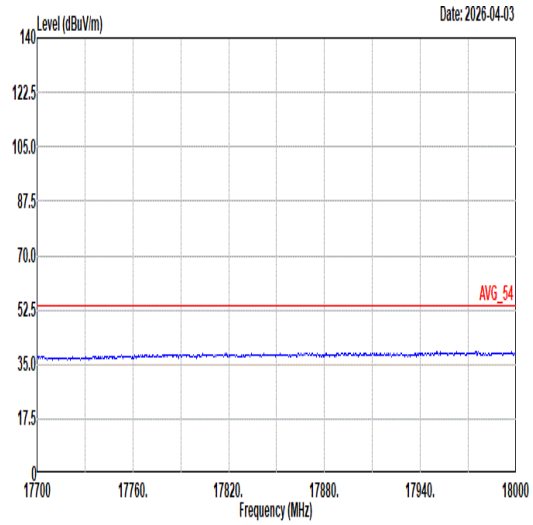 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	65
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	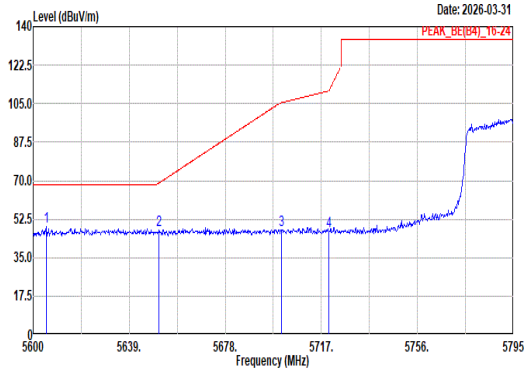 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5605.46 48.90 68.20 -19.30 35.88 34.91 13.18 35.07 0.00 205 0 Peak 2 5651.09 47.28 69.01 -21.73 34.12 35.00 13.23 35.07 0.00 205 0 Peak 3 5700.82 47.51 105.43 -57.92 34.21 35.10 13.27 35.07 0.00 205 0 Peak 4 5720.12 47.08 111.07 -63.99 33.76 35.10 13.29 35.07 0.00 205 0 Peak	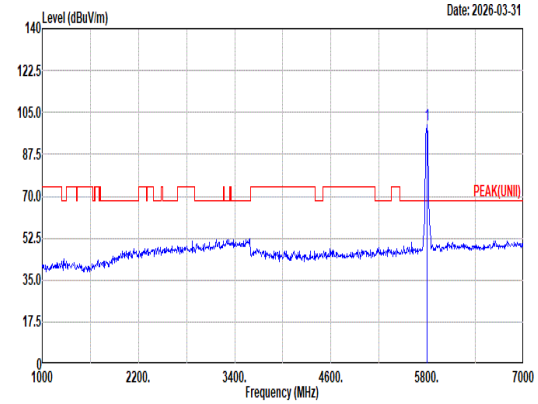 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 99.84 ------ ------ 86.36 35.19 13.35 35.06 0.00 205 0 Peak
Avg	Blank	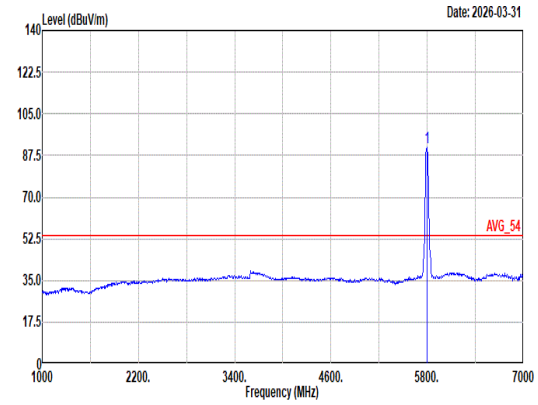 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 91.02 ------ ------ 77.54 35.19 13.35 35.06 0.00 205 0 Average

Mode	65	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	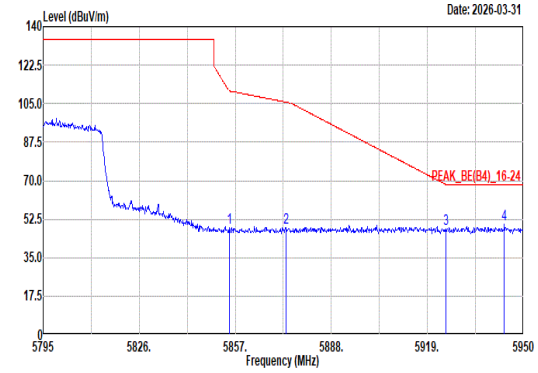 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.99 48.36 110.83 -62.47 34.79 35.22 13.41 35.06 0.00 205 0 Peak 2 5873.43 48.79 105.64 -56.85 35.13 35.29 13.43 35.06 0.00 205 0 Peak 3 5924.89 48.06 68.28 -20.22 34.19 35.45 13.47 35.05 0.00 205 0 Peak 4 5943.80 50.08 68.20 -18.12 36.15 35.49 13.49 35.05 0.00 205 0 Peak	Blank

Mode	65
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	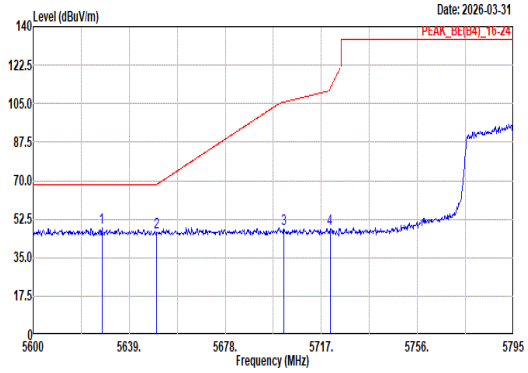 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5627.89 48.60 68.20 -19.60 35.50 34.96 13.21 35.07 0.00 308 261 Peak 2 5650.12 46.70 68.29 -21.59 33.54 35.00 13.23 35.07 0.00 308 261 Peak 3 5701.79 47.95 105.70 -57.75 34.65 35.10 13.27 35.07 0.00 308 261 Peak 4 5720.51 48.13 111.96 -63.83 34.81 35.10 13.29 35.07 0.00 308 261 Peak	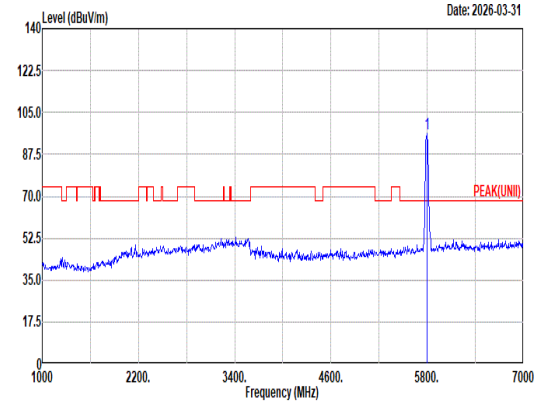 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 96.35 ------ ------ 82.87 35.19 13.35 35.06 0.00 308 261 Peak
Avg	Blank	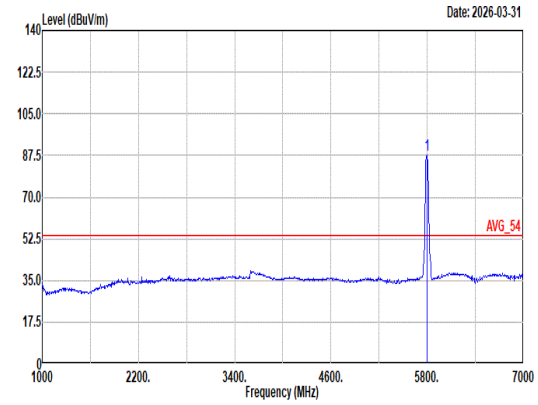 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 65 Setting : 9 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 87.66 ------ ------ 74.18 35.19 13.35 35.06 0.00 308 261 Average

Mode	65	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	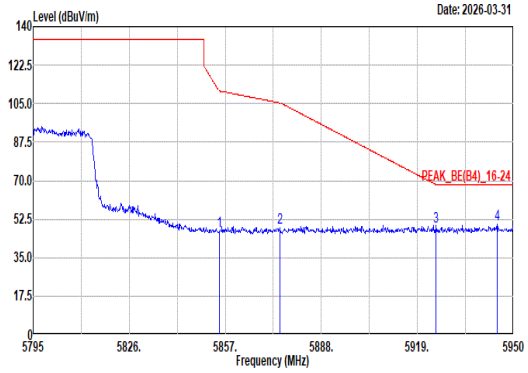 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 65 Setting : 9 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.99 47.11 110.83 -63.72 33.54 35.22 13.41 35.06 0.00 308 261 Peak 2 5874.67 48.41 105.29 -56.88 34.74 35.30 13.43 35.06 0.00 308 261 Peak 3 5924.89 49.22 68.28 -19.06 35.35 35.45 13.47 35.05 0.00 308 261 Peak 4 5944.73 50.26 68.20 -17.94 36.33 35.49 13.49 35.05 0.00 308 261 Peak	Blank

Mode	65	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	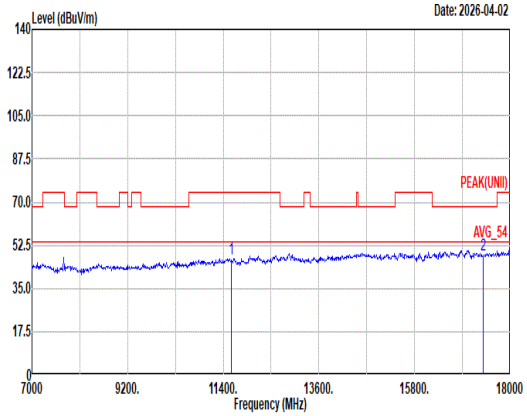 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 47.00 74.00 -27.00 45.24 38.68 18.82 57.08 1.34 -- -- Peak 2 17385.00 48.49 68.20 -19.71 38.92 41.71 22.63 56.23 1.46 -- -- Peak	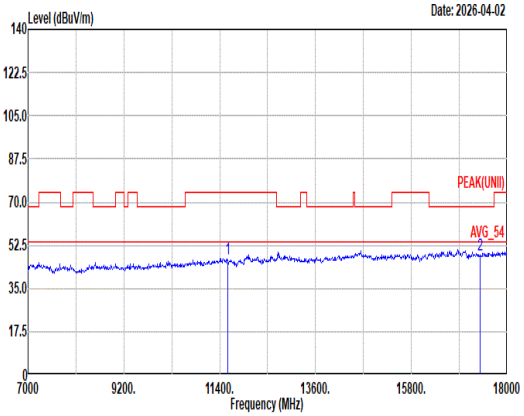 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 47.08 74.00 -26.92 45.32 38.68 18.82 57.08 1.34 -- -- Peak 2 17385.00 48.44 68.20 -19.76 38.87 41.71 22.63 56.23 1.46 -- -- Peak

Mode	65	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	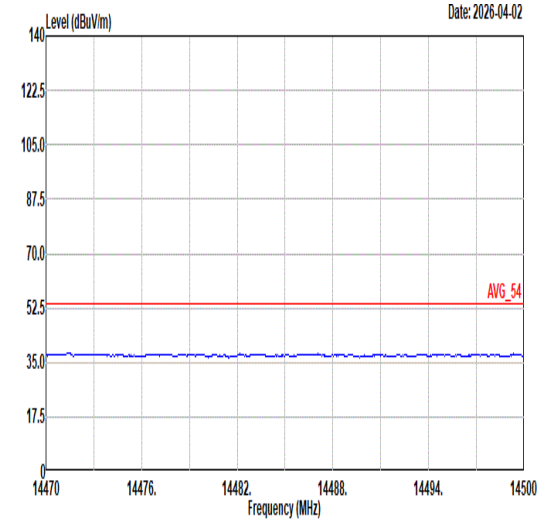 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	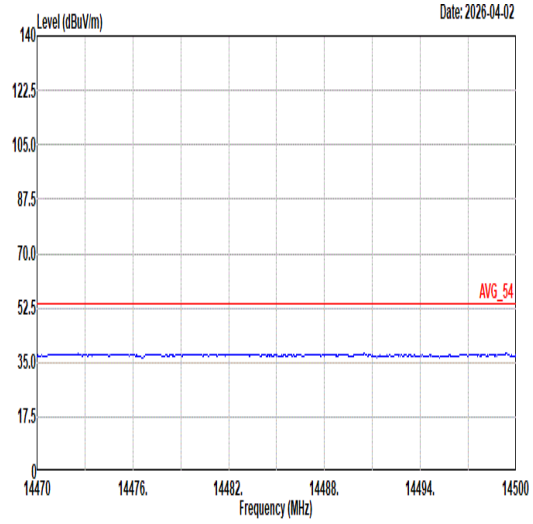 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	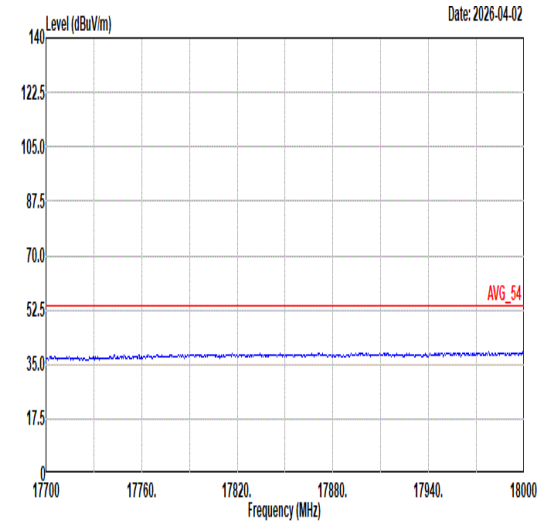 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	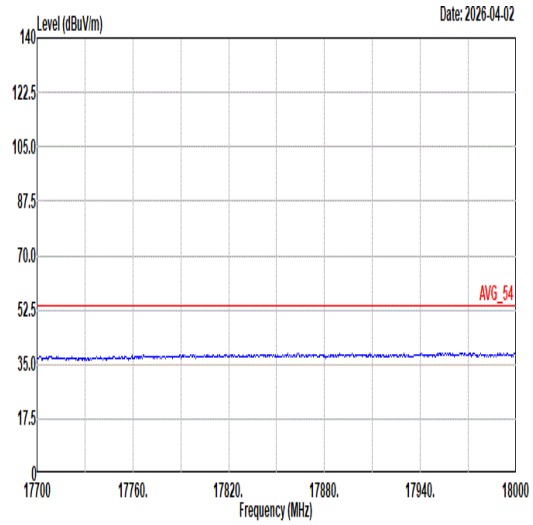 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	66
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	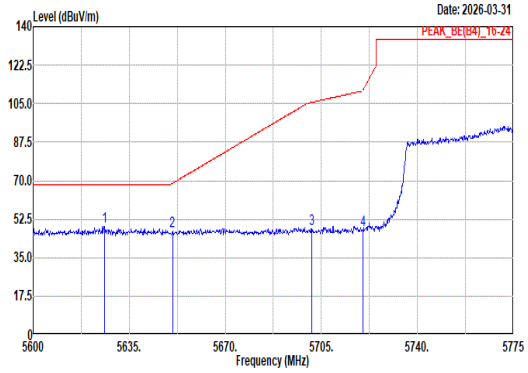 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5625.90 49.26 68.20 -18.94 36.18 34.95 13.20 35.07 0.00 187 0 Peak 2 5650.75 47.12 68.76 -21.64 33.96 35.00 13.23 35.07 0.00 187 0 Peak 3 5701.50 48.27 105.62 -57.35 34.97 35.10 13.27 35.07 0.00 187 0 Peak 4 5720.05 47.73 110.91 -63.18 34.41 35.10 13.29 35.07 0.00 187 0 Peak	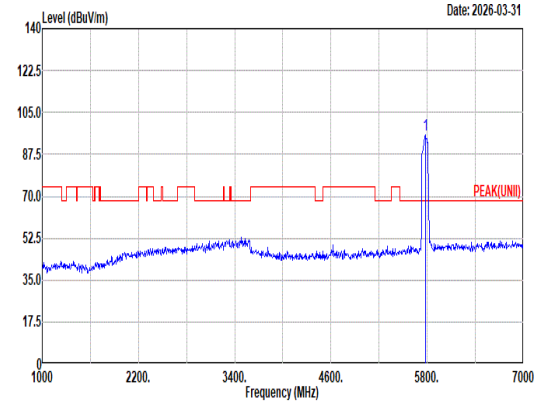 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 95.82 ------ ------ 82.39 35.15 13.34 35.06 0.00 187 0 Peak
Avg	Blank	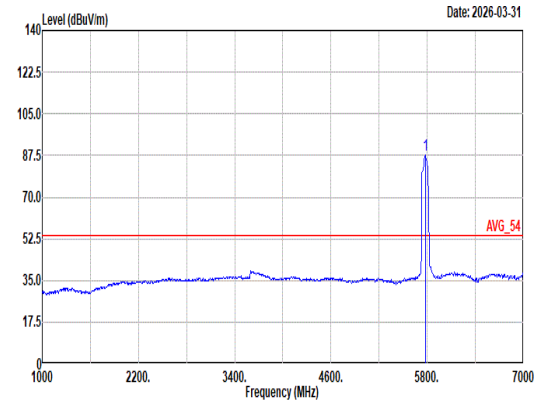 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 87.55 ------ ------ 74.12 35.15 13.34 35.06 0.00 187 0 Average

Mode	66	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	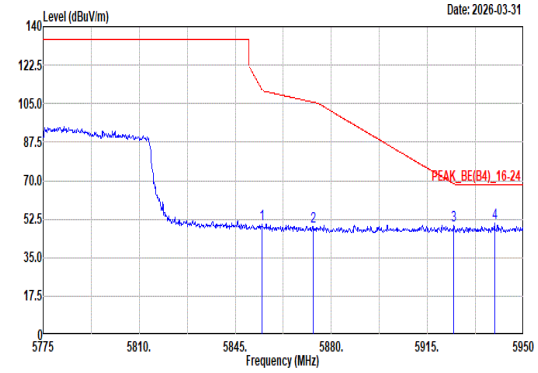 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 50.01 111.26 -61.25 36.44 35.22 13.41 35.06 0.00 187 0 Peak 2 5873.53 49.19 105.61 -56.42 35.53 35.29 13.43 35.06 0.00 187 0 Peak 3 5924.63 49.49 68.48 -18.99 35.62 35.45 13.47 35.05 0.00 187 0 Peak 4 5939.50 50.85 68.20 -17.35 36.93 35.48 13.49 35.05 0.00 187 0 Peak	Blank

Mode	66
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	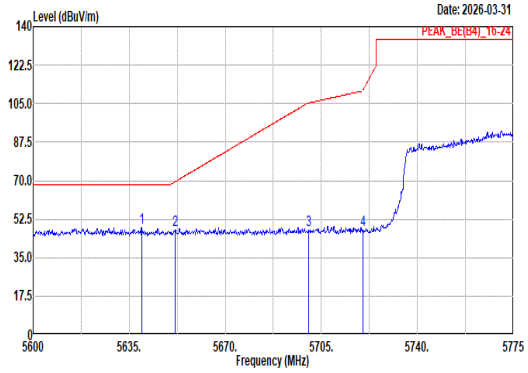 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5639.55 48.63 68.20 -19.57 35.50 34.98 13.22 35.07 0.00 323 264 Peak 2 5651.63 47.71 69.41 -21.70 34.55 35.00 13.23 35.07 0.00 323 264 Peak 3 5700.28 47.55 105.28 -57.73 34.25 35.10 13.27 35.07 0.00 323 264 Peak 4 5720.05 47.44 110.91 -63.47 34.12 35.10 13.29 35.07 0.00 323 264 Peak	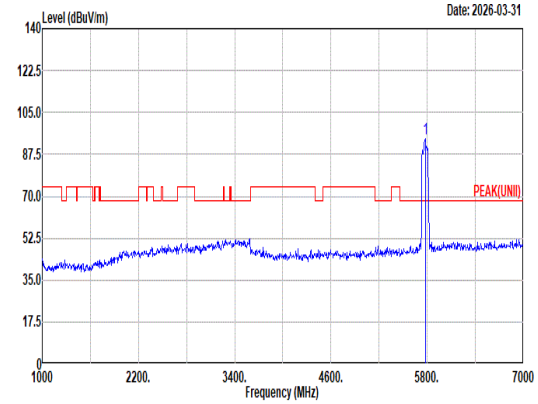 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 94.11 ------ ------ 80.68 35.15 13.34 35.06 0.00 323 264 Peak
Avg	Blank	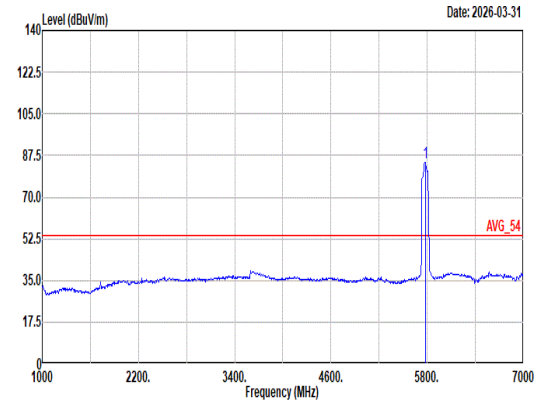 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 84.74 ------ ------ 71.31 35.15 13.34 35.06 0.00 323 264 Average

Mode	66	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	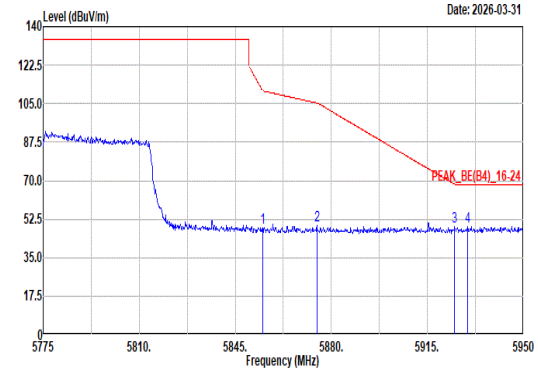 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 48.37 110.86 -62.49 34.80 35.22 13.41 35.06 0.00 323 264 Peak 2 5874.75 49.44 105.27 -55.83 35.77 35.30 13.43 35.06 0.00 323 264 Peak 3 5924.98 49.15 68.22 -19.07 35.28 35.45 13.47 35.05 0.00 323 264 Peak 4 5929.70 49.12 68.20 -19.08 35.23 35.46 13.48 35.05 0.00 323 264 Peak	Blank

Mode	66	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	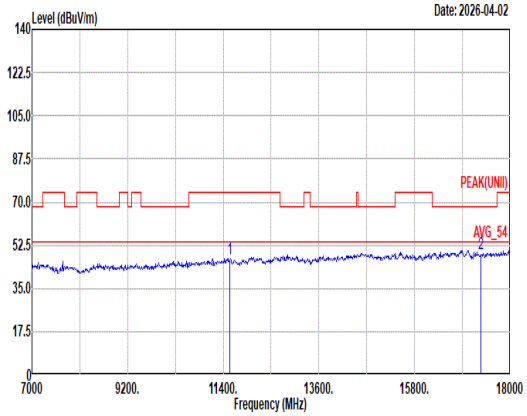 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 47.16 74.00 -26.84 45.60 38.60 18.78 57.15 1.33 -- -- Peak 2 17325.00 49.35 68.20 -18.85 39.75 41.70 22.61 56.16 1.45 -- -- Peak	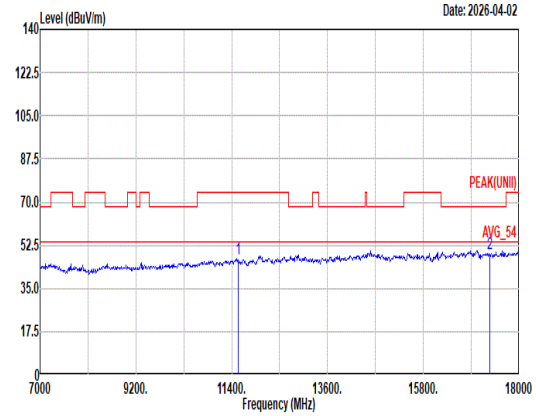 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 46.78 74.00 -27.22 45.22 38.60 18.78 57.15 1.33 -- -- Peak 2 17325.00 49.11 68.20 -19.09 39.51 41.70 22.61 56.16 1.45 -- -- Peak

Mode	66	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	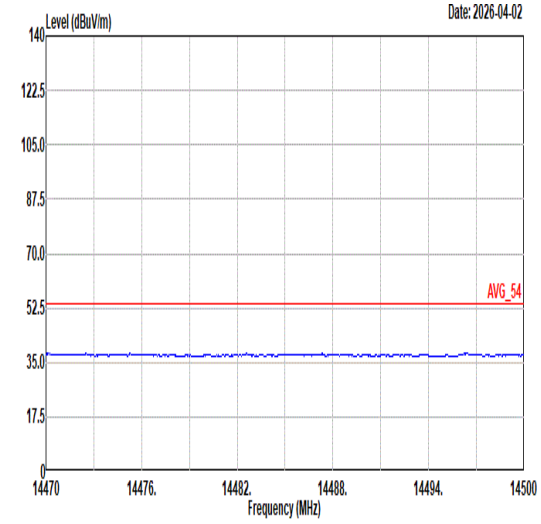 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	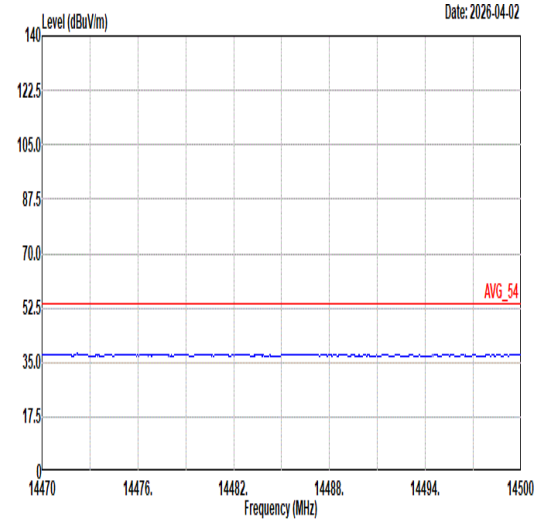 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	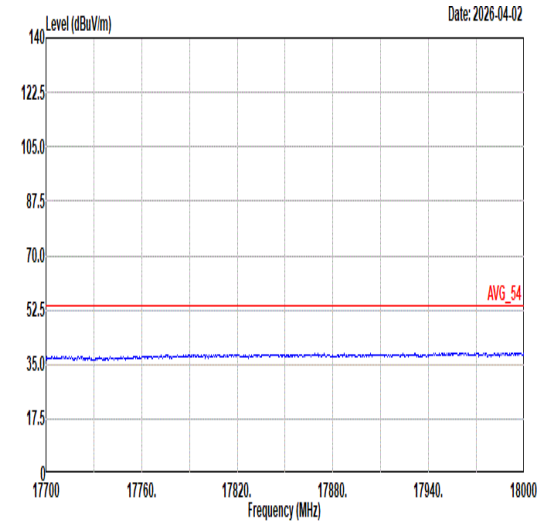 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	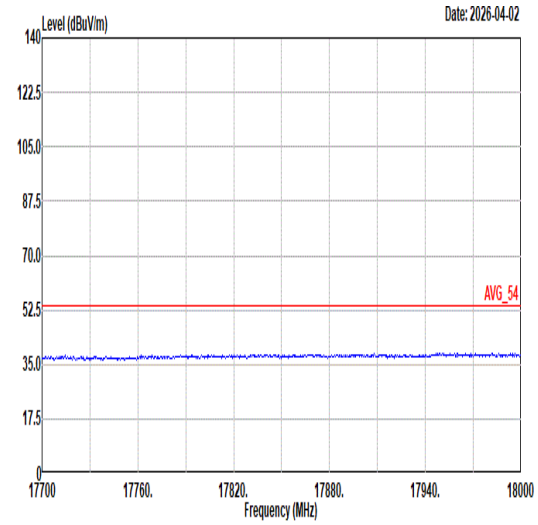 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	67	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	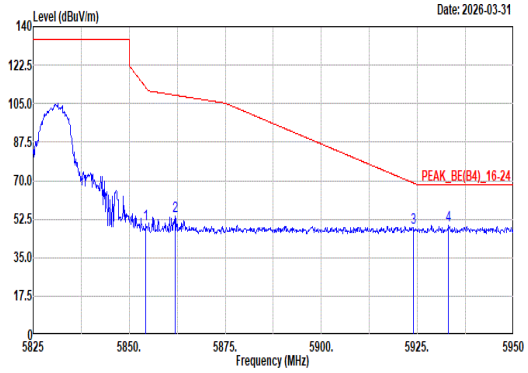 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.38 50.27 112.22 -61.95 36.70 35.22 13.41 35.06 0.00 196 353 Peak 2 5862.00 54.05 108.84 -54.79 40.44 35.25 13.42 35.06 0.00 196 353 Peak 3 5923.88 48.81 69.03 -20.22 34.94 35.45 13.47 35.05 0.00 196 353 Peak 4 5933.13 49.59 68.20 -18.61 35.69 35.47 13.48 35.05 0.00 196 353 Peak	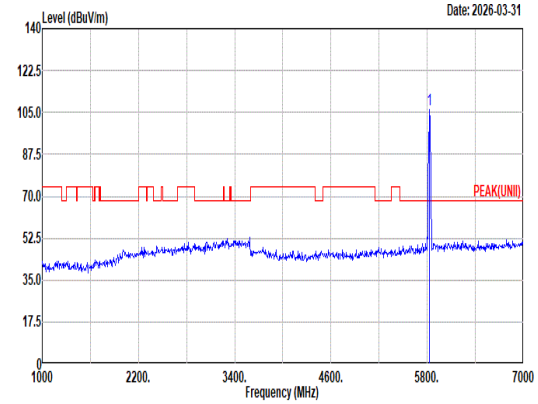 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 106.06 ------ ------ 92.53 35.20 13.39 35.06 0.00 196 353 Peak
Avg	Blank	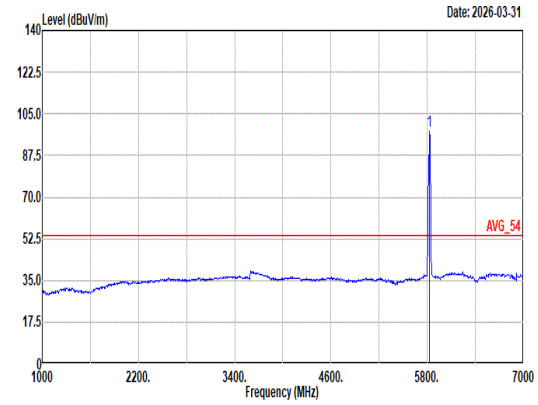 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 97.58 ------ ------ 84.05 35.20 13.39 35.06 0.00 196 353 Average

Mode	67	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	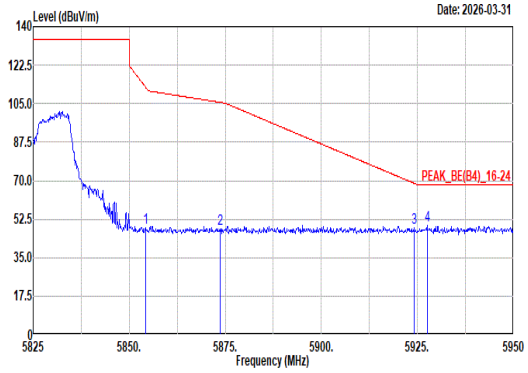 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 67 Setting : 9 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.38 48.43 112.22 -63.79 34.86 35.22 13.41 35.06 0.00 291 262 Peak 2 5873.75 48.19 105.55 -57.36 34.52 35.30 13.43 35.06 0.00 291 262 Peak 3 5924.13 48.86 68.84 -19.98 34.99 35.45 13.47 35.05 0.00 291 262 Peak 4 5927.50 49.90 68.20 -18.30 36.02 35.46 13.47 35.05 0.00 291 262 Peak	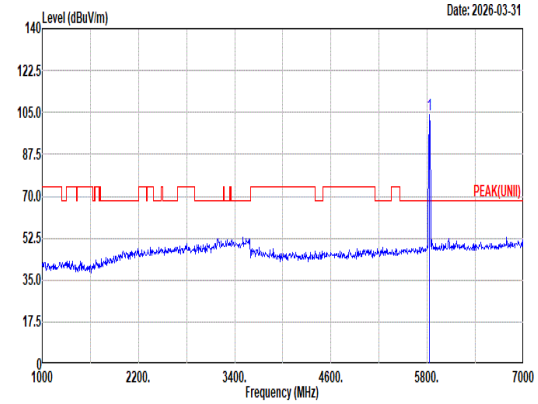 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 104.14 ------ ------ 90.61 35.20 13.39 35.06 0.00 291 262 Peak
Avg	Blank	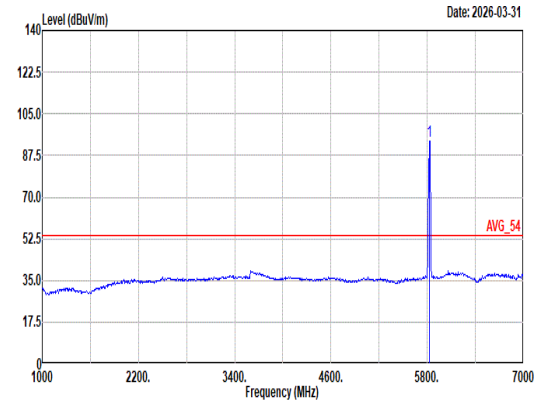 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 67 Setting : 9 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 93.48 ------ ------ 79.95 35.20 13.39 35.06 0.00 291 262 Average

Mode	67	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	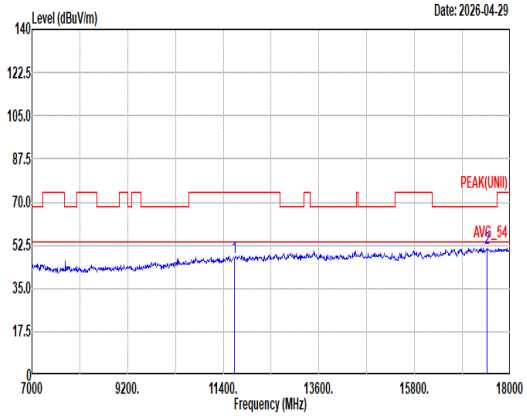 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 47.66 74.00 -26.34 45.51 38.60 18.88 56.68 1.35 -- -- Peak 2 17475.00 51.08 68.20 -17.12 40.98 41.80 22.67 55.84 1.47 -- -- Peak	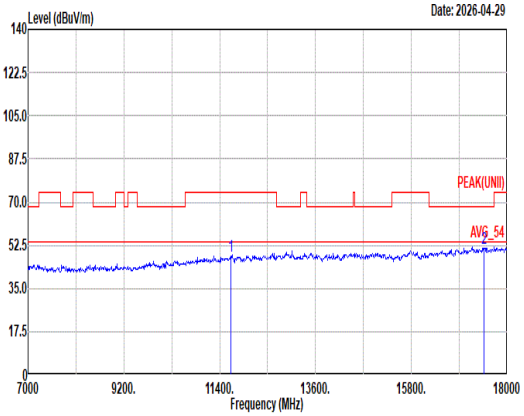 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 48.15 74.00 -25.85 46.00 38.60 18.88 56.68 1.35 -- -- Peak 2 17475.00 51.47 68.20 -16.73 41.37 41.80 22.67 55.84 1.47 -- -- Peak

Mode	67	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	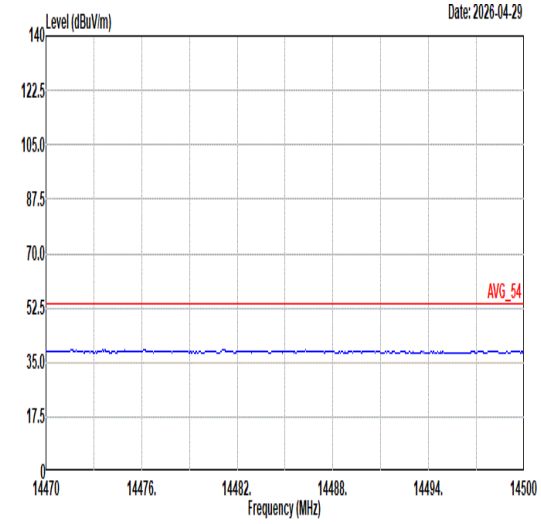 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	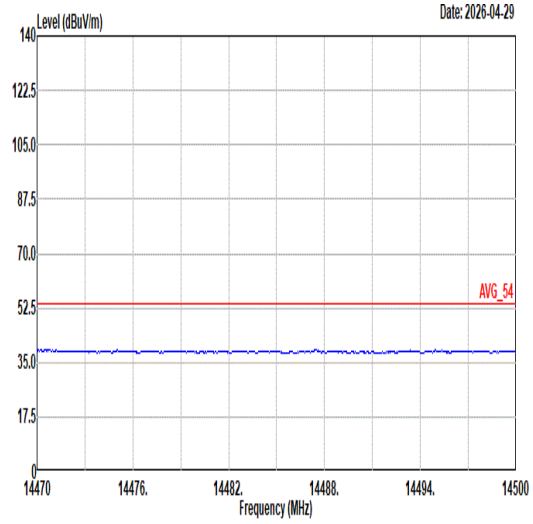 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	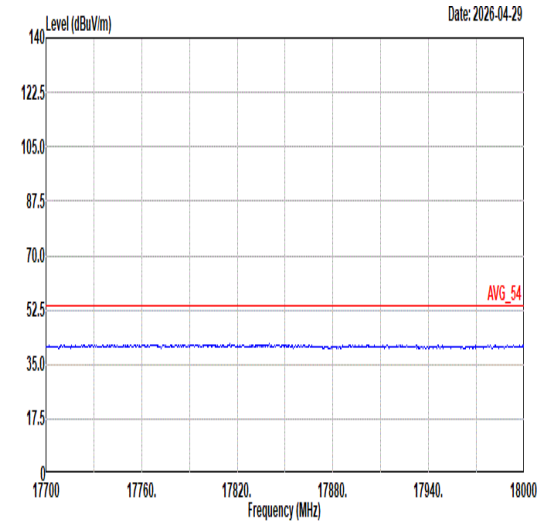 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	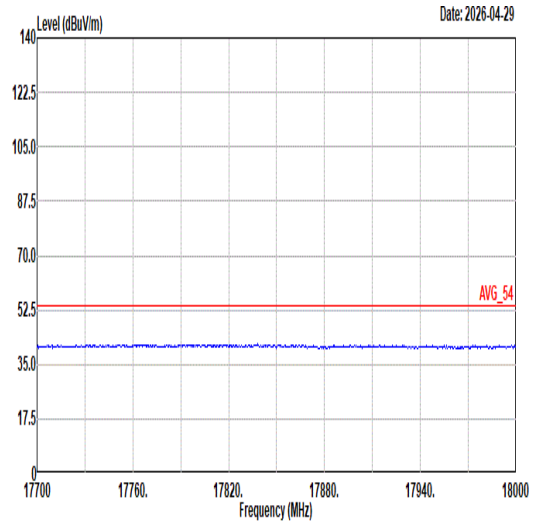 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	68
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	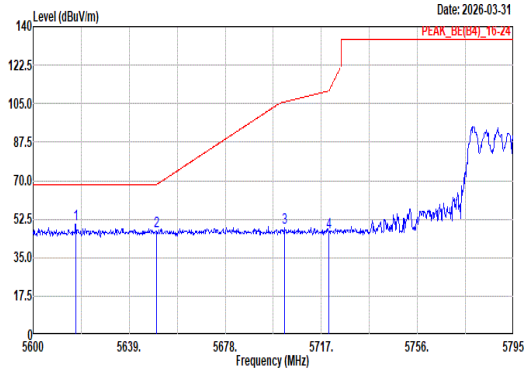 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5617.36 50.03 68.20 -18.17 36.97 34.93 13.20 35.07 0.00 229 0 Peak 2 5650.12 46.99 68.29 -21.30 33.83 35.00 13.23 35.07 0.00 229 0 Peak 3 5701.99 48.48 105.76 -57.28 35.18 35.10 13.27 35.07 0.00 229 0 Peak 4 5720.12 46.70 111.07 -64.37 33.38 35.10 13.29 35.07 0.00 229 0 Peak	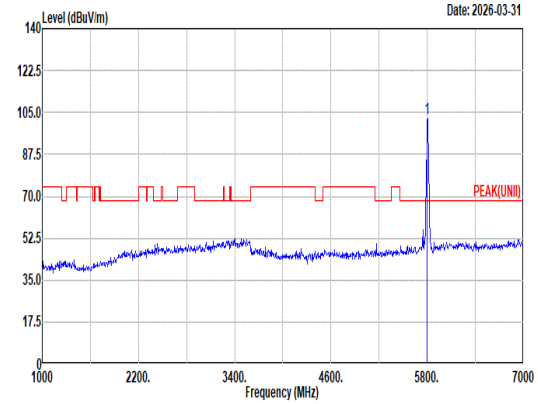 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 102.64 ------ ------ 89.13 35.20 13.37 35.06 0.00 229 0 Peak
Avg	Blank	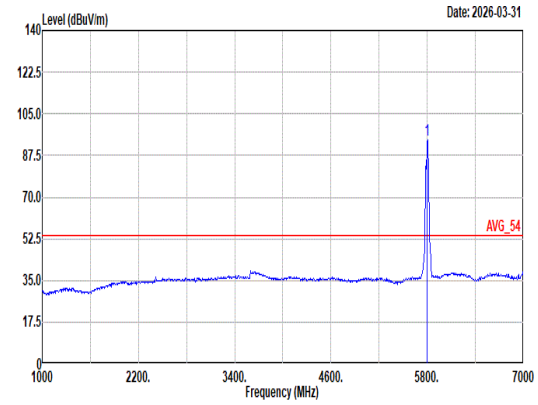 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 93.92 ------ ------ 80.41 35.20 13.37 35.06 0.00 229 0 Average

Mode	68	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	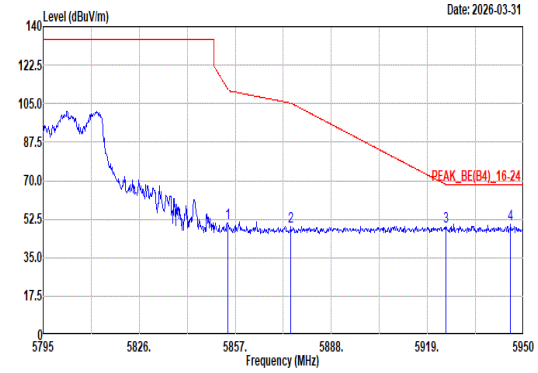 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.52 50.75 111.89 -61.14 37.18 35.22 13.41 35.06 0.00 229 0 Peak 2 5874.98 49.36 105.21 -55.85 35.69 35.30 13.43 35.06 0.00 229 0 Peak 3 5924.89 48.89 68.28 -19.39 35.02 35.45 13.47 35.05 0.00 229 0 Peak 4 5945.82 50.27 68.20 -17.93 36.34 35.49 13.49 35.05 0.00 229 0 Peak	Blank

Mode	68
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	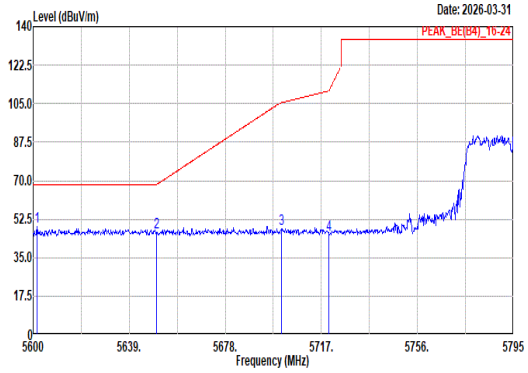 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5601.56 48.88 68.20 -19.32 35.87 34.90 13.18 35.07 0.00 295 263 Peak 2 5650.12 46.33 68.29 -21.96 33.17 35.00 13.23 35.07 0.00 295 263 Peak 3 5700.82 48.25 105.43 -57.18 34.95 35.10 13.27 35.07 0.00 295 263 Peak 4 5720.12 45.69 111.07 -65.38 32.37 35.10 13.29 35.07 0.00 295 263 Peak	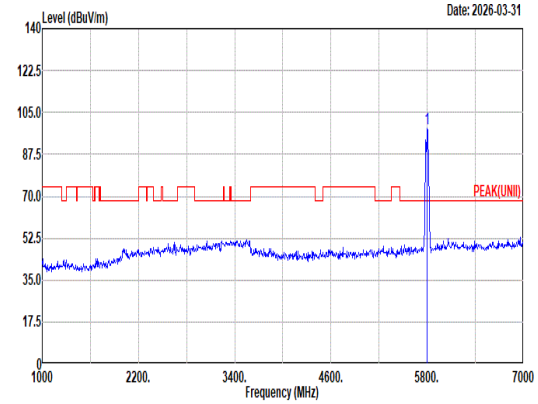 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 98.36 ------ ------ 84.86 35.20 13.36 35.06 0.00 295 263 Peak
Avg	Blank	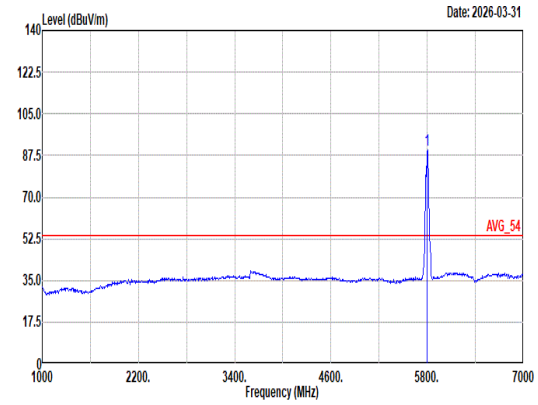 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 68 Setting : 9 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 89.83 ------ ------ 76.32 35.20 13.37 35.06 0.00 295 263 Average

Mode	68	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	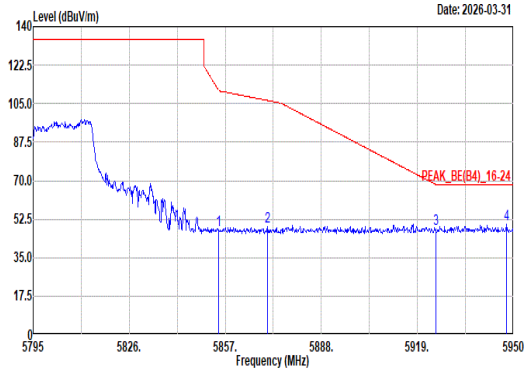 Site : 03CH07-HY Condition: PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 68 Setting : 9 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.83 47.44 111.19 -63.75 33.87 35.22 13.41 35.06 0.00 295 263 Peak 2 5870.64 49.34 106.42 -57.08 35.70 35.28 13.42 35.06 0.00 295 263 Peak 3 5924.89 48.24 68.28 -20.04 34.37 35.45 13.47 35.05 0.00 295 263 Peak 4 5947.68 50.22 68.20 -17.98 36.28 35.50 13.49 35.05 0.00 295 263 Peak	Blank

Mode	68	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	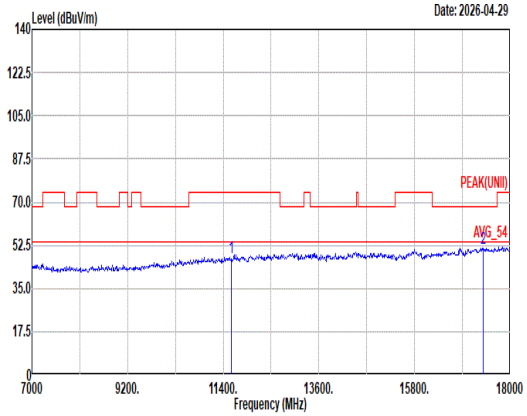 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 47.40 74.00 -26.60 45.33 38.68 18.82 56.77 1.34 -- -- Peak 2 17385.00 51.28 68.20 -16.92 41.37 41.71 22.63 55.89 1.46 -- -- Peak	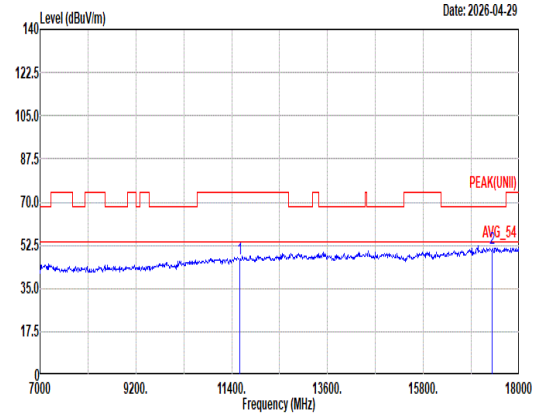 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 47.17 74.00 -26.83 45.10 38.68 18.82 56.77 1.34 -- -- Peak 2 17385.00 51.24 68.20 -16.96 41.33 41.71 22.63 55.89 1.46 -- -- Peak

Mode	68	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	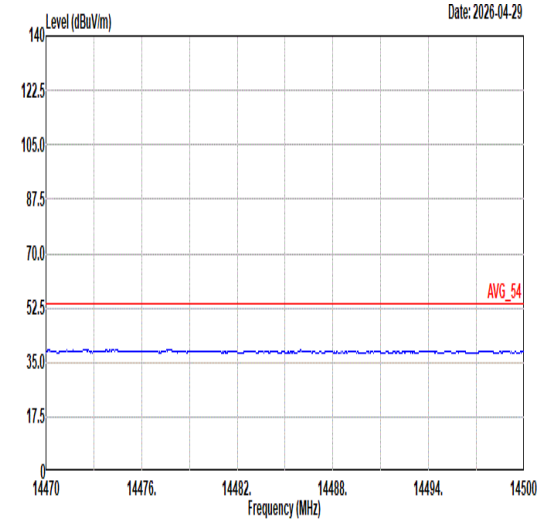 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	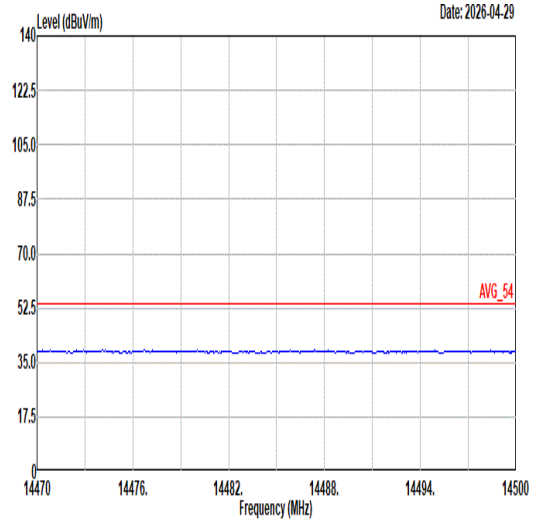 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	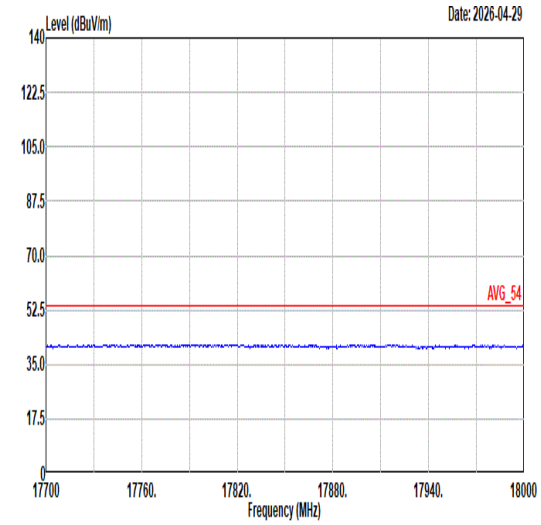 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	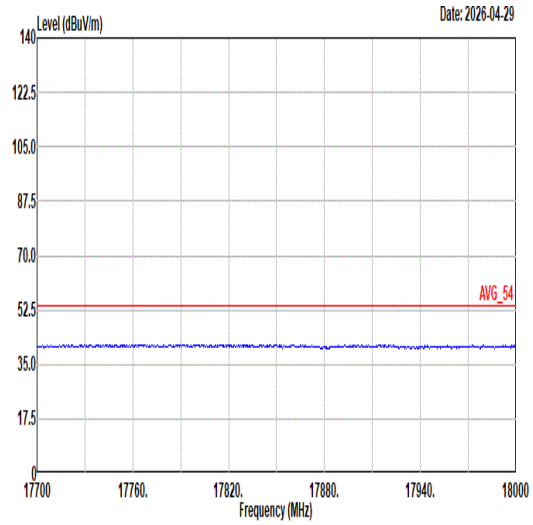 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL