FCC RADIO TEST REPORT

FCC ID	:	**PY7-84526Y**
Equipment	:	**GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac/ax, NFC and GNSS**
Brand Name	:	**Sony**
Applicant	:	**Sony Corporation 1-7-1 Konan, Minato-ku , Tokyo, Japan 108-0075**
Manufacturer	:	**Sony Corporation 1-7-1 Konan, Minato-ku , Tokyo, Japan 108-0075**
Standard	:	**FCC Part 15 Subpart E §15.407**

The product was received on Feb. 03, 2026 and testing was performed from Mar. 05, 2026 to May 22, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory
No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

Table of Contents

History of this test report **3**
Summary of Test Result **4**
1 General Description **5**
1.1 Product Feature of Equipment Under Test 5
1.2 Modification of EUT 7
1.3 Testing Location 7
1.4 Applicable Standards 7
2 Test Configuration of Equipment Under Test **8**
2.1 Carrier Frequency and Channel 8
2.2 Test Mode 9
2.3 Connection Diagram of Test System 10
2.4 Support Unit used in test configuration and system 10
2.5 EUT Operation Test Setup 11
2.6 Measurement Results Explanation Example 11
3 Test Result **12**
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 12
3.2 Maximum Conducted Output Power Measurement 13
3.3 Power Spectral Density Measurement 14
3.4 Unwanted Emissions Measurement 16
3.5 AC Conducted Emission Measurement 21
3.6 Antenna Requirements 23
4 List of Measuring Equipment **24**
5 Measurement Uncertainty **25**
Appendix A. Conducted Test Results
Appendix B. AC Conducted Emission Test Result
Appendix C. Radiated Spurious Emission Test Result
Appendix D. Duty Cycle Plots
Appendix E. Spot Check Evaluation on PY7-84526Y

History of this test report

Report No.	Version	Description	Issue Date
FR620305F	01	Initial issue of report	Jun. 29, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	6dB & 26dB Bandwidth	Pass	See Note
3.1	2.1049	99% Occupied Bandwidth	Pass	See Note
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	See Note
3.4	15.407(b)	Unwanted Emissions	Pass	6.57 dB under the limit at 53.28 MHz
3.5	15.207	AC Conducted Emission	Pass	5.87 dB under the limit at 1.05 MHz
3.6	15.203	Antenna Requirement	Pass	-

Note:

1. ECR inquiry for data referencing from FCC ID: PY7-75158T has been approved by TCB. The ECR inquiry and the associated document are submitted in the confidential exhibit.
2. The only difference between FCC ID: PY7-75158T and FCC ID: PY7-84526Y are Cellular Support Band & RF Circuit.
3. For Radiated is Full test,All the conducted test results are referenced from FCC ID: PY7-75158T (Sporton Test Report FR620304F), and spot check conducted power results to justify data referencing is presented in the Appendix E.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Freda Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Specification is subject to this standard	
General Specs	GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC and BDS/Galileo/GLONASS/GPS.
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth:PIFA Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna NFC: LOOP Antenna

Antenna information		
5725 MHz ~ 5850 MHz	Peak Gain (dBi)	Ant. 6: -0.4 Ant. 7: 0.8

Remark:

1. MIMO Ant. 6+7 Directional Gain is a calculated result from MIMO Ant. 6 and MIMO Ant. 7. The formula used in calculation is documented in section 1.1.1.
2. Power of MIMO Ant. 6 + Ant. 7 is a calculated result from sum of the power MIMO Ant. 6 and MIMO Ant. 7.
3. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List			
HW Version	**SW Version**	**S/N**	**Performed Test Item**
A	0.27	DCMBBAG0AWB00001	RF conducted measurement
	0.27	DCMBBAG0AWA0009D	Radiated Spurious Emission
	0.27	DCMBBAG0AWA00074	AC Conducted Emission

Specification of Accessory		
AC Adapter	**Brand Name**	Sony
	Model Name	XQZ-UC1
Earphone	**Brand Name**	Sony
	Model Name	MDR-EX15AP
USB Cable 1	**Brand Name**	Sony
	Model Name	XQZ-UB1
USB Cable 2	**Brand Name**	Sony
	Model Name	UCB20

1.1.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation. .

$$DirectionalGain = 10 \cdot \log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the kth antenna is being fed by spatial stream j, or zero if it is not;

G_k is the gain in dBi of the kth antenna.

As minimum N_{SS}=1 is supported by EUT, the formula can be simplified as:

Directional gain = $10*\log[(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}]$ dBi

Where G1, G2….GN denote single antenna gain.

The directional gain "DG" is calculated as following table.

	Ant 6 (dBi)	Ant 7 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band IV	-0.40	0.80	0.80	3.23	0.00	0.00

Calculation example:

If a device has two antenna, G_{ANT6}= -0.4dBi; G_{ANT7}=0.8dBi

Directional gain of power measurement = max(-0.4, 0.8) + 0 = 0.8 dBi

Directional gain of PSD derived from formula which is

10 x log { { [10^ (-0.40 dBi / 20) + 10^ (0.80 dBi / 20)] ^ 2 } / 2 }

= 3.23 dBi

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 414788 D01 Radiated Test Site v01r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- FCC Part 15 Subpart E
- ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80.

2.2 Test Mode

This device support 26/52/106/242/484/996.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11n mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Test Cases	
AC Conducted Emission	Mode 1: BT Link + WLAN 5G Link + MPEG4 + USB Cable + Adapter + Earphone

Remark:
1. The detailed Radiated test modes are shown in Appendix C.
2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

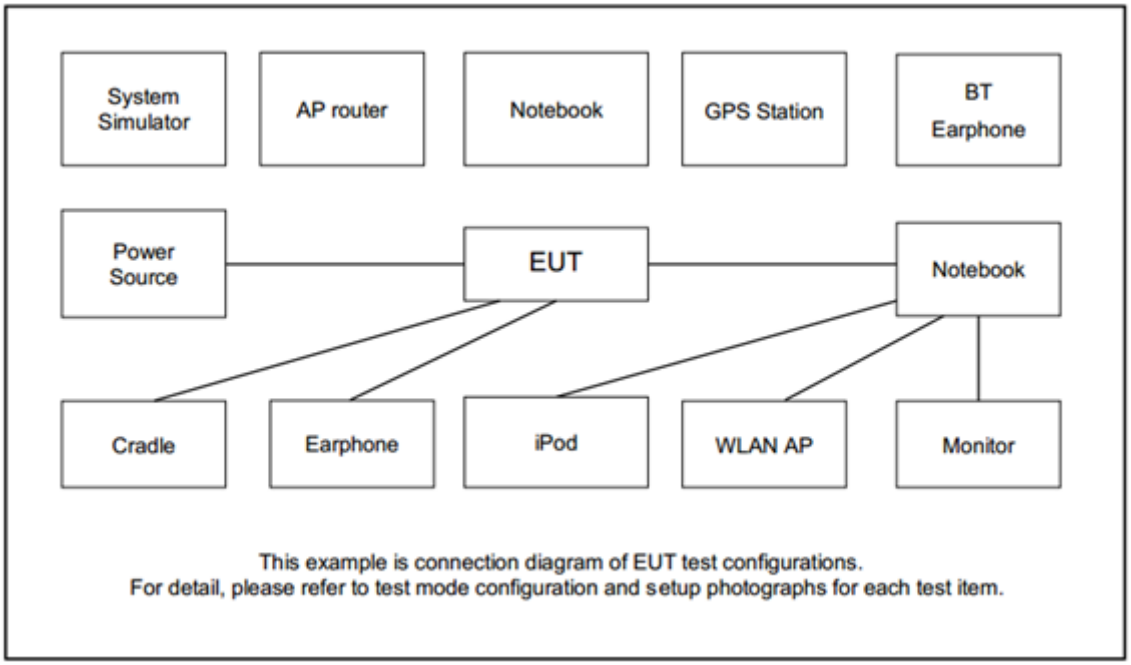

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	SonyEricsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Earphone	Sony	MDR-EX15AP	N/A	Unshielded, 1.2 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT Version 4.0.181.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85 GHz
2. Set RBW = 100 kHz.
3. Set the VBW ≥ 3 x RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup

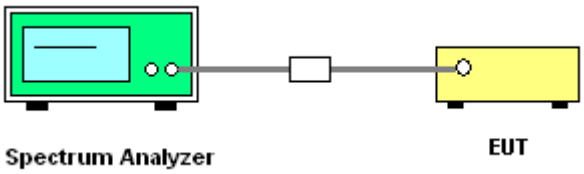

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to FCC ID: PY7-75158T (Sporton Test Report FR620304F)

.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

3.2.4 Test Setup

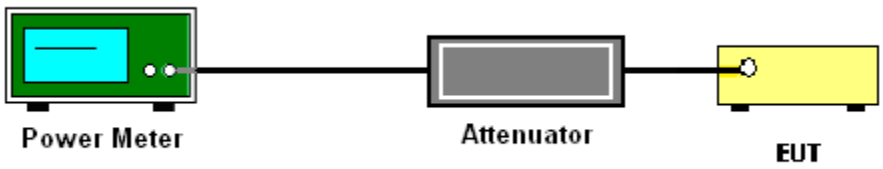

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

 # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500kHz.
- Set VBW ≥ 1 MHz.
- Number of points in sweep ≥ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add 10 log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add 10 log(1/0.25) = 6 dB if the duty cycle is 25 percent.

1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
   Method (c): Measure and add 10 log(N_{ANT}) dB.
   With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity 10 log(N_{ANT}) dB is added to each spectrum value before comparing to the emission limit. The addition of 10 log(N_{ANT}) dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}$ th of the PSD limit.

3.3.4 Test Setup

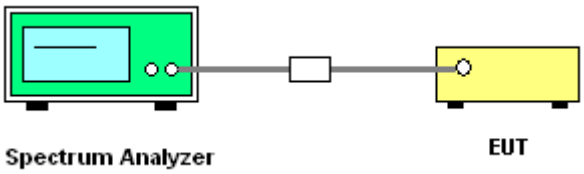

3.3.5 Test Result of Power Spectral Density

Please refer to FCC ID: PY7-75158T (Sporton Test Report FR620304F)

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E=\frac{1000000\sqrt{30P}}{3}$$ μV/m, where P is the eirp (Watts)

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

   (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

   - RBW = 120 kHz
   - VBW = 300 kHz
   - Detector = Peak
   - Trace mode = max hold

   (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

   - RBW = 1 MHz
   - VBW ≥ 3 MHz
   - Detector = Peak
   - Sweep time = auto
   - Trace mode = max hold

   (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

   - RBW = 1 MHz
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.

6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as "-".
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies.
   When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".

3.4.4 Test Setup

For radiated emissions below 30MHz

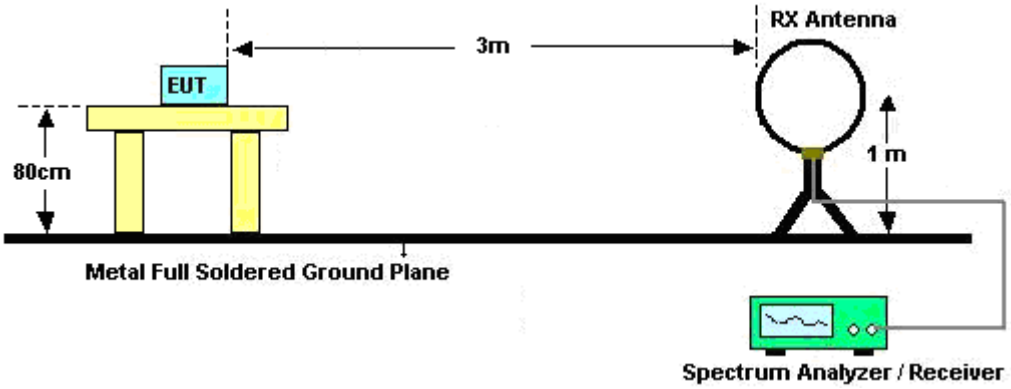

For radiated emissions from 30MHz to 1GHz

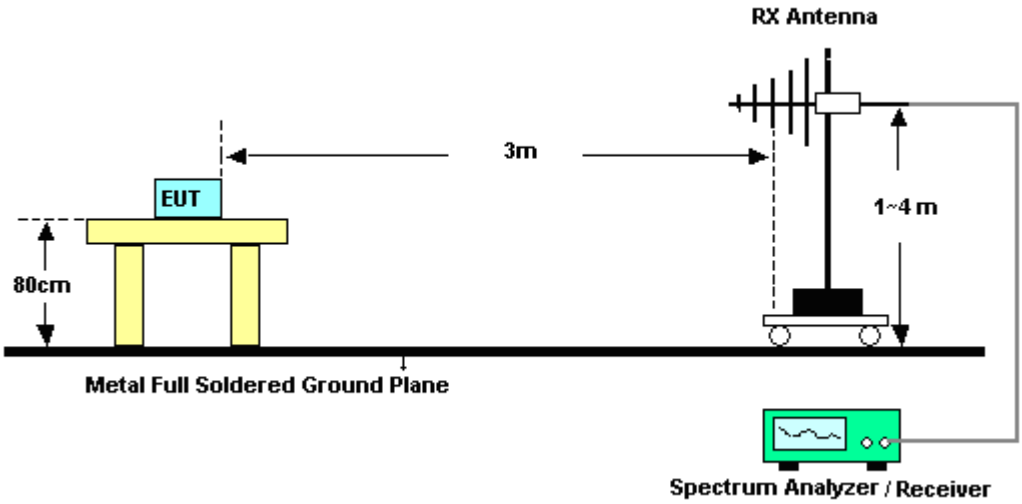

For radiated test from 1GHz to 18GHz

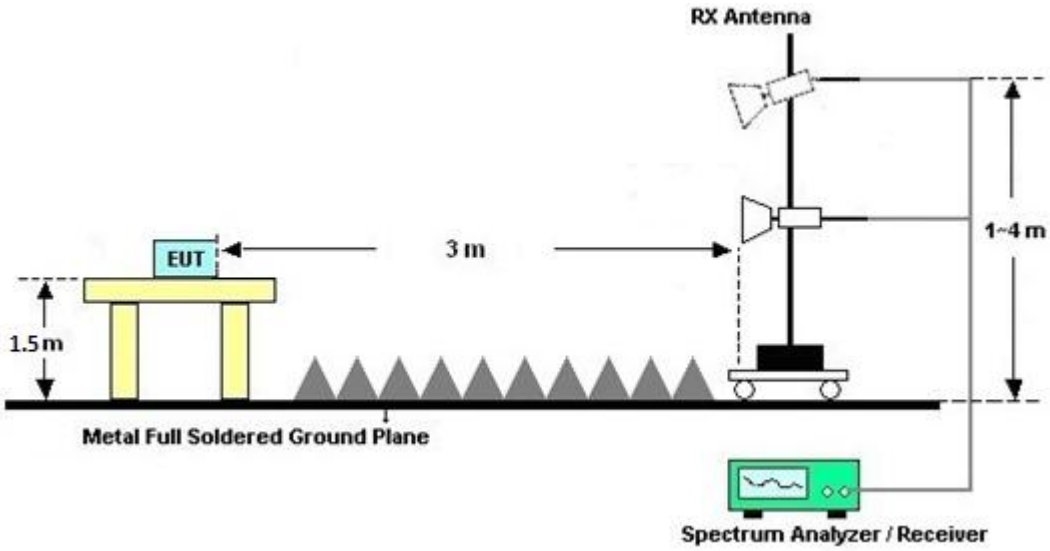

For radiated test above 18GHz

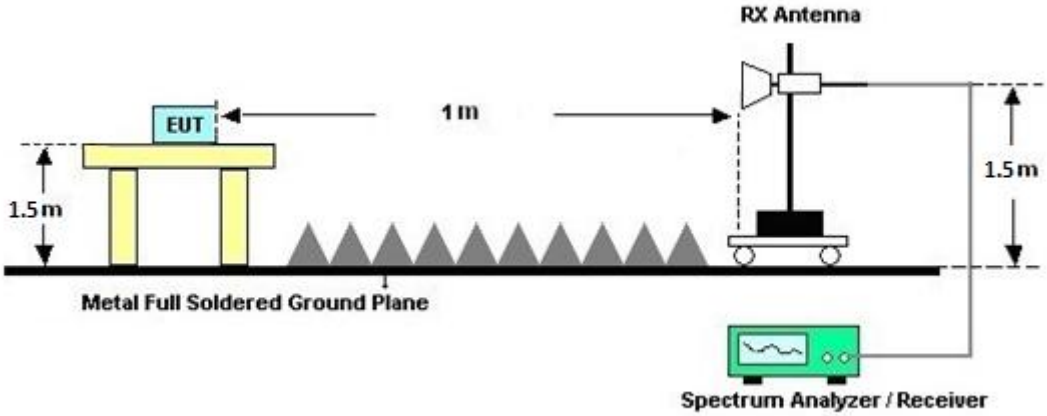

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site **v01r01**, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

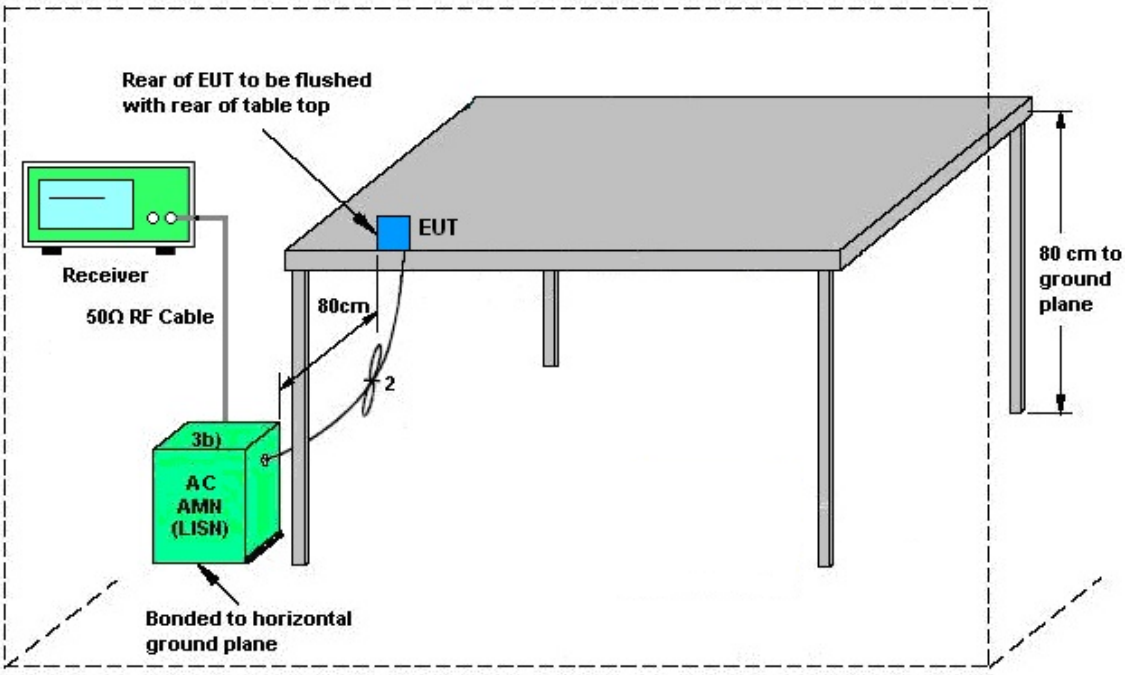

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Antenna permanently attached.

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9kHz~30MHz	Dec. 21, 2025	Apr. 10, 2026 ~ May 18, 2026	Dec. 20, 2026	Radiation (03CH22-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Nov. 26, 2025	Apr. 10, 2026 ~ May 18, 2026	Nov. 25, 2026	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 13, 2025	Apr. 10, 2026 ~ May 18, 2026	Jul. 12, 2026	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18EN	1GHz~18GHz	May 20, 2025	Apr. 10, 2026 ~ May 18, 2026	May 19, 2026	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1225	18GHz-40GHz	Jul. 02, 2025	Apr. 10, 2026 ~ May 18, 2026	Jul. 01, 2026	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 26, 2025	Apr. 10, 2026 ~ May 18, 2026	Sep. 25, 2026	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060872	18-40GHz	Dec. 02, 2025	Apr. 10, 2026 ~ May 18, 2026	Dec. 01, 2026	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY62170278	10Hz~44GHz	Sep. 22, 2025	Apr. 10, 2026 ~ May 18, 2026	Sep. 21, 2026	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP211469	N/A	Dec. 15, 2025	Apr. 10, 2026 ~ May 18, 2026	Dec. 14, 2026	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 10, 2026 ~ May 18, 2026	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 10, 2026 ~ May 18, 2026	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 10, 2026 ~ May 18, 2026	N/A	Radiation (03CH22-HY)
Software	Audix	E3	RK-002347	N/A	N/A	Apr. 10, 2026 ~ May 18, 2026	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 04, 2026	Apr. 10, 2026 ~ May 18, 2026	Mar. 03, 2027	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER/EMCI	SUCOFLEX 102/EMCI01Y-KM-KM-500/EMCI01Y-KM-KM-9000	804611/2,240914, 25043351,25043350	30MHz~40GHz	May 19, 2025	Apr. 10, 2026 ~ May 17, 2026	May 18, 2026	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER/ EMCI	SUCOFLEX 102/EMCI01Y-KM-KM-500/EMCI01Y-KM-KM-9000	804611/ 2,240914, 25043351, 25043350	30MHz~40GHz	May. 18, 2026	May 18, 2026	May. 17, 2027	Radiation (03CH22-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 05, 2026	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 05, 2026	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Mar. 05, 2026	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 02, 2026	Mar. 05, 2026	Mar. 01, 2027	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Mar. 05, 2026	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2025	Mar. 05, 2026	Oct. 20, 2026	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	May 22, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	May 22, 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Nov. 12, 2025	May 22, 2026	Nov. 11, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	May 22, 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	May 22, 2026	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.7 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.3 dB

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.4 dB

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.7 dB

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2026/5/22	Relative Humidity:	51~54	%

Report Number : FR620305F

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	149	5745	8.99	8.92	11.97	30.00		0.80		Pass
11a	6Mbps	2	157	5785	8.98	8.75	11.88	30.00		0.80		Pass
11a	6Mbps	2	165	5825	8.98	8.70	11.85	30.00		0.80		Pass
HT20	MCS0	2	149	5745	8.95	8.85	11.91	30.00		0.80		Pass
HT20	MCS0	2	157	5785	8.90	8.50	11.71	30.00		0.80		Pass
HT20	MCS0	2	165	5825	8.85	8.50	11.69	30.00		0.80		Pass
HT40	MCS0	2	151	5755	8.94	8.95	11.96	30.00		0.80		Pass
HT40	MCS0	2	159	5795	8.98	8.30	11.66	30.00		0.80		Pass
VHT20	MCS0	2	149	5745	9.00	8.95	11.99	30.00		0.80		Pass
VHT20	MCS0	2	157	5785	9.00	8.55	11.79	30.00		0.80		Pass
VHT20	MCS0	2	165	5825	8.95	8.55	11.76	30.00		0.80		Pass
VHT40	MCS0	2	151	5755	8.94	9.00	11.98	30.00		0.80		Pass
VHT40	MCS0	2	159	5795	8.95	8.35	11.67	30.00		0.80		Pass
VHT80	MCS0	2	155	5775	8.98	8.65	11.83	30.00		0.80		Pass

Report Number : FR620305F

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	149	5745	Full	9.00	8.85	11.94	30.00		0.80		Pass
HE20	MCS0	2	149	5745	26/0	8.44	8.70	11.58	30.00		0.80		Pass
HE20	MCS0	2	149	5745	52/37	8.95	8.95	11.96	30.00		0.80		Pass
HE20	MCS0	2	149	5745	106/53	8.99	8.95	11.98	30.00		0.80		Pass
HE20	MCS0	2	157	5785	Full	8.99	8.57	11.80	30.00		0.80		Pass
HE20	MCS0	2	157	5785	26/4	8.95	9.00	11.99	30.00		0.80		Pass
HE20	MCS0	2	157	5785	52/38	8.90	8.70	11.81	30.00		0.80		Pass
HE20	MCS0	2	157	5785	106/53	8.95	7.70	11.38	30.00		0.80		Pass
HE20	MCS0	2	165	5825	Full	8.94	8.59	11.78	30.00		0.80		Pass
HE20	MCS0	2	165	5825	26/8	8.81	8.75	11.79	30.00		0.80		Pass
HE20	MCS0	2	165	5825	52/40	8.79	8.48	11.65	30.00		0.80		Pass
HE20	MCS0	2	165	5825	106/54	8.90	8.19	11.57	30.00		0.80		Pass
HE40	MCS0	2	151	5755	Full	8.98	8.89	11.95	30.00		0.80		Pass
HE40	MCS0	2	151	5755	242/61	8.94	8.88	11.92	30.00		0.80		Pass
HE40	MCS0	2	159	5795	Full	8.95	8.69	11.83	30.00		0.80		Pass
HE40	MCS0	2	159	5795	242/62	8.94	7.80	11.42	30.00		0.80		Pass
HE80	MCS0	2	155	5775	Full	8.95	8.70	11.84	30.00		0.80		Pass
HE80	MCS0	2	155	5775	484/65	8.97	8.78	11.89	30.00		0.80		Pass
HE80	MCS0	2	155	5775	484/66	8.95	8.99	11.98	30.00		0.80		Pass

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	**Temperature :**	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO :	620305
Test Mode :	Mode 1
Test Voltage :	120Vac/60Hz
Phase :	Line

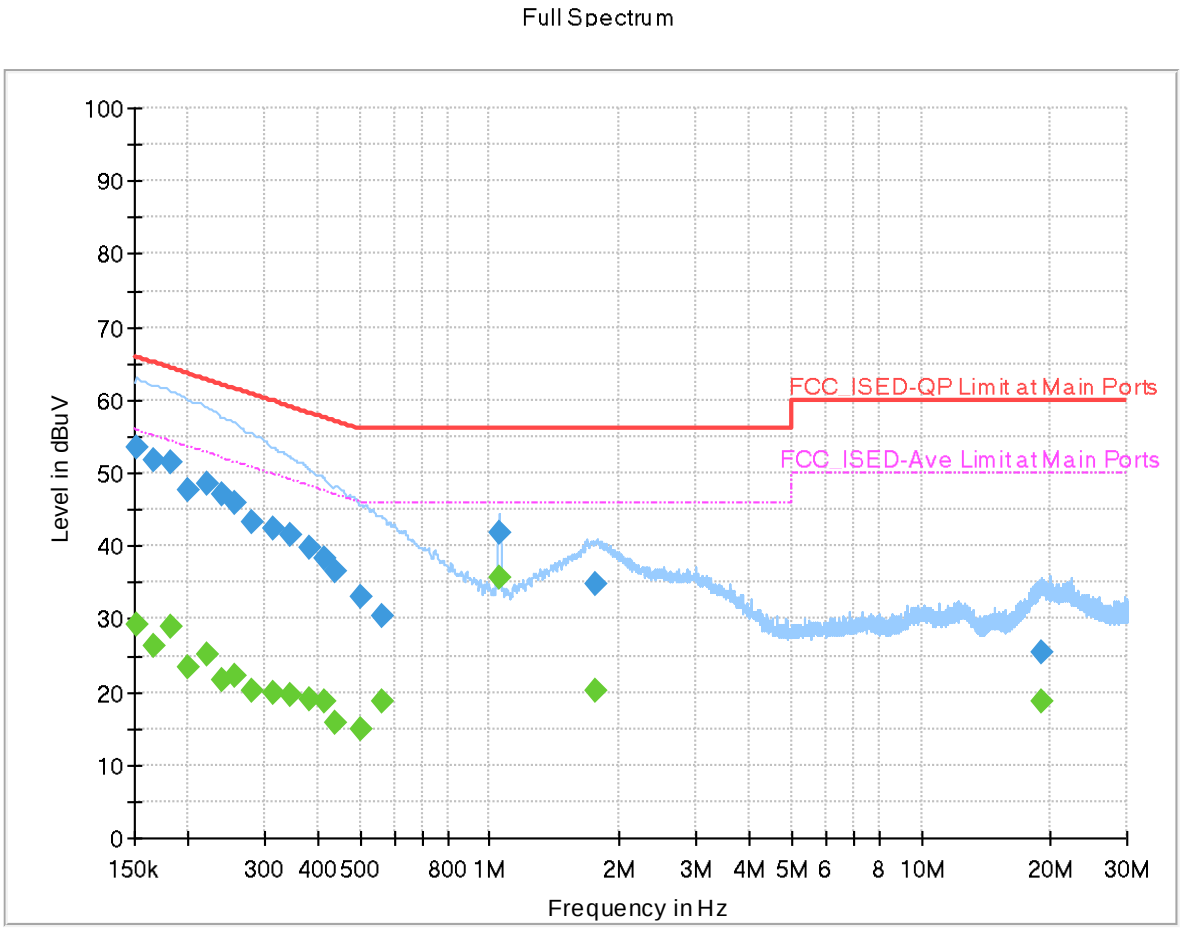

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.30	55.88	26.58	L1	ON	20.1
0.152250	53.45	---	65.88	12.43	L1	ON	20.1
0.165750	---	26.40	55.17	28.77	L1	ON	20.1
0.165750	51.62	---	65.17	13.55	L1	ON	20.1
0.181500	---	28.93	54.42	25.49	L1	ON	20.1
0.181500	51.38	---	64.42	13.04	L1	ON	20.1
0.199500	---	23.35	53.63	30.28	L1	ON	20.1
0.199500	47.75	---	63.63	15.88	L1	ON	20.1
0.219750	---	25.07	52.83	27.76	L1	ON	20.1
0.219750	48.59	---	62.83	14.24	L1	ON	20.1
0.240000	---	21.51	52.10	30.59	L1	ON	20.1
0.240000	47.06	---	62.10	15.04	L1	ON	20.1
0.255750	---	22.16	51.57	29.41	L1	ON	20.1
0.255750	45.98	---	61.57	15.59	L1	ON	20.1
0.280500	---	20.09	50.80	30.71	L1	ON	20.1
0.280500	43.35	---	60.80	17.45	L1	ON	20.1
0.314250	---	19.97	49.86	29.89	L1	ON	20.0
0.314250	42.44	---	59.86	17.42	L1	ON	20.0
0.343500	---	19.49	49.12	29.63	L1	ON	20.0

0.343500	41.64	---	59.12	17.48	L1	ON	20.0
0.384000	---	18.86	48.19	29.33	L1	ON	20.0
0.384000	39.74	---	58.19	18.45	L1	ON	20.0
0.415500	---	18.57	47.54	28.97	L1	ON	20.0
0.415500	38.16	---	57.54	19.38	L1	ON	20.0
0.440250	---	15.88	47.06	31.18	L1	ON	20.0
0.440250	36.41	---	57.06	20.65	L1	ON	20.0
0.503250	---	14.78	46.00	31.22	L1	ON	20.0
0.503250	33.07	---	56.00	22.93	L1	ON	20.0
0.561750	---	18.84	46.00	27.16	L1	ON	20.0
0.561750	30.35	---	56.00	25.65	L1	ON	20.0
1.052250	---	35.53	46.00	10.47	L1	ON	20.0
1.052250	41.72	---	56.00	14.28	L1	ON	20.0
1.758750	---	20.11	46.00	25.89	L1	ON	20.0
1.758750	34.93	---	56.00	21.07	L1	ON	20.0
18.930750	---	18.63	50.00	31.37	L1	ON	20.8
18.930750	25.49	---	60.00	34.51	L1	ON	20.8

EUT Information

Report NO :	620305
Test Mode :	Mode 1
Test Voltage :	120Vac/60Hz
Phase :	Neutral

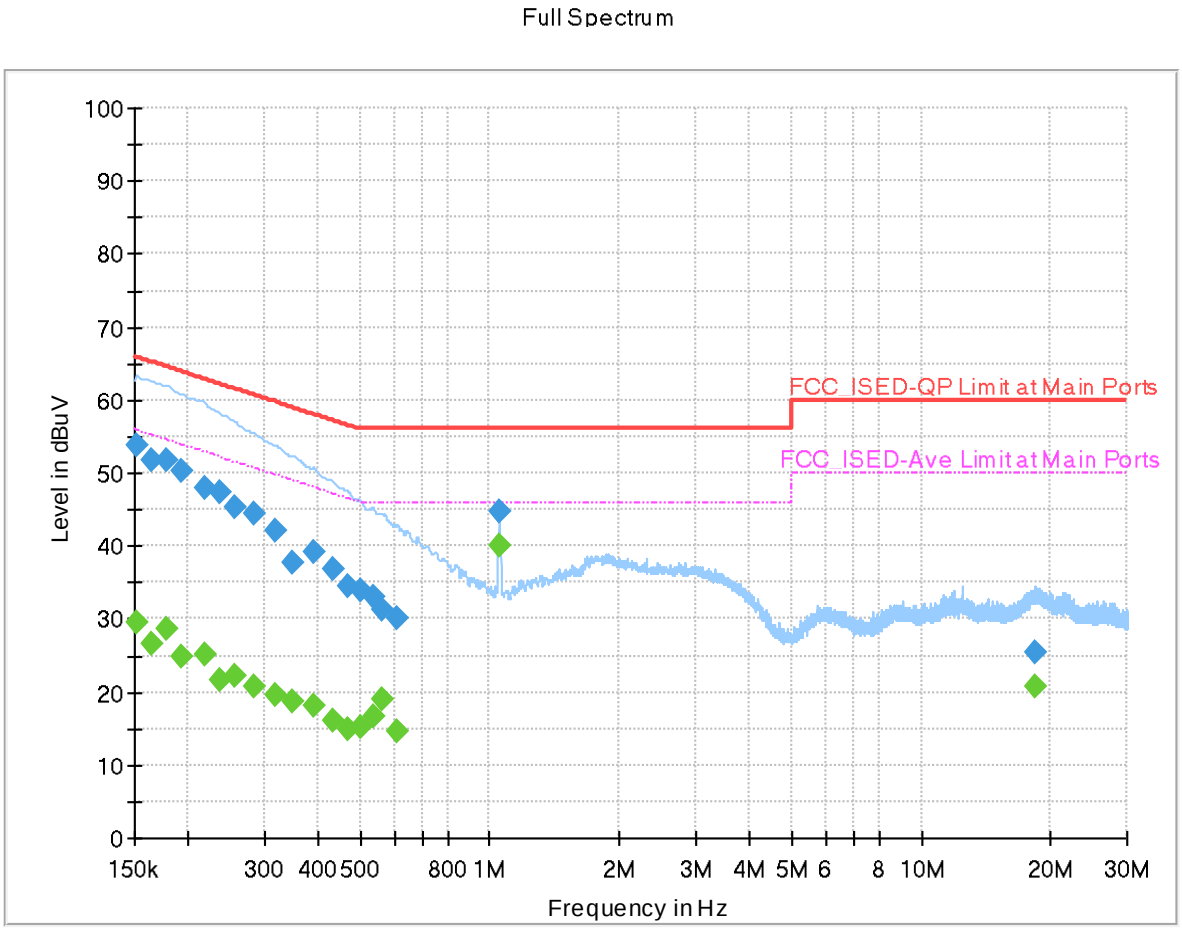

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.64	55.88	26.24	N	ON	20.1
0.152250	53.67	---	65.88	12.21	N	ON	20.1
0.163500	---	26.60	55.28	28.68	N	ON	20.1
0.163500	51.80	---	65.28	13.48	N	ON	20.1
0.177000	---	28.60	54.63	26.03	N	ON	20.1
0.177000	51.76	---	64.63	12.87	N	ON	20.1
0.192750	---	24.79	53.92	29.13	N	ON	20.1
0.192750	50.24	---	63.92	13.68	N	ON	20.1
0.217500	---	25.10	52.91	27.81	N	ON	20.1
0.217500	47.84	---	62.91	15.07	N	ON	20.1
0.235500	---	21.74	52.25	30.51	N	ON	20.1
0.235500	47.23	---	62.25	15.02	N	ON	20.1
0.255750	---	22.18	51.57	29.39	N	ON	20.1
0.255750	45.43	---	61.57	16.14	N	ON	20.1
0.285000	---	20.80	50.67	29.87	N	ON	20.0
0.285000	44.30	---	60.67	16.37	N	ON	20.0
0.318750	---	19.72	49.74	30.02	N	ON	20.0
0.318750	42.05	---	59.74	17.69	N	ON	20.0
0.348000	---	18.81	49.01	30.20	N	ON	20.0

0.348000	37.62	---	59.01	21.39	N	ON	20.0
0.390750	---	18.01	48.05	30.04	N	ON	20.0
0.390750	39.24	---	58.05	18.81	N	ON	20.0
0.433500	---	16.14	47.19	31.05	N	ON	20.0
0.433500	36.89	---	57.19	20.30	N	ON	20.0
0.469500	---	14.93	46.52	31.59	N	ON	20.0
0.469500	34.53	---	56.52	21.99	N	ON	20.0
0.501000	---	15.17	46.00	30.83	N	ON	20.0
0.501000	34.03	---	56.00	21.97	N	ON	20.0
0.534750	---	16.60	46.00	29.40	N	ON	20.0
0.534750	33.14	---	56.00	22.86	N	ON	20.0
0.564000	---	19.09	46.00	26.91	N	ON	20.0
0.564000	31.25	---	56.00	24.75	N	ON	20.0
0.611250	---	14.71	46.00	31.29	N	ON	20.0
0.611250	30.23	---	56.00	25.77	N	ON	20.0
1.052250	---	40.13	46.00	5.87	N	ON	20.0
1.052250	44.72	---	56.00	11.28	N	ON	20.0
18.467250	---	20.63	50.00	29.37	N	ON	20.8
18.467250	25.55	---	60.00	34.45	N	ON	20.8

Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Ken Kuo and York Huang	**Temperature :**	21.1 ~ 25.4°C
		Relative Humidity :	55.8 ~ 62.8 %

Note symbol

-L	**Low channel location**
-R	**High channel location**

C1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 62	U-NII-3	5.725-5.85	6+7	802.11a	149	5745	6Mbps	-	-
Mode 63	U-NII-3	5.725-5.85	6+7	802.11a	157	5785	6Mbps	-	-
Mode 64	U-NII-3	5.725-5.85	6+7	802.11a	165	5825	6Mbps	-	-
Mode 65	U-NII-3	5.725-5.85	6+7	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 66	U-NII-3	5.725-5.85	6+7	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 67	U-NII-3	5.725-5.85	6+7	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 68	U-NII-3	5.725-5.85	6+7	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 69	U-NII-3	5.725-5.85	6+7	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 70	U-NII-3	5.725-5.85	6+7	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 71	U-NII-3	5.725-5.85	6+7	802.11ax HE20	165	5825	MCS0	Partial RU 106/54	-
Mode 72	U-NII-3	5.725-5.85	6+7	802.11ax HE40	159	5795	MCS0	Partial RU 242/62	-

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 73	U-NII-3	5.725-5.85	6+7	802.11ax HE80	155	5775	MCS0	Partial RU 484/66	-
Mode 74	U-NII-3	5.725-5.85	6+7	802.11ac VHT20	165	5825	MCS0	-	-
Mode 75	U-NII-3	5.725-5.85	6+7	802.11ac VHT40	159	5795	MCS0	-	-
Mode 76	U-NII-3	5.725-5.85	6+7	802.11ac VHT80	155	5775	MCS0	-	-
Mode 77	U-NII-3	5.725-5.85	6+7	802.11ax HE80	155	5775	MCS0	Full RU	LF
Mode 78	U-NII-3	5.725-5.85	6+7	802.11ax HE80	155	5775	MCS0	Full RU	SHF
Mode 93	U-NII-3	5.725-5.85	6+7	802.11ax HE20	149	5745	MCS0	Partial RU 26/0	-
Mode 94	U-NII-3	5.725-5.85	6+7	802.11ax HE20	149	5745	MCS0	Partial RU 52/37	-
Mode 95	U-NII-3	5.725-5.85	6+7	802.11ax HE20	149	5745	MCS0	Partial RU 106/53	-
Mode 96	U-NII-3	5.725-5.85	6+7	802.11ax HE20	157	5785	MCS0	Partial RU 106/53	-
Mode 97	U-NII-3	5.725-5.85	6+7	802.11ax HE20	165	5825	MCS0	Partial RU 26/8	-

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 98	U-NII-3	5.725-5.85	6+7	802.11ax HE20	165	5825	MCS0	Partial RU 52/40	-

C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
62	802.11a	149	5641.91	50.06	68.20	-18.14	H	Peak	Pass	-	Band Edge
	802.11a	149	11490.00	41.75	54.00	-12.25	H	Avg.	Pass	-	Harmonic
63	802.11a	157	5947.53	50.74	68.20	-17.46	H	Peak	Pass	-	Band Edge
	802.11a	157	11570.00	42.00	54.00	-12.00	V	Avg.	Pass	-	Harmonic
64	802.11a	165	5941.50	50.85	68.20	-17.35	H	Peak	Pass	-	Band Edge
	802.11a	165	11650.00	41.92	54.00	-12.08	V	Avg.	Pass	-	Harmonic
65	802.11ax HE20	149	5630.16	49.95	68.20	-18.25	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	149	11490.00	41.84	54.00	-12.16	V	Avg.	Pass	Full RU	Harmonic
66	802.11ax HE20	157	5934.00	51.39	68.20	-16.81	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	157	11570.00	41.96	54.00	-12.04	H	Avg.	Pass	Full RU	Harmonic
67	802.11ax HE20	165	5939.13	51.37	68.20	-16.83	V	Peak	Pass	Full RU	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
67	802.11ax HE20	165	11650.00	41.88	54.00	-12.12	H	Avg.	Pass	Full RU	Harmonic
68	802.11ax HE40	151	5939.86	51.03	68.20	-17.17	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	151	11510.00	41.87	54.00	-12.13	H	Avg.	Pass	Full RU	Harmonic
69	802.11ax HE40	159	5644.46	51.83	68.20	-16.37	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	159	11590.00	41.94	54.00	-12.06	V	Avg.	Pass	Full RU	Harmonic
70	802.11ax HE80	155	5949.13	51.06	68.20	-17.14	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE80	155	11550.00	43.26	54.00	-10.74	V	Avg.	Pass	Full RU	Harmonic
71	802.11ax HE20	165	5929.63	50.65	68.20	-17.55	V	Peak	Pass	Partial RU 106/54	Band Edge
	802.11ax HE20	165	11650.00	42.50	54.00	-11.50	H	Avg.	Pass	Partial RU 106/54	Harmonic
72	802.11ax HE40	159	5936.98	51.41	68.20	-16.79	V	Peak	Pass	Partial RU 242/62	Band Edge
	802.11ax HE40	159	11590.00	42.76	54.00	-11.24	H	Avg.	Pass	Partial RU 242/62	Harmonic

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
73	802.11ax HE80	155	5949.13	51.81	68.20	-16.39	H	Peak	Pass	Partial RU 484/66	Band Edge
	802.11ax HE80	155	11550.00	42.57	54.00	-11.43	V	Avg.	Pass	Partial RU 484/66	Harmonic
74	802.11ac VHT20	165	5947.50	51.53	68.20	-16.67	V	Peak	Pass	-	Band Edge
	802.11ac VHT20	165	11650.00	42.63	54.00	-11.37	H	Avg.	Pass	-	Harmonic
75	802.11ac VHT40	159	5927.99	50.39	68.20	-17.81	V	Peak	Pass	-	Band Edge
	802.11ac VHT40	159	11590.00	42.68	54.00	-11.32	V	Avg.	Pass	-	Harmonic
76	802.11ac VHT80	155	5927.08	51.49	68.20	-16.71	V	Peak	Pass	-	Band Edge
	802.11ac VHT80	155	11550.00	42.27	54.00	-11.73	V	Avg.	Pass	-	Harmonic
77	LF	155	53.28	33.43	40.00	-6.57	H	Peak	Pass	-	LF
78	SHF	155	39589.61	40.34	54.00	-13.66	H	Avg.	Pass	-	SHF
93	802.11ax HE20	149	5638.28	51.30	68.20	-16.90	H	Peak	Pass	Partial RU 26/0	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
93	802.11ax HE20	149	11490.00	41.88	54.00	-12.12	V	Avg.	Pass	Partial RU 26/0	Harmonic
94	802.11ax HE20	149	5643.07	50.65	68.20	-17.55	H	Peak	Pass	Partial RU 52/37	Band Edge
	802.11ax HE20	149	11490.00	41.54	54.00	-12.46	V	Avg.	Pass	Partial RU 52/37	Harmonic
95	802.11ax HE20	149	5649.01	50.15	68.20	-18.05	H	Peak	Pass	Partial RU 106/53	Band Edge
	802.11ax HE20	149	11490.00	41.65	54.00	-12.35	V	Avg.	Pass	Partial RU 106/53	Harmonic
96	802.11ax HE20	157	5928.22	51.06	68.20	-17.14	V	Peak	Pass	Partial RU 106/53	Band Edge
	802.11ax HE20	157	11570.00	42.18	54.00	-11.82	V	Avg.	Pass	Partial RU 106/53	Harmonic
97	802.11ax HE20	165	5941.63	50.83	68.20	-17.37	V	Peak	Pass	Partial RU 26/8	Band Edge
	802.11ax HE20	165	11650.00	41.76	54.00	-12.24	V	Avg.	Pass	Partial RU 26/8	Harmonic
98	802.11ax HE20	165	5935.63	50.70	68.20	-17.50	H	Peak	Pass	Partial RU 52/40	Band Edge
	802.11ax HE20	165	11650.00	42.08	54.00	-11.92	H	Avg.	Pass	Partial RU 52/40	Harmonic

Mode	62
	Band Edge
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	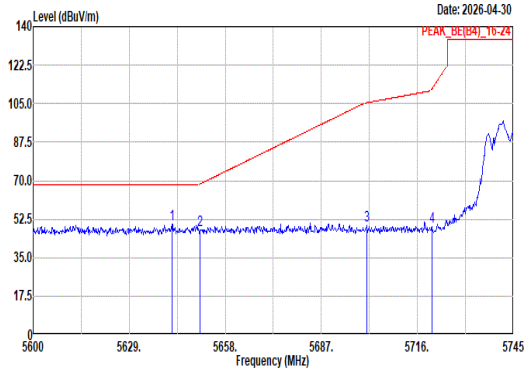 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5641.91 50.06 68.20 -18.14 38.12 33.14 12.43 34.55 0.92 297 0 Peak 2 5650.46 47.57 68.54 -20.97 35.56 33.20 12.43 34.56 0.94 297 0 Peak 3 5700.78 49.64 105.42 -55.78 37.06 33.70 12.45 34.60 1.03 297 0 Peak 4 5720.35 49.08 111.60 -62.52 36.49 33.70 12.45 34.62 1.06 297 0 Peak	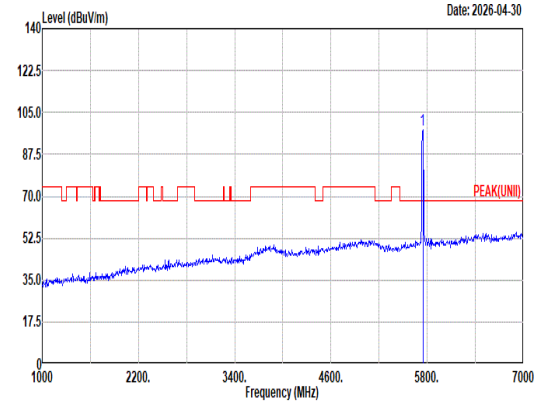 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 97.70 ------ ------ 85.07 33.70 12.46 34.64 1.11 297 0 Peak
Avg	Blank	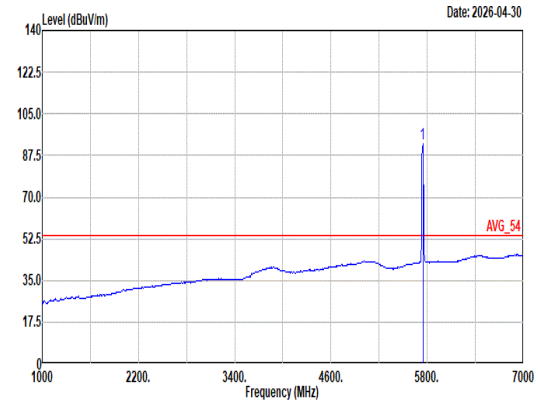 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 92.70 ------ ------ 80.07 33.70 12.46 34.64 1.11 297 0 Average

Mode	62
	Band Edge
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	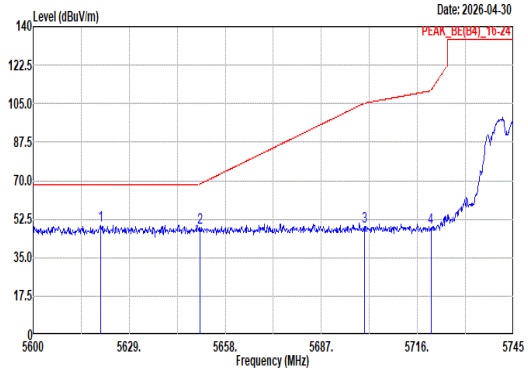 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5620.45 49.75 68.20 -18.45 38.00 32.96 12.43 34.53 0.89 100 33 Peak 2 5650.46 48.72 68.54 -19.82 36.71 33.20 12.43 34.56 0.94 100 33 Peak 3 5700.05 48.91 105.21 -56.30 36.33 33.70 12.45 34.60 1.03 100 33 Peak 4 5720.06 48.37 110.94 -62.57 35.78 33.70 12.45 34.62 1.06 100 33 Peak	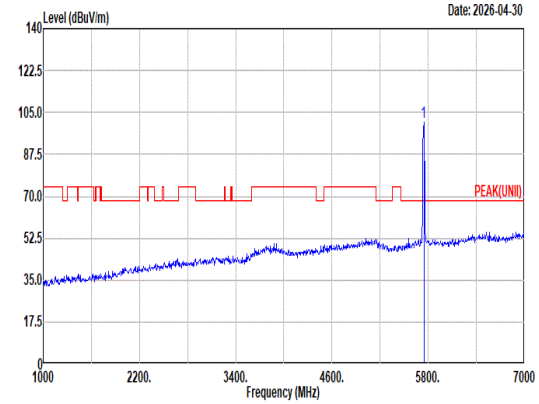 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 100.72 ------ ------ 88.09 33.70 12.46 34.64 1.11 100 33 Peak
Avg	Blank	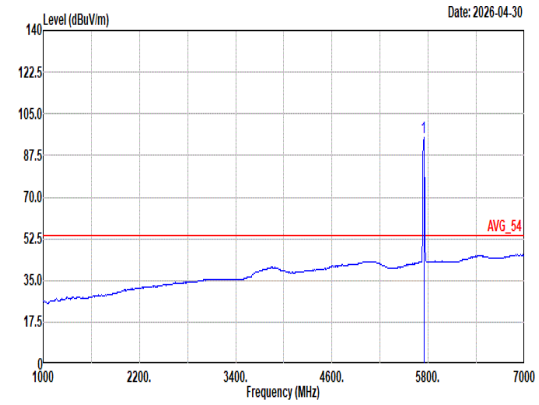 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 95.14 ------ ------ 82.51 33.70 12.46 34.64 1.11 100 33 Average

Mode	62	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	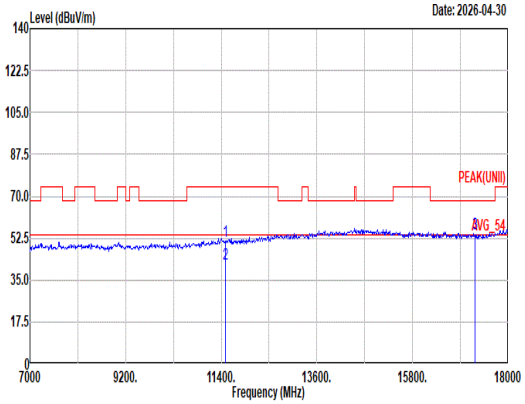 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL 1 11490.00 51.38 74.00 -22.62 33.47 38.90 17.86 40.22 1.37 -- -- Peak 2 11490.00 41.75 54.00 -12.25 23.84 38.90 17.86 40.22 1.37 -- -- Average 3 17235.00 54.25 68.20 -13.95 36.82 40.20 21.79 46.49 1.93 -- -- Peak	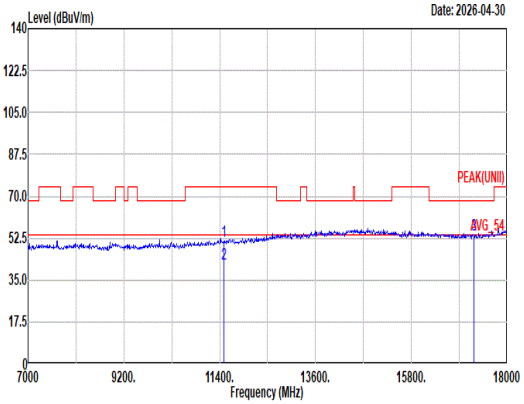 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL 1 11490.00 51.49 74.00 -22.51 33.58 38.90 17.86 40.22 1.37 -- -- Peak 2 11490.00 41.63 54.00 -12.37 23.72 38.90 17.86 40.22 1.37 -- -- Average 3 17235.00 53.91 68.20 -14.29 36.48 40.20 21.79 46.49 1.93 -- -- Peak

Mode	62	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	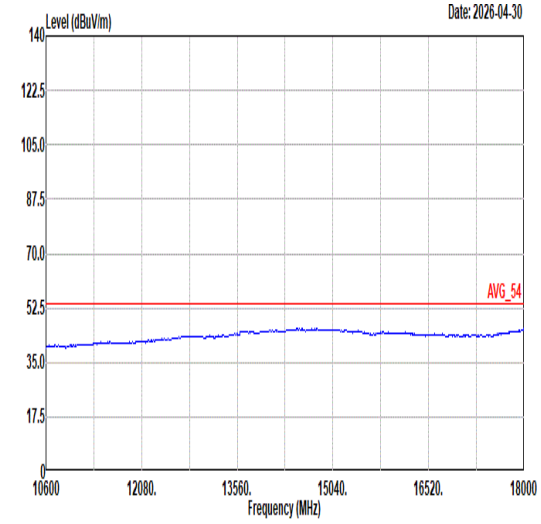 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	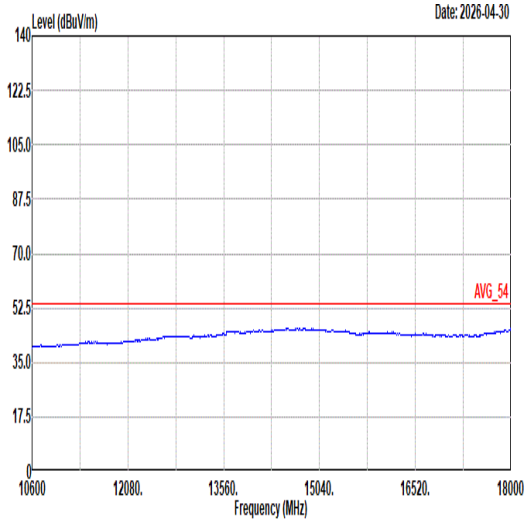 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	63
	Band Edge - L
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	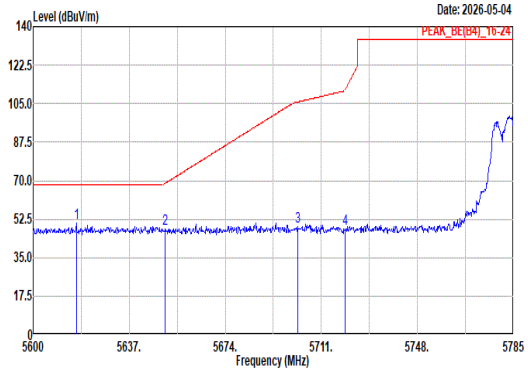 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5616.65 50.52 68.20 -17.68 38.81 32.93 12.42 34.52 0.88 100 87 Peak 2 5650.88 47.87 68.85 -20.98 35.85 33.21 12.43 34.56 0.94 100 87 Peak 3 5701.94 49.22 105.74 -56.52 36.64 33.70 12.45 34.60 1.03 100 87 Peak 4 5720.07 48.06 110.95 -62.89 35.47 33.70 12.45 34.62 1.06 100 87 Peak	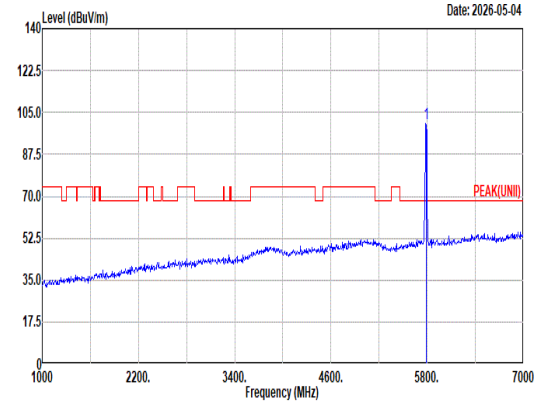 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 100.25 ------ ------ 87.52 33.76 12.47 34.67 1.17 100 87 Peak
Avg	Blank	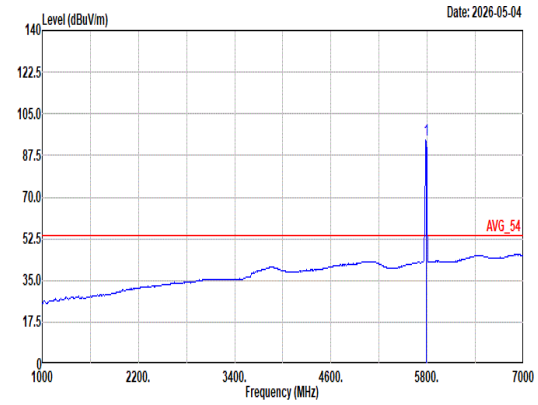 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 93.95 ------ ------ 81.22 33.76 12.47 34.67 1.17 100 87 Average

Mode	63	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	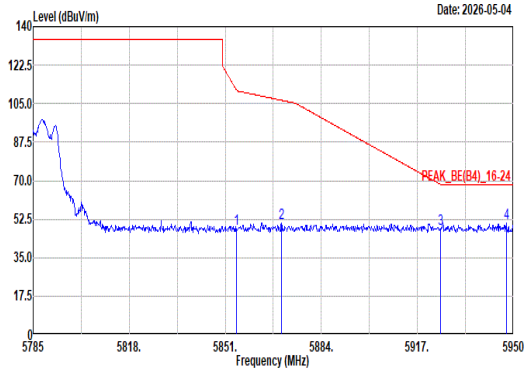 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.96 48.01 110.89 -62.88 35.40 33.61 12.61 34.74 1.13 100 87 Peak 2 5870.31 50.55 106.51 -55.96 37.90 33.64 12.65 34.75 1.11 100 87 Peak 3 5924.92 48.21 68.26 -20.05 35.54 33.65 12.78 34.80 1.04 100 87 Peak 4 5947.53 50.74 68.20 -17.46 38.11 33.60 12.84 34.82 1.01 100 87 Peak	Blank

Mode	63
	Band Edge - L
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	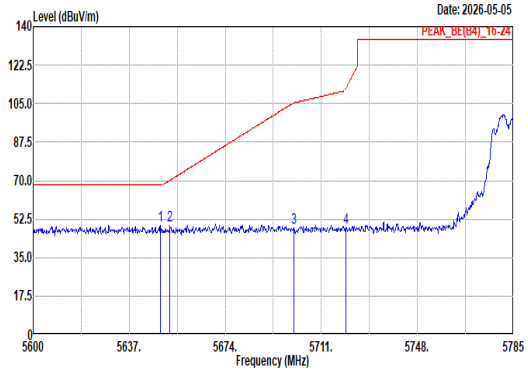 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.03 49.59 68.20 -18.61 37.58 33.19 12.43 34.55 0.94 100 34 Peak 2 5652.73 49.40 70.22 -20.82 37.36 33.23 12.43 34.56 0.94 100 34 Peak 3 5700.46 48.66 105.33 -56.67 36.08 33.70 12.45 34.60 1.03 100 34 Peak 4 5720.44 48.67 111.79 -63.12 36.08 33.70 12.45 34.62 1.06 100 34 Peak	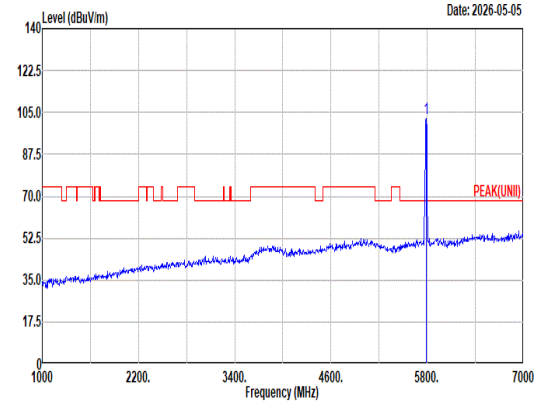 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 102.67 ------ ------ 89.92 33.78 12.47 34.68 1.18 100 34 Peak
Avg	Blank	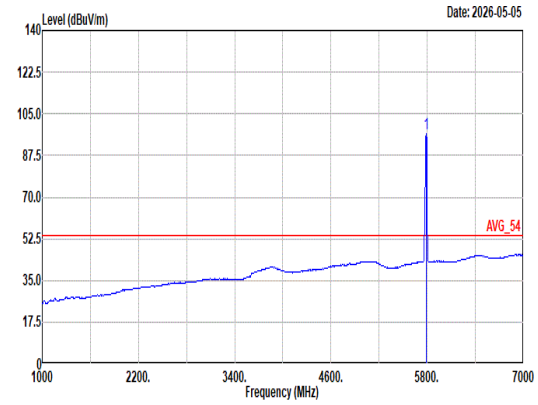 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 96.84 ------ ------ 84.09 33.78 12.47 34.68 1.18 100 34 Average

Mode	63	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	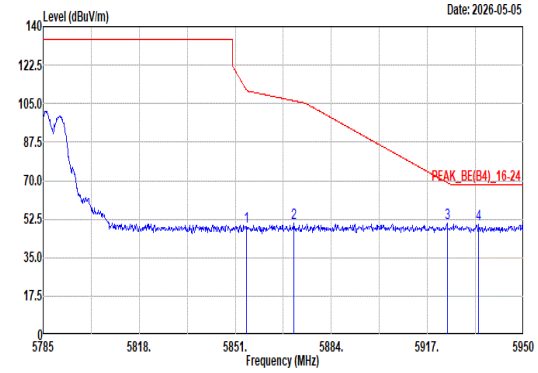 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 48.96 111.27 -62.31 36.35 33.61 12.61 34.74 1.13 100 34 Peak 2 5871.13 50.88 106.28 -55.40 38.23 33.64 12.65 34.75 1.11 100 34 Peak 3 5923.77 50.59 69.11 -18.52 37.92 33.65 12.78 34.80 1.04 100 34 Peak 4 5934.66 50.16 68.20 -18.04 37.51 33.63 12.81 34.81 1.02 100 34 Peak	Blank

Mode	63	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	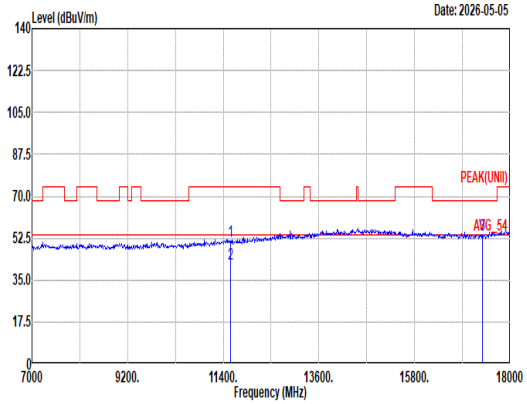 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL 1 11570.00 51.34 74.00 -22.66 33.35 39.00 17.91 40.30 1.38 -- -- Peak 2 11570.00 41.87 54.00 -12.13 23.88 39.00 17.91 40.30 1.38 -- -- Average 3 17355.00 53.69 68.20 -14.51 36.35 40.21 21.81 46.60 1.92 -- -- Peak	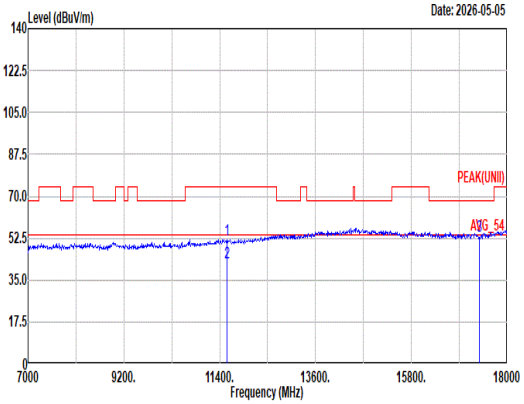 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL 1 11570.00 51.98 74.00 -22.02 33.99 39.00 17.91 40.30 1.38 -- -- Peak 2 11570.00 42.00 54.00 -12.00 24.01 39.00 17.91 40.30 1.38 -- -- Average 3 17355.00 53.41 68.20 -14.79 36.07 40.21 21.81 46.60 1.92 -- -- Peak

Mode	63	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	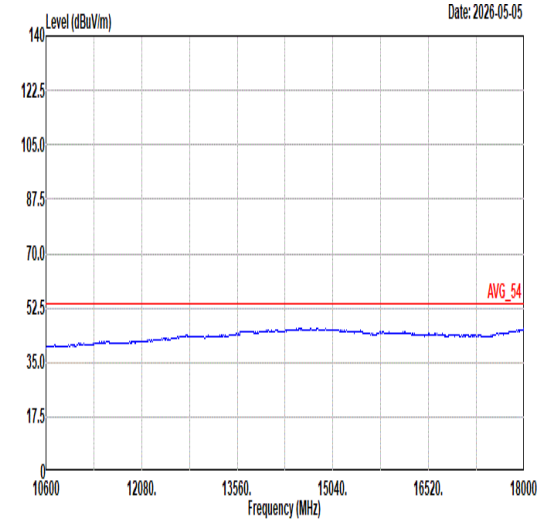 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	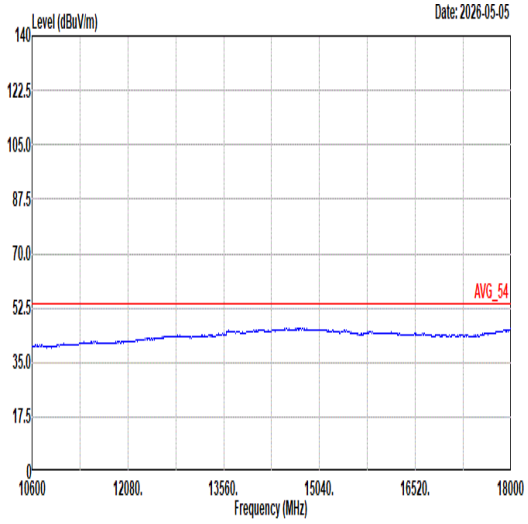 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	64	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	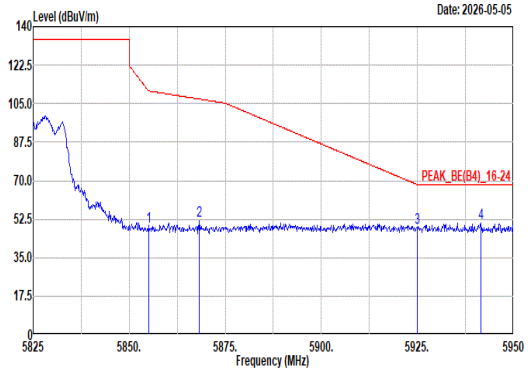 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 49.06 110.80 -61.74 36.45 33.61 12.61 34.74 1.13 100 75 Peak 2 5868.13 51.65 107.12 -55.47 39.01 33.64 12.64 34.75 1.11 100 75 Peak 3 5924.88 48.47 68.29 -19.82 35.80 33.65 12.78 34.80 1.04 100 75 Peak 4 5941.50 50.85 68.20 -17.35 38.21 33.62 12.82 34.82 1.02 100 75 Peak	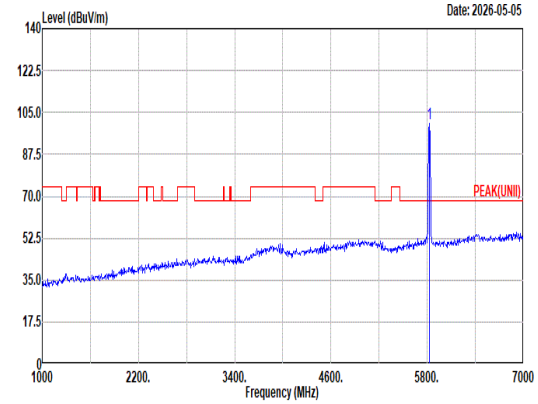 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 100.36 ------ ------ 87.69 33.68 12.55 34.72 1.16 100 75 Peak
Avg	Blank	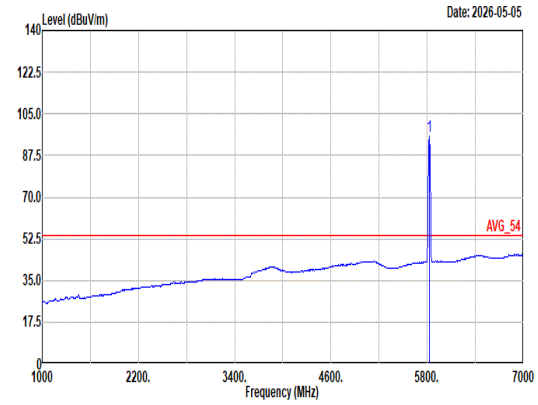 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 95.61 ------ ------ 82.92 33.70 12.53 34.71 1.17 100 75 Average

Mode	64	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	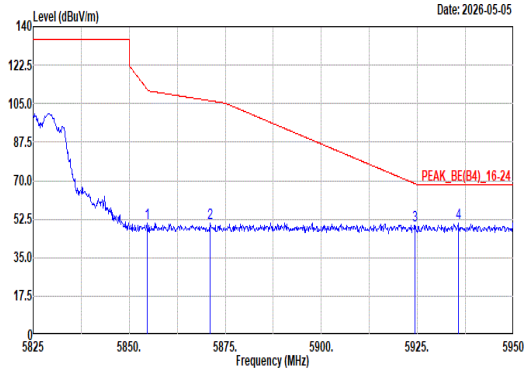 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.63 50.81 111.65 -60.84 38.20 33.61 12.61 34.74 1.13 190 30 Peak 2 5871.13 50.60 106.28 -55.68 37.95 33.64 12.65 34.75 1.11 190 30 Peak 3 5924.38 49.74 68.66 -18.92 37.07 33.65 12.78 34.80 1.04 190 30 Peak 4 5935.63 50.49 68.20 -17.71 37.84 33.63 12.81 34.81 1.02 190 30 Peak	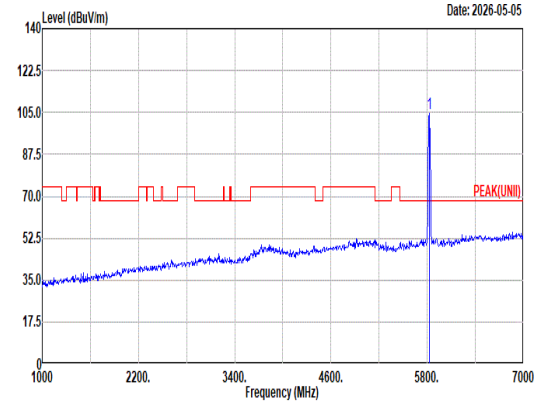 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 104.74 ------ ------ 92.05 33.70 12.53 34.71 1.17 190 30 Peak
Avg	Blank	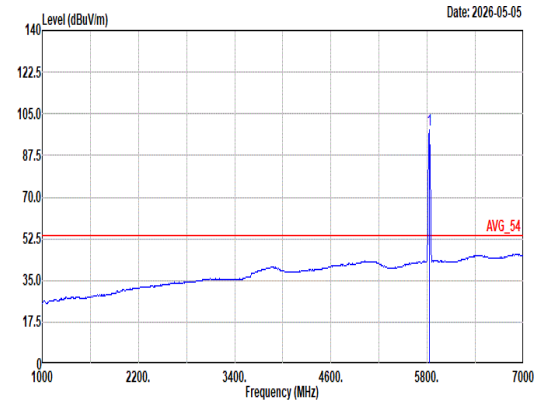 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 98.02 ------ ------ 85.33 33.70 12.53 34.71 1.17 190 30 Average

Mode	64	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	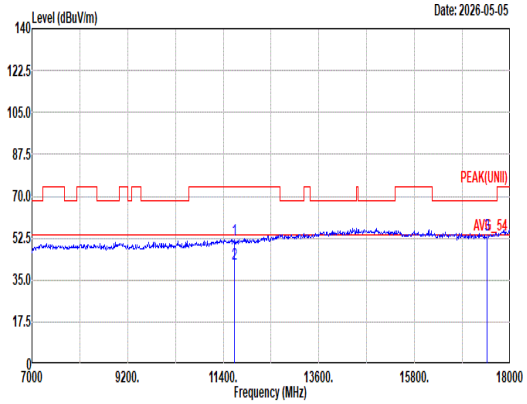 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 51.59 74.00 -22.41 33.62 39.00 17.96 40.37 1.38 -- -- Peak 2 11650.00 41.89 54.00 -12.11 23.92 39.00 17.96 40.37 1.38 -- -- Average 3 17475.00 53.77 68.20 -14.43 36.36 40.40 21.82 46.72 1.91 -- -- Peak	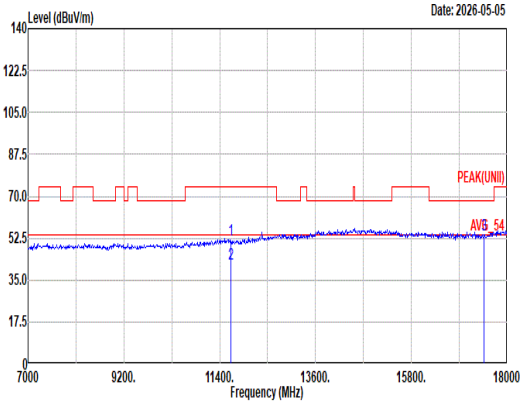 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 51.88 74.00 -22.12 33.91 39.00 17.96 40.37 1.38 -- -- Peak 2 11650.00 41.92 54.00 -12.08 23.95 39.00 17.96 40.37 1.38 -- -- Average 3 17475.00 53.64 68.20 -14.56 36.23 40.40 21.82 46.72 1.91 -- -- Peak

Mode	64	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	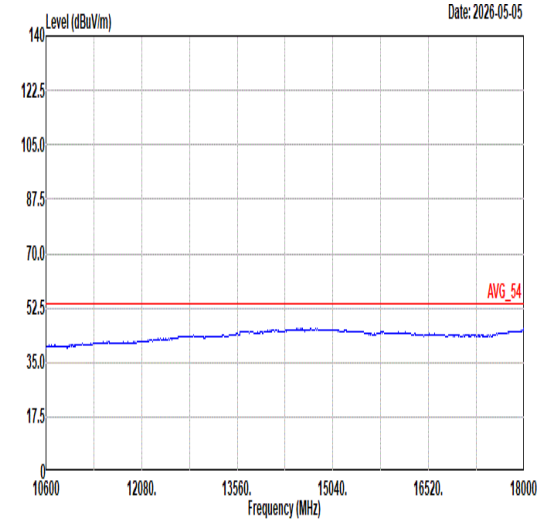 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	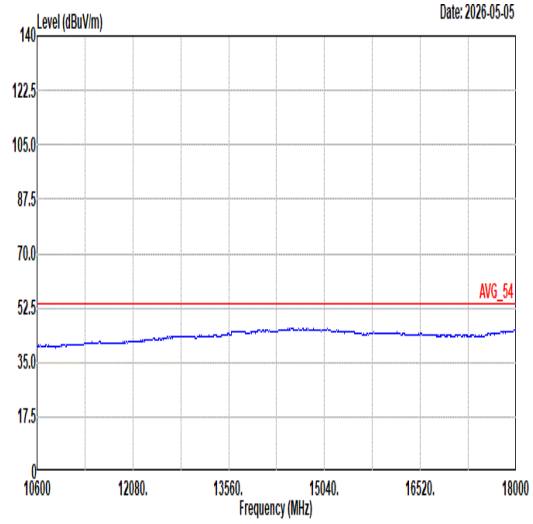 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	65	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	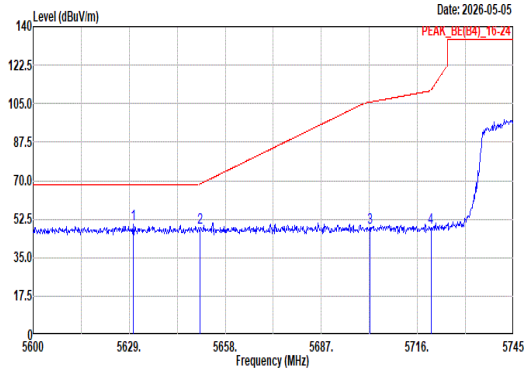 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5630.16 49.95 68.20 -18.25 38.12 33.04 12.43 34.54 0.90 100 74 Peak 2 5650.46 48.78 68.54 -19.76 36.77 33.20 12.43 34.56 0.94 100 74 Peak 3 5701.65 48.80 105.66 -56.86 36.22 33.70 12.45 34.60 1.03 100 74 Peak 4 5720.06 48.57 110.94 -62.37 35.98 33.70 12.45 34.62 1.06 100 74 Peak	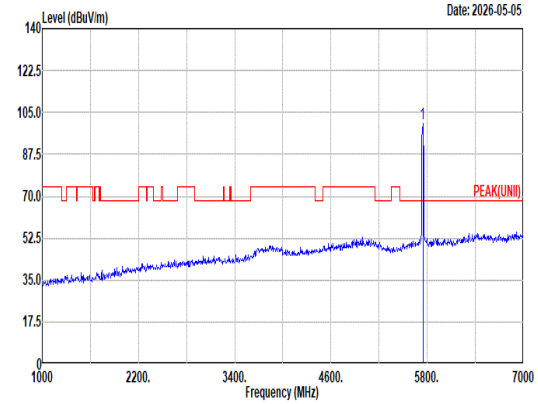 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 100.33 ------ ------ 87.70 33.70 12.46 34.64 1.11 100 74 Peak
Avg	Blank	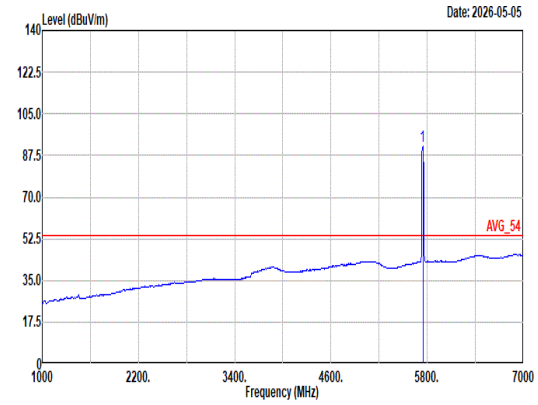 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 91.64 ------ ------ 79.01 33.70 12.46 34.64 1.11 100 74 Average	

Mode	65
	Band Edge
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	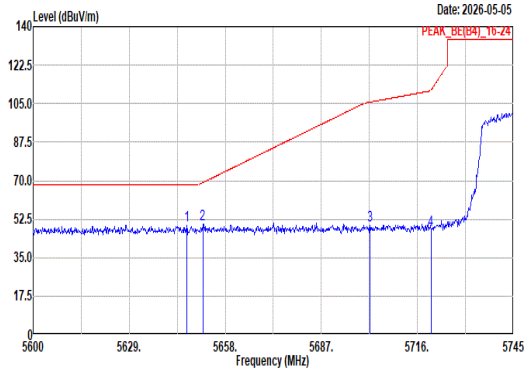 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.40 49.79 68.20 -18.41 37.81 33.17 12.43 34.55 0.93 100 32 Peak 2 5651.19 50.36 69.08 -18.72 38.34 33.21 12.43 34.56 0.94 100 32 Peak 3 5701.65 49.43 105.66 -56.23 36.85 33.70 12.45 34.60 1.03 100 32 Peak 4 5720.06 47.69 110.94 -63.25 35.10 33.70 12.45 34.62 1.06 100 32 Peak	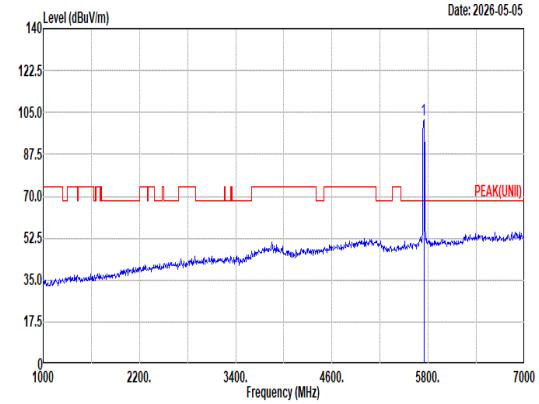 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.78 ------ ------ 89.15 33.70 12.46 34.64 1.11 100 32 Peak
Avg	Blank	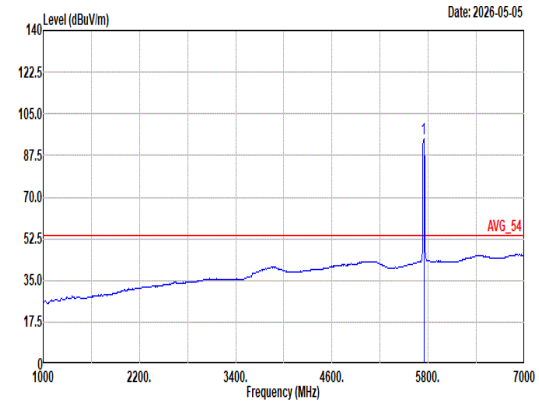 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 94.48 ------ ------ 81.85 33.70 12.46 34.64 1.11 100 32 Average

Mode	65	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	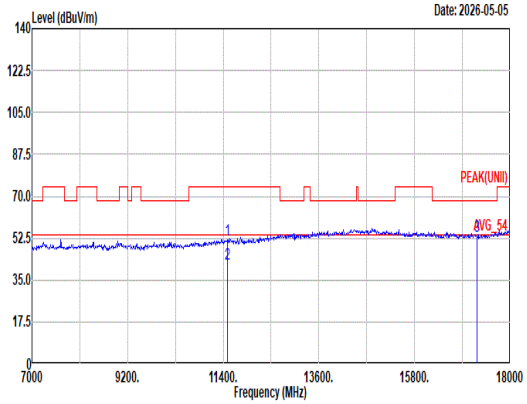 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 51.76 74.00 -22.24 33.85 38.90 17.86 40.22 1.37 -- -- Peak 2 11490.00 41.81 54.00 -12.19 23.90 38.90 17.86 40.22 1.37 -- -- Average 3 17235.00 53.46 68.20 -14.74 36.03 40.20 21.79 46.49 1.93 -- -- Peak	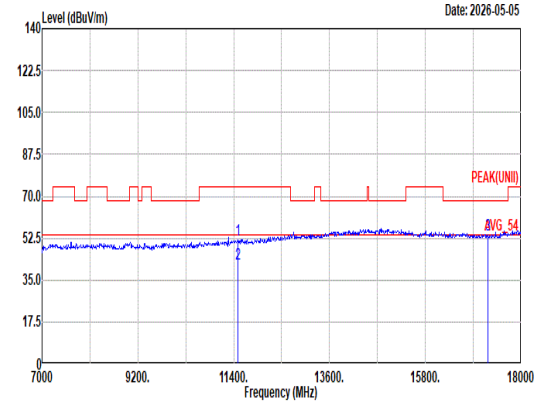 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 51.82 74.00 -22.18 33.91 38.90 17.86 40.22 1.37 -- -- Peak 2 11490.00 41.84 54.00 -12.16 23.93 38.90 17.86 40.22 1.37 -- -- Average 3 17235.00 53.90 68.20 -14.30 36.47 40.20 21.79 46.49 1.93 -- -- Peak

Mode	65	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	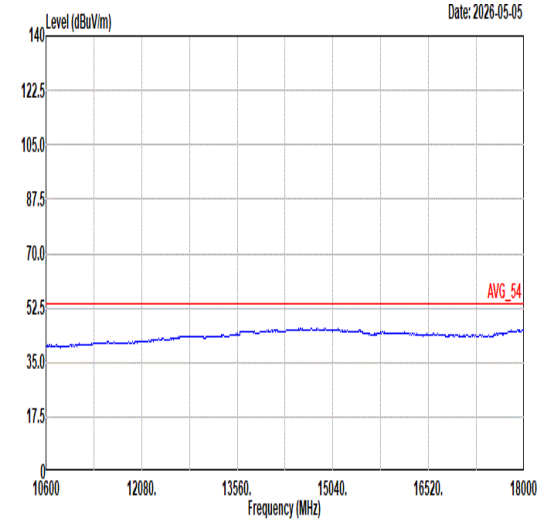 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	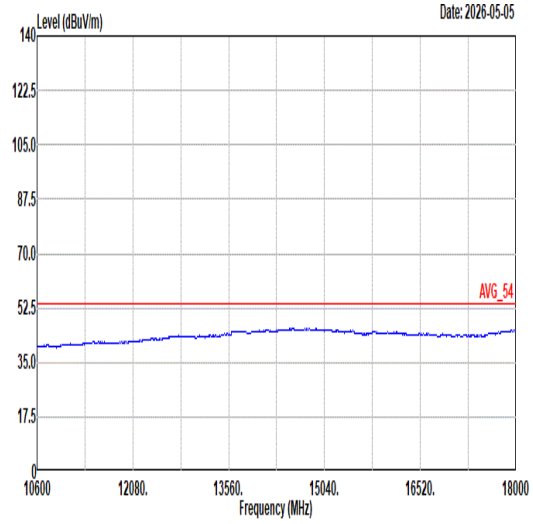 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	66
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	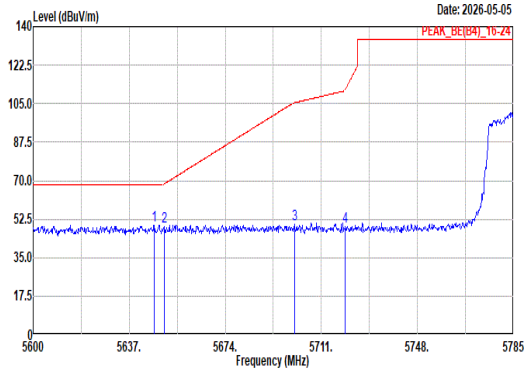 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.62 49.79 68.20 -18.41 37.81 33.17 12.43 34.55 0.93 100 42 Peak 2 5650.51 49.15 68.58 -19.43 37.13 33.21 12.43 34.56 0.94 100 42 Peak 3 5700.64 50.44 105.38 -54.94 37.86 33.70 12.45 34.60 1.03 100 42 Peak 4 5720.25 48.89 111.37 -62.48 36.30 33.70 12.45 34.62 1.06 100 42 Peak	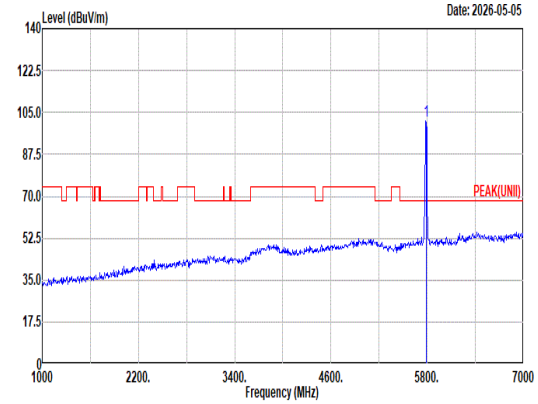 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 101.29 ------ ------ 88.56 33.76 12.47 34.67 1.17 100 42 Peak
Avg	Blank	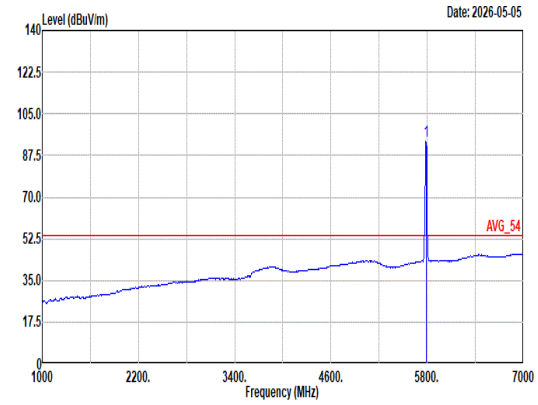 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 93.37 ------ ------ 80.64 33.76 12.47 34.67 1.17 100 42 Average

Mode	66	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	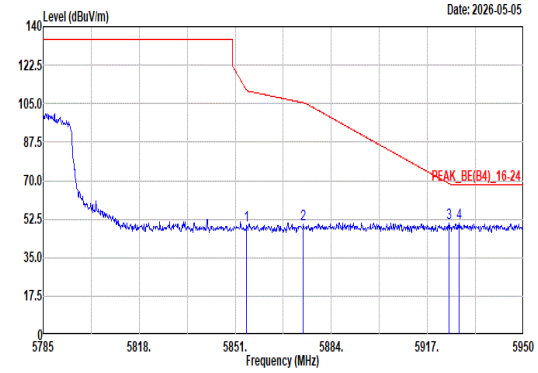 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.96 49.71 110.89 -61.18 37.10 33.61 12.61 34.74 1.13 100 42 Peak 2 5874.43 50.37 105.36 -54.99 37.72 33.65 12.66 34.76 1.10 100 42 Peak 3 5924.43 50.73 68.62 -17.89 38.06 33.65 12.78 34.80 1.04 100 42 Peak 4 5927.89 50.45 68.20 -17.75 37.80 33.64 12.79 34.81 1.03 100 42 Peak	Blank

Mode	66
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	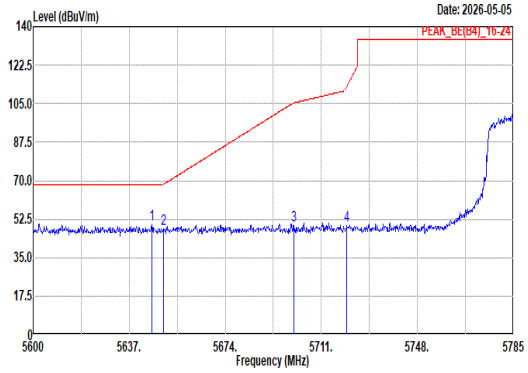 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5645.70 50.26 68.20 -17.94 38.28 33.17 12.43 34.55 0.93 100 7 Peak 2 5650.14 47.95 68.30 -20.35 35.94 33.20 12.43 34.56 0.94 100 7 Peak 3 5700.46 49.59 105.33 -55.74 37.01 33.70 12.45 34.60 1.03 100 7 Peak 4 5720.81 49.85 112.64 -62.79 37.26 33.70 12.45 34.62 1.06 100 7 Peak	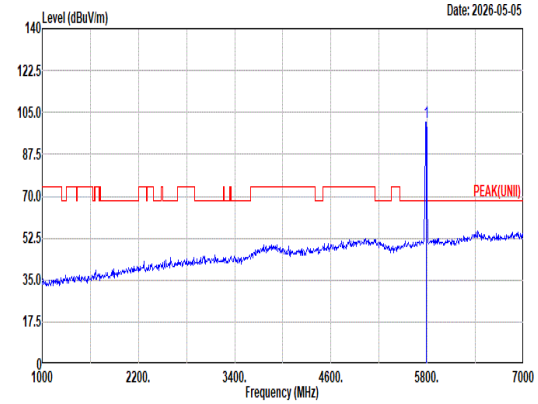 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 101.11 ------ ------ 88.38 33.76 12.47 34.67 1.17 100 7 Peak
Avg	Blank	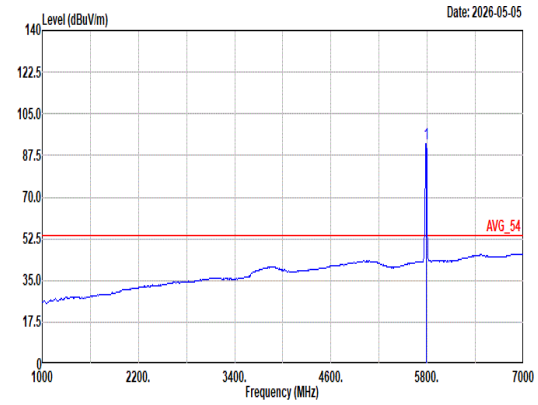 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 92.45 ------ ------ 79.72 33.76 12.47 34.67 1.17 100 7 Average

Mode	66	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	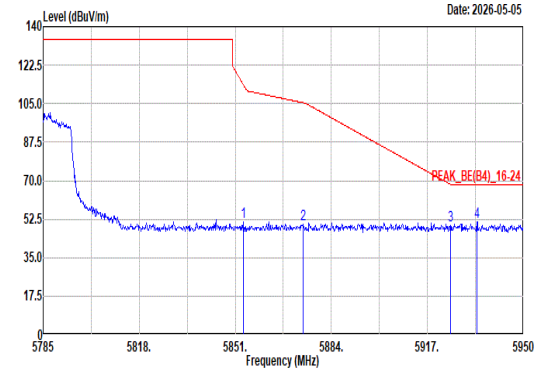 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5853.81 51.37 113.52 -62.15 38.77 33.61 12.60 34.74 1.13 100 7 Peak 2 5874.43 49.94 105.36 -55.42 37.29 33.65 12.66 34.76 1.10 100 7 Peak 3 5924.92 49.80 68.26 -18.46 37.13 33.65 12.78 34.80 1.04 100 7 Peak 4 5934.00 51.39 68.20 -16.81 38.74 33.63 12.80 34.81 1.03 100 7 Peak	Blank

Mode	66	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	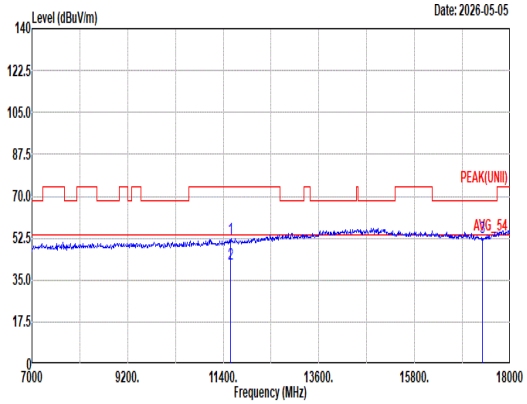 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 52.32 74.00 -21.68 34.33 39.00 17.91 40.30 1.38 -- -- Peak 2 11570.00 41.96 54.00 -12.04 23.97 39.00 17.91 40.30 1.38 -- -- Average 3 17355.00 52.63 68.20 -15.57 35.29 40.21 21.81 46.60 1.92 -- -- Peak	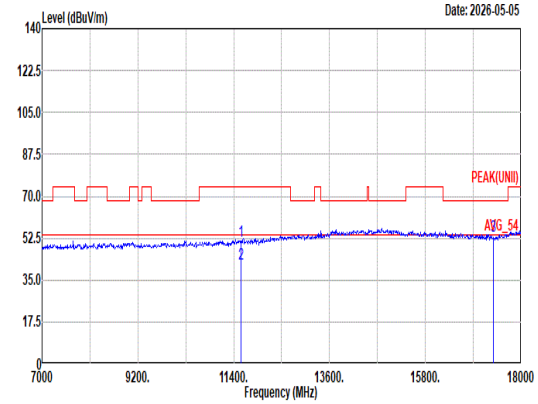 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 51.49 74.00 -22.51 33.50 39.00 17.91 40.30 1.38 -- -- Peak 2 11570.00 41.57 54.00 -12.43 23.58 39.00 17.91 40.30 1.38 -- -- Average 3 17355.00 53.35 68.20 -14.85 36.01 40.21 21.81 46.60 1.92 -- -- Peak

Mode	66	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	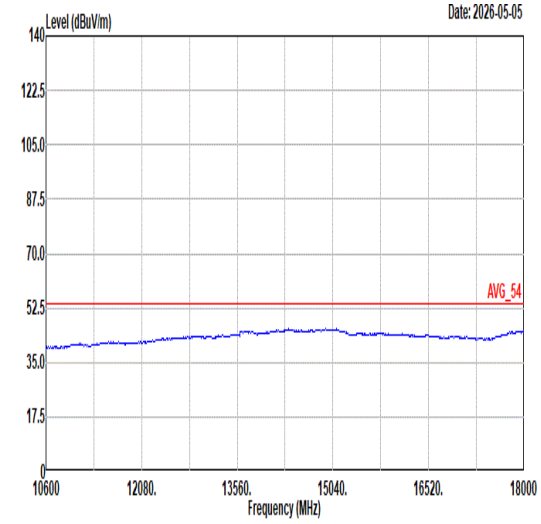 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	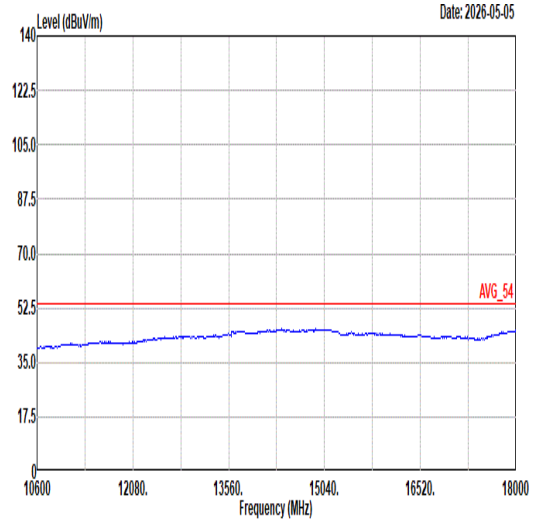 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	67	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	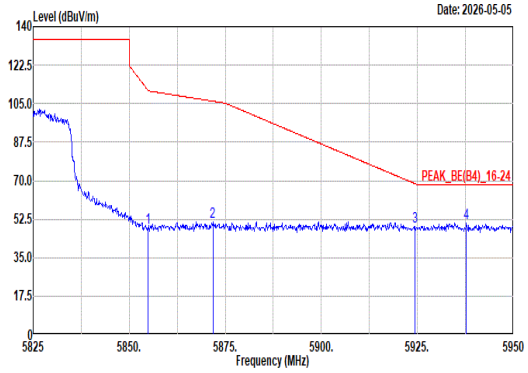 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5854.88 48.51 111.08 -62.57 35.90 33.61 12.61 34.74 1.13 100 67 Peak 2 5871.75 50.99 106.11 -55.12 38.34 33.64 12.65 34.75 1.11 100 67 Peak 3 5924.38 49.20 68.66 -19.46 36.53 33.65 12.78 34.80 1.04 100 67 Peak 4 5937.75 50.62 68.20 -17.58 37.98 33.62 12.81 34.81 1.02 100 67 Peak	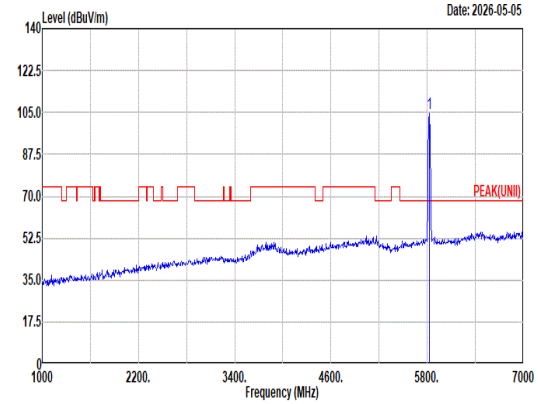 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5825.00 104.59 ------ ------ 91.90 33.70 12.53 34.71 1.17 100 67 Peak
Avg	Blank	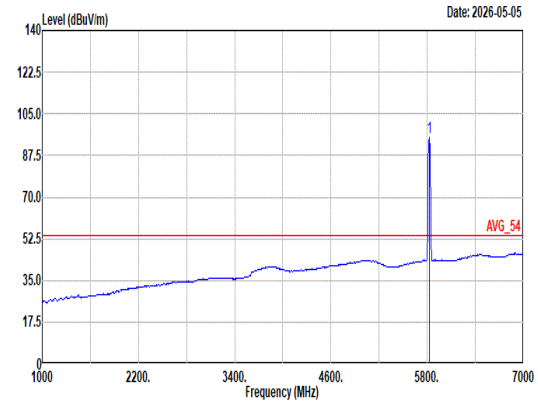 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5825.00 95.06 ------ ------ 82.37 33.70 12.53 34.71 1.17 100 67 Average

Mode	67
	Band Edge
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	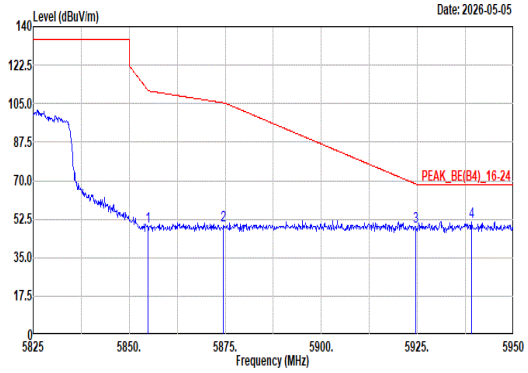 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.88 49.30 111.08 -61.78 36.69 33.61 12.61 34.74 1.13 101 5 Peak 2 5874.50 49.45 105.34 -55.89 36.80 33.65 12.66 34.76 1.10 101 5 Peak 3 5924.63 49.09 68.48 -19.39 36.42 33.65 12.78 34.80 1.04 101 5 Peak 4 5939.13 51.37 68.20 -16.83 38.73 33.62 12.82 34.82 1.02 101 5 Peak	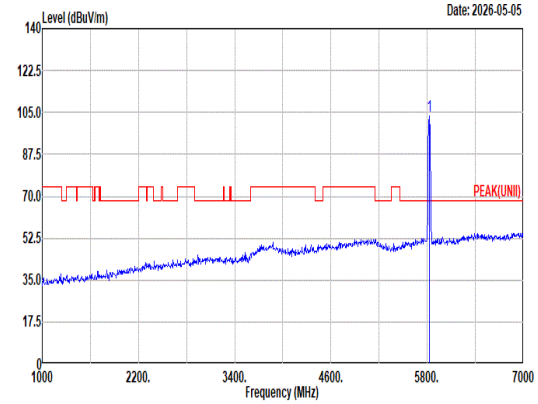 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 103.40 ------ ------ 90.71 33.70 12.53 34.71 1.17 101 5 Peak
Avg	Blank	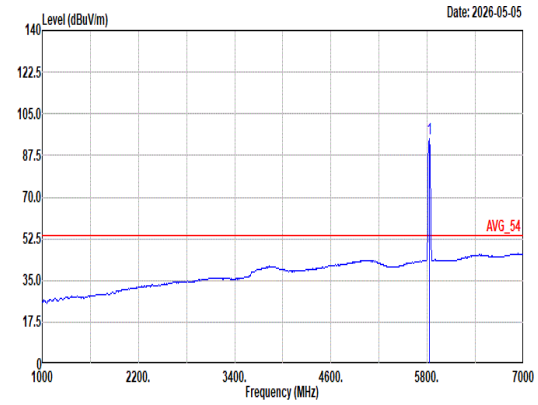 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 94.77 ------ ------ 82.08 33.70 12.53 34.71 1.17 101 5 Average

Mode	67	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	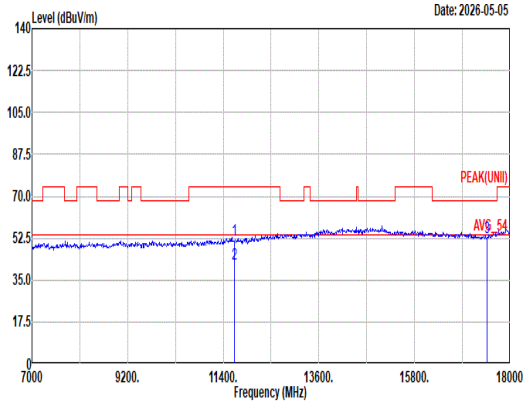 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 51.83 74.00 -22.17 33.86 39.00 17.96 40.37 1.38 -- -- Peak 2 11650.00 41.88 54.00 -12.12 23.91 39.00 17.96 40.37 1.38 -- -- Average 3 17475.00 53.03 68.20 -15.17 35.62 40.40 21.82 46.72 1.91 -- -- Peak	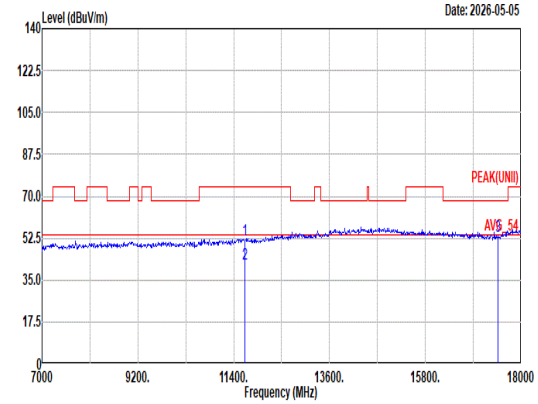 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 51.70 74.00 -22.30 33.73 39.00 17.96 40.37 1.38 -- -- Peak 2 11650.00 41.82 54.00 -12.18 23.85 39.00 17.96 40.37 1.38 -- -- Average 3 17475.00 53.55 68.20 -14.65 36.14 40.40 21.82 46.72 1.91 -- -- Peak

Mode	67	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	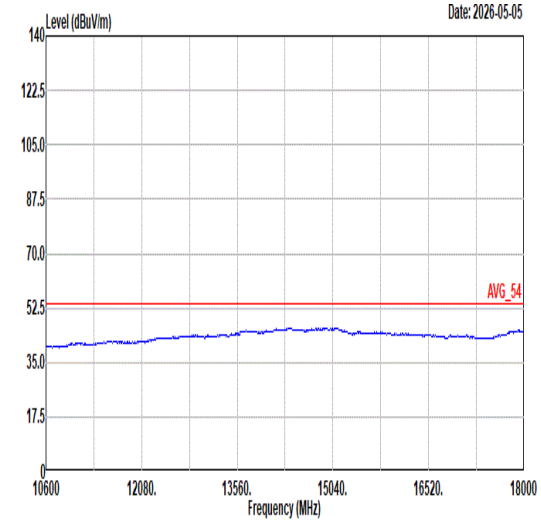 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	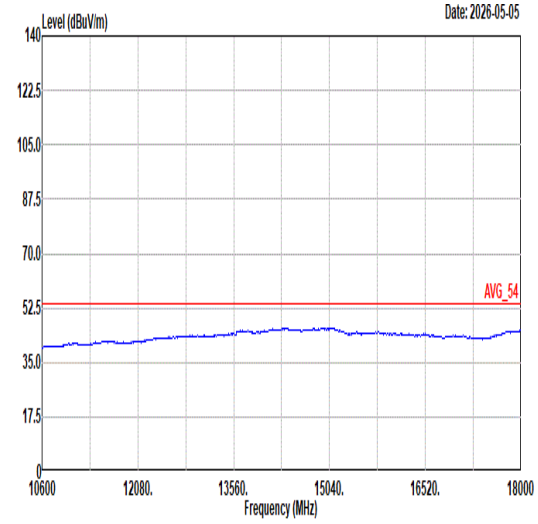 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	68
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	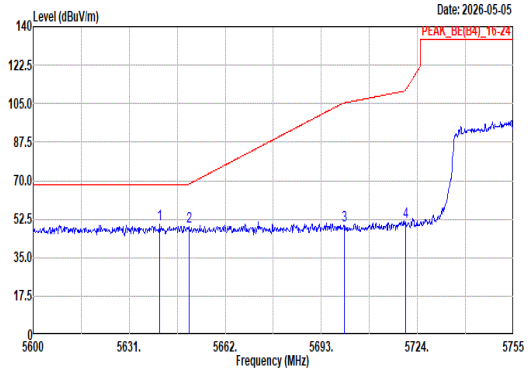 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5640.92 49.97 68.20 -18.23 38.04 33.13 12.43 34.55 0.92 101 79 Peak 2 5650.22 49.30 68.36 -19.06 37.29 33.20 12.43 34.56 0.94 101 79 Peak 3 5700.44 49.87 105.32 -55.45 37.29 33.70 12.45 34.60 1.03 101 79 Peak 4 5720.13 51.22 111.09 -59.87 38.63 33.70 12.45 34.62 1.06 101 79 Peak	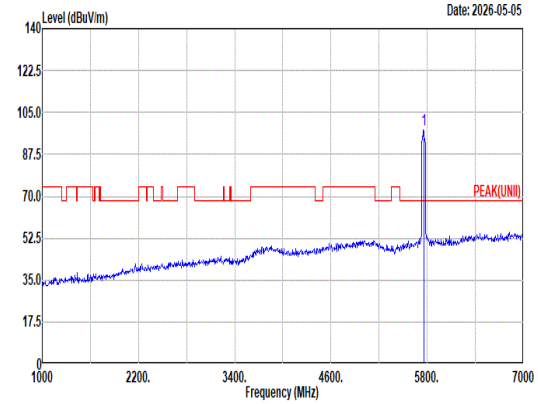 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 97.96 ------ ------ 85.33 33.70 12.46 34.65 1.12 101 79 Peak
Avg	Blank	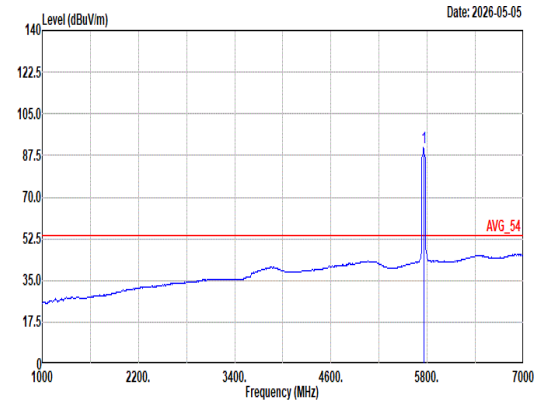 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 90.66 ------ ------ 78.03 33.70 12.46 34.65 1.12 101 79 Average

Mode	68	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	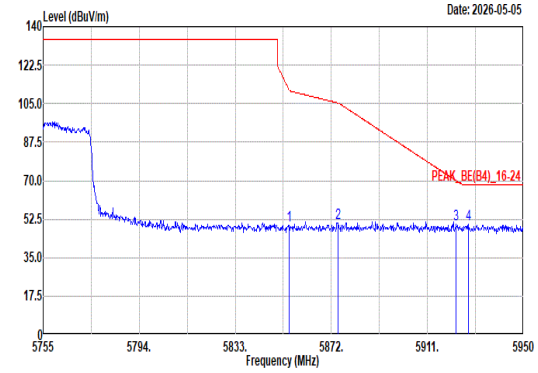 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 49.63 111.16 -61.53 37.02 33.61 12.61 34.74 1.13 101 79 Peak 2 5874.73 50.87 105.28 -54.41 38.22 33.65 12.66 34.76 1.10 101 79 Peak 3 5922.70 50.40 69.90 -19.50 37.73 33.65 12.78 34.80 1.04 101 79 Peak 4 5927.58 50.17 68.20 -18.03 37.51 33.64 12.79 34.80 1.03 101 79 Peak	Blank

Mode	68
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	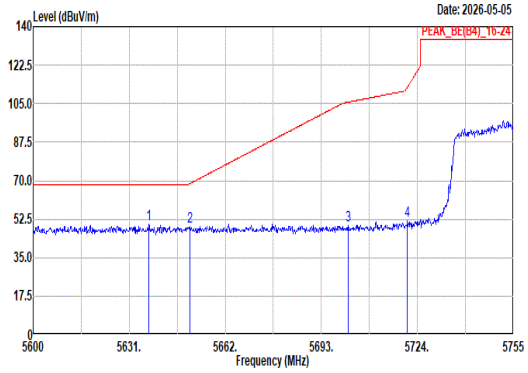 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5637.36 49.93 68.20 -18.27 38.02 33.10 12.43 34.54 0.92 100 30 Peak 2 5650.69 49.18 68.71 -19.53 37.16 33.21 12.43 34.56 0.94 100 30 Peak 3 5701.68 49.44 105.67 -56.23 36.86 33.70 12.45 34.60 1.03 100 30 Peak 4 5720.75 51.76 112.50 -60.74 39.17 33.70 12.45 34.62 1.06 100 30 Peak	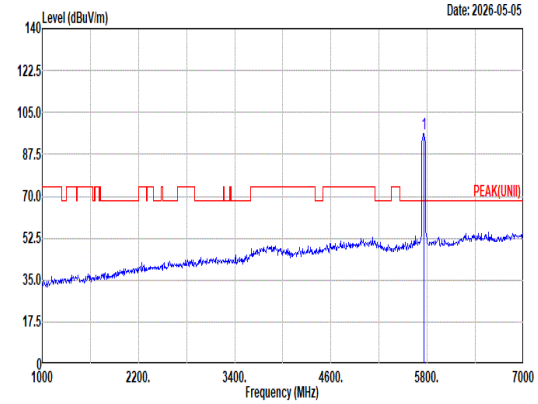 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 96.36 ------ ------ 83.70 33.72 12.46 34.65 1.13 100 30 Peak
Avg	Blank	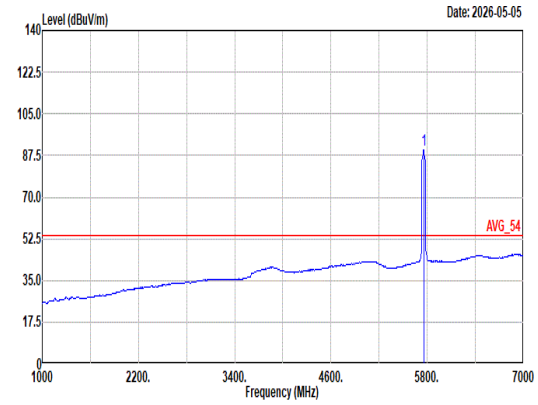 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 89.98 ------ ------ 77.32 33.72 12.46 34.65 1.13 100 30 Average

Mode	68	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	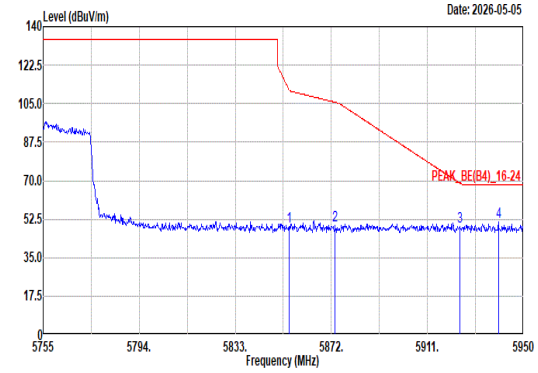 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 49.23 111.16 -61.93 36.62 33.61 12.61 34.74 1.13 100 30 Peak 2 5873.56 49.46 105.60 -56.14 36.82 33.65 12.65 34.76 1.10 100 30 Peak 3 5924.26 49.33 68.75 -19.42 36.66 33.65 12.78 34.80 1.04 100 30 Peak 4 5939.86 51.03 68.20 -17.17 38.39 33.62 12.82 34.82 1.02 100 30 Peak	Blank

Mode	68	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	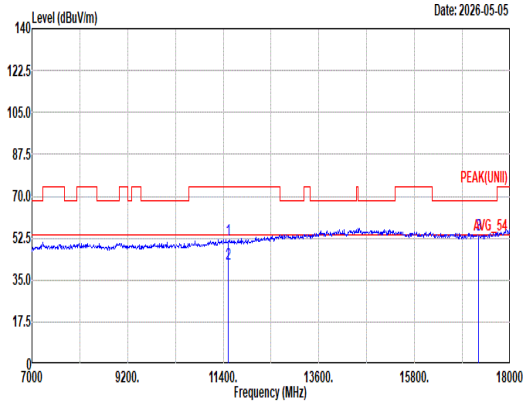 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 51.67 74.00 -22.33 33.74 38.92 17.88 40.24 1.37 -- -- Peak 2 11510.00 41.87 54.00 -12.13 23.94 38.92 17.88 40.24 1.37 -- -- Average 3 17265.00 54.14 68.20 -14.06 36.73 40.20 21.80 46.52 1.93 -- -- Peak	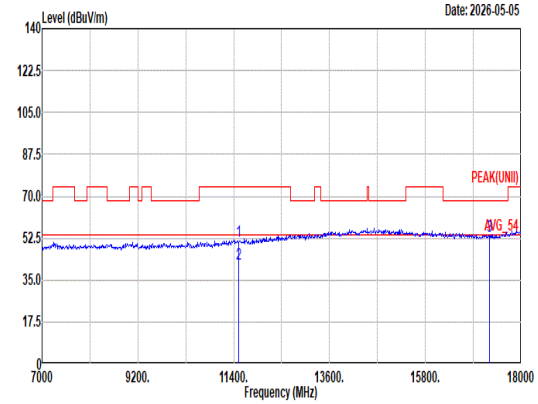 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 51.39 74.00 -22.61 33.46 38.92 17.88 40.24 1.37 -- -- Peak 2 11510.00 41.73 54.00 -12.27 23.80 38.92 17.88 40.24 1.37 -- -- Average 3 17265.00 53.50 68.20 -14.70 36.09 40.20 21.80 46.52 1.93 -- -- Peak

Mode	68	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	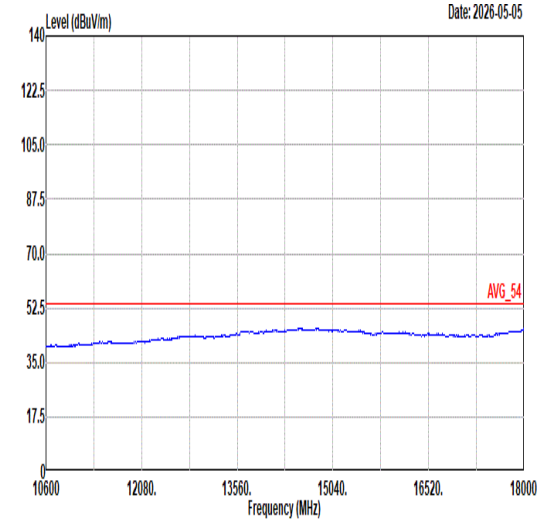 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	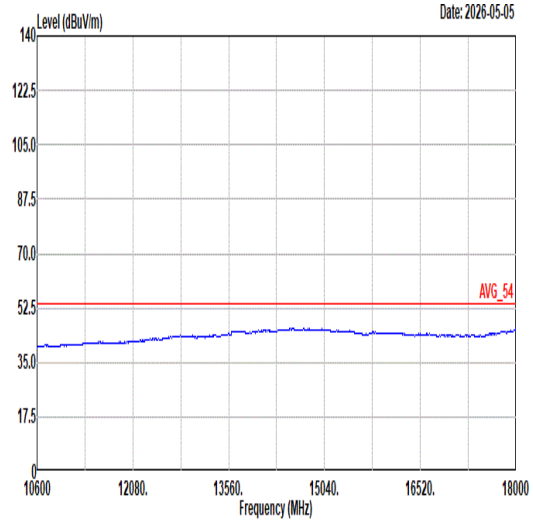 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	69
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	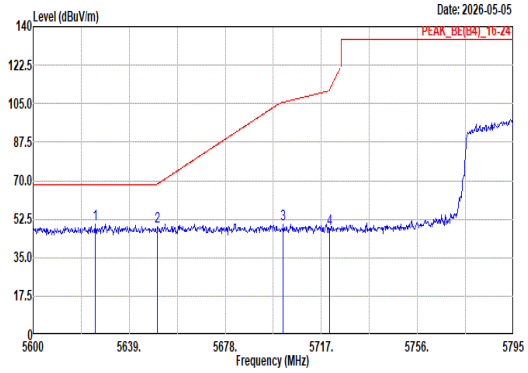 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5625.35 50.24 68.20 -17.96 38.45 33.00 12.43 34.53 0.89 100 78 Peak 2 5650.51 49.10 68.58 -19.48 37.08 33.21 12.43 34.56 0.94 100 78 Peak 3 5701.60 50.01 105.65 -55.64 37.43 33.70 12.45 34.60 1.03 100 78 Peak 4 5720.32 47.92 111.52 -63.60 35.33 33.70 12.45 34.62 1.06 100 78 Peak	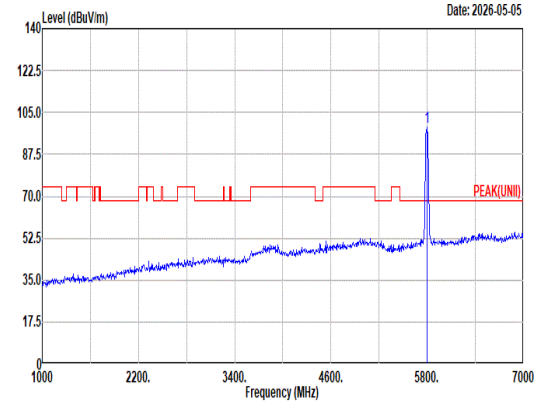 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 98.77 ------ ------ 86.00 33.79 12.47 34.68 1.19 100 78 Peak
Avg	Blank	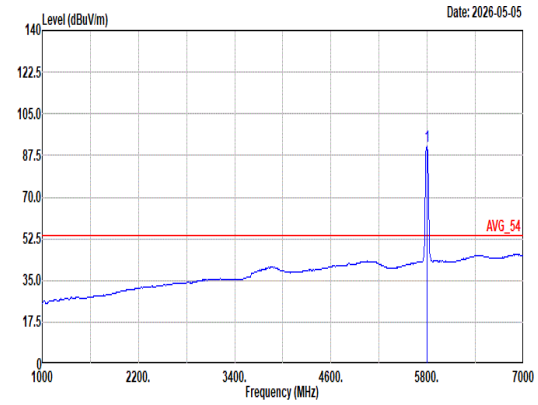 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 91.40 ------ ------ 78.63 33.79 12.47 34.68 1.19 100 78 Average

Mode	69	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	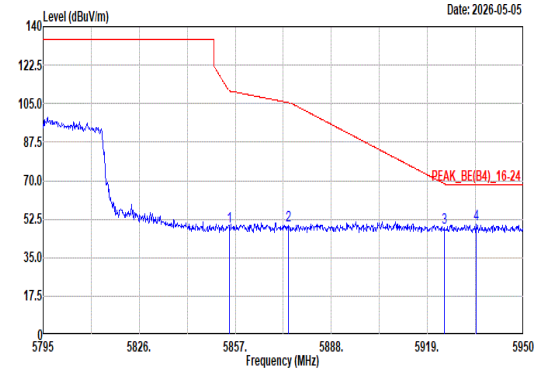 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.99 49.37 110.83 -61.46 36.76 33.61 12.61 34.74 1.13 100 78 Peak 2 5874.21 49.90 105.42 -55.52 37.25 33.65 12.66 34.76 1.10 100 78 Peak 3 5924.43 48.83 68.62 -19.79 36.16 33.65 12.78 34.80 1.04 100 78 Peak 4 5934.66 49.95 68.20 -18.25 37.30 33.63 12.81 34.81 1.02 100 78 Peak	Blank

Mode	69
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	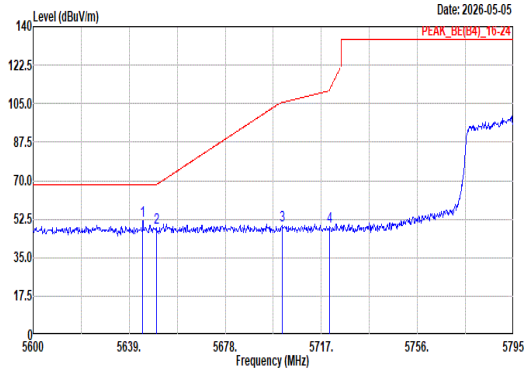 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5644.46 51.83 68.20 -16.37 39.86 33.16 12.43 34.55 0.93 100 26 Peak 2 5650.12 48.64 68.29 -19.65 36.63 33.20 12.43 34.56 0.94 100 26 Peak 3 5701.01 49.47 105.48 -56.01 36.89 33.70 12.45 34.60 1.03 100 26 Peak 4 5720.32 49.23 111.52 -62.29 36.64 33.70 12.45 34.62 1.06 100 26 Peak	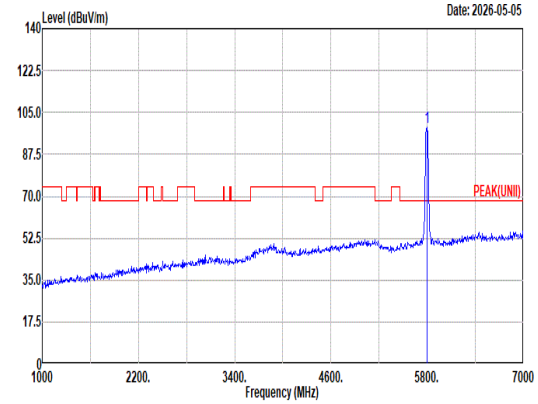 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 99.04 ------ ------ 86.27 33.79 12.47 34.68 1.19 100 26 Peak
Avg	Blank	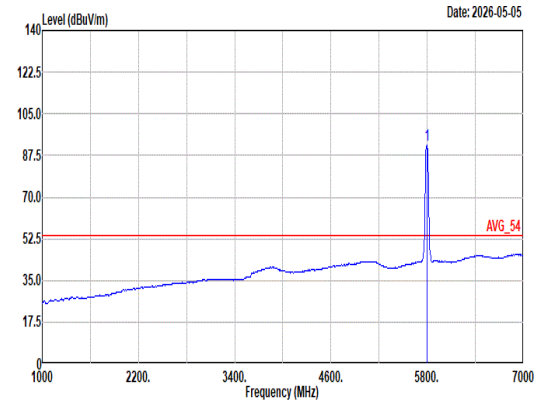 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 91.98 ------ ------ 79.21 33.79 12.47 34.68 1.19 100 26 Average

Mode	69	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	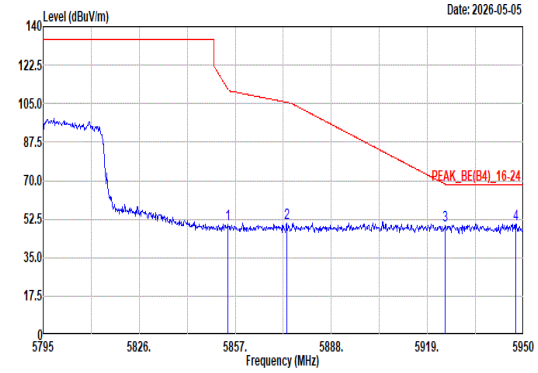 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.52 50.19 111.89 -61.70 37.58 33.61 12.61 34.74 1.13 100 26 Peak 2 5873.59 50.48 105.60 -55.12 37.84 33.65 12.65 34.76 1.10 100 26 Peak 3 5924.74 49.43 68.40 -18.97 36.76 33.65 12.78 34.80 1.04 100 26 Peak 4 5947.52 50.42 68.20 -17.78 37.79 33.60 12.84 34.82 1.01 100 26 Peak	Blank

Mode	69	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	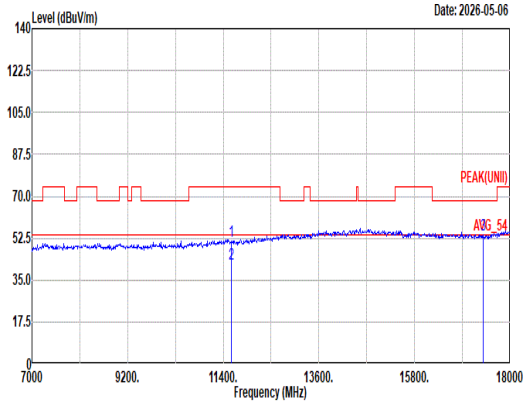 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 51.34 74.00 -22.66 33.35 39.00 17.92 40.31 1.38 -- -- Peak 2 11590.00 41.48 54.00 -12.52 23.49 39.00 17.92 40.31 1.38 -- -- Average 3 17385.00 53.77 68.20 -14.43 36.40 40.27 21.81 46.63 1.92 -- -- Peak	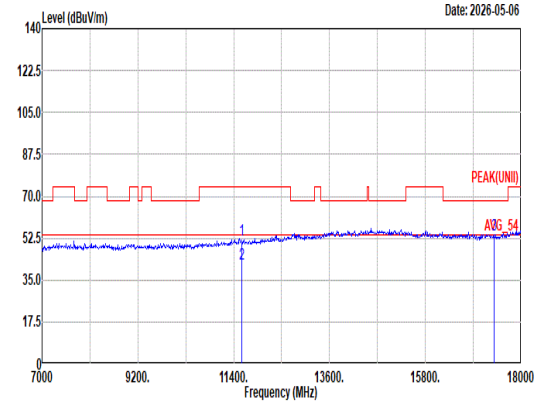 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 51.85 74.00 -22.15 33.86 39.00 17.92 40.31 1.38 -- -- Peak 2 11590.00 41.94 54.00 -12.06 23.95 39.00 17.92 40.31 1.38 -- -- Average 3 17385.00 53.70 68.20 -14.50 36.33 40.27 21.81 46.63 1.92 -- -- Peak

Mode	69	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	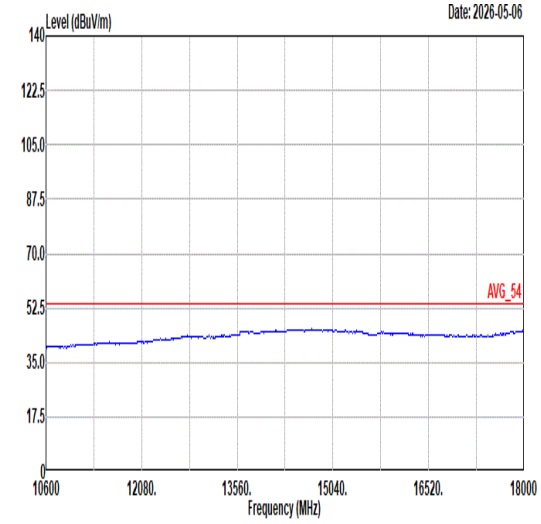 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	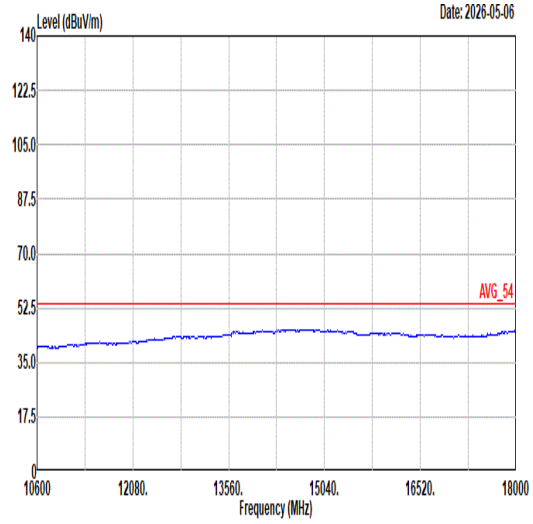 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	70
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	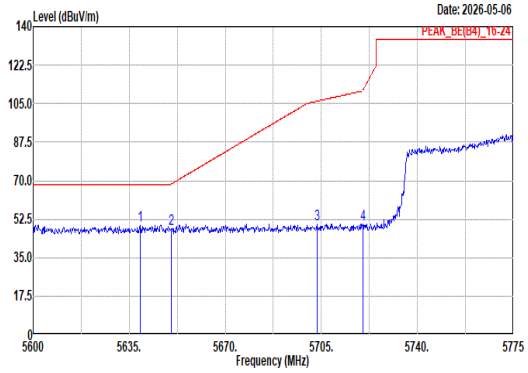 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5639.03 49.84 68.20 -18.36 37.93 33.11 12.43 34.55 0.92 100 82 Peak 2 5650.23 47.91 68.37 -20.46 35.90 33.20 12.43 34.56 0.94 100 82 Peak 3 5703.43 50.40 106.16 -55.76 37.82 33.70 12.45 34.60 1.03 100 82 Peak 4 5720.05 50.00 110.91 -60.91 37.41 33.70 12.45 34.62 1.06 100 82 Peak	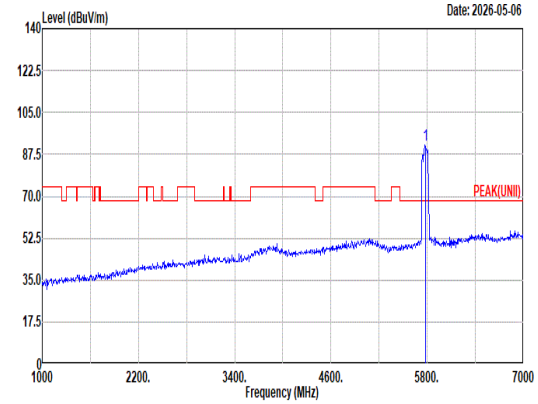 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 91.55 ------ ------ 78.86 33.74 12.46 34.66 1.15 100 82 Peak
Avg	Blank	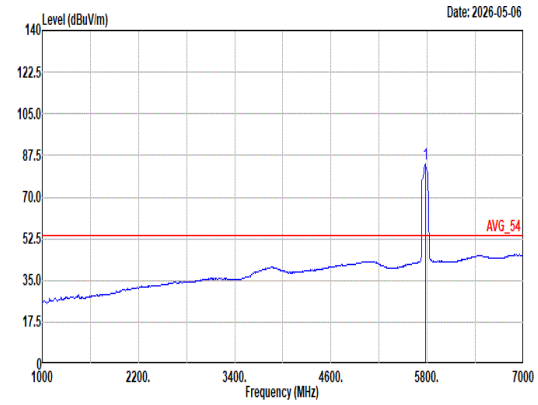 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 83.78 ------ ------ 71.08 33.75 12.46 34.67 1.16 100 82 Average

Mode	70	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	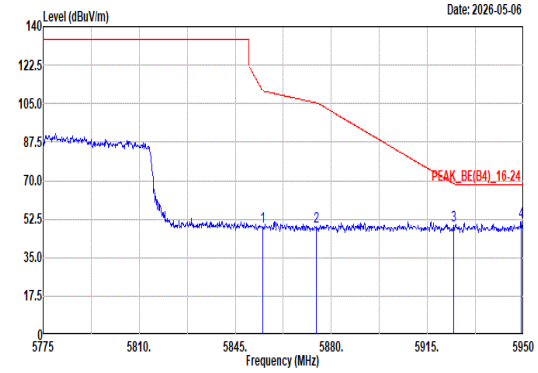 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 49.29 110.86 -61.57 36.68 33.61 12.61 34.74 1.13 100 82 Peak 2 5874.40 49.24 105.37 -56.13 36.59 33.65 12.66 34.76 1.10 100 82 Peak 3 5924.45 49.47 68.61 -19.14 36.80 33.65 12.78 34.80 1.04 100 82 Peak 4 5949.13 51.06 68.20 -17.14 38.43 33.60 12.84 34.82 1.01 100 82 Peak	Blank

Mode	70
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	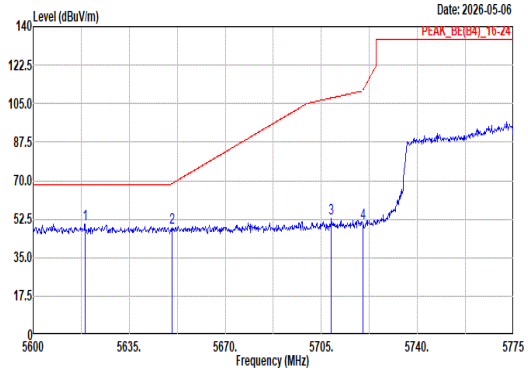 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5618.90 50.35 68.20 -17.85 38.63 32.95 12.42 34.53 0.88 100 26 Peak 2 5650.58 48.54 68.63 -20.09 36.52 33.21 12.43 34.56 0.94 100 26 Peak 3 5708.68 52.77 107.63 -54.86 40.19 33.70 12.45 34.61 1.04 100 26 Peak 4 5720.05 50.76 110.91 -60.15 38.17 33.70 12.45 34.62 1.06 100 26 Peak	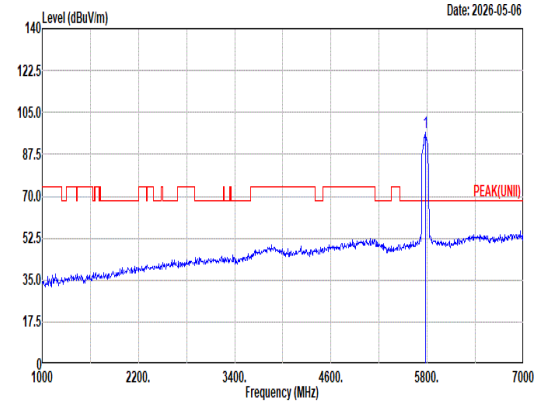 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 96.86 ------ ------ 84.16 33.75 12.46 34.67 1.16 100 26 Peak
Avg	Blank	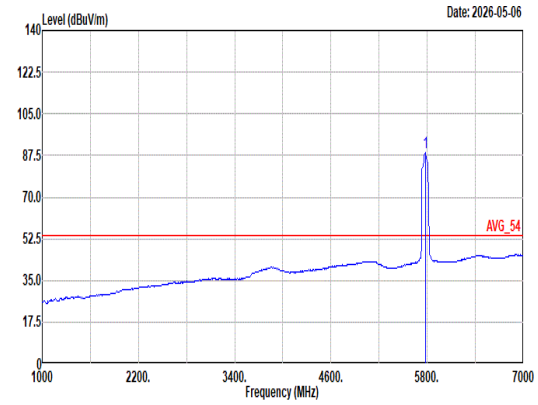 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 88.53 ------ ------ 75.83 33.75 12.46 34.67 1.16 100 26 Average

Mode	70	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	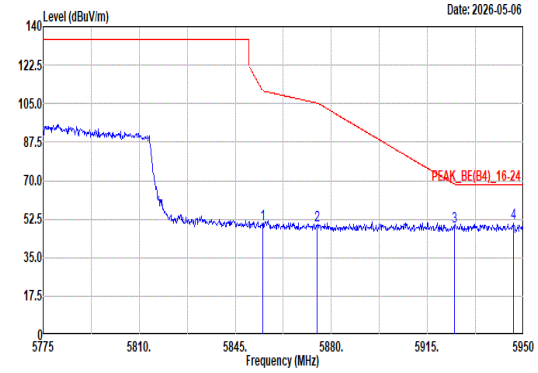 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 50.32 110.86 -60.54 37.71 33.61 12.61 34.74 1.13 100 26 Peak 2 5874.75 49.85 105.27 -55.42 37.20 33.65 12.66 34.76 1.10 100 26 Peak 3 5924.98 49.26 68.22 -18.96 36.59 33.65 12.78 34.80 1.04 100 26 Peak 4 5946.33 50.78 68.20 -17.42 38.14 33.61 12.84 34.82 1.01 100 26 Peak	Blank

Mode	70	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	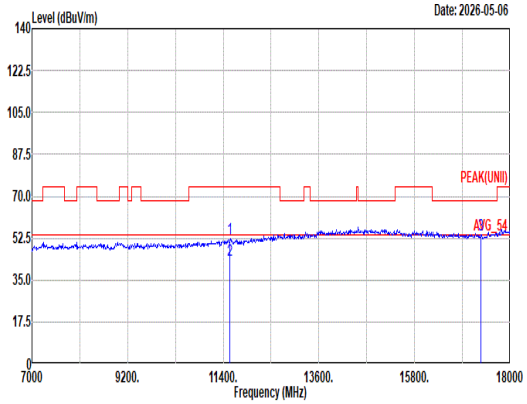 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 52.46 74.00 -21.54 34.47 39.00 17.90 40.28 1.37 -- -- Peak 2 11550.00 43.21 54.00 -10.79 25.22 39.00 17.90 40.28 1.37 -- -- Average 3 17325.00 53.92 68.20 -14.28 36.58 40.20 21.80 46.58 1.92 -- -- Peak	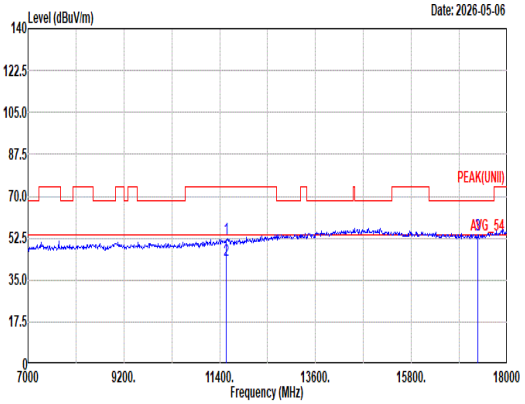 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 52.48 74.00 -21.52 34.49 39.00 17.90 40.28 1.37 -- -- Peak 2 11550.00 43.26 54.00 -10.74 25.27 39.00 17.90 40.28 1.37 -- -- Average 3 17325.00 53.96 68.20 -14.24 36.62 40.20 21.80 46.58 1.92 -- -- Peak

Mode	70	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	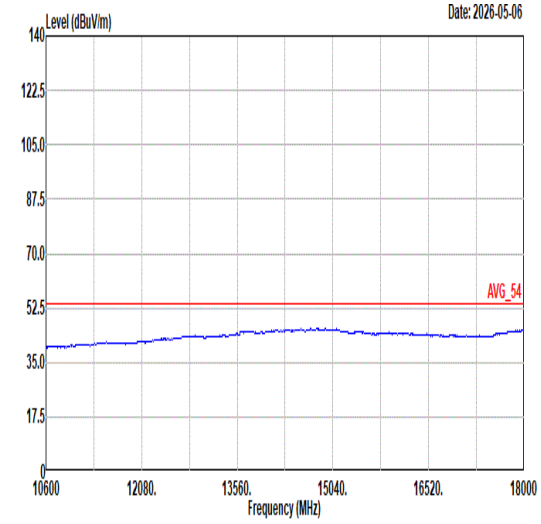 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	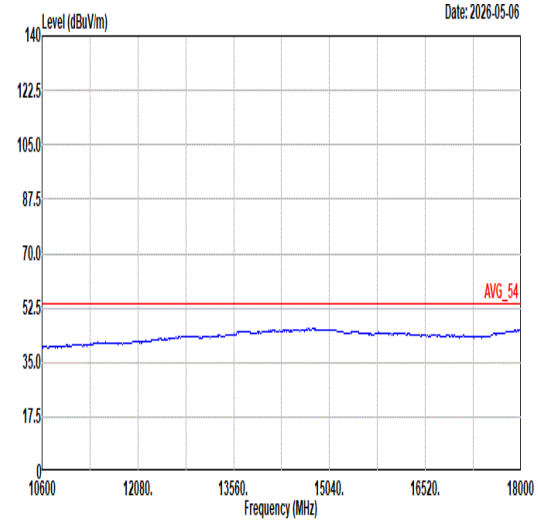 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	71
	Band Edge
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	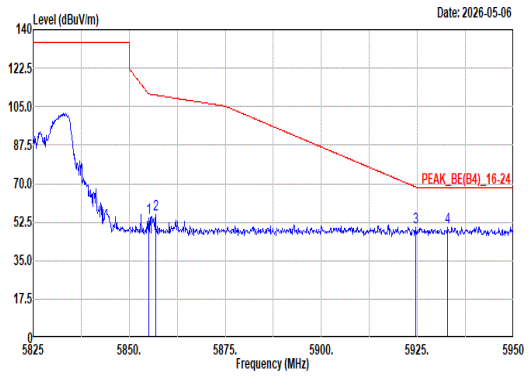 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 54.68 110.80 -56.12 42.07 33.61 12.61 34.74 1.13 100 66 Peak 2 5856.88 55.90 110.27 -54.37 43.29 33.61 12.61 34.74 1.13 100 66 Peak 3 5924.63 50.27 68.48 -18.21 37.60 33.65 12.78 34.80 1.04 100 66 Peak 4 5932.75 50.23 68.20 -17.97 37.58 33.63 12.80 34.81 1.03 100 66 Peak	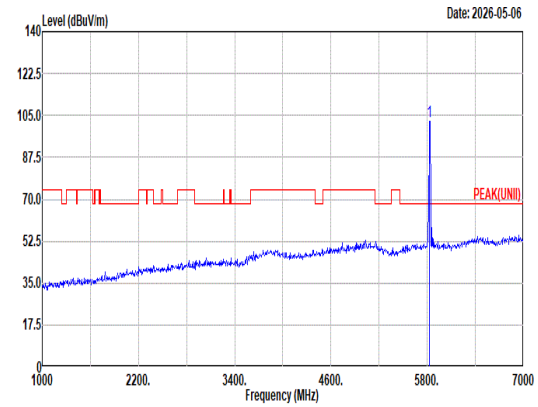 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 102.72 ------ ------ 90.05 33.68 12.55 34.72 1.16 100 66 Peak
Avg	Blank	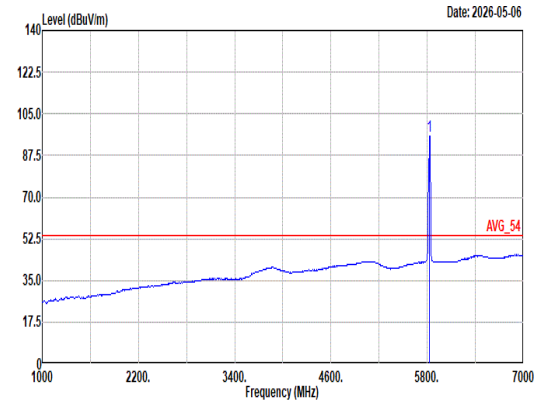 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 95.63 ------ ------ 82.96 33.68 12.55 34.72 1.16 100 66 Average

Mode	71
	Band Edge
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	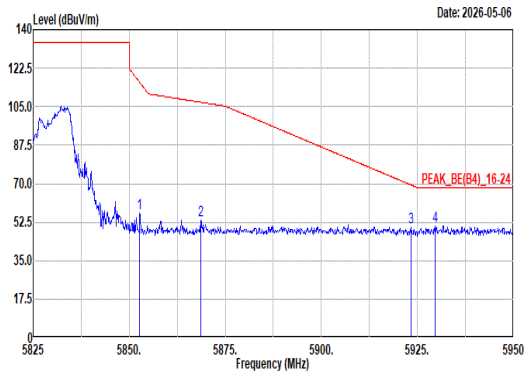 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5852.75 56.41 115.93 -59.52 43.81 33.61 12.60 34.74 1.13 100 10 Peak 2 5868.63 53.35 106.98 -53.63 40.71 33.64 12.64 34.75 1.11 100 10 Peak 3 5923.38 50.38 69.40 -19.02 37.71 33.65 12.78 34.80 1.04 100 10 Peak 4 5929.63 50.65 68.20 -17.55 38.00 33.64 12.79 34.81 1.03 100 10 Peak	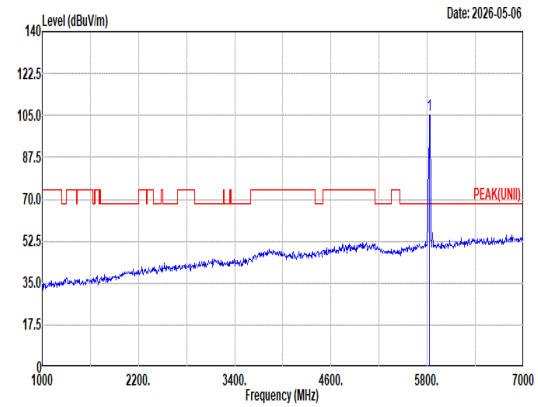 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 105.36 ------ ------ 92.71 33.66 12.56 34.72 1.15 100 10 Peak
Avg	Blank	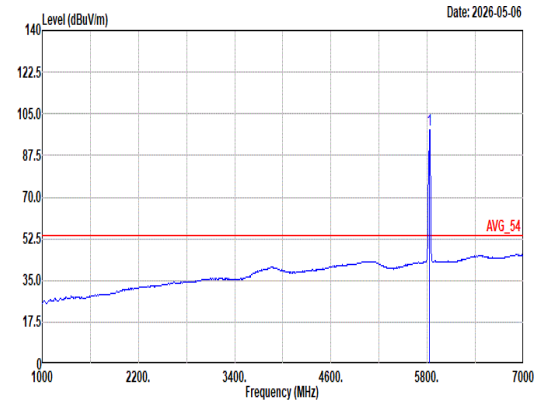 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 98.28 ------ ------ 85.63 33.66 12.56 34.72 1.15 100 10 Average

Mode	71	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	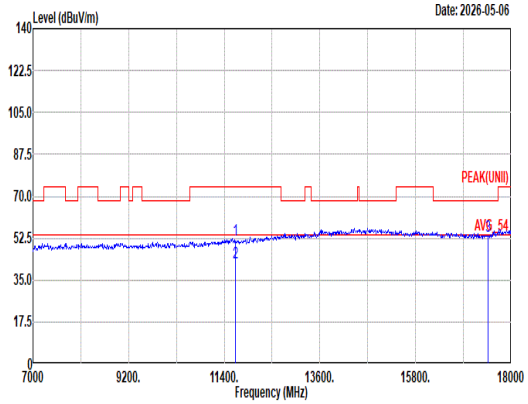 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 51.62 74.00 -22.38 33.65 39.00 17.96 40.37 1.38 -- -- Peak 2 11650.00 42.50 54.00 -11.50 24.53 39.00 17.96 40.37 1.38 -- -- Average 3 17475.00 53.42 68.20 -14.78 36.01 40.40 21.82 46.72 1.91 -- -- Peak	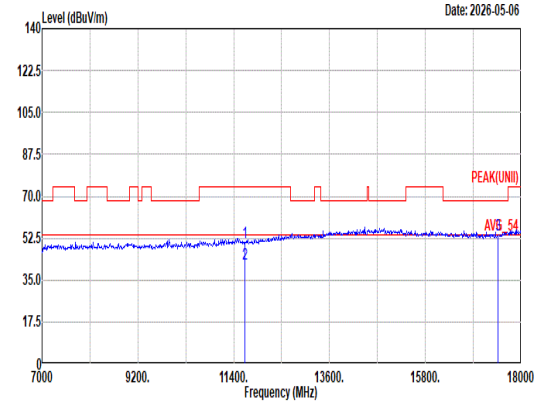 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 50.81 74.00 -23.19 32.84 39.00 17.96 40.37 1.38 -- -- Peak 2 11650.00 41.56 54.00 -12.44 23.59 39.00 17.96 40.37 1.38 -- -- Average 3 17475.00 54.05 68.20 -14.15 36.64 40.40 21.82 46.72 1.91 -- -- Peak

Mode	71	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	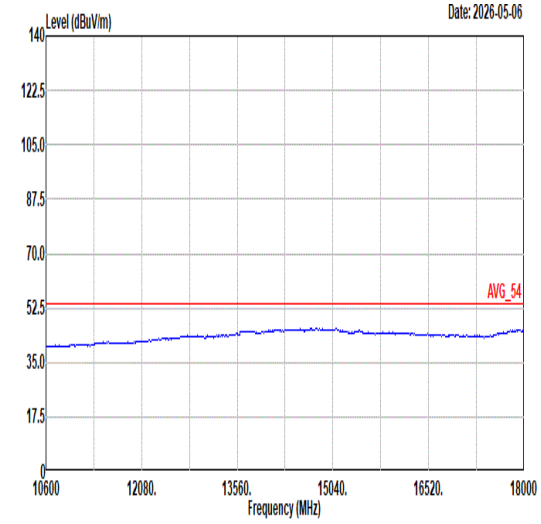 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	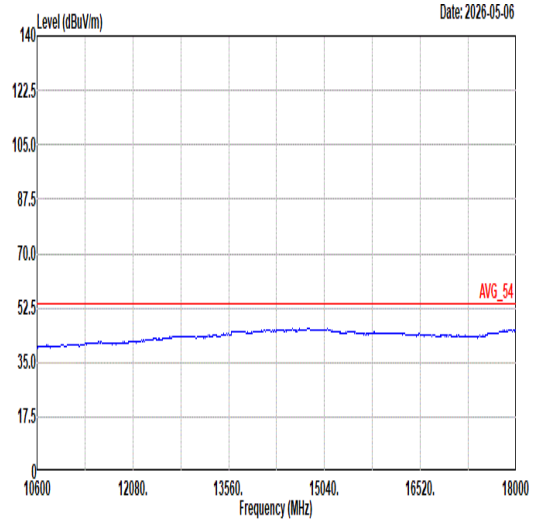 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	72
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	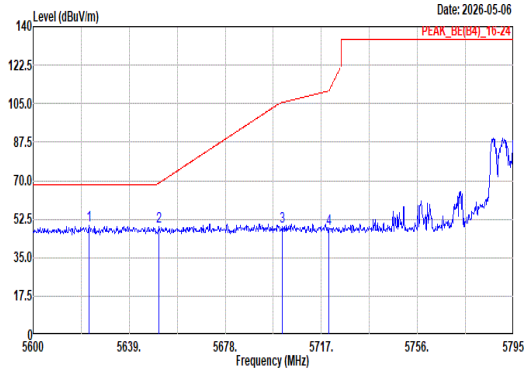 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5622.82 49.50 68.20 -18.70 37.73 32.98 12.43 34.53 0.89 100 36 Peak 2 5651.09 49.37 69.01 -19.64 37.35 33.21 12.43 34.56 0.94 100 36 Peak 3 5701.01 49.37 105.48 -56.11 36.79 33.70 12.45 34.60 1.03 100 36 Peak 4 5720.12 48.10 111.07 -62.97 35.51 33.70 12.45 34.62 1.06 100 36 Peak	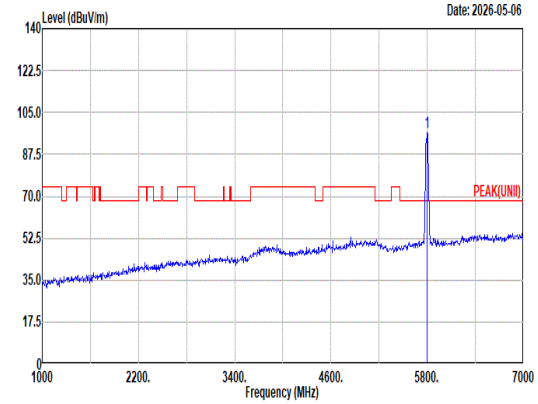 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 96.54 ------ ------ 83.76 33.80 12.47 34.69 1.20 100 36 Peak
Avg	Blank	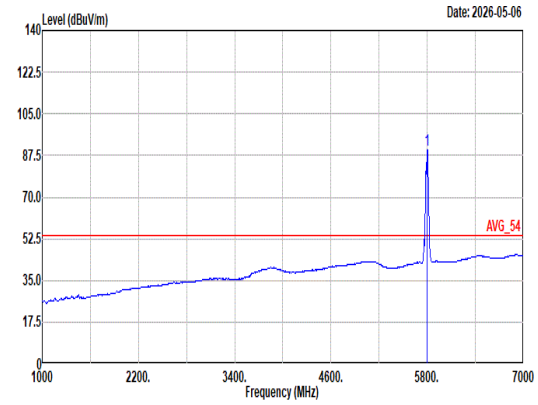 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 89.71 ------ ------ 76.94 33.79 12.47 34.68 1.19 100 36 Average

Mode	72	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	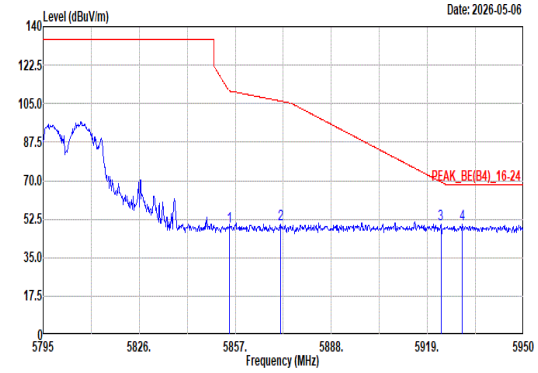 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.99 49.23 110.83 -61.60 36.62 33.61 12.61 34.74 1.13 100 36 Peak 2 5871.73 50.43 106.12 -55.69 37.78 33.64 12.65 34.75 1.11 100 36 Peak 3 5923.34 50.07 69.42 -19.35 37.40 33.65 12.78 34.80 1.04 100 36 Peak 4 5930.32 50.07 68.20 -18.13 37.41 33.64 12.80 34.81 1.03 100 36 Peak	Blank

Mode	72
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	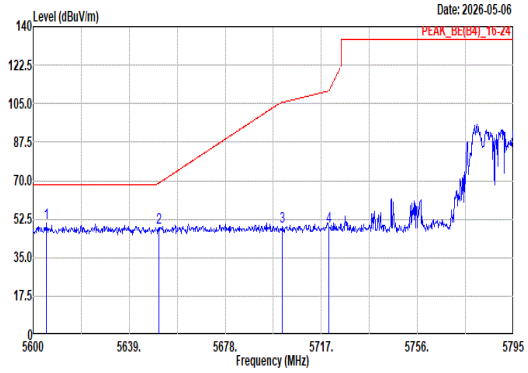 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5605.46 50.56 68.20 -17.64 38.95 32.84 12.42 34.51 0.86 100 22 Peak 2 5650.90 48.56 68.87 -20.31 36.54 33.21 12.43 34.56 0.94 100 22 Peak 3 5701.21 49.05 105.54 -56.49 36.47 33.70 12.45 34.60 1.03 100 22 Peak 4 5720.12 49.05 111.07 -62.02 36.46 33.70 12.45 34.62 1.06 100 22 Peak	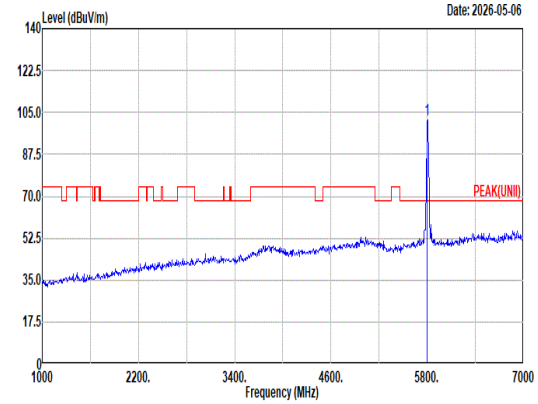 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 101.81 ------ ------ 89.06 33.78 12.48 34.70 1.19 100 22 Peak
Avg	Blank	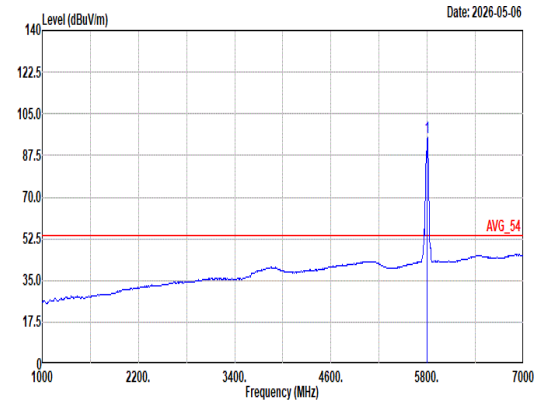 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 95.02 ------ ------ 82.27 33.78 12.48 34.70 1.19 100 22 Average

Mode	72	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	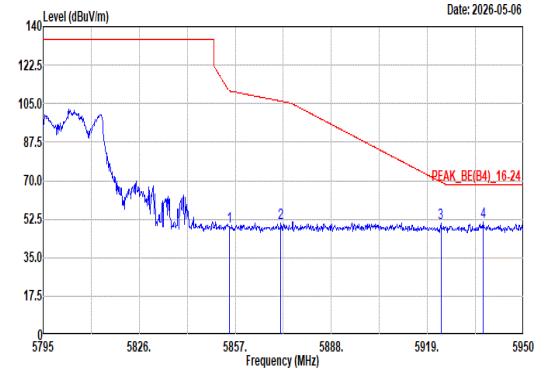 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.99 49.34 110.83 -61.49 36.73 33.61 12.61 34.74 1.13 100 22 Peak 2 5871.73 50.47 106.12 -55.65 37.82 33.64 12.65 34.75 1.11 100 22 Peak 3 5923.34 50.60 69.42 -18.82 37.93 33.65 12.78 34.80 1.04 100 22 Peak 4 5936.98 51.41 68.20 -16.79 38.76 33.63 12.81 34.81 1.02 100 22 Peak	Blank

Mode	72	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	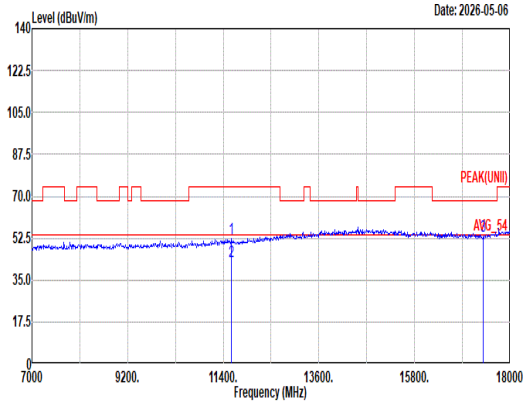 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 52.09 74.00 -21.91 34.10 39.00 17.92 40.31 1.38 -- -- Peak 2 11590.00 42.76 54.00 -11.24 24.77 39.00 17.92 40.31 1.38 -- -- Average 3 17385.00 53.44 68.20 -14.76 36.07 40.27 21.81 46.63 1.92 -- -- Peak	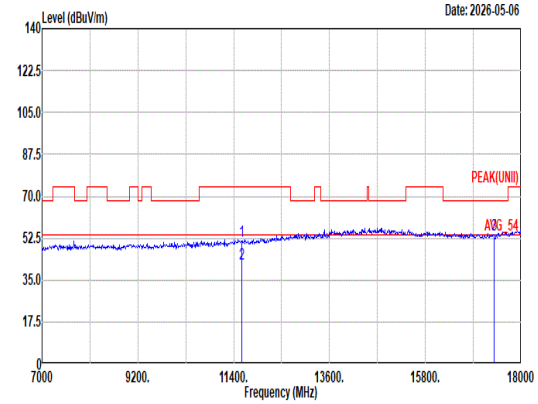 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 51.30 74.00 -22.70 33.31 39.00 17.92 40.31 1.38 -- -- Peak 2 11590.00 41.99 54.00 -12.01 24.00 39.00 17.92 40.31 1.38 -- -- Average 3 17385.00 53.97 68.20 -14.23 36.60 40.27 21.81 46.63 1.92 -- -- Peak

Mode	72	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Partial RU 242/62_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	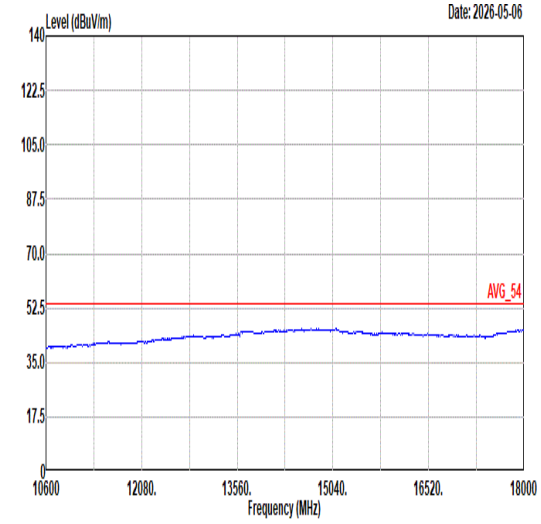 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	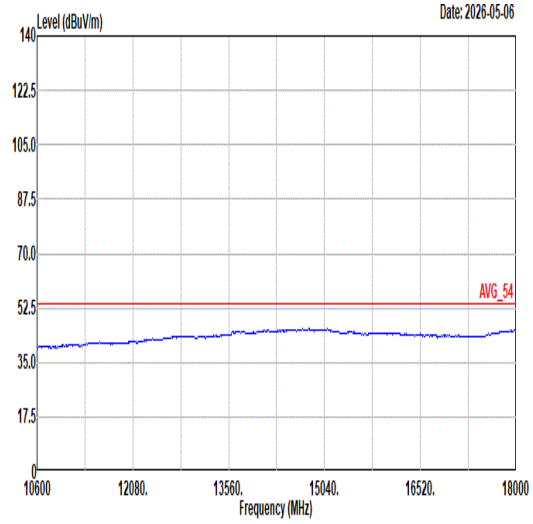 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	73
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Partial RU 484/66_5775MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	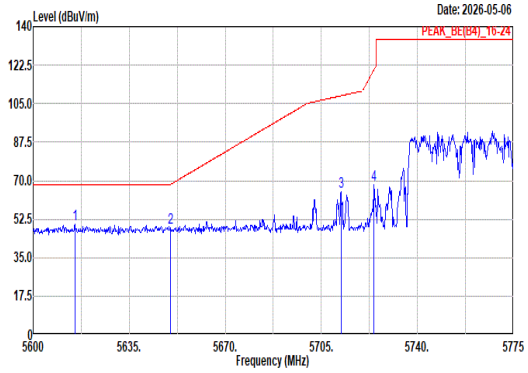 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5615.23 50.15 68.20 -18.05 38.45 32.92 12.42 34.52 0.88 277 104 Peak 2 5650.05 48.35 68.24 -19.89 36.34 33.20 12.43 34.56 0.94 277 104 Peak 3 5712.18 64.75 108.61 -43.86 52.16 33.70 12.45 34.61 1.05 277 104 Peak 4 5724.25 68.09 120.49 -52.40 55.49 33.70 12.45 34.62 1.07 277 104 Peak	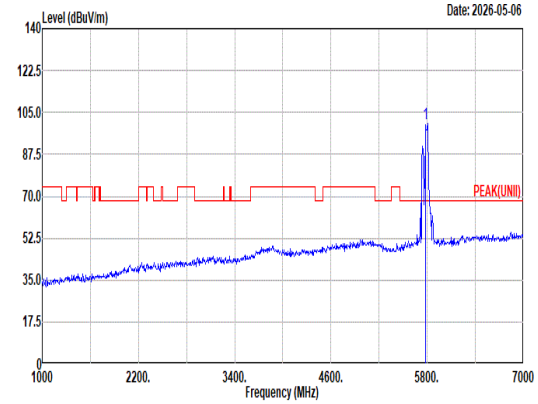 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 100.24 ------ ------ 87.49 33.78 12.48 34.70 1.19 277 104 Peak
Avg	Blank	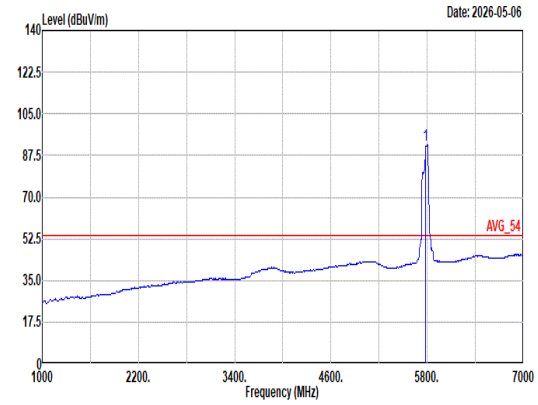 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 92.13 ------ ------ 79.40 33.75 12.50 34.70 1.18 277 104 Average

Mode	73	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Partial RU 484/66_5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	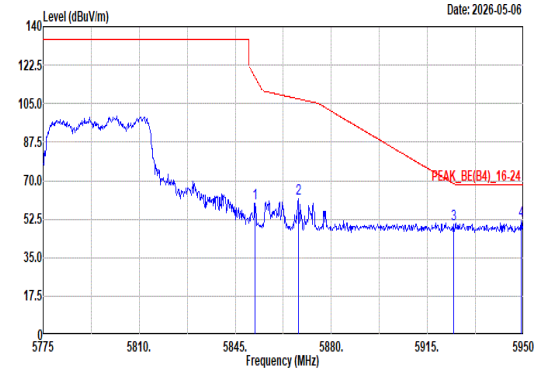 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5852.18 59.50 117.24 -57.74 46.91 33.60 12.60 34.74 1.13 277 104 Peak 2 5867.93 61.63 107.18 -45.55 48.99 33.64 12.64 34.75 1.11 277 104 Peak 3 5924.45 50.10 68.61 -18.51 37.43 33.65 12.78 34.80 1.04 277 104 Peak 4 5949.13 51.81 68.20 -16.39 39.18 33.60 12.84 34.82 1.01 277 104 Peak	Blank

Mode	73
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Partial RU 484/66_5775MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	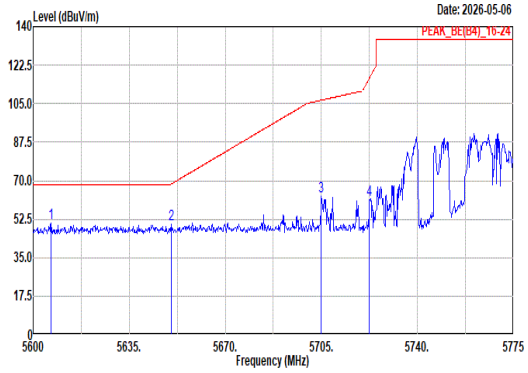 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5606.48 50.50 68.20 -17.70 38.89 32.85 12.42 34.52 0.86 100 23 Peak 2 5650.23 50.10 68.37 -18.27 38.09 33.20 12.43 34.56 0.94 100 23 Peak 3 5705.00 62.64 106.60 -43.96 50.06 33.70 12.45 34.60 1.03 100 23 Peak 4 5722.50 61.54 116.50 -54.96 48.95 33.70 12.45 34.62 1.06 100 23 Peak	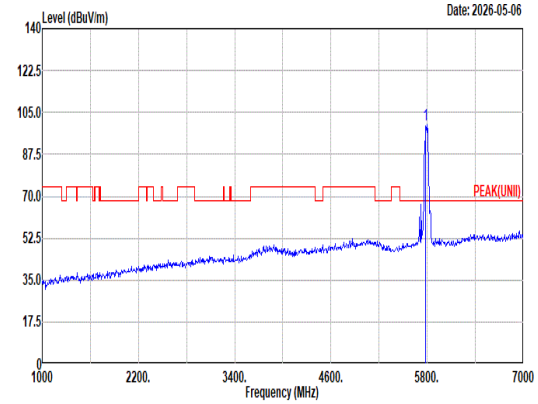 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 99.93 ------ ------ 87.16 33.79 12.47 34.68 1.19 100 23 Peak
Avg	Blank	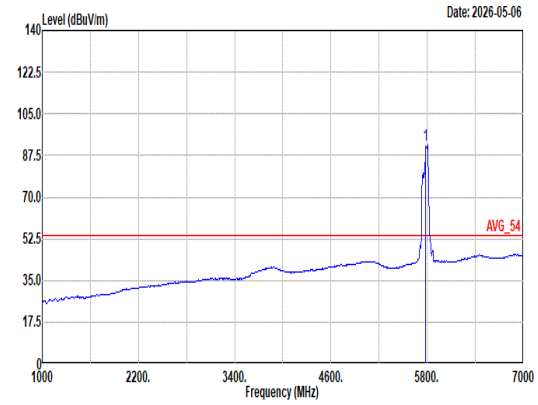 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 91.69 ------ ------ 78.94 33.78 12.48 34.70 1.19 100 23 Average

Mode	73	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Partial RU 484/66_5775MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	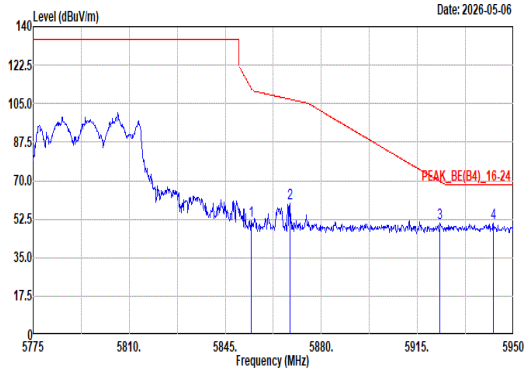 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.45 51.54 112.05 -60.51 38.93 33.61 12.61 34.74 1.13 100 23 Peak 2 5868.45 59.46 107.03 -47.57 46.82 33.64 12.64 34.75 1.11 100 23 Peak 3 5923.23 50.67 69.51 -18.84 38.00 33.65 12.78 34.80 1.04 100 23 Peak 4 5942.65 50.48 68.20 -17.72 37.85 33.61 12.83 34.82 1.01 100 23 Peak	Blank

Mode	73	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Partial RU 484/66_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	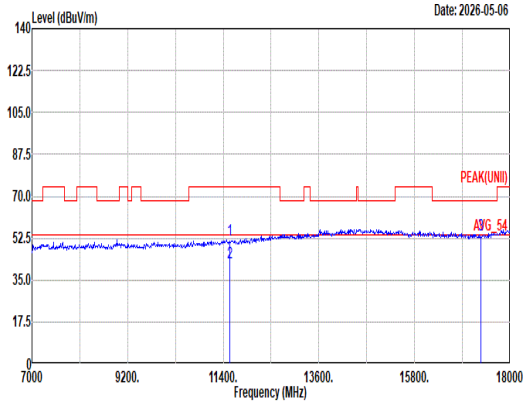 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 51.67 74.00 -22.33 33.68 39.00 17.90 40.28 1.37 -- -- Peak 2 11550.00 42.47 54.00 -11.53 24.48 39.00 17.90 40.28 1.37 -- -- Average 3 17325.00 53.75 68.20 -14.45 36.41 40.20 21.80 46.58 1.92 -- -- Peak	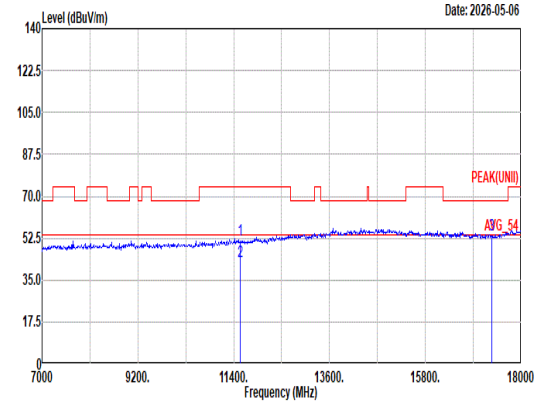 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 51.88 74.00 -22.12 33.89 39.00 17.90 40.28 1.37 -- -- Peak 2 11550.00 42.57 54.00 -11.43 24.58 39.00 17.90 40.28 1.37 -- -- Average 3 17325.00 53.86 68.20 -14.34 36.52 40.20 21.80 46.58 1.92 -- -- Peak

Mode	73	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Partial RU 484/66_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	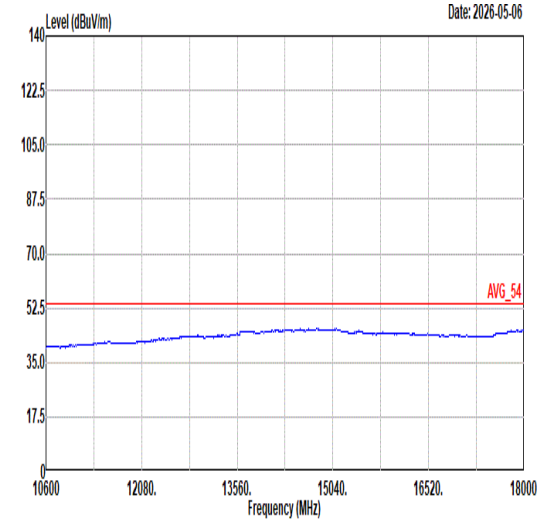 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	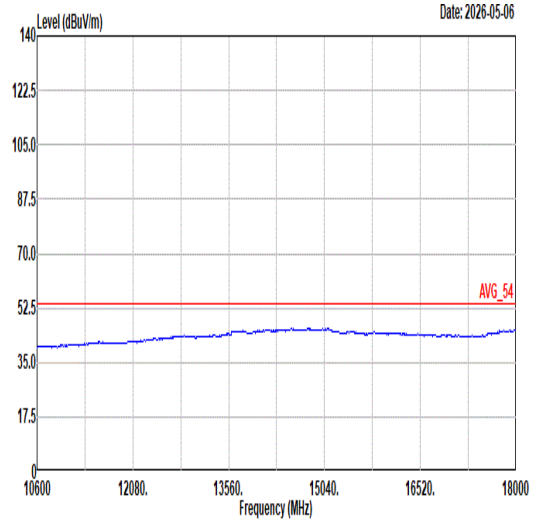 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	74	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	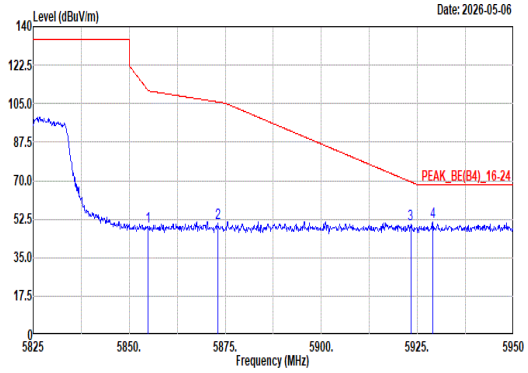 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.88 49.25 111.08 -61.83 36.64 33.61 12.61 34.74 1.13 100 76 Peak 2 5873.13 50.47 105.72 -55.25 37.83 33.65 12.65 34.76 1.10 100 76 Peak 3 5923.25 50.27 69.49 -19.22 37.60 33.65 12.78 34.80 1.04 100 76 Peak 4 5929.00 50.99 68.20 -17.21 38.34 33.64 12.79 34.81 1.03 100 76 Peak	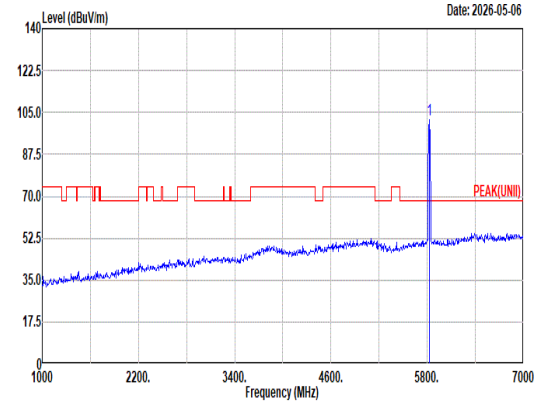 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 102.21 ------ ------ 89.52 33.70 12.53 34.71 1.17 100 76 Peak
Avg	Blank	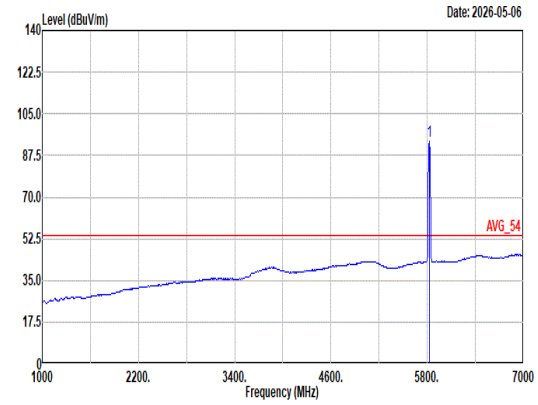 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 93.47 ------ ------ 80.78 33.70 12.53 34.71 1.17 100 76 Average

Mode	74	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	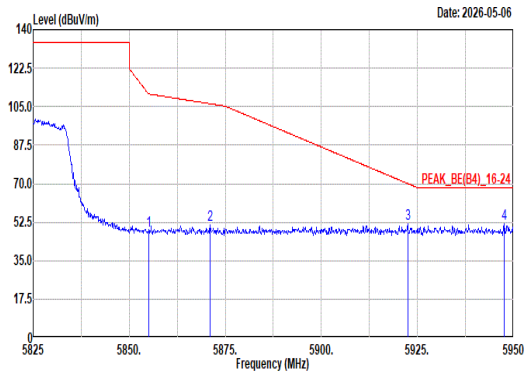 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 48.82 110.80 -61.98 36.21 33.61 12.61 34.74 1.13 100 37 Peak 2 5871.13 51.15 106.28 -55.13 38.50 33.64 12.65 34.75 1.11 100 37 Peak 3 5922.50 51.72 70.04 -18.32 39.05 33.65 12.78 34.80 1.04 100 37 Peak 4 5947.50 51.53 68.20 -16.67 38.90 33.60 12.84 34.82 1.01 100 37 Peak	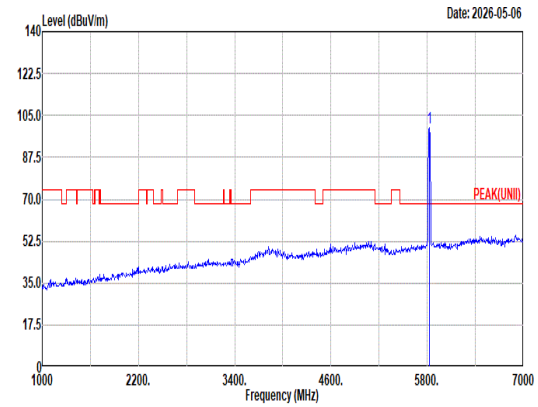 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 99.98 ------ ------ 87.29 33.70 12.53 34.71 1.17 100 37 Peak
Avg	Blank	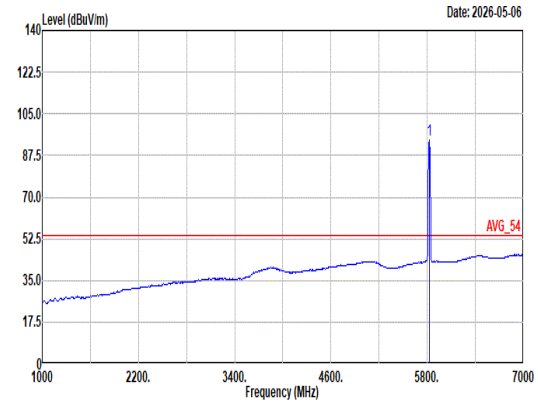 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 94.11 ------ ------ 81.42 33.70 12.53 34.71 1.17 100 37 Average

Mode	74	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	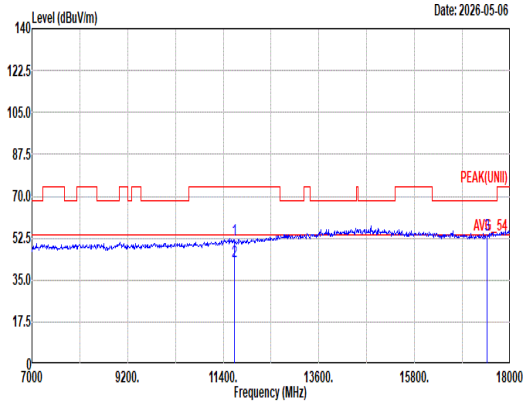 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 11650.00 51.85 74.00 -22.15 33.88 39.00 17.96 40.37 1.38 -- -- Peak 2 11650.00 42.63 54.00 -11.37 24.66 39.00 17.96 40.37 1.38 -- -- Average 3 17475.00 53.82 68.20 -14.38 36.41 40.40 21.82 46.72 1.91 -- -- Peak	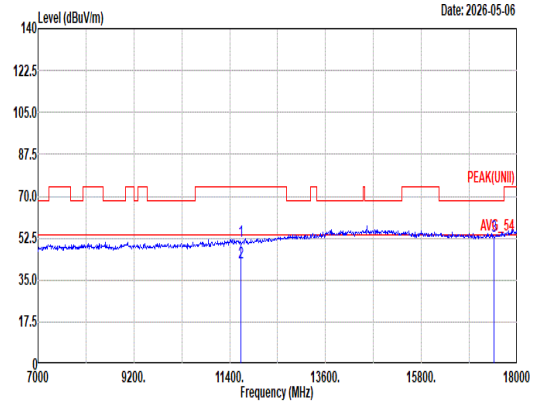 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 11650.00 51.43 74.00 -22.57 33.46 39.00 17.96 40.37 1.38 -- -- Peak 2 11650.00 42.10 54.00 -11.90 24.13 39.00 17.96 40.37 1.38 -- -- Average 3 17475.00 53.57 68.20 -14.63 36.16 40.40 21.82 46.72 1.91 -- -- Peak

Mode	74	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	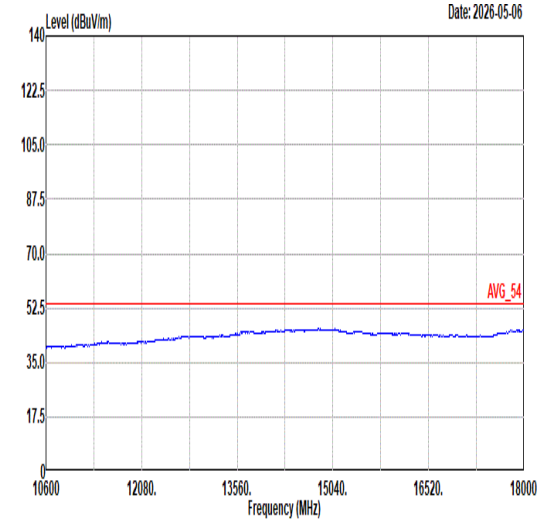 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	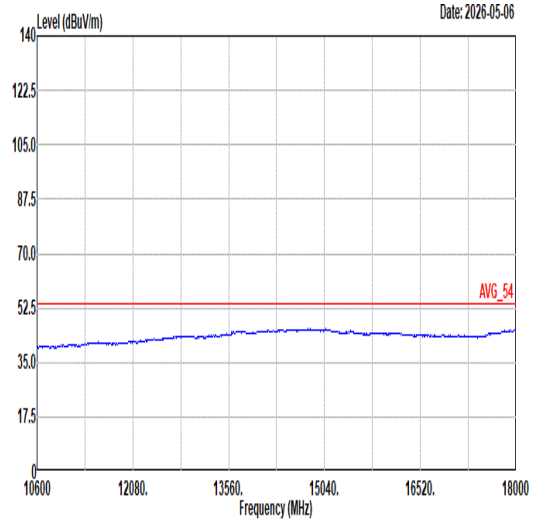 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	75
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	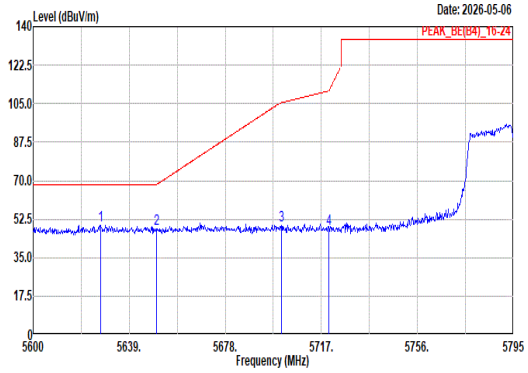 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5627.30 49.59 68.20 -18.61 37.77 33.02 12.43 34.53 0.90 100 47 Peak 2 5650.12 47.83 68.29 -20.46 35.82 33.20 12.43 34.56 0.94 100 47 Peak 3 5700.82 49.52 105.43 -55.91 36.94 33.70 12.45 34.60 1.03 100 47 Peak 4 5720.12 48.27 111.07 -62.80 35.68 33.70 12.45 34.62 1.06 100 47 Peak	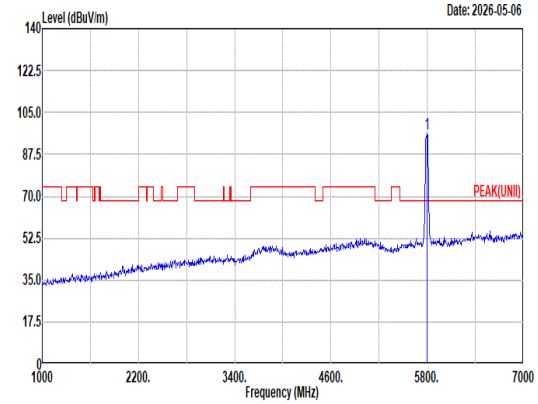 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 96.17 ------ ------ 83.39 33.80 12.47 34.69 1.20 100 47 Peak
Avg	Blank	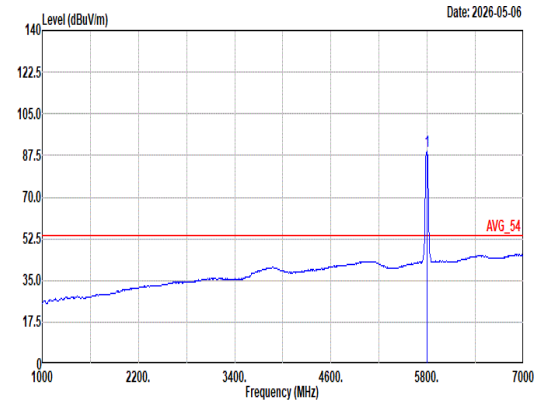 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 89.42 ------ ------ 76.64 33.80 12.47 34.69 1.20 100 47 Average

Mode	75	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	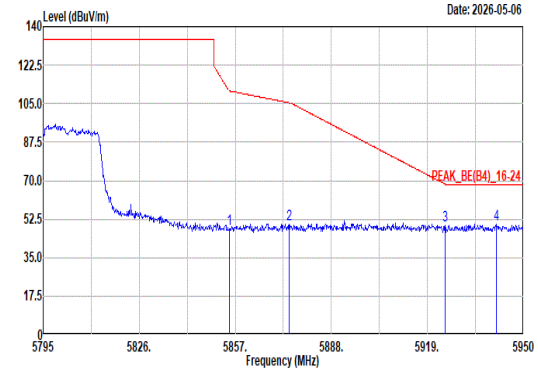 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.99 48.00 110.83 -62.83 35.39 33.61 12.61 34.74 1.13 100 47 Peak 2 5874.36 50.27 105.38 -55.11 37.62 33.65 12.66 34.76 1.10 100 47 Peak 3 5924.74 49.42 68.40 -18.98 36.75 33.65 12.78 34.80 1.04 100 47 Peak 4 5941.32 50.15 68.20 -18.05 37.51 33.62 12.82 34.82 1.02 100 47 Peak	Blank

Mode	75	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	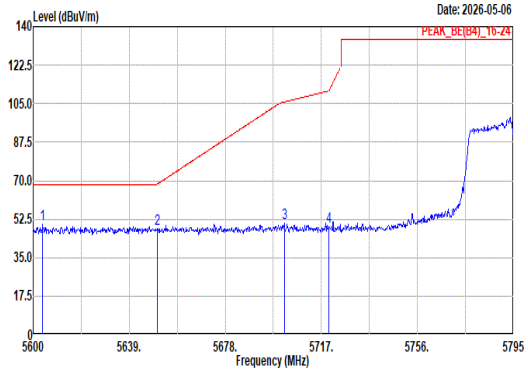 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5603.90 50.08 68.20 -18.12 38.48 32.83 12.42 34.51 0.86 100 29 Peak 2 5650.31 48.32 68.43 -20.11 36.31 33.20 12.43 34.56 0.94 100 29 Peak 3 5701.99 50.98 105.76 -54.78 38.40 33.70 12.45 34.60 1.03 100 29 Peak 4 5720.12 49.07 111.07 -62.00 36.48 33.70 12.45 34.62 1.06 100 29 Peak	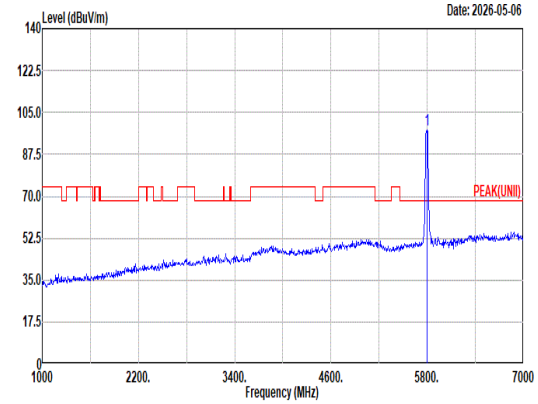 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 97.91 ------ ------ 85.14 33.79 12.47 34.68 1.19 100 29 Peak
Avg	Blank	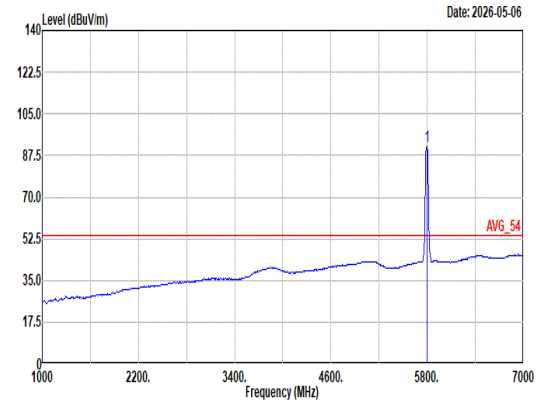 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 91.29 ------ ------ 78.52 33.79 12.47 34.68 1.19 100 29 Average

Mode	75	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	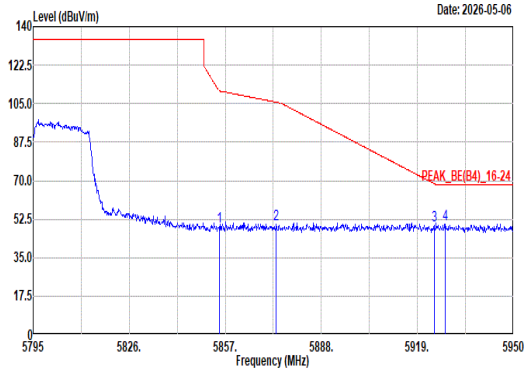 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Blank

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5854.99	49.14	110.83	-61.69	36.53	33.61	12.61	34.74	1.13	100	29	Peak
2	5873.43	49.93	105.64	-55.71	37.29	33.65	12.65	34.76	1.10	100	29	Peak
3	5924.58	49.90	68.51	-18.61	37.23	33.65	12.78	34.80	1.04	100	29	Peak
4	5927.99	50.39	68.20	-17.81	37.74	33.64	12.79	34.81	1.03	100	29	Peak

Mode	75	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	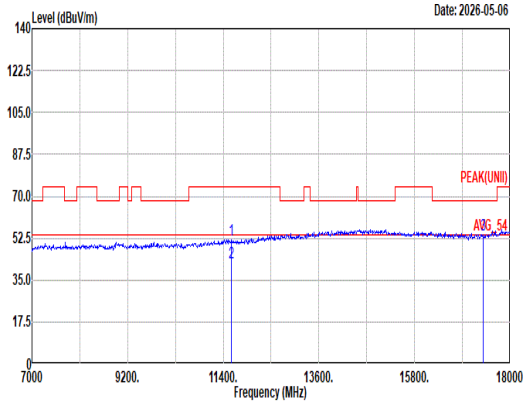 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 51.61 74.00 -22.39 33.62 39.00 17.92 40.31 1.38 -- -- Peak 2 11590.00 42.50 54.00 -11.50 24.51 39.00 17.92 40.31 1.38 -- -- Average 3 17385.00 53.70 68.20 -14.50 36.33 40.27 21.81 46.63 1.92 -- -- Peak	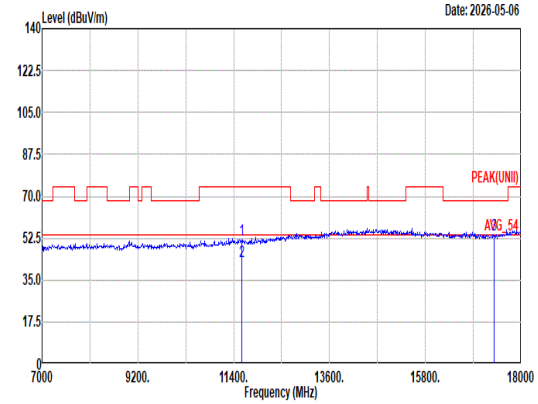 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 51.93 74.00 -22.07 33.94 39.00 17.92 40.31 1.38 -- -- Peak 2 11590.00 42.68 54.00 -11.32 24.69 39.00 17.92 40.31 1.38 -- -- Average 3 17385.00 53.85 68.20 -14.35 36.48 40.27 21.81 46.63 1.92 -- -- Peak

Mode	75	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	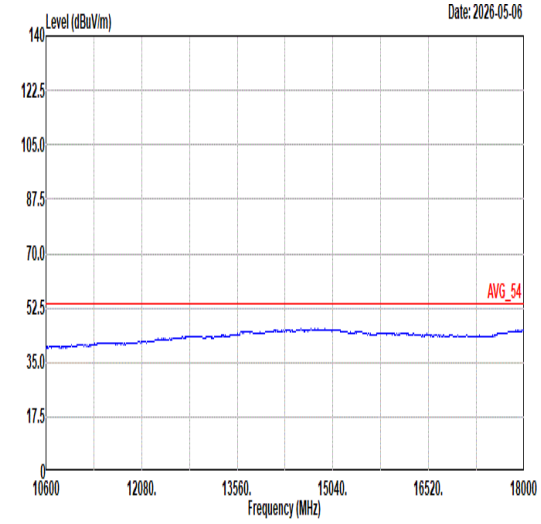 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	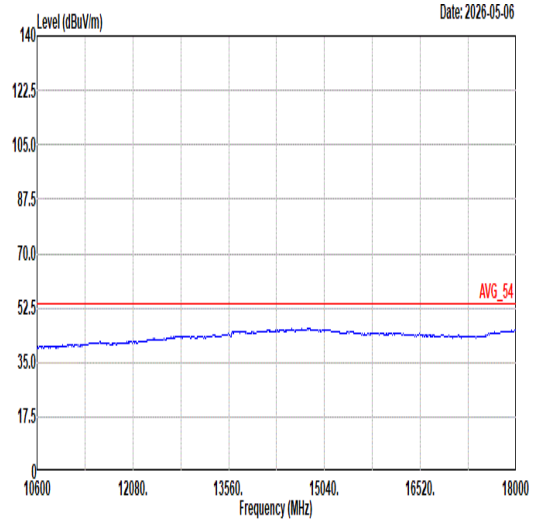 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	76	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	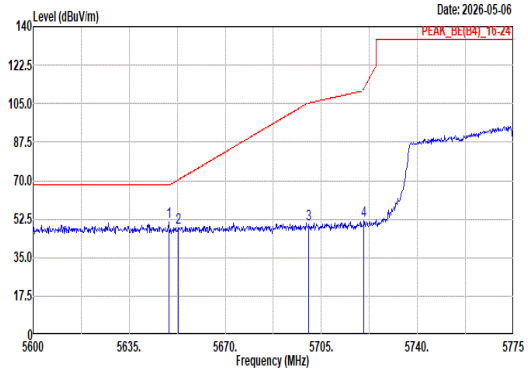 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.35 51.17 68.20 -17.03 39.16 33.19 12.43 34.55 0.94 270 110 Peak 2 5652.85 48.82 70.32 -21.50 36.78 33.23 12.43 34.56 0.94 270 110 Peak 3 5700.45 50.39 105.33 -54.94 37.81 33.70 12.45 34.60 1.03 270 110 Peak 4 5720.58 51.76 112.11 -60.35 39.17 33.70 12.45 34.62 1.06 270 110 Peak	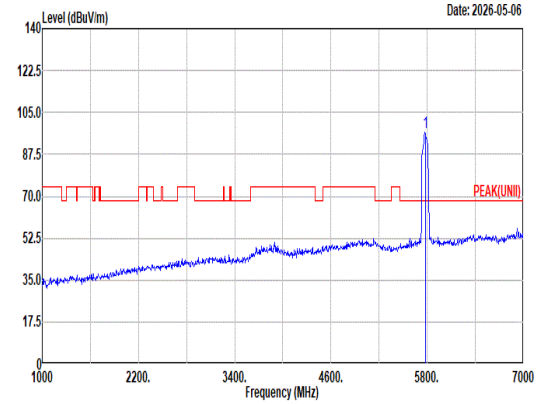 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 96.73 ------ ------ 84.04 33.74 12.46 34.66 1.15 270 110 Peak
Avg	Blank	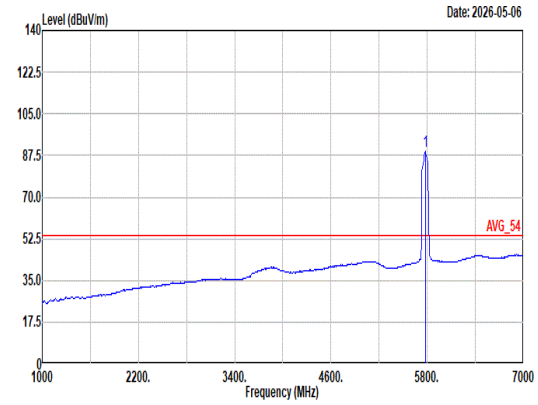 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 89.16 ------ ------ 76.46 33.75 12.46 34.67 1.16 270 110 Average

Mode	76	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	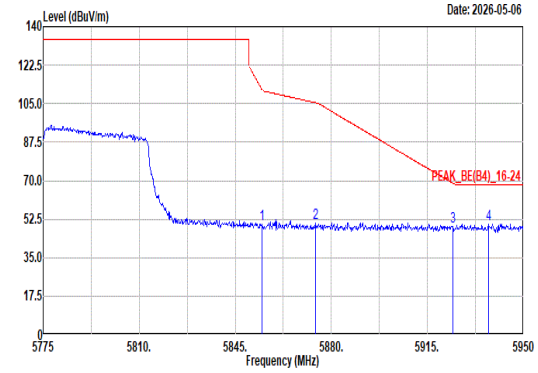 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 50.07 111.26 -61.19 37.46 33.61 12.61 34.74 1.13 270 110 Peak 2 5874.23 50.57 105.42 -54.85 37.92 33.65 12.66 34.76 1.10 270 110 Peak 3 5924.28 48.94 68.73 -19.79 36.27 33.65 12.78 34.80 1.04 270 110 Peak 4 5937.23 50.41 68.20 -17.79 37.76 33.63 12.81 34.81 1.02 270 110 Peak	Blank

Mode	76	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	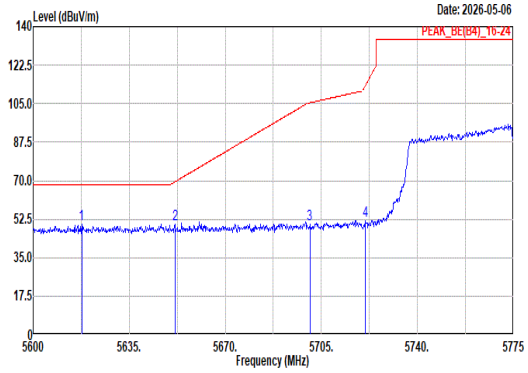 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5617.68 50.04 68.20 -18.16 38.33 32.94 12.42 34.53 0.88 101 339 Peak 2 5651.63 50.06 69.41 -19.35 38.03 33.22 12.43 34.56 0.94 101 339 Peak 3 5700.80 50.30 105.42 -55.12 37.72 33.70 12.45 34.60 1.03 101 339 Peak 4 5720.93 51.52 112.91 -61.39 38.93 33.70 12.45 34.62 1.06 101 339 Peak	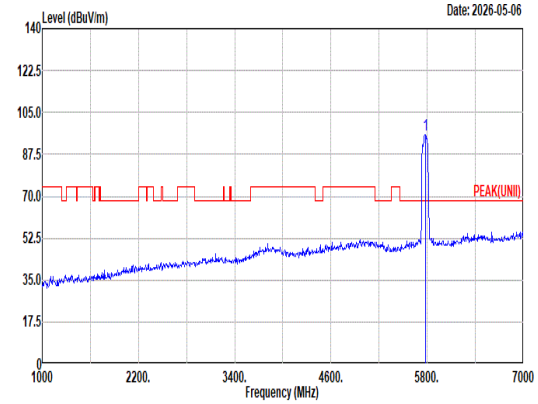 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 95.69 ------ ------ 82.99 33.75 12.46 34.67 1.16 101 339 Peak
Avg	Blank	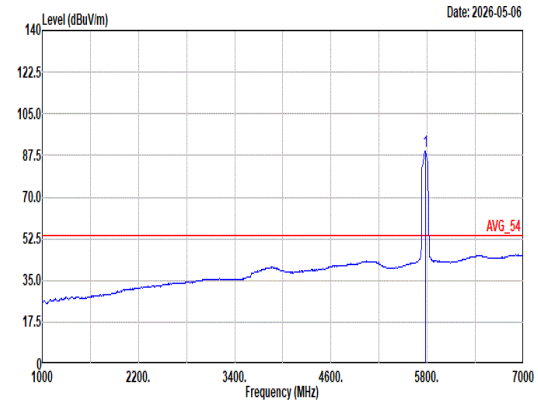 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 89.40 ------ ------ 76.70 33.75 12.46 34.67 1.16 101 339 Average

Mode	76	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	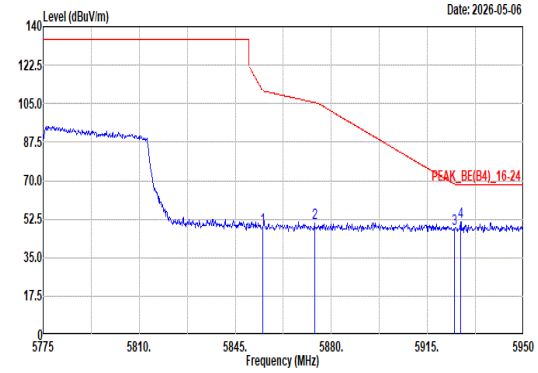 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 48.51 110.86 -62.35 35.90 33.61 12.61 34.74 1.13 101 339 Peak 2 5873.88 50.46 105.51 -55.05 37.82 33.65 12.65 34.76 1.10 101 339 Peak 3 5924.98 48.17 68.22 -20.05 35.50 33.65 12.78 34.80 1.04 101 339 Peak 4 5927.08 51.49 68.20 -16.71 38.82 33.65 12.79 34.80 1.03 101 339 Peak	Blank

Mode	76	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	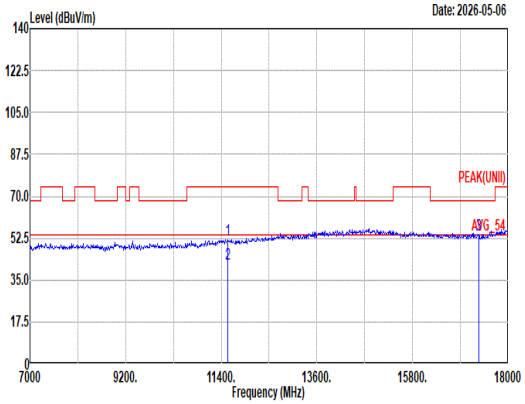 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 51.73 74.00 -22.27 33.74 39.00 17.90 40.28 1.37 -- -- Peak 2 11550.00 41.89 54.00 -12.11 23.90 39.00 17.90 40.28 1.37 -- -- Average 3 17325.00 53.83 68.20 -14.37 36.49 40.20 21.80 46.58 1.92 -- -- Peak	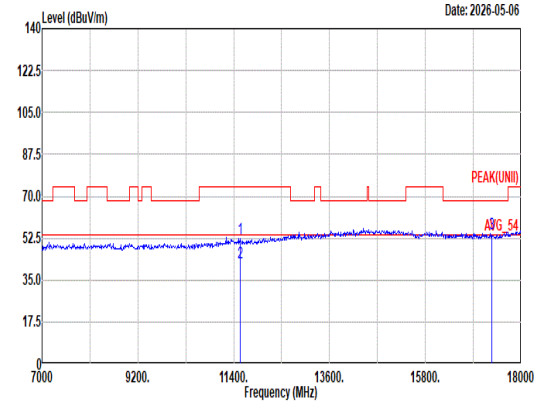 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 52.21 74.00 -21.79 34.22 39.00 17.90 40.28 1.37 -- -- Peak 2 11550.00 42.27 54.00 -11.73 24.28 39.00 17.90 40.28 1.37 -- -- Average 3 17325.00 54.33 68.20 -13.87 36.99 40.20 21.80 46.58 1.92 -- -- Peak

Mode	76	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	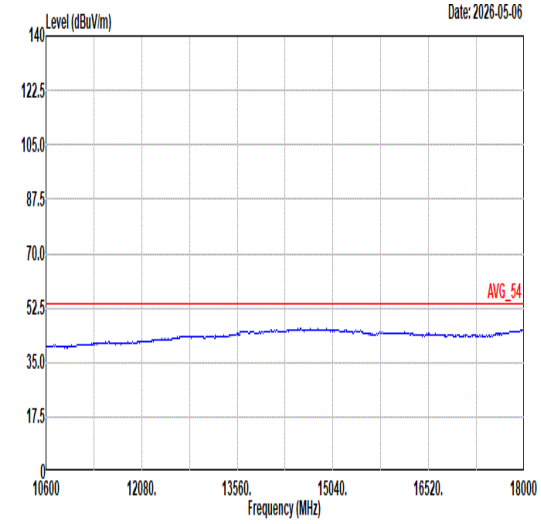 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	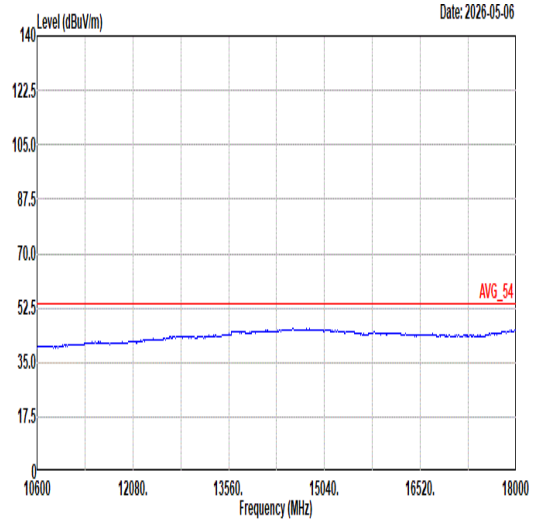 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	77	
	LF	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
QP/ Peak	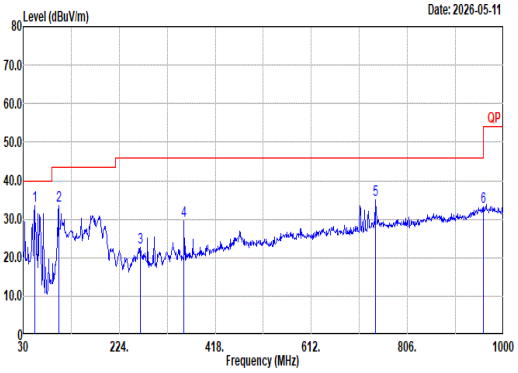	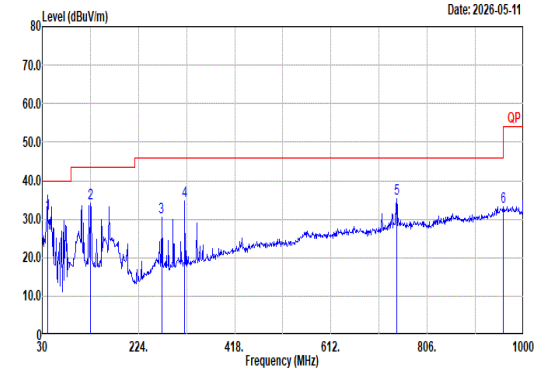

Site : 03CH22-HY
Condition: QP 3m Bilog_63304_251126 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	53.28	33.43	40.00	-6.57	51.79	13.03	1.16	32.59	0.04	--	--	Peak
2	101.78	33.61	43.50	-9.89	48.24	16.17	1.66	32.52	0.06	--	--	Peak
3	266.68	22.62	46.00	-23.38	32.85	19.53	2.67	32.51	0.08	--	--	Peak
4	354.95	29.55	46.00	-16.45	38.40	20.52	3.09	32.54	0.08	--	--	Peak
5	741.01	35.03	46.00	-10.97	34.90	27.93	4.55	32.52	0.17	--	--	Peak
6	959.26	33.24	46.00	-12.76	28.11	30.93	5.08	31.12	0.24	--	--	Peak

Site : 03CH22-HY
Condition: QP 3m Bilog_63304_251126 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	40.67	31.39	40.00	-8.61	44.22	18.71	0.99	32.56	0.03	100	93	QP
2	127.00	34.11	43.50	-9.39	47.49	17.27	1.81	32.52	0.06	--	--	Peak
3	270.56	30.57	46.00	-15.43	41.46	18.84	2.70	32.51	0.08	--	--	Peak
4	317.12	34.84	46.00	-11.16	45.01	19.35	2.93	32.53	0.08	--	--	Peak
5	744.89	35.47	46.00	-10.53	35.27	27.97	4.56	32.51	0.18	--	--	Peak
6	959.26	33.32	46.00	-12.68	28.19	30.93	5.08	31.12	0.24	--	--	Peak

Mode	78	
	SHF	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak	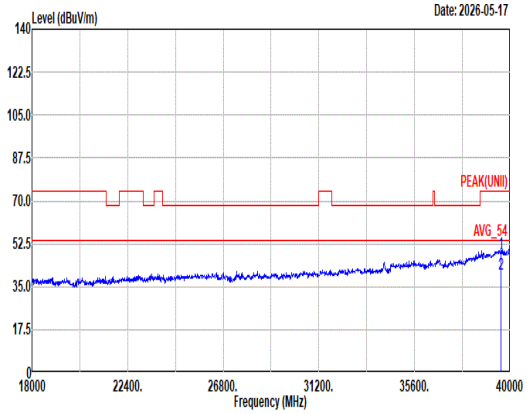 Site : 03CH22-HY Condition: PEAK(UNII) 1m BBHA9170_1225_250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 39589.61 48.64 74.00 -25.36 39.20 46.24 34.83 62.09 -9.54 -- -- PEAK 2 39589.61 40.34 54.00 -13.66 30.90 46.24 34.83 62.09 -9.54 -- -- Average	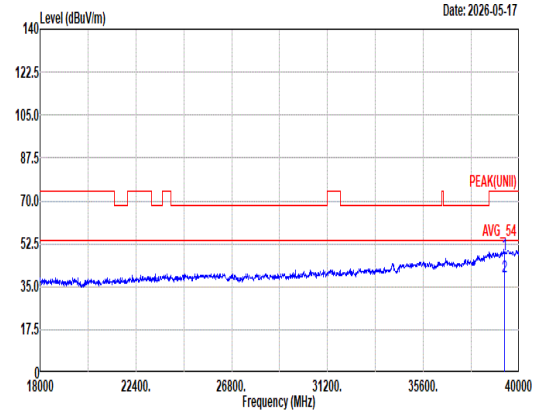 Site : 03CH22-HY Condition: PEAK(UNII) 1m BBHA9170_1225_250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 39309.25 48.08 74.00 -25.92 39.56 45.51 34.55 62.00 -9.54 -- -- PEAK 2 39309.25 39.30 54.00 -14.70 30.78 45.51 34.55 62.00 -9.54 -- -- Average

Mode	93
	Band Edge
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 26/0_5745MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	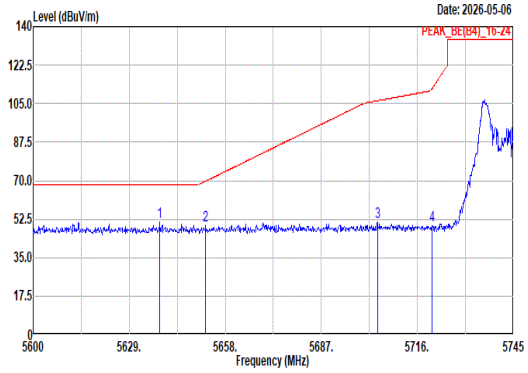 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5638.28 51.30 68.20 -16.90 39.38 33.11 12.43 34.54 0.92 100 84 Peak 2 5652.06 49.66 69.73 -20.07 37.63 33.22 12.43 34.56 0.94 100 84 Peak 3 5703.97 51.18 106.31 -55.13 38.60 33.70 12.45 34.60 1.03 100 84 Peak 4 5720.35 49.90 111.60 -61.70 37.31 33.70 12.45 34.62 1.06 100 84 Peak	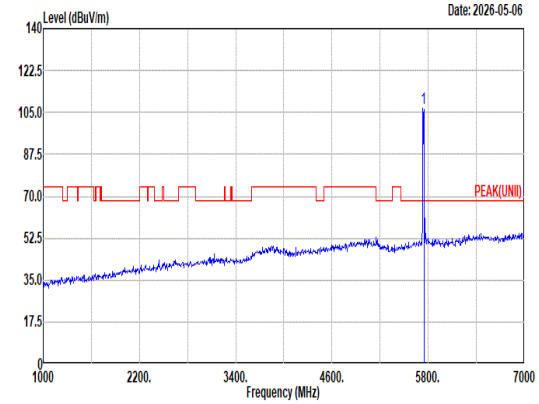 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 106.52 ------ ------ 93.92 33.70 12.45 34.63 1.08 100 84 Peak
Avg	Blank	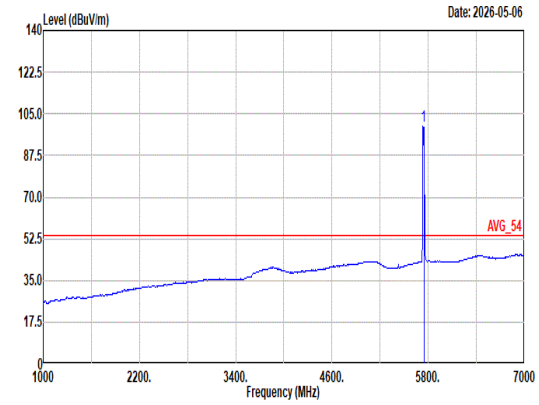 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 99.97 ------ ------ 87.37 33.70 12.45 34.63 1.08 100 84 Average

Mode	93	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 26/0_5745MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	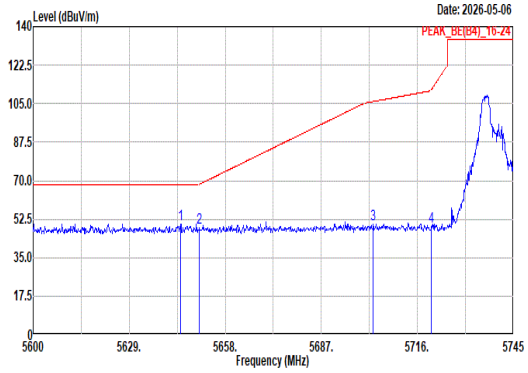 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5644.52 50.33 68.20 -17.87 38.36 33.16 12.43 34.55 0.93 100 33 Peak 2 5650.17 48.70 68.33 -19.63 36.69 33.20 12.43 34.56 0.94 100 33 Peak 3 5702.66 50.16 105.95 -55.79 37.58 33.70 12.45 34.60 1.03 100 33 Peak 4 5720.21 49.39 111.27 -61.88 36.80 33.70 12.45 34.62 1.06 100 33 Peak	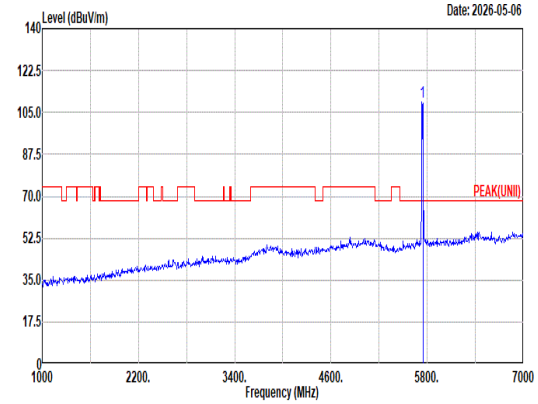 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 109.18 ------ ------ 96.58 33.70 12.45 34.63 1.08 100 33 Peak
Avg	Blank	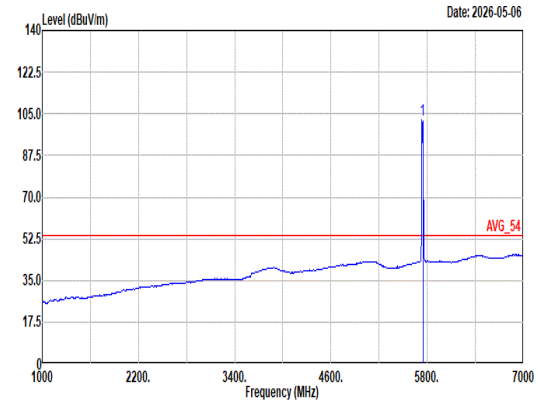 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 102.37 ------ ------ 89.77 33.70 12.45 34.63 1.08 100 33 Average

Mode	93	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 26/0_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	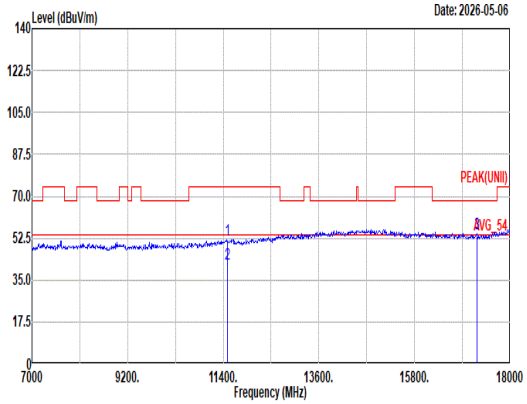 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 51.71 74.00 -22.29 33.80 38.90 17.86 40.22 1.37 -- -- Peak 2 11490.00 41.77 54.00 -12.23 23.86 38.90 17.86 40.22 1.37 -- -- Average 3 17235.00 54.16 68.20 -14.04 36.73 40.20 21.79 46.49 1.93 -- -- Peak	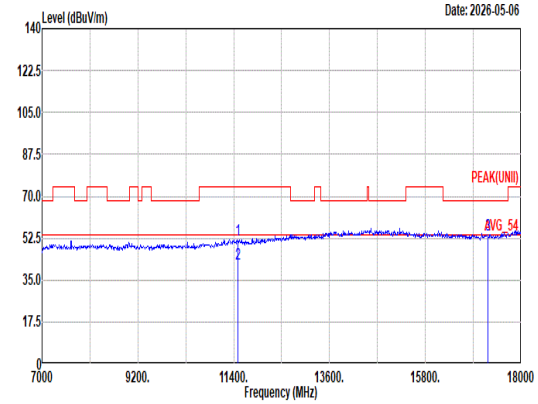 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 51.83 74.00 -22.17 33.92 38.90 17.86 40.22 1.37 -- -- Peak 2 11490.00 41.88 54.00 -12.12 23.97 38.90 17.86 40.22 1.37 -- -- Average 3 17235.00 54.10 68.20 -14.10 36.67 40.20 21.79 46.49 1.93 -- -- Peak

Mode	93	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 26/0_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	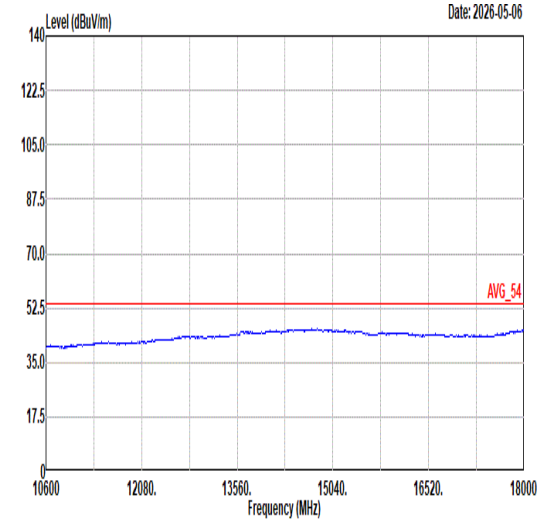 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	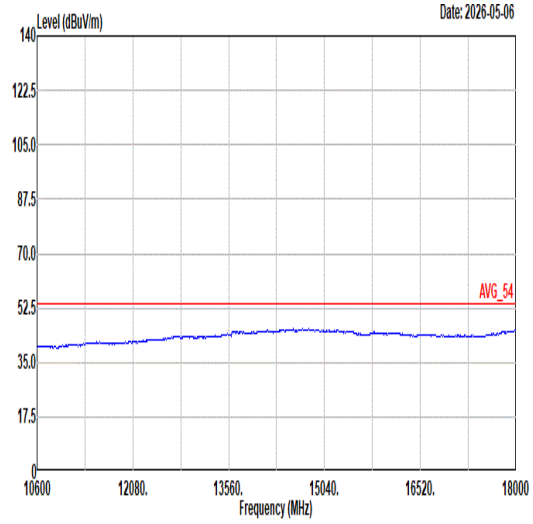 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	94
	Band Edge
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 52/37_5745MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	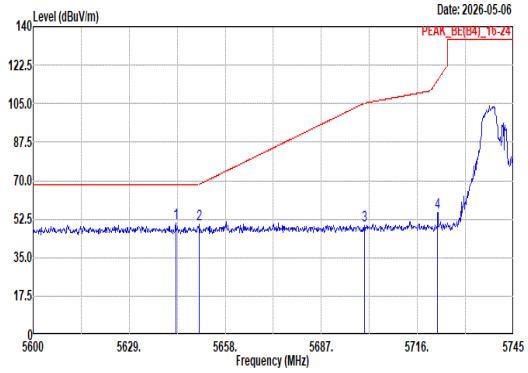 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5643.07 50.65 68.20 -17.55 38.70 33.14 12.43 34.55 0.93 287 107 Peak 2 5650.03 49.97 68.22 -18.25 37.96 33.20 12.43 34.56 0.94 287 107 Peak 3 5700.05 49.63 105.21 -55.58 37.05 33.70 12.45 34.60 1.03 287 107 Peak 4 5722.09 55.42 115.57 -60.15 42.83 33.70 12.45 34.62 1.06 287 107 Peak	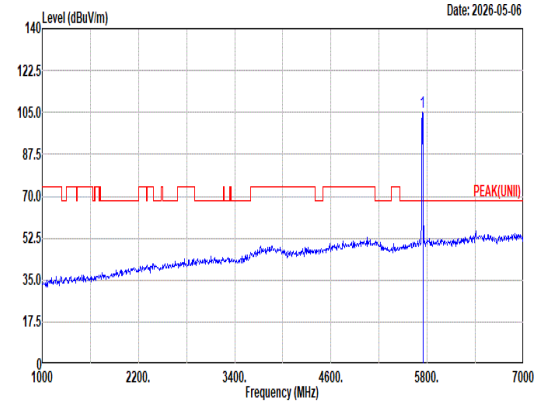 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 104.90 ------ ------ 92.29 33.70 12.45 34.64 1.10 287 107 Peak
Avg	Blank	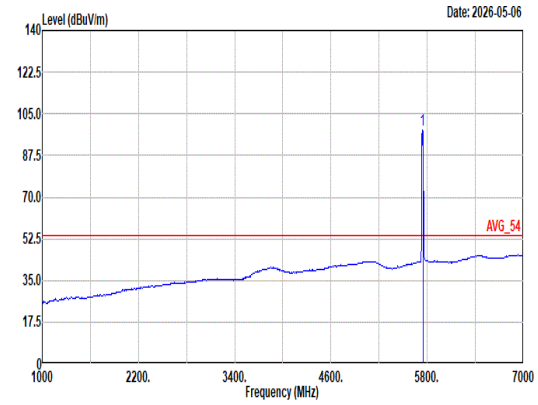 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 98.05 ------ ------ 85.44 33.70 12.45 34.64 1.10 287 107 Average

Mode	94	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 52/37_5745MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	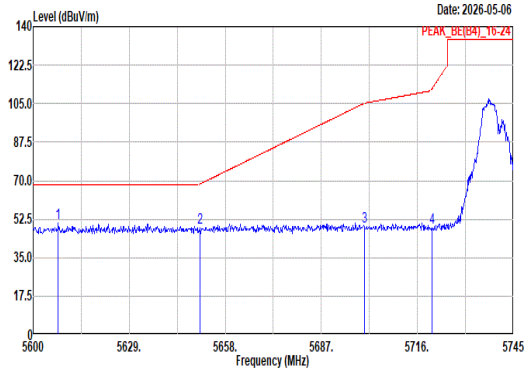 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5607.54 50.55 68.20 -17.65 38.93 32.86 12.42 34.52 0.86 100 338 Peak 2 5650.32 48.45 68.43 -19.98 36.44 33.20 12.43 34.56 0.94 100 338 Peak 3 5700.05 49.30 105.21 -55.91 36.72 33.70 12.45 34.60 1.03 100 338 Peak 4 5720.35 48.64 111.60 -62.96 36.05 33.70 12.45 34.62 1.06 100 338 Peak	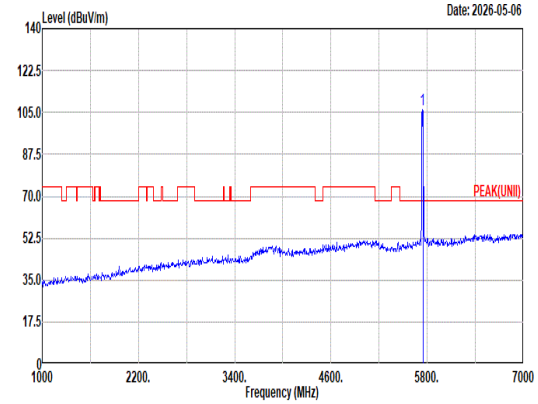 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 106.02 ------ ------ 93.41 33.70 12.45 34.64 1.10 100 338 Peak
Avg	Blank	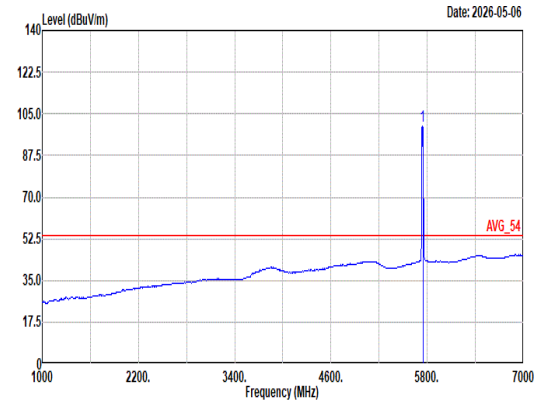 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 99.62 ------ ------ 87.01 33.70 12.45 34.64 1.10 100 338 Average	

Mode	94	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 52/37_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	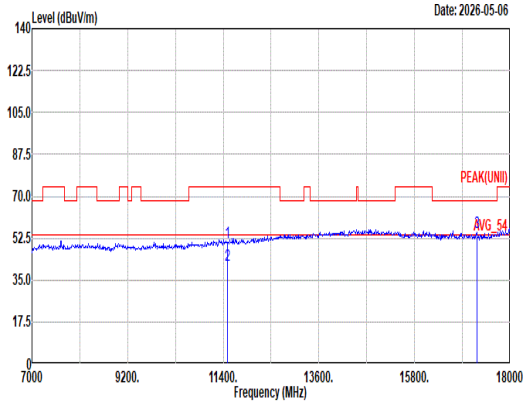 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 50.83 74.00 -23.17 32.92 38.90 17.86 40.22 1.37 -- -- Peak 2 11490.00 41.43 54.00 -12.57 23.52 38.90 17.86 40.22 1.37 -- -- Average 3 17235.00 54.79 68.20 -13.41 37.36 40.20 21.79 46.49 1.93 -- -- Peak	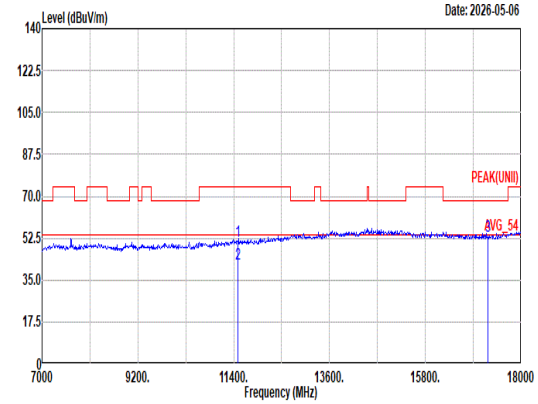 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 51.35 74.00 -22.65 33.44 38.90 17.86 40.22 1.37 -- -- Peak 2 11490.00 41.54 54.00 -12.46 23.63 38.90 17.86 40.22 1.37 -- -- Average 3 17235.00 53.15 68.20 -15.05 35.72 40.20 21.79 46.49 1.93 -- -- Peak

Mode	94	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 52/37_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	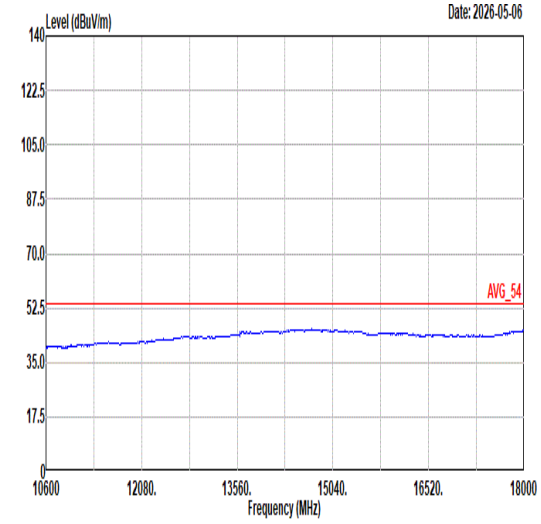 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	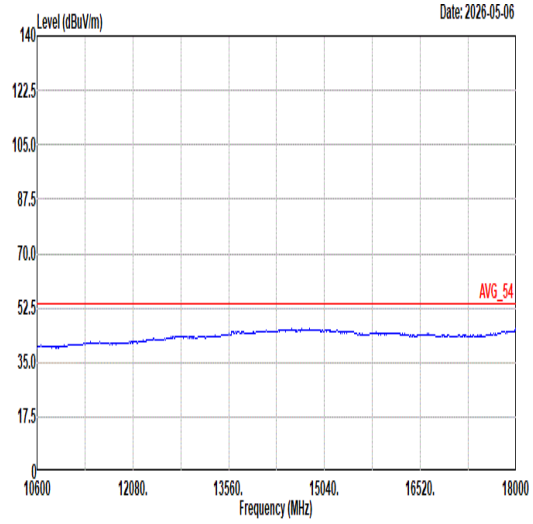 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	95
	Band Edge
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 106/53_5745MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	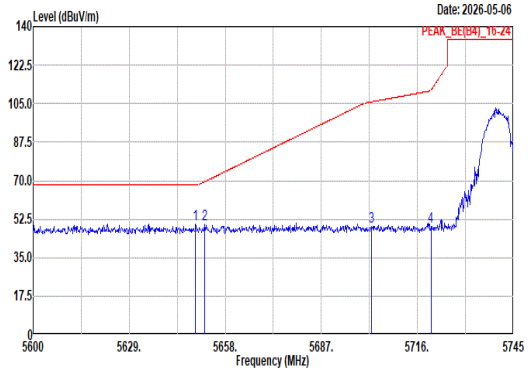 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.01 50.15 68.20 -18.05 38.14 33.19 12.43 34.55 0.94 200 82 Peak 2 5651.77 49.95 69.51 -19.56 37.92 33.22 12.43 34.56 0.94 200 82 Peak 3 5702.23 49.37 105.82 -56.45 36.79 33.70 12.45 34.60 1.03 200 82 Peak 4 5720.06 49.39 110.94 -61.55 36.80 33.70 12.45 34.62 1.06 200 82 Peak	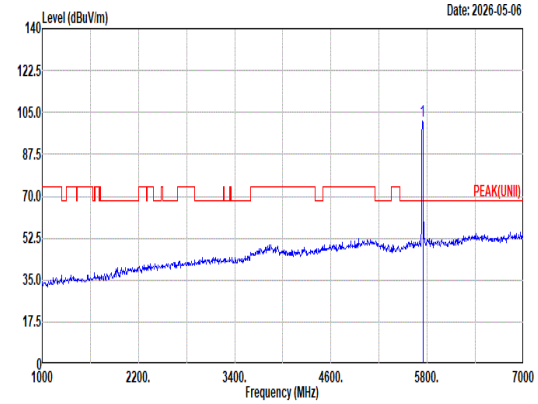 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.29 ------ ------ 88.68 33.70 12.45 34.64 1.10 200 82 Peak
Avg	Blank	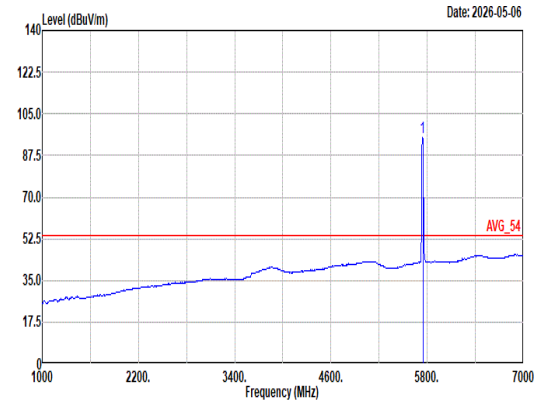 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 95.32 ------ ------ 82.71 33.70 12.45 34.64 1.10 200 82 Average

Mode	95	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 106/53_5745MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	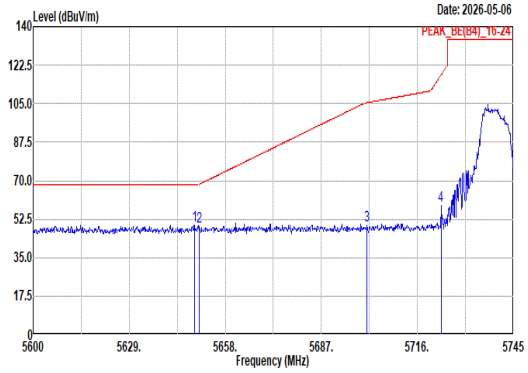 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5648.72 49.88 68.20 -18.32 37.87 33.19 12.43 34.55 0.94 100 338 Peak 2 5650.17 48.96 68.33 -19.37 36.95 33.20 12.43 34.56 0.94 100 338 Peak 3 5700.78 49.42 105.42 -56.00 36.84 33.70 12.45 34.60 1.03 100 338 Peak 4 5723.11 58.63 117.88 -59.25 46.03 33.70 12.45 34.62 1.07 100 338 Peak	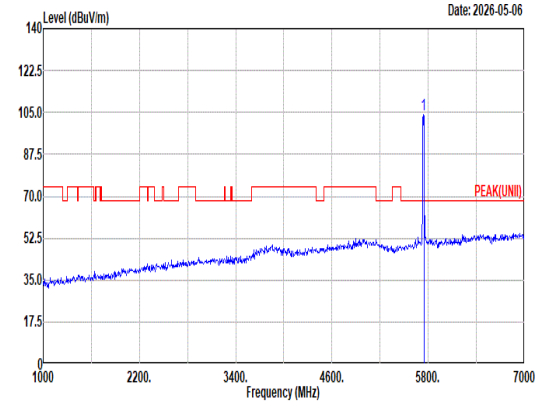 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 104.26 ------ ------ 91.65 33.70 12.45 34.64 1.10 100 338 Peak
Avg	Blank	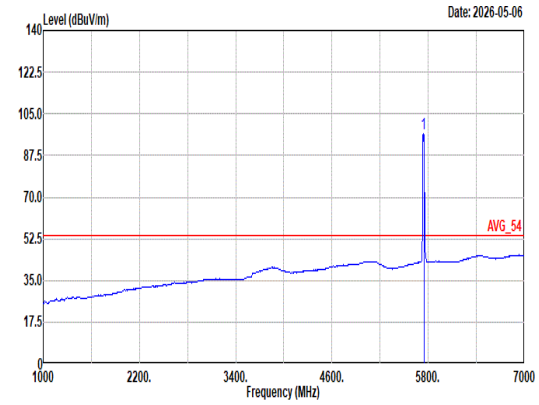 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 96.78 ------ ------ 84.17 33.70 12.45 34.64 1.10 100 338 Average

Mode	95	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 106/53_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	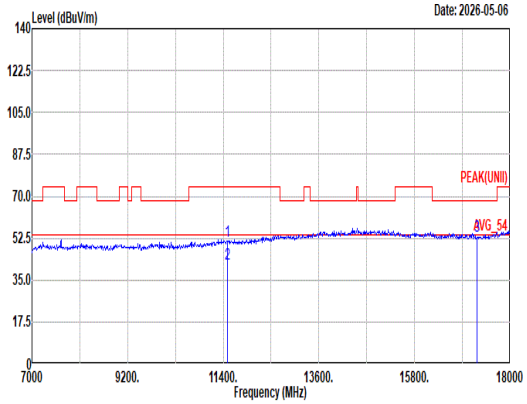 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 51.36 74.00 -22.64 33.45 38.90 17.86 40.22 1.37 -- -- Peak 2 11490.00 41.60 54.00 -12.40 23.69 38.90 17.86 40.22 1.37 -- -- Average 3 17235.00 53.19 68.20 -15.01 35.76 40.20 21.79 46.49 1.93 -- -- Peak	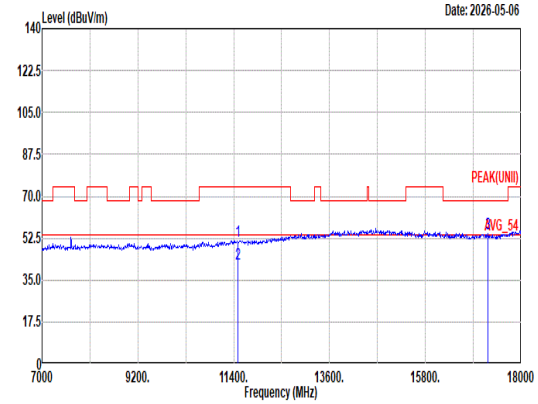 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 51.44 74.00 -22.56 33.53 38.90 17.86 40.22 1.37 -- -- Peak 2 11490.00 41.65 54.00 -12.35 23.74 38.90 17.86 40.22 1.37 -- -- Average 3 17235.00 54.48 68.20 -13.72 37.05 40.20 21.79 46.49 1.93 -- -- Peak

Mode	95	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU 106/53_5745MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	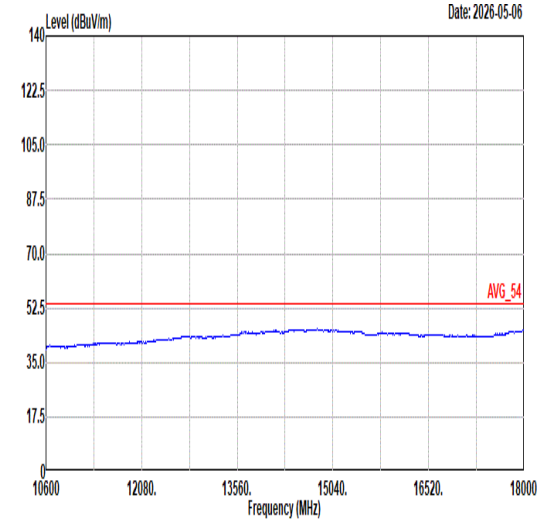 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	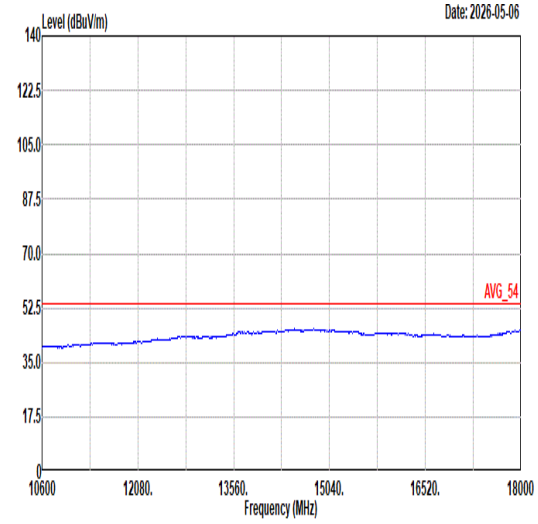 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL

Mode	96
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Partial RU 106/53_5785MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	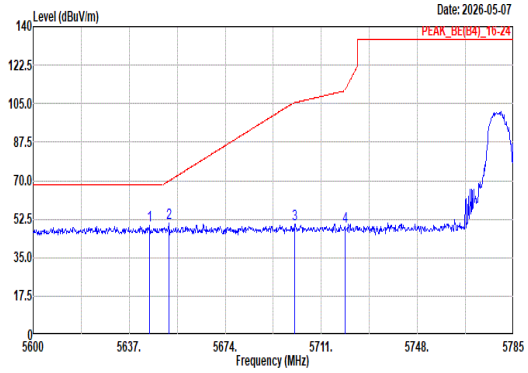 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5644.77 49.44 68.20 -18.76 37.47 33.16 12.43 34.55 0.93 100 39 Peak 2 5652.17 50.60 69.81 -19.21 38.57 33.22 12.43 34.56 0.94 100 39 Peak 3 5700.83 50.09 105.43 -55.34 37.51 33.70 12.45 34.60 1.03 100 39 Peak 4 5720.07 49.08 110.95 -61.87 36.49 33.70 12.45 34.62 1.06 100 39 Peak	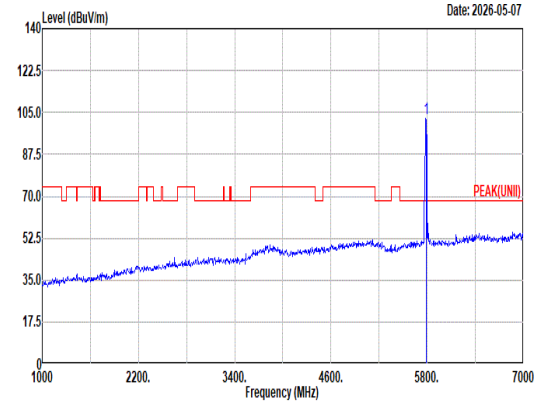 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 102.51 ------ ------ 89.81 33.75 12.46 34.67 1.16 100 39 Peak
Avg	Blank	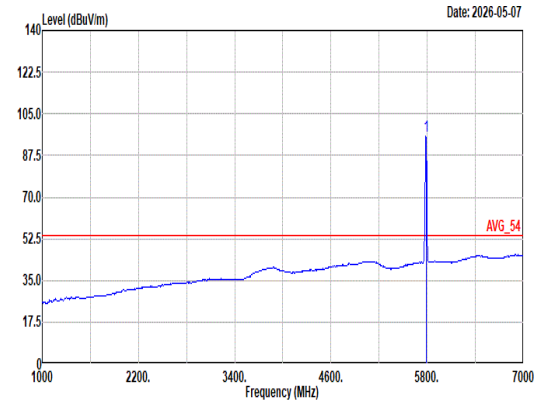 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 95.66 ------ ------ 82.96 33.75 12.46 34.67 1.16 100 39 Average

Mode	96	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Partial RU 106/53_5785MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	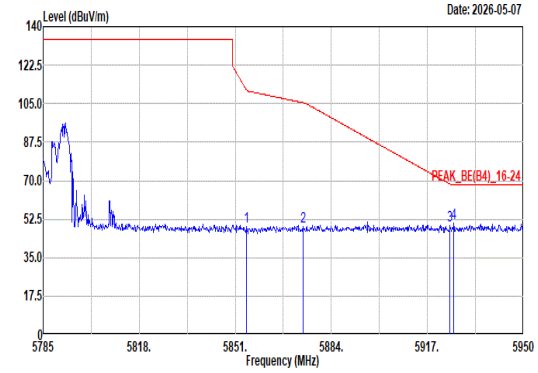 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.96 49.03 110.89 -61.86 36.42 33.61 12.61 34.74 1.13 100 39 Peak 2 5874.27 49.16 105.41 -56.25 36.51 33.65 12.66 34.76 1.10 100 39 Peak 3 5924.76 49.58 68.38 -18.80 36.91 33.65 12.78 34.80 1.04 100 39 Peak 4 5926.08 50.60 68.20 -17.60 37.92 33.65 12.79 34.80 1.04 100 39 Peak	Blank

Mode	96
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Partial RU 106/53_5785MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	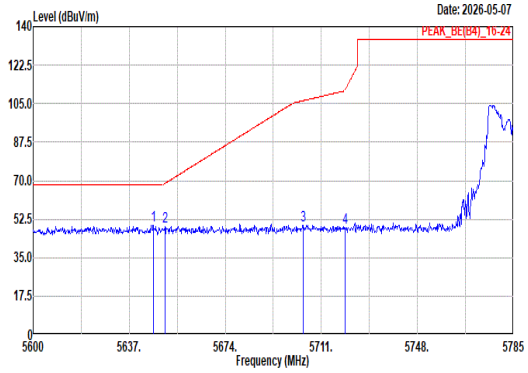 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.25 49.91 68.20 -18.29 37.93 33.17 12.43 34.55 0.93 100 34 Peak 2 5650.69 49.02 68.71 -19.69 37.00 33.21 12.43 34.56 0.94 100 34 Peak 3 5703.97 49.90 106.31 -56.41 37.32 33.70 12.45 34.60 1.03 100 34 Peak 4 5720.25 48.58 111.37 -62.79 35.99 33.70 12.45 34.62 1.06 100 34 Peak	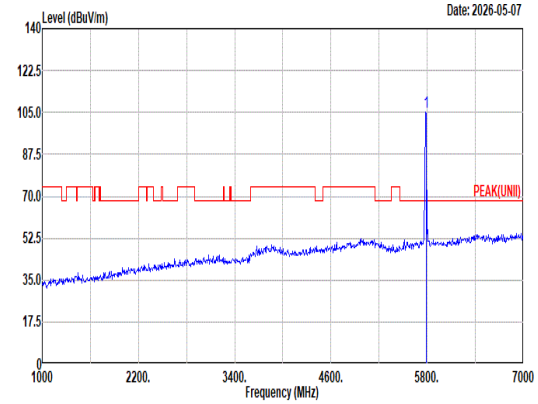 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 105.34 ------ ------ 92.64 33.75 12.46 34.67 1.16 100 34 Peak
Avg	Blank	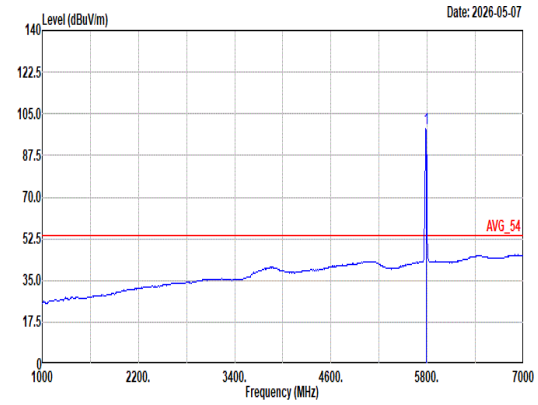 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5785.00 98.70 ------ ------ 86.00 33.75 12.46 34.67 1.16 100 34 Average

Mode	96	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Partial RU 106/53_5785MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	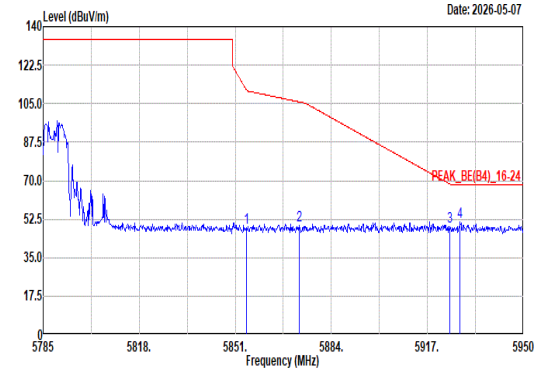 Site : 03CH22-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.96 48.56 110.89 -62.33 35.95 33.61 12.61 34.74 1.13 100 34 Peak 2 5872.95 49.77 105.77 -56.00 37.12 33.65 12.65 34.76 1.11 100 34 Peak 3 5924.76 49.38 68.38 -19.00 36.71 33.65 12.78 34.80 1.04 100 34 Peak 4 5928.22 51.06 68.20 -17.14 38.41 33.64 12.79 34.81 1.03 100 34 Peak	Blank

Mode	96	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Partial RU 106/53_5785MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	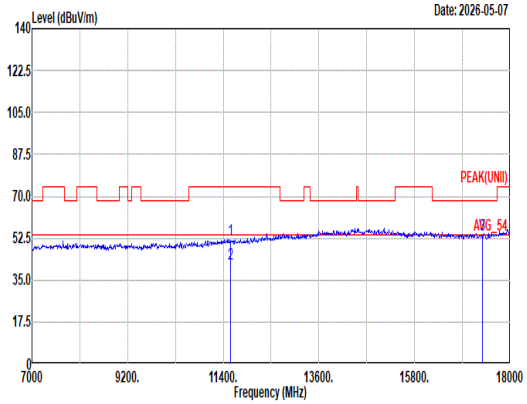 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 51.85 74.00 -22.15 33.86 39.00 17.91 40.30 1.38 -- -- Peak 2 11570.00 41.96 54.00 -12.04 23.97 39.00 17.91 40.30 1.38 -- -- Average 3 17355.00 53.91 68.20 -14.29 36.57 40.21 21.81 46.60 1.92 -- -- Peak	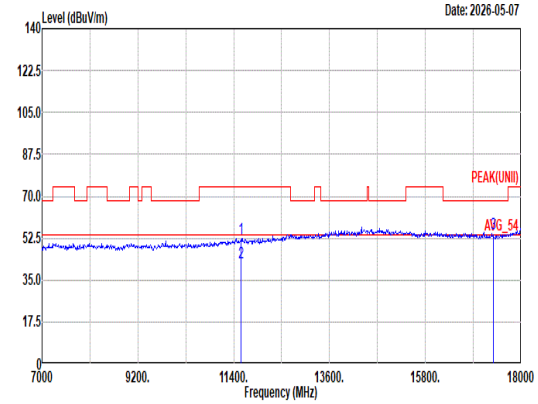 Site : 03CH22-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C04A18EN_250520 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 52.08 74.00 -21.92 34.09 39.00 17.91 40.30 1.38 -- -- Peak 2 11570.00 42.18 54.00 -11.82 24.19 39.00 17.91 40.30 1.38 -- -- Average 3 17355.00 54.50 68.20 -13.70 37.16 40.21 21.81 46.60 1.92 -- -- Peak