


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

115 dBuV/m

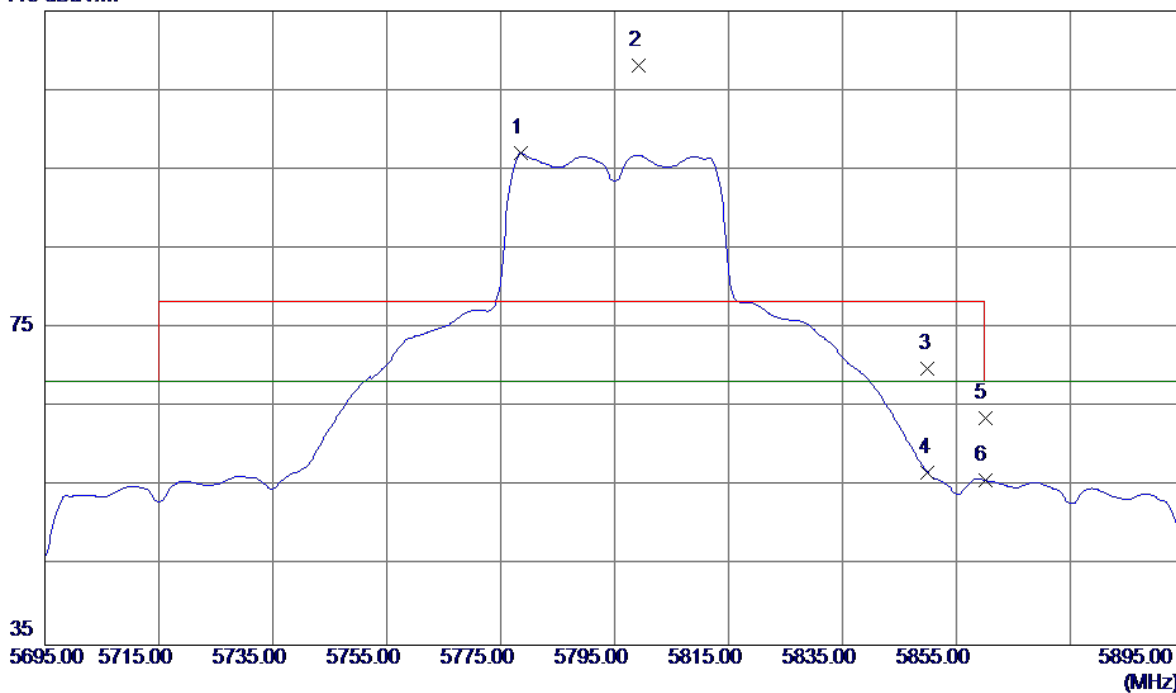


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5778.6000	55.73	41.34	97.07	68.30	28.77	AVG	No Limit
2	5799.2000	66.67	41.37	108.04	78.30	29.74	Peak	No Limit
3	5850.0000	28.45	41.44	69.89	78.30	-8.41	Peak	
4	5850.0000	15.27	41.44	56.71	68.30	-11.59	AVG	
5	5860.0000	22.21	41.45	63.66	78.30	-14.64	Peak	
6	5860.0000	14.38	41.45	55.83	68.30	-12.47	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

80 dBuV/m

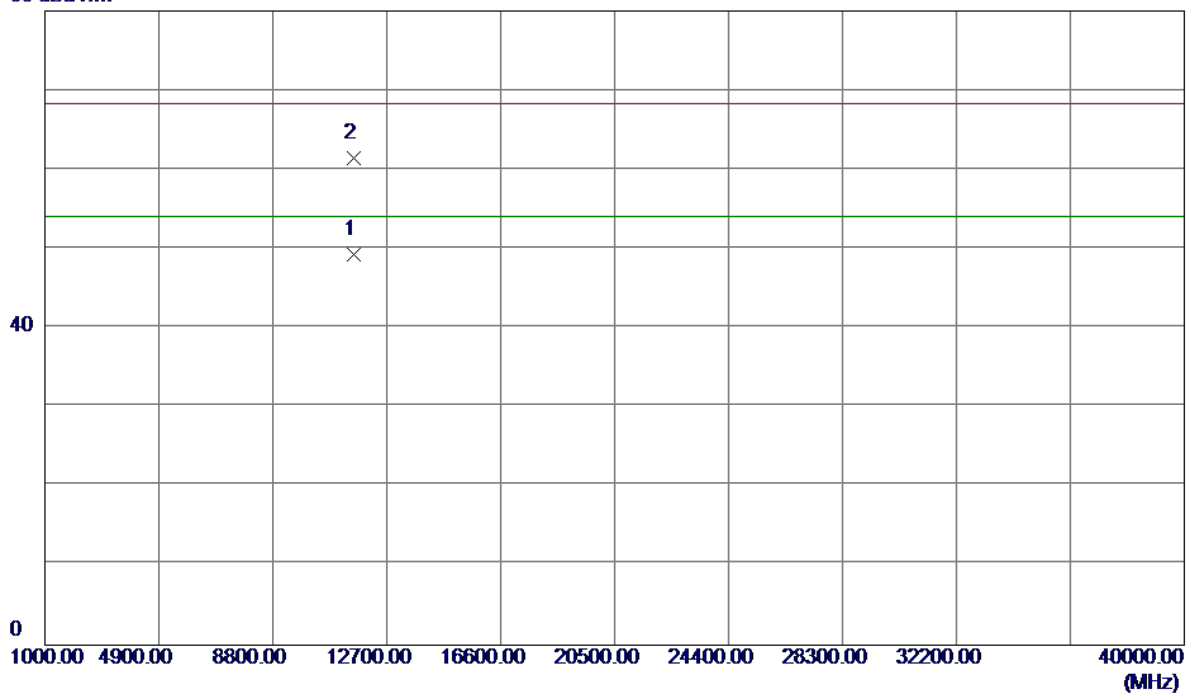


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11590.0300	32.23	17.08	49.31	54.00	-4.69	AVG	
2	11590.1600	44.42	17.08	61.50	68.30	-6.80	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical

115 dBuV/m

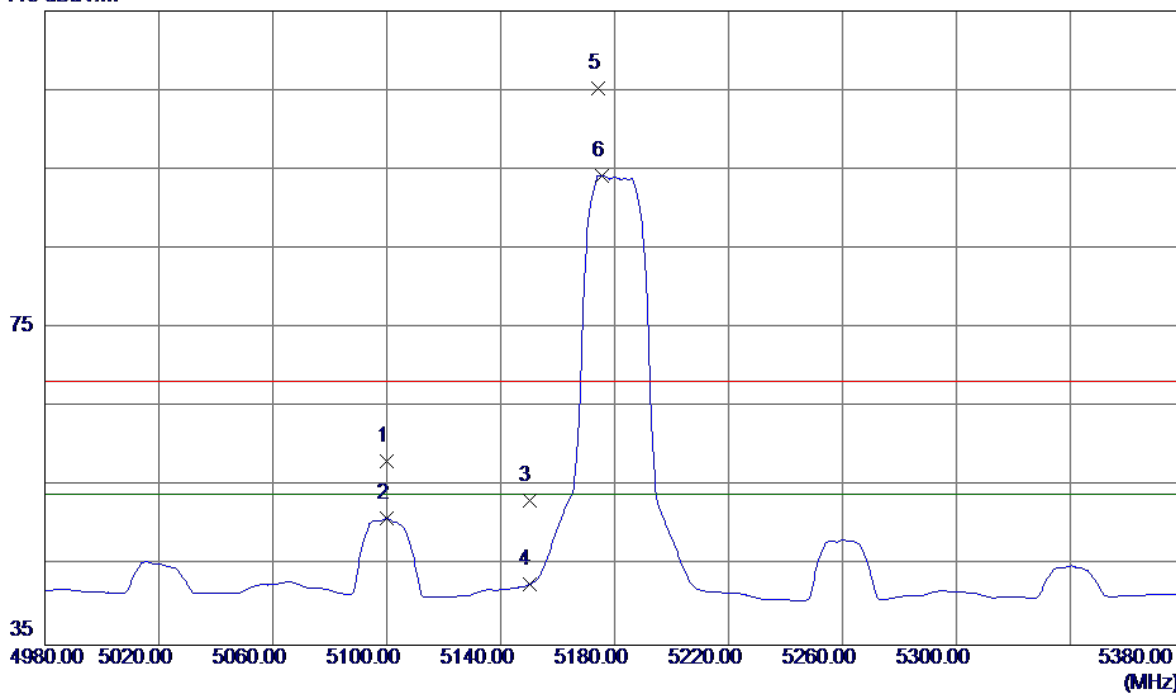


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5100.0000	18.15	40.11	58.26	68.30	-10.04	Peak	
2	5100.0000	10.86	40.11	50.97	54.00	-3.03	AVG	
3	5150.0000	12.98	40.22	53.20	68.30	-15.10	Peak	
4	5150.0000	2.40	40.22	42.62	54.00	-11.38	AVG	
5	5174.4000	64.94	40.27	105.21	68.30	36.91	Peak	No Limit
6	5175.6000	53.97	40.27	94.24	54.00	40.24	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical


80 dBuV/m

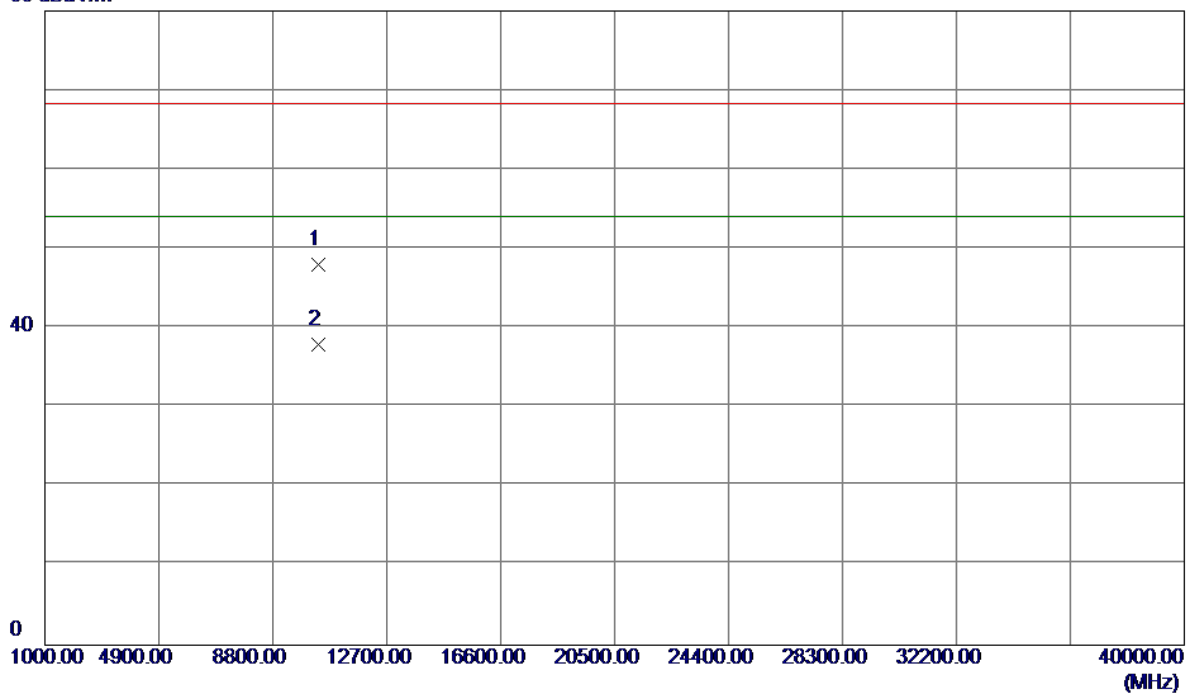

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10360.1210	34.07	13.86	47.93	68.30	-20.37	Peak	
2	10360.3280	24.01	13.86	37.87	54.00	-16.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Horizontal

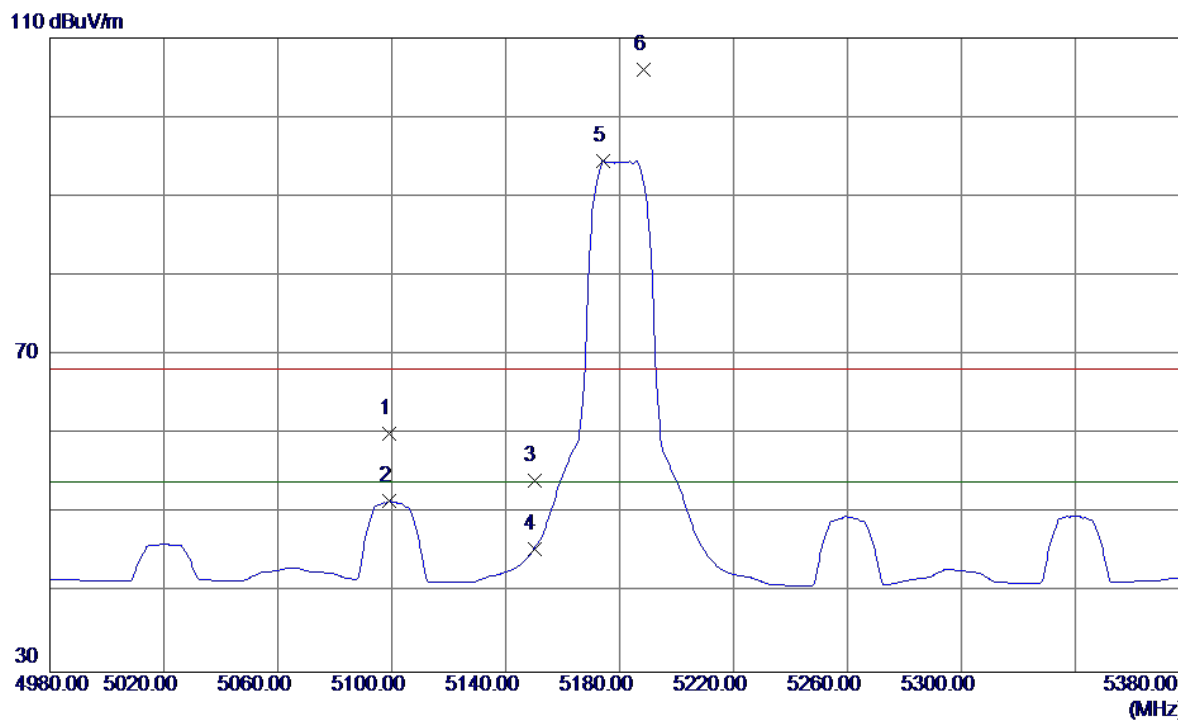


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5099.2000	19.92	40.11	60.03	68.30	-8.27	Peak	
2	5099.2000	11.42	40.11	51.53	54.00	-2.47	AVG	
3	5150.0000	13.96	40.22	54.18	68.30	-14.12	Peak	
4	5150.0000	5.35	40.22	45.57	54.00	-8.43	AVG	
5	5174.4000	54.23	40.27	94.50	54.00	40.50	AVG	No Limit
6	5188.4000	65.63	40.30	105.93	68.30	37.63	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Horizontal

80 dBuV/m

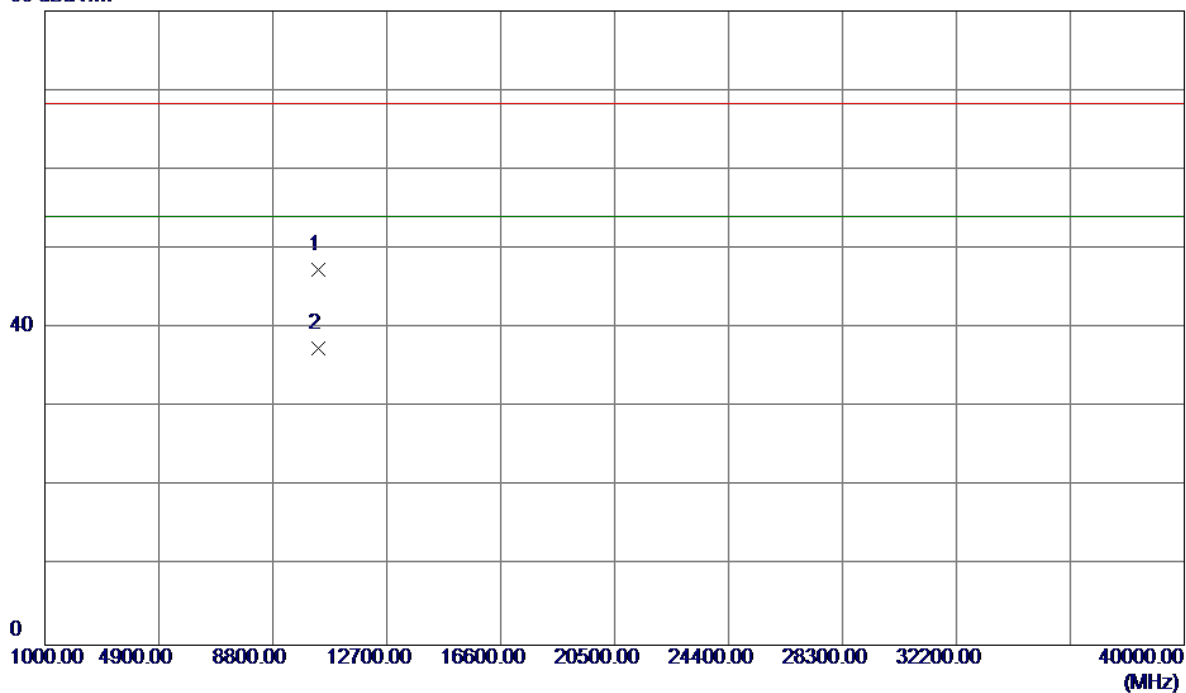


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10360.0100	33.55	13.86	47.41	68.30	-20.89	Peak	
2	10360.0100	23.57	13.86	37.43	54.00	-16.57	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Vertical

115 dBuV/m

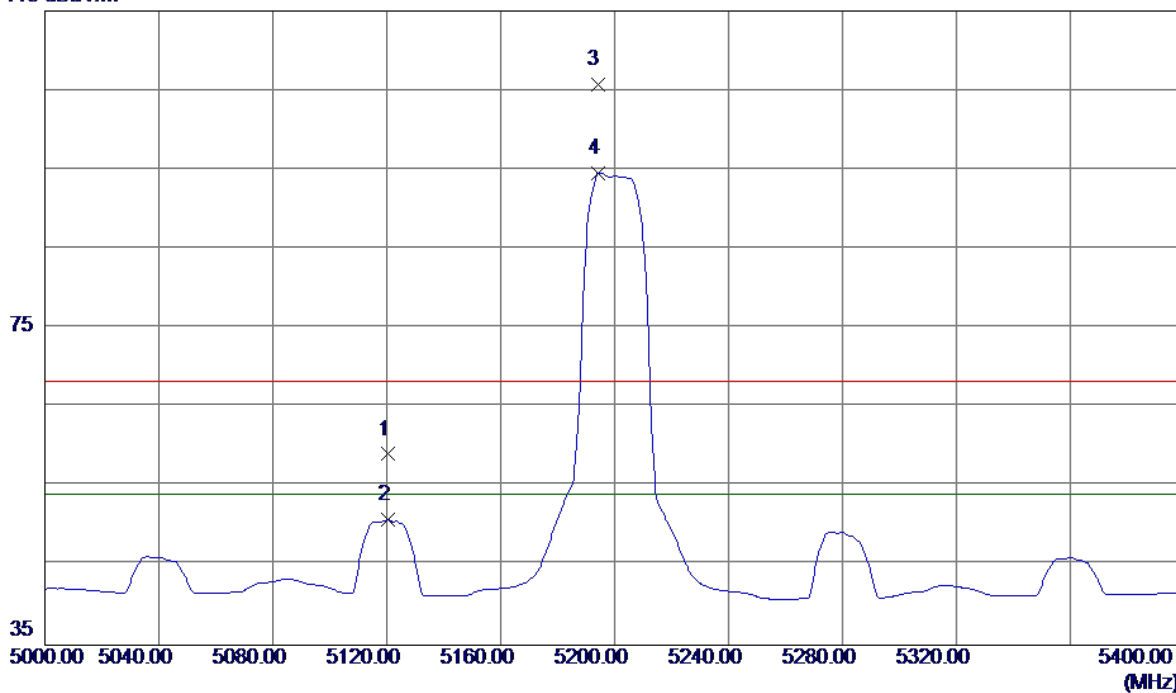


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5120.4000	18.92	40.16	59.08	68.30	-9.22	Peak	
2	5120.4000	10.66	40.16	50.82	54.00	-3.18	AVG	
3	5194.0000	65.36	40.31	105.67	68.30	37.37	Peak	No Limit
4	5194.4000	54.28	40.31	94.59	54.00	40.59	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Vertical


80 dBuV/m

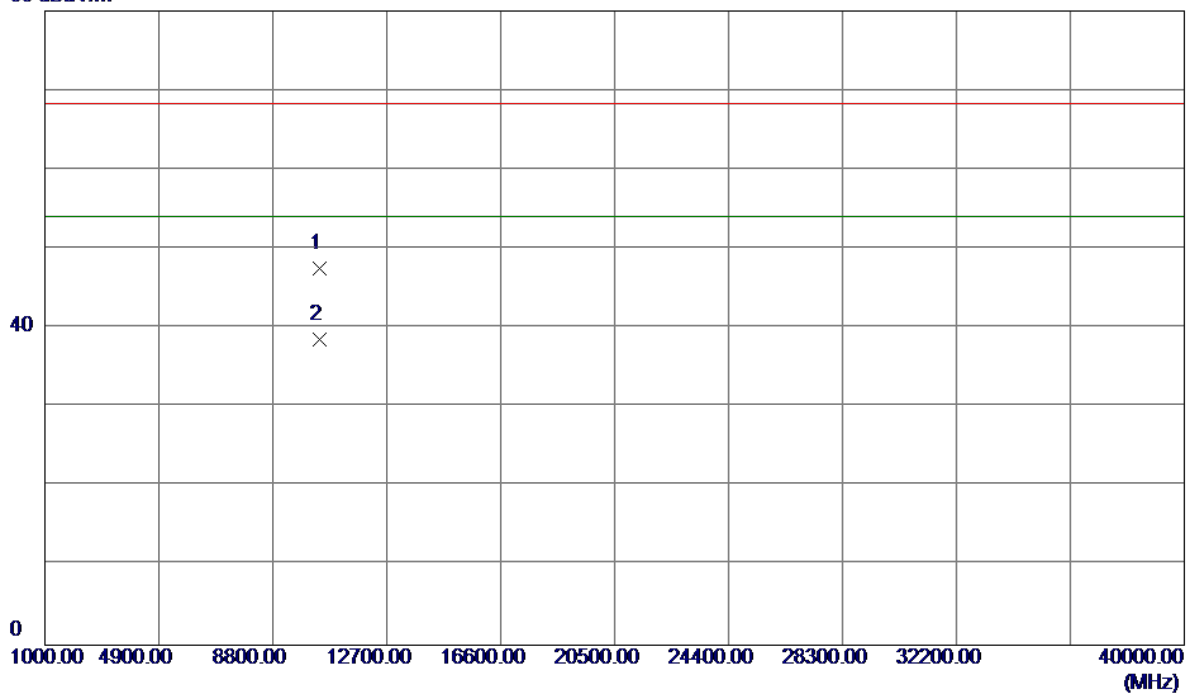

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10400.3500	33.78	13.80	47.58	68.30	-20.72	Peak	
2	10400.3500	24.81	13.80	38.61	54.00	-15.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Horizontal

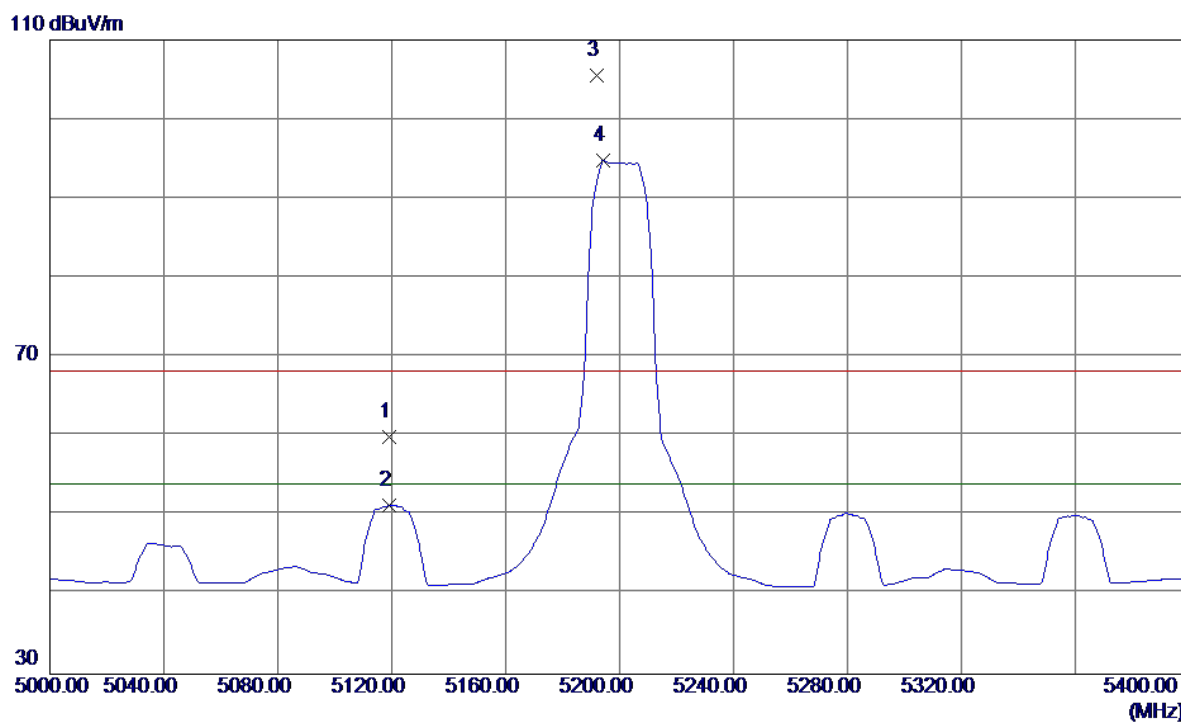


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5119.2000	19.80	40.15	59.95	68.30	-8.35	Peak	
2	5119.2000	11.19	40.15	51.34	54.00	-2.66	AVG	
3	5192.0000	65.24	40.31	105.55	68.30	37.25	Peak	No Limit
4	5194.4000	54.52	40.31	94.83	54.00	40.83	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Horizontal

80 dBuV/m

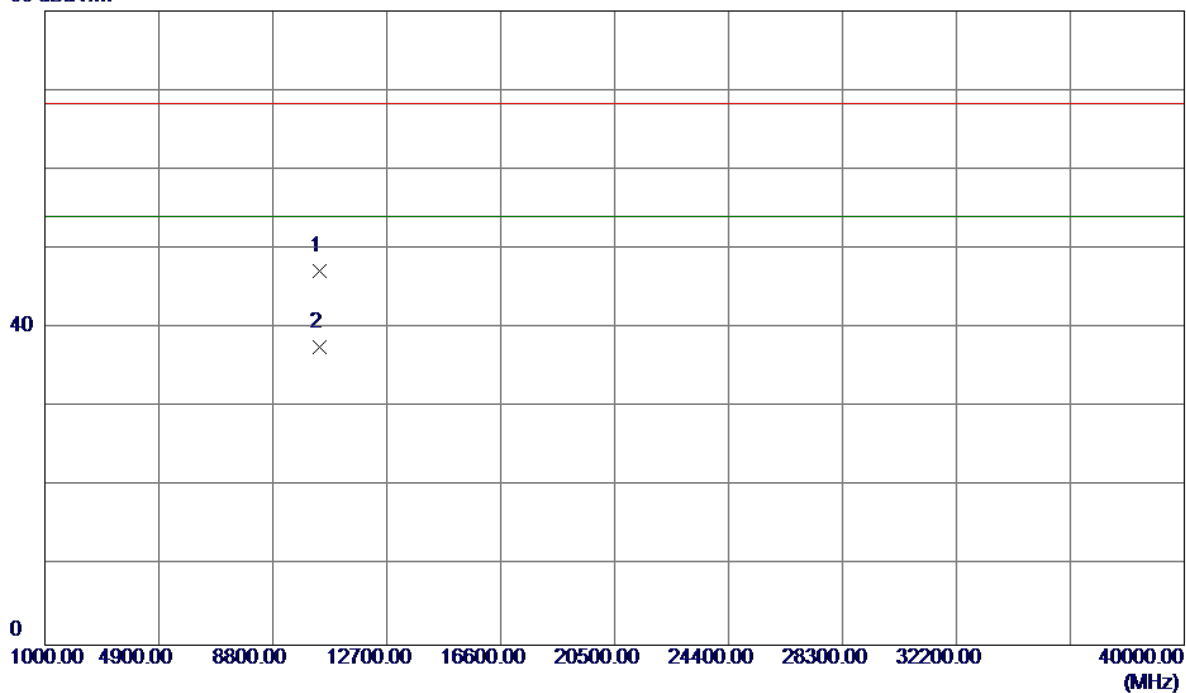


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10400.6210	33.33	13.80	47.13	68.30	-21.17	Peak	
2	10400.5540	23.74	13.80	37.54	54.00	-16.46	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

115 dBuV/m

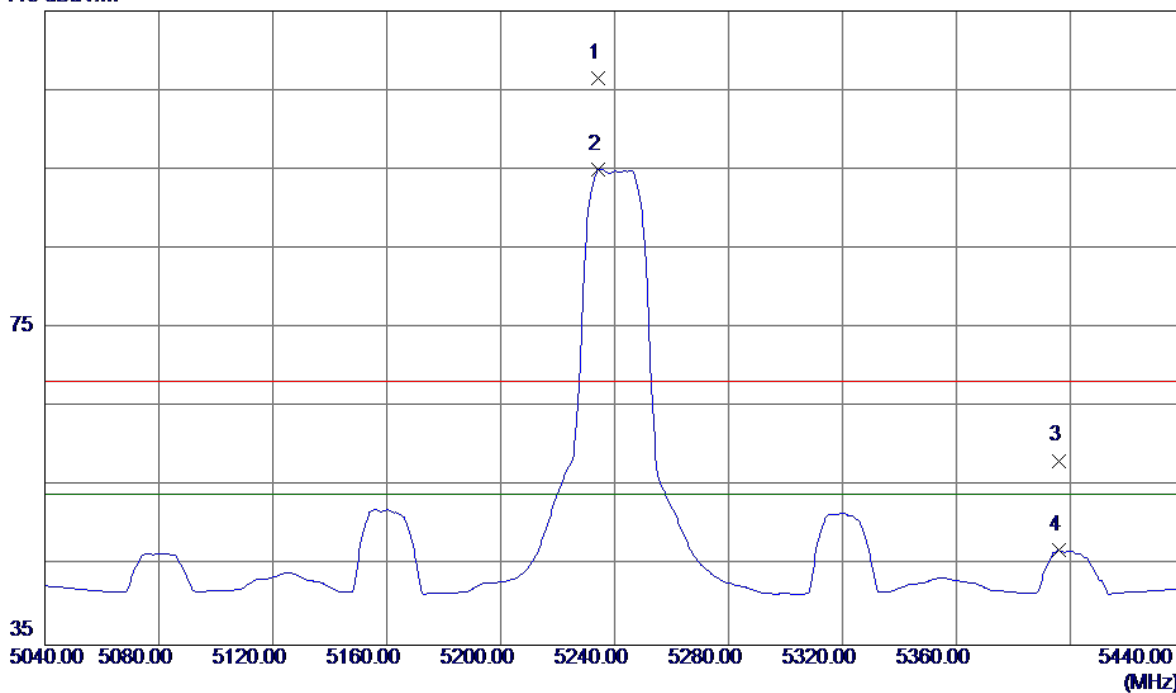


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5234.4000	66.14	40.40	106.54	68.30	38.24	Peak	No Limit
2	5234.4000	54.63	40.40	95.03	54.00	41.03	AVG	No Limit
3	5396.0000	17.54	40.74	58.28	68.30	-10.02	Peak	
4	5396.0000	6.19	40.74	46.93	54.00	-7.07	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

80 dBuV/m

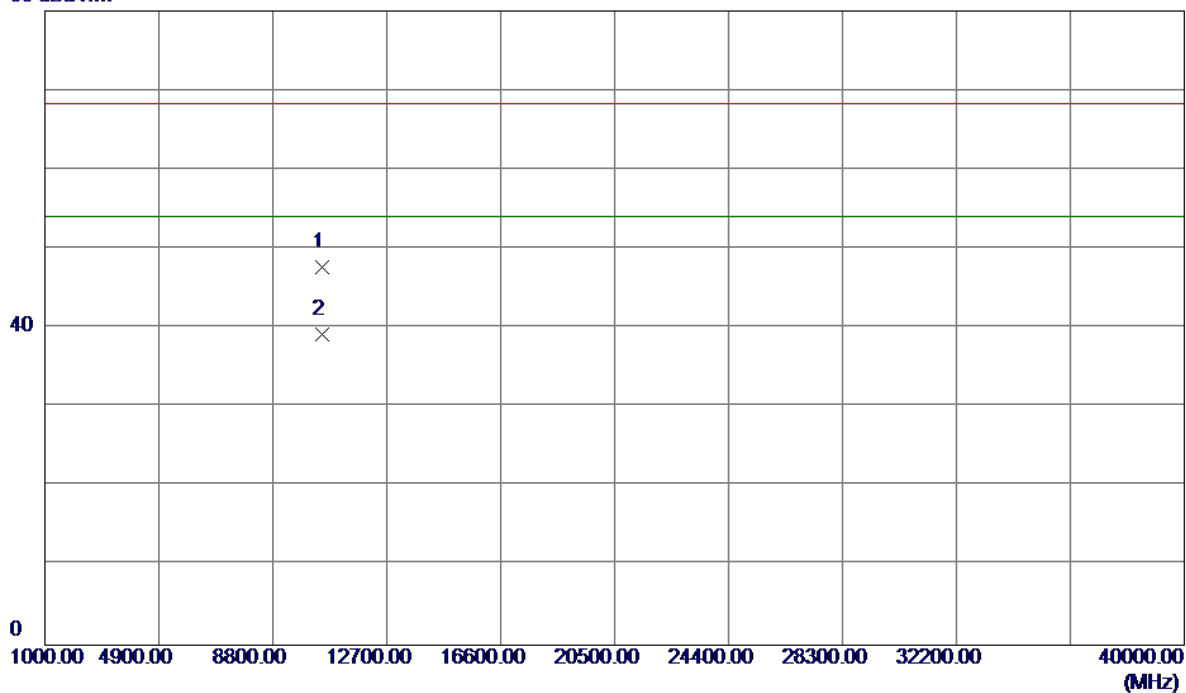


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10480.6220	34.01	13.69	47.70	68.30	-20.60	Peak	
2	10480.1230	25.47	13.69	39.16	54.00	-14.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

115 dBuV/m

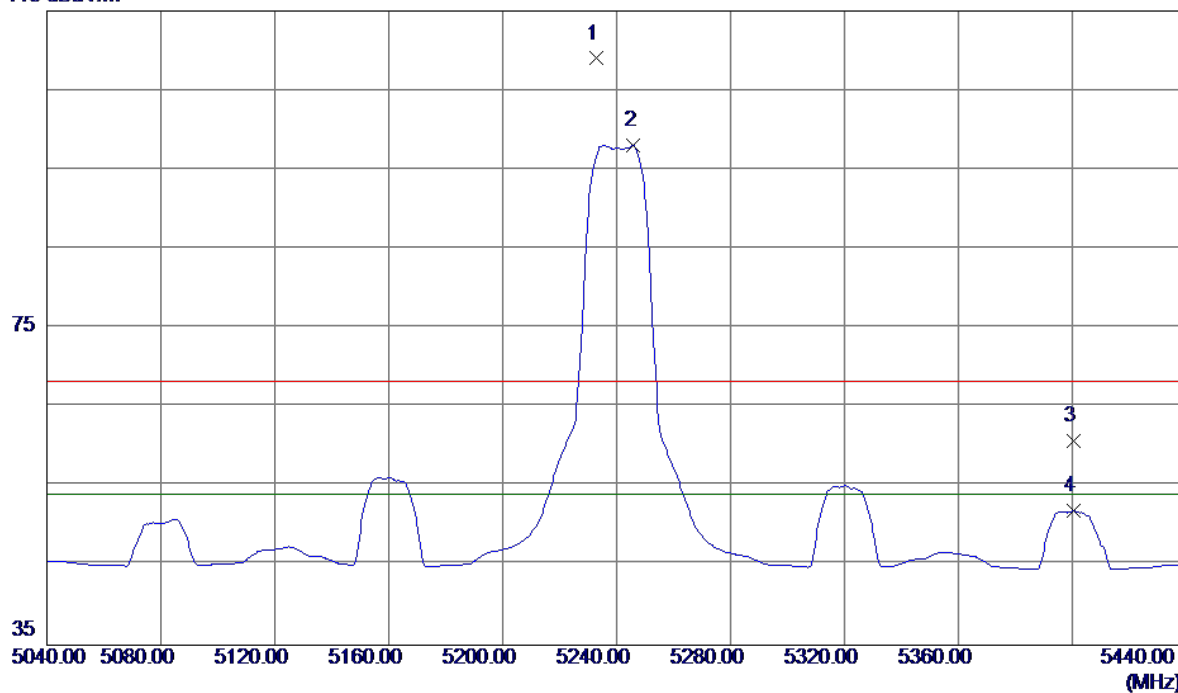


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5232.8000	68.61	40.39	109.00	68.30	40.70	Peak	No Limit
2	5246.0000	57.63	40.42	98.05	54.00	44.05	AVG	No Limit
3	5400.4000	19.95	40.75	60.70	68.30	-7.60	Peak	
4	5400.4000	11.19	40.75	51.94	54.00	-2.06	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

80 dBuV/m

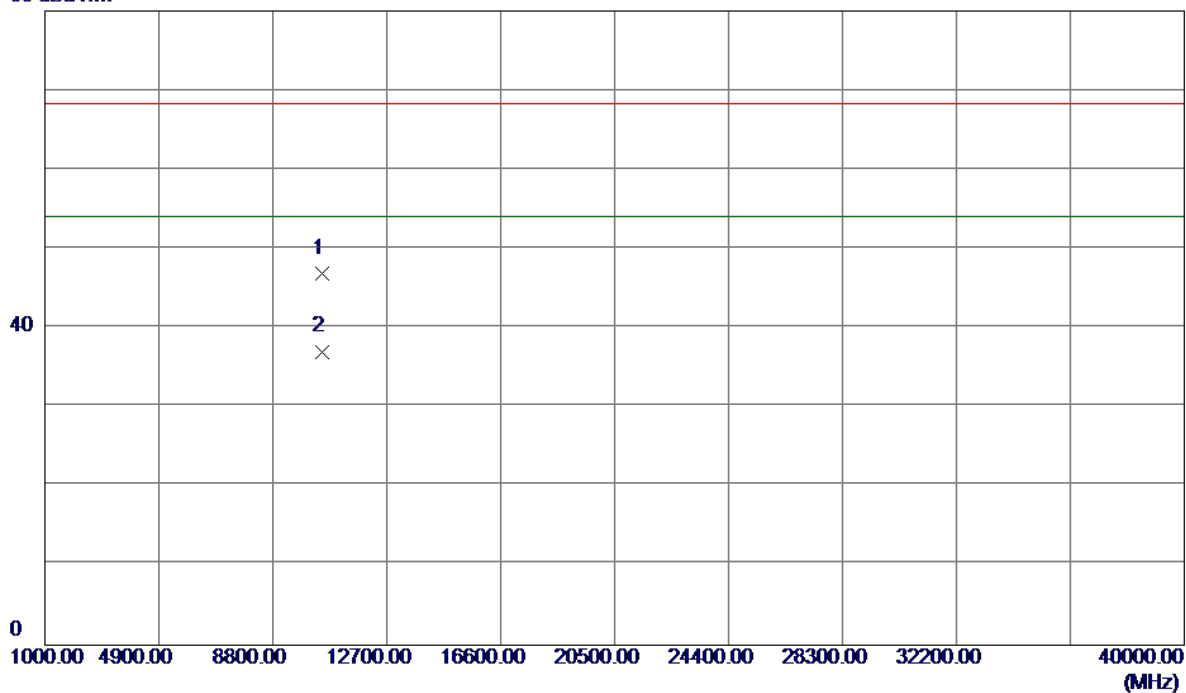


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10480.3400	33.12	13.69	46.81	68.30	-21.49	Peak	
2	10480.3400	23.35	13.69	37.04	54.00	-16.96	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

115 dBuV/m

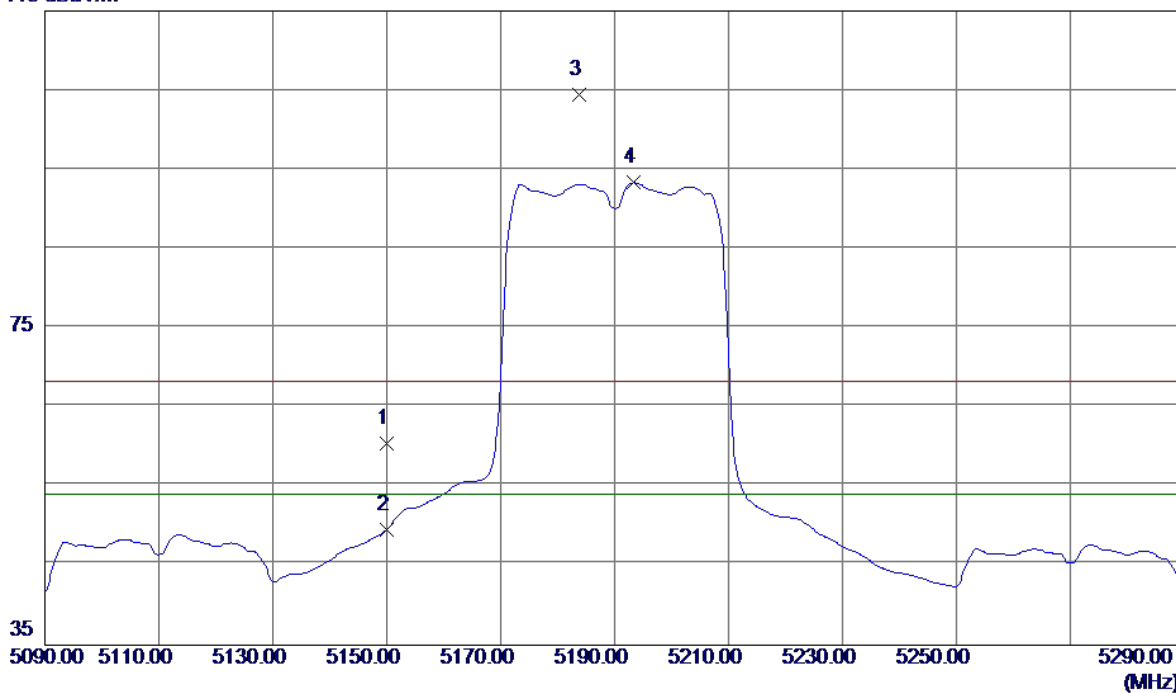


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	20.22	40.22	60.44	68.30	-7.86	Peak	
2	5150.0000	9.32	40.22	49.54	54.00	-4.46	AVG	
3	5183.8000	64.18	40.29	104.47	68.30	36.17	Peak	No Limit
4	5193.4000	53.02	40.31	93.33	54.00	39.33	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

80 dBuV/m

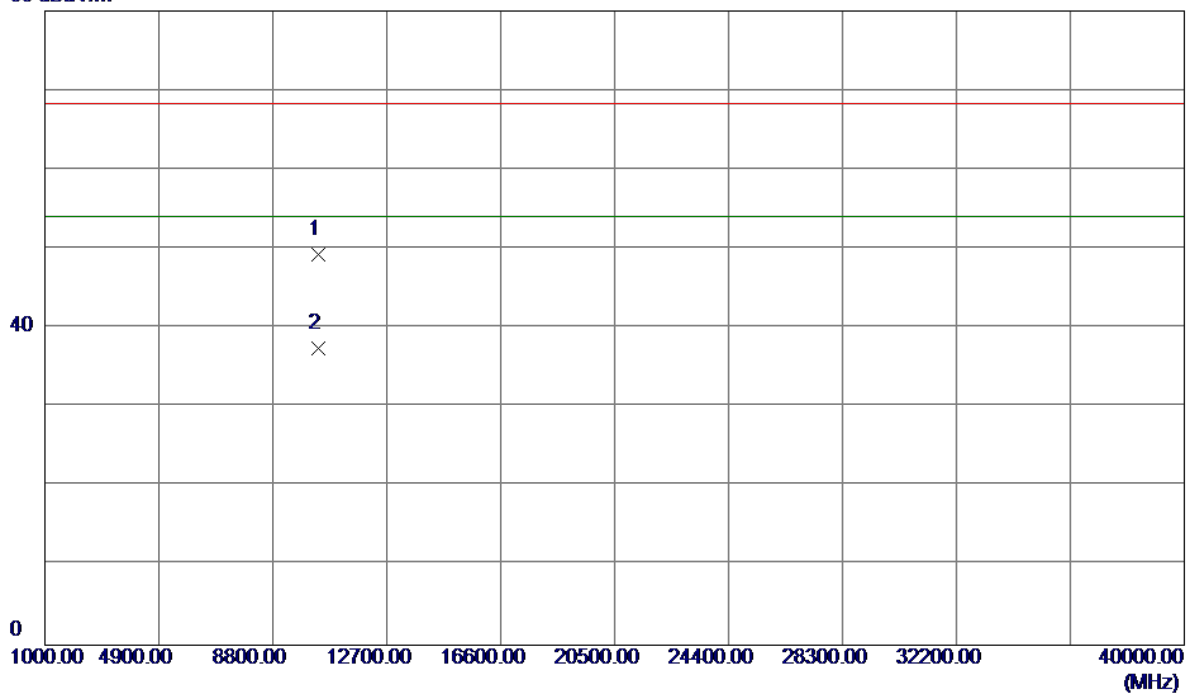


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10380.3099	35.45	13.83	49.28	68.30	-19.02	Peak	
2	10380.3099	23.63	13.83	37.46	54.00	-16.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

115 dBuV/m

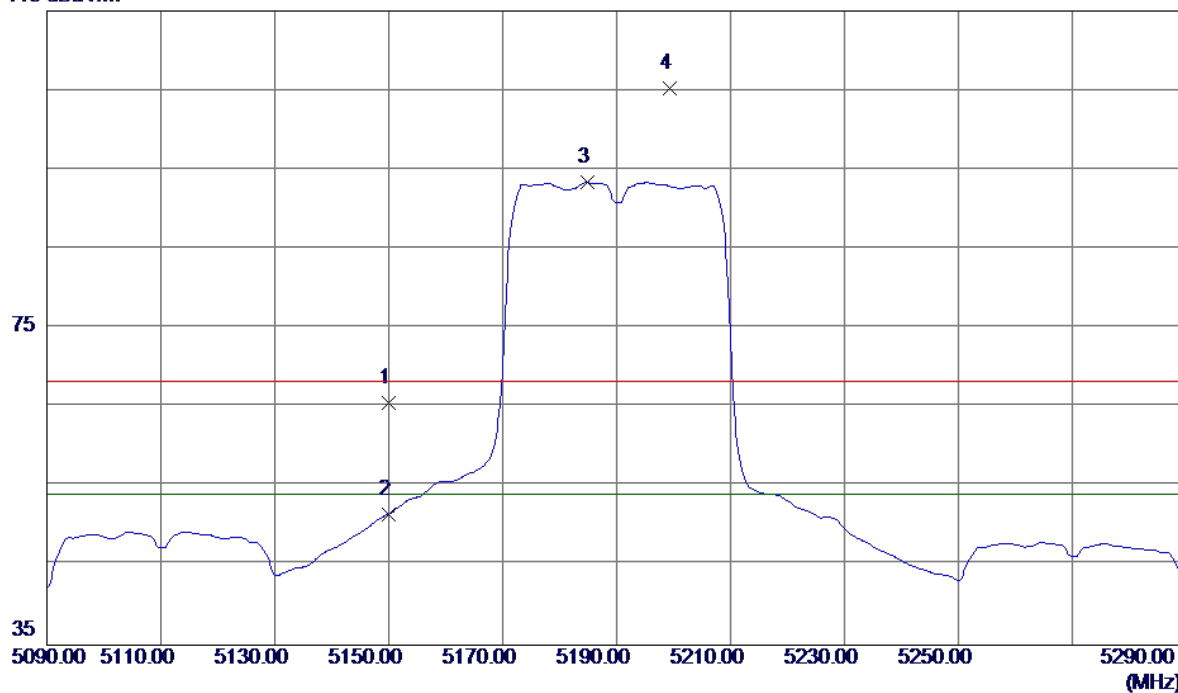


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	25.40	40.22	65.62	68.30	-2.68	Peak	
2	5150.0000	11.33	40.22	51.55	54.00	-2.45	AVG	
3	5184.8000	53.10	40.29	93.39	54.00	39.39	AVG	No Limit
4	5199.4000	64.97	40.32	105.29	68.30	36.99	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

80 dBuV/m

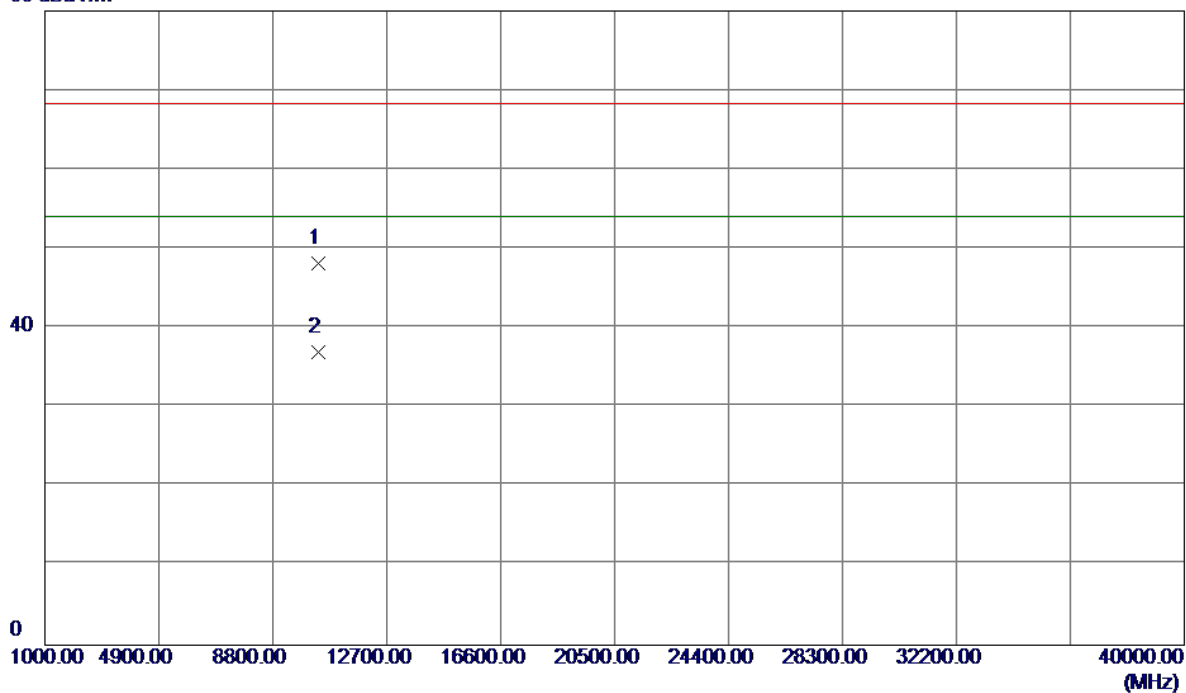


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10381.5199	34.40	13.83	48.23	68.30	-20.07	Peak	
2	10381.5199	23.06	13.83	36.89	54.00	-17.11	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

115 dBuV/m

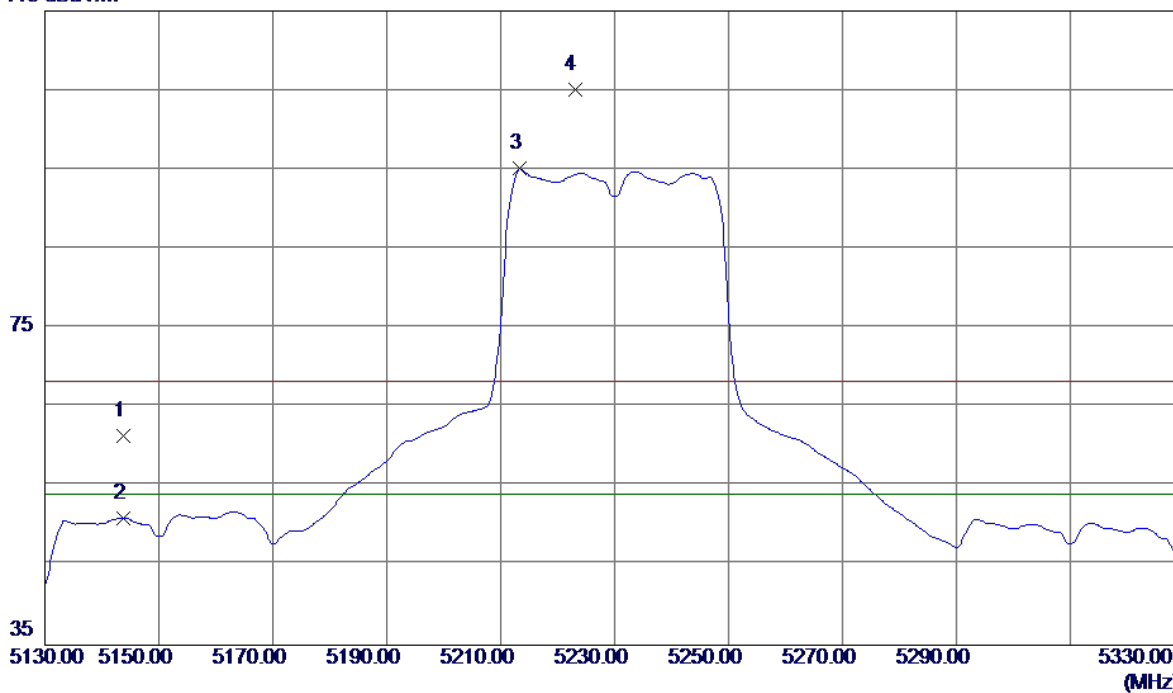


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5143.8000	21.26	40.20	61.46	68.30	-6.84	Peak	
2	5143.8000	10.82	40.20	51.02	54.00	-2.98	AVG	
3	5213.4000	54.74	40.35	95.09	54.00	41.09	AVG	No Limit
4	5223.0000	64.77	40.37	105.14	68.30	36.84	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

80 dBuV/m

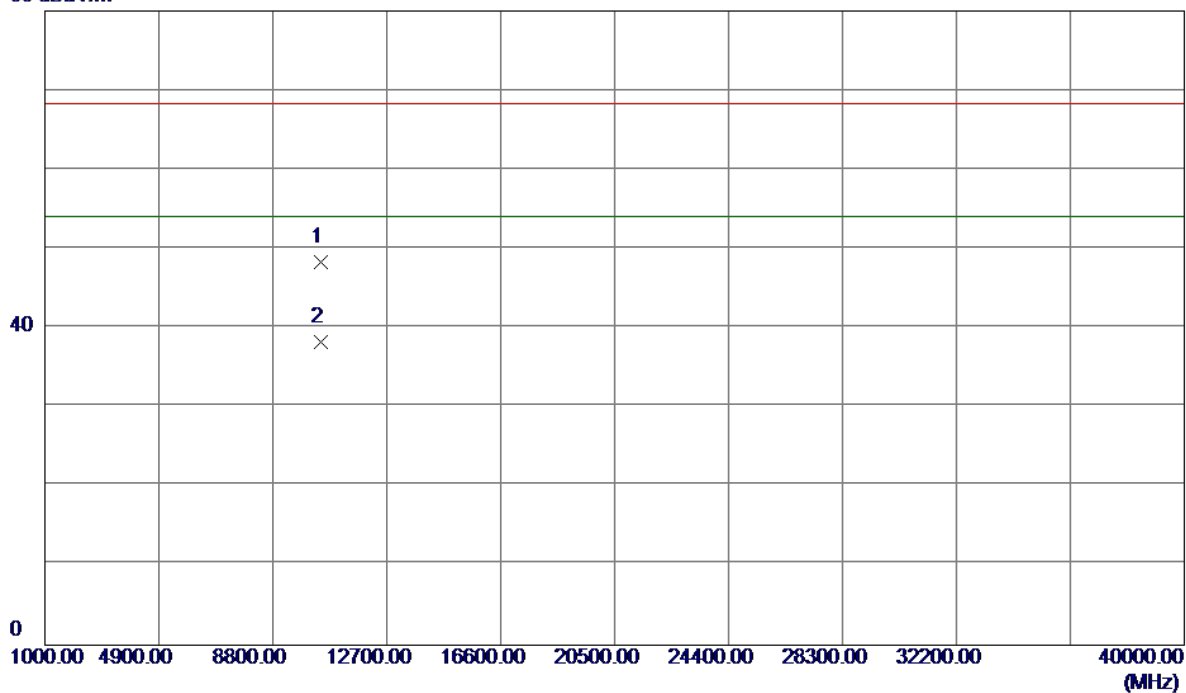


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.1449	34.56	13.72	48.28	68.30	-20.02	Peak	
2	10460.5670	24.46	13.72	38.18	54.00	-15.82	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

115 dBuV/m

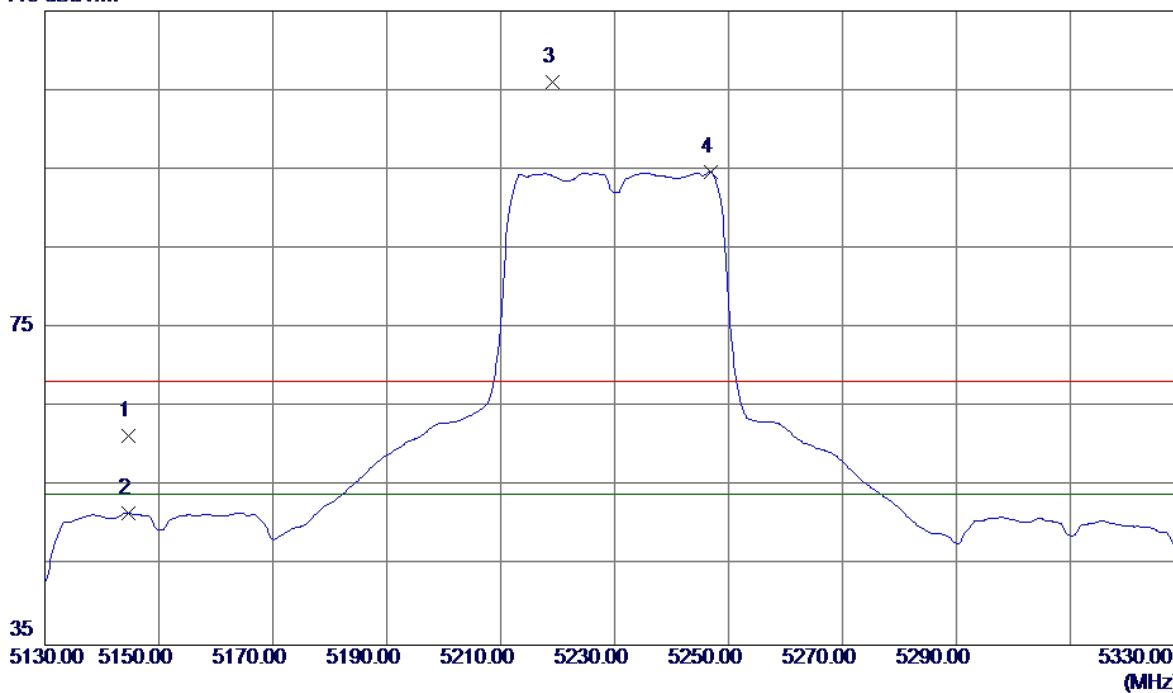


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5144.6000	21.16	40.21	61.37	68.30	-6.93	Peak	
2	5144.6000	11.50	40.21	51.71	54.00	-2.29	AVG	
3	5219.2000	65.63	40.36	105.99	68.30	37.69	Peak	No Limit
4	5246.8000	54.32	40.42	94.74	54.00	40.74	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

80 dBuV/m

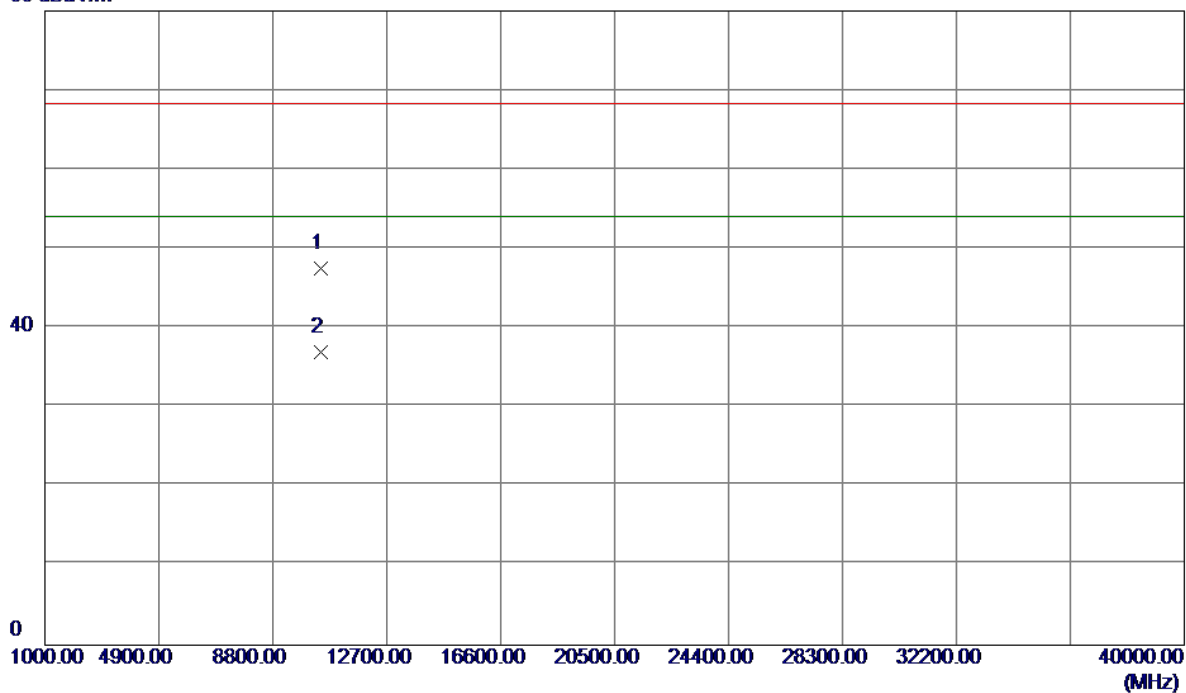


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.1800	33.83	13.72	47.55	68.30	-20.75	Peak	
2	10460.1800	23.24	13.72	36.96	54.00	-17.04	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

115 dBuV/m

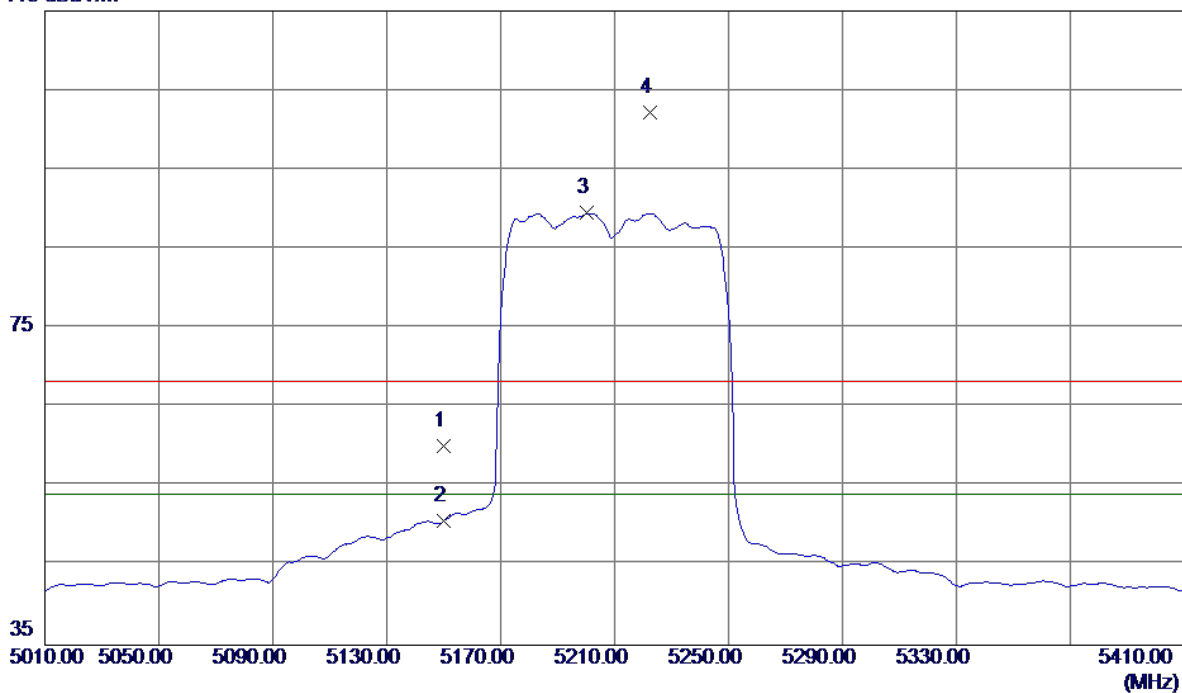


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	19.91	40.22	60.13	68.30	-8.17	Peak	
2	5150.0000	10.45	40.22	50.67	54.00	-3.33	AVG	
3	5200.4000	49.18	40.32	89.50	54.00	35.50	AVG	No Limit
4	5222.4000	61.77	40.37	102.14	68.30	33.84	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

80 dBuV/m

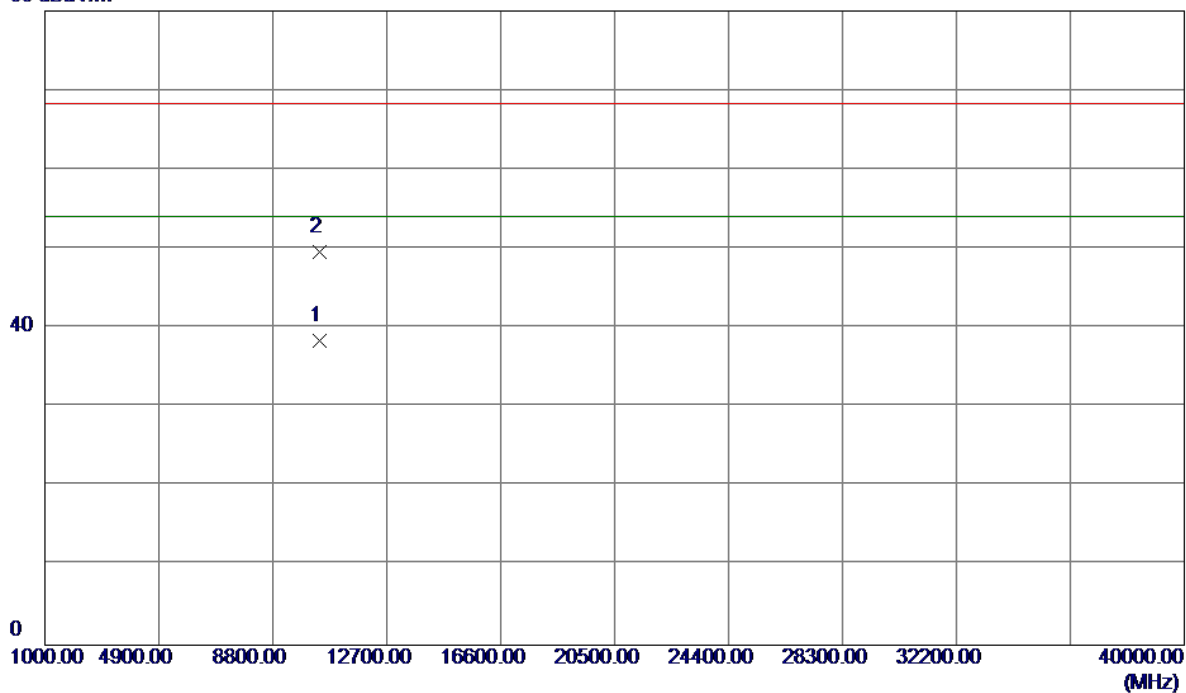


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10422.6000	24.57	13.77	38.34	54.00	-15.66	AVG	
2	10422.7000	35.79	13.77	49.56	68.30	-18.74	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal

115 dBuV/m

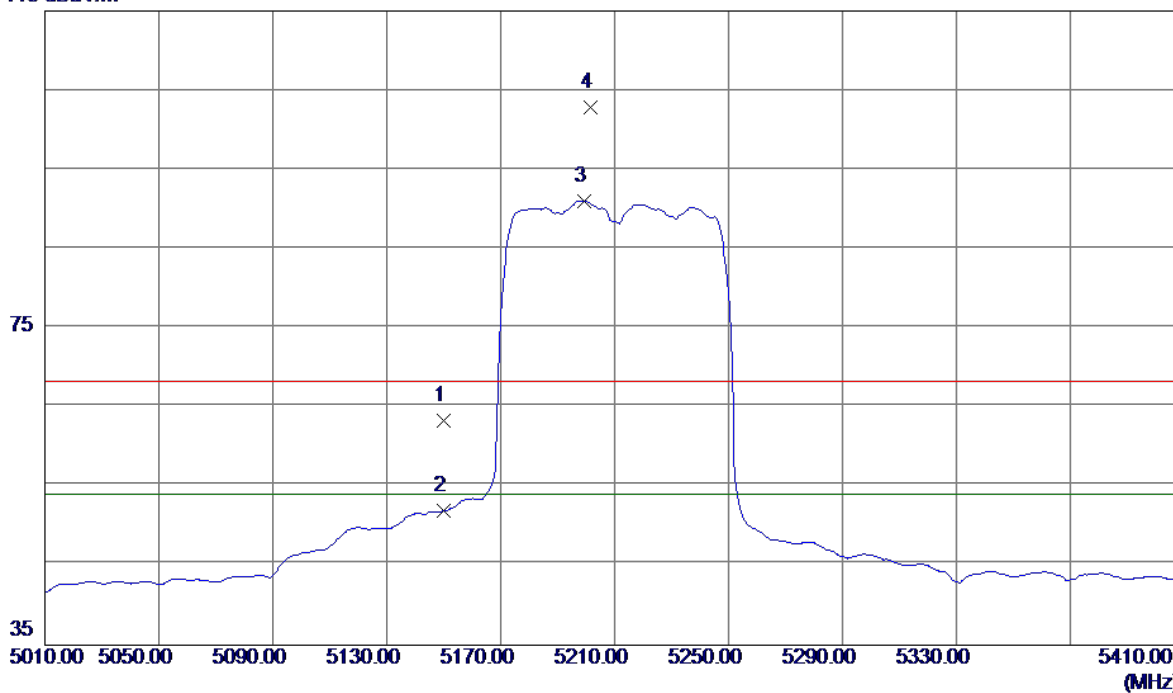


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.13	40.22	63.35	68.30	-4.95	Peak	
2	5150.0000	11.73	40.22	51.95	54.00	-2.05	AVG	
3	5199.2000	50.72	40.32	91.04	54.00	37.04	AVG	No Limit
4	5201.6000	62.52	40.33	102.85	68.30	34.55	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal

80 dBuV/m

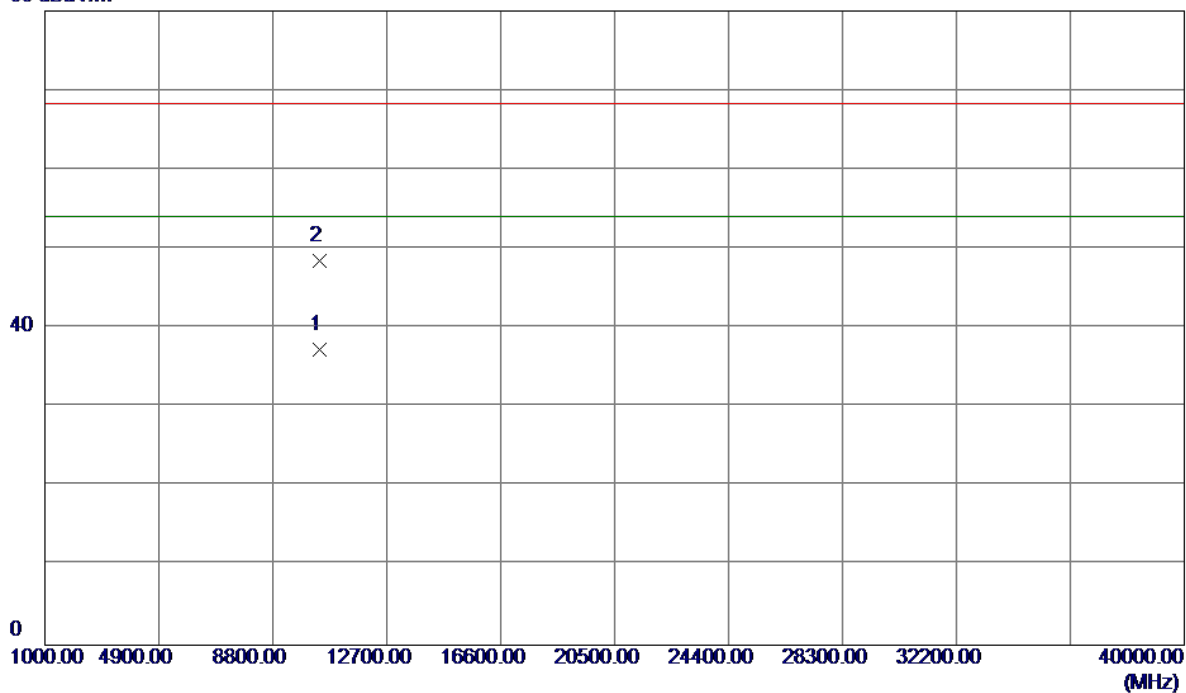


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10421.1200	23.57	13.77	37.34	54.00	-16.66	AVG	
2	10421.5630	34.74	13.77	48.51	68.30	-19.79	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Vertical

115 dBuV/m

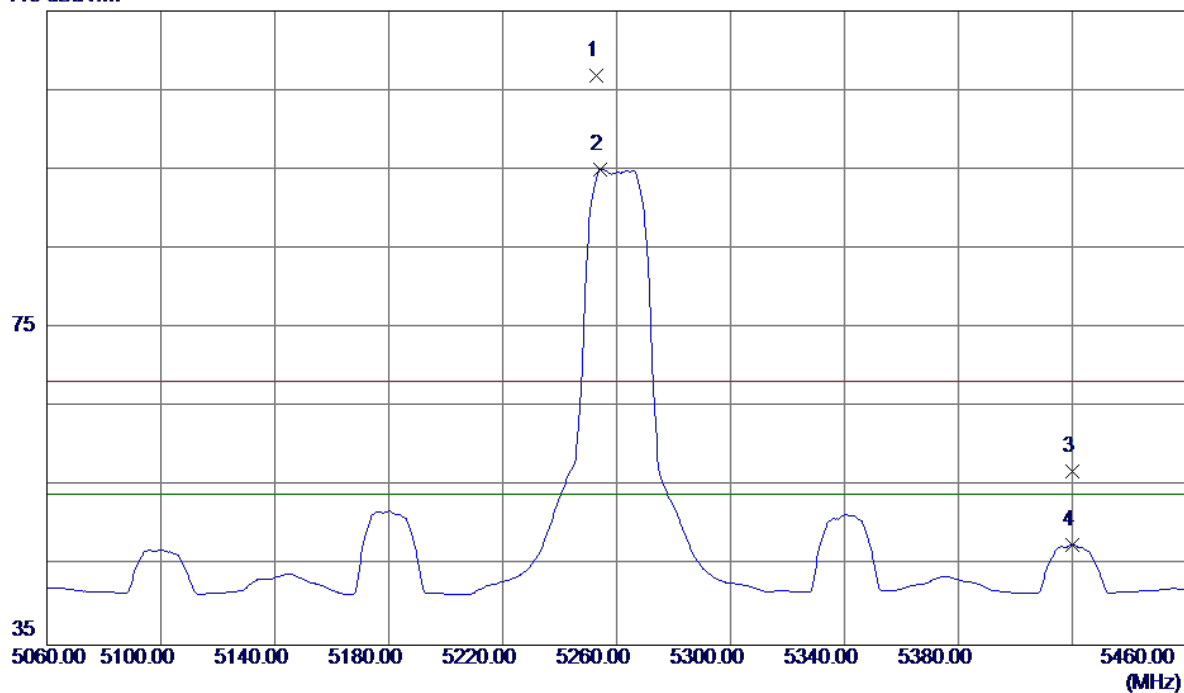


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5252.8000	66.32	40.44	106.76	68.30	38.46	Peak	No Limit
2	5254.4000	54.60	40.44	95.04	54.00	41.04	AVG	No Limit
3	5420.0000	16.12	40.79	56.91	68.30	-11.39	Peak	
4	5420.0000	6.92	40.79	47.71	54.00	-6.29	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Vertical


80 dBuV/m

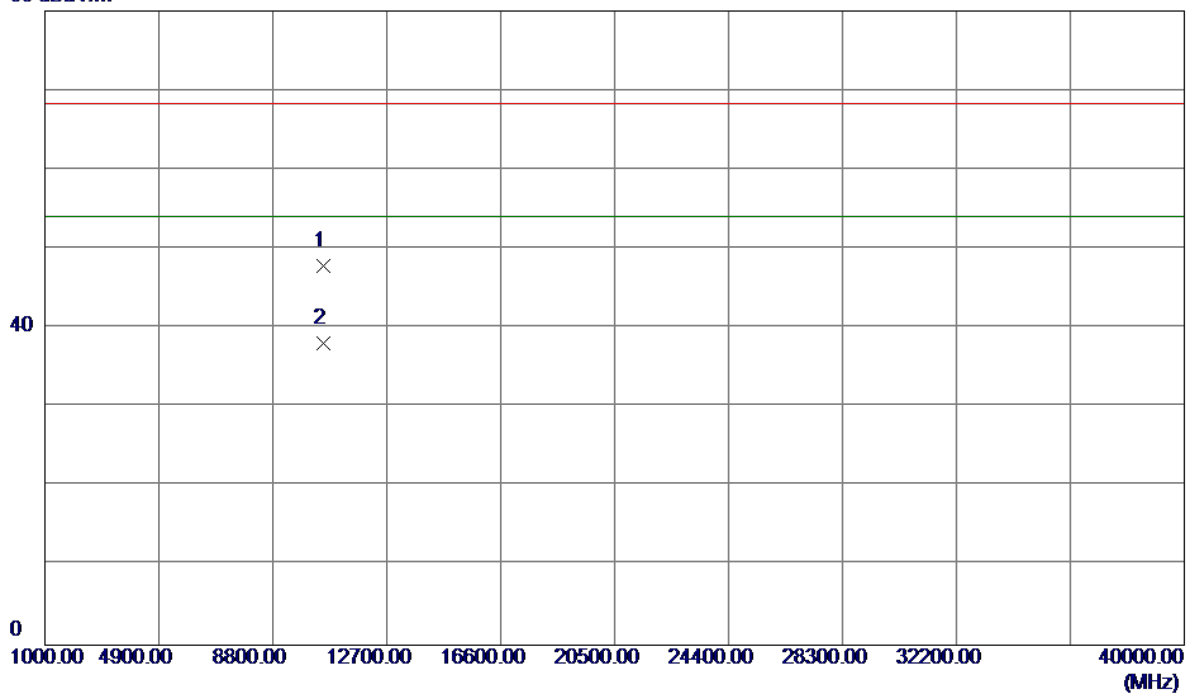

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10520.3400	34.10	13.75	47.85	68.30	-20.45	Peak	
2	10520.3400	24.37	13.75	38.12	54.00	-15.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Horizontal

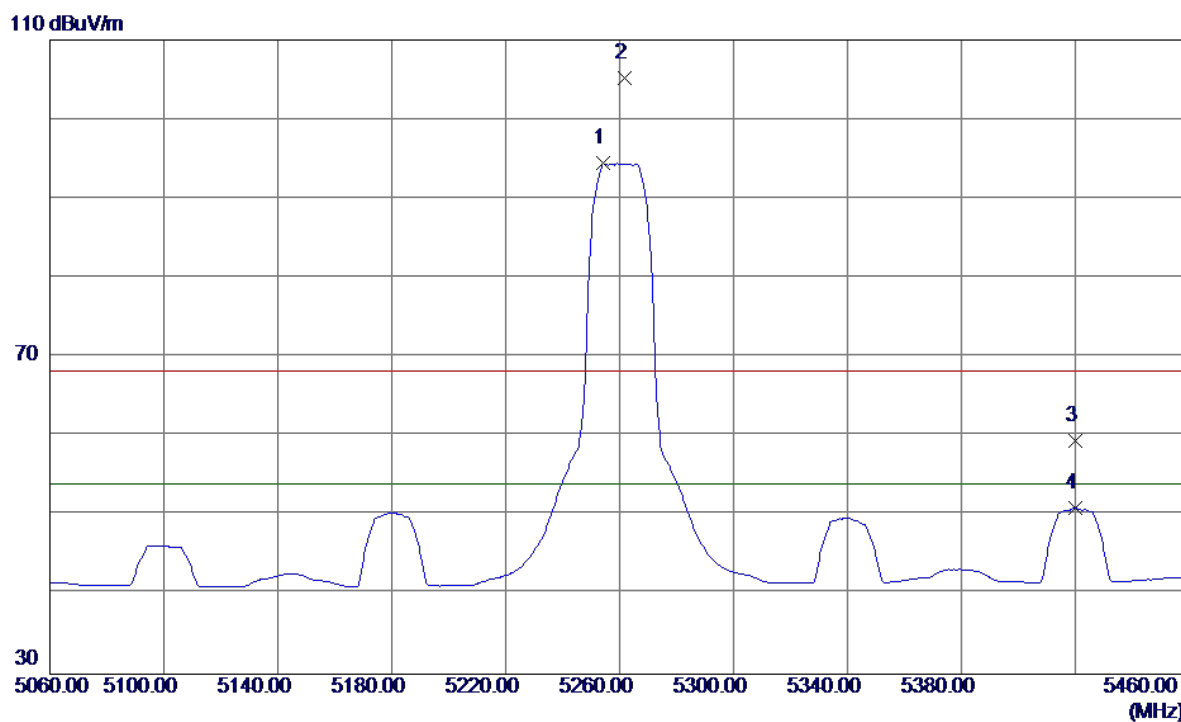


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5254.4000	53.98	40.44	94.42	54.00	40.42	AVG	No Limit
2	5261.6000	64.79	40.45	105.24	68.30	36.94	Peak	No Limit
3	5420.0000	18.69	40.79	59.48	68.30	-8.82	Peak	
4	5420.0000	10.11	40.79	50.90	54.00	-3.10	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Horizontal

80 dBuV/m

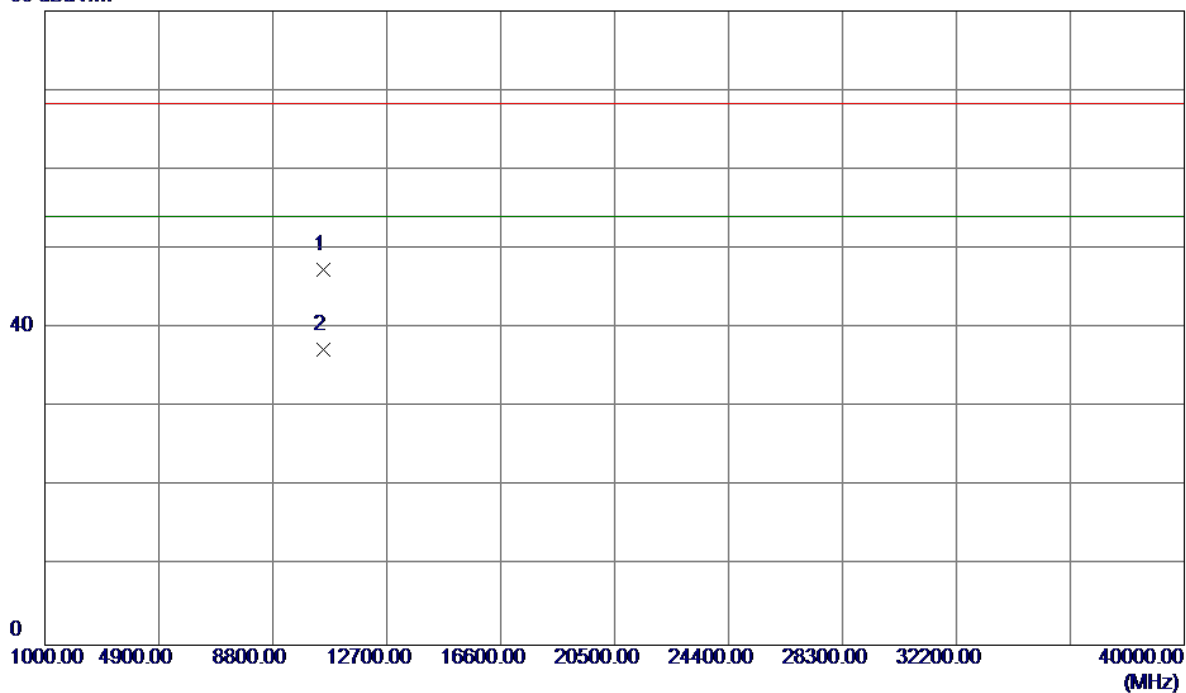


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.6689	33.68	13.75	47.43	68.30	-20.87	Peak	
2	10520.5500	23.53	13.75	37.28	54.00	-16.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Vertical

115 dBuV/m

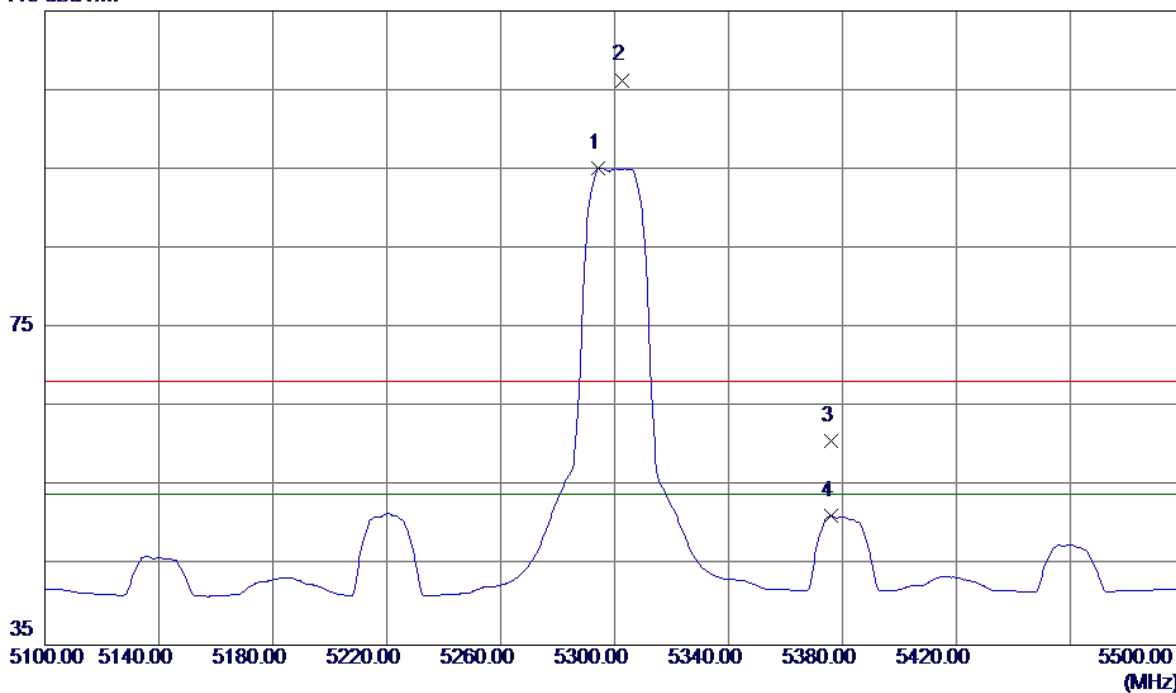


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5294.4000	54.67	40.52	95.19	54.00	41.19	AVG	No Limit
2	5302.8000	65.74	40.54	106.28	68.30	37.98	Peak	No Limit
3	5376.0000	20.11	40.70	60.81	68.30	-7.49	Peak	
4	5376.0000	10.58	40.70	51.28	54.00	-2.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Vertical

80 dBuV/m

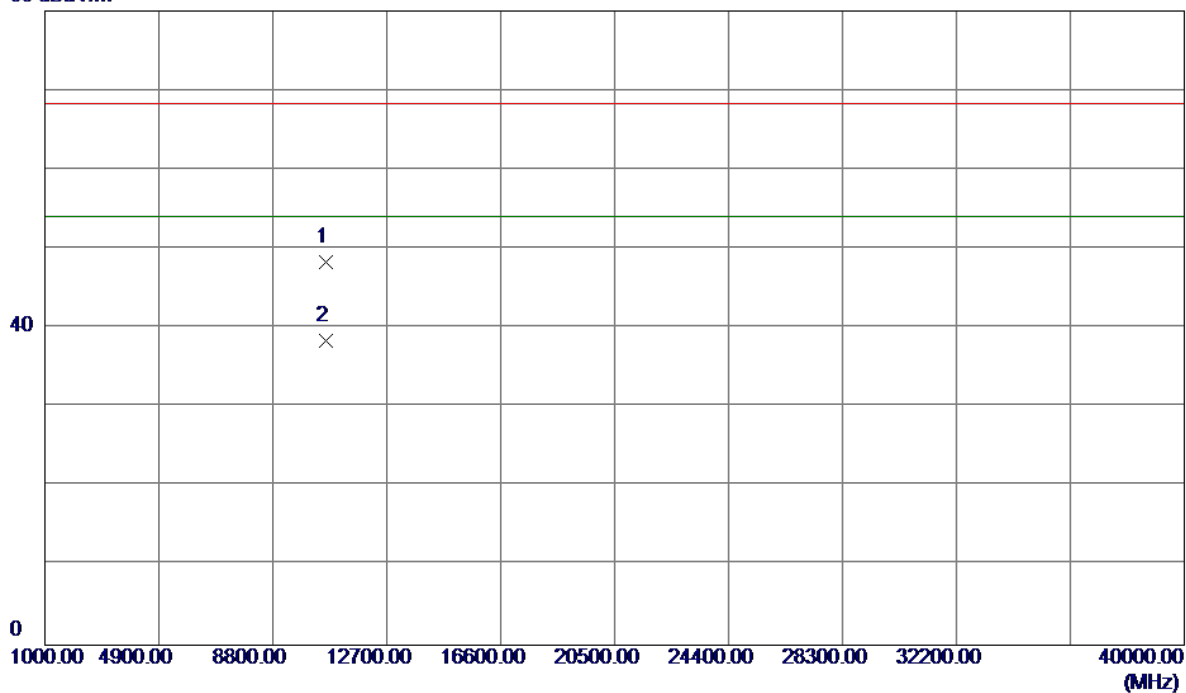


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10600.3339	34.25	14.08	48.33	68.30	-19.97	Peak	
2	10600.1710	24.37	14.08	38.45	54.00	-15.55	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Horizontal

115 dBuV/m

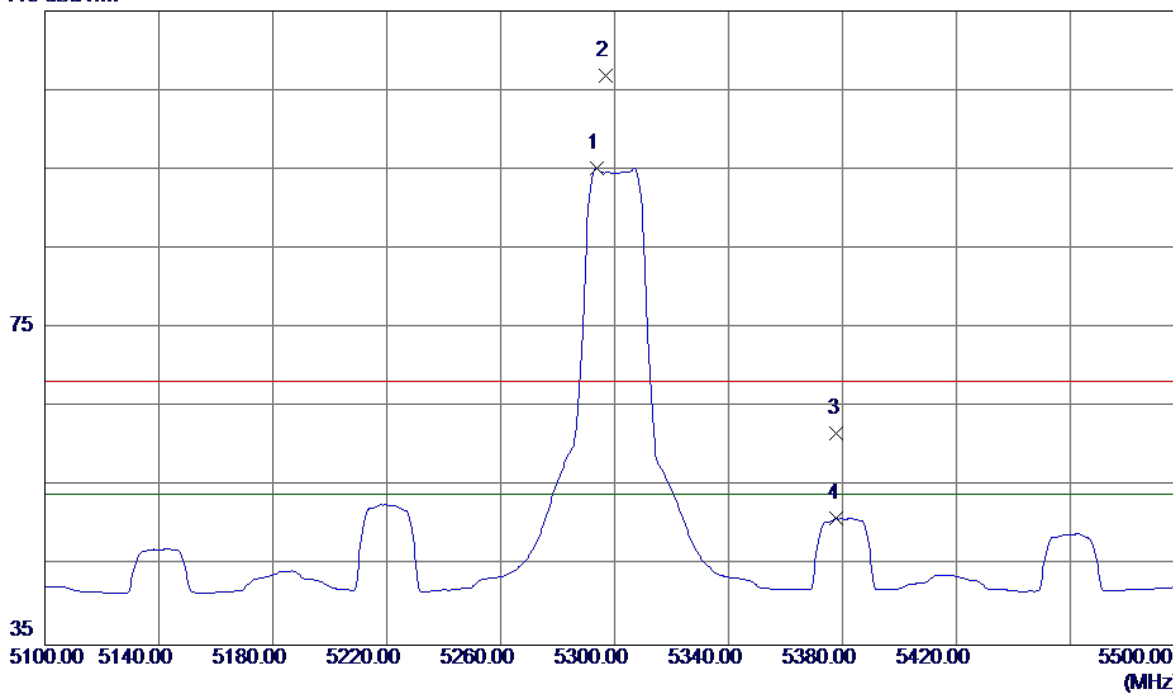


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5293.6000	54.70	40.52	95.22	54.00	41.22	AVG	No Limit
2	5296.8000	66.26	40.53	106.79	68.30	38.49	Peak	No Limit
3	5378.0000	21.08	40.70	61.78	68.30	-6.52	Peak	
4	5378.0000	10.32	40.70	51.02	54.00	-2.98	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Horizontal

80 dBuV/m

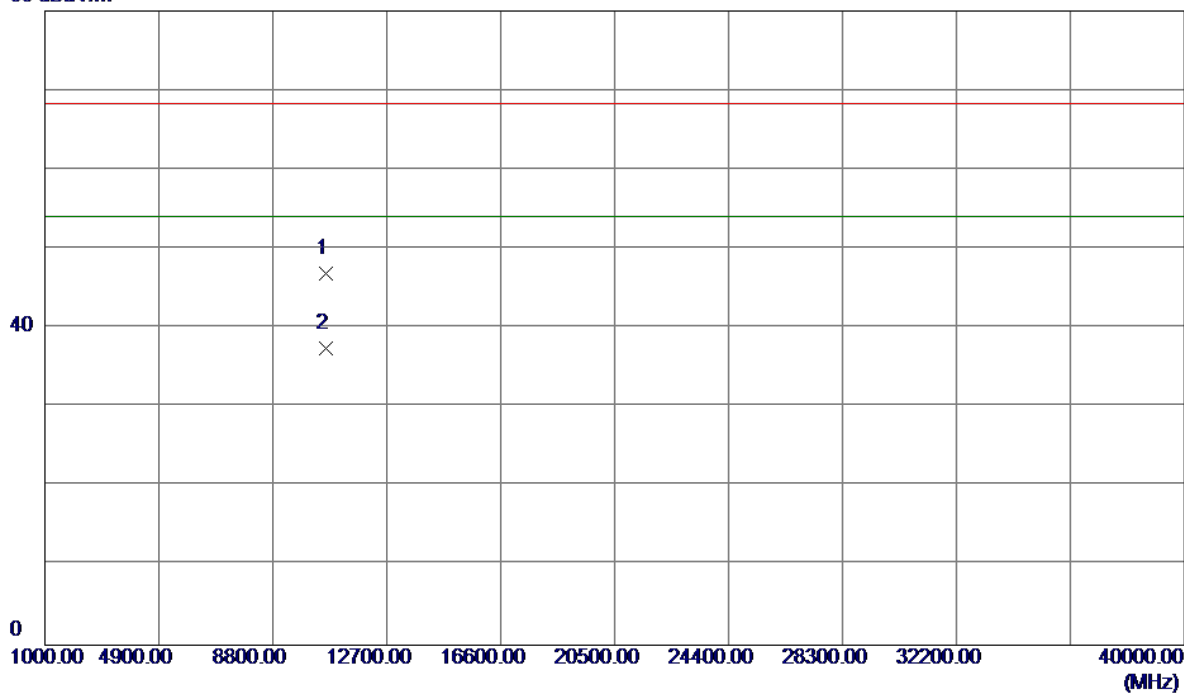


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.7100	32.79	14.08	46.87	68.30	-21.43	Peak	
2	10600.7100	23.38	14.08	37.46	54.00	-16.54	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical

115 dBuV/m

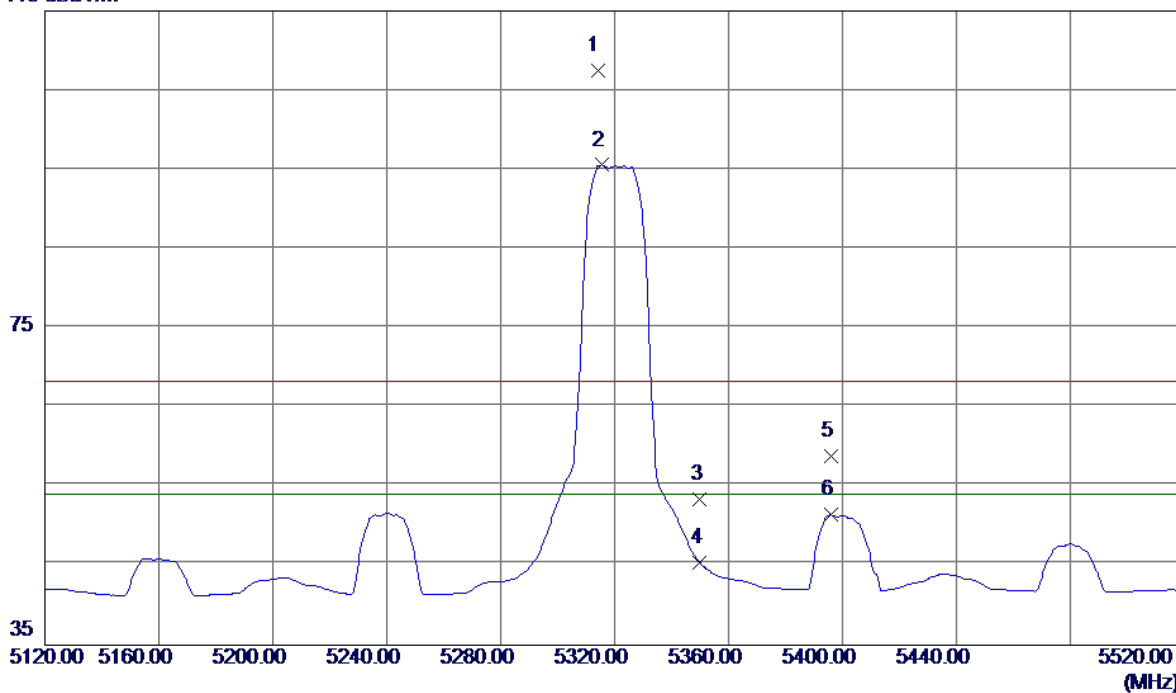


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5314.0000	66.94	40.57	107.51	68.30	39.21	Peak	No Limit
2	5315.6000	54.99	40.57	95.56	54.00	41.56	AVG	No Limit
3	5350.0000	12.78	40.64	53.42	68.30	-14.88	Peak	
4	5350.0000	4.79	40.64	45.43	54.00	-8.57	AVG	
5	5396.0000	18.12	40.74	58.86	68.30	-9.44	Peak	
6	5396.0000	10.67	40.74	51.41	54.00	-2.59	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical


80 dBuV/m

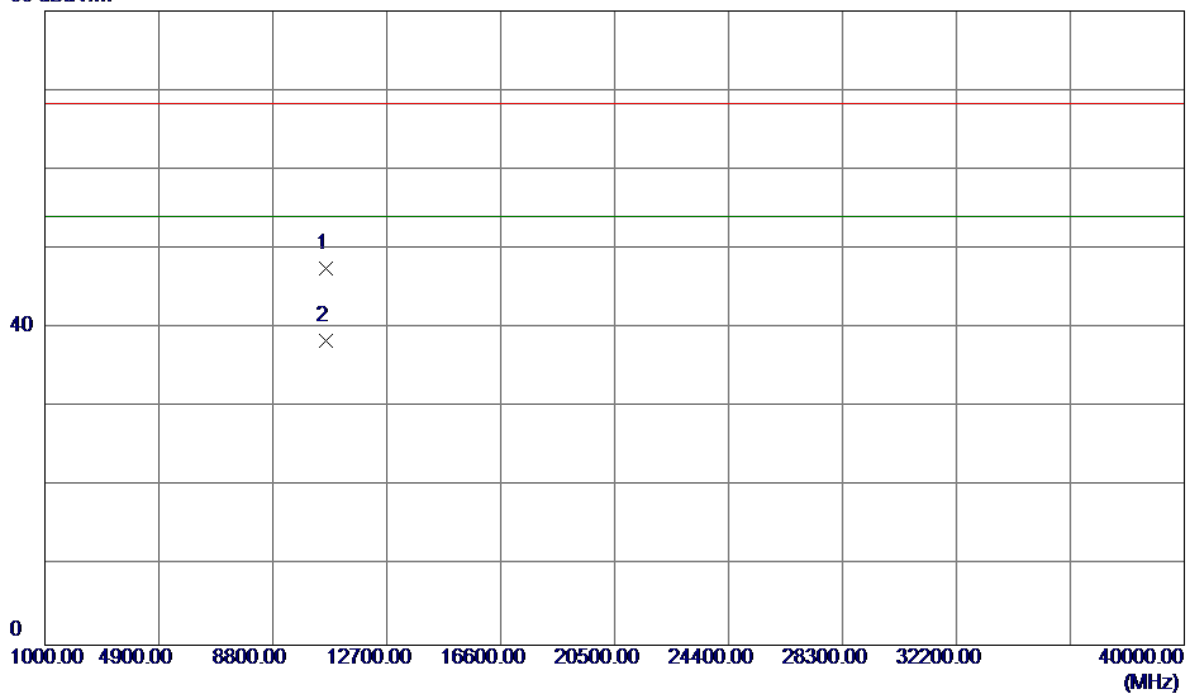

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10640.2800	33.31	14.25	47.56	68.30	-20.74	Peak	
2	10640.2800	24.09	14.25	38.34	54.00	-15.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Horizontal

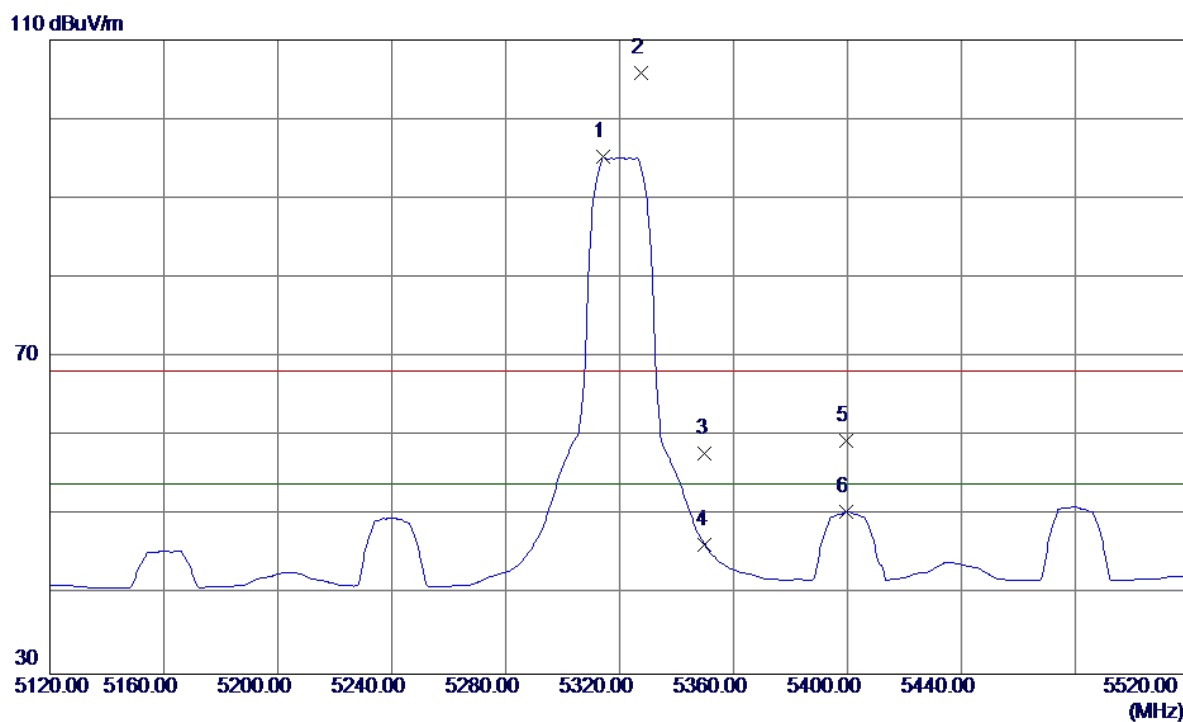


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5314.4000	54.65	40.57	95.22	54.00	41.22	AVG	No Limit
2	5327.6000	65.30	40.59	105.89	68.30	37.59	Peak	No Limit
3	5350.0000	17.16	40.64	57.80	68.30	-10.50	Peak	
4	5350.0000	5.64	40.64	46.28	54.00	-7.72	AVG	
5	5399.6000	18.69	40.75	59.44	68.30	-8.86	Peak	
6	5399.6000	9.67	40.75	50.42	54.00	-3.58	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Horizontal

80 dBuV/m

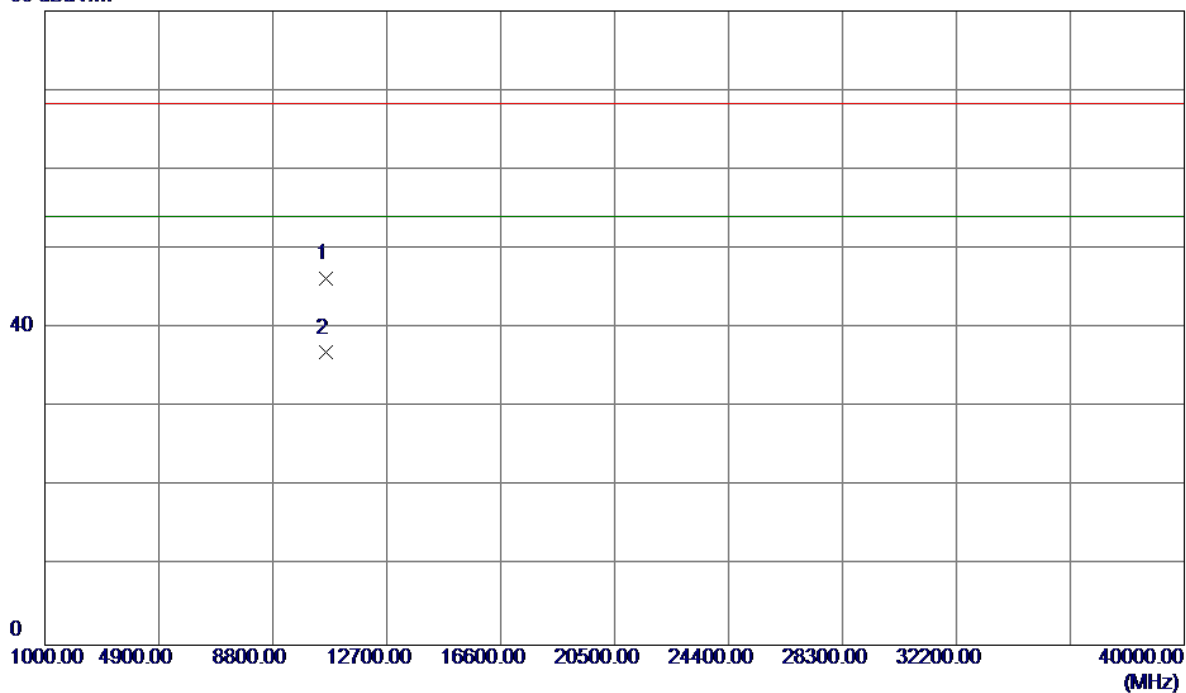


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10640.1140	32.02	14.25	46.27	68.30	-22.03	Peak	
2	10640.5880	22.63	14.25	36.88	54.00	-17.12	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical

115 dBuV/m

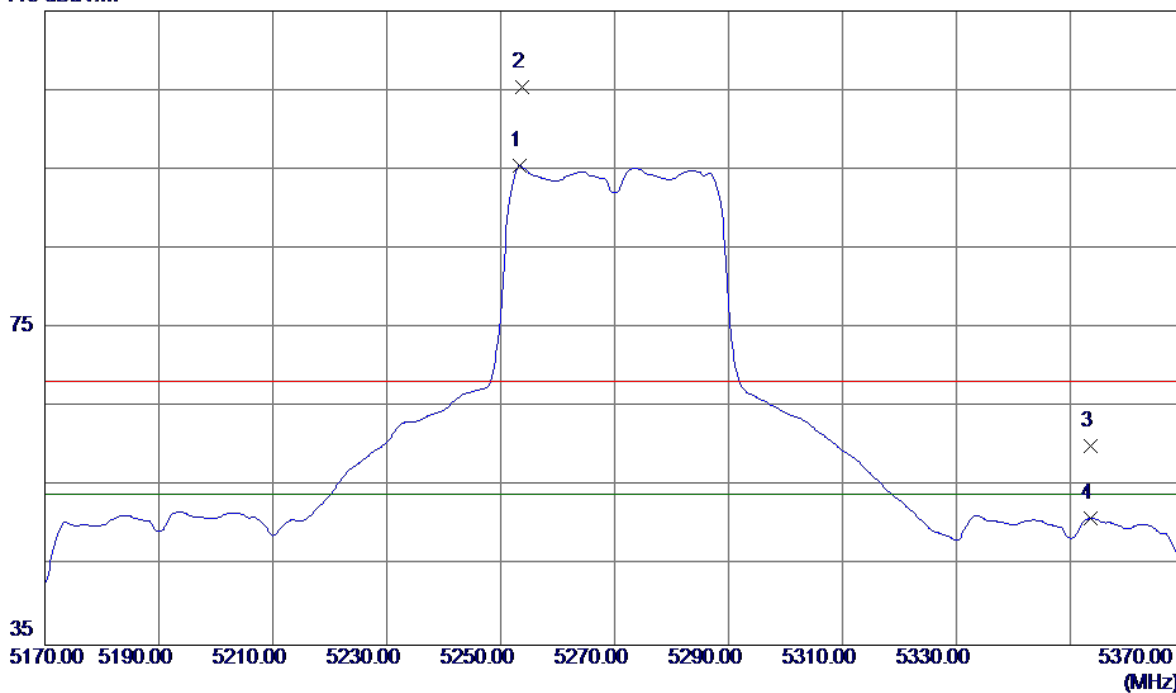


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5253.4000	55.07	40.44	95.51	54.00	41.51	AVG	No Limit
2	5253.8000	64.93	40.44	105.37	68.30	37.07	Peak	No Limit
3	5353.6000	19.40	40.65	60.05	68.30	-8.25	Peak	
4	5353.6000	10.34	40.65	50.99	54.00	-3.01	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical

80 dBuV/m

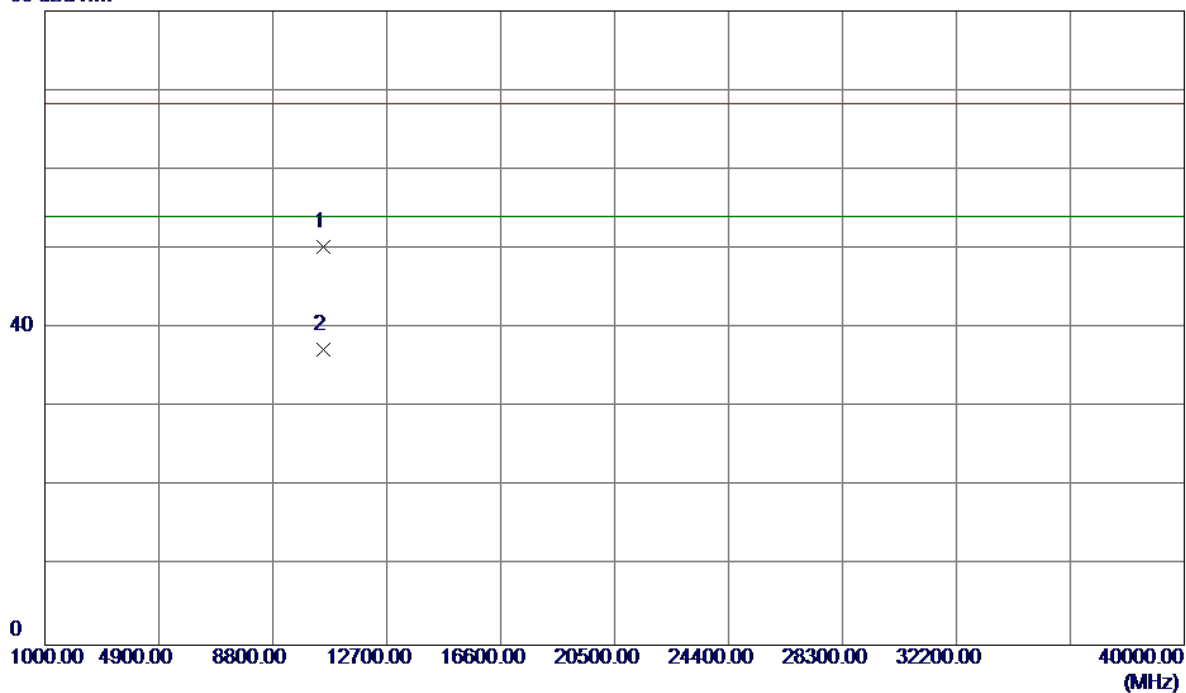


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	10540.2570	36.46	13.83	50.29	68.30	-18.01	Peak	
2	10540.6550	23.47	13.83	37.30	54.00	-16.70	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

115 dBuV/m

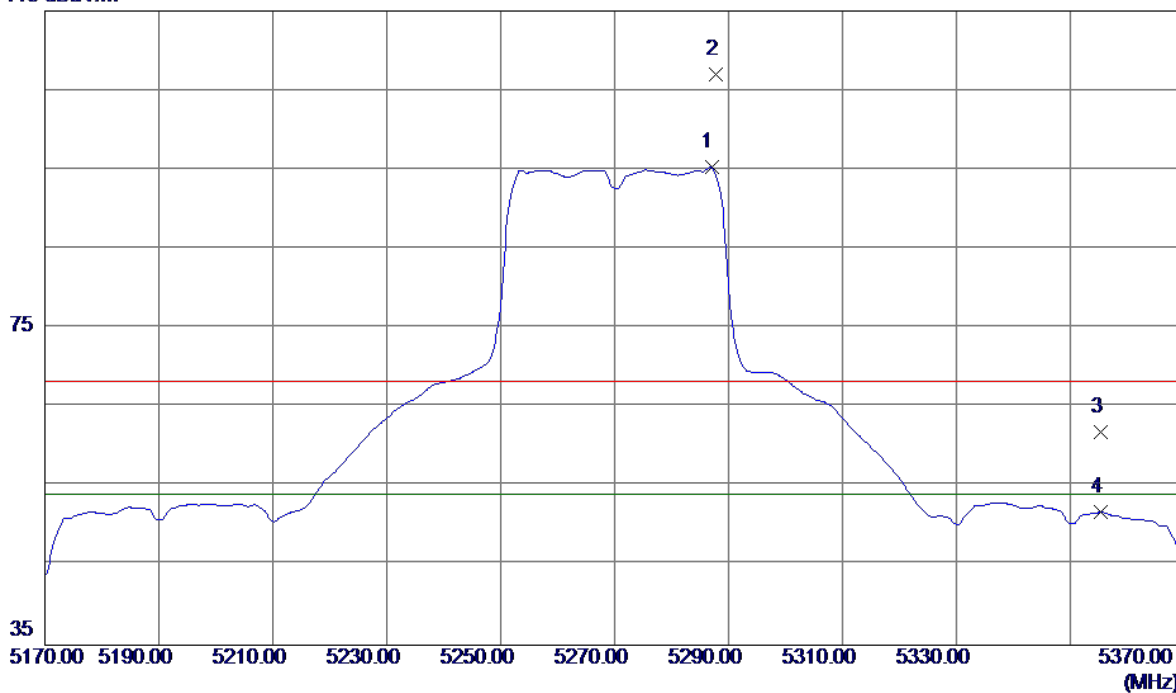


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5287.0000	54.86	40.51	95.37	54.00	41.37	AVG	No Limit
2	5287.8000	66.42	40.51	106.93	68.30	38.63	Peak	No Limit
3	5355.4000	21.20	40.65	61.85	68.30	-6.45	Peak	
4	5355.4000	11.12	40.65	51.77	54.00	-2.23	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

80 dBuV/m

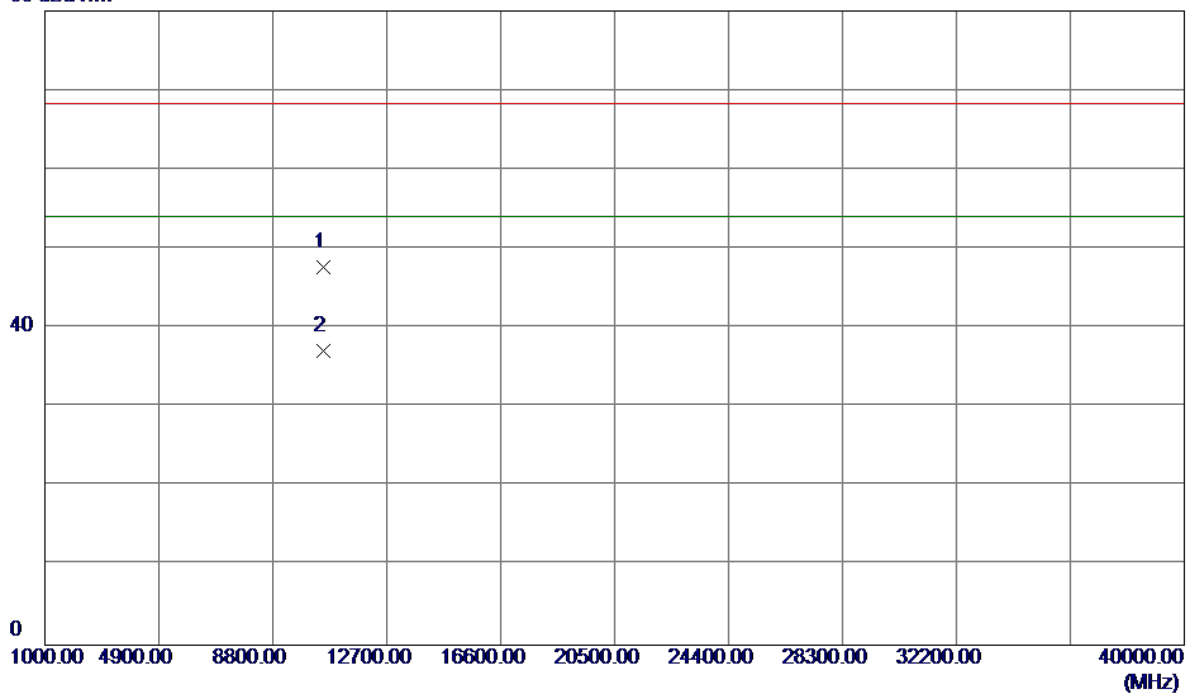


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10540.8700	33.85	13.84	47.69	68.30	-20.61	Peak	
2	10540.8700	23.28	13.84	37.12	54.00	-16.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

115 dBuV/m

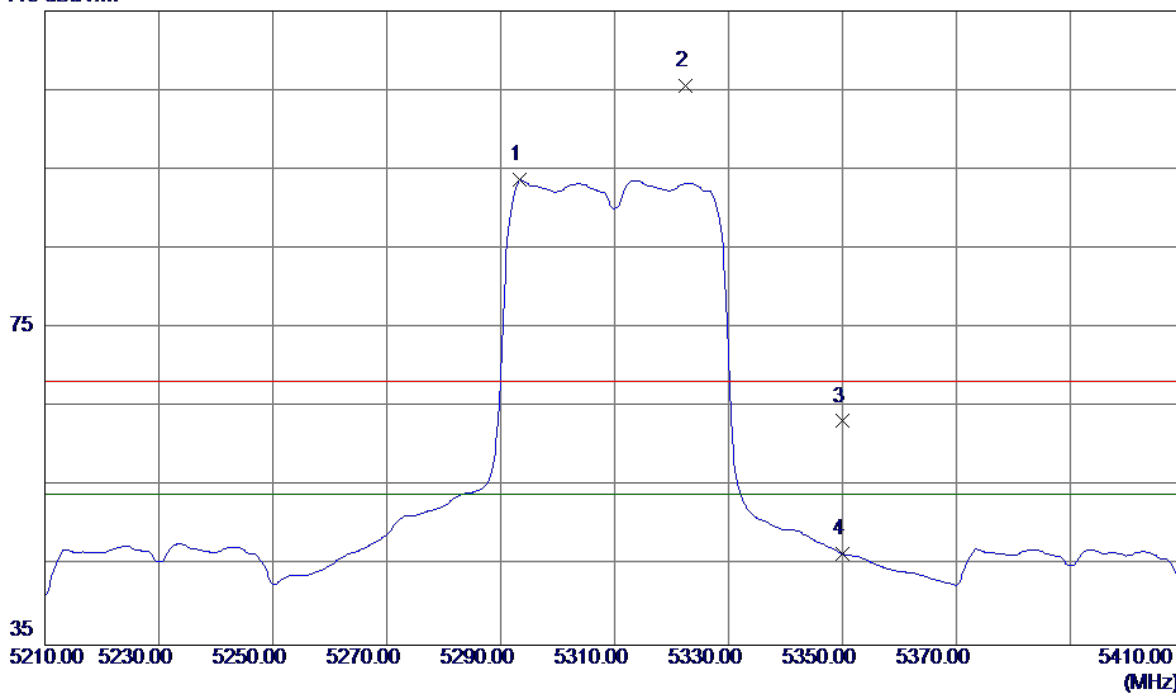


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5293.4000	53.16	40.52	93.68	54.00	39.68	AVG	No Limit
2	5322.4000	64.97	40.58	105.55	68.30	37.25	Peak	No Limit
3	5350.0000	22.60	40.64	63.24	68.30	-5.06	Peak	
4	5350.0000	5.85	40.64	46.49	54.00	-7.51	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

80 dBuV/m

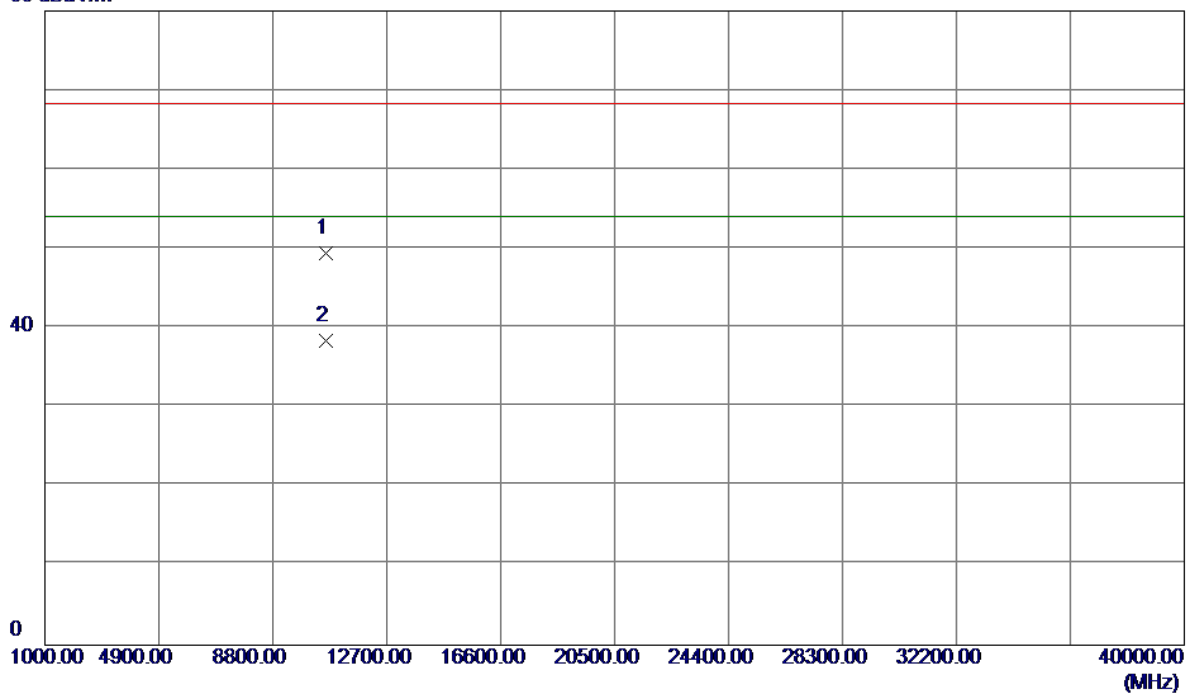


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.2500	35.21	14.17	49.38	68.30	-18.92	Peak	
2	10620.2500	24.30	14.17	38.47	54.00	-15.53	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

115 dBuV/m

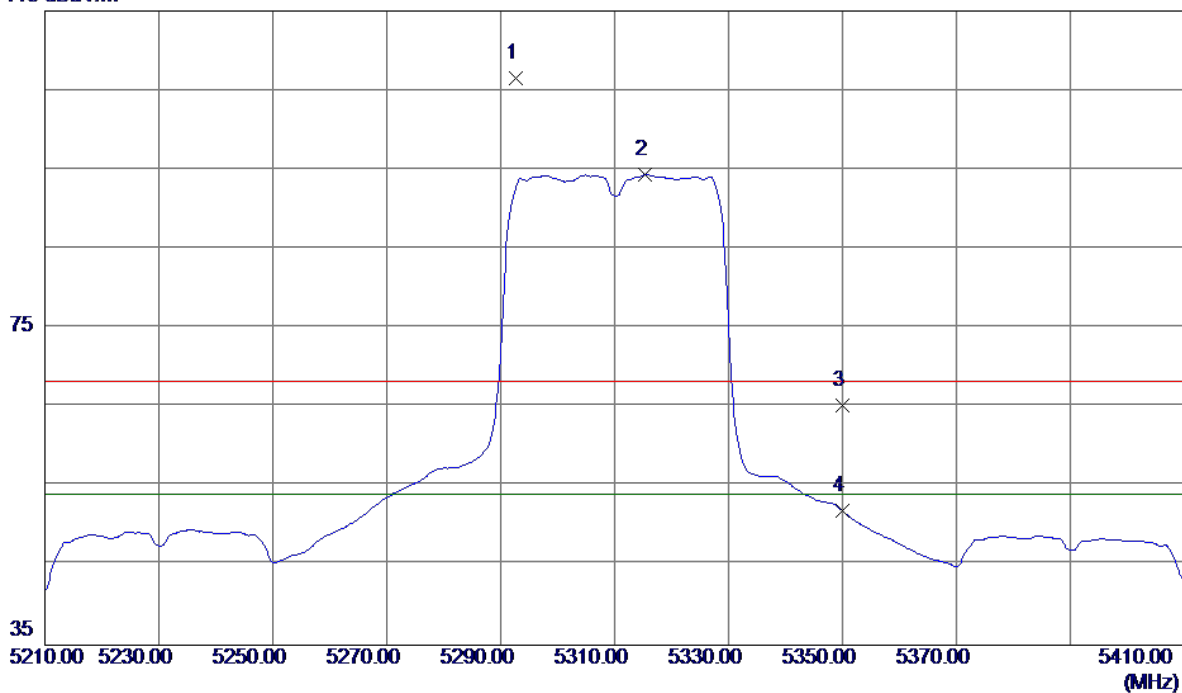


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5292.6000	65.96	40.52	106.48	68.30	38.18	Peak	No Limit
2	5315.4000	53.76	40.57	94.33	54.00	40.33	AVG	No Limit
3	5350.0000	24.55	40.64	65.19	68.30	-3.11	Peak	
4	5350.0000	11.28	40.64	51.92	54.00	-2.08	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

80 dBuV/m

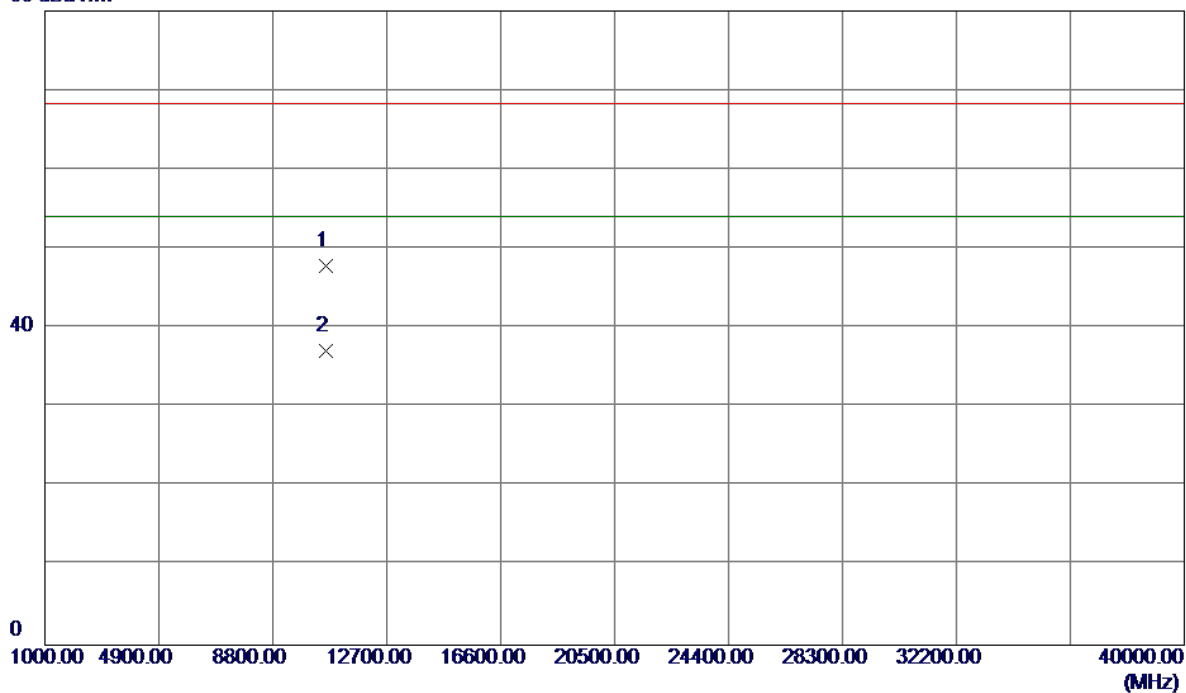


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10620.3700	33.69	14.17	47.86	68.30	-20.44	Peak	
2	10620.3700	22.99	14.17	37.16	54.00	-16.84	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical

115 dBuV/m

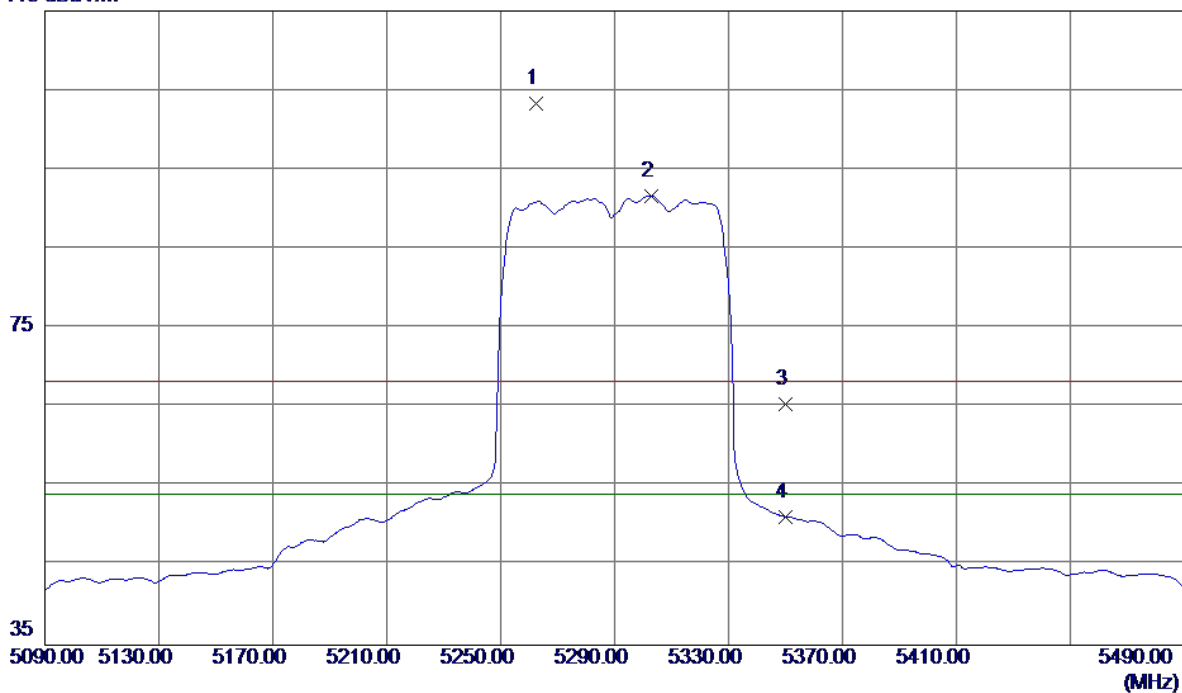


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5262.4000	62.86	40.46	103.32	68.30	35.02	Peak	No Limit
2	5302.8000	51.15	40.54	91.69	54.00	37.69	AVG	No Limit
3	5350.0000	24.83	40.64	65.47	68.30	-2.83	Peak	
4	5350.0000	10.58	40.64	51.22	54.00	-2.78	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical

80 dBuV/m

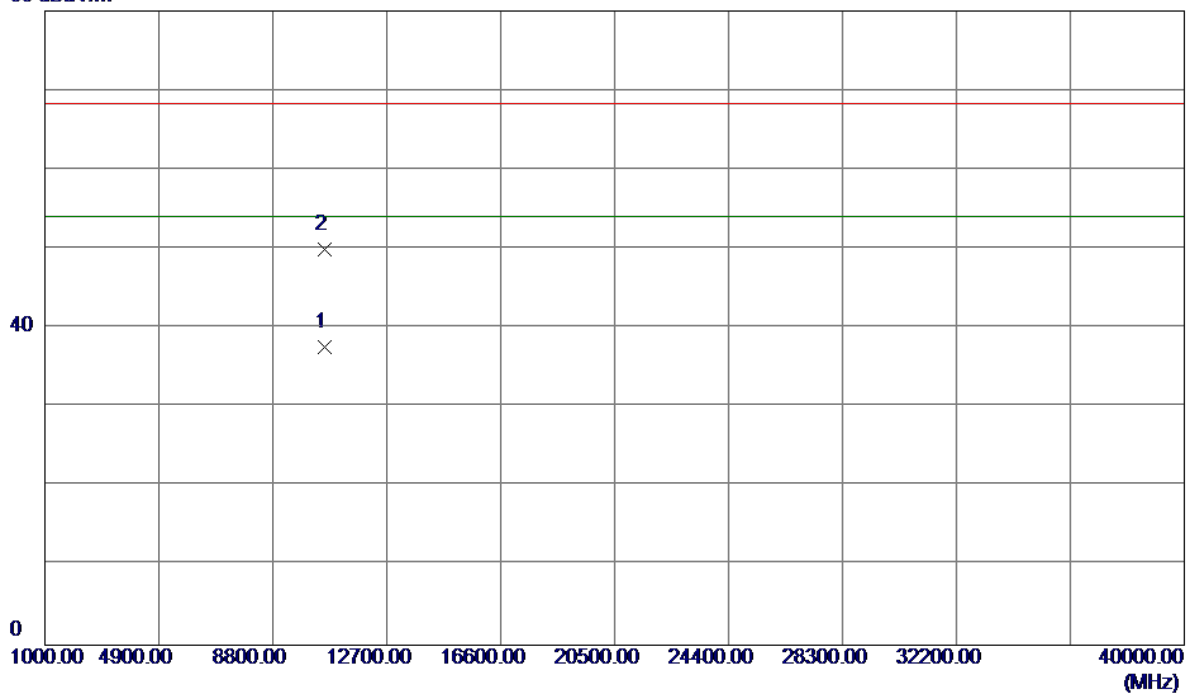


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10581.3400	23.58	14.00	37.58	54.00	-16.42	AVG	
2	10581.3900	35.86	14.00	49.86	68.30	-18.44	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

115 dBuV/m

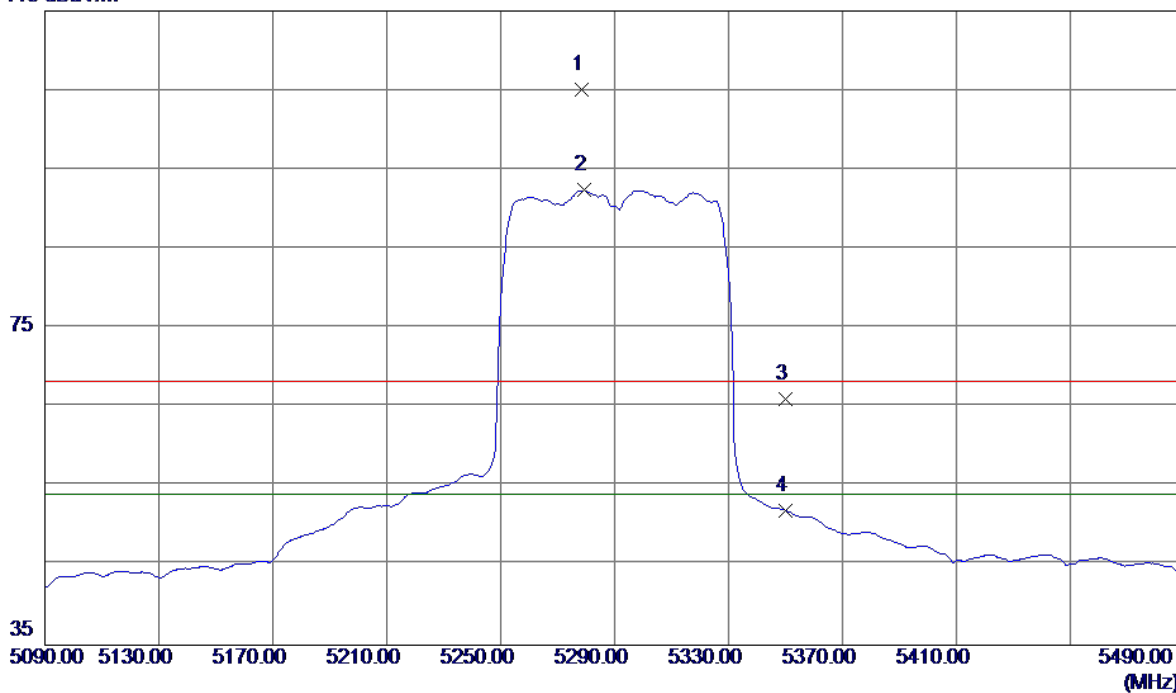


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5278.4000	64.62	40.49	105.11	68.30	36.81	Peak	No Limit
2	5279.2000	51.88	40.49	92.37	54.00	38.37	AVG	No Limit
3	5350.0000	25.45	40.64	66.09	68.30	-2.21	Peak	
4	5350.0000	11.35	40.64	51.99	54.00	-2.01	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

80 dBuV/m

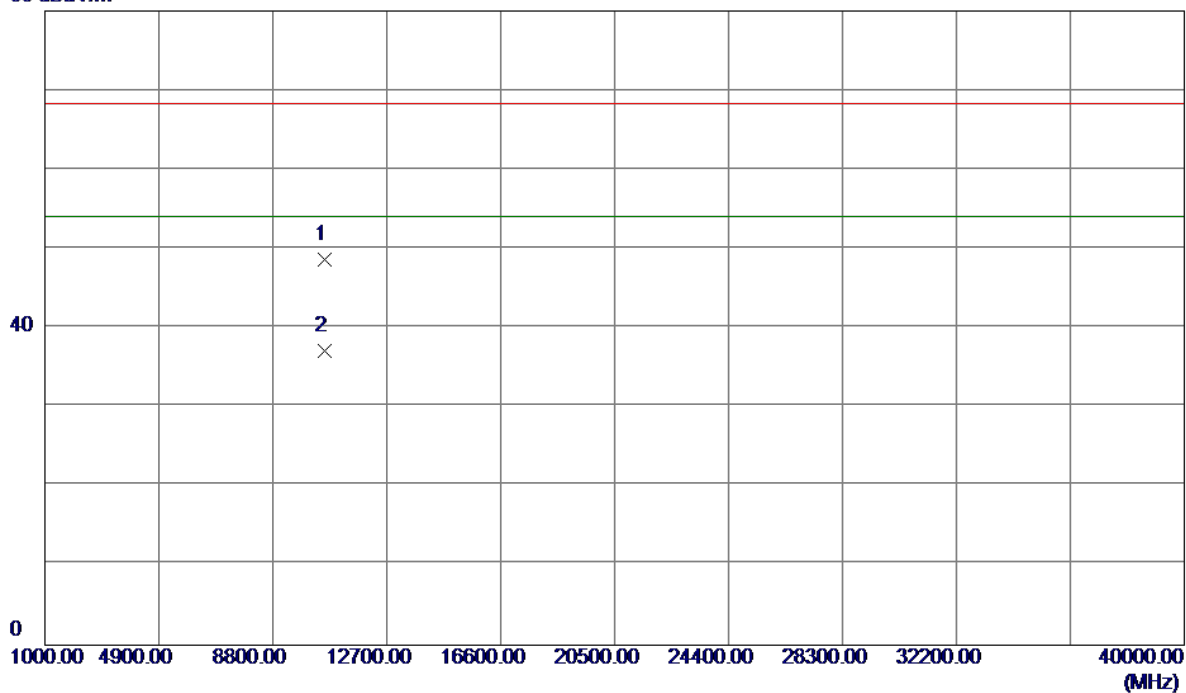


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10580.9900	34.57	14.00	48.57	68.30	-19.73	Peak	
2	10580.9900	23.14	14.00	37.14	54.00	-16.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical

115 dBuV/m

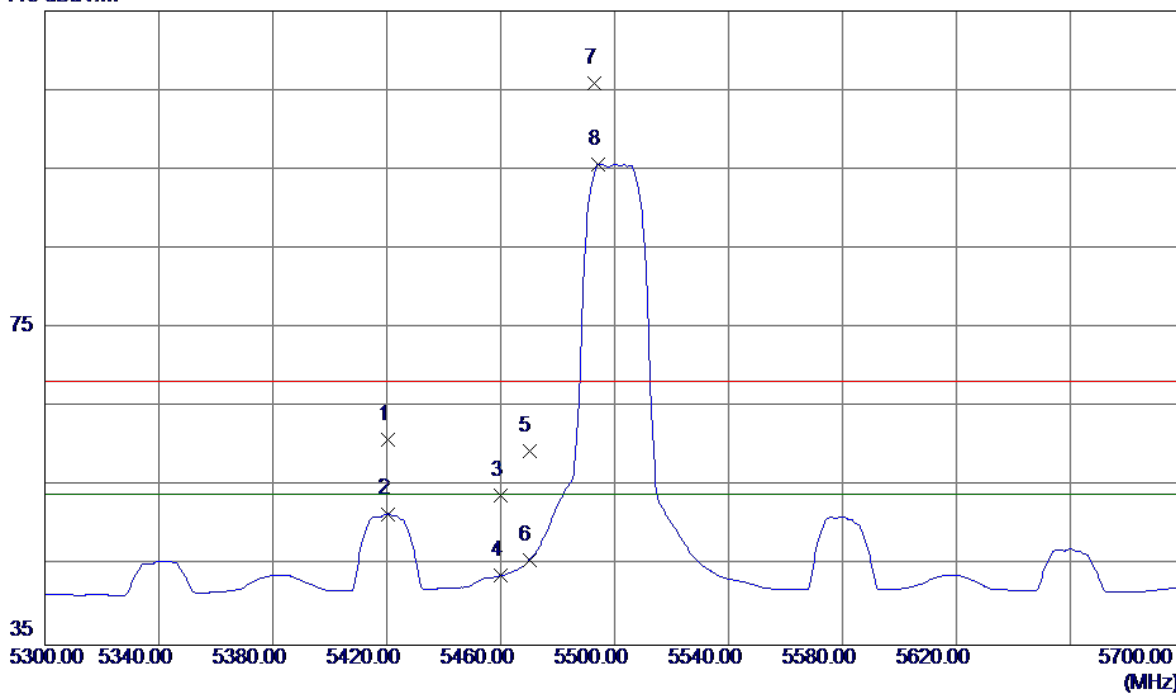


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5420.4000	20.16	40.79	60.95	68.30	-7.35	Peak	
2	5420.4000	10.77	40.79	51.56	54.00	-2.44	AVG	
3	5460.0000	12.99	40.88	53.87	68.30	-14.43	Peak	
4	5460.0000	2.88	40.88	43.76	54.00	-10.24	AVG	
5	5470.0000	18.51	40.90	59.41	68.30	-8.89	Peak	
6	5470.0000	4.78	40.90	45.68	54.00	-8.32	AVG	
7	5492.8000	64.88	40.94	105.82	68.30	37.52	Peak	No Limit
8	5494.4000	54.72	40.95	95.67	54.00	41.67	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical

80 dBuV/m

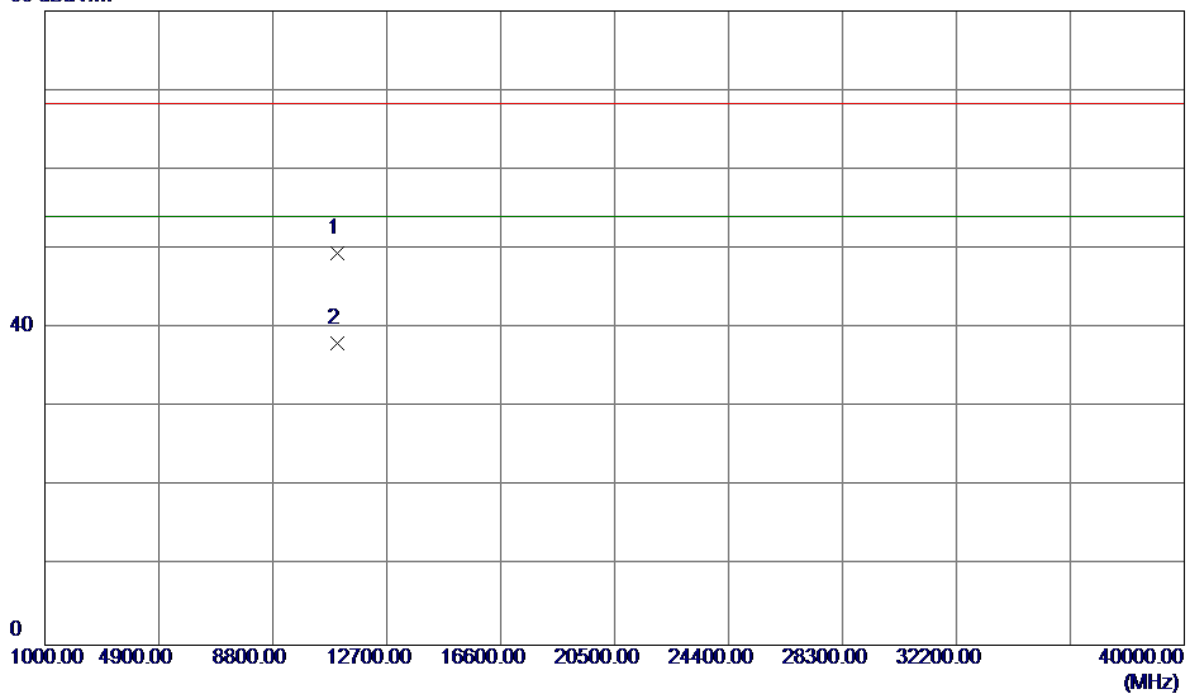


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.6700	33.65	15.75	49.40	68.30	-18.90	Peak	
2	11000.6200	22.36	15.75	38.11	54.00	-15.89	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal

112 dBuV/m

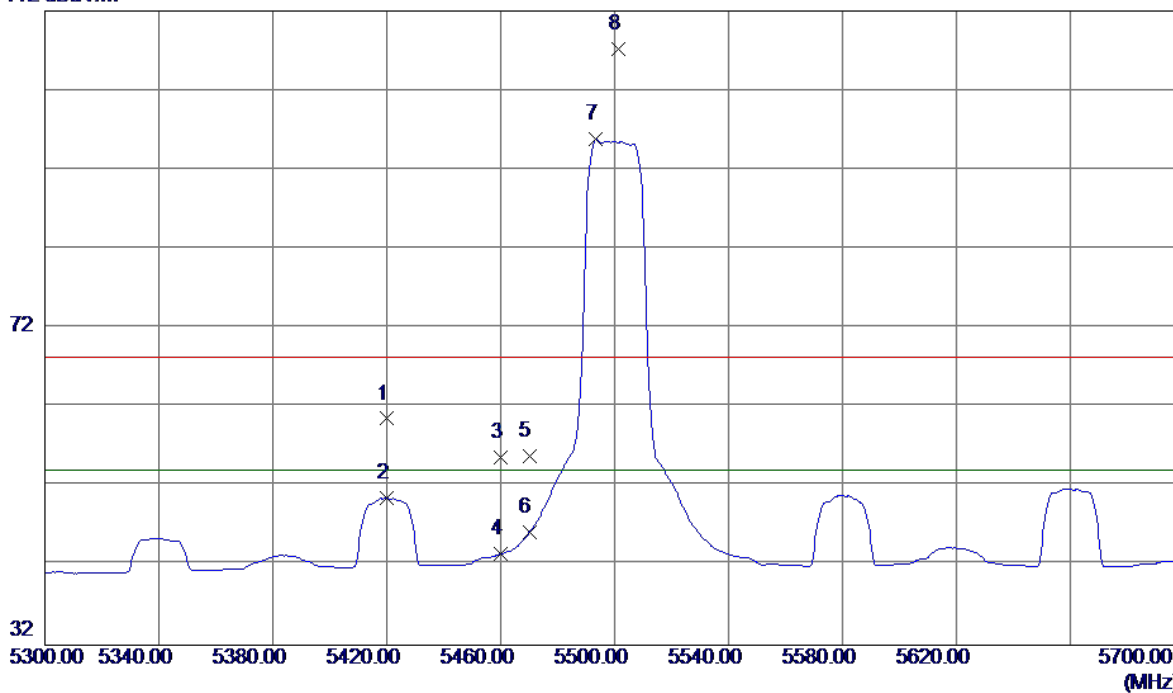


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5420.0000	19.77	40.79	60.56	68.30	-7.74	Peak	
2	5420.0000	9.82	40.79	50.61	54.00	-3.39	AVG	
3	5460.0000	14.79	40.88	55.67	68.30	-12.63	Peak	
4	5460.0000	2.65	40.88	43.53	54.00	-10.47	AVG	
5	5470.0000	14.95	40.90	55.85	68.30	-12.45	Peak	
6	5470.0000	5.27	40.90	46.17	54.00	-7.83	AVG	
7	5493.2000	54.91	40.95	95.86	54.00	41.86	AVG	No Limit
8	5501.2000	66.17	40.96	107.13	68.30	38.83	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal

80 dBuV/m

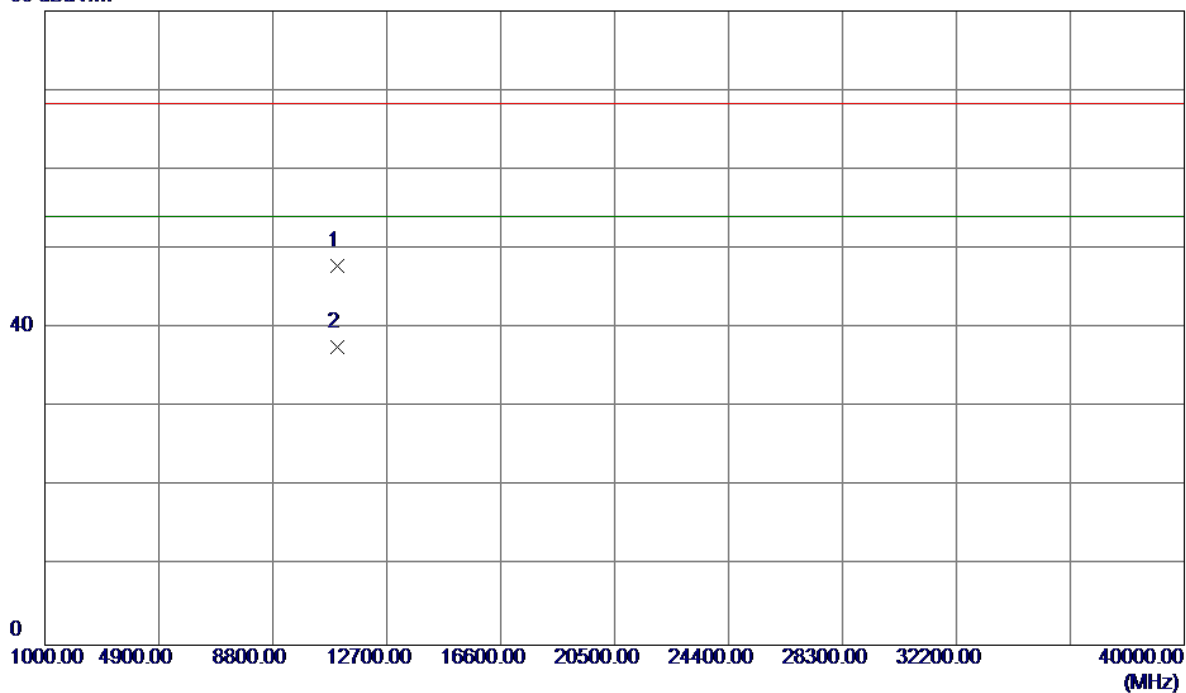


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0800	32.07	15.75	47.82	68.30	-20.48	Peak	
2	11000.0800	21.90	15.75	37.65	54.00	-16.35	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Vertical

115 dBuV/m

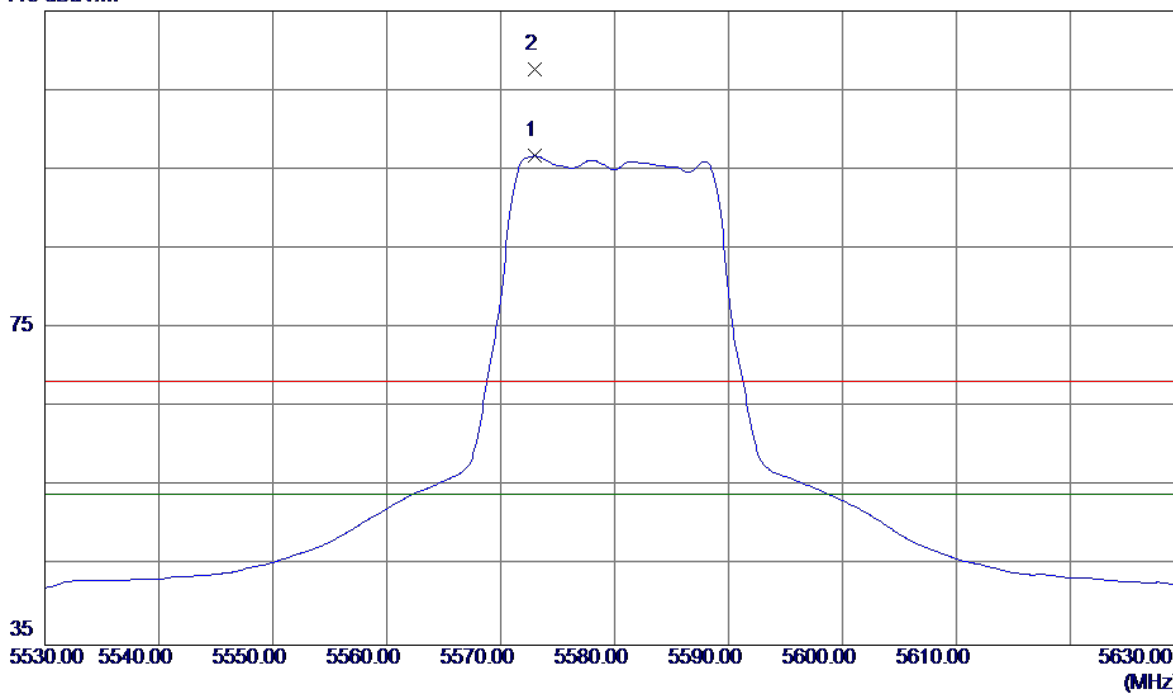


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5573.0000	55.62	41.06	96.68	54.00	42.68	AVG	No Limit
2	5573.0000	66.54	41.06	107.60	68.30	39.30	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Vertical


80 dBuV/m

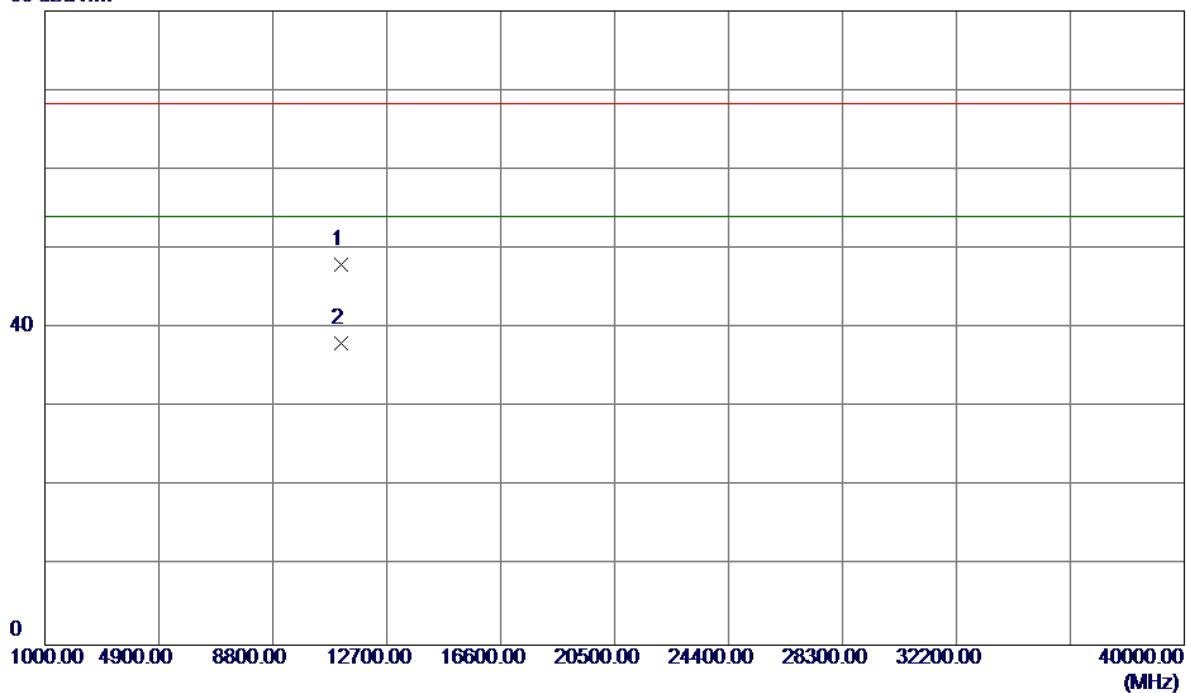

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11160.7100	31.89	16.13	48.02	68.30	-20.28	Peak	
2	11160.7100	21.88	16.13	38.01	54.00	-15.99	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal

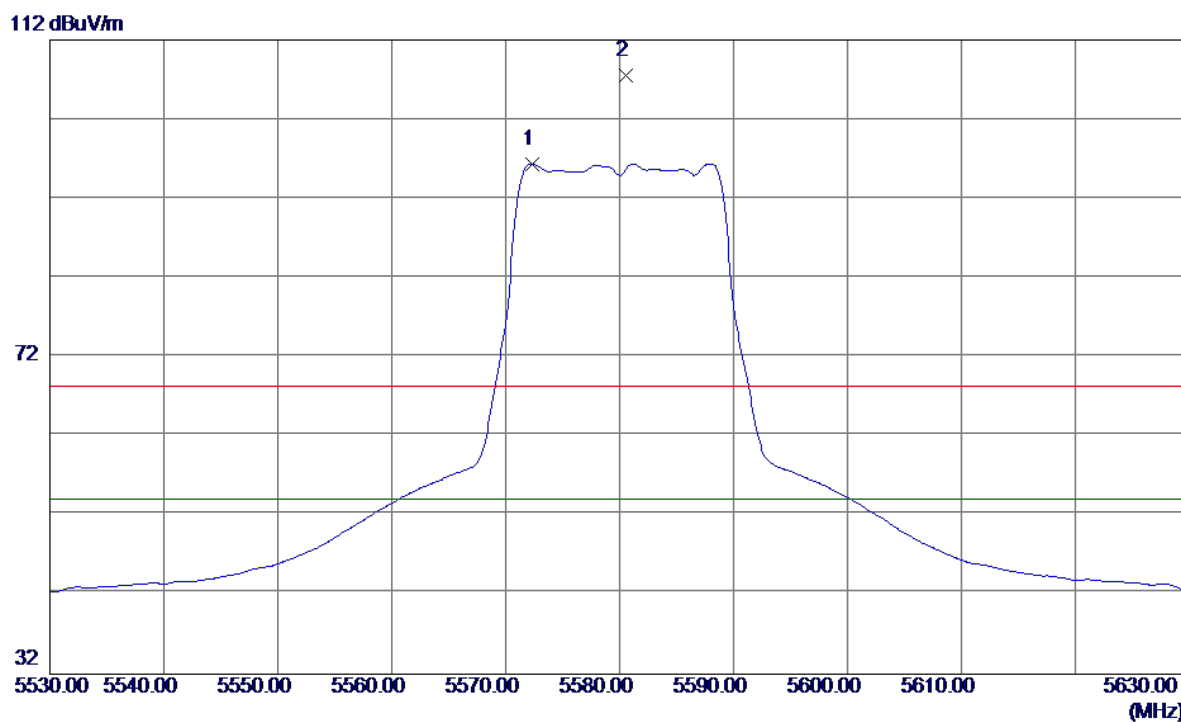


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5572.3000	55.32	41.06	96.38	54.00	42.38	AVG	No Limit
2	5580.6000	66.40	41.07	107.47	68.30	39.17	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal

80 dBuV/m

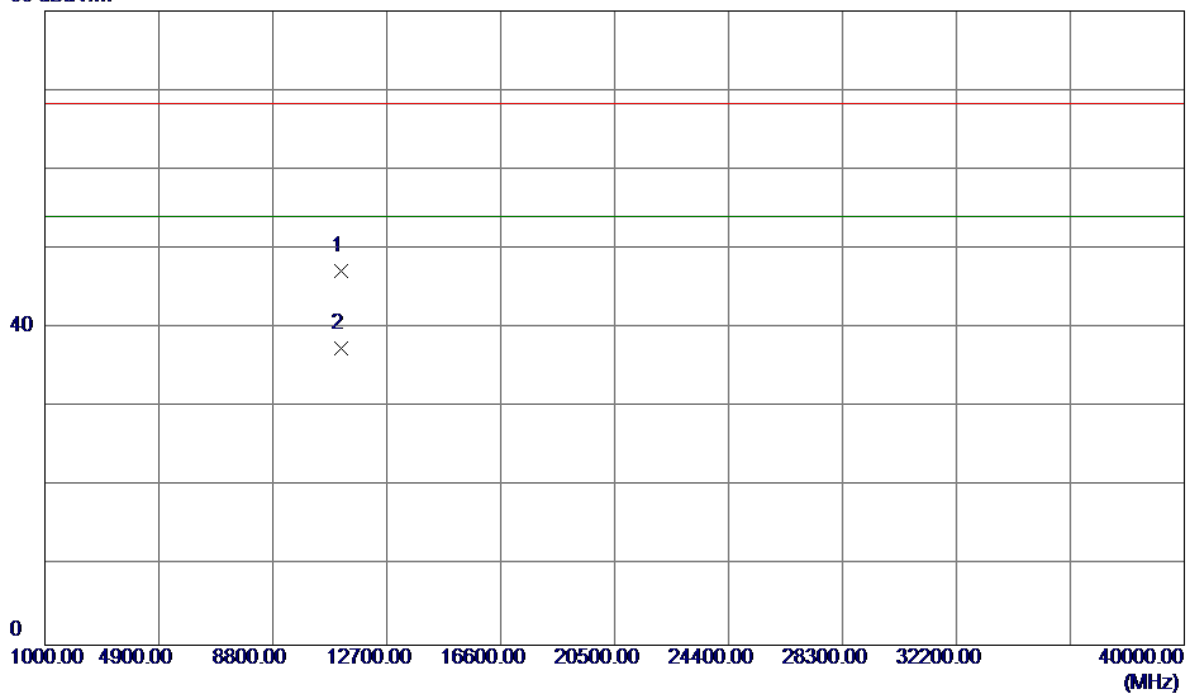


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11160.0300	31.10	16.13	47.23	68.30	-21.07	Peak	
2	11160.0300	21.29	16.13	37.42	54.00	-16.58	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical

115 dBuV/m

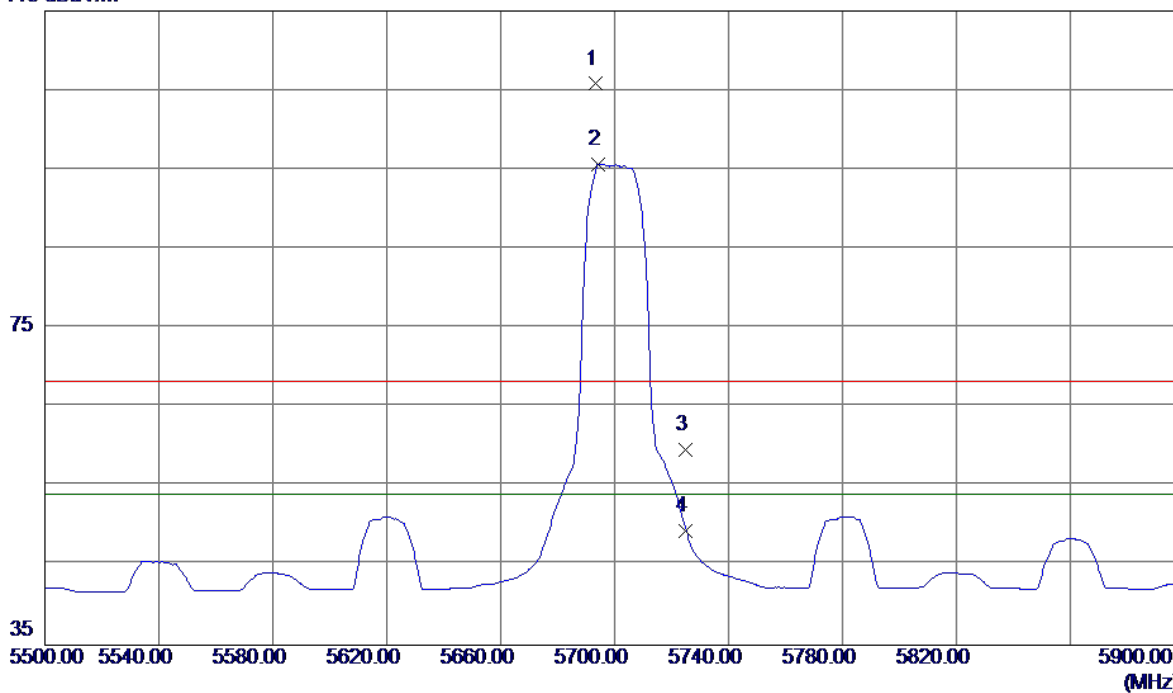


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5693.2000	64.58	41.22	105.80	68.30	37.50	Peak	No Limit
2	5694.4000	54.48	41.22	95.70	54.00	41.70	AVG	No Limit
3	5725.0000	18.41	41.27	59.68	68.30	-8.62	Peak	
4	5725.0000	8.13	41.27	49.40	54.00	-4.60	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical


80 dBuV/m

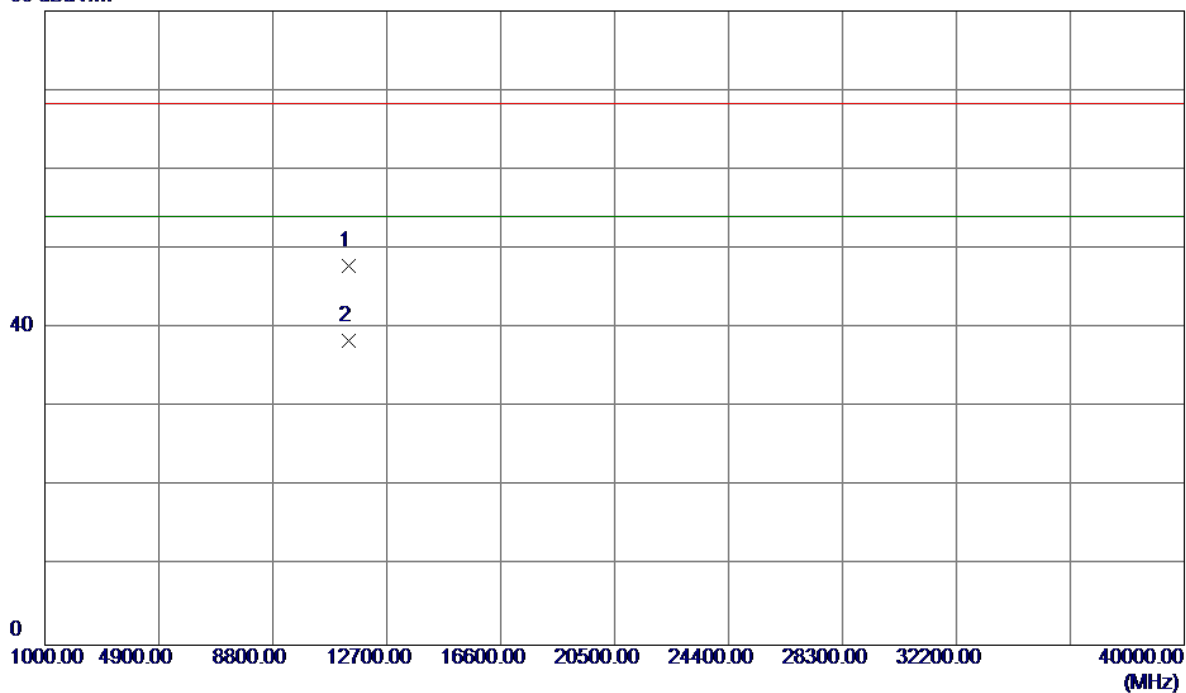

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.7900	31.21	16.70	47.91	68.30	-20.39	Peak	
2	11400.7900	21.63	16.70	38.33	54.00	-15.67	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

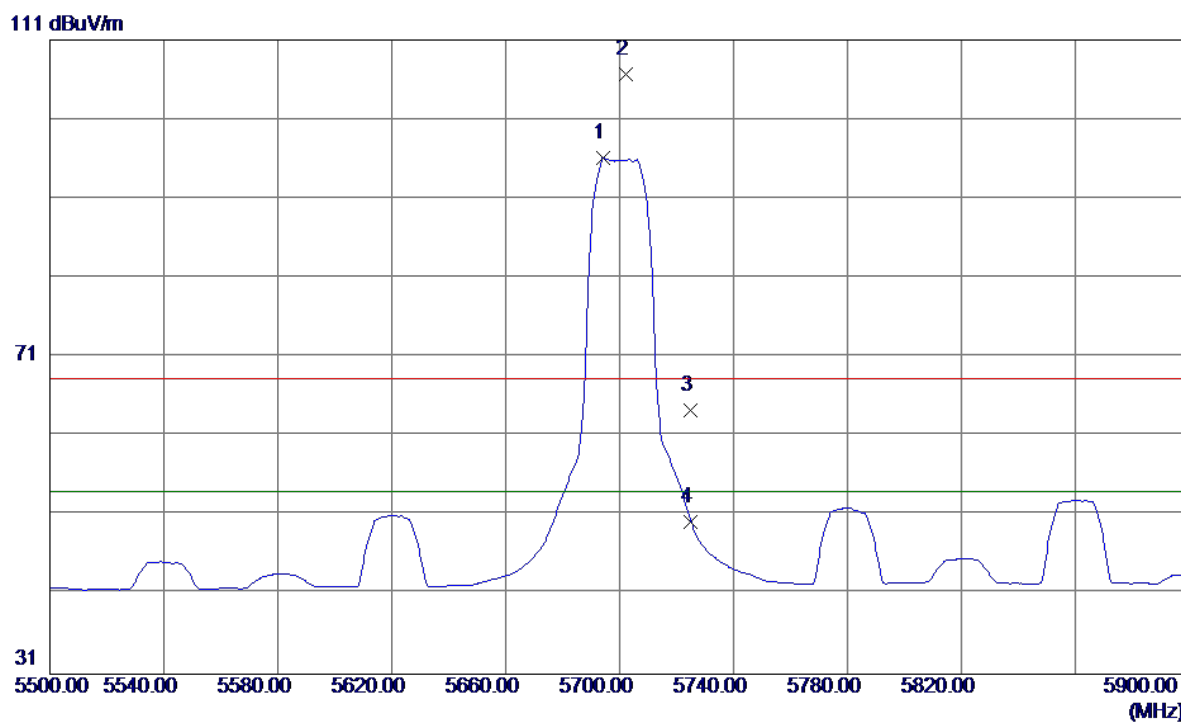


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5694.4000	54.87	41.22	96.09	54.00	42.09	AVG	No Limit
2	5702.4000	65.51	41.24	106.75	68.30	38.45	Peak	No Limit
3	5725.0000	23.05	41.27	64.32	68.30	-3.98	Peak	
4	5725.0000	8.91	41.27	50.18	54.00	-3.82	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

80 dBuV/m

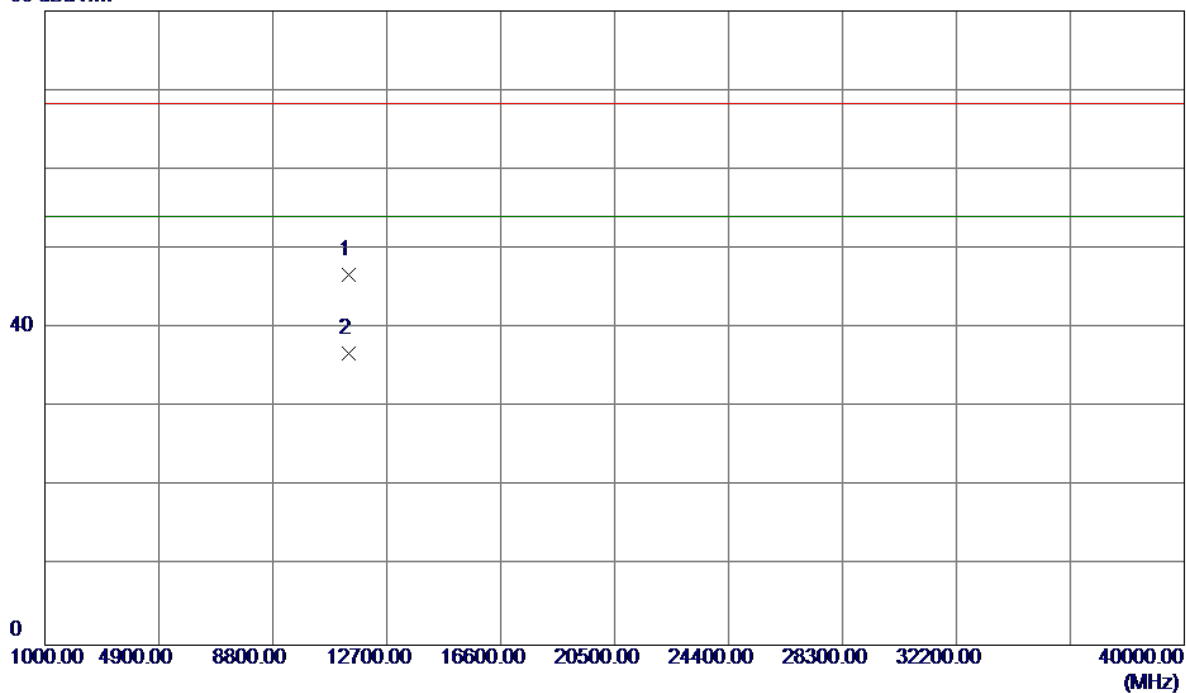


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.6300	30.07	16.70	46.77	68.30	-21.53	Peak	
2	11400.2200	20.14	16.70	36.84	54.00	-17.16	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

115 dBuV/m

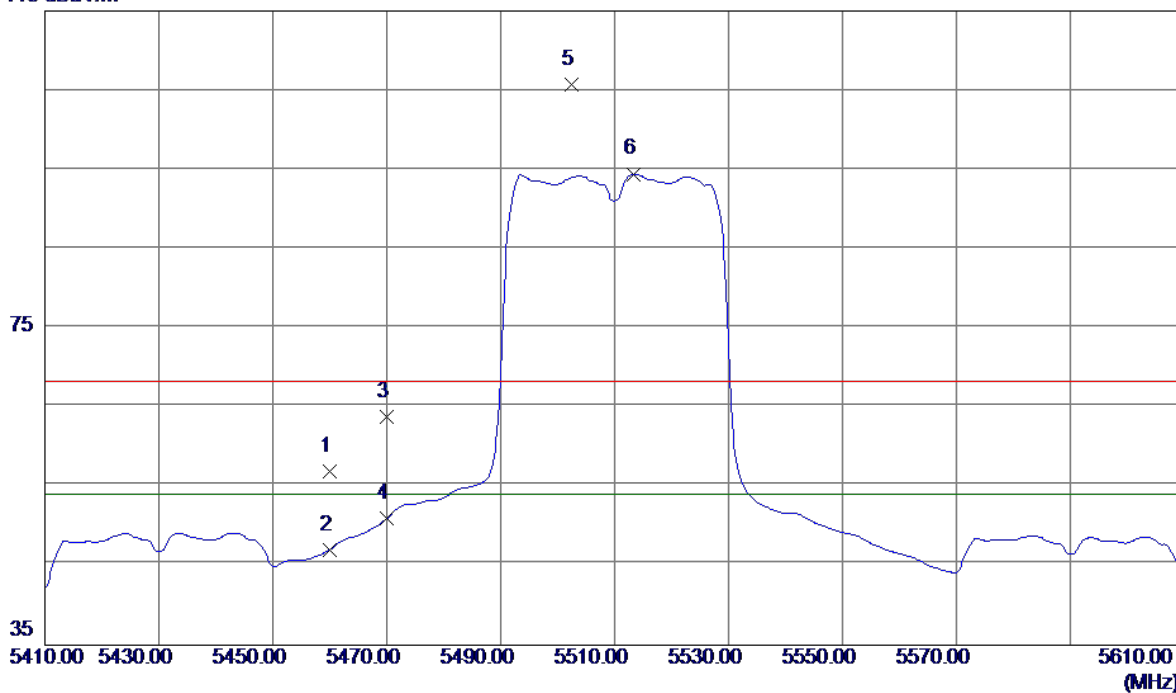


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	16.04	40.88	56.92	68.30	-11.38	Peak	
2	5460.0000	6.15	40.88	47.03	54.00	-6.97	AVG	
3	5470.0000	22.93	40.90	63.83	68.30	-4.47	Peak	
4	5470.0000	10.03	40.90	50.93	54.00	-3.07	AVG	
5	5502.4000	64.81	40.96	105.77	68.30	37.47	Peak	No Limit
6	5513.4000	53.46	40.98	94.44	54.00	40.44	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

80 dBuV/m

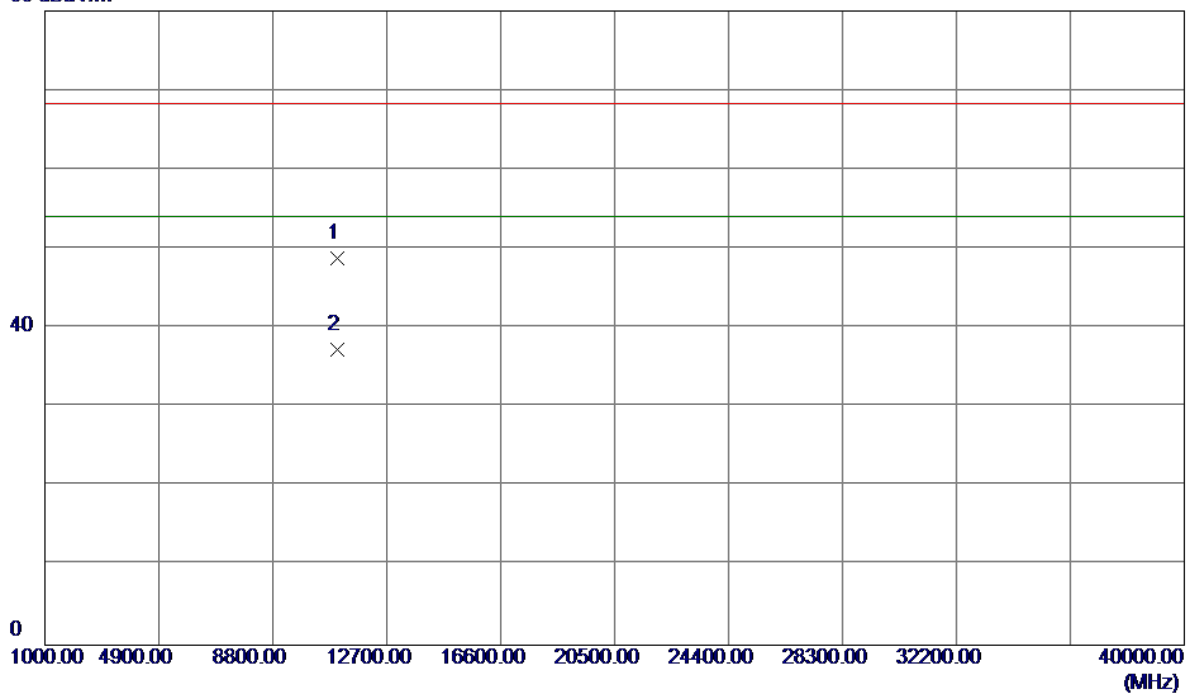


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11020.0300	32.95	15.80	48.75	68.30	-19.55	Peak	
2	11020.0300	21.54	15.80	37.34	54.00	-16.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

115 dBuV/m

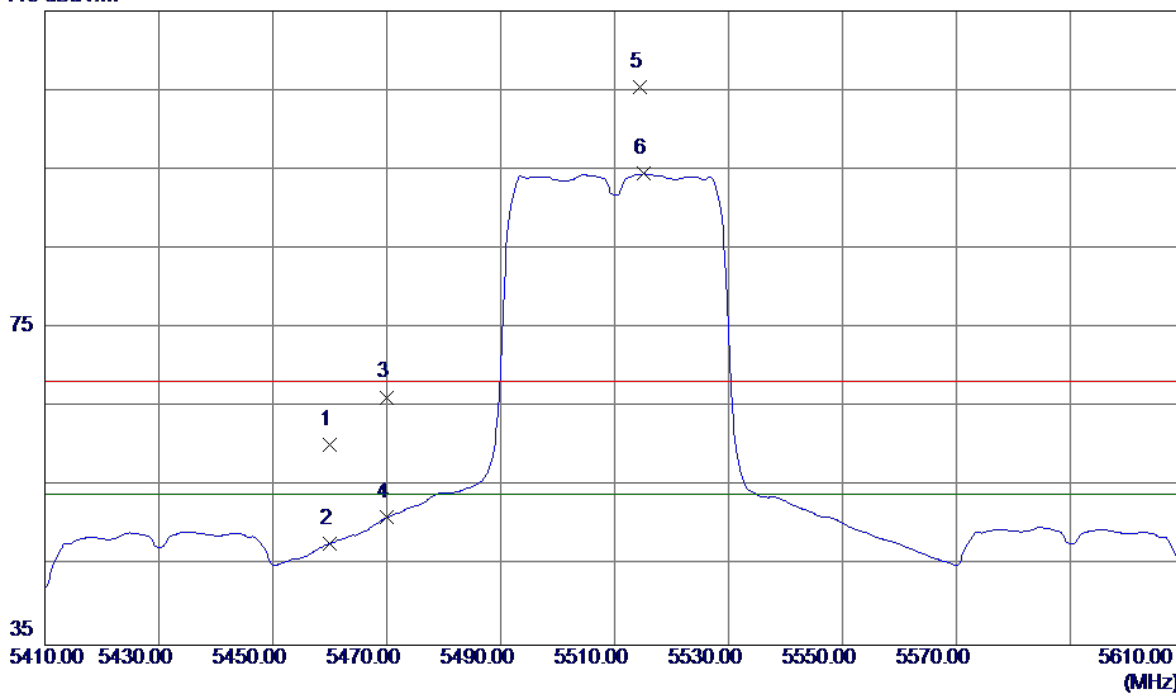


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	19.34	40.88	60.22	68.30	-8.08	Peak	
2	5460.0000	6.92	40.88	47.80	54.00	-6.20	AVG	
3	5470.0000	25.38	40.90	66.28	68.30	-2.02	Peak	
4	5470.0000	10.20	40.90	51.10	54.00	-2.90	AVG	
5	5514.4000	64.41	40.98	105.39	68.30	37.09	Peak	No Limit
6	5515.2000	53.47	40.98	94.45	54.00	40.45	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

80 dBuV/m

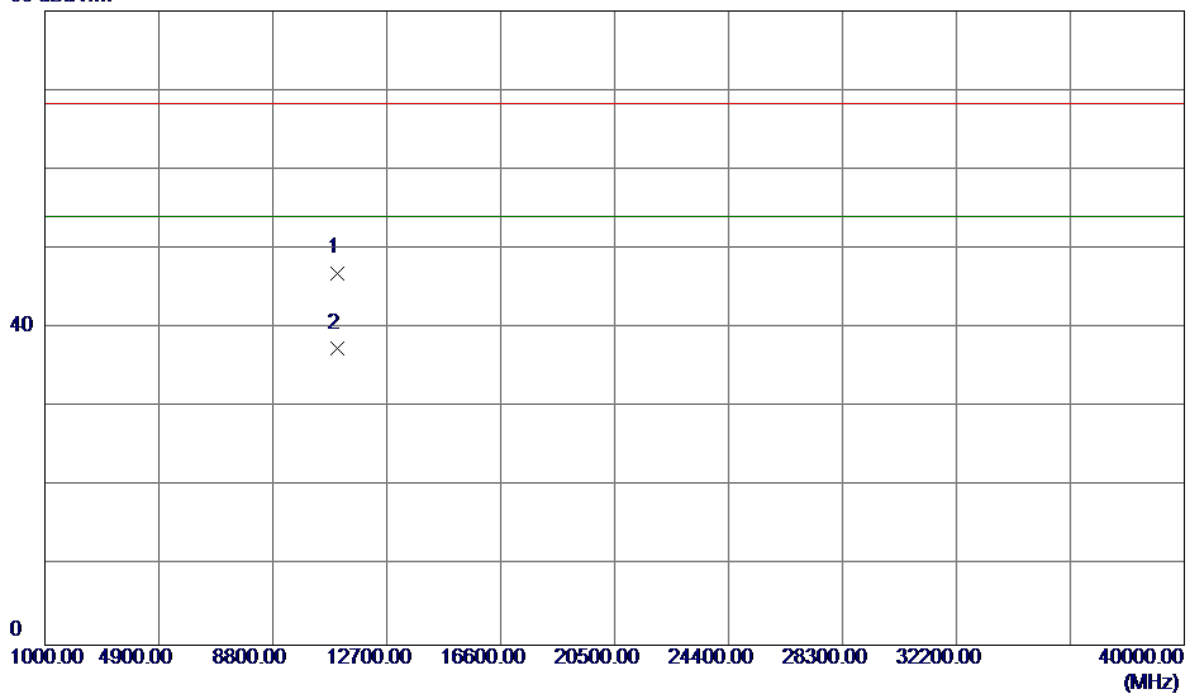


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.4560	31.16	15.80	46.96	68.30	-21.34	Peak	
2	11020.2440	21.65	15.80	37.45	54.00	-16.55	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical

115 dBuV/m

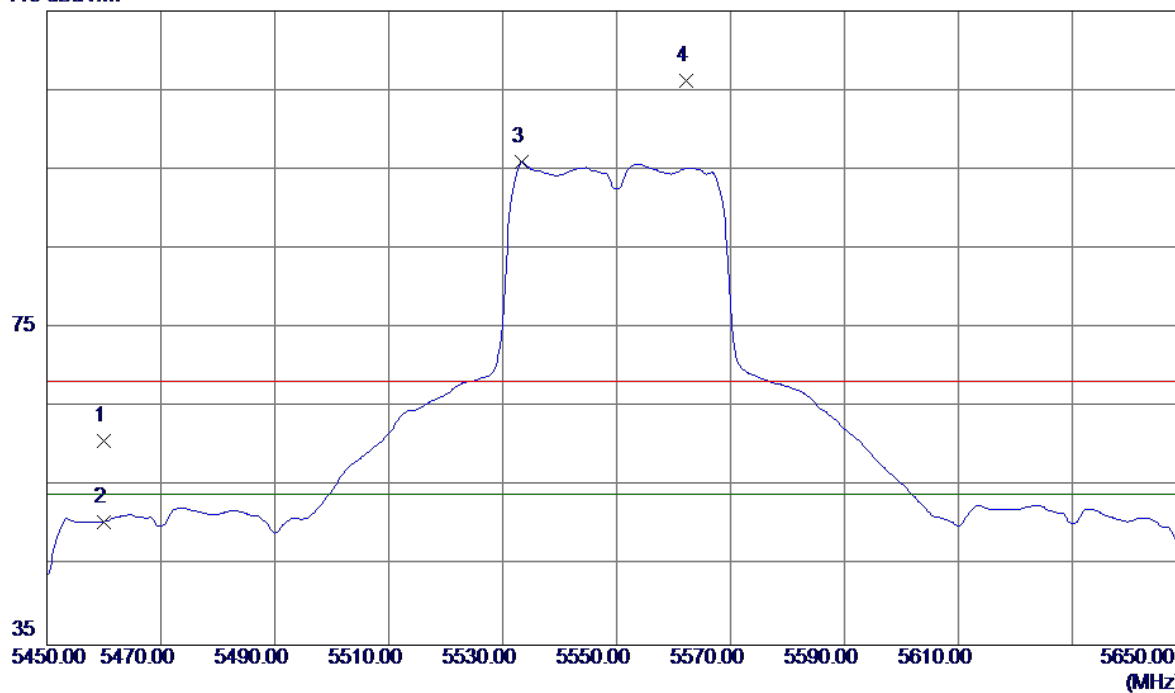


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	19.91	40.88	60.79	68.30	-7.51	Peak	
2	5460.0000	9.70	40.88	50.58	54.00	-3.42	AVG	
3	5533.4000	54.91	41.01	95.92	54.00	41.92	AVG	No Limit
4	5562.2000	65.09	41.04	106.13	68.30	37.83	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical

80 dBuV/m

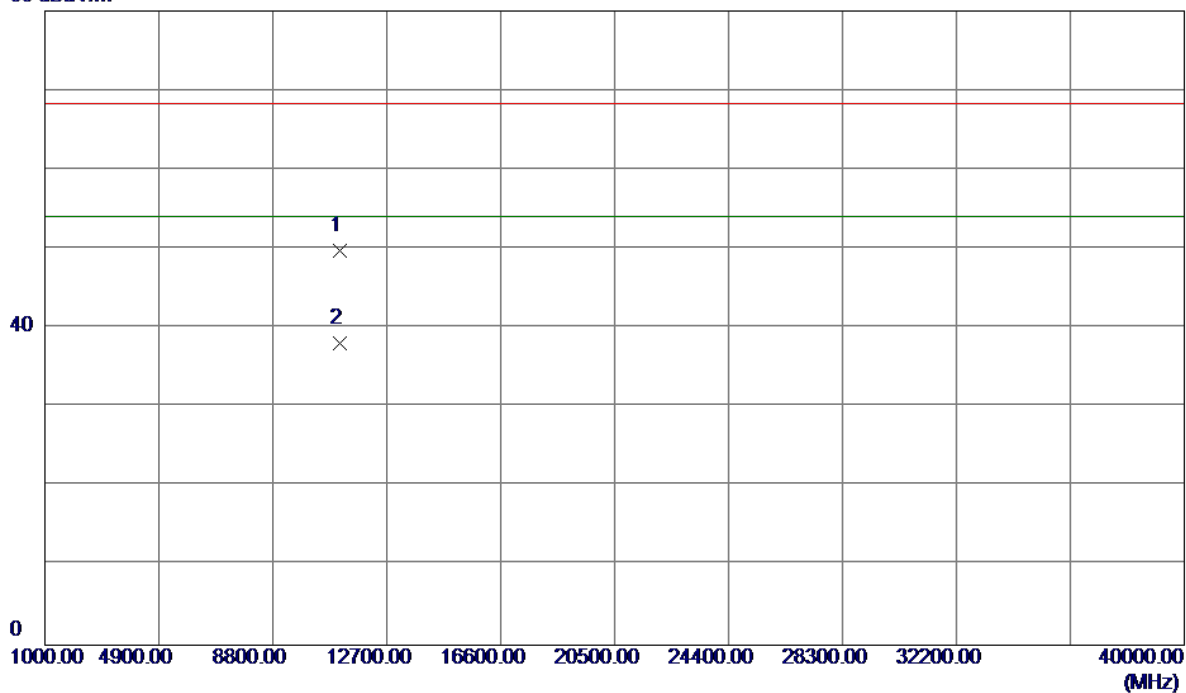


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	11100.5800	33.75	15.99	49.74	68.30	-18.56	Peak	
2	11100.5800	22.14	15.99	38.13	54.00	-15.87	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal

115 dBuV/m

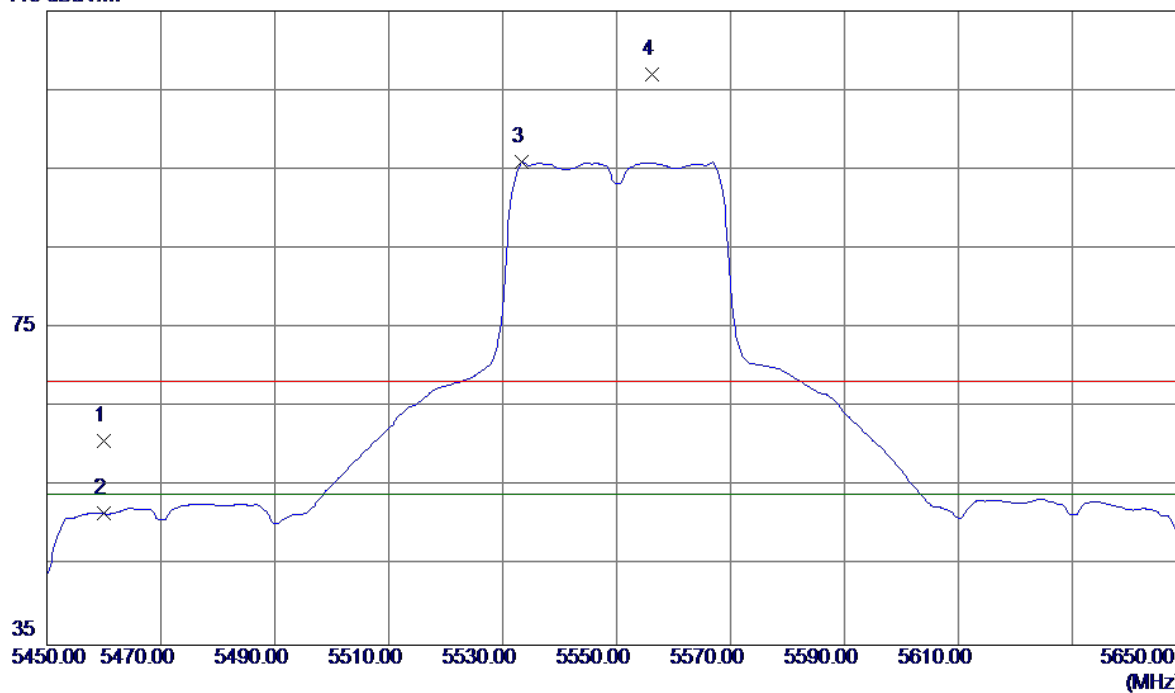


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	19.87	40.88	60.75	68.30	-7.55	Peak	
2	5460.0000	10.72	40.88	51.60	54.00	-2.40	AVG	
3	5533.4000	54.89	41.01	95.90	54.00	41.90	AVG	No Limit
4	5556.2000	65.94	41.04	106.98	68.30	38.68	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal

80 dBuV/m

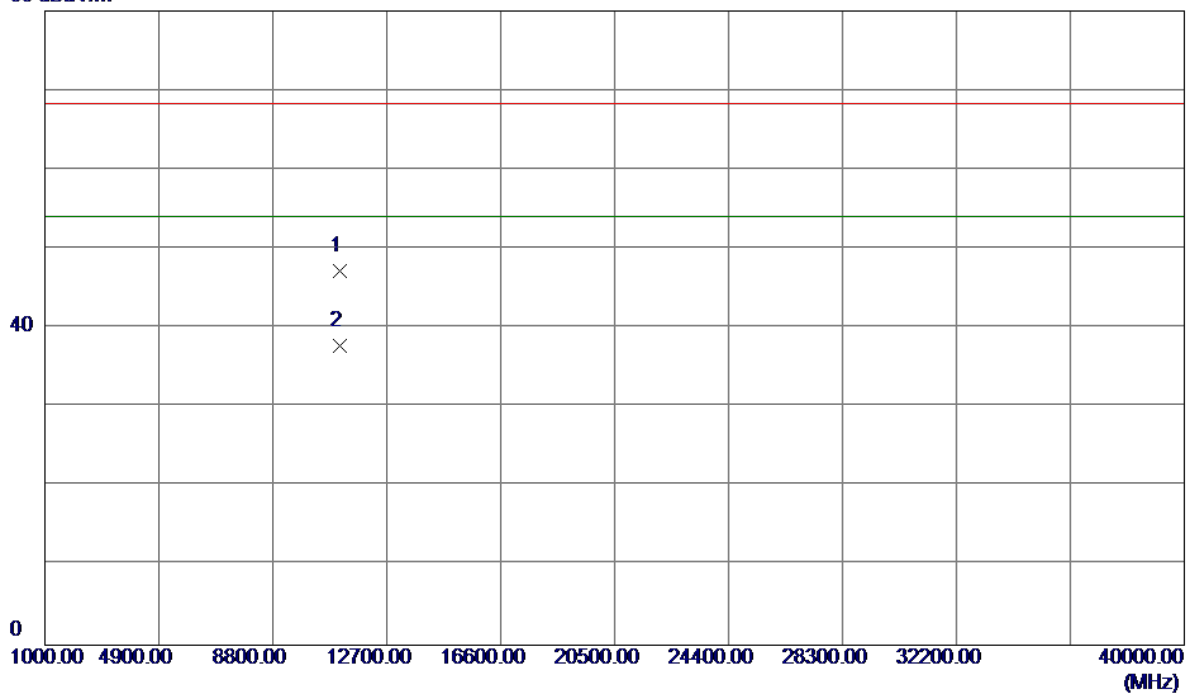


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11100.7870	31.14	15.99	47.13	68.30	-21.17	Peak	
2	11100.1460	21.75	15.99	37.74	54.00	-16.26	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

115 dBuV/m

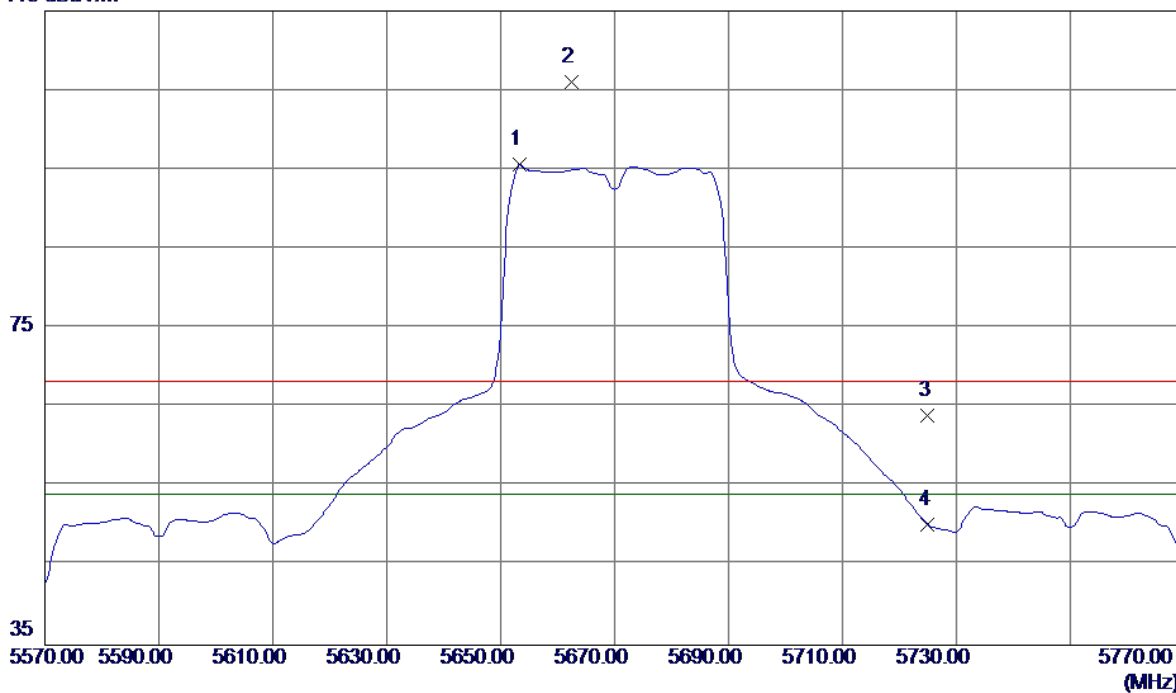


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5653.4000	54.46	41.17	95.63	54.00	41.63	AVG	No Limit
2	5662.4000	64.91	41.18	106.09	68.30	37.79	Peak	No Limit
3	5725.0000	22.65	41.27	63.92	68.30	-4.38	Peak	
4	5725.0000	8.94	41.27	50.21	54.00	-3.79	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

80 dBuV/m

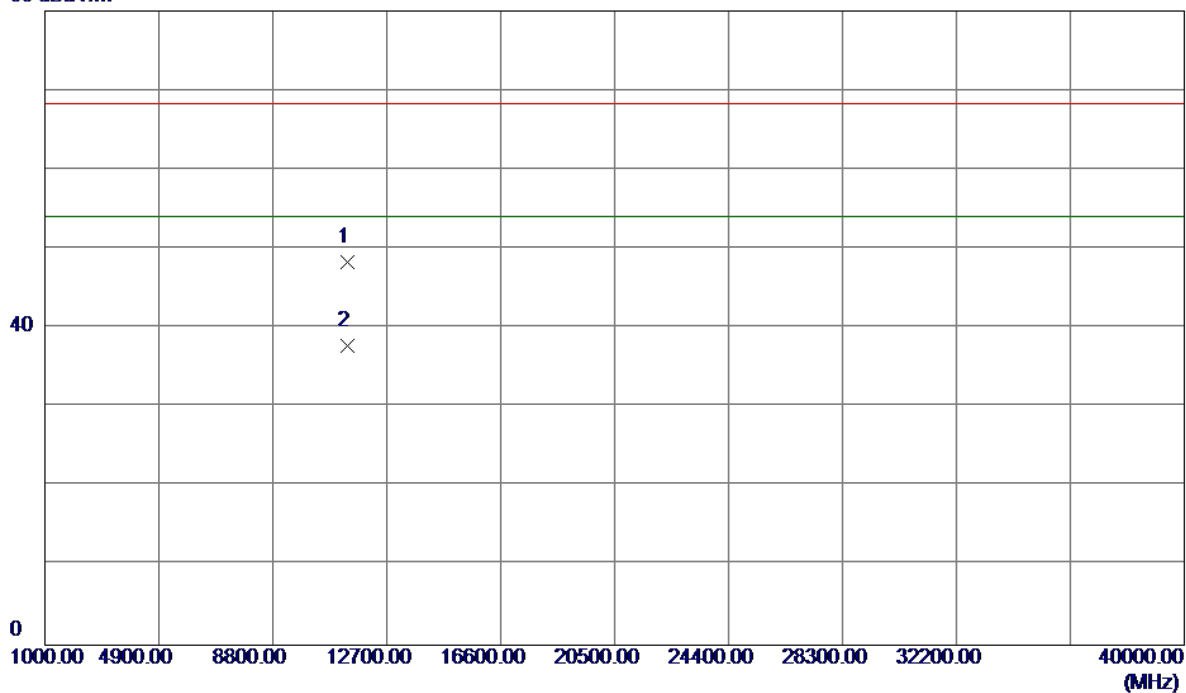


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11341.2300	31.79	16.56	48.35	68.30	-19.95	Peak	
2	11341.2300	21.26	16.56	37.82	54.00	-16.18	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal

115 dBuV/m

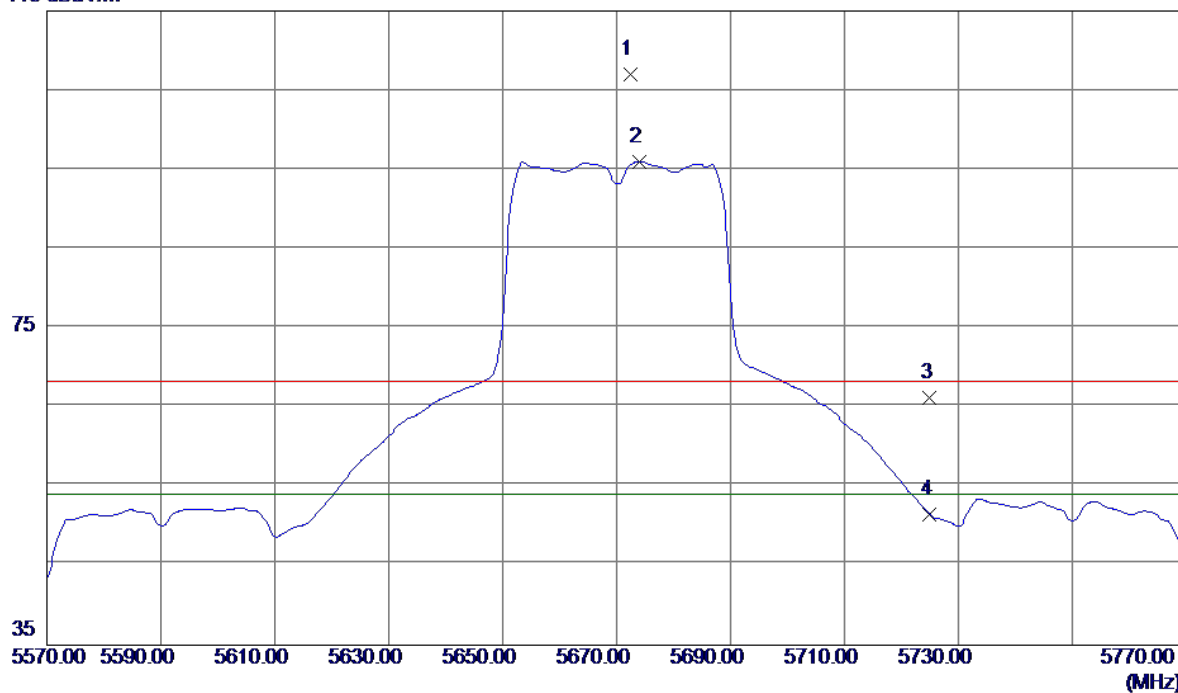


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5672.4000	65.78	41.19	106.97	68.30	38.67	Peak	No Limit
2	5674.0000	54.81	41.20	96.01	54.00	42.01	AVG	No Limit
3	5725.0000	25.00	41.27	66.27	68.30	-2.03	Peak	
4	5725.0000	10.21	41.27	51.48	54.00	-2.52	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal

80 dBuV/m

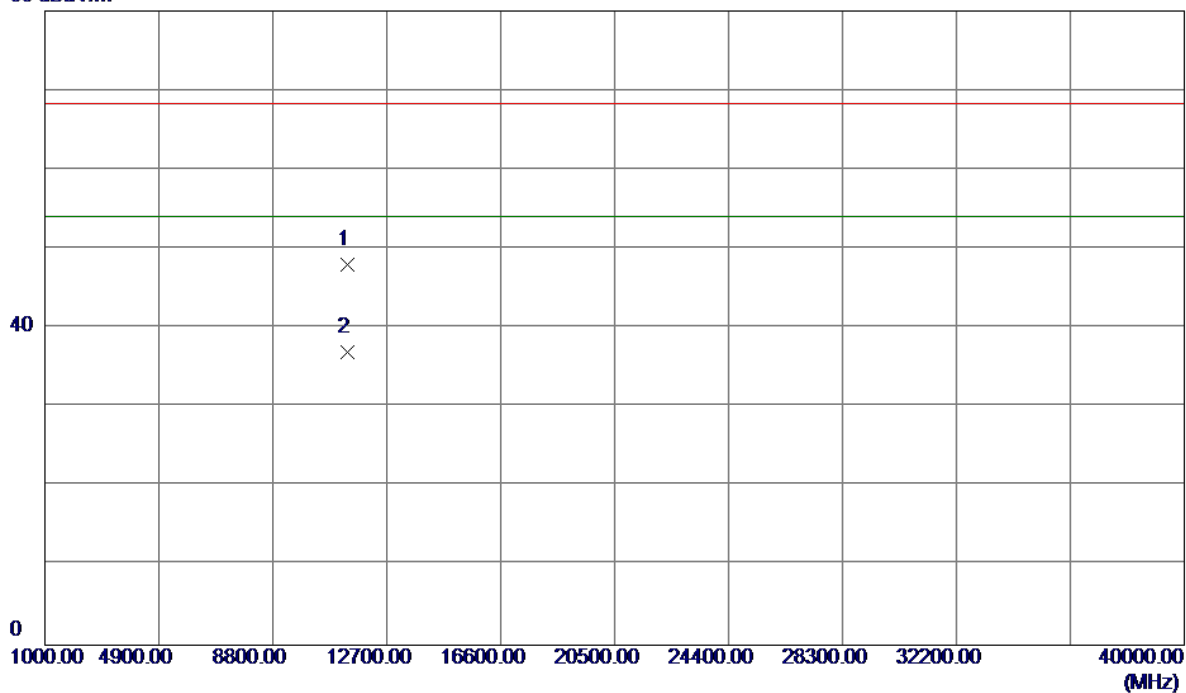


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.5199	31.47	16.56	48.03	68.30	-20.27	Peak	
2	11340.5199	20.45	16.56	37.01	54.00	-16.99	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

115 dBuV/m

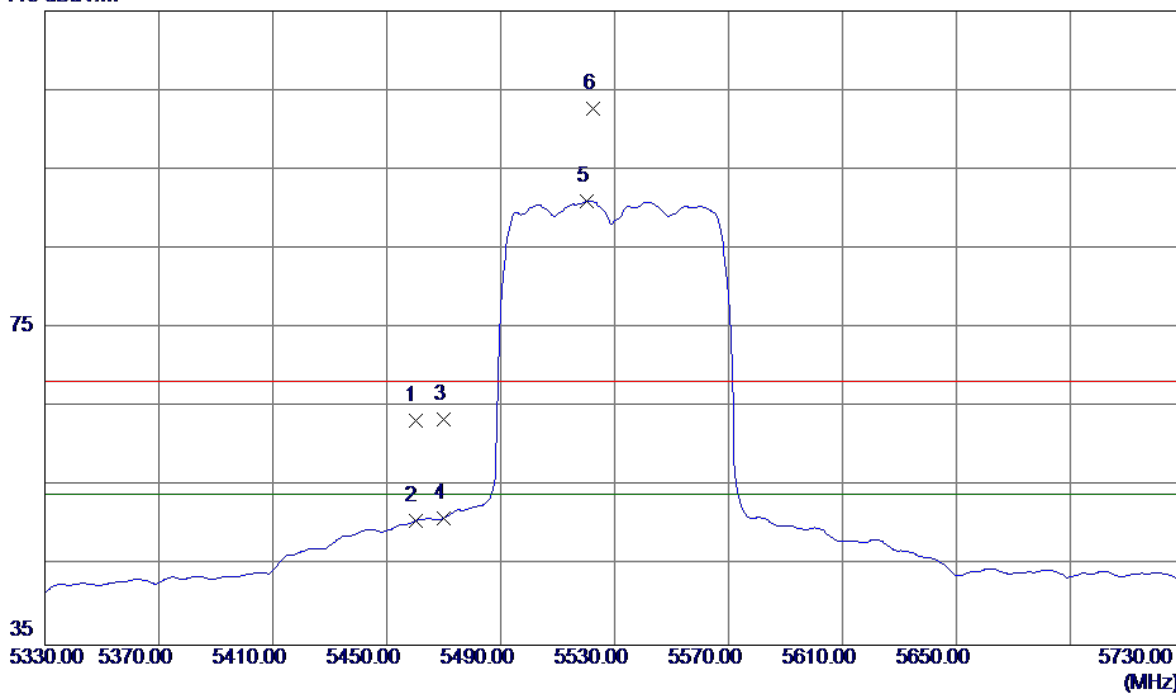


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.45	40.88	63.33	68.30	-4.97	Peak	
2	5460.0000	9.78	40.88	50.66	54.00	-3.34	AVG	
3	5470.0000	22.62	40.90	63.52	68.30	-4.78	Peak	
4	5470.0000	10.16	40.90	51.06	54.00	-2.94	AVG	
5	5520.4000	50.08	40.99	91.07	54.00	37.07	AVG	No Limit
6	5522.4000	61.70	40.99	102.69	68.30	34.39	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

80 dBuV/m

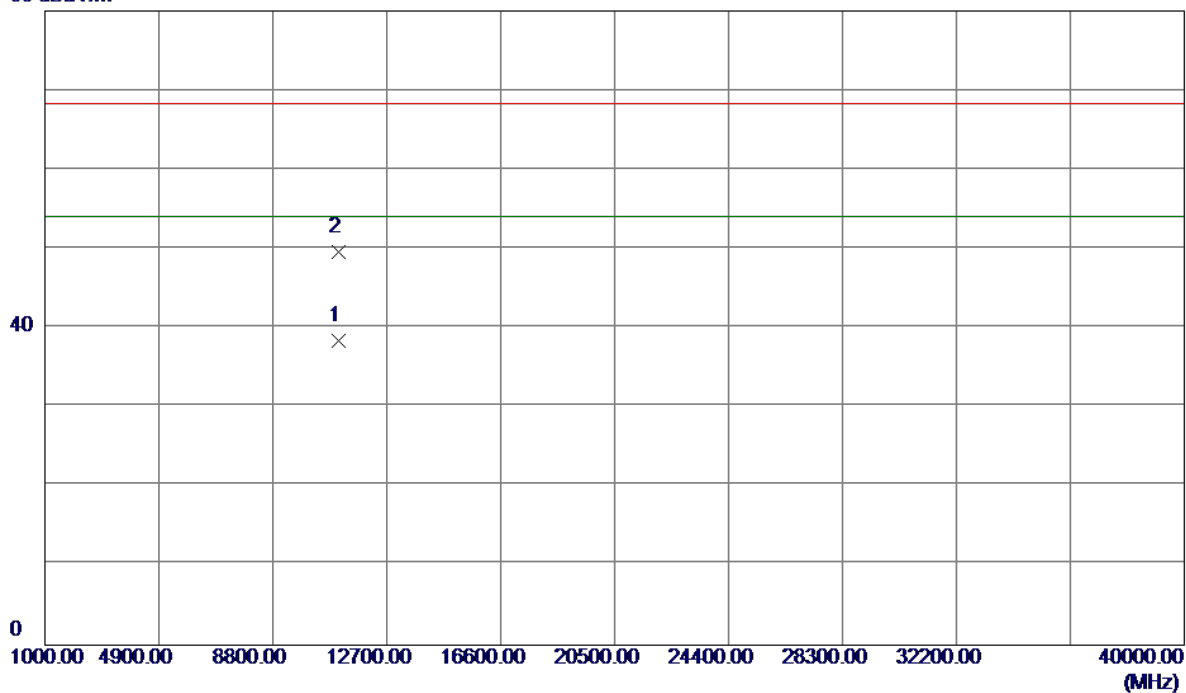


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11062.1760	22.52	15.90	38.42	54.00	-15.58	AVG	
2	11062.3380	33.75	15.90	49.65	68.30	-18.65	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal

115 dBuV/m

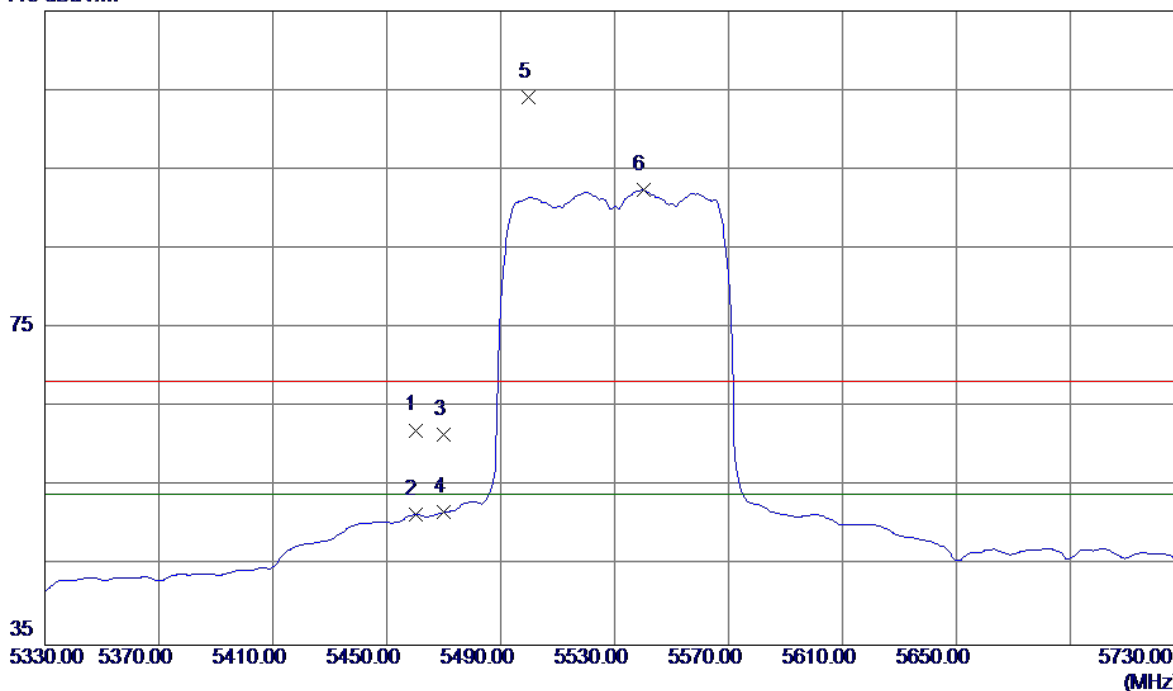


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	21.24	40.88	62.12	68.30	-6.18	Peak	
2	5460.0000	10.61	40.88	51.49	54.00	-2.51	AVG	
3	5470.0000	20.66	40.90	61.56	68.30	-6.74	Peak	
4	5470.0000	10.85	40.90	51.75	54.00	-2.25	AVG	
5	5499.6000	63.13	40.96	104.09	68.30	35.79	Peak	No Limit
6	5540.0000	51.41	41.01	92.42	54.00	38.42	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal

80 dBuV/m

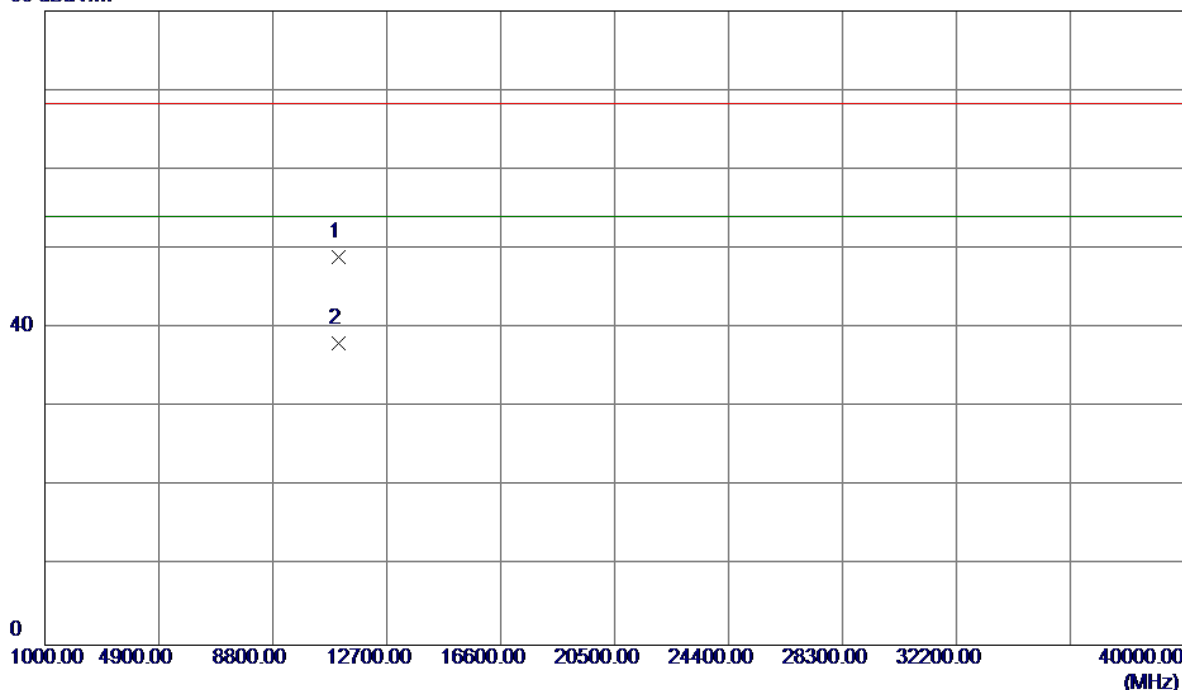


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11059.3600	33.11	15.89	49.00	68.30	-19.30	Peak	
2	11059.8700	22.14	15.89	38.03	54.00	-15.97	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

115 dBuV/m

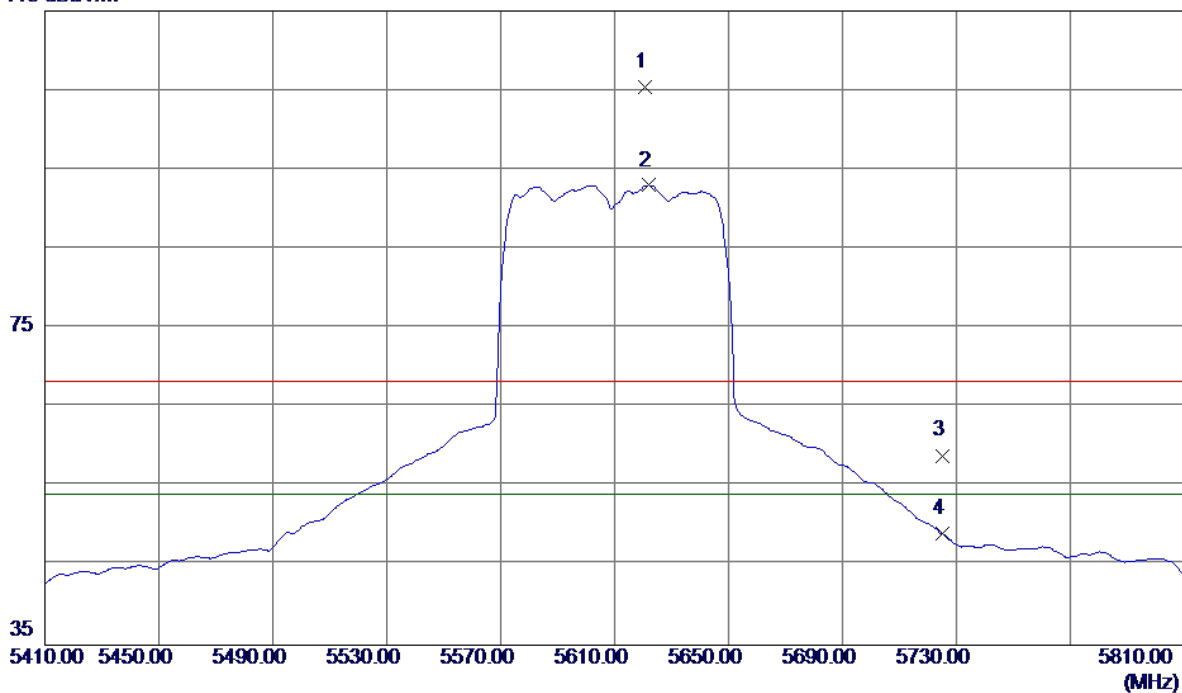


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5620.8000	64.31	41.12	105.43	68.30	37.13	Peak	No Limit
2	5622.0000	51.87	41.13	93.00	54.00	39.00	AVG	No Limit
3	5725.0000	17.65	41.27	58.92	68.30	-9.38	Peak	
4	5725.0000	7.78	41.27	49.05	54.00	-4.95	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

80 dBuV/m

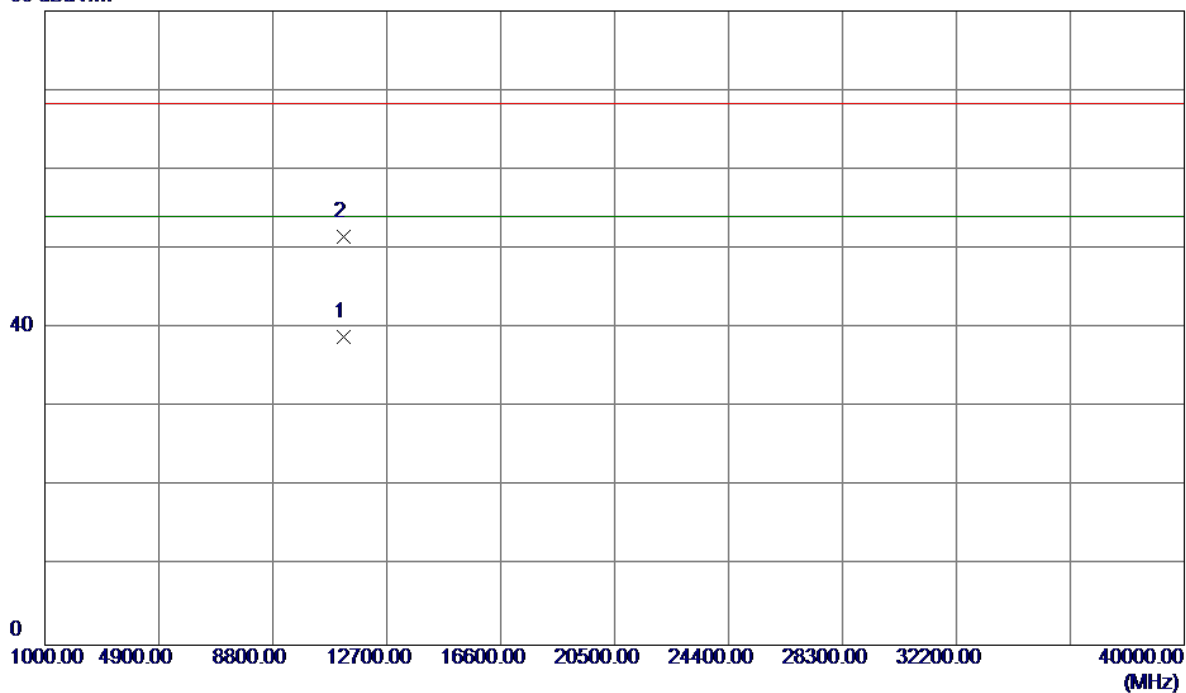


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11221.3259	22.63	16.27	38.90	54.00	-15.10	AVG	
2	11221.5519	35.21	16.28	51.49	68.30	-16.81	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal

115 dBuV/m

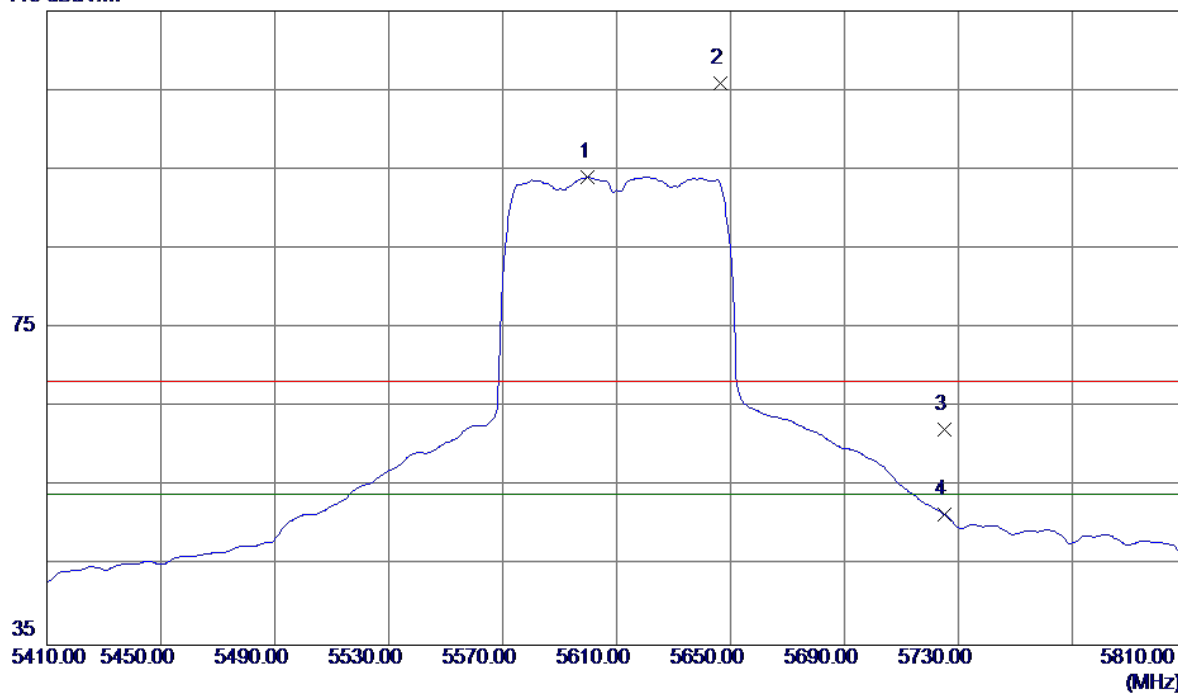


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5600.0000	53.00	41.10	94.10	54.00	40.10	AVG	No Limit
2	5646.4000	64.74	41.16	105.90	68.30	37.60	Peak	No Limit
3	5725.0000	20.90	41.27	62.17	68.30	-6.13	Peak	
4	5725.0000	10.28	41.27	51.55	54.00	-2.45	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal

80 dBuV/m

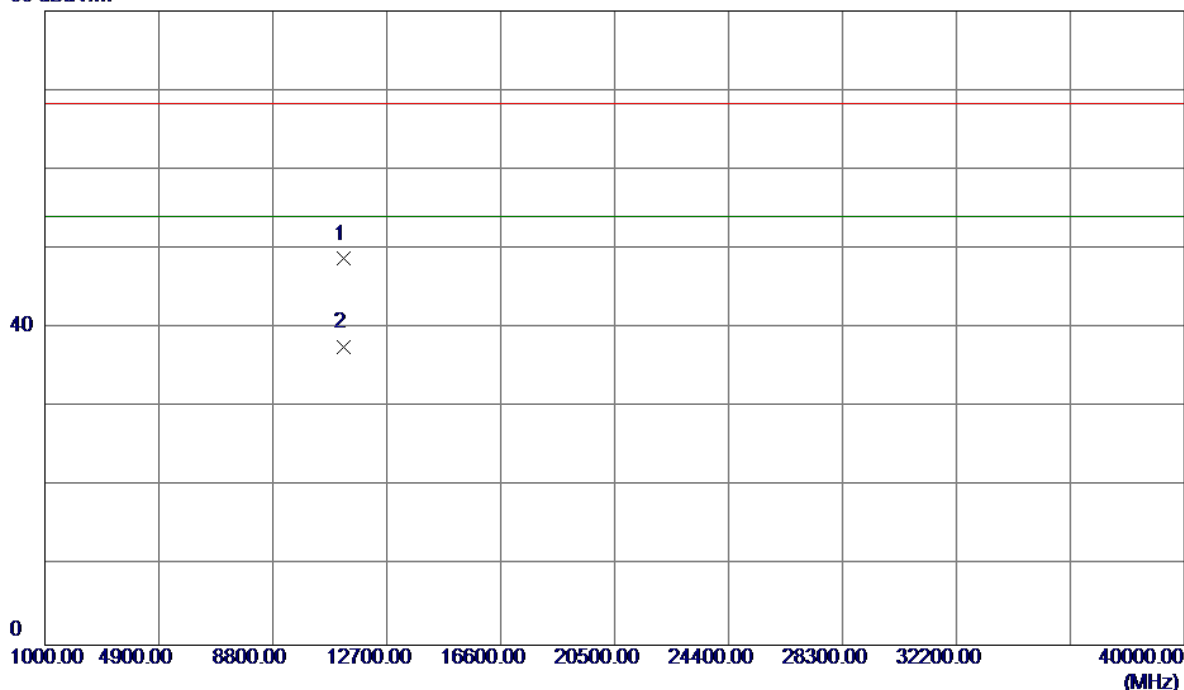


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.4500	32.45	16.27	48.72	68.30	-19.58	Peak	
2	11220.5599	21.36	16.27	37.63	54.00	-16.37	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical

115 dBuV/m

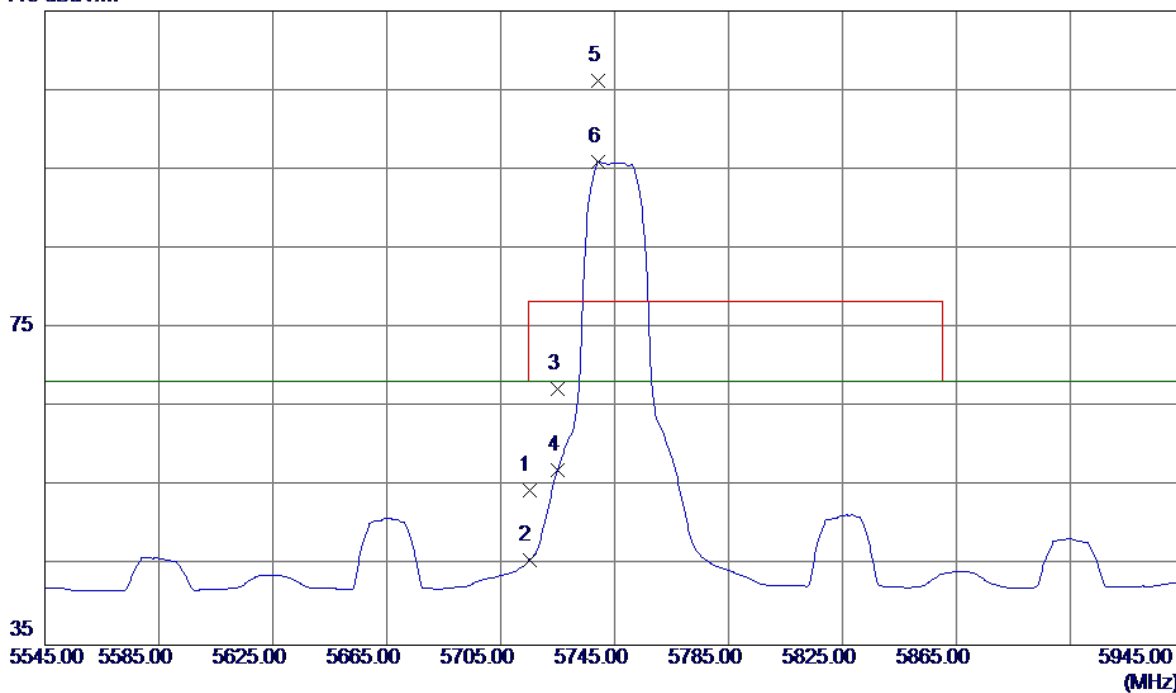


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	13.20	41.25	54.45	68.30	-13.85	Peak	
2	5715.0000	4.41	41.25	45.66	68.30	-22.64	AVG	
3	5725.0000	26.12	41.27	67.39	78.30	-10.91	Peak	
4	5725.0000	15.86	41.27	57.13	68.30	-11.17	AVG	
5	5739.4000	64.84	41.29	106.13	78.30	27.83	Peak	No Limit
6	5739.4000	54.68	41.29	95.97	68.30	27.67	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical


80 dBuV/m

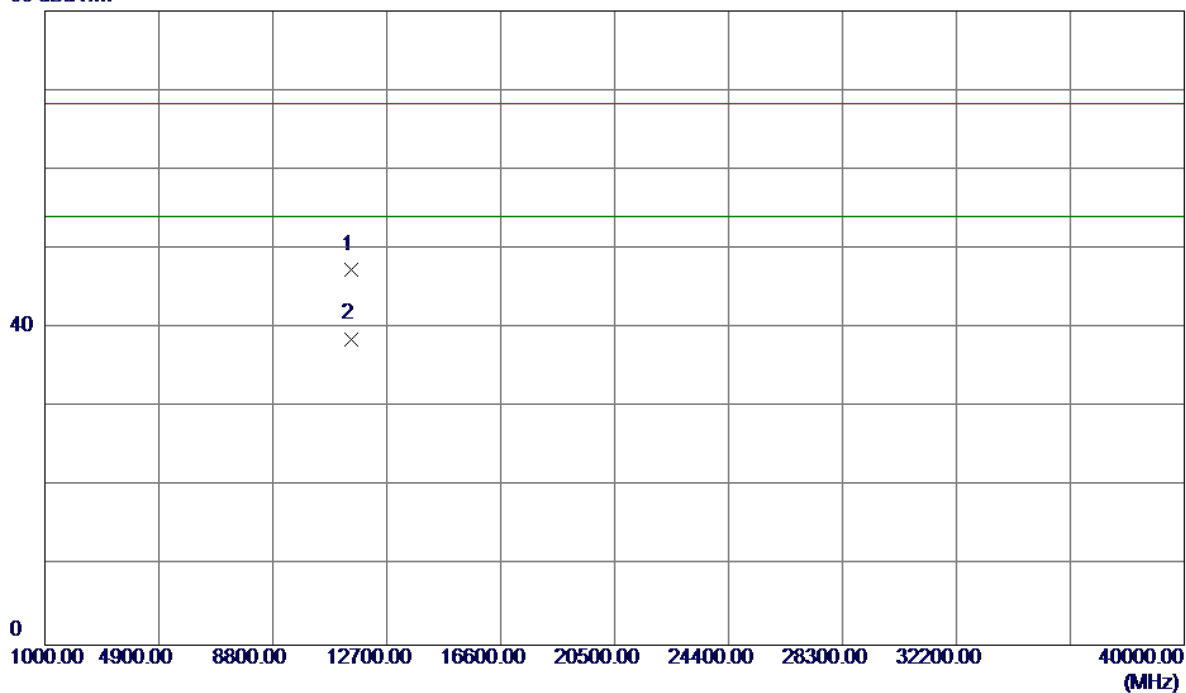

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.7100	30.41	16.91	47.32	68.30	-20.98	Peak	
2	11490.7100	21.73	16.91	38.64	54.00	-15.36	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal

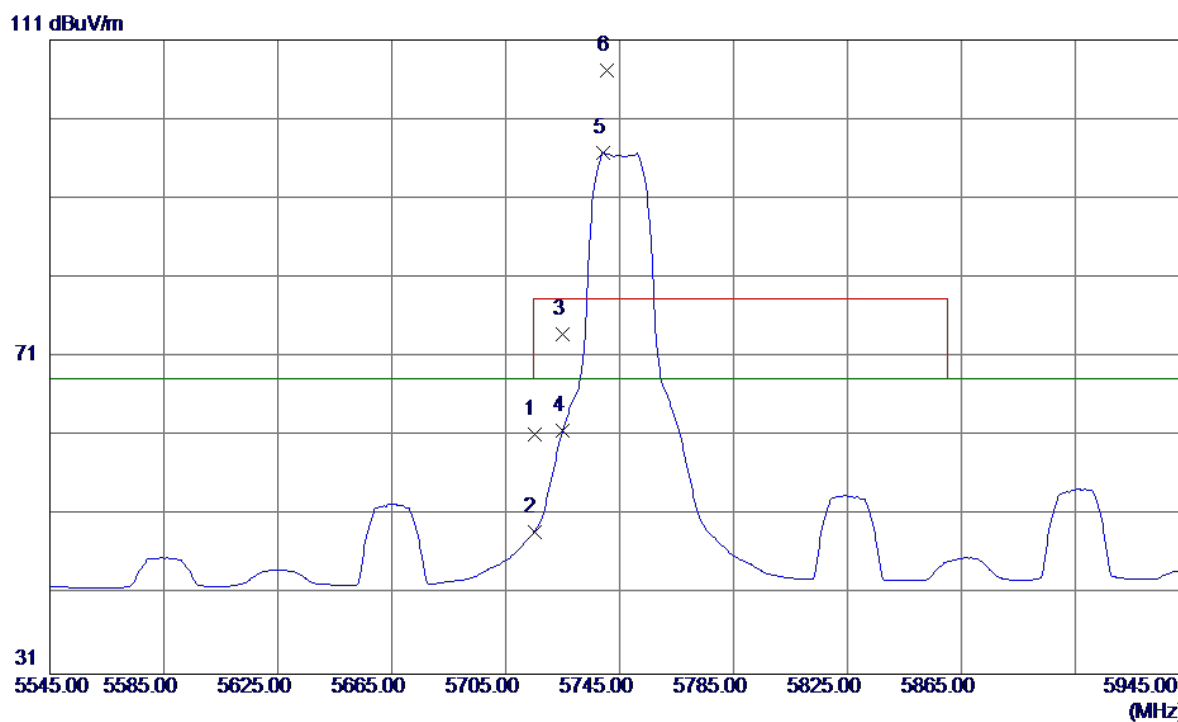


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	19.99	41.25	61.24	68.30	-7.06	Peak	
2	5715.0000	7.70	41.25	48.95	68.30	-19.35	AVG	
3	5725.0000	32.57	41.27	73.84	78.30	-4.46	Peak	
4	5725.0000	20.41	41.27	61.68	68.30	-6.62	AVG	
5	5739.4000	55.49	41.29	96.78	68.30	28.48	AVG	No Limit
6	5740.6000	65.87	41.29	107.16	78.30	28.86	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal

80 dBuV/m

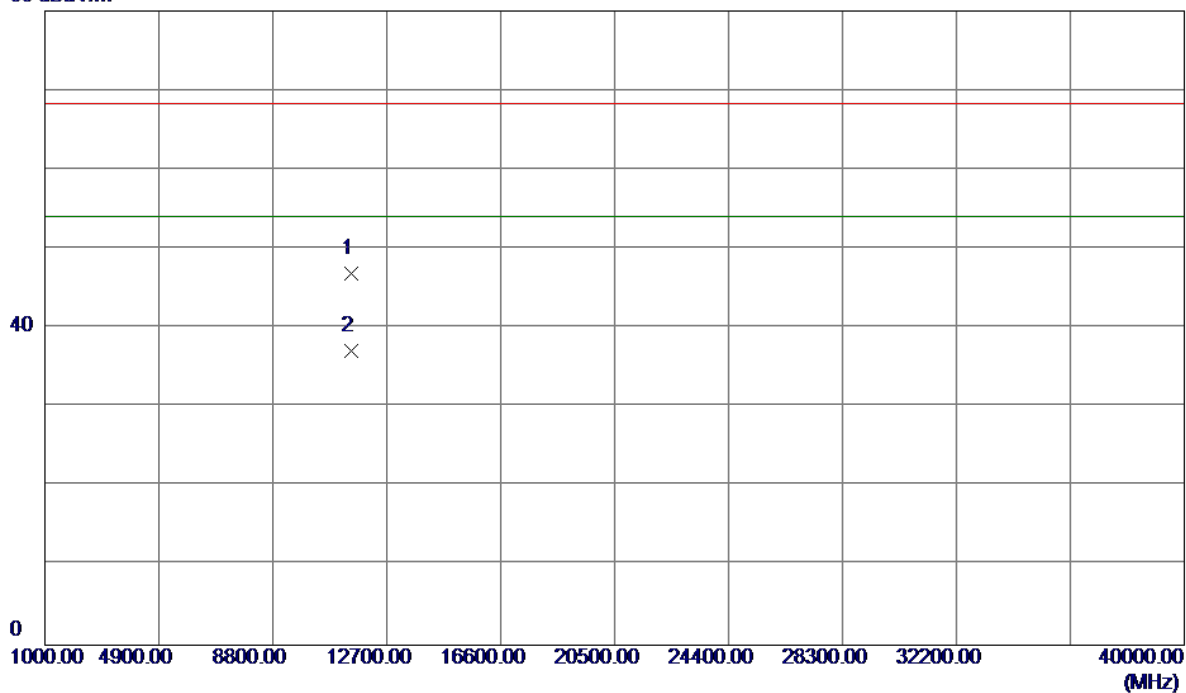


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.3400	29.92	16.91	46.83	68.30	-21.47	Peak	
2	11490.3400	20.21	16.91	37.12	54.00	-16.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical

115 dBuV/m

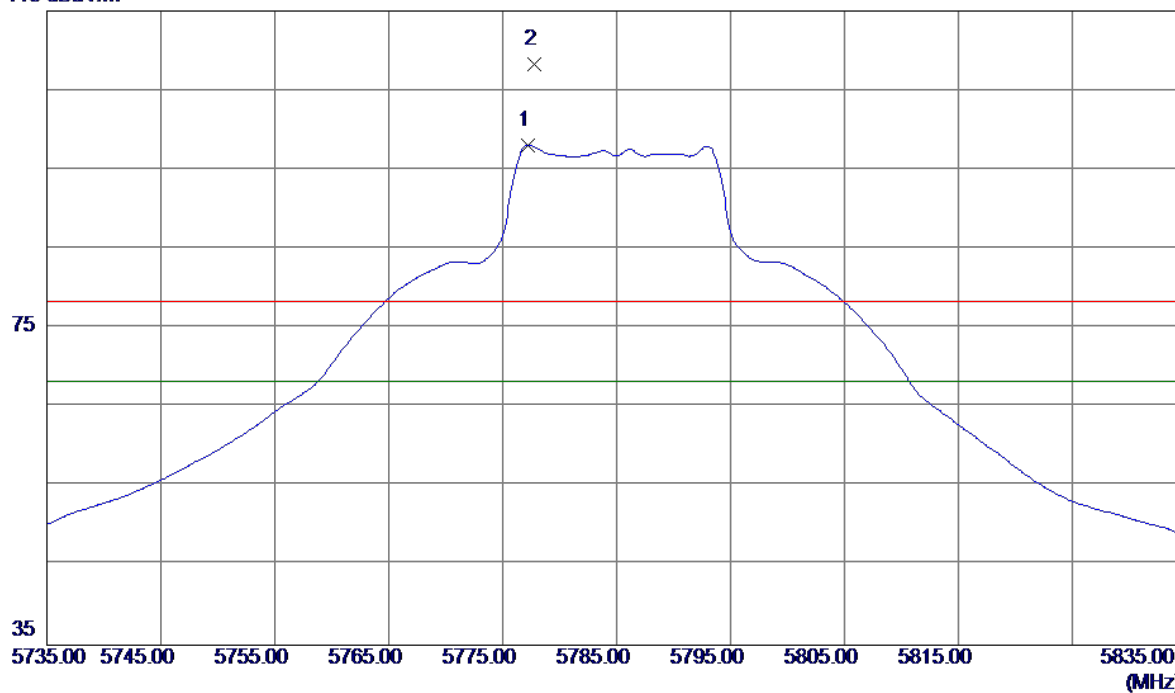


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5777.2000	56.75	41.34	98.09	78.30	19.79	Peak	No Limit
2	5777.8000	66.90	41.34	108.24	78.30	29.94	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical


80 dBuV/m

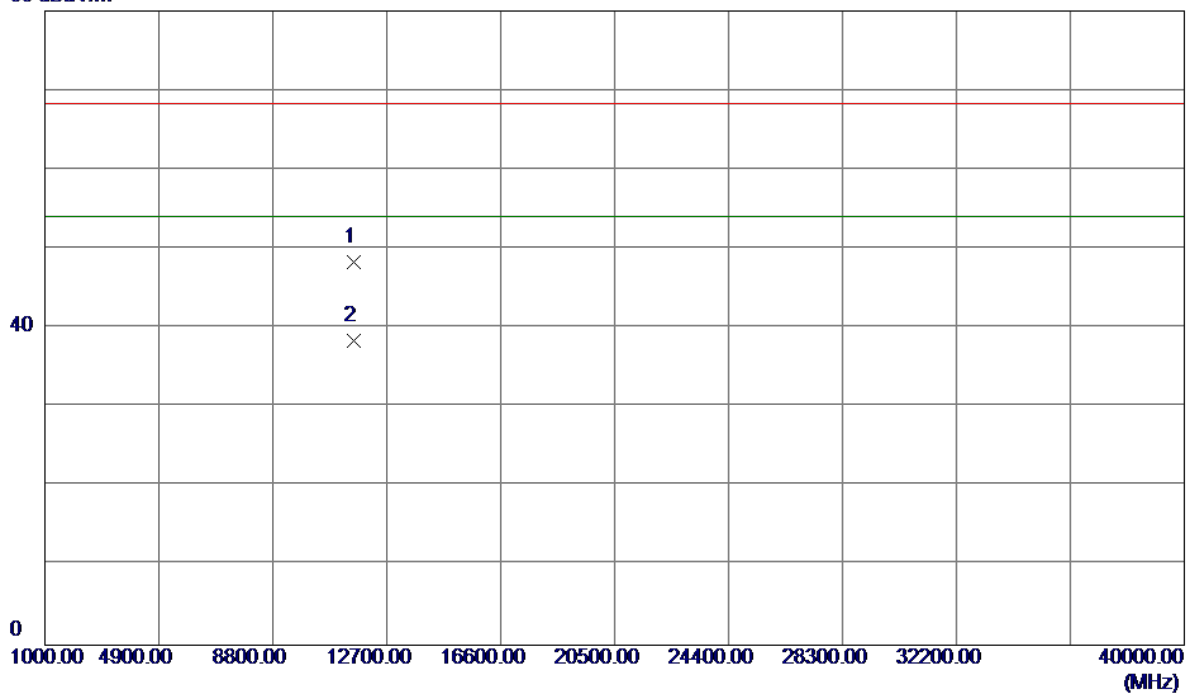

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.3640	31.34	17.05	48.39	68.30	-19.91	Peak	
2	11570.1230	21.41	17.05	38.46	54.00	-15.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal

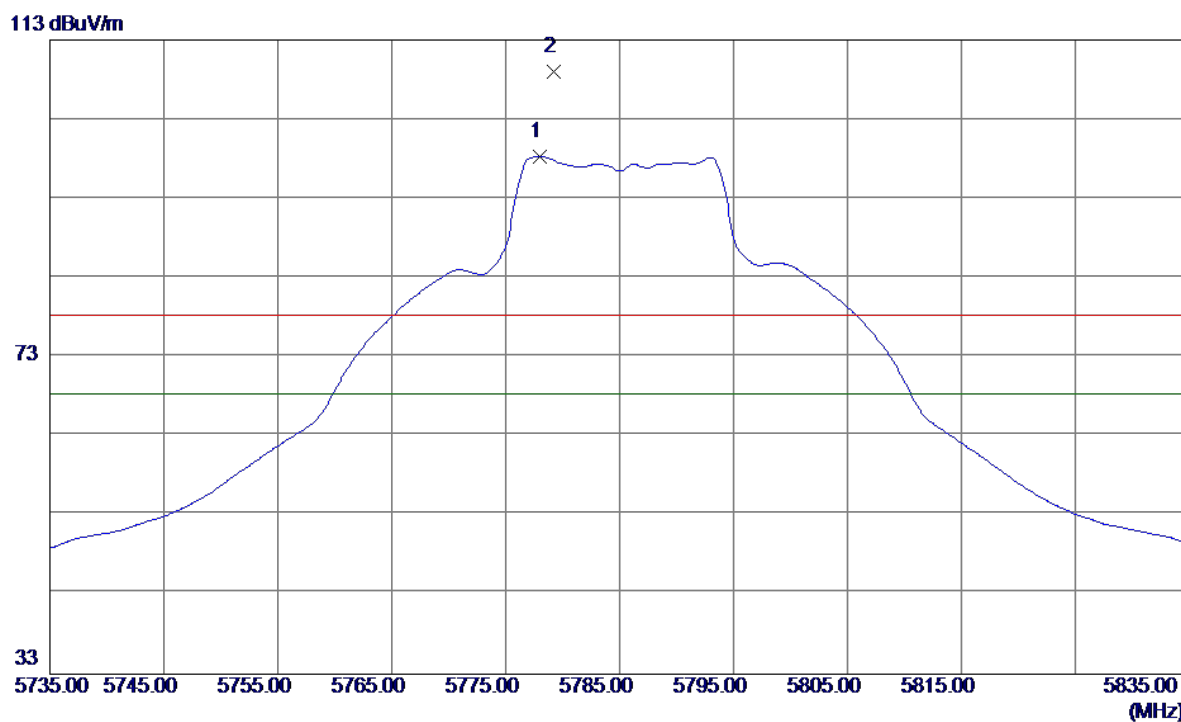


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5778.0000	56.93	41.34	98.27	68.30	29.97	AVG	No Limit
2	5779.2000	67.70	41.34	109.04	78.30	30.74	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal

80 dBuV/m

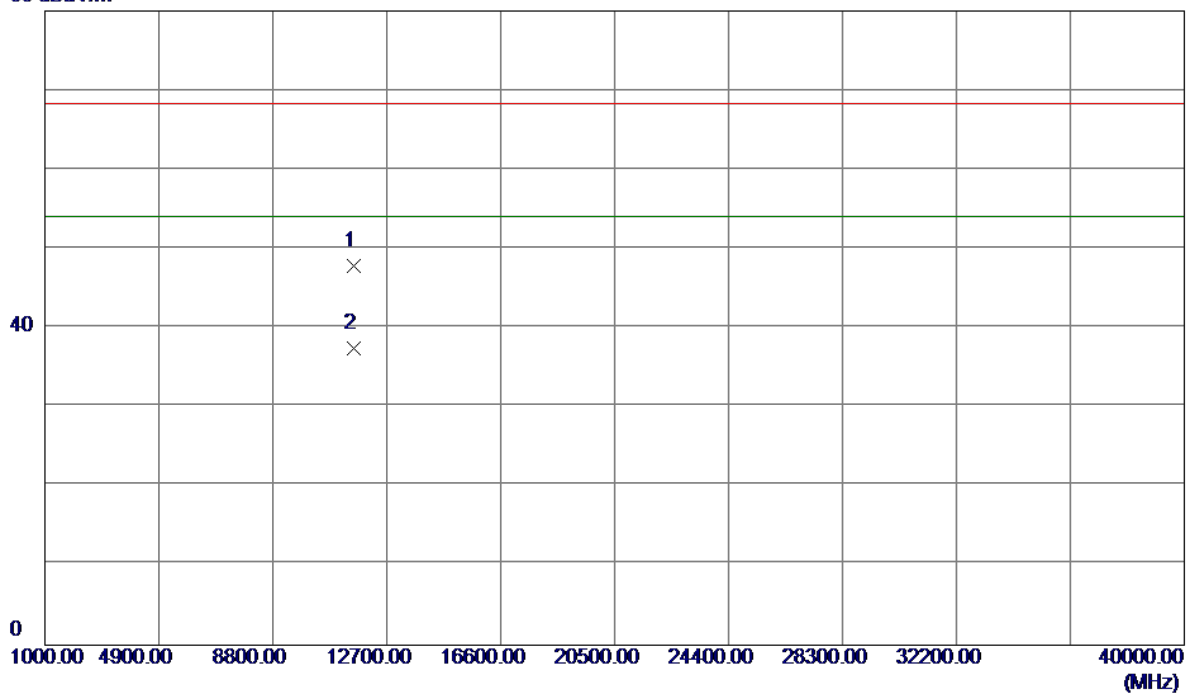


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.1700	30.80	17.05	47.85	68.30	-20.45	Peak	
2	11570.1700	20.41	17.05	37.46	54.00	-16.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical

115 dBuV/m

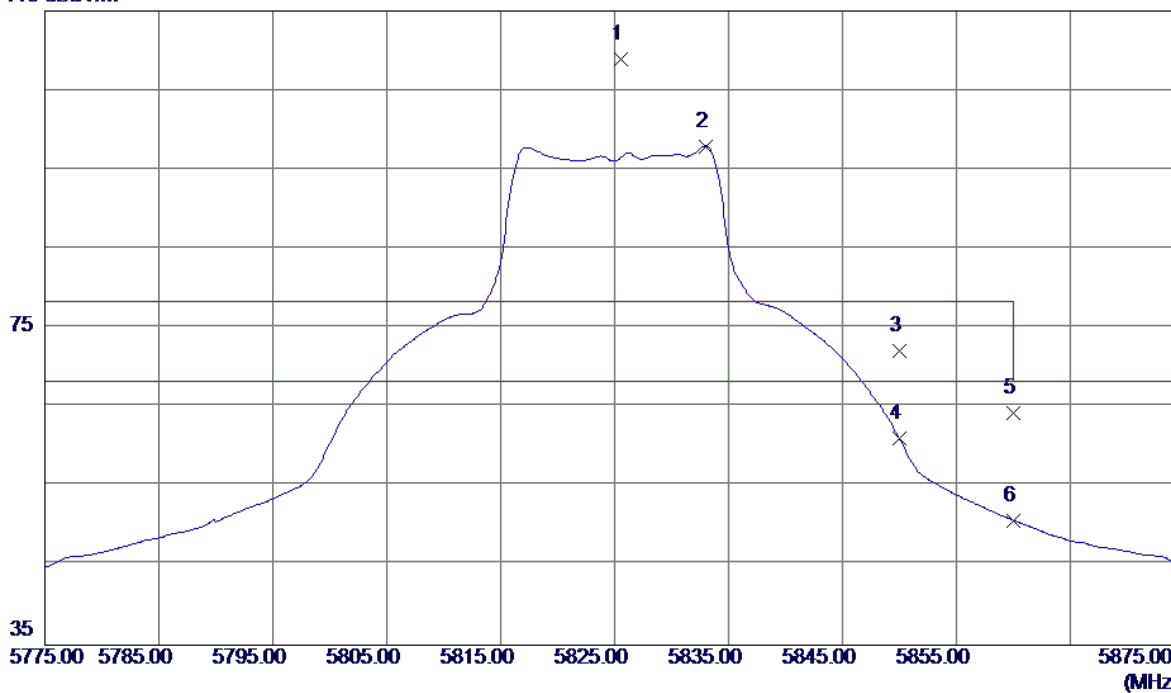


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.6000	67.57	41.40	108.97	78.30	30.67	Peak	No Limit
2	5833.0000	56.55	41.41	97.96	68.30	29.66	AVG	No Limit
3	5850.0000	30.63	41.44	72.07	78.30	-6.23	Peak	
4	5850.0000	19.69	41.44	61.13	68.30	-7.17	AVG	
5	5860.0000	22.78	41.45	64.23	78.30	-14.07	Peak	
6	5860.0000	9.29	41.45	50.74	68.30	-17.56	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical


80 dBuV/m

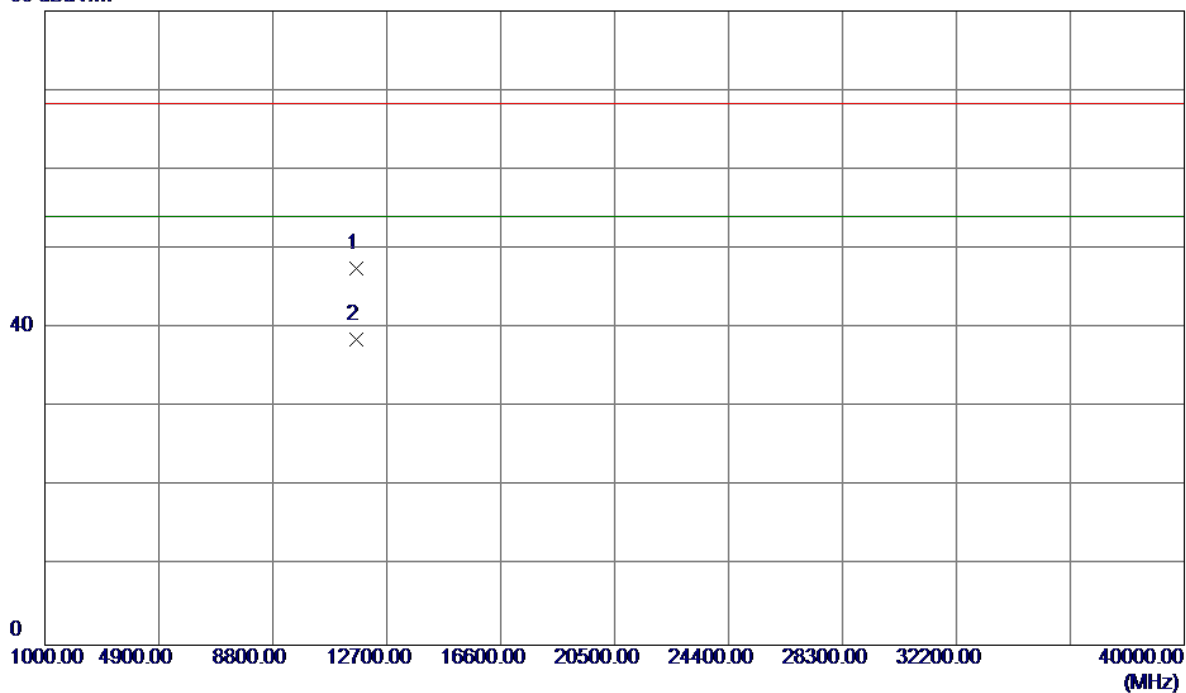

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.1300	30.38	17.17	47.55	68.30	-20.75	Peak	
2	11650.1300	21.44	17.17	38.61	54.00	-15.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Horizontal

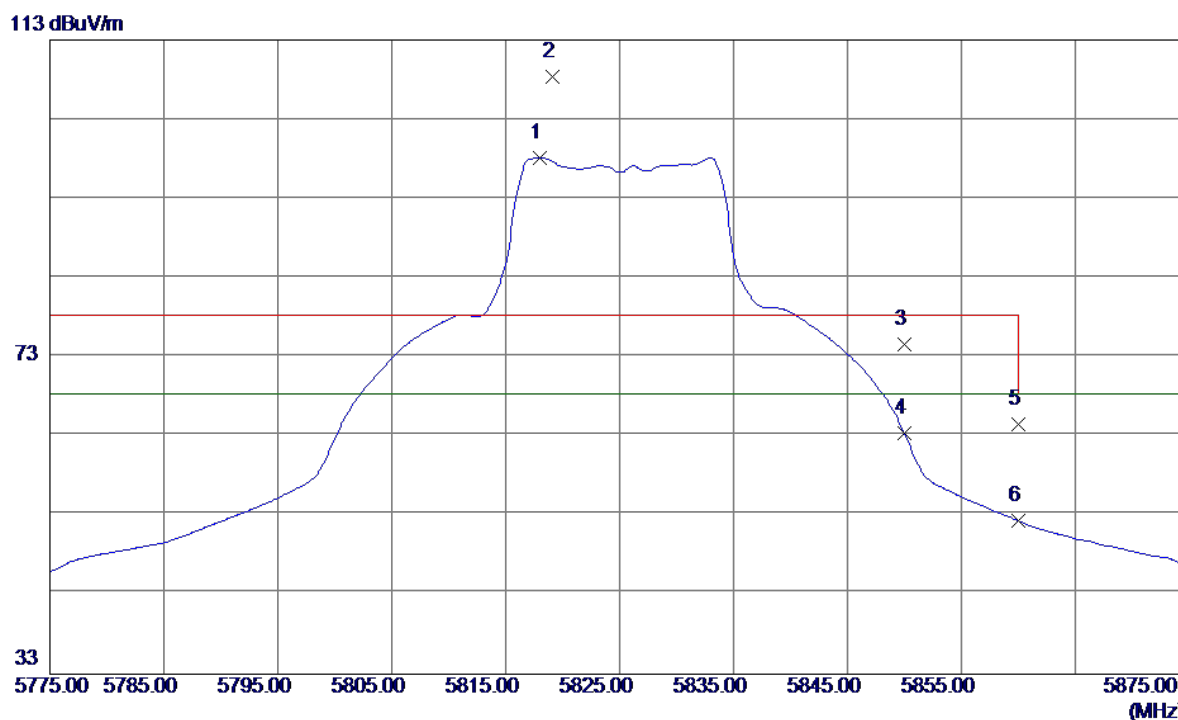


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5818.0000	56.74	41.39	98.13	68.30	29.83	AVG	No Limit
2	5819.1000	66.99	41.39	108.38	78.30	30.08	Peak	No Limit
3	5850.0000	33.14	41.44	74.58	78.30	-3.72	Peak	
4	5850.0000	22.03	41.44	63.47	68.30	-4.83	AVG	
5	5860.0000	23.03	41.45	64.48	78.30	-13.82	Peak	
6	5860.0000	10.88	41.45	52.33	68.30	-15.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Horizontal

80 dBuV/m

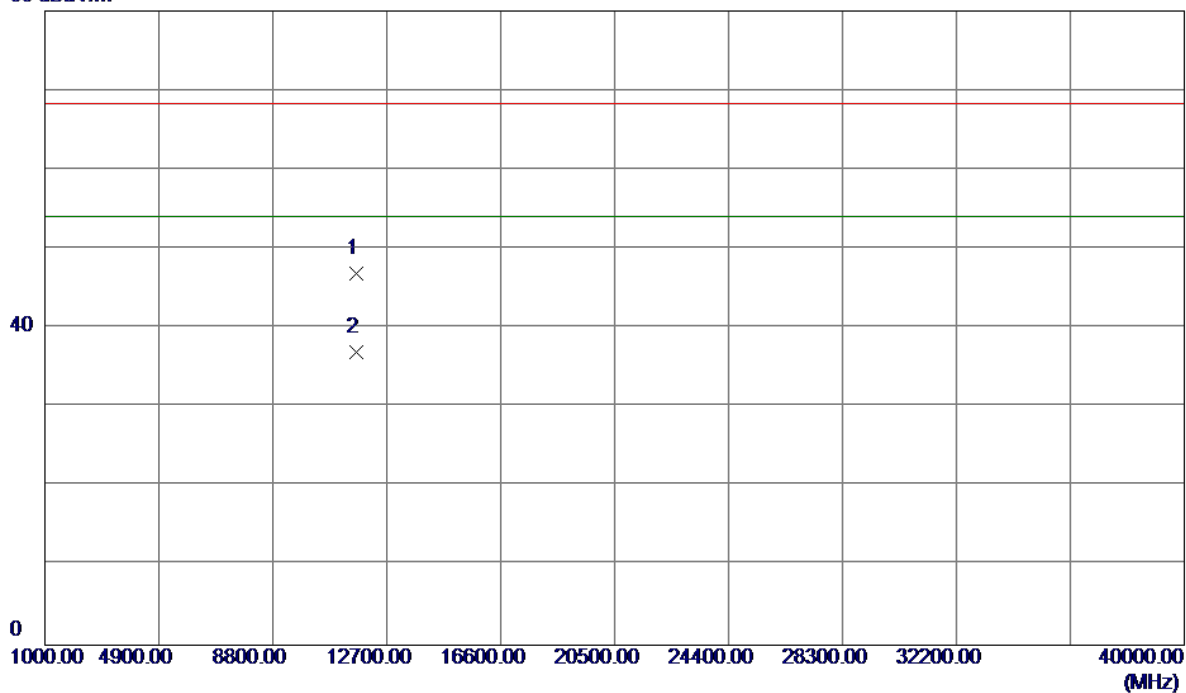


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.3400	29.71	17.17	46.88	68.30	-21.42	Peak	
2	11650.3400	19.85	17.17	37.02	54.00	-16.98	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical

115 dBuV/m

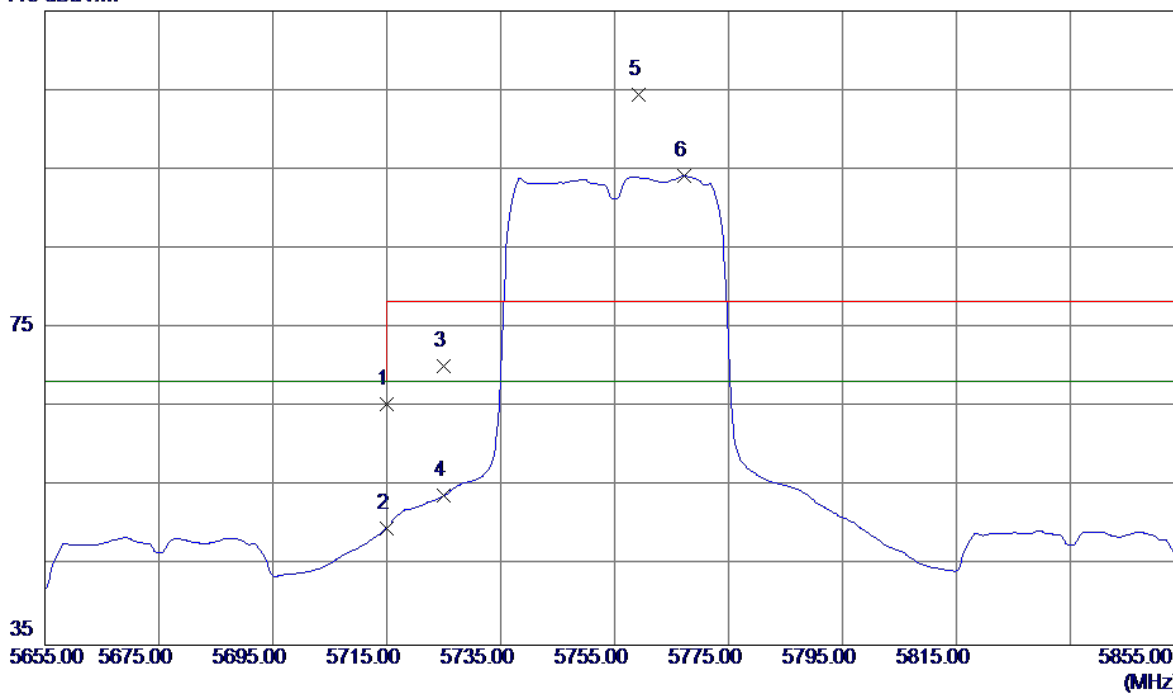


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	24.13	41.25	65.38	68.30	-2.92	Peak	
2	5715.0000	8.54	41.25	49.79	68.30	-18.51	AVG	
3	5725.0000	28.97	41.27	70.24	78.30	-8.06	Peak	
4	5725.0000	12.60	41.27	53.87	68.30	-14.43	AVG	
5	5759.2000	63.20	41.31	104.51	78.30	26.21	Peak	No Limit
6	5767.2000	52.84	41.32	94.16	68.30	25.86	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical

80 dBuV/m

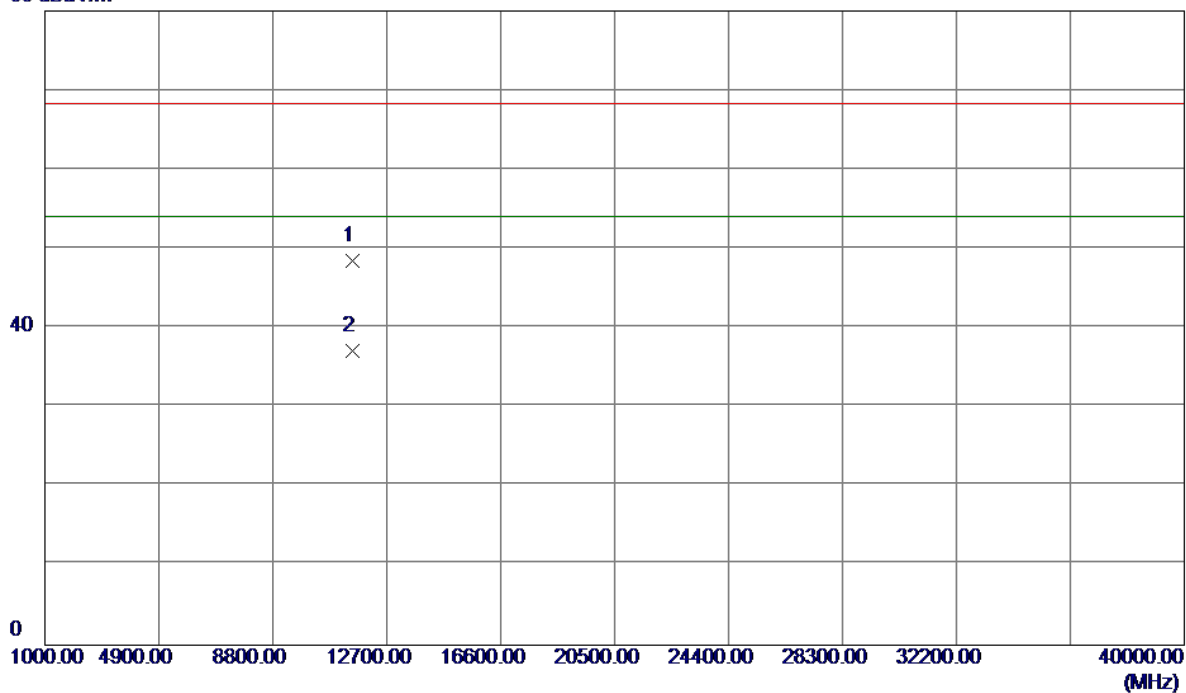


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.7730	31.57	16.95	48.52	68.30	-19.78	Peak	
2	11510.2730	20.16	16.95	37.11	54.00	-16.89	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Horizontal

112 dBuV/m

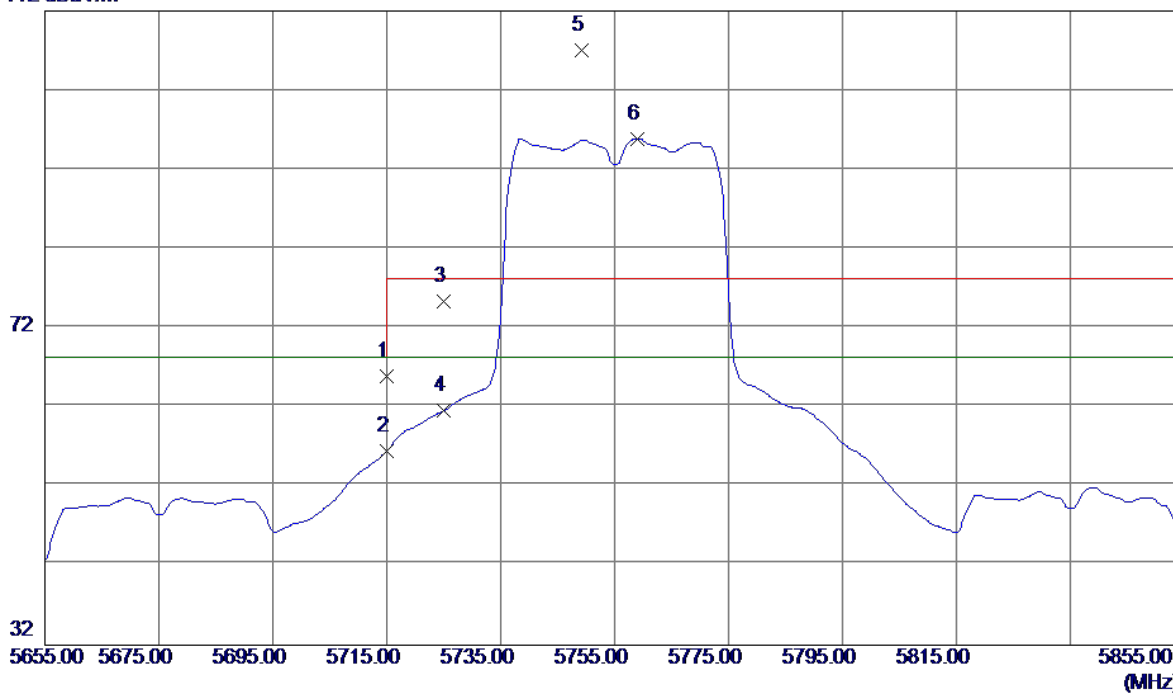


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	24.73	41.25	65.98	68.30	-2.32	Peak	
2	5715.0000	15.22	41.25	56.47	68.30	-11.83	AVG	
3	5725.0000	34.05	41.27	75.32	78.30	-2.98	Peak	
4	5725.0000	20.32	41.27	61.59	68.30	-6.71	AVG	
5	5749.2000	65.76	41.30	107.06	78.30	28.76	Peak	No Limit
6	5759.0000	54.59	41.31	95.90	68.30	27.60	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Horizontal

80 dBuV/m

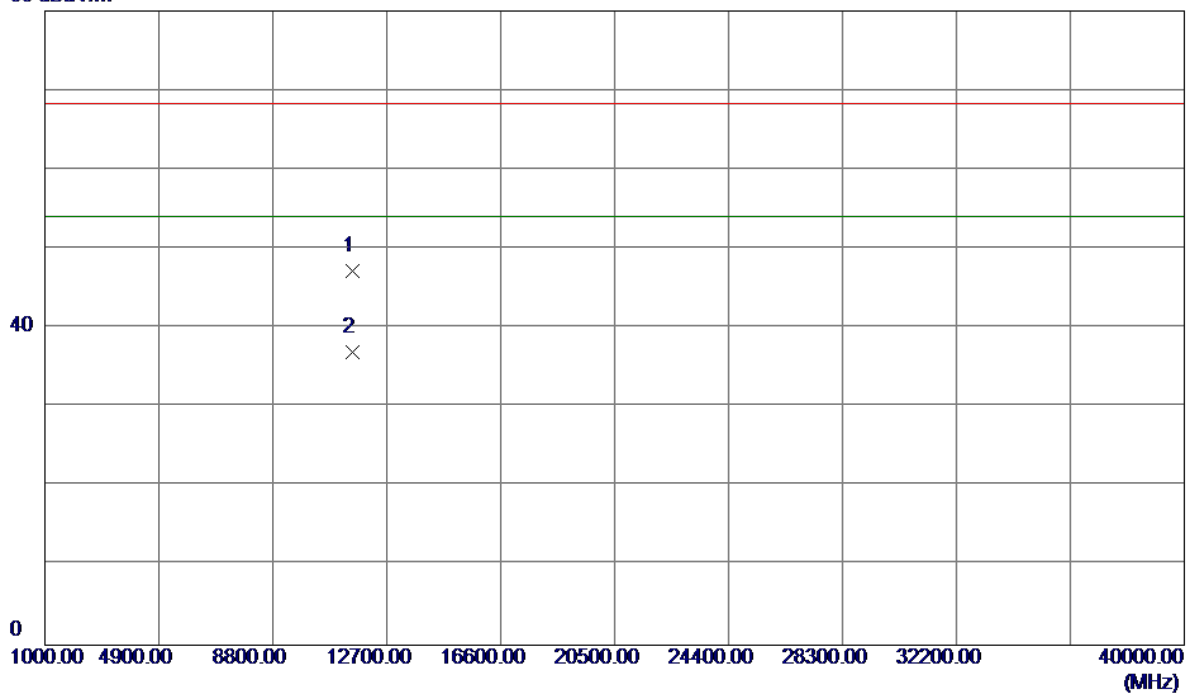


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.2699	30.29	16.95	47.24	68.30	-21.06	Peak	
2	11510.2699	20.08	16.95	37.03	54.00	-16.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical

115 dBuV/m

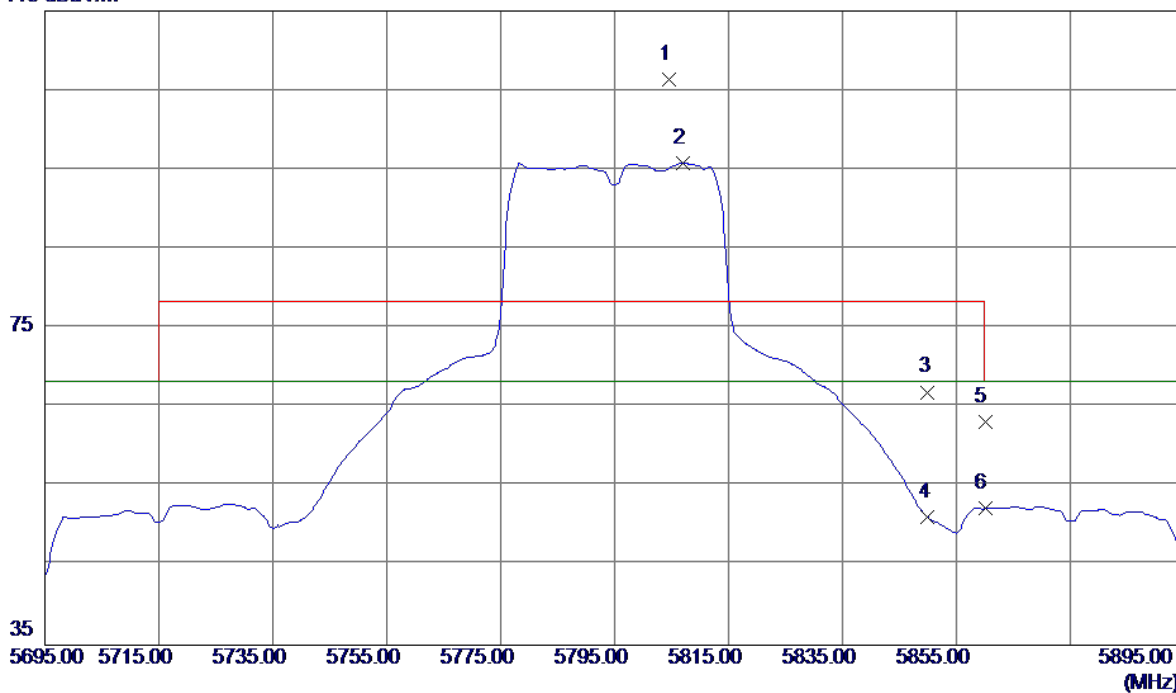


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5804.6000	65.01	41.37	106.38	78.30	28.08	Peak	No Limit
2	5807.0000	54.46	41.38	95.84	68.30	27.54	AVG	No Limit
3	5850.0000	25.48	41.44	66.92	78.30	-11.38	Peak	
4	5850.0000	9.65	41.44	51.09	68.30	-17.21	AVG	
5	5860.0000	21.77	41.45	63.22	78.30	-15.08	Peak	
6	5860.0000	10.82	41.45	52.27	68.30	-16.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical


80 dBuV/m

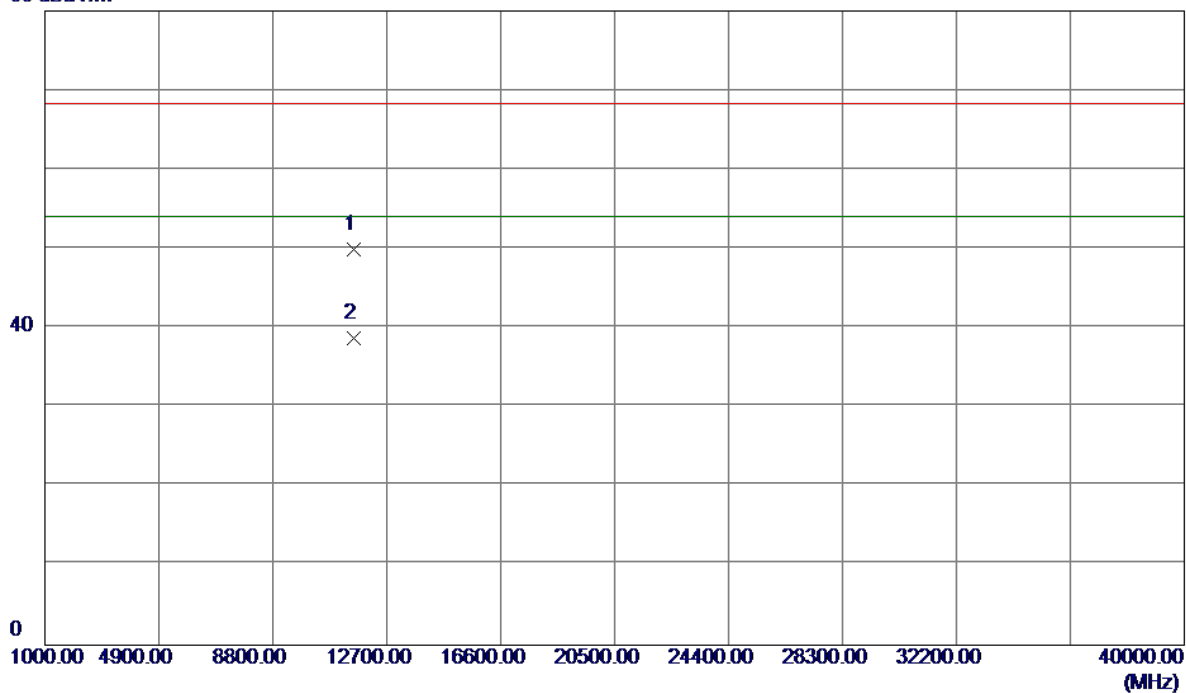

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11590.0300	32.80	17.08	49.88	68.30	-18.42	Peak	
2	11590.0300	21.58	17.08	38.66	54.00	-15.34	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

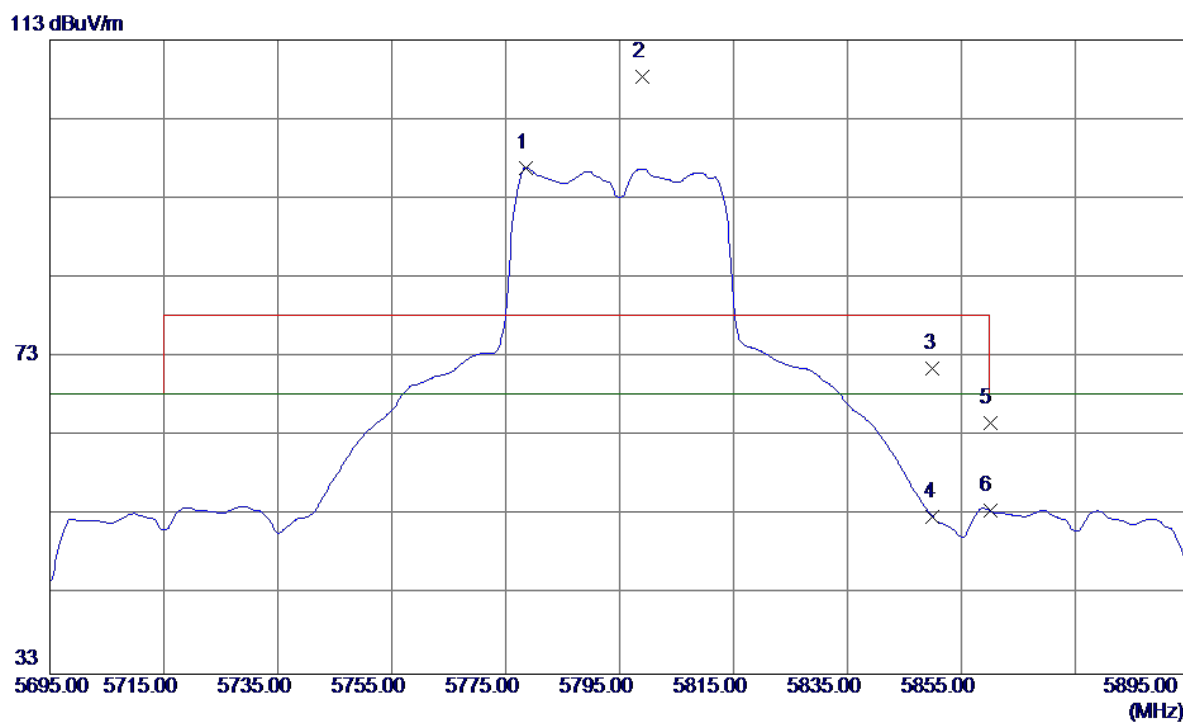


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5778.6000	55.56	41.34	96.90	68.30	28.60	AVG	No Limit
2	5799.0000	66.99	41.37	108.36	78.30	30.06	Peak	No Limit
3	5850.0000	30.09	41.44	71.53	78.30	-6.77	Peak	
4	5850.0000	11.35	41.44	52.79	68.30	-15.51	AVG	
5	5860.0000	23.19	41.45	64.64	78.30	-13.66	Peak	
6	5860.0000	12.18	41.45	53.63	68.30	-14.67	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

80 dBuV/m

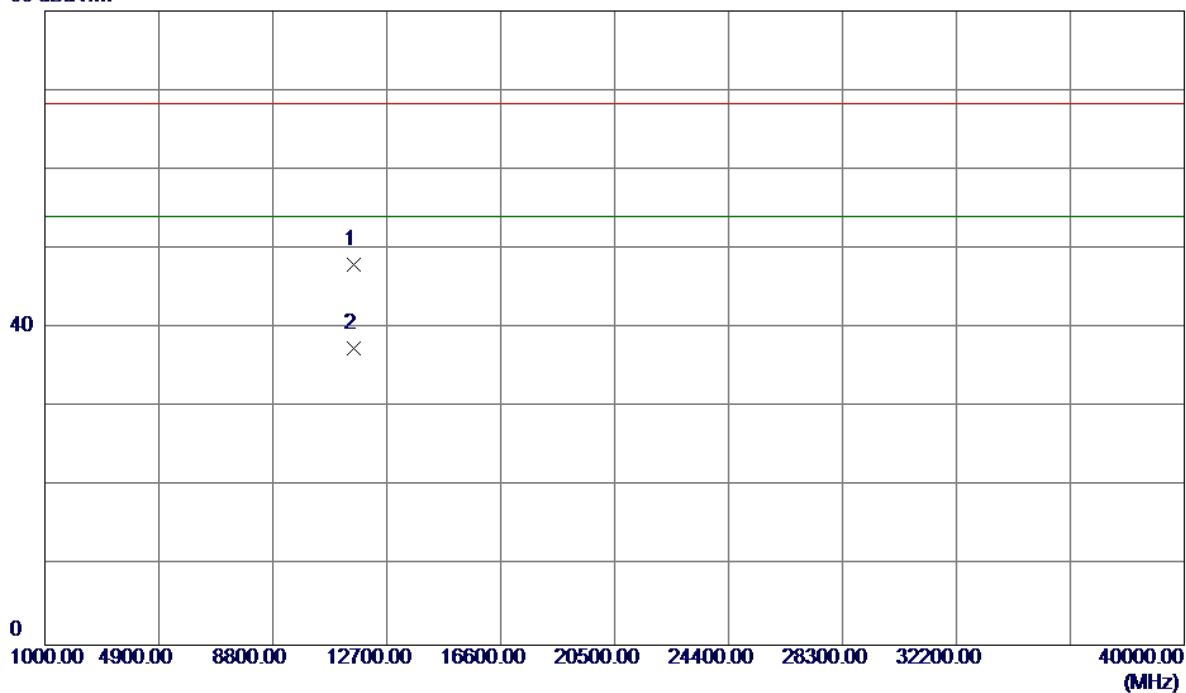


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.7400	30.94	17.08	48.02	68.30	-20.28	Peak	
2	11590.7400	20.38	17.08	37.46	54.00	-16.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

115 dBuV/m

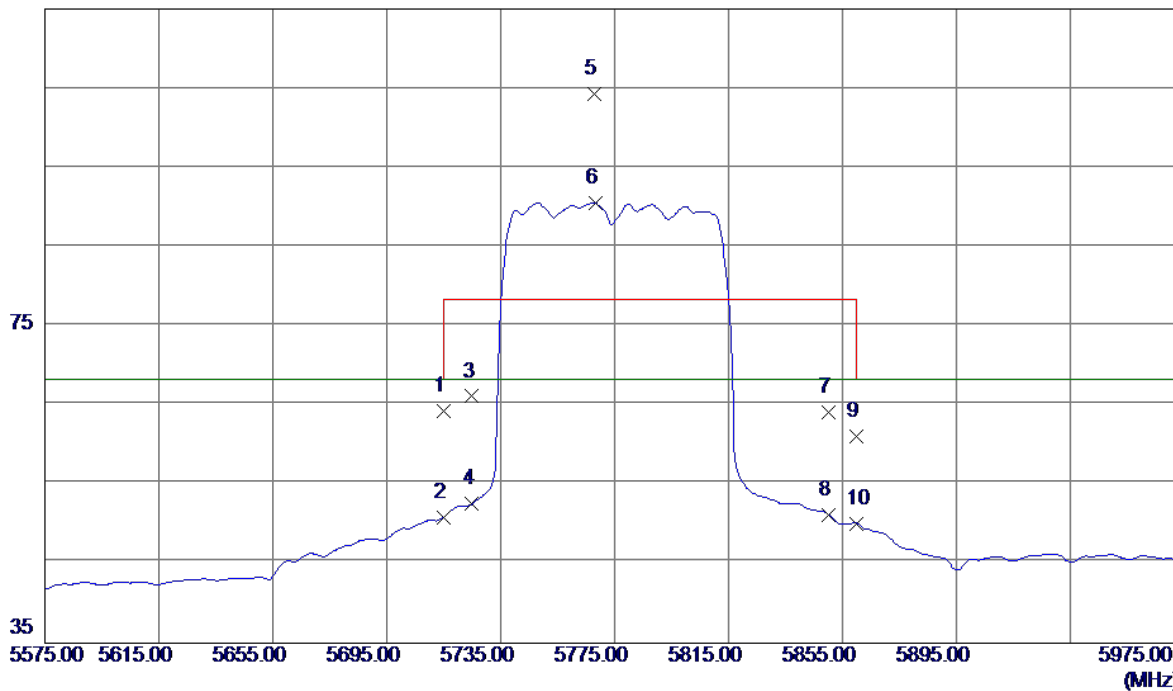


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	23.00	41.25	64.25	68.30	-4.05	Peak	
2	5715.0000	9.65	41.25	50.90	68.30	-17.40	AVG	
3	5725.0000	24.85	41.27	66.12	78.30	-12.18	Peak	
4	5725.0000	11.35	41.27	52.62	68.30	-15.68	AVG	
5	5767.8000	62.92	41.32	104.24	78.30	25.94	Peak	No Limit
6	5768.2000	49.25	41.32	90.57	68.30	22.27	AVG	No Limit
7	5850.0000	22.74	41.44	64.18	78.30	-14.12	Peak	
8	5850.0000	9.77	41.44	51.21	68.30	-17.09	AVG	
9	5860.0000	19.57	41.45	61.02	78.30	-17.28	Peak	
10	5860.0000	8.64	41.45	50.09	68.30	-18.21	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

80 dBuV/m

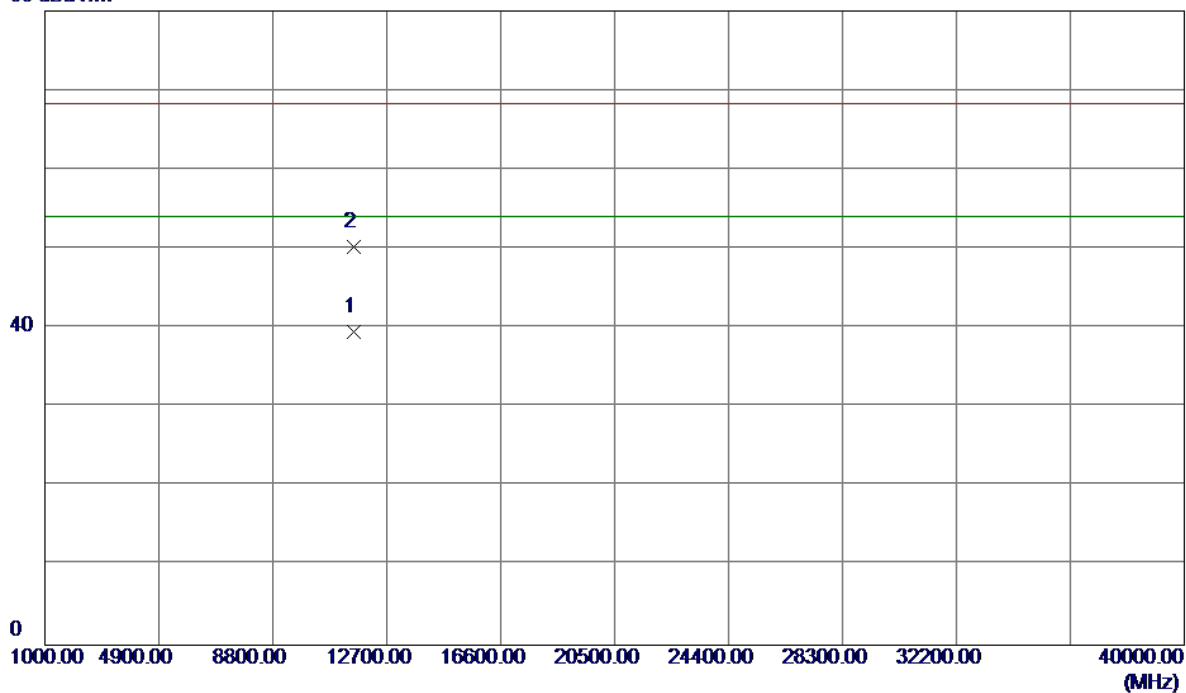


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11552.1560	22.52	17.02	39.54	54.00	-14.46	AVG	
2	11552.3690	33.21	17.02	50.23	68.30	-18.07	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

115 dBuV/m

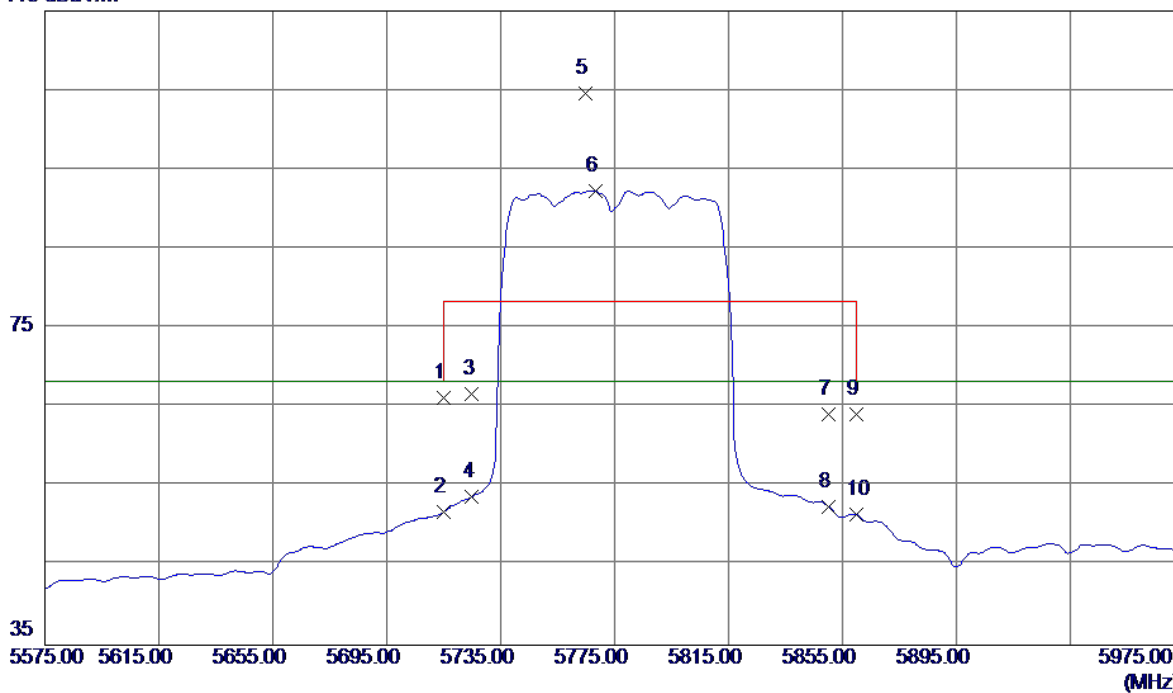


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	24.94	41.25	66.19	68.30	-2.11	Peak	
2	5715.0000	10.53	41.25	51.78	68.30	-16.52	AVG	
3	5725.0000	25.37	41.27	66.64	78.30	-11.66	Peak	
4	5725.0000	12.52	41.27	53.79	68.30	-14.51	AVG	
5	5764.6000	63.31	41.32	104.63	78.30	26.33	Peak	No Limit
6	5768.2000	51.02	41.32	92.34	68.30	24.04	AVG	No Limit
7	5850.0000	22.63	41.44	64.07	78.30	-14.23	Peak	
8	5850.0000	11.03	41.44	52.47	68.30	-15.83	AVG	
9	5860.0000	22.65	41.45	64.10	78.30	-14.20	Peak	
10	5860.0000	9.97	41.45	51.42	68.30	-16.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

80 dBuV/m

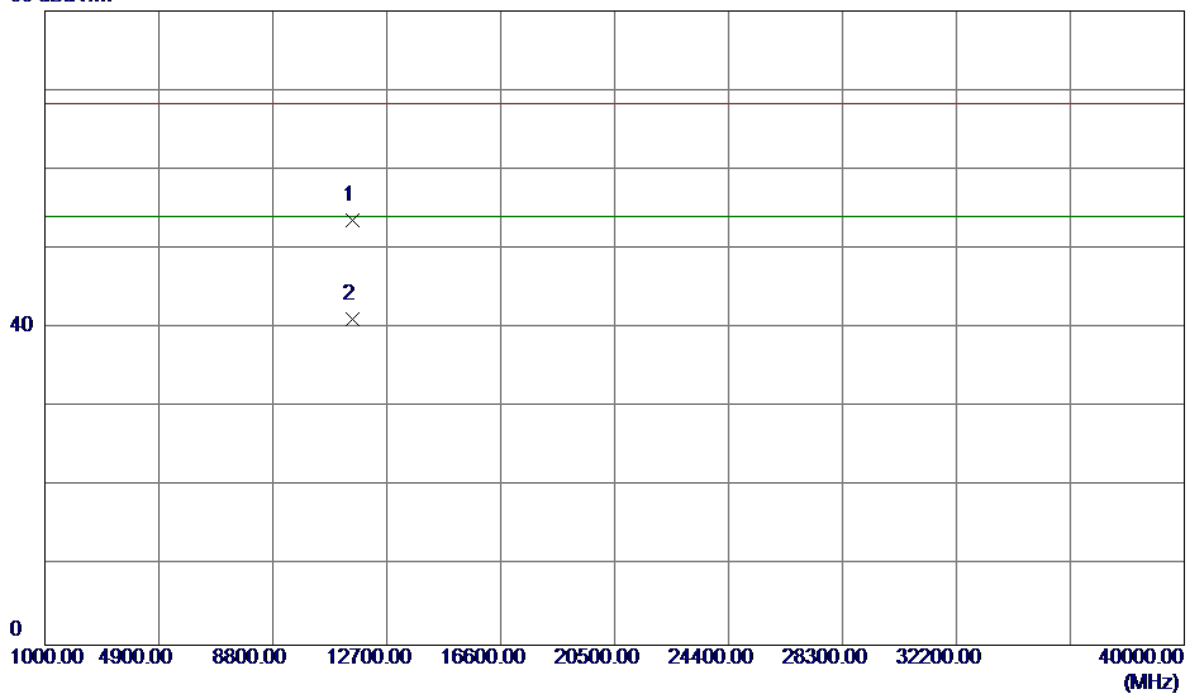

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11550.0000	36.57	17.01	53.58	68.30	-14.72	Peak	
2	11550.1200	24.17	17.01	41.18	54.00	-12.82	AVG	

TX A Mode_DUTY CYCLE

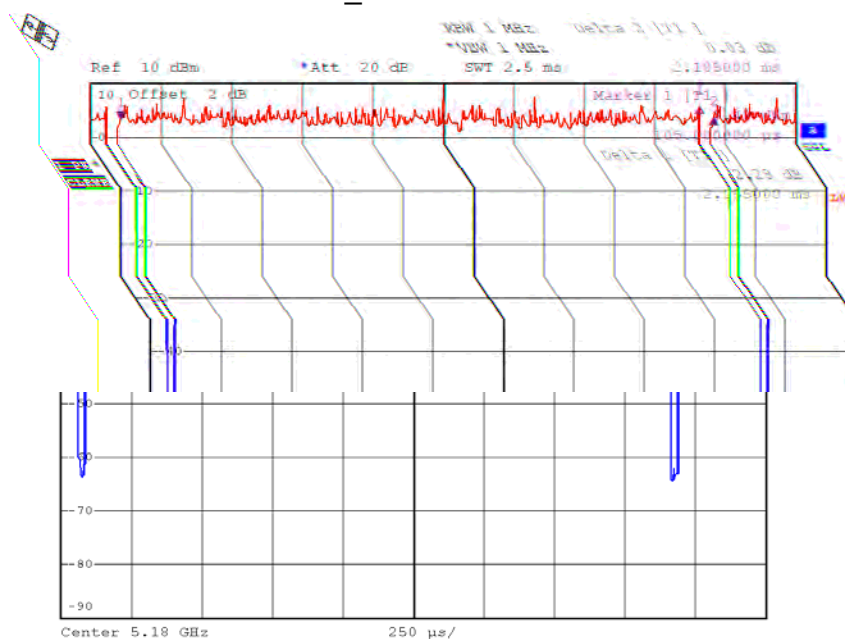

Date: 18.DEC.2015 16:35:10

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 2.06 msec

T_{Total} : 2.11 msec

Duty cycle: 97.63%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.10

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

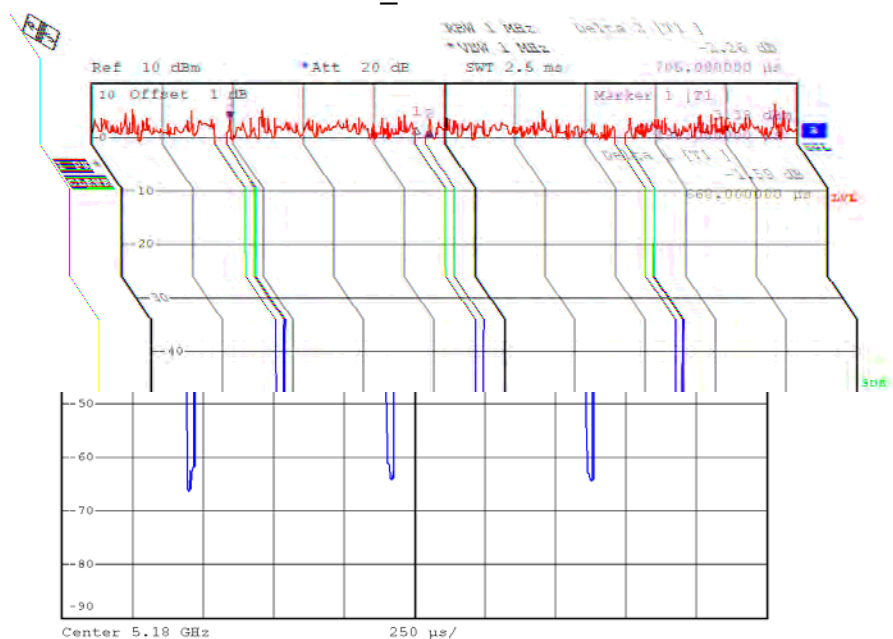

Date: 10.DEC.2015 09:56:32

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 0.66 msec

T_{Total} : 0.70 msec

Duty cycle: 94.29%

Duty Factor = $10 \log(1/\text{Duty cycle})$


Duty Factor = 0.26

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

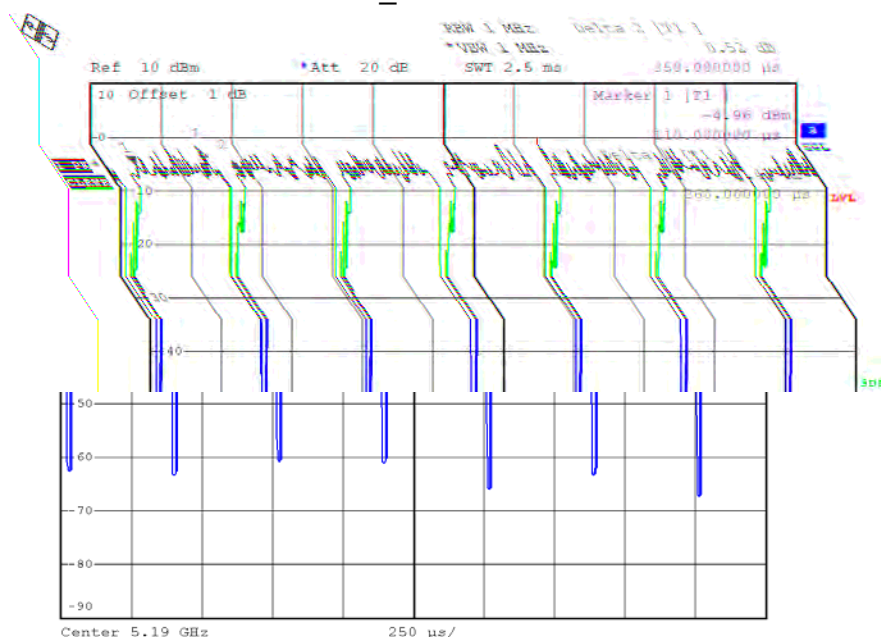

Date: 10.DEC.2015 09:57:31

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 0.26 msec

T_{Total} : 0.35 msec

Duty cycle: 74.29%

Duty Factor = $10 \log(1/\text{Duty cycle})$


Duty Factor = 1.29

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

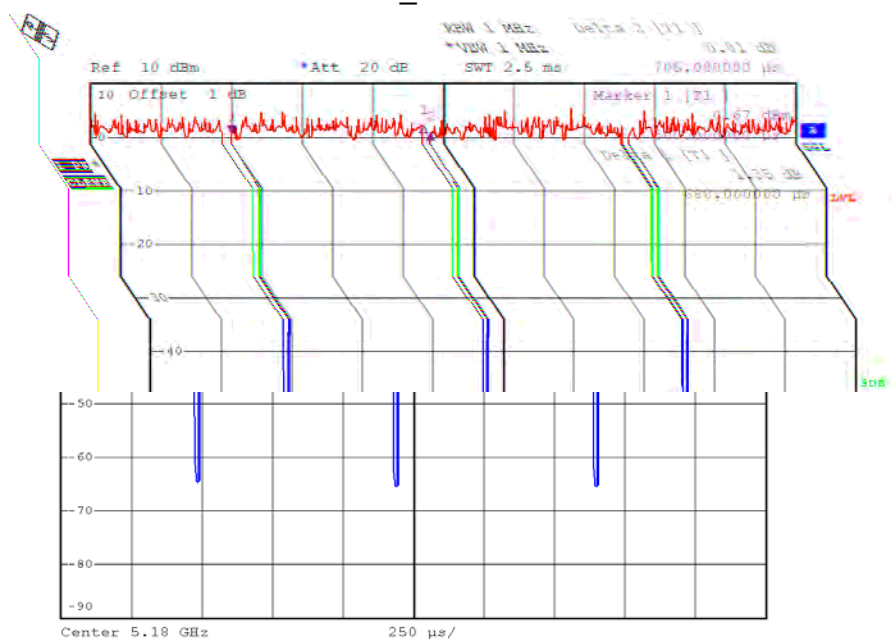

Date: 10.DEC.2015 09:57:05

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.68 msec

T_{Total} : 0.70 msec

Duty cycle: 97.14%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.13

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

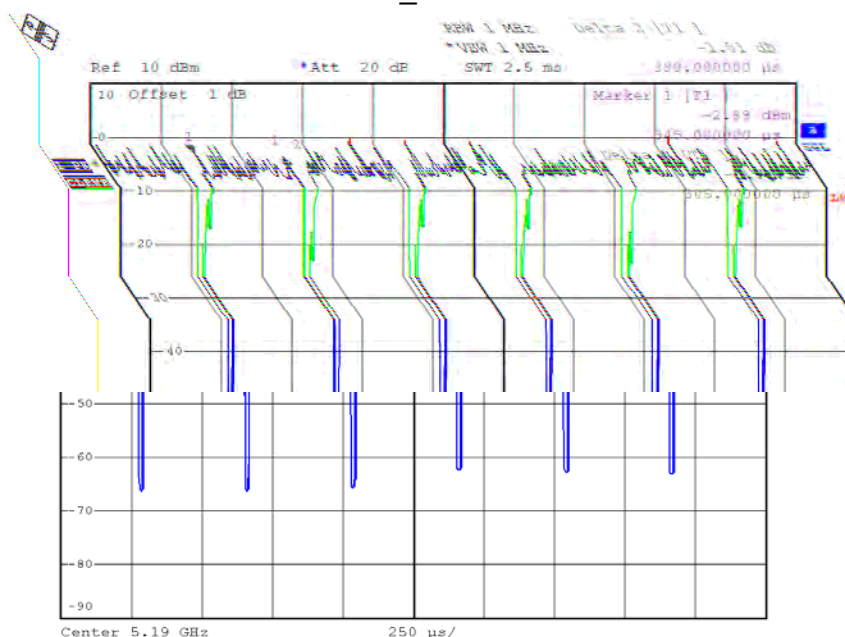

Date: 10.DEC.2015 09:58:13

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 0.30 msec

T_{Total} : 0.38 msec

Duty cycle: 78.95%

Duty Factor = $10 \log(1/\text{Duty cycle})$


Duty Factor = 1.03

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

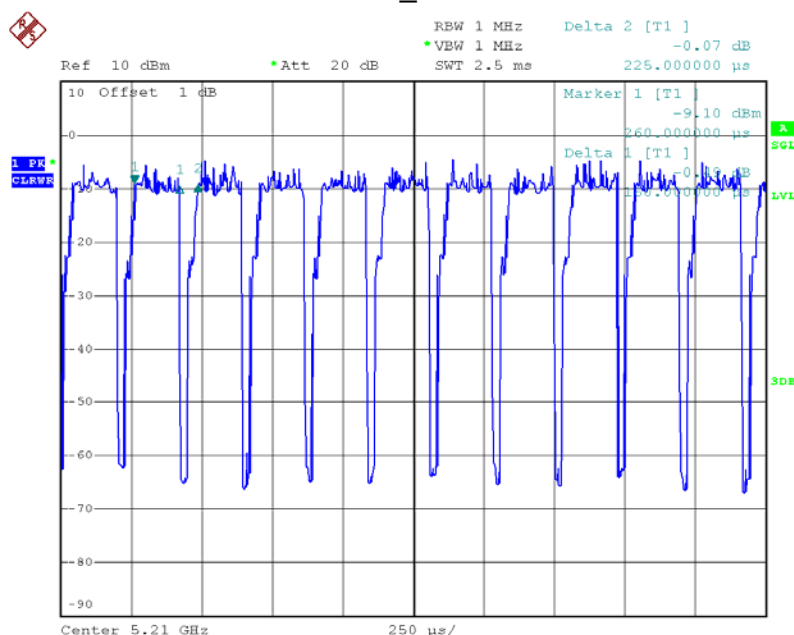

Date: 10.DEC.2015 10:16:53

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 0.16 msec

T_{Total} : 0.22 msec

Duty cycle: 72.73%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 1.38

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor


Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.79	17.10
CH40	5200	20.69	17.10
CH48	5240	28.51	17.30

TX CH36

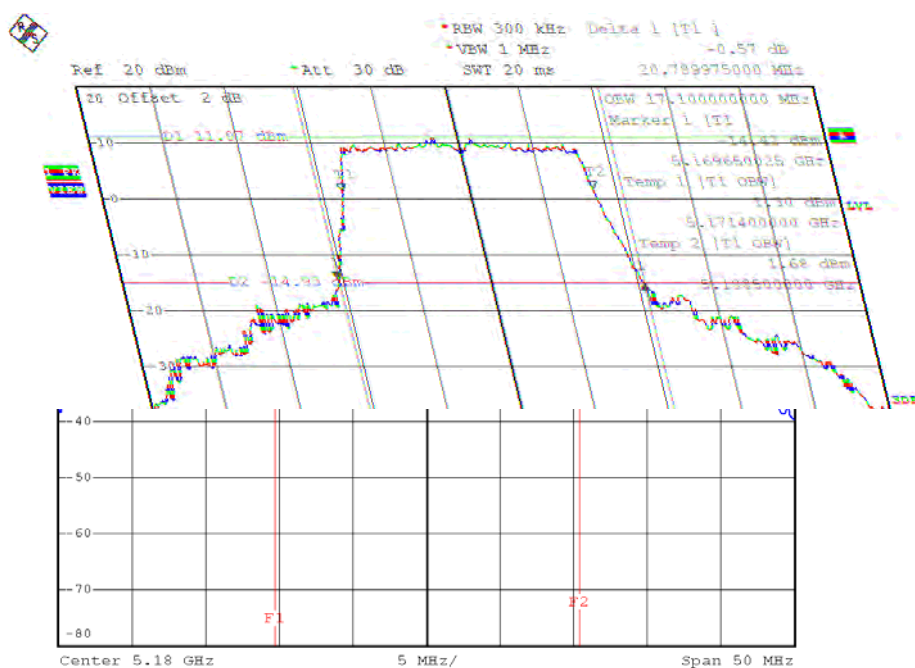


Date: 23.DEC.2015 15:49:34

TX CH40

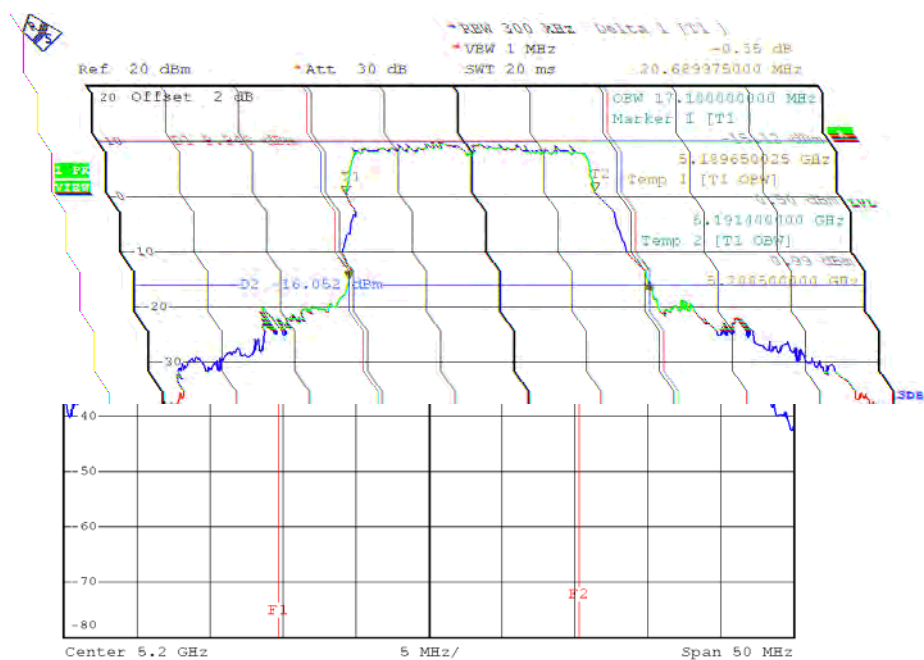

Date: 23.DEC.2015 15:54:20

TX CH48

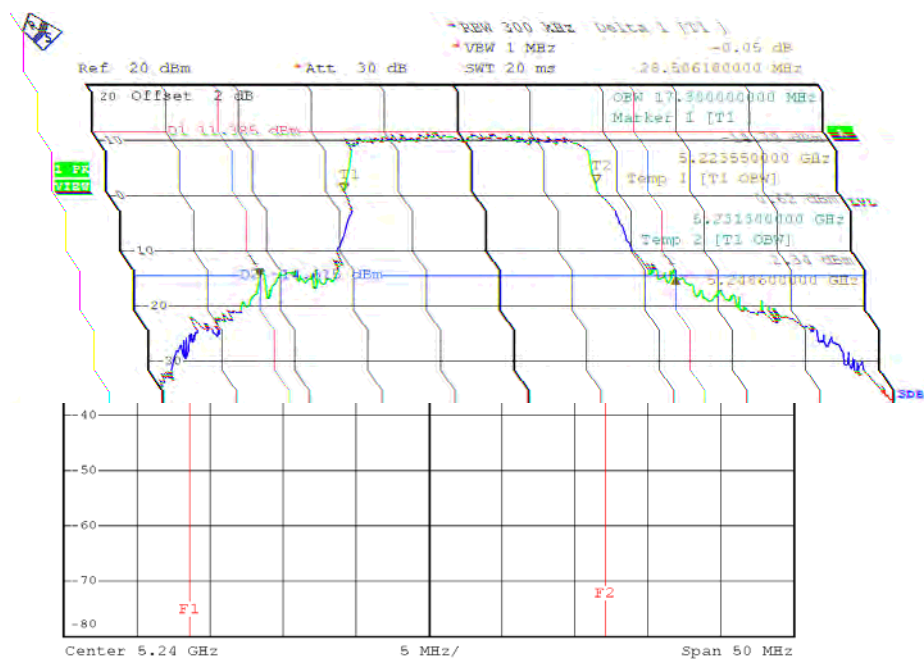


Date: 23.DEC.2015 15:57:30

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.71	18.00
CH40	5200	20.91	18.00
CH48	5240	20.75	18.10

TX CH36

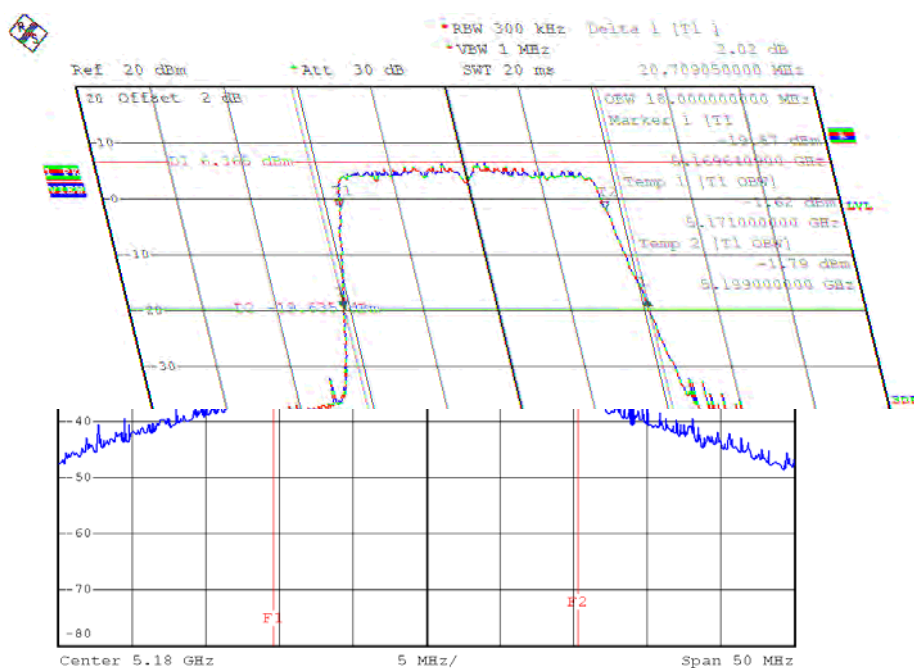


Date: 23.DEC.2015 16:18:01

TX CH40

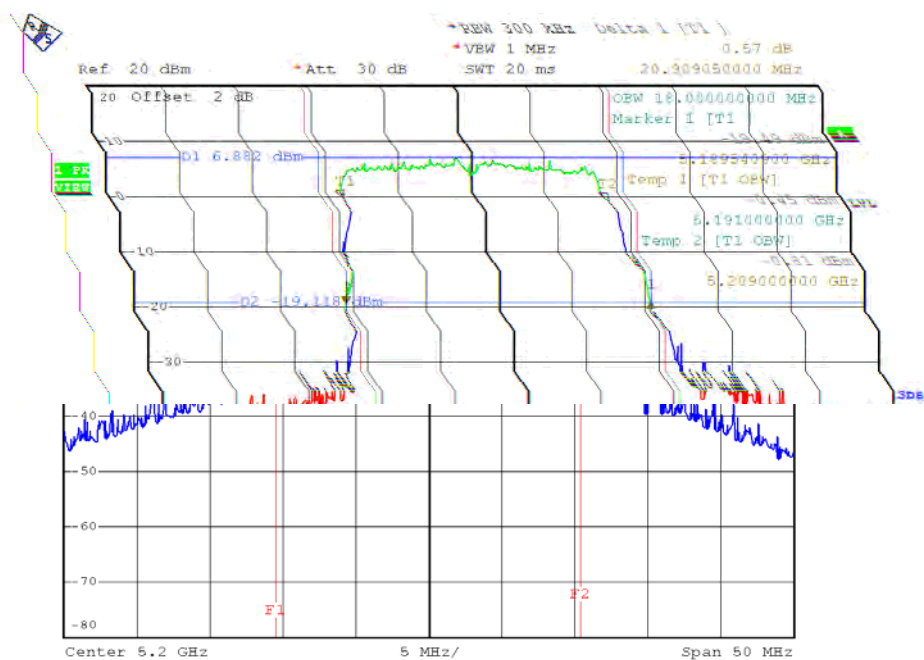

Date: 23.DEC.2015 16:18:55

TX CH48

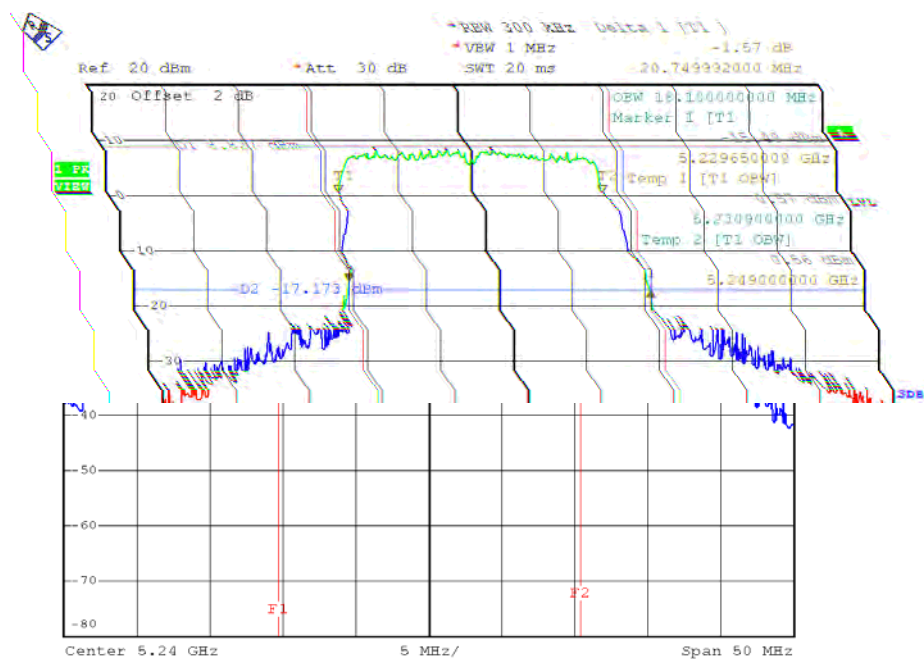


Date: 23.DEC.2015 16:20:03

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	39.90	36.40
CH46	5230	39.80	36.40

TX CH38

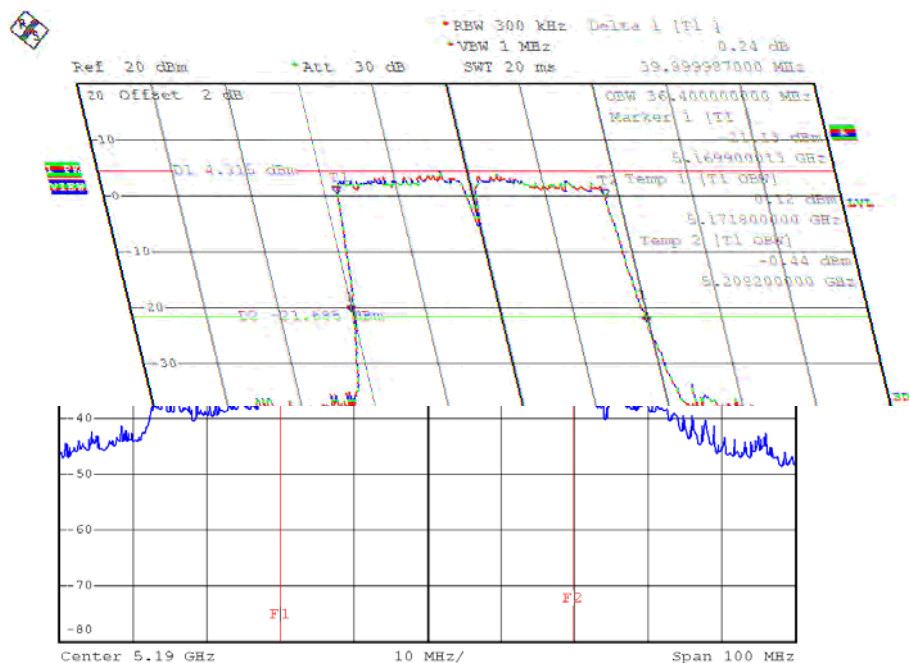

Date: 23.DEC.2015 16:50:03

TX CH46

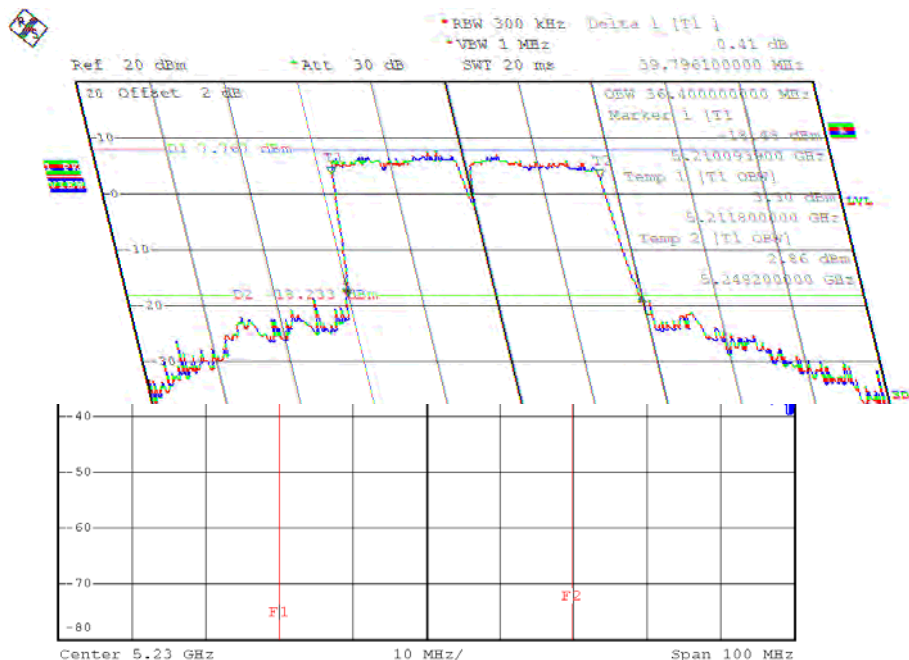


Date: 23.DEC.2015 16:51:13

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.66	17.10
CH60	5300	21.49	17.20
CH64	5320	20.65	17.00

TX CH52

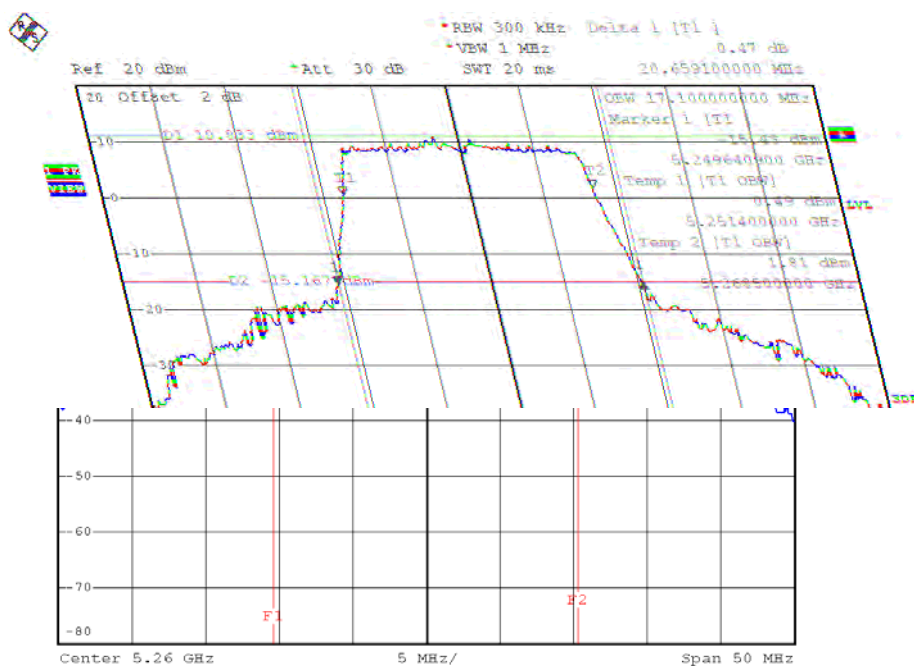


Date: 23.DEC.2015 15:59:14

TX CH60

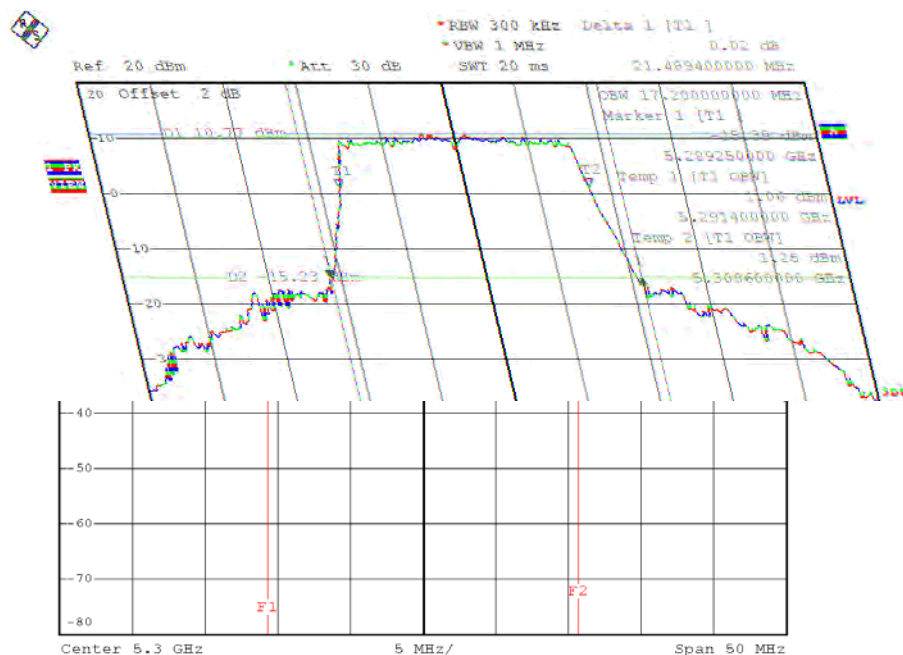

Date: 23.DEC.2015 16:02:16

TX CH64

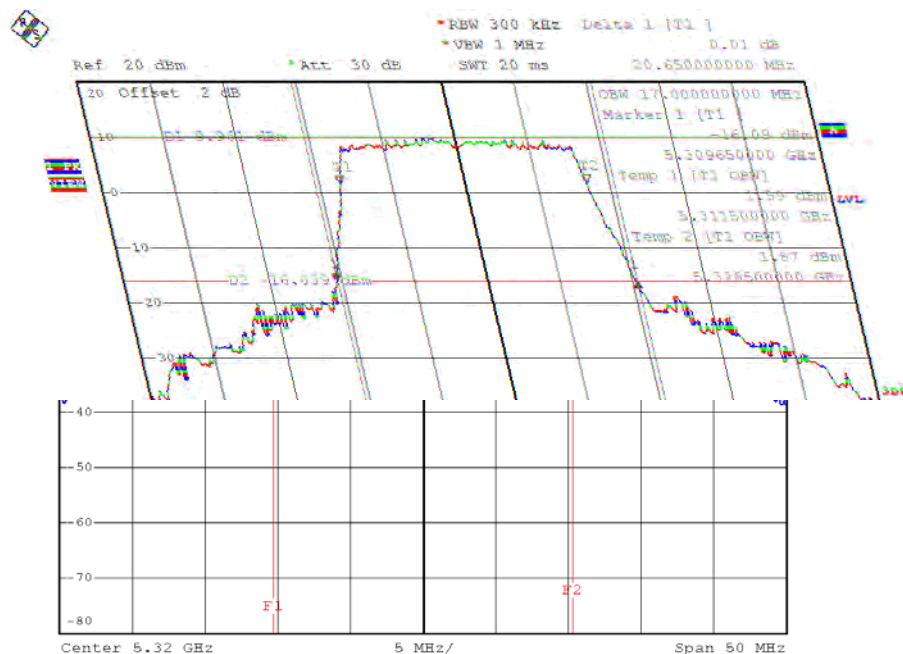


Date: 23.DEC.2015 16:03:05

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.85	18.00
CH60	5300	20.95	18.00
CH64	5320	20.79	18.00

TX CH52

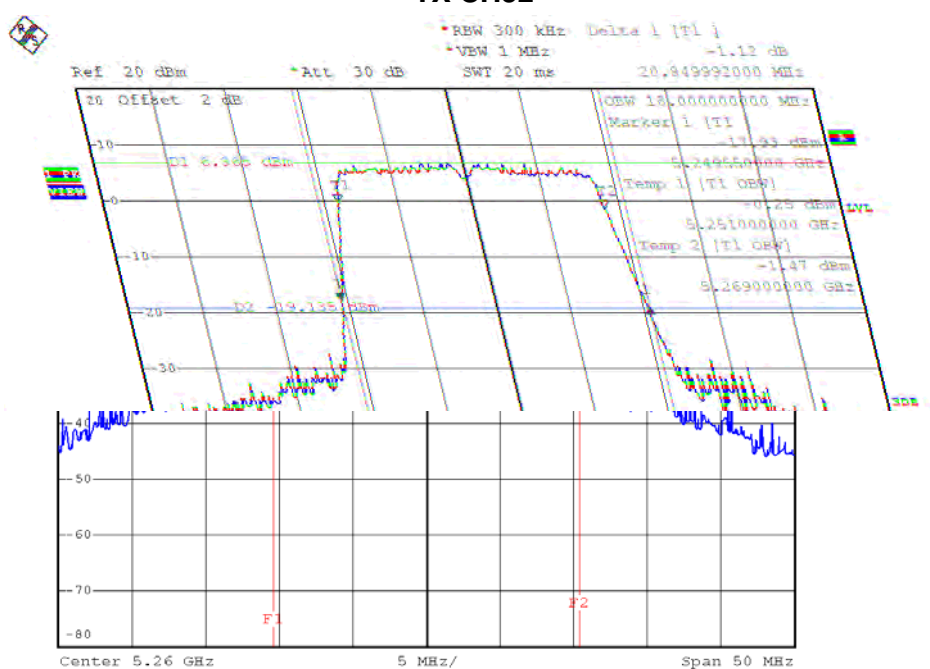


Date: 23.DEC.2015 16:21:02

TX CH60

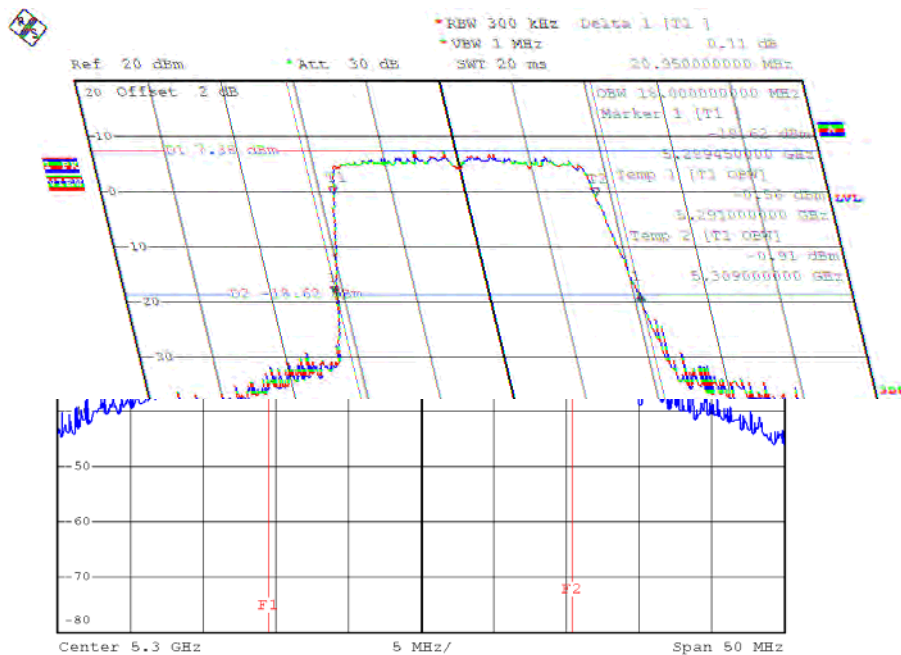

Date: 23.DEC.2015 16:21:50

TX CH64

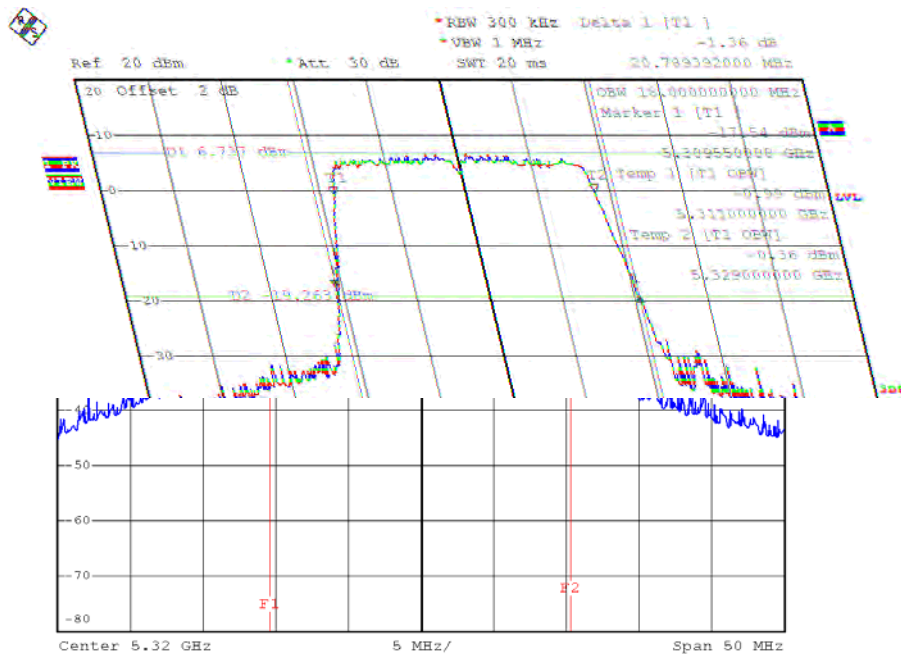


Date: 23.DEC.2015 16:22:41

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.30	36.40
CH62	5310	39.80	36.40

TX CH54

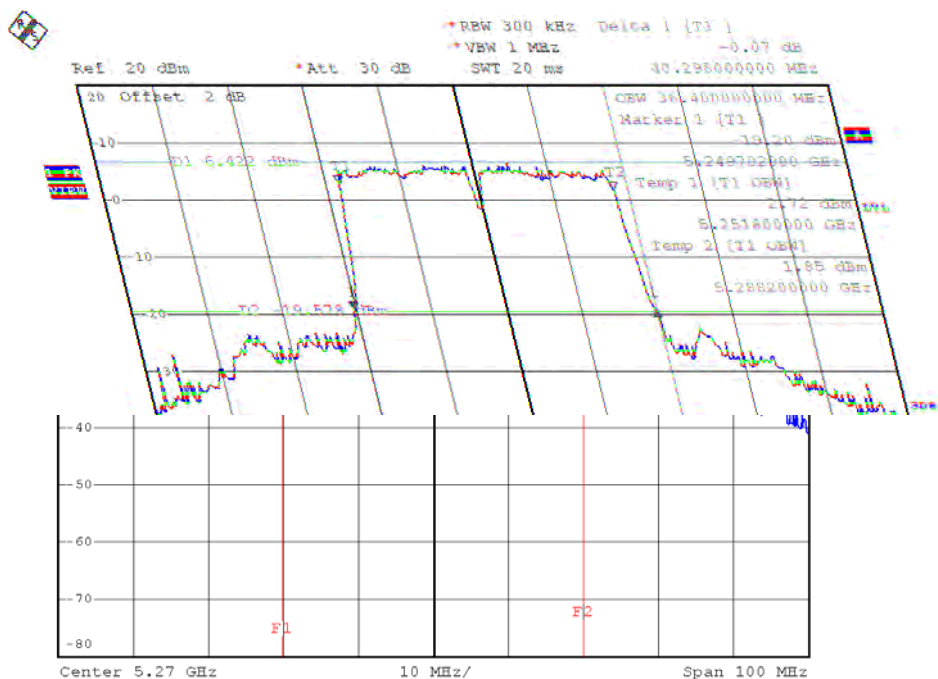

Date: 23.DEC.2015 16:52:19

TX CH62

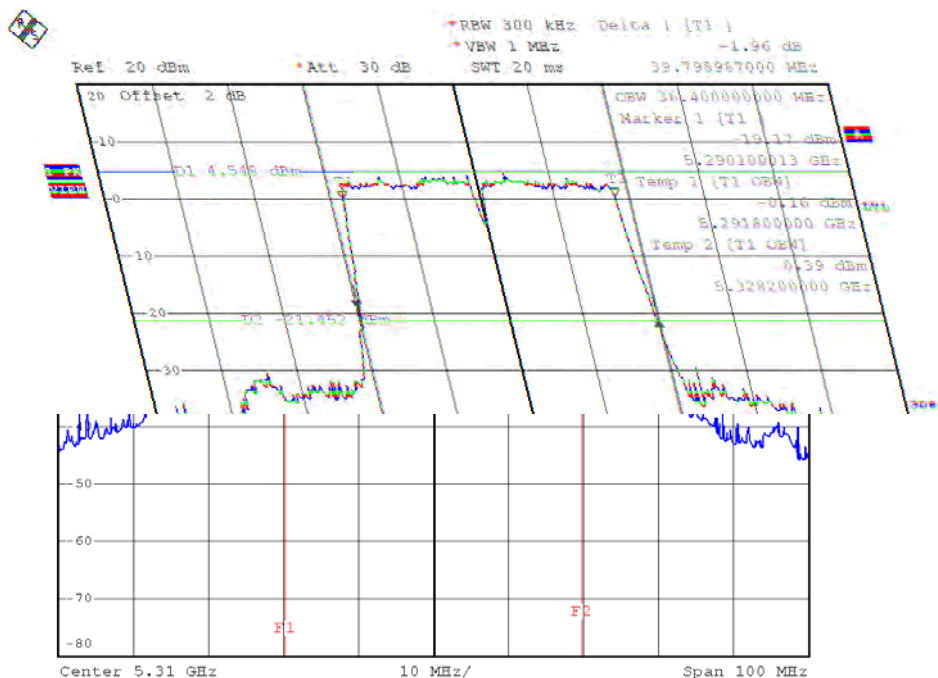


Date: 23.DEC.2015 16:53:25

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.80	17.10
CH116	5580	25.99	17.20
CH140	5700	20.55	17.00

TX CH100

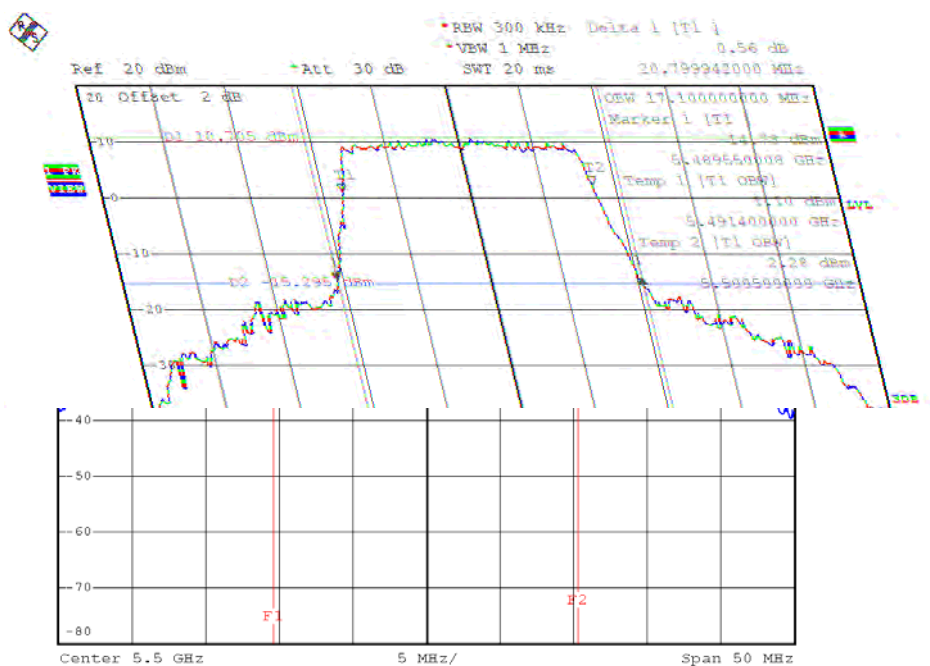


Date: 23.DEC.2015 16:03:53

TX CH116

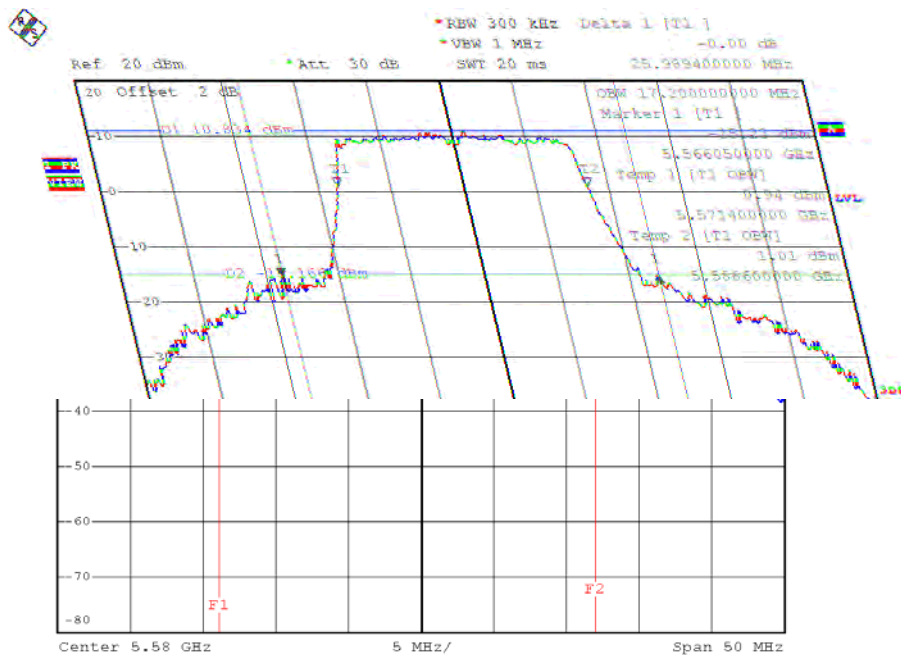

Date: 23.DEC.2015 16:06:26

TX CH140

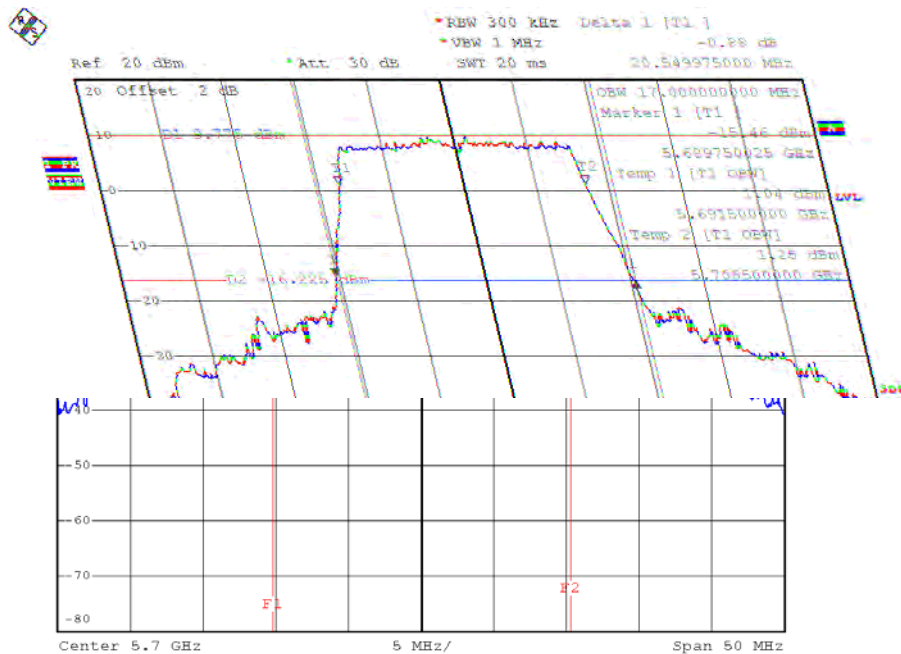


Date: 23.DEC.2015 16:07:49

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.80	18.00
CH116	5580	21.00	18.10
CH140	5700	20.89	18.00

TX CH100

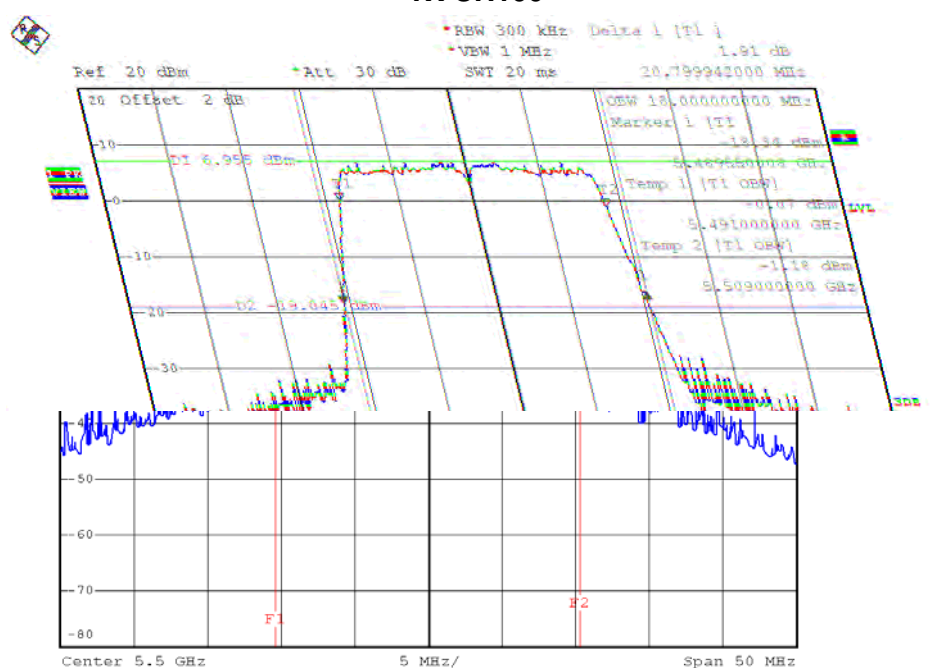


Date: 23.DEC.2015 16:23:31

TX CH116

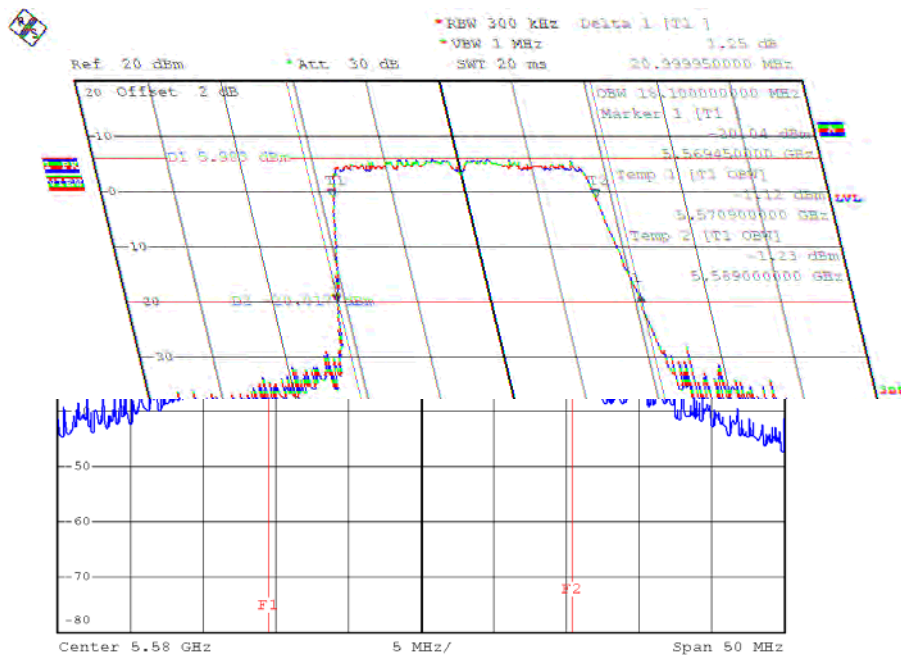

Date: 23.DEC.2015 16:24:23

TX CH140

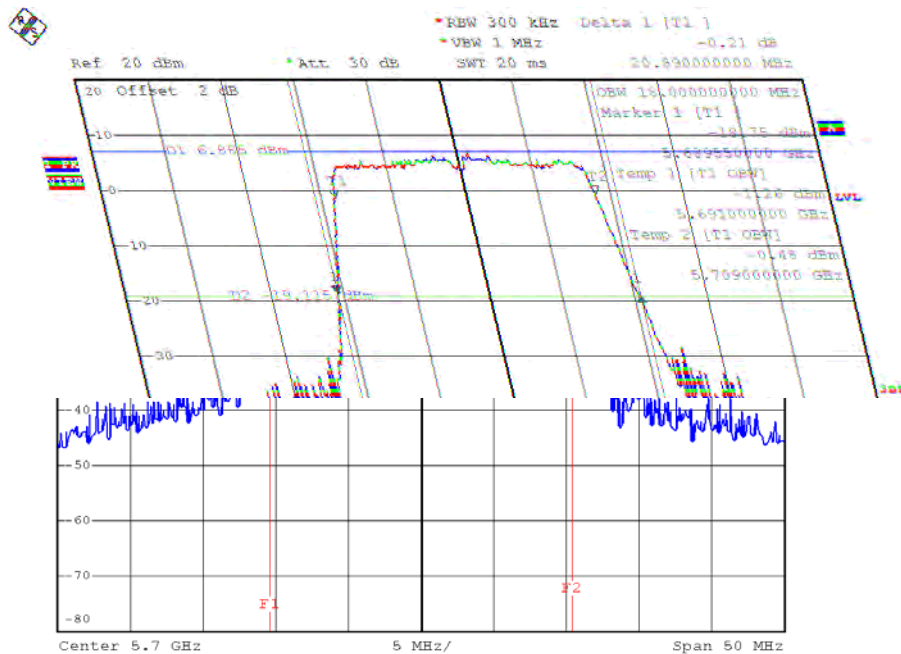


Date: 23.DEC.2015 16:25:17

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	39.70	36.40
CH110	5550	40.10	36.40
CH134	5670	40.10	36.40

TX CH102

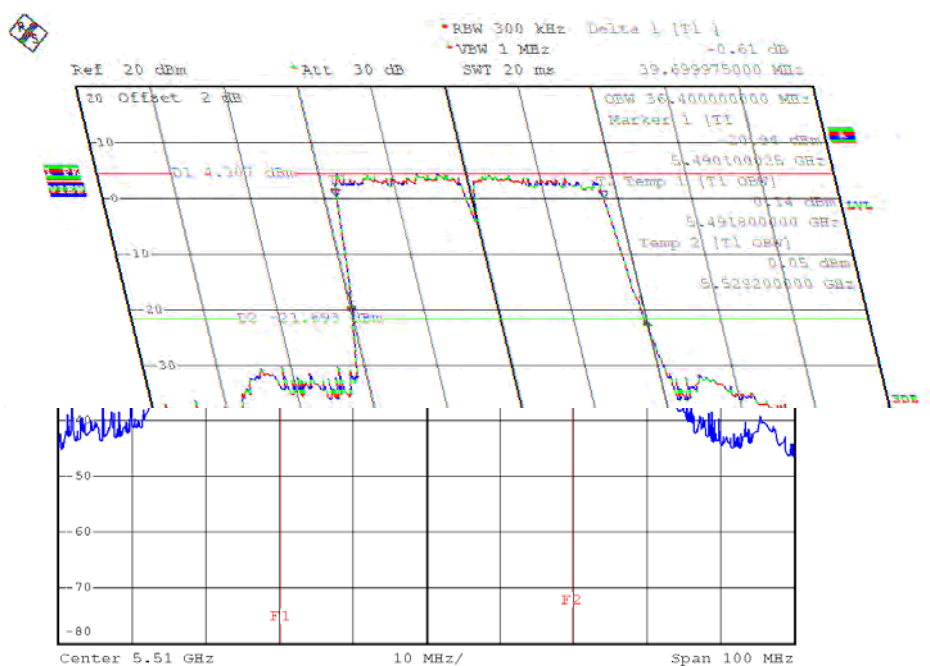


Date: 23.DEC.2015 16:54:17

TX CH110

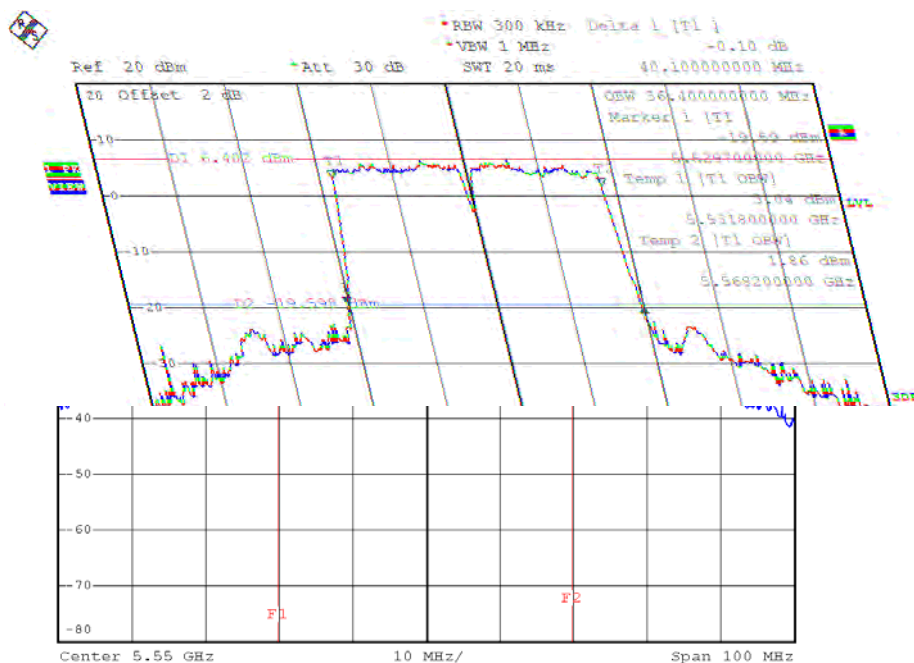

Date: 23.DEC.2015 16:55:06

TX CH134

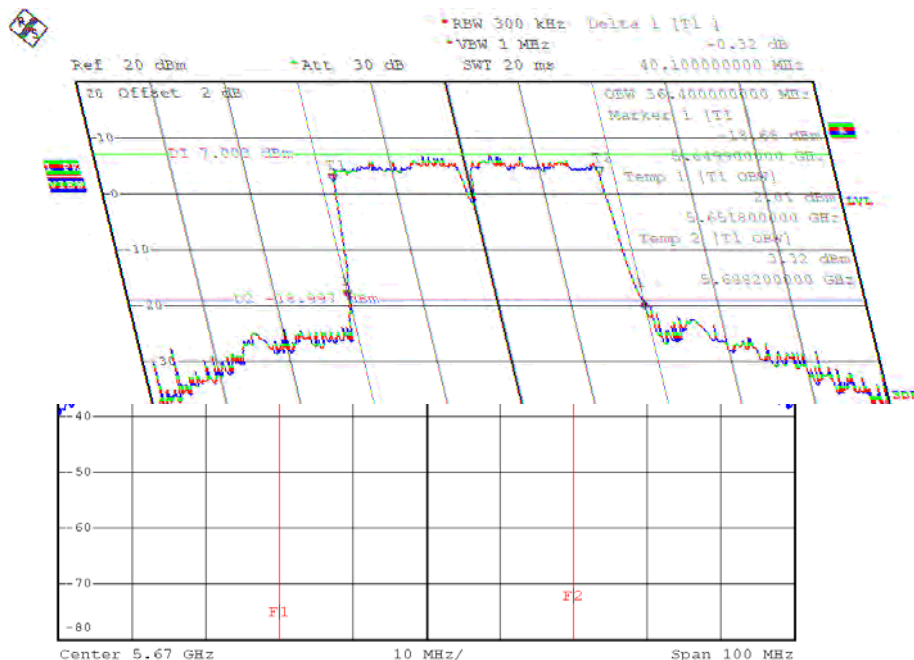


Date: 23.DEC.2015 16:56:03

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.45	16.60	>=500
CH157	5785	16.45	28.50	>=500
CH165	5825	16.45	16.60	>=500

TX CH 149

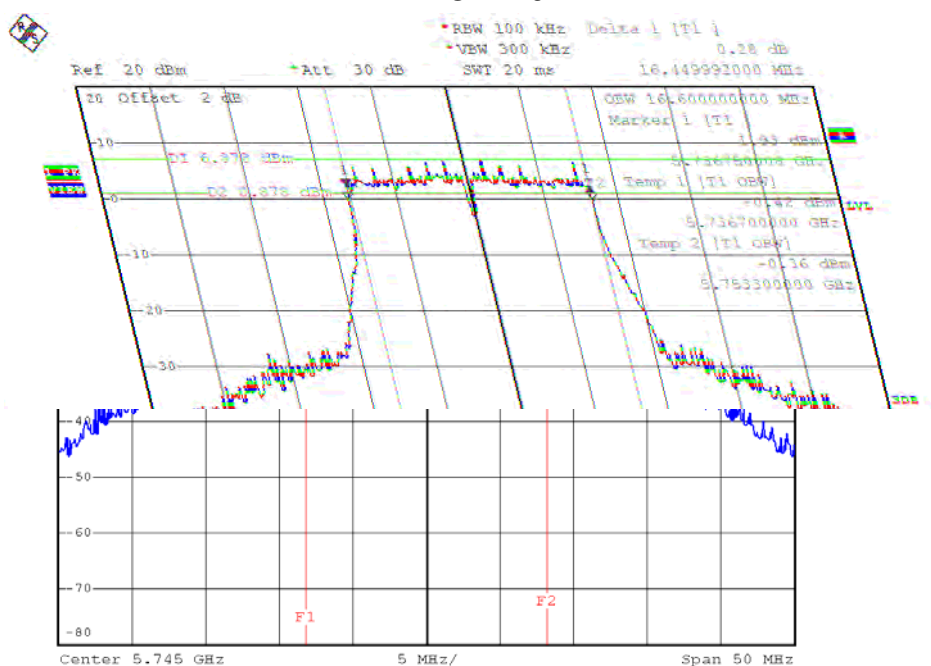


Date: 23.DEC.2015 16:10:31

TX CH 157

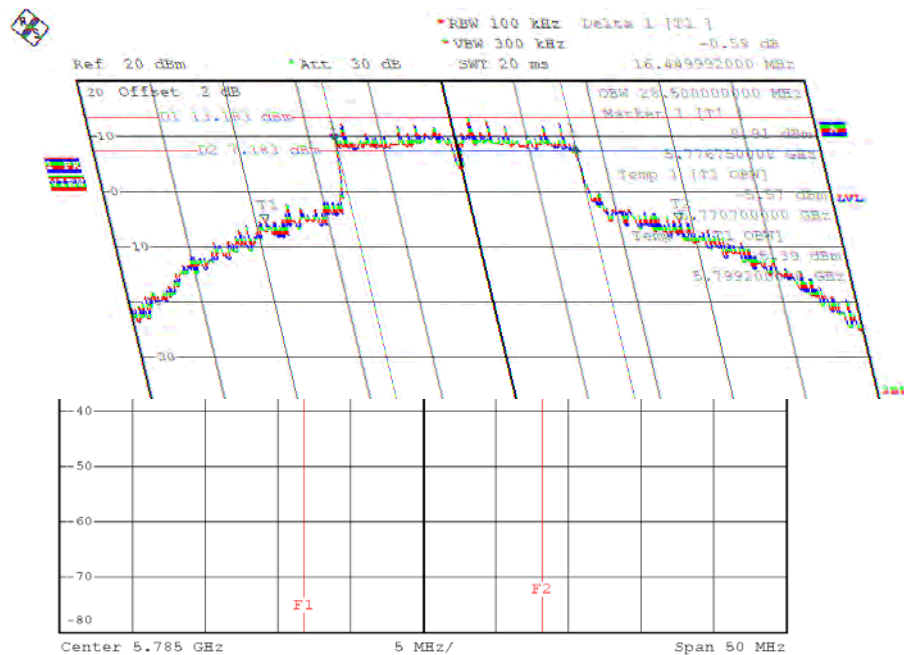

Date: 23.DEC.2015 16:15:24

TX CH 165

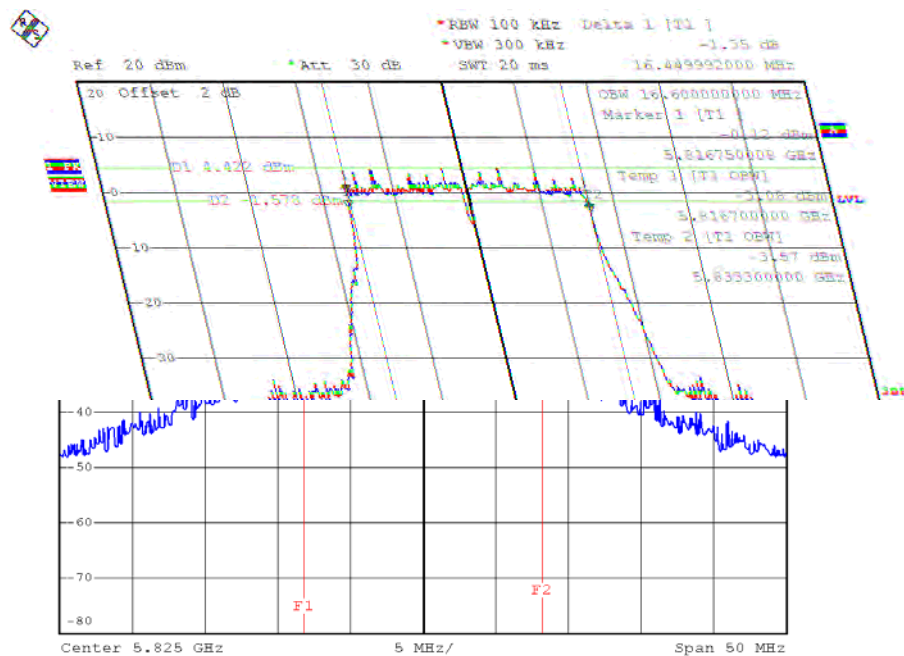


Date: 23.DEC.2015 16:16:44

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.70	17.70	>=500
CH157	5785	17.65	24.80	>=500
CH165	5825	17.65	17.60	>=500

TX CH 149

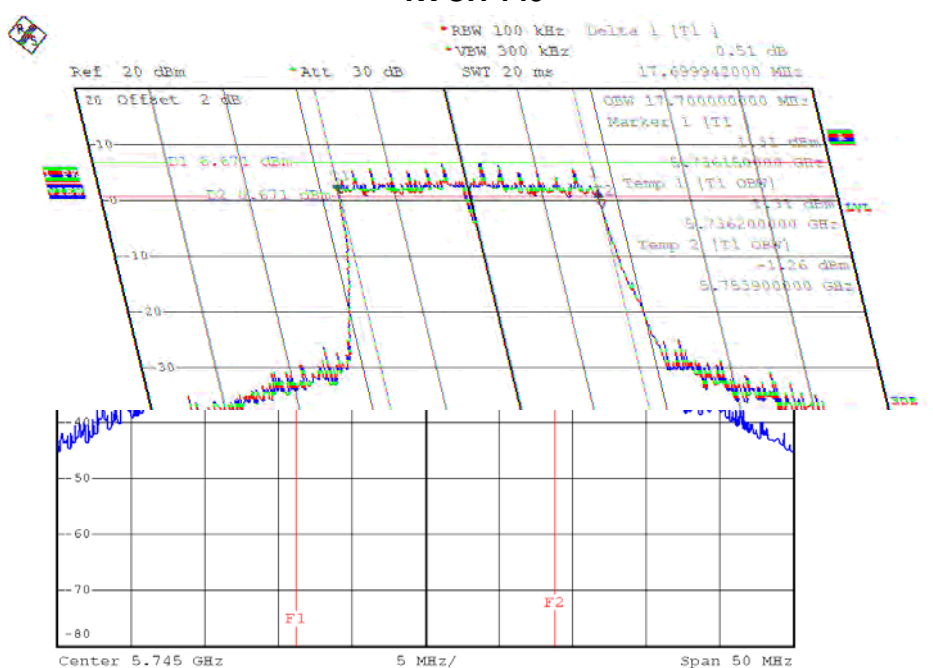


Date: 23.DEC.2015 16:29:09

TX CH 157

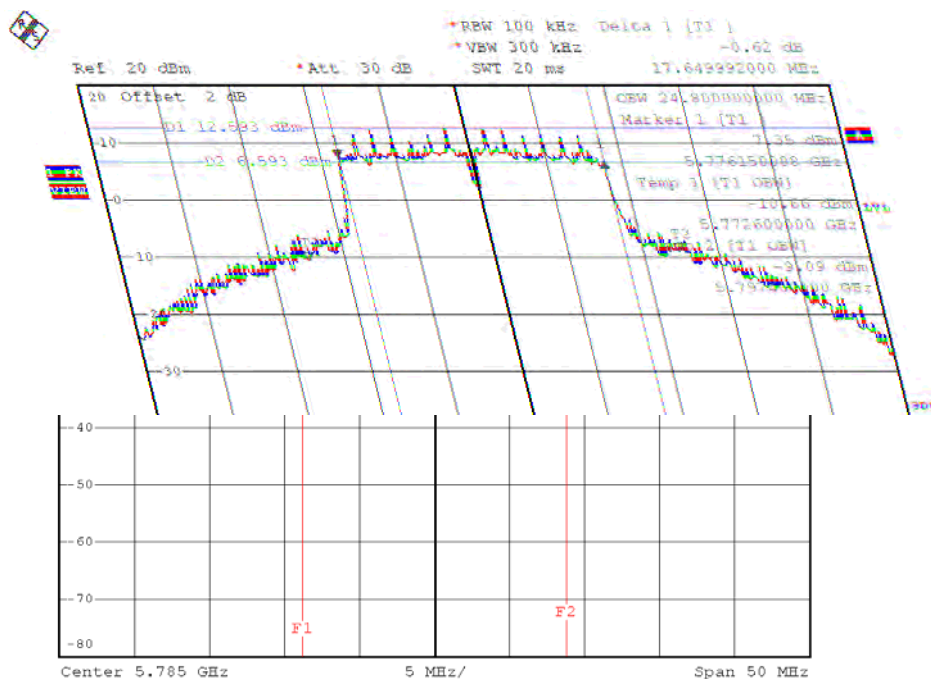

Date: 23.DEC.2015 16:30:34

TX CH 165

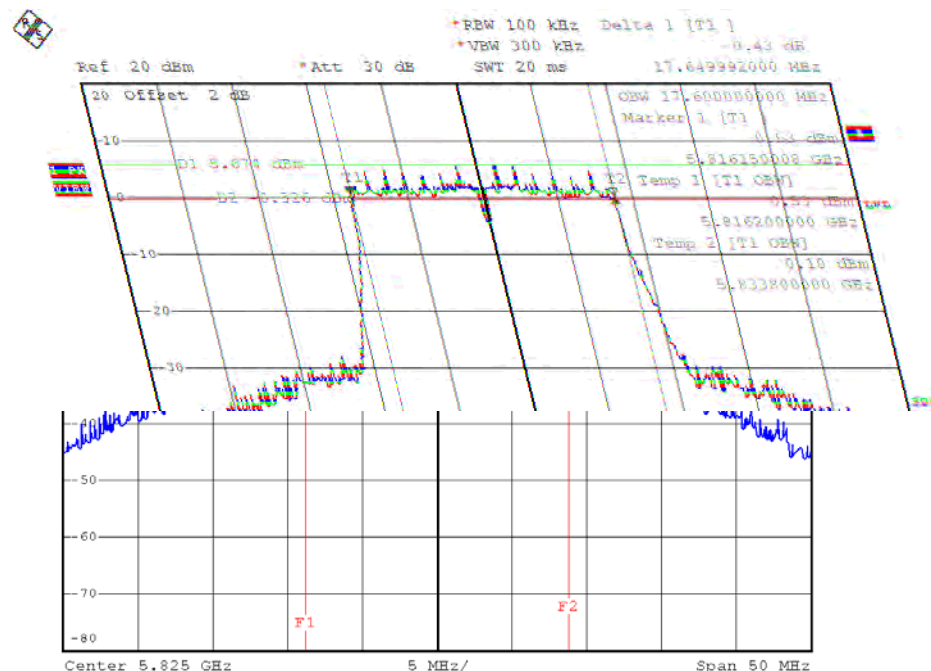


Date: 23.DEC.2015 16:31:40

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	≥ 500
CH159	5795	36.50	36.40	≥ 500

TX CH 151

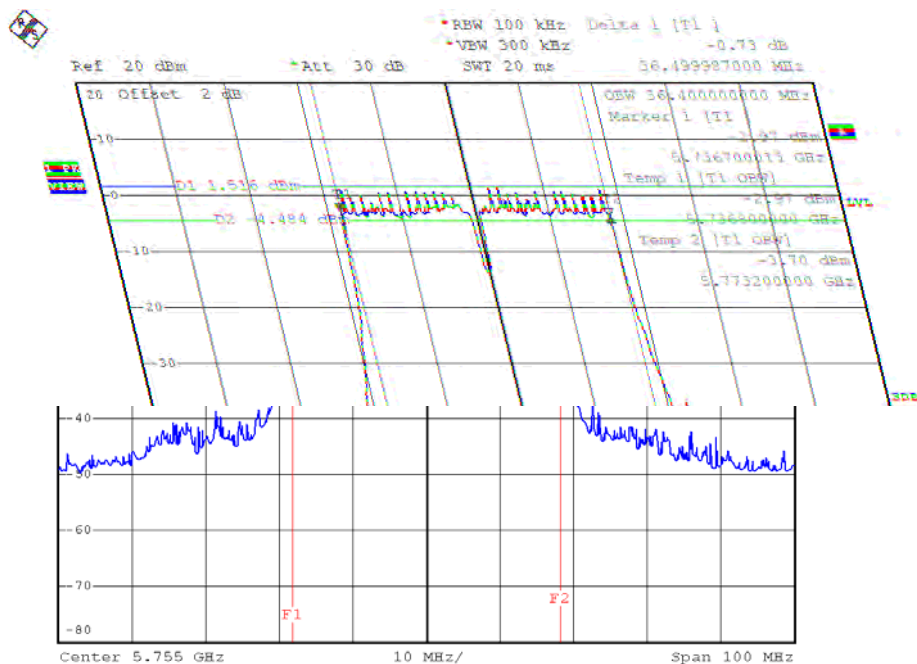

Date: 23.DEC.2015 16:56:58

TX CH 159

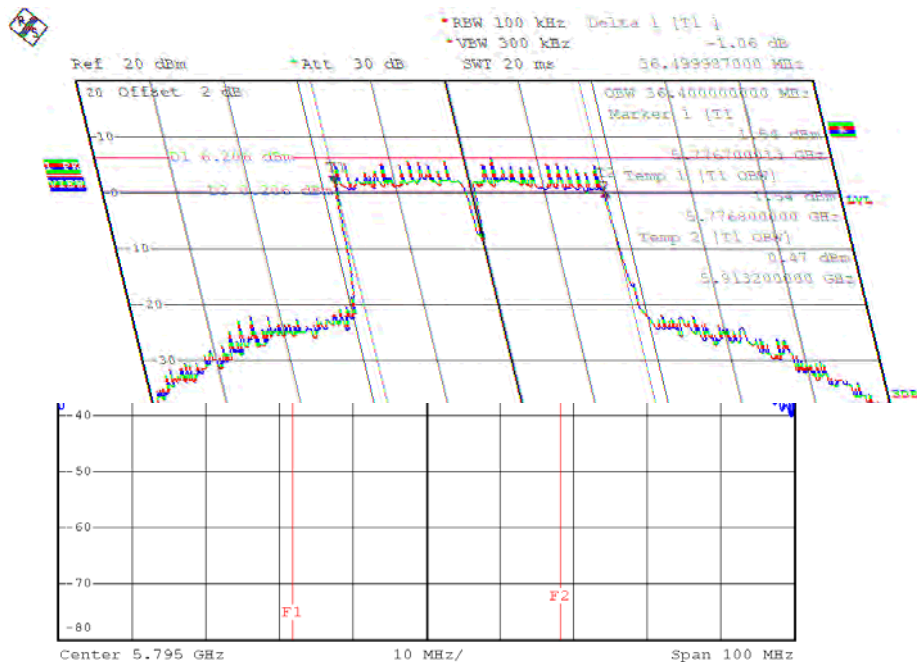


Date: 23.DEC.2015 16:57:53

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.89	18.00
CH40	5200	20.89	18.00
CH48	5240	36.15	18.60

TX CH36

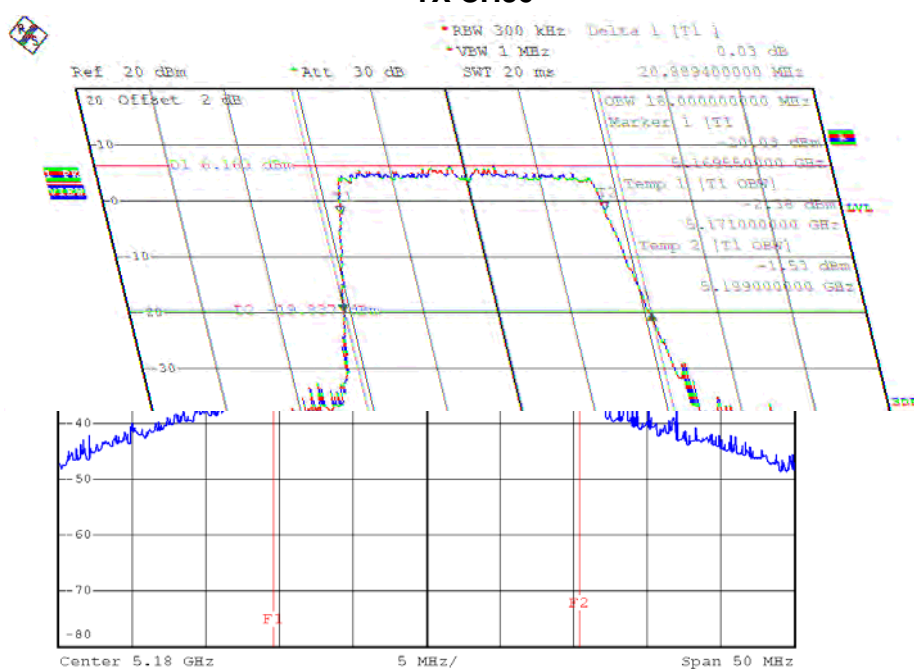


Date: 23.DEC.2015 16:32:45

TX CH40

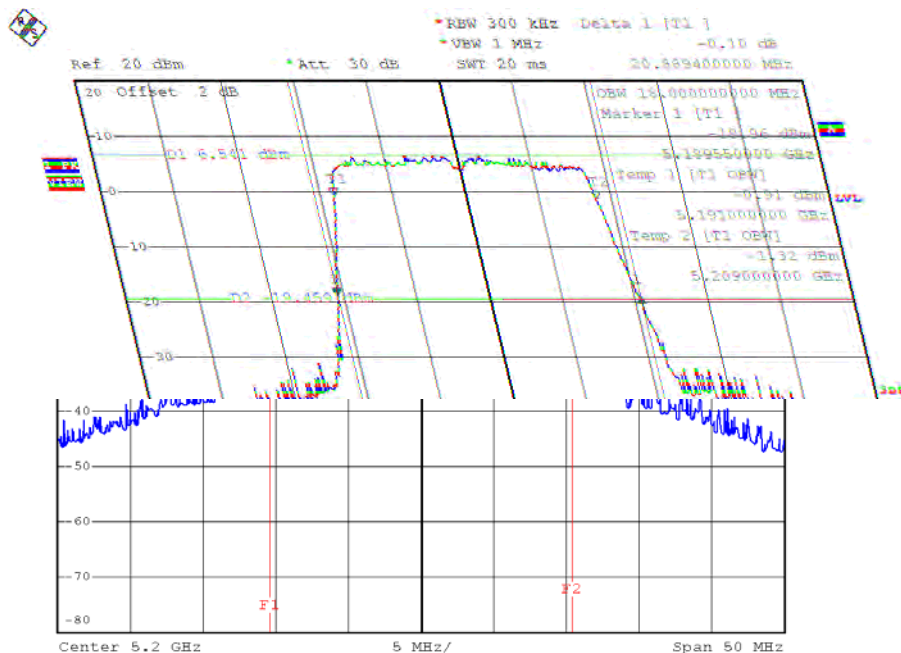

Date: 23.DEC.2015 16:33:37

TX CH48

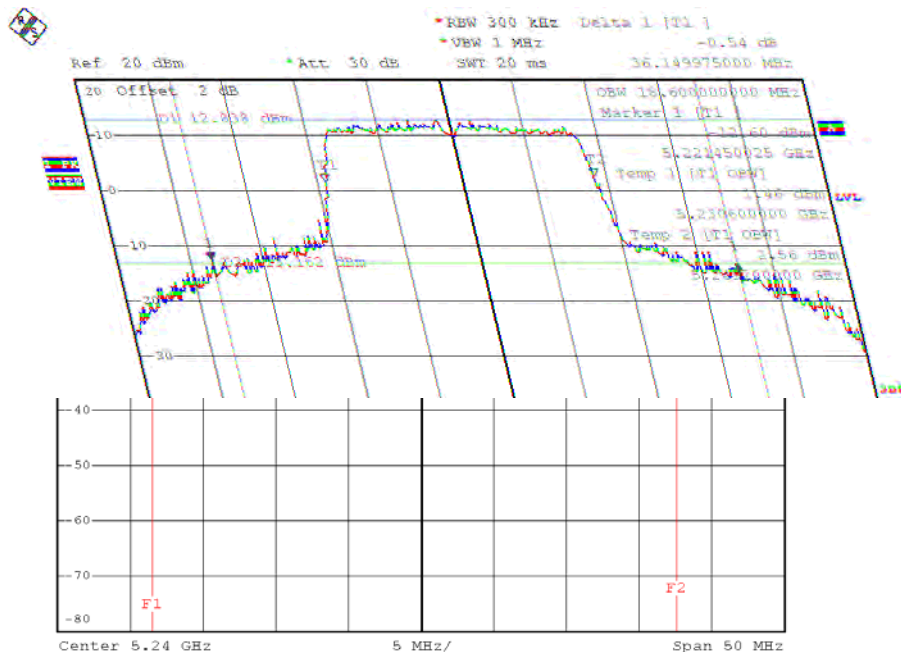

Date: 23.DEC.2015 16:34:54


Test Mode: UNII-1/TX AC40 Mode_CH38/CH46

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	39.80	36.40
CH46	5230	45.39	36.40

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	81.40	76.00

TX CH42

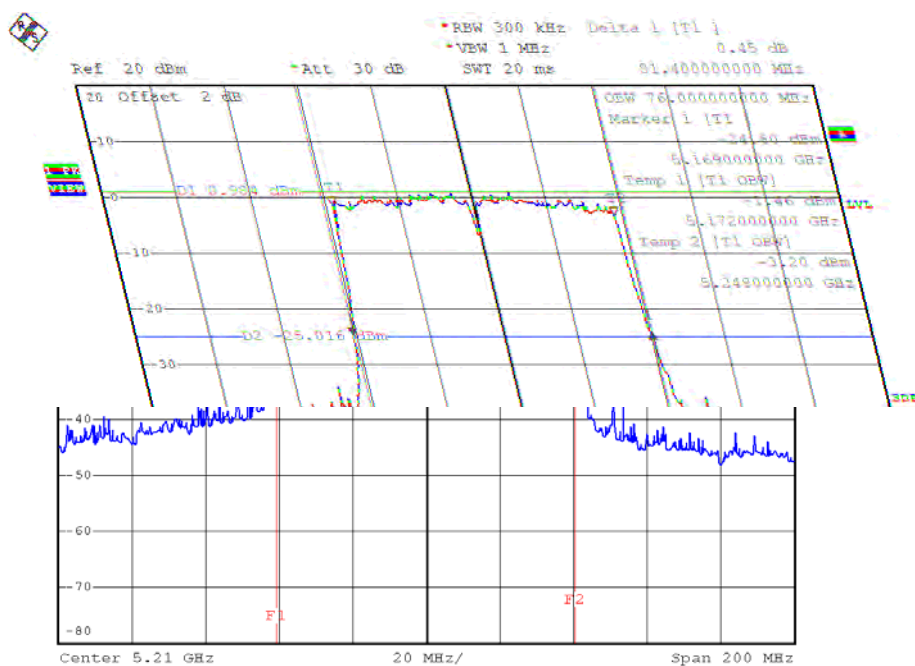


Date: 29.DEC.2015 11:07:46

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.80	18.00
CH60	5300	20.85	18.10
CH64	5320	20.90	18.00

TX CH52

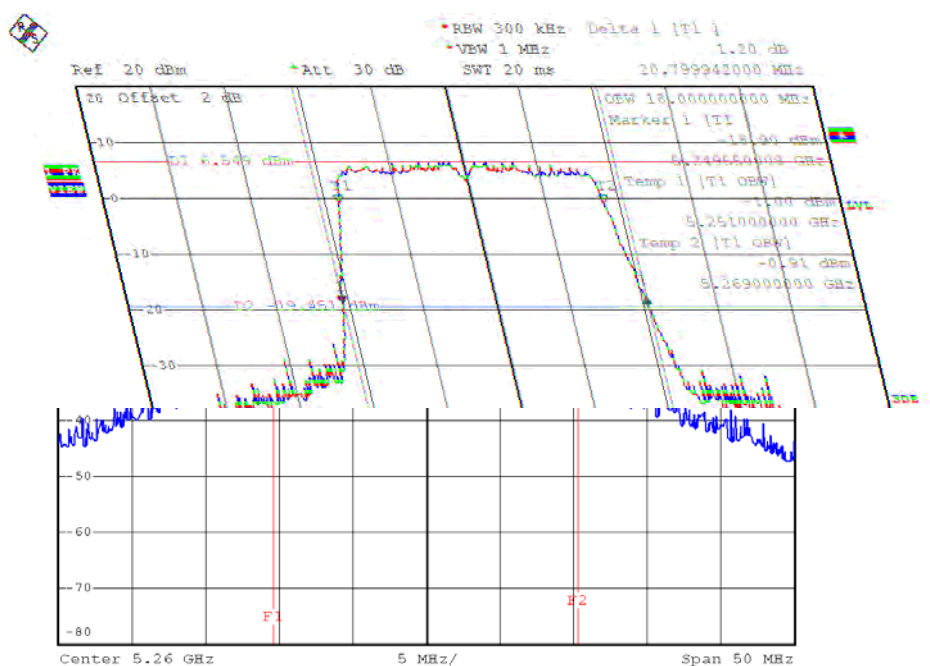


Date: 23.DEC.2015 16:37:34

TX CH60

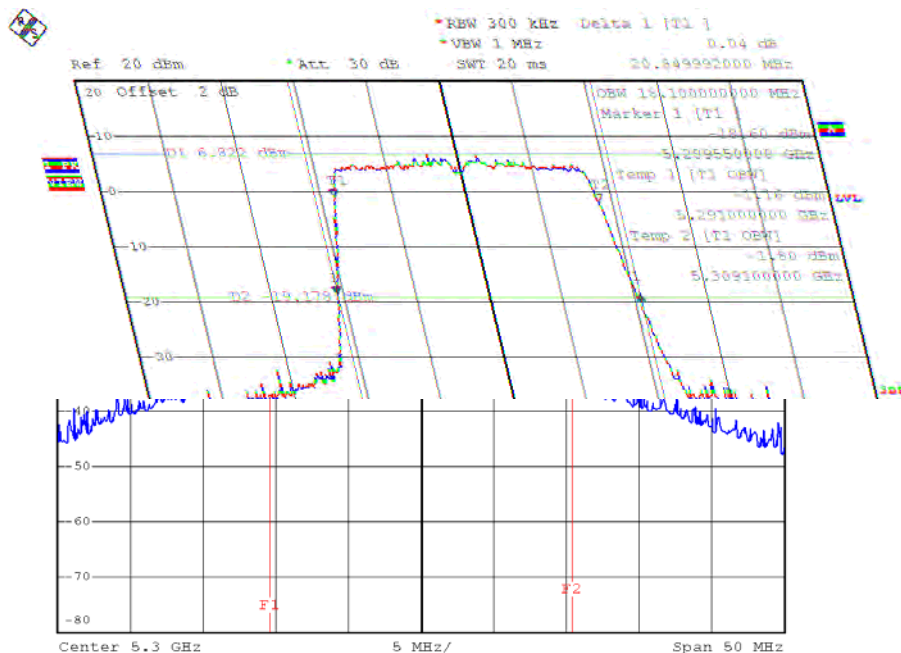

Date: 23.DEC.2015 16:38:32

TX CH64

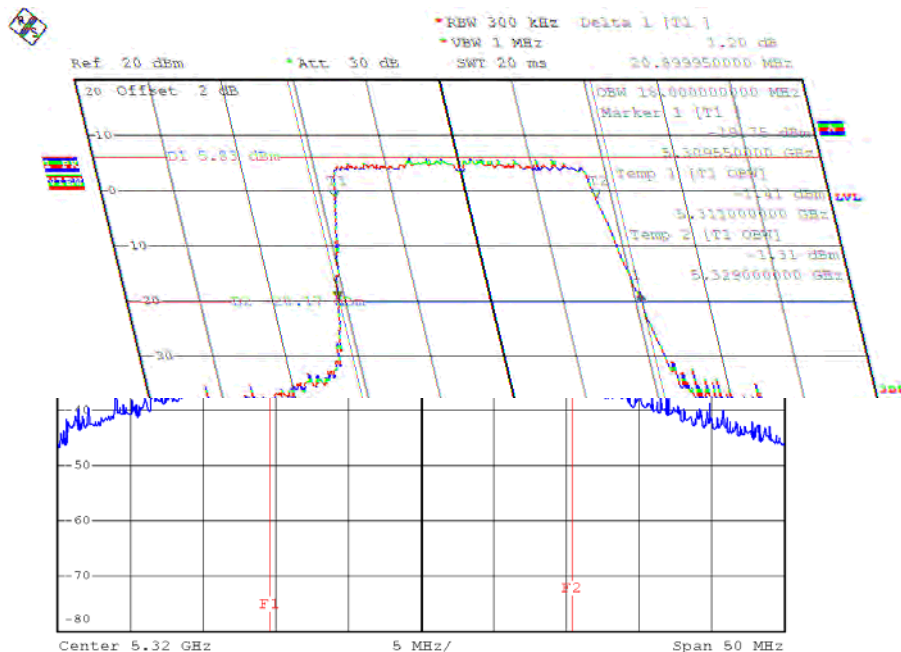


Date: 23.DEC.2015 16:39:28

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	45.19	36.40
CH62	5310	40.00	36.40

TX CH54

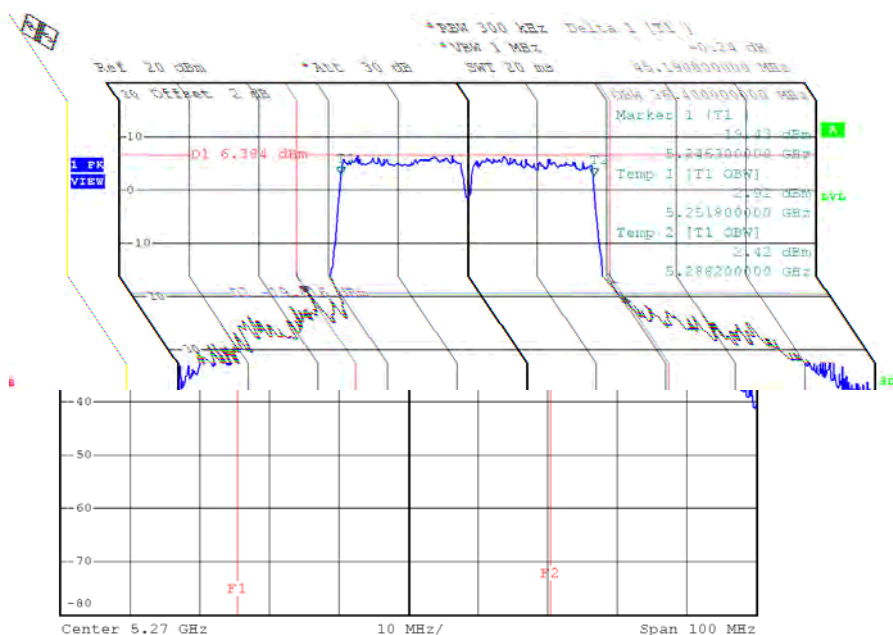

Date: 23.DEC.2015 17:00:44

TX CH62

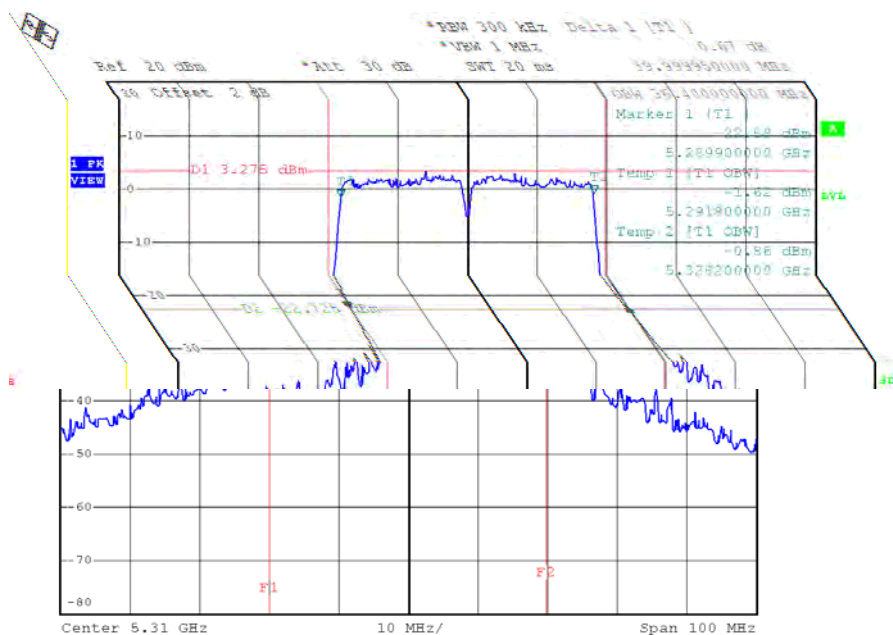


Date: 23.DEC.2015 17:03:05

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	81.01	76.00

TX CH58

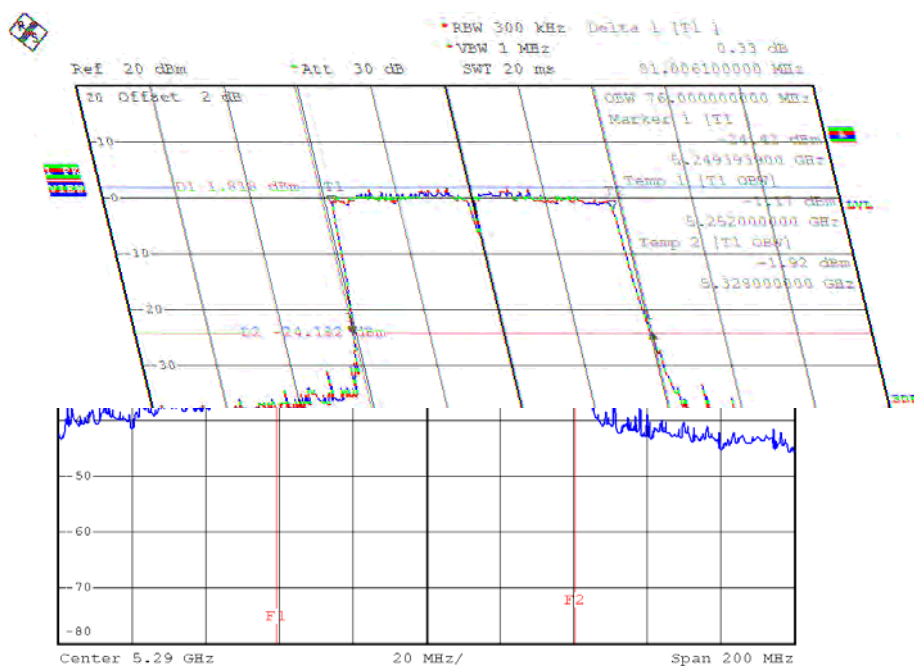


Date: 29.DEC.2015 11:08:50

Test Mode: UNII-2C/TX AC20 Mode CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.85	18.00
CH116	5580	20.95	18.00
CH140	5700	20.85	18.00

TX CH100

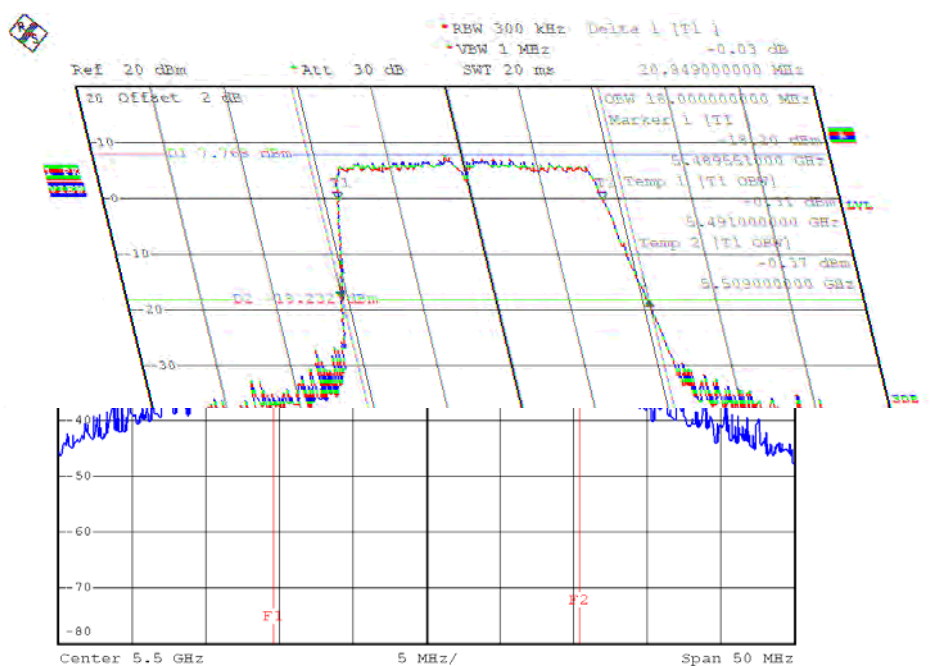


Date: 23.DEC.2015 16:42:54

TX CH116

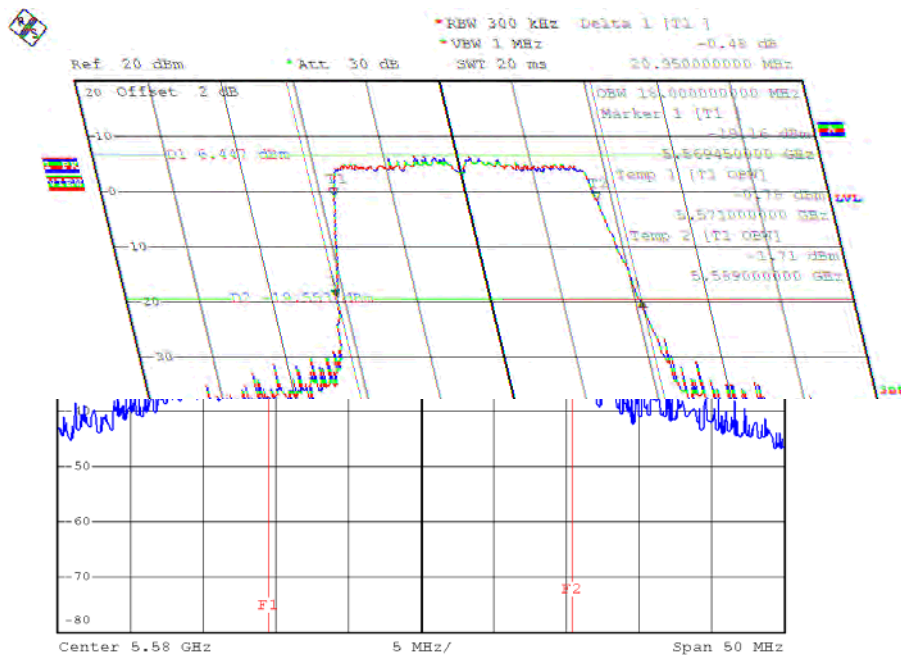

Date: 23.DEC.2015 16:44:14

TX CH140

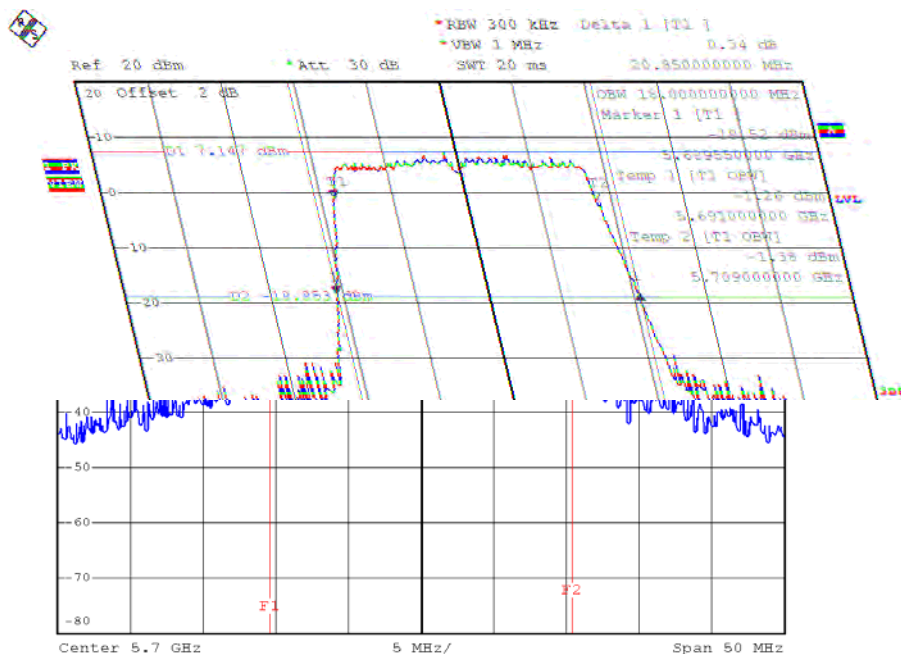


Date: 23.DEC.2015 16:45:22

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	39.79	36.40
CH110	5550	40.19	36.40
CH134	5670	40.50	36.40

TX CH102

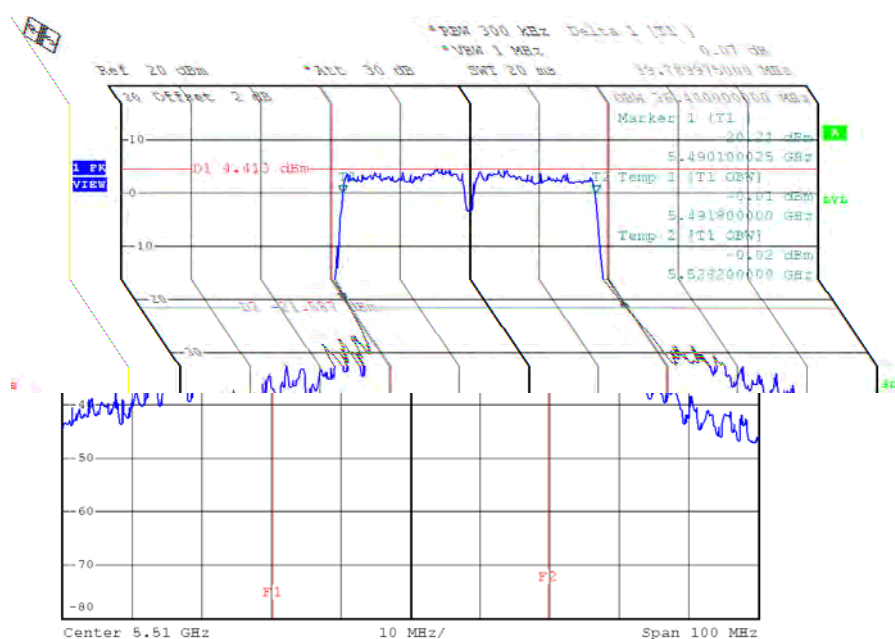


Date: 23.DEC.2015 17:04:00

TX CH110

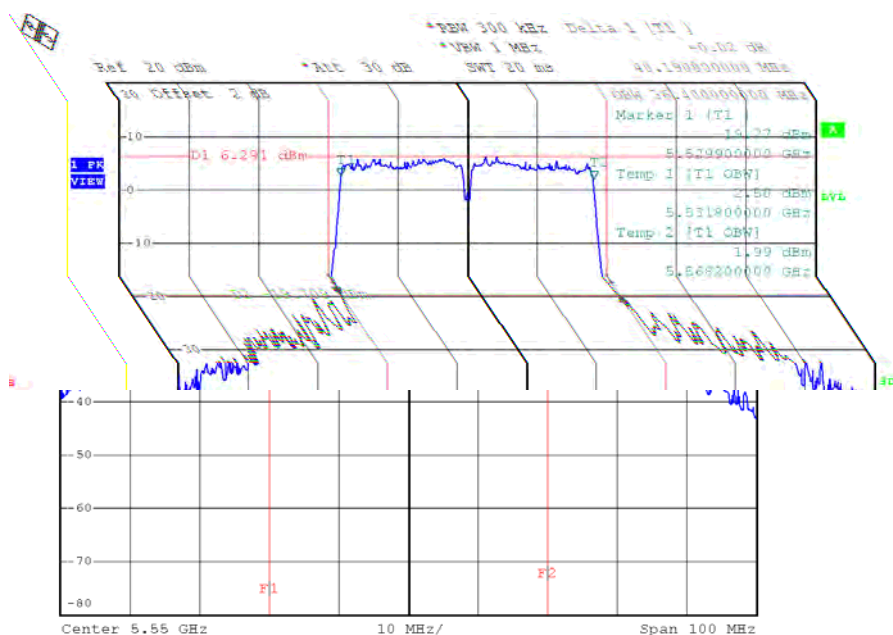

Date: 23.DEC.2015 17:05:04

TX CH134

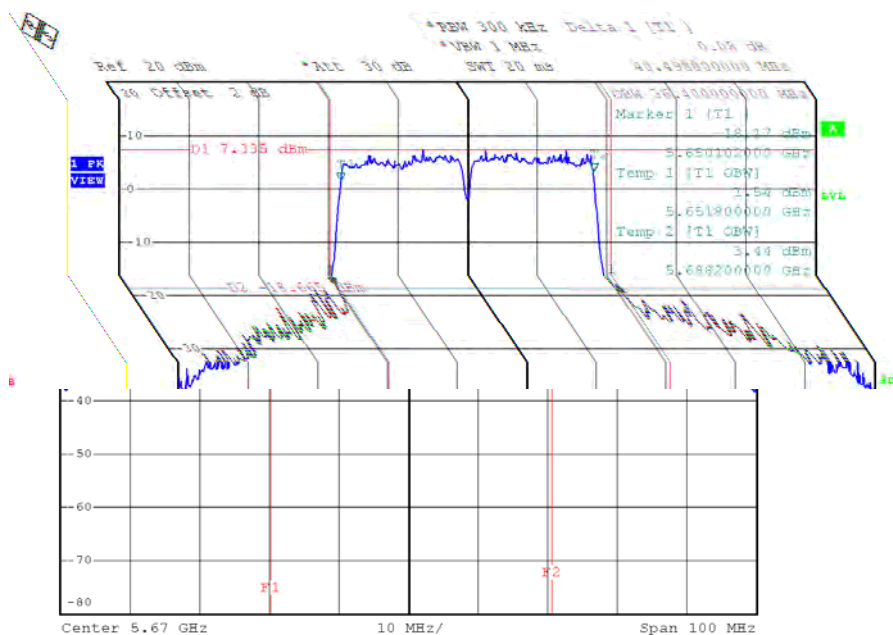


Date: 23.DEC.2015 17:06:47

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	80.60	76.00
CH122	5610	82.20	76.00

TX CH106

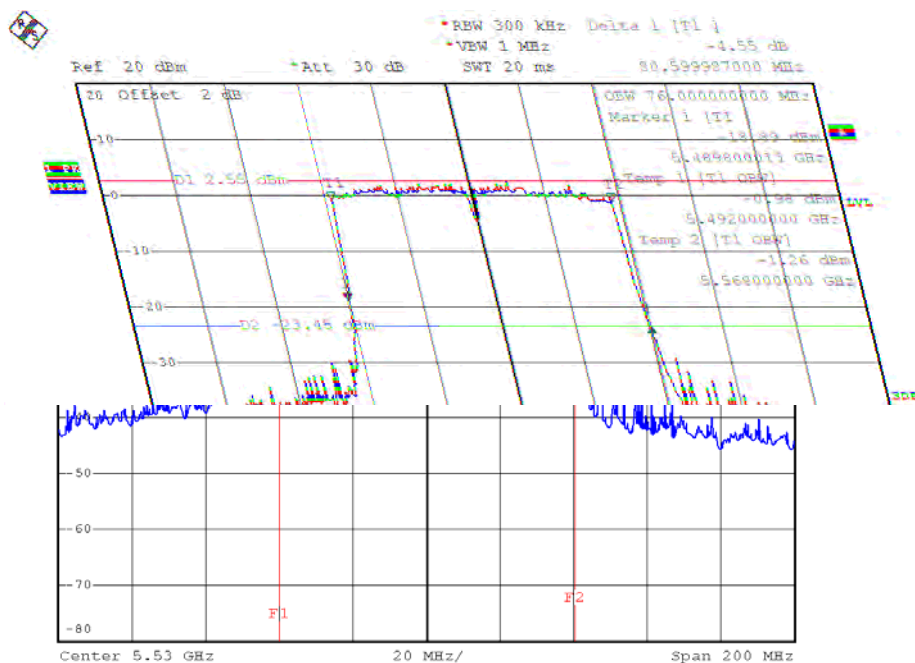

Date: 29.DEC.2015 11:09:49

TX CH122

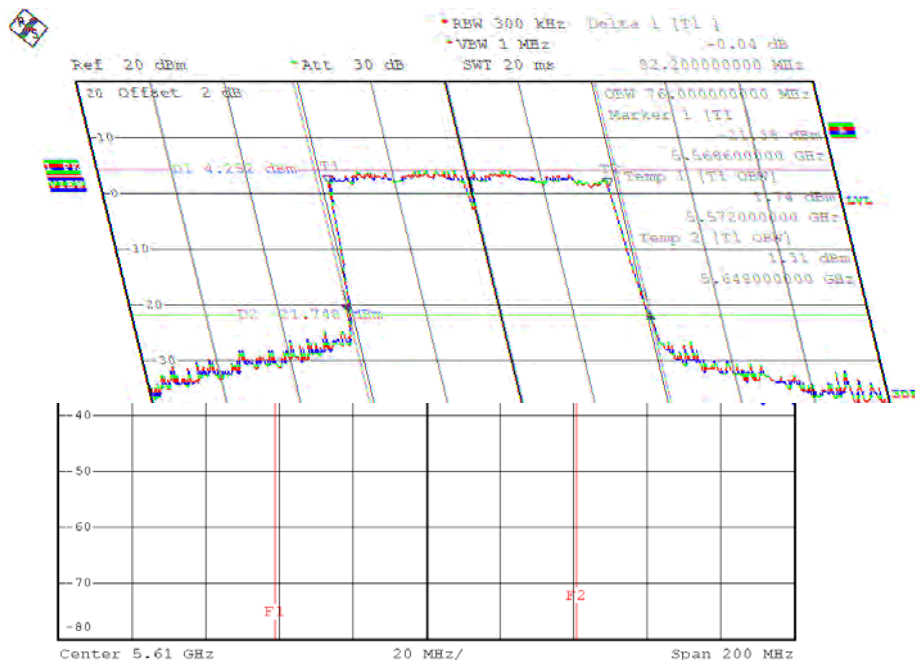


Date: 29.DEC.2015 11:10:44

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.65	17.60	>=500
CH157	5785	17.39	30.20	>=500
CH165	5825	17.65	17.70	>=500

TX CH 149

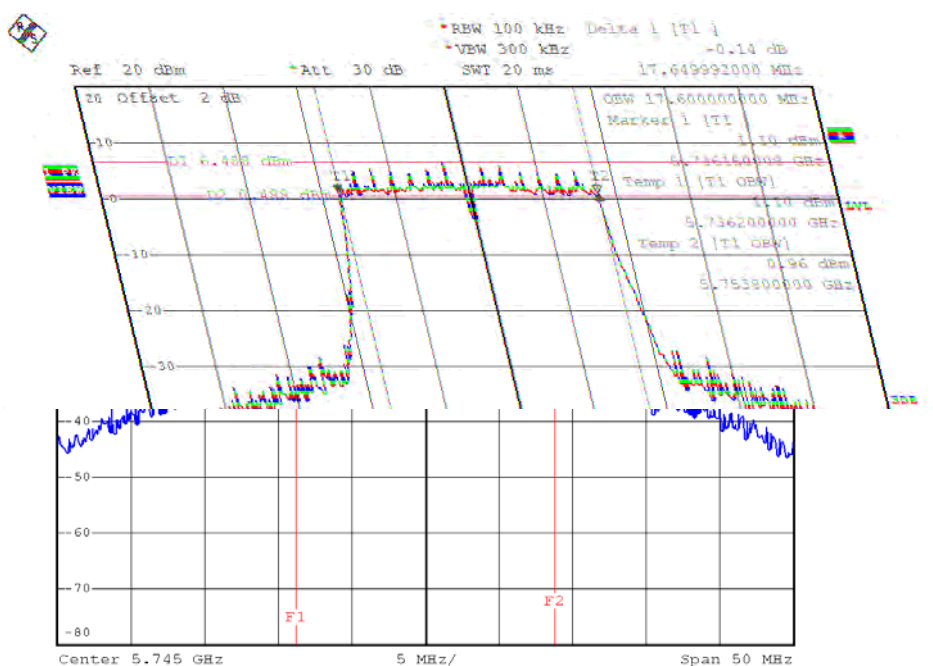


Date: 23.DEC.2015 16:46:24

TX CH 157

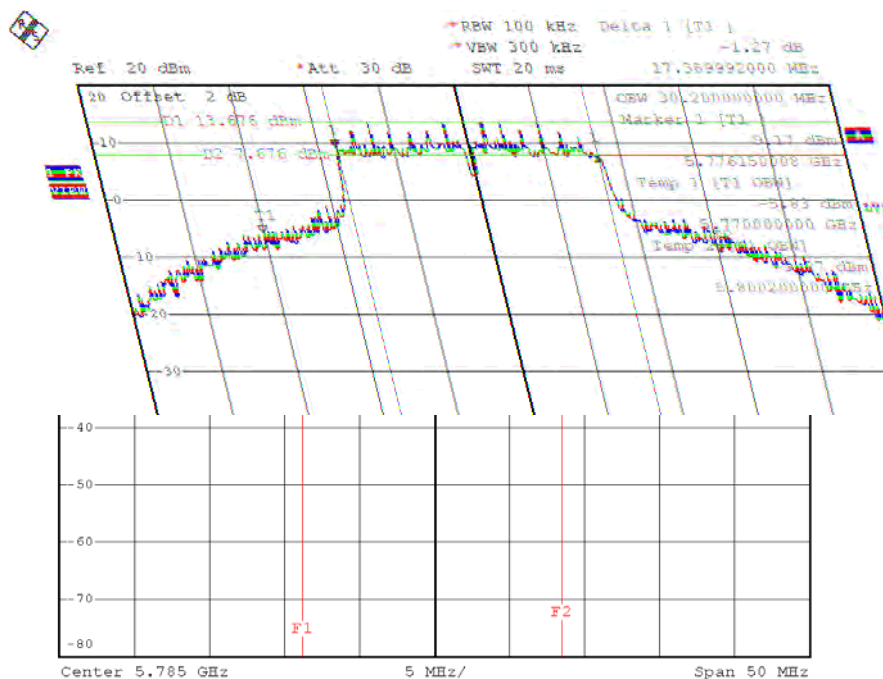

Date: 23.DEC.2015 16:47:42

TX CH 165

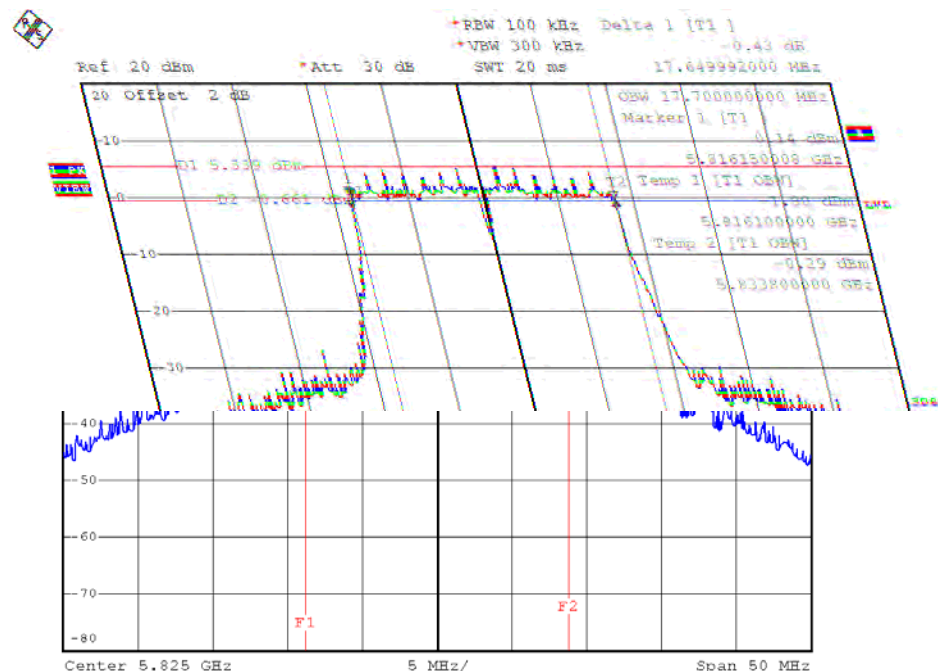


Date: 23.DEC.2015 16:48:40

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.60	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

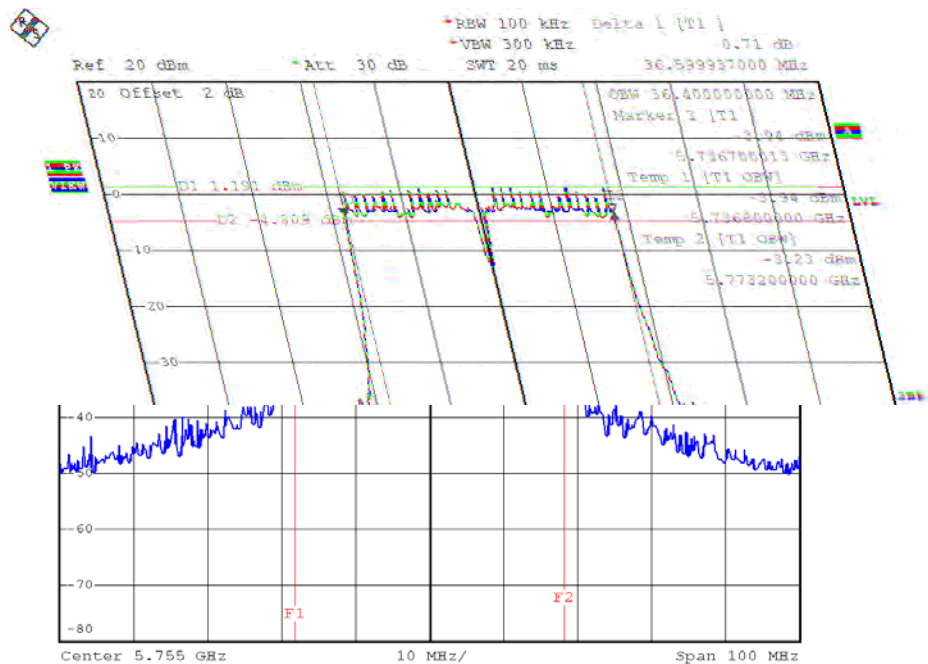

Date: 23.DEC.2015 17:09:03

TX CH 159

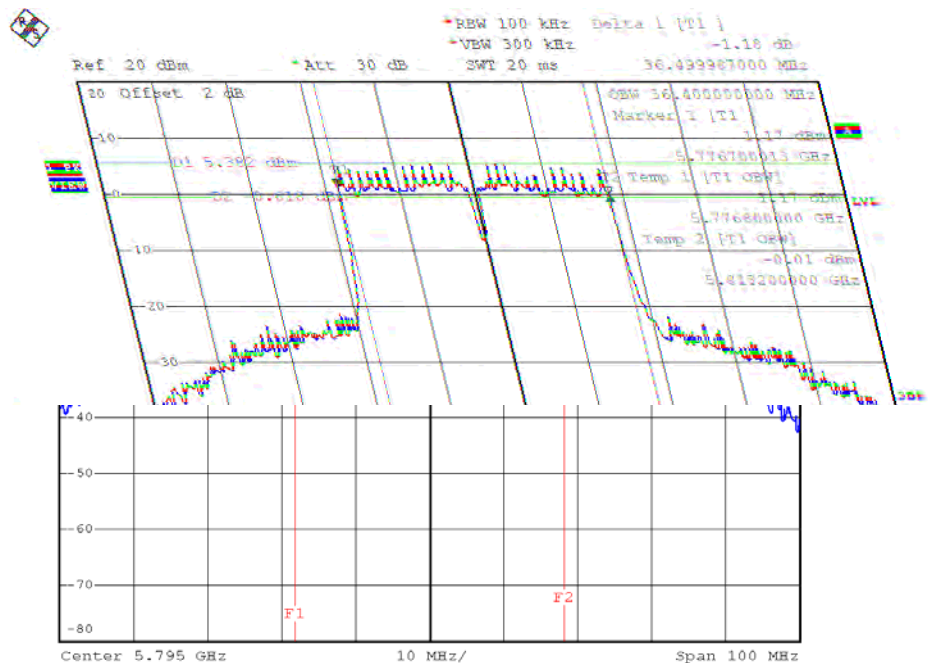


Date: 23.DEC.2015 17:15:32

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.00	76.00	>=500

TX CH 155

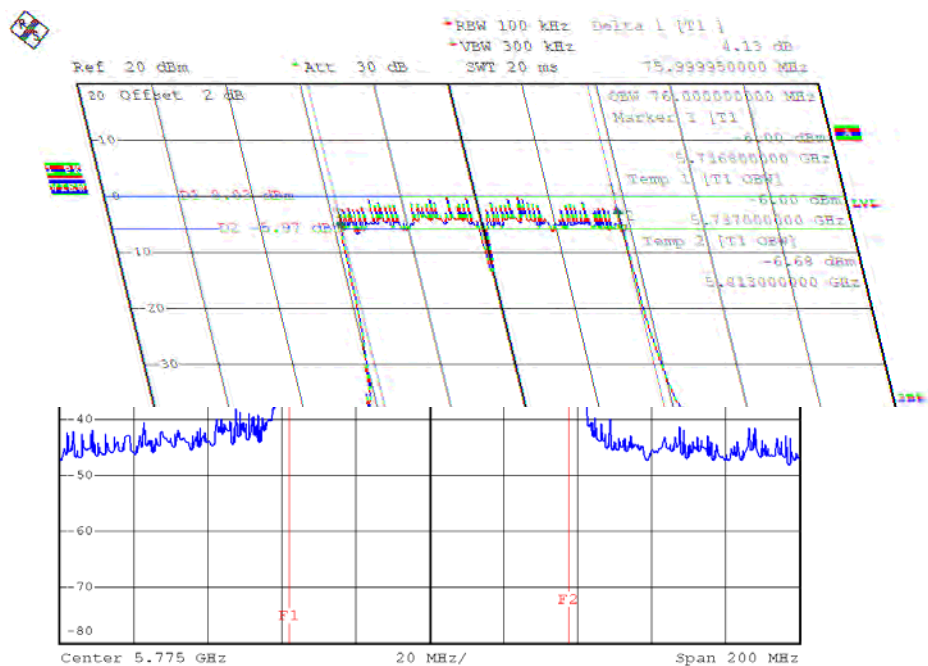

Date: 29.DEC.2015 11:11:55

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.64	0.10	19.74	30.00	1.00
CH40	5200	19.02	0.10	19.12	30.00	1.00
CH48	5240	20.83	0.10	20.93	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.69	0.26	14.95	30.00	1.00
CH40	5200	15.04	0.26	15.30	30.00	1.00
CH48	5240	17.09	0.26	17.35	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.97	0.26	13.23	30.00	1.00
CH40	5200	13.59	0.26	13.85	30.00	1.00
CH48	5240	16.13	0.26	16.39	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.03	0.26	14.29	30.00	1.00
CH40	5200	15.31	0.26	15.57	30.00	1.00
CH48	5240	17.33	0.26	17.59	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.98	30.00	1.00
CH40	5200	19.74	30.00	1.00
CH48	5240	21.91	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.64	1.29	15.93	30.00	1.00
CH46	5230	17.82	1.29	19.11	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.04	1.29	14.33	30.00	1.00
CH46	5230	16.81	1.29	18.10	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.57	1.29	15.86	30.00	1.00
CH46	5230	18.32	1.29	19.61	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	20.20	30.00	1.00
CH46	5230	23.76	30.00	1.00

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.98	2.00	19.98	23.00	0.20
CH40	5200	17.41	2.00	19.41	23.00	0.20
CH48	5240	17.61	2.00	19.61	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.19	2.00	14.19	23.00	0.20
CH40	5200	12.78	2.00	14.78	23.00	0.20
CH48	5240	11.80	2.00	13.80	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.93	2.00	12.93	23.00	0.20
CH40	5200	11.50	2.00	13.50	23.00	0.20
CH48	5240	11.39	2.00	13.39	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.37	2.00	14.37	23.00	0.20
CH40	5200	13.10	2.00	15.10	23.00	0.20
CH48	5240	12.68	2.00	14.68	23.00	0.20

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.65	23.00	0.20
CH40	5200	19.28	23.00	0.20
CH48	5240	18.76	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.95	2.00	16.95	23.00	0.20
CH46	5230	14.98	2.00	16.98	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.50	2.00	15.50	23.00	0.20
CH46	5230	13.91	2.00	15.91	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.97	2.00	16.97	23.00	0.20
CH46	5230	15.36	2.00	17.36	23.00	0.20

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	21.30	23.00	0.20
CH46	5230	21.56	23.00	0.20

Test Mode: UNII-2A/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.35	0.10	19.45	24.00	0.25
CH60	5300	20.22	0.10	20.32	24.00	0.25
CH64	5320	19.45	0.10	19.55	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.18	0.26	15.44	24.00	0.25
CH60	5300	15.56	0.26	15.82	24.00	0.25
CH64	5320	15.63	0.26	15.89	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.28	0.26	15.54	24.00	0.25
CH60	5300	16.23	0.26	16.49	24.00	0.25
CH64	5320	16.51	0.26	16.77	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.56	0.26	15.82	24.00	0.25
CH60	5300	15.57	0.26	15.83	24.00	0.25
CH64	5320	15.48	0.26	15.74	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	20.37	24.00	0.25
CH60	5300	20.83	24.00	0.25
CH64	5320	20.93	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.89	1.29	16.18	24.00	0.25
CH62	5310	14.53	1.29	15.82	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	13.82	1.29	15.11	24.00	0.25
CH62	5310	14.14	1.29	15.43	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.03	1.29	16.32	24.00	0.25
CH62	5310	14.85	1.29	16.14	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	20.67	24.00	0.25
CH62	5310	20.58	24.00	0.25

Test Mode: UNII-2C/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.43	0.10	19.53	24.00	0.25
CH116	5580	20.46	0.10	20.56	24.00	0.25
CH140	5700	19.44	0.10	19.54	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.06	0.26	15.32	24.00	0.25
CH116	5580	15.11	0.26	15.37	24.00	0.25
CH140	5700	15.61	0.26	15.87	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.67	0.26	13.93	24.00	0.25
CH116	5580	15.14	0.26	15.40	24.00	0.25
CH140	5700	14.78	0.26	15.04	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.31	0.26	15.57	24.00	0.25
CH116	5580	15.19	0.26	15.45	24.00	0.25
CH140	5700	14.83	0.26	15.09	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.77	24.00	0.25
CH116	5580	20.18	24.00	0.25
CH140	5700	20.12	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.75	1.29	16.04	24.00	0.25
CH110	5550	17.03	1.29	18.32	24.00	0.25
CH134	5670	18.01	1.29	19.30	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	13.74	1.29	15.03	24.00	0.25
CH110	5550	16.73	1.29	18.02	24.00	0.25
CH134	5670	17.82	1.29	19.11	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.21	1.29	16.50	24.00	0.25
CH110	5550	17.43	1.29	18.72	24.00	0.25
CH134	5670	17.34	1.29	18.63	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	20.67	24.00	0.25
CH110	5550	23.13	24.00	0.25
CH134	5670	23.79	24.00	0.25

Test Mode: UNII-3/ TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.81	0.10	19.98	30.00	1.00
CH157	5785	25.56	0.10	25.66	30.00	1.00
CH165	5825	16.78	0.10	16.88	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.46	0.26	18.72	30.00	1.00
CH157	5785	24.16	0.26	24.42	30.00	1.00
CH165	5825	17.26	0.26	17.52	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.42	0.26	16.68	30.00	1.00
CH157	5785	23.14	0.26	23.40	30.00	1.00
CH165	5825	16.34	0.26	16.60	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.23	0.26	18.49	30.00	1.00
CH157	5785	23.82	0.26	24.08	30.00	1.00
CH165	5825	17.83	0.26	18.09	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.83	30.00	1.00
CH157	5785	28.76	30.00	1.00
CH165	5825	22.22	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.34	1.29	16.63	30.00	1.00
CH159	5795	19.81	1.29	21.10	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	13.51	1.29	14.80	30.00	1.00
CH159	5795	18.51	1.29	19.80	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.38	1.29	16.67	30.00	1.00
CH159	5795	20.11	1.29	21.40	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	20.89	30.00	1.00
CH159	5795	25.59	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.03	0.13	14.16	30.00	1.00
CH40	5200	14.48	0.13	14.61	30.00	1.00
CH48	5240	21.48	0.13	21.61	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.29	0.13	12.42	30.00	1.00
CH40	5200	12.91	0.13	13.04	30.00	1.00
CH48	5240	20.32	0.13	20.45	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.68	0.13	13.81	30.00	1.00
CH40	5200	14.81	0.13	14.94	30.00	1.00
CH48	5240	22.04	0.13	22.17	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.30	30.00	1.00
CH40	5200	19.04	30.00	1.00
CH48	5240	26.24	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.42	1.03	15.45	30.00	1.00
CH46	5230	17.41	1.03	18.44	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.02	1.03	14.05	30.00	1.00
CH46	5230	16.53	1.03	17.56	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.55	1.03	15.58	30.00	1.00
CH46	5230	17.91	1.03	18.94	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	19.85	30.00	1.00
CH46	5230	23.12	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.36	1.38	15.74	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	13.09	1.38	14.47	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.22	1.38	15.60	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	20.08	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.30	2.00	14.30	23.00	0.20
CH40	5200	12.34	2.00	14.34	23.00	0.20
CH48	5240	11.65	2.00	13.65	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.97	2.00	12.97	23.00	0.20
CH40	5200	11.16	2.00	13.16	23.00	0.20
CH48	5240	10.99	2.00	12.99	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.35	2.00	14.35	23.00	0.20
CH40	5200	12.81	2.00	14.81	23.00	0.20
CH48	5240	12.54	2.00	14.54	23.00	0.20

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.69	23.00	0.20
CH40	5200	18.93	23.00	0.20
CH48	5240	18.54	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.94	2.00	16.94	23.00	0.20
CH46	5230	14.54	2.00	16.54	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.41	2.00	15.41	23.00	0.20
CH46	5230	13.41	2.00	15.41	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.84	2.00	16.84	23.00	0.20
CH46	5230	15.09	2.00	15.09	23.00	0.20

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	21.22	23.00	0.20
CH46	5230	20.50	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.61	2.00	17.61	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.15	2.00	16.15	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.40	2.00	17.40	23.00	0.20

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	21.87	23.00	0.20

Test Mode: UNII-2A/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.51	0.13	14.64	24.00	0.25
CH60	5300	14.48	0.13	14.61	24.00	0.25
CH64	5320	14.43	0.13	14.56	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.41	0.13	14.54	24.00	0.25
CH60	5300	15.41	0.13	15.54	24.00	0.25
CH64	5320	15.63	0.13	15.76	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.89	0.13	15.02	24.00	0.25
CH60	5300	14.42	0.13	14.55	24.00	0.25
CH64	5320	14.43	0.13	14.56	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.51	24.00	0.25
CH60	5300	19.70	24.00	0.25
CH64	5320	19.77	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.91	1.03	15.94	24.00	0.25
CH62	5310	13.41	1.03	14.44	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.07	1.03	15.10	24.00	0.25
CH62	5310	14.43	1.03	15.46	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.79	1.03	15.82	24.00	0.25
CH62	5310	13.41	1.03	14.44	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	20.41	24.00	0.25
CH62	5310	19.58	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	14.68	1.38	16.06	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	13.86	1.38	15.24	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	14.87	1.38	16.25	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	20.64	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.49	0.13	14.62	24.00	0.25
CH116	5580	14.61	0.13	14.74	24.00	0.25
CH140	5700	15.42	0.13	15.55	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.23	0.13	13.36	24.00	0.25
CH116	5580	14.54	0.13	14.67	24.00	0.25
CH140	5700	14.46	0.13	14.59	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.86	0.13	14.99	24.00	0.25
CH116	5580	14.76	0.13	14.89	24.00	0.25
CH140	5700	14.71	0.13	14.84	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.15	24.00	0.25
CH116	5580	19.54	24.00	0.25
CH140	5700	19.78	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.12	1.03	15.15	24.00	0.25
CH110	5550	16.25	1.03	17.28	24.00	0.25
CH134	5670	17.83	1.03	18.86	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.91	1.03	13.94	24.00	0.25
CH110	5550	15.91	1.03	16.94	24.00	0.25
CH134	5670	17.72	1.03	18.75	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.42	1.03	15.45	24.00	0.25
CH110	5550	16.81	1.03	17.84	24.00	0.25
CH134	5670	17.53	1.03	18.56	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	19.67	24.00	0.25
CH110	5550	22.14	24.00	0.25
CH134	5670	23.50	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	15.26	1.38	16.64	24.00	0.25
CH122	5610	17.28	1.38	18.66	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	14.15	1.38	15.53		0.25
CH122	5610	16.88	1.38	18.26	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	15.50	1.38	16.88	24.00	0.25
CH122	5610	17.87	1.38	19.25	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	21.16	24.00	0.25
CH122	5610	23.51	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.43	0.13	17.56	30.00	1.00
CH157	5785	23.25	0.13	23.38	30.00	1.00
CH165	5825	16.43	0.13	16.56	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.31	0.13	15.44	30.00	1.00
CH157	5785	21.35	0.13	21.48	30.00	1.00
CH165	5825	15.55	0.13	15.68	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.34	0.13	17.47	30.00	1.00
CH157	5785	22.32	0.13	22.45	30.00	1.00
CH165	5825	16.93	0.13	17.06	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	21.70	30.00	1.00
CH157	5785	27.28	30.00	1.00
CH165	5825	21.24	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.82	1.03	15.85	30.00	1.00
CH159	5795	18.81	1.03	19.84	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	13.17	1.03	14.20	30.00	1.00
CH159	5795	17.51	1.03	18.54	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.02	1.03	16.05	30.00	1.00
CH159	5795	19.17	1.03	20.20	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	20.21	30.00	1.00
CH159	5795	24.35	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	16.38	1.38	17.76	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	15.22	1.38	16.60	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	16.01	1.38	17.39	30.00	1.00


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	22.05	30.00	1.00

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode: UNII-1/TX A Mode

TX mode CH36

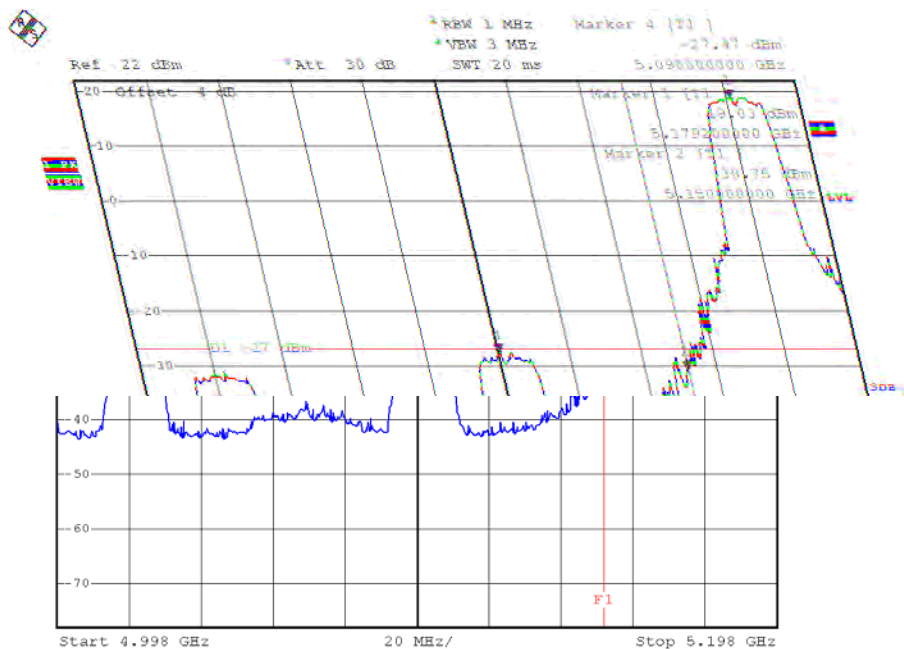

Date: 18.DEC.2015 17:12:13


TX mode CH48

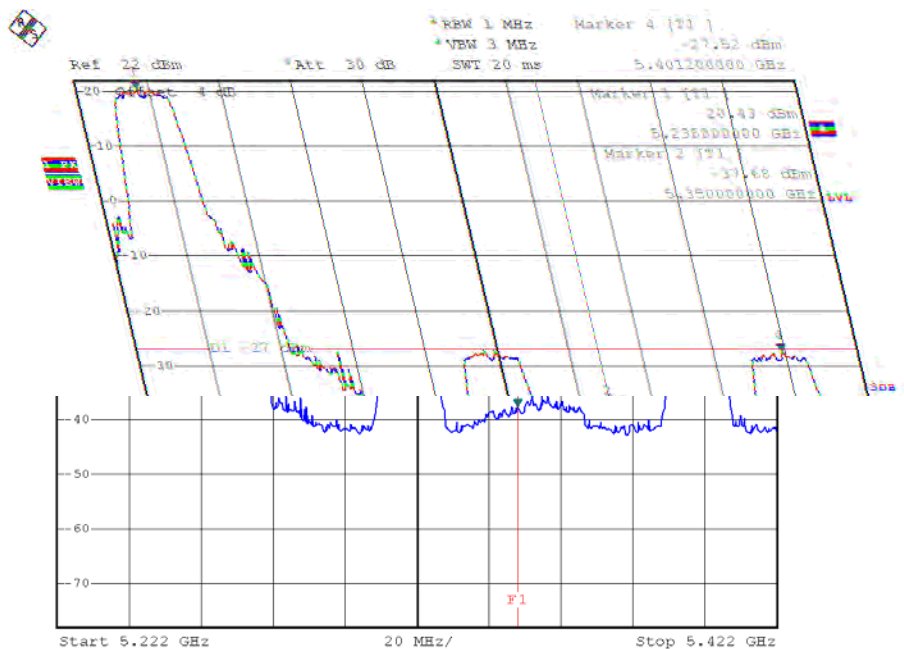

Date: 18.DEC.2015 15:38:29


Test Mode: UNII-1/TX N20 Mode_ANT 1

TX mode CH36

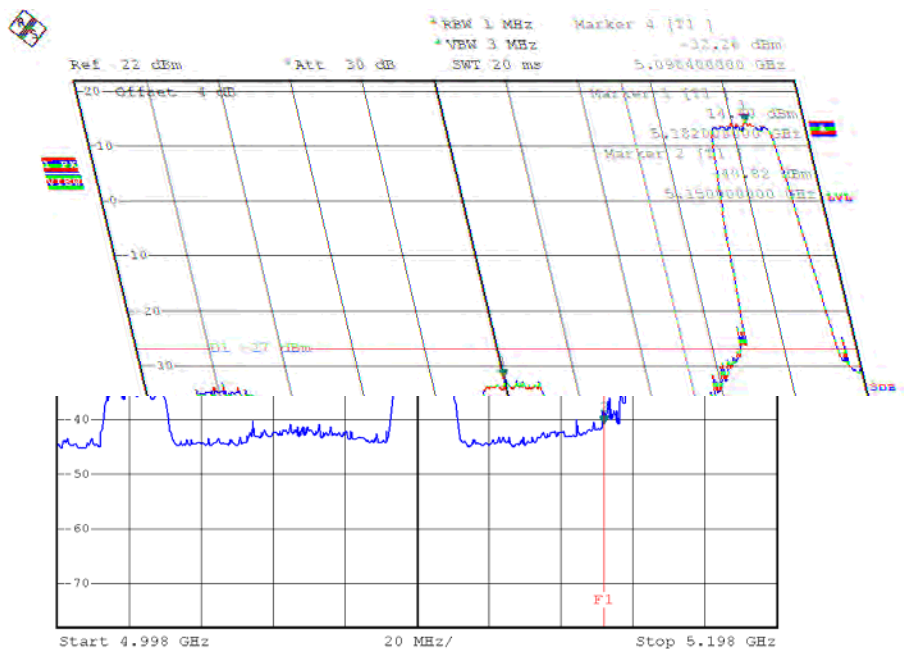

Date: 18.DEC.2015 17:13:10


TX mode CH48

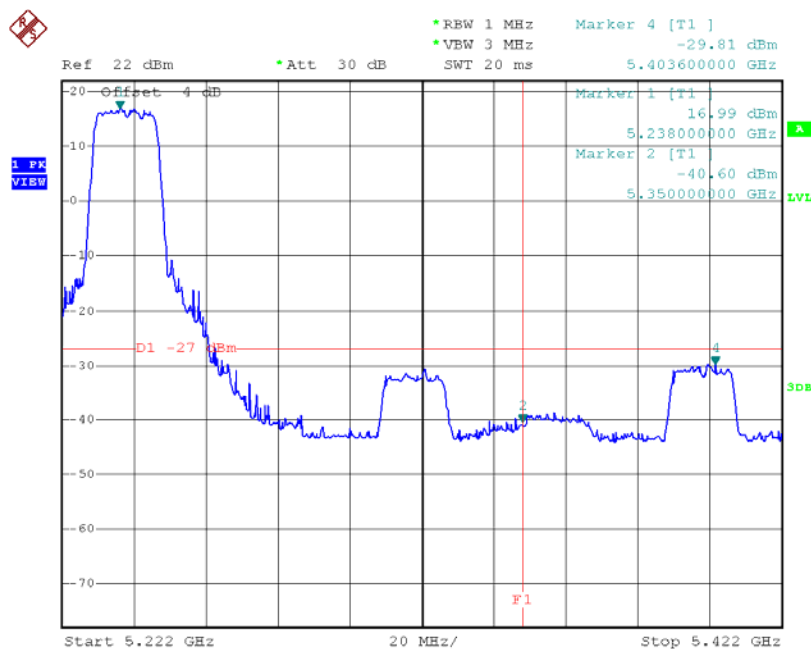

Date: 18.DEC.2015 17:21:44


Test Mode: UNII-1/TX N20 Mode_ANT 2

TX mode CH36

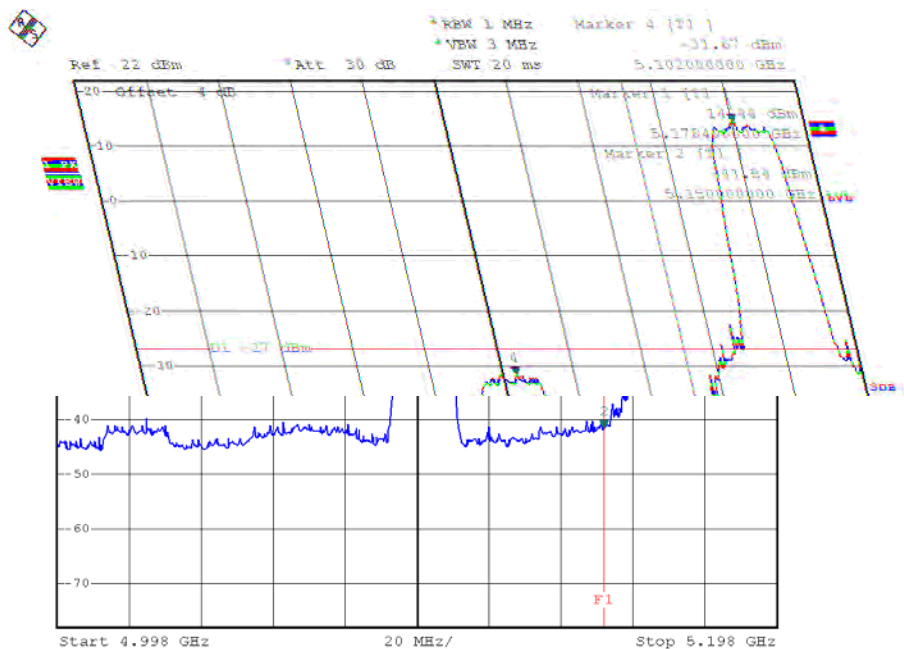

Date: 18.DEC.2015 17:13:52


TX mode CH48

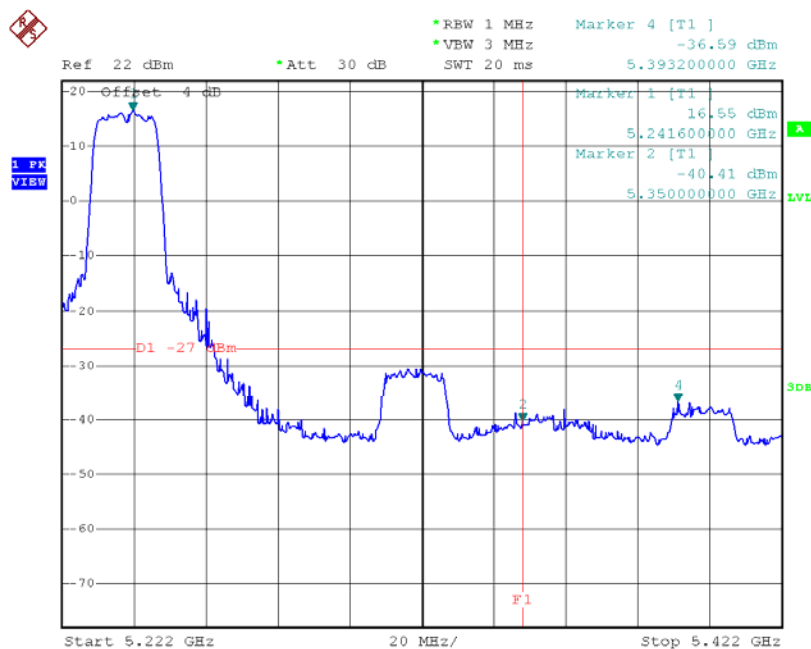

Date: 18.DEC.2015 17:21:13


Test Mode: UNII-1/TX N20 Mode_ANT 3

TX mode CH36

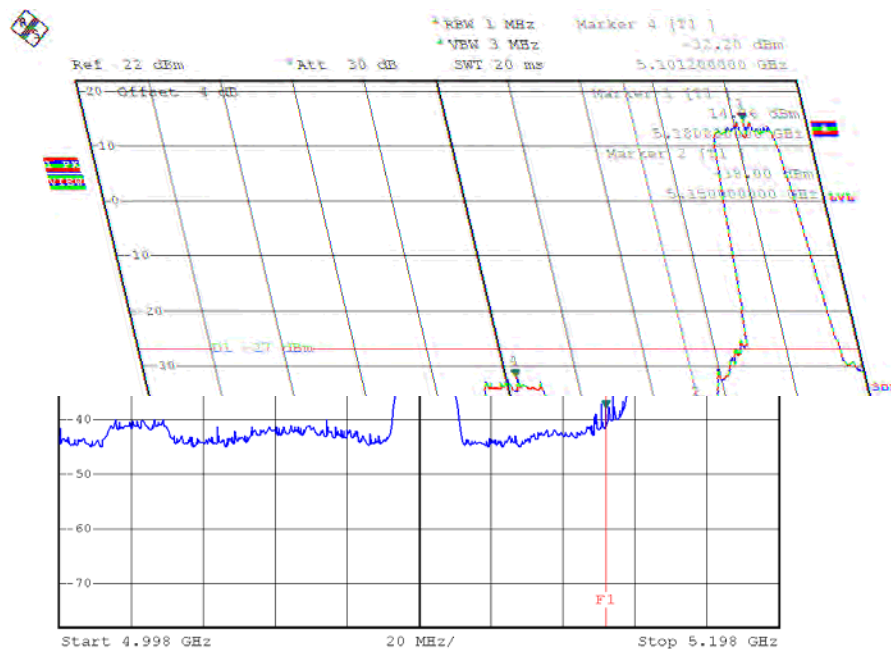

Date: 18.DEC.2015 17:14:21


TX mode CH48

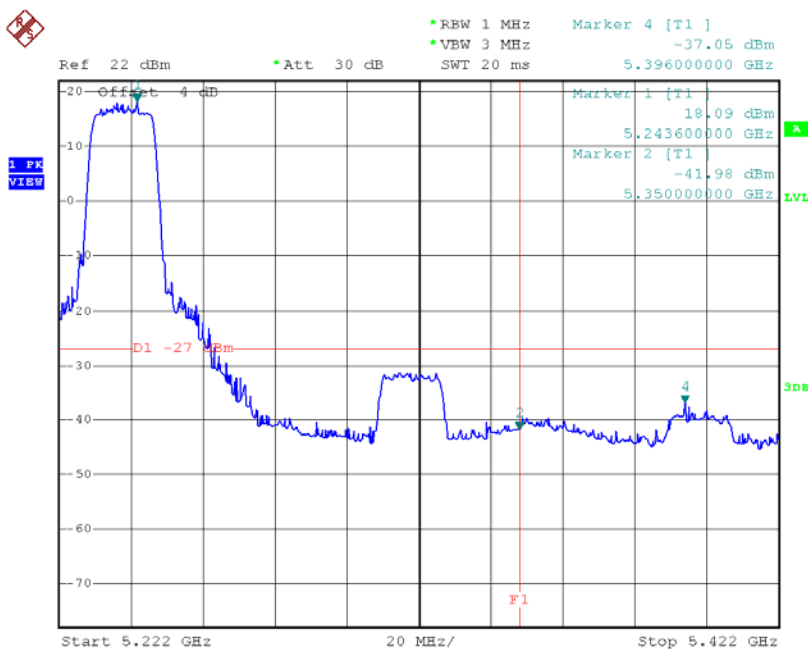

Date: 18.DEC.2015 17:20:10


Test Mode: UNII-1/TX N40 Mode_ANT 1

TX mode CH38

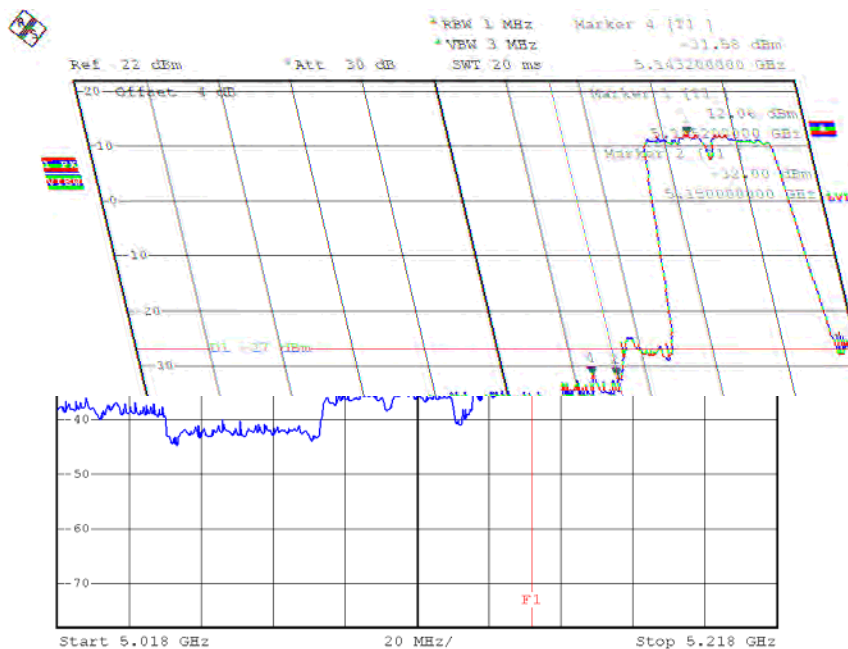

Date: 19.DEC.2015 15:53:31


TX mode CH46

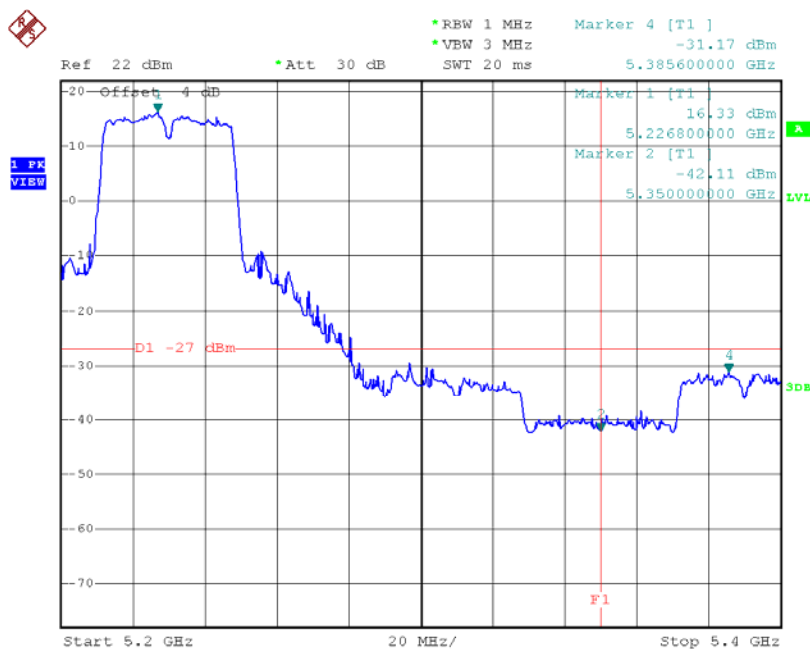

Date: 19.DEC.2015 15:55:53


Test Mode: UNII-1/TX N40 Mode_ANT 2

TX mode CH38

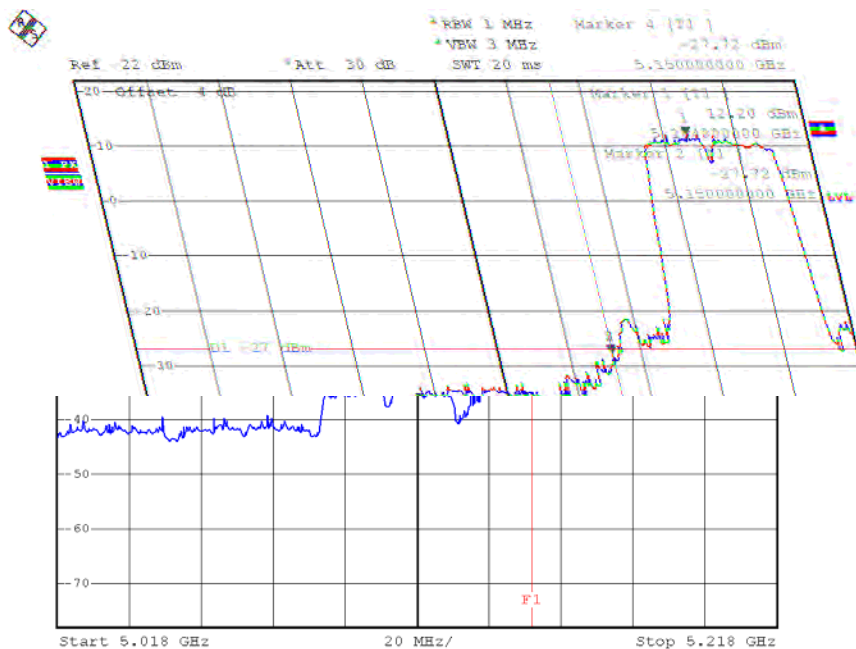

Date: 19.DEC.2015 15:53:00


TX mode CH46

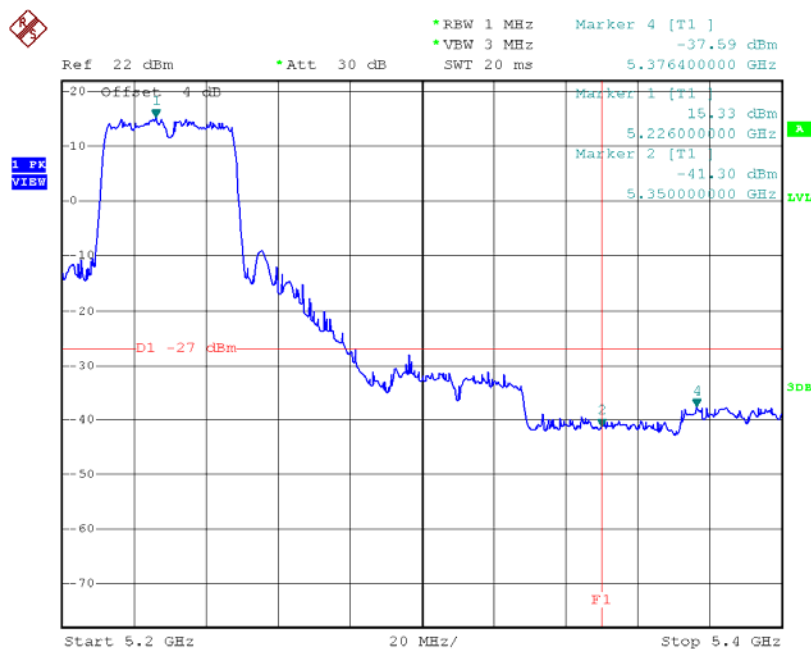

Date: 19.DEC.2015 15:56:34


Test Mode: UNII-1/TX N40 Mode_ANT 3

TX mode CH38

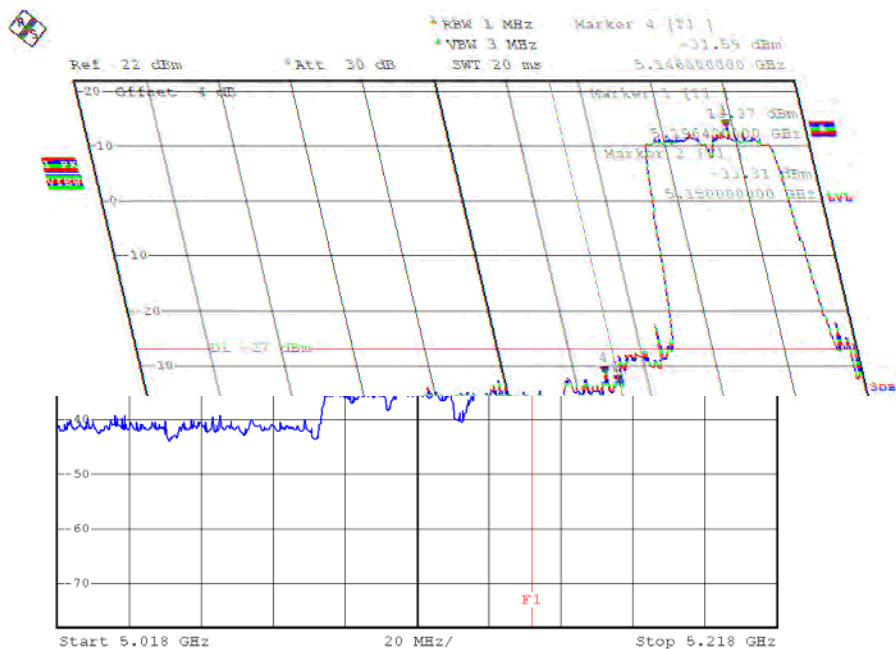

Date: 19.DEC.2015 15:52:06


TX mode CH46

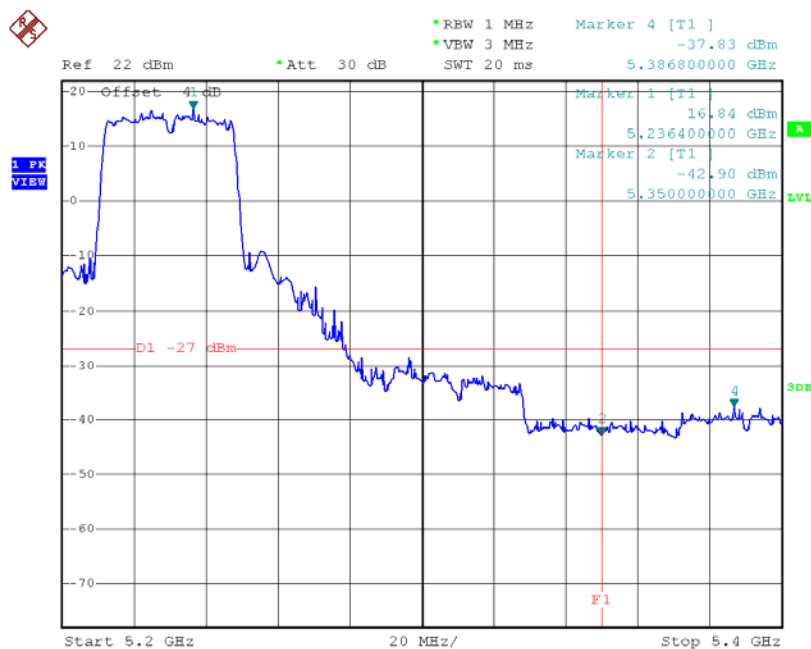

Date: 19.DEC.2015 15:57:01


Test Mode: UNII-2A/TX A Mode

TX mode CH52

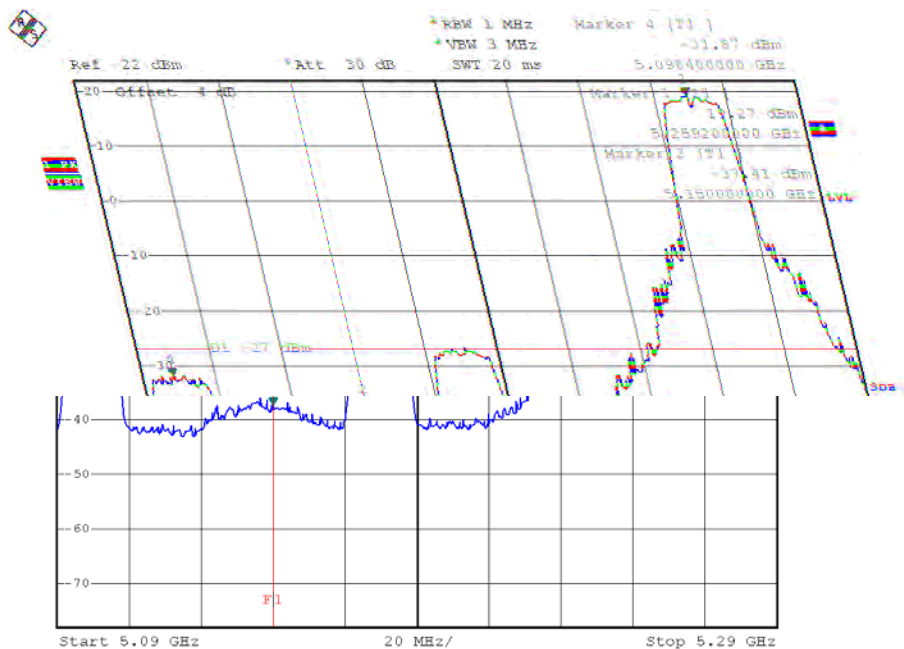

Date: 18.DEC.2015 15:40:29


TX mode CH64

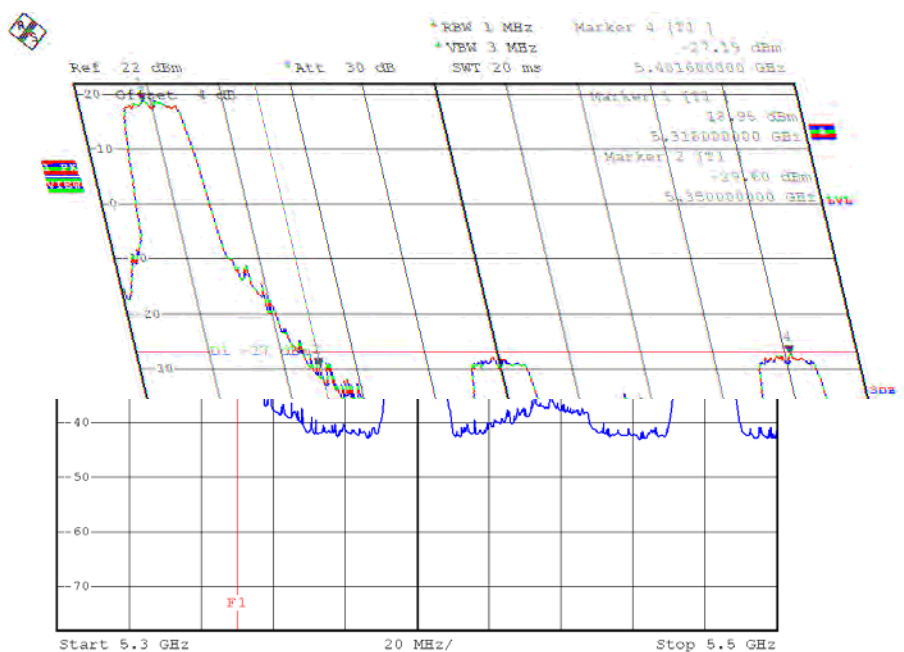

Date: 18.DEC.2015 15:43:12


Test Mode: UNII-2A/TX N20 Mode_ANT 1

TX mode CH52

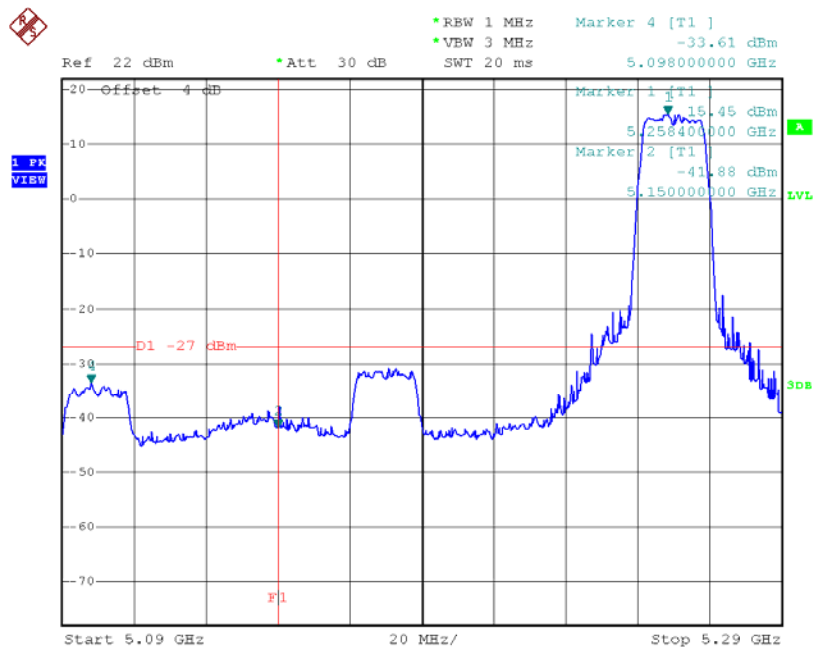

Date: 18.DEC.2015 17:47:40


TX mode CH64

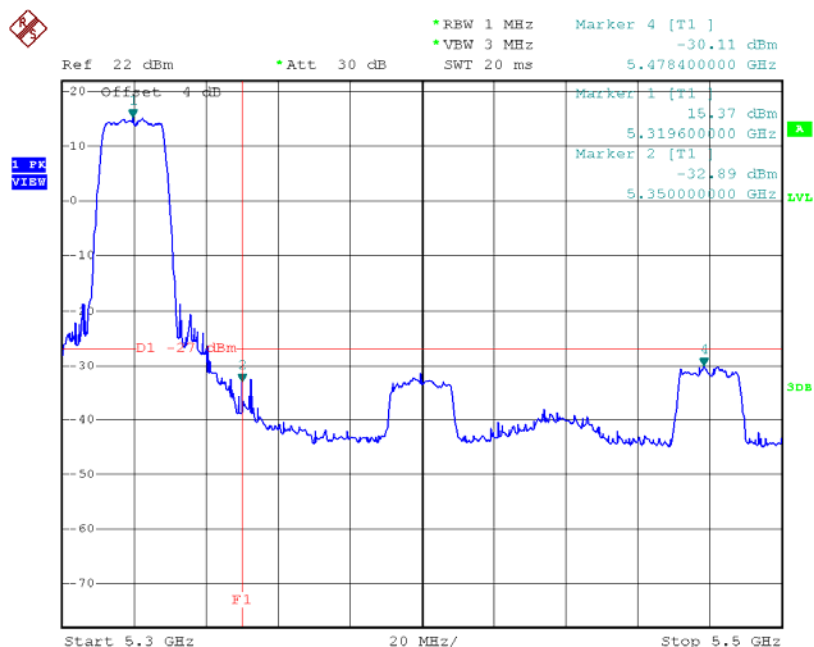

Date: 18.DEC.2015 17:57:17


Test Mode: UNII-2A/TX N20 Mode_ANT 2

TX mode CH52

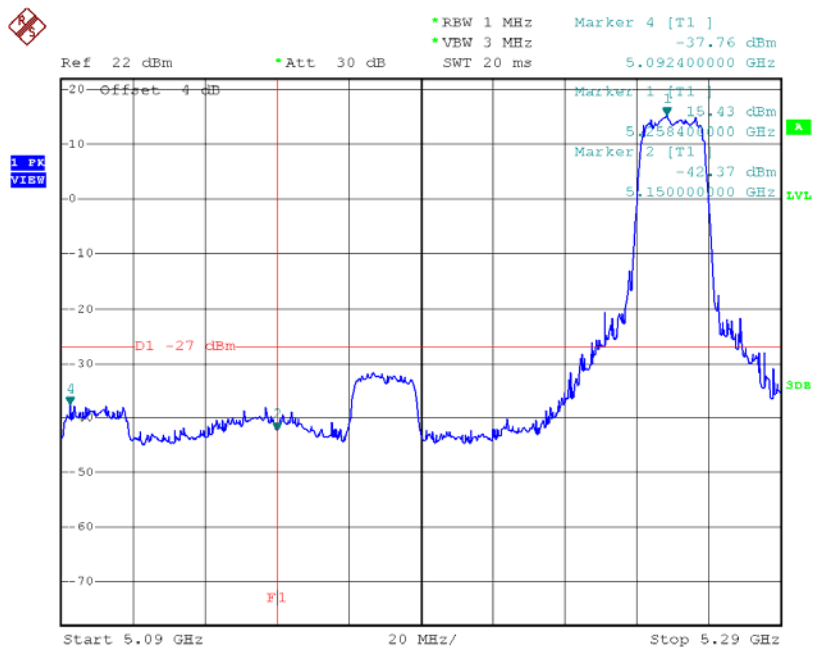

Date: 18.DEC.2015 17:48:27

TX mode CH64

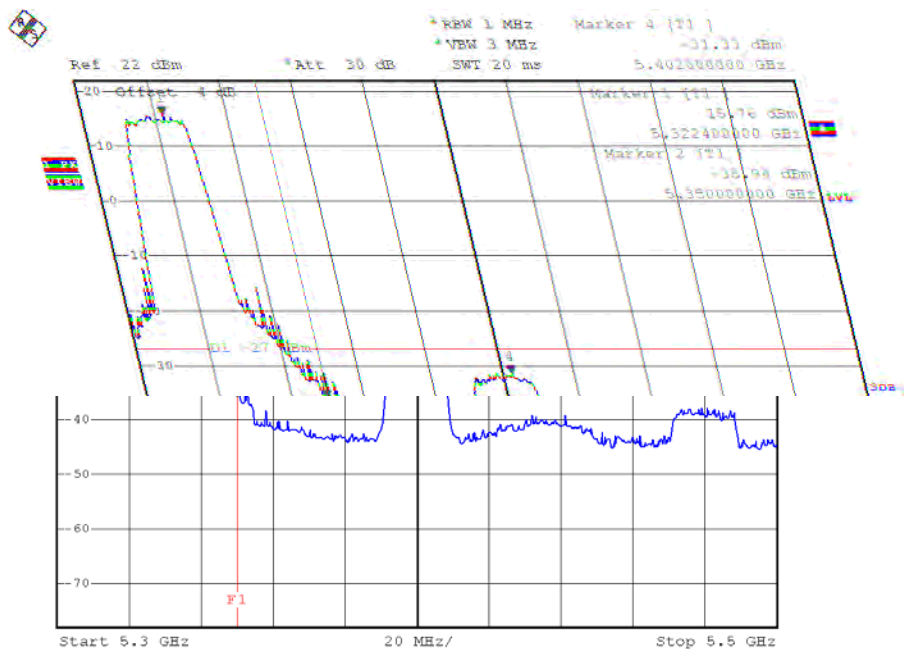

Date: 18.DEC.2015 17:57:44