



DFS MEASUREMENT REPORT

FCC ID: Q9DAPEX0765
Applicant: Hewlett Packard Enterprise Company
Product: ACCESS POINT
Model No.: APEX0765, APEX0765EX
Trademark: 
FCC Classification: Unlicensed National Information Infrastructure (NII)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
Type of Device: Master
Result: Complies
Received Date: 2025-04-27
Test Date: 2026-01-06 ~ 2026-01-08

Reviewed By:

Jame Yuan

Jame Yuan

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1025043-U203	V01	Initial Report	2026-02-05	Valid

Note 1: This report was based on original report No: 2504TW0106-U5. Now the product added the zero-wait DFS (ZWDFS) features that is intended to prevent temporary network outages to perform CAC on DFS channels when changing channels. When enabled, the AP will perform a CAC check on the target channel, while still operating on the current channel. If radar is not detected on the target channel over the zero-wait CAC time, then the AP will move network operation to the target channel. The ZWDFS feature does not affect the AP's normal DFS response to radars on the operating channel.

Note 2: The following test plan is setup in the following manner:

1. Verify the statistical performance check on the target channel with the ZWDFS feature enabled.
2. Verify the ZWDFS CAC time.

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	7
1.6. Working Frequencies	7
1.7. Antenna Details	8
1.8. Description of Antenna RF Port	9
2. Test Configuration	10
2.1. Test Mode	10
2.2. Test Channel	10
2.3. Applied Standards	10
2.4. Test Environment Condition	10
3. DFS Detection Thresholds and Radar Test Waveforms	11
3.1. Applicability	11
3.2. DFS Devices Requirements	12
3.3. DFS Detection Threshold Values	14
3.4. Parameters of DFS Test Signals	15
3.5. Conducted Test Setup	18
4. Measuring Instrument	19
5. Test Result	20
5.1. Summary	20
5.2. Radar Waveform Calibration Measurement	21
5.2.1. Calibration Setup	21
5.2.2. Calibration Procedure	21
5.2.3. Calibration & Channel Loading Result	21
5.3. NII Detection Bandwidth Measurement	22
5.3.1. Test Limit	22
5.3.2. Test Procedure	22
5.3.3. Test Result	23
5.4. Channel Availability Check Time Measurement	24
5.4.1. Test Limit	24
5.4.2. Test Procedure	24
5.4.3. Test Result	24

5.5.	Statistical Performance Check Measurement.....	25
5.5.1.	Test Limit	25
5.5.2.	Test Procedure	25
5.5.3.	Test Result	25
Appendix A - Test Result.....		26
A.1	Calibration Test Result	26
A.2	Channel Loading Test Result	28
A.3	NII Detection Bandwidth Test Result.....	29
A.4	Channel Availability Check Time Test Result	31
A.5	Statistical Performance Check.....	33
Appendix B - Test Setup Photograph		94
Appendix C - EUT Photograph		95

1. General Information

1.1. Applicant

Hewlett Packard Enterprise Company
6280 America Center Drive, San Jose CA 95002, United States

1.2. Manufacturer

Hewlett Packard Enterprise Company
6280 America Center Drive, San Jose CA 95002, United States

1.3. Testing Facility

☒	Test Site - MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China
	Laboratory Accreditations
	A2LA: 3628.01 FCC: CN1166
	CNAS: L10551 ISED: CN0001
☐	Test Site - MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 FCC: CN1284
	CNAS: L10551 ISED: CN0105
☐	Test Site - MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261 FCC: 291082, TW3261
	ISED: TW3261

1.4. Product Information

Product Name	ACCESS POINT
Model No.	APEX0765, APEX0765EX
Serial No.	VNTLMPK00X
Software Version	ArubaOS_Hydra_10.8.1.0_cshen_94545
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	BLE only
GNSS Specification	GPS/Galileo
ZigBee Specification	802.15.4
Antenna Specification	Refer to Section 1.7
Operating Temp.	-40 ~ 65 °C
Operating Environment	Outdoor Use
Power Type	PoE Input
Accessories	
PoE Injector #1	Model No.: PD-9501-5GCO/AC Input: 100 – 240 V ~ 50-60Hz, 0.8 A Output: 54 V, 1.2 A
PoE Injector #2	Model No.: PD-9501-5GCO/DC Input: 10.8 ~ 30 Vdc, 8 A Output: 54 V, 1.2 A
Notes:	
- The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer. - The PoE Injectors are not marketed in conjunction with the device. - The two models use waterproof covers made of different materials, APEX0765 uses plastic waterproof cover, APEX0765EX uses metal waterproof cover, everything else is the same.	

1.5. Radio Specification under Test

Frequency Range	UNII-2A: 5250 ~ 5350 MHz UNII-2C: 5470 ~ 5725 MHz
Type of Modulation	802.11a/n/ac: OFDM 802.11ax/be: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 1733.4 Mbps 802.11ax: up to 2402 Mbps 802.11be: up to 2882 Mbps
Uniform Spreading (For DFS Frequency Band)	For the 5250-5350 MHz, 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
52	5260 MHz	56	5280 MHz	60	5300 MHz
64	5320 MHz	100	5500 MHz	104	5520 MHz
108	5540 MHz	112	5560 MHz	116	5580 MHz
120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz
144	5720 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz	102	5510 MHz
110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	142	5710 MHz	--	--

802.11ac-VHT80/ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
58	5290 MHz	106	5530 MHz	122	5610 MHz
138	5690 MHz	--	--	--	--


1.7. Antenna Details

Polarization & Ant No.	Operating Mode	Frequency Band (GHz)	30 Degree Peak Gain (dBi)	Directional Gain (dBi)	
				Uncorrelated Gain	Correlated Gain
Wi-Fi Antenna List					
Omni (A1/A2)	2.4G 2*2	2.4 ~ 2.5	N/A	2.8	2.8
Directional (A9/A10)	2.4G 2*2	2.4 ~ 2.5	N/A	6.1	6.1
Omni (A1/A2)	5G 2*2	5.1 ~ 5.8	-1.3	3.9	3.9
Directional (A9/A10)	5G 2*2	5.1 ~ 5.8	-8.9	6.0	6.0
Omni (A1/A2/A3/A4)	5G 4*4	5.1 ~ 5.8	-3.5	3.0	6.01
Directional (A9/A10/A11/A12)	5G 4*4	5.1 ~ 5.8	-10.9	6.1	9.11
Omni (A5/A6)	6G 2*2	5.9 ~ 6.5	0.56	3.3	3.3
Directional (A13/A14)	6G 2*2	5.9 ~ 6.5	-8.7	7.4	7.4
Omni (A5/A6/A7/A8)	6G 4*4	5.9 ~ 6.5	-2.7	3.2	6.21
Directional (A13/A14/A15/A16)	6G 4*4	5.9 ~ 6.5	-10.2	7.2	10.21
BLE/ZigBee Antenna List					
Omni (A18)		2.4 ~ 2.5		2.3	
Omni (A19)		2.4 ~ 2.5		5.5	

Notes:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax/be, not include 802.11a/b/g.
3. All the antennas use the cross-polarized design and the detail refers to antenna specification that is provided by the applicant

1.8. Description of Antenna RF Port

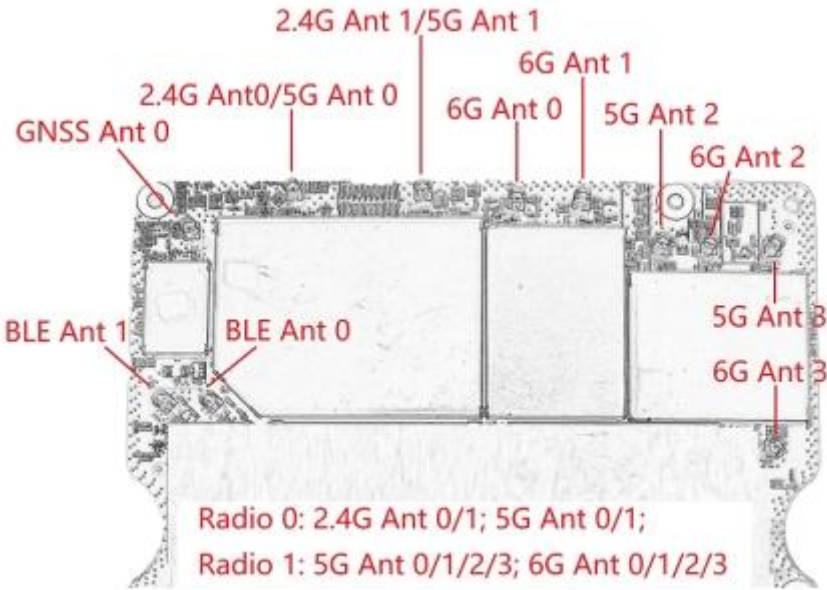				
Antenna Port	RF Spec.			
	Wi-Fi 2.4G	Wi-Fi 5G	Wi-Fi 6G	BLE/ZigBee
Ant 0	● (Radio 0)	● (Radio 0)	--	--
Ant 1	● (Radio 0)	● (Radio 0)	--	--
Ant 2	--	● (Radio 0)	--	--
Ant 3	--	● (Radio 0)	--	--
Ant 0	--	● (Radio 1)	--	--
Ant 1	--	● (Radio 1)	--	--
Ant 2	--	● (Radio 1)	--	--
Ant 3	--	● (Radio 1)	--	--
Ant 0	--	--	● (Radio 1)	--
Ant 1	--	--	● (Radio 1)	--
Ant 2	--	--	● (Radio 1)	--
Ant 3	--	--	● (Radio 1)	--
Ant 0	--	--	--	● (Core 0)
Ant 1	--	--	--	● (Core 1)
Ant 0	GNSS			

2. Test Configuration

2.1. Test Mode

Mode 1: Operating under AP mode (The ZWDFS feature enabled) (Radio 1 5G 4*4)
--

2.2. Test Channel

Test Mode	Test Channel	Test Frequency
802.11be-EHT80	58	5290 MHz
802.11be-EHT80	106	5530 MHz

2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407 Section (h)(2)
- KDB 905462 D02 v02
- KDB 905462 D04 v01

2.4. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75%RH

3. DFS Detection Thresholds and Radar Test Waveforms

3.1. Applicability

The following table from FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 lists the applicable requirements for the DFS testing.

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 3-1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Table 3-2: Applicability of DFS Requirements during normal operation

3.2. DFS Devices Requirements

Per FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 the following are the requirements for Master Devices:

- (a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 ~ 5350 MHz and 5470 ~ 5725 MHz bands. DFS is not required in the 5150 ~ 5250 MHz or 5725 ~ 5825 MHz bands.
- (b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- (c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- (d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- (e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- (f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- (g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

Channel Move Time and Channel Closing Transmission Time requirements are listed in the following table.

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 3-3: DFS Response Requirements

3.3. DFS Detection Threshold Values

The DFS detection thresholds are defined for Master devices and Client Devices with In-service monitoring.

These detection thresholds are listed in the following table.

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 3-4: Detection Thresholds for Master Devices and Client Devices with Radar Detection

3.4. Parameters of DFS Test Signals

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 3-6	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 3-5: Parameters for Short Pulse Radar Waveforms

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 3-6: Pulse Repetition Intervals Values for Test A

Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50 - 100	5 - 20	1000 - 2000	1 - 3	8 - 20	80%	30

Table 3-7: Parameters for Long Pulse Radar Waveforms

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses Per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

Table 3-8: Parameters for Frequency Hopping Radar Waveforms

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 - 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

3.5. Conducted Test Setup

The FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 describes a radiated test setup and a conducted test setup. The conducted test setup was used for this testing. Figure 3-1 shows the typical test setup.

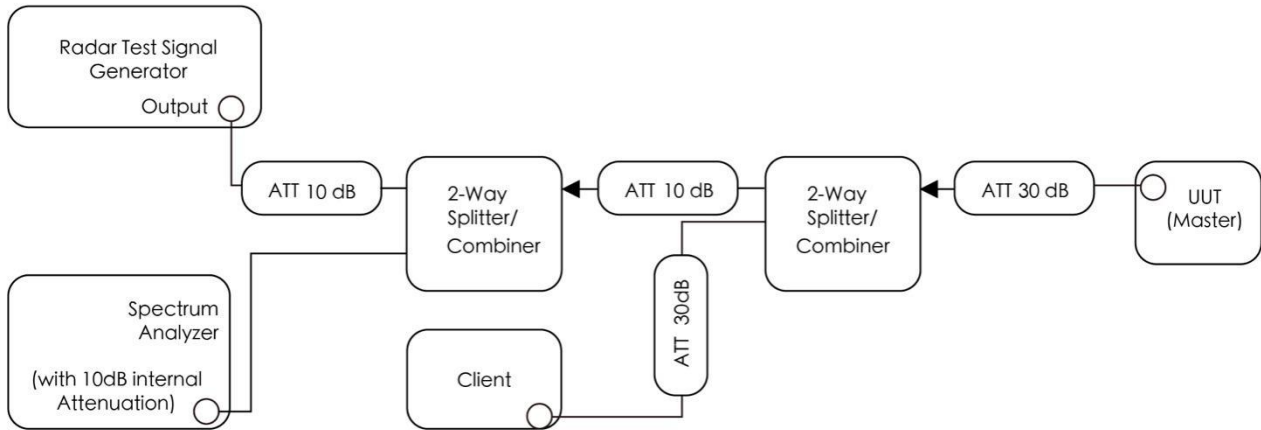


Figure 3-1: Conducted Test Setup where UUT is a Master and Radar Test Waveforms are injected into the Masters

4. Measuring Instrument

Instrument Name	Manufacturer	Model No.	Asset No.	Cali. Interval	Cal. Due Date	Test Site
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2026-09-28	SIP-TR1
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2026-10-16	SIP-TR1
Signal Generator	Keysight	N5182B	MRTSUE06605	1 year	2026-08-31	SIP-TR1

Client Information

Instrument	Manufacturer	Type No.	Certification Number
Wi-Fi Module	tp-link	Archer TBE550E	FCC ID: 2BCGWTBE550E

Software	Version	Manufacturer	Function
Signal Studio	V 2.4.0.0	Keysight	DFS Test Software

5. Test Result

5.1. Summary

Parameter	Verdict	Reference
NII Detection Bandwidth Measurement	Pass	Section 5.3
Channel Availability Check Time	Pass	Section 5.4
Statistical Performance Check	Pass	Section 5.5

Note: We used the worst-case level -63 dBm as DFS detection thresholds for all DFS testing.

5.2. Radar Waveform Calibration Measurement

5.2.1. Calibration Setup

The conducted test setup was used for this calibration testing. Figure 3-2 shows the typical test setup.

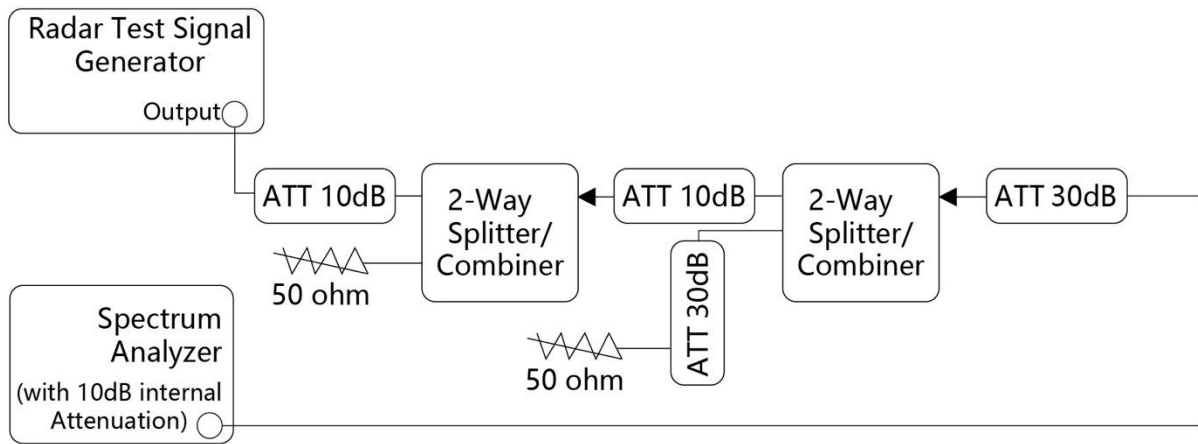


Figure 3-2: Conducted Test Setup

5.2.2. Calibration Procedure

The Interference Radar Detection Threshold Level is $(-64 \text{ dBm}) + (0) [\text{dBi}] + 1 \text{ dB} = -63 \text{ dBm}$ that had been taken into account the output power range and antenna gain. The above equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to at least 3 MHz. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $(-64 \text{ dBm}) + (0) [\text{dBi}] + 1 \text{ dB} = -63 \text{ dBm}$. Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

5.2.3. Calibration & Channel Loading Result

Refer to Appendix A.1&A.2.

5.3. NII Detection Bandwidth Measurement

5.3.1. Test Limit

Minimum 100% of the NII 99% transmission power bandwidth. During the U-NII Detection Bandwidth detection test, each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

5.3.2. Test Procedure

1. Adjust the equipment to produce a single Burst of any one of the Short Pulse Radar Types 0-4 in Table 3-5 at the center frequency of the EUT Operating Channel at the specified DFS Detection Threshold level.
2. The generating equipment is configured as shown in the Conducted Test Setup above section 3.5.
3. The EUT is set up as a stand-alone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio reflecting the worst case (maximum) that is user configurable during this test.
4. Generate a single radar Burst, and note the response of the EUT. Repeat for a minimum of 10 trials. The EUT must detect the Radar Waveform using the specified U-NII Detection Bandwidth criterion shown in Table 3-5. In cases where the channel bandwidth may exceed past the DFS band edge on specific channels (i.e., 802.11ac or wideband frame based systems) select a channel that has the entire emission bandwidth within the DFS band. If this is not possible, test the detection BW to the DFS band edge.
5. Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in Table 3-3. Repeat this measurement in 1 MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.
6. Starting at the center frequency of the EUT operating Channel, decrease the radar frequency in 1 MHz steps, repeating the above item 4 test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance.
7. The U-NII Detection Bandwidth is calculated as follows: $\text{U-NII Detection Bandwidth} = F_H - F_L$

8. The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.

5.3.3. Test Result

Refer to Appendix A.3.

5.4. Channel Availability Check Time Measurement

5.4.1. Test Limit

Channel Availability Check (CAC) Time $\geq 60s$

In the beginning or end of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.

5.4.2. Test Procedure

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. In the beginning of the Channel Availability Check (CAC) Time, A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at ZWDFS CAC activate.
3. In the end of the Channel Availability Check (CAC) Time, A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at ZWDFS CAC activate + 54 seconds.
4. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

5.4.3. Test Result

Refer to Appendix A.4.

5.5. Statistical Performance Check Measurement

5.5.1. Test Limit

The minimum percentage of successful detection requirements found in below table when a radar burst with a level equal to the DFS Detection Threshold + 1 dB is generated on the Operating Channel of the U-NII device (In- Service Monitoring).

Radar Type	Minimum Number of Trails	Detection Probability
0	30	$P_d \geq 60\%$
1	30(15 of test A and 15 of test B)	$P_d \geq 60\%$
2	30	$P_d \geq 60\%$
3	30	$P_d \geq 60\%$
4	30	$P_d \geq 60\%$
Aggregate (Radar Types 1-4)	120	$P_d \geq 80\%$
5	30	$P_d \geq 80\%$
6	30	$P_d \geq 70\%$

Note: The percentage of successful detection is calculated by:
 $(\text{Total Waveform Detections} / \text{Total Waveform Trails}) * 100 = \text{Probability of Detection Radar Waveform}$
In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows: $(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4$.

5.5.2. Test Procedure

1. Stream the MPEG test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
2. At time T0 the Radar Waveform generator sends the individual waveform for each of the Radar Types 1-6, at levels equal to the DFS Detection Threshold + 1 dB, on the Operating Channel.
3. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 0 to ensure detection occurs.
4. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
5. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.
6. The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in below table


5.5.3. Test Result

Refer to Appendix A.5.

Appendix A - Test Result

A.1 Calibration Test Result


Test Site	SIP-TR1	Test Engineer	Tom Chen
Test Date	2026-01-06	Test Item	Radar Waveform Calibration

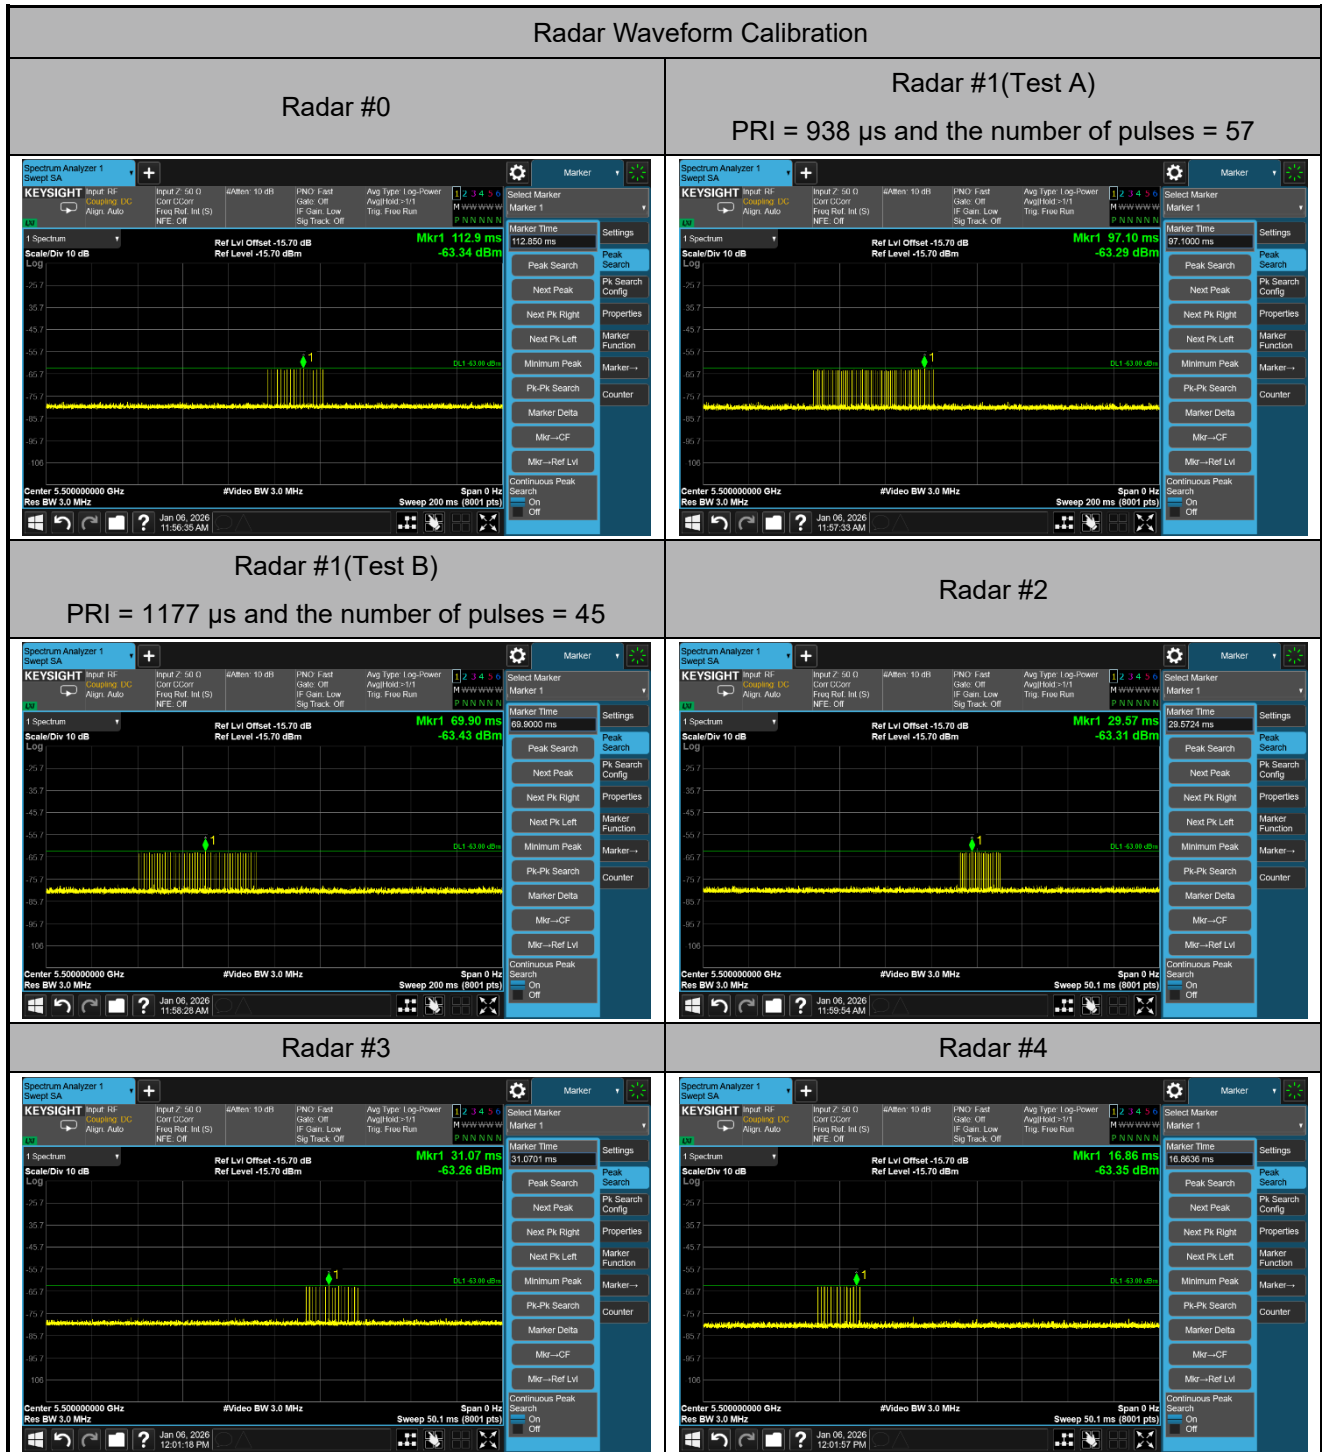



A.2 Channel Loading Test Result

Test Site	SIP-TR1	Test Engineer	Tom Chen
Test Date	2026-01-07	Test Item	Channel Loading

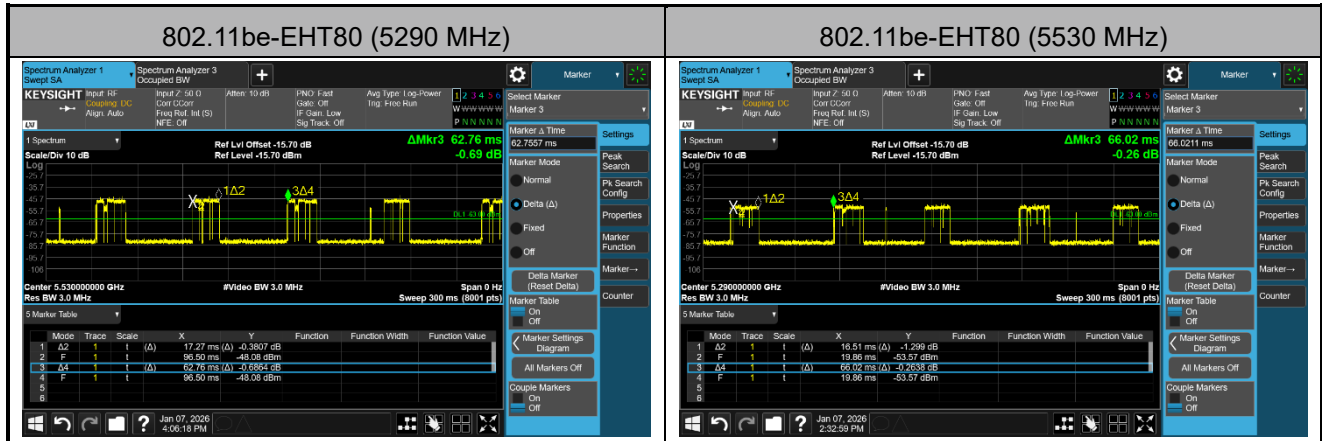

Test Mode	Test Frequency	Packet ratio	Requirement ratio	Test Result
802.11be-EHT80	5290 MHz	27.52%	≥ 17%	Pass
802.11be-EHT80	5530 MHz	25.01%	≥ 17%	Pass

Note: System testing was performed with the designated iperf test file. This file is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device.

Packet ratio = Time On / (Time On + Off Time).

A.3 NII Detection Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Tom Chen
Test Date	2026-01-08		
Test Item	Detection Bandwidth (802.11be-EHT80 mode - 5290 MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5250 F _L	1	1	1	1	1	1	1	1	1	1	100%
5255	1	1	1	1	1	1	1	1	1	1	100%
5260	1	1	1	1	1	1	1	1	1	1	100%
5265	1	1	1	1	1	1	1	1	1	1	100%
5270	1	1	1	1	1	1	1	1	1	1	100%
5275	1	1	1	1	1	1	1	1	1	1	100%
5280	1	1	1	1	1	1	1	1	1	1	100%
5285	1	1	1	1	1	1	1	1	1	1	100%
5290	1	1	1	1	1	1	1	1	1	1	100%
5295	1	1	1	1	1	1	1	1	1	1	100%
5300	1	1	1	1	1	1	1	1	1	1	100%
5305	1	1	1	1	1	1	1	1	1	1	100%
5310	1	1	1	1	1	1	1	1	1	1	100%
5315	1	1	1	1	1	1	1	1	1	1	100%
5320	1	1	1	1	1	1	1	1	1	1	100%
5325	1	1	1	1	1	1	1	1	1	1	100%
5330 F _H	1	1	1	1	1	1	1	1	1	1	100%
5331	0	0	0	0	0	0	0	0	0	0	0%

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5290 MHz. The 99% channel bandwidth is 77.222 MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5330 \text{ MHz} - 5250 \text{ MHz} = 80 \text{ MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): $77.222 \text{ MHz} \times 100\% = 77.222 \text{ MHz}$.

Test Site	SIP-TR1	Test Engineer	Tom Chen
Test Date	2026-01-08		
Test Item	Detection Bandwidth (802.11be-EHT80 mode - 5530 MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5489	0	0	0	0	0	0	0	0	0	0	0%
5490 F _L	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5510	1	1	1	1	1	1	1	1	1	1	100%
5515	1	1	1	1	1	1	1	1	1	1	100%
5520	1	1	1	1	1	1	1	1	1	1	100%
5525	1	1	1	1	1	1	1	1	1	1	100%
5530	1	1	1	1	1	1	1	1	1	1	100%
5535	1	1	1	1	1	1	1	1	1	1	100%
5540	1	1	1	1	1	1	1	1	1	1	100%
5545	1	1	1	1	1	1	1	1	1	1	100%
5550	1	1	1	1	1	1	1	1	1	1	100%
5555	1	1	1	1	1	1	1	1	1	1	100%
5560	1	1	1	1	1	1	1	1	1	1	100%
5565	1	1	1	1	1	1	1	1	1	1	100%
5570 F _H	1	1	1	1	1	1	1	1	1	1	100%
5571	0	0	0	0	0	0	0	0	0	0	0%

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5530 MHz. The 99% channel bandwidth is 77.176 MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5570 \text{ MHz} - 5490 \text{ MHz} = 80 \text{ MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): $77.176 \text{ MHz} \times 100\% = 77.176 \text{ MHz}$.

A.4 Channel Availability Check Time Test Result

Test Site	SIP-TR1	Test Engineer	Tom Chen
Test Date	2026-01-08		
Test Item	Channel Availability Check Time (802.11be-EHT80 mode - 5290MHz)		

Beginning of the Channel Availability Check Time
<pre>[2026-01-06 15:56:44.254] ~ # echo 60 4 2 > /proc/sys/dev/wifi0/zero wait dfs [2026-01-06 15:56:48.455] [304.621195] CONSOLE[w10]: 000263.618 w10: DFS: FCC-0 ##### RADAR SC DETECTED ON CHANNEL 60/80 ##### Intv=1428us, min pw=31 (1/20us), subband result=6, AT 2700MS [2026-01-06 15:56:48.637] [304.803590] CONSOLE[w10]: 000263.618 w10: ##### DETECTED A RADAR on Chanspec 0xe23a subband 0x6 type 10 on core 1</pre>
End of the Channel Availability Check Time
<pre>[2026-01-10 12:04:25.507] ~ # ~ # cat /proc/sys/dev/wifi0/zero wait dfs [2026-01-10 12:04:26.249] ch=0 [2026-01-10 12:04:26.254] ch ext=0 [2026-01-10 12:04:26.267] freq=-1 [2026-01-10 12:04:26.278] status=cac [2026-01-10 12:04:26.288] cac time=60 [2026-01-10 12:04:26.302] cac time remaining=5 [2026-01-10 12:04:26.323] radar cnt=0 [2026-01-10 12:04:26.339] ~ # [249.779557] CONSOLE[w10]: 000208.033 w10: DFS: FCC-0 ##### RADAR SC DETECTED ON CHANNEL 60/80 ##### Intv=1428us, min pw=31 (1/20us), subband result=6, AT 55350MS</pre>
Note: The Zero Wait DFS CAC does not transmit any data so no plot can be captured, therefore, test was performed using a log from the EUT, and the highlighted text is provided for clarification.



Test Site	SIP-TR1	Test Engineer	Tom Chen
Test Date	2026-01-08		
Test Item	Channel Availability Check Time (802.11be-EHT80 mode - 5530MHz)		

Beginning of the Channel Availability Check Time
<pre>[2026-01-06 17:01:18.520] ~ # echo 104 4 2 > /proc/sys/dev/wifi0/zero wait dfs [2026-01-06 17:01:23.421] [335.841301] CONSOLE[w10]: 000294.720 w10: DFS: FCC-0 ##### RADAR SC DETECTED ON CHANNEL 104/80 ##### Intv=1428us, min pw=34 (1/20us), subband result=6, AT 2700MS [2026-01-06 17:01:23.603] [336.024714] CONSOLE[w10]: 000294.720 w10: ##### DETECTED A RADAR on Chanspec 0xe16a subband 0x6 type 10 on core 1</pre>
End of the Channel Availability Check Time
<pre>[2026-01-06 17:13:23.579] ~ # ~ # cat /proc/sys/dev/wifi0/zero wait dfs [2026-01-06 17:13:24.062] ch=104 [2026-01-06 17:13:24.071] ch ext=4 [2026-01-06 17:13:24.080] freq=5530 [2026-01-06 17:13:24.094] status=cac [2026-01-06 17:13:24.105] cac time=60 [2026-01-06 17:13:24.118] cac time remaining=6 [2026-01-06 17:13:24.142] radar cnt=0 [2026-01-06 17:13:24.156] ~ # [274.587107] CONSOLE[w10]: 000233.535 w10: DFS: FCC-0 ##### RADAR SC DETECTED ON CHANNEL 104/80 ##### Intv=1428us, min pw=34 (1/20us), subband result=6, AT 54600MS [2026-01-06 17:13:25.100] [274.771553] CONSOLE[w10]: 000233.535 w10: ##### DETECTED A RADAR on Chanspec 0xe16a subband 0x6 type 10 on core 1</pre>
Note: The Zero Wait DFS CAC does not transmit any data so no plot can be captured, therefore, test was performed using a log from the EUT, and the highlighted text is provided for clarification.

A.5 Statistical Performance Check

Test Site	SIP-TR1	Test Engineer	Tom Chen
Test Date	2026-01-08		
Test Item	Radar Statistical Performance Check (802.11be-EHT80 - 5290 MHz)		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5309	1	5272	1	5323	1	5310	1
1	5264	1	5278	1	5253	1	5267	1
2	5258	1	5279	1	5311	1	5300	1
3	5272	1	5296	1	5250	0	5250	0
4	5250	1	5252	1	5291	1	5312	1
5	5330	0	5250	0	5260	1	5291	1
6	5319	1	5259	1	5292	1	5306	1
7	5313	1	5330	0	5330	0	5257	1
8	5320	1	5284	1	5280	1	5323	1
9	5272	1	5259	1	5311	1	5250	0
10	5250	1	5308	1	5294	1	5271	1
11	5314	1	5283	1	5316	1	5299	1
12	5294	1	5276	1	5315	1	5281	1
13	5272	1	5302	1	5307	1	5295	0
14	5269	1	5257	1	5301	1	5307	1
15	5303	1	5310	0	5314	1	5278	1
16	5265	1	5267	1	5251	0	5281	1
17	5314	1	5283	1	5290	1	5330	1
18	5289	1	5270	1	5313	1	5311	1
19	5294	1	5277	1	5301	1	5324	1
20	5304	1	5322	1	5280	1	5307	1
21	5289	1	5295	1	5282	1	5290	1
22	5270	1	5290	1	5305	1	5264	1
23	5285	1	5254	0	5297	1	5252	1
24	5290	1	5260	1	5300	0	5313	1
25	5275	1	5290	1	5305	1	5265	1
26	5307	1	5262	1	5252	1	5257	1
27	5264	1	5258	1	5302	1	5275	1



Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect
	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect
28	5283	1	5260	1	5287	1	5293	1
29	5269	1	5289	1	5283	1	5253	0
Probability:	96.7%		86.7%		86.7%		86.7%	
Aggregate:	89.2% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	558.0	95	53010.0	Download	0	Type 2	3.5	211.0	27	5697.0
Download	1	Type 1	1.0	818.0	65	53170.0	Download	1	Type 2	2.2	197.0	25	4925.0
Download	2	Type 1	1.0	938.0	57	53466.0	Download	2	Type 2	2.9	153.0	26	3978.0
Download	3	Type 1	1.0	698.0	76	53048.0	Download	3	Type 2	3.3	151.0	27	4077.0
Download	4	Type 1	1.0	598.0	89	53222.0	Download	4	Type 2	4.4	183.0	28	5124.0
Download	5	Type 1	1.0	518.0	102	52836.0	Download	5	Type 2	3.2	206.0	26	5356.0
Download	6	Type 1	1.0	618.0	86	53148.0	Download	6	Type 2	2.2	173.0	25	4325.0
Download	7	Type 1	1.0	898.0	59	52982.0	Download	7	Type 2	2.0	162.0	24	3888.0
Download	8	Type 1	1.0	678.0	78	52884.0	Download	8	Type 2	1.6	230.0	24	5520.0
Download	9	Type 1	1.0	3066.0	18	55188.0	Download	9	Type 2	4.6	157.0	29	4553.0
Download	10	Type 1	1.0	878.0	61	53558.0	Download	10	Type 2	4.3	195.0	28	5460.0
Download	11	Type 1	1.0	858.0	62	53196.0	Download	11	Type 2	1.4	210.0	23	4830.0
Download	12	Type 1	1.0	638.0	83	52954.0	Download	12	Type 2	1.5	202.0	24	4848.0
Download	13	Type 1	1.0	658.0	81	53298.0	Download	13	Type 2	3.8	163.0	27	4401.0
Download	14	Type 1	1.0	778.0	68	52904.0	Download	14	Type 2	3.0	222.0	26	5772.0
Download	15	Type 1	1.0	2734.0	20	54680.0	Download	15	Type 2	2.0	187.0	24	4488.0
Download	16	Type 1	1.0	2884.0	19	54796.0	Download	16	Type 2	3.9	207.0	28	5796.0
Download	17	Type 1	1.0	2768.0	20	55360.0	Download	17	Type 2	1.2	212.0	23	4876.0
Download	18	Type 1	1.0	1313.0	41	53833.0	Download	18	Type 2	4.8	160.0	29	4640.0
Download	19	Type 1	1.0	2026.0	27	54702.0	Download	19	Type 2	1.6	220.0	24	5280.0
Download	20	Type 1	1.0	2244.0	24	53856.0	Download	20	Type 2	2.6	168.0	25	4200.0
Download	21	Type 1	1.0	2746.0	20	54920.0	Download	21	Type 2	2.1	205.0	25	5125.0
Download	22	Type 1	1.0	2690.0	20	53960.0	Download	22	Type 2	2.3	224.0	25	5600.0
Download	23	Type 1	1.0	1461.0	37	54057.0	Download	23	Type 2	4.6	217.0	29	6293.0
Download	24	Type 1	1.0	2787.0	19	52953.0	Download	24	Type 2	1.7	218.0	24	5232.0
Download	25	Type 1	1.0	2865.0	19	54435.0	Download	25	Type 2	1.2	171.0	23	3933.0
Download	26	Type 1	1.0	1146.0	47	53862.0	Download	26	Type 2	4.3	150.0	28	4200.0
Download	27	Type 1	1.0	704.0	75	52800.0	Download	27	Type 2	4.4	223.0	28	6244.0
Download	28	Type 1	1.0	2705.0	20	54100.0	Download	28	Type 2	2.0	229.0	24	5496.0
Download	29	Type 1	1.0	2530.0	21	53130.0	Download	29	Type 2	4.2	219.0	28	6132.0



Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	8.5	358.0	17	6086.0	Download	0	Type 4	16.6	358.0	15	5370.0
Download	1	Type 3	7.2	384.0	16	6144.0	Download	1	Type 4	13.8	384.0	13	4992.0
Download	2	Type 3	7.9	399.0	17	6783.0	Download	2	Type 4	15.2	399.0	14	5586.0
Download	3	Type 3	8.3	382.0	17	6494.0	Download	3	Type 4	16.2	382.0	14	5348.0
Download	4	Type 3	9.4	296.0	18	5328.0	Download	4	Type 4	18.6	296.0	16	4736.0
Download	5	Type 3	8.2	408.0	17	6936.0	Download	5	Type 4	16.0	408.0	14	5712.0
Download	6	Type 3	7.2	362.0	16	5792.0	Download	6	Type 4	13.7	362.0	13	4706.0
Download	7	Type 3	7.0	347.0	16	5552.0	Download	7	Type 4	13.3	347.0	13	4511.0
Download	8	Type 3	6.6	341.0	16	5456.0	Download	8	Type 4	12.5	341.0	12	4092.0
Download	9	Type 3	9.6	352.0	18	6336.0	Download	9	Type 4	19.0	352.0	16	5632.0
Download	10	Type 3	9.3	248.0	18	4464.0	Download	10	Type 4	18.3	248.0	16	3968.0
Download	11	Type 3	6.4	370.0	16	5920.0	Download	11	Type 4	12.0	370.0	12	4440.0
Download	12	Type 3	6.5	427.0	16	6832.0	Download	12	Type 4	12.3	427.0	12	5124.0
Download	13	Type 3	8.8	449.0	18	8082.0	Download	13	Type 4	17.3	449.0	15	6735.0
Download	14	Type 3	8.0	340.0	17	5780.0	Download	14	Type 4	15.5	340.0	14	4760.0
Download	15	Type 3	7.0	271.0	16	4336.0	Download	15	Type 4	13.2	271.0	13	3523.0
Download	16	Type 3	8.9	228.0	18	4104.0	Download	16	Type 4	17.6	228.0	15	3420.0
Download	17	Type 3	6.2	433.0	16	6928.0	Download	17	Type 4	11.6	433.0	12	5196.0
Download	18	Type 3	9.8	471.0	18	8478.0	Download	18	Type 4	19.6	471.0	16	7536.0
Download	19	Type 3	6.6	326.0	16	5216.0	Download	19	Type 4	12.5	326.0	12	3912.0
Download	20	Type 3	7.6	262.0	17	4454.0	Download	20	Type 4	14.6	262.0	13	3406.0
Download	21	Type 3	7.1	439.0	16	7024.0	Download	21	Type 4	13.6	439.0	13	5707.0
Download	22	Type 3	7.3	313.0	17	5321.0	Download	22	Type 4	14.0	313.0	13	4069.0
Download	23	Type 3	9.6	379.0	18	6822.0	Download	23	Type 4	19.2	379.0	16	6064.0
Download	24	Type 3	6.7	240.0	16	3840.0	Download	24	Type 4	12.7	240.0	12	2880.0
Download	25	Type 3	6.2	232.0	16	3712.0	Download	25	Type 4	11.5	232.0	12	2784.0
Download	26	Type 3	9.3	278.0	18	5004.0	Download	26	Type 4	18.5	278.0	16	4448.0
Download	27	Type 3	9.4	391.0	18	7038.0	Download	27	Type 4	18.7	391.0	16	6256.0
Download	28	Type 3	7.0	447.0	16	7152.0	Download	28	Type 4	13.3	447.0	13	5811.0
Download	29	Type 3	9.2	361.0	18	6498.0	Download	29	Type 4	18.2	361.0	15	5415.0



Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5290	1	15	5255	1
1	5290	1	16	5258	1
2	5290	1	17	5254	1
3	5290	1	18	5259	1
4	5290	1	19	5254	1
5	5290	1	20	5324	1
6	5290	1	21	5325	1
7	5290	1	22	5325	1
8	5290	1	23	5321	1
9	5290	1	24	5325	1
10	5258	1	25	5326	1
11	5254	1	26	5321	1
12	5254	1	27	5321	1
13	5258	1	28	5325	1
14	5257	1	29	5322	1
Detection Percentage (%)			100.0%		

Type 5 Radar Waveform_0

Download	0	Type 5	16	0.7500000	12.0000000	5.290000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	644577.0	81.0	14	2	1640.0	1554.0	-
		1	79033.0	65.4	14	1	1891.0	-	-
		2	259953.0	73.2	14	2	1580.0	1804.0	-
		3	441268.0	78.6	14	2	1722.0	1260.0	-
		4	620619.0	92.0	14	3	1843.0	1335.0	1994.0
		5	56620.0	77.7	14	2	1288.0	1444.0	-
		6	238369.0	65.2	14	1	1121.0	-	-
		7	419942.0	62.9	14	1	1217.0	-	-
		8	601623.0	58.2	14	1	1120.0	-	-
		9	34260.0	94.3	14	3	1259.0	1072.0	1179.0
		10	215049.0	90.5	14	3	1210.0	1277.0	1918.0
		11	397188.0	56.0	14	1	1940.0	-	-
		12	579230.0	57.2	14	1	1147.0	-	-
		13	11952.0	84.9	14	3	1151.0	1815.0	1014.0
		14	193316.0	75.1	14	2	1112.0	1200.0	-
		15	375148.0	62.3	14	1	1327.0	-	-

Type 5 Radar Waveform_1

Download	1	Type 5	12	1.0000000	12.0000000	5.290000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	740150.0	86.4	9	3	1929.0	1201.0	1529.0
		1	984293.0	53.4	9	1	1879.0	-	-
		2	227811.0	97.4	9	3	1445.0	1261.0	1082.0
		3	470560.0	58.4	9	1	1377.0	-	-
		4	711462.0	69.8	9	2	1646.0	1546.0	-
		5	954398.0	64.5	9	1	1960.0	-	-
		6	198106.0	66.9	9	2	1881.0	1626.0	-
		7	439551.0	95.1	9	3	1256.0	1233.0	1552.0
		8	682536.0	59.4	9	1	1945.0	-	-
		9	924702.0	53.2	9	1	1830.0	-	-
		10	168217.0	91.4	9	3	1917.0	1254.0	1044.0
		11	409440.0	92.7	9	3	1872.0	1725.0	1313.0

Type 5 Radar Waveform_2

Download	2	Type 5	14	0.8571429	12.0000000	5.290000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	559451.0	62.8	12	1	1702.0	-	-
		1	763590.0	89.6	12	3	1660.0	1993.0	1767.0
		2	118941.0	52.8	12	1	1790.0	-	-
		3	326363.0	65.3	12	1	1863.0	-	-
		4	534012.0	55.1	12	1	1516.0	-	-
		5	741403.0	64.7	12	1	1661.0	-	-
		6	93024.0	92.1	12	3	1793.0	1761.0	1567.0
		7	300363.0	72.5	12	2	1931.0	1209.0	-
		8	508735.0	63.5	12	1	1038.0	-	-
		9	715091.0	73.3	12	2	1135.0	1428.0	-
		10	67827.0	56.1	12	1	1888.0	-	-
		11	274429.0	95.2	12	3	1252.0	1651.0	1545.0
		12	482652.0	59.0	12	1	1937.0	-	-
		13	688791.0	75.5	12	2	1916.0	1601.0	-

Type 5 Radar Waveform_3

Download	3	Type 5	15	0.80000000	12.00000000	5.2900000000			
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
0	39389.0	71.6	14	2	1329.0	1838.0	-		
1	233170.0	55.1	14	1	1372.0	-	-		
2	425057.0	91.6	14	3	1665.0	1675.0	1410.0		
3	620135.0	55.2	14	1	1912.0	-	-		
4	15618.0	55.3	14	1	1407.0	-	-		
5	208526.0	93.3	14	3	1132.0	1561.0	1677.0		
6	402361.0	76.0	14	2	1639.0	1009.0	-		
7	594712.0	90.0	14	3	1097.0	1821.0	1110.0		
8	788489.0	67.2	14	2	1597.0	1695.0	-		
9	185159.0	75.6	14	2	1378.0	1262.0	-		
10	378319.0	78.4	14	2	1320.0	1792.0	-		
11	571770.0	74.9	14	2	1033.0	1828.0	-		
12	766493.0	64.4	14	1	1411.0	-	-		
13	161545.0	66.5	14	1	1620.0	-	-		
14	354213.0	98.6	14	3	1021.0	1018.0	1746.0		

Type 5 Radar Waveform_4

Download	4	Type 5	18	0.66666667	12.00000000	5.2900000000			
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
0	456008.0	78.1	18	2	1392.0	1897.0	-		
1	617174.0	69.2	18	2	1714.0	1278.0	-		
2	114238.0	88.7	18	3	1943.0	1104.0	1239.0		
3	275047.0	86.4	18	3	1383.0	1102.0	1413.0		
4	436085.0	72.5	18	2	1799.0	1650.0	-		
5	598586.0	50.0	18	1	1616.0	-	-		
6	94627.0	68.7	18	2	1498.0	1549.0	-		
7	254948.0	91.4	18	3	1408.0	1832.0	1435.0		
8	416670.0	75.1	18	2	1340.0	1474.0	-		
9	579201.0	50.8	18	1	1061.0	-	-		
10	74657.0	92.6	18	3	1747.0	1067.0	1518.0		
11	234854.0	92.8	18	3	1835.0	1885.0	1849.0		
12	397748.0	52.5	18	1	1292.0	-	-		
13	556858.0	98.9	18	3	1080.0	1364.0	1543.0		
14	55131.0	63.1	18	1	1184.0	-	-		
15	215604.0	97.4	18	3	1247.0	1237.0	1550.0		
16	377536.0	52.2	18	1	1880.0	-	-		
17	536142.0	99.4	18	3	1611.0	1565.0	1944.0		

Type 5 Radar Waveform_5

Download	5	Type 5	15	0.80000000	12.00000000	5.2900000000			
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
0	42117.0	94.4	13	3	1218.0	1718.0	1925.0		
1	235071.0	92.9	13	3	1429.0	1537.0	1532.0		
2	429464.0	61.7	13	1	1787.0	-	-		
3	623307.0	53.5	13	1	1465.0	-	-		
4	18441.0	54.2	13	1	1497.0	-	-		
5	211160.0	98.0	13	3	1588.0	1933.0	1525.0		
6	404171.0	98.1	13	3	1584.0	1403.0	1647.0		
7	599790.0	66.6	13	1	1013.0	-	-		
8	791850.0	72.8	13	2	1361.0	1384.0	-		
9	187860.0	72.3	13	2	1812.0	1333.0	-		
10	381291.0	77.3	13	2	1107.0	1685.0	-		
11	573918.0	87.0	13	3	1251.0	1336.0	1205.0		
12	767890.0	80.3	13	2	1731.0	1162.0	-		
13	164471.0	50.2	13	1	1119.0	-	-		
14	357406.0	75.6	13	2	1351.0	1595.0	-		

Type 5 Radar Waveform_6

☐	Download	6	Type 5	11	1.0909091	12.0000000	5.290000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	751675.0	73.9	9	2	1659.0	1348.0	—
			1	1013838.0	85.4	9	3	1570.0	1467.0	1778.0
			2	191675.0	54.0	9	1	1865.0	—	—
			3	455013.0	67.4	9	2	1914.0	1836.0	—
			4	719904.0	58.8	9	1	1905.0	—	—
			5	981855.0	86.6	9	3	1312.0	1519.0	1472.0
			6	158964.0	75.4	9	2	1181.0	1887.0	—
			7	423494.0	52.8	9	1	1283.0	—	—
			8	687425.0	63.8	9	1	1818.0	—	—
			9	952029.0	66.4	9	1	1286.0	—	—
			10	126594.0	54.3	9	1	1969.0	—	—

Type 5 Radar Waveform_7

☐	Download	7	Type 5	11	1.0909091	12.0000000	5.290000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	390879.0	62.8	9	1	1458.0	—	—
			1	655304.0	50.4	9	1	1129.0	—	—
			2	918357.0	73.5	9	2	1412.0	1202.0	—
			3	93843.0	91.2	9	3	1127.0	1420.0	1957.0
			4	358442.0	54.1	9	1	1126.0	—	—
			5	621253.0	78.3	9	2	1824.0	1919.0	—
			6	884932.0	76.1	9	2	1985.0	1750.0	—
			7	61472.0	75.5	9	2	1024.0	1984.0	—
			8	325215.0	70.0	9	2	1679.0	1688.0	—
			9	588838.0	73.6	9	2	1644.0	1983.0	—
			10	852177.0	86.8	9	3	1989.0	1068.0	1030.0

Type 5 Radar Waveform_8

☐	Download	8	Type 5	10	1.2000000	12.0000000	5.290000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	31871.0	74.6	7	2	1915.0	1315.0	—
			1	322495.0	64.9	7	1	1856.0	—	—
			2	611544.0	90.8	7	3	1953.0	1293.0	1619.0
			3	901550.0	88.3	7	3	1663.0	1298.0	1706.0
			4	1194152.0	55.9	7	1	1962.0	—	—
			5	286307.0	77.2	7	2	1609.0	1894.0	—
			6	576146.0	96.4	7	3	1564.0	1264.0	1402.0
			7	868214.0	64.0	7	1	1390.0	—	—
			8	1155630.0	88.1	7	3	1574.0	1975.0	1238.0
			9	250692.0	70.6	7	2	1781.0	1105.0	—

Type 5 Radar Waveform_9

☐	Download	9	Type 5	19	0.6315789	12.0000000	5.290000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	283259.0	92.3	19	3	1859.0	1770.0	1196.0
			1	436455.0	67.2	19	2	1635.0	1478.0	—
			2	589253.0	78.6	19	2	1232.0	1481.0	—
			3	113099.0	63.5	19	1	1643.0	—	—
			4	266025.0	59.0	19	1	1295.0	—	—
			5	417733.0	79.9	19	2	1813.0	1221.0	—
			6	569166.0	93.5	19	3	1657.0	1032.0	1457.0
			7	94267.0	62.8	19	1	1728.0	—	—
			8	246883.0	69.0	19	2	1022.0	1070.0	—
			9	398189.0	90.0	19	3	1385.0	1124.0	1732.0
			10	549301.0	98.0	19	3	1864.0	1972.0	1587.0
			11	75041.0	87.1	19	3	1507.0	1697.0	1942.0
			12	227034.0	100.0	19	3	1617.0	1618.0	1736.0
			13	378754.0	85.1	19	3	1848.0	1689.0	1851.0
			14	531227.0	97.7	19	3	1720.0	1228.0	1730.0
			15	56393.0	93.2	19	3	1381.0	1504.0	1522.0
			16	208978.0	81.7	19	2	1354.0	1623.0	—
			17	361170.0	68.2	19	2	1935.0	1500.0	—
			18	512512.0	99.0	19	3	1216.0	1711.0	1735.0

Type 5 Radar Waveform_10

☐	Download	10	Type 5	18	0.6666667	12.0000000	5.258000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	39948.0	60.9	17	1	1334.0	—	—
			1	201143.0	54.7	17	1	1893.0	—	—
			2	361351.0	80.3	17	2	1980.0	1786.0	—
			3	524158.0	51.9	17	1	1185.0	—	—
			4	19964.0	87.2	17	3	1608.0	1449.0	1858.0
			5	181480.0	60.8	17	1	1174.0	—	—
			6	341297.0	89.2	17	3	1186.0	1950.0	1116.0
			7	502556.0	76.6	17	2	1909.0	1547.0	—
			8	195.0	70.5	17	2	1883.0	1857.0	—
			9	161156.0	80.7	17	2	1631.0	1363.0	—
			10	321110.0	98.2	17	3	1827.0	1442.0	1801.0
			11	484513.0	56.5	17	1	1025.0	—	—
			12	642488.0	99.8	17	3	1956.0	1386.0	1253.0
			13	141469.0	78.3	17	2	1337.0	1003.0	—
			14	301654.0	83.7	17	3	1319.0	1167.0	1907.0
			15	462888.0	70.6	17	2	1826.0	1690.0	—
			16	623724.0	83.2	17	2	1638.0	1877.0	—
			17	121025.0	94.9	17	3	1911.0	1924.0	1769.0

Type 5 Radar Waveform_11

☐	Download	11	Type 5	9	1.3333333	12.0000000	5.254000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	566531.0	77.7	6	2	1092.0	1131.0	—
			1	887933.0	95.2	6	3	1662.0	1152.0	1555.0
			2	1210821.0	98.4	6	3	1153.0	1422.0	1166.0
			3	203884.0	82.7	6	2	1456.0	1060.0	—
			4	527195.0	62.7	6	1	1137.0	—	—
			5	850017.0	51.0	6	1	1572.0	—	—
			6	1170026.0	83.6	6	3	1544.0	1600.0	1817.0
			7	163735.0	88.9	6	3	1979.0	1930.0	1782.0
			8	486351.0	87.5	6	3	1096.0	1005.0	1892.0

Type 5 Radar Waveform_12

☐	Download	12	Type 5	9	1.3333333	12.0000000	5.254000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	810133.0	65.0	7	1	1733.0	—	—
			1	1133492.0	55.7	7	1	1258.0	—	—
			2	124206.0	90.7	7	3	1034.0	1825.0	1404.0
			3	447480.0	62.7	7	1	1487.0	—	—
			4	768620.0	95.6	7	3	1700.0	1852.0	1175.0
			5	1092386.0	78.2	7	2	1854.0	1001.0	—
			6	84692.0	65.0	7	1	1257.0	—	—
			7	407083.0	77.2	7	2	1630.0	1847.0	—
			8	730699.0	65.9	7	1	1501.0	—	—

Type 5 Radar Waveform_13

☐	Download	13	Type 5	17	0.7058824	12.0000000	5.258000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	557570.0	61.9	16	1	1145.0	—	—
			1	23738.0	65.3	16	1	1592.0	—	—
			2	193788.0	91.5	16	3	1633.0	1530.0	1190.0
			3	365520.0	52.6	16	1	1290.0	—	—
			4	535378.0	69.8	16	2	1400.0	1240.0	—
			5	2698.0	53.3	16	1	1443.0	—	—
			6	173305.0	72.9	16	2	1414.0	1011.0	—
			7	343575.0	82.2	16	2	1978.0	1144.0	—
			8	513911.0	70.9	16	2	1279.0	1988.0	—
			9	682885.0	83.5	16	3	1365.0	1694.0	1678.0
			10	151869.0	98.3	16	3	1494.0	1321.0	1553.0
			11	323393.0	58.8	16	1	1353.0	—	—
			12	494449.0	66.2	16	1	1089.0	—	—
			13	664751.0	64.5	16	1	1759.0	—	—
			14	131406.0	64.4	16	1	1721.0	—	—
			15	300778.0	98.4	16	3	1197.0	1822.0	1987.0
			16	472888.0	54.0	16	1	1842.0	—	—

Type 5 Radar Waveform_14

☐	Download	14	Type 5	14	0.8571429	12.0000000	5.257000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	781192.0	73.1	13	2	1499.0	1142.0	—
			1	134096.0	50.6	13	1	1604.0	—	—
			2	341088.0	78.2	13	2	1350.0	1515.0	—
			3	547005.0	92.0	13	3	1649.0	1768.0	1430.0
			4	754516.0	79.2	13	2	1941.0	1999.0	—
			5	108449.0	68.3	13	2	1250.0	1049.0	—
			6	315181.0	98.4	13	3	1489.0	1248.0	1172.0
			7	522283.0	73.3	13	2	1712.0	1926.0	—
			8	730046.0	74.2	13	2	1287.0	1460.0	—
			9	82825.0	70.9	13	2	1878.0	1308.0	—
			10	289900.0	79.9	13	2	1775.0	1520.0	—
			11	497099.0	67.9	13	2	1301.0	1798.0	—
			12	705219.0	52.5	13	1	1901.0	—	—
			13	57332.0	78.3	13	2	1693.0	1223.0	—

Type 5 Radar Waveform_15

Download	15	Type 5	11	1.0909091	12.0000000	5.255000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	336163.0	84.7	8	3	1502.0	1803.0	1973.0
		1	601517.0	51.0	8	1	1557.0	-	-
		2	864782.0	67.8	8	2	1614.0	1123.0	-
		3	40583.0	58.6	8	1	1192.0	-	-
		4	304394.0	67.9	8	2	1505.0	1401.0	-
		5	568959.0	53.3	8	1	1586.0	-	-
		6	832422.0	75.0	8	2	1268.0	1275.0	-
		7	8021.0	75.3	8	2	1053.0	1039.0	-
		8	271473.0	95.1	8	3	1488.0	1784.0	1306.0
		9	536543.0	59.8	8	1	1328.0	-	-
		10	799465.0	80.6	8	2	1150.0	1995.0	-

Type 5 Radar Waveform_16

Download	16	Type 5	17	0.7058824	12.0000000	5.258000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	687159.0	80.2	16	2	1455.0	1447.0	-
		1	154955.0	50.1	16	1	1622.0	-	-
		2	324262.0	90.6	16	3	1928.0	1464.0	1469.0
		3	495550.0	78.7	16	2	1583.0	1479.0	-
		4	665044.0	98.8	16	3	1015.0	1391.0	1671.0
		5	133433.0	91.2	16	3	1051.0	1437.0	1668.0
		6	303816.0	76.2	16	2	1974.0	1738.0	-
		7	475299.0	64.4	16	1	1958.0	-	-
		8	642984.0	91.6	16	3	1594.0	1810.0	1866.0
		9	112853.0	55.1	16	1	1765.0	-	-
		10	283550.0	64.4	16	1	1948.0	-	-
		11	452682.0	99.1	16	3	1599.0	1074.0	1745.0
		12	623652.0	73.9	16	2	1783.0	1686.0	-
		13	91614.0	82.8	16	2	1629.0	1704.0	-
		14	261402.0	97.1	16	3	1486.0	1701.0	1760.0
		15	431676.0	93.2	16	3	1468.0	1637.0	1395.0
		16	603148.0	79.3	16	2	1099.0	1811.0	-

Type 5 Radar Waveform_17

Download	17	Type 5	8	1.5000000	12.0000000	5.254000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	150340.0	95.7	6	3	1524.0	1666.0	1284.0
		1	513312.0	82.4	6	2	1998.0	1719.0	-
		2	875956.0	93.0	6	3	1244.0	1207.0	1868.0
		3	1240817.0	64.2	6	1	1648.0	-	-
		4	105774.0	68.3	6	2	1141.0	1755.0	-
		5	469330.0	55.1	6	1	1424.0	-	-
		6	832869.0	63.6	6	1	1267.0	-	-
		7	1195993.0	57.7	6	1	1726.0	-	-

Type 5 Radar Waveform_18

☐	Download	18	Type 5	20	0.6000000	12.0000000	5.259000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	24264.0	98.4	20	3	1729.0	1739.0	1510.0
			1	169606.0	55.8	20	1	1342.0	—	—
			2	313042.0	96.5	20	3	1724.0	1389.0	1571.0
			3	458080.0	95.0	20	3	1531.0	1280.0	1020.0
			4	6504.0	79.0	20	2	1598.0	1961.0	—
			5	150909.0	97.8	20	3	1157.0	1749.0	1642.0
			6	297047.0	55.5	20	1	1076.0	—	—
			7	441232.0	68.3	20	2	1273.0	1255.0	—
			8	587400.0	61.4	20	1	1242.0	—	—
			9	133196.0	99.1	20	3	1409.0	1590.0	1211.0
			10	278022.0	68.1	20	2	1621.0	1884.0	—
			11	424410.0	57.7	20	1	1079.0	—	—
			12	566740.0	94.7	20	3	1776.0	1111.0	1269.0
			13	115601.0	75.4	20	2	1245.0	1910.0	—
			14	260641.0	79.7	20	2	1208.0	1291.0	—
			15	406155.0	53.6	20	1	1613.0	—	—
			16	551665.0	53.5	20	1	1198.0	—	—
			17	98097.0	61.0	20	1	1164.0	—	—
			18	242607.0	73.2	20	2	1789.0	1163.0	—
			19	387656.0	70.2	20	2	1454.0	1118.0	—

Type 5 Radar Waveform_19

☐	Download	19	Type 5	10	1.2000000	12.0000000	5.254000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	1068212.0	52.0	7	1	1656.0	—	—
			1	160156.0	94.0	7	3	1302.0	1415.0	1533.0
			2	450566.0	75.9	7	2	1788.0	1393.0	—
			3	740896.0	70.8	7	2	1453.0	1624.0	—
			4	1032855.0	60.2	7	1	1143.0	—	—
			5	124342.0	95.7	7	3	1936.0	1332.0	1867.0
			6	414963.0	79.6	7	2	1375.0	1370.0	—
			7	705804.0	62.6	7	1	1949.0	—	—
			8	995608.0	66.9	7	2	1548.0	1316.0	—
			9	88891.0	66.4	7	1	1831.0	—	—

Type 5 Radar Waveform_20

☐	Download	20	Type 5	13	0.9230769	12.0000000	5.324000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	291891.0	61.8	11	1	1473.0	—	—
			1	514252.0	95.0	11	3	1043.0	1206.0	1294.0
			2	737296.0	77.0	11	2	1795.0	1710.0	—
			3	40773.0	70.9	11	2	1534.0	1482.0	—
			4	264449.0	50.3	11	1	1158.0	—	—
			5	485985.0	85.3	11	3	1982.0	1230.0	1834.0
			6	710156.0	79.8	11	2	1740.0	1338.0	—
			7	13284.0	69.4	11	2	1236.0	1977.0	—
			8	236908.0	62.5	11	1	1155.0	—	—
			9	460161.0	57.3	11	1	1840.0	—	—
			10	684099.0	58.8	11	1	1154.0	—	—
			11	906301.0	80.8	11	2	1528.0	1041.0	—
			12	209233.0	62.5	11	1	1744.0	—	—

Type 5 Radar Waveform_21

☐	Download	21	Type 5	11	1.0909091	12.0000000	5.325000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	510297.0	83.7	9	3	1212.0	1203.0	1899.0
			1	775122.0	78.9	9	2	1475.0	1026.0	—
			2	1037802.0	85.4	9	3	1325.0	1317.0	1214.0
			3	214132.0	84.7	9	3	1742.0	1495.0	1939.0
			4	478296.0	70.2	9	2	1632.0	1636.0	—
			5	743444.0	52.6	9	1	1274.0	—	—
			6	1005059.0	89.3	9	3	1314.0	1373.0	1459.0
			7	182313.0	60.7	9	1	1491.0	—	—
			8	446490.0	57.2	9	1	1593.0	—	—
			9	709841.0	82.0	9	2	1692.0	1193.0	—
			10	971512.0	93.4	9	3	1853.0	1898.0	1602.0

Type 5 Radar Waveform_22

☐	Download	22	Type 5	12	1.0000000	12.0000000	5.325000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	137251.0	55.7	10	1	1625.0	—	—
			1	379410.0	54.4	10	1	1569.0	—	—
			2	620971.0	80.0	10	2	1008.0	1508.0	—
			3	962010.0	75.7	10	2	1819.0	1717.0	—
			4	107054.0	84.8	10	3	1751.0	1439.0	1889.0
			5	349087.0	83.3	10	2	1757.0	1227.0	—
			6	590780.0	68.1	10	2	1837.0	1374.0	—
			7	831664.0	92.9	10	3	1471.0	1673.0	1084.0
			8	77645.0	51.4	10	1	1042.0	—	—
			9	318966.0	95.1	10	3	1265.0	1069.0	1698.0
			10	560471.0	87.2	10	3	1483.0	1480.0	1156.0
			11	802793.0	73.2	10	2	1951.0	1188.0	—

Type 5 Radar Waveform_23

☐	Download	23	Type 5	19	0.6315789	12.0000000	5.321000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	30092.0	80.7	19	2	1355.0	1362.0	—
			1	182681.0	73.7	19	2	1083.0	1394.0	—
			2	335010.0	75.0	19	2	1802.0	1140.0	—
			3	486628.0	94.5	19	3	1388.0	1195.0	1450.0
			4	11292.0	73.9	19	2	1777.0	1682.0	—
			5	163424.0	84.2	19	3	1405.0	1850.0	1000.0
			6	315958.0	98.5	19	3	1065.0	1088.0	1330.0
			7	469781.0	65.8	19	1	1485.0	—	—
			8	622831.0	61.4	19	1	1249.0	—	—
			9	145133.0	71.2	19	2	1028.0	1276.0	—
			10	297411.0	81.5	19	2	1743.0	1281.0	—
			11	448286.0	92.2	19	3	1908.0	1913.0	1396.0
			12	599857.0	92.0	19	3	1628.0	1990.0	1955.0
			13	126245.0	74.8	19	2	1299.0	1446.0	—
			14	279241.0	61.0	19	1	1654.0	—	—
			15	432119.0	59.4	19	1	1506.0	—	—
			16	585397.0	60.0	19	1	1004.0	—	—
			17	107369.0	77.6	19	2	2000.0	1272.0	—
			18	260601.0	55.6	19	1	1222.0	—	—

Type 5 Radar Waveform_24

Download	24	Type 5	10	1.2000000	12.0000000	5.325000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	785976.0	54.6	8	1	1773.0	—	—
		1	1076773.0	63.0	8	1	1562.0	—	—
		2	168526.0	83.7	8	3	1655.0	1800.0	1427.0
		3	459731.0	65.2	8	1	1358.0	—	—
		4	748141.0	96.0	8	3	1339.0	1952.0	1737.0
		5	1041082.0	55.3	8	1	1433.0	—	—
		6	133154.0	54.0	8	1	1895.0	—	—
		7	423022.0	84.6	8	3	1115.0	1461.0	1326.0
		8	714007.0	79.3	8	2	1369.0	1035.0	—
		9	1001903.0	89.2	8	3	1541.0	1922.0	1991.0

Type 5 Radar Waveform_25

Download	25	Type 5	8	1.5000000	12.0000000	5.326000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	121750.0	65.9	6	1	1774.0	—	—
		1	484880.0	79.3	6	2	1263.0	1243.0	—
		2	847899.0	67.5	6	2	1762.0	1045.0	—
		3	1209320.0	96.6	6	3	1699.0	1920.0	1265.0
		4	76995.0	55.7	6	1	1703.0	—	—
		5	440334.0	54.7	6	1	1860.0	—	—
		6	803901.0	60.9	6	1	1448.0	—	—
		7	1165348.0	95.2	6	3	1862.0	1078.0	1073.0

Type 5 Radar Waveform_26

Download	26	Type 5	18	0.6666667	12.0000000	5.321000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	14307.0	58.2	18	1	1681.0	—	—
		1	175561.0	65.4	18	1	1779.0	—	—
		2	336051.0	76.6	18	2	1568.0	1723.0	—
		3	498274.0	58.7	18	1	1512.0	—	—
		4	660072.0	66.1	18	1	1031.0	—	—
		5	155494.0	82.0	18	2	1615.0	1036.0	—
		6	316144.0	84.5	18	3	1048.0	1368.0	1062.0
		7	477112.0	73.0	18	2	1542.0	1764.0	—
		8	637108.0	87.9	18	3	1846.0	1054.0	1331.0
		9	135241.0	83.7	18	3	1324.0	1785.0	1577.0
		10	297166.0	60.0	18	1	1612.0	—	—
		11	457857.0	72.2	18	2	1397.0	1094.0	—
		12	620170.0	58.7	18	1	1171.0	—	—
		13	115664.0	82.9	18	2	1964.0	1581.0	—
		14	276891.0	73.9	18	2	1463.0	1125.0	—
		15	436266.0	89.4	18	3	1966.0	1423.0	1753.0
		16	596605.0	82.6	18	2	1873.0	1165.0	—
		17	96155.0	60.2	18	1	1462.0	—	—

Type 5 Radar Waveform_27

☐	Download	27	Type 5	19	0.6315789	12.0000000	5.321000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	242508.0	97.1	18	3	1871.0	1575.0	1627.0
			1	396980.0	58.5	18	1	1063.0	—	—
			2	548264.0	79.1	18	2	1513.0	1426.0	—
			3	71891.0	89.1	18	3	1794.0	1023.0	1845.0
			4	224620.0	69.8	18	2	1484.0	1270.0	—
			5	376230.0	99.6	18	3	1380.0	1379.0	1496.0
			6	529378.0	69.2	18	2	1360.0	1705.0	—
			7	53256.0	76.6	18	2	1870.0	1696.0	—
			8	205359.0	95.5	18	3	1297.0	1235.0	1674.0
			9	357634.0	92.0	18	3	1059.0	1271.0	1670.0
			10	512033.0	63.9	18	1	1303.0	—	—
			11	34470.0	95.7	18	3	1452.0	1019.0	1539.0
			12	186524.0	86.2	18	3	1106.0	1605.0	1805.0
			13	339659.0	70.0	18	2	1149.0	1418.0	—
			14	493189.0	50.1	18	1	1322.0	—	—
			15	15795.0	64.2	18	1	1077.0	—	—
			16	168637.0	51.7	18	1	1357.0	—	—
			17	321641.0	62.2	18	1	1052.0	—	—
			18	473239.0	79.1	18	2	1741.0	1071.0	—

Type 5 Radar Waveform_28

☐	Download	28	Type 5	11	1.0909091	12.0000000	5.325000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	1080575.0	95.9	9	3	1963.0	1229.0	1906.0
			1	258522.0	96.9	9	3	1134.0	1055.0	1160.0
			2	523326.0	51.7	9	1	1191.0	—	—
			3	786287.0	80.8	9	2	1352.0	1680.0	—
			4	1050810.0	73.0	9	2	1282.0	1047.0	—
			5	226261.0	67.5	9	2	1241.0	1006.0	—
			6	490121.0	70.3	9	2	1170.0	1466.0	—
			7	753371.0	74.6	9	2	1809.0	1823.0	—
			8	1018704.0	57.0	9	1	1886.0	—	—
			9	193714.0	80.5	9	2	1199.0	1182.0	—
			10	457765.0	83.1	9	2	1180.0	1086.0	—

Type 5 Radar Waveform_29

Download	29	Type 5	18	0.6666667	12.0000000	5.322000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	441026.0	55.4	17	1	1493.0	—	—
		1	601047.0	78.2	17	2	1756.0	1177.0	—
		2	98505.0	63.9	17	1	1477.0	—	—
		3	258900.0	95.6	17	3	1146.0	1128.0	1596.0
		4	420852.0	57.7	17	1	1970.0	—	—
		5	582709.0	52.4	17	1	1231.0	—	—
		6	78578.0	66.1	17	1	1938.0	—	—
		7	239365.0	69.1	17	2	1416.0	1716.0	—
		8	399541.0	95.6	17	3	1844.0	1440.0	1095.0
		9	561089.0	77.0	17	2	1763.0	1526.0	—
		10	58528.0	89.6	17	3	1347.0	1607.0	1159.0
		11	219050.0	89.5	17	3	1820.0	1138.0	1664.0
		12	379571.0	86.5	17	3	1796.0	1016.0	1890.0
		13	539972.0	92.6	17	3	1896.0	1406.0	1579.0
		14	38911.0	59.0	17	1	1100.0	—	—
		15	199424.0	92.2	17	3	1027.0	1707.0	1382.0
		16	359906.0	97.6	17	3	1641.0	1610.0	1246.0
		17	520738.0	90.0	17	3	1509.0	1345.0	1344.0



Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	1	16	1
2	1	17	1
3	1	18	1
4	1	19	1
5	1	20	1
6	1	21	1
7	1	22	1
8	1	23	1
9	1	24	1
10	1	25	1
11	1	26	1
12	1	27	1
13	1	28	1
14	1	29	1
Detection Percentage (%)		100.0%	

Type 6 Radar Waveform_0

☐	Download	0	Type 6	1.0	333.3	9	0.3333	300.0000000	14
			Frequency List (MHz)	0	1	2	3	4	
			0	5290	5581	5364	5301	5487	
			5	5548	5534	5338	5686	5708	
			10	5637	5448	5368	5710	5437	
			15	5504	5330	5347	5512	5556	
			20	5553	5400	5554	5608	5279	
			25	5673	5419	5270	5488	5594	
			30	5470	5664	5402	5491	5688	
			35	5396	5277	5345	5691	5425	
			40	5698	5466	5603	5699	5515	
			45	5685	5633	5327	5615	5438	
			50	5623	5508	5374	5578	5272	
			55	5658	5697	5462	5258	5288	
			60	5293	5703	5526	5655	5671	
			65	5618	5367	5298	5485	5558	
			70	5684	5322	5392	5401	5677	
			75	5505	5459	5519	5668	5695	
			80	5503	5669	5406	5464	5477	
			85	5666	5560	5305	5705	5683	
			90	5387	5575	5423	5625	5520	
			95	5585	5264	5362	5678	5412	

Type 6 Radar Waveform_1

☐	Download	1	Type 6	1.0	333.3	9	0.3333	300.0000000	18
			Frequency List (MHz)	0	1	2	3	4	
			0	5545	5345	5300	5462	5707	
			5	5590	5556	5413	5374	5440	
			10	5471	5334	5409	5430	5458	
			15	5592	5457	5450	5460	5273	
			20	5561	5566	5495	5600	5252	
			25	5442	5525	5434	5304	5627	
			30	5580	5427	5404	5554	5311	
			35	5372	5289	5356	5530	5508	
			40	5636	5609	5697	5628	5398	
			45	5293	5594	5380	5405	5314	
			50	5324	5559	5704	5575	5425	
			55	5612	5412	5281	5417	5635	
			60	5713	5632	5352	5601	5494	
			65	5567	5403	5377	5264	5308	
			70	5681	5716	5579	5662	5649	
			75	5472	5516	5570	5461	5672	
			80	5666	5499	5365	5325	5551	
			85	5438	5348	5718	5315	5526	
			90	5619	5621	5719	5310	5625	
			95	5268	5531	5333	5323	5285	

Type 6 Radar Waveform_2

☐	Download	2	Type 6	1.0	333.3	9	0.3333	300.0000000	11
			Frequency List (MHz)	0	1	2	3	4	
			0	5703	5584	5711	5623	5549	
			5	5632	5481	5488	5537	5647	
			10	5402	5598	5547	5528	5479	
			15	5680	5487	5553	5505	5562	
			20	5472	5635	5533	5689	5700	
			25	5330	5377	5253	5338	5669	
			30	5469	5384	5619	5328	5509	
			35	5511	5395	5560	5583	5270	
			40	5369	5688	5574	5374	5694	
			45	5557	5378	5376	5652	5433	
			50	5292	5568	5500	5610	5415	
			55	5398	5648	5566	5478	5675	
			60	5546	5325	5280	5464	5653	
			65	5695	5516	5342	5340	5542	
			70	5450	5294	5684	5565	5353	
			75	5498	5346	5699	5708	5630	
			80	5724	5626	5706	5259	5260	
			85	5458	5392	5569	5341	5517	
			90	5596	5441	5480	5629	5406	
			95	5483	5299	5268	5683	5507	

Type 6 Radar Waveform_3

☐	Download	3	Type 6	1.0	333.3	9	0.3333	300.0000000	21
			Frequency List (MHz)	0	1	2	3	4	
			0	5483	5348	5647	5309	5294	
			5	5296	5503	5563	5700	5476	
			10	5333	5387	5588	5723	5500	
			15	5293	5614	5656	5550	5279	
			20	5480	5326	5474	5681	5673	
			25	5596	5456	5264	5372	5711	
			30	5358	5341	5262	5329	5553	
			35	5583	5356	5659	5305	5512	
			40	5691	5389	5459	5710	5486	
			45	5557	5444	5676	5661	5504	
			50	5696	5361	5423	5695	5297	
			55	5646	5675	5490	5576	5590	
			60	5518	5465	5378	5539	5345	
			65	5522	5280	5414	5457	5693	
			70	5344	5376	5611	5404	5261	
			75	5487	5323	5587	5472	5658	
			80	5388	5709	5384	5443	5369	
			85	5645	5635	5288	5592	5354	
			90	5252	5581	5259	5624	5282	
			95	5313	5349	5300	5617	5314	

Type 6 Radar Waveform_4

☐	Download	4	Type 6	1.0	333.3	9	0.3333	300.0000000	15
			Frequency List (MHz)	0	1	2	3	4	
			0	5263	5587	5583	5373	5611	
			5	5338	5428	5638	5291	5683	
			10	5642	5651	5629	5443	5521	
			15	5284	5266	5498	5471	5488	
			20	5395	5415	5295	5646	5484	
			25	5653	5659	5368	5309	5375	
			30	5344	5298	5477	5254	5527	
			35	5692	5674	5724	5511	5670	
			40	5619	5379	5450	5688	5318	
			45	5542	5671	5539	5444	5320	
			50	5377	5712	5593	5519	5635	
			55	5452	5410	5591	5520	5707	
			60	5655	5645	5603	5402	5536	
			65	5719	5414	5382	5334	5623	
			70	5594	5363	5312	5305	5416	
			75	5662	5367	5422	5592	5656	
			80	5274	5268	5386	5355	5404	
			85	5472	5597	5351	5329	5349	
			90	5397	5617	5459	5335	5641	
			95	5624	5548	5604	5409	5711	

Type 6 Radar Waveform_5

☐	Download	5	Type 6	1.0	333.3	9	0.3333	300.0000000	11
			Frequency List (MHz)	0	1	2	3	4	
			0	5518	5448	5519	5534	5356	
			5	5380	5450	5713	5454	5415	
			10	5573	5440	5670	5638	5542	
			15	5372	5393	5290	5543	5663	
			20	5399	5561	5453	5287	5619	
			25	5275	5602	5387	5472	5343	
			30	5417	5708	5255	5692	5406	
			35	5347	5520	5664	5584	5458	
			40	5462	5388	5522	5685	5625	
			45	5318	5254	5495	5709	5671	
			50	5553	5288	5682	5720	5482	
			55	5640	5331	5600	5410	5491	
			60	5361	5345	5590	5532	5325	
			65	5363	5353	5592	5604	5426	
			70	5349	5315	5490	5281	5375	
			75	5487	5565	5433	5384	5524	
			80	5654	5449	5352	5599	5439	
			85	5411	5521	5390	5657	5500	
			90	5647	5430	5489	5464	5317	
			95	5474	5680	5655	5339	5706	

Type 6 Radar Waveform_6

Download	6	Type 6	1.0	333.3	9	0.3333	300.0000000	19
		Frequency List (MHz)	0	1	2	3	4	
		0	5298	5687	5455	5695	5673	
		5	5519	5375	5313	5617	5622	
		10	5407	5326	5711	5358	5563	
		15	5460	5520	5393	5588	5380	
		20	5630	5394	5376	5592	5638	
		25	5454	5493	5377	5459	5597	
		30	5432	5655	5545	5495	5381	
		35	5316	5439	5498	5297	5642	
		40	5287	5304	5554	5708	5312	
		45	5548	5596	5450	5254	5339	
		50	5543	5426	5353	5285	5315	
		55	5607	5462	5490	5510	5632	
		60	5364	5626	5428	5268	5389	
		65	5424	5496	5360	5335	5415	
		70	5635	5334	5503	5611	5651	
		75	5685	5494	5305	5343	5609	
		80	5349	5319	5278	5281	5374	
		85	5616	5657	5402	5541	5477	
		90	5665	5275	5595	5347	5506	
		95	5301	5372	5704	5308	5475	

Type 6 Radar Waveform_7

Download	7	Type 6	1.0	333.3	9	0.3333	300.0000000	19
		Frequency List (MHz)	0	1	2	3	4	
		0	5456	5451	5391	5381	5418	
		5	5561	5397	5388	5305	5338	
		10	5590	5277	5584	5548	5550	
		15	5496	5633	5572	5415	5321	
		20	5335	5368	5565	5429	5306	
		25	5696	5302	5411	5598	5583	
		30	5644	5332	5365	5537	5472	
		35	5587	5592	5509	5708	5250	
		40	5642	5527	5301	5483	5278	
		45	5316	5273	5601	5386	5326	
		50	5430	5390	5482	5366	5541	
		55	5714	5505	5426	5433	5619	
		60	5675	5577	5671	5452	5471	
		65	5469	5261	5425	5634	5291	
		70	5410	5529	5663	5611	5293	
		75	5375	5252	5279	5632	5462	
		80	5507	5672	5346	5514	5695	
		85	5434	5333	5525	5453	5314	
		90	5355	5281	5532	5359	5523	
		95	5574	5285	5270	5683	5673	

Type 6 Radar Waveform_8

Download	8	Type 6	1.0	333.3	9	0.3333	300.0000000	20
		Frequency List (MHz)	0	1	2	3	4	
		0	5711	5690	5327	5542	5260	
		5	5603	5322	5463	5371	5658	
		10	5269	5379	5318	5651	5605	
		15	5539	5677	5599	5581	5289	
		20	5326	5487	5373	5457	5538	
		25	5317	5255	5424	5406	5445	
		30	5640	5472	5601	5290	5660	
		35	5676	5480	5270	5423	5547	
		40	5333	5580	5670	5298	5315	
		45	5636	5399	5331	5654	5273	
		50	5606	5441	5571	5664	5692	
		55	5254	5668	5695	5720	5307	
		60	5365	5522	5503	5375	5417	
		65	5292	5685	5364	5466	5688	
		70	5404	5518	5512	5587	5252	
		75	5344	5275	5422	5613	5617	
		80	5342	5671	5343	5709	5656	
		85	5537	5397	5525	5490	5407	
		90	5562	5495	5520	5287	5566	
		95	5454	5468	5540	5629	5366	

Type 6 Radar Waveform_9

Download	9	Type 6	1.0	333.3	9	0.3333	300.0000000	12
		Frequency List (MHz)	0	1	2	3	4	
		0	5491	5454	5263	5703	5480	
		5	5645	5344	5538	5534	5390	
		10	5578	5643	5359	5371	5626	
		15	5627	5329	5702	5481	5334	
		20	5556	5314	5449	5511	5680	
		25	5582	5510	5479	5682	5361	
		30	5558	5505	5258	5383	5340	
		35	5276	5423	5337	5386	5513	
		40	5518	5435	5295	5719	5616	
		45	5482	5389	5707	5553	5307	
		50	5492	5660	5539	5442	5622	
		55	5410	5278	5305	5530	5467	
		60	5335	5676	5363	5493	5634	
		65	5400	5453	5521	5264	5563	
		70	5686	5313	5395	5468	5594	
		75	5394	5630	5598	5420	5718	
		80	5526	5559	5379	5360	5620	
		85	5358	5458	5693	5685	5293	
		90	5503	5714	5557	5684	5350	
		95	5541	5544	5617	5691	5604	

Type 6 Radar Waveform_10

☐	Download	10	Type 6	1.0	333.3	9	0.3333	300.0000000	17
			Frequency List (MHz)	0	1	2	3	4	
			0	5271	5693	5674	5389	5322	
			5	5309	5269	5613	5697	5694	
			10	5509	5432	5497	5566	5647	
			15	5715	5456	5708	5671	5295	
			20	5342	5722	5255	5538	5581	
			25	5471	5531	5355	5711	5513	
			30	5346	5347	5515	5720	5507	
			35	5678	5382	5367	5547	5673	
			40	5348	5700	5596	5675	5292	
			45	5551	5565	5350	5285	5425	
			50	5332	5483	5543	5274	5688	
			55	5630	5576	5503	5261	5724	
			60	5434	5695	5264	5502	5406	
			65	5316	5583	5339	5508	5345	
			70	5294	5376	5621	5588	5539	
			75	5645	5660	5611	5575	5646	
			80	5265	5379	5427	5721	5559	
			85	5318	5420	5337	5323	5412	
			90	5375	5299	5537	5589	5334	
			95	5536	5523	5414	5620	5341	

Type 6 Radar Waveform_11

☐	Download	11	Type 6	1.0	333.3	9	0.3333	300.0000000	9
			Frequency List (MHz)	0	1	2	3	4	
			0	5429	5457	5610	5453	5542	
			5	5351	5291	5688	5385	5426	
			10	5440	5318	5538	5286	5668	
			15	5328	5583	5336	5716	5487	
			20	5253	5316	5293	5530	5554	
			25	5359	5383	5461	5340	5547	
			30	5388	5711	5472	5363	5659	
			35	5401	5521	5458	5262	5539	
			40	5679	5394	5386	5480	5576	
			45	5648	5408	5690	5683	5594	
			50	5460	5511	5330	5721	5693	
			55	5555	5695	5563	5454	5571	
			60	5425	5352	5517	5532	5375	
			65	5718	5615	5475	5536	5459	
			70	5624	5437	5515	5604	5629	
			75	5635	5657	5556	5423	5591	
			80	5546	5712	5441	5462	5432	
			85	5666	5463	5356	5540	5402	
			90	5478	5698	5319	5415	5434	
			95	5405	5348	5612	5715	5553	

Type 6 Radar Waveform_12

Download	12	Type 6	1.0	333.3	9	0.3333	300.0000000	15
		Frequency List (MHz)	0	1	2	3	4	
		0	5684	5696	5546	5614	5287	
		5	5393	5691	5288	5451	5633	
		10	5274	5582	5579	5384	5689	
		15	5319	5613	5439	5664	5679	
		20	5261	5482	5709	5619	5527	
		25	5625	5332	5444	5581	5430	
		30	5697	5429	5578	5433	5660	
		35	5549	5711	5504	5651	5475	
		40	5583	5383	5409	5556	5256	
		45	5466	5294	5577	5559	5360	
		50	5645	5334	5434	5484	5408	
		55	5374	5569	5692	5550	5399	
		60	5403	5251	5298	5340	5481	
		65	5411	5410	5278	5608	5445	
		70	5724	5286	5394	5563	5501	
		75	5280	5325	5537	5675	5388	
		80	5416	5609	5636	5365	5574	
		85	5443	5624	5631	5417	5604	
		90	5531	5705	5508	5263	5710	
		95	5432	5335	5290	5646	5632	

Type 6 Radar Waveform_13

Download	13	Type 6	1.0	333.3	9	0.3333	300.0000000	15
		Frequency List (MHz)	0	1	2	3	4	
		0	5464	5460	5482	5300	5604	
		5	5435	5713	5363	5614	5462	
		10	5680	5371	5620	5579	5710	
		15	5407	5265	5542	5709	5396	
		20	5269	5551	5650	5611	5500	
		25	5513	5659	5392	5548	5615	
		30	5472	5586	5386	5318	5585	
		35	5419	5324	5640	5507	5279	
		40	5662	5314	5467	5270	5348	
		45	5380	5716	5536	5339	5524	
		50	5347	5367	5338	5696	5638	
		55	5535	5596	5622	5438	5598	
		60	5571	5540	5346	5715	5344	
		65	5649	5719	5541	5430	5350	
		70	5285	5302	5556	5431	5252	
		75	5610	5370	5522	5470	5303	
		80	5518	5452	5498	5672	5294	
		85	5706	5453	5365	5416	5406	
		90	5341	5499	5280	5254	5395	
		95	5414	5722	5429	5383	5705	

Type 6 Radar Waveform_14

Download	14	Type 6	1.0	333.3	9	0.3333	300.0000000	16
		Frequency List (MHz)	0	1	2	3	4	
		0	5719	5699	5418	5461	5349	
		5	5574	5638	5438	5302	5669	
		10	5611	5635	5661	5299	5256	
		15	5495	5392	5645	5279	5588	
		20	5277	5717	5688	5700	5473	
		25	5304	5511	5595	5274	5649	
		30	5475	5343	5533	5359	5714	
		35	5366	5353	5303	5432	5576	
		40	5628	5550	5683	5377	5419	
		45	5422	5485	5400	5254	5689	
		50	5615	5272	5252	5358	5540	
		55	5335	5313	5390	5405	5386	
		60	5542	5287	5364	5379	5592	
		65	5572	5374	5417	5255	5362	
		70	5346	5481	5342	5423	5514	
		75	5596	5607	5608	5453	5357	
		80	5606	5648	5268	5258	5466	
		85	5436	5464	5528	5549	5560	
		90	5420	5479	5361	5484	5603	
		95	5720	5428	5636	5696	5692	

Type 6 Radar Waveform_15

Download	15	Type 6	1.0	333.3	9	0.3333	300.0000000	14
		Frequency List (MHz)	0	1	2	3	4	
		0	5499	5463	5354	5622	5666	
		5	5616	5660	5513	5465	5401	
		10	5445	5424	5702	5494	5277	
		15	5583	5519	5651	5305	5663	
		20	5311	5629	5692	5446	5667	
		25	5460	5323	5378	5683	5653	
		30	5461	5300	5511	5534	5505	
		35	5444	5671	5585	5490	5467	
		40	5633	5524	5353	5374	5477	
		45	5399	5543	5453	5565	5316	
		50	5438	5656	5387	5523	5724	
		55	5503	5684	5482	5507	5570	
		60	5331	5471	5301	5708	5328	
		65	5325	5327	5464	5637	5500	
		70	5355	5686	5322	5440	5560	
		75	5577	5384	5621	5709	5675	
		80	5420	5603	5368	5268	5672	
		85	5429	5628	5332	5376	5272	
		90	5250	5287	5539	5448	5501	
		95	5602	5551	5451	5631	5442	

Type 6 Radar Waveform_16

Download	16	Type 6	1.0	333.3	9	0.3333	300.0000000	18
		Frequency List (MHz)	0	1	2	3	4	
		0	5657	5702	5290	5308	5411	
		5	5658	5682	5588	5628	5705	
		10	5376	5688	5268	5689	5298	
		15	5574	5646	5279	5272	5497	
		20	5671	5477	5570	5306	5419	
		25	5555	5312	5526	5482	5717	
		30	5695	5350	5257	5391	5285	
		35	5644	5535	5467	5360	5404	
		40	5403	5338	5462	5496	5371	
		45	5406	5379	5601	5506	5441	
		50	5492	5374	5527	5479	5331	
		55	5711	5678	5693	5356	5636	
		60	5260	5276	5303	5699	5654	
		65	5291	5277	5361	5634	5259	
		70	5343	5615	5486	5358	5399	
		75	5663	5703	5558	5256	5490	
		80	5364	5483	5600	5563	5514	
		85	5489	5723	5297	5427	5549	
		90	5567	5415	5529	5450	5547	
		95	5395	5594	5432	5581	5618	

Type 6 Radar Waveform_17

Download	17	Type 6	1.0	333.3	9	0.3333	300.0000000	18
		Frequency List (MHz)	0	1	2	3	4	
		0	5437	5466	5701	5469	5253	
		5	5700	5607	5663	5694	5685	
		10	5574	5309	5312	5319	5662	
		15	5676	5382	5317	5311	5679	
		20	5643	5511	5298	5392	5346	
		25	5261	5632	5586	5276	5359	
		30	5714	5689	5606	5552	5686	
		35	5626	5263	5513	5415	5717	
		40	5421	5400	5465	5335	5671	
		45	5562	5462	5695	5668	5425	
		50	5616	5680	5653	5327	5290	
		55	5318	5610	5525	5697	5589	
		60	5397	5369	5529	5621	5687	
		65	5472	5458	5384	5652	5358	
		70	5627	5371	5539	5413	5366	
		75	5271	5431	5597	5283	5549	
		80	5356	5452	5440	5640	5381	
		85	5322	5580	5535	5484	5429	
		90	5683	5412	5649	5394	5463	
		95	5569	5497	5506	5264	5303	

Type 6 Radar Waveform_18

Download	18	Type 6	1.0	333.3	9	0.3333	300.0000000	14
		Frequency List (MHz)	0	1	2	3	4	
		0	5692	5705	5637	5630	5473	
		5	5364	5629	5263	5382	5644	
		10	5616	5363	5447	5507	5340	
		15	5275	5328	5485	5362	5503	
		20	5590	5712	5549	5387	5365	
		25	5709	5588	5360	5312	5310	
		30	5401	5700	5646	5346	5686	
		35	5350	5717	5631	5666	5329	
		40	5556	5504	5338	5501	5462	
		45	5642	5339	5279	5620	5515	
		50	5558	5571	5369	5476	5597	
		55	5586	5519	5298	5419	5442	
		60	5351	5643	5315	5650	5336	
		65	5676	5421	5424	5381	5458	
		70	5461	5611	5628	5317	5596	
		75	5331	5417	5520	5665	5379	
		80	5527	5595	5706	5594	5575	
		85	5295	5512	5632	5605	5432	
		90	5570	5488	5270	5541	5311	
		95	5695	5429	5704	5497	5292	

Type 6 Radar Waveform_19

Download	19	Type 6	1.0	333.3	9	0.3333	300.0000000	15
		Frequency List (MHz)	0	1	2	3	4	
		0	5472	5469	5573	5694	5315	
		5	5406	5554	5338	5545	5473	
		10	5547	5627	5488	5702	5361	
		15	5363	5455	5588	5310	5695	
		20	5598	5403	5490	5379	5500	
		25	5440	5563	5416	5344	5443	
		30	5589	5603	5464	5570	5489	
		35	5430	5427	5441	5718	5395	
		40	5587	5276	5644	5459	5571	
		45	5319	5362	5678	5568	5348	
		50	5447	5527	5326	5541	5703	
		55	5540	5691	5269	5548	5280	
		60	5683	5371	5274	5613	5599	
		65	5372	5411	5453	5561	5460	
		70	5604	5468	5451	5560	5501	
		75	5345	5308	5284	5294	5494	
		80	5295	5452	5612	5475	5252	
		85	5386	5343	5435	5329	5543	
		90	5481	5665	5421	5600	5331	
		95	5446	5611	5434	5297	5660	

Type 6 Radar Waveform_20

Download	20	Type 6	1.0	333.3	9	0.3333	300.0000000	11
		Frequency List (MHz)	0	1	2	3	4	
		0	5630	5330	5509	5380	5535	
		5	5448	5576	5413	5708	5680	
		10	5381	5416	5529	5422	5382	
		15	5354	5582	5594	5355	5412	
		20	5606	5472	5431	5468	5311	
		25	5388	5389	5291	5520	5378	
		30	5575	5560	5679	5612	5293	
		35	5628	5521	5698	5254	5709	
		40	5292	5689	5409	5456	5403	
		45	5299	5445	5639	5621	5710	
		50	5323	5721	5578	5505	5624	
		55	5494	5406	5618	5580	5678	
		60	5339	5548	5718	5583	5622	
		65	5527	5564	5309	5437	5571	
		70	5482	5597	5502	5454	5491	
		75	5490	5551	5444	5438	5591	
		80	5506	5600	5650	5489	5453	
		85	5341	5465	5563	5303	5703	
		90	5310	5426	5658	5316	5359	
		95	5573	5376	5364	5474	5428	

Type 6 Radar Waveform_21

Download	21	Type 6	1.0	333.3	9	0.3333	300.0000000	12
		Frequency List (MHz)	0	1	2	3	4	
		0	5410	5569	5445	5541	5377	
		5	5490	5501	5488	5299	5412	
		10	5312	5680	5570	5617	5403	
		15	5442	5612	5697	5400	5604	
		20	5517	5638	5469	5460	5284	
		25	5654	5716	5494	5624	5464	
		30	5419	5289	5588	5670	5272	
		35	5643	5645	5375	5627	5649	
		40	5453	5332	5657	5528	5674	
		45	5500	5577	5422	5629	5594	
		50	5350	5448	5596	5354	5589	
		55	5709	5610	5510	5498	5578	
		60	5637	5497	5347	5378	5686	
		65	5694	5513	5664	5633	5556	
		70	5669	5309	5691	5274	5463	
		75	5374	5345	5515	5685	5355	
		80	5393	5636	5306	5391	5267	
		85	5326	5290	5656	5426	5713	
		90	5450	5394	5546	5461	5282	
		95	5331	5508	5424	5395	5601	

Type 6 Radar Waveform_22

☐	Download	22	Type 6	1.0	333.3	9	0.3333	300.0000000	17
			Frequency List (MHz)	0	1	2	3	4	
			0	5665	5333	5381	5702	5597	
			5	5629	5523	5563	5462	5619	
			10	5718	5566	5611	5715	5424	
			15	5530	5264	5325	5445	5321	
			20	5525	5707	5410	5549	5257	
			25	5542	5600	5253	5446	5666	
			30	5353	5474	5634	5538	5408	
			35	5334	5703	5387	5522	5557	
			40	5484	5458	5565	5414	5547	
			45	5261	5637	5280	5252	5453	
			50	5598	5680	5683	5648	5654	
			55	5317	5402	5311	5560	5363	
			60	5300	5615	5342	5324	5524	
			65	5383	5285	5489	5388	5596	
			70	5667	5482	5532	5628	5278	
			75	5714	5320	5444	5626	5722	
			80	5601	5679	5580	5485	5405	
			85	5258	5710	5558	5256	5649	
			90	5442	5515	5455	5662	5460	
			95	5595	5559	5594	5449	5359	

Type 6 Radar Waveform_23

☐	Download	23	Type 6	1.0	333.3	9	0.3333	300.0000000	14
			Frequency List (MHz)	0	1	2	3	4	
			0	5445	5572	5317	5388	5439	
			5	5671	5448	5638	5625	5552	
			10	5355	5652	5435	5618	5391	
			15	5428	5393	5513	5533	5398	
			20	5351	5541	5705	5430	5517	
			25	5328	5454	5383	5330	5339	
			30	5431	5277	5690	5606	5473	
			35	5319	5658	5675	5568	5323	
			40	5406	5557	5544	5617	5316	
			45	5716	5683	5329	5299	5256	
			50	5297	5471	5598	5505	5356	
			55	5501	5467	5531	5492	5465	
			60	5560	5649	5470	5564	5395	
			65	5322	5495	5540	5292	5460	
			70	5582	5670	5709	5411	5587	
			75	5359	5463	5522	5403	5260	
			80	5382	5368	5643	5482	5697	
			85	5636	5521	5614	5396	5288	
			90	5344	5620	5668	5397	5477	
			95	5571	5708	5407	5514	5354	

Type 6 Radar Waveform_24

Download	24	Type 6	1.0	333.3	9	0.3333	300.0000000	14
		Frequency List (MHz)	0	1	2	3	4	
		0	5603	5336	5253	5549	5659	
		5	5713	5470	5313	5655	5483	
		10	5619	5693	5630	5466	5609	
		15	5518	5531	5438	5705	5444	
		20	5467	5389	5678	5696	5369	
		25	5558	5417	5372	5703	5388	
		30	5492	5464	5426	5515	5410	
		35	5454	5353	5482	5637	5721	
		40	5344	5322	5541	5497	5597	
		45	5399	5299	5261	5539	5680	
		50	5475	5307	5294	5445	5596	
		55	5310	5594	5664	5405	5621	
		60	5505	5578	5548	5513	5387	
		65	5358	5327	5335	5570	5532	
		70	5568	5295	5546	5479	5509	
		75	5503	5370	5638	5328	5382	
		80	5636	5491	5484	5543	5447	
		85	5536	5542	5296	5431	5262	
		90	5250	5462	5595	5252	5500	
		95	5640	5724	5612	5556	5489	

Type 6 Radar Waveform_25

Download	25	Type 6	1.0	333.3	9	0.3333	300.0000000	17
		Frequency List (MHz)	0	1	2	3	4	
		0	5383	5575	5664	5710	5501	
		5	5280	5395	5313	5379	5387	
		10	5414	5408	5259	5350	5487	
		15	5697	5645	5537	5483	5519	
		20	5452	5633	5330	5622	5651	
		25	5584	5318	5662	5451	5592	
		30	5345	5707	5616	5624	5654	
		35	5598	5347	5603	5396	5573	
		40	5329	5282	5562	5538	5577	
		45	5482	5357	5314	5459	5358	
		50	5572	5495	5389	5309	5264	
		55	5376	5275	5320	5547	5410	
		60	5374	5588	5293	5394	5702	
		65	5373	5701	5554	5298	5407	
		70	5363	5505	5563	5599	5652	
		75	5484	5335	5480	5419	5391	
		80	5612	5539	5333	5544	5260	
		85	5447	5401	5362	5475	5302	
		90	5368	5619	5267	5517	5579	
		95	5625	5479	5268	5568	5706	

Type 6 Radar Waveform_26

Download	26	Type 6	1.0	333.3	9	0.3333	300.0000000	20
		Frequency List (MHz)	0	1	2	3	4	
		0	5638	5339	5600	5299	5721	
		5	5419	5417	5388	5542	5691	
		10	5723	5672	5397	5545	5508	
		15	5310	5675	5640	5528	5711	
		20	5460	5702	5271	5624	5375	
		25	5645	5462	5291	5485	5456	
		30	5578	5302	5447	5390	5444	
		35	5318	5689	5618	5281	5407	
		40	5412	5695	5327	5535	5258	
		45	5557	5565	5367	5335	5352	
		50	5409	5661	5497	5693	5499	
		55	5347	5307	5492	5717	5405	
		60	5411	5333	5369	5554	5298	
		65	5637	5398	5256	5464	5435	
		70	5622	5320	5465	5587	5493	
		75	5288	5454	5376	5332	5442	
		80	5272	5507	5452	5315	5355	
		85	5560	5308	5402	5404	5326	
		90	5284	5572	5563	5523	5361	
		95	5371	5267	5505	5479	5374	

Type 6 Radar Waveform_27

Download	27	Type 6	1.0	333.3	9	0.3333	300.0000000	17
		Frequency List (MHz)	0	1	2	3	4	
		0	5418	5578	5536	5460	5563	
		5	5461	5342	5463	5705	5423	
		10	5654	5558	5438	5643	5529	
		15	5398	5327	5268	5476	5428	
		20	5371	5393	5309	5703	5597	
		25	5263	5594	5568	5492	5519	
		30	5595	5467	5259	5565	5542	
		35	5642	5457	5305	5414	5434	
		40	5321	5251	5592	5633	5470	
		45	5629	5662	5440	5648	5376	
		50	5420	5481	5686	5528	5275	
		55	5616	5655	5685	5550	5689	
		60	5499	5318	5436	5650	5437	
		65	5549	5598	5351	5612	5288	
		70	5369	5579	5292	5357	5623	
		75	5401	5483	5315	5404	5267	
		80	5366	5446	5364	5603	5456	
		85	5452	5614	5373	5624	5442	
		90	5589	5567	5547	5280	5406	
		95	5330	5380	5314	5339	5286	

Type 6 Radar Waveform_28

☐	Download	28	Type 6	1.0	333.3	9	0.3333	300.0000000	11
			Frequency List (MHz)	0	1	2	3	4	
			0	5673	5342	5472	5621	5308	
			5	5503	5364	5538	5393	5630	
			10	5488	5347	5479	5363	5550	
			15	5389	5454	5371	5521	5620	
			20	5379	5559	5250	5317	5570	
			25	5529	5446	5296	5596	5553	
			30	5637	5356	5691	5305	5316	
			35	5462	5499	5396	5685	5684	
			40	5710	5565	5675	5571	5626	
			45	5494	5420	5256	5434	5473	
			50	5368	5465	5704	5511	5461	
			55	5439	5502	5398	5504	5404	
			60	5318	5667	5340	5382	5381	
			65	5424	5394	5435	5712	5411	
			70	5659	5635	5539	5609	5501	
			75	5332	5291	5276	5387	5509	
			80	5427	5616	5677	5370	5344	
			85	5345	5528	5530	5264	5623	
			90	5360	5481	5578	5495	5320	
			95	5373	5643	5544	5415	5682	

Type 6 Radar Waveform_29

☐	Download	29	Type 6	1.0	333.3	9	0.3333	300.0000000	11
			Frequency List (MHz)	0	1	2	3	4	
			0	5356	5581	5408	5307	5625	
			5	5642	5289	5613	5459	5419	
			10	5611	5520	5558	5571	5477	
			15	5474	5566	5337	5387	5628	
			20	5666	5309	5543	5417	5298	
			25	5499	5700	5587	5679	5342	
			30	5648	5468	5660	5638	5487	
			35	5578	5362	5721	5404	5283	
			40	5509	5475	5623	5423	5400	
			45	5339	5395	5429	5633	5341	
			50	5405	5562	5550	5640	5446	
			55	5586	5458	5594	5612	5694	
			60	5505	5424	5310	5347	5340	
			65	5636	5661	5344	5621	5454	
			70	5438	5708	5595	5504	5656	
			75	5645	5720	5507	5555	5393	
			80	5251	5493	5683	5265	5367	
			85	5539	5723	5370	5590	5359	
			90	5588	5411	5254	5398	5407	
			95	5428	5556	5432	5262	5314	



Test Site	SIP-TR1	Test Engineer	Tom Chen
Test Date	2026-01-08		
Test Item	Radar Statistical Performance Check (802.11be-EHT80 - 5530 MHz)		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5522	1	5510	1	5503	1	5510	1
1	5528	1	5531	1	5525	1	5519	1
2	5527	1	5524	1	5548	0	5530	1
3	5530	1	5493	1	5540	1	5554	1
4	5540	1	5568	0	5544	0	5530	1
5	5492	1	5566	1	5509	1	5541	1
6	5569	1	5530	1	5563	1	5490	0
7	5494	1	5543	1	5530	1	5531	1
8	5569	1	5527	1	5493	1	5507	0
9	5529	1	5535	1	5552	1	5531	1
10	5565	1	5556	1	5547	1	5551	1
11	5546	1	5562	0	5538	1	5570	0
12	5516	1	5544	1	5524	1	5553	1
13	5558	1	5511	1	5511	1	5520	1
14	5490	1	5490	1	5490	0	5490	0
15	5568	1	5559	1	5544	1	5510	1
16	5540	1	5543	1	5508	1	5515	1
17	5568	1	5509	1	5497	1	5524	1
18	5553	1	5550	0	5557	0	5548	1
19	5537	1	5546	1	5533	1	5525	1
20	5544	0	5540	1	5507	1	5545	1
21	5556	1	5554	1	5570	0	5552	1
22	5558	1	5537	1	5527	1	5492	1
23	5562	0	5514	1	5530	1	5532	1
24	5556	1	5497	0	5533	1	5552	1
25	5552	1	5570	0	5528	1	5526	1
26	5566	1	5558	1	5535	1	5538	1
27	5570	1	5510	1	5547	1	5570	0



Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
28	5557	1	5516	1	5509	1	5539	0
29	5537	1	5503	1	5506	1	5515	1
Probability:	93.3%		83.3%		83.3%		80.0%	
Aggregate:	85.0% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	558.0	95	53010.0	Download	0	Type 2	1.4	207.0	23	4761.0
Download	1	Type 1	1.0	758.0	70	53060.0	Download	1	Type 2	1.0	150.0	23	3450.0
Download	2	Type 1	1.0	678.0	78	52884.0	Download	2	Type 2	4.1	208.0	28	5824.0
Download	3	Type 1	1.0	3066.0	18	55188.0	Download	3	Type 2	2.4	178.0	25	4450.0
Download	4	Type 1	1.0	658.0	81	53298.0	Download	4	Type 2	2.5	195.0	25	4875.0
Download	5	Type 1	1.0	578.0	92	53176.0	Download	5	Type 2	3.7	164.0	27	4428.0
Download	6	Type 1	1.0	778.0	68	52904.0	Download	6	Type 2	4.5	189.0	28	5292.0
Download	7	Type 1	1.0	638.0	83	52954.0	Download	7	Type 2	4.1	224.0	28	6272.0
Download	8	Type 1	1.0	918.0	58	53244.0	Download	8	Type 2	1.1	153.0	23	3519.0
Download	9	Type 1	1.0	838.0	63	52794.0	Download	9	Type 2	3.1	228.0	26	5928.0
Download	10	Type 1	1.0	518.0	102	52836.0	Download	10	Type 2	1.2	220.0	23	5060.0
Download	11	Type 1	1.0	738.0	72	53136.0	Download	11	Type 2	2.3	223.0	25	5575.0
Download	12	Type 1	1.0	698.0	76	53048.0	Download	12	Type 2	2.8	159.0	26	4134.0
Download	13	Type 1	1.0	718.0	74	53132.0	Download	13	Type 2	1.7	203.0	24	4872.0
Download	14	Type 1	1.0	818.0	65	53170.0	Download	14	Type 2	4.2	225.0	28	6300.0
Download	15	Type 1	1.0	1932.0	28	54096.0	Download	15	Type 2	3.5	186.0	27	5022.0
Download	16	Type 1	1.0	1452.0	37	53724.0	Download	16	Type 2	2.2	198.0	25	4950.0
Download	17	Type 1	1.0	2383.0	23	54809.0	Download	17	Type 2	2.8	170.0	26	4420.0
Download	18	Type 1	1.0	2388.0	23	54924.0	Download	18	Type 2	4.7	182.0	29	5278.0
Download	19	Type 1	1.0	1815.0	30	54450.0	Download	19	Type 2	4.2	210.0	28	5880.0
Download	20	Type 1	1.0	1431.0	37	52947.0	Download	20	Type 2	2.0	155.0	24	3720.0
Download	21	Type 1	1.0	1864.0	29	54056.0	Download	21	Type 2	1.1	157.0	23	3611.0
Download	22	Type 1	1.0	1016.0	52	52832.0	Download	22	Type 2	1.6	190.0	24	4560.0
Download	23	Type 1	1.0	1591.0	34	54094.0	Download	23	Type 2	3.2	200.0	26	5200.0
Download	24	Type 1	1.0	920.0	58	53360.0	Download	24	Type 2	1.3	172.0	23	3956.0
Download	25	Type 1	1.0	1973.0	27	53271.0	Download	25	Type 2	2.7	192.0	25	4800.0
Download	26	Type 1	1.0	833.0	64	53312.0	Download	26	Type 2	4.9	181.0	29	5249.0
Download	27	Type 1	1.0	1960.0	27	52920.0	Download	27	Type 2	1.9	173.0	24	4152.0
Download	28	Type 1	1.0	2467.0	22	54274.0	Download	28	Type 2	5.0	184.0	29	5336.0
Download	29	Type 1	1.0	2410.0	22	53020.0	Download	29	Type 2	5.0	179.0	29	5191.0



Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	6.4	339.0	16	5424.0	Download	0	Type 4	11.8	339.0	12	4068.0
Download	1	Type 3	6.0	225.0	16	3600.0	Download	1	Type 4	11.1	225.0	12	2700.0
Download	2	Type 3	9.1	451.0	18	8118.0	Download	2	Type 4	17.9	451.0	15	6765.0
Download	3	Type 3	7.4	209.0	17	3553.0	Download	3	Type 4	14.2	209.0	13	2717.0
Download	4	Type 3	7.5	369.0	17	6273.0	Download	4	Type 4	14.5	369.0	13	4797.0
Download	5	Type 3	8.7	312.0	18	5616.0	Download	5	Type 4	17.1	312.0	15	4680.0
Download	6	Type 3	9.5	280.0	18	5040.0	Download	6	Type 4	18.7	280.0	16	4480.0
Download	7	Type 3	9.1	325.0	18	5850.0	Download	7	Type 4	17.8	325.0	15	4875.0
Download	8	Type 3	6.1	418.0	16	6688.0	Download	8	Type 4	11.3	418.0	12	5016.0
Download	9	Type 3	8.1	284.0	17	4828.0	Download	9	Type 4	15.6	284.0	14	3976.0
Download	10	Type 3	6.2	483.0	16	7728.0	Download	10	Type 4	11.6	483.0	12	5796.0
Download	11	Type 3	7.3	289.0	17	4913.0	Download	11	Type 4	14.0	289.0	13	3757.0
Download	12	Type 3	7.8	375.0	17	6375.0	Download	12	Type 4	15.1	375.0	14	5250.0
Download	13	Type 3	6.7	404.0	16	6464.0	Download	13	Type 4	12.6	404.0	12	4848.0
Download	14	Type 3	9.2	328.0	18	5904.0	Download	14	Type 4	18.2	328.0	16	5248.0
Download	15	Type 3	8.5	338.0	17	5746.0	Download	15	Type 4	16.6	338.0	15	5070.0
Download	16	Type 3	7.2	239.0	16	3824.0	Download	16	Type 4	13.7	239.0	13	3107.0
Download	17	Type 3	7.8	290.0	17	4930.0	Download	17	Type 4	15.0	290.0	14	4060.0
Download	18	Type 3	9.7	384.0	18	6912.0	Download	18	Type 4	19.3	384.0	16	6144.0
Download	19	Type 3	9.2	247.0	18	4446.0	Download	19	Type 4	18.1	247.0	15	3705.0
Download	20	Type 3	7.0	470.0	16	7520.0	Download	20	Type 4	13.3	470.0	13	6110.0
Download	21	Type 3	6.1	232.0	16	3712.0	Download	21	Type 4	11.4	232.0	12	2784.0
Download	22	Type 3	6.6	389.0	16	6224.0	Download	22	Type 4	12.5	389.0	12	4668.0
Download	23	Type 3	8.2	258.0	17	4386.0	Download	23	Type 4	16.0	258.0	14	3612.0
Download	24	Type 3	6.3	324.0	16	5184.0	Download	24	Type 4	11.8	324.0	12	3888.0
Download	25	Type 3	7.7	330.0	17	5610.0	Download	25	Type 4	14.8	330.0	14	4620.0
Download	26	Type 3	9.9	393.0	18	7074.0	Download	26	Type 4	19.8	393.0	16	6288.0
Download	27	Type 3	6.9	425.0	16	6800.0	Download	27	Type 4	13.1	425.0	13	5525.0
Download	28	Type 3	10.0	230.0	18	4140.0	Download	28	Type 4	19.9	230.0	16	3680.0
Download	29	Type 3	10.0	215.0	18	3870.0	Download	29	Type 4	19.9	215.0	16	3440.0



Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5530	1	15	5497	1
1	5530	1	16	5495	1
2	5530	1	17	5496	1
3	5530	1	18	5499	1
4	5530	1	19	5498	1
5	5530	1	20	5565	1
6	5530	1	21	5567	0
7	5530	1	22	5566	1
8	5530	0	23	5564	1
9	5530	0	24	5566	1
10	5494	1	25	5564	0
11	5495	1	26	5561	1
12	5496	0	27	5566	1
13	5494	1	28	5561	1
14	5498	1	29	5561	1
Detection Percentage (%)			83.3%		

Type 5 Radar Waveform_0

Download	0	Type 5	9	1.3333333	12.0000000	5.530000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	453860.0	54.9	6	1	1141.0	-	-
		1	776704.0	50.7	6	1	1579.0	-	-
		2	1097627.0	88.3	6	3	1001.0	1277.0	1807.0
		3	90821.0	67.9	6	2	1596.0	1630.0	-
		4	413639.0	69.4	6	2	1461.0	1042.0	-
		5	735168.0	84.1	6	3	1654.0	1445.0	1643.0
		6	1057744.0	92.8	6	3	1153.0	1554.0	1594.0
		7	51044.0	87.9	6	3	1669.0	1578.0	1032.0
		8	374278.0	52.0	6	1	1089.0	-	-

Type 5 Radar Waveform_1

Download	1	Type 5	8	1.5000000	12.0000000	5.530000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	784081.0	75.8	5	2	1144.0	1002.0	-
		1	1148179.0	53.6	5	1	1073.0	-	-
		2	12779.0	67.0	5	2	1022.0	1238.0	-
		3	375927.0	72.8	5	2	1206.0	1457.0	-
		4	739839.0	58.9	5	1	1123.0	-	-
		5	1100437.0	90.1	5	3	1646.0	1719.0	1733.0
		6	1465148.0	81.1	5	2	1752.0	1150.0	-
		7	331431.0	65.3	5	1	1595.0	-	-

Type 5 Radar Waveform_2

Download	2	Type 5	17	0.7058824	12.0000000	5.530000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	326017.0	72.4	17	2	1164.0	1673.0	-
		1	495252.0	96.1	17	3	1504.0	1177.0	1962.0
		2	666024.0	89.1	17	3	1291.0	1340.0	1276.0
		3	134719.0	63.2	17	1	1711.0	-	-
		4	305441.0	52.2	17	1	1854.0	-	-
		5	476697.0	58.4	17	1	1104.0	-	-
		6	645712.0	77.6	17	2	1763.0	1426.0	-
		7	113645.0	54.5	17	1	1941.0	-	-
		8	283606.0	71.1	17	2	1884.0	1956.0	-
		9	453627.0	98.4	17	3	1069.0	1385.0	1767.0
		10	626088.0	61.7	17	1	1650.0	-	-
		11	92229.0	99.1	17	3	1139.0	1759.0	1981.0
		12	262596.0	99.3	17	3	1039.0	1392.0	1507.0
		13	432841.0	84.4	17	3	1068.0	1174.0	1695.0
		14	604967.0	52.1	17	1	1746.0	-	-
		15	71413.0	85.1	17	3	1000.0	1212.0	1430.0
		16	242510.0	63.4	17	1	1371.0	-	-

Type 5 Radar Waveform_3

Download	3	Type 5	12	1.0000000	12.0000000	5.530000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	585294.0	74.6	10	2	1418.0	1072.0	-
		1	826296.0	70.3	10	2	1800.0	1806.0	-
		2	71618.0	72.1	10	2	1617.0	1170.0	-
		3	313055.0	89.2	10	3	1387.0	1698.0	1031.0
		4	554115.0	97.6	10	3	1437.0	1764.0	1765.0
		5	796788.0	66.8	10	2	1664.0	1620.0	-
		6	41819.0	70.7	10	2	1505.0	1456.0	-
		7	284003.0	61.5	10	1	1660.0	-	-
		8	524381.0	93.0	10	3	1694.0	1465.0	1823.0
		9	766258.0	99.5	10	3	1037.0	1525.0	1700.0
		10	12051.0	65.2	10	1	1537.0	-	-
		11	254306.0	61.1	10	1	1159.0	-	-

Type 5 Radar Waveform_4

☐	Download	4	Type 5	13	0.9230769	12.0000000	5.530000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	456735.0	88.4	11	3	1613.0	1214.0	1511.0
			1	679087.0	92.5	11	3	1513.0	1791.0	1670.0
			2	904154.0	71.1	11	2	1313.0	1220.0	-
			3	206451.0	83.4	11	3	1846.0	1413.0	1142.0
			4	430819.0	61.4	11	1	1062.0	-	-
			5	653836.0	53.0	11	1	1907.0	-	-
			6	875408.0	92.0	11	3	1156.0	1361.0	1323.0
			7	179609.0	64.7	11	1	1306.0	-	-
			8	403272.0	54.3	11	1	1066.0	-	-
			9	626586.0	52.6	11	1	1512.0	-	-
			10	847261.0	92.4	11	3	1328.0	1497.0	1758.0
			11	152118.0	60.6	11	1	1023.0	-	-
			12	375375.0	63.4	11	1	1932.0	-	-

Type 5 Radar Waveform_5

☐	Download	5	Type 5	16	0.7500000	12.0000000	5.530000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	484737.0	98.3	15	3	1955.0	1329.0	1014.0
			1	665968.0	85.7	15	3	1534.0	1080.0	1264.0
			2	100826.0	81.1	15	2	1776.0	1937.0	-
			3	281348.0	88.8	15	3	1070.0	1928.0	1976.0
			4	463887.0	52.7	15	1	1996.0	-	-
			5	643126.0	91.4	15	3	1560.0	1661.0	1296.0
			6	78735.0	51.4	15	1	1771.0	-	-
			7	259670.0	82.0	15	2	1885.0	1422.0	-
			8	441856.0	59.4	15	1	1462.0	-	-
			9	620391.0	84.3	15	3	1969.0	1472.0	1634.0
			10	56338.0	69.7	15	2	1278.0	1084.0	-
			11	238017.0	59.0	15	1	1252.0	-	-
			12	418628.0	76.2	15	2	1266.0	1741.0	-
			13	599262.0	74.9	15	2	1836.0	1838.0	-
			14	33978.0	79.3	15	2	1341.0	1565.0	-
			15	215164.0	68.3	15	2	1881.0	1051.0	-

Type 5 Radar Waveform_6

☐	Download	6	Type 5	19	0.6315789	12.0000000	5.530000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	334480.0	51.6	18	1	1131.0	-	-
			1	487314.0	59.2	18	1	1221.0	-	-
			2	9833.0	58.9	18	1	1544.0	-	-
			3	162674.0	62.4	18	1	1397.0	-	-
			4	314377.0	93.4	18	3	1055.0	1092.0	1518.0
			5	467742.0	82.8	18	2	1021.0	1196.0	-
			6	620877.0	55.9	18	1	1715.0	-	-
			7	143286.0	90.6	18	3	1047.0	1648.0	1160.0
			8	296732.0	65.6	18	1	1300.0	-	-
			9	447475.0	87.9	18	3	1315.0	1180.0	1777.0
			10	600726.0	81.4	18	2	1924.0	1187.0	-
			11	125022.0	60.1	18	1	1391.0	-	-
			12	277086.0	70.3	18	2	1655.0	1498.0	-
			13	430732.0	59.0	18	1	1349.0	-	-
			14	581937.0	71.9	18	2	1417.0	1709.0	-
			15	105964.0	78.0	18	2	1085.0	1682.0	-
			16	259114.0	61.4	18	1	1201.0	-	-
			17	410993.0	75.8	18	2	1171.0	1572.0	-
			18	561824.0	99.3	18	3	1542.0	1762.0	1316.0

Type 5 Radar Waveform_7

☐	Download	7	Type 5	17	0.7058824	12.0000000	5.530000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	97405.0	81.1	17	2	1309.0	1998.0	-
			1	267549.0	89.6	17	3	1487.0	1040.0	1443.0
			2	438573.0	72.7	17	2	1434.0	1273.0	-
			3	607664.0	90.2	17	3	1503.0	1007.0	1873.0
			4	76601.0	58.1	17	1	1609.0	-	-
			5	247430.0	63.7	17	1	1552.0	-	-
			6	417602.0	79.2	17	2	1183.0	1463.0	-
			7	587152.0	78.9	17	2	1865.0	1986.0	-
			8	55551.0	58.2	17	1	1742.0	-	-
			9	226470.0	51.4	17	1	1298.0	-	-
			10	396291.0	74.4	17	2	1964.0	1219.0	-
			11	564572.0	85.3	17	3	1961.0	1983.0	1900.0
			12	34470.0	78.2	17	2	1548.0	1117.0	-
			13	205371.0	62.7	17	1	1468.0	-	-
			14	374292.0	96.4	17	3	1747.0	1618.0	1702.0
			15	546735.0	52.7	17	1	1883.0	-	-
			16	13440.0	93.5	17	3	1474.0	1225.0	1099.0

Type 5 Radar Waveform_8

☐	Download	8	Type 5	8	1.5000000	12.0000000	5.530000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	391187.0	83.4	5	3	1691.0	1467.0	1904.0
			1	754605.0	98.2	5	3	1241.0	1109.0	1030.0
			2	1117313.0	70.0	5	2	1841.0	1899.0	-
			3	1482130.0	65.5	5	1	1793.0	-	-
			4	346855.0	79.8	5	2	1690.0	1953.0	-
			5	709364.0	90.6	5	3	1942.0	1078.0	1477.0
			6	1073211.0	73.2	5	2	1728.0	1178.0	-
			7	1437551.0	64.9	5	1	1605.0	-	-

Type 5 Radar Waveform_9

☐	Download	9	Type 5	14	0.8571429	12.0000000	5.530000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	172752.0	60.0	13	1	1621.0	-	-
			1	379065.0	91.3	13	3	1394.0	1058.0	1820.0
			2	587642.0	61.6	13	1	1755.0	-	-
			3	795203.0	50.3	13	1	1644.0	-	-
			4	147205.0	62.3	13	1	1553.0	-	-
			5	353108.0	91.8	13	3	1680.0	1896.0	1847.0
			6	560477.0	97.6	13	3	1750.0	1146.0	1310.0
			7	769439.0	50.3	13	1	1874.0	-	-
			8	121348.0	75.6	13	2	1870.0	1774.0	-
			9	328394.0	98.2	13	3	1326.0	1143.0	1057.0
			10	535953.0	78.8	13	2	1667.0	1013.0	-
			11	742227.0	78.9	13	2	1805.0	1979.0	-
			12	95830.0	69.0	13	2	2000.0	1825.0	-
			13	303743.0	50.8	13	1	1128.0	-	-

Type 5 Radar Waveform_10

☐	Download	10	Type 5	8	1.5000000	12.0000000	5.494000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	893390.0	98.7	6	3	1496.0	1494.0	1460.0
			1	1258221.0	64.1	6	1	1934.0	—	—
			2	123552.0	53.8	6	1	1097.0	—	—
			3	485961.0	97.7	6	3	1676.0	1348.0	1526.0
			4	849061.0	89.2	6	3	1086.0	1255.0	1493.0
			5	1211776.0	91.3	6	3	1344.0	1095.0	1583.0
			6	78761.0	52.5	6	1	1331.0	—	—
			7	442105.0	53.1	6	1	1772.0	—	—

Type 5 Radar Waveform_11

☐	Download	11	Type 5	12	1.0000000	12.0000000	5.495000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	534851.0	97.5	10	3	1559.0	1737.0	1849.0
			1	777224.0	74.0	10	2	1812.0	1936.0	—
			2	22651.0	56.2	10	1	1251.0	—	—
			3	264435.0	78.5	10	2	1029.0	1898.0	—
			4	505372.0	94.7	10	3	1730.0	1400.0	1539.0
			5	749069.0	63.2	10	1	1606.0	—	—
			6	991525.0	55.7	10	1	1290.0	—	—
			7	234176.0	83.8	10	3	1466.0	1779.0	1688.0
			8	477080.0	51.3	10	1	1649.0	—	—
			9	717033.0	99.1	10	3	1835.0	1263.0	1576.0
			10	957831.0	99.6	10	3	1920.0	1475.0	1901.0
			11	204871.0	75.3	10	2	1053.0	1824.0	—

Type 5 Radar Waveform_12

☐	Download	12	Type 5	13	0.9230769	12.0000000	5.496000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	411551.0	98.1	12	3	1012.0	1729.0	1683.0
			1	635600.0	72.4	12	2	1096.0	1523.0	—
			2	858758.0	67.6	12	2	1347.0	1359.0	—
			3	161597.0	78.6	12	2	1016.0	1744.0	—
			4	384132.0	96.0	12	3	1293.0	1866.0	1205.0
			5	608799.0	59.6	12	1	1563.0	—	—
			6	830839.0	76.8	12	2	1782.0	1393.0	—
			7	134006.0	84.9	12	3	1161.0	1163.0	1101.0
			8	357990.0	52.5	12	1	1006.0	—	—
			9	581158.0	64.6	12	1	1740.0	—	—
			10	803891.0	67.5	12	2	1083.0	1481.0	—
			11	106587.0	73.9	12	2	1383.0	1568.0	—
			12	329524.0	74.4	12	2	1930.0	1641.0	—

Type 5 Radar Waveform_13

☐	Download	13	Type 5	10	1.2000000	12.0000000	5.494000000			
			Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
			0	719440.0	82.5	7	2	1063.0	1671.0	—
			1	1008268.0	99.5	7	3	1766.0	1370.0	1432.0
			2	103018.0	55.8	7	1	1631.0	—	—
			3	393735.0	61.7	7	1	1403.0	—	—
			4	683350.0	82.1	7	2	1869.0	1429.0	—
			5	975104.0	51.4	7	1	1435.0	—	—
			6	67174.0	81.9	7	2	1035.0	1378.0	—
			7	357901.0	62.3	7	1	1492.0	—	—
			8	648830.0	56.8	7	1	1025.0	—	—
			9	936319.0	93.9	7	3	1931.0	1358.0	1946.0

Type 5 Radar Waveform_14

Download	14	Type 5	18	0.6666667	12.0000000	5.498000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	17380.0	87.6	17	3	1597.0	1044.0	1088.0
		1	178124.0	94.1	17	3	1367.0	1261.0	1248.0
		2	338139.0	83.8	17	3	1829.0	1877.0	1603.0
		3	498935.0	97.2	17	3	1785.0	1875.0	1124.0
		4	660227.0	84.4	17	3	1061.0	1909.0	1046.0
		5	158223.0	94.6	17	3	1438.0	1020.0	1837.0
		6	318715.0	91.9	17	3	1997.0	1168.0	1451.0
		7	479353.0	96.8	17	3	1499.0	1984.0	1036.0
		8	641203.0	79.8	17	2	1861.0	1356.0	-
		9	138758.0	79.3	17	2	1208.0	1543.0	-
		10	299389.0	93.8	17	3	1152.0	1325.0	1136.0
		11	461591.0	52.7	17	1	1610.0	-	-
		12	621205.0	76.3	17	2	1551.0	1856.0	-
		13	118460.0	96.6	17	3	1905.0	1681.0	1753.0
		14	279452.0	75.3	17	2	1947.0	1973.0	-
		15	442078.0	51.7	17	1	1076.0	-	-
		16	601005.0	79.5	17	2	1882.0	1950.0	-
		17	99302.0	64.5	17	1	1334.0	-	-

Type 5 Radar Waveform_15

Download	15	Type 5	16	0.7500000	12.0000000	5.497000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	292787.0	67.7	14	2	1629.0	1049.0	-
		1	474579.0	50.6	14	1	1822.0	-	-
		2	655284.0	82.8	14	2	1540.0	1140.0	-
		3	89345.0	56.4	14	1	1570.0	-	-
		4	270278.0	82.4	14	2	1247.0	1939.0	-
		5	452254.0	54.1	14	1	1780.0	-	-
		6	634286.0	62.1	14	1	1112.0	-	-
		7	66964.0	63.7	14	1	1813.0	-	-
		8	247505.0	100.0	14	3	1628.0	1619.0	1332.0
		9	429016.0	72.1	14	2	1357.0	1963.0	-
		10	609979.0	69.2	14	2	1490.0	1990.0	-
		11	44466.0	97.6	14	3	1259.0	1305.0	1704.0
		12	225749.0	67.7	14	2	1778.0	1102.0	-
		13	407445.0	62.9	14	1	1971.0	-	-
		14	587304.0	91.3	14	3	1598.0	1158.0	1198.0
		15	22217.0	78.6	14	2	1335.0	1970.0	-

Type 5 Radar Waveform_16

Download	16	Type 5	11	1.0909091	12.0000000	5.495000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	296228.0	80.1	9	2	1292.0	1684.0	-
		1	559403.0	84.5	9	3	1008.0	1322.0	1972.0
		2	824897.0	62.1	9	1	1718.0	-	-
		3	1089627.0	62.5	9	1	1151.0	-	-
		4	263216.0	92.4	9	3	1770.0	1626.0	1685.0
		5	526970.0	90.3	9	3	1652.0	1582.0	1010.0
		6	792290.0	60.6	9	1	1811.0	-	-
		7	1054768.0	67.8	9	2	1769.0	1756.0	-
		8	230776.0	87.8	9	3	1723.0	1421.0	1944.0
		9	493855.0	94.7	9	3	1999.0	1925.0	1751.0
		10	758418.0	80.7	9	2	1809.0	1918.0	-

Type 5 Radar Waveform_17

Download	17	Type 5	13	0.9230769	12.0000000	5.496000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	864645.0	79.8	12	2	1384.0	1985.0	-
		1	168103.0	73.2	12	2	1736.0	1045.0	-
		2	392005.0	59.3	12	1	1132.0	-	-
		3	613799.0	86.4	12	3	1071.0	1081.0	1686.0
		4	837766.0	80.4	12	2	1268.0	1446.0	-
		5	140621.0	72.0	12	2	1535.0	1173.0	-
		6	363567.0	67.3	12	2	1402.0	1995.0	-
		7	586087.0	94.7	12	3	1254.0	1374.0	1601.0
		8	811296.0	56.2	12	1	1549.0	-	-
		9	113308.0	61.0	12	1	1226.0	-	-
		10	336129.0	81.1	12	2	1795.0	1501.0	-
		11	560227.0	61.7	12	1	1615.0	-	-
		12	781865.0	79.7	12	2	1859.0	1926.0	-

Type 5 Radar Waveform_18

Download	18	Type 5	19	0.6315789	12.0000000	5.499000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	58295.0	85.0	19	3	1958.0	1126.0	1929.0
		1	211026.0	70.6	19	2	1244.0	1479.0	-
		2	362569.0	94.7	19	3	1033.0	1407.0	1968.0
		3	515921.0	69.8	19	2	1637.0	1256.0	-
		4	39676.0	77.5	19	2	1745.0	1705.0	-
		5	192128.0	82.2	19	2	1245.0	1842.0	-
		6	345582.0	61.6	19	1	1217.0	-	-
		7	496476.0	80.8	19	2	1910.0	1821.0	-
		8	20982.0	61.5	19	1	1304.0	-	-
		9	172847.0	97.7	19	3	1115.0	1851.0	1952.0
		10	326680.0	66.5	19	1	1353.0	-	-
		11	476585.0	90.8	19	3	1923.0	1799.0	1500.0
		12	2140.0	89.6	19	3	1423.0	1853.0	1892.0
		13	154595.0	66.9	19	2	1192.0	1818.0	-
		14	306969.0	72.1	19	2	1933.0	1227.0	-
		15	459788.0	77.4	19	2	1458.0	1145.0	-
		16	611182.0	90.0	19	3	1246.0	1121.0	1420.0
		17	136163.0	64.9	19	1	1410.0	-	-
		18	288546.0	68.7	19	2	1043.0	1354.0	-

Type 5 Radar Waveform_19

Download	19	Type 5	18	0.6666667	12.0000000	5.498000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	464186.0	87.8	17	3	1506.0	1433.0	1679.0
		1	625703.0	73.4	17	2	1710.0	1902.0	-
		2	123548.0	82.4	17	2	1249.0	1890.0	-
		3	283957.0	90.5	17	3	1529.0	1622.0	1194.0
		4	444447.0	90.7	17	3	1439.0	1712.0	1409.0
		5	605797.0	85.7	17	3	1107.0	1233.0	1379.0
		6	103597.0	88.9	17	3	1398.0	1342.0	1223.0
		7	264796.0	75.6	17	2	1260.0	1519.0	-
		8	426592.0	50.3	17	1	1558.0	-	-
		9	587335.0	68.3	17	2	1125.0	1075.0	-
		10	83694.0	85.1	17	3	1611.0	1338.0	1843.0
		11	244736.0	67.5	17	2	1399.0	1993.0	-
		12	404657.0	99.0	17	3	1754.0	1897.0	1286.0
		13	566193.0	72.8	17	2	1721.0	1991.0	-
		14	64082.0	82.5	17	2	1852.0	1279.0	-
		15	224955.0	77.6	17	2	1974.0	1318.0	-
		16	386011.0	71.8	17	2	1419.0	1587.0	-
		17	545559.0	95.7	17	3	1330.0	1787.0	1600.0

Type 5 Radar Waveform_20

Download	20	Type 5	11	1.0909091	12.0000000	5.565000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	72502.0	90.8	9	3	1232.0	1288.0	1416.0
		1	335812.0	90.4	9	3	1826.0	1406.0	1724.0
		2	601021.0	55.5	9	1	1639.0	-	-
		3	864319.0	83.1	9	2	1224.0	1528.0	-
		4	40018.0	99.9	9	3	1110.0	1351.0	1810.0
		5	304122.0	68.3	9	2	1111.0	1155.0	-
		6	567762.0	75.6	9	2	1362.0	1651.0	-
		7	830063.0	92.8	9	3	1903.0	1761.0	1375.0
		8	7556.0	95.7	9	3	1082.0	1444.0	1653.0
		9	270967.0	90.9	9	3	1726.0	1127.0	1948.0
		10	535919.0	55.0	9	1	1677.0	-	-

Type 5 Radar Waveform_21

Download	21	Type 5	8	1.5000000	12.0000000	5.567000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	1098664.0	95.3	5	3	1831.0	1284.0	1181.0
		1	1462815.0	67.2	5	2	1585.0	1283.0	-
		2	329007.0	66.2	5	1	1855.0	-	-
		3	691560.0	96.1	5	3	1130.0	1428.0	1015.0
		4	1055632.0	62.4	5	1	1954.0	-	-
		5	1417161.0	74.0	5	2	1927.0	1922.0	-
		6	284321.0	56.2	5	1	1484.0	-	-
		7	647651.0	52.6	5	1	1732.0	-	-

Type 5 Radar Waveform_22

Download	22	Type 5	10	1.2000000	12.0000000	5.566000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	807542.0	80.1	7	2	1796.0	1488.0	-
		1	1099857.0	54.0	7	1	1024.0	-	-
		2	191180.0	84.2	7	3	1624.0	1210.0	1250.0
		3	481210.0	88.7	7	3	1828.0	1297.0	1003.0
		4	772997.0	56.6	7	1	1414.0	-	-
		5	1063285.0	61.2	7	1	1872.0	-	-
		6	155750.0	62.4	7	1	1802.0	-	-
		7	445940.0	76.4	7	2	1781.0	1122.0	-
		8	736166.0	80.2	7	2	1508.0	1571.0	-
		9	1026565.0	67.5	7	2	1567.0	1386.0	-

Type 5 Radar Waveform_23

Download	23	Type 5	15	0.8000000	12.0000000	5.563000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	79851.0	68.0	13	2	1312.0	1077.0	-
		1	273606.0	57.1	13	1	1486.0	-	-
		2	464995.0	89.4	13	3	1716.0	1659.0	2000.0
		3	661145.0	50.3	13	1	1234.0	-	-
		4	56026.0	81.8	13	2	1004.0	1337.0	-
		5	248767.0	99.2	13	3	1320.0	1346.0	1967.0
		6	442451.0	74.6	13	2	1678.0	1546.0	-
		7	637157.0	63.1	13	1	1390.0	-	-
		8	32232.0	54.7	13	1	1473.0	-	-
		9	225638.0	73.6	13	2	1118.0	1282.0	-
		10	419753.0	64.1	13	1	1120.0	-	-
		11	613165.0	64.9	13	1	1566.0	-	-
		12	8344.0	97.9	13	3	1590.0	1734.0	1172.0
		13	201424.0	90.0	13	3	1382.0	1176.0	1365.0
		14	394289.0	98.0	13	3	1311.0	1992.0	1041.0

Type 5 Radar Waveform_24

Download	24	Type 5	9	1.3333333	12.0000000	5.566000000			
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
0	982003.0	70.5	6	2	1442.0	1415.0	-		
1	1305813.0	55.1	6	1	1707.0	-	-		
2	297263.0	51.1	6	1	1189.0	-	-		
3	619584.0	68.8	6	2	1561.0	1274.0	-		
4	942649.0	71.4	6	2	1275.0	1027.0	-		
5	1262986.0	86.6	6	3	1401.0	1599.0	1911.0		
6	256758.0	98.8	6	3	1632.0	1699.0	1521.0		
7	580055.0	76.2	6	2	1203.0	1129.0	-		
8	902203.0	74.9	6	2	1935.0	1373.0	-		

Type 5 Radar Waveform_25

Download	25	Type 5	13	0.9230769	12.0000000	5.564000000			
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
0	845902.0	91.7	11	3	1186.0	1989.0	1308.0		
1	150257.0	91.6	11	3	1079.0	1087.0	1336.0		
2	373906.0	56.6	11	1	1966.0	-	-		
3	597468.0	51.6	11	1	1714.0	-	-		
4	819111.0	99.0	11	3	1360.0	1280.0	1113.0		
5	122885.0	71.8	11	2	1464.0	1287.0	-		
6	345413.0	87.4	11	3	1236.0	1689.0	1635.0		
7	568225.0	91.9	11	3	1106.0	1471.0	1914.0		
8	791511.0	95.5	11	3	1175.0	1569.0	1166.0		
9	95366.0	75.3	11	2	1789.0	1200.0	-		
10	318573.0	77.7	11	2	1555.0	1270.0	-		
11	540933.0	83.8	11	3	1301.0	1696.0	1239.0		
12	766439.0	65.7	11	1	1038.0	-	-		

Type 5 Radar Waveform_26

Download	26	Type 5	20	0.6000000	12.0000000	5.561000000			
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
0	43894.0	94.9	20	3	1672.0	1817.0	1536.0		
1	188541.0	85.5	20	3	1191.0	1720.0	1019.0		
2	333467.0	67.1	20	2	1564.0	1722.0	-		
3	478191.0	71.5	20	2	1608.0	1675.0	-		
4	26128.0	99.3	20	3	1345.0	1975.0	1531.0		
5	171077.0	69.3	20	2	1065.0	1666.0	-		
6	315626.0	82.7	20	2	1364.0	1949.0	-		
7	459106.0	88.6	20	3	1483.0	1616.0	1815.0		
8	8392.0	65.2	20	1	1735.0	-	-		
9	153544.0	56.2	20	1	1524.0	-	-		
10	297360.0	94.3	20	3	1253.0	1094.0	1848.0		
11	441506.0	90.7	20	3	1830.0	1527.0	1317.0		
12	586061.0	86.1	20	3	1450.0	1640.0	1412.0		
13	135760.0	56.1	20	1	1103.0	-	-		
14	280976.0	61.3	20	1	1179.0	-	-		
15	426048.0	57.6	20	1	1405.0	-	-		
16	570696.0	58.7	20	1	1960.0	-	-		
17	117532.0	81.0	20	2	1788.0	1026.0	-		
18	262344.0	69.2	20	2	1541.0	1327.0	-		
19	407194.0	80.9	20	2	1449.0	1381.0	-		

Type 5 Radar Waveform_27

Download	27	Type 5	11	1.0909091	12.0000000	5.565000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	1006899.0	64.4	8	1	1668.0	--	--
		1	181872.0	58.6	8	1	1431.0	--	--
		2	444891.0	90.2	8	3	1452.0	1489.0	1454.0
		3	708169.0	92.6	8	3	1602.0	1562.0	1593.0
		4	972852.0	73.0	8	2	1916.0	1436.0	--
		5	149305.0	64.1	8	1	1574.0	--	--
		6	412994.0	82.9	8	2	1028.0	1886.0	--
		7	675611.0	86.2	8	3	1840.0	1857.0	1237.0
		8	940897.0	72.2	8	2	1557.0	1408.0	--
		9	116677.0	69.5	8	2	1093.0	1272.0	--
		10	380621.0	72.6	8	2	1005.0	1538.0	--

Type 5 Radar Waveform_28

Download	28	Type 5	20	0.6000000	12.0000000	5.561000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	354198.0	62.2	20	1	1945.0	--	--
		1	499367.0	64.2	20	1	1798.0	--	--
		2	46247.0	54.8	20	1	1808.0	--	--
		3	191282.0	60.2	20	1	1961.0	--	--
		4	336363.0	65.6	20	1	1888.0	--	--
		5	481953.0	51.6	20	1	1231.0	--	--
		6	28225.0	100.0	20	3	1803.0	1350.0	1860.0
		7	172728.0	87.3	20	3	1522.0	1743.0	1059.0
		8	318170.0	79.5	20	2	1199.0	1299.0	--
		9	460741.0	93.6	20	3	1919.0	1994.0	1607.0
		10	10452.0	86.4	20	3	1731.0	1591.0	1581.0
		11	155208.0	76.5	20	2	1959.0	1303.0	--
		12	299297.0	85.4	20	3	1844.0	1575.0	1114.0
		13	445995.0	62.3	20	1	1476.0	--	--
		14	591617.0	60.9	20	1	1009.0	--	--
		15	137871.0	62.9	20	1	1133.0	--	--
		16	283076.0	65.7	20	1	1216.0	--	--
		17	427149.0	76.0	20	2	1184.0	1642.0	--
		18	571132.0	84.2	20	3	1533.0	1091.0	1090.0
		19	119124.0	86.8	20	3	1889.0	1876.0	1645.0

Type 5 Radar Waveform_29

Download	29	Type 5	20	0.6000000	12.0000000	5.561000000			
		Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
		0	264053.0	94.3	20	3	1258.0	1453.0	1067.0
		1	410302.0	58.5	20	1	1376.0	—	—
		2	555190.0	52.8	20	1	1697.0	—	—
		3	102074.0	51.2	20	1	1228.0	—	—
		4	246110.0	86.3	20	3	1218.0	1242.0	1636.0
		5	390811.0	95.3	20	3	1530.0	1064.0	1235.0
		6	536090.0	74.6	20	2	1074.0	1988.0	—
		7	83838.0	98.5	20	3	1448.0	1197.0	1056.0
		8	228110.0	85.2	20	3	1657.0	1801.0	1154.0
		9	372406.0	86.4	20	3	1485.0	1509.0	1786.0
		10	516460.0	96.5	20	3	1887.0	1586.0	1658.0
		11	66276.0	66.3	20	1	1427.0	—	—
		12	210304.0	95.8	20	3	1827.0	1556.0	1285.0
		13	354458.0	83.6	20	3	1938.0	1913.0	1207.0
		14	500687.0	82.0	20	2	1368.0	1380.0	—
		15	48245.0	76.5	20	2	1794.0	1480.0	—
		16	192839.0	81.3	20	2	1832.0	1845.0	—
		17	336750.0	95.9	20	3	1366.0	1665.0	1912.0
		18	481400.0	95.8	20	3	1491.0	1701.0	1343.0
		19	30514.0	55.9	20	1	1389.0	—	—



Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	1	16	1
2	1	17	1
3	1	18	1
4	1	19	1
5	1	20	1
6	1	21	1
7	1	22	1
8	1	23	1
9	1	24	1
10	1	25	1
11	1	26	1
12	1	27	1
13	1	28	1
14	1	29	1
Detection Percentage (%)		100.0%	

Type 6 Radar Waveform_0

Download	0	Type 6	1.0	333.3	9	0.3333	300.0000000	17
		Frequency List (MHz)	0	1	2	3	4	
		0	5596	5623	5257	5598	5369	
		5	5696	5400	5284	5470	5506	
		10	5576	5441	5583	5452	5274	
		15	5439	5326	5328	5650	5500	
		20	5495	5554	5683	5570	5462	
		25	5604	5270	5483	5435	5666	
		30	5447	5675	5310	5443	5509	
		35	5518	5494	5251	5278	5393	
		40	5693	5613	5394	5612	5667	
		45	5312	5635	5527	5586	5531	
		50	5292	5287	5412	5386	5587	
		55	5298	5642	5671	5626	5406	
		60	5250	5588	5523	5356	5490	
		65	5498	5630	5656	5649	5472	
		70	5352	5476	5569	5557	5383	
		75	5638	5590	5537	5396	5339	
		80	5504	5401	5382	5254	5300	
		85	5458	5544	5317	5398	5372	
		90	5427	5322	5603	5461	5429	
		95	5431	5536	5665	5280	5640	

Type 6 Radar Waveform_1

Download	1	Type 6	1.0	333.3	9	0.3333	300.0000000	22
		Frequency List (MHz)	0	1	2	3	4	
		0	5376	5484	5668	5284	5686	
		5	5263	5325	5359	5633	5713	
		10	5507	5705	5624	5647	5295	
		15	5527	5453	5431	5598	5692	
		20	5503	5720	5721	5562	5435	
		25	5492	5597	5539	5603	5489	
		30	5632	5525	5329	5330	5609	
		35	5290	5404	5667	5707	5301	
		40	5395	5491	5610	5701	5495	
		45	5275	5628	5365	5522	5306	
		50	5287	5582	5478	5488	5356	
		55	5574	5444	5461	5545	5280	
		60	5571	5292	5420	5446	5302	
		65	5313	5447	5666	5521	5291	
		70	5576	5418	5550	5516	5352	
		75	5661	5258	5585	5314	5506	
		80	5595	5464	5566	5699	5285	
		85	5553	5509	5271	5646	5546	
		90	5537	5602	5540	5309	5381	
		95	5684	5408	5534	5259	5663	

Type 6 Radar Waveform_2

Download	2	Type 6	1.0	333.3	9	0.3333	300.0000000	15
		Frequency List (MHz)	0	1	2	3	4	
		0	5631	5723	5604	5445	5431	
		5	5305	5347	5434	5321	5542	
		10	5438	5591	5665	5367	5316	
		15	5518	5580	5534	5643	5409	
		20	5511	5411	5662	5651	5408	
		25	5283	5449	5414	5637	5531	
		30	5451	5589	5265	5369	5527	
		35	5372	5700	5561	5654	5678	
		40	5384	5333	5256	5704	5630	
		45	5475	5358	5418	5312	5657	
		50	5463	5633	5567	5311	5287	
		55	5398	5658	5516	5261	5712	
		60	5252	5272	5514	5396	5605	
		65	5698	5336	5553	5593	5277	
		70	5579	5267	5526	5306	5304	
		75	5566	5616	5376	5357	5624	
		80	5563	5285	5413	5323	5270	
		85	5377	5322	5419	5269	5702	
		90	5608	5477	5666	5443	5538	
		95	5436	5668	5257	5387	5457	

Type 6 Radar Waveform_3

Download	3	Type 6	1.0	333.3	9	0.3333	300.0000000	16
		Frequency List (MHz)	0	1	2	3	4	
		0	5411	5487	5540	5606	5273	
		5	5444	5272	5509	5484	5274	
		10	5380	5706	5562	5337	5707	
		15	5688	5601	5422	5480	5603	
		20	5643	5381	5646	5398	5617	
		25	5671	5670	5437	5546	5383	
		30	5618	5347	5511	5316	5357	
		35	5332	5592	5482	5467	5271	
		40	5399	5701	5559	5455	5441	
		45	5647	5471	5674	5533	5639	
		50	5684	5656	5609	5622	5475	
		55	5352	5296	5477	5538	5426	
		60	5657	5573	5291	5715	5345	
		65	5641	5530	5356	5287	5263	
		70	5679	5591	5502	5434	5668	
		75	5447	5547	5721	5629	5632	
		80	5521	5687	5463	5711	5663	
		85	5286	5462	5720	5276	5667	
		90	5564	5392	5451	5552	5555	
		95	5491	5652	5630	5269	5265	

Type 6 Radar Waveform_4

☐	Download	4	Type 6	1.0	333.3	9	0.3333	300.0000000	13
			Frequency List (MHz)	0	1	2	3	4	
			0	5666	5251	5476	5292	5493	
			5	5486	5294	5584	5647	5481	
			10	5678	5644	5369	5282	5358	
			15	5694	5262	5643	5636	5318	
			20	5430	5646	5641	5257	5354	
			25	5437	5250	5723	5376	5705	
			30	5712	5326	5503	5598	5295	
			35	5545	5650	5407	5485	5506	
			40	5321	5684	5639	5698	5391	
			45	5435	5524	5464	5409	5340	
			50	5260	5270	5432	5469	5663	
			55	5306	5296	5458	5667	5591	
			60	5699	5488	5496	5538	5580	
			65	5265	5498	5537	5359	5724	
			70	5682	5343	5478	5393	5637	
			75	5546	5528	5264	5413	5588	
			80	5275	5460	5431	5566	5669	
			85	5346	5557	5685	5327	5440	
			90	5287	5717	5333	5661	5258	
			95	5271	5475	5671	5690	5389	

Type 6 Radar Waveform_5

☐	Download	5	Type 6	1.0	333.3	9	0.3333	300.0000000	11
			Frequency List (MHz)	0	1	2	3	4	
			0	5349	5490	5412	5356	5335	
			5	5528	5694	5659	5713	5310	
			10	5609	5433	5410	5380	5379	
			15	5307	5389	5271	5681	5510	
			20	5438	5715	5582	5724	5424	
			25	5325	5674	5451	5577	5264	
			30	5279	5690	5460	5338	5544	
			35	5365	5314	5595	5521	5260	
			40	5517	5635	5255	5622	5404	
			45	5695	5320	5415	5607	5666	
			50	5480	5351	5663	5516	5311	
			55	5456	5633	5413	5676	5493	
			60	5332	5321	5281	5644	5322	
			65	5658	5340	5616	5572	5293	
			70	5667	5454	5352	5509	5636	
			75	5275	5277	5669	5457	5626	
			80	5566	5511	5309	5274	5553	
			85	5688	5722	5723	5482	5593	
			90	5673	5686	5601	5717	5426	
			95	5605	5374	5471	5647	5417	

Type 6 Radar Waveform_6

Download	6	Type 6	1.0	333.3	9	0.3333	300.0000000	17
		Frequency List (MHz)	0	1	2	3	4	
		0	5604	5254	5348	5517	5555	
		5	5570	5716	5259	5401	5443	
		10	5697	5451	5575	5400	5298	
		15	5516	5374	5251	5702	5349	
		20	5406	5523	5338	5397	5591	
		25	5526	5654	5681	5418	5676	
		30	5417	5553	5696	5563	5356	
		35	5686	5317	5413	5431	5571	
		40	5560	5644	5692	5627	5395	
		45	5690	5724	5533	5616	5539	
		50	5362	5545	5456	5260	5467	
		55	5689	5391	5312	5303	5353	
		60	5446	5589	5720	5701	5562	
		65	5289	5652	5307	5618	5600	
		70	5318	5310	5430	5311	5478	
		75	5304	5490	5527	5387	5450	
		80	5441	5498	5454	5469	5369	
		85	5518	5710	5461	5305	5412	
		90	5475	5703	5656	5421	5584	
		95	5477	5493	5566	5384	5250	

Type 6 Radar Waveform_7

Download	7	Type 6	1.0	333.3	9	0.3333	300.0000000	16
		Frequency List (MHz)	0	1	2	3	4	
		0	5384	5493	5284	5678	5397	
		5	5709	5641	5334	5564	5724	
		10	5374	5583	5492	5295	5421	
		15	5386	5643	5477	5296	5516	
		20	5357	5475	5561	5330	5370	
		25	5479	5378	5382	5310	5332	
		30	5460	5565	5671	5470	5383	
		35	5495	5302	5685	5566	5345	
		40	5410	5518	5498	5312	5311	
		45	5556	5375	5298	5307	5586	
		50	5503	5415	5393	5413	5634	
		55	5279	5679	5655	5581	5606	
		60	5274	5482	5611	5534	5459	
		65	5546	5647	5288	5713	5591	
		70	5614	5455	5294	5304	5313	
		75	5365	5309	5270	5350	5568	
		80	5497	5706	5605	5451	5638	
		85	5372	5292	5286	5612	5577	
		90	5260	5453	5319	5720	5711	
		95	5466	5580	5691	5661	5596	

Type 6 Radar Waveform_8

☐	Download	8	Type 6	1.0	333.3	9	0.3333	300.0000000	8
			Frequency List (MHz)	0	1	2	3	4	
			0	5639	5257	5695	5364	5617	
			5	5276	5663	5409	5252	5456	
			10	5683	5372	5533	5490	5442	
			15	5474	5295	5483	5719	5708	
			20	5365	5641	5502	5419	5343	
			25	5367	5327	5585	5414	5366	
			30	5454	5331	5411	5622	5678	
			35	5634	5393	5481	5341	5356	
			40	5724	5601	5339	5552	5308	
			45	5485	5258	5381	5268	5293	
			50	5291	5569	5464	5723	5577	
			55	5526	5368	5597	5296	5425	
			60	5720	5611	5301	5576	5388	
			65	5593	5586	5662	5627	5349	
			70	5250	5699	5290	5413	5592	
			75	5285	5704	5319	5493	5549	
			80	5459	5510	5487	5672	5624	
			85	5351	5358	5609	5392	5278	
			90	5715	5385	5323	5267	5363	
			95	5428	5359	5692	5445	5659	

Type 6 Radar Waveform_9

☐	Download	9	Type 6	1.0	333.3	9	0.3333	300.0000000	19
			Frequency List (MHz)	0	1	2	3	4	
			0	5322	5496	5631	5525	5362	
			5	5318	5588	5484	5285	5614	
			10	5636	5574	5463	5562	5325	
			15	5586	5289	5425	5276	5710	
			20	5443	5508	5316	5633	5654	
			25	5313	5615	5400	5641	5440	
			30	5288	5626	5396	5401	5298	
			35	5277	5494	5270	5563	5684	
			40	5317	5305	5713	5464	5326	
			45	5692	5655	5545	5515	5434	
			50	5303	5470	5556	5551	5486	
			55	5622	5594	5265	5466	5521	
			60	5695	5295	5539	5312	5611	
			65	5566	5656	5617	5405	5535	
			70	5373	5416	5441	5261	5663	
			75	5666	5530	5711	5620	5268	
			80	5361	5309	5348	5553	5275	
			85	5548	5355	5694	5291	5432	
			90	5369	5424	5499	5537	5376	
			95	5346	5590	5327	5311	5709	

Type 6 Radar Waveform_10

Download	10	Type 6	1.0	333.3	9	0.3333	300.0000000	21
		Frequency List (MHz)	0	1	2	3	4	
		0	5577	5260	5567	5686	5679	
		5	5360	5610	5559	5481	5492	
		10	5545	5425	5615	5308	5484	
		15	5553	5452	5689	5334	5617	
		20	5284	5401	5384	5500	5289	
		25	5521	5603	5419	5719	5434	
		30	5683	5329	5720	5366	5548	
		35	5696	5340	5672	5647	5659	
		40	5402	5292	5690	5460	5302	
		45	5721	5693	5547	5270	5445	
		50	5421	5446	5566	5523	5601	
		55	5317	5269	5505	5579	5441	
		60	5565	5394	5631	5466	5527	
		65	5596	5582	5513	5560	5602	
		70	5391	5412	5607	5359	5516	
		75	5290	5712	5622	5635	5597	
		80	5682	5511	5488	5255	5524	
		85	5525	5372	5345	5273	5653	
		90	5390	5415	5406	5341	5375	
		95	5458	5549	5393	5259	5306	

Type 6 Radar Waveform_11

Download	11	Type 6	1.0	333.3	9	0.3333	300.0000000	13
		Frequency List (MHz)	0	1	2	3	4	
		0	5357	5499	5503	5372	5424	
		5	5535	5634	5644	5699	5379	
		10	5689	5656	5505	5641	5579	
		15	5317	5334	5292	5470	5422	
		20	5589	5262	5312	5455	5622	
		25	5348	5468	5250	5693	5677	
		30	5484	5322	5419	5479	5288	
		35	5441	5670	5338	5472	5628	
		40	5700	5299	5553	5673	5630	
		45	5345	5701	5332	5297	5617	
		50	5612	5261	5457	5459	5294	
		55	5260	5536	5426	5321	5411	
		60	5359	5528	5336	5509	5638	
		65	5698	5682	5486	5679	5519	
		70	5614	5688	5581	5604	5717	
		75	5253	5492	5265	5268	5305	
		80	5435	5342	5565	5653	5329	
		85	5378	5660	5527	5296	5654	
		90	5539	5287	5381	5395	5658	
		95	5410	5456	5340	5386	5663	

Type 6 Radar Waveform_12

Download	12	Type 6	1.0	333.3	9	0.3333	300.0000000	18
		Frequency List (MHz)	0	1	2	3	4	
		0	5612	5263	5439	5533	5266	
		5	5541	5557	5709	5332	5528	
		10	5310	5478	5319	5698	5526	
		15	5254	5706	5420	5327	5678	
		20	5636	5363	5581	5710	5675	
		25	5307	5350	5452	5502	5389	
		30	5679	5634	5699	5474	5714	
		35	5618	5379	5712	5575	5584	
		40	5652	5555	5566	5465	5393	
		45	5482	5653	5713	5403	5279	
		50	5597	5551	5323	5668	5701	
		55	5722	5583	5548	5413	5484	
		60	5457	5507	5486	5453	5666	
		65	5345	5537	5458	5577	5433	
		70	5574	5289	5373	5428	5619	
		75	5463	5664	5443	5476	5362	
		80	5396	5473	5517	5378	5561	
		85	5281	5498	5339	5285	5556	
		90	5646	5341	5377	5492	5250	
		95	5427	5359	5429	5523	5292	

Type 6 Radar Waveform_13

Download	13	Type 6	1.0	333.3	9	0.3333	300.0000000	18
		Frequency List (MHz)	0	1	2	3	4	
		0	5295	5502	5375	5597	5486	
		5	5583	5482	5309	5398	5260	
		10	5716	5364	5360	5418	5547	
		15	5342	5358	5426	5372	5718	
		20	5686	5327	5304	5670	5683	
		25	5466	5256	5553	5653	5536	
		30	5431	5568	5591	5439	5723	
		35	5437	5660	5470	5508	5253	
		40	5498	5491	5638	5504	5705	
		45	5390	5411	5633	5321	5461	
		50	5332	5484	5427	5499	5719	
		55	5315	5448	5527	5261	5270	
		60	5674	5276	5381	5684	5651	
		65	5595	5646	5517	5407	5613	
		70	5265	5369	5567	5445	5414	
		75	5622	5690	5543	5402	5442	
		80	5454	5672	5488	5658	5714	
		85	5480	5459	5401	5569	5301	
		90	5675	5557	5617	5490	5463	
		95	5308	5541	5566	5279	5621	

Type 6 Radar Waveform_14

☐	Download	14	Type 6	1.0	333.3	9	0.3333	300.0000000	17
			Frequency List (MHz)	0	1	2	3	4	
			0	5550	5266	5311	5283	5328	
			5	5625	5504	5384	5561	5467	
			10	5628	5401	5516	5568	5333	
			15	5388	5529	5417	5532	5694	
			20	5396	5342	5662	5656	5354	
			25	5583	5281	5282	5570	5473	
			30	5554	5548	5654	5400	5257	
			35	5324	5503	5509	5330	5343	
			40	5442	5373	5387	5718	5404	
			45	5422	5385	5274	5303	5675	
			50	5295	5501	5271	5374	5449	
			55	5699	5389	5352	5338	5341	
			60	5427	5569	5463	5356	5649	
			65	5475	5261	5273	5614	5722	
			70	5539	5519	5361	5317	5602	
			75	5585	5435	5598	5609	5721	
			80	5711	5459	5364	5664	5325	
			85	5255	5351	5377	5307	5496	
			90	5665	5413	5558	5621	5652	
			95	5371	5657	5655	5588	5322	

Type 6 Radar Waveform_15

☐	Download	15	Type 6	1.0	333.3	9	0.3333	300.0000000	14
			Frequency List (MHz)	0	1	2	3	4	
			0	5330	5505	5722	5444	5548	
			5	5289	5429	5362	5724	5296	
			10	5481	5417	5442	5711	5589	
			15	5421	5515	5632	5462	5605	
			20	5562	5283	5276	5629	5717	
			25	5532	5387	5386	5604	5443	
			30	5408	5297	5649	5552	5463	
			35	5652	5672	5656	5423	5266	
			40	5426	5380	5613	5384	5647	
			45	5496	5487	5480	5438	5636	
			50	5654	5376	5346	5590	5569	
			55	5318	5637	5653	5579	5389	
			60	5323	5467	5506	5288	5259	
			65	5395	5409	5305	5588	5307	
			70	5531	5551	5686	5250	5388	
			75	5495	5320	5286	5625	5253	
			80	5416	5701	5611	5379	5298	
			85	5309	5708	5269	5424	5381	
			90	5668	5306	5599	5575	5472	
			95	5502	5434	5450	5522	5676	

Type 6 Radar Waveform_16

☐ Download	16	Type 6	1.0	333.3	9	0.3333	300.0000000	11
		Frequency List (MHz)	0	1	2	3	4	
		0	5585	5366	5658	5605	5390	
		5	5331	5451	5437	5412	5503	
		10	5681	5483	5431	5610	5509	
		15	5642	5260	5410	5441	5613	
		20	5631	5699	5268	5602	5508	
		25	5384	5590	5490	5638	5654	
		30	5332	5365	5512	5326	5275	
		35	5468	5334	5337	5580	5696	
		40	5378	5381	5479	5476	5570	
		45	5538	5491	5426	5433	5552	
		50	5397	5679	5392	5640	5350	
		55	5607	5294	5586	5596	5671	
		60	5330	5566	5355	5254	5624	
		65	5517	5354	5380	5469	5253	
		70	5712	5471	5279	5633	5270	
		75	5299	5478	5635	5705	5687	
		80	5265	5387	5372	5395	5637	
		85	5371	5534	5592	5256	5357	
		90	5448	5364	5557	5389	5604	
		95	5578	5386	5663	5720	5449	

Type 6 Radar Waveform_17

☐ Download	17	Type 6	1.0	333.3	9	0.3333	300.0000000	12
		Frequency List (MHz)	0	1	2	3	4	
		0	5365	5605	5594	5291	5610	
		5	5373	5376	5512	5478	5710	
		10	5721	5470	5524	5626	5631	
		15	5597	5294	5363	5455	5633	
		20	5621	5322	5262	5357	5575	
		25	5396	5711	5318	5691	5672	
		30	5696	5252	5570	5644	5456	
		35	5264	5584	5348	5419	5592	
		40	5634	5618	5475	5408	5653	
		45	5499	5544	5313	5309	5253	
		50	5448	5293	5690	5538	5561	
		55	5387	5405	5643	5628	5361	
		60	5275	5495	5619	5398	5311	
		65	5678	5563	5349	5693	5632	
		70	5452	5353	5464	5447	5713	
		75	5602	5390	5442	5255	5259	
		80	5416	5529	5532	5702	5407	
		85	5265	5525	5668	5501	5620	
		90	5593	5327	5611	5706	5438	
		95	5346	5343	5660	5587	5370	

Type 6 Radar Waveform_18

☐	Download	18	Type 6	1.0	333.3	9	0.3333	300.0000000	18
			Frequency List (MHz)	0	1	2	3	4	
			0	5523	5369	5530	5452	5512	
			5	5398	5587	5641	5539	5652	
			10	5356	5565	5346	5588	5421	
			15	5500	5350	5532	5391	5678	
			20	5349	5548	5662	5660	5521	
			25	5320	5706	5263	5682	5279	
			30	5467	5252	5293	5308	5547	
			35	5632	5262	5258	5297	5572	
			40	5286	5472	5715	5436	5261	
			45	5557	5578	5429	5499	5479	
			50	5416	5431	5629	5515	5577	
			55	5699	5614	5282	5526	5695	
			60	5327	5445	5344	5609	5627	
			65	5599	5559	5488	5435	5621	
			70	5441	5313	5423	5672	5474	
			75	5510	5456	5507	5693	5595	
			80	5602	5643	5367	5410	5385	
			85	5466	5265	5393	5413	5492	
			90	5617	5342	5277	5723	5366	
			95	5422	5719	5700	5288	5310	

Type 6 Radar Waveform_19

☐	Download	19	Type 6	1.0	333.3	9	0.3333	300.0000000	15
			Frequency List (MHz)	0	1	2	3	4	
			0	5303	5608	5466	5613	5672	
			5	5554	5420	5662	5329	5271	
			10	5486	5620	5606	5444	5673	
			15	5676	5451	5472	5448	5542	
			20	5540	5557	5619	5438	5521	
			25	5550	5512	5724	5424	5643	
			30	5402	5571	5711	5585	5501	
			35	5588	5447	5638	5428	5415	
			40	5651	5572	5380	5510	5526	
			45	5469	5644	5416	5441	5615	
			50	5553	5465	5536	5508	5568	
			55	5714	5375	5342	5292	5421	
			60	5411	5691	5262	5634	5290	
			65	5335	5576	5635	5391	5616	
			70	5693	5427	5456	5637	5302	
			75	5631	5443	5630	5437	5382	
			80	5453	5658	5599	5322	5546	
			85	5306	5470	5480	5334	5694	
			90	5641	5611	5657	5623	5376	
			95	5356	5289	5265	5406	5679	

Type 6 Radar Waveform_20

Download	20	Type 6	1.0	333.3	9	0.3333	300.0000000	17
		Frequency List (MHz)	0	1	2	3	4	
		0	5558	5372	5402	5677	5514	
		5	5596	5345	5262	5492	5478	
		10	5417	5409	5269	5639	5694	
		15	5289	5578	5575	5493	5259	
		20	5548	5626	5657	5430	5494	
		25	5341	5461	5355	5528	5444	
		30	5557	5668	5325	5653	5311	
		35	5489	5254	5699	5665	5662	
		40	5508	5463	5448	5291	5466	
		45	5573	5396	5524	5576	5606	
		50	5255	5315	5684	5601	5537	
		55	5697	5530	5423	5482	5715	
		60	5556	5540	5381	5682	5669	
		65	5333	5633	5525	5574	5650	
		70	5419	5290	5510	5459	5486	
		75	5278	5590	5412	5418	5439	
		80	5709	5449	5343	5614	5546	
		85	5623	5433	5672	5299	5270	
		90	5414	5334	5347	5629	5313	
		95	5616	5398	5282	5476	5487	

Type 6 Radar Waveform_21

Download	21	Type 6	1.0	333.3	9	0.3333	300.0000000	15
		Frequency List (MHz)	0	1	2	3	4	
		0	5338	5611	5363	5259	5638	
		5	5367	5337	5558	5307	5348	
		10	5673	5310	5359	5715	5377	
		15	5705	5678	5538	5451	5459	
		20	5317	5598	5519	5467	5704	
		25	5313	5254	5711	5486	5446	
		30	5625	5540	5427	5606	5628	
		35	5442	5592	5343	5576	5347	
		40	5546	5386	5434	5463	5405	
		45	5279	5607	5634	5659	5617	
		50	5666	5385	5652	5271	5360	
		55	5641	5718	5672	5534	5430	
		60	5669	5627	5298	5495	5474	
		65	5610	5433	5445	5697	5496	
		70	5559	5335	5549	5284	5345	
		75	5399	5691	5602	5490	5613	
		80	5406	5593	5334	5449	5465	
		85	5493	5292	5642	5699	5565	
		90	5629	5415	5257	5498	5410	
		95	5396	5531	5471	5510	5597	

Type 6 Radar Waveform_22

Download	22	Type 6	1.0	333.3	9	0.3333	300.0000000	17
		Frequency List (MHz)	0	1	2	3	4	
		0	5496	5375	5274	5524	5576	
		5	5302	5292	5412	5721	5514	
		10	5657	5462	5351	5554	5261	
		15	5368	5357	5306	5583	5265	
		20	5467	5386	5539	5511	5440	
		25	5592	5640	5286	5358	5270	
		30	5625	5432	5582	5280	5579	
		35	5426	5533	5388	5490	5661	
		40	5251	5324	5674	5557	5334	
		45	5259	5690	5692	5712	5407	
		50	5542	5561	5703	5360	5488	
		55	5431	5331	5387	5353	5401	
		60	5701	5711	5572	5702	5418	
		65	5700	5423	5549	5643	5337	
		70	5500	5531	5482	5562	5705	
		75	5508	5253	5391	5380	5468	
		80	5615	5271	5469	5590	5529	
		85	5352	5404	5456	5484	5607	
		90	5275	5338	5580	5263	5381	
		95	5283	5519	5413	5586	5455	

Type 6 Radar Waveform_23

Download	23	Type 6	1.0	333.3	9	0.3333	300.0000000	17
		Frequency List (MHz)	0	1	2	3	4	
		0	5276	5614	5685	5321	5344	
		5	5314	5487	5409	5721	5588	
		10	5348	5392	5274	5282	5456	
		15	5484	5312	5531	5457	5475	
		20	5552	5480	5600	5413	5383	
		25	5589	5489	5462	5304	5667	
		30	5539	5398	5353	5624	5431	
		35	5659	5271	5501	5500	5334	
		40	5640	5439	5554	5641	5714	
		45	5298	5653	5290	5294	5418	
		50	5262	5279	5546	5384	5432	
		55	5619	5285	5577	5550	5372	
		60	5355	5401	5534	5719	5646	
		65	5585	5607	5303	5700	5468	
		70	5565	5411	5681	5467	5538	
		75	5361	5720	5250	5527	5466	
		80	5532	5587	5724	5352	5516	
		85	5676	5704	5586	5647	5270	
		90	5269	5318	5628	5430	5544	
		95	5536	5306	5328	5543	5702	

Type 6 Radar Waveform_24

Download	24	Type 6	1.0	333.3	9	0.3333	300.0000000	22
		Frequency List (MHz)	0	1	2	3	4	
		0	5531	5378	5621	5371	5638	
		5	5386	5714	5562	5572	5453	
		10	5519	5612	5433	5372	5303	
		15	5544	5514	5415	5576	5649	
		20	5718	5518	5592	5271	5441	
		25	5692	5566	5338	5709	5685	
		30	5496	5613	5505	5444	5473	
		35	5715	5455	5424	5436	5417	
		40	5578	5679	5551	5570	5694	
		45	5381	5711	5721	5559	5672	
		50	5438	5330	5635	5682	5279	
		55	5332	5670	5369	5343	5484	
		60	5366	5545	5689	5681	5321	
		65	5499	5297	5665	5260	5560	
		70	5426	5569	5561	5677	5342	
		75	5400	5360	5308	5533	5487	
		80	5255	5563	5479	5296	5280	
		85	5359	5370	5435	5275	5352	
		90	5522	5640	5447	5599	5520	
		95	5380	5431	5267	5497	5538	

Type 6 Radar Waveform_25

Download	25	Type 6	1.0	333.3	9	0.3333	300.0000000	17
		Frequency List (MHz)	0	1	2	3	4	
		0	5311	5617	5557	5532	5383	
		5	5428	5261	5637	5260	5282	
		10	5353	5401	5474	5567	5324	
		15	5632	5641	5518	5621	5366	
		20	5394	5312	5459	5681	5359	
		25	5537	5390	5323	5670	5372	
		30	5373	5671	5453	5279	5642	
		35	5612	5331	5348	5577	5329	
		40	5275	5597	5516	5347	5548	
		45	5499	5674	5464	5294	5299	
		50	5446	5614	5381	5724	5505	
		55	5698	5423	5571	5385	5663	
		60	5692	5613	5256	5504	5673	
		65	5468	5635	5407	5270	5560	
		70	5517	5287	5466	5668	5584	
		75	5536	5441	5723	5652	5564	
		80	5697	5280	5484	5633	5502	
		85	5442	5488	5308	5709	5607	
		90	5665	5600	5281	5289	5307	
		95	5274	5654	5262	5534	5562	

Type 6 Radar Waveform_26

Download	26	Type 6	1.0	333.3	9	0.3333	300.0000000	18
		Frequency List (MHz)	0	1	2	3	4	
		0	5566	5381	5493	5693	5700	
		5	5567	5661	5712	5326	5489	
		10	5284	5665	5515	5287	5345	
		15	5720	5293	5621	5666	5558	
		20	5402	5478	5400	5673	5332	
		25	5425	5717	5526	5396	5406	
		30	5415	5560	5410	5568	5431	
		35	5462	5276	5519	5619	5352	
		40	5718	5589	5680	5454	5587	
		45	5545	5331	5654	5547	5255	
		50	5711	5424	5315	5432	5338	
		55	5706	5611	5525	5575	5385	
		60	5663	5267	5421	5449	5505	
		65	5294	5581	5608	5694	5596	
		70	5252	5565	5538	5523	5433	
		75	5512	5344	5391	5401	5429	
		80	5483	5442	5386	5343	5481	
		85	5456	5633	5502	5651	5285	
		90	5380	5388	5290	5384	5323	
		95	5664	5383	5578	5709	5585	

Type 6 Radar Waveform_27

Download	27	Type 6	1.0	333.3	9	0.3333	300.0000000	16
		Frequency List (MHz)	0	1	2	3	4	
		0	5724	5620	5429	5379	5445	
		5	5609	5683	5312	5489	5696	
		10	5690	5454	5556	5482	5366	
		15	5711	5420	5614	5275	5313	
		20	5547	5438	5287	5305	5691	
		25	5569	5254	5500	5440	5457	
		30	5449	5367	5686	5680	5660	
		35	5318	5610	5415	5505	5428	
		40	5288	5392	5352	5639	5260	
		45	5537	5630	5405	5598	5678	
		50	5491	5483	5524	5529	5324	
		55	5479	5290	5679	5634	5299	
		60	5586	5434	5595	5624	5431	
		65	5643	5535	5559	5456	5368	
		70	5707	5606	5296	5488	5303	
		75	5282	5446	5437	5382	5681	
		80	5496	5698	5550	5503	5478	
		85	5651	5536	5283	5465	5300	
		90	5616	5714	5628	5455	5390	
		95	5395	5289	5470	5265	5554	

Type 6 Radar Waveform_28

Download	28	Type 6	1.0	333.3	9	0.3333	300.0000000	16
		Frequency List (MHz)	0	1	2	3	4	
		0	5504	5384	5365	5443	5287	
		5	5651	5608	5387	5652	5525	
		10	5524	5340	5694	5677	5324	
		15	5450	5255	5659	5467	5321	
		20	5713	5379	5279	5278	5579	
		25	5518	5457	5604	5474	5499	
		30	5435	5426	5357	5480	5701	
		35	5308	5658	5643	5267	5371	
		40	5330	5592	5636	5567	5517	
		45	5458	5388	5554	5667	5534	
		50	5613	5352	5336	5512	5433	
		55	5498	5605	5428	5276	5436	
		60	5266	5570	5632	5571	5294	
		65	5251	5646	5304	5396	5509	
		70	5464	5262	5566	5580	5363	
		75	5606	5479	5617	5475	5439	
		80	5600	5492	5484	5290	5401	
		85	5406	5620	5331	5612	5344	
		90	5553	5368	5577	5303	5649	
		95	5395	5275	5412	5640	5555	

Type 6 Radar Waveform_29

Download	29	Type 6	1.0	333.3	9	0.3333	300.0000000	12
		Frequency List (MHz)	0	1	2	3	4	
		0	5284	5623	5301	5604	5507	
		5	5693	5630	5462	5340	5257	
		10	5455	5260	5300	5408	5412	
		15	5577	5358	5704	5659	5329	
		20	5307	5320	5368	5251	5467	
		25	5370	5660	5708	5508	5638	
		30	5324	5281	5641	5606	5596	
		35	5317	5579	5433	5557	5678	
		40	5551	5268	5633	5496	5497	
		45	5321	5429	5511	5275	5430	
		50	5585	5702	5650	5280	5700	
		55	5387	5670	5479	5441	5381	
		60	5573	5344	5516	5541	5607	
		65	5601	5618	5352	5473	5578	
		70	5399	5440	5696	5695	5589	
		75	5626	5710	5716	5306	5629	
		80	5375	5566	5439	5442	5488	
		85	5587	5449	5719	5552	5701	
		90	5310	5402	5706	5688	5613	
		95	5634	5266	5459	5471	5501	

Appendix B - Test Setup Photograph

Refer to "R25S1025043-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1025043-UE" file.

_____ The End _____