

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7647.0	32.9	11.4	44.3	74.0	-29.7	Peak	Horizontal
*	9933.5	33.2	13.8	47.0	68.2	-21.2	Peak	Horizontal
	11480.5	31.6	17.6	49.2	74.0	-24.8	Peak	Horizontal
*	13784.0	31.5	19.0	50.5	68.2	-17.7	Peak	Horizontal
	7451.5	31.4	12.2	43.6	74.0	-30.4	Peak	Vertical
*	10290.5	32.4	14.8	47.2	68.2	-21.0	Peak	Vertical
	11472.0	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical
*	14115.5	31.6	19.9	51.5	68.2	-16.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7494.0	31.6	12.0	43.6	74.0	-30.4	Peak	Horizontal
*	10010.0	32.6	13.8	46.4	68.2	-21.8	Peak	Horizontal
	11540.0	31.5	17.6	49.1	74.0	-24.9	Peak	Horizontal
*	17014.0	33.6	21.6	55.2	68.2	-13.0	Peak	Horizontal
	7460.0	31.3	12.2	43.5	74.0	-30.5	Peak	Vertical
*	10188.5	32.3	14.3	46.6	68.2	-21.6	Peak	Vertical
	12228.5	30.8	17.5	48.3	74.0	-25.7	Peak	Vertical
*	14370.5	31.0	20.2	51.2	68.2	-17.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7638.5	32.1	11.5	43.6	74.0	-30.4	Peak	Horizontal
*	9976.0	33.1	13.8	46.9	68.2	-21.3	Peak	Horizontal
	11472.0	32.1	17.5	49.6	74.0	-24.4	Peak	Horizontal
*	14328.0	31.2	20.2	51.4	68.2	-16.8	Peak	Horizontal
	8488.5	32.5	11.7	44.2	74.0	-29.8	Peak	Vertical
*	10010.0	32.4	13.8	46.2	68.2	-22.0	Peak	Vertical
	11548.5	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical
*	14158.0	32.7	19.7	52.4	68.2	-15.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7570.5	31.9	11.7	43.6	74.0	-30.4	Peak	Horizontal
*	9916.5	33.2	13.7	46.9	68.2	-21.3	Peak	Horizontal
	11089.5	31.9	16.8	48.7	74.0	-25.3	Peak	Horizontal
*	14940.0	32.6	19.8	52.4	68.2	-15.8	Peak	Horizontal
	7366.5	31.2	11.5	42.7	74.0	-31.3	Peak	Vertical
*	7953.0	36.0	11.8	47.8	68.2	-20.4	Peak	Vertical
*	10511.5	32.5	15.4	47.9	68.2	-20.3	Peak	Vertical
	11514.5	32.1	17.3	49.4	74.0	-24.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7519.5	32.2	11.8	44.0	74.0	-30.0	Peak	Horizontal
*	9942.0	32.6	13.8	46.4	68.2	-21.8	Peak	Horizontal
	11540.0	31.9	17.6	49.5	74.0	-24.5	Peak	Horizontal
*	14311.0	31.4	19.9	51.3	68.2	-16.9	Peak	Horizontal
	7570.5	31.9	11.7	43.6	74.0	-30.4	Peak	Vertical
*	9729.5	34.0	13.5	47.5	68.2	-20.7	Peak	Vertical
	11633.5	31.0	17.7	48.7	74.0	-25.3	Peak	Vertical
*	14115.5	31.5	19.9	51.4	68.2	-16.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8123.0	32.4	12.0	44.4	74.0	-29.6	Peak	Horizontal
*	9661.5	33.4	13.5	46.9	68.2	-21.3	Peak	Horizontal
	11531.5	31.9	17.3	49.2	74.0	-24.8	Peak	Horizontal
*	14413.0	31.4	19.7	51.1	68.2	-17.1	Peak	Horizontal
	8437.5	31.7	11.6	43.3	74.0	-30.7	Peak	Vertical
*	9729.5	33.0	13.5	46.5	68.2	-21.7	Peak	Vertical
	11149.0	32.2	16.6	48.8	74.0	-25.2	Peak	Vertical
*	13469.5	31.5	19.3	50.8	68.2	-17.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7528.0	34.0	11.8	45.8	74.0	-28.2	Peak	Horizontal
*	9772.0	32.4	13.5	45.9	68.2	-22.3	Peak	Horizontal
	11514.5	32.3	17.3	49.6	74.0	-24.4	Peak	Horizontal
*	14464.0	32.6	20.2	52.8	68.2	-15.4	Peak	Horizontal
	7434.5	30.8	11.9	42.7	74.0	-31.3	Peak	Vertical
*	9678.5	31.4	13.5	44.9	68.2	-23.3	Peak	Vertical
	11557.0	31.8	17.9	49.7	74.0	-24.3	Peak	Vertical
*	14226.0	31.4	20.0	51.4	68.2	-16.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7451.5	31.4	12.2	43.6	74.0	-30.4	Peak	Horizontal
*	10384.0	32.8	15.1	47.9	68.2	-20.3	Peak	Horizontal
	11642.0	31.8	17.9	49.7	74.0	-24.3	Peak	Horizontal
*	14591.5	32.2	19.5	51.7	68.2	-16.5	Peak	Horizontal
	7528.0	32.6	11.8	44.4	74.0	-29.6	Peak	Vertical
*	9984.5	33.1	13.8	46.9	68.2	-21.3	Peak	Vertical
	11506.0	32.5	17.4	49.9	74.0	-24.1	Peak	Vertical
*	14149.5	31.8	19.9	51.7	68.2	-16.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7460.0	32.0	12.2	44.2	74.0	-29.8	Peak	Horizontal
*	9959.0	34.2	13.9	48.1	68.2	-20.1	Peak	Horizontal
	11472.0	32.1	17.5	49.6	74.0	-24.4	Peak	Horizontal
*	16997.0	33.2	21.9	55.1	68.2	-13.1	Peak	Horizontal
	7443.0	31.5	12.1	43.6	74.0	-30.4	Peak	Vertical
*	10095.0	33.1	13.8	46.9	68.2	-21.3	Peak	Vertical
	11455.0	31.8	17.4	49.2	74.0	-24.8	Peak	Vertical
*	14455.5	31.7	20.3	52.0	68.2	-16.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7375.0	32.0	11.6	43.6	74.0	-30.4	Peak	Horizontal
*	9993.0	32.9	13.7	46.6	68.2	-21.6	Peak	Horizontal
	11557.0	31.3	17.9	49.2	74.0	-24.8	Peak	Horizontal
*	14447.0	31.6	20.4	52.0	68.2	-16.2	Peak	Horizontal
	7341.0	31.7	11.3	43.0	74.0	-31.0	Peak	Vertical
*	10120.5	31.1	14.1	45.2	68.2	-23.0	Peak	Vertical
	11480.5	32.1	17.6	49.7	74.0	-24.3	Peak	Vertical
*	14464.0	31.4	20.2	51.6	68.2	-16.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7468.5	31.2	12.1	43.3	74.0	-30.7	Peak	Horizontal
*	10163.0	33.6	14.0	47.6	68.2	-20.6	Peak	Horizontal
	11489.0	30.9	17.7	48.6	74.0	-25.4	Peak	Horizontal
*	14430.0	31.3	20.1	51.4	68.2	-16.8	Peak	Horizontal
	8208.0	32.0	11.3	43.3	74.0	-30.7	Peak	Vertical
*	10316.0	33.0	14.9	47.9	68.2	-20.3	Peak	Vertical
	11072.5	32.0	16.5	48.5	74.0	-25.5	Peak	Vertical
*	14591.5	33.0	19.5	52.5	68.2	-15.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11ax-HE160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7451.5	31.4	12.2	43.6	74.0	-30.4	Peak	Horizontal
*	10426.5	32.1	15.4	47.5	68.2	-20.7	Peak	Horizontal
	11557.0	31.3	17.9	49.2	74.0	-24.8	Peak	Horizontal
*	14838.0	32.7	19.8	52.5	68.2	-15.7	Peak	Horizontal
	7545.0	32.1	12.0	44.1	74.0	-29.9	Peak	Vertical
*	10341.5	31.9	15.1	47.0	68.2	-21.2	Peak	Vertical
	11540.0	31.2	17.6	48.8	74.0	-25.2	Peak	Vertical
*	15008.0	33.2	19.4	52.6	68.2	-15.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8140.0	32.4	11.7	44.1	74.0	-29.9	Peak	Horizontal
*	10333.0	31.6	15.1	46.7	68.2	-21.5	Peak	Horizontal
	11633.5	31.8	17.7	49.5	74.0	-24.5	Peak	Horizontal
*	14107.0	31.2	19.9	51.1	68.2	-17.1	Peak	Horizontal
	7400.5	31.2	11.8	43.0	74.0	-31.0	Peak	Vertical
*	9925.0	32.5	13.7	46.2	68.2	-22.0	Peak	Vertical
	11599.5	31.9	17.2	49.1	74.0	-24.9	Peak	Vertical
*	14115.5	31.4	19.9	51.3	68.2	-16.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7443.0	31.3	12.1	43.4	74.0	-30.6	Peak	Horizontal
*	9814.5	30.9	13.7	44.6	68.2	-23.6	Peak	Horizontal
	11251.0	31.3	17.2	48.5	74.0	-25.5	Peak	Horizontal
*	14447.0	30.9	20.4	51.3	68.2	-16.9	Peak	Horizontal
	8106.0	31.5	12.1	43.6	74.0	-30.4	Peak	Vertical
*	9738.0	33.5	13.5	47.0	68.2	-21.2	Peak	Vertical
	10928.0	31.6	16.7	48.3	74.0	-25.7	Peak	Vertical
*	14064.5	31.2	19.8	51.0	68.2	-17.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8471.5	32.0	11.7	43.7	74.0	-30.3	Peak	Horizontal
*	10324.5	31.7	15.1	46.8	68.2	-21.4	Peak	Horizontal
	11574.0	31.2	17.7	48.9	74.0	-25.1	Peak	Horizontal
*	14226.0	31.2	20.0	51.2	68.2	-17.0	Peak	Horizontal
	7545.0	31.9	12.0	43.9	74.0	-30.1	Peak	Vertical
*	7961.5	33.6	11.7	45.3	68.2	-22.9	Peak	Vertical
*	10044.0	33.3	13.9	47.2	68.2	-21.0	Peak	Vertical
	11166.0	31.6	17.0	48.6	74.0	-25.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7468.5	31.1	12.1	43.2	74.0	-30.8	Peak	Horizontal
*	9908.0	32.5	13.6	46.1	68.2	-22.1	Peak	Horizontal
	10843.0	31.6	16.5	48.1	74.0	-25.9	Peak	Horizontal
*	14948.5	32.5	19.4	51.9	68.2	-16.3	Peak	Horizontal
	7502.5	31.6	12.0	43.6	74.0	-30.4	Peak	Vertical
*	7953.0	32.6	11.8	44.4	68.2	-23.8	Peak	Vertical
*	9687.0	33.6	13.5	47.1	68.2	-21.1	Peak	Vertical
	11744.0	31.0	17.6	48.6	74.0	-25.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7366.5	32.1	11.5	43.6	74.0	-30.4	Peak	Horizontal
*	10001.5	32.7	13.8	46.5	68.2	-21.7	Peak	Horizontal
	11251.0	31.3	17.2	48.5	74.0	-25.5	Peak	Horizontal
*	14013.5	31.8	19.3	51.1	68.2	-17.1	Peak	Horizontal
	7621.5	32.2	11.7	43.9	74.0	-30.1	Peak	Vertical
*	9721.0	33.3	13.5	46.8	68.2	-21.4	Peak	Vertical
	11489.0	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical
*	14277.0	31.8	19.8	51.6	68.2	-16.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7443.0	31.8	12.1	43.9	74.0	-30.1	Peak	Horizontal
*	10341.5	32.5	15.1	47.6	68.2	-20.6	Peak	Horizontal
	11633.5	31.6	17.7	49.3	74.0	-24.7	Peak	Horizontal
*	13945.5	31.4	19.6	51.0	68.2	-17.2	Peak	Horizontal
	8123.0	31.3	12.0	43.3	74.0	-30.7	Peak	Vertical
*	10256.5	32.3	14.5	46.8	68.2	-21.4	Peak	Vertical
	11506.0	31.1	17.4	48.5	74.0	-25.5	Peak	Vertical
*	14370.5	30.9	20.2	51.1	68.2	-17.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7511.0	31.5	11.9	43.4	74.0	-30.6	Peak	Horizontal
*	10579.5	32.5	15.4	47.9	68.2	-20.3	Peak	Horizontal
	11497.5	30.6	17.6	48.2	74.0	-25.8	Peak	Horizontal
*	14353.5	31.1	20.3	51.4	68.2	-16.8	Peak	Horizontal
	7494.0	31.5	12.0	43.5	74.0	-30.5	Peak	Vertical
*	9721.0	32.5	13.5	46.0	68.2	-22.2	Peak	Vertical
	11616.5	31.0	17.4	48.4	74.0	-25.6	Peak	Vertical
*	13690.5	31.8	18.6	50.4	68.2	-17.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7409.0	31.3	11.7	43.0	74.0	-31.0	Peak	Horizontal
*	9925.0	32.9	13.7	46.6	68.2	-21.6	Peak	Horizontal
	11608.0	32.0	17.2	49.2	74.0	-24.8	Peak	Horizontal
*	14132.5	31.2	20.0	51.2	68.2	-17.0	Peak	Horizontal
	8157.0	33.7	11.5	45.2	74.0	-28.8	Peak	Vertical
*	10256.5	32.9	14.5	47.4	68.2	-20.8	Peak	Vertical
	11642.0	31.1	17.9	49.0	74.0	-25.0	Peak	Vertical
*	14353.5	30.9	20.3	51.2	68.2	-17.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7485.5	31.6	12.0	43.6	74.0	-30.4	Peak	Horizontal
*	10069.5	33.0	13.7	46.7	68.2	-21.5	Peak	Horizontal
	11472.0	31.4	17.5	48.9	74.0	-25.1	Peak	Horizontal
*	14243.0	31.8	20.0	51.8	68.2	-16.4	Peak	Horizontal
	7451.5	32.2	12.2	44.4	74.0	-29.6	Peak	Vertical
*	7953.0	32.7	11.8	44.5	68.2	-23.7	Peak	Vertical
*	10375.5	32.4	15.1	47.5	68.2	-20.7	Peak	Vertical
	11650.5	30.9	17.8	48.7	74.0	-25.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7689.5	32.7	11.2	43.9	74.0	-30.1	Peak	Horizontal
*	10324.5	32.2	15.1	47.3	68.2	-20.9	Peak	Horizontal
	11659.0	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
*	14124.0	30.9	19.9	50.8	68.2	-17.4	Peak	Horizontal
	7400.5	32.1	11.8	43.9	74.0	-30.1	Peak	Vertical
*	7953.0	32.9	11.8	44.7	68.2	-23.5	Peak	Vertical
*	9984.5	33.9	13.8	47.7	68.2	-20.5	Peak	Vertical
	11625.0	31.1	17.6	48.7	74.0	-25.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7485.5	31.9	12.0	43.9	74.0	-30.1	Peak	Horizontal
*	10010.0	32.4	13.8	46.2	68.2	-22.0	Peak	Horizontal
	11081.0	32.2	16.7	48.9	74.0	-25.1	Peak	Horizontal
*	14447.0	31.3	20.4	51.7	68.2	-16.5	Peak	Horizontal
	7553.5	32.5	12.0	44.5	74.0	-29.5	Peak	Vertical
*	9704.0	33.5	13.5	47.0	68.2	-21.2	Peak	Vertical
	11973.5	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical
*	14183.5	31.6	19.9	51.5	68.2	-16.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7324.0	31.8	11.5	43.3	74.0	-30.7	Peak	Horizontal
*	8667.0	33.0	12.5	45.5	68.2	-22.7	Peak	Horizontal
	11166.0	31.3	17.0	48.3	74.0	-25.7	Peak	Horizontal
*	14311.0	31.9	19.9	51.8	68.2	-16.4	Peak	Horizontal
	7570.5	32.5	11.7	44.2	74.0	-29.8	Peak	Vertical
*	9721.0	32.4	13.5	45.9	68.2	-22.3	Peak	Vertical
	11727.0	31.0	17.9	48.9	74.0	-25.1	Peak	Vertical
*	13979.5	30.0	19.1	49.1	68.2	-19.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-11-18	Test Mode	802.11be-EHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7460.0	31.0	12.2	43.2	74.0	-30.8	Peak	Horizontal
*	10018.5	32.2	13.8	46.0	68.2	-22.2	Peak	Horizontal
	11514.5	31.3	17.3	48.6	74.0	-25.4	Peak	Horizontal
*	14812.5	32.2	19.4	51.6	68.2	-16.6	Peak	Horizontal
	7485.5	31.3	12.0	43.3	74.0	-30.7	Peak	Vertical
*	9967.5	32.3	13.9	46.2	68.2	-22.0	Peak	Vertical
	11548.5	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical
*	14277.0	31.6	19.8	51.4	68.2	-16.8	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission for 9 kHz ~ 30 MHz:

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Karl Gao
Probe: FMZB1519_0.009-30 MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

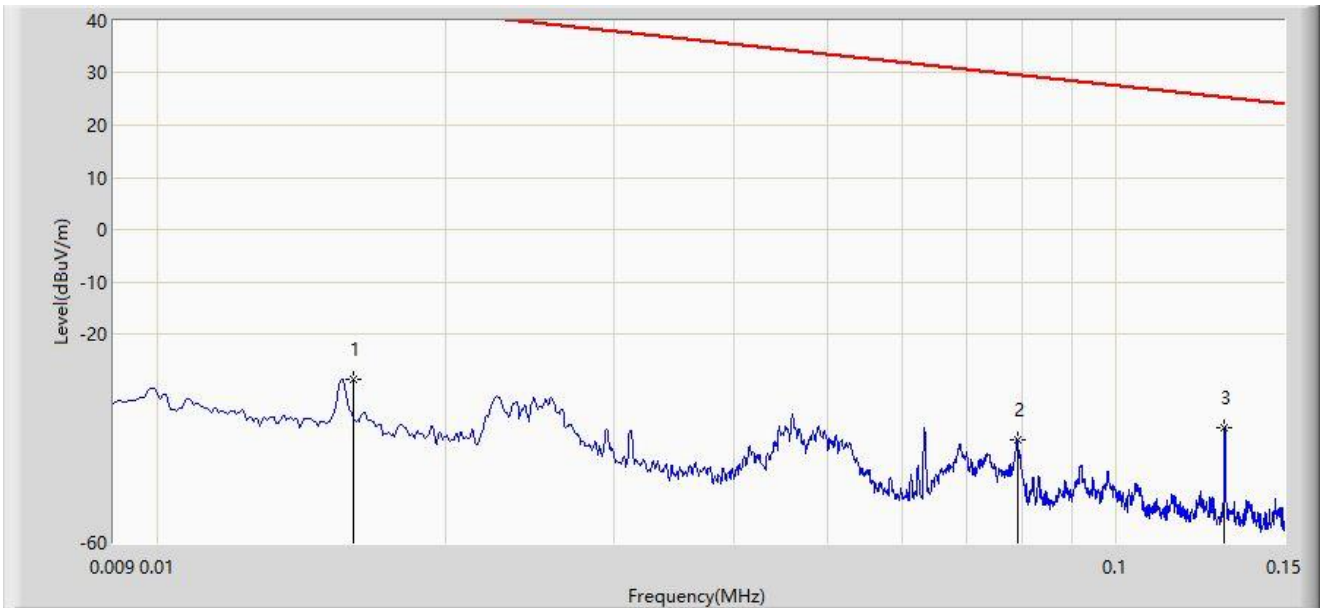

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.016	-28.665	31.149	-72.170	43.505	-59.813	PK
2		0.079	-40.260	21.815	-69.903	29.643	-62.076	PK
3	*	0.130	-38.104	24.043	-63.422	25.319	-62.147	PK


Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Karl Gao
Probe: FMZB1519_0.009-30 MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

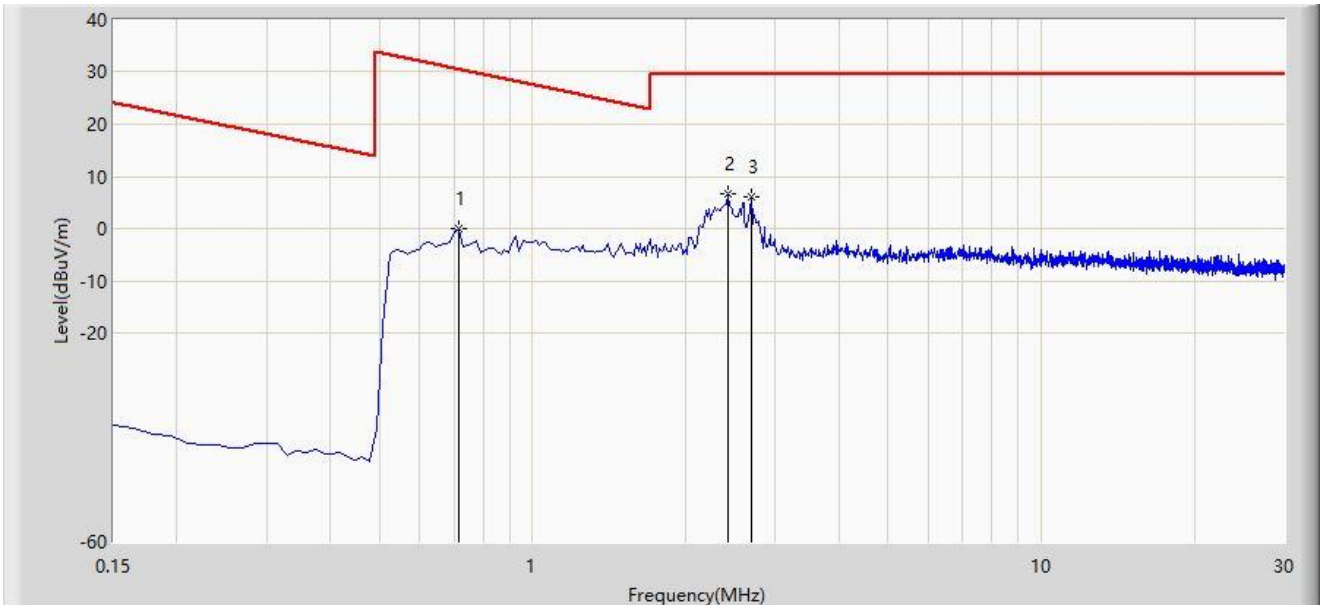

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.717	-0.068	21.750	-30.571	30.503	-21.818	PK
2	*	2.419	6.703	28.518	-22.797	29.500	-21.815	PK
3		2.687	6.104	27.905	-23.396	29.500	-21.802	PK


Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Karl Gao
Probe: FMZB1519_0.009-30 MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

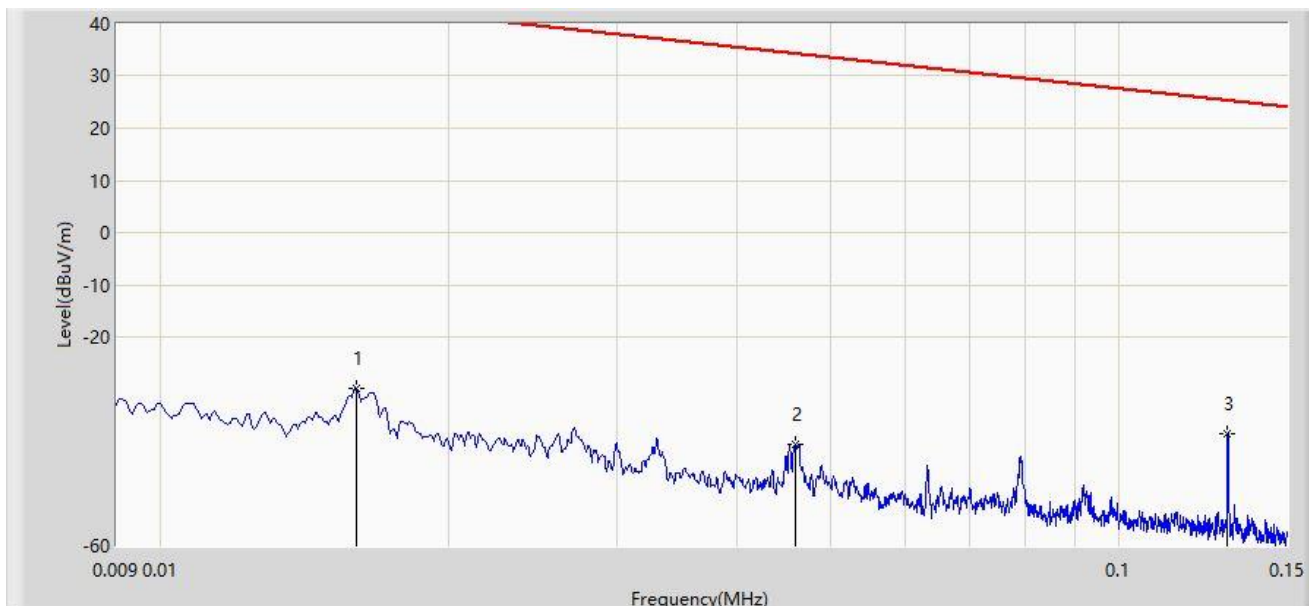

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.016	-29.890	29.924	-73.395	43.505	-59.813	PK
2		0.046	-40.462	21.463	-74.799	34.337	-61.924	PK
3	*	0.130	-38.596	23.551	-63.914	25.319	-62.147	PK


Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Karl Gao
Probe: FMZB1519_0.009-30 MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

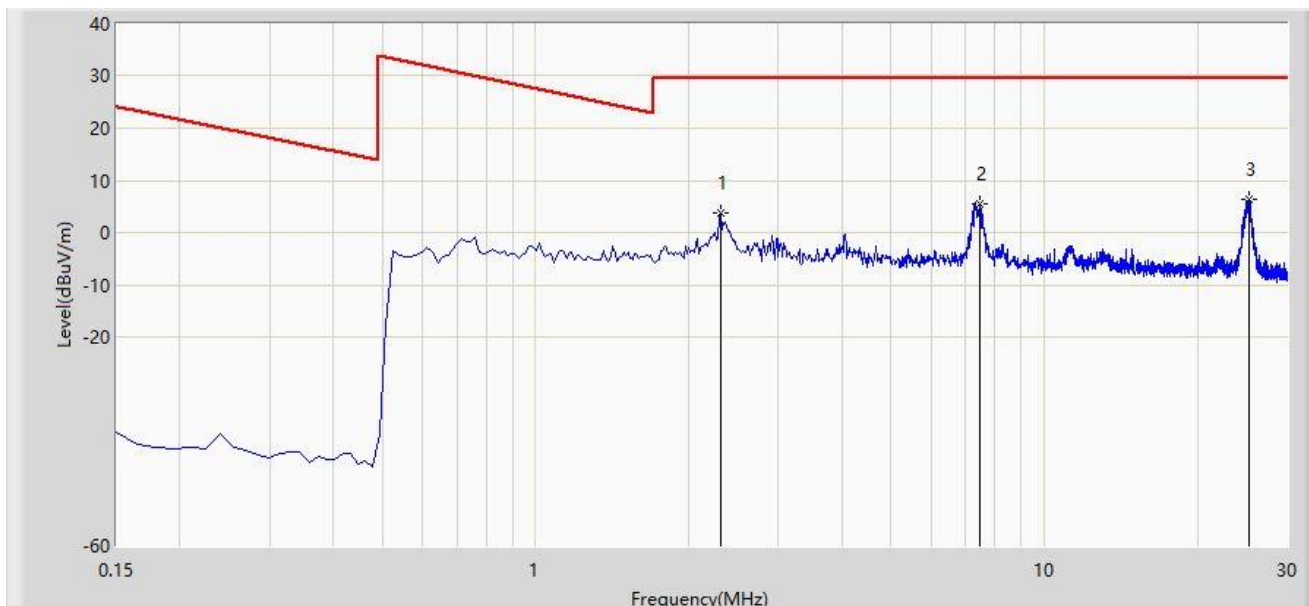

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2.314	3.754	25.575	-25.746	29.500	-21.821	PK
2		7.463	5.585	27.531	-23.915	29.500	-21.946	PK
3	*	25.194	6.384	28.469	-23.116	29.500	-22.085	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Emission for 30 MHz ~ 1 GHz:

Site: WZ-AC2	Test Date: 2024-01-30
Limit: FCC_Part15.209_RSE (3 m)	Engineer: Karl Gao
Probe: VULB9162_30-7000 MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

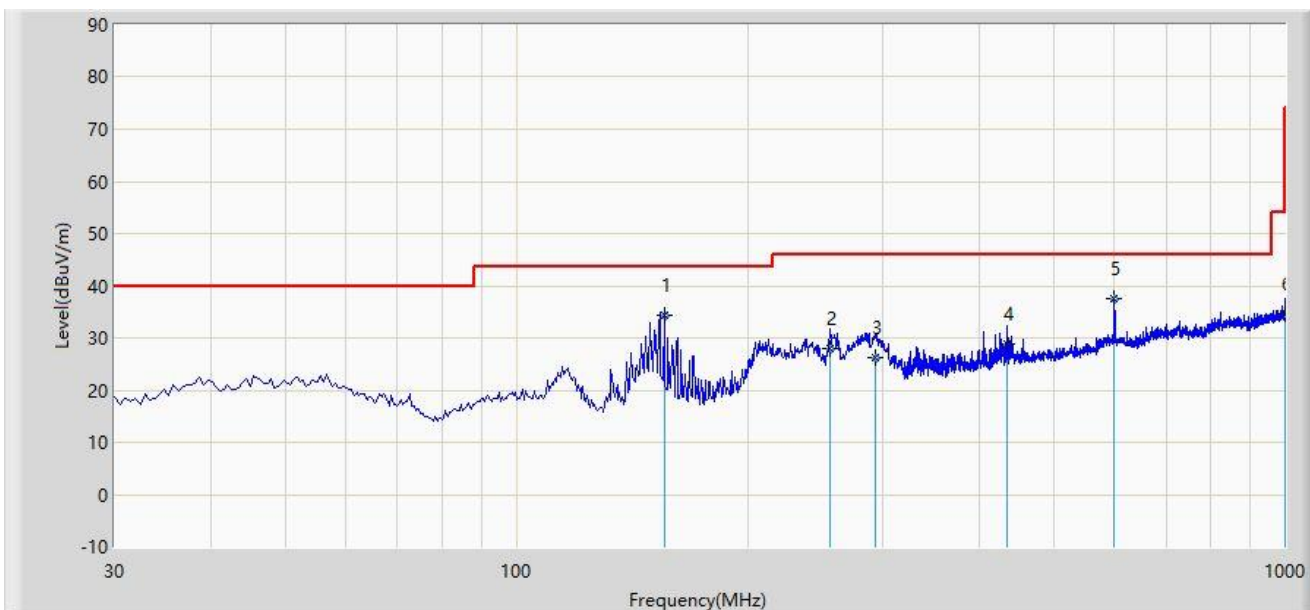


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		155.600	34.331	18.900	-9.169	43.500	15.431	QP
2		256.100	27.901	7.600	-18.099	46.000	20.301	QP
3		292.700	26.174	5.300	-19.826	46.000	20.875	QP
4		434.100	28.836	4.900	-17.164	46.000	23.936	QP
5	*	599.900	37.658	10.100	-8.342	46.000	27.558	QP
6		1000.000	34.517	1.300	-19.483	54.000	33.217	QP

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-30
Limit: FCC_Part15.209_RSE (3 m)	Engineer: Karl Gao
Probe: VULB9162_30-7000 MHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

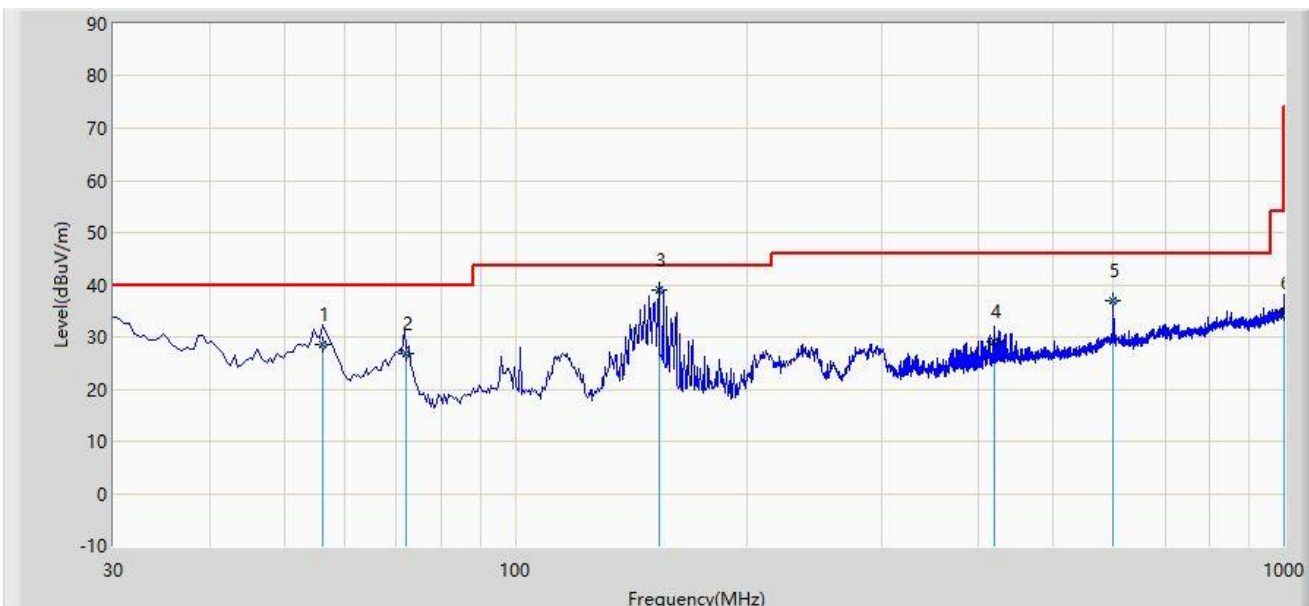

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		56.140	28.610	8.600	-11.390	40.000	20.010	QP
2		72.100	26.845	11.300	-13.155	40.000	15.544	QP
3	*	153.600	38.936	23.600	-4.564	43.500	15.337	QP
4		419.900	29.156	5.300	-16.844	46.000	23.856	QP
5		600.100	36.953	9.400	-9.047	46.000	27.554	QP
6		1000.000	34.617	1.400	-19.383	54.000	33.217	QP


Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

The Result of Radiated Emission for 18 ~ 40 GHz:

Site: WZ-AC2	Test Date: 2024-01-30
Limit: FCC_Part15.209_RSE (3 m)	Engineer: Karl Gao
Probe: BBHA9170_549_18-40 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

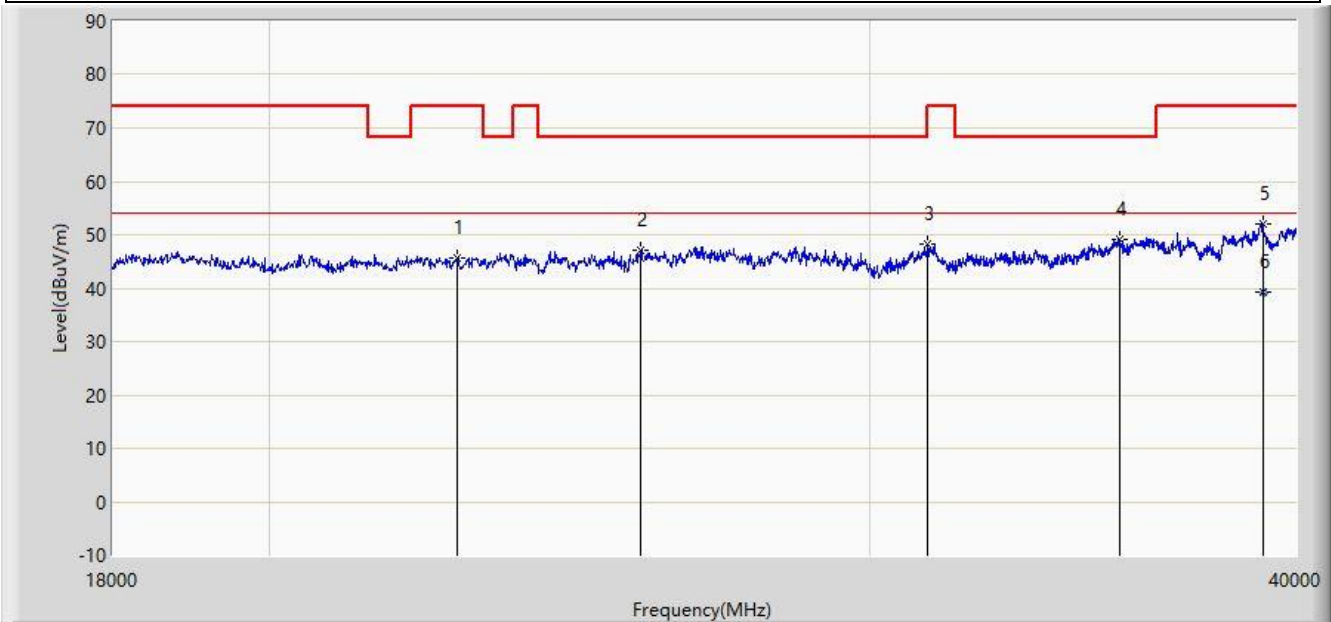

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		22708.000	45.527	53.223	-28.473	74.000	-7.696	PK
2		25711.000	47.147	53.804	-21.053	68.200	-6.657	PK
3		31211.000	48.302	54.219	-25.698	74.000	-5.917	PK
4		35512.000	49.262	55.637	-18.938	68.200	-6.375	PK
5		39120.000	52.002	52.911	-21.998	74.000	-0.909	PK
6	*	39120.000	39.330	40.239	-14.670	54.000	-0.909	AV


Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Site: WZ-AC2	Test Date: 2024-01-30
Limit: FCC_Part15.209_RSE (3 m)	Engineer: Karl Gao
Probe: BBHA9170_549_18-40 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

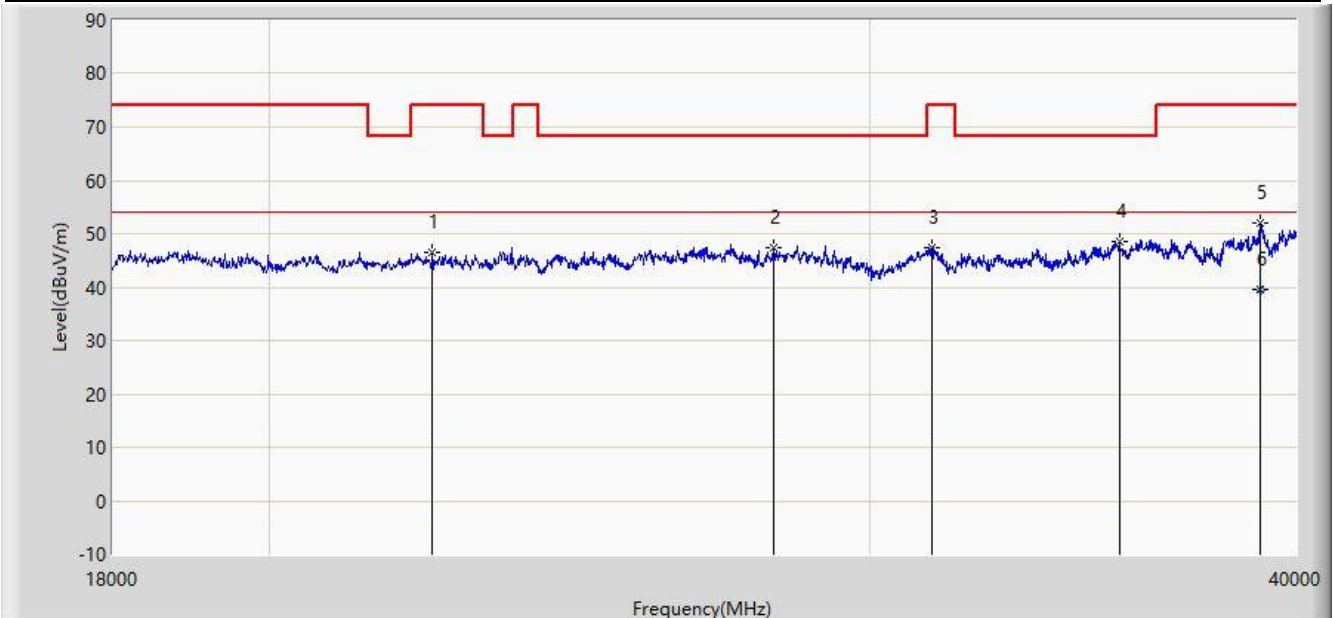

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		22334.000	46.571	54.799	-27.429	74.000	-8.228	PK
2		28131.000	47.263	54.435	-20.937	68.200	-7.173	PK
3		31277.000	47.307	53.047	-26.693	74.000	-5.740	PK
4		35512.000	48.576	54.951	-19.624	68.200	-6.375	PK
5		39065.000	52.013	52.833	-21.987	74.000	-0.820	PK
6	*	39065.000	39.449	40.269	-14.551	54.000	-0.820	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

A.7 Radiated Restricted Band Edge Test Result

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

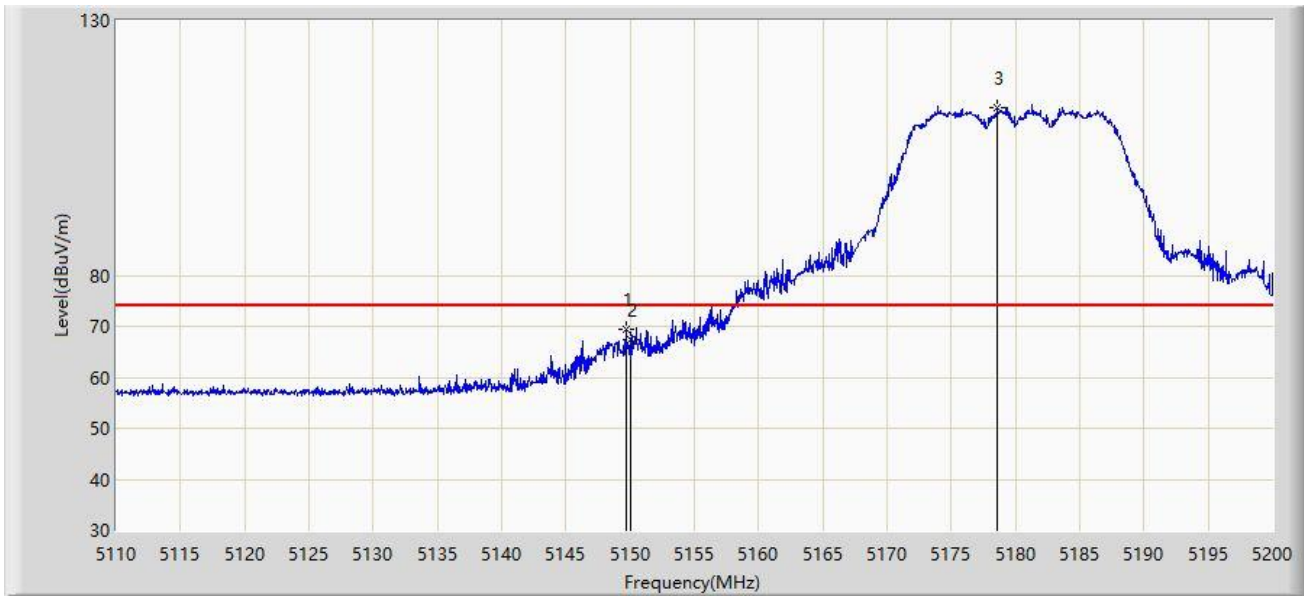


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.645	69.319	65.839	-4.681	74.000	3.481	PK
2		5150.000	67.408	63.926	-6.592	74.000	3.482	PK
3		5178.625	112.868	109.571	N/A	N/A	3.298	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

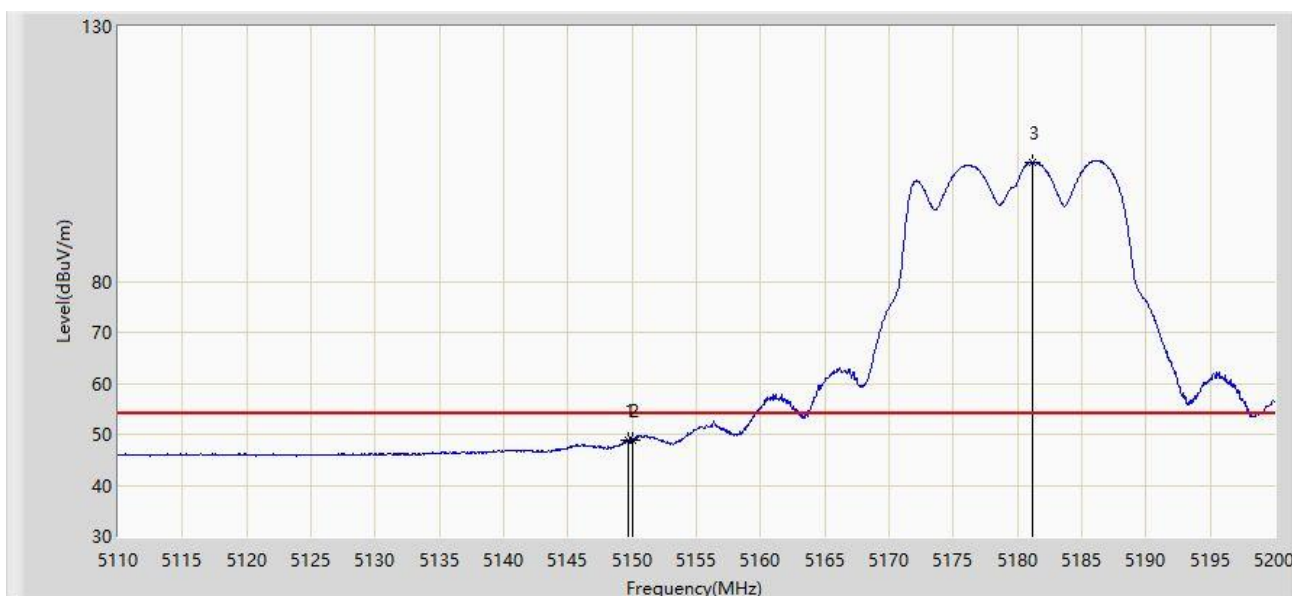


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.690	48.902	45.421	-5.098	54.000	3.482	AV
2		5150.000	48.862	45.380	-5.138	54.000	3.482	AV
3		5181.190	103.280	100.034	N/A	N/A	3.246	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

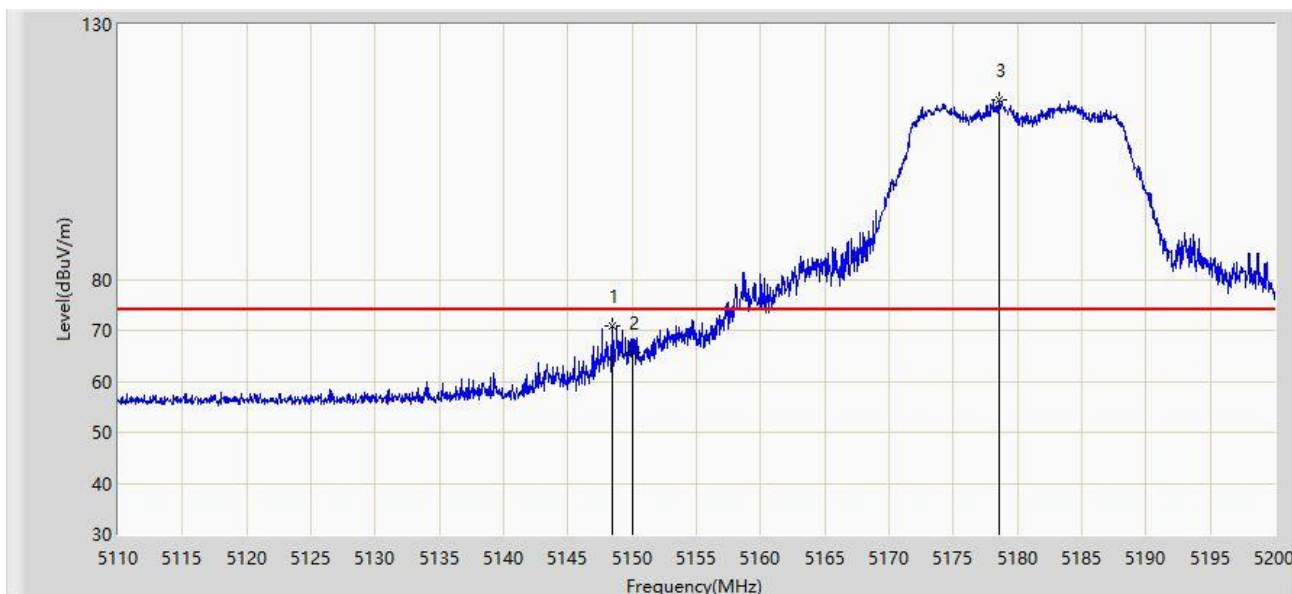


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.475	70.880	67.403	-3.120	74.000	3.477	PK
2		5150.000	65.693	62.211	-8.307	74.000	3.482	PK
3		5178.535	115.107	111.808	N/A	N/A	3.299	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5180 MHz	

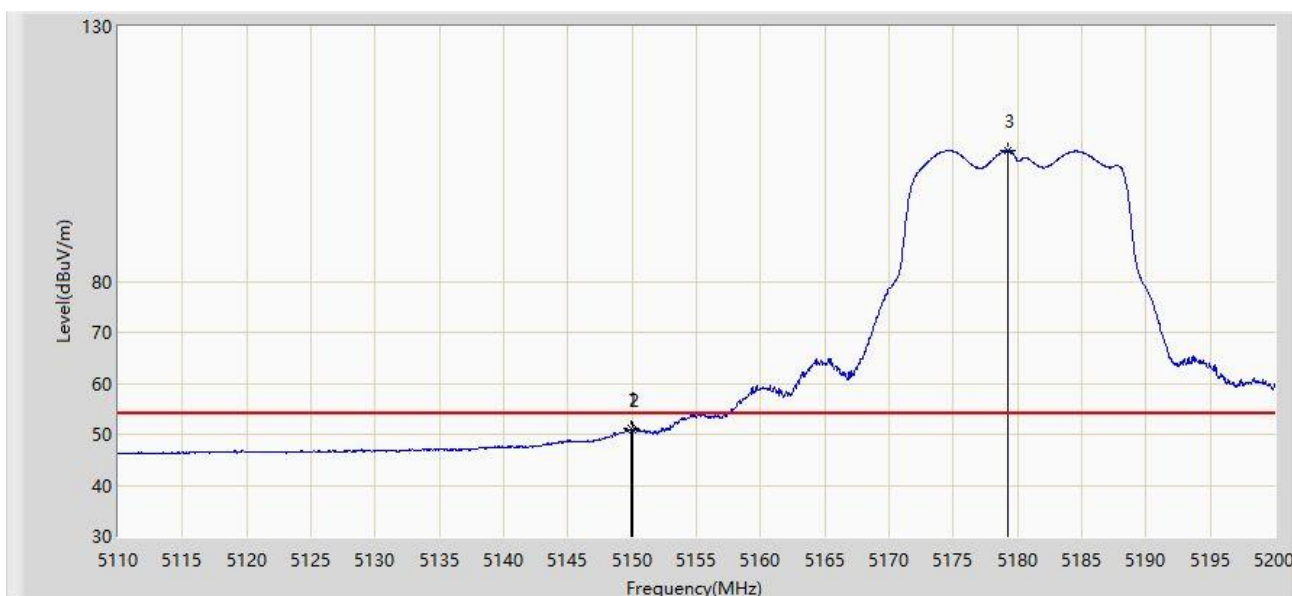


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.960	51.094	47.613	-2.906	54.000	3.482	AV
2		5150.000	51.013	47.531	-2.987	54.000	3.482	AV
3		5179.255	105.650	102.365	N/A	N/A	3.284	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5320 MHz	

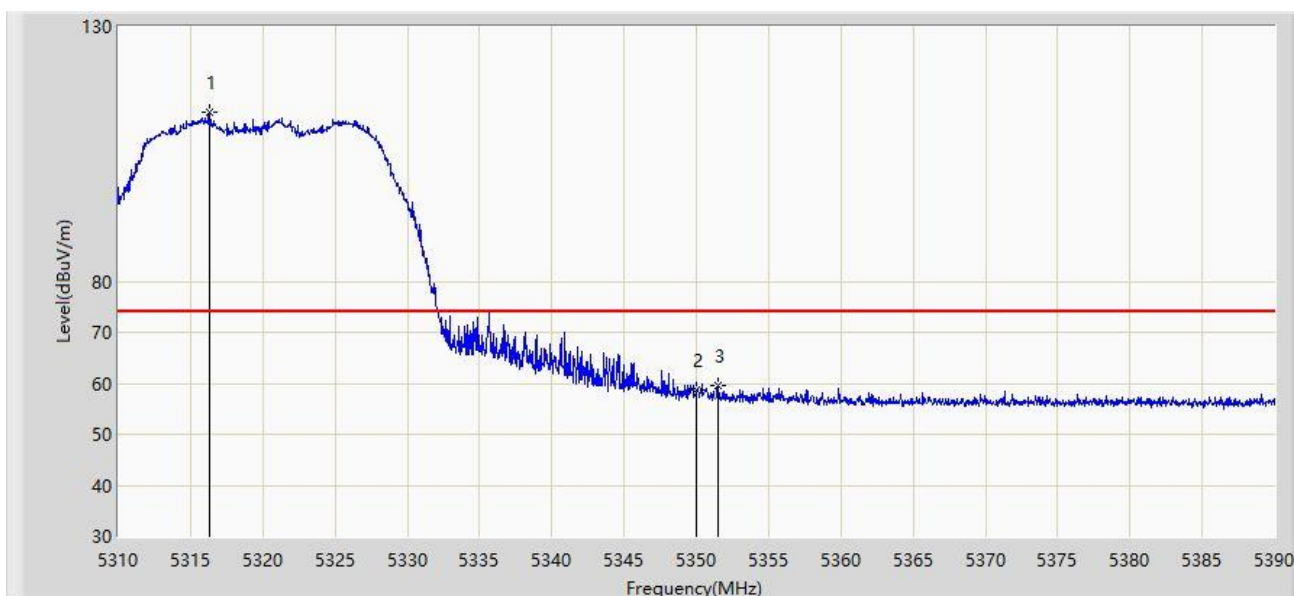


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5316.360	113.094	110.113	N/A	N/A	2.981	PK
2		5350.000	58.682	55.862	-15.318	74.000	2.820	PK
3	*	5351.480	59.498	56.703	-14.502	74.000	2.795	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5320 MHz	

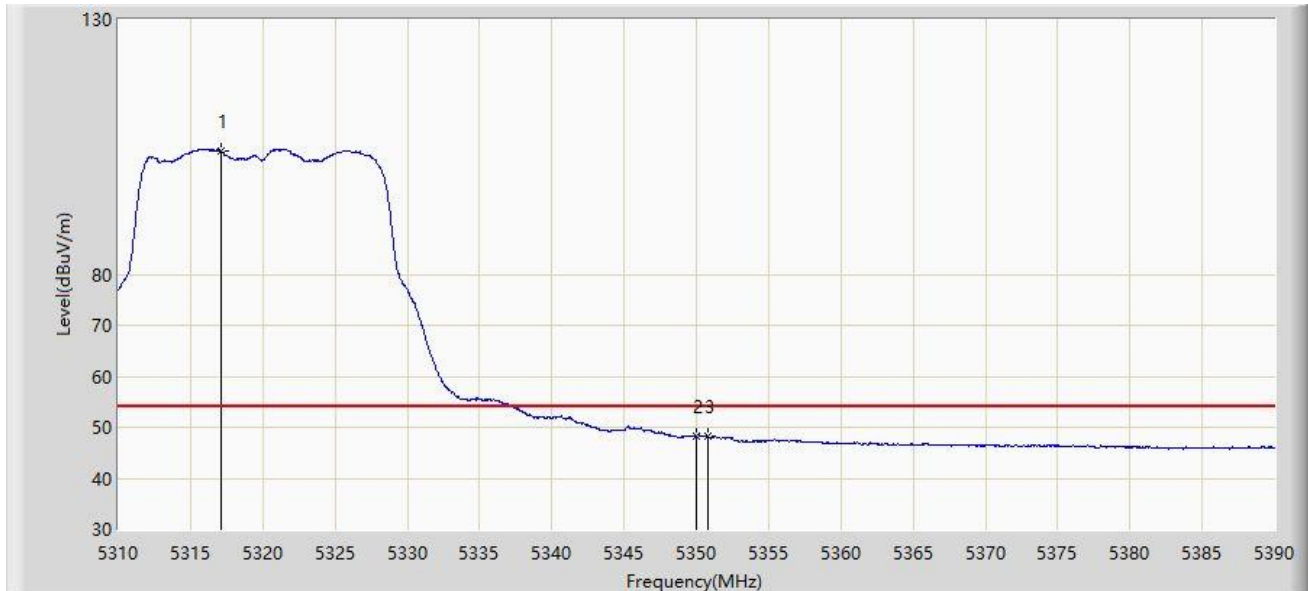


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.160	104.111	101.116	N/A	N/A	2.996	AV
2		5350.000	48.220	45.400	-5.780	54.000	2.820	AV
3	*	5350.760	48.248	45.441	-5.752	54.000	2.806	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5320 MHz	

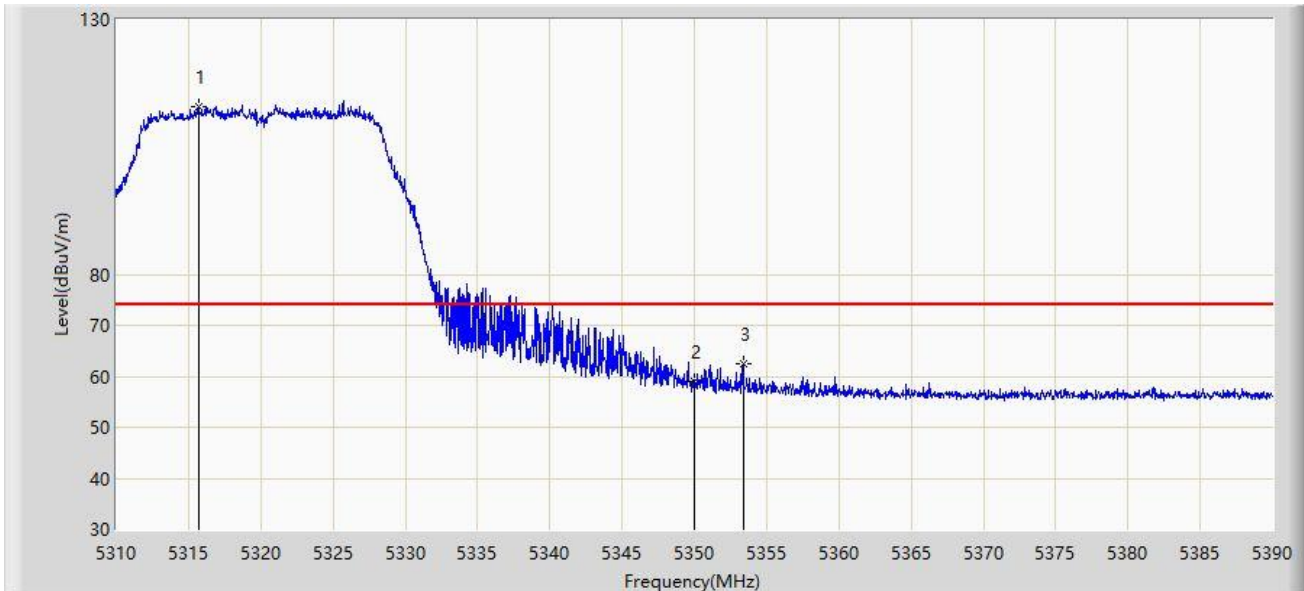


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5315.680	112.924	109.954	N/A	N/A	2.969	PK
2		5350.000	58.873	56.053	-15.127	74.000	2.820	PK
3	*	5353.360	62.466	59.674	-11.534	74.000	2.793	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11a at 5320 MHz	

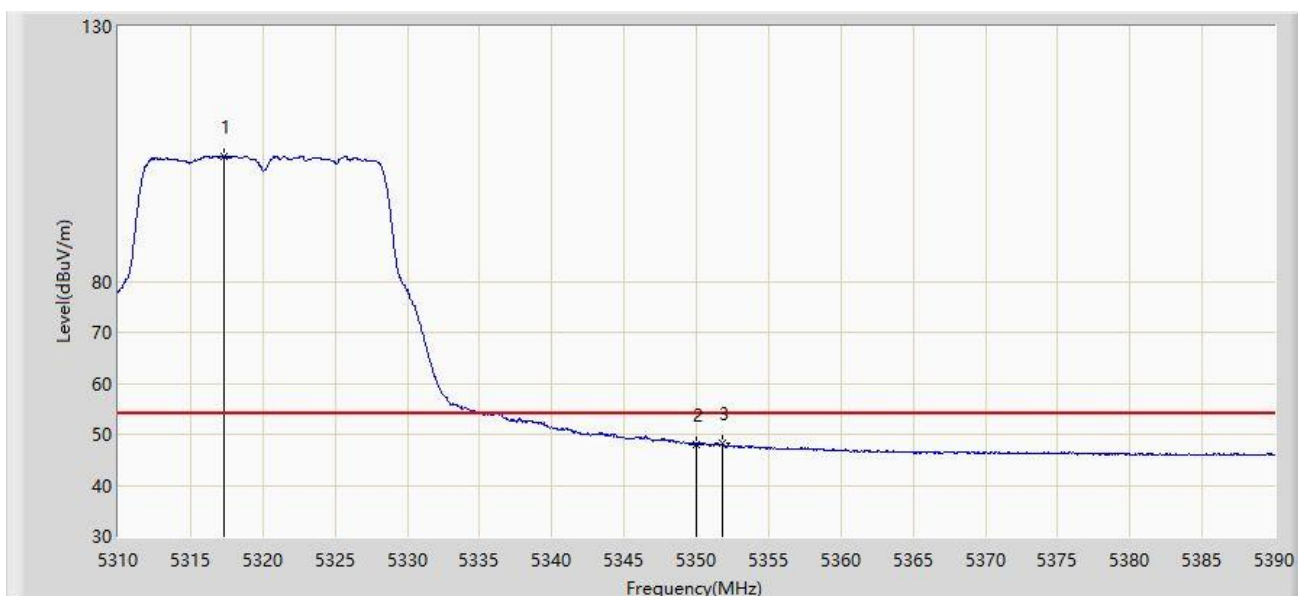


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.280	104.445	101.447	N/A	N/A	2.998	AV
2		5350.000	47.980	45.160	-6.020	54.000	2.820	AV
3	*	5351.760	48.132	45.342	-5.868	54.000	2.791	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180 MHz	

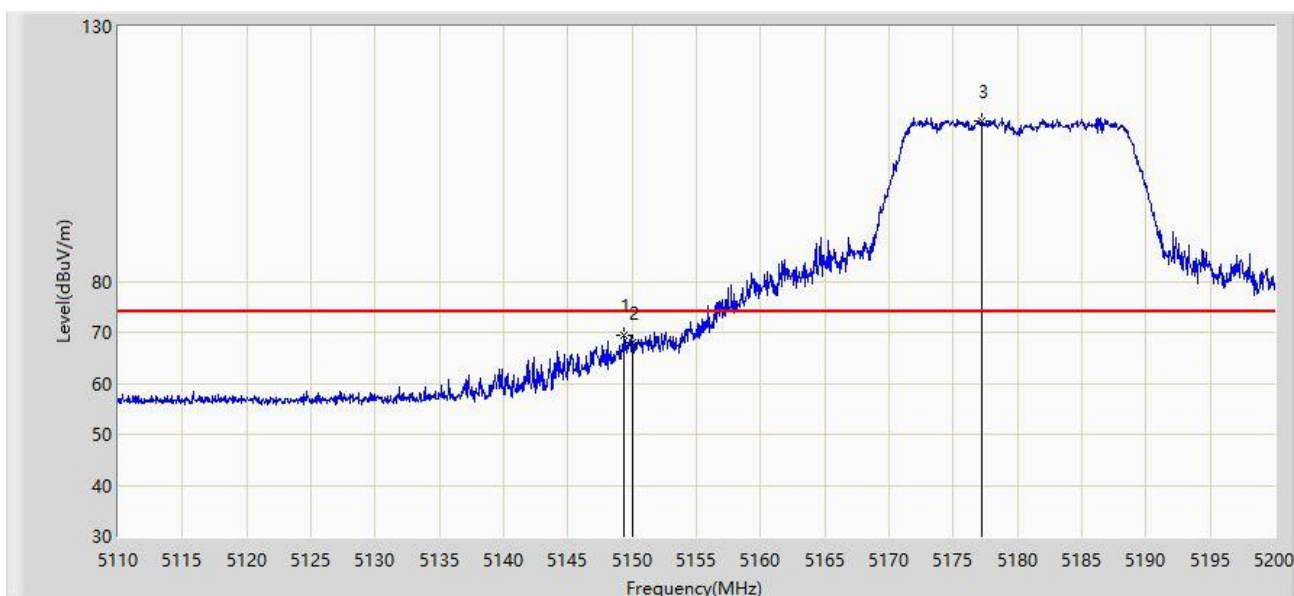


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.375	69.483	66.003	-4.517	74.000	3.480	PK
2		5150.000	67.874	64.392	-6.126	74.000	3.482	PK
3		5177.230	111.567	108.242	N/A	N/A	3.325	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180 MHz	

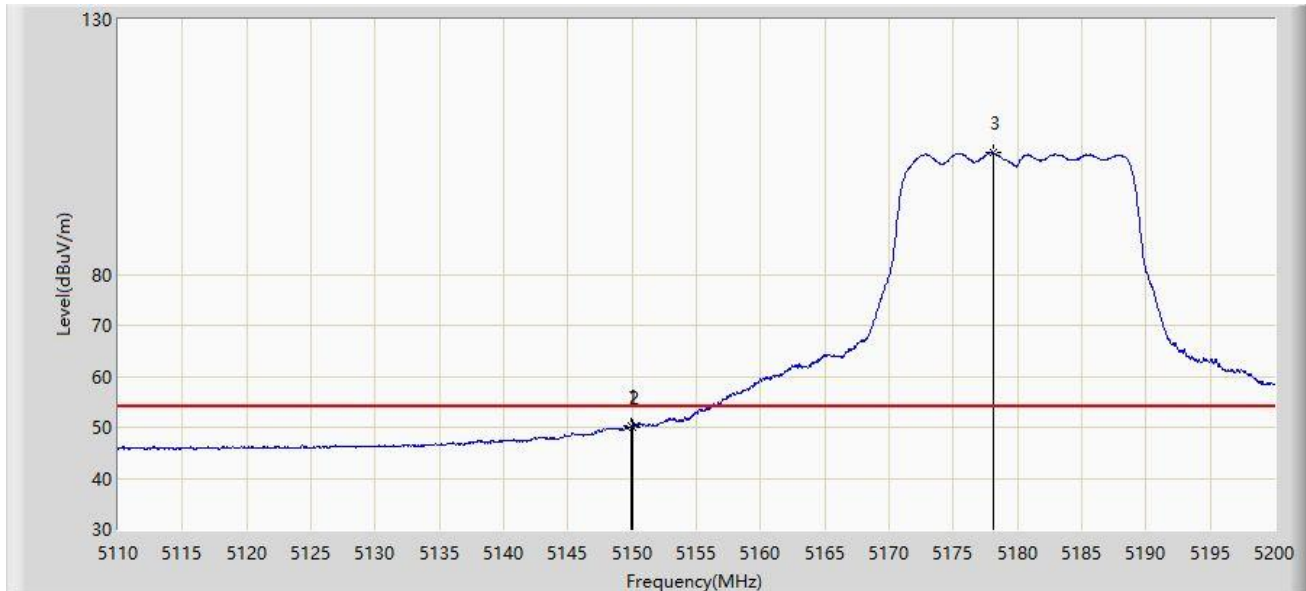


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.870	50.183	46.702	-3.817	54.000	3.482	AV
2		5150.000	50.131	46.649	-3.869	54.000	3.482	AV
3		5178.130	103.779	100.472	N/A	N/A	3.307	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180 MHz	

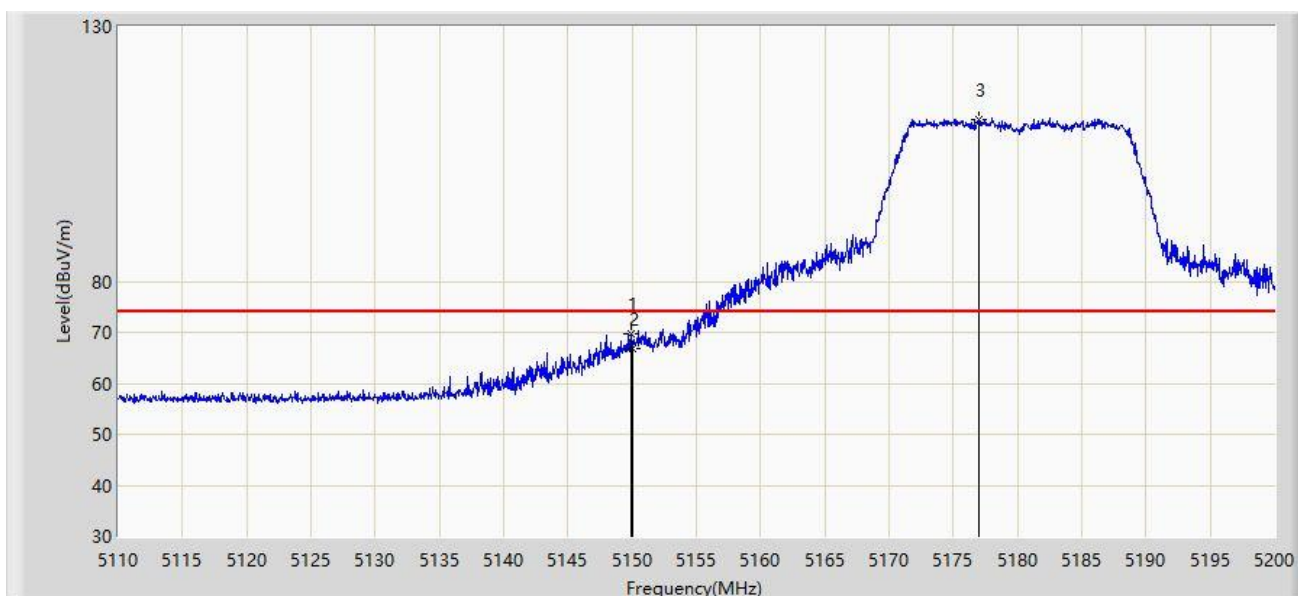


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.870	69.667	66.186	-4.333	74.000	3.482	PK
2		5150.000	66.905	63.423	-7.095	74.000	3.482	PK
3		5177.005	111.722	108.392	N/A	N/A	3.330	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180 MHz	

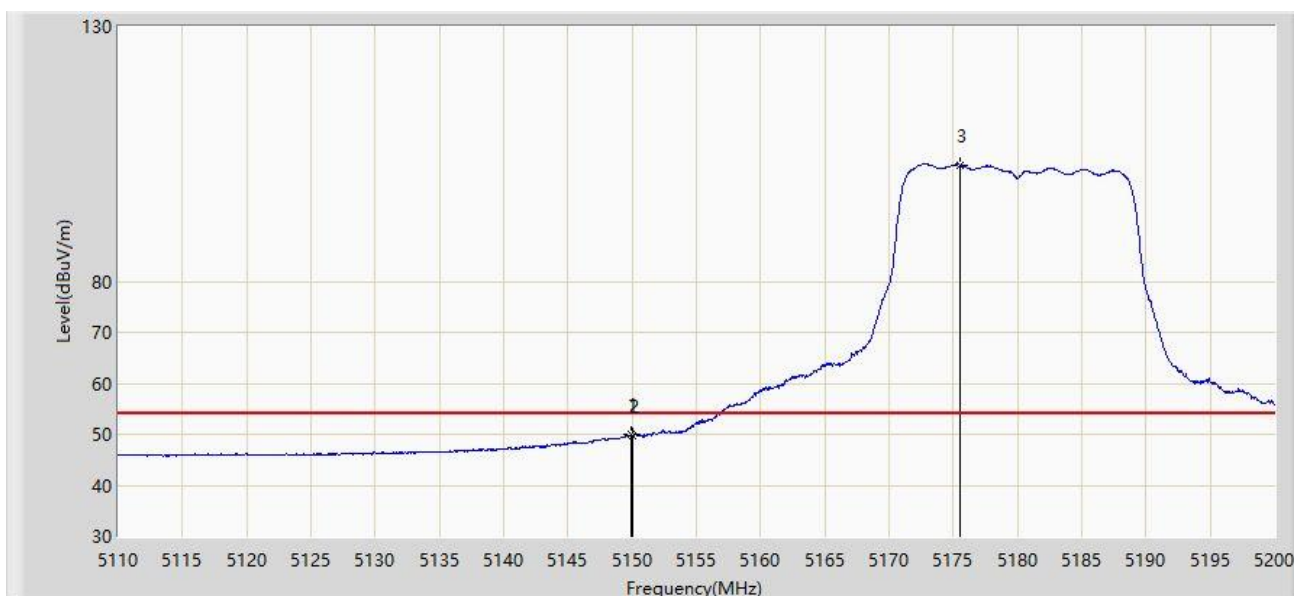


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.915	50.071	46.590	-3.929	54.000	3.482	AV
2		5150.000	49.840	46.358	-4.160	54.000	3.482	AV
3		5175.475	102.885	99.525	N/A	N/A	3.360	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320 MHz	

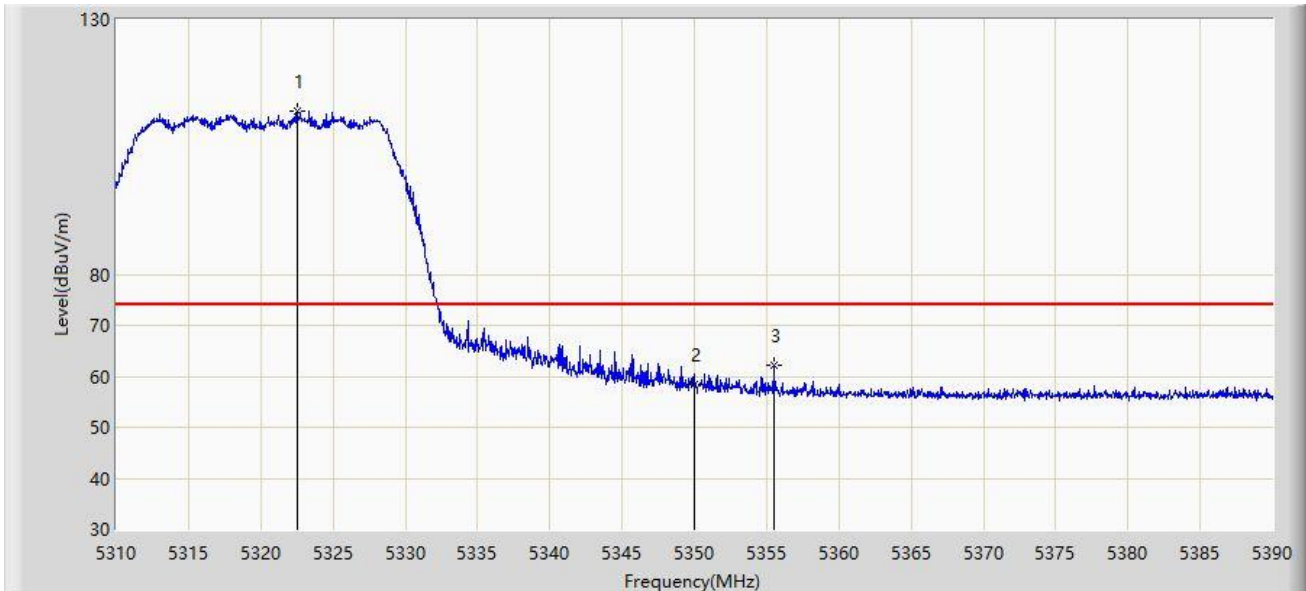


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5322.560	112.171	109.168	N/A	N/A	3.002	PK
2		5350.000	58.426	55.606	-15.574	74.000	2.820	PK
3	*	5355.520	62.294	59.492	-11.706	74.000	2.802	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320 MHz	

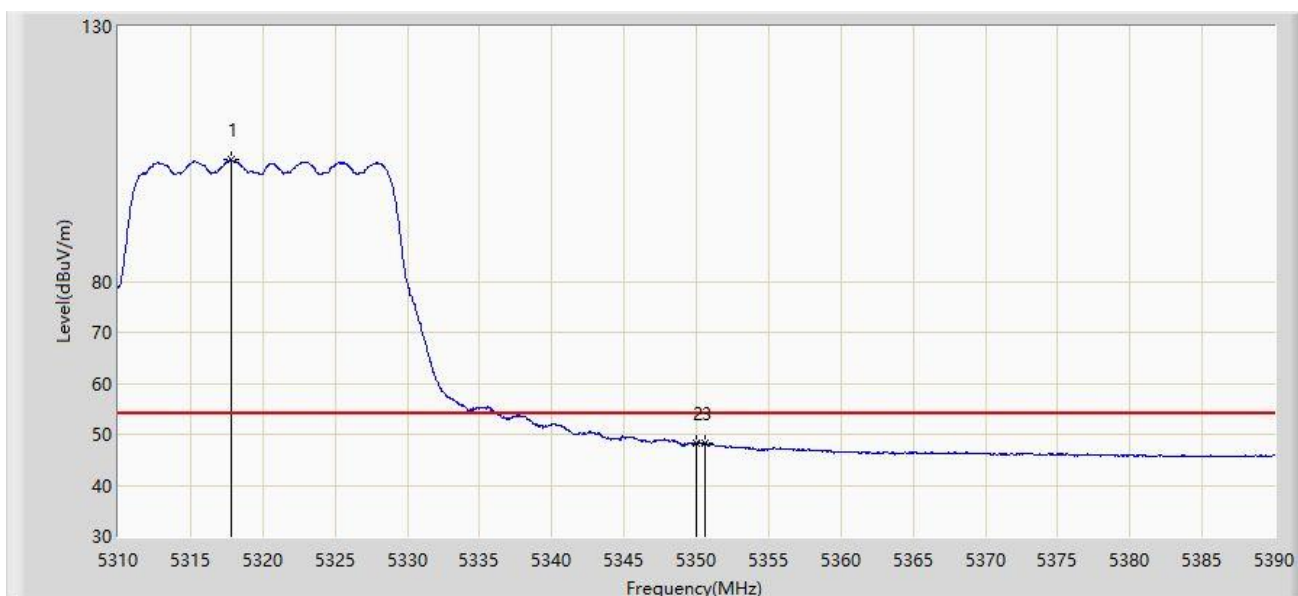


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.800	103.819	100.812	N/A	N/A	3.007	AV
2		5350.000	48.232	45.412	-5.768	54.000	2.820	AV
3	*	5350.640	48.336	45.527	-5.664	54.000	2.810	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320 MHz	

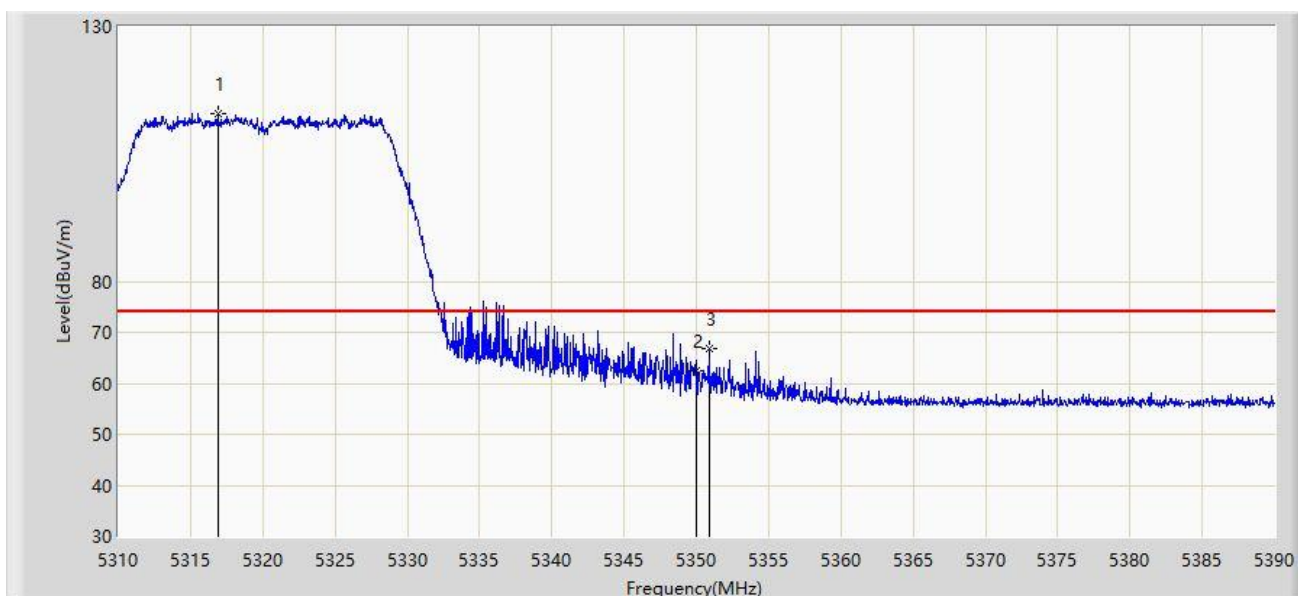


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5316.920	112.764	109.773	N/A	N/A	2.990	PK
2		5350.000	62.401	59.581	-11.599	74.000	2.820	PK
3	*	5350.880	66.850	64.045	-7.150	74.000	2.804	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320 MHz	

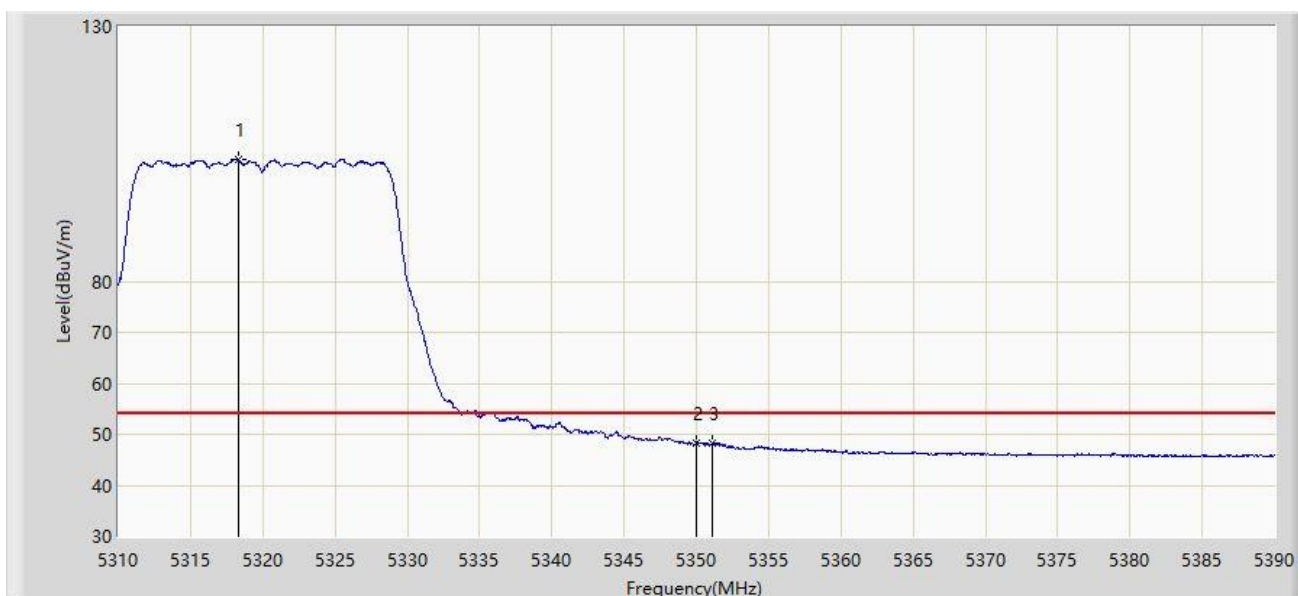


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.280	103.771	100.761	N/A	N/A	3.010	AV
2		5350.000	48.292	45.472	-5.708	54.000	2.820	AV
3	*	5351.120	48.303	45.502	-5.697	54.000	2.801	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190 MHz	

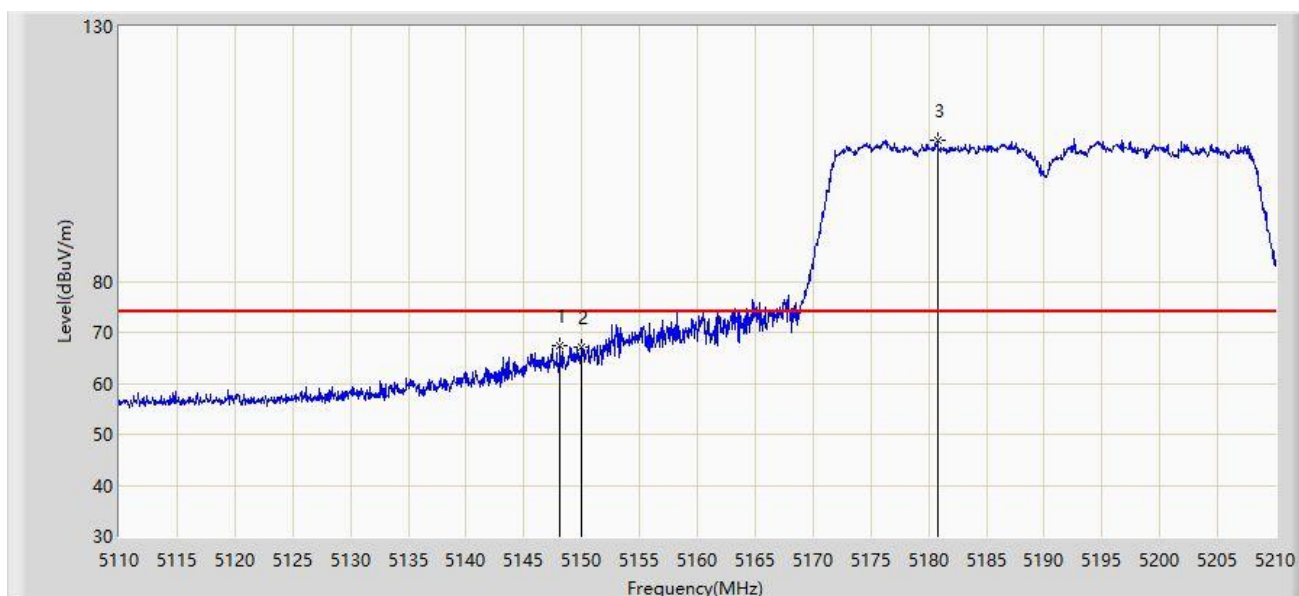


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.100	67.420	63.944	-6.580	74.000	3.476	PK
2		5150.000	67.228	63.746	-6.772	74.000	3.482	PK
3		5180.800	107.772	104.518	N/A	N/A	3.254	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190 MHz	

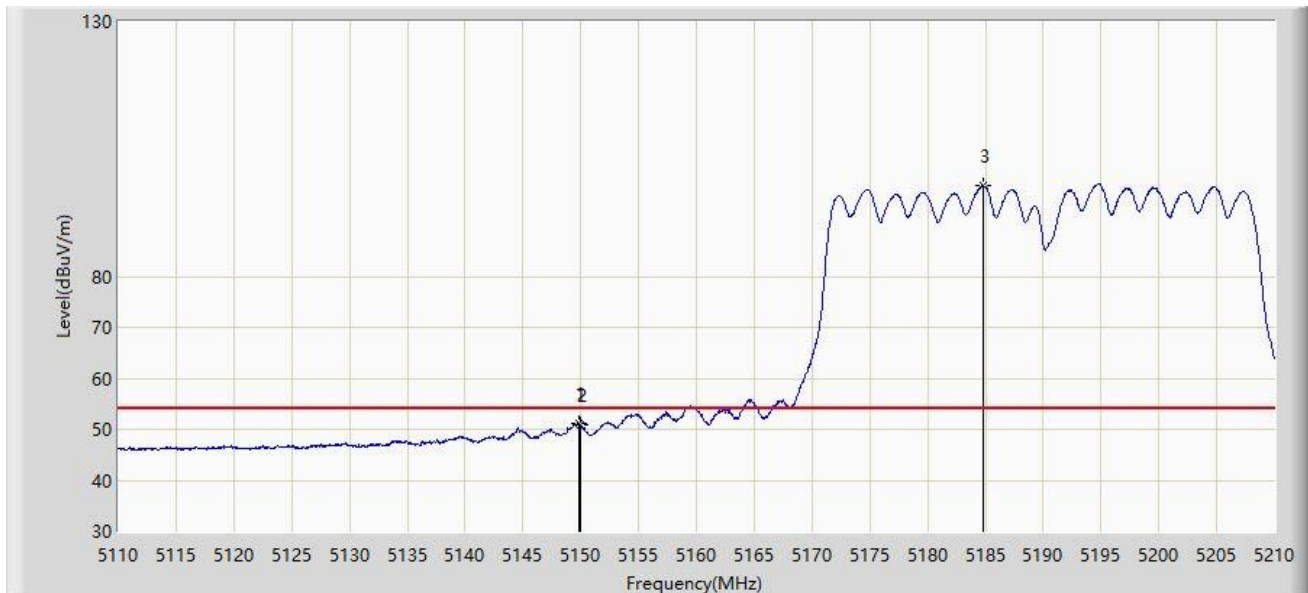


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.800	51.129	47.648	-2.871	54.000	3.481	AV
2		5150.000	50.742	47.260	-3.258	54.000	3.482	AV
3		5184.800	97.909	94.744	N/A	N/A	3.165	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190 MHz	

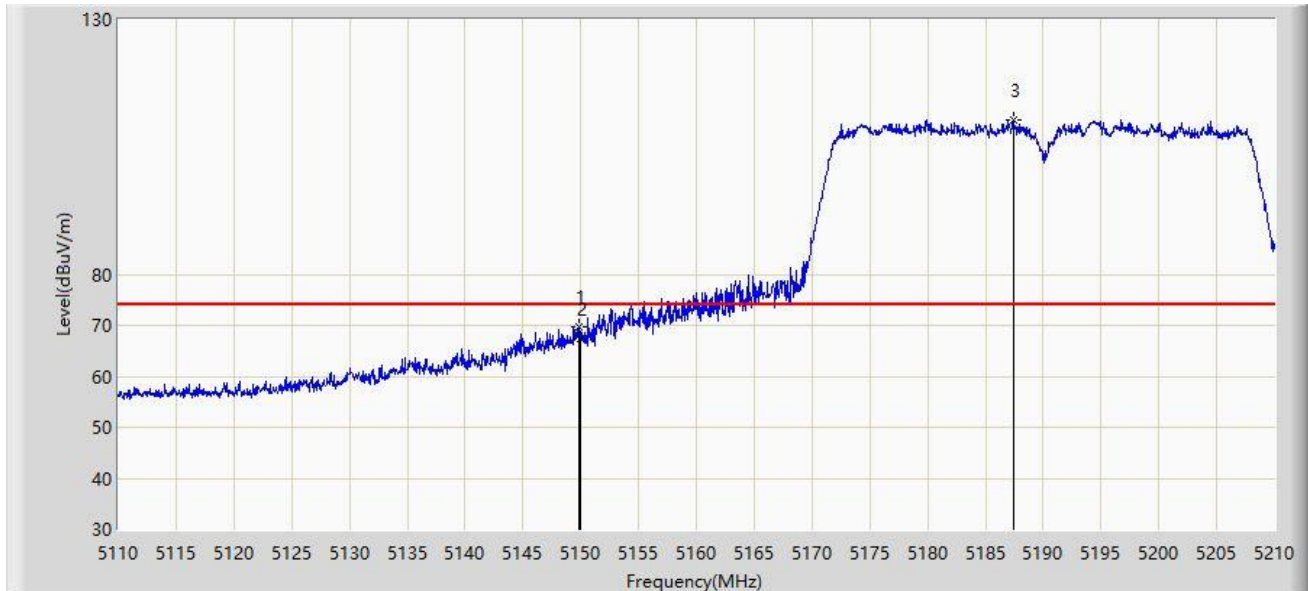


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.900	69.807	66.326	-4.193	74.000	3.482	PK
2		5150.000	67.536	64.054	-6.464	74.000	3.482	PK
3		5187.450	110.407	107.303	N/A	N/A	3.104	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190 MHz	

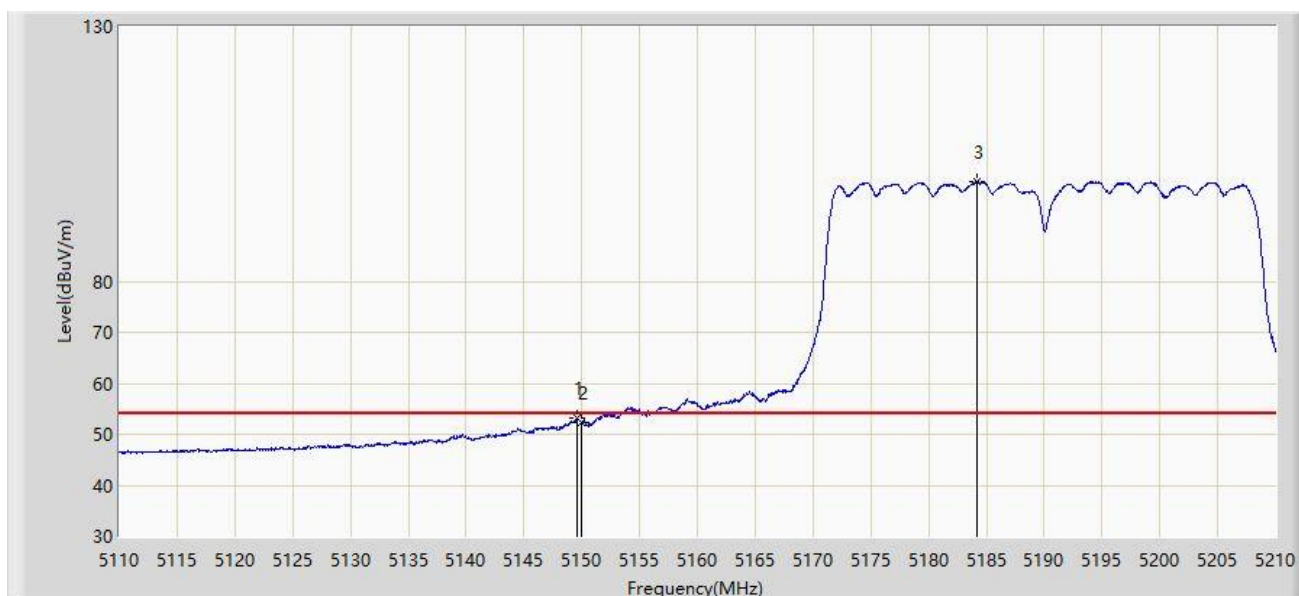


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.550	53.212	49.732	-0.788	54.000	3.480	AV
2		5150.000	52.381	48.899	-1.619	54.000	3.482	AV
3		5184.150	99.512	96.332	N/A	N/A	3.181	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310 MHz	

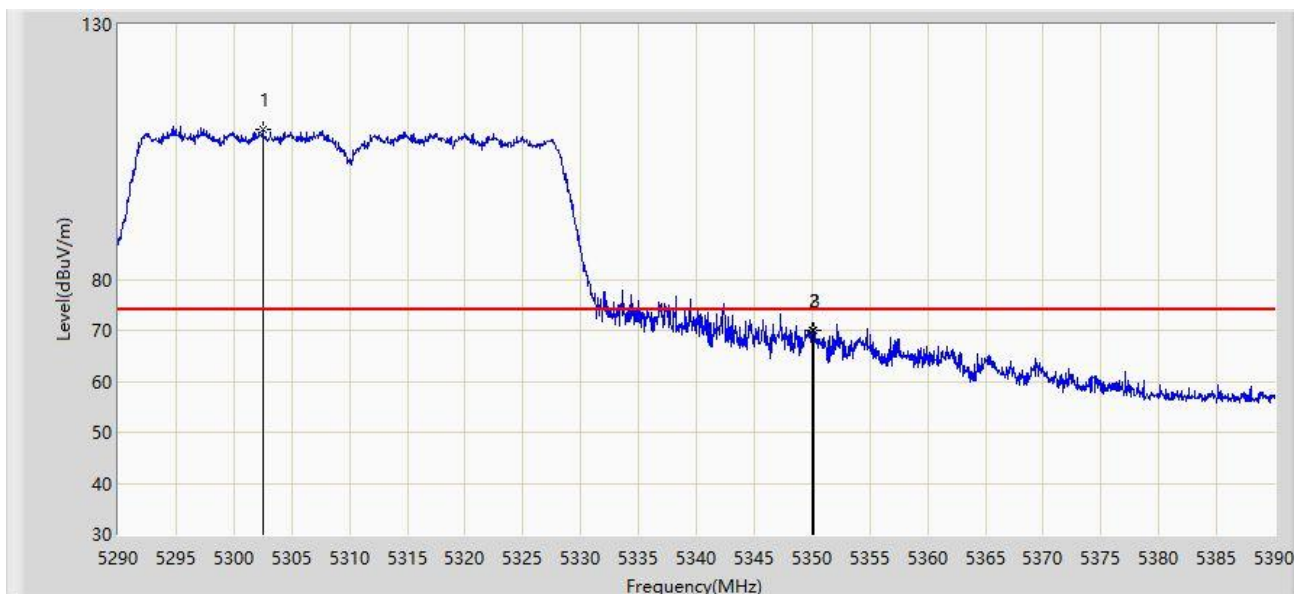


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5302.500	109.475	106.715	N/A	N/A	2.760	PK
2		5350.000	70.063	67.243	-3.937	74.000	2.820	PK
3	*	5350.200	70.141	67.325	-3.859	74.000	2.816	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310 MHz	

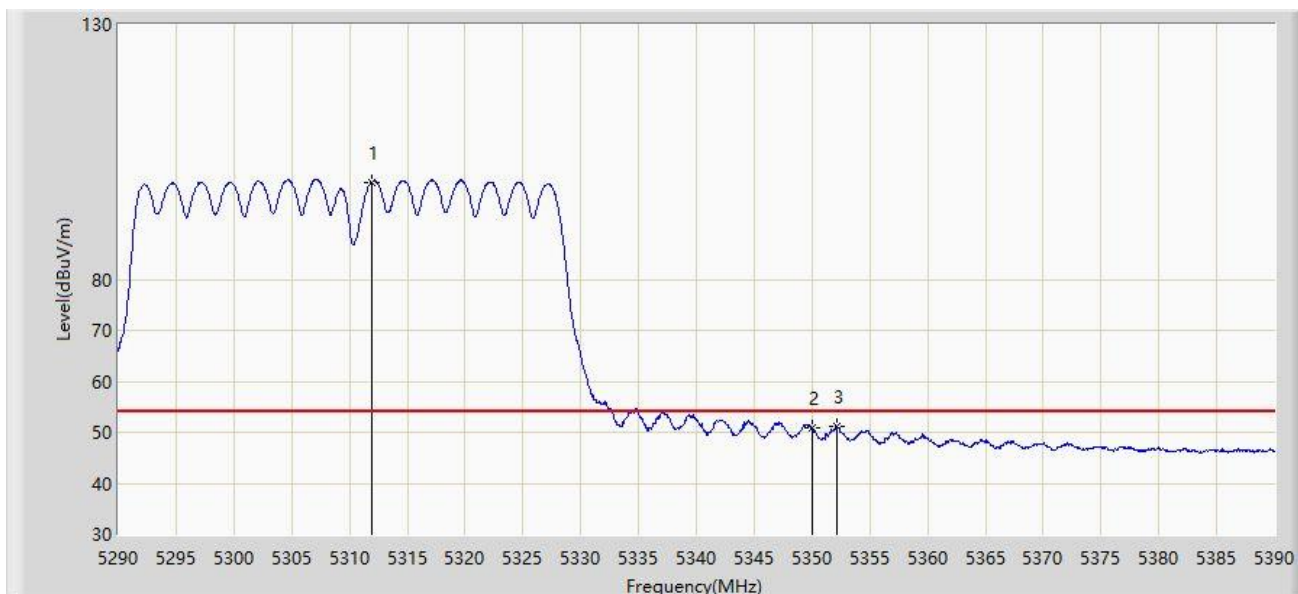


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.950	99.106	96.199	N/A	N/A	2.906	AV
2		5350.000	50.765	47.945	-3.235	54.000	2.820	AV
3	*	5352.100	51.299	48.512	-2.701	54.000	2.787	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310 MHz	

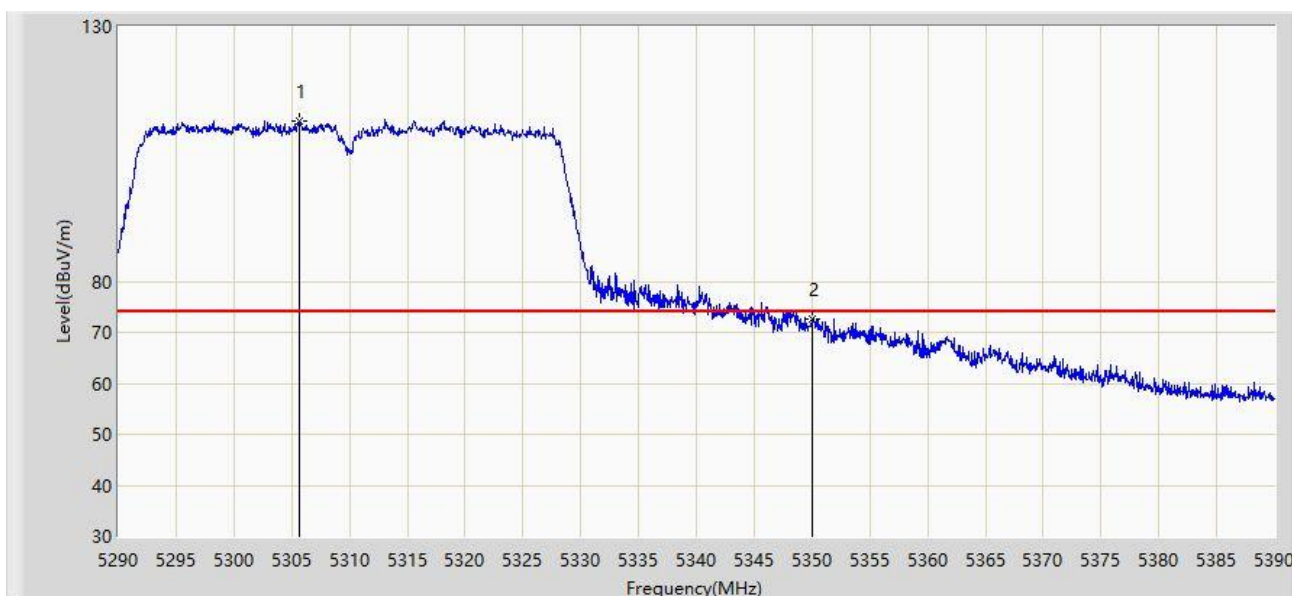


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5305.650	111.472	108.663	N/A	N/A	2.809	PK
2	*	5350.000	72.622	69.802	-1.378	74.000	2.820	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310 MHz	

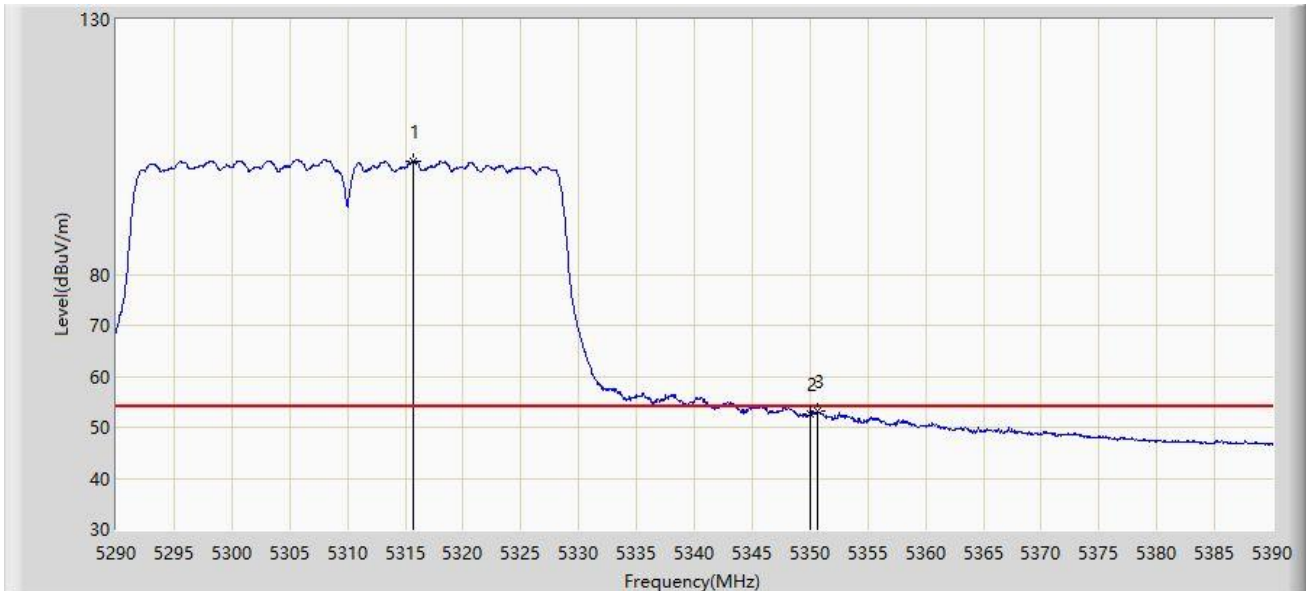


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5315.700	102.240	99.270	N/A	N/A	2.970	AV
2		5350.000	52.492	49.672	-1.508	54.000	2.820	AV
3	*	5350.650	53.096	50.287	-0.904	54.000	2.809	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210 MHz	

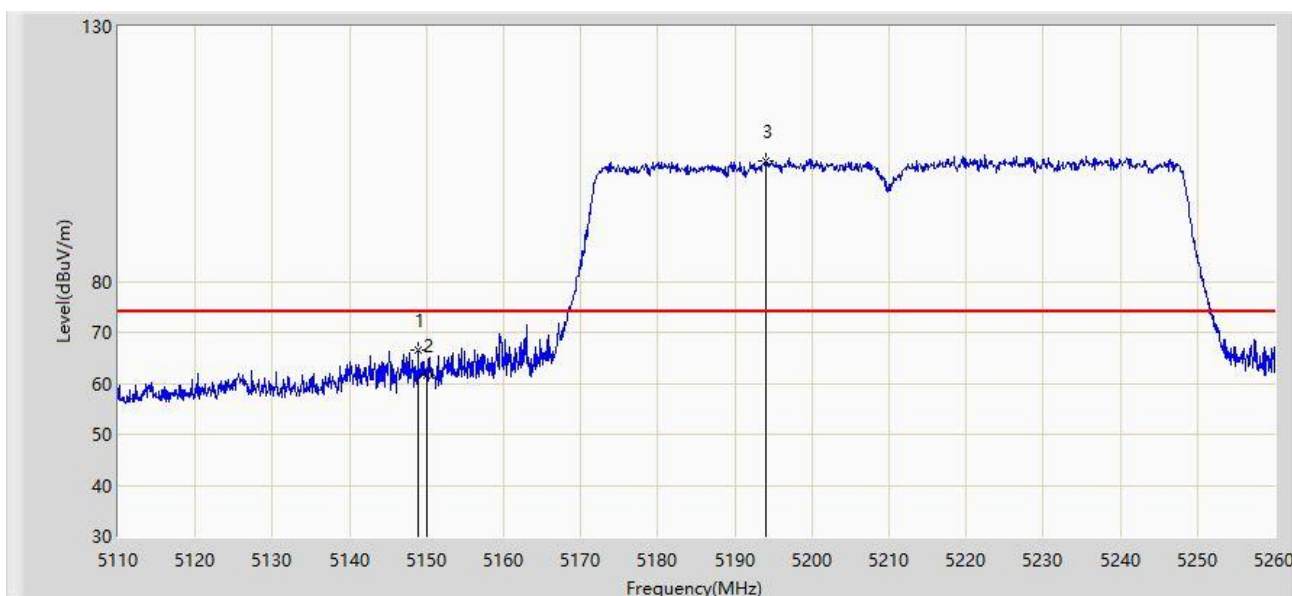


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.925	66.641	63.163	-7.359	74.000	3.478	PK
2		5150.000	61.623	58.141	-12.377	74.000	3.482	PK
3		5194.075	103.547	100.586	N/A	N/A	2.961	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210 MHz	

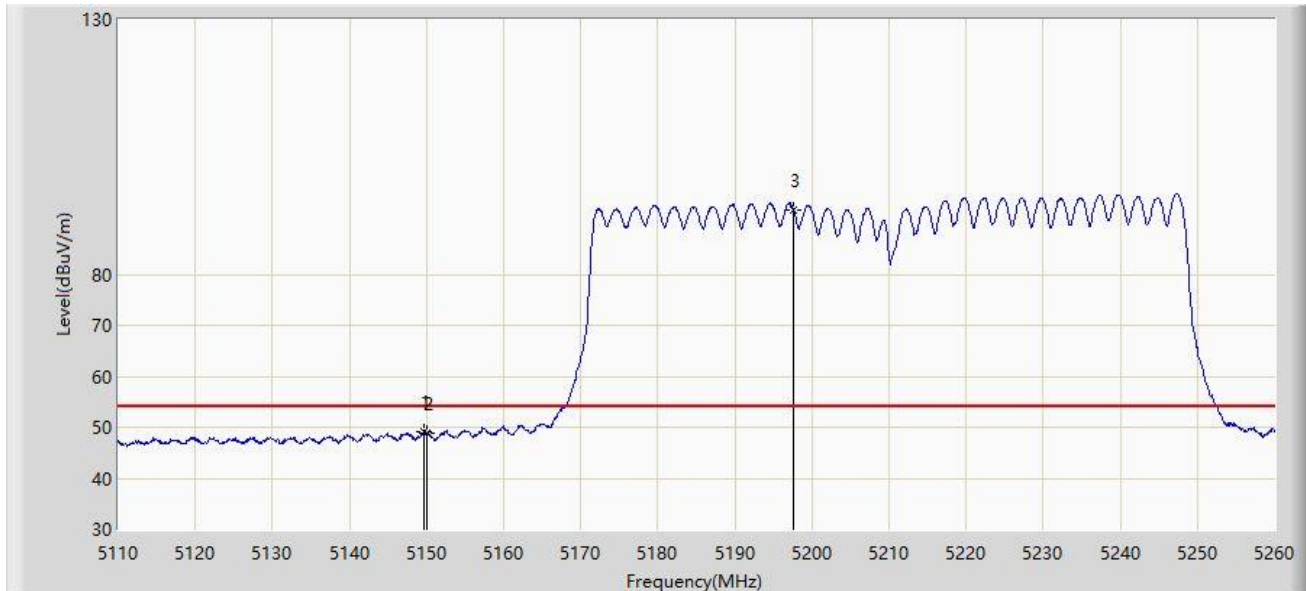


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.750	49.243	45.762	-4.757	54.000	3.481	AV
2		5150.000	48.750	45.268	-5.250	54.000	3.482	AV
3		5197.600	92.568	89.684	N/A	N/A	2.885	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210 MHz	

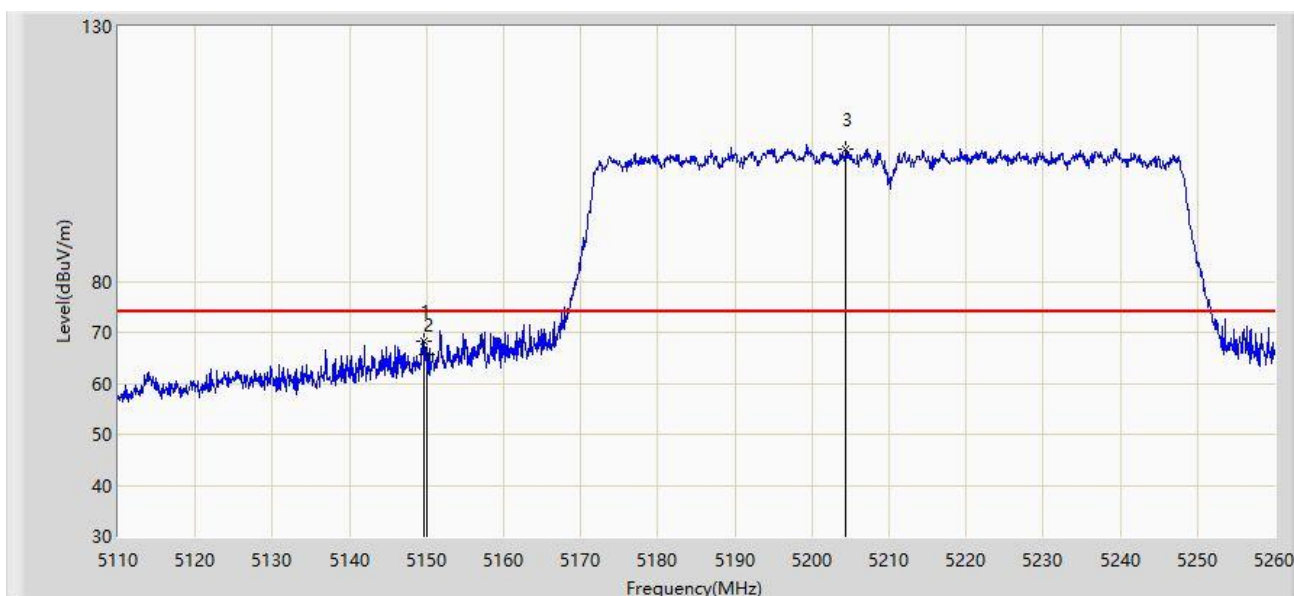


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.750	68.392	64.911	-5.608	74.000	3.481	PK
2		5150.000	65.614	62.132	-8.386	74.000	3.482	PK
3		5204.425	105.956	103.081	N/A	N/A	2.875	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-15
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210 MHz	

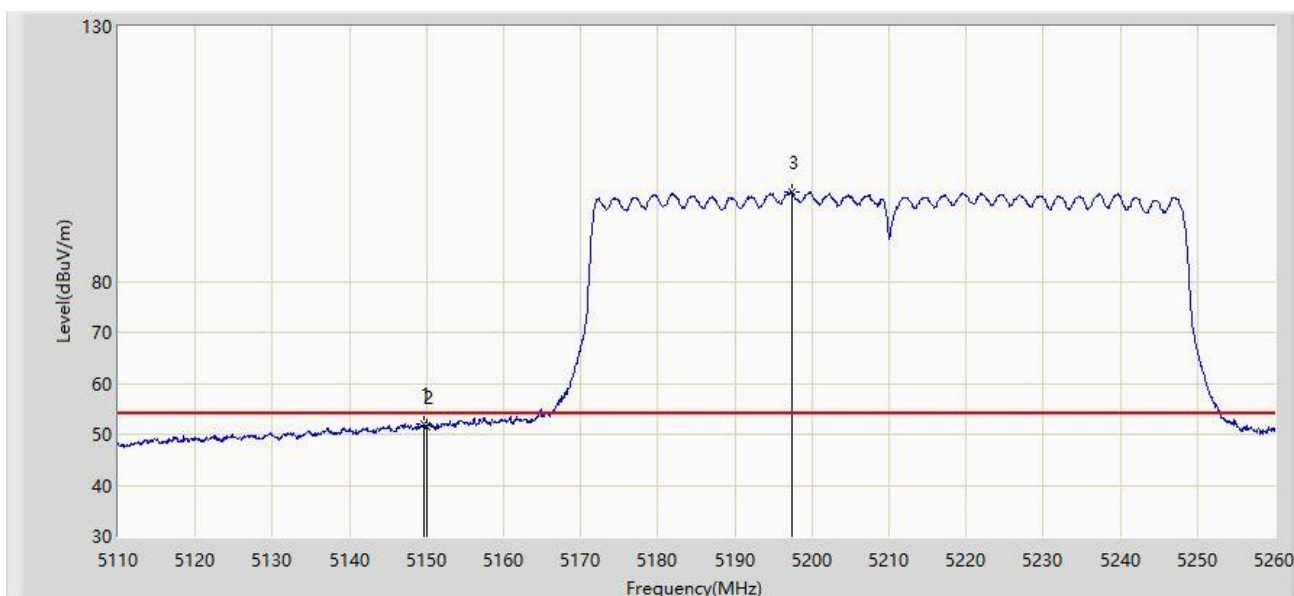


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.600	52.021	48.541	-1.979	54.000	3.480	AV
2		5150.000	51.473	47.991	-2.527	54.000	3.482	AV
3		5197.375	97.408	94.519	N/A	N/A	2.890	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290 MHz	

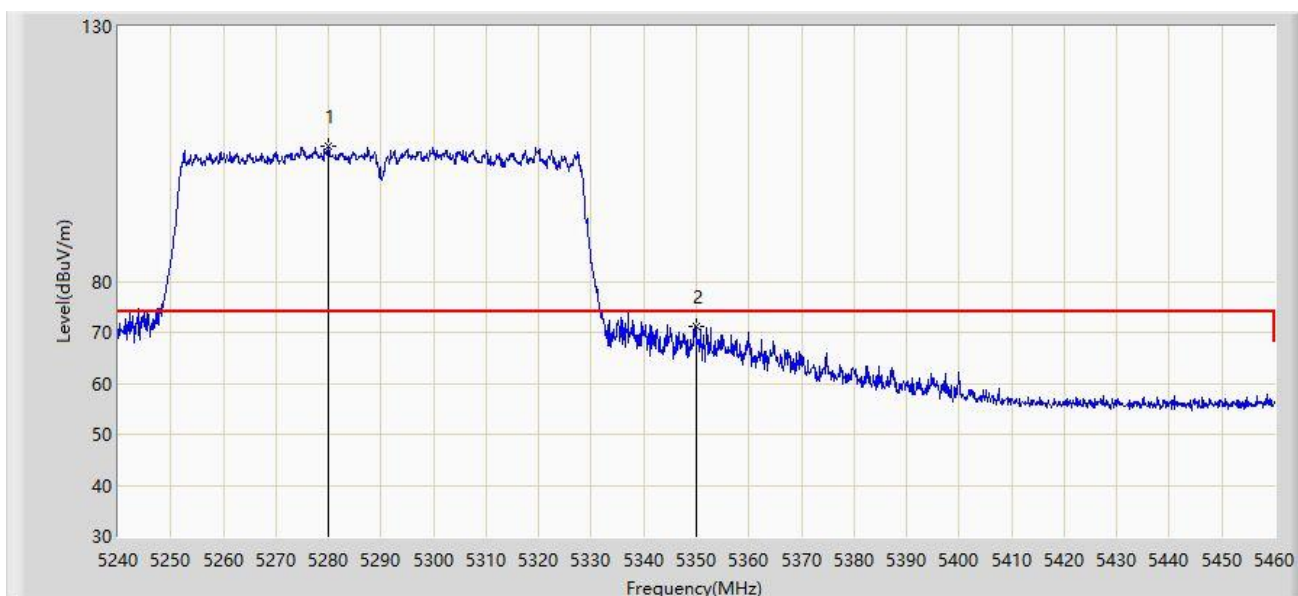


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5279.930	106.636	104.089	N/A	N/A	2.547	PK
2	*	5350.000	71.189	68.369	-2.811	74.000	2.820	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290 MHz	

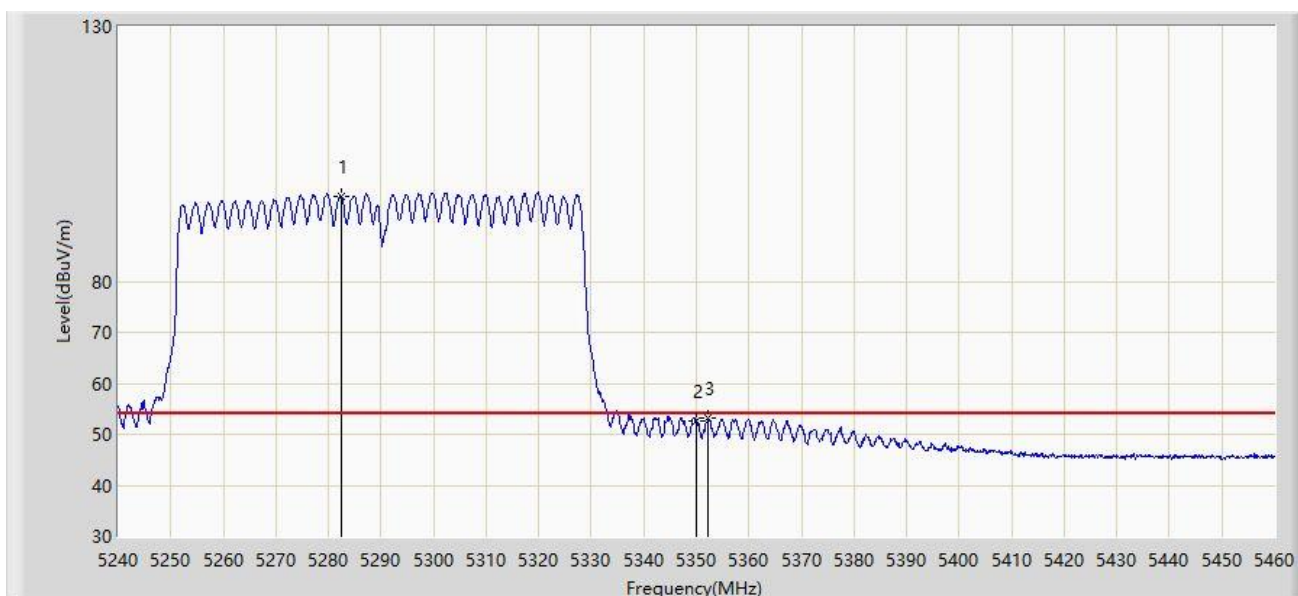


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5282.350	96.647	94.118	N/A	N/A	2.529	AV
2		5350.000	52.738	49.918	-1.262	54.000	2.820	AV
3	*	5352.310	53.131	50.343	-0.869	54.000	2.787	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290 MHz	

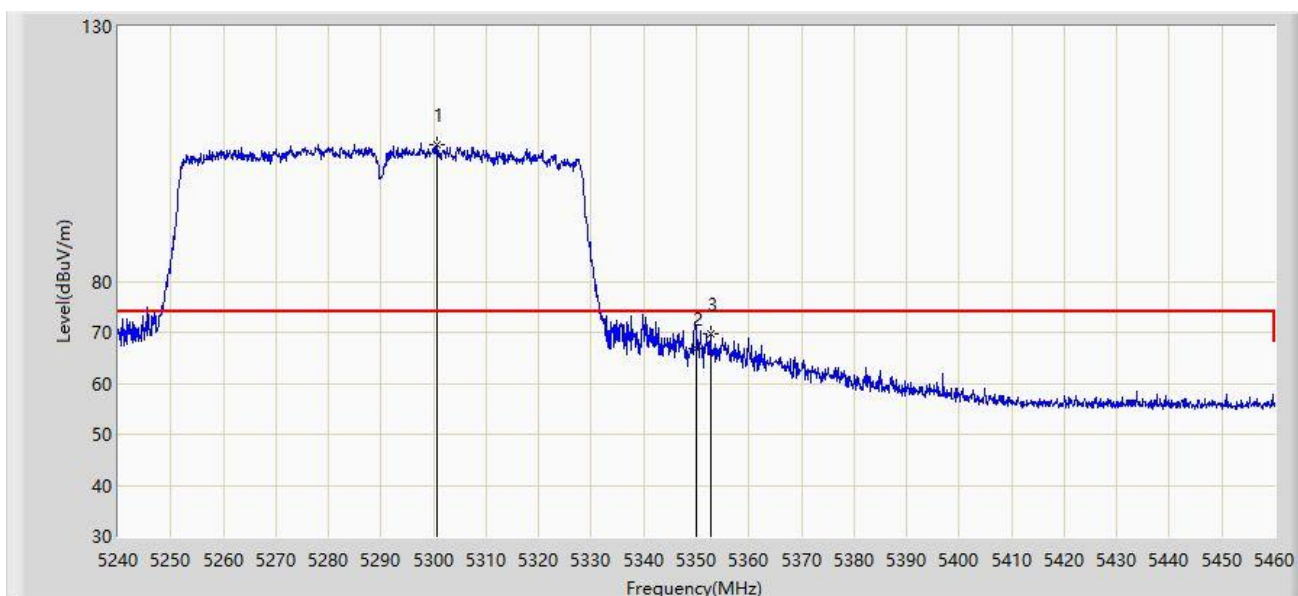


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5300.720	106.880	104.147	N/A	N/A	2.733	PK
2		5350.000	66.829	64.009	-7.171	74.000	2.820	PK
3	*	5352.750	69.586	66.796	-4.414	74.000	2.789	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290 MHz	

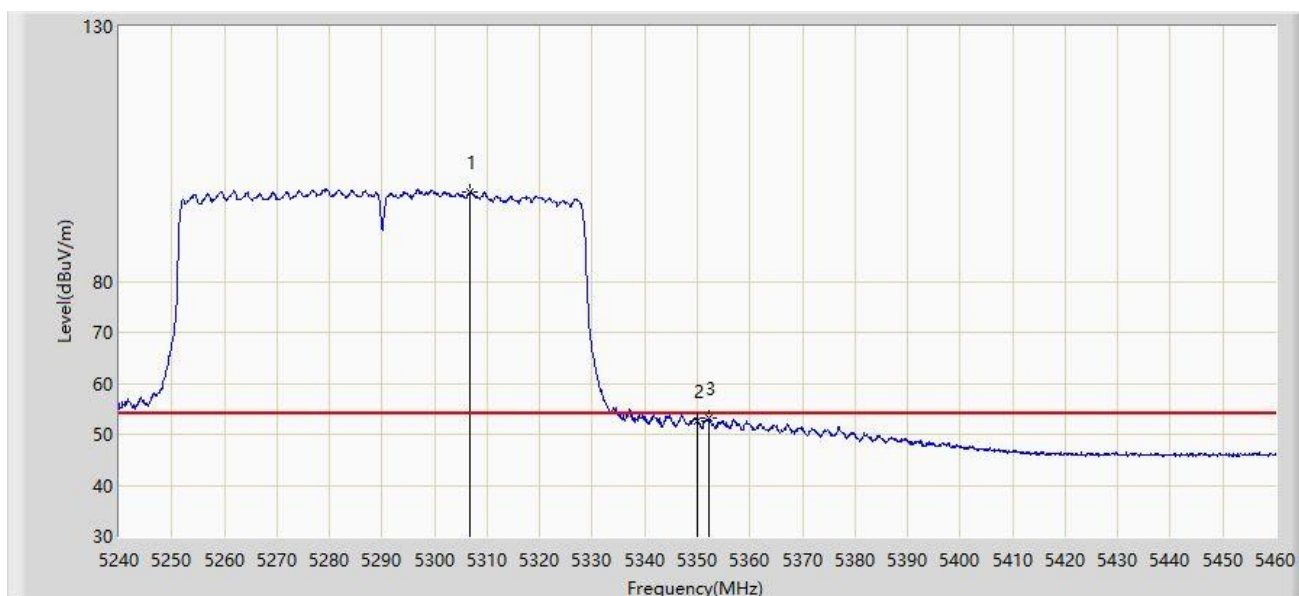


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5306.770	97.548	94.722	N/A	N/A	2.826	AV
2		5350.000	52.596	49.776	-1.404	54.000	2.820	AV
3	*	5352.200	53.110	50.323	-0.890	54.000	2.787	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250 MHz	

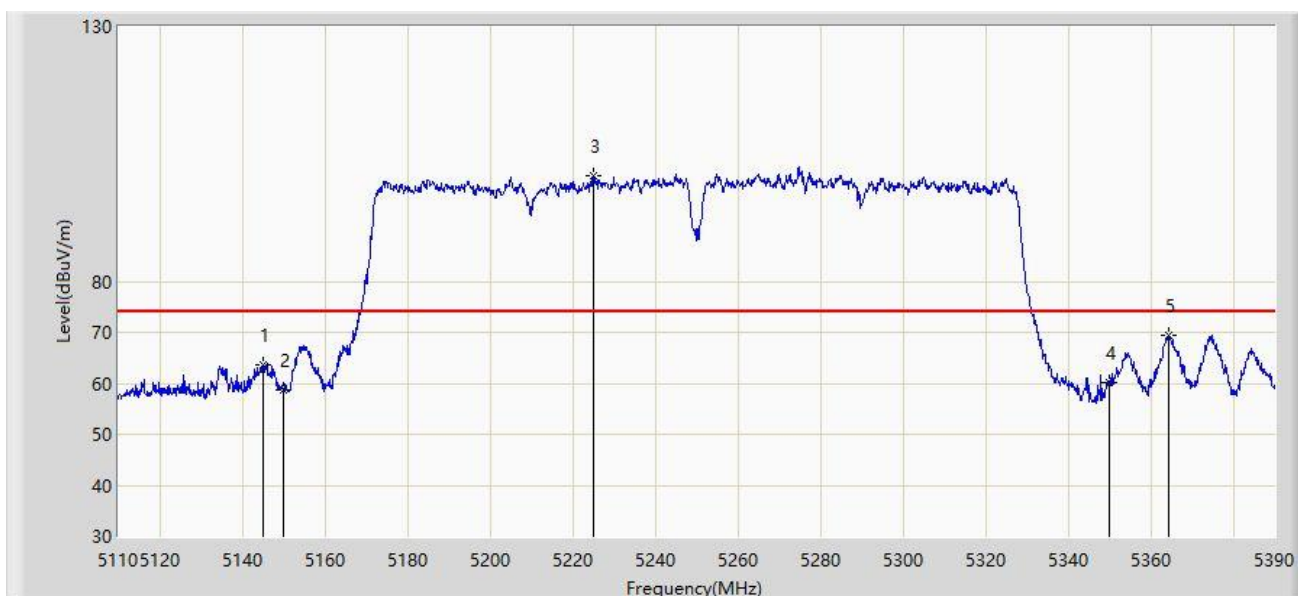


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5145.000	63.741	60.303	-10.259	74.000	3.437	PK
2		5150.000	58.828	55.346	-15.172	74.000	3.482	PK
3		5225.080	100.730	97.658	N/A	N/A	3.072	PK
4		5350.000	60.272	57.452	-13.728	74.000	2.820	PK
5	*	5364.520	69.380	66.538	-4.620	74.000	2.842	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250 MHz	

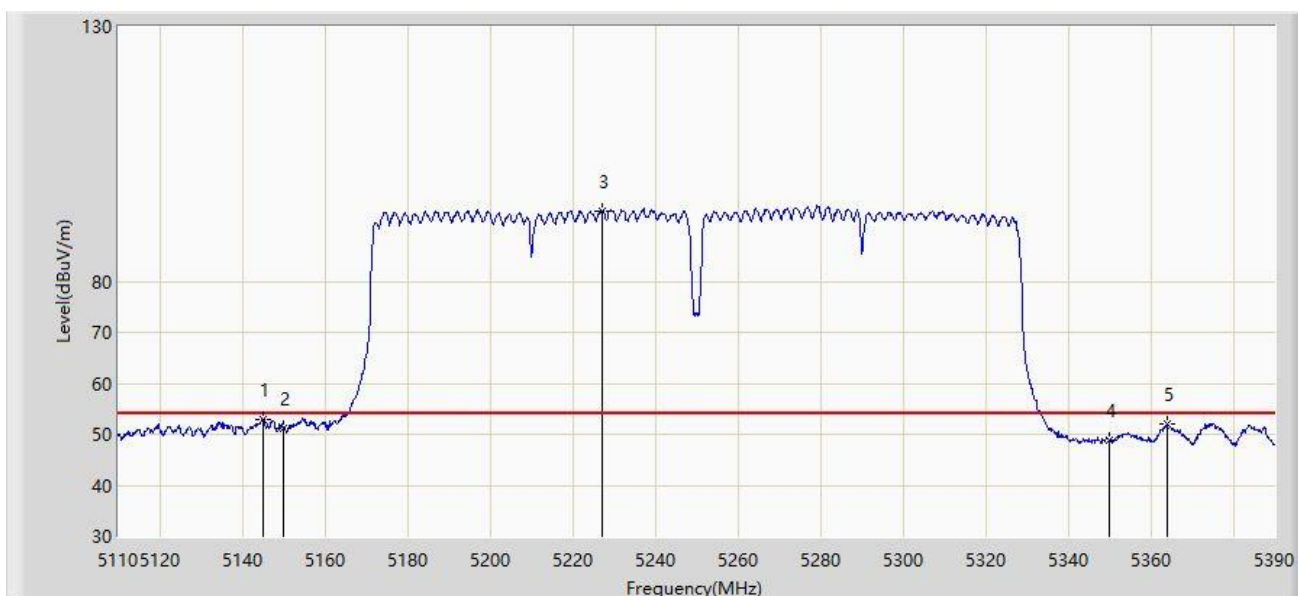


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.140	52.941	49.502	-1.059	54.000	3.439	AV
2		5150.000	51.247	47.765	-2.753	54.000	3.482	AV
3		5227.040	93.834	90.722	N/A	N/A	3.111	AV
4		5350.000	48.719	45.899	-5.281	54.000	2.820	AV
5		5363.960	51.887	49.047	-2.113	54.000	2.839	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250 MHz	

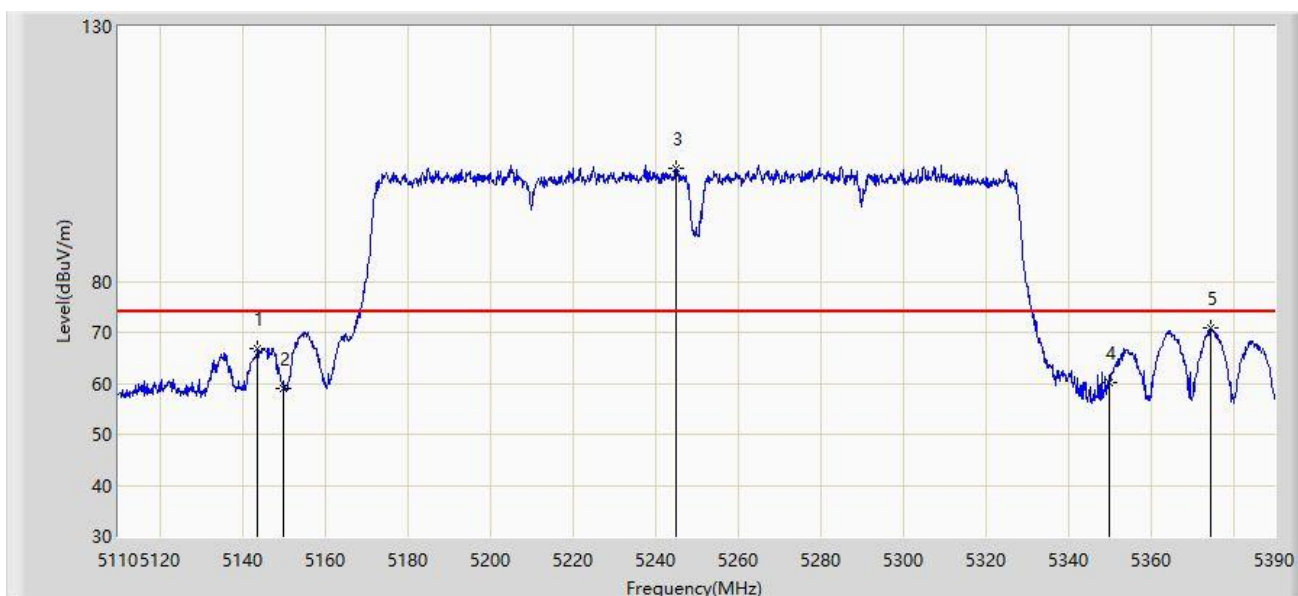


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5143.740	66.938	63.516	-7.062	74.000	3.422	PK
2		5150.000	59.111	55.629	-14.889	74.000	3.482	PK
3		5245.240	102.242	99.045	N/A	N/A	3.196	PK
4		5350.000	60.228	57.408	-13.772	74.000	2.820	PK
5	*	5374.600	70.852	67.882	-3.148	74.000	2.970	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250 MHz	

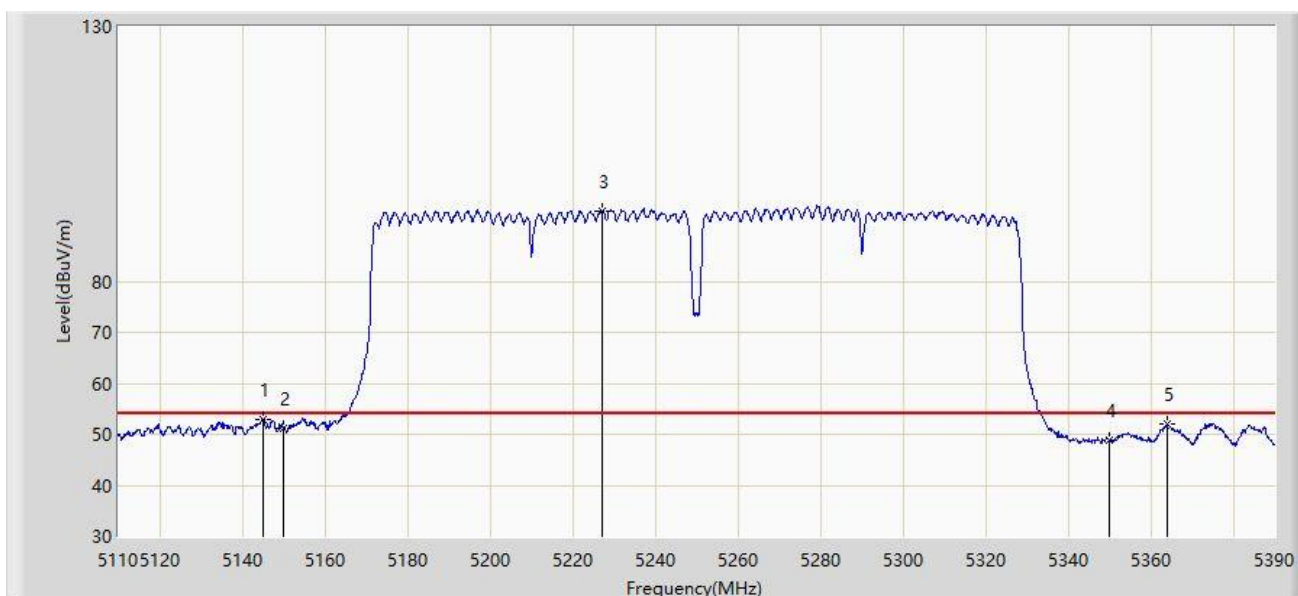


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.140	52.941	49.502	-1.059	54.000	3.439	AV
2		5150.000	51.247	47.765	-2.753	54.000	3.482	AV
3		5227.040	93.834	90.722	N/A	N/A	3.111	AV
4		5350.000	48.719	45.899	-5.281	54.000	2.820	AV
5		5363.960	51.887	49.047	-2.113	54.000	2.839	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180 MHz	

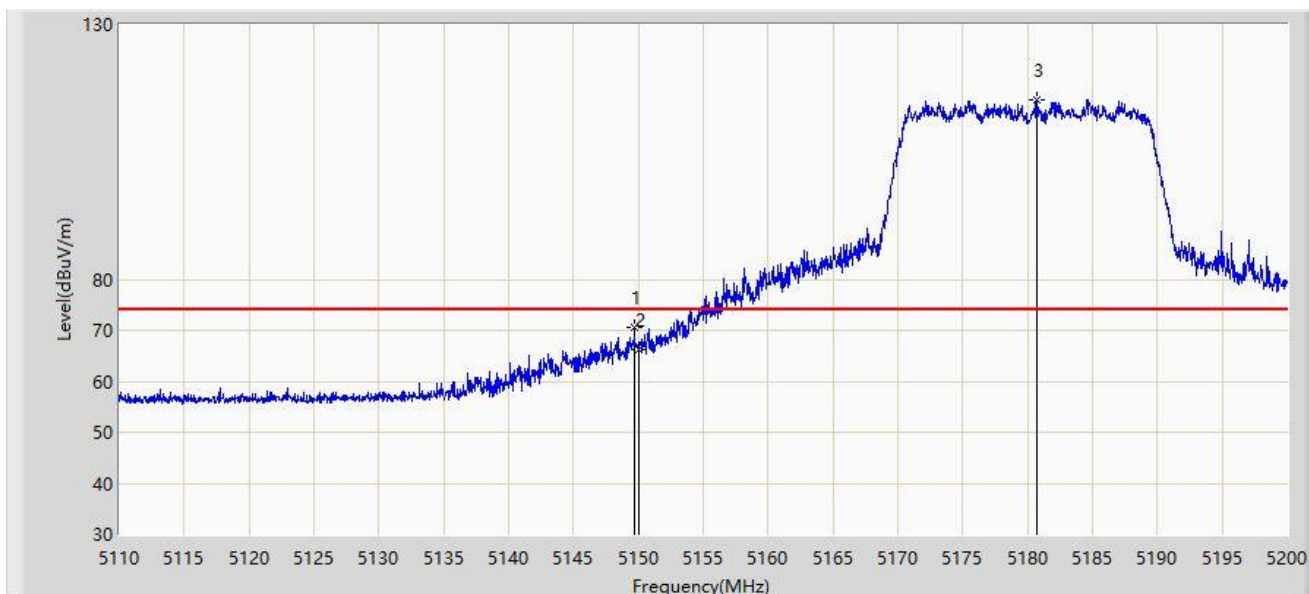


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.690	70.439	66.958	-3.561	74.000	3.482	PK
2		5150.000	66.113	62.631	-7.887	74.000	3.482	PK
3		5180.695	115.196	111.940	N/A	N/A	3.255	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180 MHz	

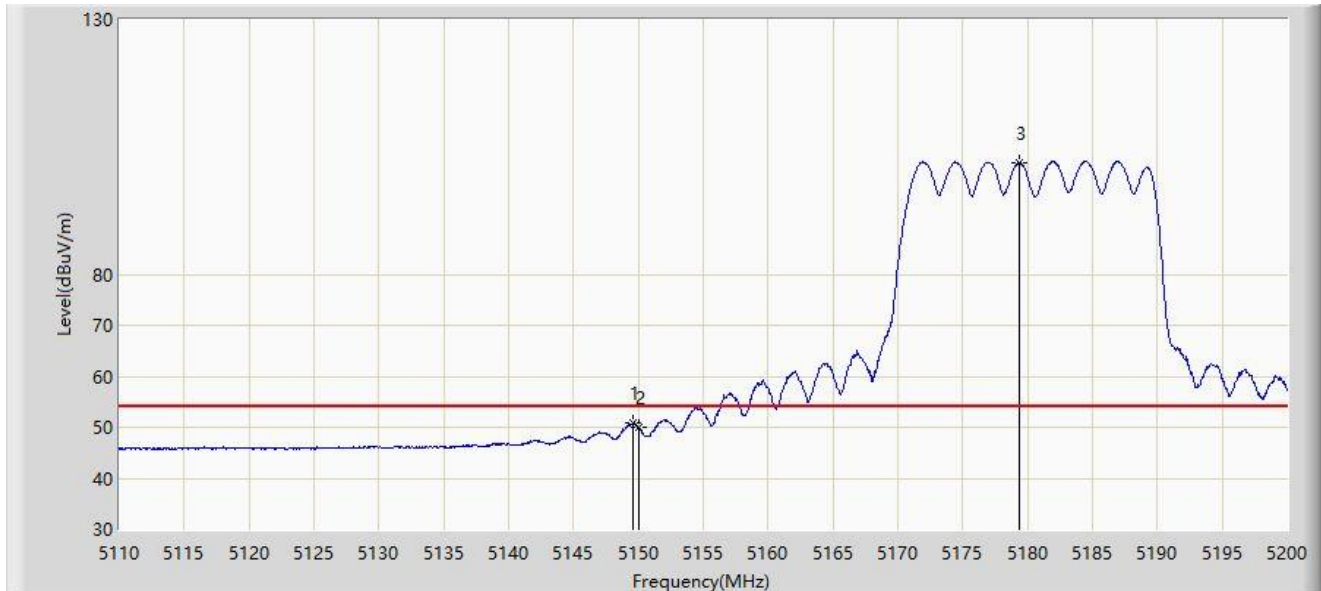


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.600	50.928	47.448	-3.072	54.000	3.480	AV
2		5150.000	49.940	46.458	-4.060	54.000	3.482	AV
3		5179.390	101.949	98.667	N/A	N/A	3.282	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180 MHz	

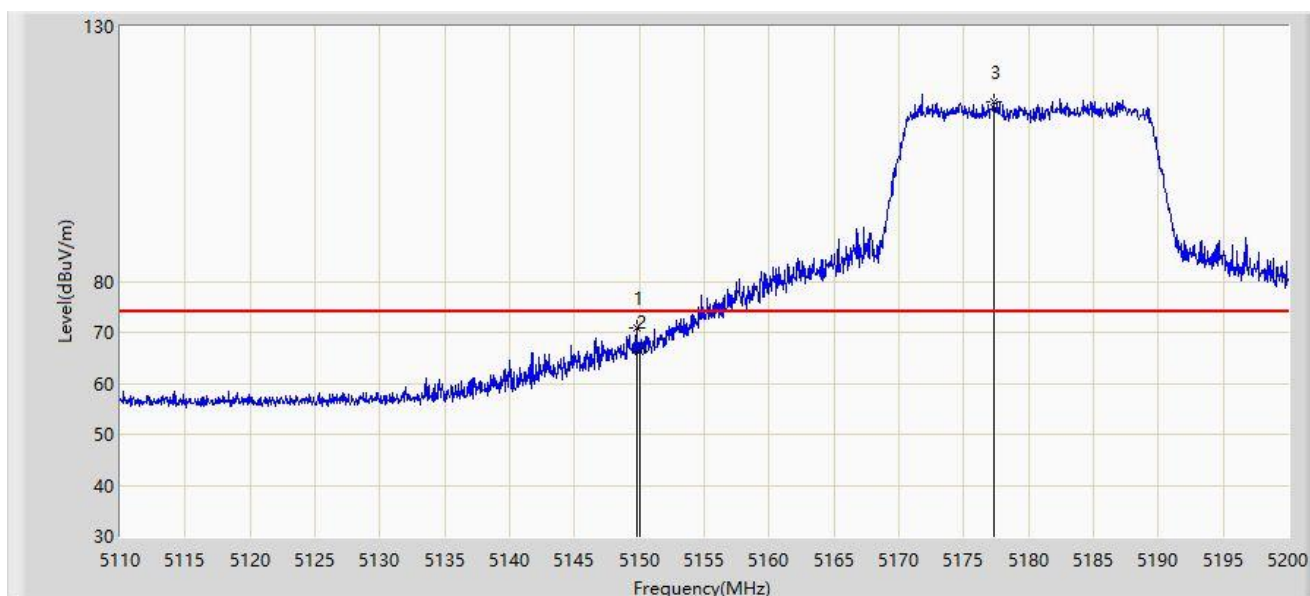


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.780	70.768	67.287	-3.232	74.000	3.481	PK
2		5150.000	66.271	62.789	-7.729	74.000	3.482	PK
3		5177.275	115.256	111.932	N/A	N/A	3.324	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180 MHz	

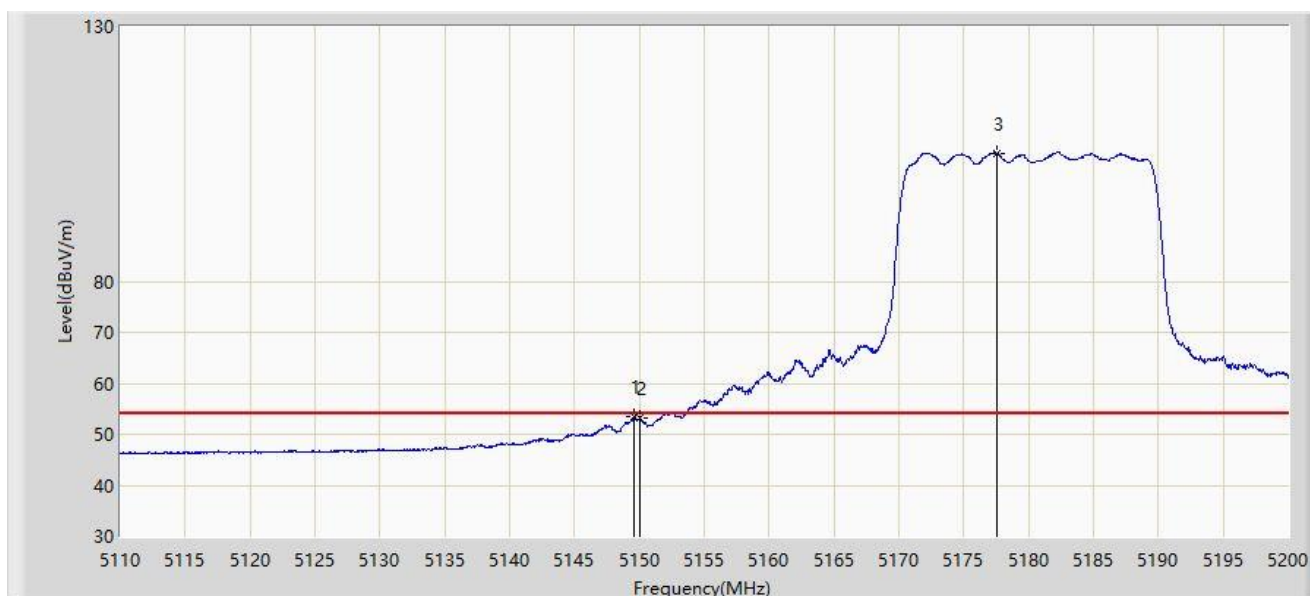


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.555	53.412	49.932	-0.588	54.000	3.480	AV
2		5150.000	53.070	49.588	-0.930	54.000	3.482	AV
3		5177.545	105.064	101.745	N/A	N/A	3.319	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320 MHz	

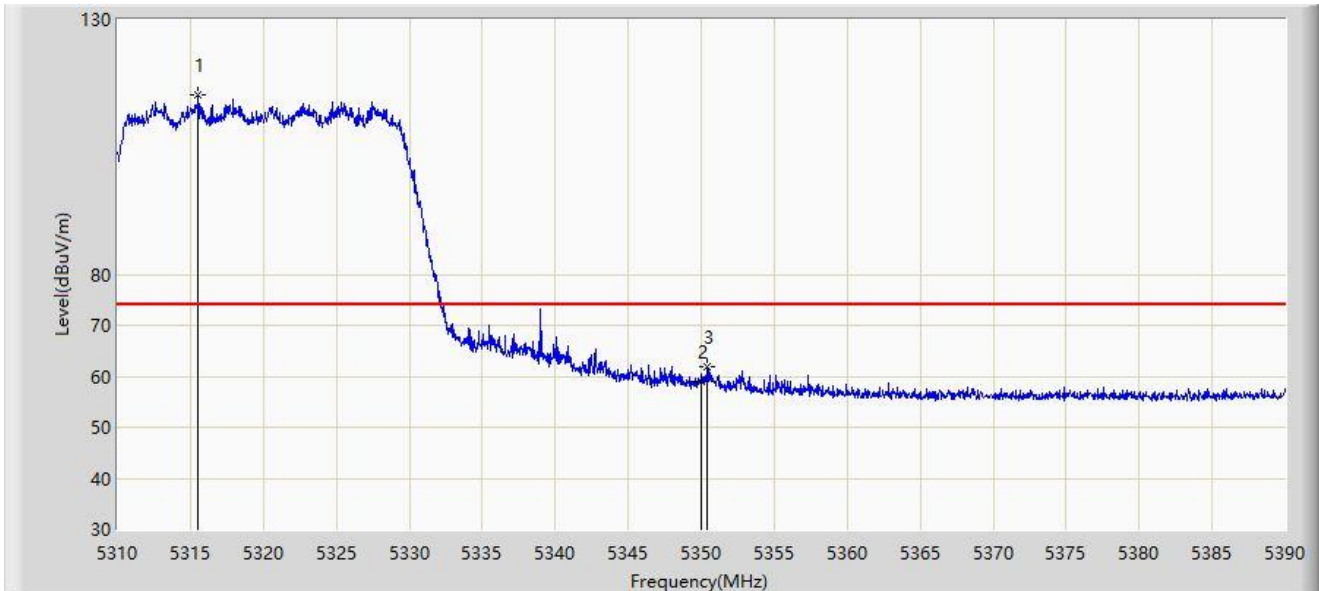


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5315.520	115.080	112.113	N/A	N/A	2.966	PK
2		5350.000	59.012	56.192	-14.988	74.000	2.820	PK
3	*	5350.440	61.858	59.046	-12.142	74.000	2.813	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320 MHz	

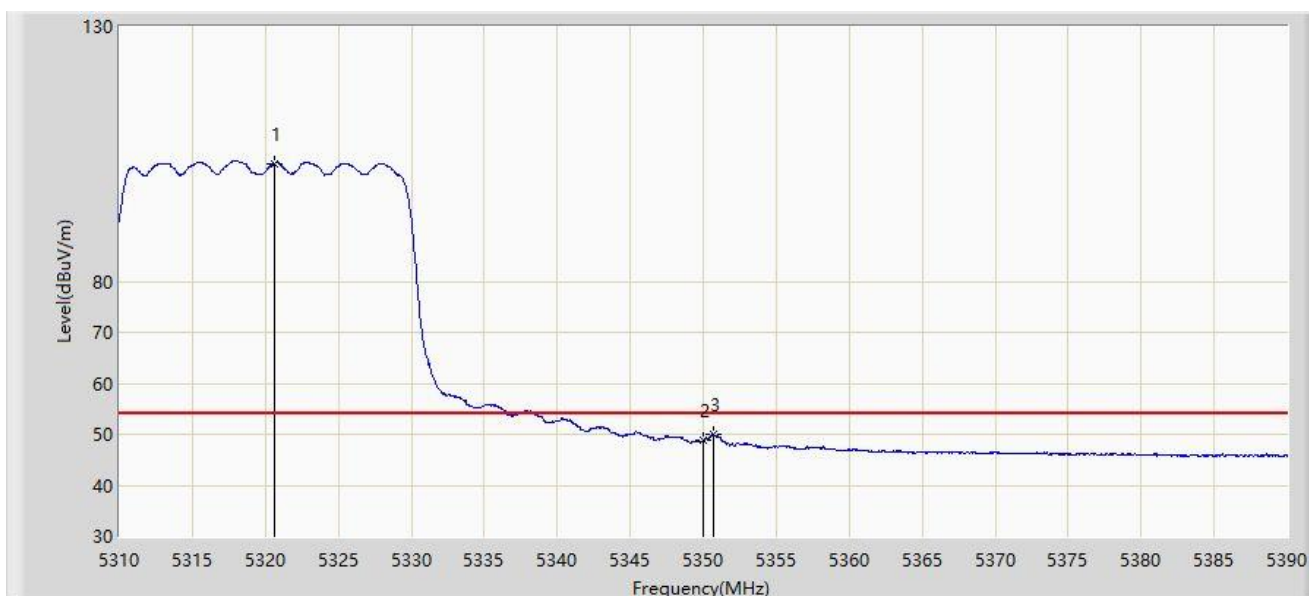


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.640	103.170	100.164	N/A	N/A	3.006	AV
2		5350.000	48.720	45.900	-5.280	54.000	2.820	AV
3	*	5350.680	50.033	47.225	-3.967	54.000	2.809	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320 MHz	

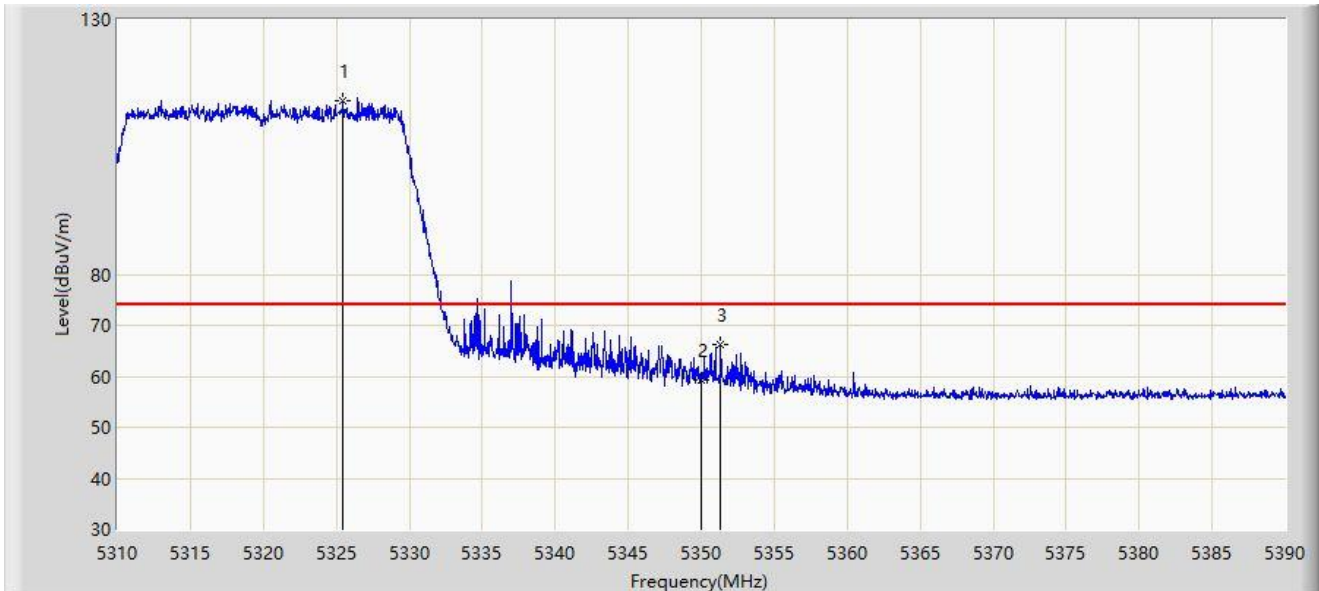


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5325.480	114.114	111.116	N/A	N/A	2.999	PK
2		5350.000	59.258	56.438	-14.742	74.000	2.820	PK
3	*	5351.320	66.335	63.537	-7.665	74.000	2.798	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320 MHz	

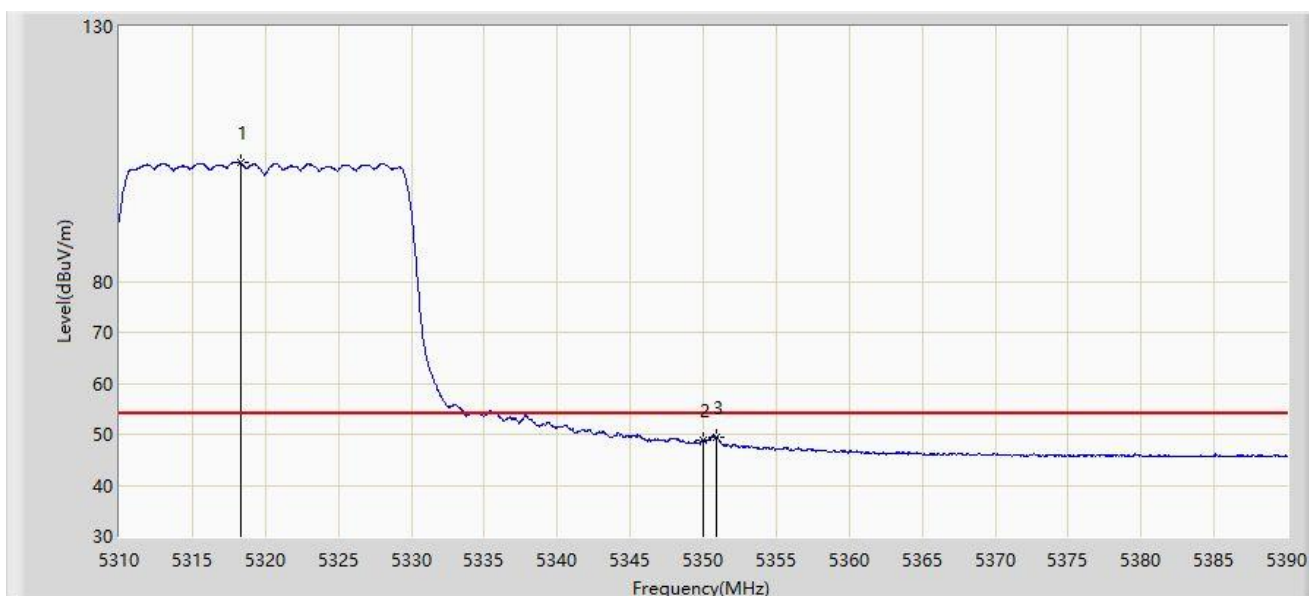


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.280	103.273	100.263	N/A	N/A	3.010	AV
2		5350.000	48.754	45.934	-5.246	54.000	2.820	AV
3	*	5350.880	49.552	46.747	-4.448	54.000	2.804	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190 MHz	

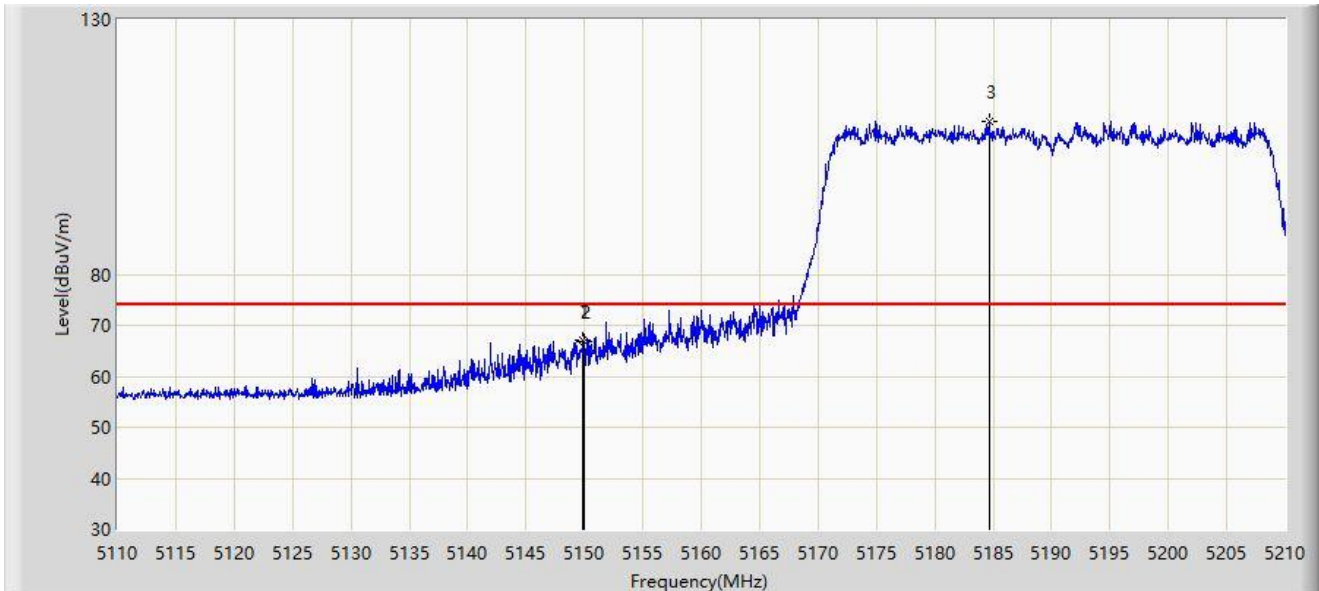


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.900	67.000	63.519	-7.000	74.000	3.482	PK
2		5150.000	66.749	63.267	-7.251	74.000	3.482	PK
3		5184.650	110.095	106.926	N/A	N/A	3.169	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190 MHz	

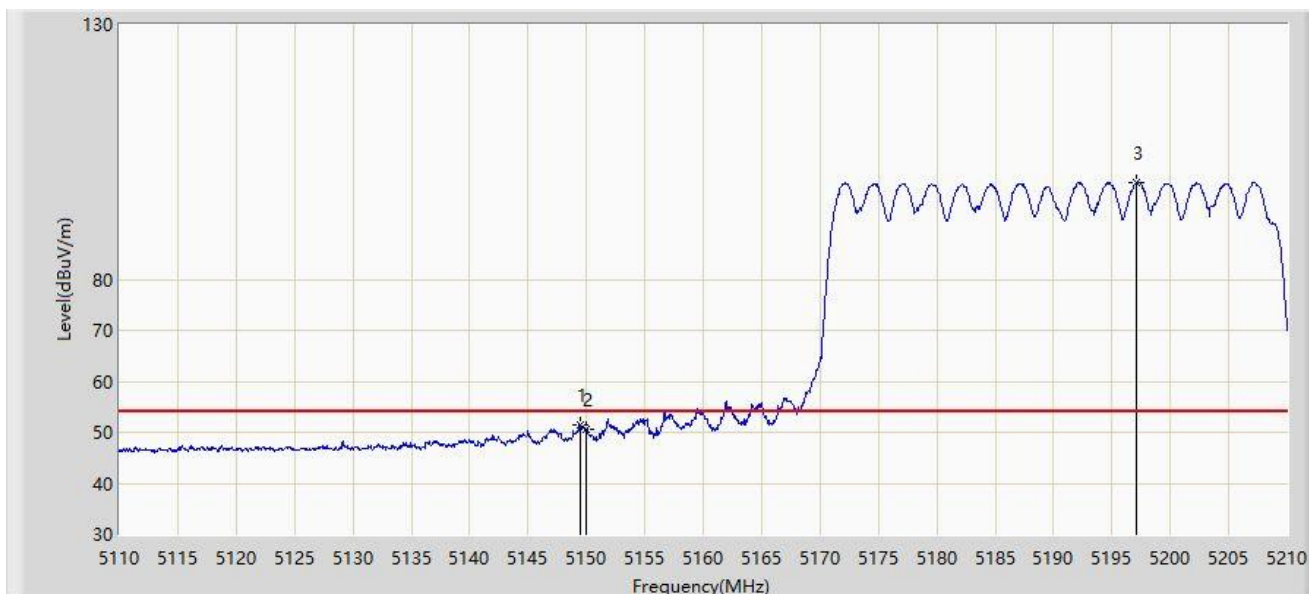


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.450	51.366	47.886	-2.634	54.000	3.479	AV
2		5150.000	50.466	46.984	-3.534	54.000	3.482	AV
3		5197.100	99.125	96.230	N/A	N/A	2.895	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190 MHz	

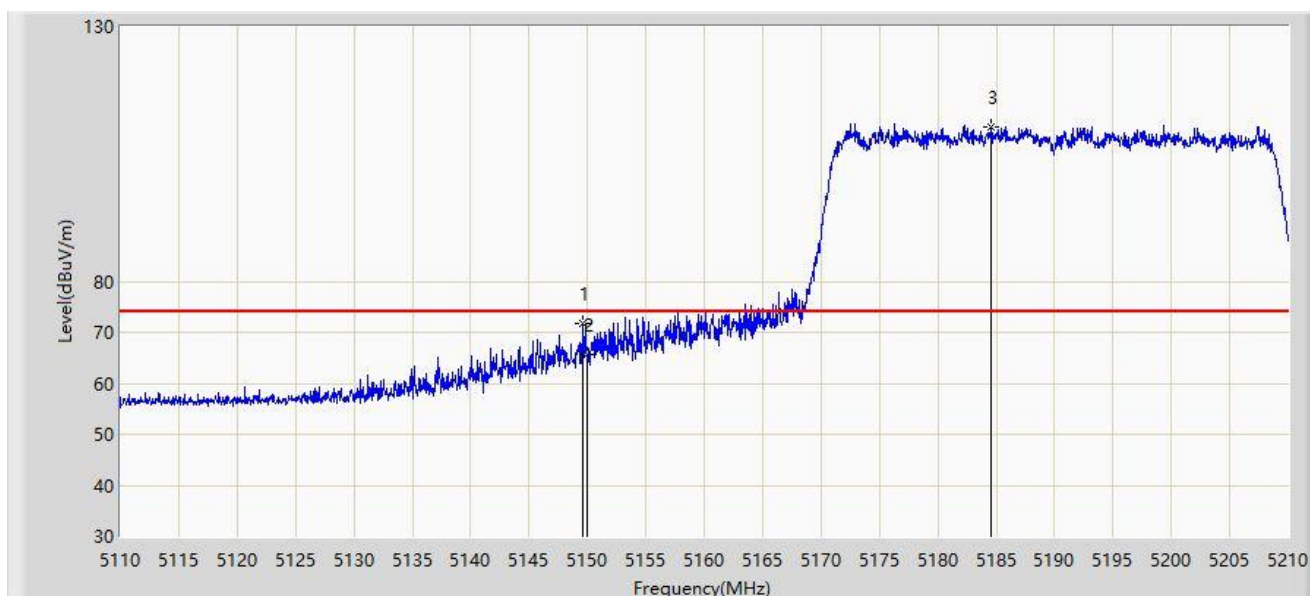


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.550	71.850	68.370	-2.150	74.000	3.480	PK
2		5150.000	65.605	62.123	-8.395	74.000	3.482	PK
3		5184.600	110.413	107.243	N/A	N/A	3.169	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190 MHz	

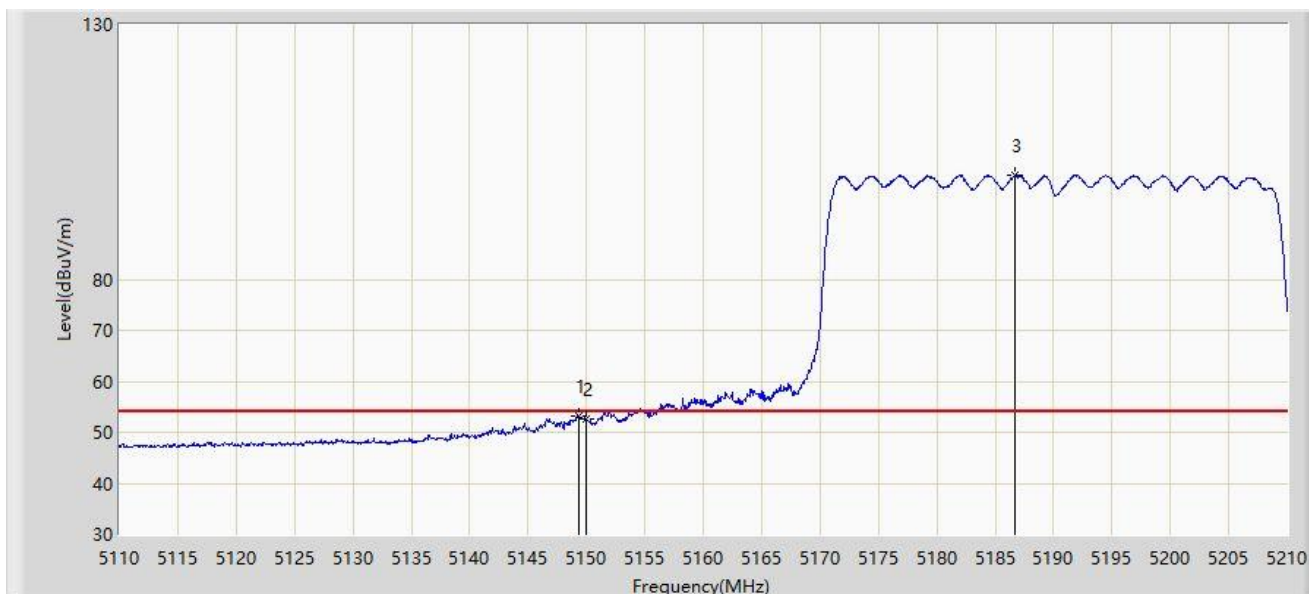


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.350	53.113	49.633	-0.887	54.000	3.480	AV
2		5150.000	52.602	49.120	-1.398	54.000	3.482	AV
3		5186.750	100.462	97.342	N/A	N/A	3.120	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310 MHz	

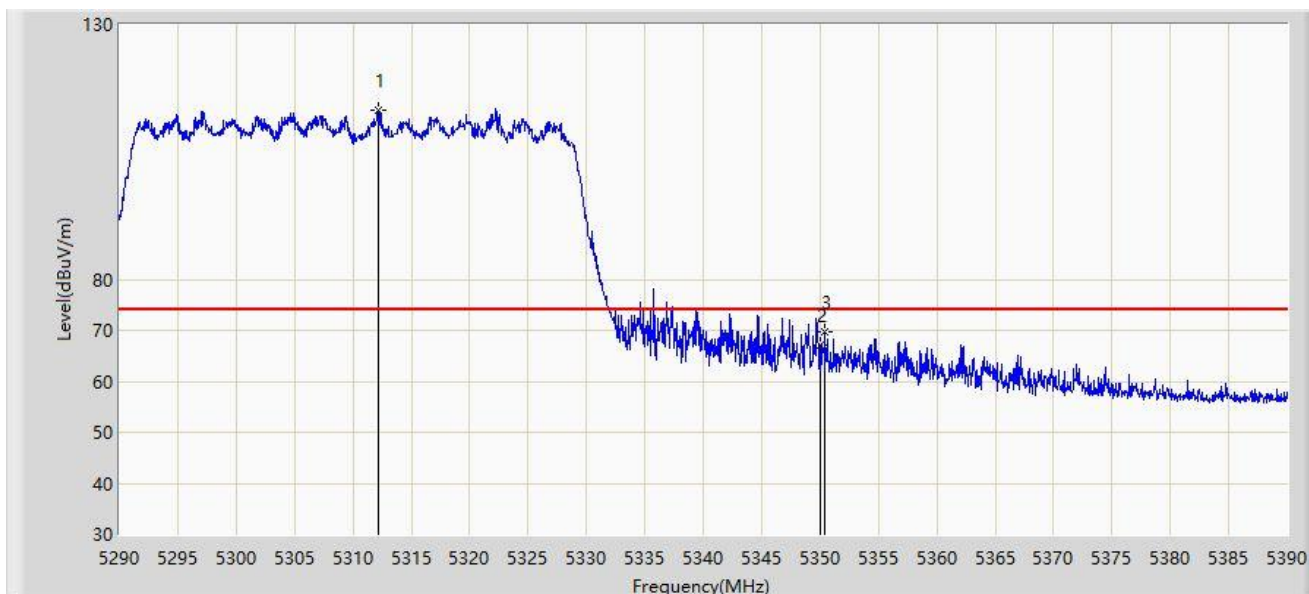


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.150	113.103	110.193	N/A	N/A	2.910	PK
2		5350.000	67.027	64.207	-6.973	74.000	2.820	PK
3	*	5350.450	69.659	66.847	-4.341	74.000	2.813	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310 MHz	

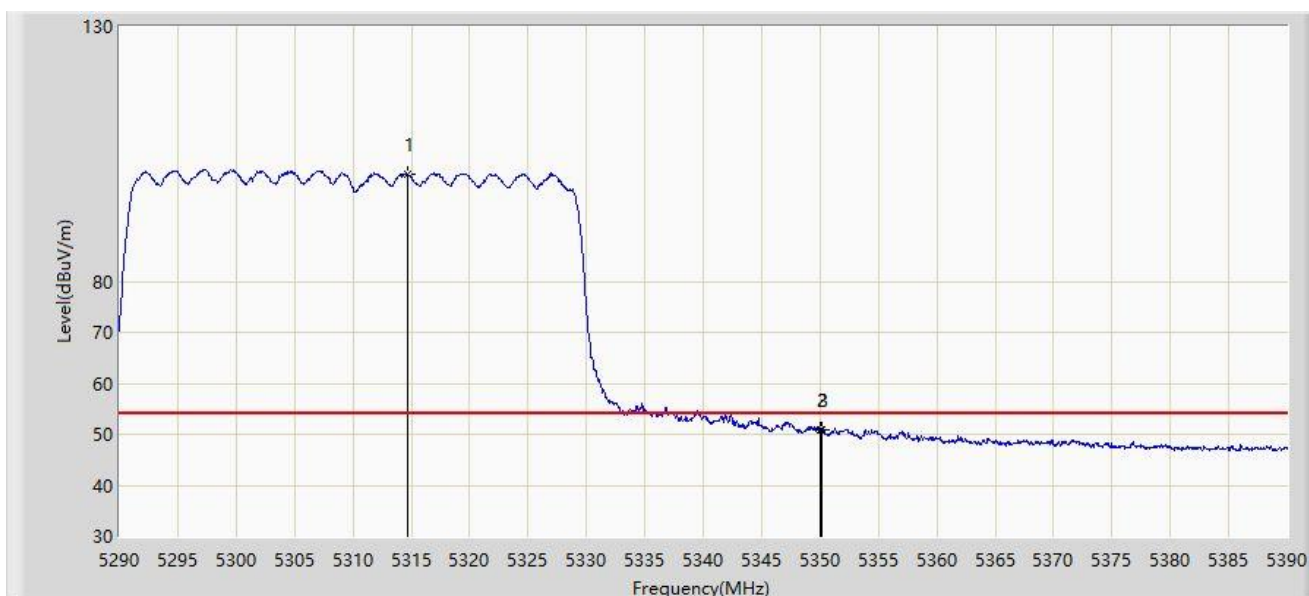


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5314.700	100.976	98.024	N/A	N/A	2.952	AV
2		5350.000	50.785	47.965	-3.215	54.000	2.820	AV
3	*	5350.200	50.945	48.129	-3.055	54.000	2.816	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310 MHz	

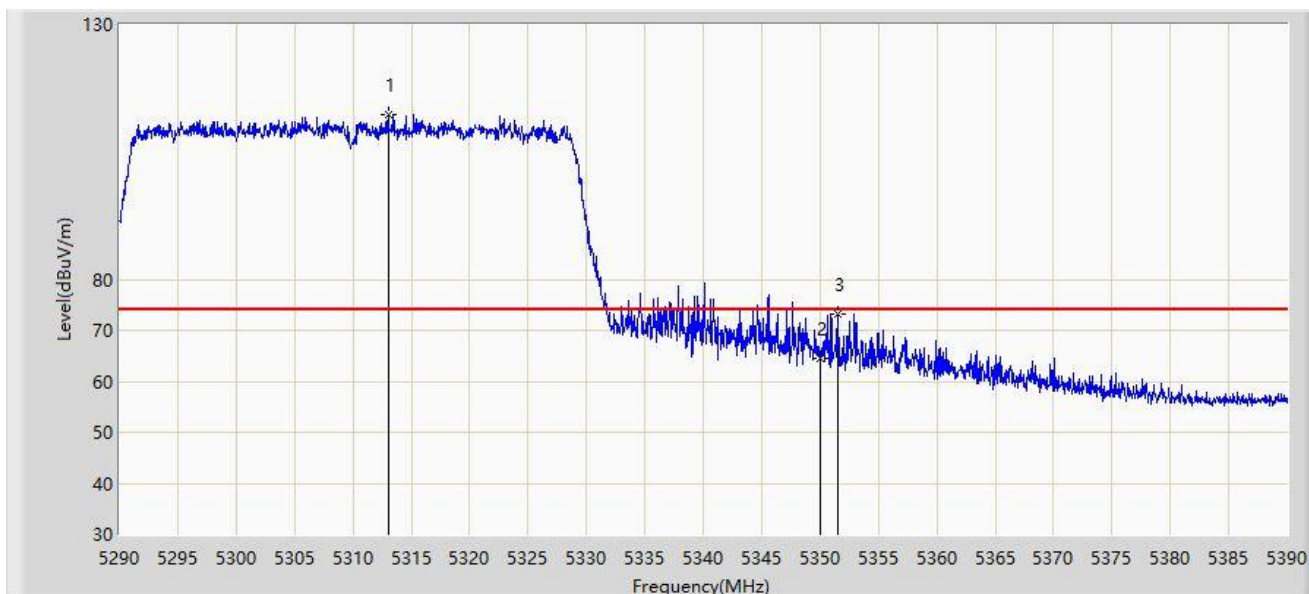


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5313.000	112.393	109.470	N/A	N/A	2.923	PK
2		5350.000	64.515	61.695	-9.485	74.000	2.820	PK
3	*	5351.550	73.274	70.480	-0.726	74.000	2.794	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310 MHz	

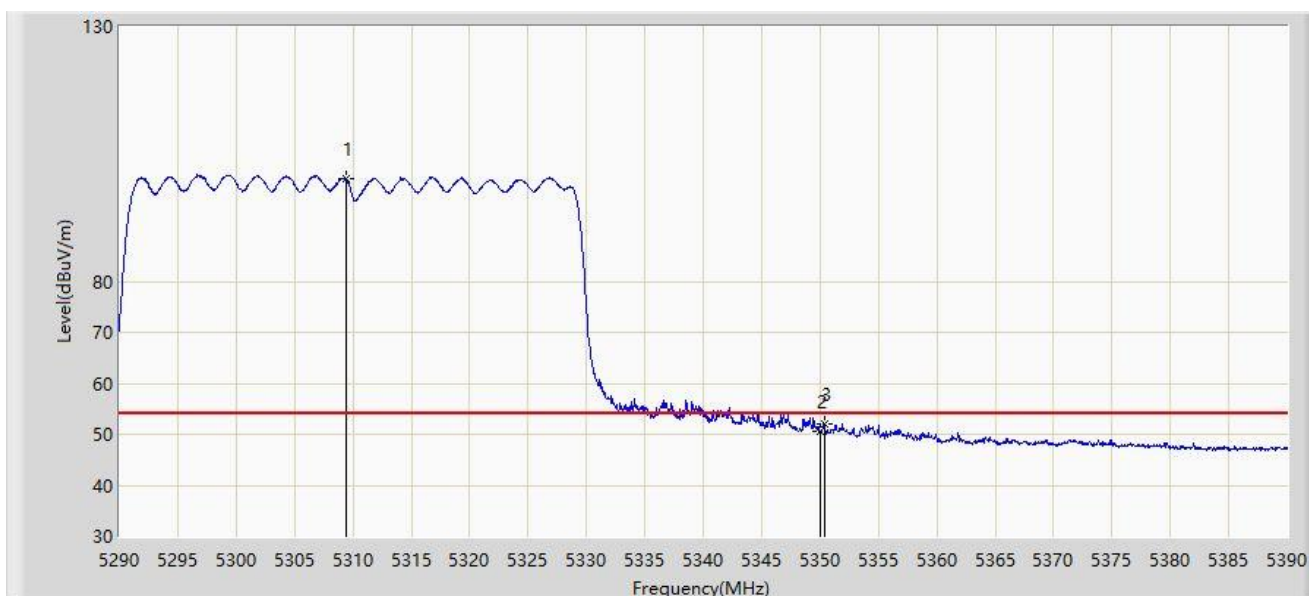


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5309.400	100.121	97.254	N/A	N/A	2.867	AV
2		5350.000	50.679	47.859	-3.321	54.000	2.820	AV
3	*	5350.350	52.148	49.334	-1.852	54.000	2.814	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210 MHz	

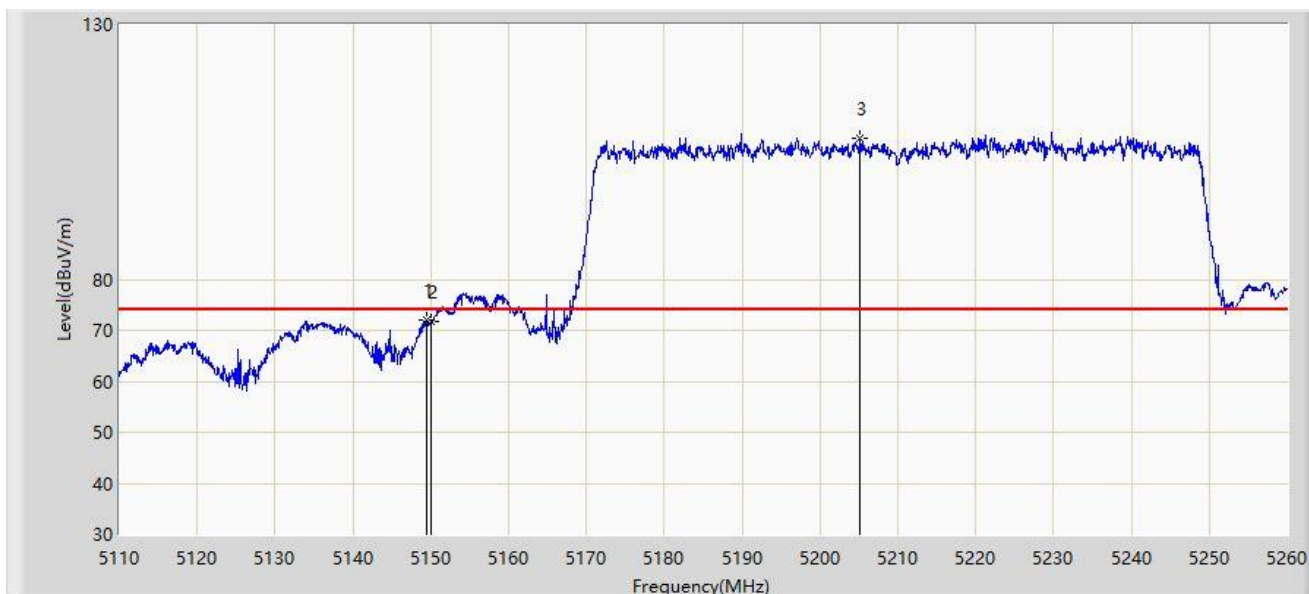


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.450	72.093	68.613	-1.907	74.000	3.479	PK
2		5150.000	71.625	68.143	-2.375	74.000	3.482	PK
3		5205.100	107.751	104.873	N/A	N/A	2.878	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210 MHz	

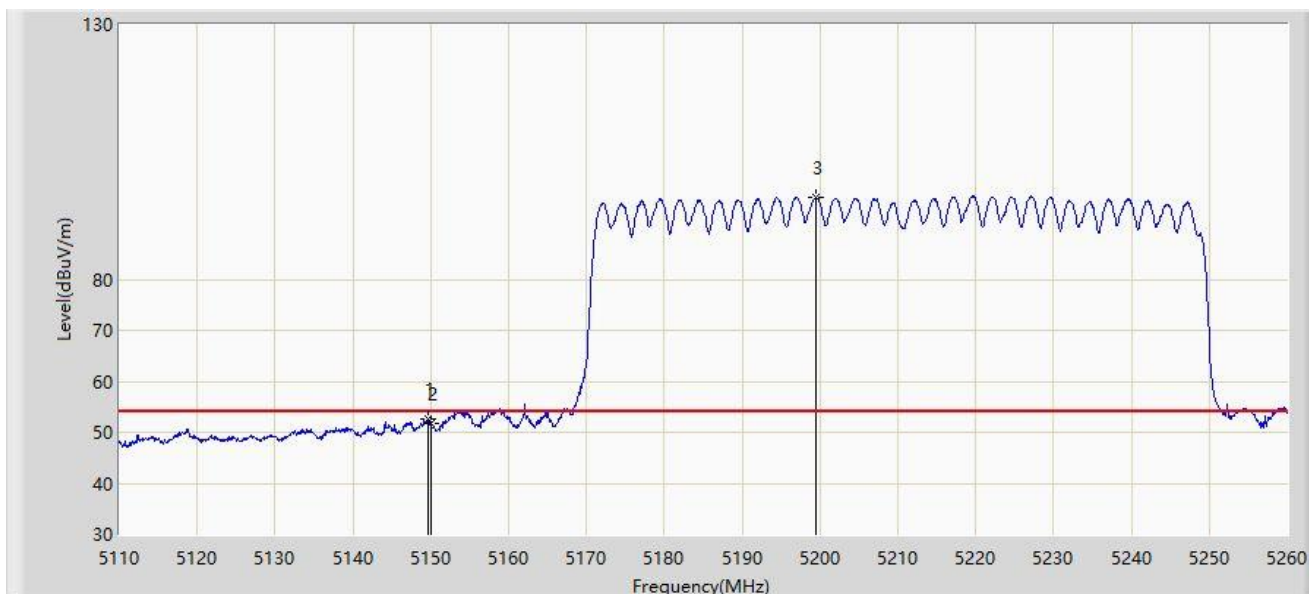


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.675	52.609	49.128	-1.391	54.000	3.481	AV
2		5150.000	51.776	48.294	-2.224	54.000	3.482	AV
3		5199.475	96.112	93.256	N/A	N/A	2.856	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210 MHz	

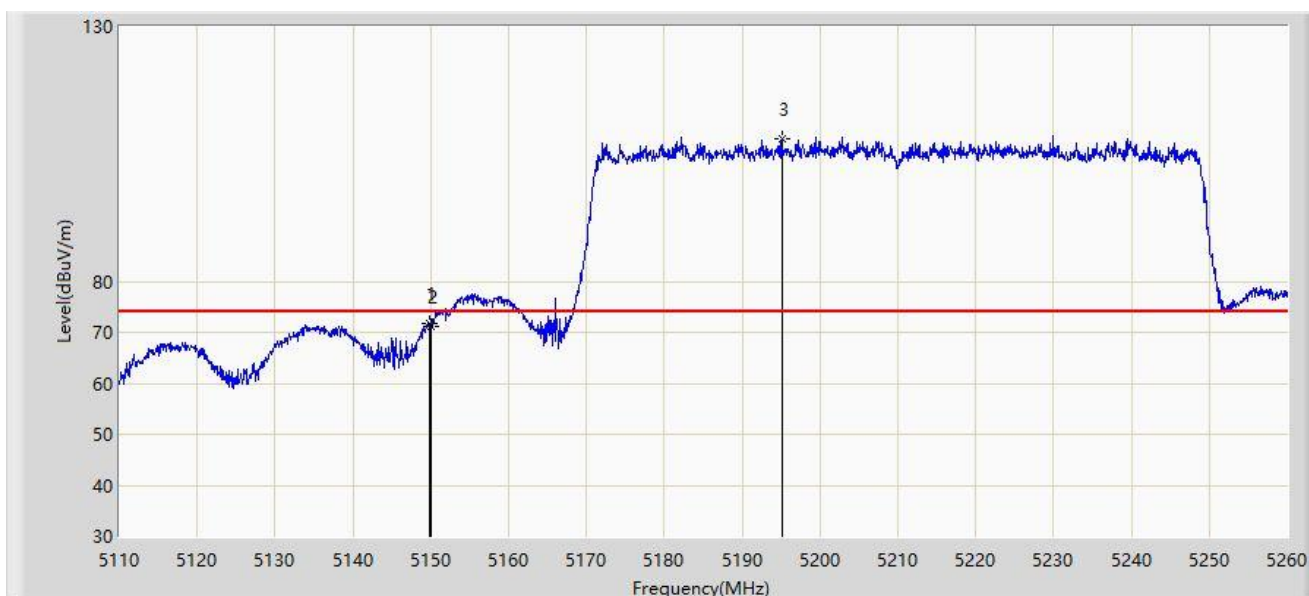


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.900	71.713	68.232	-2.287	74.000	3.482	PK
2		5150.000	71.074	67.592	-2.926	74.000	3.482	PK
3		5195.125	107.935	104.997	N/A	N/A	2.937	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210 MHz	

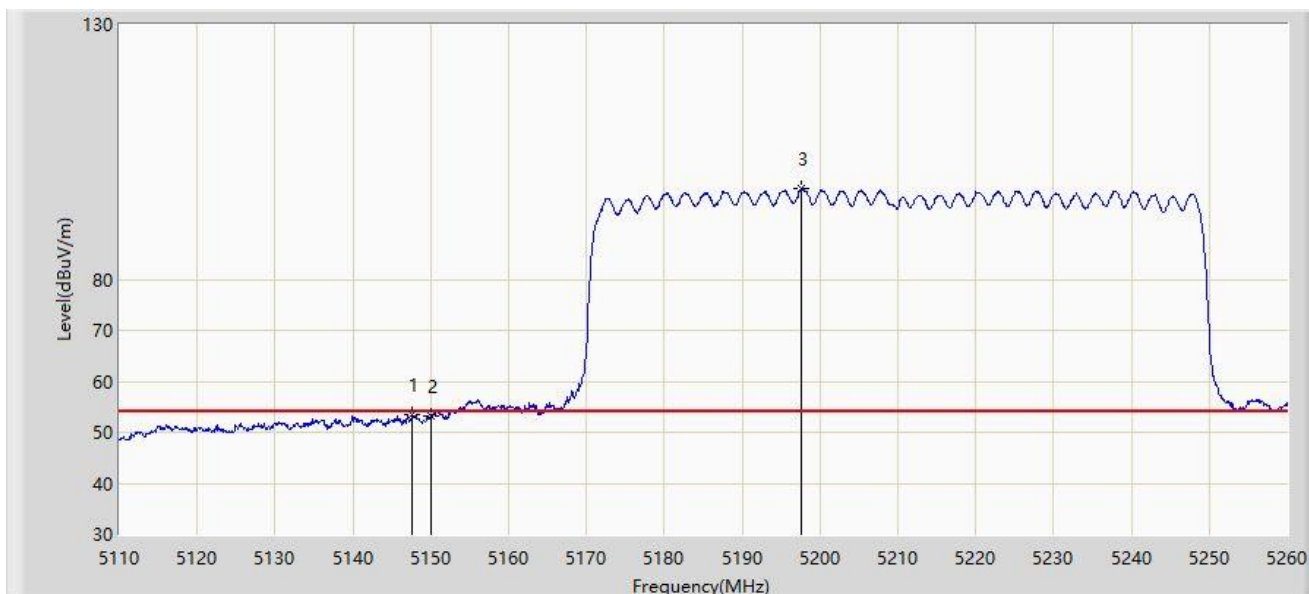


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.575	53.433	49.963	-0.567	54.000	3.471	AV
2		5150.000	53.277	49.795	-0.723	54.000	3.482	AV
3		5197.675	97.719	94.836	N/A	N/A	2.883	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290 MHz	

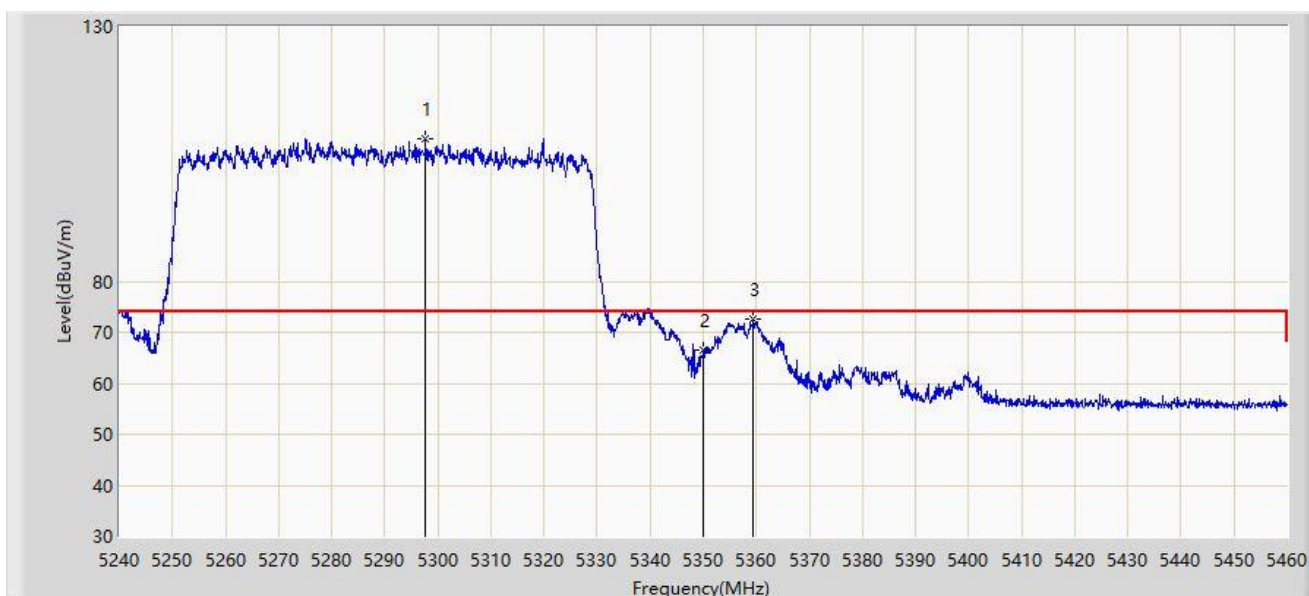


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5297.750	107.931	105.230	N/A	N/A	2.701	PK
2		5350.000	66.529	63.709	-7.471	74.000	2.820	PK
3	*	5359.350	72.568	69.749	-1.432	74.000	2.819	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290 MHz	

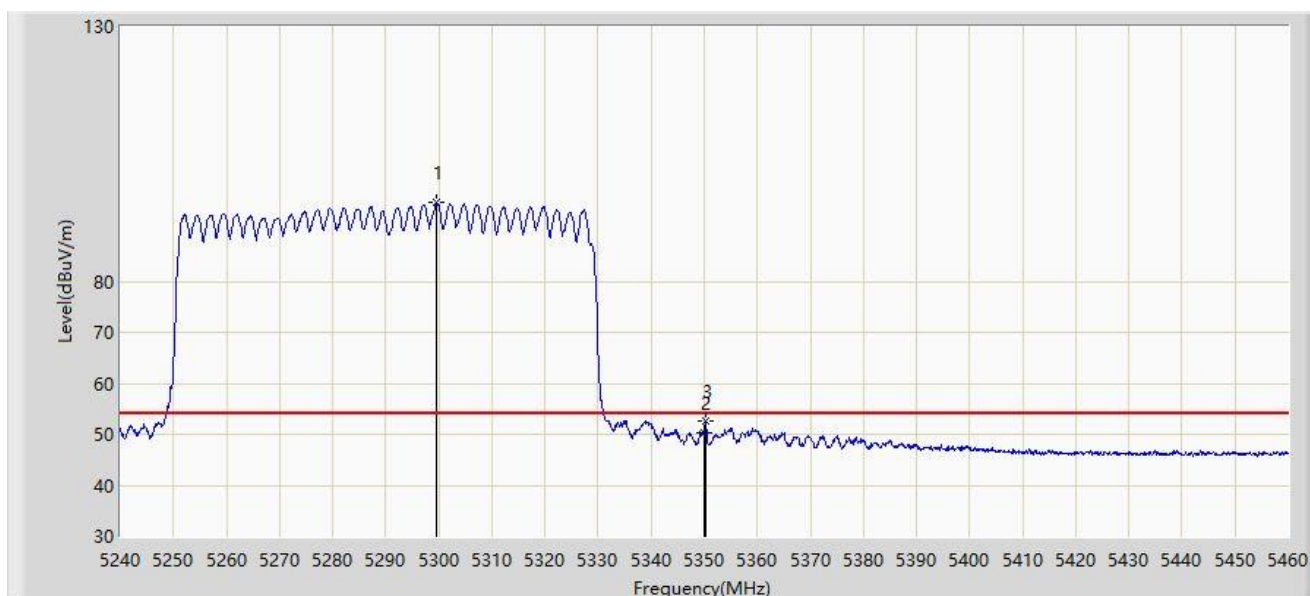


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5299.510	95.477	92.757	N/A	N/A	2.720	AV
2		5350.000	50.433	47.613	-3.567	54.000	2.820	AV
3	*	5350.220	52.741	49.925	-1.259	54.000	2.816	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290 MHz	

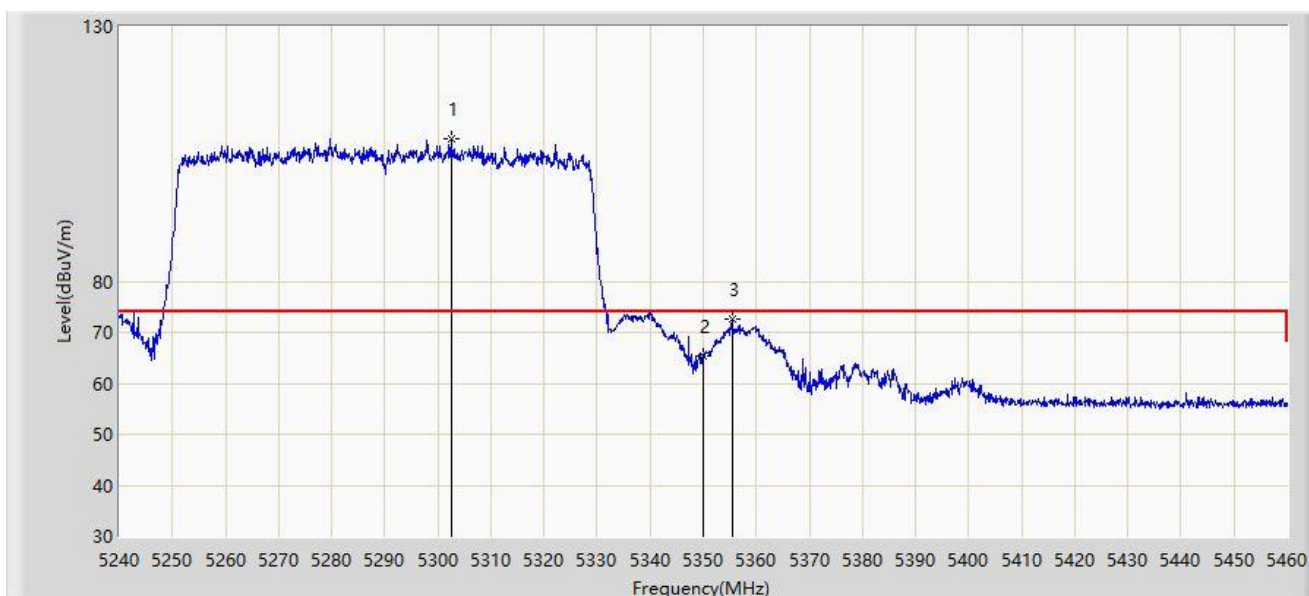


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5302.480	108.039	105.280	N/A	N/A	2.760	PK
2		5350.000	65.265	62.445	-8.735	74.000	2.820	PK
3	*	5355.500	72.531	69.729	-1.469	74.000	2.802	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290 MHz	

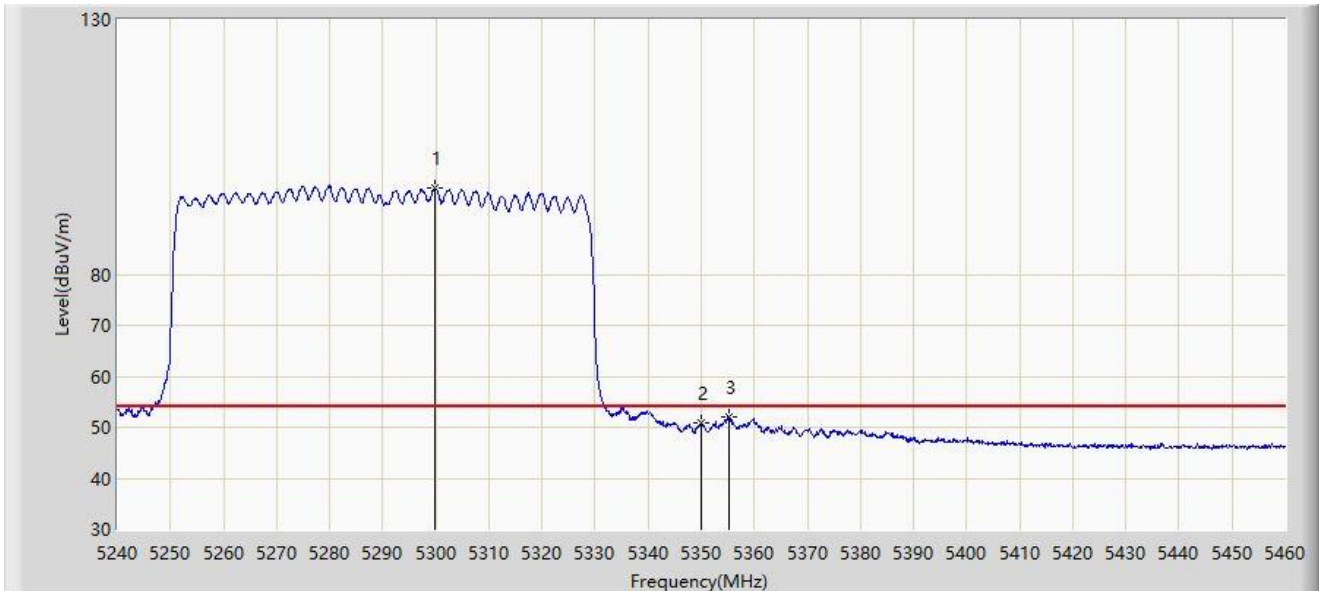


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5299.730	96.932	94.209	N/A	N/A	2.722	AV
2		5350.000	50.738	47.918	-3.262	54.000	2.820	AV
3	*	5355.170	51.996	49.196	-2.004	54.000	2.800	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-18
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250 MHz	

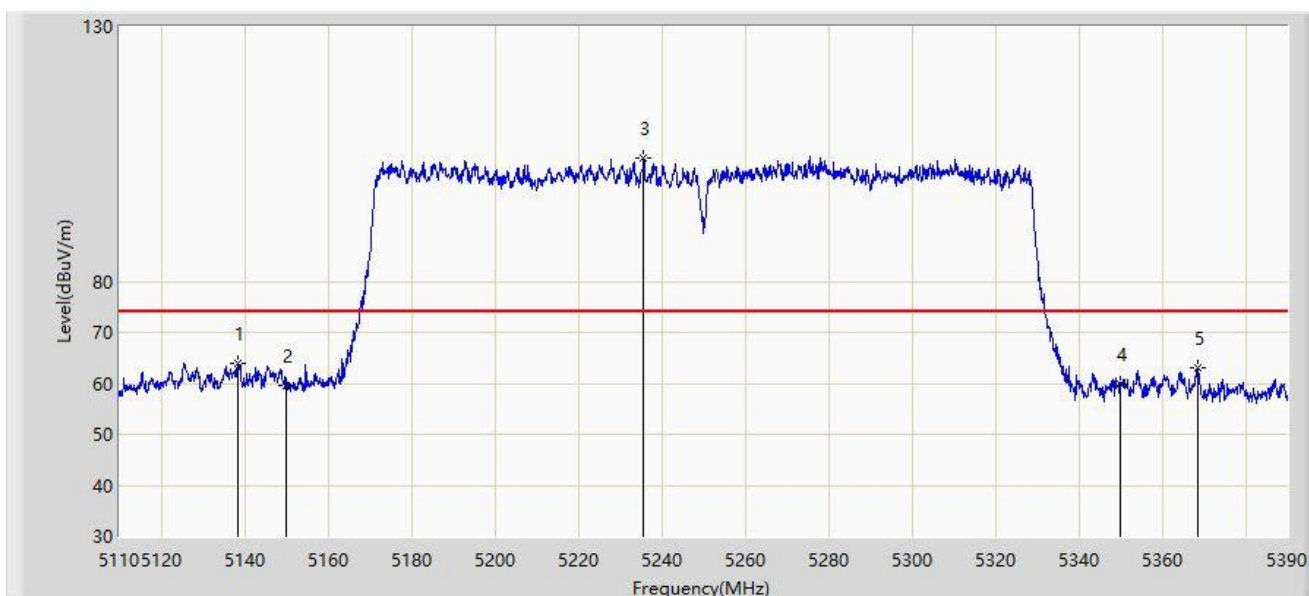


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5138.420	64.026	60.671	-9.974	74.000	3.355	PK
2		5150.000	59.663	56.181	-14.337	74.000	3.482	PK
3		5235.580	104.250	101.024	N/A	N/A	3.226	PK
4		5350.000	59.821	57.001	-14.179	74.000	2.820	PK
5		5368.440	63.106	60.247	-10.894	74.000	2.859	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-18
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250 MHz	

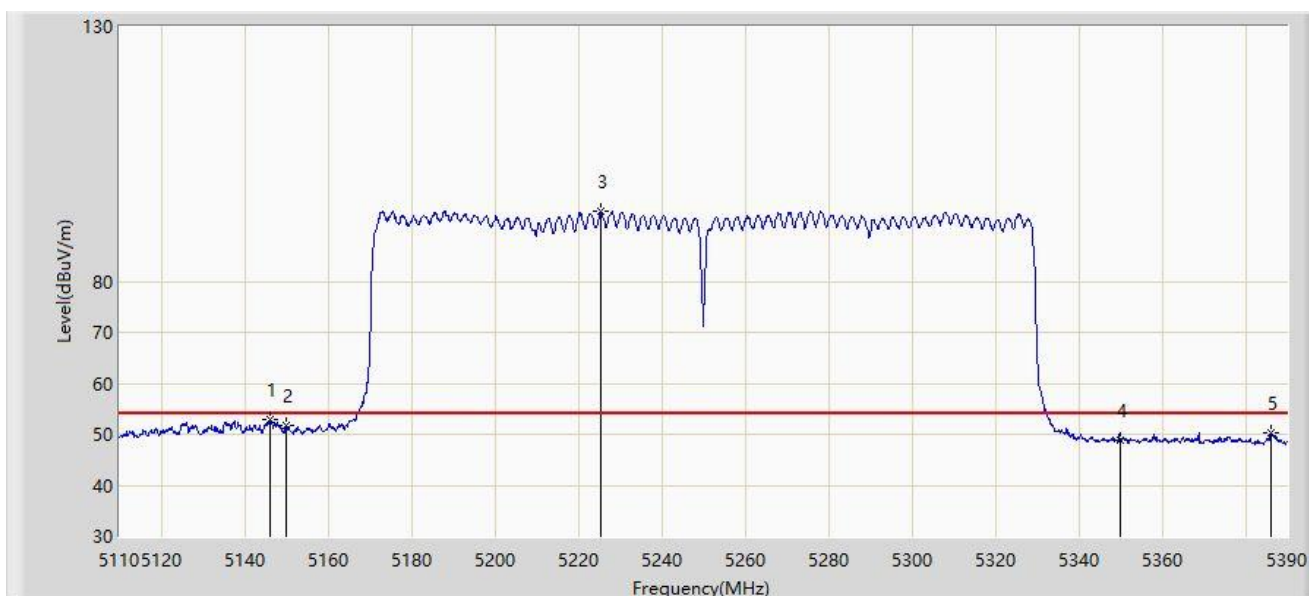


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.120	52.996	49.544	-1.004	54.000	3.452	AV
2		5150.000	51.706	48.224	-2.294	54.000	3.482	AV
3		5225.500	93.723	90.642	N/A	N/A	3.081	AV
4		5350.000	48.792	45.972	-5.208	54.000	2.820	AV
5		5386.220	50.333	47.134	-3.667	54.000	3.199	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-18
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250 MHz	

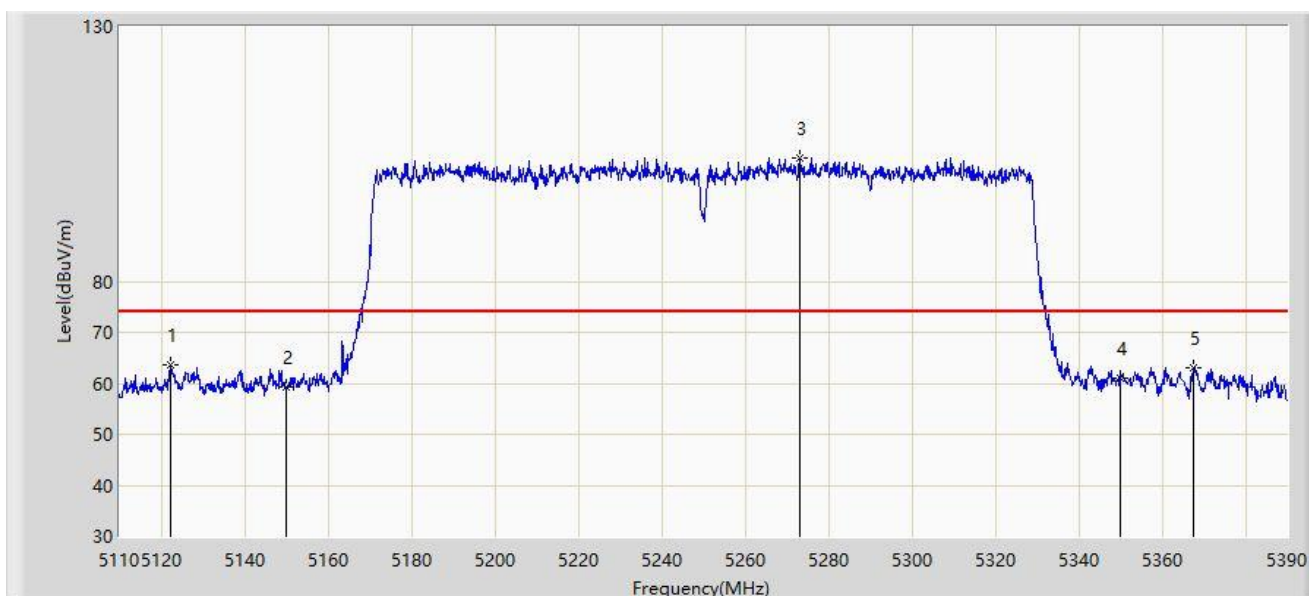


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5122.320	63.486	60.218	-10.514	74.000	3.269	PK
2		5150.000	59.302	55.820	-14.698	74.000	3.482	PK
3		5273.100	104.279	101.640	N/A	N/A	2.639	PK
4		5350.000	60.910	58.090	-13.090	74.000	2.820	PK
5		5367.600	63.131	60.275	-10.869	74.000	2.856	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-18
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250 MHz	

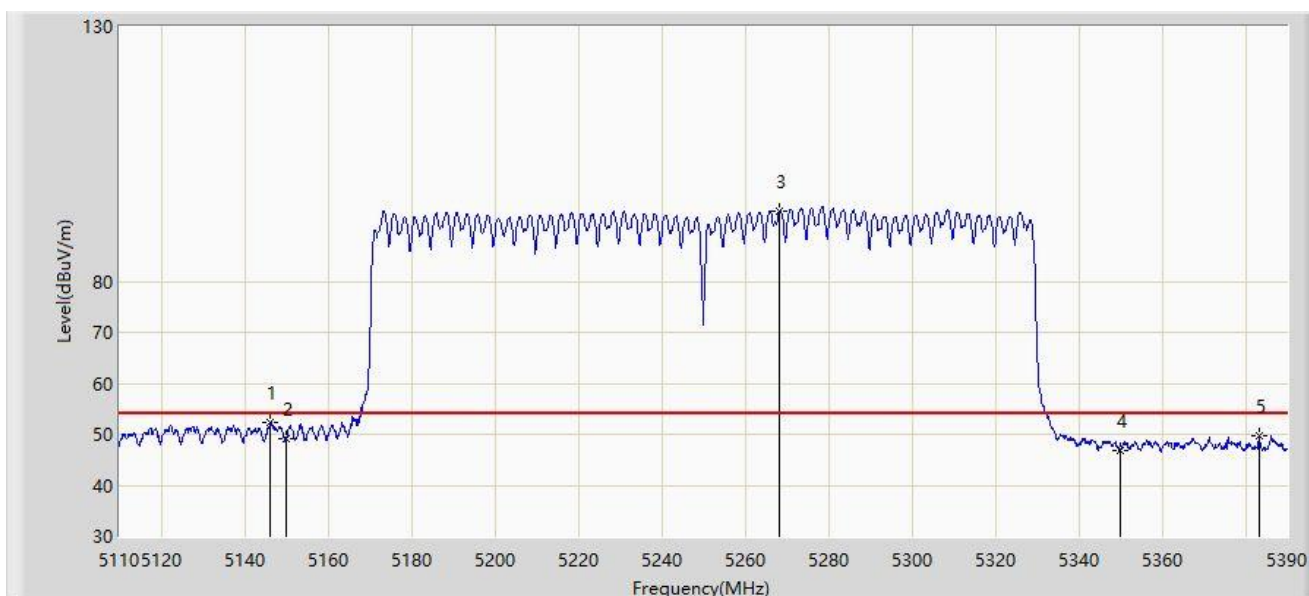


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5146.120	52.381	48.929	-1.619	54.000	3.452	AV
2		5150.000	48.987	45.505	-5.013	54.000	3.482	AV
3		5268.340	93.872	91.150	N/A	N/A	2.722	AV
4		5350.000	46.855	44.035	-7.145	54.000	2.820	AV
5		5383.280	49.747	46.608	-4.253	54.000	3.140	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180 MHz	

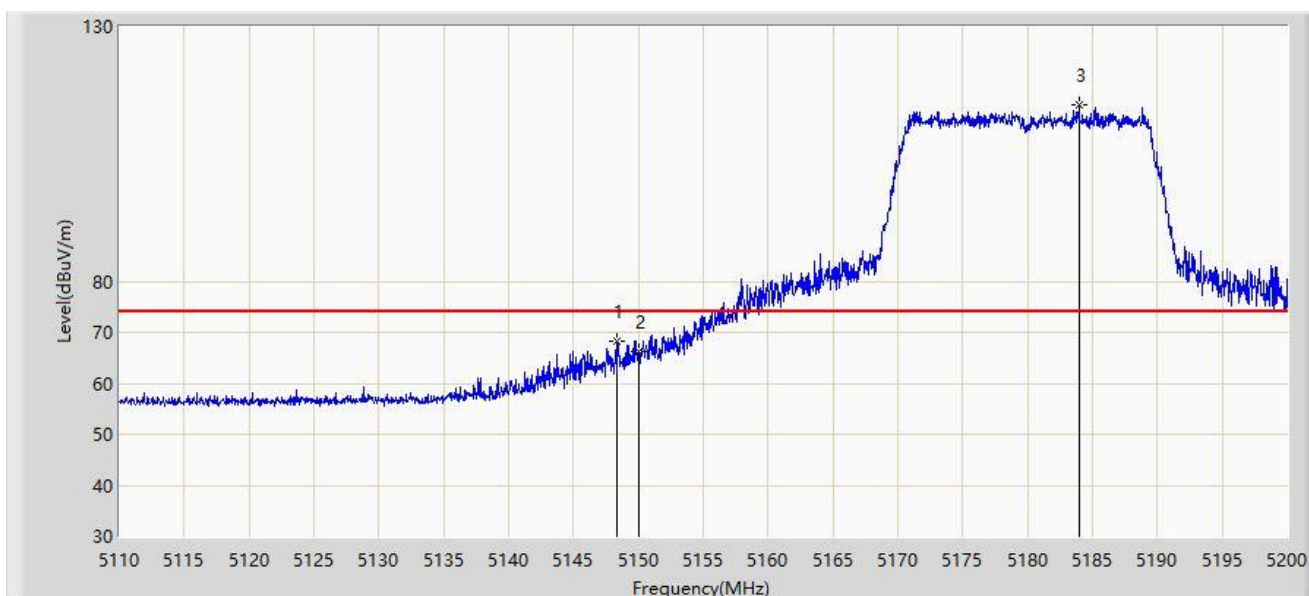


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.295	68.335	64.859	-5.665	74.000	3.476	PK
2		5150.000	66.105	62.623	-7.895	74.000	3.482	PK
3		5183.935	114.570	111.385	N/A	N/A	3.185	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180 MHz	

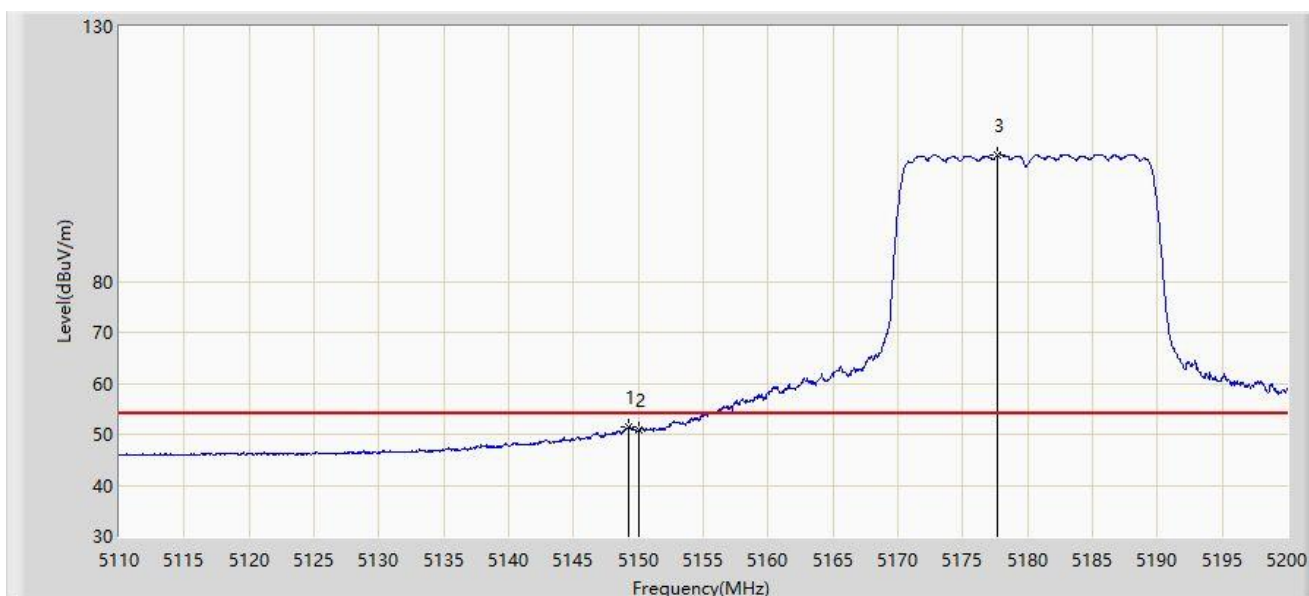


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.240	51.337	47.858	-2.663	54.000	3.479	AV
2		5150.000	50.761	47.279	-3.239	54.000	3.482	AV
3		5177.680	104.709	101.393	N/A	N/A	3.317	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180 MHz	

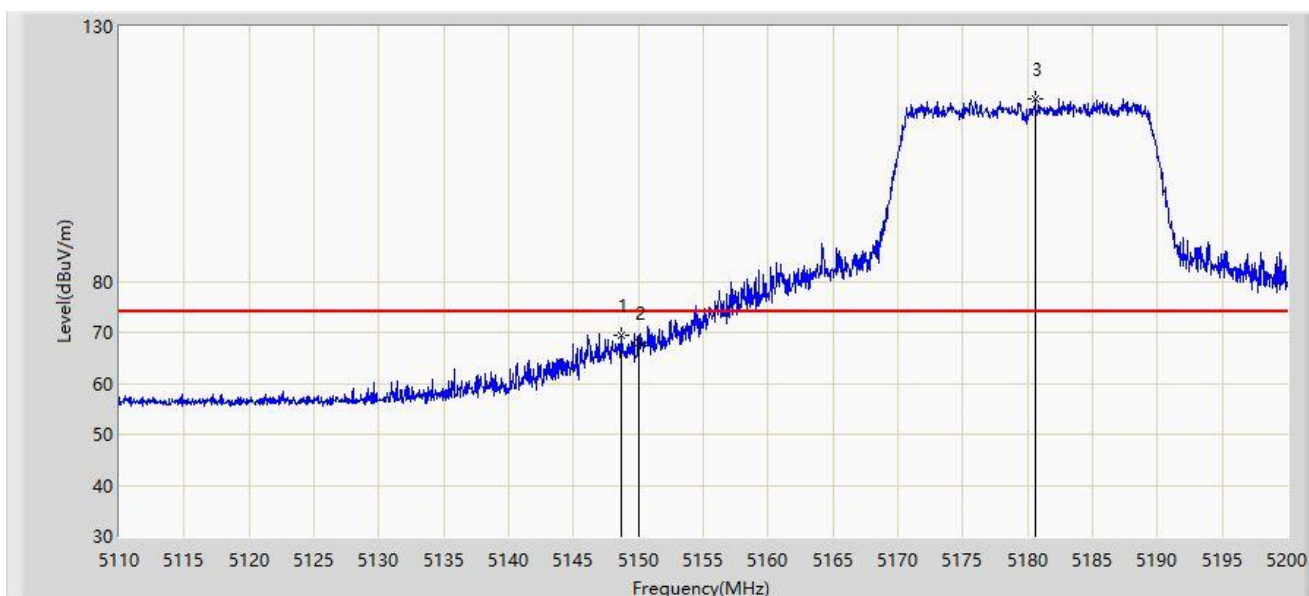


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.655	69.529	66.051	-4.471	74.000	3.478	PK
2		5150.000	67.870	64.388	-6.130	74.000	3.482	PK
3		5180.605	115.886	112.628	N/A	N/A	3.258	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180 MHz	

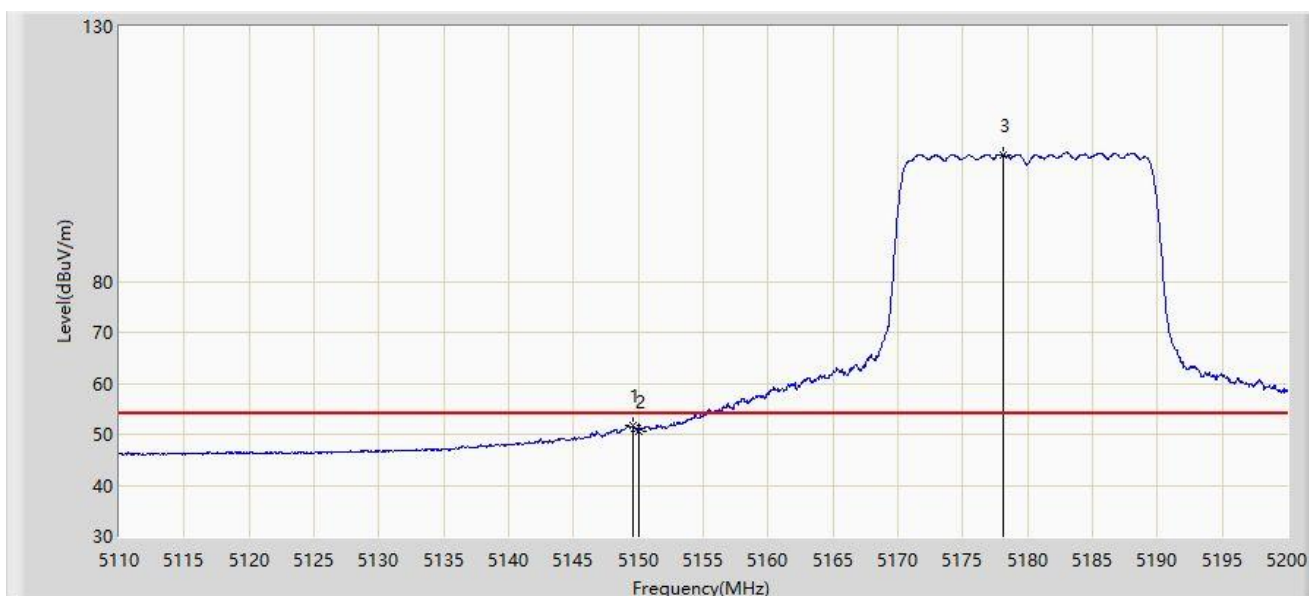


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.555	51.848	48.368	-2.152	54.000	3.480	AV
2		5150.000	50.711	47.229	-3.289	54.000	3.482	AV
3		5178.130	104.908	101.601	N/A	N/A	3.307	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320 MHz	

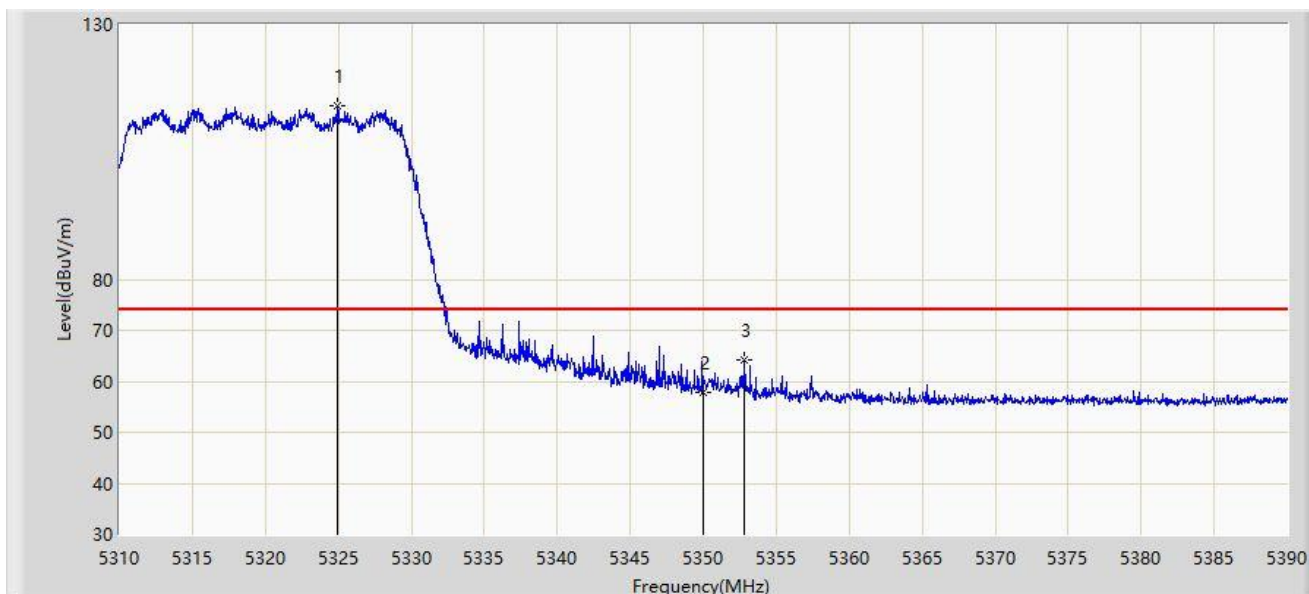


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5324.960	113.958	110.959	N/A	N/A	3.000	PK
2		5350.000	57.808	54.988	-16.192	74.000	2.820	PK
3	*	5352.840	64.265	61.475	-9.735	74.000	2.790	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320 MHz	

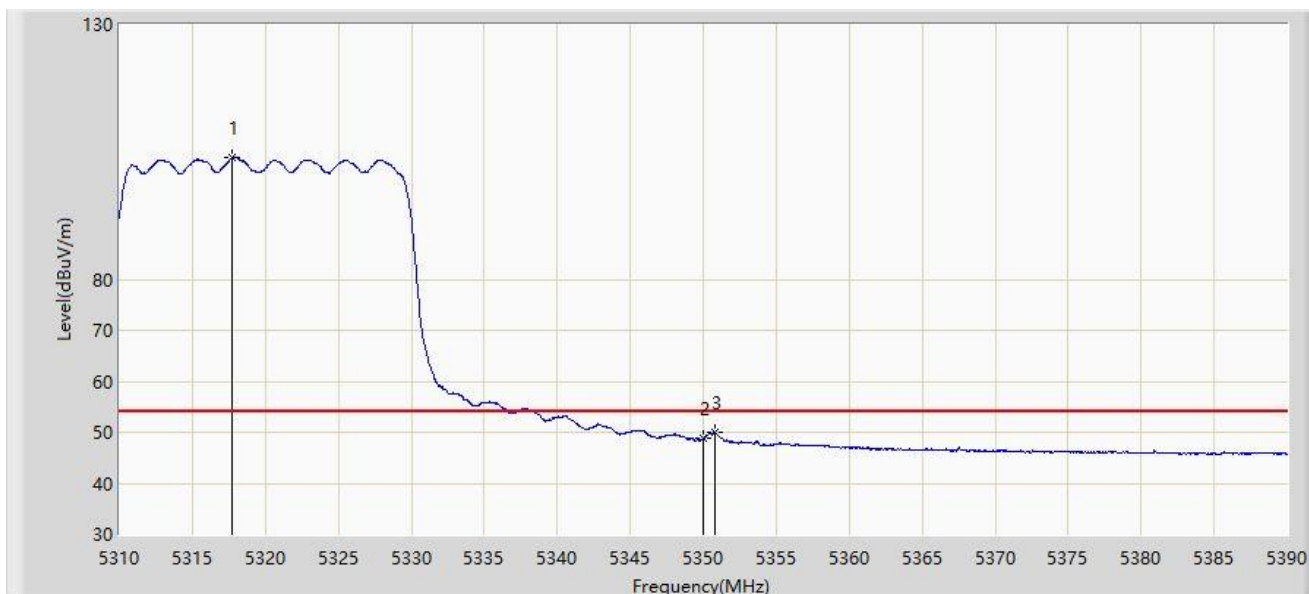


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.760	103.808	100.802	N/A	N/A	3.007	AV
2		5350.000	48.844	46.024	-5.156	54.000	2.820	AV
3	*	5350.760	50.064	47.257	-3.936	54.000	2.806	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320 MHz	

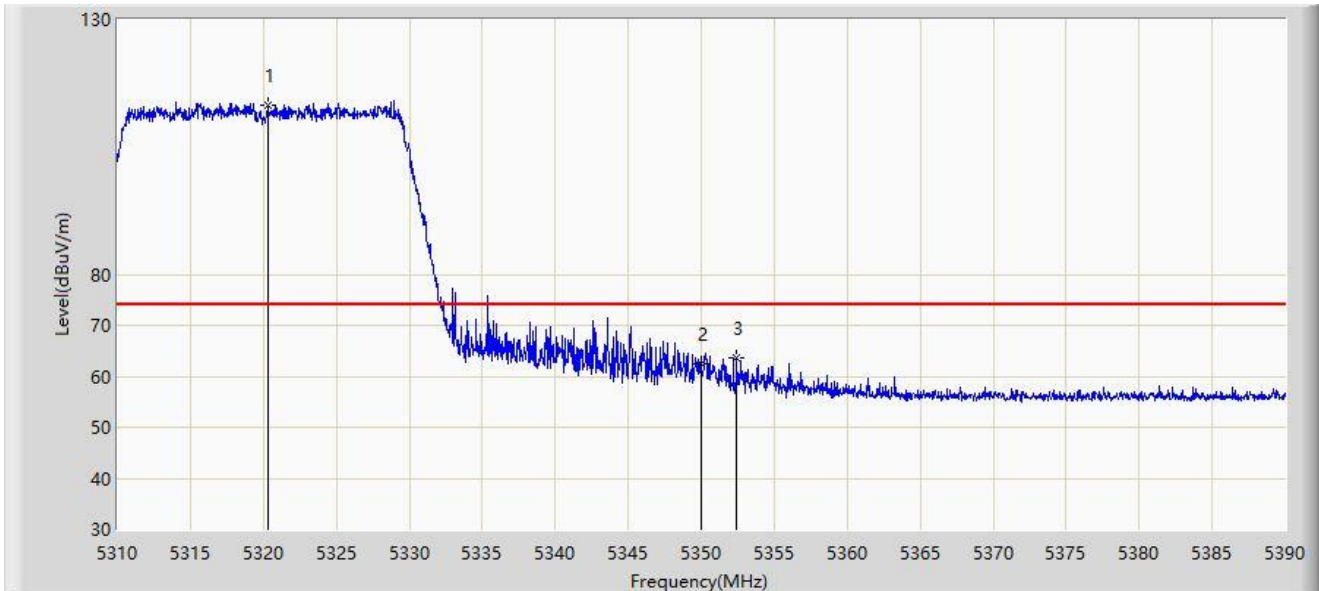


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.280	113.144	110.137	N/A	N/A	3.006	PK
2		5350.000	62.350	59.530	-11.650	74.000	2.820	PK
3	*	5352.400	63.553	60.765	-10.447	74.000	2.788	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320 MHz	

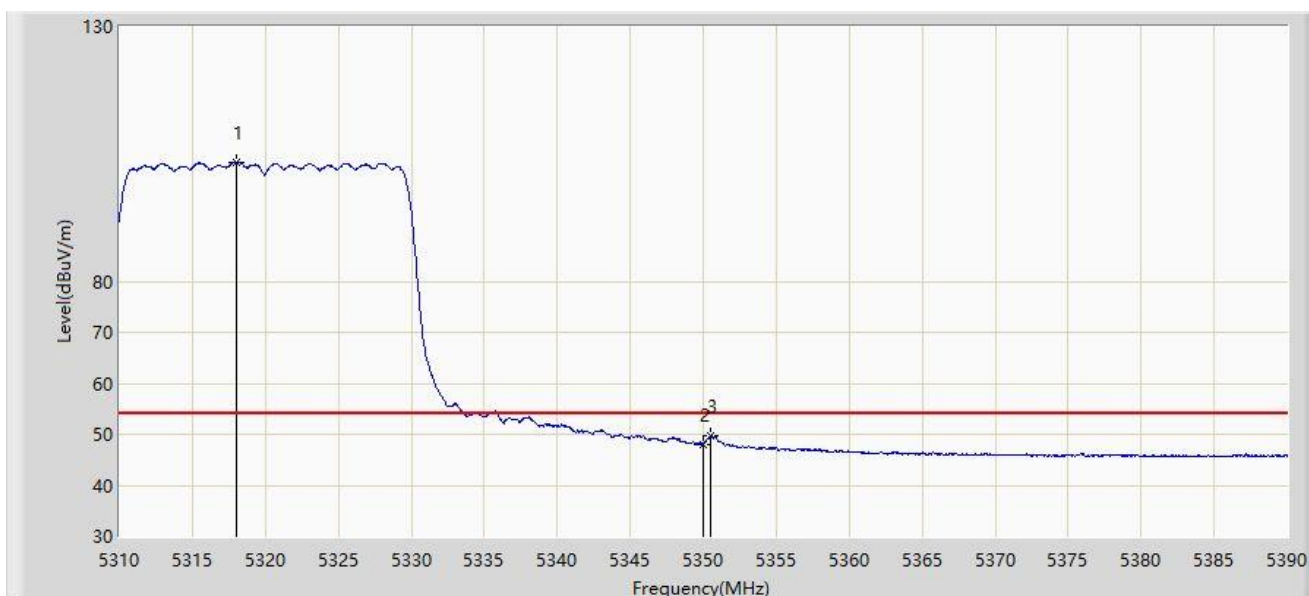


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.040	103.465	100.455	N/A	N/A	3.010	AV
2		5350.000	48.094	45.274	-5.906	54.000	2.820	AV
3	*	5350.520	49.585	46.774	-4.415	54.000	2.812	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190 MHz	

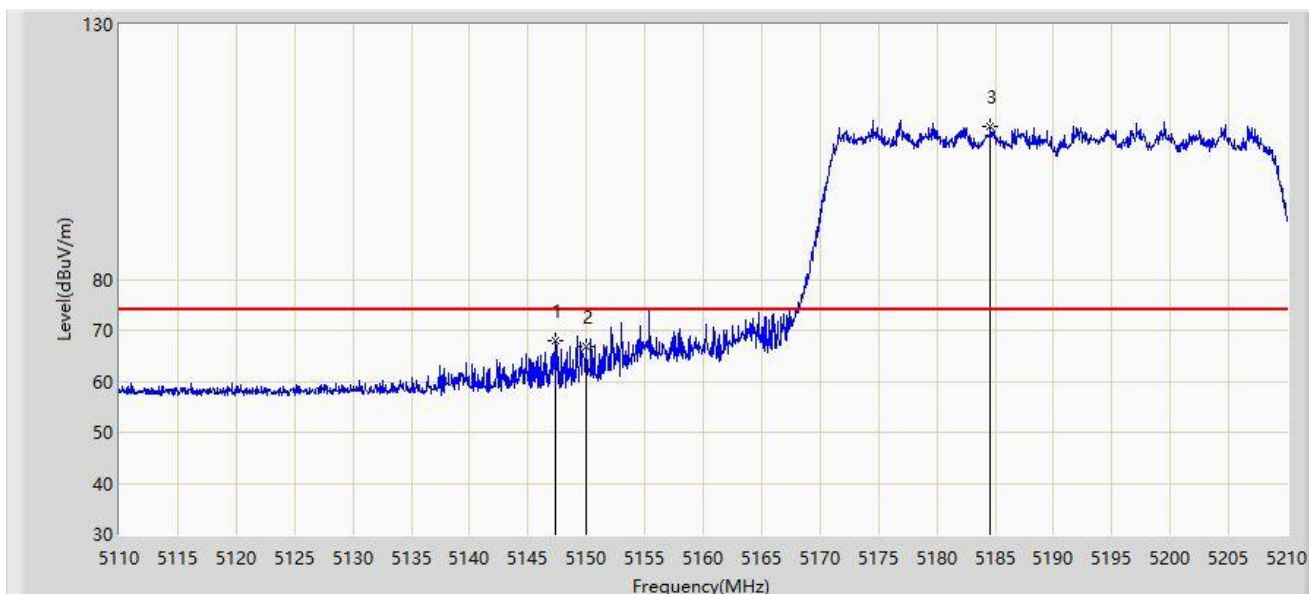


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.300	68.094	64.627	-5.906	74.000	3.467	PK
2		5150.000	66.682	63.200	-7.318	74.000	3.482	PK
3		5184.550	109.980	106.809	N/A	N/A	3.170	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190 MHz	

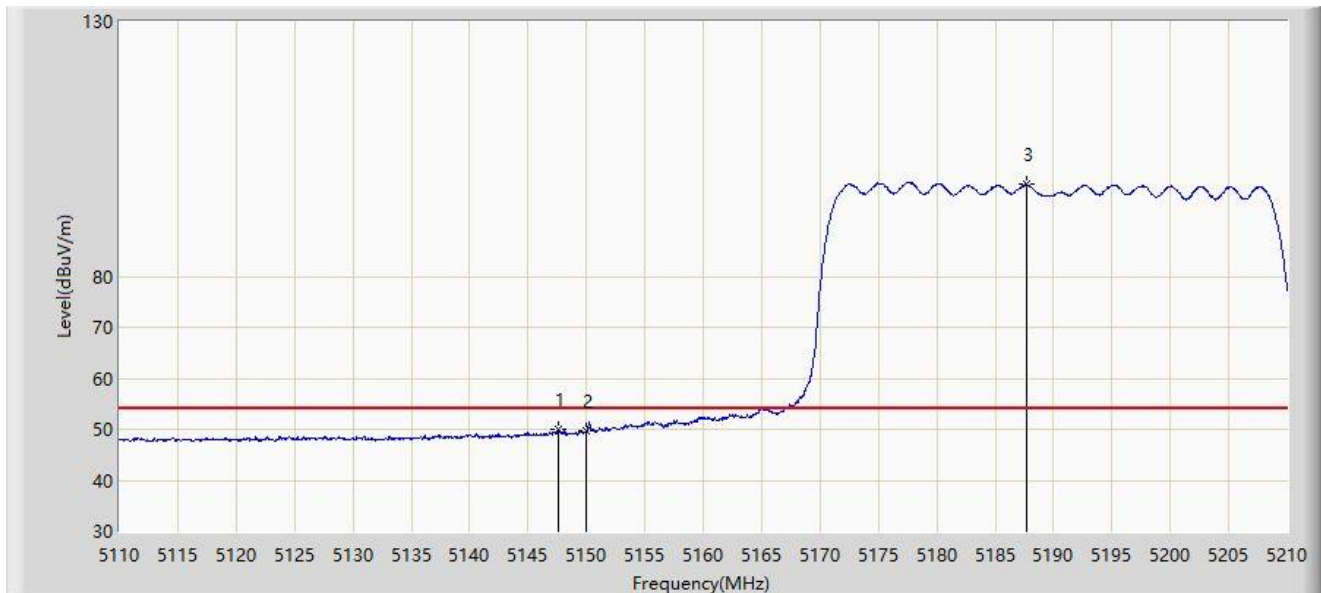


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.650	49.945	46.474	-4.055	54.000	3.472	AV
2		5150.000	49.676	46.194	-4.324	54.000	3.482	AV
3		5187.650	98.211	95.111	N/A	N/A	3.100	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190 MHz	

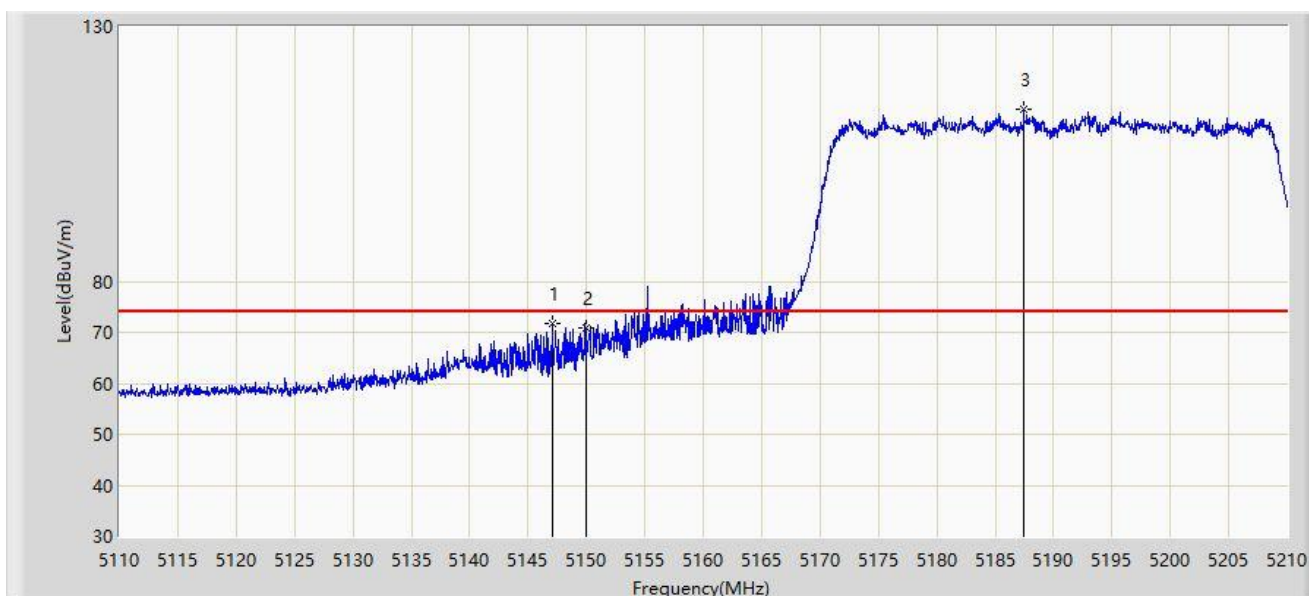


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.050	71.665	68.201	-2.335	74.000	3.463	PK
2		5150.000	71.012	67.530	-2.988	74.000	3.482	PK
3		5187.450	113.633	110.529	N/A	N/A	3.104	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190 MHz	

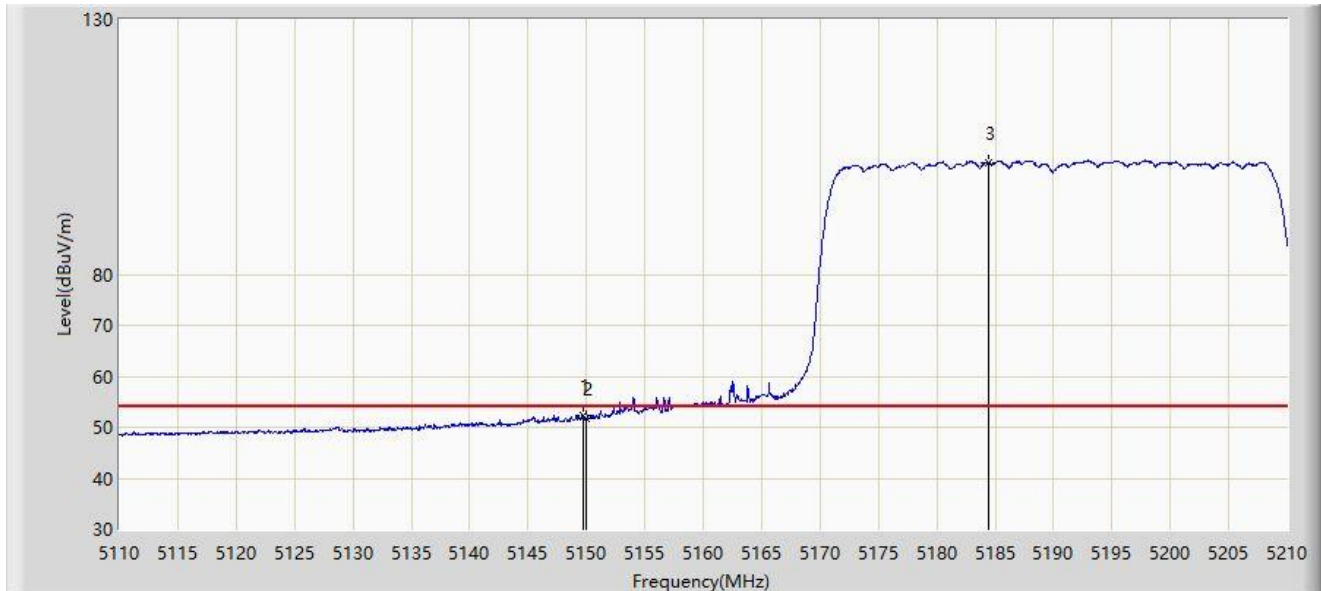


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.700	52.347	48.866	-1.653	54.000	3.482	AV
2		5150.000	51.646	48.164	-2.354	54.000	3.482	AV
3		5184.400	101.966	98.791	N/A	N/A	3.175	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310 MHz	

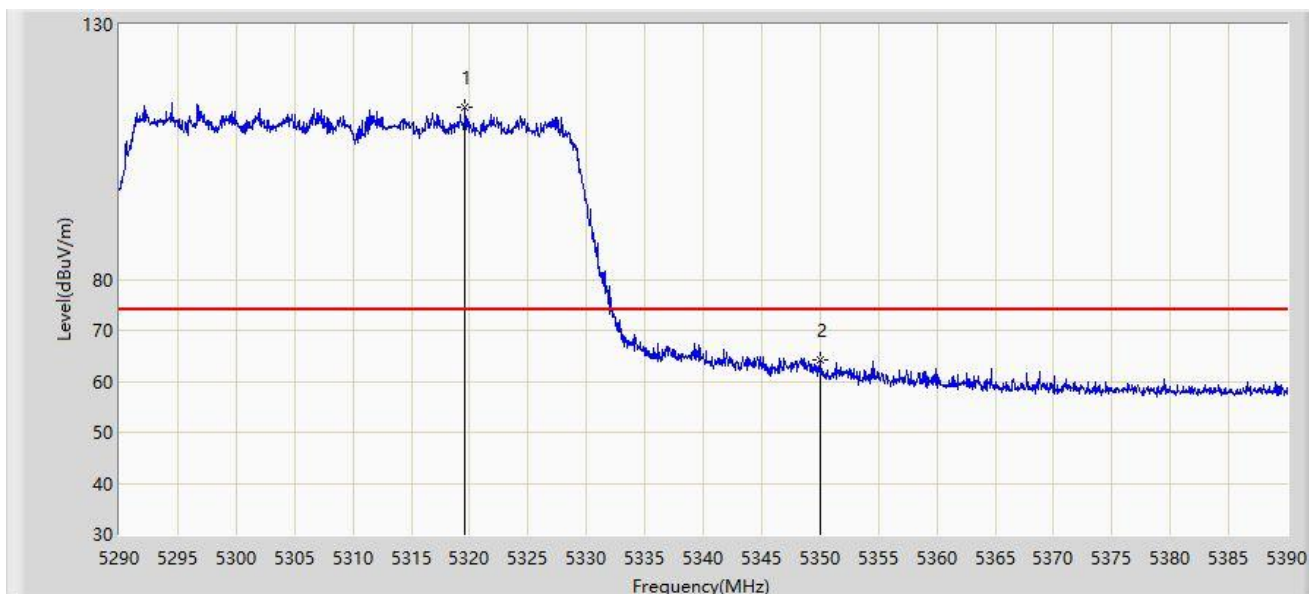


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.600	113.877	110.869	N/A	N/A	3.008	PK
2	*	5350.000	64.165	61.345	-9.835	74.000	2.820	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310 MHz	

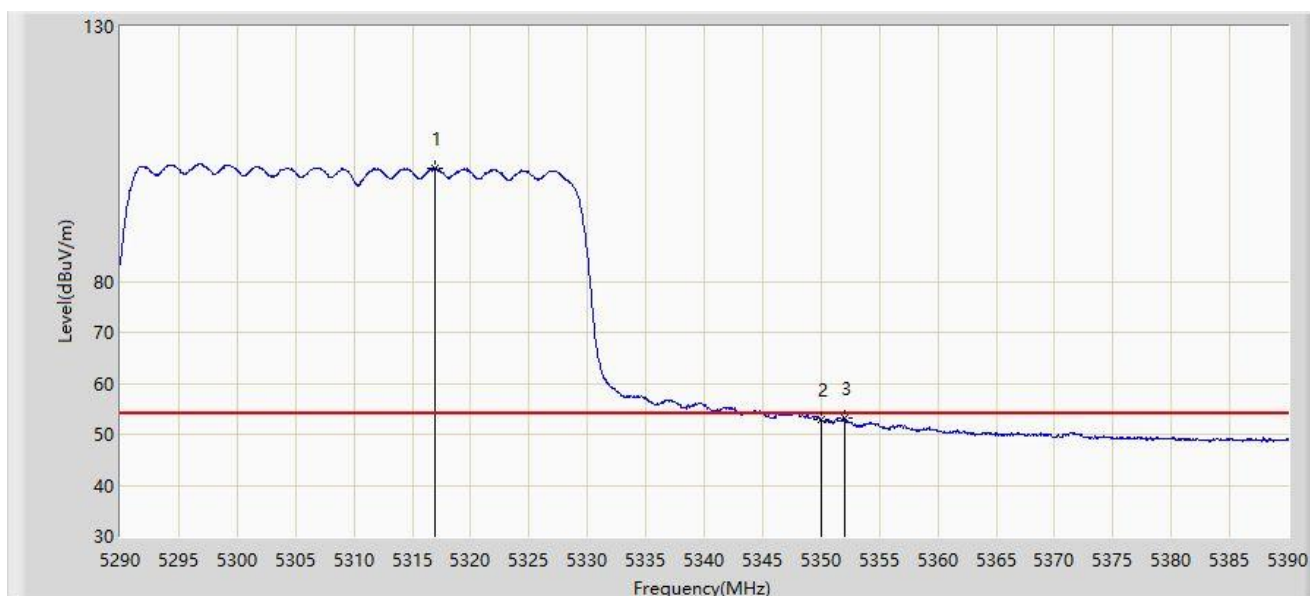


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5316.950	102.231	99.239	N/A	N/A	2.992	AV
2		5350.000	52.901	50.081	-1.099	54.000	2.820	AV
3	*	5352.000	53.261	50.475	-0.739	54.000	2.787	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310 MHz	

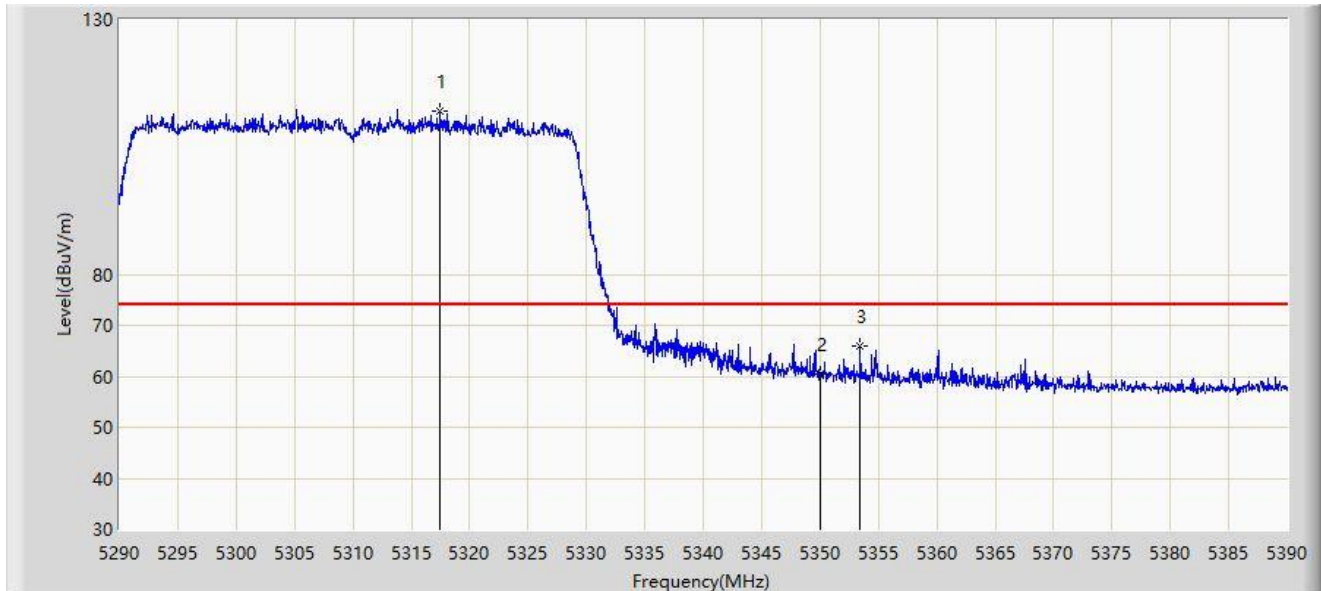


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.500	111.951	108.950	N/A	N/A	3.002	PK
2		5350.000	60.347	57.527	-13.653	74.000	2.820	PK
3	*	5353.450	65.892	63.099	-8.108	74.000	2.793	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-16
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310 MHz	

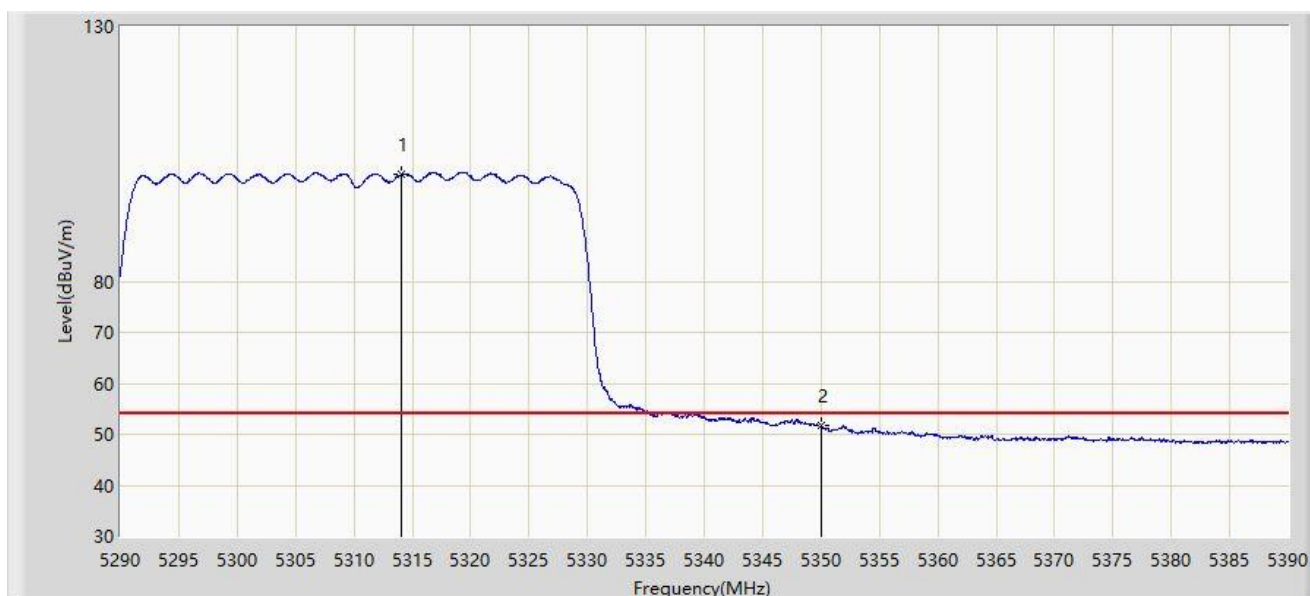


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5314.050	101.071	98.130	N/A	N/A	2.940	AV
2	*	5350.000	51.853	49.033	-2.147	54.000	2.820	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210 MHz	

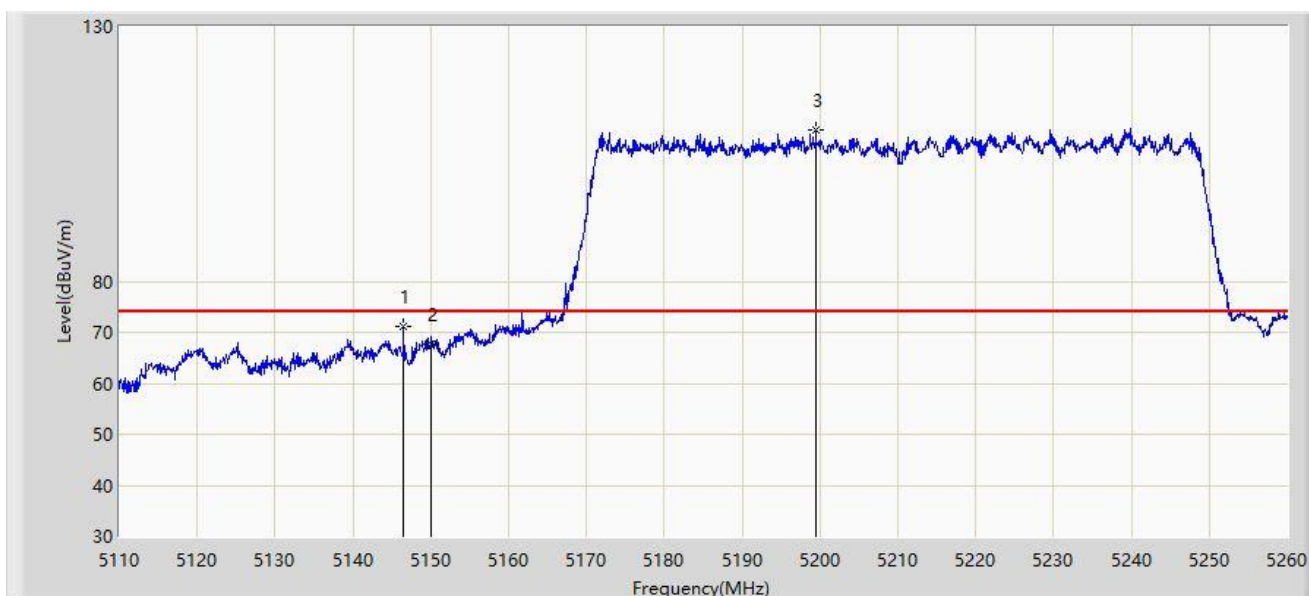


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.450	71.123	67.667	-2.877	74.000	3.456	PK
2		5150.000	67.754	64.272	-6.246	74.000	3.482	PK
3		5199.475	109.568	106.712	N/A	N/A	2.856	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210 MHz	

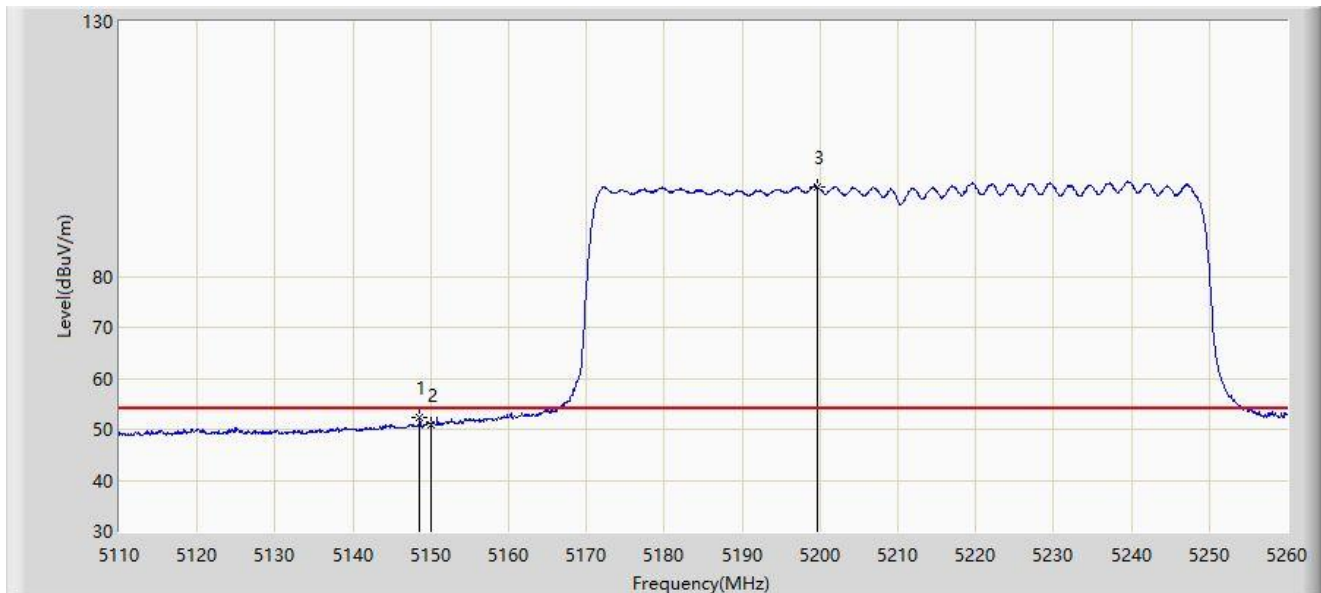


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.625	52.188	48.711	-1.812	54.000	3.478	AV
2		5150.000	50.892	47.410	-3.108	54.000	3.482	AV
3		5199.700	97.608	94.751	N/A	N/A	2.857	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210 MHz	

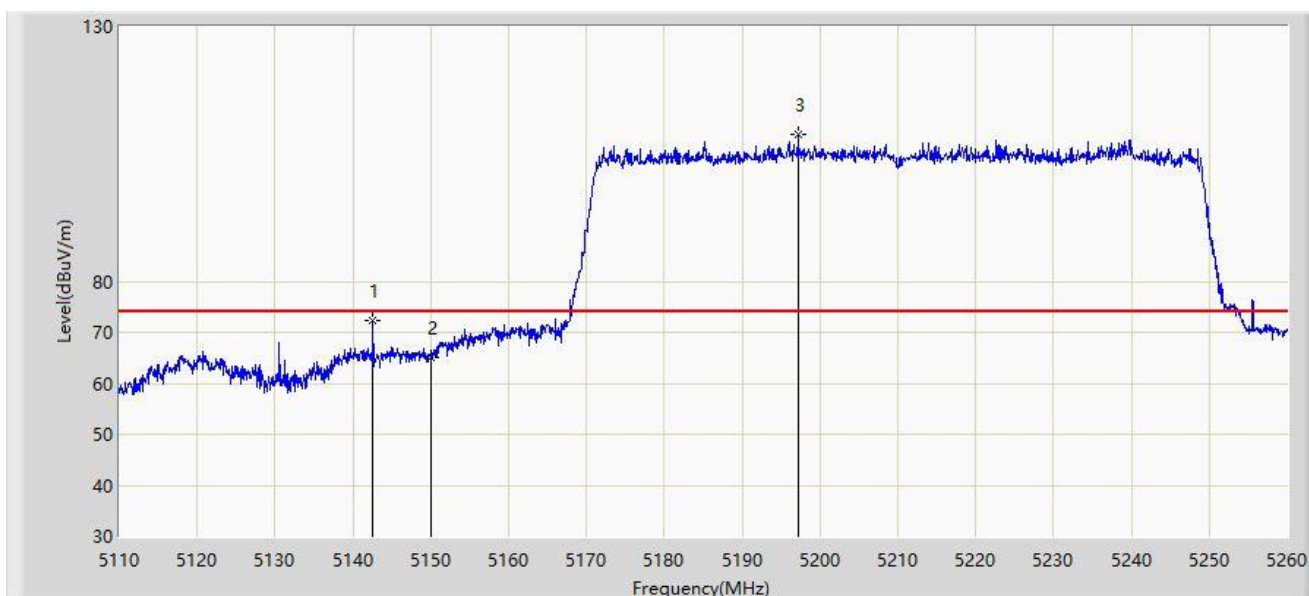


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5142.550	72.419	69.012	-1.581	74.000	3.407	PK
2		5150.000	65.181	61.699	-8.819	74.000	3.482	PK
3		5197.225	108.724	105.831	N/A	N/A	2.892	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210 MHz	

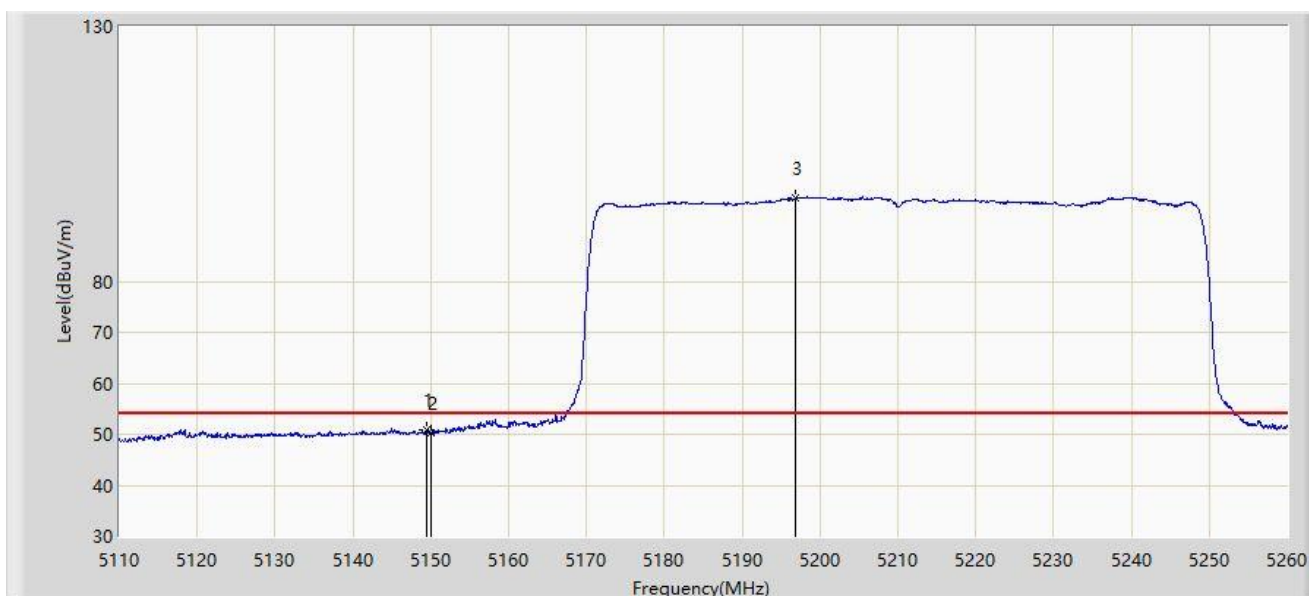


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.525	50.942	47.462	-3.058	54.000	3.480	AV
2		5150.000	50.256	46.774	-3.744	54.000	3.482	AV
3		5196.925	96.345	93.446	N/A	N/A	2.899	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290 MHz	

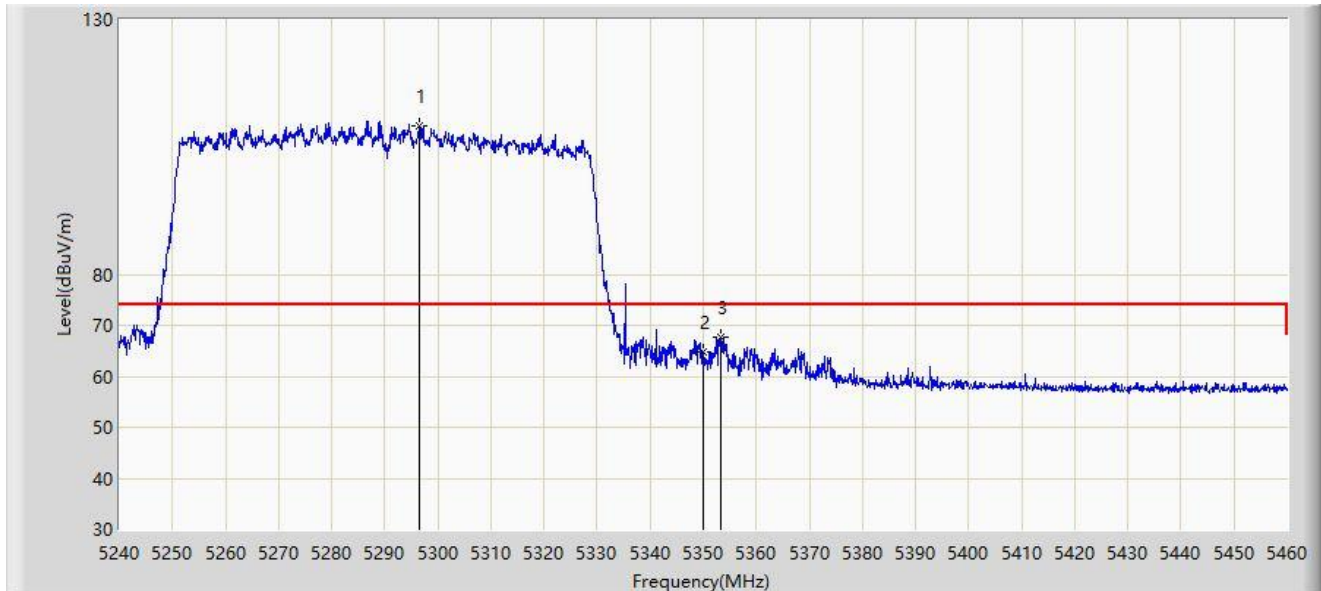


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5296.430	109.081	106.394	N/A	N/A	2.687	PK
2		5350.000	64.861	62.041	-9.139	74.000	2.820	PK
3	*	5353.410	67.802	65.010	-6.198	74.000	2.793	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290 MHz	

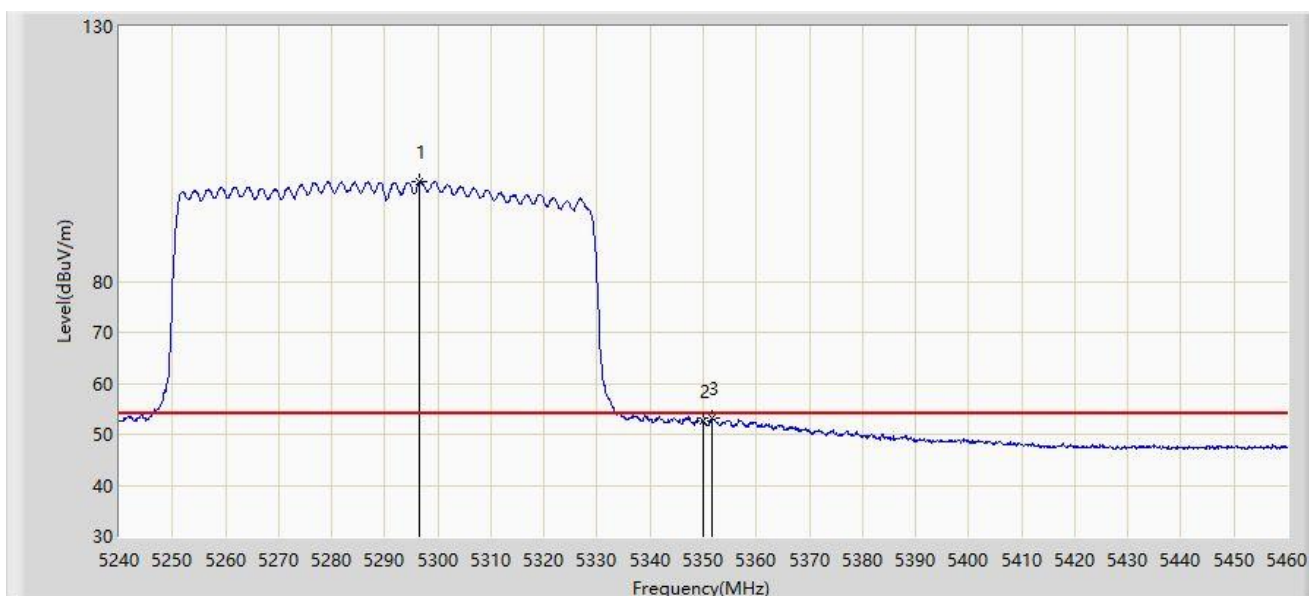


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5296.650	99.585	96.896	N/A	N/A	2.690	AV
2		5350.000	52.720	49.900	-1.280	54.000	2.820	AV
3	*	5351.540	53.069	50.275	-0.931	54.000	2.794	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290 MHz	

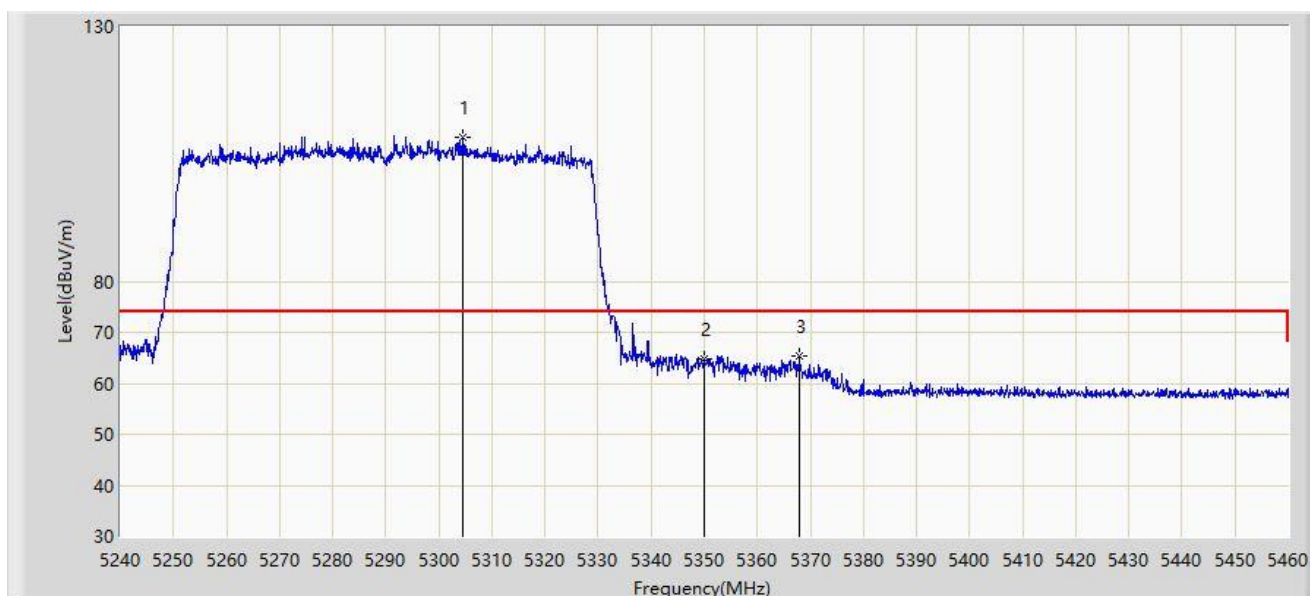


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5304.460	108.254	105.464	N/A	N/A	2.790	PK
2		5350.000	64.912	62.092	-9.088	74.000	2.820	PK
3	*	5367.930	65.391	62.534	-8.609	74.000	2.856	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290 MHz	

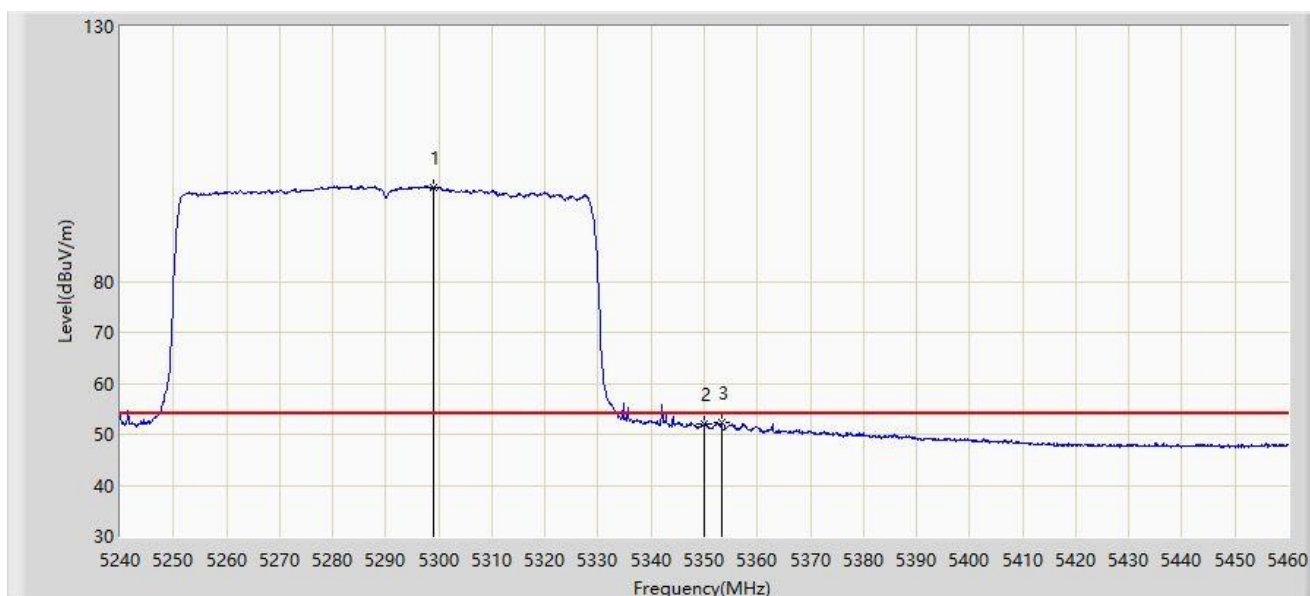


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5298.960	98.479	95.765	N/A	N/A	2.714	AV
2		5350.000	52.157	49.337	-1.843	54.000	2.820	AV
3	*	5353.300	52.459	49.667	-1.541	54.000	2.792	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250 MHz	

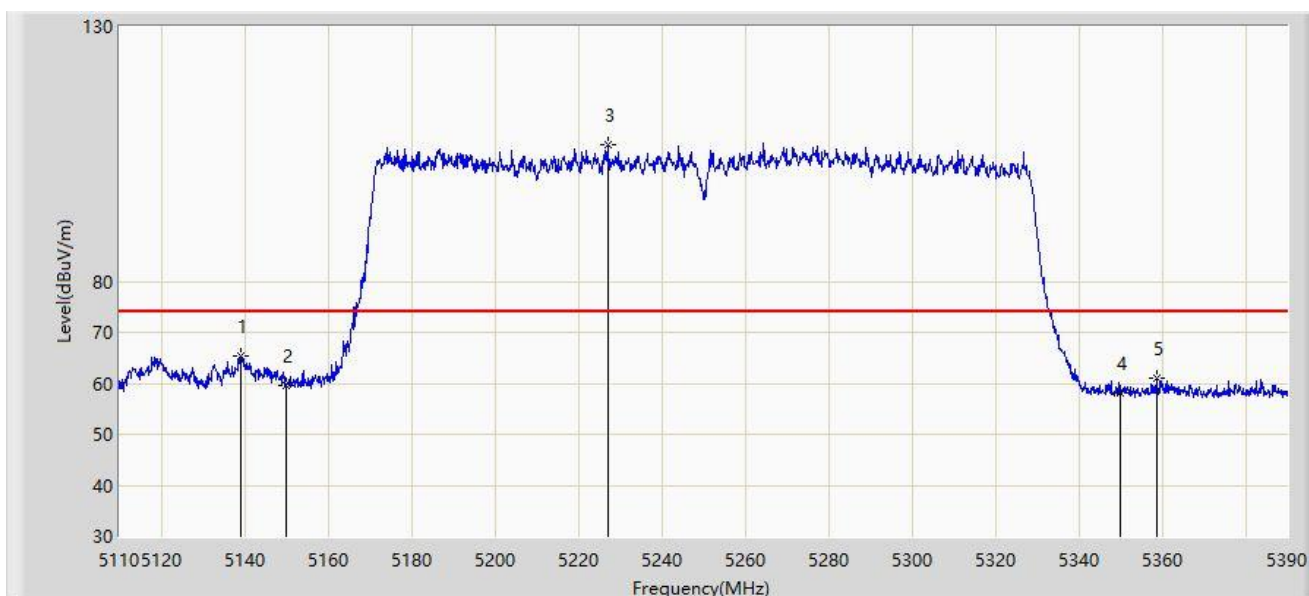


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5138.980	65.442	62.080	-8.558	74.000	3.361	PK
2		5150.000	59.639	56.157	-14.361	74.000	3.482	PK
3		5227.040	106.816	103.704	N/A	N/A	3.111	PK
4		5350.000	58.238	55.418	-15.762	74.000	2.820	PK
5		5358.640	61.073	58.257	-12.927	74.000	2.816	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250 MHz	

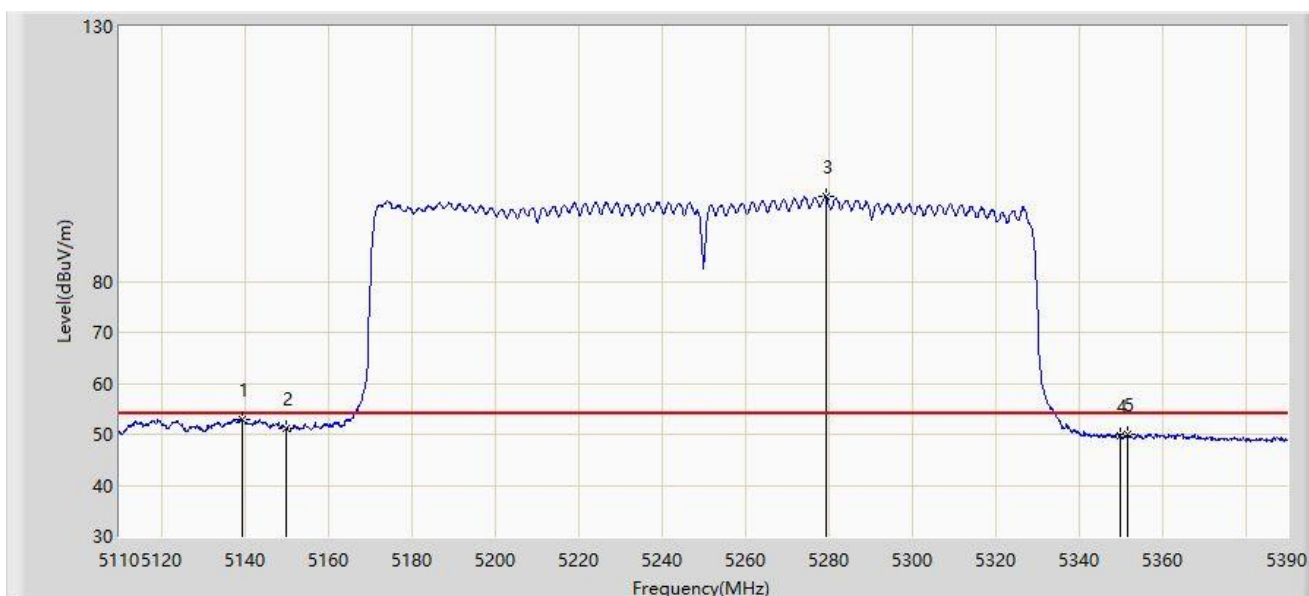


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5139.400	52.948	49.581	-1.052	54.000	3.367	AV
2		5150.000	51.066	47.584	-2.934	54.000	3.482	AV
3		5279.400	96.628	94.078	N/A	N/A	2.551	AV
4		5350.000	49.675	46.855	-4.325	54.000	2.820	AV
5		5351.920	49.887	47.099	-4.113	54.000	2.788	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-17
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250 MHz	

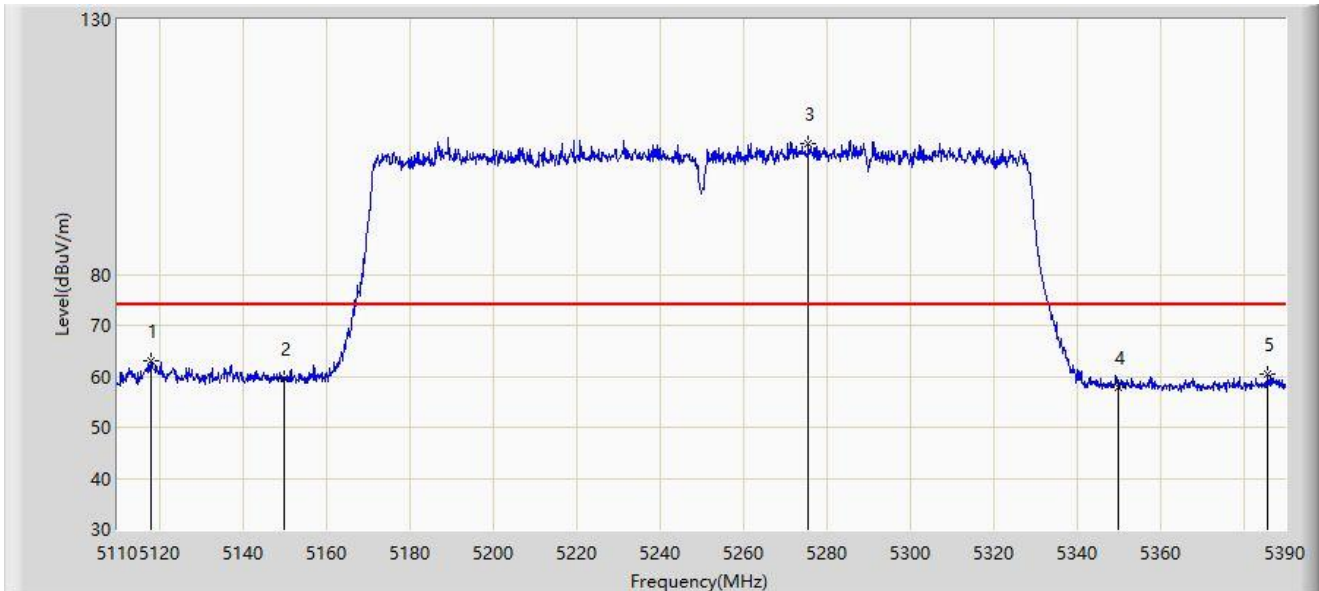


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5117.980	63.114	59.844	-10.886	74.000	3.270	PK
2		5150.000	59.617	56.135	-14.383	74.000	3.482	PK
3		5275.760	105.767	103.175	N/A	N/A	2.592	PK
4		5350.000	57.825	55.005	-16.175	74.000	2.820	PK
5		5385.940	60.302	57.108	-13.698	74.000	3.194	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-11-18
Limit: FCC_5G_RE (3 m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250 MHz	

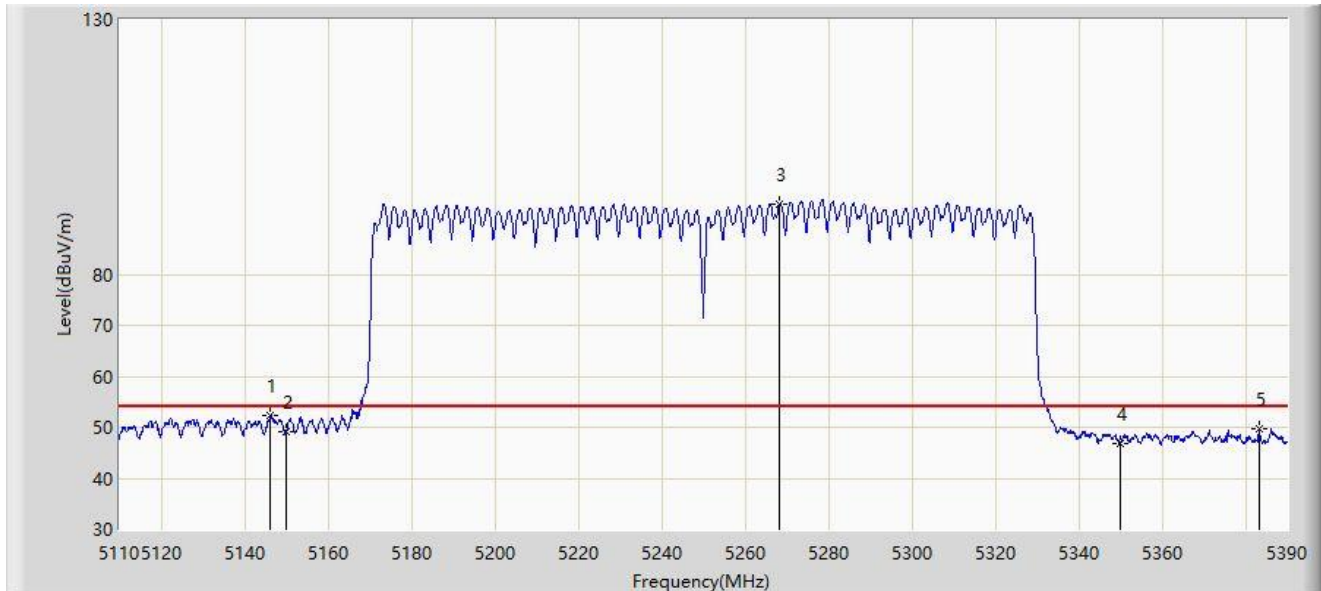

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.120	52.381	48.929	-1.619	54.000	3.452	AV
2		5150.000	48.987	45.505	-5.013	54.000	3.482	AV
3		5268.340	93.872	91.150	N/A	N/A	2.722	AV
4		5350.000	46.855	44.035	-7.145	54.000	2.820	AV
5		5383.280	49.747	46.608	-4.253	54.000	3.140	AV


Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.8 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-12-26
Temperature	18.0 °C	Humidity	30.4%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11a at 5180 MHz		

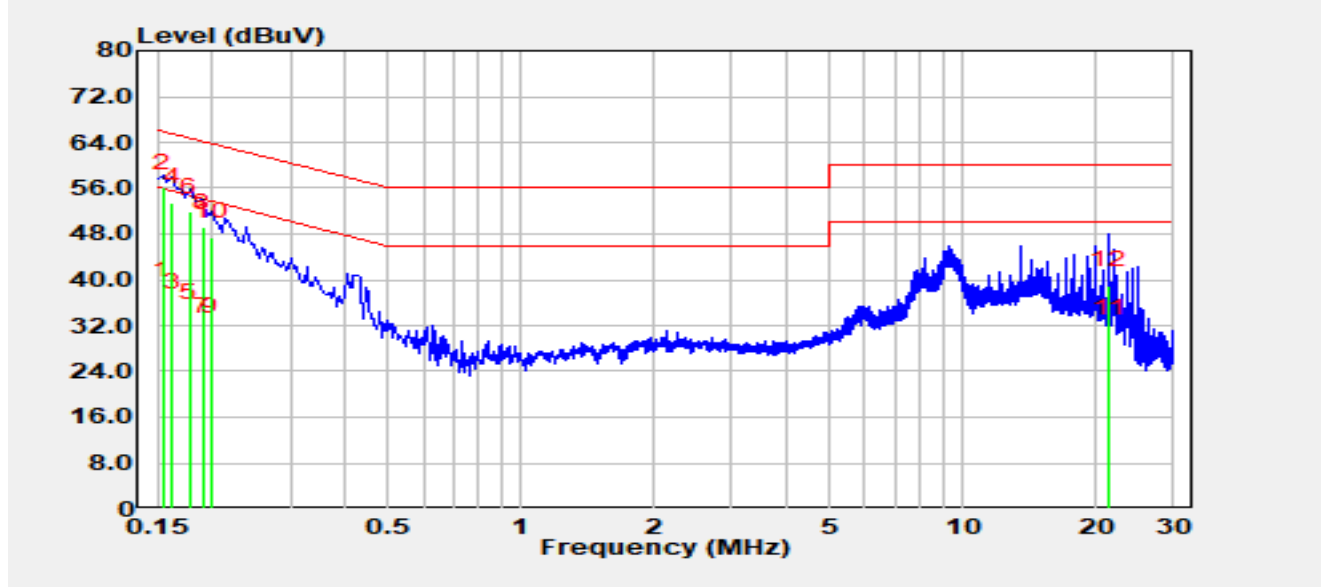


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	27.50	9.67	37.17	-18.61	55.78	Average
2	*	0.15	46.40	9.67	56.07	-9.71	65.78	QP
3		0.16	25.50	9.67	35.17	-20.19	55.36	Average
4		0.16	43.80	9.67	53.47	-11.89	65.36	QP
5		0.18	23.60	9.68	33.28	-21.30	54.58	Average
6		0.18	42.20	9.68	51.88	-12.70	64.58	QP
7		0.19	21.30	9.68	30.98	-23.05	54.04	Average
8		0.19	39.40	9.68	49.08	-14.95	64.04	QP
9		0.20	21.40	9.69	31.09	-22.61	53.69	Average
10		0.20	37.80	9.69	47.49	-16.21	63.69	QP
11		21.43	20.00	10.63	30.63	-19.37	50.00	Average
12		21.43	28.40	10.63	39.03	-20.97	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2025-12-26
Temperature	18.0 °C	Humidity	30.4%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11a at 5180 MHz		

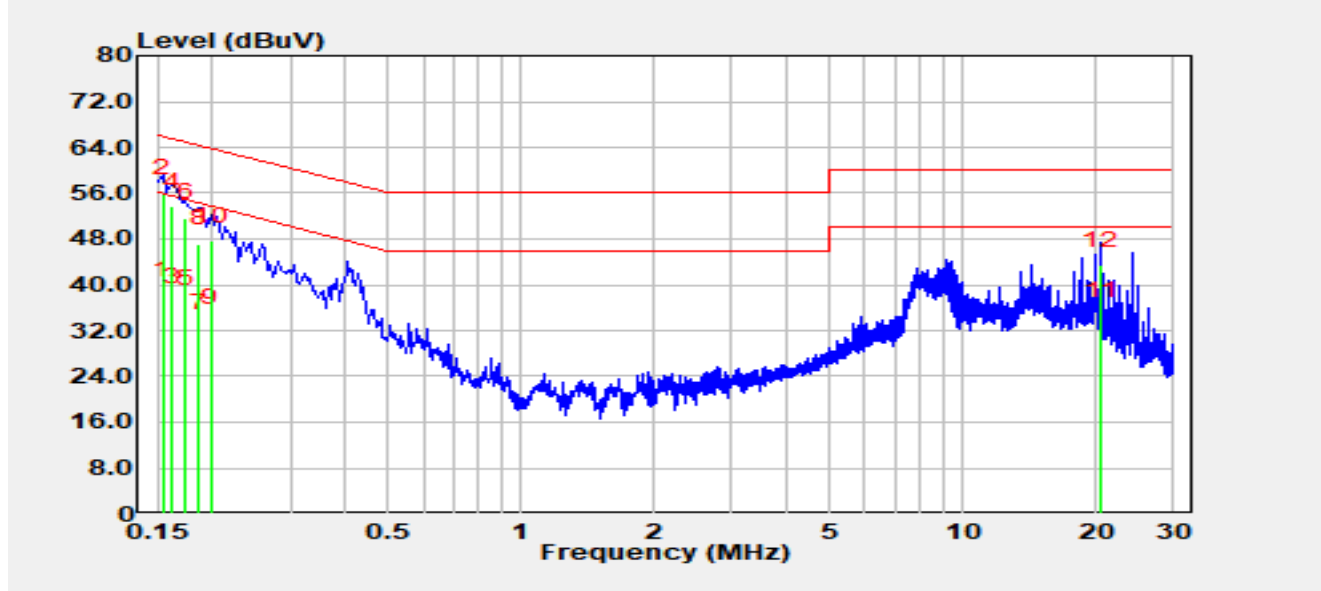

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	28.50	9.79	38.29	-17.49	55.78	Average
2	*	0.15	46.10	9.79	55.89	-9.89	65.78	QP
3		0.16	27.10	9.79	36.89	-18.47	55.36	Average
4		0.16	43.80	9.79	53.59	-11.77	65.36	QP
5		0.17	26.80	9.80	36.60	-18.17	54.77	Average
6		0.17	41.90	9.80	51.70	-13.07	64.77	QP
7		0.19	22.80	9.80	32.60	-21.62	54.21	Average
8		0.19	37.30	9.80	47.10	-17.12	64.21	QP
9		0.20	23.70	9.80	33.50	-20.20	53.69	Average
10		0.20	37.90	9.80	47.70	-16.00	63.69	QP
11		20.63	23.90	10.73	34.63	-15.37	50.00	Average
12		20.63	32.70	10.73	43.43	-16.57	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1013119-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1013119-UE” file.

_____ The End _____