


|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-19 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz |                       |

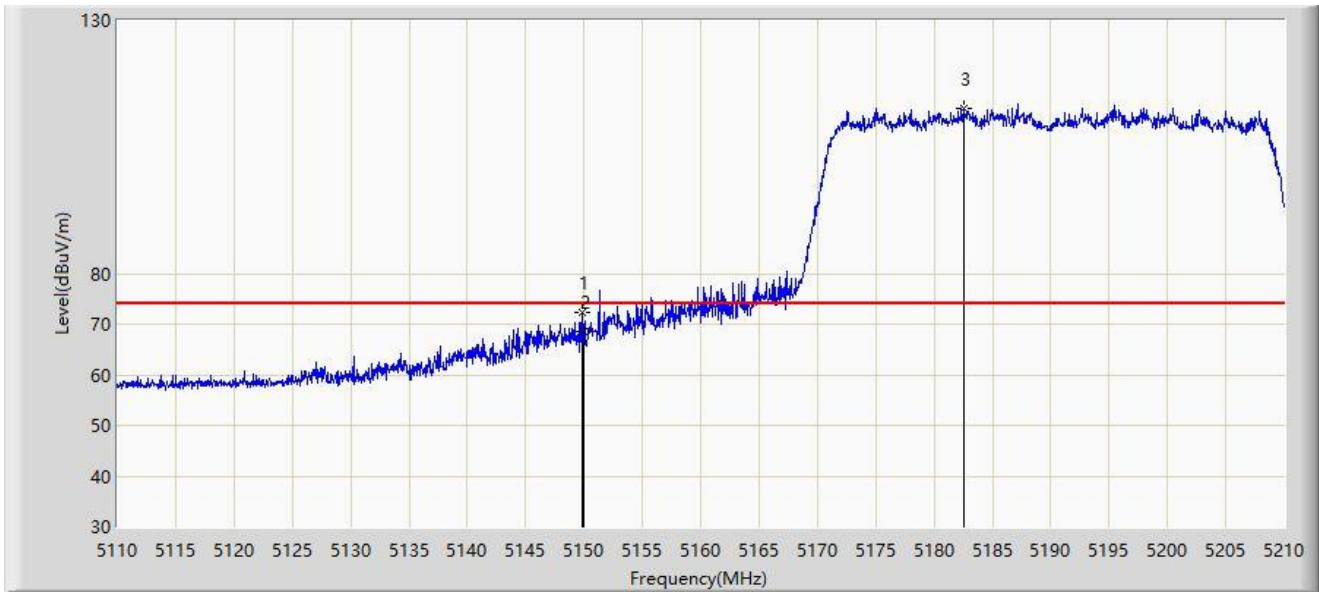


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.800        | 72.423                 | 68.942               | -1.577      | 74.000         | 3.481         | PK   |
| 2  |      | 5150.000        | 68.409                 | 64.927               | -5.591      | 74.000         | 3.482         | PK   |
| 3  |      | 5182.600        | 112.484                | 109.268              | N/A         | N/A            | 3.216         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-19 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz |                       |

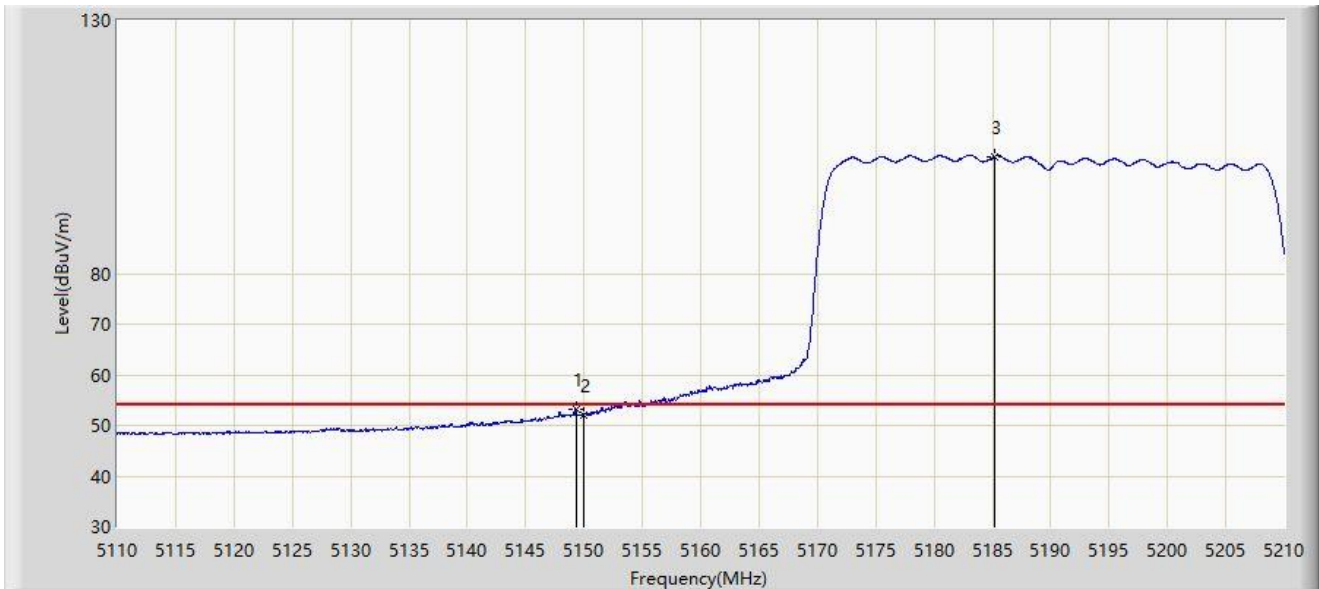


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.300        | 53.071                 | 49.592               | -0.929      | 54.000         | 3.479         | AV   |
| 2  |      | 5150.000        | 52.173                 | 48.691               | -1.827      | 54.000         | 3.482         | AV   |
| 3  |      | 5185.250        | 103.162                | 100.007              | N/A         | N/A            | 3.155         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-19 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz |                       |

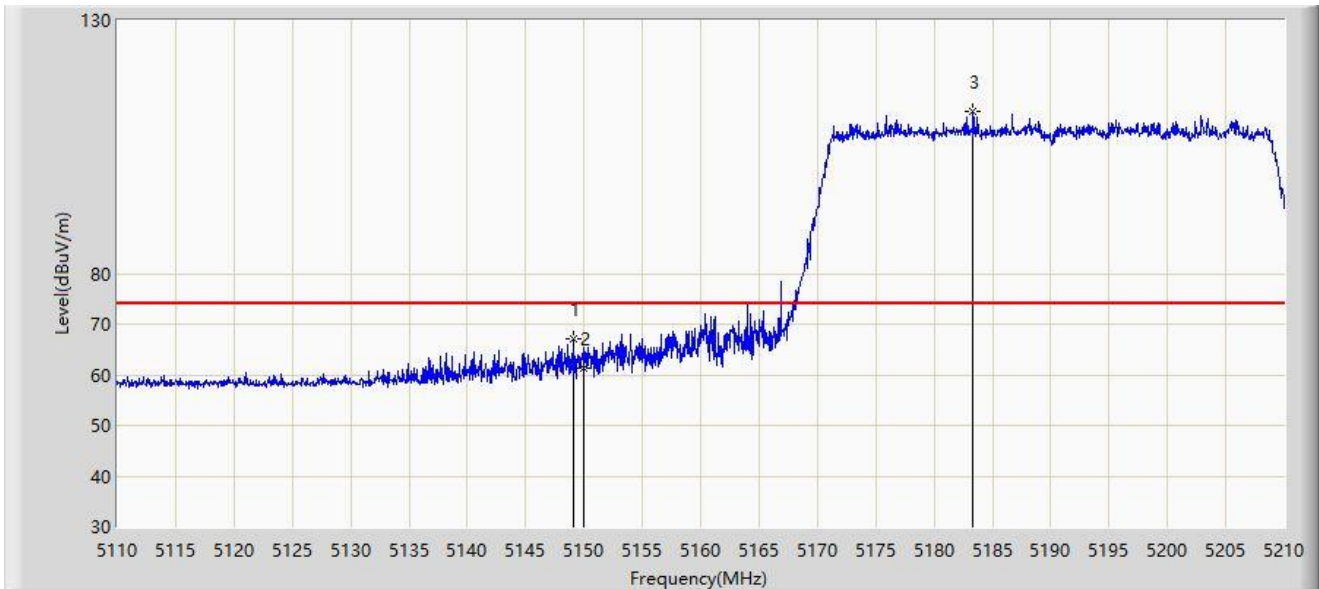


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.050        | 67.168                 | 63.689               | -6.832      | 74.000         | 3.479         | PK   |
| 2  |      | 5150.000        | 61.375                 | 57.893               | -12.625     | 74.000         | 3.482         | PK   |
| 3  |      | 5183.350        | 111.906                | 108.707              | N/A         | N/A            | 3.198         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-19 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5190MHz |                       |

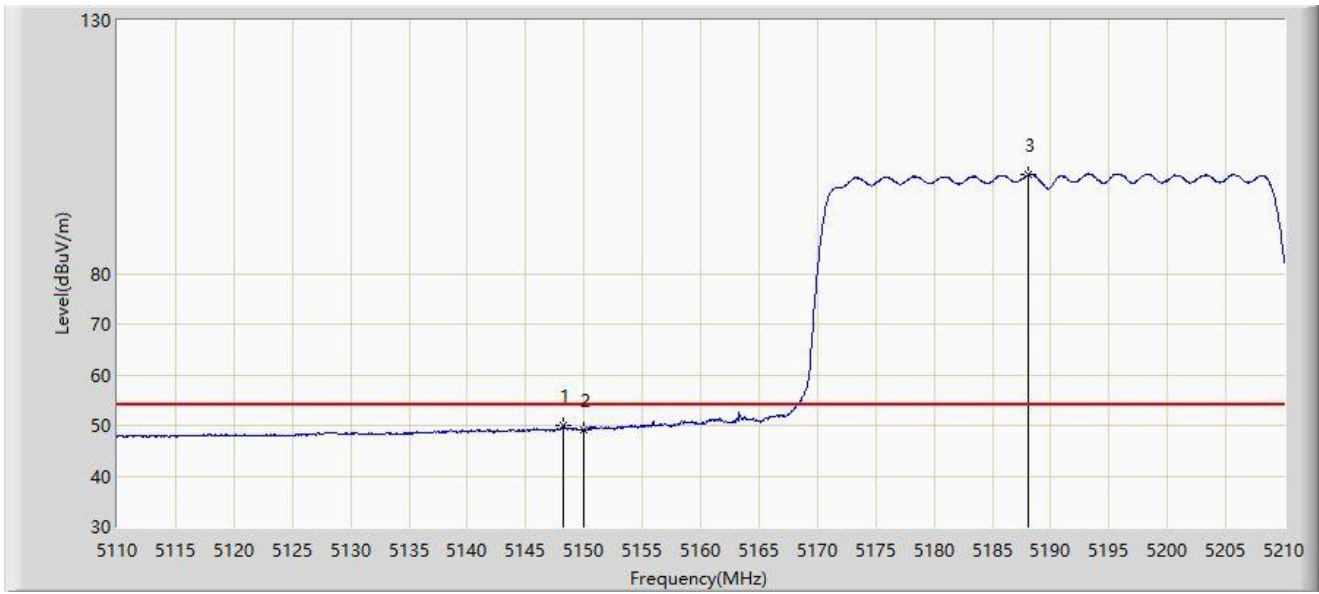


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5148.250        | 49.999                 | 46.523               | -4.001      | 54.000         | 3.476         | AV   |
| 2  |      | 5150.000        | 49.237                 | 45.755               | -4.763      | 54.000         | 3.482         | AV   |
| 3  |      | 5188.100        | 99.457                 | 96.367               | N/A         | N/A            | 3.090         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-19 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz |                       |

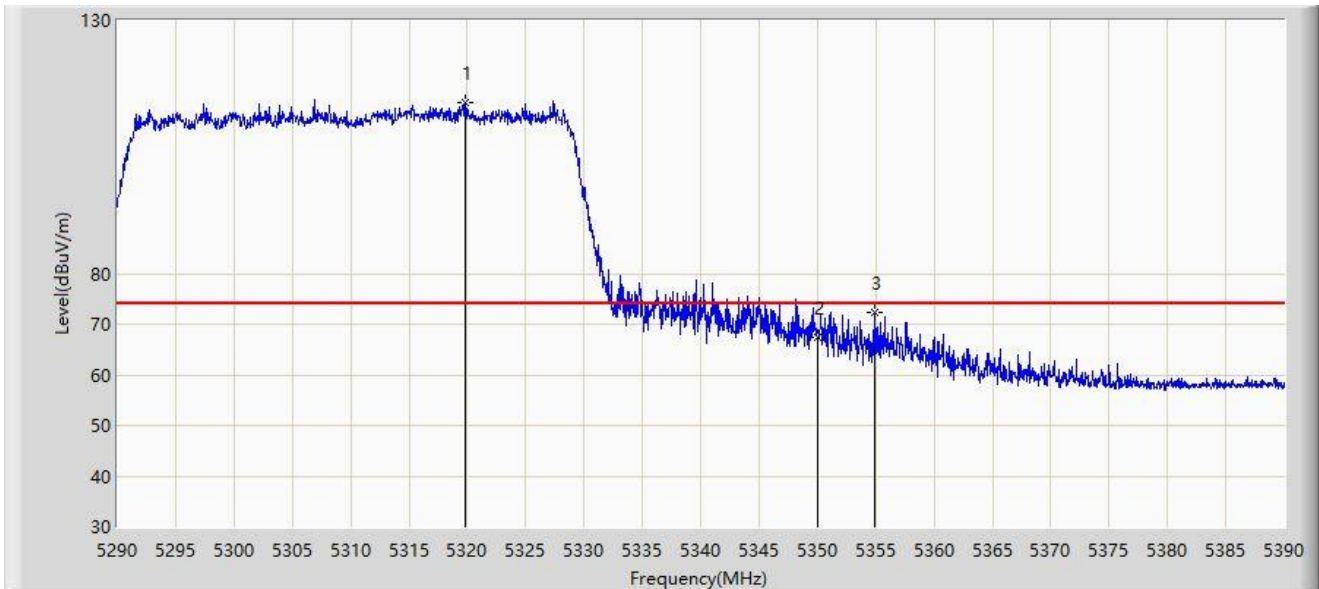


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5319.850        | 113.904                | 110.897              | N/A         | N/A            | 3.008         | PK   |
| 2  |      | 5350.000        | 67.367                 | 64.547               | -6.633      | 74.000         | 2.820         | PK   |
| 3  | *    | 5354.850        | 72.440                 | 69.641               | -1.560      | 74.000         | 2.799         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-19 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz |                       |

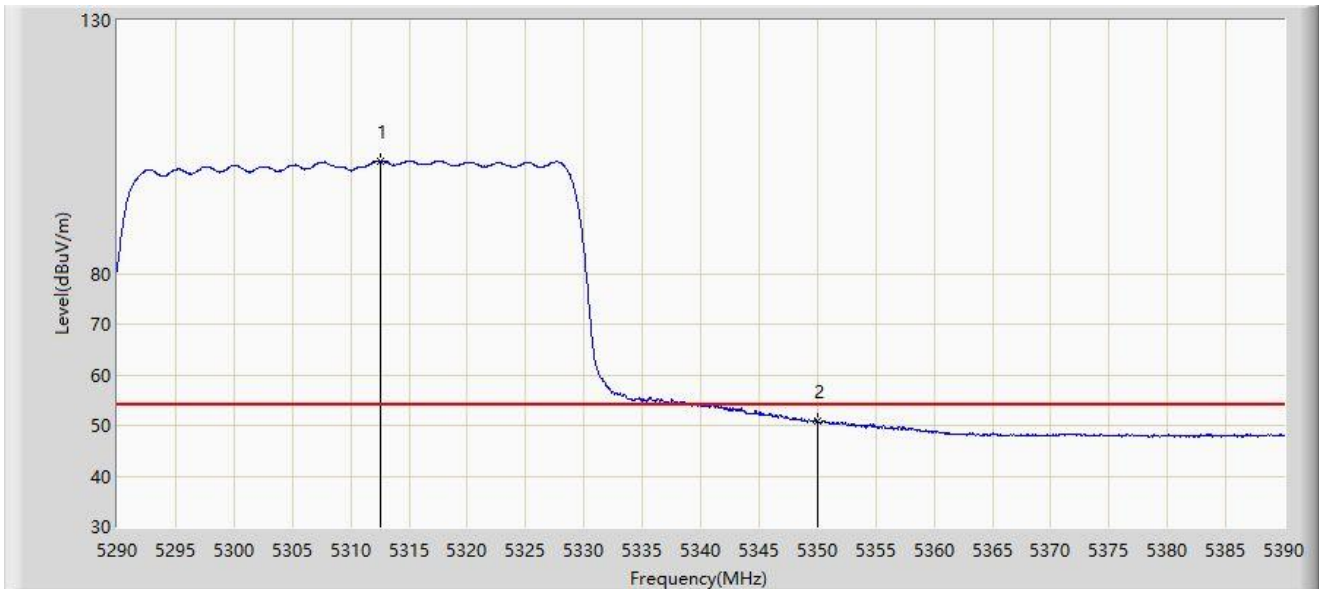


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5312.550        | 102.210                | 99.294               | N/A         | N/A            | 2.915         | AV   |
| 2  | *    | 5350.000        | 50.786                 | 47.966               | -3.214      | 54.000         | 2.820         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-19 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz |                       |

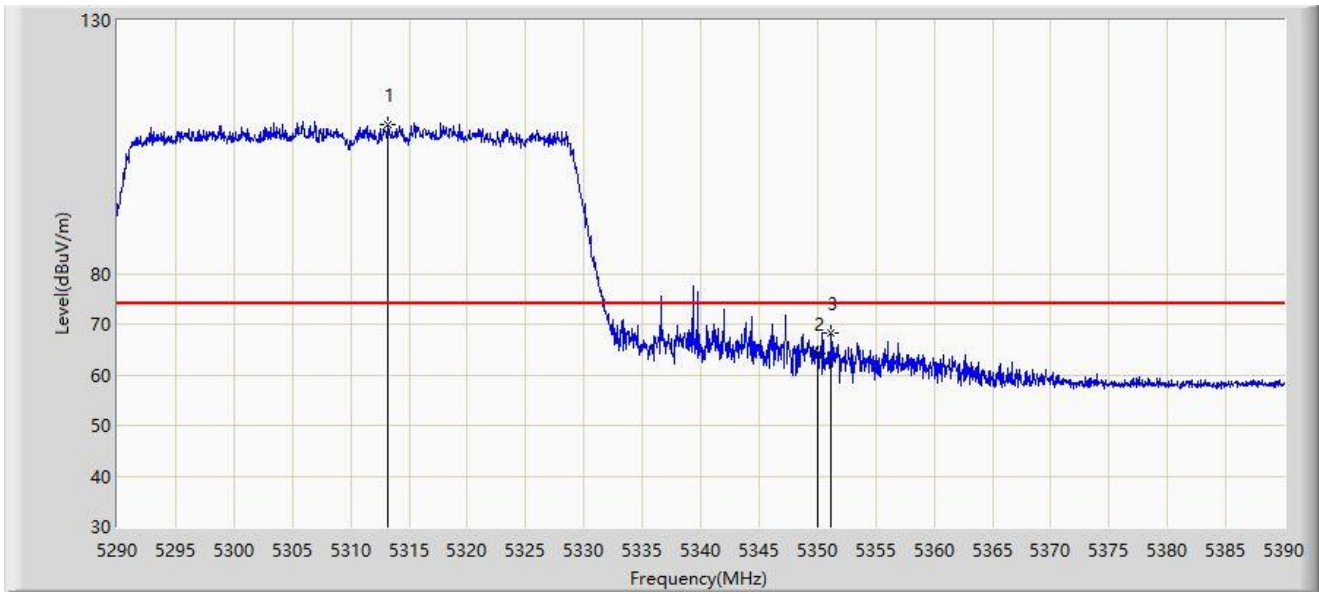


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5313.200        | 109.446                | 106.520              | N/A         | N/A            | 2.926         | PK   |
| 2  |      | 5350.000        | 64.336                 | 61.516               | -9.664      | 74.000         | 2.820         | PK   |
| 3  | *    | 5351.200        | 68.179                 | 65.379               | -5.821      | 74.000         | 2.800         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-19 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5310MHz |                       |

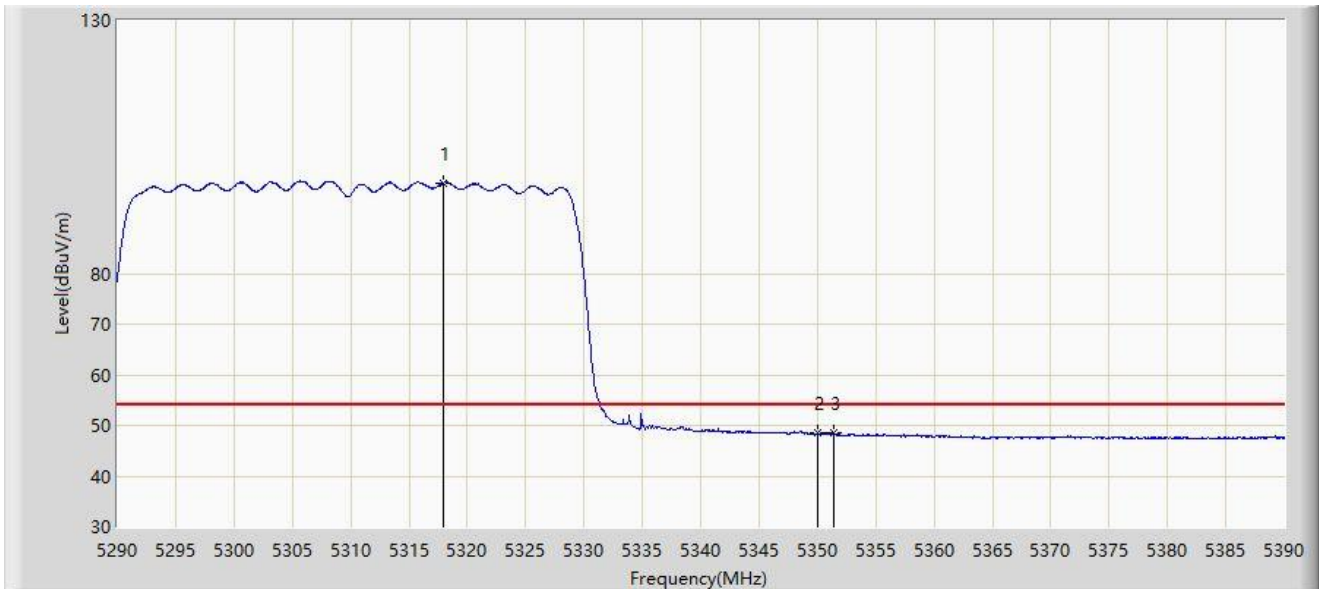


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5317.950        | 97.880                 | 94.871               | N/A         | N/A            | 3.010         | AV   |
| 2  |      | 5350.000        | 48.418                 | 45.598               | -5.582      | 54.000         | 2.820         | AV   |
| 3  | *    | 5351.350        | 48.691                 | 45.894               | -5.309      | 54.000         | 2.797         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz |                       |

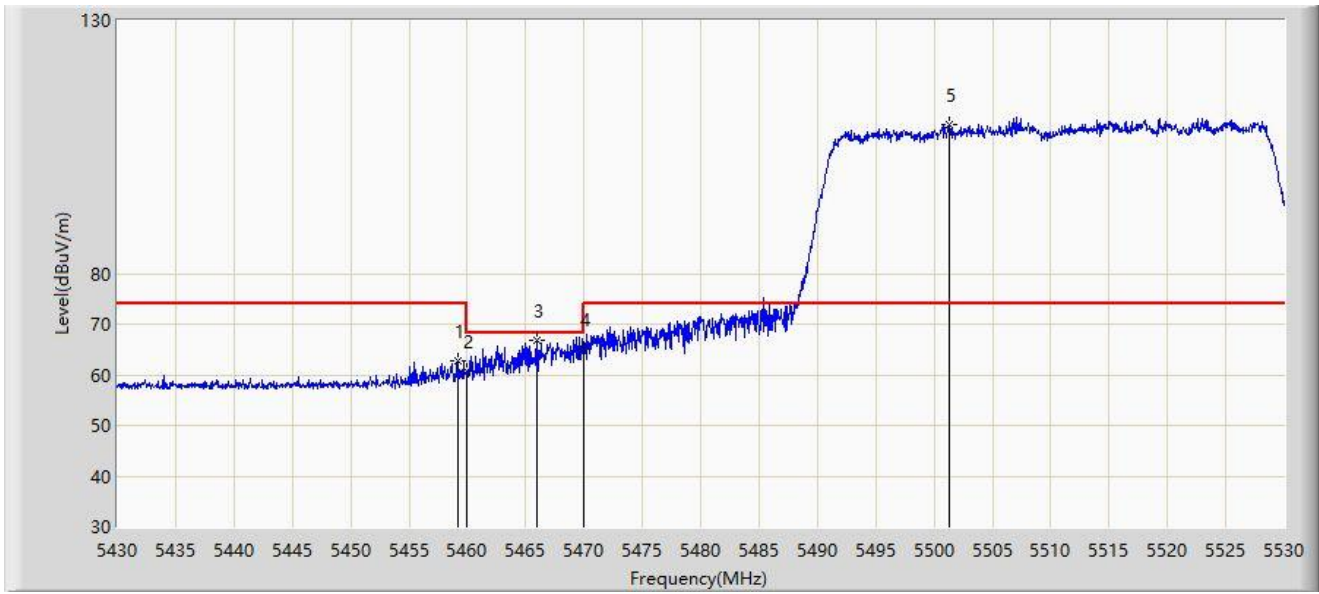


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5459.150        | 62.694                 | 59.561               | -11.306     | 74.000         | 3.132         | PK   |
| 2  |      | 5460.000        | 60.647                 | 57.498               | -13.353     | 74.000         | 3.149         | PK   |
| 3  | *    | 5465.950        | 66.883                 | 63.619               | -1.317      | 68.200         | 3.265         | PK   |
| 4  |      | 5470.000        | 65.203                 | 61.861               | -2.997      | 68.200         | 3.341         | PK   |
| 5  |      | 5501.250        | 109.506                | 106.329              | N/A         | N/A            | 3.177         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz |                       |

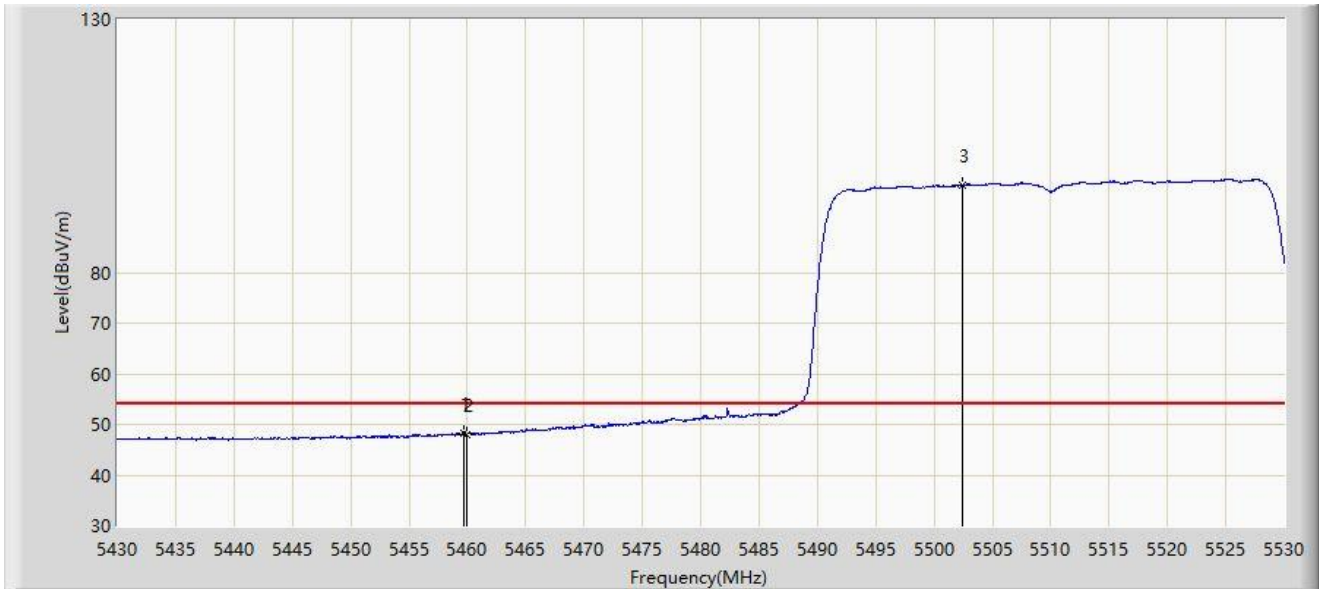


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5459.700        | 48.260                 | 45.117               | -5.740      | 54.000         | 3.143         | AV   |
| 2  |      | 5460.000        | 48.090                 | 44.941               | -5.910      | 54.000         | 3.149         | AV   |
| 3  |      | 5502.400        | 97.286                 | 94.117               | N/A         | N/A            | 3.169         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz |                       |

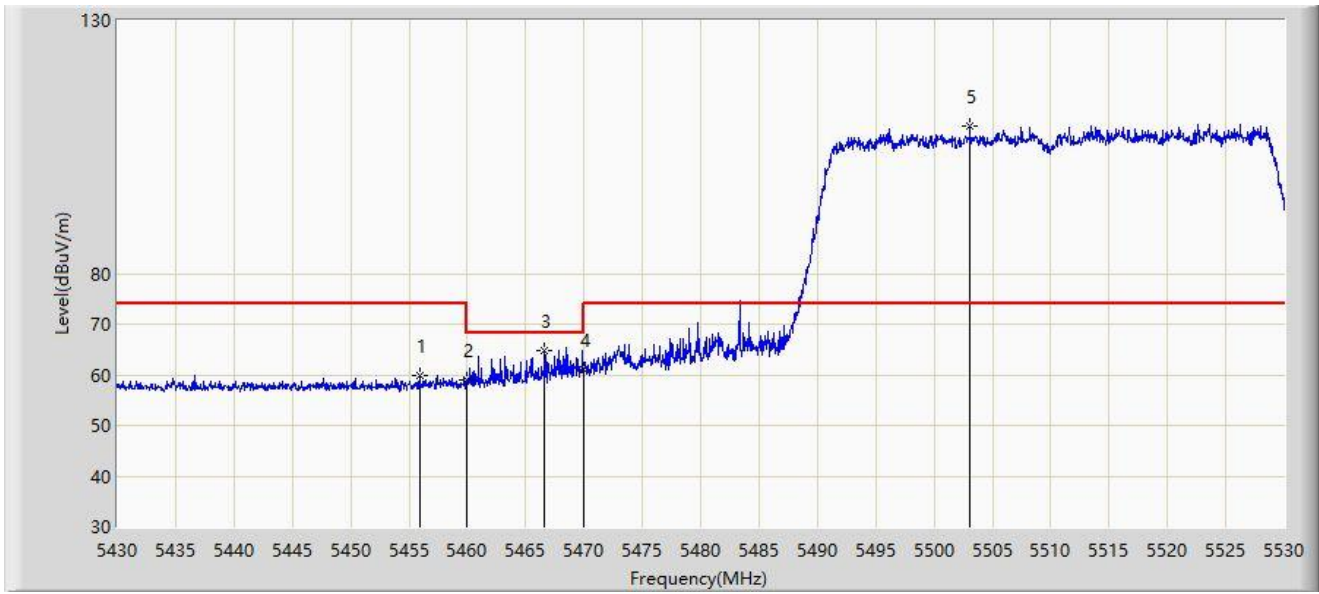


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5455.900        | 59.924                 | 56.850               | -14.076     | 74.000         | 3.074         | PK   |
| 2  |      | 5460.000        | 59.072                 | 55.923               | -14.928     | 74.000         | 3.149         | PK   |
| 3  | *    | 5466.650        | 64.823                 | 61.546               | -3.377      | 68.200         | 3.278         | PK   |
| 4  |      | 5470.000        | 60.992                 | 57.650               | -7.208      | 68.200         | 3.341         | PK   |
| 5  |      | 5503.050        | 109.001                | 105.837              | N/A         | N/A            | 3.165         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5510MHz |                       |

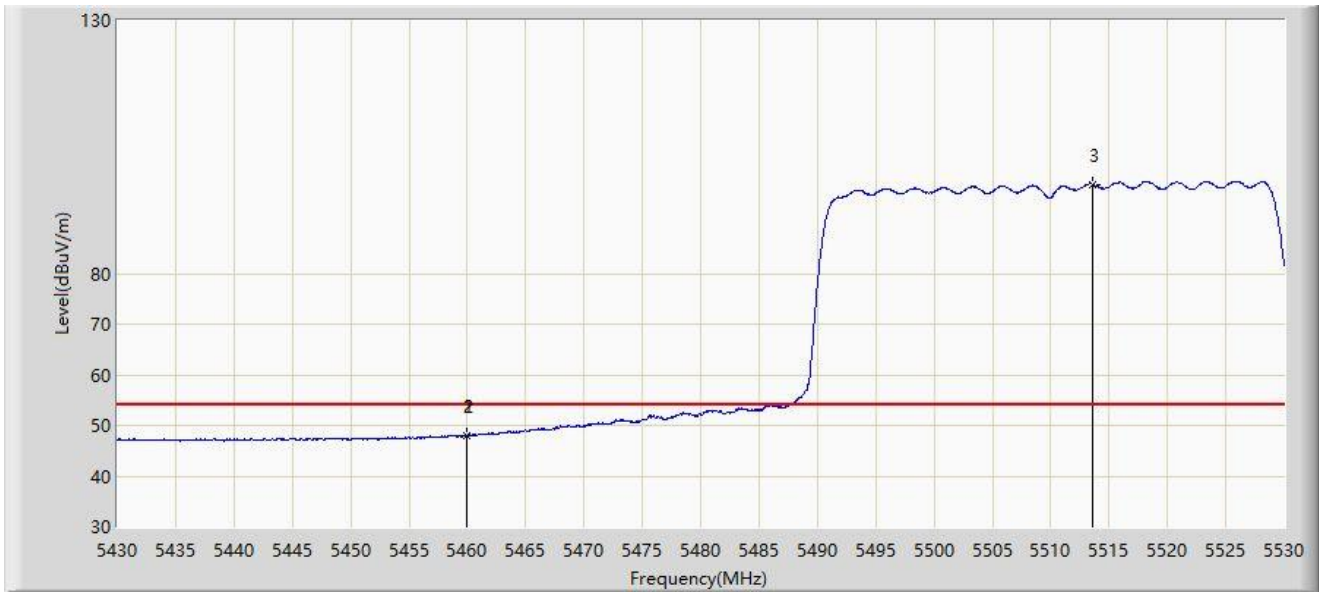


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5459.950        | 48.111                 | 44.963               | -5.889      | 54.000         | 3.148         | AV   |
| 2  |      | 5460.000        | 48.108                 | 44.959               | -5.892      | 54.000         | 3.149         | AV   |
| 3  |      | 5513.600        | 97.582                 | 94.505               | N/A         | N/A            | 3.078         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5670MHz |                       |

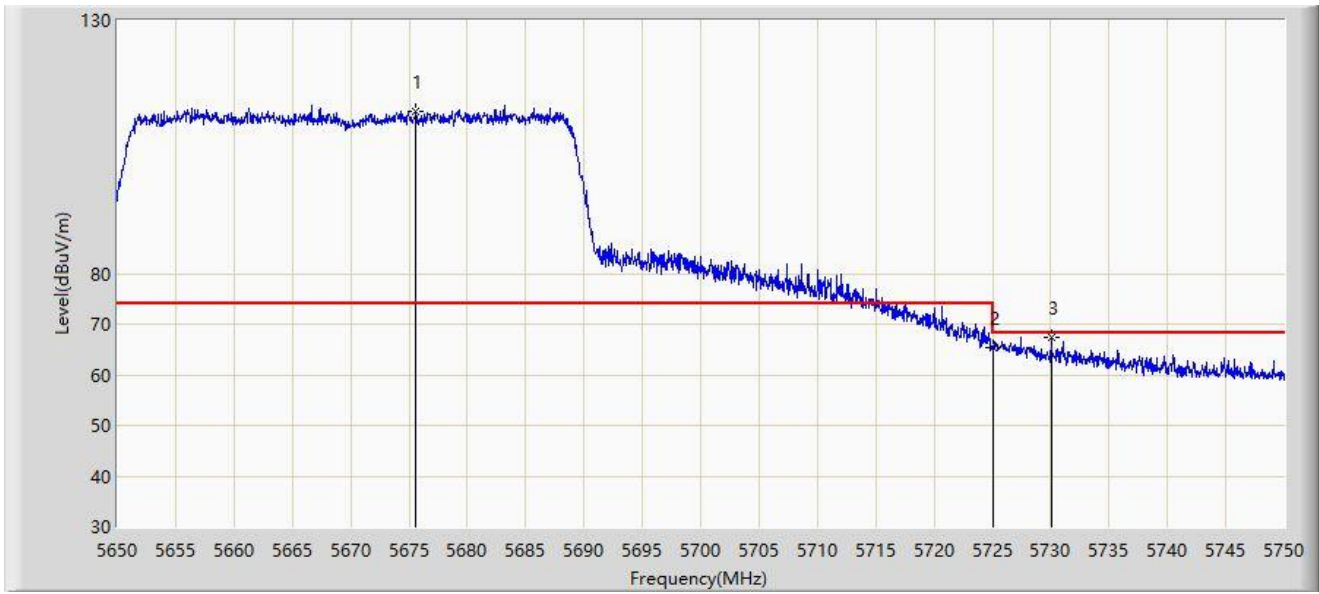


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5675.600        | 112.017                | 107.992              | N/A         | N/A            | 4.024         | PK   |
| 2  |      | 5725.000        | 65.234                 | 60.531               | -2.966      | 68.200         | 4.703         | PK   |
| 3  | *    | 5730.050        | 67.369                 | 62.726               | -0.831      | 68.200         | 4.643         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5670MHz |                       |

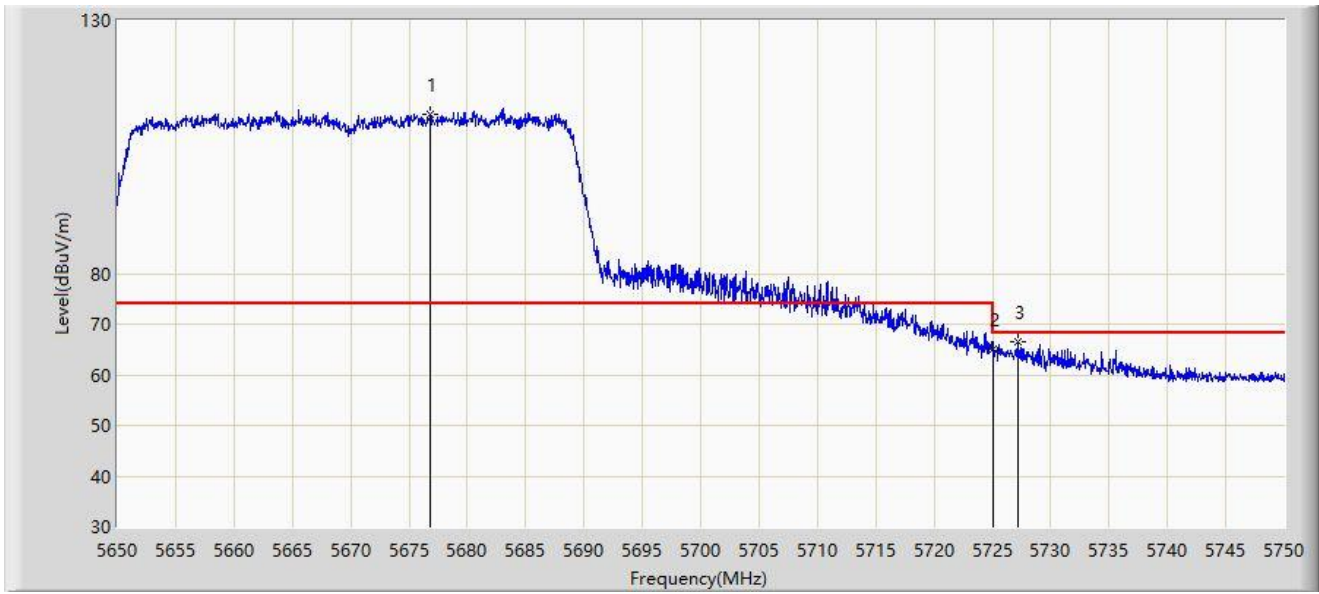


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5676.850        | 111.340                | 107.293              | N/A         | N/A            | 4.047         | PK   |
| 2  |      | 5725.000        | 64.986                 | 60.283               | -3.214      | 68.200         | 4.703         | PK   |
| 3  | *    | 5727.200        | 66.454                 | 61.760               | -1.746      | 68.200         | 4.693         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                          | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5755MHz |                       |

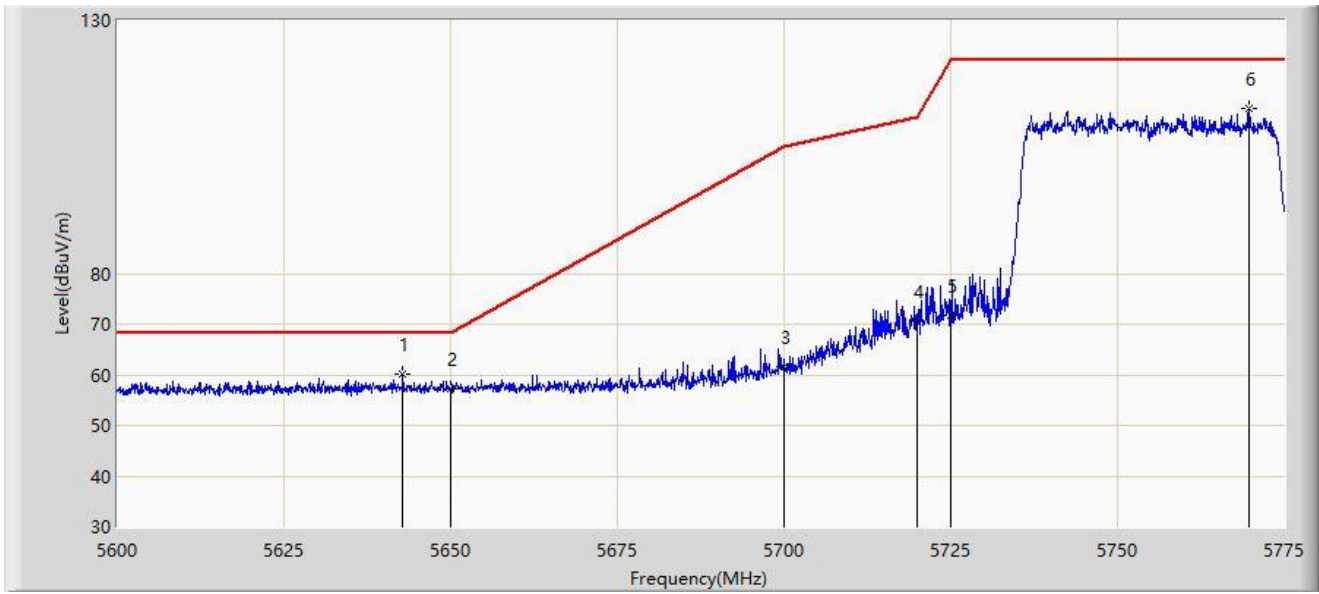


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5642.788        | 60.001                 | 55.843               | -8.199      | 68.200         | 4.158         | PK   |
| 2  |      | 5650.000        | 57.259                 | 53.136               | -10.941     | 68.200         | 4.122         | PK   |
| 3  |      | 5700.000        | 61.710                 | 57.273               | -43.490     | 105.200        | 4.437         | PK   |
| 4  |      | 5720.000        | 70.713                 | 66.049               | -40.087     | 110.800        | 4.663         | PK   |
| 5  |      | 5725.000        | 71.769                 | 67.066               | -50.431     | 122.200        | 4.703         | PK   |
| 6  |      | 5769.750        | 112.497                | 107.726              | N/A         | N/A            | 4.771         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                          | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5755MHz |                       |

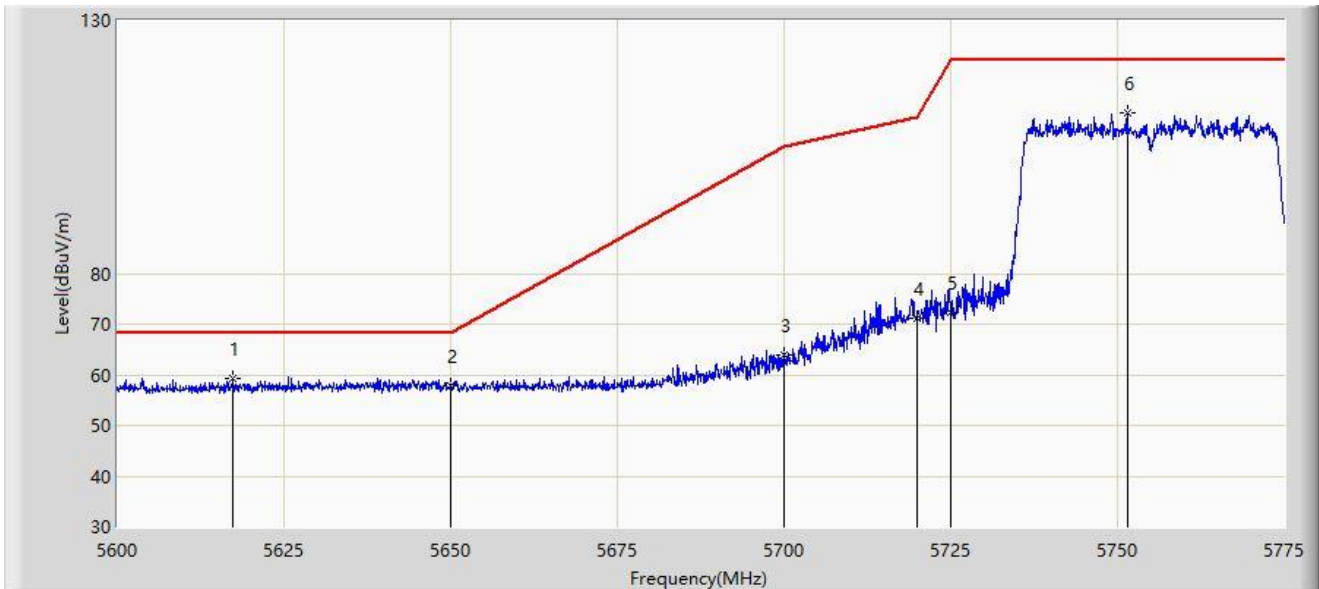


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5617.325        | 59.385                 | 55.607               | -8.815      | 68.200         | 3.779         | PK   |
| 2  |      | 5650.000        | 57.815                 | 53.692               | -10.385     | 68.200         | 4.122         | PK   |
| 3  |      | 5700.000        | 63.990                 | 59.553               | -41.210     | 105.200        | 4.437         | PK   |
| 4  |      | 5720.000        | 71.242                 | 66.578               | -39.558     | 110.800        | 4.663         | PK   |
| 5  |      | 5725.000        | 72.247                 | 67.544               | -49.953     | 122.200        | 4.703         | PK   |
| 6  |      | 5751.462        | 111.694                | 107.196              | N/A         | N/A            | 4.497         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                          | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5795MHz |                       |

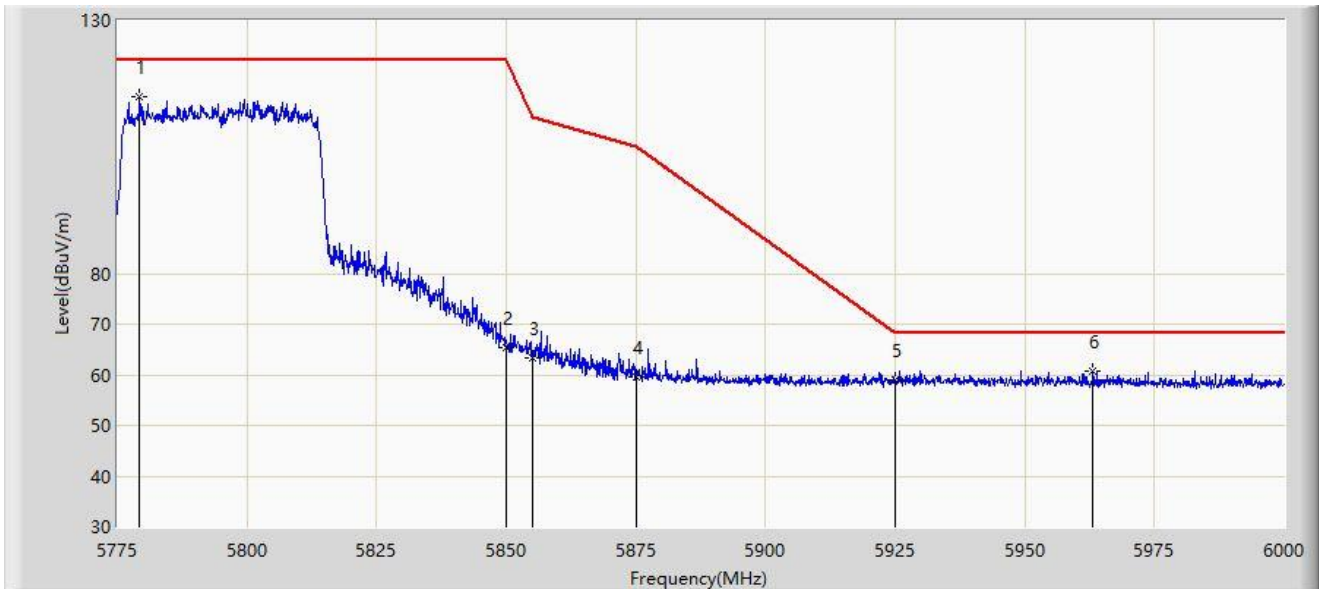


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5779.275        | 114.901                | 109.997              | N/A         | N/A            | 4.905         | PK   |
| 2  |      | 5850.000        | 65.342                 | 60.359               | -56.858     | 122.200        | 4.984         | PK   |
| 3  |      | 5855.000        | 63.232                 | 58.194               | -47.568     | 110.800        | 5.038         | PK   |
| 4  |      | 5875.000        | 59.541                 | 54.410               | -45.659     | 105.200        | 5.131         | PK   |
| 5  |      | 5925.000        | 58.882                 | 53.647               | -9.318      | 68.200         | 5.236         | PK   |
| 6  | *    | 5963.100        | 60.748                 | 55.381               | -7.452      | 68.200         | 5.367         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                          | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE40 at 5795MHz |                       |

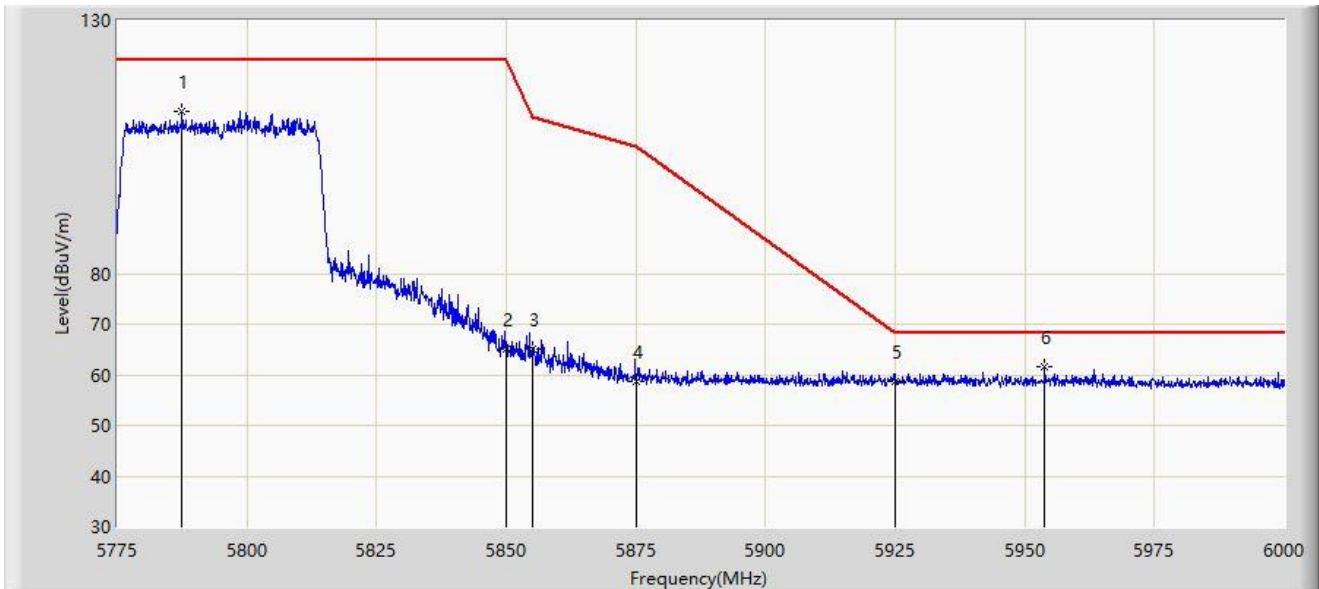


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5787.487        | 111.997                | 106.999              | N/A         | N/A            | 4.998         | PK   |
| 2  |      | 5850.000        | 65.190                 | 60.207               | -57.010     | 122.200        | 4.984         | PK   |
| 3  |      | 5855.000        | 65.198                 | 60.160               | -45.602     | 110.800        | 5.038         | PK   |
| 4  |      | 5875.000        | 58.671                 | 53.540               | -46.529     | 105.200        | 5.131         | PK   |
| 5  |      | 5925.000        | 58.659                 | 53.424               | -9.541      | 68.200         | 5.236         | PK   |
| 6  | *    | 5953.875        | 61.703                 | 56.332               | -6.497      | 68.200         | 5.371         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz |                       |

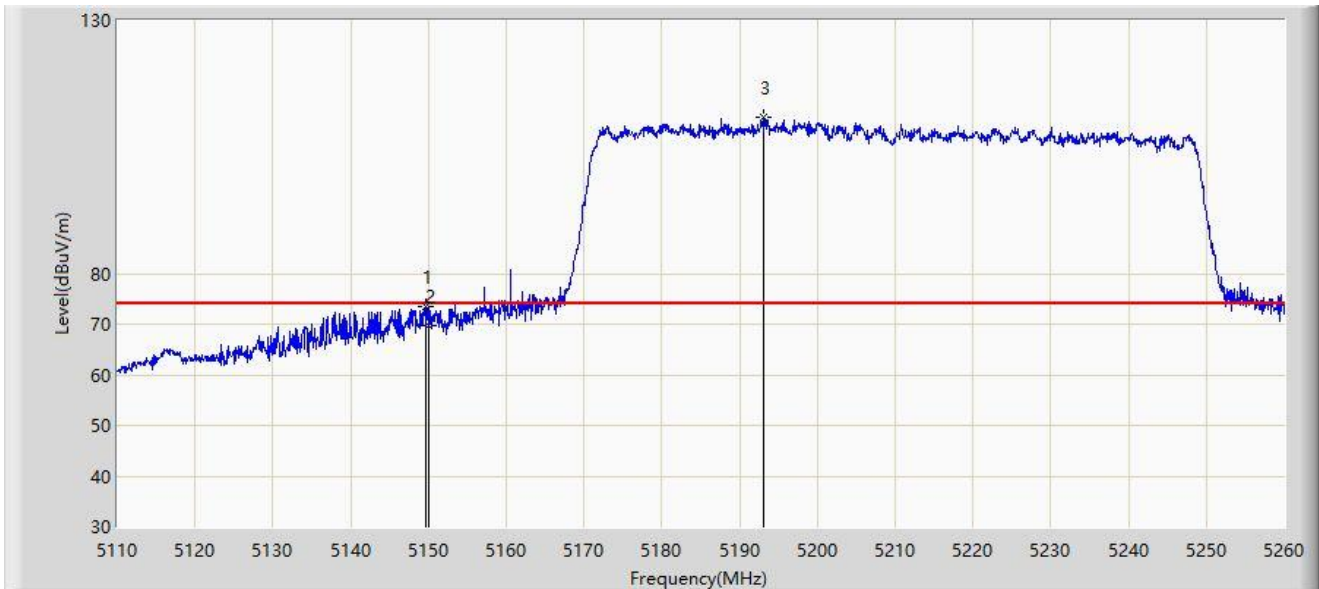


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.600        | 73.435                 | 69.955               | -0.565      | 74.000         | 3.480         | PK   |
| 2  |      | 5150.000        | 69.681                 | 66.199               | -4.319      | 74.000         | 3.482         | PK   |
| 3  |      | 5193.025        | 110.993                | 108.009              | N/A         | N/A            | 2.984         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz |                       |

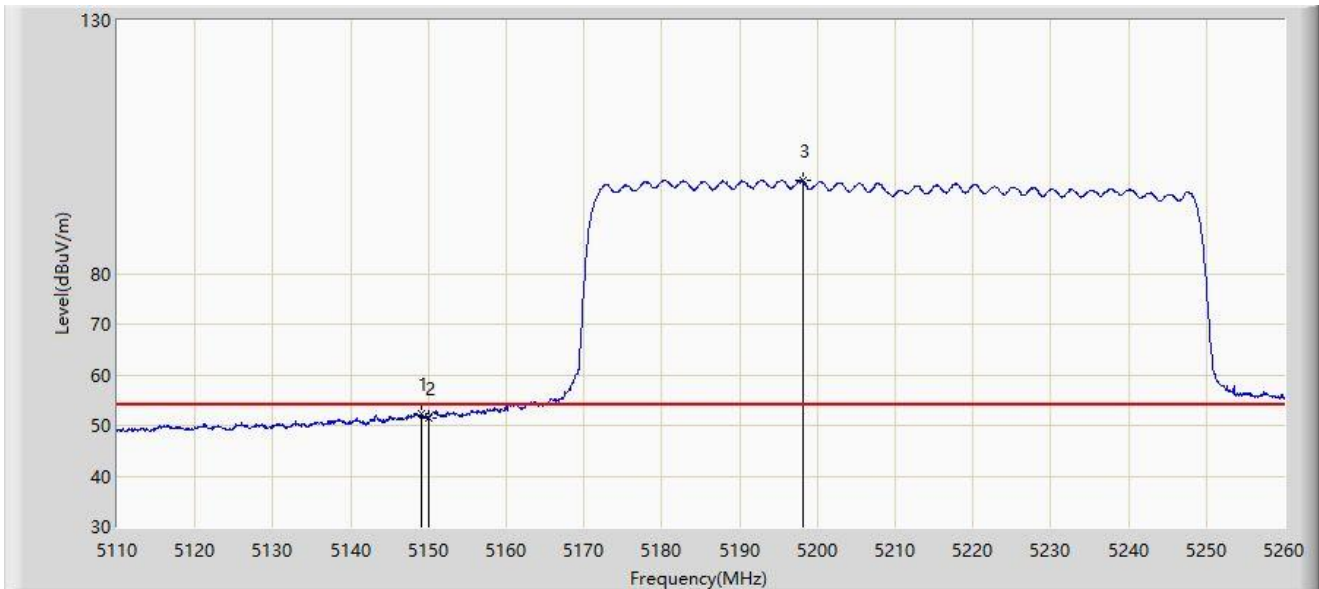


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.150        | 52.383                 | 48.904               | -1.617      | 54.000         | 3.479         | AV   |
| 2  |      | 5150.000        | 51.576                 | 48.094               | -2.424      | 54.000         | 3.482         | AV   |
| 3  |      | 5198.125        | 98.344                 | 95.471               | N/A         | N/A            | 2.873         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz |                       |

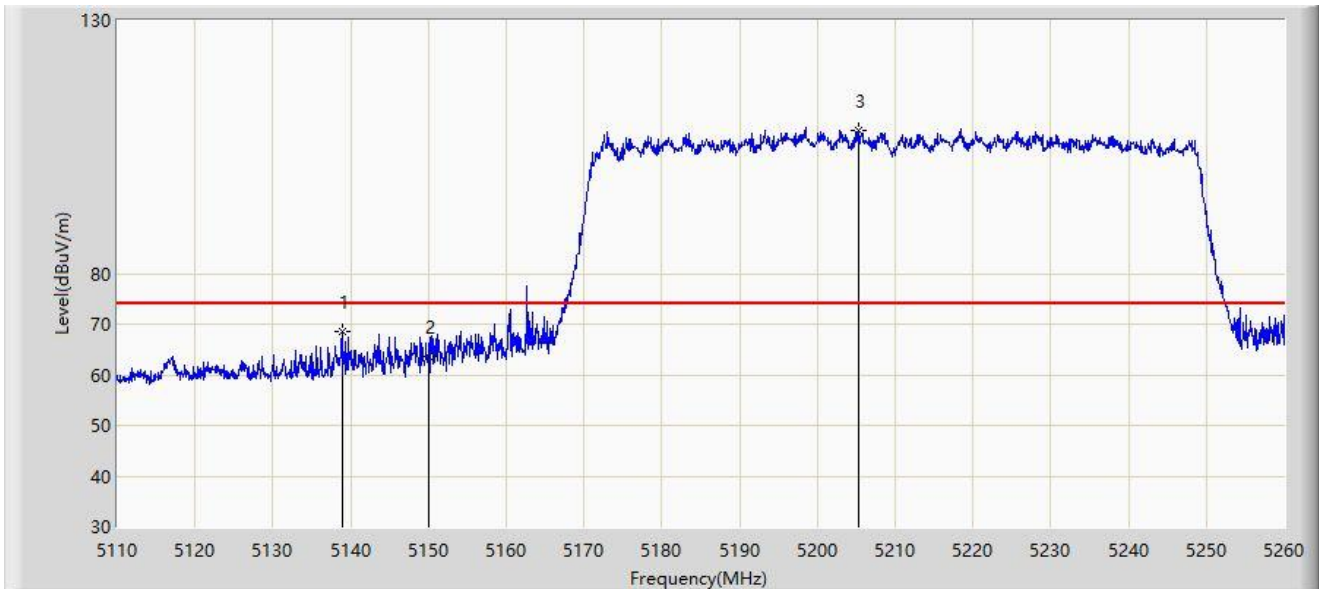


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5138.950        | 68.510                 | 65.149               | -5.490      | 74.000         | 3.361         | PK   |
| 2  |      | 5150.000        | 63.630                 | 60.148               | -10.370     | 74.000         | 3.482         | PK   |
| 3  |      | 5205.325        | 108.291                | 105.412              | N/A         | N/A            | 2.879         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5210MHz |                       |

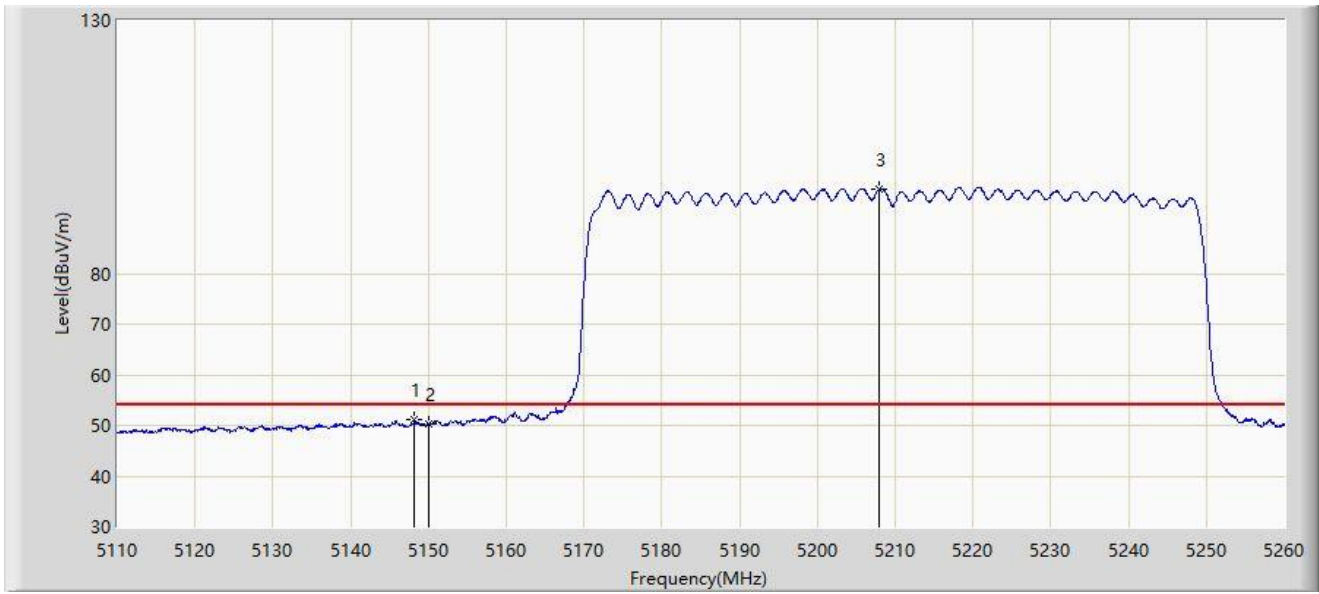


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5148.175        | 51.232                 | 47.756               | -2.768      | 54.000         | 3.475         | AV   |
| 2  |      | 5150.000        | 50.197                 | 46.715               | -3.803      | 54.000         | 3.482         | AV   |
| 3  |      | 5208.025        | 96.695                 | 93.806               | N/A         | N/A            | 2.890         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz |                       |

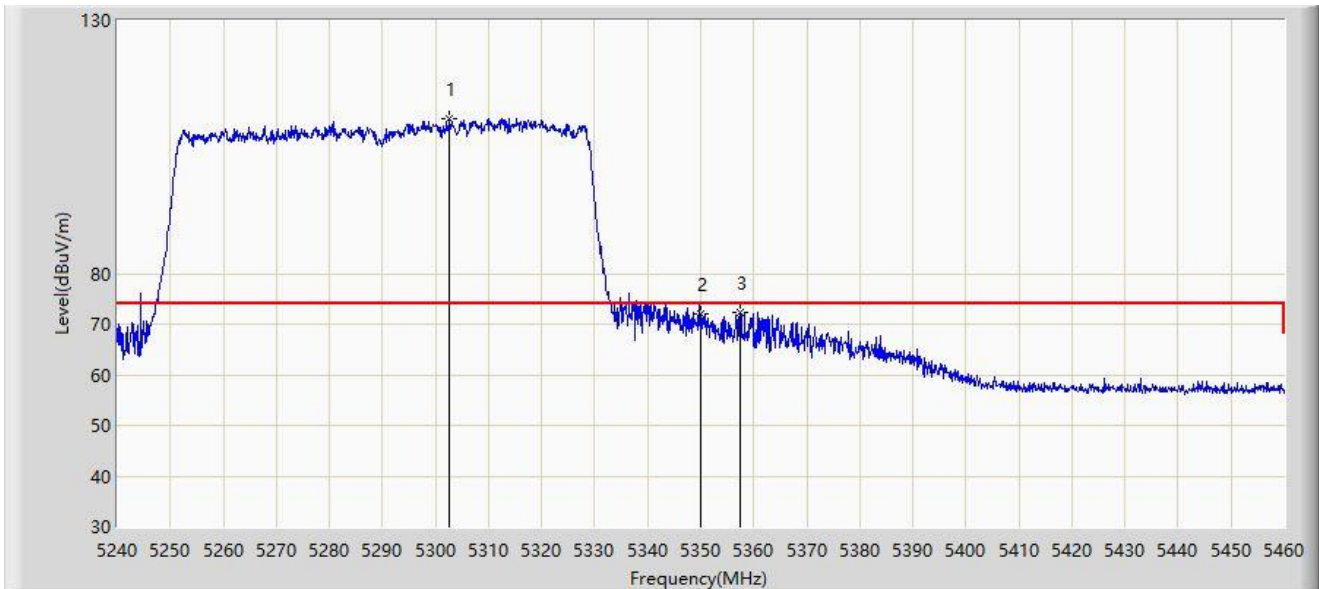


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5302.700        | 110.603                | 107.840              | N/A         | N/A            | 2.762         | PK   |
| 2  |      | 5350.000        | 72.151                 | 69.331               | -1.849      | 74.000         | 2.820         | PK   |
| 3  | *    | 5357.370        | 72.363                 | 69.553               | -1.637      | 74.000         | 2.810         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz |                       |

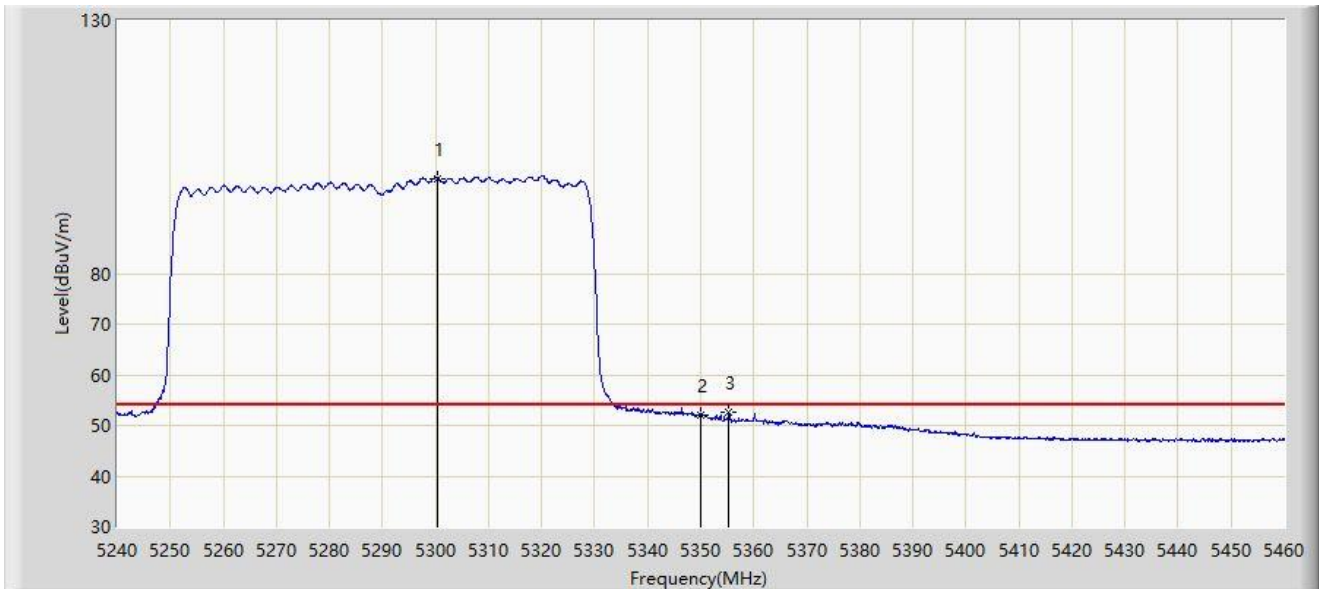


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5300.390        | 98.832                 | 96.102               | N/A         | N/A            | 2.730         | AV   |
| 2  |      | 5350.000        | 52.164                 | 49.344               | -1.836      | 54.000         | 2.820         | AV   |
| 3  | *    | 5355.280        | 52.740                 | 49.939               | -1.260      | 54.000         | 2.800         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz |                       |

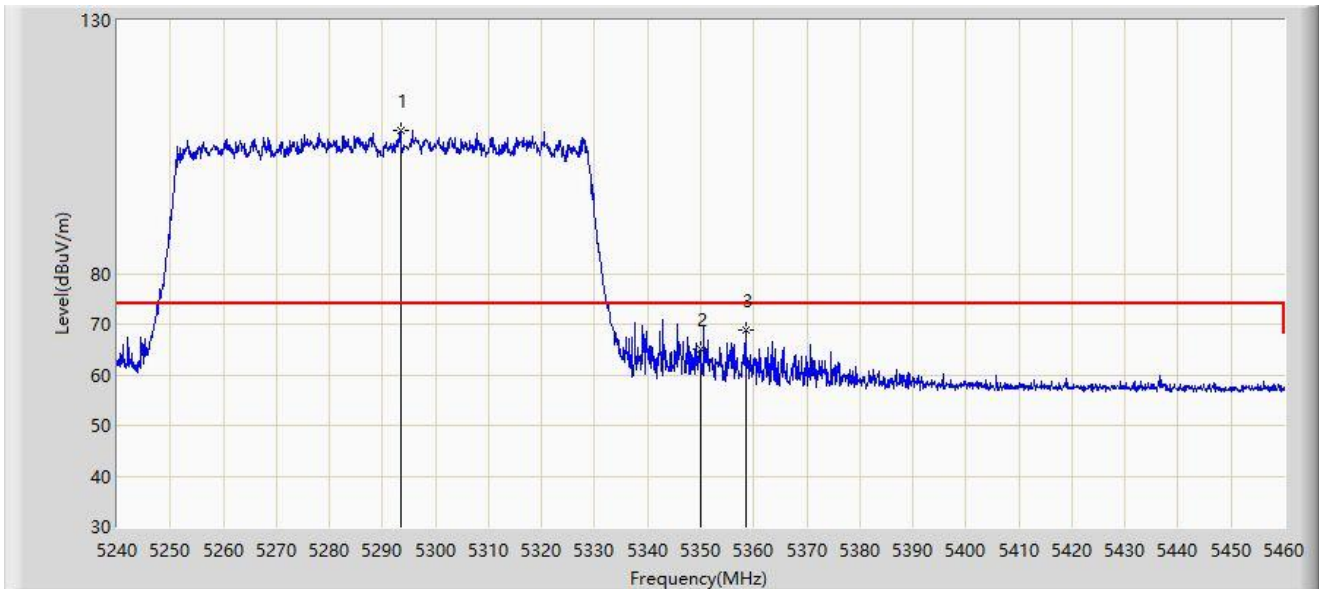


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5293.350        | 108.260                | 105.613              | N/A         | N/A            | 2.647         | PK   |
| 2  |      | 5350.000        | 65.006                 | 62.186               | -8.994      | 74.000         | 2.820         | PK   |
| 3  | *    | 5358.470        | 68.728                 | 65.913               | -5.272      | 74.000         | 2.815         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5290MHz |                       |

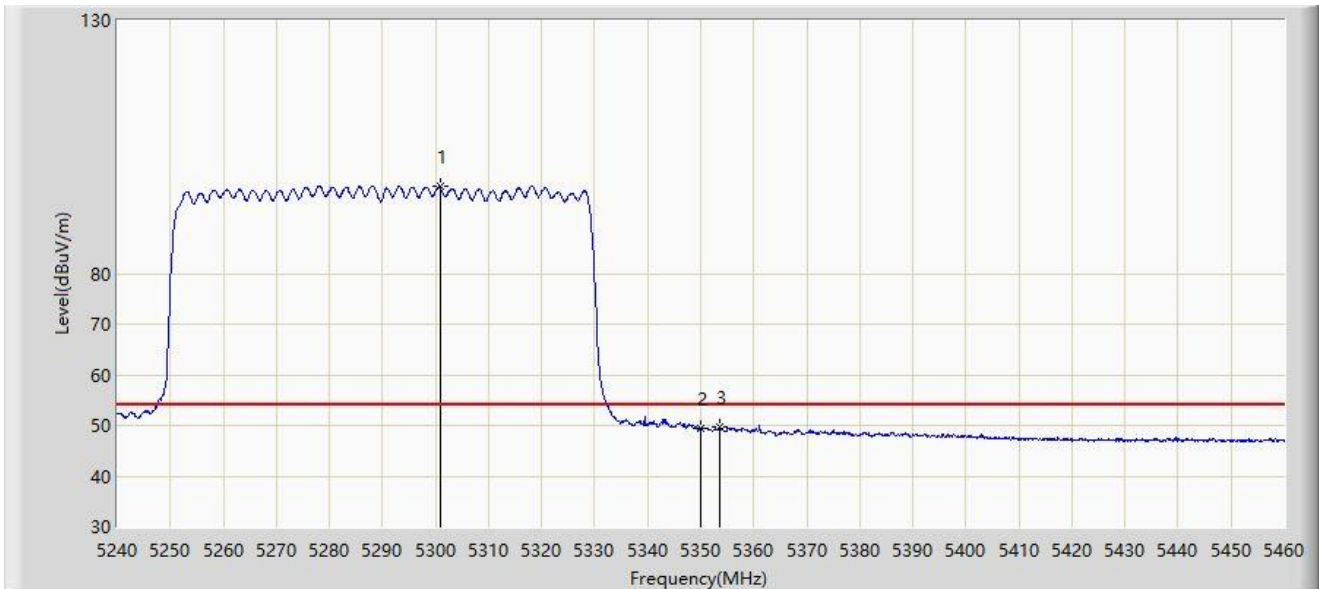


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5300.830        | 97.200                 | 94.465               | N/A         | N/A            | 2.735         | AV   |
| 2  |      | 5350.000        | 49.466                 | 46.646               | -4.534      | 54.000         | 2.820         | AV   |
| 3  | *    | 5353.520        | 49.765                 | 46.972               | -4.235      | 54.000         | 2.793         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz |                       |

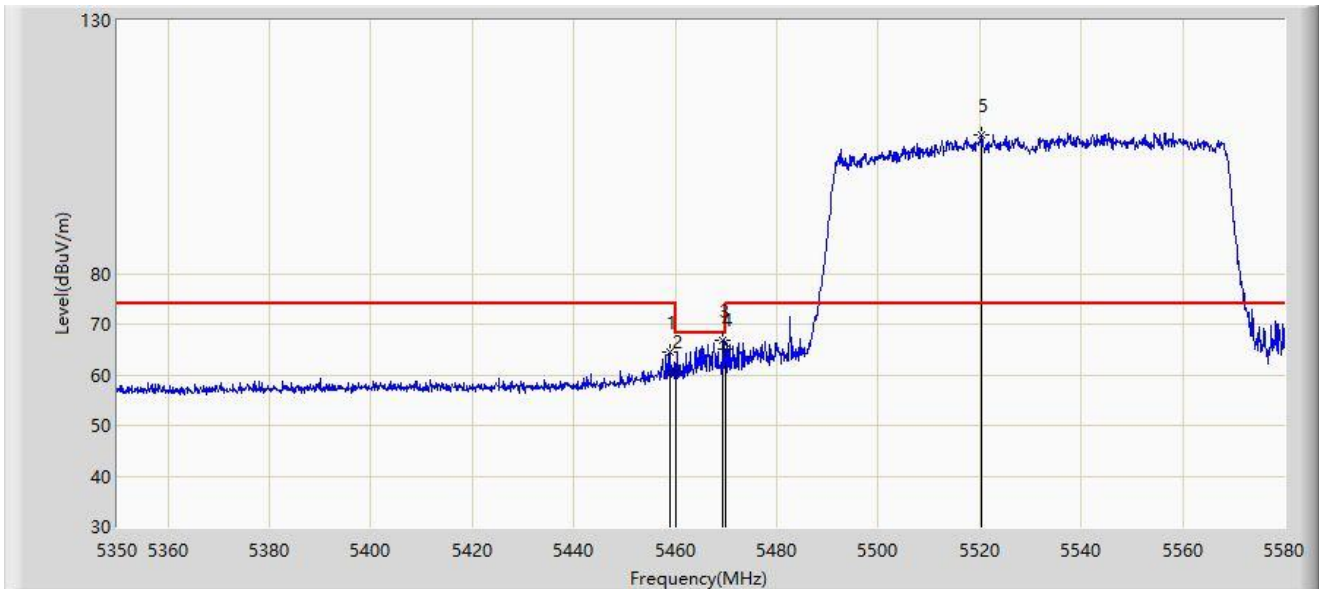


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5459.020        | 64.525                 | 61.395               | -9.475      | 74.000         | 3.130         | PK   |
| 2  |      | 5460.000        | 60.753                 | 57.604               | -13.247     | 74.000         | 3.149         | PK   |
| 3  | *    | 5469.370        | 66.908                 | 63.578               | -1.292      | 68.200         | 3.330         | PK   |
| 4  |      | 5470.000        | 65.004                 | 61.662               | -3.196      | 68.200         | 3.341         | PK   |
| 5  |      | 5520.430        | 107.442                | 104.396              | N/A         | N/A            | 3.046         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz |                       |

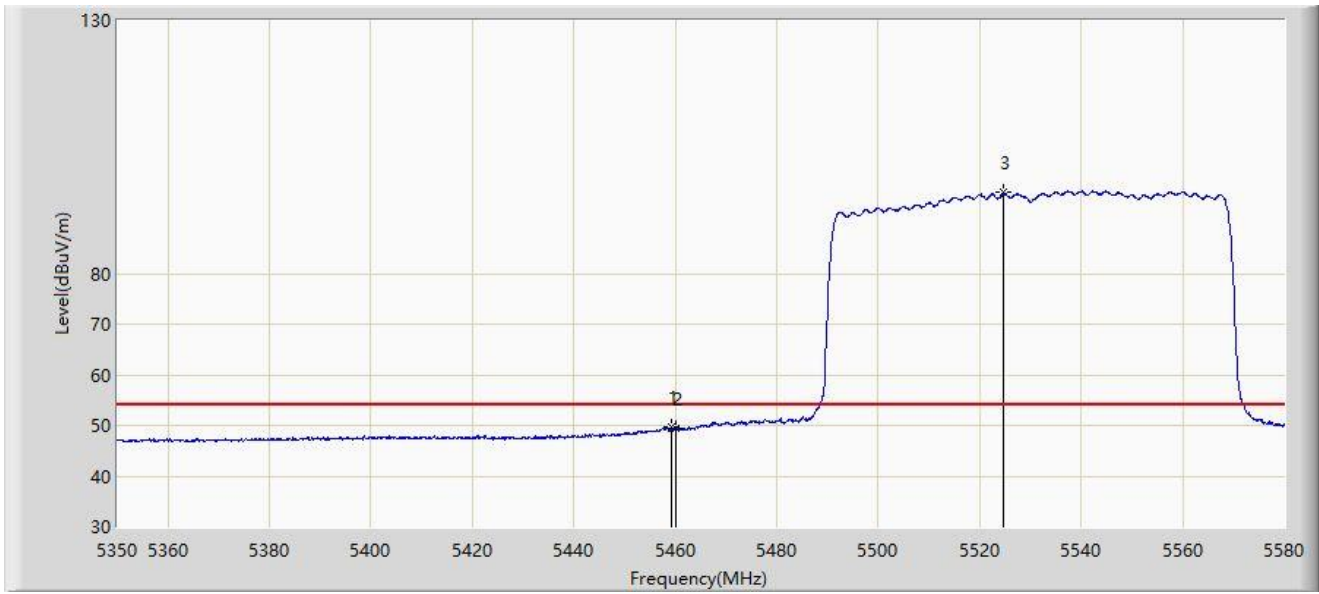


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5459.135        | 49.773                 | 46.641               | -4.227      | 54.000         | 3.132         | AV   |
| 2  |      | 5460.000        | 49.398                 | 46.249               | -4.602      | 54.000         | 3.149         | AV   |
| 3  |      | 5524.800        | 96.007                 | 92.907               | N/A         | N/A            | 3.100         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz |                       |

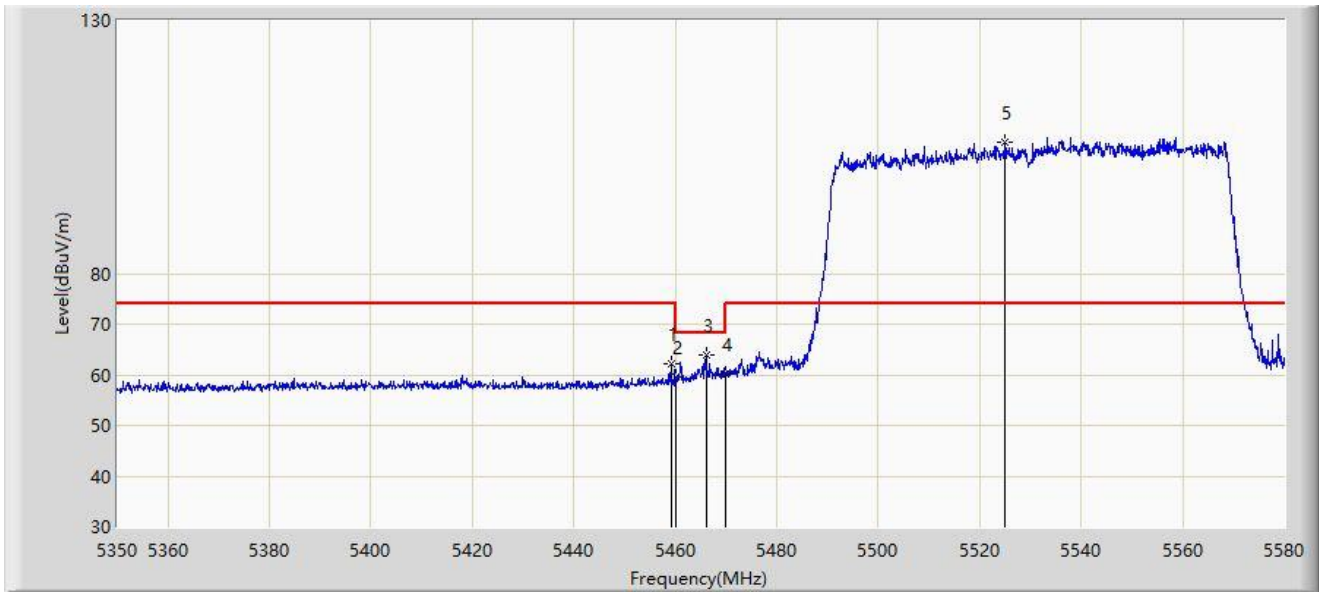


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5459.135        | 62.178                 | 59.046               | -11.822     | 74.000         | 3.132         | PK   |
| 2  |      | 5460.000        | 59.586                 | 56.437               | -14.414     | 74.000         | 3.149         | PK   |
| 3  | *    | 5466.035        | 63.954                 | 60.689               | -4.246      | 68.200         | 3.266         | PK   |
| 4  |      | 5470.000        | 60.284                 | 56.942               | -7.916      | 68.200         | 3.341         | PK   |
| 5  |      | 5525.030        | 105.995                | 102.890              | N/A         | N/A            | 3.105         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5530MHz |                       |

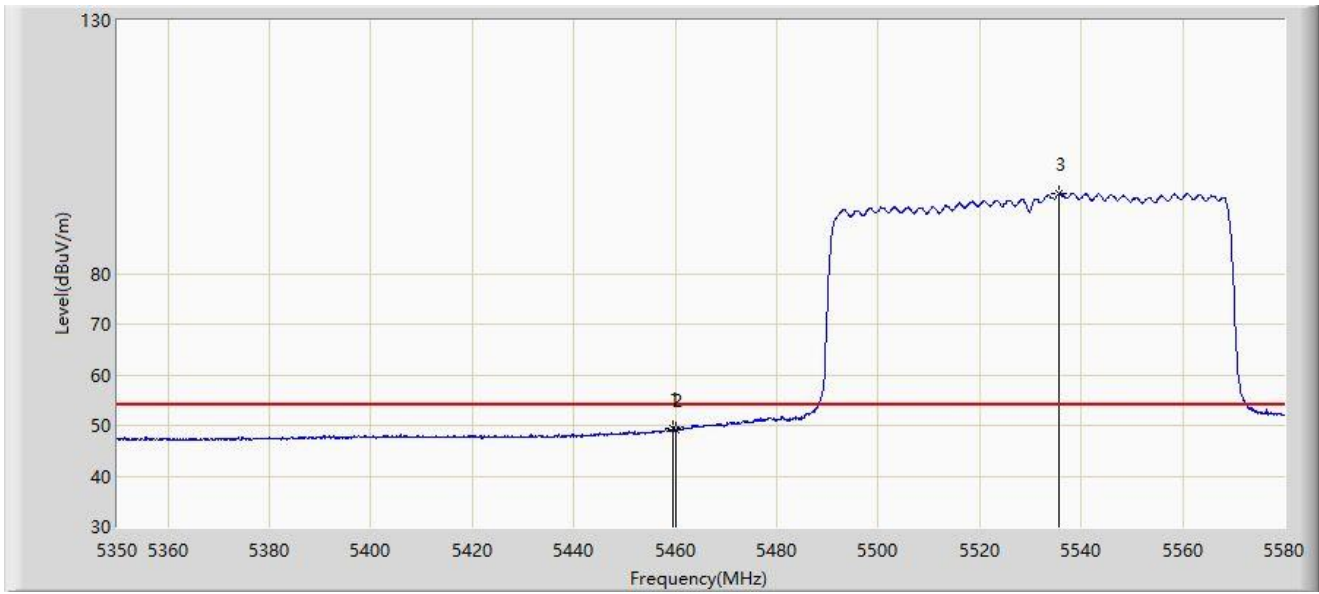


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5459.595        | 49.307                 | 46.166               | -4.693      | 54.000         | 3.141         | AV   |
| 2  |      | 5460.000        | 49.017                 | 45.868               | -4.983      | 54.000         | 3.149         | AV   |
| 3  |      | 5535.725        | 95.789                 | 92.514               | N/A         | N/A            | 3.274         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5610MHz |                       |

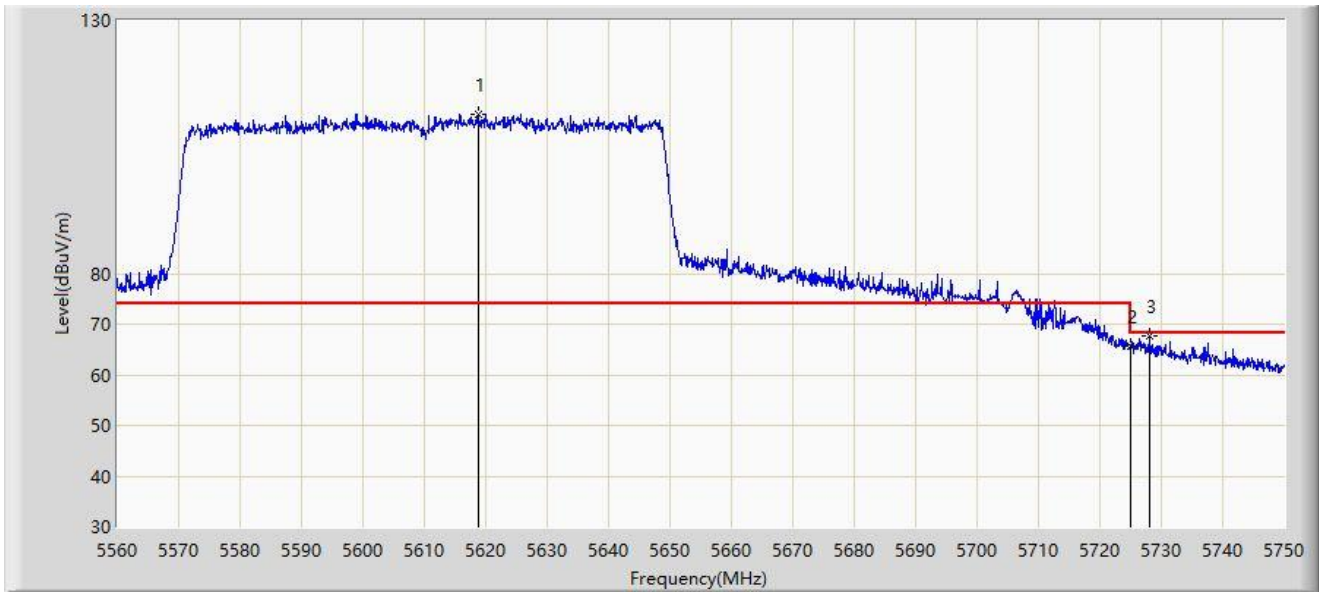


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5618.805        | 111.557                | 107.745              | N/A         | N/A            | 3.812         | PK   |
| 2  |      | 5725.000        | 65.662                 | 60.959               | -2.538      | 68.200         | 4.703         | PK   |
| 3  | *    | 5728.055        | 67.576                 | 62.897               | -0.624      | 68.200         | 4.679         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                            | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5610MHz |                       |

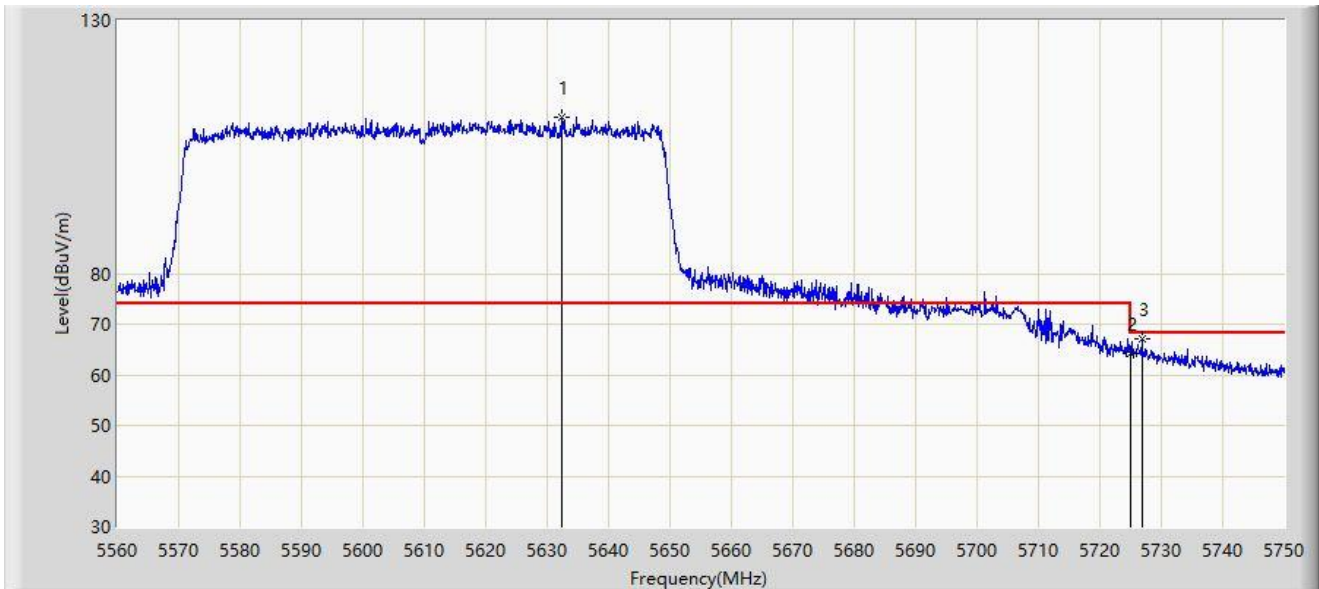


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5632.485        | 110.770                | 106.711              | N/A         | N/A            | 4.059         | PK   |
| 2  |      | 5725.000        | 64.098                 | 59.395               | -4.102      | 68.200         | 4.703         | PK   |
| 3  | *    | 5726.820        | 66.998                 | 62.297               | -1.202      | 68.200         | 4.701         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                          | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal  |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5775MHz |                       |

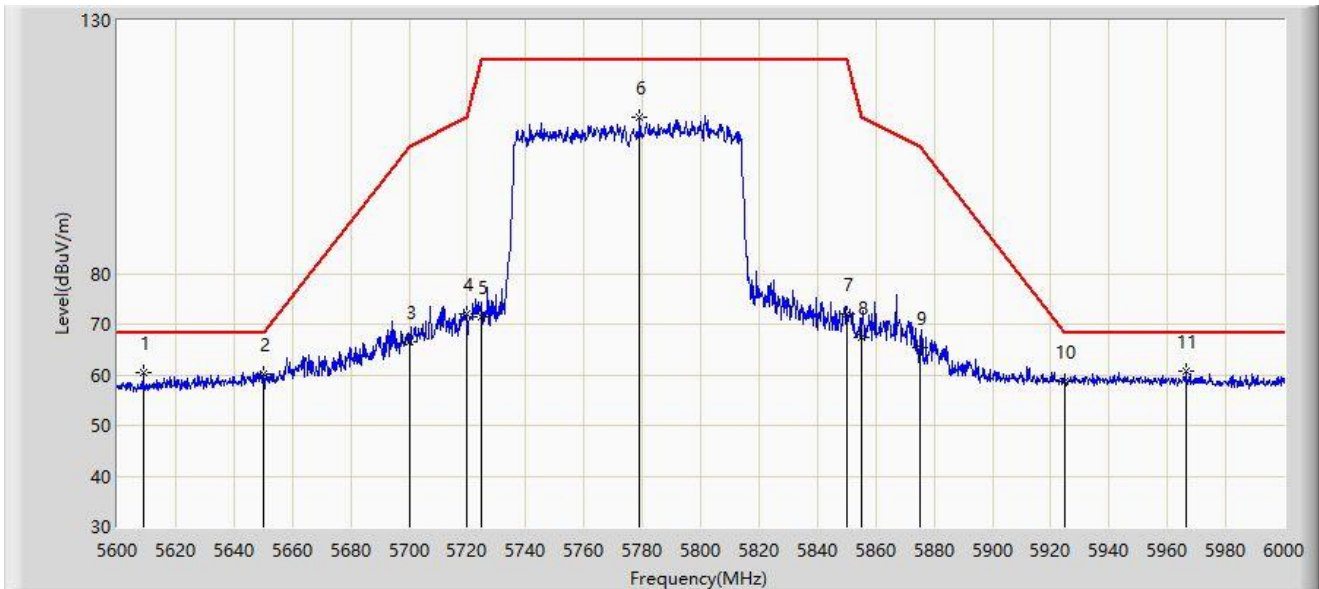


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5608.800        | 60.436                 | 56.845               | -7.764      | 68.200         | 3.590         | PK   |
| 2  |      | 5650.000        | 60.088                 | 55.965               | -8.112      | 68.200         | 4.122         | PK   |
| 3  |      | 5700.000        | 66.640                 | 62.203               | -38.560     | 105.200        | 4.437         | PK   |
| 4  |      | 5720.000        | 71.948                 | 67.284               | -38.852     | 110.800        | 4.663         | PK   |
| 5  |      | 5725.000        | 71.565                 | 66.862               | -50.635     | 122.200        | 4.703         | PK   |
| 6  |      | 5779.000        | 110.970                | 106.069              | N/A         | N/A            | 4.902         | PK   |
| 7  |      | 5850.000        | 71.906                 | 66.923               | -50.294     | 122.200        | 4.984         | PK   |
| 8  |      | 5855.000        | 67.357                 | 62.319               | -43.443     | 110.800        | 5.038         | PK   |
| 9  |      | 5875.000        | 65.396                 | 60.265               | -39.804     | 105.200        | 5.131         | PK   |
| 10 |      | 5925.000        | 58.726                 | 53.491               | -9.474      | 68.200         | 5.236         | PK   |
| 11 | *    | 5966.200        | 60.678                 | 55.338               | -7.522      | 68.200         | 5.340         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: WZ-AC2                                    | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                          | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical    |
| EUT: ACCESS POINT                               | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE80 at 5775MHz |                       |

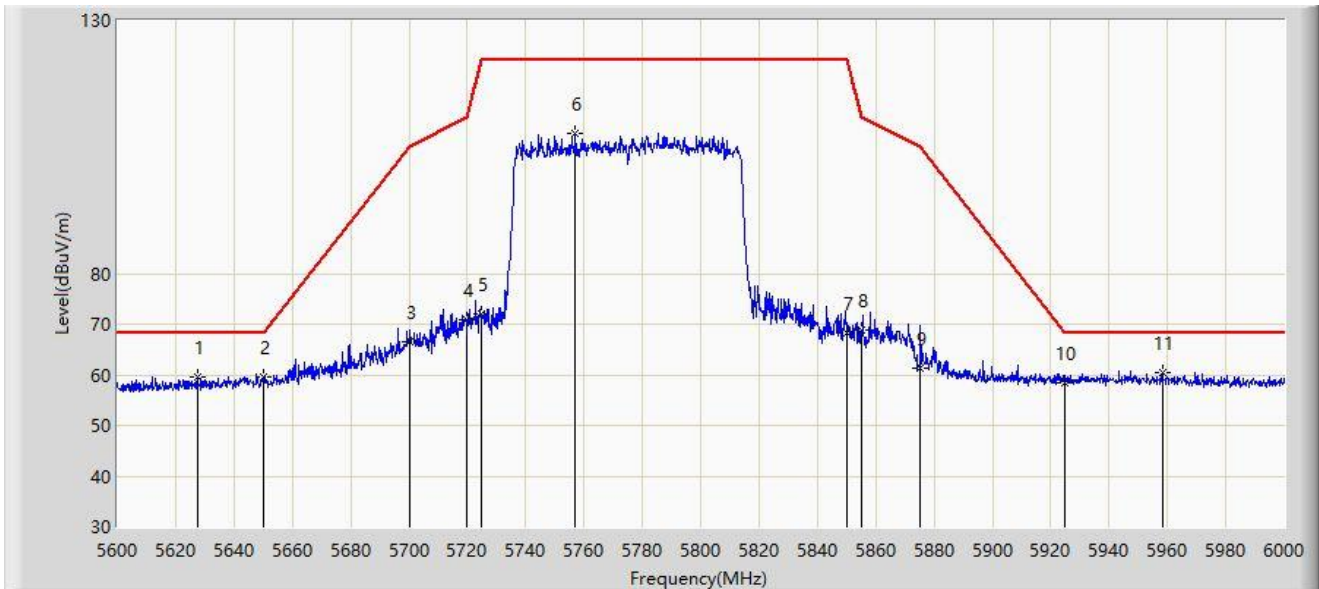


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5627.400        | 59.599                 | 55.602               | -8.601      | 68.200         | 3.997         | PK   |
| 2  |      | 5650.000        | 59.694                 | 55.571               | -8.506      | 68.200         | 4.122         | PK   |
| 3  |      | 5700.000        | 66.595                 | 62.158               | -38.605     | 105.200        | 4.437         | PK   |
| 4  |      | 5720.000        | 70.854                 | 66.190               | -39.946     | 110.800        | 4.663         | PK   |
| 5  |      | 5725.000        | 72.156                 | 67.453               | -50.044     | 122.200        | 4.703         | PK   |
| 6  |      | 5757.000        | 107.650                | 103.087              | N/A         | N/A            | 4.563         | PK   |
| 7  |      | 5850.000        | 68.374                 | 63.391               | -53.826     | 122.200        | 4.984         | PK   |
| 8  |      | 5855.000        | 68.753                 | 63.715               | -42.047     | 110.800        | 5.038         | PK   |
| 9  |      | 5875.000        | 61.420                 | 56.289               | -43.780     | 105.200        | 5.131         | PK   |
| 10 |      | 5925.000        | 58.361                 | 53.126               | -9.839      | 68.200         | 5.236         | PK   |
| 11 | *    | 5958.200        | 60.333                 | 54.946               | -7.867      | 68.200         | 5.386         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 5250MHz |                       |

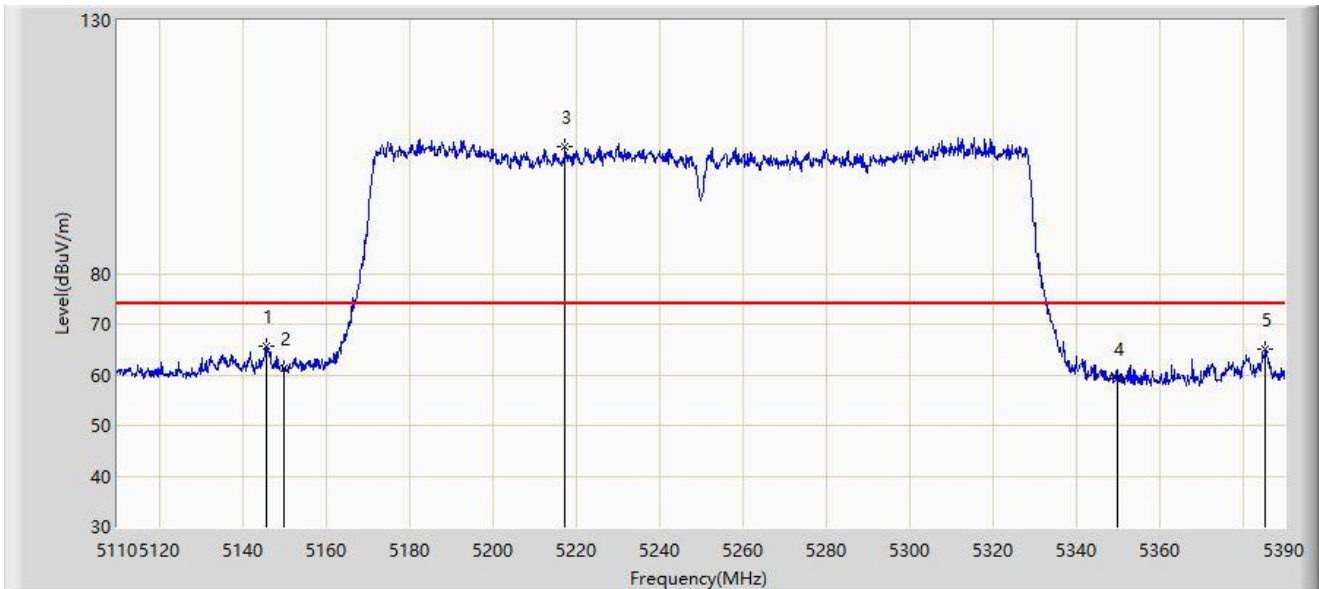


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5145.700        | 65.605                 | 62.158               | -8.395      | 74.000         | 3.446         | PK   |
| 2  |      | 5150.000        | 61.287                 | 57.805               | -12.713     | 74.000         | 3.482         | PK   |
| 3  |      | 5217.520        | 105.186                | 102.242              | N/A         | N/A            | 2.944         | PK   |
| 4  |      | 5350.000        | 59.354                 | 56.534               | -14.646     | 74.000         | 2.820         | PK   |
| 5  |      | 5385.520        | 65.114                 | 61.930               | -8.886      | 74.000         | 3.184         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 5250MHz |                       |

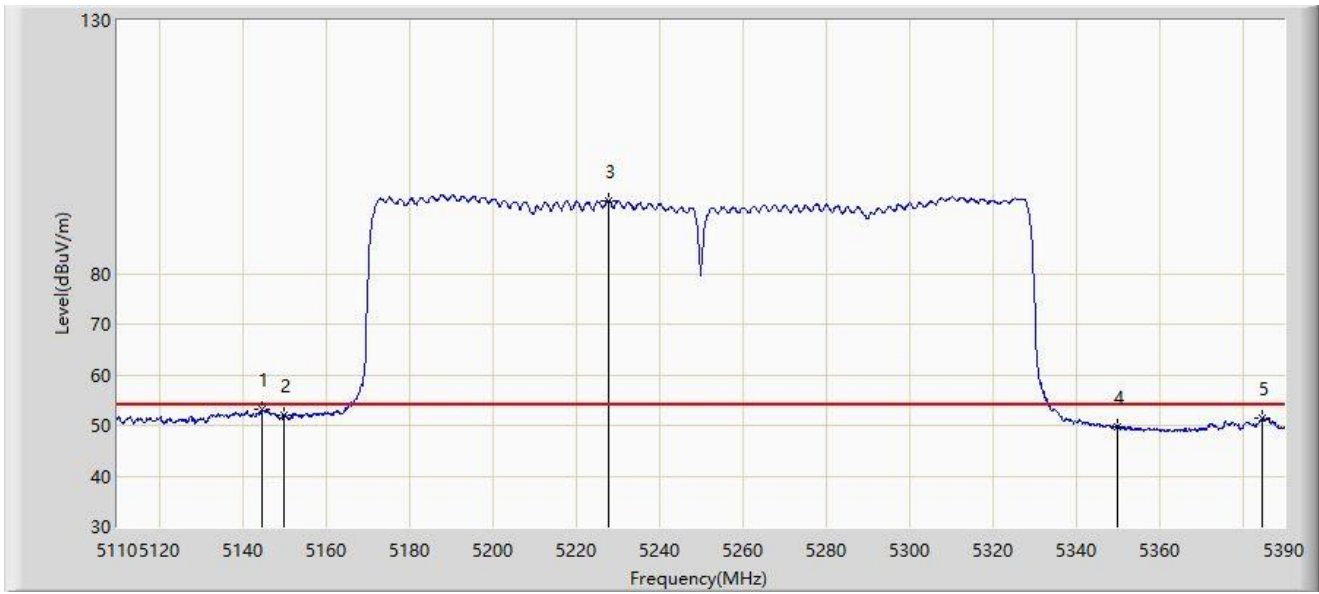


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5144.860        | 53.137                 | 49.701               | -0.863      | 54.000         | 3.437         | AV   |
| 2  |      | 5150.000        | 52.084                 | 48.602               | -1.916      | 54.000         | 3.482         | AV   |
| 3  |      | 5227.880        | 94.460                 | 91.331               | N/A         | N/A            | 3.129         | AV   |
| 4  |      | 5350.000        | 49.845                 | 47.025               | -4.155      | 54.000         | 2.820         | AV   |
| 5  |      | 5384.680        | 51.441                 | 48.275               | -2.559      | 54.000         | 3.167         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 5250MHz |                       |

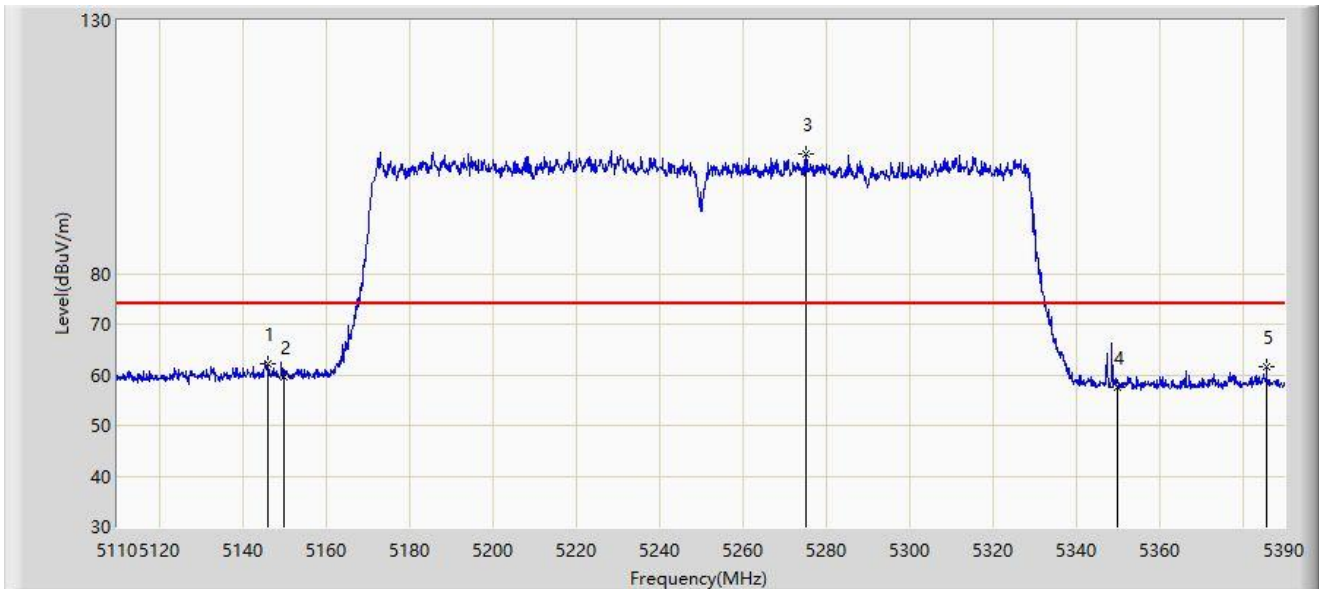


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5146.120        | 62.244                 | 58.792               | -11.756     | 74.000         | 3.452         | PK   |
| 2  |      | 5150.000        | 59.607                 | 56.125               | -14.393     | 74.000         | 3.482         | PK   |
| 3  |      | 5275.340        | 103.562                | 100.963              | N/A         | N/A            | 2.600         | PK   |
| 4  |      | 5350.000        | 57.523                 | 54.703               | -16.477     | 74.000         | 2.820         | PK   |
| 5  |      | 5385.800        | 61.550                 | 58.359               | -12.450     | 74.000         | 3.191         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 5250MHz |                       |

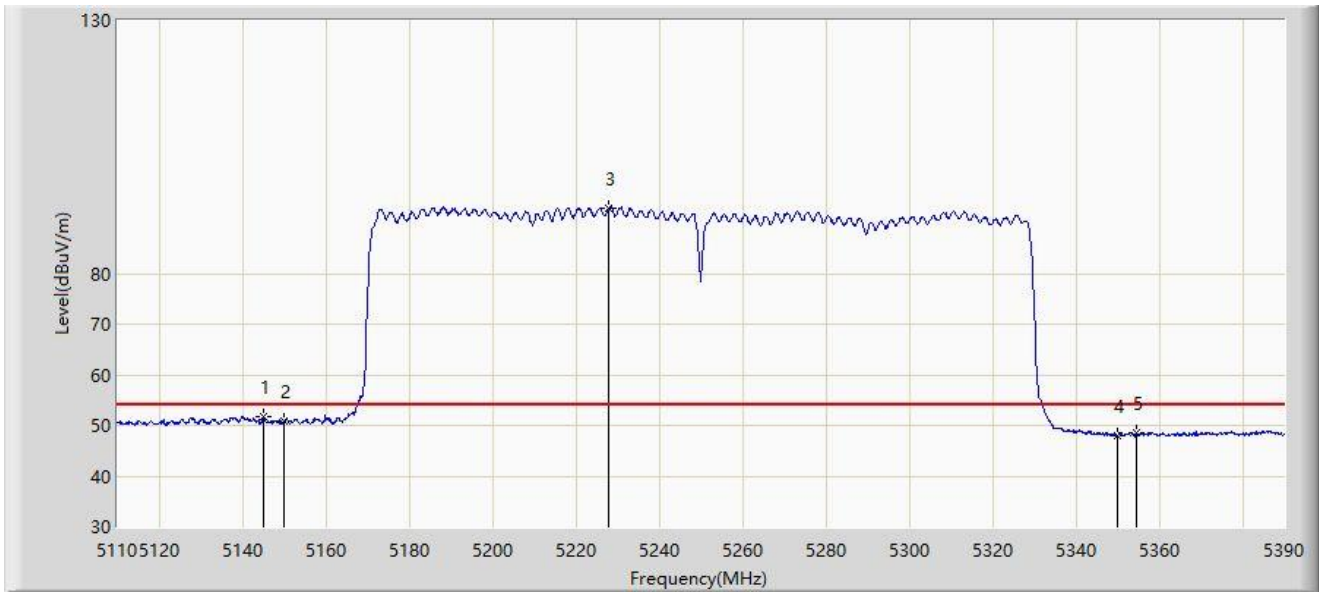


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5145.140        | 51.710                 | 48.271               | -2.290      | 54.000         | 3.439         | AV   |
| 2  |      | 5150.000        | 50.856                 | 47.374               | -3.144      | 54.000         | 3.482         | AV   |
| 3  |      | 5227.880        | 92.897                 | 89.768               | N/A         | N/A            | 3.129         | AV   |
| 4  |      | 5350.000        | 48.055                 | 45.235               | -5.945      | 54.000         | 2.820         | AV   |
| 5  |      | 5354.580        | 48.608                 | 45.810               | -5.392      | 54.000         | 2.798         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 5570MHz |                       |

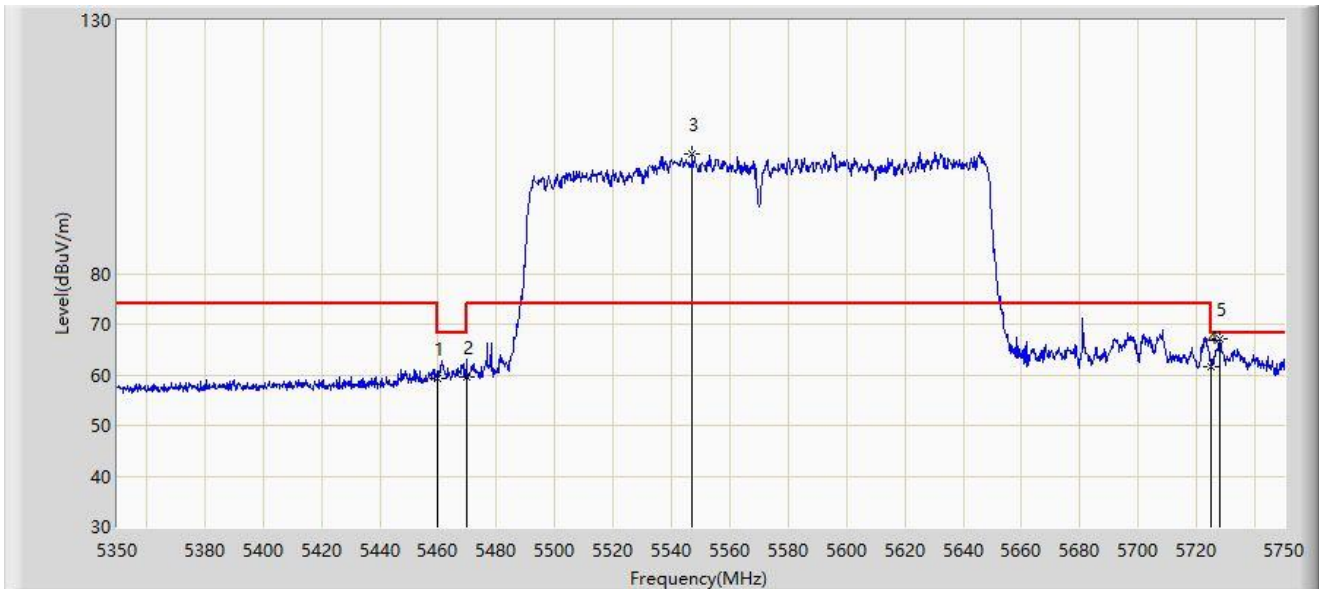


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5460.000        | 59.220                 | 56.071               | -14.780     | 74.000         | 3.149         | PK   |
| 2  |      | 5470.000        | 59.696                 | 56.354               | -8.504      | 68.200         | 3.341         | PK   |
| 3  |      | 5547.200        | 103.588                | 100.193              | N/A         | N/A            | 3.395         | PK   |
| 4  |      | 5725.000        | 61.622                 | 56.919               | -6.578      | 68.200         | 4.703         | PK   |
| 5  | *    | 5727.800        | 67.087                 | 62.404               | -1.113      | 68.200         | 4.684         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 5570MHz |                       |

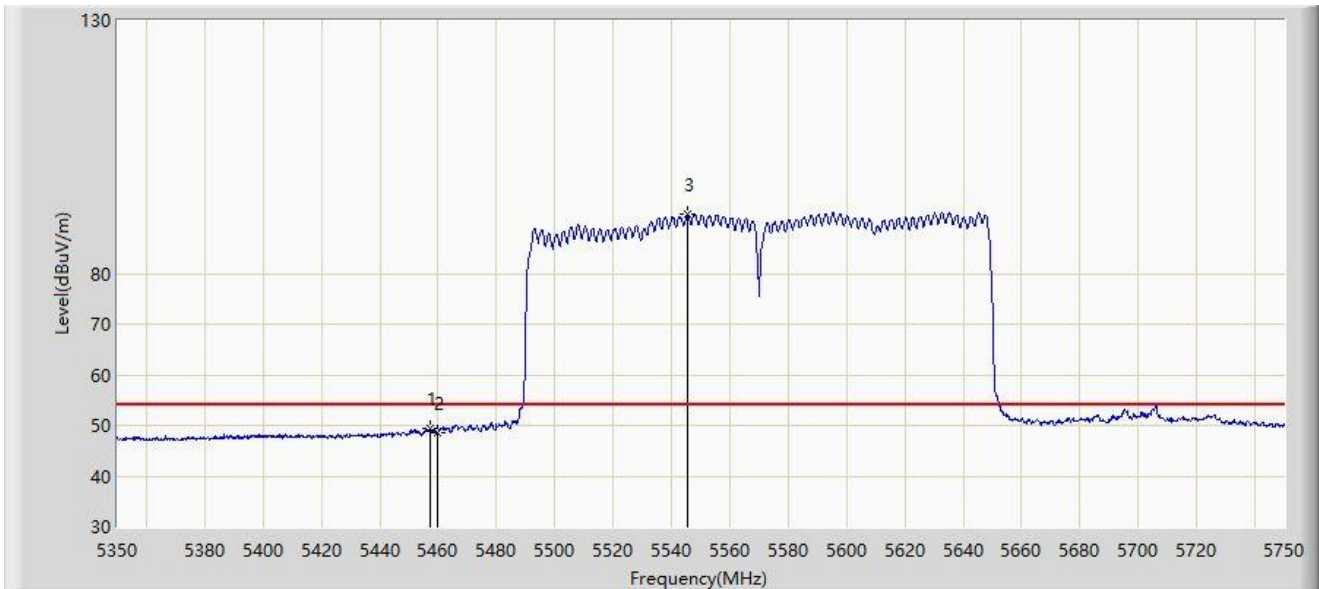


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5457.200        | 49.298                 | 46.203               | -4.702      | 54.000         | 3.095         | AV   |
| 2  |      | 5460.000        | 48.512                 | 45.363               | -5.488      | 54.000         | 3.149         | AV   |
| 3  |      | 5545.400        | 91.655                 | 88.278               | N/A         | N/A            | 3.377         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 5570MHz |                       |

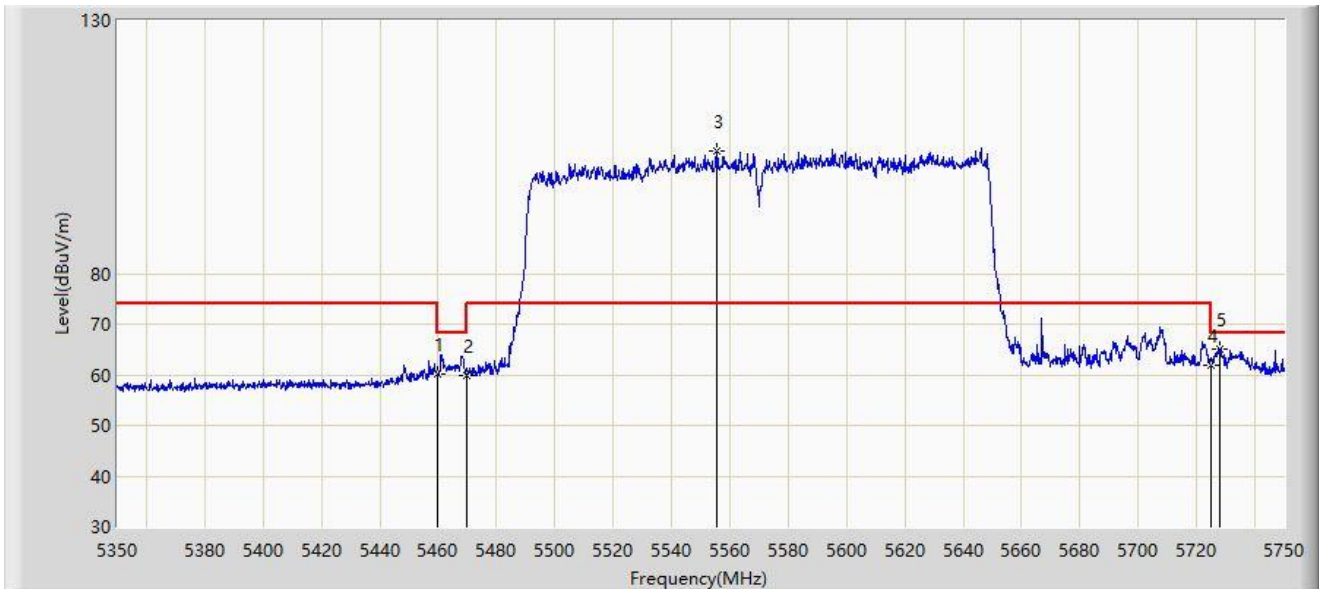


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5460.000        | 60.047                 | 56.898               | -13.953     | 74.000         | 3.149         | PK   |
| 2  |      | 5470.000        | 59.851                 | 56.509               | -8.349      | 68.200         | 3.341         | PK   |
| 3  |      | 5555.400        | 104.125                | 100.639              | N/A         | N/A            | 3.486         | PK   |
| 4  |      | 5725.000        | 61.819                 | 57.116               | -6.381      | 68.200         | 4.703         | PK   |
| 5  | *    | 5727.800        | 65.096                 | 60.413               | -3.104      | 68.200         | 4.684         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11ax-HE160 at 5570MHz |                       |

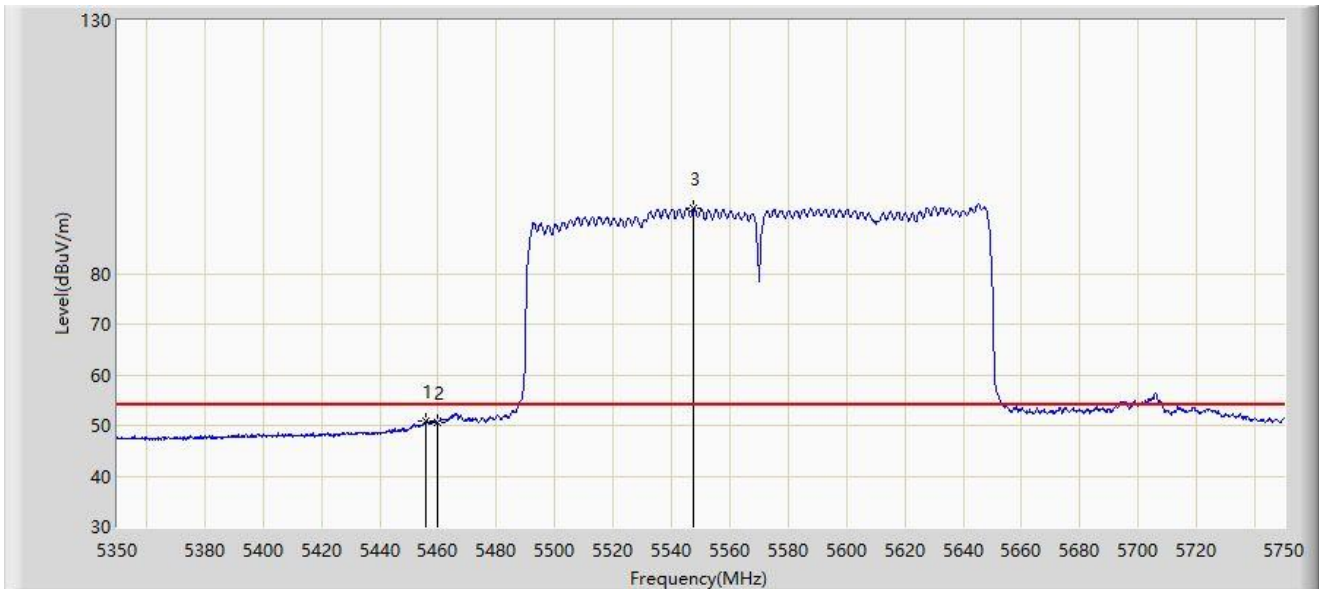


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5456.000        | 50.845                 | 47.770               | -3.155      | 54.000         | 3.075         | AV   |
| 2  |      | 5460.000        | 50.697                 | 47.548               | -3.303      | 54.000         | 3.149         | AV   |
| 3  |      | 5547.600        | 92.922                 | 89.523               | N/A         | N/A            | 3.400         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5180MHz |                       |

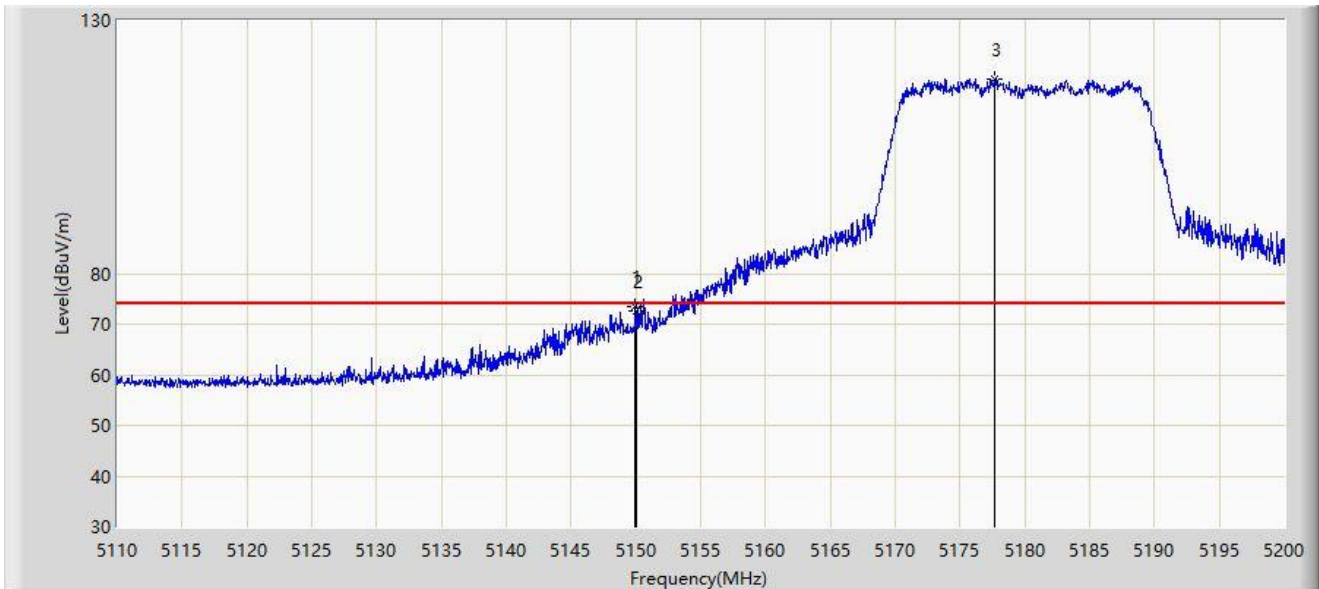


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.960        | 73.444                 | 69.963               | -0.556      | 74.000         | 3.482         | PK   |
| 2  |      | 5150.000        | 72.535                 | 69.053               | -1.465      | 74.000         | 3.482         | PK   |
| 3  |      | 5177.725        | 118.441                | 115.126              | N/A         | N/A            | 3.316         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5180MHz |                       |

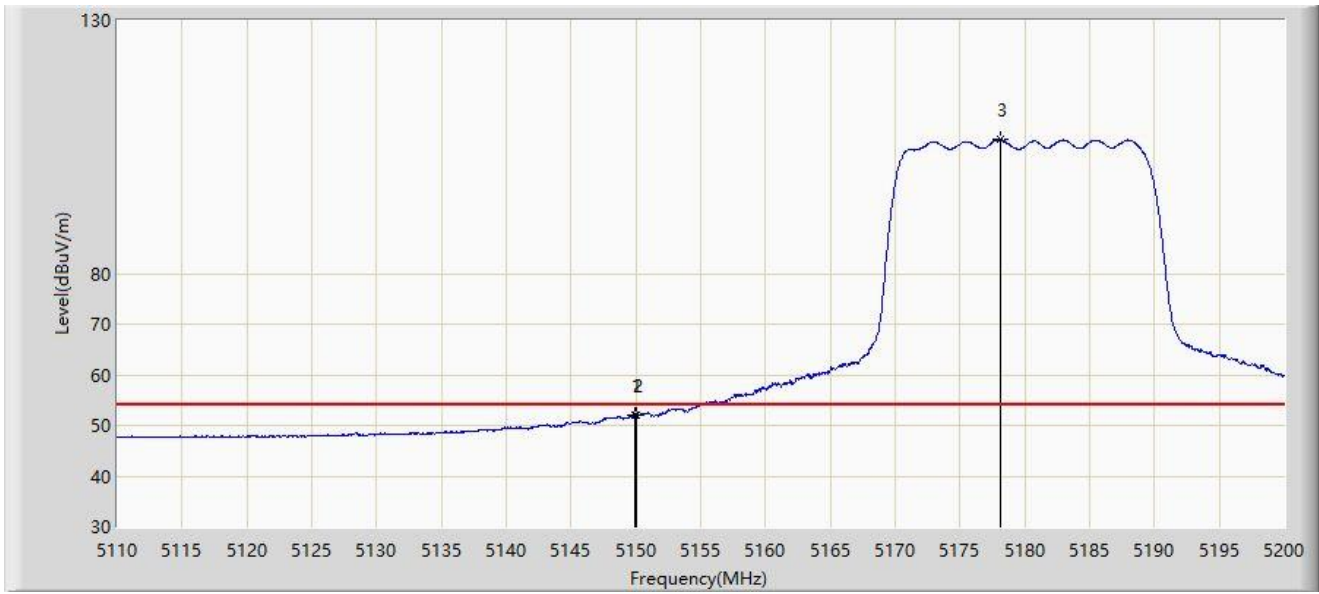


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.915        | 52.172                 | 48.691               | -1.828      | 54.000         | 3.482         | AV   |
| 2  |      | 5150.000        | 52.113                 | 48.631               | -1.887      | 54.000         | 3.482         | AV   |
| 3  |      | 5178.130        | 106.421                | 103.114              | N/A         | N/A            | 3.307         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5180MHz |                       |

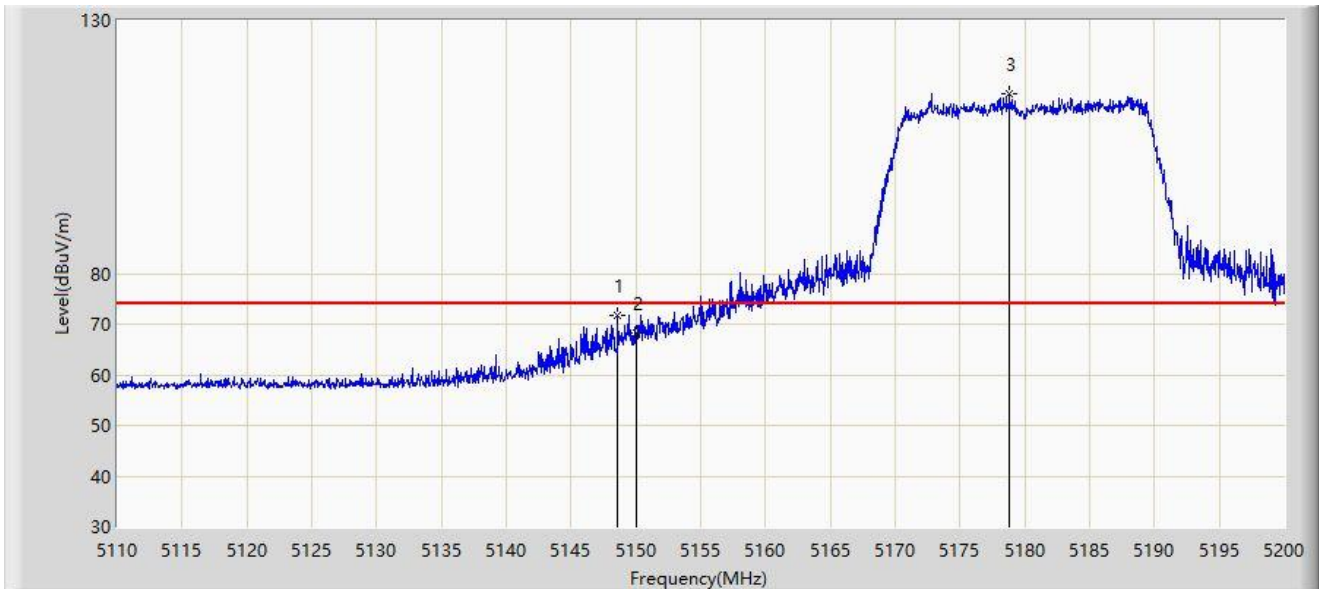


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5148.610        | 71.725                 | 68.248               | -2.275      | 74.000         | 3.478         | PK   |
| 2  |      | 5150.000        | 68.261                 | 64.779               | -5.739      | 74.000         | 3.482         | PK   |
| 3  |      | 5178.850        | 115.447                | 112.154              | N/A         | N/A            | 3.293         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5180MHz |                       |

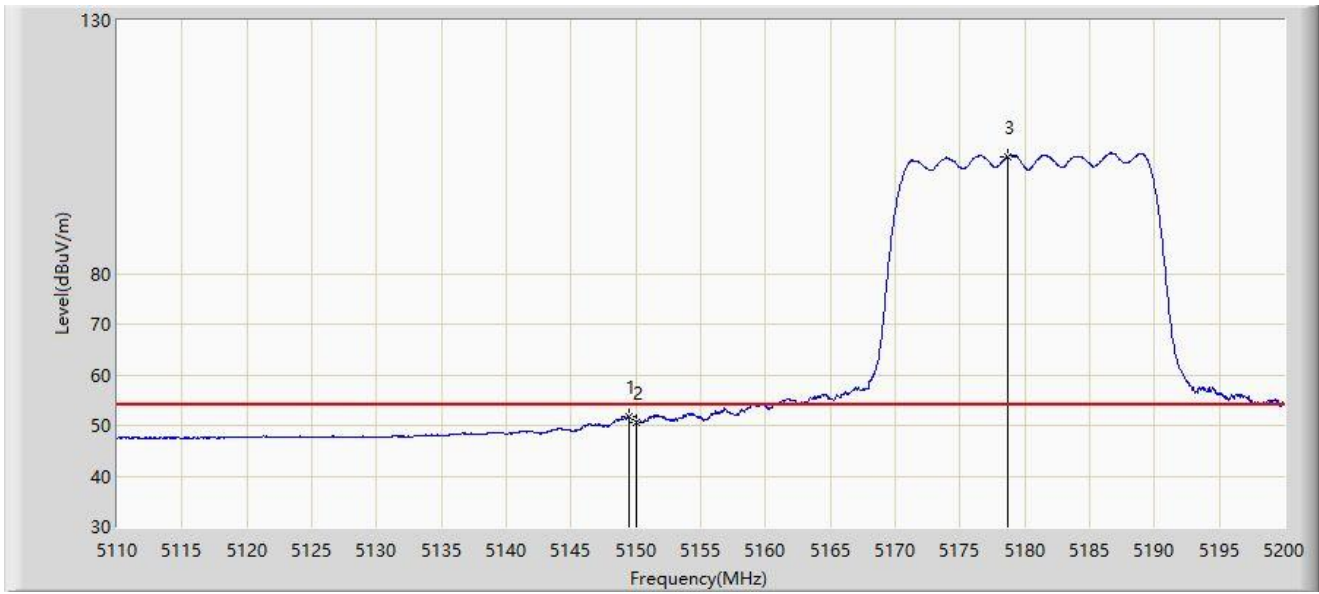


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.420        | 51.657                 | 48.177               | -2.343      | 54.000         | 3.479         | AV   |
| 2  |      | 5150.000        | 50.716                 | 47.234               | -3.284      | 54.000         | 3.482         | AV   |
| 3  |      | 5178.670        | 103.168                | 99.872               | N/A         | N/A            | 3.296         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5320MHz |                       |

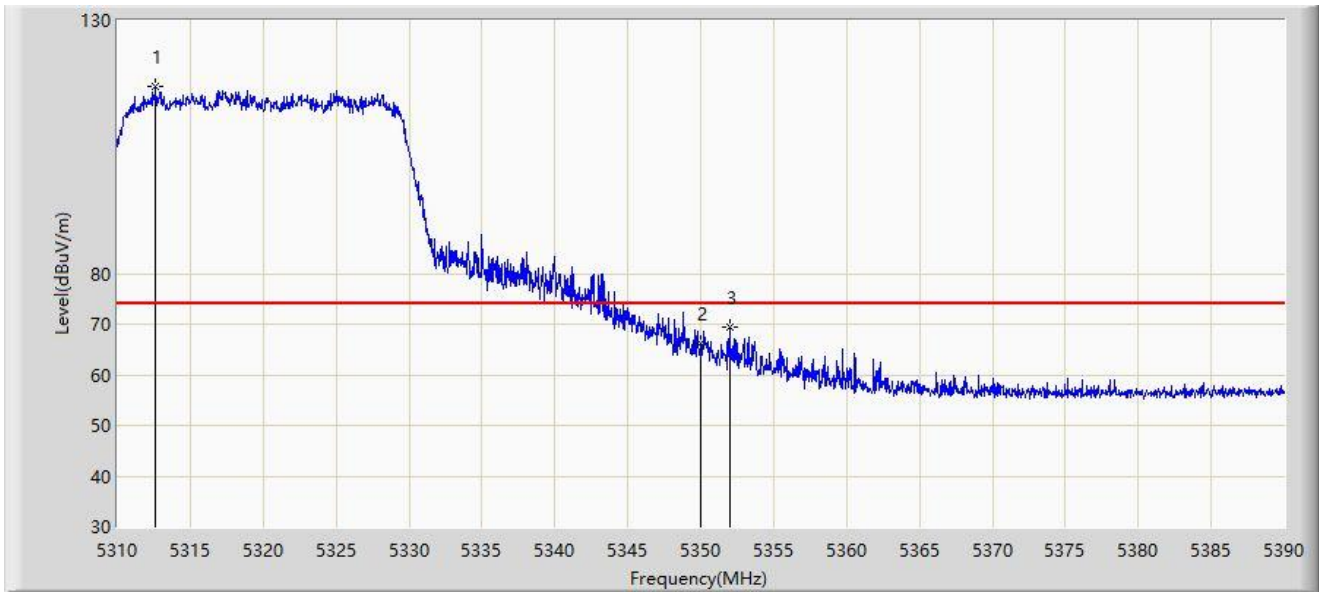


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5312.640        | 117.016                | 114.099              | N/A         | N/A            | 2.917         | PK   |
| 2  |      | 5350.000        | 66.100                 | 63.280               | -7.900      | 74.000         | 2.820         | PK   |
| 3  | *    | 5351.960        | 69.315                 | 66.528               | -4.685      | 74.000         | 2.787         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5320MHz |                       |

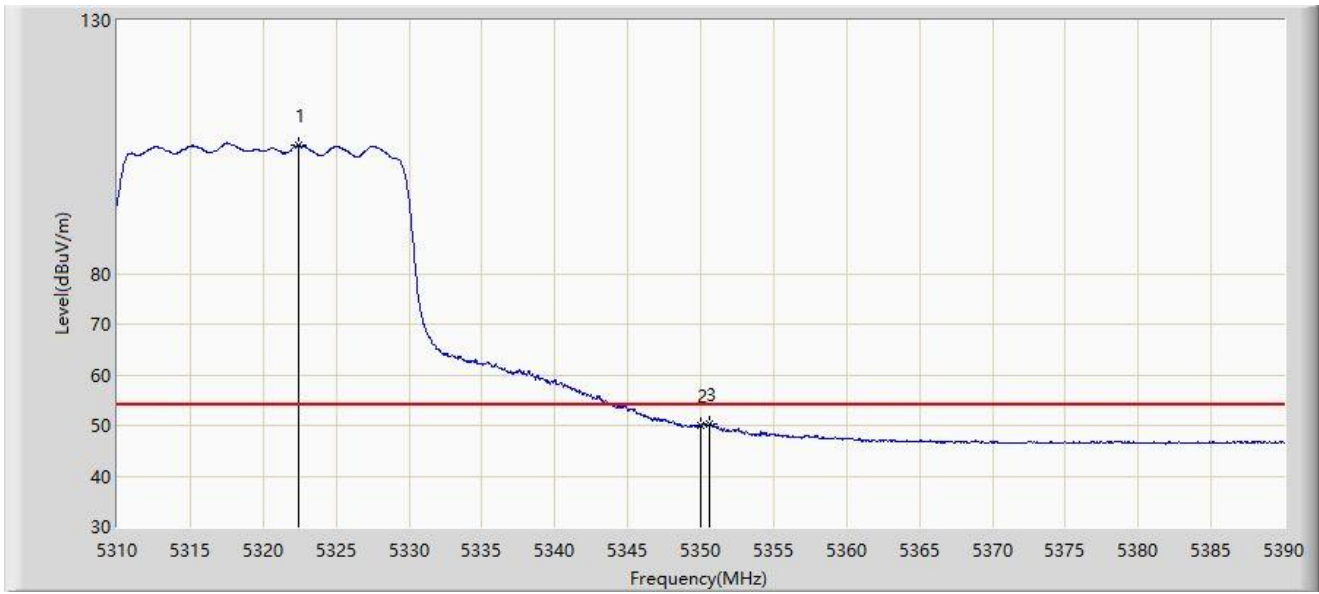


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5322.480        | 105.342                | 102.339              | N/A         | N/A            | 3.002         | AV   |
| 2  |      | 5350.000        | 49.967                 | 47.147               | -4.033      | 54.000         | 2.820         | AV   |
| 3  | *    | 5350.640        | 50.382                 | 47.573               | -3.618      | 54.000         | 2.810         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5320MHz |                       |

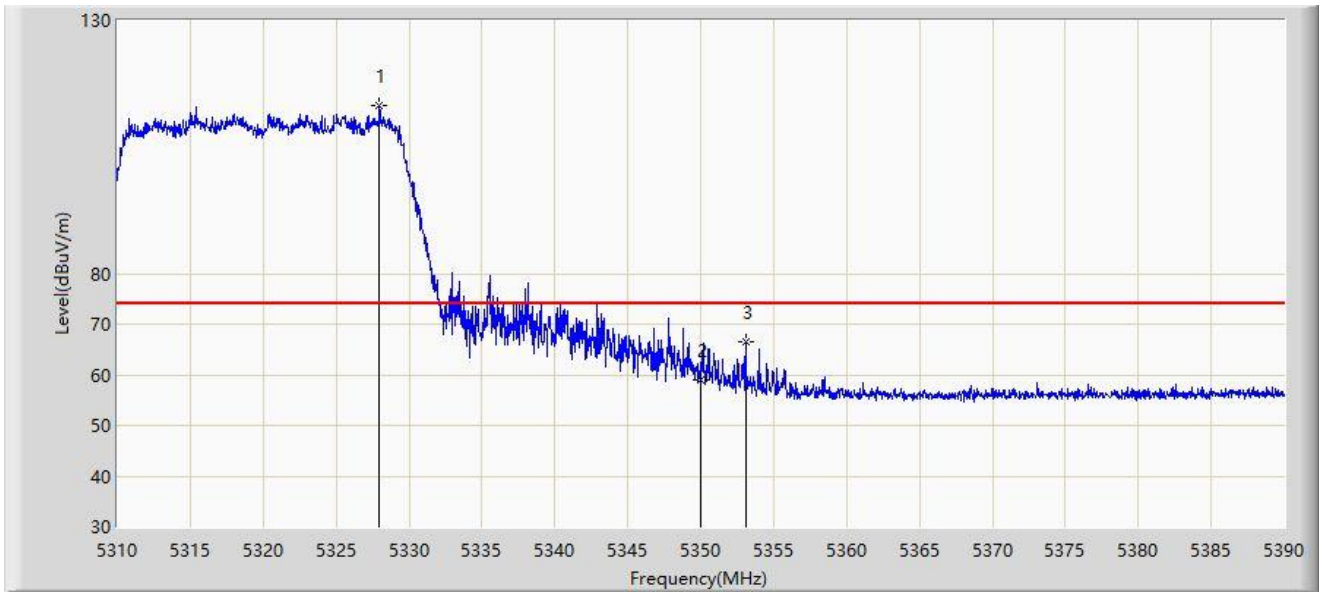


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5327.960        | 113.323                | 110.329              | N/A         | N/A            | 2.994         | PK   |
| 2  |      | 5350.000        | 59.101                 | 56.281               | -14.899     | 74.000         | 2.820         | PK   |
| 3  | *    | 5353.080        | 66.553                 | 63.762               | -7.447      | 74.000         | 2.791         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5320MHz |                       |

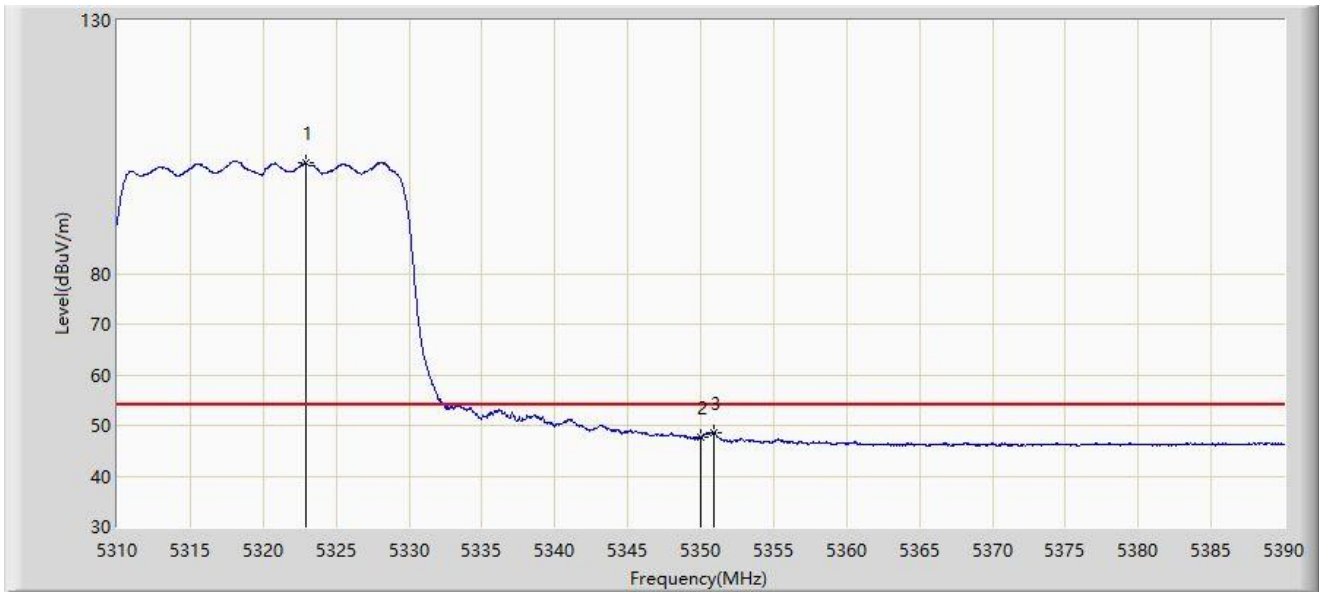


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5322.920        | 101.899                | 98.897               | N/A         | N/A            | 3.002         | AV   |
| 2  |      | 5350.000        | 47.812                 | 44.992               | -6.188      | 54.000         | 2.820         | AV   |
| 3  | *    | 5350.920        | 48.676                 | 45.872               | -5.324      | 54.000         | 2.804         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5500MHz |                       |

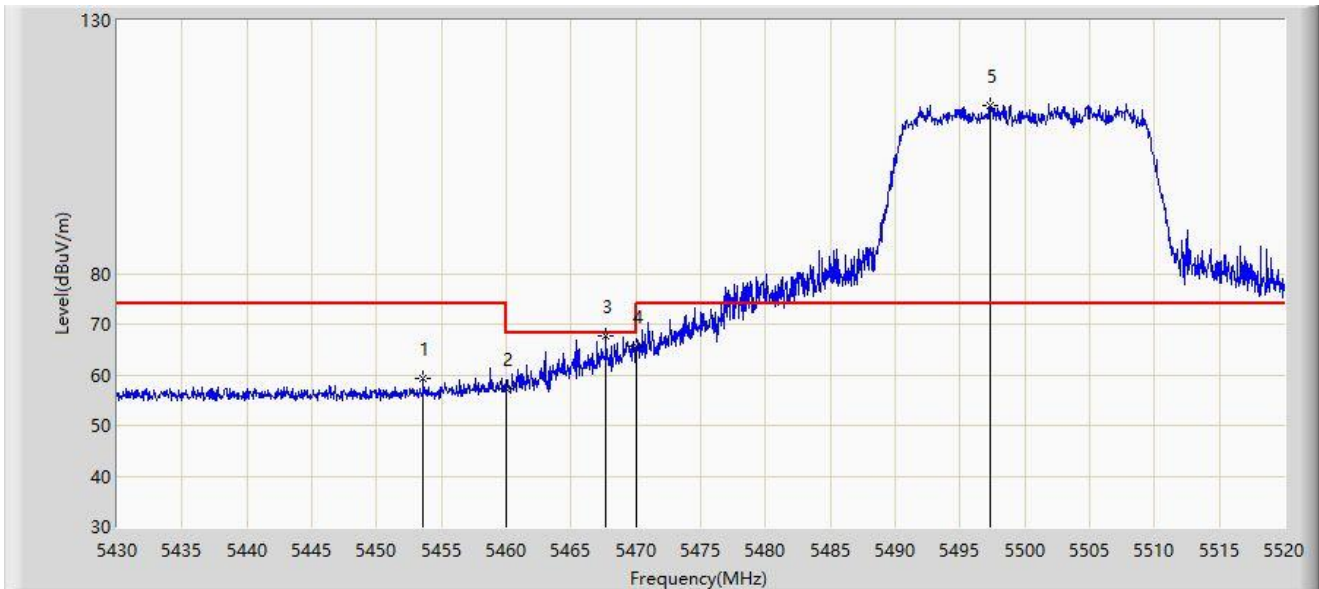


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5453.625        | 59.392                 | 56.345               | -14.608     | 74.000         | 3.047         | PK   |
| 2  |      | 5460.000        | 57.184                 | 54.035               | -16.816     | 74.000         | 3.149         | PK   |
| 3  | *    | 5467.710        | 67.642                 | 64.344               | -0.558      | 68.200         | 3.298         | PK   |
| 4  |      | 5470.000        | 65.667                 | 62.325               | -2.533      | 68.200         | 3.341         | PK   |
| 5  |      | 5497.365        | 113.164                | 109.960              | N/A         | N/A            | 3.204         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5500MHz |                       |

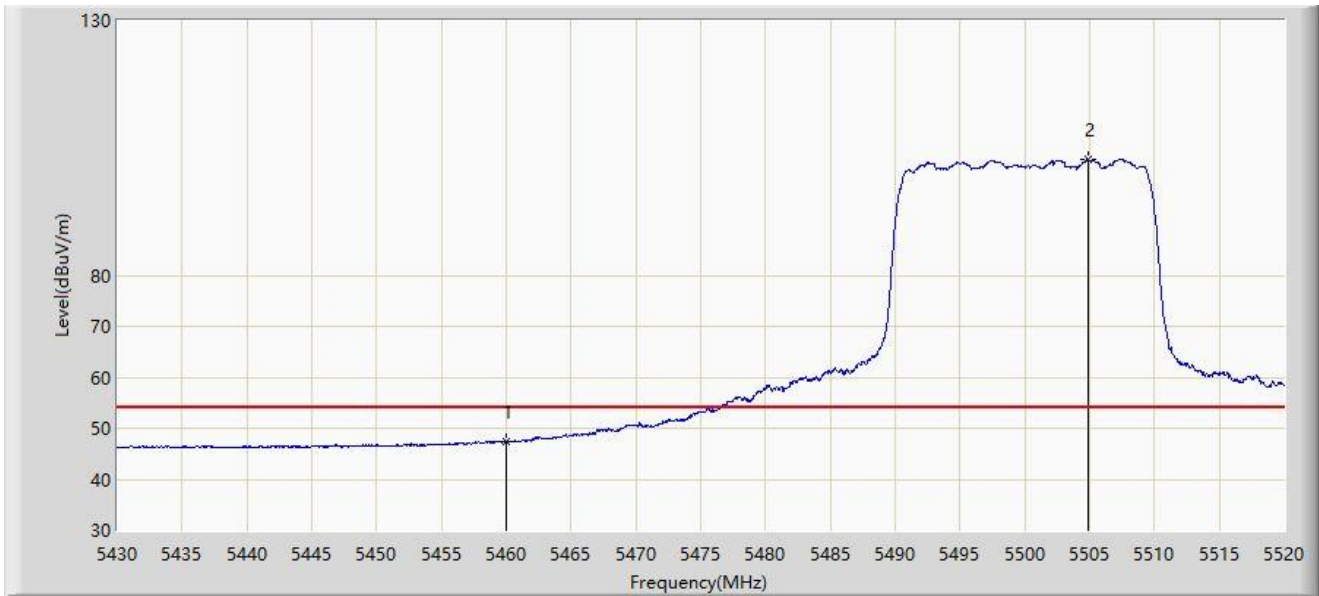


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5460.000        | 47.504                 | 44.355               | -6.496      | 54.000         | 3.149         | AV   |
| 2  |      | 5504.835        | 102.846                | 99.694               | N/A         | N/A            | 3.152         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5500MHz |                       |

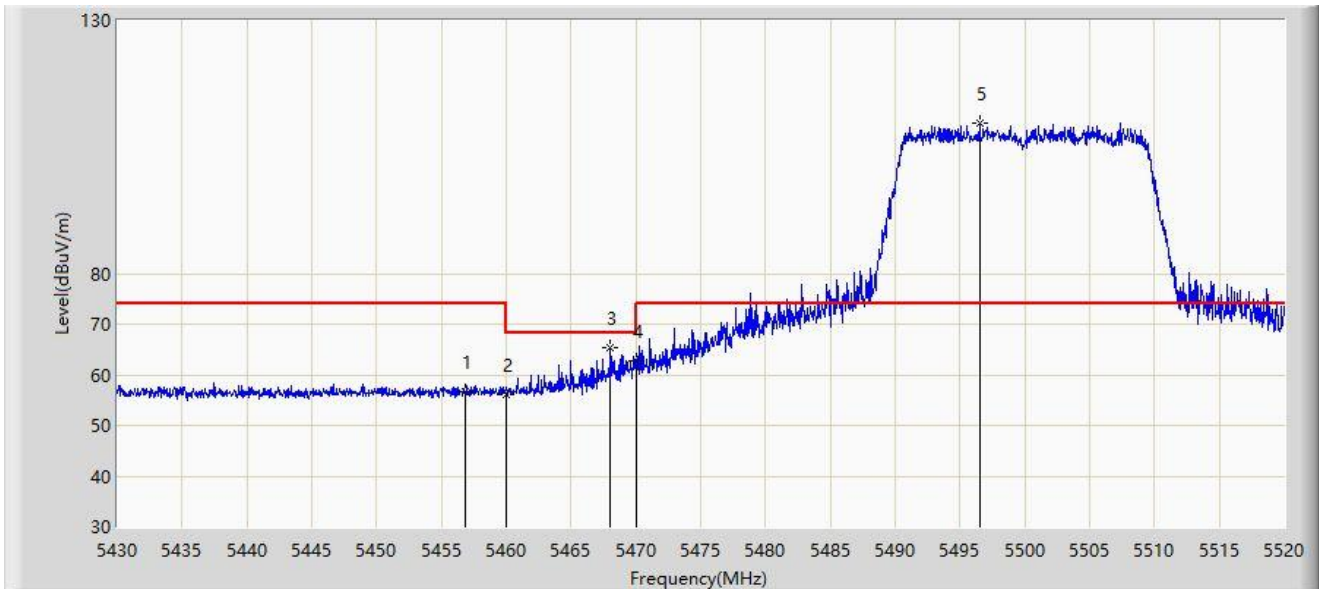


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5456.820        | 56.591                 | 53.503               | -17.409     | 74.000         | 3.088         | PK   |
| 2  |      | 5460.000        | 56.013                 | 52.864               | -17.987     | 74.000         | 3.149         | PK   |
| 3  | *    | 5468.025        | 65.438                 | 62.134               | -2.762      | 68.200         | 3.304         | PK   |
| 4  |      | 5470.000        | 62.830                 | 59.488               | -5.370      | 68.200         | 3.341         | PK   |
| 5  |      | 5496.510        | 109.837                | 106.627              | N/A         | N/A            | 3.210         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5500MHz |                       |

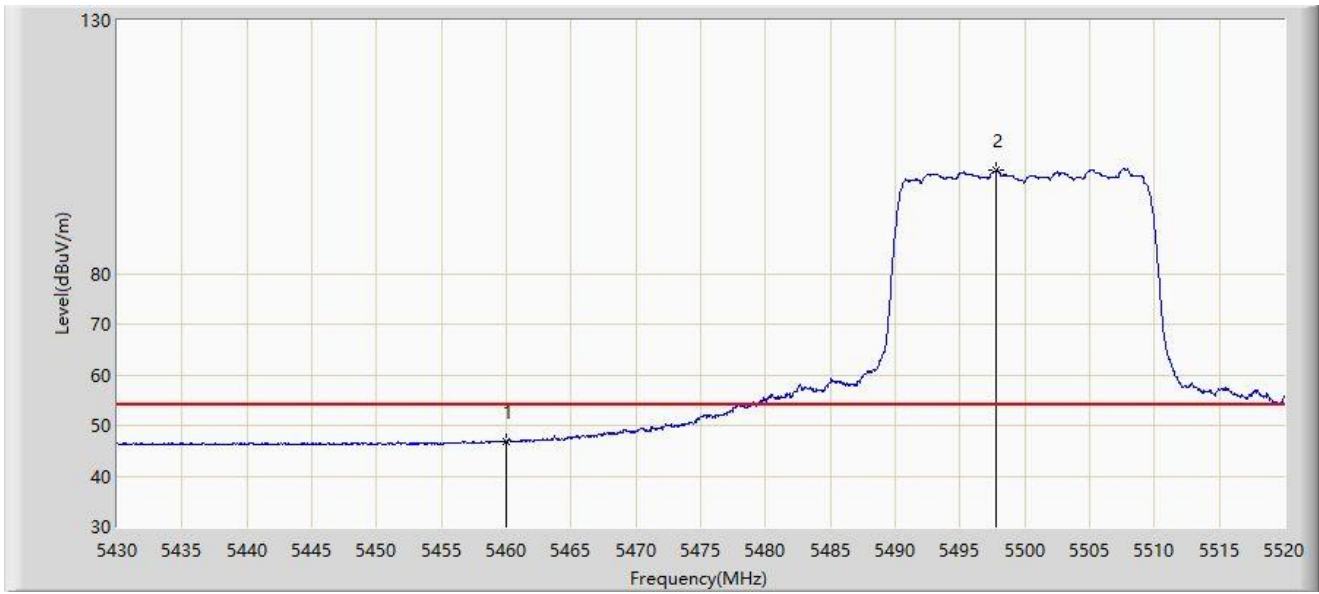


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5460.000        | 46.776                 | 43.627               | -7.224      | 54.000         | 3.149         | AV   |
| 2  |      | 5497.815        | 100.361                | 97.160               | N/A         | N/A            | 3.201         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5700MHz |                       |

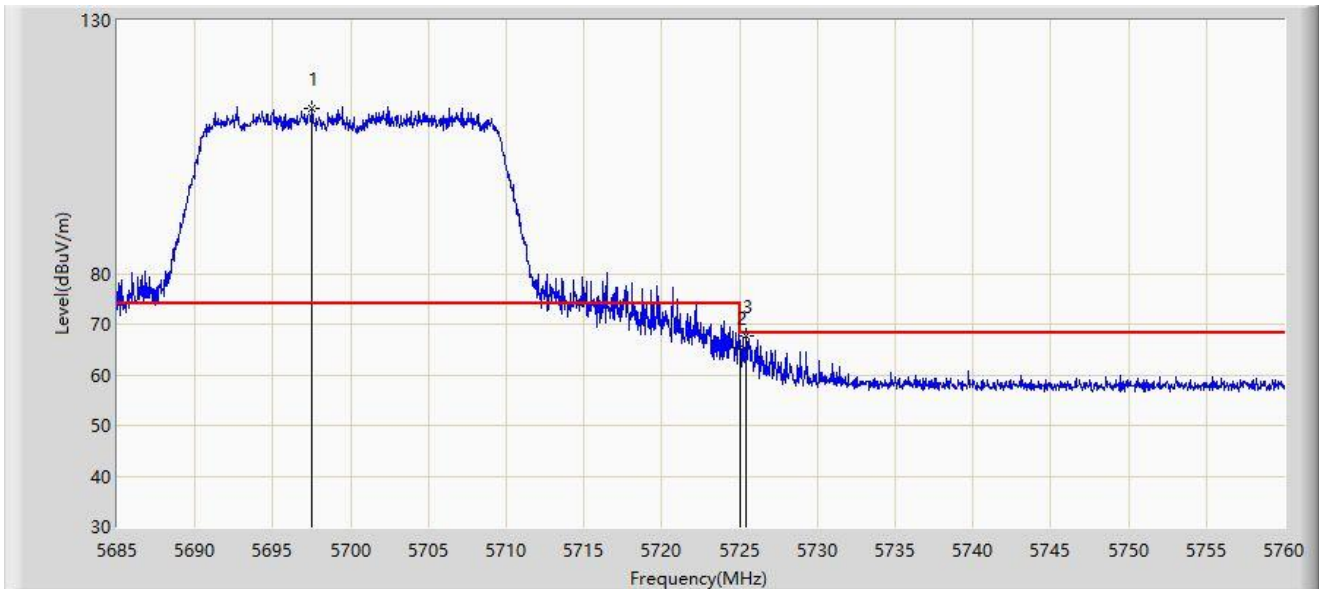


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5697.525        | 112.528                | 108.129              | N/A         | N/A            | 4.400         | PK   |
| 2  |      | 5725.000        | 65.255                 | 60.552               | -2.945      | 68.200         | 4.703         | PK   |
| 3  | *    | 5725.425        | 67.565                 | 62.858               | -0.635      | 68.200         | 4.707         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5700MHz |                       |

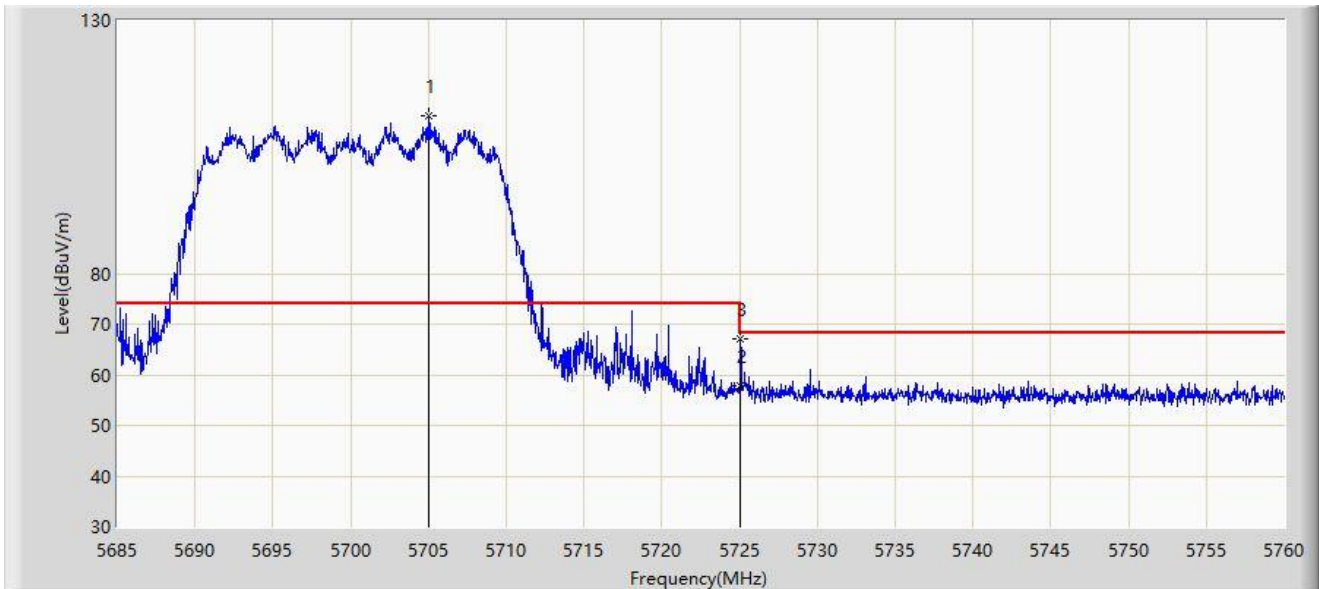


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5704.987        | 111.205                | 106.692              | N/A         | N/A            | 4.513         | PK   |
| 2  |      | 5725.000        | 57.878                 | 53.175               | -10.322     | 68.200         | 4.703         | PK   |
| 3  | *    | 5725.050        | 67.146                 | 62.442               | -1.054      | 68.200         | 4.703         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                           | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5745MHz |                       |

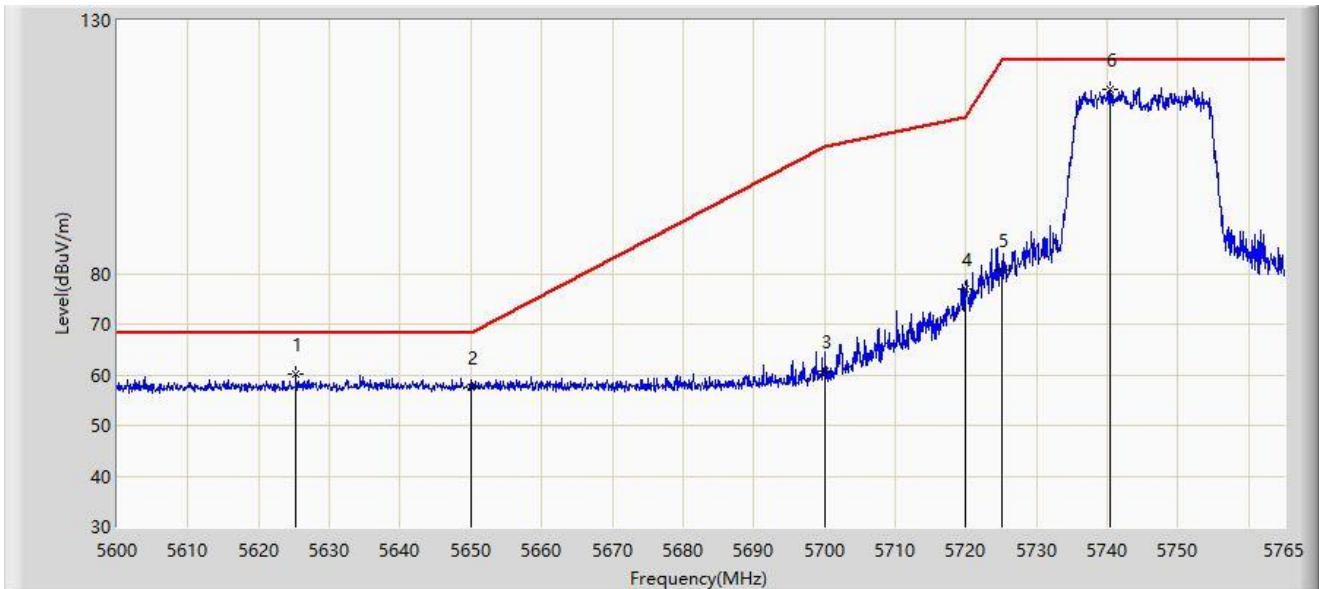


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5625.328        | 60.198                 | 56.226               | -8.002      | 68.200         | 3.973         | PK   |
| 2  |      | 5650.000        | 57.527                 | 53.404               | -10.673     | 68.200         | 4.122         | PK   |
| 3  |      | 5700.000        | 60.667                 | 56.230               | -44.533     | 105.200        | 4.437         | PK   |
| 4  |      | 5720.000        | 76.854                 | 72.190               | -33.946     | 110.800        | 4.663         | PK   |
| 5  |      | 5725.000        | 80.671                 | 75.968               | -41.529     | 122.200        | 4.703         | PK   |
| 6  |      | 5740.498        | 116.520                | 112.062              | N/A         | N/A            | 4.458         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                           | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5745MHz |                       |

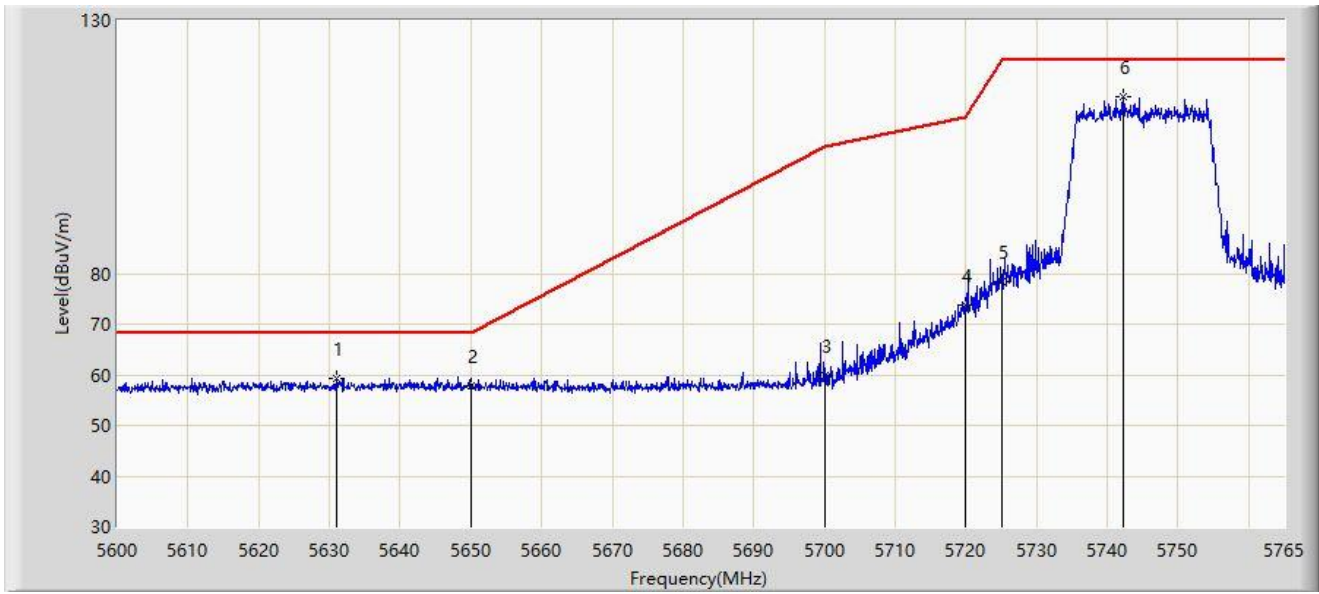


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5630.937        | 59.267                 | 55.227               | -8.933      | 68.200         | 4.040         | PK   |
| 2  |      | 5650.000        | 57.806                 | 53.683               | -10.394     | 68.200         | 4.122         | PK   |
| 3  |      | 5700.000        | 59.742                 | 55.305               | -45.458     | 105.200        | 4.437         | PK   |
| 4  |      | 5720.000        | 73.724                 | 69.060               | -37.076     | 110.800        | 4.663         | PK   |
| 5  |      | 5725.000        | 78.358                 | 73.655               | -43.842     | 122.200        | 4.703         | PK   |
| 6  |      | 5742.230        | 114.815                | 110.387              | N/A         | N/A            | 4.427         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                           | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5825MHz |                       |

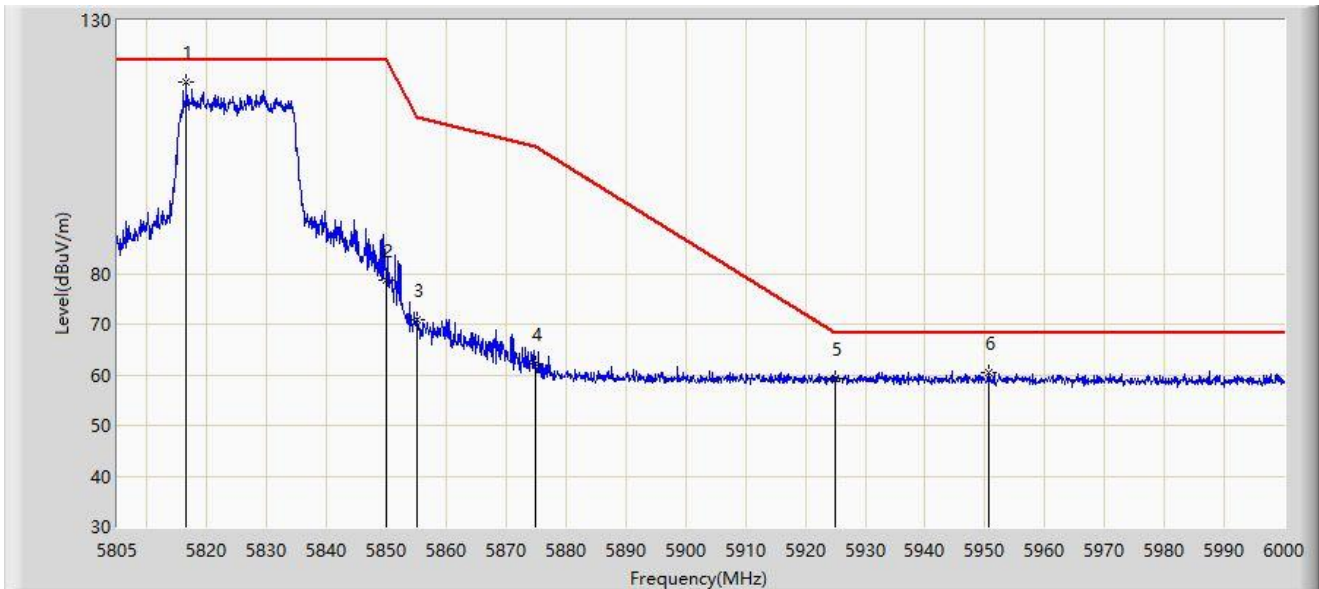


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5816.603        | 117.750                | 112.789              | N/A         | N/A            | 4.961         | PK   |
| 2  |      | 5850.000        | 78.667                 | 73.684               | -43.533     | 122.200        | 4.984         | PK   |
| 3  |      | 5855.000        | 70.819                 | 65.781               | -39.981     | 110.800        | 5.038         | PK   |
| 4  |      | 5875.000        | 62.087                 | 56.956               | -43.113     | 105.200        | 5.131         | PK   |
| 5  |      | 5925.000        | 59.336                 | 54.101               | -8.864      | 68.200         | 5.236         | PK   |
| 6  | *    | 5950.665        | 60.361                 | 55.002               | -7.839      | 68.200         | 5.360         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                           | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT20 at 5825MHz |                       |

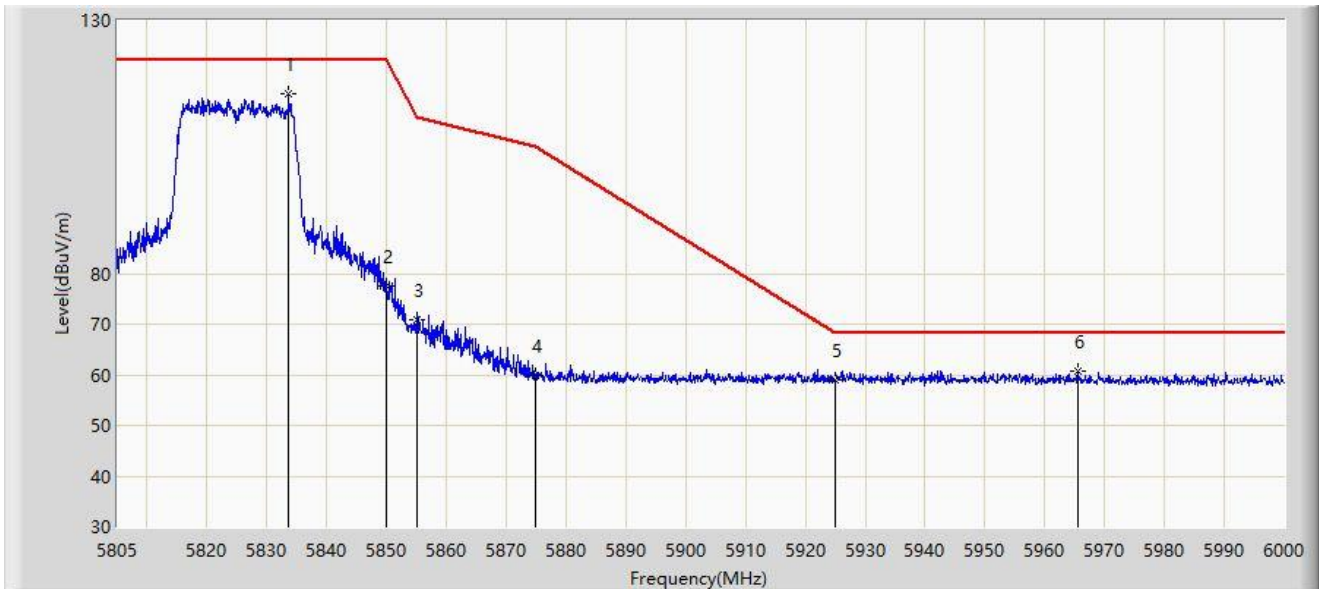


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5833.665        | 115.379                | 110.508              | N/A         | N/A            | 4.871         | PK   |
| 2  |      | 5850.000        | 77.528                 | 72.545               | -44.672     | 122.200        | 4.984         | PK   |
| 3  |      | 5855.000        | 71.013                 | 65.975               | -39.787     | 110.800        | 5.038         | PK   |
| 4  |      | 5875.000        | 59.722                 | 54.591               | -45.478     | 105.200        | 5.131         | PK   |
| 5  |      | 5925.000        | 58.842                 | 53.607               | -9.358      | 68.200         | 5.236         | PK   |
| 6  | *    | 5965.485        | 60.652                 | 55.306               | -7.548      | 68.200         | 5.346         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5190MHz |                       |

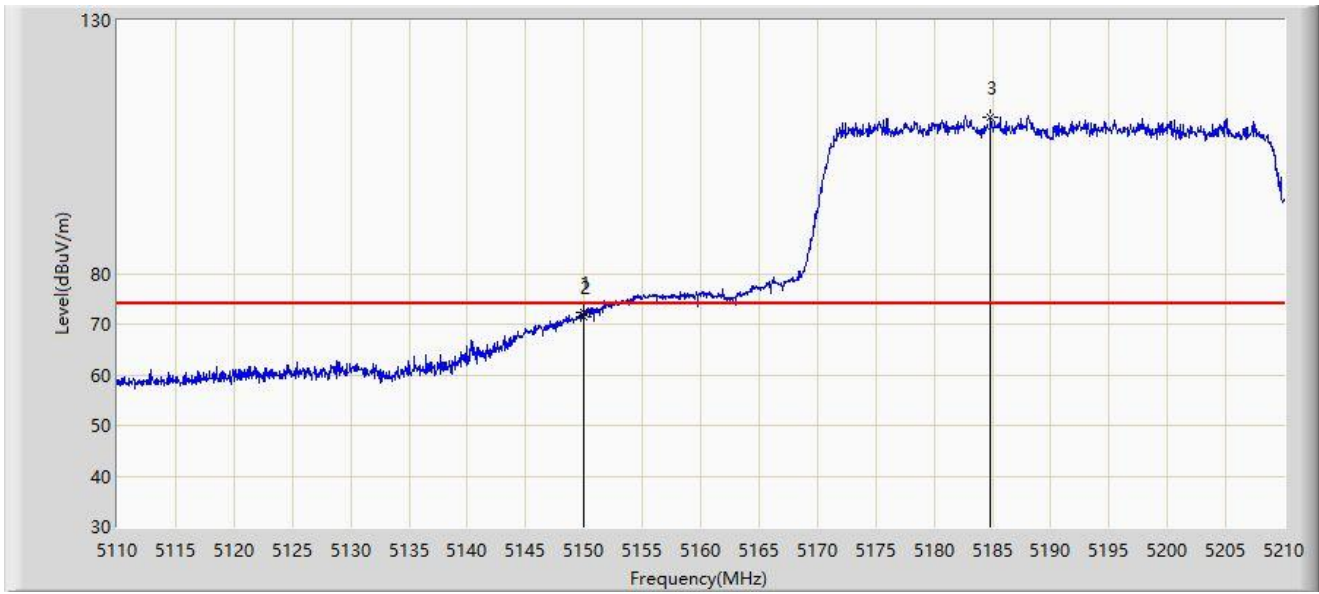


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5149.950        | 72.360                 | 68.879               | -1.640      | 74.000         | 3.482         | PK   |
| 2  |      | 5150.000        | 71.527                 | 68.045               | -2.473      | 74.000         | 3.482         | PK   |
| 3  |      | 5184.850        | 110.907                | 107.743              | N/A         | N/A            | 3.164         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5190MHz |                       |

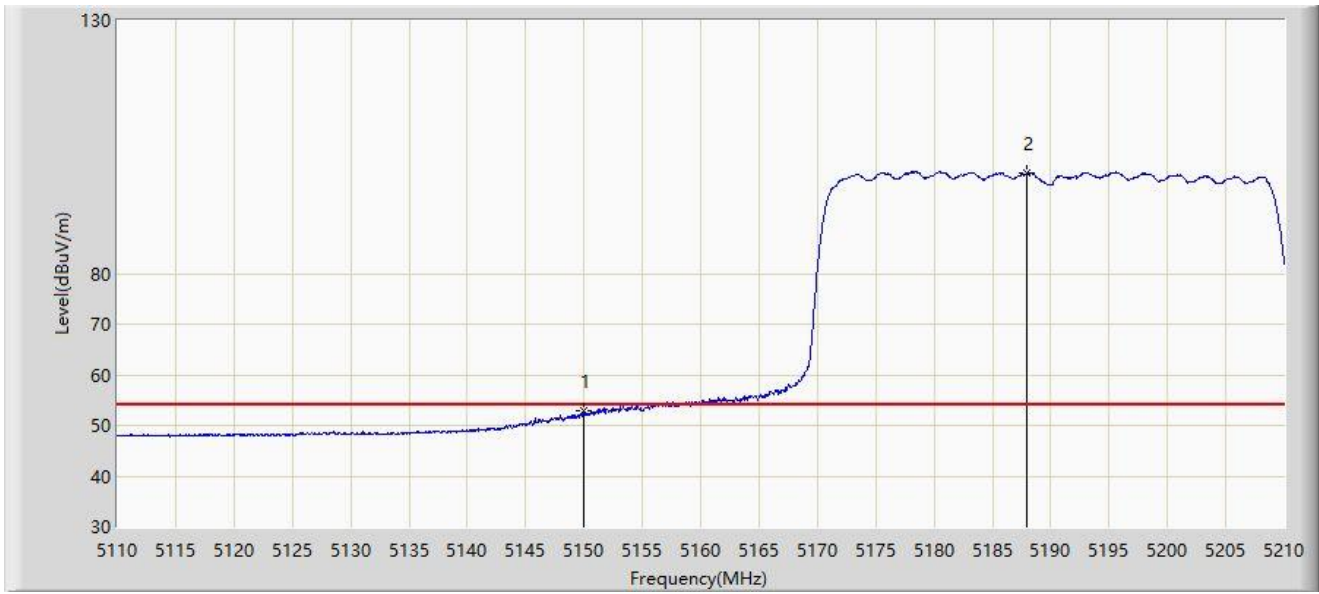


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5150.000        | 52.775                 | 49.293               | -1.225      | 54.000         | 3.482         | AV   |
| 2  |      | 5188.000        | 99.731                 | 96.639               | N/A         | N/A            | 3.093         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5190MHz |                       |

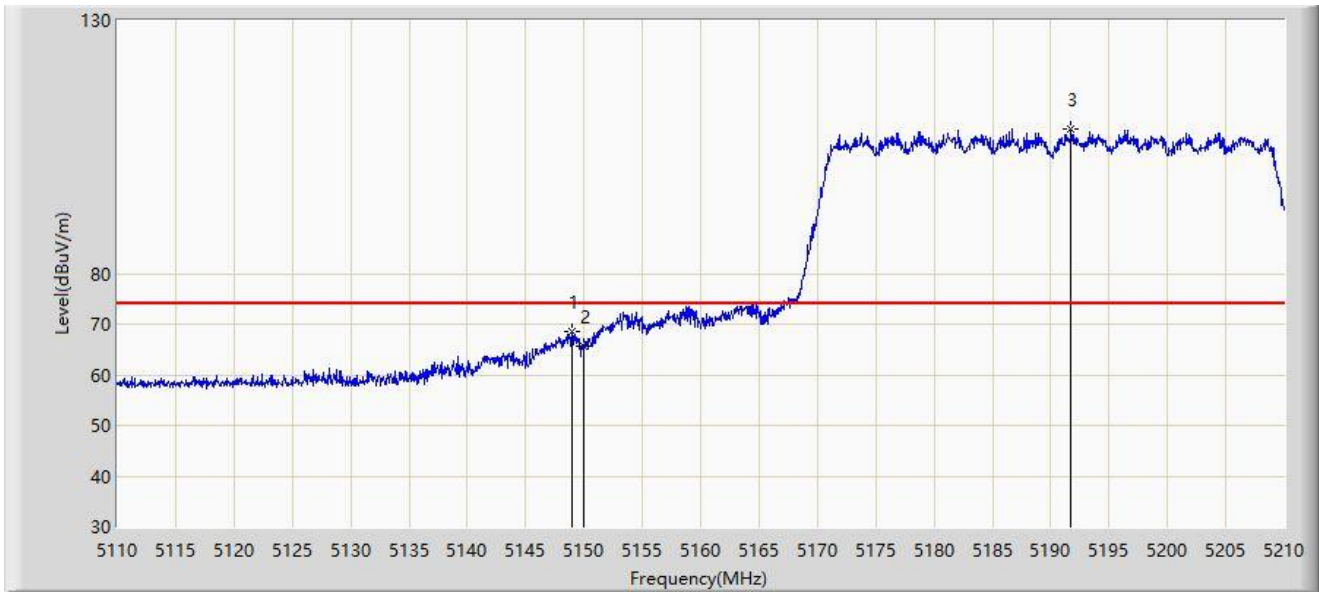


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5148.950        | 68.455                 | 64.977               | -5.545      | 74.000         | 3.479         | PK   |
| 2  |      | 5150.000        | 65.555                 | 62.073               | -8.445      | 74.000         | 3.482         | PK   |
| 3  |      | 5191.700        | 108.596                | 105.584              | N/A         | N/A            | 3.013         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5190MHz |                       |

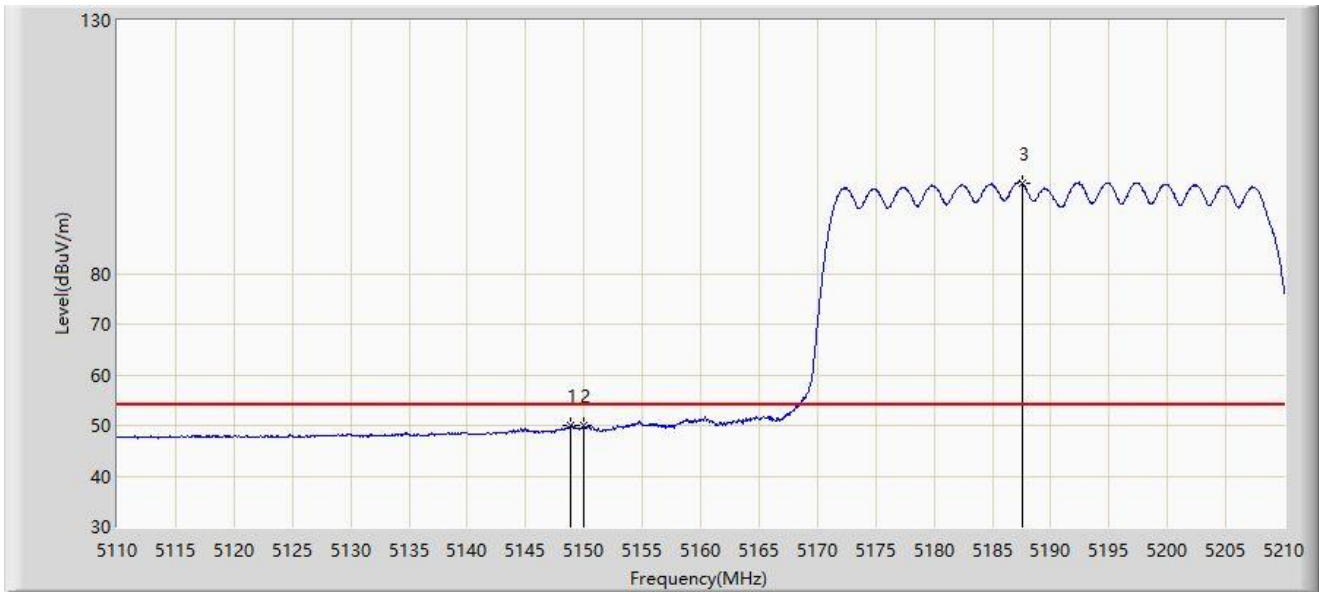


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5148.900        | 49.966                 | 46.488               | -4.034      | 54.000         | 3.478         | AV   |
| 2  |      | 5150.000        | 49.904                 | 46.422               | -4.096      | 54.000         | 3.482         | AV   |
| 3  |      | 5187.550        | 97.910                 | 94.808               | N/A         | N/A            | 3.102         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5310MHz |                       |

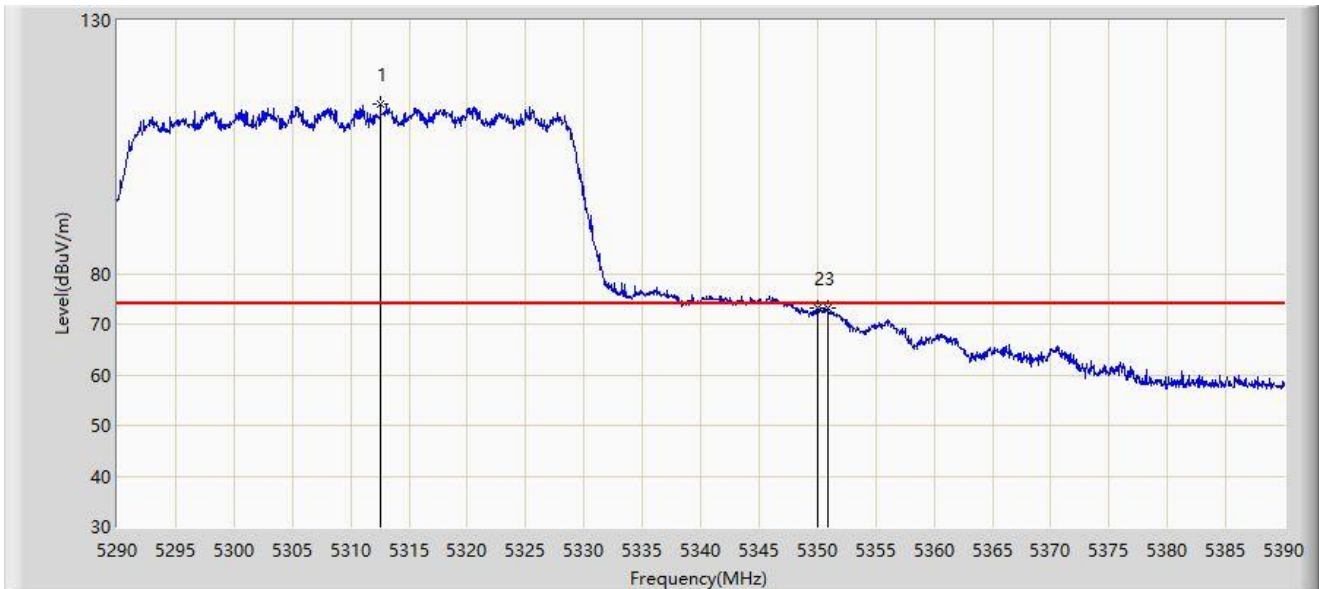


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5312.550        | 113.452                | 110.536              | N/A         | N/A            | 2.915         | PK   |
| 2  |      | 5350.000        | 73.287                 | 70.467               | -0.713      | 74.000         | 2.820         | PK   |
| 3  | *    | 5350.850        | 73.299                 | 70.493               | -0.701      | 74.000         | 2.805         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5310MHz |                       |

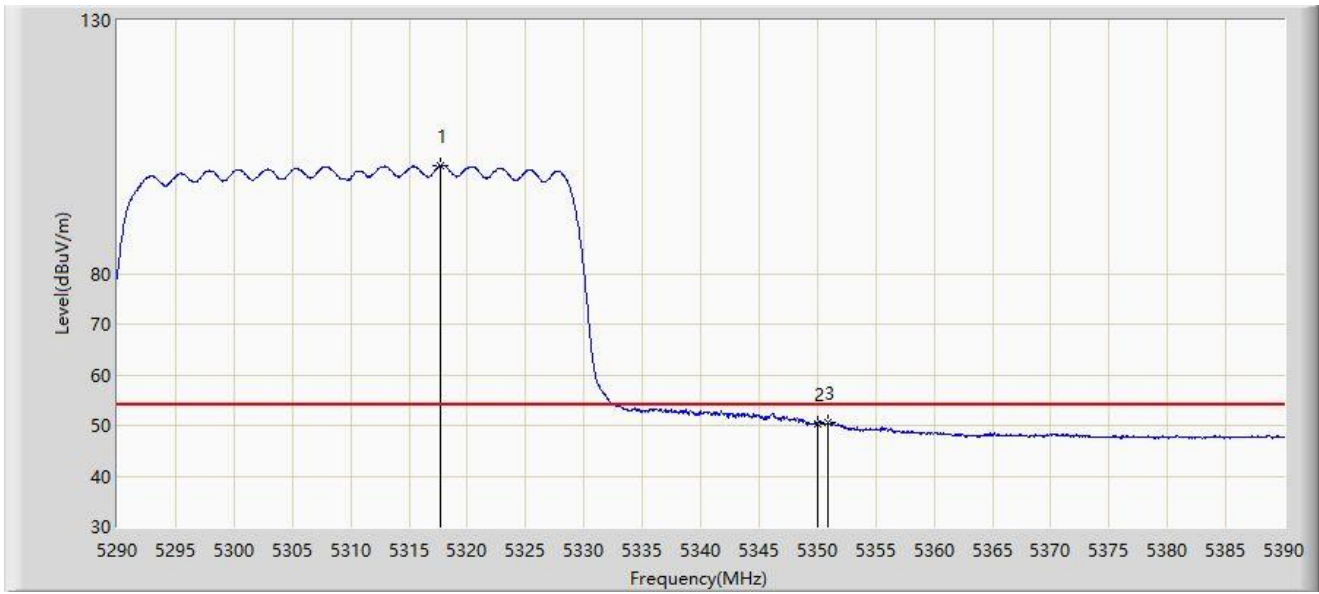


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5317.750        | 101.283                | 98.277               | N/A         | N/A            | 3.007         | AV   |
| 2  |      | 5350.000        | 50.405                 | 47.585               | -3.595      | 54.000         | 2.820         | AV   |
| 3  | *    | 5350.900        | 50.660                 | 47.855               | -3.340      | 54.000         | 2.804         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5310MHz |                       |

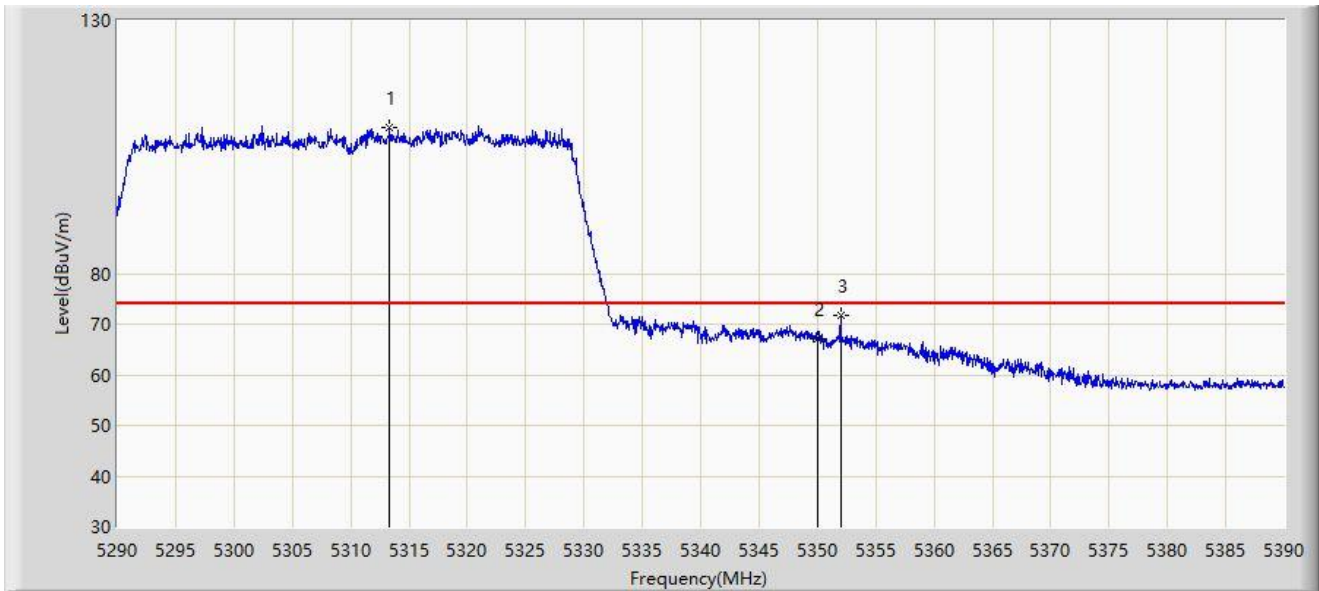


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5313.350        | 108.760                | 105.831              | N/A         | N/A            | 2.928         | PK   |
| 2  |      | 5350.000        | 67.089                 | 64.269               | -6.911      | 74.000         | 2.820         | PK   |
| 3  | *    | 5352.000        | 71.626                 | 68.840               | -2.374      | 74.000         | 2.787         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5310MHz |                       |

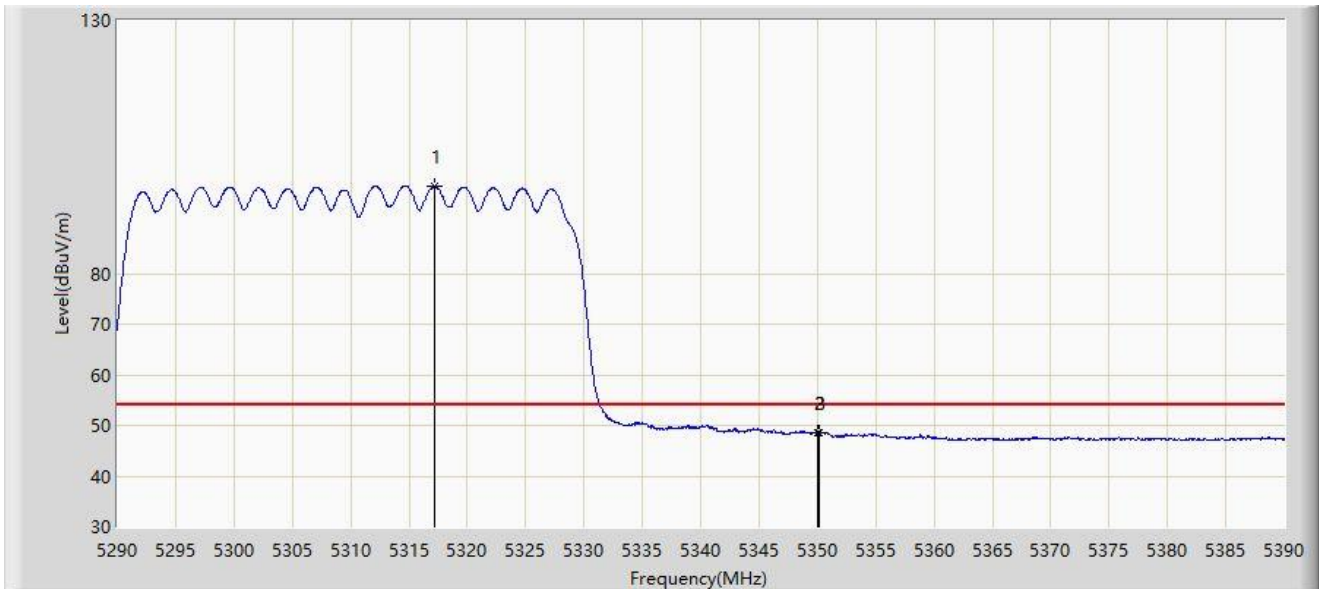


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5317.200        | 97.281                 | 94.285               | N/A         | N/A            | 2.997         | AV   |
| 2  |      | 5350.000        | 48.647                 | 45.827               | -5.353      | 54.000         | 2.820         | AV   |
| 3  | *    | 5350.200        | 48.664                 | 45.848               | -5.336      | 54.000         | 2.816         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5510MHz |                       |

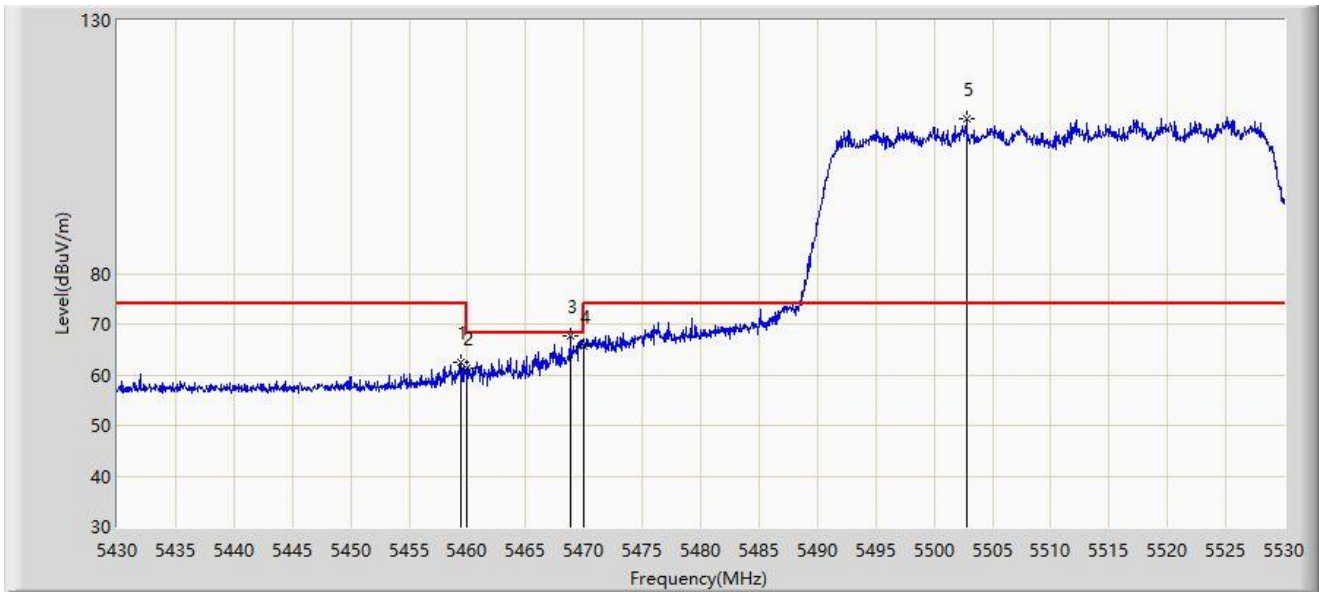


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5459.400        | 62.341                 | 59.203               | -11.659     | 74.000         | 3.137         | PK   |
| 2  |      | 5460.000        | 61.170                 | 58.021               | -12.830     | 74.000         | 3.149         | PK   |
| 3  | *    | 5468.800        | 67.552                 | 64.233               | -0.648      | 68.200         | 3.318         | PK   |
| 4  |      | 5470.000        | 65.717                 | 62.375               | -2.483      | 68.200         | 3.341         | PK   |
| 5  |      | 5502.750        | 110.474                | 107.308              | N/A         | N/A            | 3.166         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5510MHz |                       |

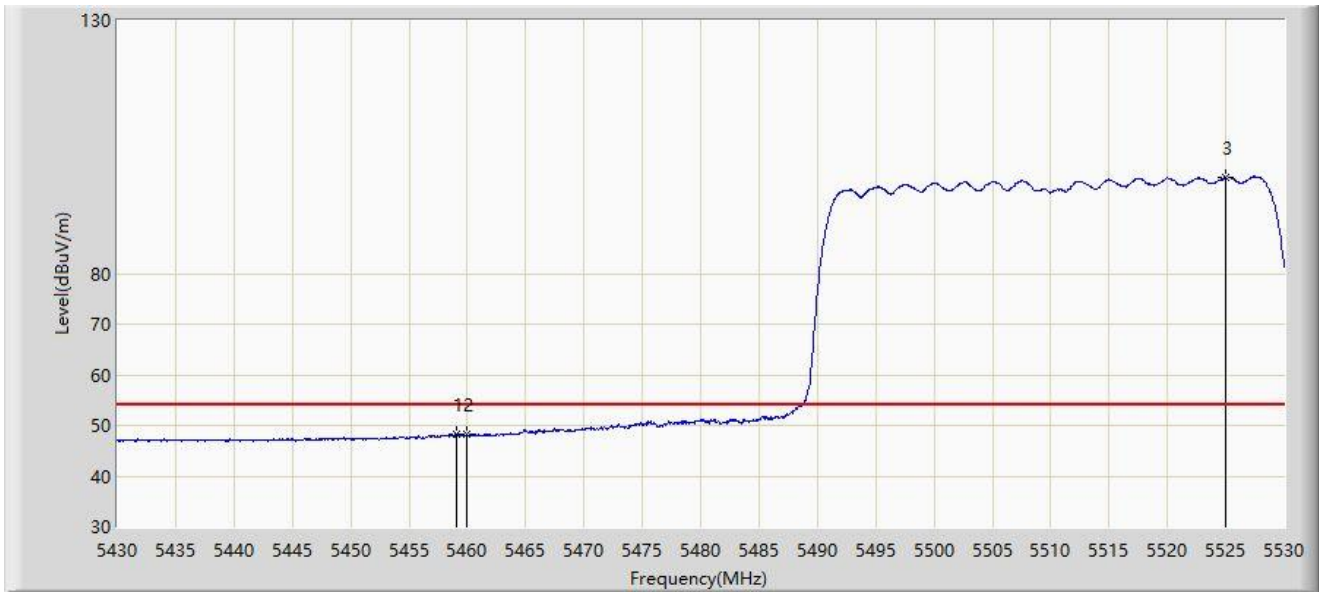


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5459.050        | 48.239                 | 45.108               | -5.761      | 54.000         | 3.130         | AV   |
| 2  |      | 5460.000        | 48.195                 | 45.046               | -5.805      | 54.000         | 3.149         | AV   |
| 3  |      | 5525.050        | 99.130                 | 96.025               | N/A         | N/A            | 3.106         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5510MHz |                       |

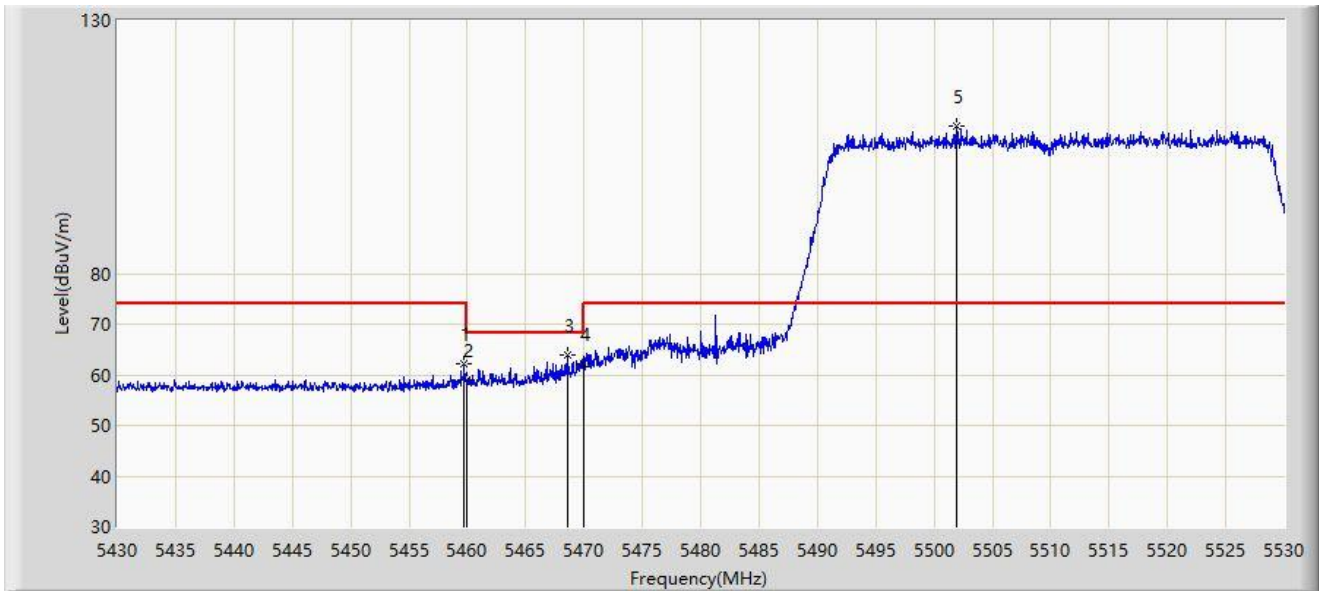


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5459.750        | 62.121                 | 58.977               | -11.879     | 74.000         | 3.144         | PK   |
| 2  |      | 5460.000        | 59.037                 | 55.888               | -14.963     | 74.000         | 3.149         | PK   |
| 3  | *    | 5468.550        | 63.830                 | 60.516               | -4.370      | 68.200         | 3.314         | PK   |
| 4  |      | 5470.000        | 62.238                 | 58.896               | -5.962      | 68.200         | 3.341         | PK   |
| 5  |      | 5501.950        | 109.062                | 105.890              | N/A         | N/A            | 3.172         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5510MHz |                       |

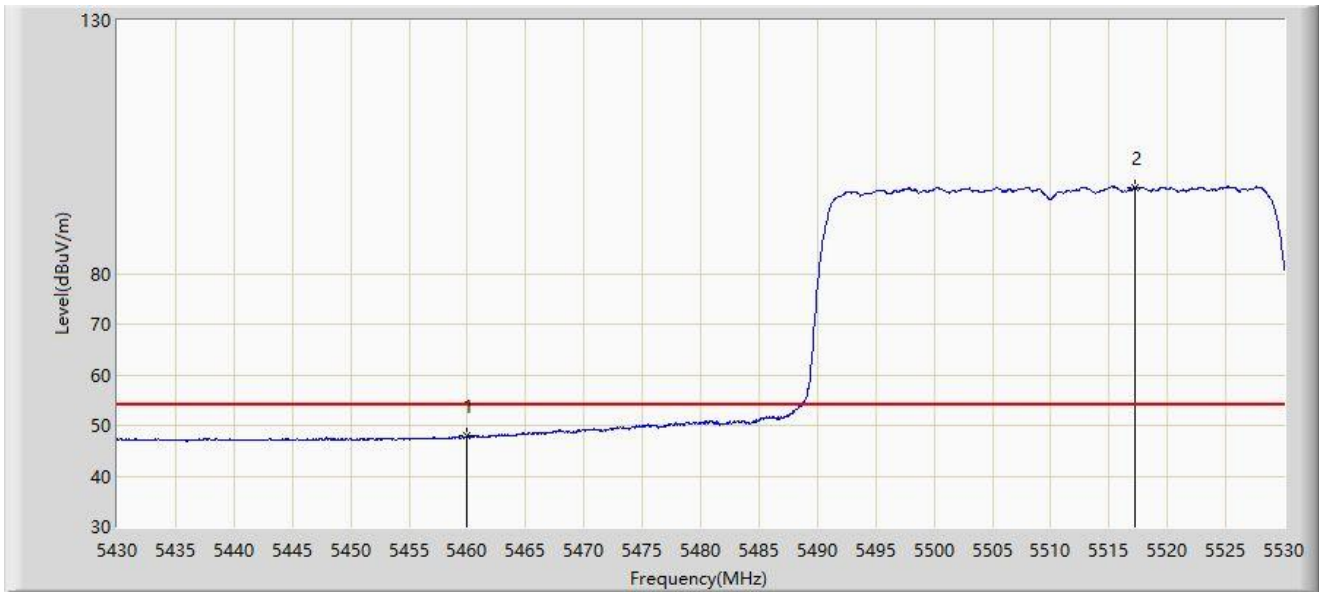


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5460.000        | 48.022                 | 44.873               | -5.978      | 54.000         | 3.149         | AV   |
| 2  |      | 5517.200        | 96.941                 | 93.880               | N/A         | N/A            | 3.061         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5670MHz |                       |

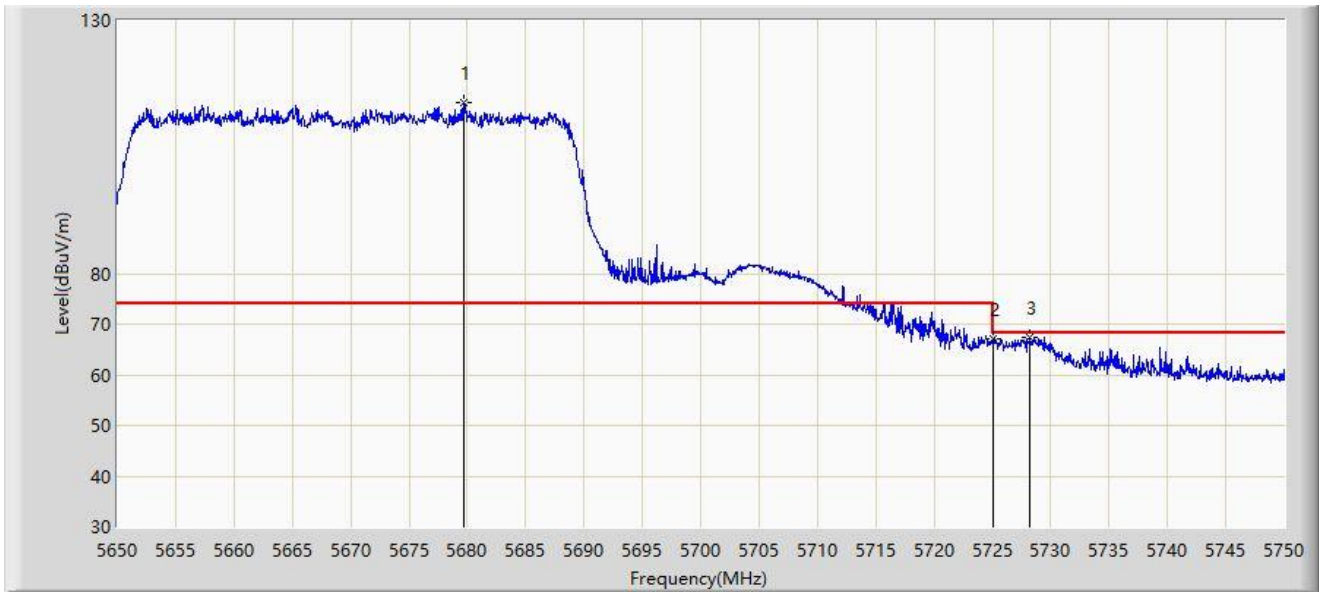


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5679.650        | 113.736                | 109.640              | N/A         | N/A            | 4.095         | PK   |
| 2  |      | 5725.000        | 67.090                 | 62.387               | -1.110      | 68.200         | 4.703         | PK   |
| 3  | *    | 5728.200        | 67.473                 | 62.797               | -0.727      | 68.200         | 4.676         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5670MHz |                       |

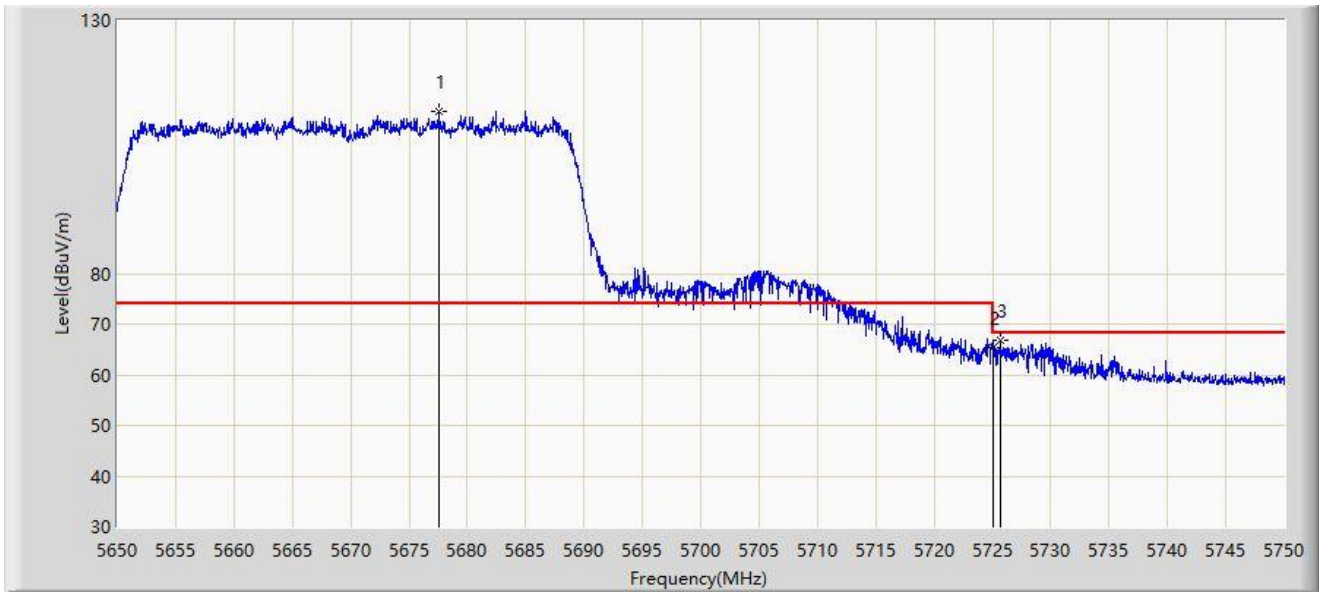


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5677.550        | 111.894                | 107.835              | N/A         | N/A            | 4.060         | PK   |
| 2  |      | 5725.000        | 65.381                 | 60.678               | -2.819      | 68.200         | 4.703         | PK   |
| 3  | *    | 5725.650        | 66.742                 | 62.034               | -1.458      | 68.200         | 4.708         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                           | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5755MHz |                       |

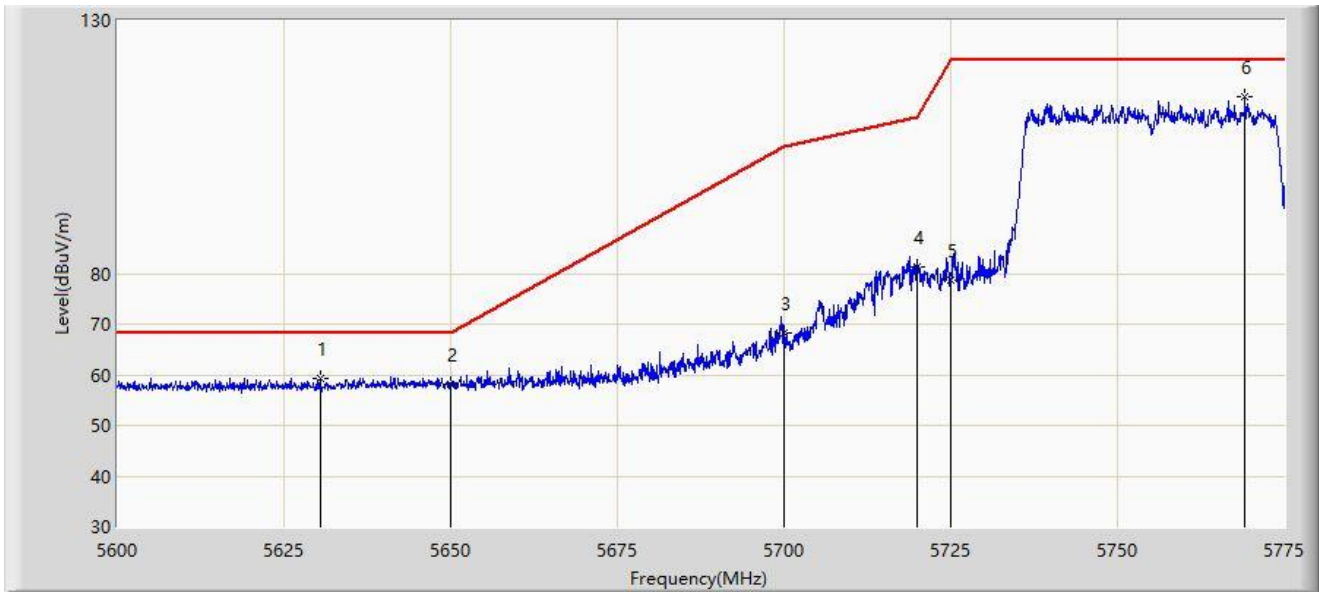


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5630.450        | 59.256                 | 55.222               | -8.944      | 68.200         | 4.034         | PK   |
| 2  |      | 5650.000        | 57.996                 | 53.873               | -10.204     | 68.200         | 4.122         | PK   |
| 3  |      | 5700.000        | 68.253                 | 63.816               | -36.947     | 105.200        | 4.437         | PK   |
| 4  |      | 5720.000        | 81.254                 | 76.590               | -29.546     | 110.800        | 4.663         | PK   |
| 5  |      | 5725.000        | 78.692                 | 73.989               | -43.508     | 122.200        | 4.703         | PK   |
| 6  |      | 5769.138        | 114.991                | 110.229              | N/A         | N/A            | 4.762         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-21 |
| Limit: FCC_5.8G_RE(3m)                           | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5755MHz |                       |

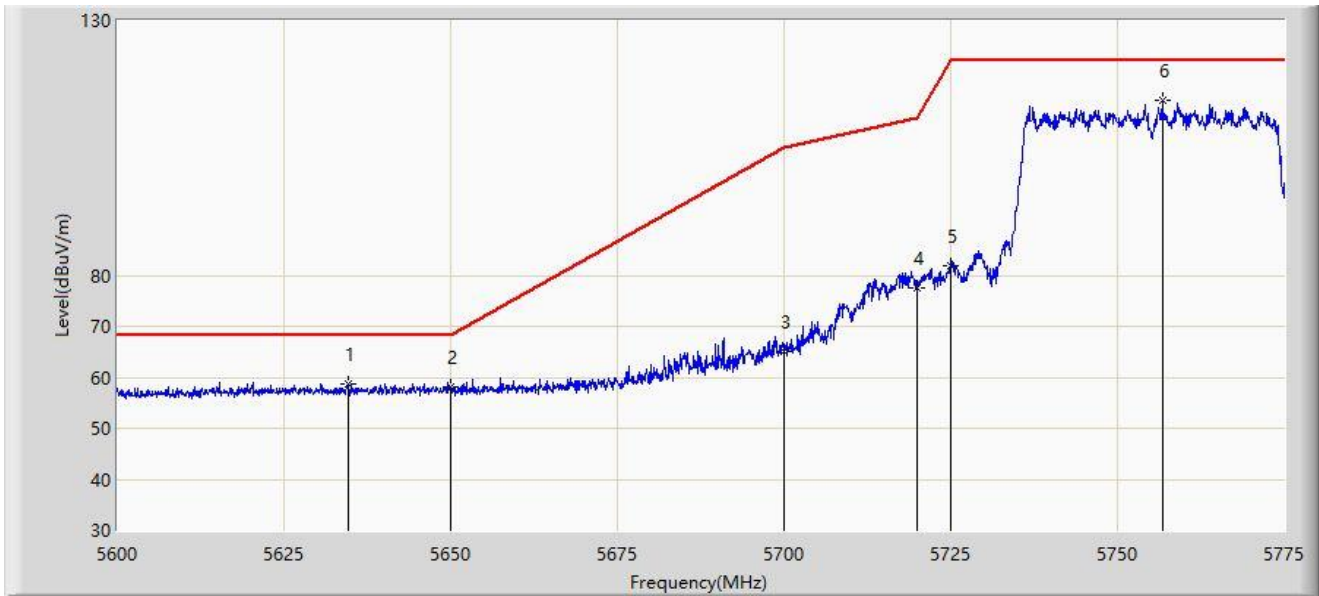


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5634.650        | 58.752                 | 54.667               | -9.448      | 68.200         | 4.085         | PK   |
| 2  |      | 5650.000        | 57.987                 | 53.864               | -10.213     | 68.200         | 4.122         | PK   |
| 3  |      | 5700.000        | 65.146                 | 60.709               | -40.054     | 105.200        | 4.437         | PK   |
| 4  |      | 5720.000        | 77.595                 | 72.931               | -33.205     | 110.800        | 4.663         | PK   |
| 5  |      | 5725.000        | 81.913                 | 77.210               | -40.287     | 122.200        | 4.703         | PK   |
| 6  |      | 5756.800        | 114.364                | 109.803              | N/A         | N/A            | 4.561         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-21 |
| Limit: FCC_5.8G_RE(3m)                           | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5795MHz |                       |

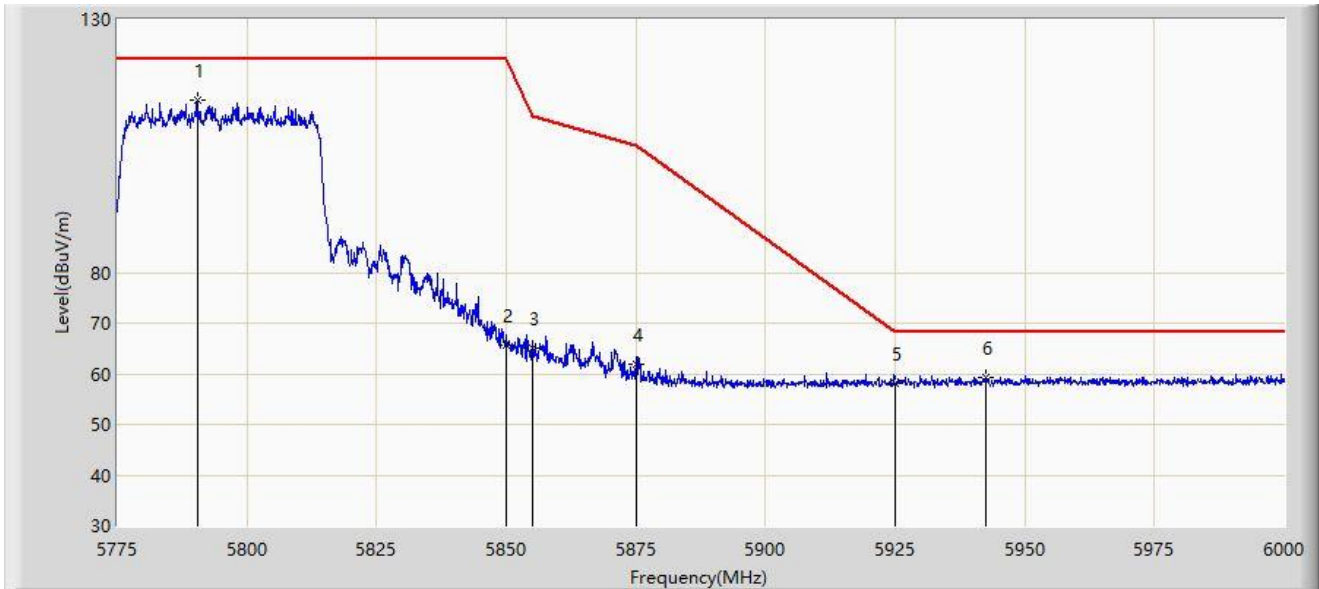


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5790.413        | 114.029                | 108.996              | N/A         | N/A            | 5.033         | PK   |
| 2  |      | 5850.000        | 65.608                 | 60.625               | -56.592     | 122.200        | 4.984         | PK   |
| 3  |      | 5855.000        | 65.013                 | 59.975               | -45.787     | 110.800        | 5.038         | PK   |
| 4  |      | 5875.000        | 61.767                 | 56.636               | -43.433     | 105.200        | 5.131         | PK   |
| 5  |      | 5925.000        | 57.986                 | 52.751               | -10.214     | 68.200         | 5.236         | PK   |
| 6  | *    | 5942.400        | 59.377                 | 54.081               | -8.823      | 68.200         | 5.296         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-21 |
| Limit: FCC_5.8G_RE(3m)                           | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT40 at 5795MHz |                       |

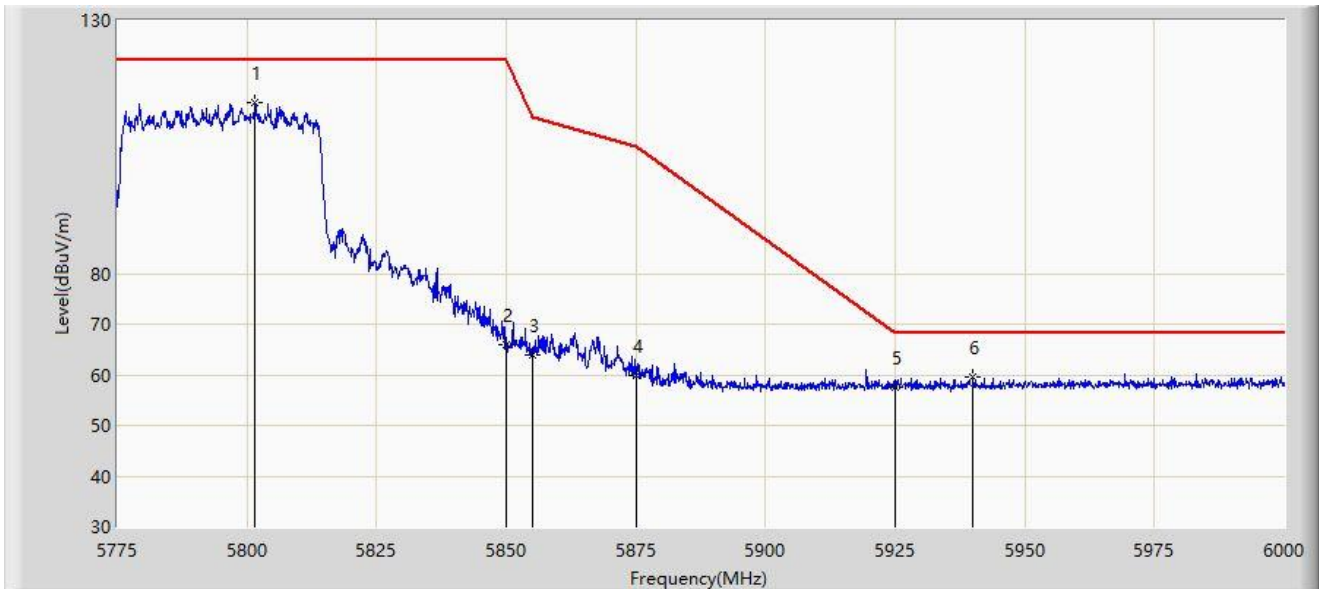


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5801.550        | 113.751                | 108.688              | N/A         | N/A            | 5.063         | PK   |
| 2  |      | 5850.000        | 65.970                 | 60.987               | -56.230     | 122.200        | 4.984         | PK   |
| 3  |      | 5855.000        | 63.784                 | 58.746               | -47.016     | 110.800        | 5.038         | PK   |
| 4  |      | 5875.000        | 59.798                 | 54.667               | -45.402     | 105.200        | 5.131         | PK   |
| 5  |      | 5925.000        | 57.507                 | 52.272               | -10.693     | 68.200         | 5.236         | PK   |
| 6  | *    | 5940.038        | 59.703                 | 54.414               | -8.497      | 68.200         | 5.289         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5210MHz |                       |

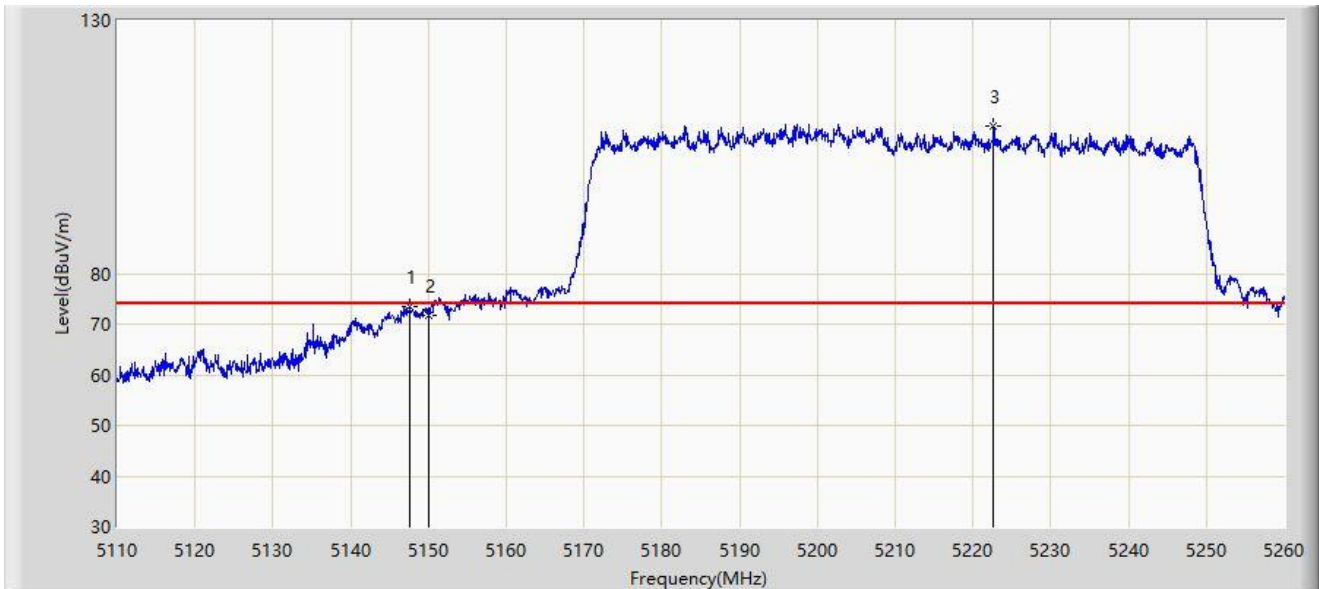


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5147.650        | 73.351                 | 69.880               | -0.649      | 74.000         | 3.472         | PK   |
| 2  |      | 5150.000        | 71.617                 | 68.135               | -2.383      | 74.000         | 3.482         | PK   |
| 3  |      | 5222.650        | 109.065                | 106.039              | N/A         | N/A            | 3.026         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5210MHz |                       |

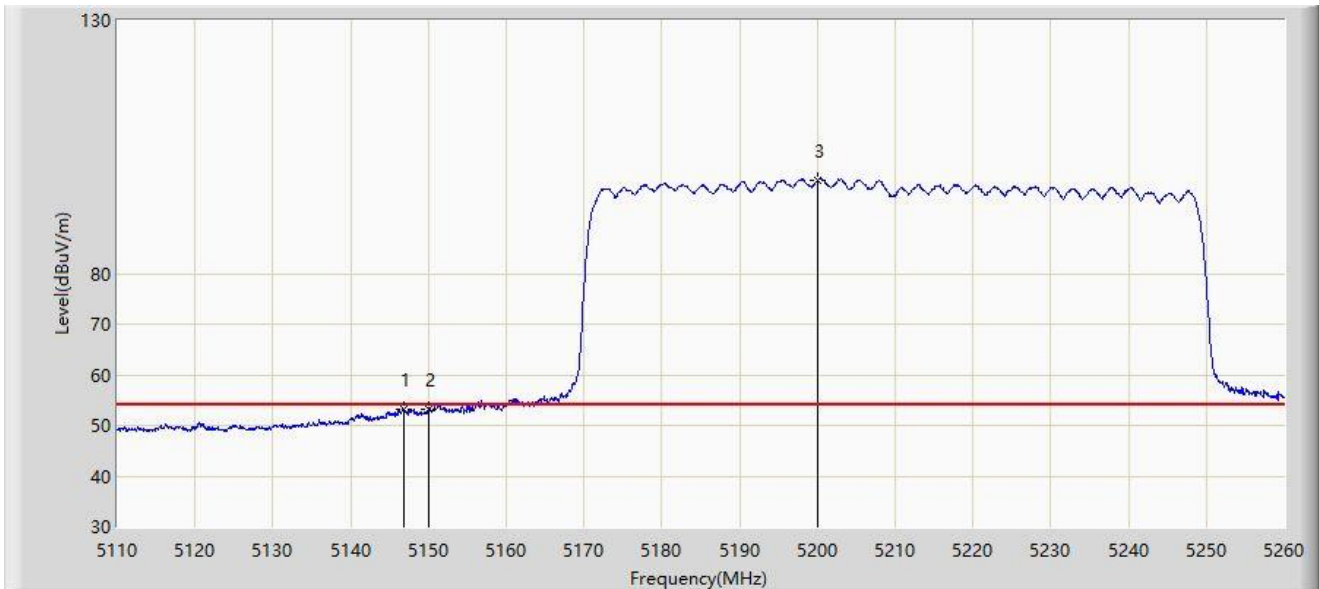


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5146.825        | 53.221                 | 49.760               | -0.779      | 54.000         | 3.460         | AV   |
| 2  |      | 5150.000        | 53.152                 | 49.670               | -0.848      | 54.000         | 3.482         | AV   |
| 3  |      | 5200.075        | 98.503                 | 95.645               | N/A         | N/A            | 2.859         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5210MHz |                       |

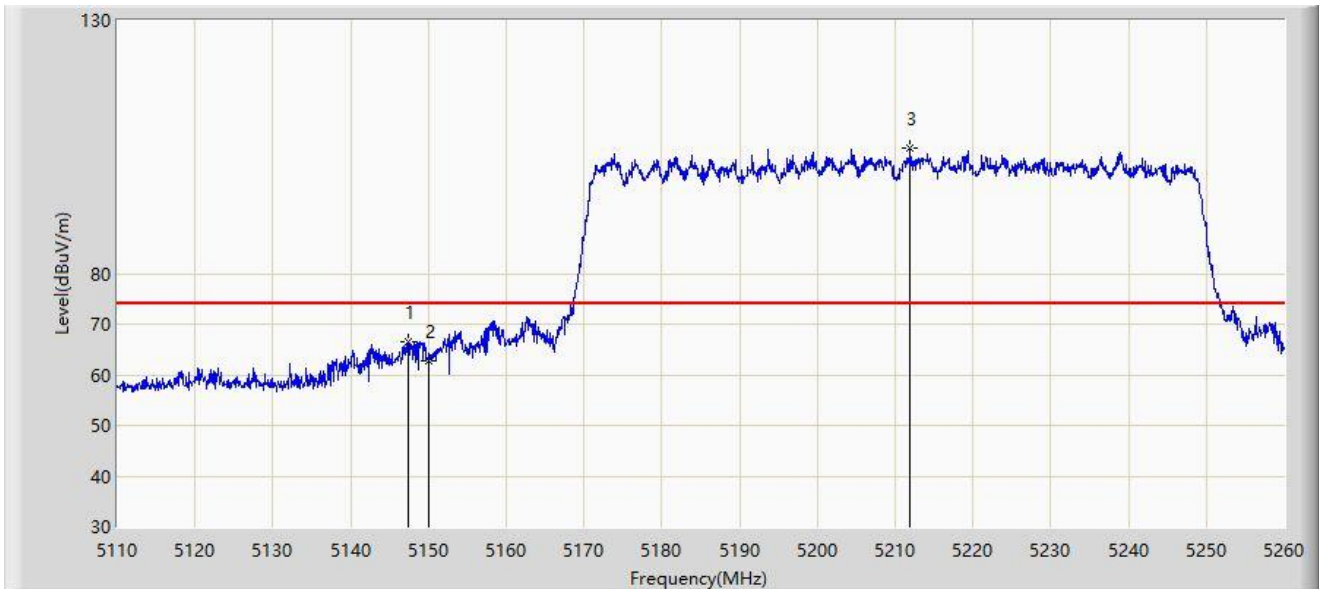


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5147.425        | 66.515                 | 63.047               | -7.485      | 74.000         | 3.469         | PK   |
| 2  |      | 5150.000        | 62.761                 | 59.279               | -11.239     | 74.000         | 3.482         | PK   |
| 3  |      | 5211.925        | 104.878                | 101.974              | N/A         | N/A            | 2.905         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5210MHz |                       |

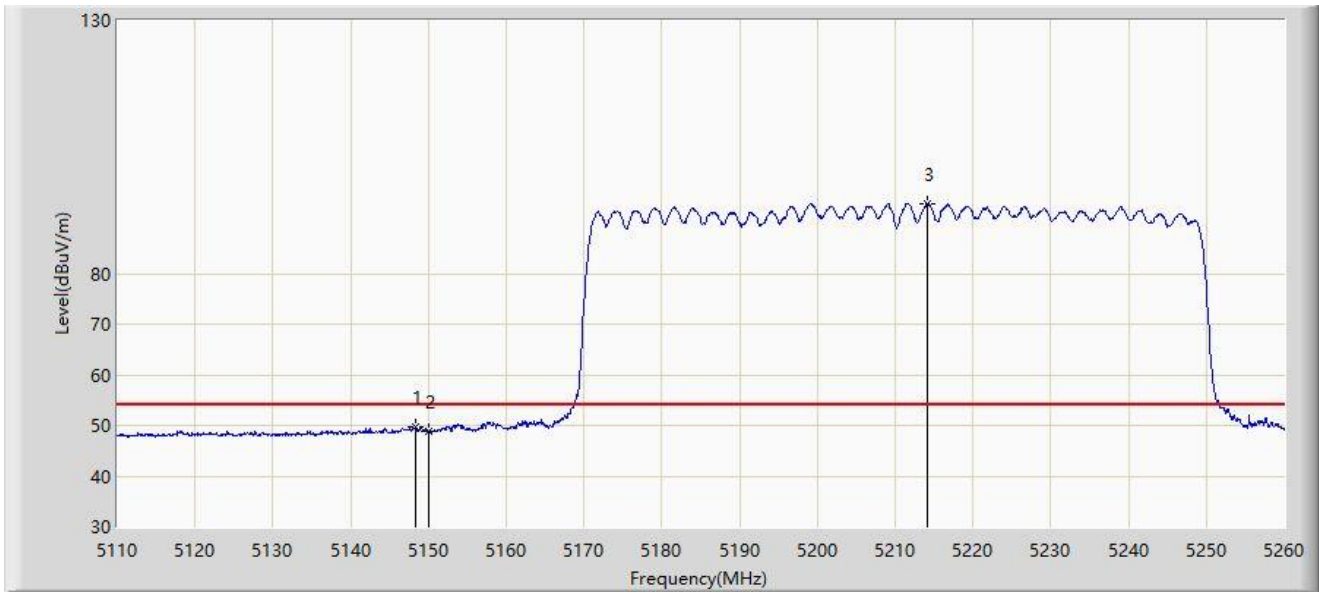


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5148.400        | 49.820                 | 46.343               | -4.180      | 54.000         | 3.478         | AV   |
| 2  |      | 5150.000        | 48.921                 | 45.439               | -5.079      | 54.000         | 3.482         | AV   |
| 3  |      | 5214.175        | 93.898                 | 90.985               | N/A         | N/A            | 2.912         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5290MHz |                       |

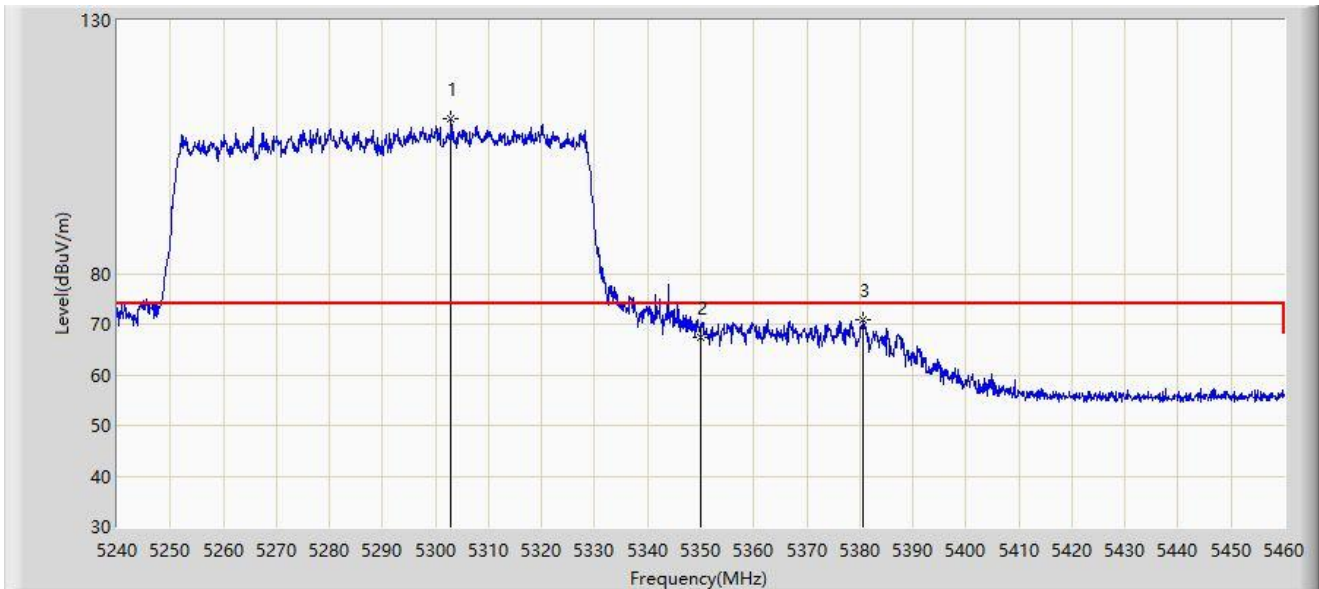


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5302.920        | 110.518                | 107.752              | N/A         | N/A            | 2.767         | PK   |
| 2  |      | 5350.000        | 67.512                 | 64.692               | -6.488      | 74.000         | 2.820         | PK   |
| 3  | *    | 5380.690        | 70.753                 | 67.664               | -3.247      | 74.000         | 3.089         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5290MHz |                       |

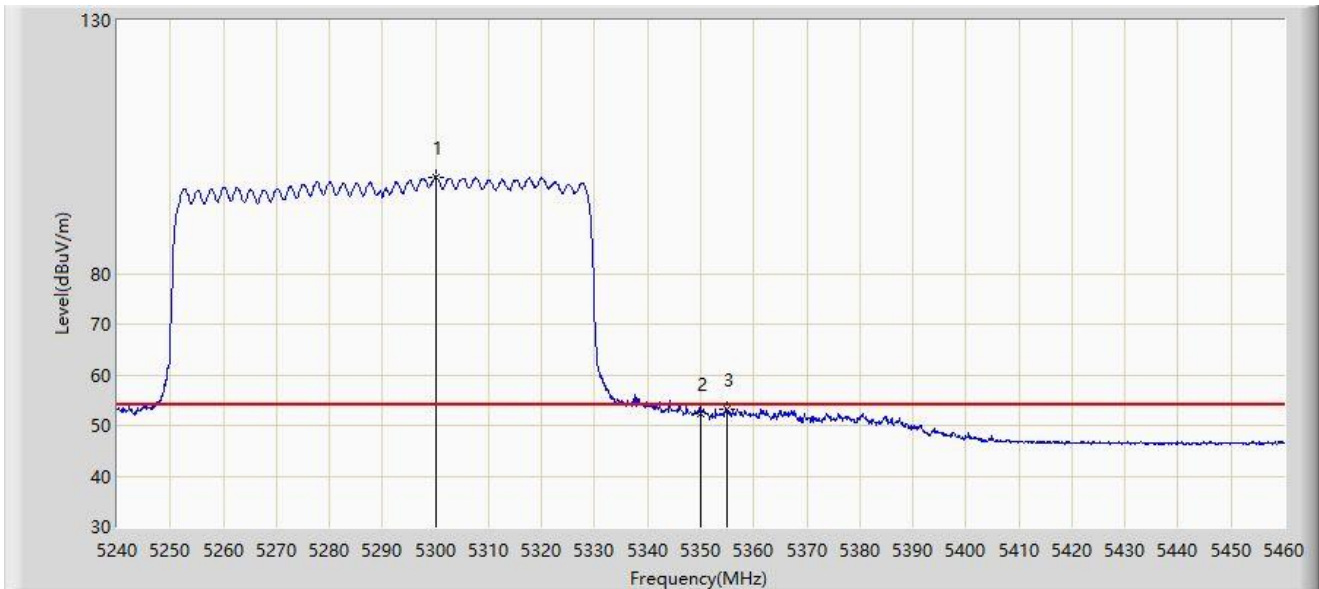


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5300.060        | 99.115                 | 96.389               | N/A         | N/A            | 2.726         | AV   |
| 2  |      | 5350.000        | 52.455                 | 49.635               | -1.545      | 54.000         | 2.820         | AV   |
| 3  | *    | 5354.840        | 53.295                 | 50.496               | -0.705      | 54.000         | 2.799         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5290MHz |                       |

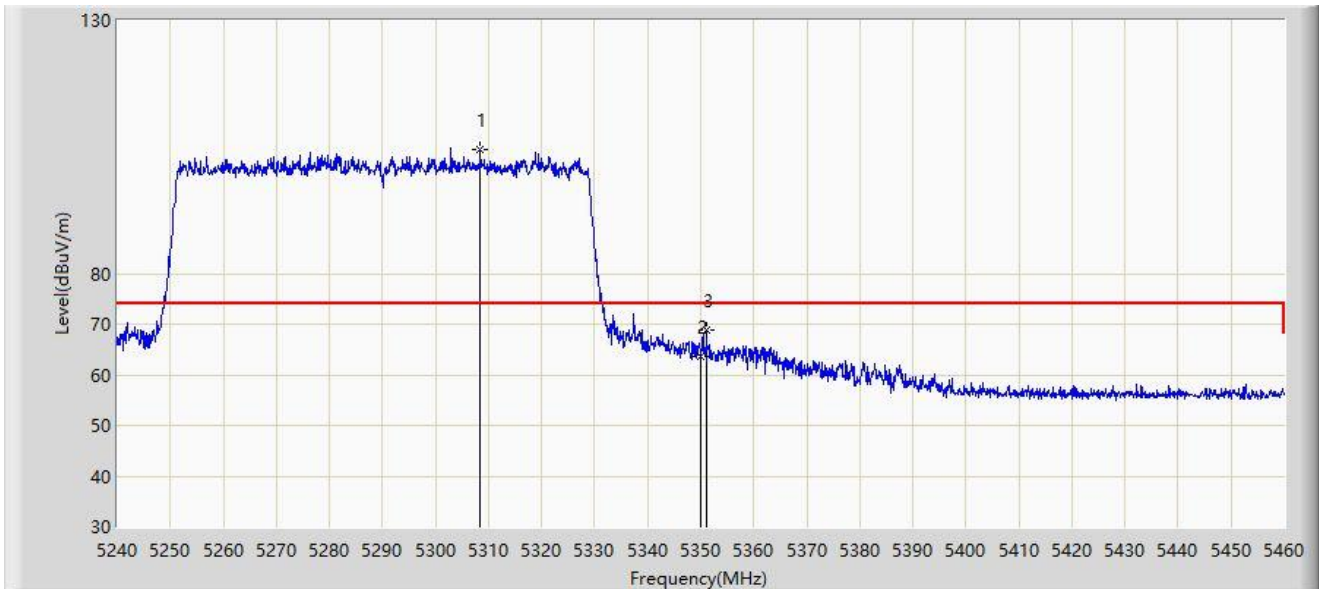


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5308.420        | 104.570                | 101.718              | N/A         | N/A            | 2.851         | PK   |
| 2  |      | 5350.000        | 63.538                 | 60.718               | -10.462     | 74.000         | 2.820         | PK   |
| 3  | *    | 5351.100        | 68.792                 | 65.991               | -5.208      | 74.000         | 2.801         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5290MHz |                       |

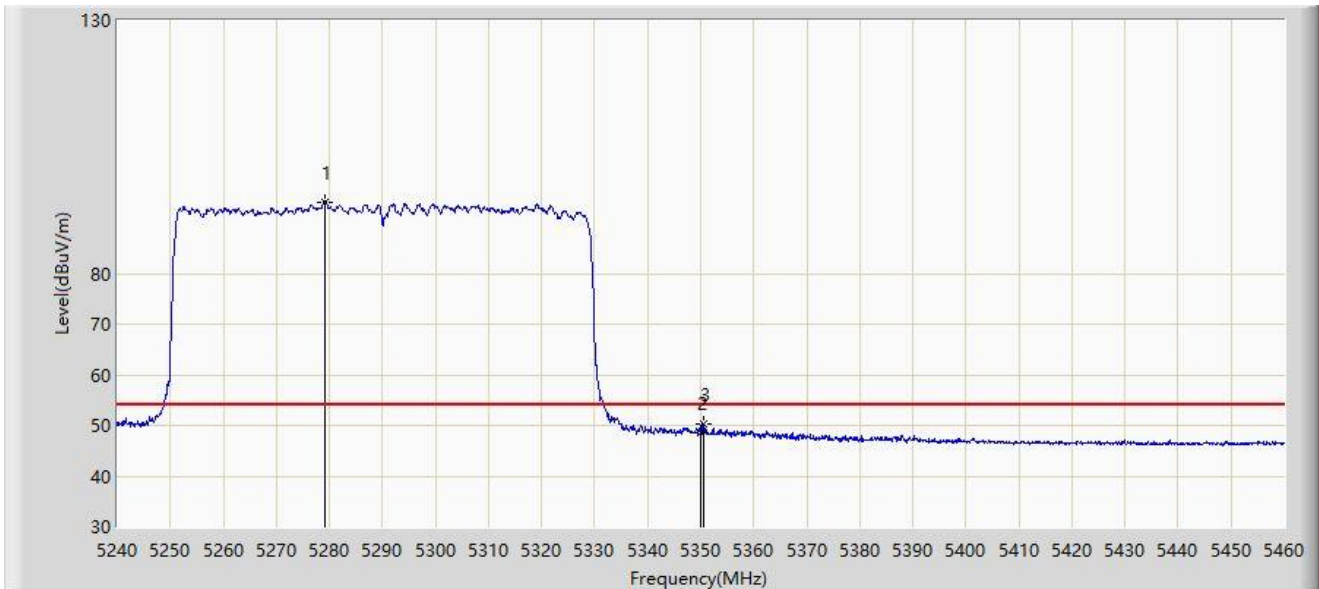


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5279.050        | 94.191                 | 91.638               | N/A         | N/A            | 2.553         | AV   |
| 2  |      | 5350.000        | 48.562                 | 45.742               | -5.438      | 54.000         | 2.820         | AV   |
| 3  | *    | 5350.440        | 50.310                 | 47.498               | -3.690      | 54.000         | 2.813         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5530MHz |                       |

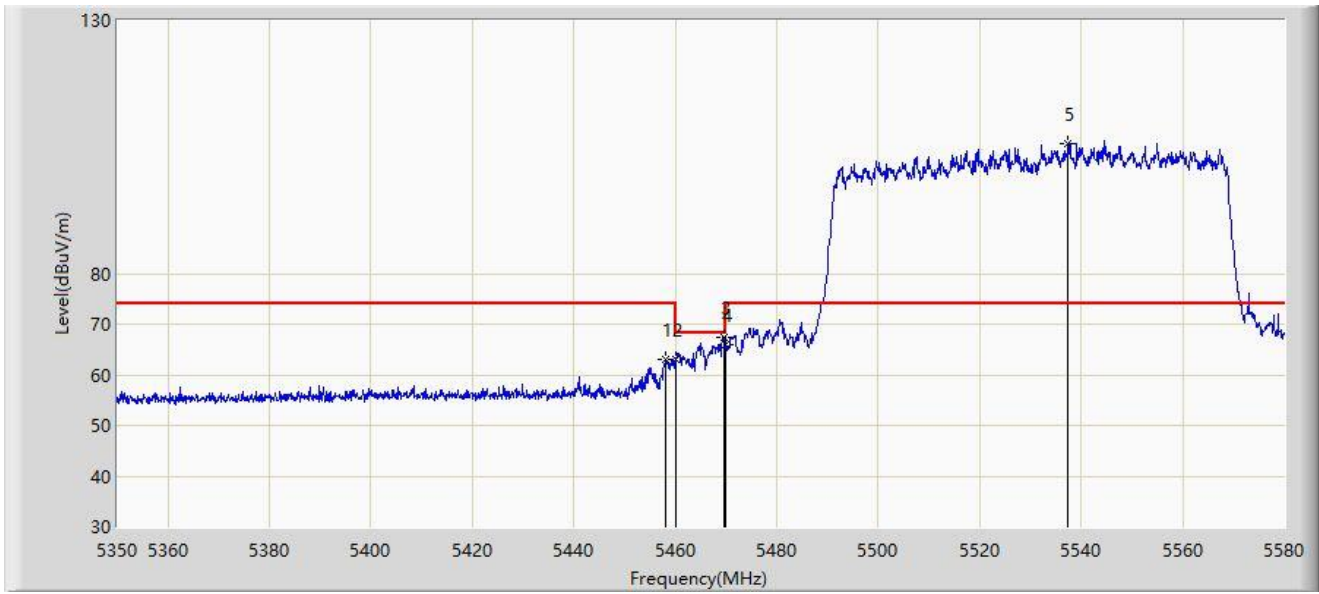


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5457.985        | 63.112                 | 60.002               | -10.888     | 74.000         | 3.110         | PK   |
| 2  |      | 5460.000        | 62.951                 | 59.802               | -11.049     | 74.000         | 3.149         | PK   |
| 3  | *    | 5469.715        | 67.407                 | 64.071               | -0.793      | 68.200         | 3.337         | PK   |
| 4  |      | 5470.000        | 65.895                 | 62.553               | -2.305      | 68.200         | 3.341         | PK   |
| 5  |      | 5537.335        | 105.749                | 102.454              | N/A         | N/A            | 3.296         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5530MHz |                       |

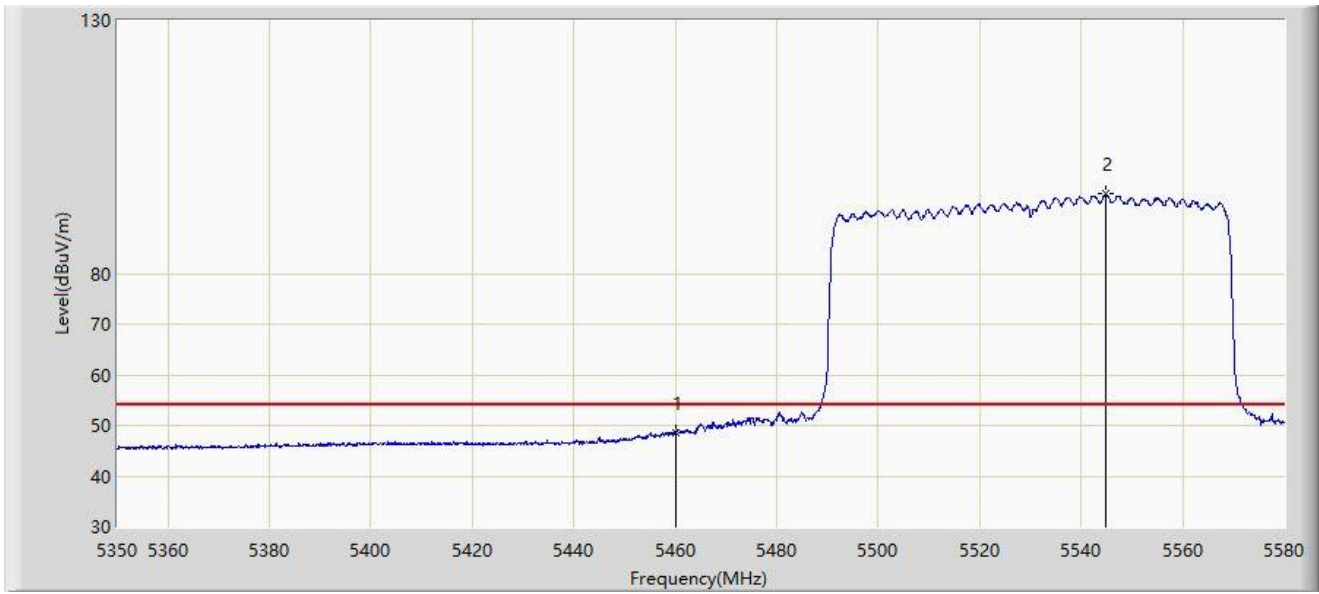


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5460.000        | 48.640                 | 45.491               | -5.360      | 54.000         | 3.149         | AV   |
| 2  |      | 5544.810        | 95.704                 | 92.333               | N/A         | N/A            | 3.371         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5530MHz |                       |

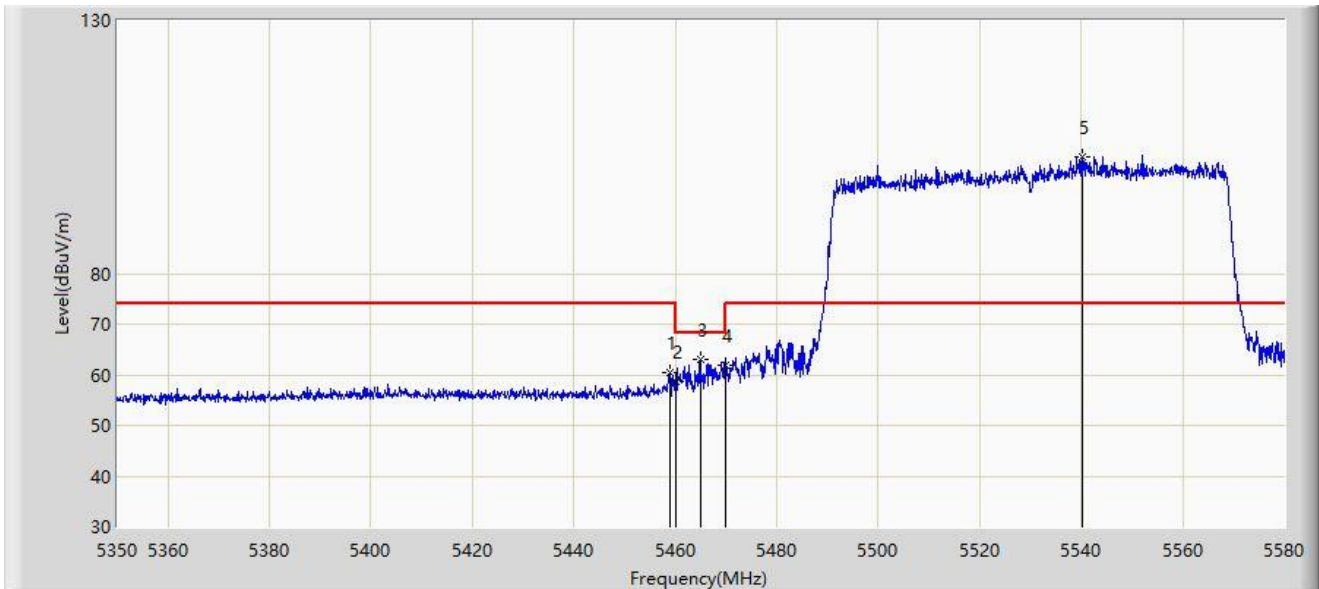


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5458.905        | 60.478                 | 57.350               | -13.522     | 74.000         | 3.128         | PK   |
| 2  |      | 5460.000        | 58.674                 | 55.525               | -15.326     | 74.000         | 3.149         | PK   |
| 3  | *    | 5464.885        | 63.112                 | 59.869               | -5.088      | 68.200         | 3.244         | PK   |
| 4  |      | 5470.000        | 61.803                 | 58.461               | -6.397      | 68.200         | 3.341         | PK   |
| 5  |      | 5540.095        | 102.912                | 99.586               | N/A         | N/A            | 3.326         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5530MHz |                       |

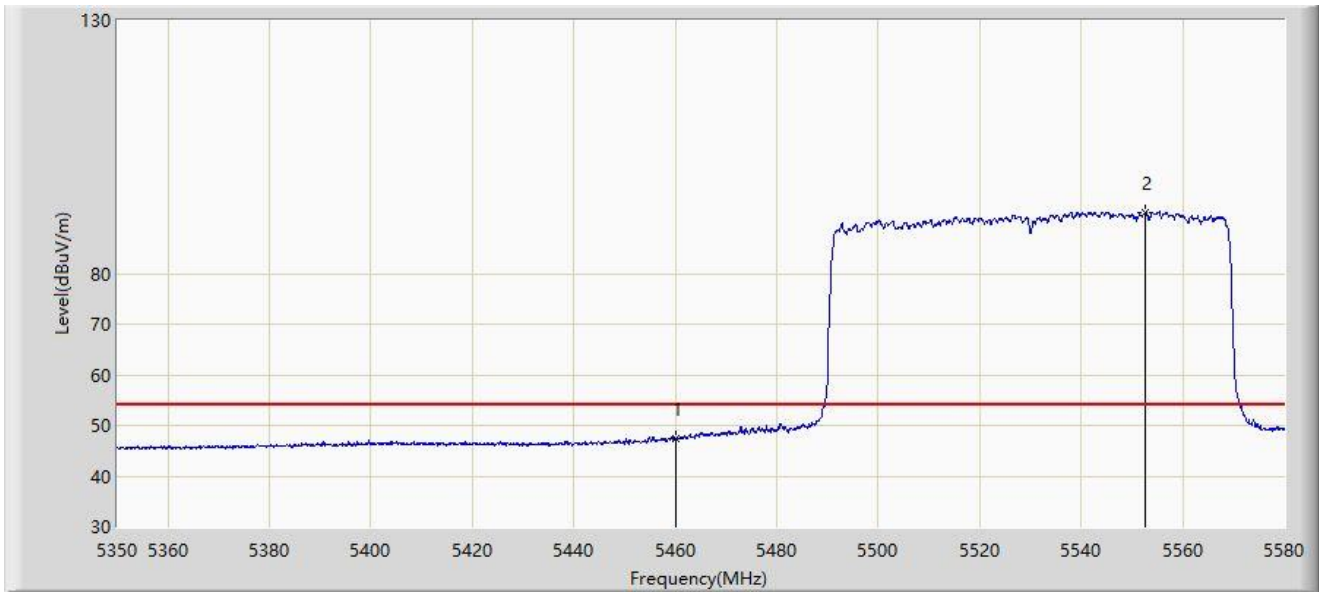


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5460.000        | 47.323                 | 44.174               | -6.677      | 54.000         | 3.149         | AV   |
| 2  |      | 5552.515        | 91.966                 | 88.512               | N/A         | N/A            | 3.454         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5610MHz |                       |

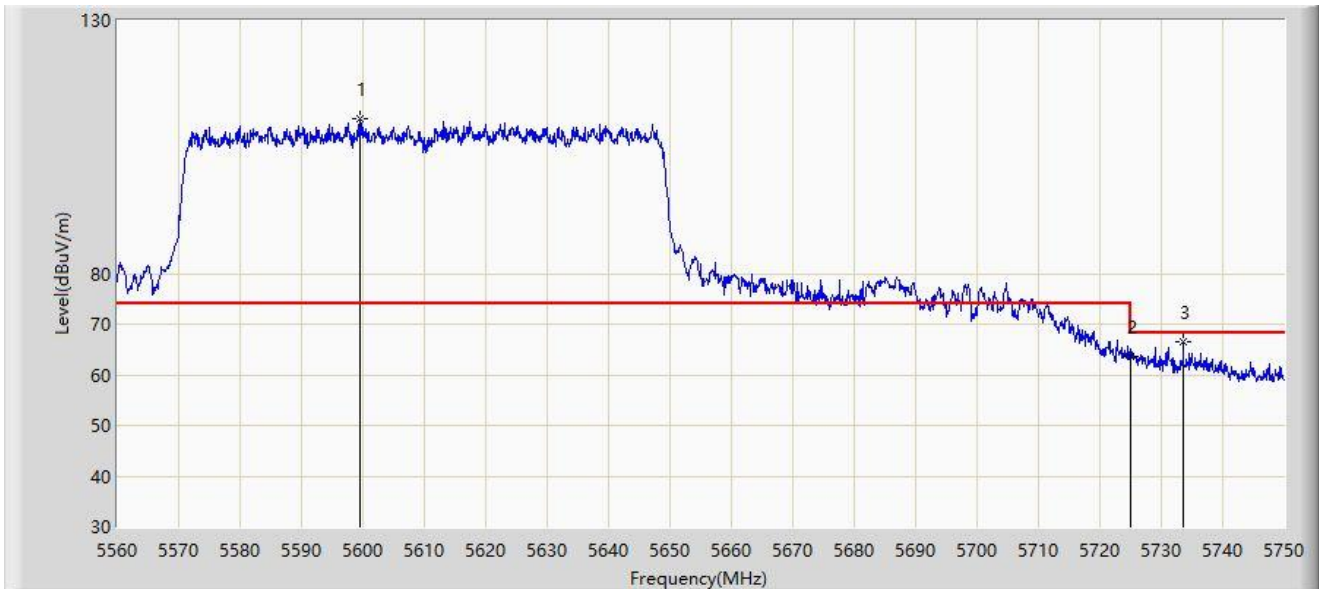


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5599.425        | 110.664                | 107.162              | N/A         | N/A            | 3.503         | PK   |
| 2  |      | 5725.000        | 63.515                 | 58.812               | -4.685      | 68.200         | 4.703         | PK   |
| 3  | *    | 5733.565        | 66.617                 | 62.036               | -1.583      | 68.200         | 4.581         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                             | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5610MHz |                       |

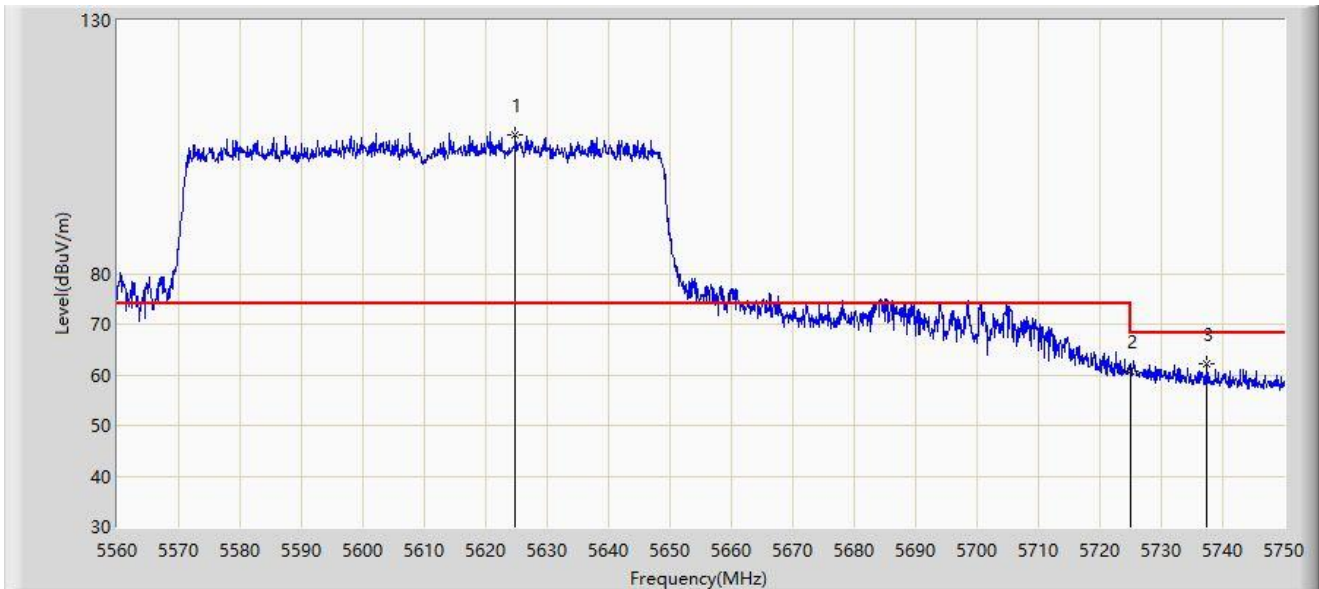


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5624.790        | 107.516                | 103.550              | N/A         | N/A            | 3.965         | PK   |
| 2  |      | 5725.000        | 60.744                 | 56.041               | -7.456      | 68.200         | 4.703         | PK   |
| 3  | *    | 5737.460        | 62.300                 | 57.788               | -5.900      | 68.200         | 4.513         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                           | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Horizontal  |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5775MHz |                       |

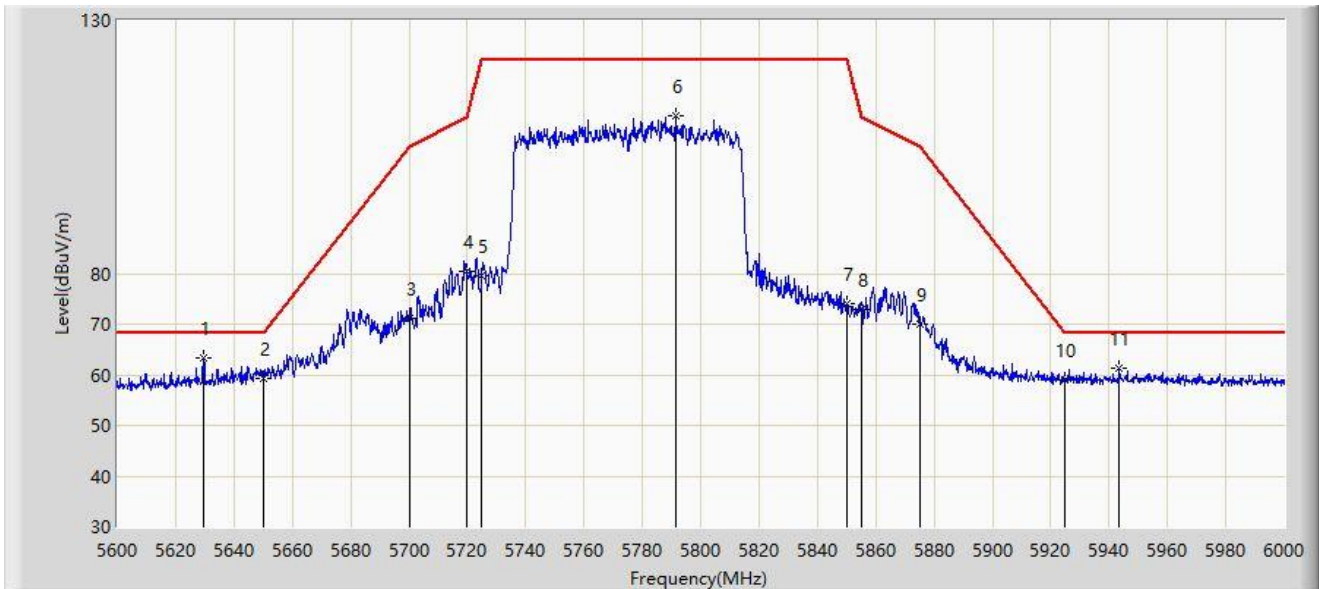


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5629.400        | 63.468                 | 59.447               | -4.732      | 68.200         | 4.021         | PK   |
| 2  |      | 5650.000        | 59.342                 | 55.219               | -8.858      | 68.200         | 4.122         | PK   |
| 3  |      | 5700.000        | 71.255                 | 66.818               | -33.945     | 105.200        | 4.437         | PK   |
| 4  |      | 5720.000        | 80.309                 | 75.645               | -30.491     | 110.800        | 4.663         | PK   |
| 5  |      | 5725.000        | 79.686                 | 74.983               | -42.514     | 122.200        | 4.703         | PK   |
| 6  |      | 5791.400        | 111.060                | 106.016              | N/A         | N/A            | 5.045         | PK   |
| 7  |      | 5850.000        | 74.121                 | 69.138               | -48.079     | 122.200        | 4.984         | PK   |
| 8  |      | 5855.000        | 72.788                 | 67.750               | -38.012     | 110.800        | 5.038         | PK   |
| 9  |      | 5875.000        | 69.903                 | 64.772               | -35.297     | 105.200        | 5.131         | PK   |
| 10 |      | 5925.000        | 59.090                 | 53.855               | -9.110      | 68.200         | 5.236         | PK   |
| 11 |      | 5943.600        | 61.195                 | 55.886               | -7.005      | 68.200         | 5.310         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                  |                       |
|--------------------------------------------------|-----------------------|
| Site: WZ-AC2                                     | Test Date: 2023-11-20 |
| Limit: FCC_5.8G_RE(3m)                           | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                    | Polarity: Vertical    |
| EUT: ACCESS POINT                                | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5775MHz |                       |

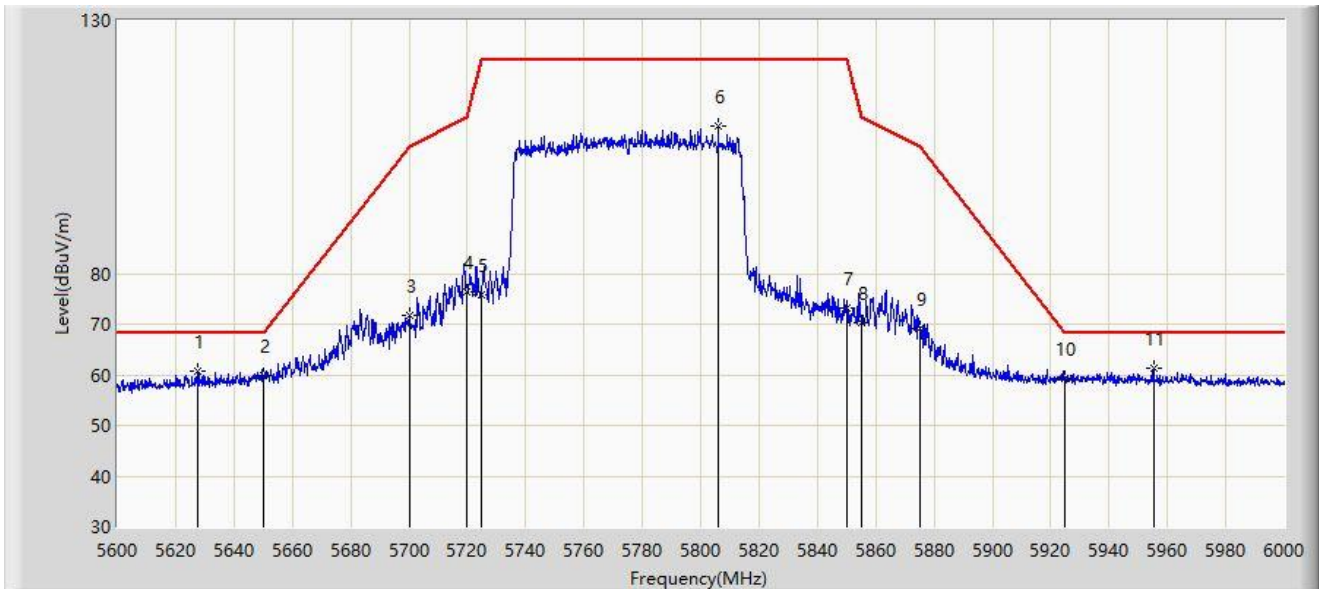


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5627.600        | 60.786                 | 56.786               | -7.414      | 68.200         | 4.000         | PK   |
| 2  |      | 5650.000        | 59.954                 | 55.831               | -8.246      | 68.200         | 4.122         | PK   |
| 3  |      | 5700.000        | 71.691                 | 67.254               | -33.509     | 105.200        | 4.437         | PK   |
| 4  |      | 5720.000        | 76.394                 | 71.730               | -34.406     | 110.800        | 4.663         | PK   |
| 5  |      | 5725.000        | 75.754                 | 71.051               | -46.446     | 122.200        | 4.703         | PK   |
| 6  |      | 5806.000        | 109.072                | 104.024              | N/A         | N/A            | 5.048         | PK   |
| 7  |      | 5850.000        | 73.226                 | 68.243               | -48.974     | 122.200        | 4.984         | PK   |
| 8  |      | 5855.000        | 70.284                 | 65.246               | -40.516     | 110.800        | 5.038         | PK   |
| 9  |      | 5875.000        | 69.146                 | 64.015               | -36.054     | 105.200        | 5.131         | PK   |
| 10 |      | 5925.000        | 59.220                 | 53.985               | -8.980      | 68.200         | 5.236         | PK   |
| 11 | *    | 5955.200        | 61.297                 | 55.921               | -6.903      | 68.200         | 5.376         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                   |                       |
|---------------------------------------------------|-----------------------|
| Site: WZ-AC2                                      | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                              | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                     | Polarity: Horizontal  |
| EUT: ACCESS POINT                                 | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT160 at 5250MHz |                       |

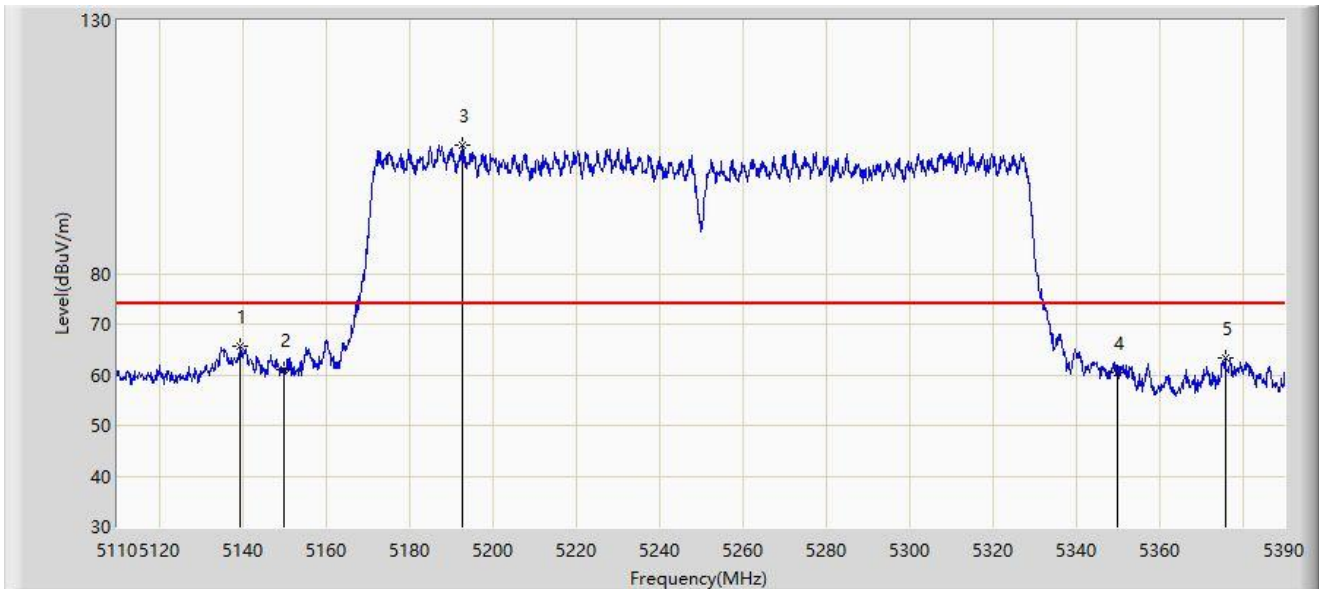


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5139.540        | 65.747                 | 62.378               | -8.253      | 74.000         | 3.369         | PK   |
| 2  |      | 5150.000        | 61.074                 | 57.592               | -12.926     | 74.000         | 3.482         | PK   |
| 3  |      | 5192.880        | 105.482                | 102.495              | N/A         | N/A            | 2.987         | PK   |
| 4  |      | 5350.000        | 60.395                 | 57.575               | -13.605     | 74.000         | 2.820         | PK   |
| 5  |      | 5376.000        | 63.315                 | 60.318               | -10.685     | 74.000         | 2.997         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                   |                       |
|---------------------------------------------------|-----------------------|
| Site: WZ-AC2                                      | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                              | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                     | Polarity: Horizontal  |
| EUT: ACCESS POINT                                 | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT160 at 5250MHz |                       |

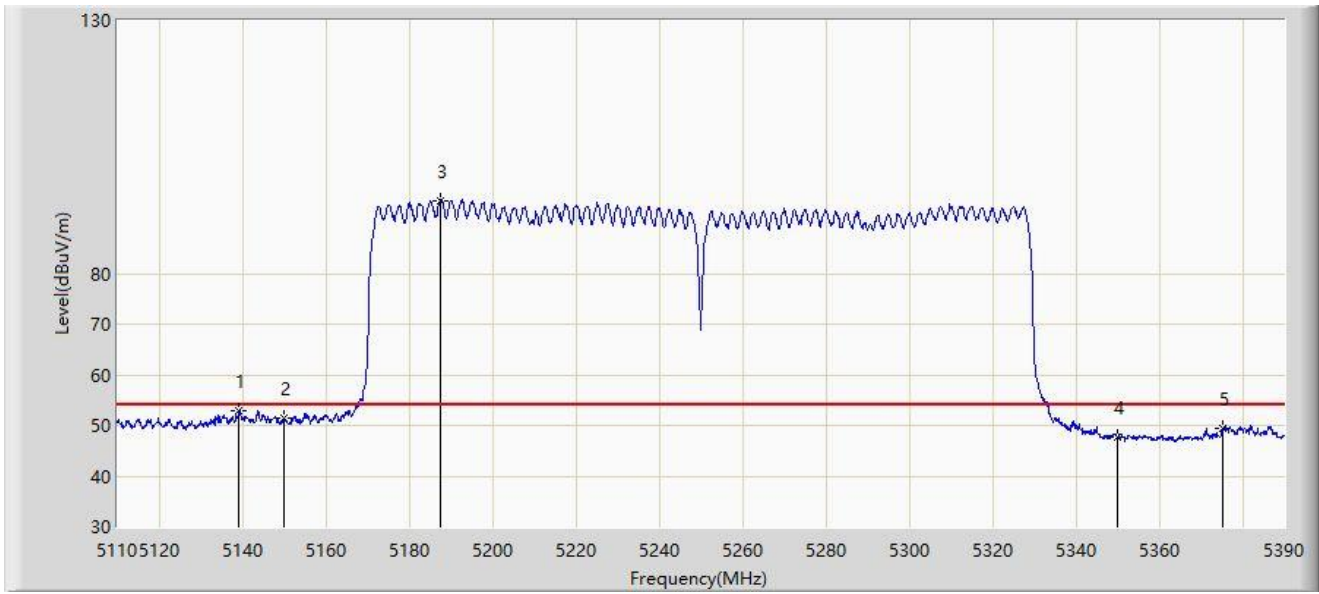


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5139.120        | 53.013                 | 49.650               | -0.987      | 54.000         | 3.363         | AV   |
| 2  |      | 5150.000        | 51.315                 | 47.833               | -2.685      | 54.000         | 3.482         | AV   |
| 3  |      | 5187.420        | 94.480                 | 91.375               | N/A         | N/A            | 3.105         | AV   |
| 4  |      | 5350.000        | 47.591                 | 44.771               | -6.409      | 54.000         | 2.820         | AV   |
| 5  |      | 5375.300        | 49.511                 | 46.527               | -4.489      | 54.000         | 2.984         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                   |                       |
|---------------------------------------------------|-----------------------|
| Site: WZ-AC2                                      | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                              | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                     | Polarity: Vertical    |
| EUT: ACCESS POINT                                 | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT160 at 5250MHz |                       |

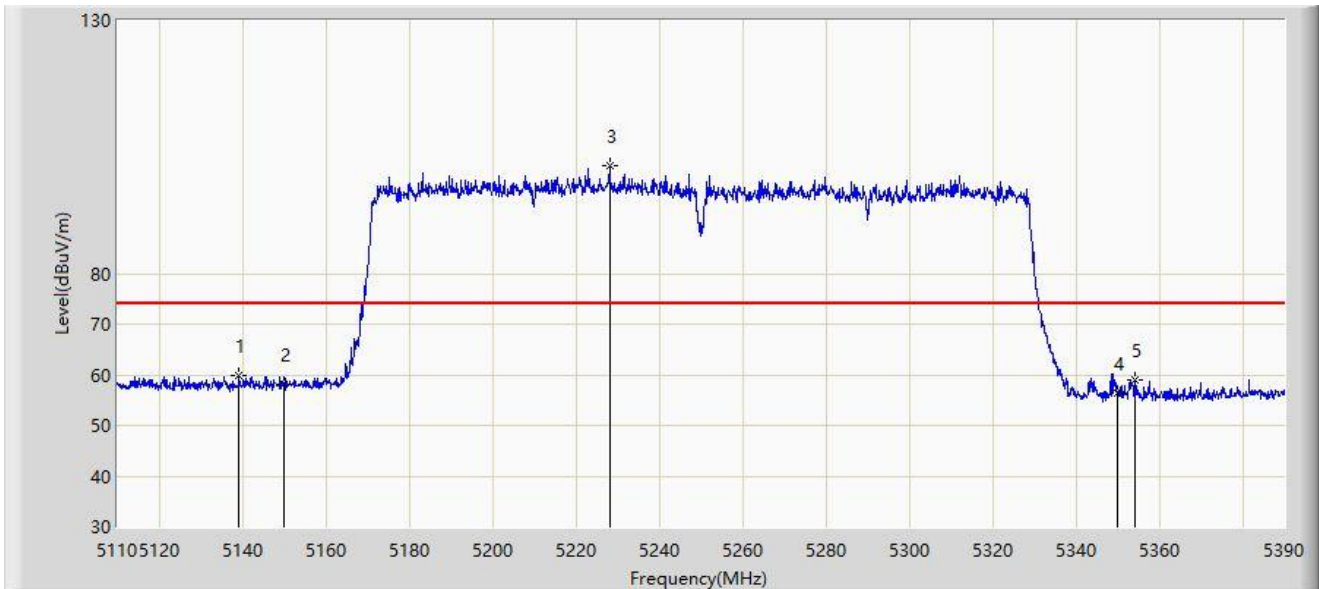


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5139.260        | 59.777                 | 56.412               | -14.223     | 74.000         | 3.364         | PK   |
| 2  |      | 5150.000        | 58.132                 | 54.650               | -15.868     | 74.000         | 3.482         | PK   |
| 3  |      | 5228.160        | 101.163                | 98.029               | N/A         | N/A            | 3.134         | PK   |
| 4  |      | 5350.000        | 56.336                 | 53.516               | -17.664     | 74.000         | 2.820         | PK   |
| 5  |      | 5354.160        | 59.044                 | 56.248               | -14.956     | 74.000         | 2.796         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                   |                       |
|---------------------------------------------------|-----------------------|
| Site: WZ-AC2                                      | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                              | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                     | Polarity: Vertical    |
| EUT: ACCESS POINT                                 | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT160 at 5250MHz |                       |

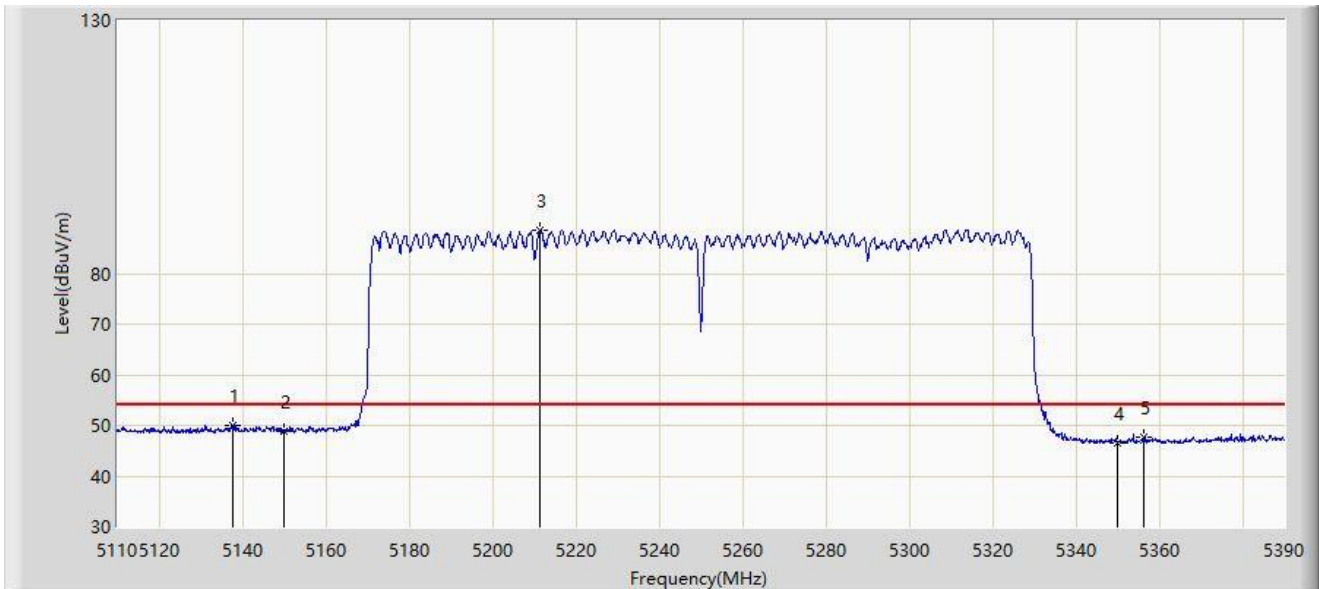


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5137.720        | 50.043                 | 46.697               | -3.957      | 54.000         | 3.345         | AV   |
| 2  |      | 5150.000        | 48.941                 | 45.459               | -5.059      | 54.000         | 3.482         | AV   |
| 3  |      | 5211.500        | 88.650                 | 85.747               | N/A         | N/A            | 2.903         | AV   |
| 4  |      | 5350.000        | 46.629                 | 43.809               | -7.371      | 54.000         | 2.820         | AV   |
| 5  |      | 5356.400        | 47.780                 | 44.974               | -6.220      | 54.000         | 2.806         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                   |                       |
|---------------------------------------------------|-----------------------|
| Site: WZ-AC2                                      | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                              | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                     | Polarity: Horizontal  |
| EUT: ACCESS POINT                                 | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT160 at 5570MHz |                       |

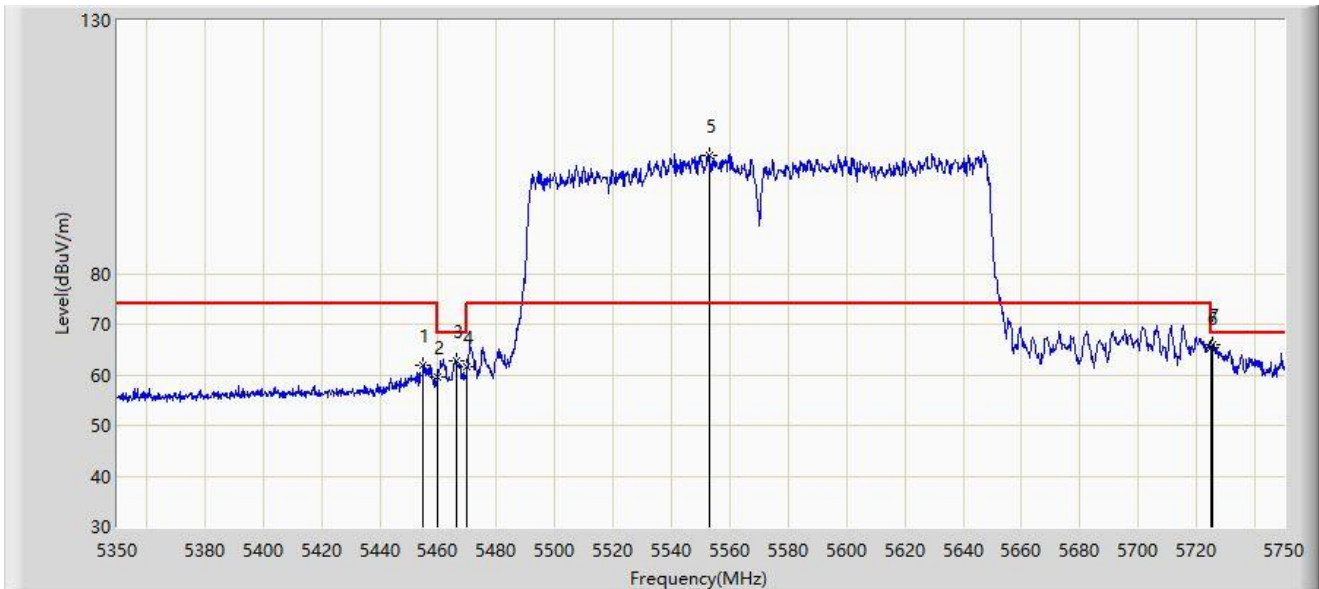


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5454.800        | 61.784                 | 58.727               | -12.216     | 74.000         | 3.056         | PK   |
| 2  |      | 5460.000        | 59.647                 | 56.498               | -14.353     | 74.000         | 3.149         | PK   |
| 3  |      | 5466.400        | 62.821                 | 59.548               | -5.379      | 68.200         | 3.272         | PK   |
| 4  |      | 5470.000        | 61.640                 | 58.298               | -6.560      | 68.200         | 3.341         | PK   |
| 5  |      | 5552.800        | 103.412                | 99.955               | N/A         | N/A            | 3.456         | PK   |
| 6  |      | 5725.000        | 65.304                 | 60.601               | -2.896      | 68.200         | 4.703         | PK   |
| 7  | *    | 5725.600        | 66.038                 | 61.330               | -2.162      | 68.200         | 4.708         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                   |                       |
|---------------------------------------------------|-----------------------|
| Site: WZ-AC2                                      | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                              | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                     | Polarity: Horizontal  |
| EUT: ACCESS POINT                                 | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT160 at 5570MHz |                       |

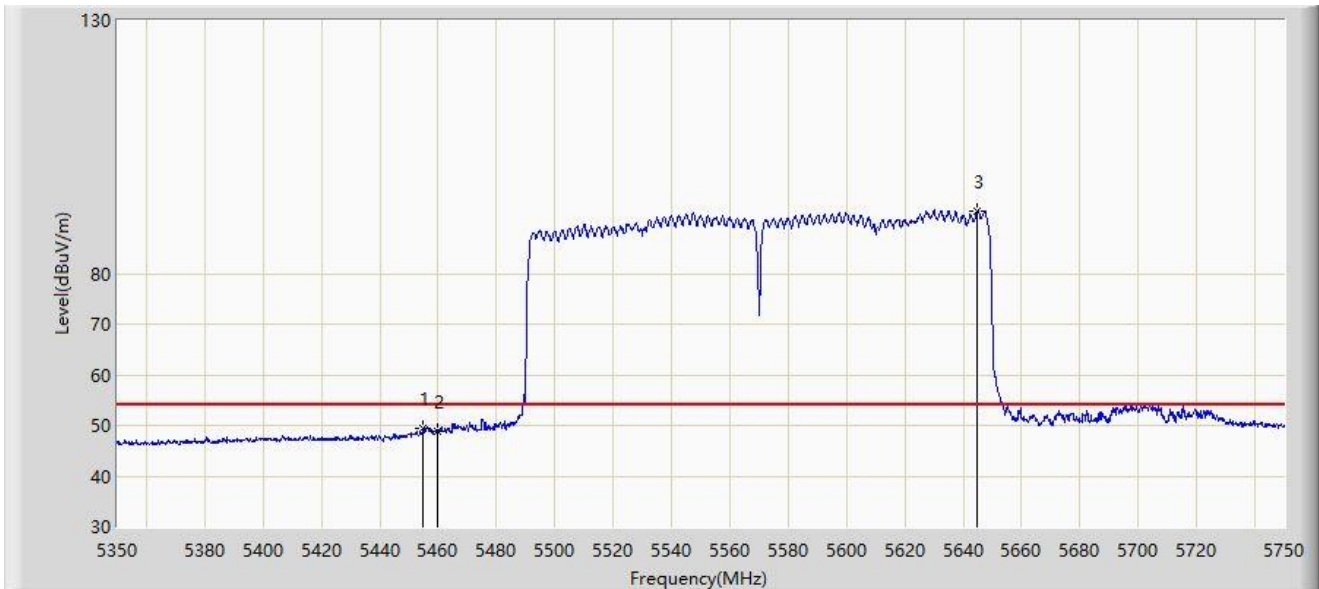


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5455.000        | 49.459                 | 46.399               | -4.541      | 54.000         | 3.060         | AV   |
| 2  |      | 5460.000        | 48.975                 | 45.826               | -5.025      | 54.000         | 3.149         | AV   |
| 3  |      | 5644.600        | 92.268                 | 88.119               | N/A         | N/A            | 4.149         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                   |                       |
|---------------------------------------------------|-----------------------|
| Site: WZ-AC2                                      | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                              | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                     | Polarity: Vertical    |
| EUT: ACCESS POINT                                 | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT160 at 5570MHz |                       |

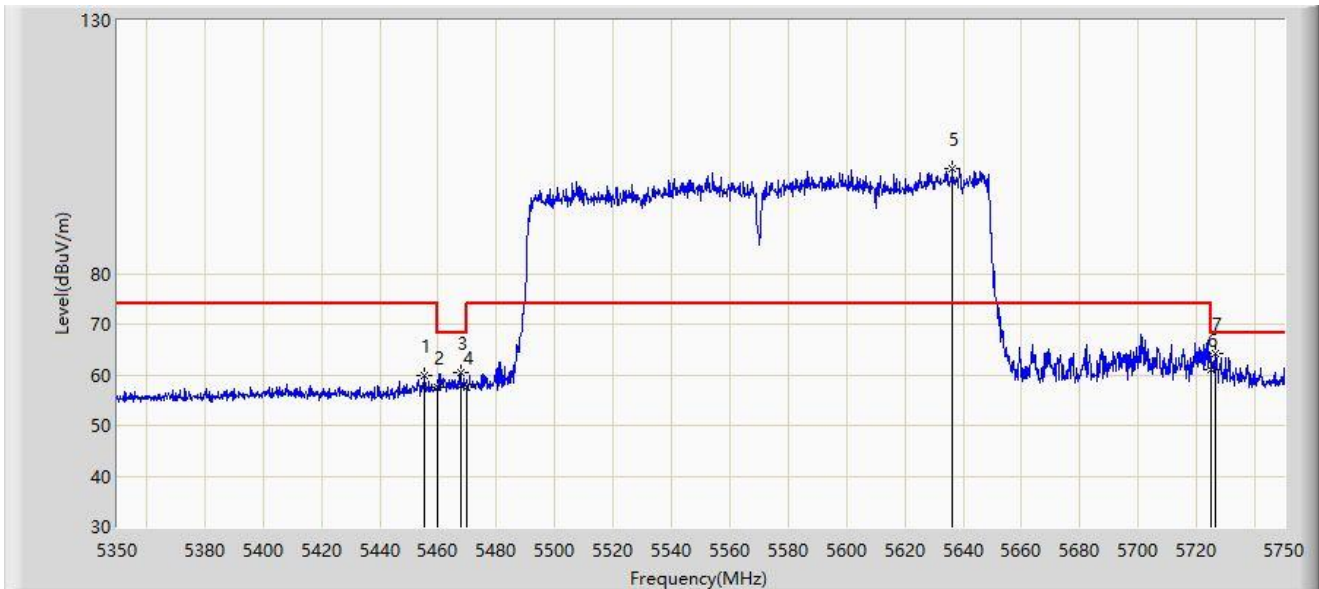


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5455.400        | 59.870                 | 56.804               | -14.130     | 74.000         | 3.066         | PK   |
| 2  |      | 5460.000        | 57.466                 | 54.317               | -16.534     | 74.000         | 3.149         | PK   |
| 3  |      | 5467.600        | 60.548                 | 57.252               | -7.652      | 68.200         | 3.295         | PK   |
| 4  |      | 5470.000        | 57.639                 | 54.297               | -10.561     | 68.200         | 3.341         | PK   |
| 5  |      | 5636.200        | 100.672                | 96.568               | N/A         | N/A            | 4.103         | PK   |
| 6  |      | 5725.000        | 60.968                 | 56.265               | -7.232      | 68.200         | 4.703         | PK   |
| 7  | *    | 5726.400        | 64.279                 | 59.572               | -3.921      | 68.200         | 4.707         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                   |                       |
|---------------------------------------------------|-----------------------|
| Site: WZ-AC2                                      | Test Date: 2023-11-20 |
| Limit: FCC_5G_RE(3m)                              | Engineer: Karl Gao    |
| Probe: BBHA9120D_1457_1-18GHz                     | Polarity: Vertical    |
| EUT: ACCESS POINT                                 | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT160 at 5570MHz |                       |

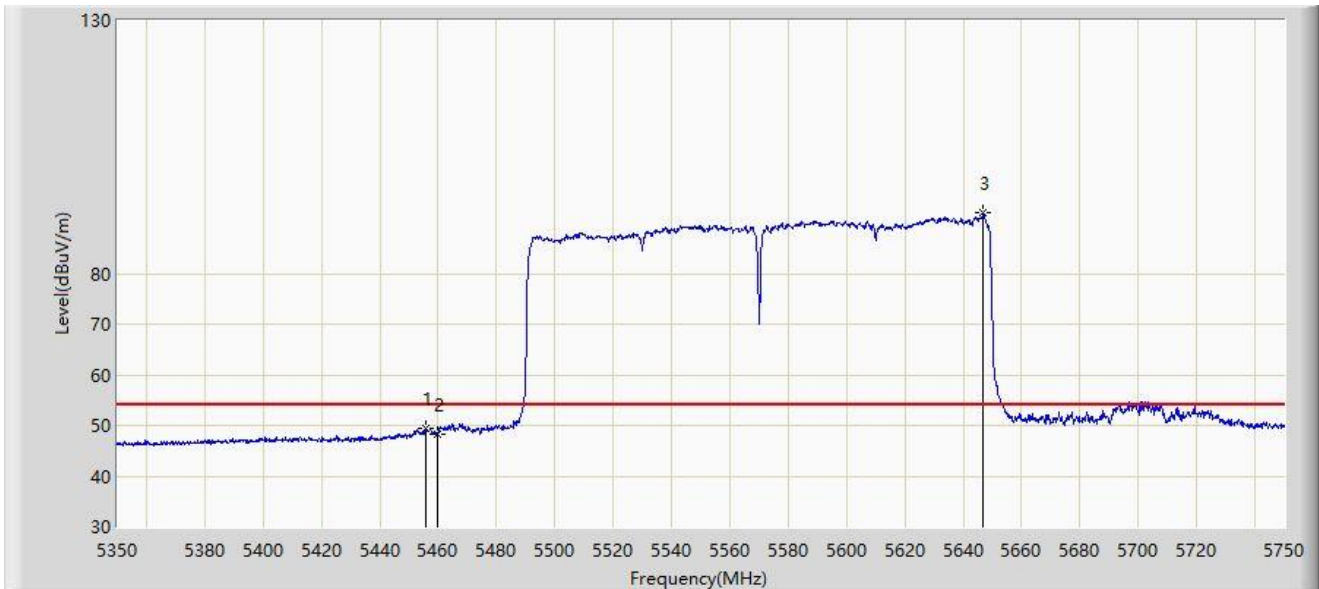

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5456.000        | 49.439                 | 46.364               | -4.561      | 54.000         | 3.075         | AV   |
| 2  |      | 5460.000        | 48.259                 | 45.110               | -5.741      | 54.000         | 3.149         | AV   |
| 3  |      | 5646.800        | 91.975                 | 87.837               | N/A         | N/A            | 4.139         | AV   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

**Puncturing Mode:**

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Horizontal  |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5210MHz 4_242 |                       |

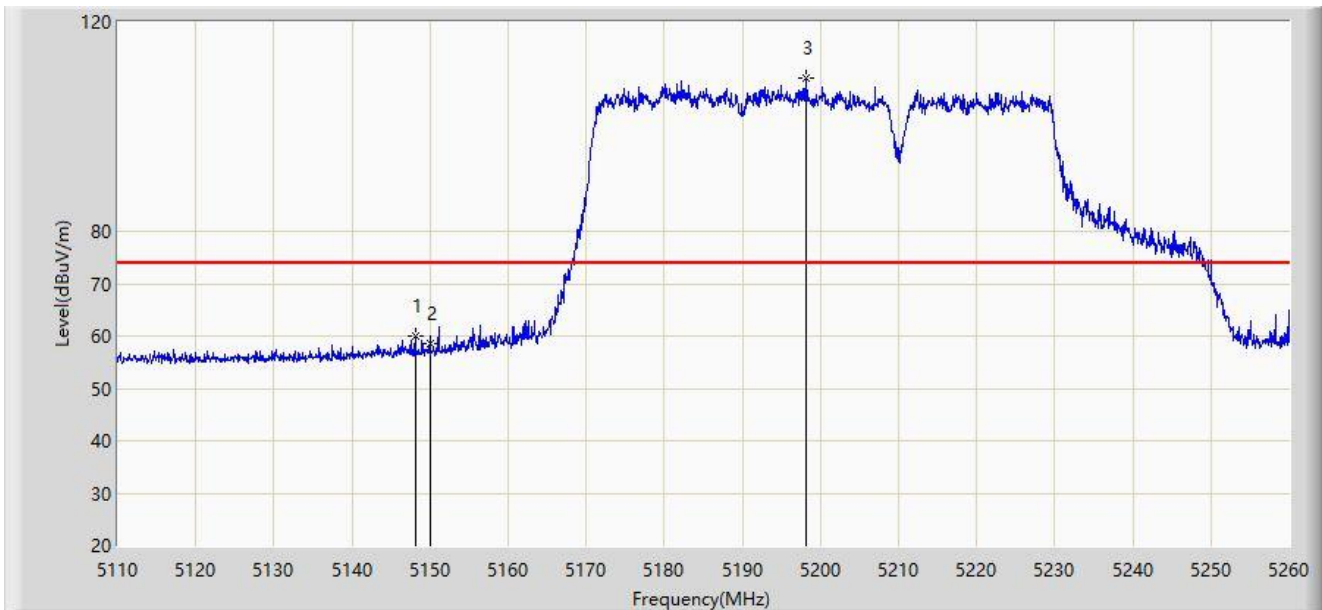


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5148.175        | 59.955                 | 56.182               | -14.045     | 74.000         | 3.773         | PK   |
| 2  |      | 5150.000        | 58.640                 | 54.860               | -15.360     | 74.000         | 3.780         | PK   |
| 3  |      | 5198.125        | 109.188                | 105.879              | N/A         | N/A            | 3.309         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Horizontal  |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5210MHz 4_242 |                       |

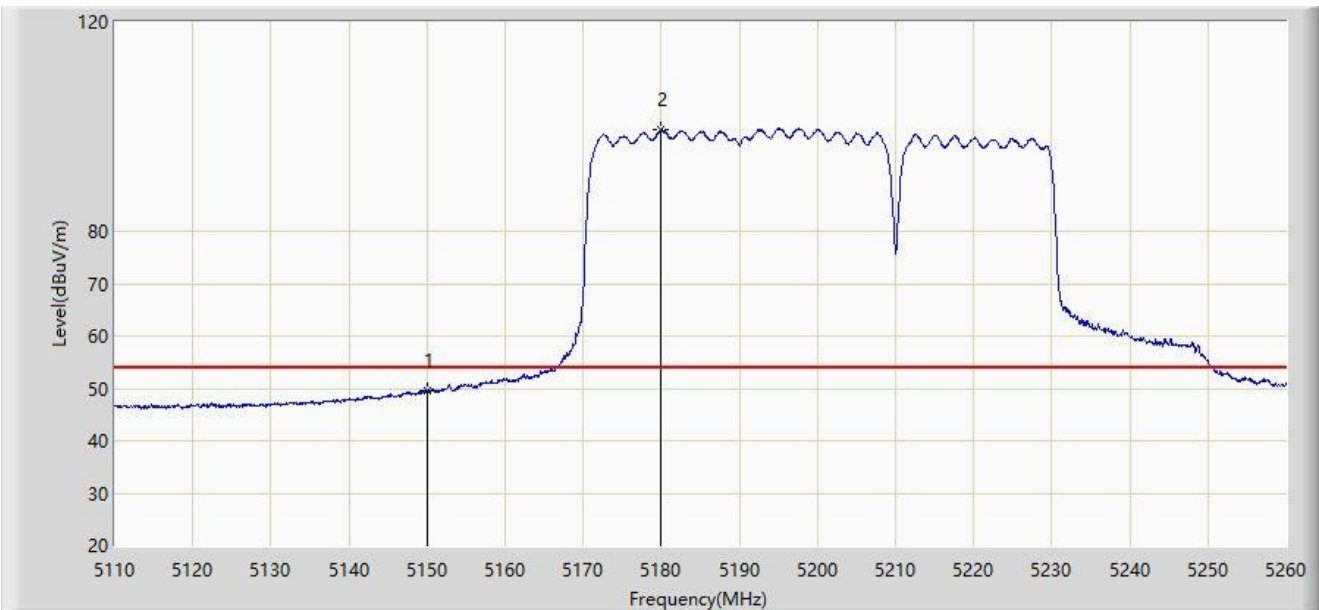


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5150.000        | 49.525                 | 45.745               | -4.475      | 54.000         | 3.780         | AV   |
| 2  |      | 5179.975        | 99.350                 | 95.685               | N/A         | N/A            | 3.665         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Vertical    |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5210MHz 4_242 |                       |

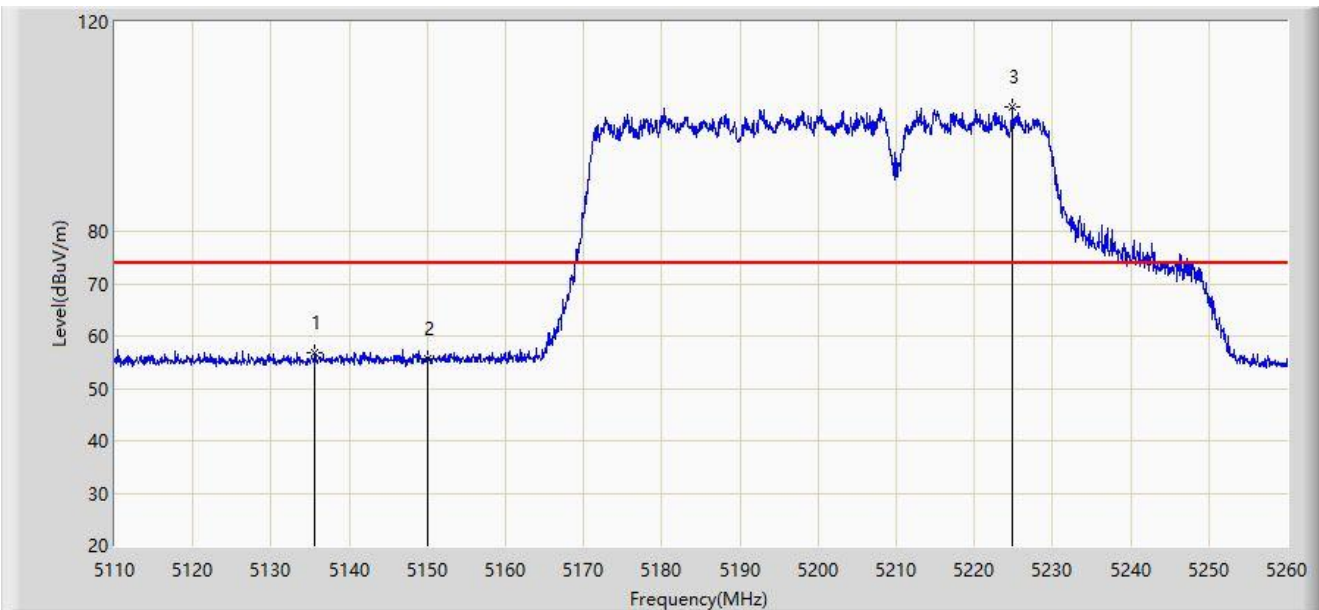


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5135.650        | 56.897                 | 53.286               | -17.103     | 74.000         | 3.611         | PK   |
| 2  |      | 5150.000        | 55.689                 | 51.909               | -18.311     | 74.000         | 3.780         | PK   |
| 3  |      | 5224.900        | 103.797                | 100.349              | N/A         | N/A            | 3.448         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Vertical    |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5210MHz 4_242 |                       |

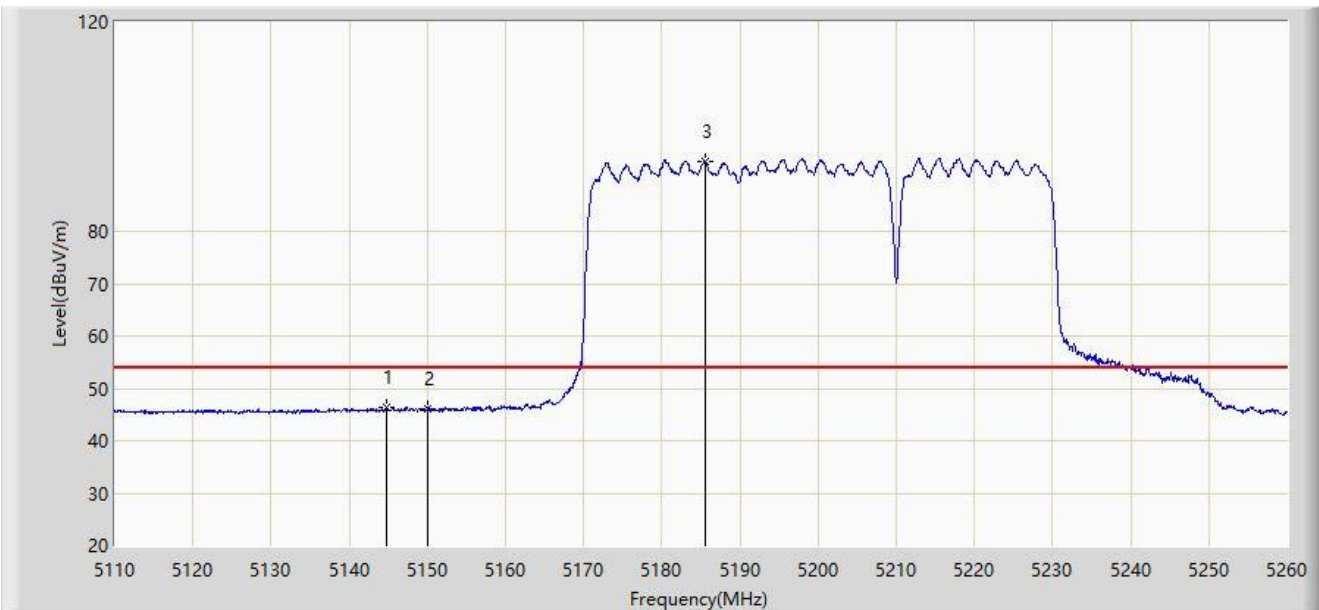


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5144.725        | 46.251                 | 42.521               | -7.749      | 54.000         | 3.730         | AV   |
| 2  |      | 5150.000        | 45.976                 | 42.196               | -8.024      | 54.000         | 3.780         | AV   |
| 3  |      | 5185.525        | 93.302                 | 89.733               | N/A         | N/A            | 3.569         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Horizontal  |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5290MHz 1_242 |                       |

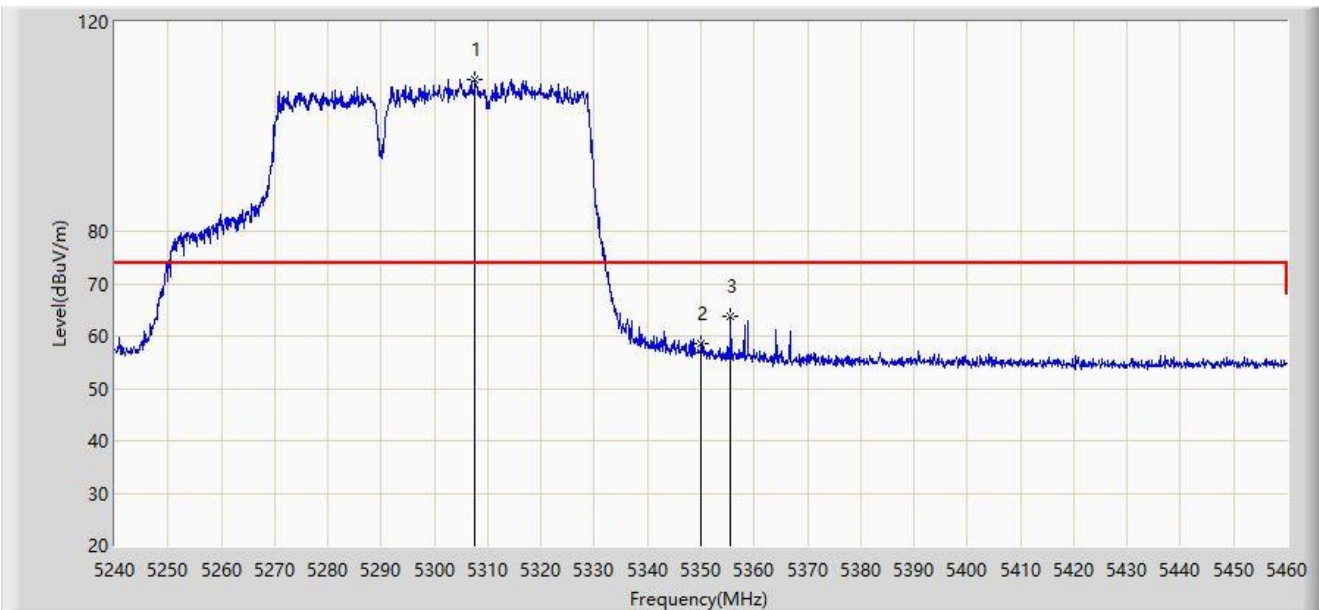


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5307.650        | 109.092                | 105.621              | N/A         | N/A            | 3.470         | PK   |
| 2  |      | 5350.000        | 58.579                 | 55.256               | -15.421     | 74.000         | 3.323         | PK   |
| 3  | *    | 5355.610        | 63.878                 | 60.622               | -10.122     | 74.000         | 3.255         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Horizontal  |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5290MHz 1_242 |                       |

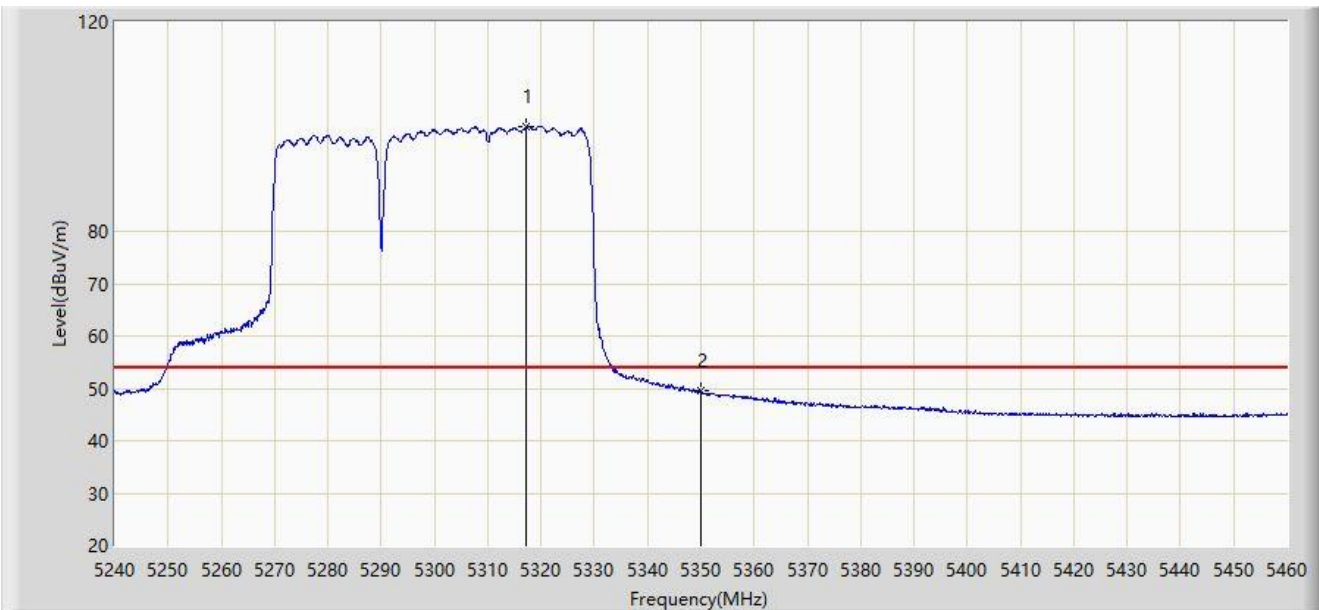


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5317.330        | 100.065                | 96.383               | N/A         | N/A            | 3.682         | AV   |
| 2  | *    | 5350.000        | 49.510                 | 46.187               | -4.490      | 54.000         | 3.323         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Vertical    |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5290MHz 1_242 |                       |

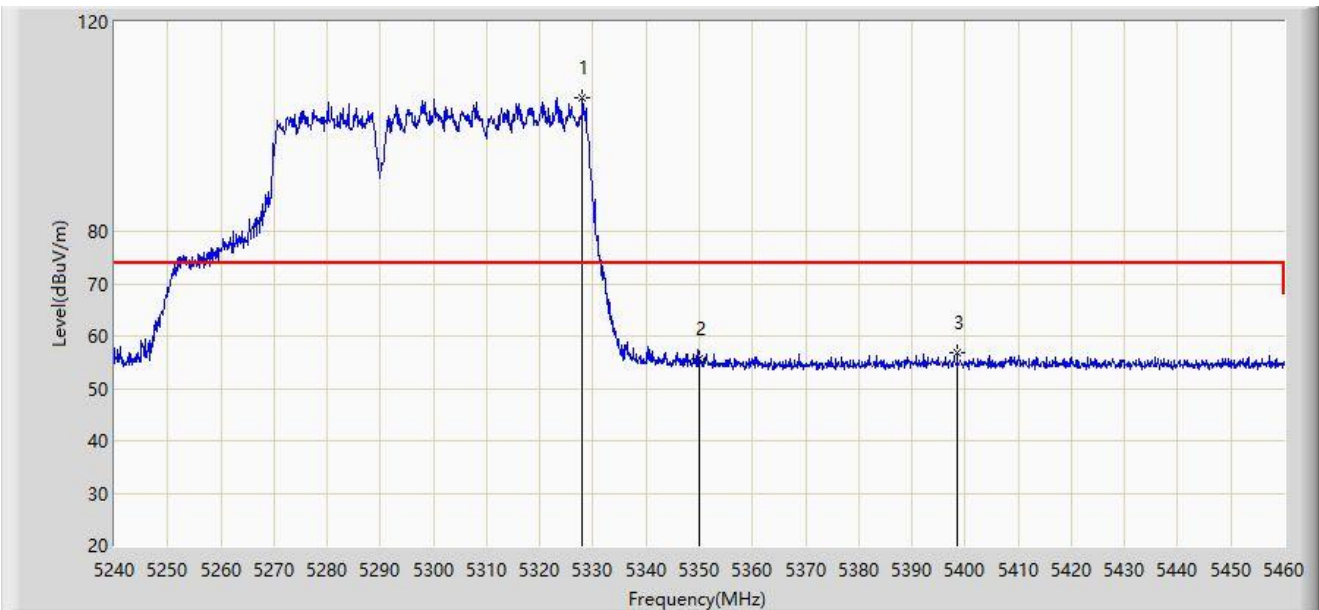


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5328.000        | 105.578                | 101.822              | N/A         | N/A            | 3.756         | PK   |
| 2  |      | 5350.000        | 55.621                 | 52.298               | -18.379     | 74.000         | 3.323         | PK   |
| 3  | *    | 5398.510        | 56.881                 | 53.066               | -17.119     | 74.000         | 3.816         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Vertical    |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5290MHz 1_242 |                       |

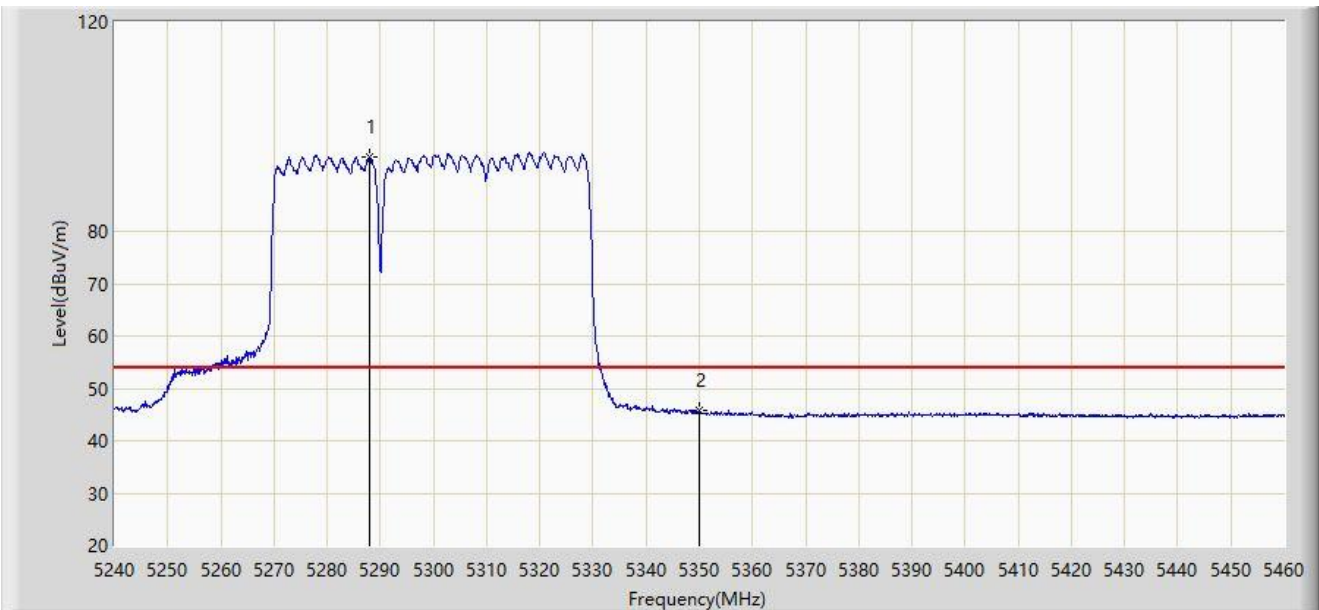


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5287.960        | 94.074                 | 90.949               | N/A         | N/A            | 3.125         | AV   |
| 2  | *    | 5350.000        | 45.669                 | 42.346               | -8.331      | 54.000         | 3.323         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Horizontal  |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5530MHz 4_242 |                       |

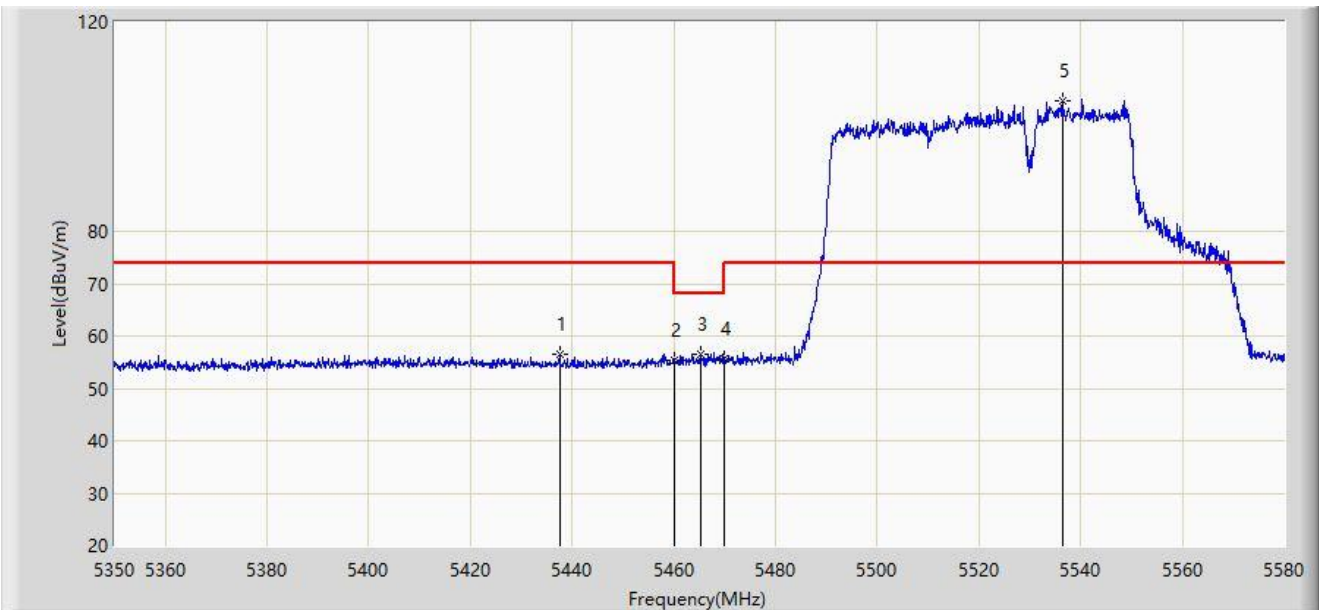


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5437.515        | 56.420                 | 52.876               | -17.580     | 74.000         | 3.544         | PK   |
| 2  |      | 5460.000        | 55.288                 | 51.678               | -18.712     | 74.000         | 3.610         | PK   |
| 3  | *    | 5465.230        | 56.577                 | 52.869               | -11.623     | 68.200         | 3.708         | PK   |
| 4  |      | 5470.000        | 55.548                 | 51.750               | -12.652     | 68.200         | 3.797         | PK   |
| 5  |      | 5536.415        | 104.942                | 101.247              | N/A         | N/A            | 3.695         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Horizontal  |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5530MHz 4_242 |                       |

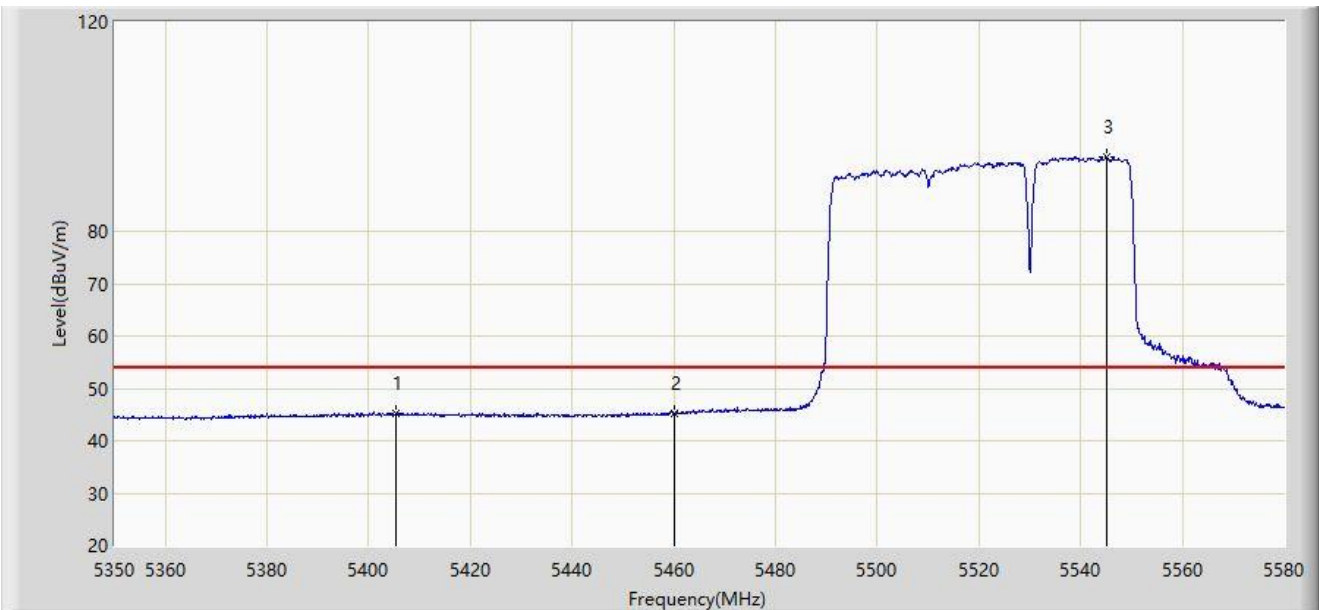


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5405.200        | 45.335                 | 41.468               | -8.665      | 54.000         | 3.867         | AV   |
| 2  |      | 5460.000        | 45.329                 | 41.719               | -8.671      | 54.000         | 3.610         | AV   |
| 3  |      | 5545.155        | 94.118                 | 90.247               | N/A         | N/A            | 3.871         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Vertical    |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5530MHz 4_242 |                       |

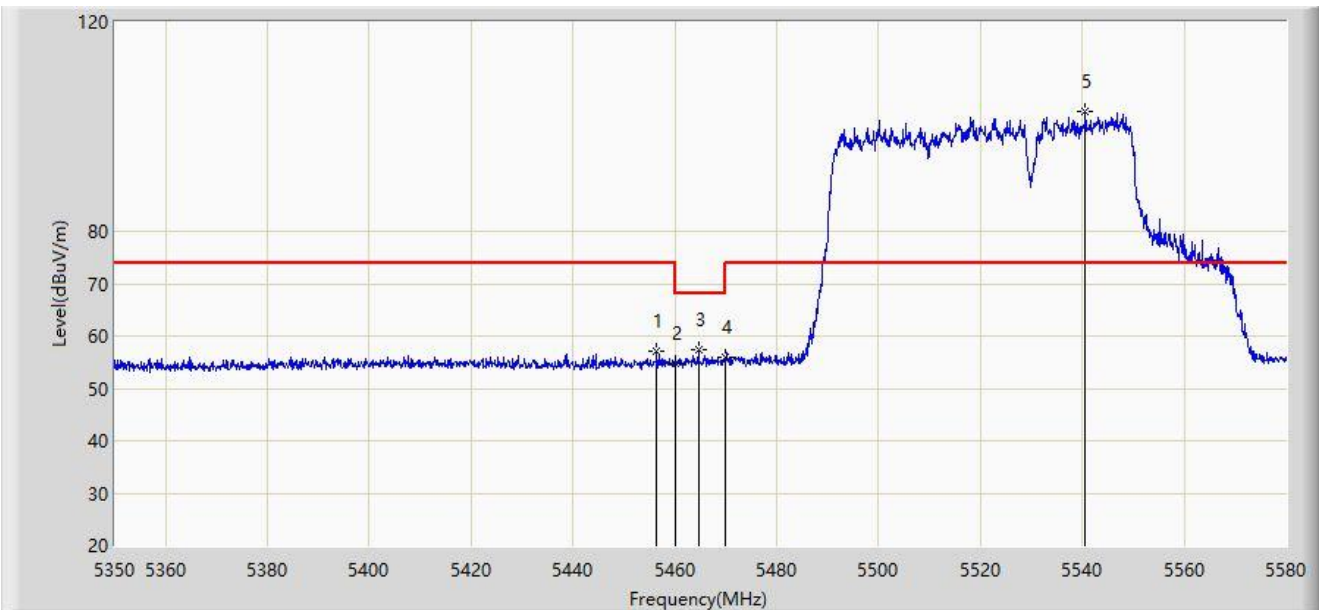


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5456.490        | 57.001                 | 53.457               | -16.999     | 74.000         | 3.543         | PK   |
| 2  |      | 5460.000        | 54.706                 | 51.096               | -19.294     | 74.000         | 3.610         | PK   |
| 3  | *    | 5464.655        | 57.378                 | 53.680               | -10.822     | 68.200         | 3.698         | PK   |
| 4  |      | 5470.000        | 55.891                 | 52.093               | -12.309     | 68.200         | 3.797         | PK   |
| 5  |      | 5540.555        | 102.919                | 99.137               | N/A         | N/A            | 3.782         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Vertical    |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5530MHz 4_242 |                       |

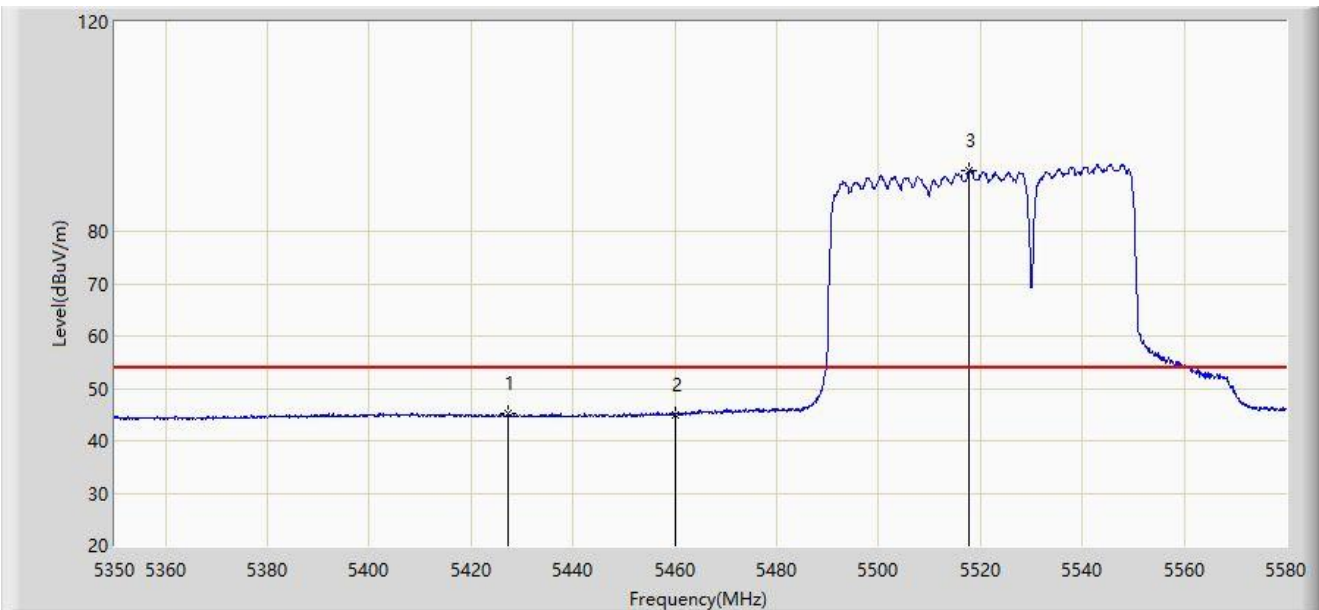


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 5427.280        | 45.187                 | 41.524               | -8.813      | 54.000         | 3.663         | AV   |
| 2  |      | 5460.000        | 45.066                 | 41.456               | -8.934      | 54.000         | 3.610         | AV   |
| 3  |      | 5517.670        | 91.601                 | 88.177               | N/A         | N/A            | 3.424         | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Horizontal  |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5610MHz 1_242 |                       |

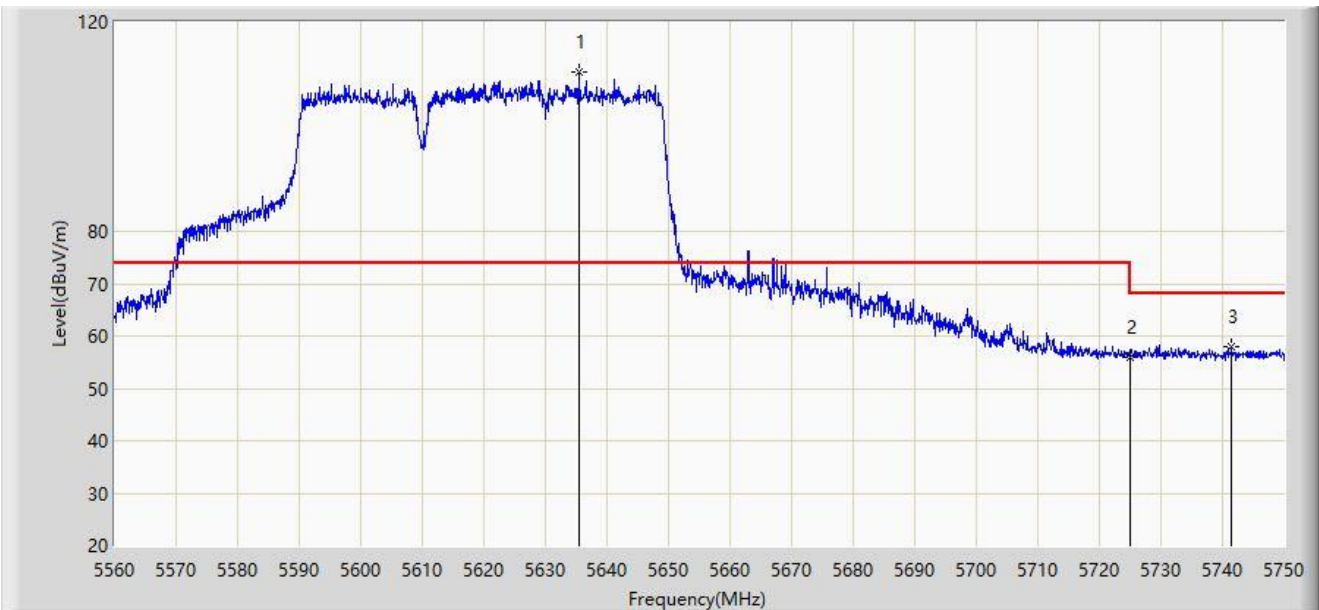


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5635.430        | 110.382                | 105.852              | N/A         | N/A            | 4.530         | PK   |
| 2  |      | 5725.000        | 55.973                 | 50.839               | -12.227     | 68.200         | 5.134         | PK   |
| 3  | *    | 5741.545        | 58.043                 | 53.070               | -10.157     | 68.200         | 4.973         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5G_RE(3m)                                   | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Vertical    |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5610MHz 1_242 |                       |

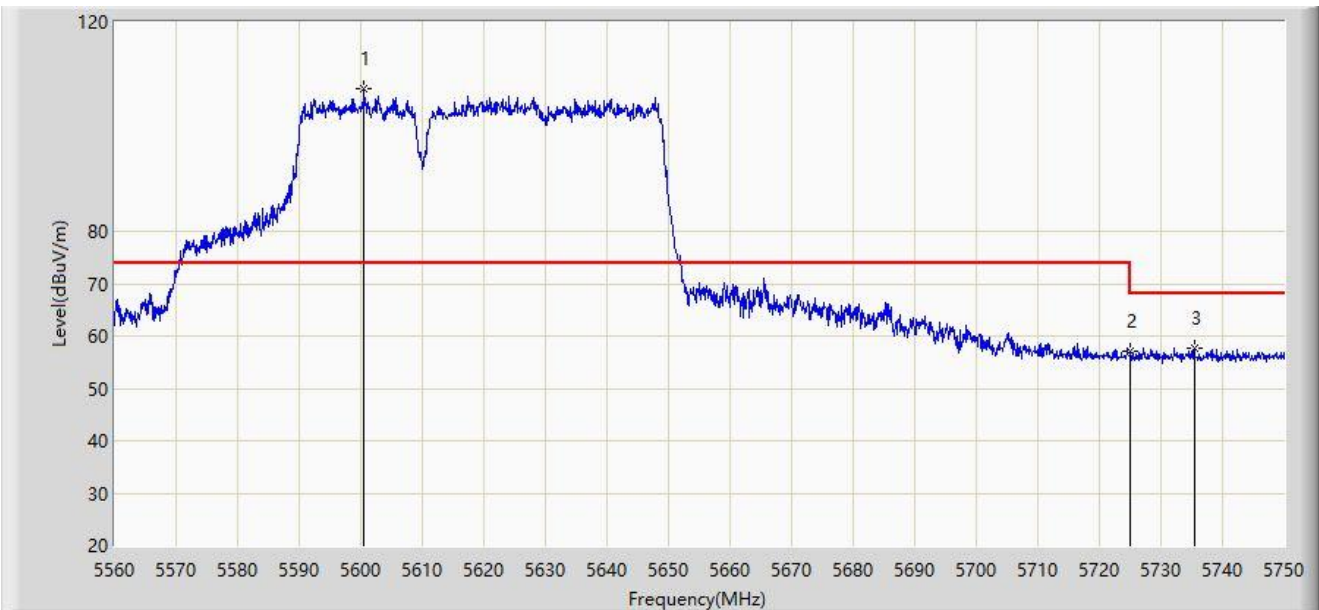


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5600.565        | 107.252                | 103.300              | N/A         | N/A            | 3.951         | PK   |
| 2  |      | 5725.000        | 56.967                 | 51.833               | -11.233     | 68.200         | 5.134         | PK   |
| 3  | *    | 5735.370        | 57.584                 | 52.543               | -10.616     | 68.200         | 5.042         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5.8G_RE(3m)                                 | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Horizontal  |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5775MHz 4_242 |                       |

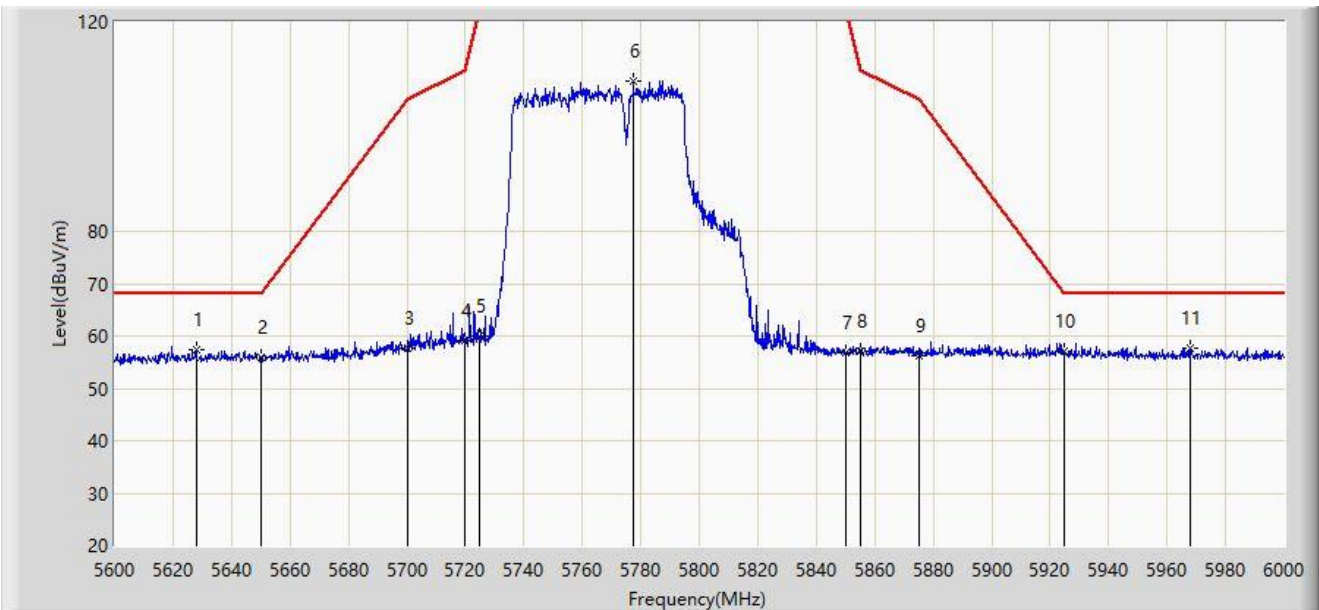


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5628.000        | 57.465                 | 53.005               | -10.735     | 68.200         | 4.460         | PK   |
| 2  |      | 5650.000        | 56.030                 | 51.527               | -12.170     | 68.200         | 4.502         | PK   |
| 3  |      | 5700.000        | 57.790                 | 52.927               | -47.410     | 105.200        | 4.863         | PK   |
| 4  |      | 5720.000        | 59.240                 | 54.147               | -51.560     | 110.800        | 5.093         | PK   |
| 5  |      | 5725.000        | 59.958                 | 54.824               | -62.242     | 122.200        | 5.134         | PK   |
| 6  |      | 5777.400        | 108.696                | 103.440              | N/A         | N/A            | 5.256         | PK   |
| 7  |      | 5850.000        | 56.945                 | 51.533               | -65.255     | 122.200        | 5.412         | PK   |
| 8  |      | 5855.000        | 57.049                 | 51.589               | -53.751     | 110.800        | 5.460         | PK   |
| 9  |      | 5875.000        | 56.190                 | 50.681               | -49.010     | 105.200        | 5.509         | PK   |
| 10 |      | 5925.000        | 57.151                 | 51.642               | -11.049     | 68.200         | 5.509         | PK   |
| 11 | *    | 5967.800        | 57.760                 | 52.170               | -10.440     | 68.200         | 5.590         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Site: WZ-AC2                                           | Test Date: 2024-04-10 |
| Limit: FCC_5.8G_RE(3m)                                 | Engineer: Dick Shen   |
| Probe: BBHA9120D_1457_1-18GHz                          | Polarity: Vertical    |
| EUT: ACCESS POINT                                      | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11be-EHT80 at 5775MHz 4_242 |                       |

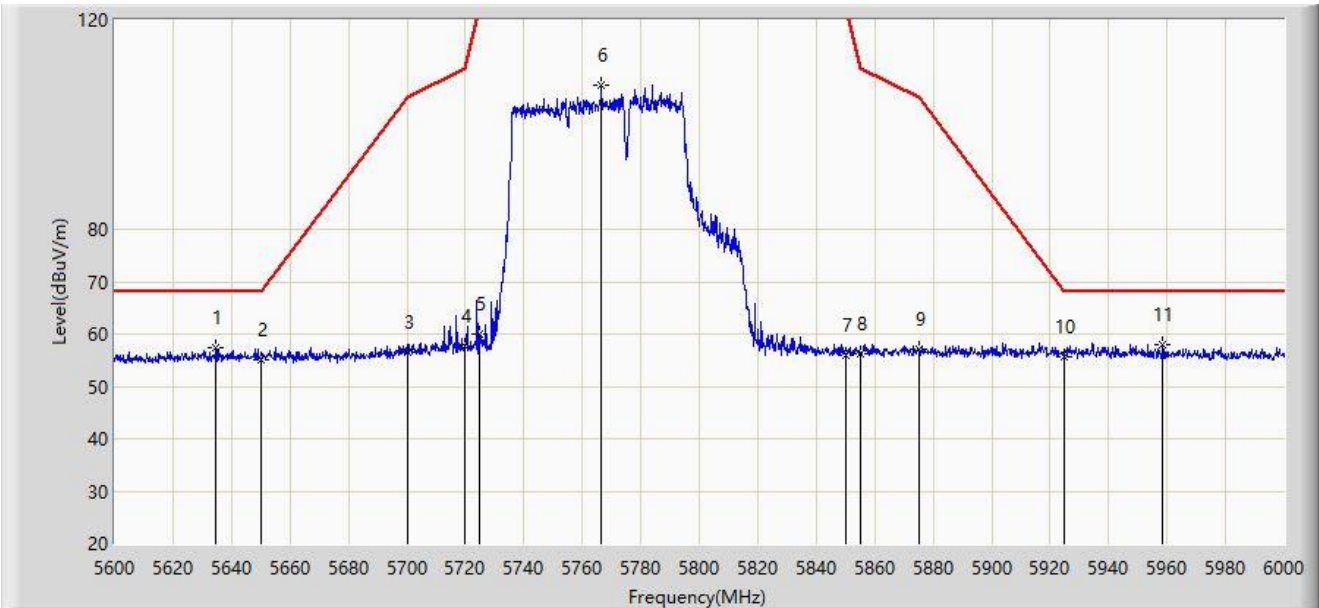

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 5634.800        | 57.286                 | 52.762               | -10.914     | 68.200         | 4.524         | PK   |
| 2  |      | 5650.000        | 55.138                 | 50.635               | -13.062     | 68.200         | 4.502         | PK   |
| 3  |      | 5700.000        | 56.535                 | 51.672               | -48.665     | 105.200        | 4.863         | PK   |
| 4  |      | 5720.000        | 57.781                 | 52.688               | -53.019     | 110.800        | 5.093         | PK   |
| 5  |      | 5725.000        | 59.887                 | 54.753               | -62.313     | 122.200        | 5.134         | PK   |
| 6  |      | 5766.400        | 107.661                | 102.542              | N/A         | N/A            | 5.119         | PK   |
| 7  |      | 5850.000        | 55.971                 | 50.559               | -66.229     | 122.200        | 5.412         | PK   |
| 8  |      | 5855.000        | 56.129                 | 50.669               | -54.671     | 110.800        | 5.460         | PK   |
| 9  |      | 5875.000        | 57.198                 | 51.689               | -48.002     | 105.200        | 5.509         | PK   |
| 10 |      | 5925.000        | 55.716                 | 50.207               | -12.484     | 68.200         | 5.509         | PK   |
| 11 | *    | 5958.600        | 58.100                 | 52.516               | -10.100     | 68.200         | 5.584         | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).