


Site: WZ-AC2	Test Date: 2024-07-01
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: AP755	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530 MHz	

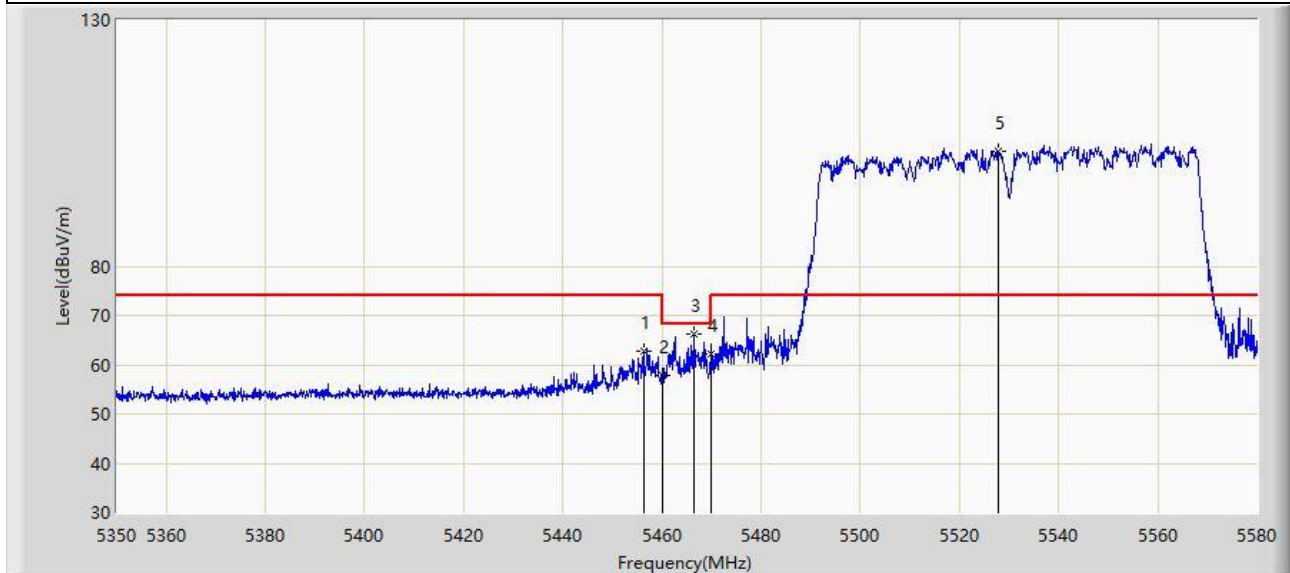


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.260	62.790	59.251	-11.210	74.000	3.539	PK
2		5460.000	57.914	54.304	-16.086	74.000	3.610	PK
3	*	5466.380	66.360	62.630	-1.840	68.200	3.730	PK
4		5470.000	62.186	58.388	-6.014	68.200	3.797	PK
5		5527.905	103.200	99.691	N/A	N/A	3.509	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-07-01
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: AP755	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530 MHz	

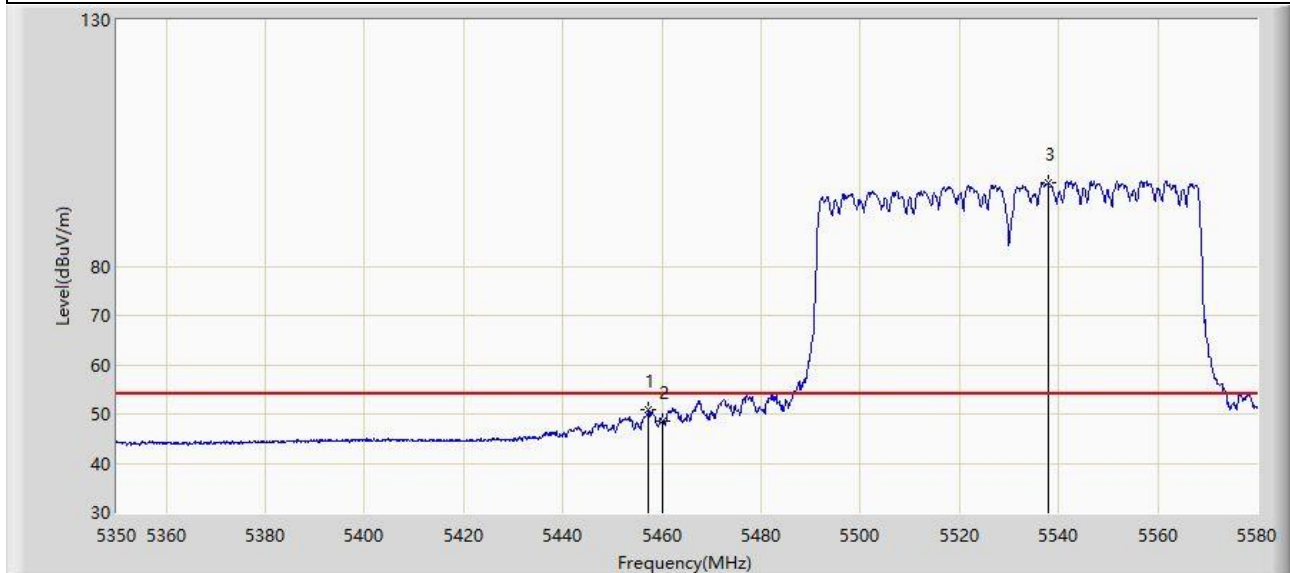


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5457.295	50.970	47.410	-3.030	54.000	3.559	AV
2		5460.000	48.564	44.954	-5.436	54.000	3.610	AV
3		5537.795	96.966	93.240	N/A	N/A	3.726	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-07-01
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: AP755	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530 MHz	

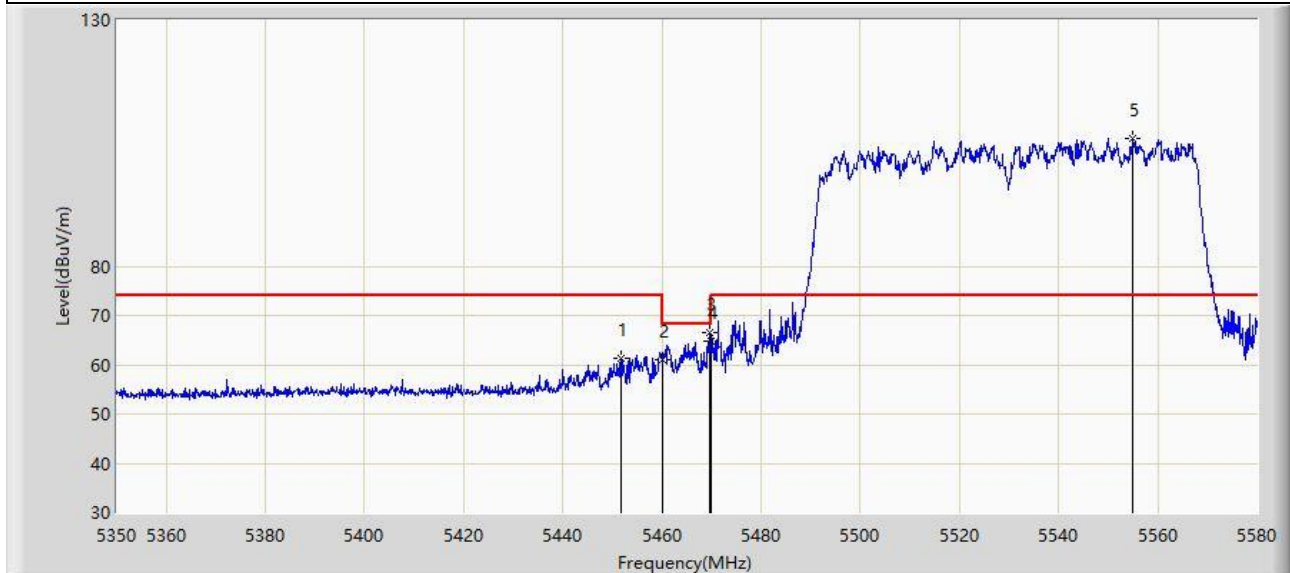


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5451.775	61.417	57.917	-12.583	74.000	3.500	PK
2		5460.000	61.133	57.523	-12.867	74.000	3.610	PK
3	*	5469.600	66.429	62.639	-1.771	68.200	3.790	PK
4		5470.000	64.910	61.112	-3.290	68.200	3.797	PK
5		5554.930	105.941	101.921	N/A	N/A	4.020	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-07-01
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: AP755	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530 MHz	

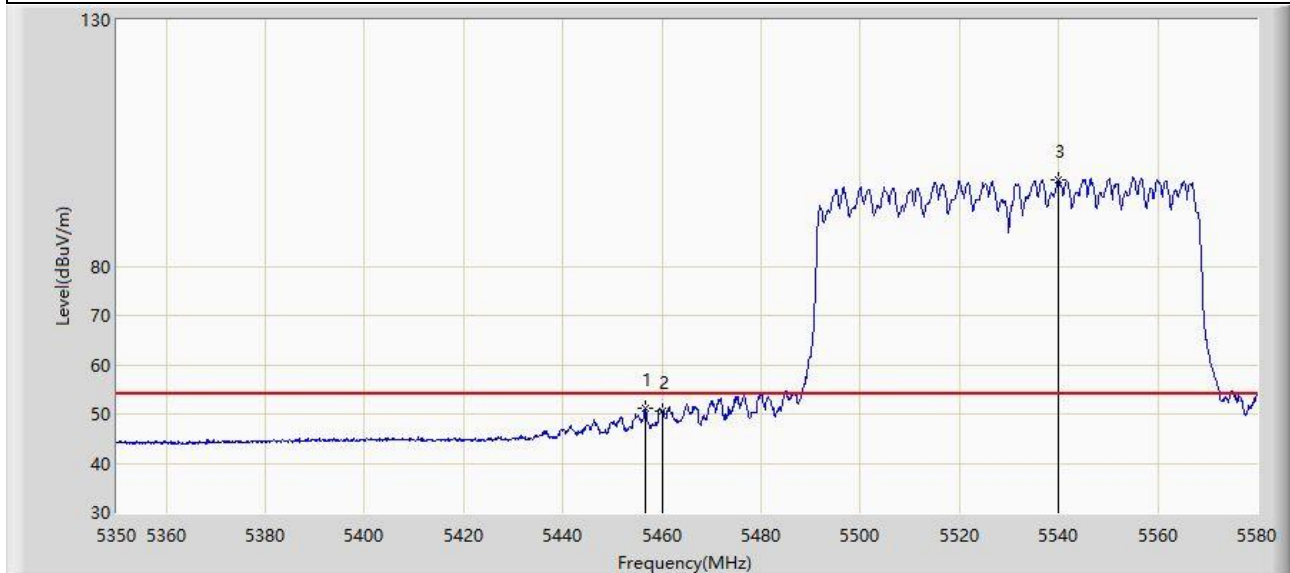


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.605	51.062	47.516	-2.938	54.000	3.546	AV
2		5460.000	50.601	46.991	-3.399	54.000	3.610	AV
3		5539.980	97.561	93.790	N/A	N/A	3.771	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-07-01
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: AP755	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610 MHz	

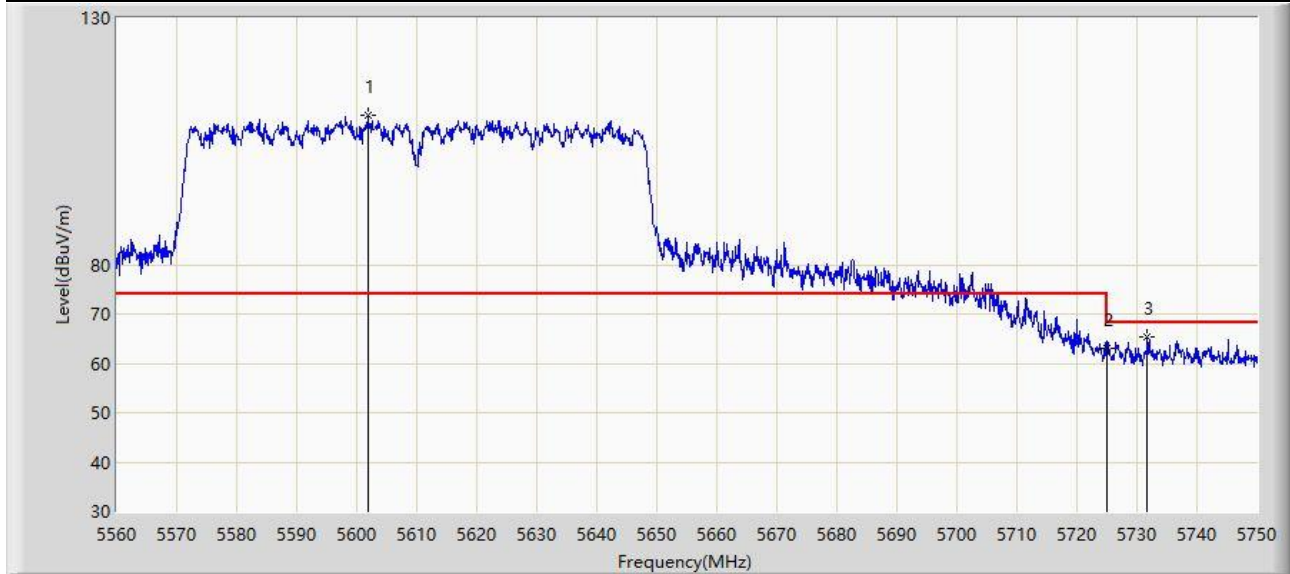


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5601.800	110.416	106.454	N/A	N/A	3.962	PK
2		5725.000	62.938	57.804	-5.262	68.200	5.134	PK
3	*	5731.760	65.218	60.138	-2.982	68.200	5.081	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-07-01
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: AP755	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610 MHz	

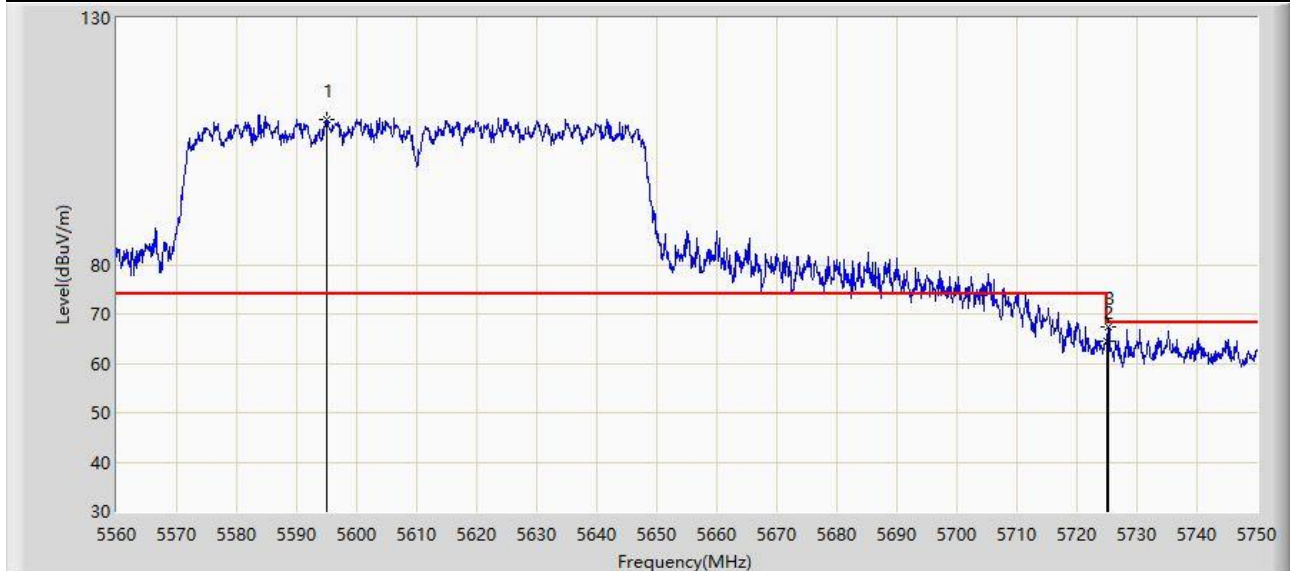


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5595.055	109.286	105.374	N/A	N/A	3.912	PK
2		5725.000	64.409	59.275	-3.791	68.200	5.134	PK
3	*	5725.205	67.265	62.129	-0.935	68.200	5.136	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775 MHz	

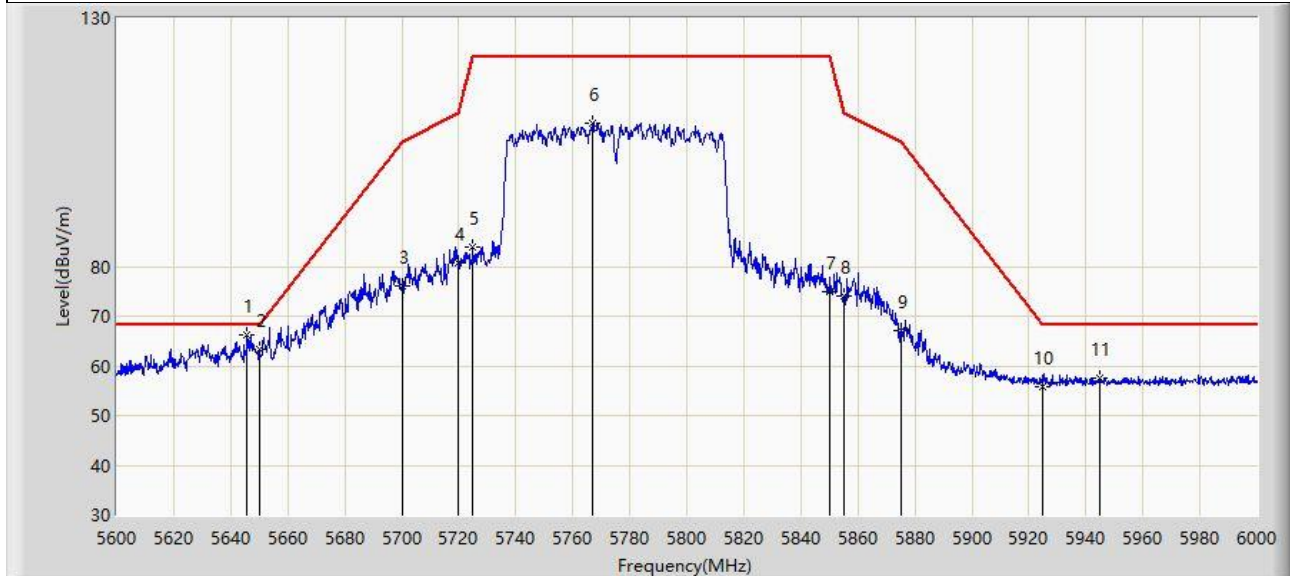


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5645.600	66.321	61.780	-1.879	68.200	4.541	PK
2		5650.000	63.263	58.760	-4.937	68.200	4.502	PK
3		5700.000	76.202	71.339	-28.998	105.200	4.863	PK
4		5720.000	80.586	75.493	-30.214	110.800	5.093	PK
5		5725.000	84.035	78.901	-38.165	122.200	5.134	PK
6		5767.000	108.729	103.602	N/A	N/A	5.127	PK
7		5850.000	75.021	69.609	-47.179	122.200	5.412	PK
8		5855.000	74.159	68.699	-36.641	110.800	5.460	PK
9		5875.000	67.124	61.615	-38.076	105.200	5.509	PK
10		5925.000	55.801	50.292	-12.399	68.200	5.509	PK
11		5944.800	57.501	51.916	-10.699	68.200	5.586	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775 MHz	

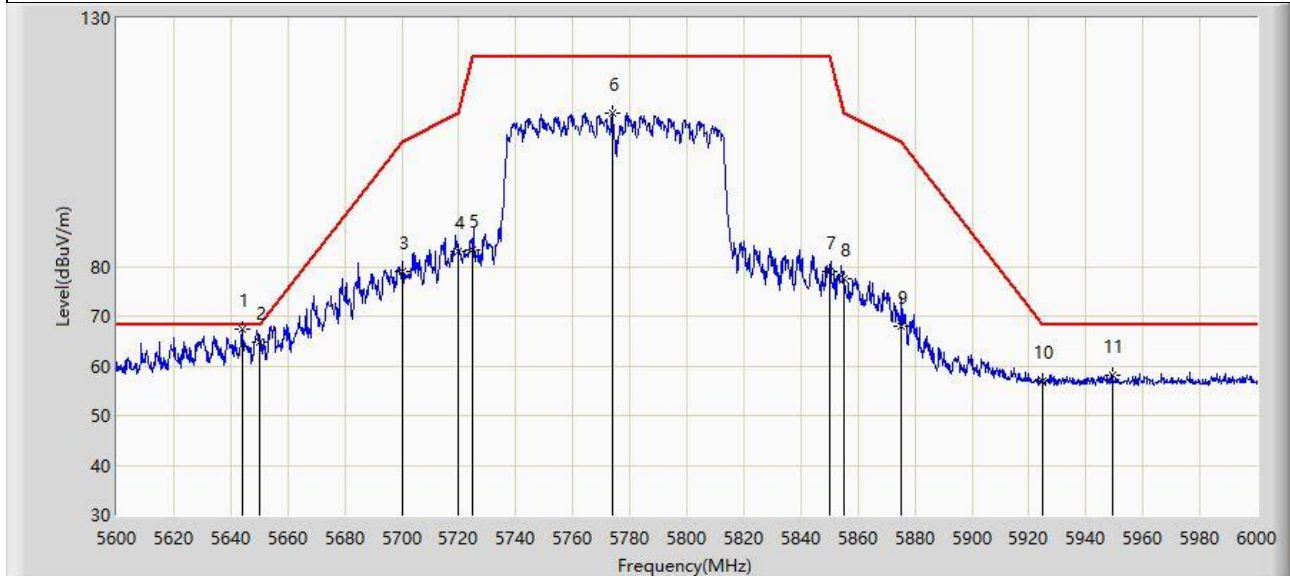


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5644.000	67.445	62.889	-0.755	68.200	4.556	PK
2		5650.000	64.848	60.345	-3.352	68.200	4.502	PK
3		5700.000	78.917	74.054	-26.283	105.200	4.863	PK
4		5720.000	83.050	77.957	-27.750	110.800	5.093	PK
5		5725.000	83.194	78.060	-39.006	122.200	5.134	PK
6		5773.800	110.988	105.775	N/A	N/A	5.214	PK
7		5850.000	78.876	73.464	-43.324	122.200	5.412	PK
8		5855.000	77.531	72.071	-33.269	110.800	5.460	PK
9		5875.000	68.114	62.605	-37.086	105.200	5.509	PK
10		5925.000	56.824	51.315	-11.376	68.200	5.509	PK
11		5949.400	58.118	52.523	-10.082	68.200	5.595	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250 MHz	

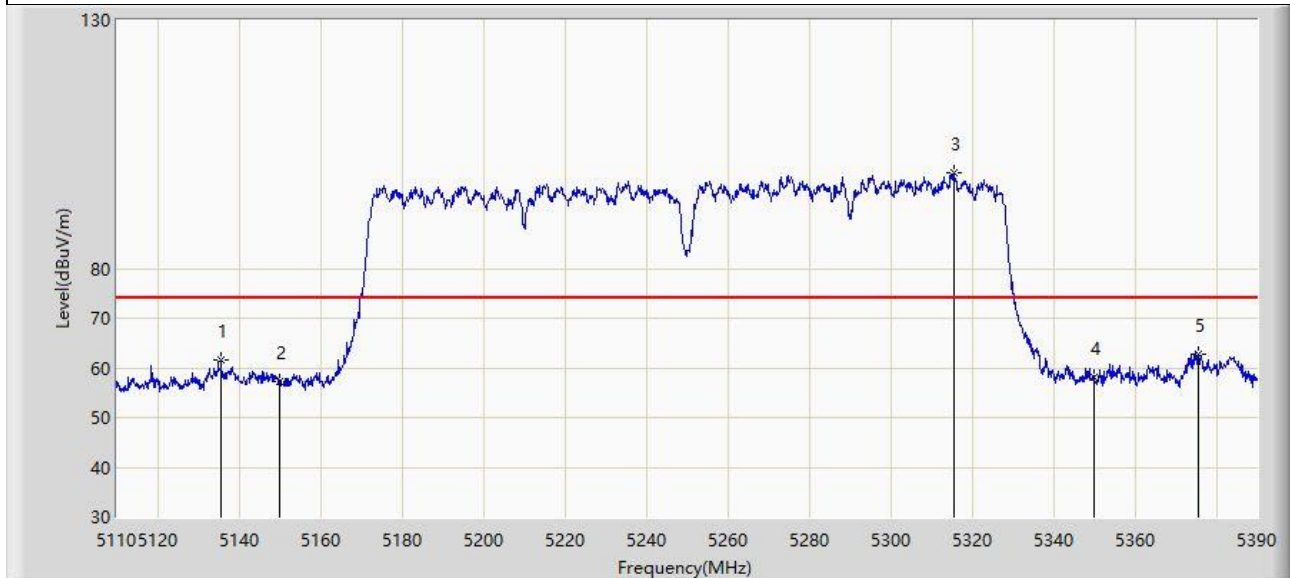


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5135.620	61.642	58.032	-12.358	74.000	3.611	PK
2		5150.000	57.146	53.366	-16.854	74.000	3.780	PK
3		5315.520	99.160	95.523	N/A	N/A	3.636	PK
4		5350.000	58.234	54.911	-15.766	74.000	3.323	PK
5	*	5375.440	62.822	59.448	-11.178	74.000	3.374	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250 MHz	

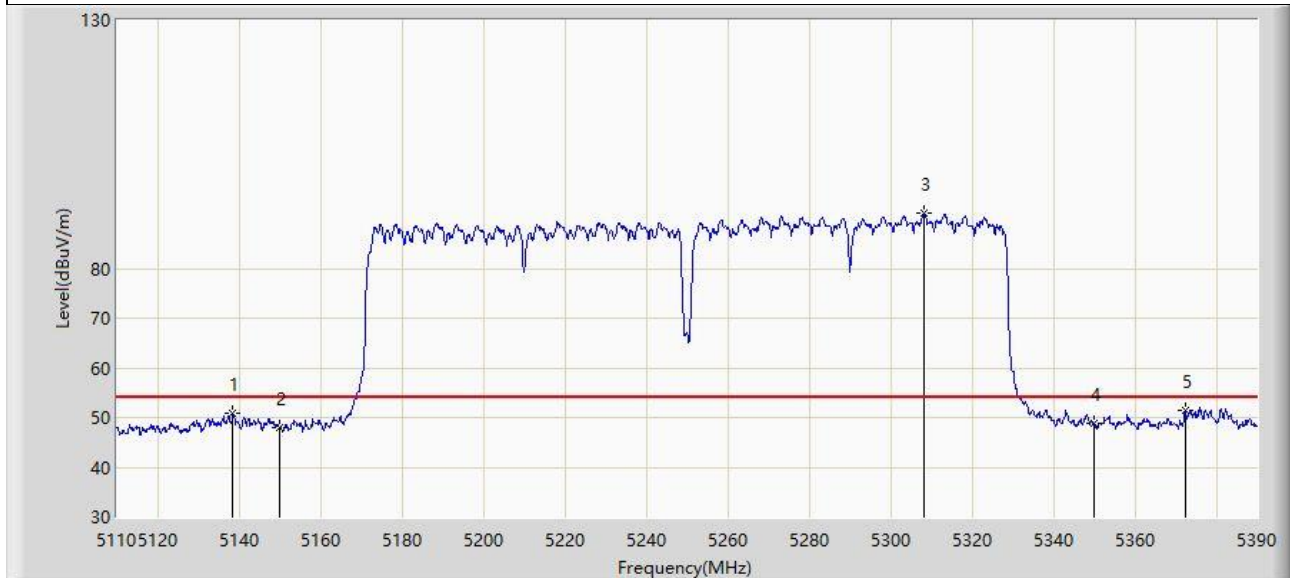


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5138.560	50.975	47.326	-3.025	54.000	3.650	AV
2		5150.000	48.059	44.279	-5.941	54.000	3.780	AV
3		5308.380	91.044	87.559	N/A	N/A	3.485	AV
4		5350.000	48.744	45.421	-5.256	54.000	3.323	AV
5	*	5372.360	51.483	48.182	-2.517	54.000	3.300	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250 MHz	

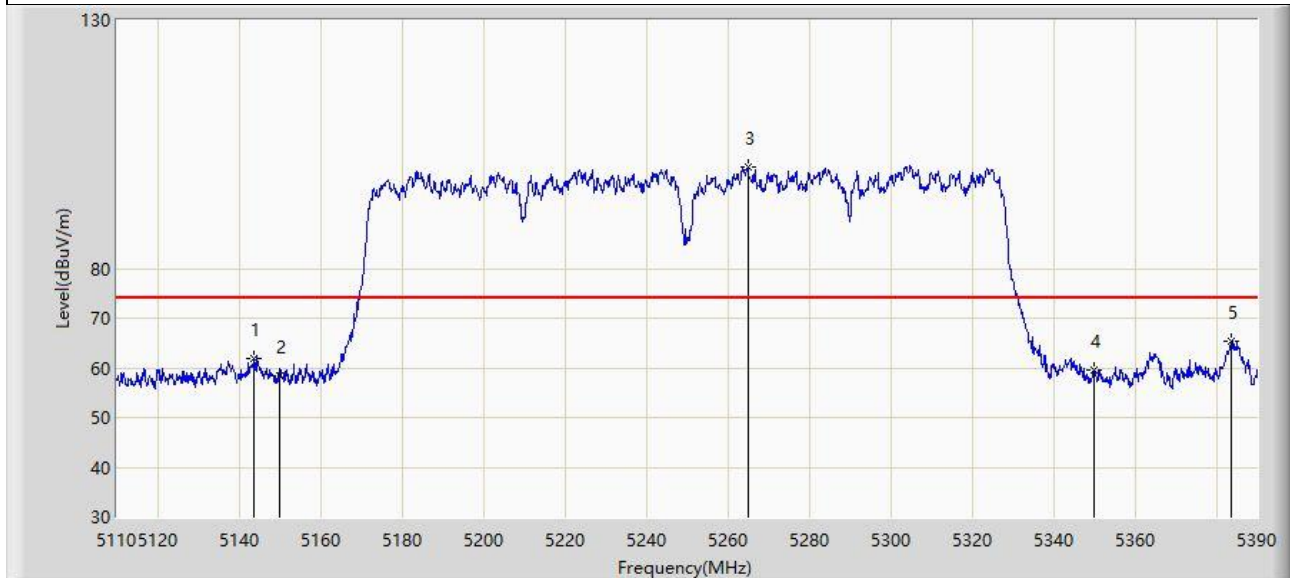


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5143.740	61.907	58.190	-12.093	74.000	3.717	PK
2		5150.000	58.380	54.600	-15.620	74.000	3.780	PK
3		5264.980	100.505	97.383	N/A	N/A	3.121	PK
4		5350.000	59.434	56.111	-14.566	74.000	3.323	PK
5	*	5383.840	65.372	61.797	-8.628	74.000	3.575	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250 MHz	

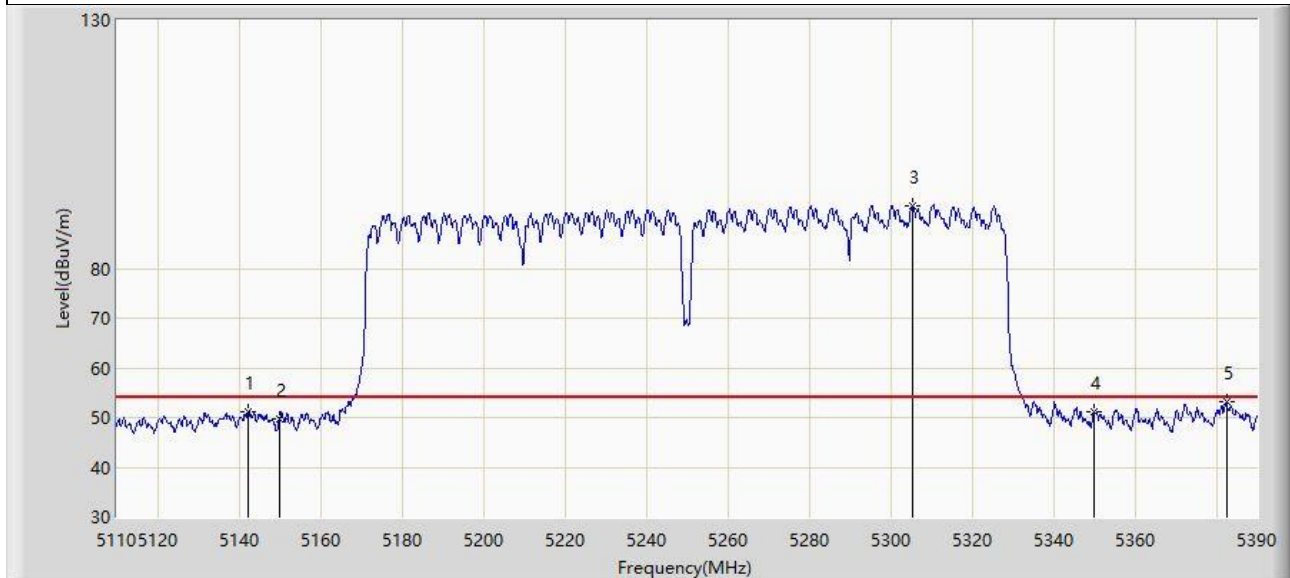


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5142.200	51.127	47.430	-2.873	54.000	3.696	AV
2		5150.000	49.828	46.048	-4.172	54.000	3.780	AV
3		5305.440	92.726	89.298	N/A	N/A	3.428	AV
4		5350.000	51.189	47.866	-2.811	54.000	3.323	AV
5	*	5382.580	53.134	49.589	-0.866	54.000	3.545	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_5G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570 MHz	

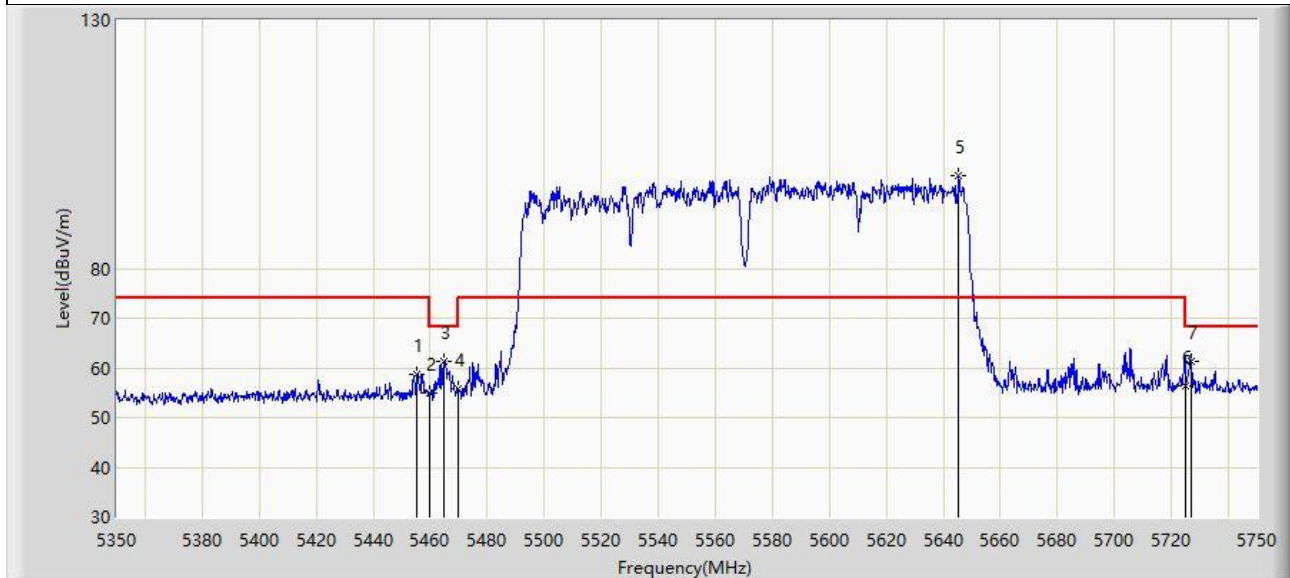


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5455.400	58.639	55.117	-15.361	74.000	3.521	PK
2		5460.000	54.932	51.322	-19.068	74.000	3.610	PK
3	*	5464.800	61.351	57.651	-6.849	68.200	3.701	PK
4		5470.000	55.837	52.039	-12.363	68.200	3.797	PK
5		5645.200	98.693	94.148	N/A	N/A	4.544	PK
6		5725.000	56.331	51.197	-11.869	68.200	5.134	PK
7		5726.800	61.321	56.186	-6.879	68.200	5.135	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_5G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570 MHz	

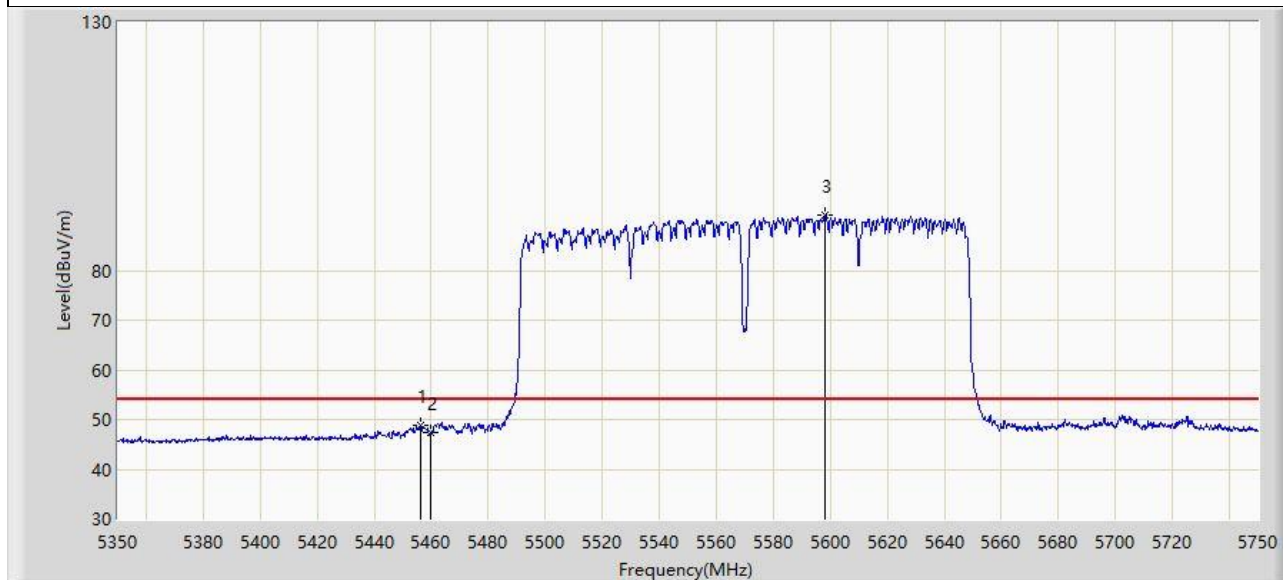


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.400	48.888	45.346	-5.112	54.000	3.542	AV
2		5460.000	47.284	43.674	-6.716	54.000	3.610	AV
3		5598.200	91.044	87.109	N/A	N/A	3.935	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_5G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570 MHz	

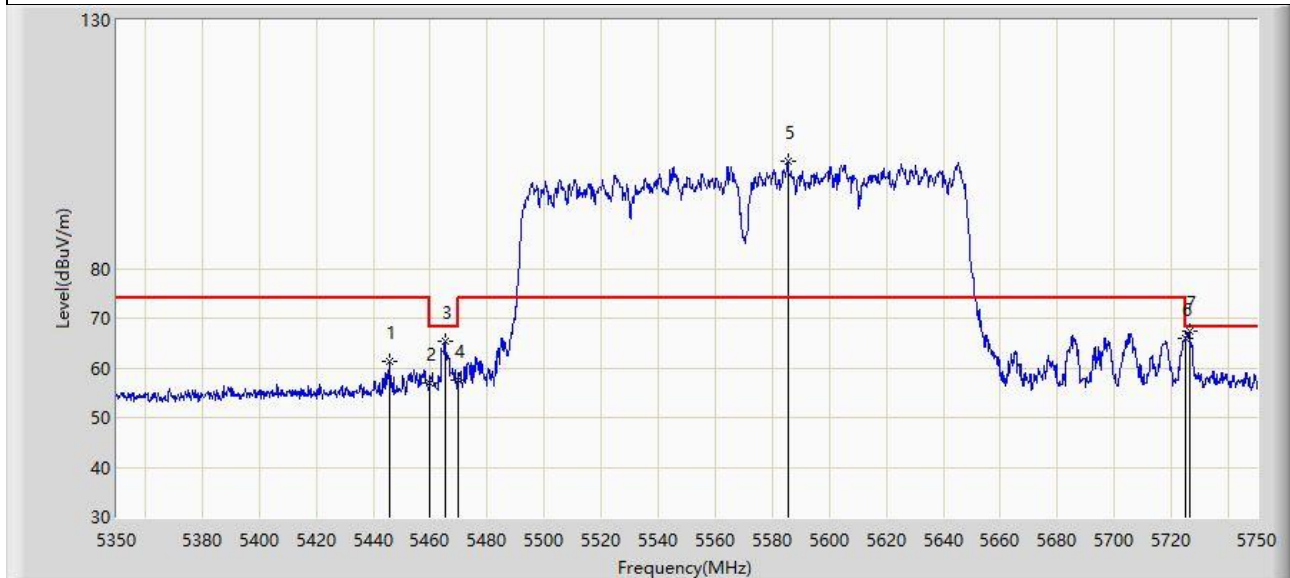


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5445.800	61.197	57.680	-12.803	74.000	3.517	PK
2		5460.000	56.931	53.321	-17.069	74.000	3.610	PK
3		5465.200	65.415	61.707	-2.785	68.200	3.707	PK
4		5470.000	57.421	53.623	-10.779	68.200	3.797	PK
5		5585.400	101.673	97.769	N/A	N/A	3.905	PK
6		5725.000	65.997	60.863	-2.203	68.200	5.134	PK
7	*	5726.200	67.380	62.239	-0.820	68.200	5.141	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-24
Limit: FCC_5G_RE (3 m)	Engineer: Carl Jiang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570 MHz	

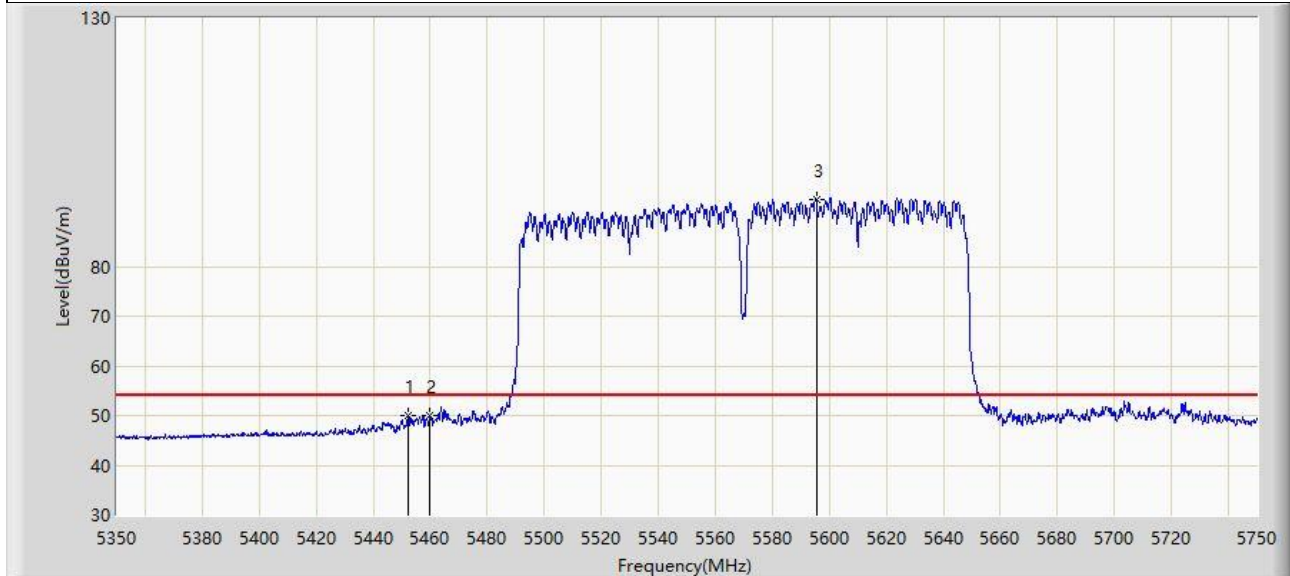

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5452.400	50.142	46.644	-3.858	54.000	3.498	AV
2		5460.000	49.931	46.321	-4.069	54.000	3.610	AV
3		5595.400	93.613	89.698	N/A	N/A	3.915	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180 MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.655	67.521	63.746	-6.479	74.000	3.775	PK
2		5150.000	64.733	60.953	-9.267	74.000	3.780	PK
3		5178.400	115.321	111.632	N/A	N/A	3.689	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180 MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.735	53.097	49.318	-0.903	54.000	3.779	AV
2		5150.000	52.328	48.548	-1.672	54.000	3.780	AV
3		5174.710	104.112	100.366	N/A	N/A	3.746	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.115	68.836	65.063	-5.164	74.000	3.773	PK
2		5150.000	66.809	63.029	-7.191	74.000	3.780	PK
3		5176.870	117.245	113.532	N/A	N/A	3.713	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180 MHz	

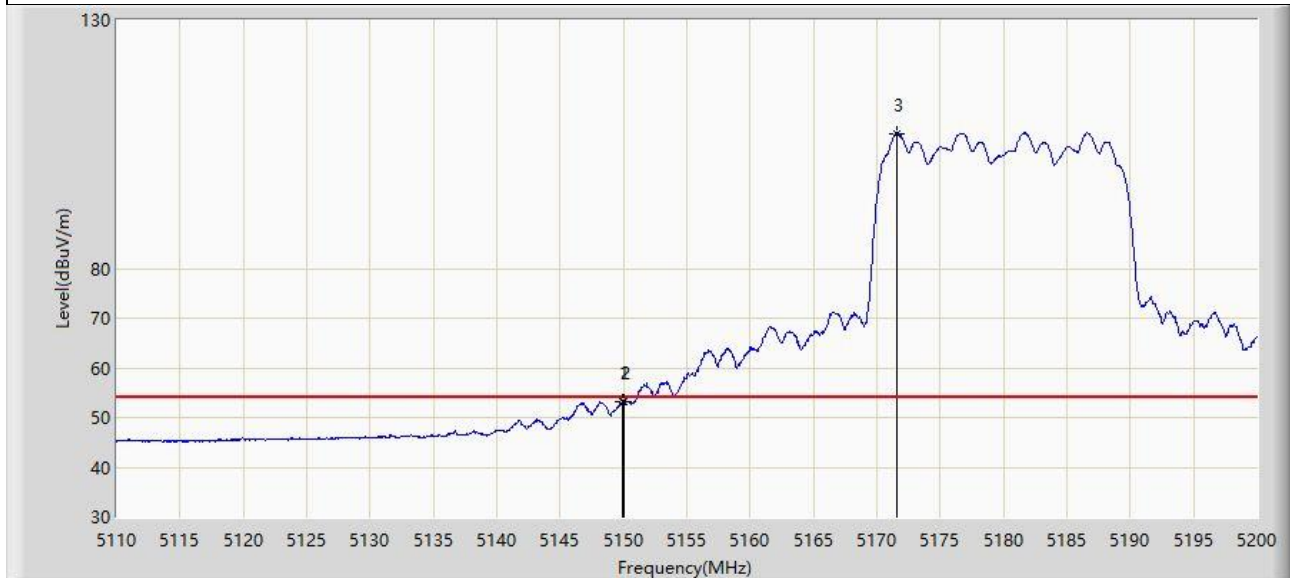


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.960	53.102	49.323	-0.898	54.000	3.780	AV
2		5150.000	53.078	49.298	-0.922	54.000	3.780	AV
3		5171.560	107.207	103.413	N/A	N/A	3.795	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320 MHz	

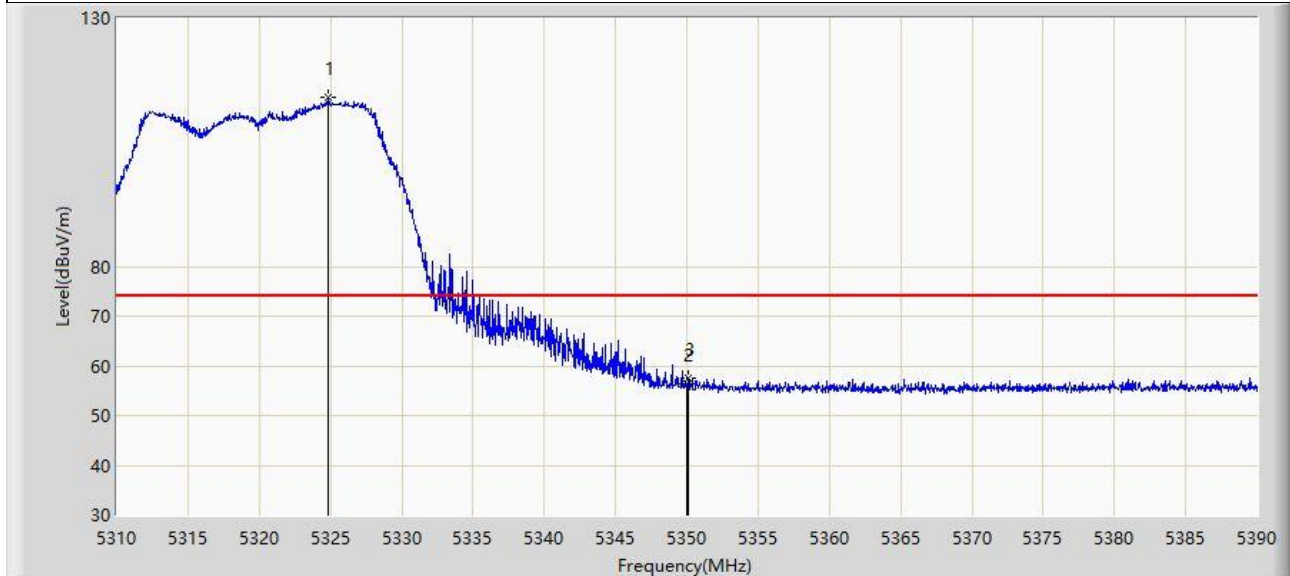


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5324.800	114.086	110.348	N/A	N/A	3.738	PK
2		5350.000	56.268	52.945	-17.732	74.000	3.323	PK
3	*	5350.120	57.658	54.338	-16.342	74.000	3.320	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320 MHz	

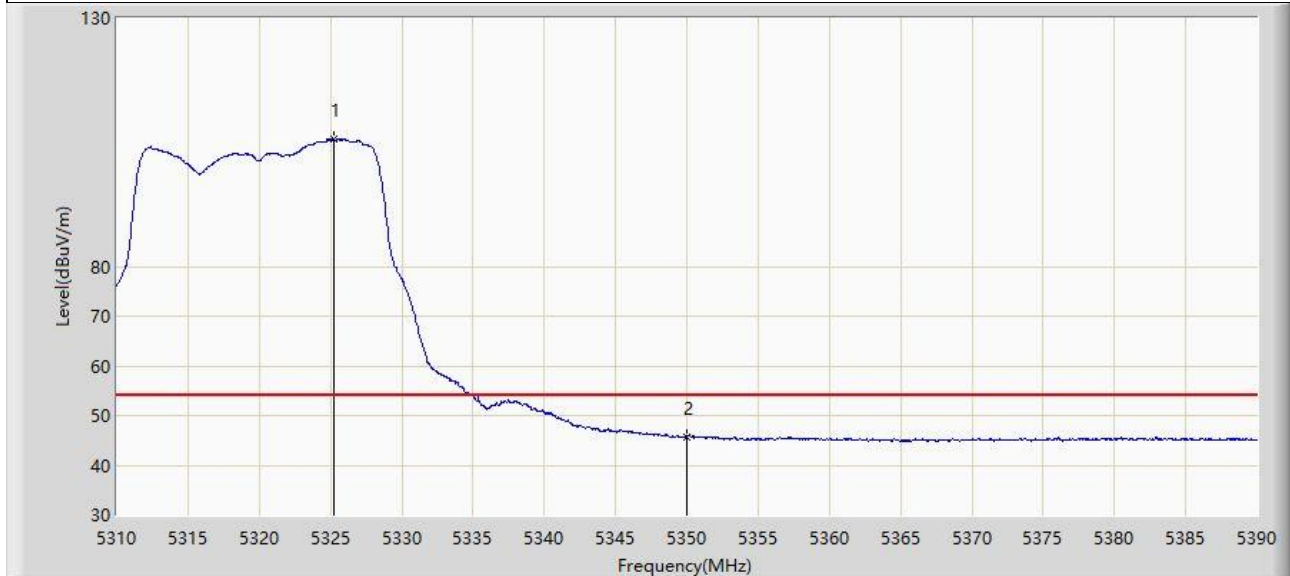


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5325.280	105.623	101.882	N/A	N/A	3.741	AV
2	*	5350.000	45.755	42.432	-8.245	54.000	3.323	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320 MHz	

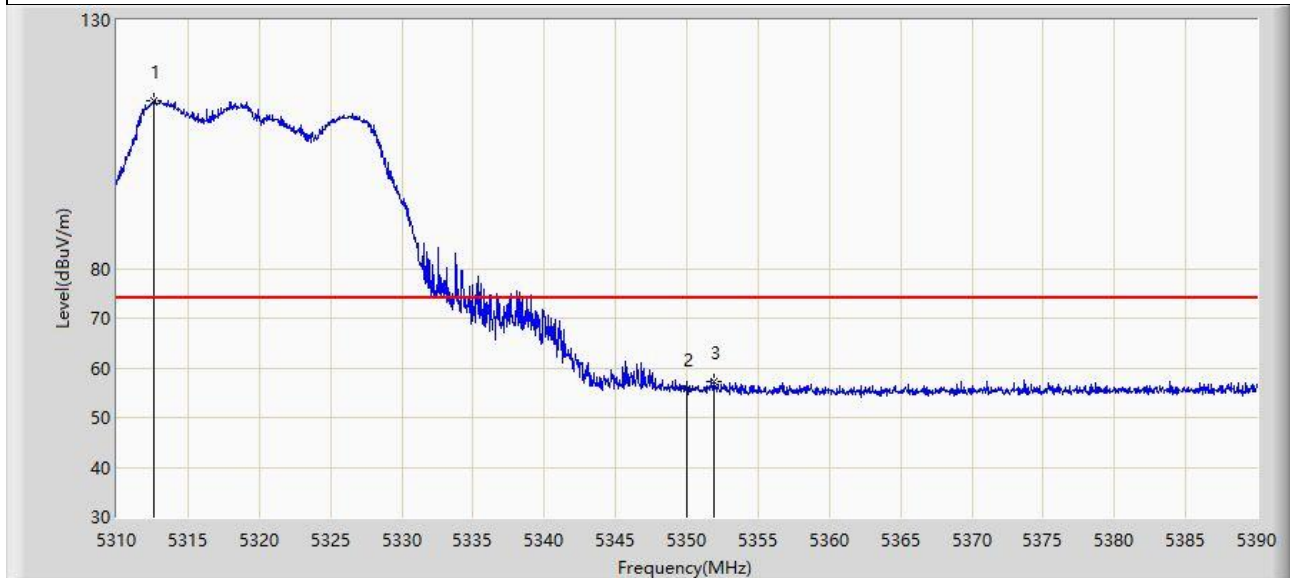


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.600	113.812	110.245	N/A	N/A	3.566	PK
2		5350.000	55.833	52.510	-18.167	74.000	3.323	PK
3	*	5351.880	57.300	54.025	-16.700	74.000	3.275	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320 MHz	

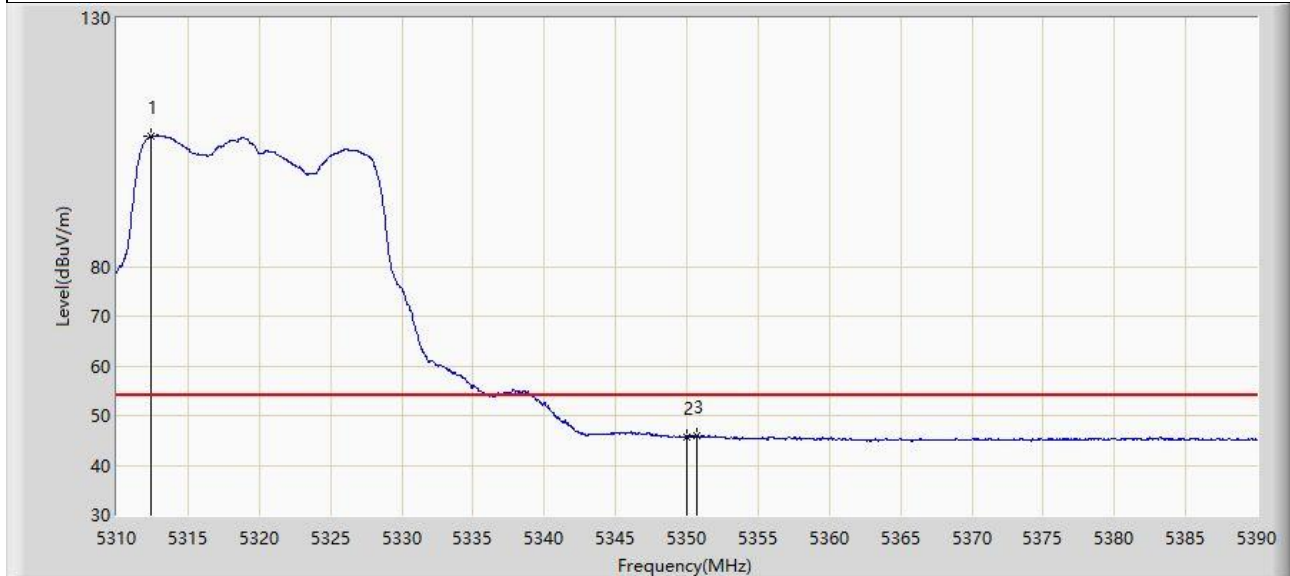


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.440	106.315	102.751	N/A	N/A	3.564	AV
2		5350.000	45.730	42.407	-8.270	54.000	3.323	AV
3	*	5350.680	46.039	42.733	-7.961	54.000	3.306	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500 MHz	

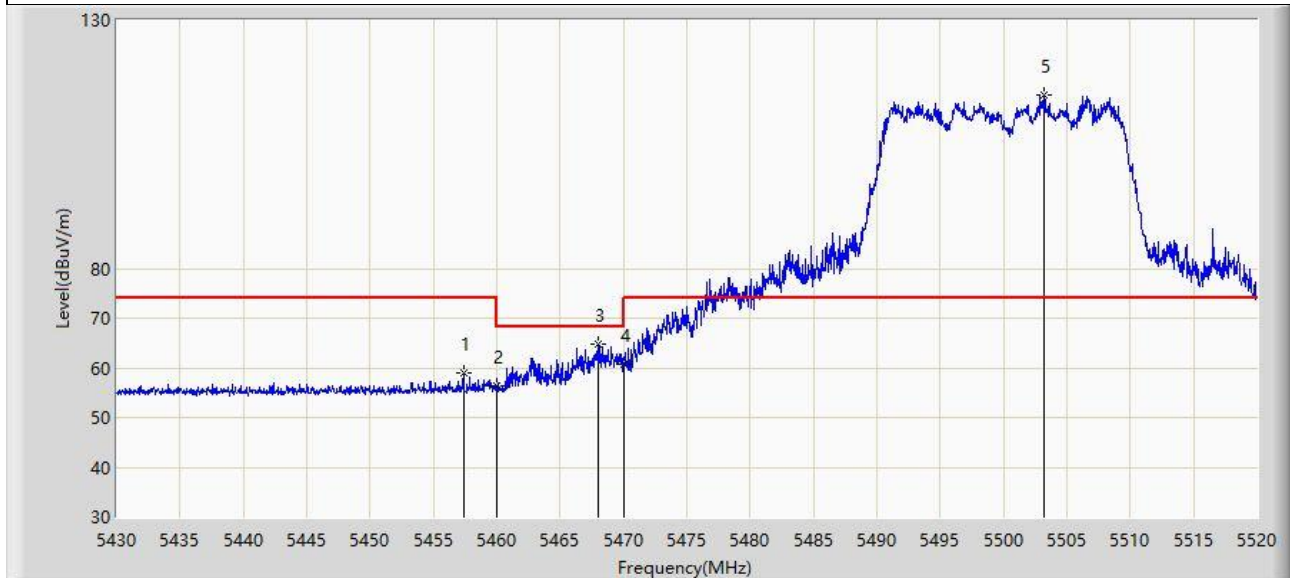

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.360	58.880	55.319	-15.120	74.000	3.561	PK
2		5460.000	56.321	52.711	-17.679	74.000	3.610	PK
3	*	5468.025	64.662	60.901	-3.538	68.200	3.761	PK
4		5470.000	60.722	56.924	-7.478	68.200	3.797	PK
5		5503.215	114.993	111.409	N/A	N/A	3.584	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	45.630	42.020	-8.370	54.000	3.610	AV
2		5506.455	103.789	100.249	N/A	N/A	3.540	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500 MHz	

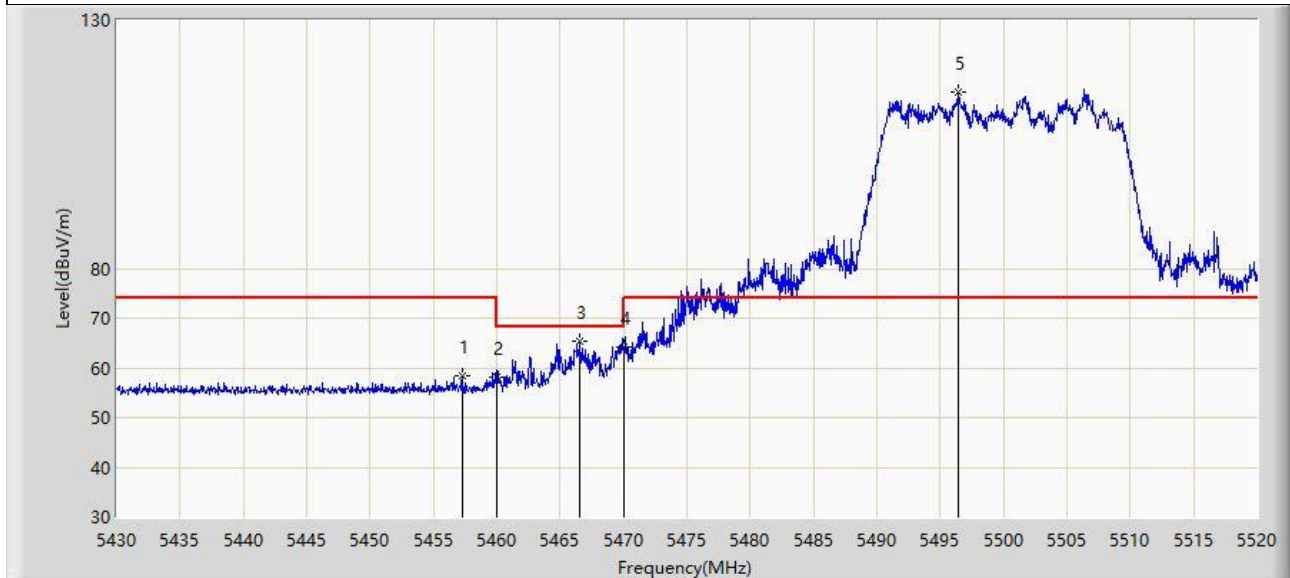


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.270	58.426	54.867	-15.574	74.000	3.559	PK
2		5460.000	58.251	54.641	-15.749	74.000	3.610	PK
3	*	5466.585	65.330	61.596	-2.870	68.200	3.734	PK
4		5470.000	64.214	60.416	-3.986	68.200	3.797	PK
5		5496.465	115.596	111.930	N/A	N/A	3.666	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500 MHz	

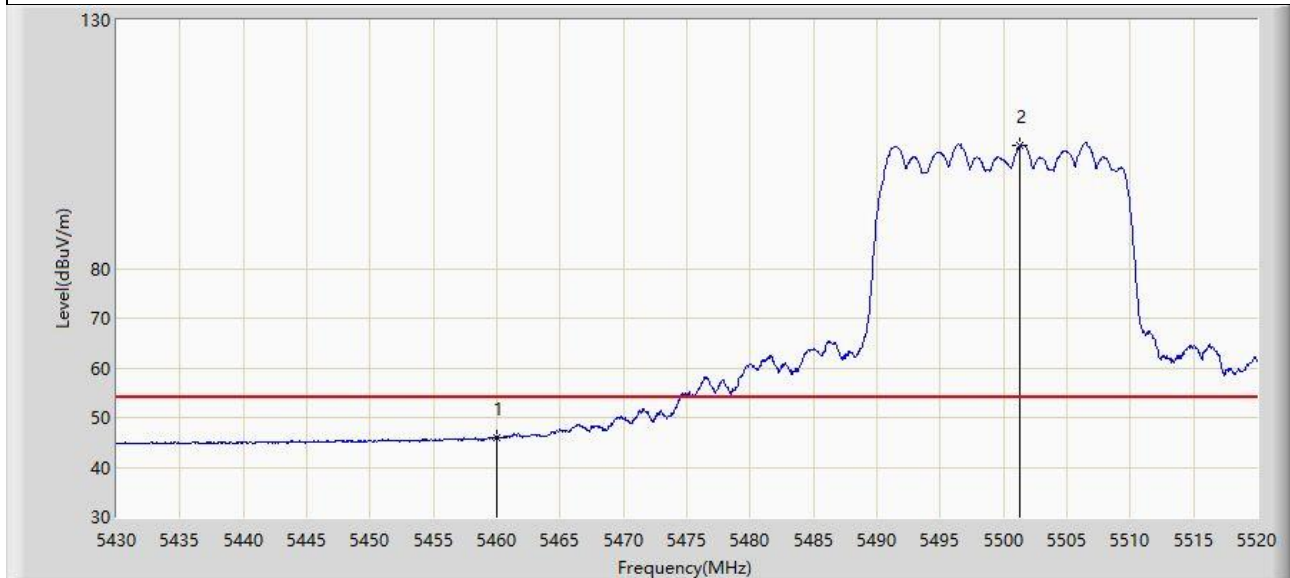


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	46.061	42.451	-7.939	54.000	3.610	AV
2		5501.325	104.710	101.103	N/A	N/A	3.607	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700 MHz	

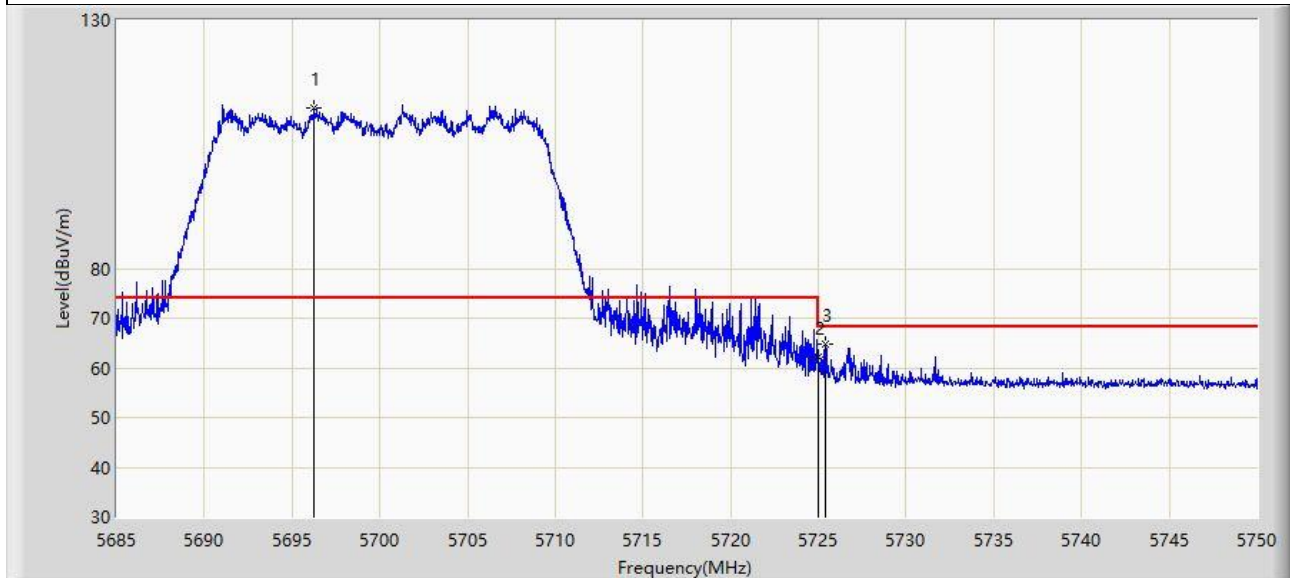


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5696.277	112.461	107.654	N/A	N/A	4.807	PK
2		5725.000	62.055	56.921	-6.145	68.200	5.134	PK
3	*	5725.365	64.850	59.713	-3.350	68.200	5.138	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700 MHz	

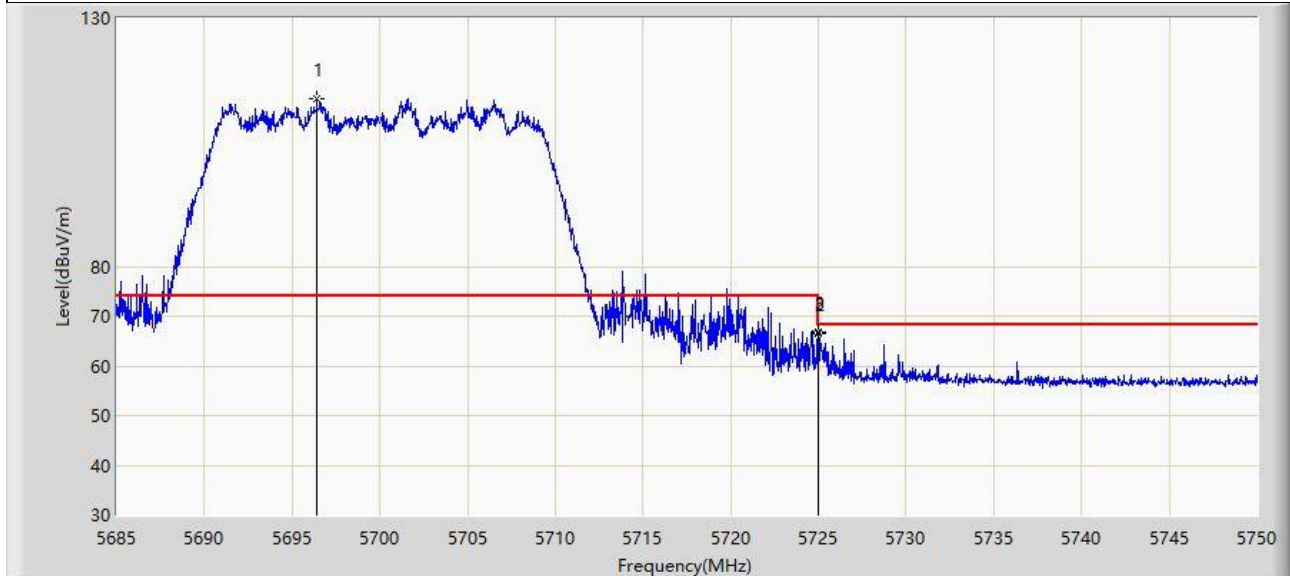


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5696.408	113.874	109.065	N/A	N/A	4.809	PK
2		5725.000	66.504	61.370	-1.696	68.200	5.134	PK
3	*	5725.007	66.928	61.794	-1.272	68.200	5.134	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745 MHz	

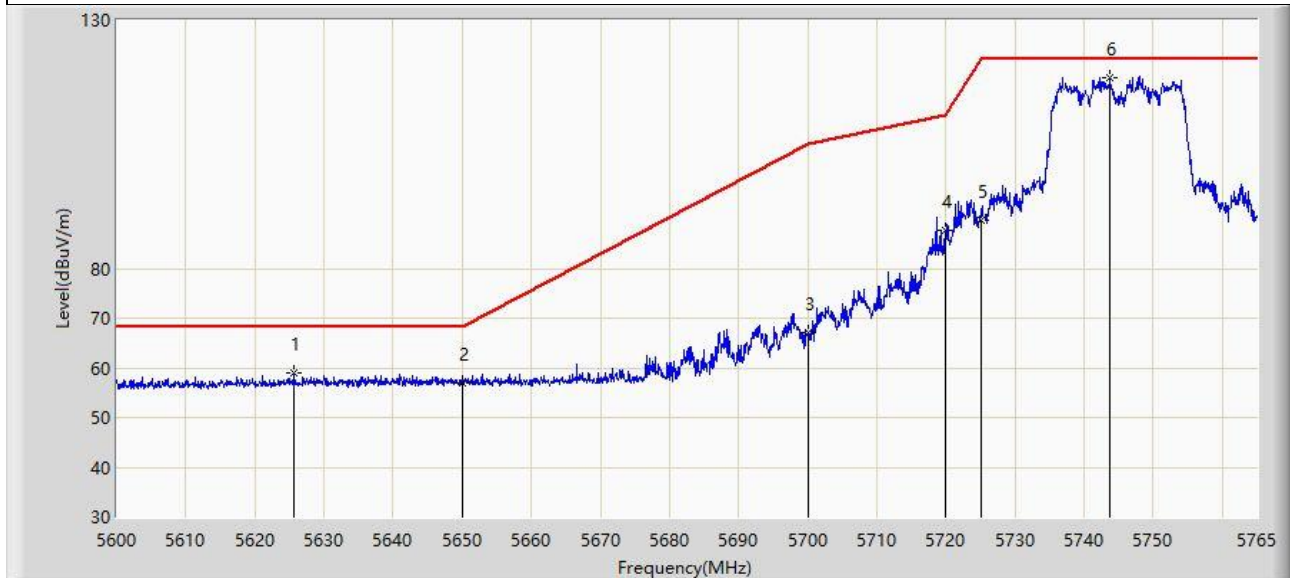


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5625.740	58.984	54.546	-9.216	68.200	4.438	PK
2		5650.000	57.071	52.568	-11.129	68.200	4.502	PK
3		5700.000	67.108	62.245	-38.092	105.200	4.863	PK
4		5720.000	87.759	82.666	-23.041	110.800	5.093	PK
5		5725.000	89.766	84.632	-32.434	122.200	5.134	PK
6		5743.797	118.463	113.500	N/A	N/A	4.964	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745 MHz	

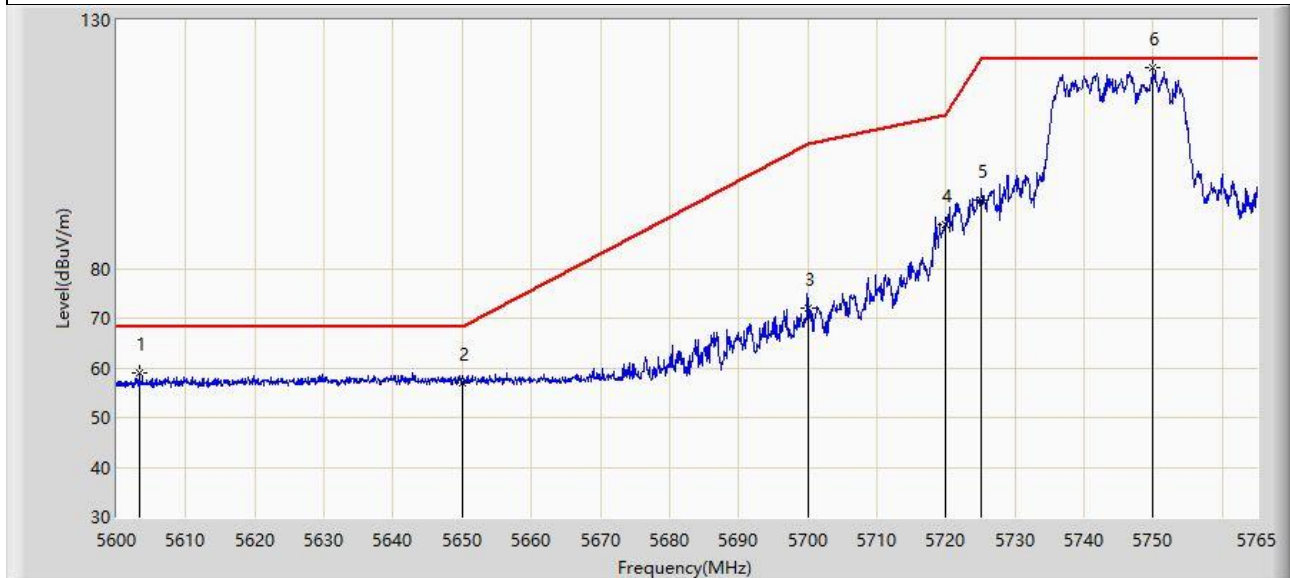


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5603.300	58.925	54.951	-9.275	68.200	3.974	PK
2		5650.000	57.052	52.549	-11.148	68.200	4.502	PK
3		5700.000	71.970	67.107	-33.230	105.200	4.863	PK
4		5720.000	88.878	83.785	-21.922	110.800	5.093	PK
5		5725.000	93.667	88.533	-28.533	122.200	5.134	PK
6		5749.902	120.503	115.514	N/A	N/A	4.989	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825 MHz	

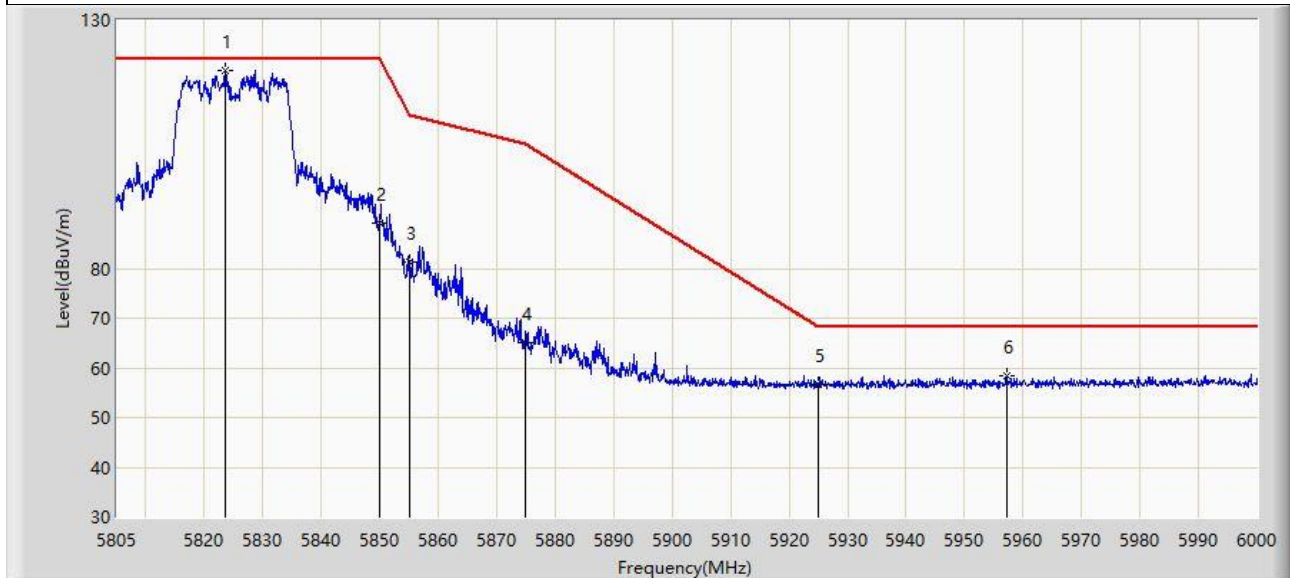


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5823.623	119.858	114.561	N/A	N/A	5.297	PK
2		5850.000	89.164	83.752	-33.036	122.200	5.412	PK
3		5855.000	81.196	75.736	-29.604	110.800	5.460	PK
4		5875.000	64.989	59.480	-40.211	105.200	5.509	PK
5		5925.000	56.786	51.277	-11.414	68.200	5.509	PK
6	*	5957.197	58.504	52.918	-9.696	68.200	5.586	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825 MHz	

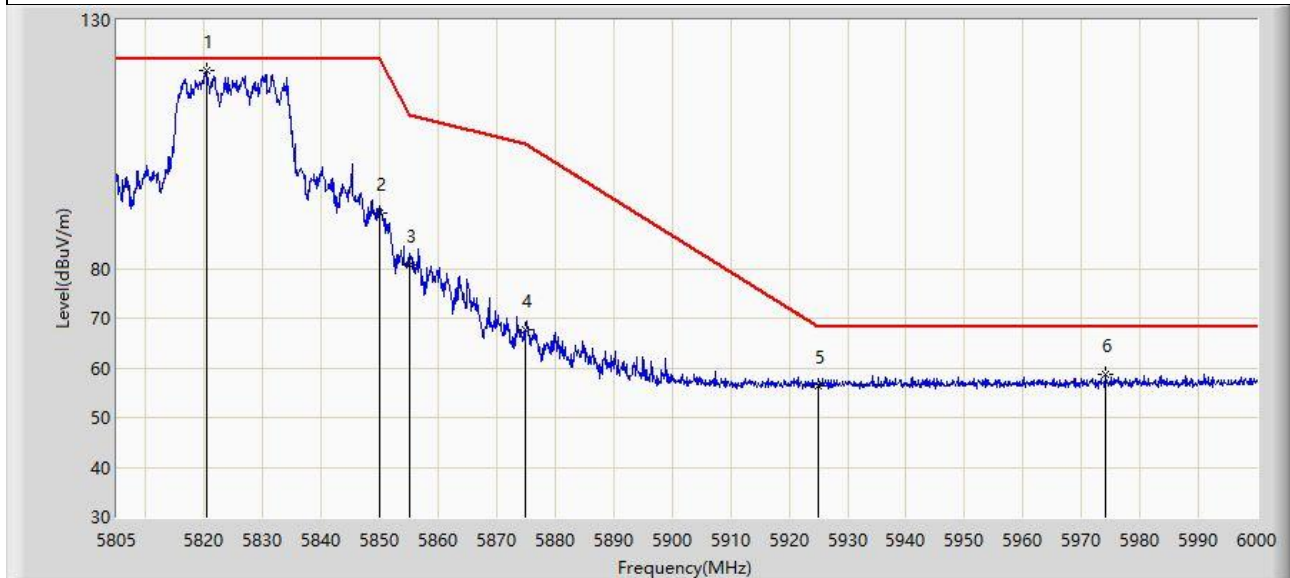

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5820.405	119.845	114.522	N/A	N/A	5.324	PK
2		5850.000	91.249	85.837	-30.951	122.200	5.412	PK
3		5855.000	80.609	75.149	-30.191	110.800	5.460	PK
4		5875.000	67.595	62.086	-37.605	105.200	5.509	PK
5		5925.000	56.393	50.884	-11.807	68.200	5.509	PK
6	*	5974.163	58.742	53.143	-9.458	68.200	5.599	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.150	70.338	66.561	-3.662	74.000	3.777	PK
2		5150.000	67.901	64.121	-6.099	74.000	3.780	PK
3		5173.550	110.484	106.720	N/A	N/A	3.764	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190 MHz	

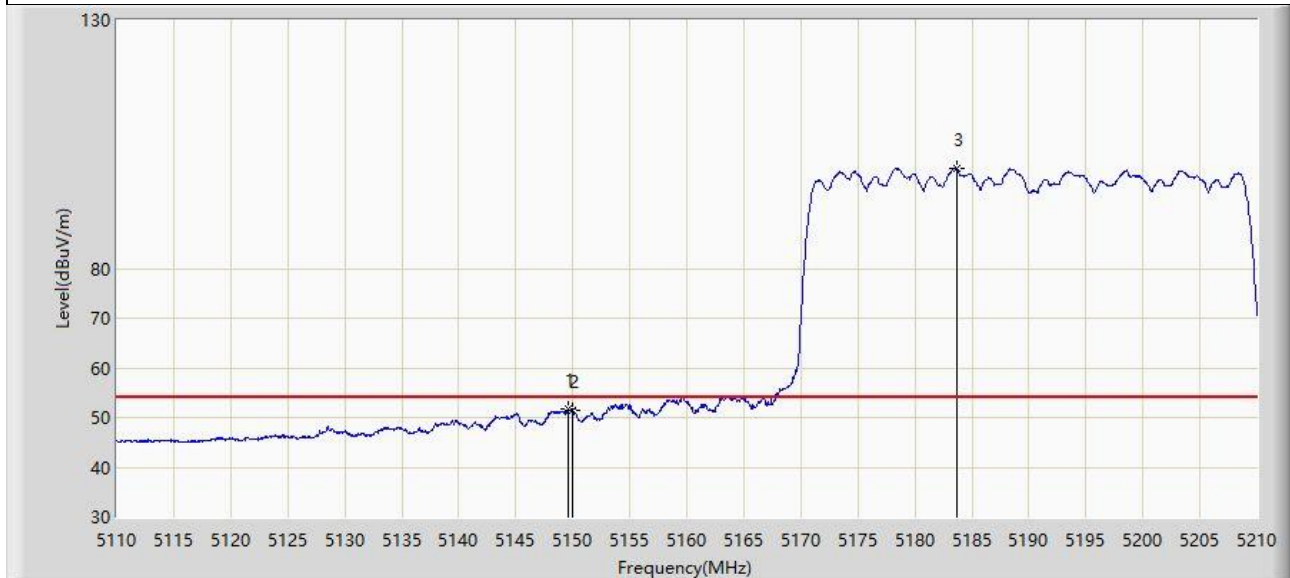


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.600	51.596	47.818	-2.404	54.000	3.778	AV
2		5150.000	51.384	47.604	-2.616	54.000	3.780	AV
3		5183.650	100.115	96.512	N/A	N/A	3.603	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190 MHz	

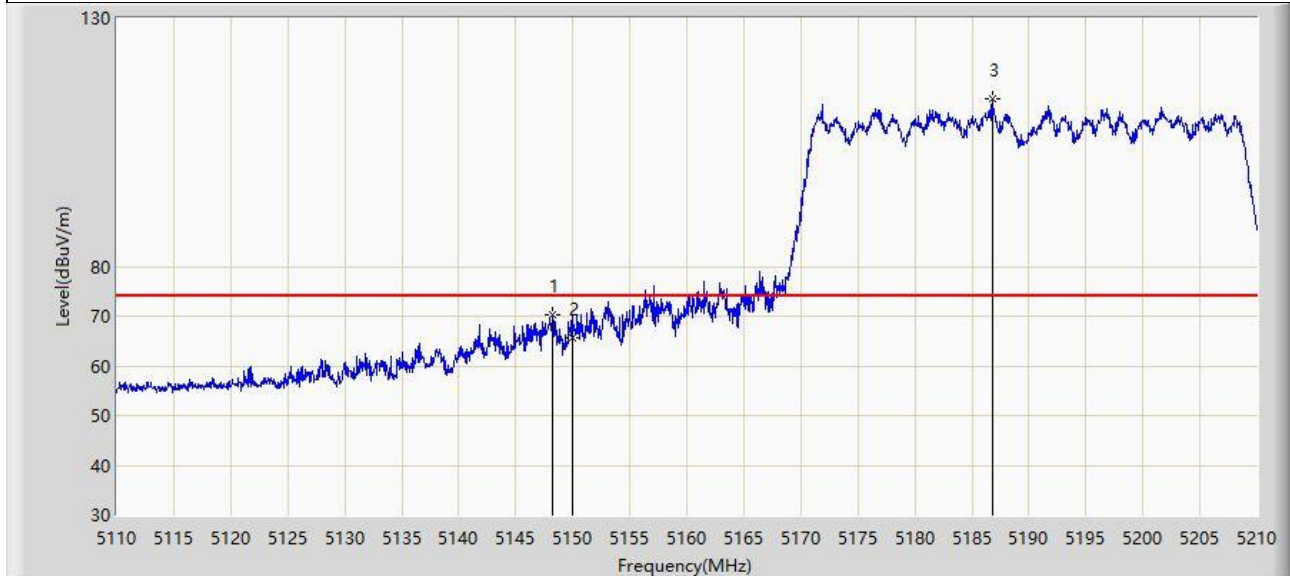


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.200	70.399	66.626	-3.601	74.000	3.773	PK
2		5150.000	65.770	61.990	-8.230	74.000	3.780	PK
3		5186.800	113.665	110.120	N/A	N/A	3.546	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190 MHz	

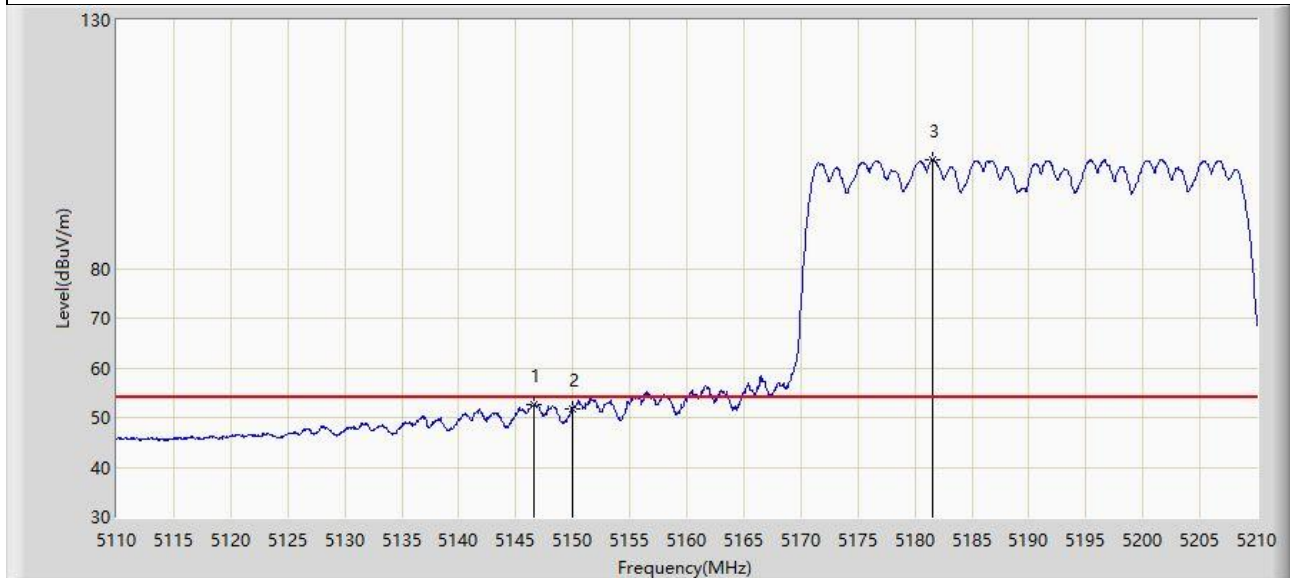


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.550	52.569	48.815	-1.431	54.000	3.755	AV
2		5150.000	51.827	48.047	-2.173	54.000	3.780	AV
3		5181.550	101.965	98.324	N/A	N/A	3.641	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310 MHz	

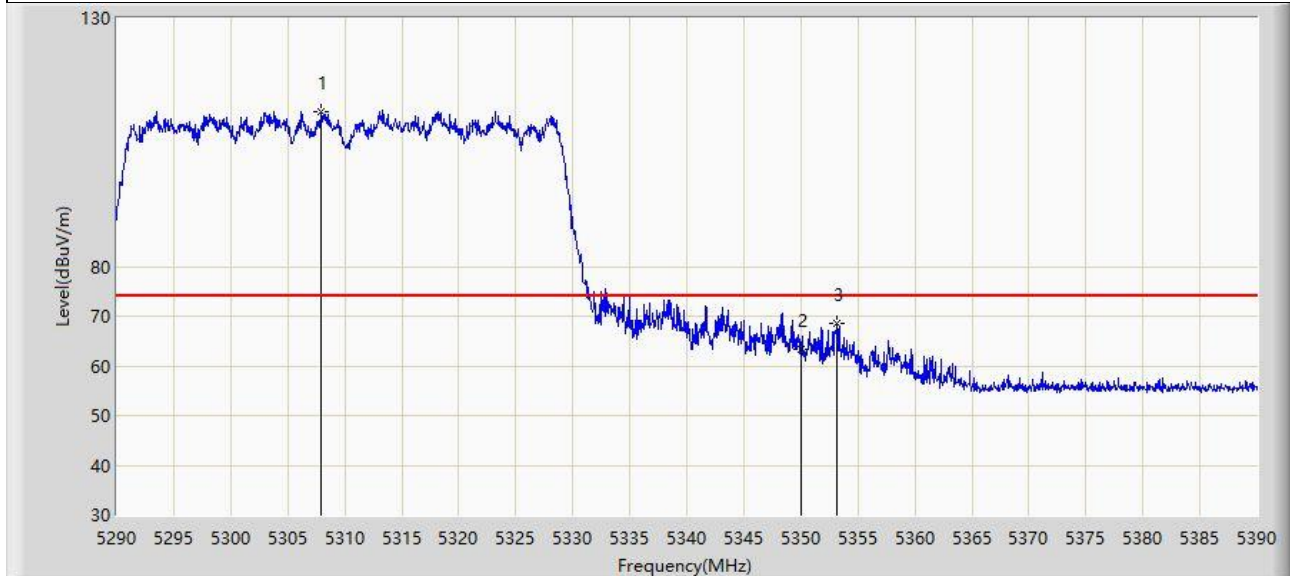


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5307.950	111.254	107.777	N/A	N/A	3.477	PK
2		5350.000	63.383	60.060	-10.617	74.000	3.323	PK
3	*	5353.200	68.437	65.171	-5.563	74.000	3.267	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310 MHz	

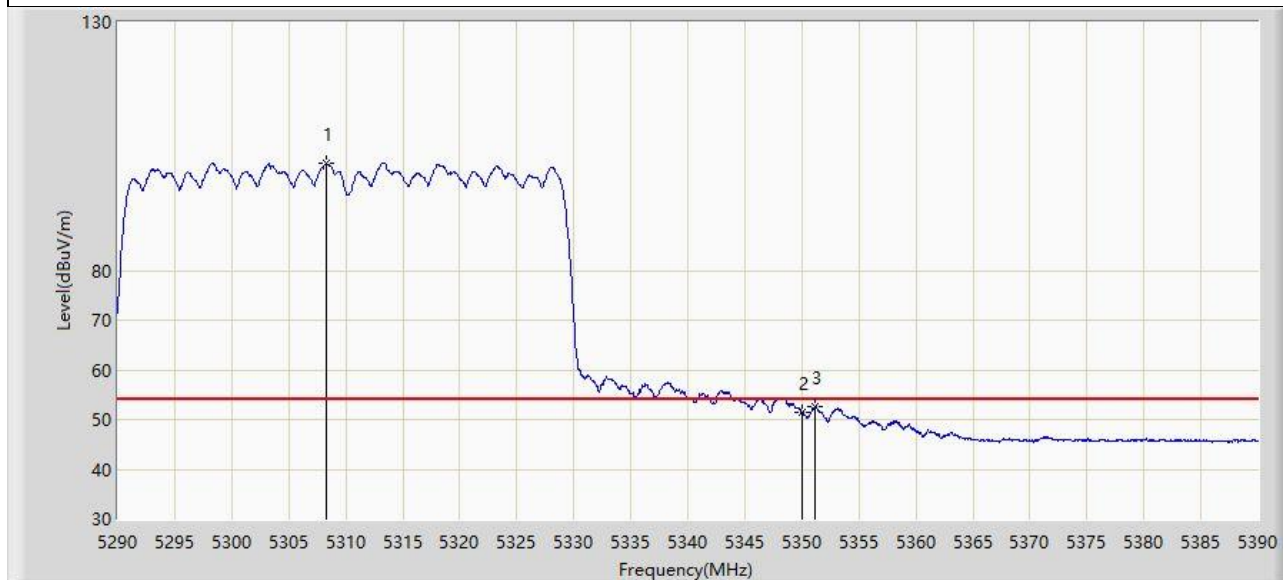


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5308.350	101.593	98.108	N/A	N/A	3.484	AV
2		5350.000	51.365	48.042	-2.635	54.000	3.323	AV
3	*	5351.200	52.629	49.337	-1.371	54.000	3.293	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310 MHz	

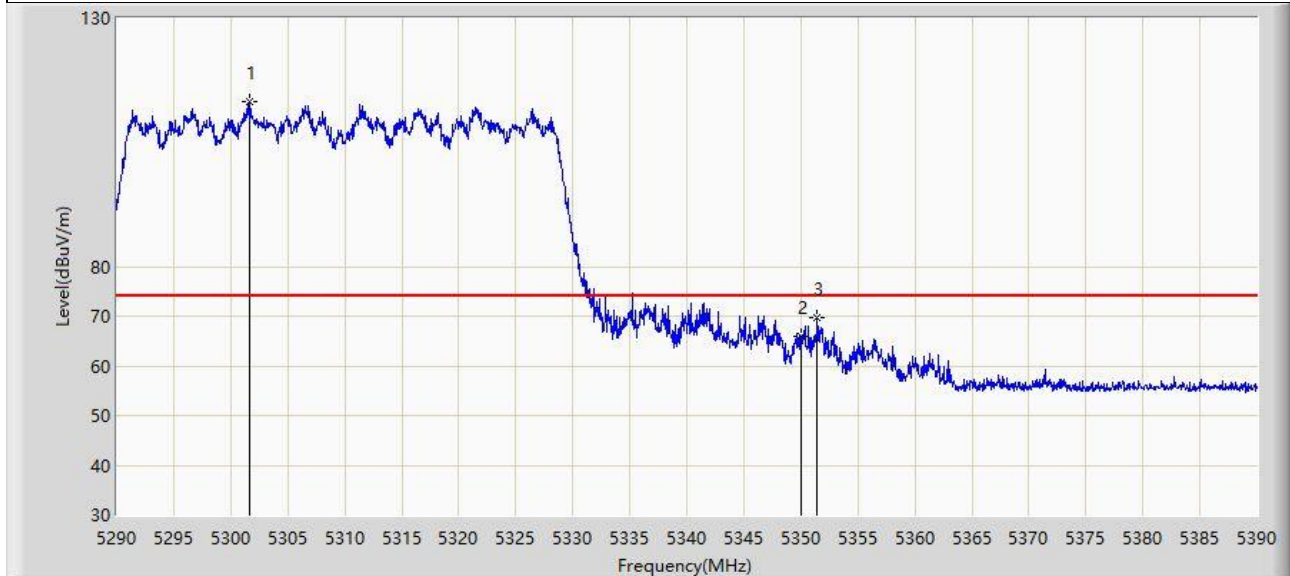


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5301.600	113.306	109.953	N/A	N/A	3.354	PK
2		5350.000	65.891	62.568	-8.109	74.000	3.323	PK
3	*	5351.400	69.684	66.397	-4.316	74.000	3.287	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310 MHz	

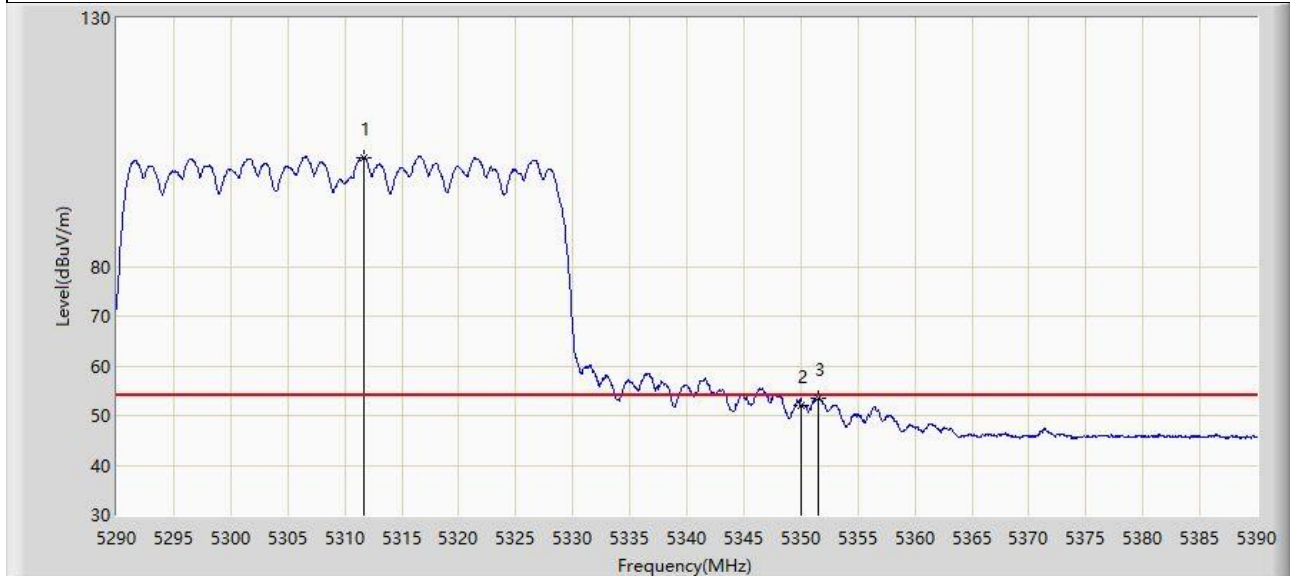


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.700	101.943	98.393	N/A	N/A	3.550	AV
2		5350.000	52.027	48.704	-1.973	54.000	3.323	AV
3	*	5351.550	53.451	50.168	-0.549	54.000	3.283	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510 MHz	

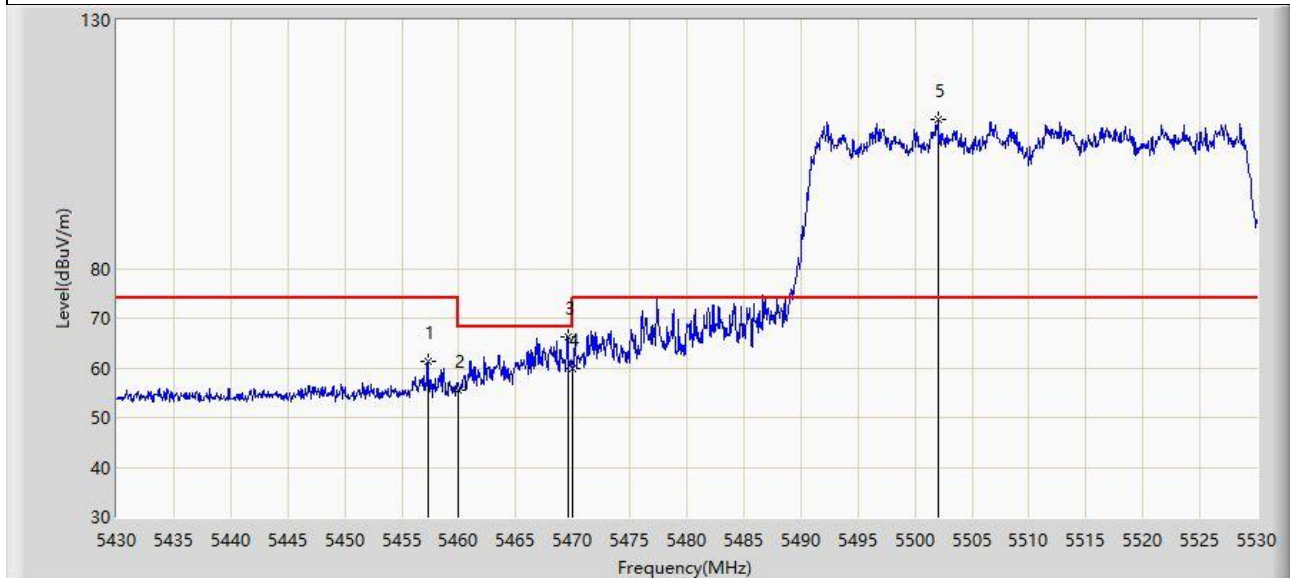

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.300	61.352	57.792	-12.648	74.000	3.559	PK
2		5460.000	55.395	51.785	-18.605	74.000	3.610	PK
3	*	5469.550	66.296	62.507	-1.904	68.200	3.789	PK
4		5470.000	59.905	56.107	-8.295	68.200	3.797	PK
5		5502.000	109.967	106.368	N/A	N/A	3.599	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5458.350	48.063	44.484	-5.937	54.000	3.579	AV
2		5460.000	47.418	43.808	-6.582	54.000	3.610	AV
3		5526.600	100.748	97.264	N/A	N/A	3.484	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510 MHz	

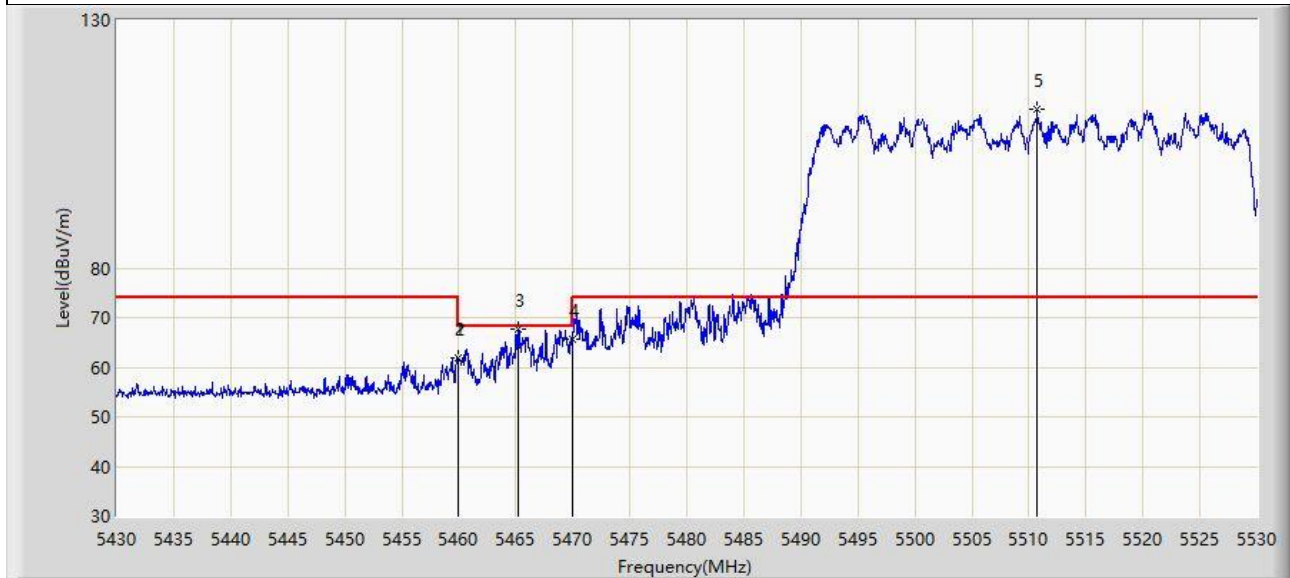

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.950	62.009	58.400	-11.991	74.000	3.609	PK
2		5460.000	61.900	58.290	-12.100	74.000	3.610	PK
3	*	5465.250	67.559	63.850	-0.641	68.200	3.709	PK
4		5470.000	65.621	61.823	-2.579	68.200	3.797	PK
5		5510.700	111.900	108.425	N/A	N/A	3.474	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510 MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	49.054	45.444	-4.946	54.000	3.610	AV
2		5505.250	101.629	98.070	N/A	N/A	3.558	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5672.300	113.257	108.824	N/A	N/A	4.432	PK
2		5725.000	64.290	59.156	-3.910	68.200	5.134	PK
3	*	5726.300	65.906	60.766	-2.294	68.200	5.140	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-18
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670 MHz	

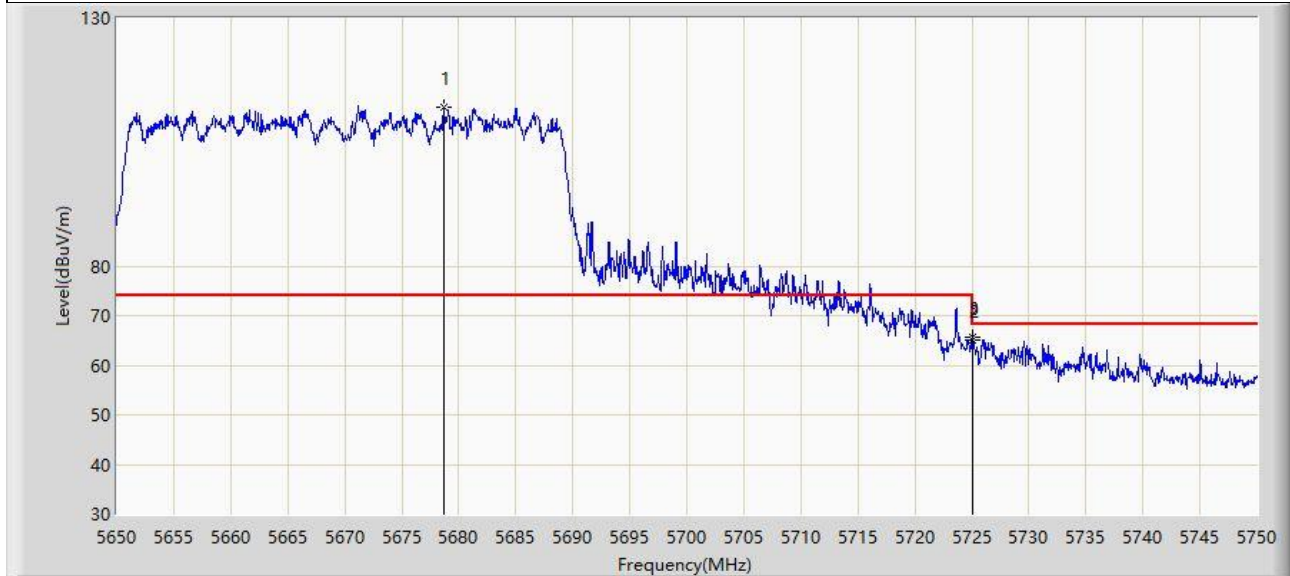


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5678.650	112.121	107.622	N/A	N/A	4.499	PK
2		5725.000	65.102	59.968	-3.098	68.200	5.134	PK
3	*	5725.050	65.678	60.543	-2.522	68.200	5.134	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755 MHz	

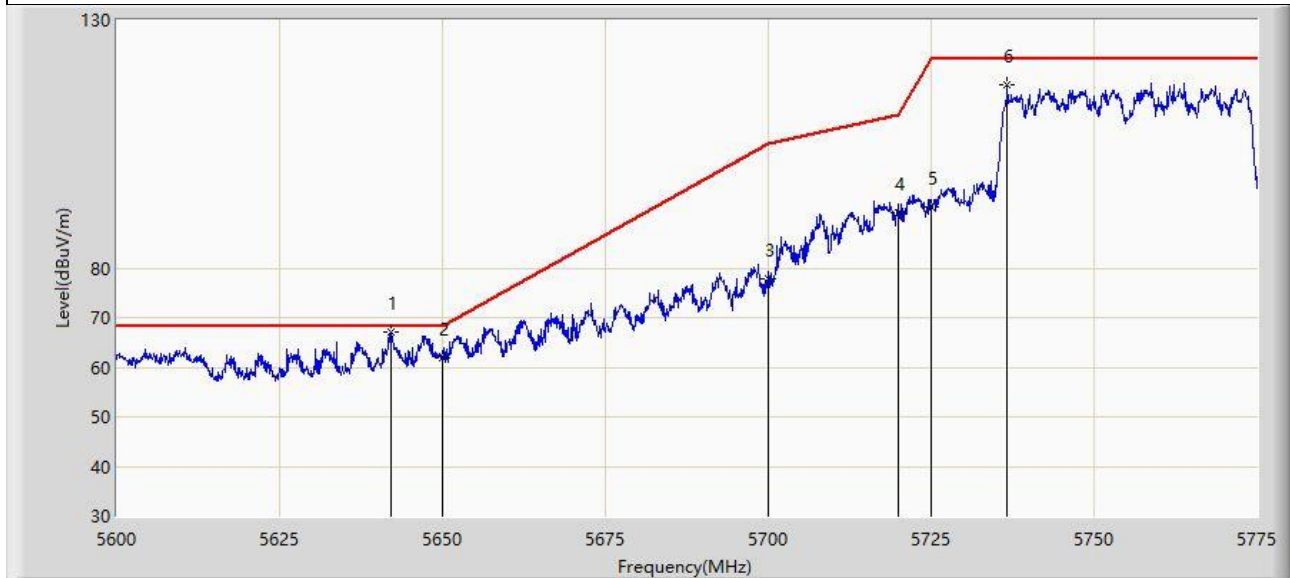


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5642.175	67.188	62.616	-1.012	68.200	4.572	PK
2		5650.000	61.946	57.443	-6.254	68.200	4.502	PK
3		5700.000	77.764	72.901	-27.436	105.200	4.863	PK
4		5720.000	91.246	86.153	-19.554	110.800	5.093	PK
5		5725.000	92.429	87.295	-29.771	122.200	5.134	PK
6		5736.675	116.906	111.879	N/A	N/A	5.026	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755 MHz	

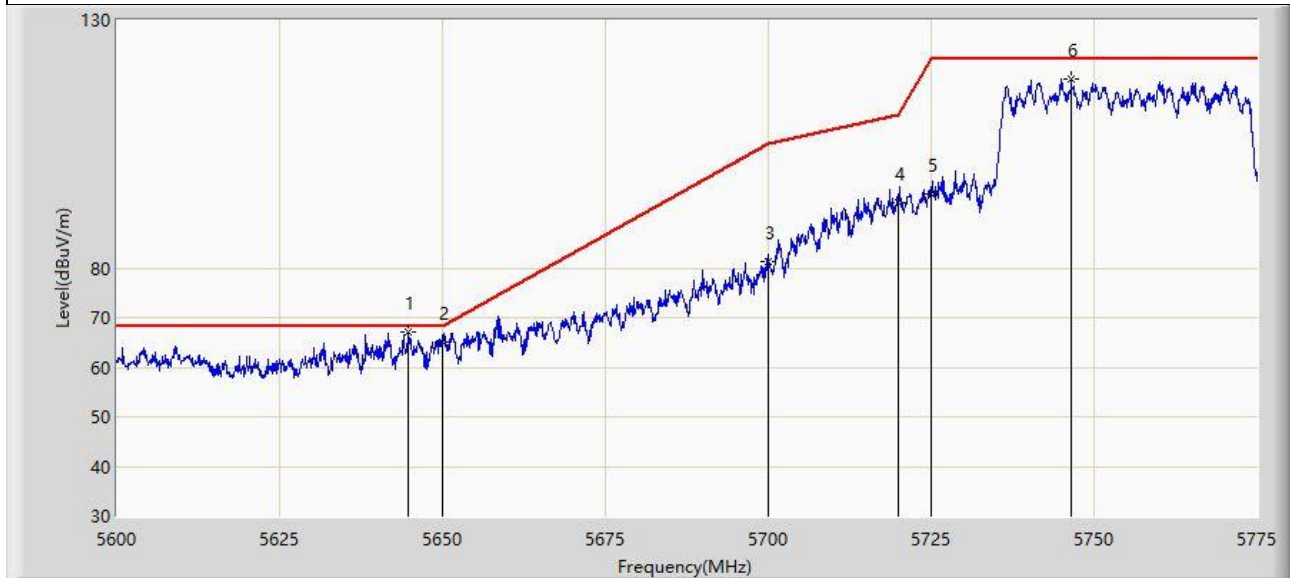


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5644.800	67.182	62.634	-1.018	68.200	4.548	PK
2		5650.000	65.152	60.649	-3.048	68.200	4.502	PK
3		5700.000	81.275	76.412	-23.925	105.200	4.863	PK
4		5720.000	93.147	88.054	-17.653	110.800	5.093	PK
5		5725.000	94.884	89.750	-27.316	122.200	5.134	PK
6		5746.475	118.148	113.172	N/A	N/A	4.975	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795 MHz	

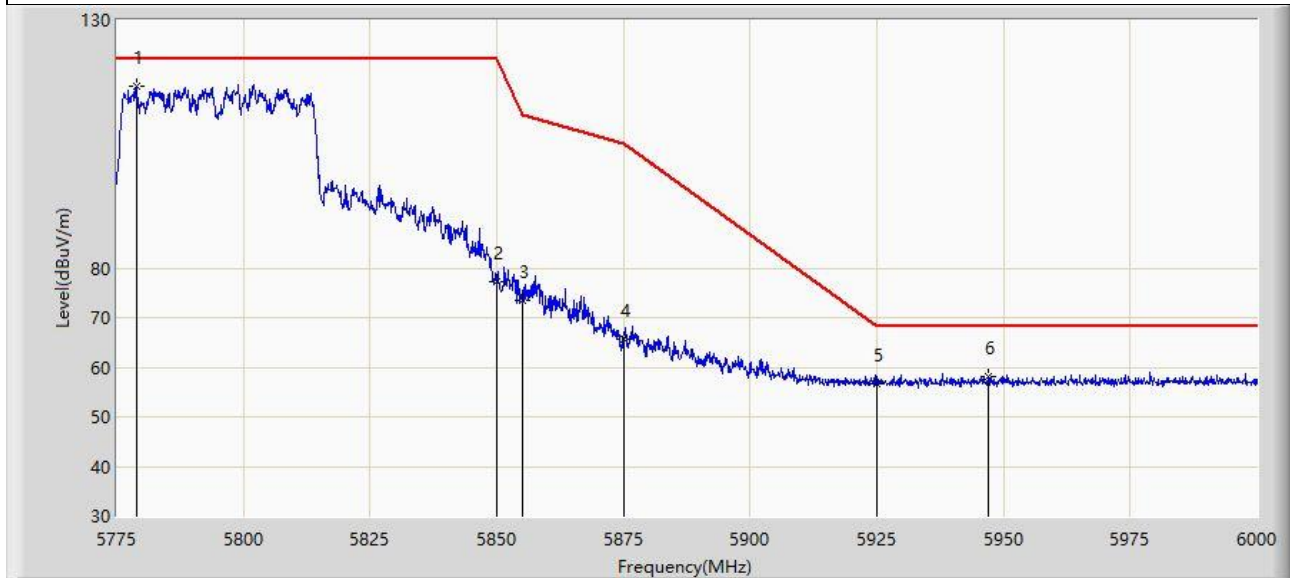


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5778.825	116.654	111.389	N/A	N/A	5.265	PK
2		5850.000	77.178	71.766	-45.022	122.200	5.412	PK
3		5855.000	73.469	68.009	-37.331	110.800	5.460	PK
4		5875.000	65.632	60.123	-39.568	105.200	5.509	PK
5		5925.000	56.760	51.251	-11.440	68.200	5.509	PK
6	*	5946.900	58.115	52.518	-10.085	68.200	5.597	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795 MHz	

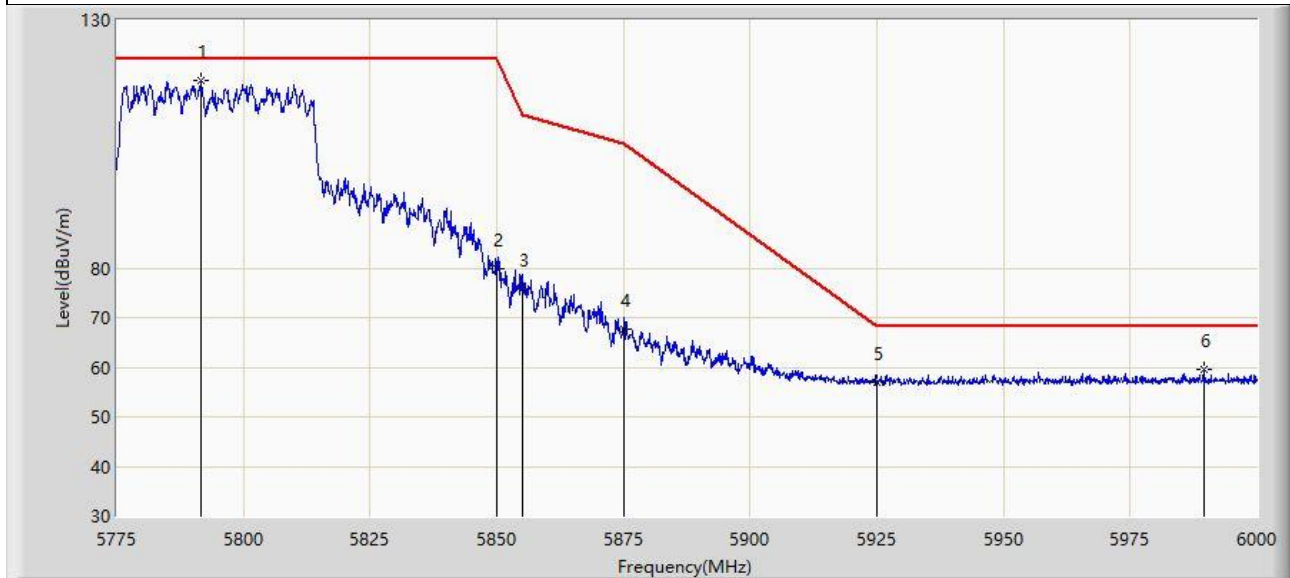


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5791.650	117.860	112.467	N/A	N/A	5.393	PK
2		5850.000	79.936	74.524	-42.264	122.200	5.412	PK
3		5855.000	75.733	70.273	-35.067	110.800	5.460	PK
4		5875.000	67.720	62.211	-37.480	105.200	5.509	PK
5		5925.000	56.991	51.482	-11.209	68.200	5.509	PK
6	*	5989.538	59.567	53.944	-8.633	68.200	5.623	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210 MHz	

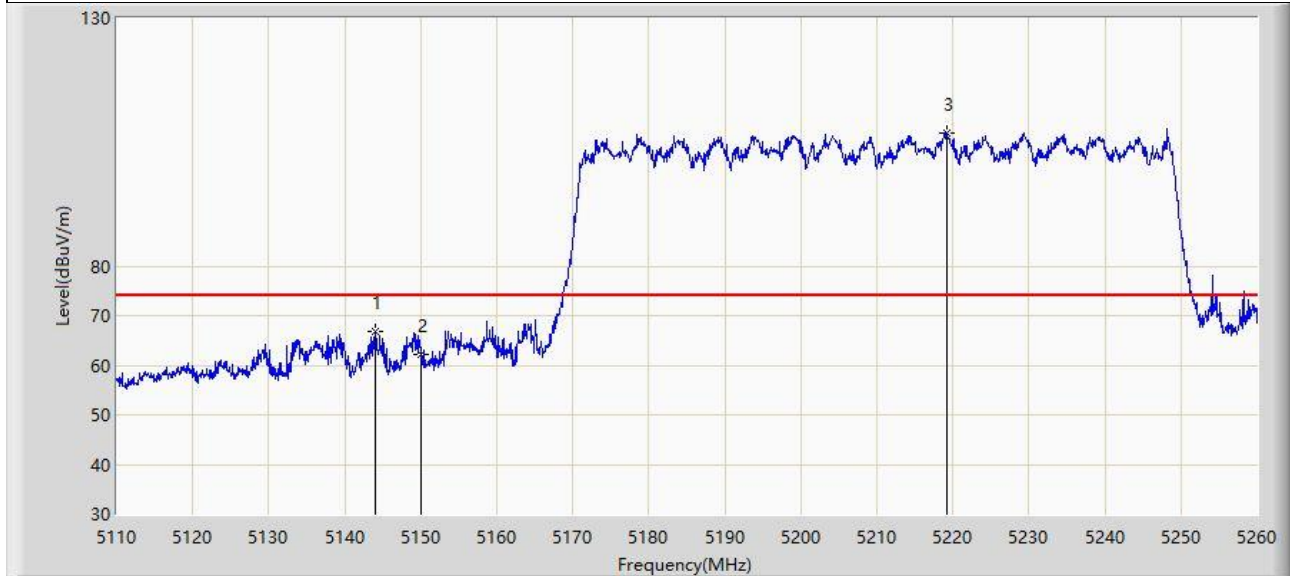


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.050	66.871	63.150	-7.129	74.000	3.721	PK
2		5150.000	62.196	58.416	-11.804	74.000	3.780	PK
3		5219.125	106.772	103.397	N/A	N/A	3.374	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210 MHz	

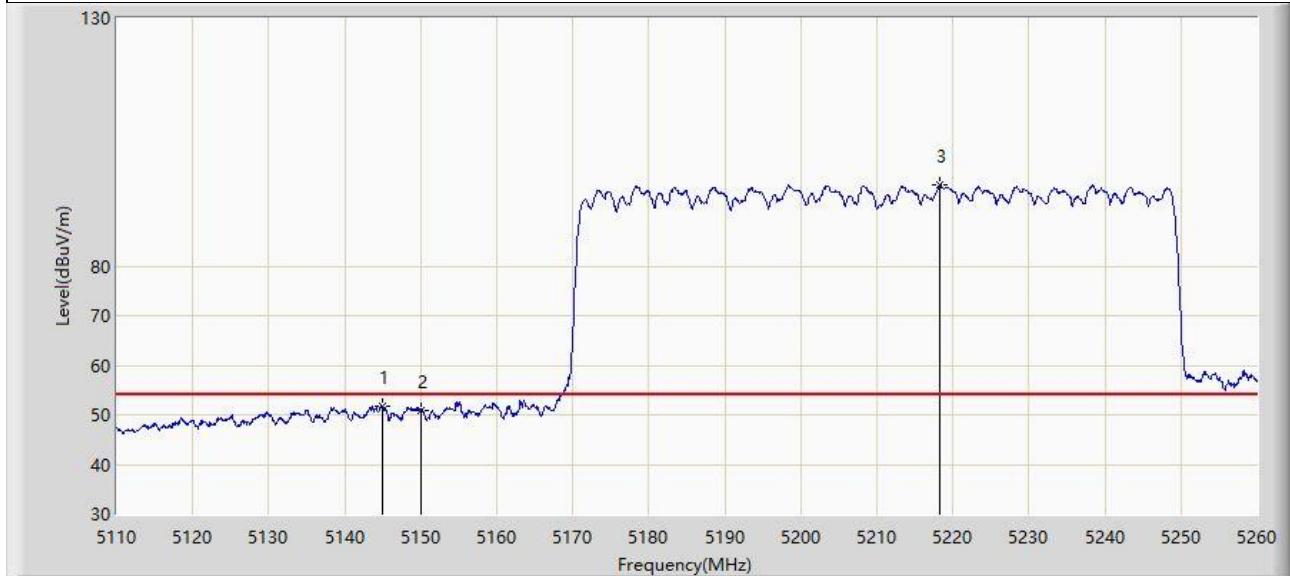


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.950	51.678	47.945	-2.322	54.000	3.733	AV
2		5150.000	50.896	47.116	-3.104	54.000	3.780	AV
3		5218.300	96.356	92.992	N/A	N/A	3.365	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210 MHz	

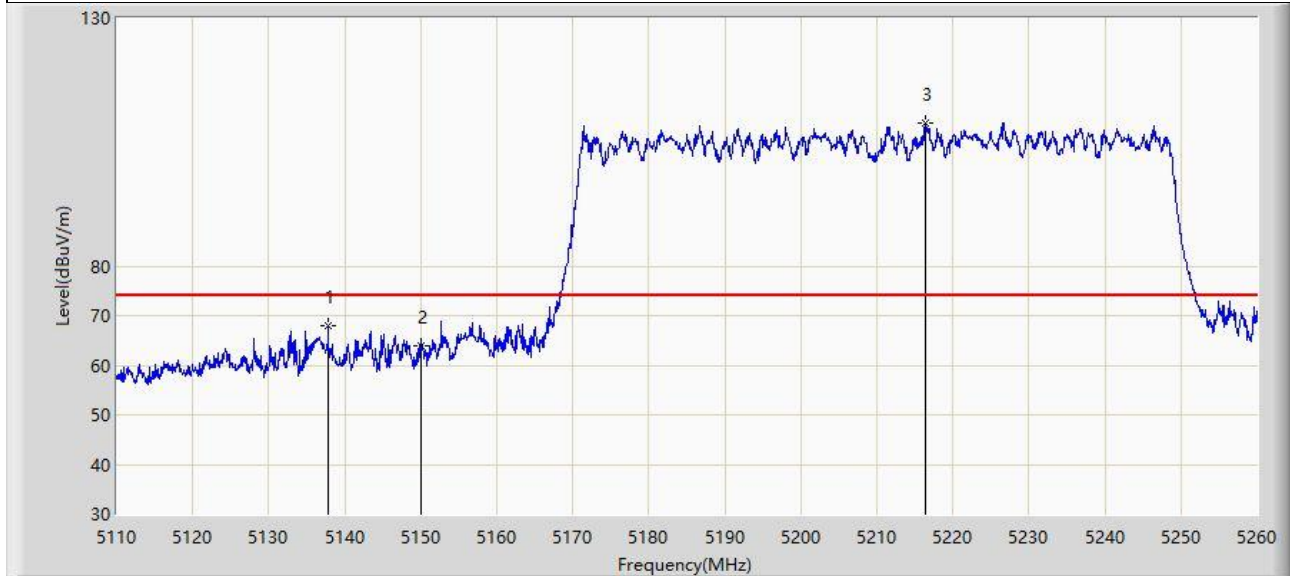


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5137.825	68.070	64.431	-5.930	74.000	3.640	PK
2		5150.000	64.024	60.244	-9.976	74.000	3.780	PK
3		5216.350	108.883	105.545	N/A	N/A	3.338	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210 MHz	

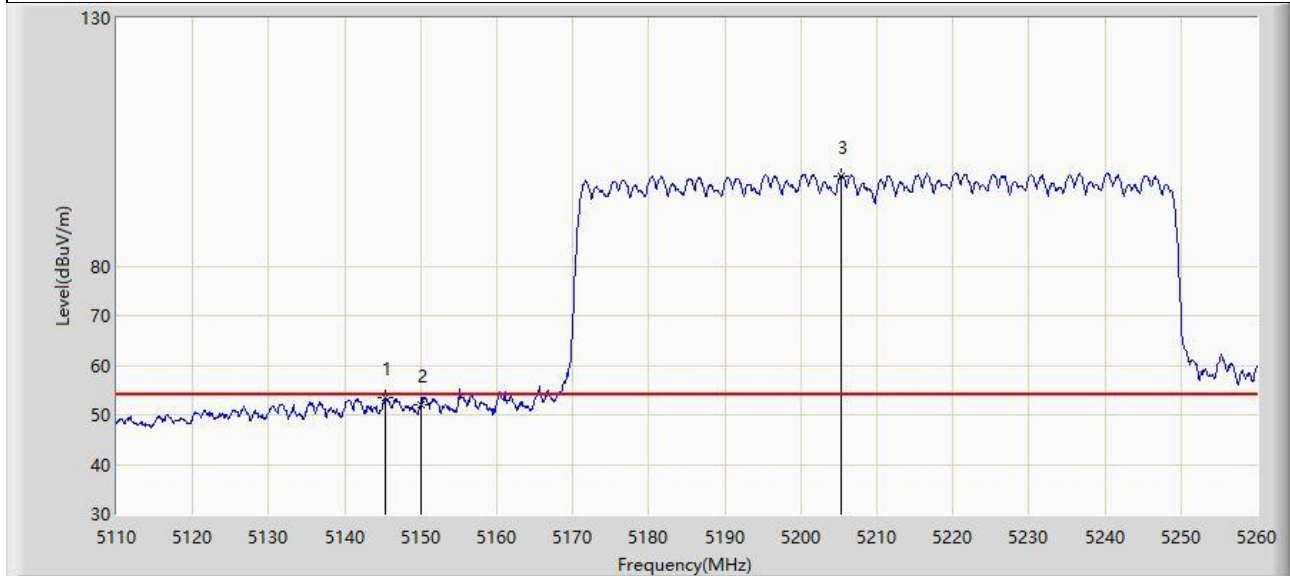


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.400	53.500	49.761	-0.500	54.000	3.739	AV
2		5150.000	51.980	48.200	-2.020	54.000	3.780	AV
3		5205.325	98.212	94.892	N/A	N/A	3.320	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290 MHz	

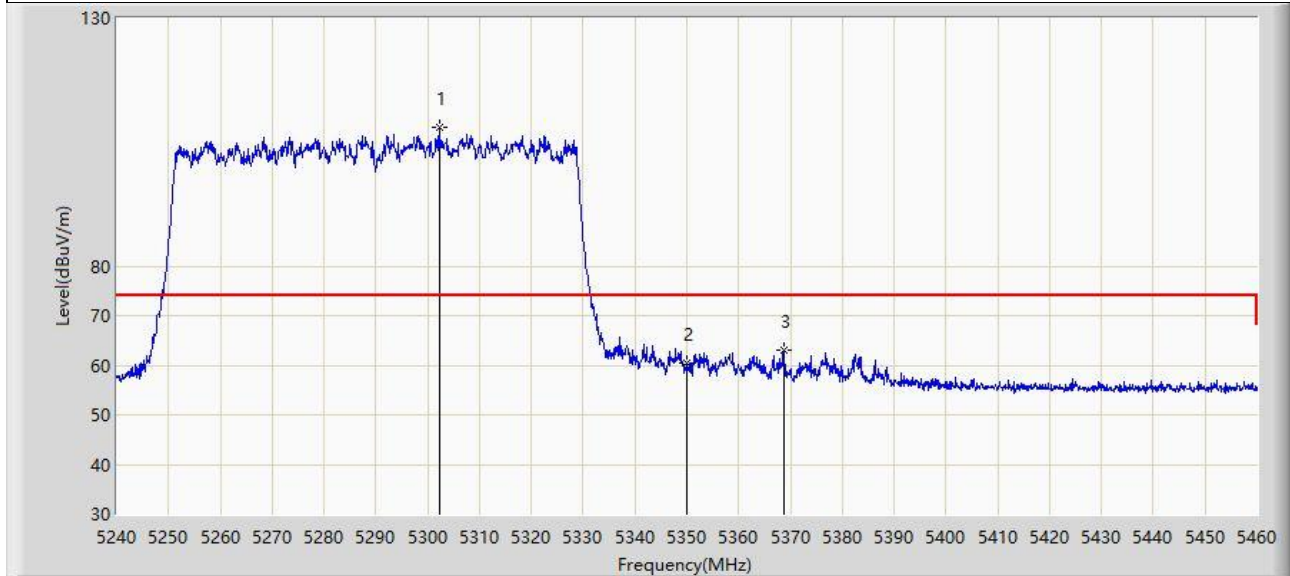


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5302.260	107.913	104.547	N/A	N/A	3.366	PK
2		5350.000	60.544	57.221	-13.456	74.000	3.323	PK
3	*	5368.700	62.985	59.767	-11.015	74.000	3.217	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290 MHz	

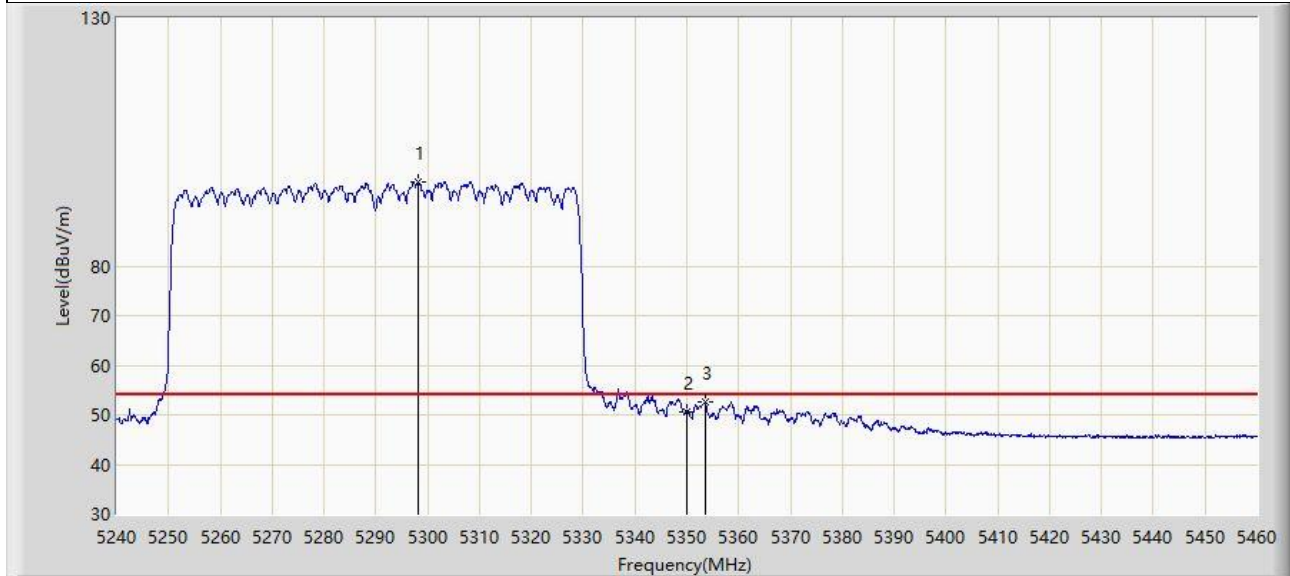


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5298.190	96.947	93.647	N/A	N/A	3.300	AV
2		5350.000	50.489	47.166	-3.511	54.000	3.323	AV
3	*	5353.520	52.621	49.356	-1.379	54.000	3.264	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290 MHz	

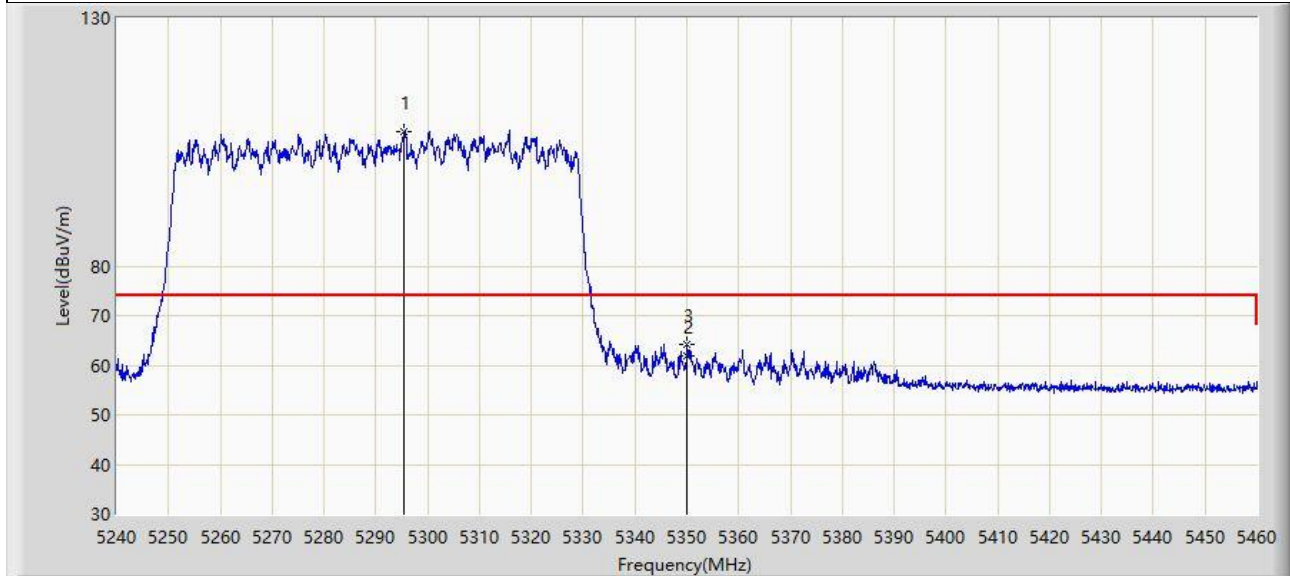


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5295.440	107.222	103.963	N/A	N/A	3.259	PK
2		5350.000	61.887	58.564	-12.113	74.000	3.323	PK
3	*	5350.110	64.320	61.000	-9.680	74.000	3.320	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290 MHz	

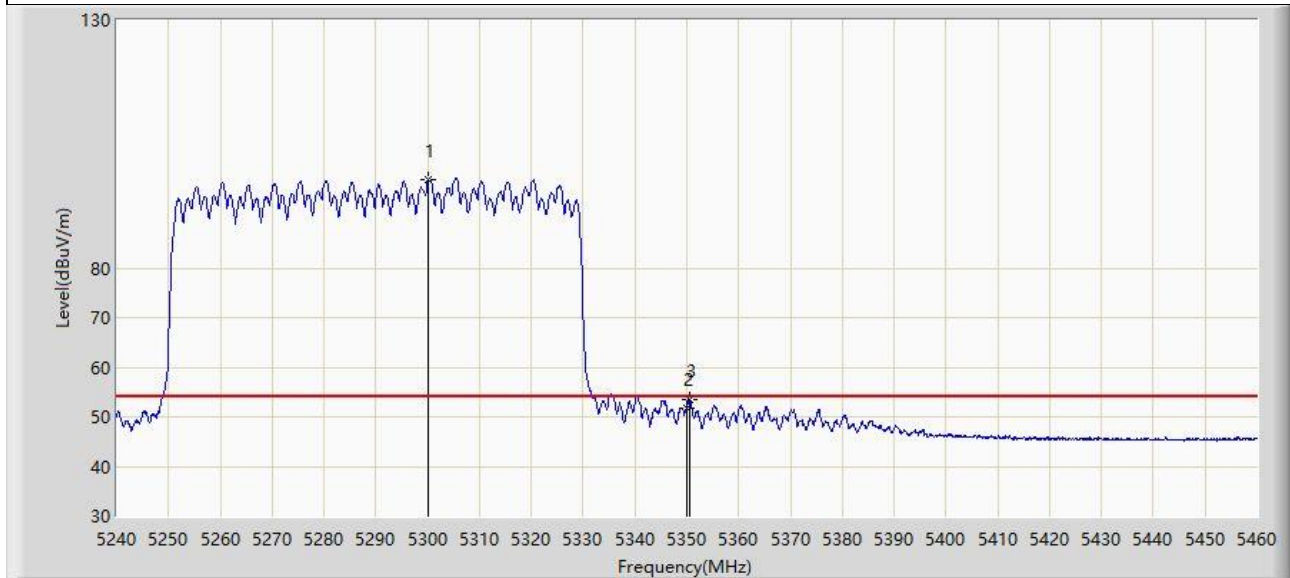


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5300.170	97.921	94.592	N/A	N/A	3.329	AV
2		5350.000	51.844	48.521	-2.156	54.000	3.323	AV
3	*	5350.440	53.477	50.165	-0.523	54.000	3.312	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530 MHz	

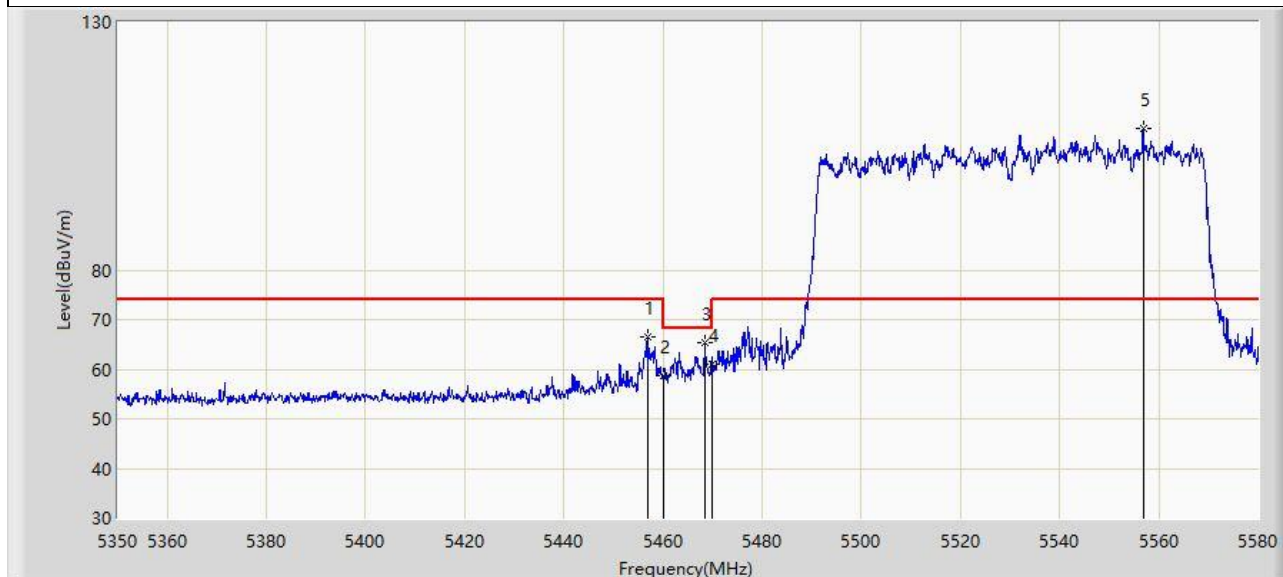


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.835	66.413	62.862	-7.587	74.000	3.551	PK
2		5460.000	58.556	54.946	-15.444	74.000	3.610	PK
3	*	5468.450	65.457	61.688	-2.743	68.200	3.769	PK
4		5470.000	61.145	57.347	-7.055	68.200	3.797	PK
5		5556.885	108.437	104.405	N/A	N/A	4.032	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530 MHz	

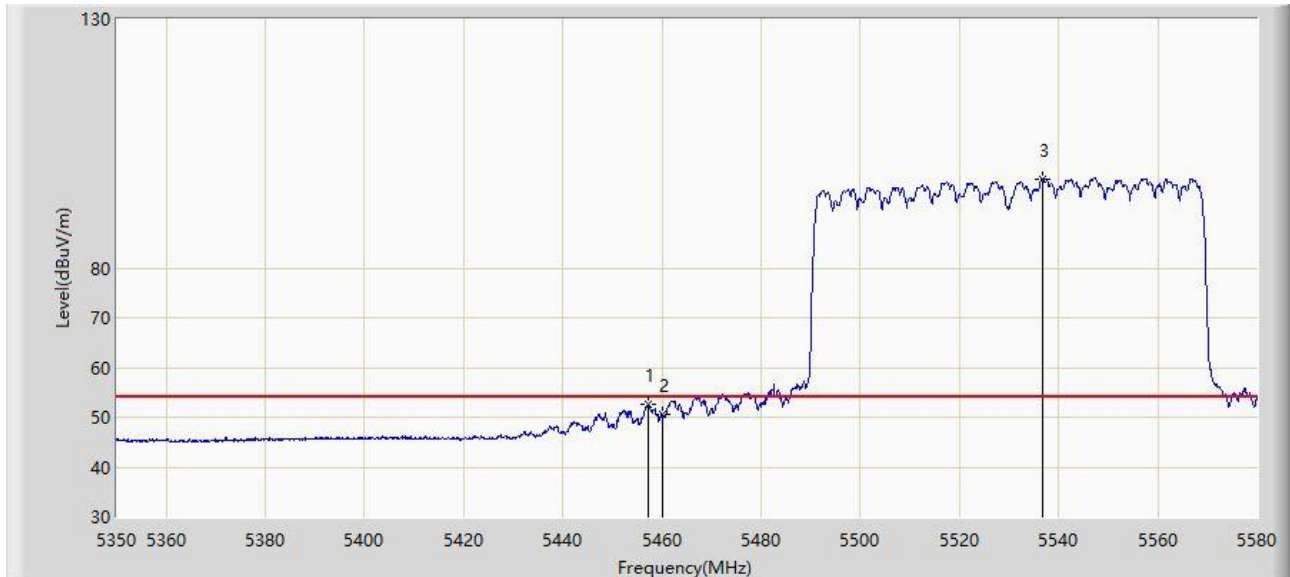


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5457.180	52.466	48.909	-1.534	54.000	3.558	AV
2		5460.000	50.508	46.898	-3.492	54.000	3.610	AV
3		5536.645	97.919	94.218	N/A	N/A	3.700	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530 MHz	

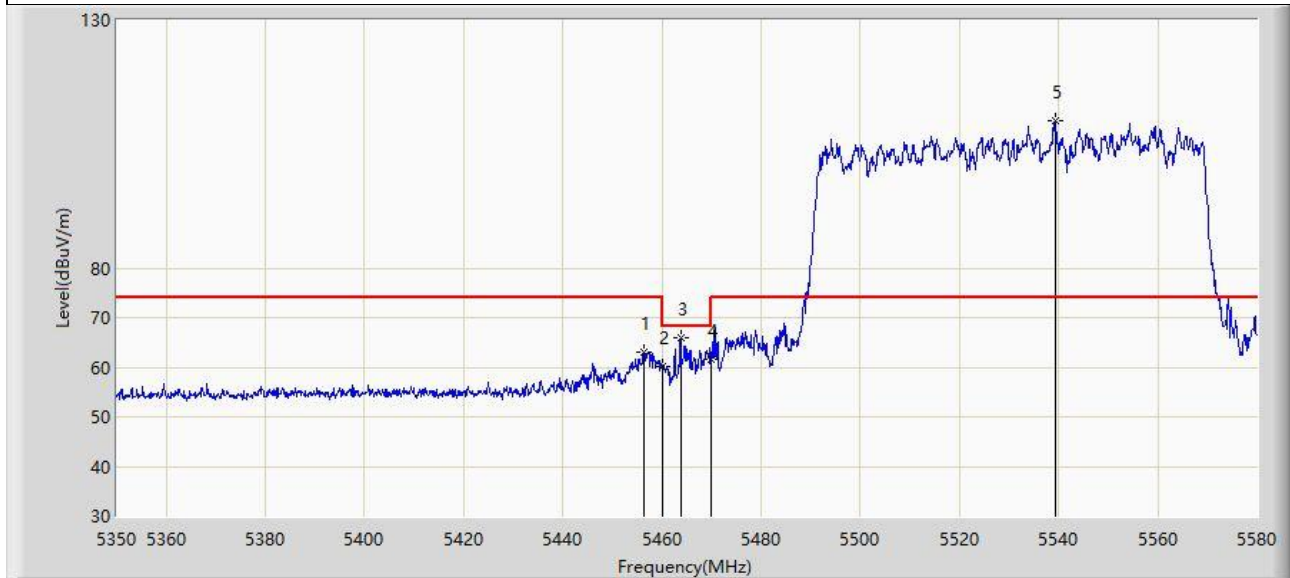


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.260	63.151	59.612	-10.849	74.000	3.539	PK
2		5460.000	60.239	56.629	-13.761	74.000	3.610	PK
3	*	5463.735	66.019	62.339	-2.181	68.200	3.680	PK
4		5470.000	61.711	57.913	-6.489	68.200	3.797	PK
5		5539.290	109.807	106.049	N/A	N/A	3.759	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-22
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530 MHz	

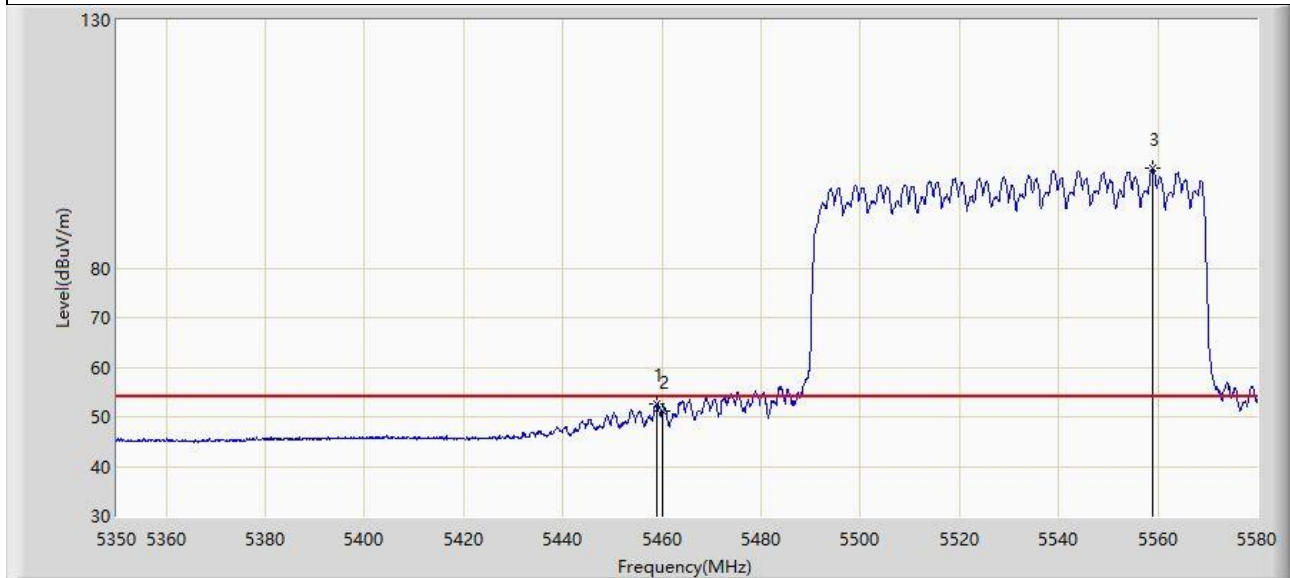


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.020	52.530	48.938	-1.470	54.000	3.592	AV
2		5460.000	51.148	47.538	-2.852	54.000	3.610	AV
3		5558.955	100.072	96.047	N/A	N/A	4.025	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610 MHz	

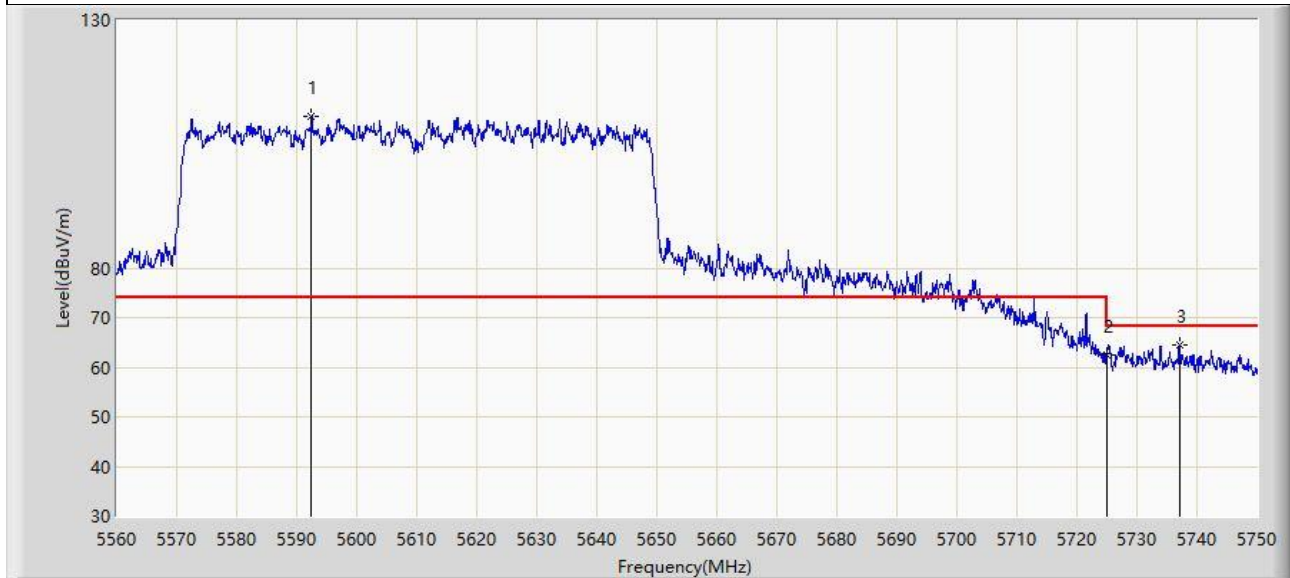


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5592.490	110.697	106.804	N/A	N/A	3.893	PK
2		5725.000	62.340	57.206	-5.860	68.200	5.134	PK
3	*	5737.080	64.455	59.433	-3.745	68.200	5.022	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610 MHz	

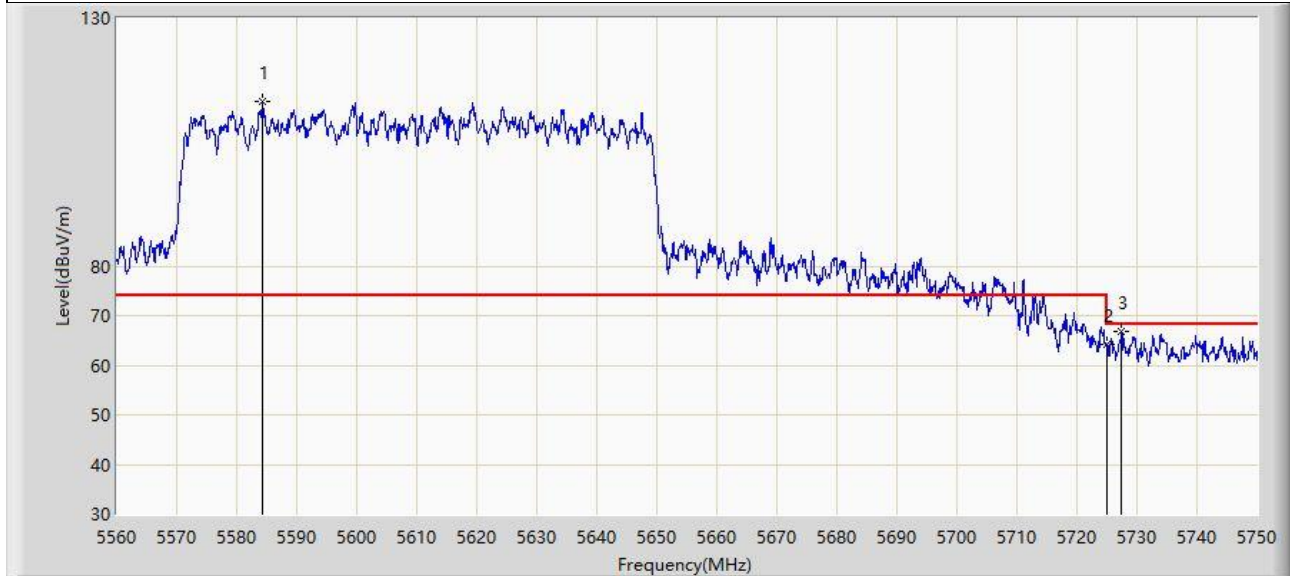


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5584.320	113.163	109.252	N/A	N/A	3.911	PK
2		5725.000	64.100	58.966	-4.100	68.200	5.134	PK
3	*	5727.485	66.817	61.690	-1.383	68.200	5.127	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775 MHz	

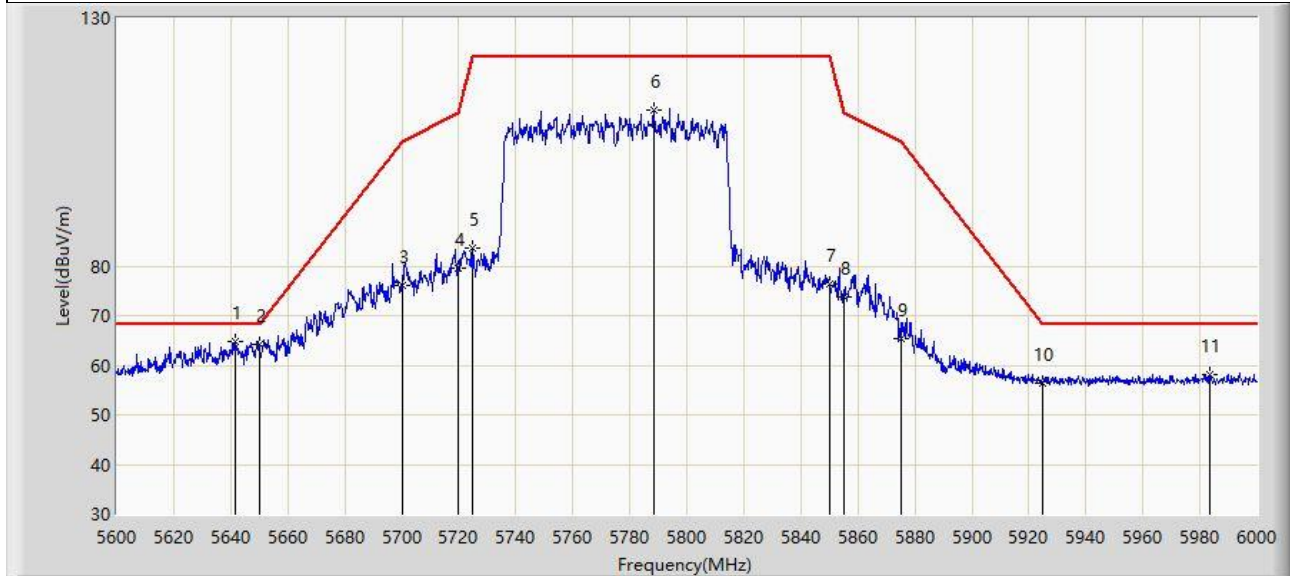


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5641.400	64.754	60.175	-3.446	68.200	4.579	PK
2		5650.000	64.170	59.667	-4.030	68.200	4.502	PK
3		5700.000	75.969	71.106	-29.231	105.200	4.863	PK
4		5720.000	79.681	74.588	-31.119	110.800	5.093	PK
5		5725.000	83.570	78.436	-38.630	122.200	5.134	PK
6		5788.400	111.411	106.052	N/A	N/A	5.359	PK
7		5850.000	76.518	71.106	-45.682	122.200	5.412	PK
8		5855.000	73.759	68.299	-37.041	110.800	5.460	PK
9		5875.000	65.460	59.951	-39.740	105.200	5.509	PK
10		5925.000	56.483	50.974	-11.717	68.200	5.509	PK
11		5983.400	58.157	52.562	-10.043	68.200	5.595	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775 MHz	

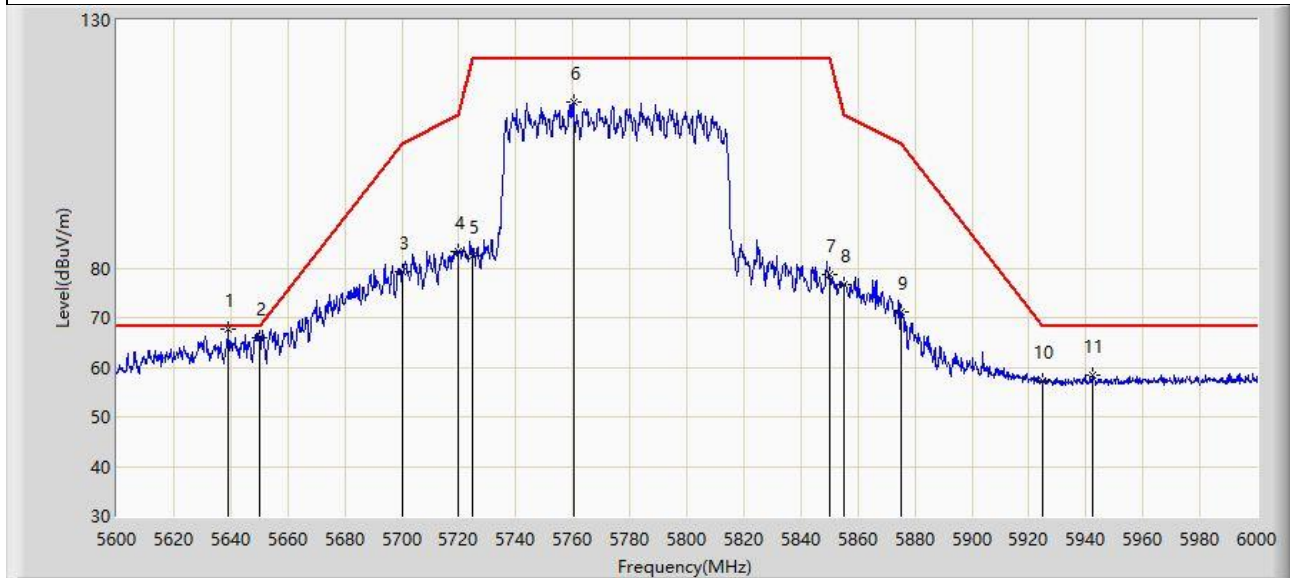


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5639.200	67.599	63.034	-0.601	68.200	4.566	PK
2		5650.000	66.075	61.572	-2.125	68.200	4.502	PK
3		5700.000	79.364	74.501	-25.836	105.200	4.863	PK
4		5720.000	83.305	78.212	-27.495	110.800	5.093	PK
5		5725.000	82.333	77.199	-39.867	122.200	5.134	PK
6		5760.200	113.470	108.438	N/A	N/A	5.032	PK
7		5850.000	78.588	73.176	-43.612	122.200	5.412	PK
8		5855.000	76.790	71.330	-34.010	110.800	5.460	PK
9		5875.000	71.056	65.547	-34.144	105.200	5.509	PK
10		5925.000	57.289	51.780	-10.911	68.200	5.509	PK
11		5942.200	58.513	52.943	-9.687	68.200	5.570	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250 MHz	

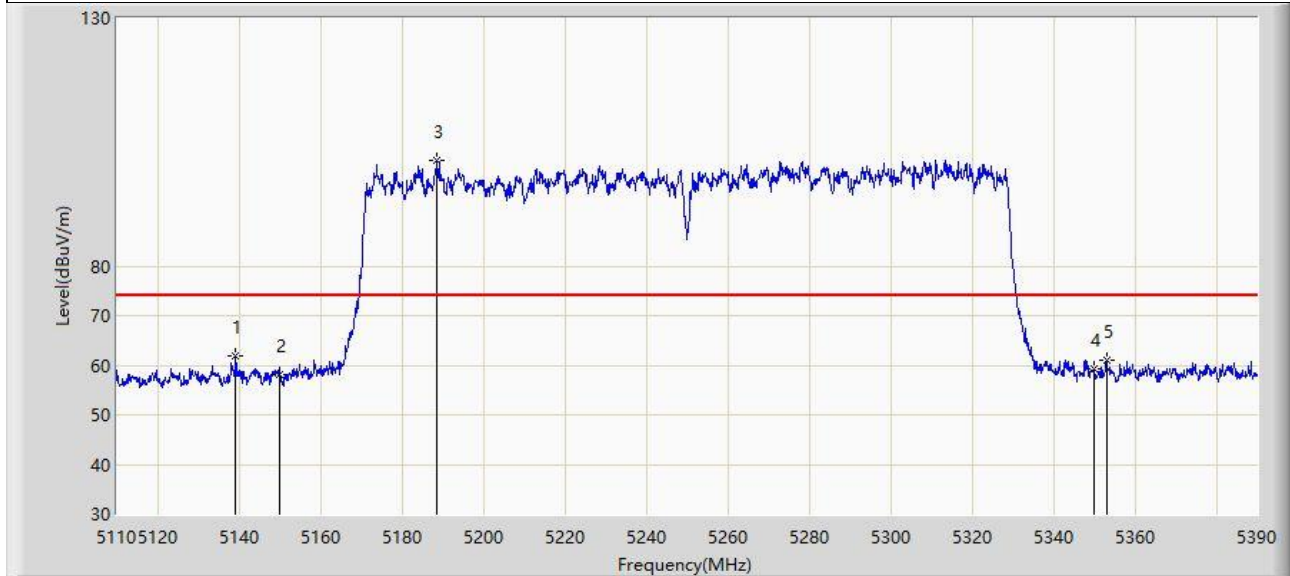


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5139.260	61.761	58.103	-12.239	74.000	3.657	PK
2		5150.000	57.984	54.204	-16.016	74.000	3.780	PK
3		5188.680	101.351	97.844	N/A	N/A	3.507	PK
4		5350.000	59.147	55.824	-14.853	74.000	3.323	PK
5		5353.040	61.141	57.874	-12.859	74.000	3.267	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250 MHz	

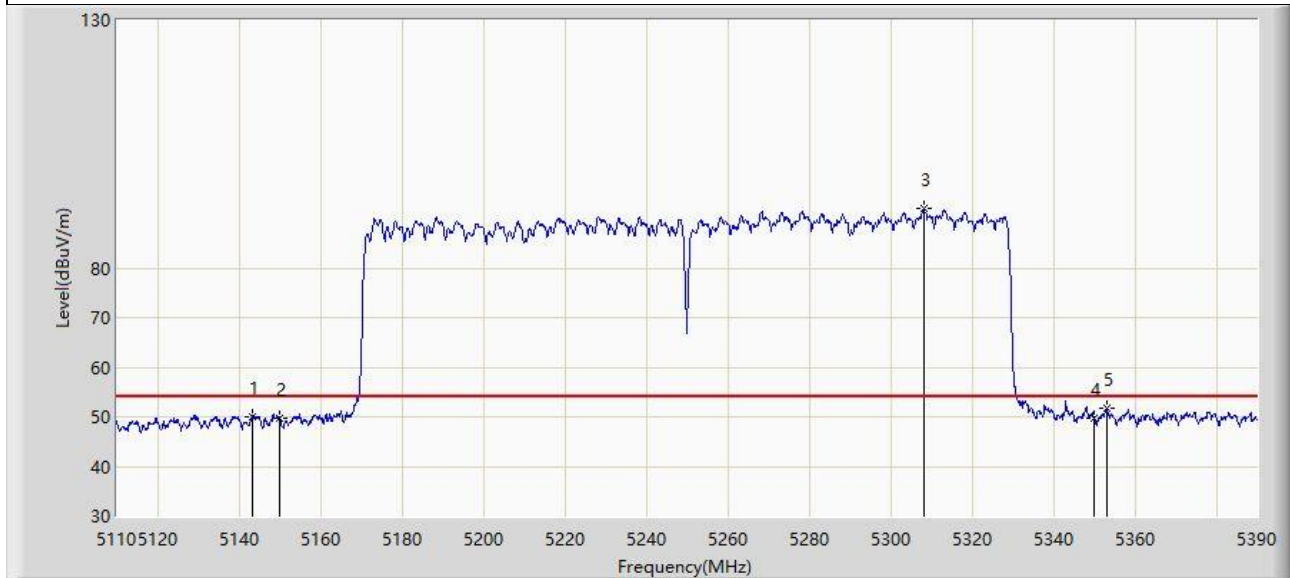


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5143.460	50.077	46.364	-3.923	54.000	3.713	AV
2		5150.000	49.826	46.046	-4.174	54.000	3.780	AV
3		5308.240	92.076	88.594	N/A	N/A	3.483	AV
4		5350.000	49.784	46.461	-4.216	54.000	3.323	AV
5	*	5353.320	51.681	48.415	-2.319	54.000	3.265	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250 MHz	

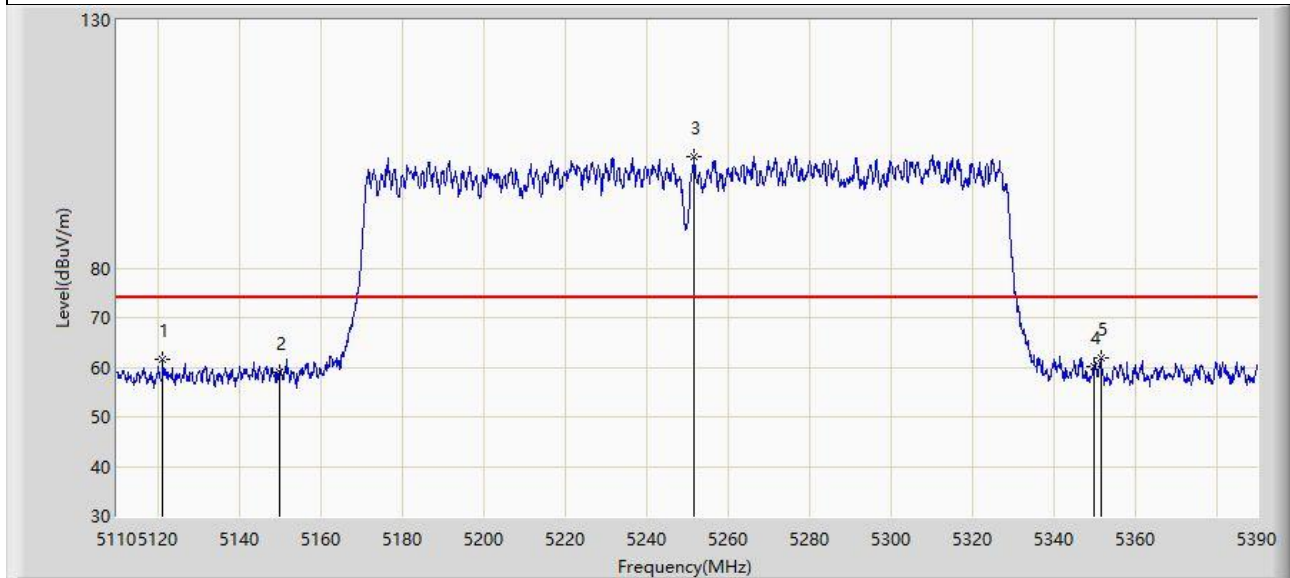


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5121.340	61.691	58.162	-12.309	74.000	3.529	PK
2		5150.000	59.066	55.286	-14.934	74.000	3.780	PK
3		5251.680	102.348	98.980	N/A	N/A	3.368	PK
4		5350.000	60.276	56.953	-13.724	74.000	3.323	PK
5	*	5351.640	61.769	58.488	-12.231	74.000	3.281	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250 MHz	

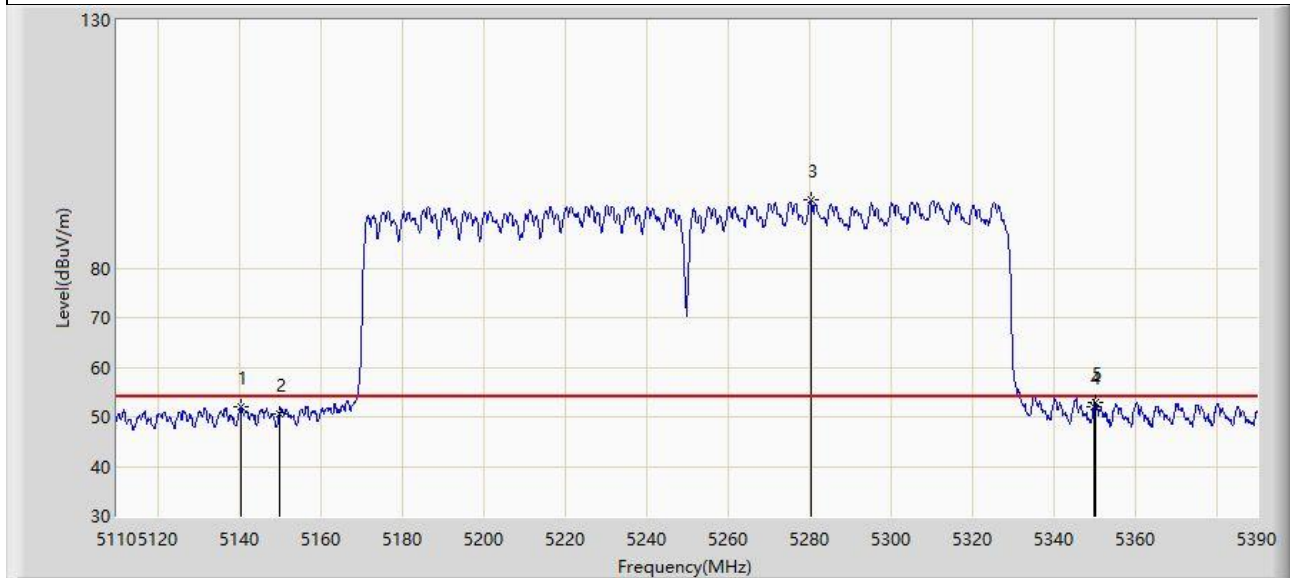


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5140.520	52.074	48.399	-1.926	54.000	3.674	AV
2		5150.000	50.677	46.897	-3.323	54.000	3.780	AV
3		5280.520	93.666	90.602	N/A	N/A	3.064	AV
4		5350.000	51.951	48.628	-2.049	54.000	3.323	AV
5	*	5350.520	52.767	49.457	-1.233	54.000	3.310	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570 MHz	

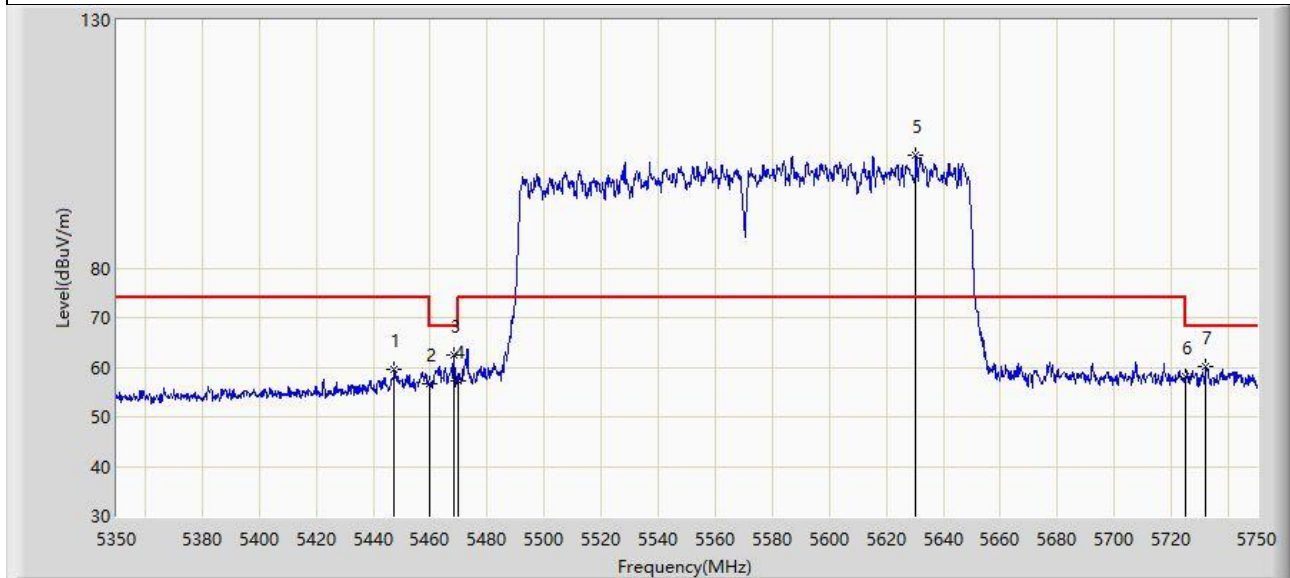


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5447.400	59.490	55.978	-14.510	74.000	3.512	PK
2		5460.000	56.589	52.979	-17.411	74.000	3.610	PK
3	*	5468.400	62.491	58.723	-5.709	68.200	3.769	PK
4		5470.000	57.388	53.590	-10.812	68.200	3.797	PK
5		5630.400	102.712	98.229	N/A	N/A	4.483	PK
6		5725.000	58.235	53.101	-9.965	68.200	5.134	PK
7		5732.000	60.025	54.947	-8.175	68.200	5.077	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570 MHz	

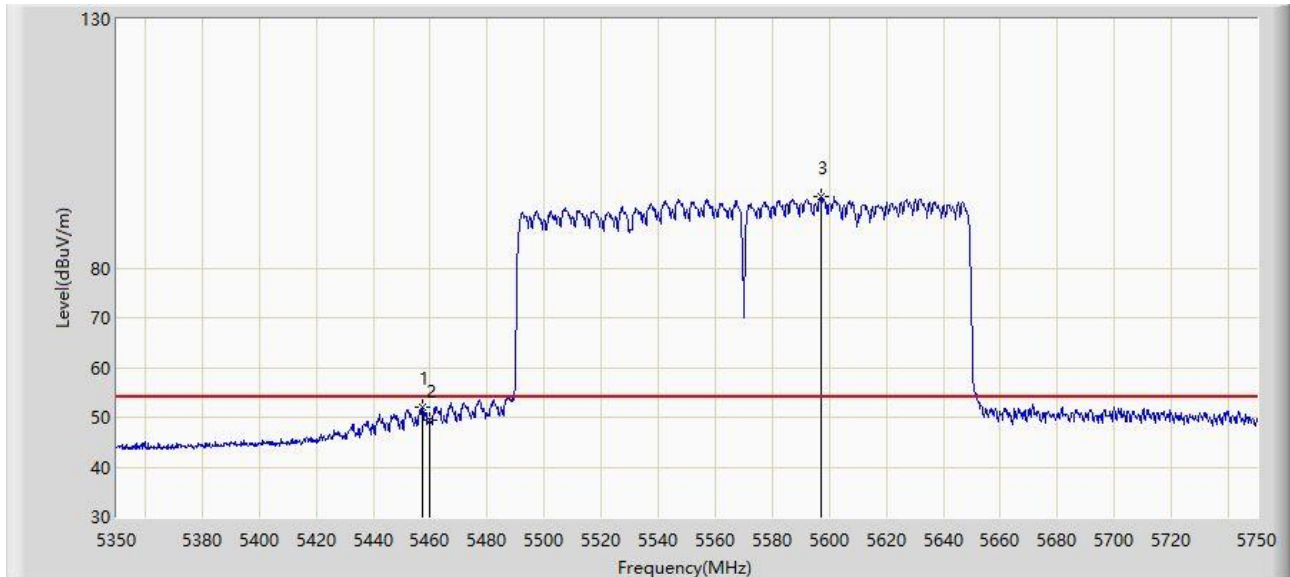


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5457.200	52.077	48.519	-1.923	54.000	3.558	AV
2		5460.000	49.494	45.884	-4.506	54.000	3.610	AV
3		5597.200	94.270	90.342	N/A	N/A	3.927	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570 MHz	

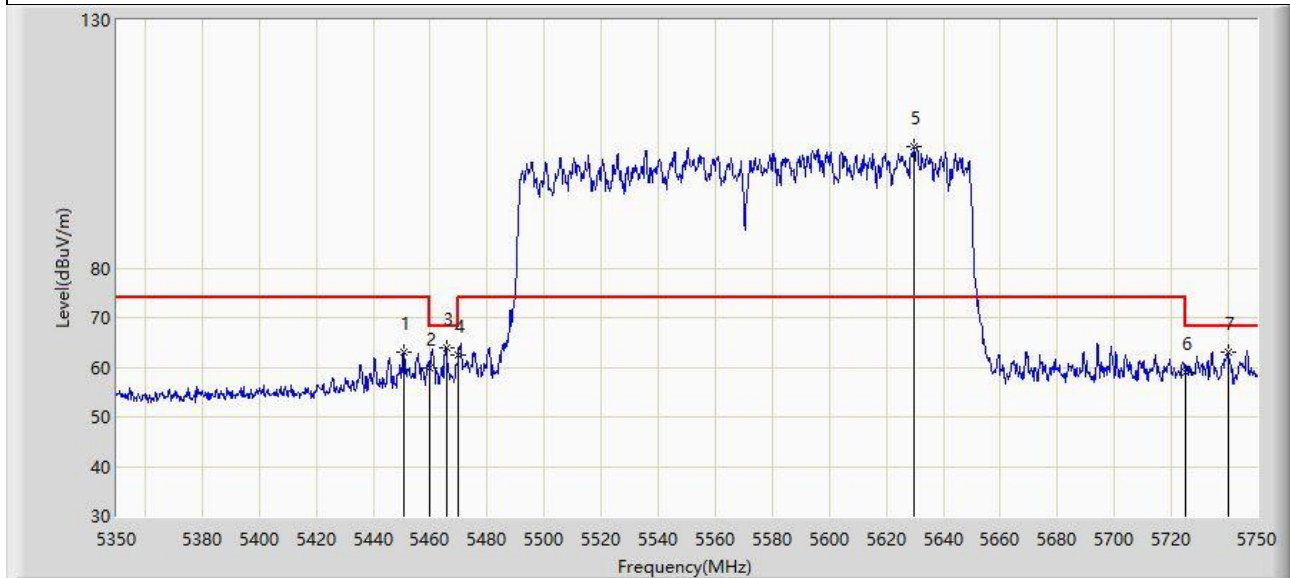


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5450.600	62.899	59.396	-11.101	74.000	3.503	PK
2		5460.000	59.945	56.335	-14.055	74.000	3.610	PK
3	*	5465.600	63.904	60.189	-4.296	68.200	3.715	PK
4		5470.000	62.511	58.713	-5.689	68.200	3.797	PK
5		5629.600	104.484	100.009	N/A	N/A	4.475	PK
6		5725.000	58.921	53.787	-9.279	68.200	5.134	PK
7		5739.800	62.938	57.946	-5.262	68.200	4.992	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570 MHz	

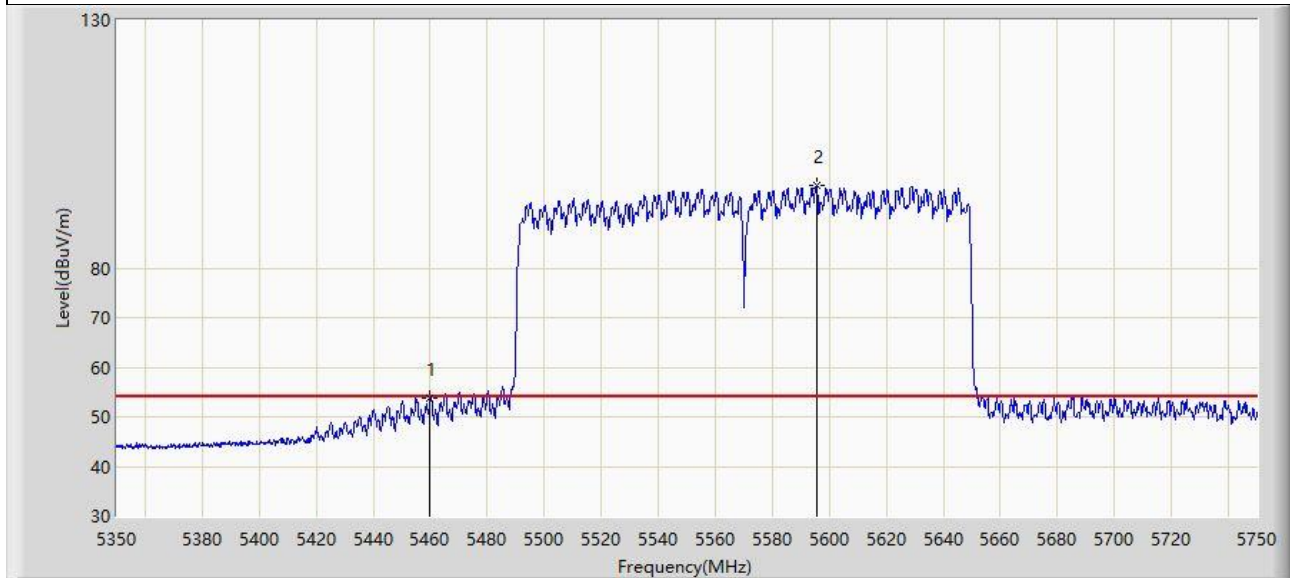

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	53.705	50.095	-0.295	54.000	3.610	AV
2		5595.400	96.577	92.662	N/A	N/A	3.915	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180 MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.925	72.241	68.465	-1.759	74.000	3.776	PK
2		5150.000	65.200	61.420	-8.800	74.000	3.780	PK
3		5178.220	115.316	111.624	N/A	N/A	3.692	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180 MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.870	52.575	48.796	-1.425	54.000	3.780	AV
2		5150.000	52.424	48.644	-1.576	54.000	3.780	AV
3		5178.355	105.464	101.774	N/A	N/A	3.690	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180 MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	69.311	65.531	-4.689	74.000	3.780	PK
2		5181.415	115.578	111.935	N/A	N/A	3.642	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	53.469	49.689	-0.531	54.000	3.780	AV
2		5175.385	106.614	102.878	N/A	N/A	3.736	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320 MHz	

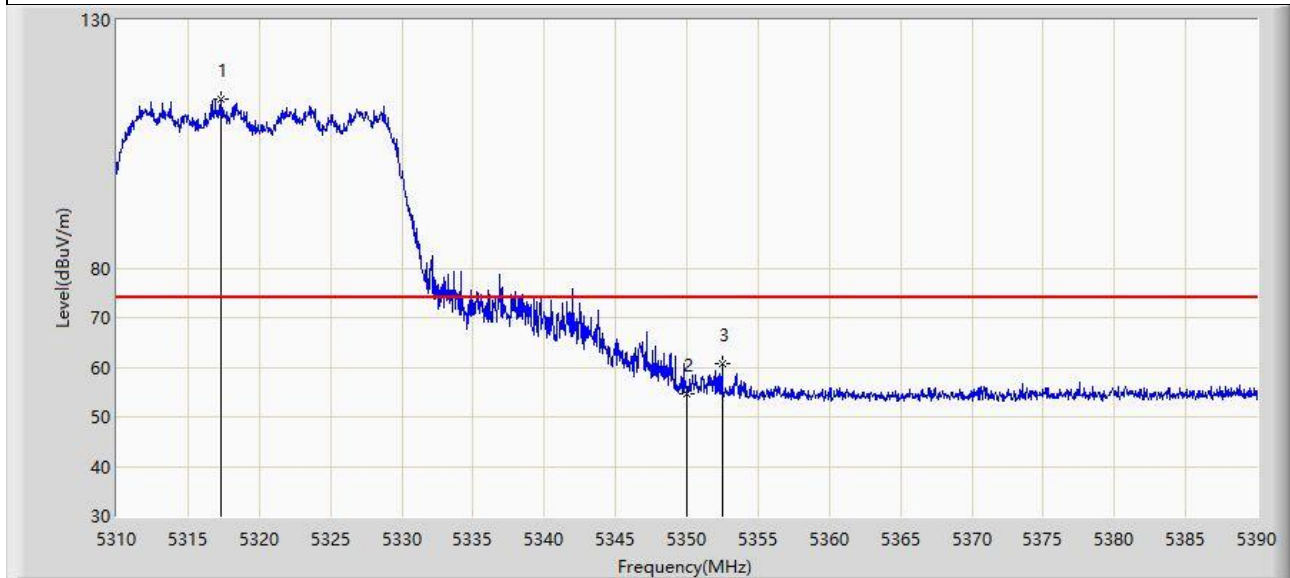


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.360	114.156	110.473	N/A	N/A	3.682	PK
2		5350.000	54.516	51.193	-19.484	74.000	3.323	PK
3	*	5352.480	60.608	57.339	-13.392	74.000	3.269	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320 MHz	

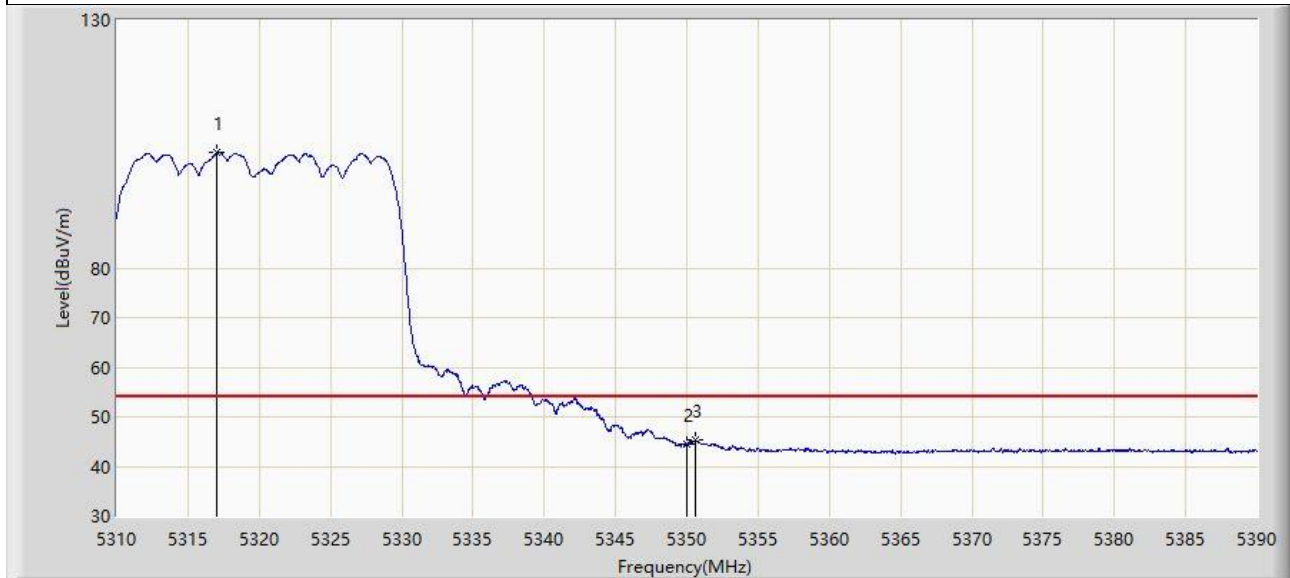

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.000	103.235	99.561	N/A	N/A	3.674	AV
2		5350.000	44.475	41.152	-9.525	54.000	3.323	AV
3	*	5350.560	45.280	41.971	-8.720	54.000	3.309	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5315.360	117.740	114.107	N/A	N/A	3.632	PK
2		5350.000	64.948	61.625	-9.052	74.000	3.323	PK
3	*	5350.240	66.701	63.384	-7.299	74.000	3.317	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320 MHz	

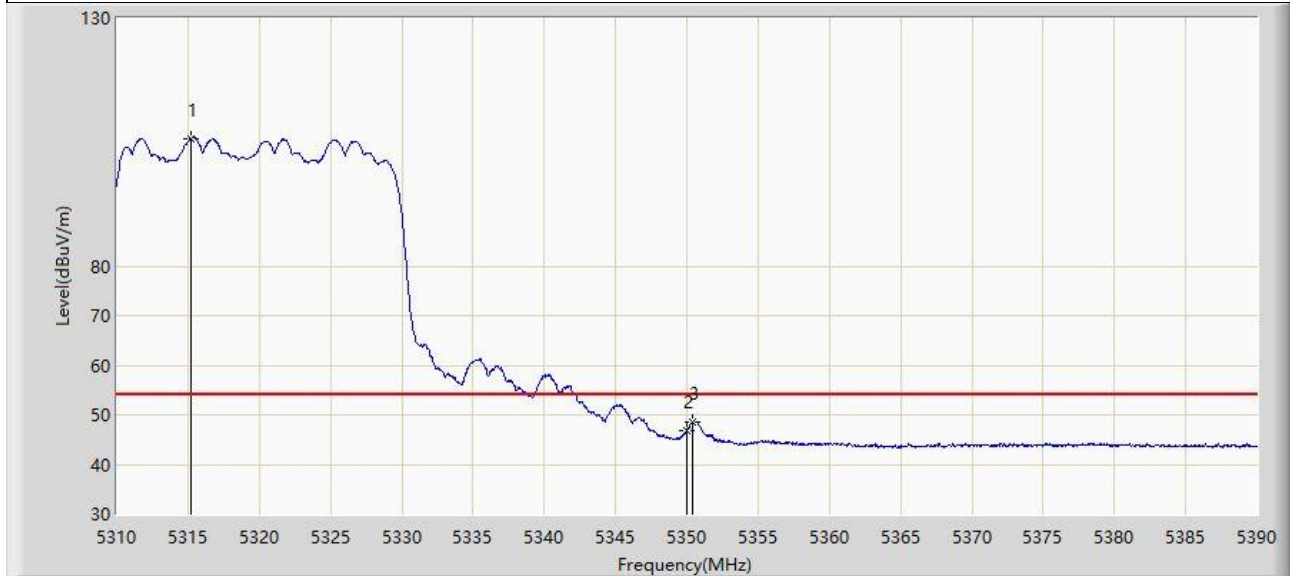

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5315.240	105.718	102.088	N/A	N/A	3.629	AV
2		5350.000	46.768	43.445	-7.232	54.000	3.323	AV
3	*	5350.440	48.501	45.189	-5.499	54.000	3.312	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500 MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.990	61.868	58.295	-12.132	74.000	3.573	PK
2		5460.000	56.664	53.054	-17.336	74.000	3.610	PK
3	*	5468.745	66.538	62.764	-1.662	68.200	3.774	PK
4		5470.000	61.859	58.061	-6.341	68.200	3.797	PK
5		5497.230	115.412	111.755	N/A	N/A	3.657	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5457.630	44.588	41.022	-9.412	54.000	3.566	AV
2		5460.000	44.095	40.485	-9.905	54.000	3.610	AV
3		5497.275	104.081	100.425	N/A	N/A	3.656	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500 MHz	

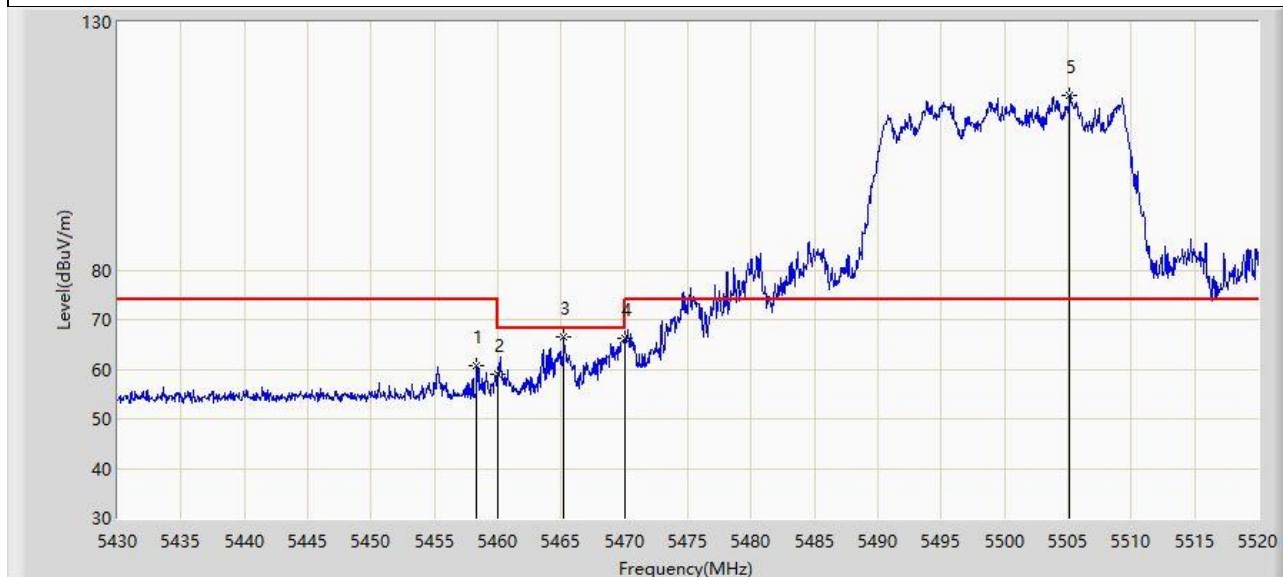

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.350	60.656	57.077	-13.344	74.000	3.579	PK
2		5460.000	59.073	55.463	-14.927	74.000	3.610	PK
3	*	5465.235	66.655	62.946	-1.545	68.200	3.709	PK
4		5470.000	66.224	62.426	-1.976	68.200	3.797	PK
5		5505.150	115.310	111.750	N/A	N/A	3.560	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.700	45.952	42.347	-8.048	54.000	3.605	AV
2		5460.000	45.922	42.312	-8.078	54.000	3.610	AV
3		5503.935	106.288	102.713	N/A	N/A	3.576	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5700 MHz	

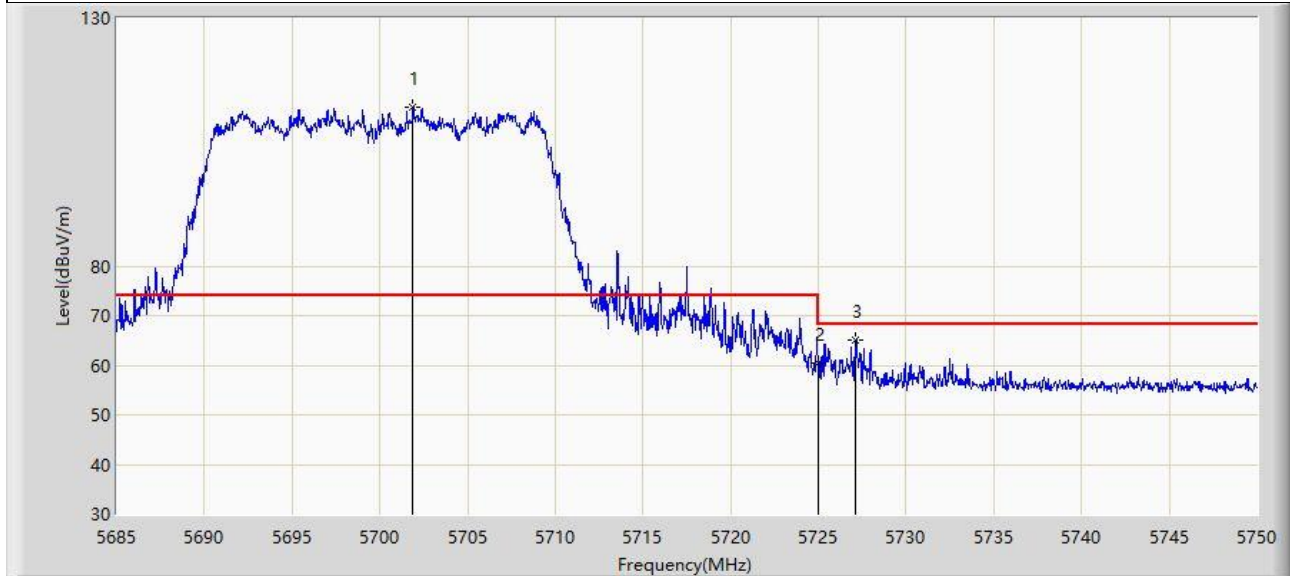


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5701.900	112.150	107.259	N/A	N/A	4.891	PK
2		5725.000	60.558	55.424	-7.642	68.200	5.134	PK
3	*	5727.152	65.183	60.052	-3.017	68.200	5.130	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5700 MHz	

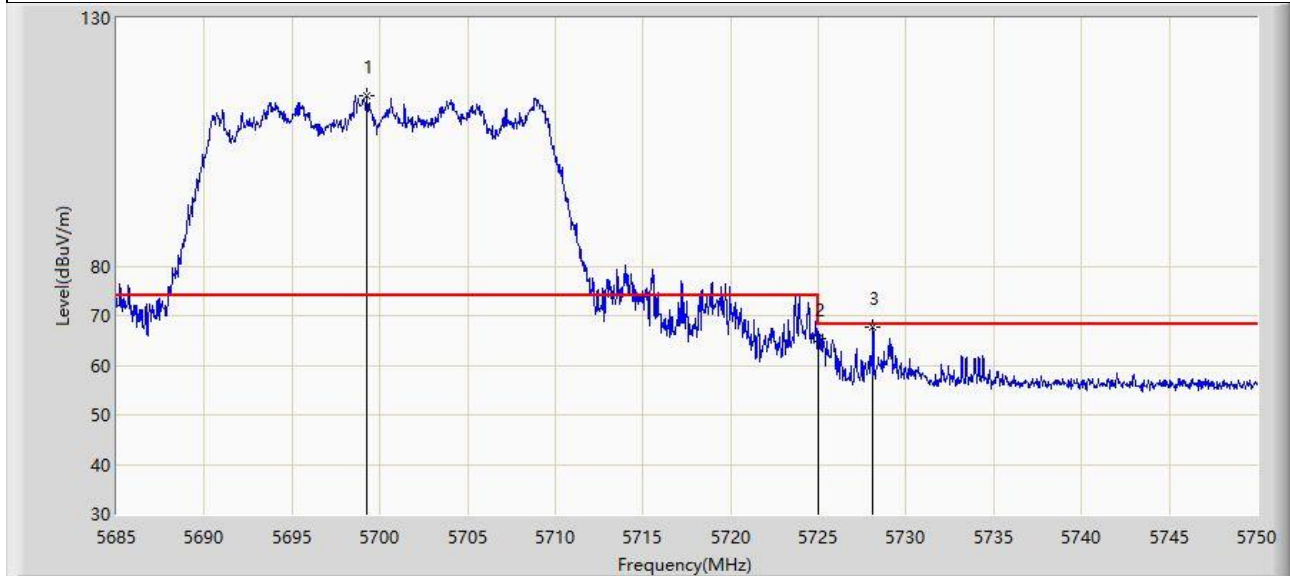


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5699.235	114.380	109.529	N/A	N/A	4.851	PK
2		5725.000	65.431	60.297	-2.769	68.200	5.134	PK
3	*	5728.127	67.649	62.529	-0.551	68.200	5.120	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5745 MHz	

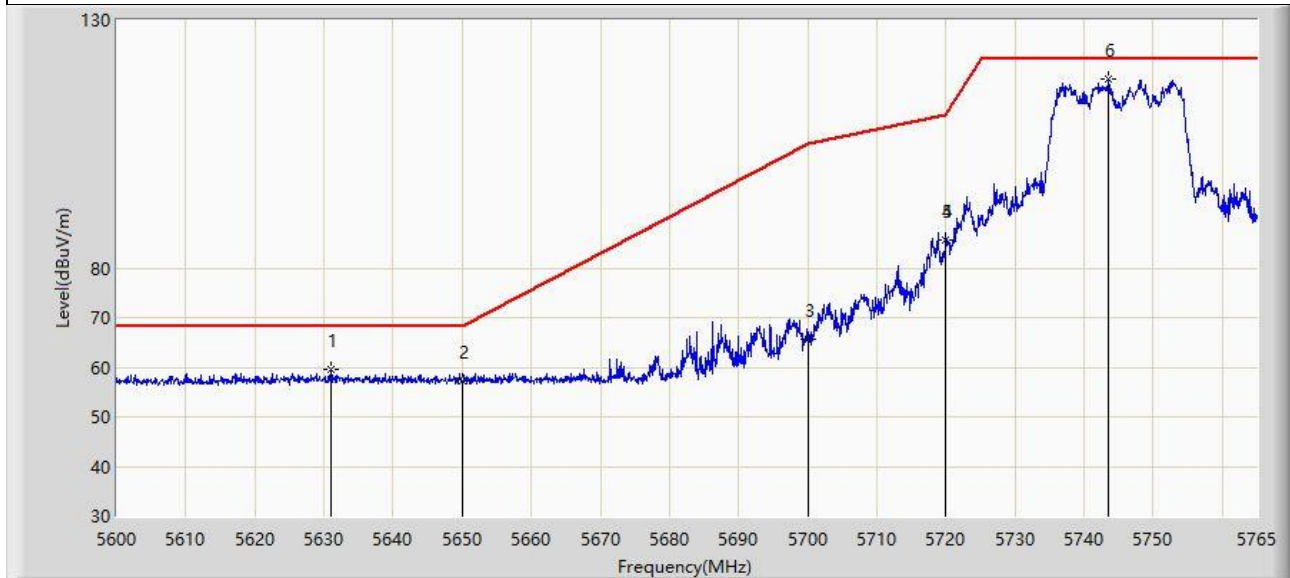


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5630.937	59.652	55.164	-8.548	68.200	4.487	PK
2		5650.000	57.257	52.754	-10.943	68.200	4.502	PK
3		5700.000	65.580	60.717	-39.620	105.200	4.863	PK
4		5720.000	85.701	80.608	-25.099	110.800	5.093	PK
5		5720.000	85.701	80.608	-25.099	110.800	5.093	PK
6		5743.550	118.009	113.048	N/A	N/A	4.961	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5745 MHz	

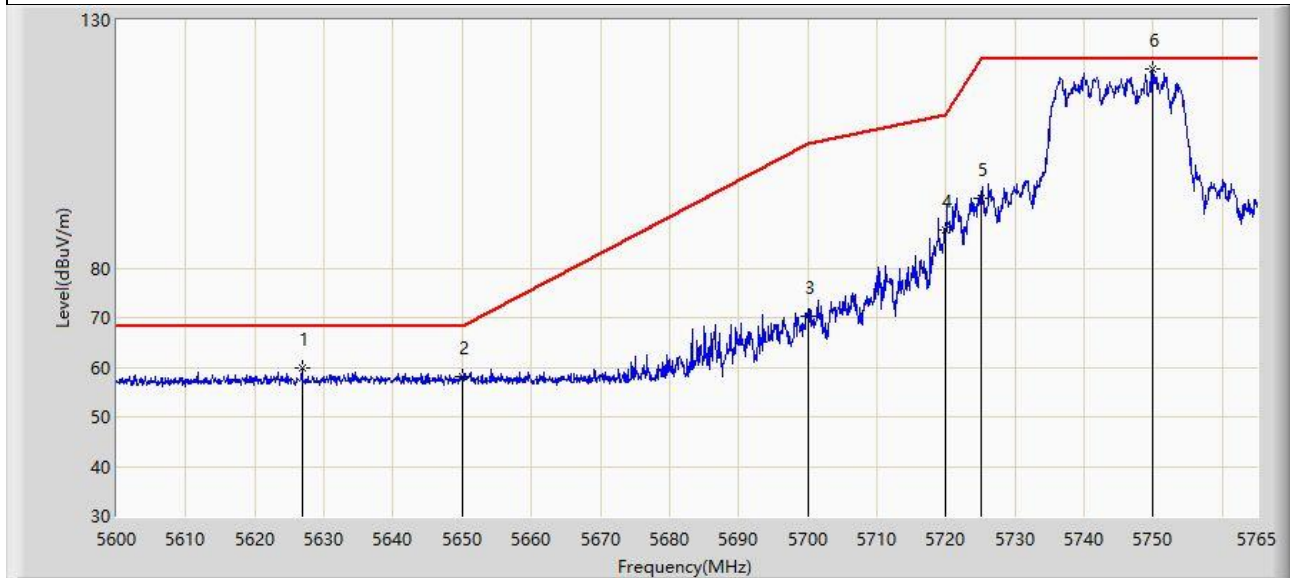


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5626.812	59.877	55.428	-8.323	68.200	4.448	PK
2		5650.000	58.016	53.513	-10.184	68.200	4.502	PK
3		5700.000	70.196	65.333	-35.004	105.200	4.863	PK
4		5720.000	87.742	82.649	-23.058	110.800	5.093	PK
5		5725.000	94.148	89.014	-28.052	122.200	5.134	PK
6		5749.985	120.098	115.108	N/A	N/A	4.990	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5825 MHz	

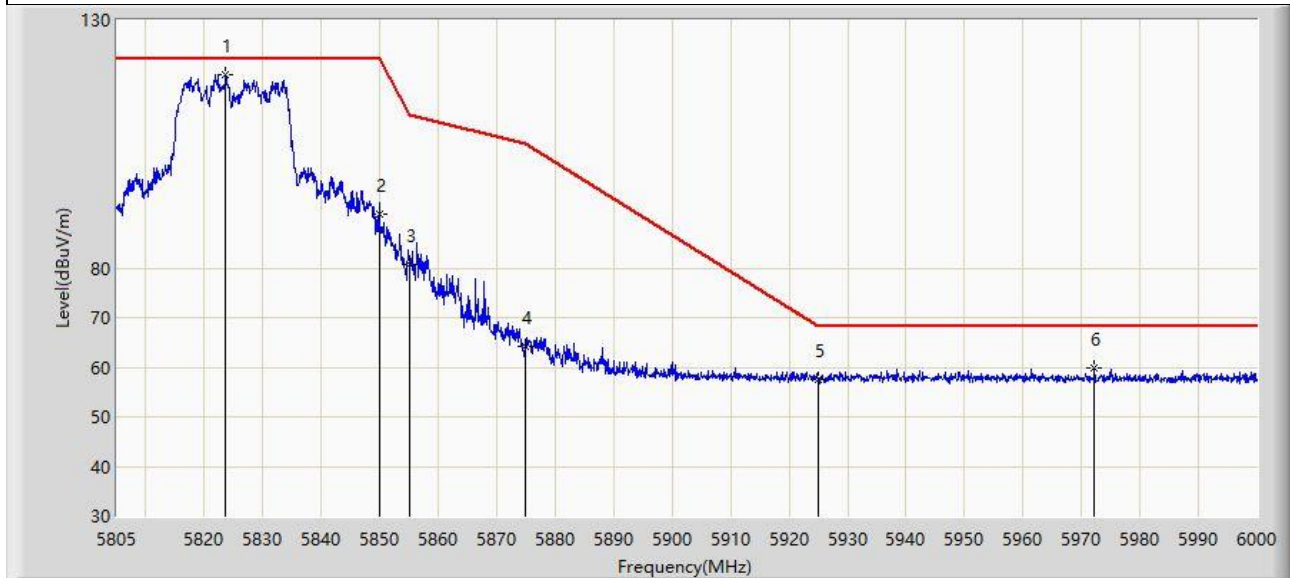


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5823.623	118.875	113.578	N/A	N/A	5.297	PK
2		5850.000	90.903	85.491	-31.297	122.200	5.412	PK
3		5855.000	80.692	75.232	-30.108	110.800	5.460	PK
4		5875.000	64.310	58.801	-40.890	105.200	5.509	PK
5		5925.000	57.615	52.106	-10.585	68.200	5.509	PK
6	*	5972.212	59.777	54.181	-8.423	68.200	5.596	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT20 at 5825 MHz	

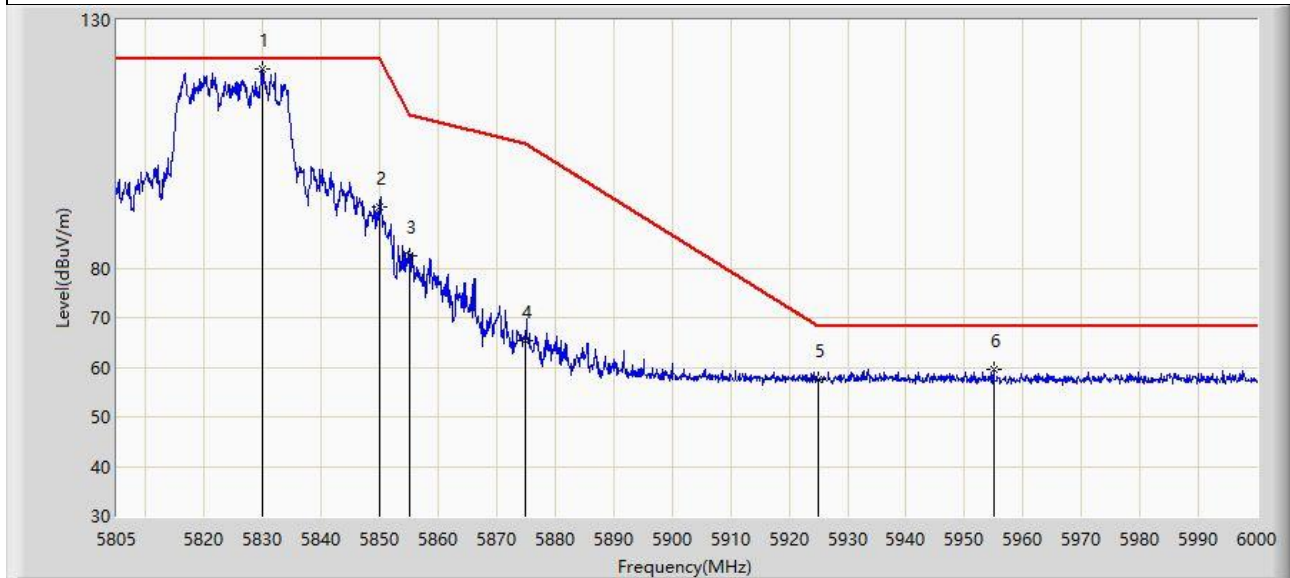


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5829.960	120.131	114.848	N/A	N/A	5.283	PK
2		5850.000	92.200	86.788	-30.000	122.200	5.412	PK
3		5855.000	82.527	77.067	-28.273	110.800	5.460	PK
4		5875.000	65.300	59.791	-39.900	105.200	5.509	PK
5		5925.000	57.455	51.946	-10.745	68.200	5.509	PK
6	*	5954.955	59.484	53.896	-8.716	68.200	5.588	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190 MHz	

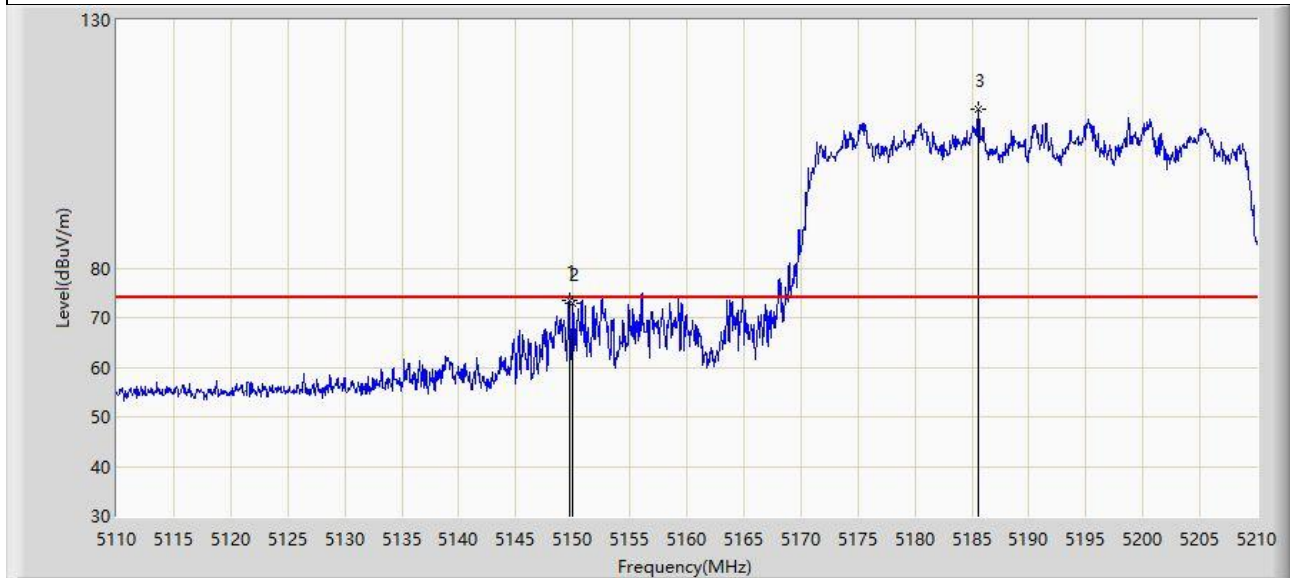


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.700	73.364	69.585	-0.636	74.000	3.779	PK
2		5150.000	72.856	69.076	-1.144	74.000	3.780	PK
3		5185.550	112.105	108.537	N/A	N/A	3.568	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190 MHz	

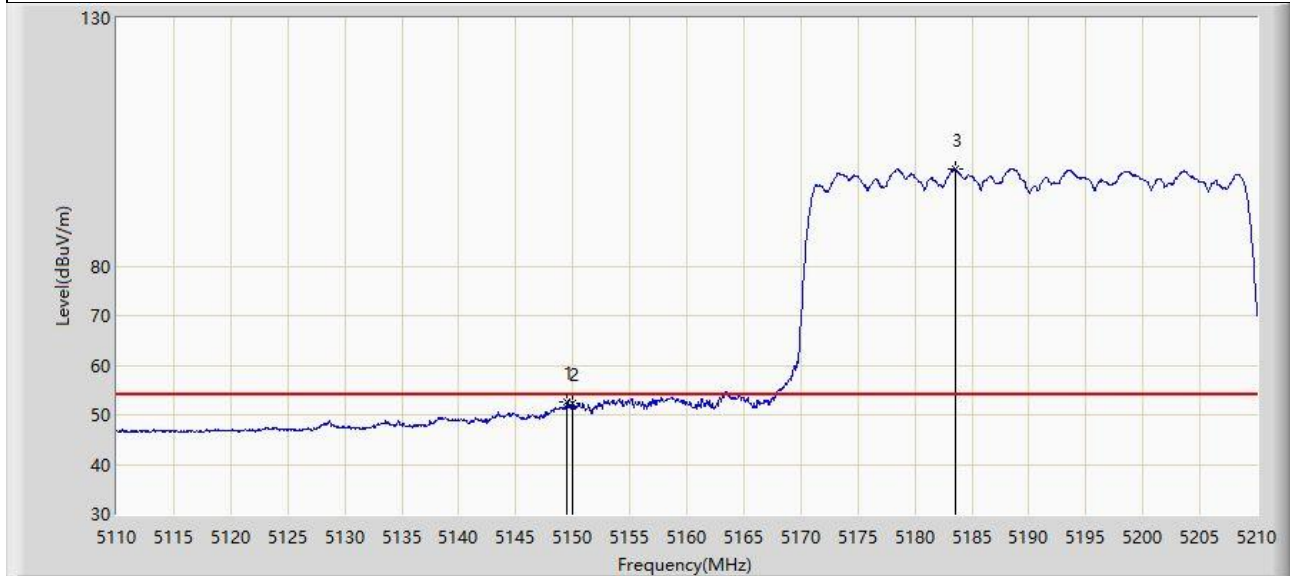


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.500	52.625	48.847	-1.375	54.000	3.778	AV
2		5150.000	52.237	48.457	-1.763	54.000	3.780	AV
3		5183.500	99.487	95.881	N/A	N/A	3.606	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190 MHz	

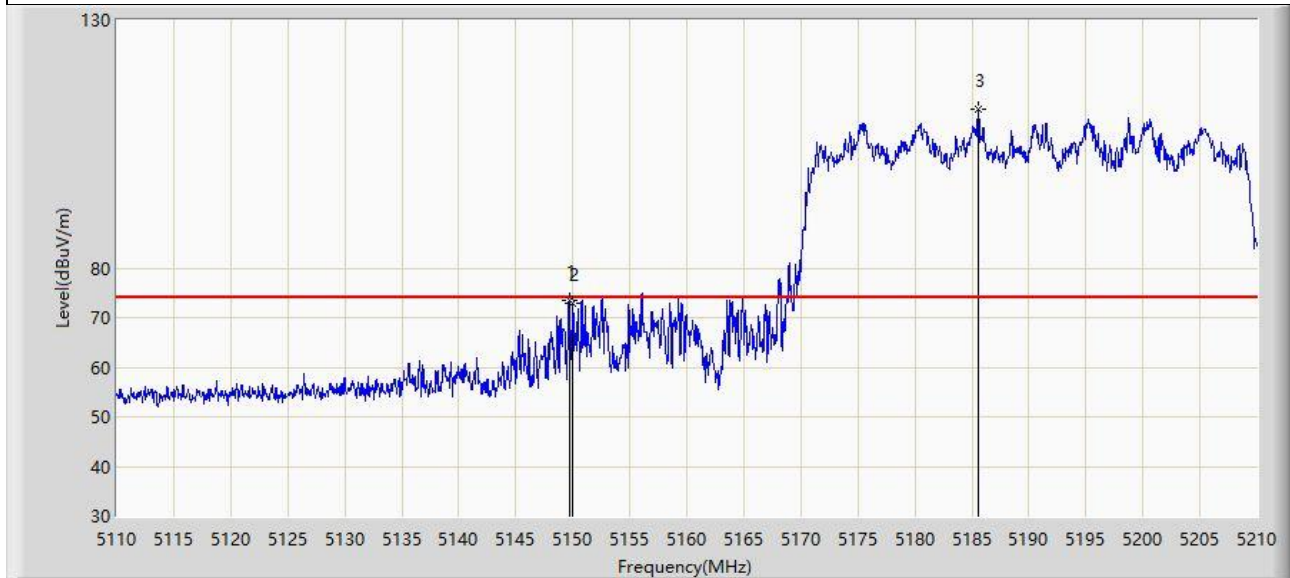


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.700	73.364	69.585	-0.636	74.000	3.779	PK
2		5150.000	72.856	69.076	-1.144	74.000	3.780	PK
3		5185.550	112.105	108.537	N/A	N/A	3.568	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190 MHz	

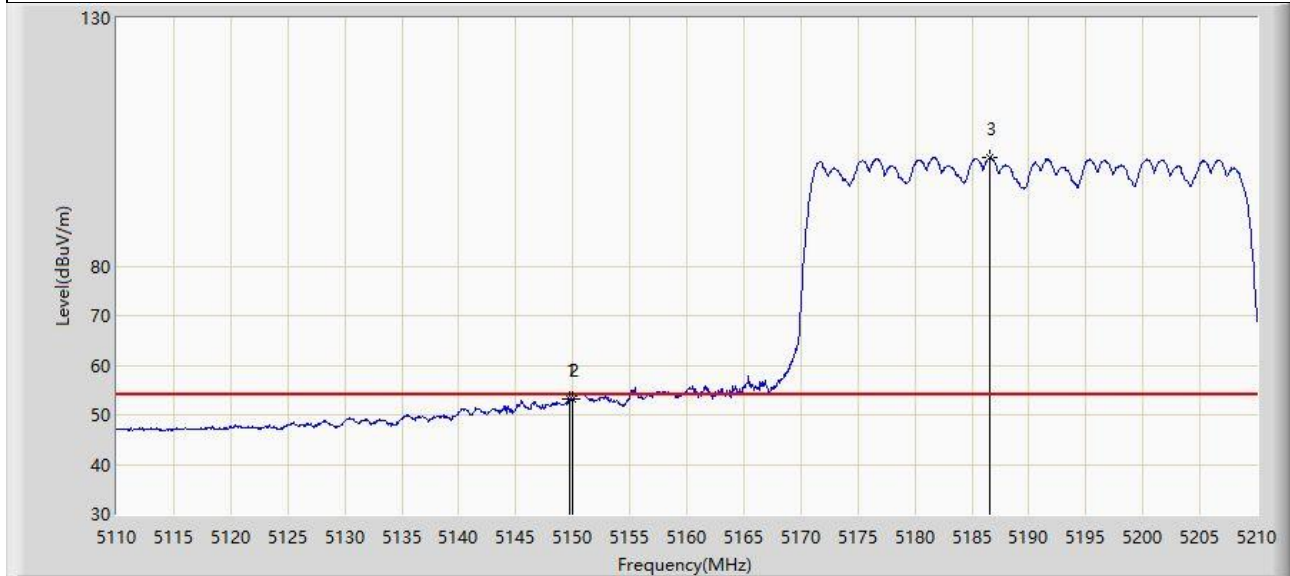


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5149.700	53.137	49.358	-0.863	54.000	3.779	AV
2	*	5150.000	53.254	49.474	-0.746	54.000	3.780	AV
3		5186.550	101.916	98.366	N/A	N/A	3.549	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310 MHz	

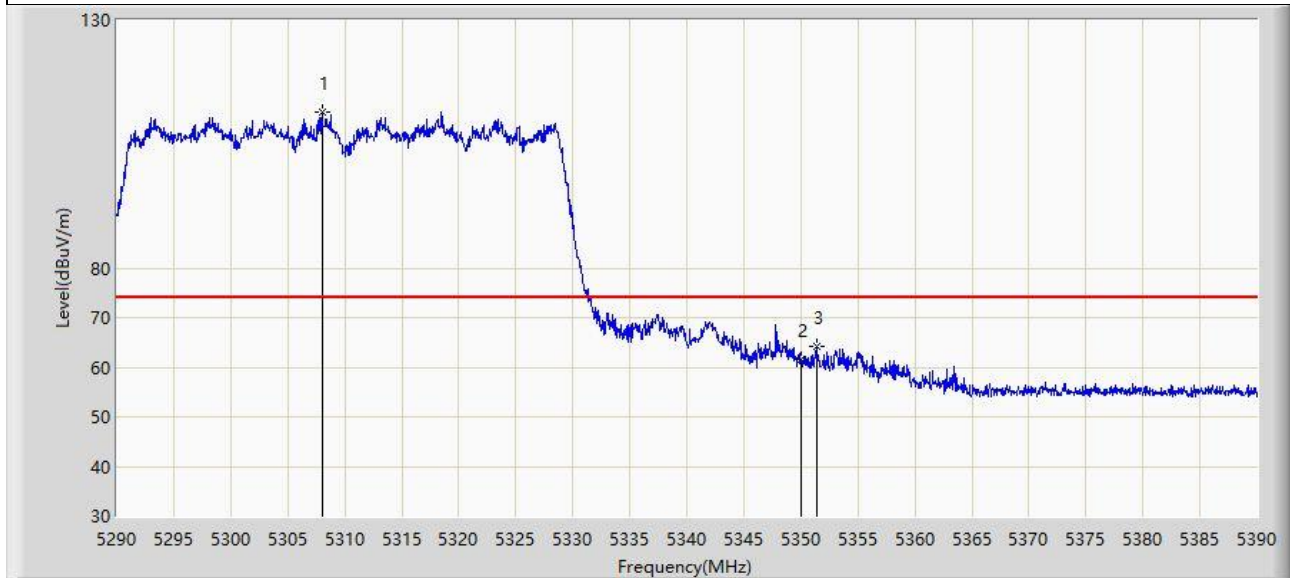

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5308.000	111.372	107.894	N/A	N/A	3.478	PK
2		5350.000	61.728	58.405	-12.272	74.000	3.323	PK
3	*	5351.450	64.152	60.866	-9.848	74.000	3.285	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310 MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5308.350	100.636	97.151	N/A	N/A	3.484	AV
2		5350.000	49.333	46.010	-4.667	54.000	3.323	AV
3	*	5352.800	50.134	46.866	-3.866	54.000	3.268	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5300.350	113.779	110.447	N/A	N/A	3.332	PK
2		5350.000	67.534	64.211	-6.466	74.000	3.323	PK
3	*	5350.050	69.786	66.464	-4.214	74.000	3.322	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310 MHz	

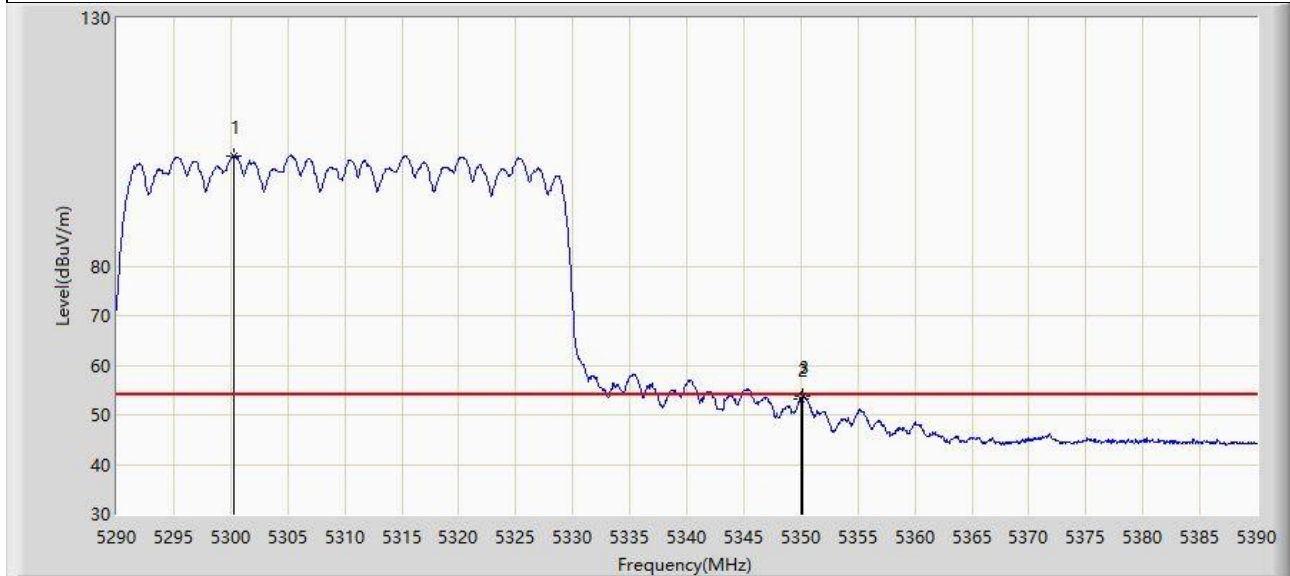


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5300.250	102.254	98.923	N/A	N/A	3.331	AV
2		5350.000	53.202	49.879	-0.798	54.000	3.323	AV
3	*	5350.100	53.793	50.472	-0.207	54.000	3.320	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5510 MHz	

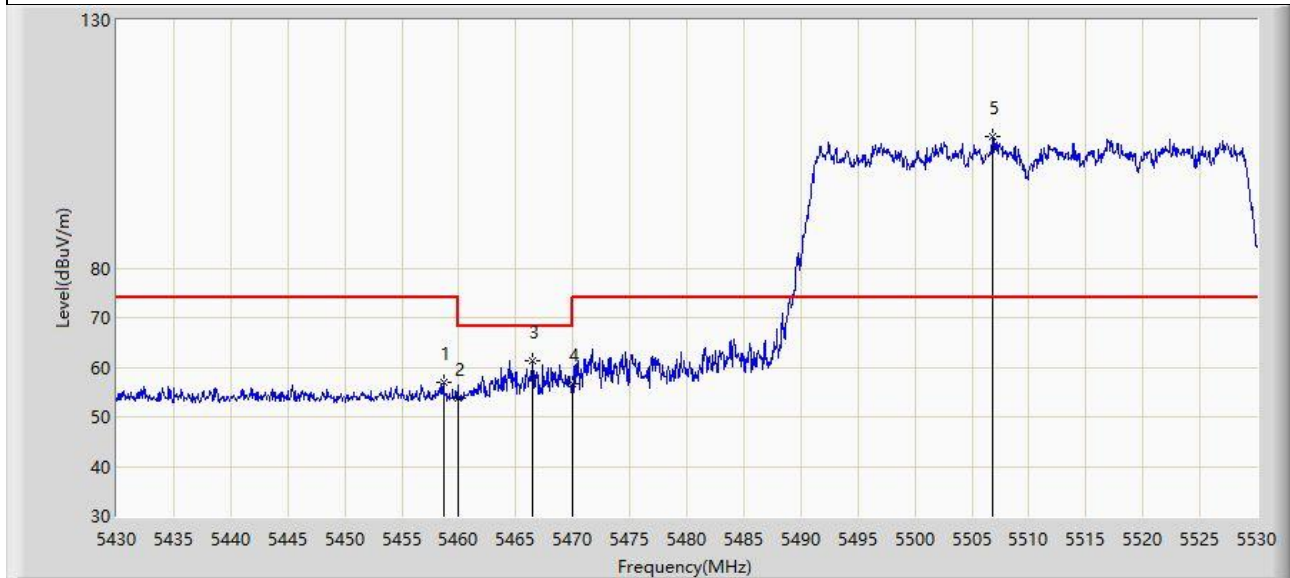


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.650	57.014	53.429	-16.986	74.000	3.585	PK
2		5460.000	53.711	50.101	-20.289	74.000	3.610	PK
3	*	5466.500	61.365	57.633	-6.835	68.200	3.733	PK
4		5470.000	56.727	52.929	-11.473	68.200	3.797	PK
5		5506.850	106.579	103.045	N/A	N/A	3.534	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5510 MHz	

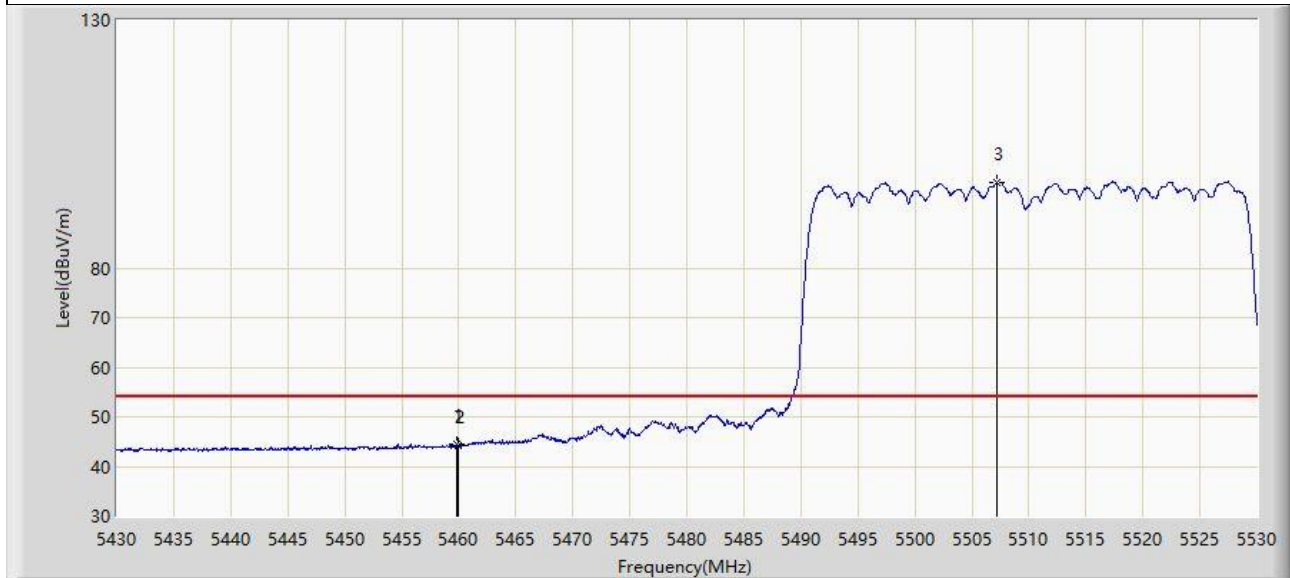

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.850	44.490	40.882	-9.510	54.000	3.608	AV
2		5460.000	44.080	40.470	-9.920	54.000	3.610	AV
3		5507.150	97.254	93.725	N/A	N/A	3.529	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5510 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.750	58.549	54.943	-15.451	74.000	3.605	PK
2		5460.000	57.289	53.679	-16.711	74.000	3.610	PK
3	*	5469.950	66.671	62.874	-1.529	68.200	3.796	PK
4		5470.000	66.526	62.728	-1.674	68.200	3.797	PK
5		5505.200	109.350	105.791	N/A	N/A	3.560	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5510 MHz	

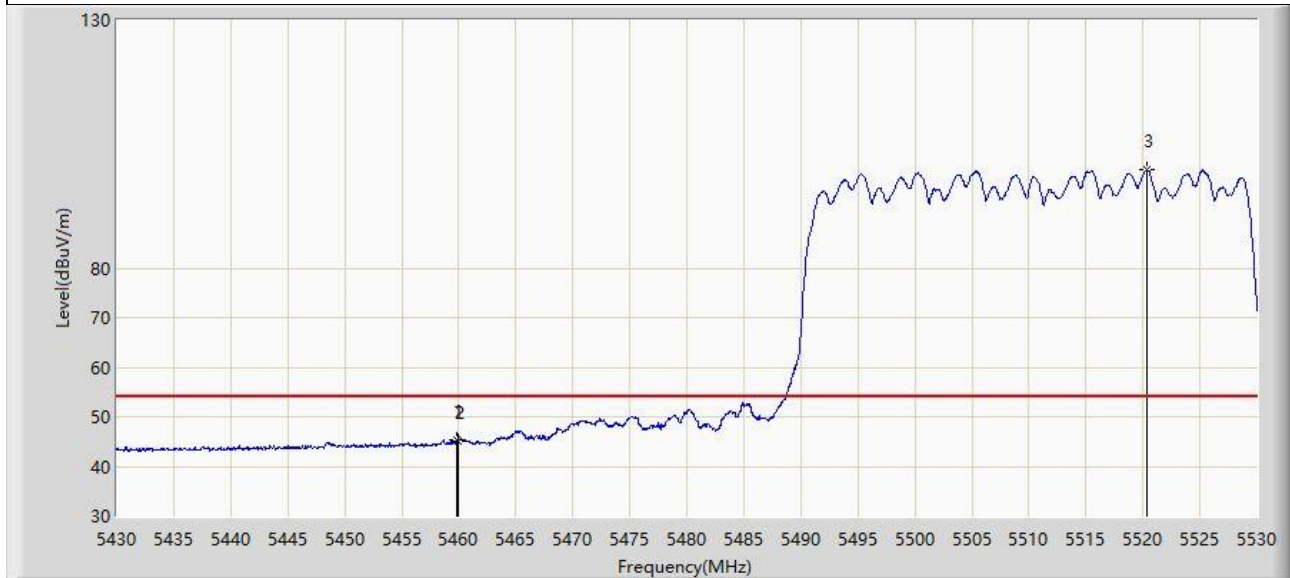

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.800	45.424	41.817	-8.576	54.000	3.607	AV
2		5460.000	45.173	41.563	-8.827	54.000	3.610	AV
3		5520.350	99.757	96.351	N/A	N/A	3.406	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-20
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5670 MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5677.400	112.169	107.693	N/A	N/A	4.476	PK
2		5725.000	63.714	58.580	-4.486	68.200	5.134	PK
3	*	5725.750	65.716	60.575	-2.484	68.200	5.141	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-19
Limit: FCC_5G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5670 MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5668.800	113.848	109.416	N/A	N/A	4.432	PK
2		5725.000	66.254	61.120	-1.946	68.200	5.134	PK
3	*	5725.450	68.030	62.892	-0.170	68.200	5.138	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5755 MHz	

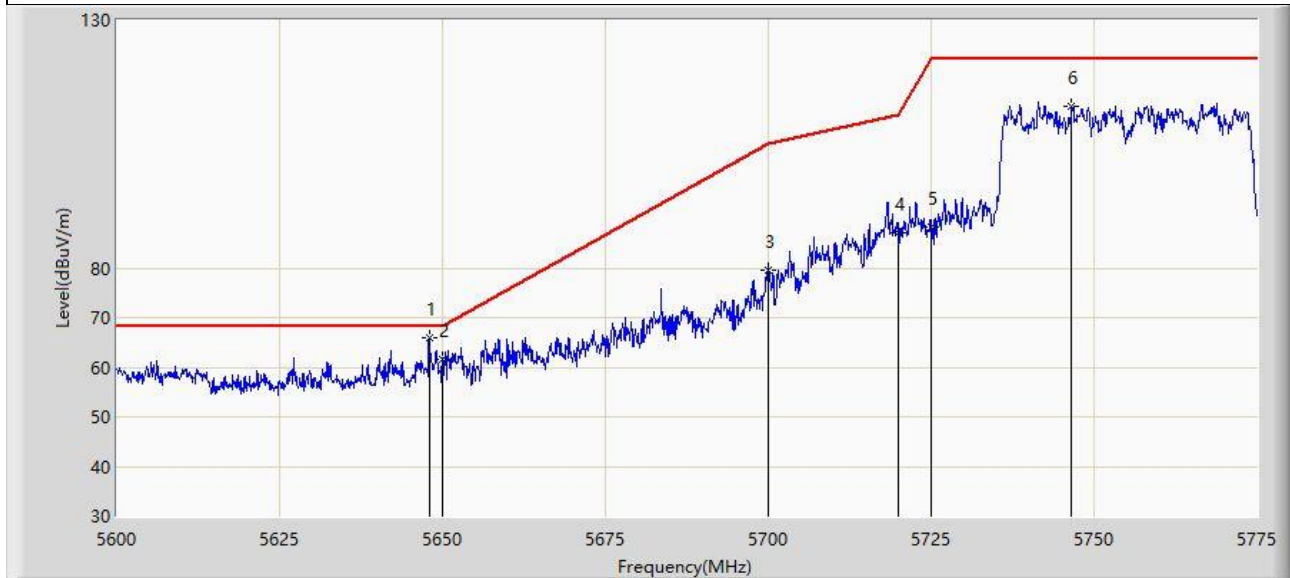


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.950	65.911	61.390	-2.289	68.200	4.521	PK
2		5650.000	61.676	57.173	-6.524	68.200	4.502	PK
3		5700.000	79.603	74.740	-25.597	105.200	4.863	PK
4		5720.000	86.998	81.905	-23.802	110.800	5.093	PK
5		5725.000	88.265	83.131	-33.935	122.200	5.134	PK
6		5746.475	112.470	107.494	N/A	N/A	4.975	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5755 MHz	

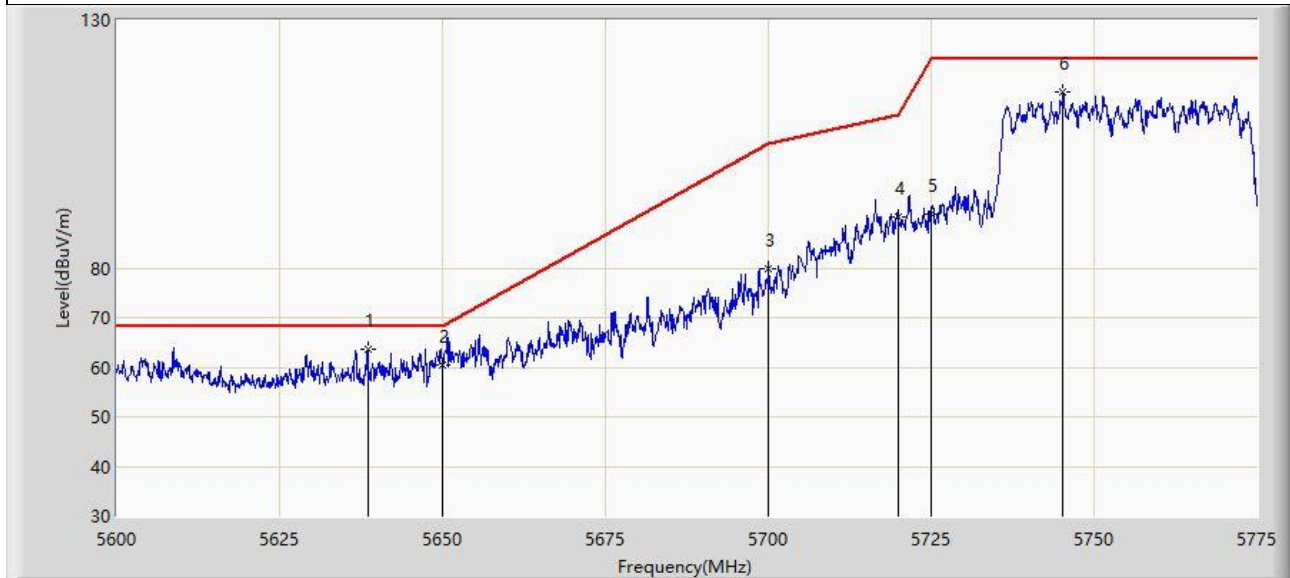


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5638.500	63.521	58.962	-4.679	68.200	4.559	PK
2		5650.000	60.499	55.996	-7.701	68.200	4.502	PK
3		5700.000	79.974	75.111	-25.226	105.200	4.863	PK
4		5720.000	90.252	85.159	-20.548	110.800	5.093	PK
5		5725.000	90.820	85.686	-31.380	122.200	5.134	PK
6		5745.250	115.558	110.587	N/A	N/A	4.970	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5795 MHz	

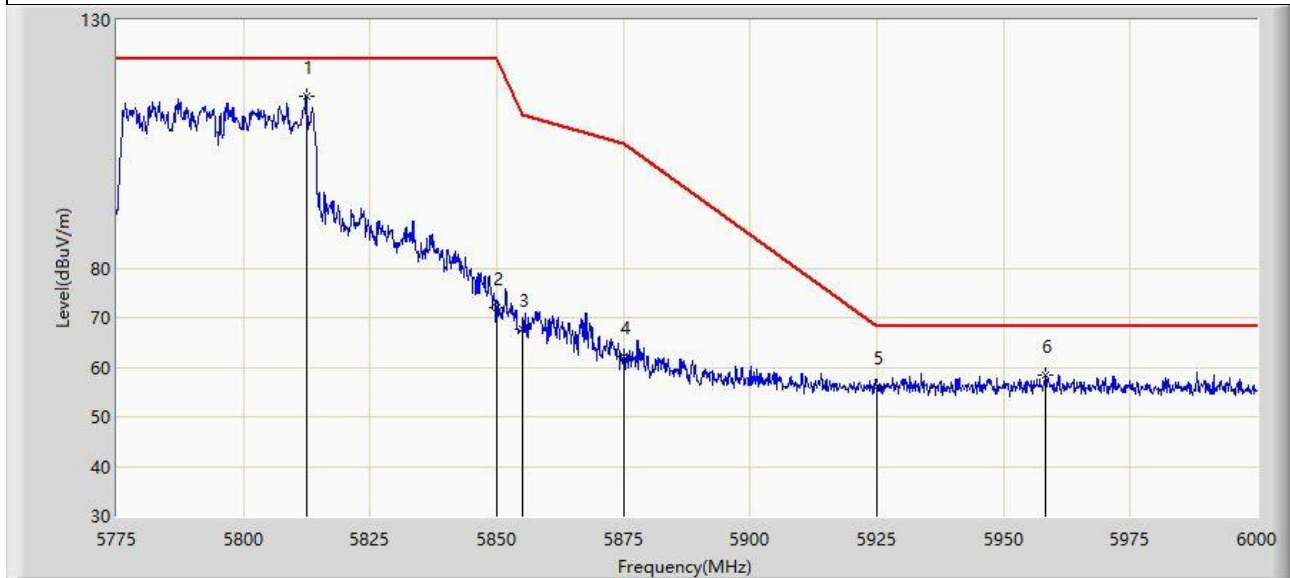


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5812.462	114.679	109.286	N/A	N/A	5.394	PK
2		5850.000	71.938	66.526	-50.262	122.200	5.412	PK
3		5855.000	67.557	62.097	-43.243	110.800	5.460	PK
4		5875.000	62.315	56.806	-42.885	105.200	5.509	PK
5		5925.000	56.224	50.715	-11.976	68.200	5.509	PK
6	*	5958.150	58.451	52.866	-9.749	68.200	5.585	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-04-08
Limit: FCC_5.8G_RE (3 m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT40 at 5795 MHz	

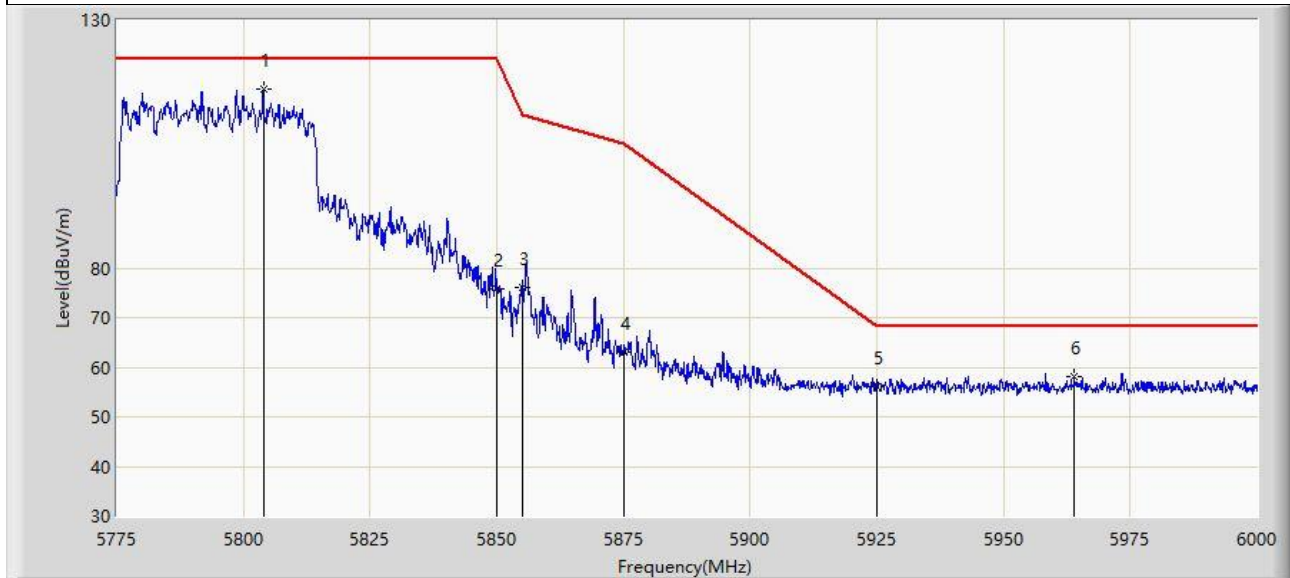

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5803.913	116.084	110.675	N/A	N/A	5.410	PK
2		5850.000	75.763	70.351	-46.437	122.200	5.412	PK
3		5855.000	76.145	70.685	-34.655	110.800	5.460	PK
4		5875.000	62.975	57.466	-42.225	105.200	5.509	PK
5		5925.000	56.102	50.593	-12.098	68.200	5.509	PK
6	*	5963.888	58.157	52.572	-10.043	68.200	5.585	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).