

iTube-101



MODEL
iTube-101

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. Operation is subject to the following two conditions; (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

AudiaX **iTube-101**

FM Transmitter Built in Dock & Charger
For iPod Shuffle

4 Channel Preset Memory
Luxurious, Compact and Functional Design
Blue Backlit LCD



FM Transmitter AudiaX(iTube-101)

- **Functional iPod shuffle accessory**
- **Car docking for the iPod shuffle.**
- **Car power charging for the iPod shuffle**
- **Transmit the audio from the iPod shuffle to the car**
- **Full frequency range (88.1MHz ~ 107.9MHz)**
- **Auto on/off**
- **4 Channel preset memory function**

Digiana Co., Ltd

Address : #1414 Hyundaiventureville 713 Suseo-Dong, Kangnam-Ku, Seoul, Korea

Tel : 82-2-2040-6212~2 Fax : 82-2-2040-6213

iTube-101

Specification		
Index	Specification	Remark
Frequency	88.1MHz ~ 107.9Mhz	199Channel
Power Supply	10~24V	
Out Power	5V, 500mA	
FMT Operating Power Consumption	20mA@12V	
Audio Input Level	100mV ~ 1.5V	
Audio input Range	100Hz~ 15KHz	
Stereo Separation	40dB	
Transfer Mode	RF FM (F3E)	
Output power	250uV/M	
Output Range	10m	
Operating Temp	-10 ~ 50 ℃	
Storage Temp	-20 ~ 70 ℃	
Channel Memory	4 Channels	Preset
Size (inch)	12.5 * 1 * 2	
Weight (g)	68	

General Specification		
Index	Specification	Remark
LCD Display	Frequency, 4 Channel Preset Memory	
LCD backlight	Blue	
Deco Light	Blue	


Digiana Co., Ltd

Address : #1414 Hyundaiventureville 713 Suseo-Dong, Kangnam-Ku, Seoul, Korea

Tel : 82-2-2040-6212~2 Fax :82-2-2040-6213

iTube-101

Composition

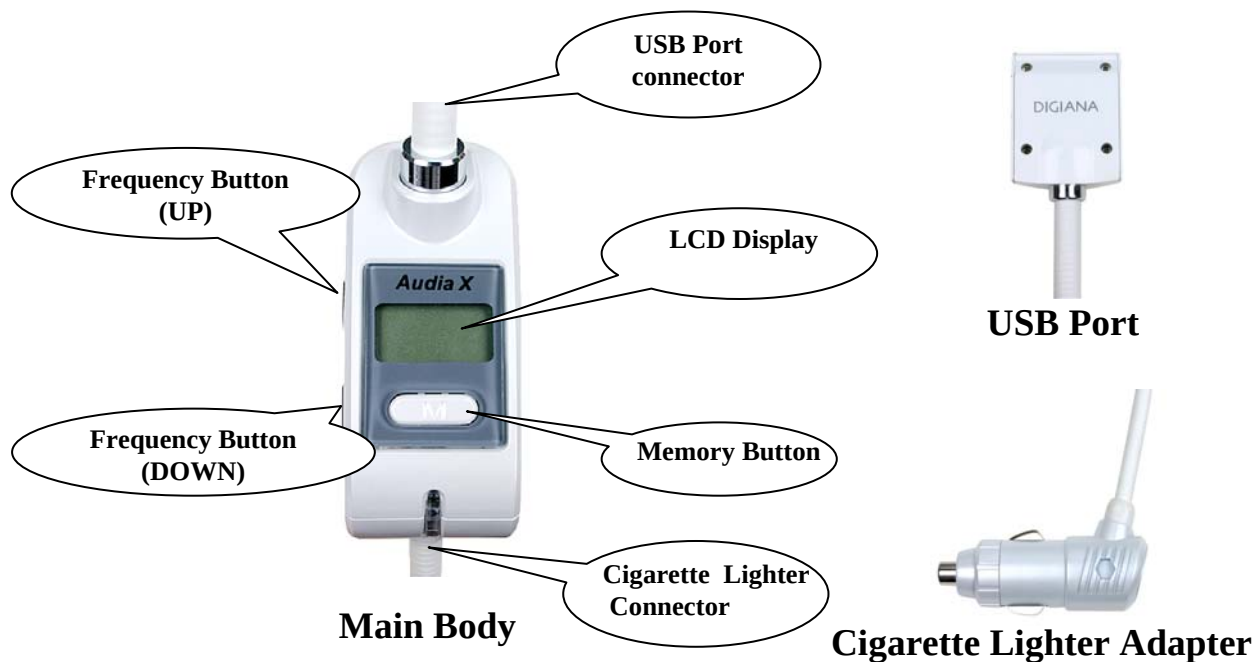

Key Function

Frequency Button (UP)

- ▶ Short : 0.1MHz UP
- ▶ Long : 1 MHz UP

Frequency Button (DOWN)

- ▶ Short : 0.1MHz DOWN
- ▶ Long : 1MHz DOWN

Memory Button

- ▶ Short : Convert Memory Mode
- ▶ 4 Channels preset Memory Display
(whenever push the short term, move to existing memory channels (A,B, C, D))
- ▶ Long : Current frequency memory

Digiana Co., Ltd

Address : #1414 Hyundaiventureville 713 Suseo-Dong, Kangnam-Ku, Seoul, Korea

Tel : 82-2-2040-6212~2 Fax :82-2-2040-6213

iTube-101

Function



- * FM FULL BAND
(Multi Channel Support:199 Channel)
- * 1 MHz/0.1MHz
(Precision Frequency Control)
- * FULL STEREO SOUND



- * Dock & Charger with FM transmitter



- * Luxurious, Compact and Functional Design



- * Deco light
- * Back light
- * LCD DISPLAY
(Frequency,
4 Channel Preset memory)

Digiana Co., Ltd

Address : #1414 Hyundaiventureville 713 Suseo-Dong, Kangnam-Ku, Seoul, Korea

Tel : 82-2-2040-6212~2 Fax : 82-2-2040-6213

iTube-101

User Manual



1. Plug the unit into the car cigarette lighter

**2. Plug the iPod shuffle onto it
(The unit will automatically be turned on)**



**3. Select an empty channel frequency
that public radio stations do not use**

**4. Set the same channel frequency by
pressing the upper(0.1/1MHZ) or the
lower(0.1/1MHZ) button of
Audiax(iTube-101)**



**5. Control the music player from
iPod Shuffle**

Digiana Co., Ltd

Address : #1414 Hyundaiventureville 713 Suseo-Dong, Kangnam-Ku, Seoul, Korea

Tel : 82-2-2040-6212~2 Fax :82-2-2040-6213