

Test Report No:
23A0648R-RFUSV03S-A

TEST REPORT

FCC Rules&Regulations

Product Name	Communication Module
Brand Name	muRata
Model No.	LBEE5XV1YM
FCC ID	QHQ-LB1YM
Applicant's Name / Address	Laerdal Medical AS P.O. Box 377, Tanke Svilandsgate 30 Stavanger 4002 Norway
Manufacturer's Name / Address	Murata Manufacturing Co., Ltd. 1-10-1, Higashikotari, Nagaokakyo-shi, Kyoto 617-8555 Japan
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart E Section 15.407 ANSI C63.10-2013
Verdict Summary	IN COMPLIANCE
Documented By	 Hailey Peng
Approved By	 Allen Lin
Date of Receipt	Oct. 25, 2023
Date of Issue	Dec. 15, 2023
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	3
General Conditions.....	3
Revision History.....	4
Permissive Change.....	5
Summary of Test Result.....	6
Comments and Remarks.....	6
1. General Information	7
1.1. EUT Description.....	7
1.2. EUT Information.....	8
1.3. Applicable Standards.....	8
1.4. Testing Location Information.....	8
1.5. Measurement Uncertainty.....	9
1.6. List of Test Equipment	9
2. Test Configuration of EUT.....	10
2.1. Test Condition	10
2.2. Test Software Version	10
2.3. The Worst Case Measurement Configuration	11
2.4. Tested System Details	12
2.5. Configuration of tested System	12
3. AC Power Line Conducted Emission.....	13
3.1. Test Setup.....	13
3.2. Test Limit.....	13
3.3. Test Procedure.....	13
3.4. Test Result of AC Power Line Conducted Emission	13
4. Transmitter Radiated Spurious Emission.....	14
4.1. Test Setup.....	14
4.2. Test Limit.....	15
4.3. Test Procedure.....	16
4.4. Test Result of Transmitter Radiated Spurious Emission	16
Appendix A. Test Result of AC Power Line Conducted Emission	
Appendix B. Test Result of Transmitter Radiated Spurious Emission	
Appendix C. Test Result of Radiated Emissions Co-location	
Appendix D. Test Setup Photograph	

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
t be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Dec. 15, 2023

Permissive Change

Permissive Change	Modifications
Class II Permissive Change (C2PC)	1. Additional platform added (Product: LinkBox PLUS 2, Brand: Laerdal Medical AS, Model: 204-00250). 2. Add two same type antennas (Type: dipole, model: GEPH-057 and model: GEPH-023) but lower gain than the original certificate. After evaluating, it was verified for AC power line conducted emission and transmitter radiated spurious emission tests and record in the report.

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
3	AC Power Line Conducted Emission	PASS	-
4	Transmitter Radiated Spurious Emission	PASS	-
Note: The EUT was installed to the host (brand name: Laerdal Medical AS, model: 204-00250) to perform all the tests.			

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1. General Information

1.1. EUT Description

Frequency Range	5150 ~ 5250 MHz 5250 ~ 5350 MHz 5470 ~ 5725 MHz 5725 ~ 5850 MHz	
Operating Frequency / Channel Number	IEEE 802.11a IEEE 802.11n/ac (20 MHz)	5180 ~ 5240 MHz / 4 Channels 5260 ~ 5320 MHz / 4 Channels 5500 ~ 5720 MHz / 12 Channels 5745 ~ 5825 MHz / 5 Channels
	IEEE 802.11n/ac (40 MHz)	5190 ~ 5230 MHz / 2 Channels 5270 ~ 5310 MHz / 2 Channels 5510 ~ 5710 MHz / 6 Channels 5755 ~ 5795 MHz / 2 Channels
	IEEE 802.11ac (80 MHz)	5210 MHz / 1 Channel 5290 MHz / 1 Channel 5530 ~ 5690 MHz / 3 Channels 5775 MHz / 1 Channel
Type of Modulation	IEEE 802.11a/n	OFDM-BPSK, QPSK, 16QAM, 64QAM
	IEEE 802.11ac	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM

Accessories Information for the host (brand name: Laerdal Medical AS, model: 204-00250)					
No.	Equipment Name	Brand Name	Model No.	Rating	Remark
1	Adapter	FSP	FSP040-RHAN3	INPUT: 100-240V, 1.5A, 50-60Hz OUTPUT: 12.0V, 3.33A, 40.0W	With power cable : Non-Shielded, 1.2m (with a ferrite core)
2	Lithium-Ion Battrey	Laerdal Medical AS	204-00350	7.34V / 5700mAh (min 5500mAh) 41Wh	External battrey

Antenna Information							
Ant.	Brand Name	Model No.	Type	Antenna Gain (dBi)			
				U-NII 1	U-NII 2A	U-NII 2C	U-NII 3
0	SAN JOSE	GEPH-057	Dipole	1.78	1.78	-1.59	-0.37
1	SAN JOSE	GEPH-023	Dipole	3.30	3.30	2.88	4.42

For IEEE 802.11a/n/ac Mode: (2TX, 2RX)

Both Ant. 0 and Ant. 1 can be used as transmitting/receiving antennas, and they can transmit/receive signal simultaneously.

1.2. EUT Information

EUT Power Type	From Adapter / Battery			
EUT Function	☒	Point-to-multipoint	☐	Point-to-point
TPC Function	☐	With TPC Function	☒	Without TPC Function
Weather Band (5600 ~ 5650 MHz)	☒	With 5600 ~ 5650 MHz	☐	Without 5600 ~ 5650 MHz
Beamforming Function	☐	With beamforming	☒	Without beamforming
Product Type	☐	Outdoor AP	☐	Indoor AP
	☐	Fixed P2P AP	☒	Client

1.3. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ KDB 662911 D01 v02r01
- ♦ KDB 412172 D01 v01r01
- ♦ KDB 414788 D01 v01r01

1.4. Testing Location Information

Testing Location Information		
Test Laboratory : DEKRA Testing and Certification Co., Ltd.		
1 (TAF: 3024)	ADD: No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958	
2 (TAF: 3024)	ADD: No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958	
Test site number for address 1 includes HC-SR02. Test site number for address 2 includes HC-CB02, HC-CB03, HC-CB04, HC-SR10 and HC-SR12.		

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
AC Conduction Emission	HC-SR02	Igor Tseng	20.2 / 57	2023/12/05
Radiated Emission	HC-CB02	Gary Liao	22.1~23 / 60~62	2023/11/20~2023/11/28

1.5. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Test Item	Uncertainty
AC Power Line Conducted Emission	± 2.34 dB
Transmitter Radiated Spurious Emission	± 3.52 dB below 1 GHz ± 3.56 dB above 1 GHz

1.6. List of Test Equipment

HC-SR02

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Artificial Mains Network	R&S	ENV4200	848411/010	9kHz-30MHz, 4line/100A	2022/12/19	2023/12/18
EMI Test Receiver	R&S	ESR3	102608	9 kHz - 3.6 GHz	2023/09/19	2024/09/18
Two-Line V-Network	R&S	ENV216	100096	9kHz-30MHz	2023/06/02	2024/06/01
Coaxial Cable(9 m)	Harbour	RG-400	HC-SR02	9 kHz-2500 MHz	2023/08/04	2024/08/03
EMI Testing System	AUDIX	e3 210616 dekra V9	HC-SR02	N/A	N/A	N/A

HC-CB02

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Signal Analyzer	R&S	FSVA40	101455	10 Hz-40 GHz	2023/10/03	2024/10/02
Trilog Broadband Antenna	Schwarzbeck	VULB 9168	1272	30 MHz-2 GHz	2023/04/13	2024/04/12
Double Ridged Horn Antenna	RF SPIN	DRH18-E	211211A18EN	1G-18GHz	2023/11/09	2024/11/08
Horn Antenna	Schwarzbeck	BBHA 9170	203	18G-40GHz	2023/02/13	2024/02/12
Pre-Amplifier	EMCI	EMC01820I	980365	30M-8 GHz,20 dB	2023/04/07	2024/04/06
Pre-Amplifier	EMEC	EM01G18GA	060741	1G-18 GHz,50 dB	2023/05/05	2024/05/04
Pre-Amplifier	DEKRA	AP-400C	201801231	18G-40 GHz,48 dB	2023/10/03	2024/10/02
EMI Test Receiver	R&S	ESR7	102260	10 Hz-7 GHz	2022/12/01	2023/11/30
Magnetic Loop Antenna	Teseq	HLA 6121	44287	0.01-30 MHz	2023/10/13	2024/10/12
Coaxial Cable(13m)	Suhner	SF104	HC-CB02	30M-18 GHz	2023/08/14	2024/08/13
Coaxial Cable(3m)	Suhner,Rosnol	SF102_UP0264	HC-CB02-1	18G-40 GHz 3 m	2023/08/14	2024/08/13
Radiated Software	AUDIX	e3 V9	HC-CB02_1	N/A	N/A	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition		
Testing Voltage	Power by adapter	AC 120V/60Hz
	Power by battrey	DC 7.34V

2.2. Test Software Version

Test Software Version	PUTTY v0.78
-----------------------	-------------

2.3. The Worst Case Measurement Configuration

Tests Item	AC Power Line Conducted Emission
Test Condition	AC power line conducted measurement for line and neutral
Operating Mode	Transmit
1	Power by adapter

Tests Item	Transmitter Radiated Spurious Emission
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Transmit
1	Power by adapter
2	Power by battrey
Mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	Transmit
The EUT was performed at X axis, Y axis and Z axis position for transmitter radiated spurious emission test. The worst case was found at X axis, so the measurement will follow this same test configuration.	

Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Transmit
1	WiFi 2.4 GHz + Bluetooth
2	WiFi 5 GHz + Bluetooth
Refer to Appendix C for Radiated Emission Co-location.	

Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	Transmit
1	WiFi 2.4 GHz + Bluetooth
2	WiFi 5 GHz + Bluetooth
Refer to DEKRA Test Report No.: 23A0648R-RFUSV17S-A for Co-location RF Exposure Evaluation.	


Note:

1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For transmitter radiated spurious emission below 1 GHz and AC power line conducted emission have performed all modes of operation were investigated and the worst-case emissions are reported.
3. The modulation and bandwidth are similar for 802.11n mode for HT20/HT40 and 802.11ac mode for VHT20/VHT40/VHT80, therefore investigated worst case to representative mode in test report.

2.4. Tested System Details


No.	Equipment	Brand Name	Model No.	Serial No.
1	NB (Notebook)	Lenovo	80T7	N/A
2	Router	ASUS	RT-AX88U	N/A

2.5. Configuration of tested System

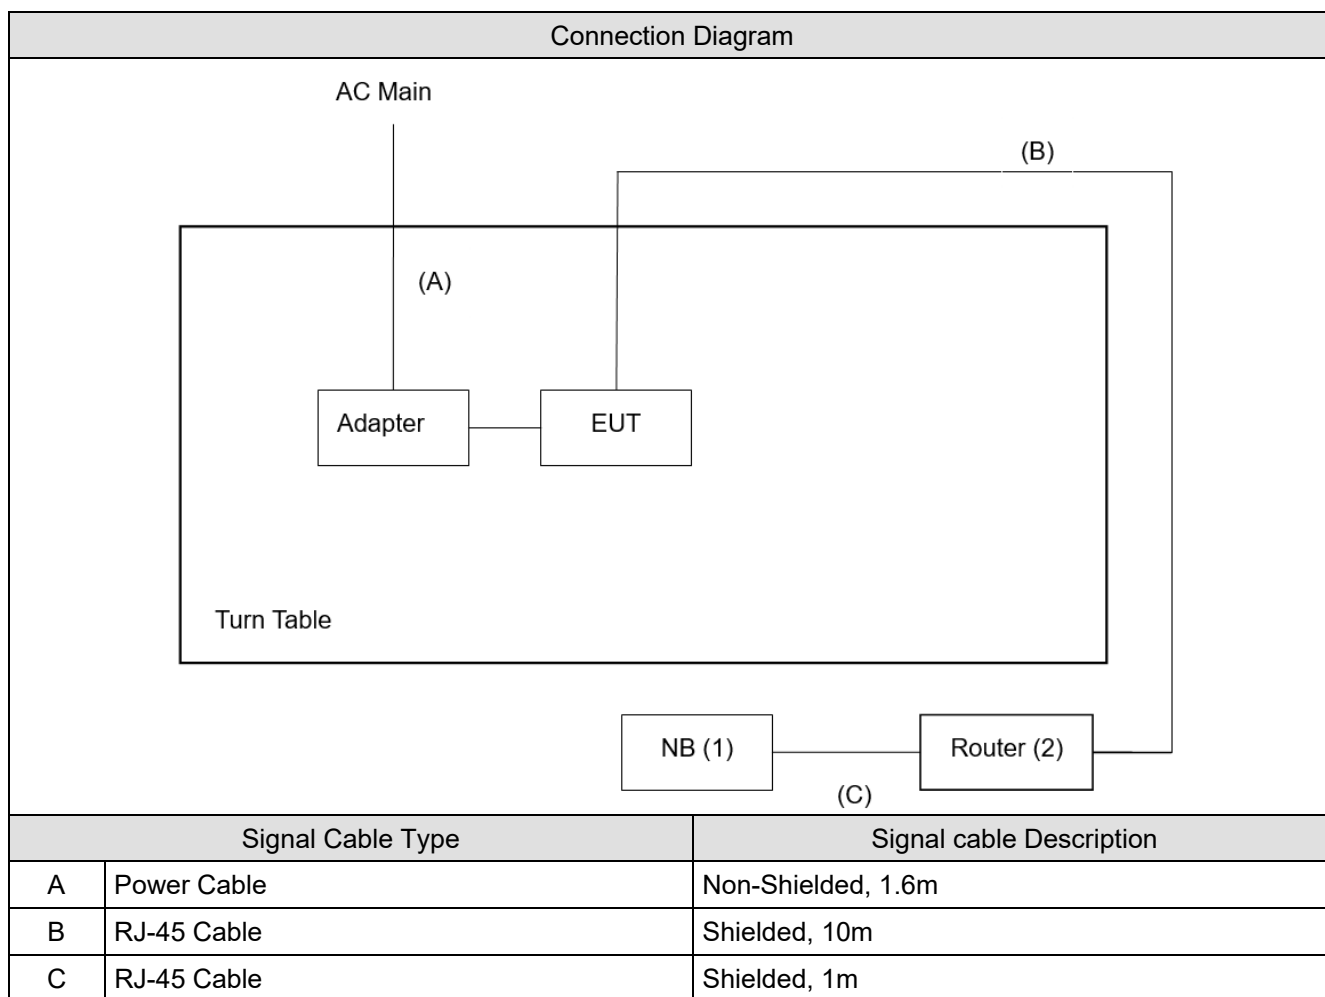

3. AC Power Line Conducted Emission

3.1. Test Setup

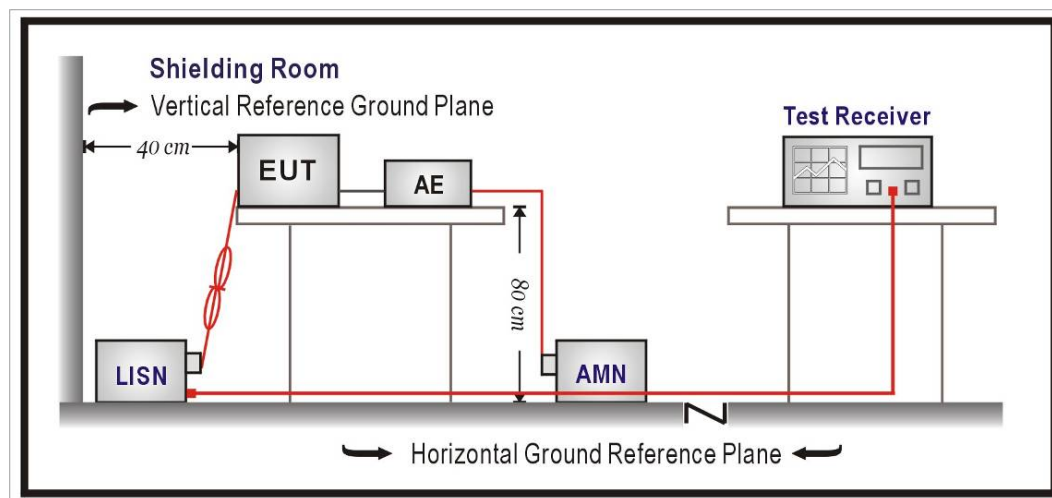

3.2. Test Limit

Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remark: In the above table, the tighter limit applies at the band edges.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs.)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.


3.4. Test Result of AC Power Line Conducted Emission

Refer as Appendix A


4. Transmitter Radiated Spurious Emission

4.1. Test Setup


9 kHz ~ 30 MHz

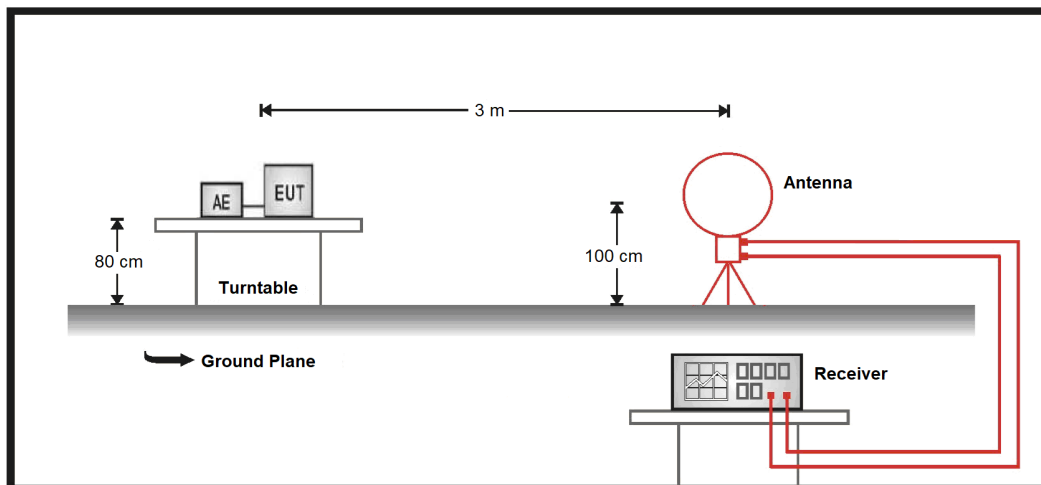

30 MHz ~ 1 GHz

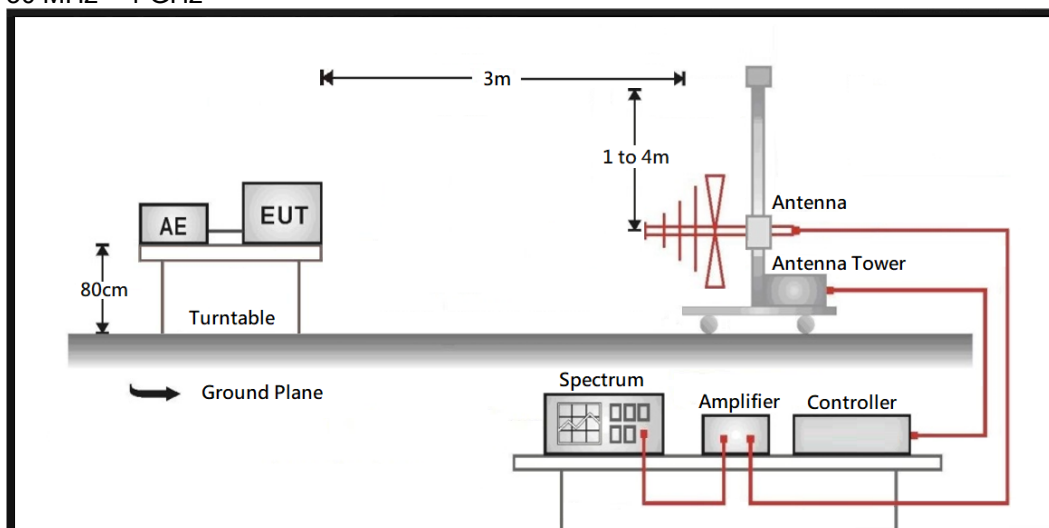

Above 1 GHz

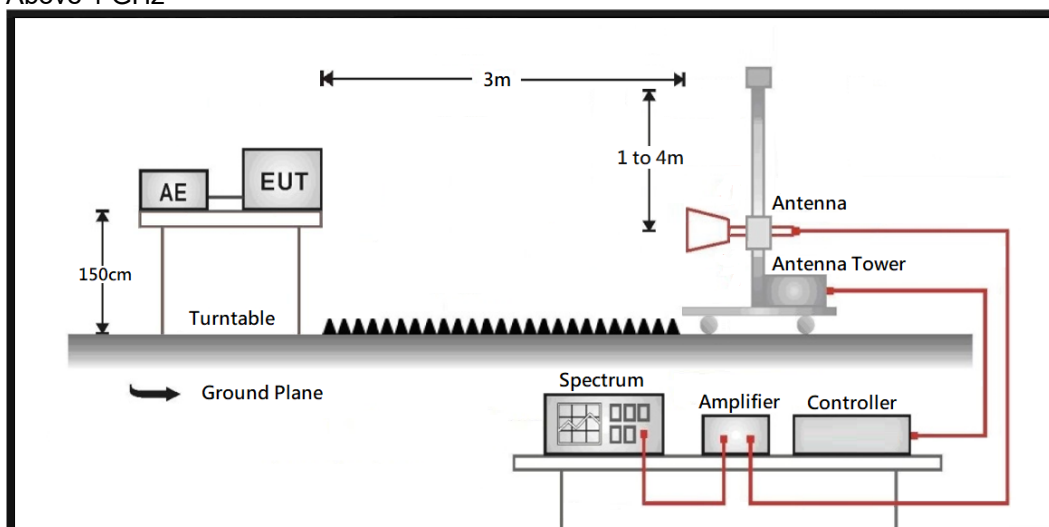

4.2. Test Limit

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Unwanted Emission out of the restricted bands Test Limit

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (dBuV/m@3m)
5150 – 5250	-27	68.2
5250 – 5350	-27	68.2
5470 – 5725	-27	68.2
5725 – 5850	-27 ^{*1}	68.2 ^{*1}
	10 ^{*2}	105.2 ^{*2}
	15.6 ^{*3}	110.8 ^{*3}
	27 ^{*4}	122.2 ^{*4}
5850 – 5895	(i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz. (ii) For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz. (iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.	

^{*1} beyond 75 MHz or more above of the band edge.
^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.
^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts).}$$

4.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The additional latch filter below 1 GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz, above 1 GHz are 1 MHz.


The frequency range from 9 kHz to 10th harmonics and included The frequency range from the lowest oscillator frequency generated within the device up to the 10th harmonic was checked is checked.

4.4. Test Result of Transmitter Radiated Spurious Emission

Refer as Appendix B

Appendix A. Test Result of AC Power Line Conducted Emission


Test Mode	Mode 1	Phase	Line
Test Condition	802.11ac (80 MHz) / Ant. 0 + Ant. 1 / 5775 MHz		

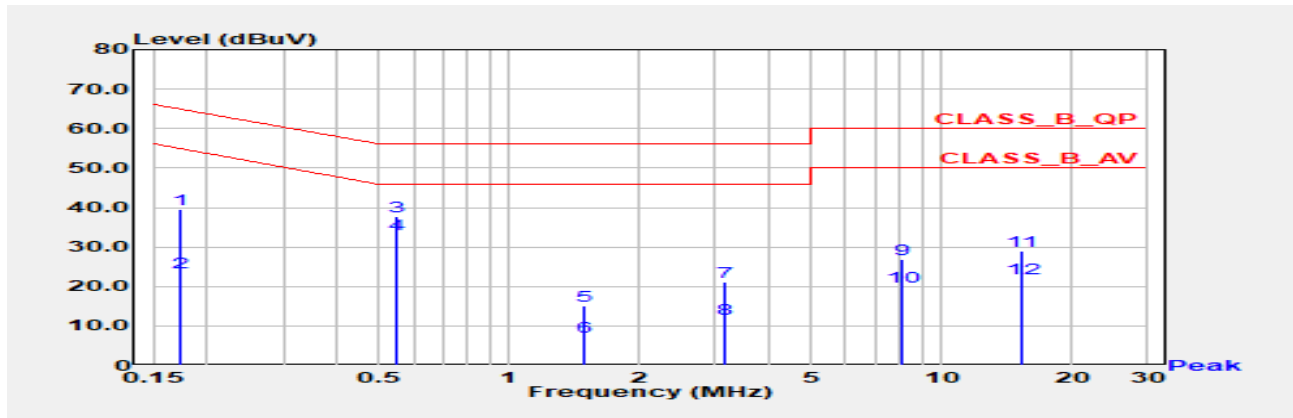

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Test Mode	Mode 1	Phase	Neutral
Test Condition	802.11ac (80 MHz) / Ant. 0 + Ant. 1 / 5775 MHz		

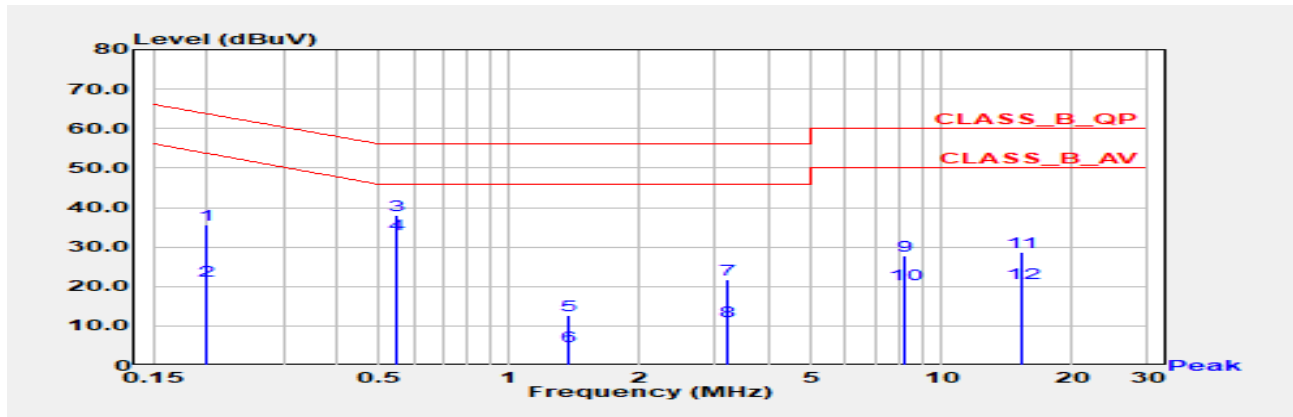

No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.199	35.72	63.63	-27.91	26.11	9.61	QP
2	0.199	21.39	53.63	-32.24	11.78	9.61	AV
3	0.546	37.99	56.00	-18.01	28.34	9.65	QP
*4	0.546	33.31	46.00	-12.69	23.66	9.65	AV
5	1.372	12.64	56.00	-43.36	2.92	9.72	QP
6	1.372	4.71	46.00	-41.29	-5.01	9.72	AV
7	3.192	21.60	56.00	-34.40	11.79	9.81	QP
8	3.192	11.28	46.00	-34.72	1.47	9.81	AV
9	8.182	27.85	60.00	-32.15	17.81	10.04	QP
10	8.182	20.58	50.00	-29.42	10.54	10.04	AV
11	15.276	28.74	60.00	-31.26	18.40	10.35	QP
12	15.276	20.80	50.00	-29.20	10.45	10.35	AV

Note:


1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Appendix B. Test Result of Transmitter Radiated Spurious Emission

30 MHz ~ 1 GHz

Test Mode: Mode 1

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_acB0_TX_5775MHz
Test By :Gary

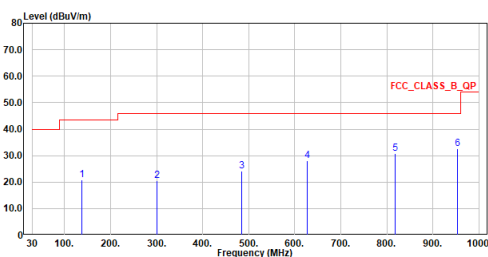


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	137.282	20.86	43.50	-22.64	24.51	-3.65	QP
2	301.067	20.68	46.00	-25.32	22.73	-2.05	QP
3	485.027	24.25	46.00	-21.75	21.54	2.71	QP
4	626.744	28.18	46.00	-17.82	22.42	5.76	QP
5	817.204	30.76	46.00	-15.24	21.96	8.80	QP
6	953.683	32.61	46.00	-13.39	21.85	10.76	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_acB0_TX_5775MHz
Test By :Gary

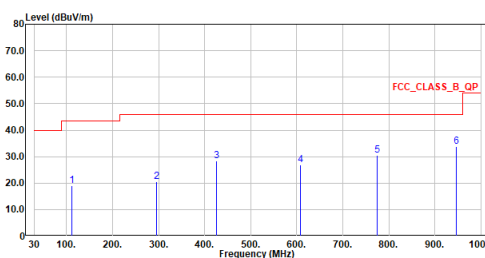


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	111.868	19.00	43.50	-24.50	24.45	-5.45	QP
2	295.586	20.59	46.00	-25.41	22.67	-2.08	QP
3	424.984	28.42	46.00	-17.58	27.03	1.39	QP
4	607.490	26.87	46.00	-19.13	21.15	5.72	QP
5	774.184	30.38	46.00	-15.62	22.08	8.30	QP
6	946.214	33.68	46.00	-12.32	23.01	10.67	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5180MHz
Test By :Gary

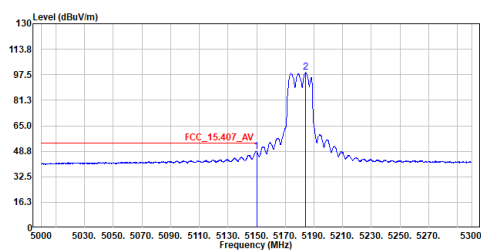


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	48.64	54.00	-5.36	25.17	23.47	Average
2	5184.200	98.92	-----	-----	75.41	23.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5180MHz
Test By :Gary

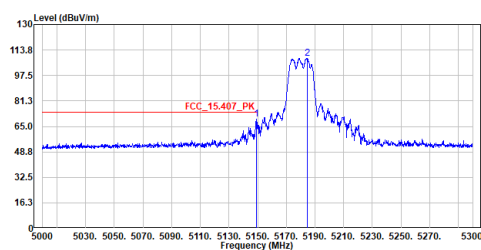


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.100	69.85	74.00	-4.15	46.38	23.47	Peak
2	5184.800	108.64	-----	-----	85.13	23.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5180MHz
Test By :Gary

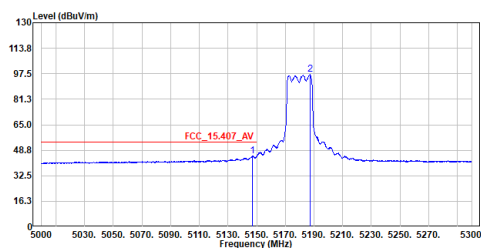


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.000	44.96	54.00	-9.04	21.49	23.47	Average
2	5187.200	96.90	-----	-----	73.39	23.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5180MHz
Test By :Gary

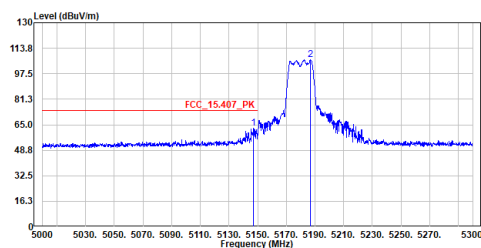


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.300	62.89	74.00	-11.11	39.42	23.47	Peak
2	5187.050	106.27	-----	-----	82.76	23.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5180MHz
Test By :Gary

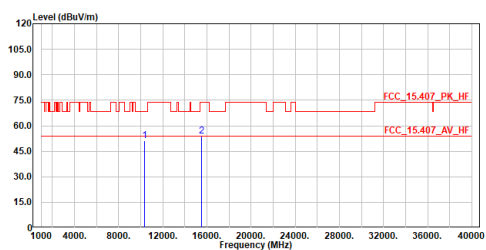

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10360.000	50.96	68.20	-17.24	54.44	-3.48	Peak
2	15540.000	53.71	74.00	-20.29	50.79	2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5180MHz
Test By :Gary

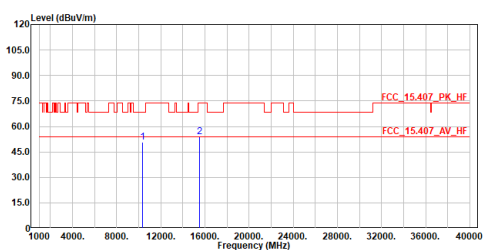

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10360.000	50.53	68.20	-17.67	54.01	-3.48	Peak
2	15540.000	53.94	74.00	-20.06	51.02	2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5220MHz
Test By :Gary

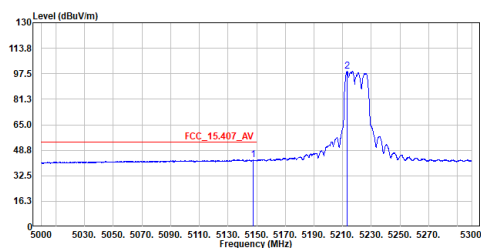

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5147.750	42.83	54.00	-11.17	19.36	23.47	Average
2	5213.000	99.31	-----	-----	75.80	23.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5220MHz
Test By :Gary

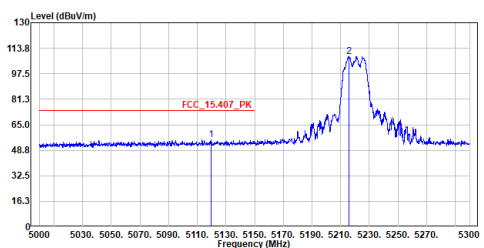

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5119.700	55.42	74.00	-18.58	31.96	23.46	Peak
2	5215.850	108.51	-----	-----	85.00	23.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5220MHz
Test By :Gary

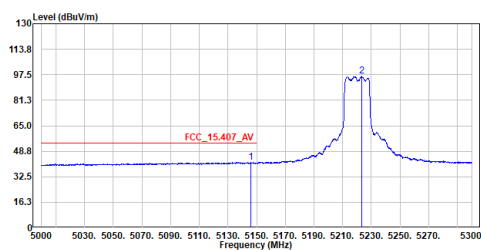

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5146.100	41.62	54.00	-12.38	18.15	23.47	Average
2	5223.350	96.60	-----	-----	73.07	23.53	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5220MHz
Test By :Gary

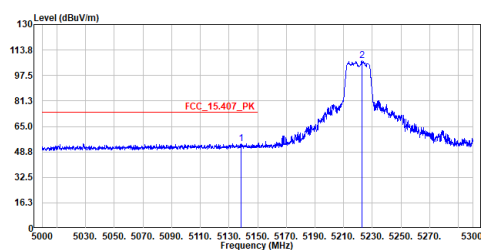

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5138.450	54.03	74.00	-19.97	30.57	23.46	Peak
2	5222.900	106.74	-----	-----	83.22	23.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5220MHz
Test By :Gary

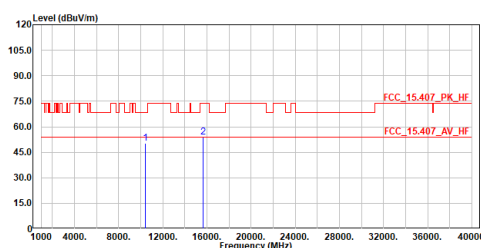

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10440.000	50.04	68.20	-18.16	53.45	-3.41	Peak
2	15660.000	53.89	74.00	-20.11	50.99	2.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5220MHz
Test By :Gary

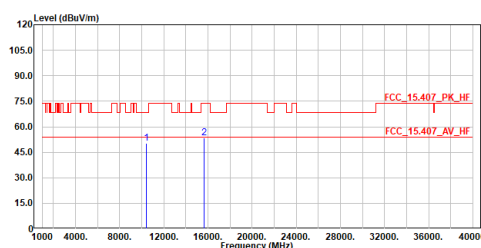

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10440.000	50.33	68.20	-17.87	53.74	-3.41	Peak
2	15660.000	53.65	74.00	-20.35	50.75	2.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5240MHz
Test By :Gary

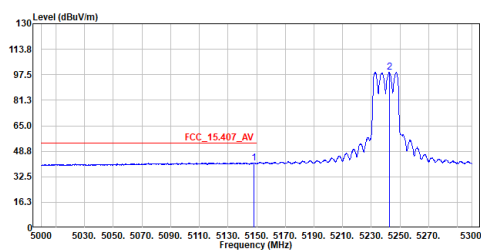

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5147.900	41.37	54.00	-12.63	17.90	23.47	Average
2	5242.550	99.12	-----	-----	75.59	23.53	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5240MHz
Test By :Gary

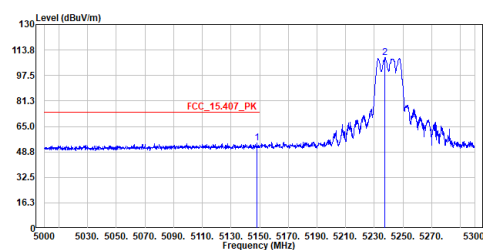

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5148.050	54.21	74.00	-19.79	30.74	23.47	Peak
2	5237.450	108.87	-----	-----	85.33	23.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5240MHz
Test By :Gary

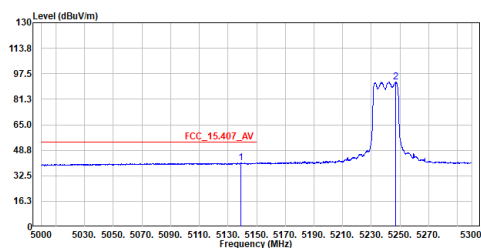

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5138.900	40.69	54.00	-13.31	17.23	23.46	Average
2	5247.050	92.41	-----	-----	68.88	23.53	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5240MHz
Test By :Gary

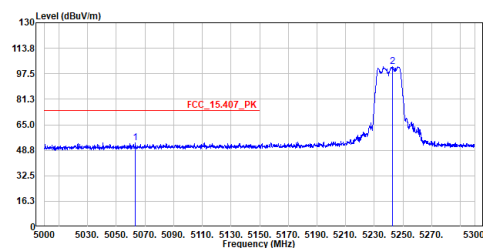

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5063.300	53.51	74.00	-20.49	30.09	23.42	Peak
2	5242.550	102.02	-----	-----	78.49	23.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5240MHz
Test By :Gary

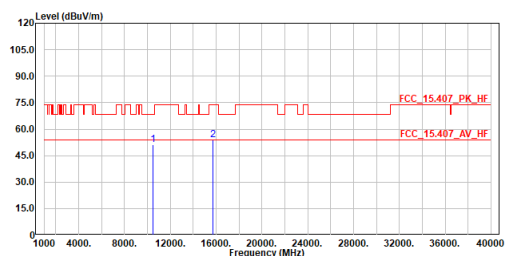

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10480.000	51.08	60.20	-17.12	54.45	-3.37	Peak
2	15720.000	53.92	74.00	-20.08	51.03	2.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5240MHz
Test By :Gary

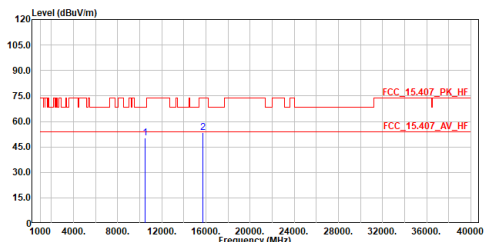

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10480.000	50.45	68.20	-17.75	53.82	-3.37	Peak
2	15720.000	53.44	74.00	-20.56	50.55	2.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5260MHz
Test By :Gary

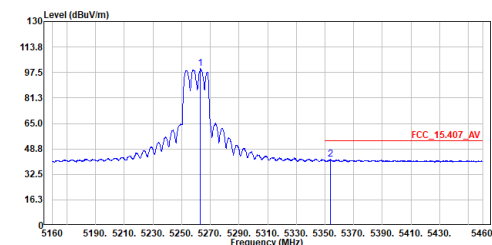

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5263.200	99.95	-----	-----	76.41	23.54	Average
2	5353.950	41.97	54.00	-12.03	18.36	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5260MHz
Test By :Gary

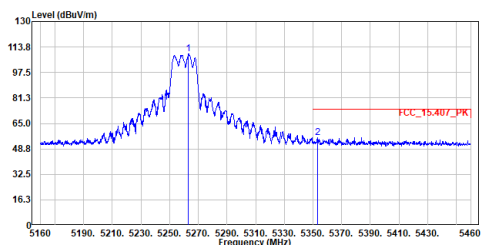

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5263.050	109.22	-----	-----	85.68	23.54	Peak
2	5353.200	56.06	74.00	-17.94	32.45	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5260MHz
Test By :Gary

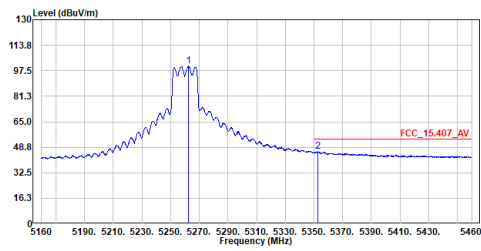

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5262.450	100.47	-----	-----	76.92	23.55	Average
2	5352.900	45.89	54.00	-8.11	22.28	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5260MHz
Test By :Gary

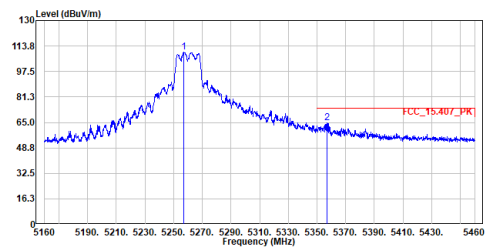

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5257.200	109.83	-----	-----	86.28	23.55	Peak
2	5357.100	64.92	74.00	-9.08	41.31	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5260MHz
Test By :Gary

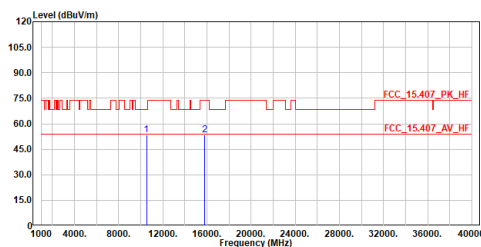

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10520.000	53.53	68.20	-14.67	56.86	-3.33	Peak
2	15780.000	53.52	74.00	-20.48	50.64	2.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5260MHz
Test By :Gary

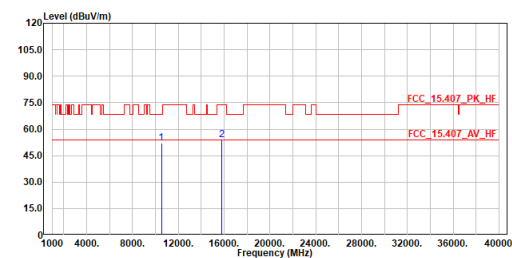

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10520.000	52.21	68.20	-15.99	55.54	-3.33	Peak
2	15780.000	53.92	74.00	-20.08	51.04	2.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5300MHz
Test By :Gary

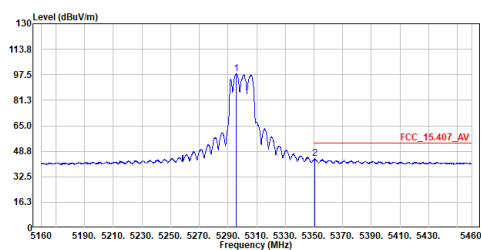


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5295.750	98.08	-----	-----	74.51	23.57	Average
2	5350.350	43.93	54.00	-10.07	20.32	23.61	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5300MHz
Test By :Gary

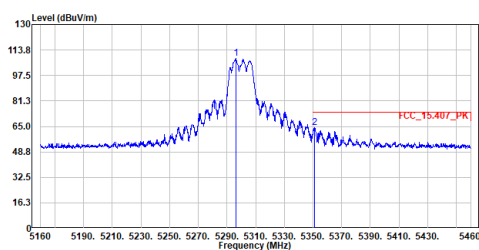


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5296.350	108.29	-----	-----	84.72	23.57	Peak
2	5351.250	64.41	74.00	-9.59	40.80	23.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5300MHz
Test By :Gary

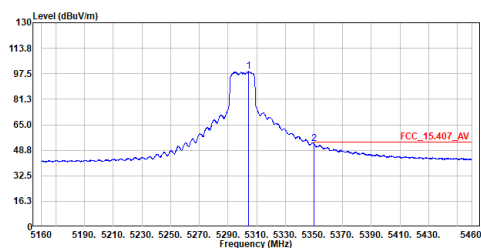


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5304.150	98.89	-----	-----	75.31	23.58	Average
2	5350.010	52.88	54.00	-1.12	29.27	23.61	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5300MHz
Test By :Gary

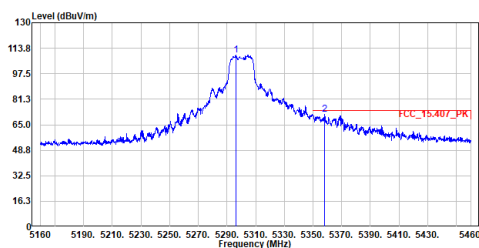


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5296.200	109.50	-----	-----	85.93	23.57	Peak
2	5358.000	71.84	74.00	-2.16	48.23	23.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5300MHz
Test By :Gary

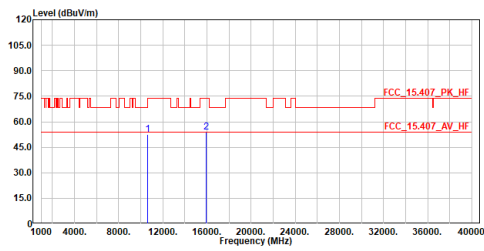


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10600.000	52.43	74.00	-21.57	55.64	-3.21	Peak
2	15900.000	53.83	74.00	-20.17	50.97	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5300MHz
Test By :Gary

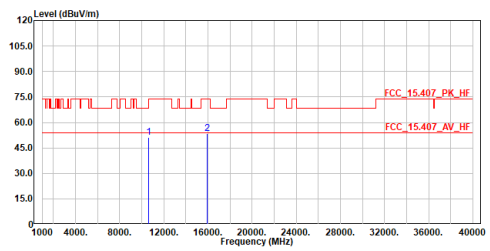


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10600.000	51.33	74.00	-22.67	54.54	-3.21	Peak
2	15900.000	53.47	74.00	-20.53	50.61	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5320MHz
Test By :Gary

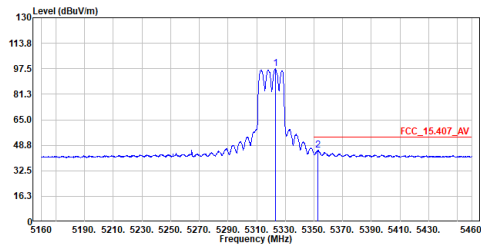


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5323.050	97.55	74.00	23.55	73.96	23.59	Average
2	5352.600	45.56	74.00	-28.44	21.95	23.61	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5320MHz
Test By :Gary

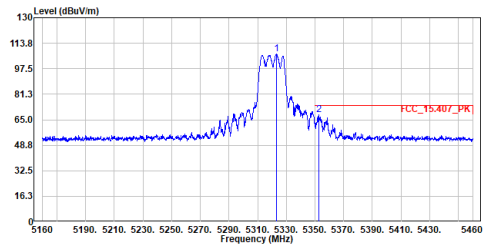


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5323.350	106.82	74.00	32.82	83.23	23.59	Peak
2	5352.900	68.32	74.00	-5.68	44.71	23.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5320MHz
Test By :Gary

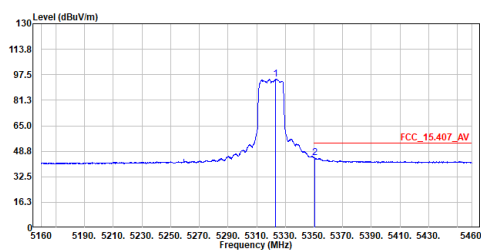

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5323.200	94.81	-----	-----	71.22	23.59	Average
2	5350.350	44.82	54.00	-9.18	21.21	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5320MHz
Test By :Gary

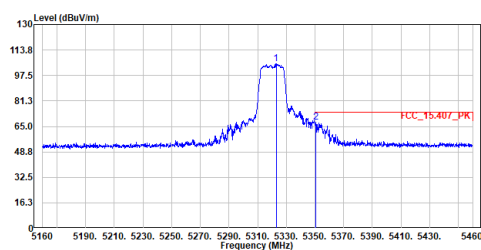

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5322.900	105.07	-----	-----	81.48	23.59	Peak
2	5350.350	67.90	74.00	-6.10	44.29	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5320MHz
Test By :Gary

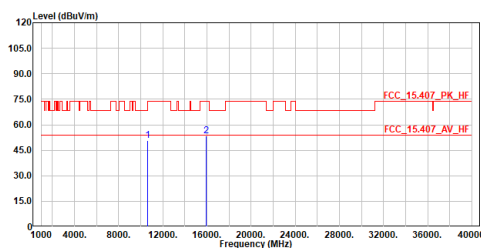

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10640.000	50.92	74.00	-23.08	54.06	-3.14	Peak
2	15960.000	53.55	74.00	-20.45	50.70	2.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5320MHz
Test By :Gary

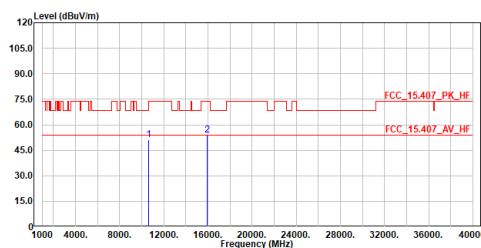

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10640.000	51.11	74.00	-22.89	54.25	-3.14	Peak
2	15960.000	53.75	74.00	-20.25	50.90	2.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5500MHz
Test By :Gary

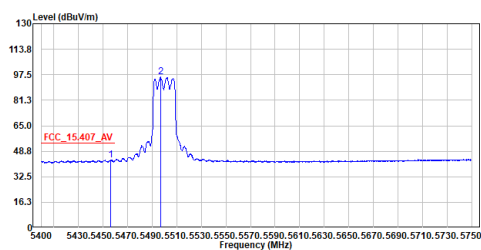

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5456.525	43.05	54.00	-10.95	19.37	23.68	Average
2	5496.775	95.93	-----	-----	72.23	23.70	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5500MHz
Test By :Gary

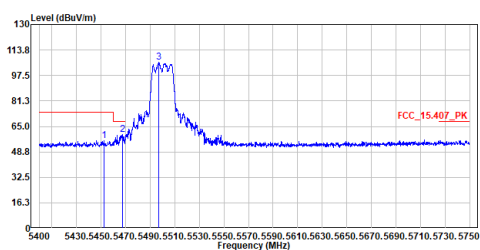

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5452.500	56.03	74.00	-17.97	32.36	23.67	Peak
2	5467.375	59.78	68.20	-8.42	36.10	23.68	Peak
3	5497.300	105.79	-----	-----	82.09	23.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5500MHz
Test By :Gary

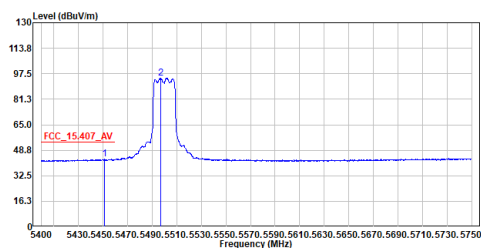

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5451.275	43.00	54.00	-11.00	19.33	23.67	Average
2	5496.950	94.89	-----	-----	71.19	23.70	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5500MHz
Test By :Gary

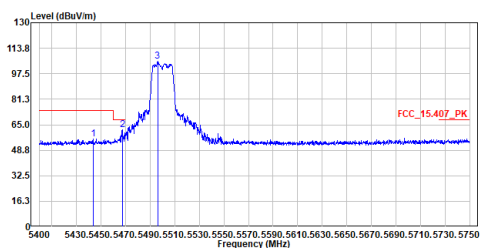

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5443.575	56.03	74.00	-17.97	32.37	23.66	Peak
2	5467.375	61.98	68.20	-6.22	38.30	23.68	Peak
3	5496.075	105.54	-----	-----	81.84	23.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5500MHz
Test By :Gary



No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11000.000	51.12	74.00	-22.88	53.69	-2.57	Peak
2	16500.000	53.23	68.20	-14.97	51.19	2.04	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5500MHz
Test By :Gary

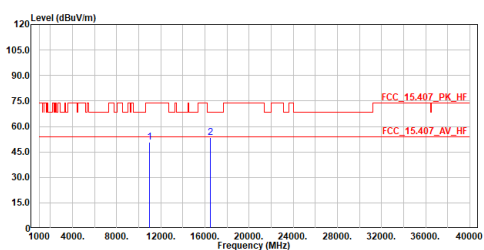

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11000.000	50.73	74.00	-23.27	53.30	-2.57	Peak
2	16500.000	53.46	68.20	-14.74	51.42	2.04	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5580MHz
Test By :Gary

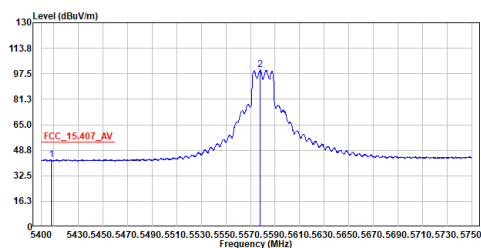

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5408.225	42.88	54.00	-11.12	19.24	23.64	Average
2	5577.975	99.87	-----	-----	75.92	23.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5580MHz
Test By :Gary

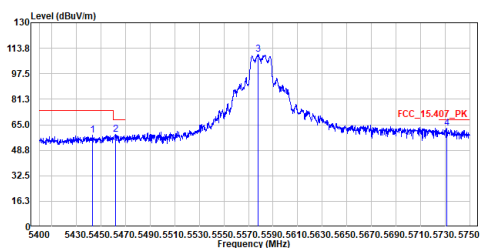

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5443.225	58.21	74.00	-15.79	34.55	23.66	Peak
2	5461.950	58.63	68.20	-9.57	34.95	23.68	Peak
3	5577.800	109.72	-----	-----	85.77	23.95	Peak
4	5731.100	62.67	68.20	-5.53	38.24	24.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5580MHz
Test By :Gary

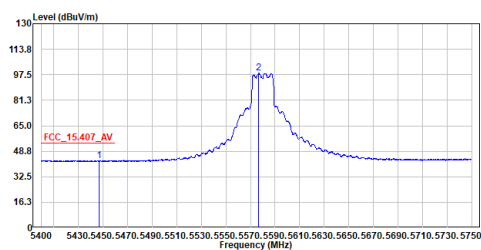

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5446.725	42.88	54.00	-11.12	19.22	23.66	Average
2	5576.750	98.54	-----	-----	74.59	23.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5580MHz
Test By :Gary

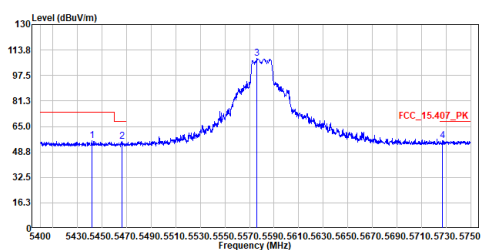

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5441.650	56.02	74.00	-17.98	32.36	23.66	Peak
2	5466.150	55.25	68.20	-12.95	31.58	23.67	Peak
3	5576.050	108.65	-----	-----	84.70	23.95	Peak
4	5727.075	56.16	68.20	-12.04	31.74	24.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5580MHz
Test By :Gary



No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11160.000	51.03	74.00	-22.97	53.34	-2.31	Peak
2	16740.000	53.34	68.20	-14.86	51.62	1.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5580MHz
Test By :Gary

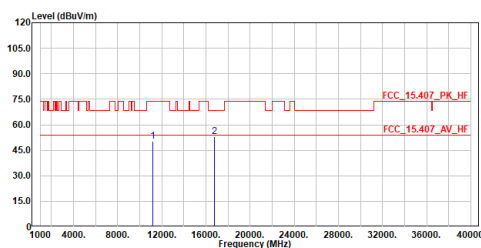

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11160.000	50.33	74.00	-23.67	52.64	-2.31	Peak
2	16740.000	53.06	68.20	-15.14	51.34	1.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5700MHz
Test By :Gary

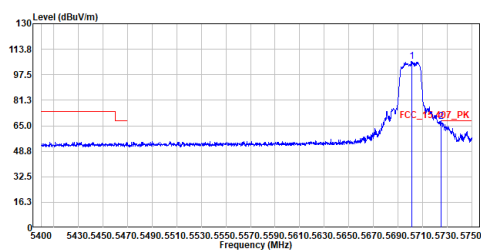


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5701.175	106.00	68.20	-0.37	81.67	24.33	Peak
2	5725.325	67.83	68.20	-0.37	43.41	24.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5700MHz
Test By :Gary

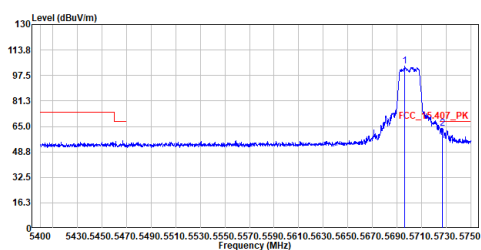


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5696.450	103.52	68.20	-4.31	79.20	24.32	Peak
2	5727.075	63.89	68.20	-4.31	39.47	24.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5700MHz
Test By :Gary

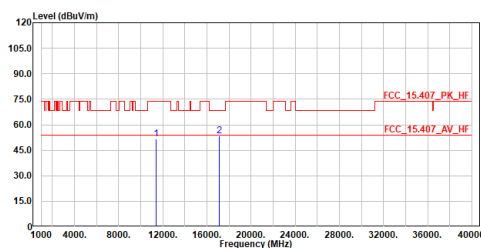


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11400.000	51.57	68.20	-22.43	53.48	-1.91	Peak
2	17100.000	53.53	68.20	-14.67	52.08	1.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5700MHz
Test By :Gary

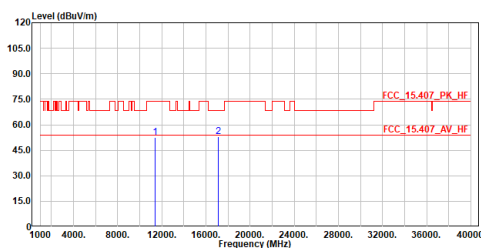


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11400.000	52.60	68.20	-21.40	54.51	-1.91	Peak
2	17100.000	53.21	68.20	-14.99	51.76	1.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5720MHz
Test By :Gary

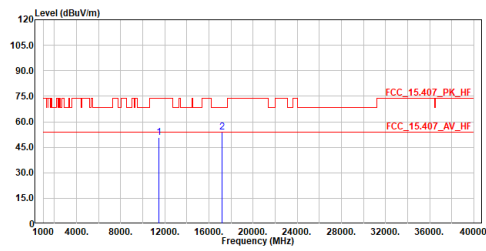


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11440.000	50.90	74.00	-23.10	52.73	-1.83	Peak
2	17160.000	53.83	68.20	-14.37	52.34	1.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5720MHz
Test By :Gary

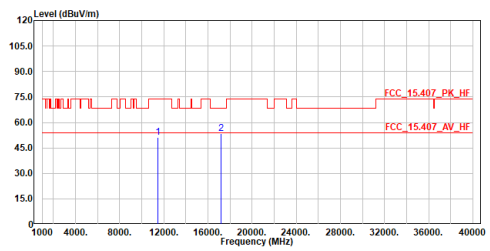


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11440.000	51.30	74.00	-22.70	53.13	-1.83	Peak
2	17160.000	53.57	68.20	-14.63	52.08	1.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5745MHz
Test By :Gary

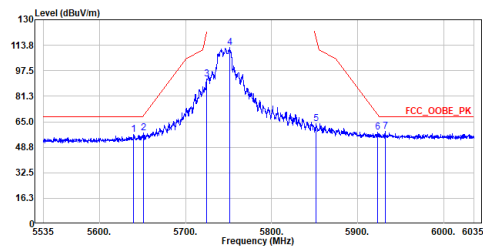


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5640.000	56.68	68.20	-11.52	32.54	24.14	Peak
2	5651.250	57.83	69.13	-11.30	33.66	24.17	Peak
3	5724.750	92.38	121.63	-29.25	67.98	24.40	Peak
4	5751.500	112.40	-----	-----	87.91	24.49	Peak
5	5851.500	63.71	118.78	-55.07	38.90	24.81	Peak
6	5923.000	58.46	69.69	-11.23	33.43	25.03	Peak
7	5932.250	58.95	68.20	-9.25	33.88	25.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5745MHz
Test By :Gary

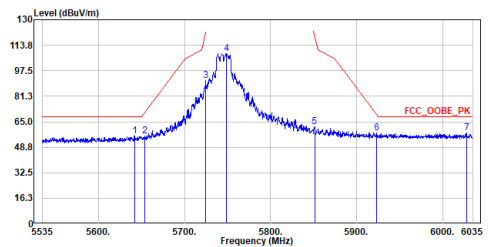


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5642.250	55.89	68.20	-12.31	31.74	24.15	Peak
2	5653.500	55.91	70.80	-14.89	31.72	24.19	Peak
3	5724.750	91.32	121.06	-29.74	66.92	24.40	Peak
4	5748.750	108.34	-----	-----	83.85	24.49	Peak
5	5851.250	61.68	119.35	-57.67	36.87	24.81	Peak
6	5923.250	57.89	69.50	-11.61	32.86	25.03	Peak
7	6027.750	57.94	68.20	-10.26	32.52	25.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5745MHz
Test By :Gary

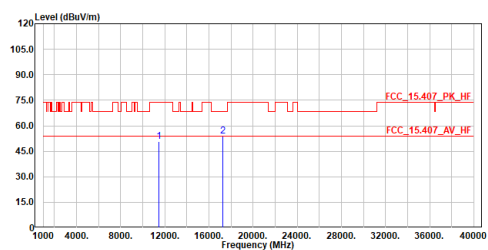


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	50.81	74.00	-23.19	52.56	-1.75	Peak
2	17235.000	53.96	68.20	-14.24	52.42	1.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5745MHz
Test By :Gary

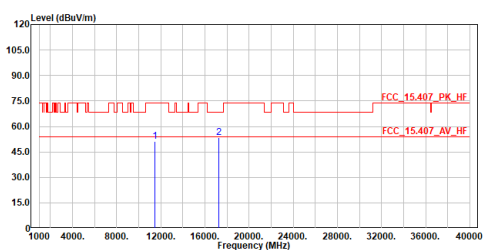


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	50.97	74.00	-23.03	52.72	-1.75	Peak
2	17235.000	53.41	68.20	-14.79	51.87	1.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5785MHz
Test By :Gary

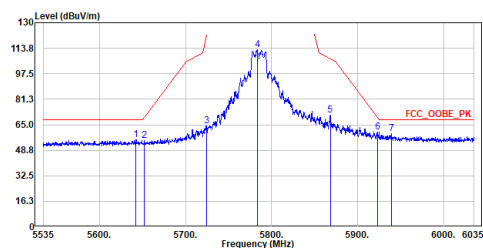


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5642.500	55.46	68.20	-12.74	31.31	24.15	Peak
2	5652.250	55.01	69.87	-14.86	30.84	24.17	Peak
3	5724.250	64.12	120.49	-56.37	39.72	24.40	Peak
4	5783.250	112.66	-----	-----	88.07	24.59	Peak
5	5868.250	71.13	107.09	-35.96	46.27	24.86	Peak
6	5923.250	60.53	69.50	-8.97	35.50	25.03	Peak
7	5939.250	59.12	68.20	-9.08	34.03	25.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5785MHz
Test By :Gary

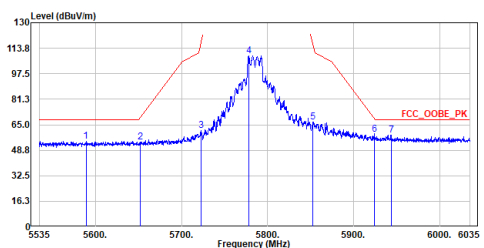


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5589.000	54.55	68.20	-13.65	30.57	23.98	Peak
2	5651.750	53.96	69.50	-15.54	29.79	24.17	Peak
3	5723.000	61.35	117.64	-56.29	36.95	24.40	Peak
4	5778.000	108.97	-----	-----	84.39	24.58	Peak
5	5853.000	66.77	115.36	-48.59	41.95	24.82	Peak
6	5924.000	59.03	68.95	-9.92	34.00	25.03	Peak
7	5943.500	58.31	68.20	-9.89	33.20	25.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5785MHz
Test By :Gary

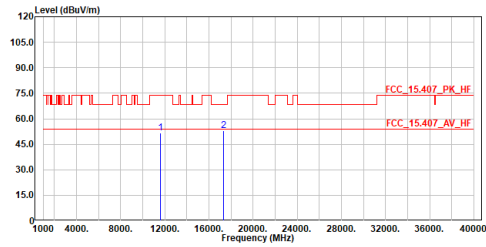


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11570.000	51.44	74.00	-22.56	53.13	-1.69	Peak
2	17355.000	53.05	68.20	-15.15	51.42	1.63	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5785MHz
Test By :Gary

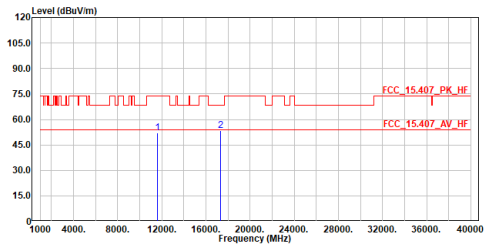


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11570.000	52.28	74.00	-21.72	53.97	-1.69	Peak
2	17355.000	53.26	68.20	-14.94	51.63	1.63	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5825MHz
Test By :Gary

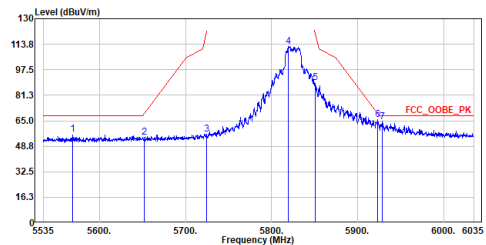


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5568.530	56.24	68.20	-11.96	32.33	23.91	Peak
2	5652.360	54.57	69.87	-15.30	30.40	24.17	Peak
3	5724.830	56.54	121.63	-65.09	32.14	24.40	Peak
4	5819.330	112.56	-----	-----	87.86	24.70	Peak
5	5850.680	89.20	121.63	-32.43	64.39	24.81	Peak
6	5923.530	65.79	69.32	-3.53	48.76	25.03	Peak
7	5928.650	64.41	68.20	-3.79	39.36	25.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5825MHz
Test By :Gary

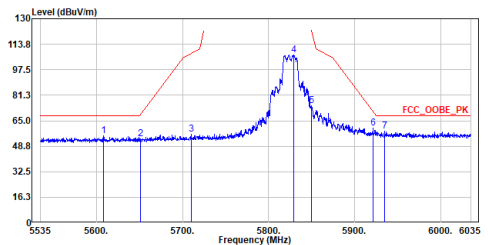


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5608.000	55.49	68.20	-12.71	31.45	24.04	Peak
2	5651.000	53.45	68.95	-15.50	29.28	24.17	Peak
3	5710.000	56.35	108.00	-51.65	31.98	24.37	Peak
4	5829.000	107.15	-----	-----	82.41	24.74	Peak
5	5850.250	74.63	121.63	-47.00	49.82	24.81	Peak
6	5921.500	60.45	70.80	-10.35	35.42	25.03	Peak
7	5935.250	58.51	68.20	-9.69	33.43	25.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :a_TX_5825MHz
Test By :Gary

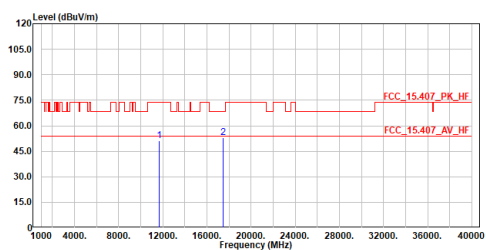

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11650.000	51.03	74.00	-22.97	52.68	-1.65	Peak
2	17475.000	52.82	68.20	-15.38	51.12	1.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :a_TX_5825MHz
Test By :Gary

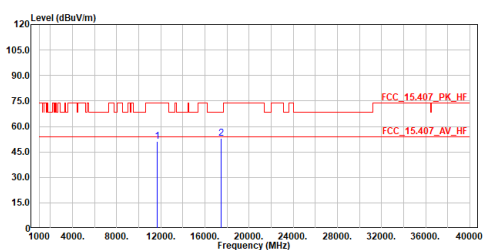

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11650.000	51.26	74.00	-22.74	52.91	-1.65	Peak
2	17475.000	53.10	68.20	-15.10	51.40	1.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5180MHz
Test By :Gary

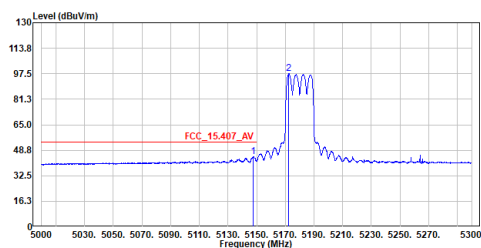

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5147.600	44.44	54.00	-9.56	20.97	23.47	Average
2	5172.500	97.83	-----	-----	74.34	23.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5180MHz
Test By :Gary

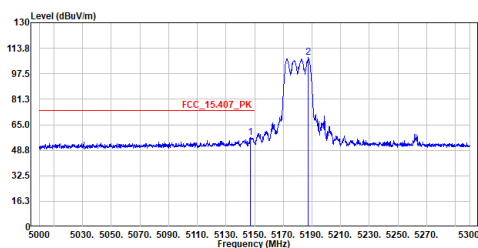

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5147.300	56.92	74.00	-17.08	33.45	23.47	Peak
2	5187.500	107.81	-----	-----	84.31	23.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5180MHz
Test By :Gary

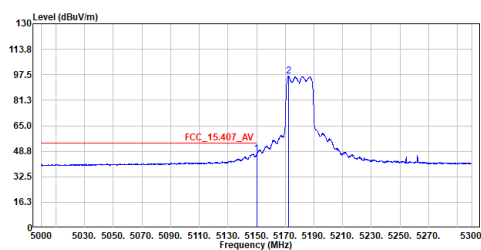

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5150.000	47.06	54.00	-6.94	23.59	23.47	Average
2	5172.500	96.46	-----	-----	72.97	23.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5180MHz
Test By :Gary

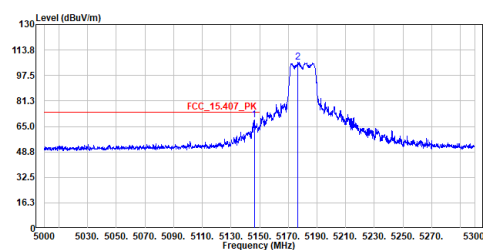

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5146.250	69.05	74.00	-4.95	45.58	23.47	Peak
2	5176.850	105.92	-----	-----	82.43	23.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5180MHz
Test By :Gary

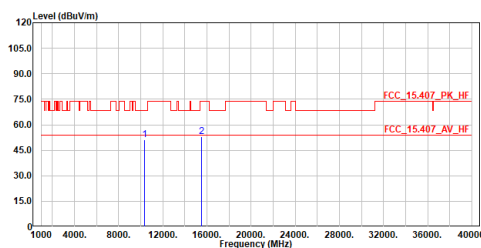

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10360.000	51.18	68.20	-17.02	54.66	-3.48	Peak
2	15540.000	53.18	74.00	-20.82	50.26	2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5180MHz
Test By :Gary

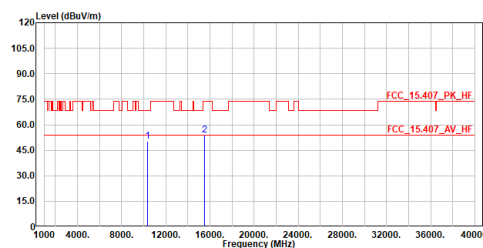

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10360.000	50.46	68.20	-17.74	53.94	-3.48	Peak
2	15540.000	53.82	74.00	-20.18	50.90	2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5220MHz
Test By :Gary

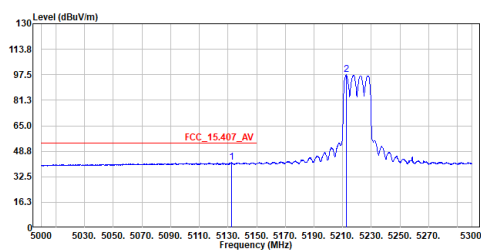

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5132.600	41.50	54.00	-12.50	18.03	23.47	Average
2	5212.550	97.46	-----	-----	73.95	23.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5220MHz
Test By :Gary

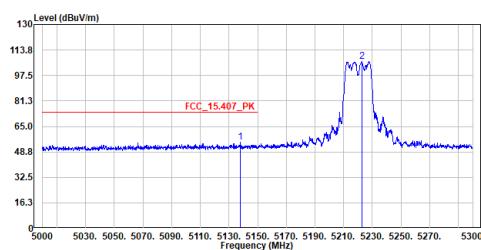

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5138.000	54.79	74.00	-19.21	31.33	23.46	Peak
2	5222.750	106.69	-----	-----	83.17	23.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5220MHz
Test By :Gary

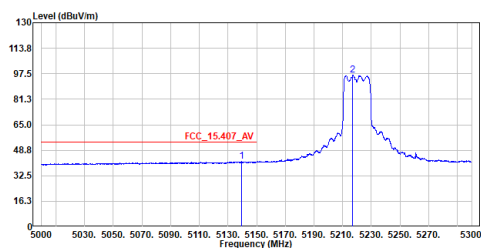

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5139.350	41.48	54.00	-12.52	18.02	23.46	Average
2	5217.050	96.48	-----	-----	72.96	23.52	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5220MHz
Test By :Gary

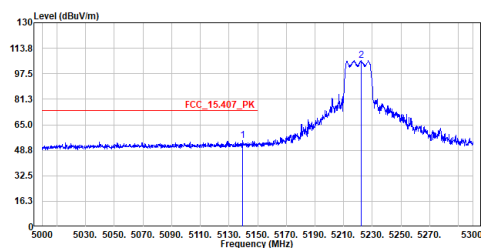

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5139.500	55.07	74.00	-18.93	31.61	23.46	Peak
2	5222.150	106.16	-----	-----	82.64	23.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5220MHz
Test By :Gary

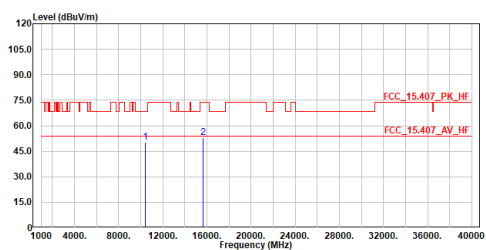

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10440.000	50.23	68.20	-17.97	53.64	-3.41	Peak
2	15660.000	53.09	74.00	-20.91	50.19	2.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5220MHz
Test By :Gary

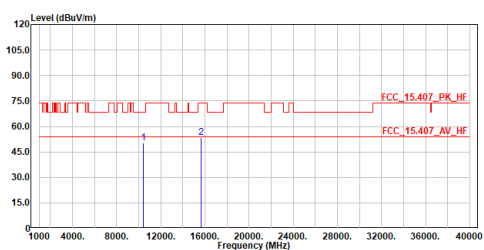

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10440.000	50.09	68.20	-18.11	53.50	-3.41	Peak
2	15660.000	53.39	74.00	-20.61	50.49	2.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5240MHz
Test By :Gary

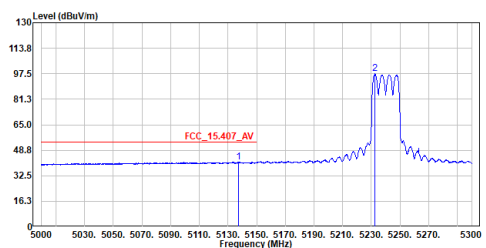

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5137.400	41.30	54.00	-12.70	17.83	23.47	Average
2	5232.500	97.73	-----	-----	74.20	23.53	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5240MHz
Test By :Gary

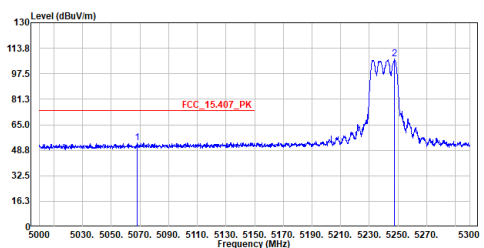

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5068.100	53.69	74.00	-20.31	30.27	23.42	Peak
2	5247.350	106.79	-----	-----	83.26	23.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5240MHz
Test By :Gary

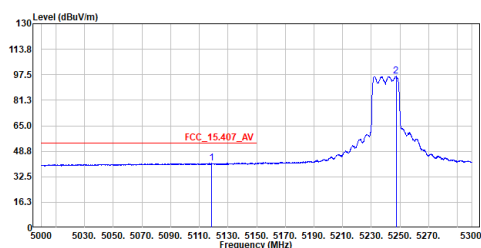

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5118.650	41.30	54.00	-12.70	17.84	23.46	Average
2	5247.200	96.54	-----	-----	73.01	23.53	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5240MHz
Test By :Gary

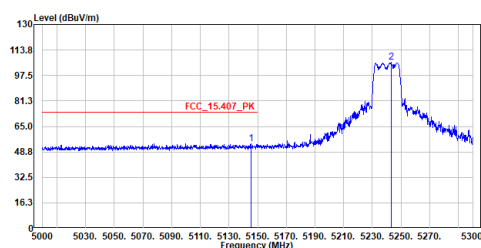

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5145.350	54.02	74.00	-19.98	30.55	23.47	Peak
2	5243.000	105.77	-----	-----	82.24	23.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5240MHz
Test By :Gary

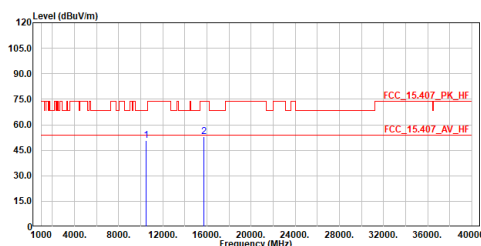

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10480.000	50.91	68.20	-17.29	54.28	-3.37	Peak
2	15720.000	53.08	74.00	-20.92	50.19	2.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5240MHz
Test By :Gary

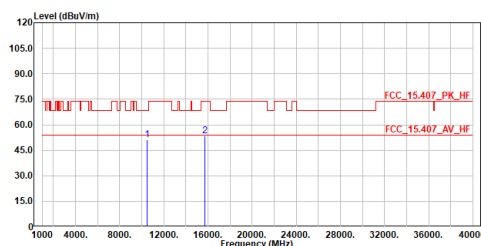

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10480.000	51.28	68.20	-16.92	54.65	-3.37	Peak
2	15720.000	53.31	74.00	-20.69	50.42	2.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5260MHz
Test By :Gary

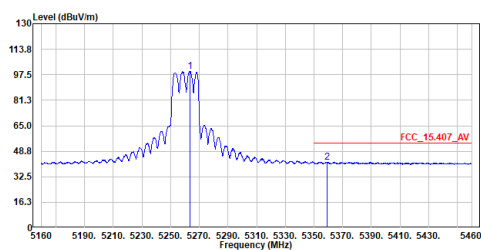

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5263.800	99.79	-----	-----	76.24	23.55	Average
2	5359.350	41.94	54.00	-12.06	18.32	23.62	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5260MHz
Test By :Gary

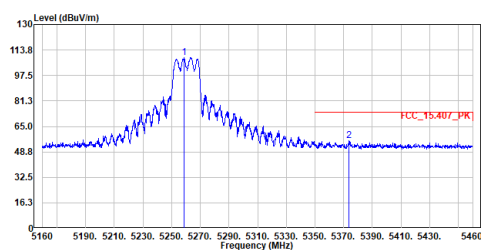

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5258.850	108.88	-----	-----	85.33	23.55	Peak
2	5373.600	56.00	74.00	-18.00	32.38	23.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5260MHz
Test By :Gary

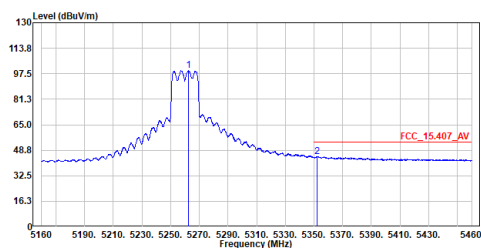

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5262.450	99.49	-----	-----	75.94	23.55	Average
2	5352.000	44.74	54.00	-9.26	21.13	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5260MHz
Test By :Gary

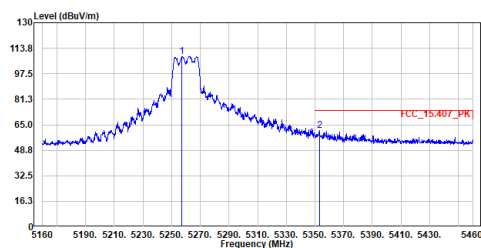

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5257.050	108.55	-----	-----	85.00	23.55	Peak
2	5353.050	61.29	74.00	-12.71	37.68	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5260MHz
Test By :Gary

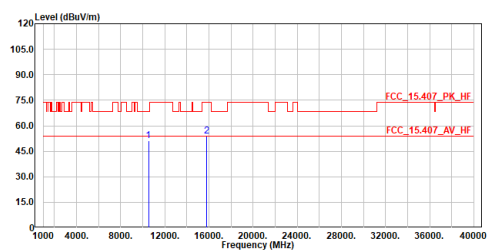

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10520.000	50.97	68.20	-17.23	54.30	-3.33	Peak
2	15780.000	53.81	74.00	-20.19	50.93	2.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5260MHz
Test By :Gary

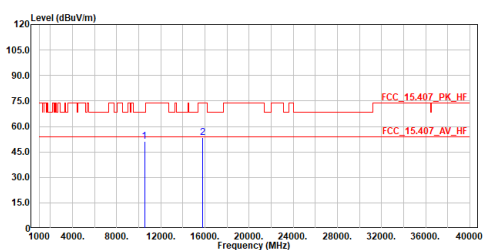

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10520.000	51.21	68.20	-16.99	54.54	-3.33	Peak
2	15780.000	53.57	74.00	-20.43	50.69	2.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5300MHz
Test By :Gary

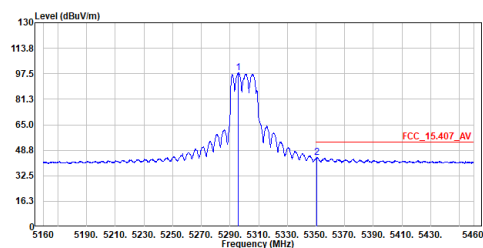

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5295.750	98.13	-----	-----	74.56	23.57	Average
2	5350.350	44.19	54.00	-9.81	20.58	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5300MHz
Test By :Gary

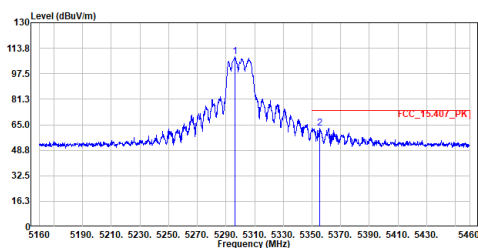

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5296.200	108.18	-----	-----	84.61	23.57	Peak
2	5355.300	62.83	74.00	-11.17	39.22	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5300MHz
Test By :Gary

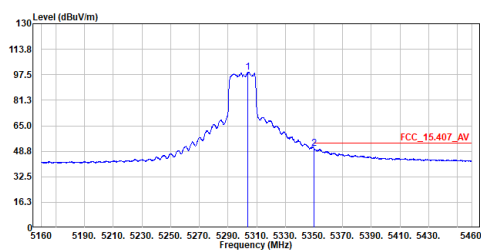

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5303.700	99.03	-----	-----	75.46	23.57	Average
2	5350.010	50.61	54.00	-3.39	27.00	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5300MHz
Test By :Gary

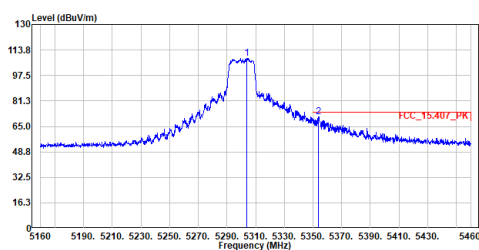

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5303.700	108.58	-----	-----	85.01	23.57	Peak
2	5353.950	71.02	74.00	-2.98	47.41	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5300MHz
Test By :Gary

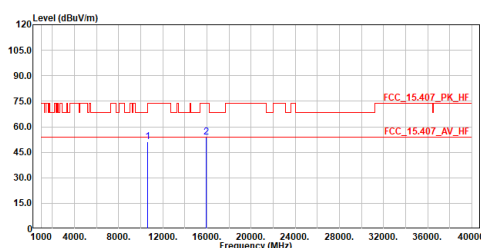

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10600.000	51.06	74.00	-22.94	54.27	-3.21	Peak
2	15900.000	53.95	74.00	-20.05	51.09	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5300MHz
Test By :Gary

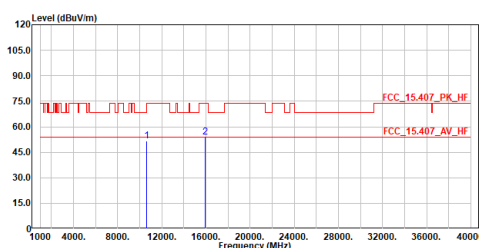

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10600.000	51.74	74.00	-22.26	54.95	-3.21	Peak
2	15900.000	53.86	74.00	-20.14	51.00	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5320MHz
Test By :Gary

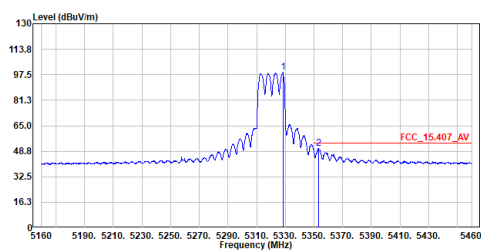

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5328.300	98.93	-----	-----	75.34	23.59	Average
2	5353.050	50.40	54.00	-3.60	26.79	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5320MHz
Test By :Gary

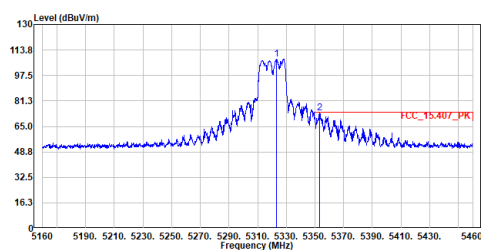

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5323.200	107.95	-----	-----	84.36	23.59	Peak
2	5353.200	73.36	74.00	-0.64	49.75	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5320MHz
Test By :Gary

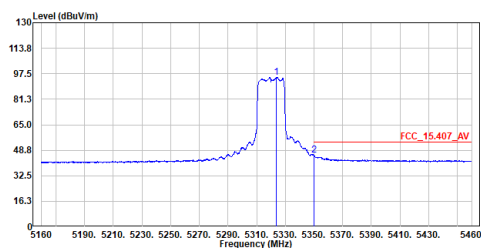

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5323.800	95.34	-----	-----	71.75	23.59	Average
2	5350.010	45.67	54.00	-8.33	22.06	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5320MHz
Test By :Gary

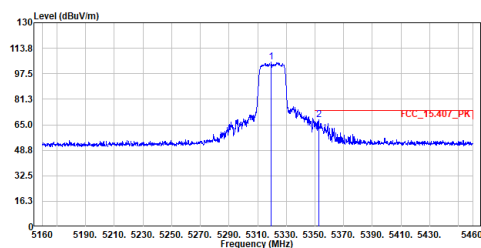

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5319.300	104.87	-----	-----	81.28	23.59	Peak
2	5352.450	68.23	74.00	-5.77	44.62	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5320MHz
Test By :Gary




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10640.000	50.69	74.00	-23.31	53.83	-3.14	Peak
2	15960.000	53.51	74.00	-20.49	50.66	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5320MHz
Test By :Gary

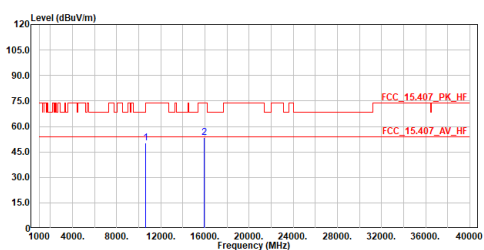


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10640.000	50.24	74.00	-23.76	53.38	-3.14	Peak
2	15960.000	53.28	74.00	-20.72	50.43	2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5500MHz
Test By :Gary

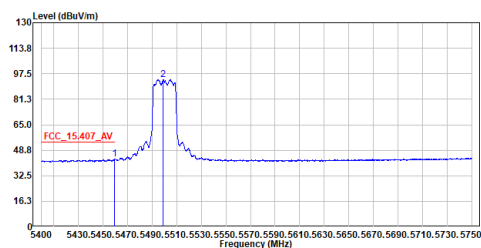


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5459.675	43.08	54.00	-10.92	19.40	23.68	Average
2	5499.050	93.94	-----	-----	70.24	23.70	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5500MHz
Test By :Gary

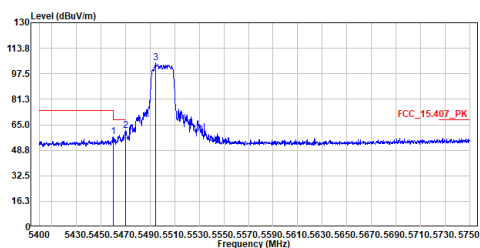


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5459.850	57.49	74.00	-16.51	33.81	23.68	Peak
2	5470.000	61.38	68.20	-6.82	37.70	23.68	Peak
3	5494.675	104.59	-----	-----	80.89	23.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5500MHz
Test By :Gary

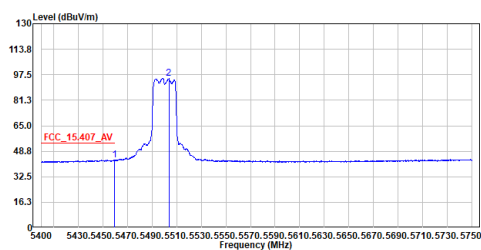


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5459.150	43.20	54.00	-10.80	19.52	23.68	Average
2	5503.600	95.20	-----	-----	71.49	23.71	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5500MHz
Test By :Gary

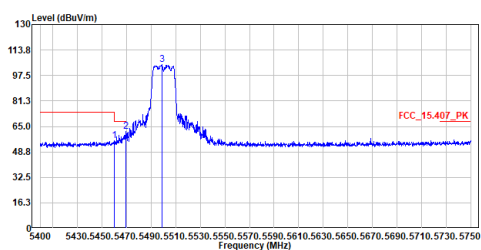


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5459.850	55.74	74.00	-18.26	32.06	23.68	Peak
2	5469.300	61.68	68.20	-6.52	38.00	23.68	Peak
3	5498.875	104.35	-----	-----	80.65	23.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5500MHz
Test By :Gary

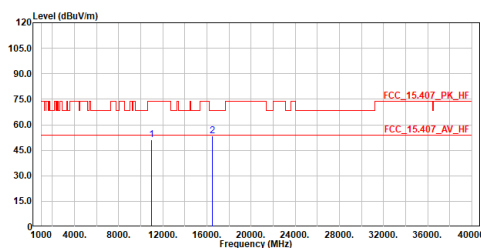


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11000.000	51.28	74.00	-22.72	53.85	-2.57	Peak
2	16500.000	53.53	68.20	-14.67	51.49	2.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5500MHz
Test By :Gary

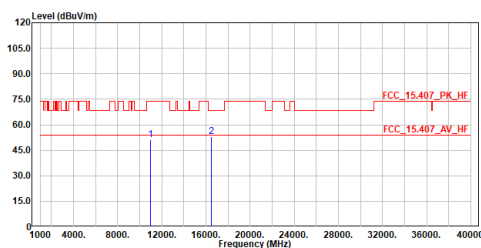


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11000.000	51.24	74.00	-22.76	53.81	-2.57	Peak
2	16500.000	53.07	68.20	-15.13	51.03	2.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5580MHz
Test By :Gary

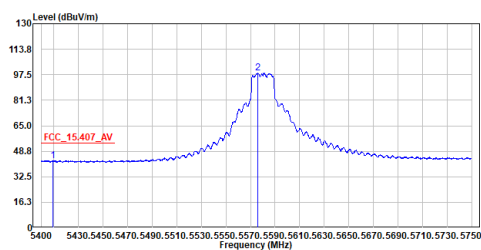

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5409.100	42.90	54.00	-11.10	19.26	23.64	Average
2	5576.050	98.72	-----	-----	74.77	23.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5580MHz
Test By :Gary

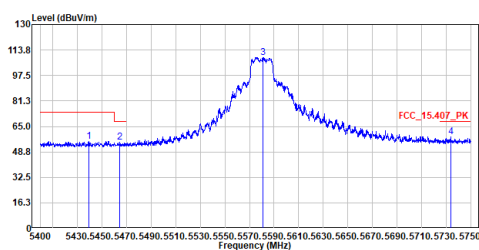

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5439.375	55.61	74.00	-18.39	31.95	23.66	Peak
2	5464.400	54.86	68.20	-13.34	31.19	23.67	Peak
3	5580.775	108.98	-----	-----	85.02	23.96	Peak
4	5733.725	58.54	68.20	-9.66	34.11	24.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5580MHz
Test By :Gary

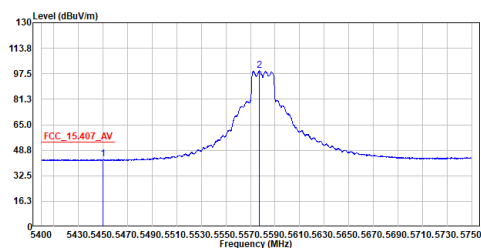

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5450.225	42.94	54.00	-11.06	19.27	23.67	Average
2	5577.275	99.41	-----	-----	75.46	23.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5580MHz
Test By :Gary

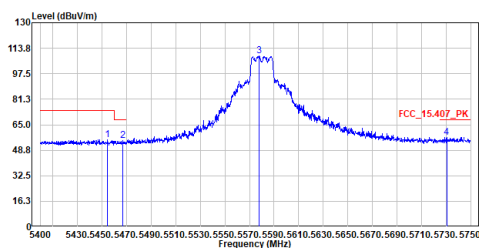

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5454.425	55.58	74.00	-18.42	31.90	23.68	Peak
2	5467.025	54.77	68.20	-13.43	31.09	23.68	Peak
3	5577.625	108.73	-----	-----	84.78	23.95	Peak
4	5730.400	57.12	68.20	-11.08	32.69	24.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5580MHz
Test By :Gary




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11160.000	50.25	74.00	-23.75	52.56	-2.31	Peak
2	16740.000	53.62	68.20	-14.58	51.90	1.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5580MHz
Test By :Gary

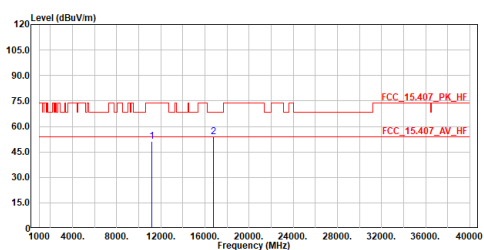


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11160.000	51.10	74.00	-22.90	53.41	-2.31	Peak
2	16740.000	53.82	68.20	-14.38	52.10	1.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5700MHz
Test By :Gary

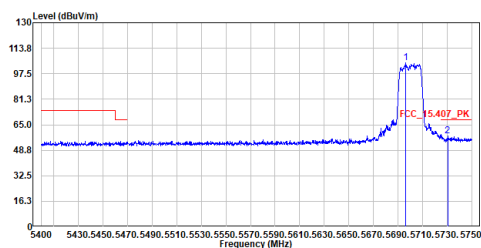


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5696.100	104.63	-----	-----	80.31	24.32	Peak
2	5730.400	58.04	68.20	-10.16	33.61	24.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5700MHz
Test By :Gary

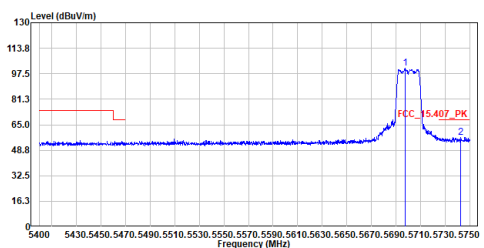


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5697.675	100.97	-----	-----	76.65	24.32	Peak
2	5742.825	57.06	68.20	-11.14	32.59	24.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5700MHz
Test By :Gary

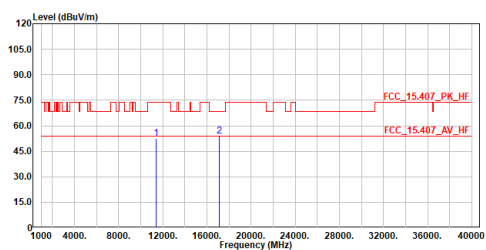

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11400.000	52.32	74.00	-21.68	54.23	-1.91	Peak
2	17100.000	53.72	68.20	-14.48	52.27	1.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5700MHz
Test By :Gary

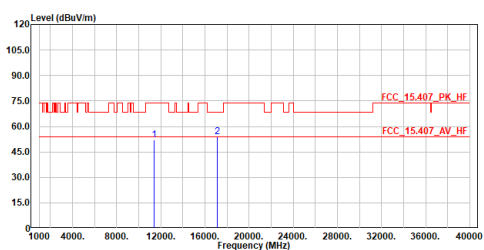

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11400.000	51.91	74.00	-22.09	53.82	-1.91	Peak
2	17100.000	53.67	68.20	-14.53	52.22	1.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5720MHz
Test By :Gary

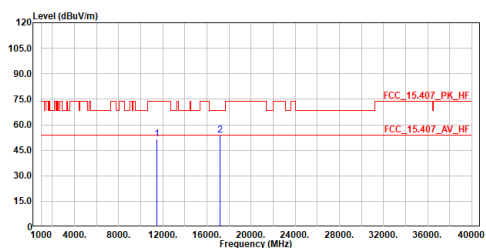

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11440.000	51.81	74.00	-22.19	53.64	-1.83	Peak
2	17160.000	53.99	68.20	-14.21	52.50	1.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5720MHz
Test By :Gary

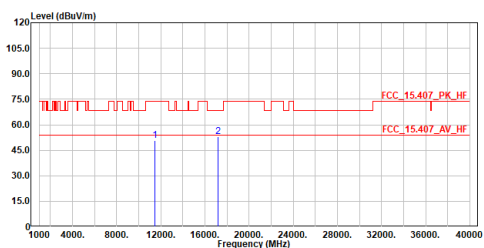

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11440.000	50.84	74.00	-23.16	52.67	-1.83	Peak
2	17160.000	53.17	68.20	-15.03	51.68	1.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5745MHz
Test By :Gary

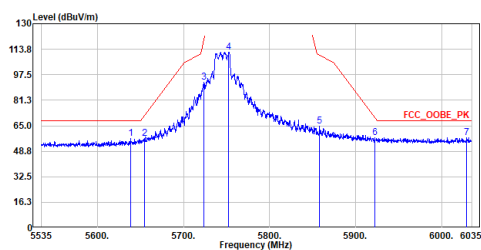

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5638.500	56.90	68.20	-11.30	32.77	24.13	Peak
2	5654.750	56.88	71.72	-14.84	32.69	24.19	Peak
3	5723.500	92.82	118.78	-25.96	68.42	24.40	Peak
4	5752.750	111.84	-----	-----	87.34	24.50	Peak
5	5858.000	64.84	109.96	-45.12	40.01	24.83	Peak
6	5922.500	57.29	70.06	-12.77	32.26	25.03	Peak
7	6029.250	57.35	68.20	-10.85	31.92	25.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5745MHz
Test By :Gary

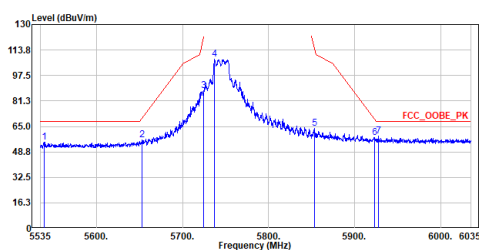

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5539.750	55.01	68.20	-13.19	31.19	23.82	Peak
2	5653.250	56.27	70.61	-14.34	32.08	24.19	Peak
3	5724.750	87.83	121.63	-33.80	63.43	24.40	Peak
4	5737.250	107.73	-----	-----	83.28	24.45	Peak
5	5853.500	63.90	114.22	-50.32	39.08	24.82	Peak
6	5923.250	57.94	69.50	-11.56	32.91	25.03	Peak
7	5928.000	58.87	68.20	-9.33	33.82	25.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5745MHz
Test By :Gary

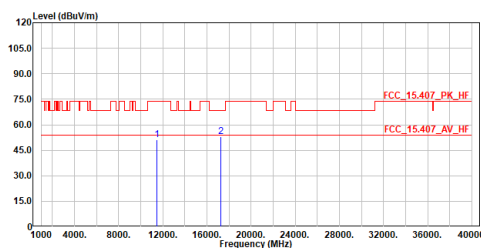

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	51.16	74.00	-22.84	52.91	-1.75	Peak
2	17235.000	53.02	68.20	-15.18	51.48	1.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5745MHz
Test By :Gary

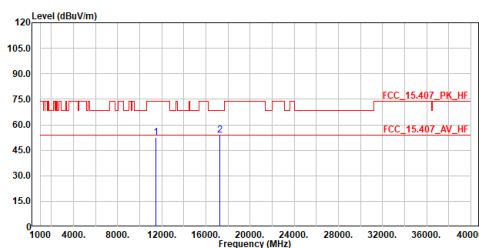

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	52.50	74.00	-21.50	54.25	-1.75	Peak
2	17235.000	53.88	68.20	-14.32	52.34	1.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5785MHz
Test By :Gary

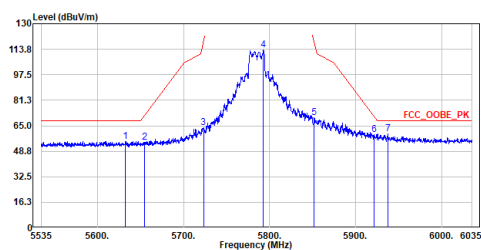


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5632.750	55.18	68.20	-13.02	31.06	24.12	Peak
2	5654.750	54.55	71.72	-17.17	30.36	24.19	Peak
3	5723.250	63.93	118.21	-54.28	39.53	24.40	Peak
4	5792.750	113.18	-----	-----	88.55	24.63	Peak
5	5852.000	70.17	117.64	-47.47	45.36	24.81	Peak
6	5921.500	59.40	70.80	-11.40	34.37	25.03	Peak
7	5937.750	59.67	68.20	-8.53	34.59	25.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5785MHz
Test By :Gary

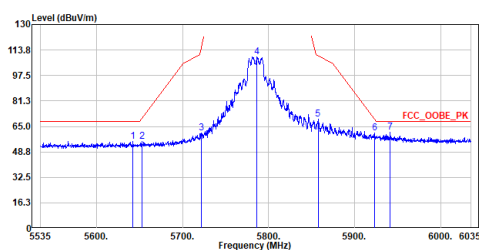


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5642.500	55.31	68.20	-12.89	31.16	24.15	Peak
2	5652.750	55.51	70.24	-14.73	31.33	24.18	Peak
3	5721.750	60.77	114.79	-54.02	36.37	24.40	Peak
4	5786.750	109.45	-----	-----	84.85	24.60	Peak
5	5857.500	69.50	110.10	-40.60	44.67	24.83	Peak
6	5923.500	60.64	69.32	-8.68	35.61	25.03	Peak
7	5941.250	61.10	68.20	-7.10	36.01	25.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5785MHz
Test By :Gary

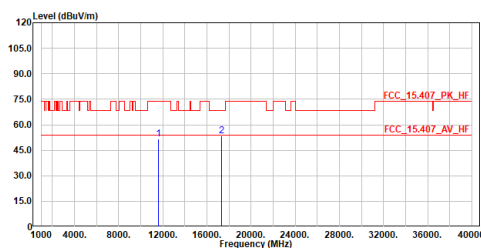


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	51.60	74.00	-22.40	53.29	-1.69	Peak
2	17355.000	53.22	68.20	-14.98	51.59	1.63	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5785MHz
Test By :Gary

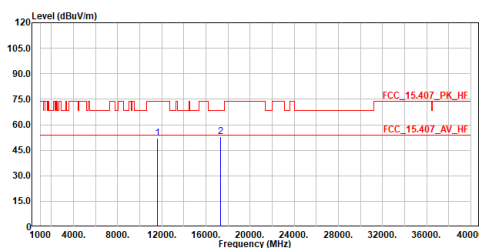


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	51.90	74.00	-22.10	53.59	-1.69	Peak
2	17355.000	53.10	68.20	-15.10	51.47	1.63	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5825MHz
Test By :Gary

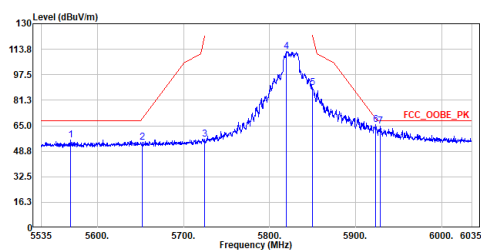


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5568.500	56.06	68.20	-12.14	32.15	23.91	Peak
2	5652.250	54.33	69.87	-15.54	30.16	24.17	Peak
3	5724.750	56.62	121.63	-65.01	32.22	24.40	Peak
4	5819.250	112.40	-----	-----	87.70	24.70	Peak
5	5850.250	89.06	121.63	-32.57	64.25	24.81	Peak
6	5923.500	65.90	69.32	-3.42	48.87	25.03	Peak
7	5928.750	64.56	68.20	-3.64	39.51	25.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5825MHz
Test By :Gary

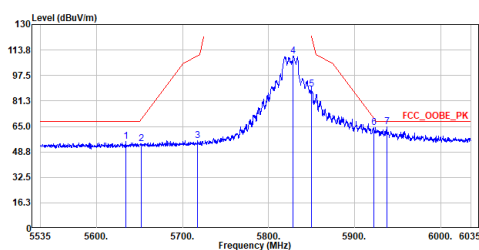


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5634.000	55.24	68.20	-12.96	31.12	24.12	Peak
2	5652.500	53.97	70.06	-16.09	29.79	24.18	Peak
3	5717.500	55.80	110.10	-54.30	31.41	24.39	Peak
4	5828.500	110.02	-----	-----	85.28	24.74	Peak
5	5850.000	88.92	122.20	-33.28	64.11	24.81	Peak
6	5922.250	64.38	70.24	-5.86	39.35	25.03	Peak
7	5937.500	64.56	68.20	-3.64	39.48	25.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac20_TX_5825MHz
Test By :Gary

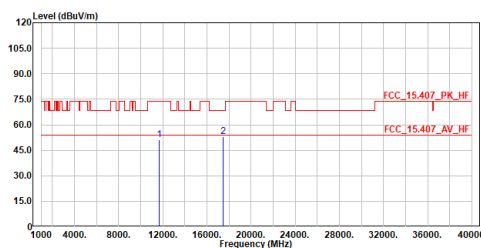


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	51.05	74.00	-22.95	52.70	-1.65	Peak
2	17475.000	52.88	68.20	-15.32	51.18	1.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac20_TX_5825MHz
Test By :Gary

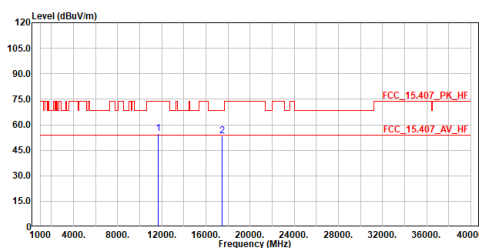


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	54.92	74.00	-19.08	56.57	-1.65	Peak
2	17475.000	53.49	68.20	-14.71	51.79	1.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5190MHz
Test By :Gary

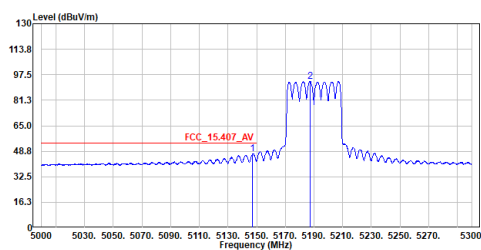

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.300	47.24	54.00	-6.76	23.77	23.47	Average
2	5187.500	93.25	-----	-----	69.75	23.50	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5190MHz
Test By :Gary

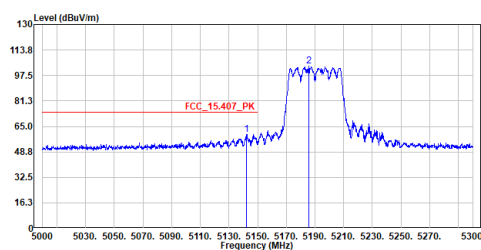

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5142.350	59.87	74.00	-14.13	36.40	23.47	Peak
2	5185.850	103.37	-----	-----	79.86	23.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5190MHz
Test By :Gary

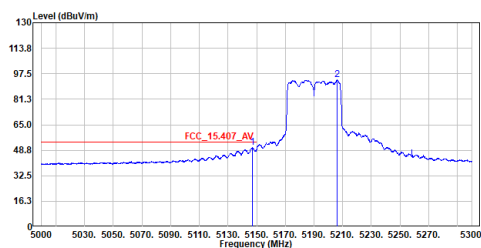

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.300	50.42	54.00	-3.58	26.95	23.47	Average
2	5205.950	93.59	-----	-----	70.08	23.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5190MHz
Test By :Gary

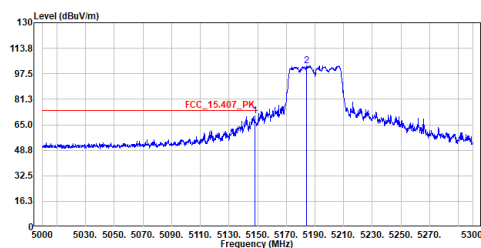

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.200	70.76	74.00	-3.24	47.29	23.47	Peak
2	5184.350	102.70	-----	-----	79.19	23.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5190MHz
Test By :Gary

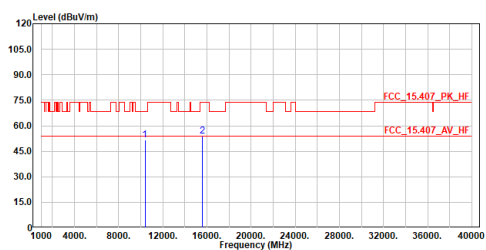


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10380.000	51.51	68.20	-16.69	54.97	-3.46	Peak
2	15570.000	53.91	74.00	-20.09	50.99	2.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5190MHz
Test By :Gary

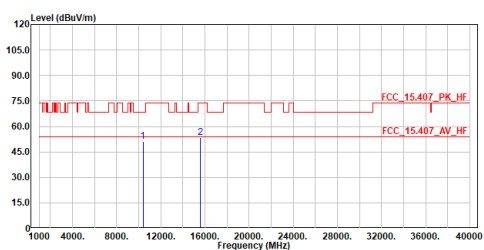


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10380.000	50.95	68.20	-17.25	54.41	-3.46	Peak
2	15570.000	53.37	74.00	-20.63	50.45	2.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5230MHz
Test By :Gary

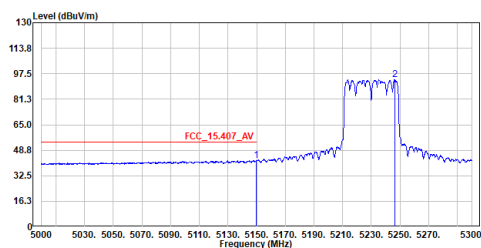


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5149.850	42.35	54.00	-11.65	18.88	23.47	Average
2	5246.300	93.68	-----	-----	70.15	23.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5230MHz
Test By :Gary

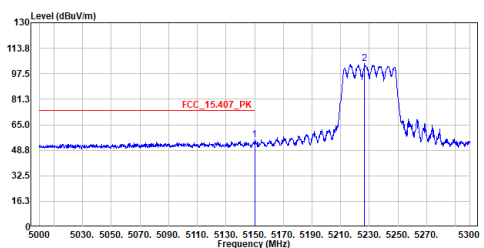


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5150.000	55.19	74.00	-18.81	31.72	23.47	Peak
2	5226.650	103.84	-----	-----	80.31	23.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5230MHz
Test By :Gary

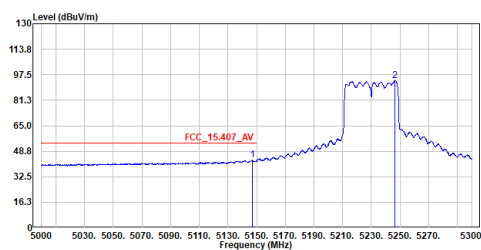


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5146.850	43.17	54.00	-10.83	19.70	23.47	Average
2	5246.450	93.93	-----	-----	70.40	23.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5230MHz
Test By :Gary

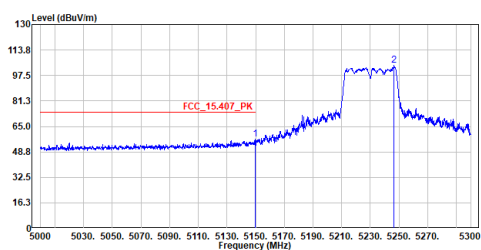


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5149.550	57.14	74.00	-16.86	33.67	23.47	Peak
2	5246.600	104.24	-----	-----	80.71	23.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5230MHz
Test By :Gary

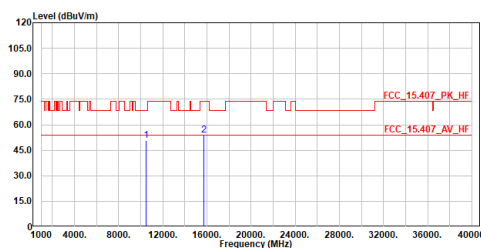


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10460.000	50.50	68.20	-17.70	53.90	-3.40	Peak
2	15690.000	53.92	74.00	-20.08	51.02	2.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5230MHz
Test By :Gary

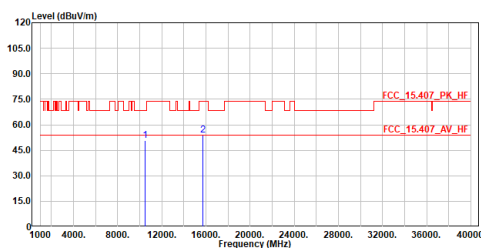


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10460.000	50.79	68.20	-17.41	54.19	-3.40	Peak
2	15690.000	53.86	74.00	-20.14	50.96	2.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5270MHz
Test By :Gary

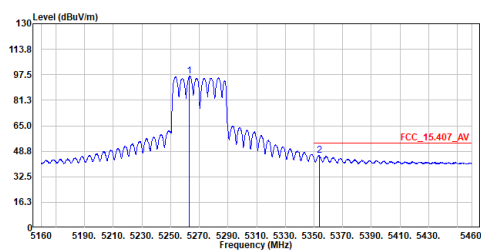

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5263.050	96.43	-----	-----	72.89	23.54	Average
2	5353.650	46.12	54.00	-7.88	22.51	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5270MHz
Test By :Gary

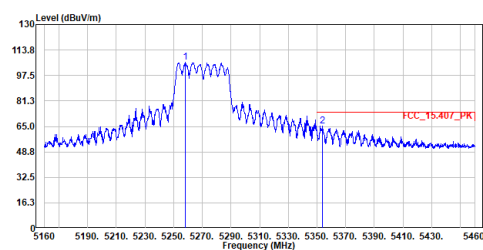

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5258.100	105.79	-----	-----	82.24	23.55	Peak
2	5353.650	65.42	74.00	-8.58	41.81	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5270MHz
Test By :Gary

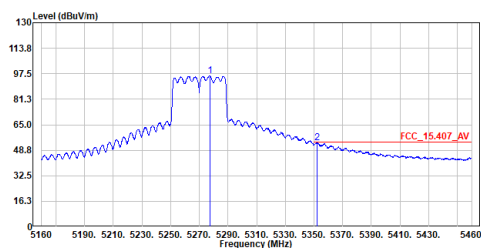

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5277.450	96.32	-----	-----	72.76	23.56	Average
2	5352.000	53.64	54.00	-0.36	30.03	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5270MHz
Test By :Gary

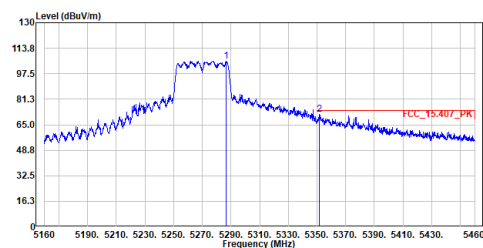

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5286.750	105.58	-----	-----	82.01	23.57	Peak
2	5351.850	71.55	74.00	-2.45	47.94	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5270MHz
Test By :Gary

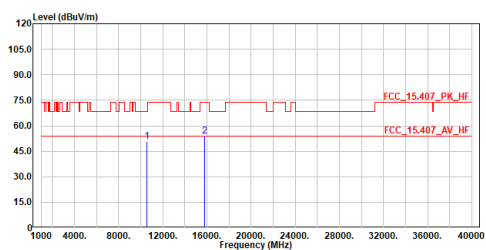


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10540.000	50.80	68.20	-17.40	54.10	-3.30	Peak
2	15810.000	53.86	74.00	-20.14	50.98	2.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5270MHz
Test By :Gary

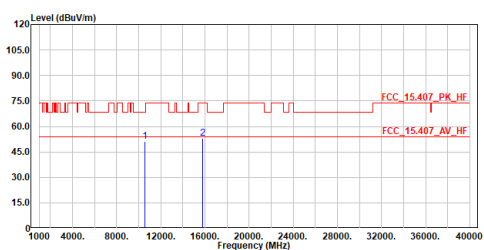


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10540.000	51.22	68.20	-16.98	54.52	-3.30	Peak
2	15810.000	53.19	74.00	-20.81	50.31	2.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5310MHz
Test By :Gary

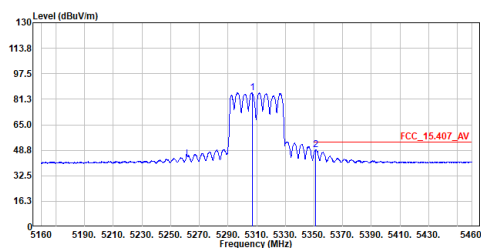


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5307.000	85.41	-----	-----	61.83	23.58	Average
2	5350.950	49.26	54.00	-4.74	25.65	23.61	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5310MHz
Test By :Gary

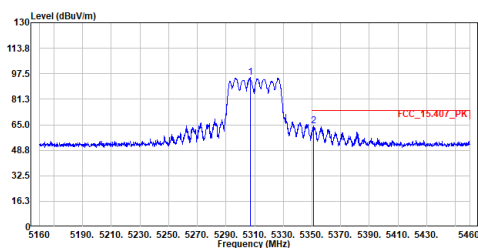


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5307.000	95.26	-----	-----	71.68	23.58	Peak
2	5351.100	64.51	74.00	-9.49	40.90	23.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5310MHz
Test By :Gary

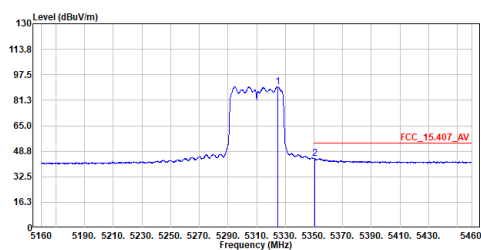


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5324.550	89.97	-----	-----	66.38	23.59	Average
2	5350.350	44.15	54.00	-9.85	20.54	23.61	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5310MHz
Test By :Gary

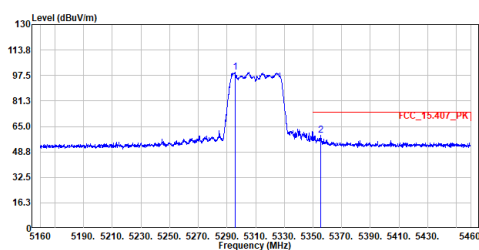


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5295.600	99.57	-----	-----	76.00	23.57	Peak
2	5355.600	59.40	74.00	-14.60	35.79	23.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5310MHz
Test By :Gary

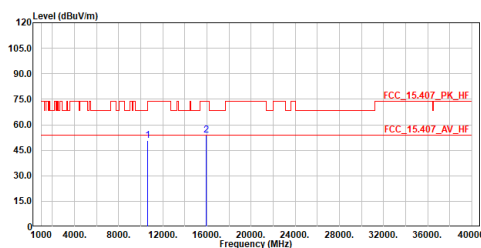


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10620.000	50.73	74.00	-23.27	53.90	-3.17	Peak
2	15930.000	53.73	74.00	-20.27	50.87	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5310MHz
Test By :Gary

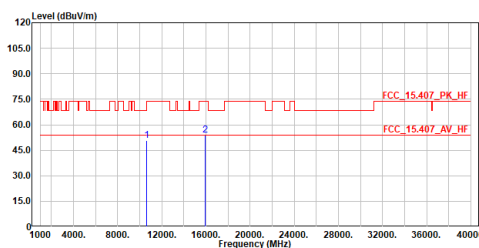


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	10620.000	50.80	74.00	-23.20	53.97	-3.17	Peak
2	15930.000	53.68	74.00	-20.32	50.82	2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5510MHz
Test By :Gary

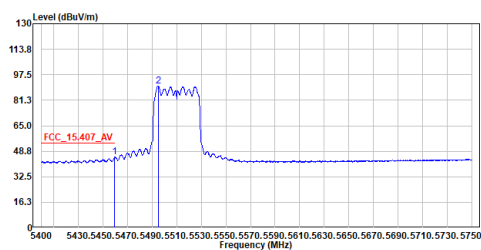

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.500	44.91	54.00	-9.09	21.23	23.68	Average
2	5495.025	90.47	-----	-----	66.77	23.70	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5510MHz
Test By :Gary

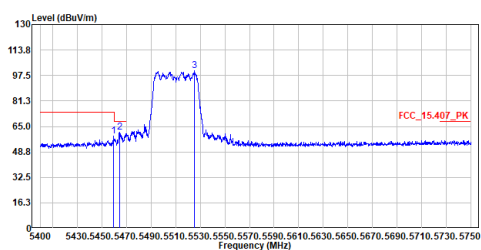

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.500	58.78	74.00	-15.22	35.10	23.68	Peak
2	5464.225	61.18	68.20	-7.02	37.51	23.67	Peak
3	5525.300	100.40	-----	-----	76.61	23.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5510MHz
Test By :Gary

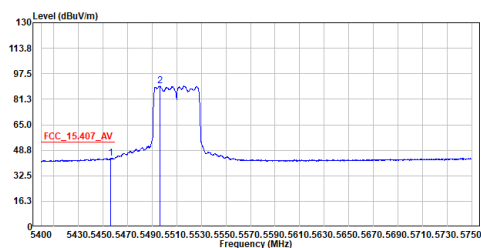

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5456.350	43.56	54.00	-10.44	19.88	23.68	Average
2	5496.425	89.60	-----	-----	65.90	23.70	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5510MHz
Test By :Gary

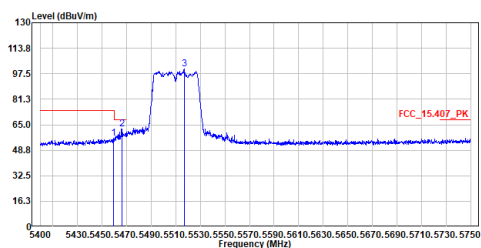

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.325	56.44	74.00	-17.56	32.76	23.68	Peak
2	5466.150	62.35	68.20	-5.85	38.68	23.67	Peak
3	5516.900	100.39	-----	-----	76.63	23.76	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5510MHz
Test By :Gary

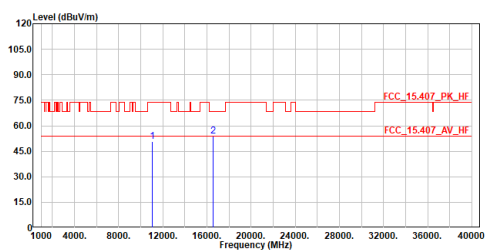


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11020.000	50.74	74.00	-23.26	53.28	-2.54	Peak
2	16530.000	53.90	68.20	-14.30	51.90	2.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5510MHz
Test By :Gary

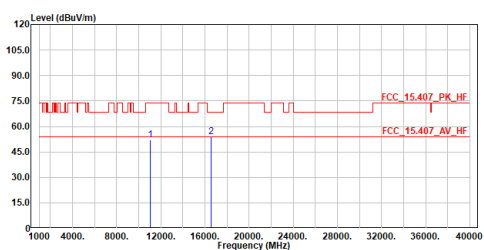


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11020.000	52.11	74.00	-21.89	54.65	-2.54	Peak
2	16530.000	53.68	68.20	-14.52	51.68	2.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5550MHz
Test By :Gary

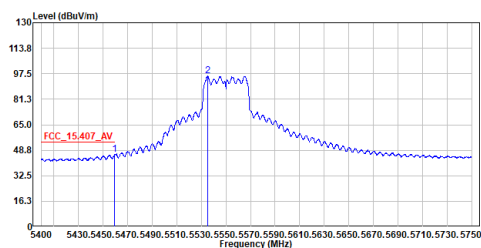


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.675	46.16	54.00	-7.84	22.48	23.68	Average
2	5535.275	95.93	-----	-----	72.12	23.81	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5550MHz
Test By :Gary

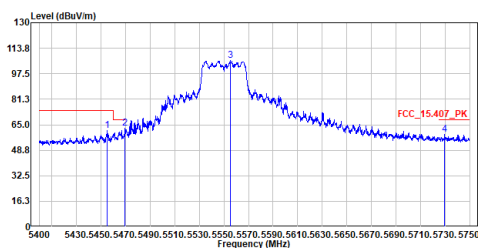


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5454.950	61.11	74.00	-12.89	37.43	23.68	Peak
2	5469.300	62.78	68.20	-5.42	39.10	23.68	Peak
3	5555.050	106.00	-----	-----	82.13	23.87	Peak
4	5729.700	58.79	68.20	-9.41	34.36	24.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5550MHz
Test By :Gary

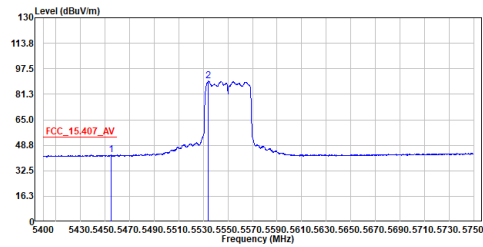

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5454.775	42.51	54.00	-11.49	18.83	23.68	Average
2	5534.225	89.73	-----	-----	65.92	23.81	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5550MHz
Test By :Gary

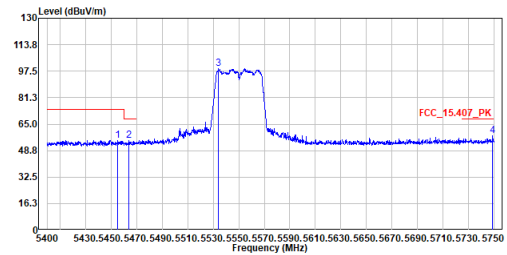

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5455.300	55.00	74.00	-19.00	31.32	23.68	Peak
2	5464.050	54.95	68.20	-13.25	31.28	23.67	Peak
3	5534.050	99.30	-----	-----	75.50	23.80	Peak
4	5749.125	57.82	68.20	-10.38	33.33	24.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5550MHz
Test By :Gary

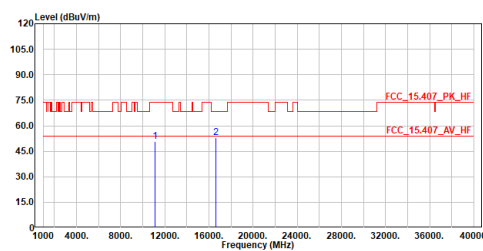

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11100.000	50.93	74.00	-23.07	53.33	-2.40	Peak
2	16650.000	53.13	68.20	-15.07	51.29	1.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5550MHz
Test By :Gary

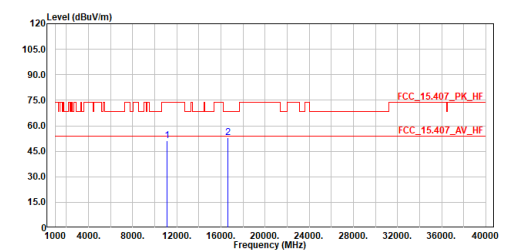

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11100.000	51.13	74.00	-22.87	53.53	-2.40	Peak
2	16650.000	53.00	68.20	-15.20	51.16	1.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5670MHz
Test By :Gary

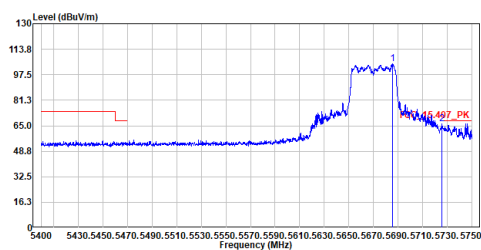


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dBuV	dB	
1	5685.425	104.31	-----	-----	80.02	24.29	Peak
2	5725.500	66.46	68.20	-1.74	42.04	24.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5670MHz
Test By :Gary

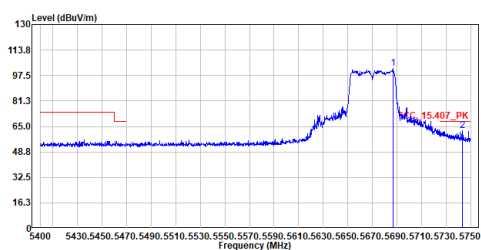


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dBuV	dB	
1	5686.650	101.80	-----	-----	77.51	24.29	Peak
2	5743.000	62.07	68.20	-6.13	37.60	24.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5670MHz
Test By :Gary

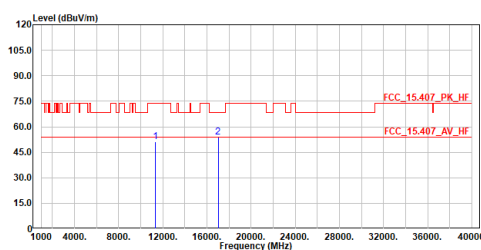


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dBuV	dB	
1	11340.000	51.37	74.00	-22.63	53.37	-2.00	Peak
2	17010.000	53.66	68.20	-14.54	52.28	1.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5670MHz
Test By :Gary

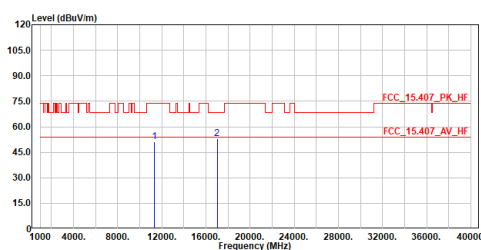


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dBuV	dB	
1	11340.000	51.07	74.00	-22.93	53.07	-2.00	Peak
2	17010.000	53.13	68.20	-15.07	51.75	1.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5710MHz
Test By :Gary

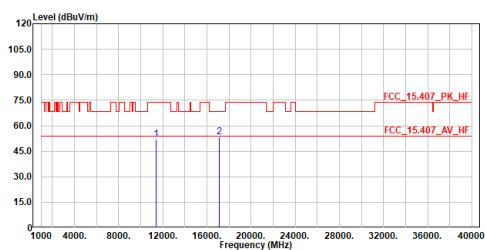


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11420.000	52.22	74.00	-21.78	54.10	-1.88	Peak
2	17130.000	53.66	68.20	-14.54	52.19	1.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5710MHz
Test By :Gary

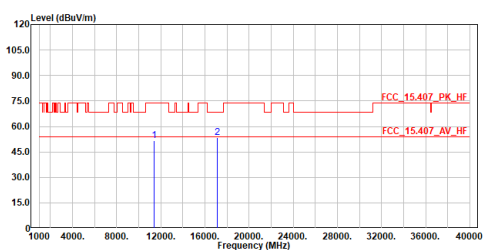


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11420.000	51.59	74.00	-22.41	53.47	-1.88	Peak
2	17130.000	53.58	68.20	-14.62	52.11	1.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5755MHz
Test By :Gary

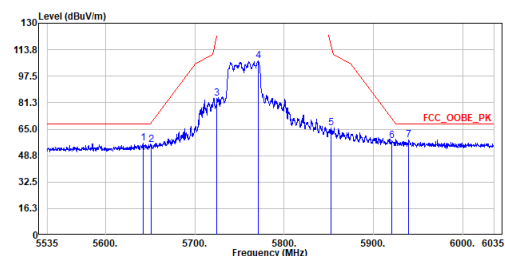


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5642.000	56.28	68.20	-11.92	32.13	24.15	Peak
2	5651.250	55.30	69.13	-13.83	31.13	24.17	Peak
3	5724.500	84.00	121.06	-37.06	59.60	24.40	Peak
4	5771.000	107.16	-----	-----	82.60	24.56	Peak
5	5853.000	65.89	115.36	-49.47	41.07	24.82	Peak
6	5920.500	57.87	71.54	-13.67	32.84	25.03	Peak
7	5939.750	58.33	68.20	-9.87	33.24	25.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5755MHz
Test By :Gary

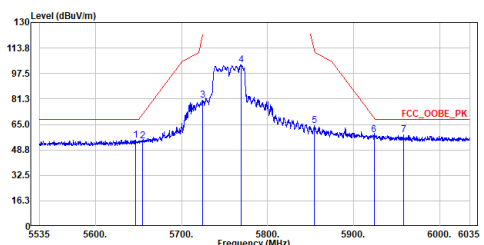


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5646.500	55.12	68.20	-13.08	30.96	24.16	Peak
2	5654.500	54.61	71.54	-16.93	30.42	24.19	Peak
3	5724.500	80.30	120.49	-40.19	55.90	24.40	Peak
4	5769.000	103.07	-----	-----	78.52	24.55	Peak
5	5854.500	64.38	111.94	-47.56	39.56	24.82	Peak
6	5923.750	58.55	69.13	-10.58	33.52	25.03	Peak
7	5958.500	58.27	68.20	-9.93	33.11	25.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5755MHz
Test By :Gary

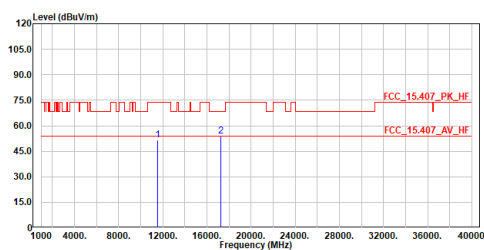

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	51.58	74.00	-22.42	53.32	-1.74	Peak
2	17265.000	53.67	68.20	-14.53	52.11	1.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5755MHz
Test By :Gary

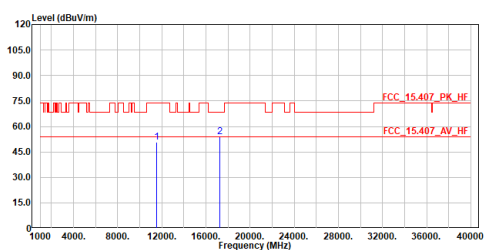

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	50.88	74.00	-23.12	52.62	-1.74	Peak
2	17265.000	53.72	68.20	-14.48	52.16	1.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5795MHz
Test By :Gary

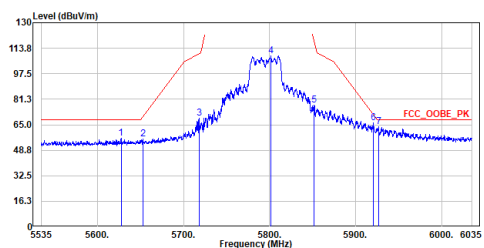

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5627.500	56.23	68.20	-11.97	32.12	24.11	Peak
2	5653.000	55.89	70.43	-14.54	31.70	24.19	Peak
3	5718.000	69.31	110.24	-40.93	44.92	24.39	Peak
4	5801.750	109.11	-----	-----	84.46	24.65	Peak
5	5852.000	77.62	117.64	-40.02	52.81	24.81	Peak
6	5920.500	66.19	71.54	-5.35	41.16	25.03	Peak
7	5926.750	63.77	68.20	-4.43	38.72	25.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5795MHz
Test By :Gary

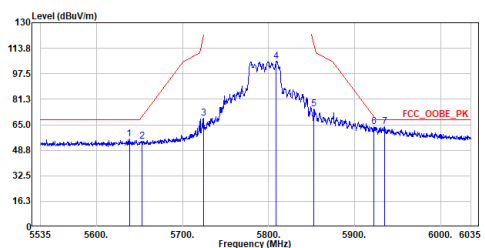

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5638.250	55.86	68.20	-12.34	31.73	24.13	Peak
2	5653.250	54.54	70.61	-16.07	30.35	24.19	Peak
3	5724.250	68.94	120.49	-51.55	44.54	24.40	Peak
4	5809.000	105.46	-----	-----	80.78	24.68	Peak
5	5853.000	74.94	115.36	-40.42	50.12	24.82	Peak
6	5922.250	63.63	70.24	-6.61	38.60	25.03	Peak
7	5935.000	63.59	68.20	-4.61	38.51	25.08	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac40_TX_5795MHz
Test By :Gary

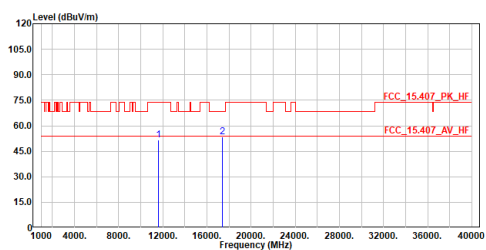


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11590.000	51.64	74.00	-22.36	53.32	-1.68	Peak
2	17385.000	53.55	68.20	-14.65	51.91	1.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac40_TX_5795MHz
Test By :Gary

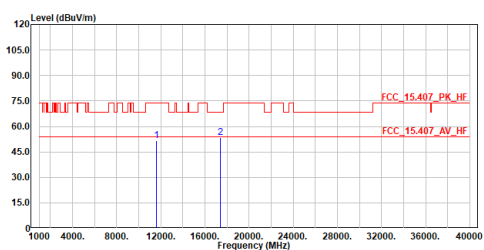


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11590.000	51.58	74.00	-22.42	53.26	-1.68	Peak
2	17385.000	53.51	68.20	-14.69	51.87	1.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5210MHz
Test By :Gary

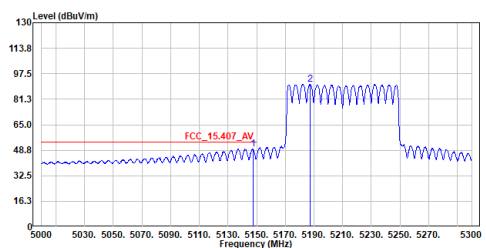


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5147.600	49.78	54.00	-4.22	26.31	23.47	Average
2	5187.200	90.81	-----	-----	67.30	23.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5210MHz
Test By :Gary

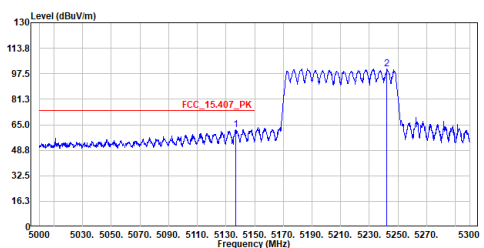


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5136.950	62.04	74.00	-11.96	38.57	23.47	Peak
2	5242.250	100.75	-----	-----	77.22	23.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5210MHz
Test By :Gary

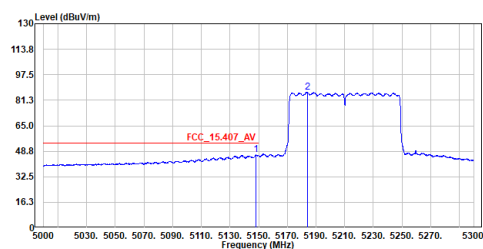

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5148.350	46.38	54.00	-7.62	22.91	23.47	Average
2	5183.900	86.39	-----	-----	62.88	23.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5210MHz
Test By :Gary

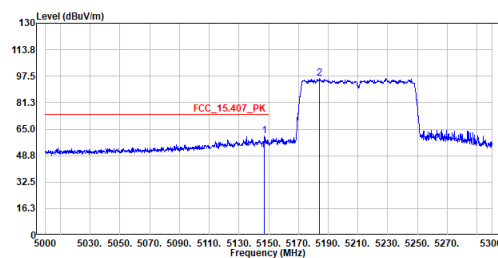

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5147.300	60.64	74.00	-13.36	37.17	23.47	Peak
2	5184.350	96.22	-----	-----	72.71	23.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5210MHz
Test By :Gary

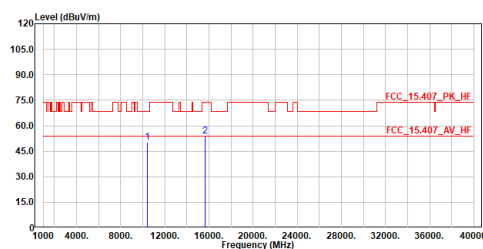

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10420.000	50.40	68.20	-17.80	53.83	-3.43	Peak
2	15630.000	53.70	74.00	-20.30	50.78	2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5210MHz
Test By :Gary

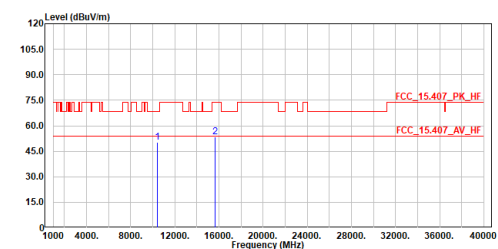

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10420.000	50.21	68.20	-17.99	53.64	-3.43	Peak
2	15630.000	53.37	74.00	-20.63	50.45	2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5290MHz
Test By :Gary

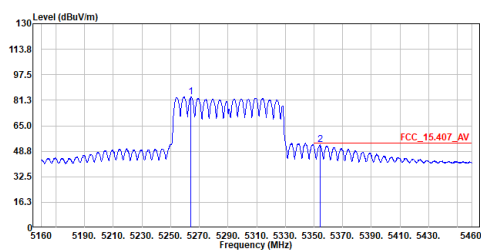

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5264.100	83.38	-----	-----	59.83	23.55	Average
2	5354.100	52.90	54.00	-1.10	29.29	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5290MHz
Test By :Gary

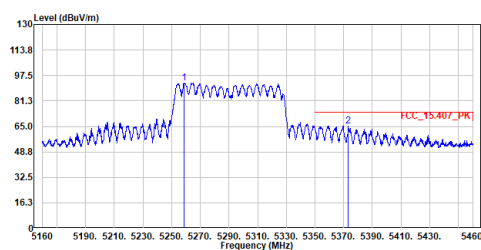

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5258.850	92.77	-----	-----	69.22	23.55	Peak
2	5373.300	65.47	74.00	-8.53	41.85	23.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5290MHz
Test By :Gary

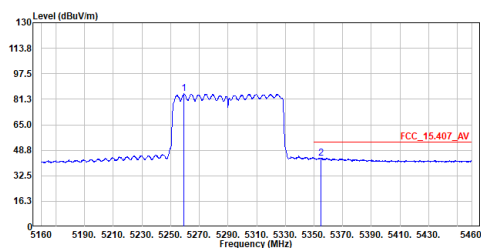

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5259.450	84.64	-----	-----	61.09	23.55	Average
2	5354.850	43.88	54.00	-10.12	20.27	23.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5290MHz
Test By :Gary

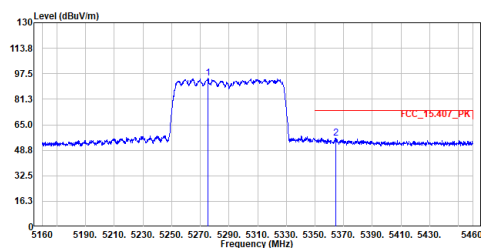

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5275.500	94.57	-----	-----	71.02	23.55	Peak
2	5364.300	56.57	74.00	-17.43	32.96	23.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5290MHz
Test By :Gary

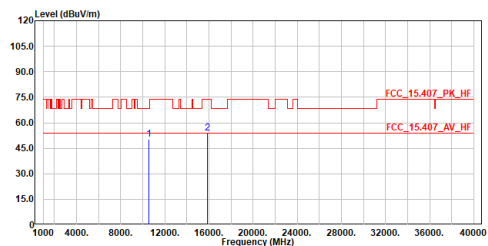

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10580.000	50.37	68.20	-17.83	53.61	-3.24	Peak
2	15870.000	53.70	74.00	-20.30	50.84	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5290MHz
Test By :Gary

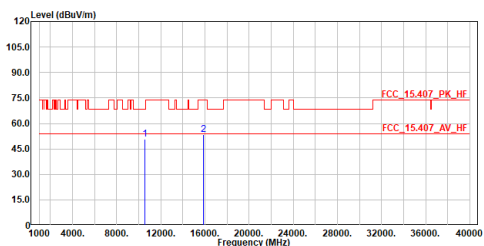

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10580.000	50.67	68.20	-17.53	53.91	-3.24	Peak
2	15870.000	53.44	74.00	-20.56	50.58	2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5530MHz
Test By :Gary

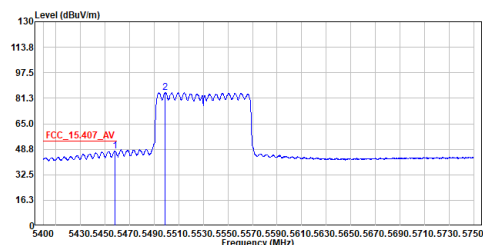

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.275	47.64	54.00	-6.36	23.96	23.68	Average
2	5498.700	84.82	-----	-----	61.12	23.70	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5530MHz
Test By :Gary

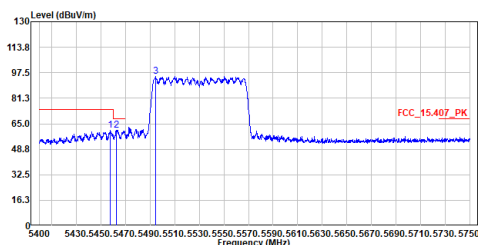

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5457.400	60.61	74.00	-13.39	36.93	23.68	Peak
2	5462.825	61.00	68.20	-7.20	37.33	23.67	Peak
3	5494.325	95.07	-----	-----	71.37	23.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5530MHz
Test By :Gary

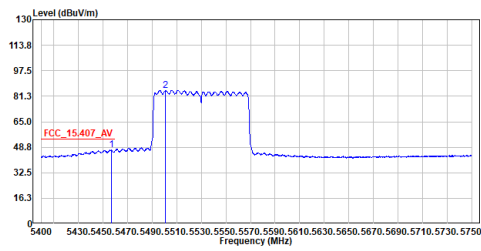


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5456.875	47.04	54.00	-6.96	23.36	23.68	Average
2	5500.975	85.10	-----	-----	61.40	23.70	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5530MHz
Test By :Gary

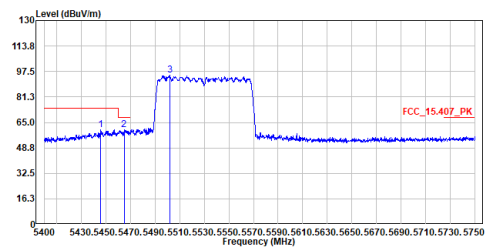


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5445.850	60.54	74.00	-13.46	36.88	23.66	Peak
2	5464.750	60.27	68.20	-7.93	36.60	23.67	Peak
3	5501.850	95.21	-----	-----	71.51	23.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5530MHz
Test By :Gary

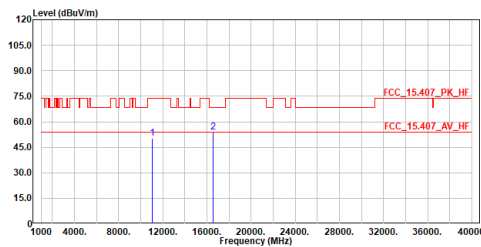


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11060.000	50.47	74.00	-23.53	52.95	-2.48	Peak
2	16590.000	53.72	68.20	-14.48	51.80	1.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5530MHz
Test By :Gary

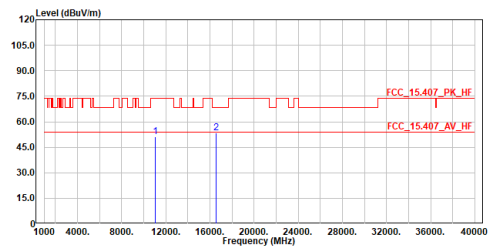


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11060.000	51.26	74.00	-22.74	53.74	-2.48	Peak
2	16590.000	53.46	68.20	-14.74	51.54	1.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5610MHz
Test By :Gary

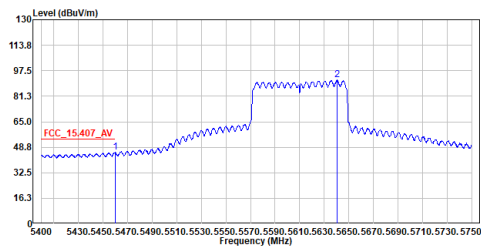

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.850	45.61	54.00	-8.39	21.93	23.68	Average
2	5640.625	91.50	-----	-----	67.36	24.14	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5610MHz
Test By :Gary

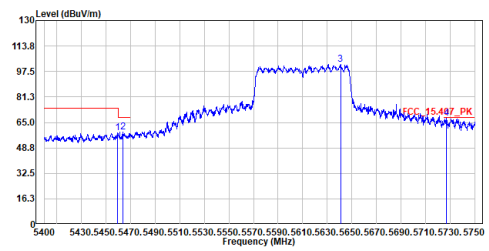

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.325	58.28	74.00	-15.72	34.60	23.68	Peak
2	5463.700	58.86	68.20	-9.34	35.19	23.67	Peak
3	5640.800	101.94	-----	-----	77.80	24.14	Peak
4	5726.900	67.73	68.20	-0.47	43.31	24.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5610MHz
Test By :Gary

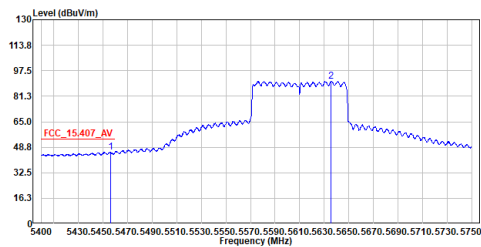

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5456.175	45.52	54.00	-8.48	21.84	23.68	Average
2	5635.550	90.83	-----	-----	66.70	24.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5610MHz
Test By :Gary

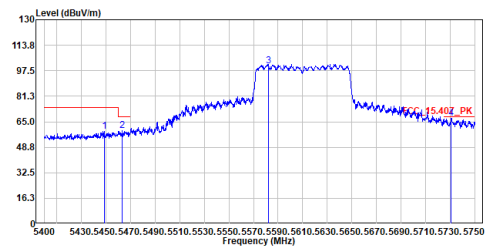

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5448.475	58.74	74.00	-15.26	35.08	23.66	Peak
2	5463.350	59.32	68.20	-8.88	35.65	23.67	Peak
3	5582.000	100.76	-----	-----	76.80	23.96	Peak
4	5730.925	67.27	68.20	-0.93	42.84	24.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5610MHz
Test By :Gary



No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11220.000	51.05	74.00	-22.95	53.26	-2.21	Peak
2	16830.000	53.51	68.20	-14.69	51.91	1.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5610MHz
Test By :Gary

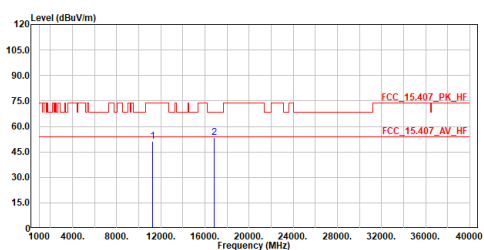

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11220.000	51.36	74.00	-22.64	53.57	-2.21	Peak
2	16830.000	53.21	68.20	-14.99	51.61	1.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5690MHz
Test By :Gary

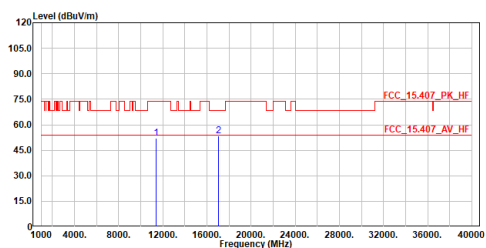

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11380.000	51.98	74.00	-22.02	53.92	-1.94	Peak
2	17070.000	53.34	68.20	-14.86	51.91	1.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5690MHz
Test By :Gary

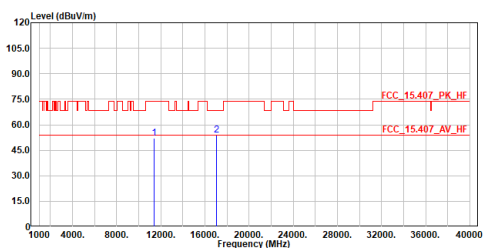

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11380.000	51.94	74.00	-22.06	53.88	-1.94	Peak
2	17070.000	53.78	68.20	-14.42	52.35	1.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5775MHz
Test By :Gary

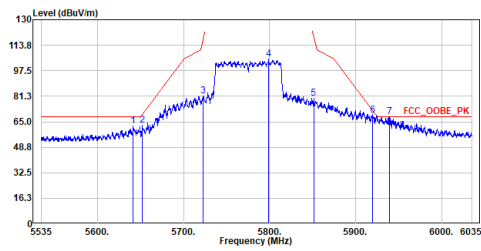


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5641.750	62.11	68.20	-6.09	37.96	24.15	Peak
2	5652.250	62.64	69.87	-7.23	38.47	24.17	Peak
3	5723.000	81.30	117.64	-36.34	56.90	24.40	Peak
4	5799.000	105.17	-----	-----	80.52	24.65	Peak
5	5851.250	80.08	119.35	-39.27	55.27	24.81	Peak
6	5920.000	69.34	71.91	-2.57	44.32	25.02	Peak
7	5939.000	68.18	68.20	-0.02	43.09	25.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5775MHz
Test By :Gary

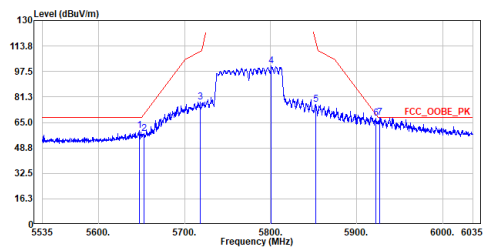


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5648.000	59.69	68.20	-8.51	35.52	24.17	Peak
2	5653.250	58.12	70.61	-12.49	33.93	24.19	Peak
3	5718.250	78.03	110.31	-32.28	53.64	24.39	Peak
4	5800.750	100.95	-----	-----	76.30	24.65	Peak
5	5852.250	76.58	117.07	-40.49	51.77	24.81	Peak
6	5922.750	67.73	69.87	-2.14	42.70	25.03	Peak
7	5926.500	67.96	68.20	-0.24	42.91	25.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :ac80_TX_5775MHz
Test By :Gary

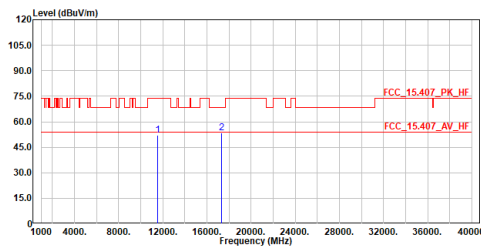


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11550.000	52.09	74.00	-21.91	53.80	-1.71	Peak
2	17325.000	53.50	68.20	-14.70	51.90	1.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :ac80_TX_5775MHz
Test By :Gary

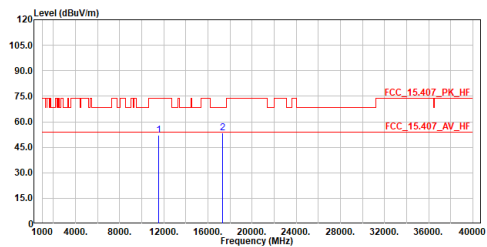

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11550.000	52.00	74.00	-22.00	53.71	-1.71	Peak
2	17325.000	53.34	68.20	-14.86	51.74	1.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Appendix C. Test Result of Radiated Emissions Co-location

1. WiFi 2.4 GHz + Bluetooth

30 MHz ~ 1 GHz:




Above 1 GHz:



2. WiFi 5 GHz + Bluetooth

30 MHz ~ 1 GHz:


Site :HC-CB02
Condition :3m Horizontal
Mode :LF Co-location WIFI 5G+BLE
Test By :Gary

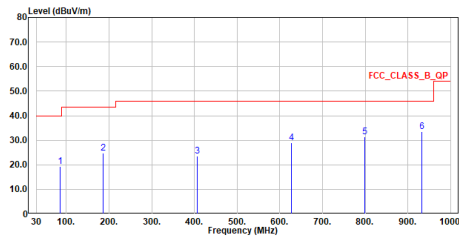

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	84.884	19.34	40.00	-20.66	27.20	-7.86	QP
2	186.615	24.88	43.50	-18.62	29.61	-4.73	QP
3	405.955	23.63	46.00	-22.37	23.00	0.63	QP
4	627.224	28.94	46.00	-17.06	23.18	5.76	QP
5	798.595	31.54	46.00	-14.46	23.04	8.50	QP
6	932.757	33.39	46.00	-12.61	23.18	10.21	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF Co-location WIFI 5G+BLE
Test By :Gary

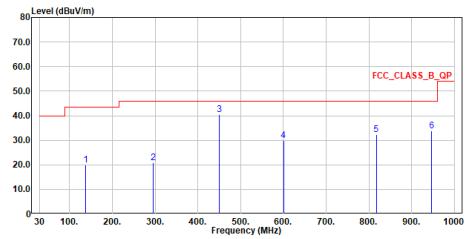


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	137.835	19.93	43.50	-23.57	23.55	-3.62	QP
2	295.886	20.92	46.00	-25.08	23.00	-2.08	QP
3	450.100	40.55	46.00	-5.45	38.36	2.19	QP
4	600.155	29.90	46.00	-16.10	24.55	5.35	QP
5	817.176	32.43	46.00	-13.57	23.63	8.80	QP
6	946.935	33.90	46.00	-12.10	23.23	10.67	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Above 1 GHz:


Site :HC-CB02
Condition :3m Horizontal
Mode :Co-location WIFI 5G+BLE
Test By :Gary

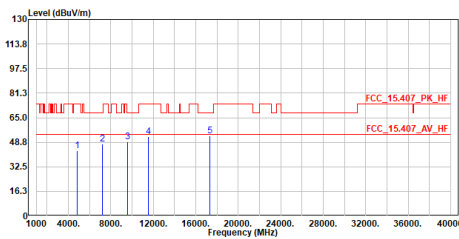

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4804.000	43.17	74.00	-30.83	57.92	-14.75	Peak
2	7206.000	47.54	68.20	-20.66	55.53	-7.99	Peak
3	9608.000	49.07	68.20	-19.13	53.63	-4.56	Peak
4	11550.000	52.35	74.00	-21.65	54.06	-1.71	Peak
5	17325.000	53.16	68.20	-15.04	51.56	1.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :Co-location WIFI 5G+BLE
Test By :Gary

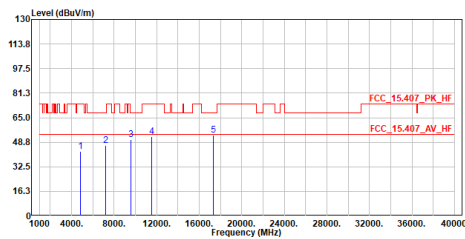

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4804.000	42.86	74.00	-31.14	57.61	-14.75	Peak
2	7206.000	46.49	68.20	-21.71	54.48	-7.99	Peak
3	9608.000	50.36	68.20	-17.84	54.92	-4.56	Peak
4	11550.000	52.34	74.00	-21.66	54.05	-1.71	Peak
5	17325.000	53.62	68.20	-14.58	52.02	1.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.