



Appendix for Test report

Appendix A: DTS (6 dB) Bandwidth

In this document, the "DTS6dBBW" refers to the measured "DTS (6 dB) Bandwidth" value. In this Appendix, the "fc(DTS6dBBW)" refers to the centre of the measured "DTS6dBBW". The introduction of the "fc(DTS6dBBW)" is due to that other measurements use it as the spectrum analyzer setting.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.


Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	DTS6dBBW[MHz]	Verdict
11B	L	2412	Ant 1	8.05	pass
11B	L	2412	Ant 2	8.07	pass
11B	M	2437	Ant 1	8.15	pass
11B	M	2437	Ant 2	8.17	pass
11B	H	2462	Ant 1	7.99	pass
11B	H	2462	Ant 2	8.07	pass
11G	L	2412	Ant 1	15.72	pass
11G	L	2412	Ant 2	15.73	pass
11G	M	2437	Ant 1	16.39	pass
11G	M	2437	Ant 2	16.42	pass
11G	H	2462	Ant 1	15.96	pass
11G	H	2462	Ant 2	15.70	pass
11N20	L	2412	Ant 1	15.99	pass
11N20	L	2412	Ant 2	17.30	pass
11N20	M	2437	Ant 1	17.62	pass
11N20	M	2437	Ant 2	17.66	pass
11N20	H	2462	Ant 1	17.25	pass
11N20	H	2462	Ant 2	17.27	pass
11N20m	L	2412	Ant 1	15.73	pass
11N20m	L	2412	Ant 2	15.74	pass
11N20m	M	2437	Ant 1	17.62	pass
11N20m	M	2437	Ant 2	17.65	pass
11N20m	H	2462	Ant 1	16.89	pass
11N20m	H	2462	Ant 2	17.46	pass
11N40	L	2422	Ant 1	36.36	pass
11N40	L	2422	Ant 2	36.38	pass
11N40	M	2437	Ant 1	36.56	pass
11N40	M	2437	Ant 2	36.57	pass


Test Mode	Test Channel	Frequency[MHz]	Ant	DTS6dBBW[MHz]	Verdict
11N40	H	2452	Ant 1	36.42	pass
11N40	H	2452	Ant 2	36.45	pass
11N40m	L	2422	Ant 1	36.38	pass
11N40m	L	2422	Ant 2	36.40	pass
11N40m	M	2437	Ant 1	36.56	pass
11N40m	M	2437	Ant 2	36.58	pass
11N40m	H	2452	Ant 1	36.44	pass
11N40m	H	2452	Ant 2	36.44	pass

Part II - Test Plots

2.1 11B_L@Ant 1

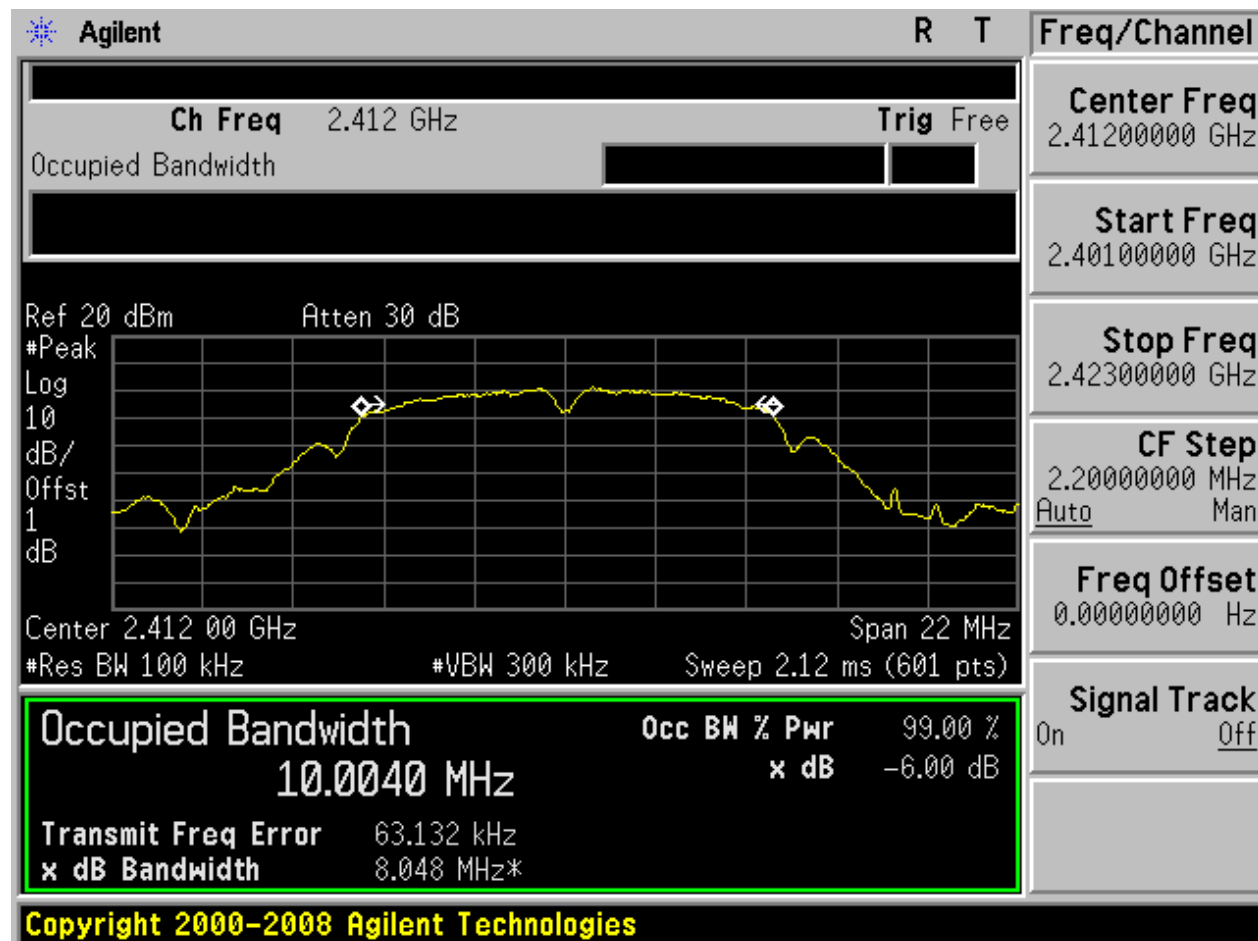


2.2 11B_L@Ant 2

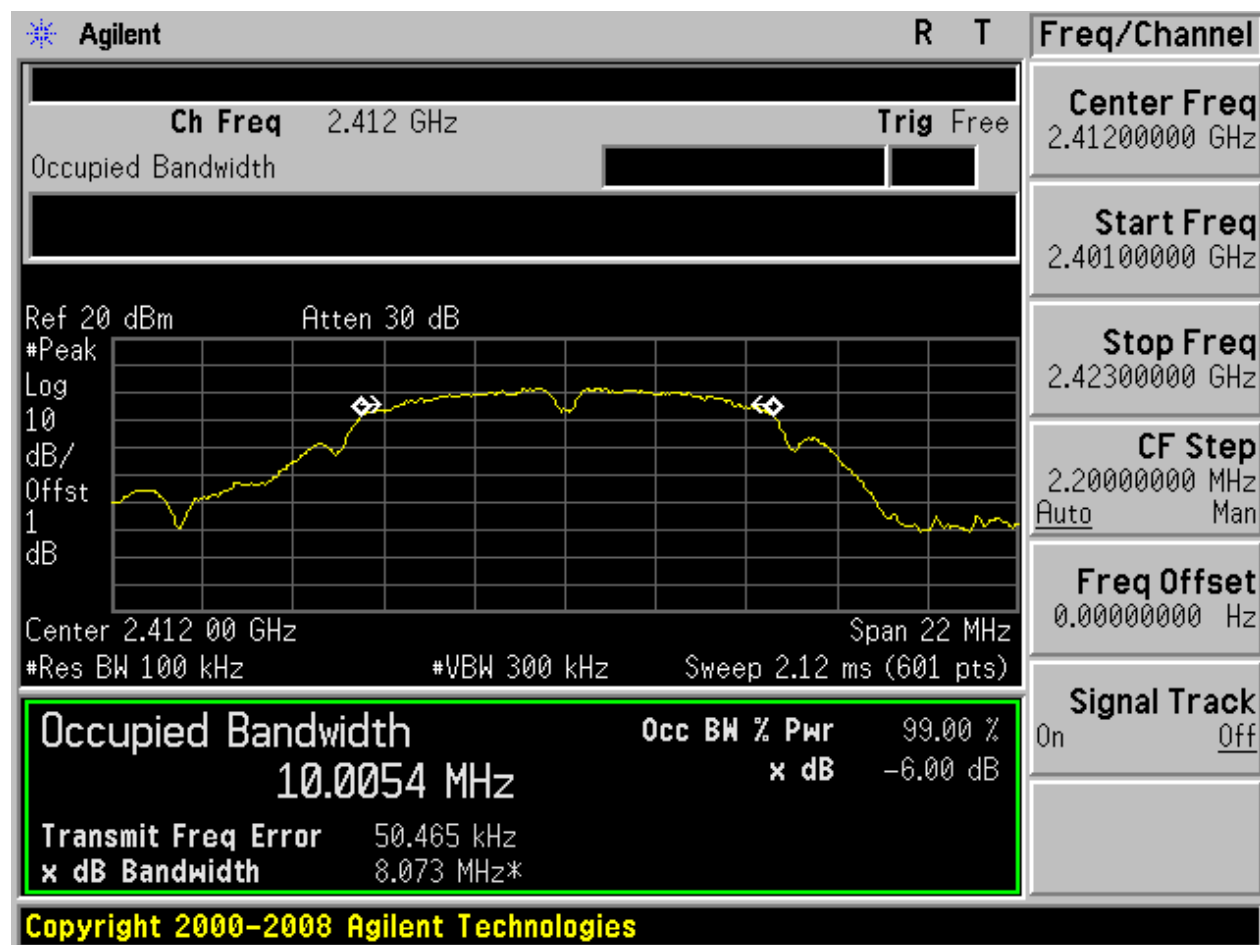




2.3 11B_M@Ant 1

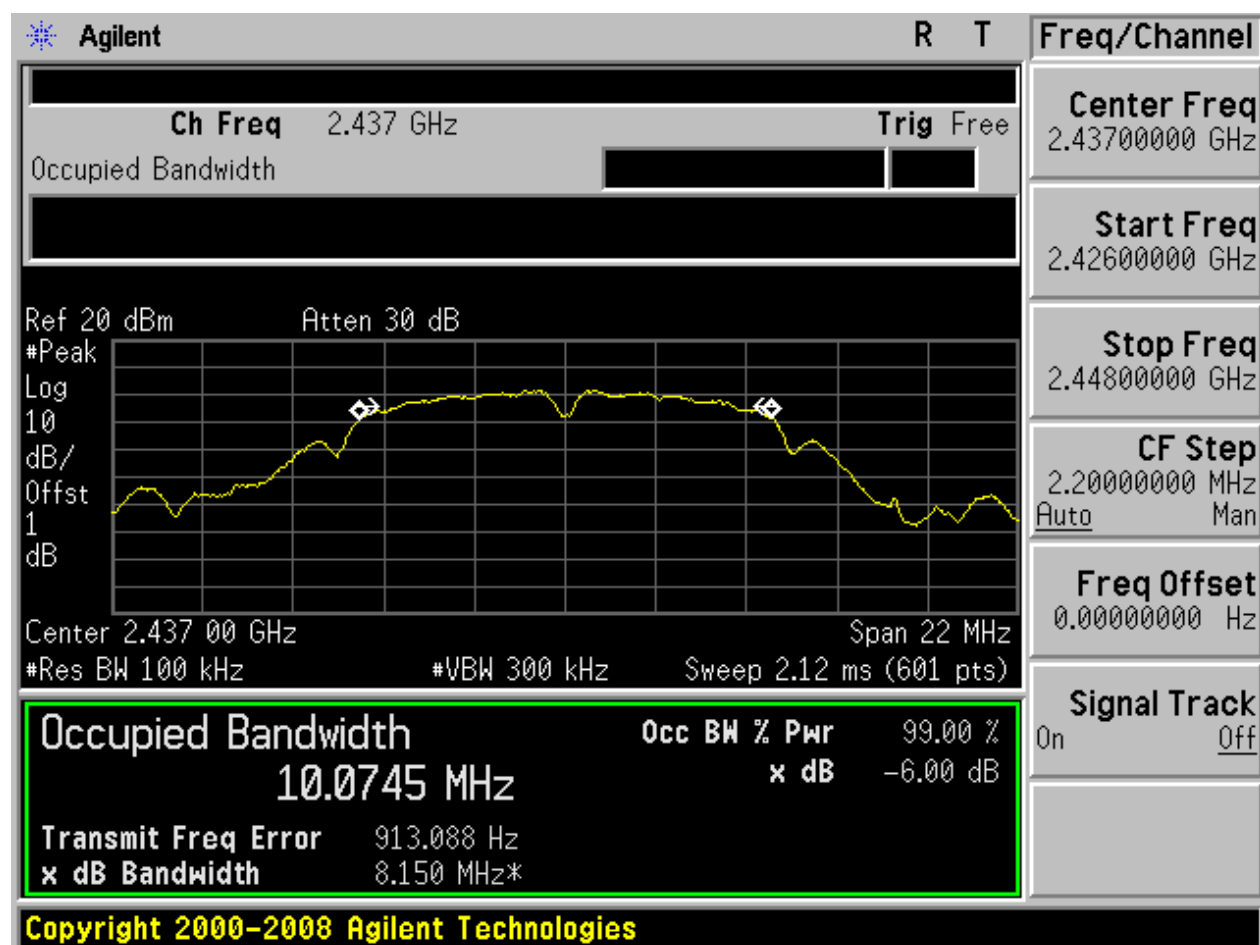





2.4 11B_M@Ant 2

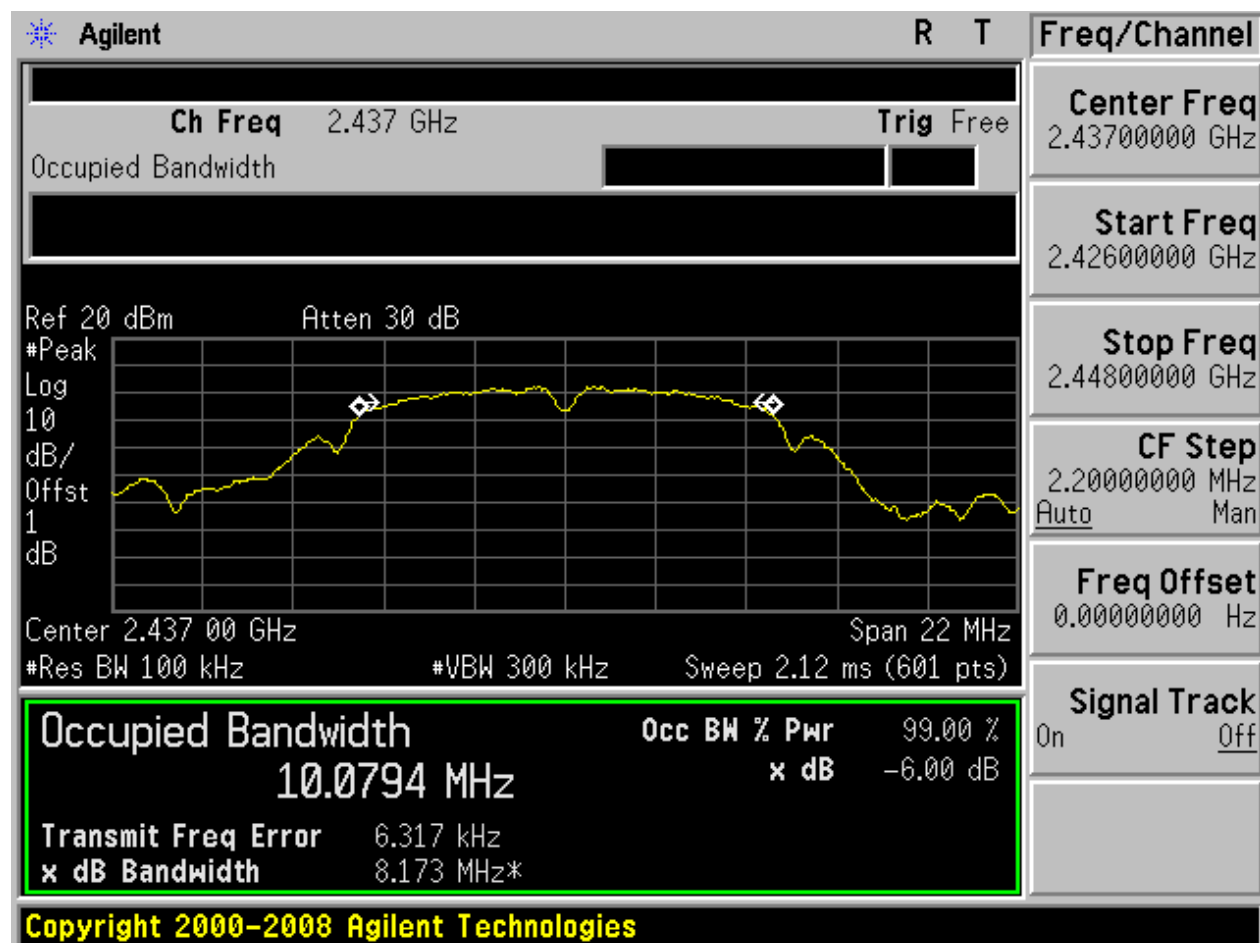


2.5 11B_H@Ant 1

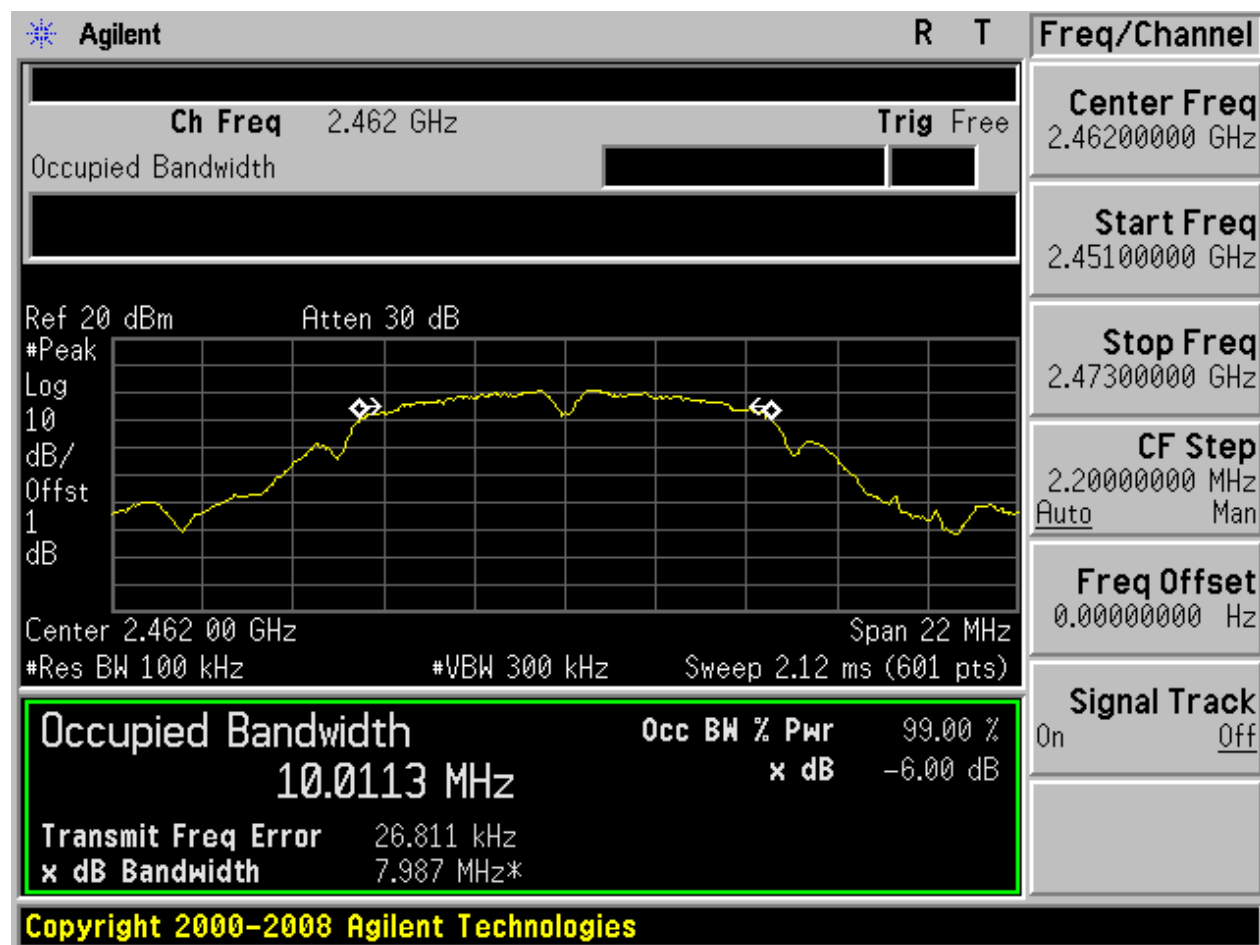

2.6 11B_H@Ant 2

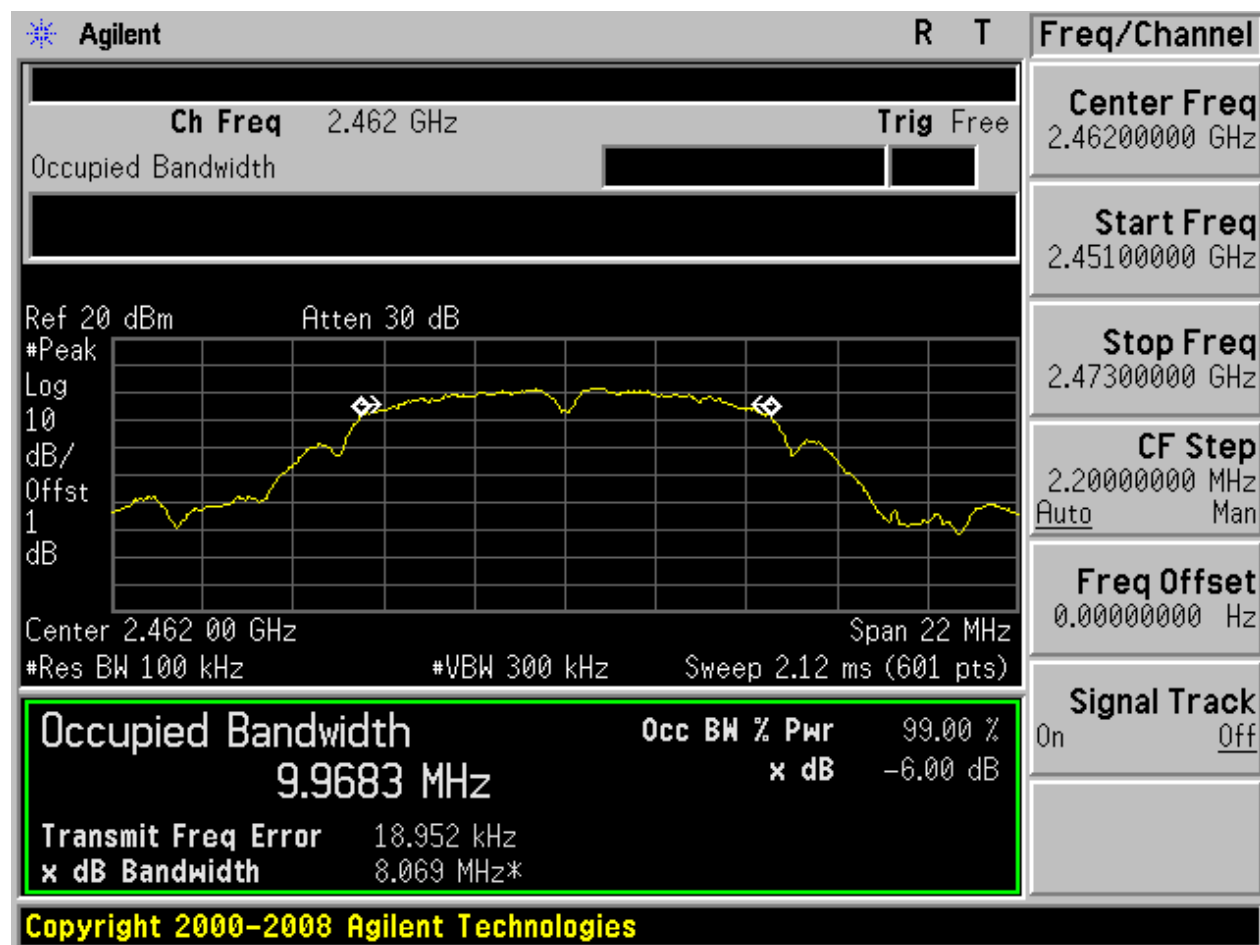


2.7 11G_L@Ant 1

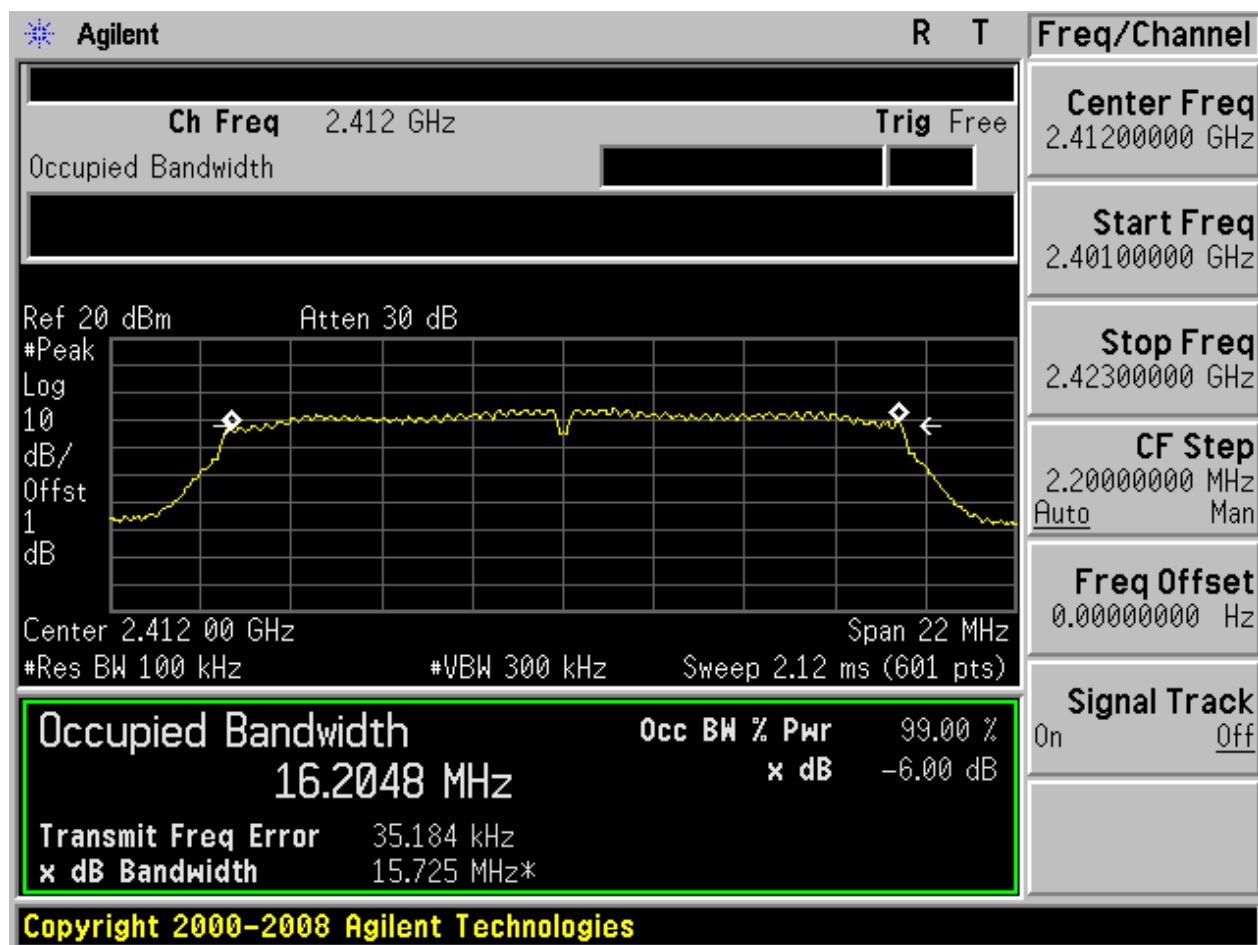




2.8 11G_L@Ant 2

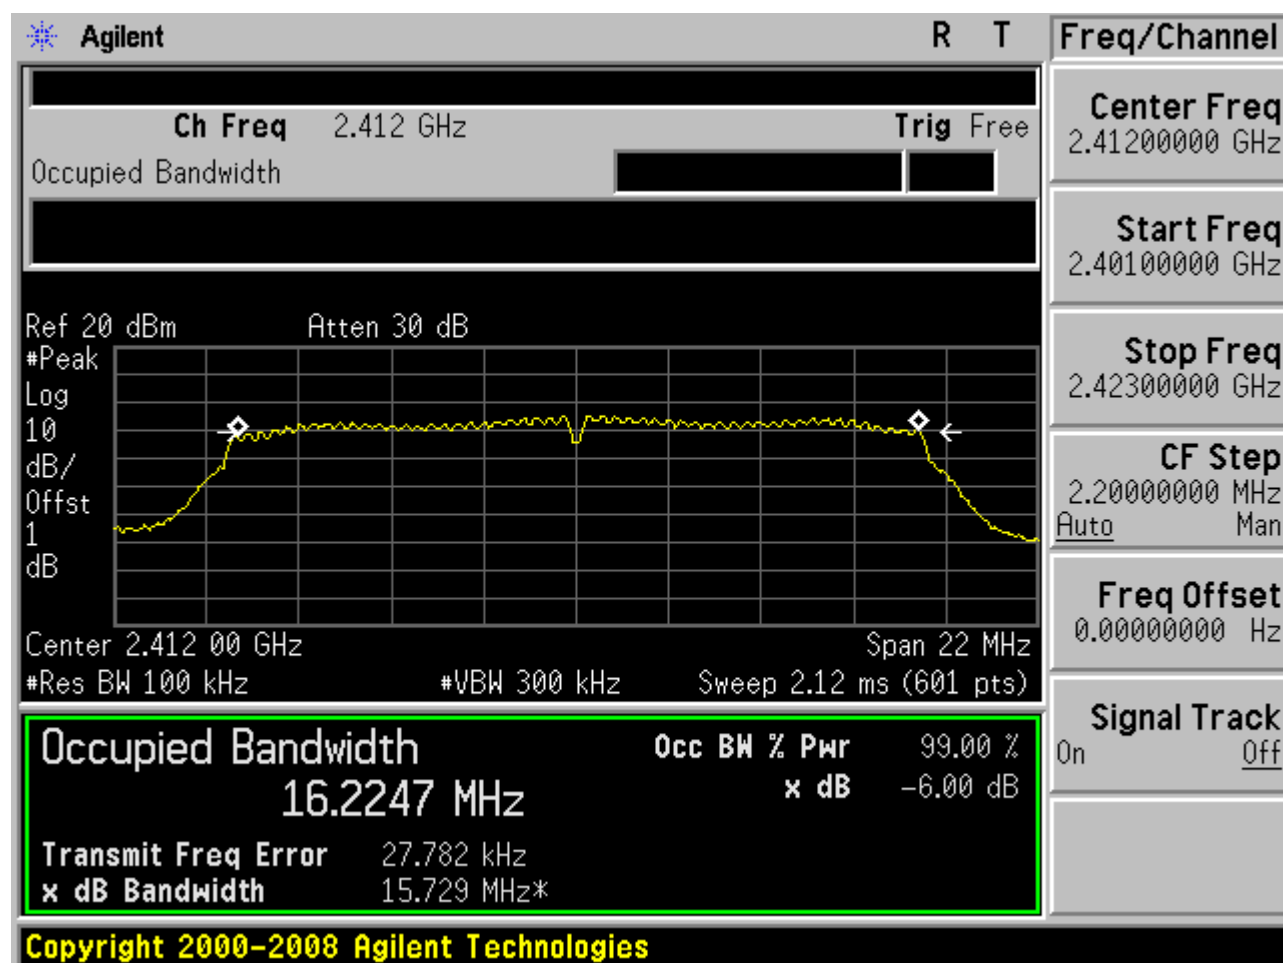




2.9 11G_M@Ant 1

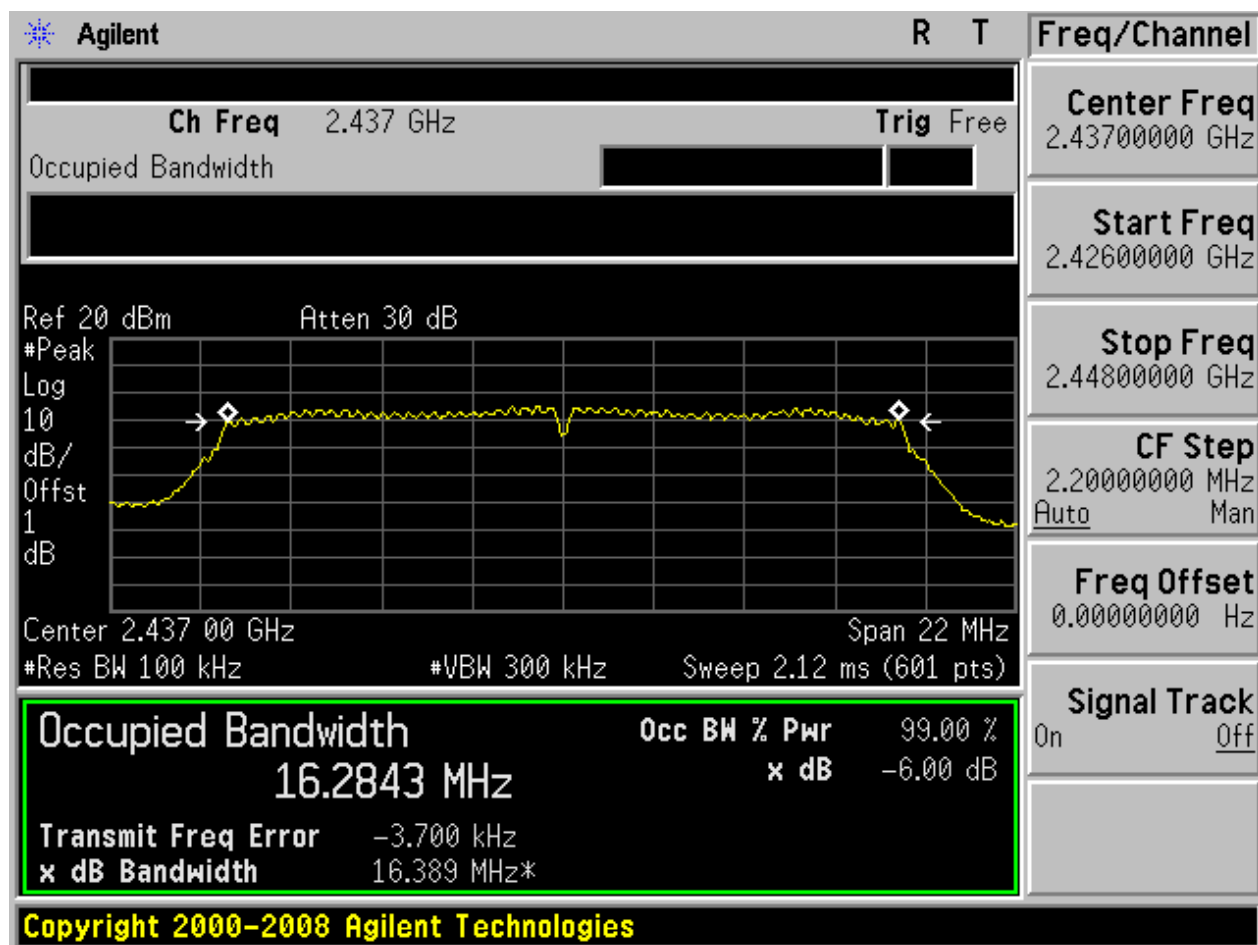




2.10 11G_M@Ant 2

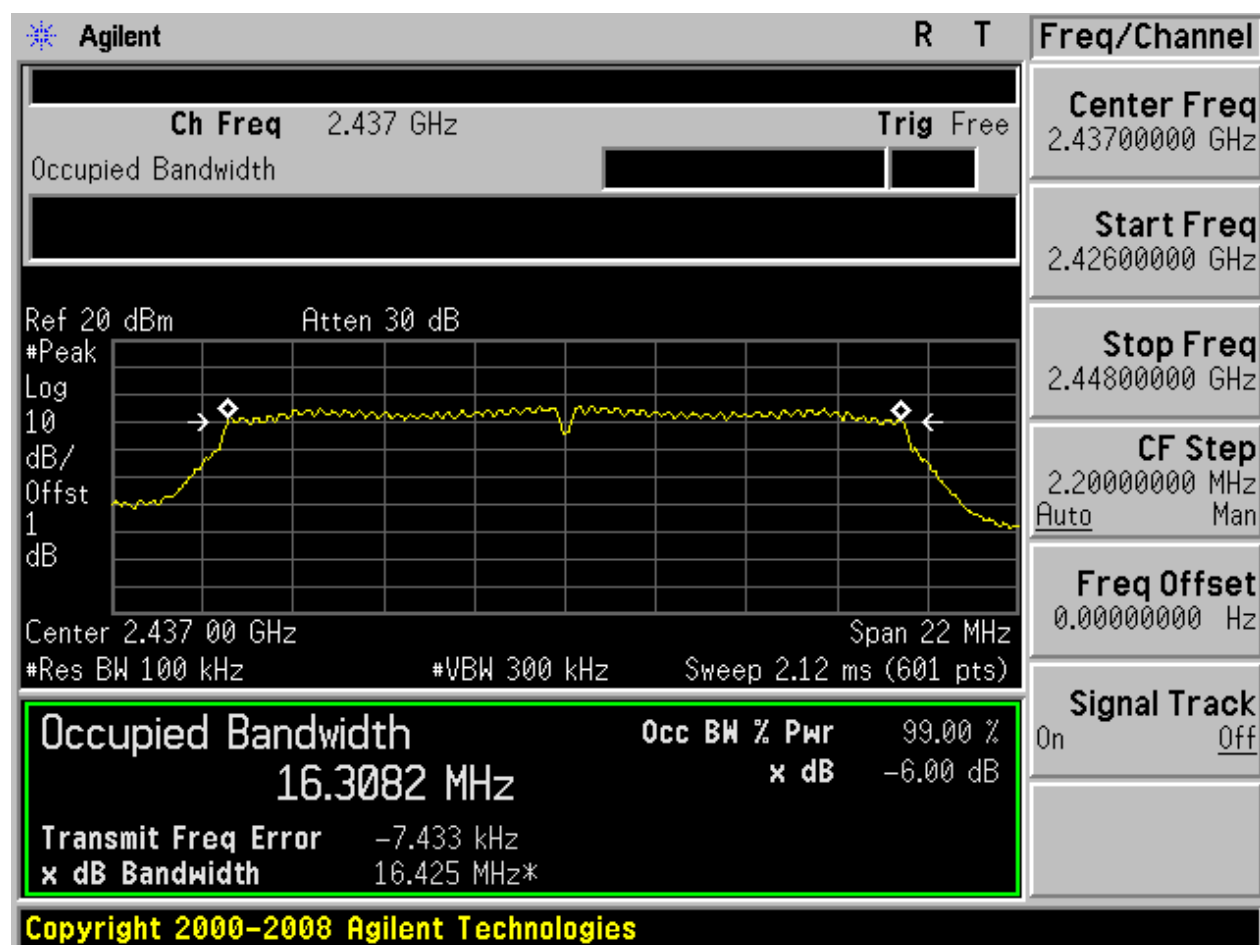




2.11 11G_H@Ant 1

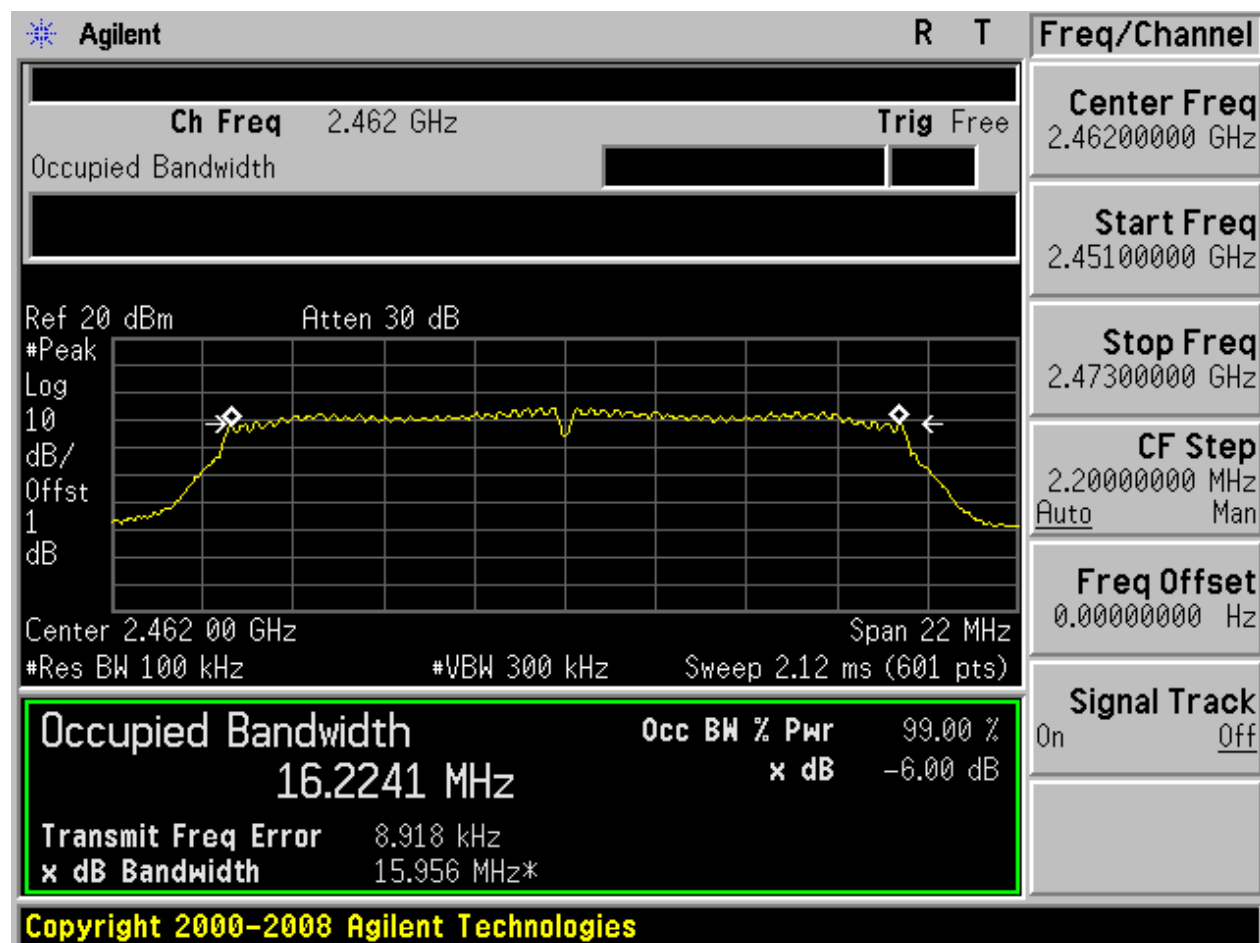




2.12 11G_H@Ant 2

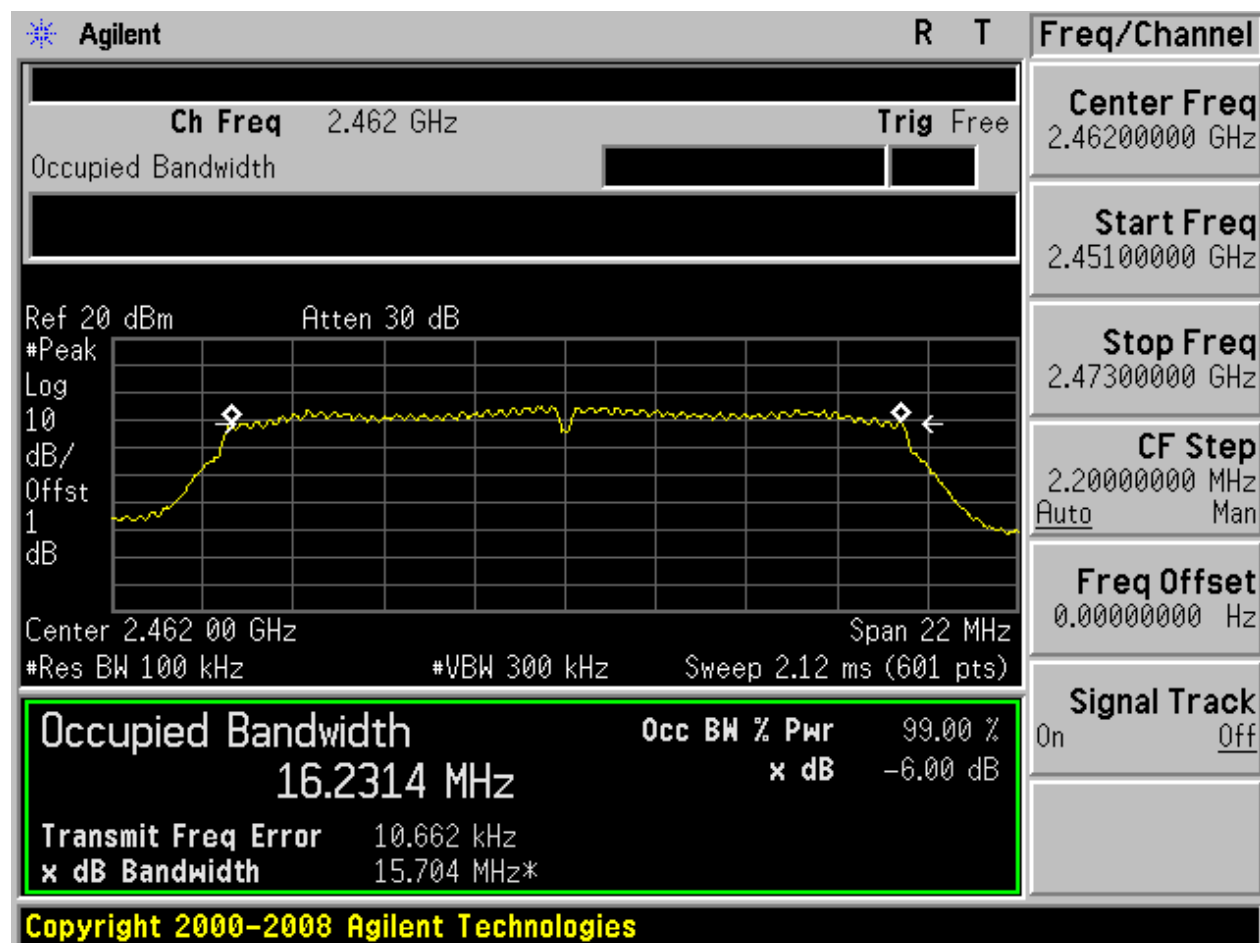


2.13 11N20_L@Ant 1

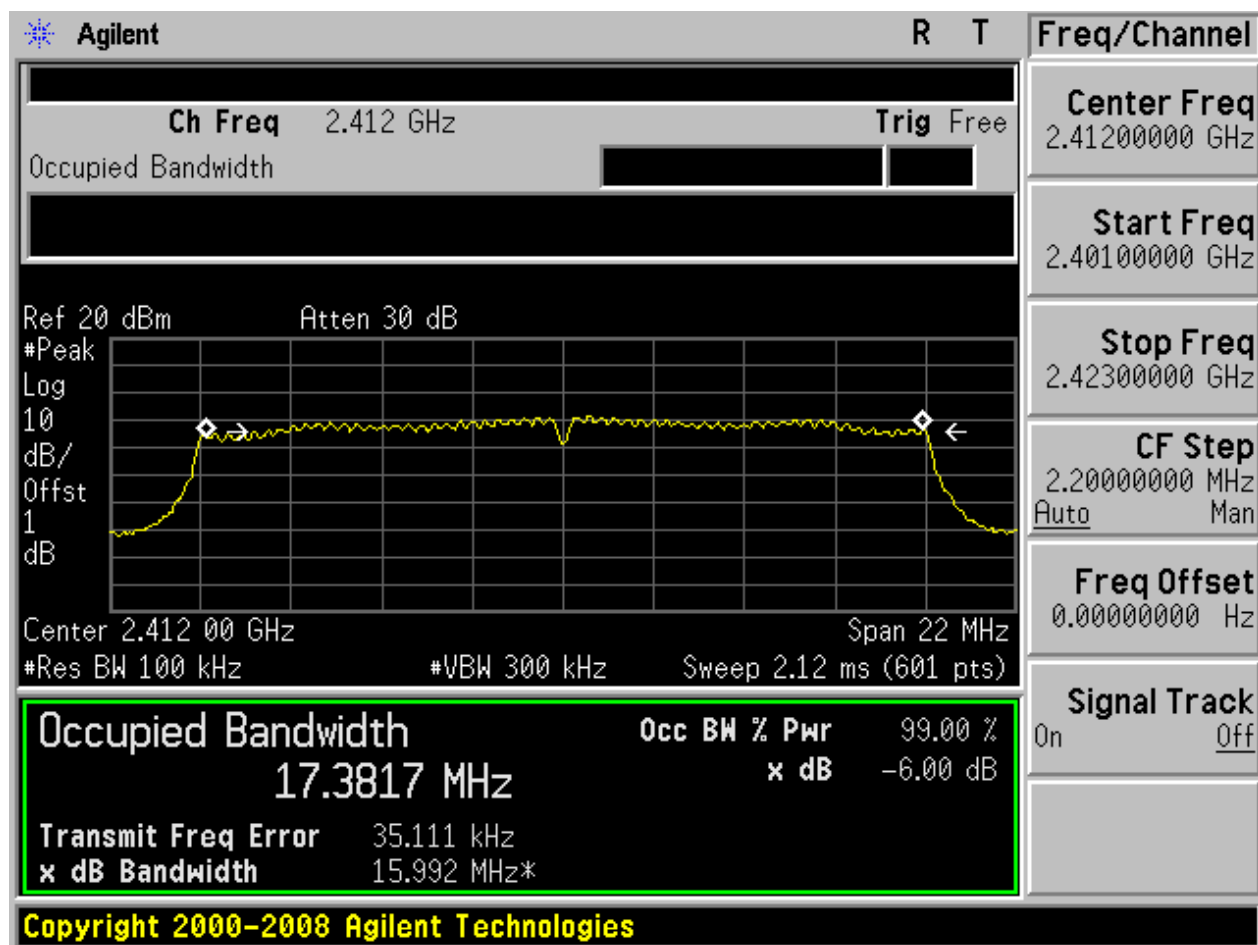




2.14 11N20_L@Ant 2

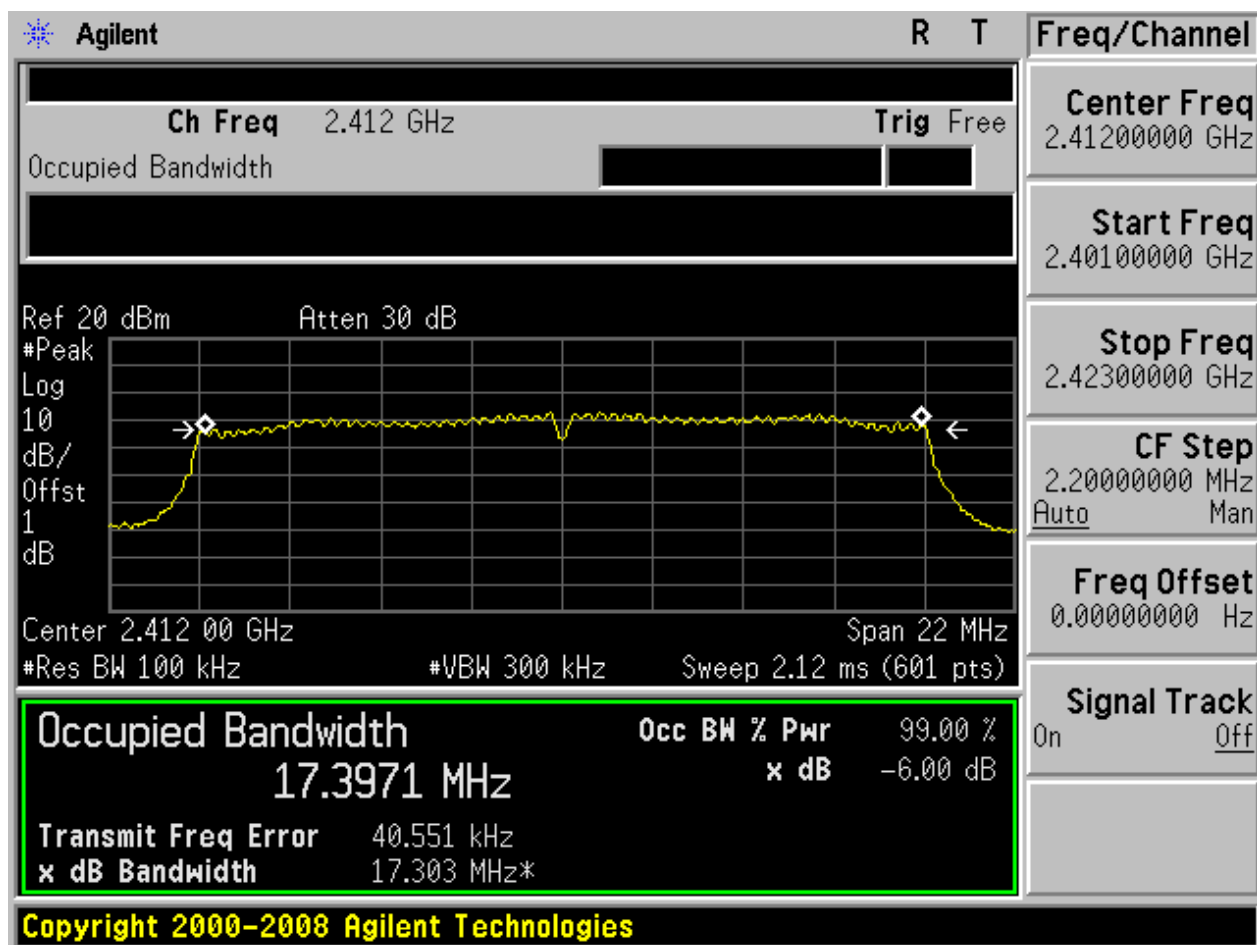


2.15 11N20_M@Ant 1

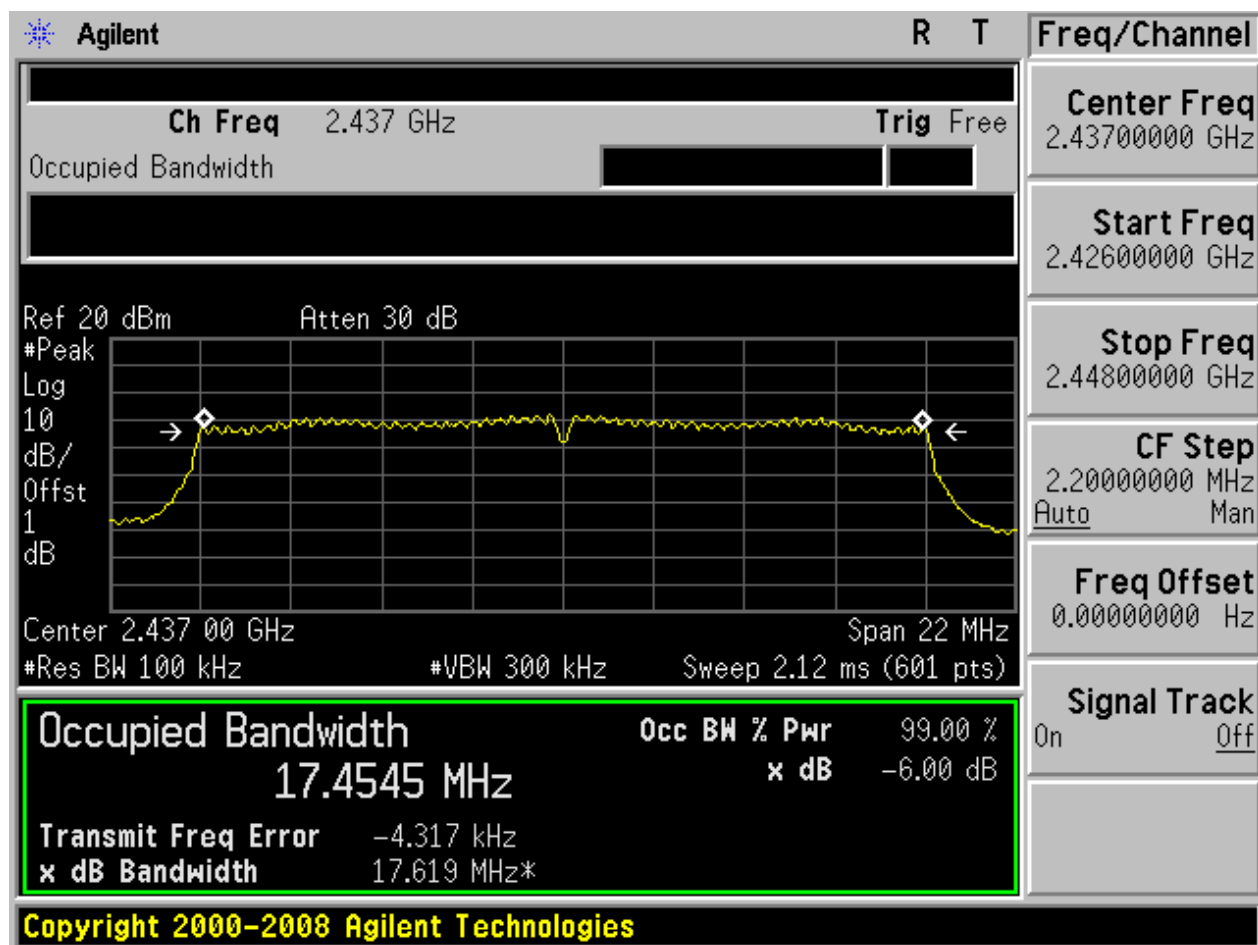




2.16 11N20_M@Ant 2

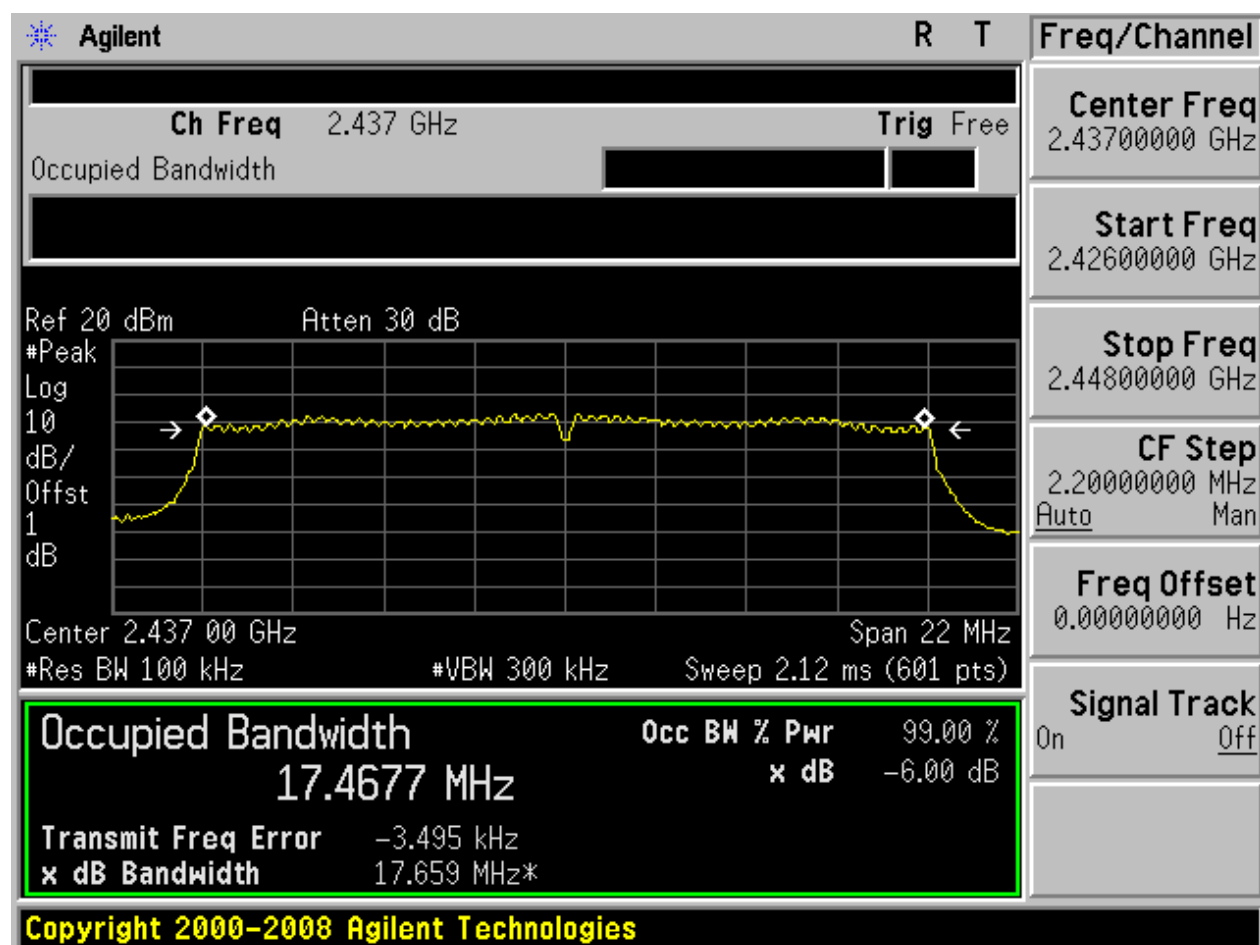




2.17 11N20_H@Ant 1

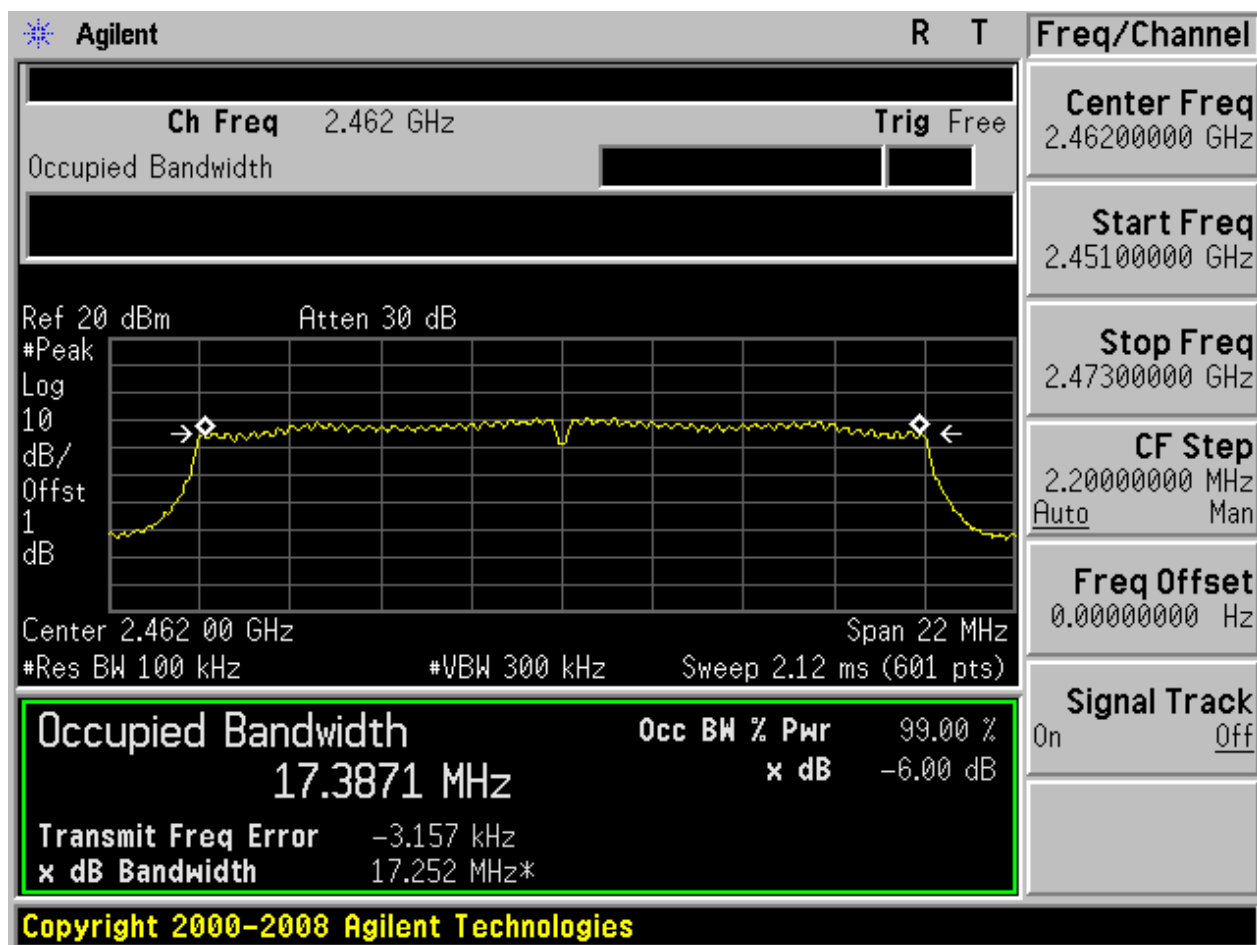




2.18 11N20_H@Ant 2

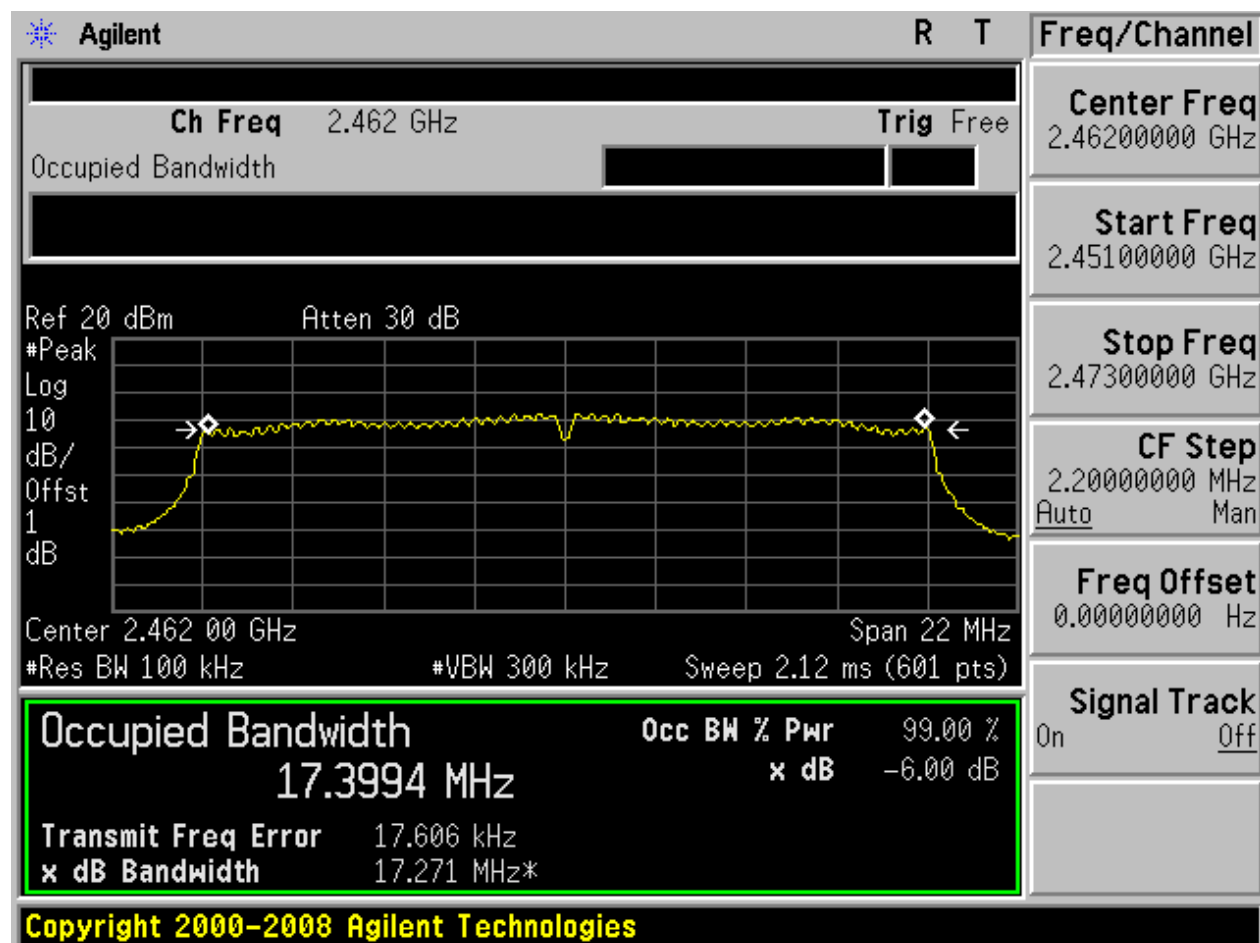




2.13 11N20m_L@Ant 1

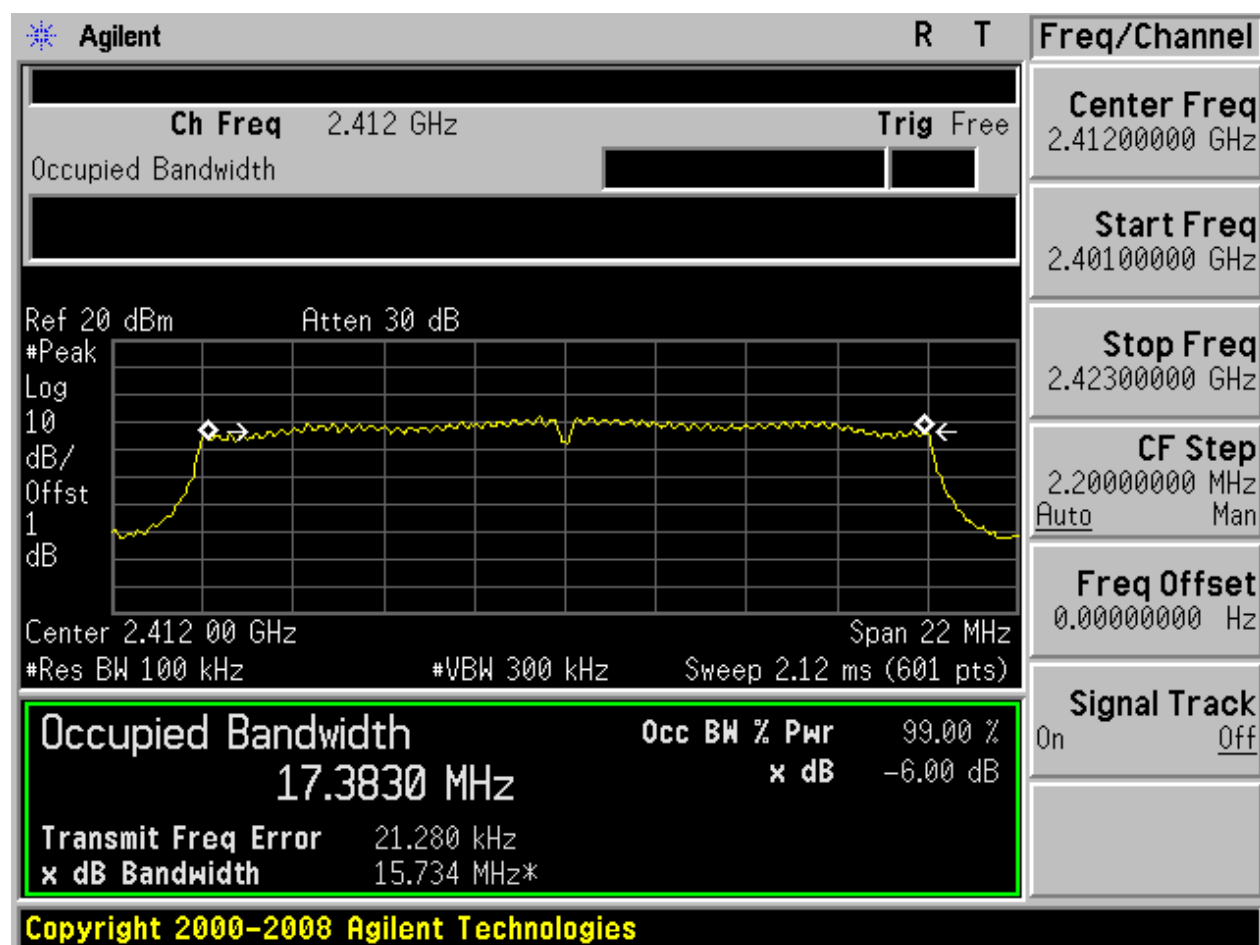




2.14 11N20m_L@Ant 2

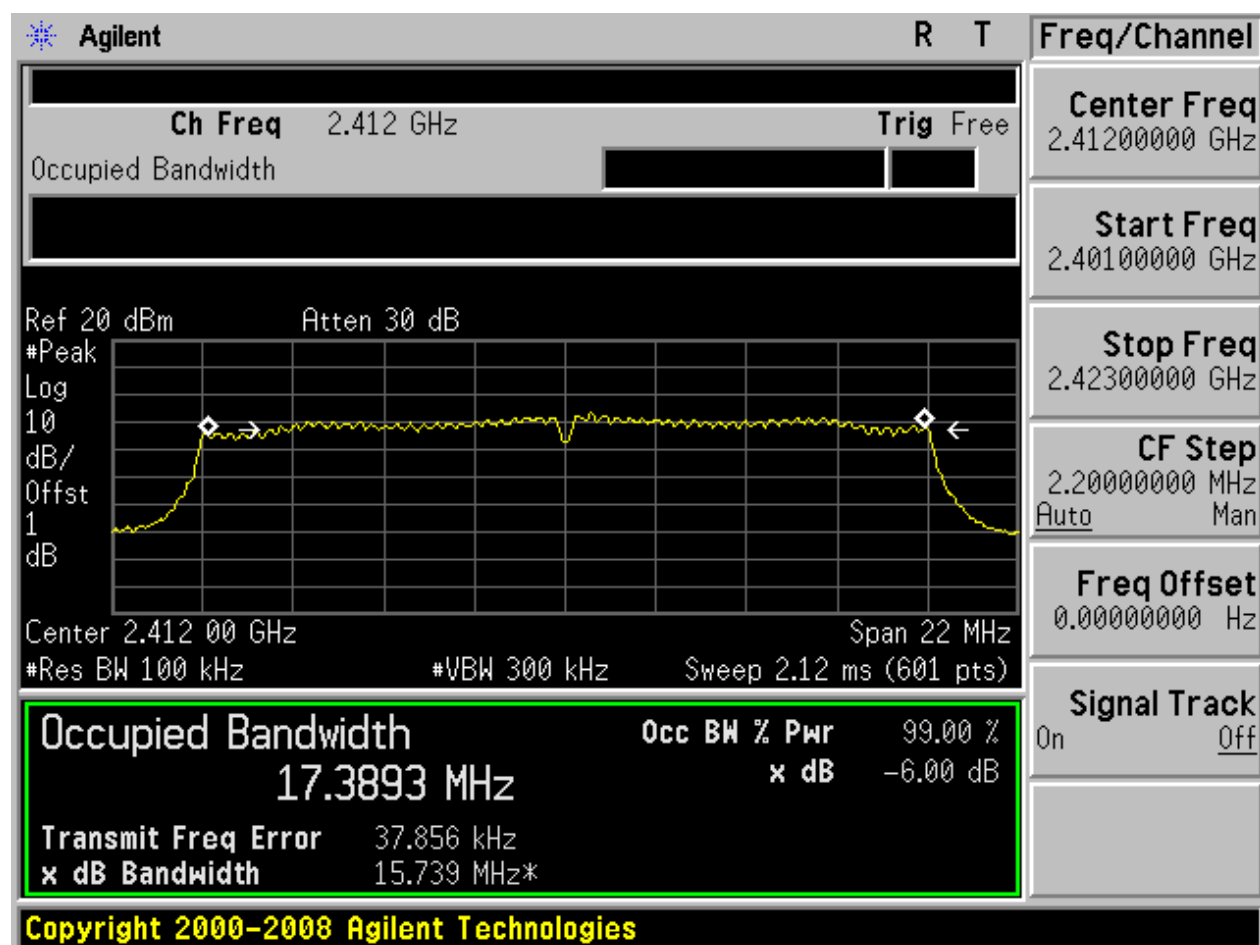


2.15 11N20m_M@Ant 1

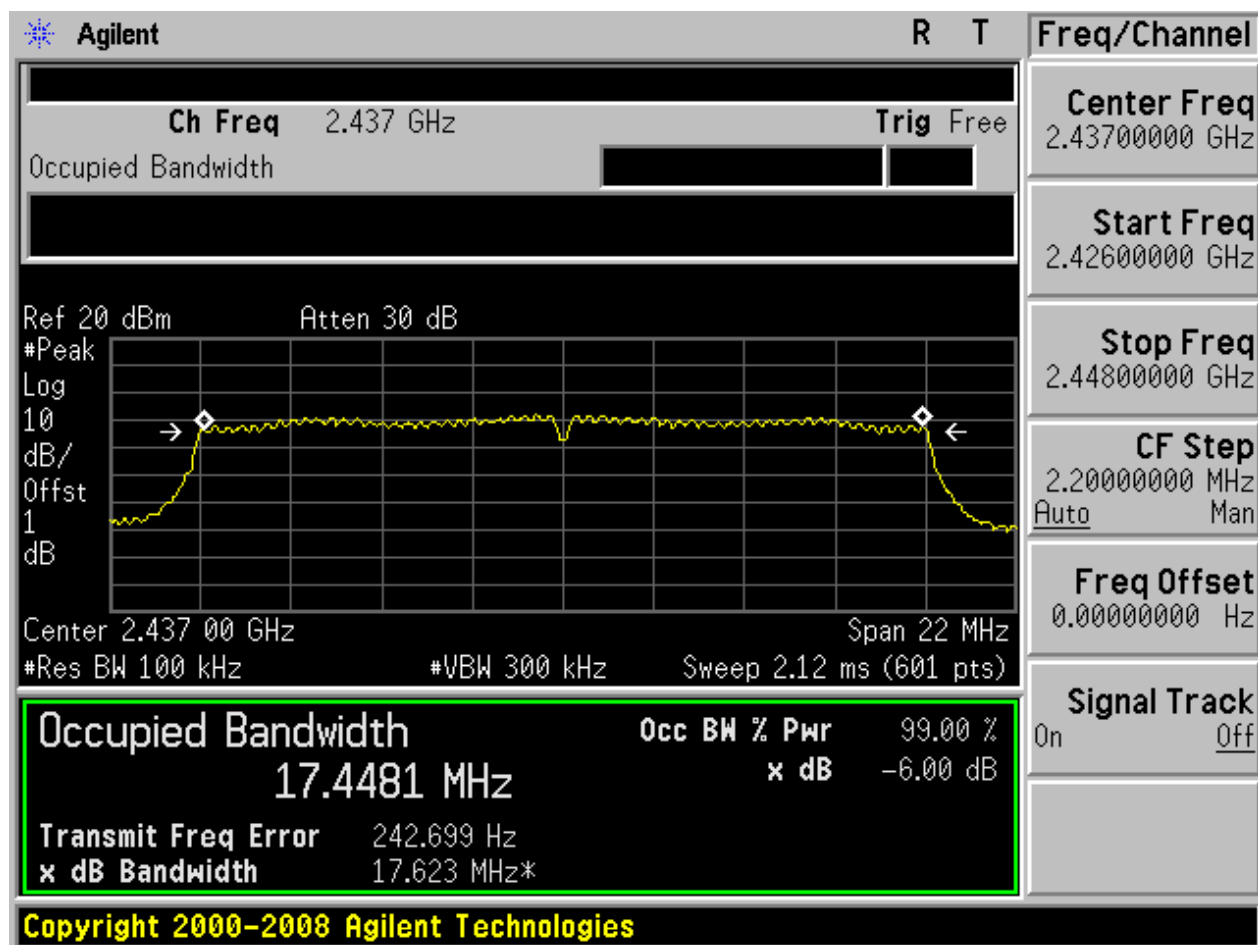




2.16 11N20m_M@Ant 2

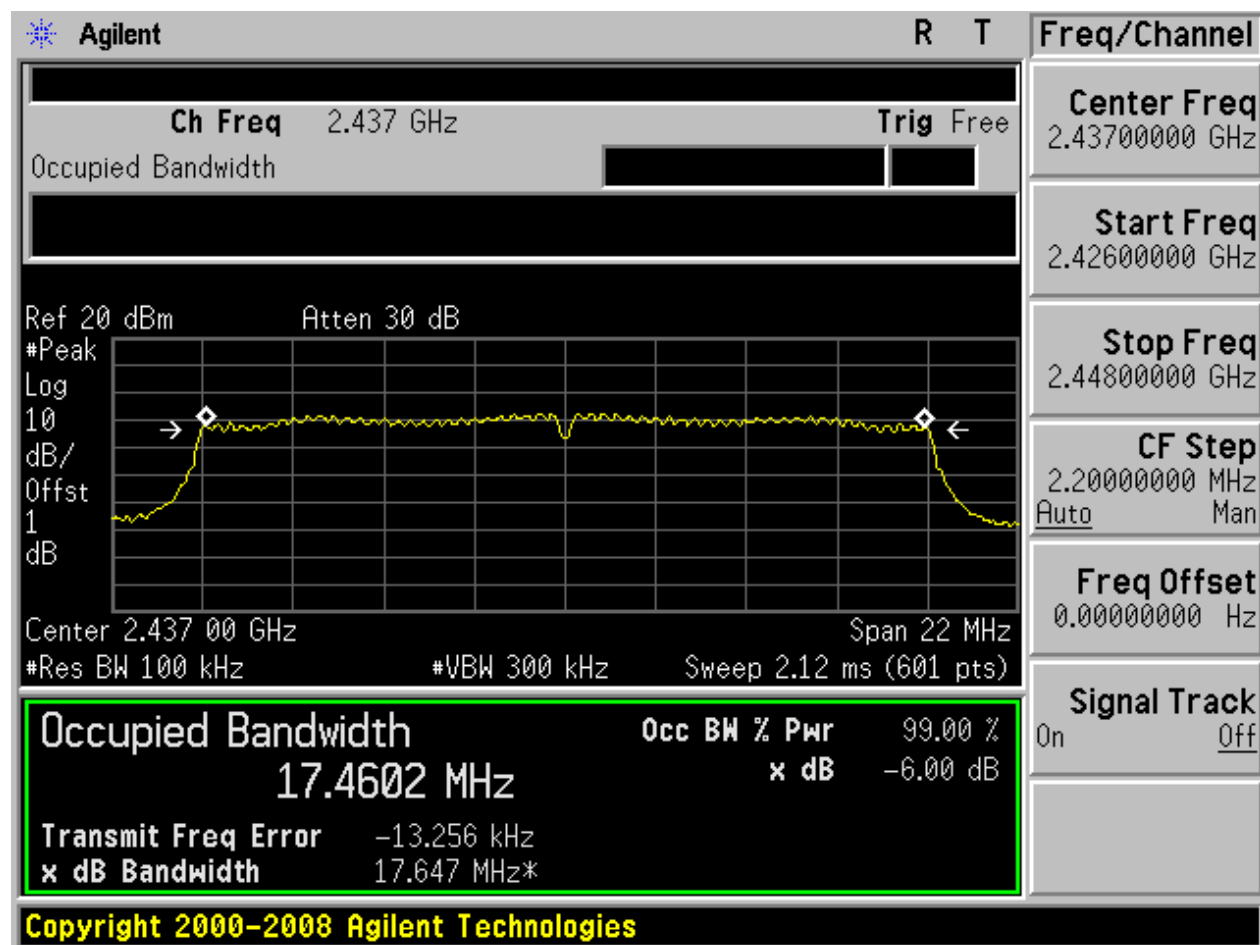




2.17 11N20m_H@Ant 1

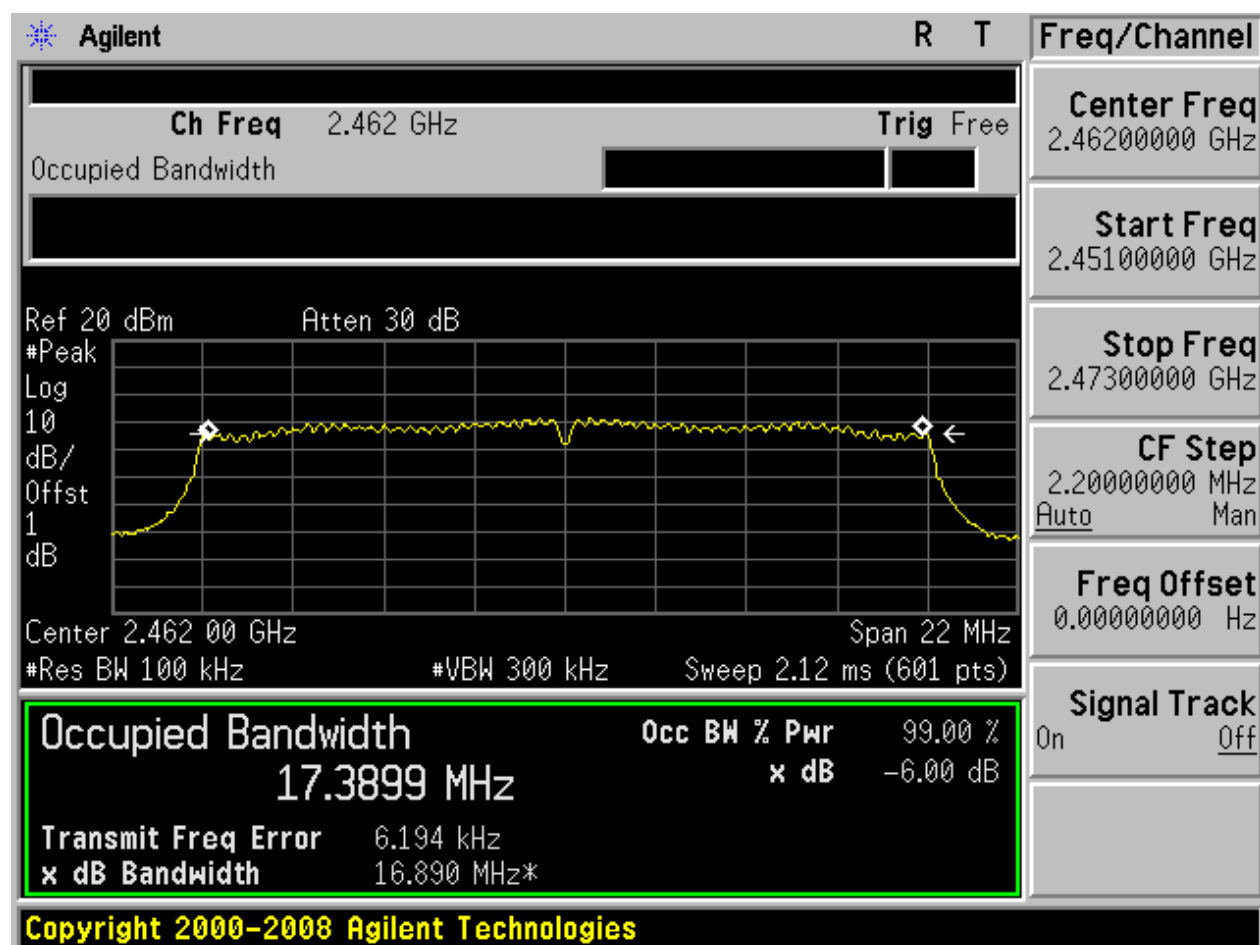




2.18 11N20m_H@Ant 2

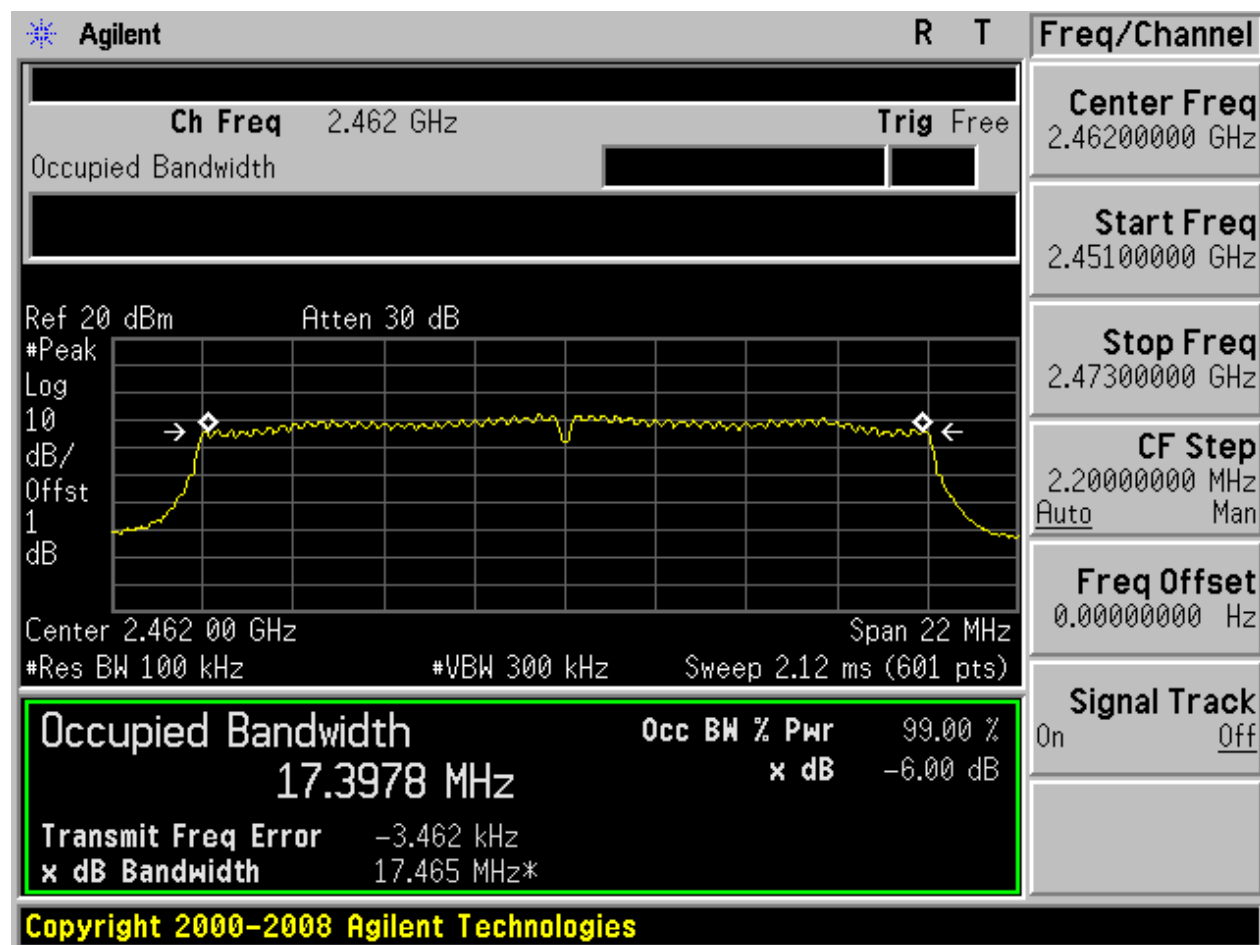




2.19 11N40_L@Ant 1

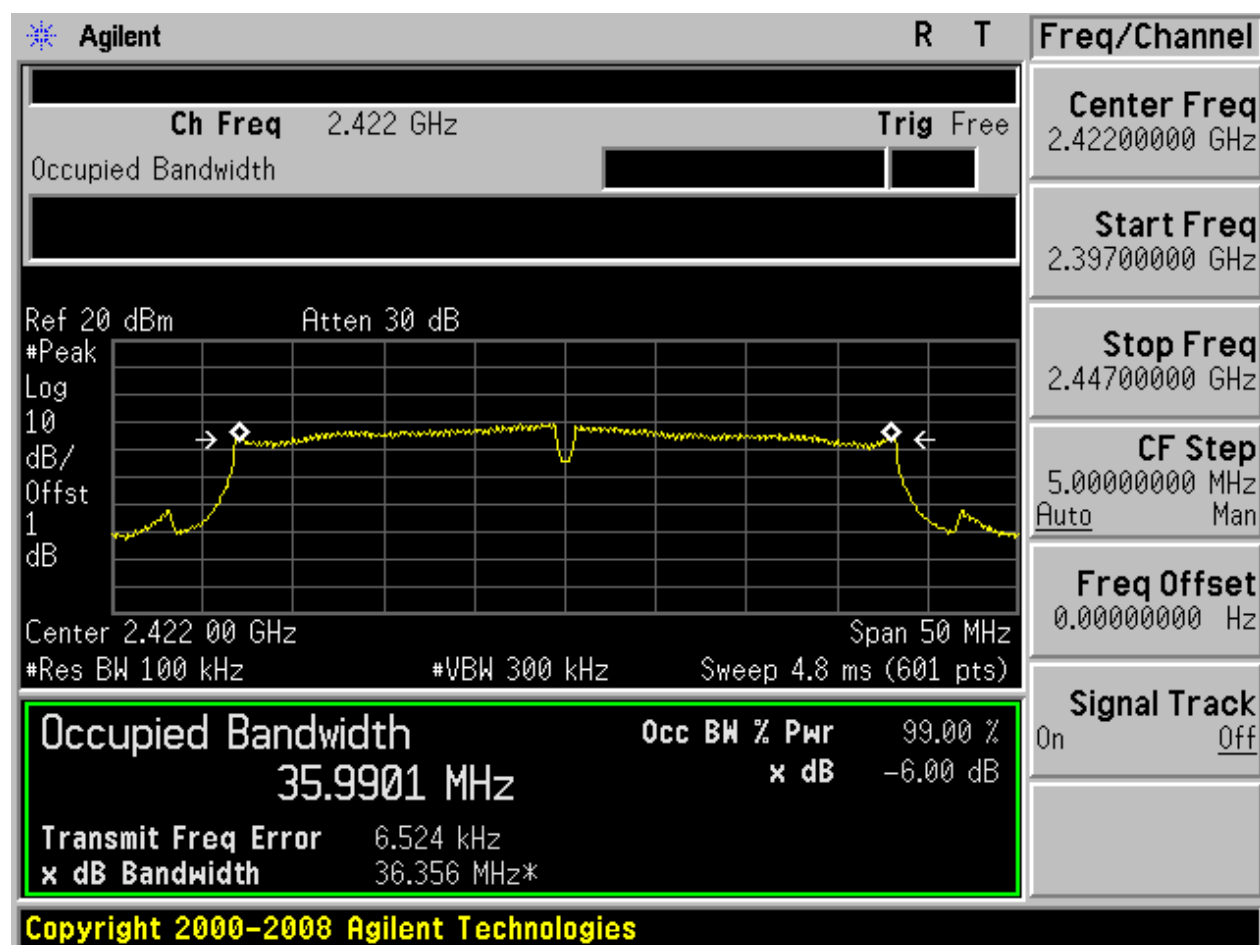




2.20 11N40_L@Ant 2

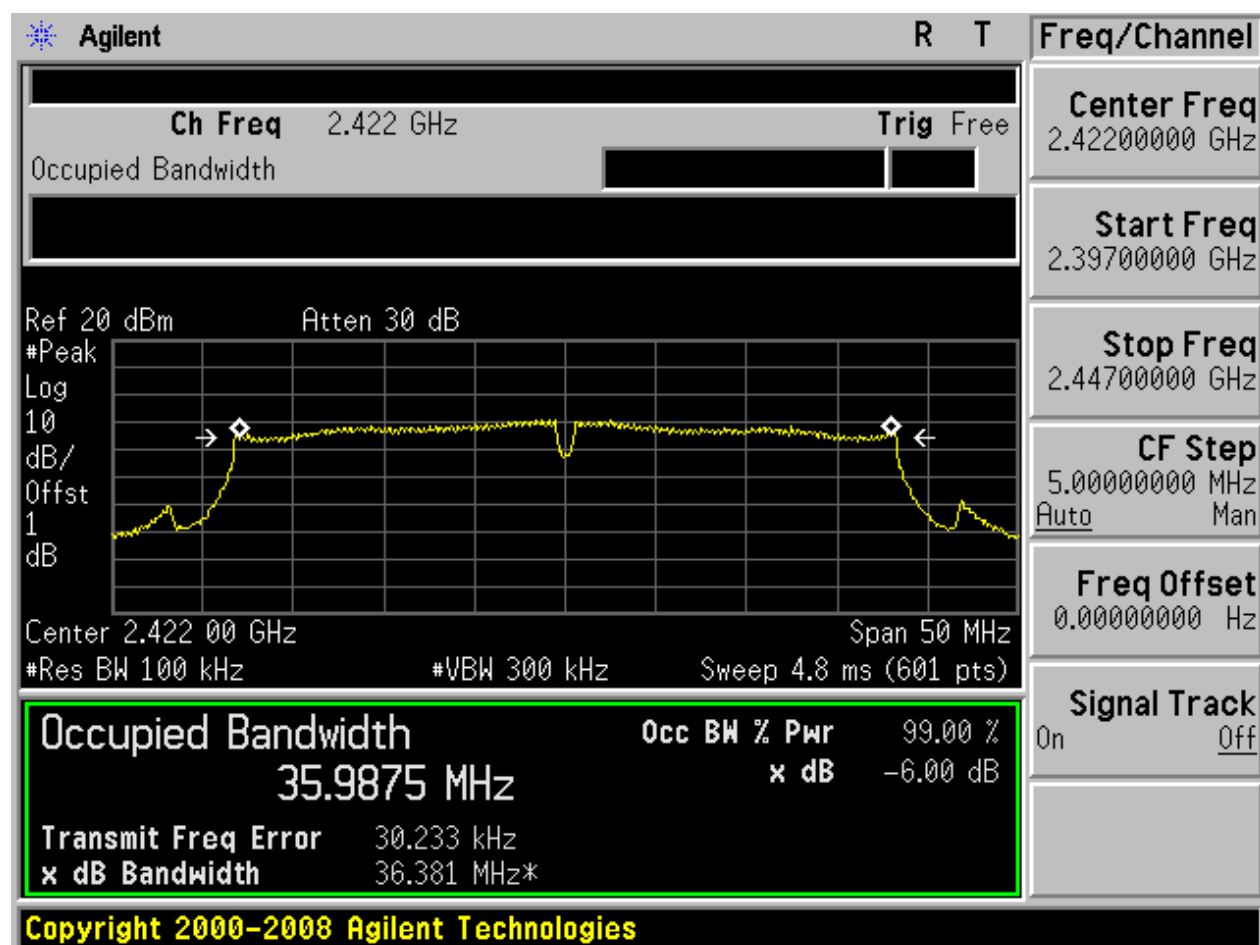





2.21 11N40_M@Ant 1

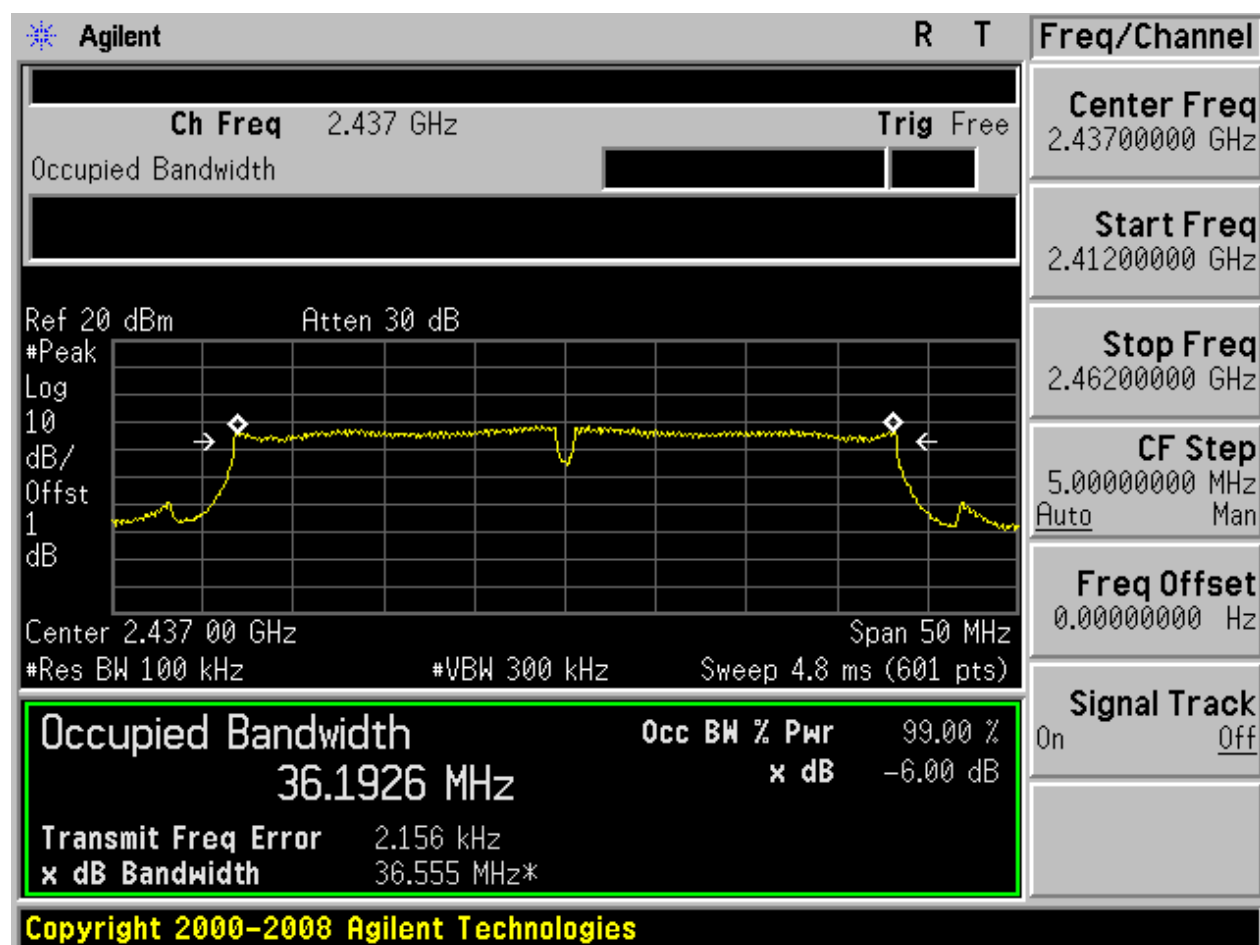

2.22 11N40_M@Ant 2

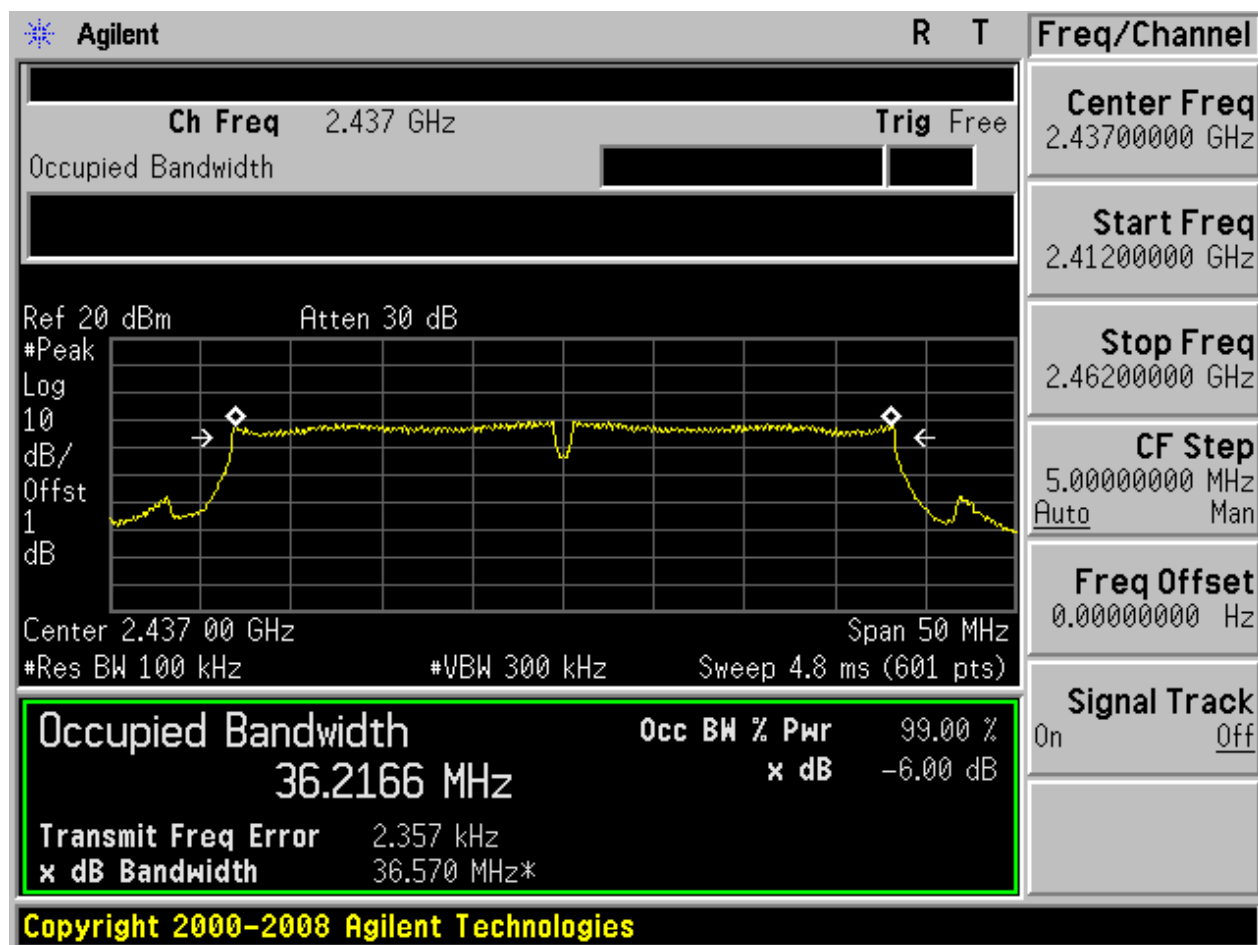


2.23 11N40_H@Ant 1

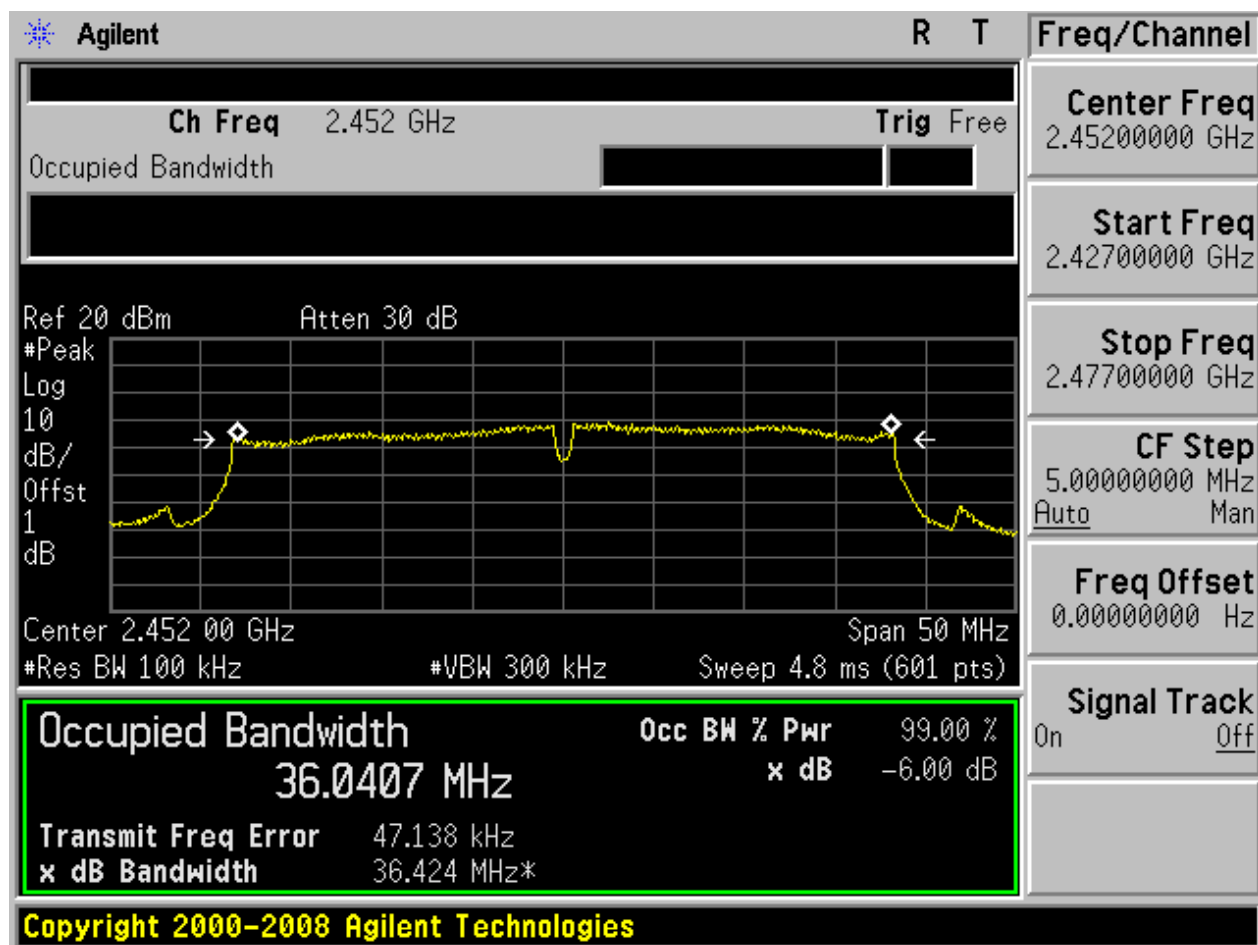




2.24 11N40_H@Ant 2

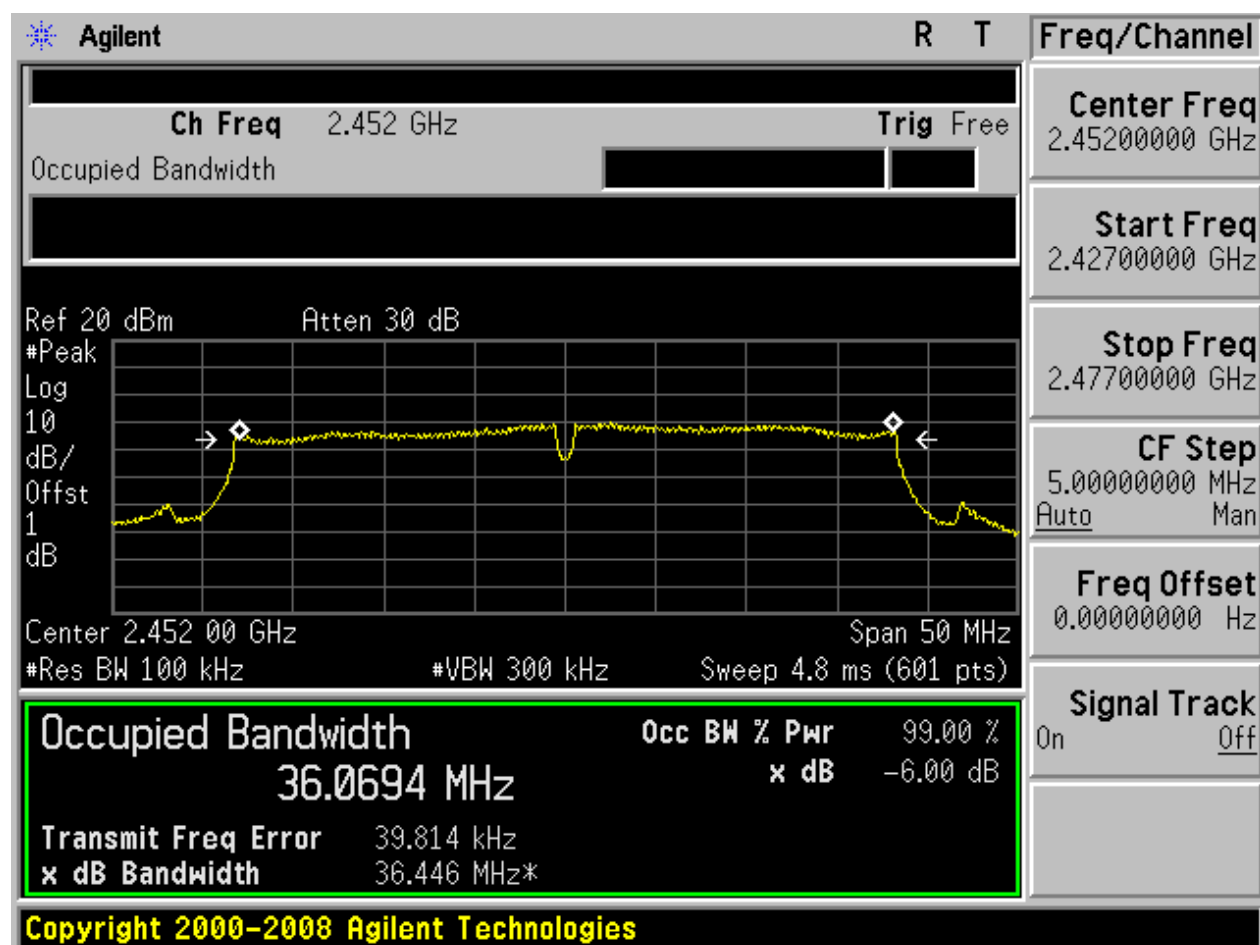




2.31 11N40m_L@Ant 1

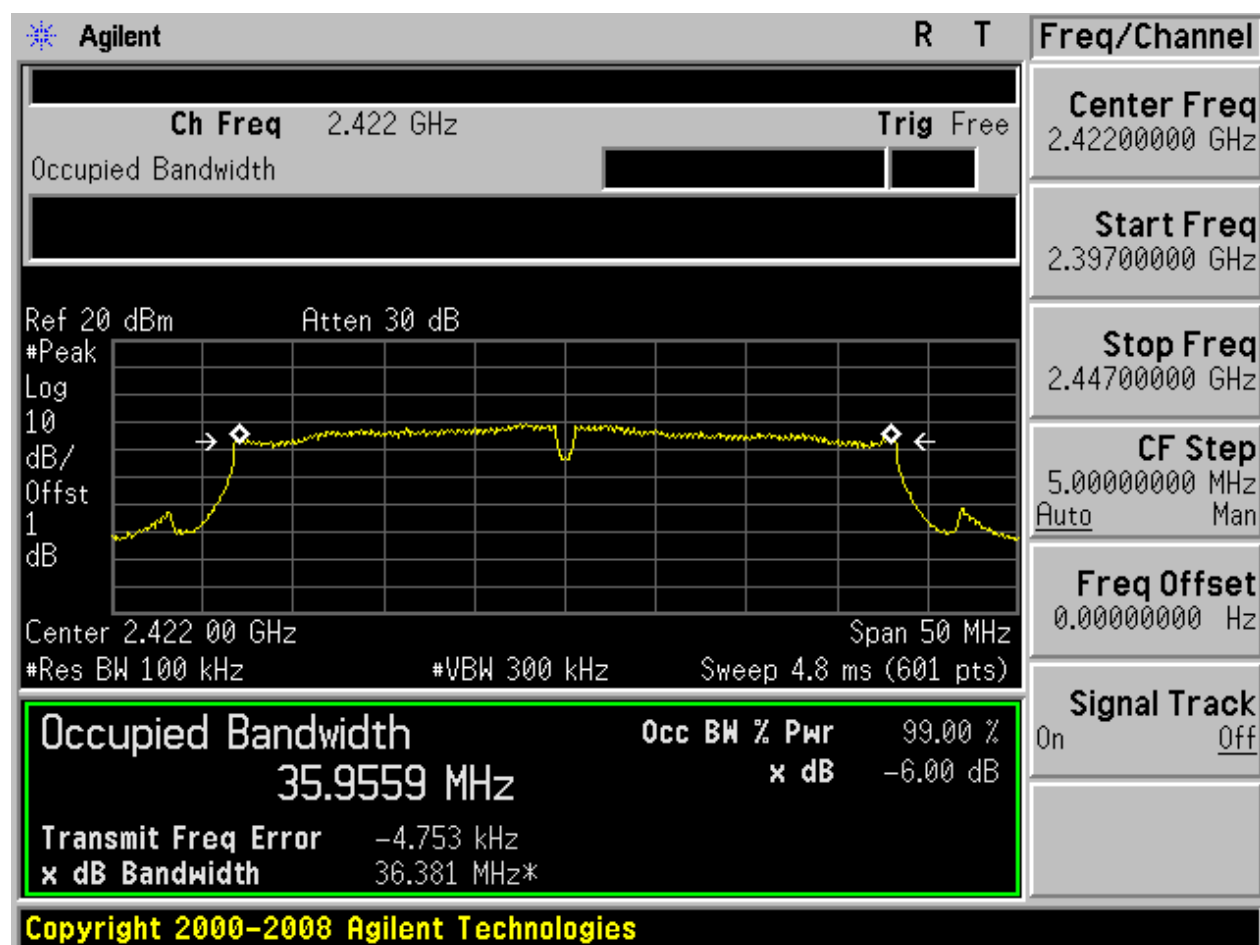




2.32 11N40m_L@Ant 2

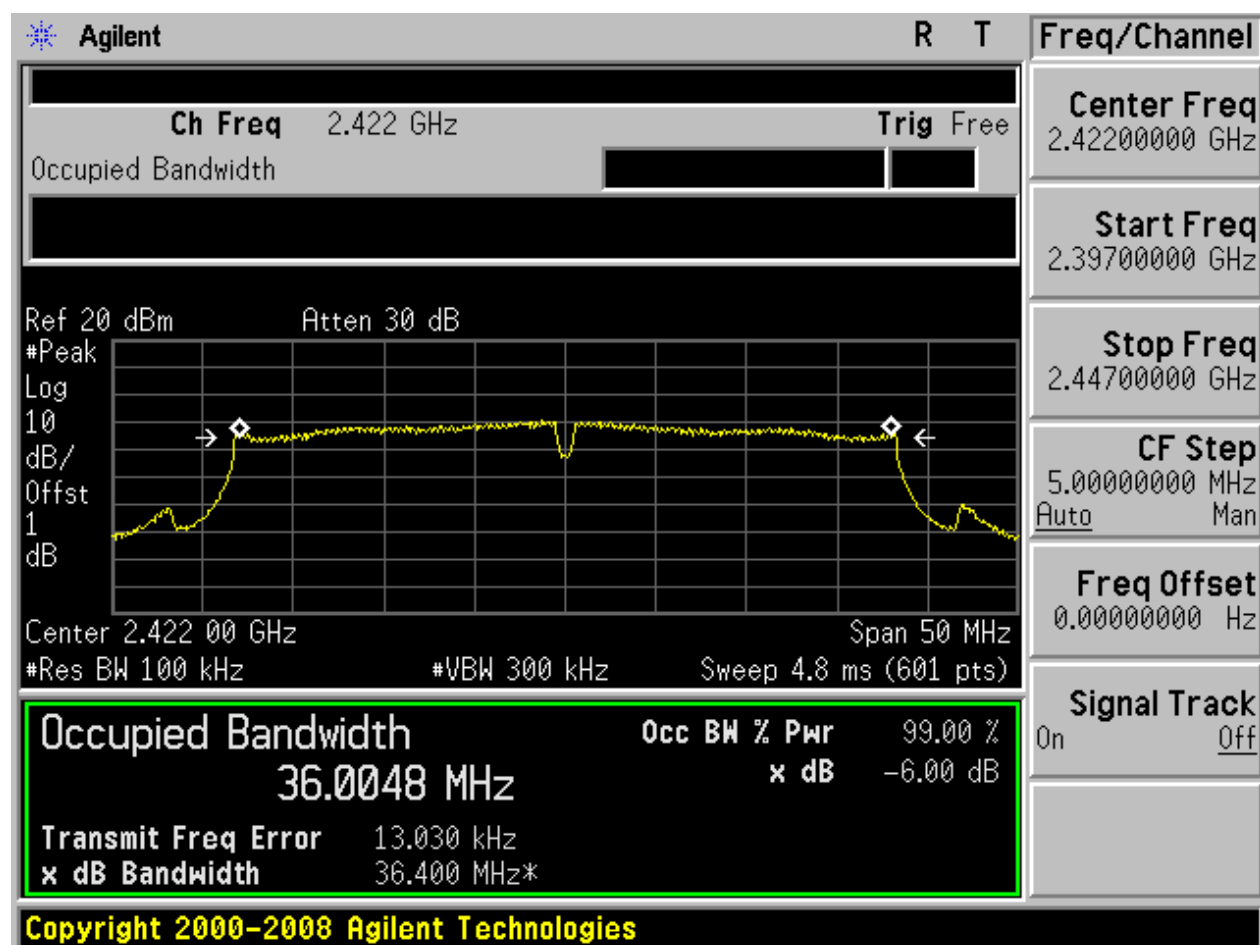


2.33 11N40m_M@Ant 1

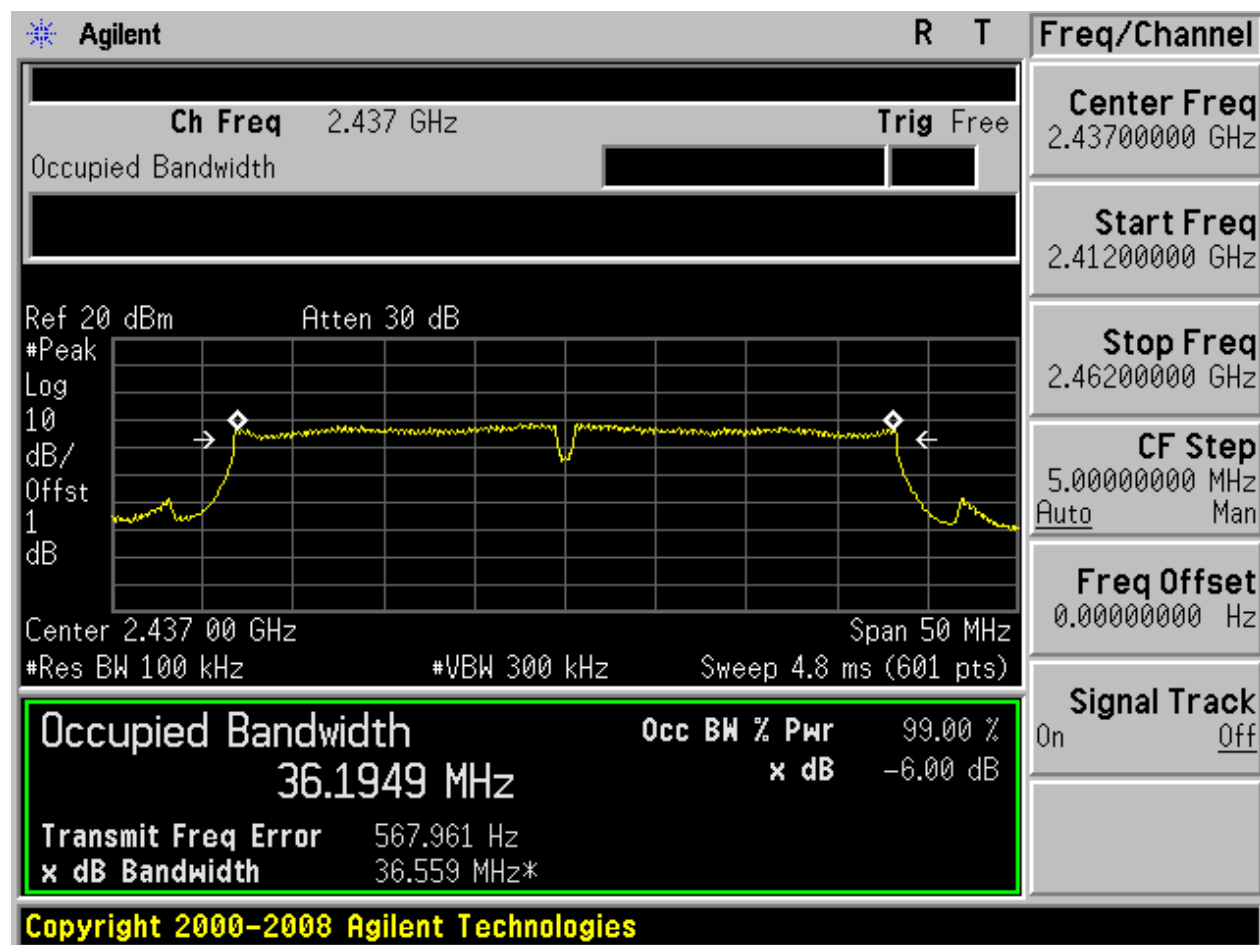




2.34 11N40m_M@Ant 2

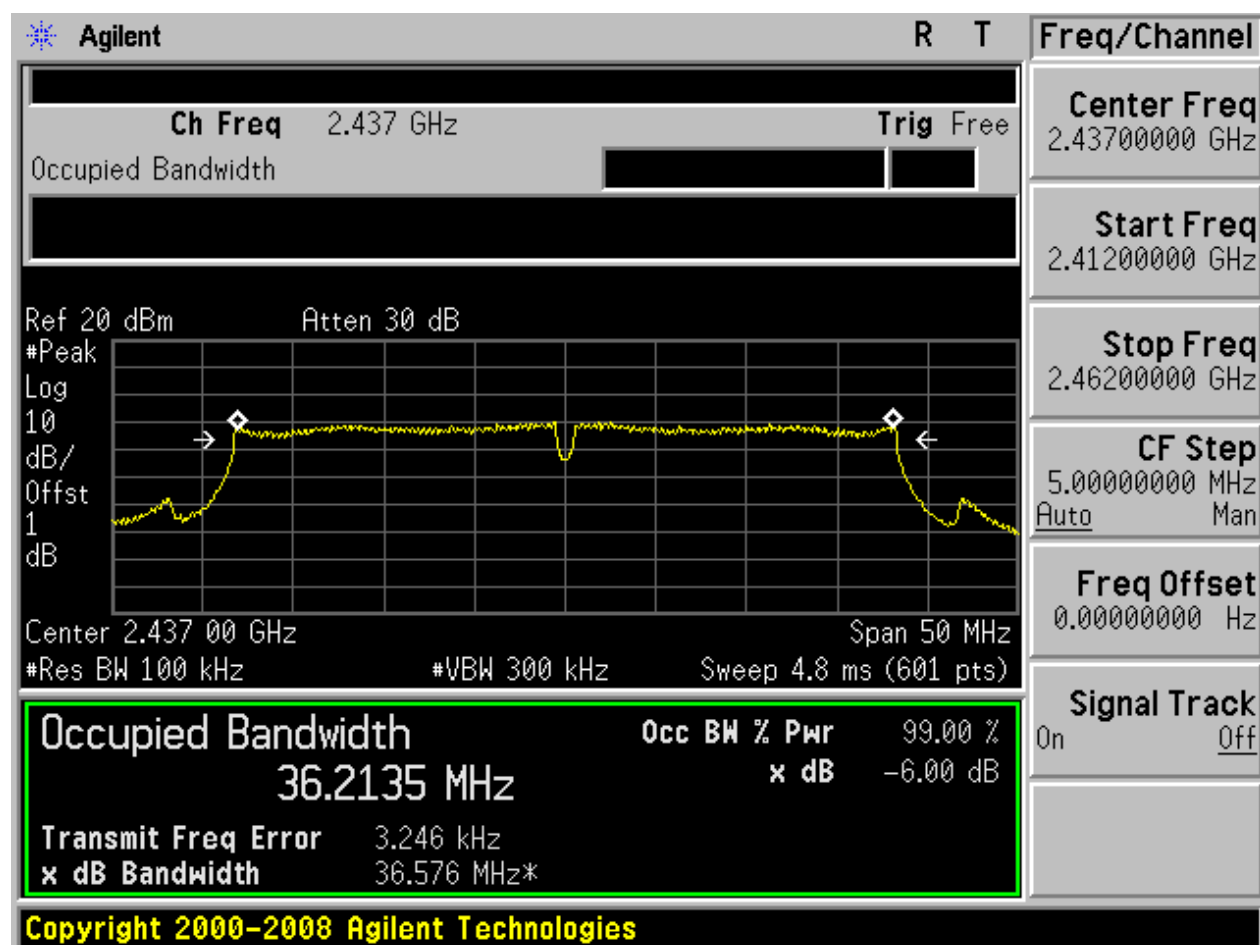




2.35 11N40m_H@Ant 1

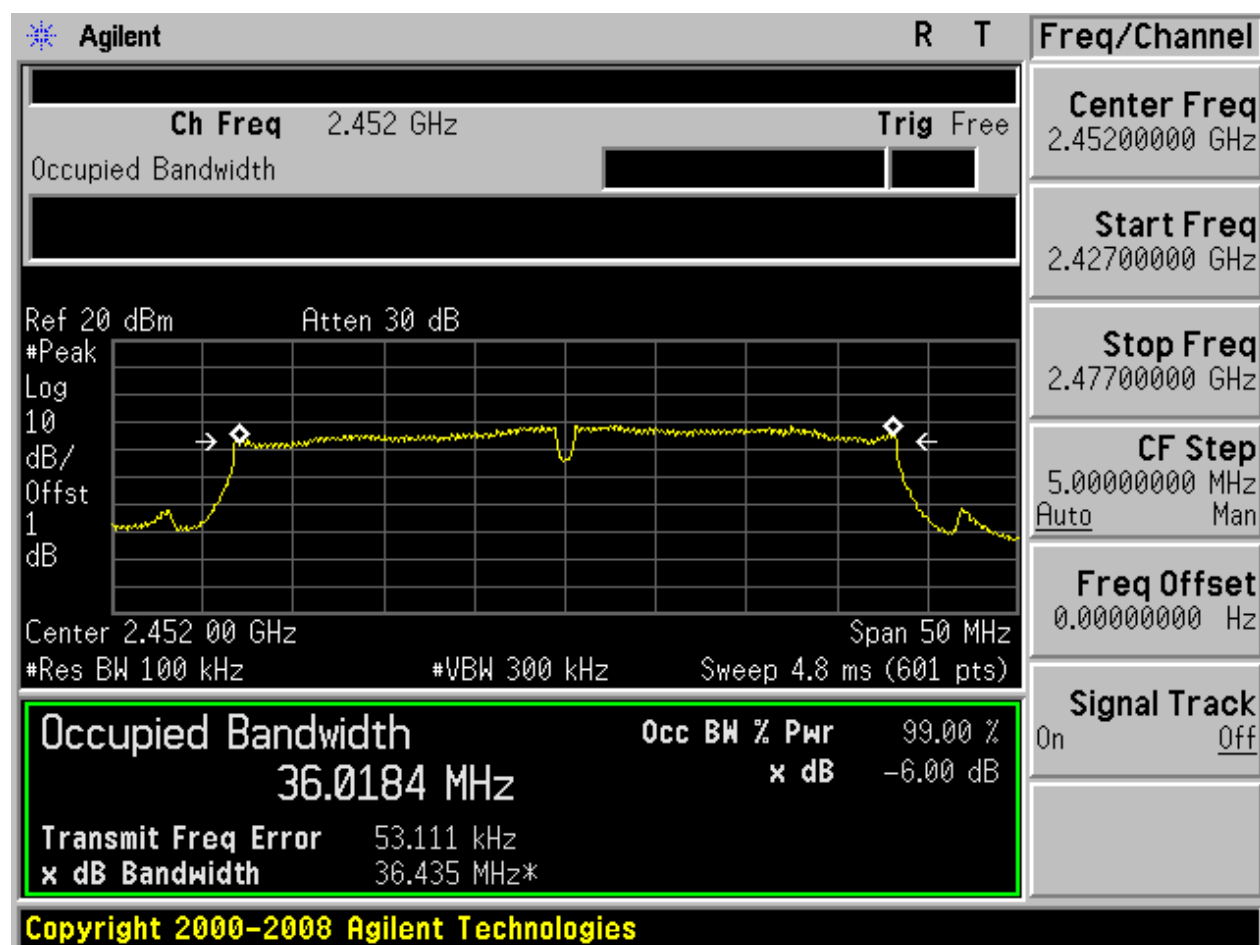



2.36 11N40m_H@Ant 2

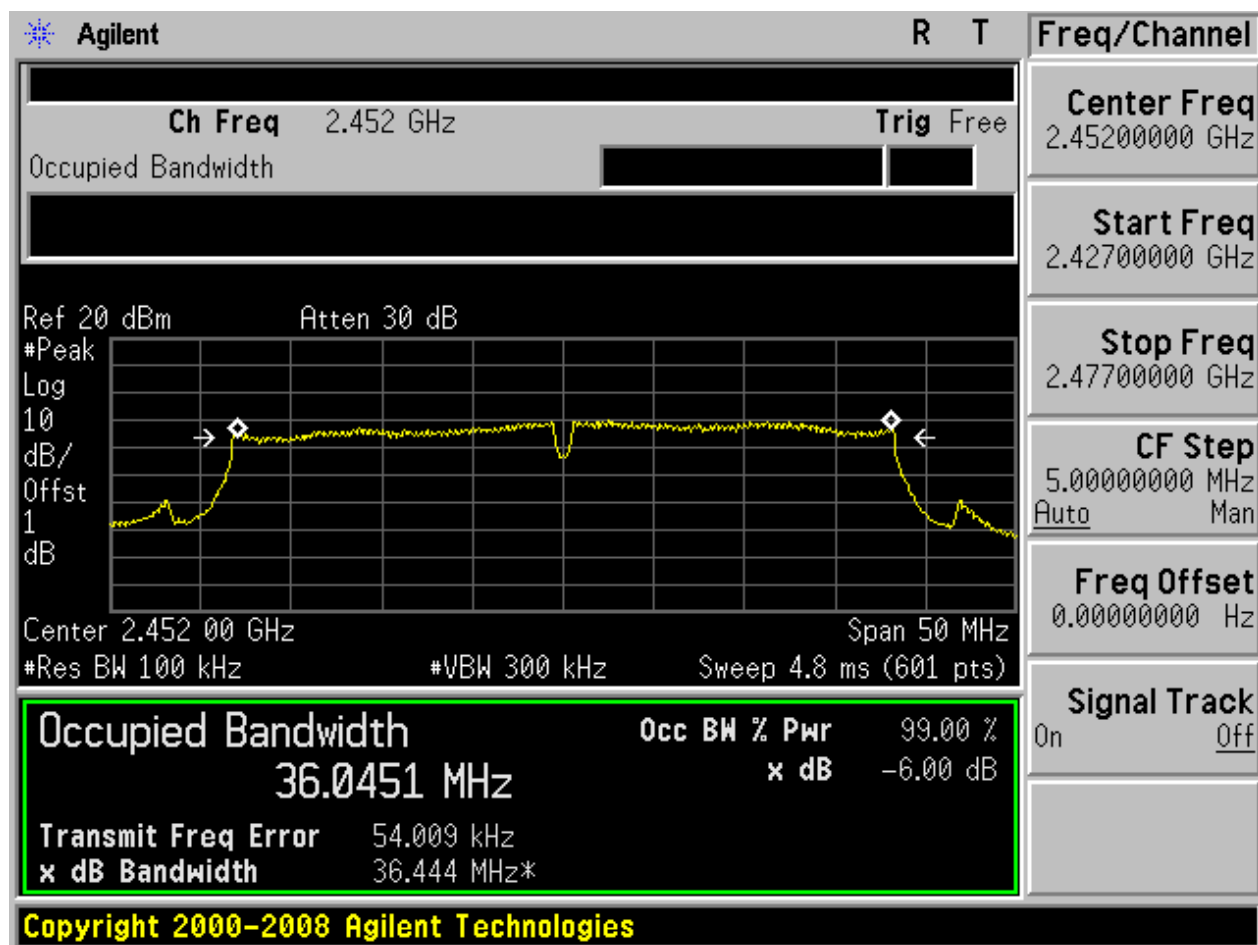

Appendix B: Occupied Bandwidth

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.

Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	Ant	Occupied Bandwidth [MHz]	Verdict
11B	L	2412	Ant 1	10.03	pass
11B	L	2412	Ant 2	10.01	pass
11B	M	2437	Ant 1	10.11	pass
11B	M	2437	Ant 2	10.13	pass
11B	H	2462	Ant 1	10.07	pass
11B	H	2462	Ant 2	10.01	pass
11G	L	2412	Ant 1	16.22	pass
11G	L	2412	Ant 2	16.23	pass
11G	M	2437	Ant 1	16.34	pass
11G	M	2437	Ant 2	16.34	pass
11G	H	2462	Ant 1	16.25	pass
11G	H	2462	Ant 2	16.24	pass
11N20	L	2412	Ant 1	17.40	pass
11N20	L	2412	Ant 2	17.40	pass
11N20	M	2437	Ant 1	17.44	pass
11N20	M	2437	Ant 2	17.48	pass
11N20	H	2462	Ant 1	17.39	pass
11N20	H	2462	Ant 2	17.40	pass
11N20m	L	2412	Ant 1	17.35	pass
11N20m	L	2412	Ant 2	17.39	pass
11N20m	M	2437	Ant 1	17.45	pass
11N20m	M	2437	Ant 2	17.46	pass
11N20m	H	2462	Ant 1	17.41	pass
11N20m	H	2462	Ant 2	17.44	pass
11N40	L	2422	Ant 1	35.93	pass
11N40	L	2422	Ant 2	36.02	pass
11N40	M	2437	Ant 1	36.14	pass
11N40	M	2437	Ant 2	36.25	pass
11N40	H	2452	Ant 1	35.99	pass
11N40	H	2452	Ant 2	36.12	pass
11N40m	L	2422	Ant 1	35.96	pass
11N40m	L	2422	Ant 2	36.00	pass
11N40m	M	2437	Ant 1	36.22	pass
11N40m	M	2437	Ant 2	36.24	pass




Test Mode	Test Channel	Frequency[MHz]	Ant	Occupied Bandwidth [MHz]	Verdict
11N40m	H	2452	Ant 1	36.03	pass
11N40m	H	2452	Ant 2	36.01	pass

Part II - Test Plots


2.1 11B_L@Ant 1

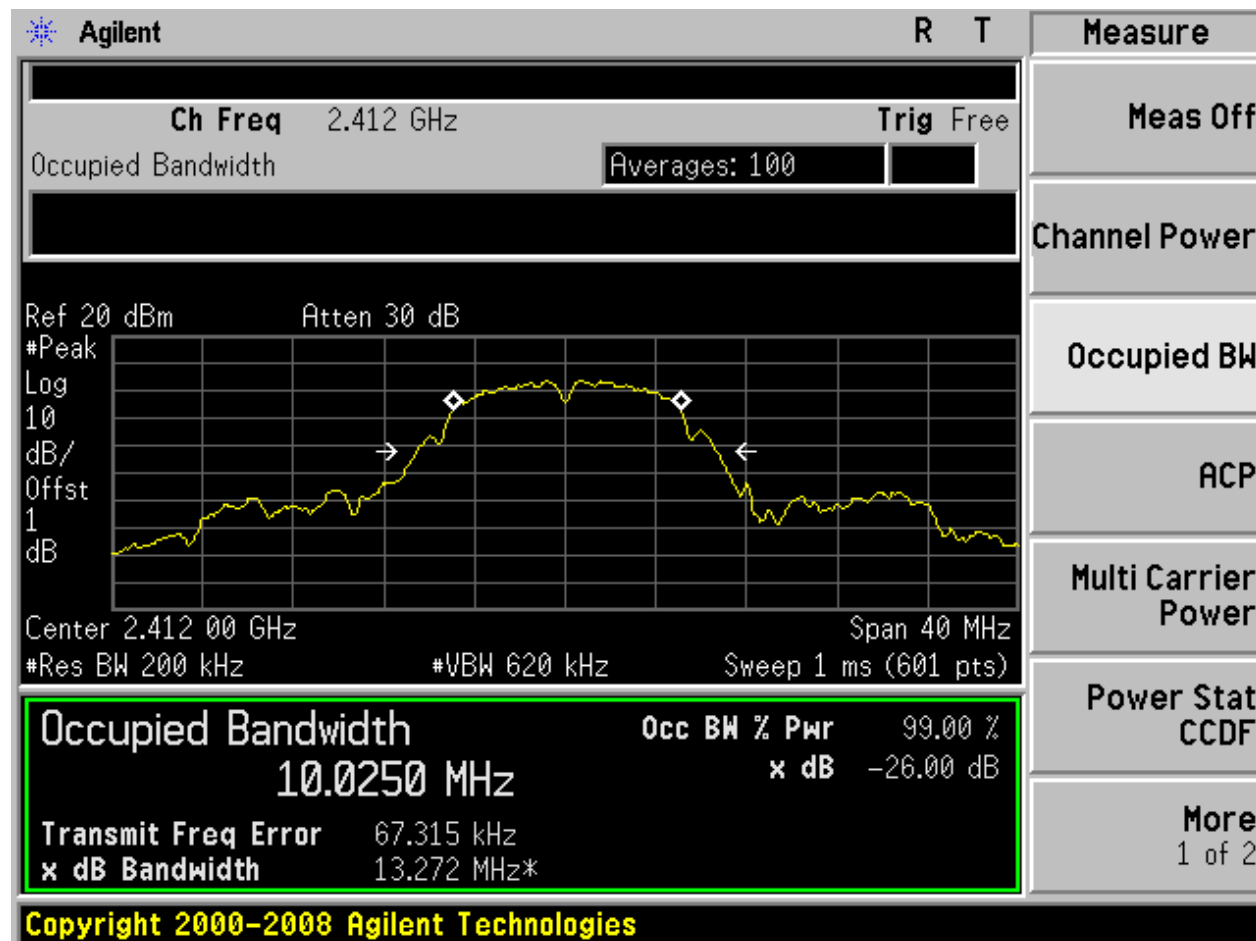


2.2 11B_L@Ant 2

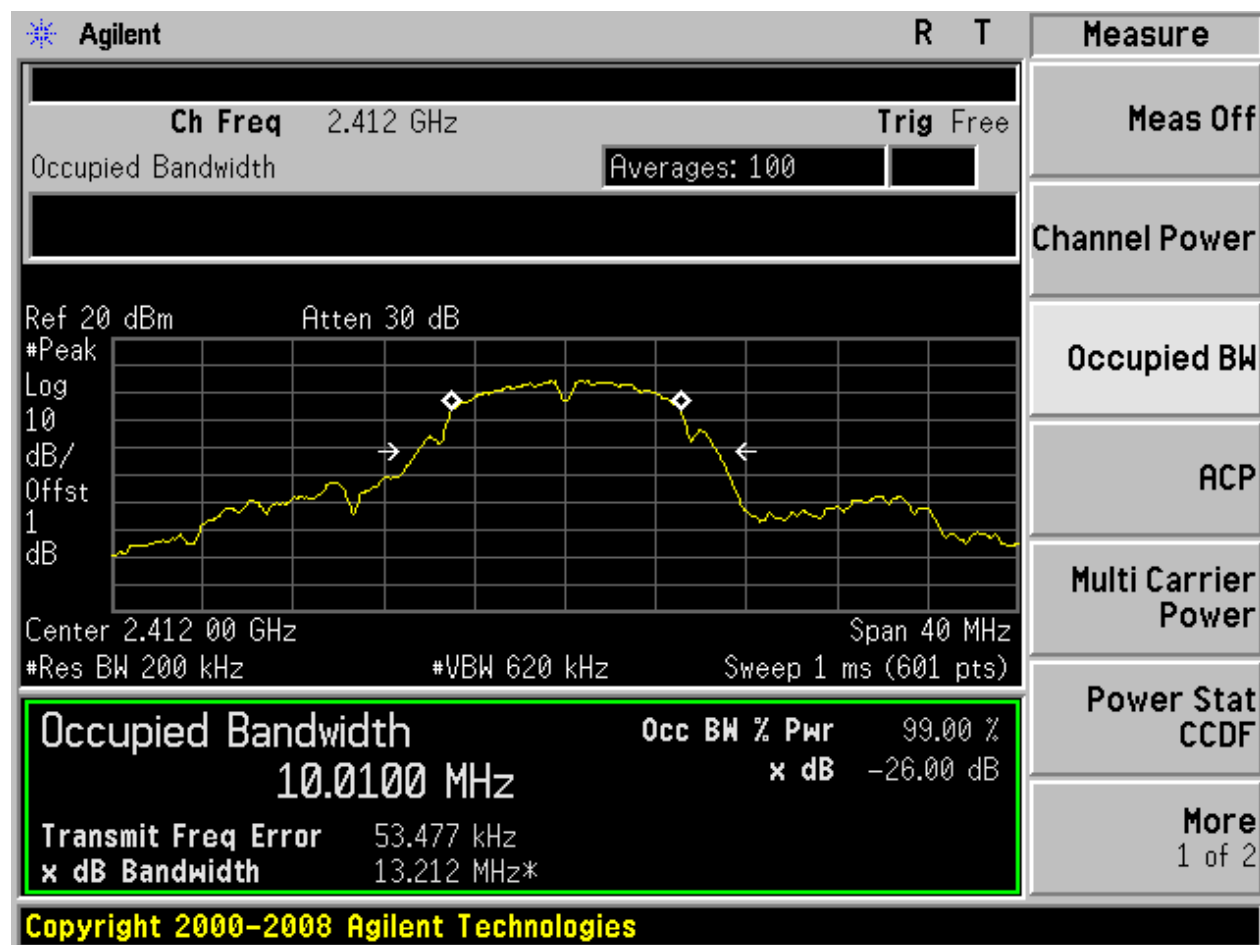


2.3 11B_M@Ant 1

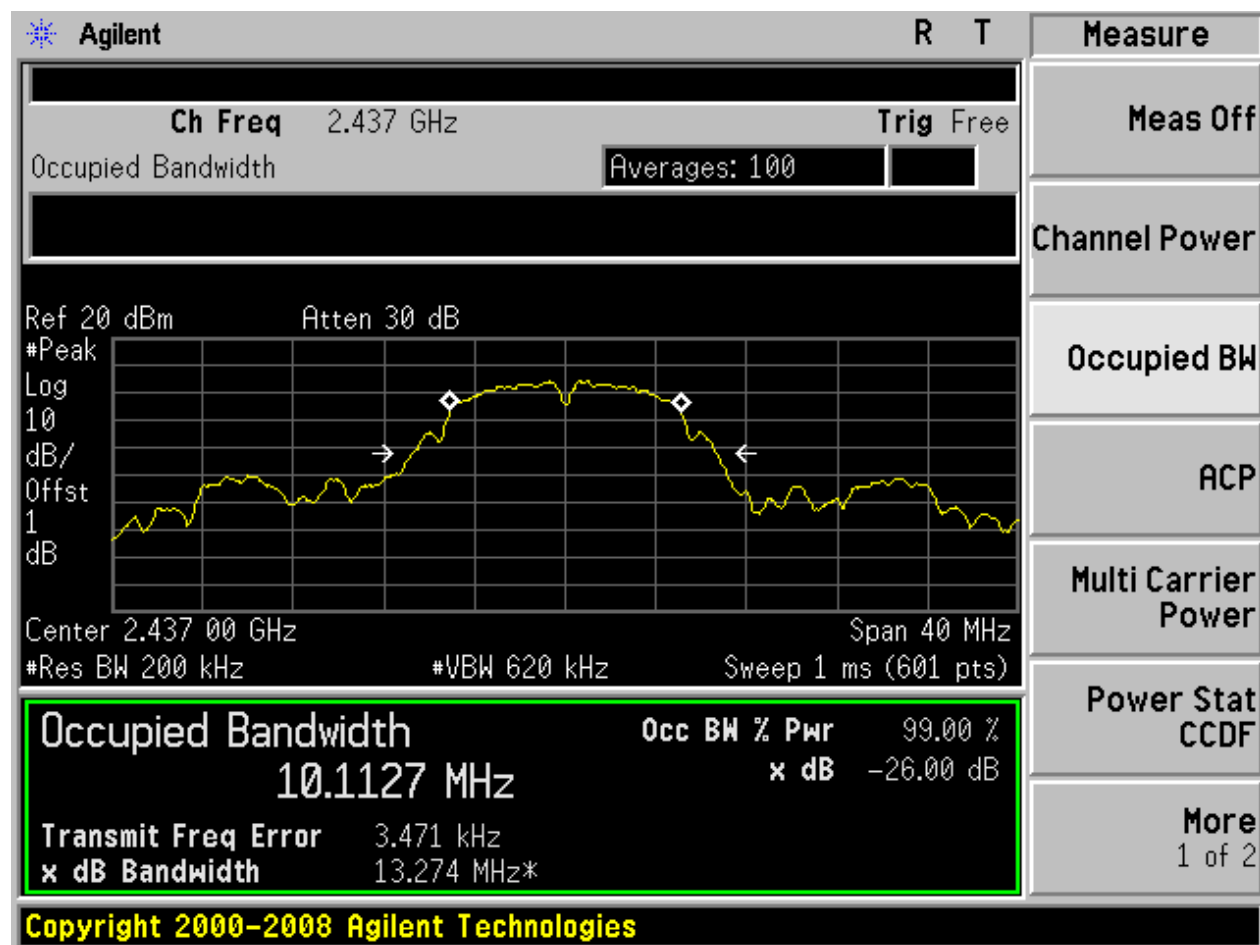


2.4 11B_M@Ant 2

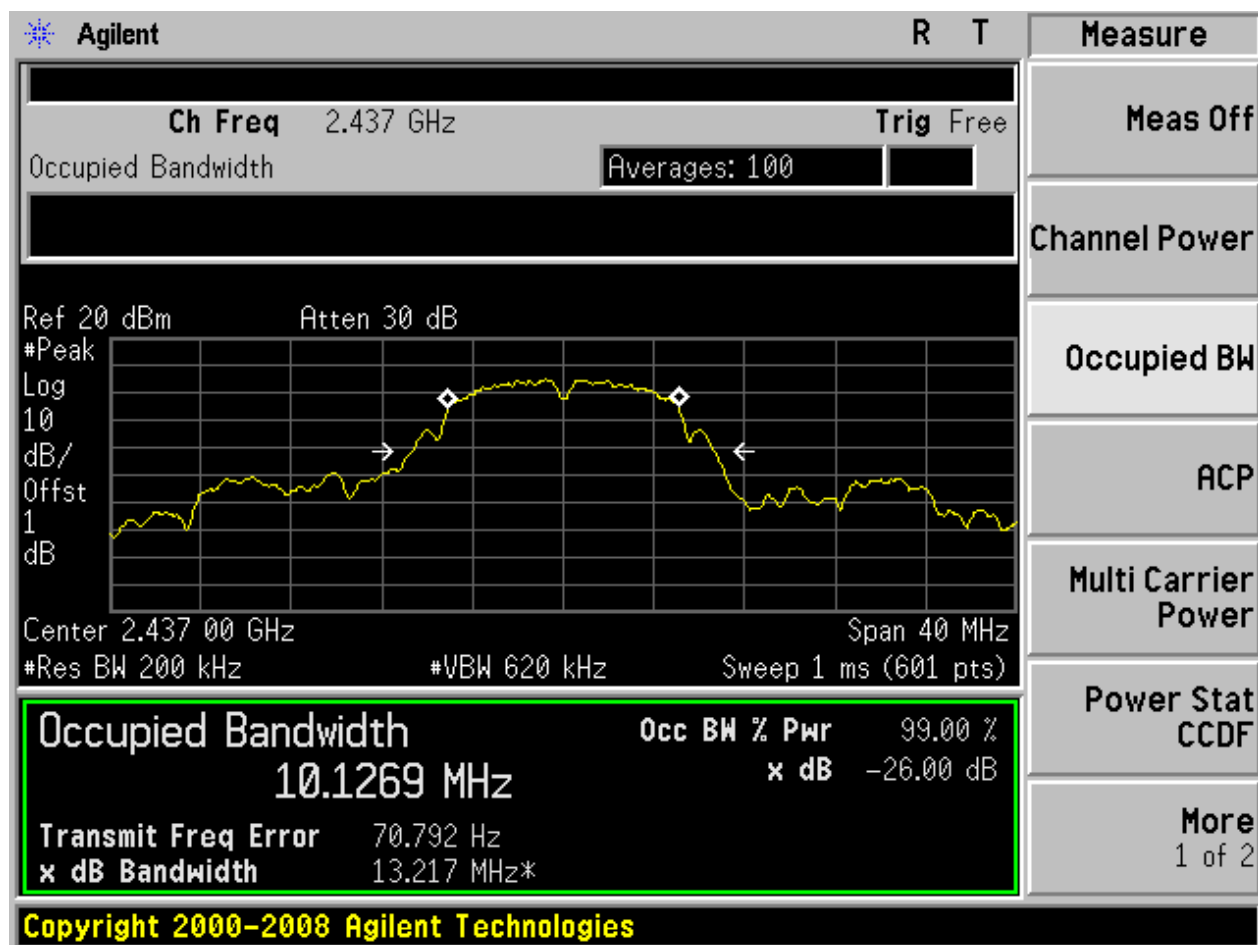


2.5 11B_H@Ant 1

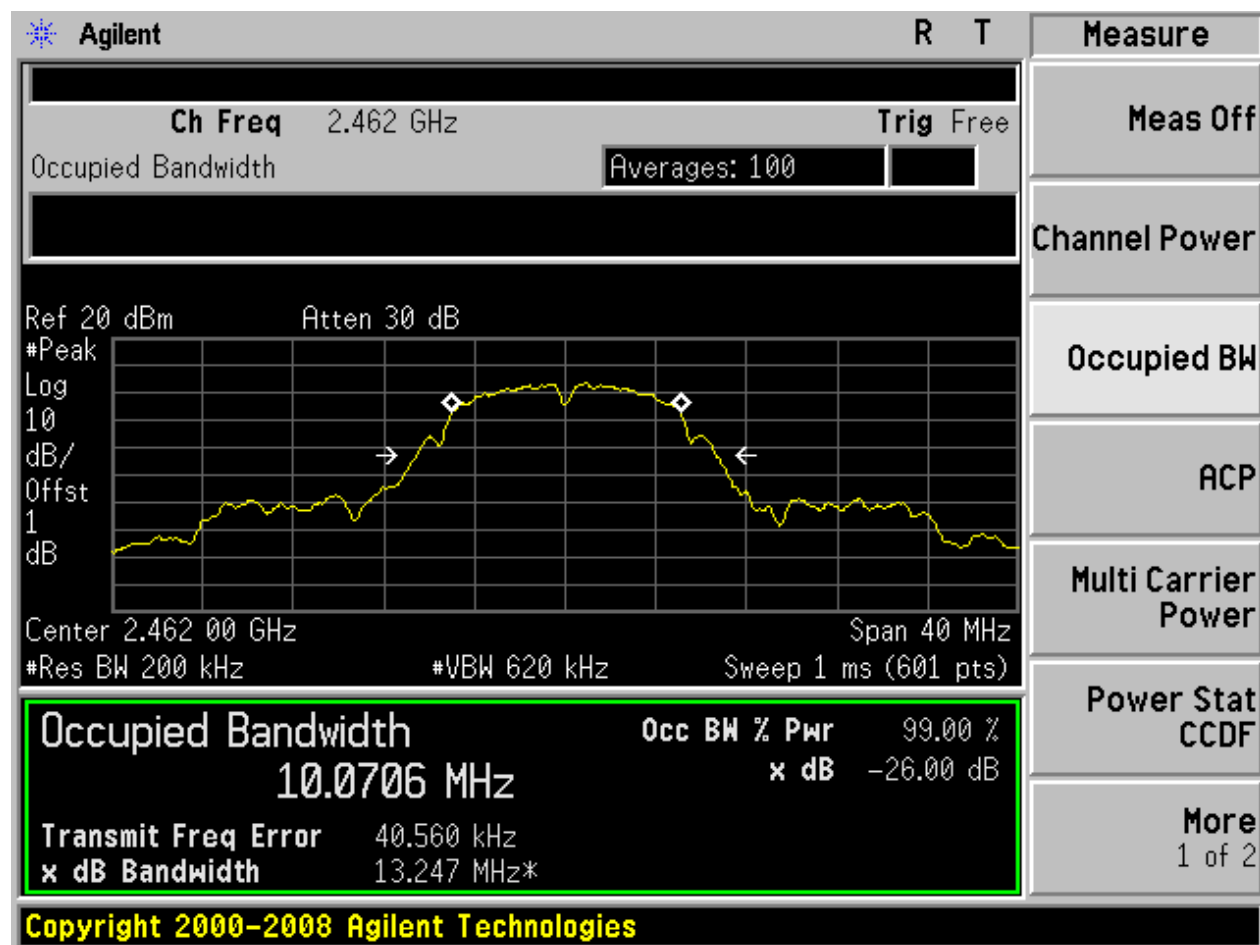


2.6 11B_H@Ant 2

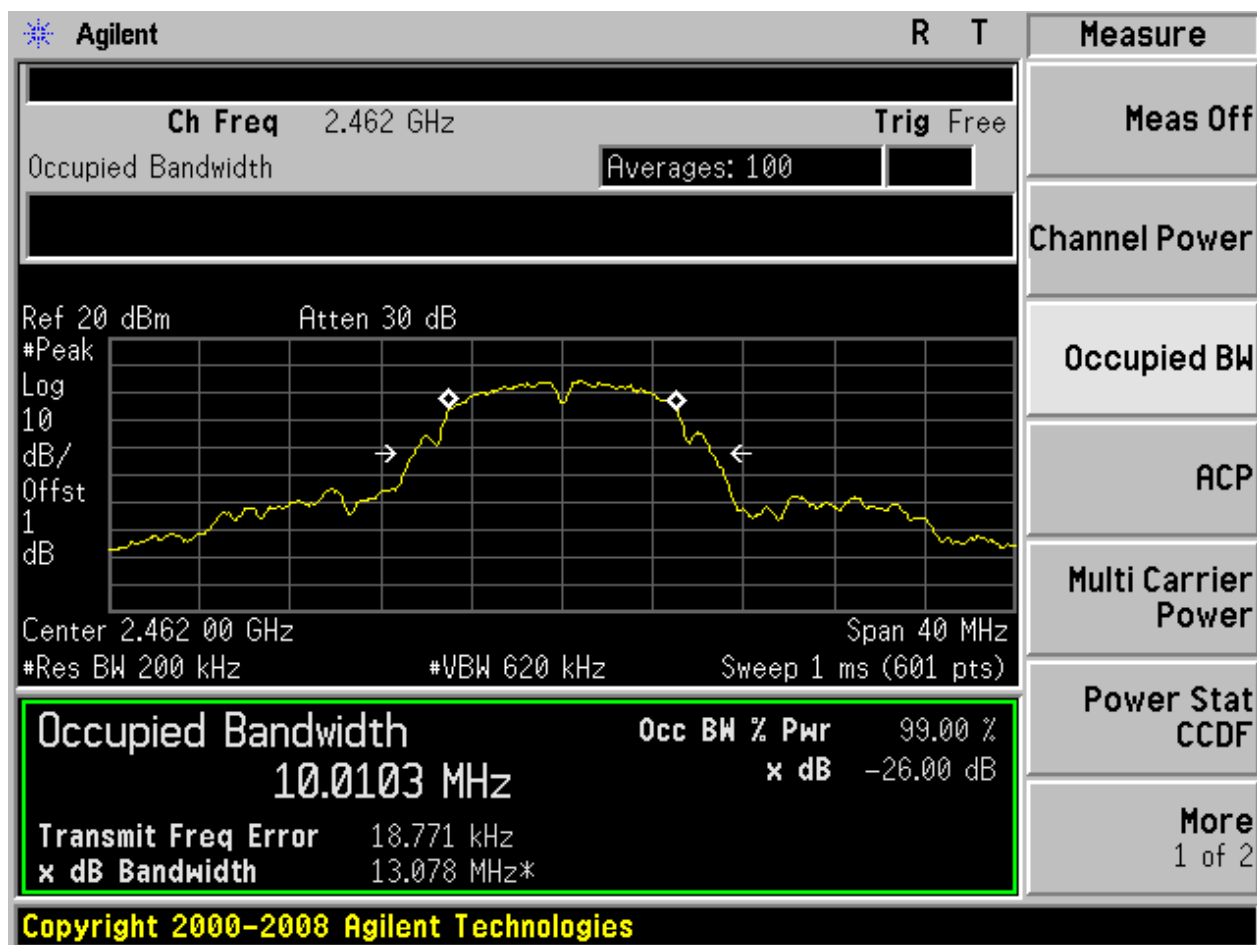


2.7 11G_L@Ant 1

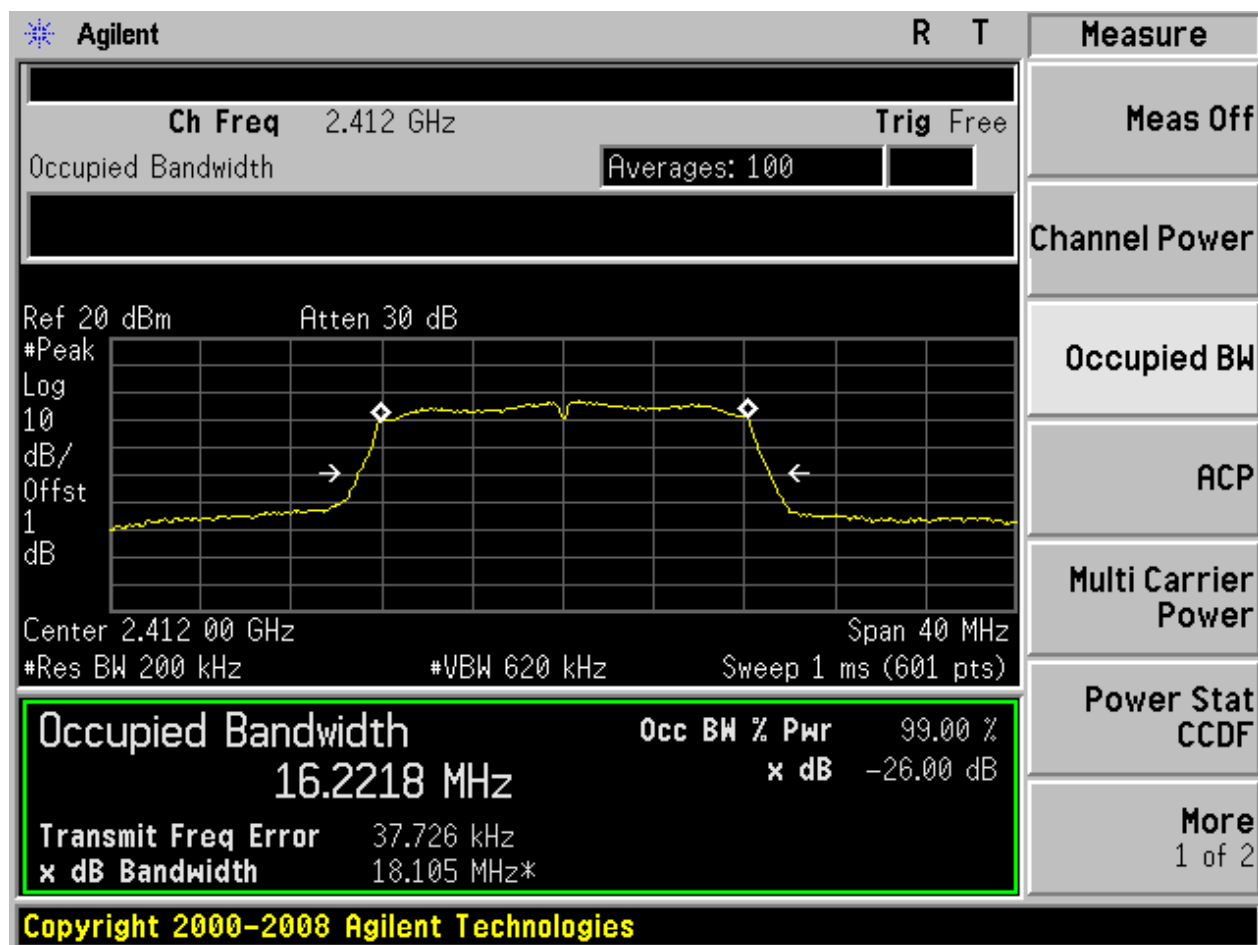


2.8 11G_L@Ant 2

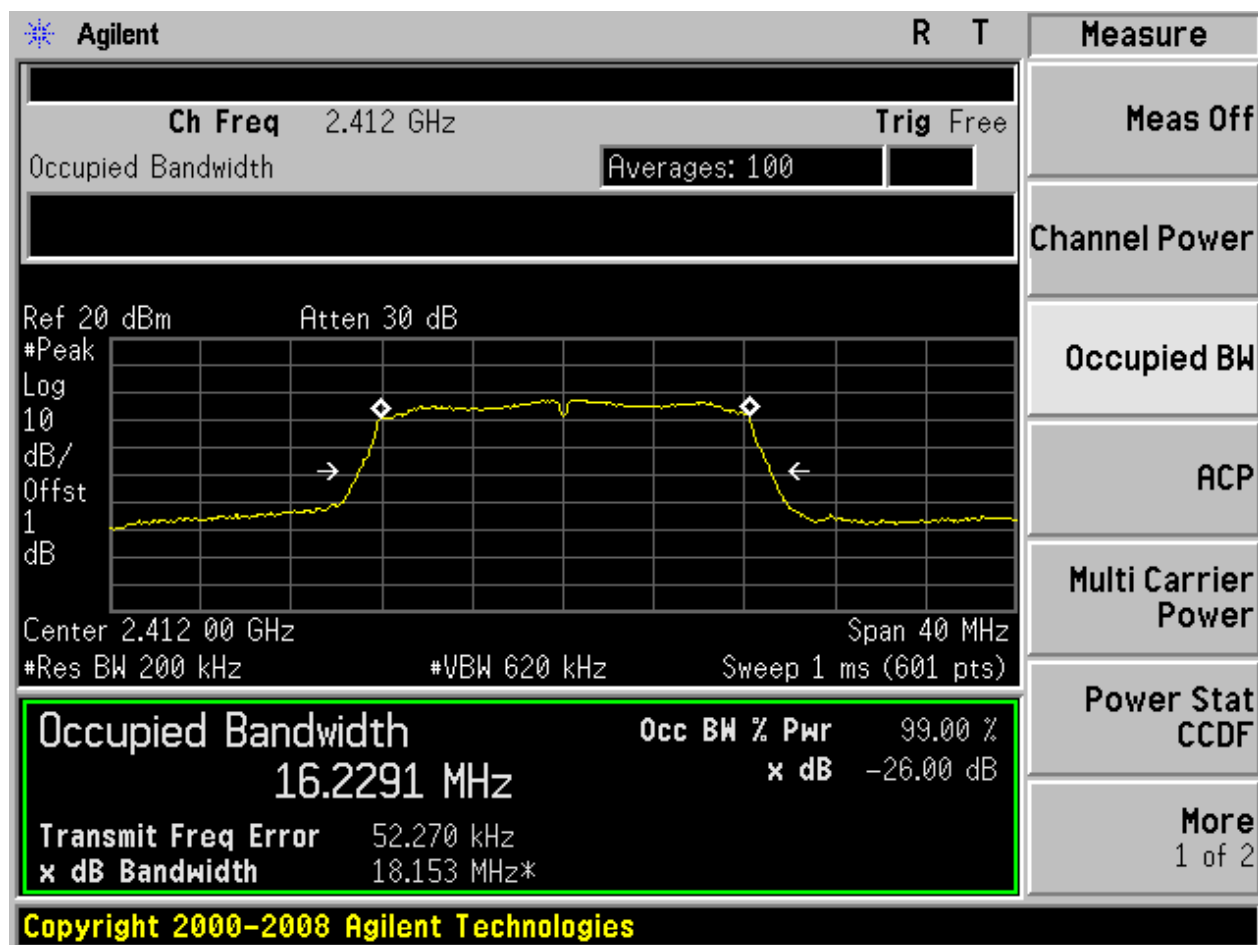


2.9 11G_M@Ant 1

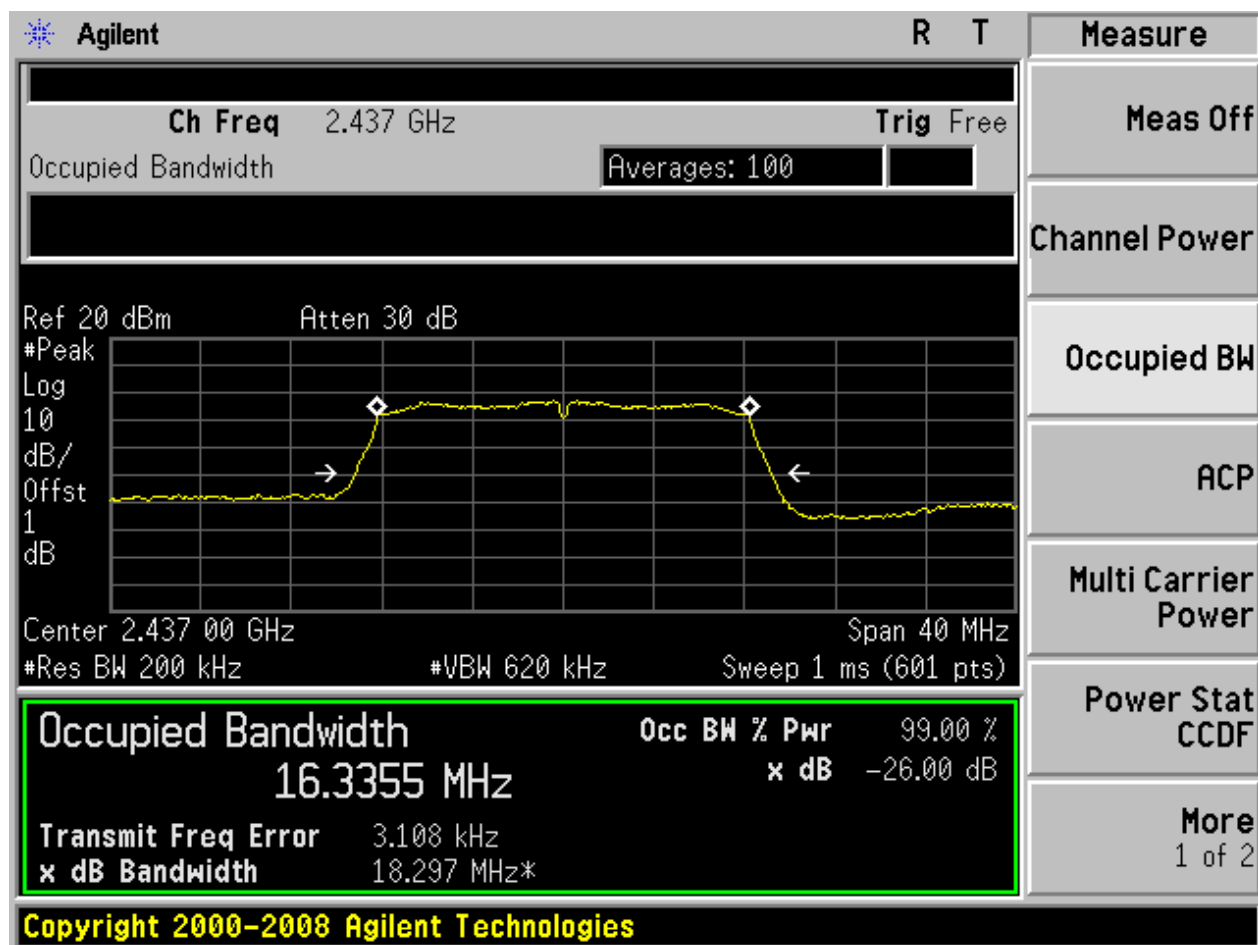


2.10 11G_M@Ant 2

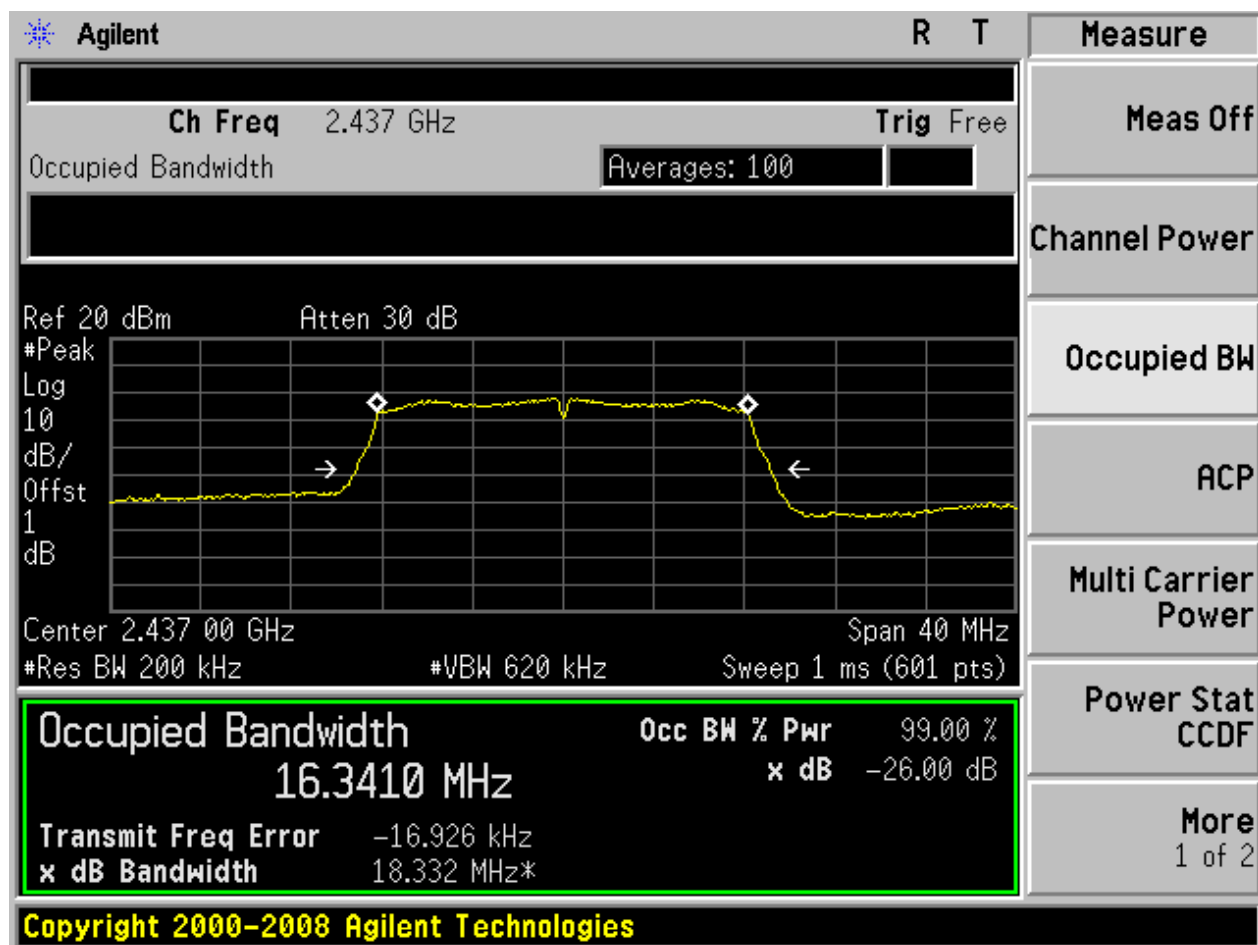


2.11 11G_H@Ant 1

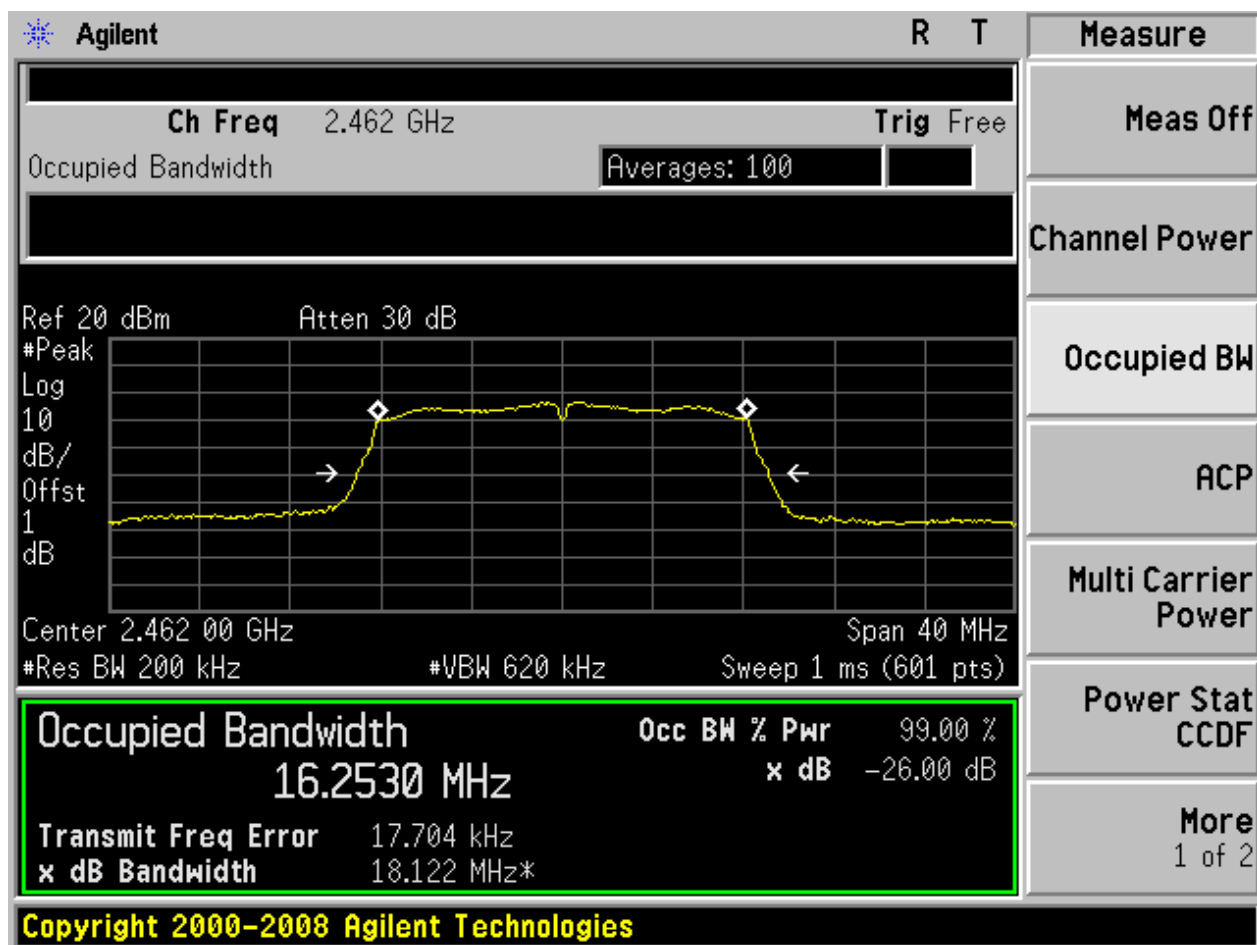


2.12 11G_H@Ant 2

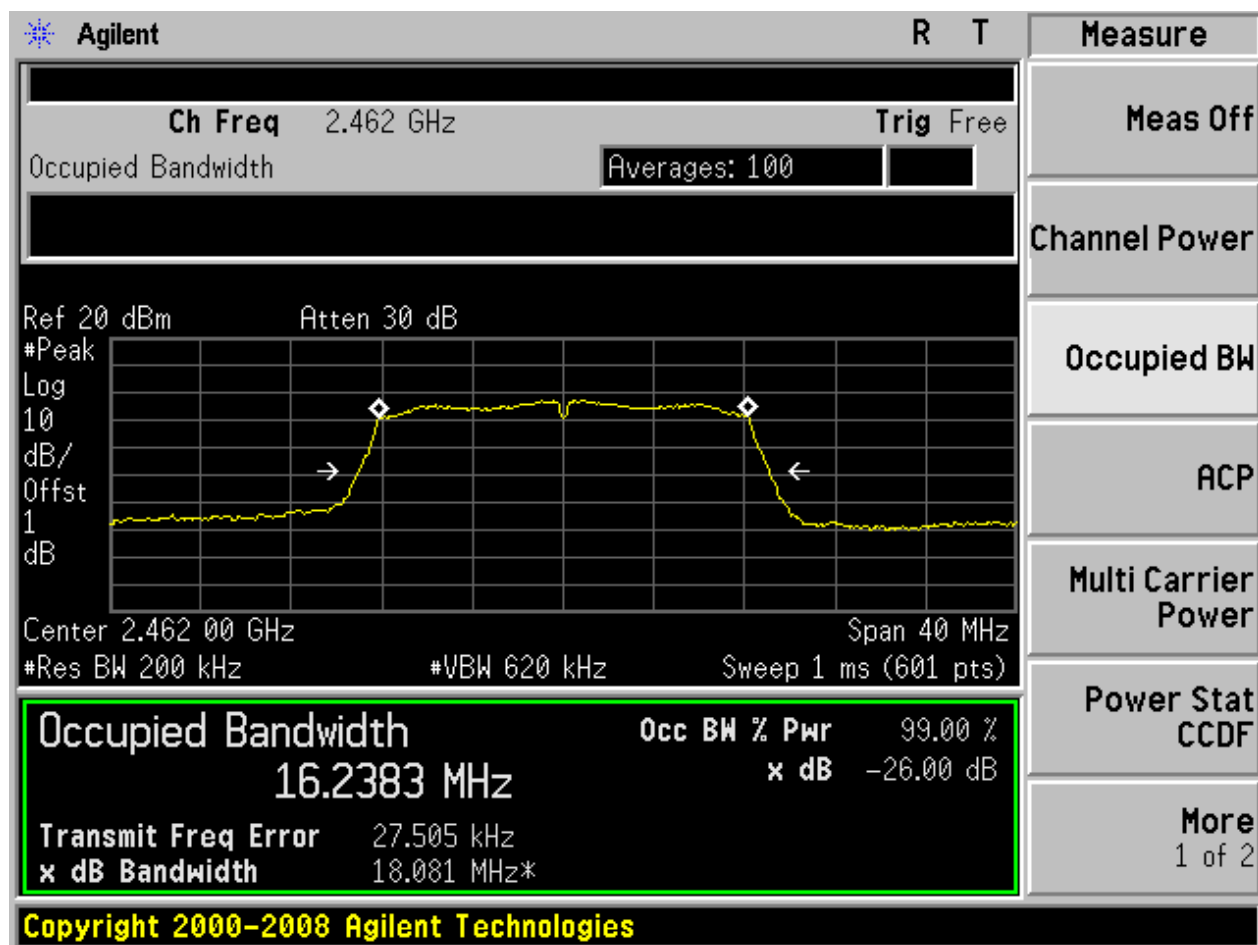


2.13 11N20_L@Ant 1

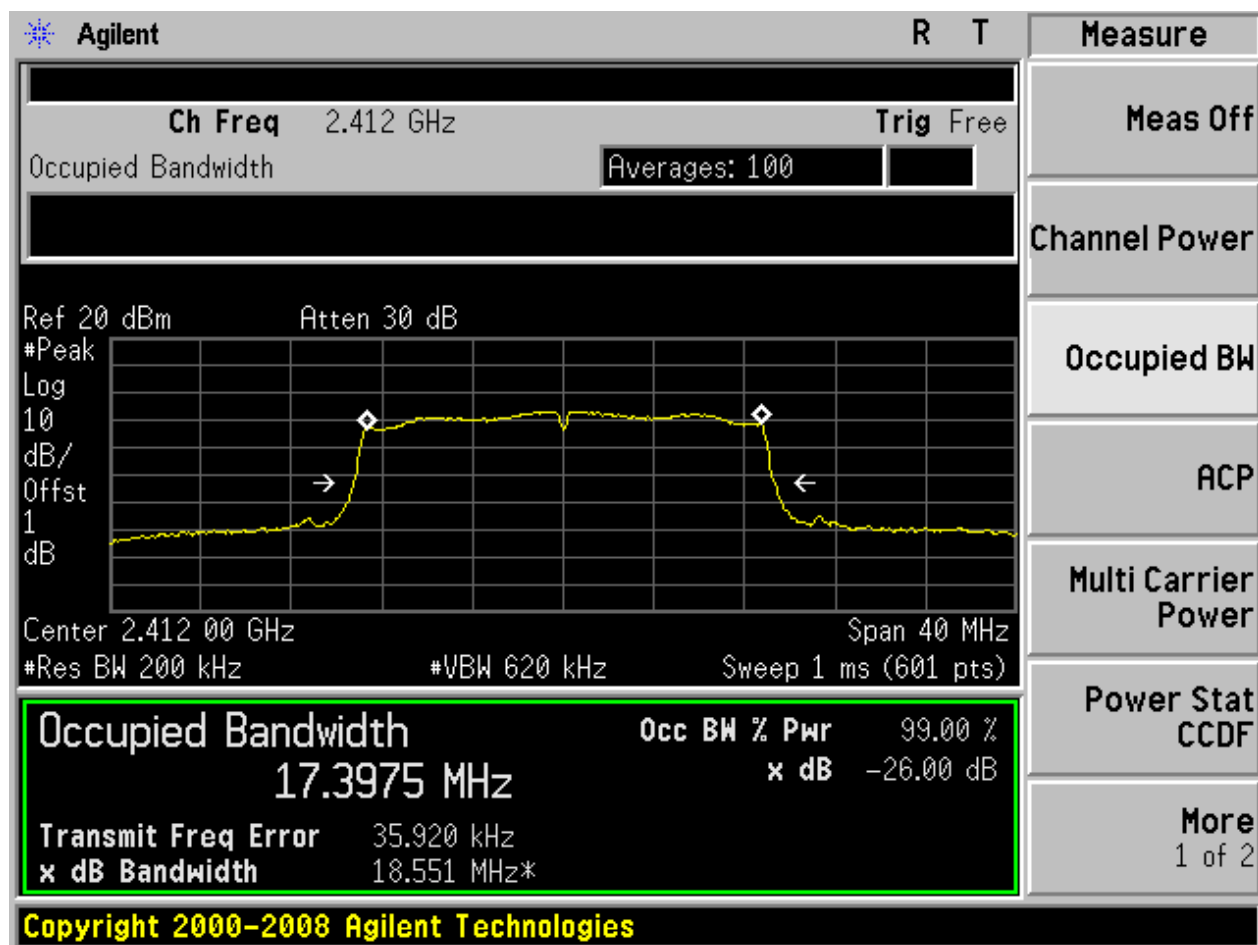


2.14 11N20_L@Ant 2

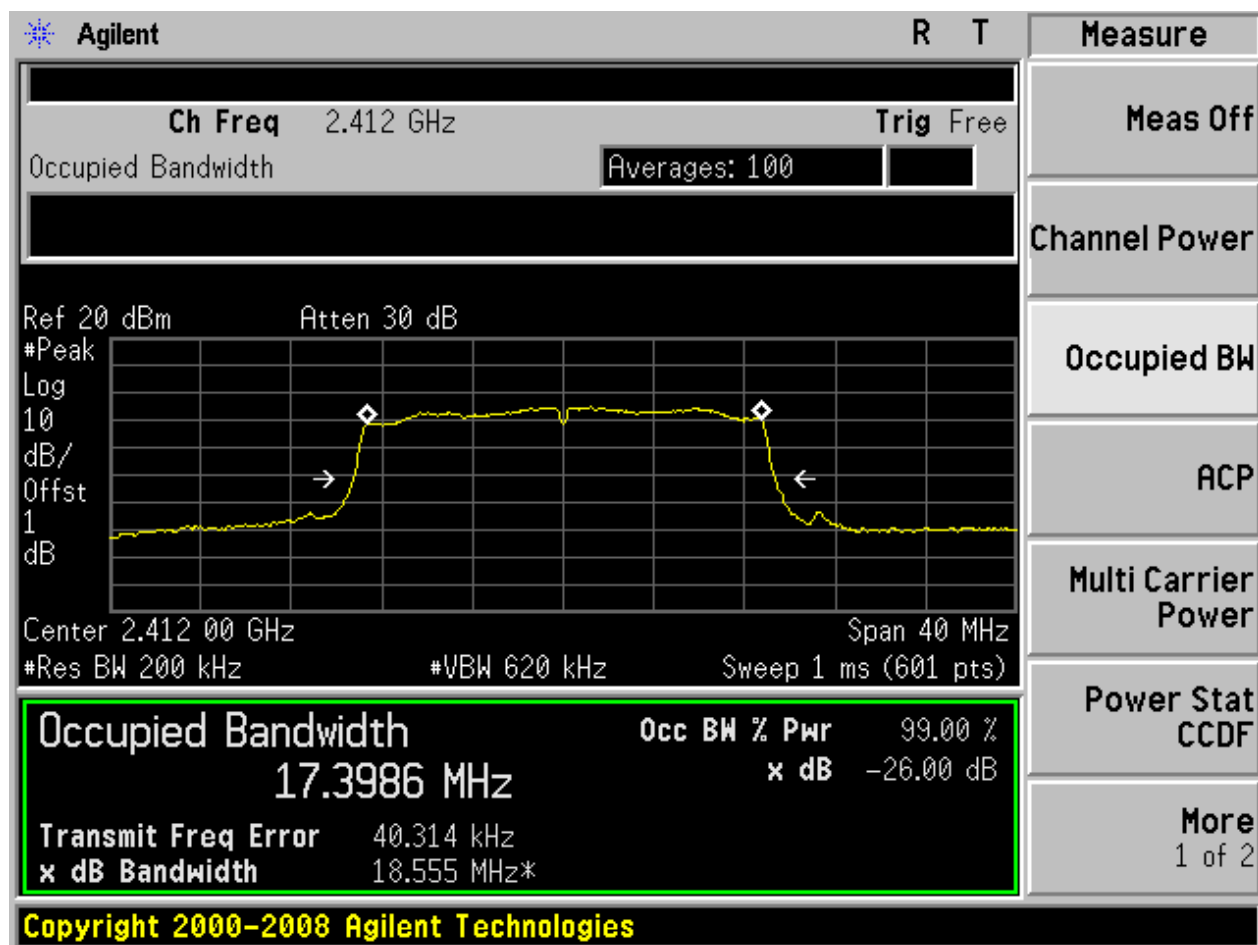


2.15 11N20_M@Ant 1

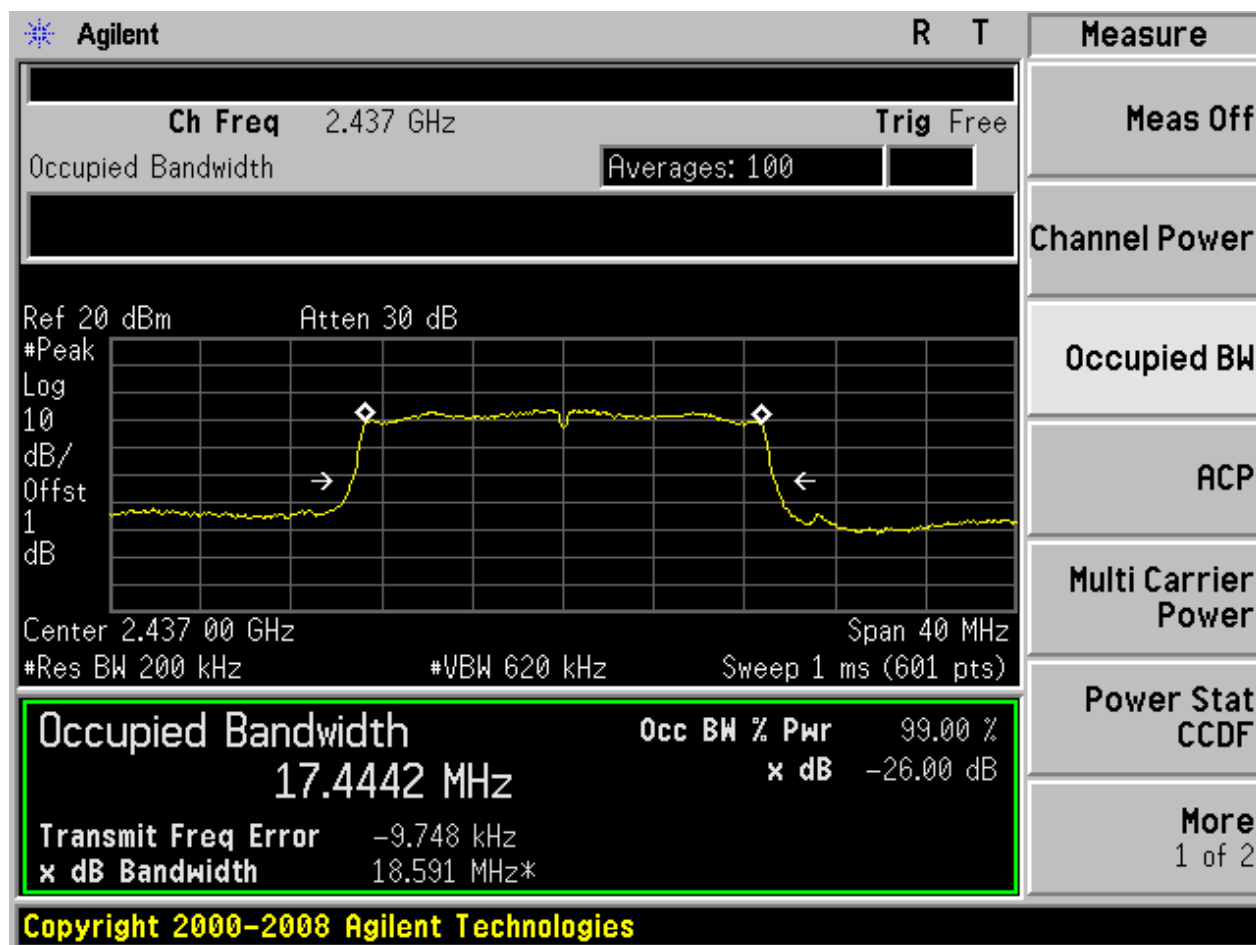


2.16 11N20_M@Ant 2

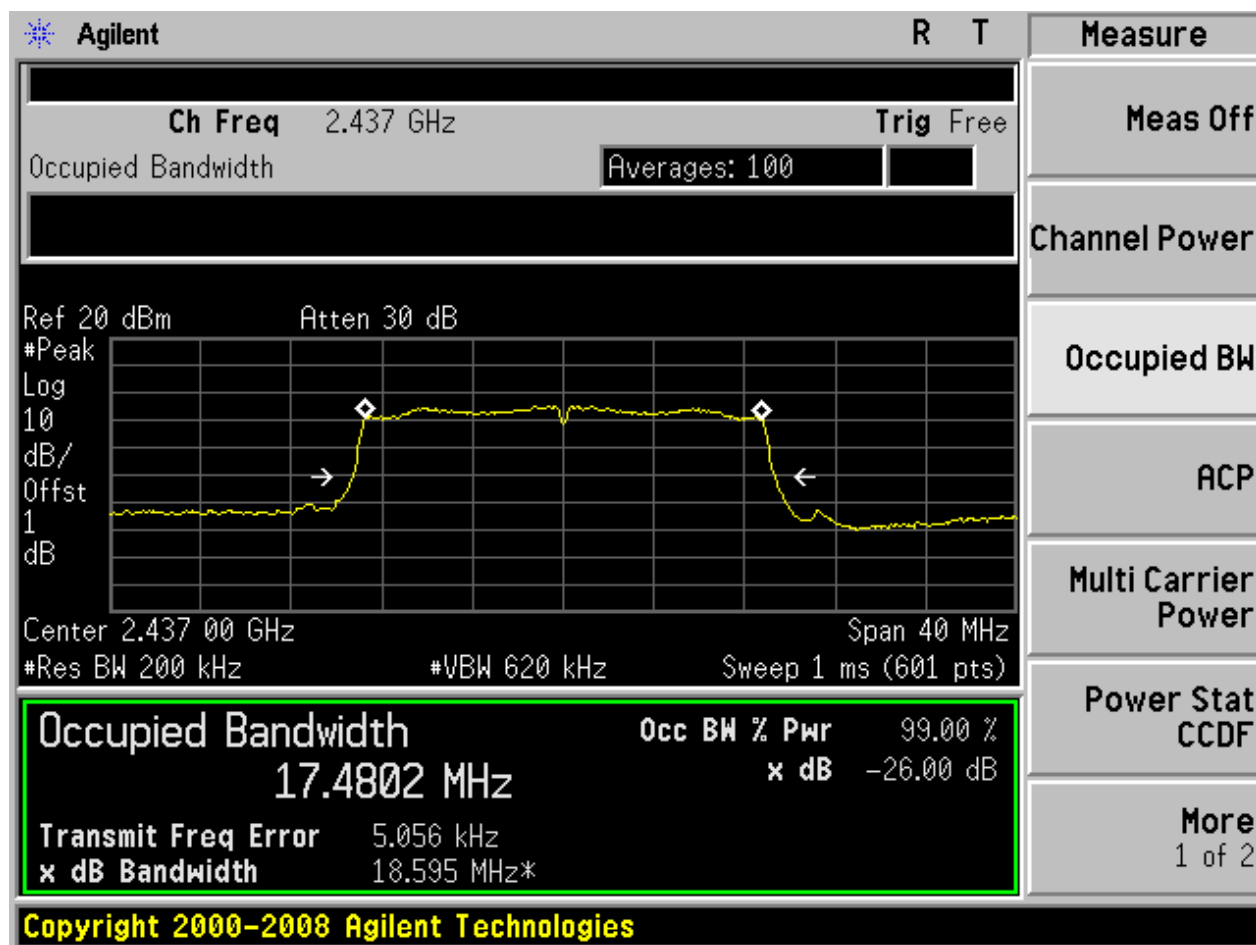


2.17 11N20_H@Ant 1

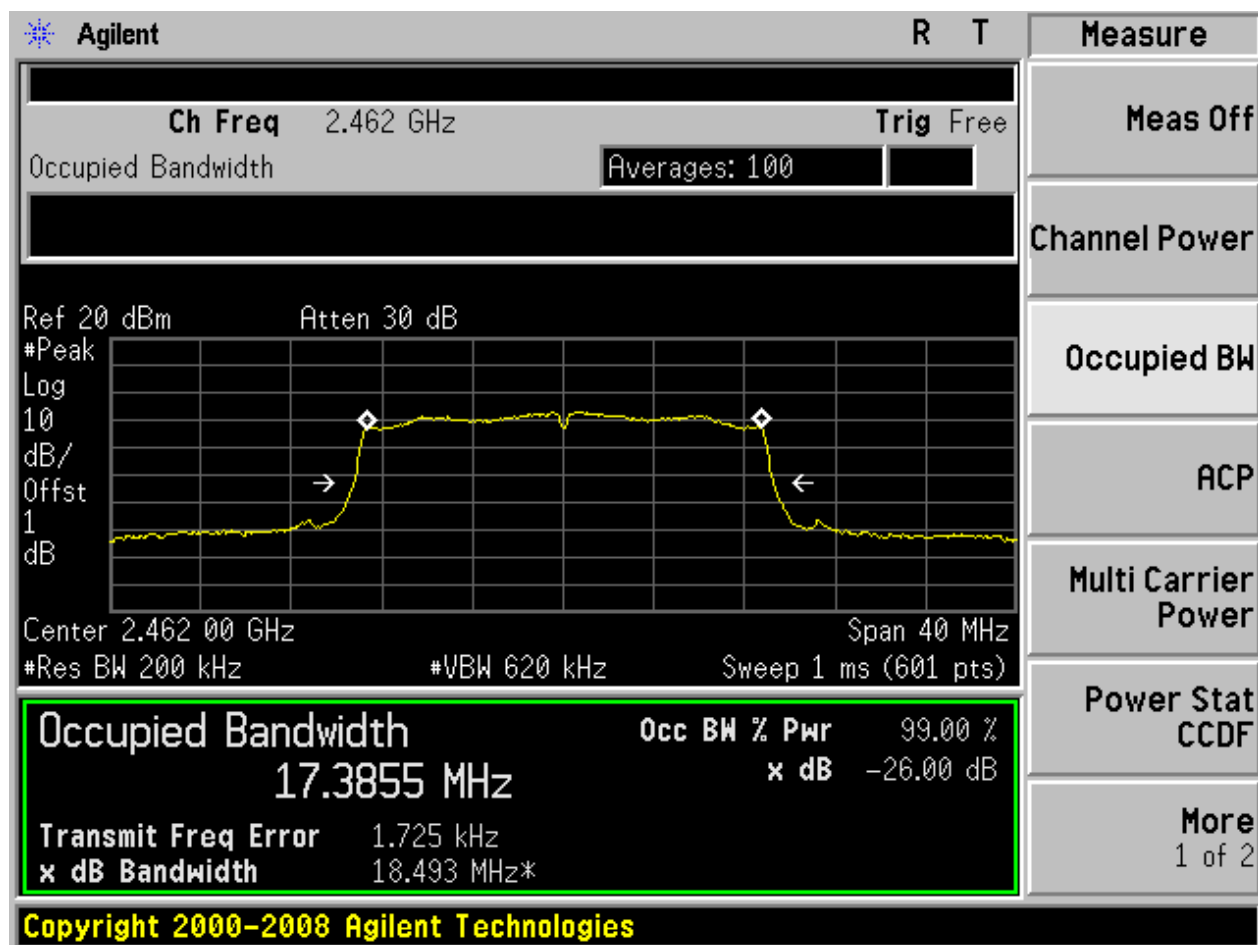


2.18 11N20_H@Ant 2

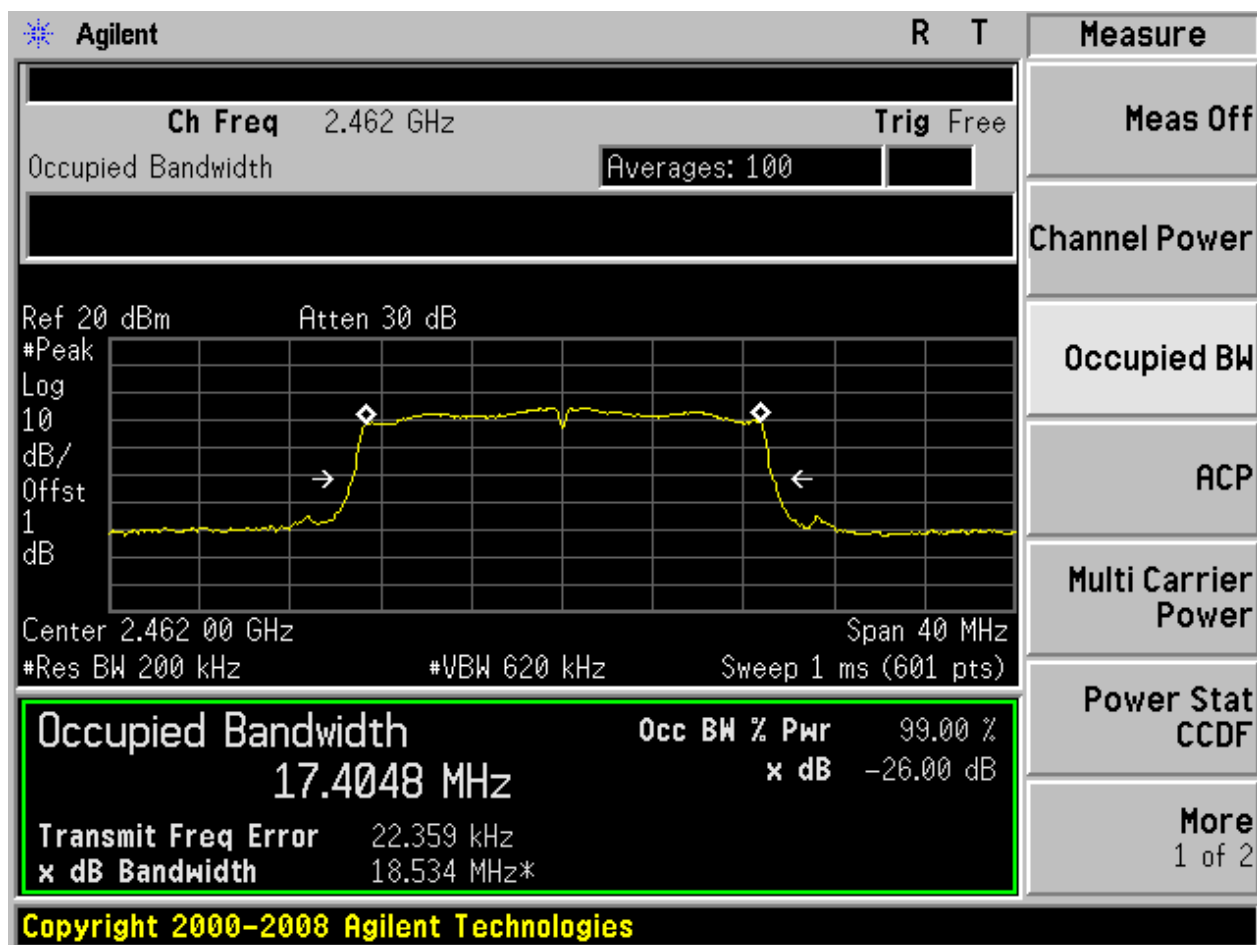


2.13 11N20m_L@Ant 1

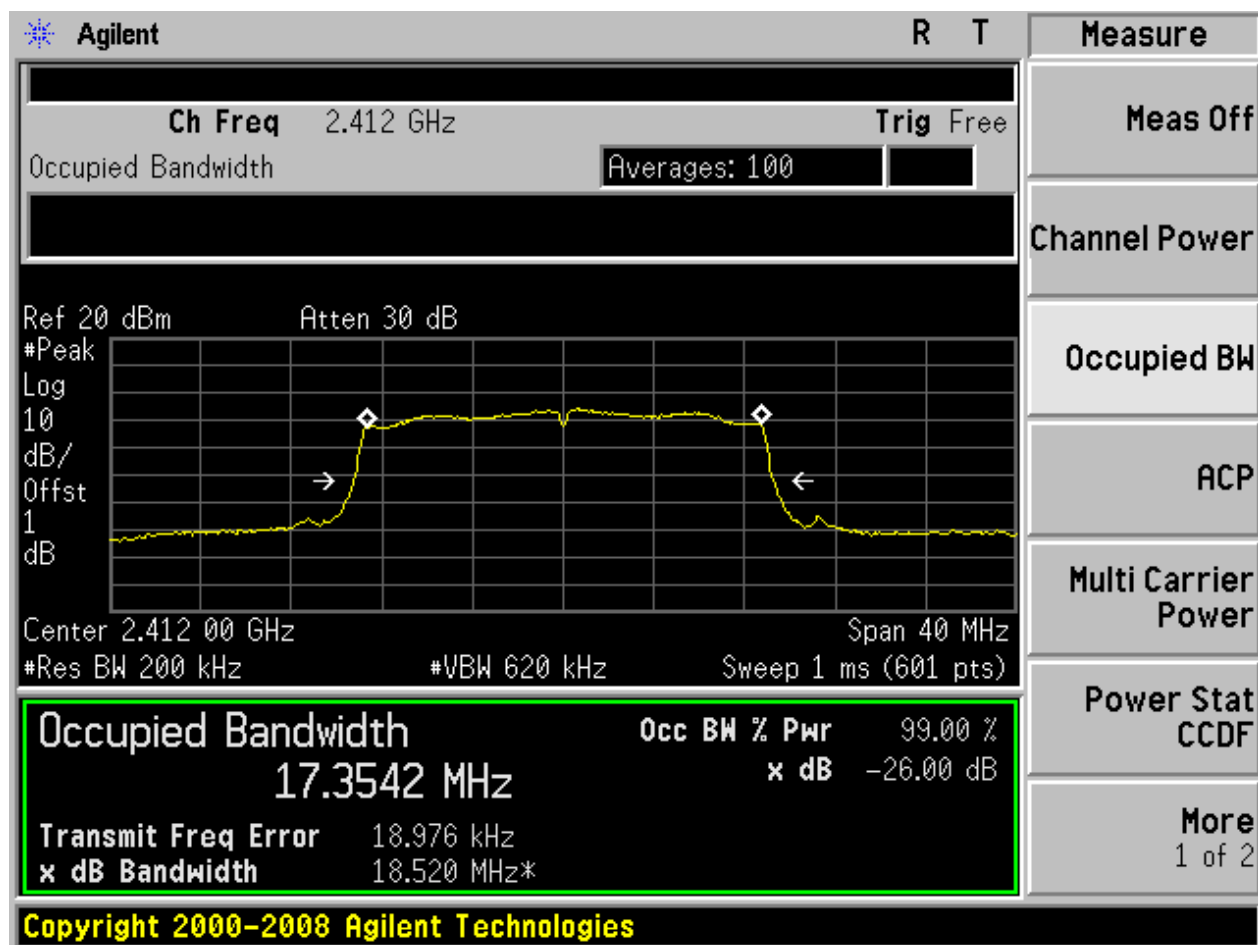


2.14 11N20m_L@Ant 2

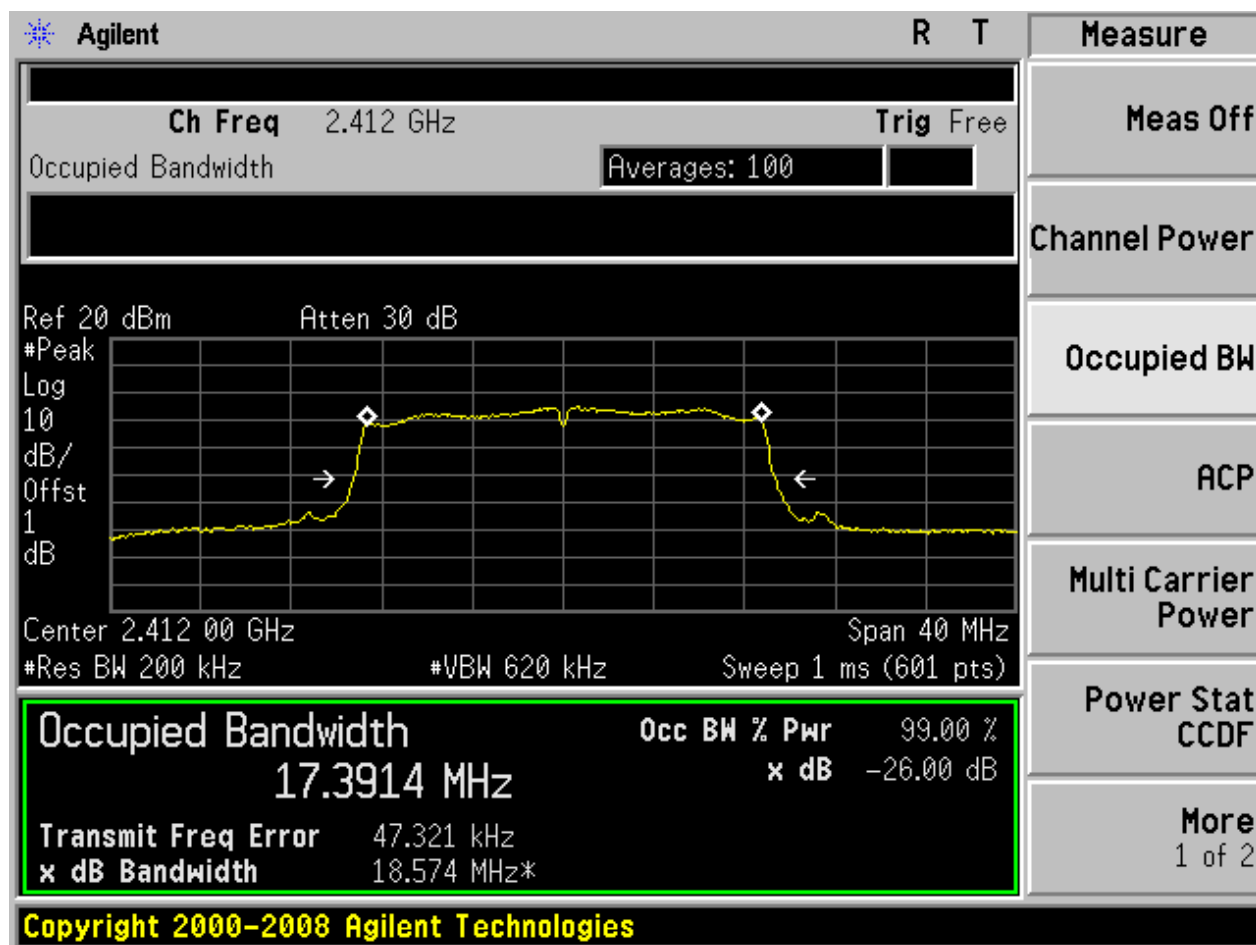


2.15 11N20m_M@Ant 1

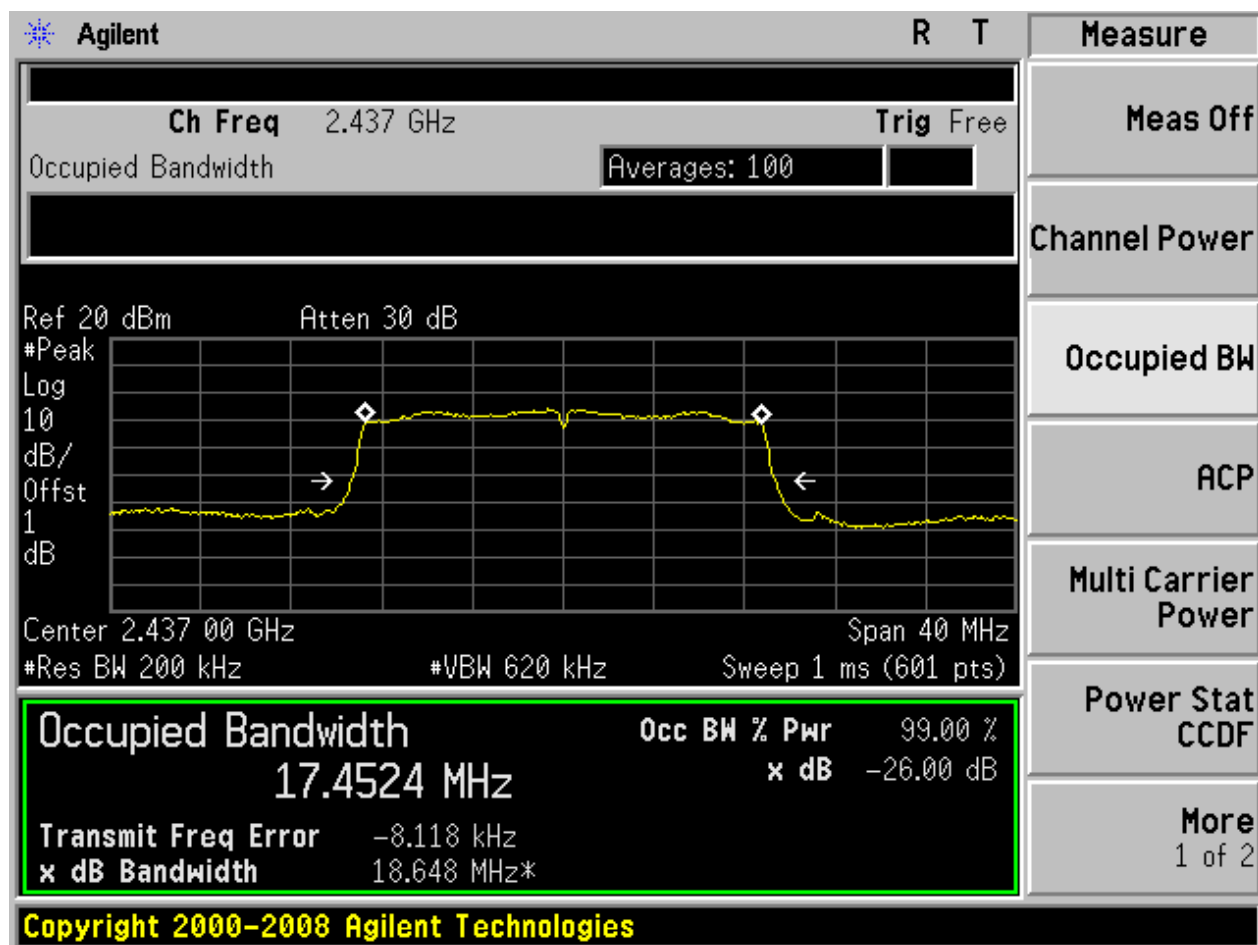

2.16 11N20m_M@Ant 2

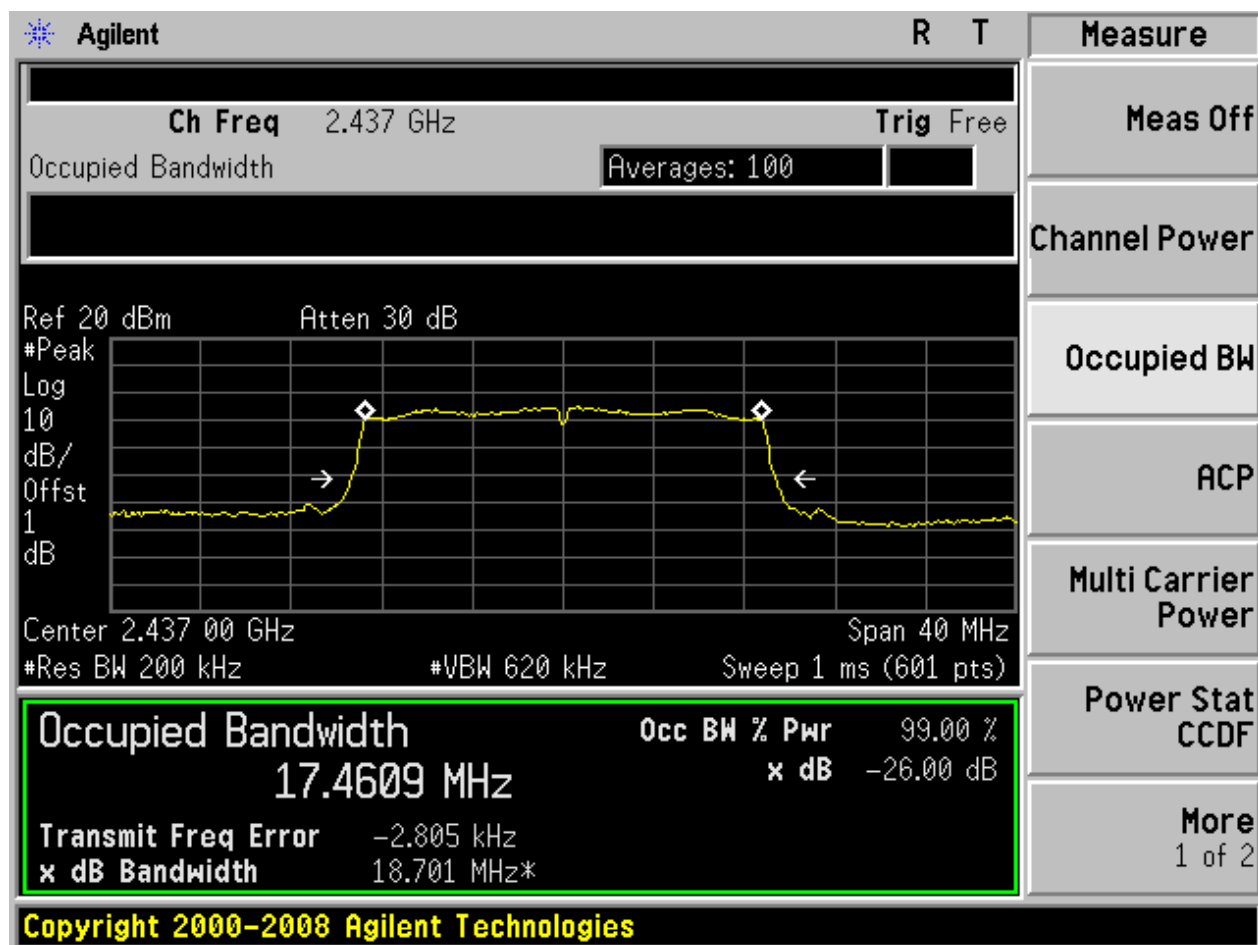



Agilent R T Measure

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth Averages: 100

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/ Offst 1 dB

Center 2.462 00 GHz Span 40 MHz

#Res BW 200 kHz #VBW 620 kHz Sweep 1 ms (601 pts)

Occupied Bandwidth 17.4107 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error -17.115 kHz

x dB Bandwidth 18.567 MHz*

Meas Off

Channel Power

Occupied BW

ACP


Multi Carrier Power

Power Stat CCDF


More 1 of 2

Copyright 2000-2008 Agilent Technologies


2.18 11N20m_H@Ant 2

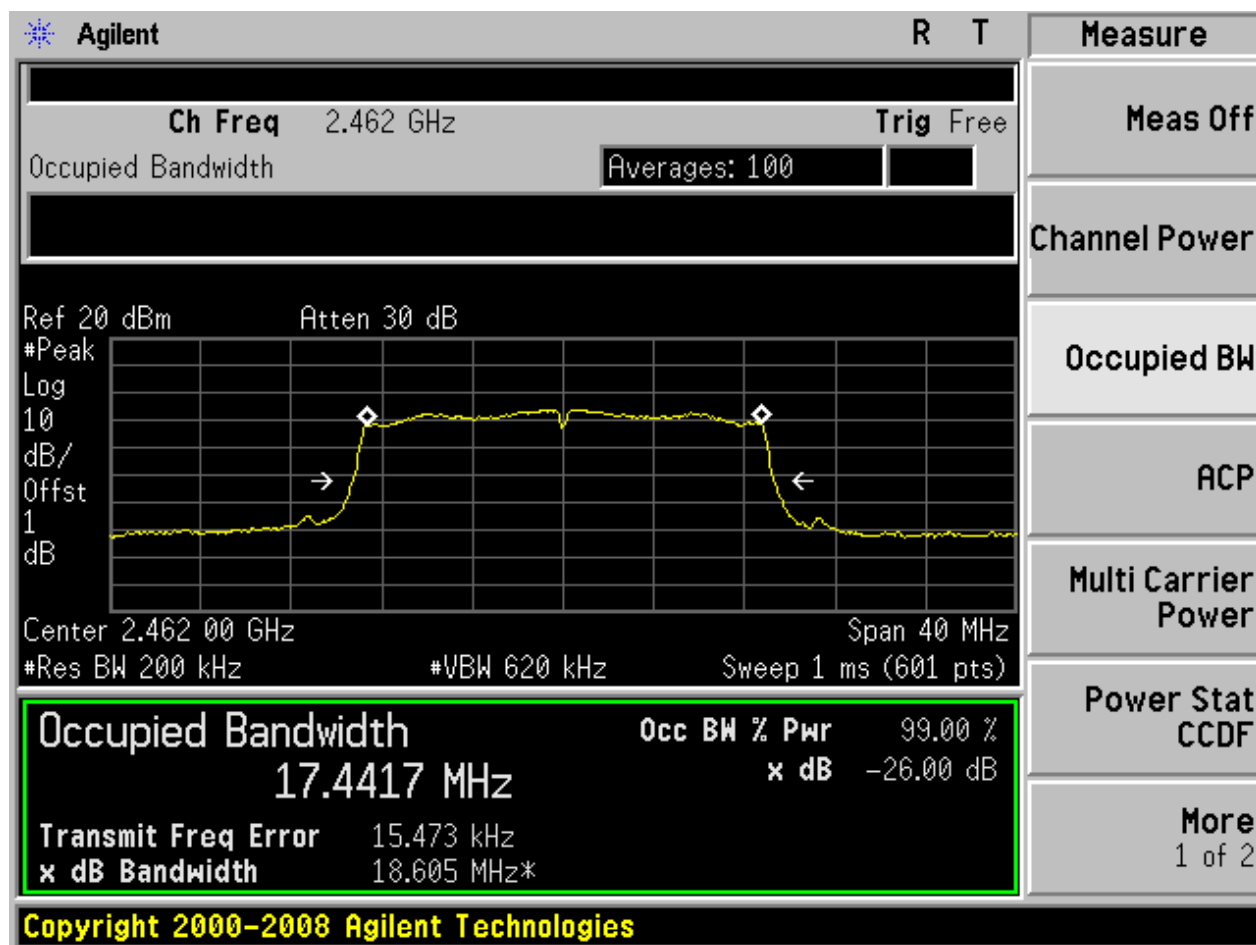


2.19 11N40_L@Ant 1

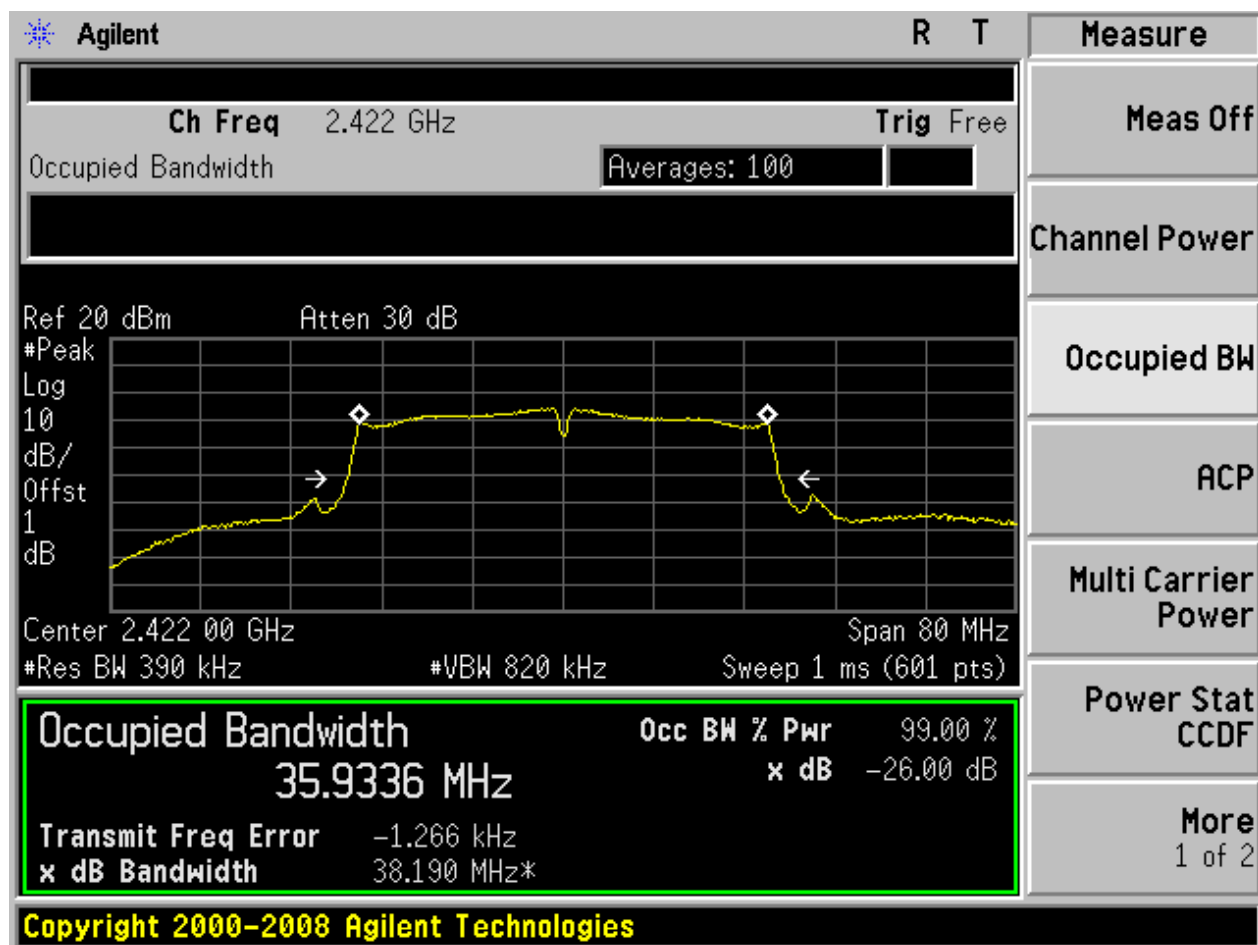


2.20 11N40_L@Ant 2

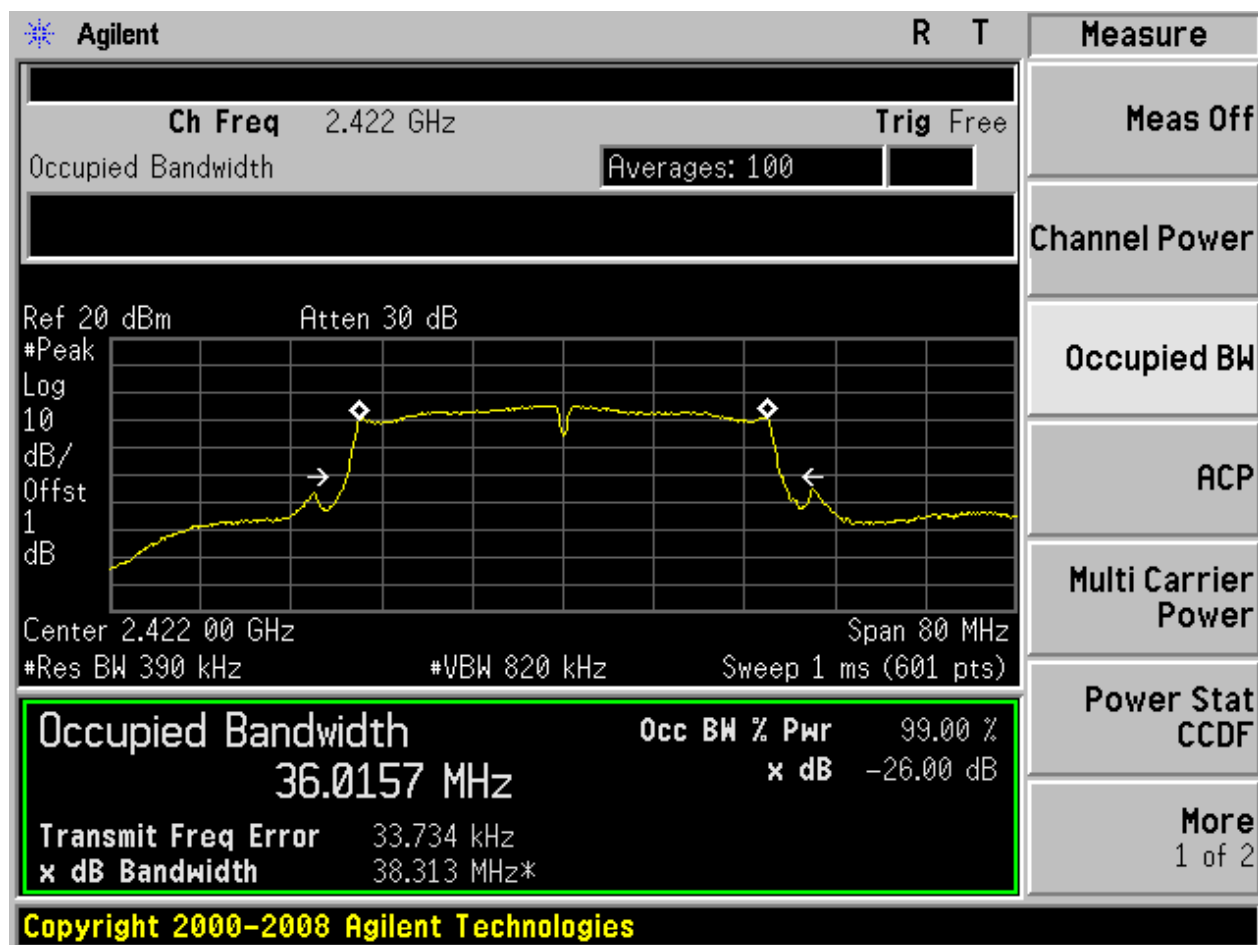


2.21 11N40_M@Ant 1

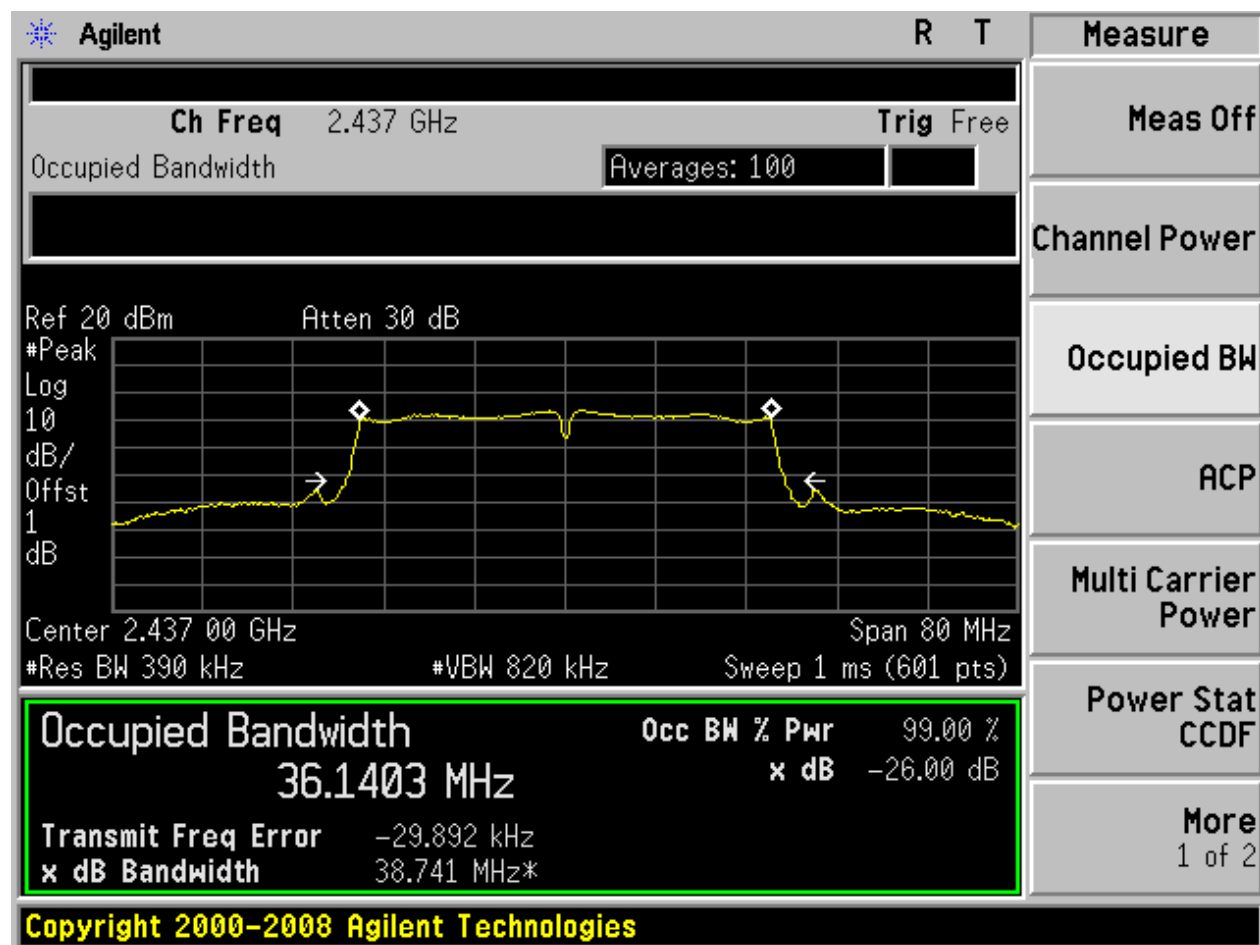


2.22 11N40_M@Ant 2

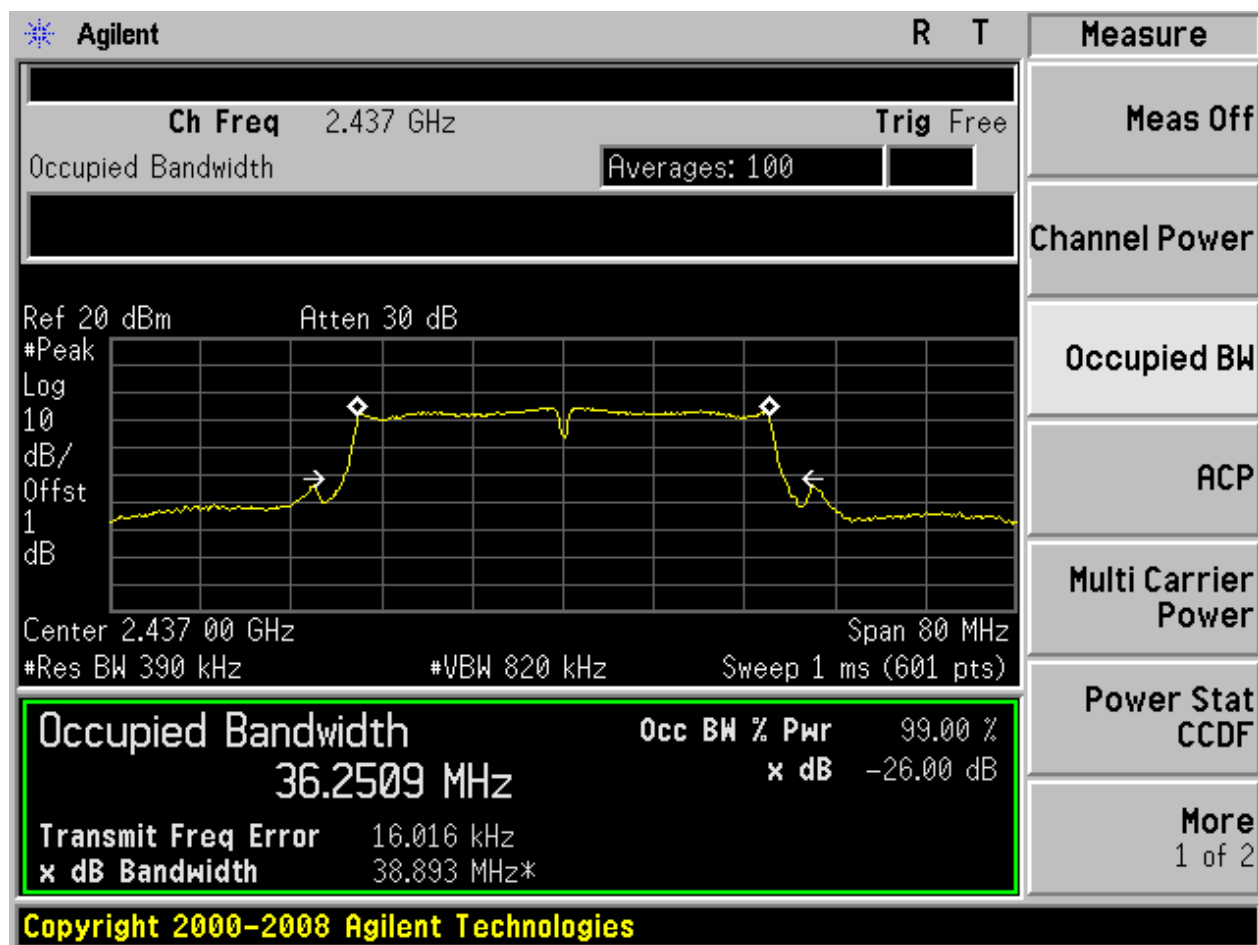


2.23 11N40_H@Ant 1

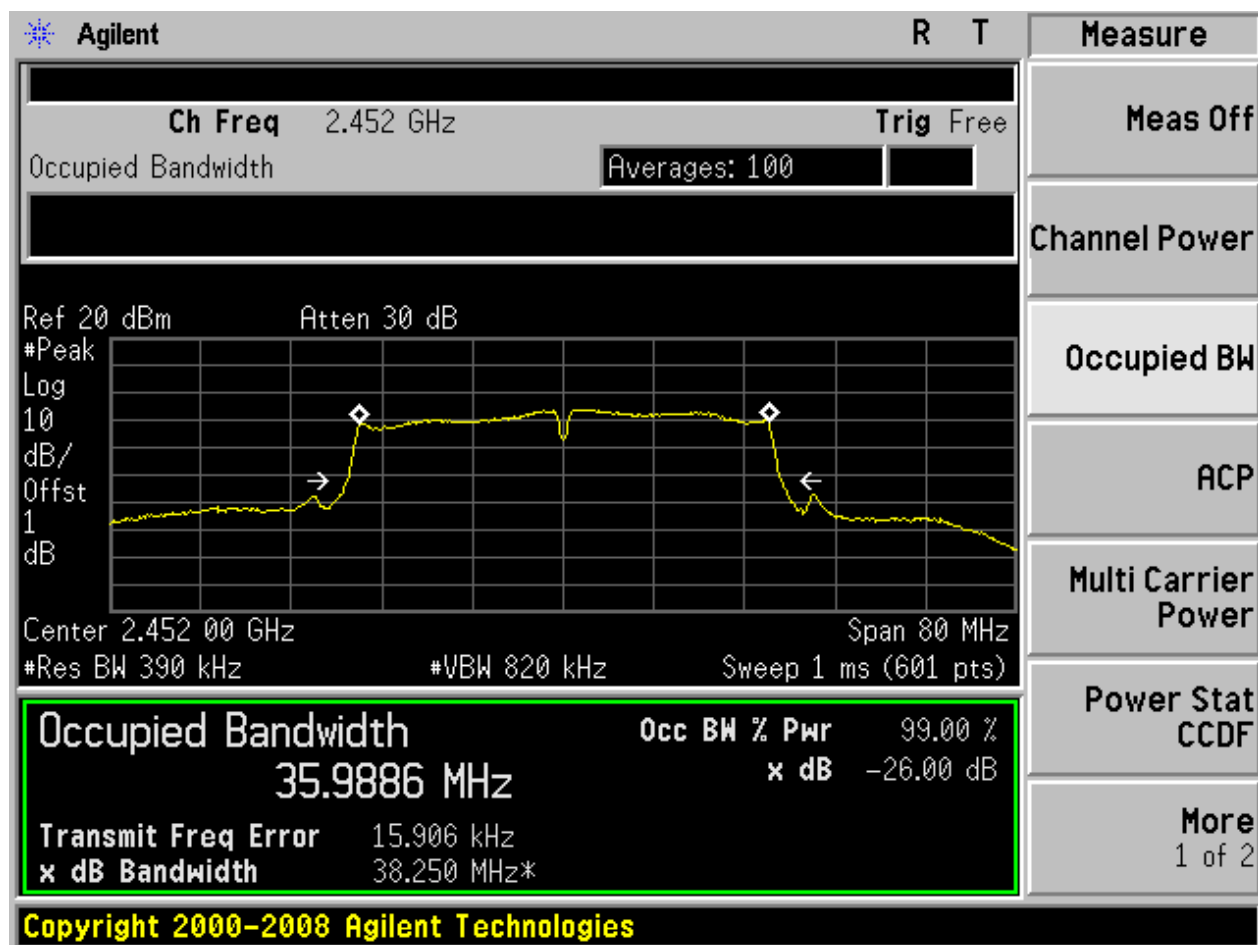


2.24 11N40_H@Ant 2

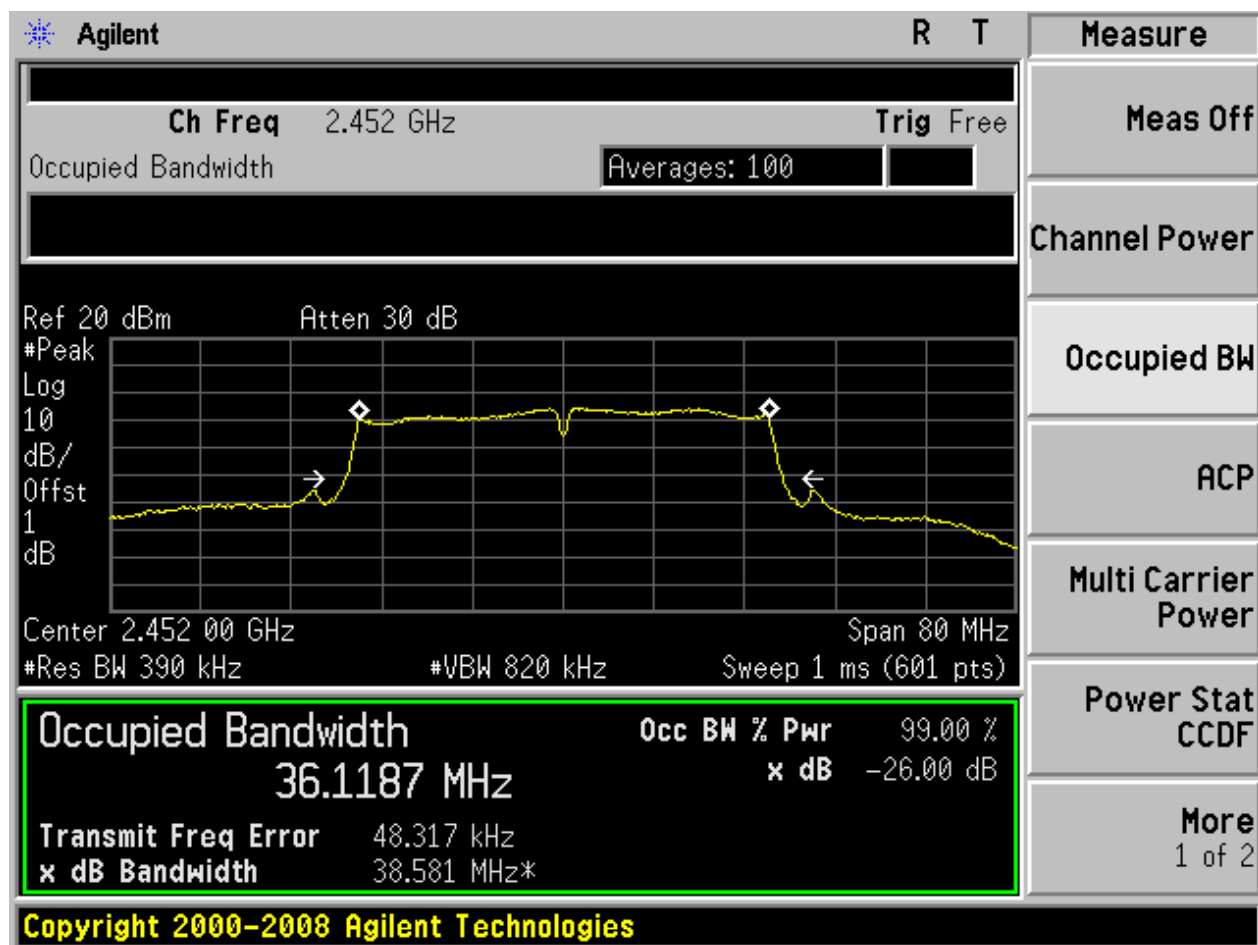


2.31 11N40m_L@Ant 1

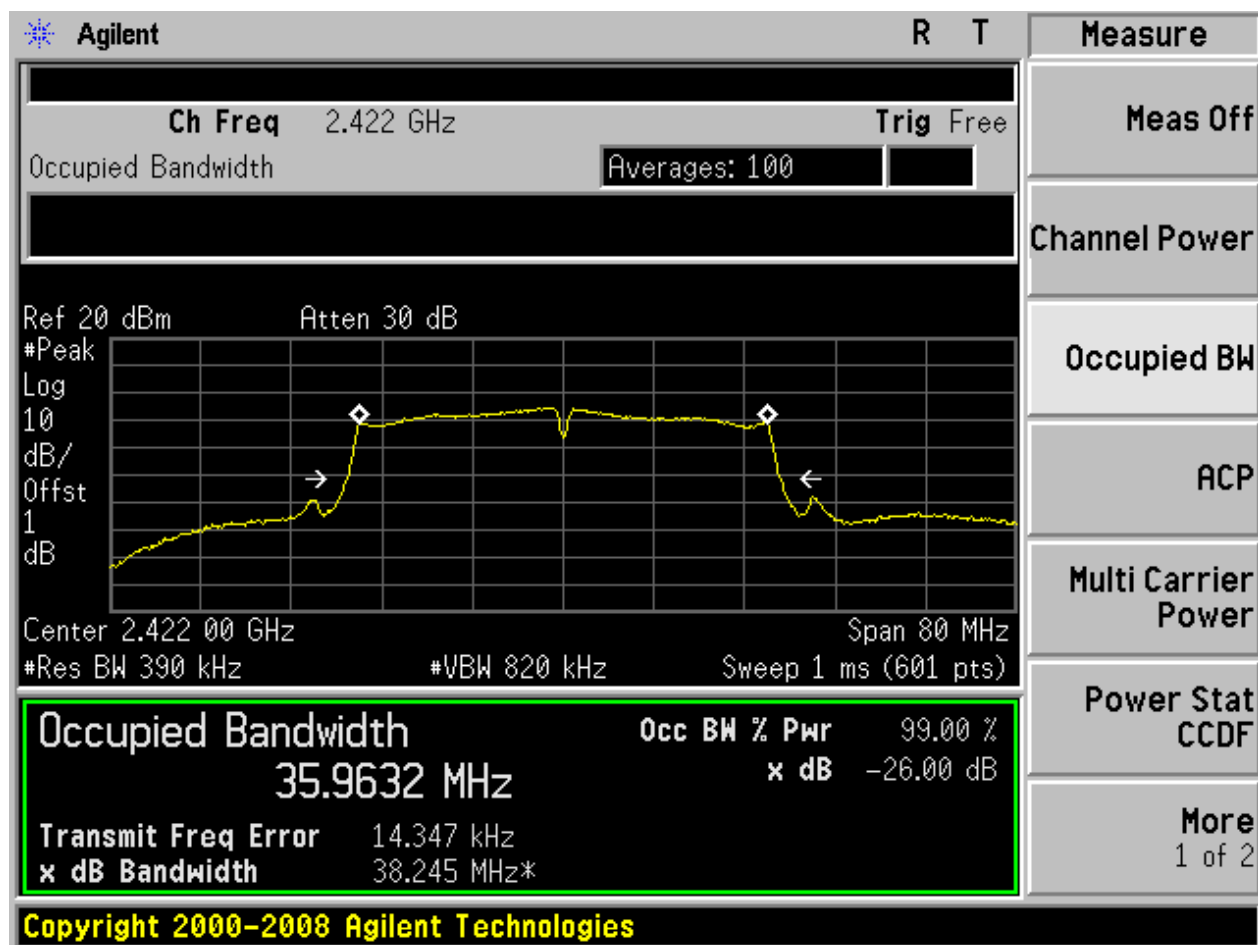


2.32 11N40m_L@Ant 2

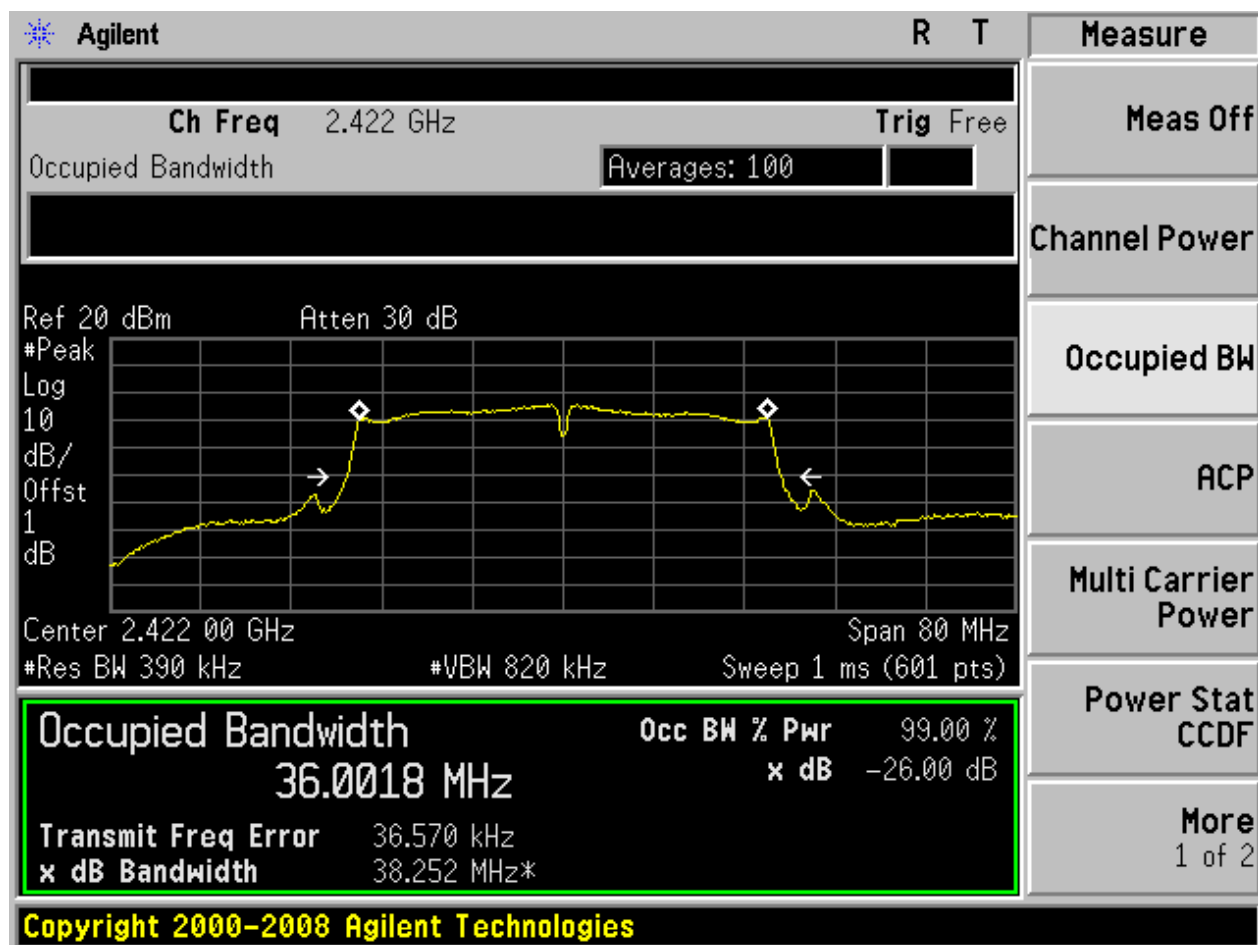


2.33 11N40m_M@Ant 1

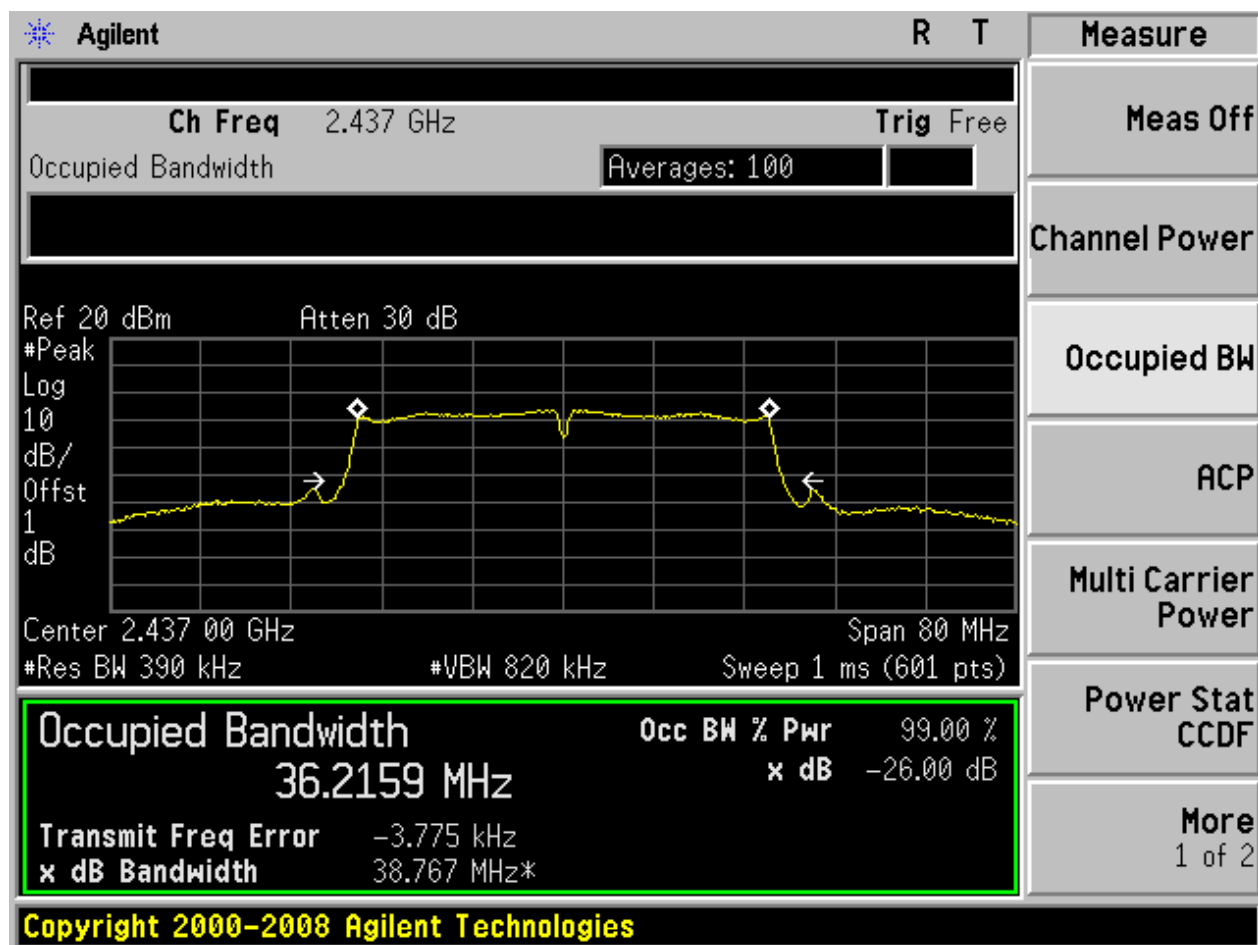


2.34 11N40m_M@Ant 2

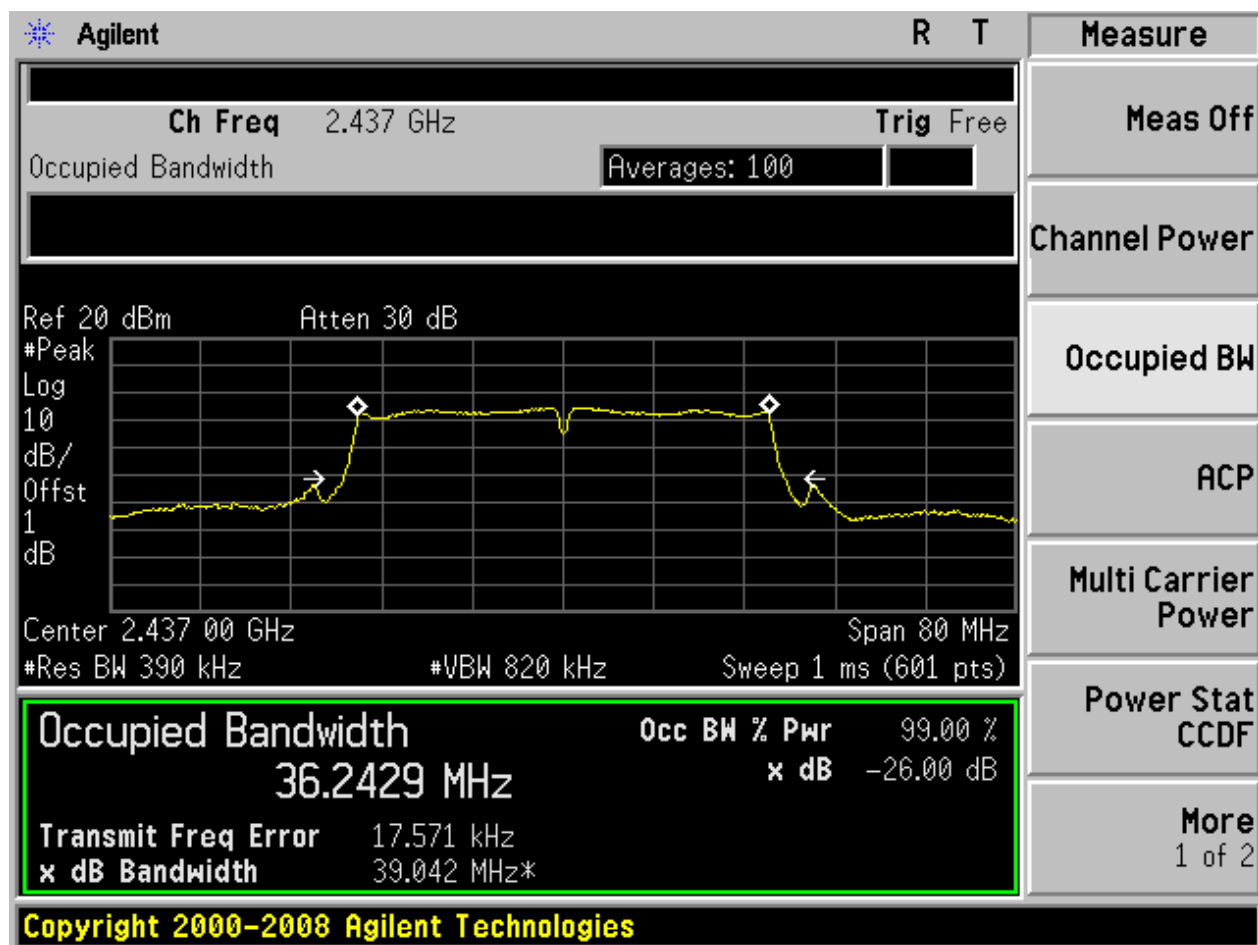

2.35 11N40m_H@Ant 1

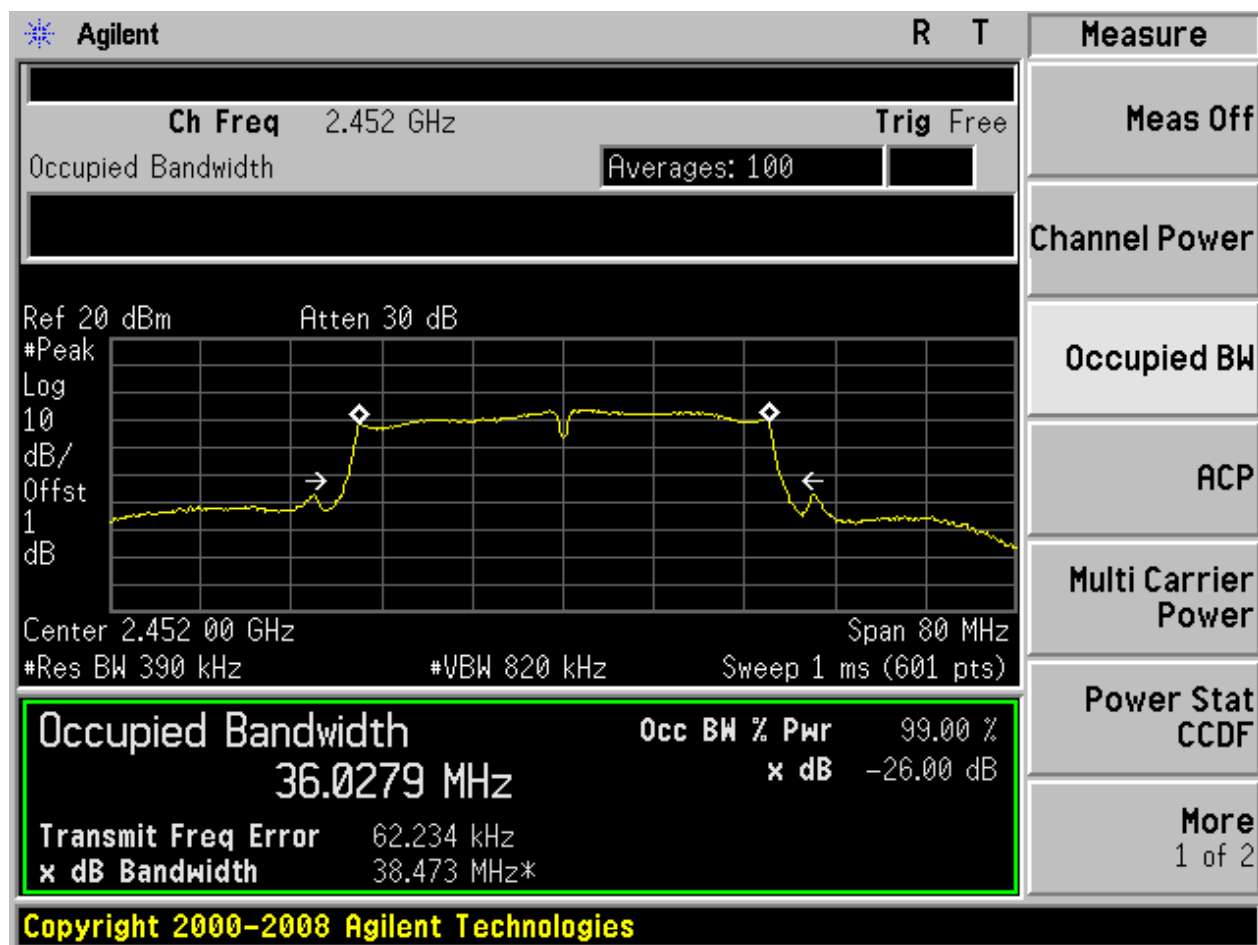

2.36 11N40m_H@Ant 2

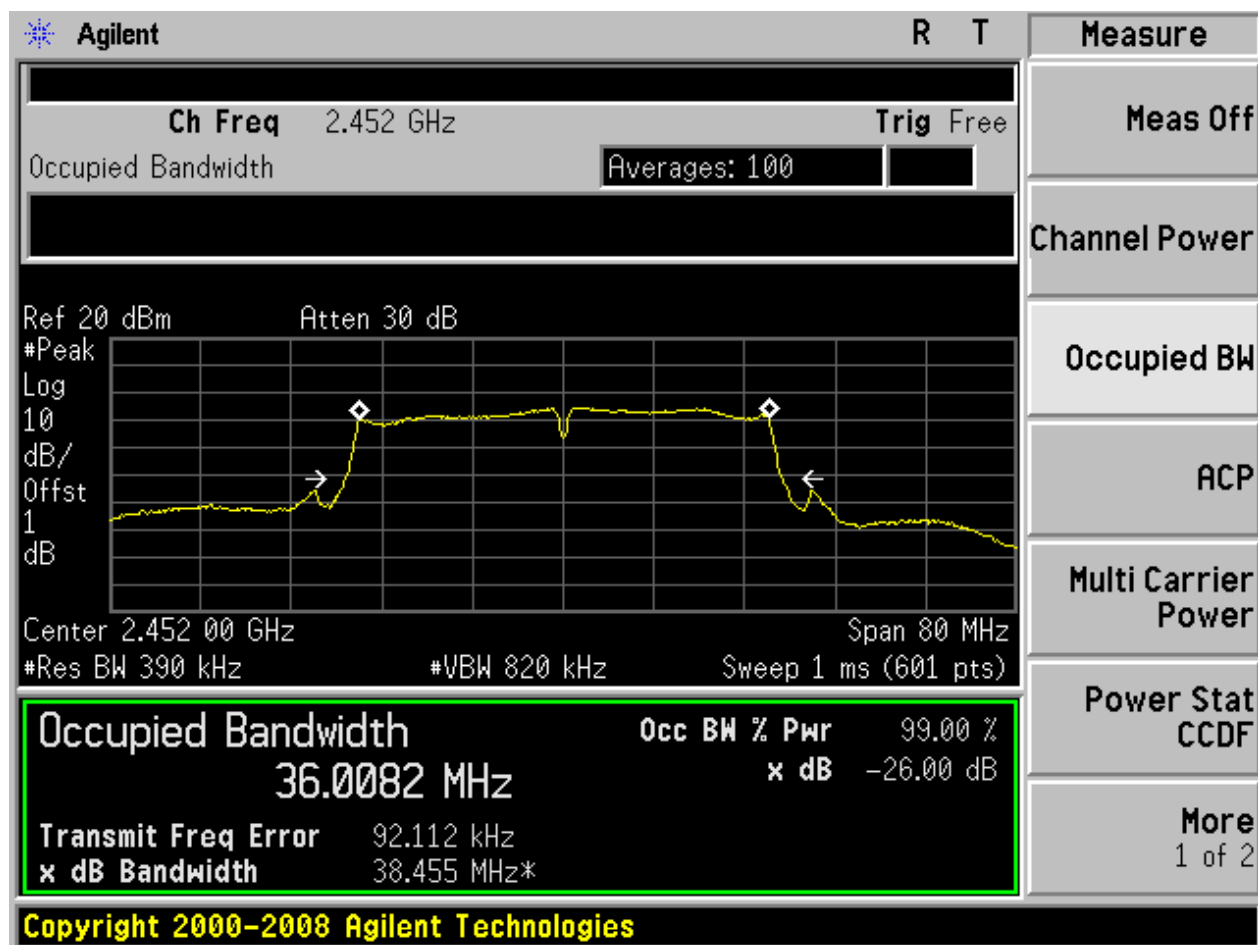


Appendix C: Maximum Conducted Average Output Power

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	Power[dBm]	Verdict
11B	L	2412	Ant 1	15.99	pass
11B	L	2412	Ant 2	16.73	pass
11B	M	2437	Ant 1	16.56	pass
11B	M	2437	Ant 2	17.48	pass
11B	H	2462	Ant 1	15.71	pass
11B	H	2462	Ant 2	16.38	pass
11G	L	2412	Ant 1	11.49	pass
11G	L	2412	Ant 2	12.50	pass
11G	M	2437	Ant 1	12.60	pass
11G	M	2437	Ant 2	13.26	pass
11G	H	2462	Ant 1	11.53	pass
11G	H	2462	Ant 2	12.28	pass
11N20	L	2412	Ant 1	8.63	pass
11N20	L	2412	Ant 2	10.20	pass
11N20	M	2437	Ant 1	9.37	pass
11N20	M	2437	Ant 2	10.68	pass
11N20	H	2462	Ant 1	8.56	pass
11N20	H	2462	Ant 2	9.63	pass
11N20m	L	2412	Ant 1	8.87	pass
11N20m	L	2412	Ant 2	9.74	pass
11N20m	M	2437	Ant 1	9.77	pass
11N20m	M	2437	Ant 2	10.50	pass
11N20m	H	2462	Ant 1	8.59	pass
11N20m	H	2462	Ant 2	9.30	pass
11N40	L	2422	Ant 1	8.54	pass
11N40	L	2422	Ant 2	10.24	pass
11N40	M	2437	Ant 1	8.84	pass
11N40	M	2437	Ant 2	10.06	pass
11N40	H	2452	Ant 1	8.55	pass
11N40	H	2452	Ant 2	9.60	pass
11N40m	L	2422	Ant 1	8.80	pass
11N40m	L	2422	Ant 2	10.02	pass
11N40m	M	2437	Ant 1	9.09	pass
11N40m	M	2437	Ant 2	10.25	pass
11N40m	H	2452	Ant 1	8.60	pass
11N40m	H	2452	Ant 2	9.58	pass


Part II - Test Plots

2.1 11B_L@Ant 1

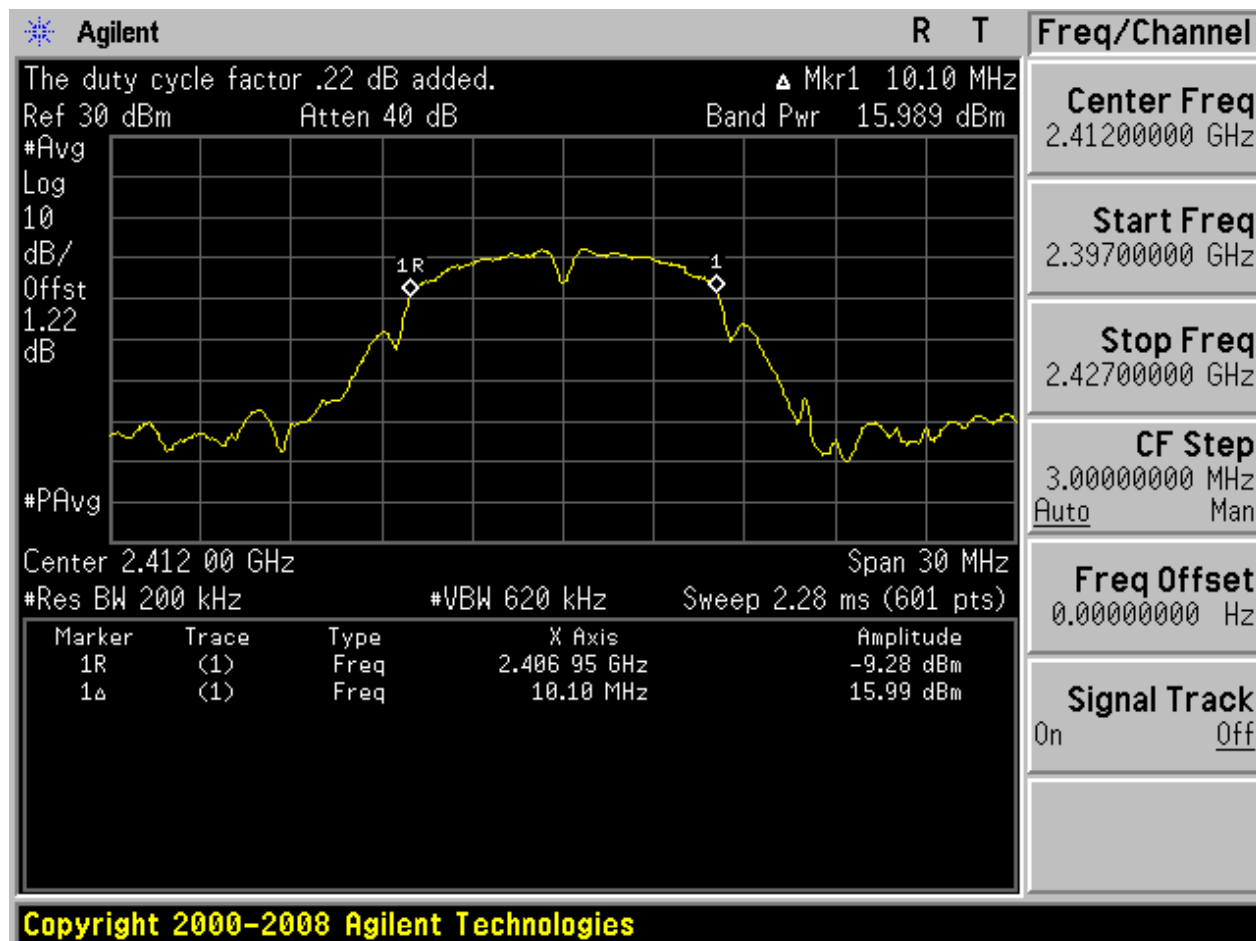




2.2 11B_L@Ant 2

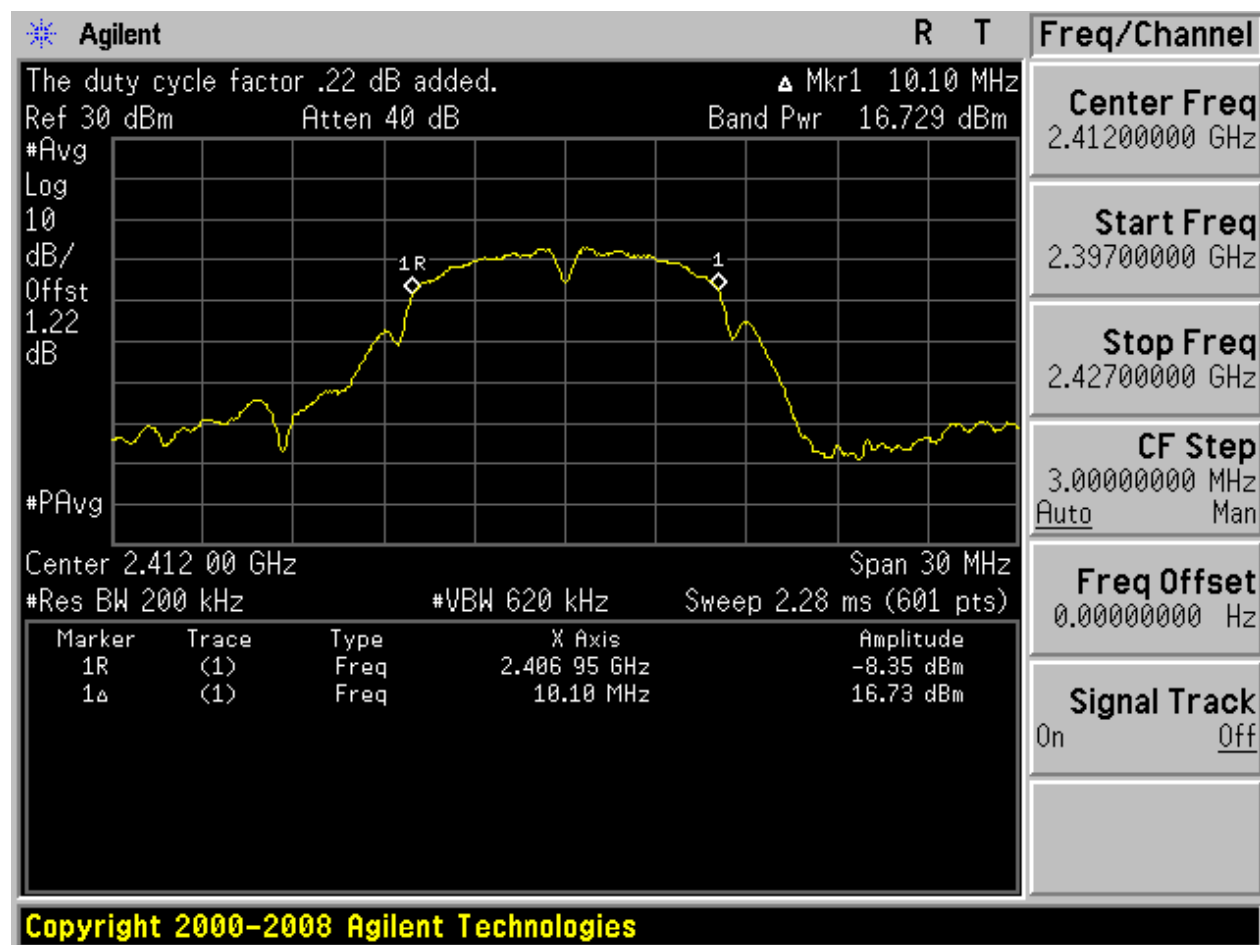




2.3 11B_M@Ant 1

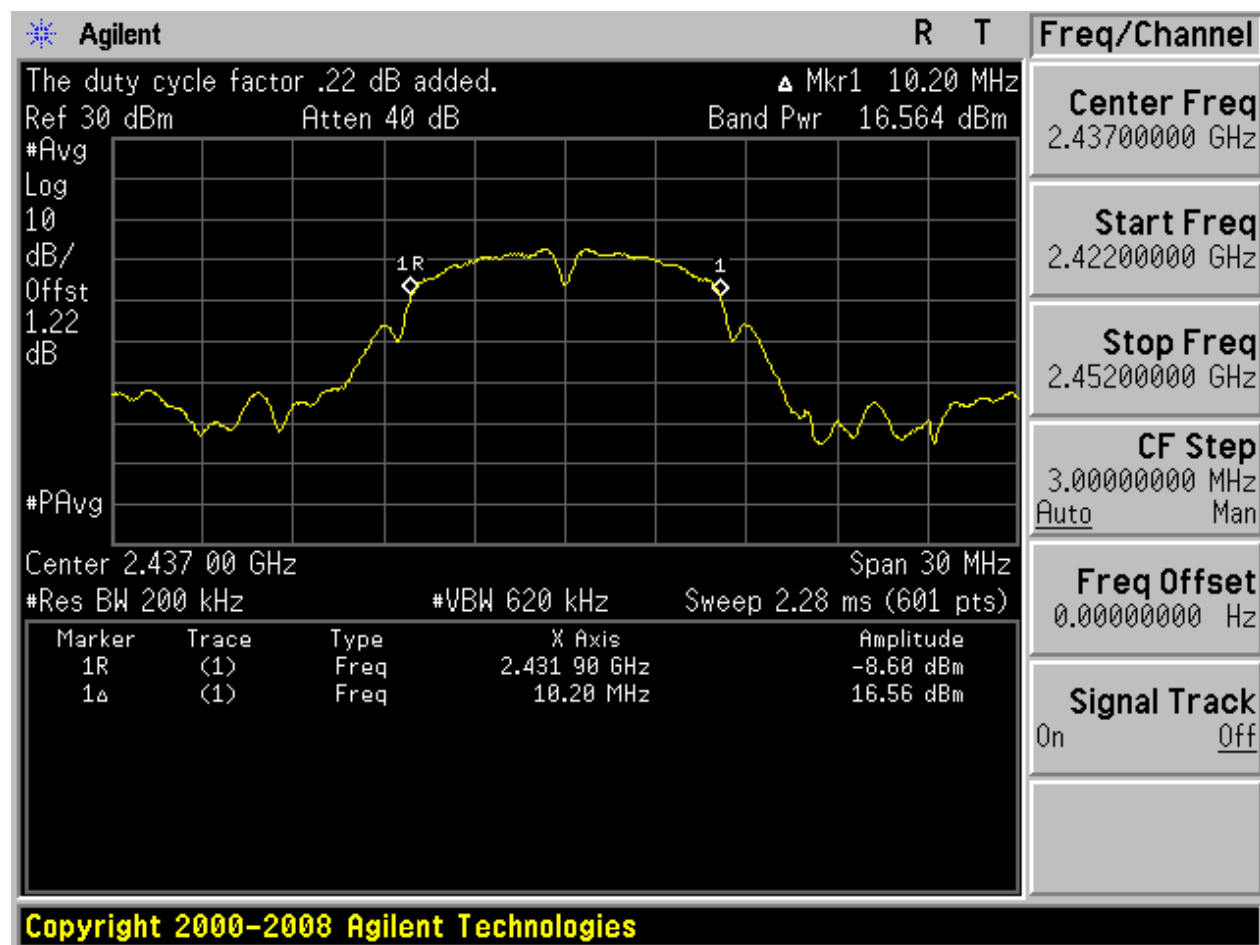




2.4 11B_M@Ant 2

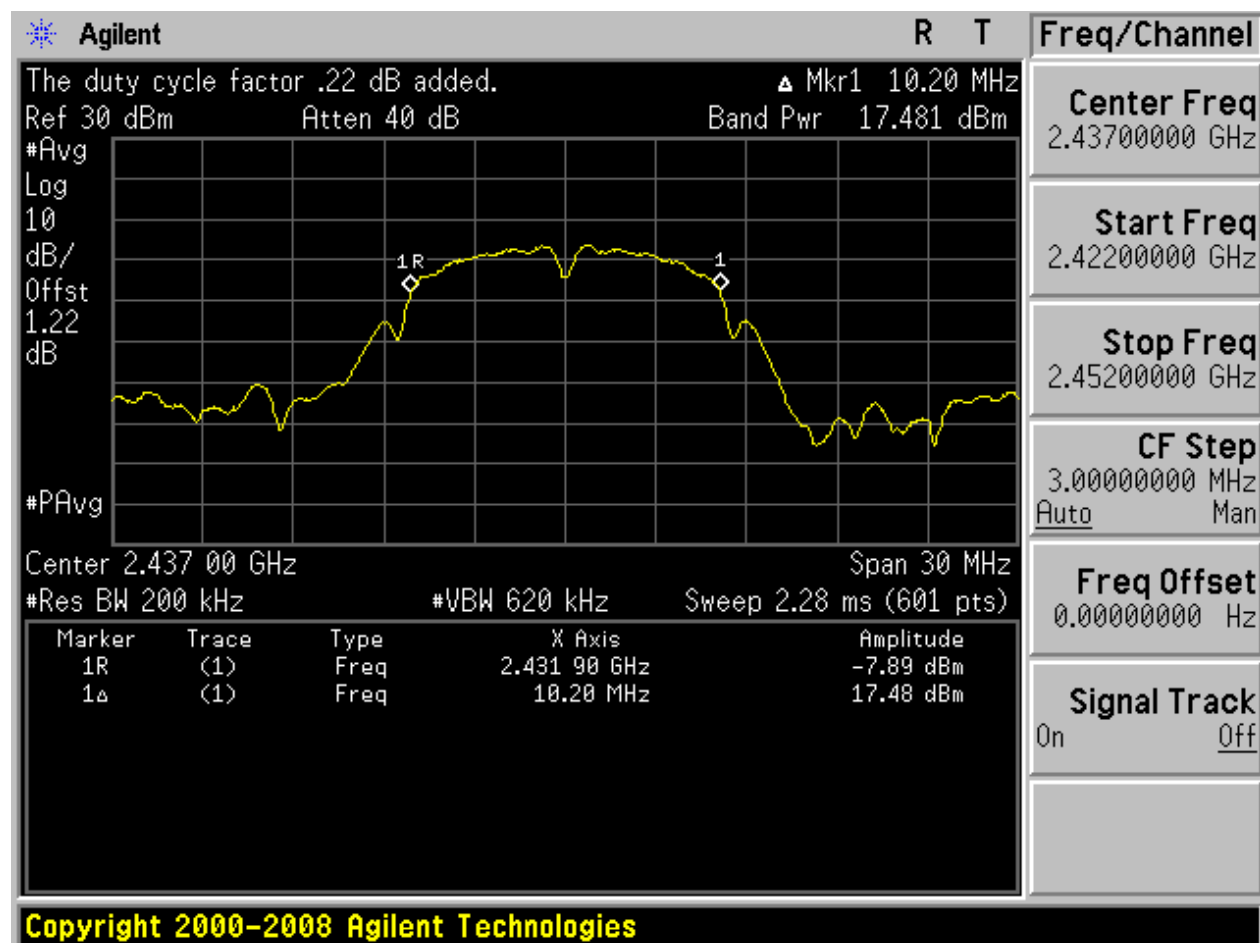




2.5 11B_H@Ant 1

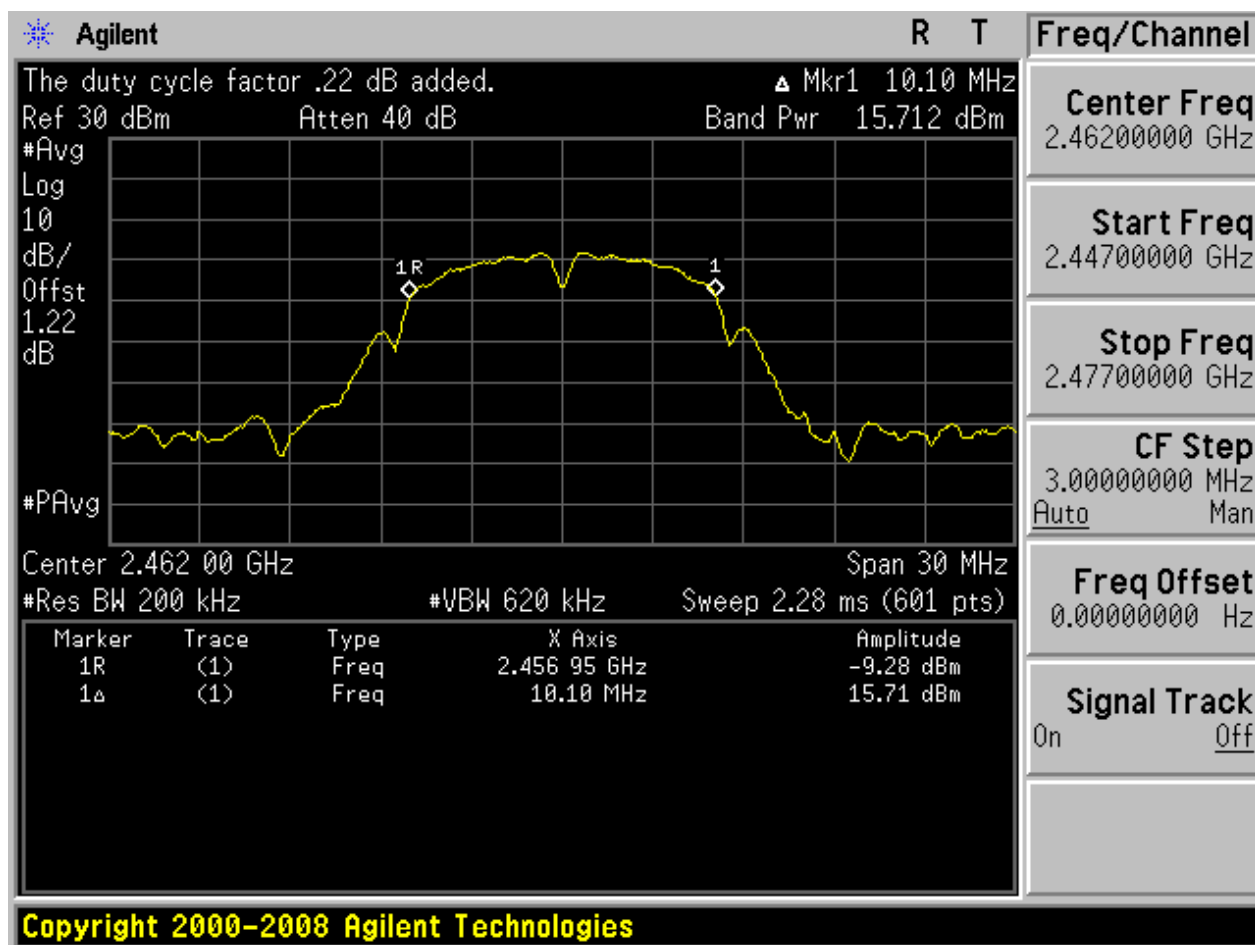




2.6 11B_H@Ant 2

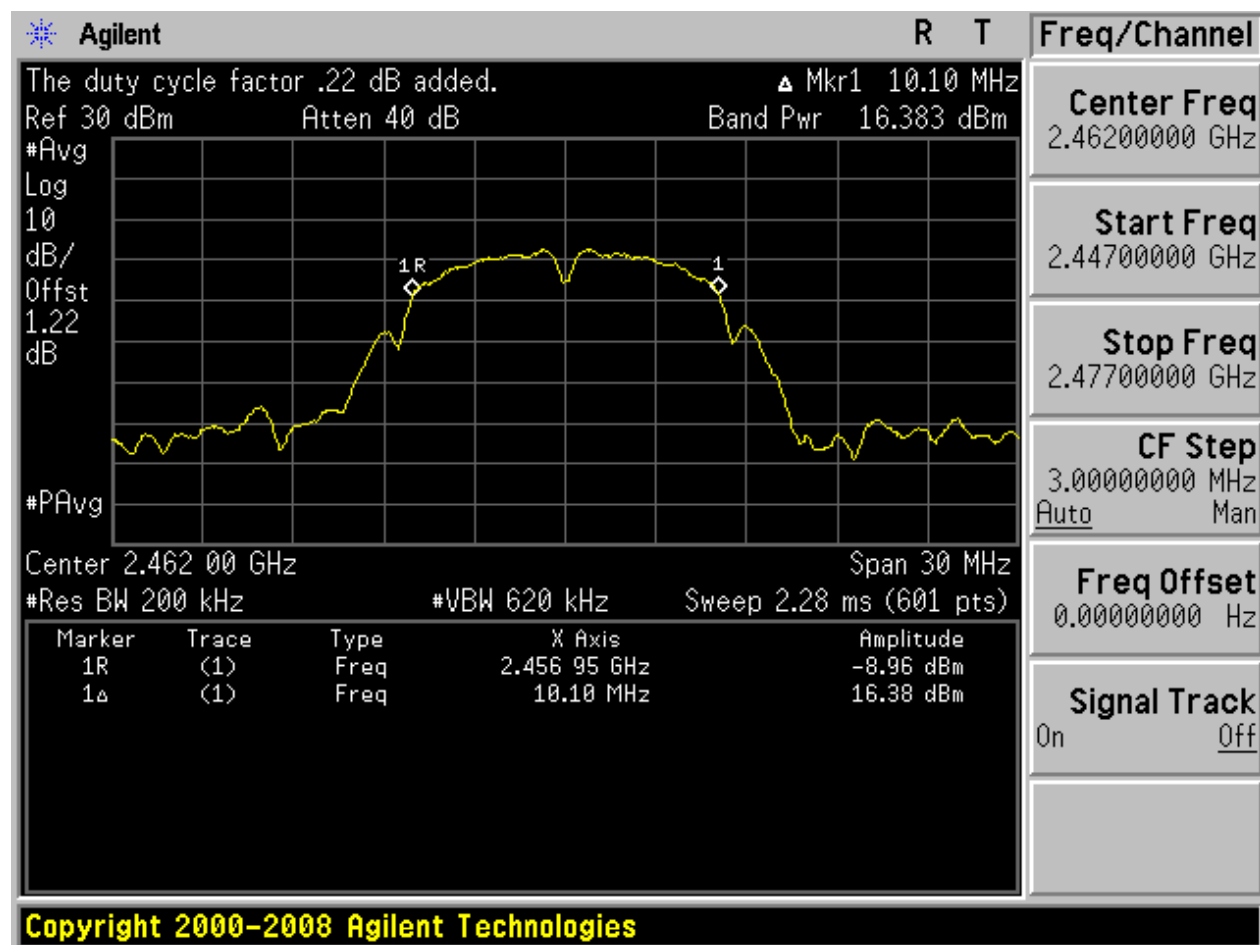




2.7 11G_L@Ant 1

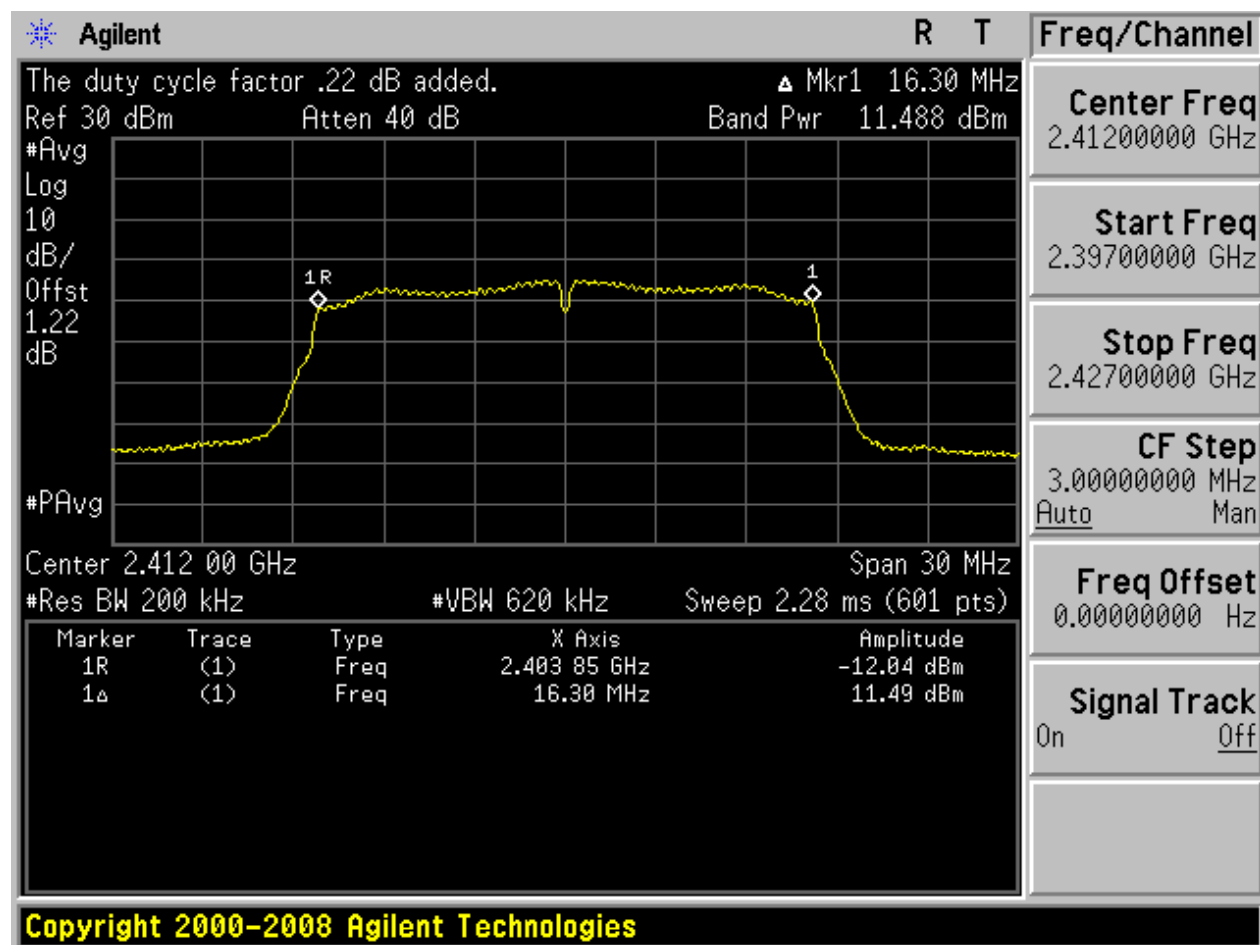




2.8 11G_L@Ant 2

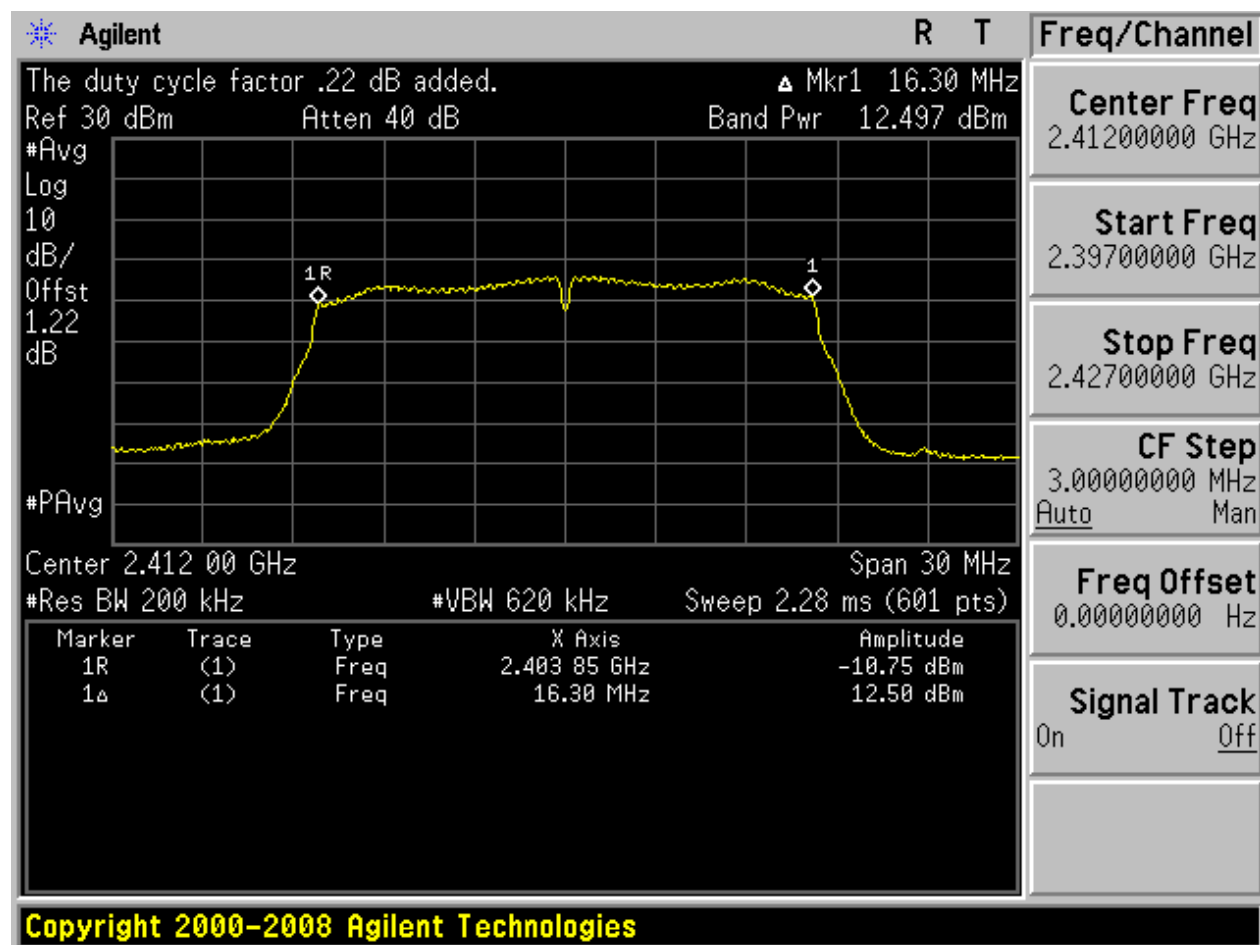




2.9 11G_M@Ant 1

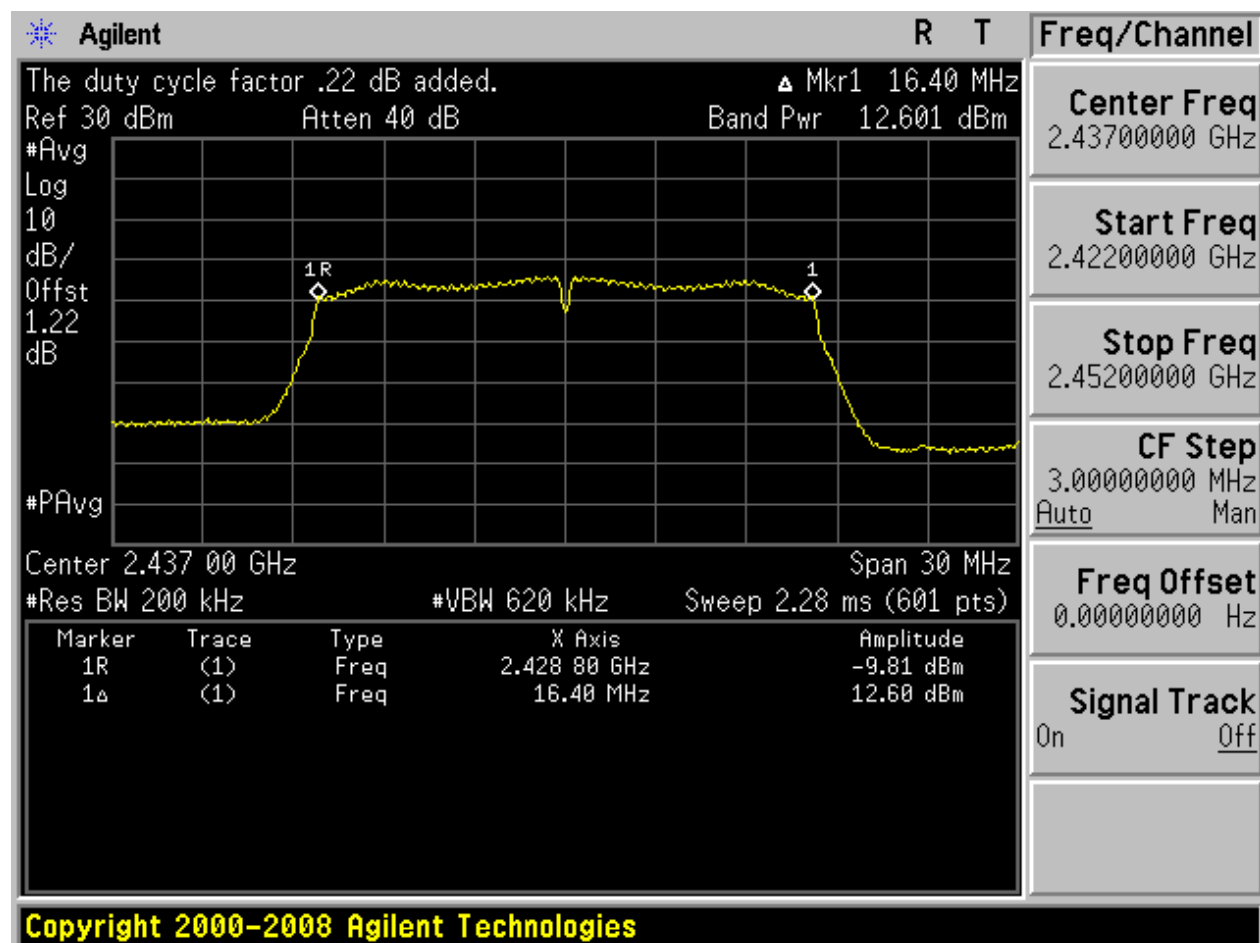




2.10 11G_M@Ant 2

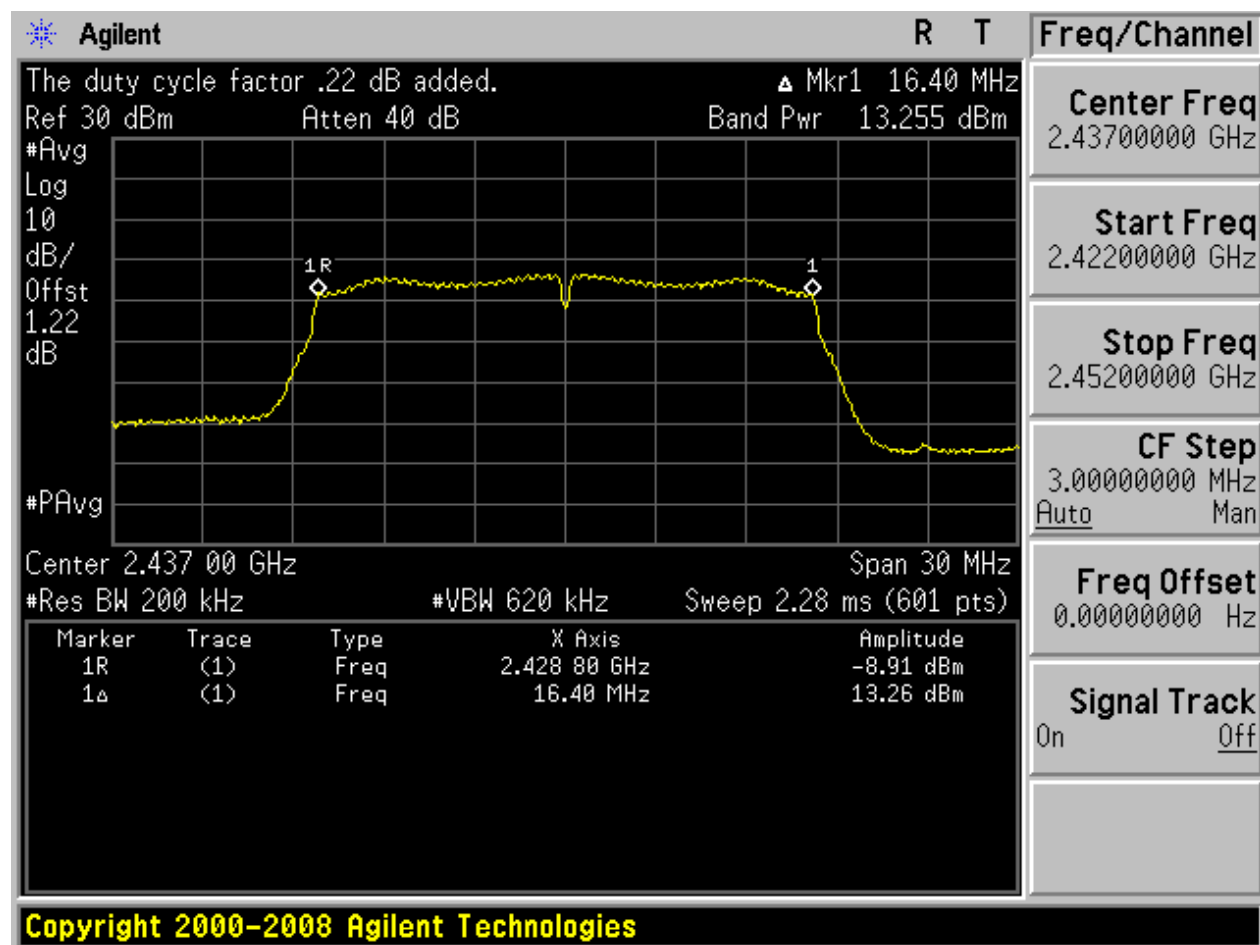




2.11 11G_H@Ant 1

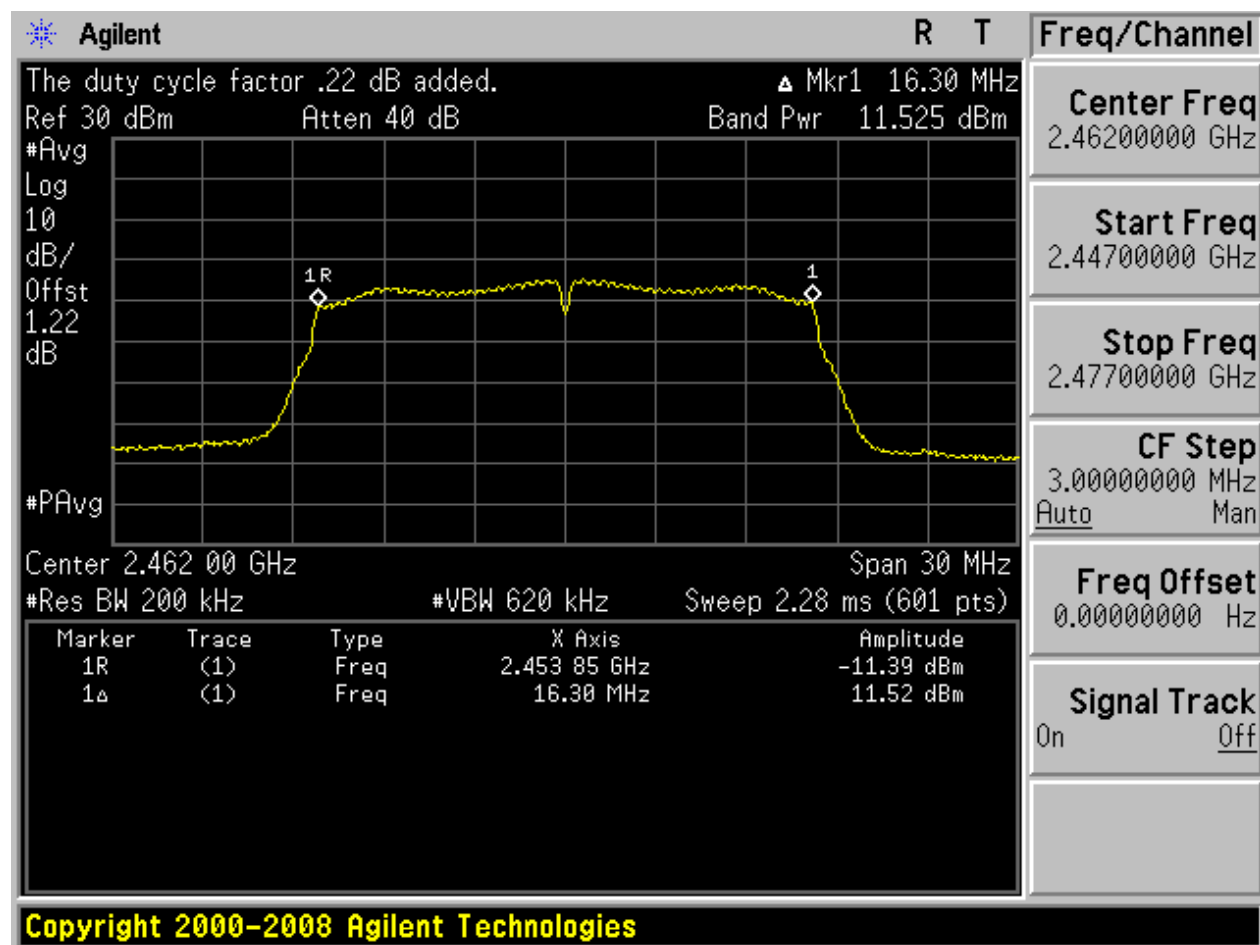




2.12 11G_H@Ant 2

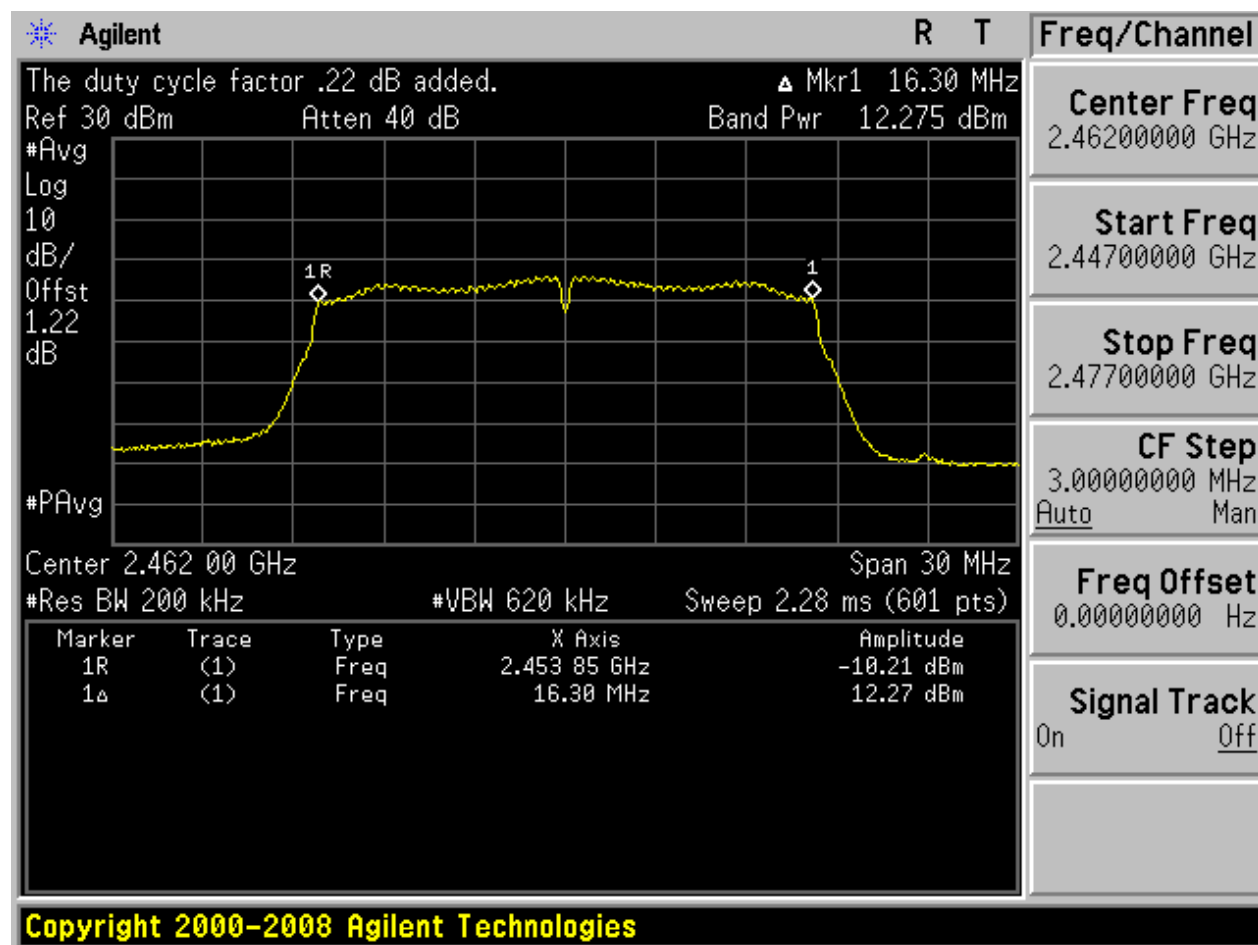




2.13 11N20_L@Ant 1

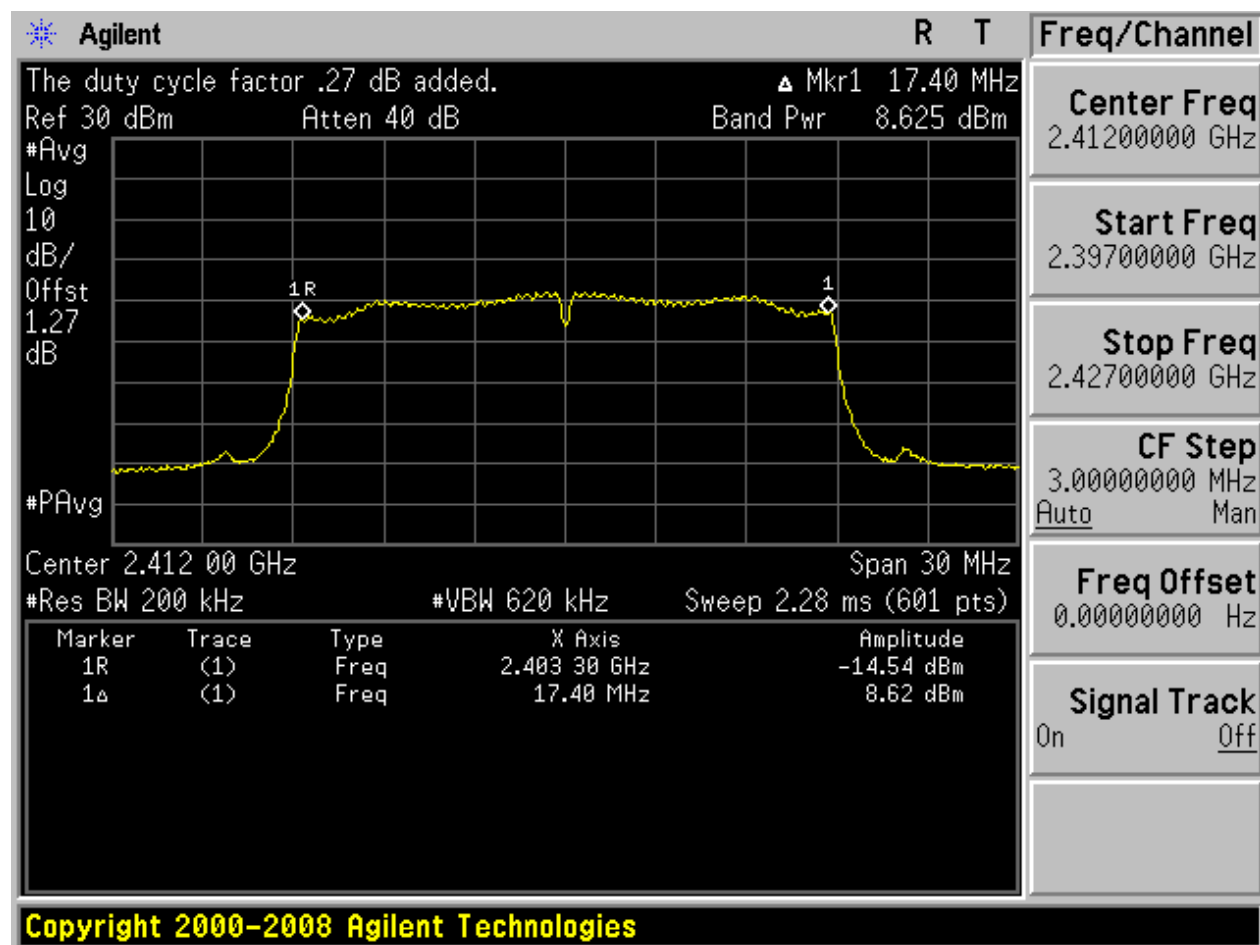




2.14 11N20_L@Ant 2

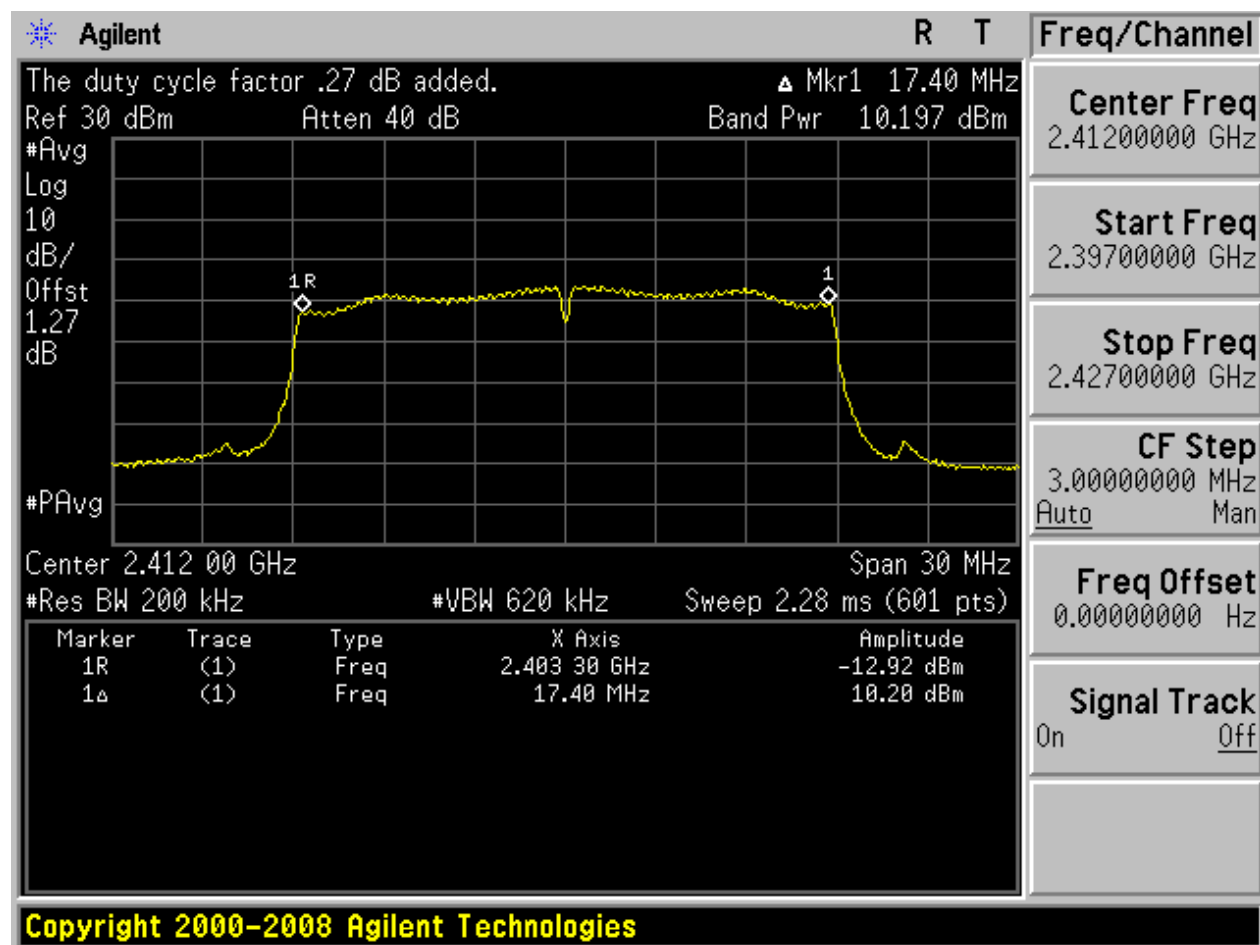




2.15 11N20_M@Ant 1

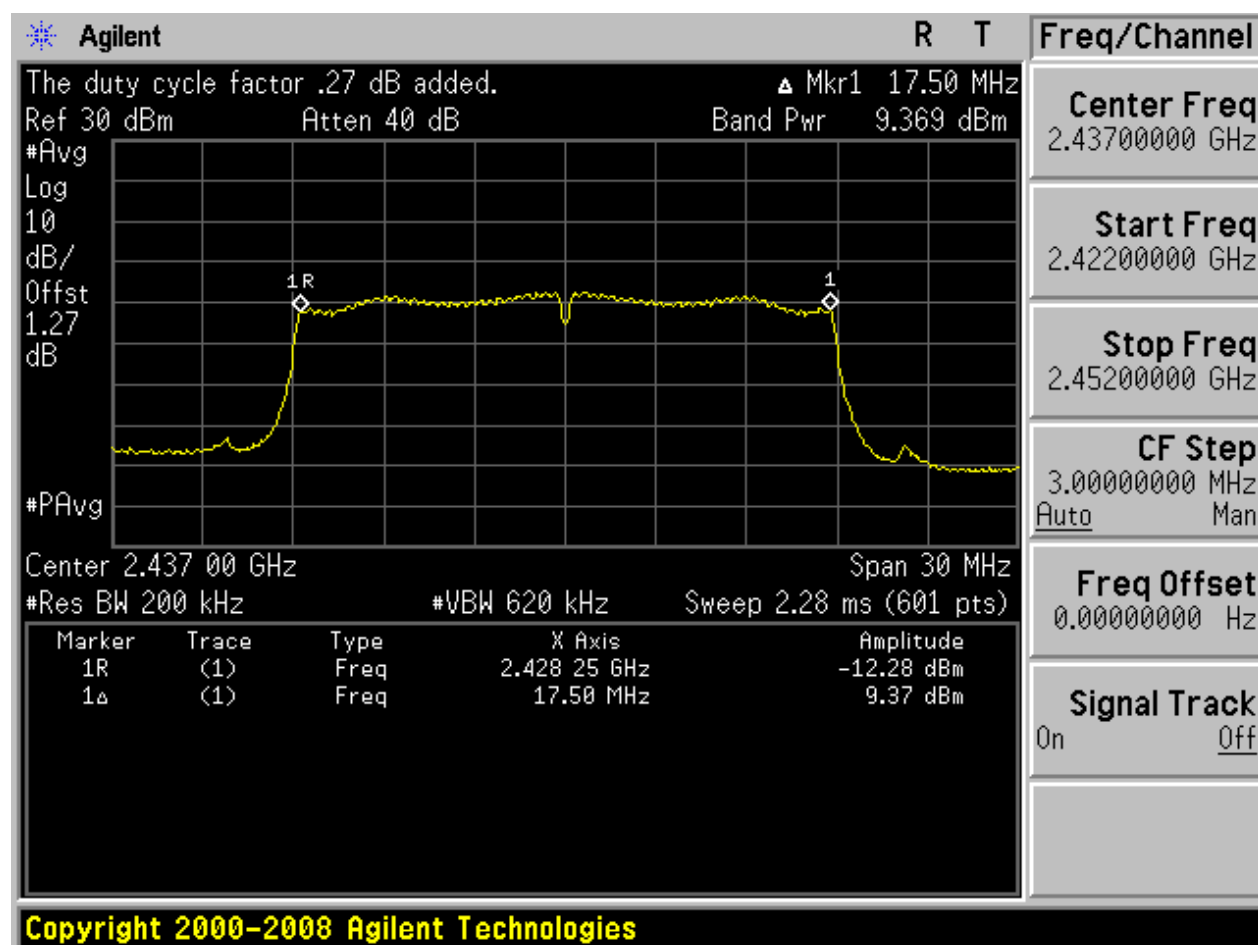




2.16 11N20_M@Ant 2

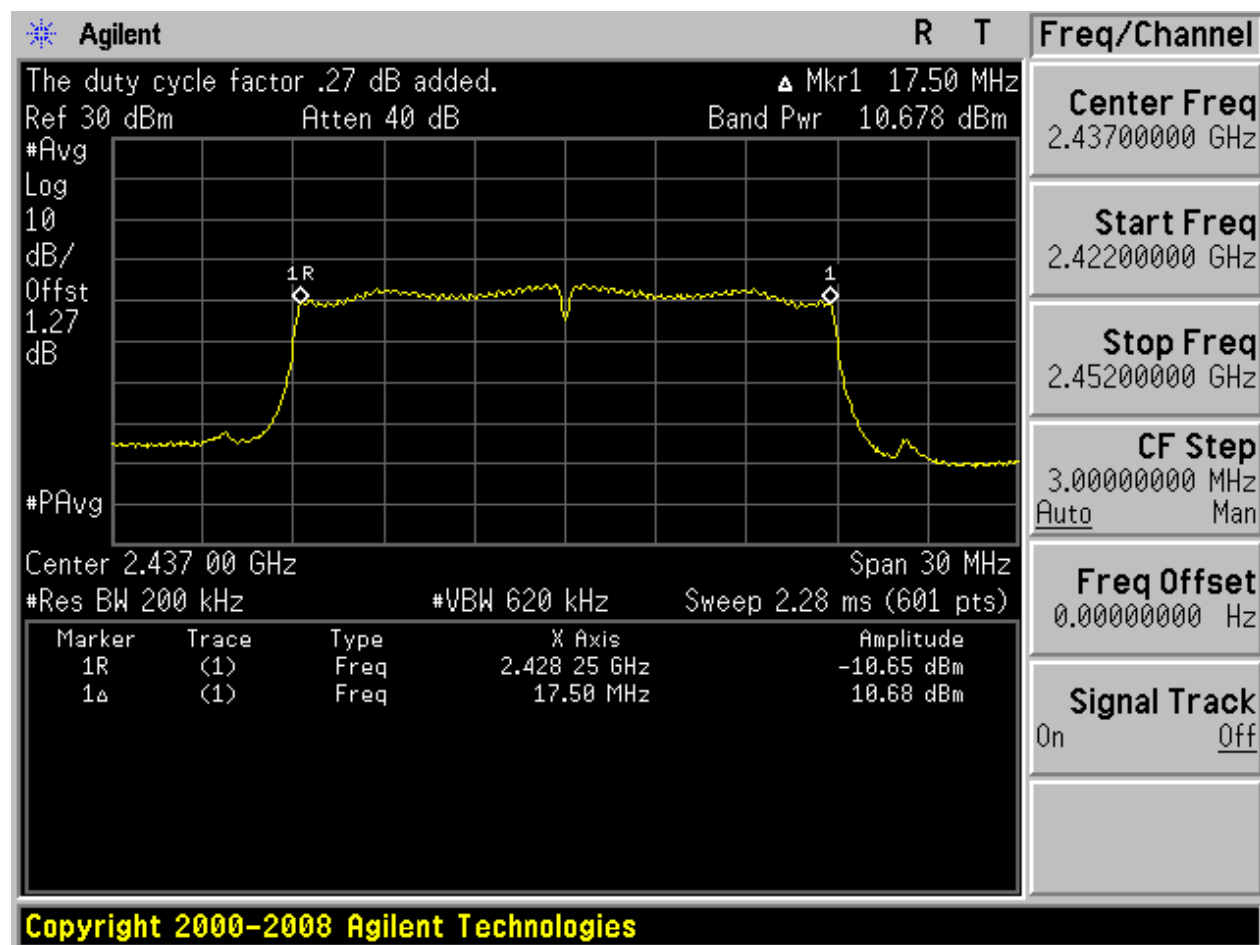




2.17 11N20_H@Ant 1

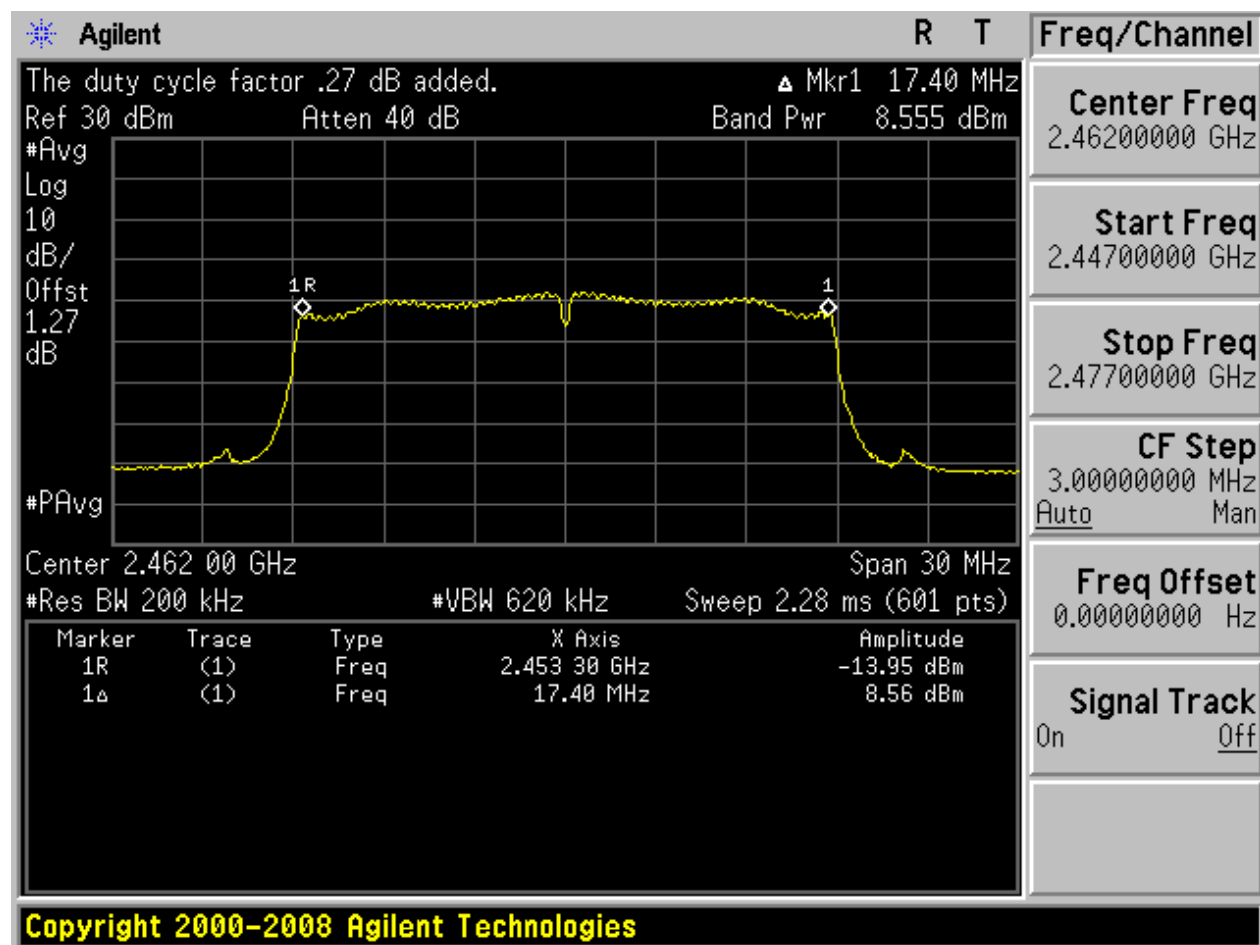




2.18 11N20_H@Ant 2

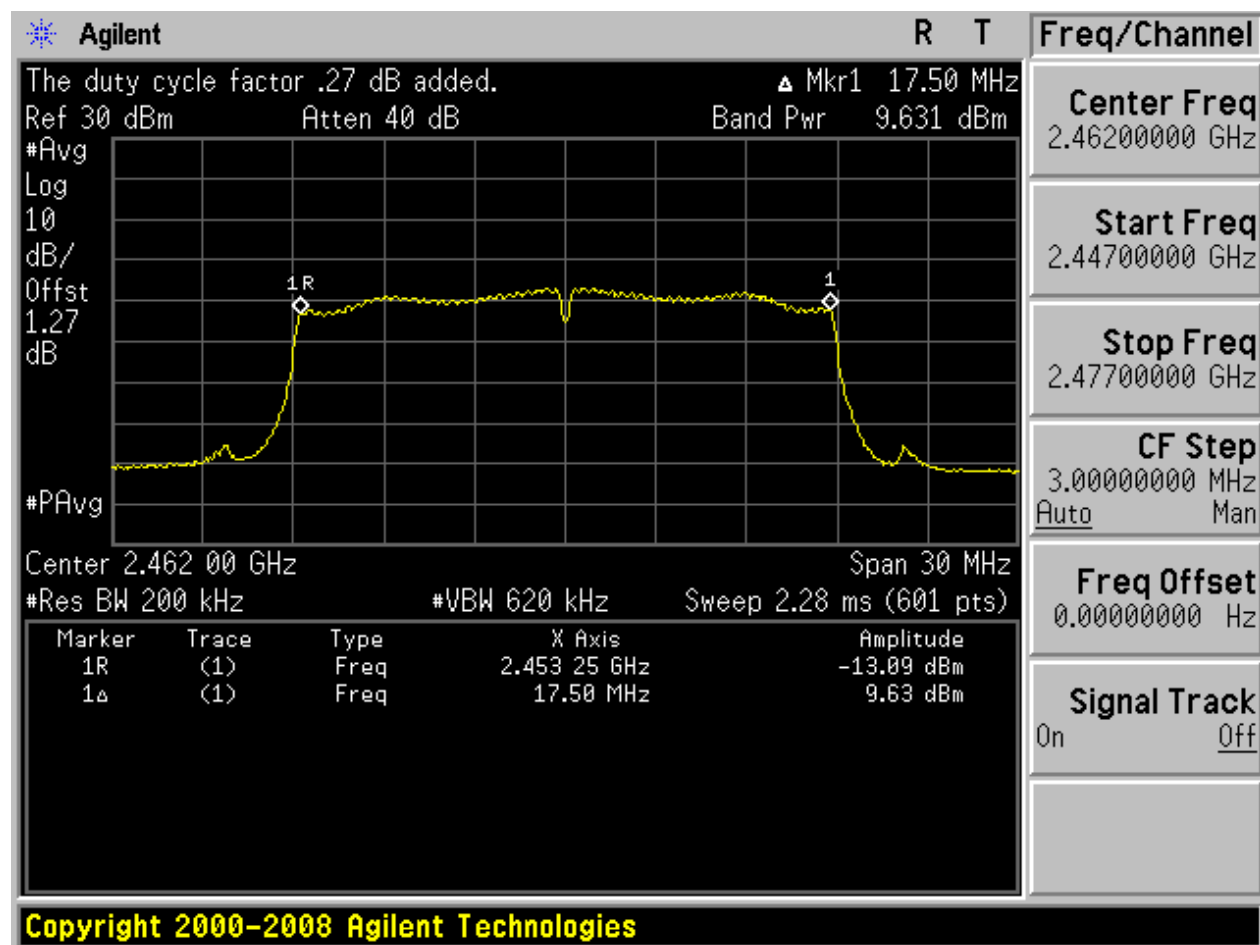




2.19 11N40_L@Ant 1

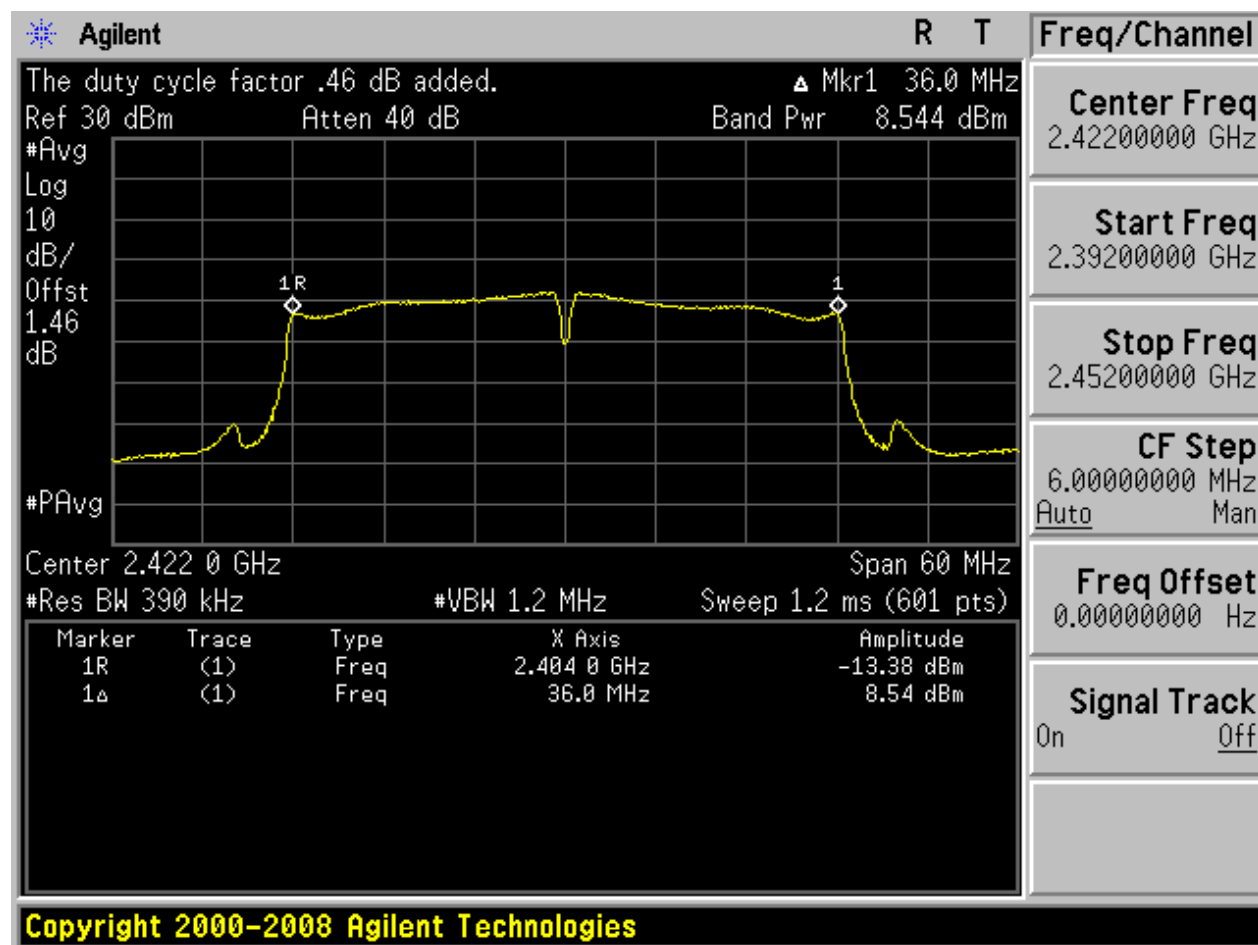




2.20 11N40_L@Ant 2

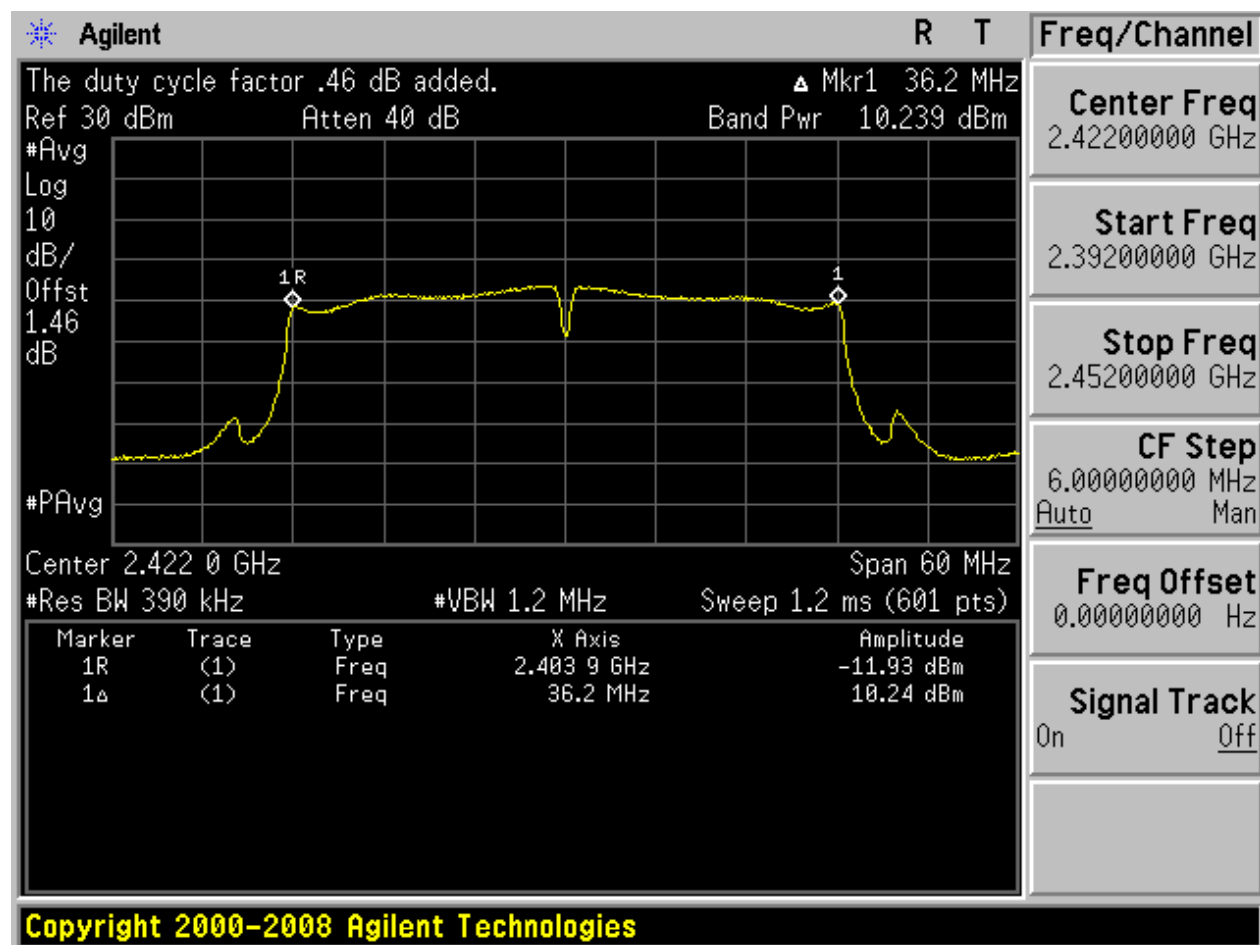




2.13 11N20m_L@Ant 1

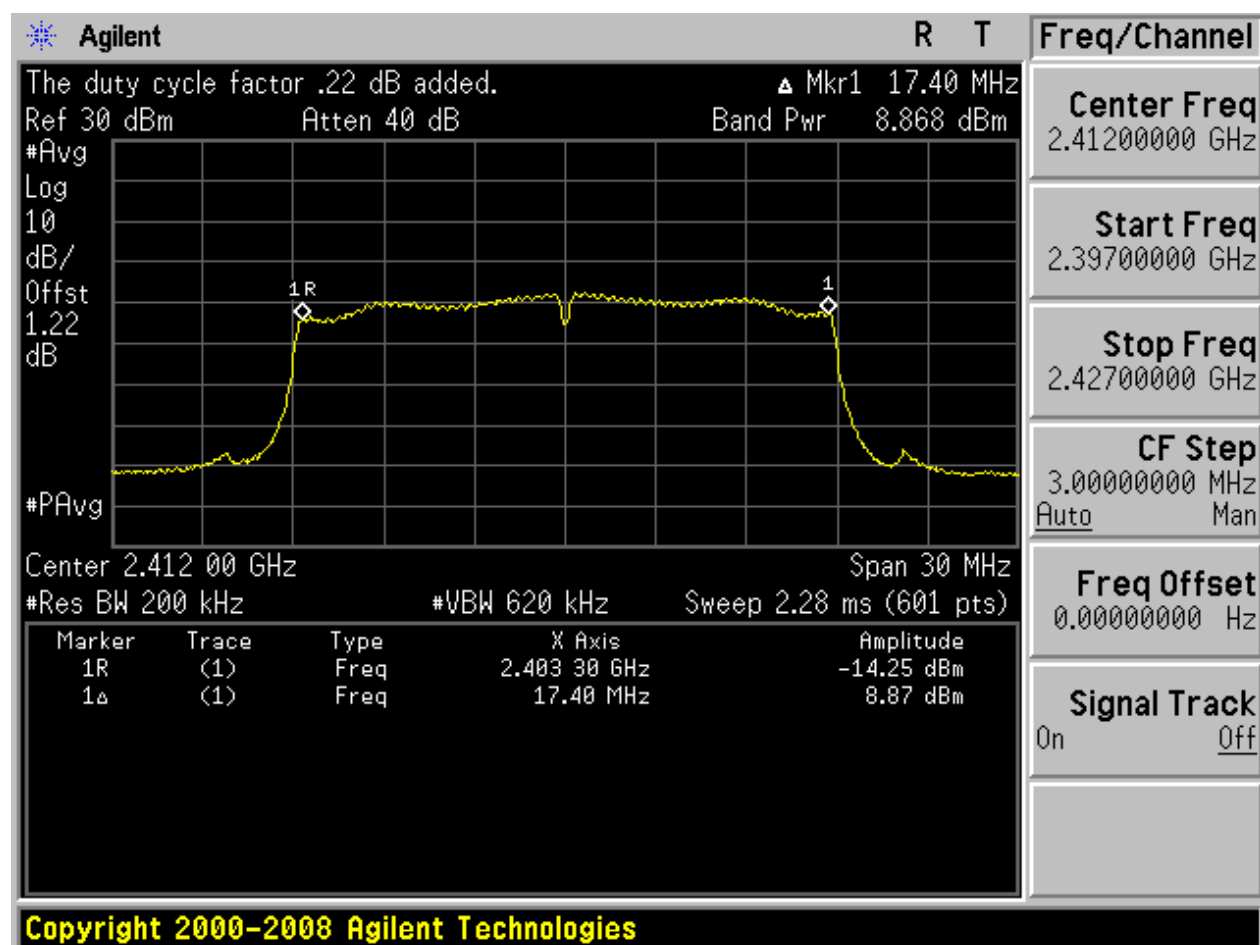




2.14 11N20m_L@Ant 2

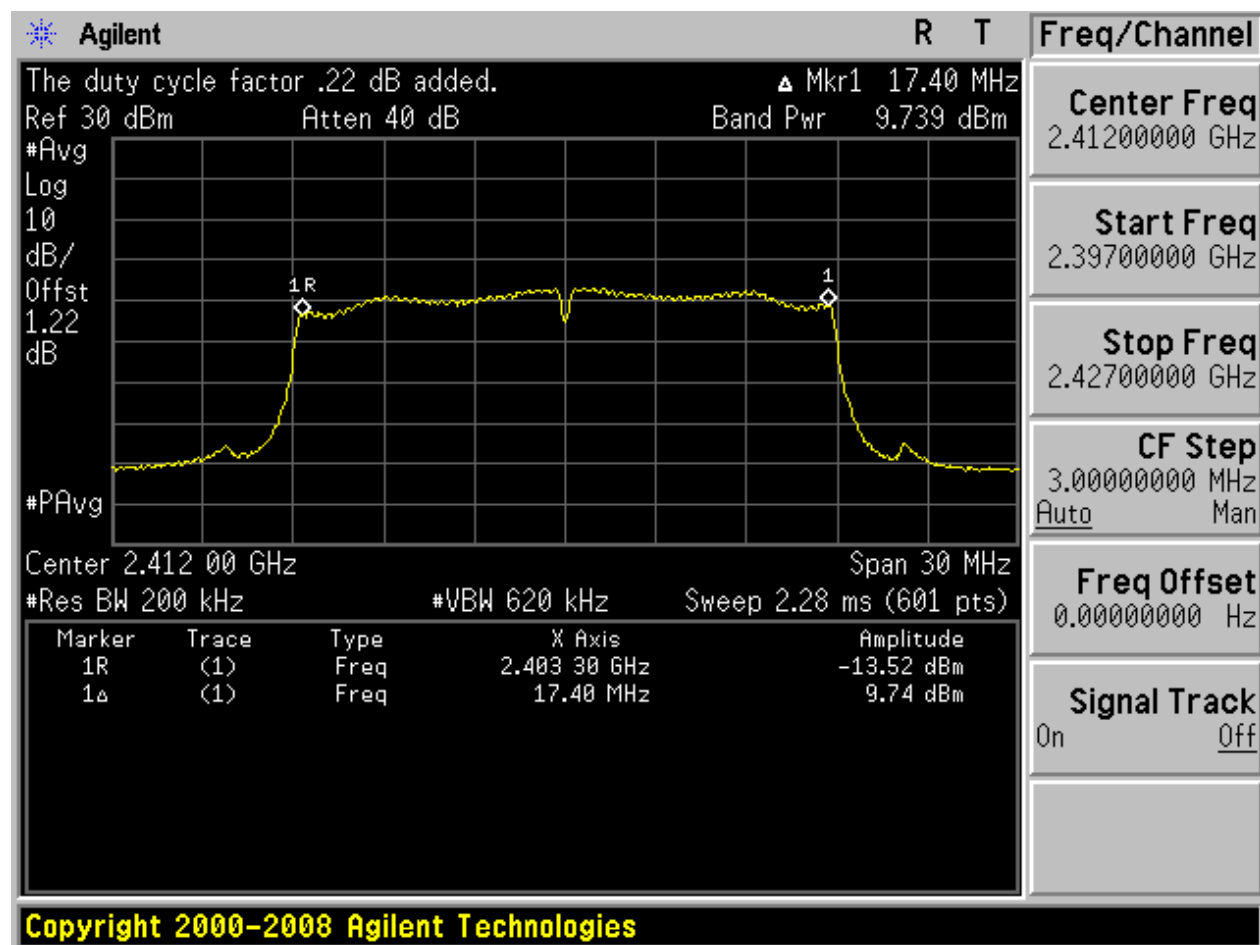




2.15 11N20m_M@Ant 1

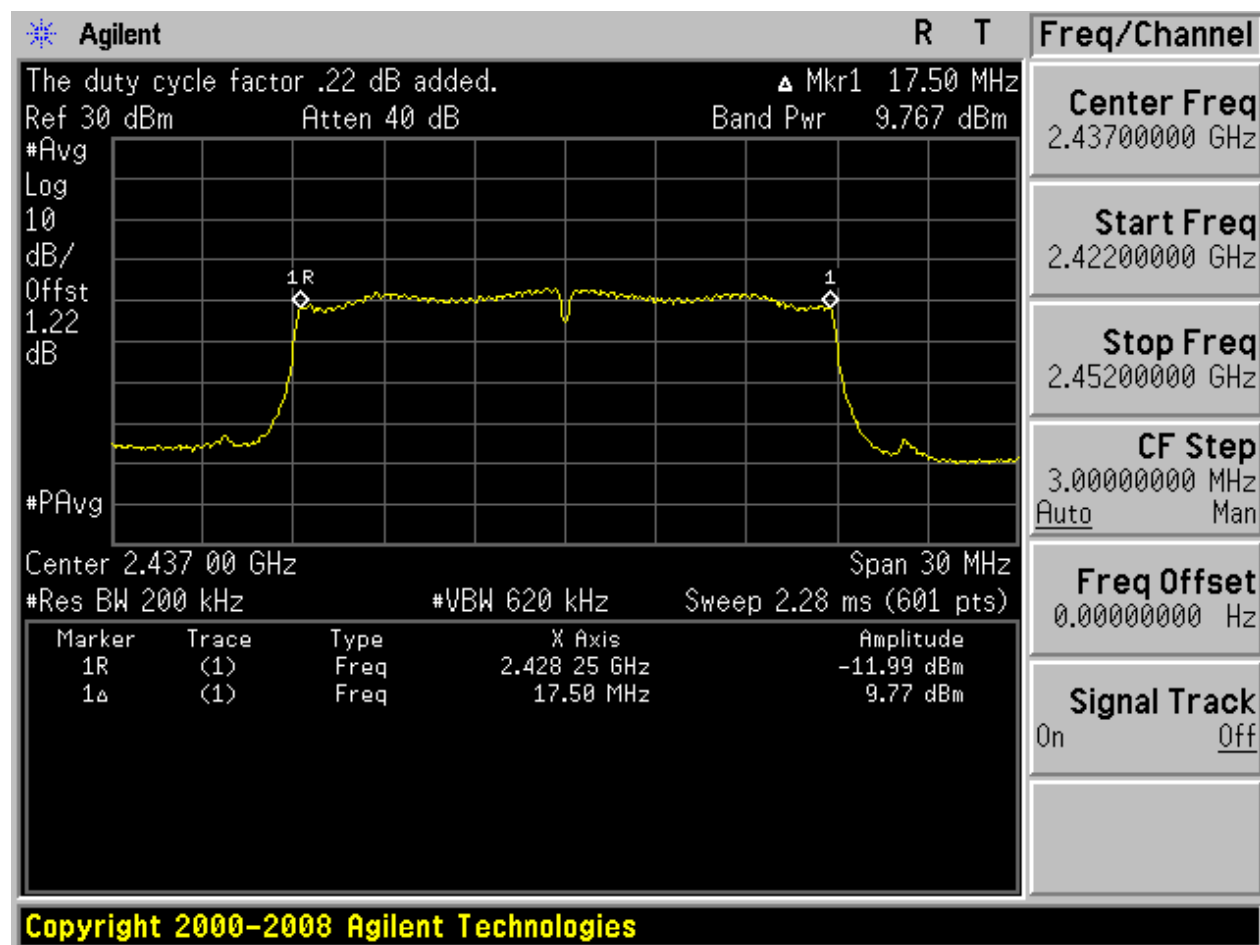




2.16 11N20m_M@Ant 2

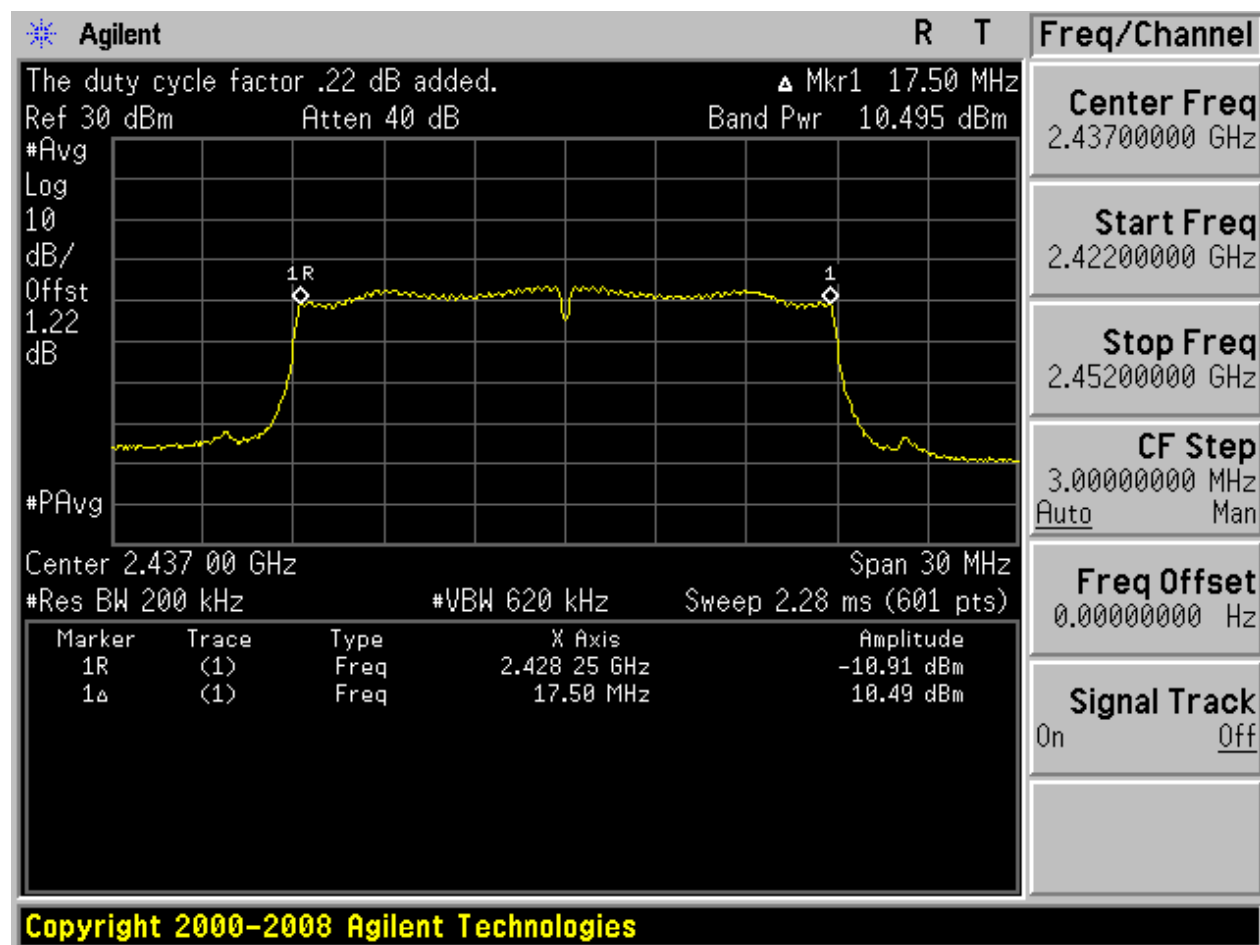




2.17 11N20m_H@Ant 1

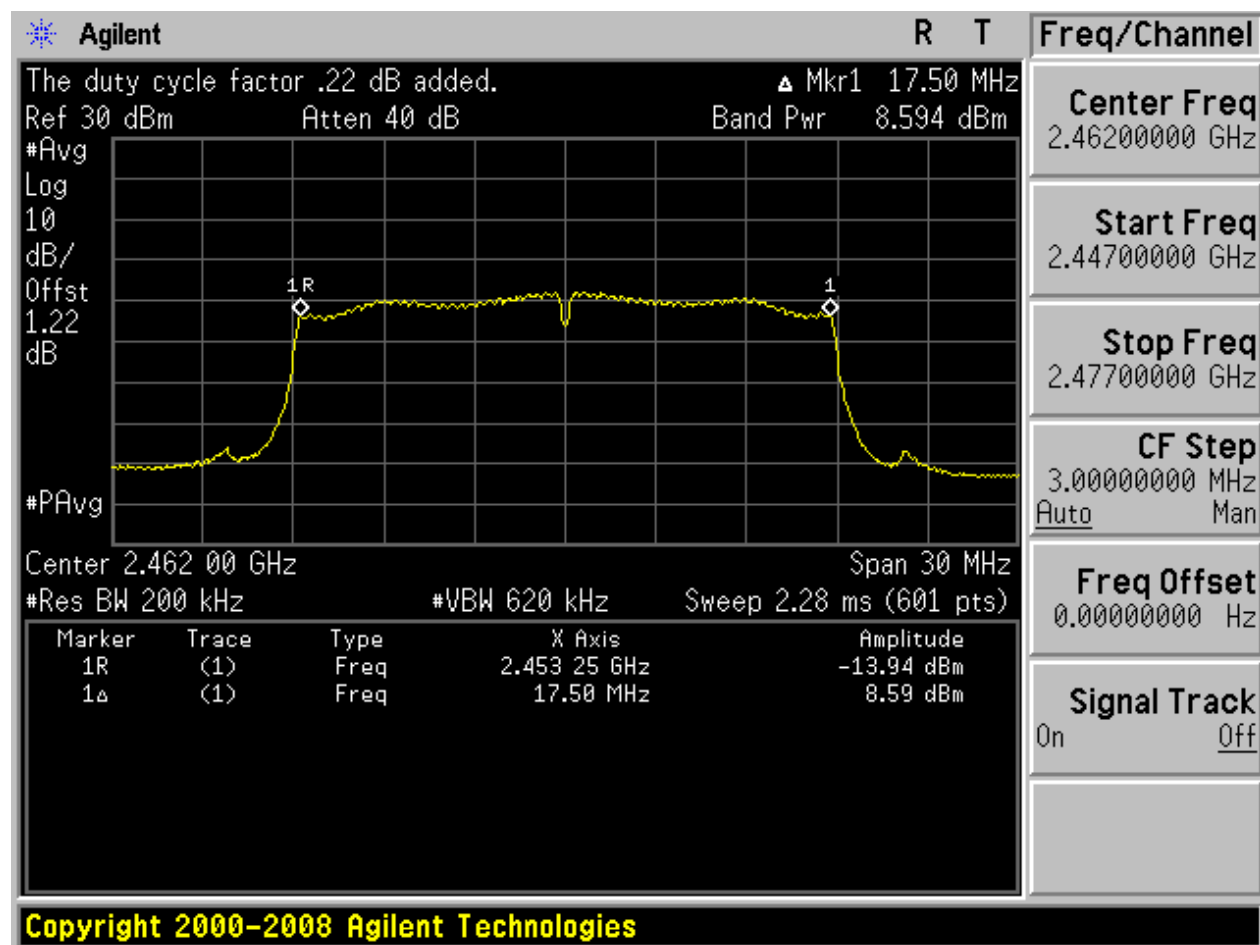




2.18 11N20m_H@Ant 2

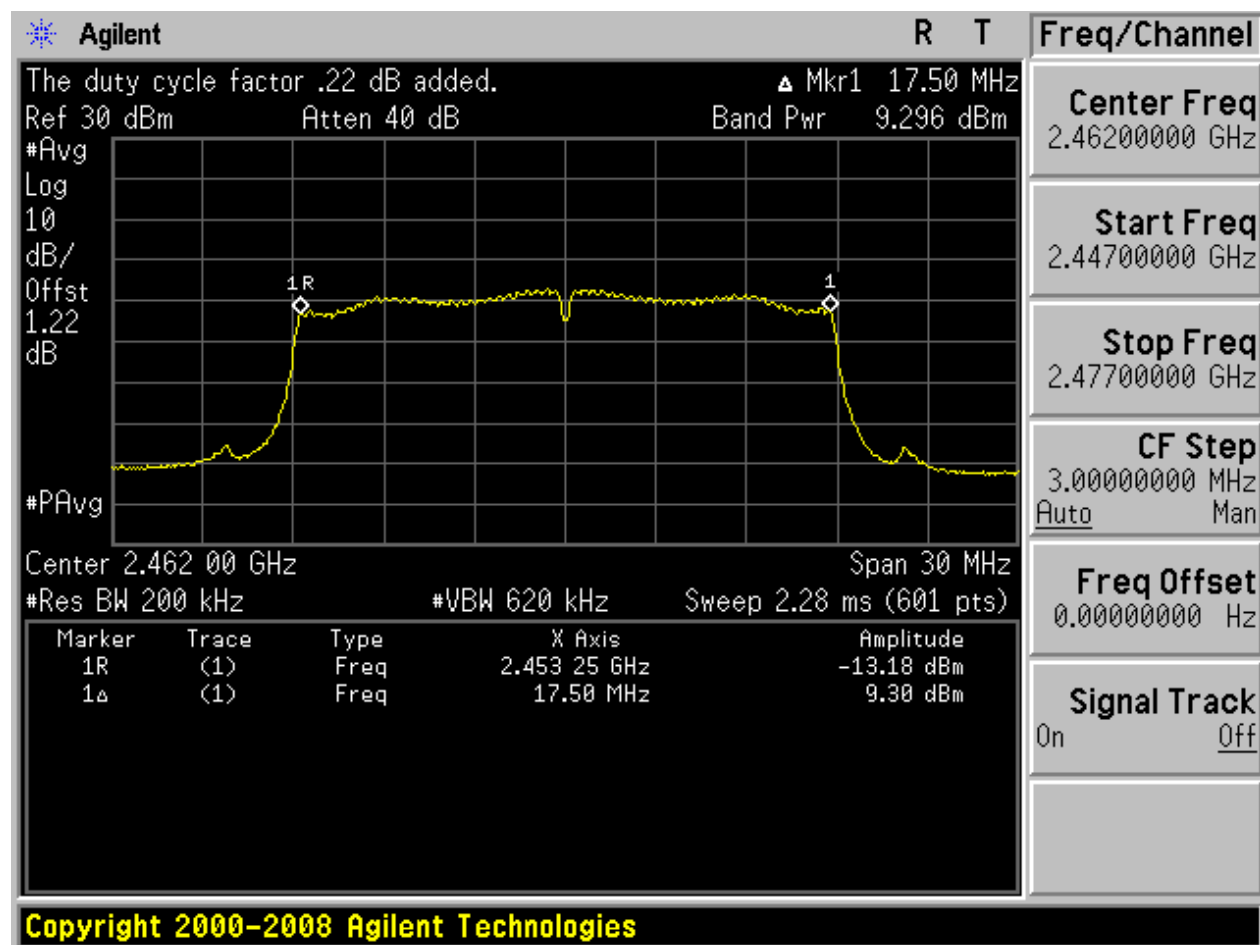




2.19 11N40_L@Ant 1

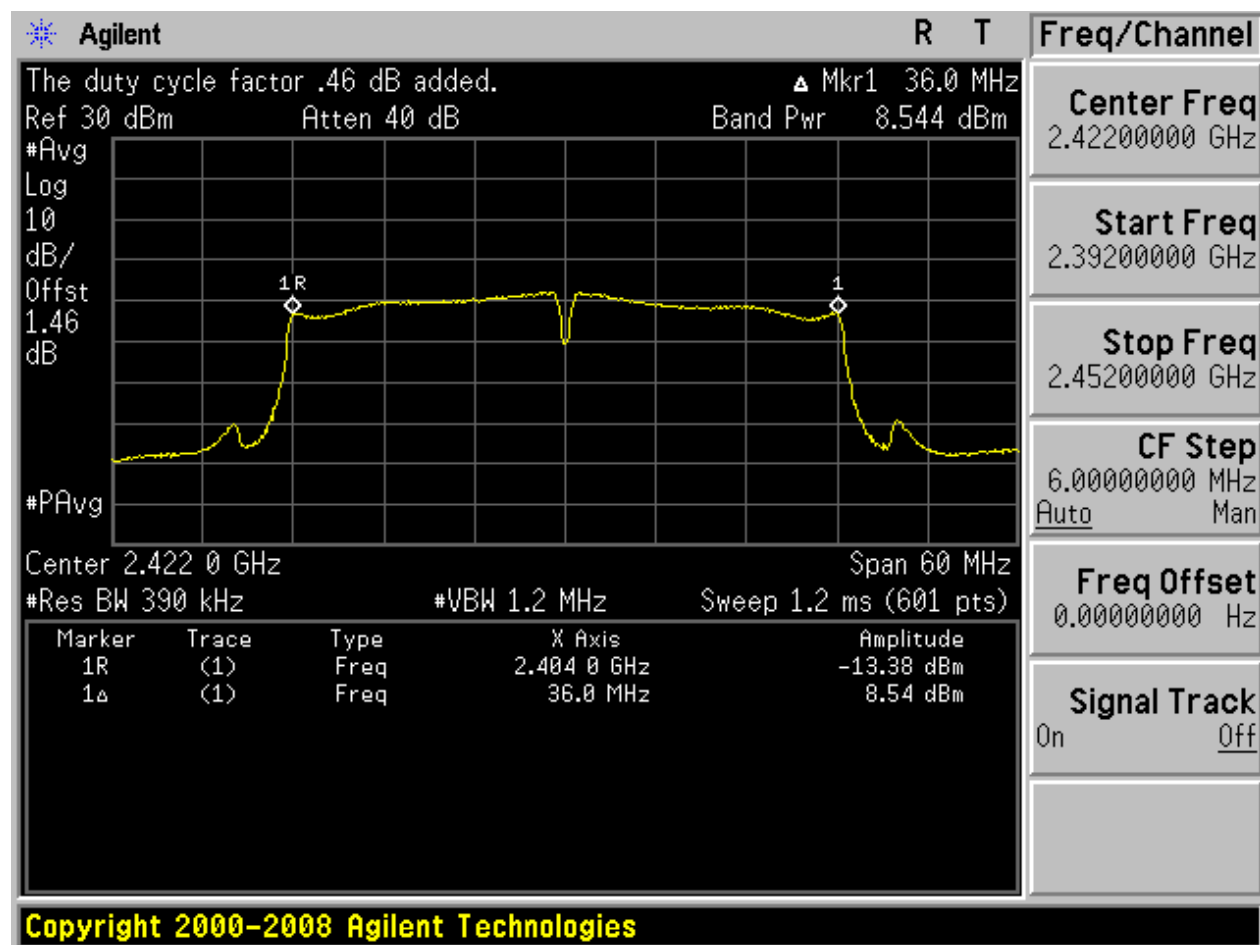




2.20 11N40_L@Ant 2

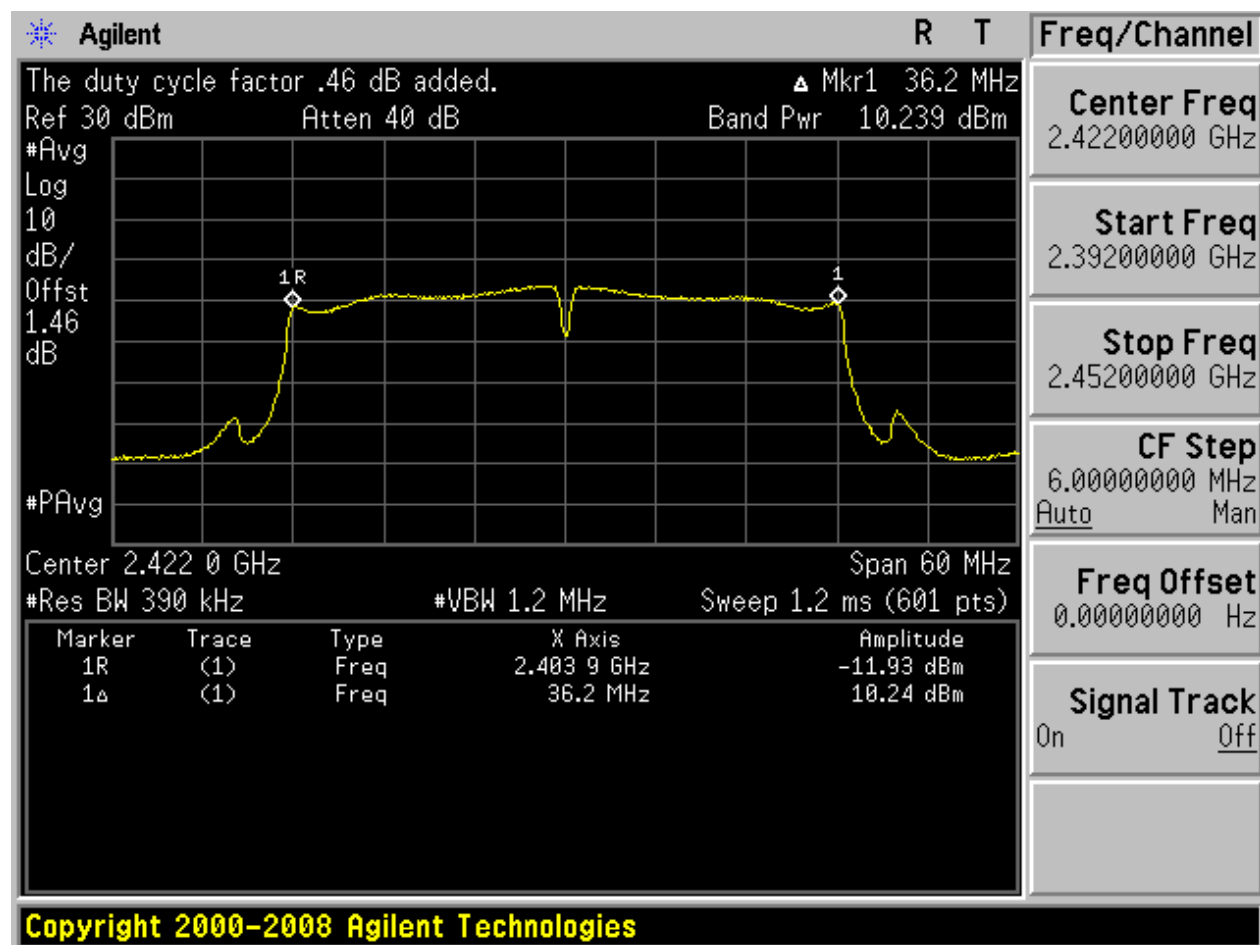




2.21 11N40_M@Ant 1

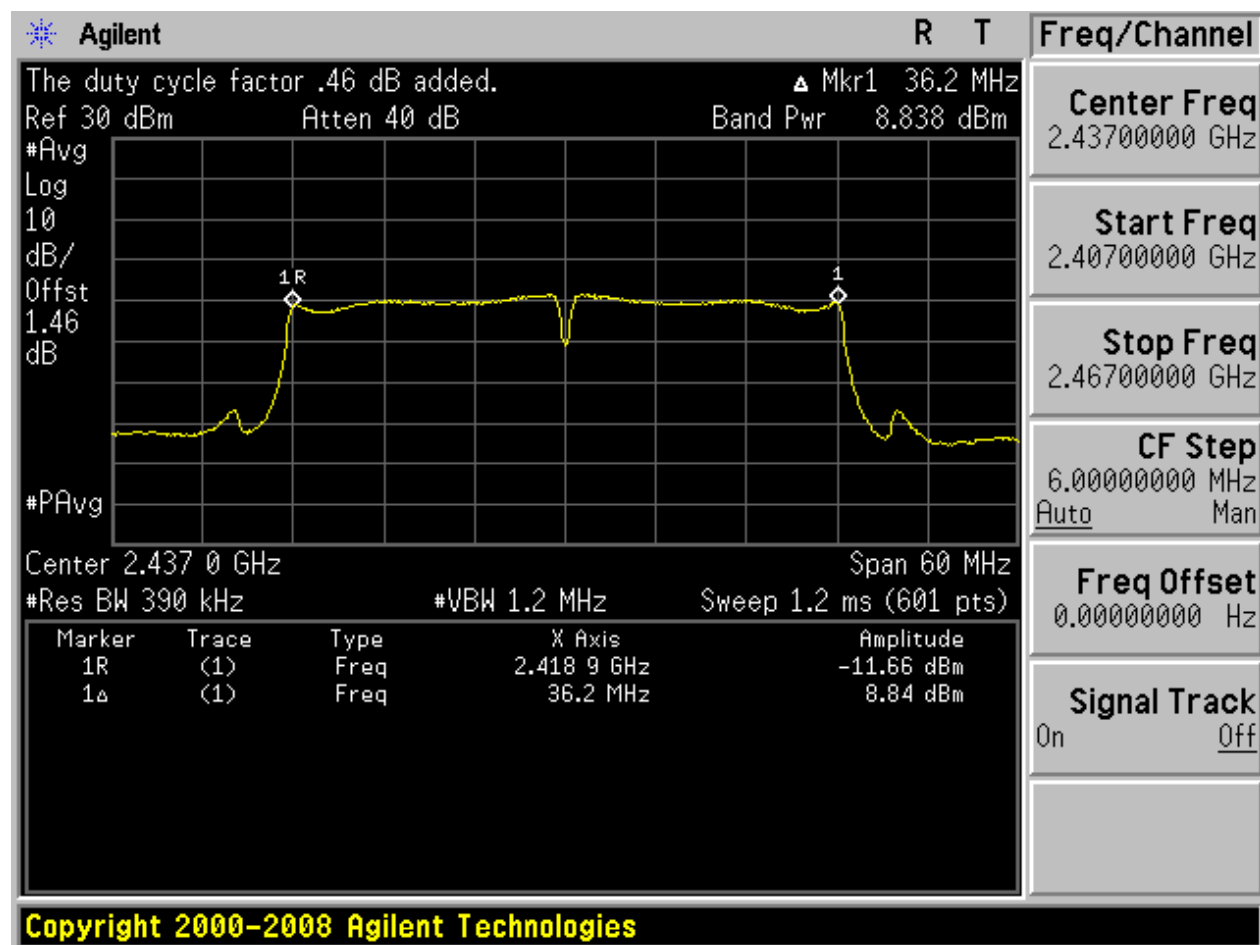




2.22 11N40_M@Ant 2

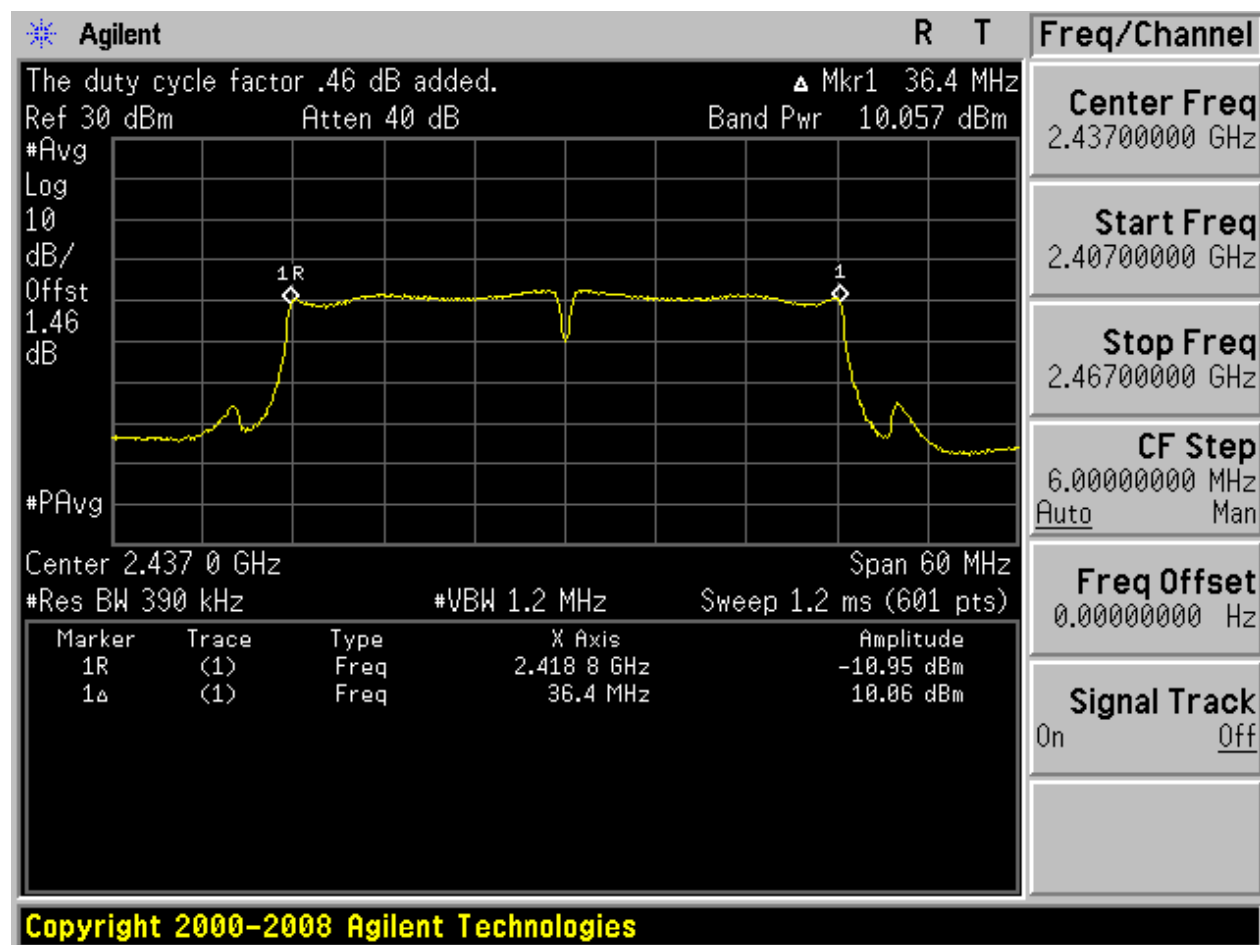


2.23 11N40_H@Ant 1

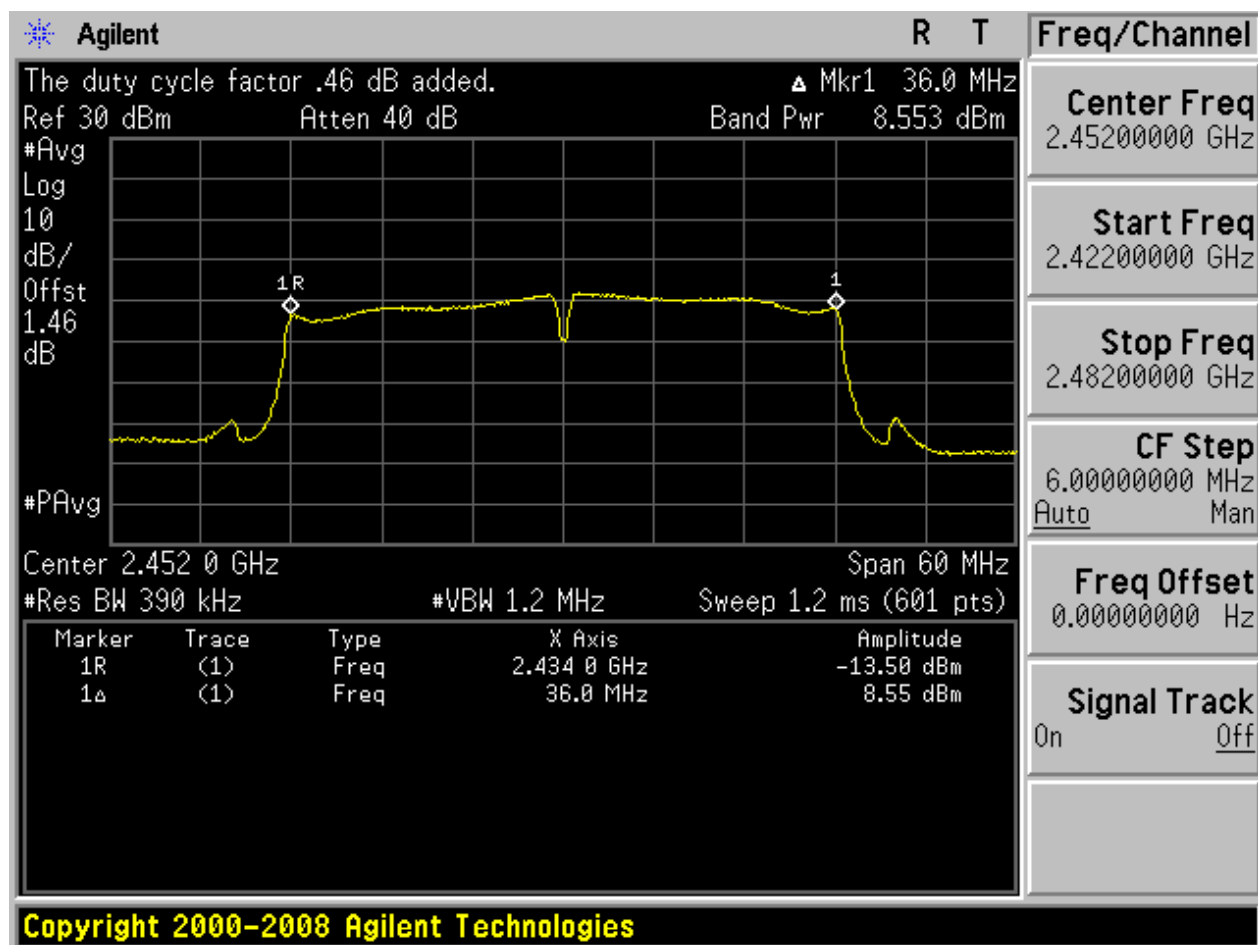




2.24 11N40_H@Ant 2

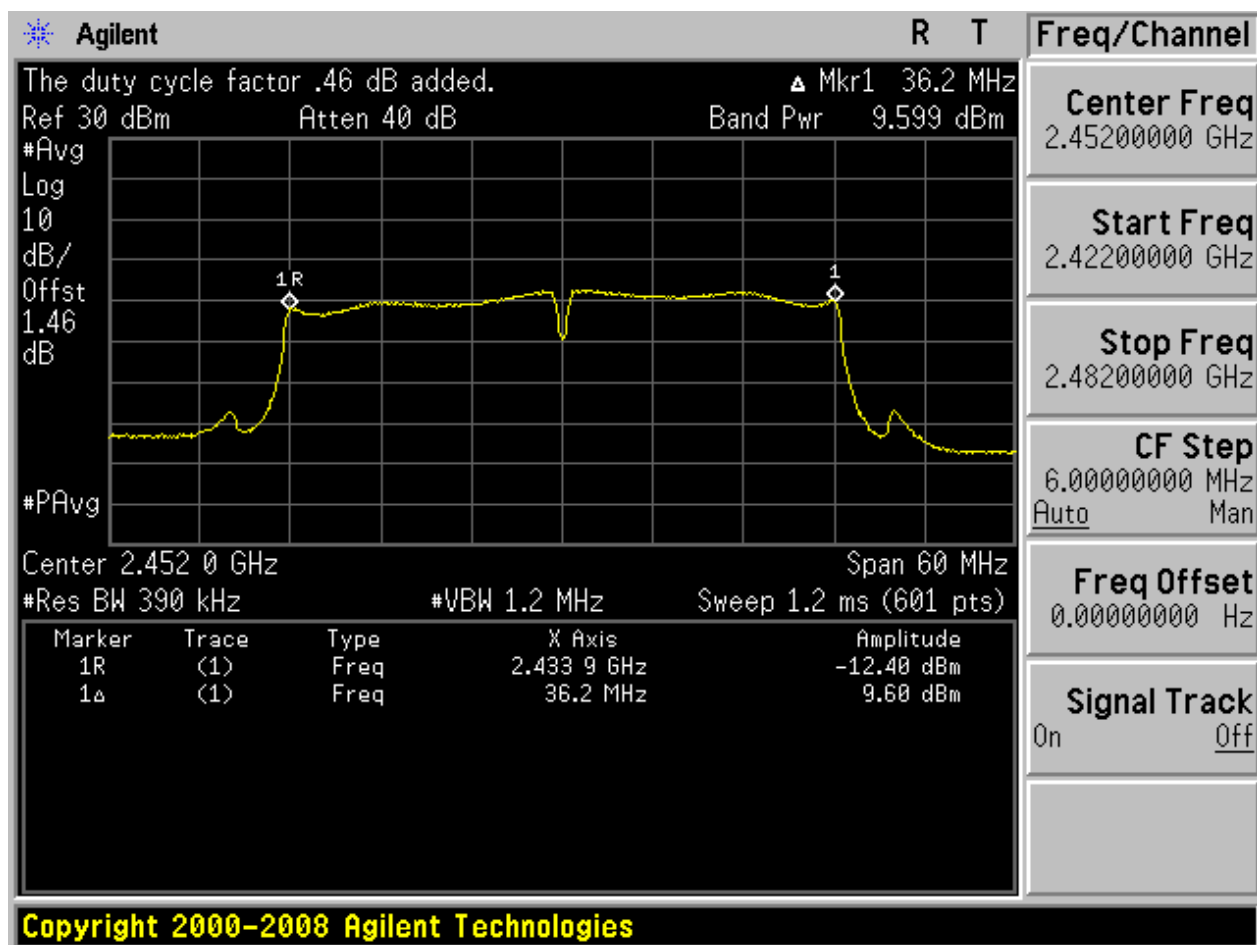




2.31 11N40m_L@Ant 1

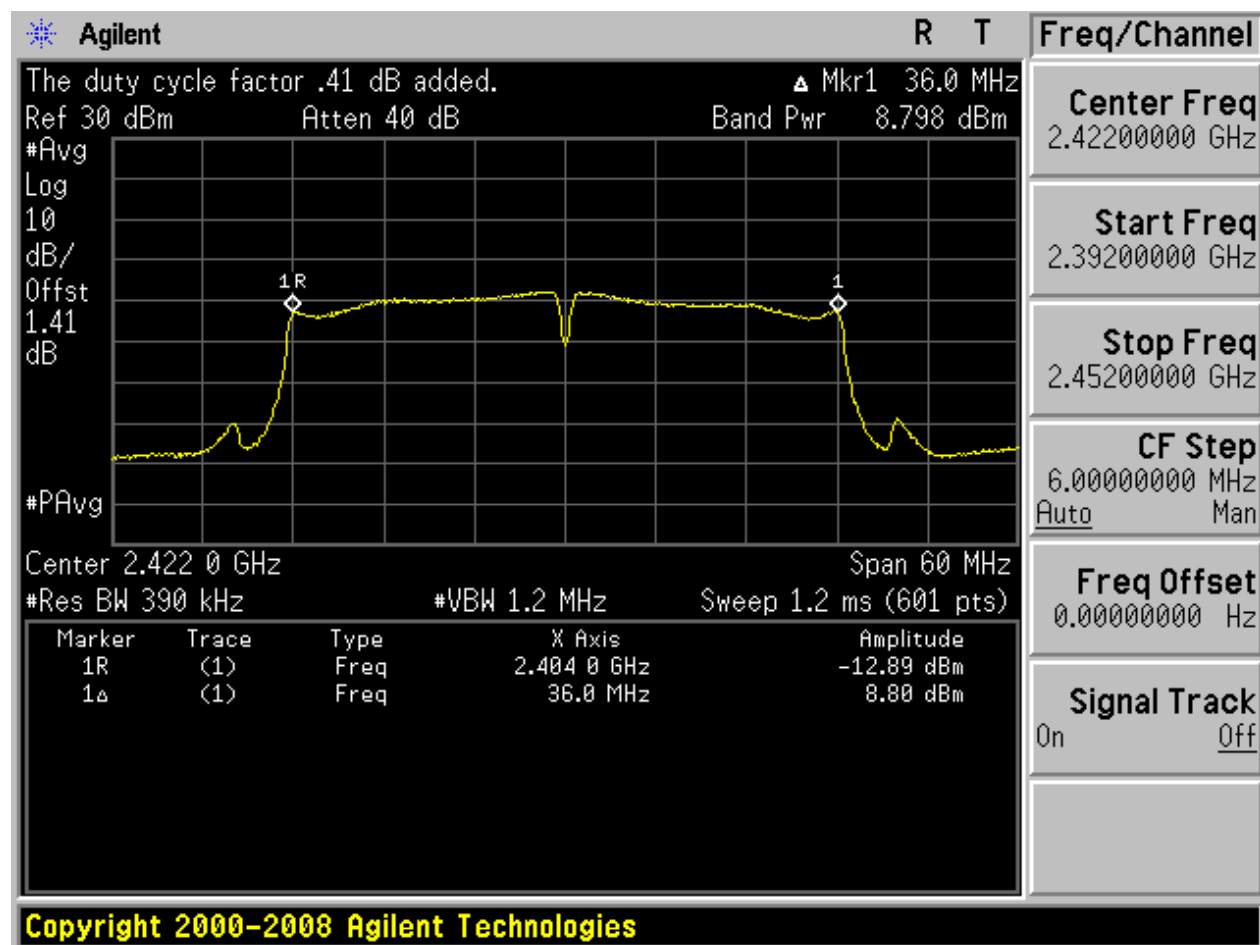




2.32 11N40m_L@Ant 2

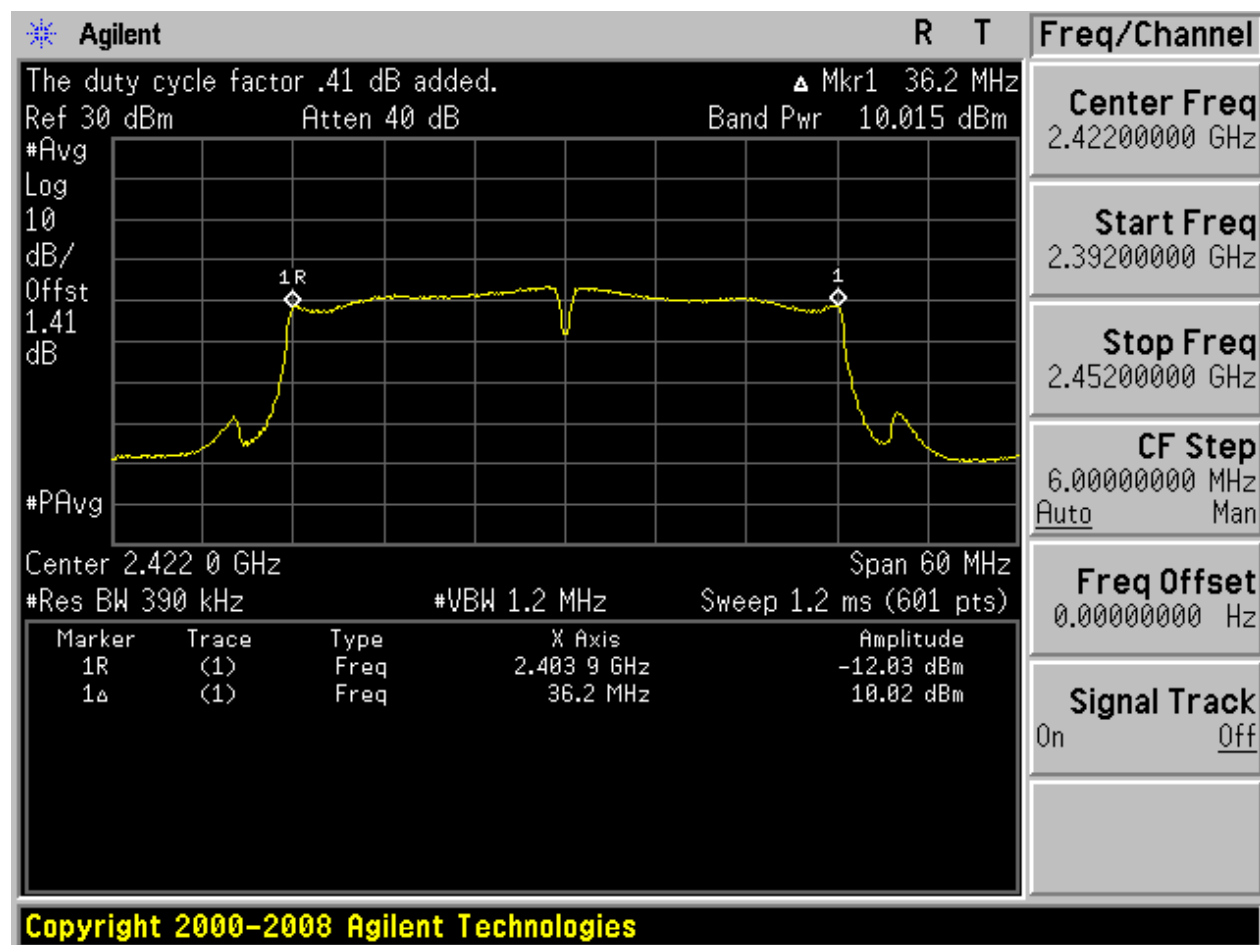




2.33 11N40m_M@Ant 1

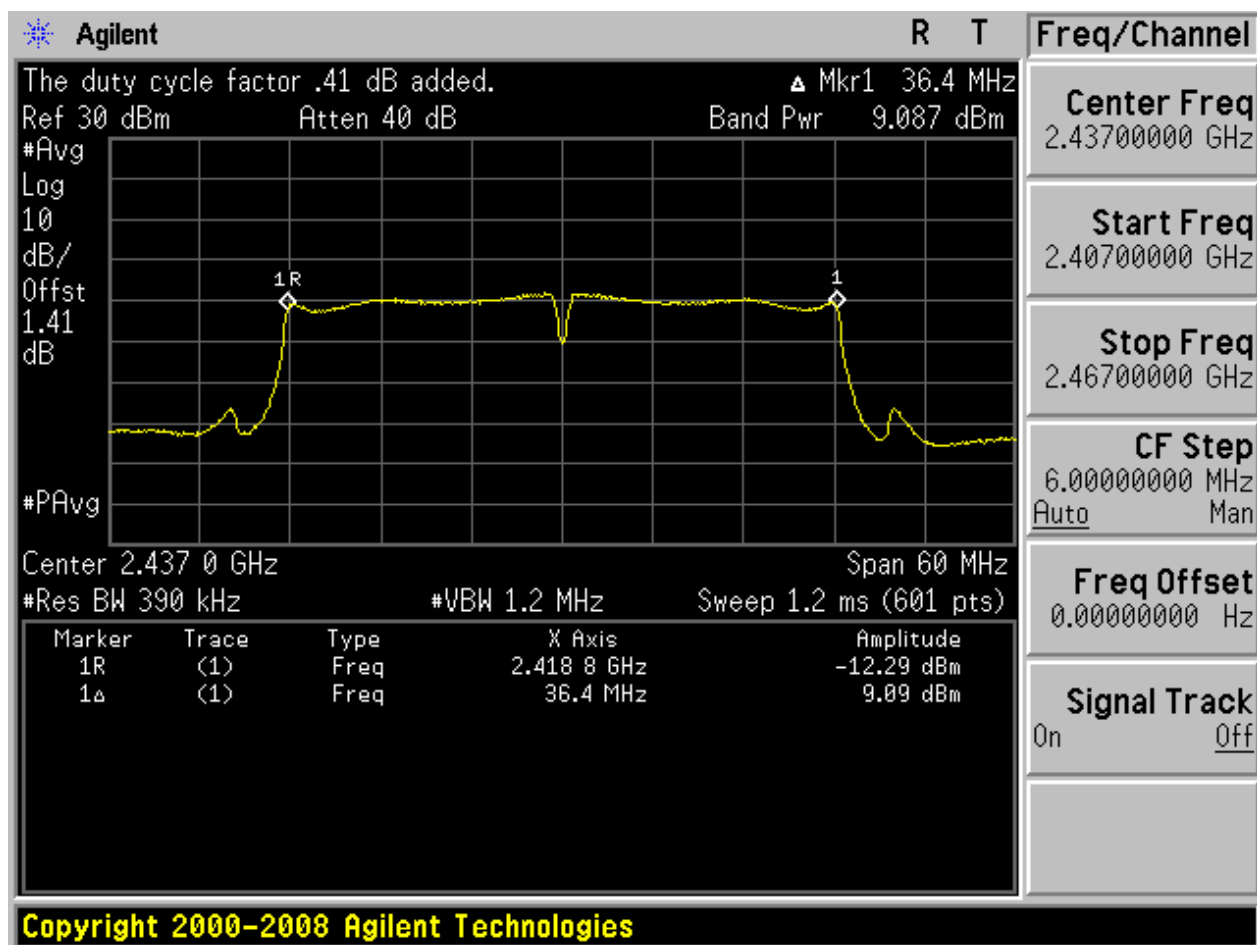




2.34 11N40m_M@Ant 2

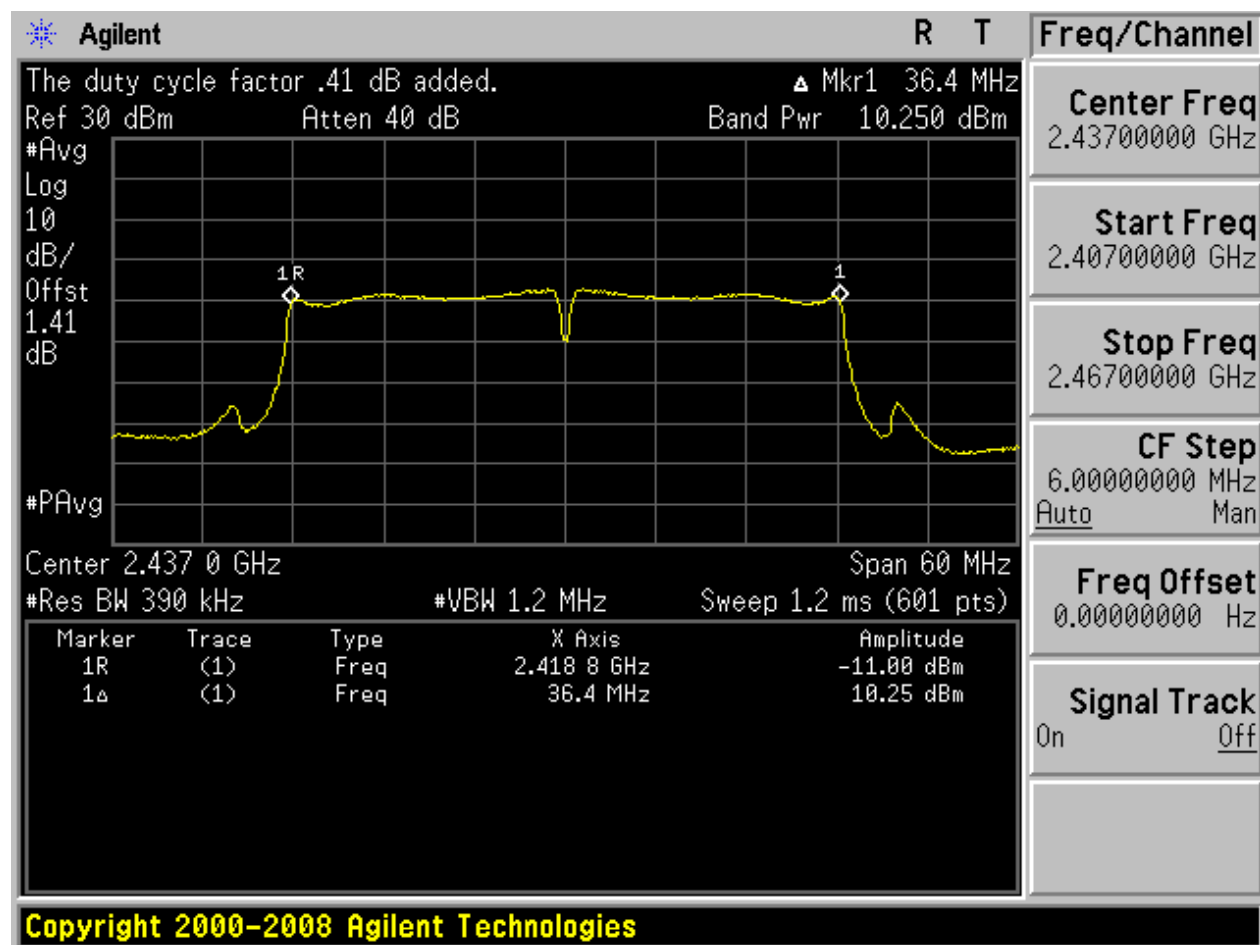




2.35 11N40m_H@Ant 1

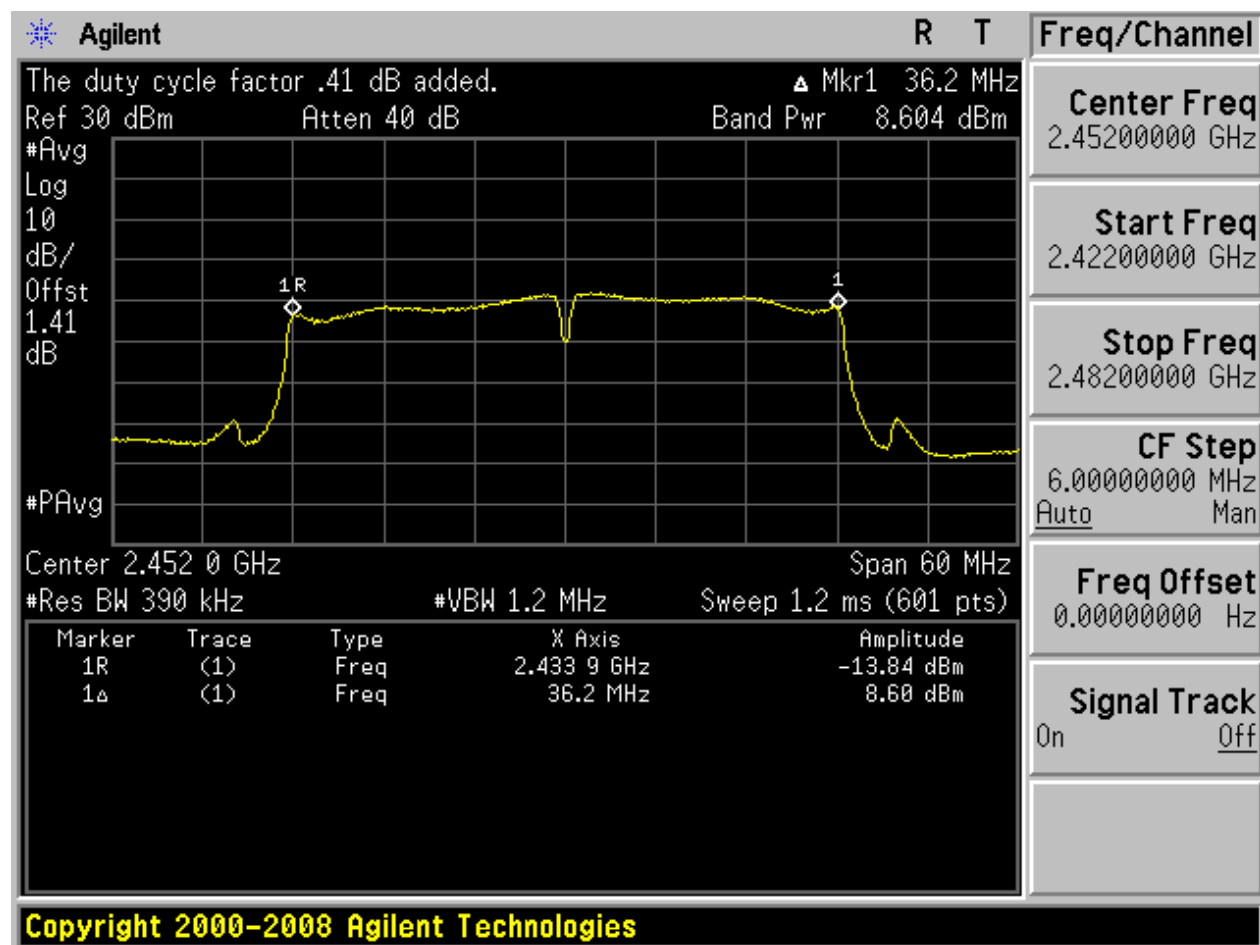



2.36 11N40m_H@Ant 2

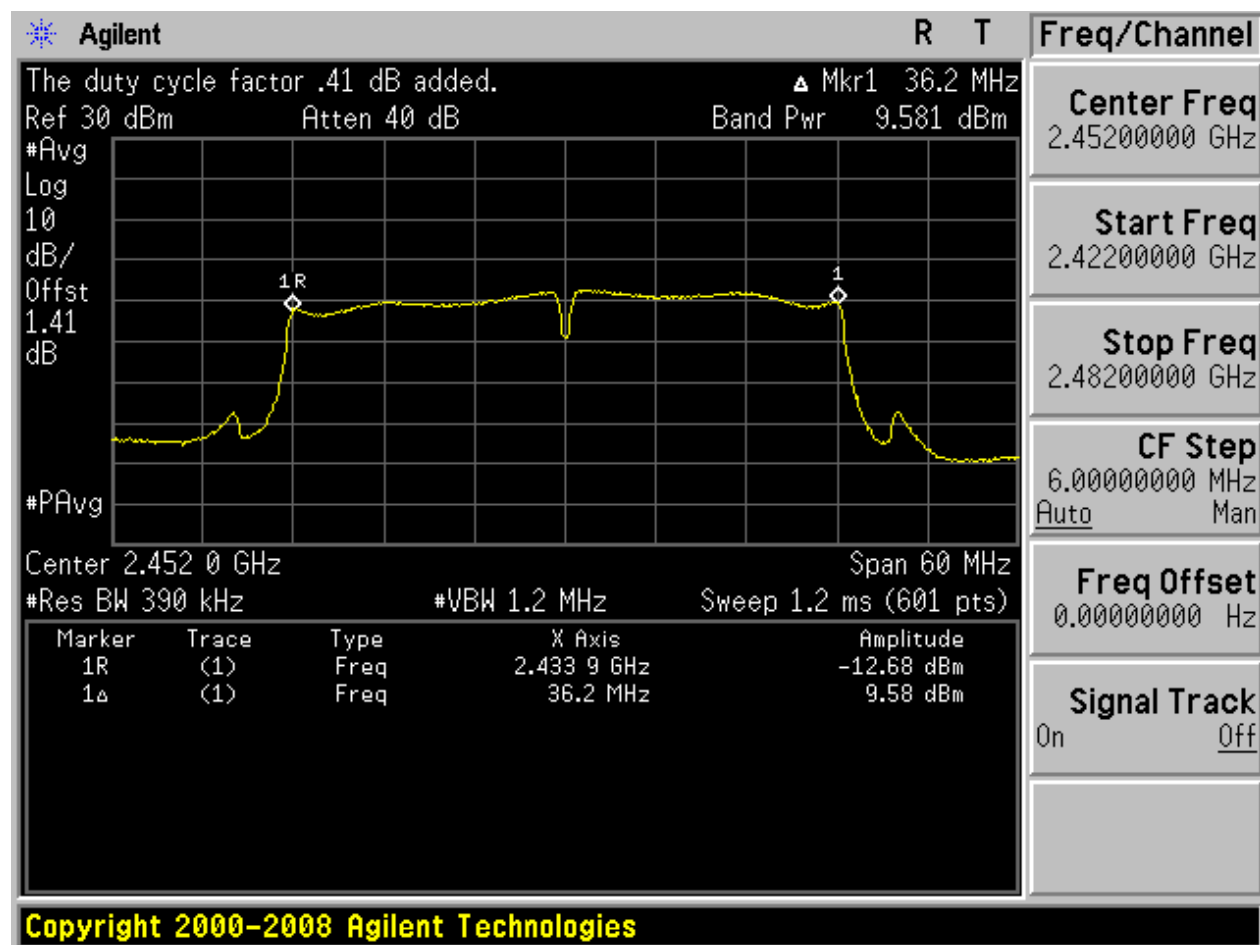


Appendix D: Maximum Power Spectral Density Level

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	PD[MHz]	Verdict
11B	L	2412	Ant 1	-10.65	pass
11B	L	2412	Ant 2	-9.91	pass
11B	M	2437	Ant 1	-10.12	pass
11B	M	2437	Ant 2	-9.31	pass
11B	H	2462	Ant 1	-10.92	pass
11B	H	2462	Ant 2	-10.33	pass
11G	L	2412	Ant 1	-16.77	pass
11G	L	2412	Ant 2	-15.88	pass
11G	M	2437	Ant 1	-16.18	pass
11G	M	2437	Ant 2	-15.37	pass
11G	H	2462	Ant 1	-16.68	pass
11G	H	2462	Ant 2	-16.06	pass
11N20	L	2412	Ant 1	-19.95	pass
11N20	L	2412	Ant 2	-18.36	pass
11N20	M	2437	Ant 1	-19.59	pass
11N20	M	2437	Ant 2	-18.17	pass
11N20	H	2462	Ant 1	-20.11	pass
11N20	H	2462	Ant 2	-18.74	pass
11N20m	L	2412	Ant 1	-19.67	pass
11N20m	L	2412	Ant 2	-18.82	pass
11N20m	M	2437	Ant 1	-19.11	pass
11N20m	M	2437	Ant 2	-18.45	pass
11N20m	H	2462	Ant 1	-19.96	pass
11N20m	H	2462	Ant 2	-19.08	pass
11N40	L	2422	Ant 1	-22.87	pass
11N40	L	2422	Ant 2	-21.35	pass
11N40	M	2437	Ant 1	-23.33	pass
11N40	M	2437	Ant 2	-22.47	pass
11N40	H	2452	Ant 1	-23.08	pass
11N40	H	2452	Ant 2	-22.33	pass
11N40m	L	2422	Ant 1	-22.53	pass
11N40m	L	2422	Ant 2	-21.46	pass
11N40m	M	2437	Ant 1	-23.32	pass
11N40m	M	2437	Ant 2	-22.36	pass
11N40m	H	2452	Ant 1	-23.00	pass
11N40m	H	2452	Ant 2	-22.19	pass


Part II - Test Plots

2.1 11B_L@Ant 1

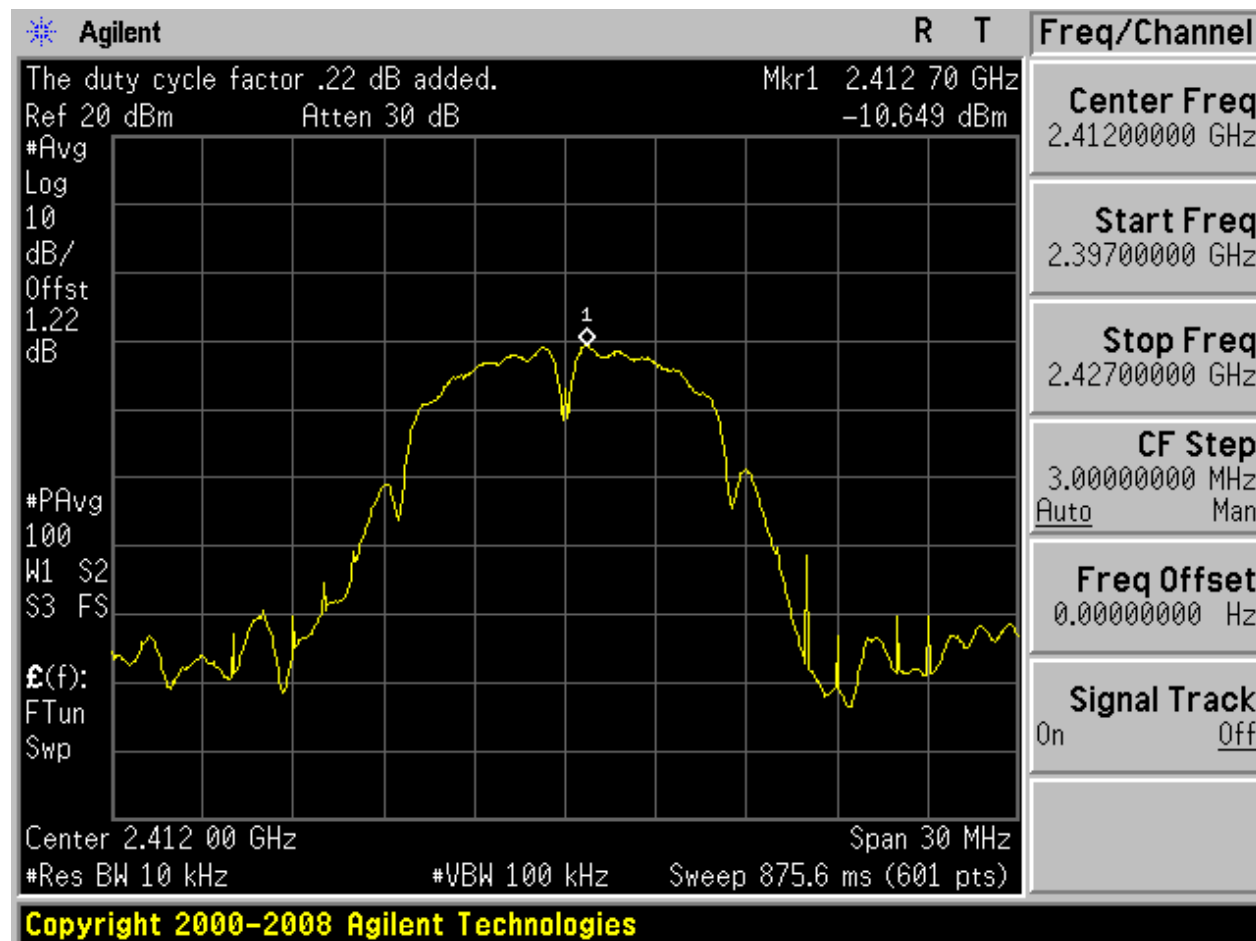




2.2 11B_L@Ant 2

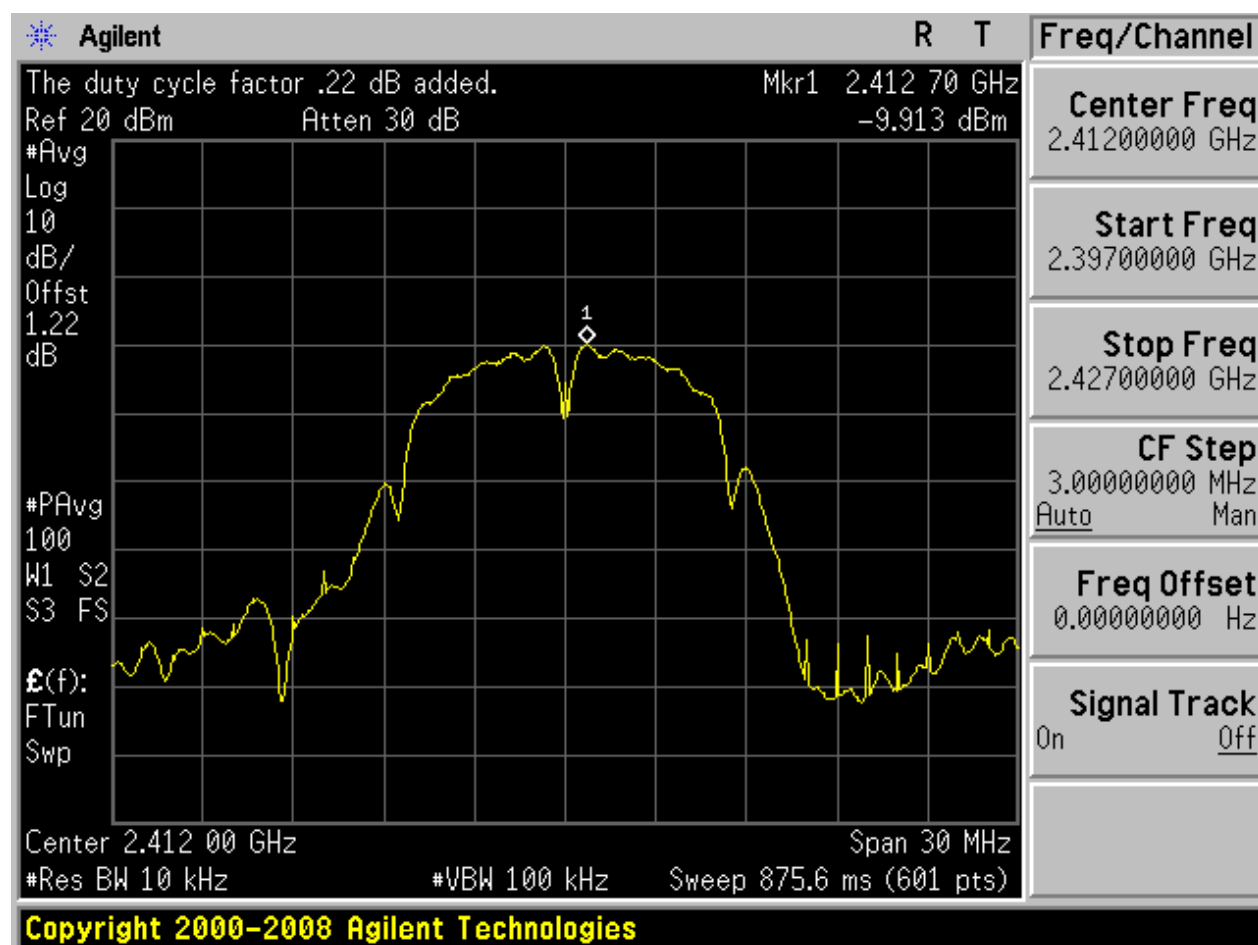




2.3 11B_M@Ant 1

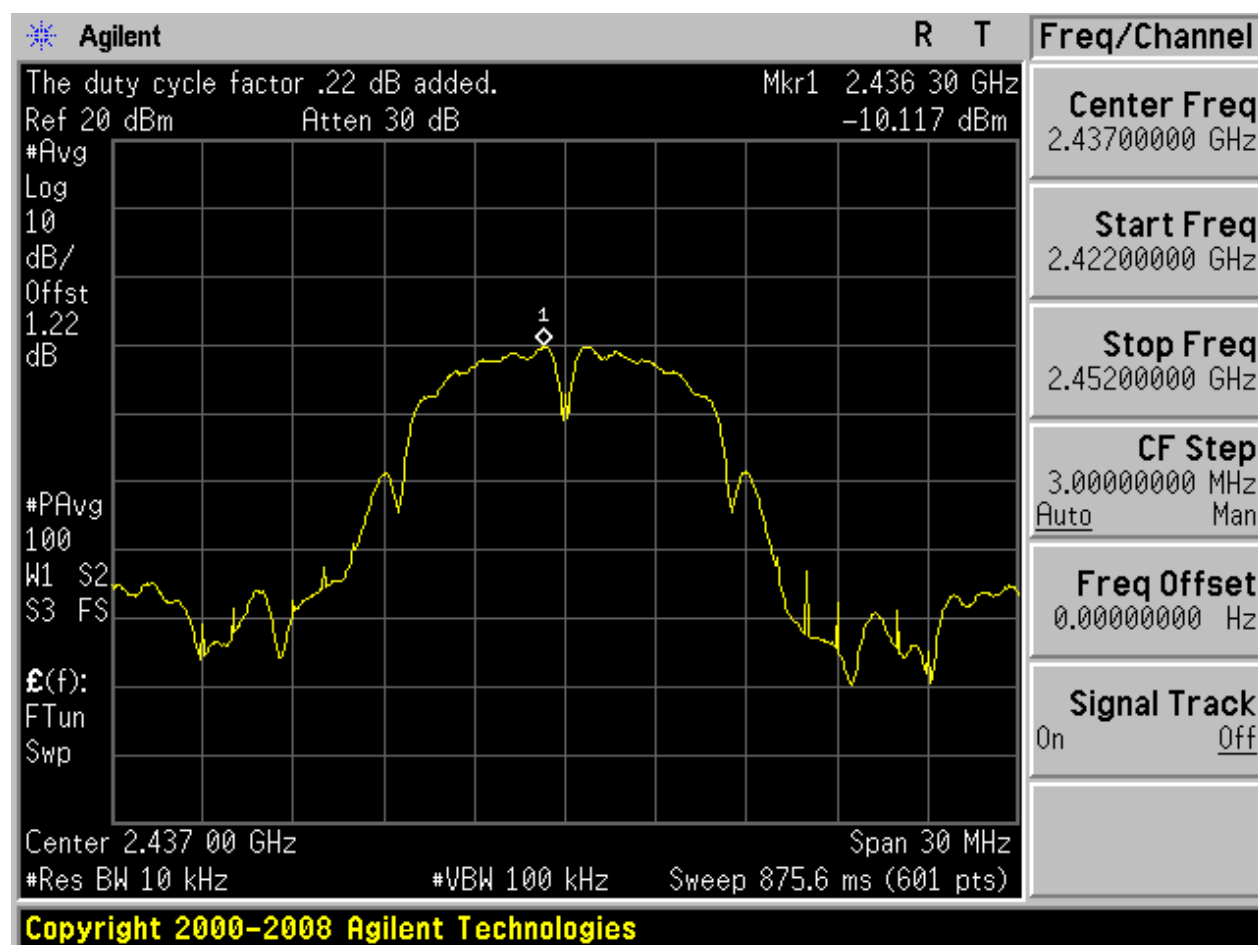




2.4 11B_M@Ant 2

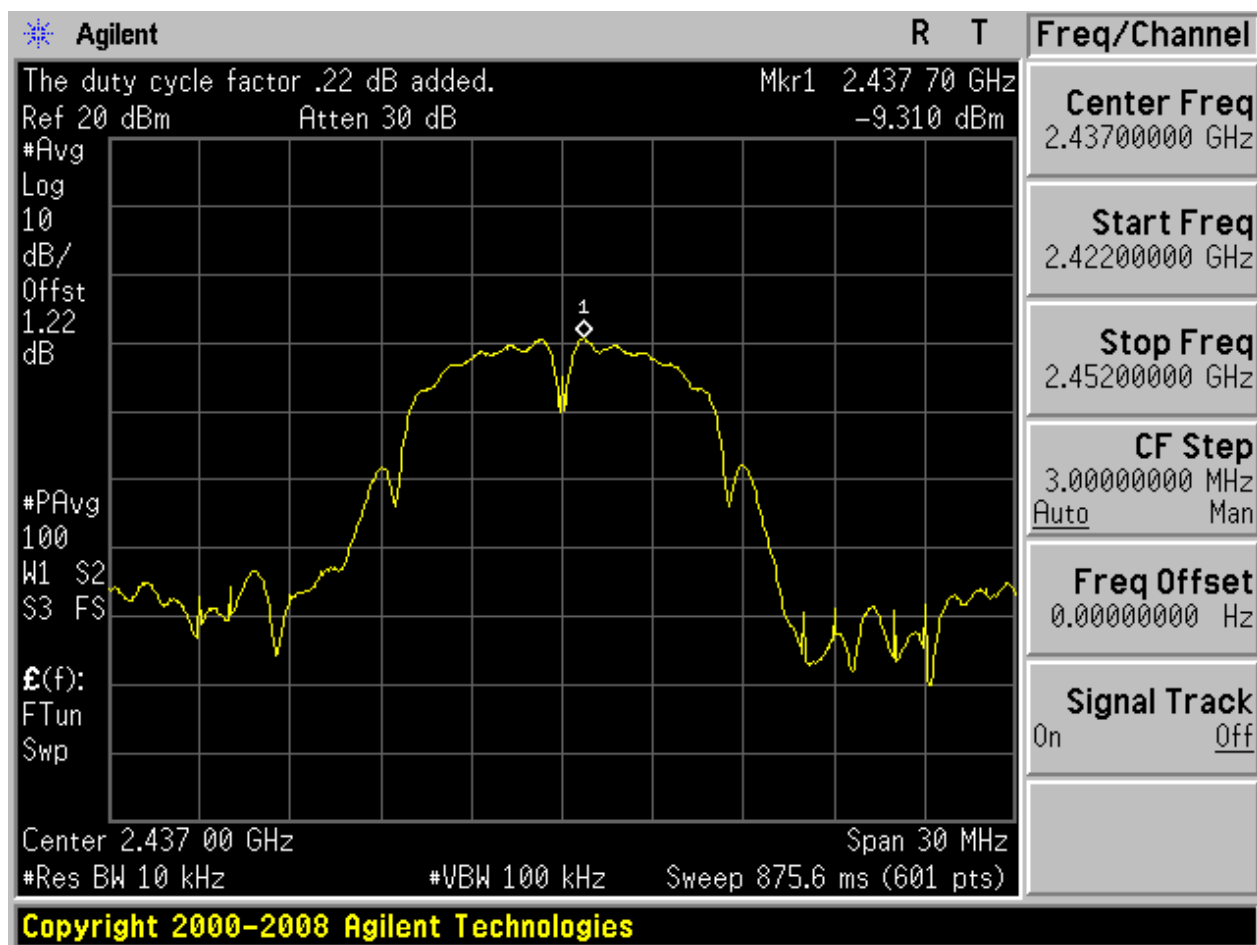




2.5 11B_H@Ant 1

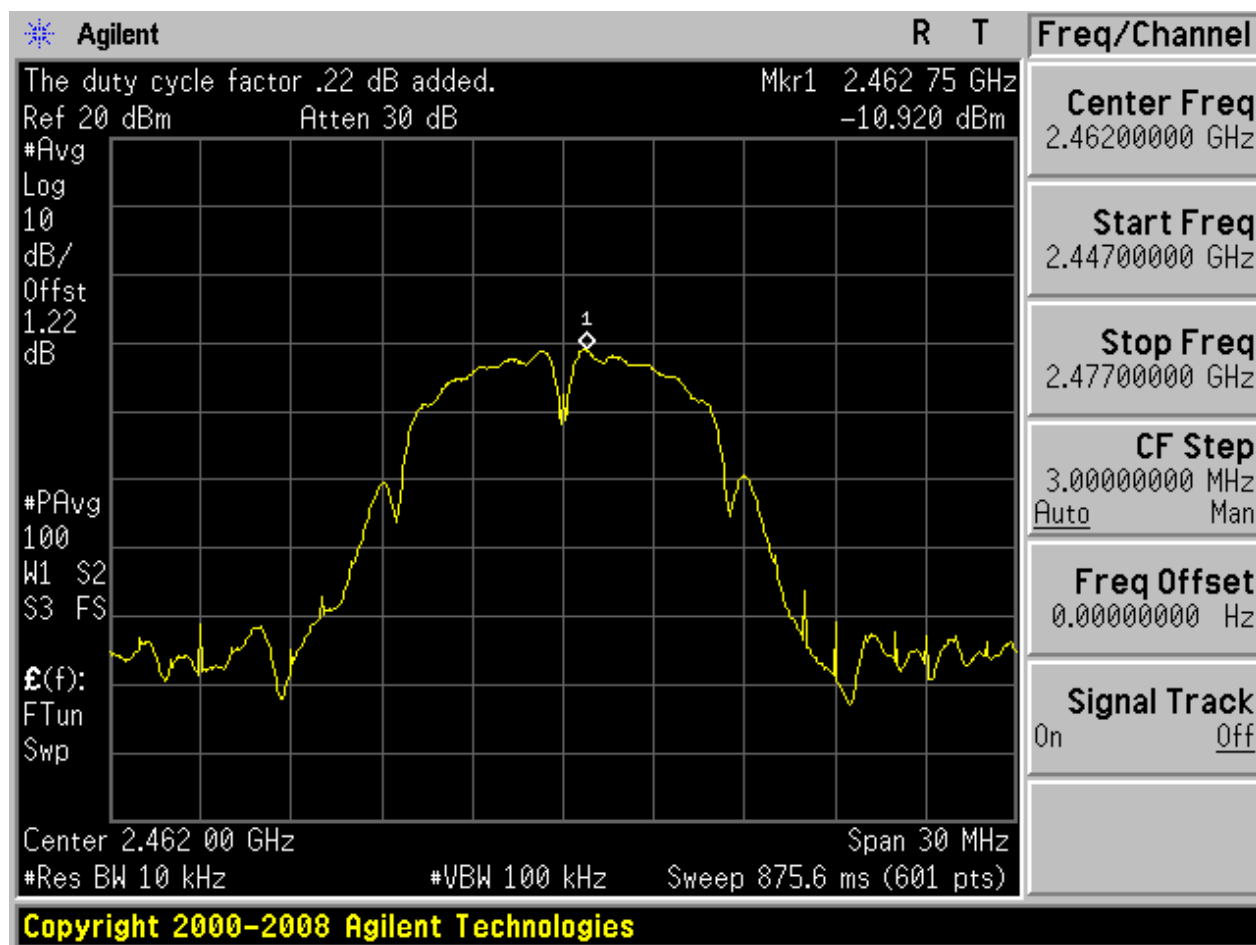




2.6 11B_H@Ant 2

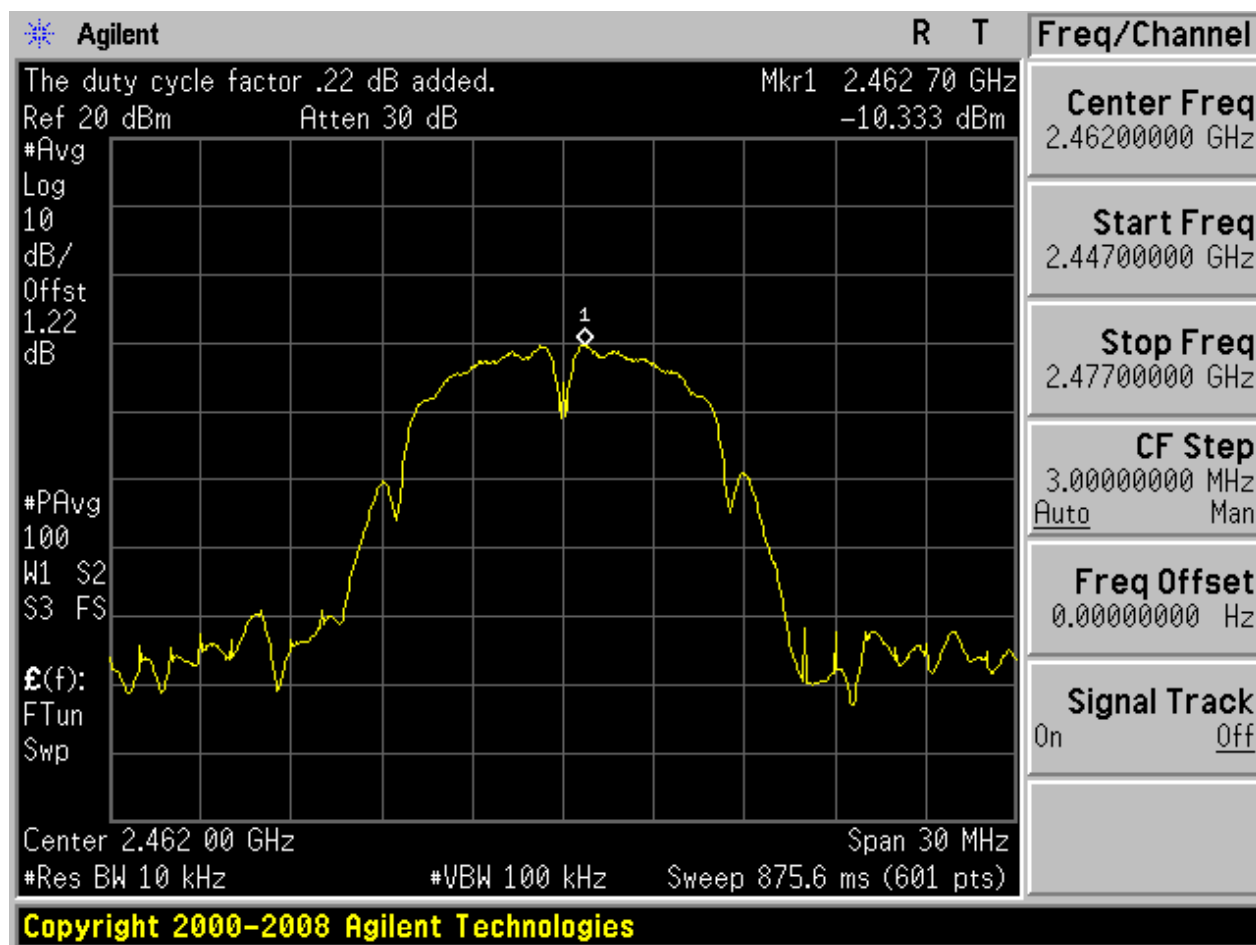


2.7 11G_L@Ant 1

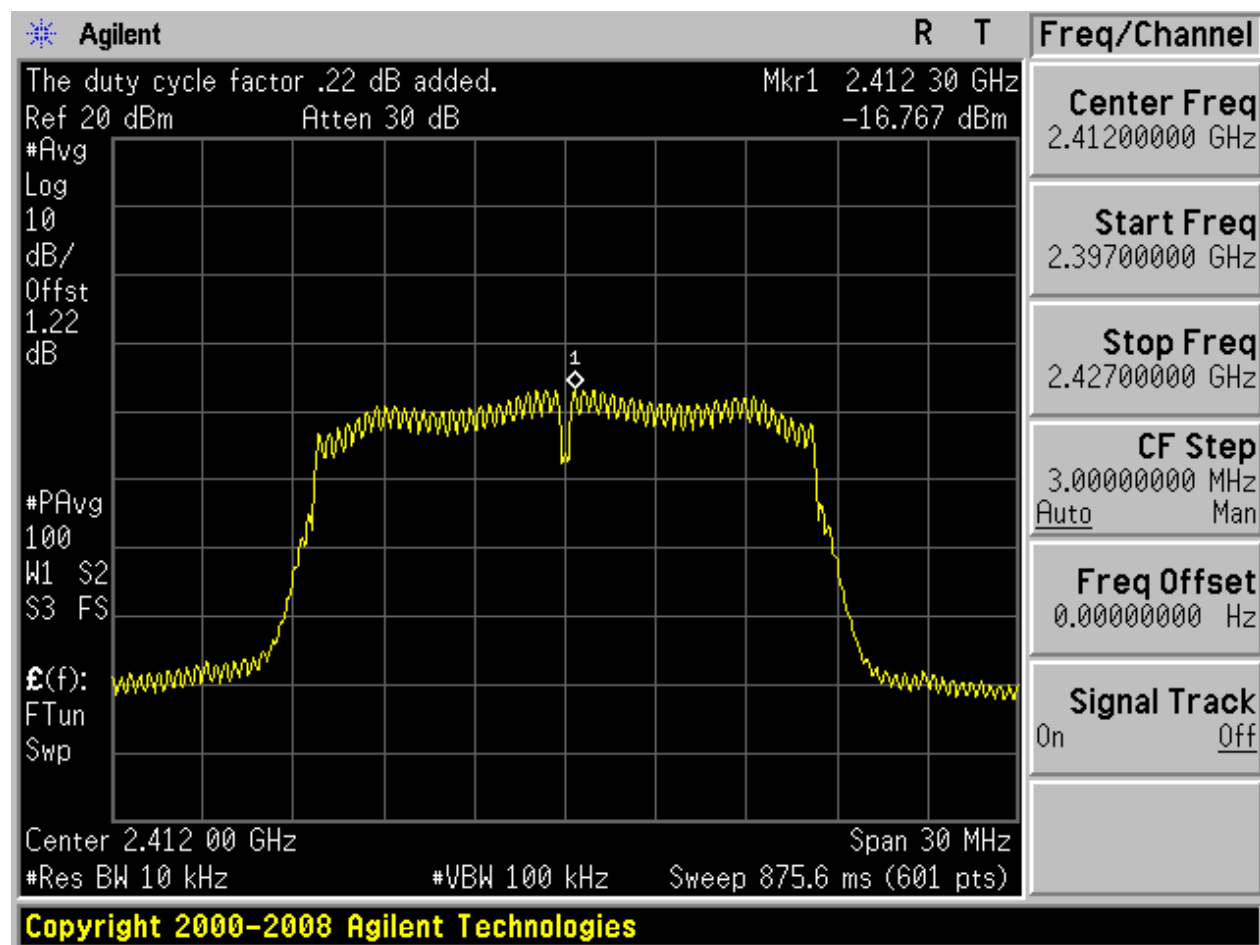




2.8 11G_L@Ant 2

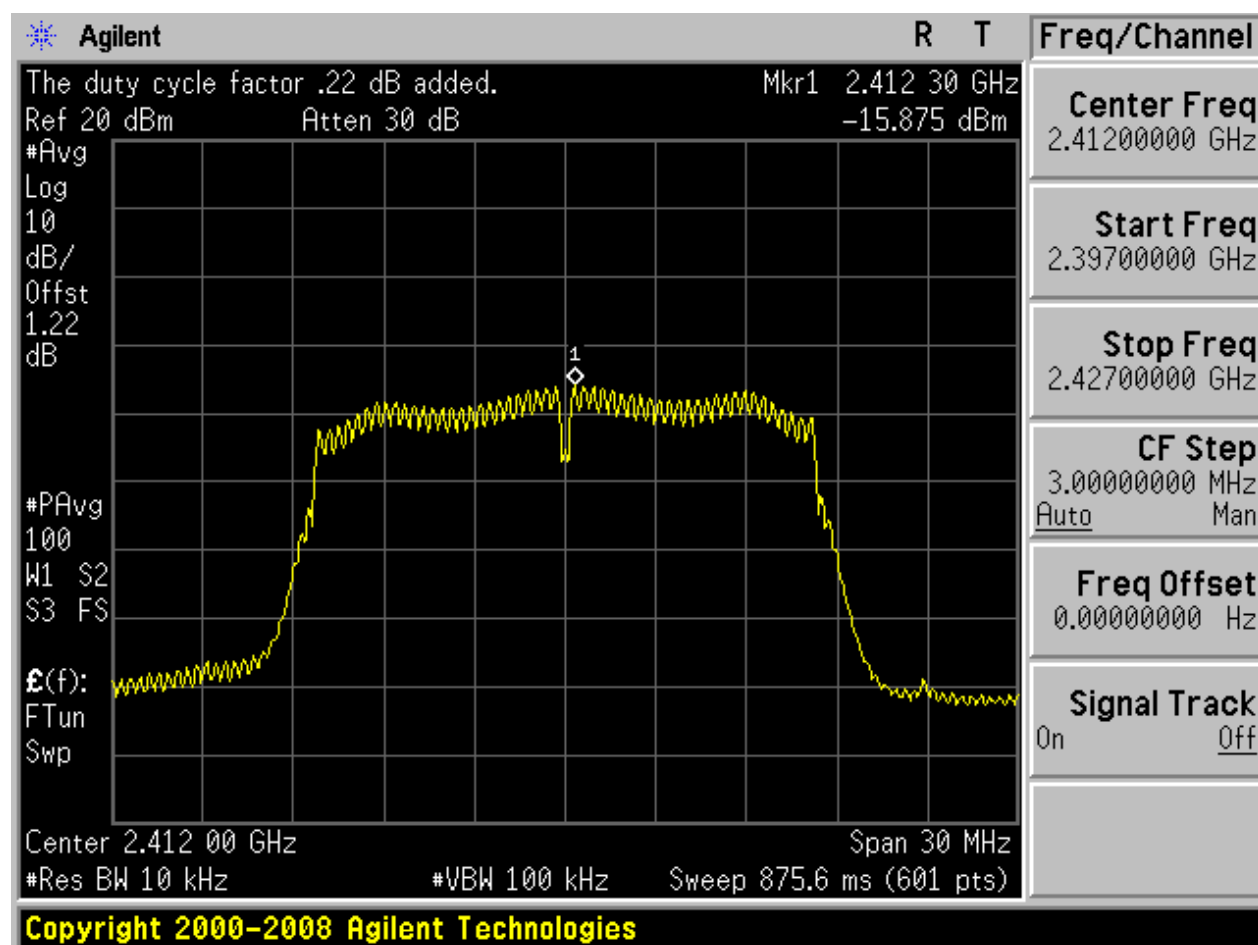


2.9 11G_M@Ant 1

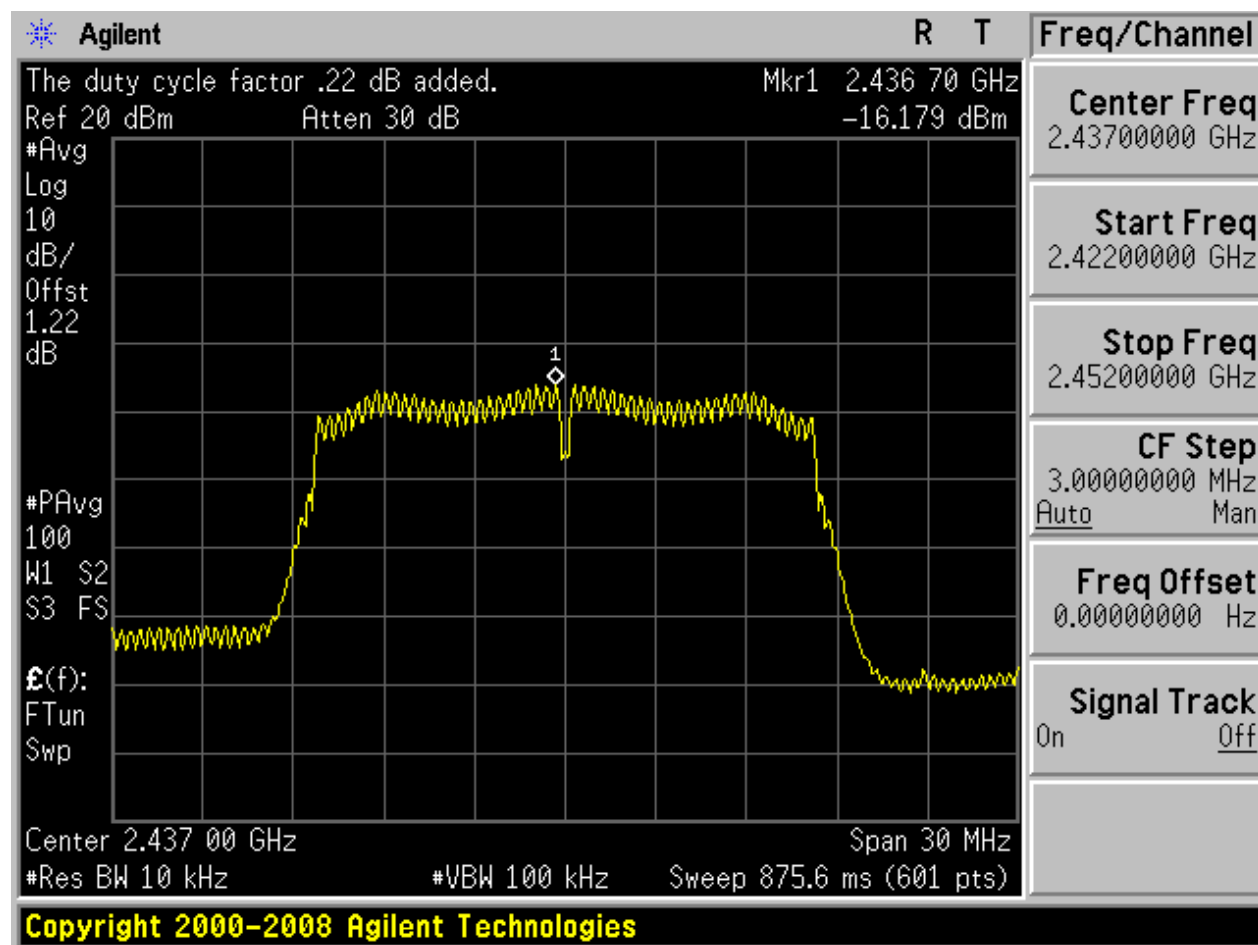




2.10 11G_M@Ant 2

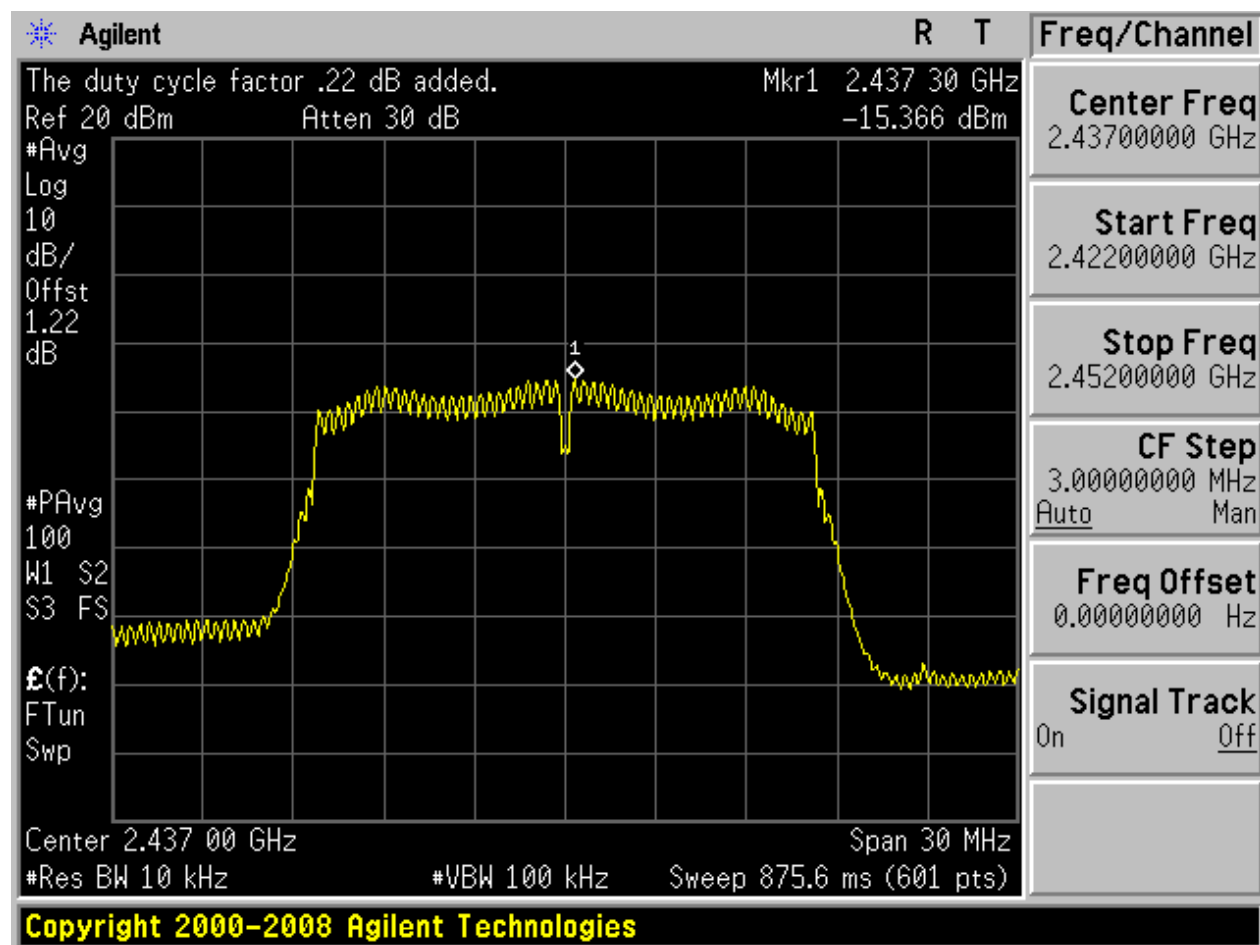




2.11 11G_H@Ant 1

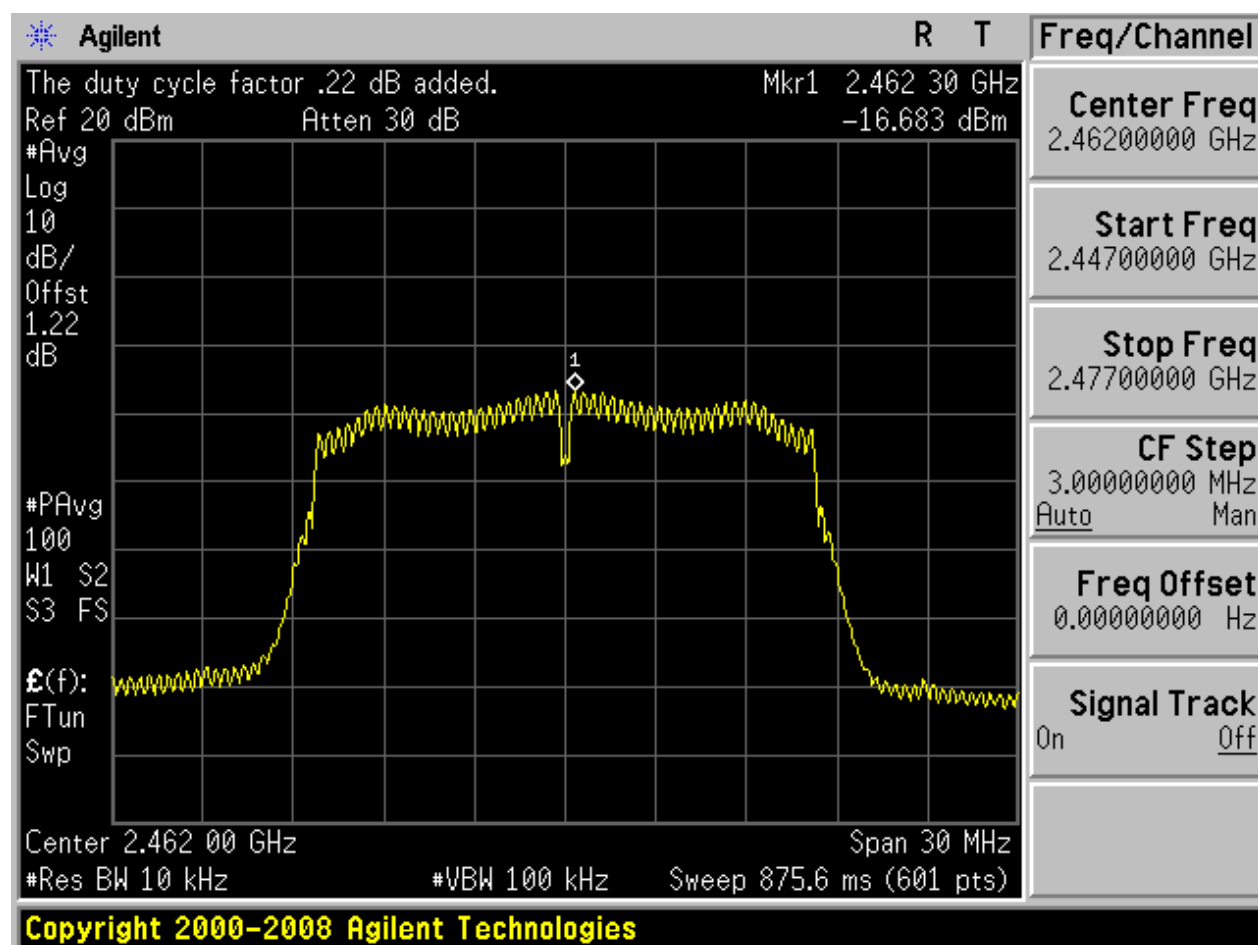


2.12 11G_H@Ant 2

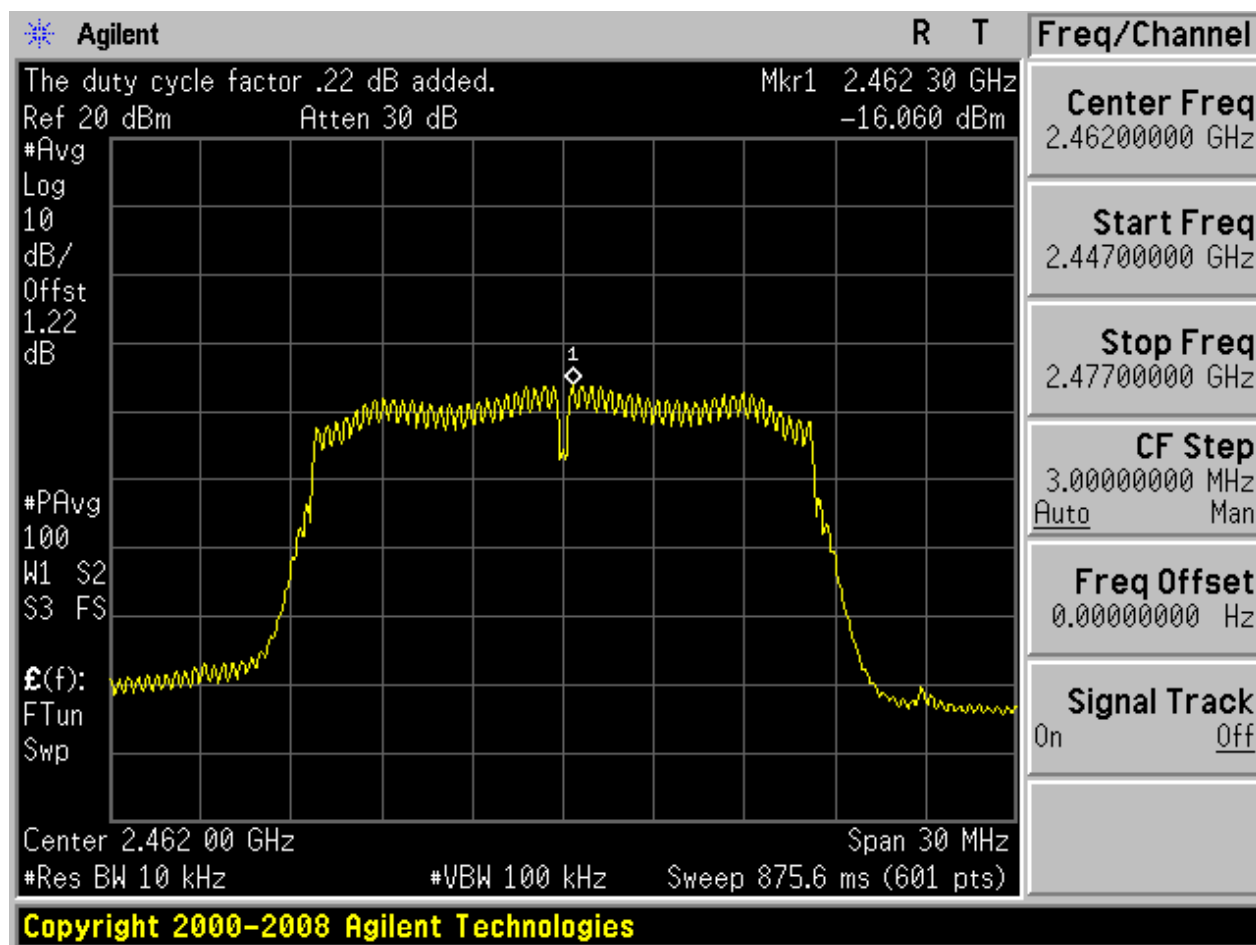




2.13 11N20_L@Ant 1

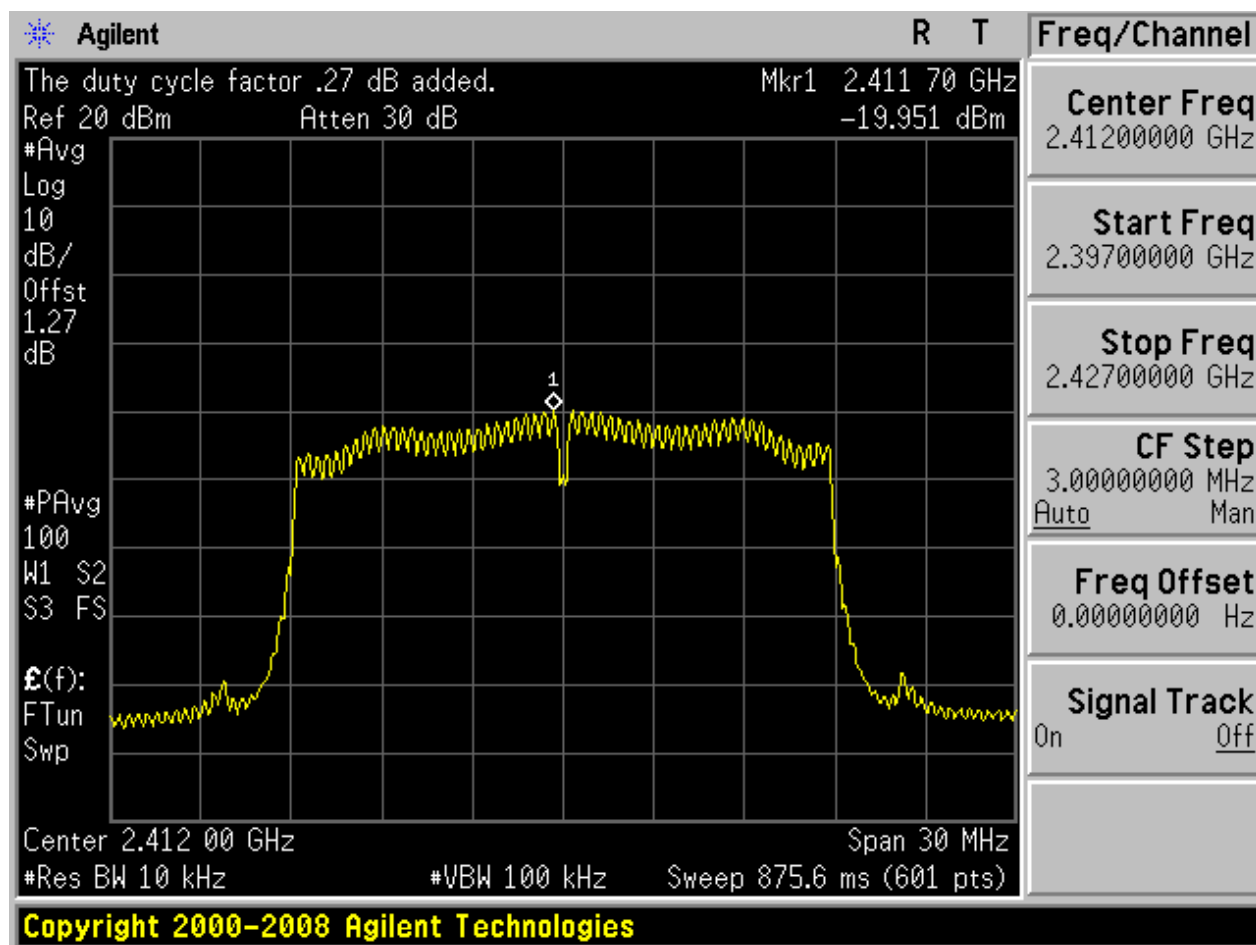




2.14 11N20_L@Ant 2

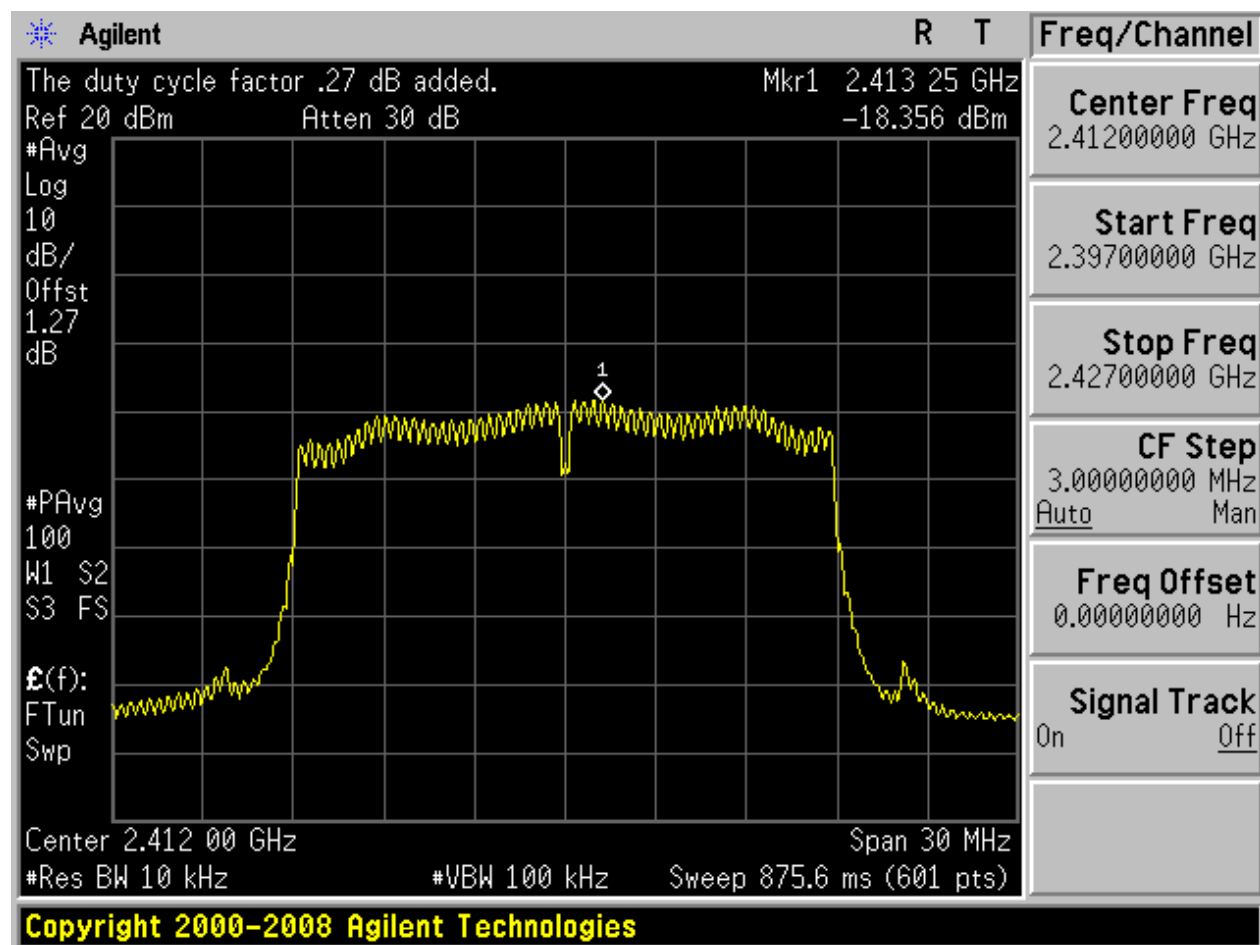


2.15 11N20_M@Ant 1

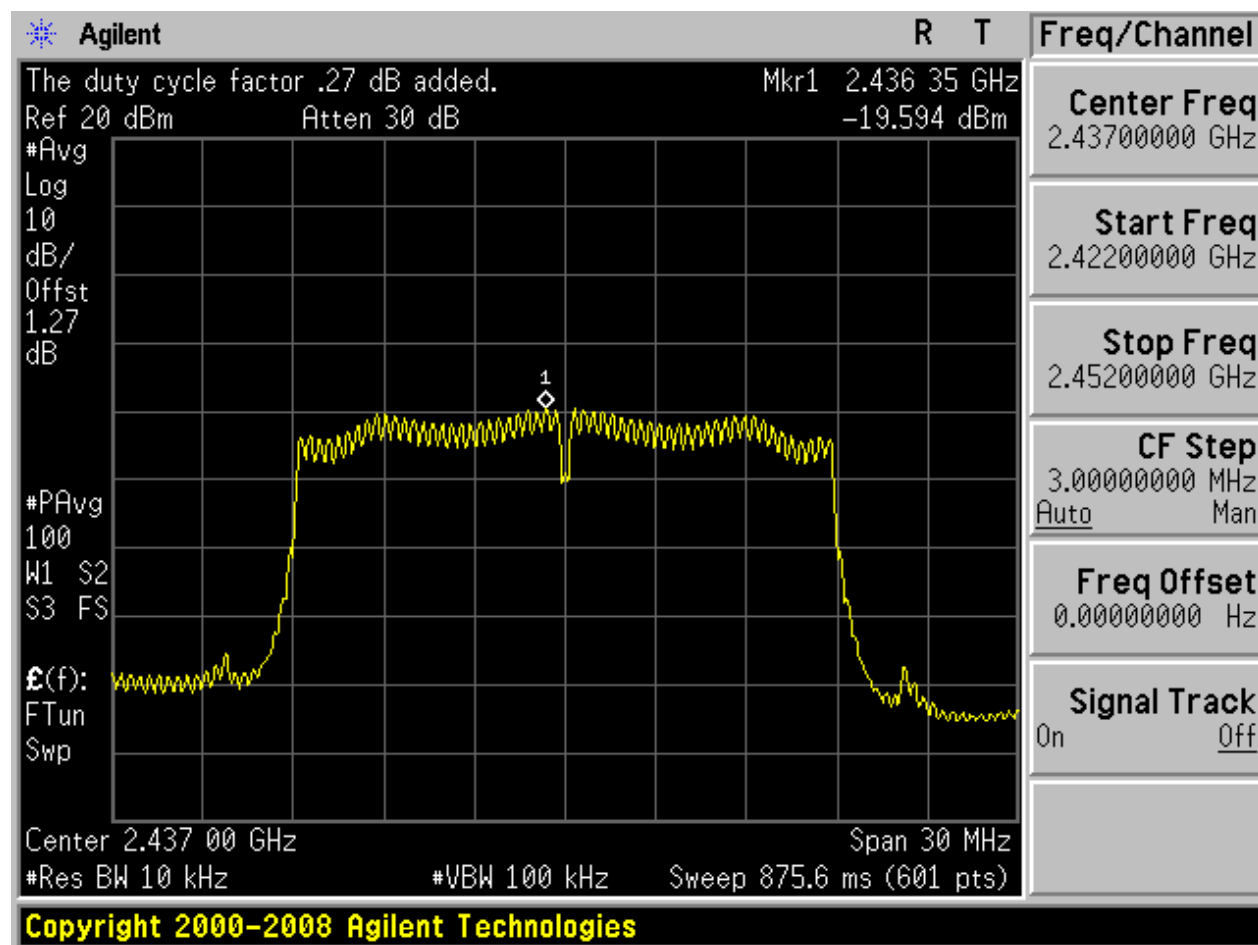




2.16 11N20_M@Ant 2

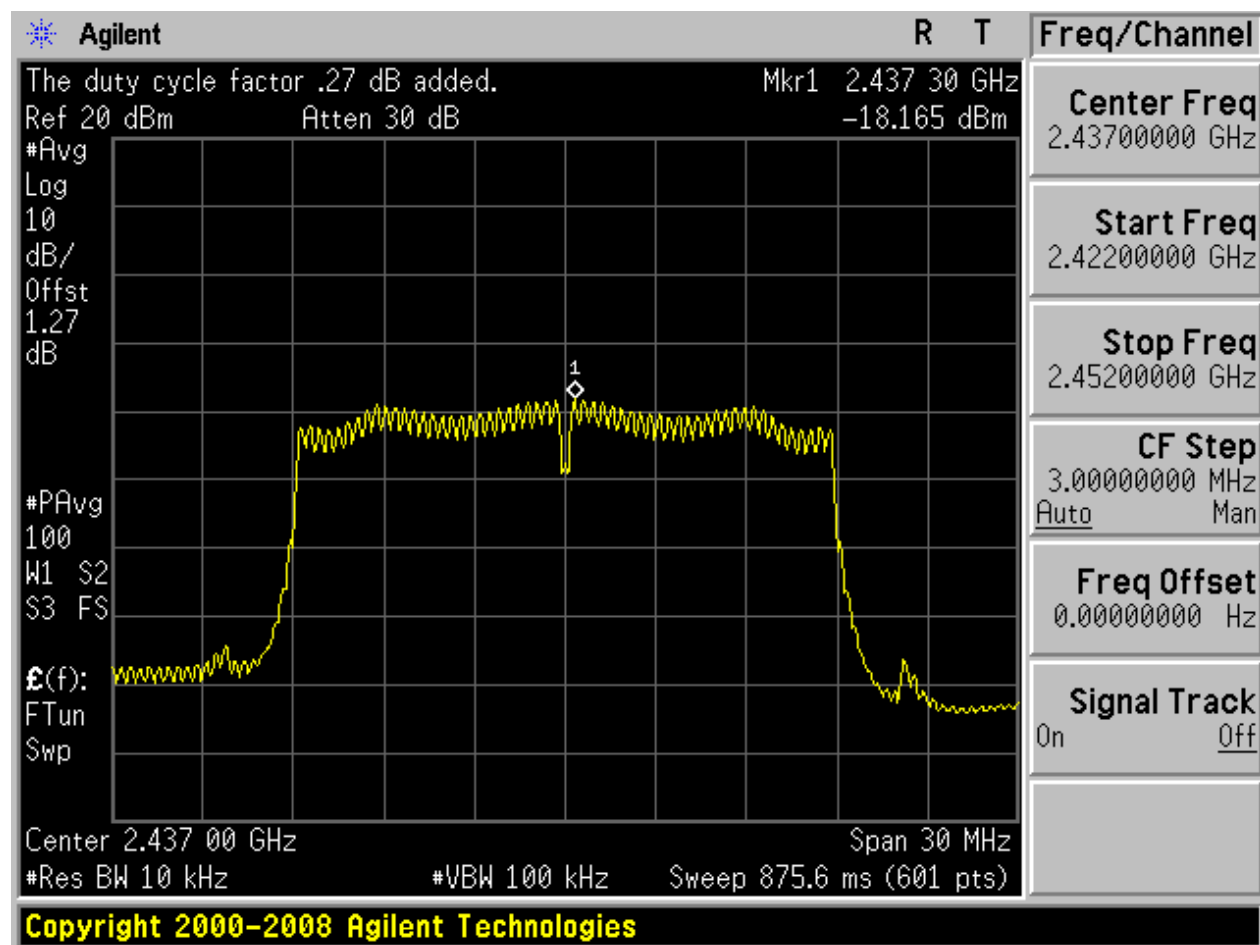




2.17 11N20_H@Ant 1

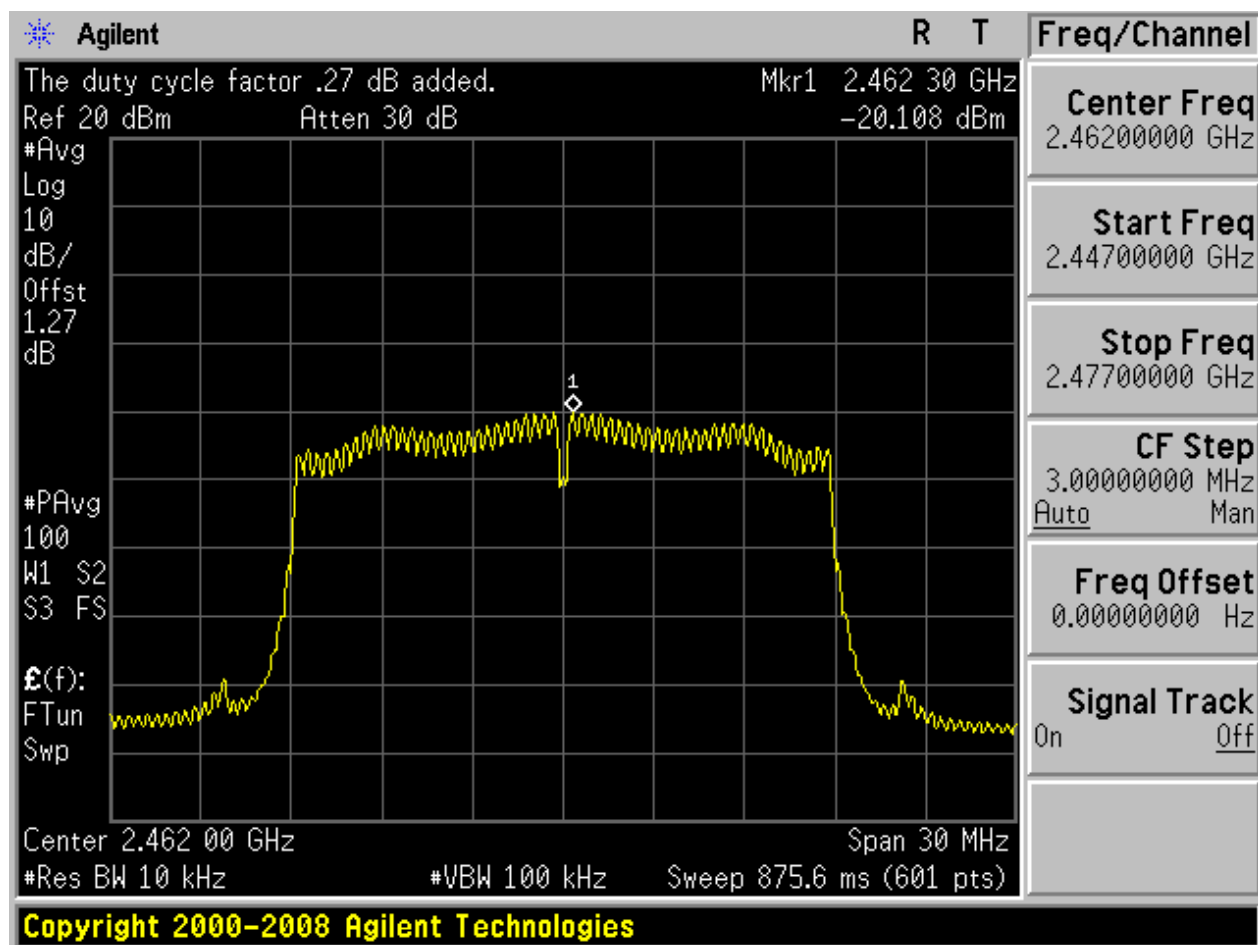





2.18 11N20_H@Ant 2

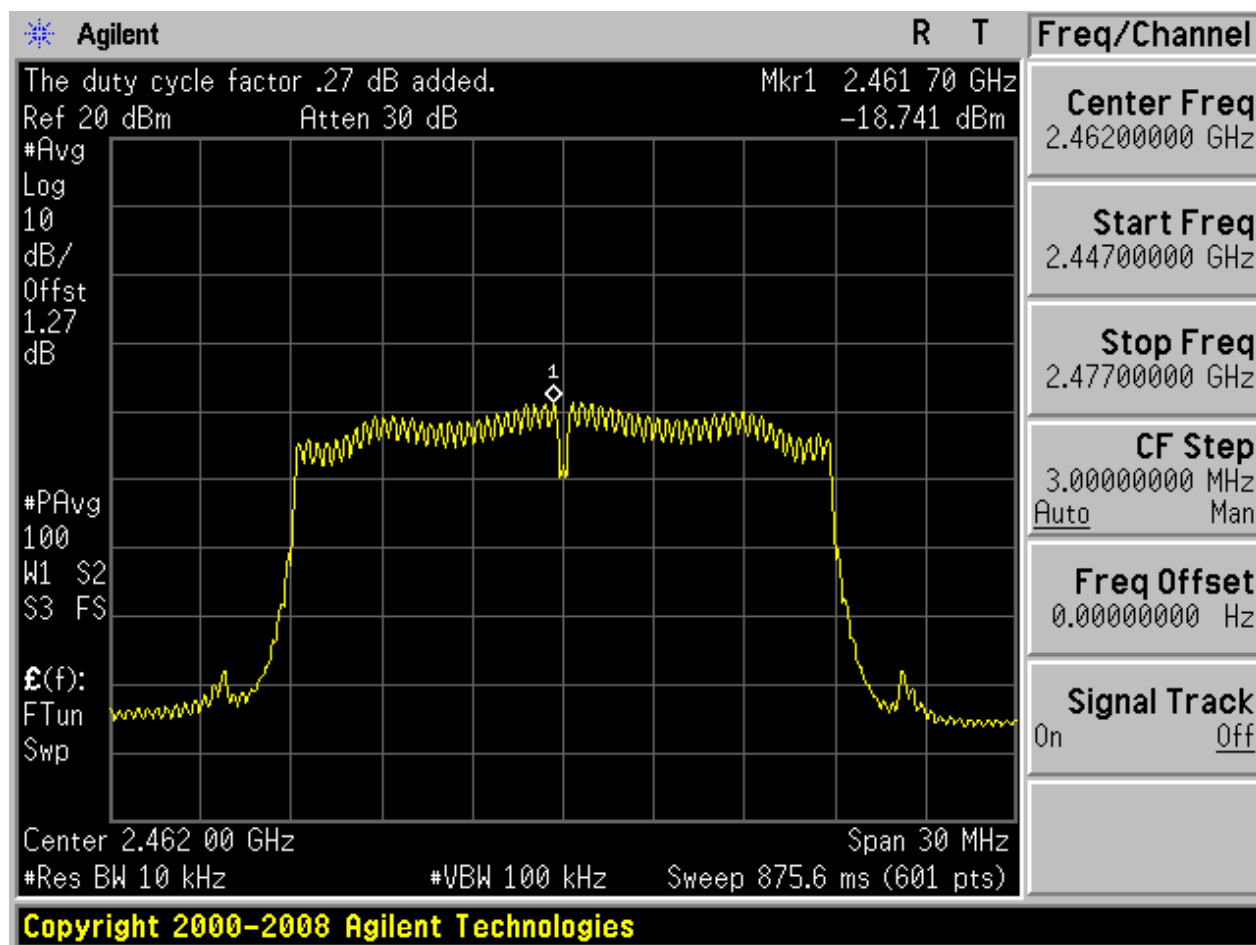

2.13 11N20m_L@Ant 1

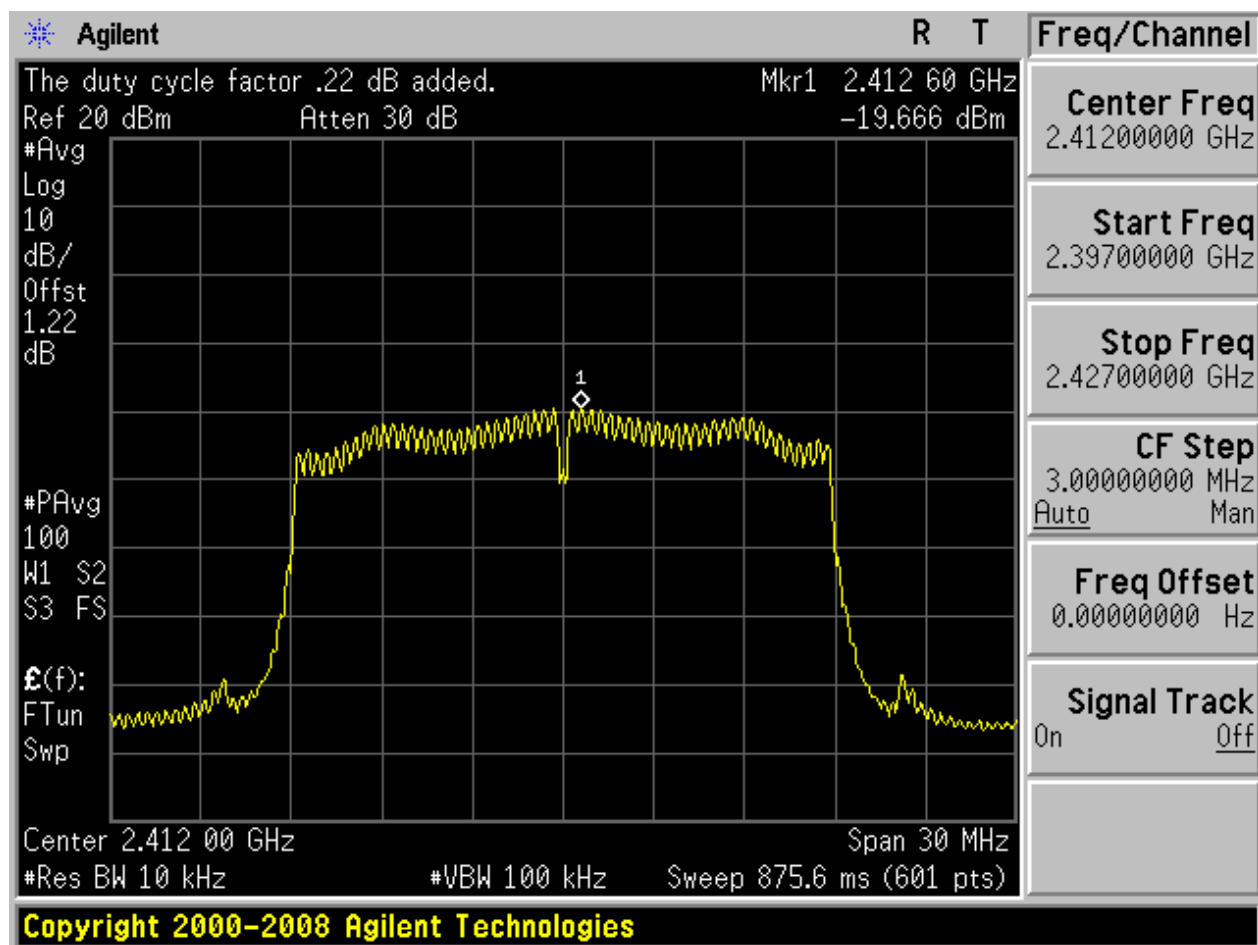


2.14 11N20m_L@Ant 2

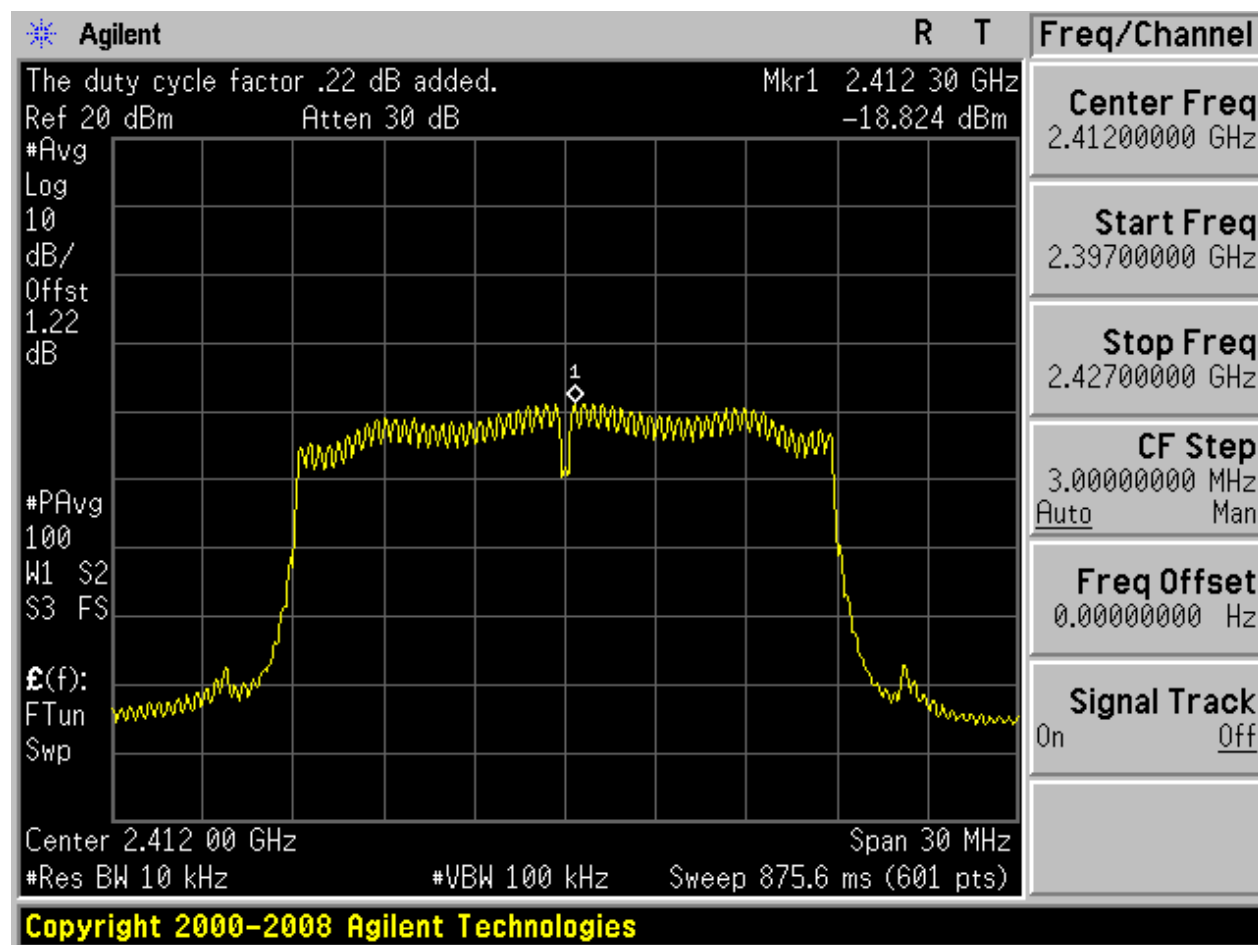




2.15 11N20m_M@Ant 1

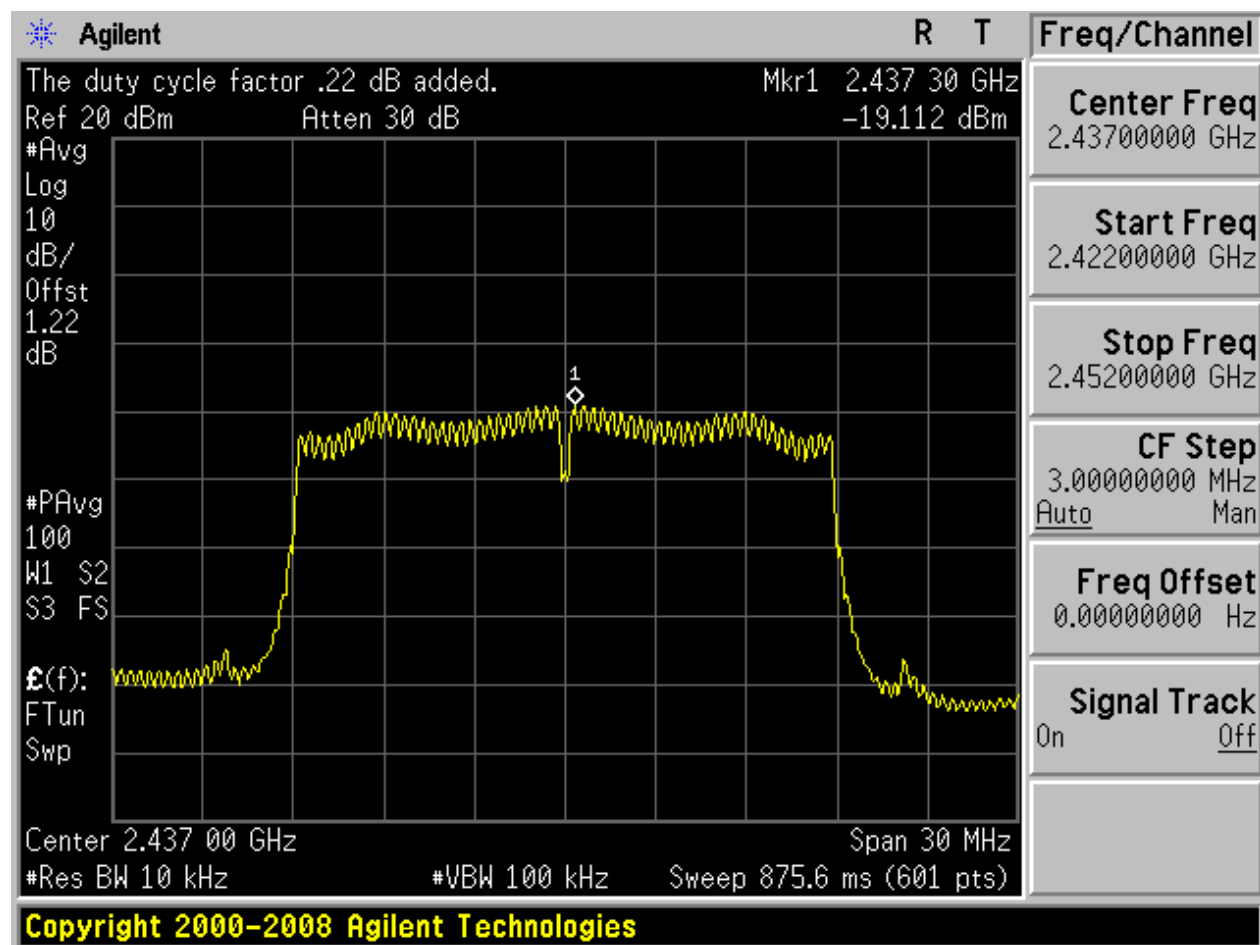




2.16 11N20m_M@Ant 2

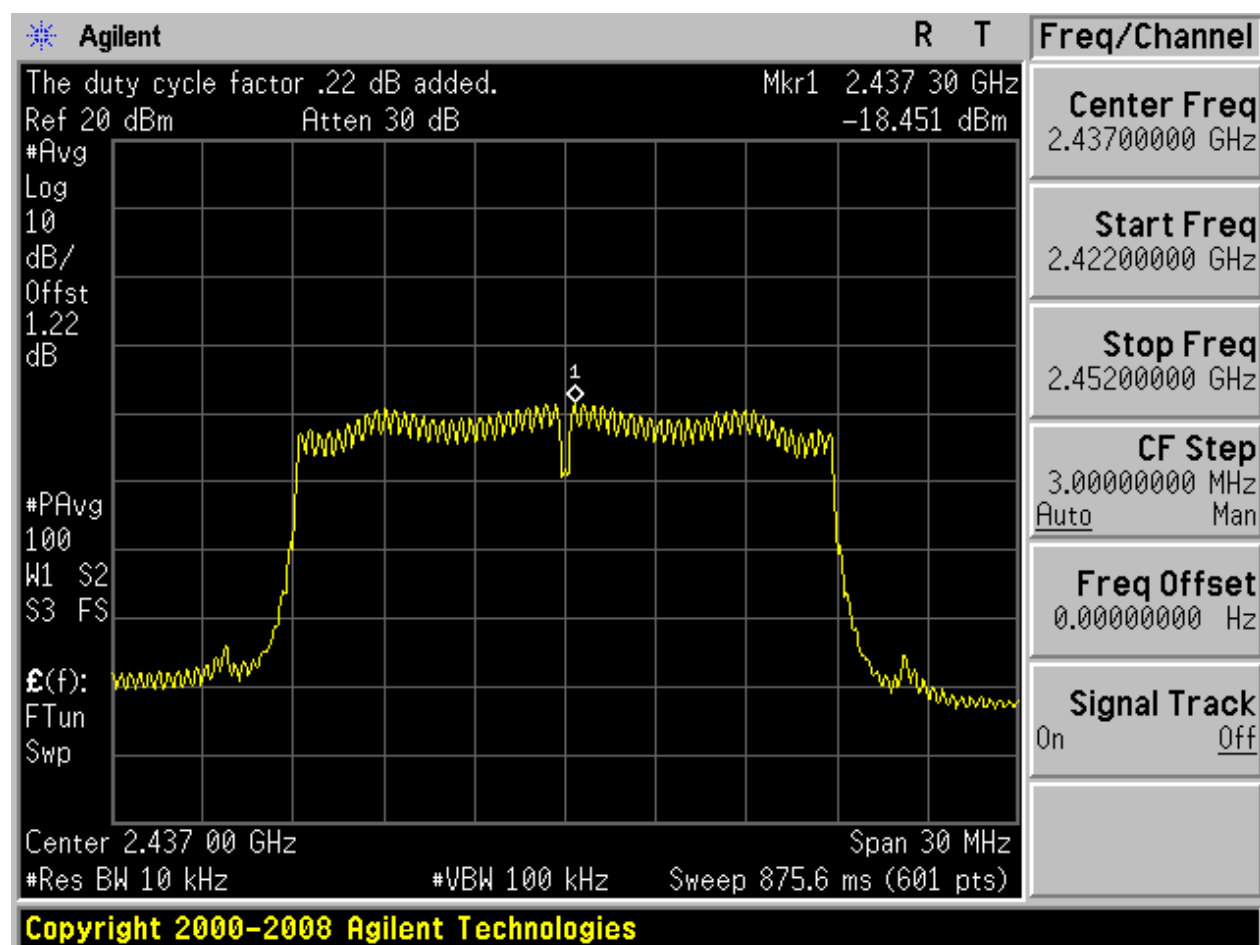


2.17 11N20m_H@Ant 1

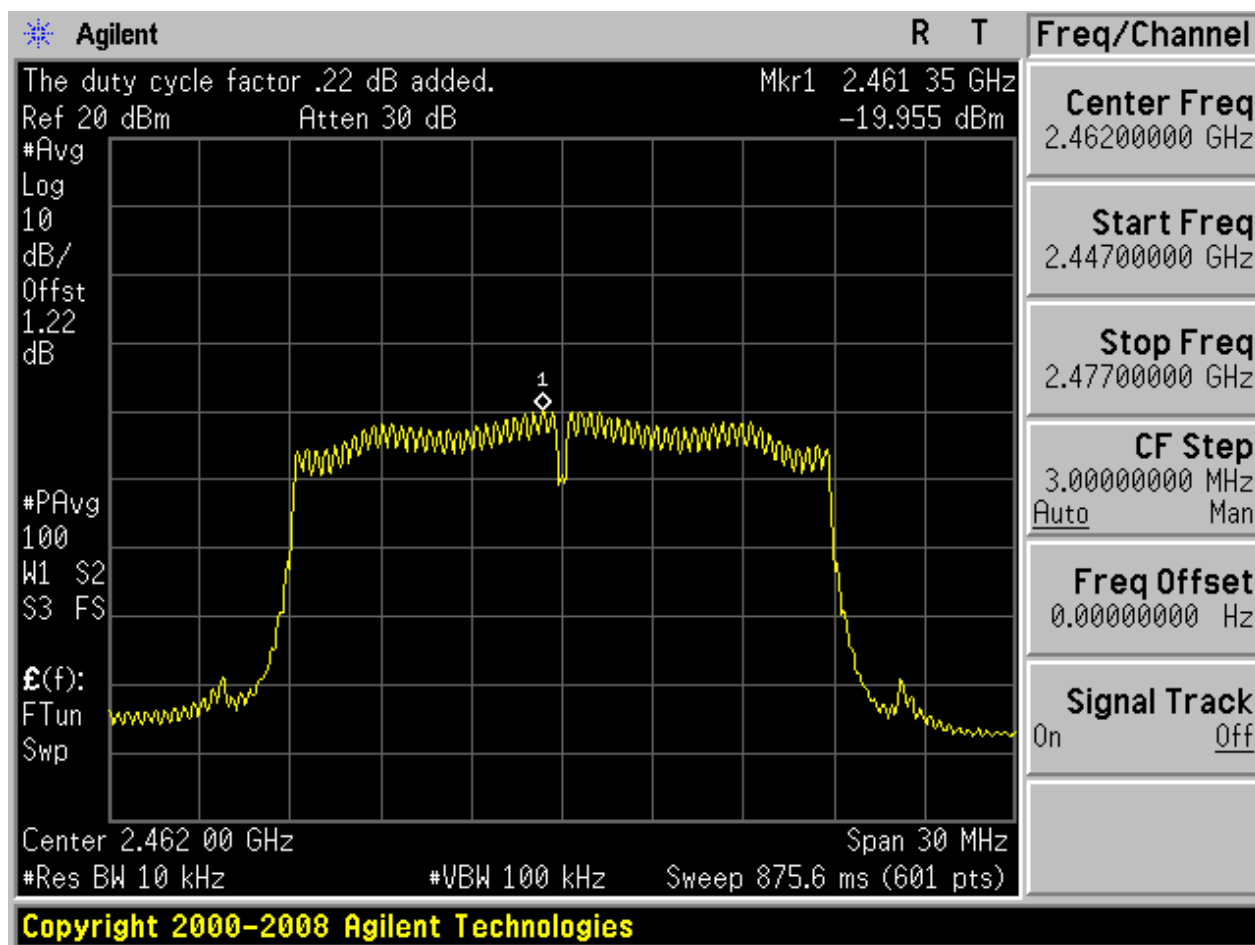




2.18 11N20m_H@Ant 2

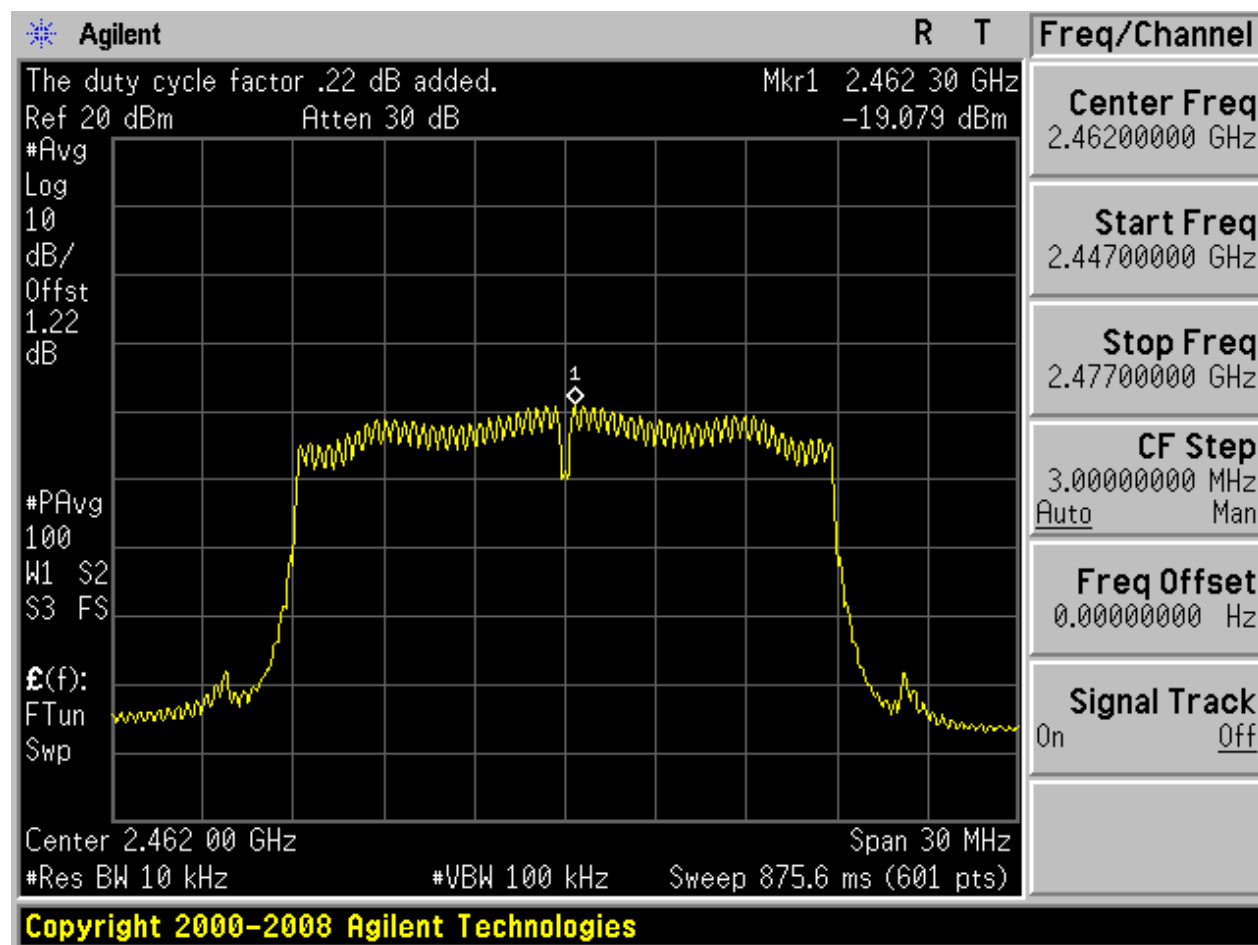




2.19 11N40_L@Ant 1

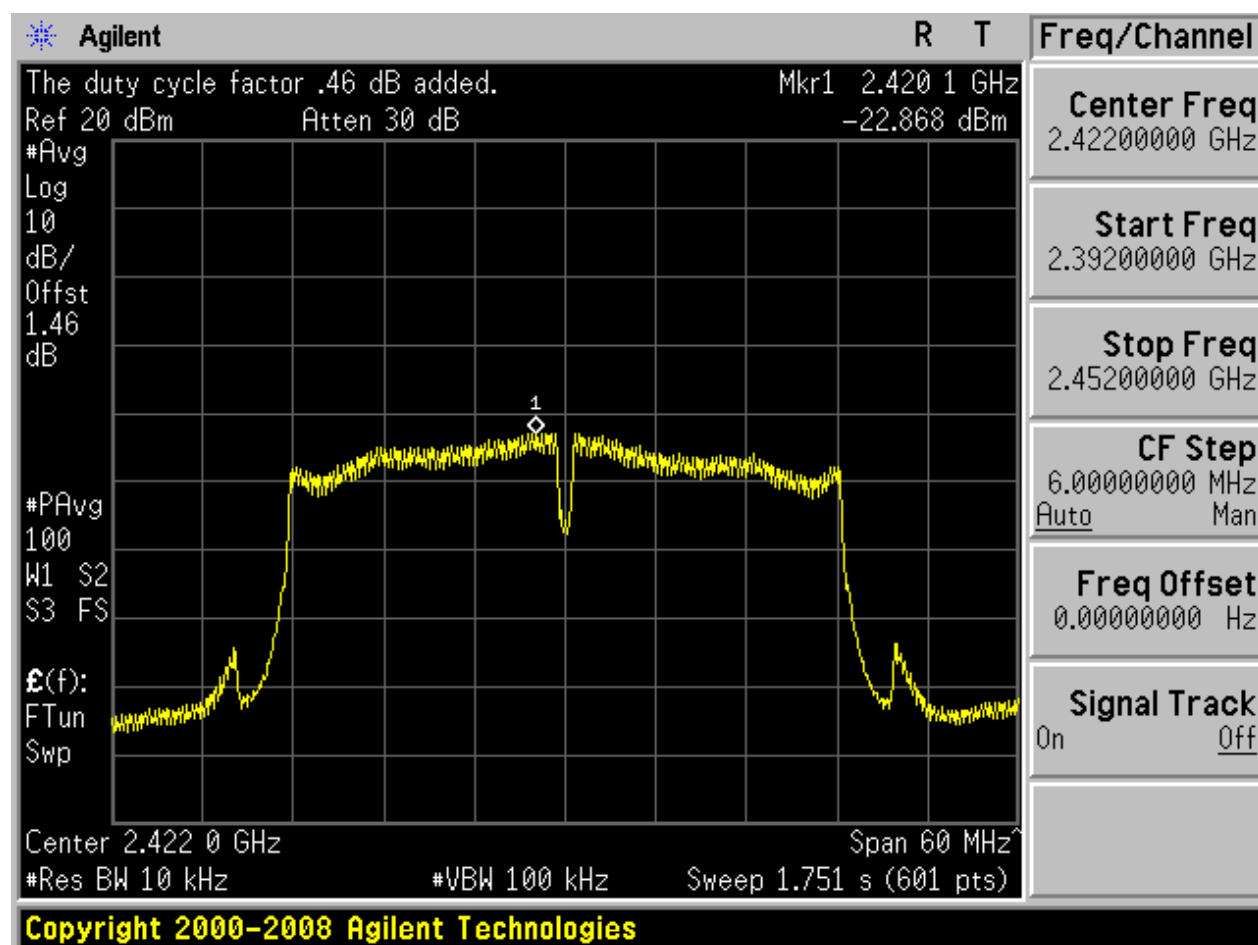




2.20 11N40_L@Ant 2

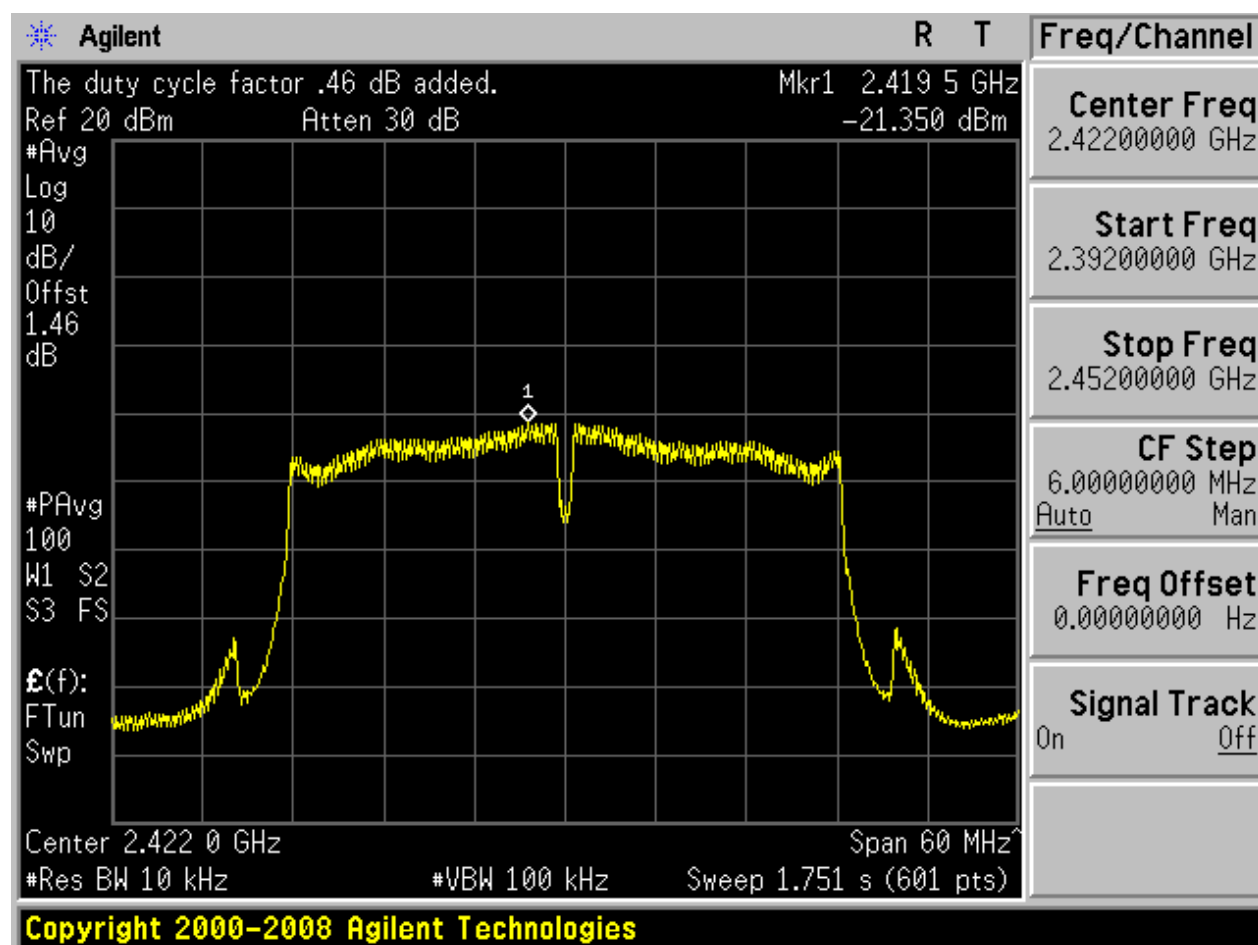




2.21 11N40_M@Ant 1

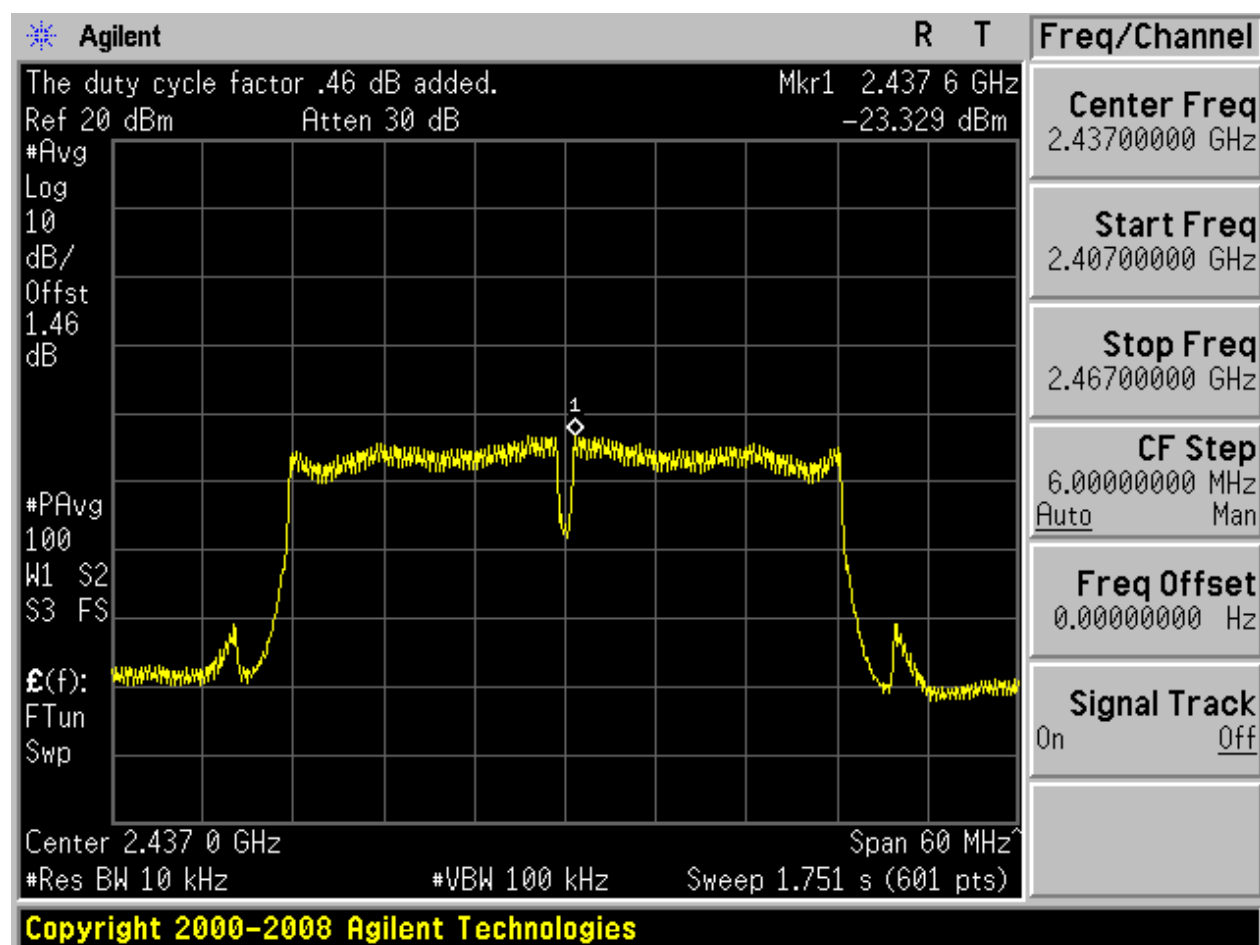




2.22 11N40_M@Ant 2

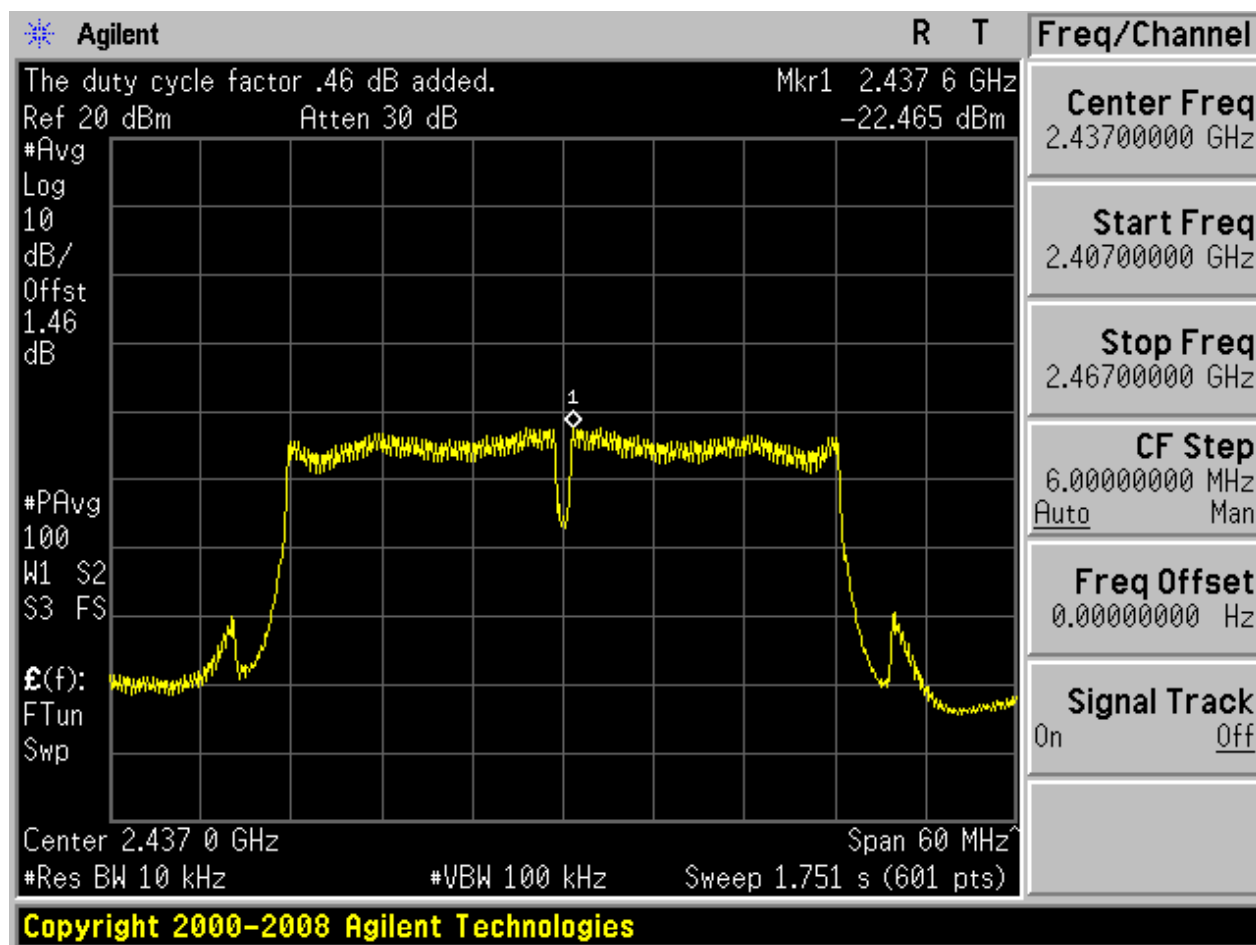


2.23 11N40_H@Ant 1

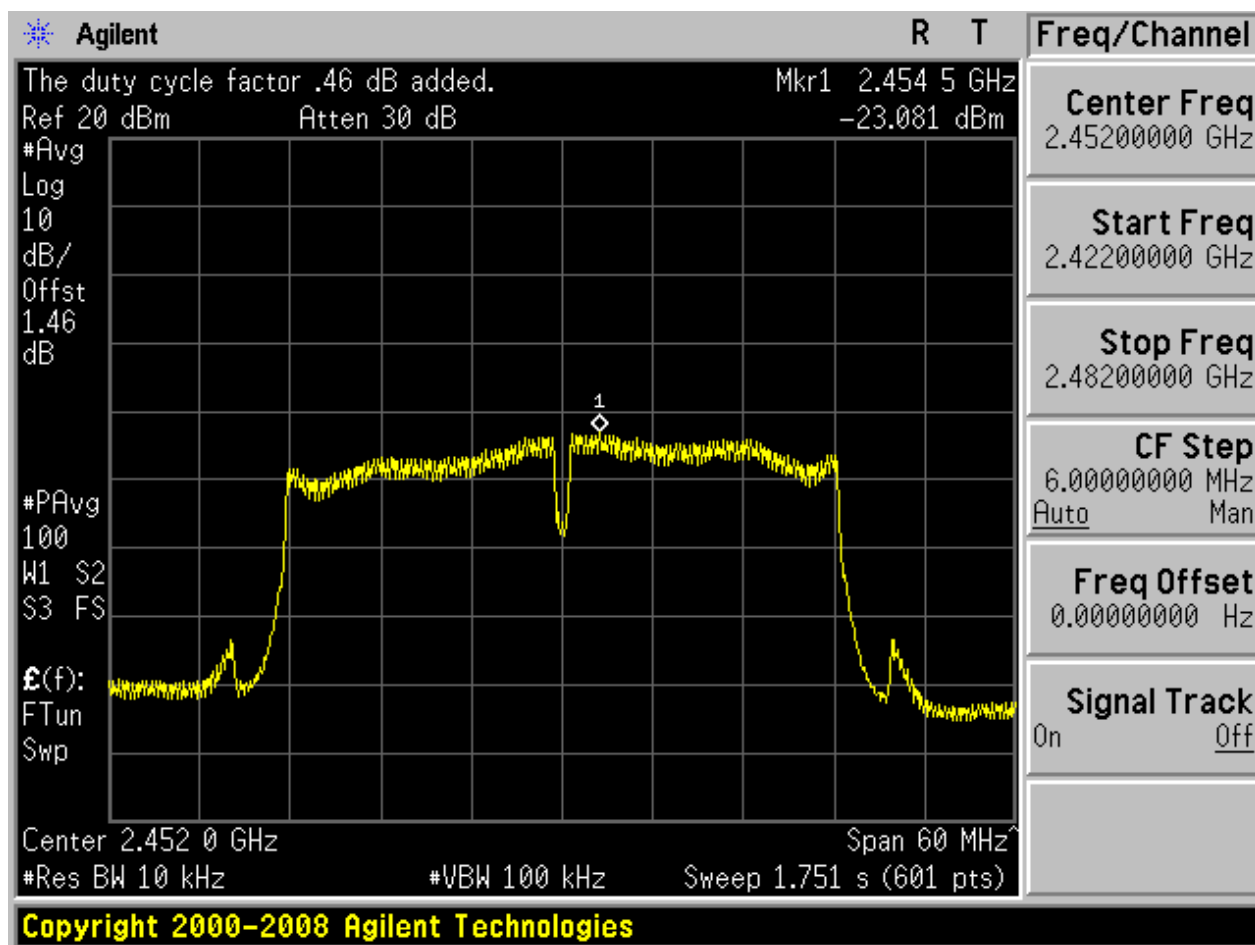




2.24 11N40_H@Ant 2

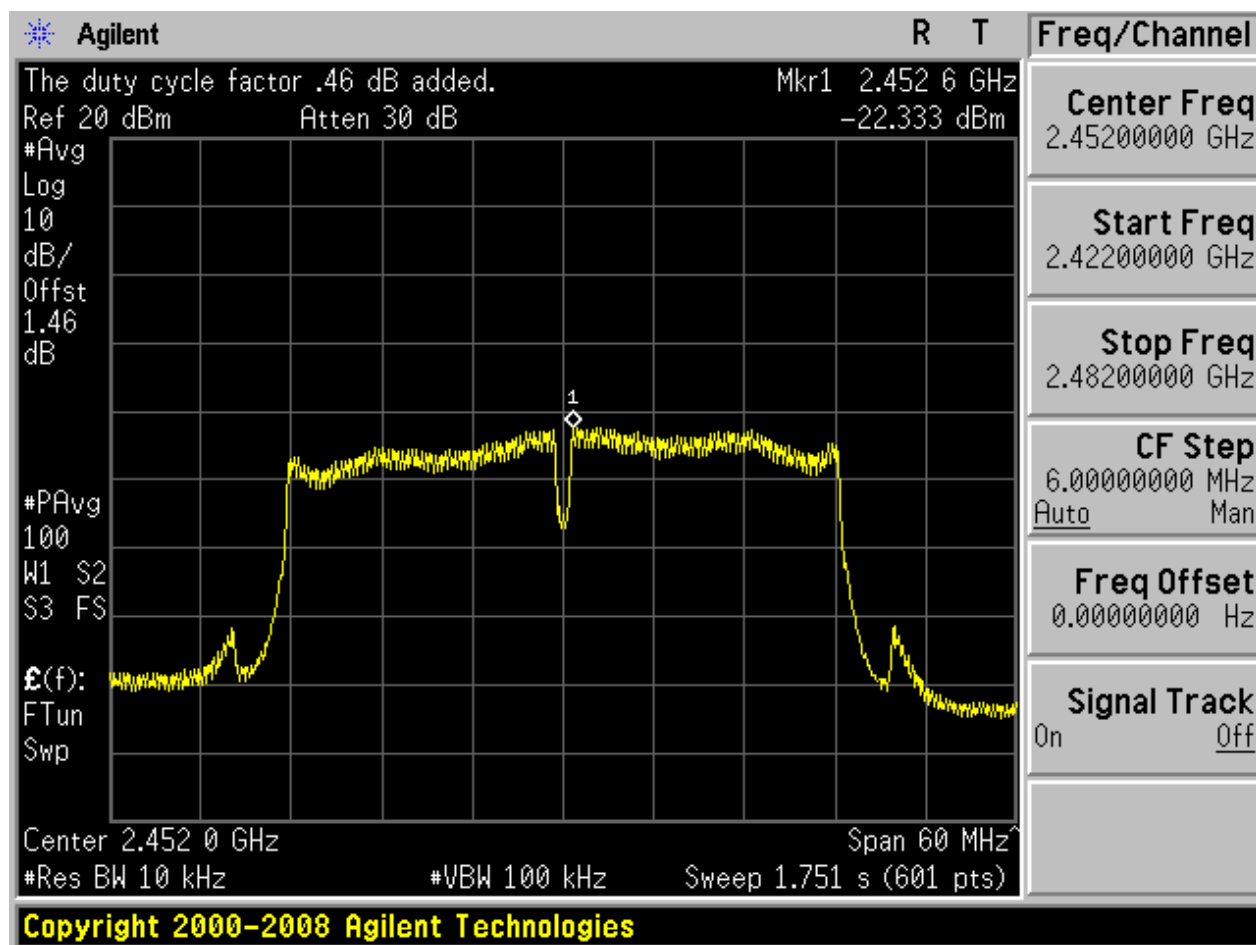




2.31 11N40m_L@Ant 1

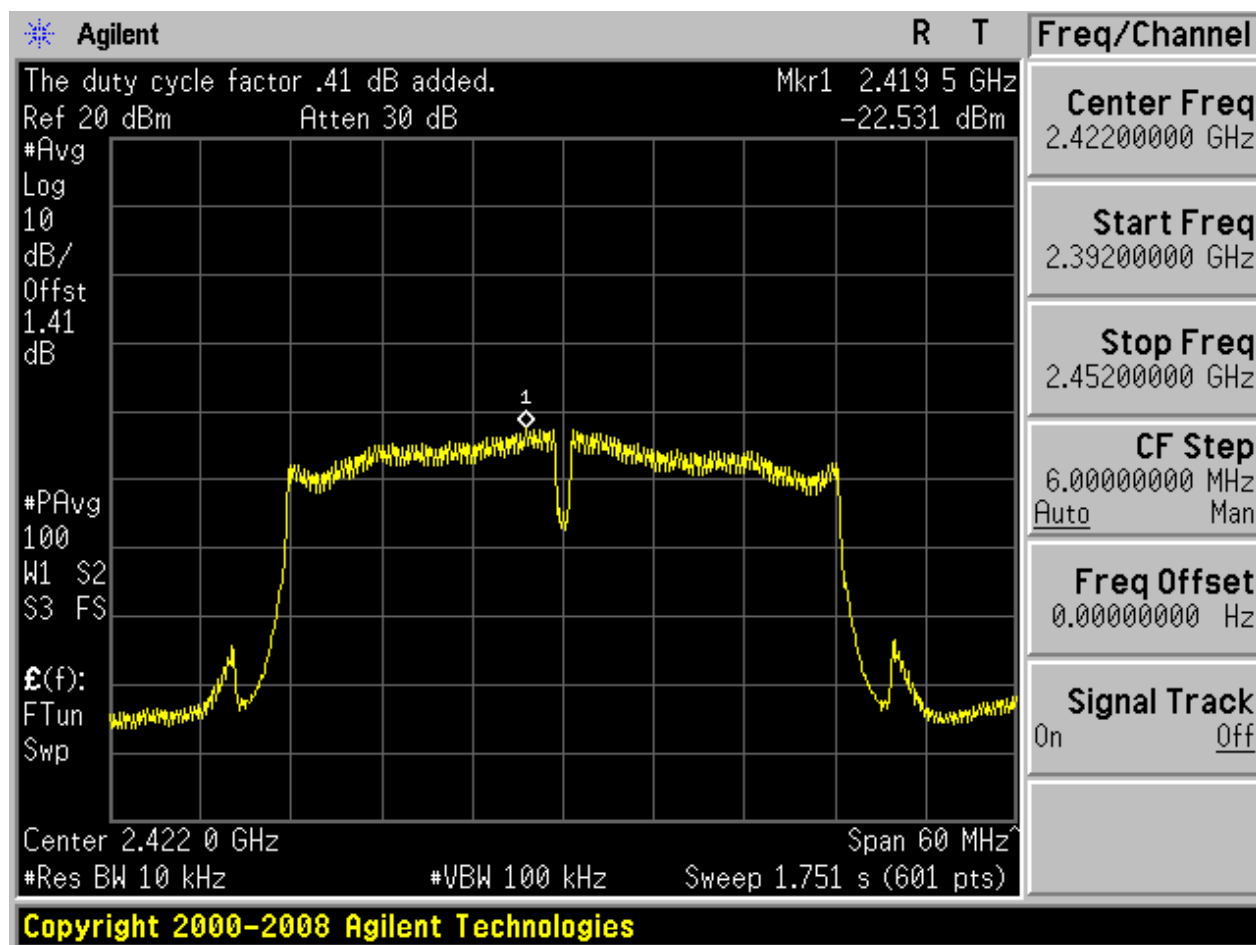




2.32 11N40m_L@Ant 2

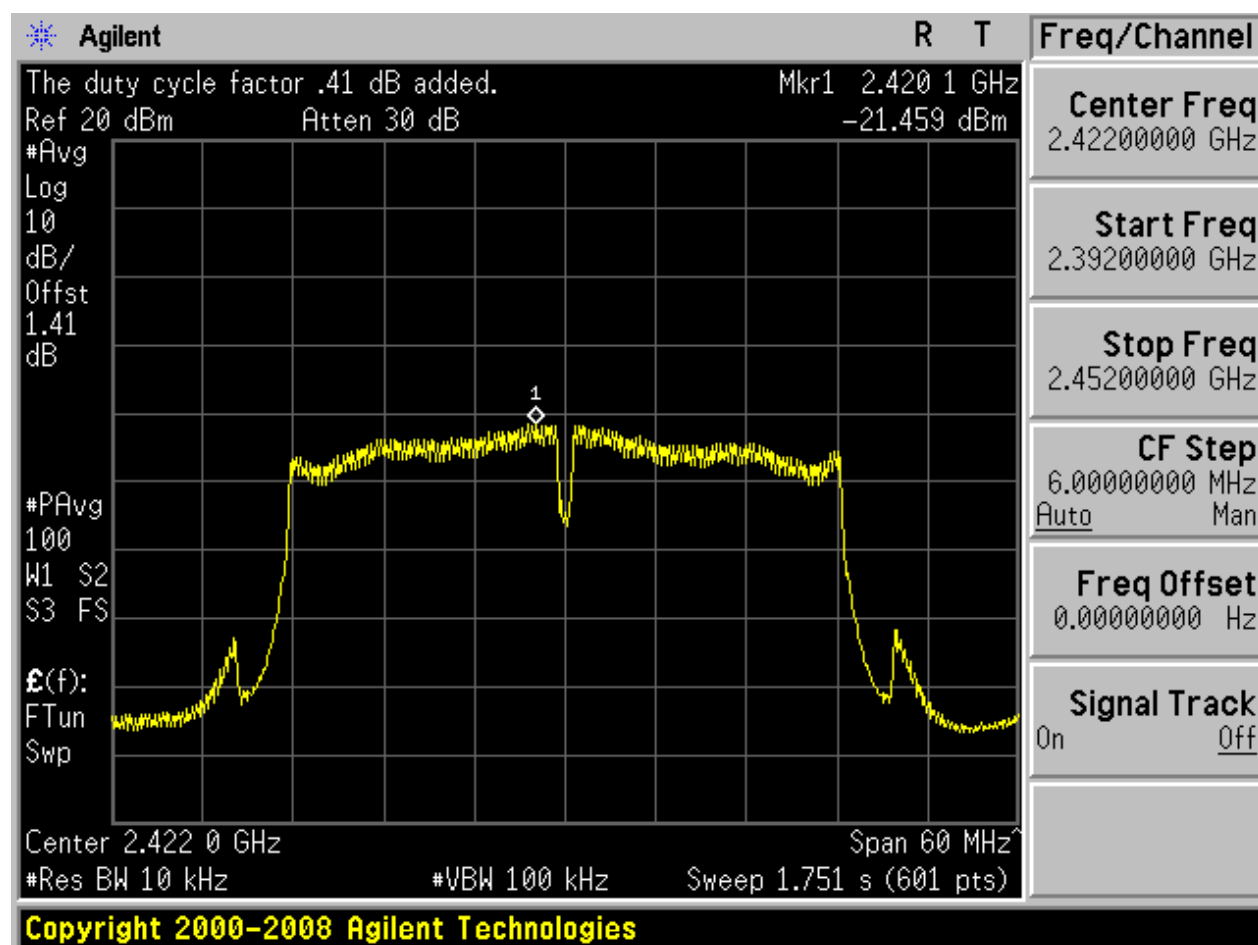





2.33 11N40m_M@Ant 1

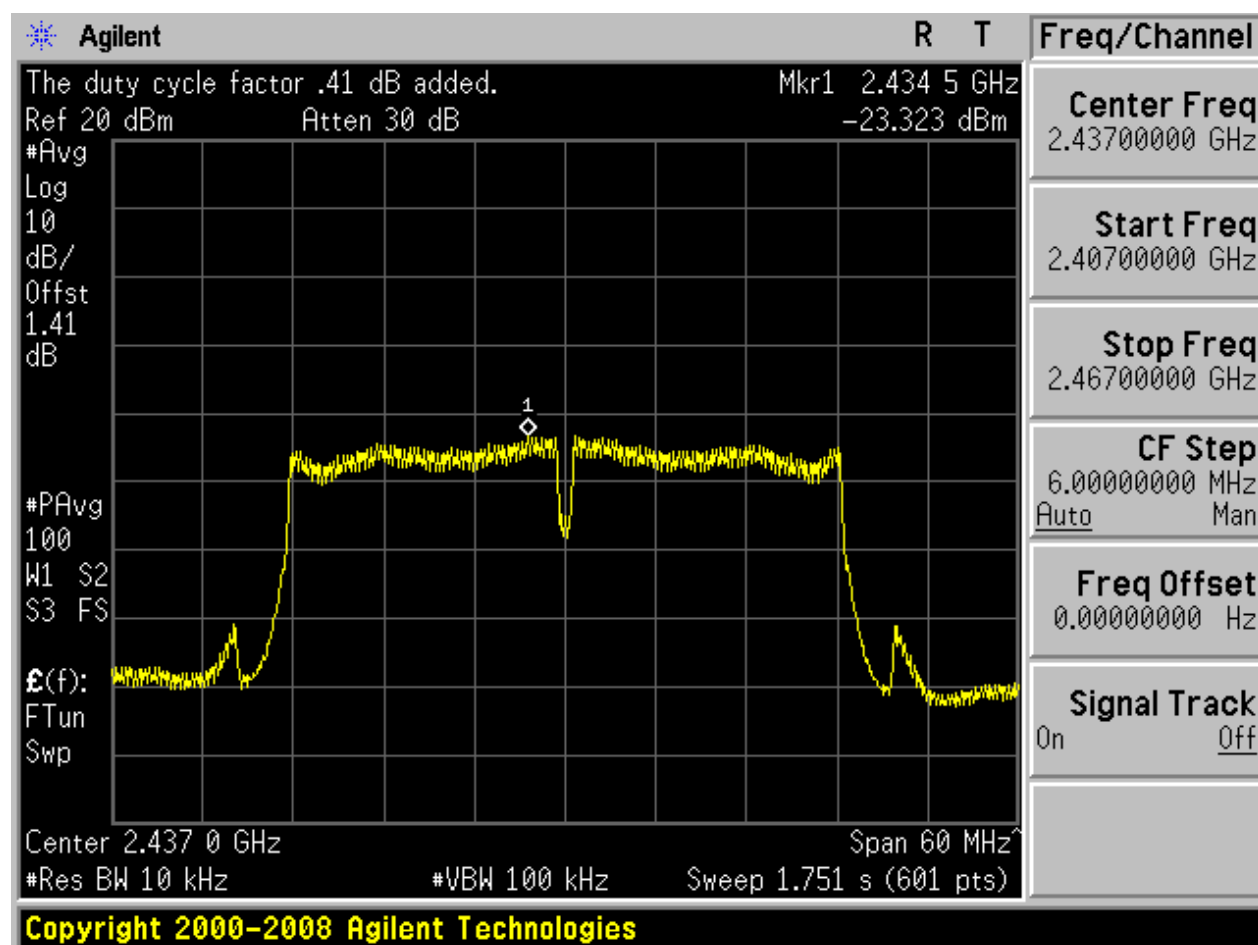

2.34 11N40m_M@Ant 2

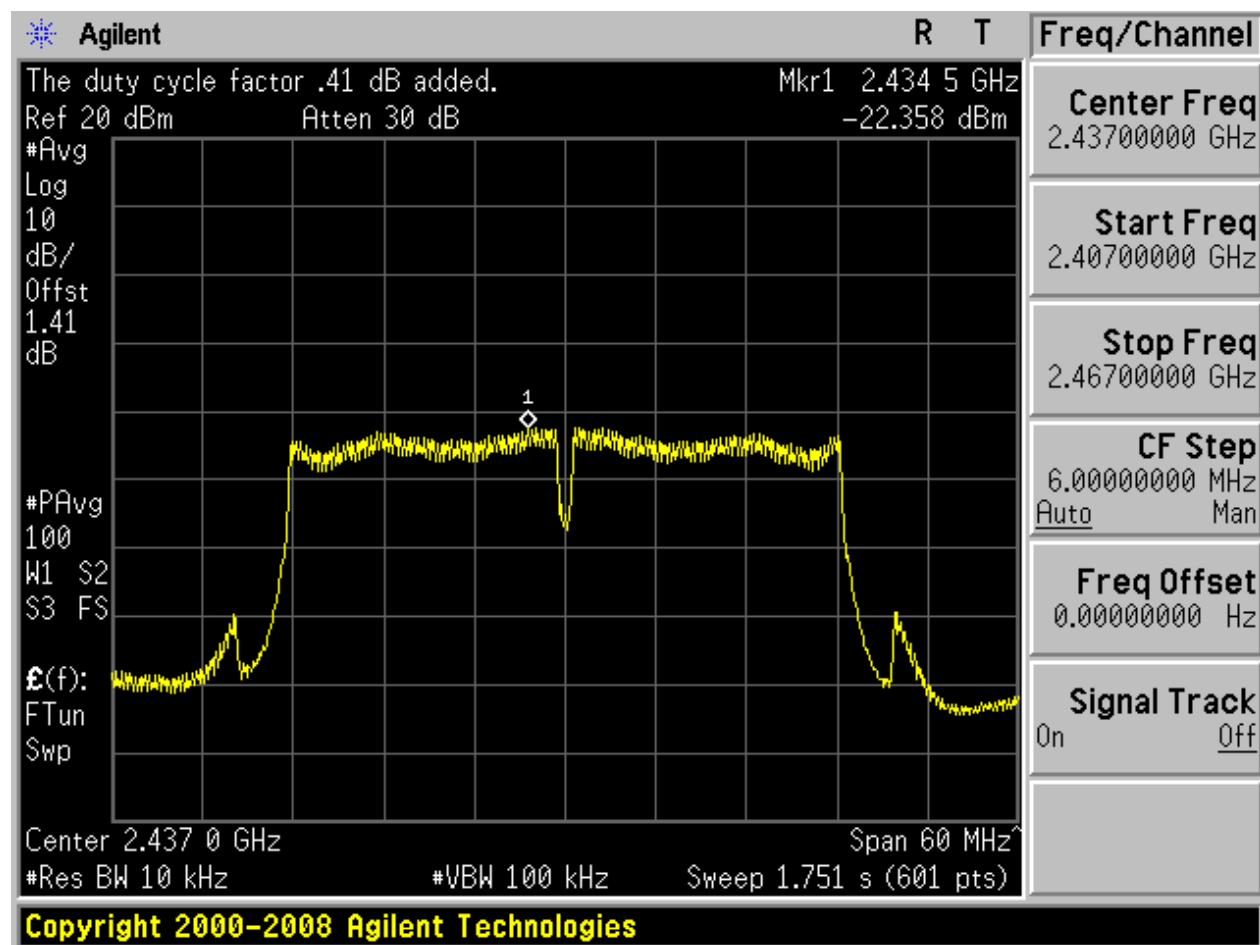


2.35 11N40m_H@Ant 1

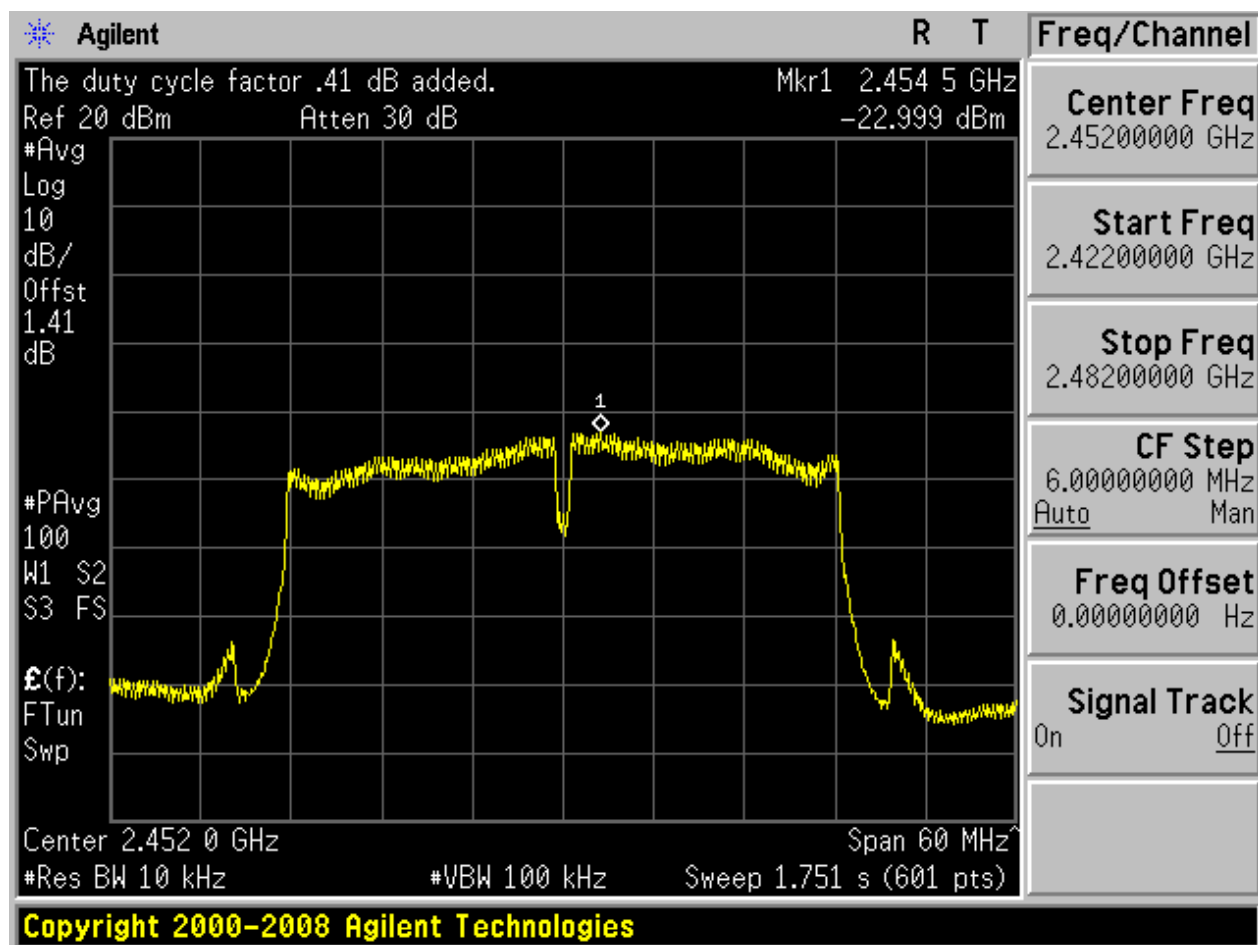



2.36 11N40m_H@Ant 2

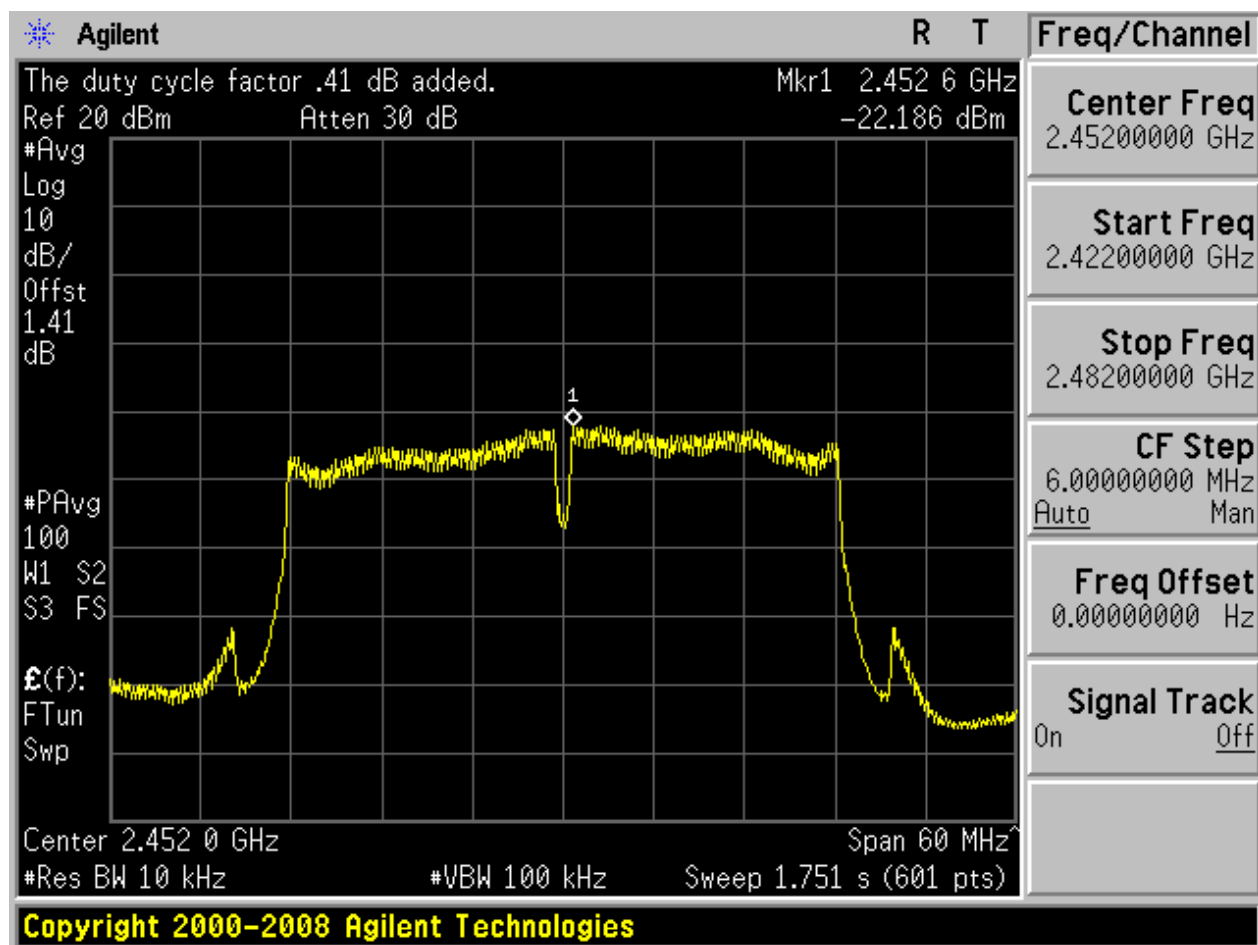

Appendix E: Band Edges Compliance


Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	Carrier Power[dBm]	Max.Spurious Level[dBm]	Verdict
11B	L	2412	Ant 1	7.77	-51.60	pass
11B	L	2412	Ant 2	8.42	-53.31	pass
11B	H	2462	Ant 1	6.93	-47.12	pass
11B	H	2462	Ant 2	7.97	-47.90	pass
11G	L	2412	Ant 1	.40	-49.34	pass
11G	L	2412	Ant 2	1.49	-50.85	pass
11G	H	2462	Ant 1	.33	-45.78	pass
11G	H	2462	Ant 2	1.76	-44.84	pass
11N20	L	2412	Ant 1	-1.73	-52.48	pass
11N20	L	2412	Ant 2	-.40	-51.70	pass
11N20	H	2462	Ant 1	-1.67	-49.18	pass
11N20	H	2462	Ant 2	-.64	-47.17	pass
11N20m	L	2412	Ant 1	-1.67	-50.80	pass
11N20m	L	2412	Ant 2	-.46	-50.61	pass
11N20m	H	2462	Ant 1	-1.37	-47.82	pass
11N20m	H	2462	Ant 2	-1.28	-46.79	pass
11N40	L	2422	Ant 1	-4.18	-47.14	pass
11N40	L	2422	Ant 2	-2.39	-47.71	pass

Test Mode	Test Channel	Frequency[MHz]	Ant	Carrier Power[dBm]	Max.Spurious Level[dBm]	Verdict
11N40	H	2452	Ant 1	-4.28	-44.72	pass
11N40	H	2452	Ant 2	-3.58	-45.19	pass
11N40m	L	2422	Ant 1	-4.01	-48.65	pass
11N40m	L	2422	Ant 2	-2.92	-45.77	pass
11N40m	H	2452	Ant 1	-4.78	-44.14	pass
11N40m	H	2452	Ant 2	-3.44	-45.63	pass


Part II - Test Plots

2.1 11B_L@Ant 1

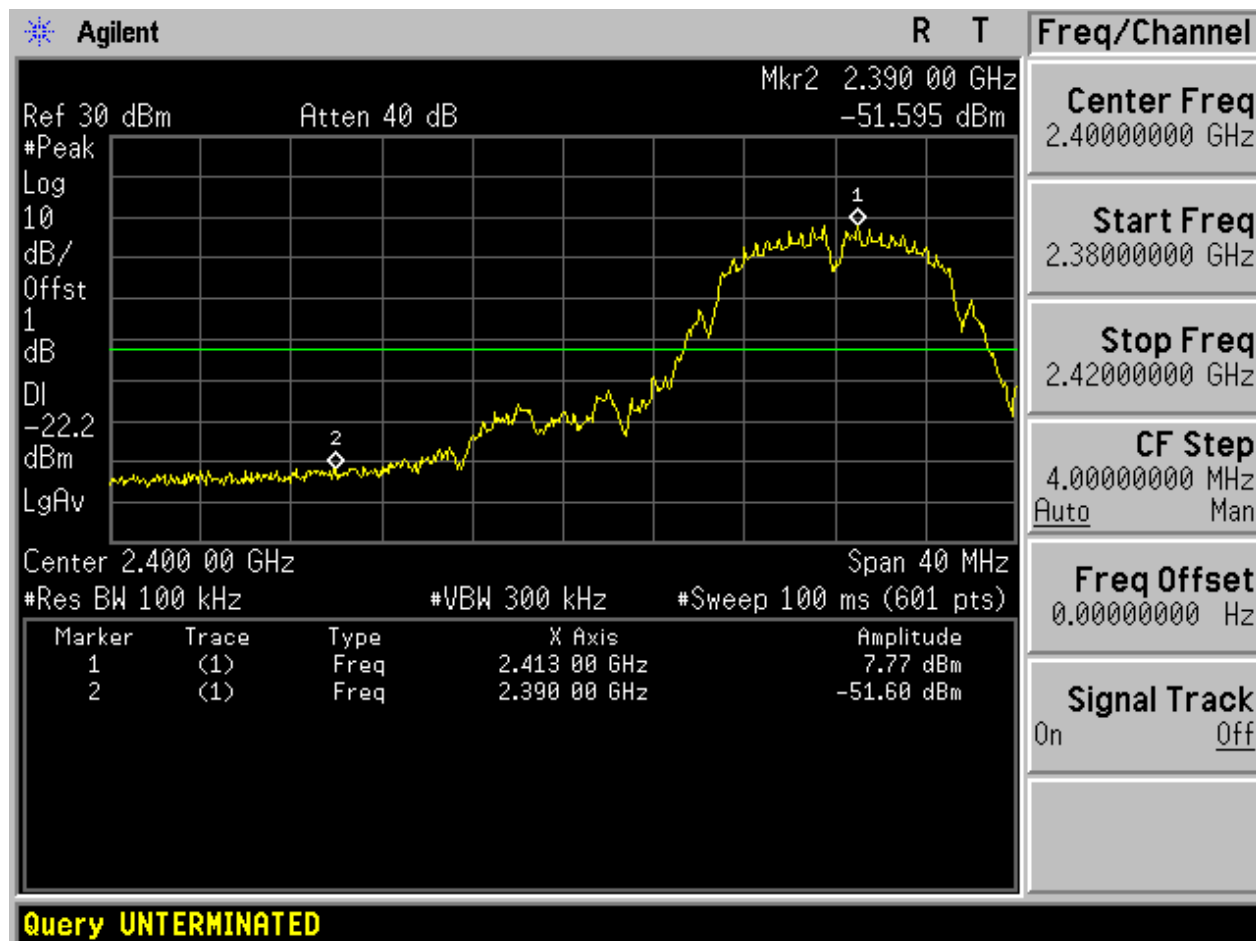




2.2 11B_L@Ant 2

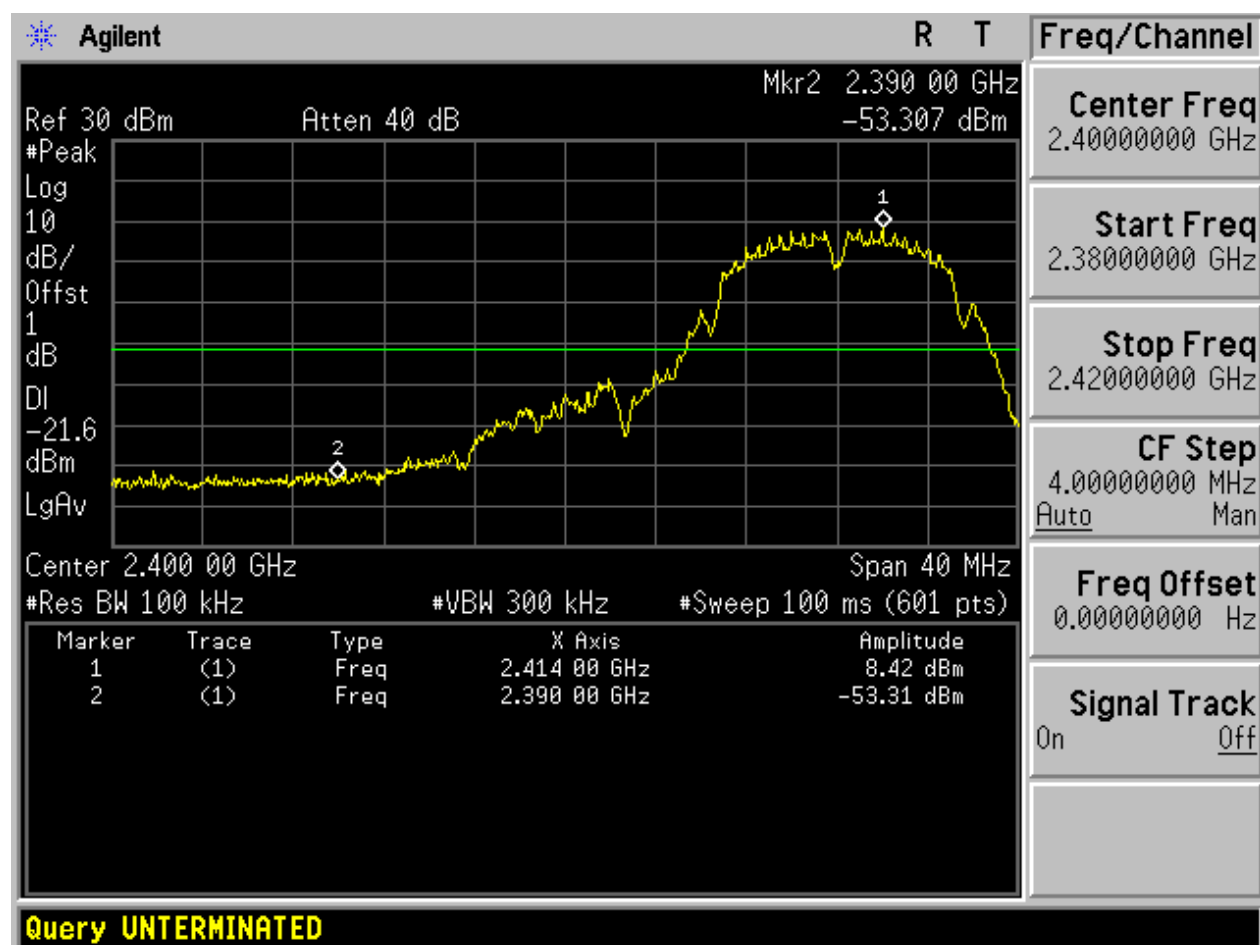




2.3 11B_H@Ant 1

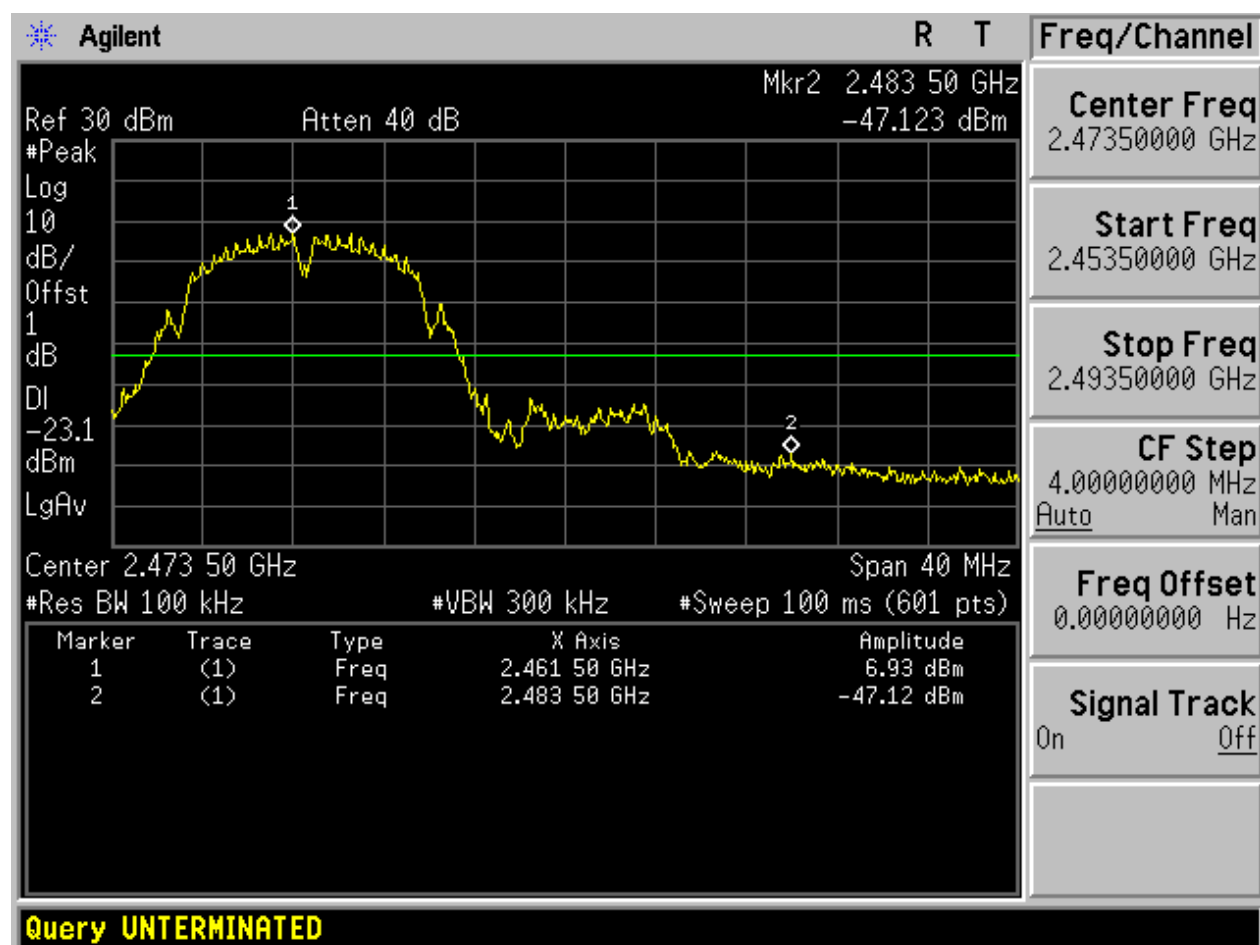




2.4 11B_H@Ant 2

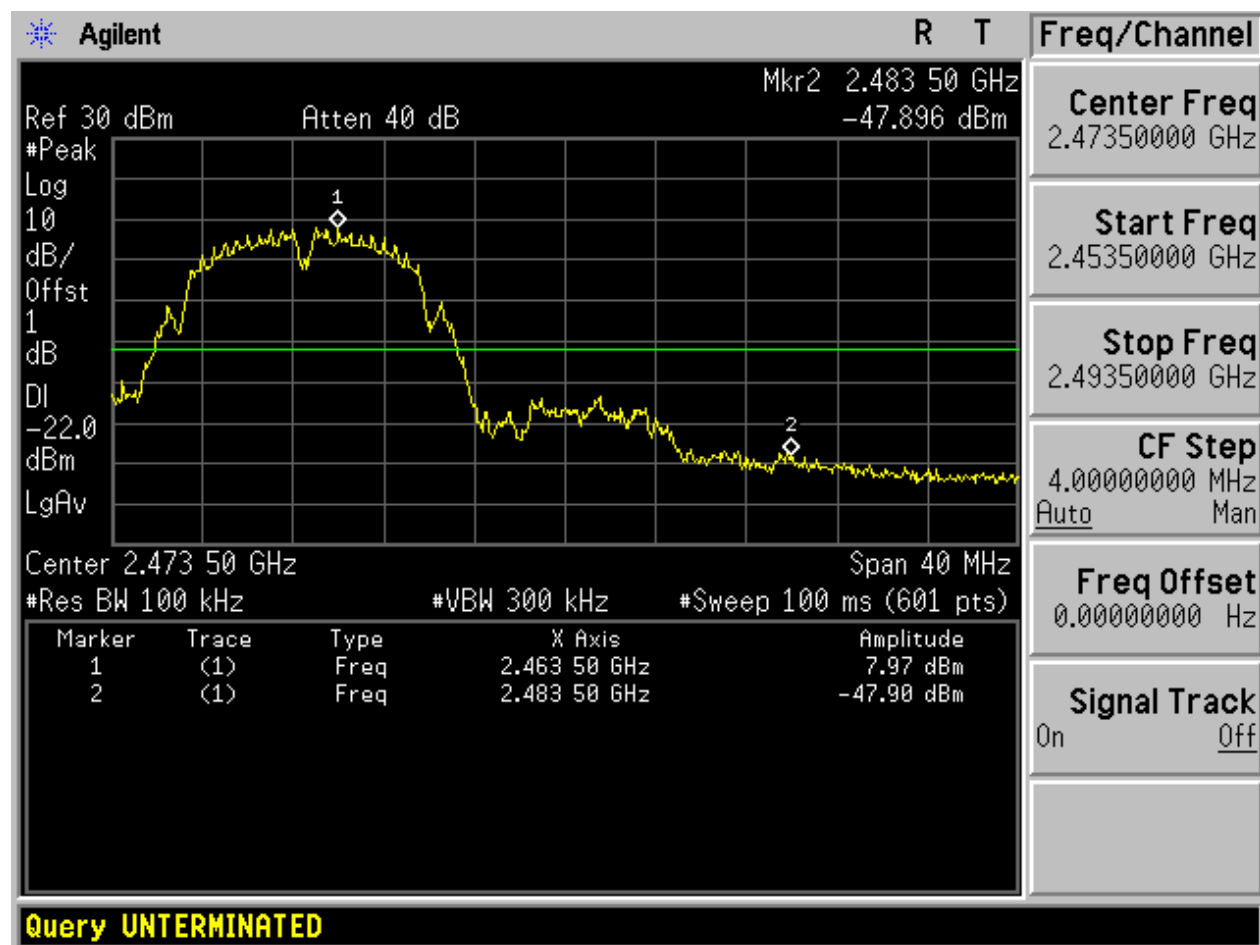




2.5 11G_L@Ant 1

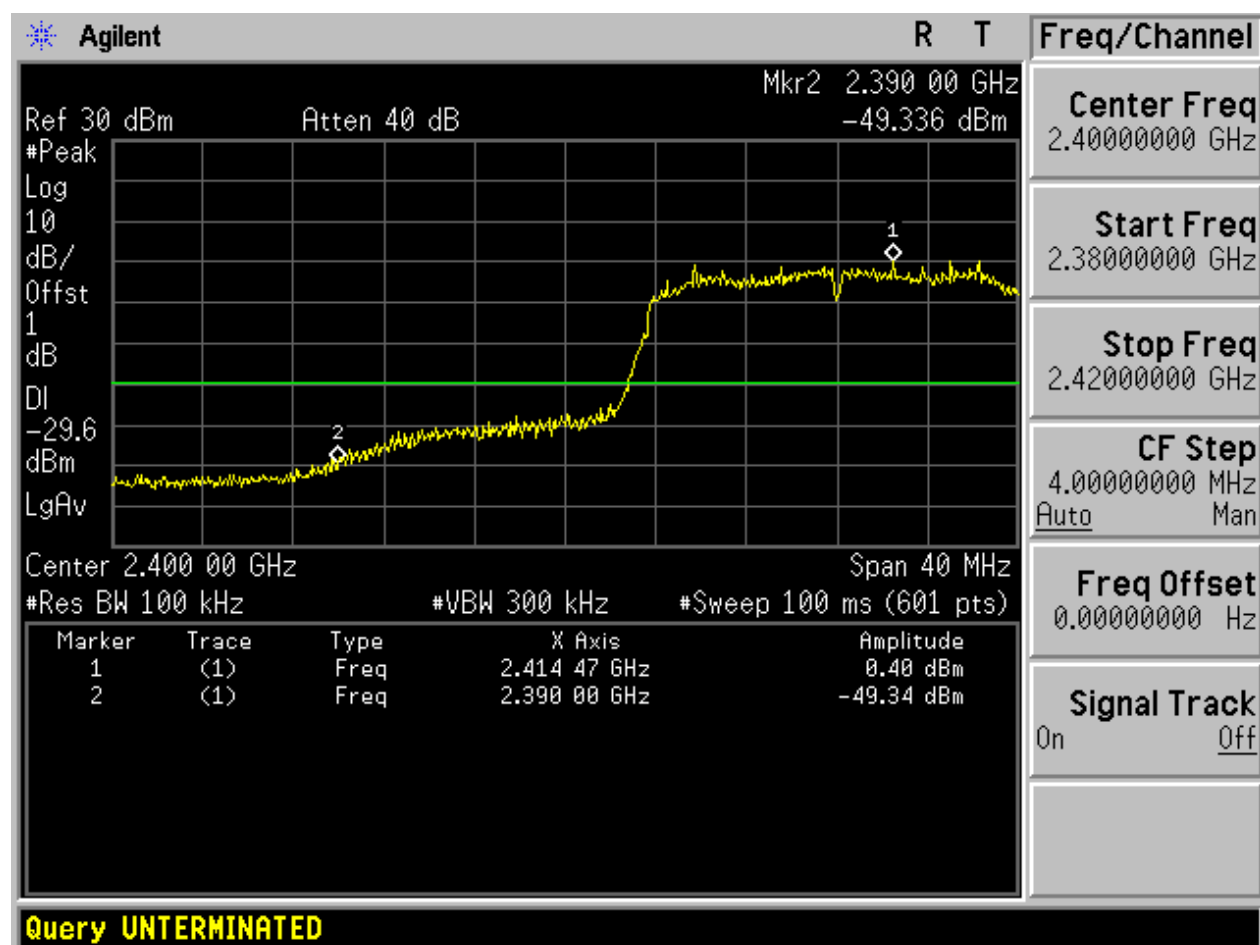


2.6 11G_L@Ant 2

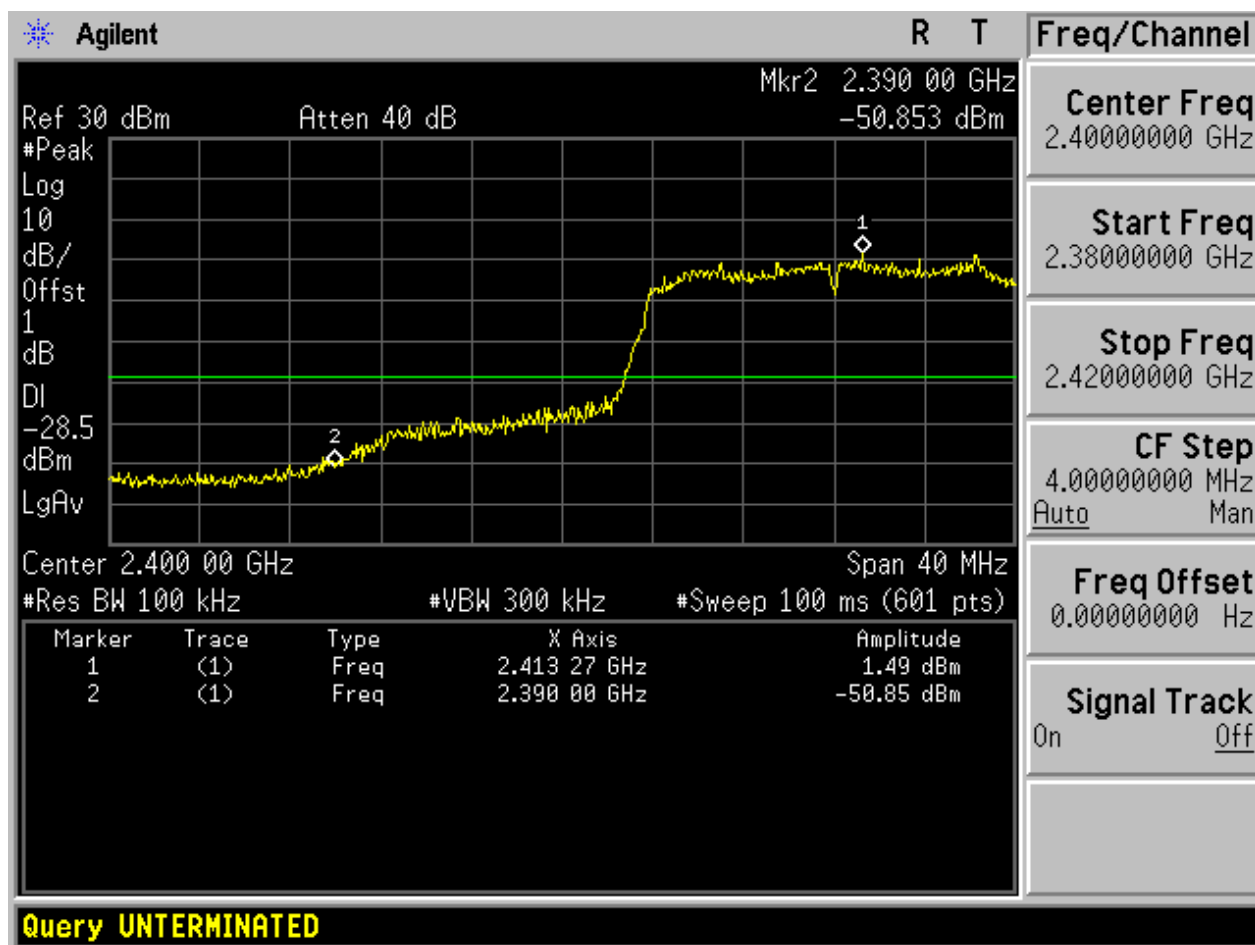




2.7 11G_H@Ant 1

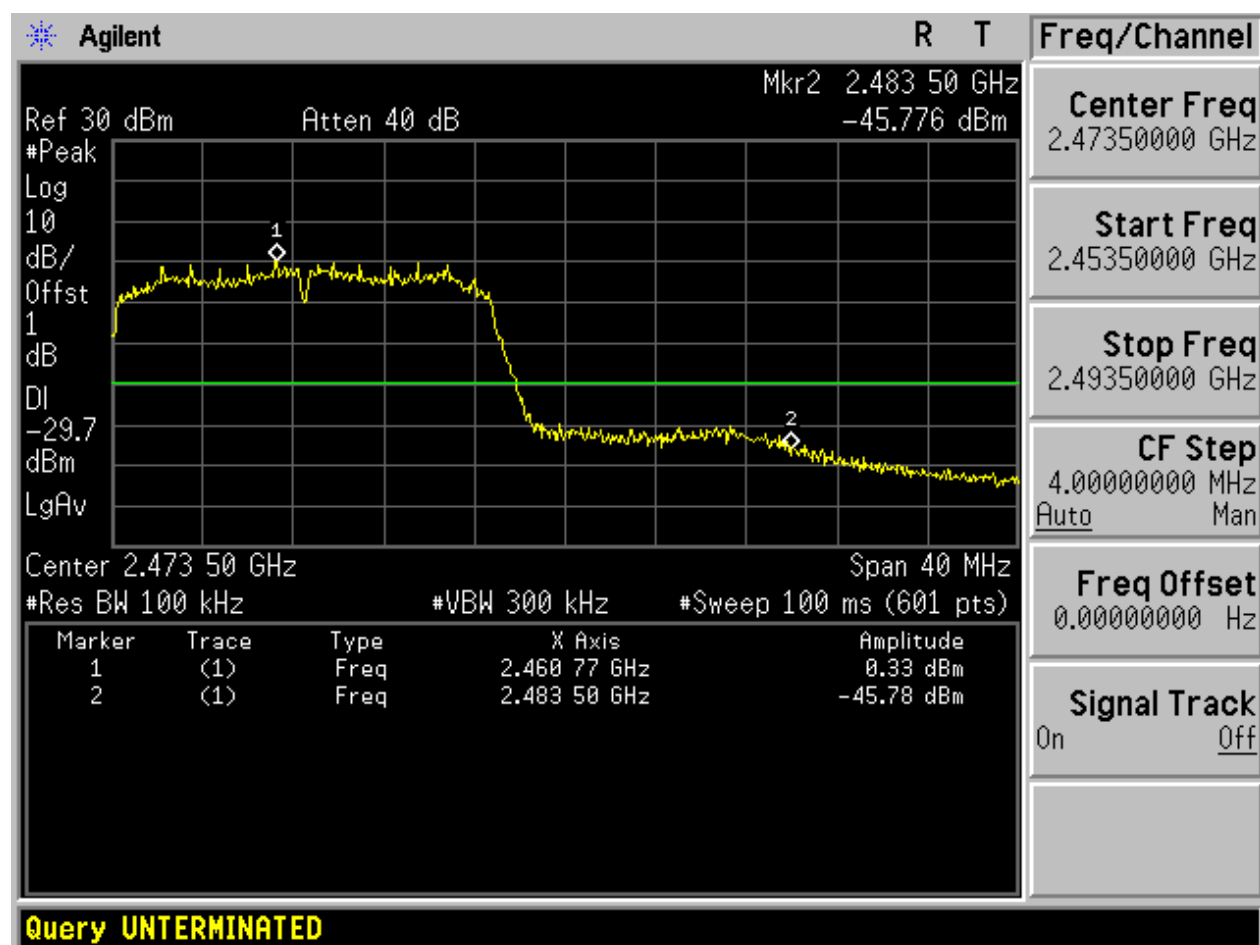




2.8 11G_H@Ant 2

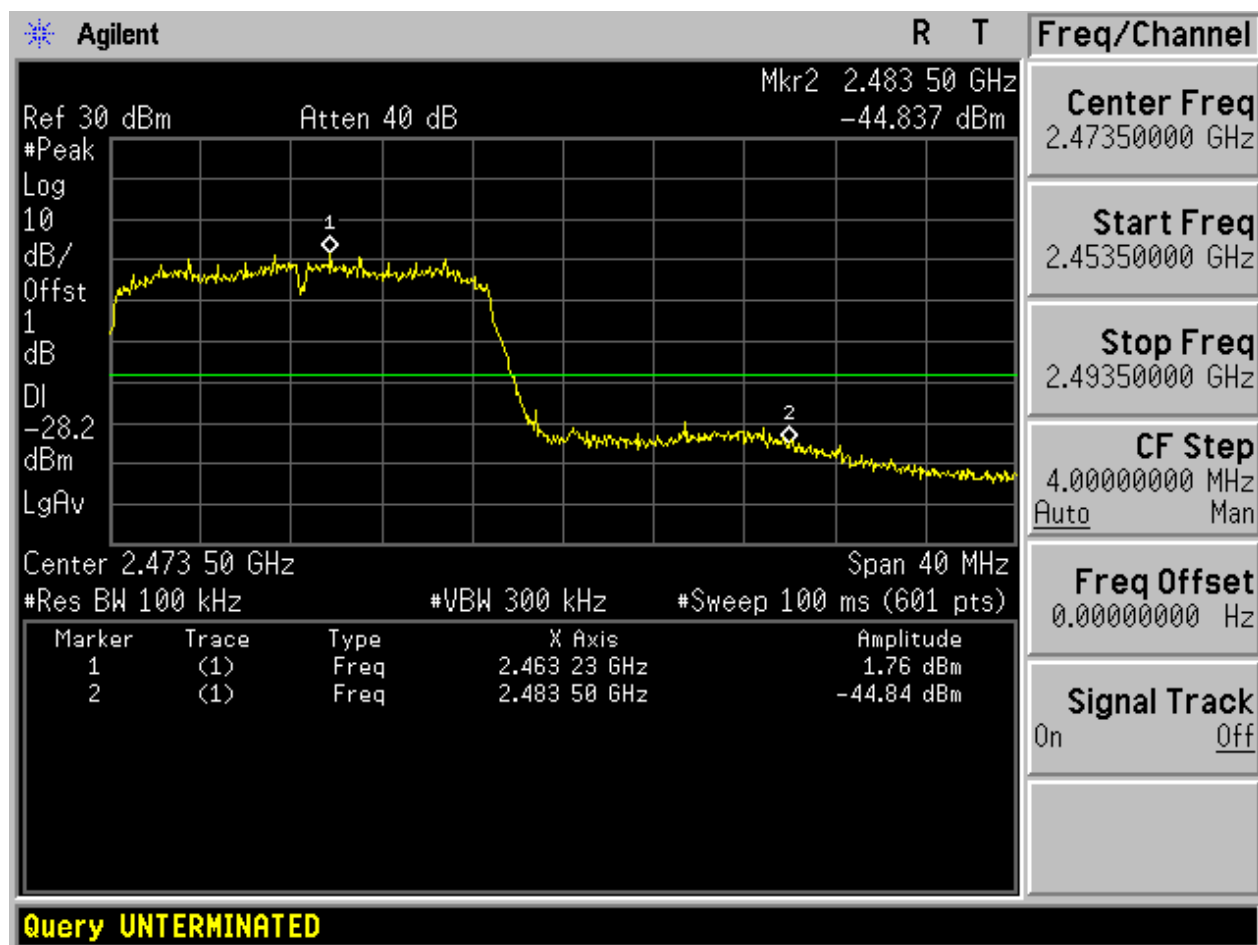




2.9 11N20_L@Ant 1

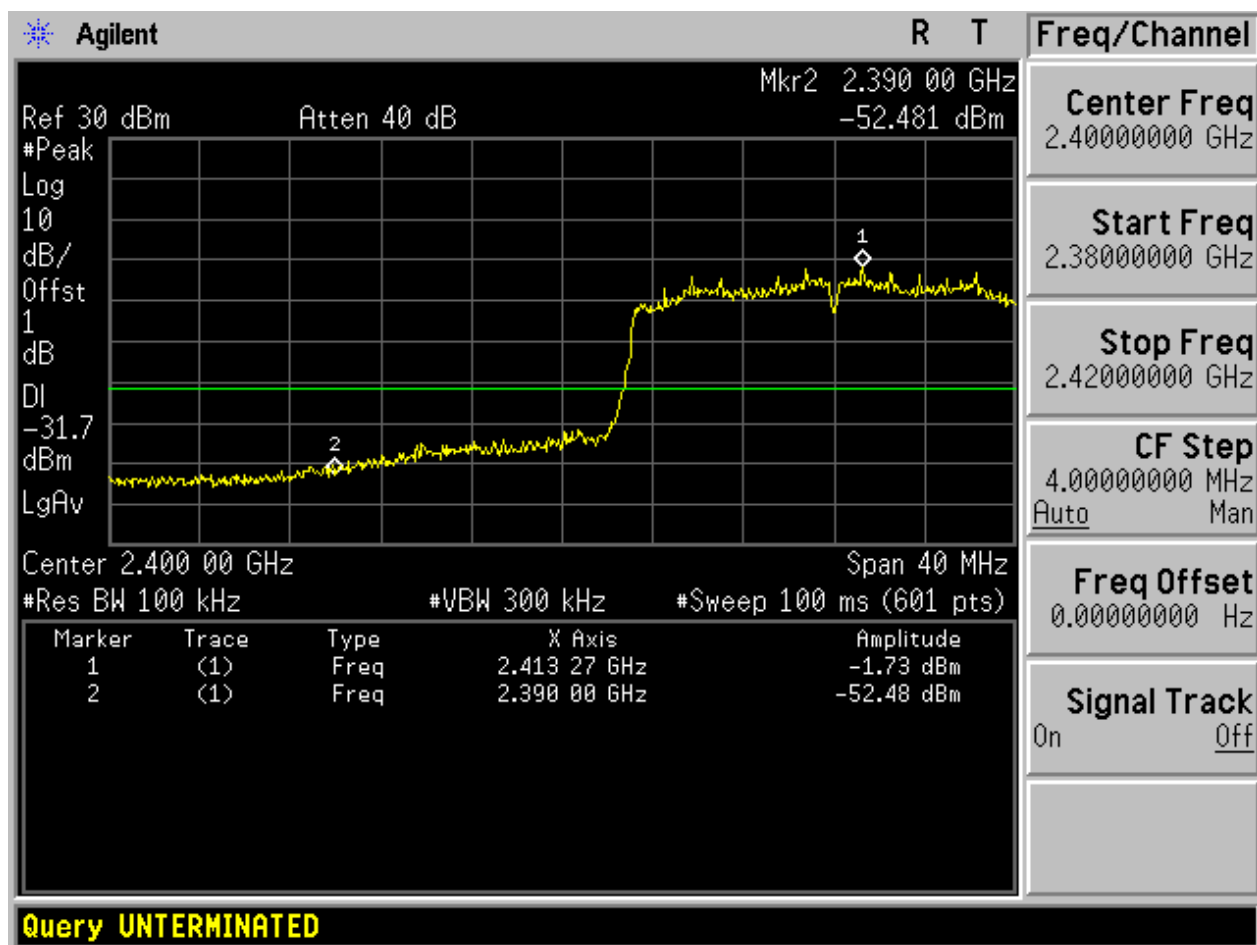




2.10 11N20_L@Ant 2

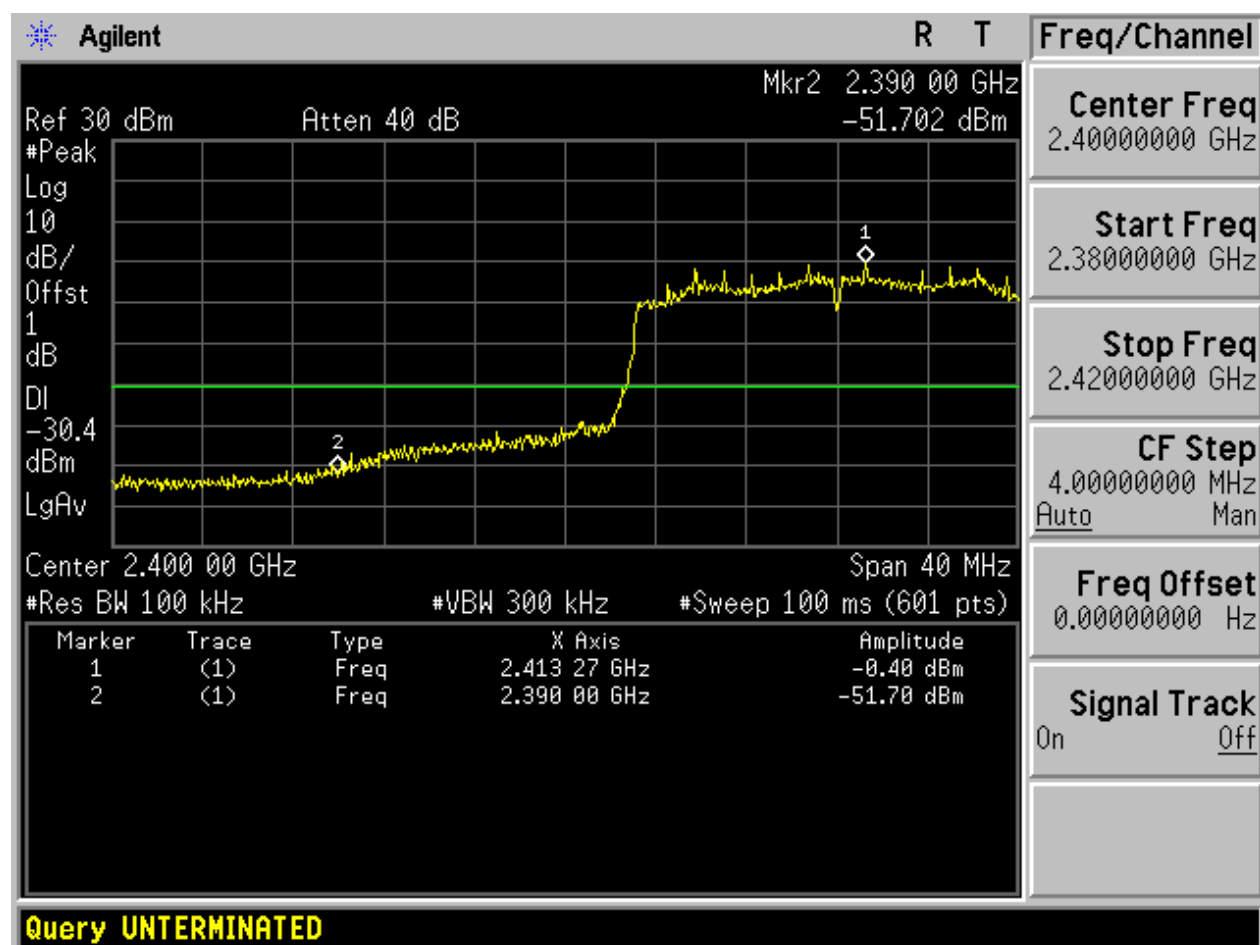




2.11 11N20_H@Ant 1

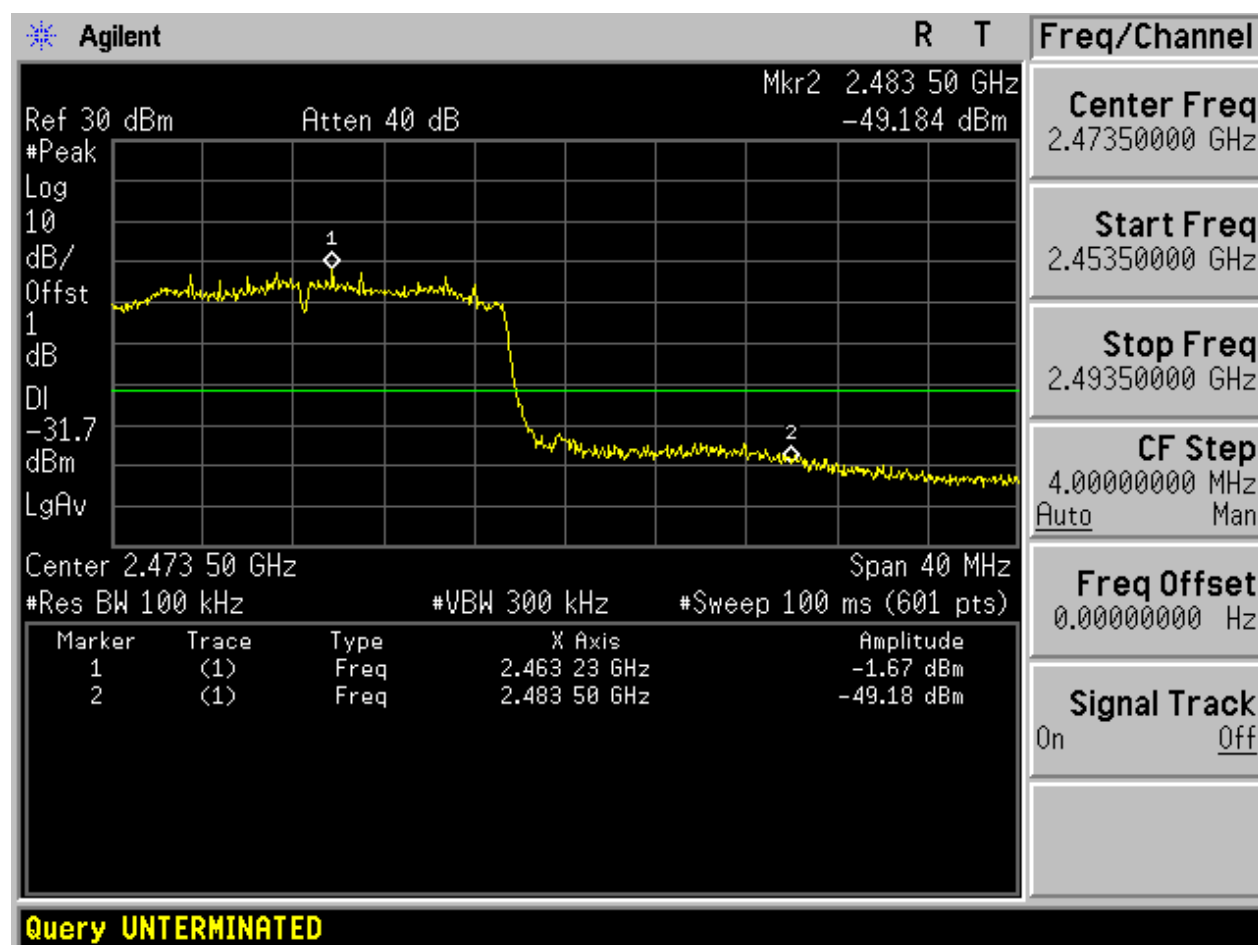




2.12 11N20_H@Ant 2

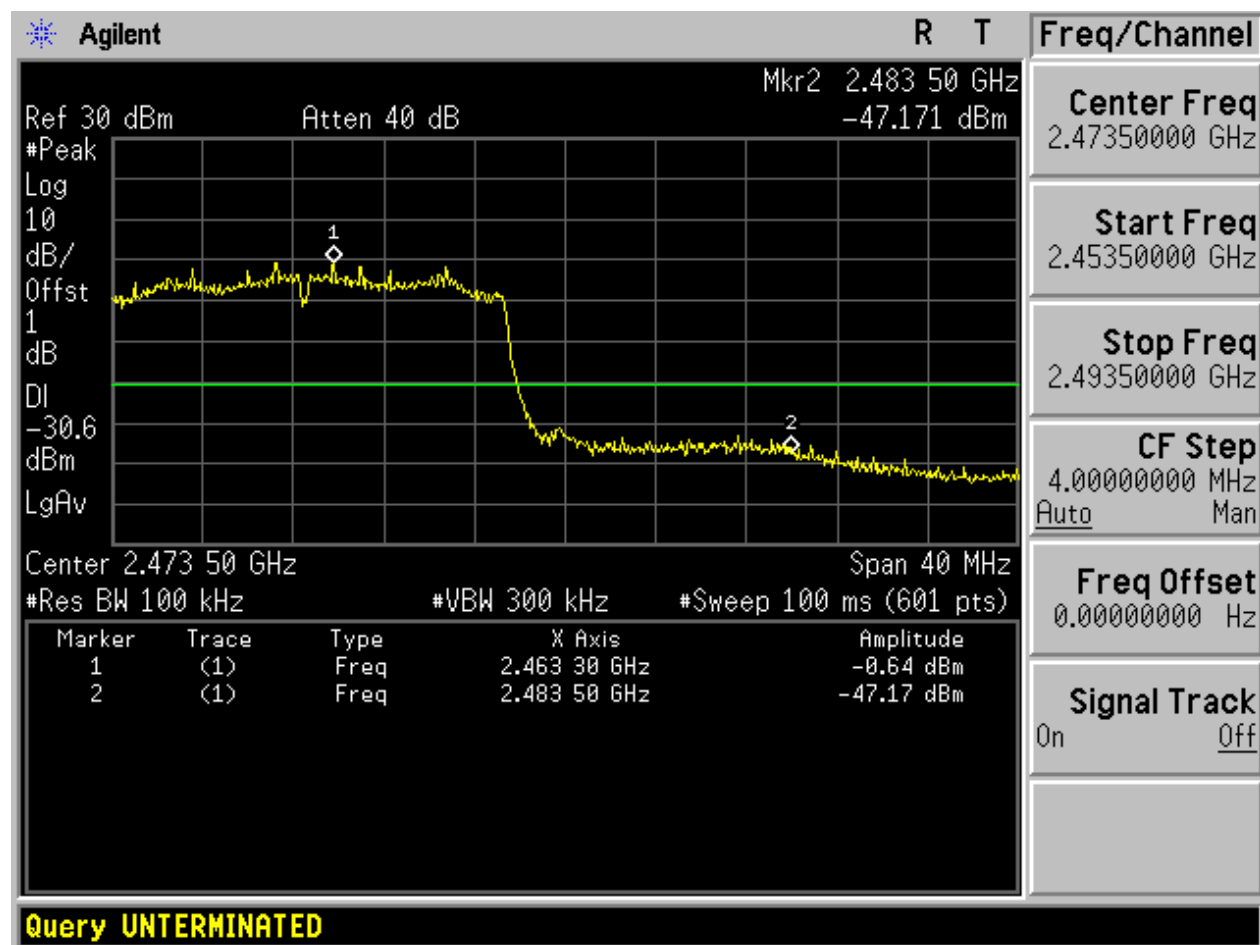




2.9 11N20m_L@Ant 1

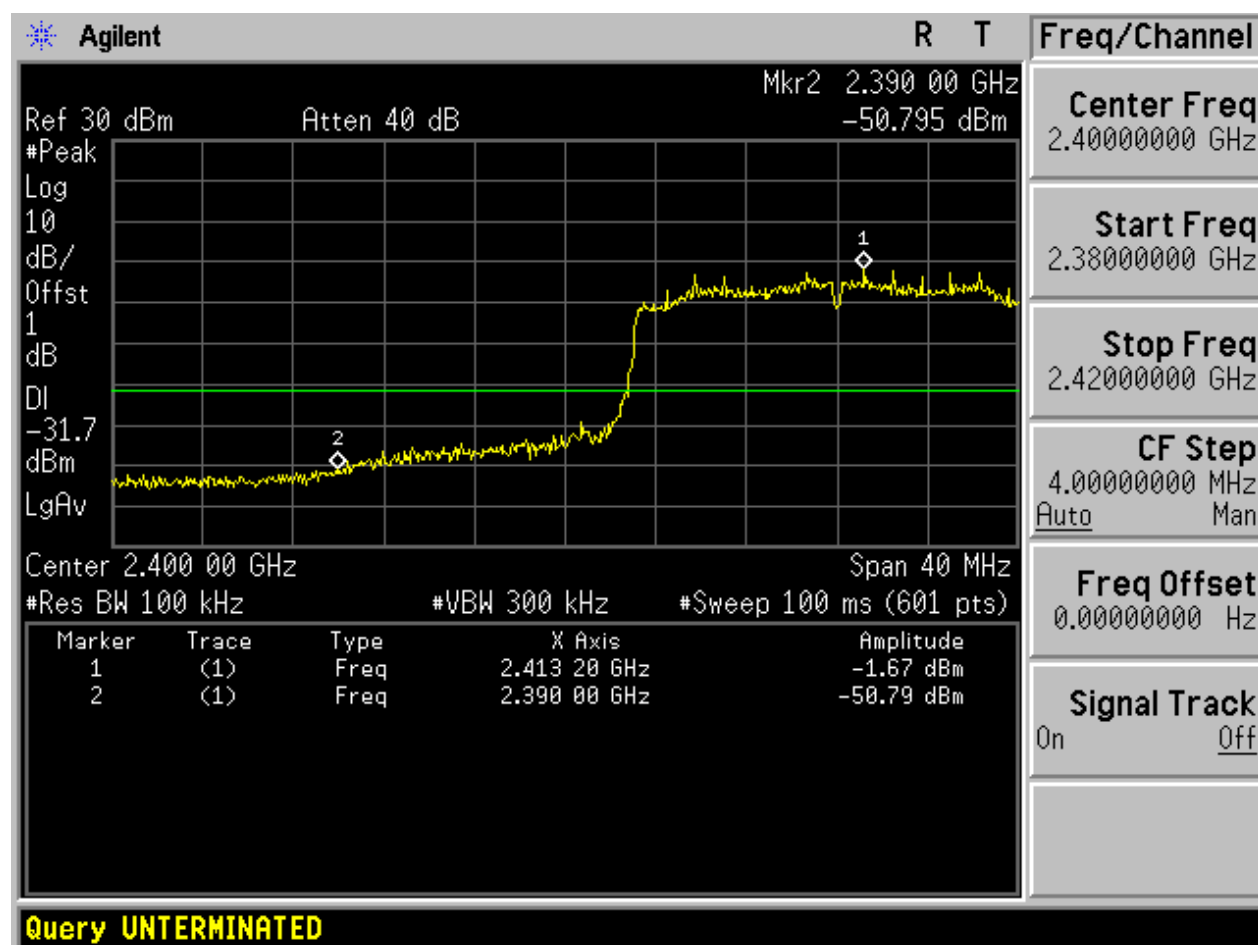




2.10 11N20m_L@Ant 2

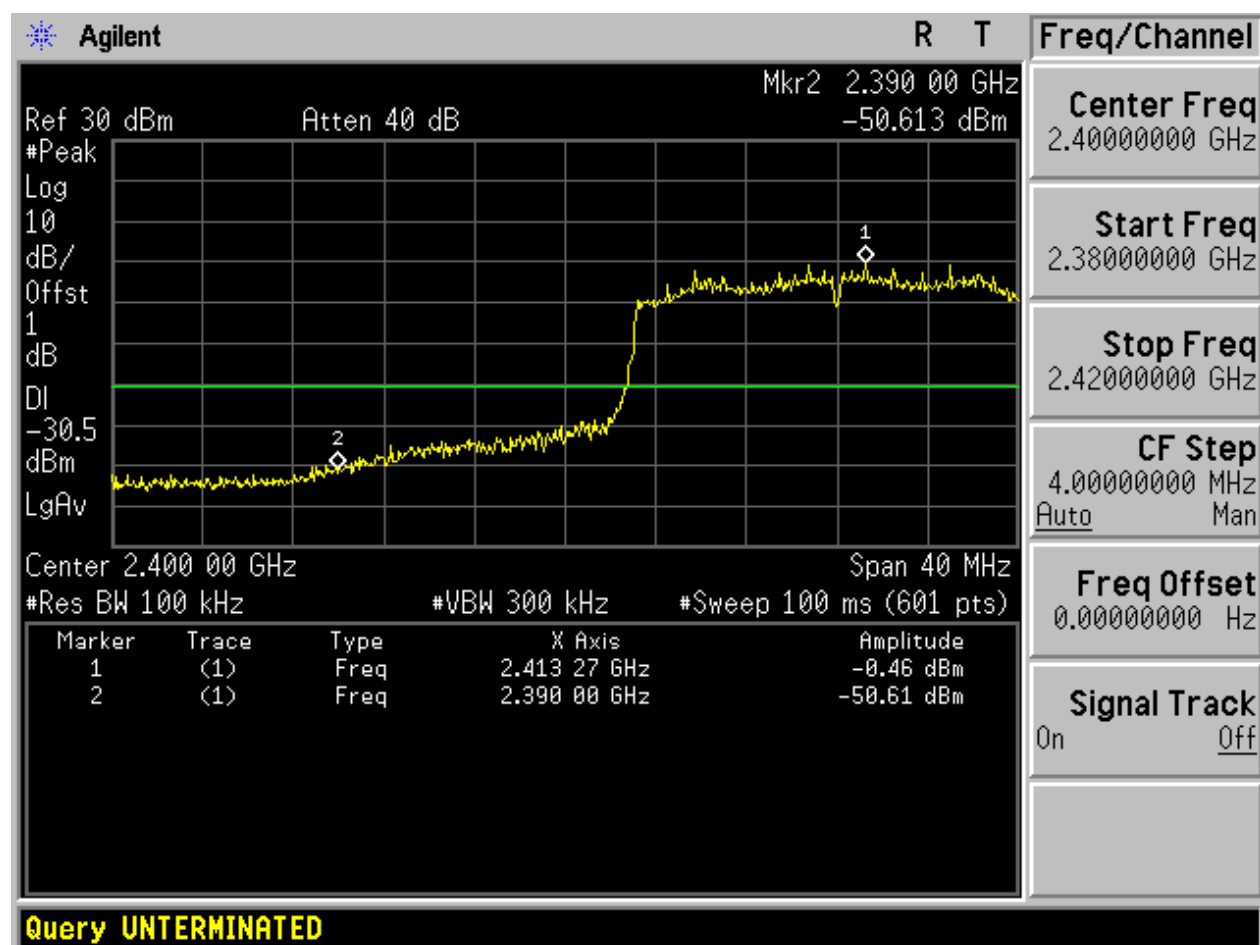




2.11 11N20m_H@Ant 1

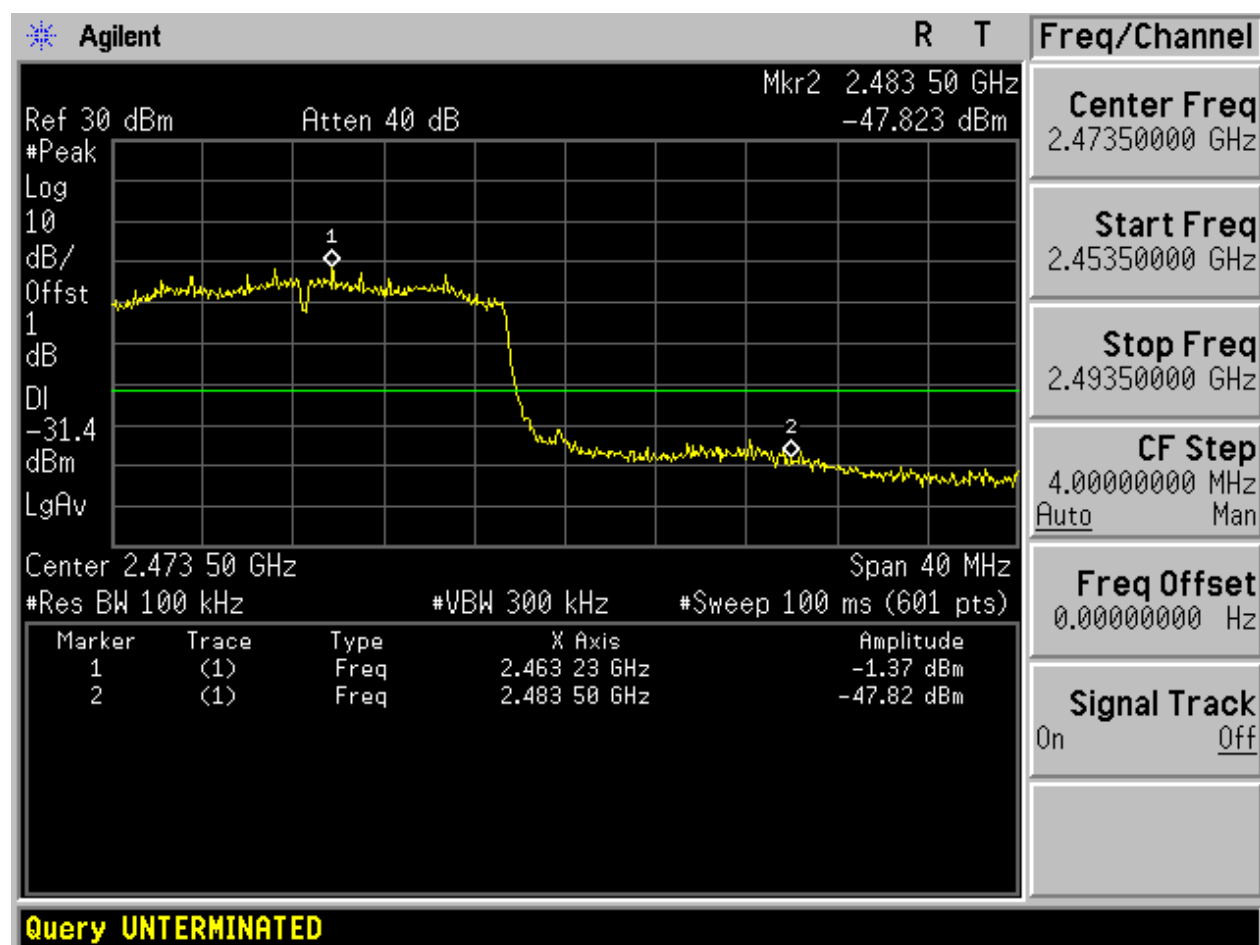




2.12 11N20m_H@Ant 2

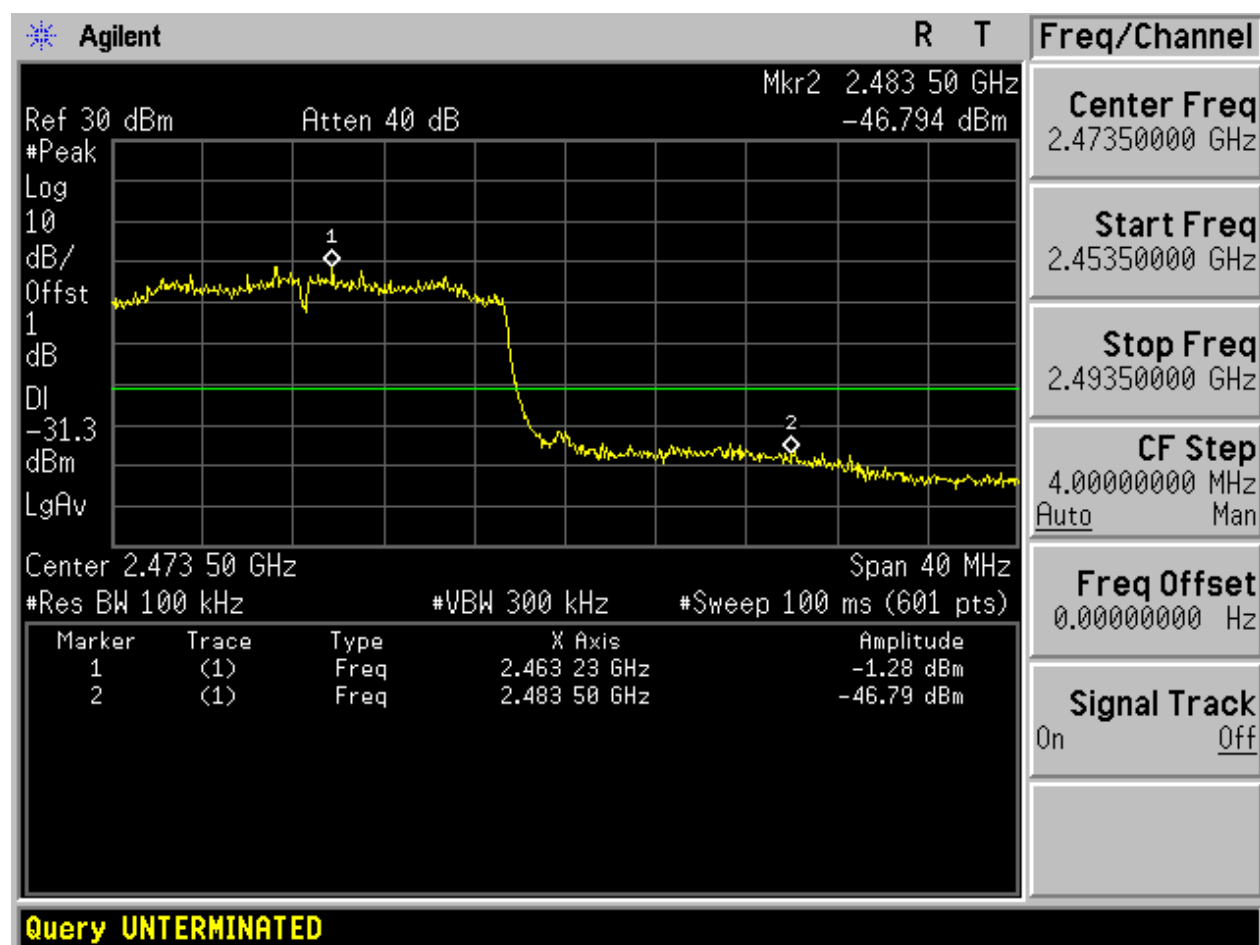




2.13 11N40_L@Ant 1

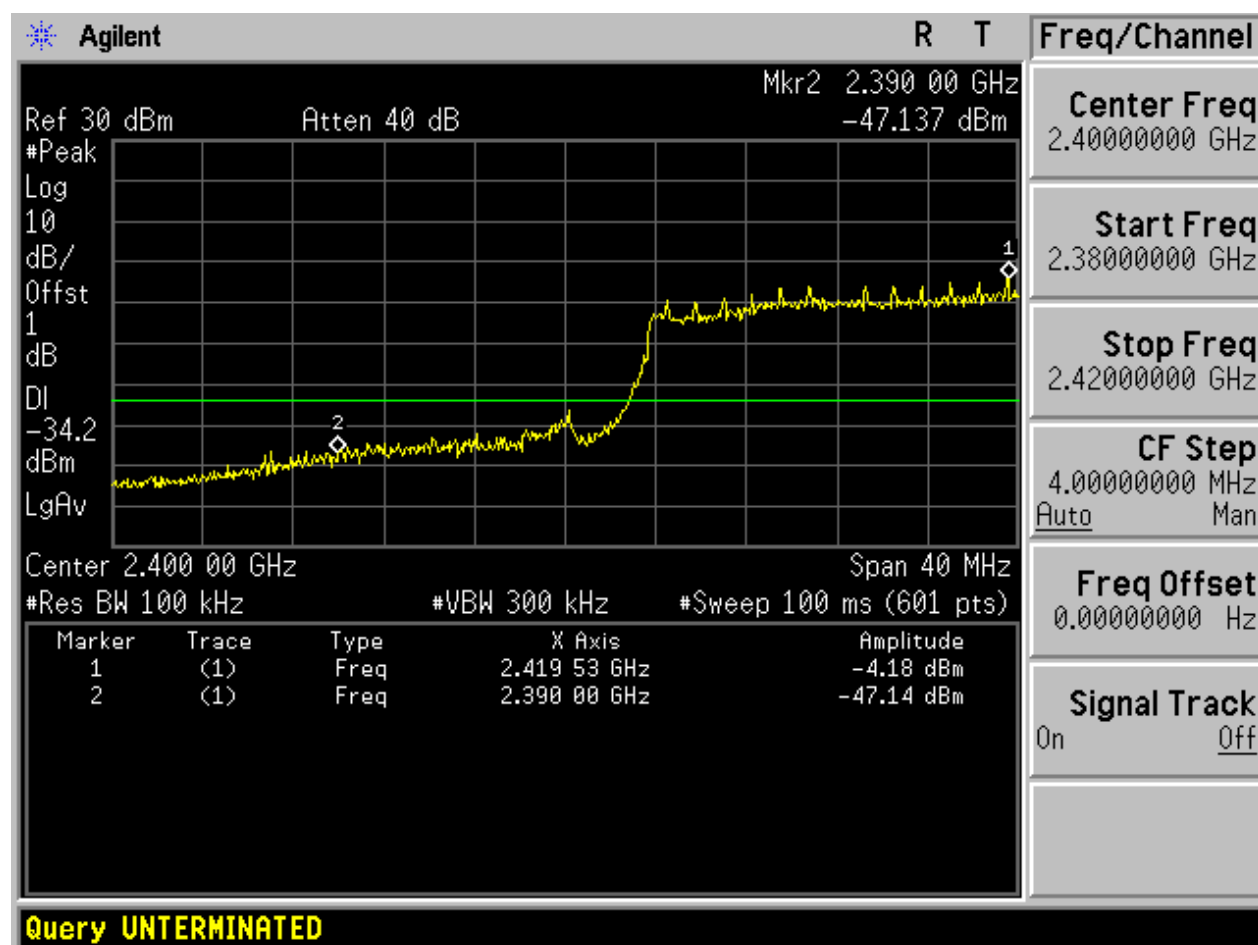


2.14 11N40_L@Ant 2

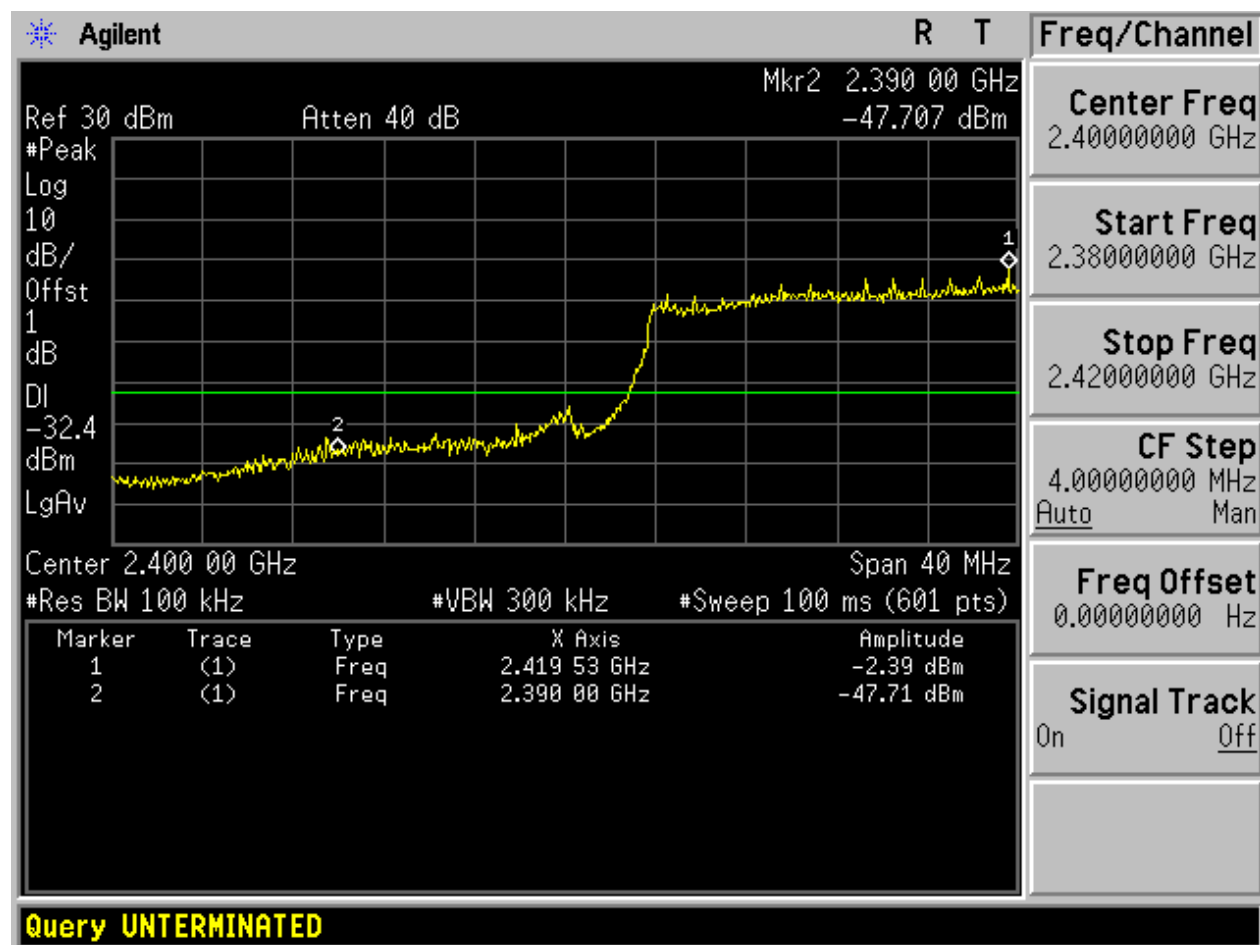




2.15 11N40_H@Ant 1

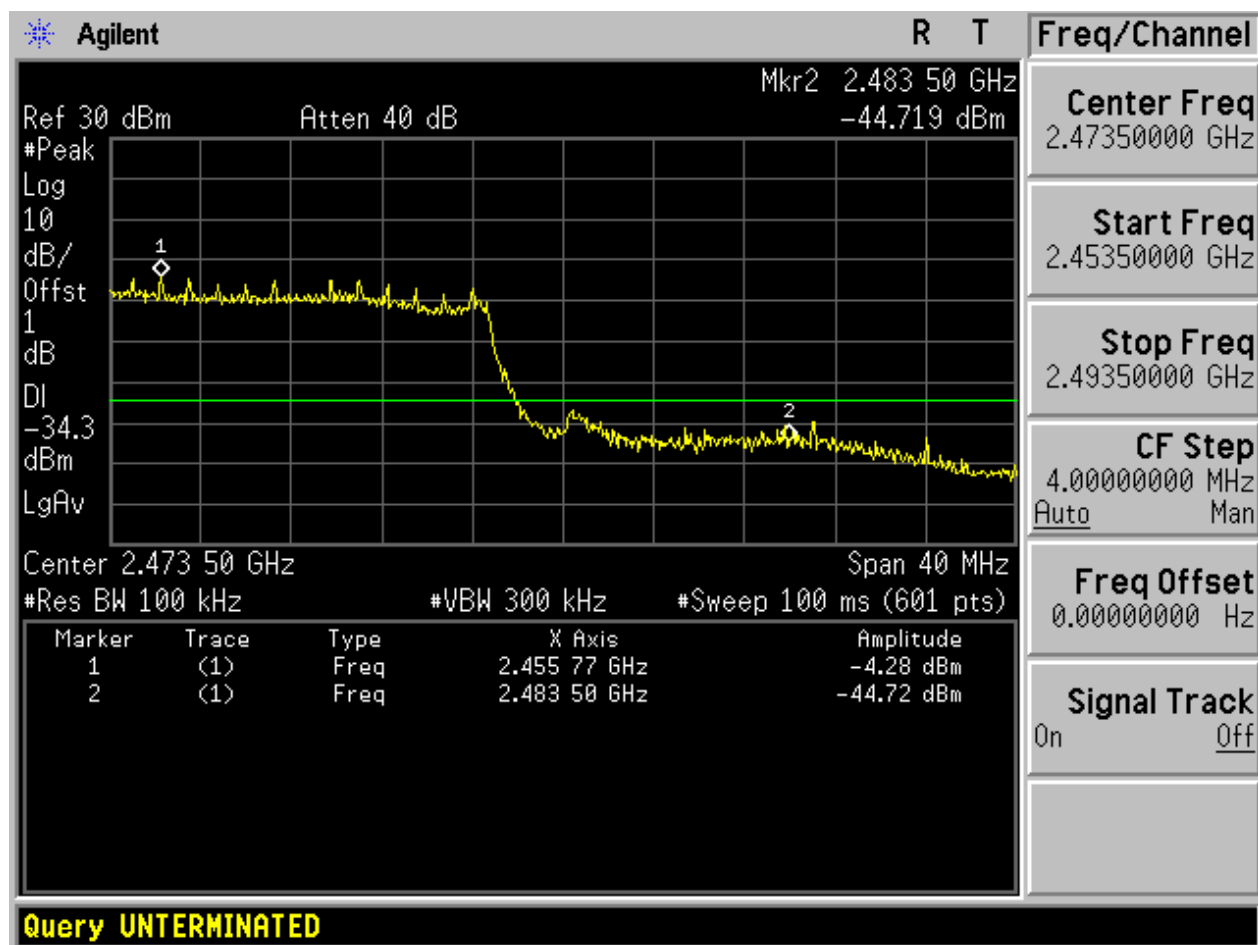




2.16 11N40_H@Ant 2

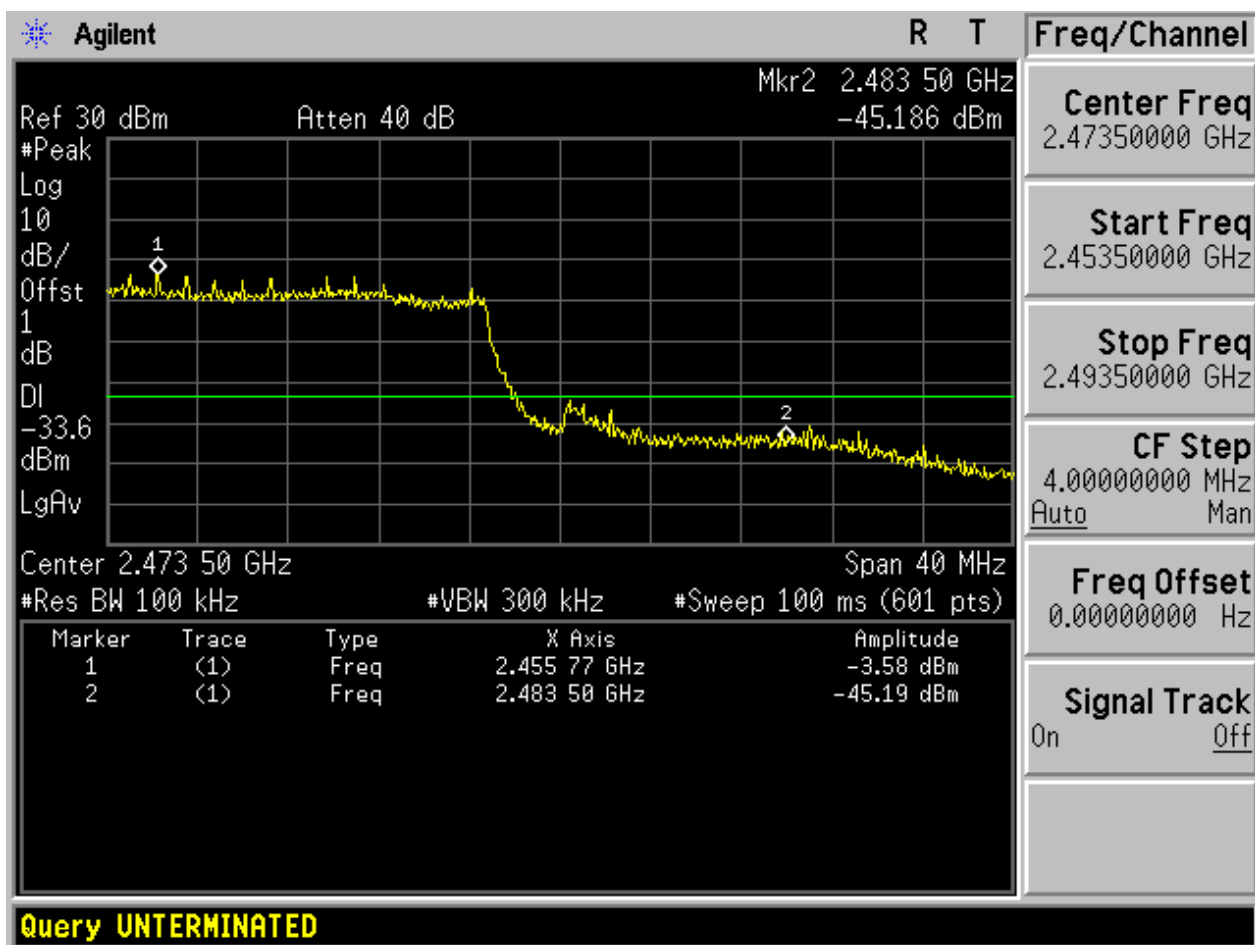




2.21 11N40m_L@Ant 1

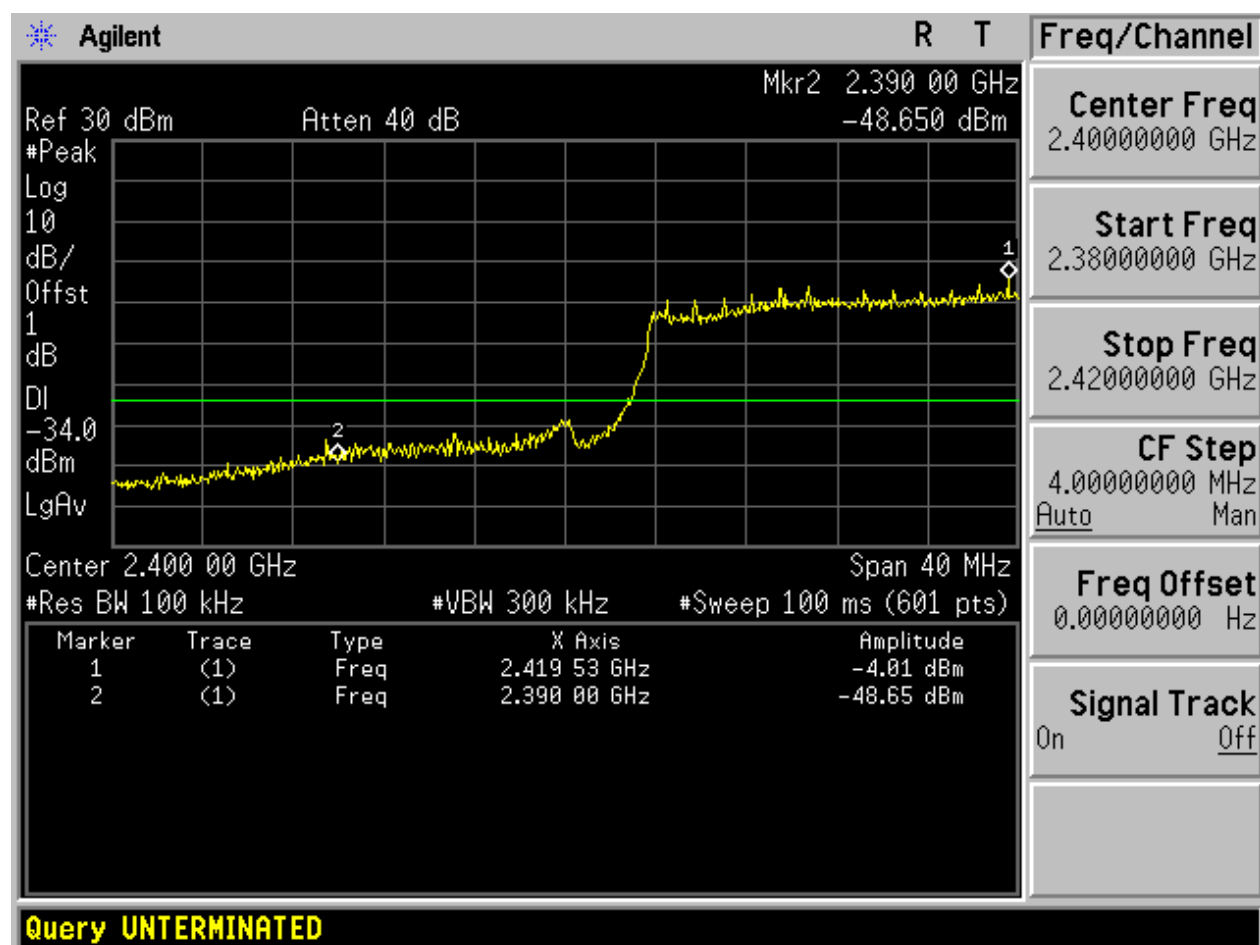




2.22 11N40m_L@Ant 2

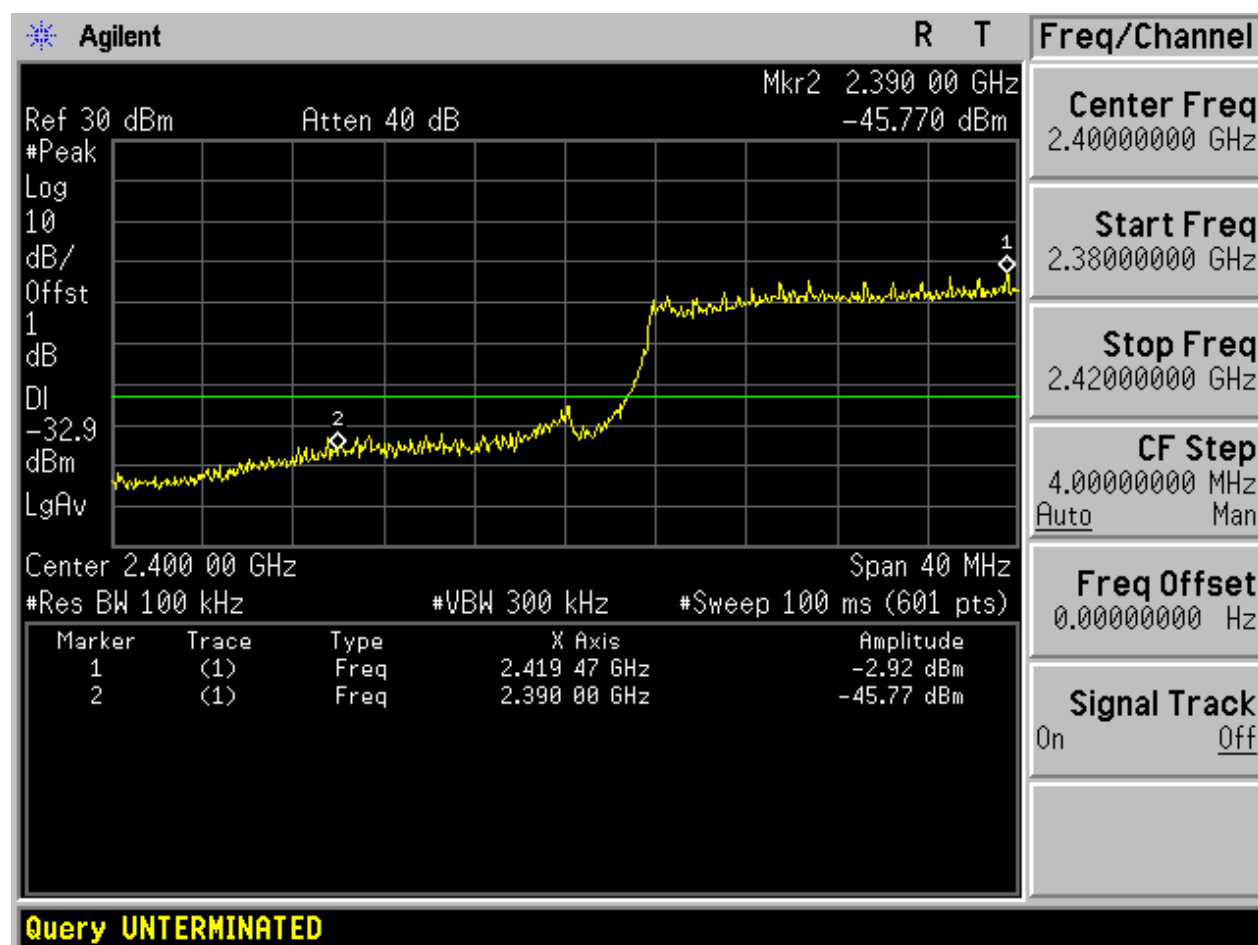




2.23 11N40m_H@Ant 1

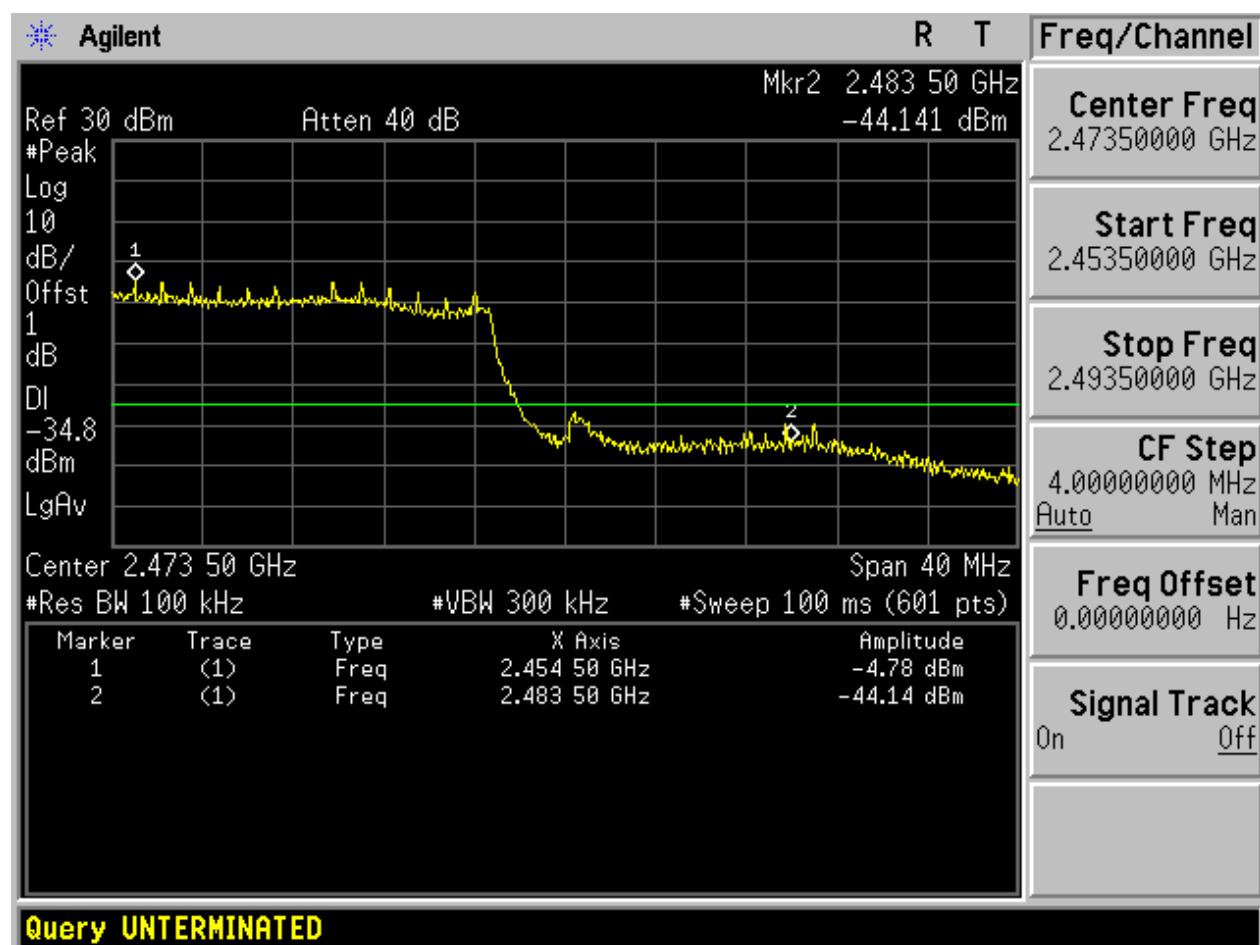



2.24 11N40m_H@Ant 2

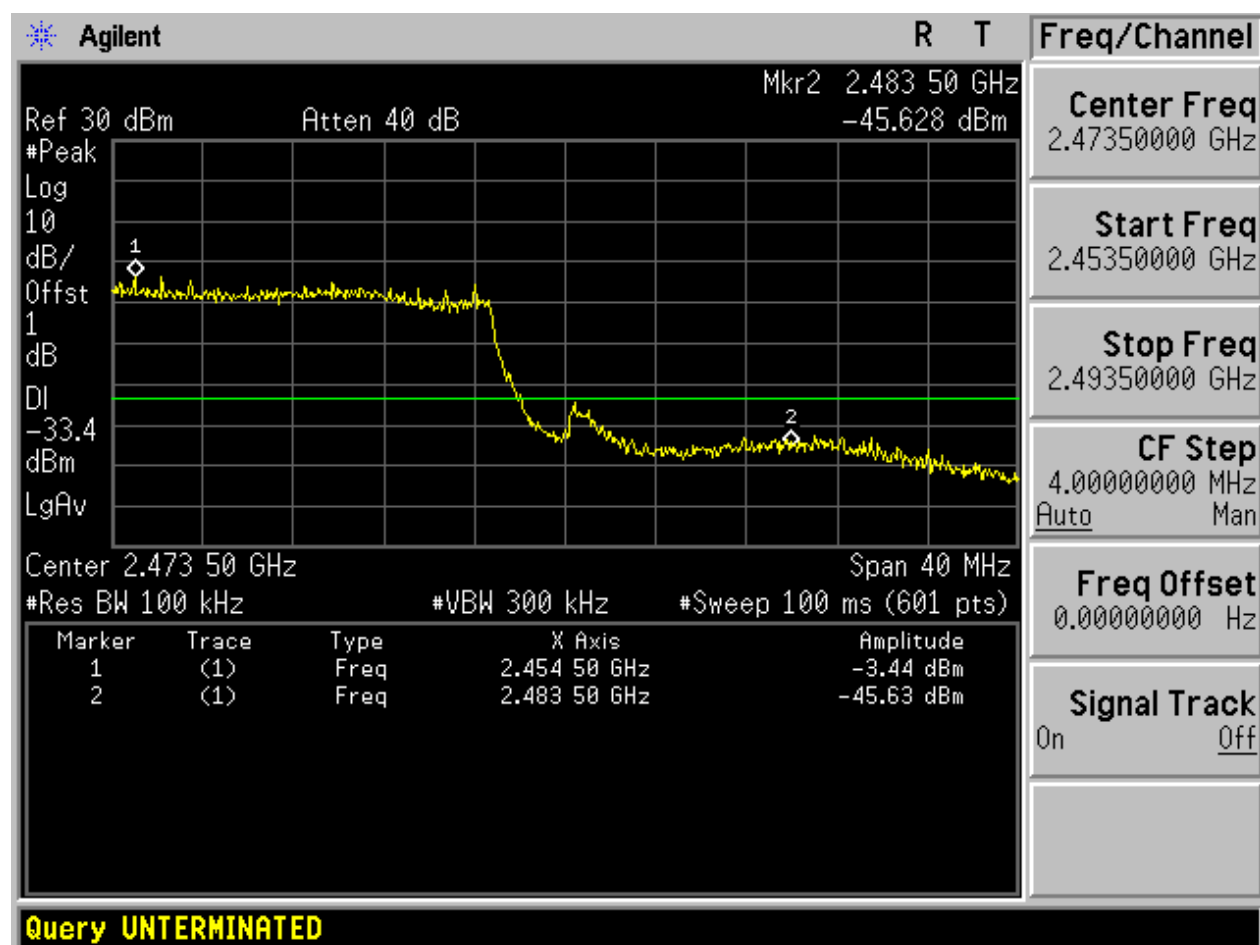

Appendix F: Unwanted Emissions into Non-Restricted Frequency

Bands

In this Appendix, the "Pref", which is used as the reference level, refers to the peak power level in any 100 kHz bandwidth within the fundamental emission, the "Puw" refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW} [kHz])$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain and used as respective results for each chain, due to the relative-limit requirement.

In the result table, the "< Limit" denotes that "The Puw [dBm] is less than Pref[dBm]-30[dBm], see test plots for detailed".

Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	Ant	Pref[dBm]	Puw[dBm]	Verdict
11B	L	2412	Ant 1	7.9	<limit	pass
11B	L	2412	Ant 2	9.03	<limit	pass
11B	M	2437	Ant 1	8.75	<limit	pass
11B	M	2437	Ant 2	9.56	<limit	pass
11B	H	2462	Ant 1	7.72	<limit	pass
11B	H	2462	Ant 2	8.5	<limit	pass
11G	L	2412	Ant 1	0.99	<limit	pass
11G	L	2412	Ant 2	2.94	<limit	pass
11G	M	2437	Ant 1	2.34	<limit	pass
11G	M	2437	Ant 2	3.26	<limit	pass
11G	H	2462	Ant 1	1.85	<limit	pass
11G	H	2462	Ant 2	2.62	<limit	pass
11N20	L	2412	Ant 1	-0.92	<limit	pass
11N20	L	2412	Ant 2	0.55	<limit	pass
11N20	M	2437	Ant 1	-0.86	<limit	pass
11N20	M	2437	Ant 2	0.53	<limit	pass
11N20	H	2462	Ant 1	-1.34	<limit	pass

Test Mode	Test Channel	Frequency[MHz]	Ant	Pref[dBm]	Puw[dBm]	Verdict
11N20	H	2462	Ant 2	-1.1	<limit	pass
11N20m	L	2412	Ant 1	-0.7	<limit	pass
11N20m	L	2412	Ant 2	0.31	<limit	pass
11N20m	M	2437	Ant 1	-0.34	<limit	pass
11N20m	M	2437	Ant 2	0.11	<limit	pass
11N20m	H	2462	Ant 1	-1.03	<limit	pass
11N20m	H	2462	Ant 2	-0.47	<limit	pass
11N40	L	2422	Ant 1	-3.58	<limit	pass
11N40	L	2422	Ant 2	-2.24	<limit	pass
11N40	M	2437	Ant 1	-4.14	<limit	pass
11N40	M	2437	Ant 2	-3.28	<limit	pass
11N40	H	2452	Ant 1	-4.01	<limit	pass
11N40	H	2452	Ant 2	-3.03	<limit	pass
11N40m	L	2422	Ant 1	-3.37	<limit	pass
11N40m	L	2422	Ant 2	-1.93	<limit	pass
11N40m	M	2437	Ant 1	-4.28	<limit	pass
11N40m	M	2437	Ant 2	-3.05	<limit	pass
11N40m	H	2452	Ant 1	-3.71	<limit	pass
11N40m	H	2452	Ant 2	-2.62	<limit	pass


Part II - Test Plots


2.1 11B_L@Ant 1


Pref:

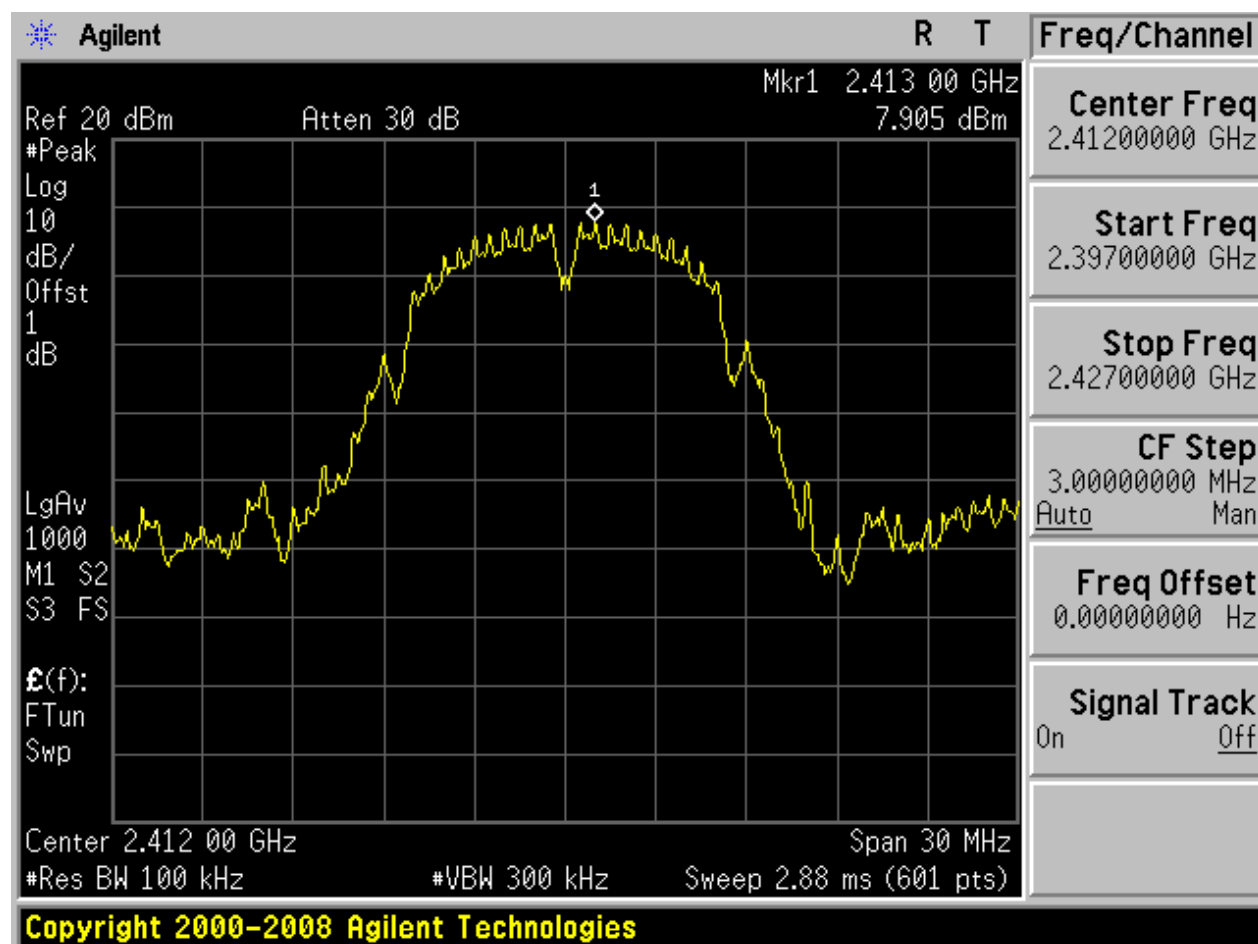



Puw:

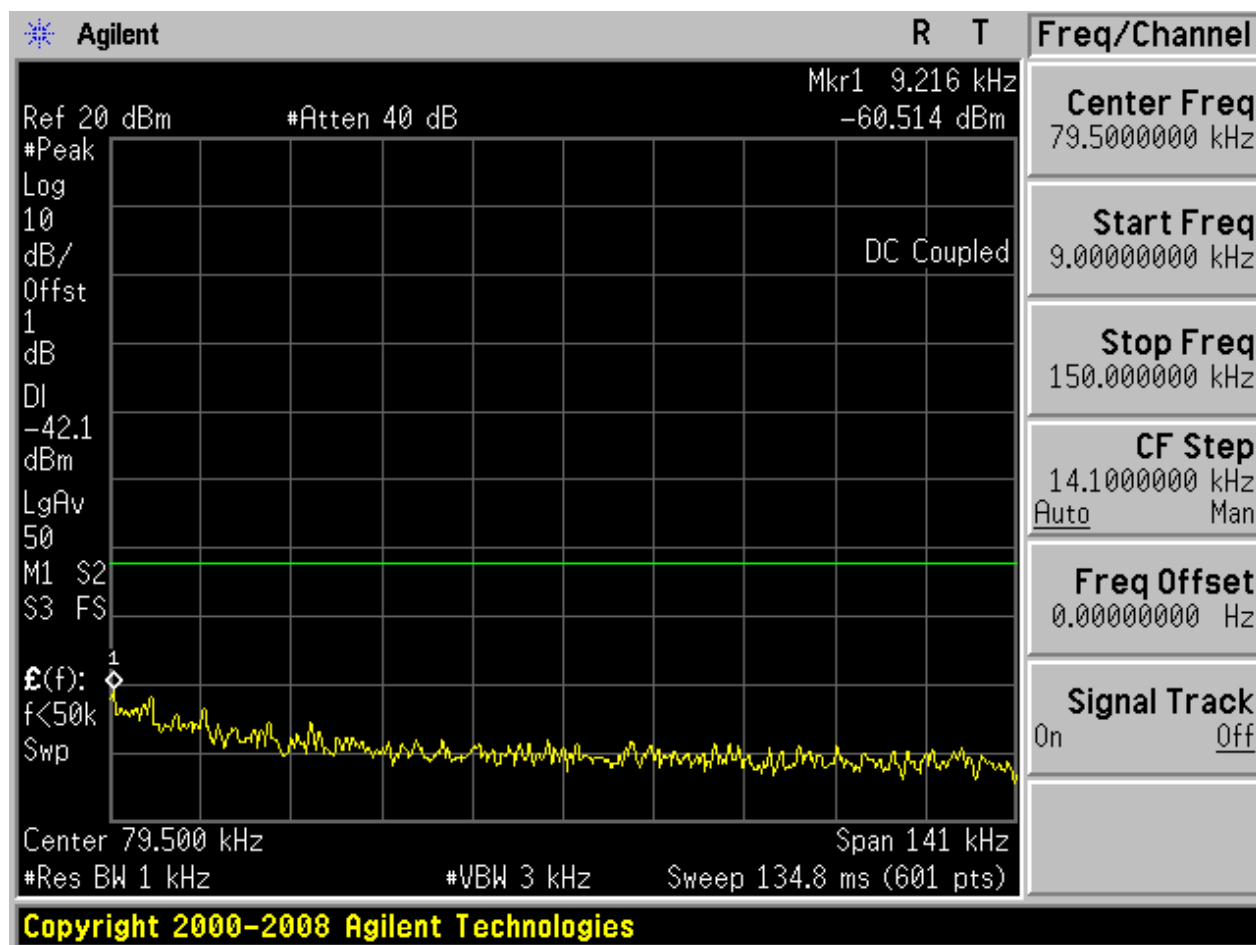


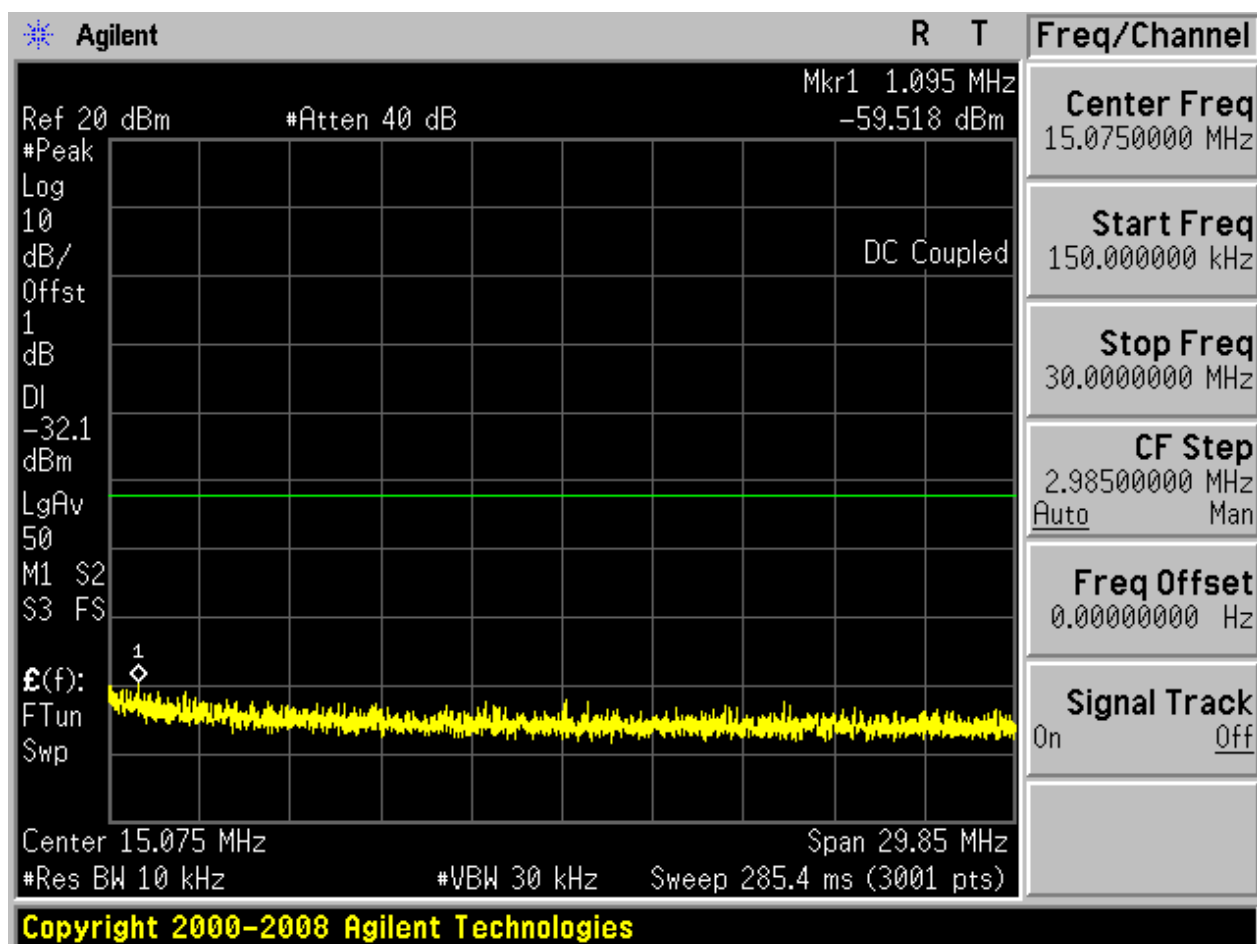

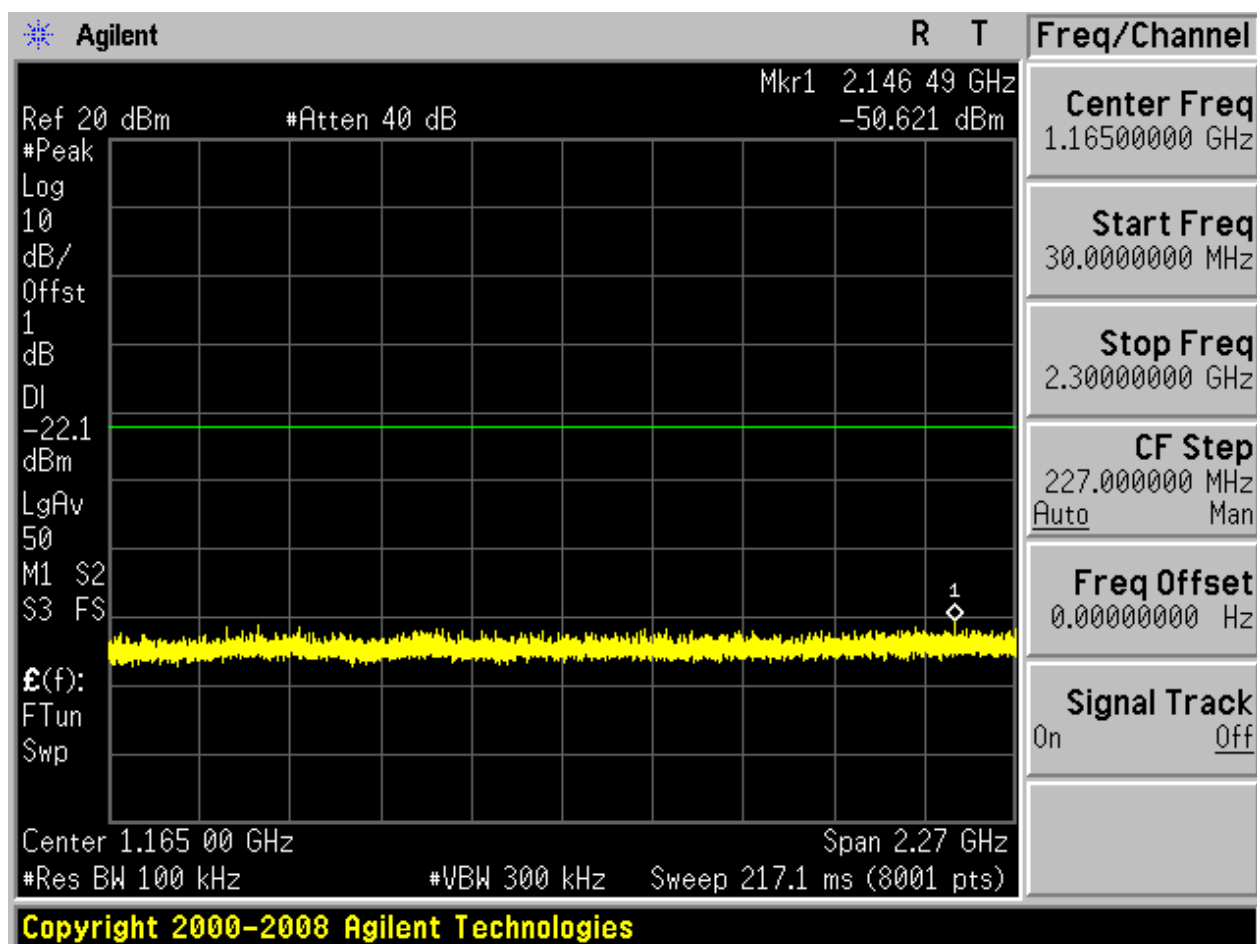

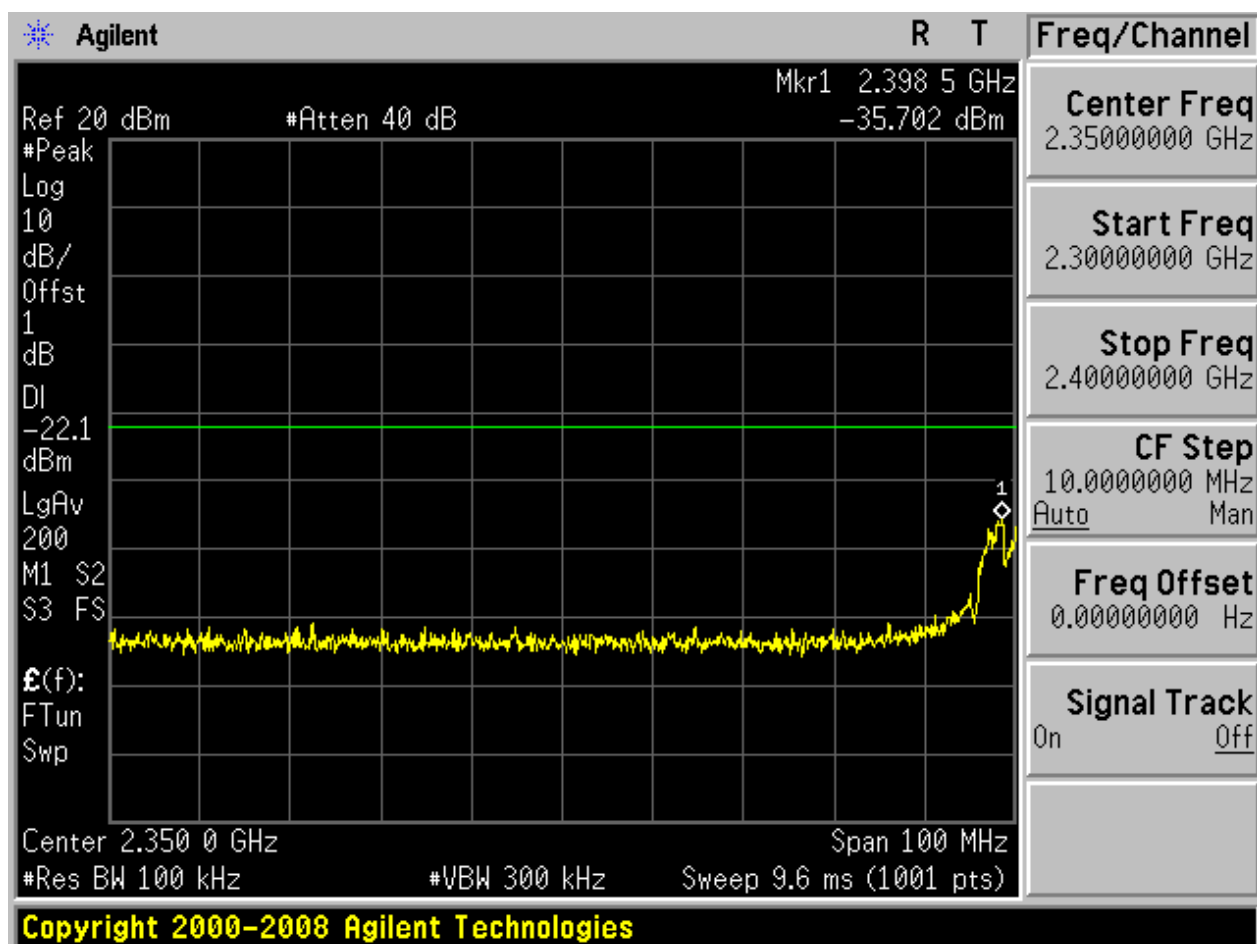


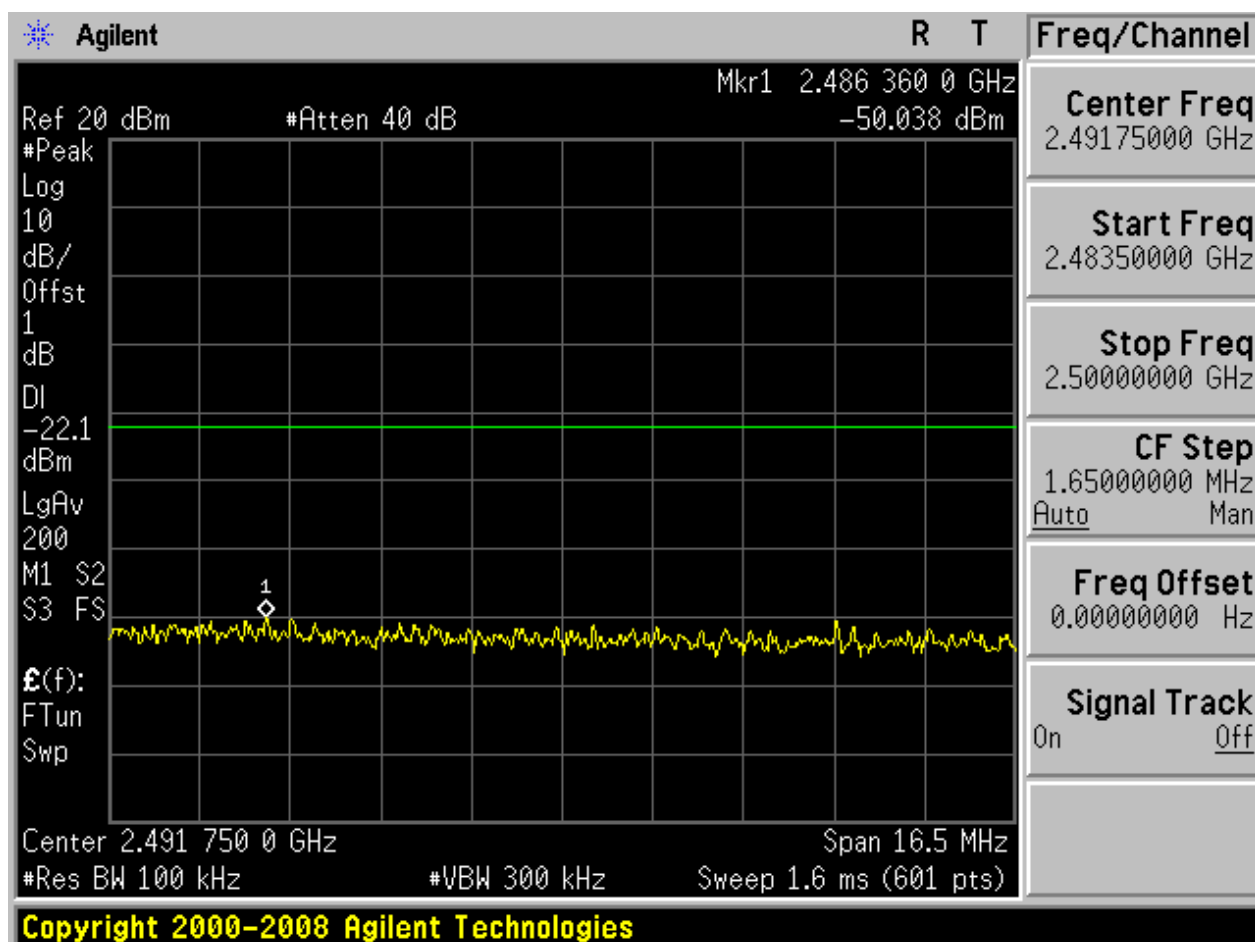

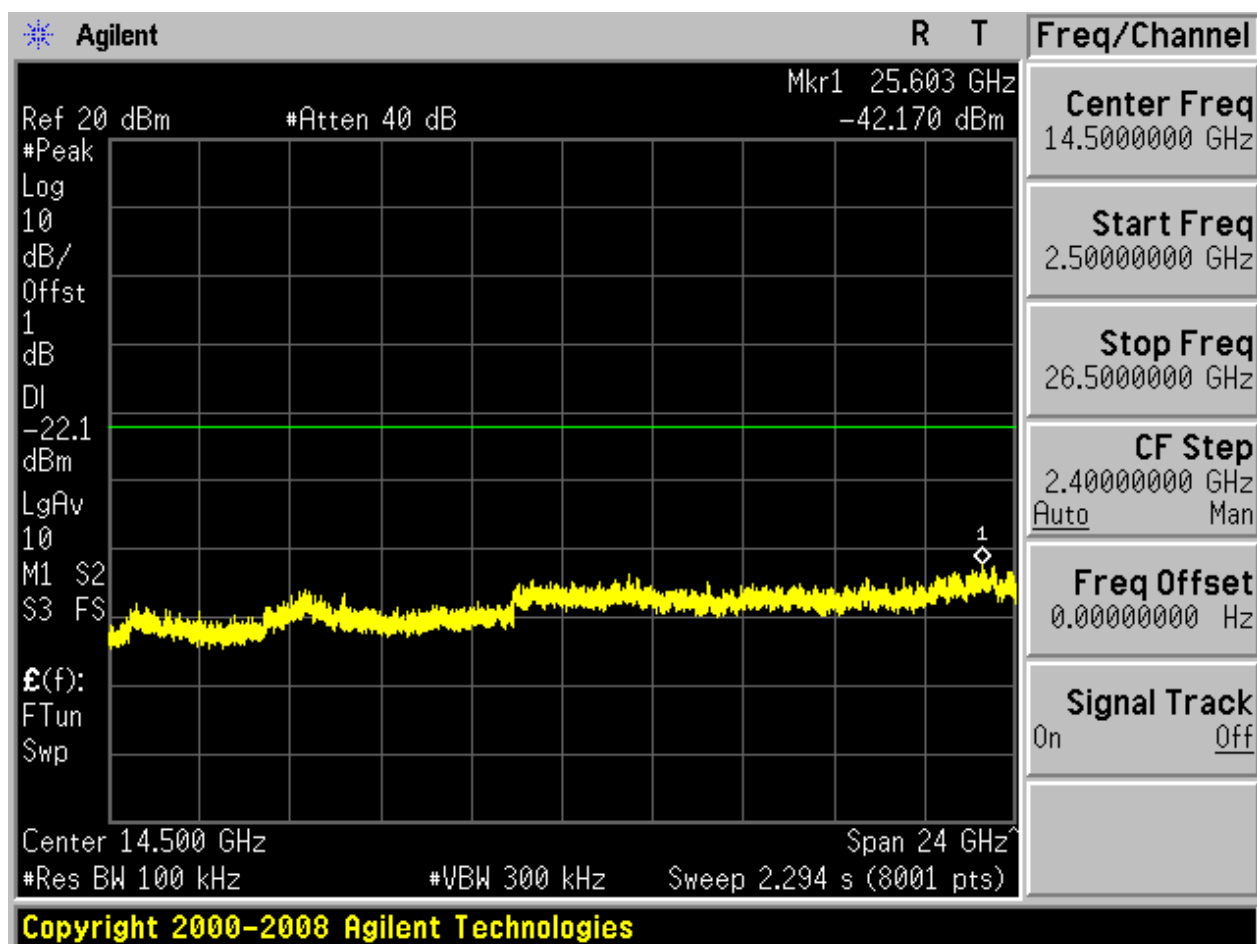


2.2 11B_L@Ant 2


Pref:

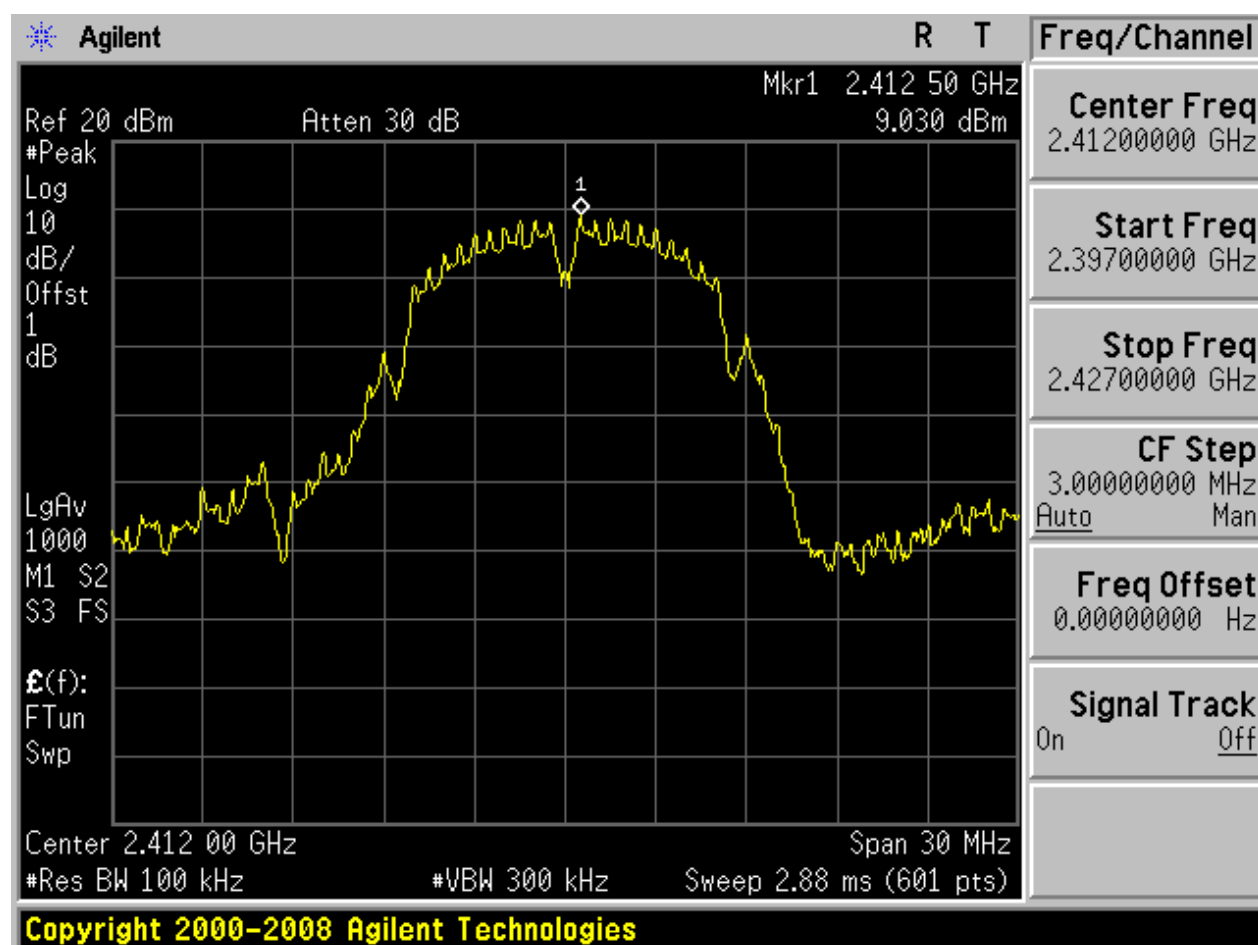






Puw:

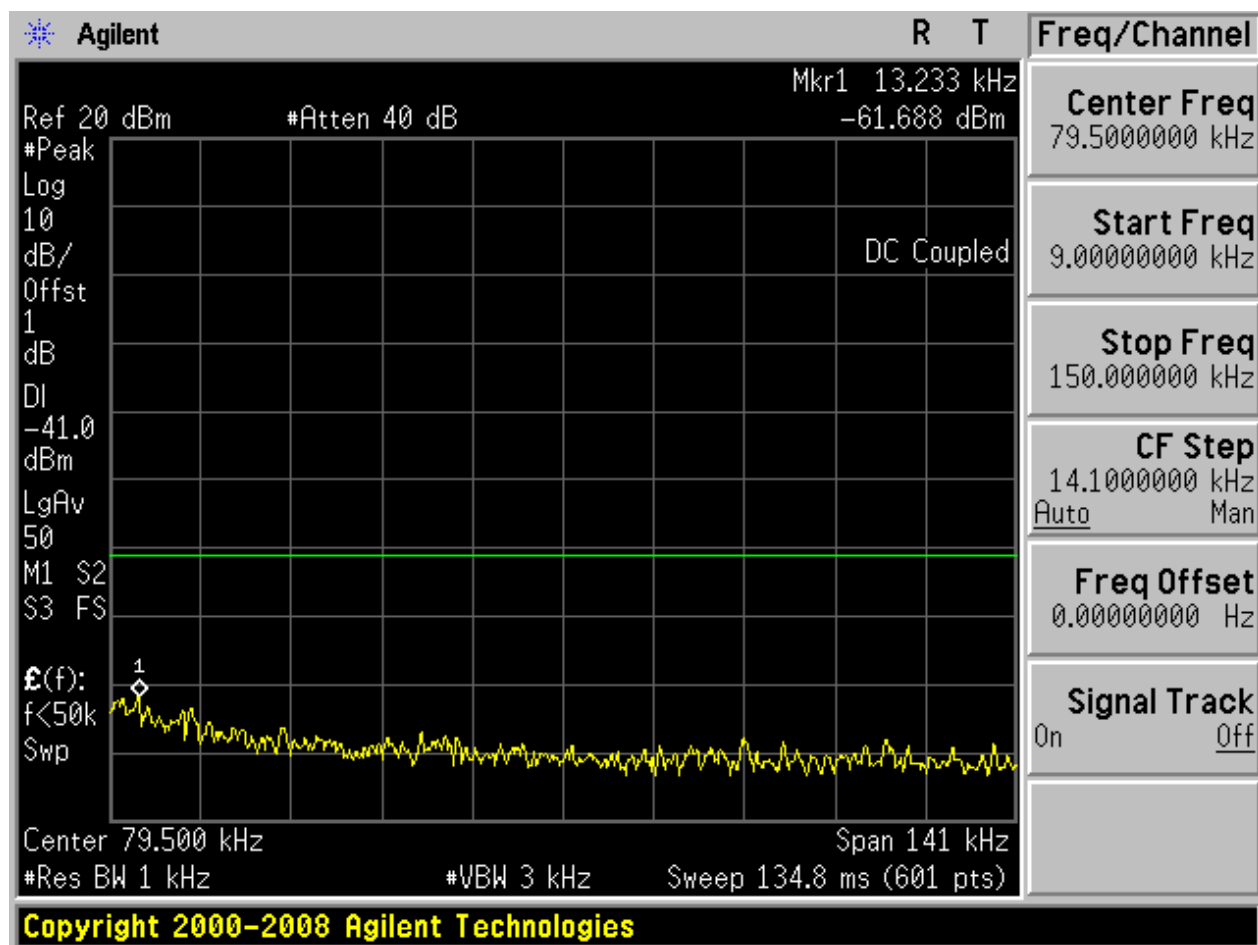


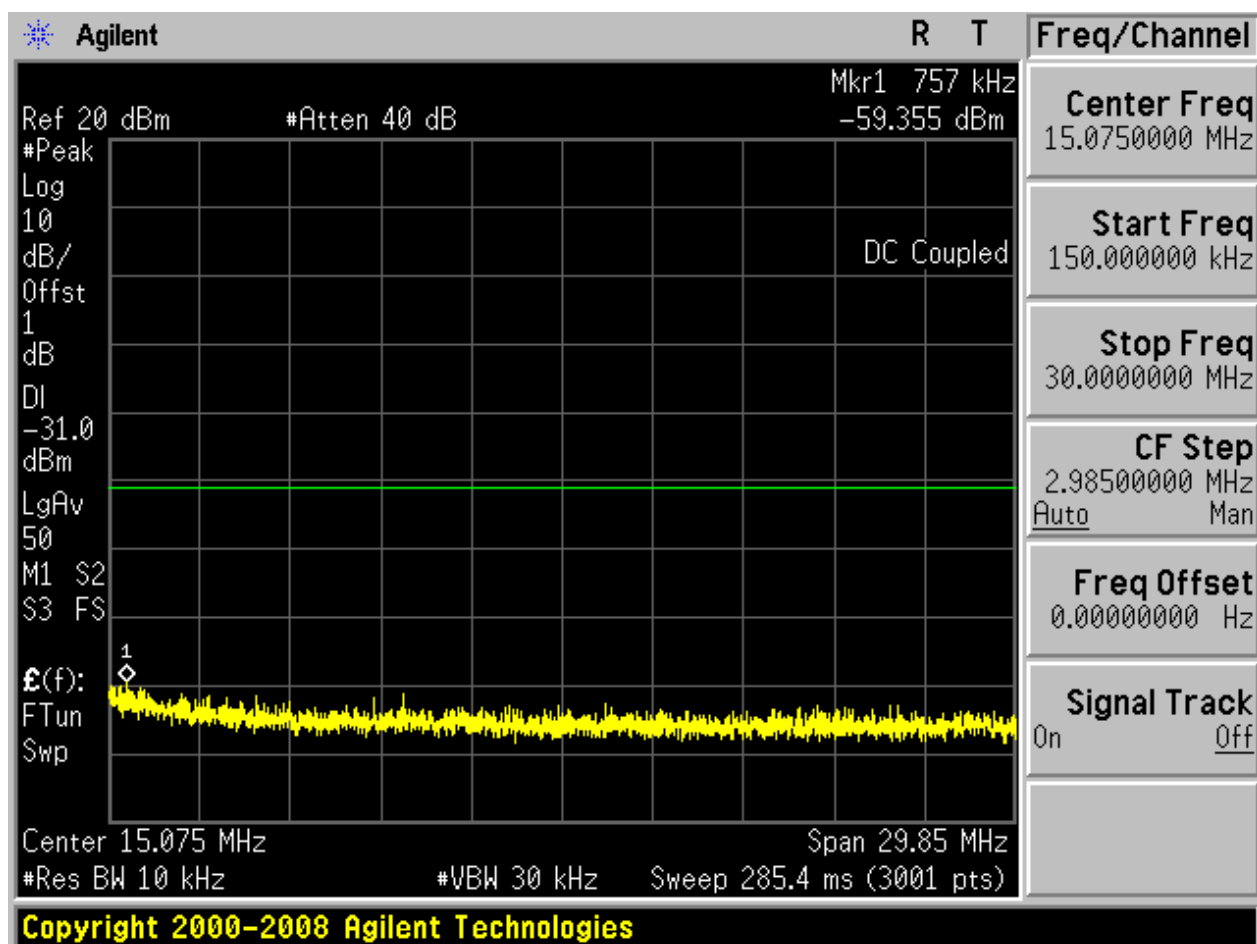

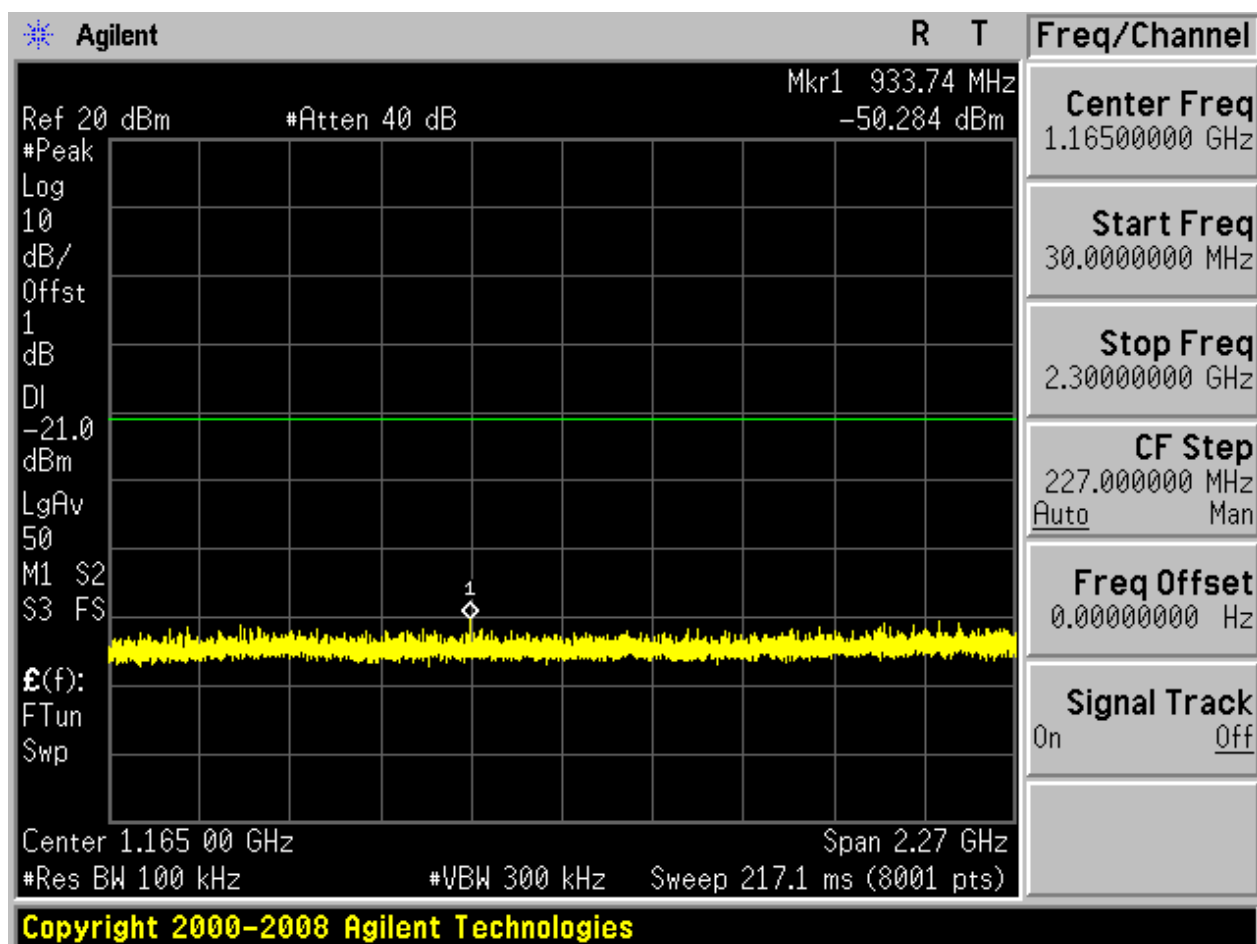

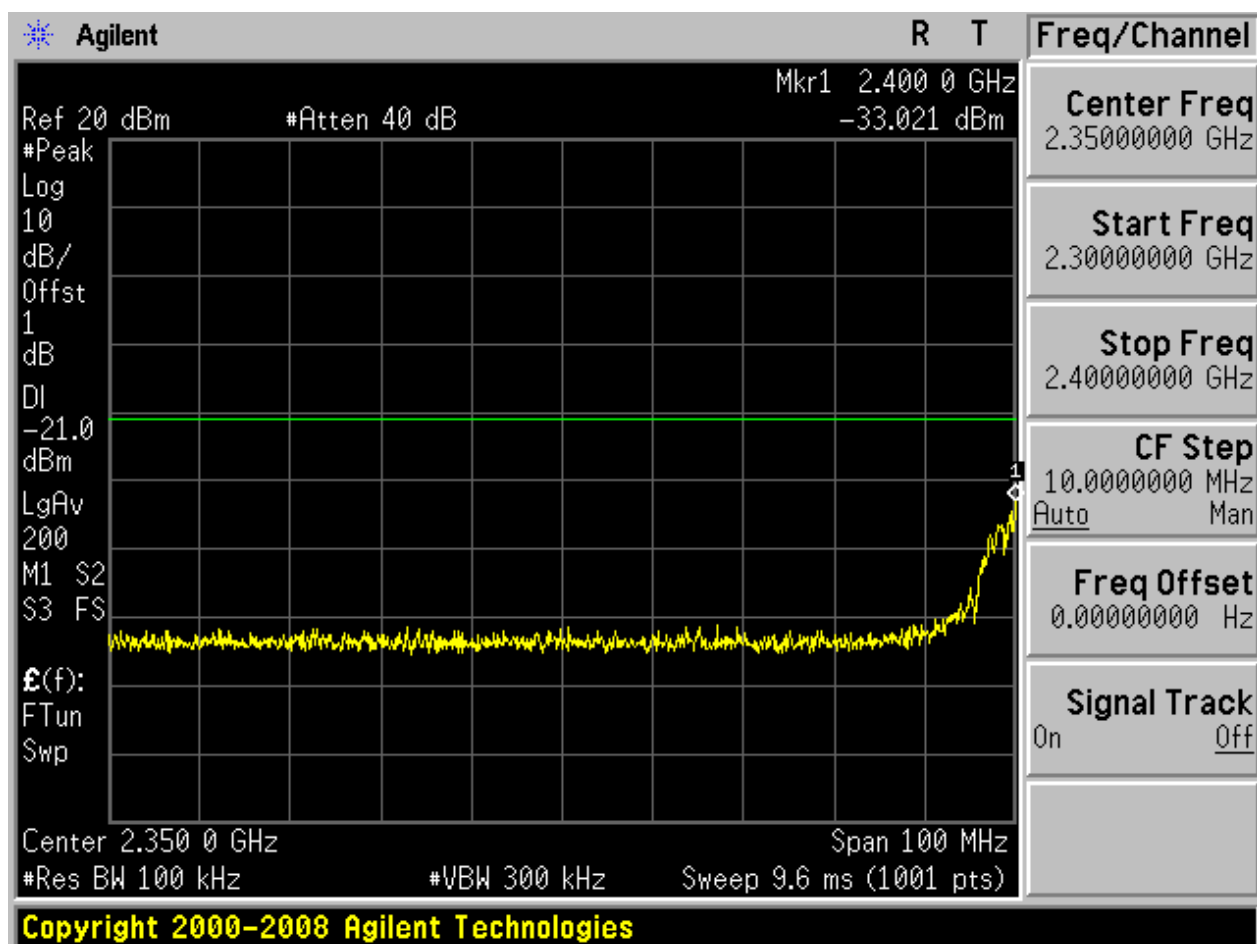


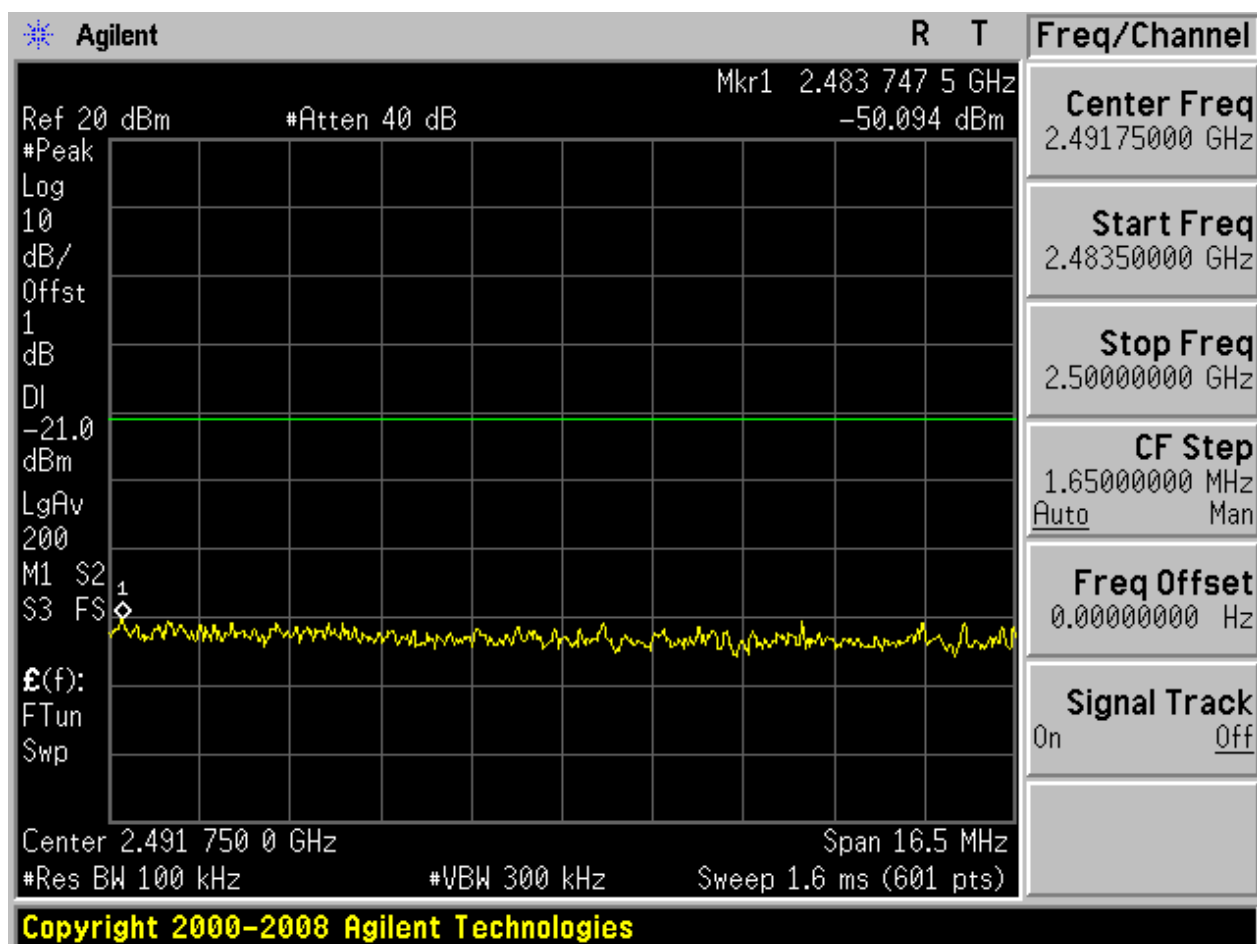

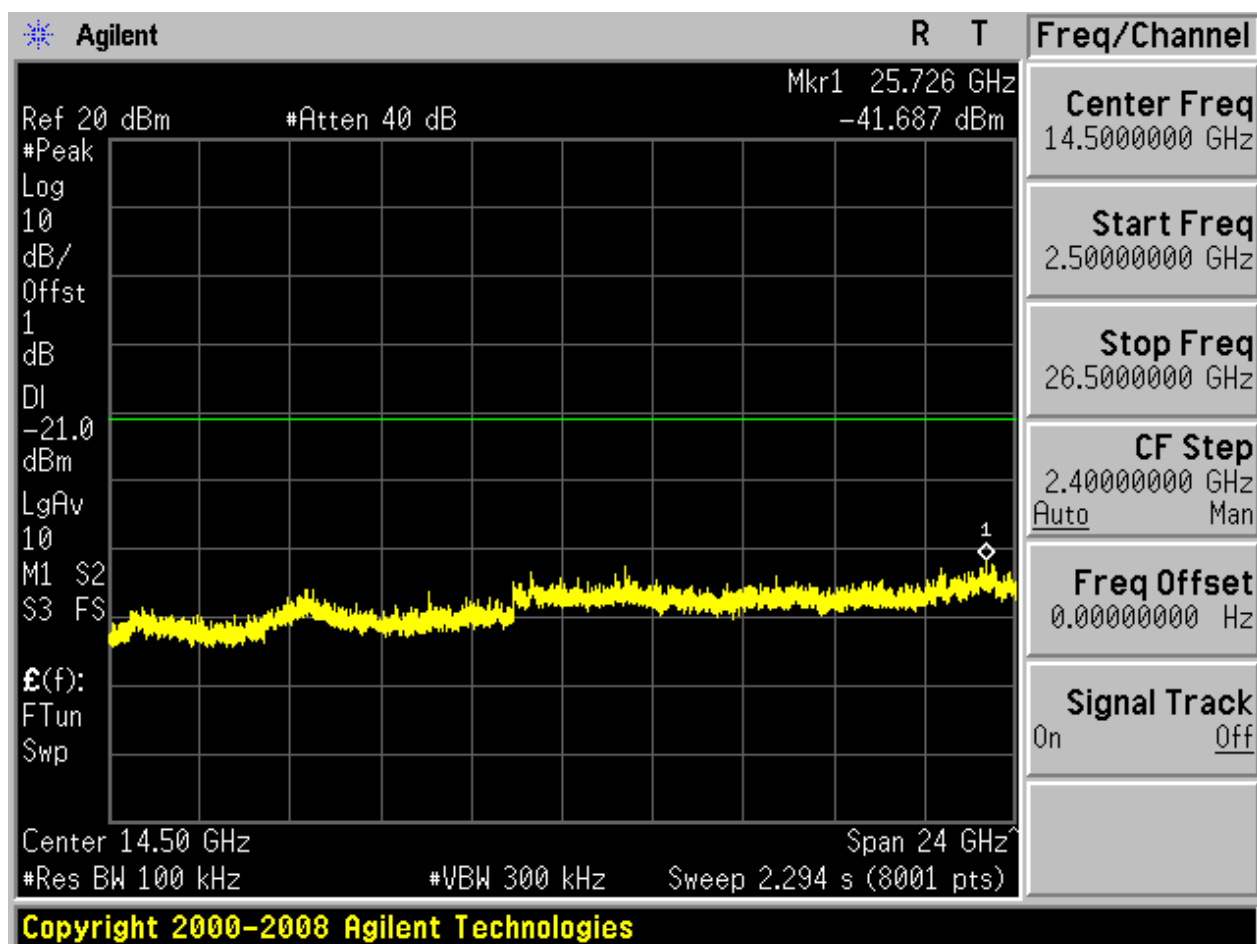


2.3 11B_M@Ant 1


Pref:

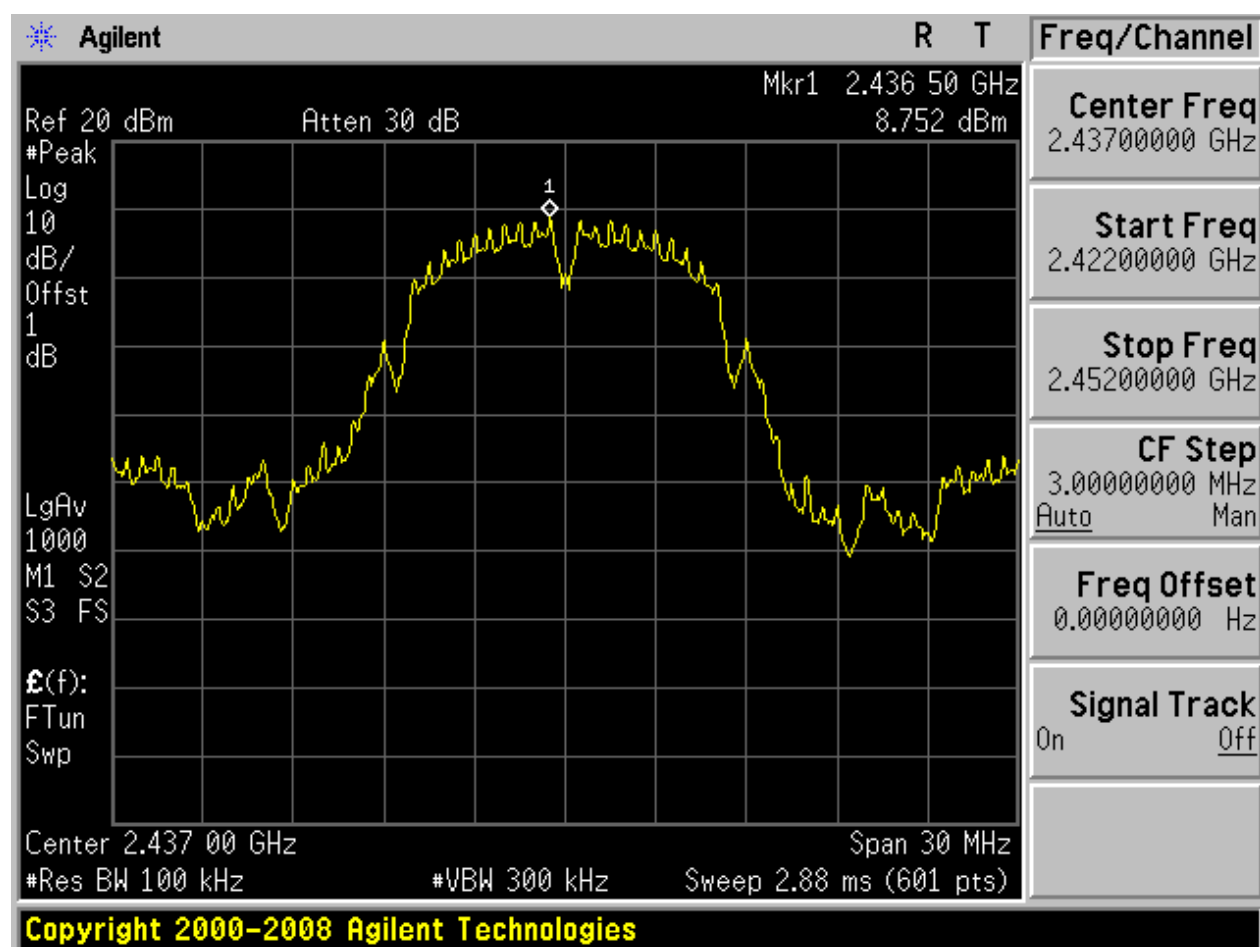






Puw:

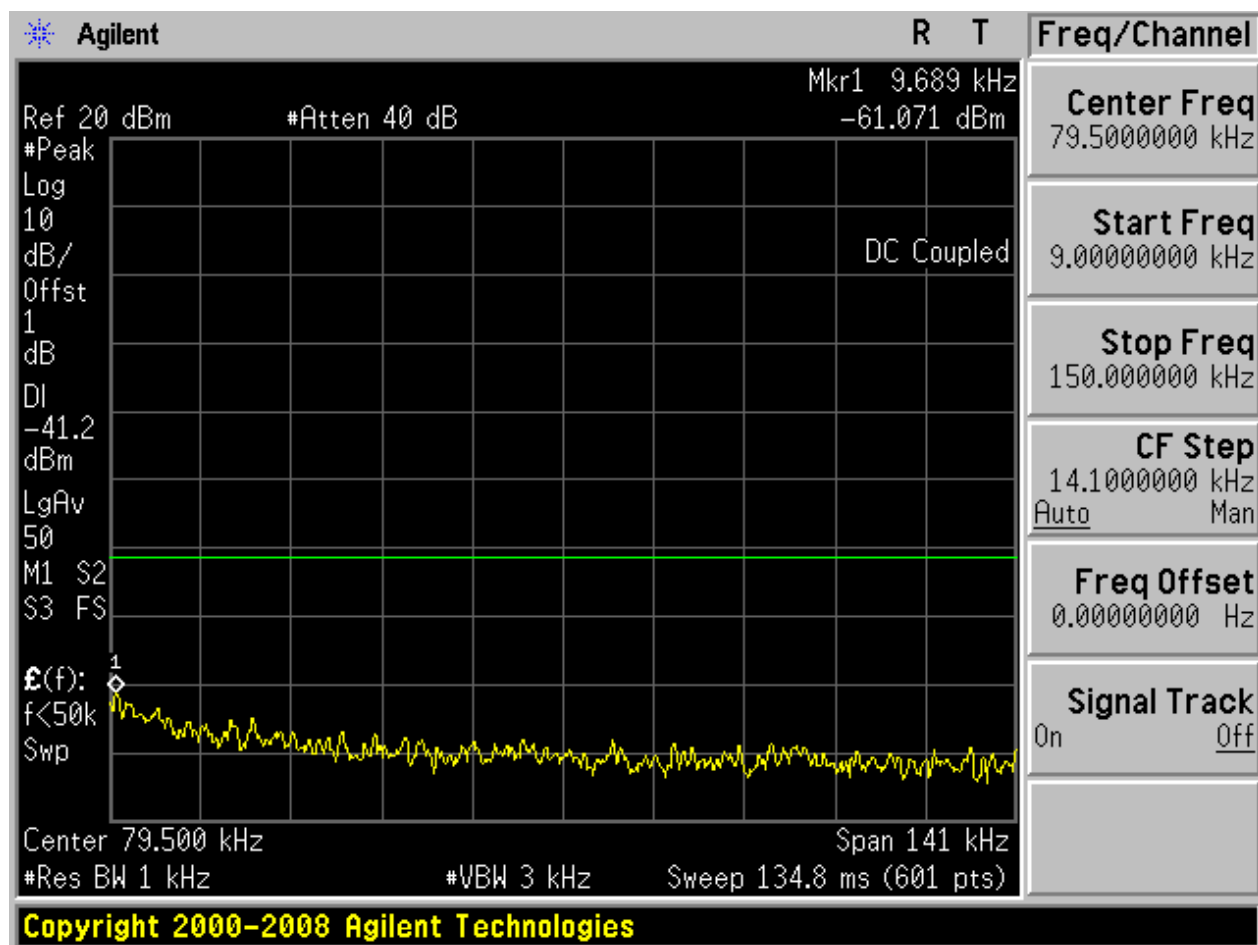


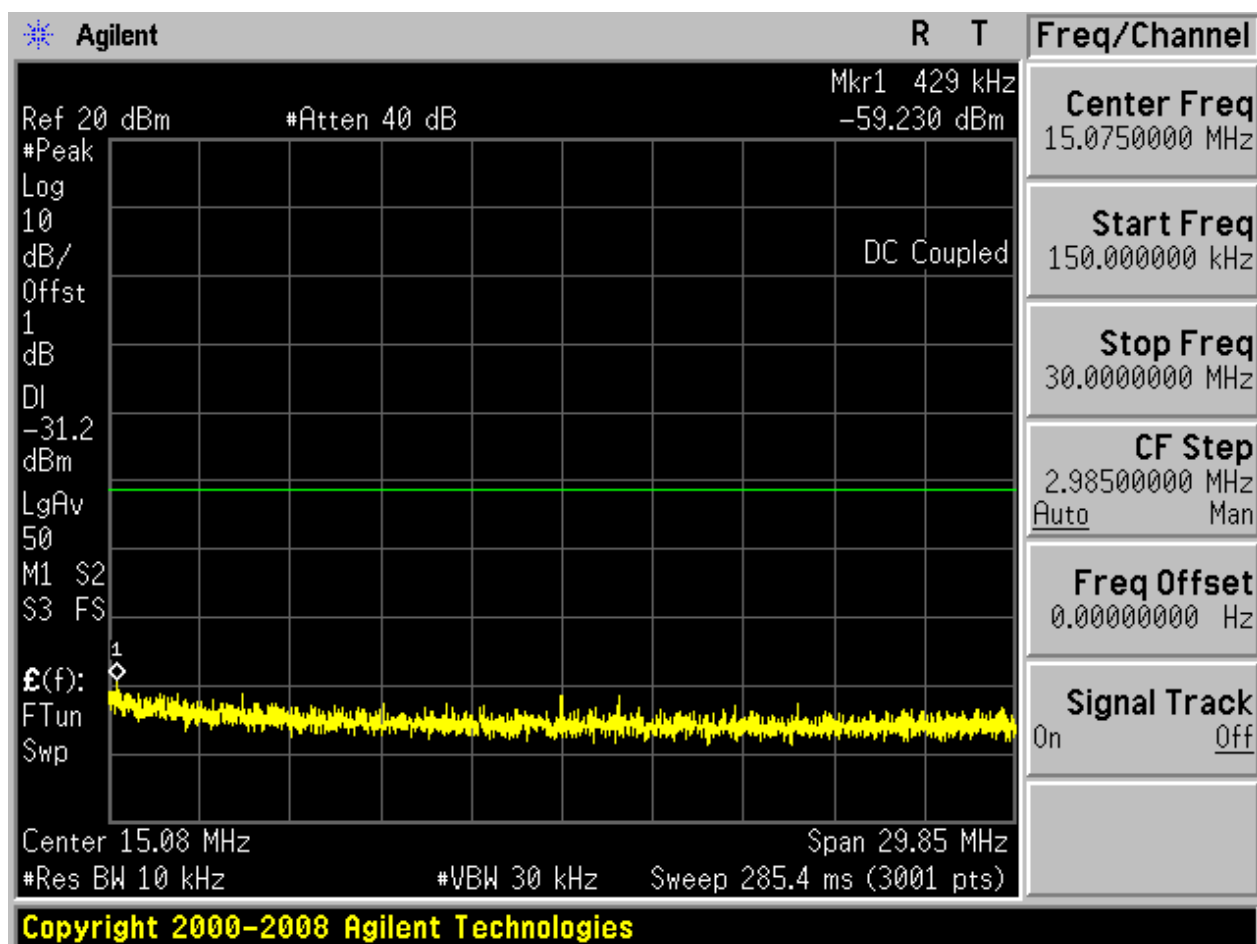

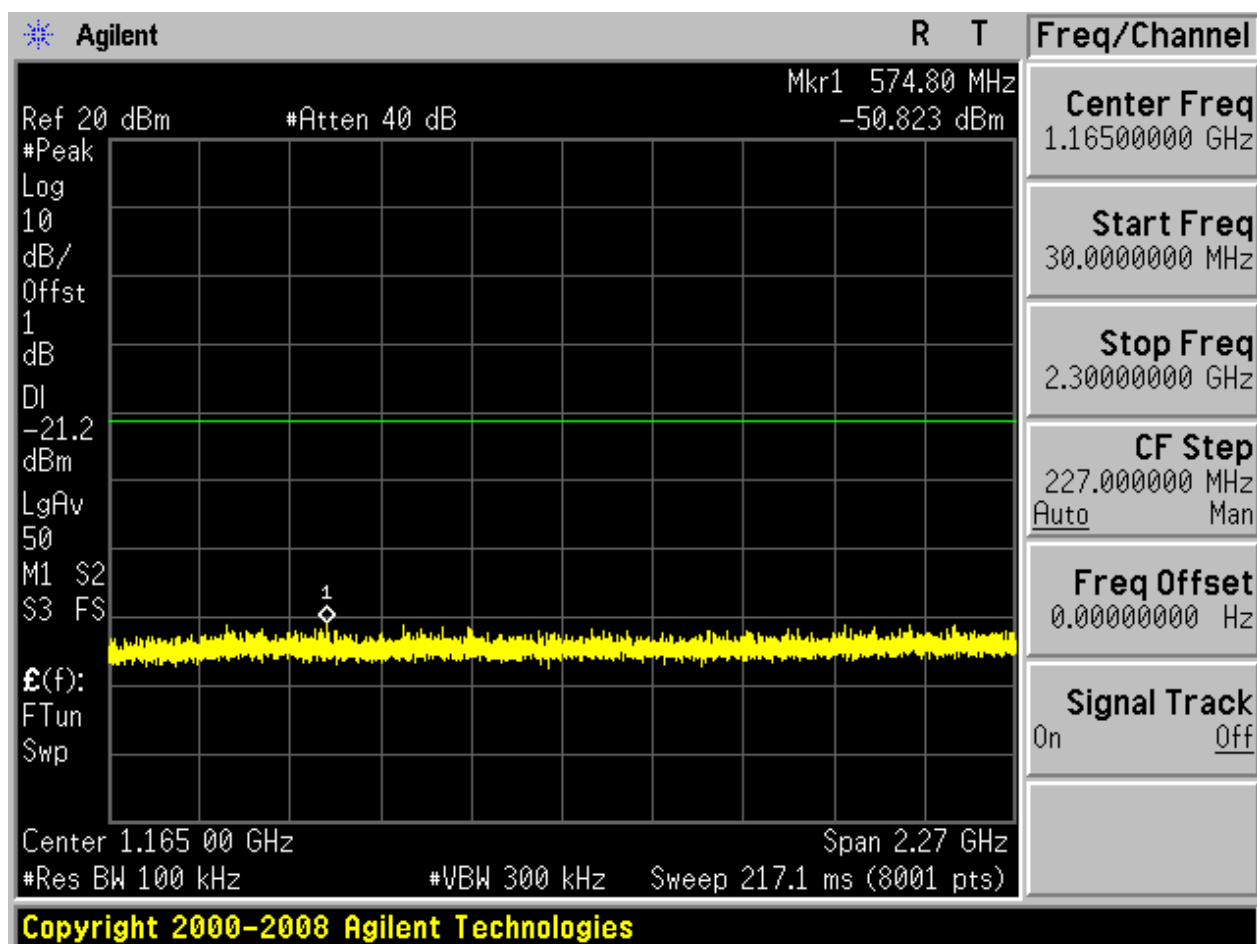

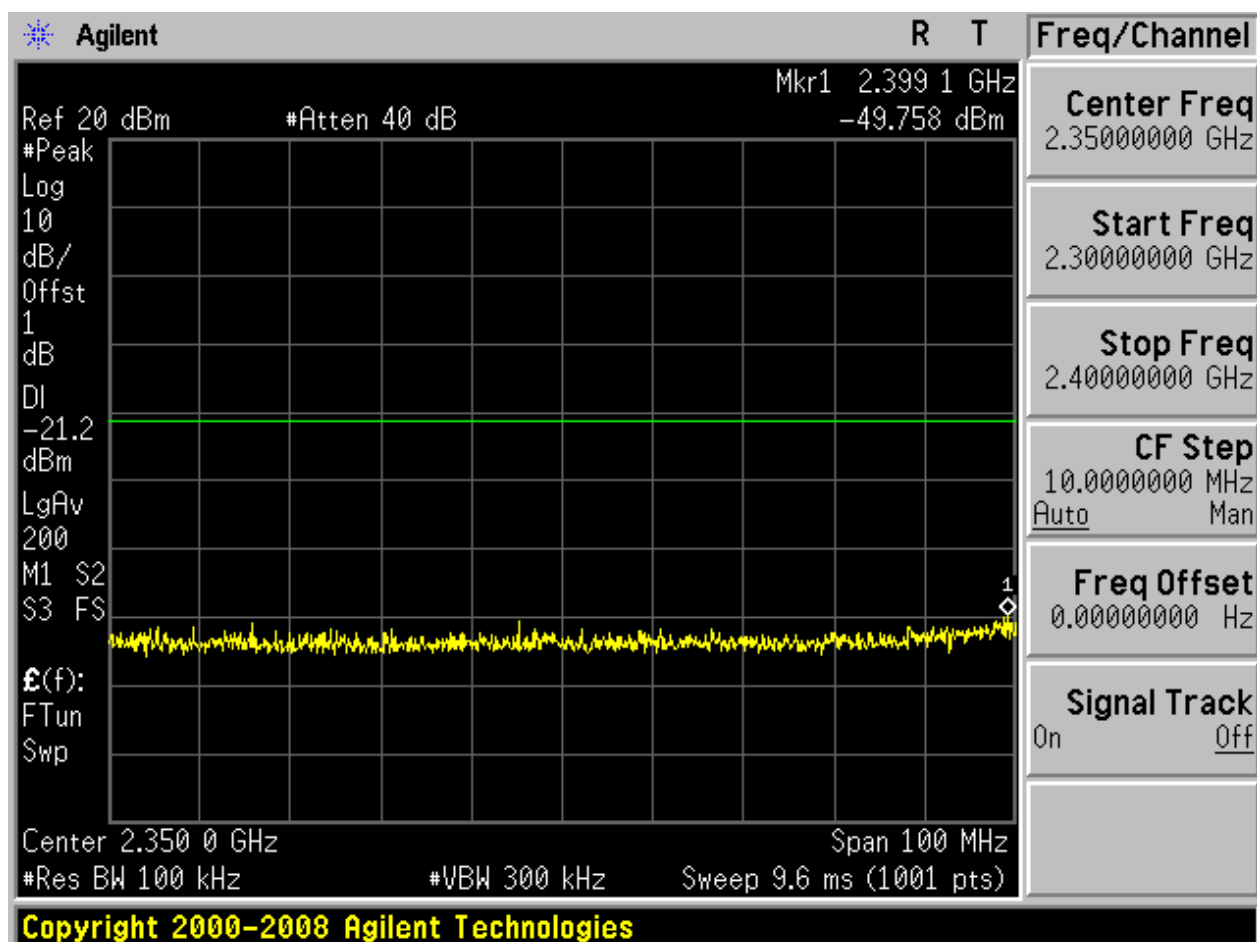


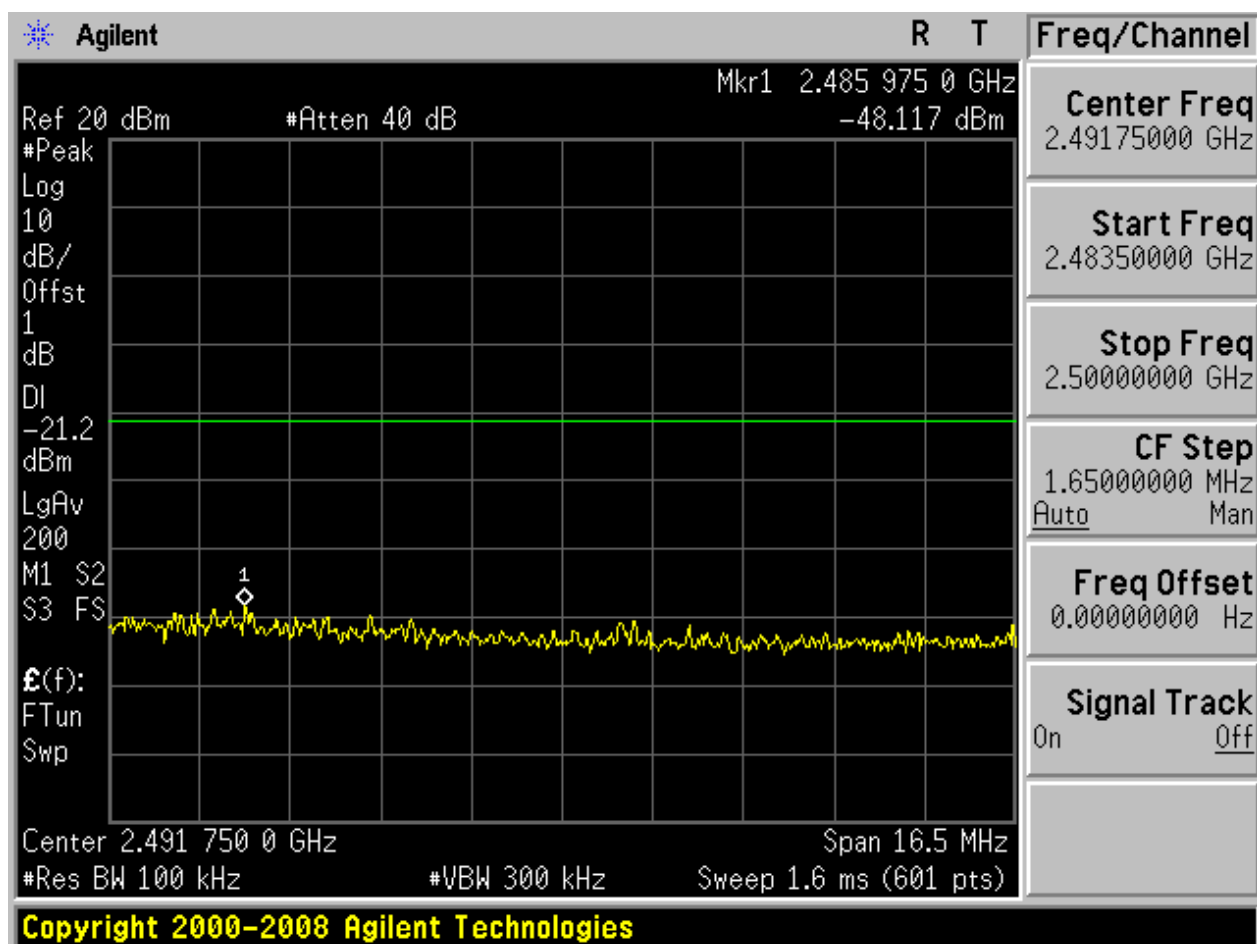

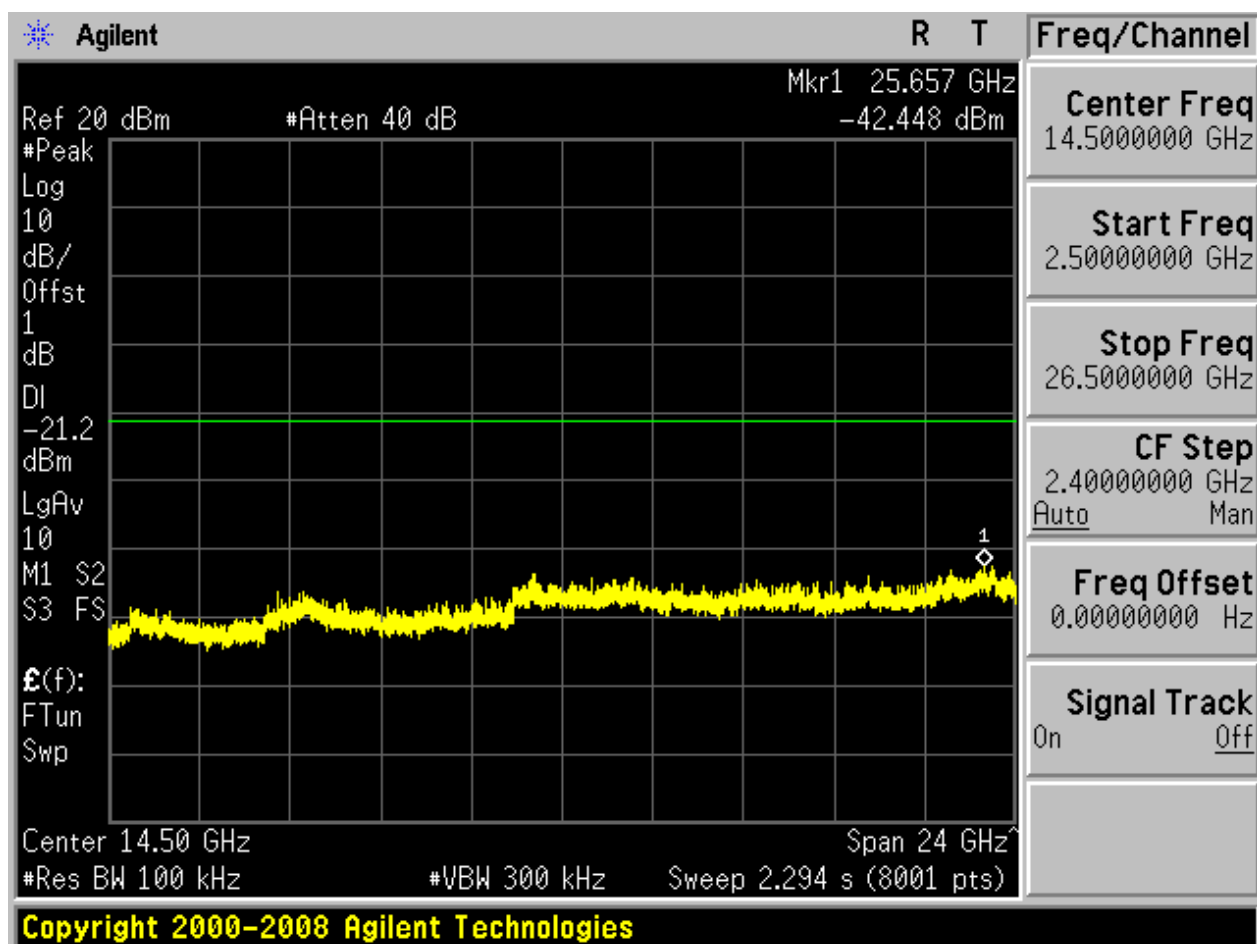



2.4 11B_M@Ant 2


Pref:

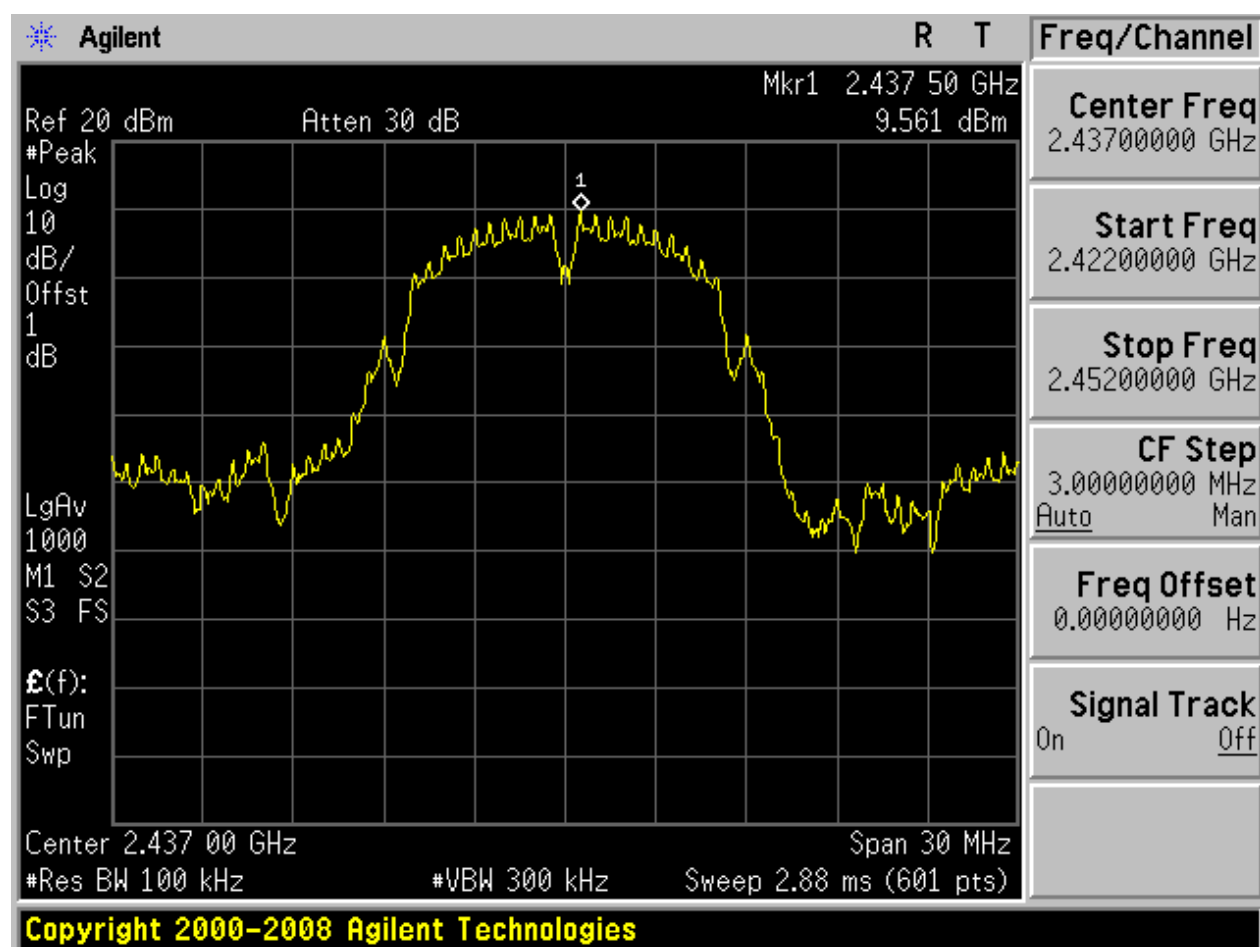



Puw:

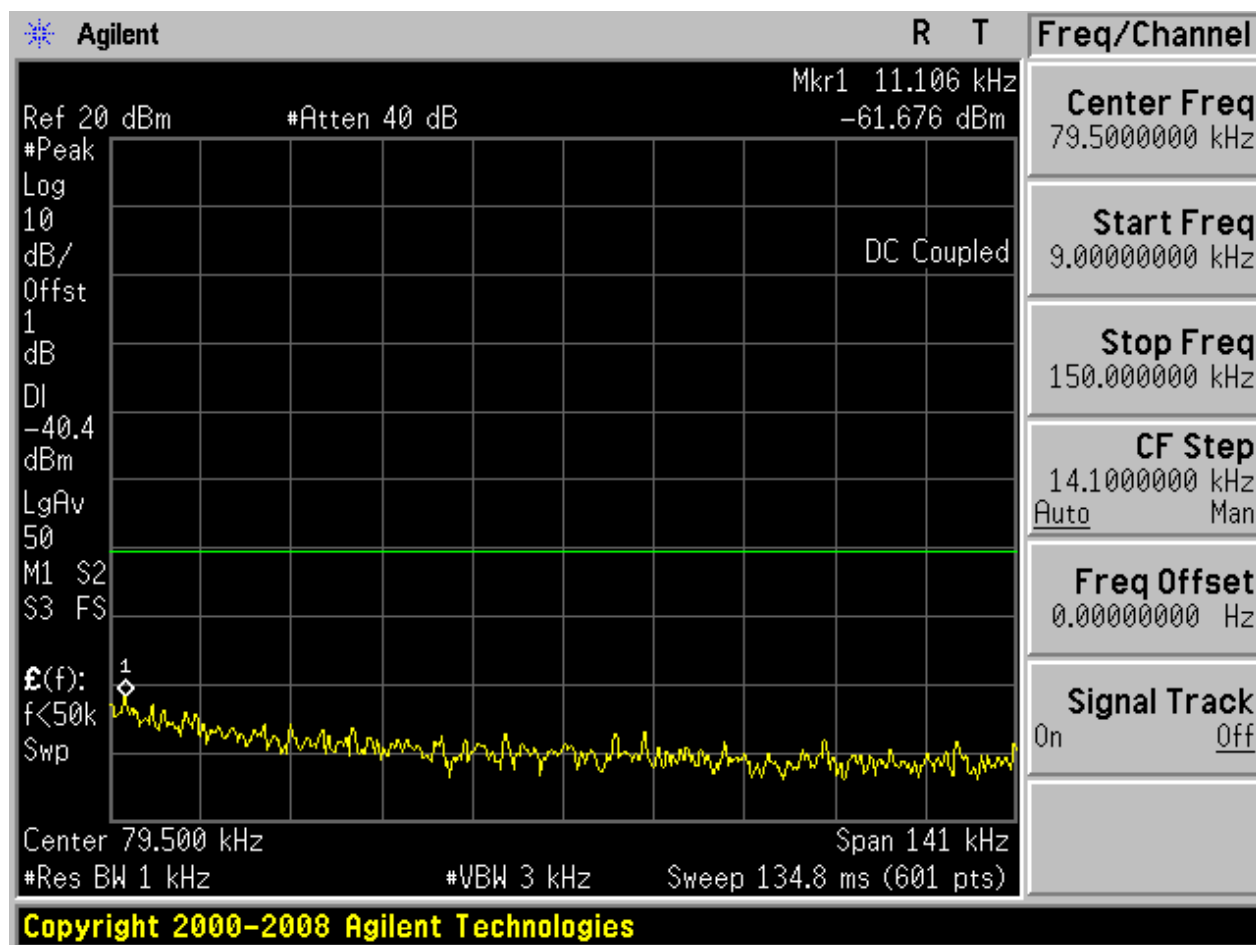


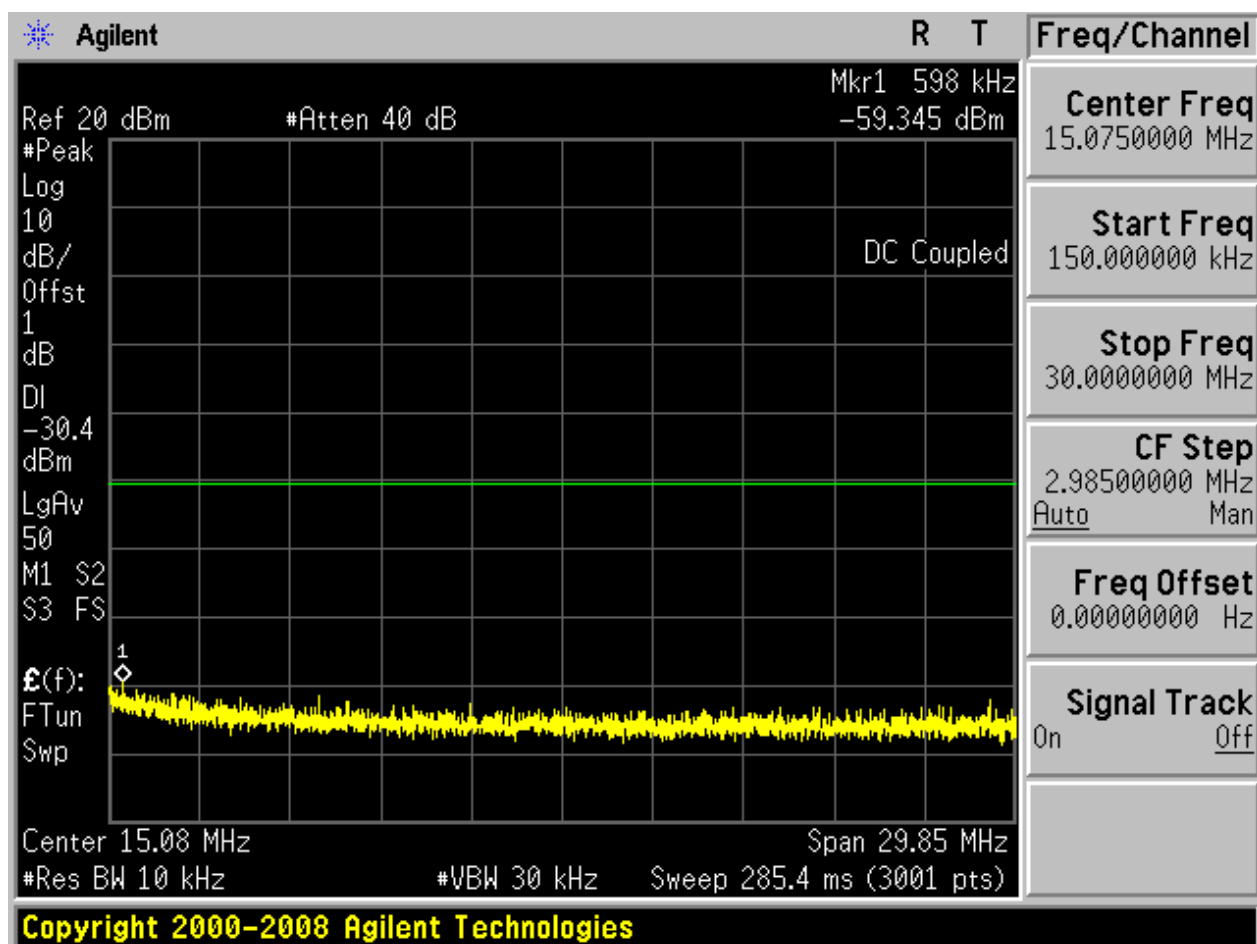

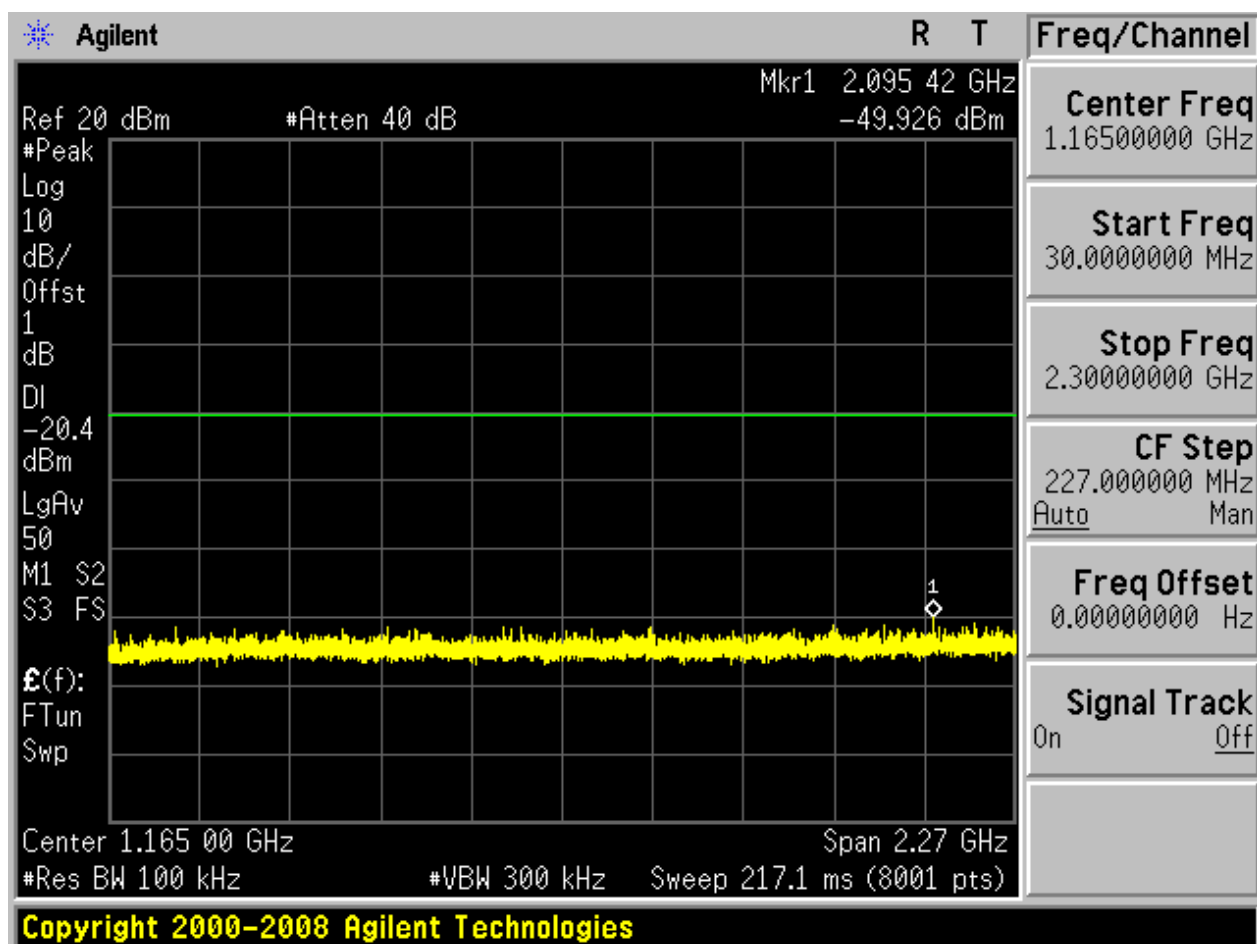

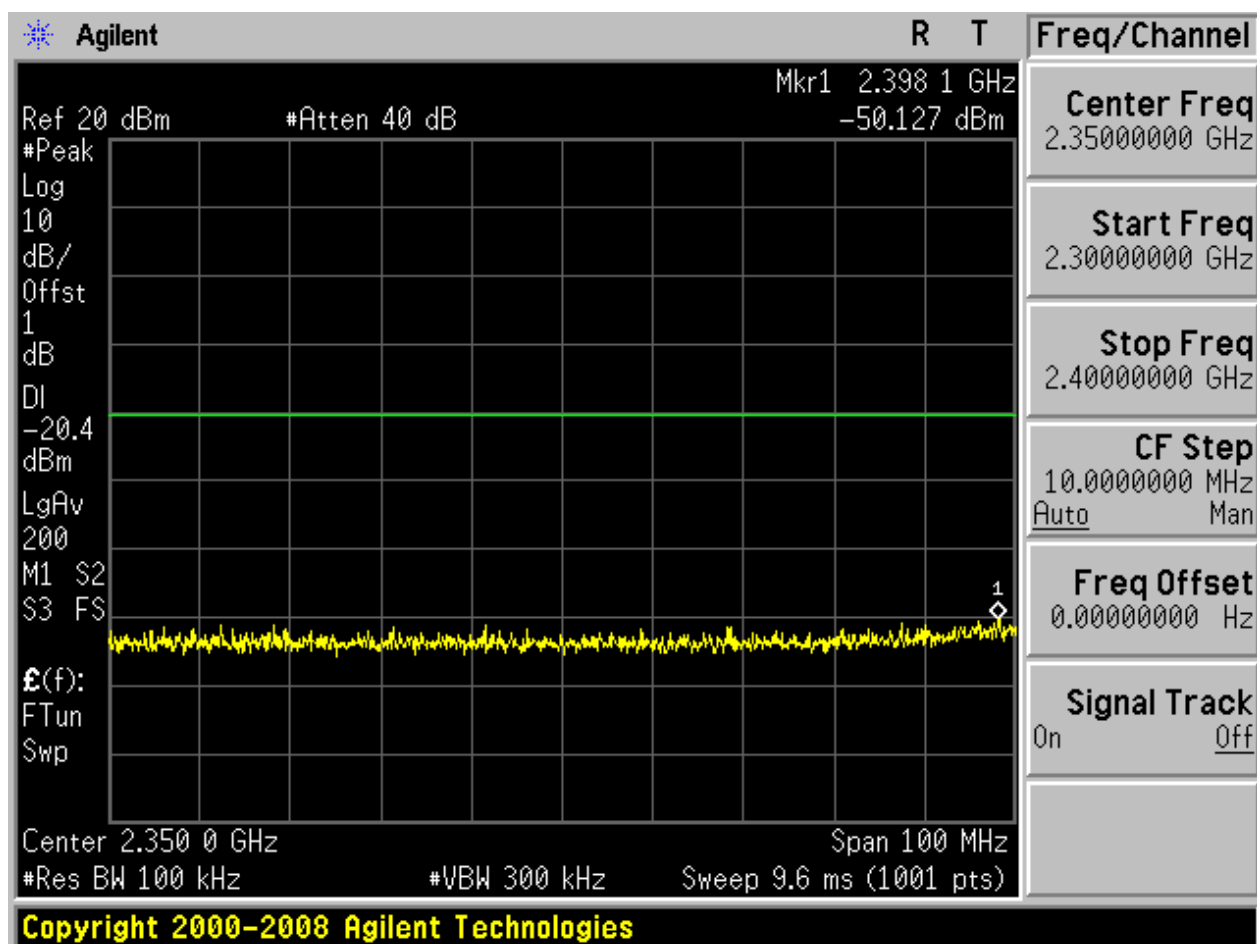


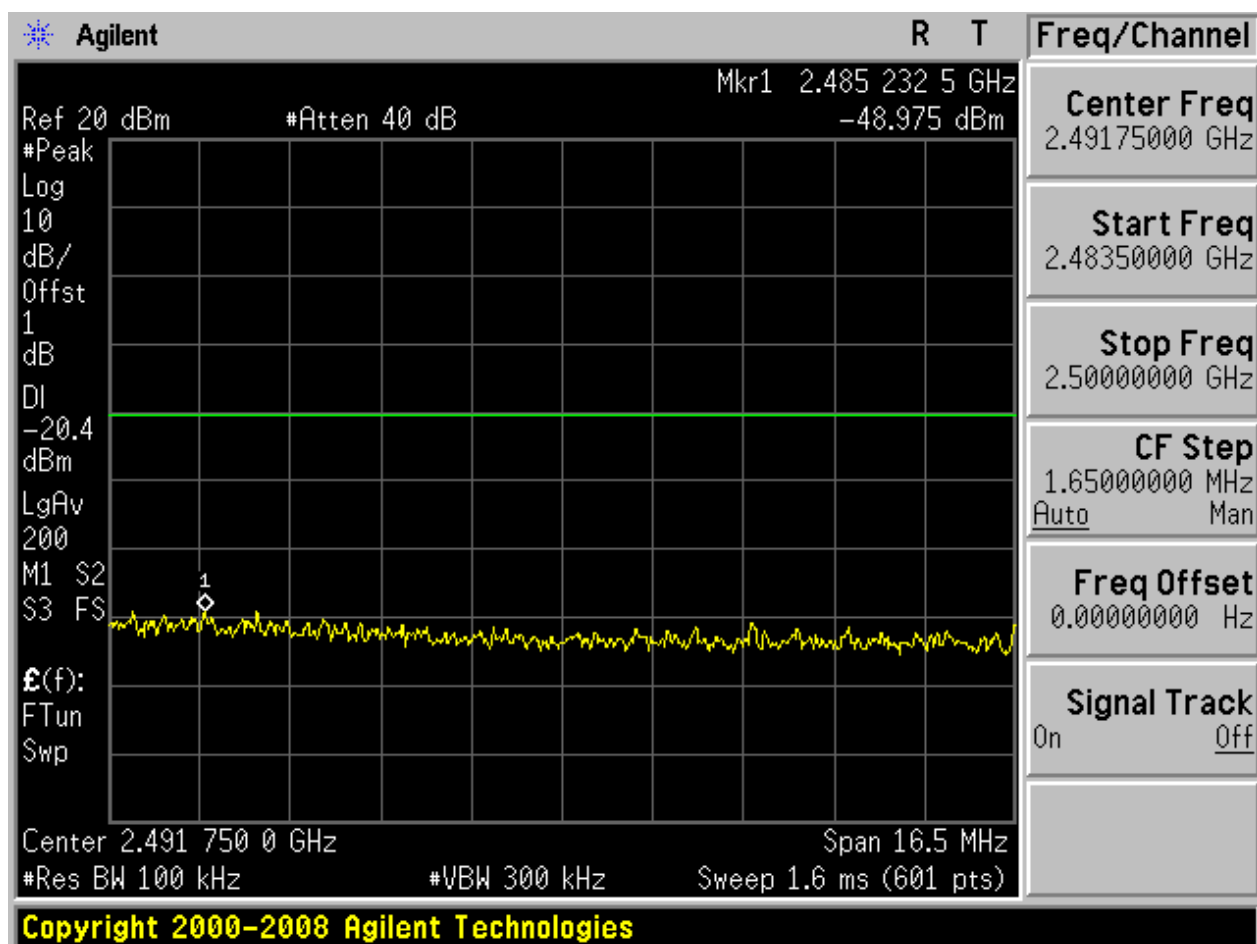

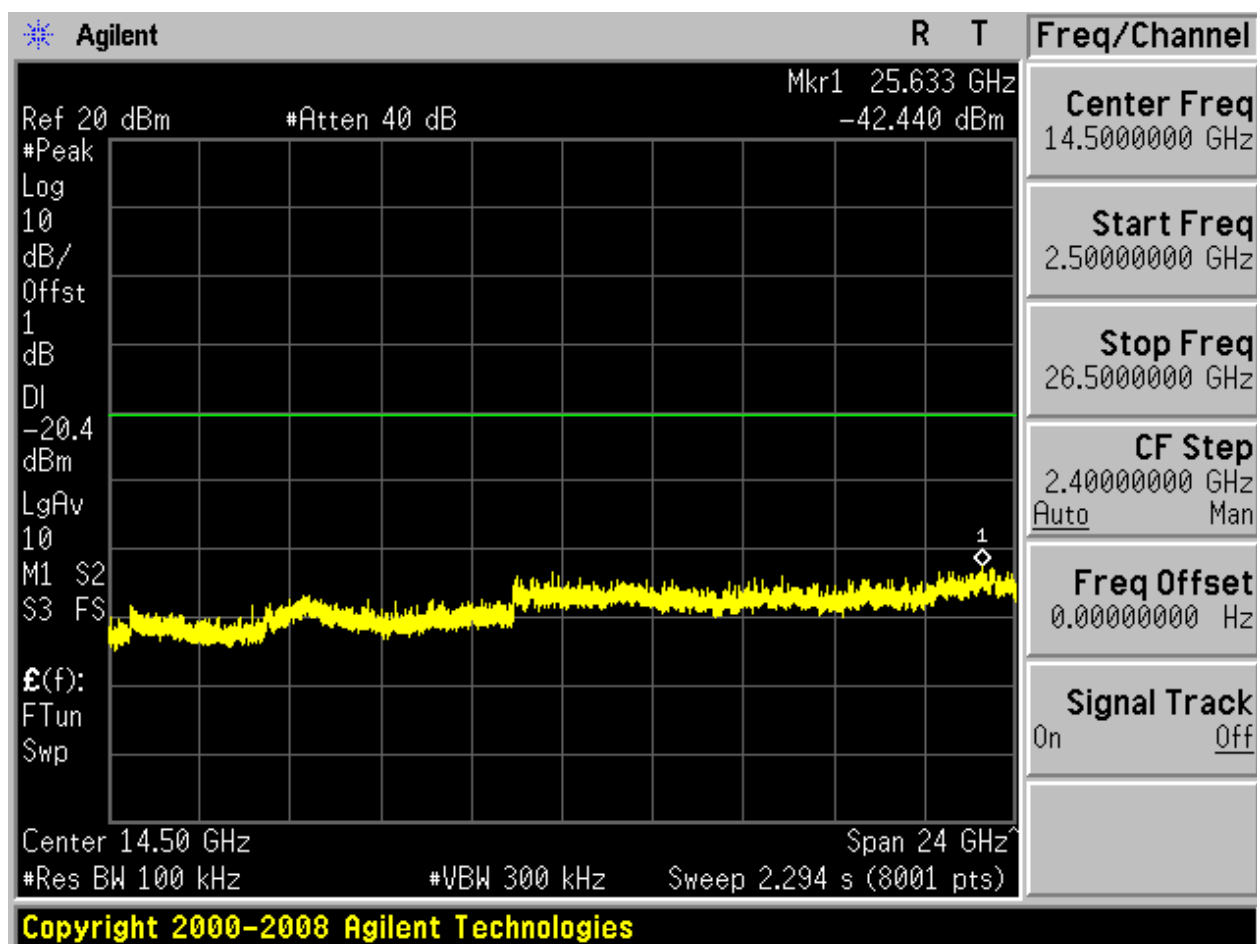



2.5 11B_H@Ant 1


Pref:

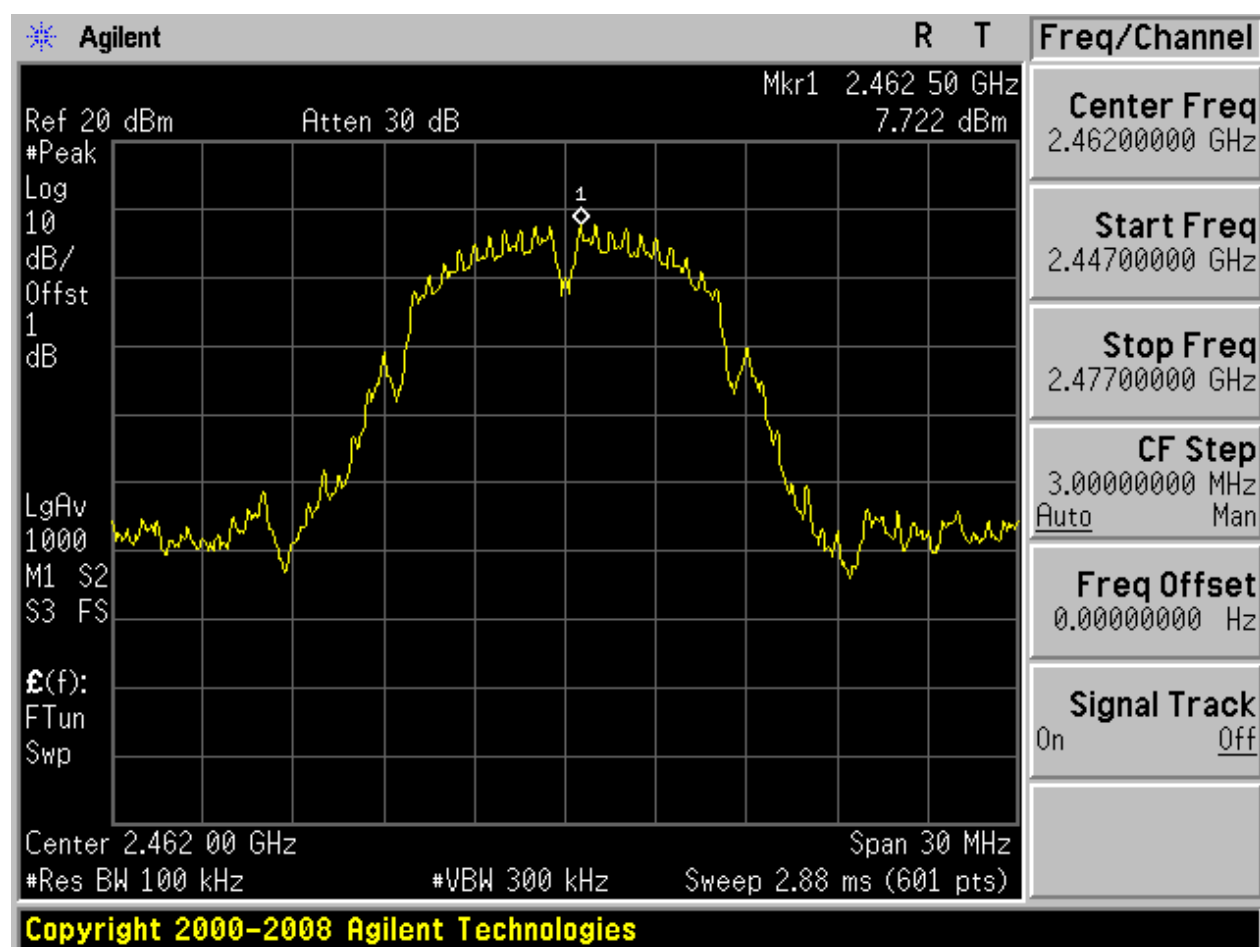



Puw:

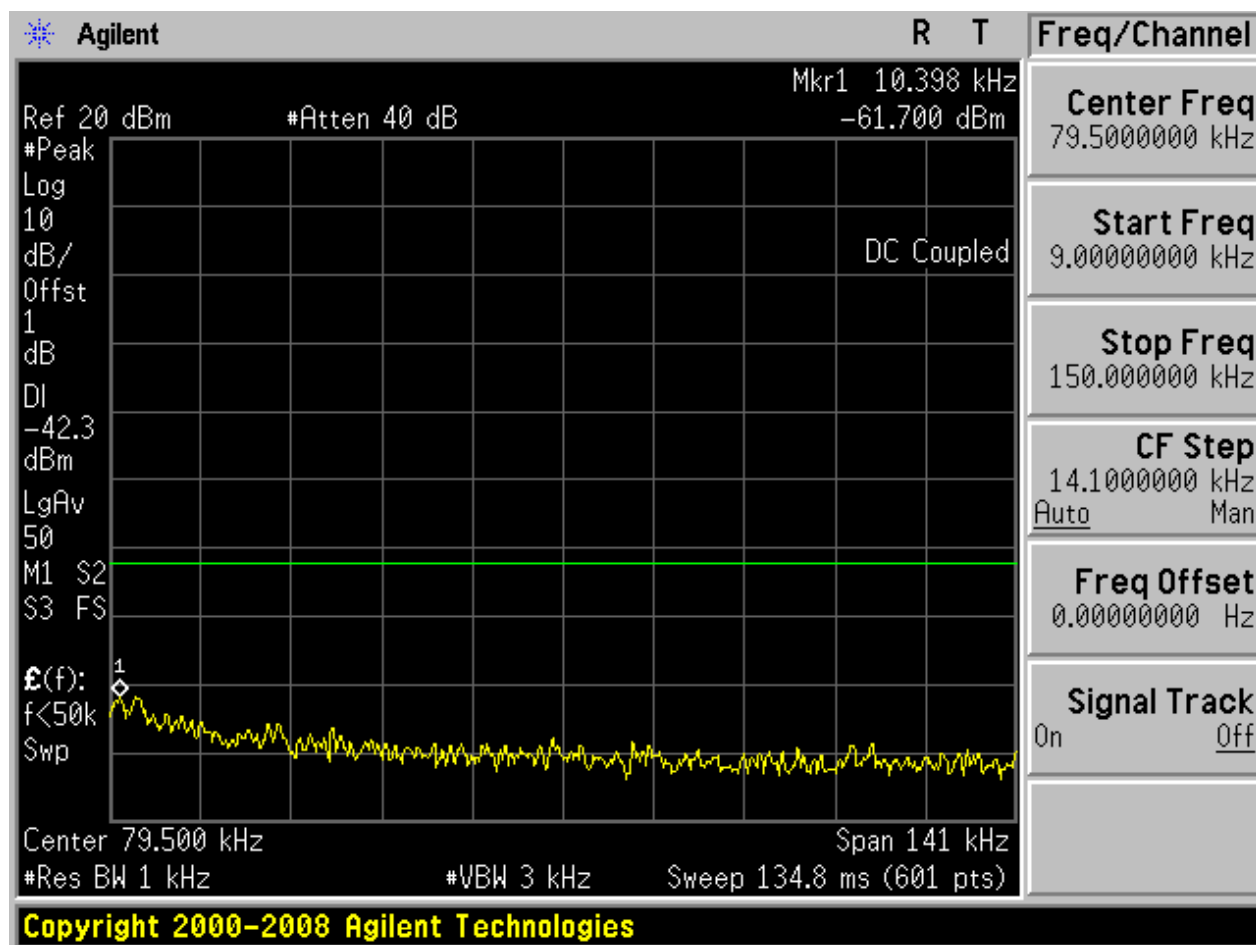


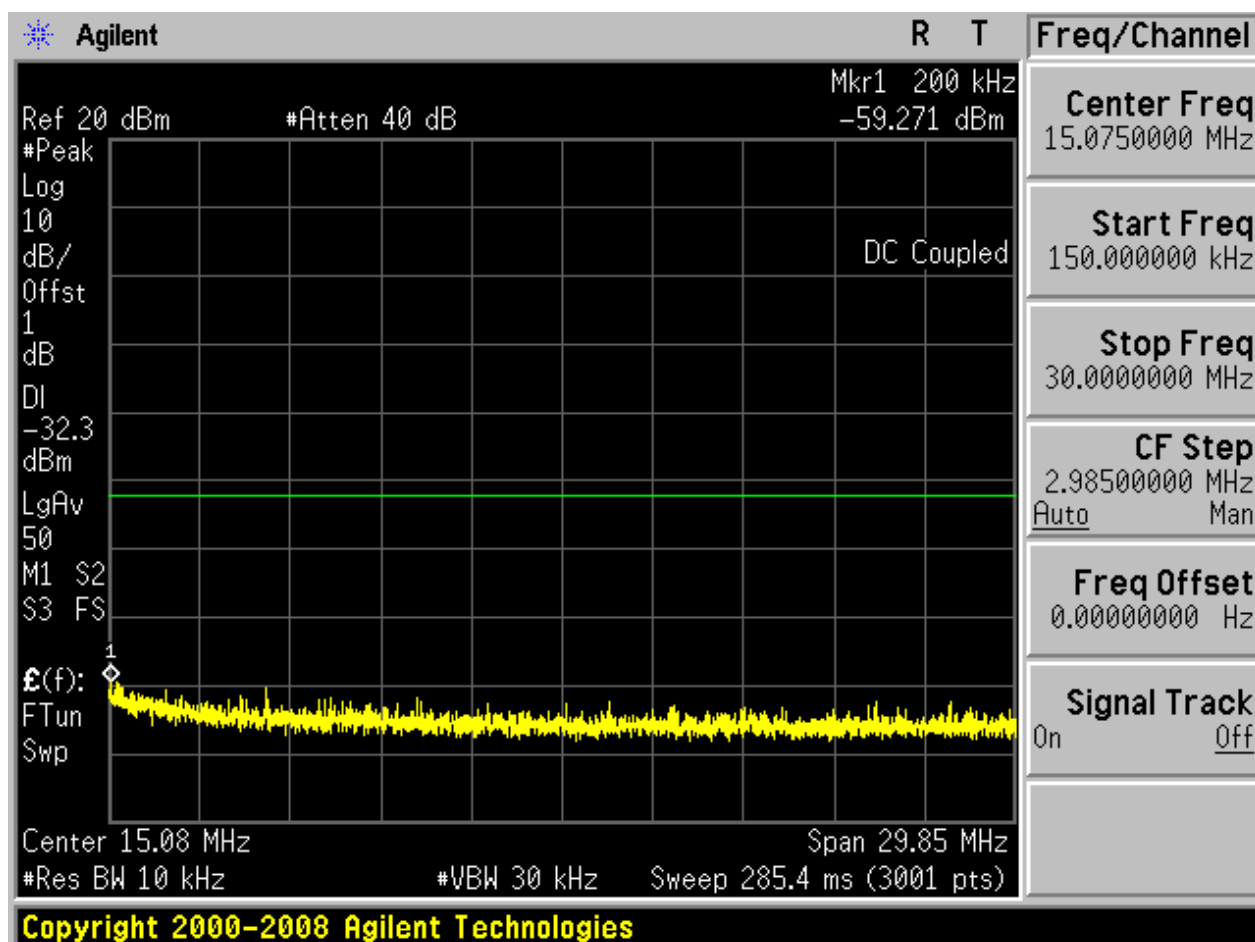

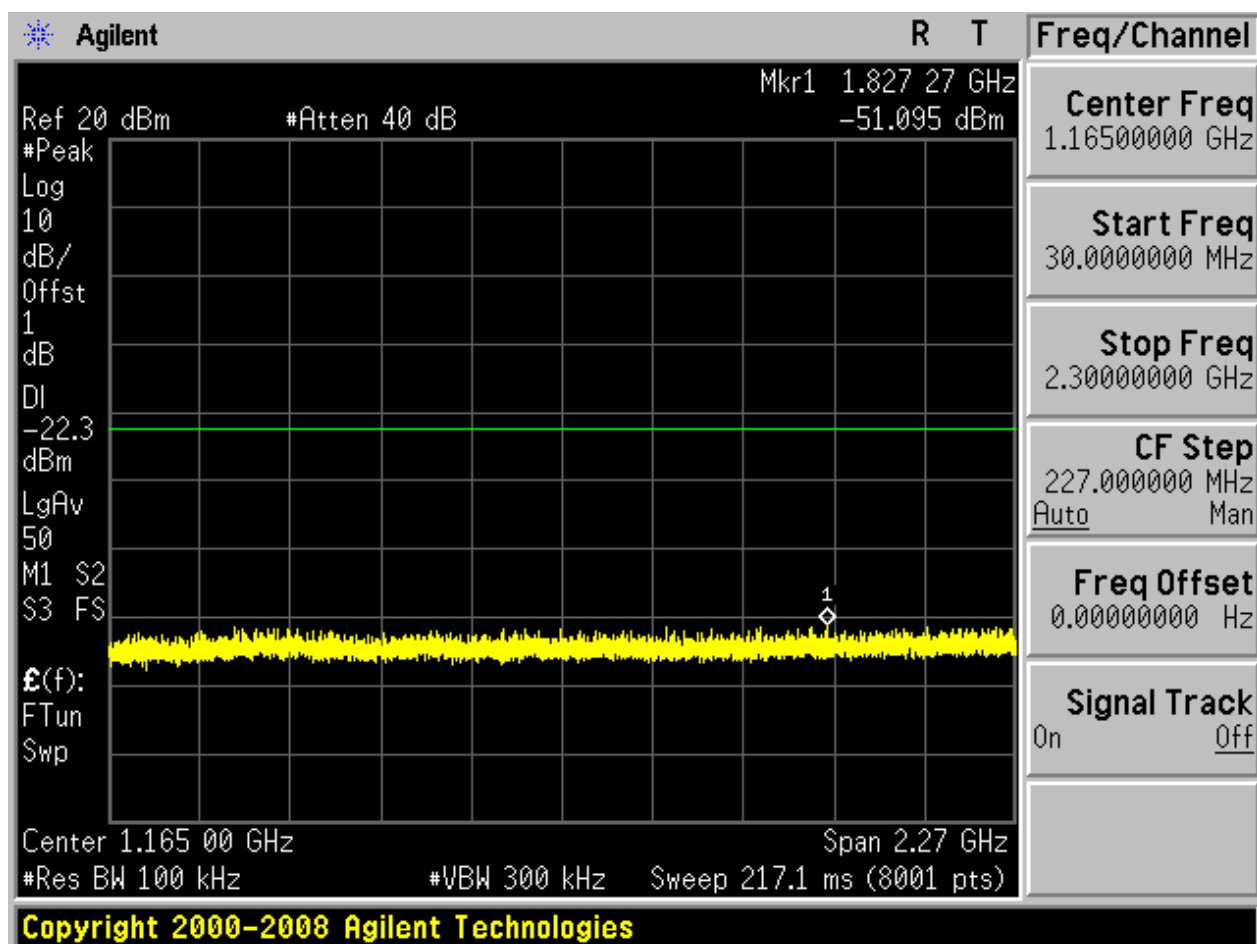

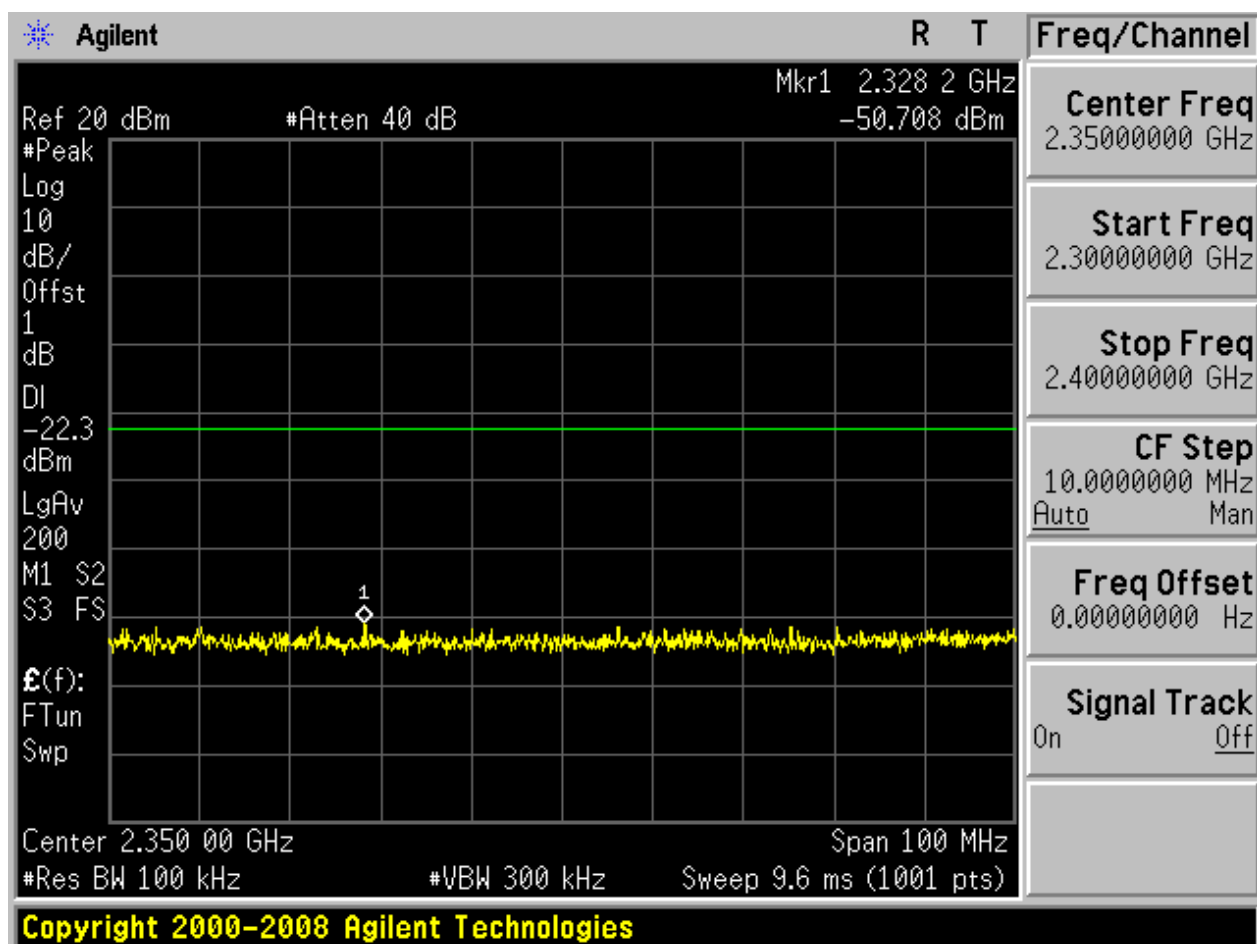


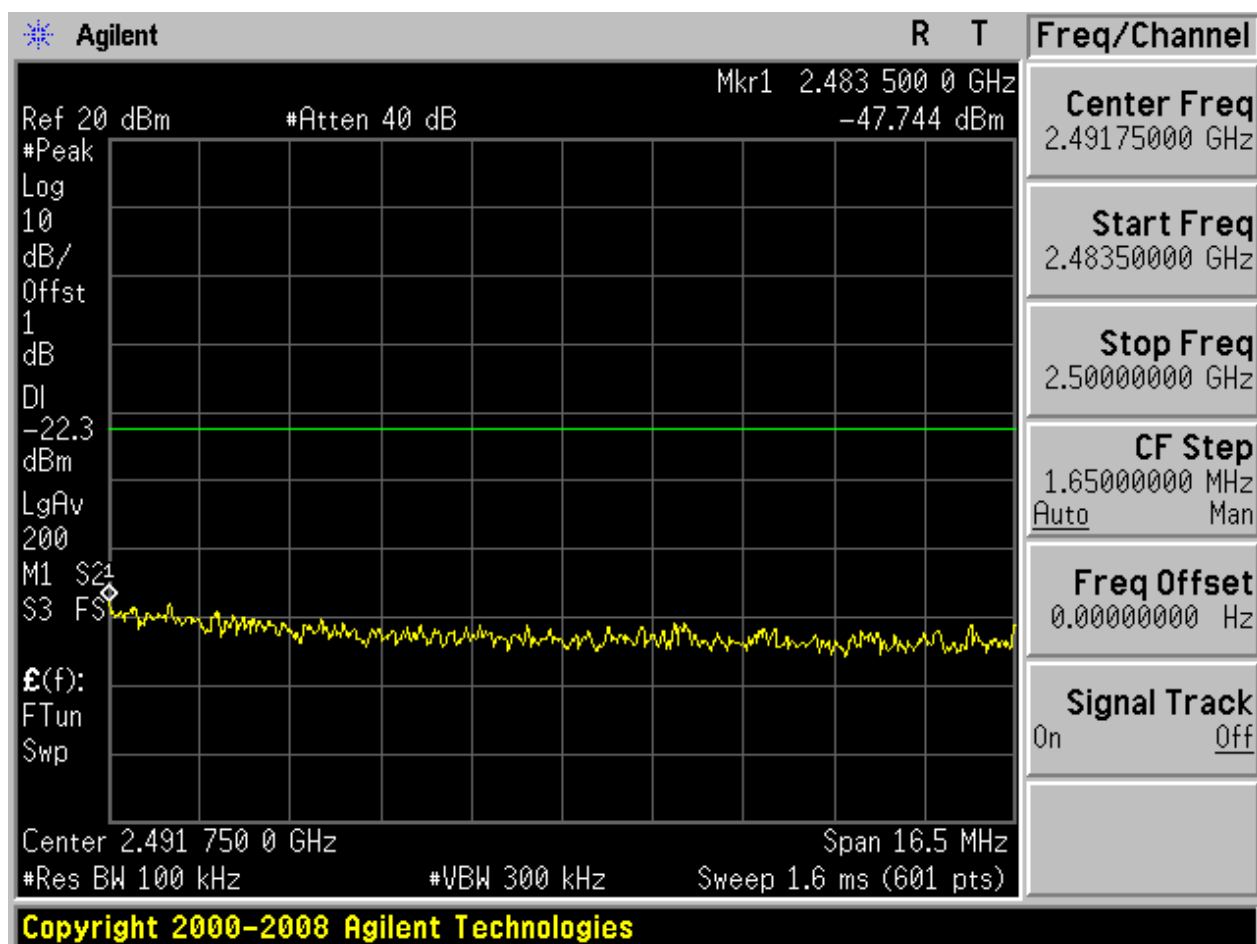

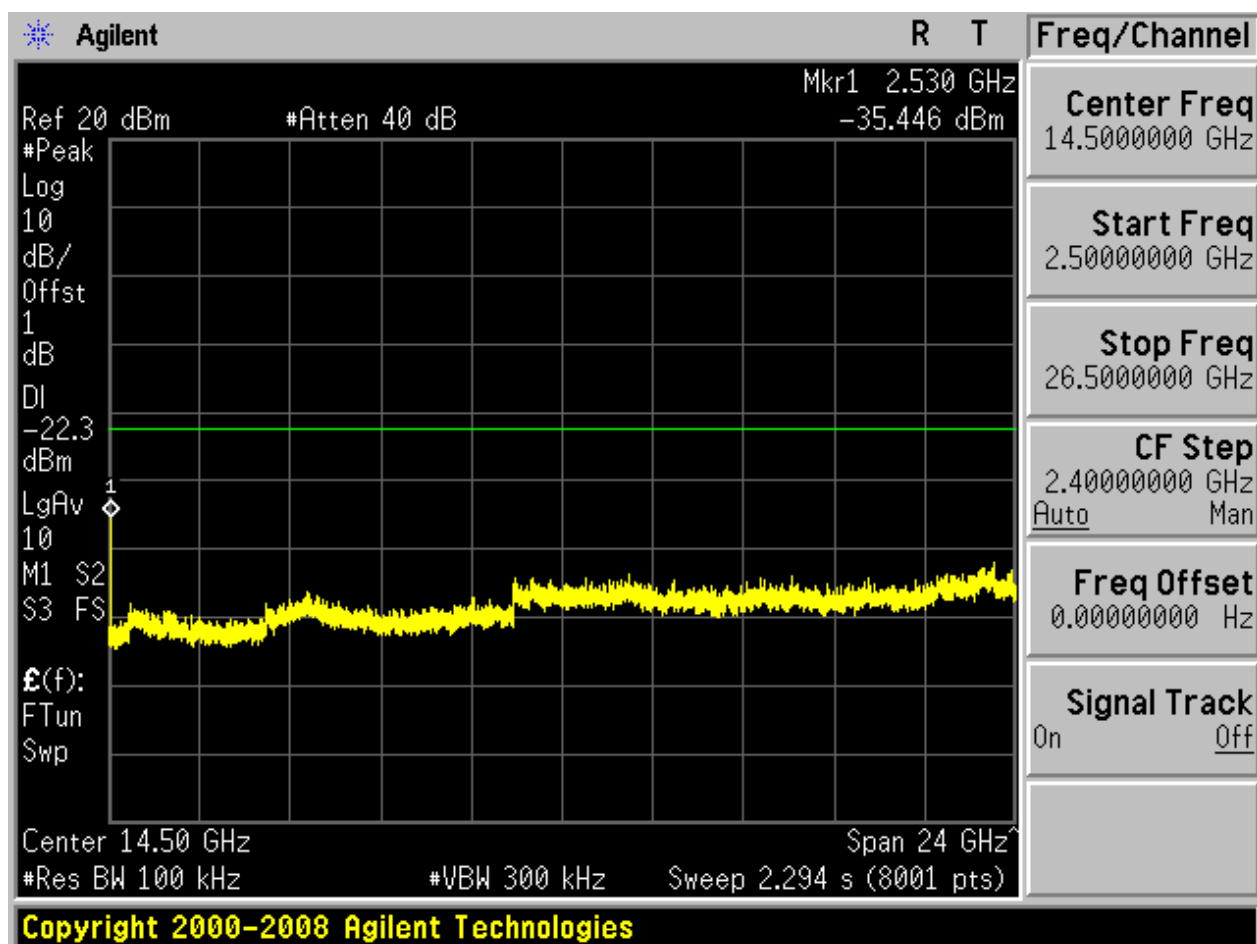


2.6 11B_H@Ant 2


Pref:

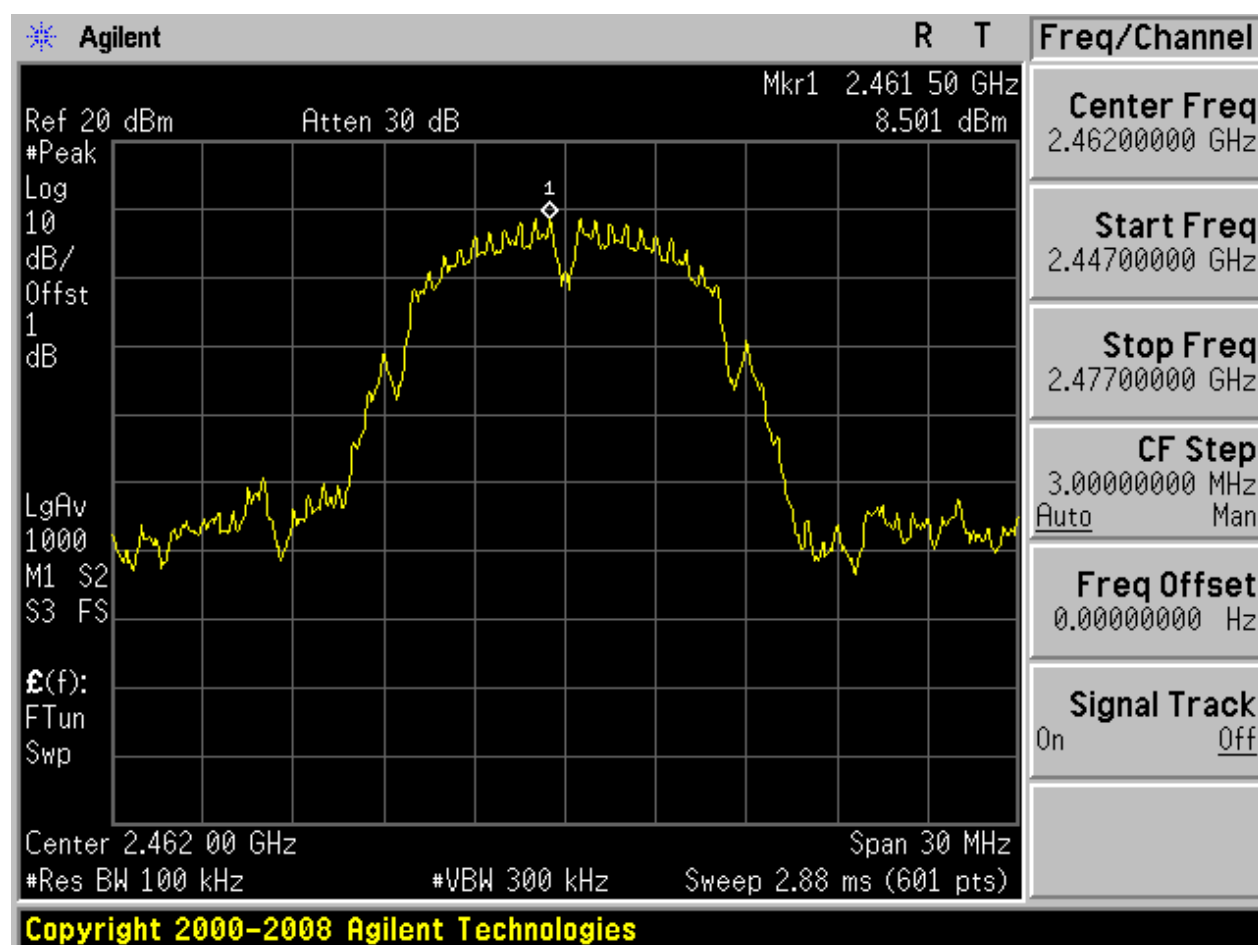






Puw:

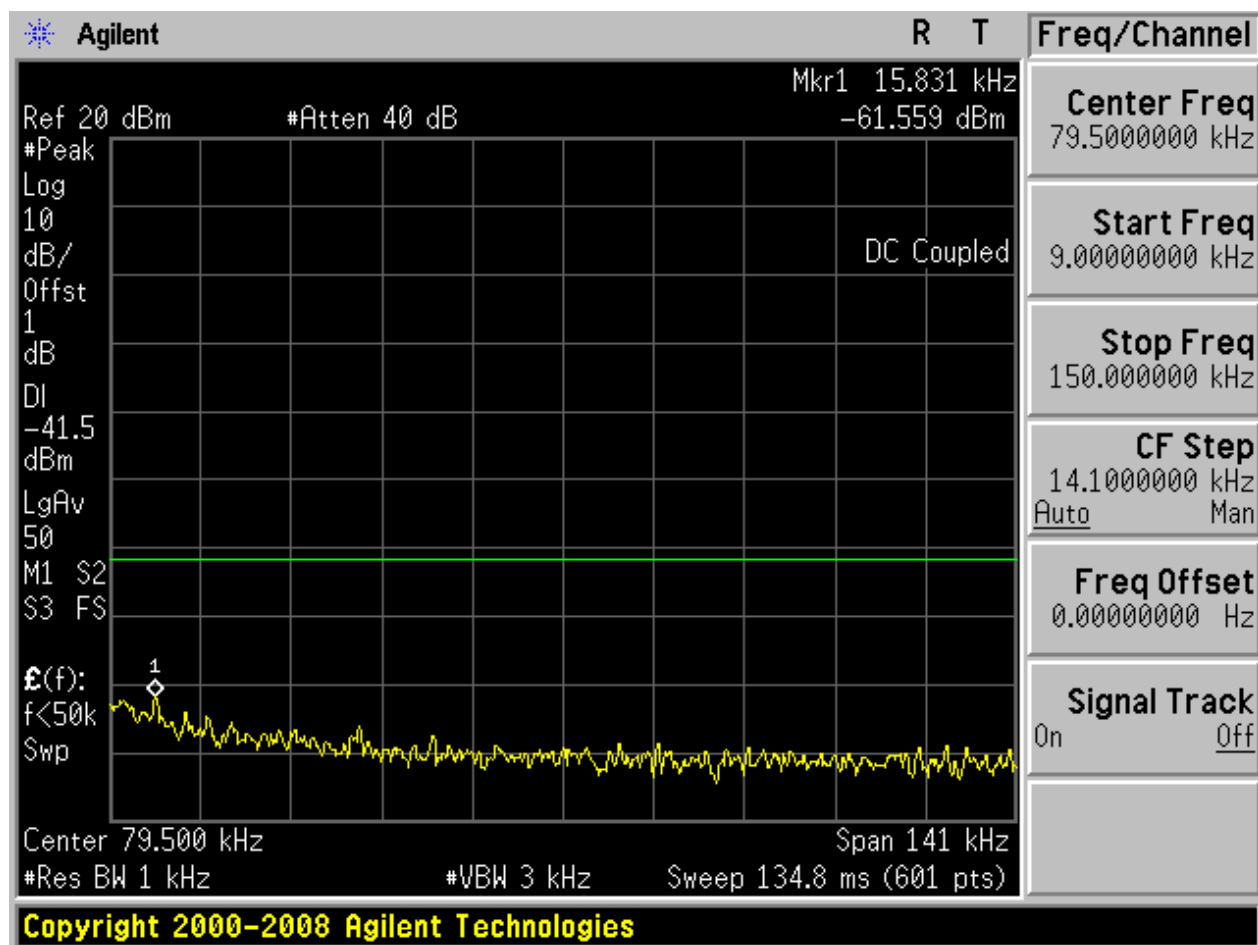


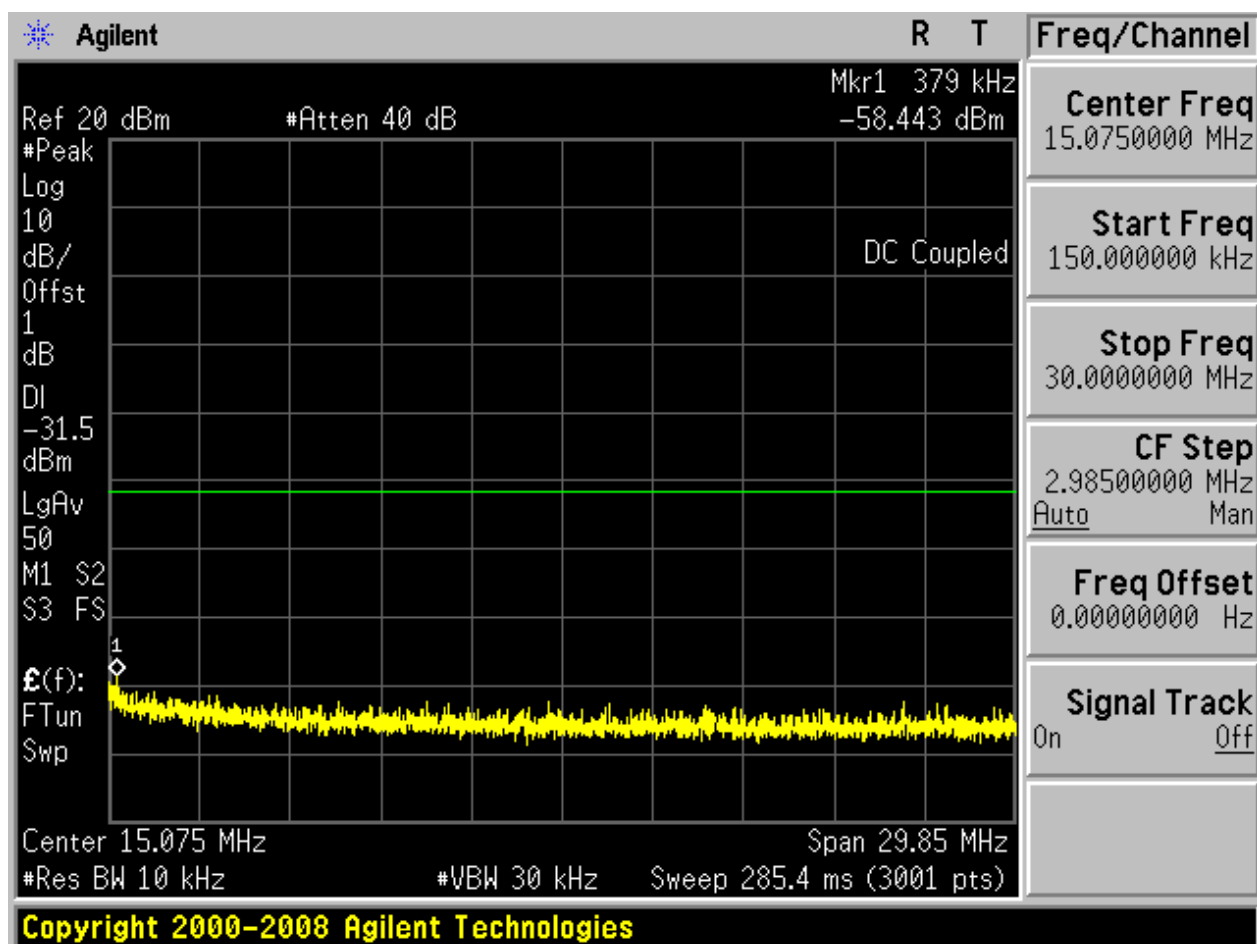

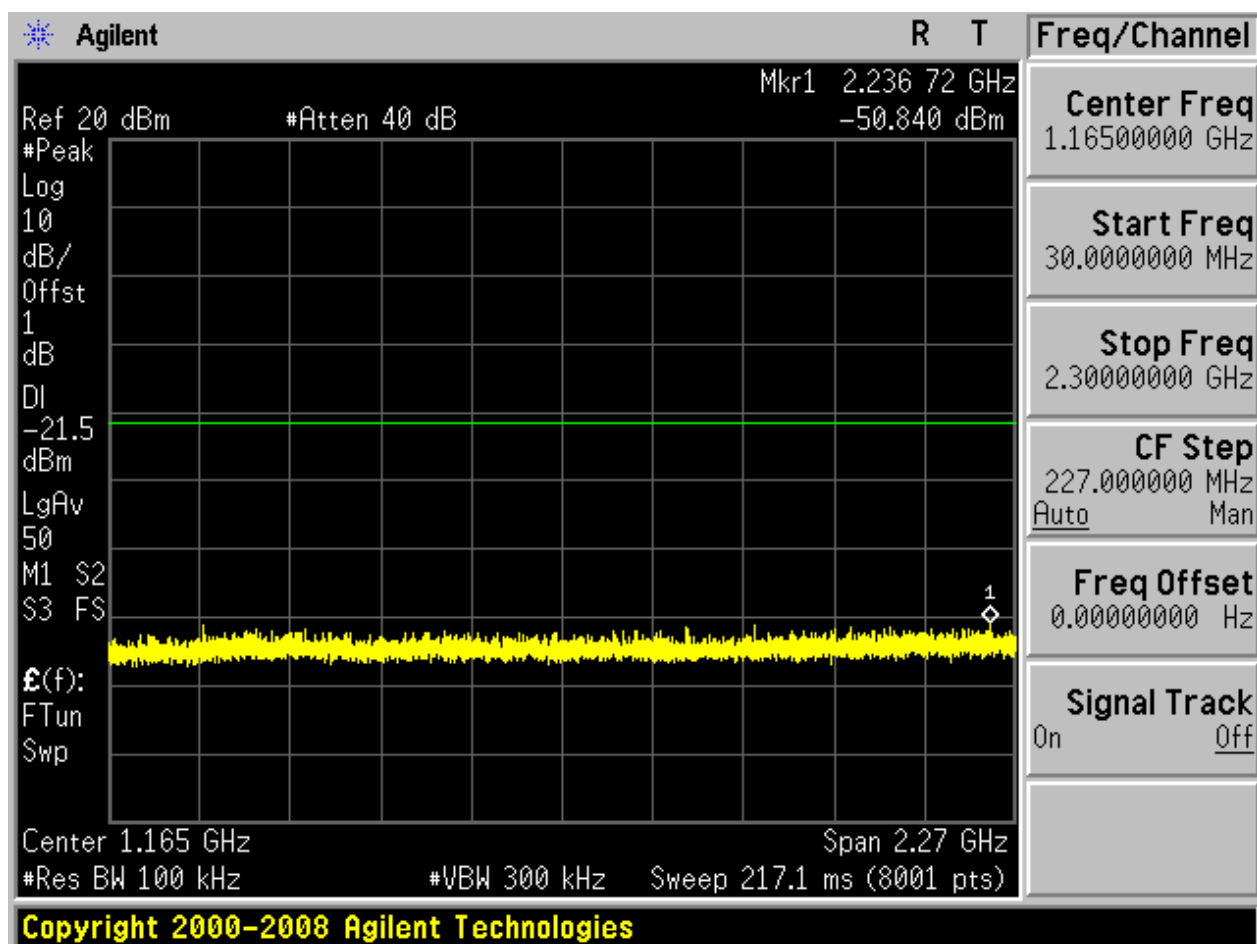

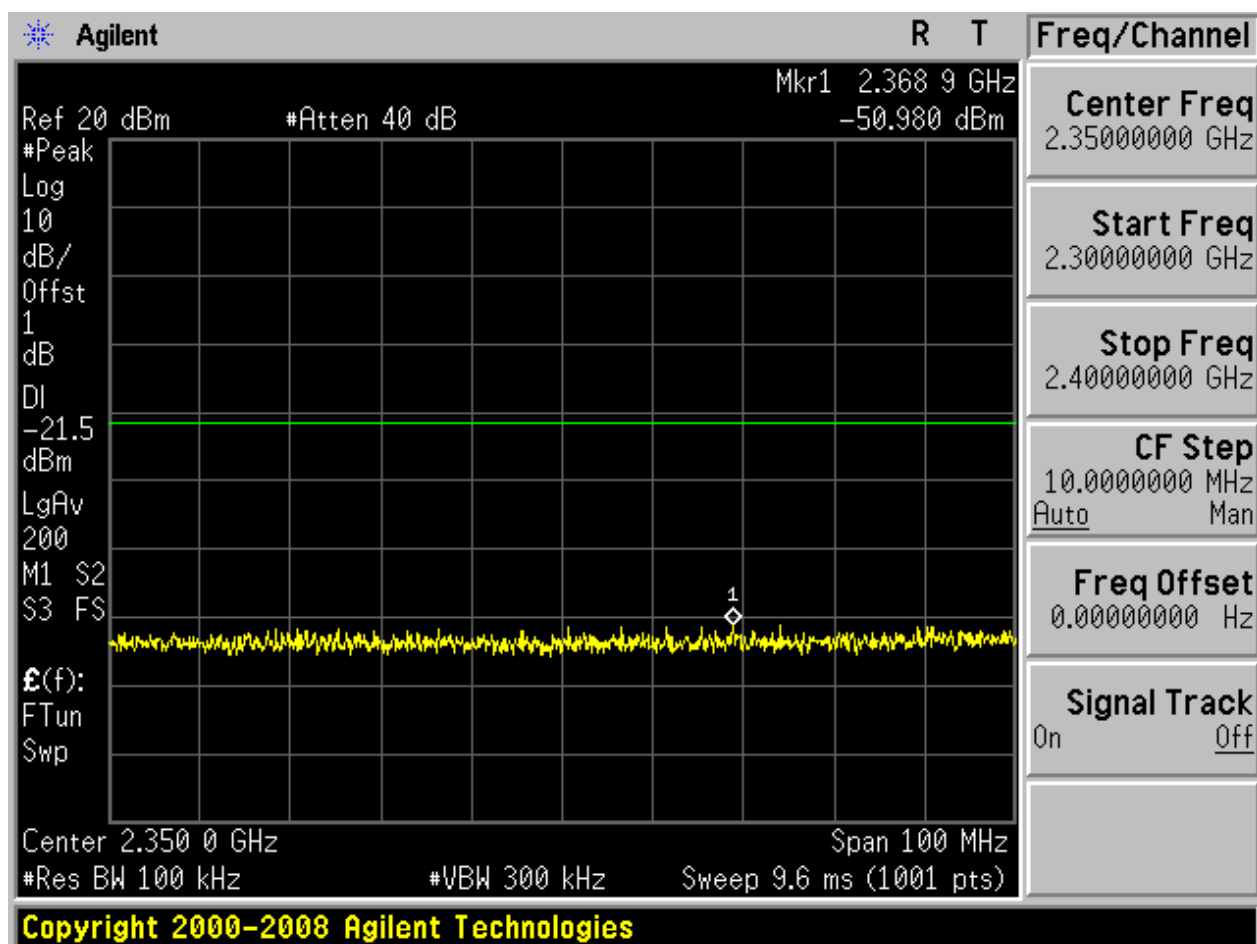


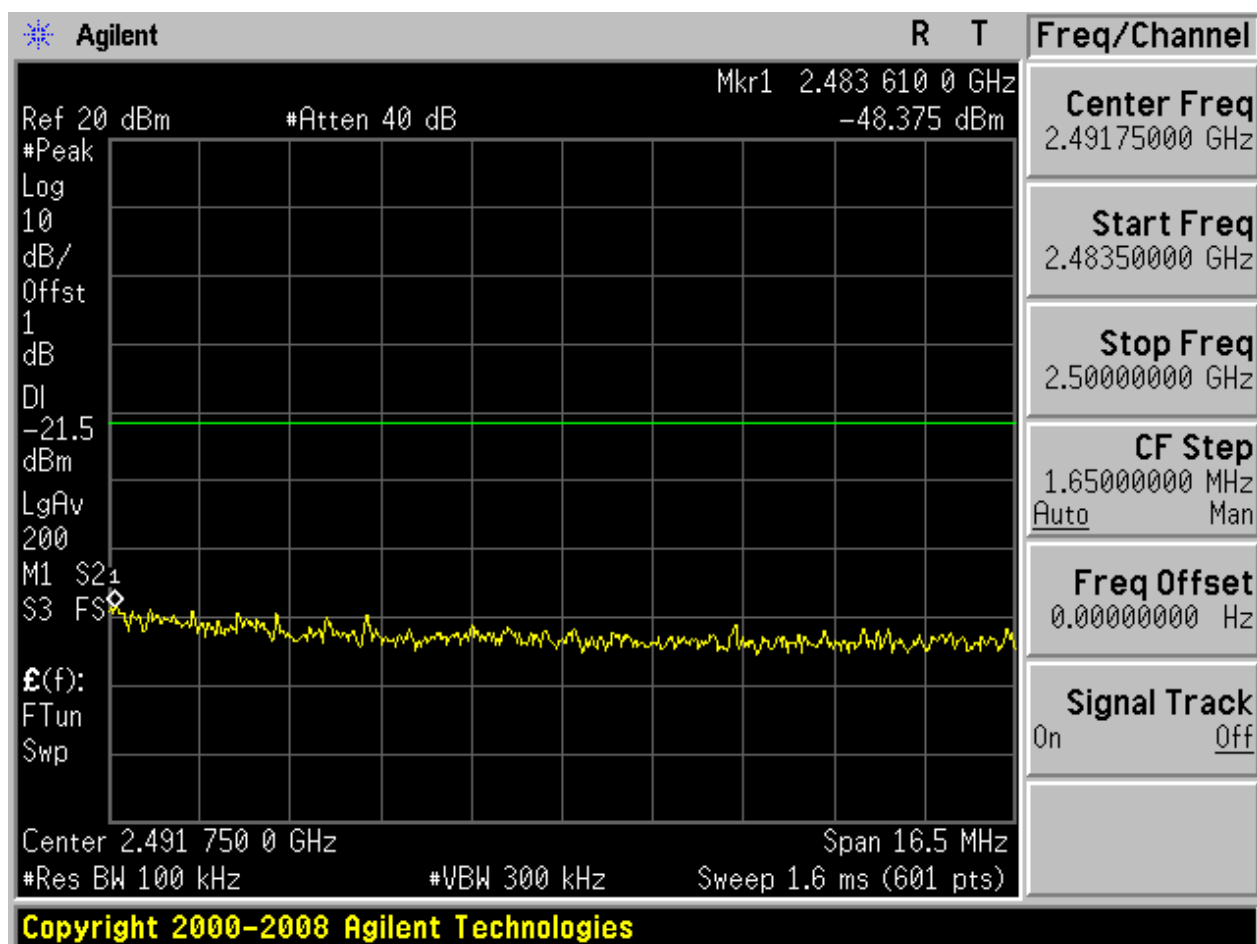

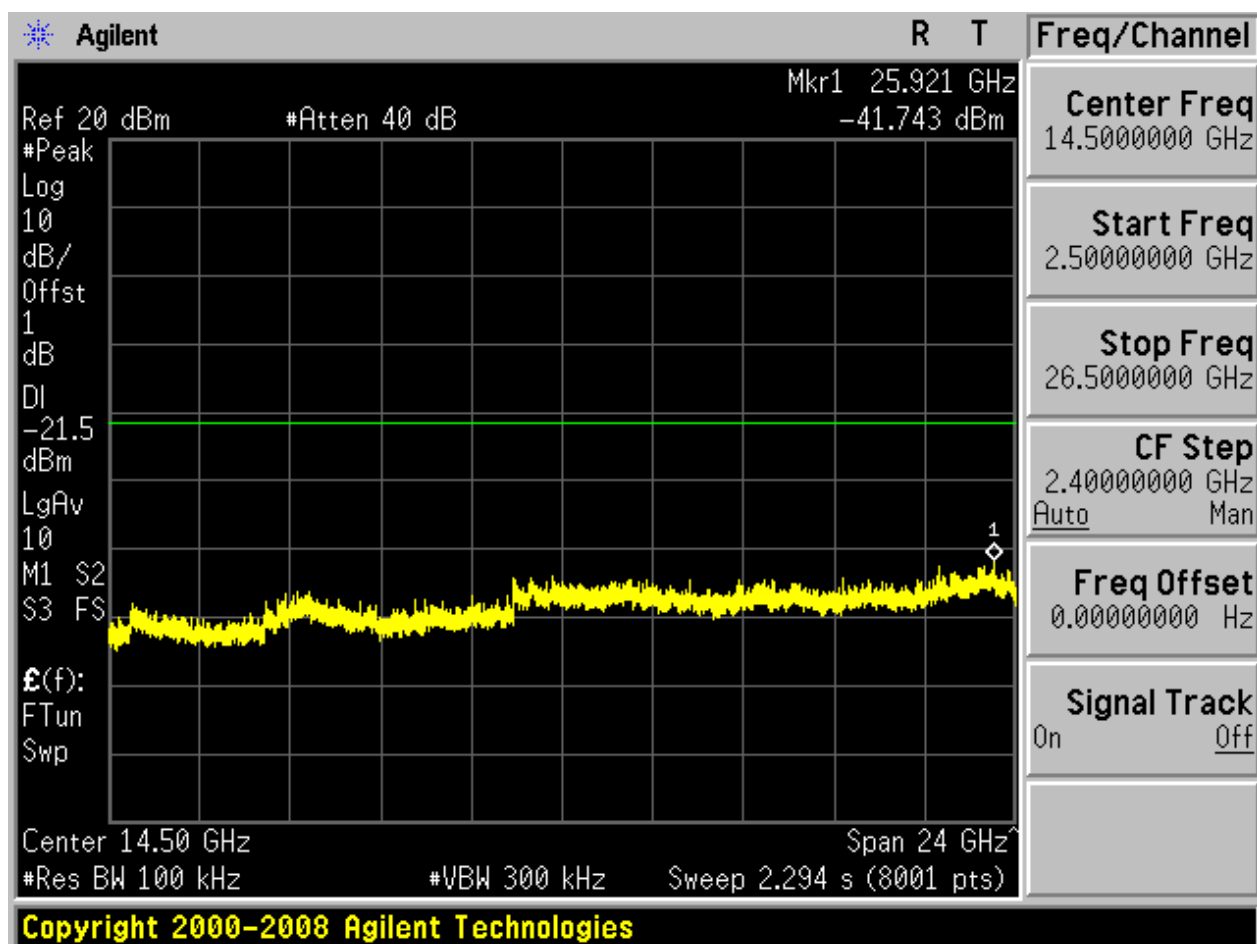


2.7 11G_L@Ant 1


Pref:

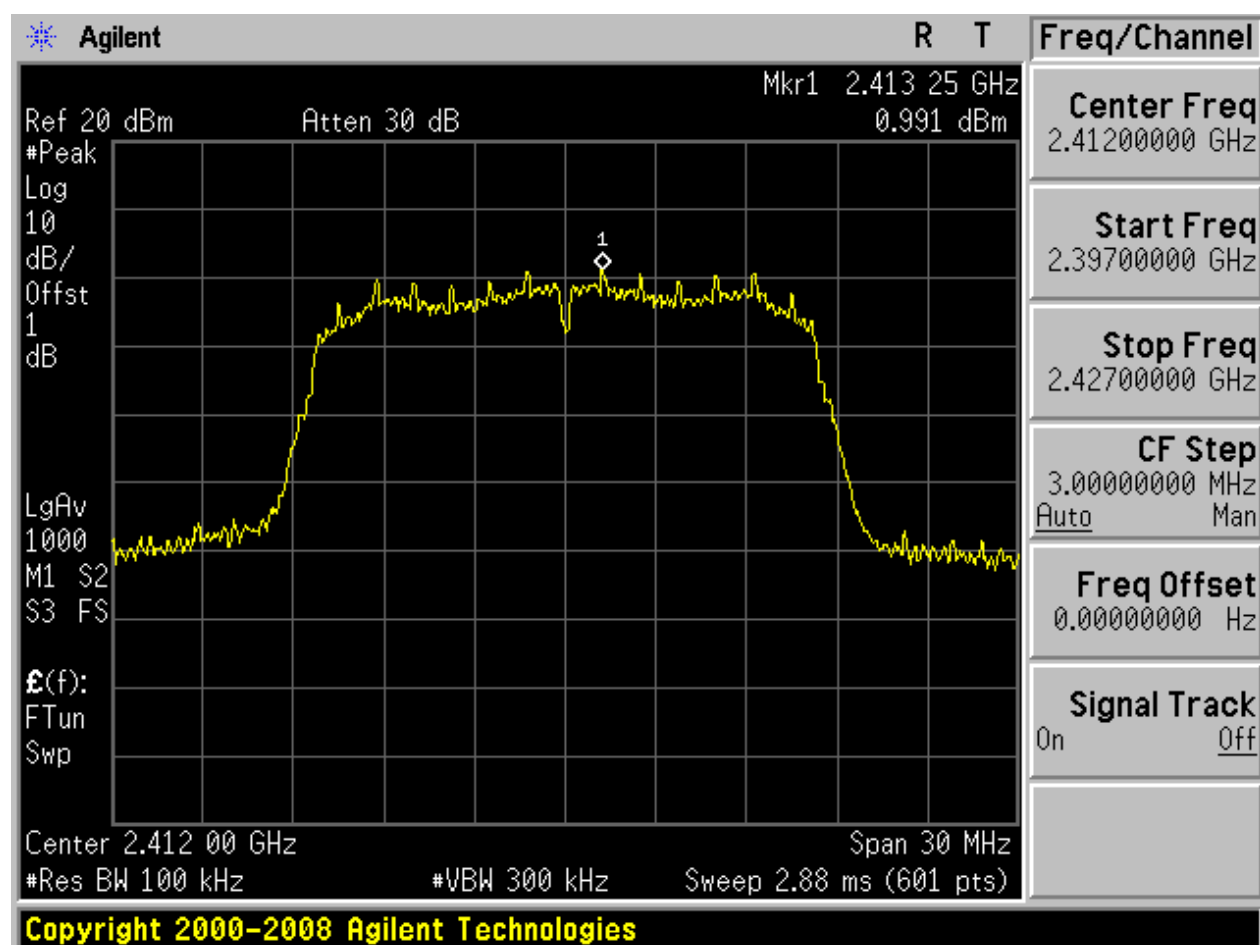






Puw:

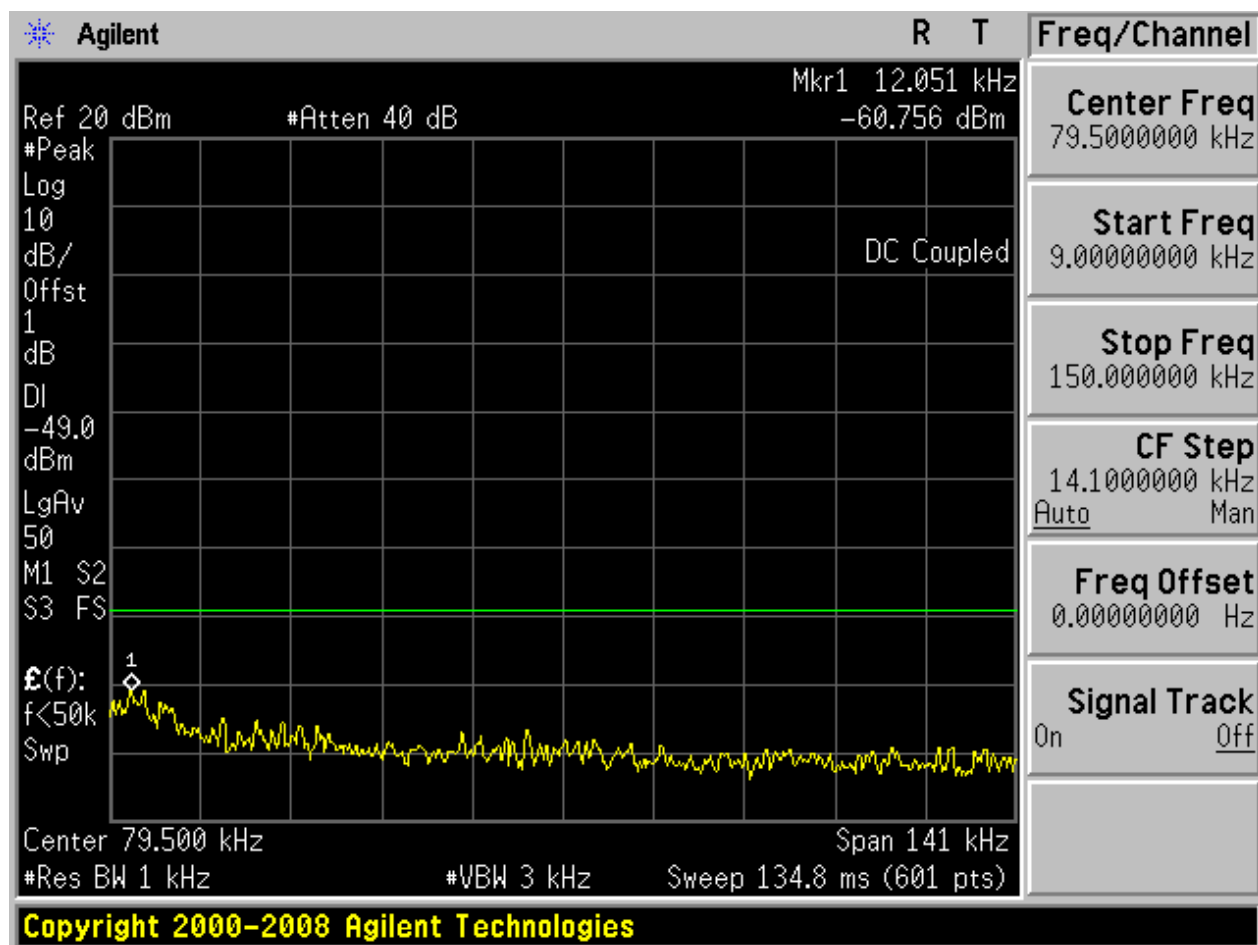


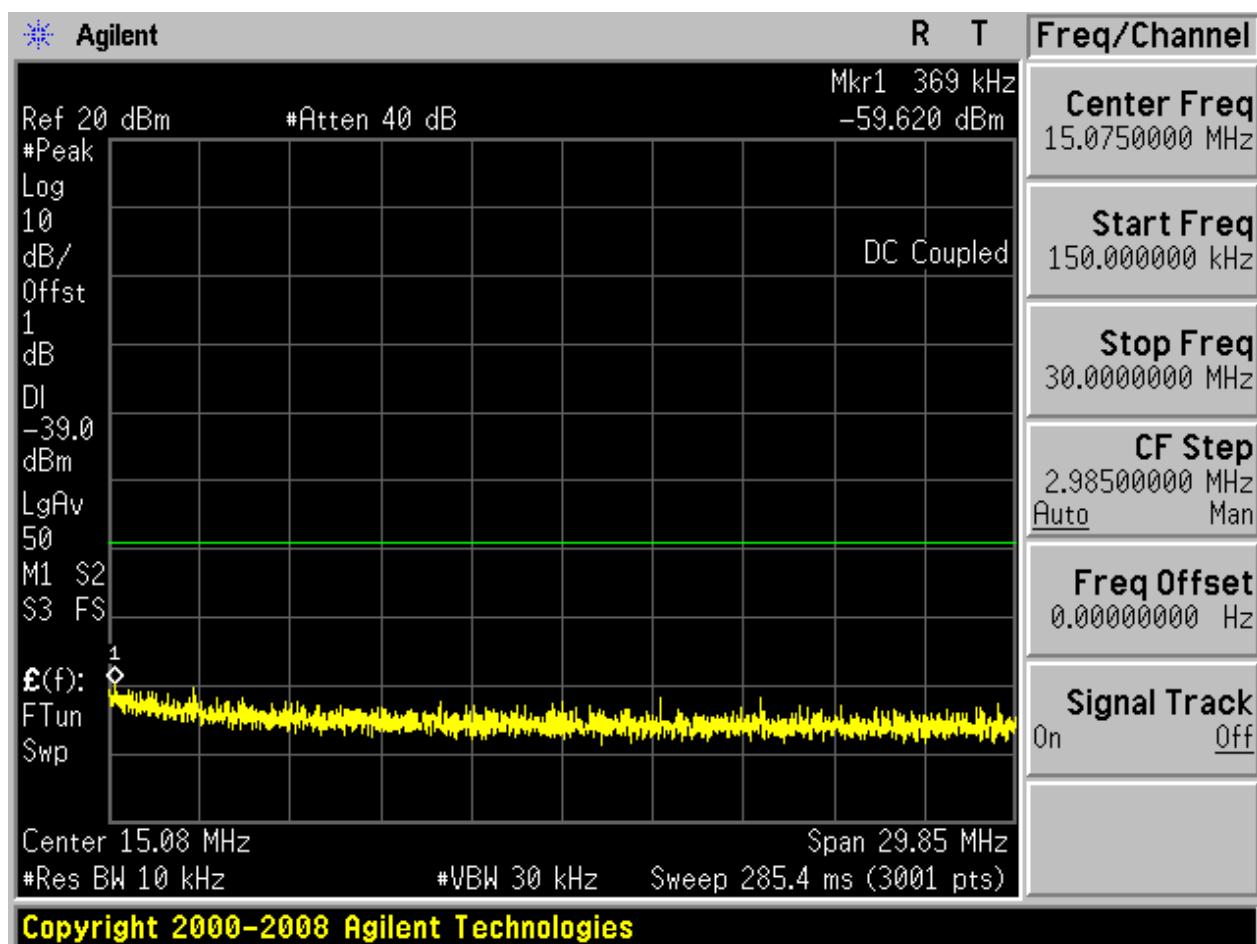

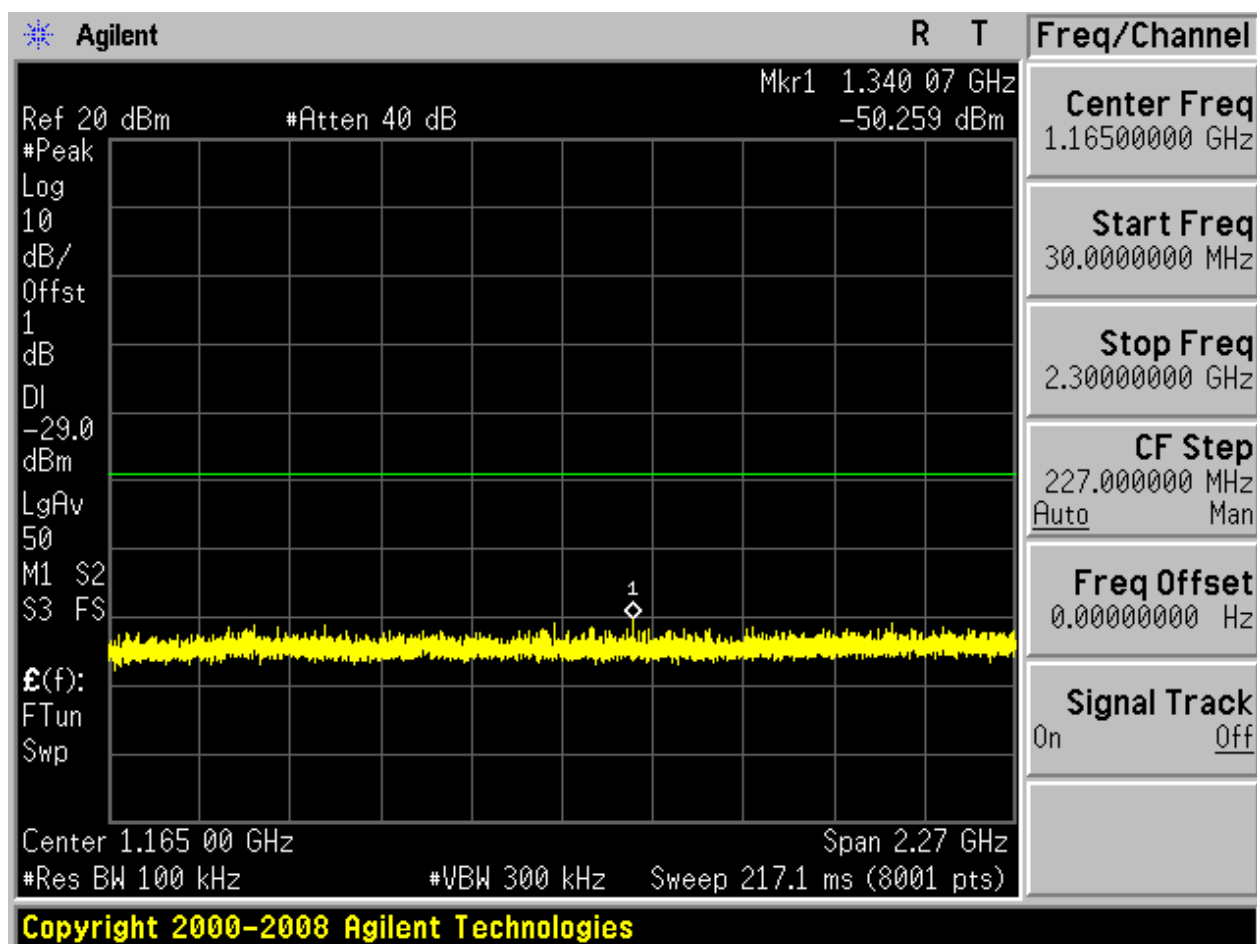

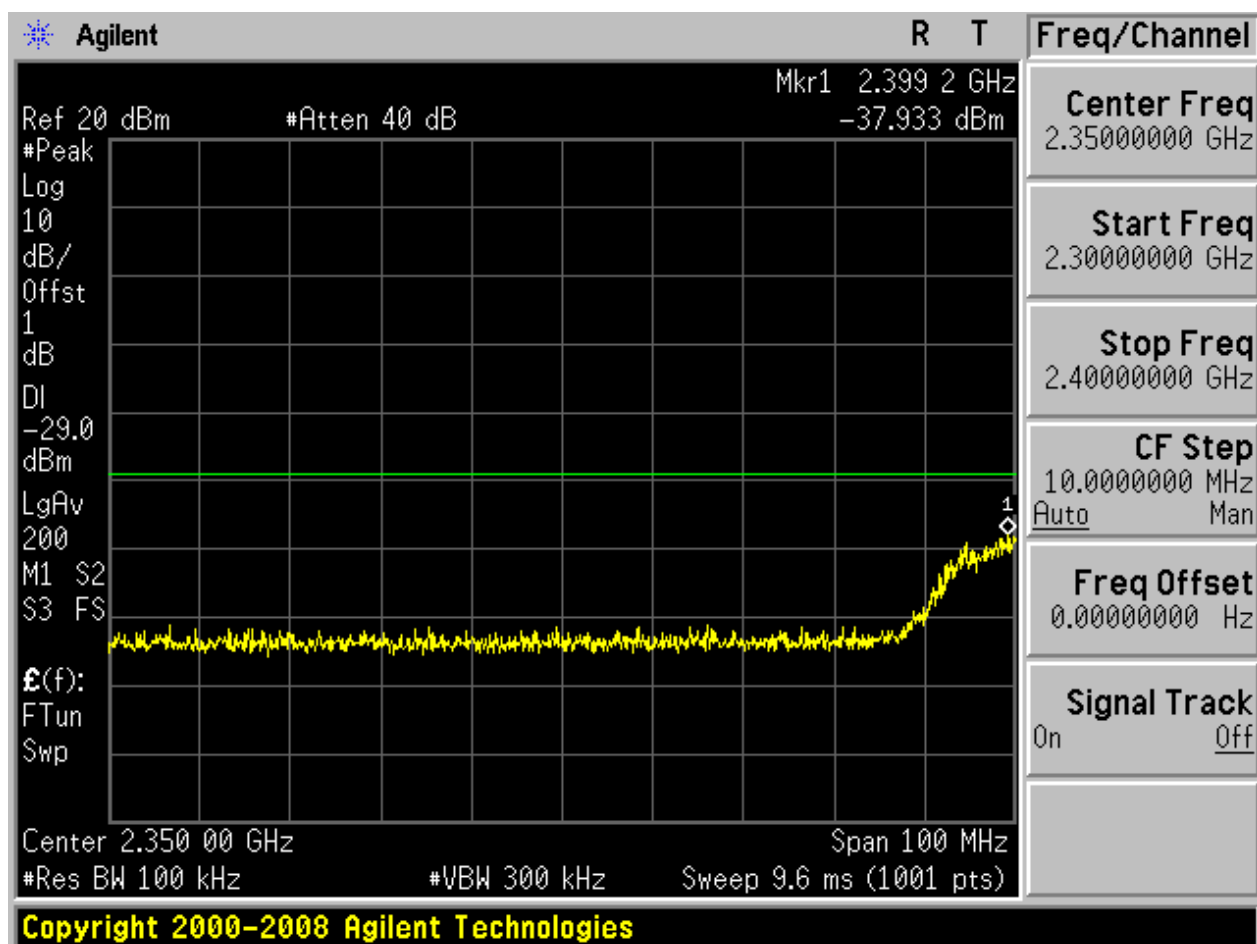


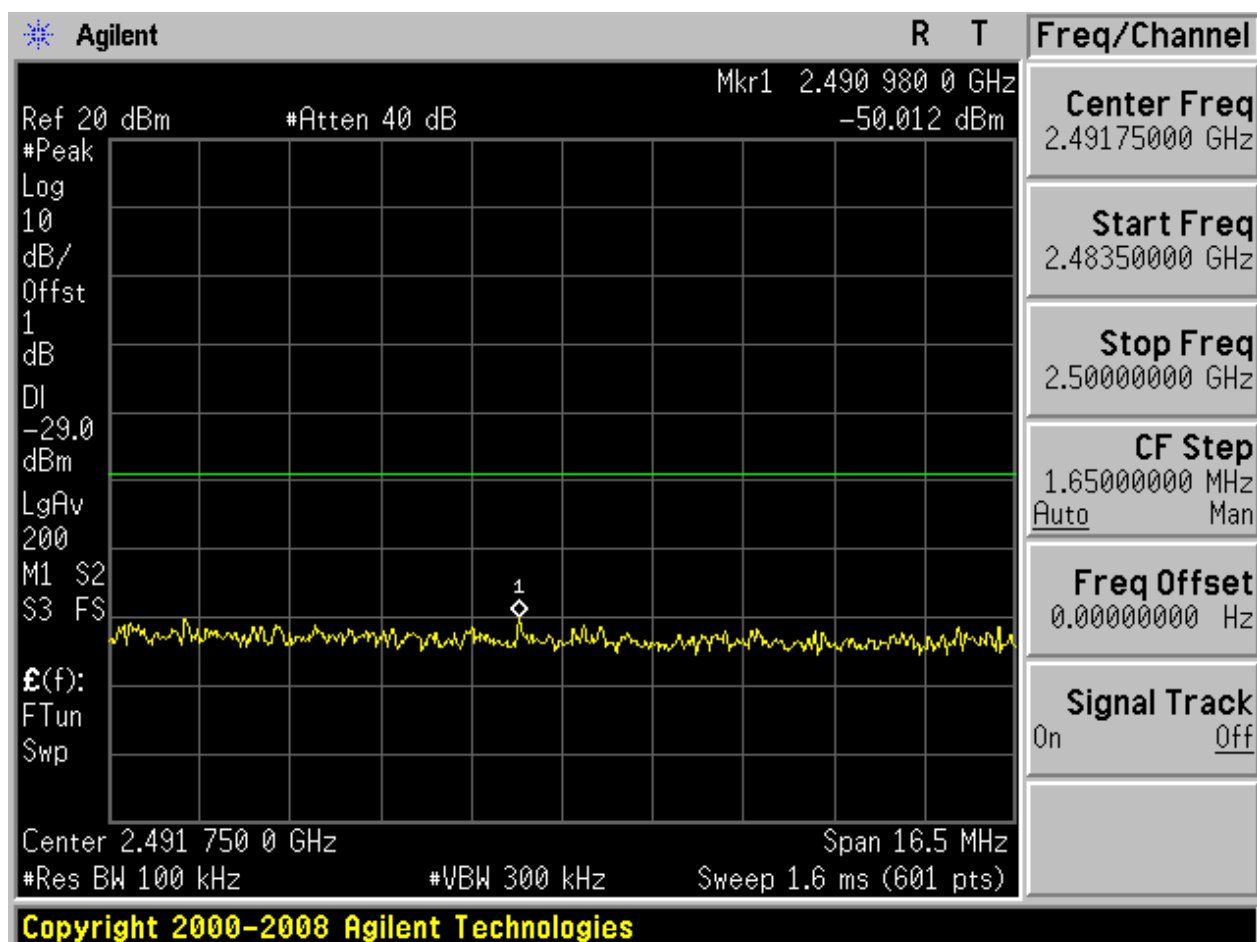

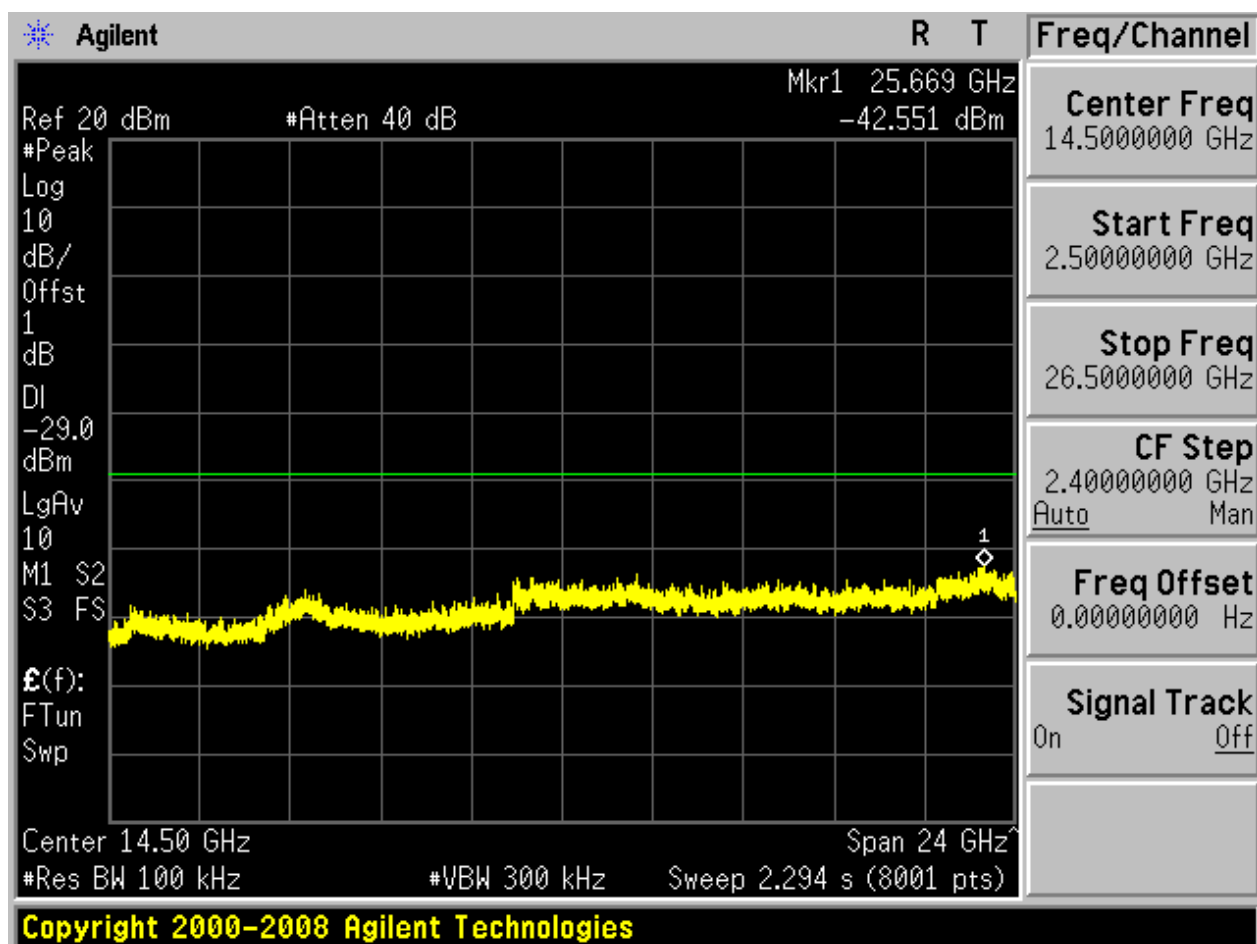



2.8 11G_L@Ant 2


Pref:

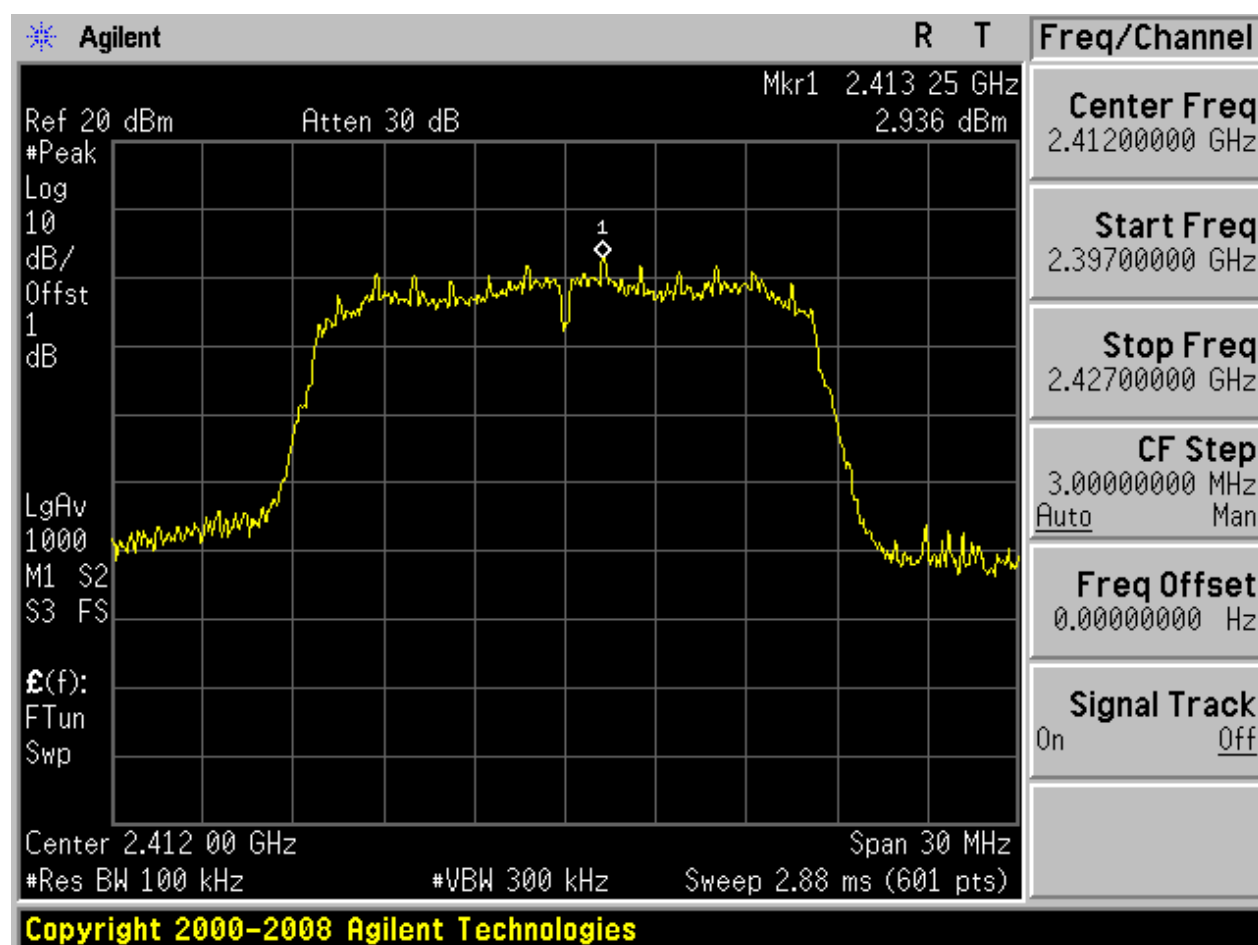



Puw:

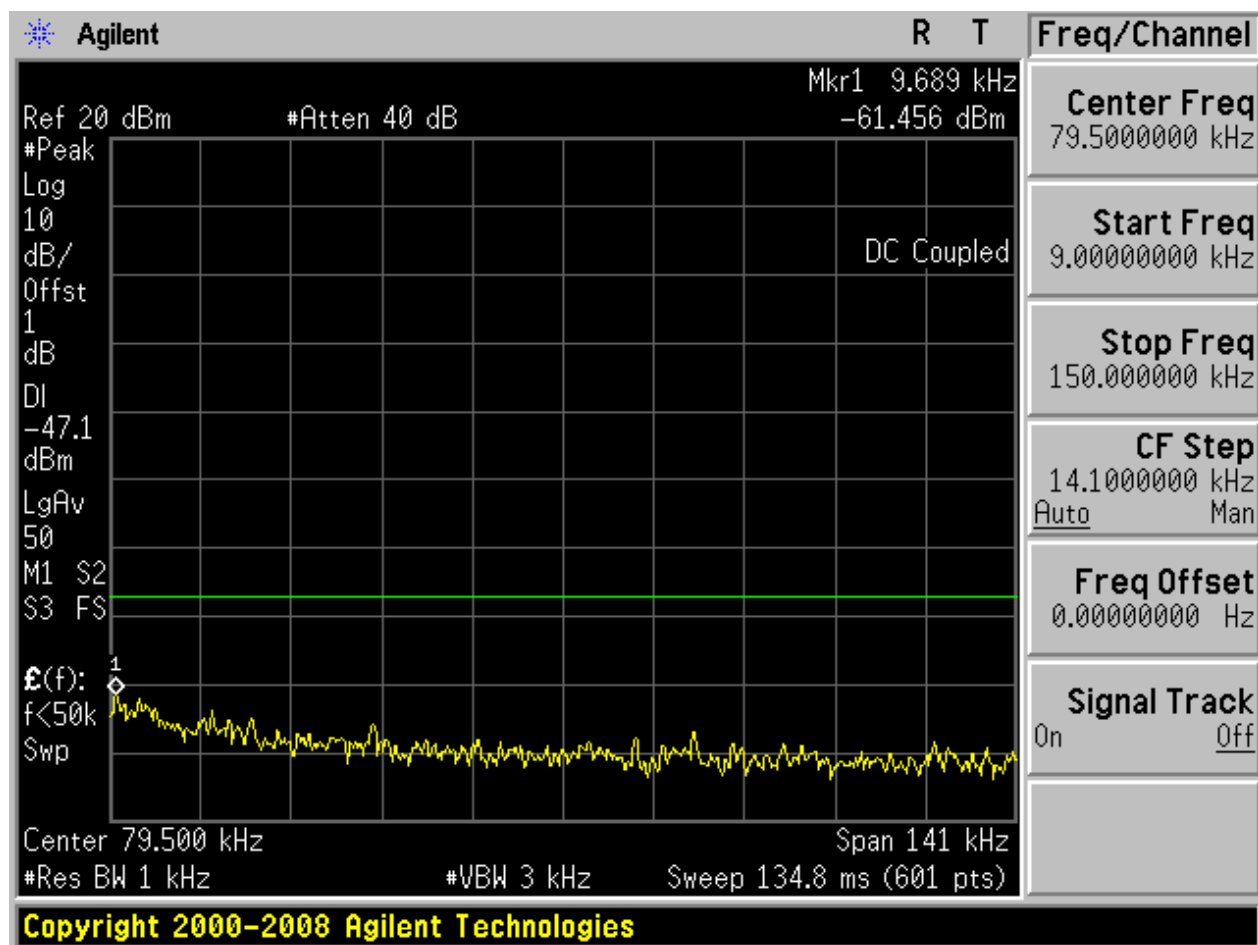


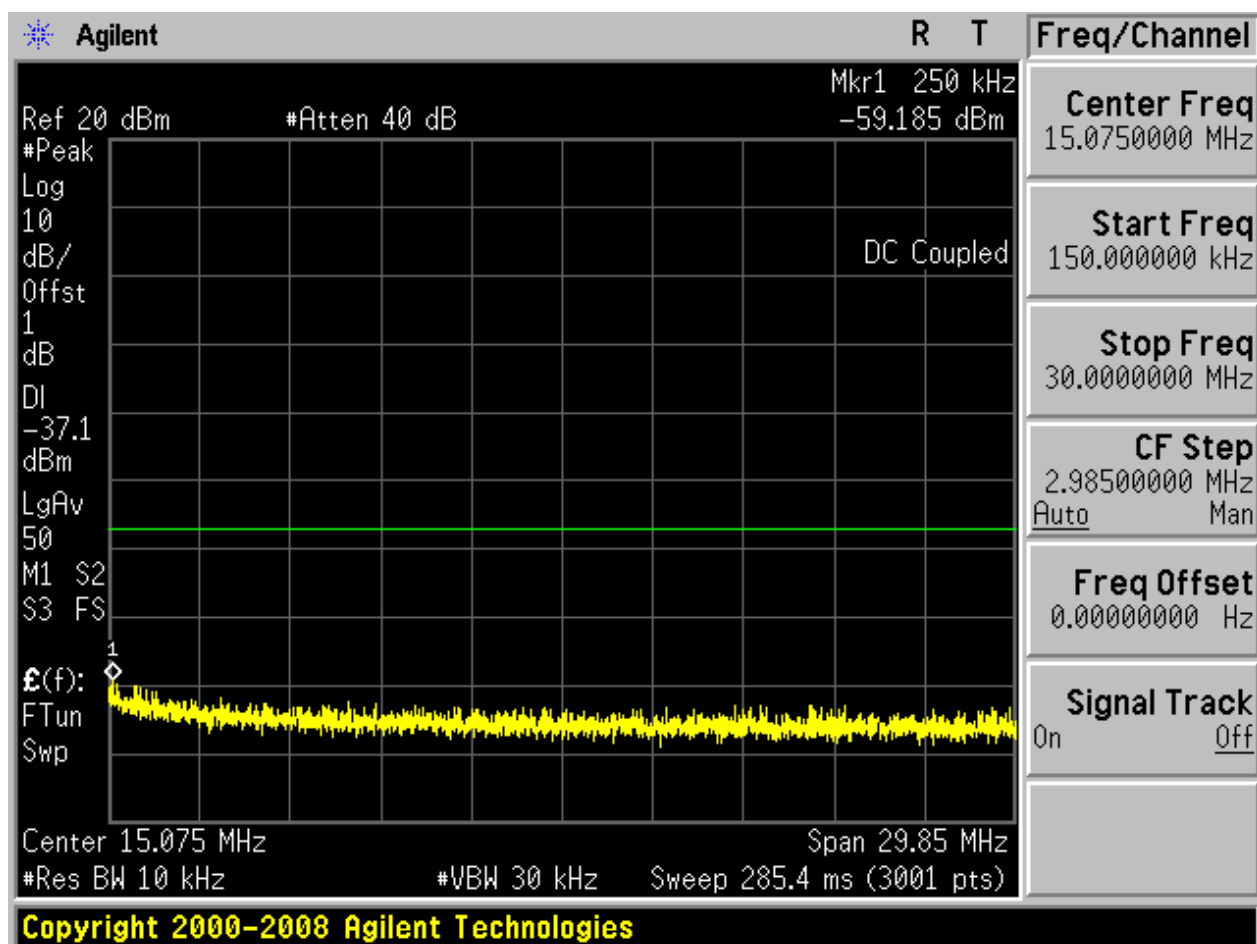

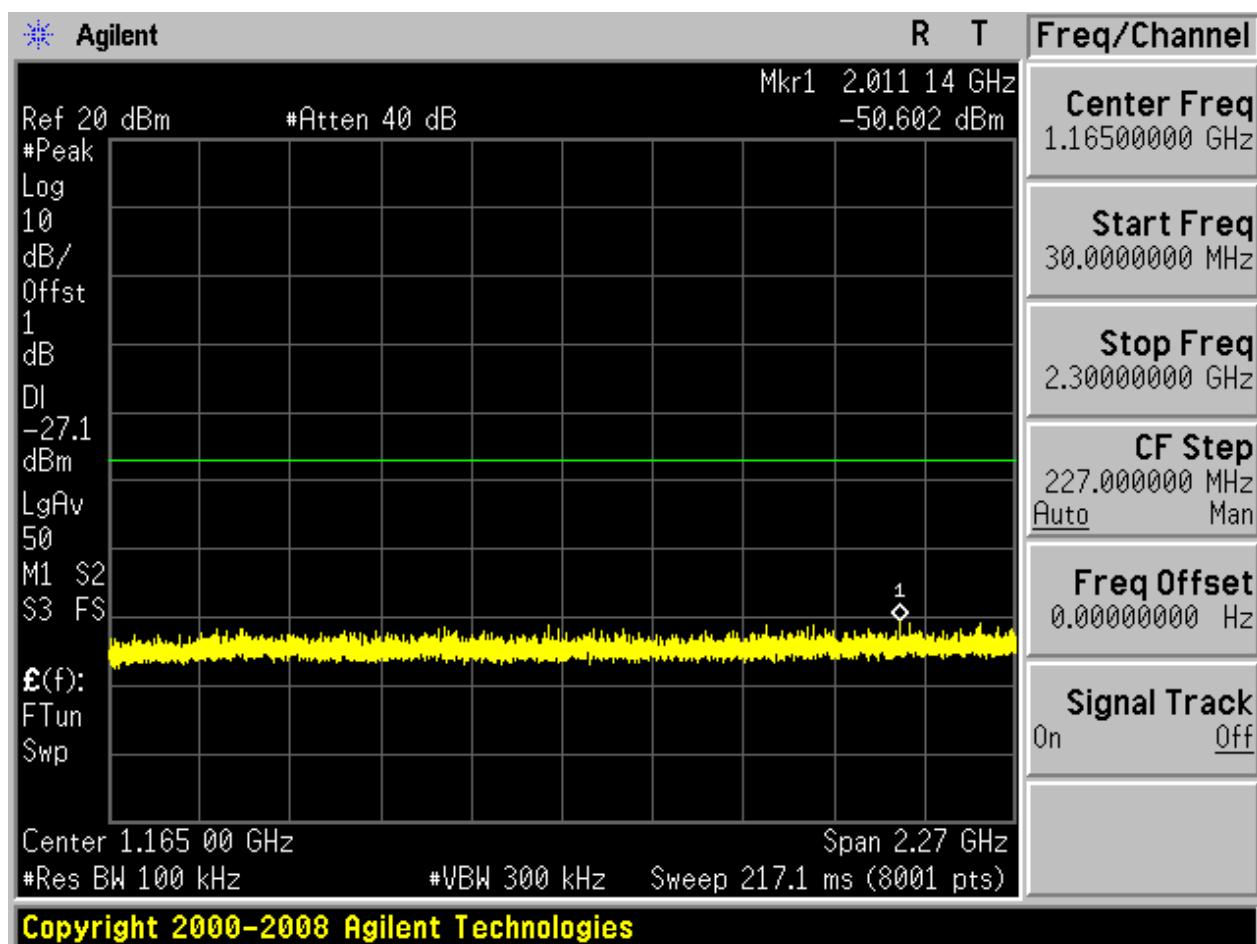

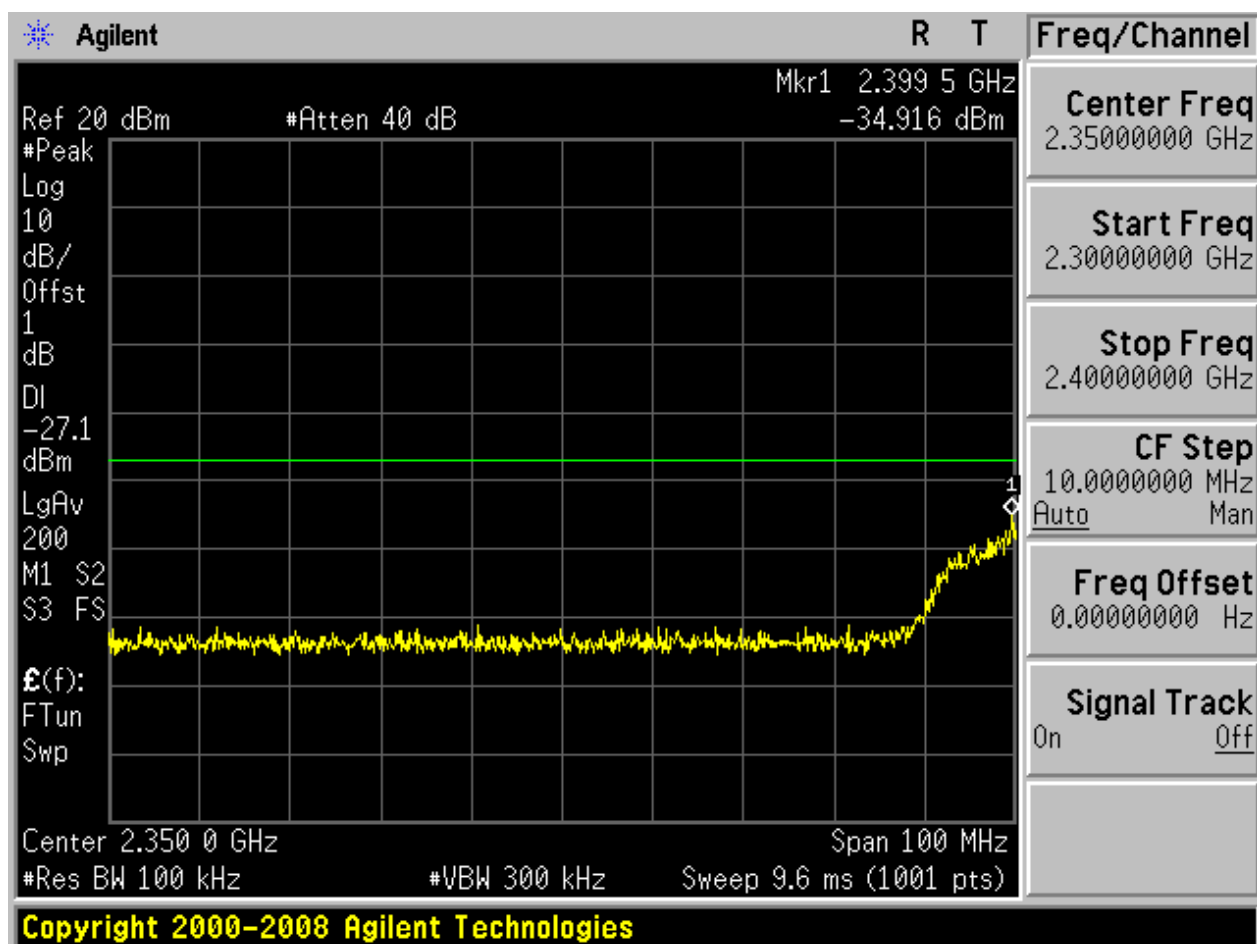


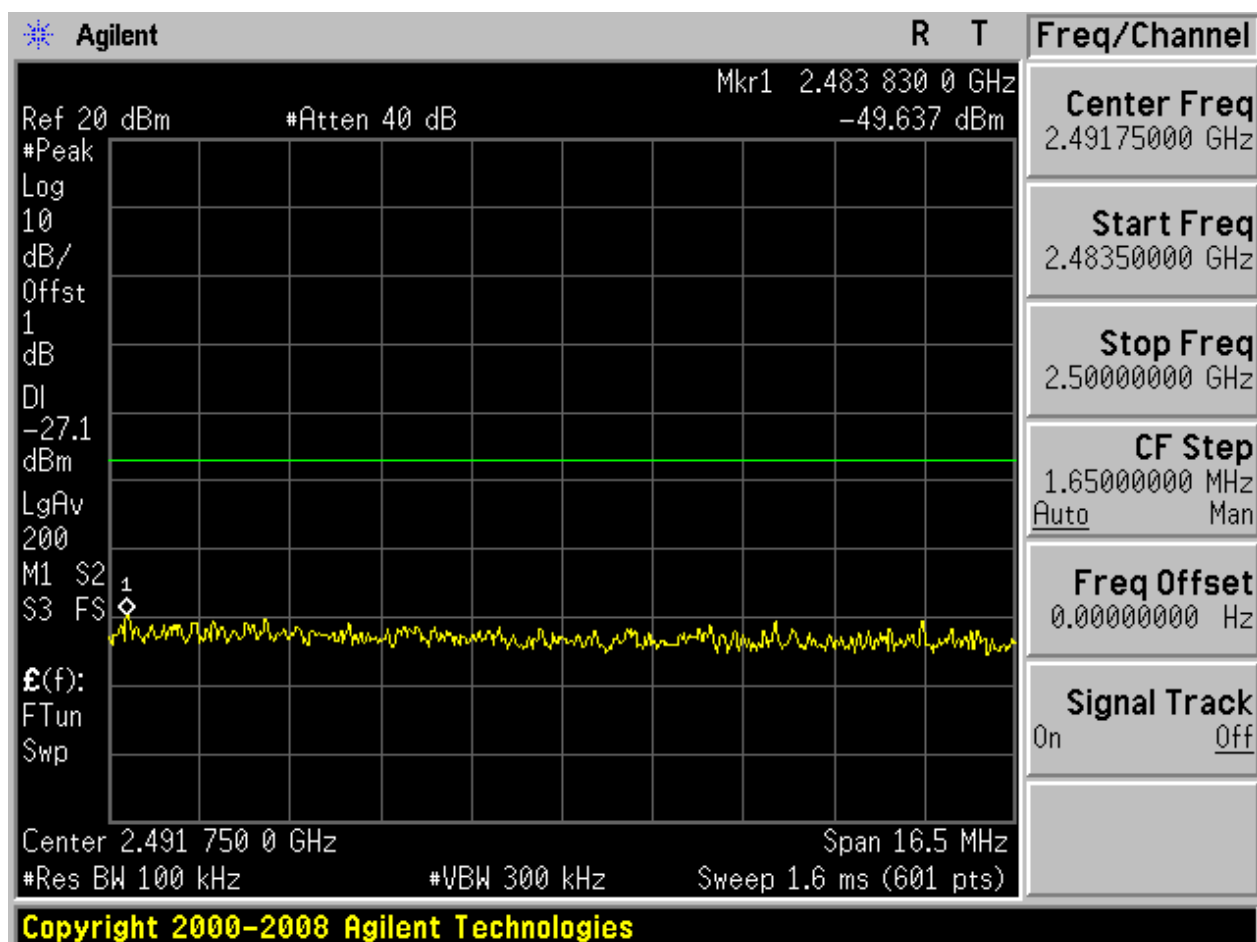

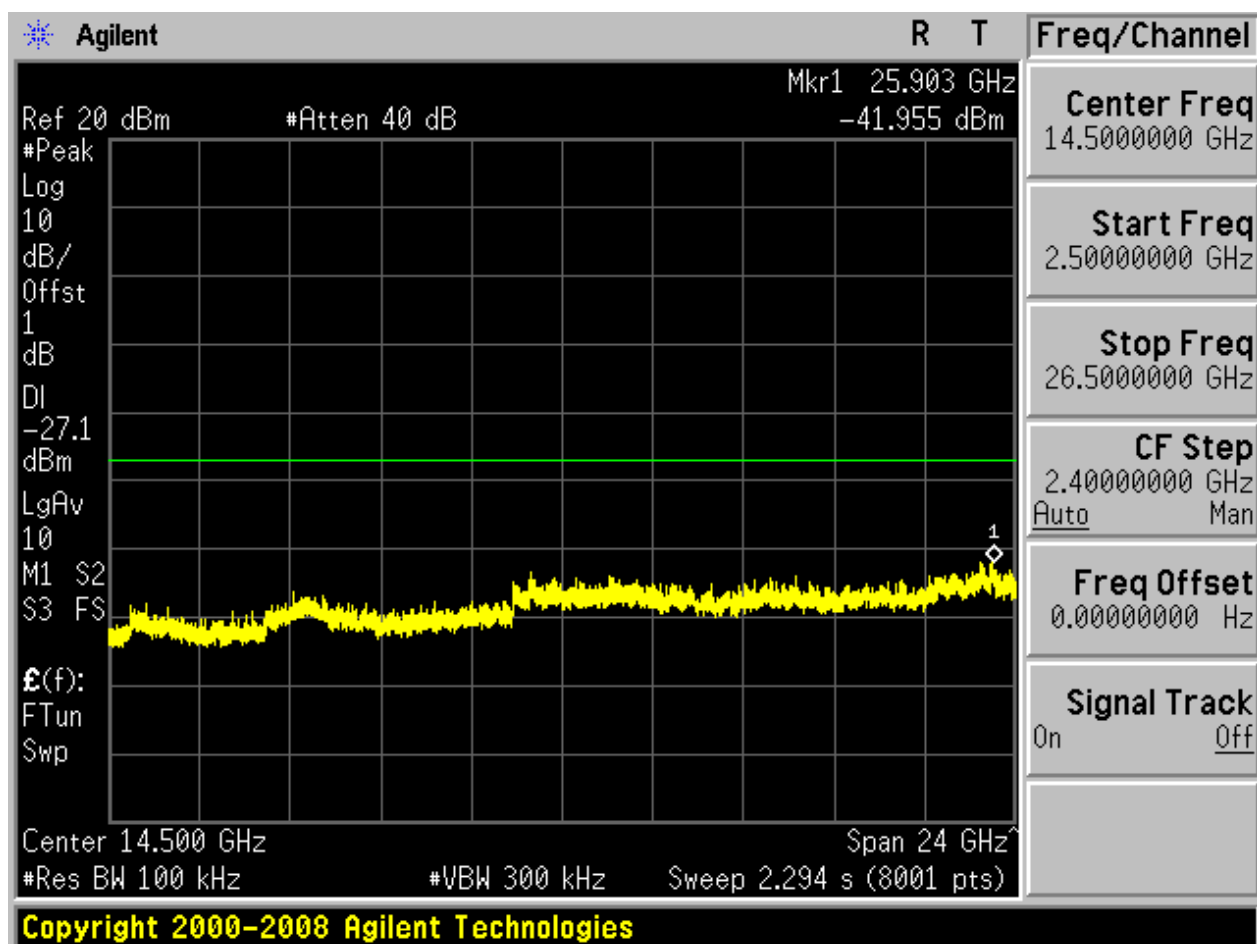


2.9 11G_M@Ant 1


Pref:

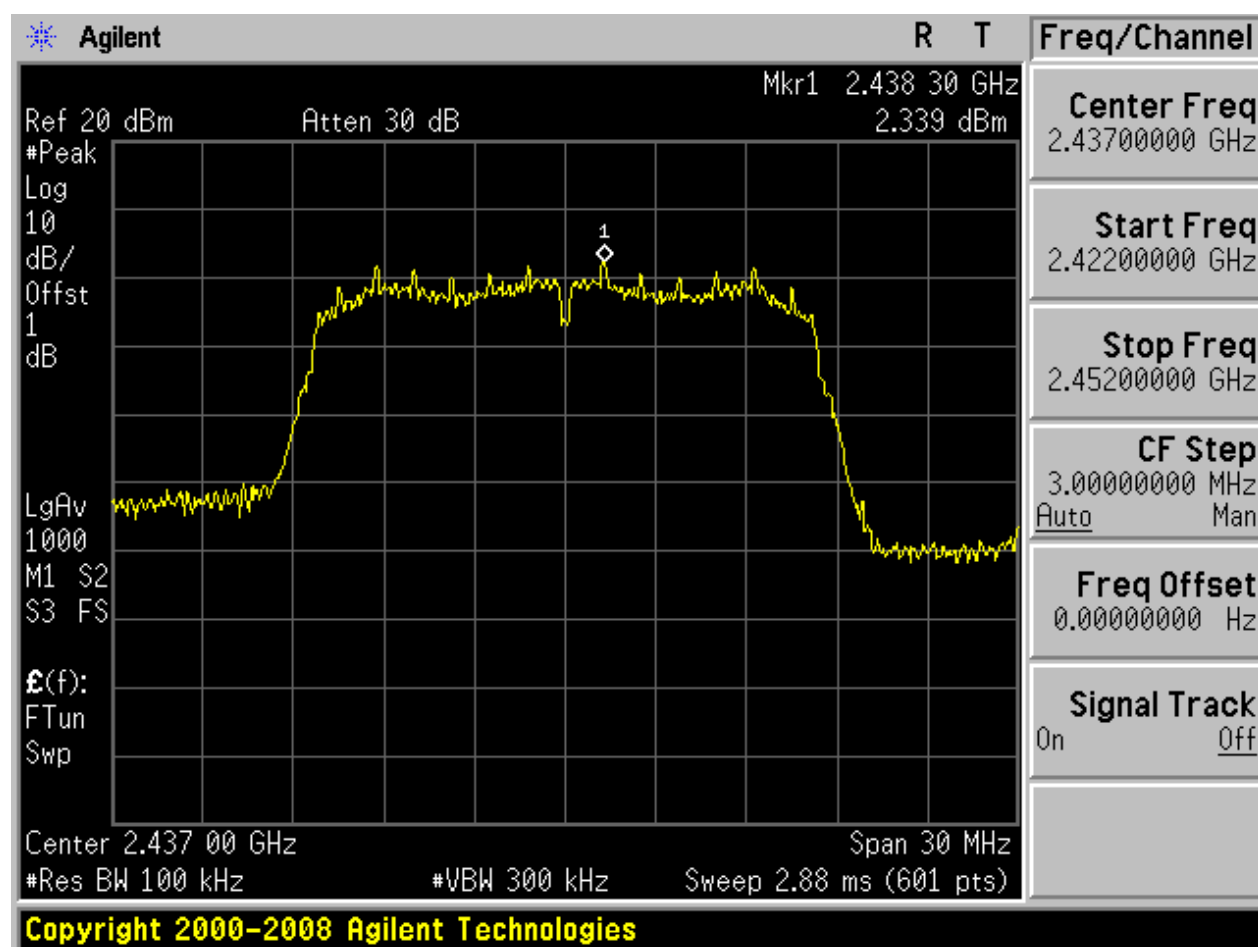






Puw:

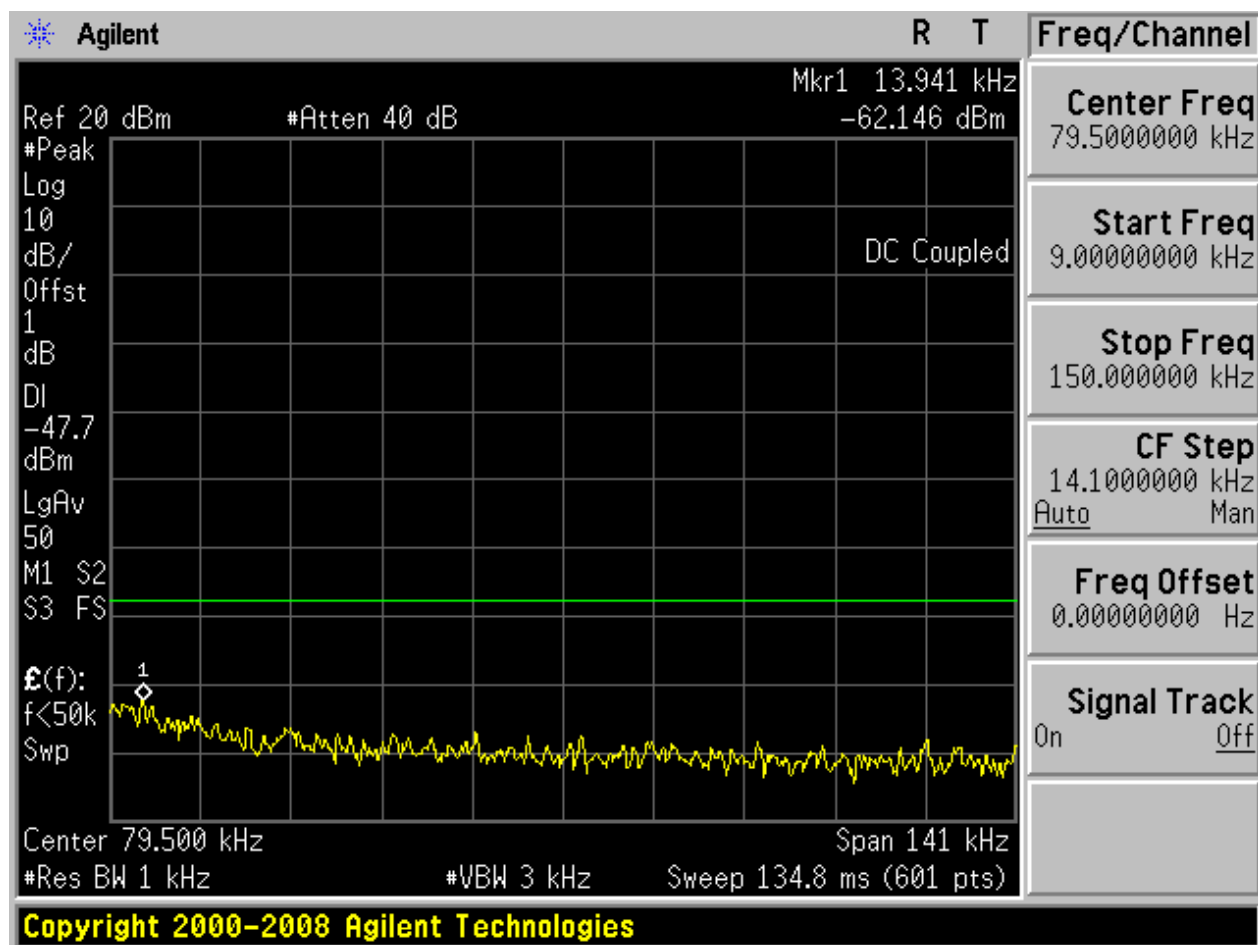


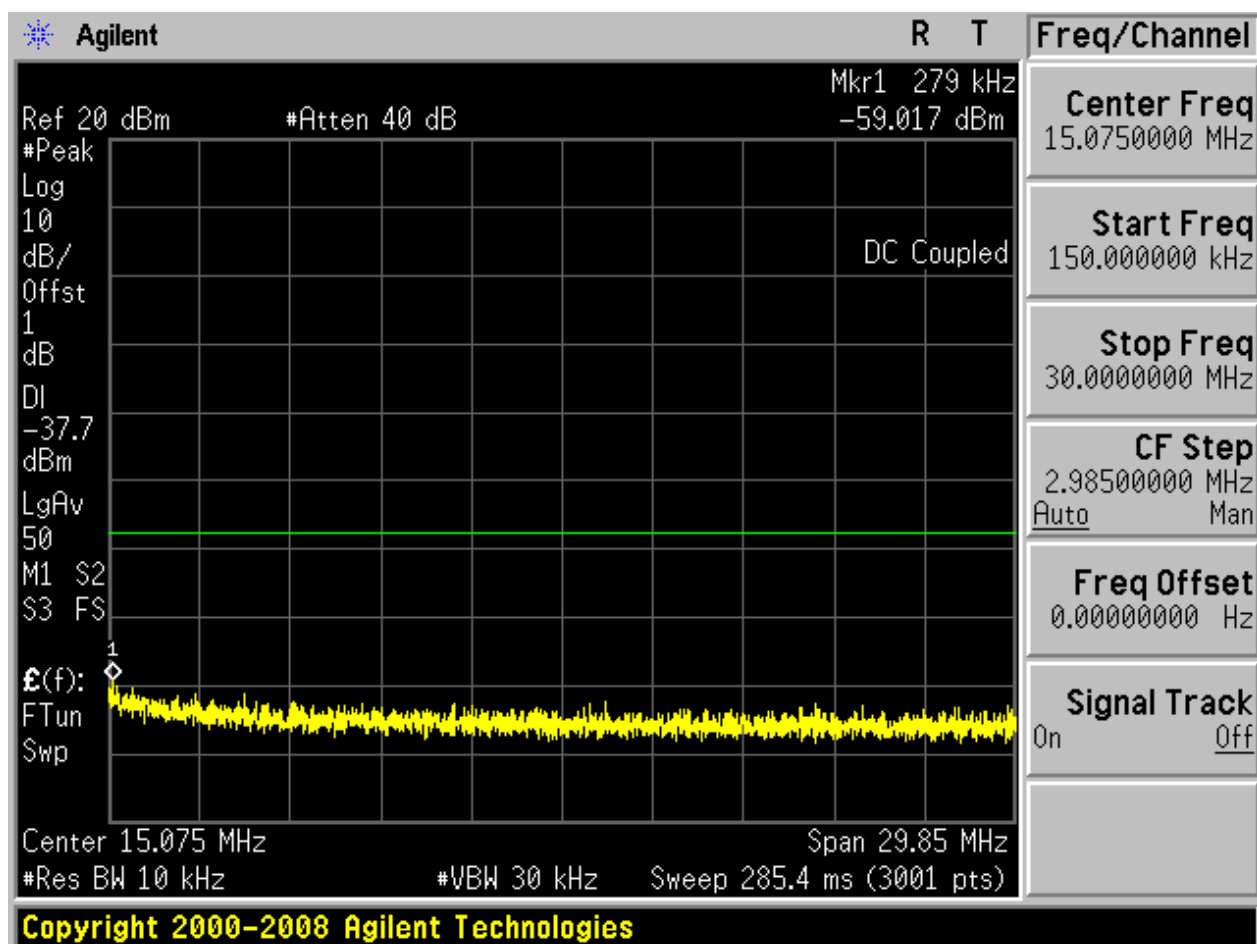

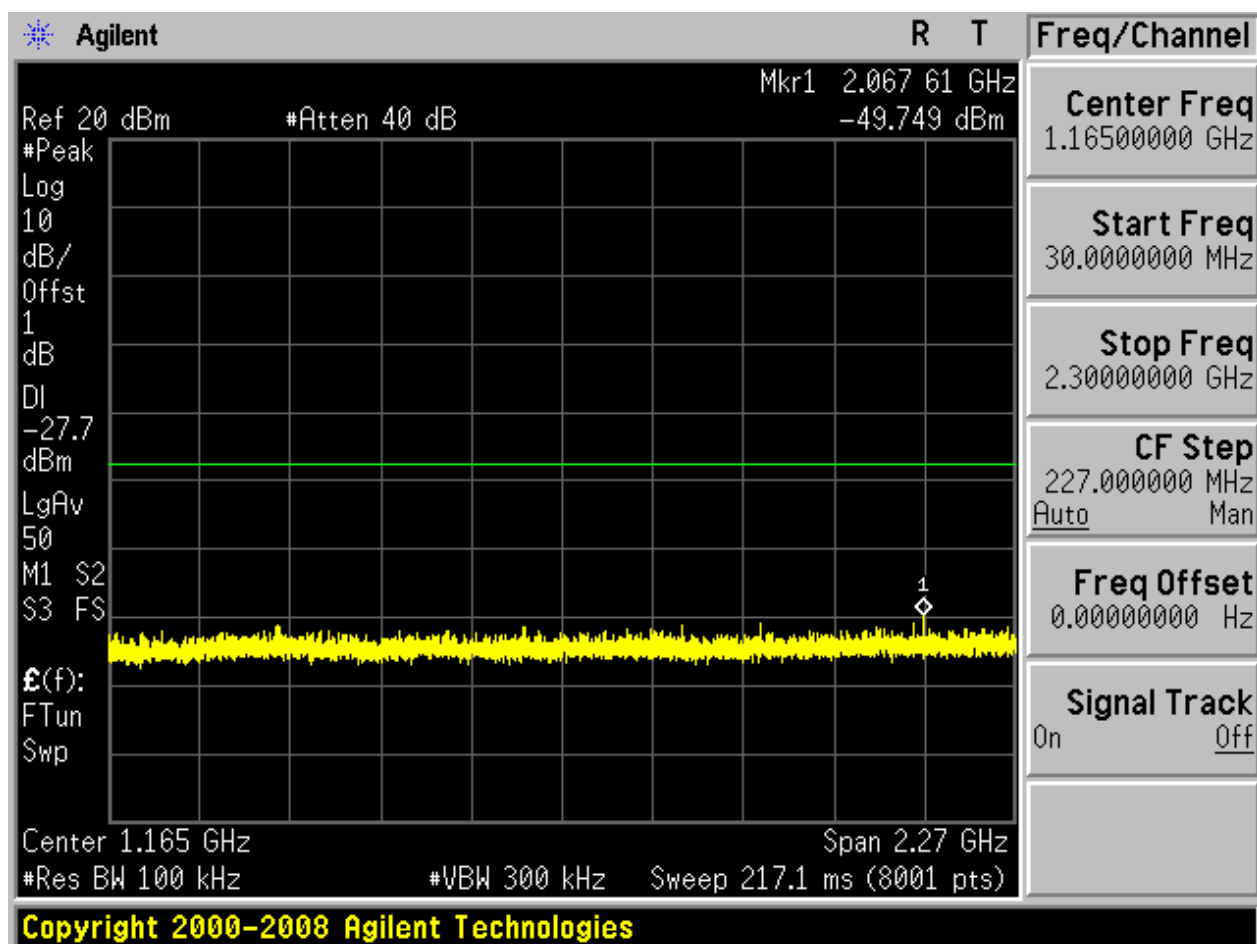

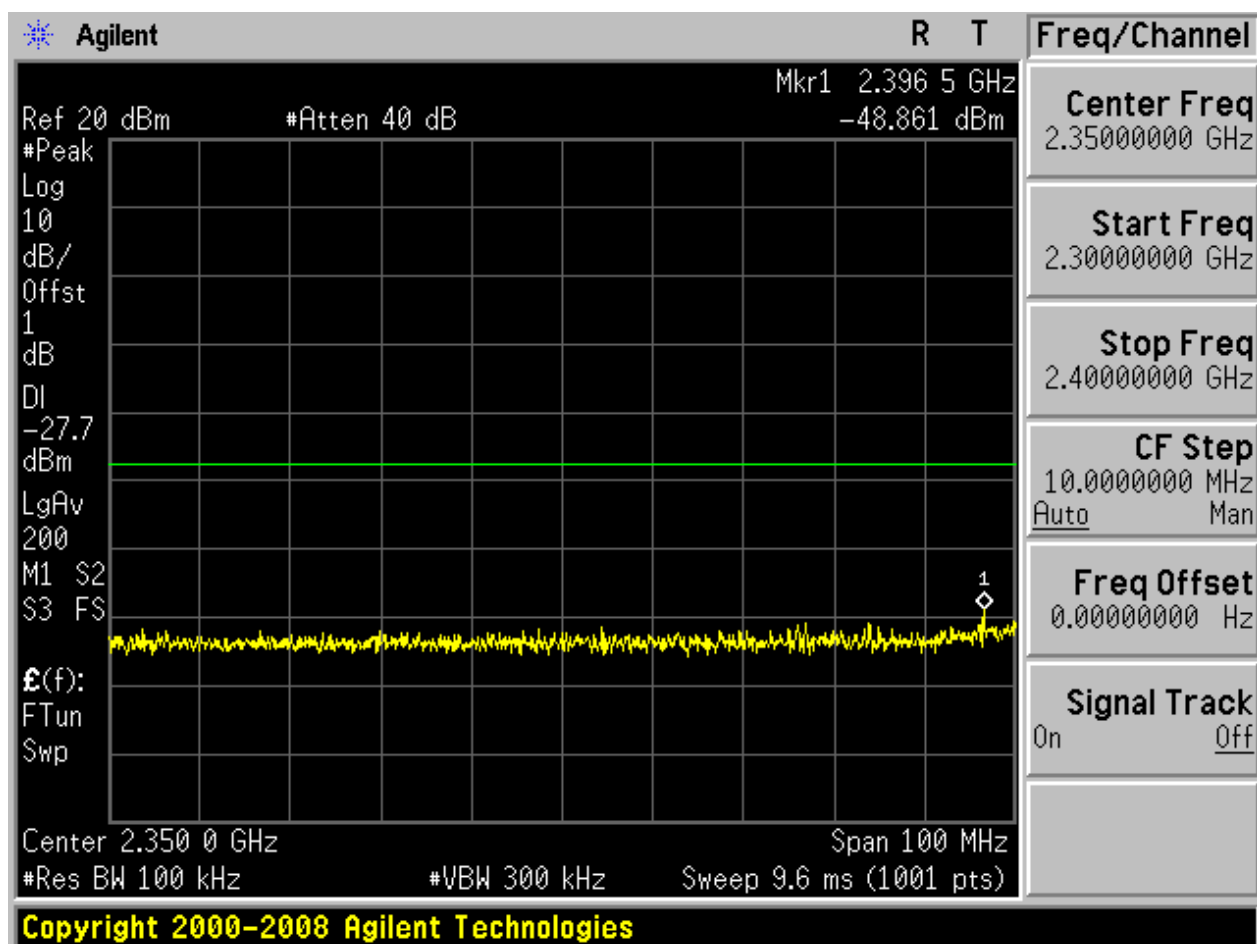


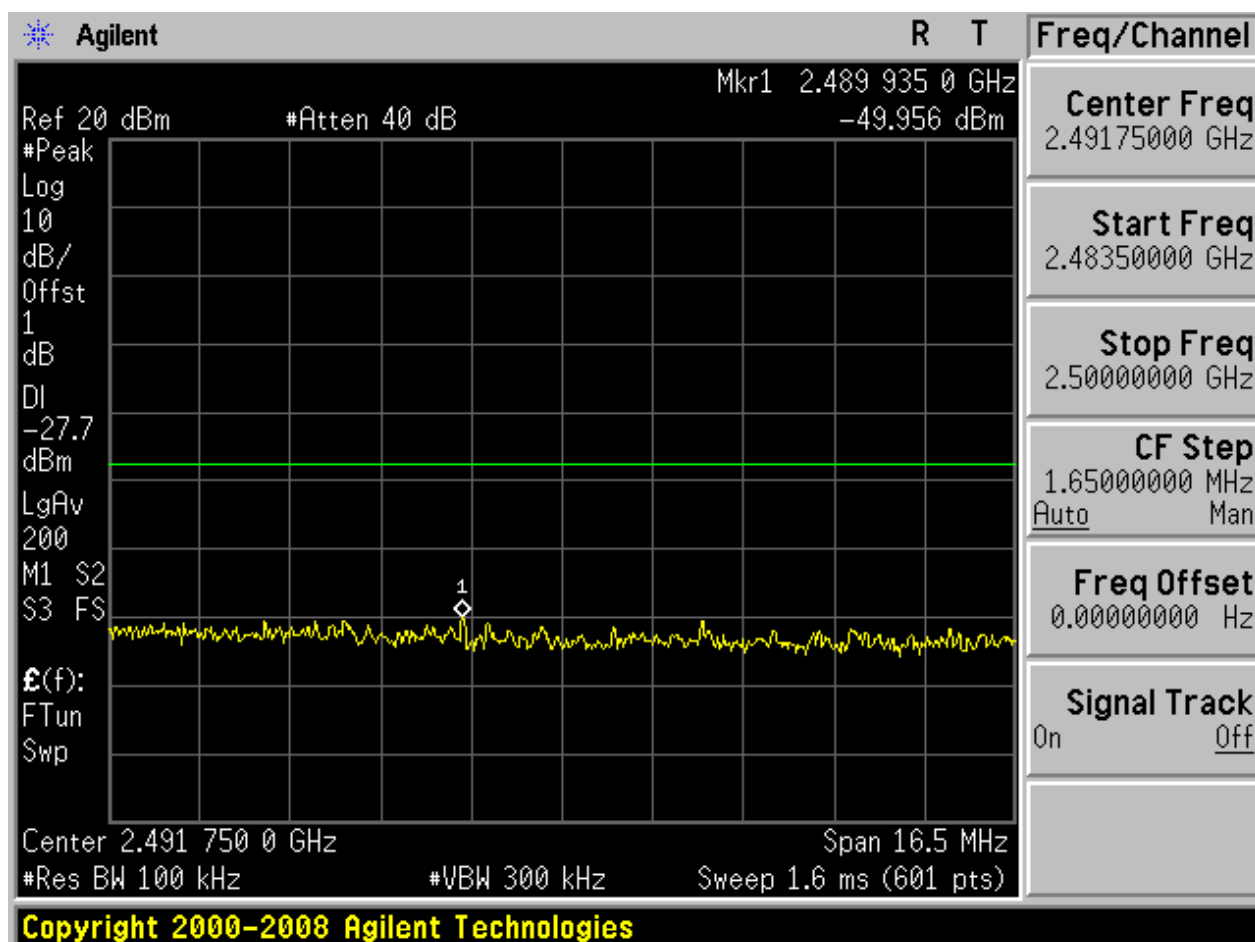

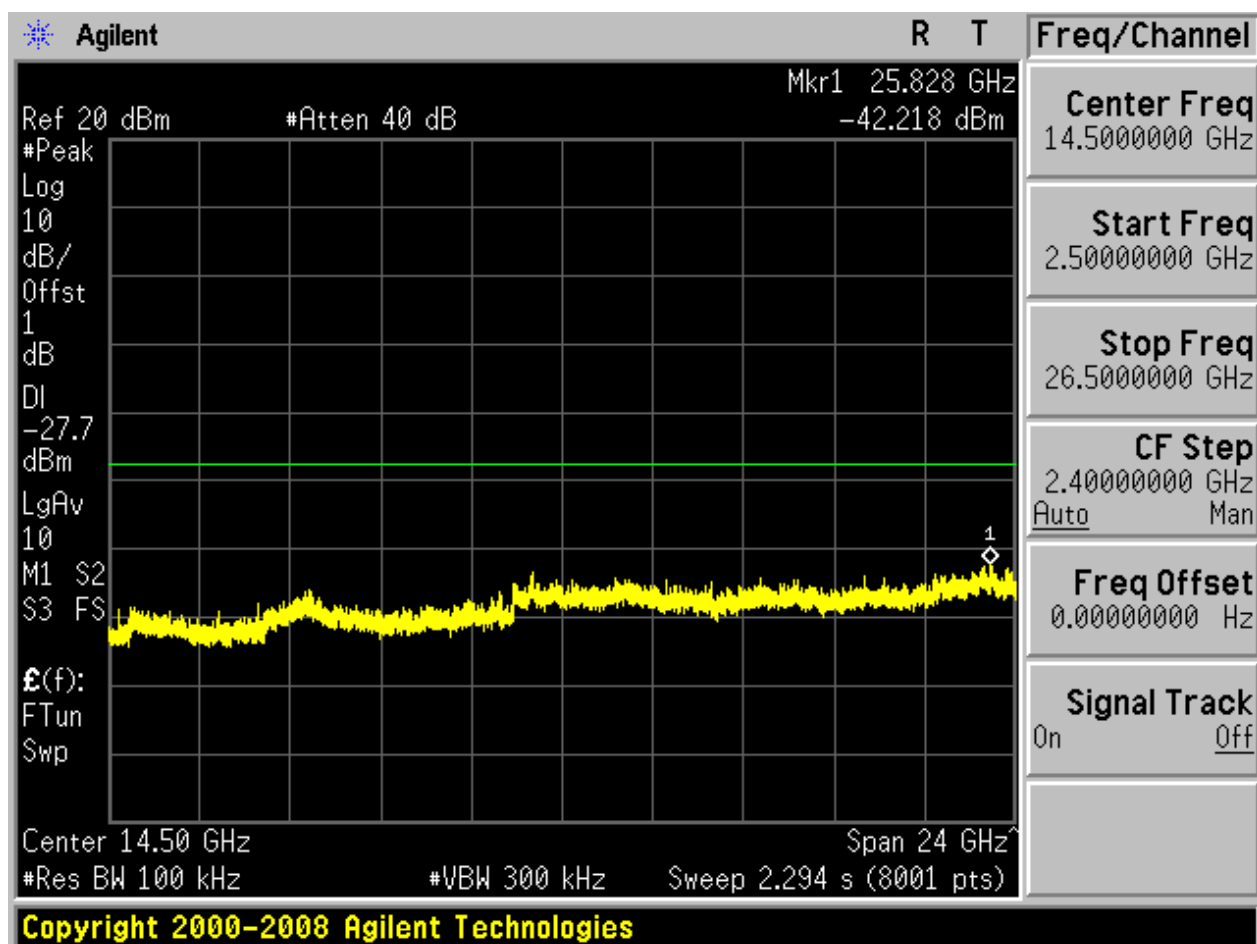


2.10 11G_M@Ant 2


Pref:

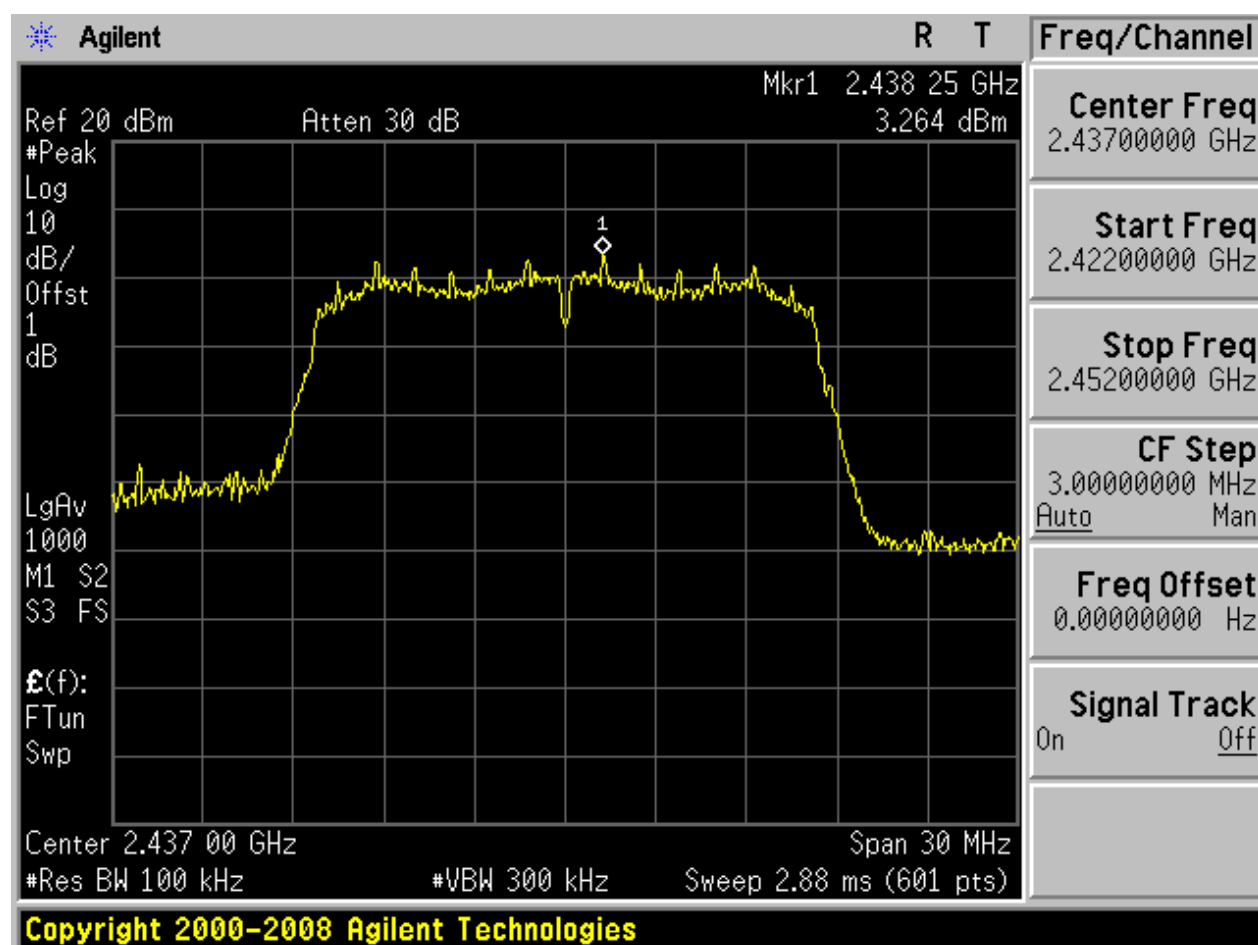






Puw:

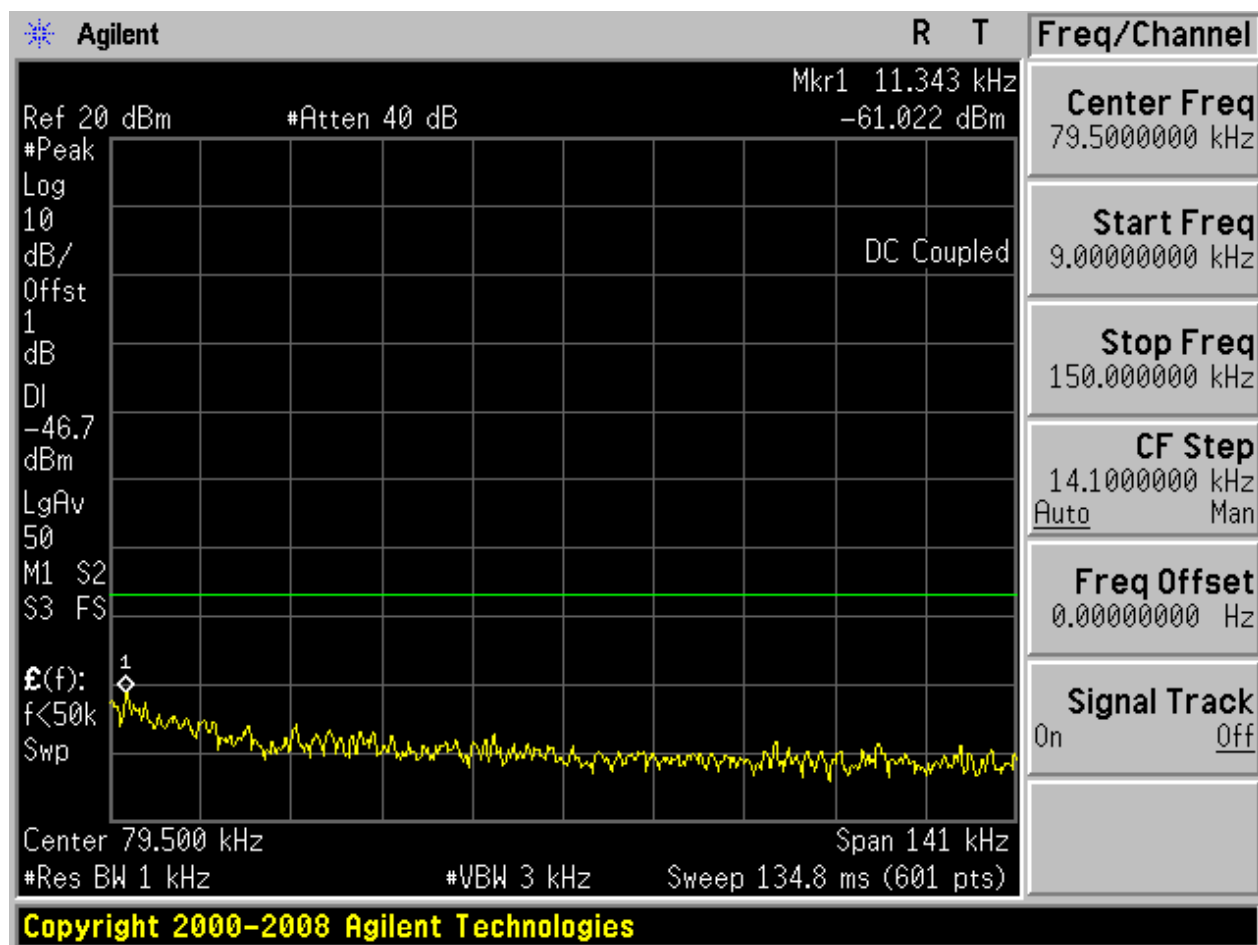


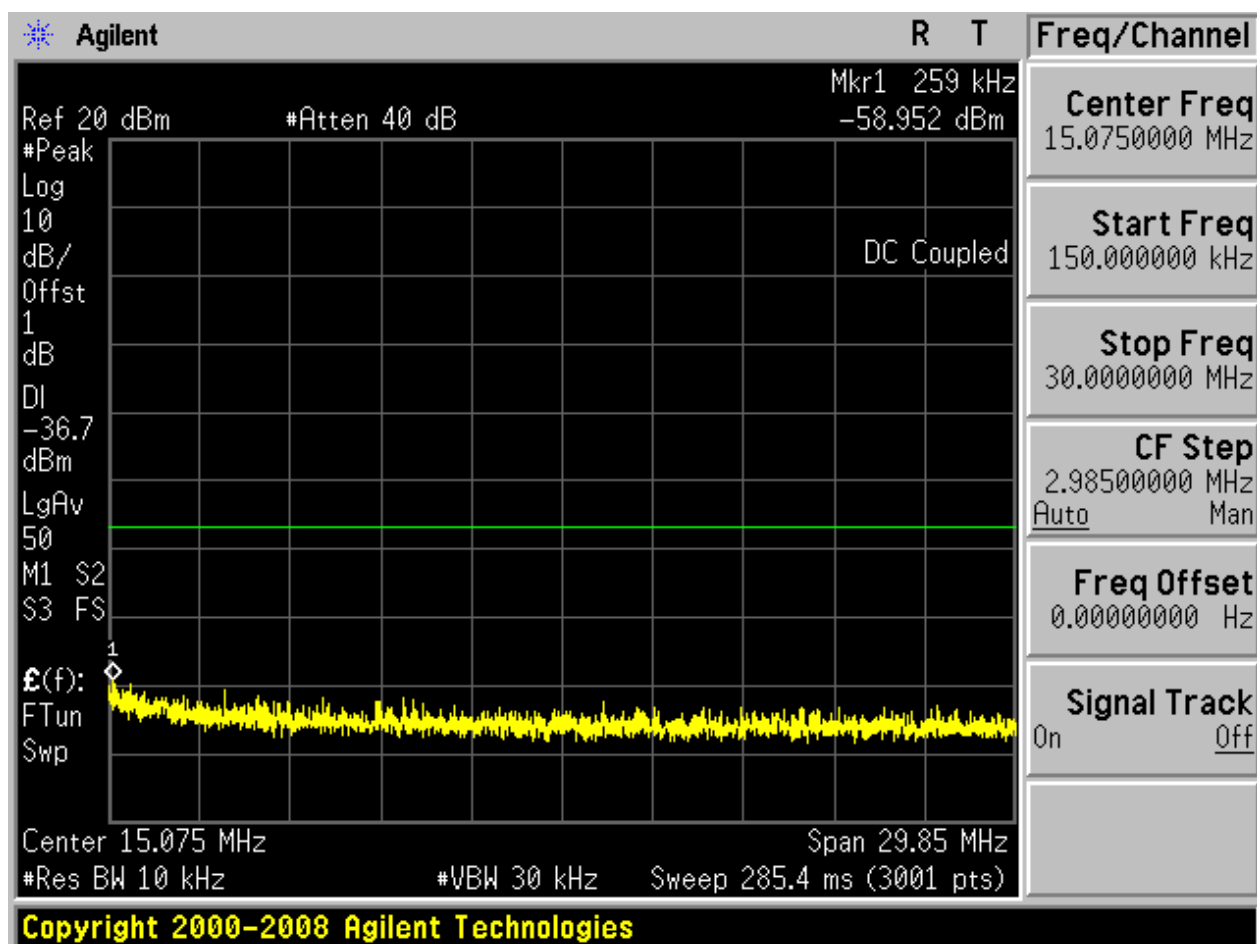

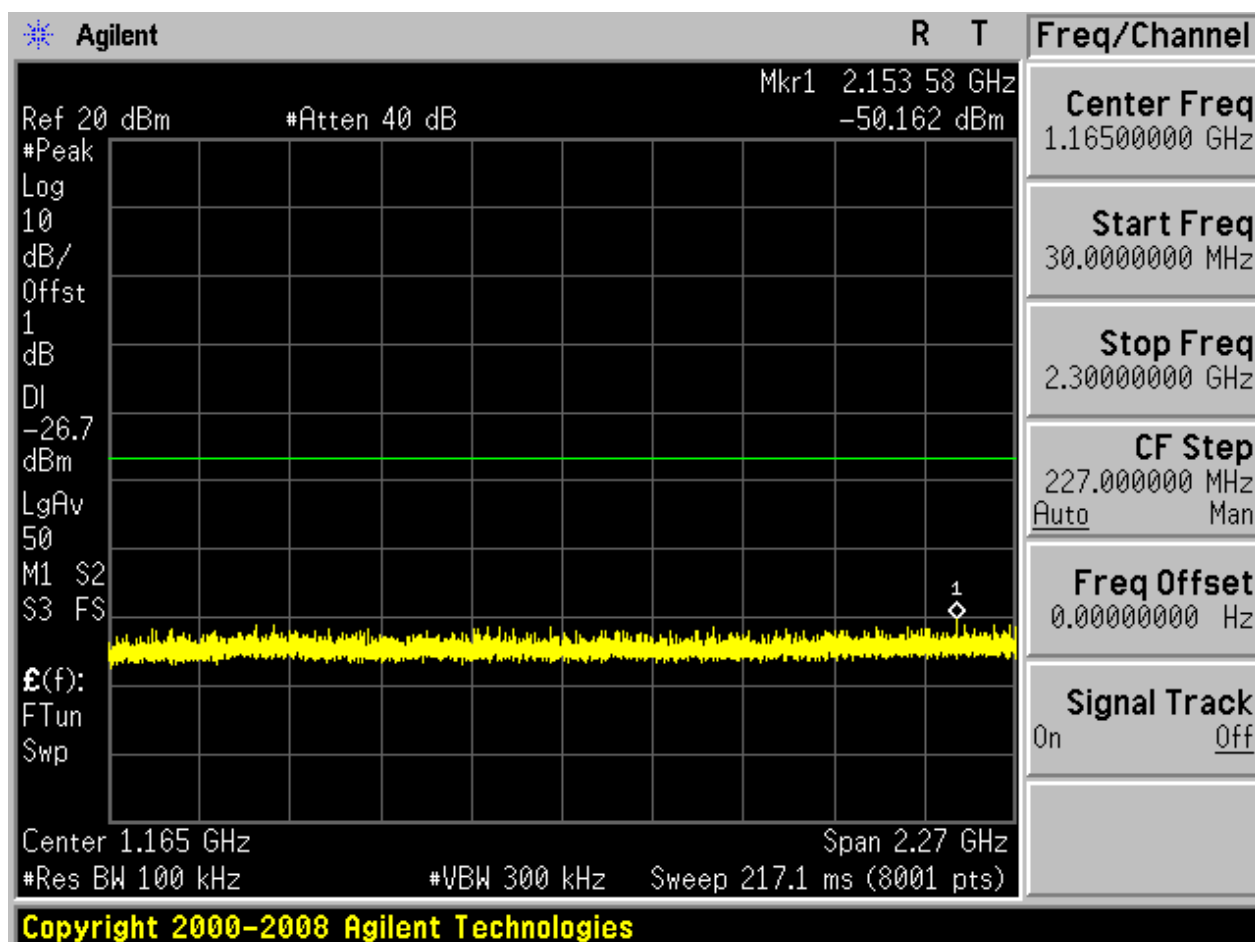

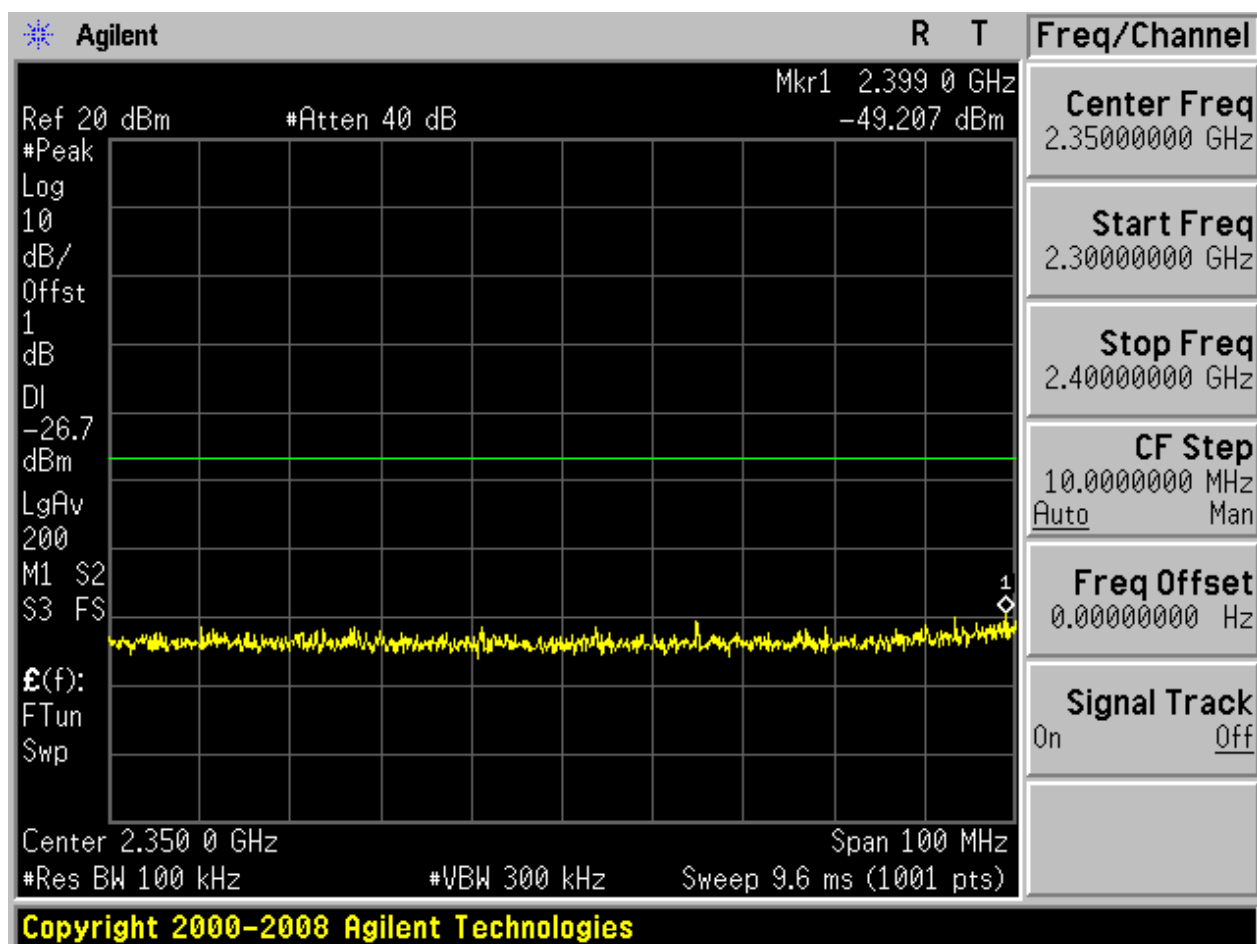


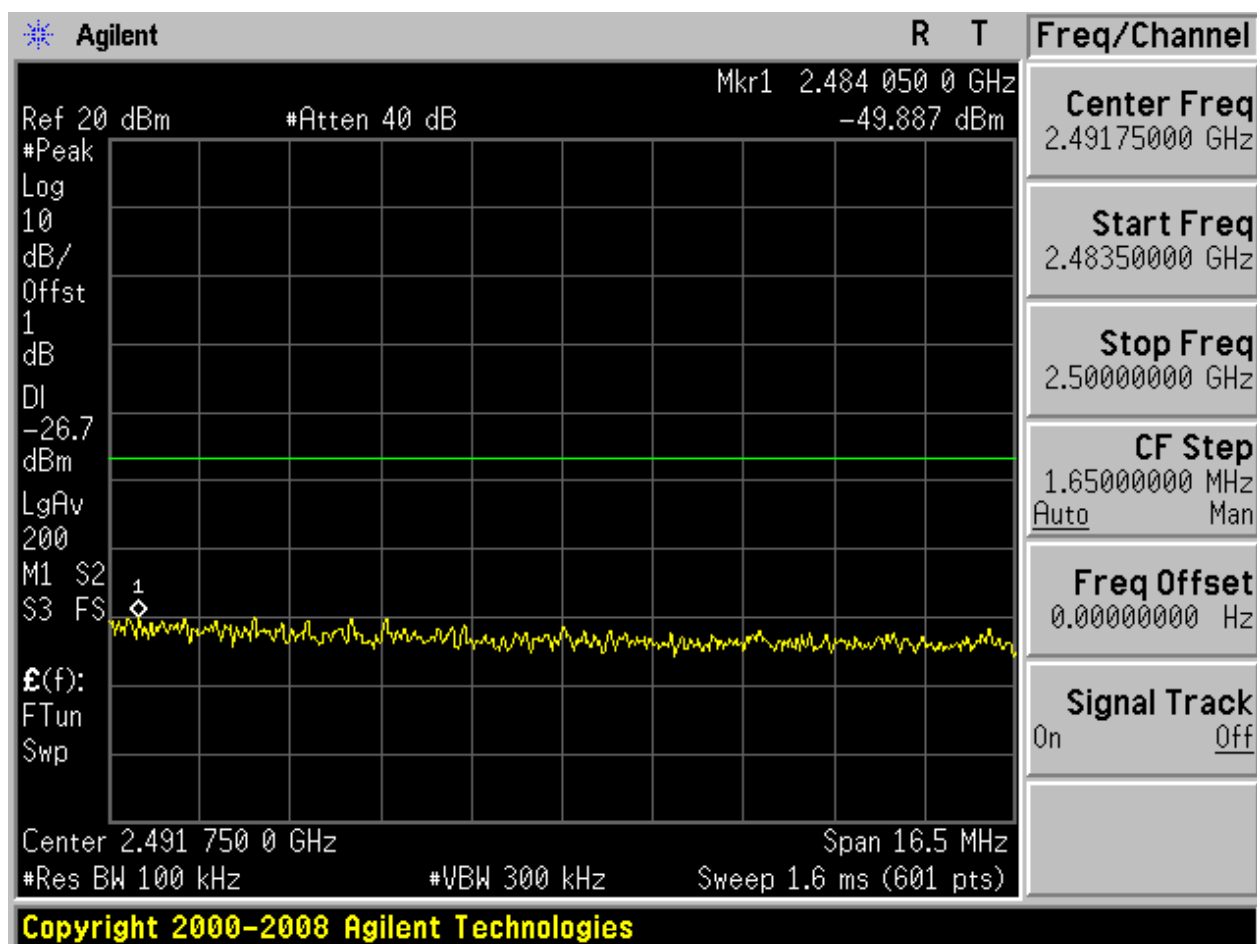

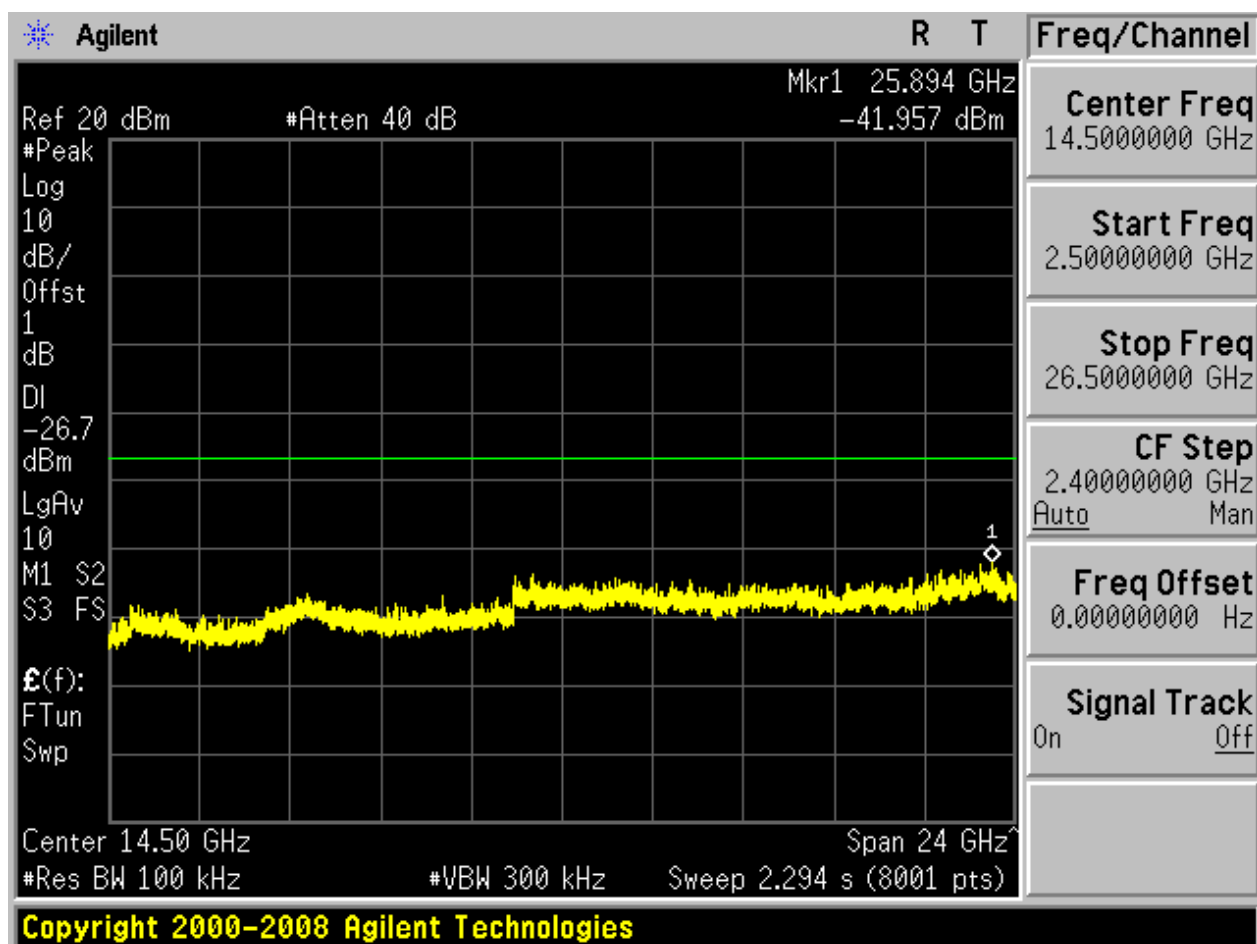


2.11 11G_H@Ant 1


Pref:

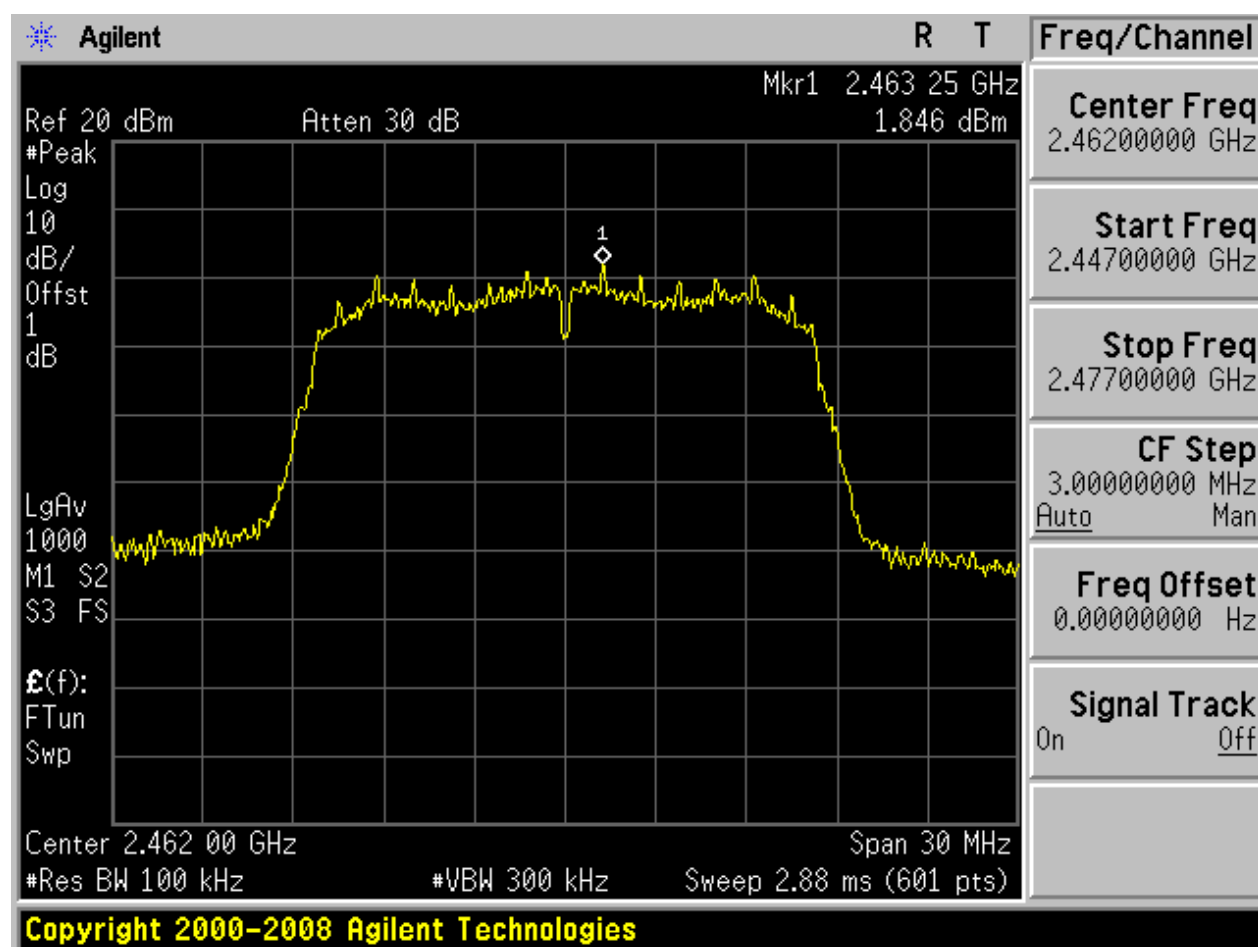






Puw:

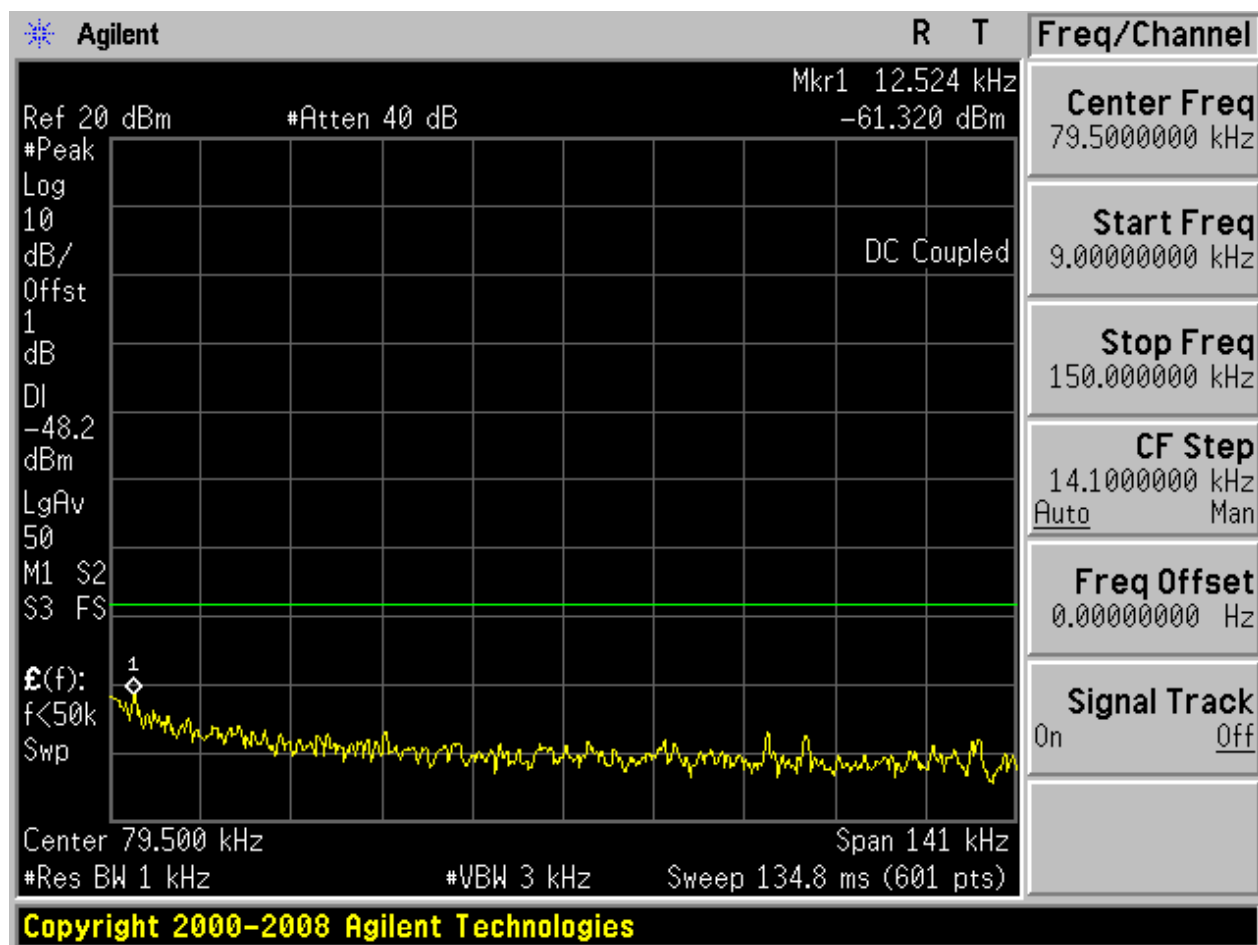


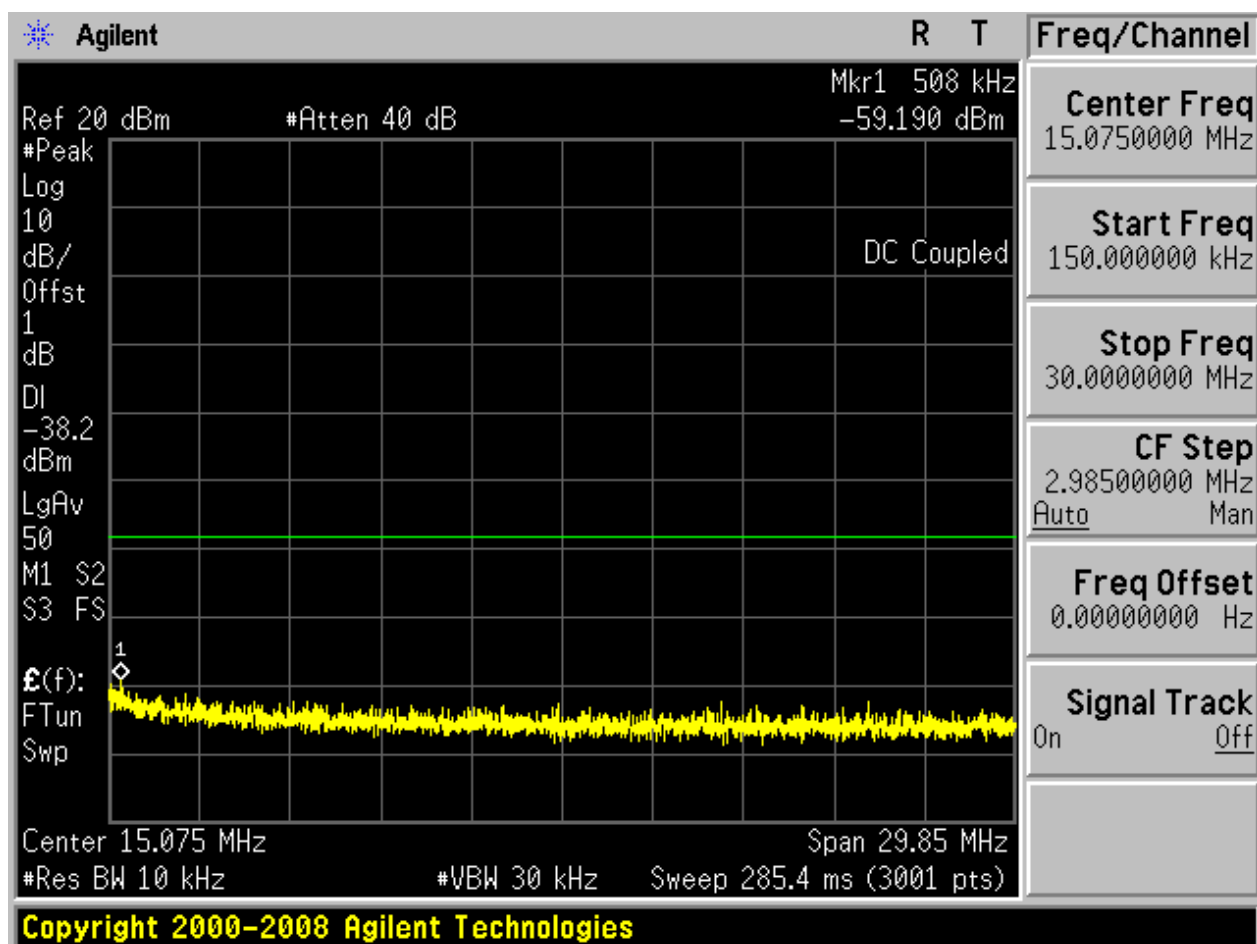

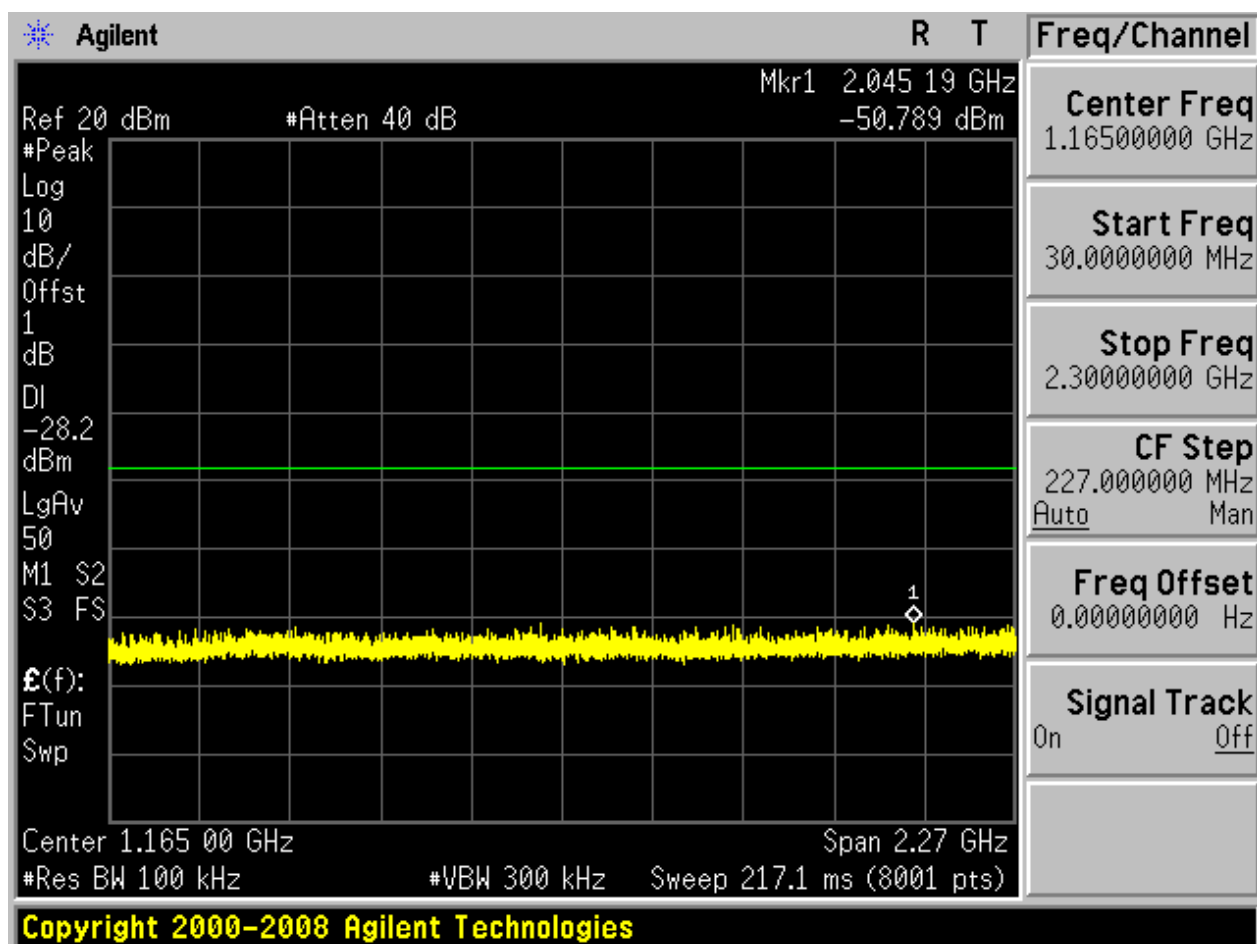

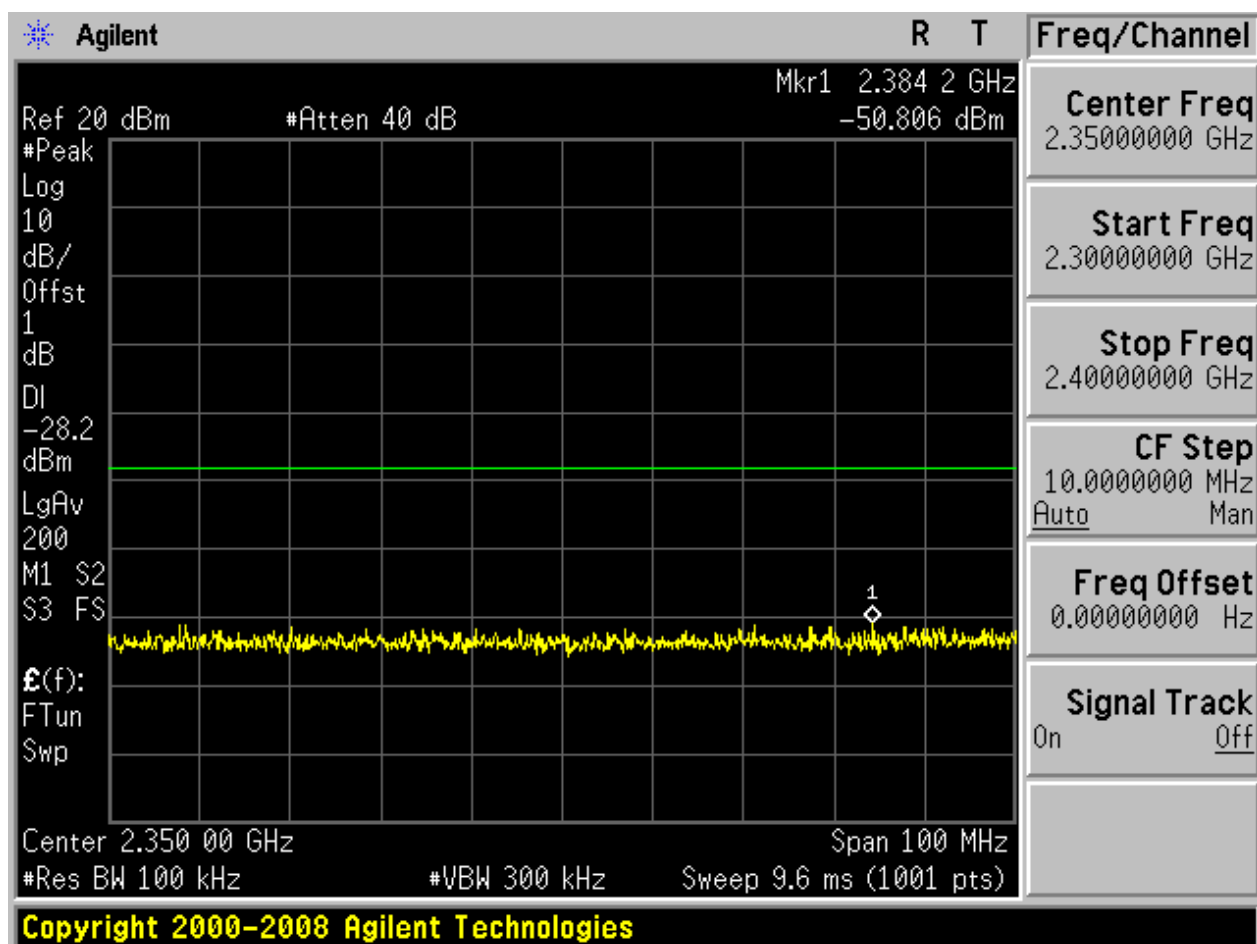


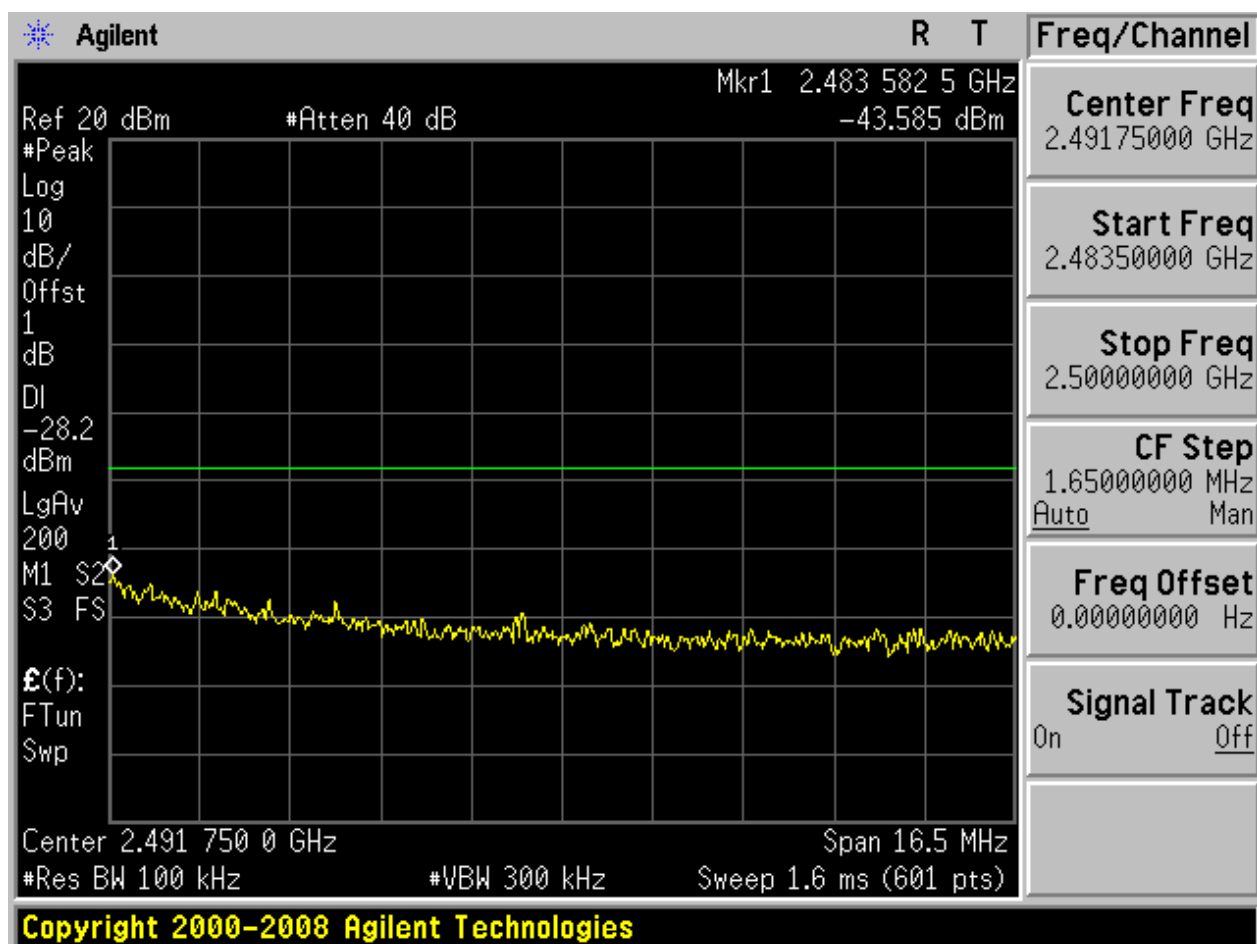

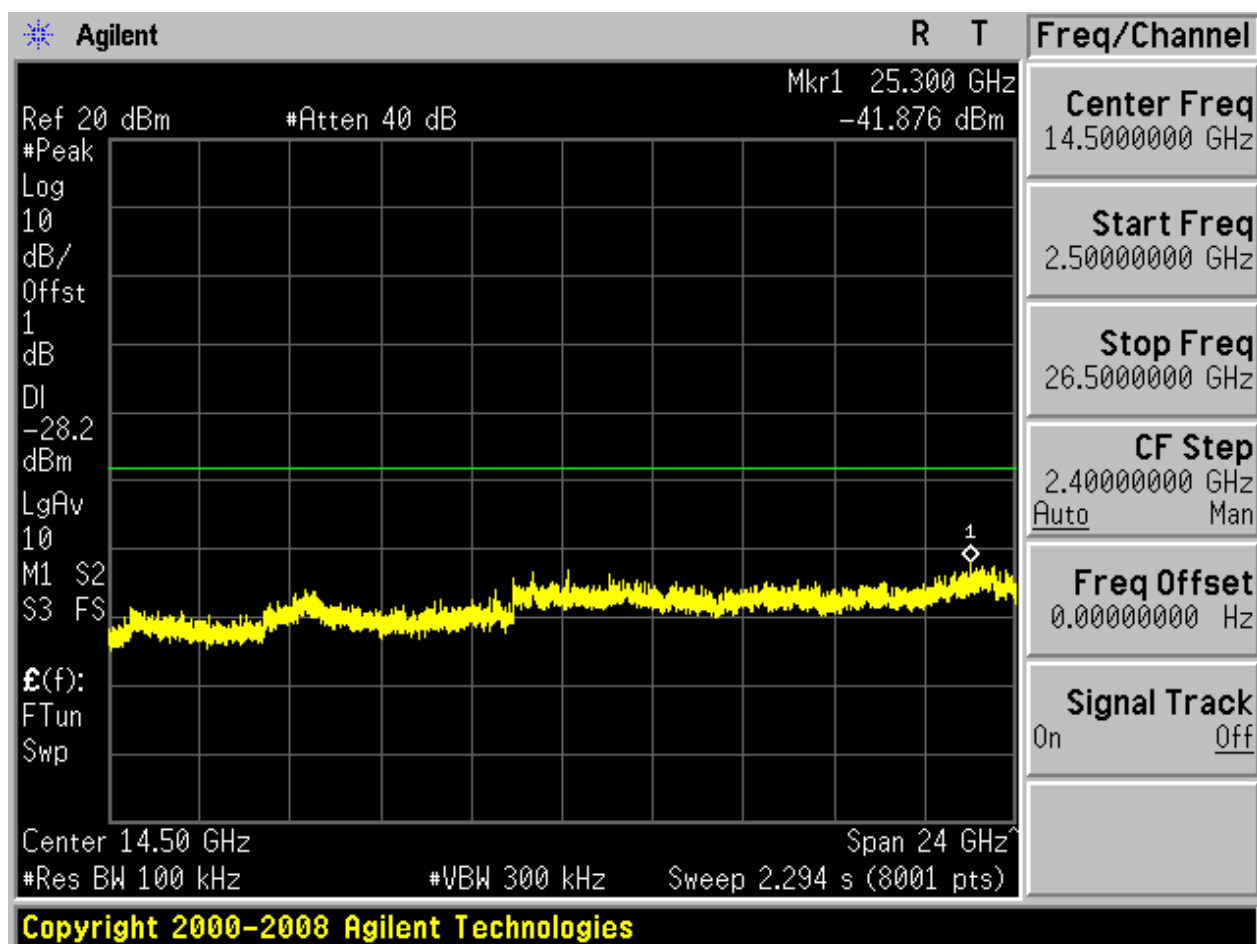


2.12 11G_H@Ant 2


Pref:

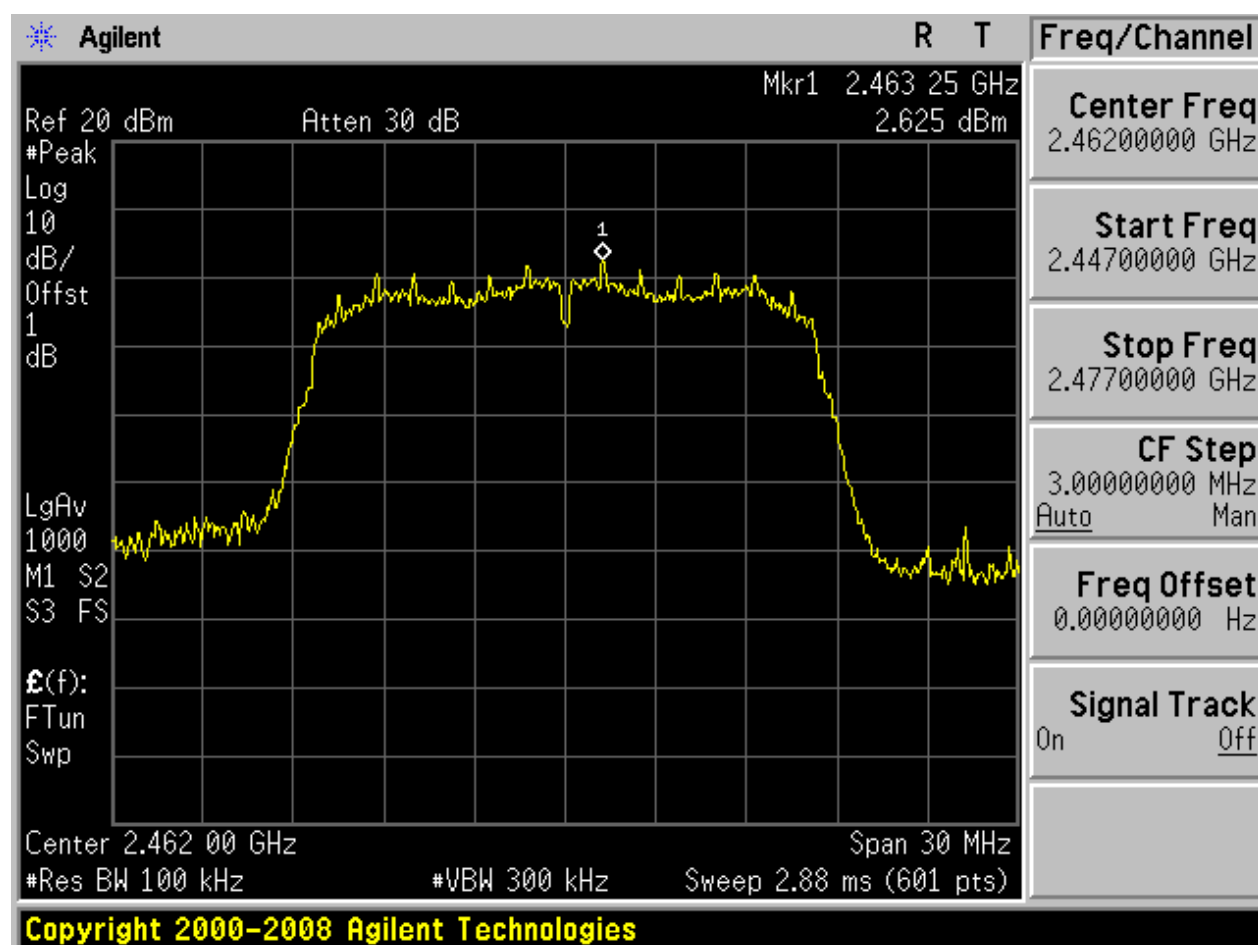






Puw:

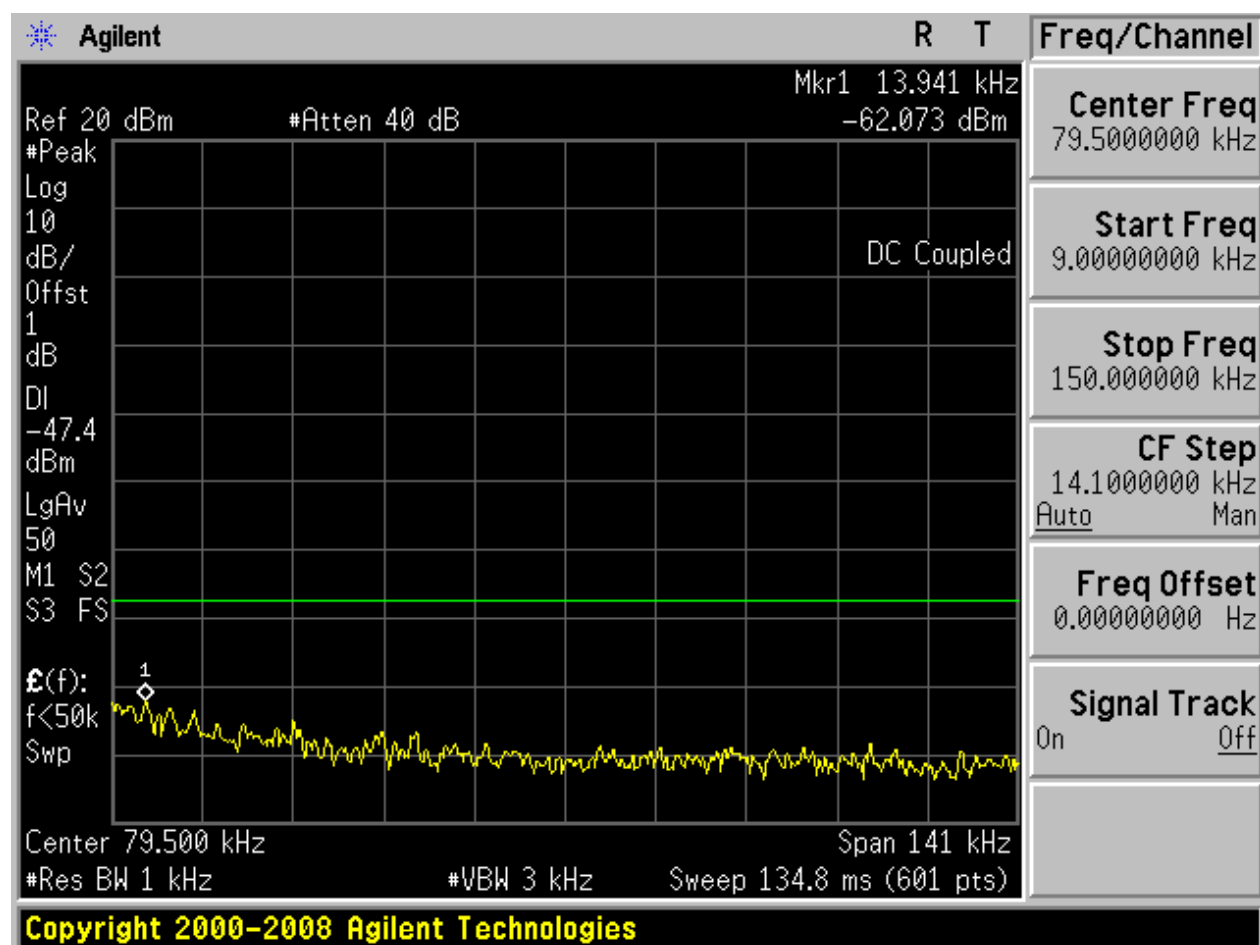


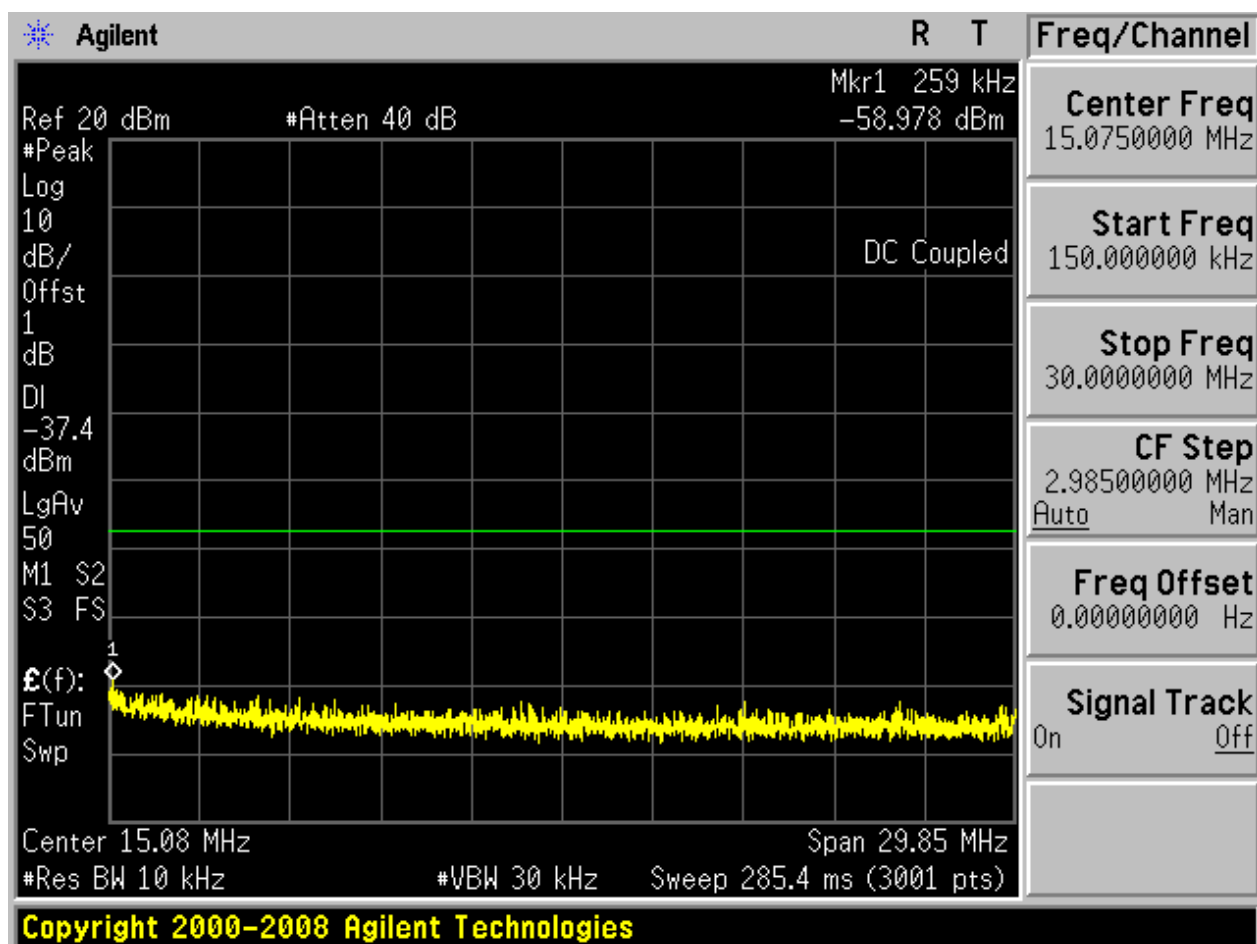

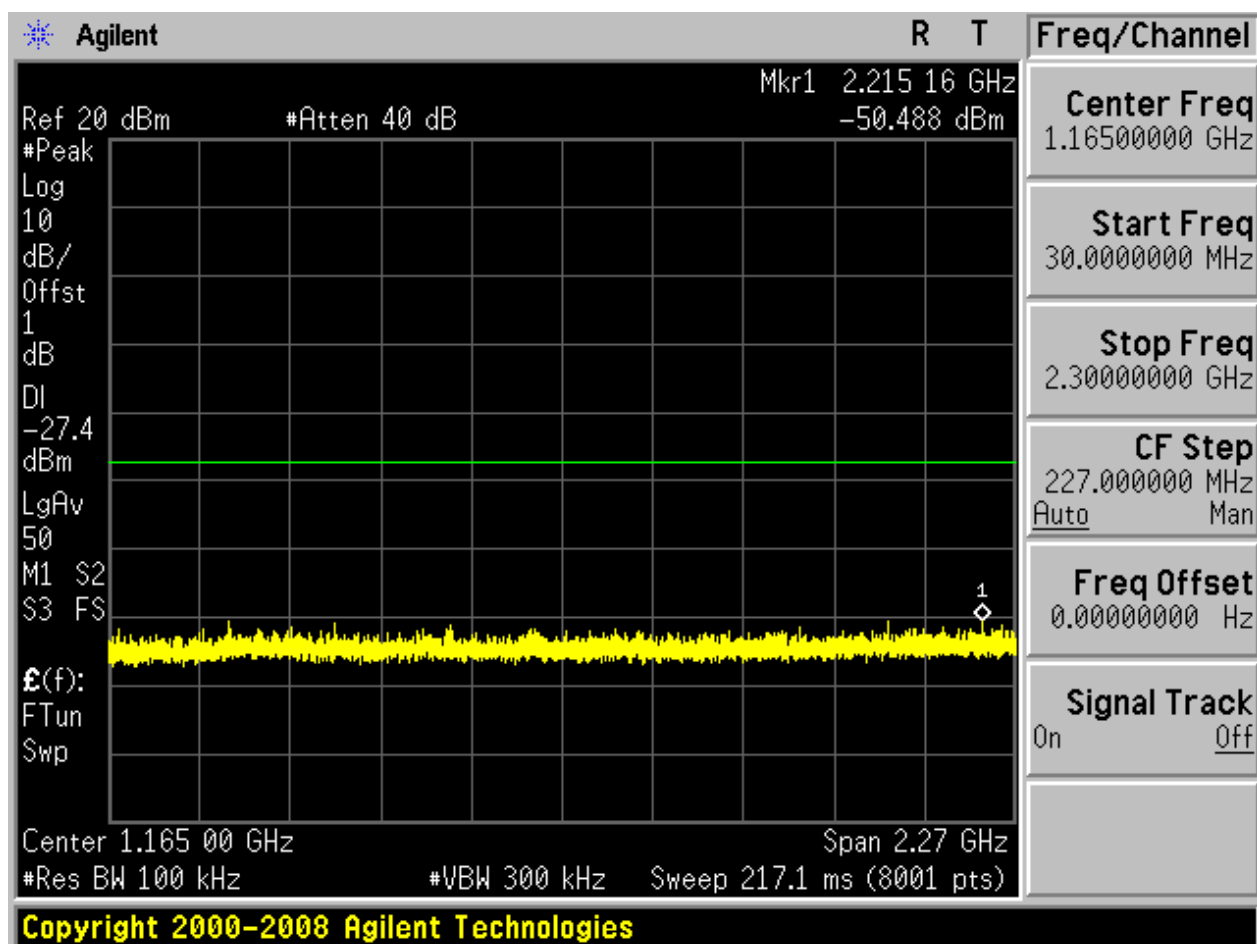

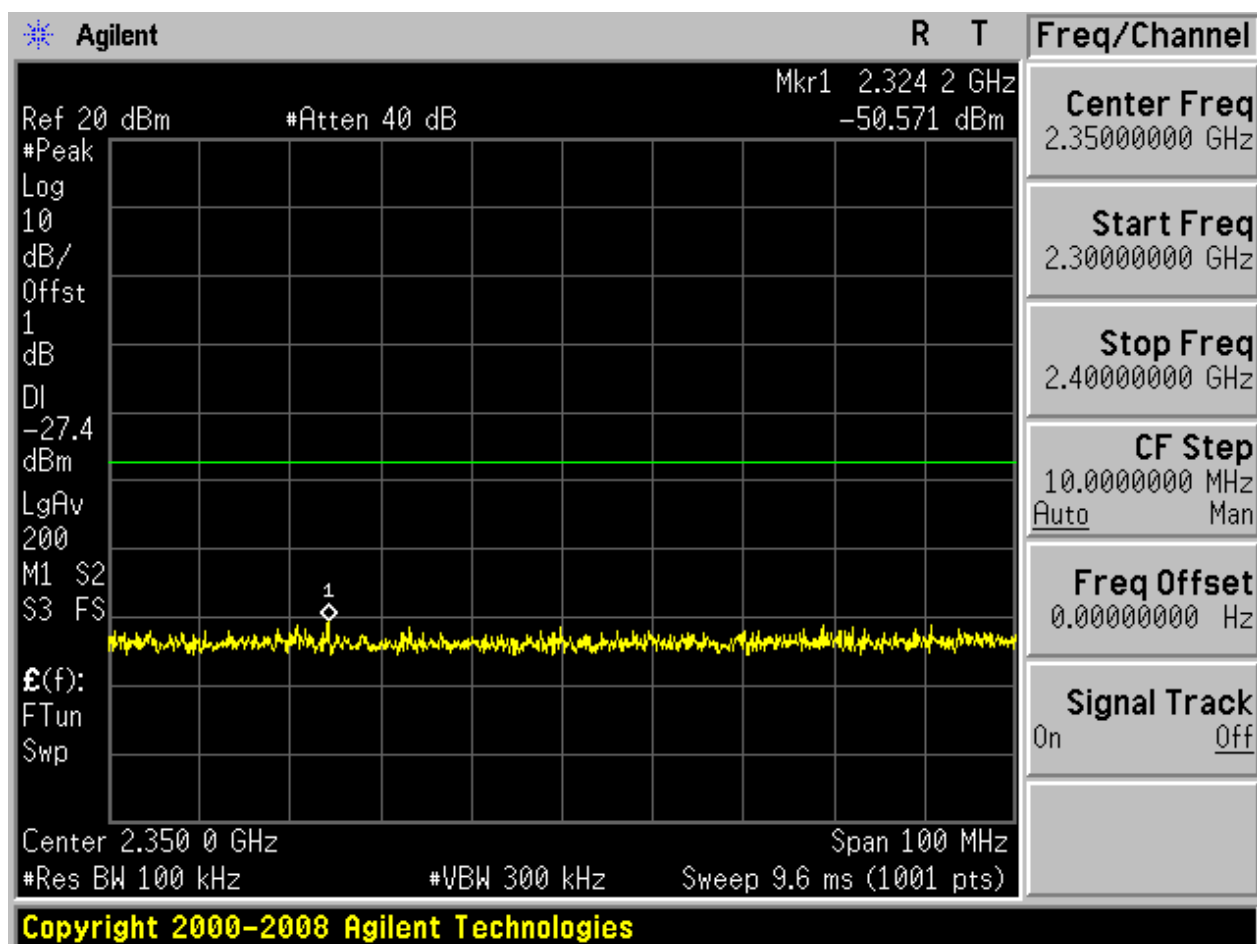

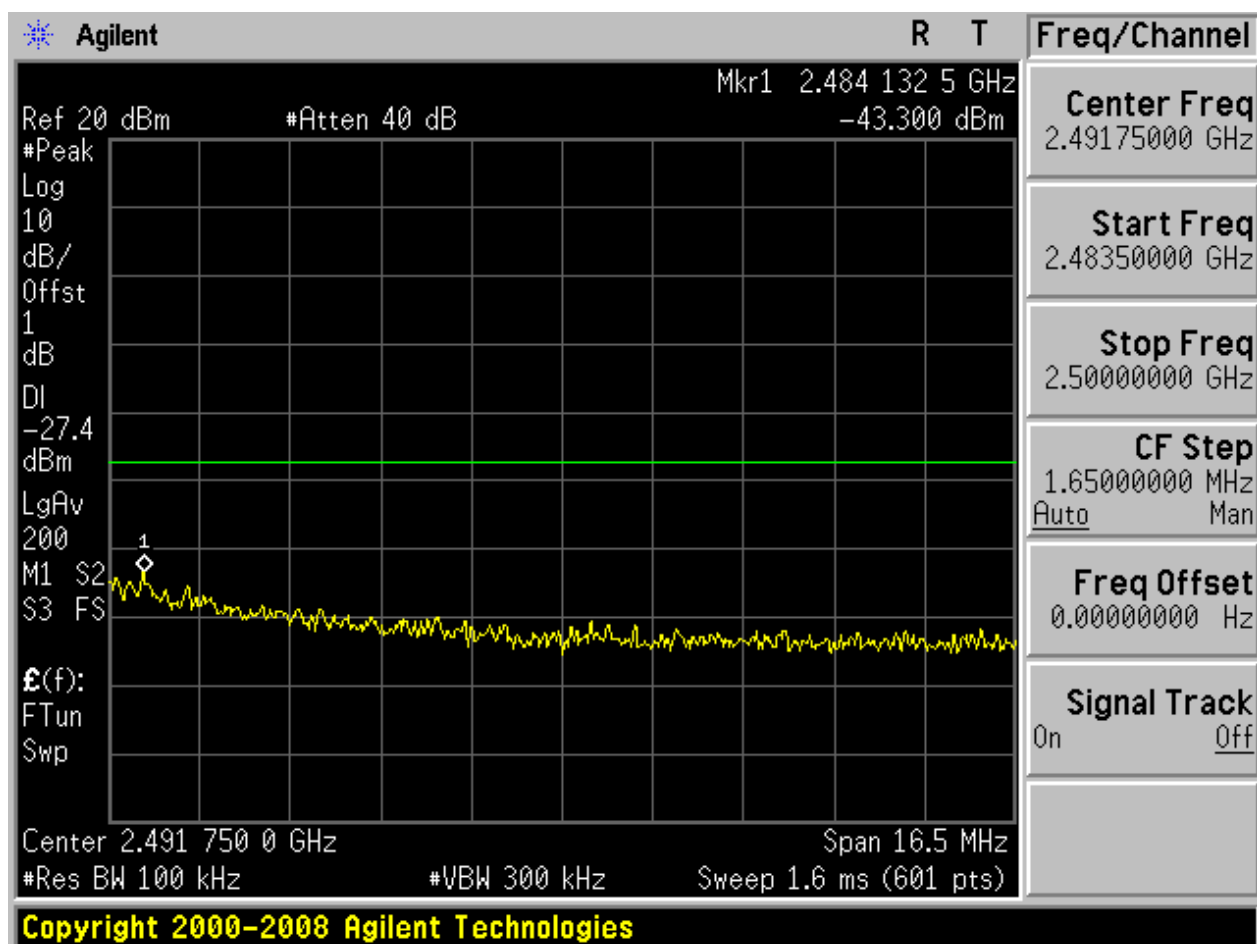


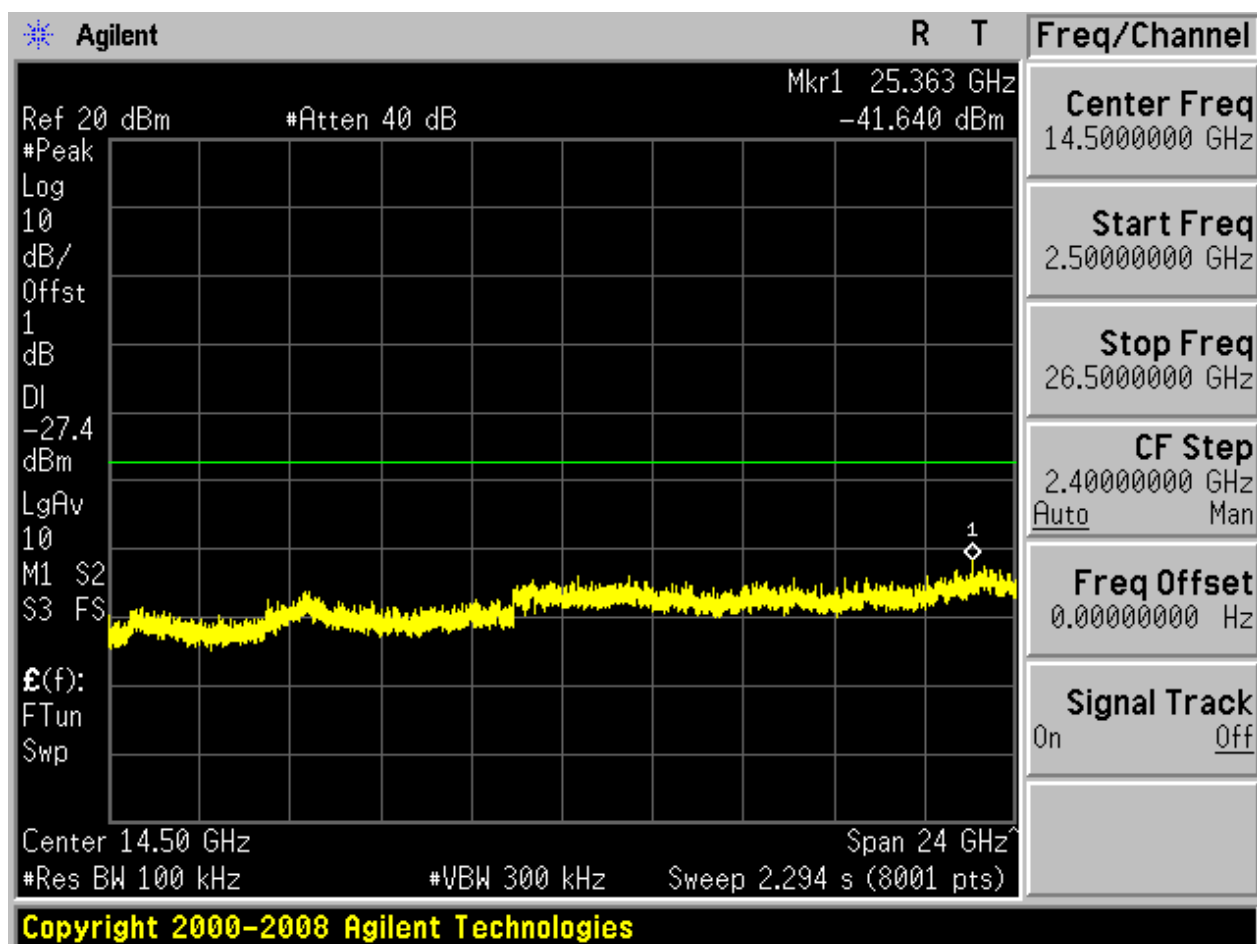




2.13 11N20_L@Ant 1


Pref:

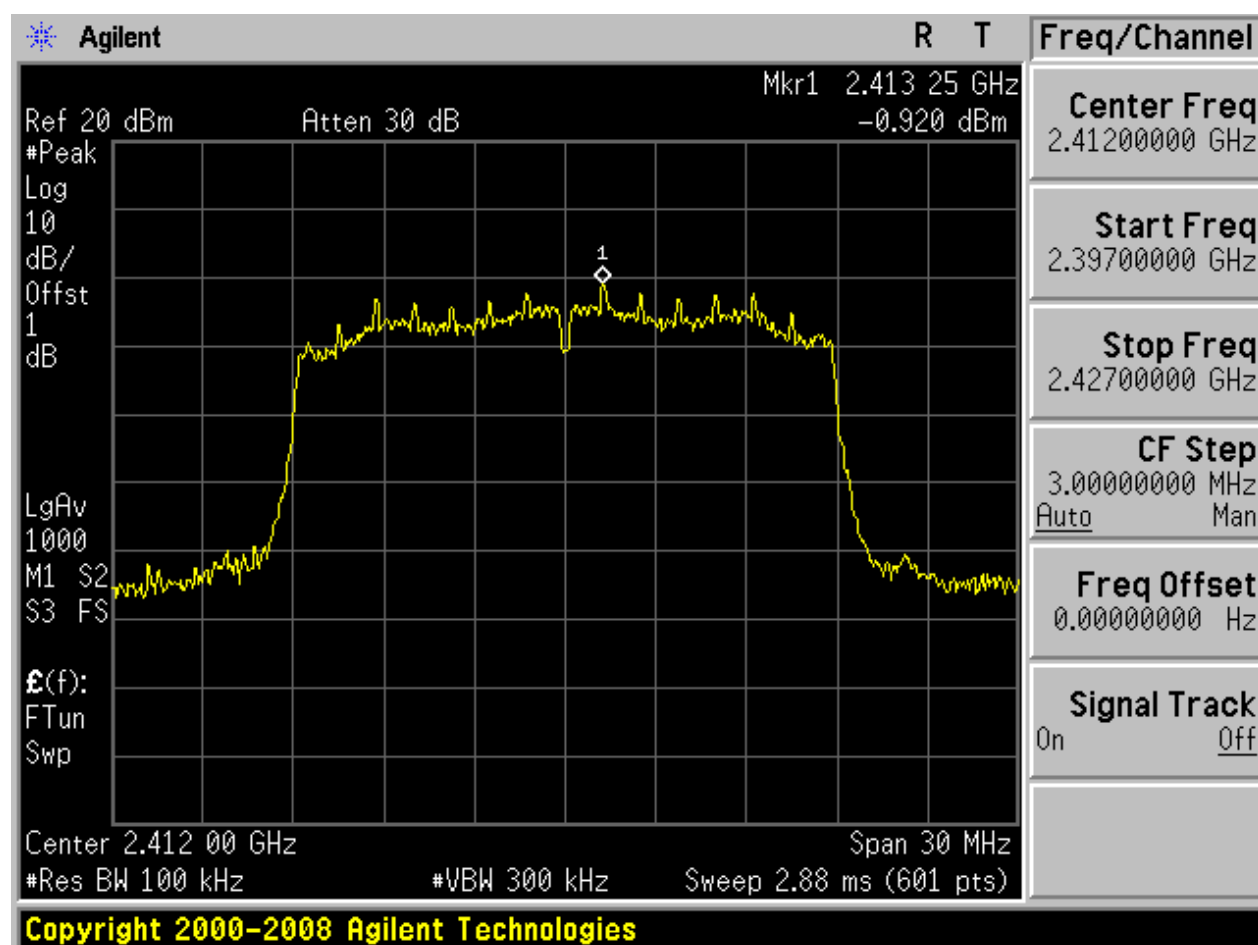






Puw:

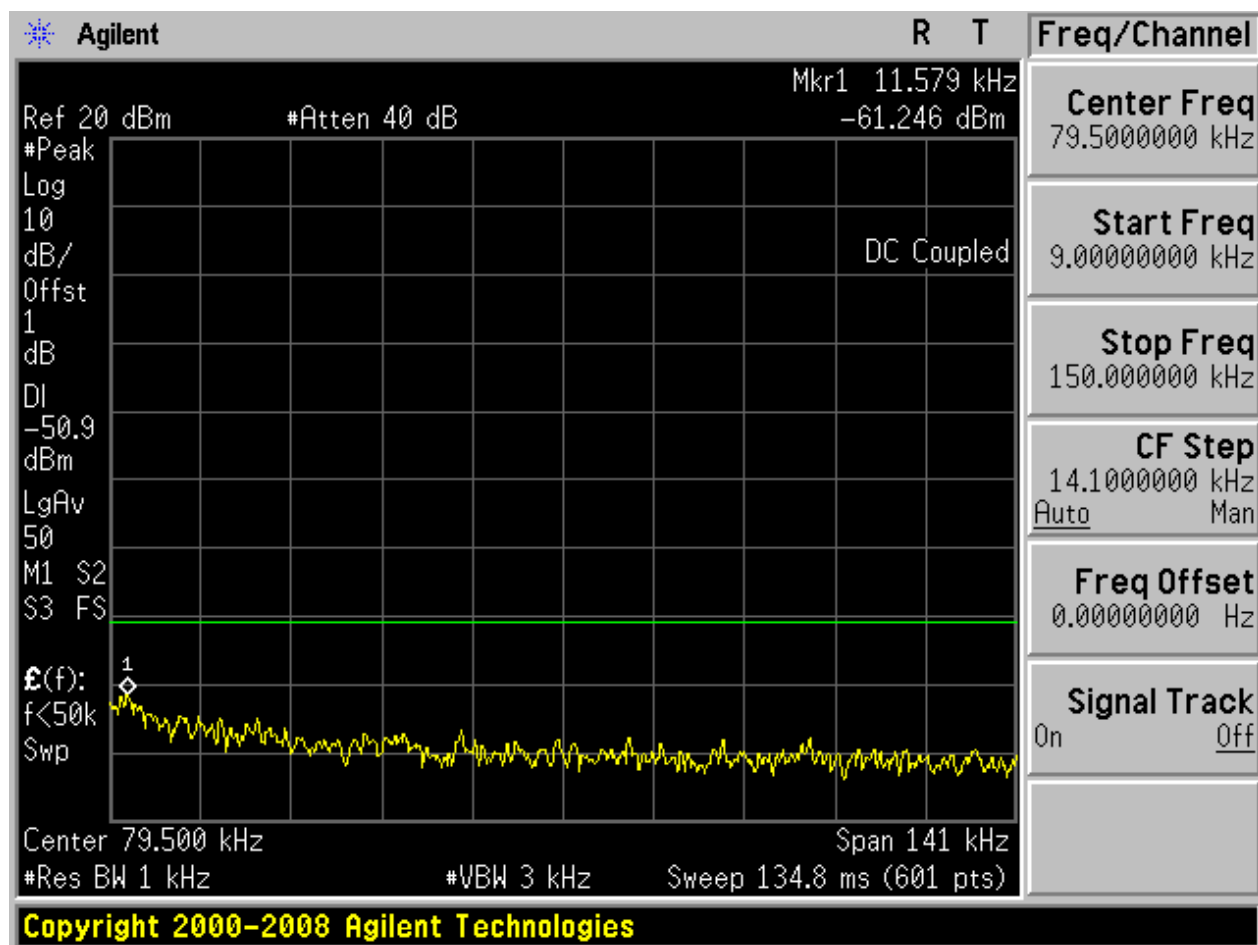


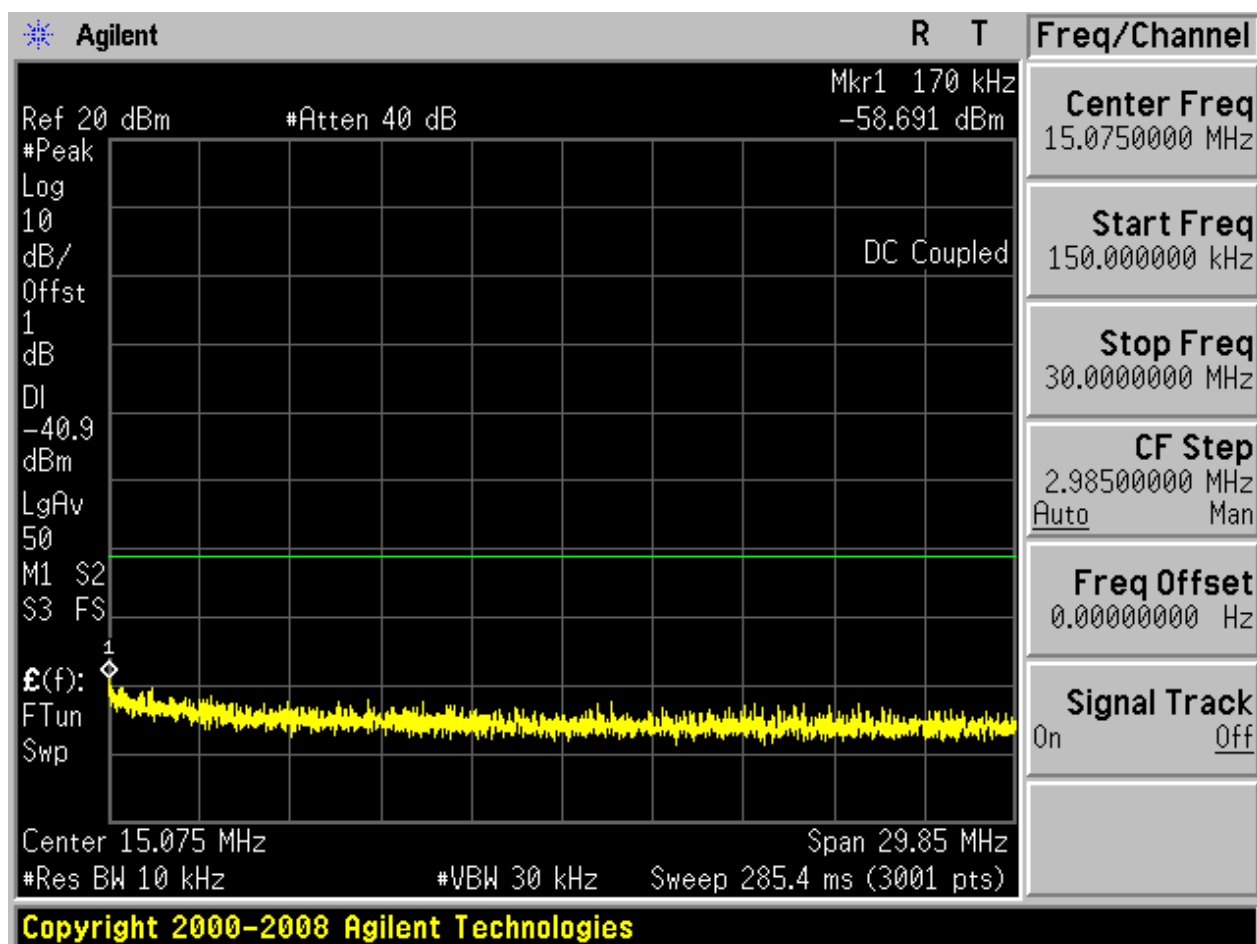

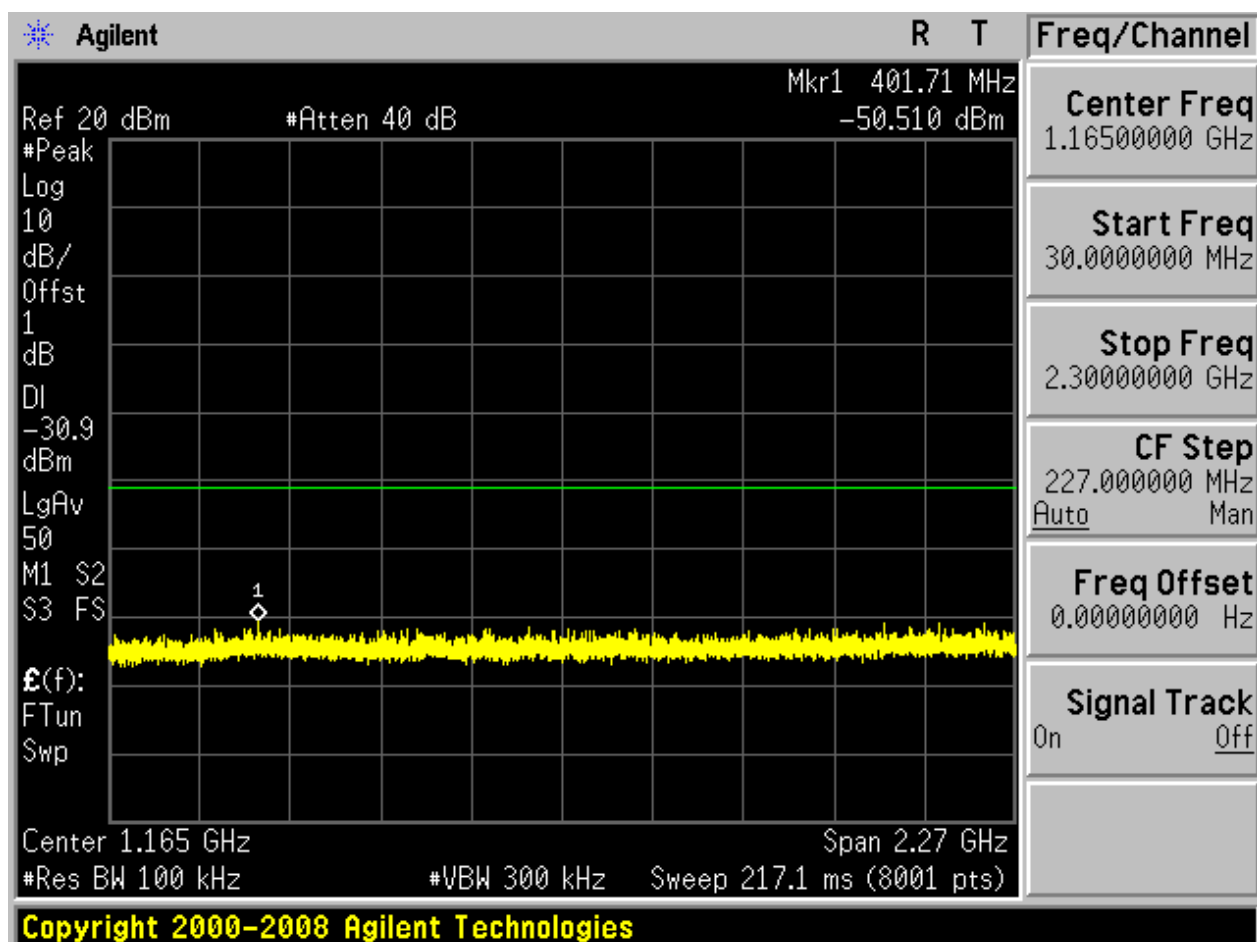

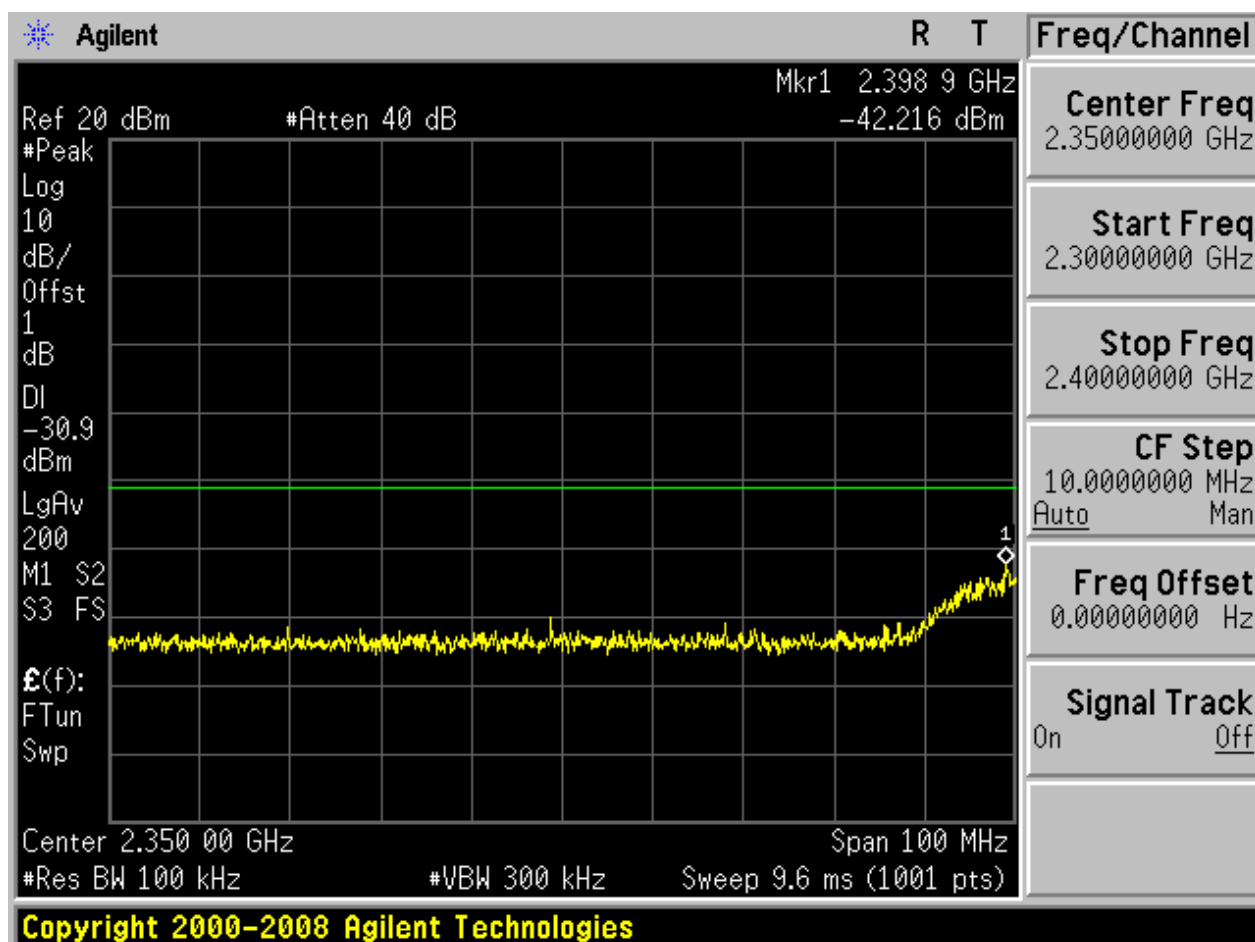


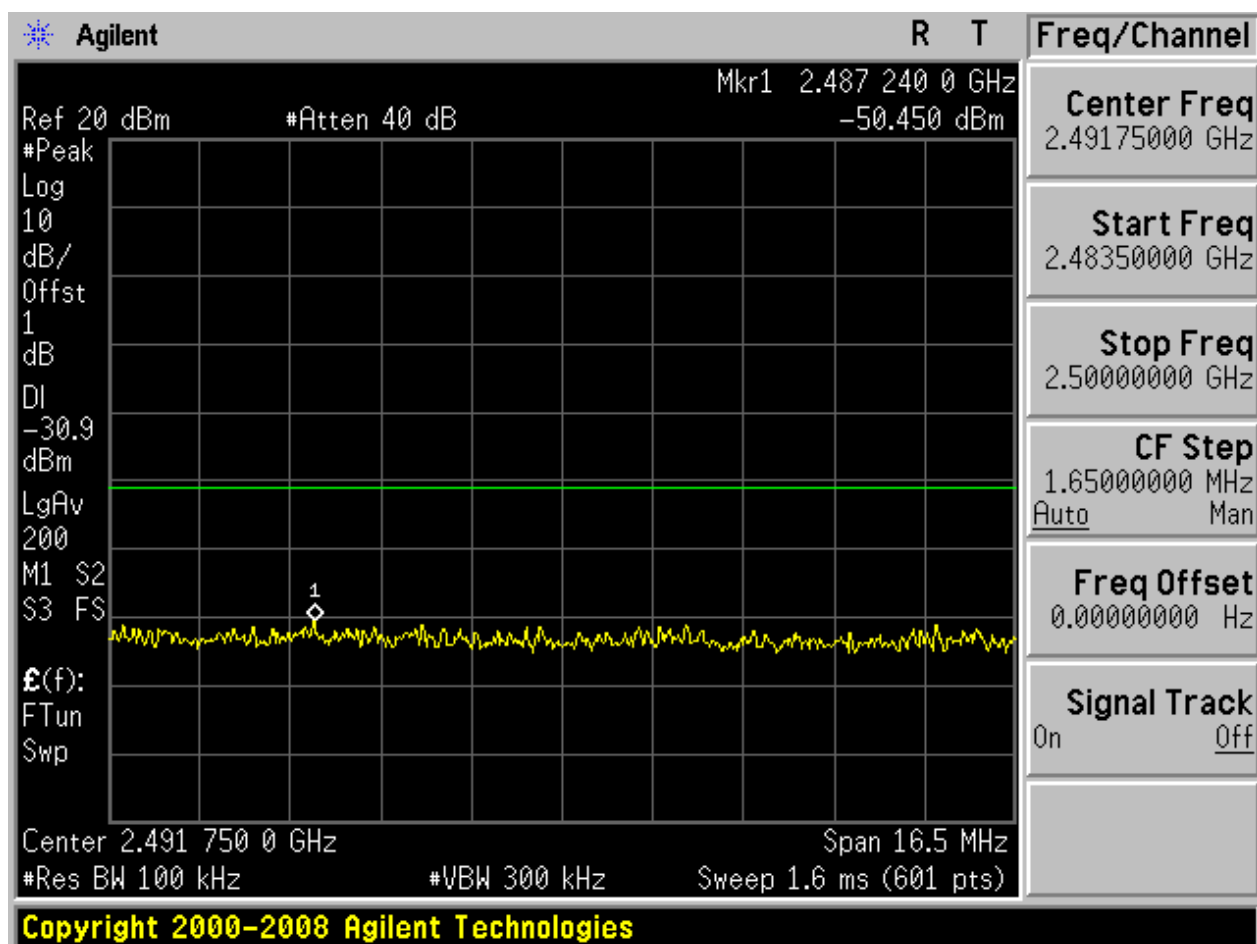

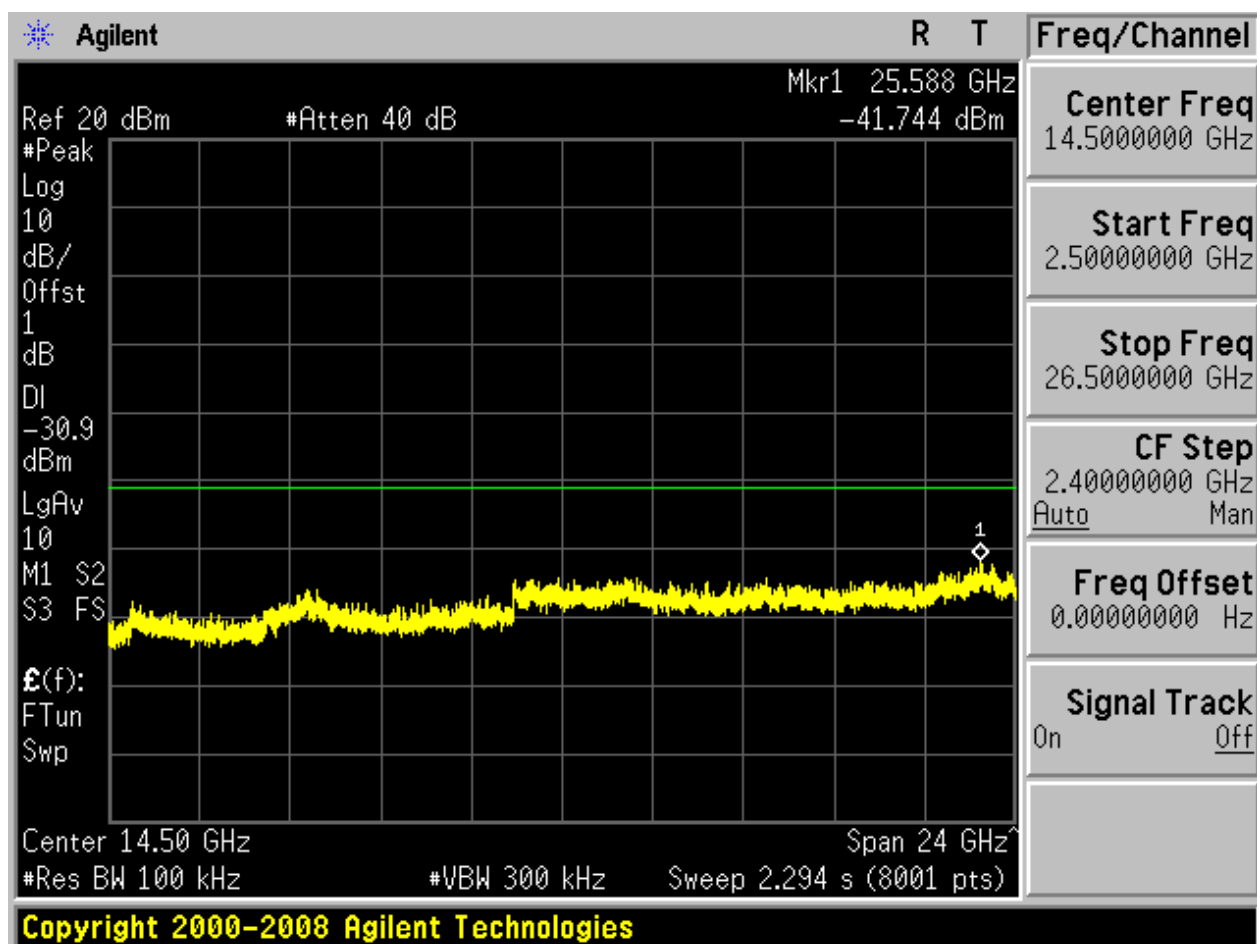


2.14 11N20_L@Ant 2


Pref:

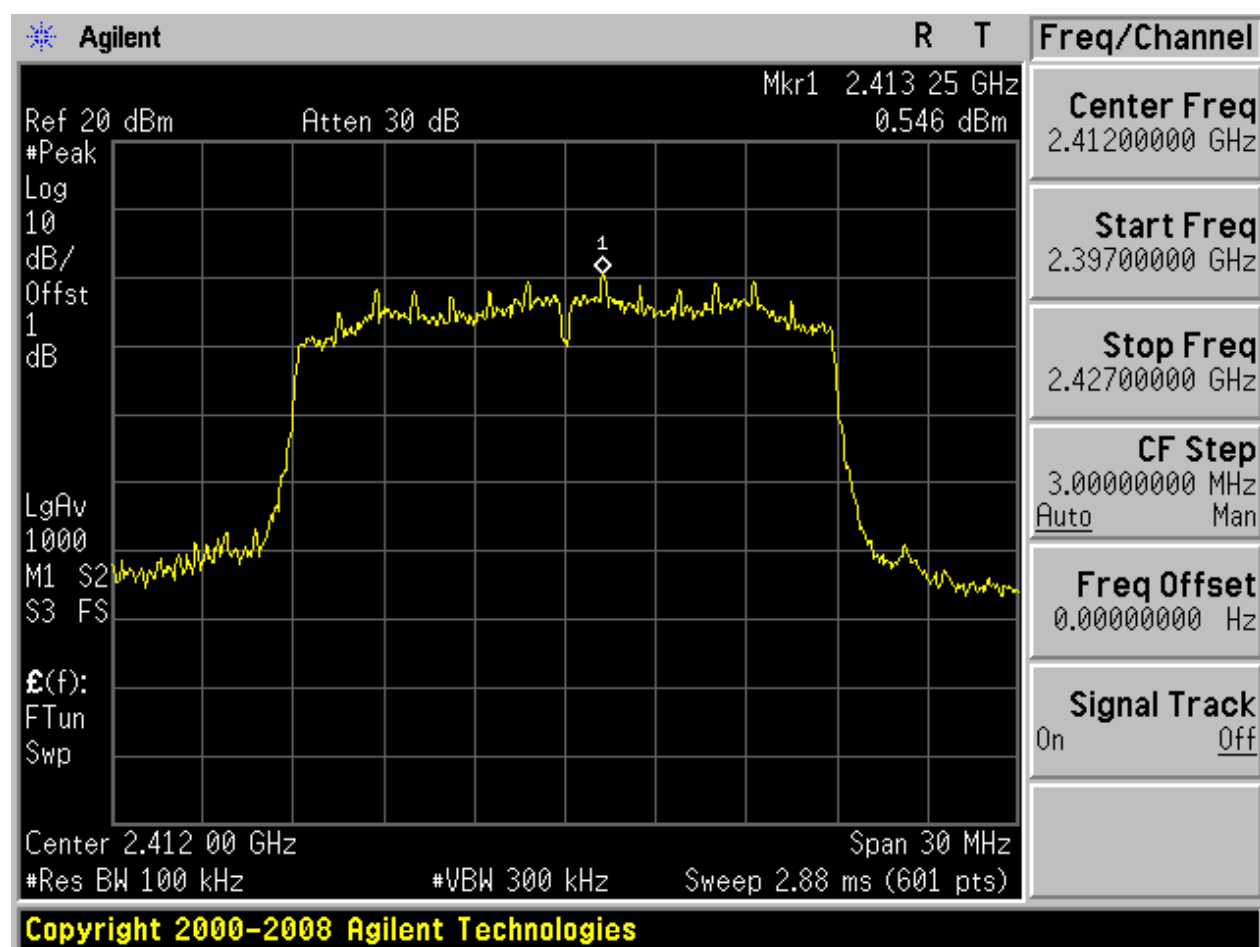






Puw:

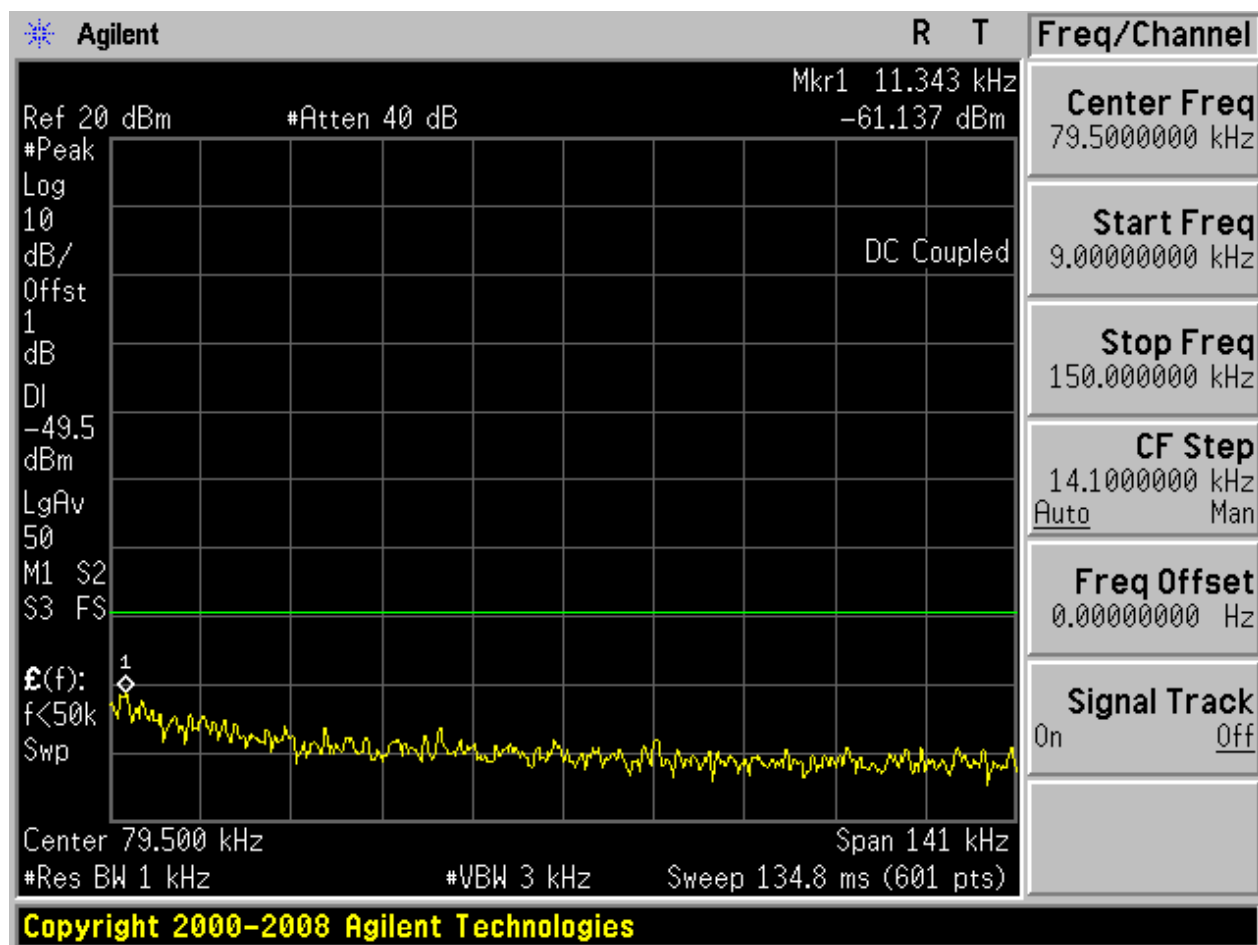


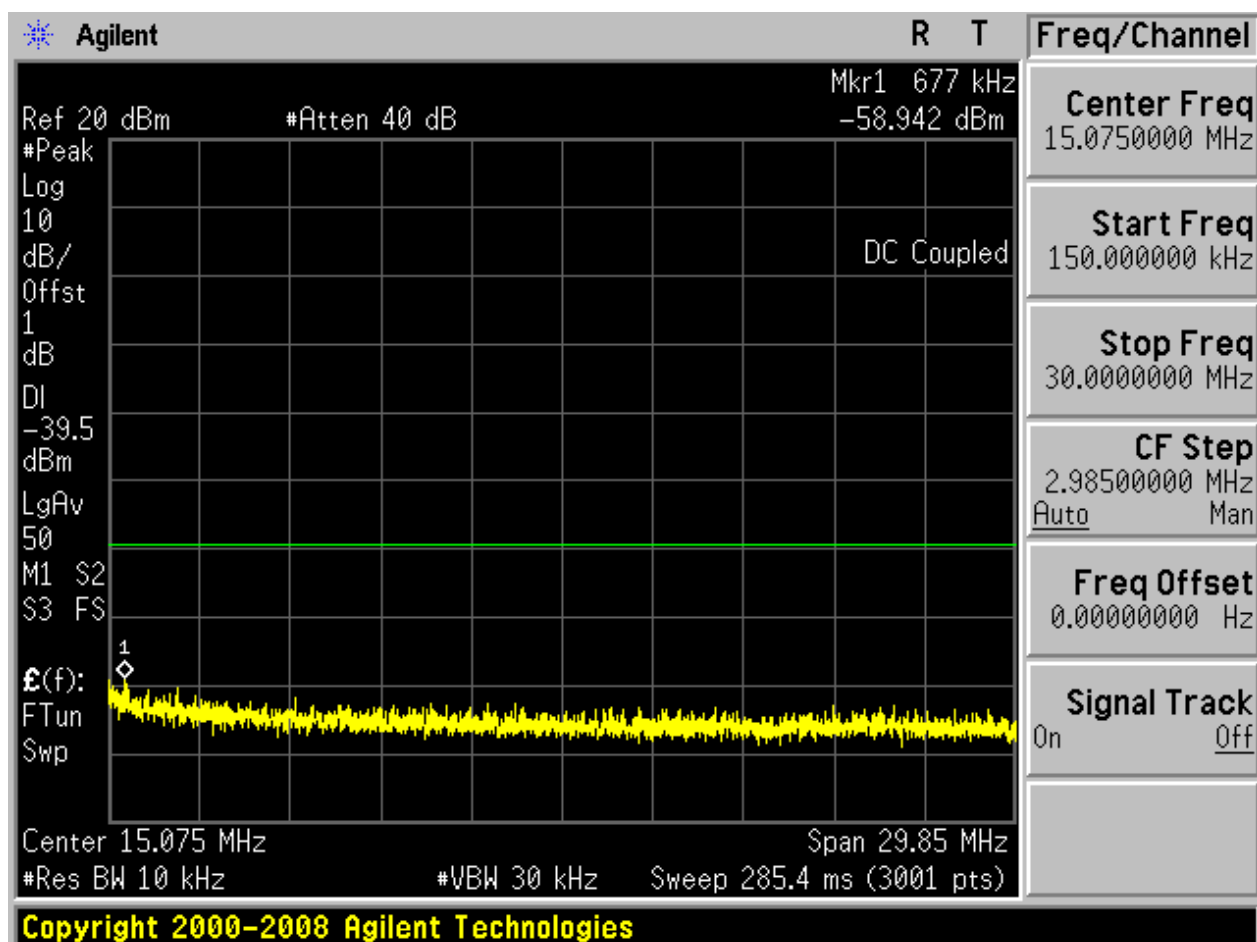

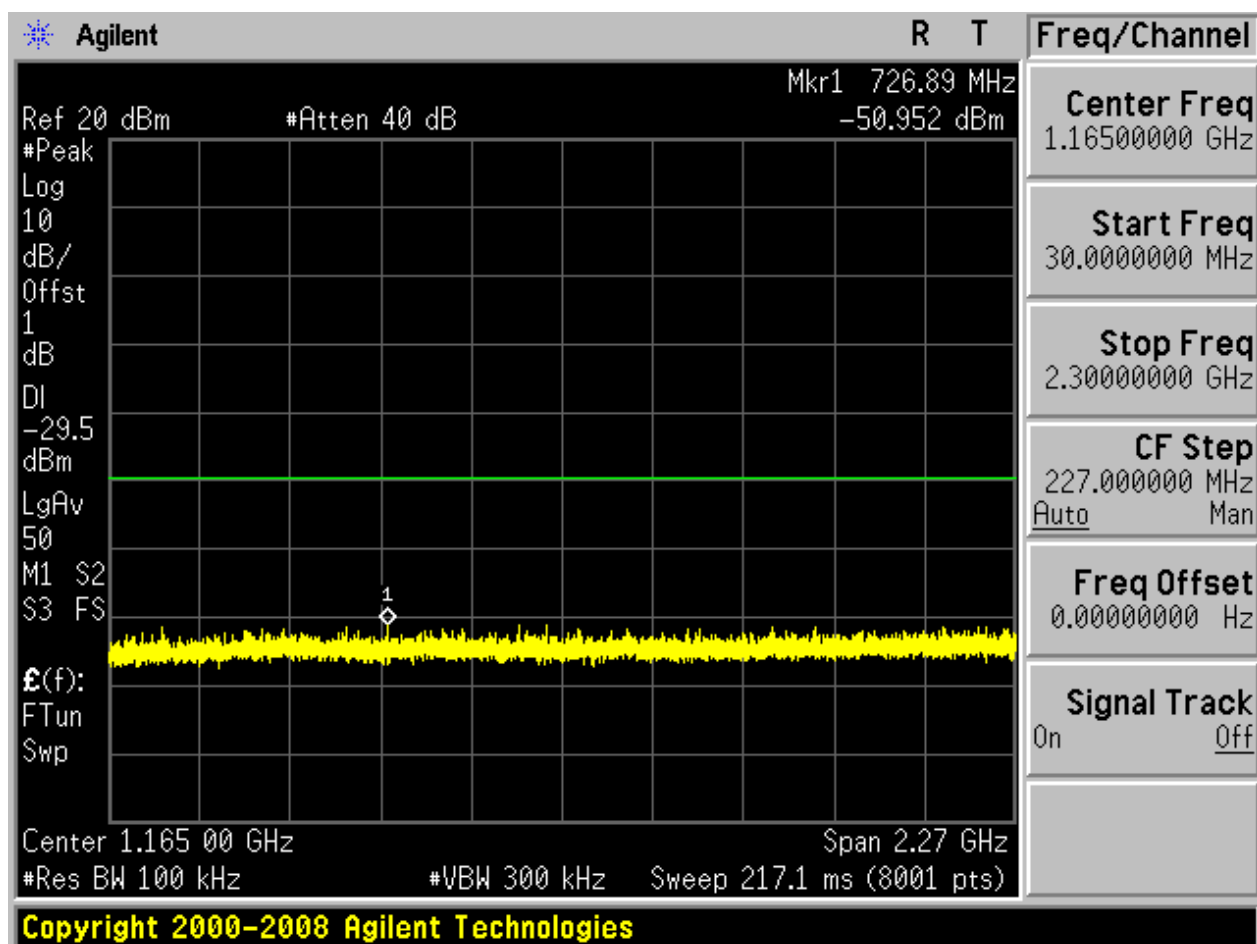

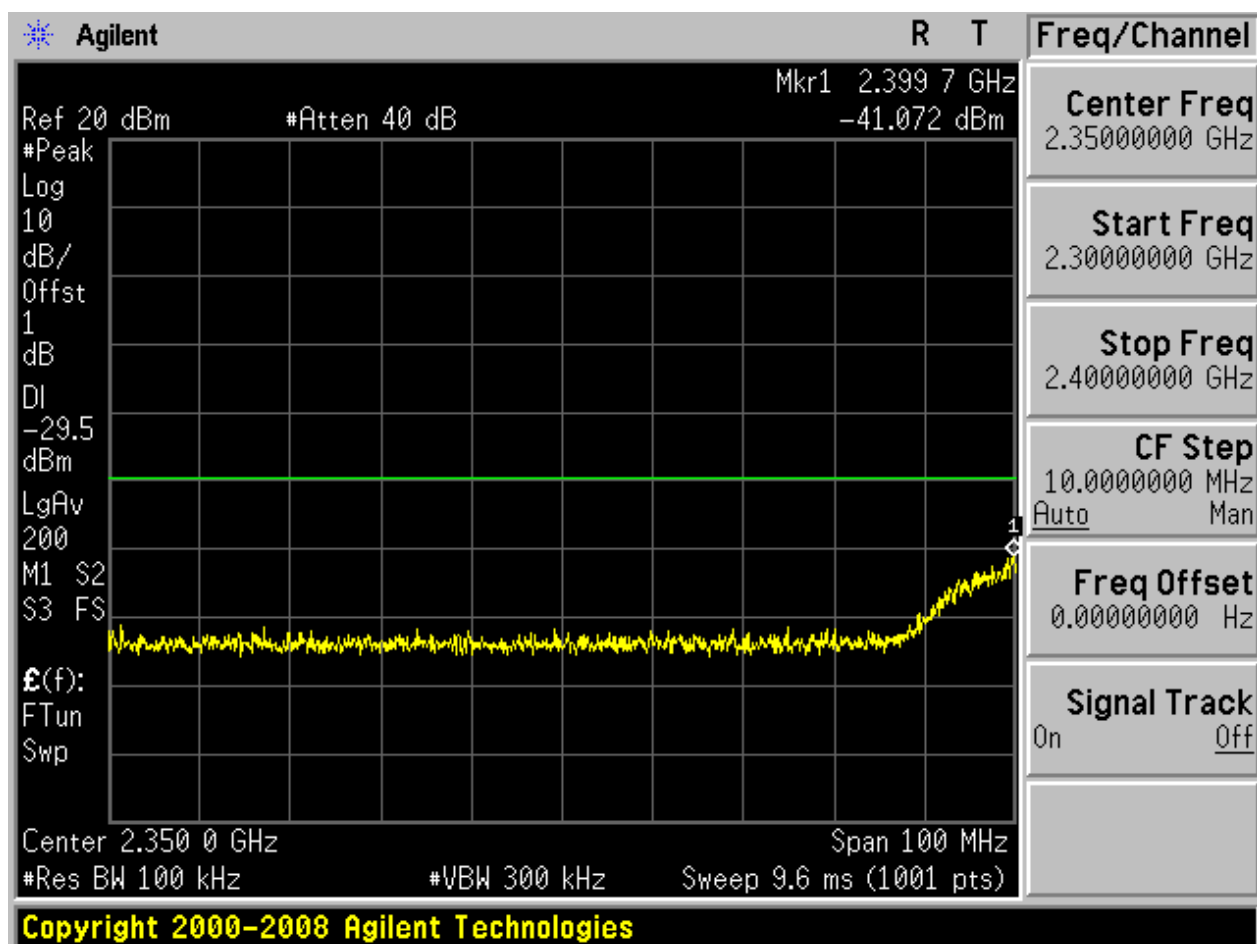


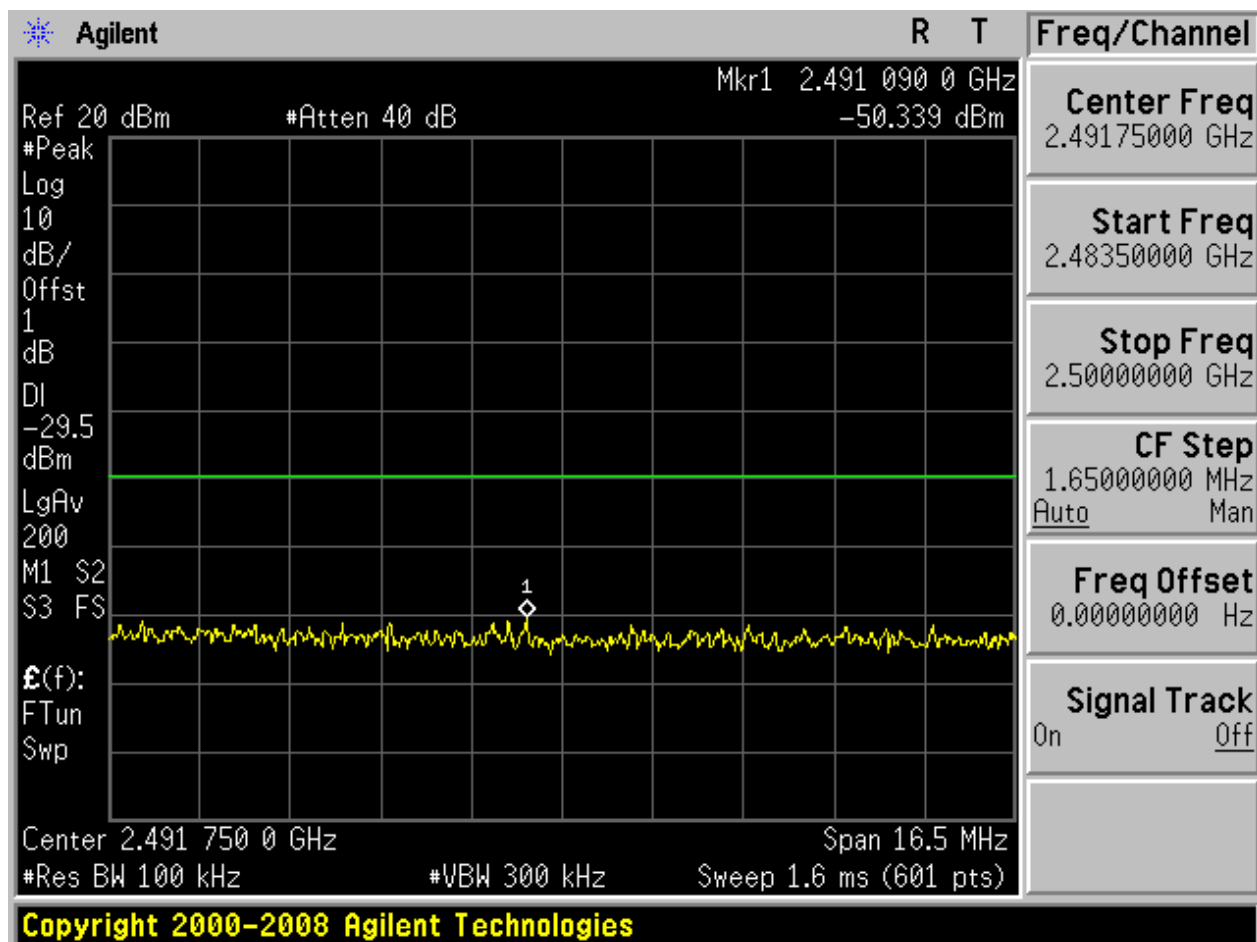

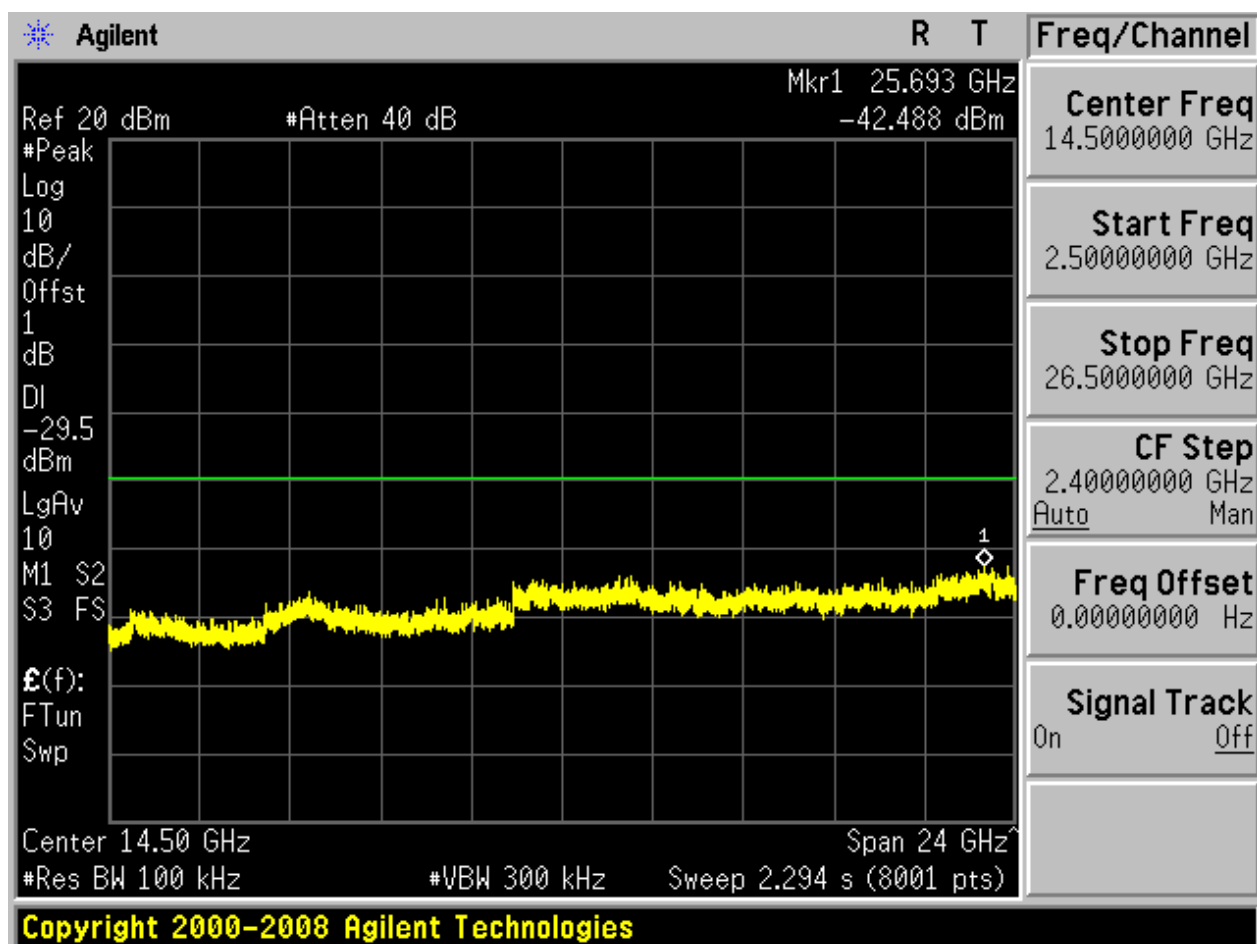


2.15 11N20_M@Ant 1


Pref:

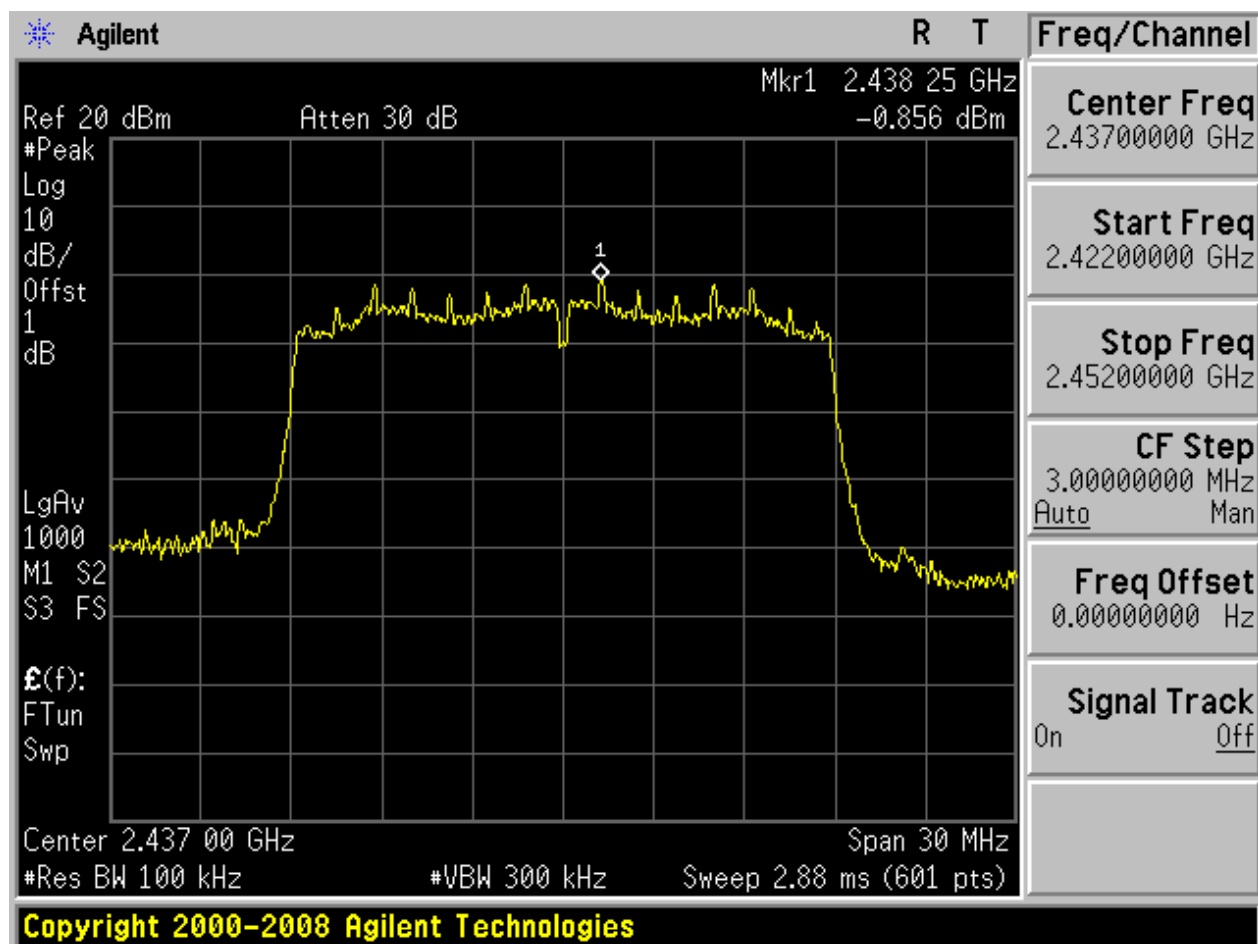






Puw:

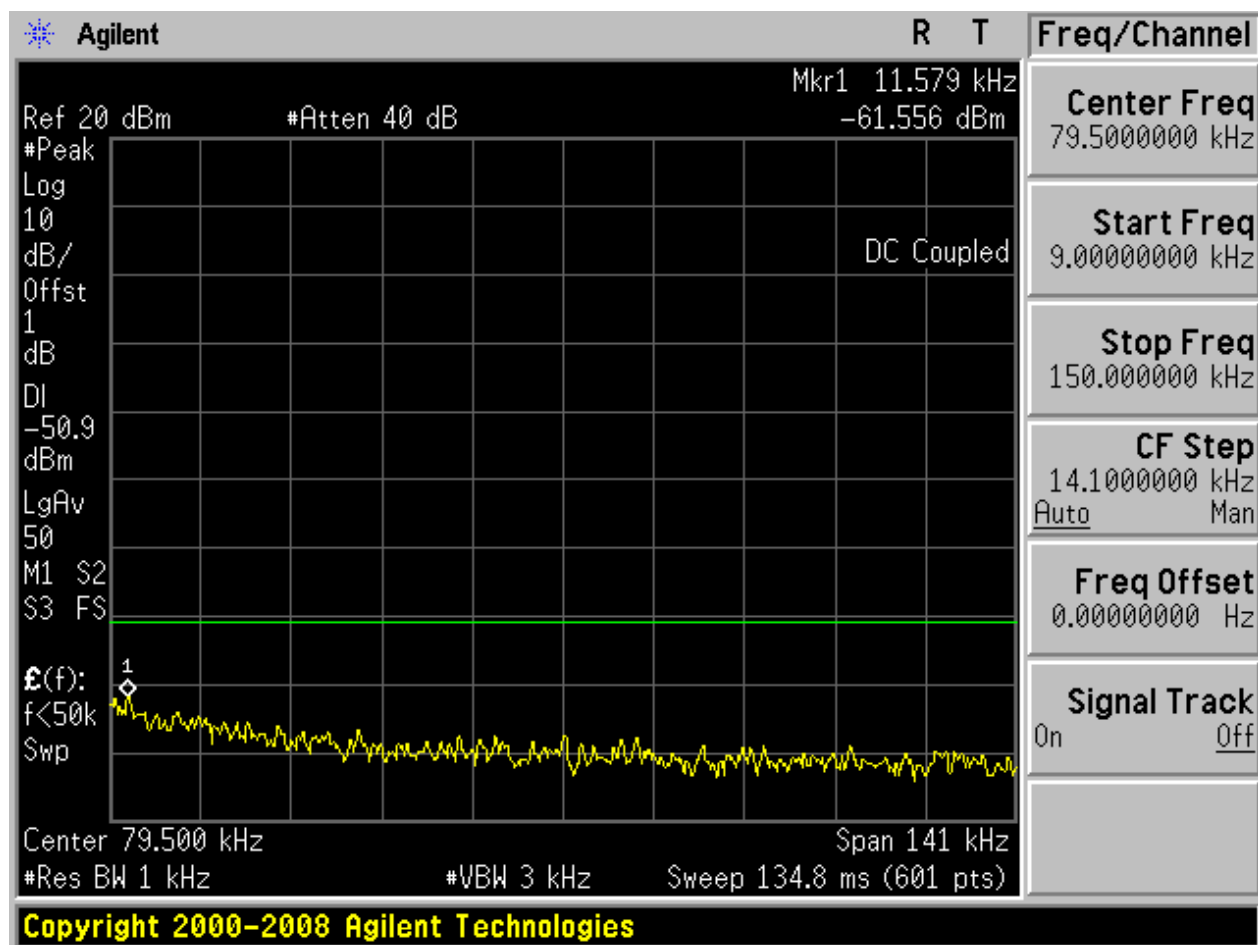


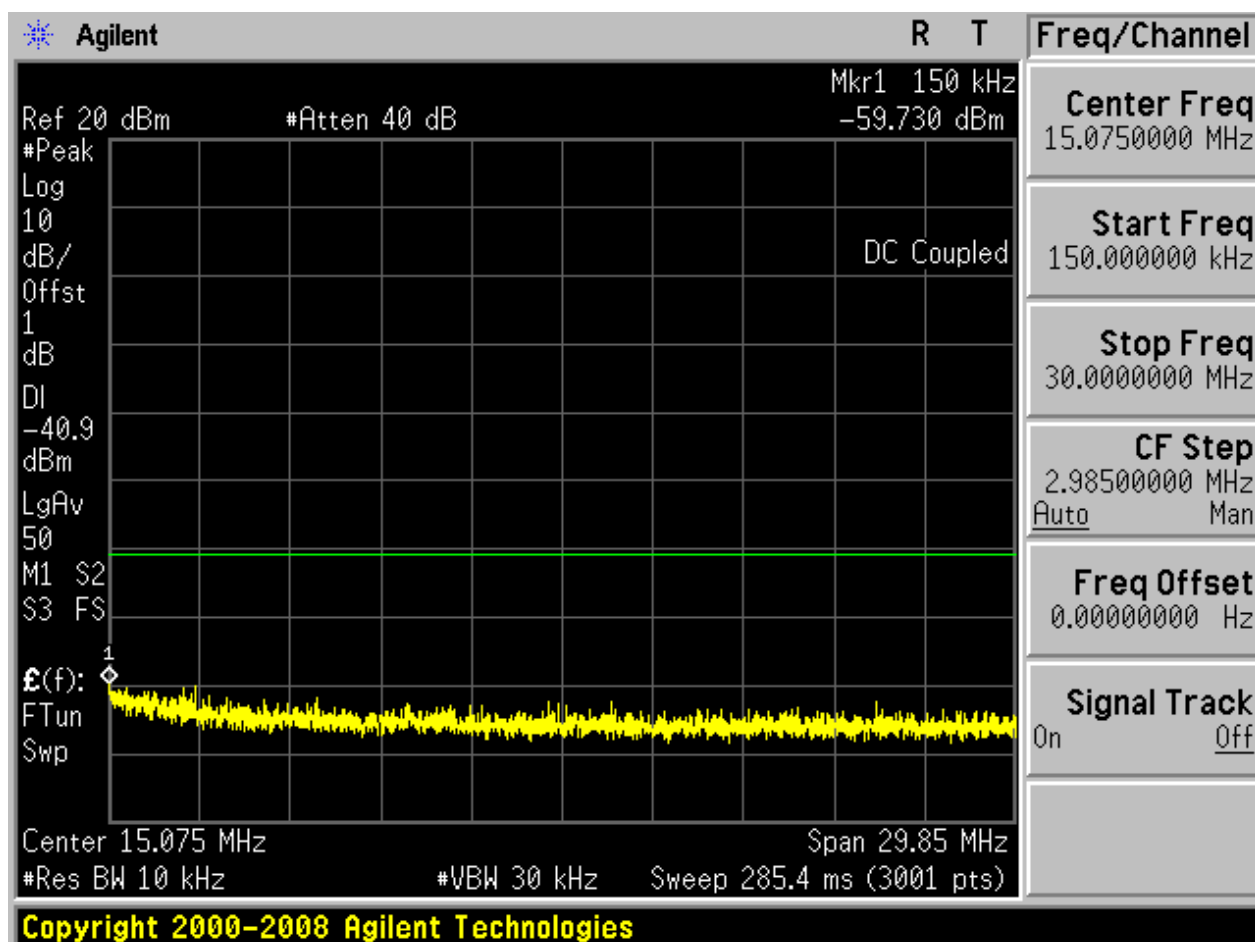

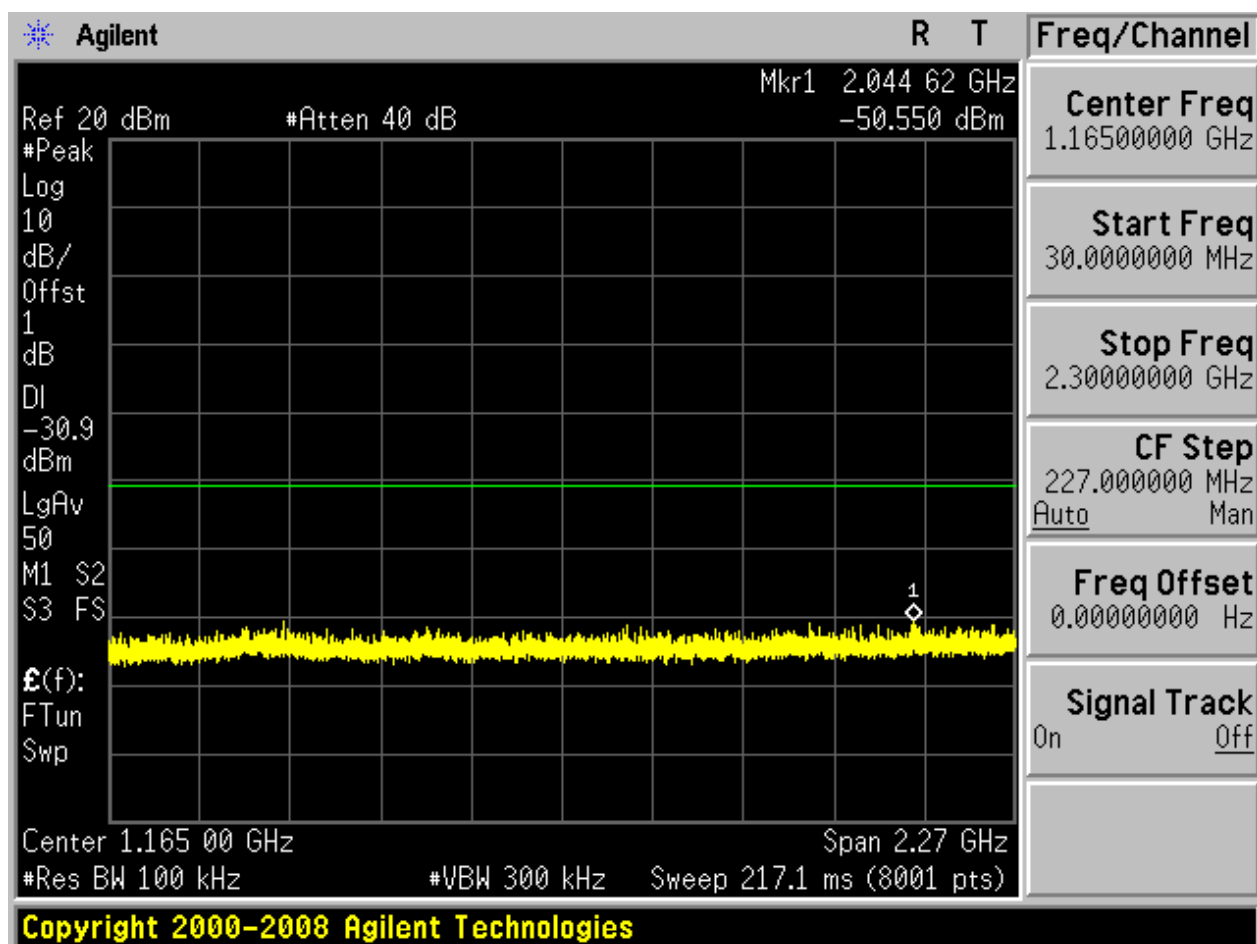

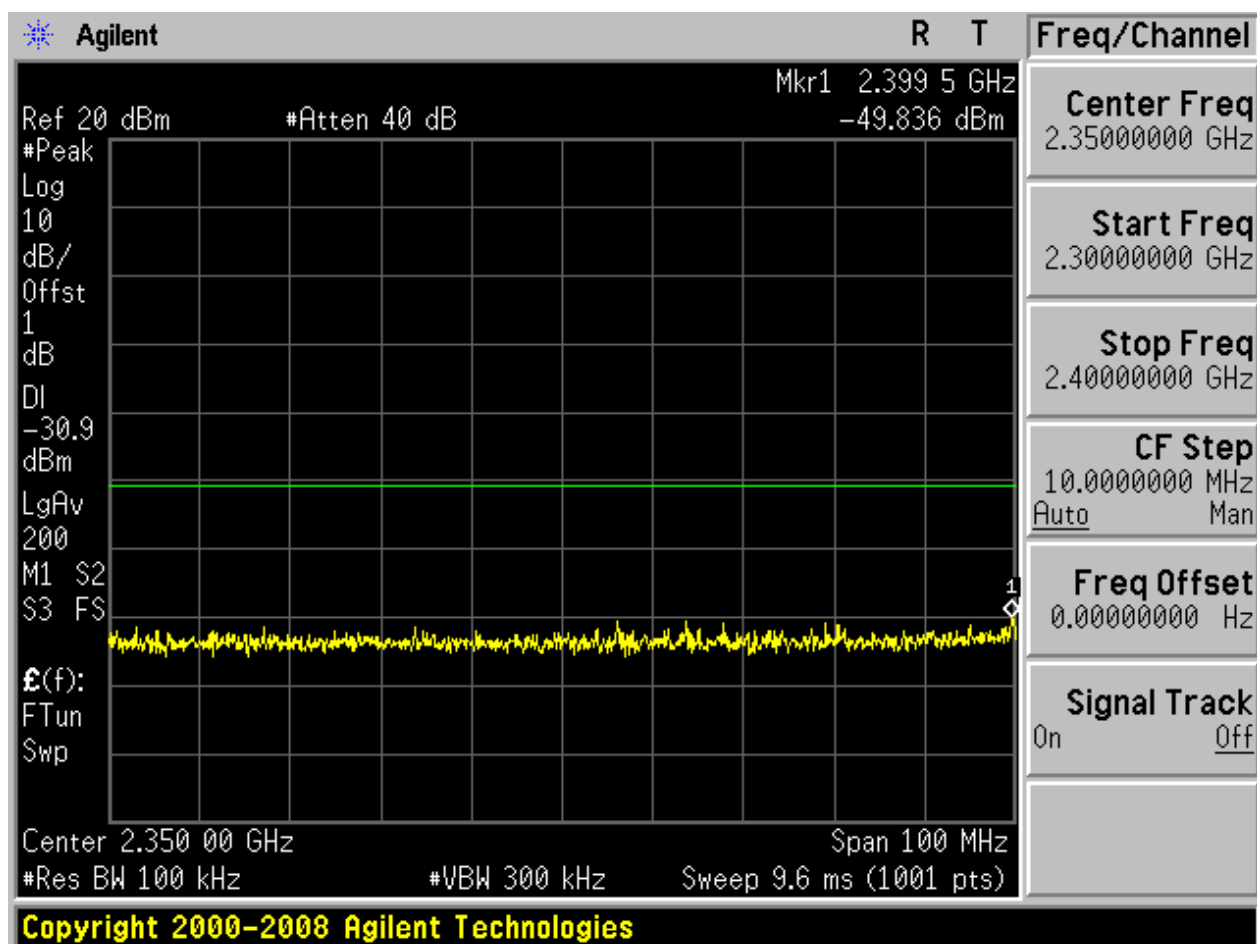


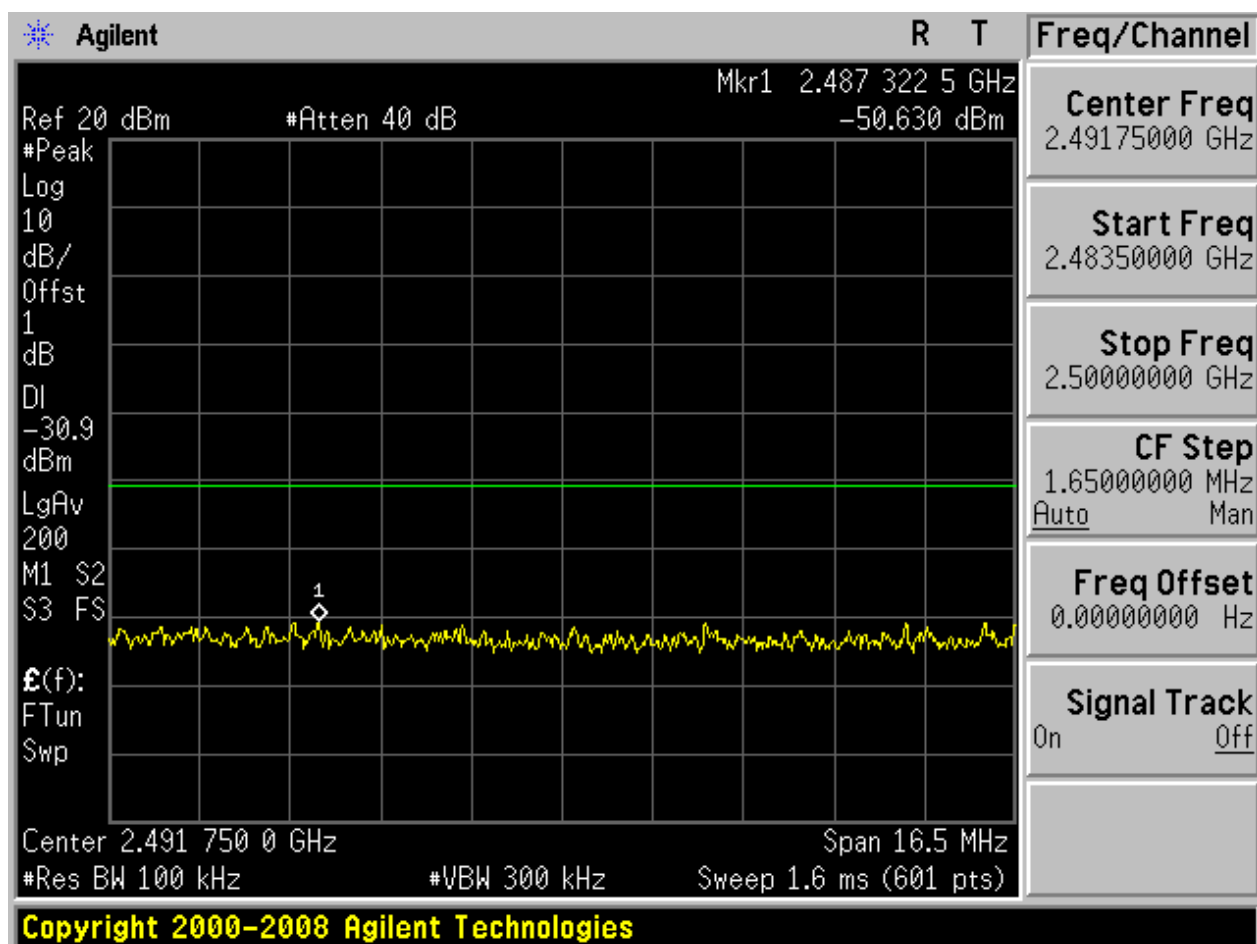

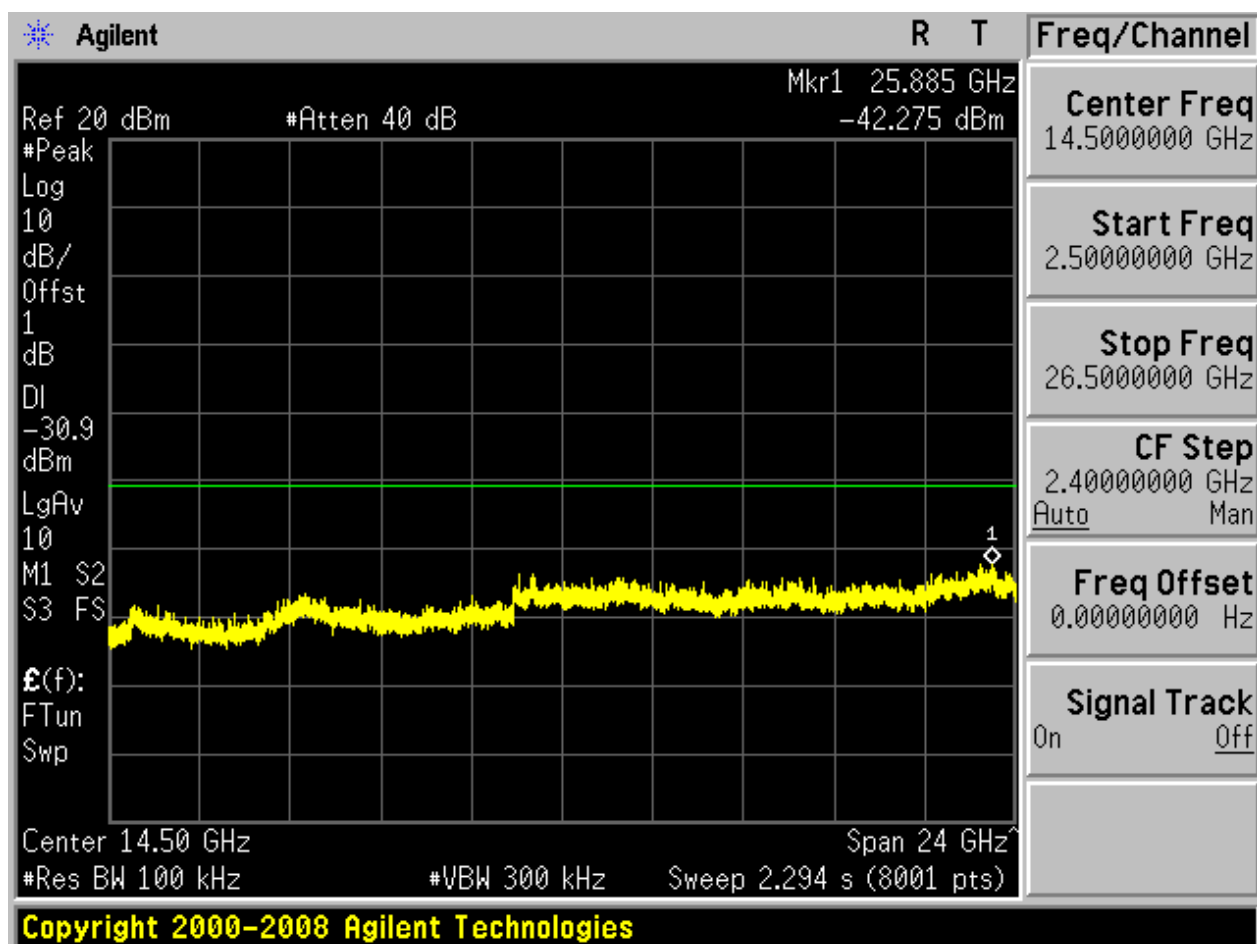


2.16 11N20_M@Ant 2


Pref:

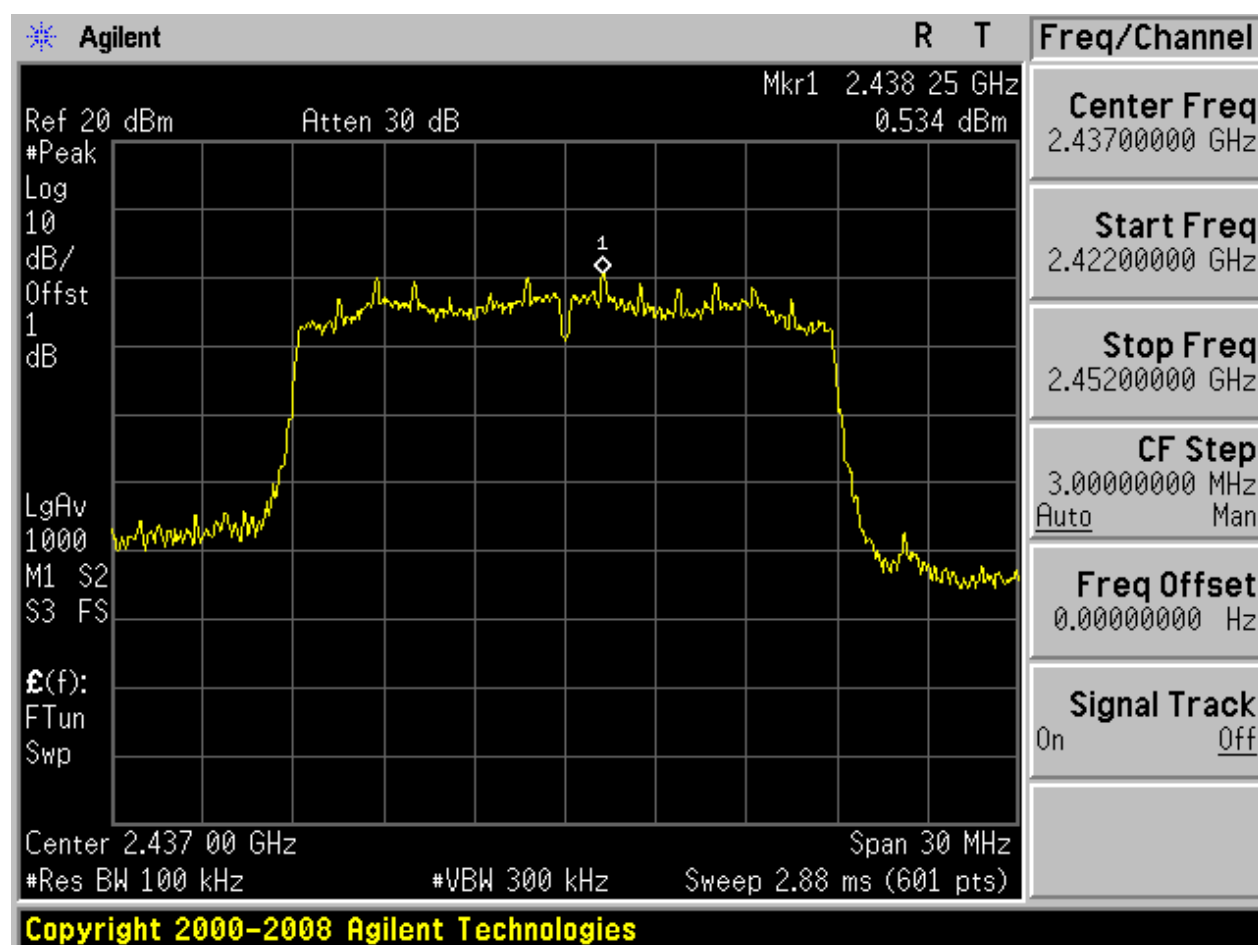






Puw:

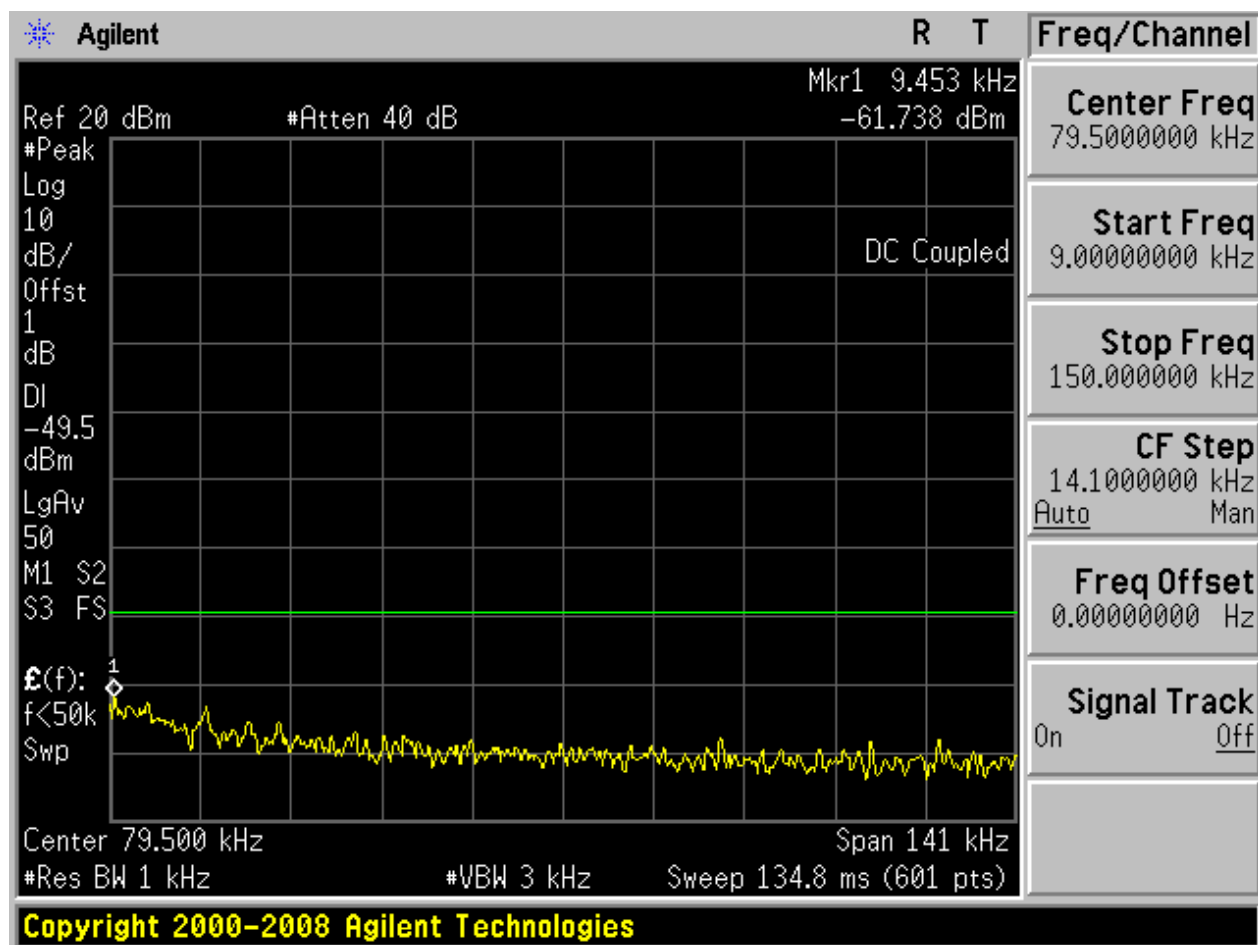


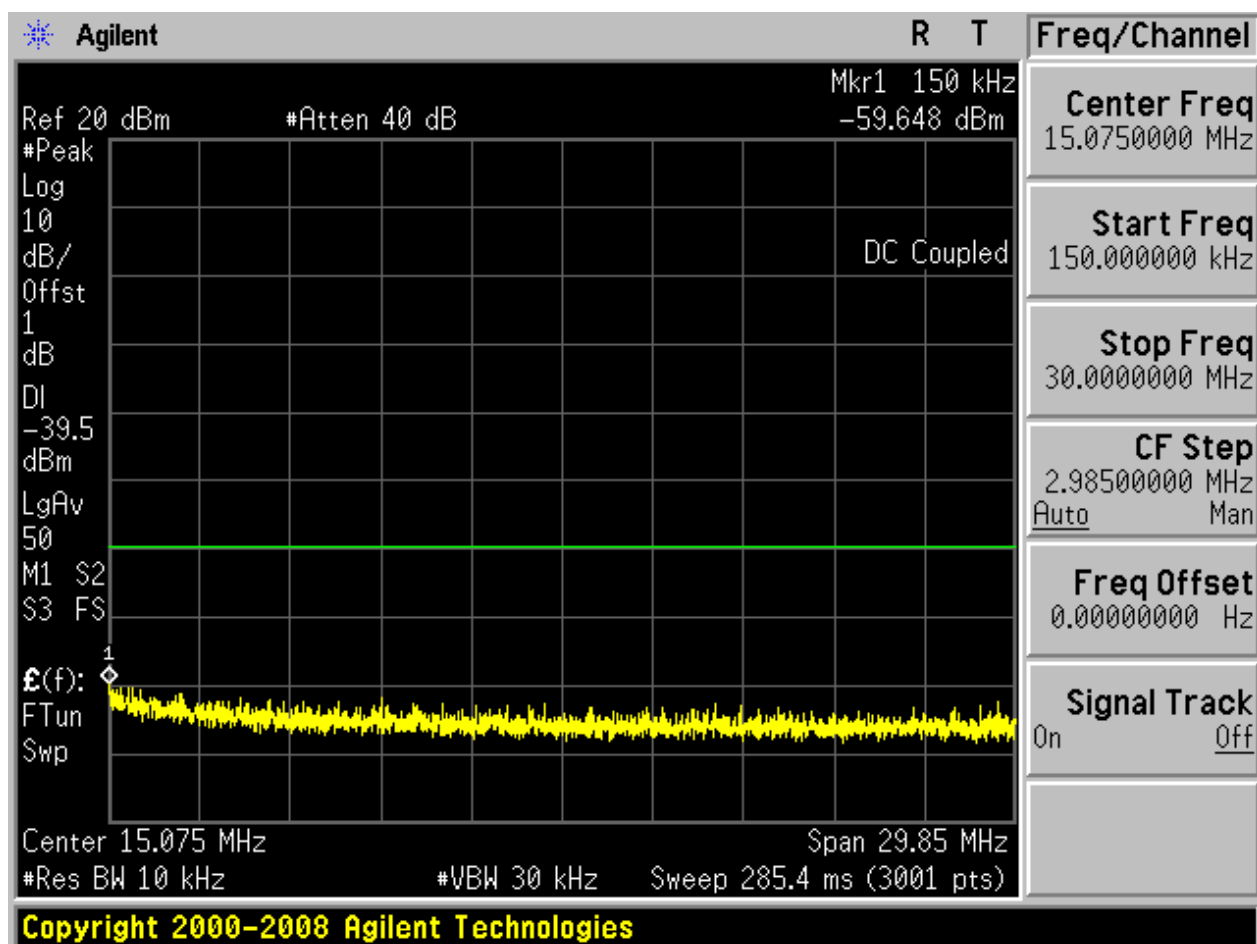

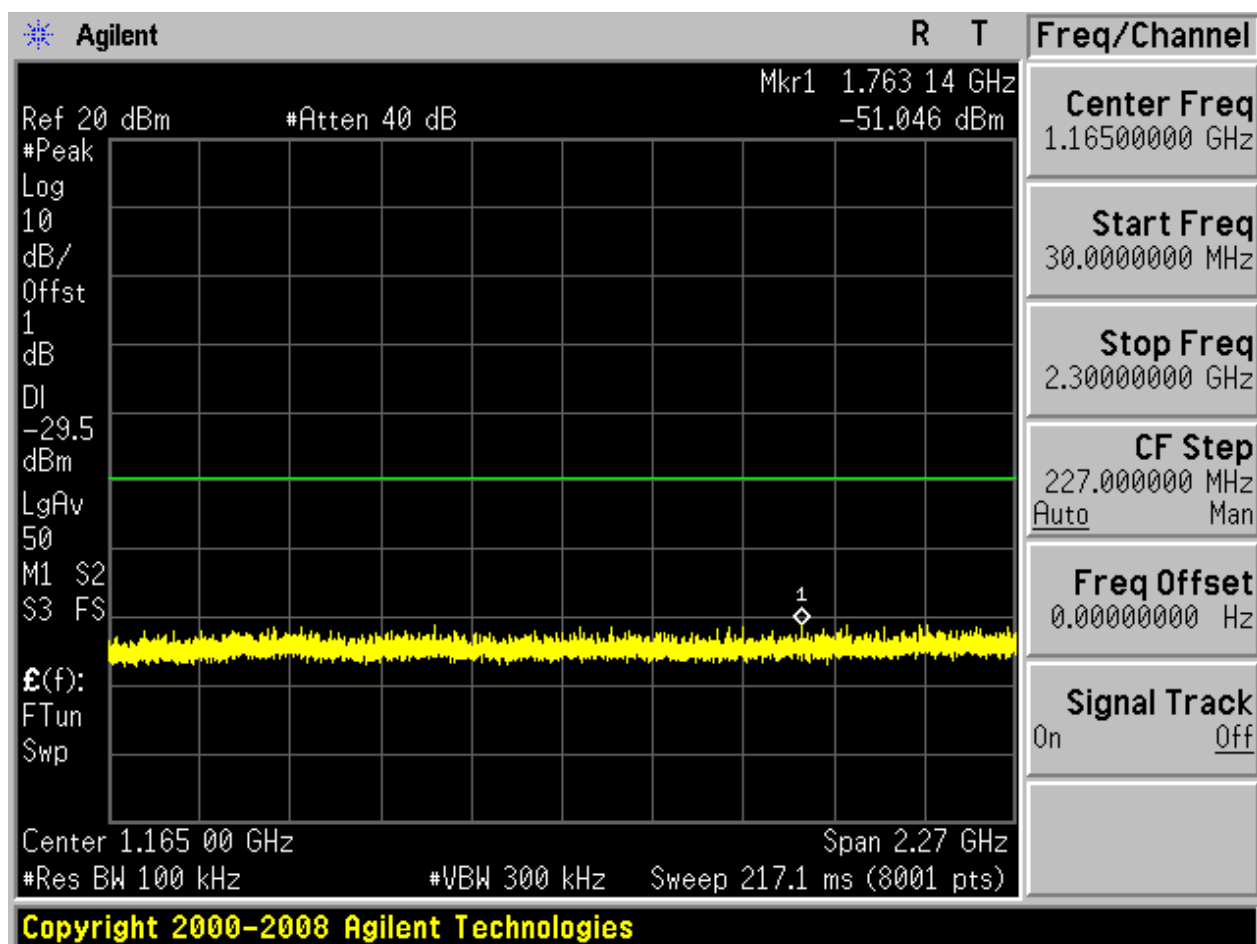

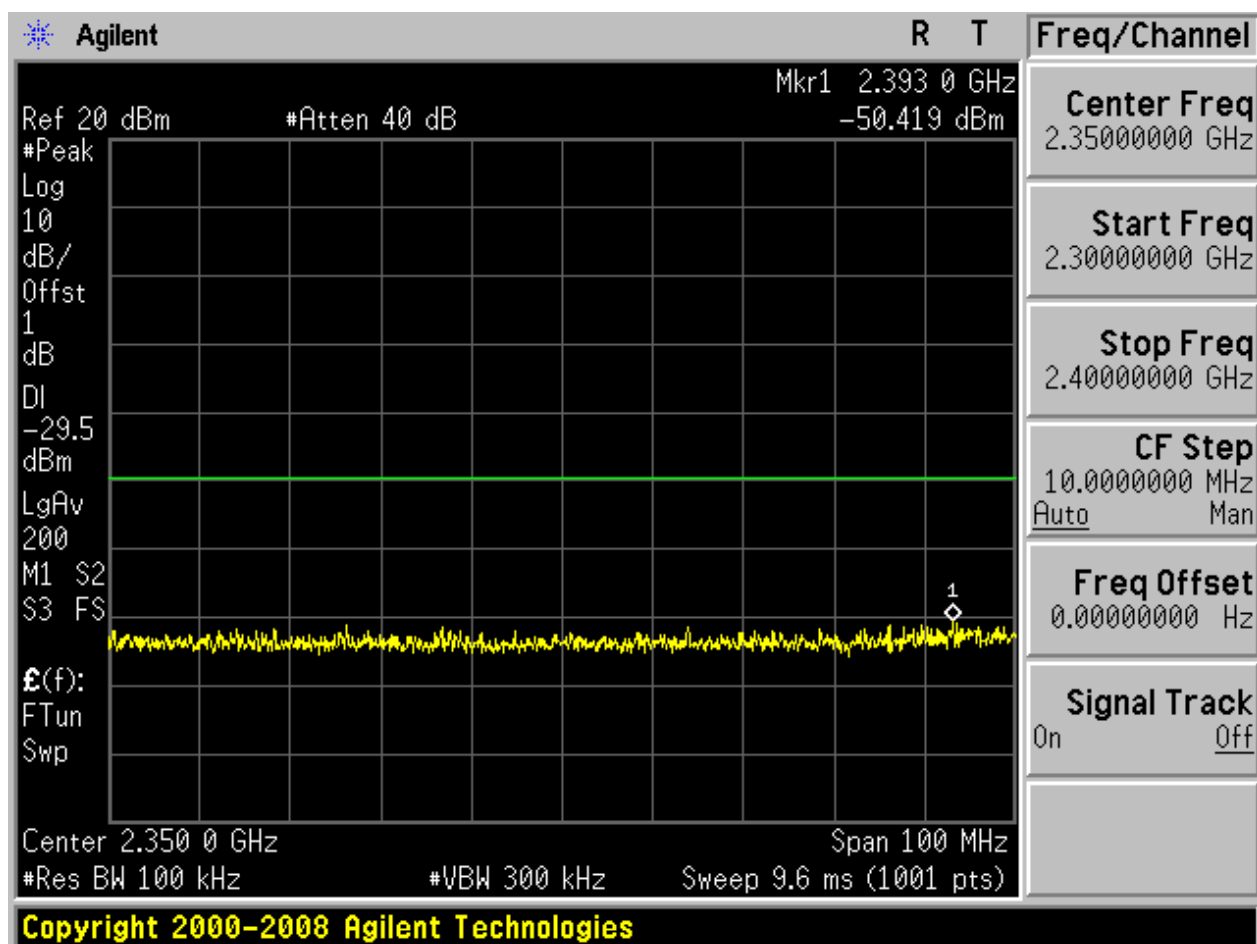


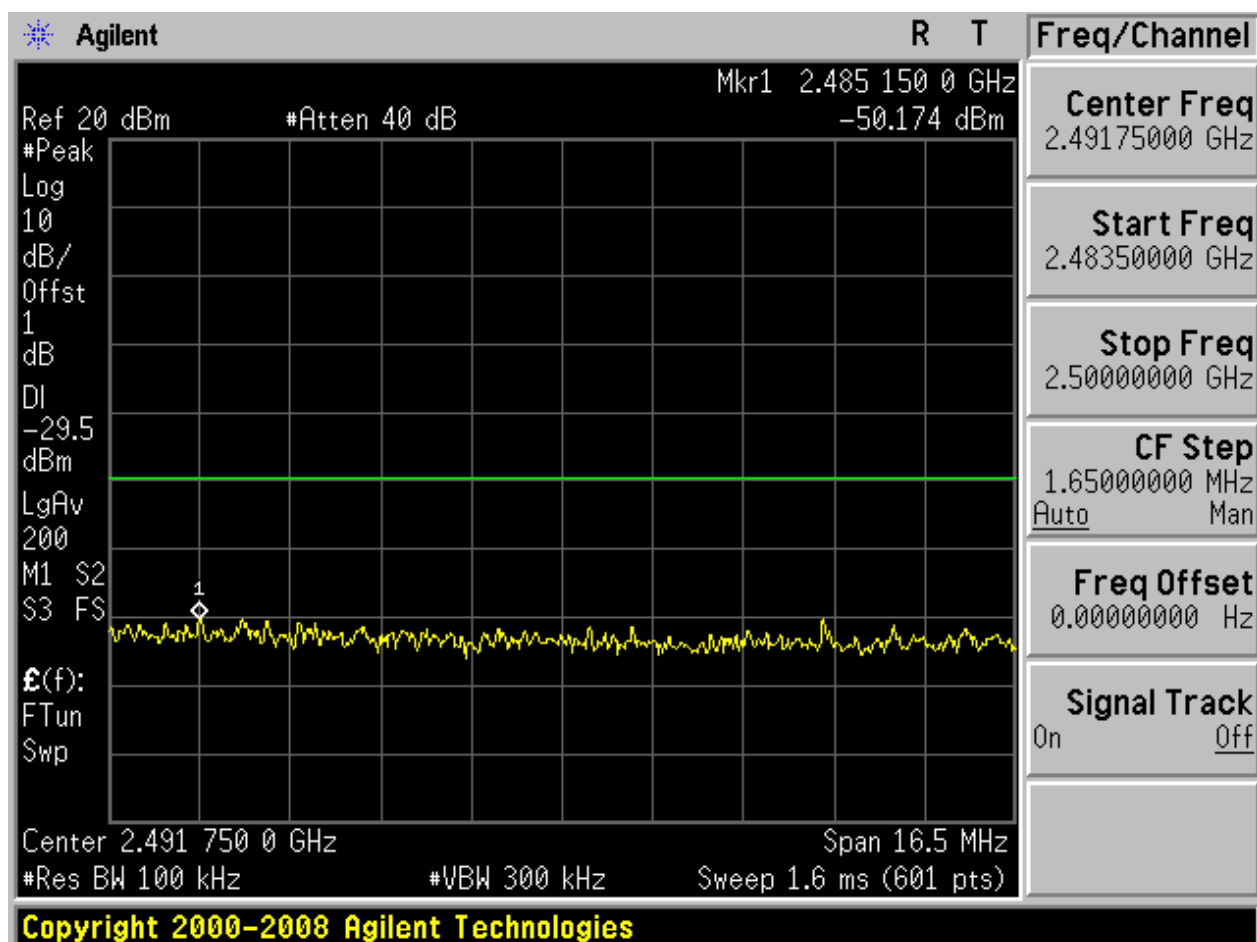

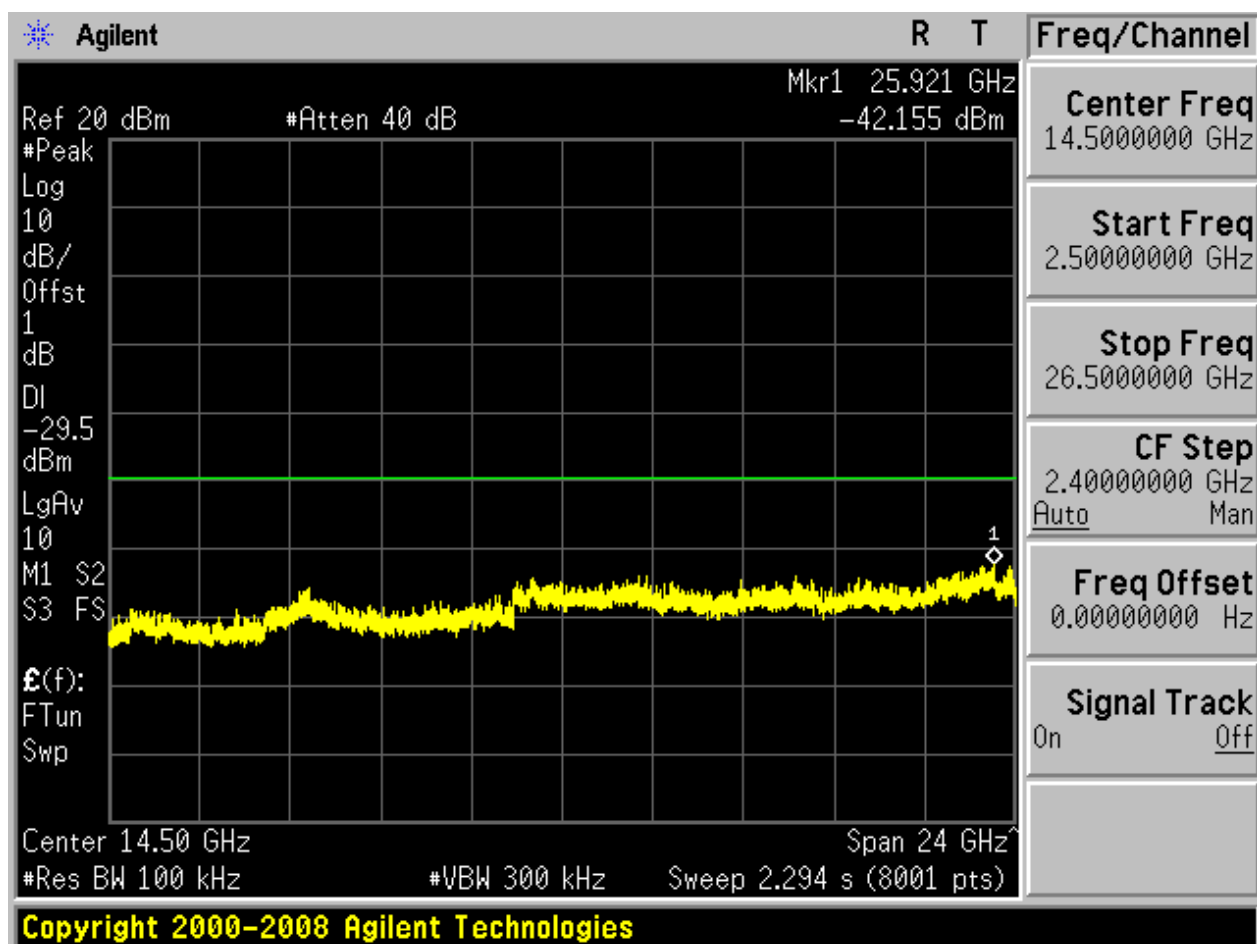


2.17 11N20_H@Ant 1


Pref:

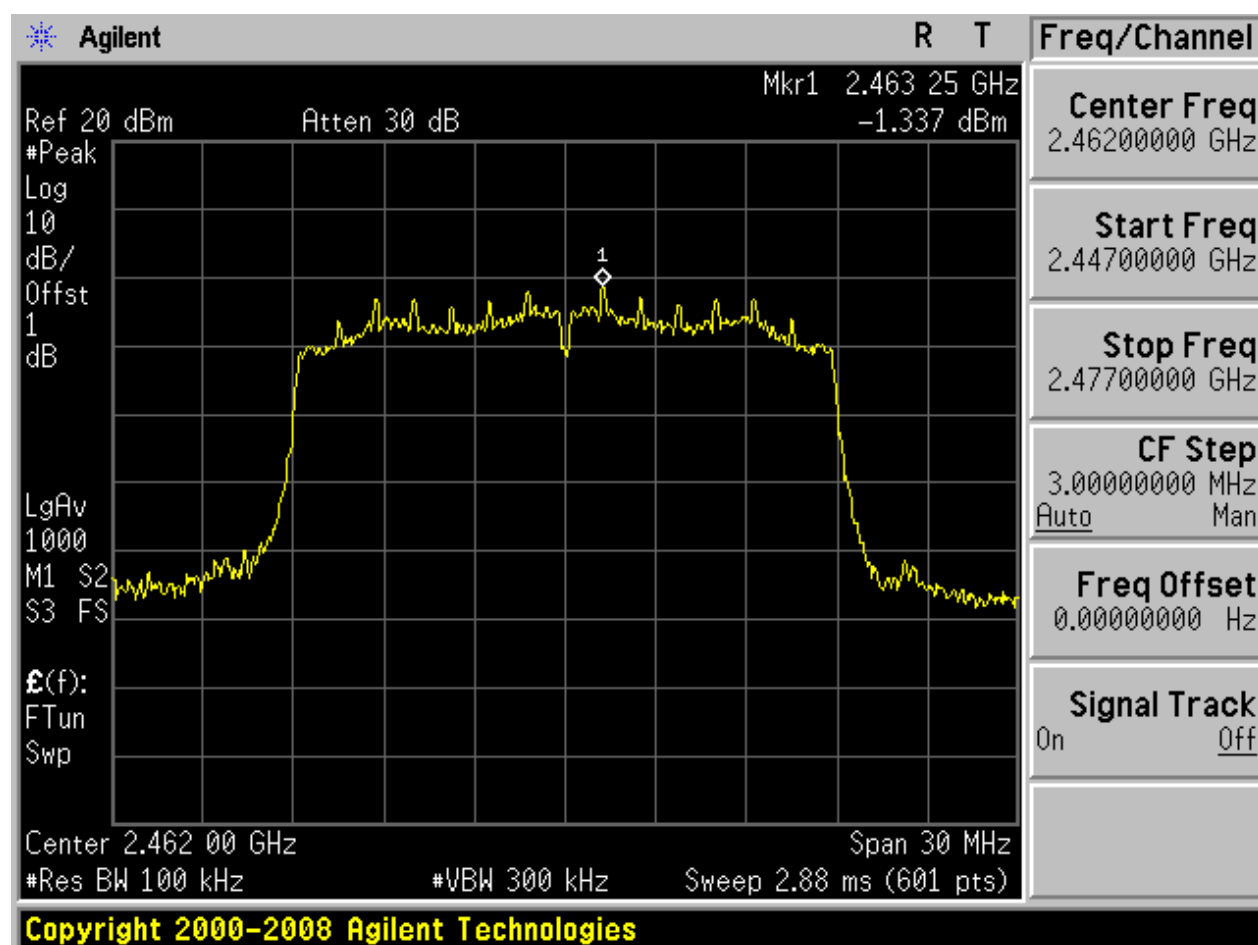






Puw:

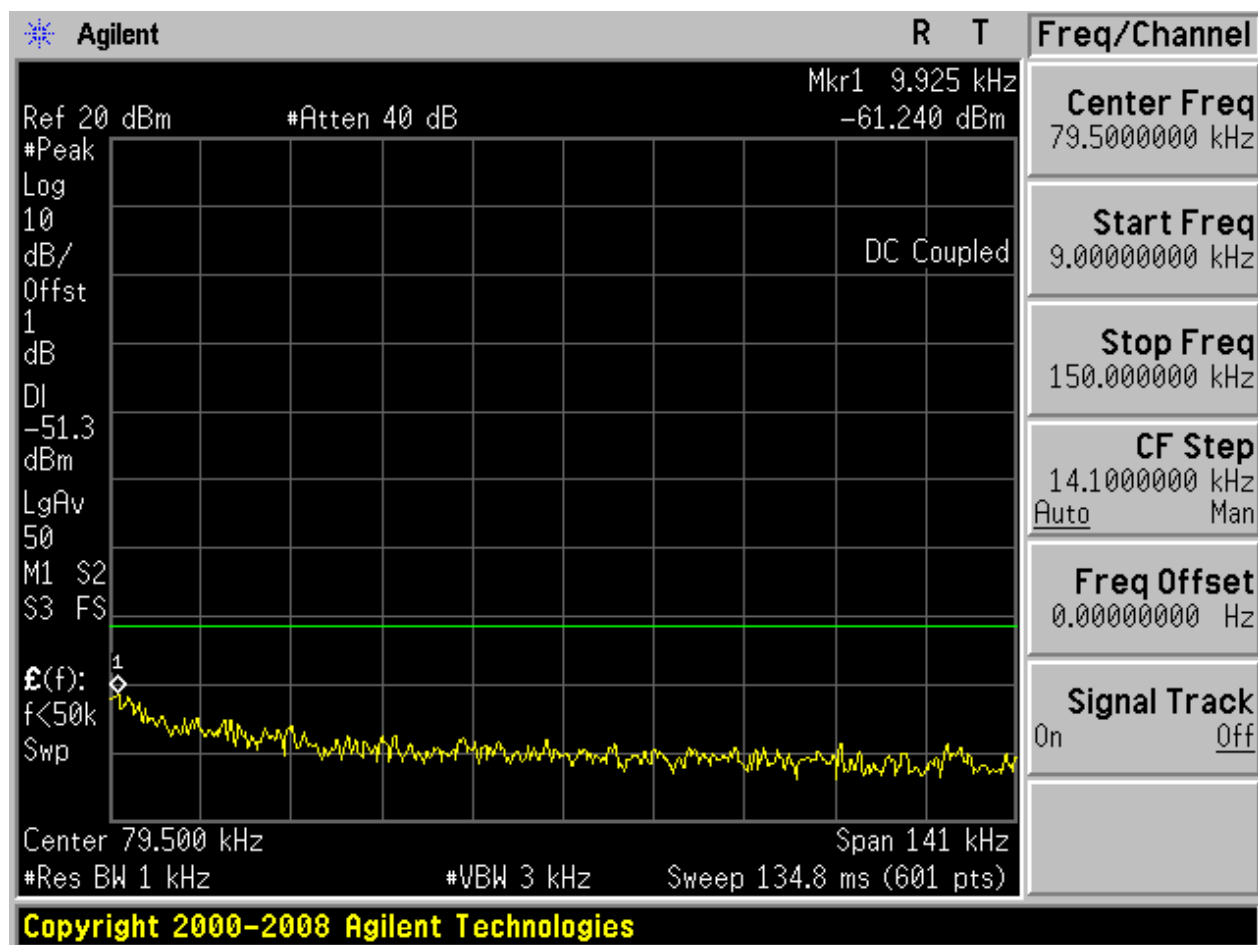


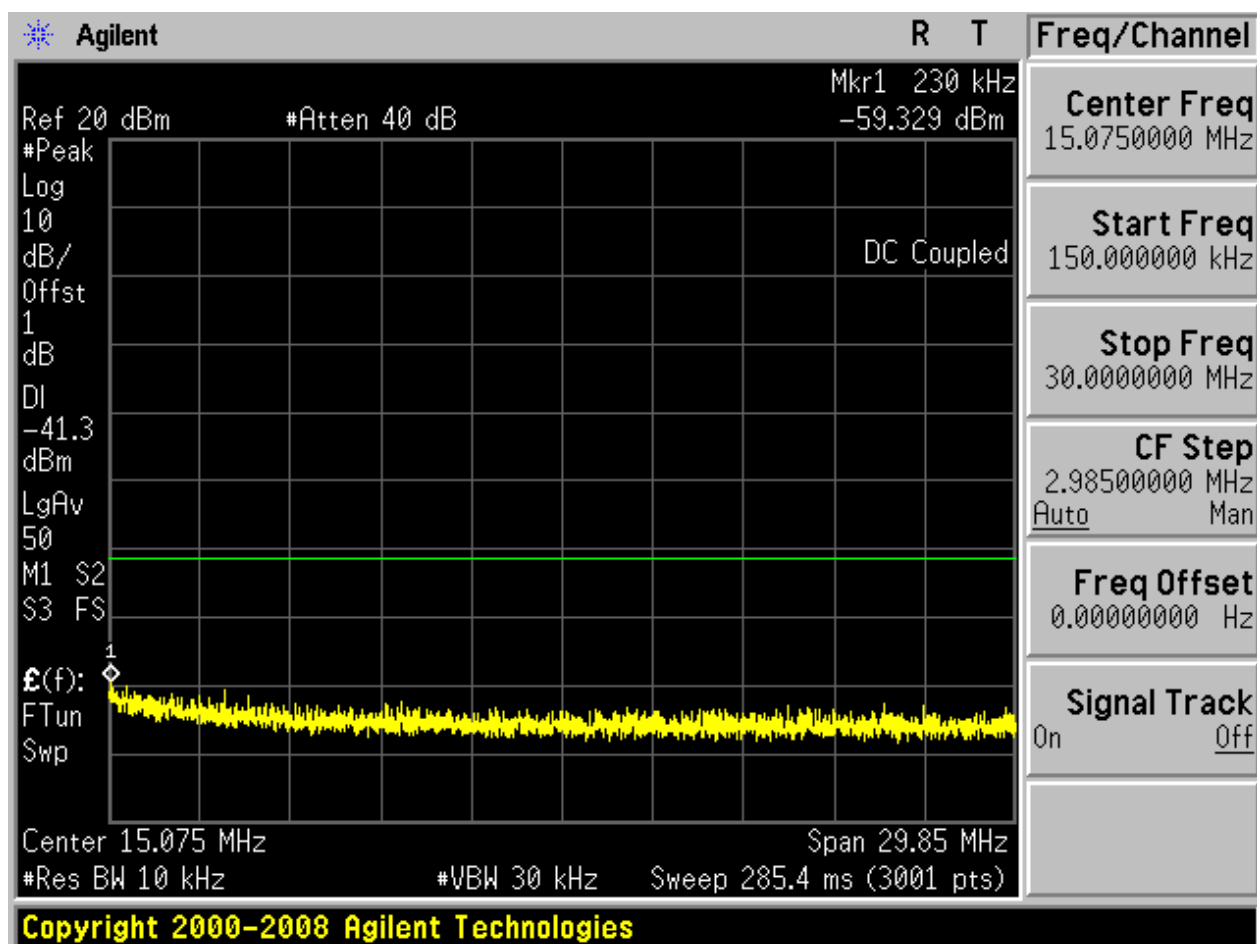

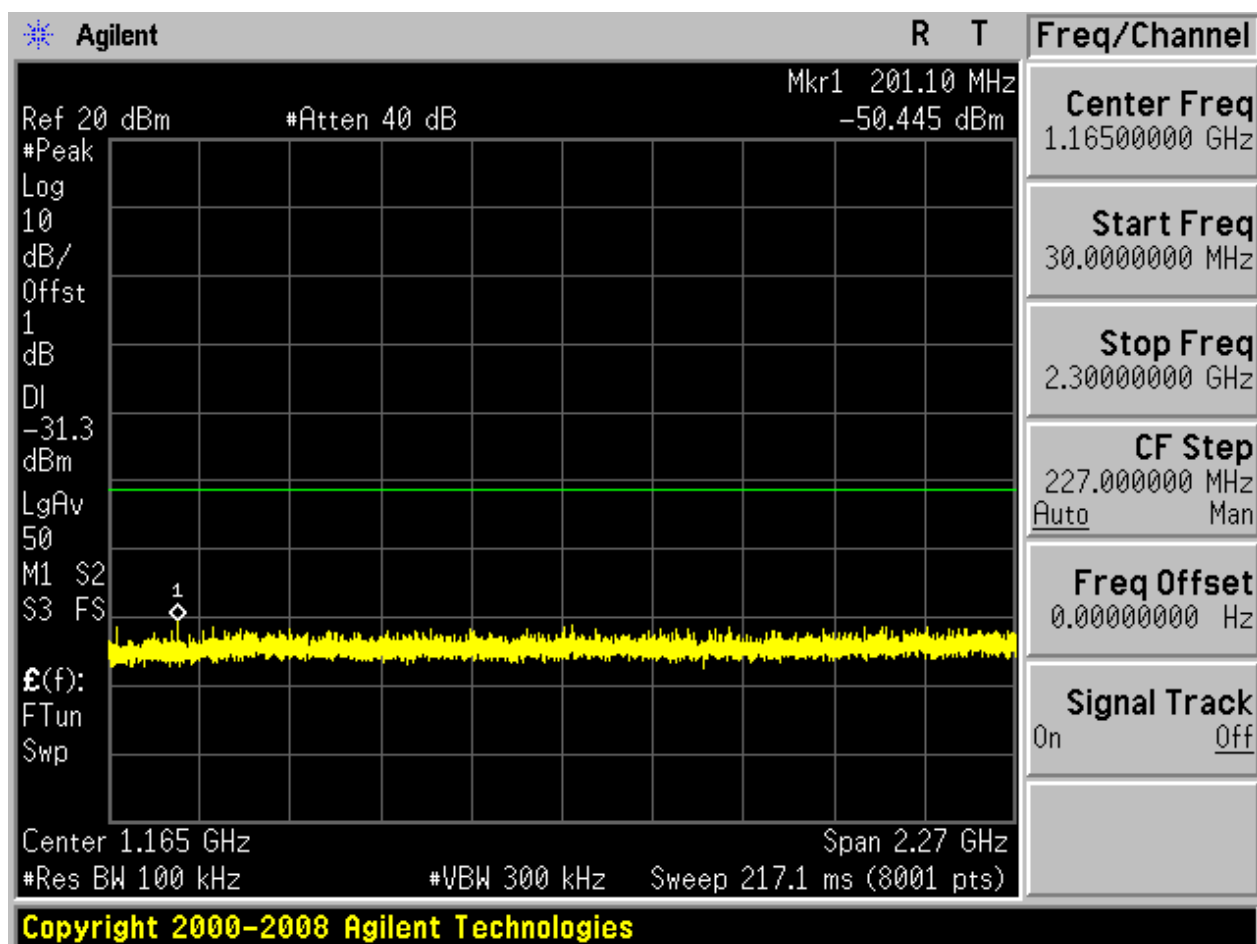

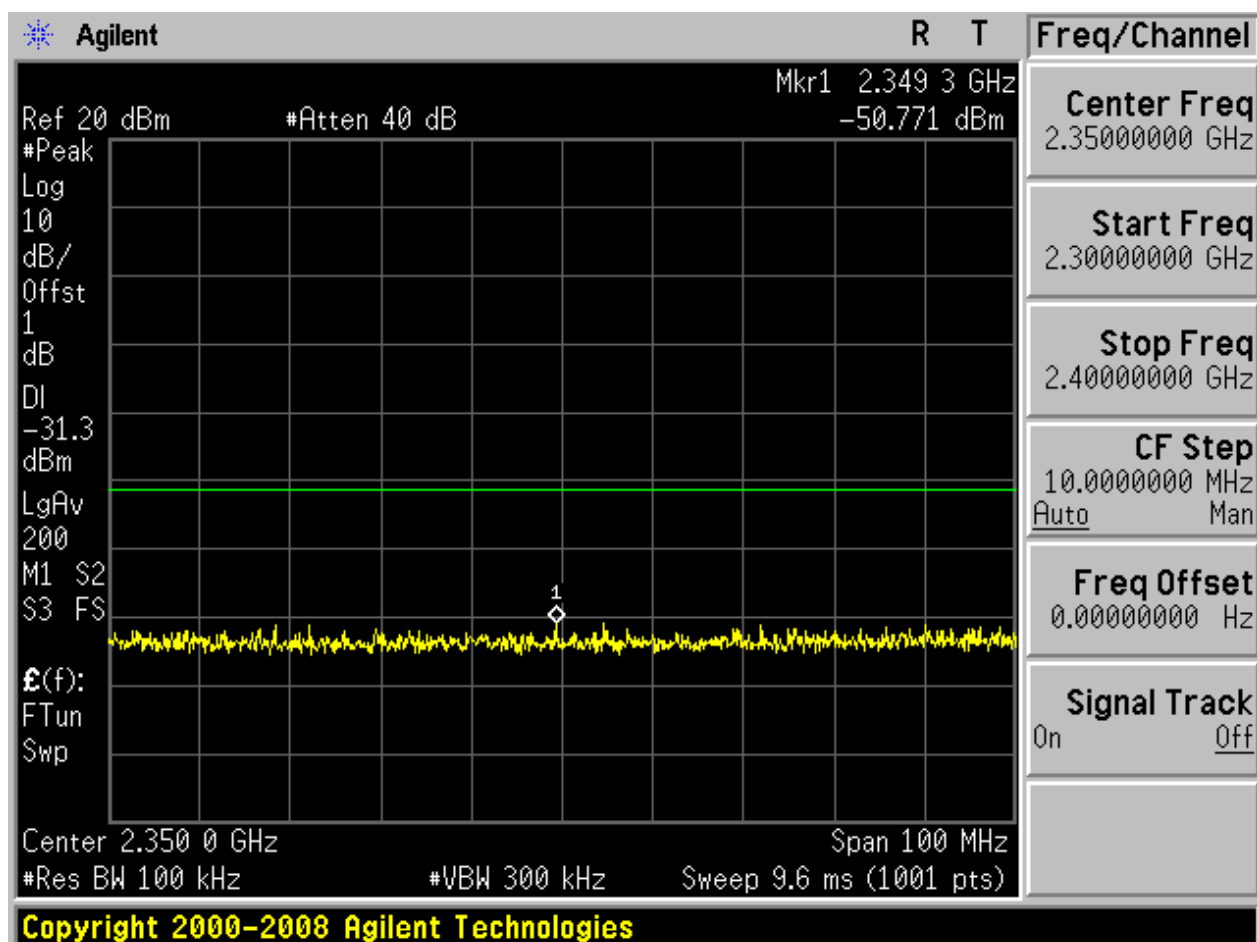


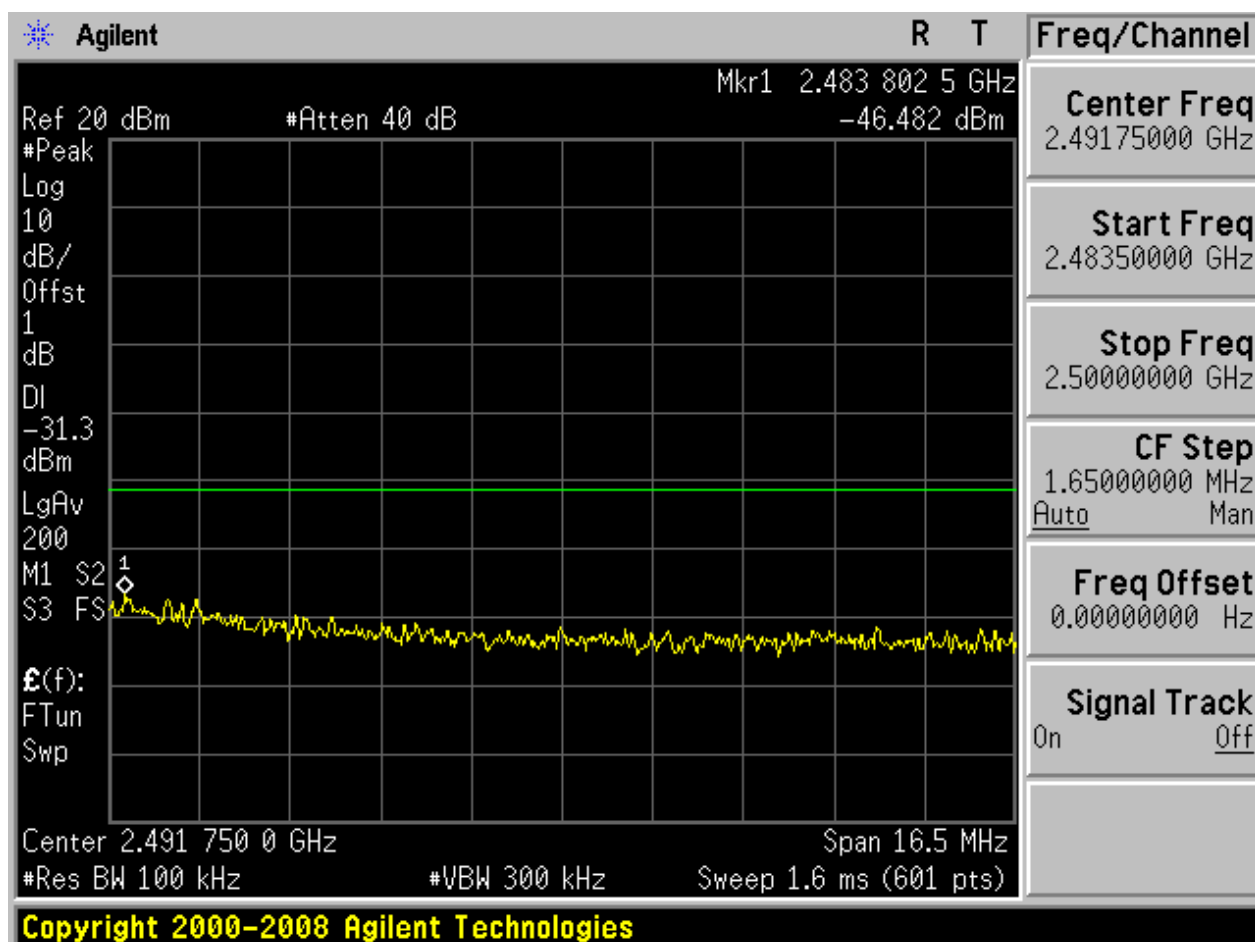

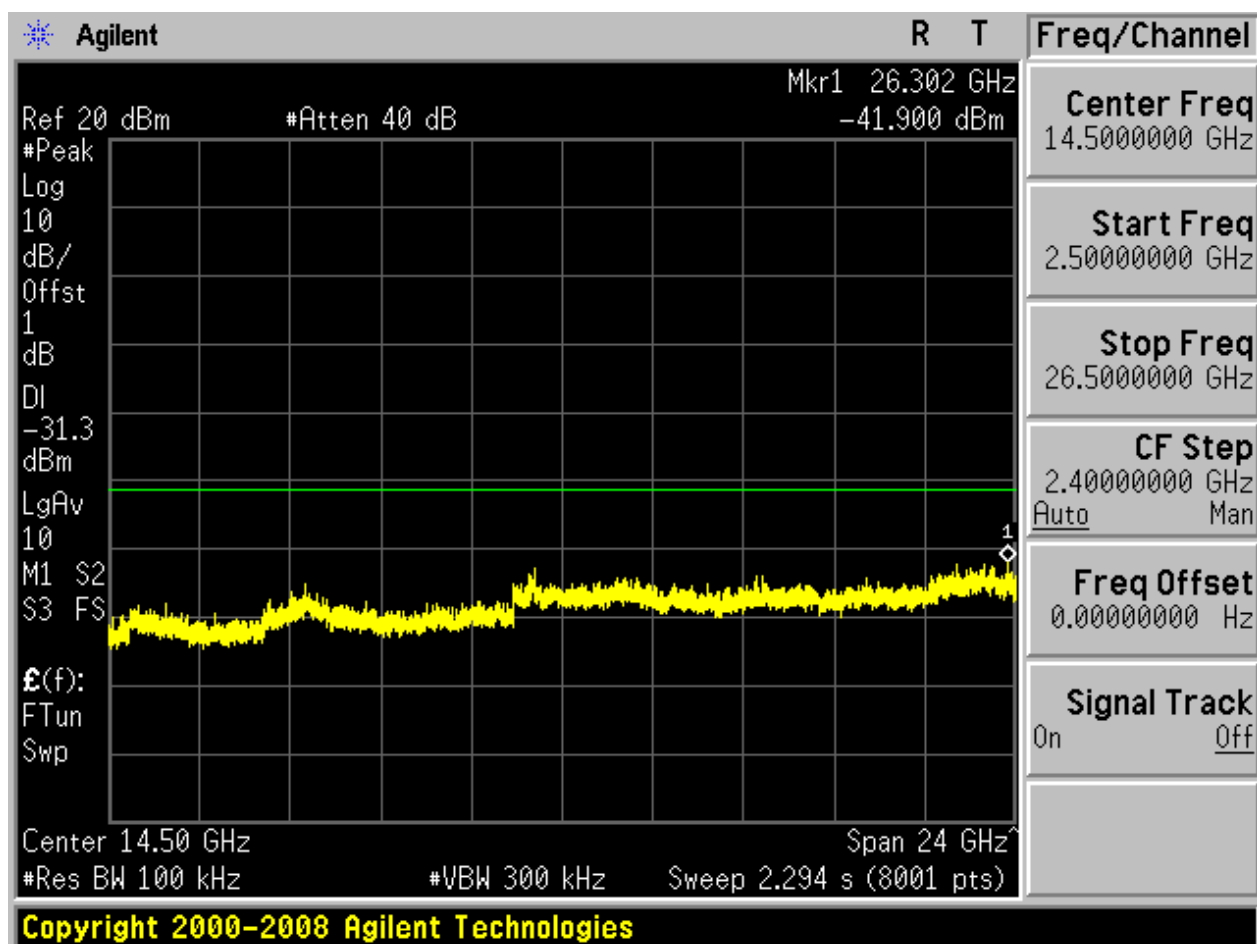


2.18 11N20_H@Ant 2


Pref:

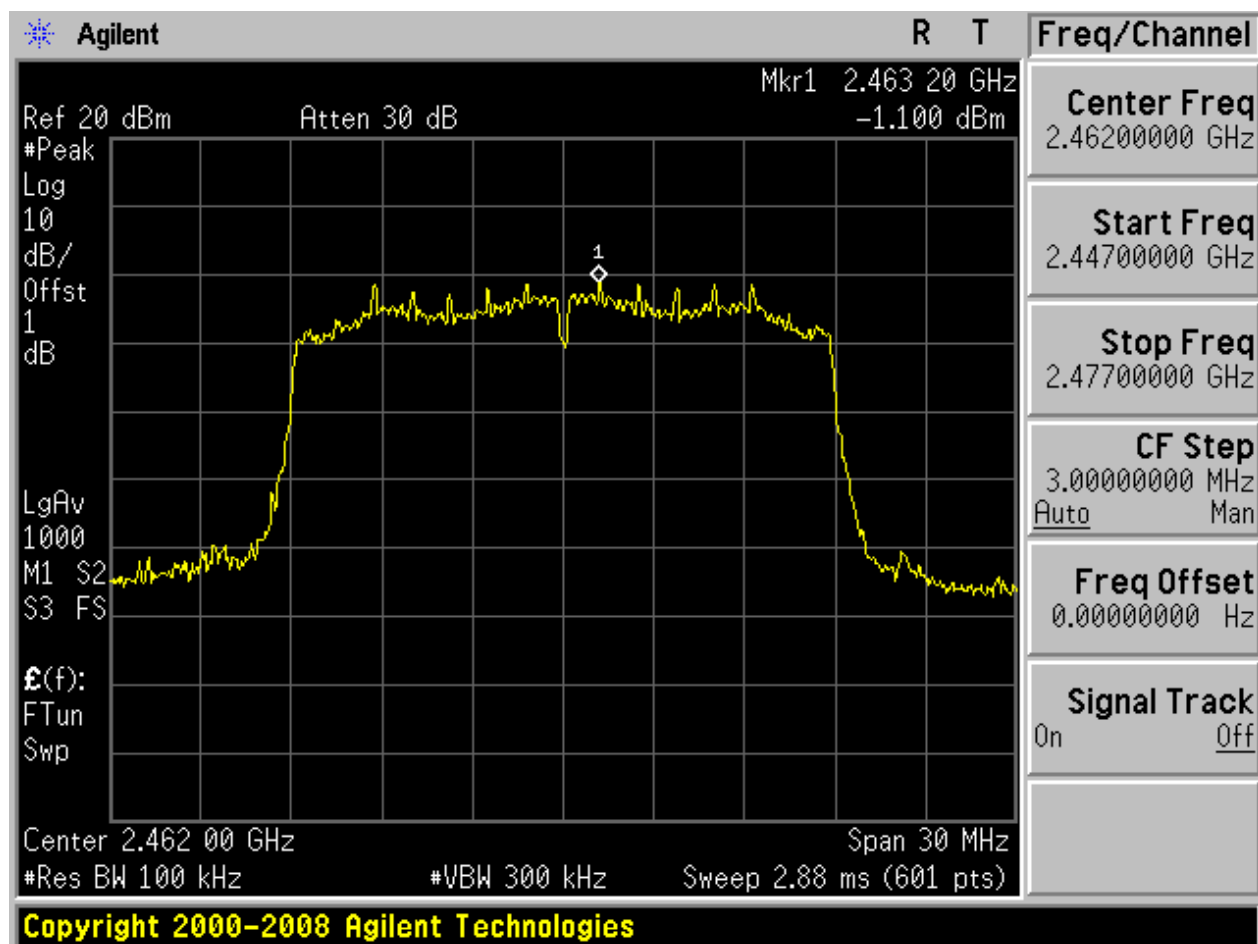






Puw:

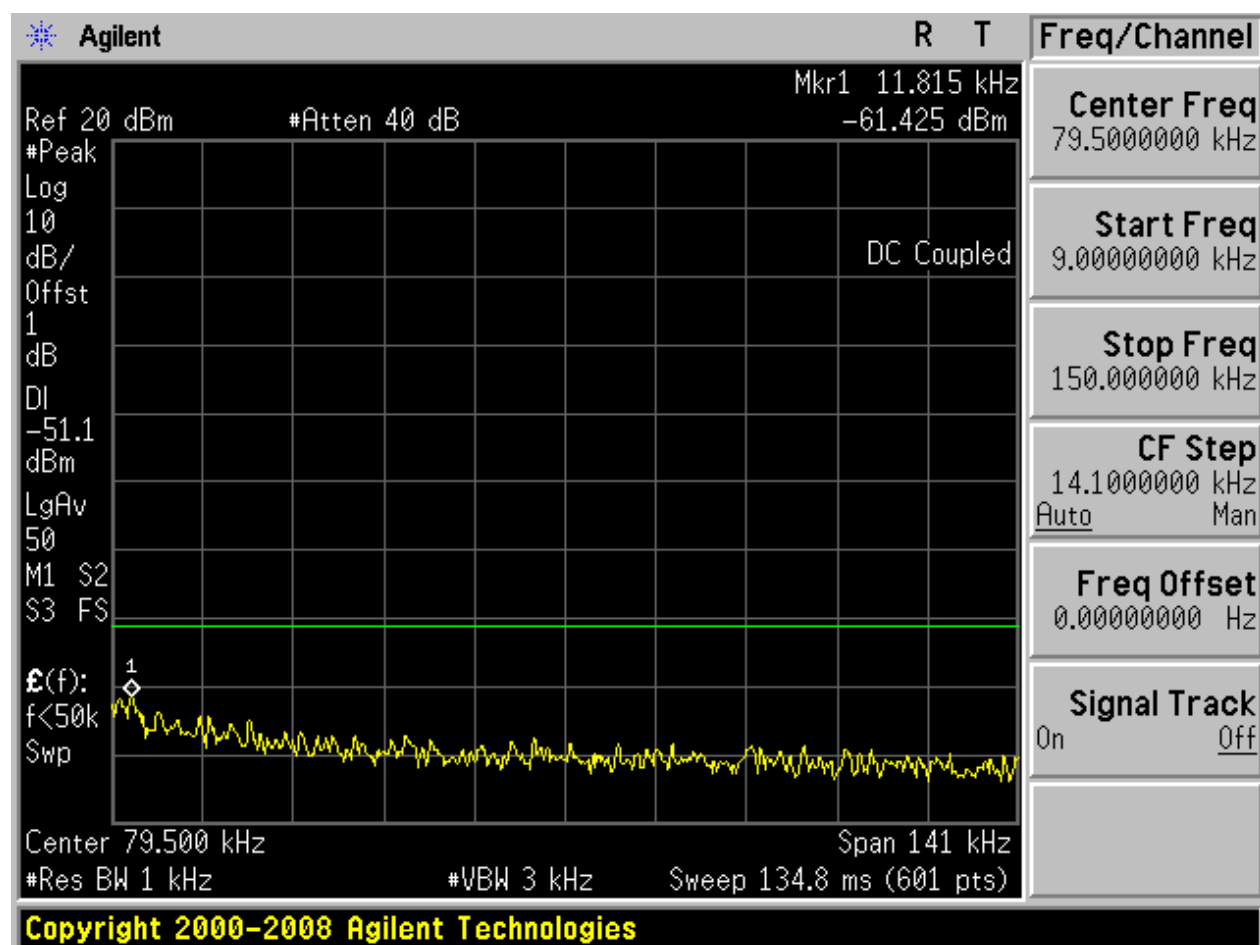


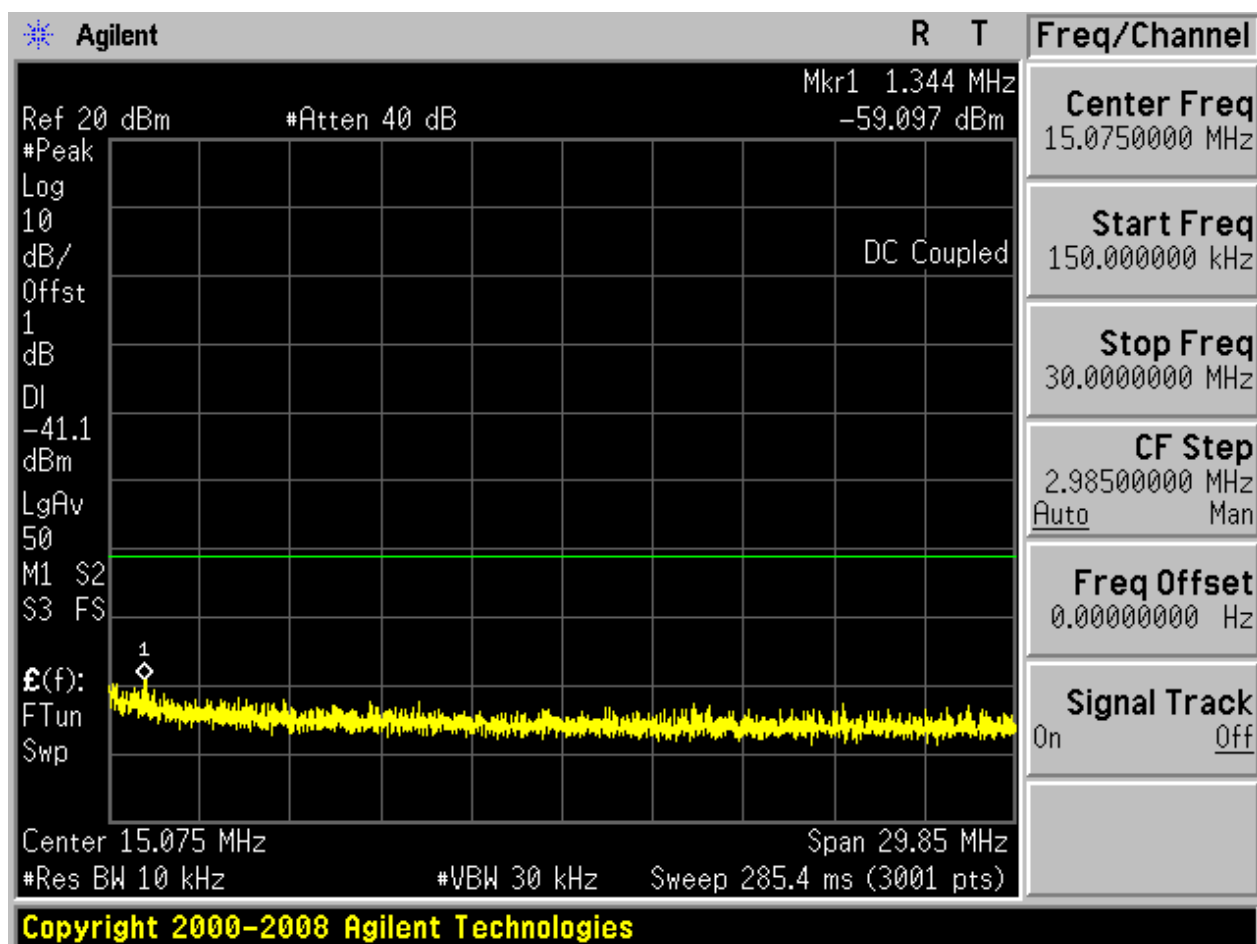

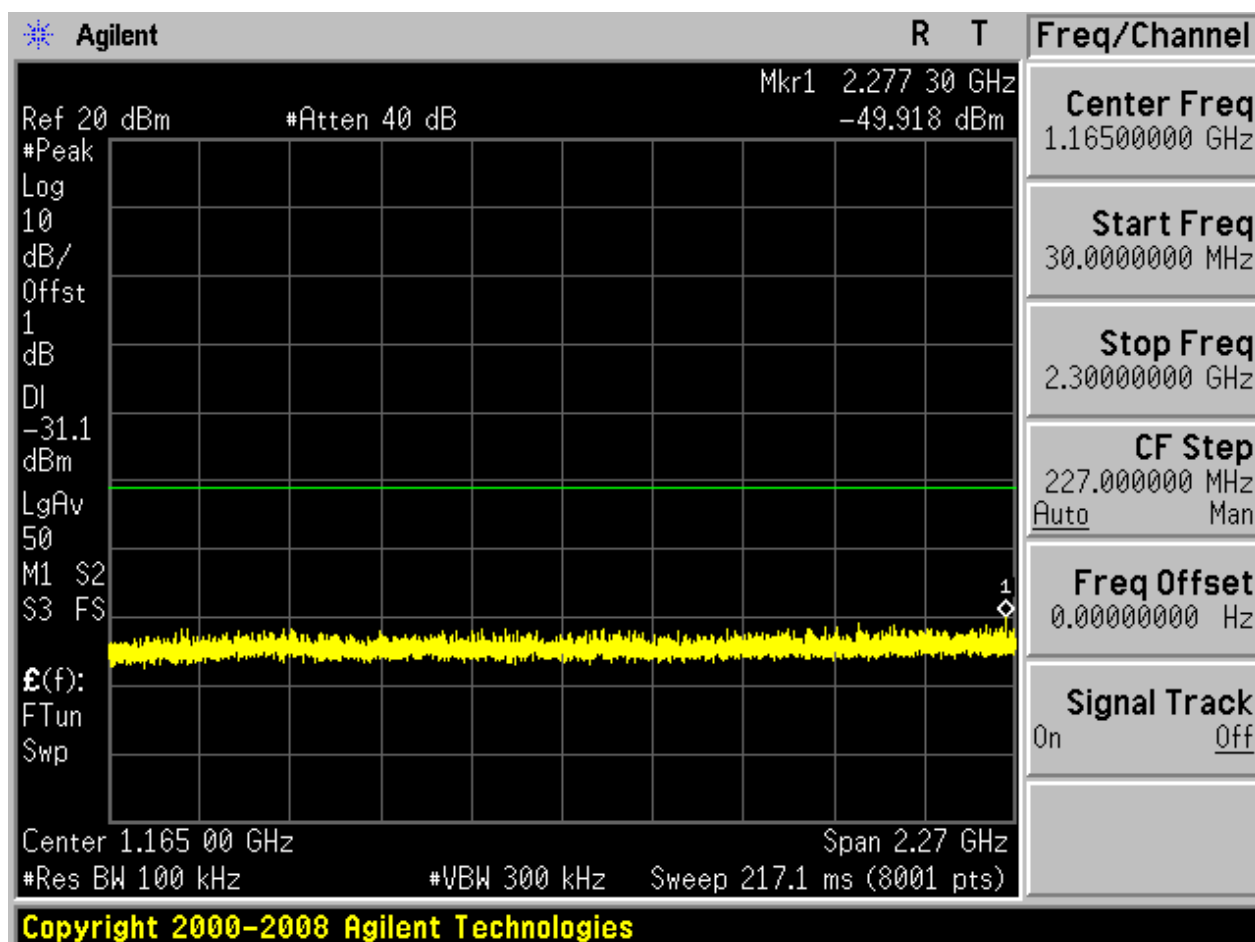

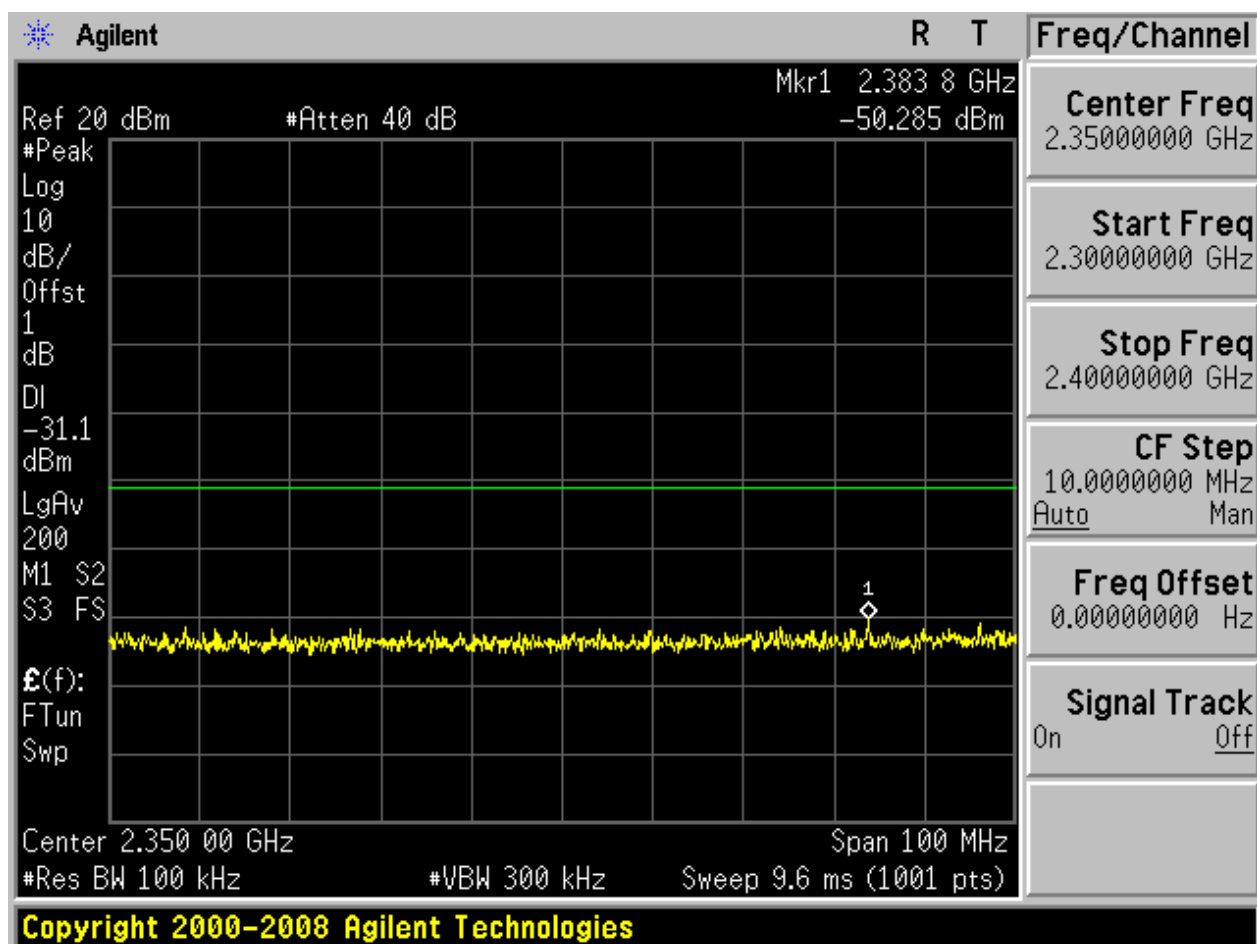

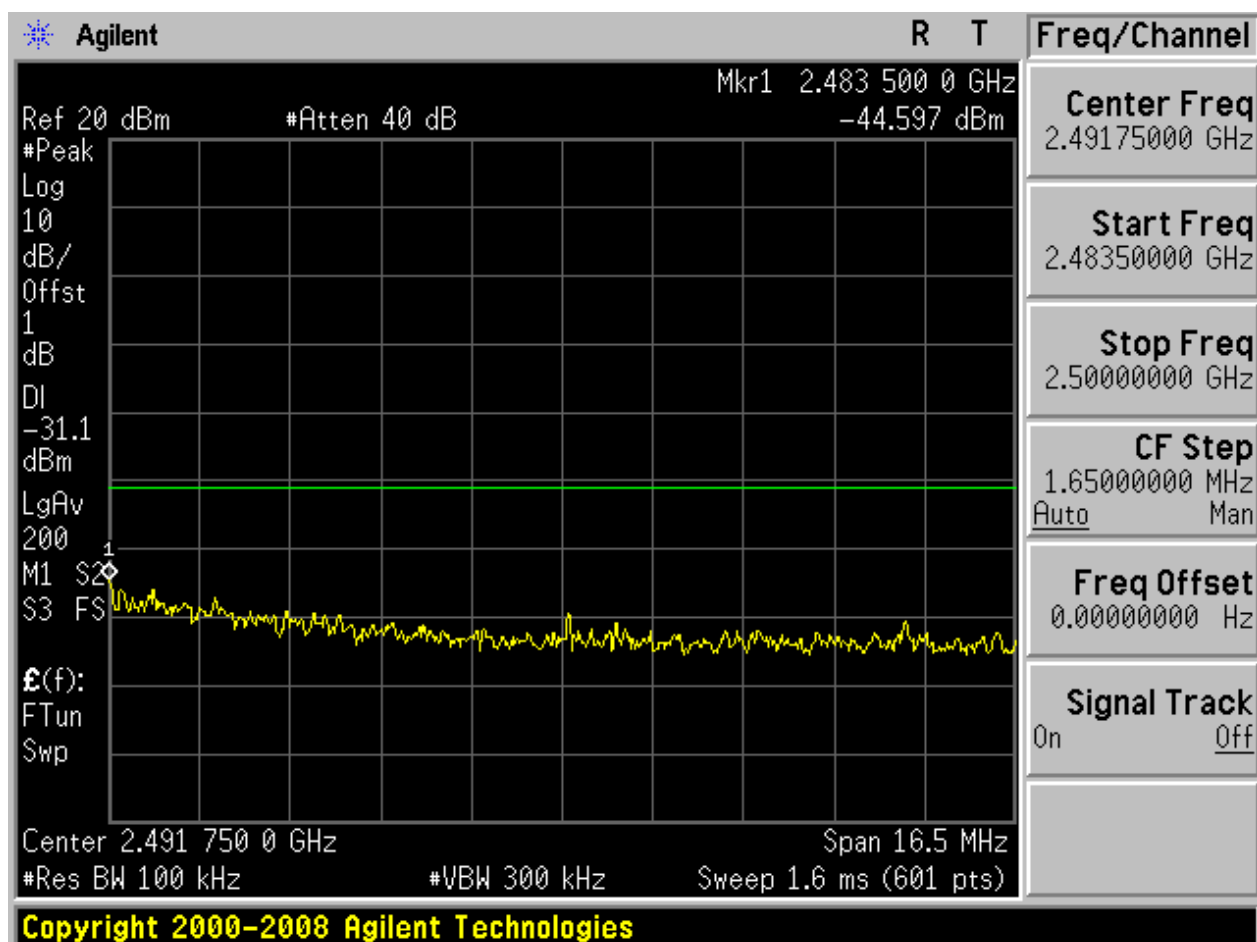


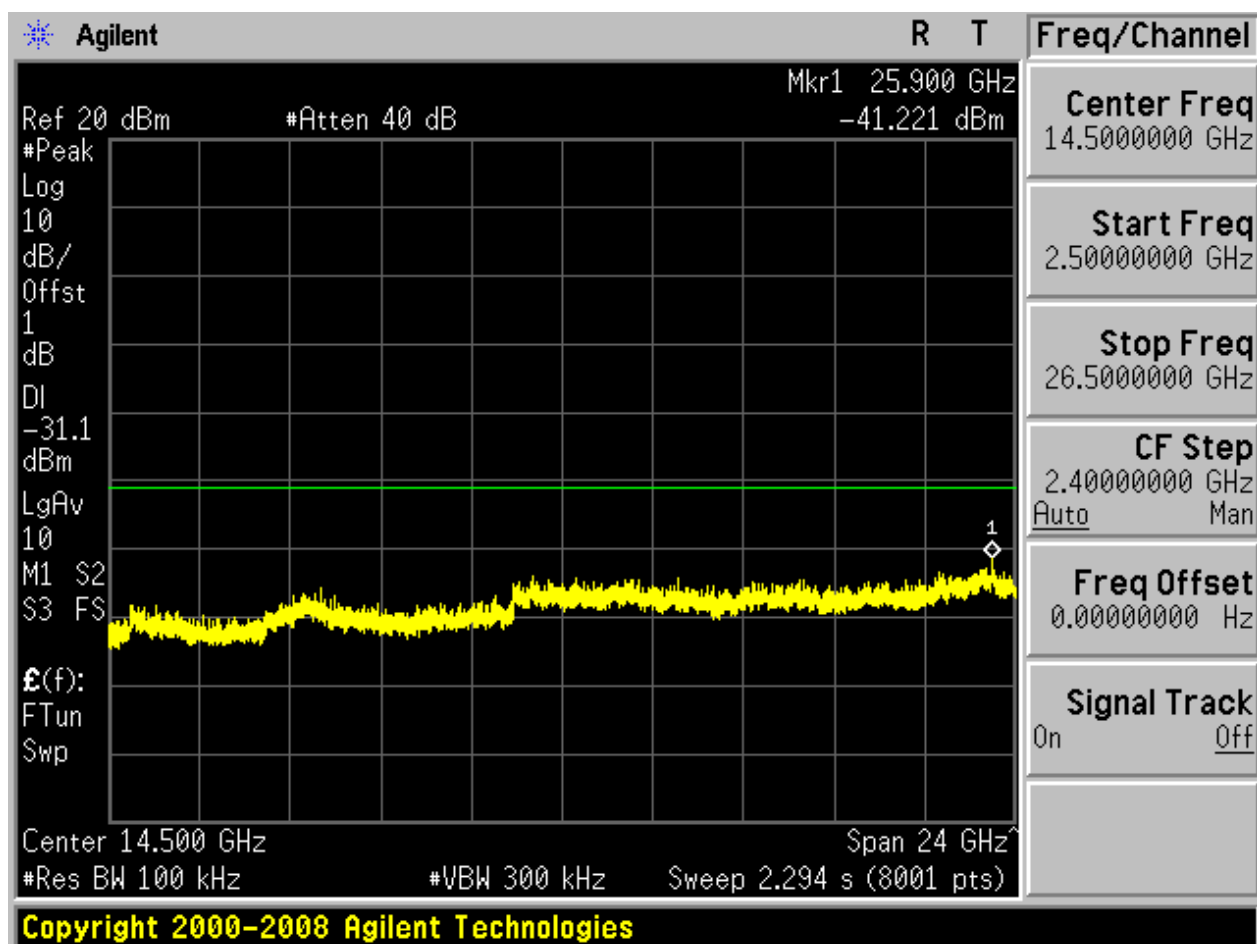




2.13 11N20m_L@Ant 1


Pref:

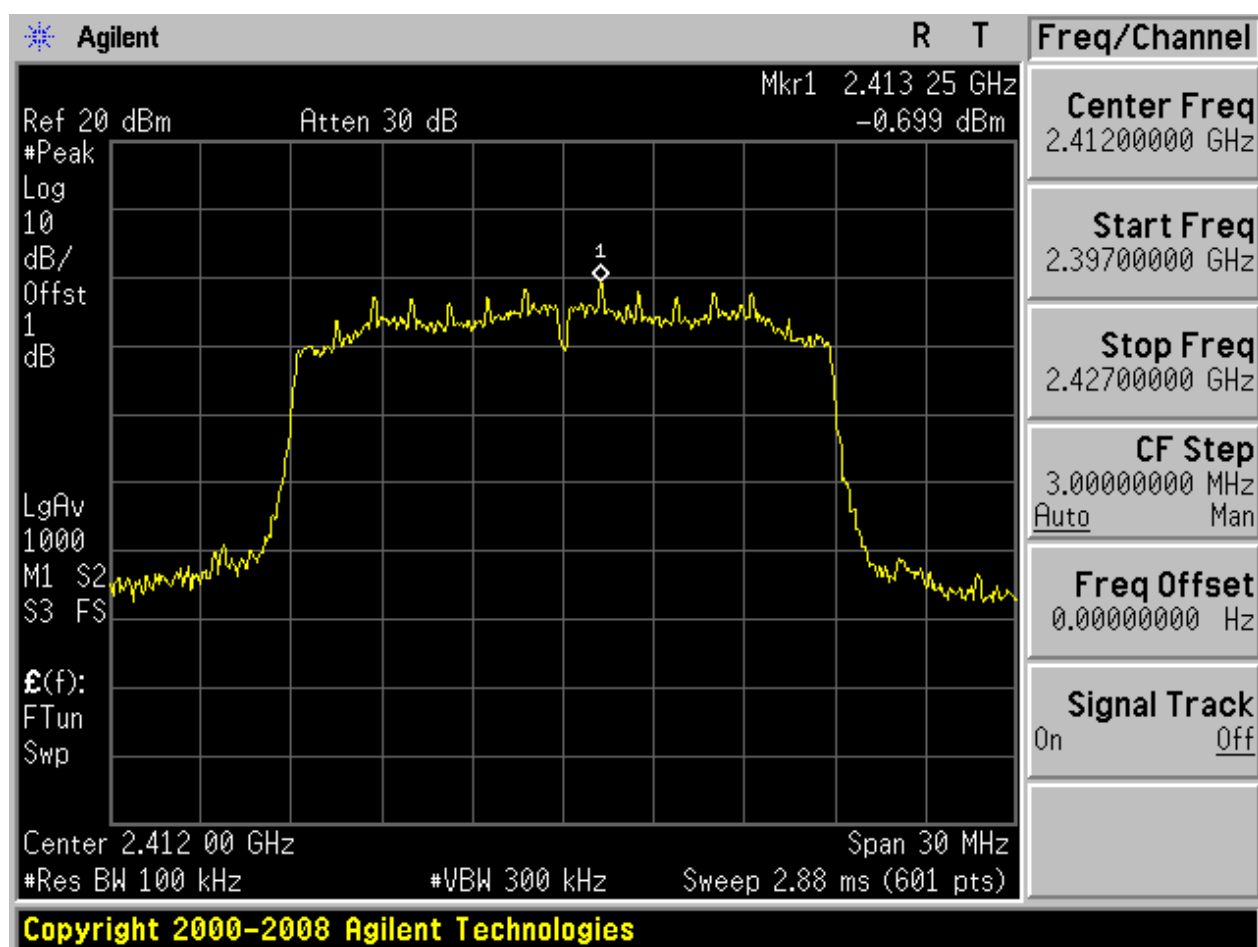






Puw:

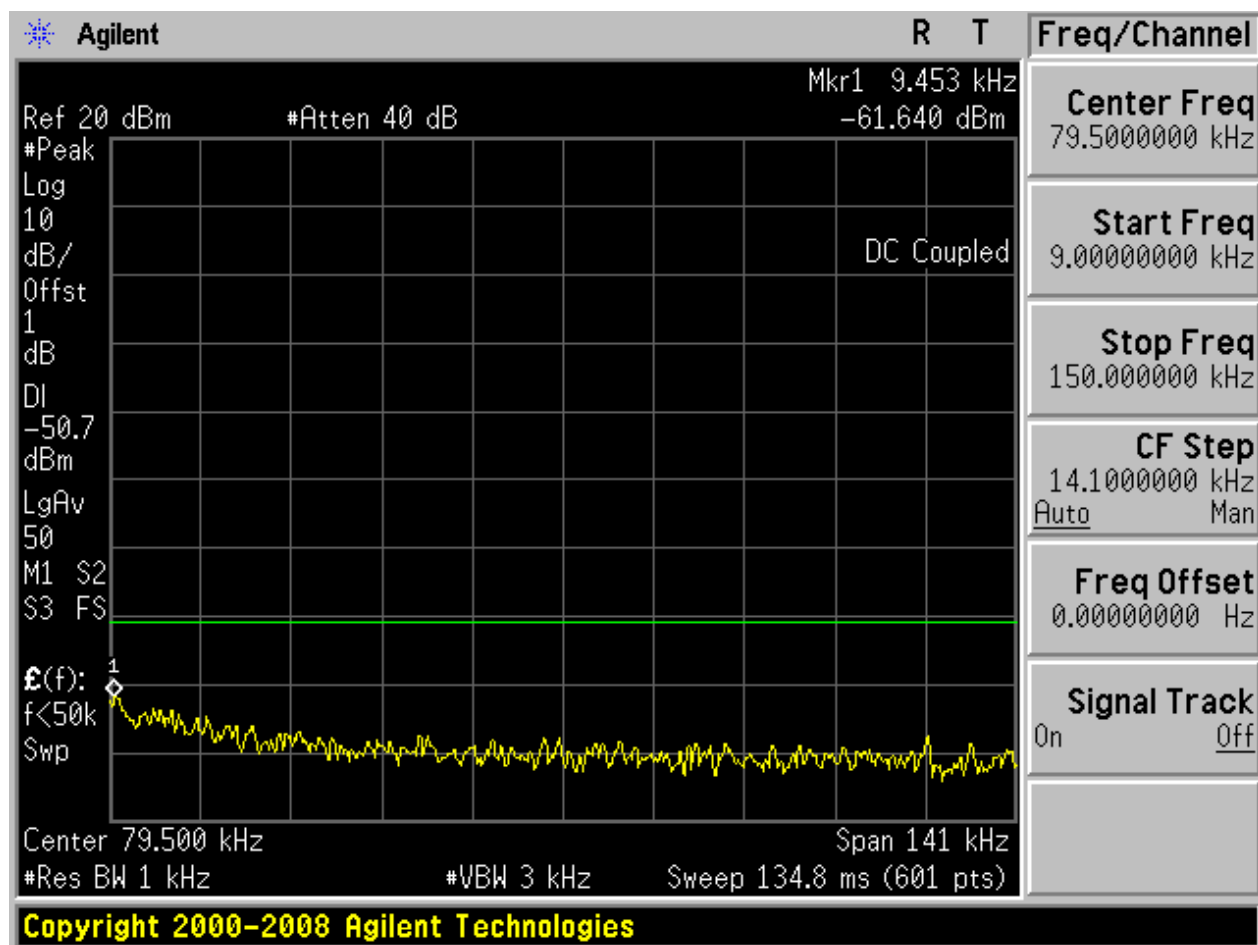


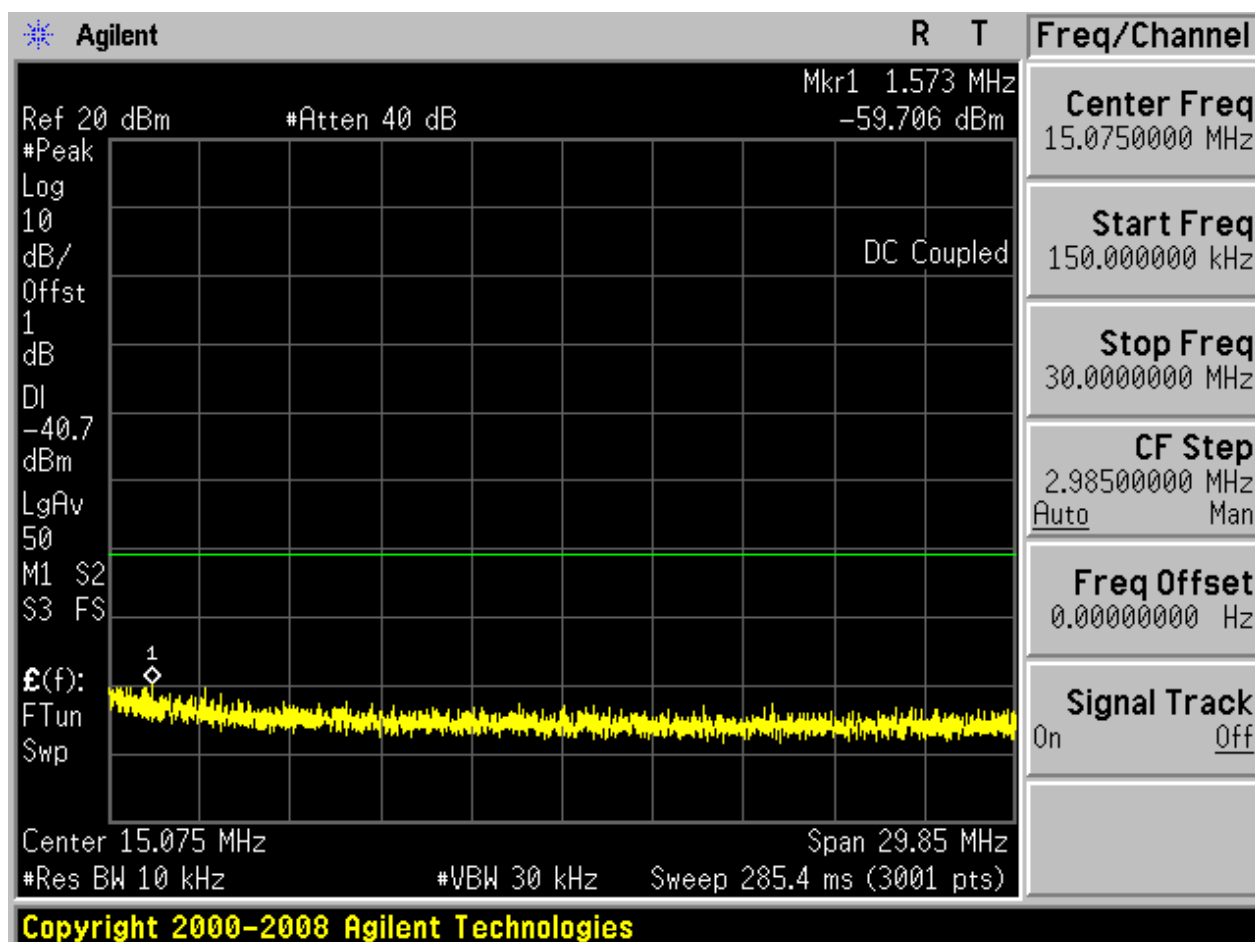

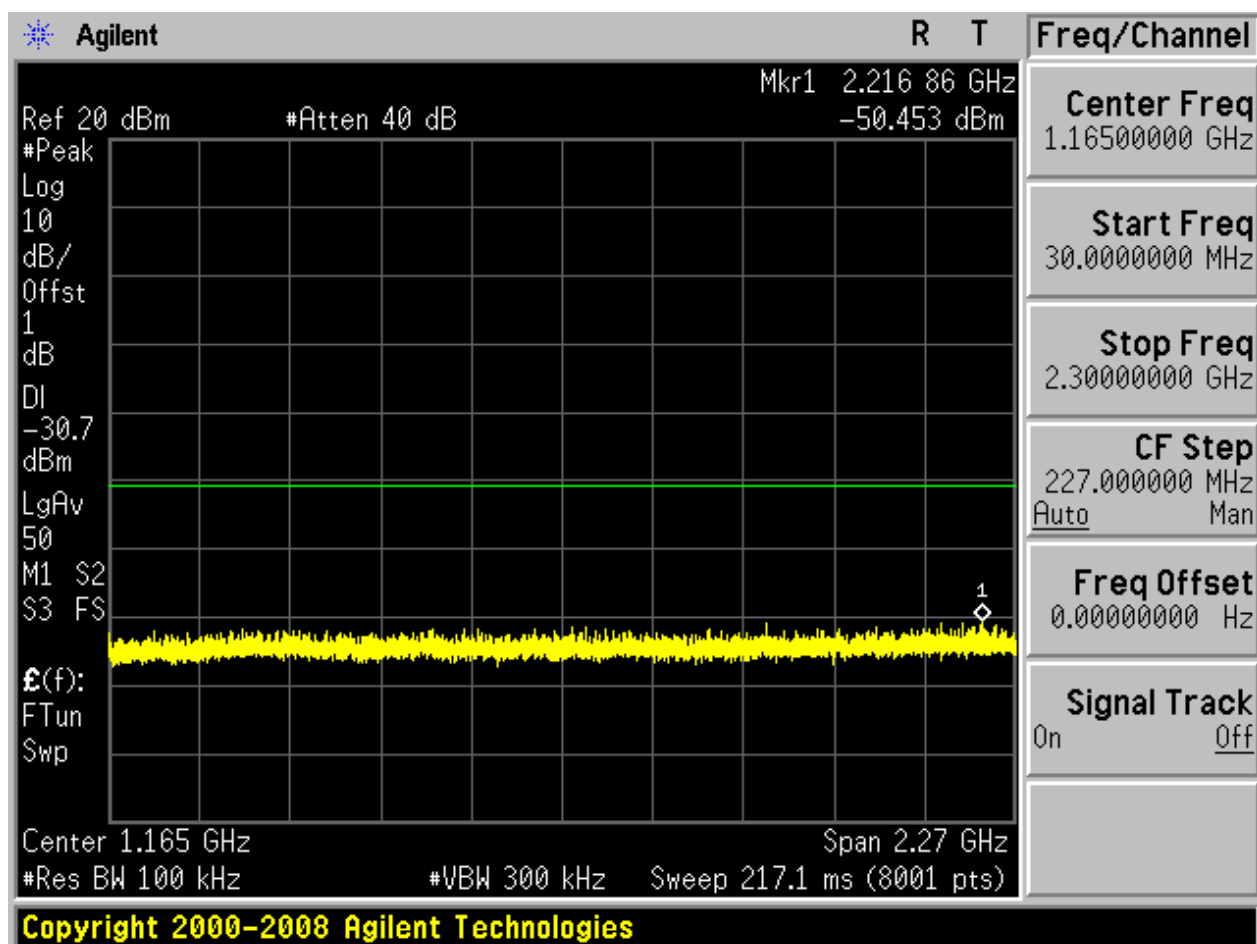

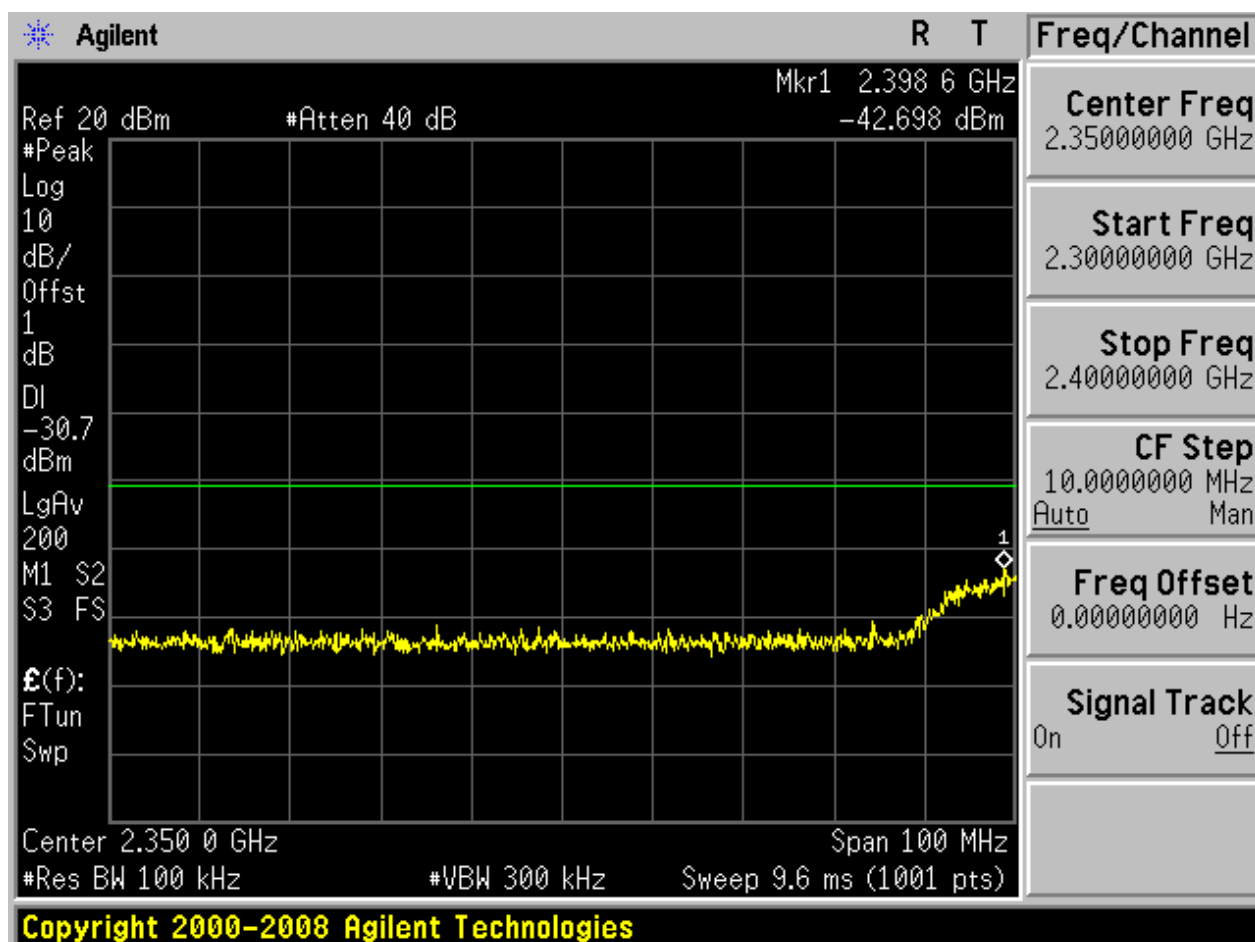


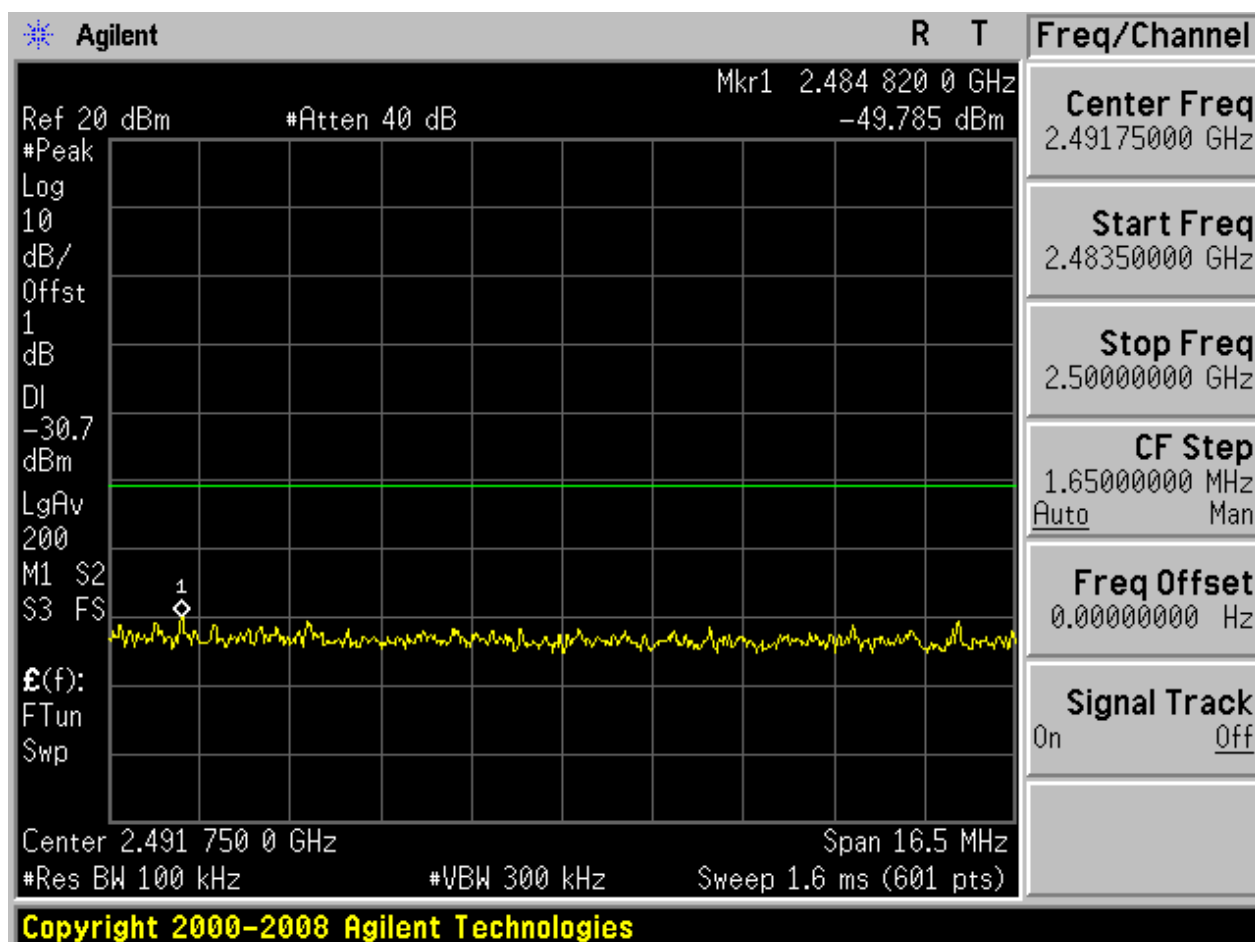

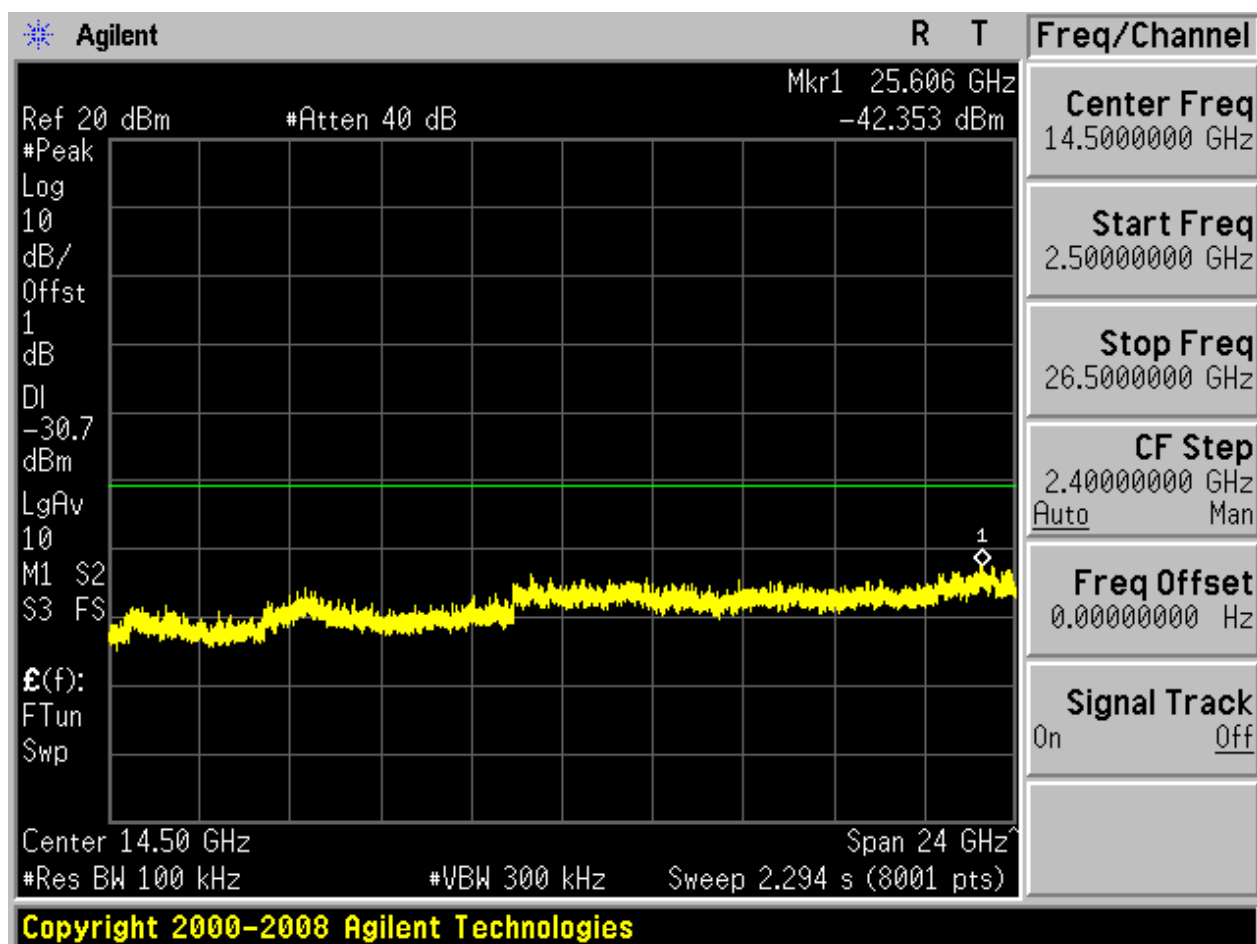



2.14 11N20m_L@Ant 2


Pref:

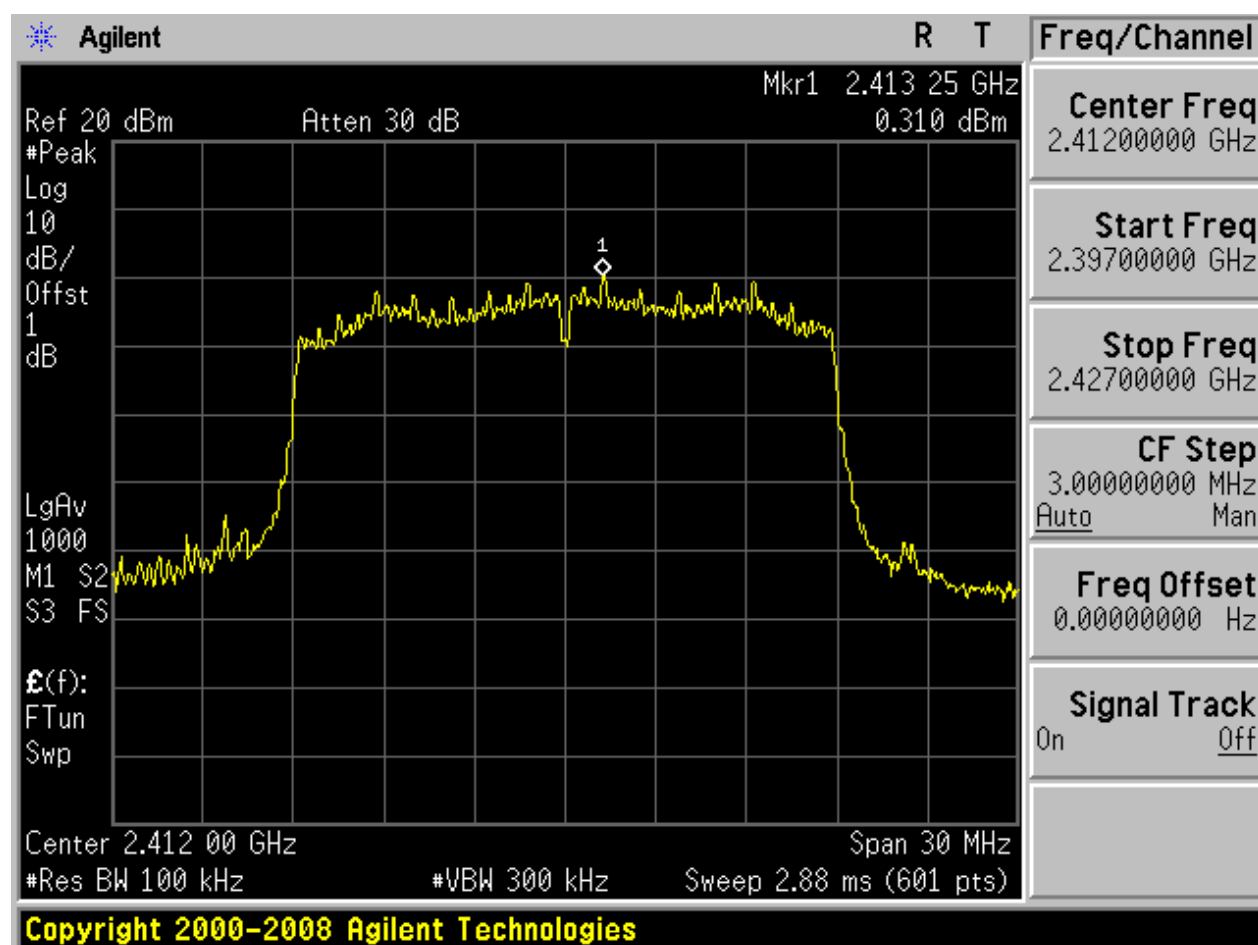



Puw:

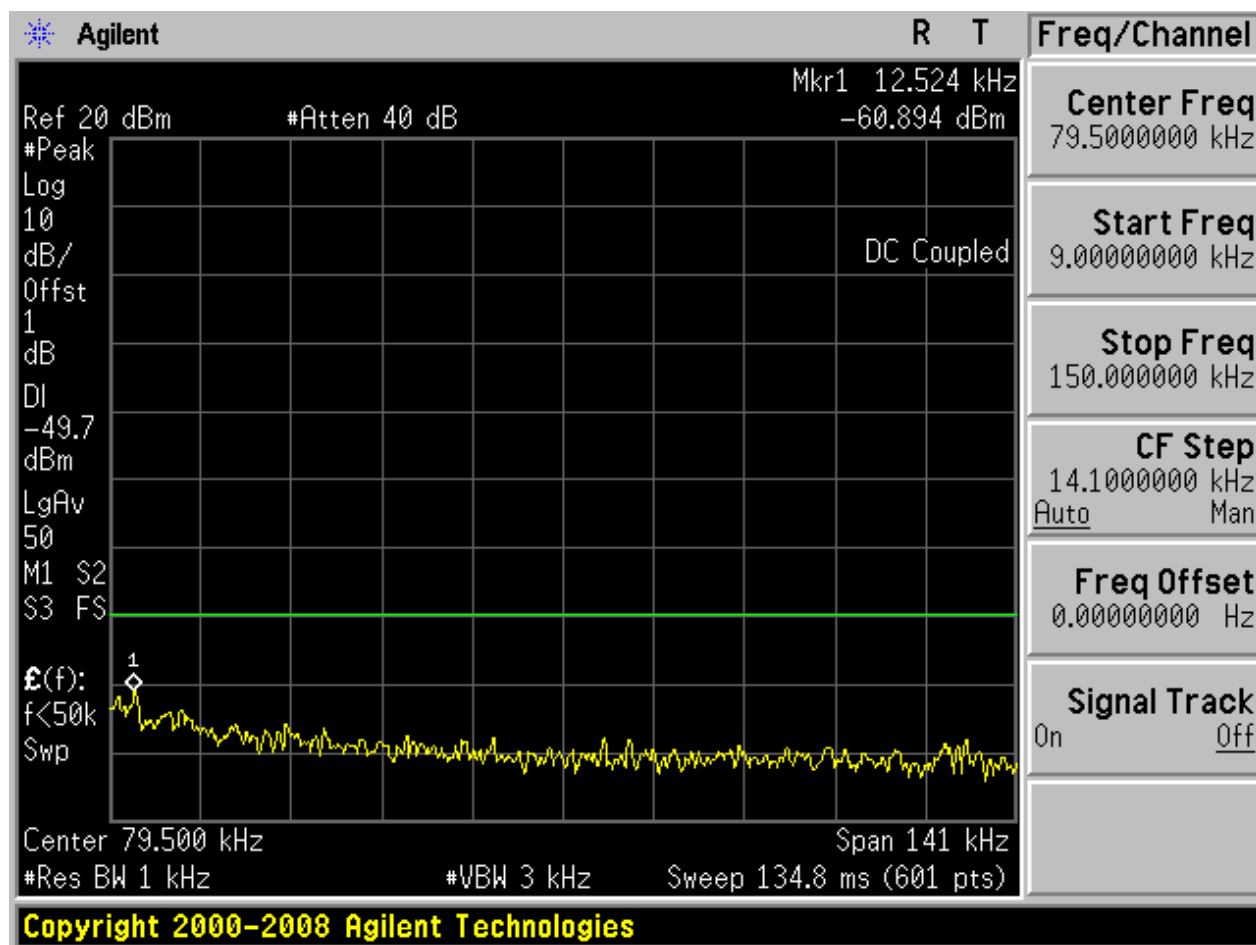


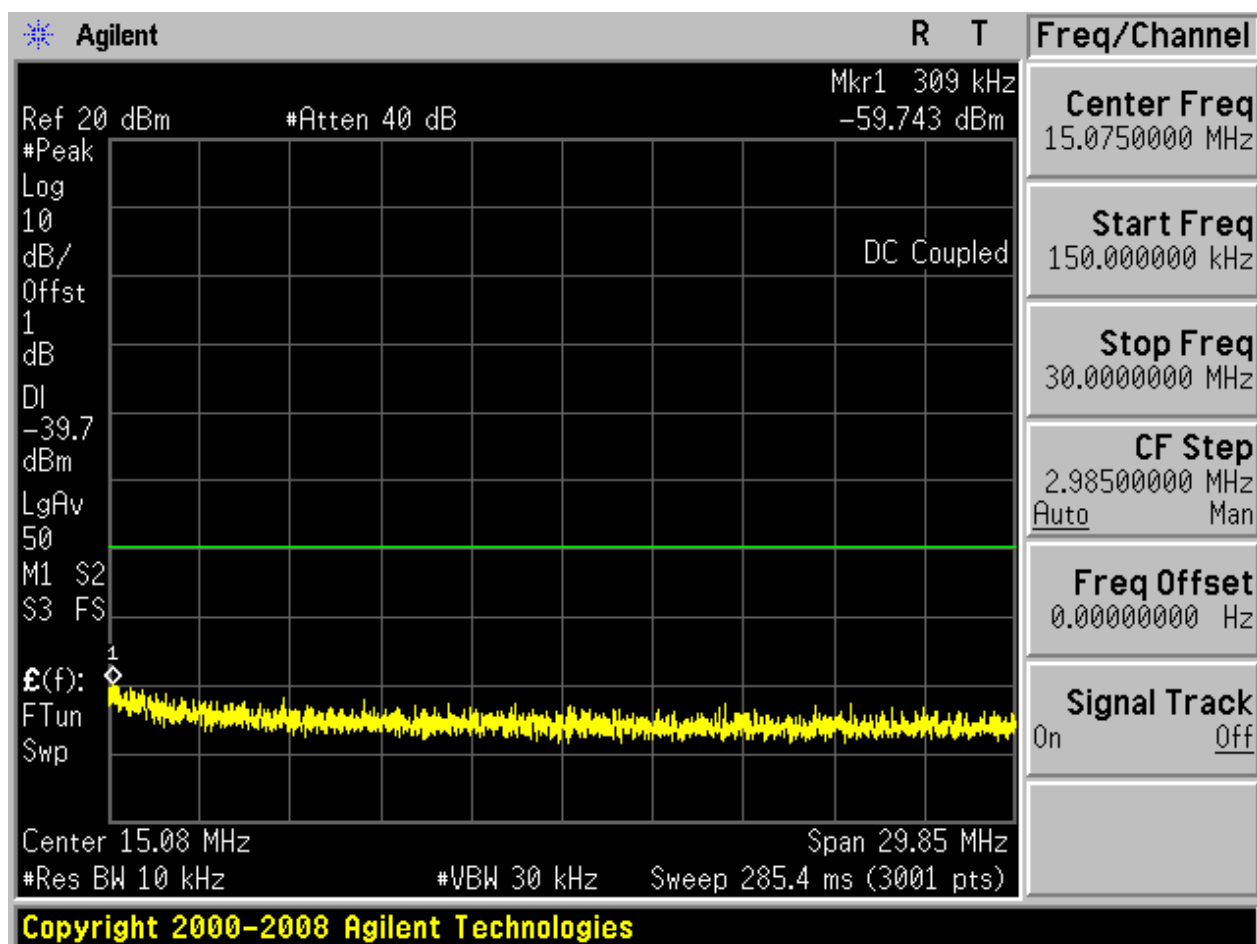

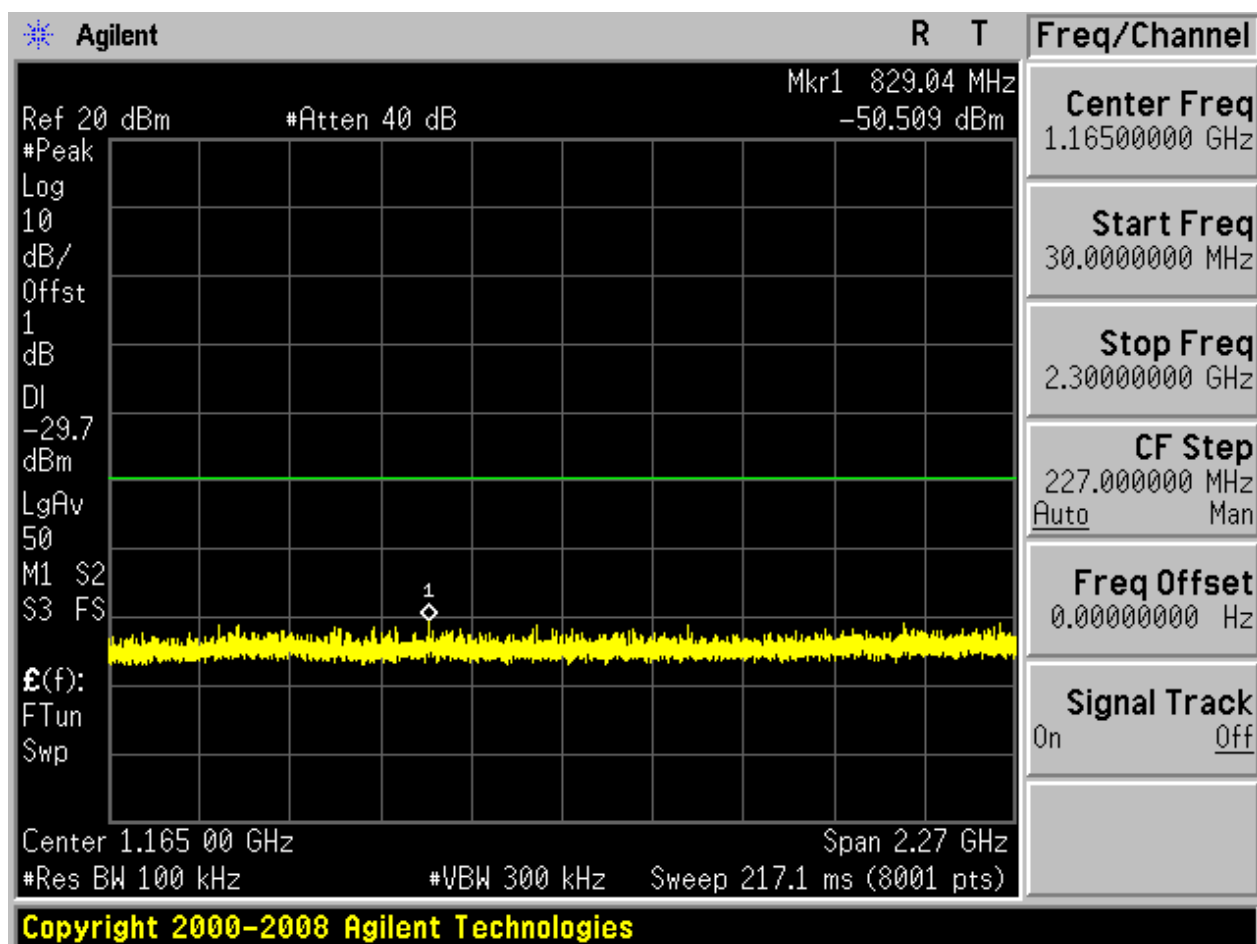

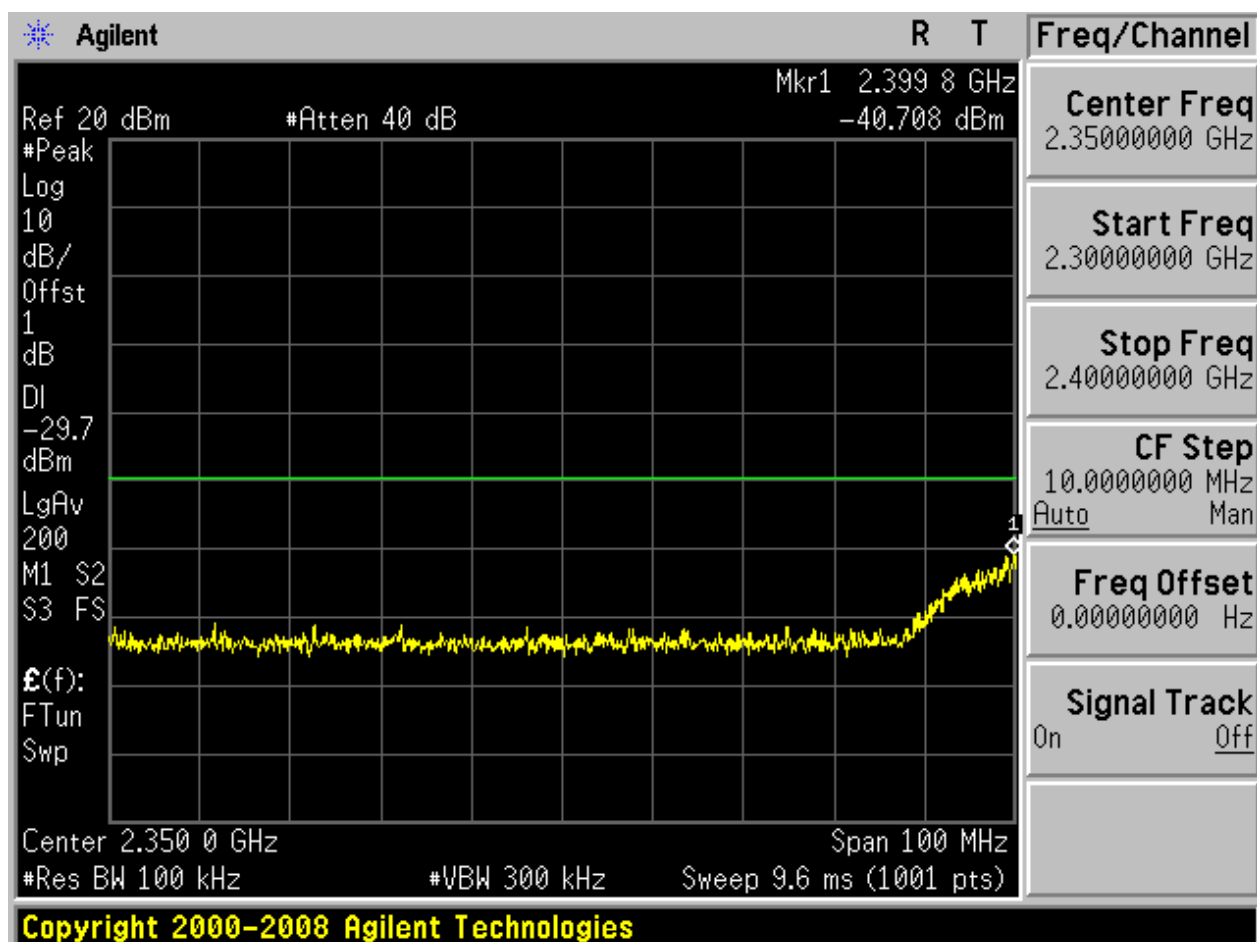


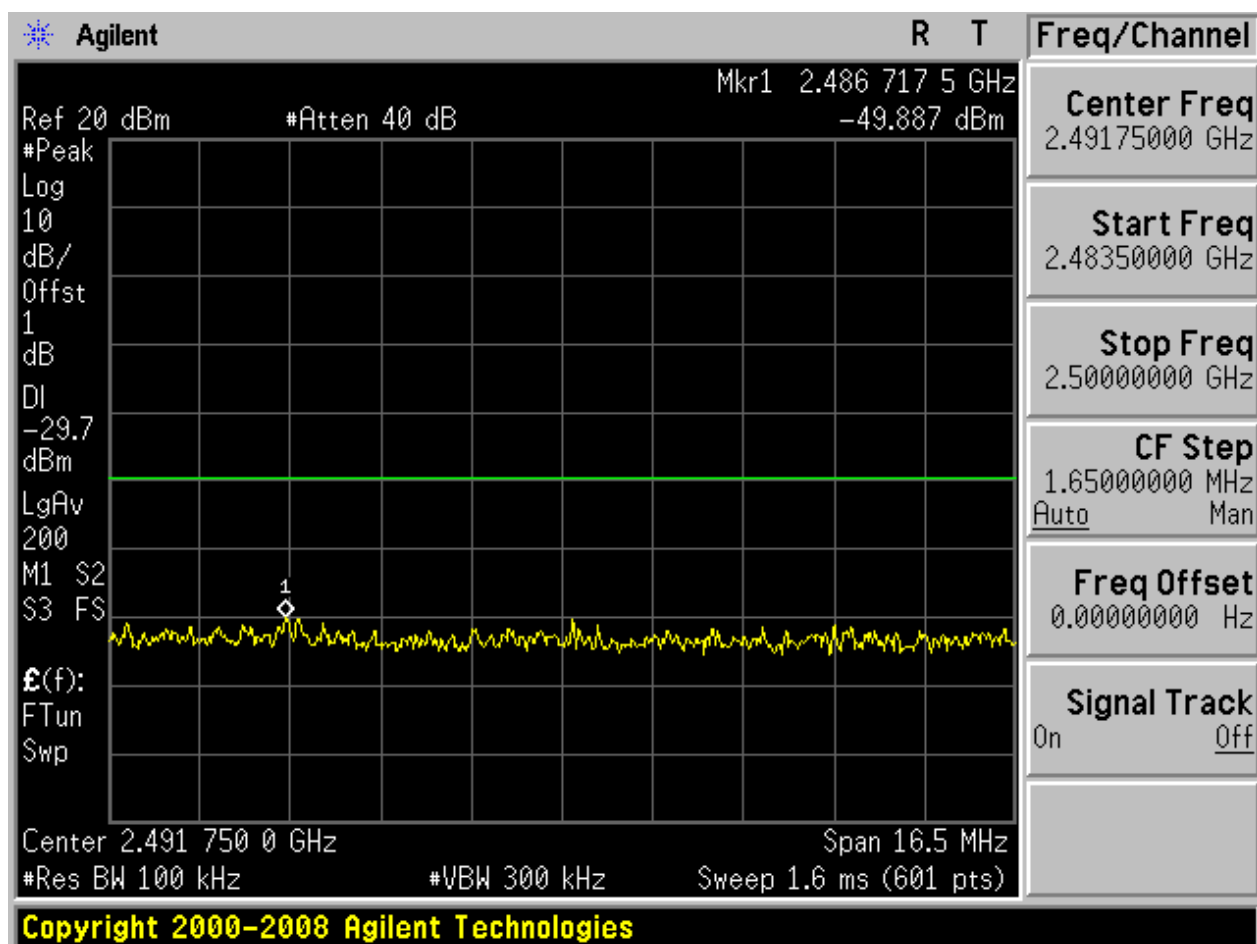

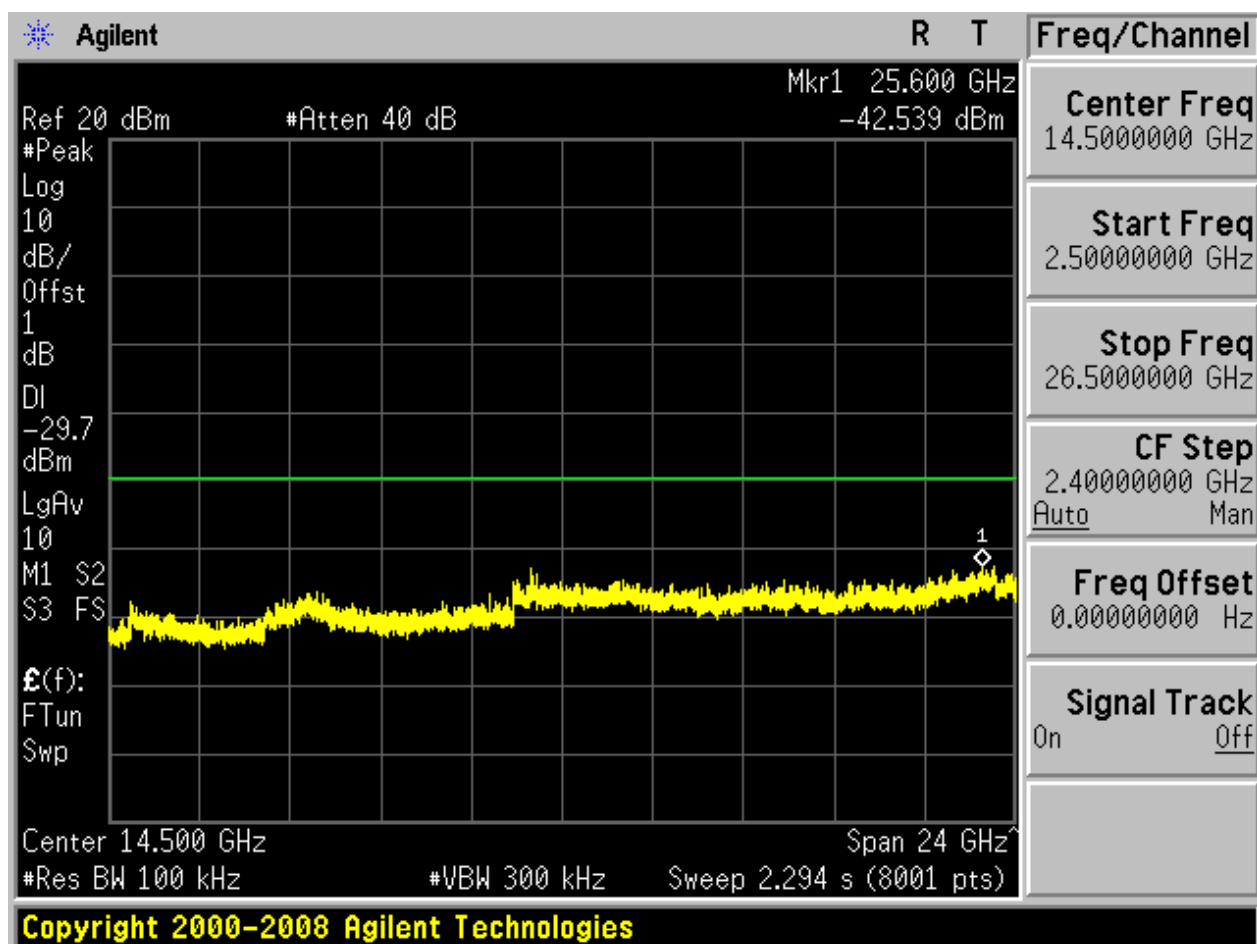


2.15 11N20m_M@Ant 1


Pref:

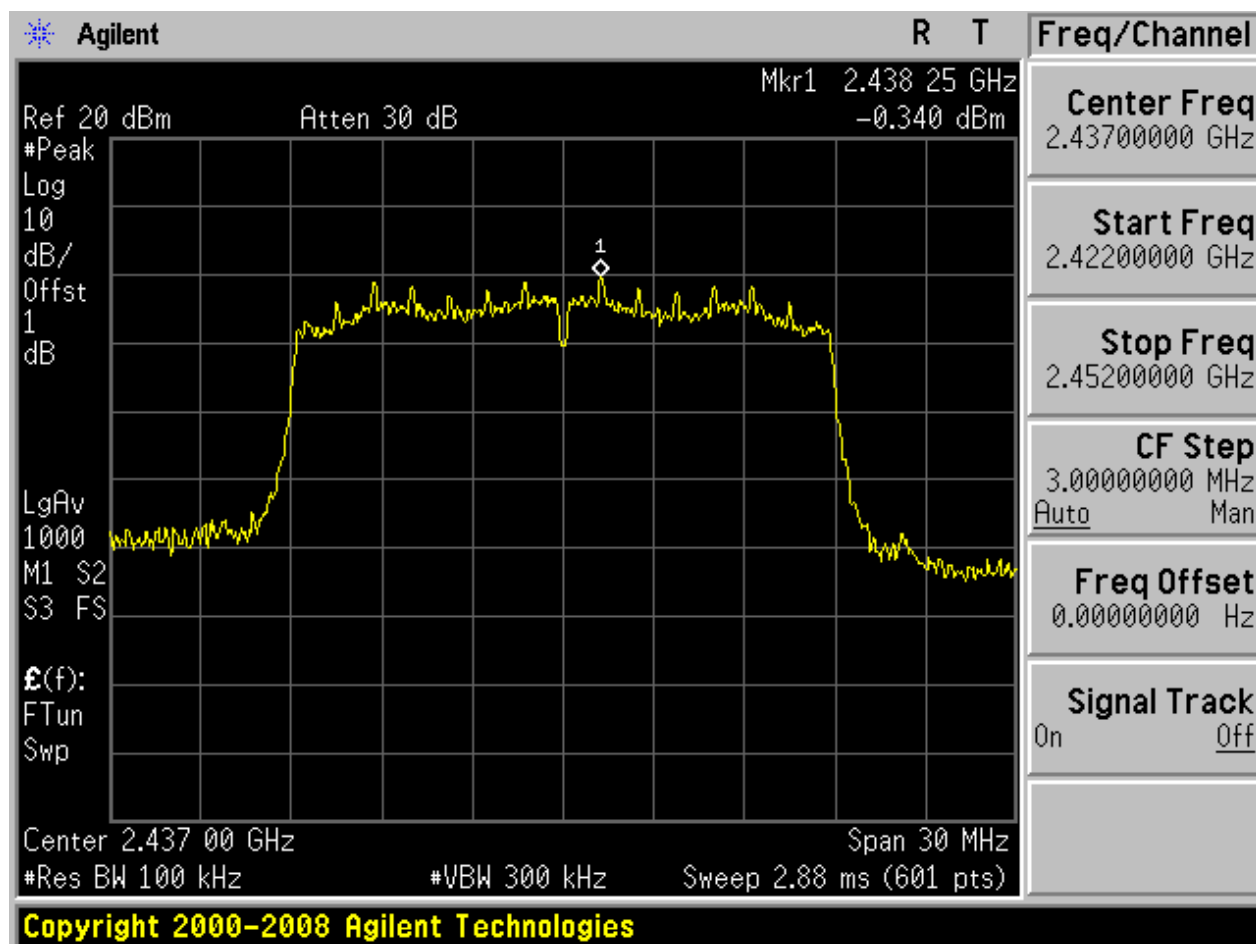






Puw:

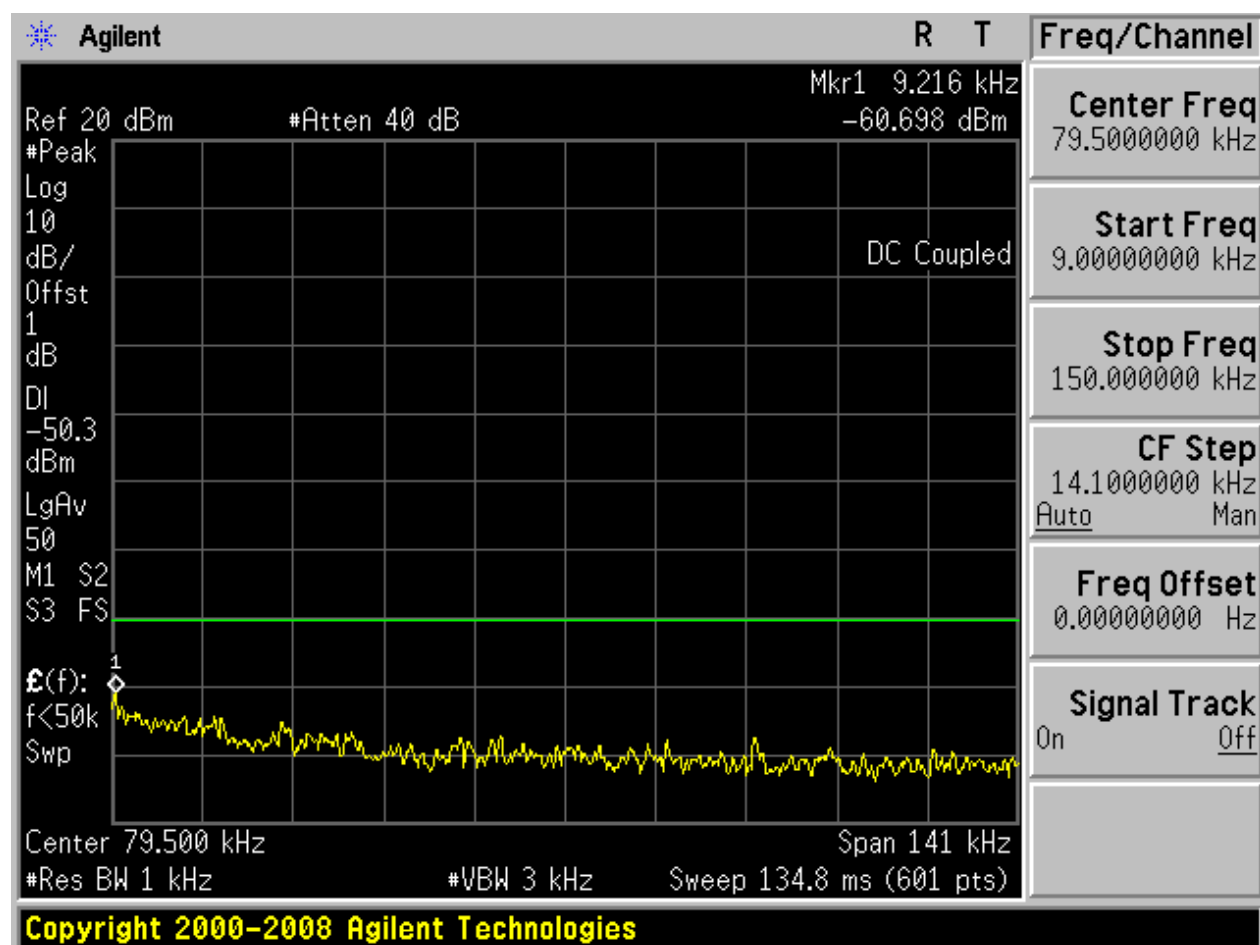


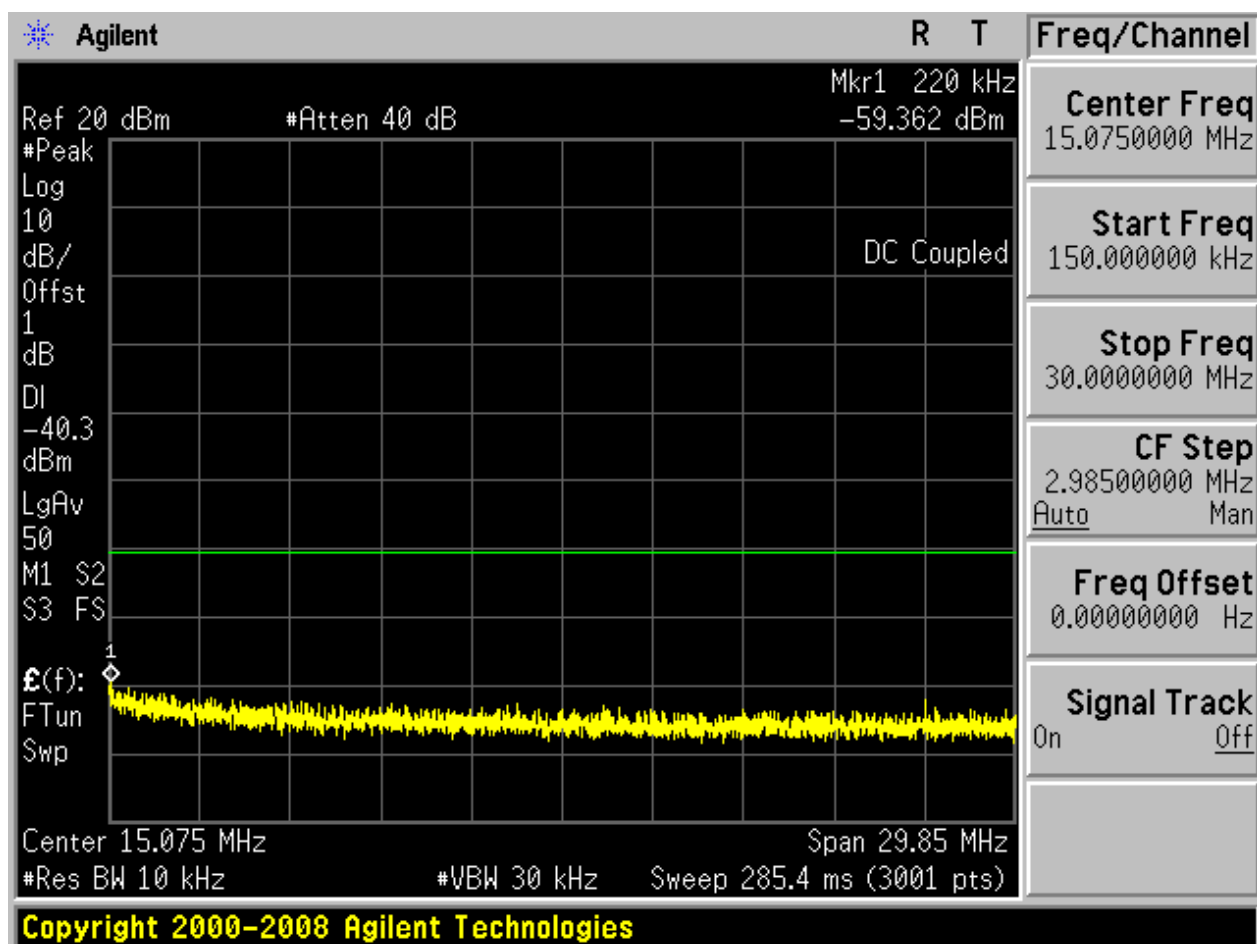

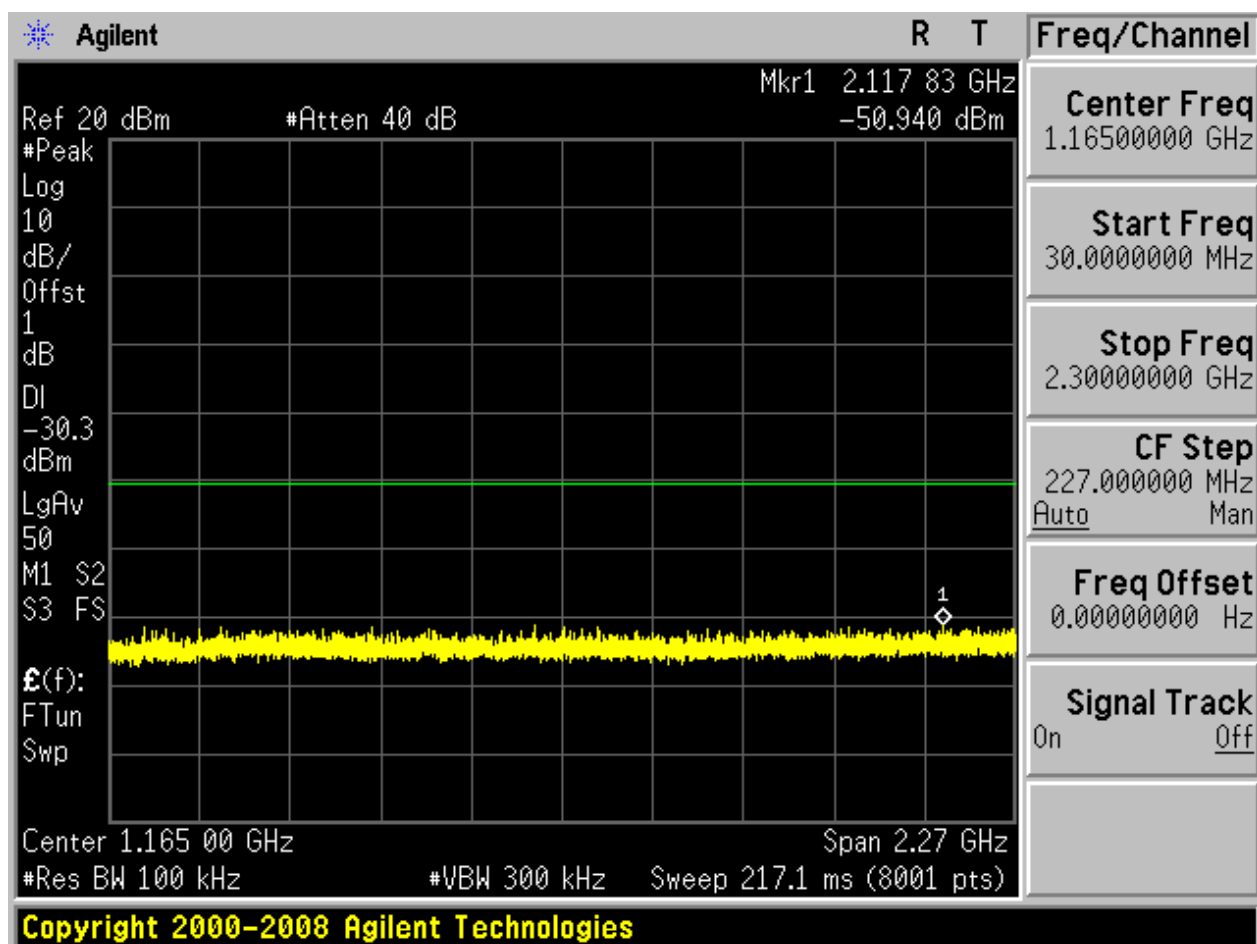

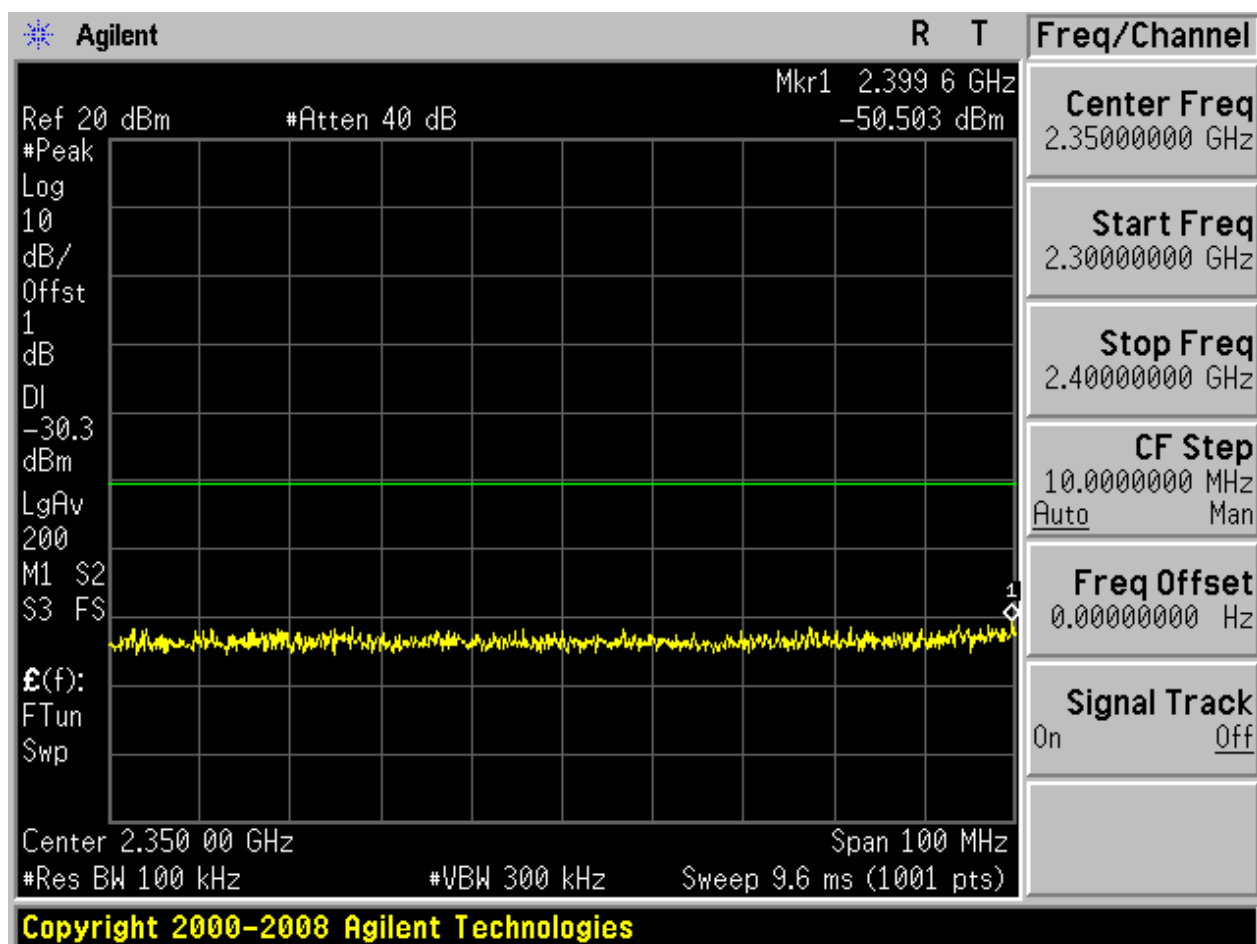

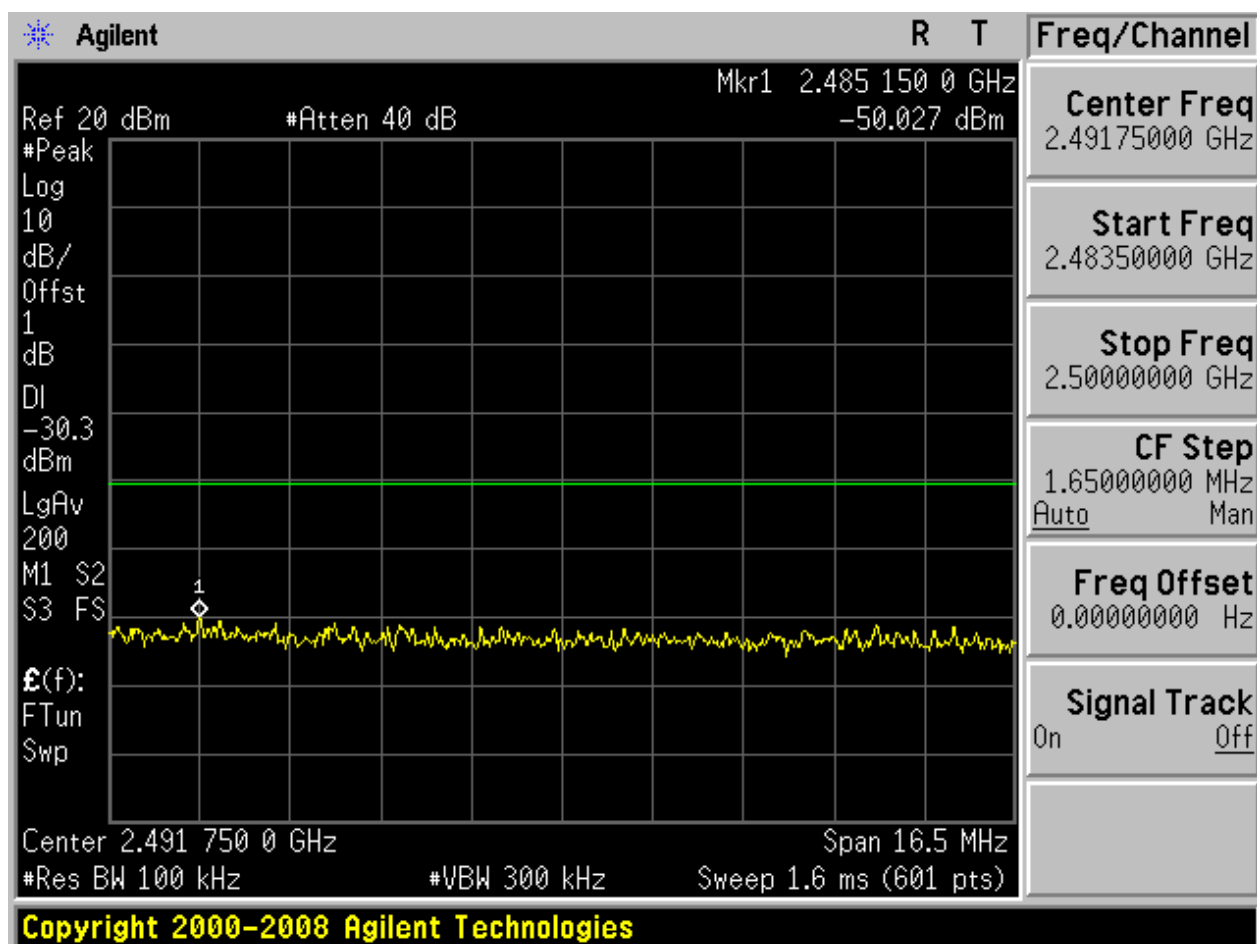


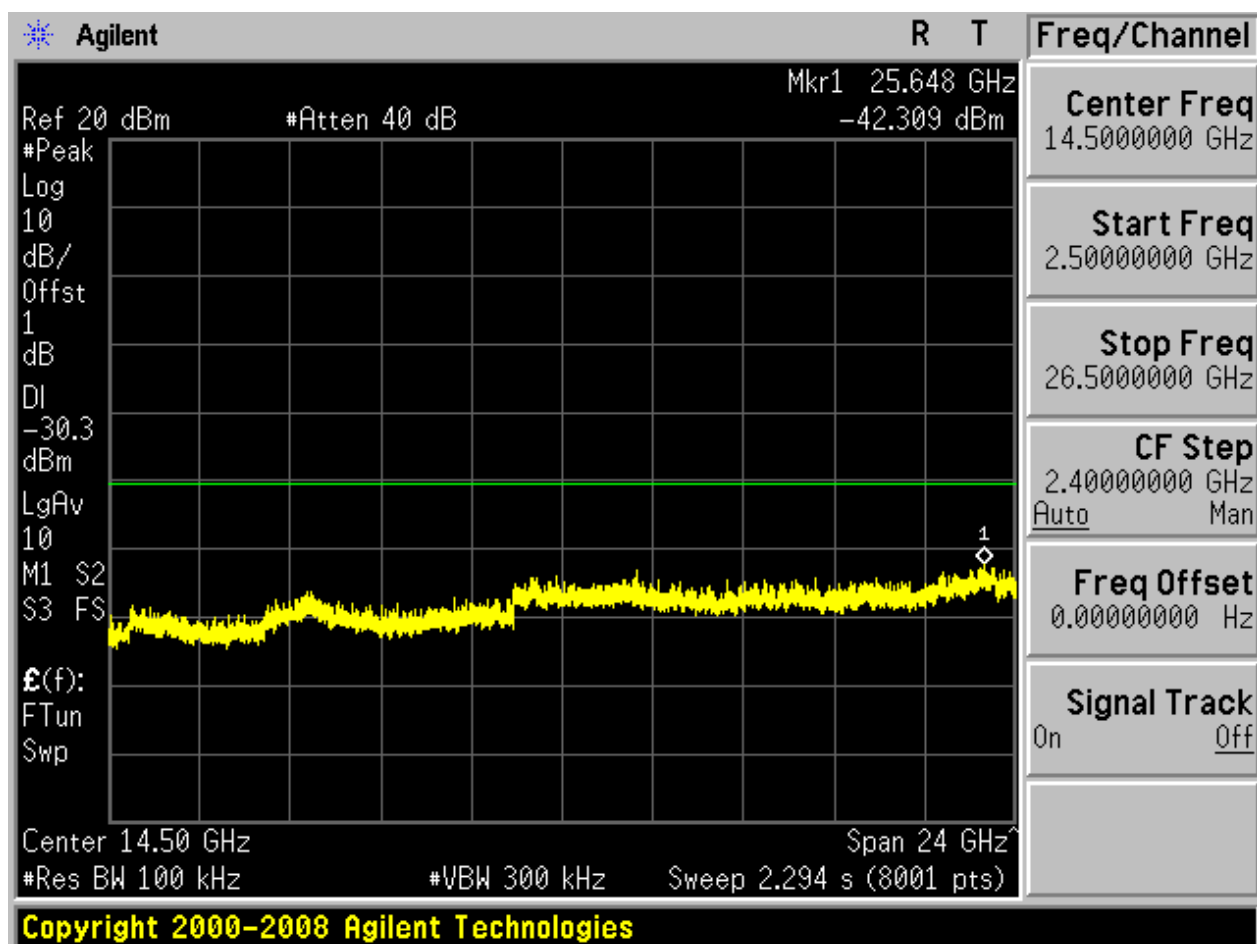




2.16 11N20m_M@Ant 2


Pref:

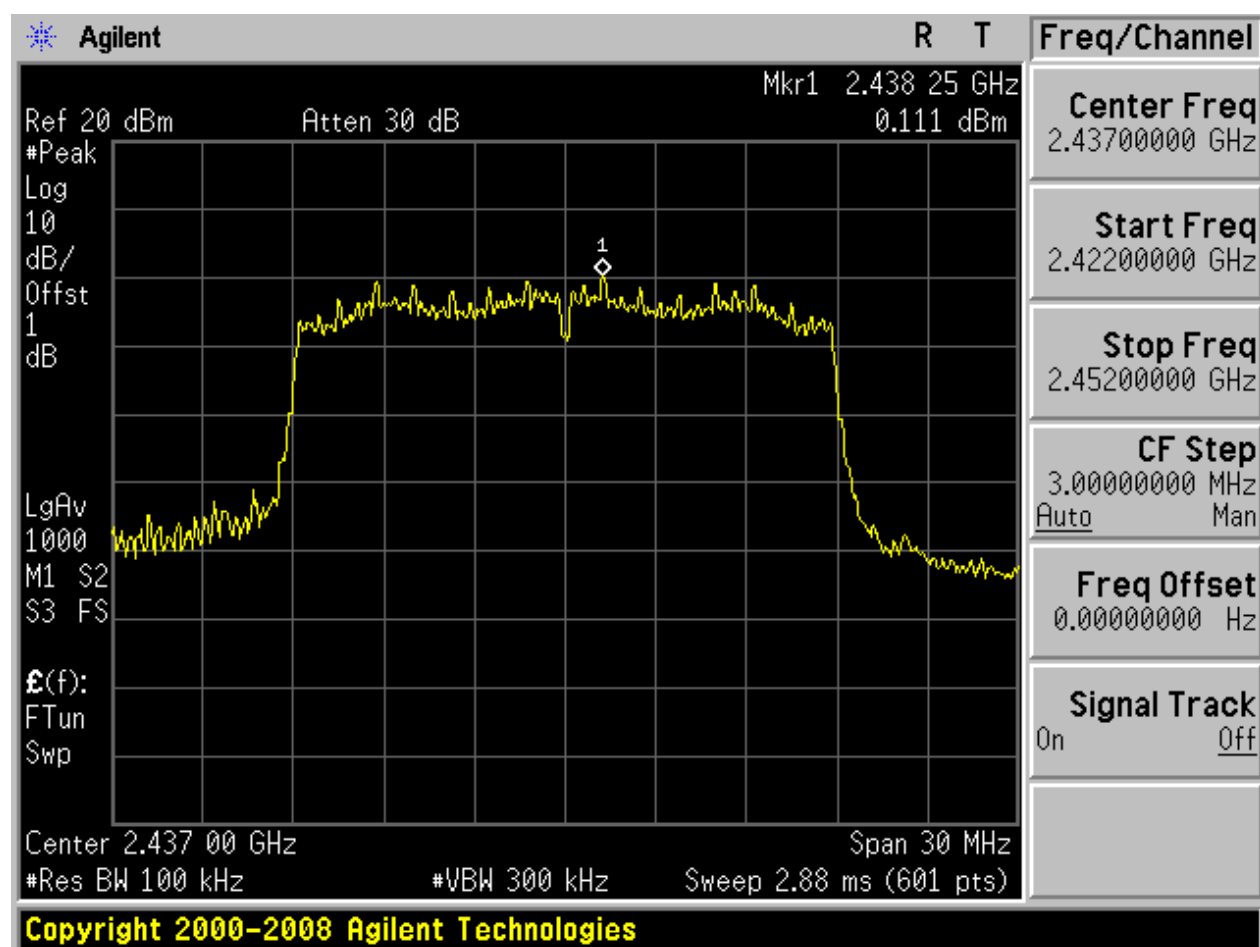






Puw:

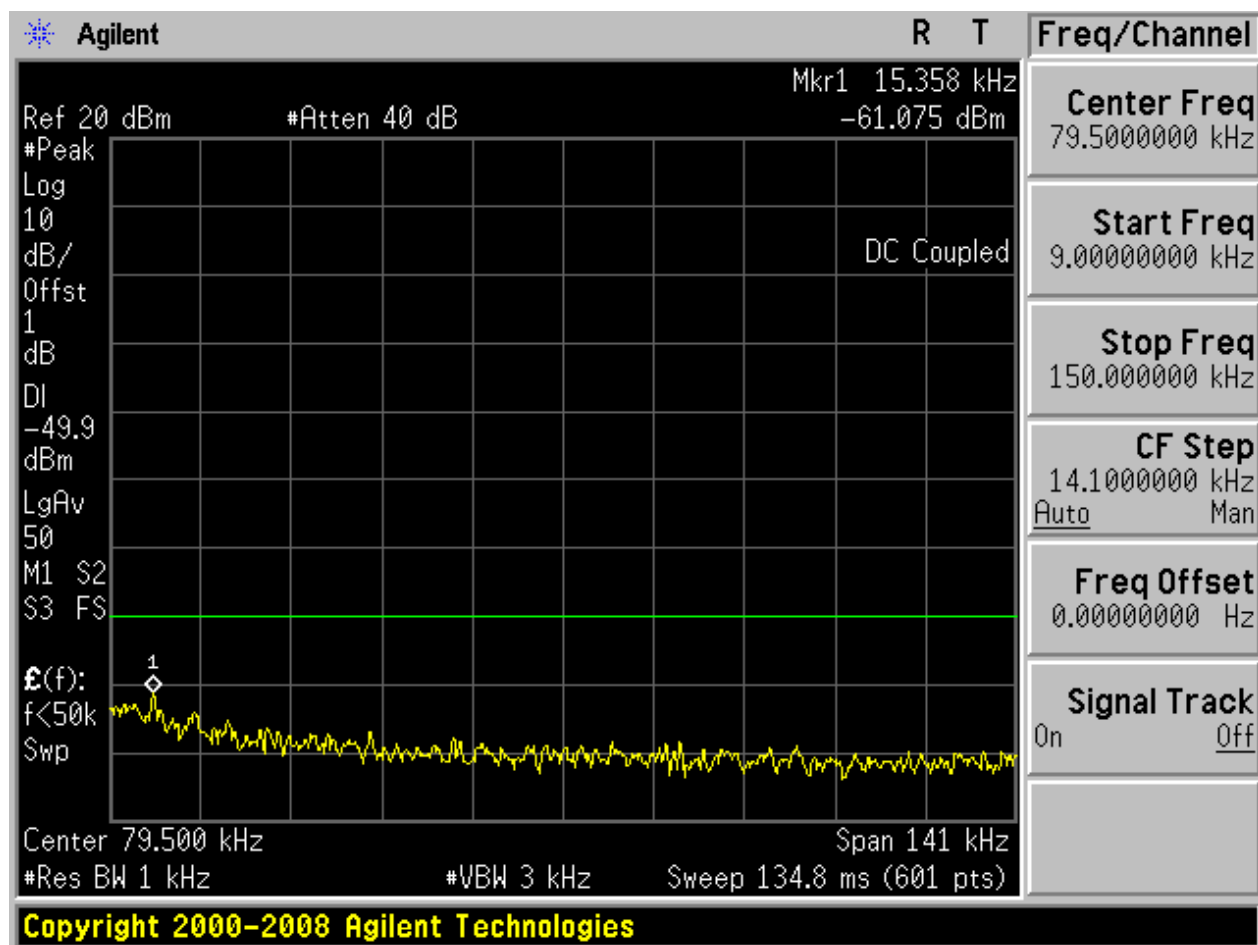


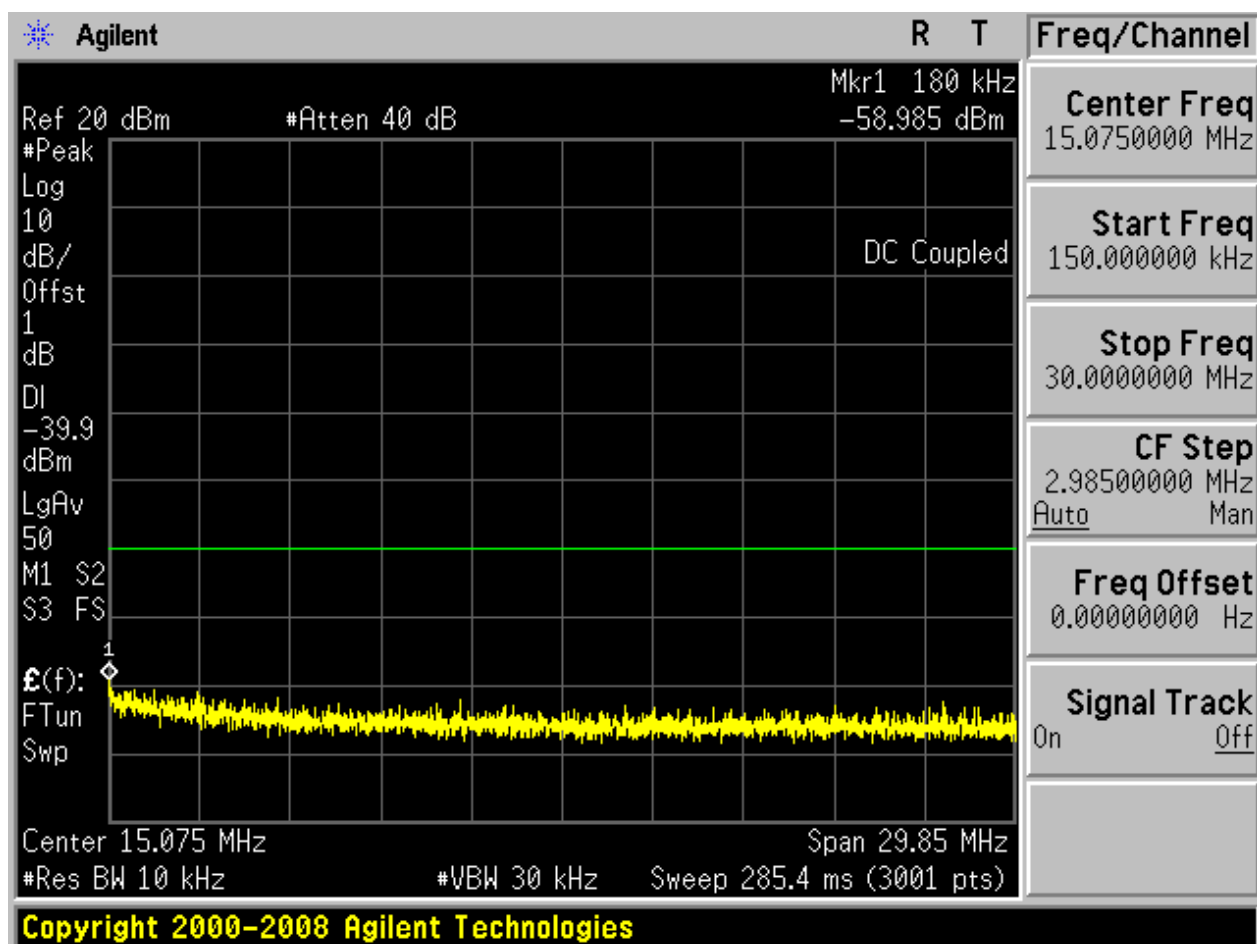

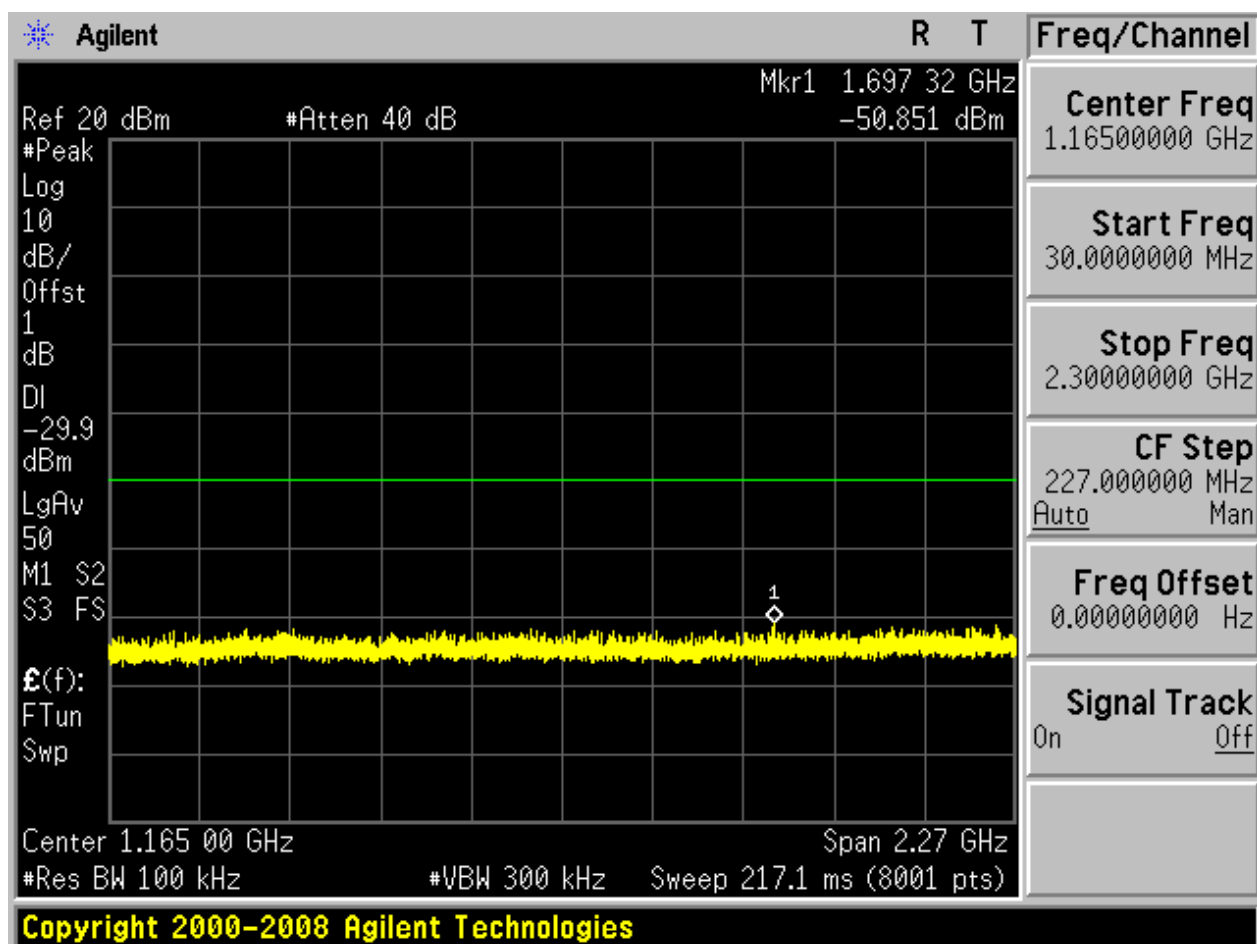

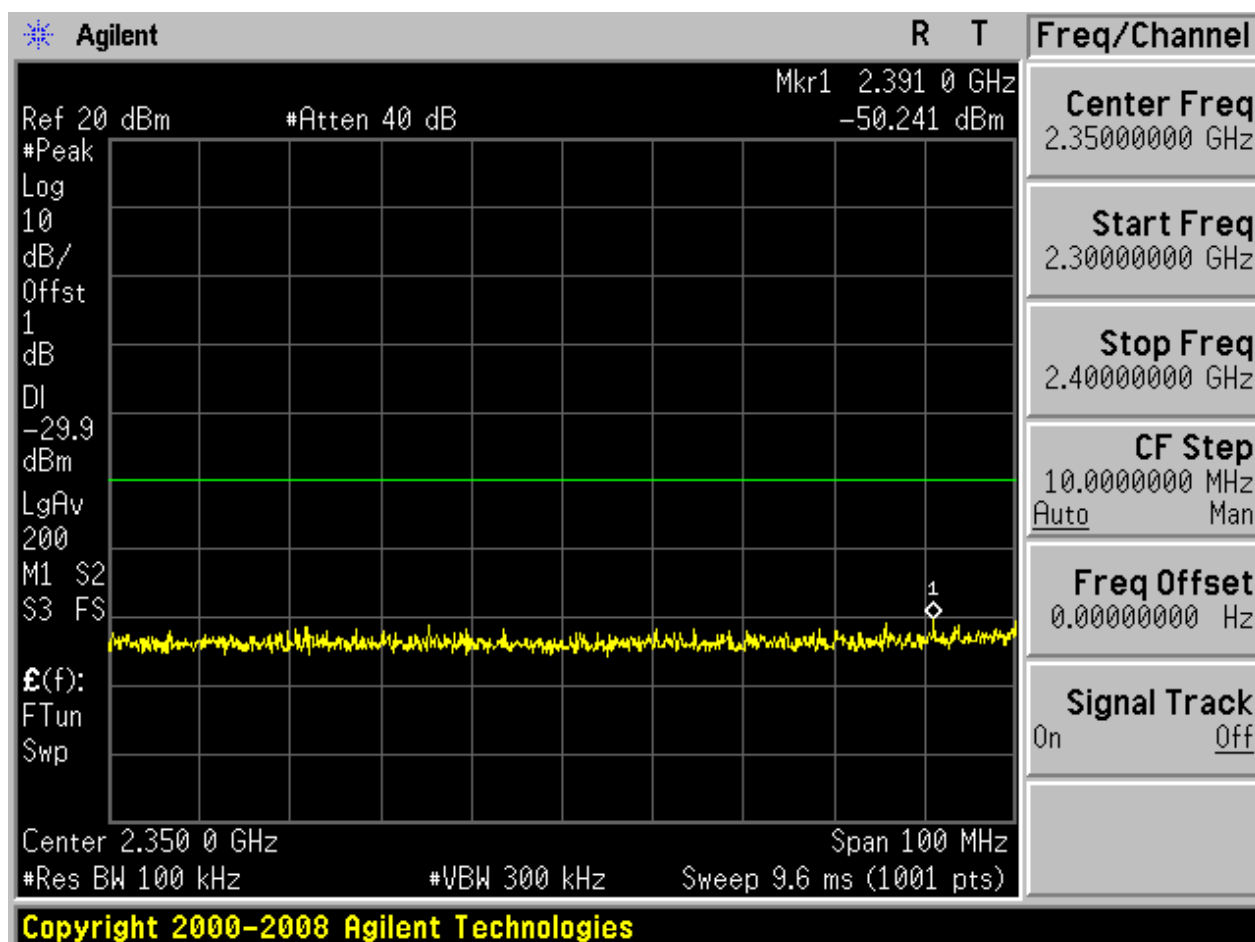


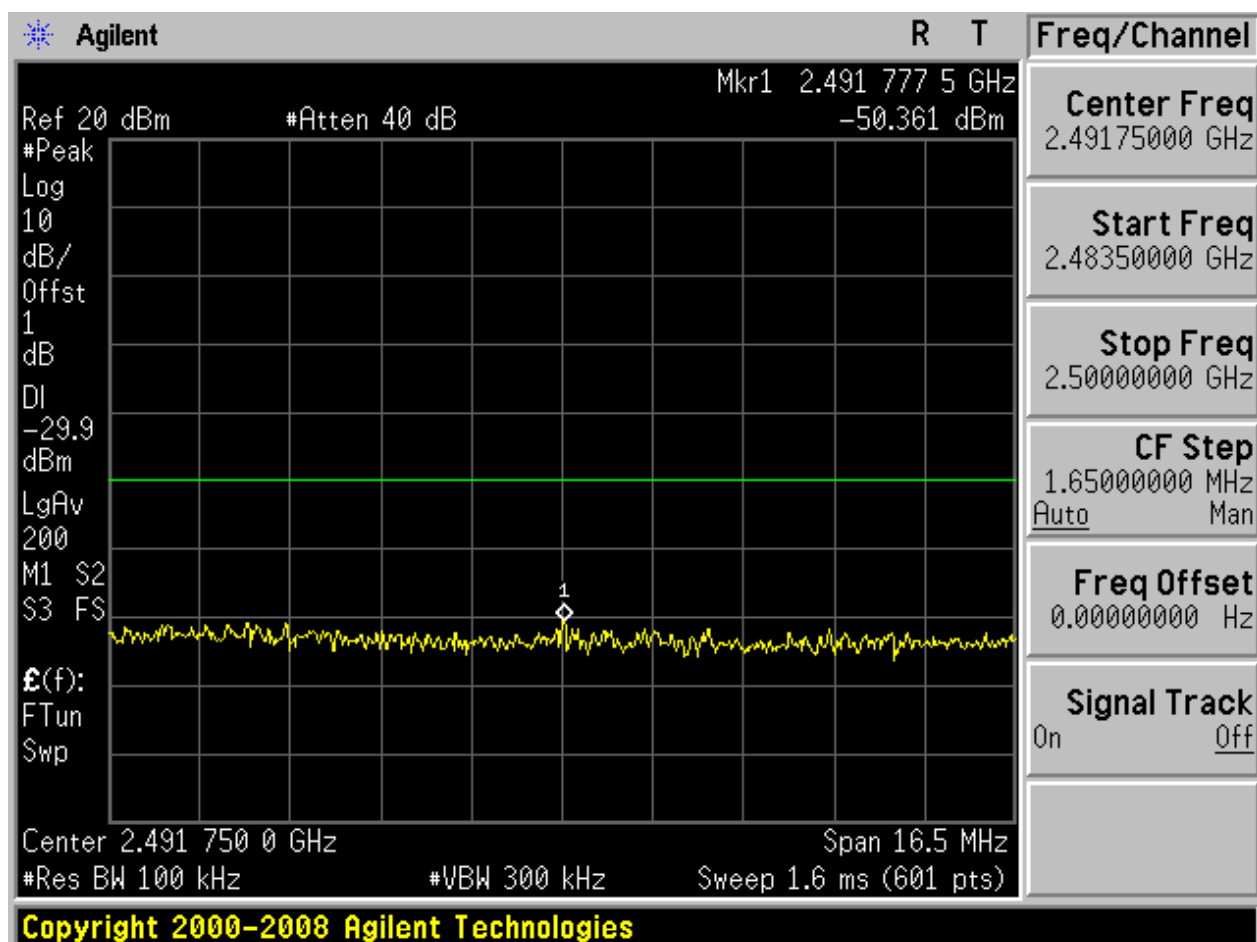

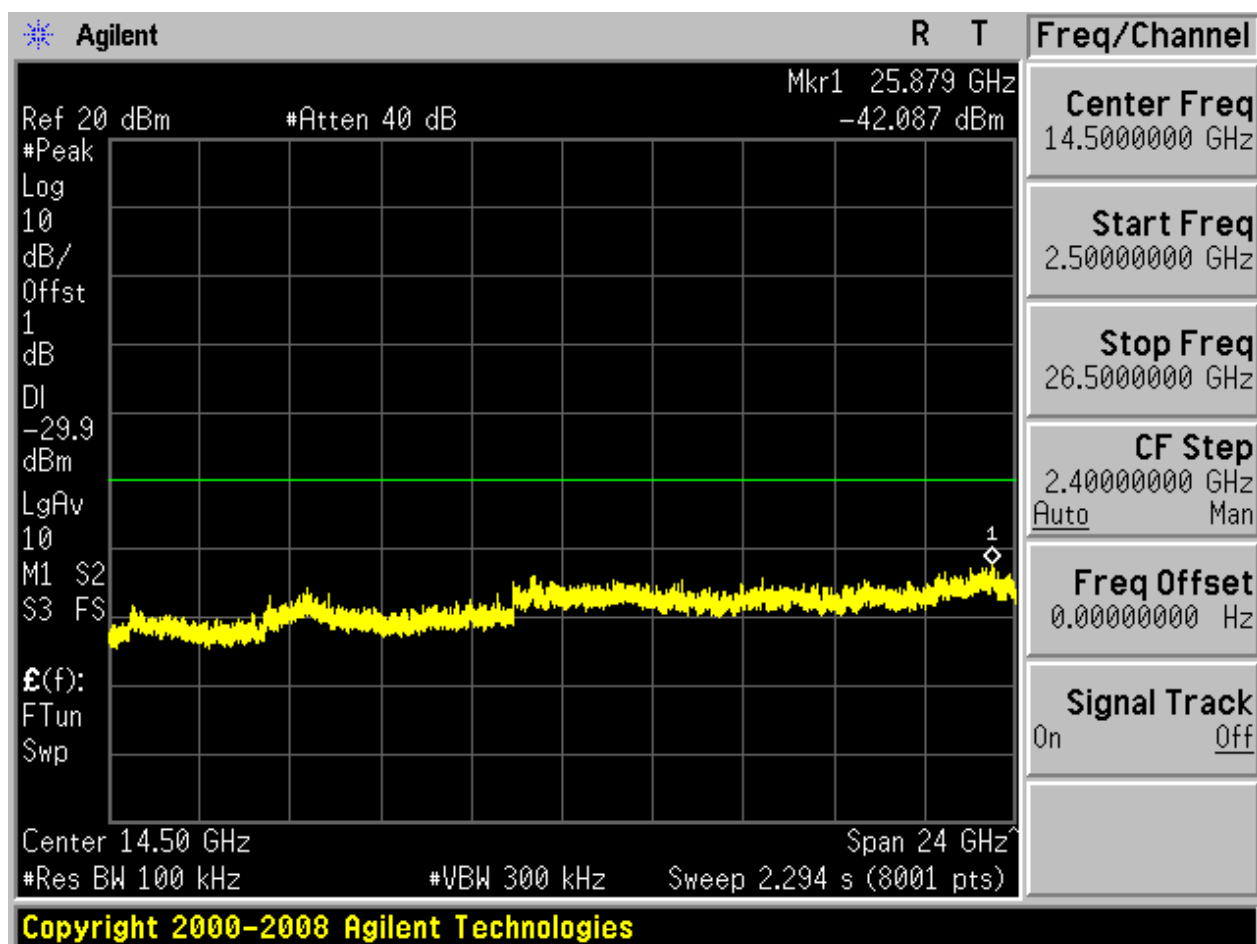


2.17 11N20m_H@Ant 1


Pref:

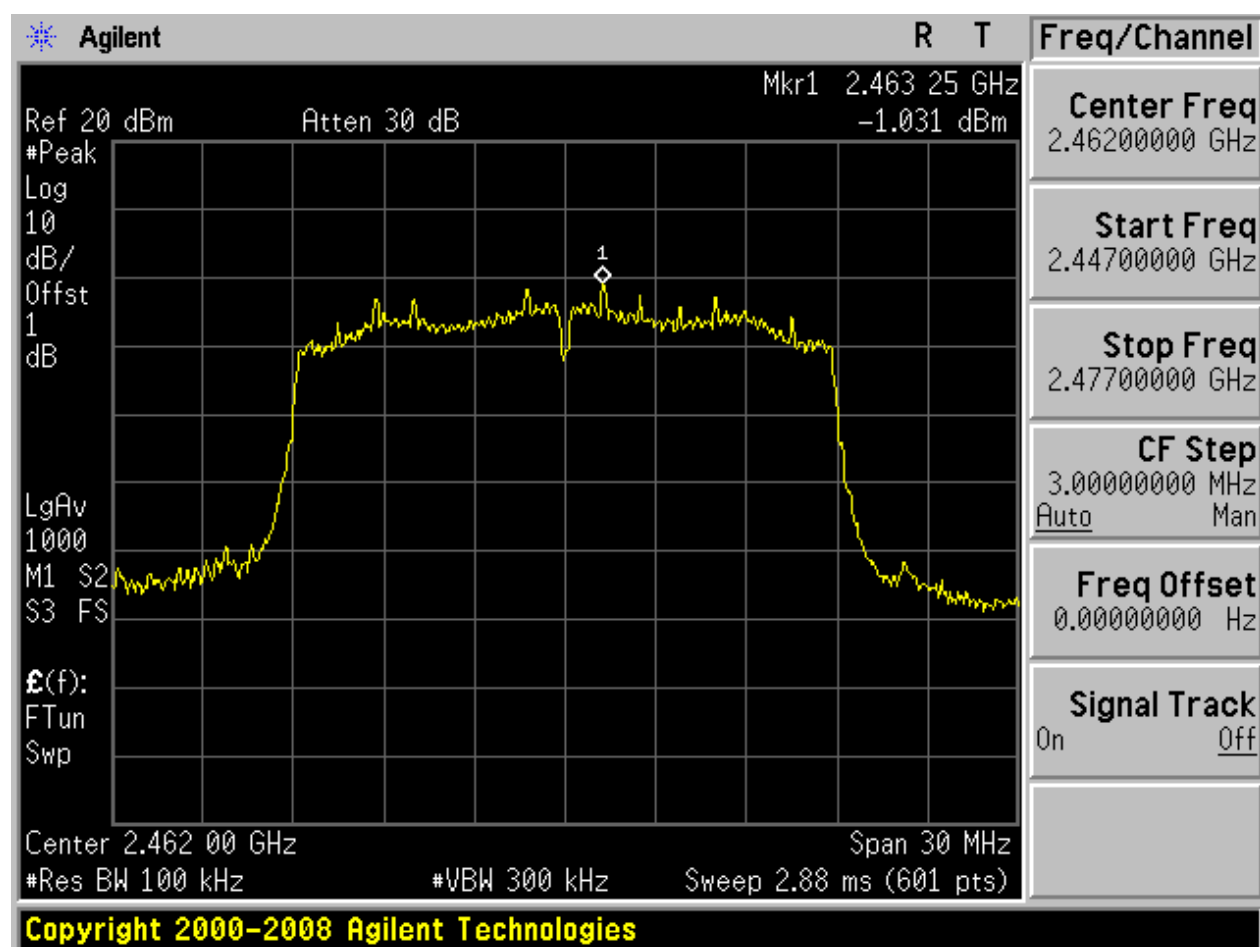






Puw:

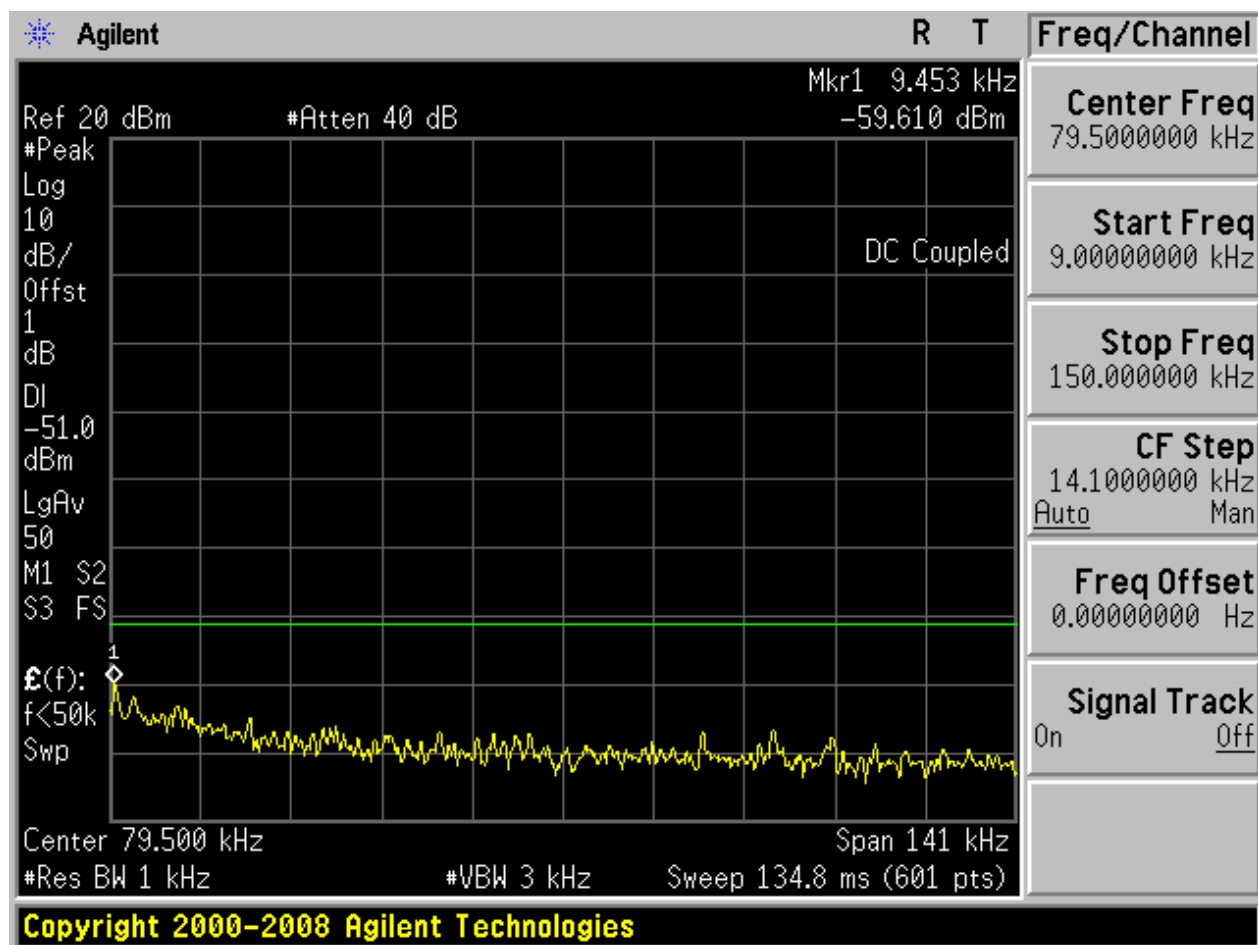


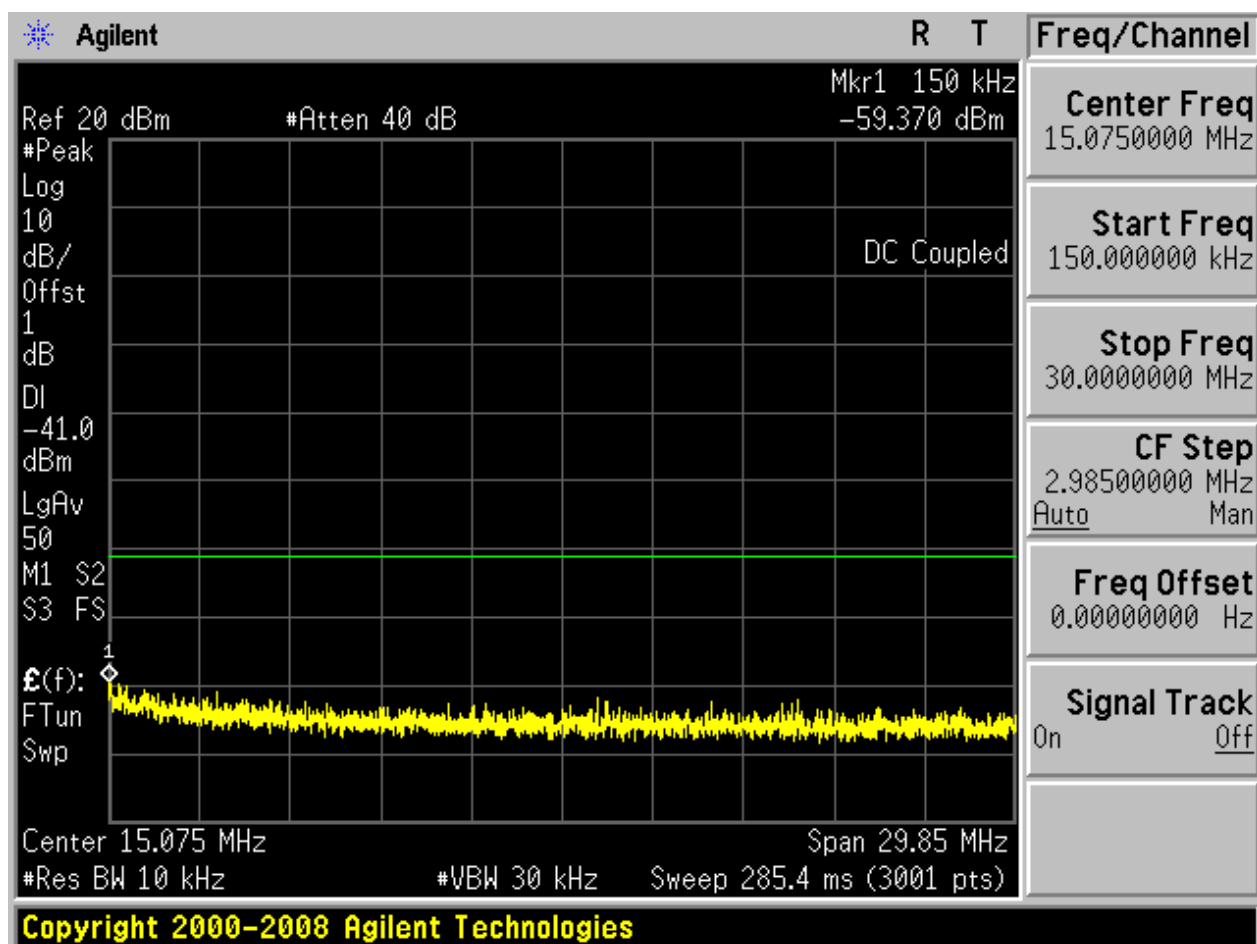

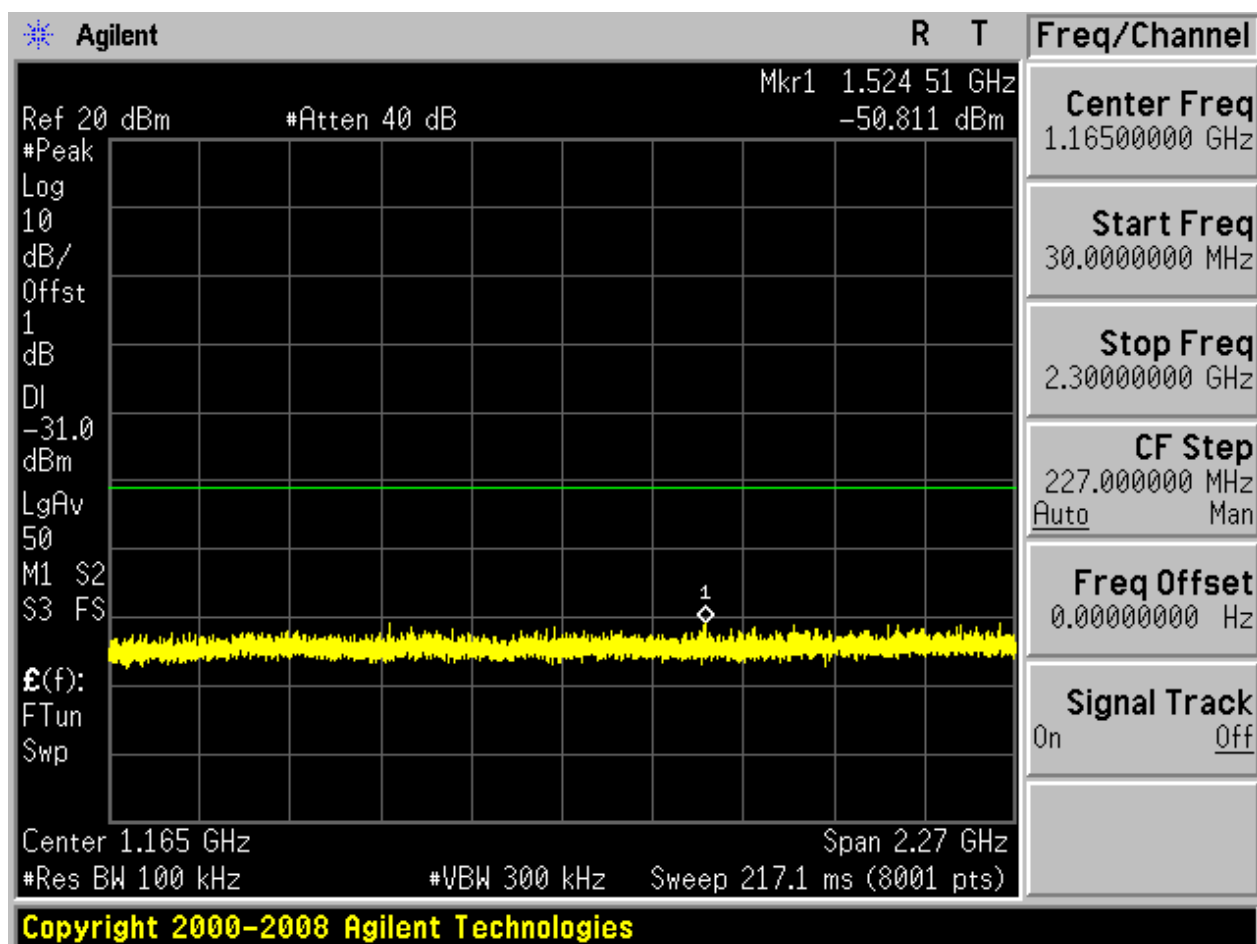

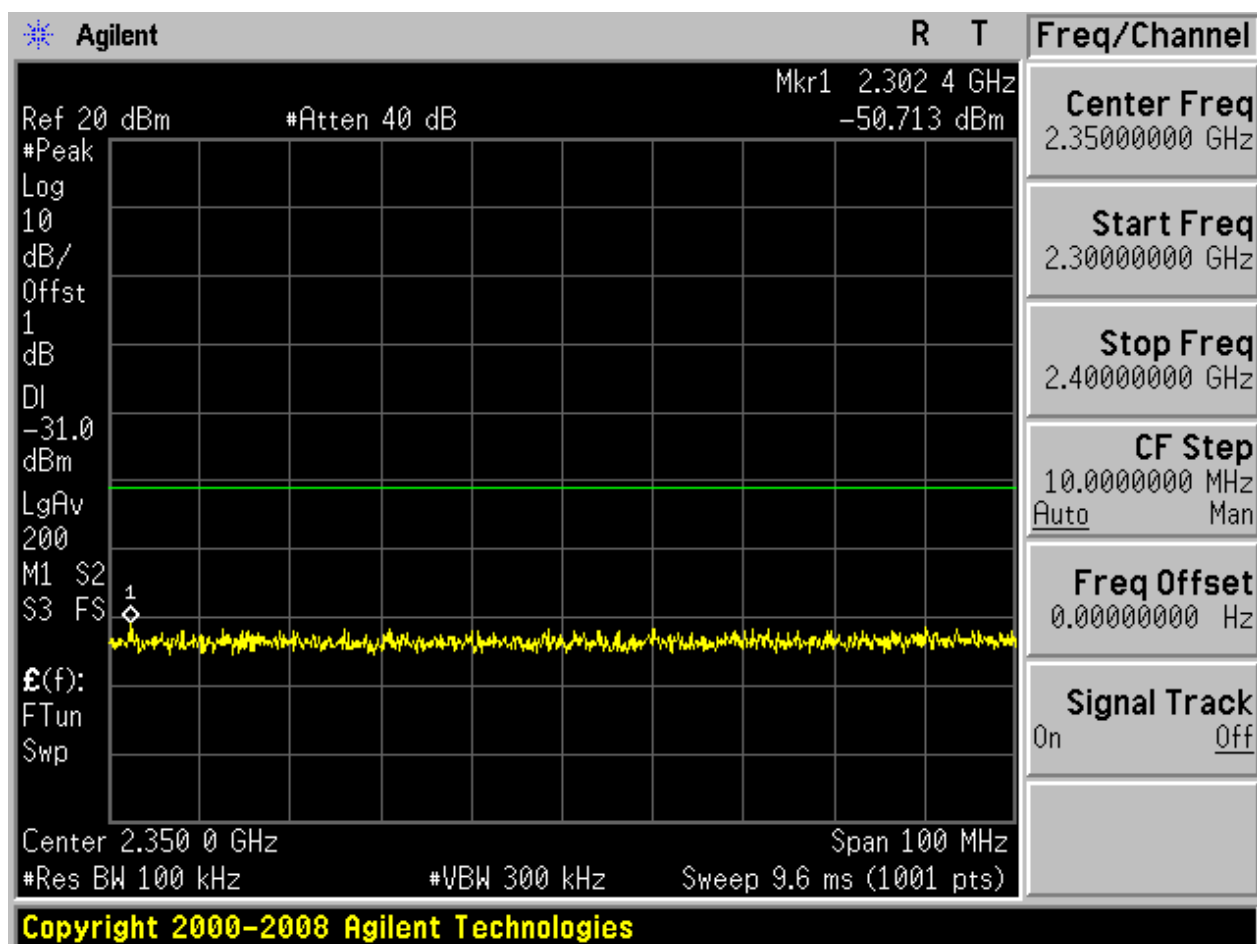


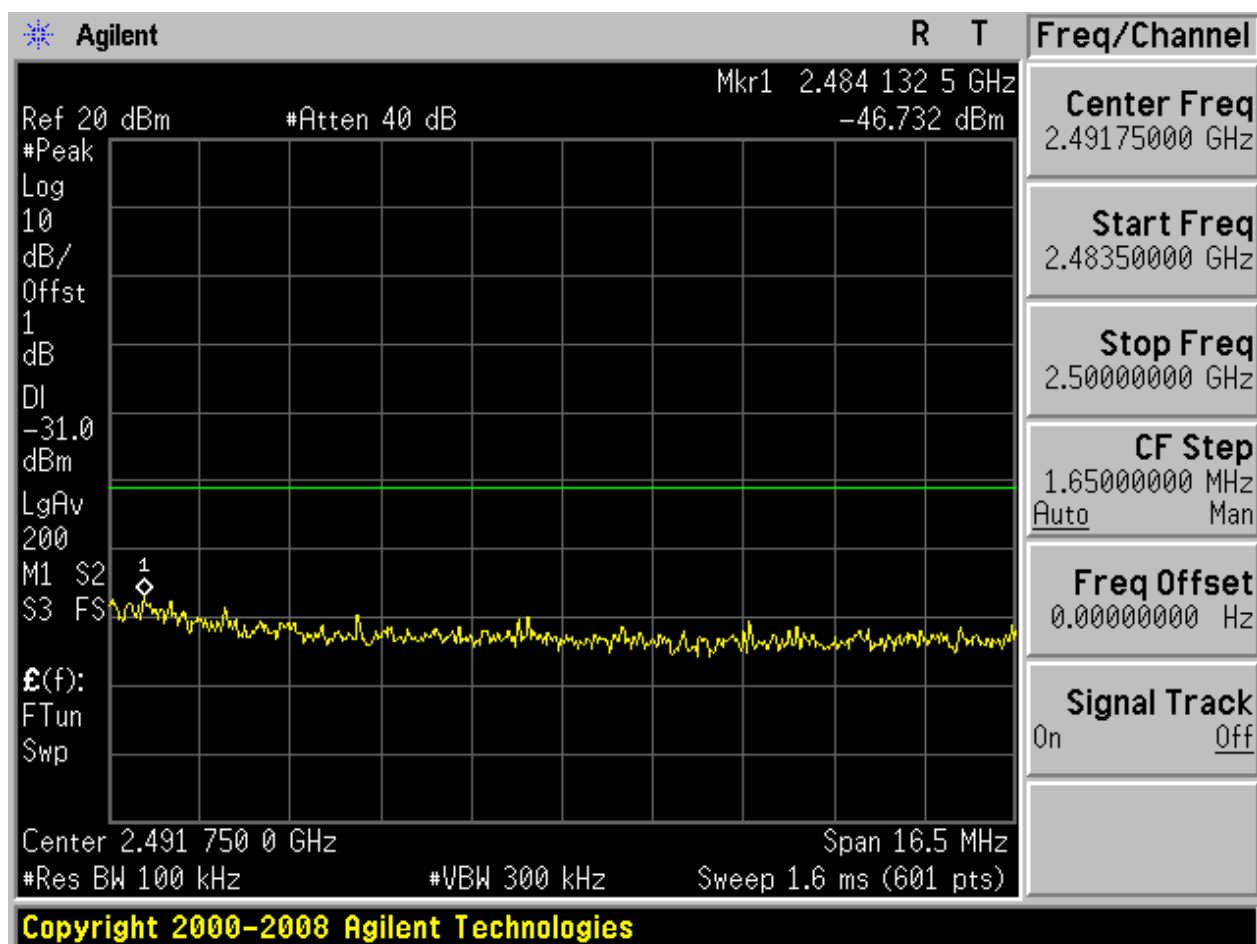

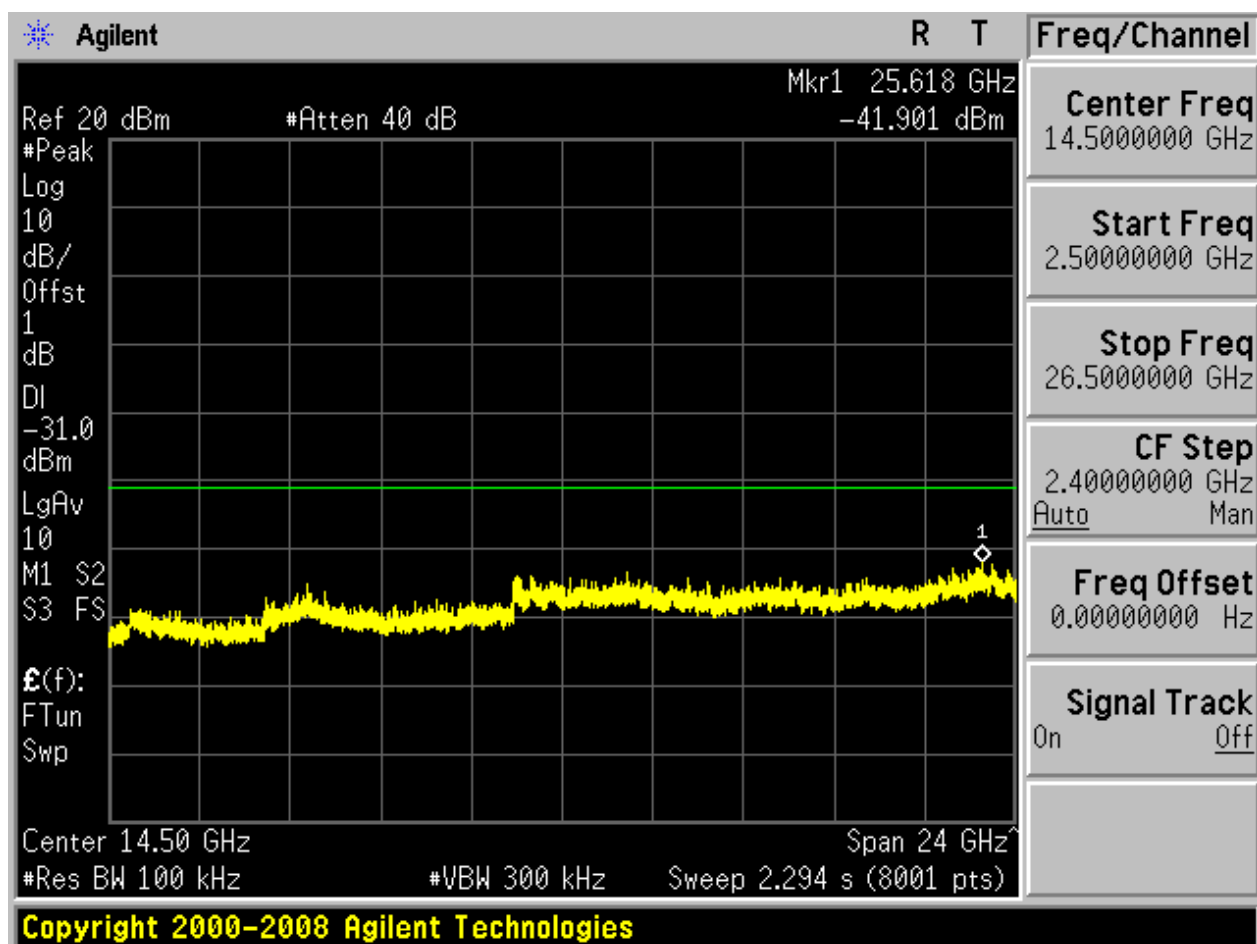



2.18 11N20m_H@Ant 2


Pref:

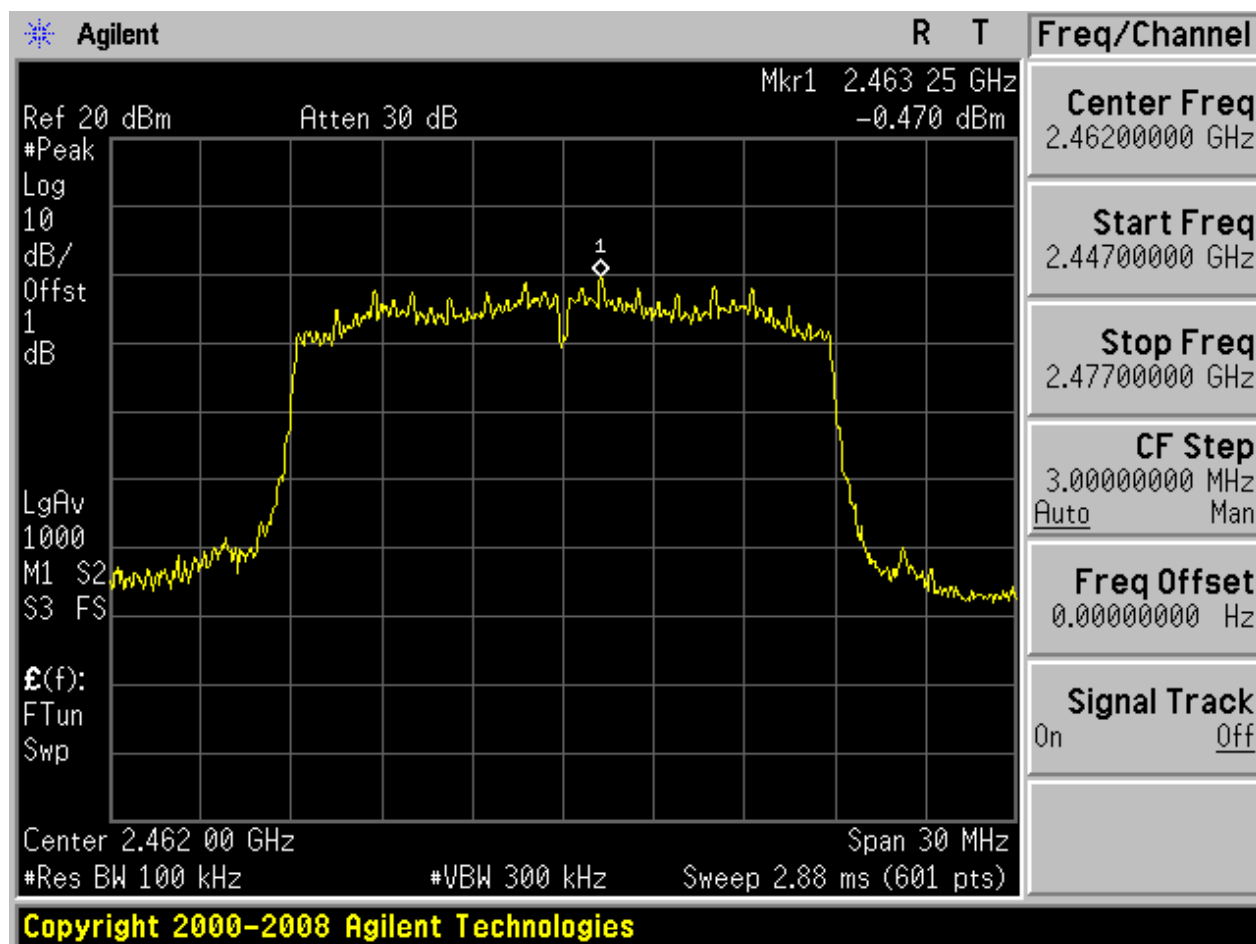



Puw:

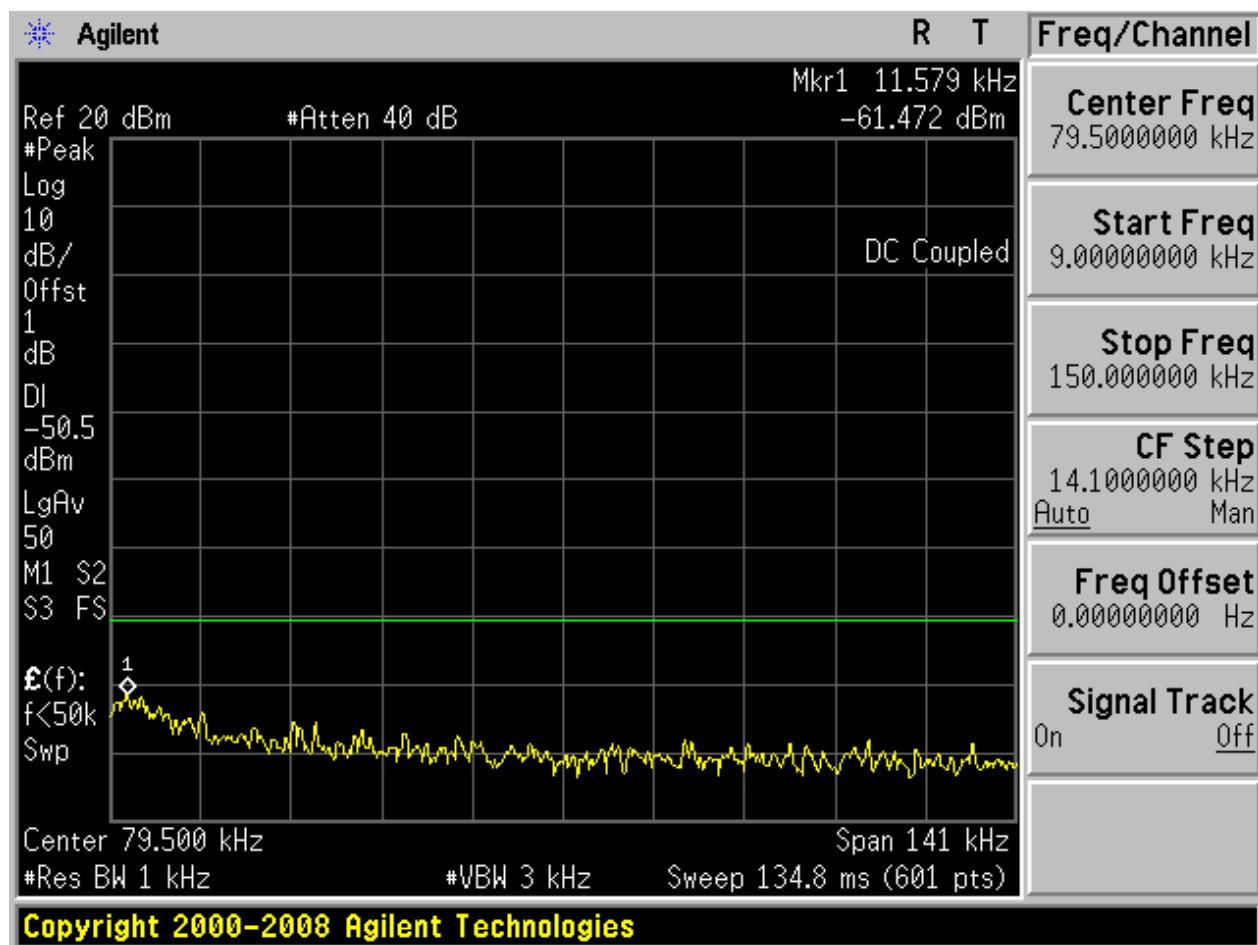


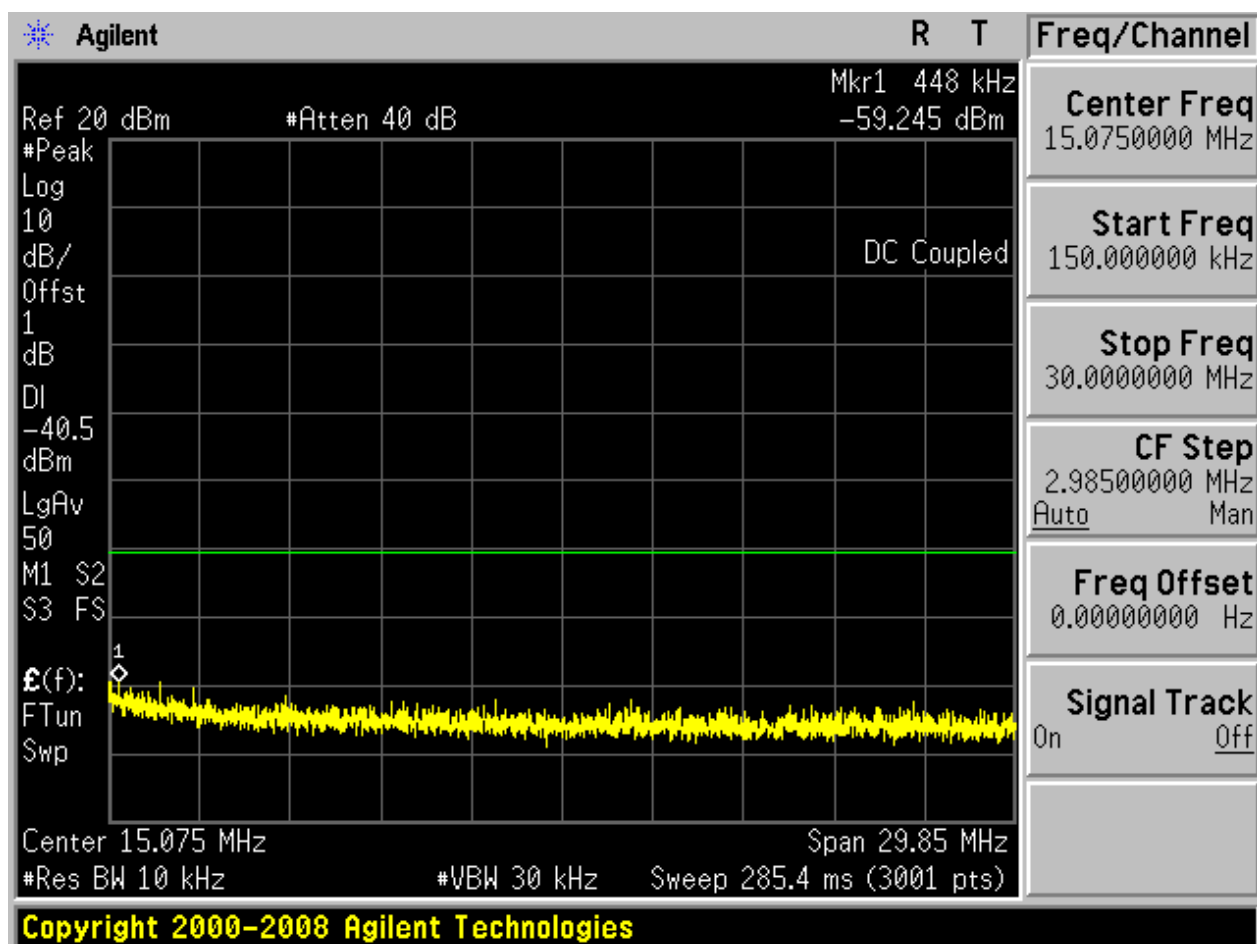

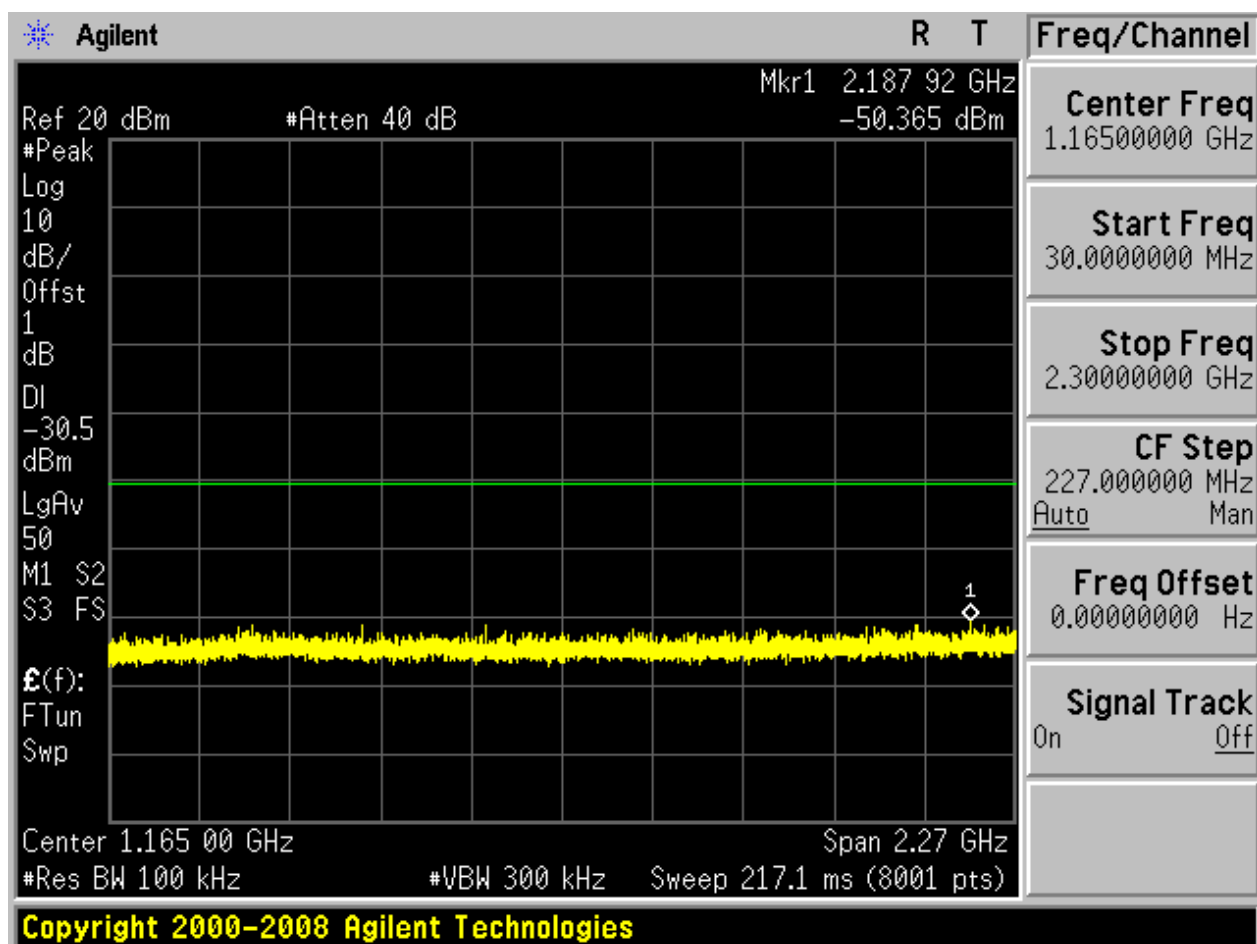

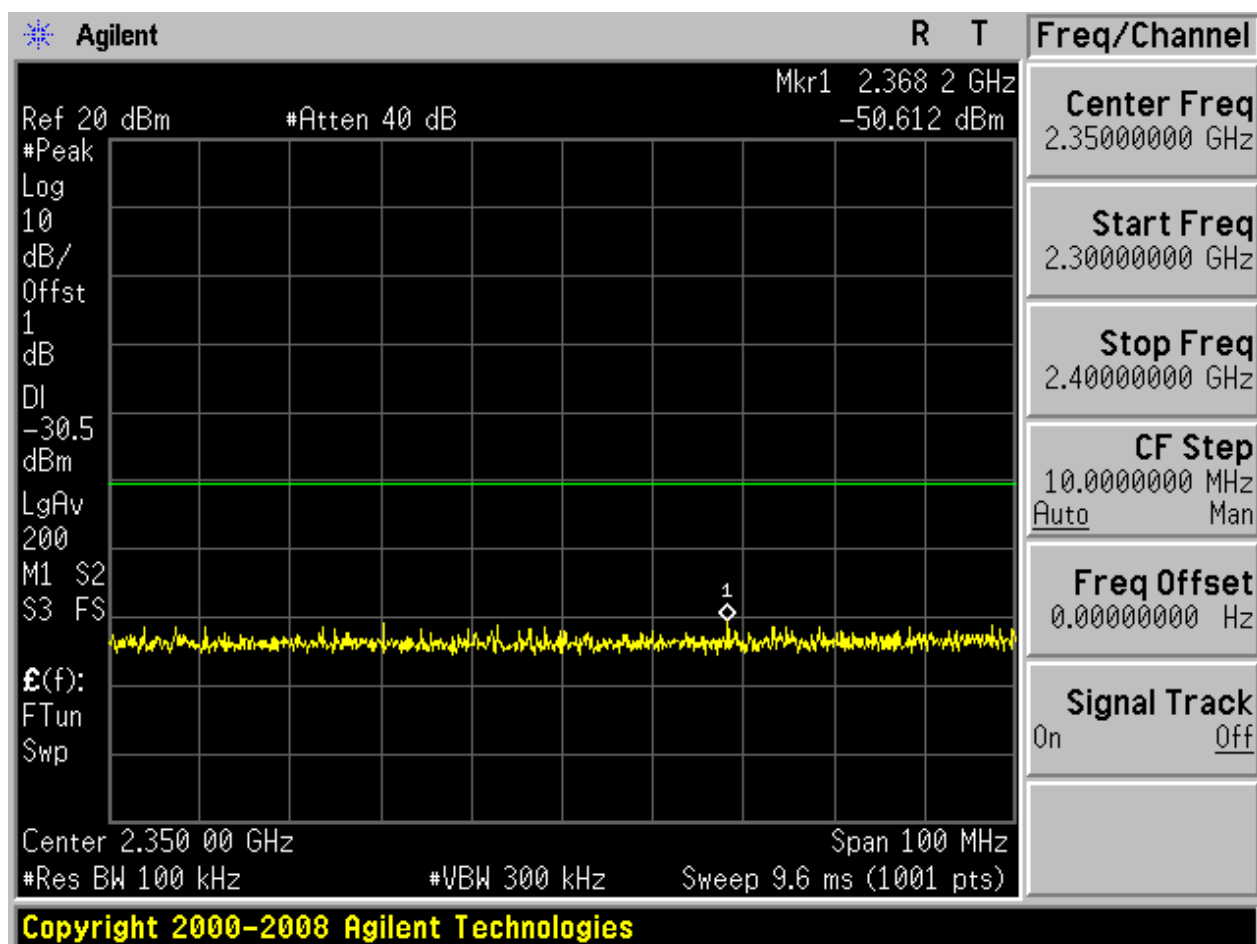


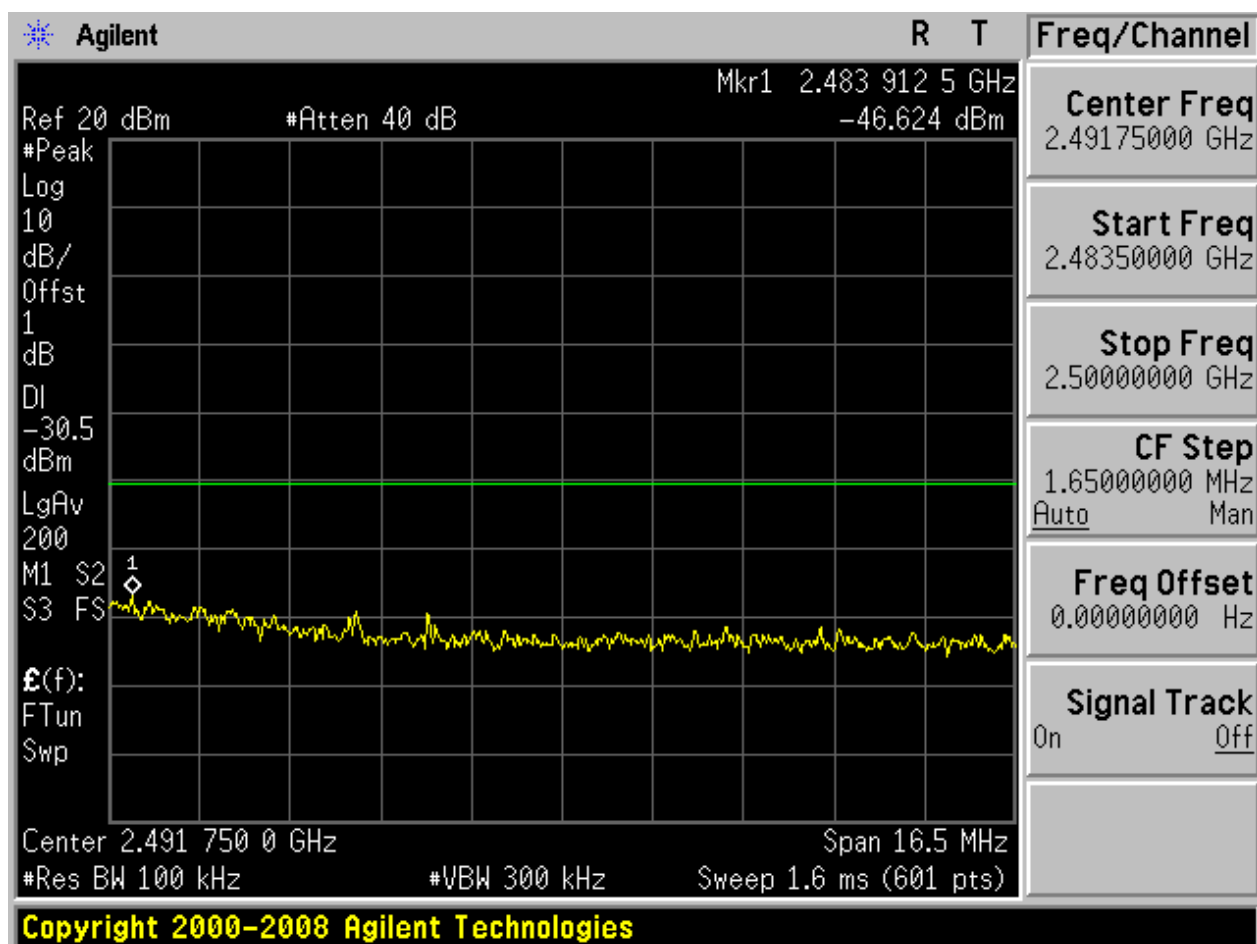

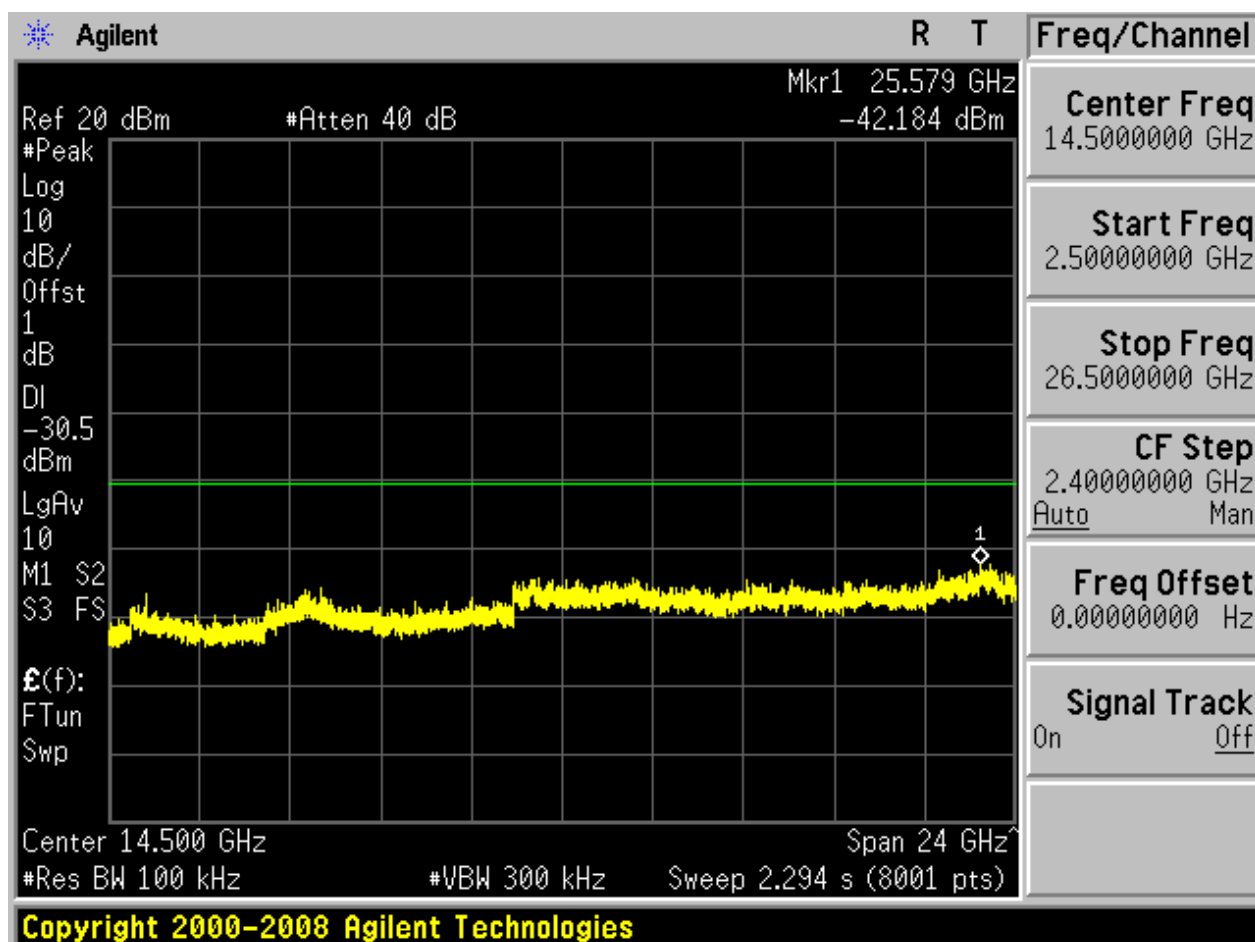


2.19 11N40_L@Ant 1


Pref:

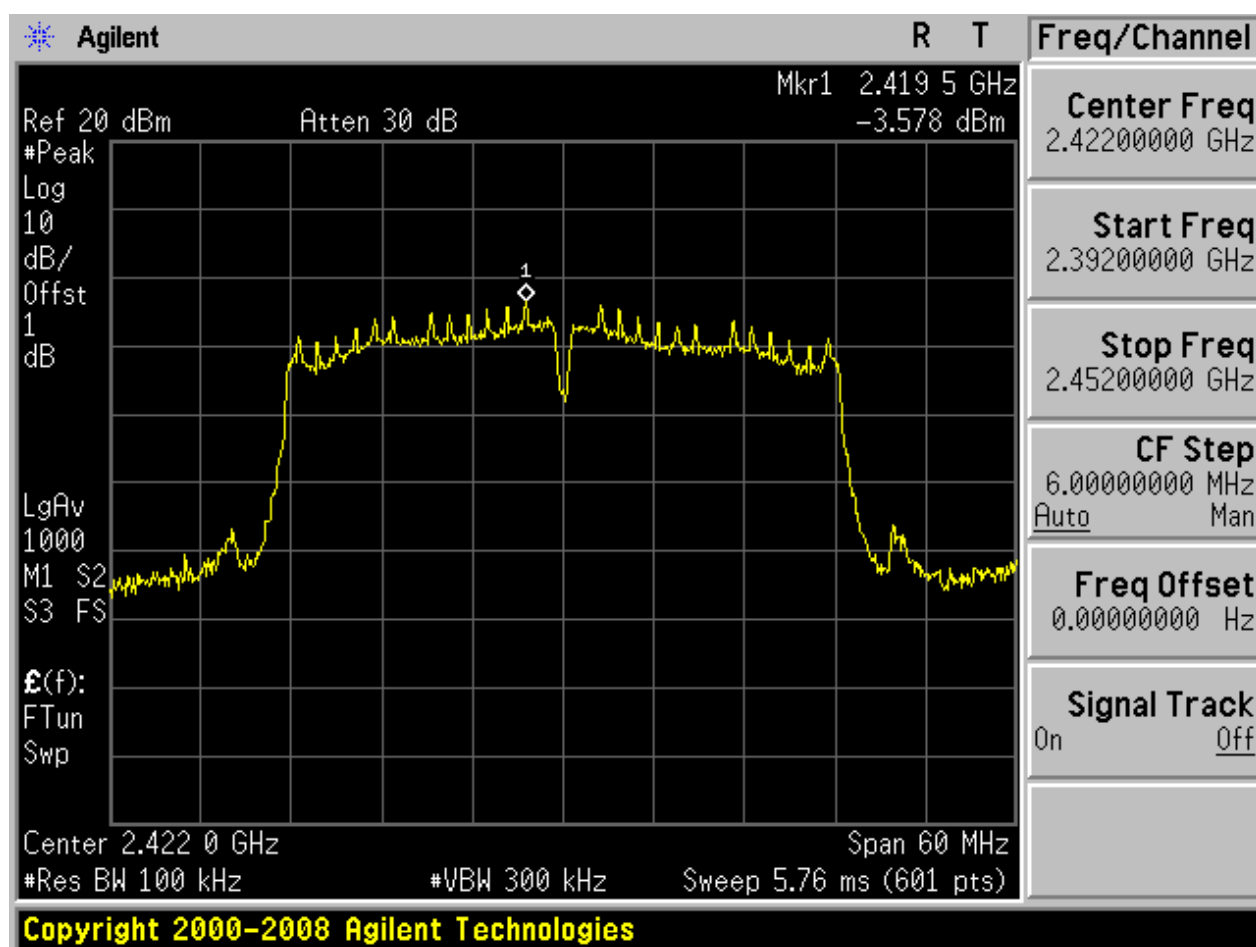






Puw:

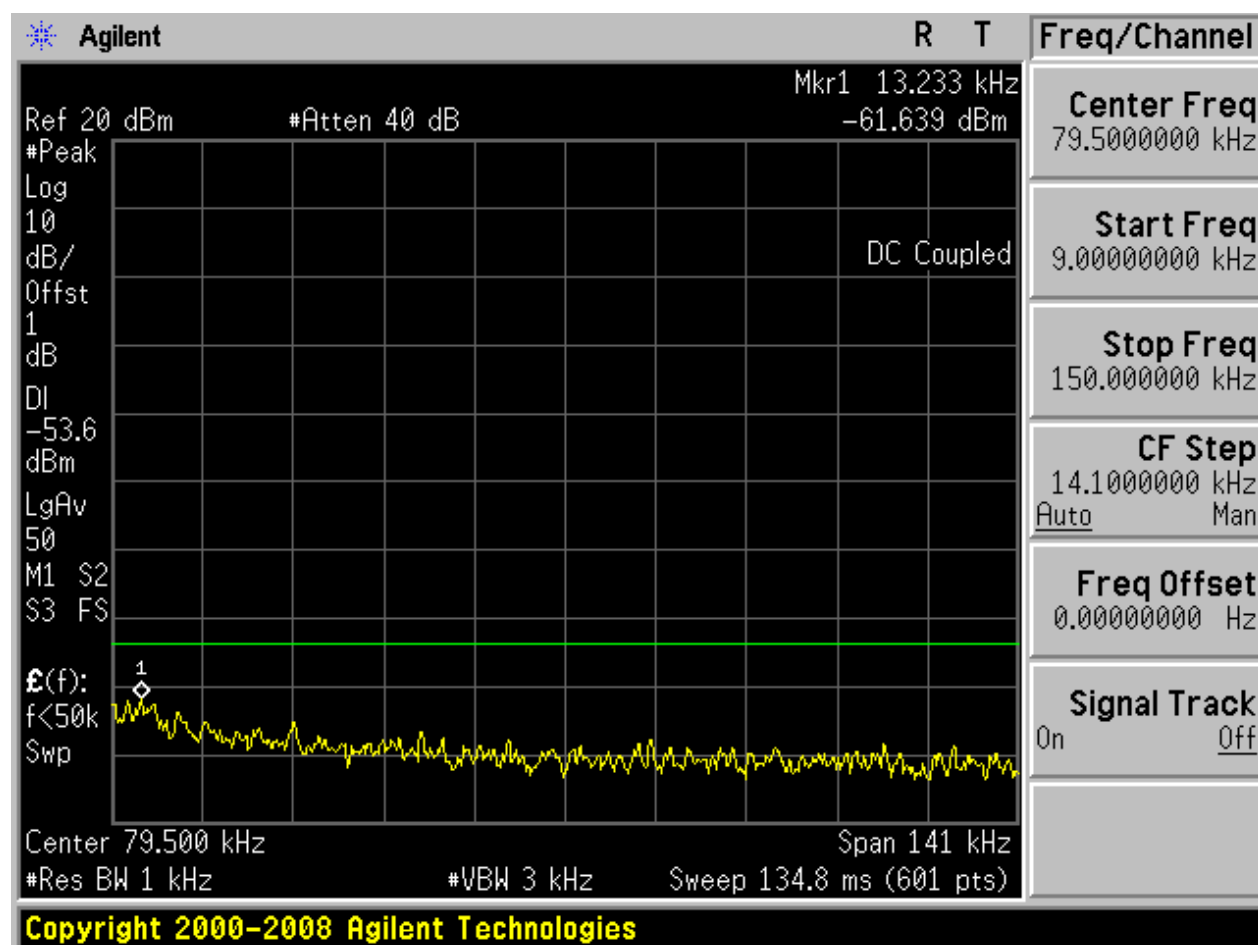


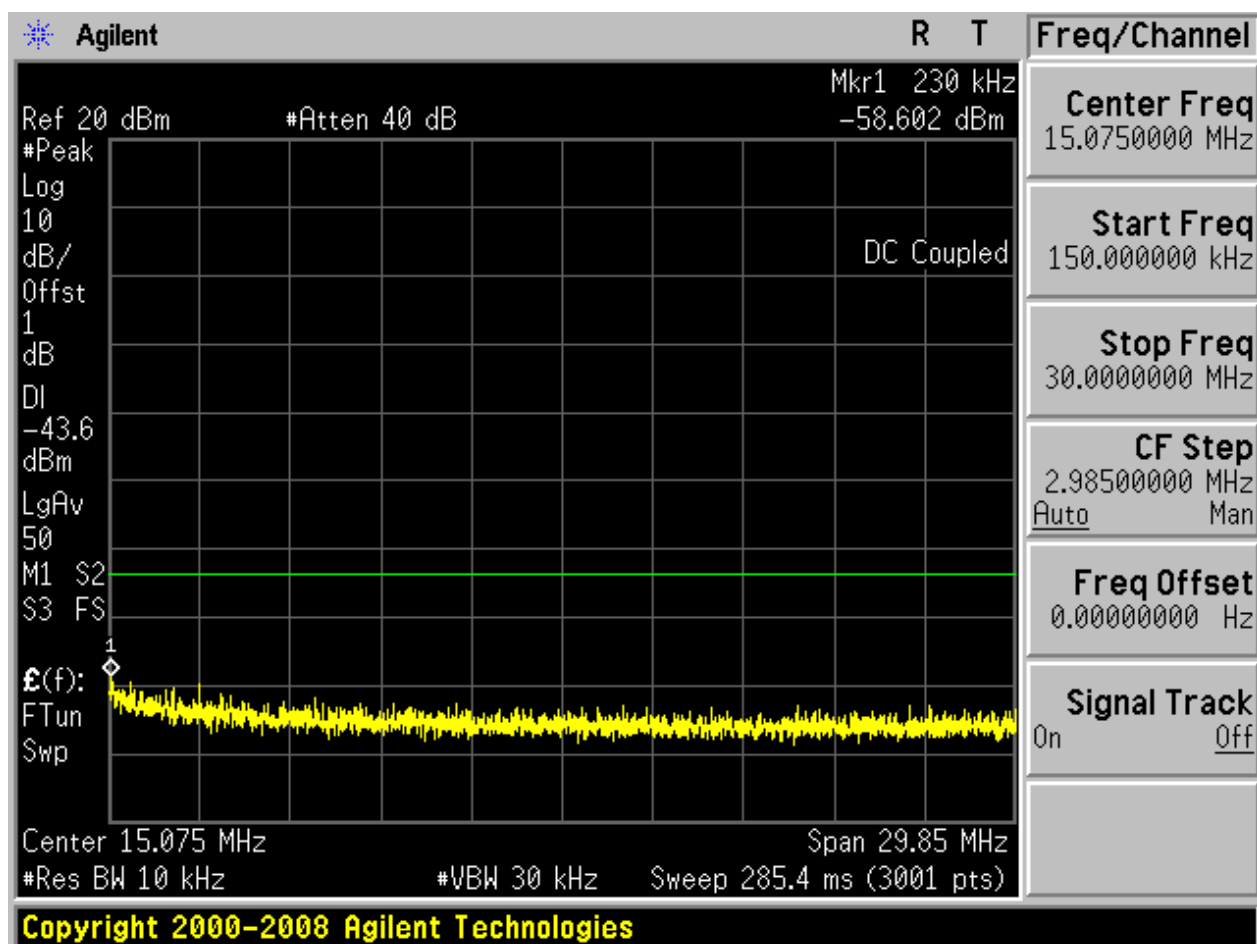

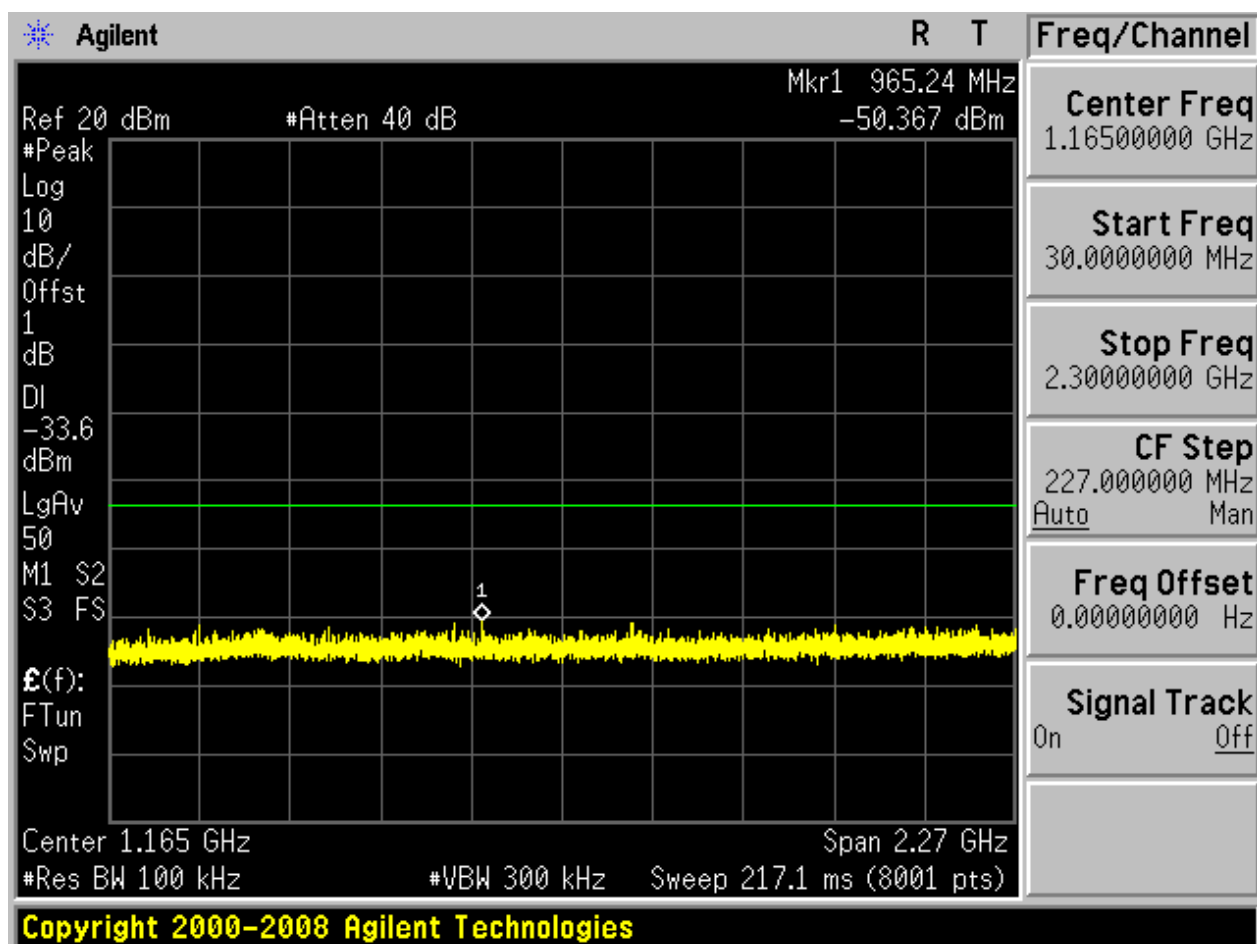

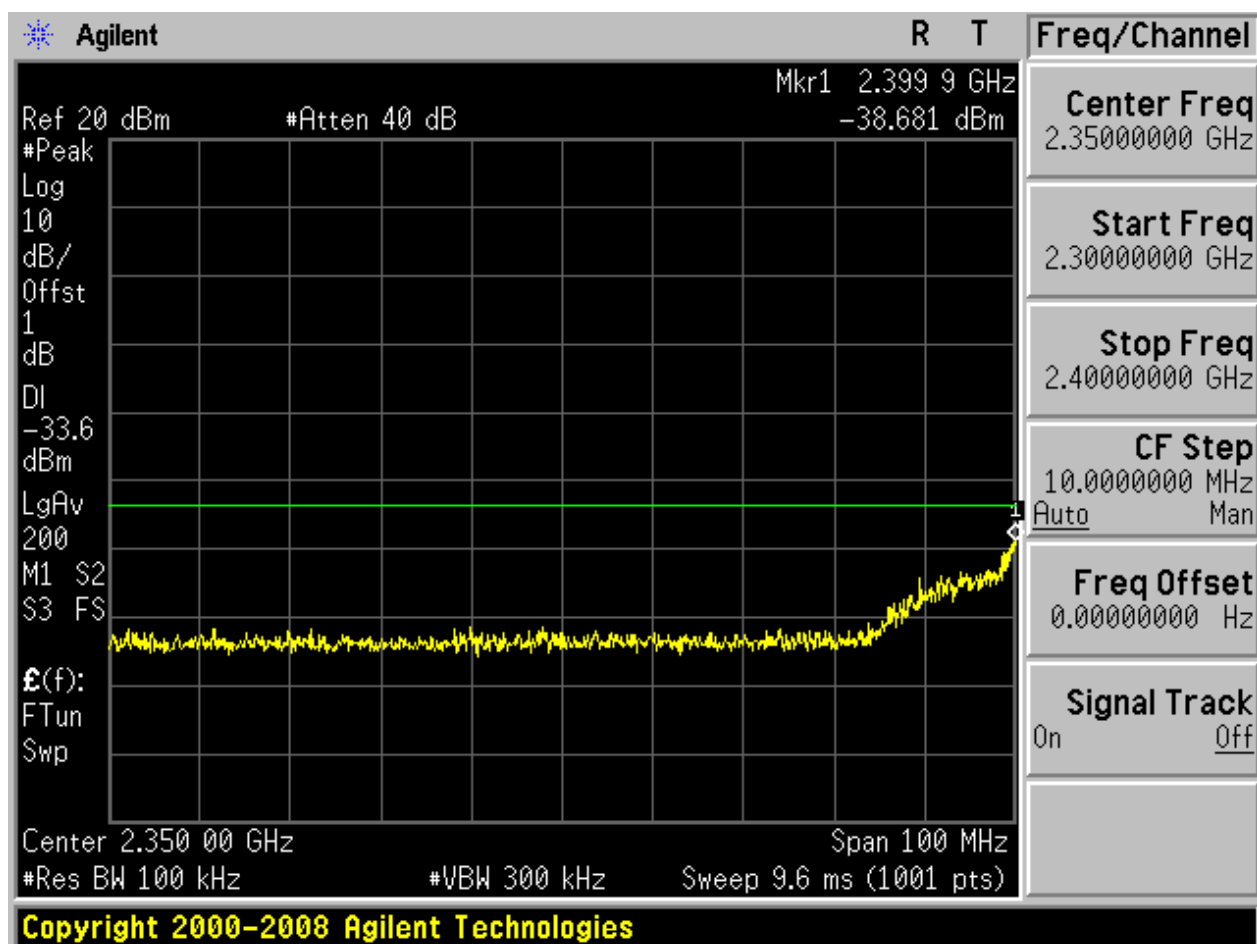


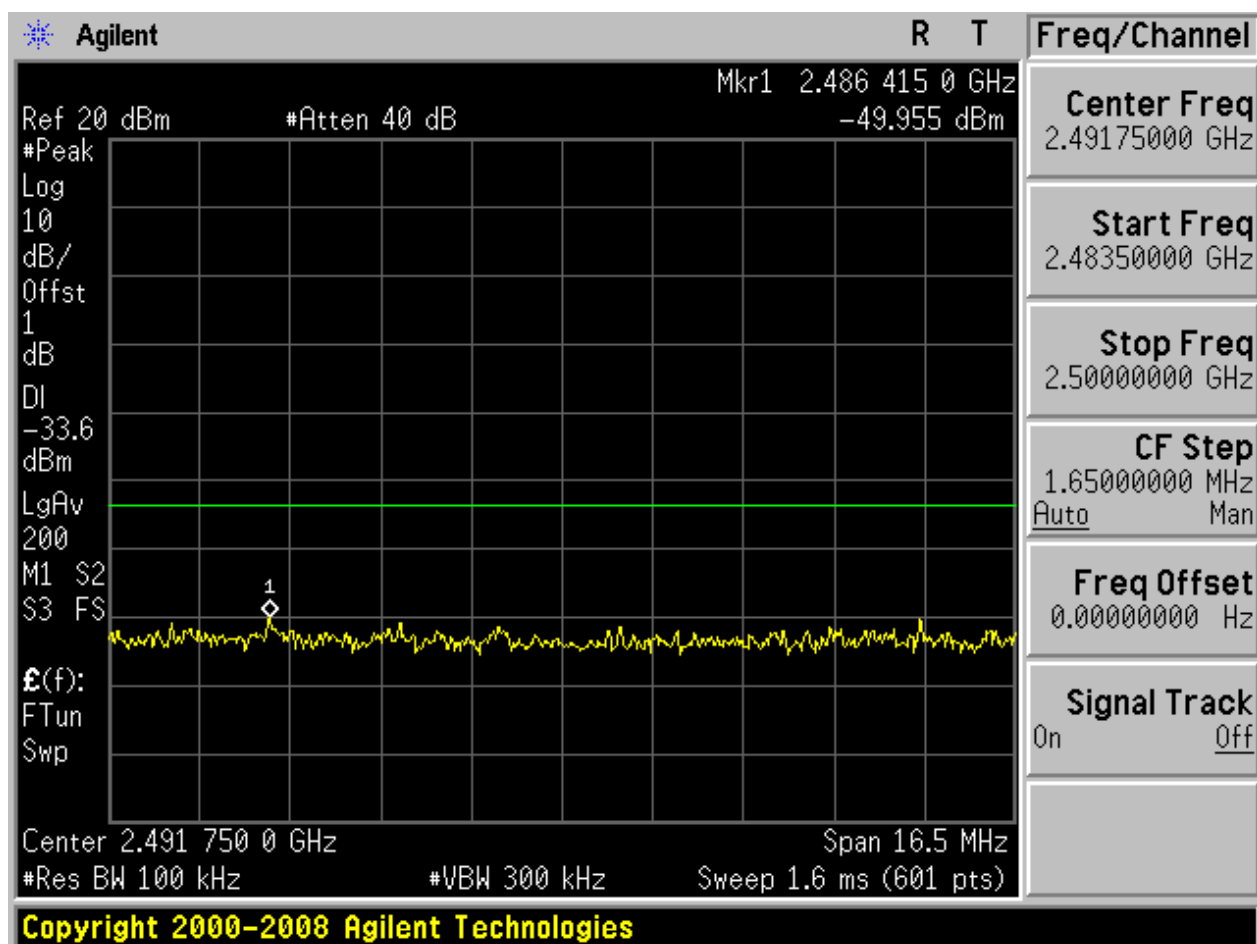

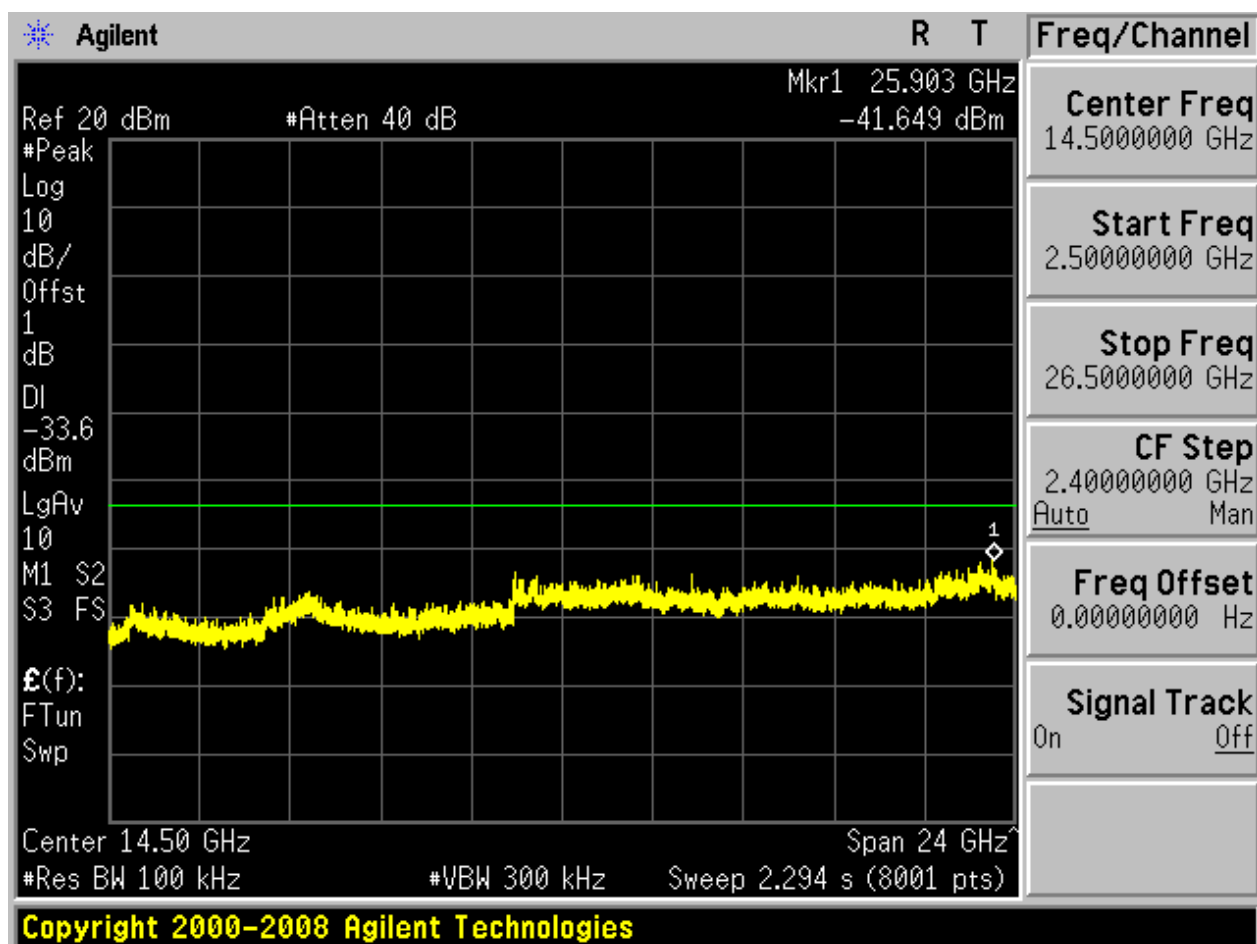



2.20 11N40_L@Ant 2


Pref:

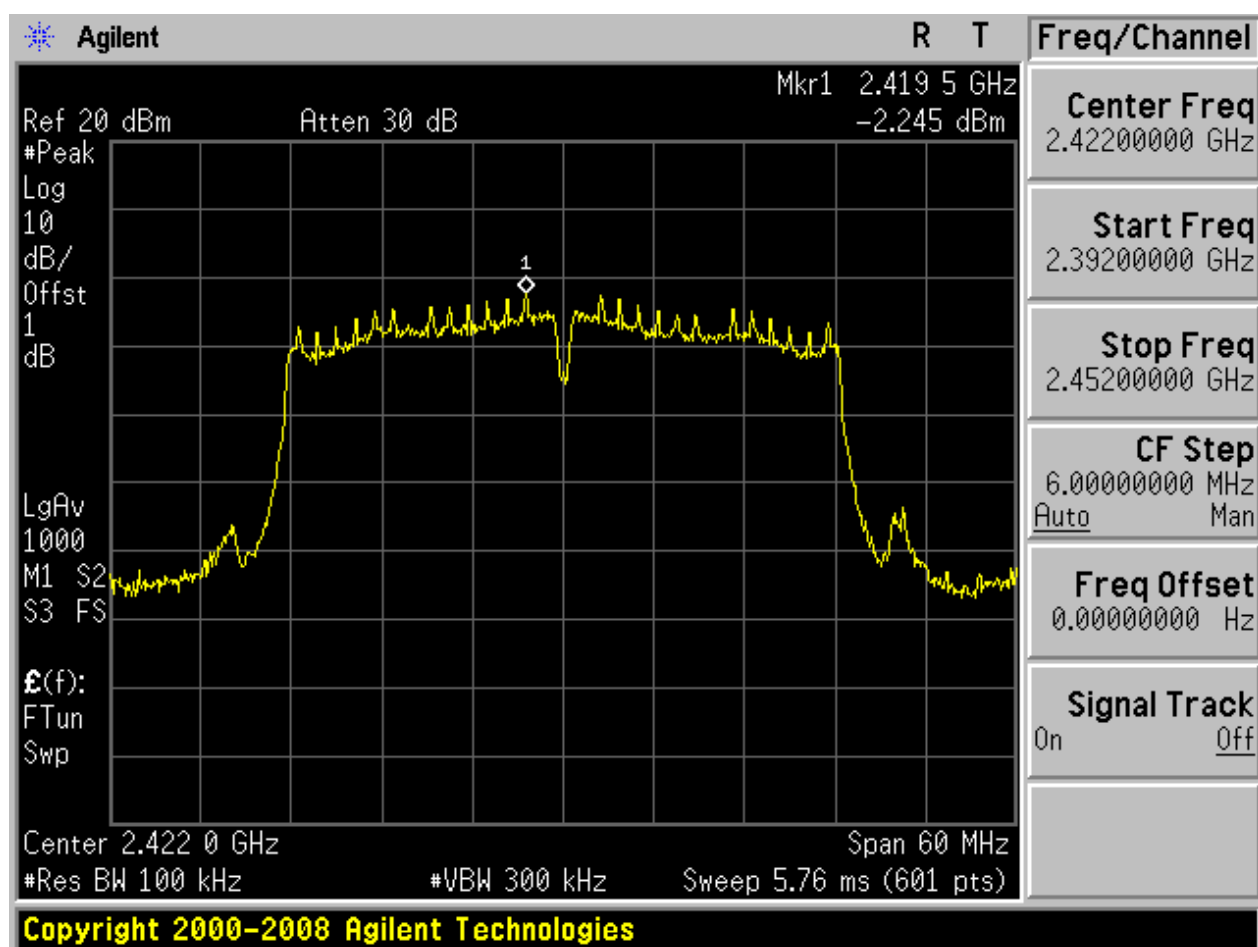



Puw:

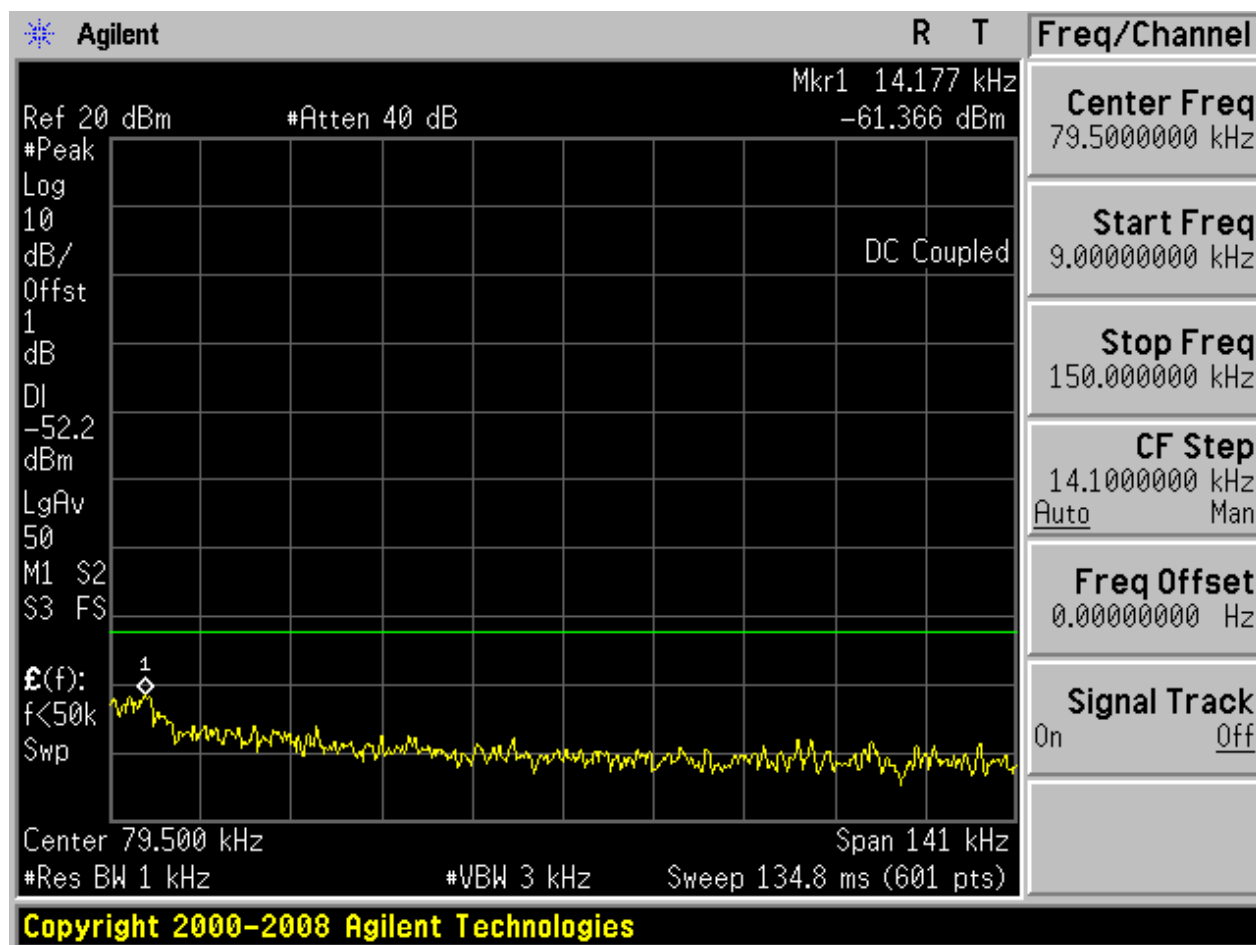


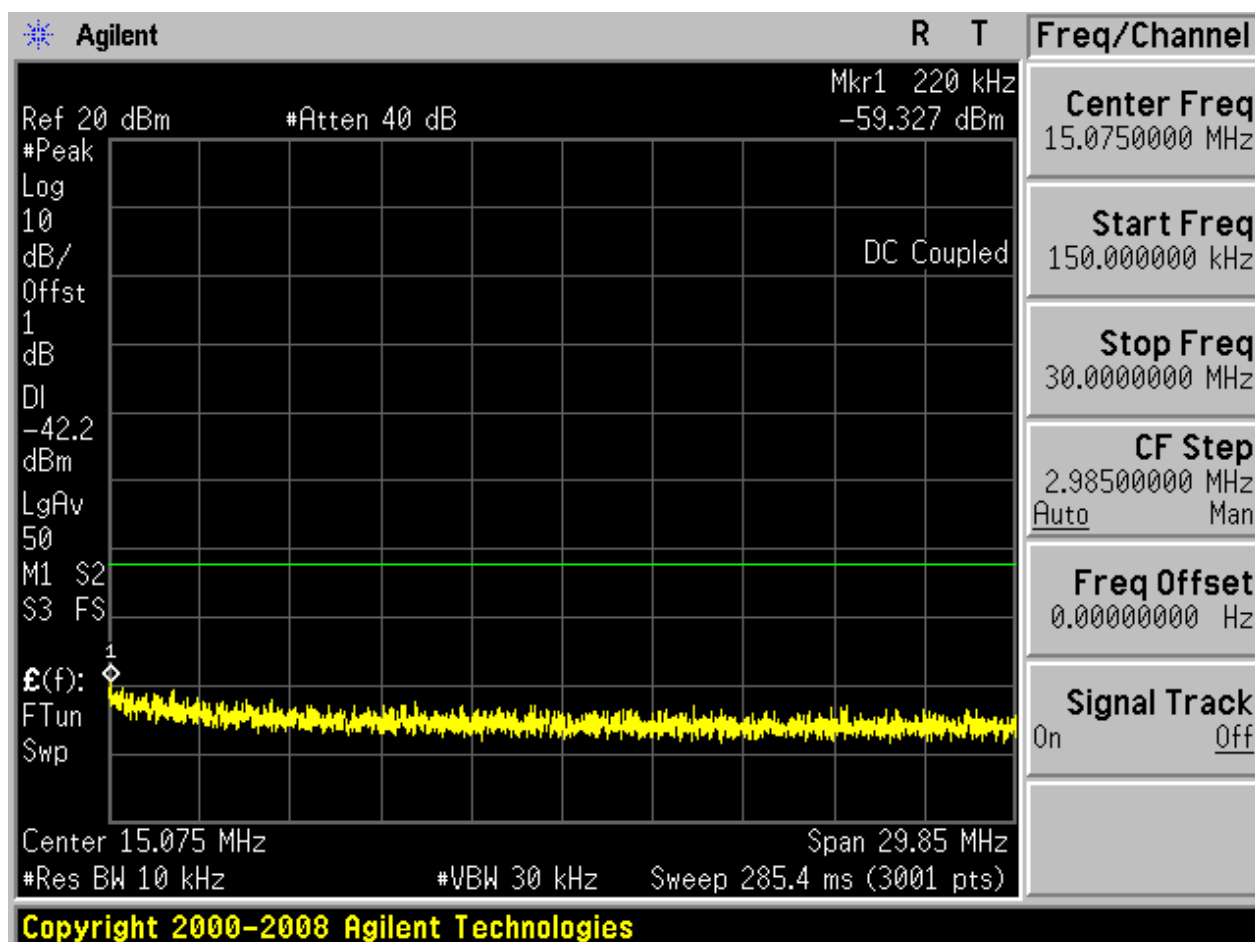

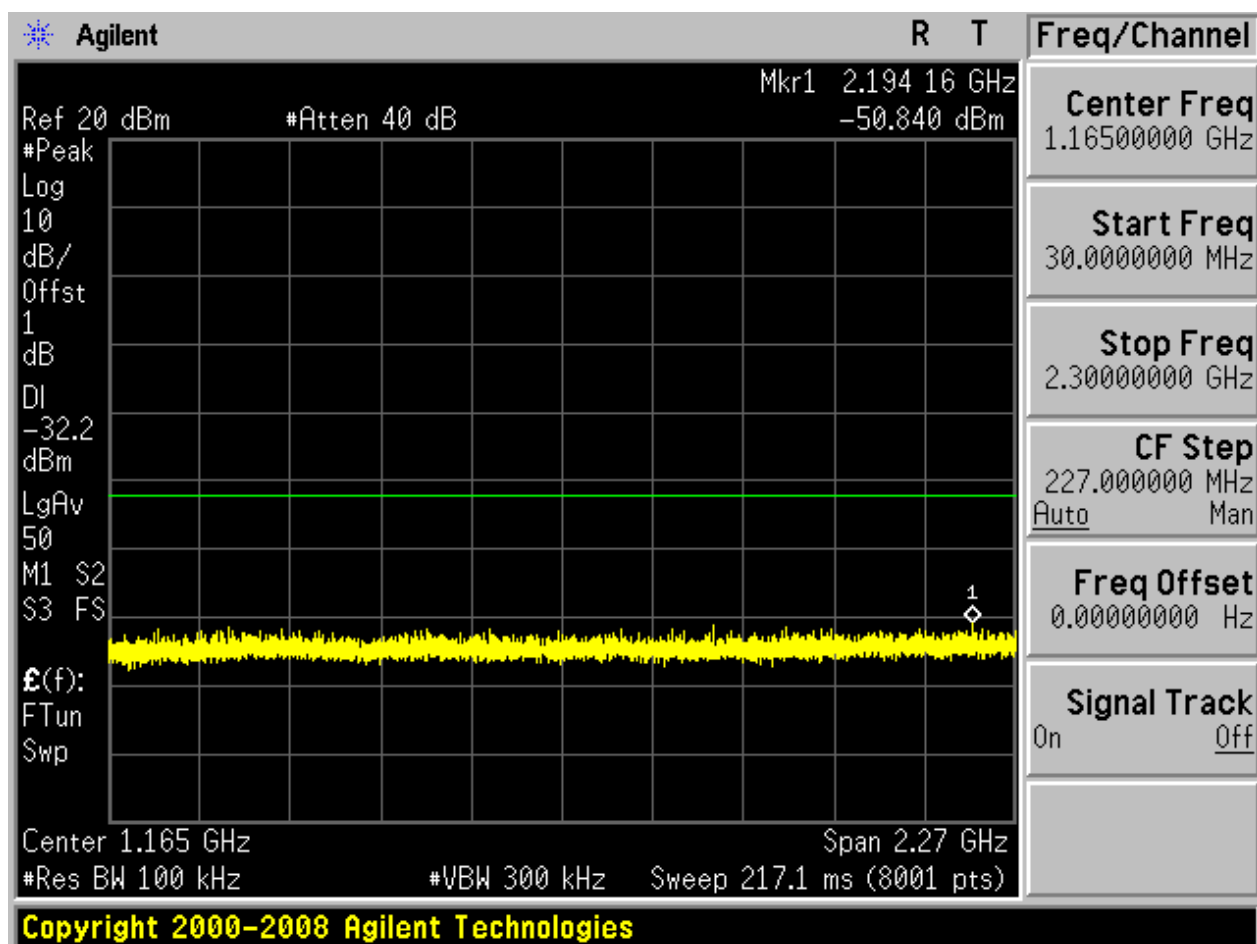

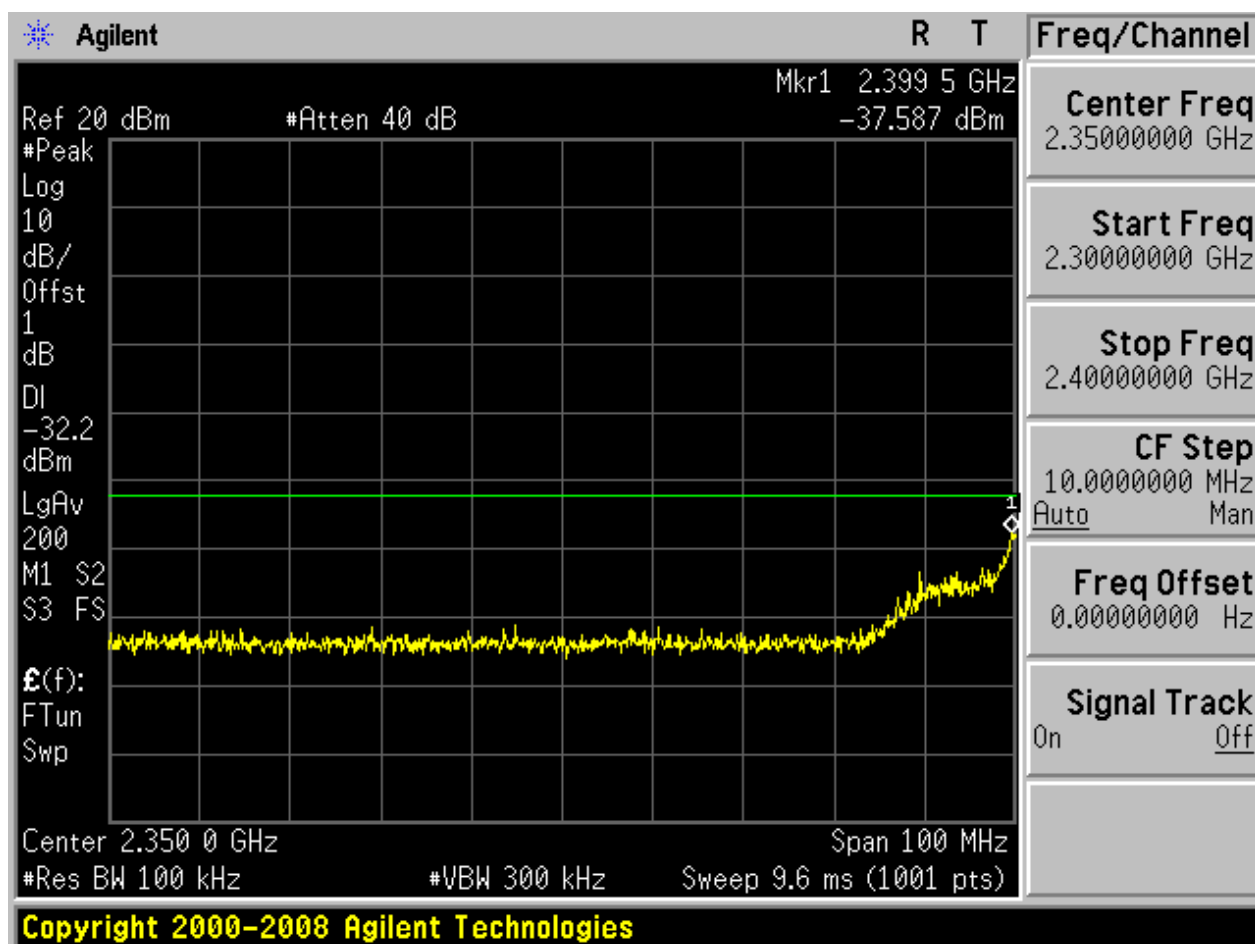


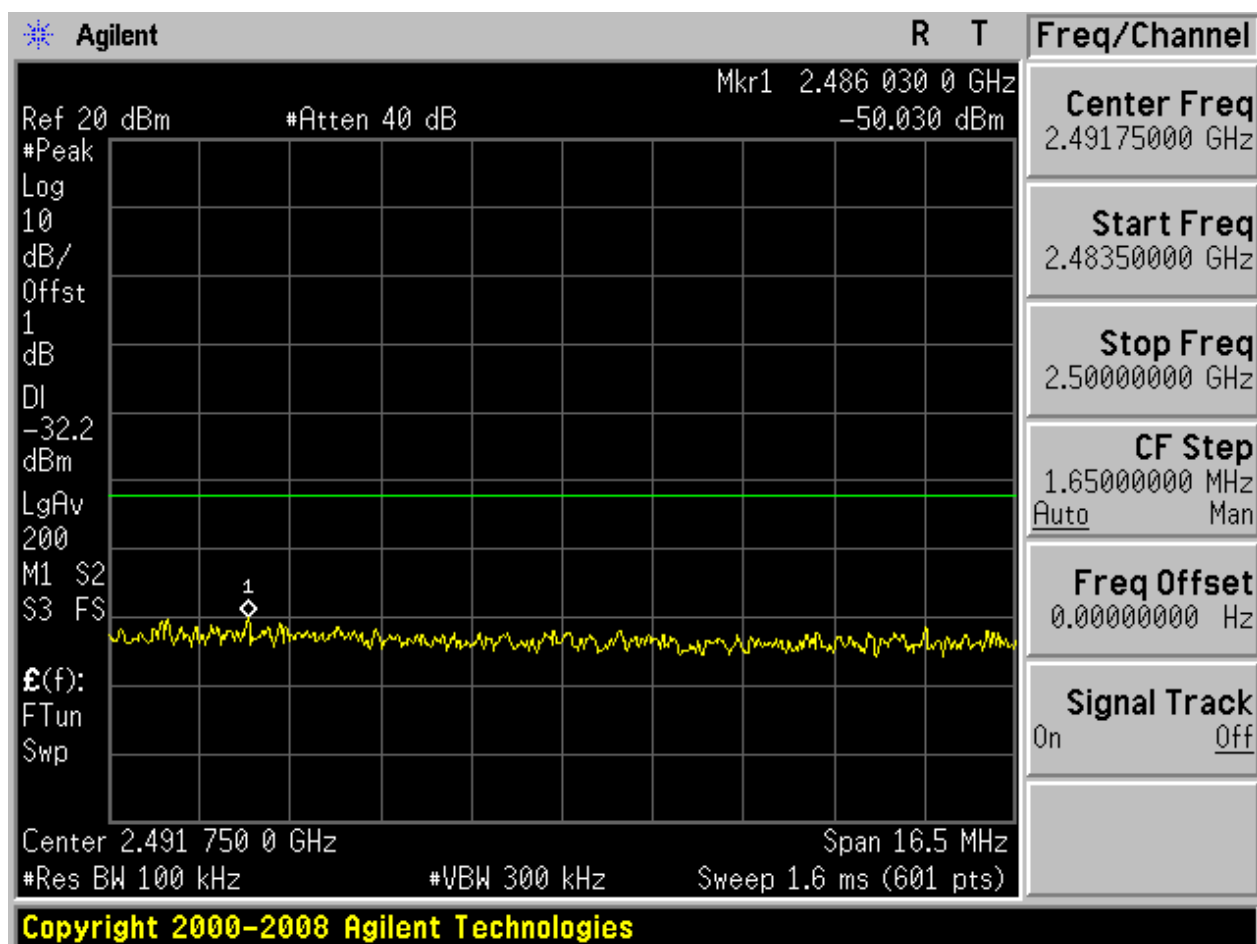

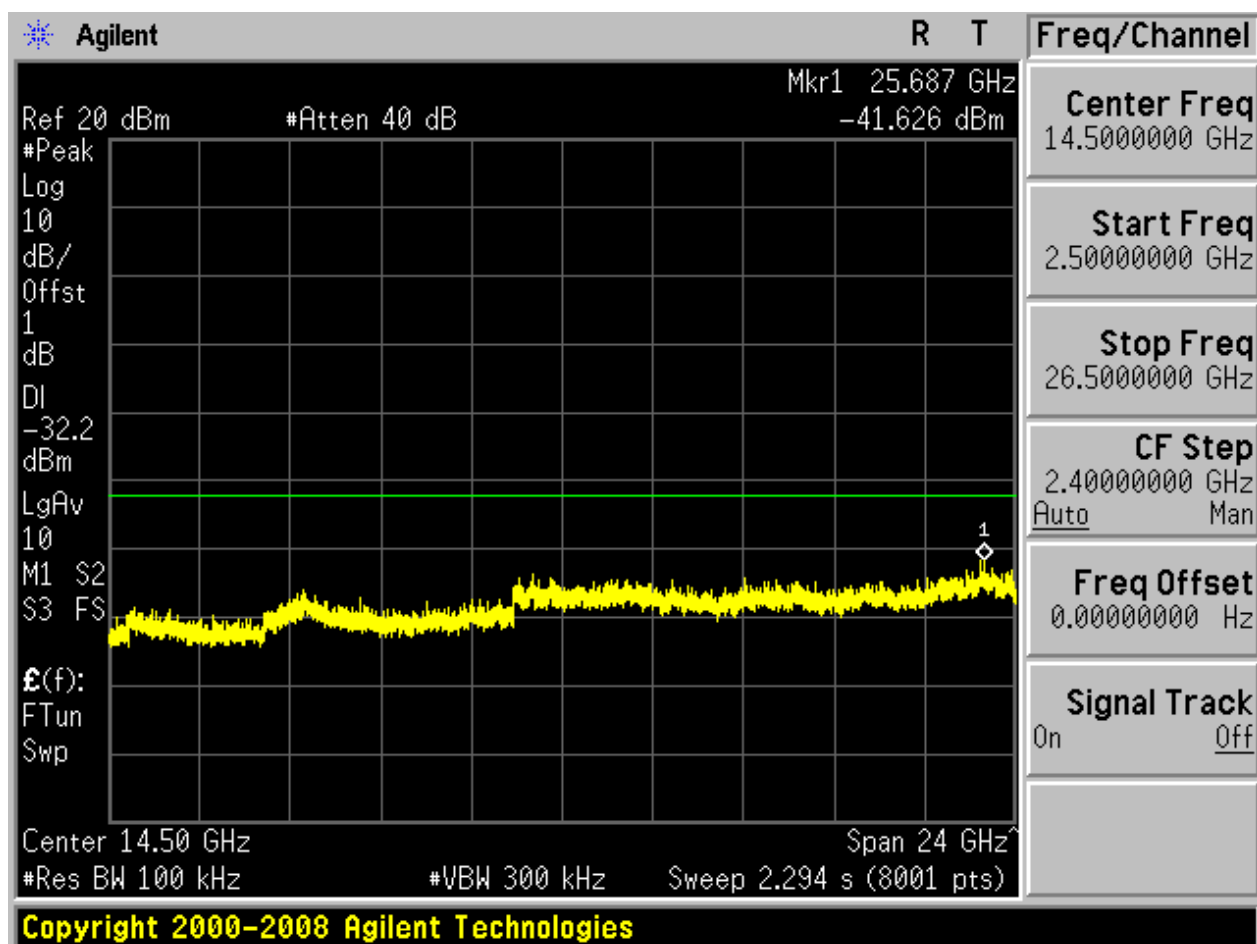


2.21 11N40_M@Ant 1


Pref:

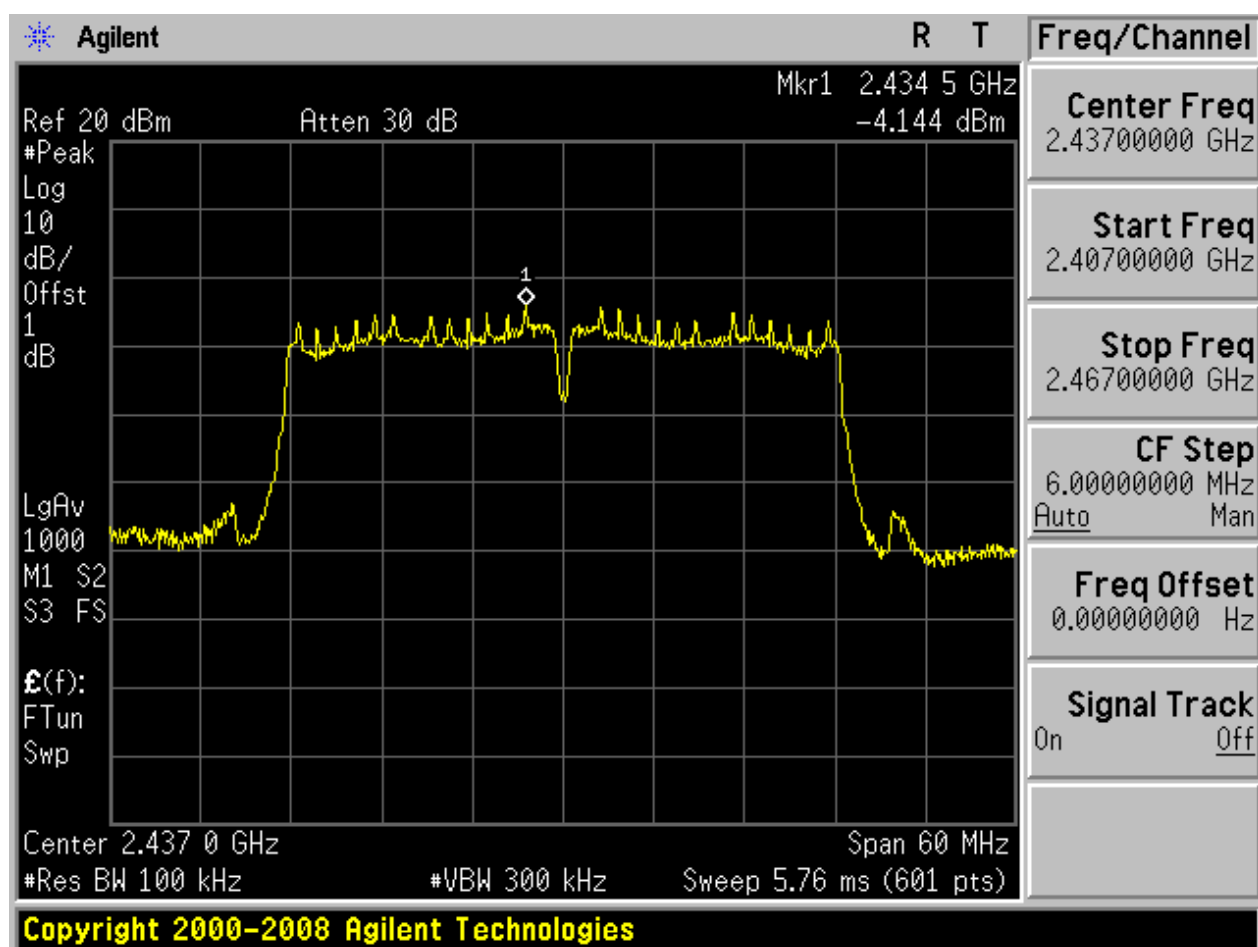






Puw:

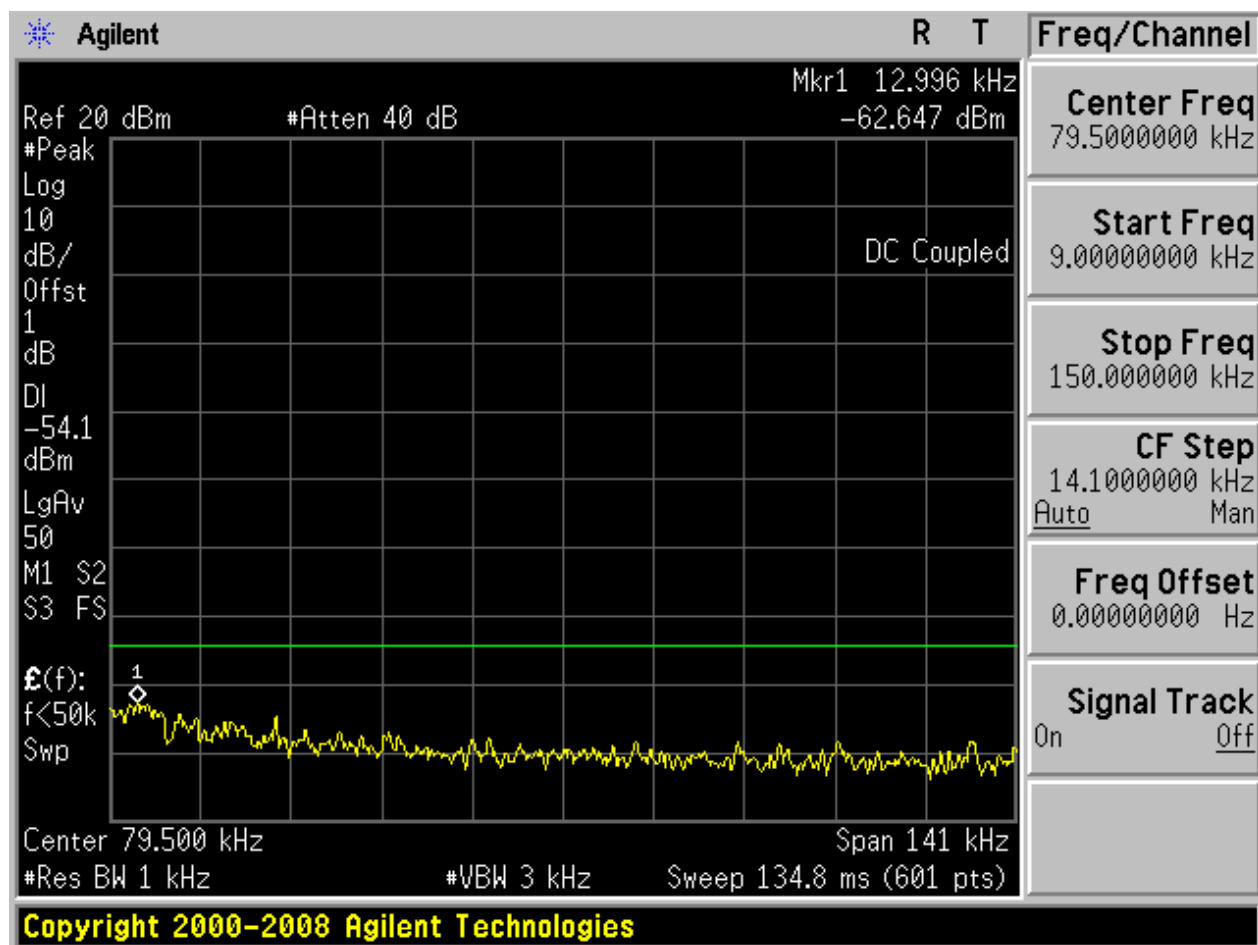


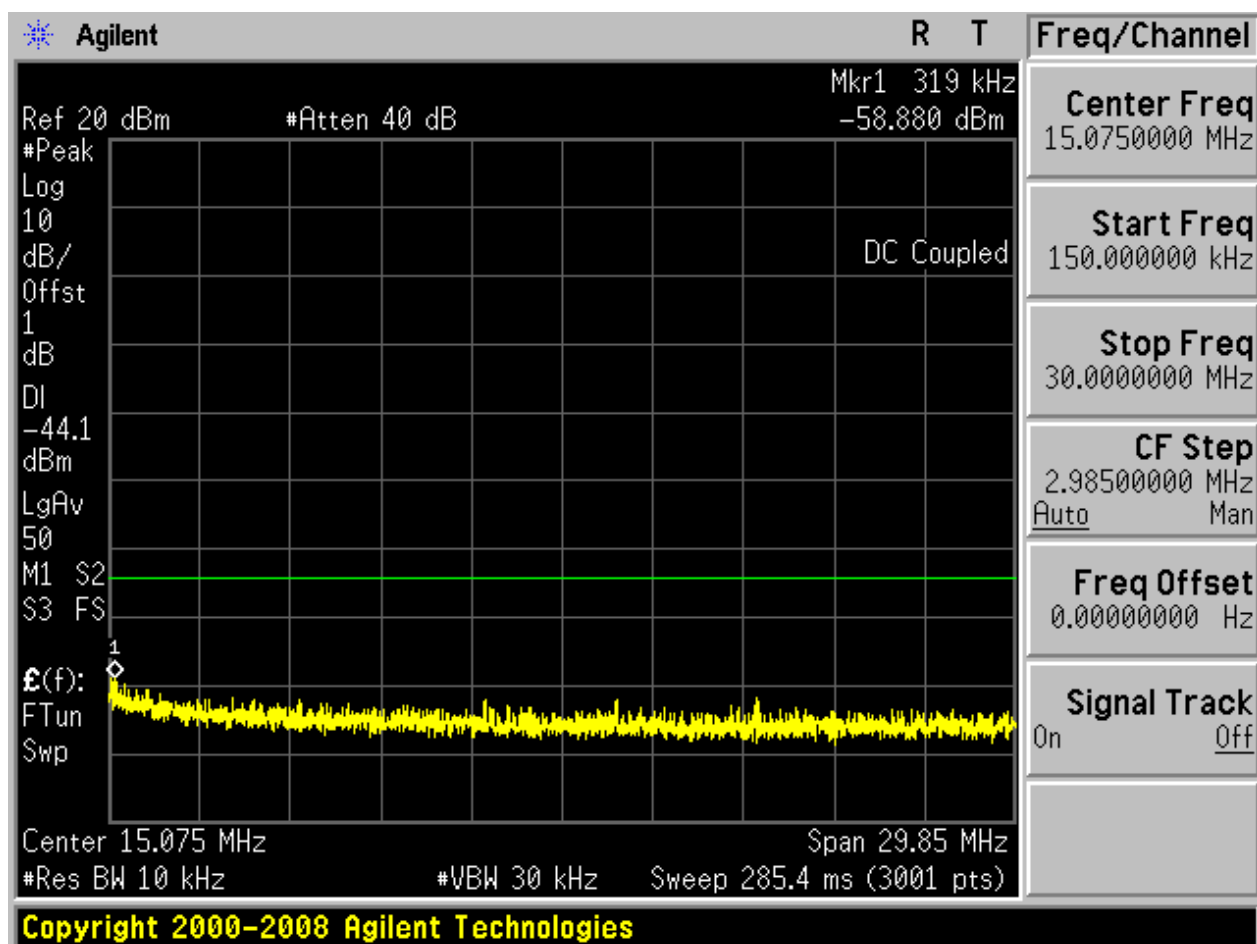

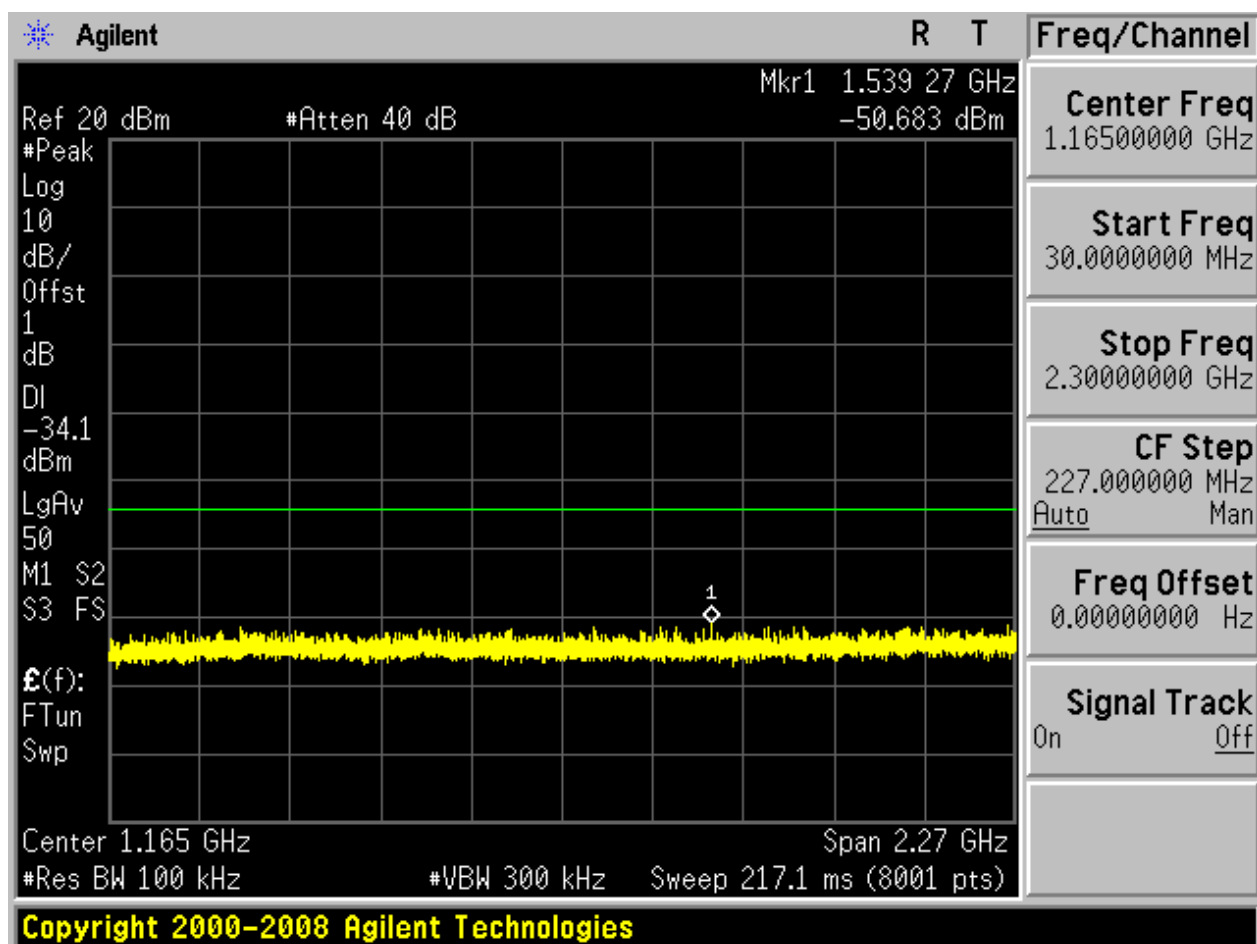

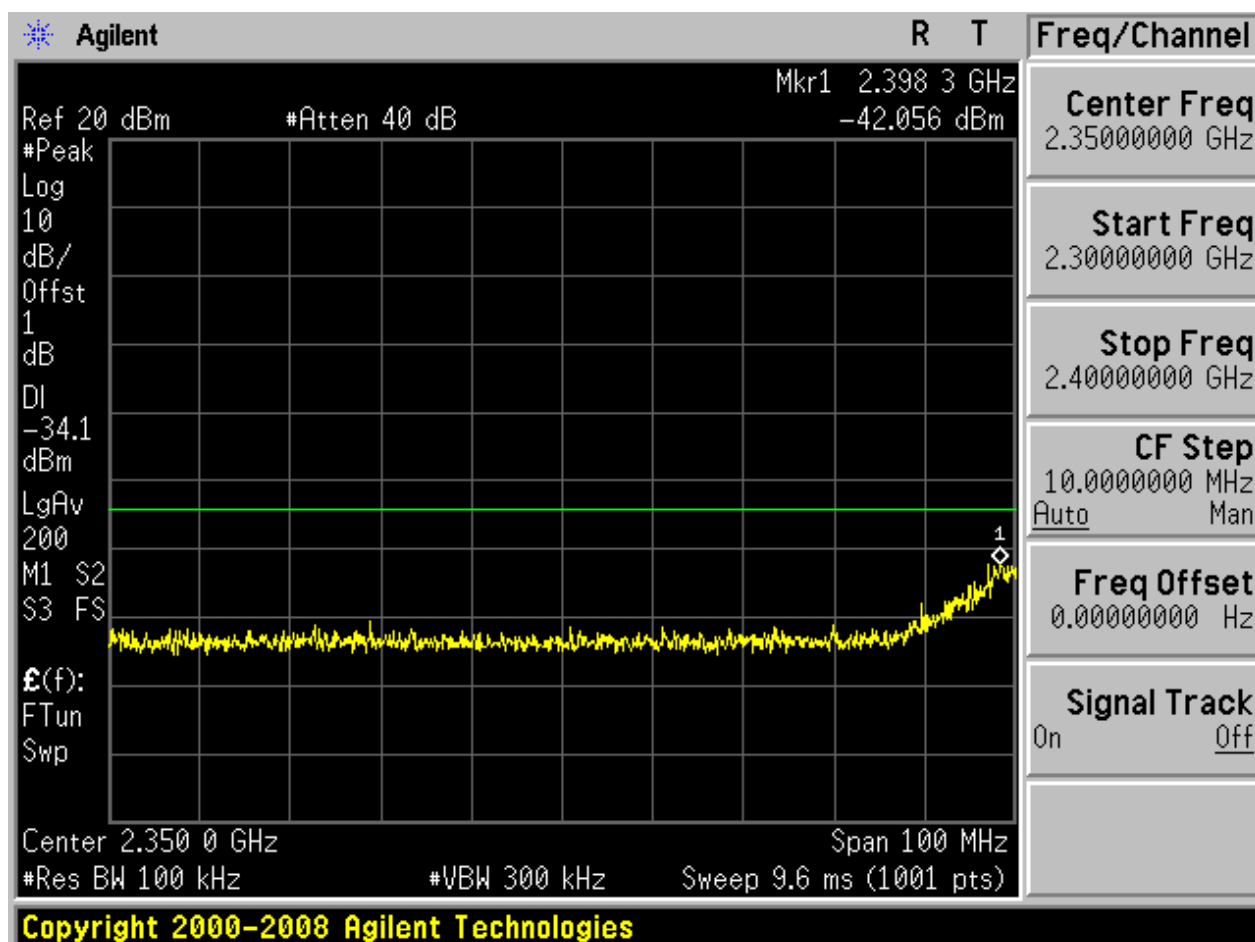


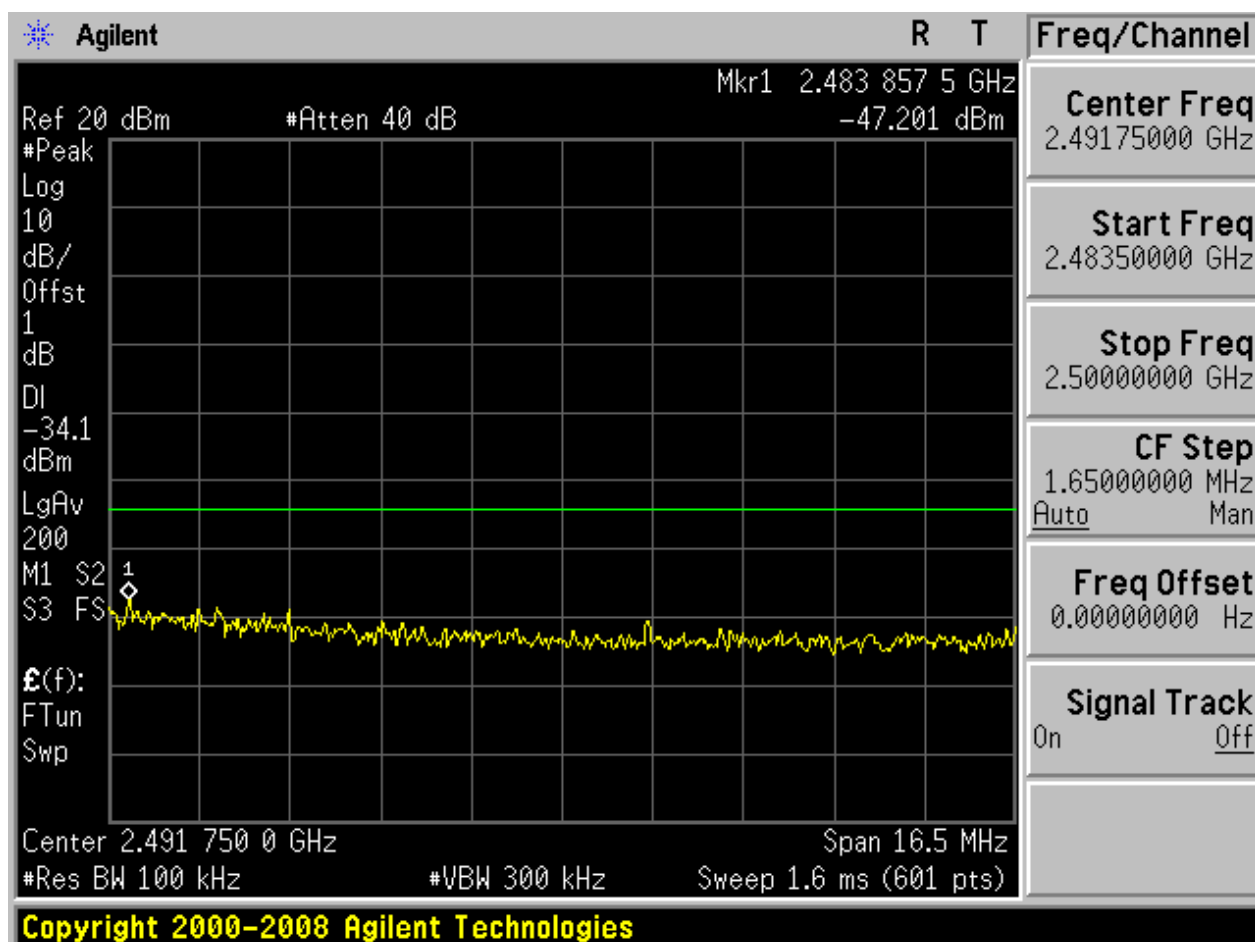

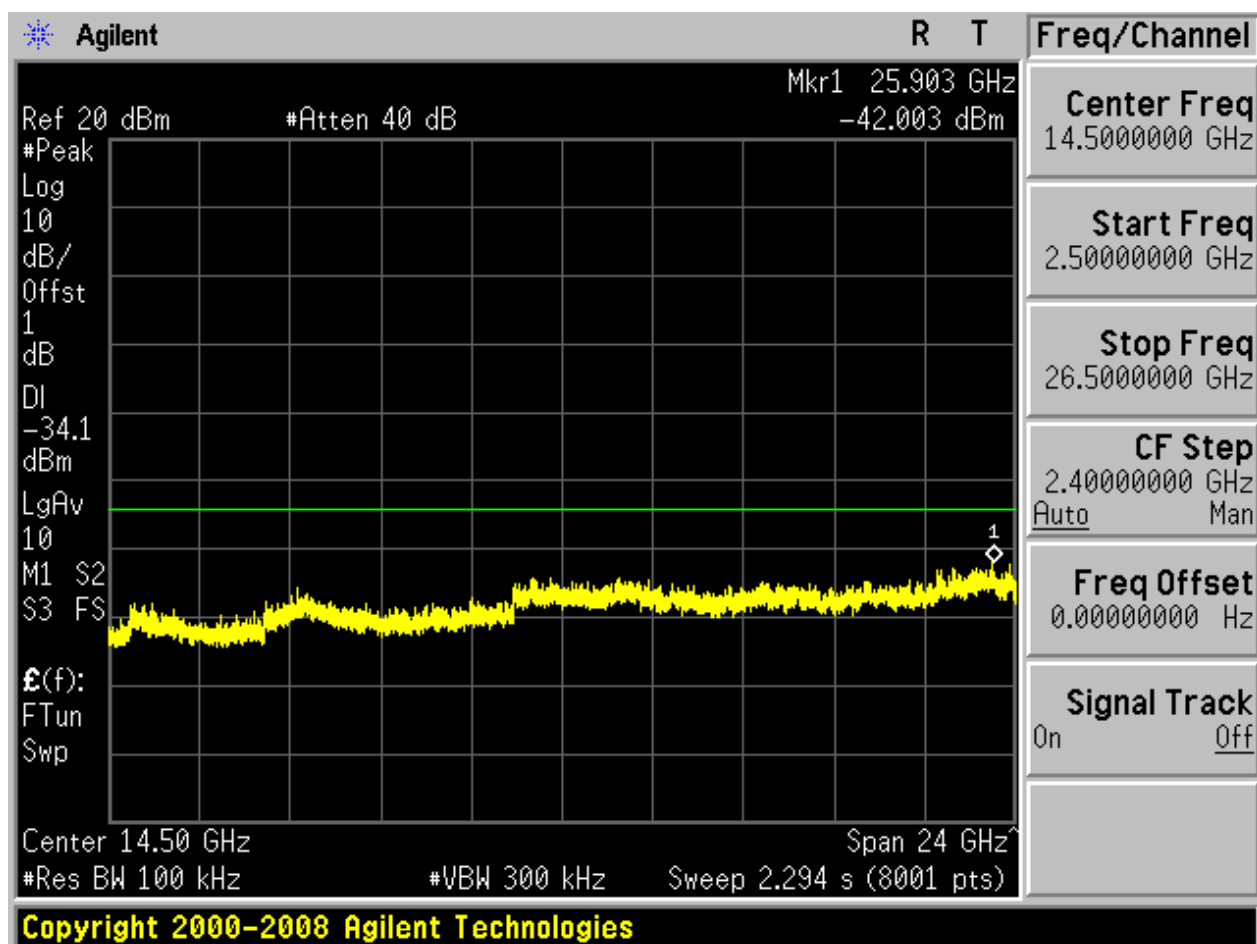


2.22 11N40_M@Ant 2


Pref:

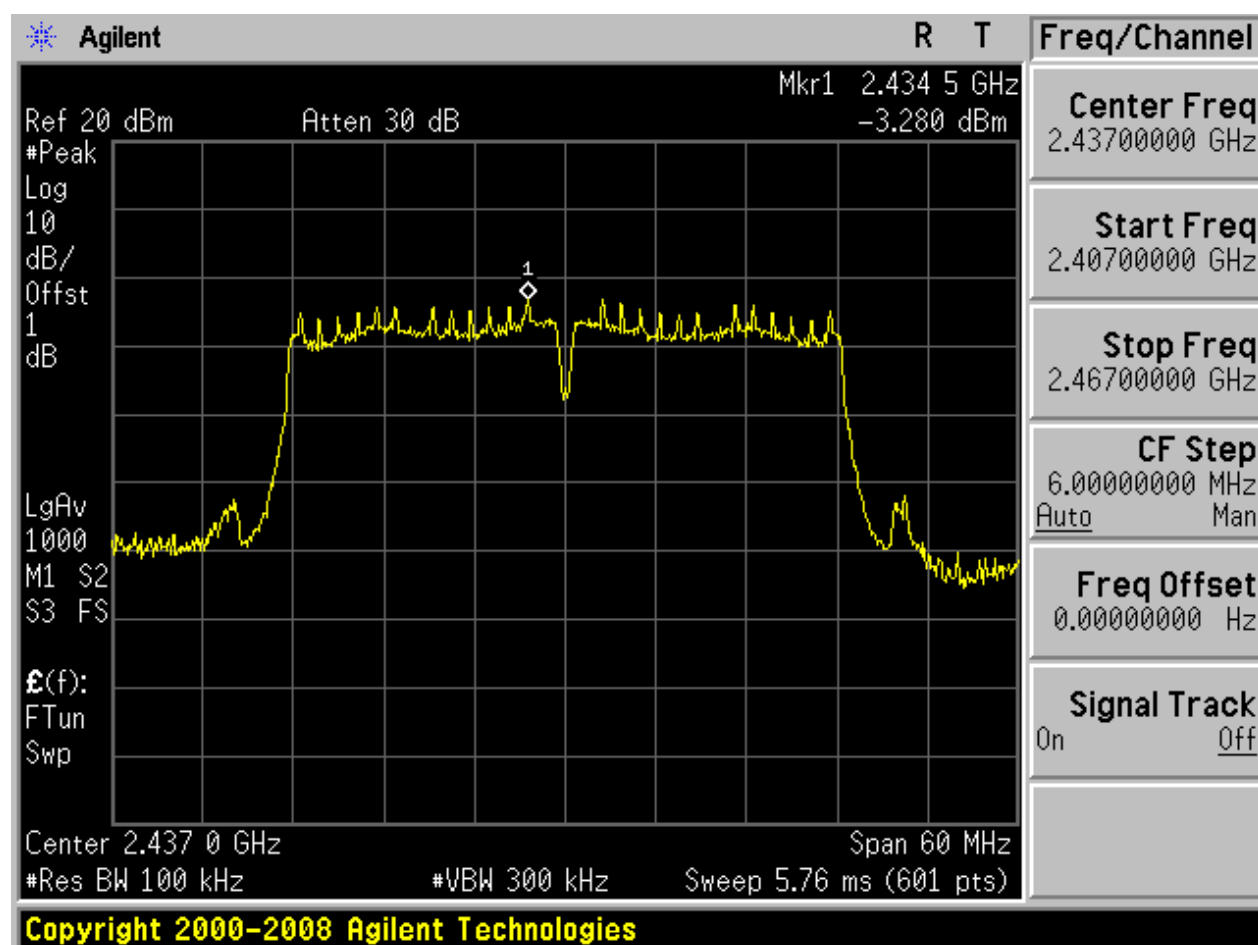






Puw:

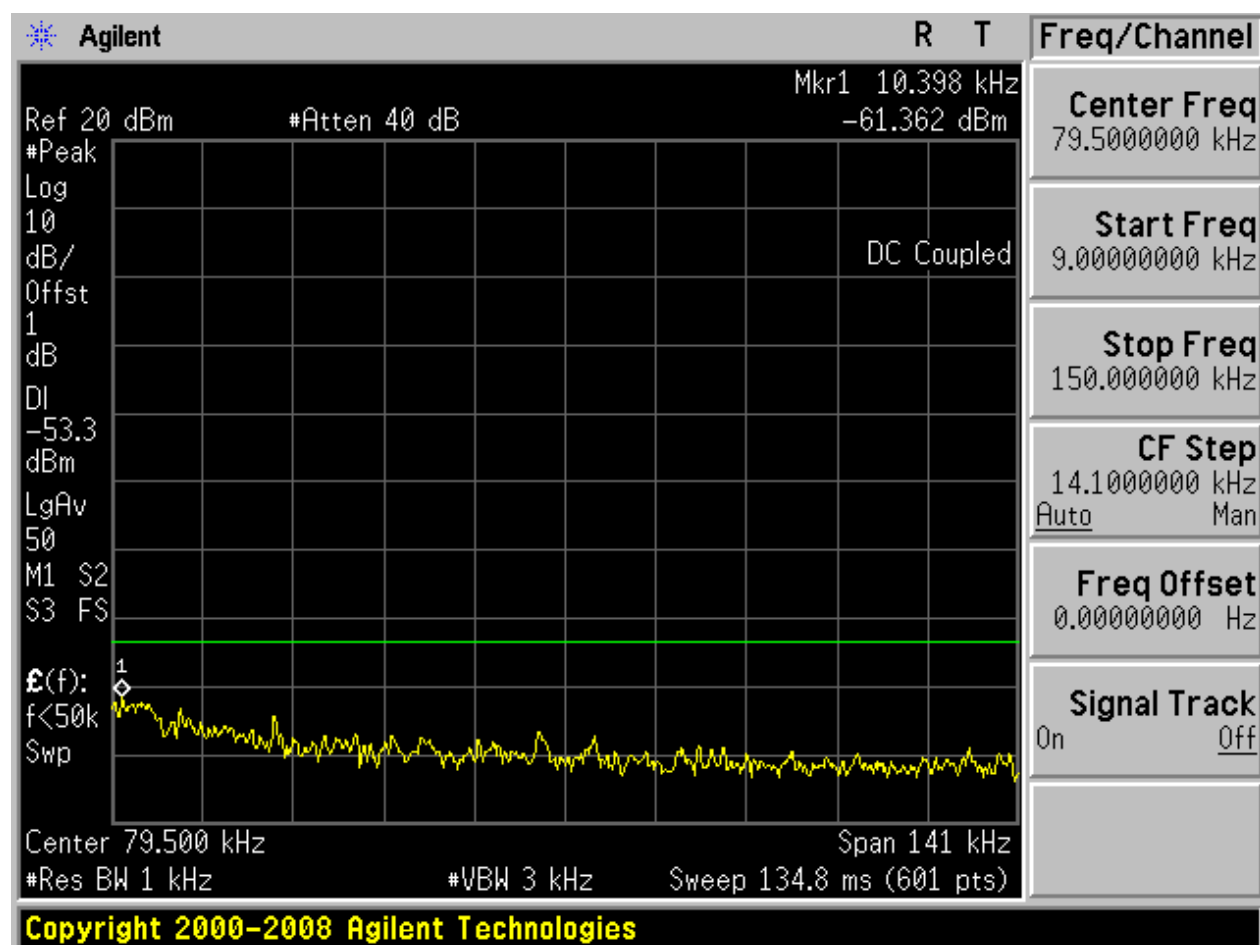


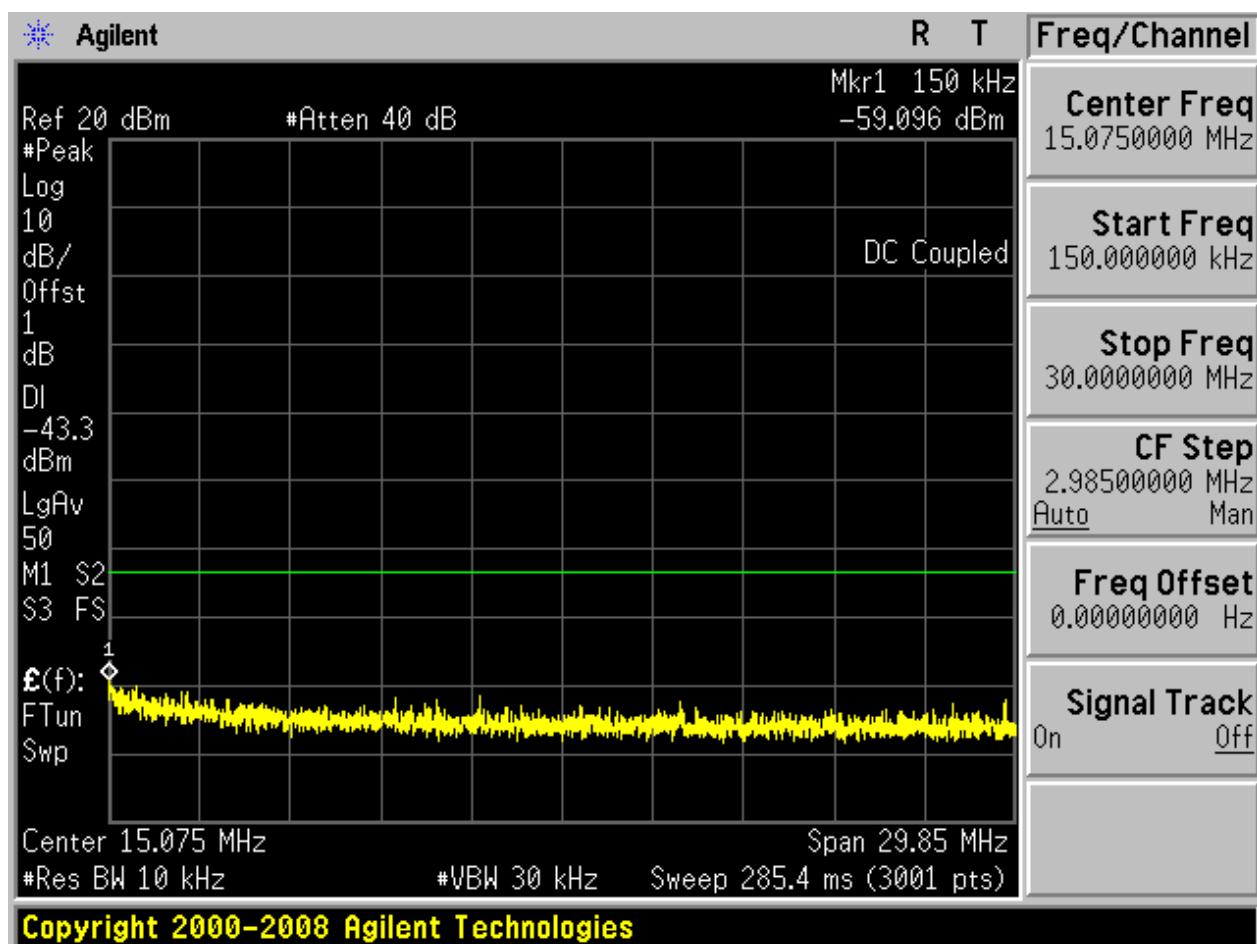

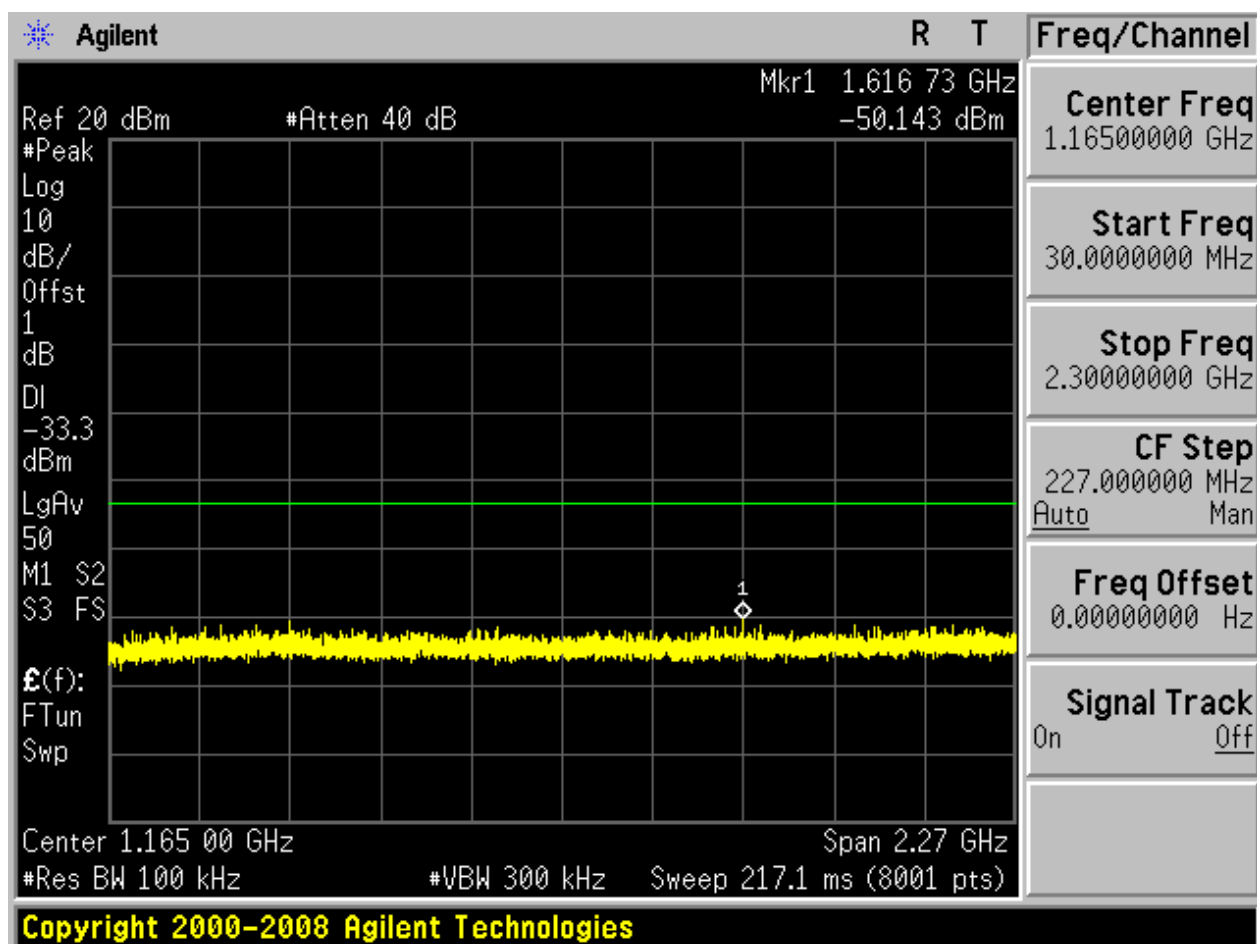

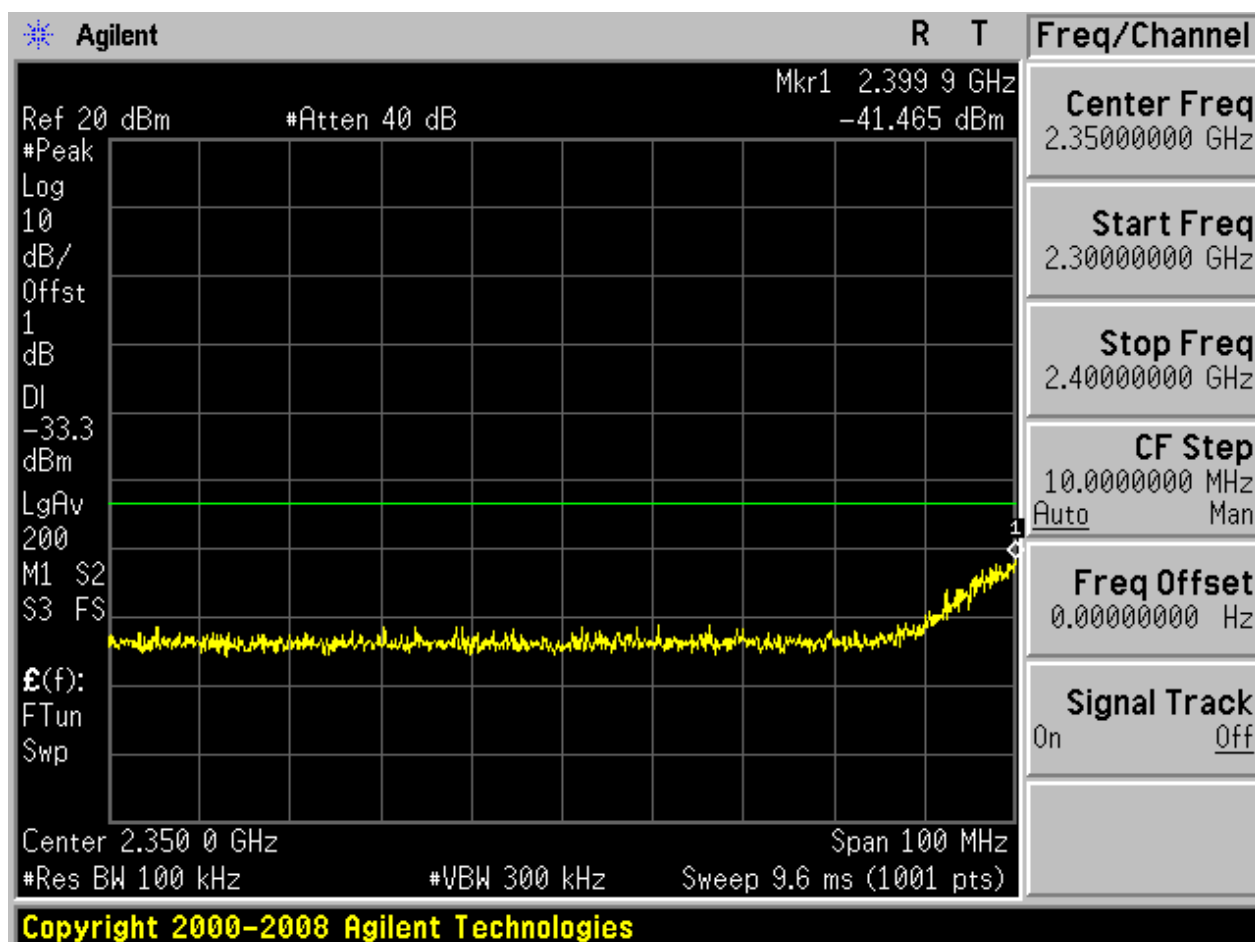


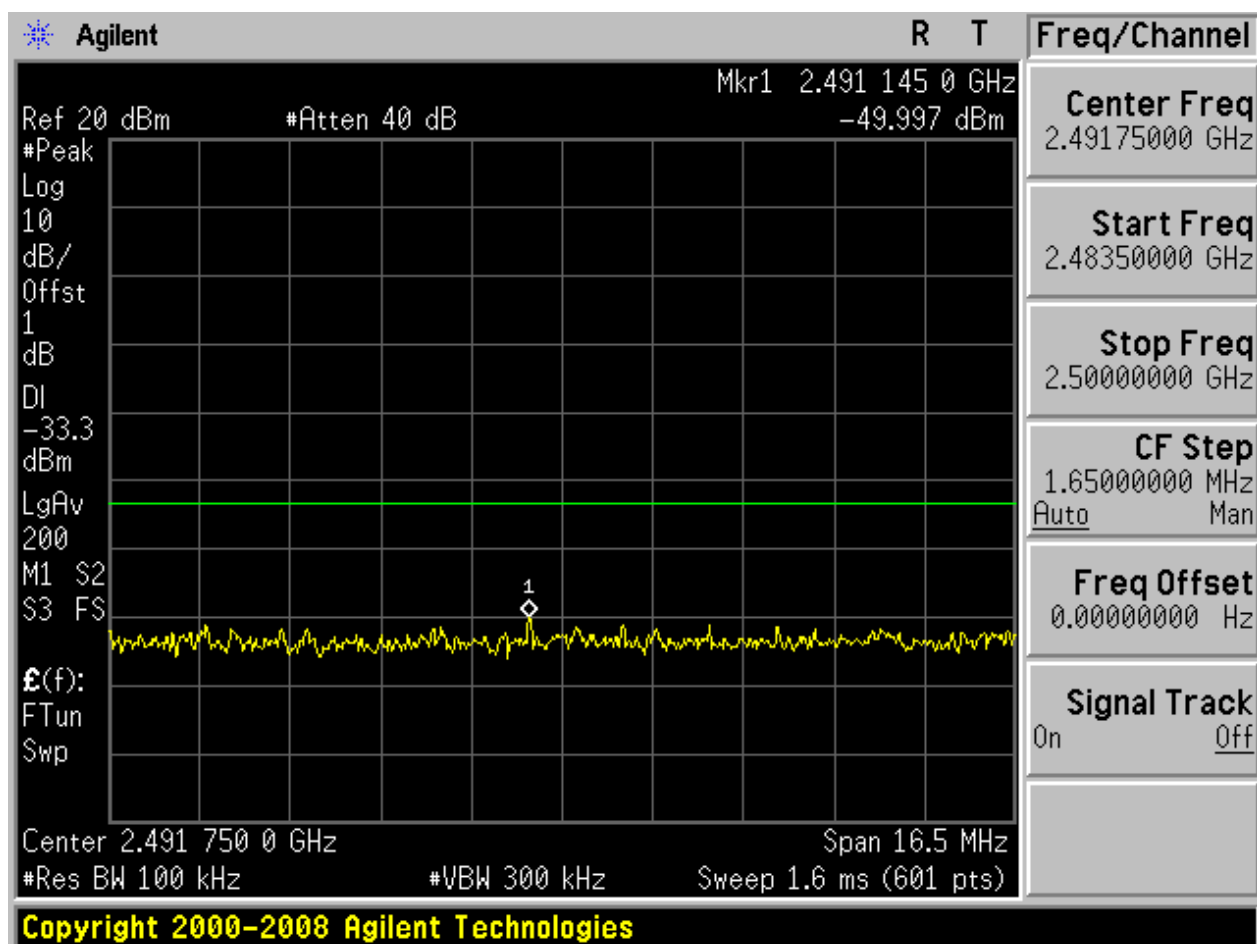

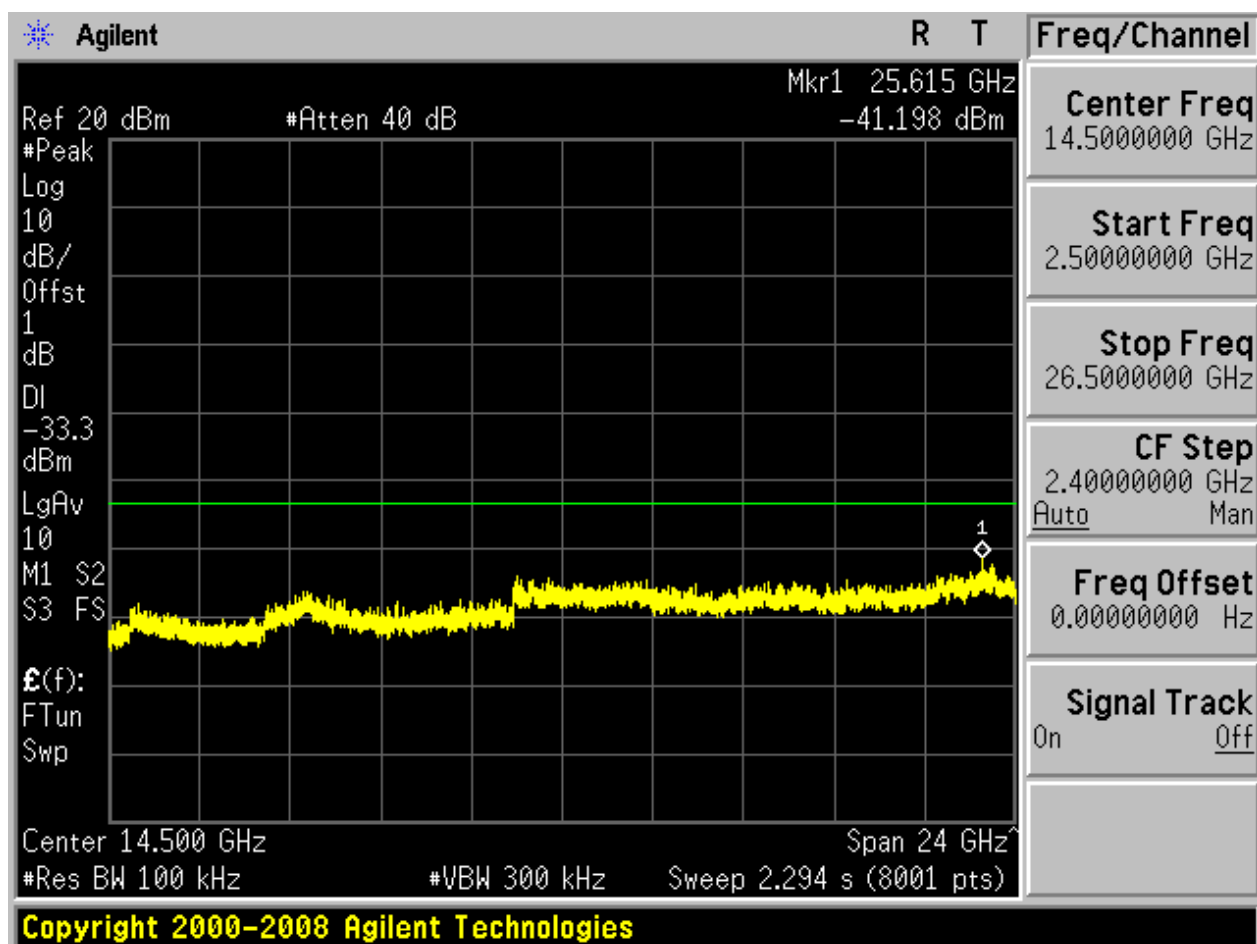


2.23 11N40_H@Ant 1


Pref:

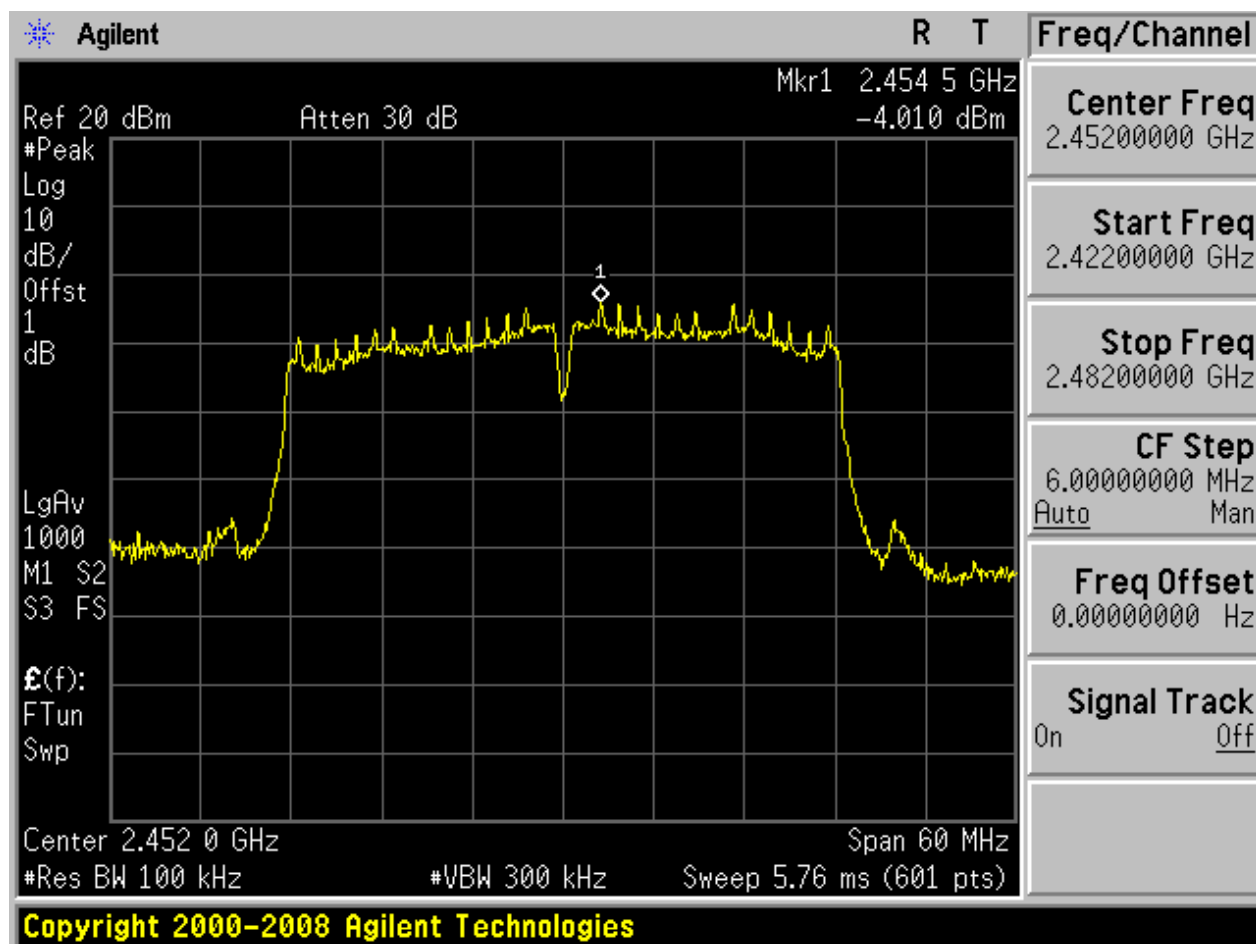






Puw:

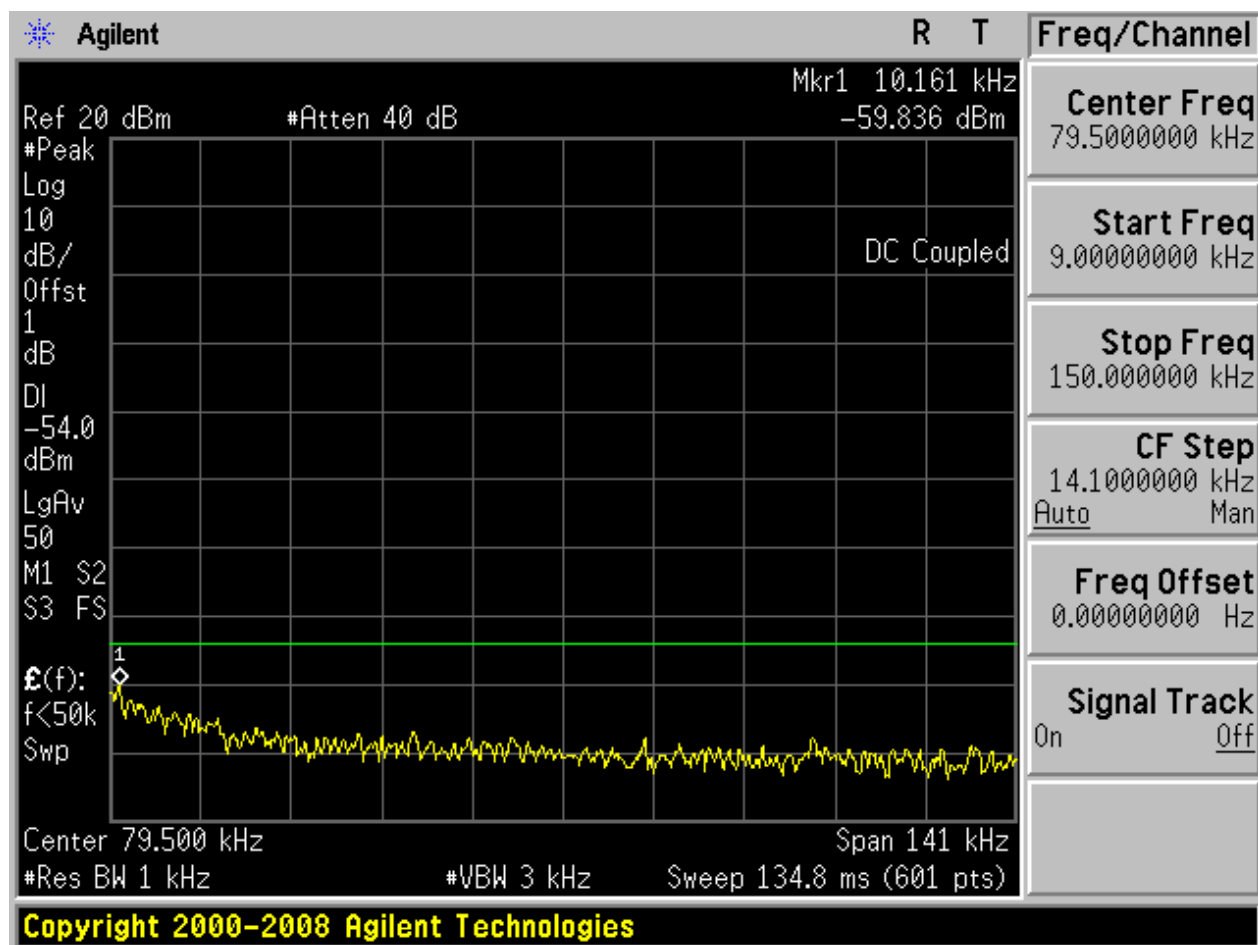


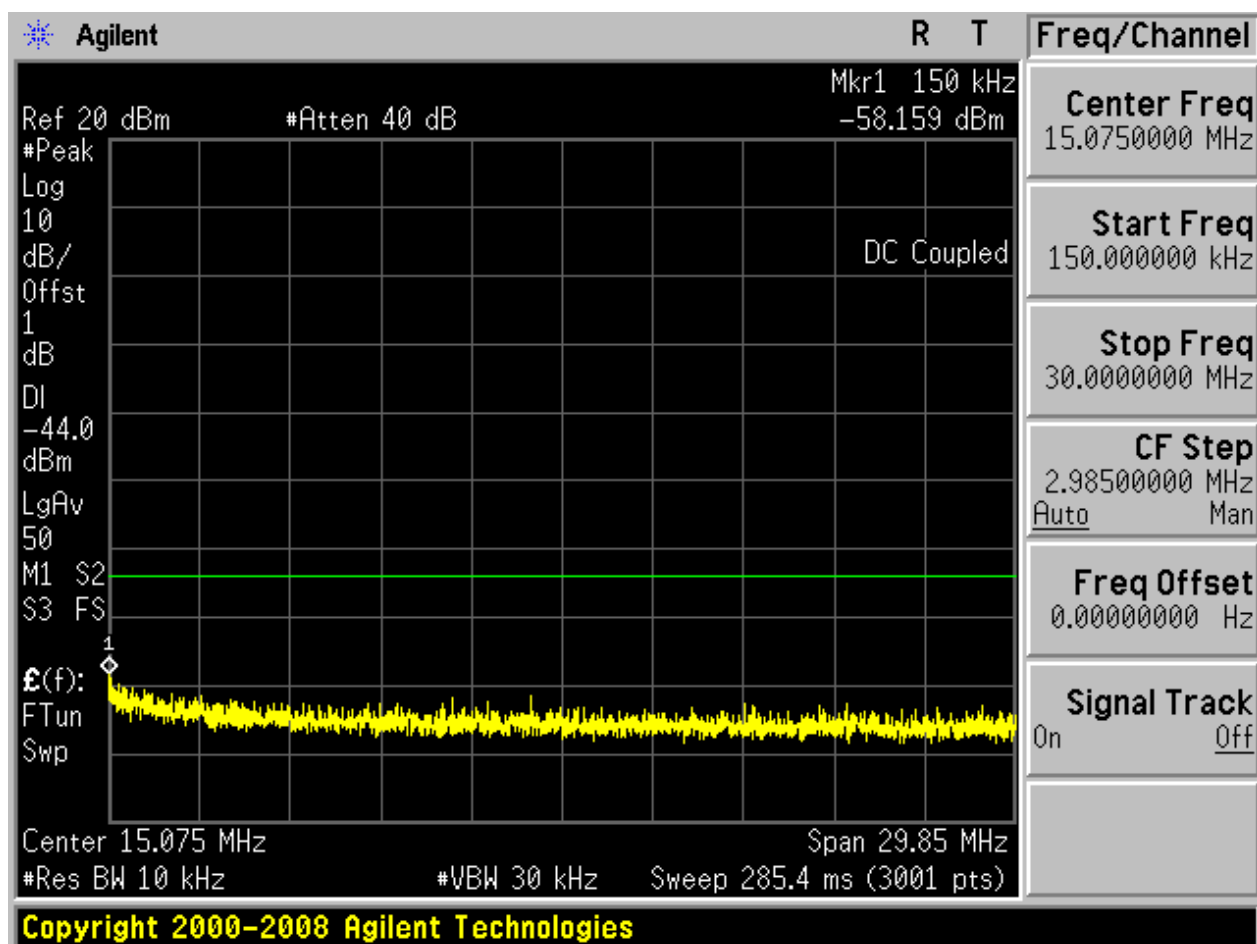

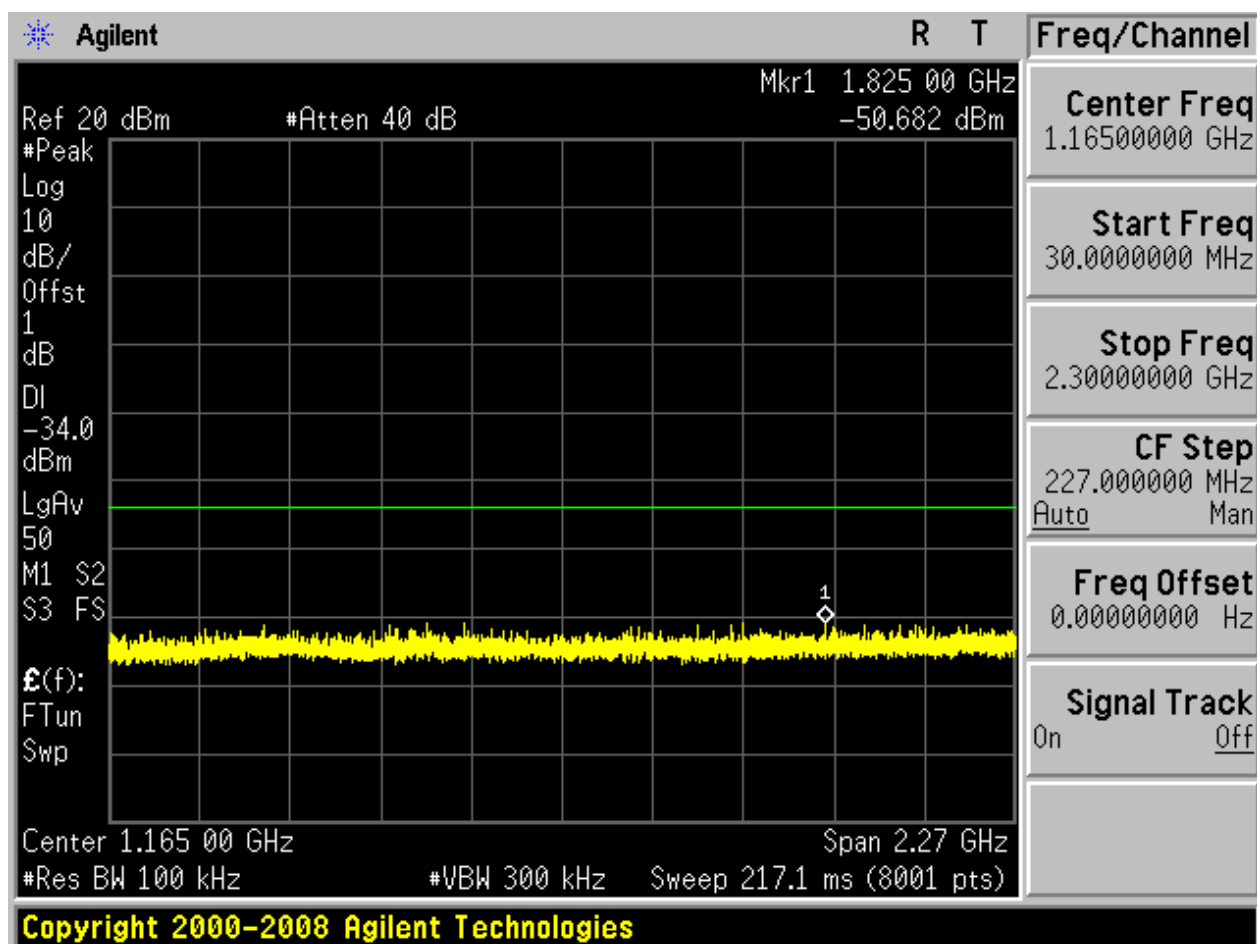

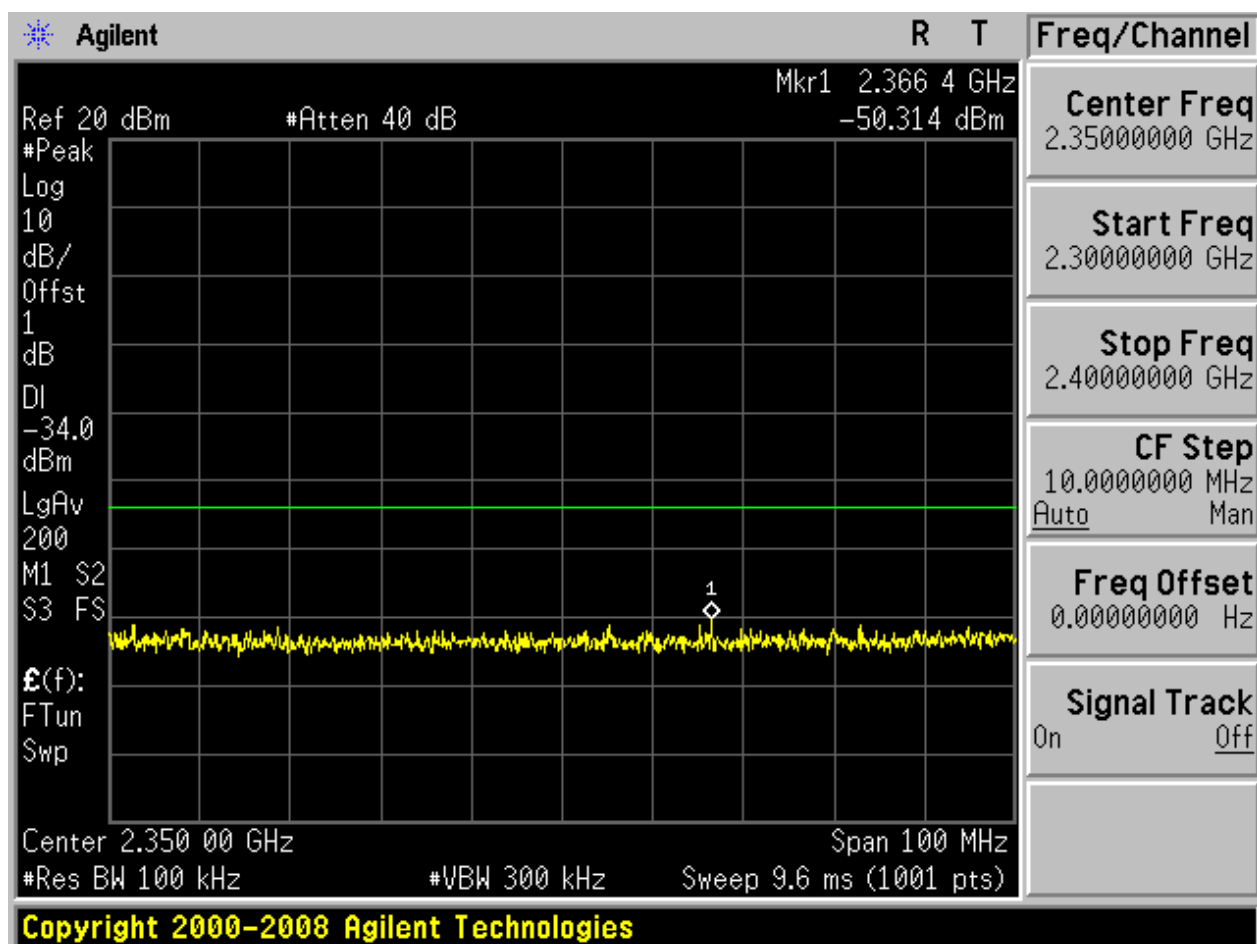


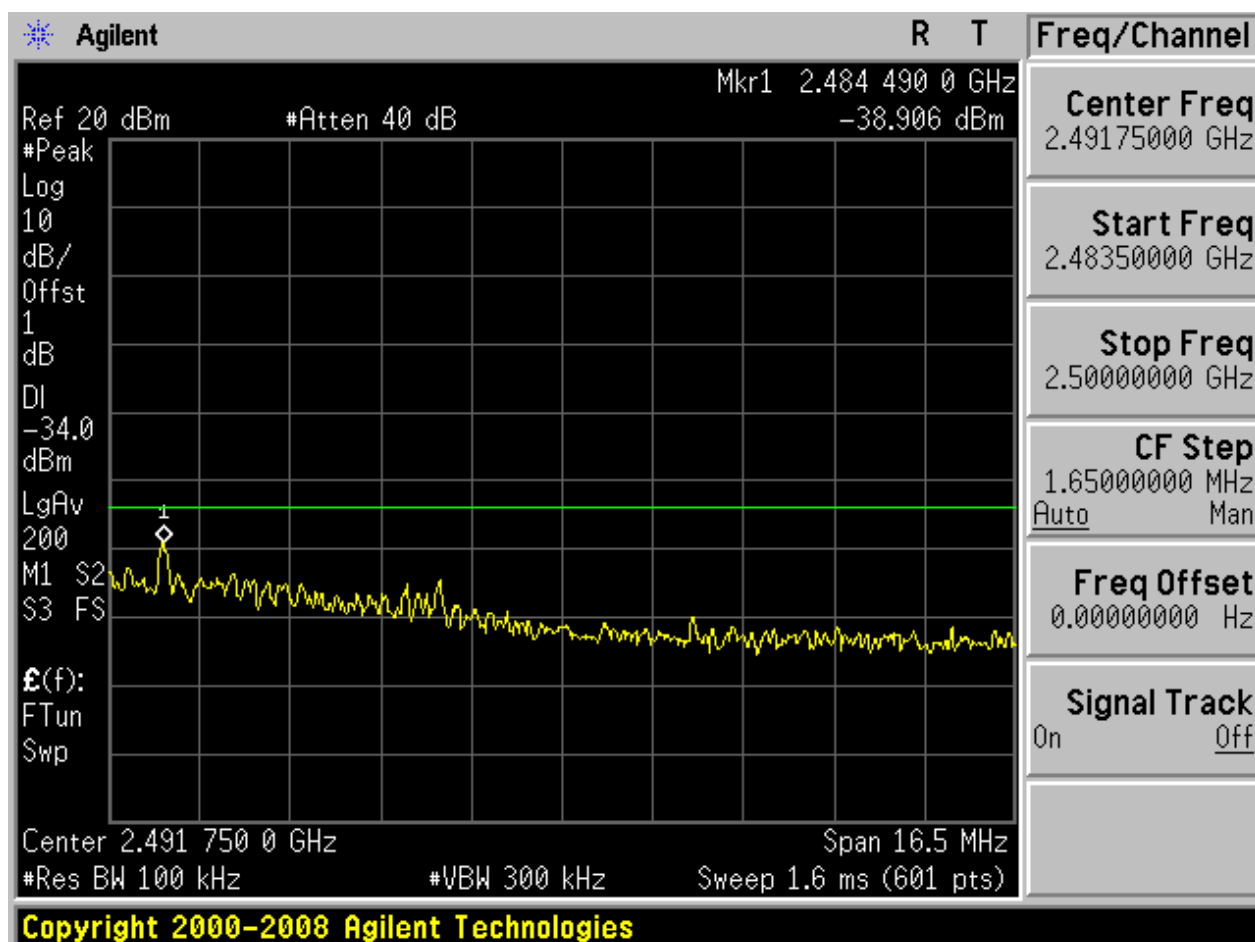

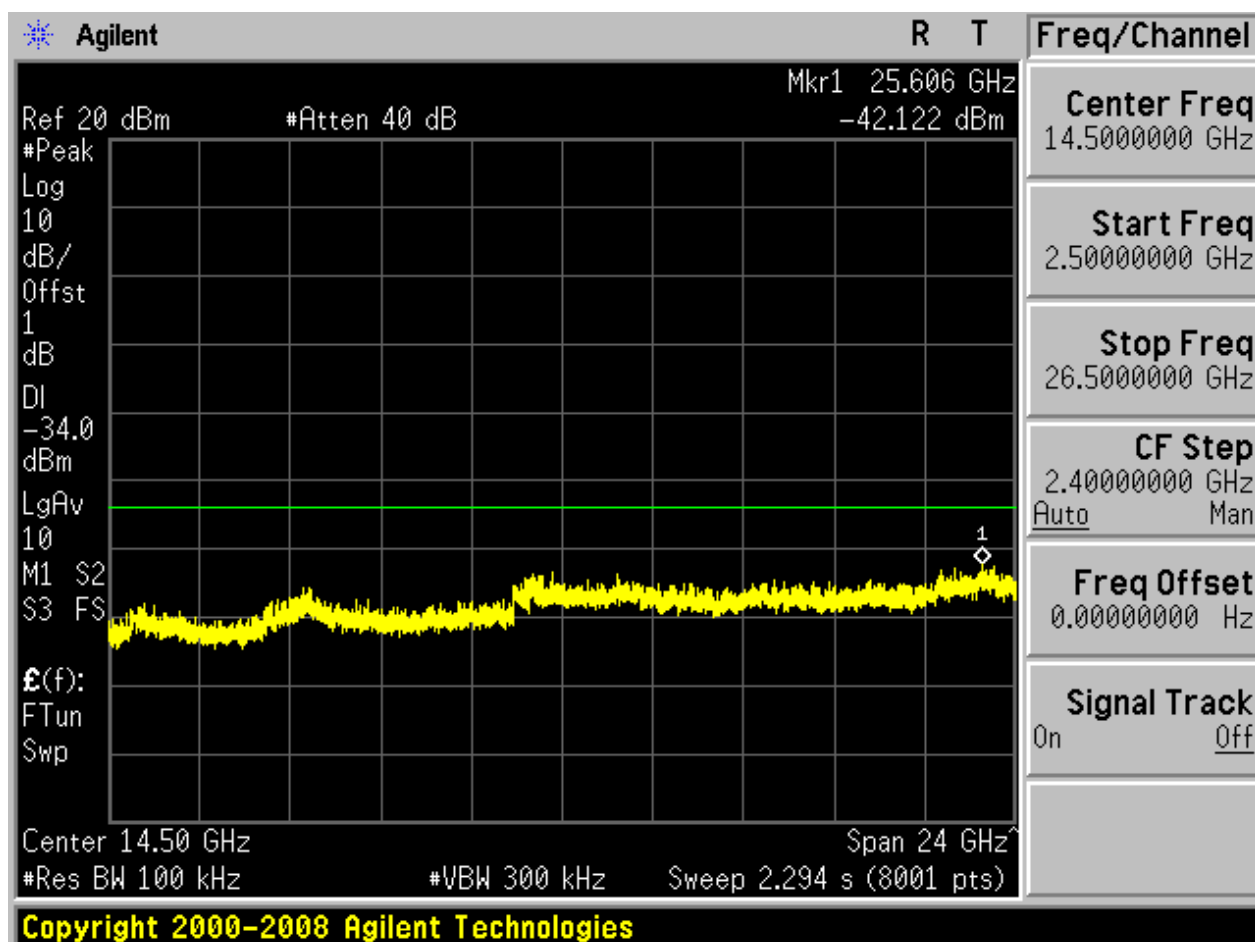



2.24 11N40_H@Ant 2


Pref:

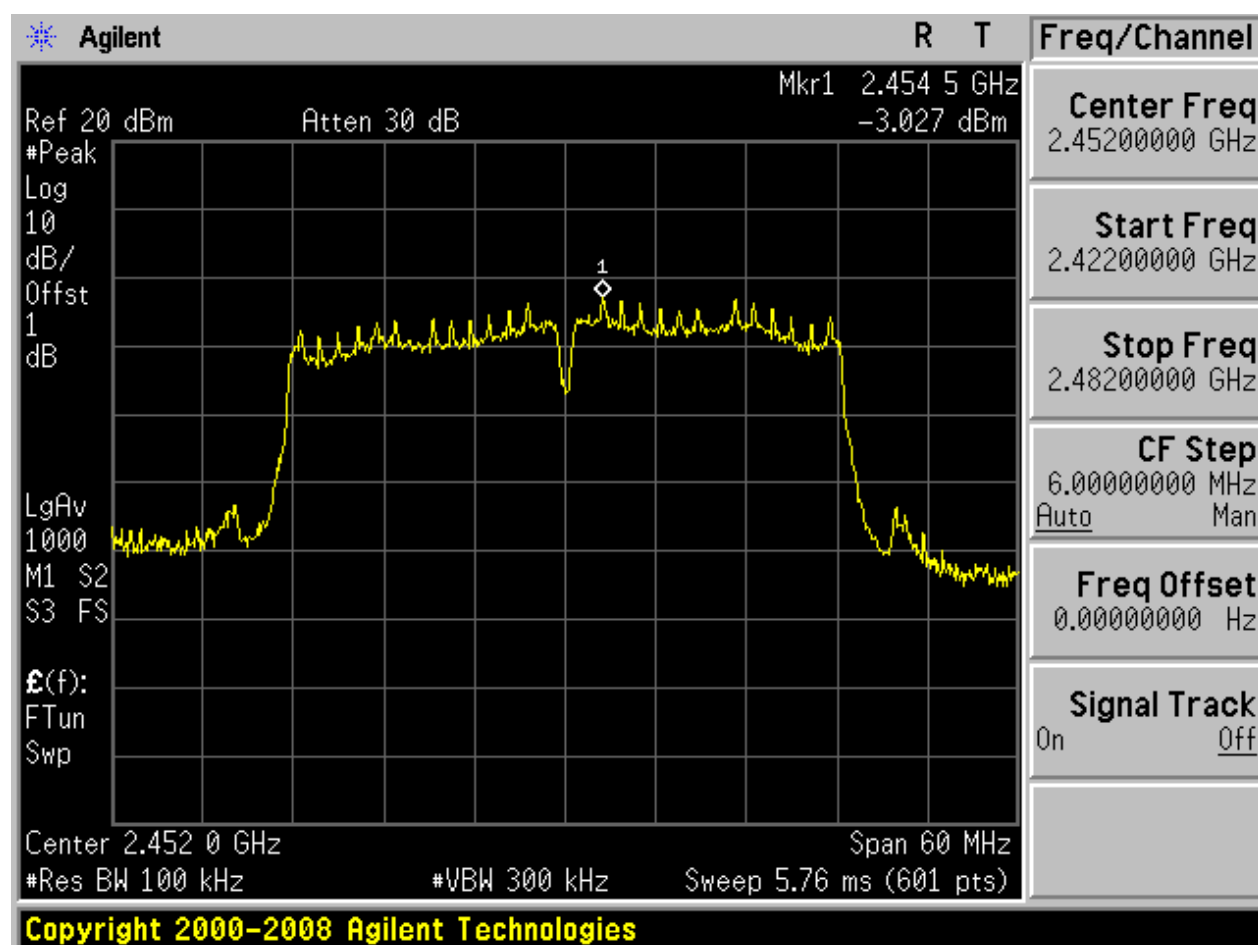



Puw:

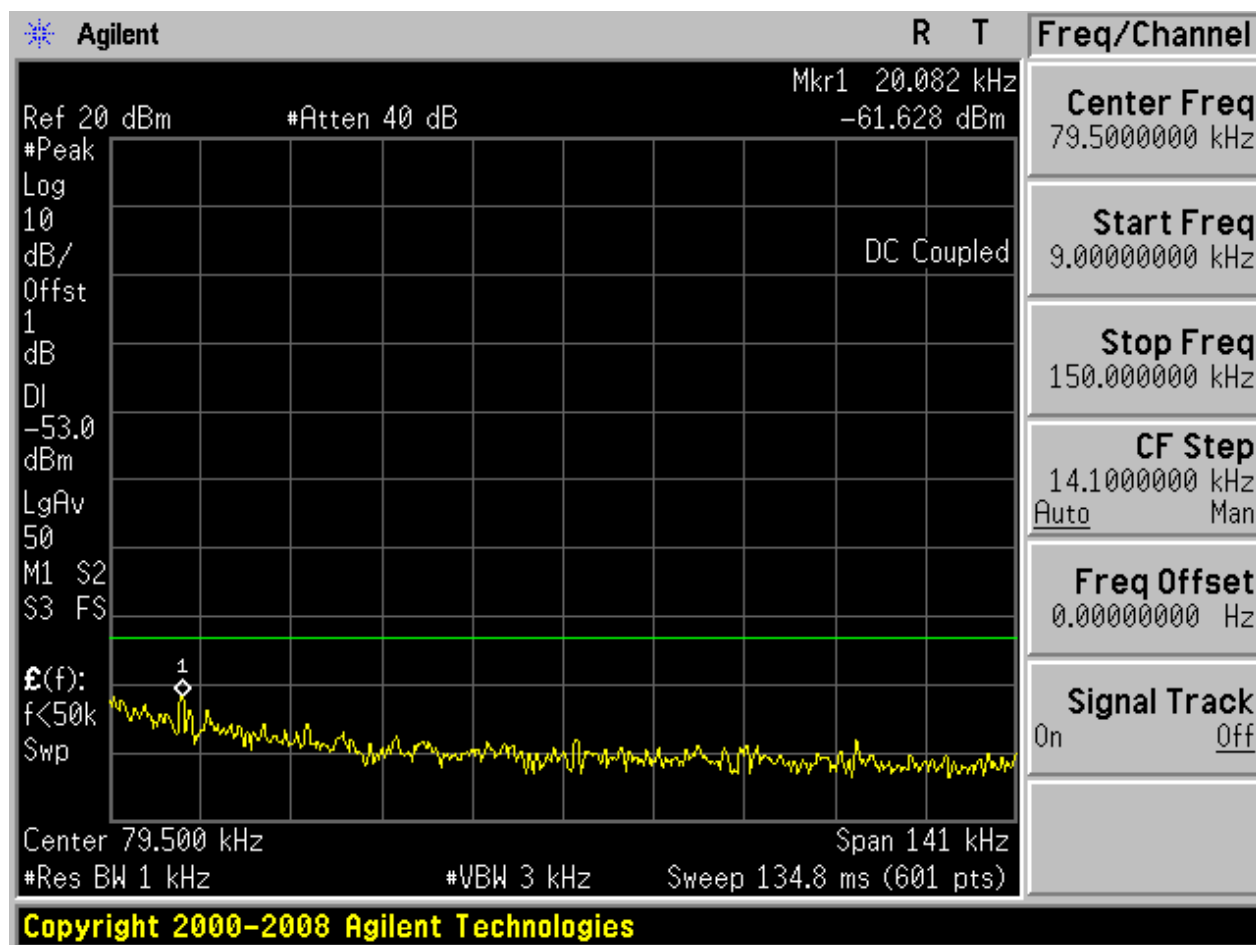


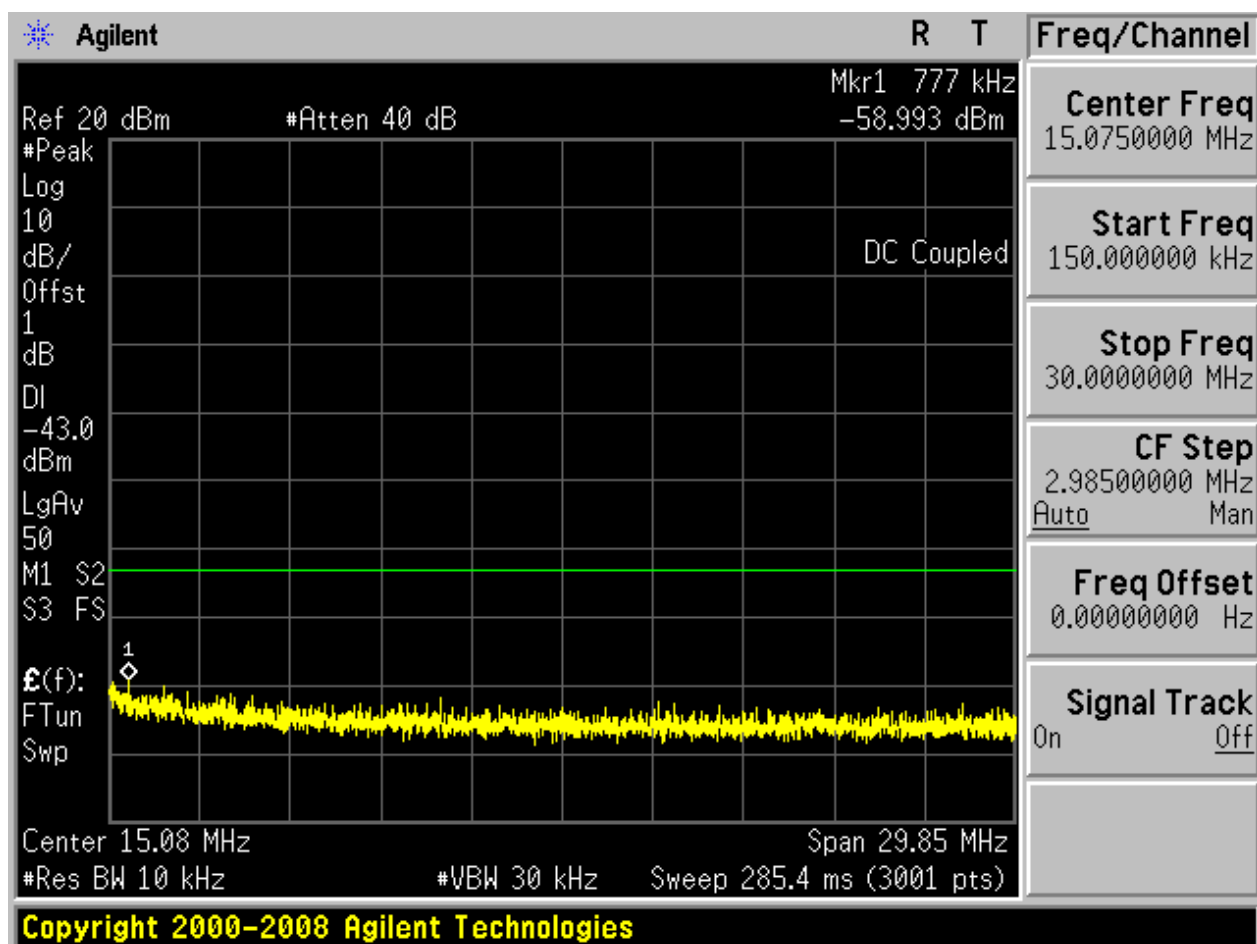

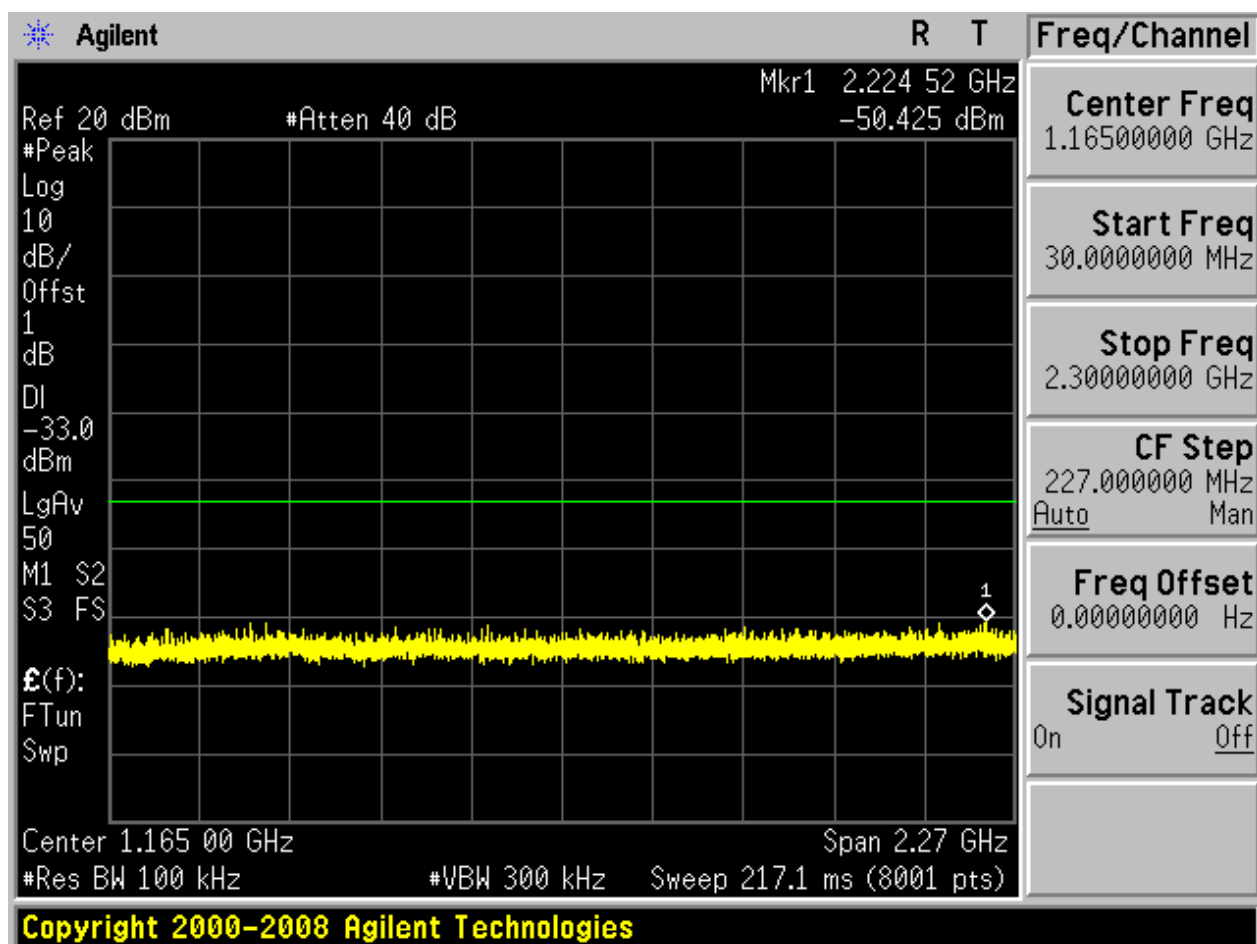

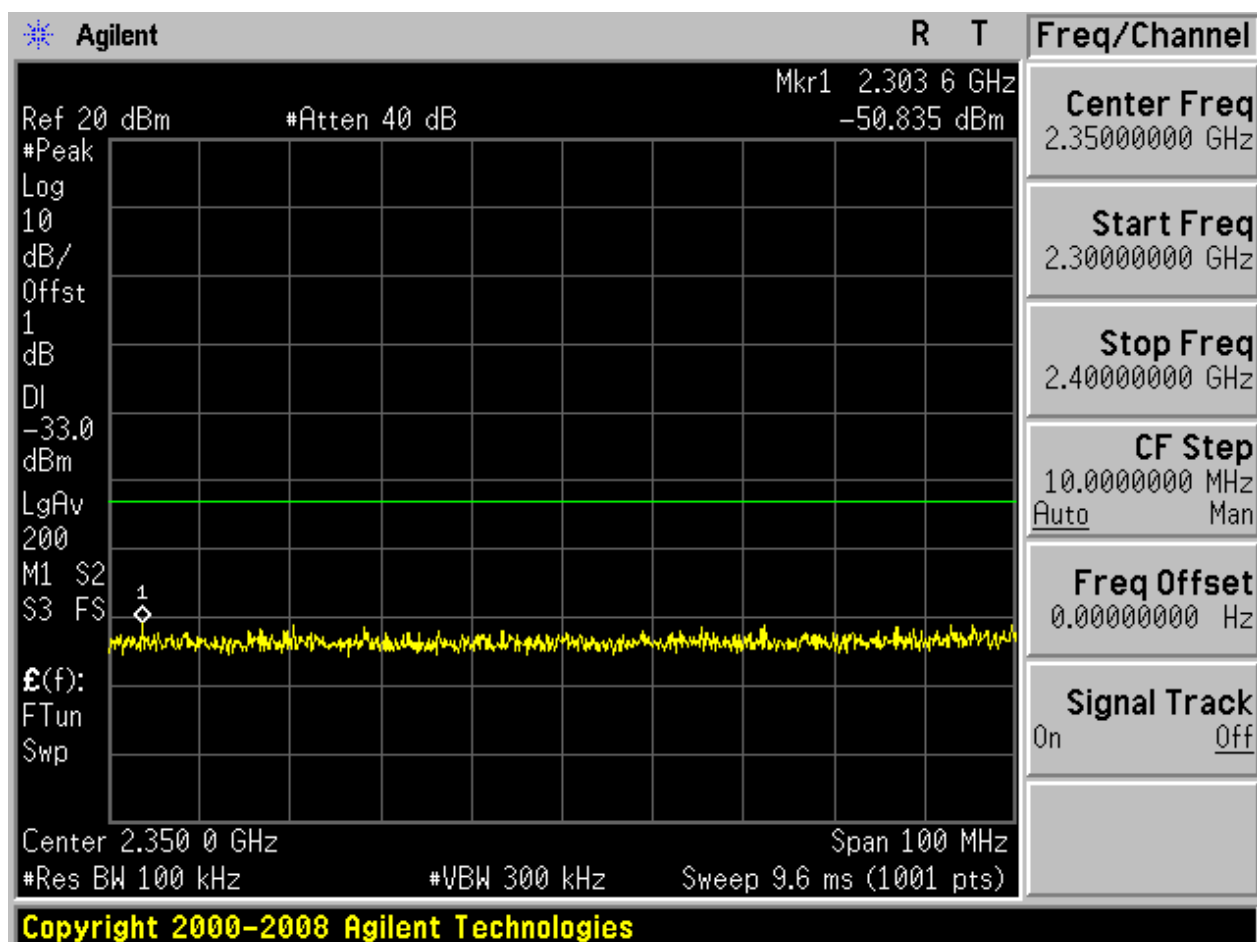


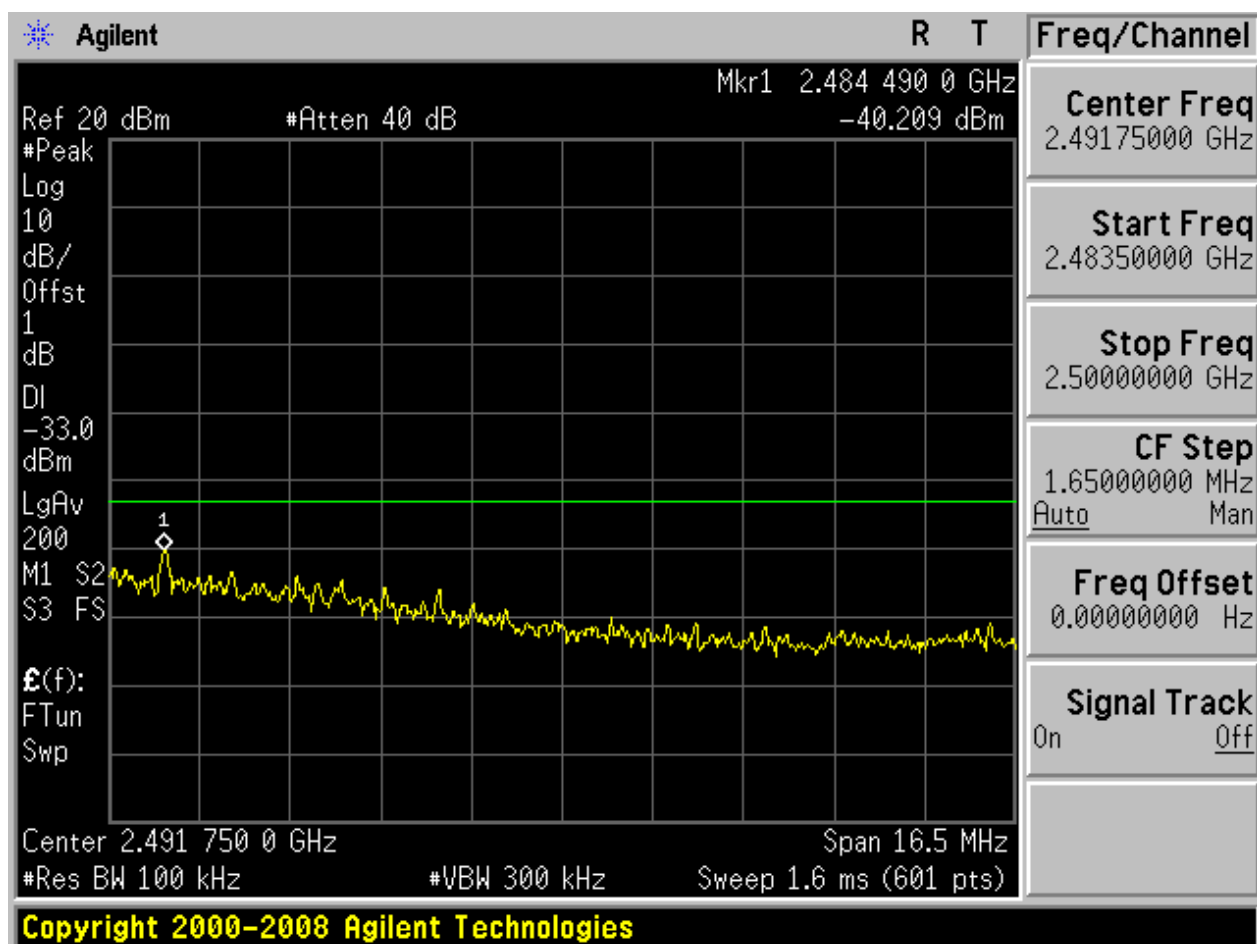

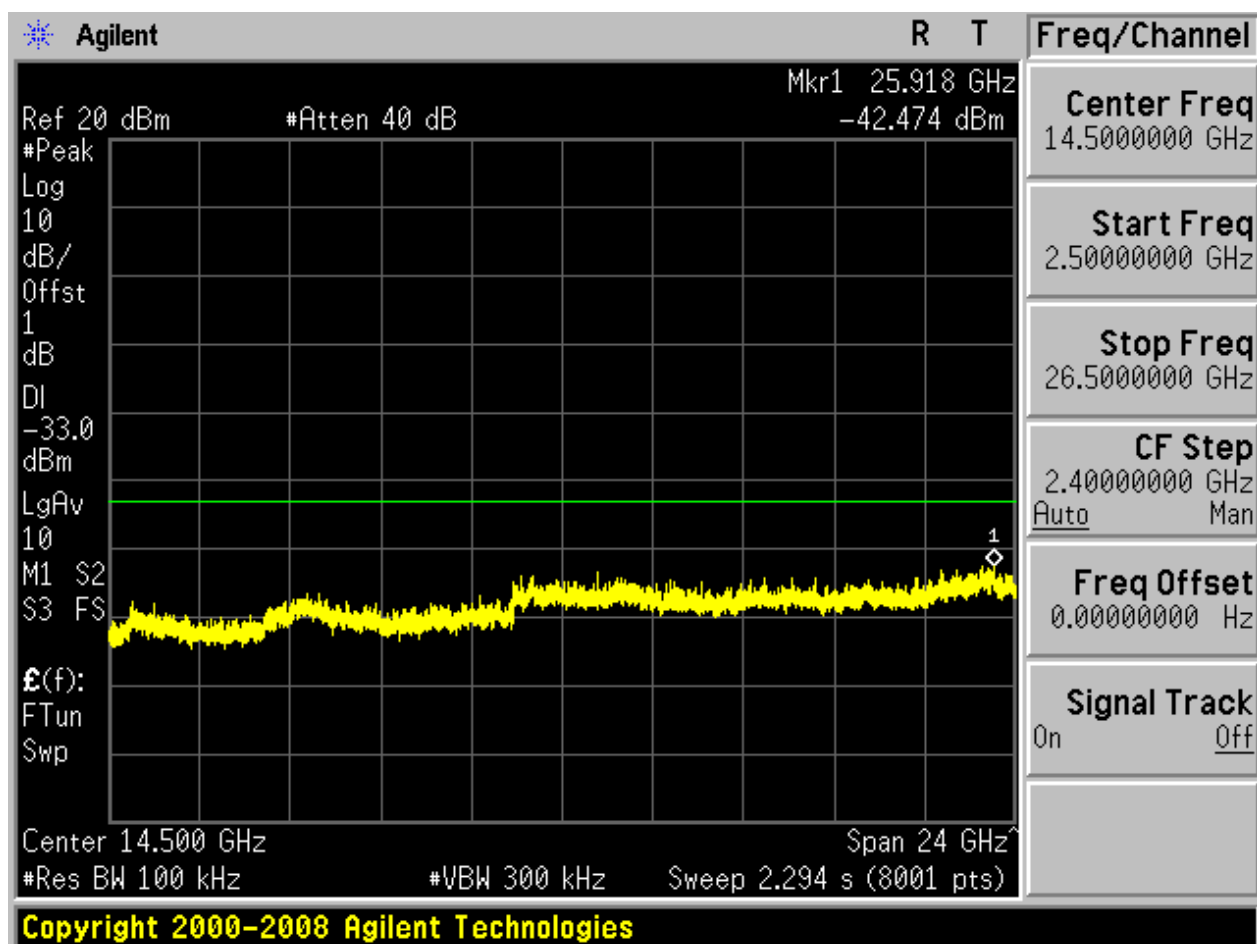


2.31 11N40m_L@Ant 1


Pref:

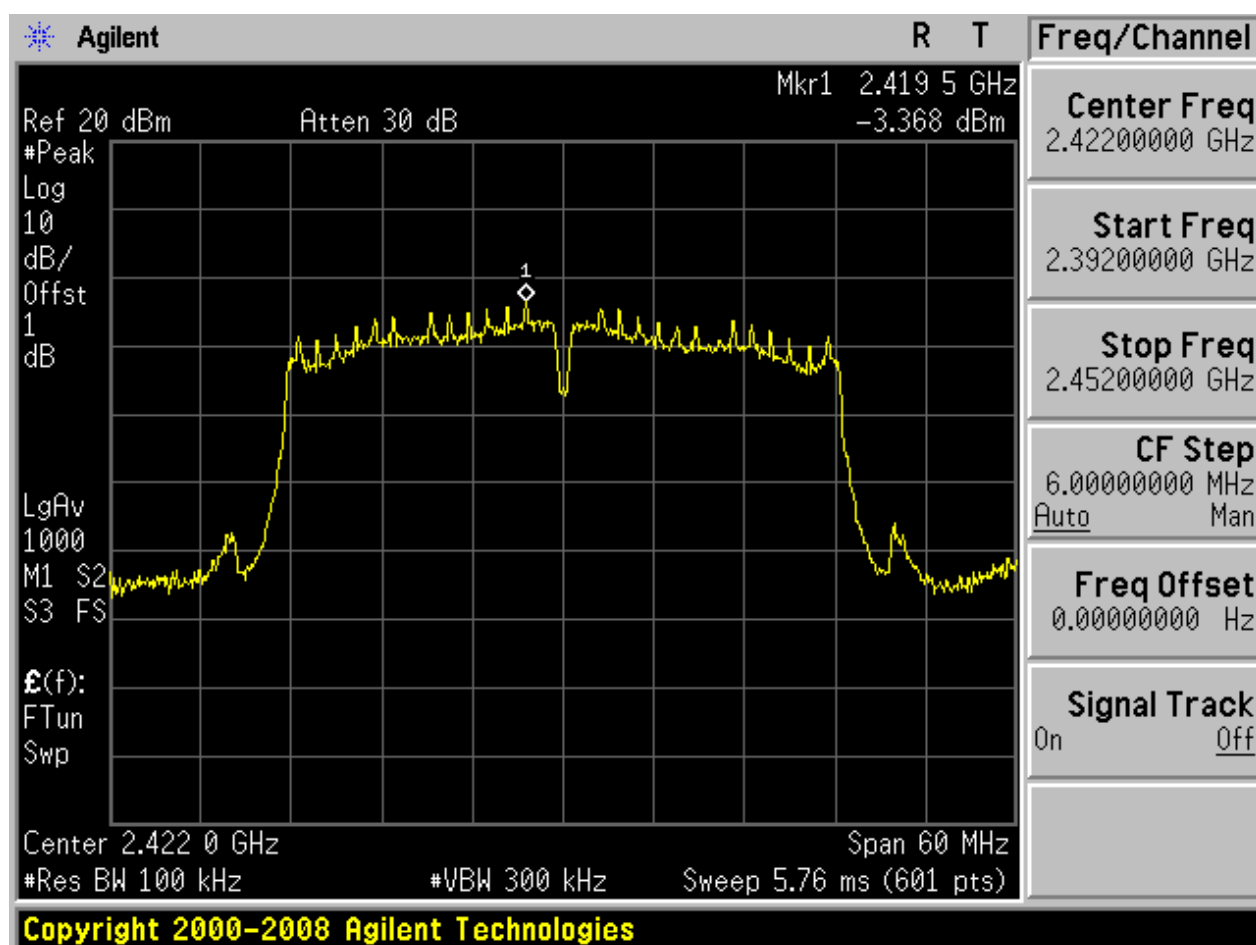






Puw:

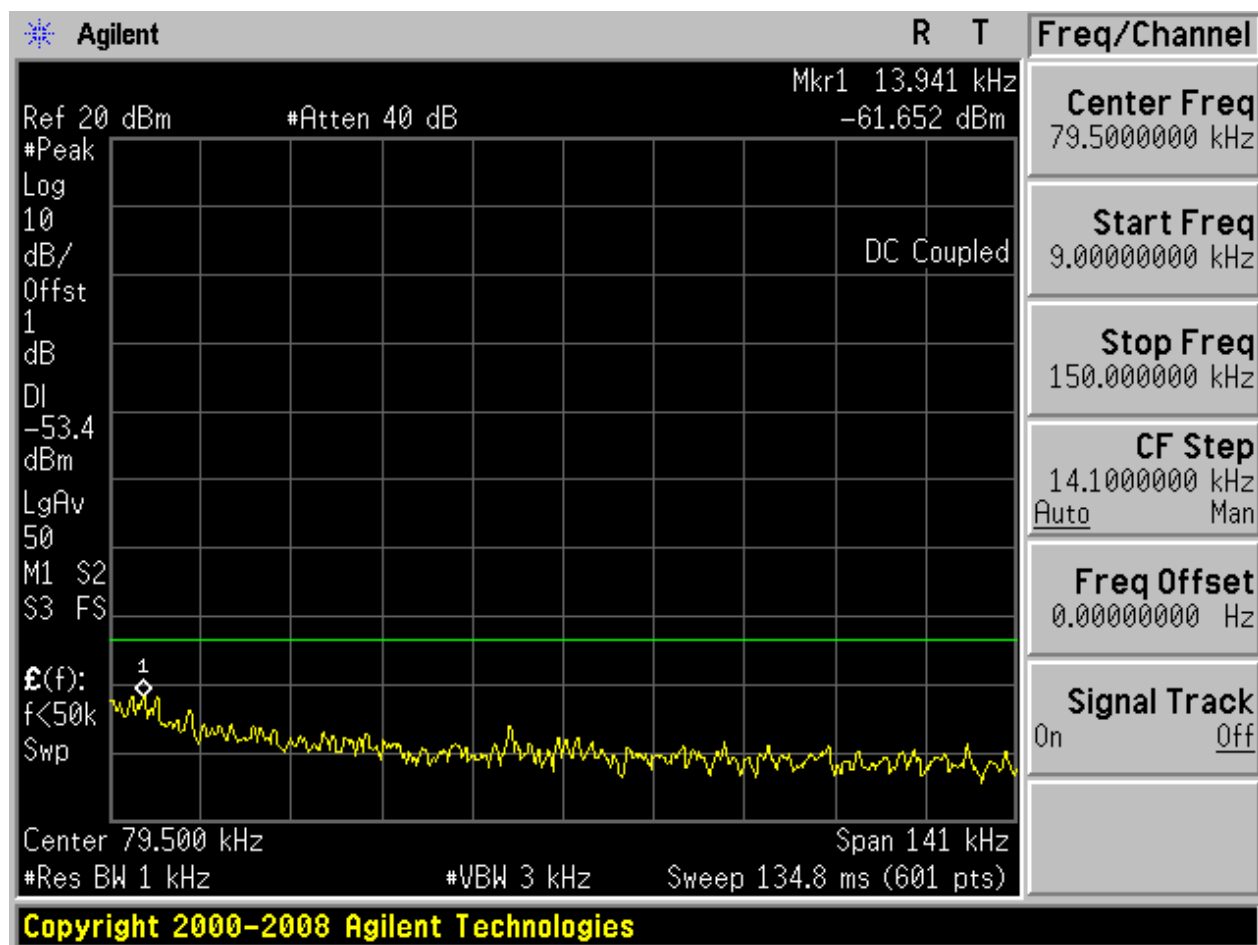


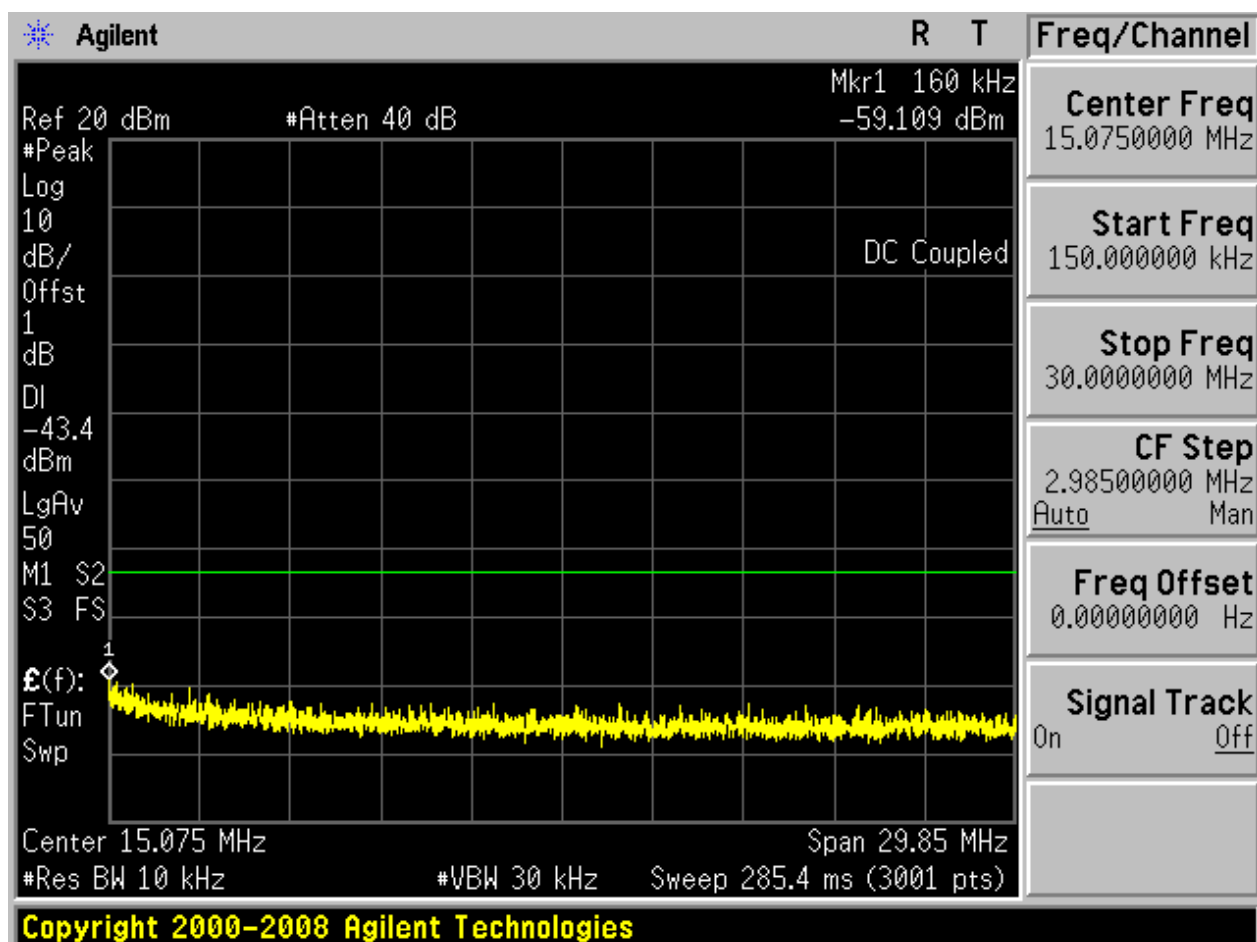

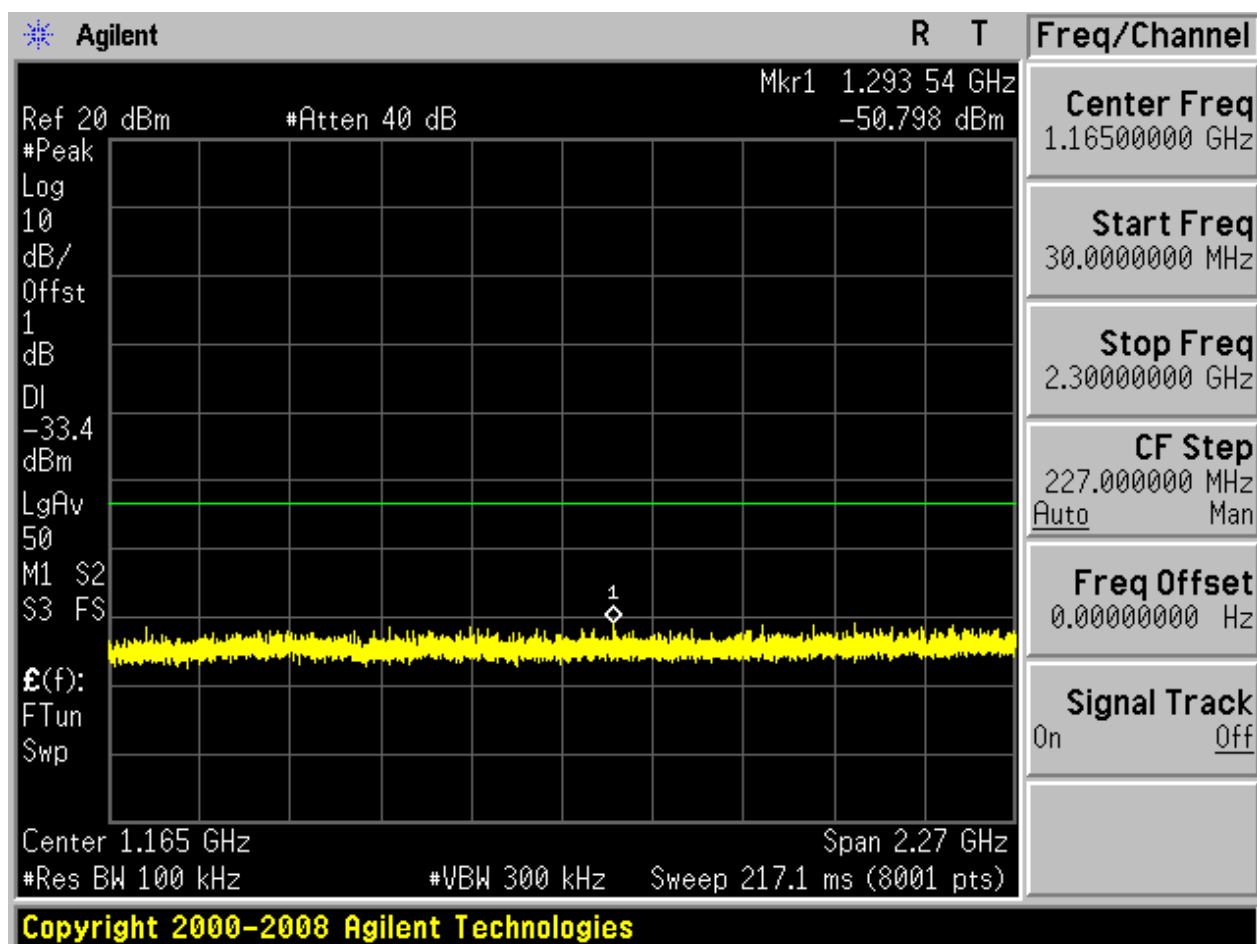

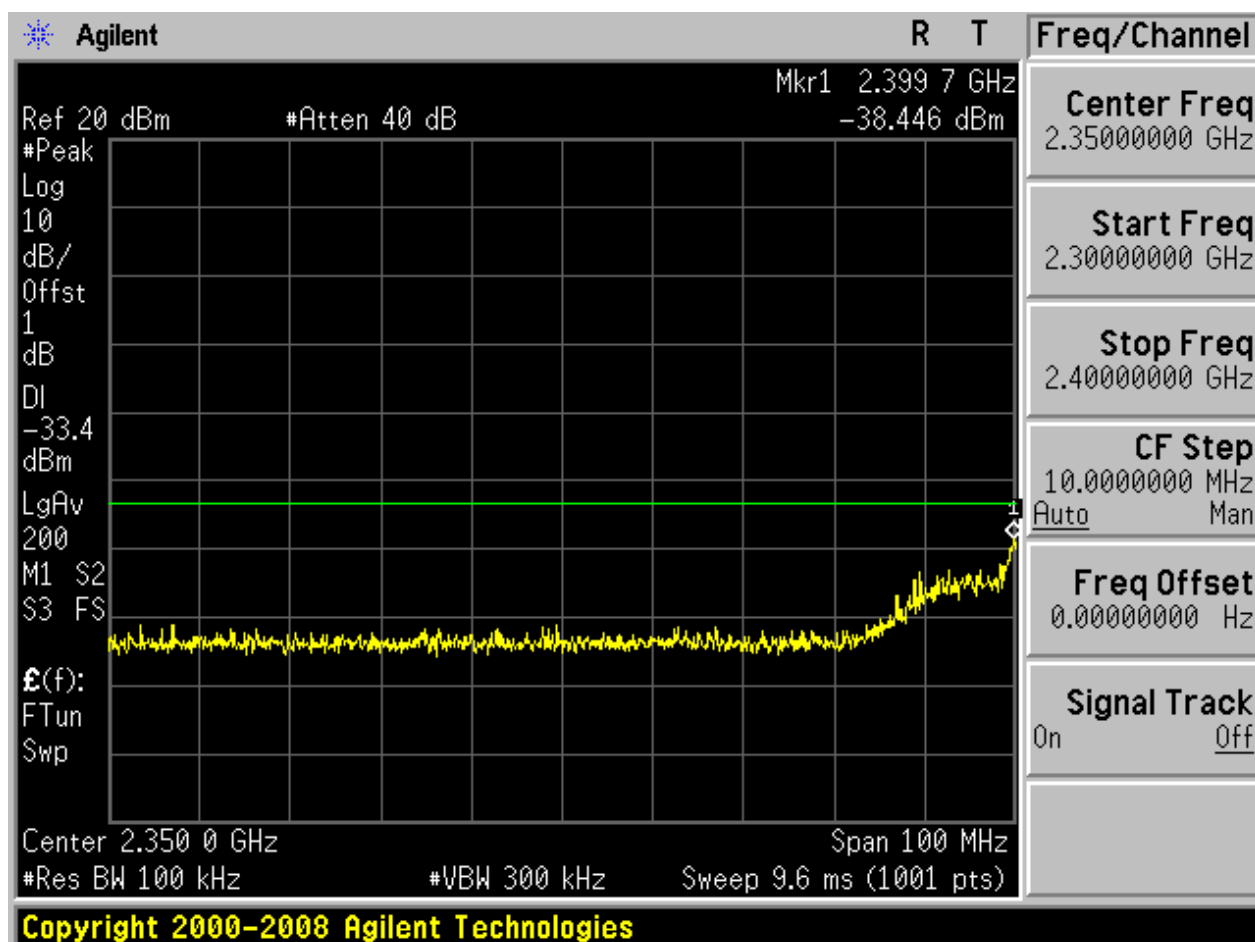


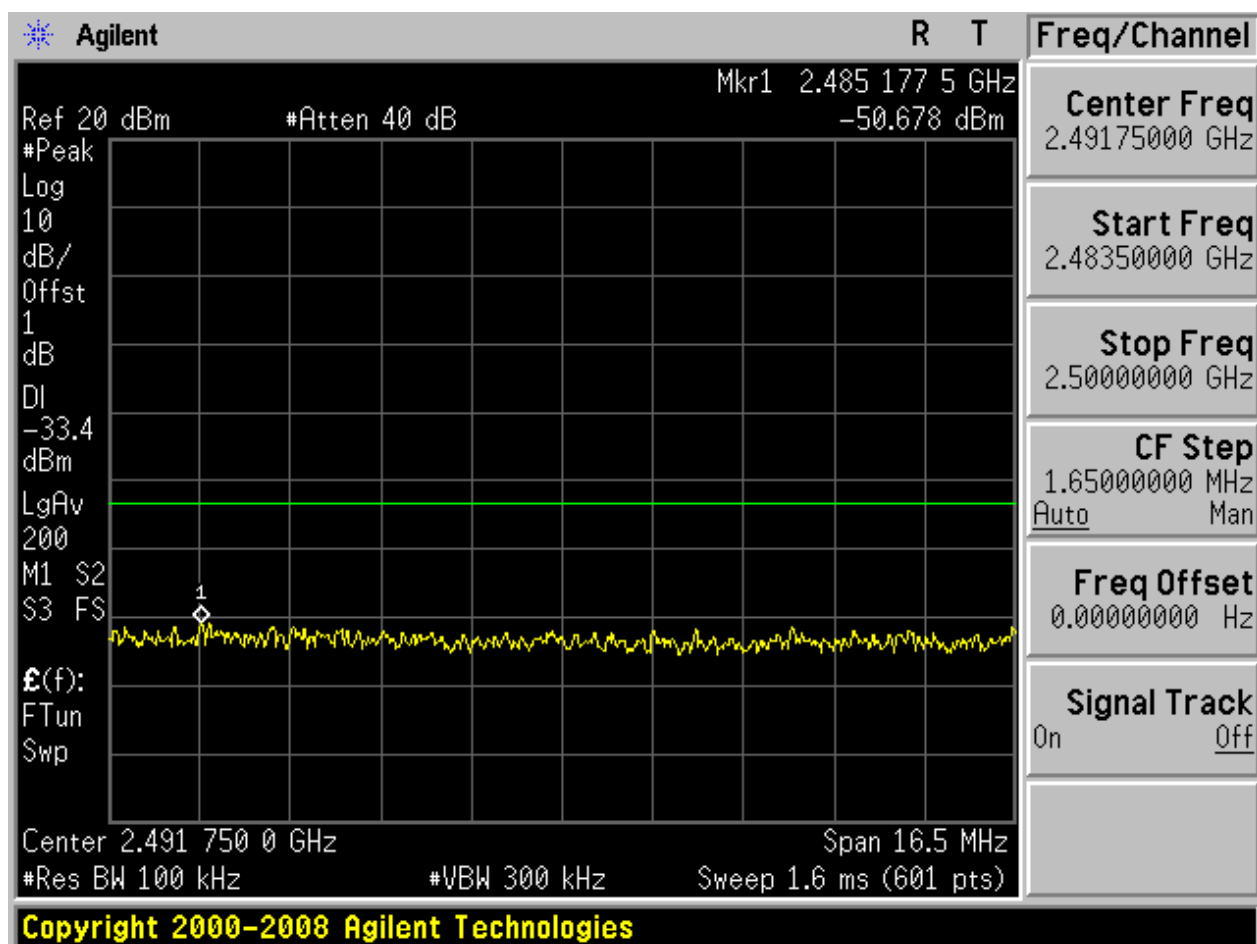

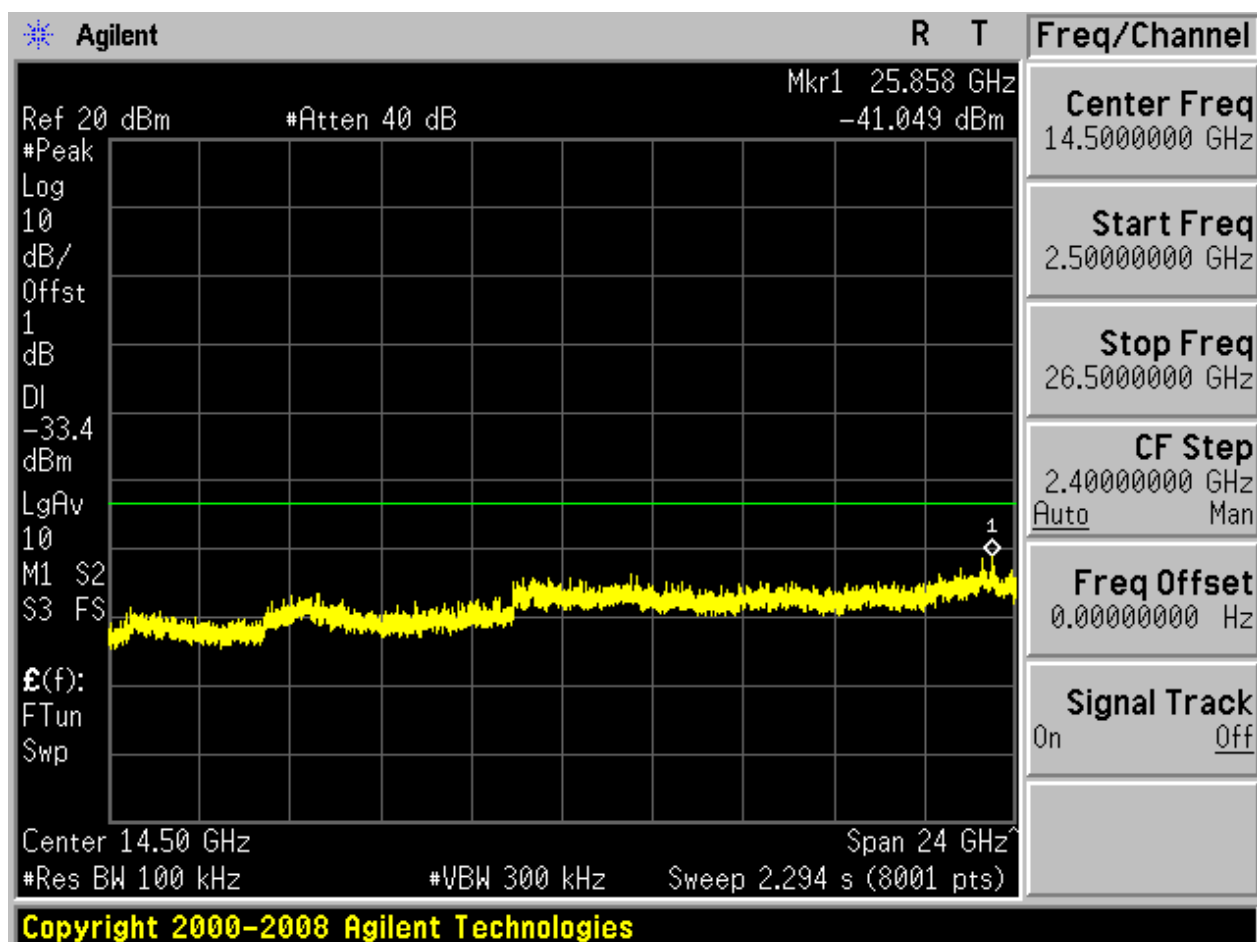


2.32 11N40m_L@Ant 2


Pref:

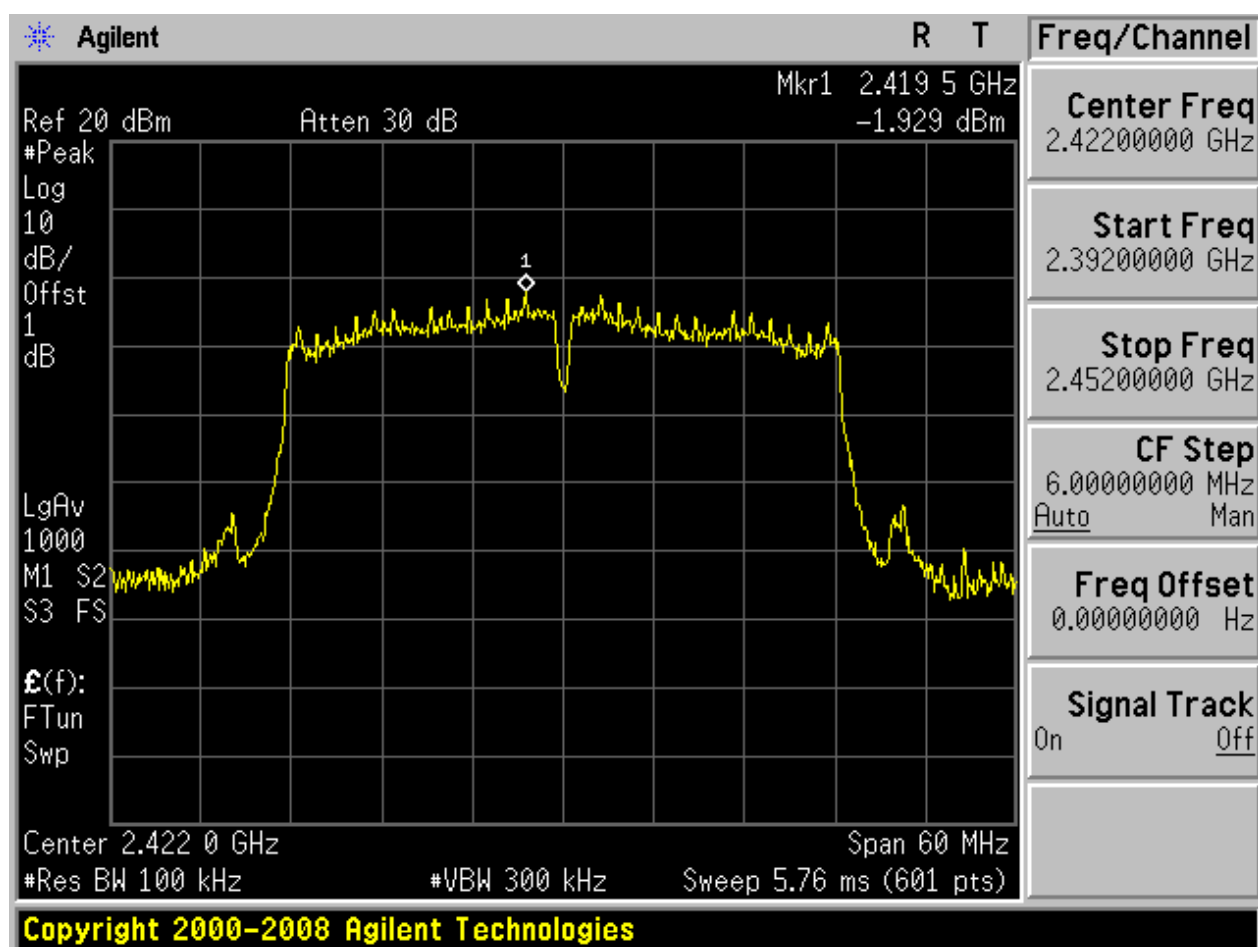






Puw:

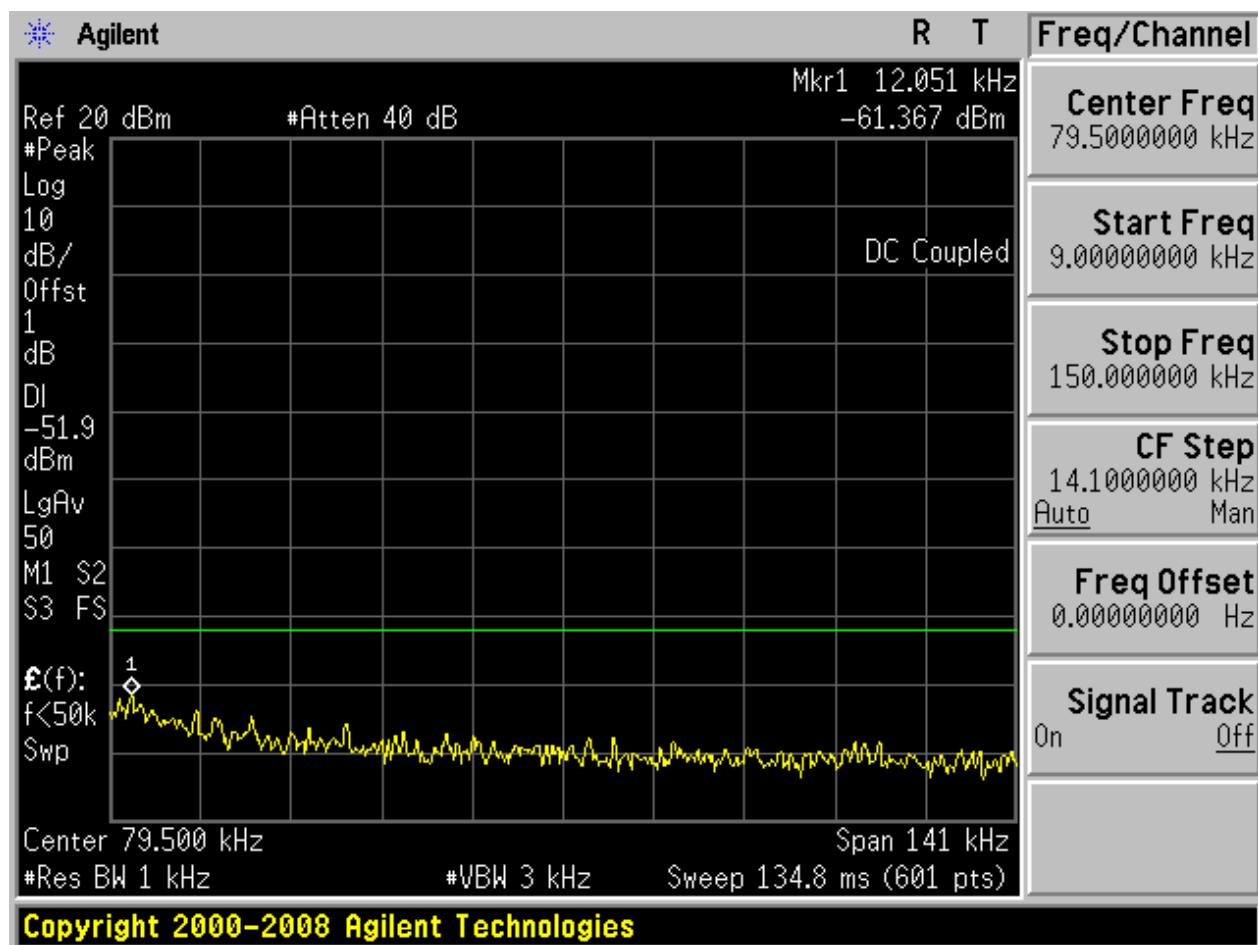


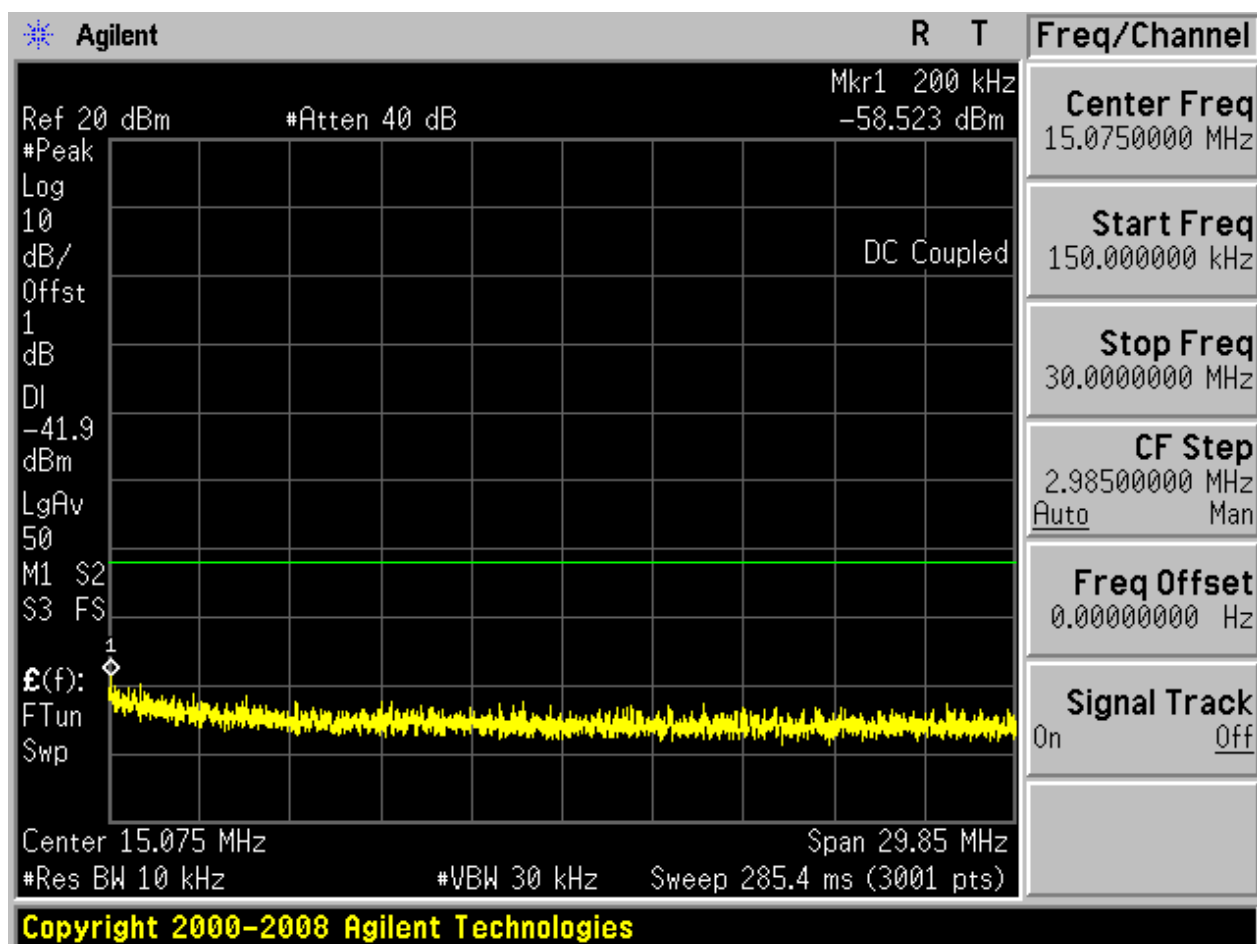

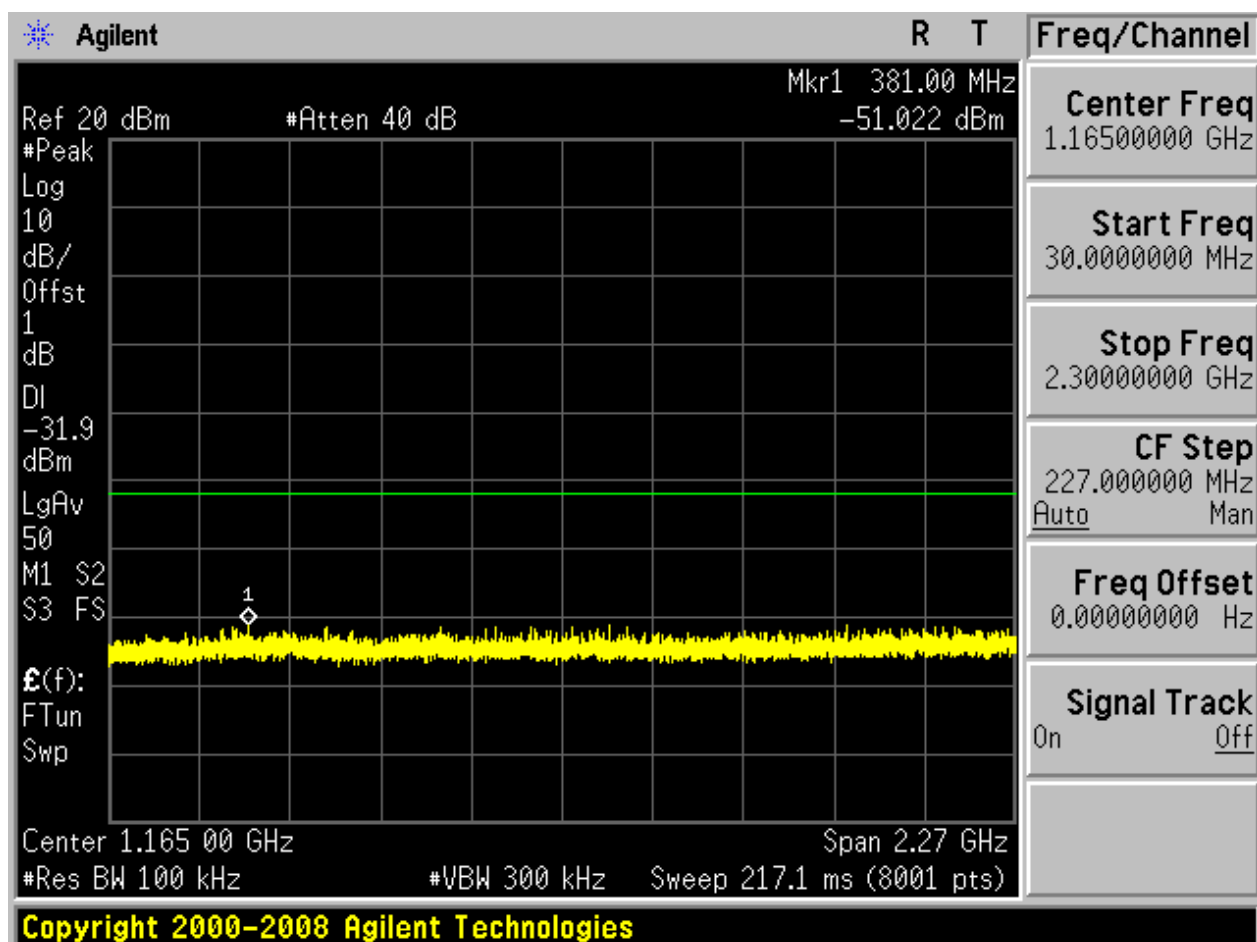

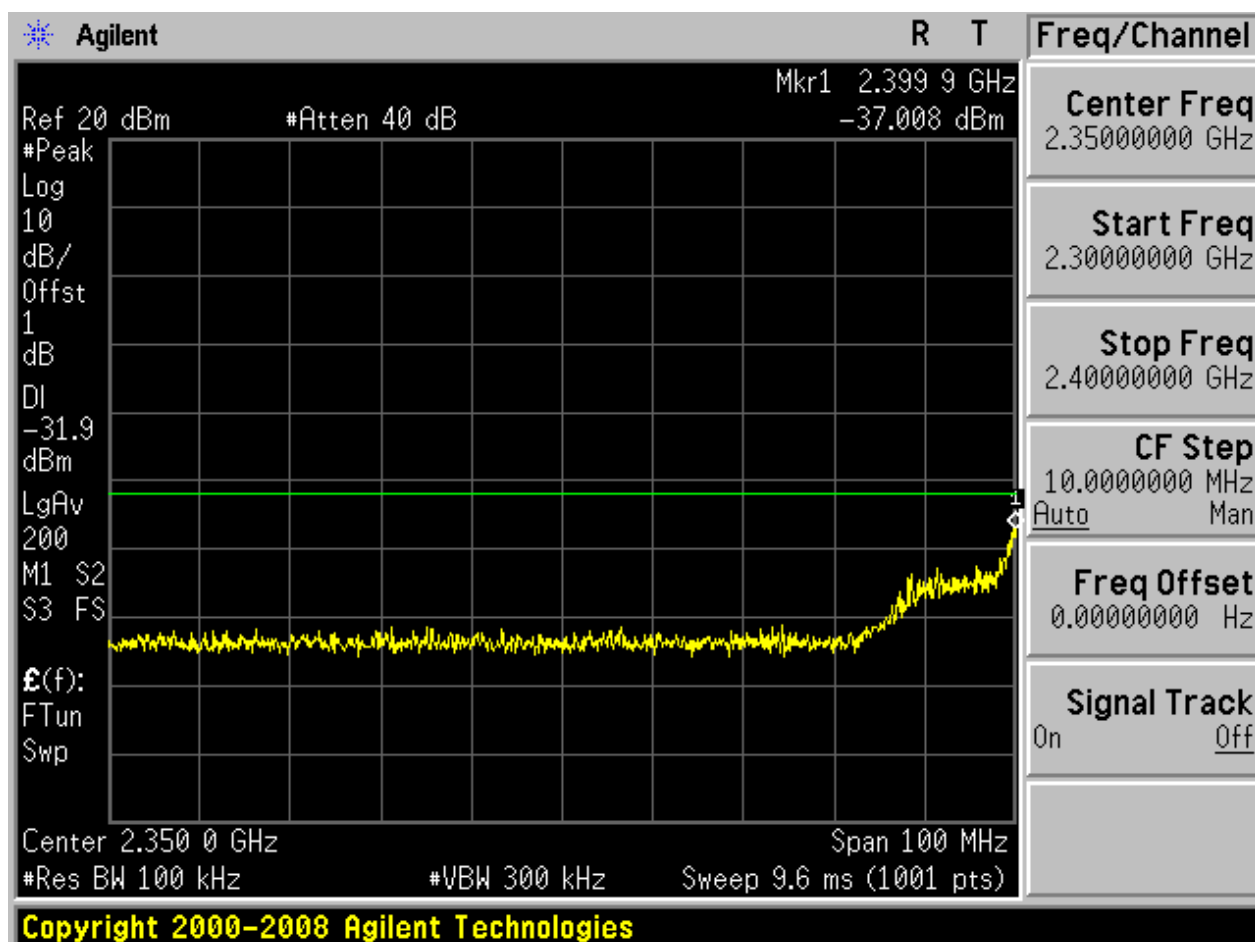


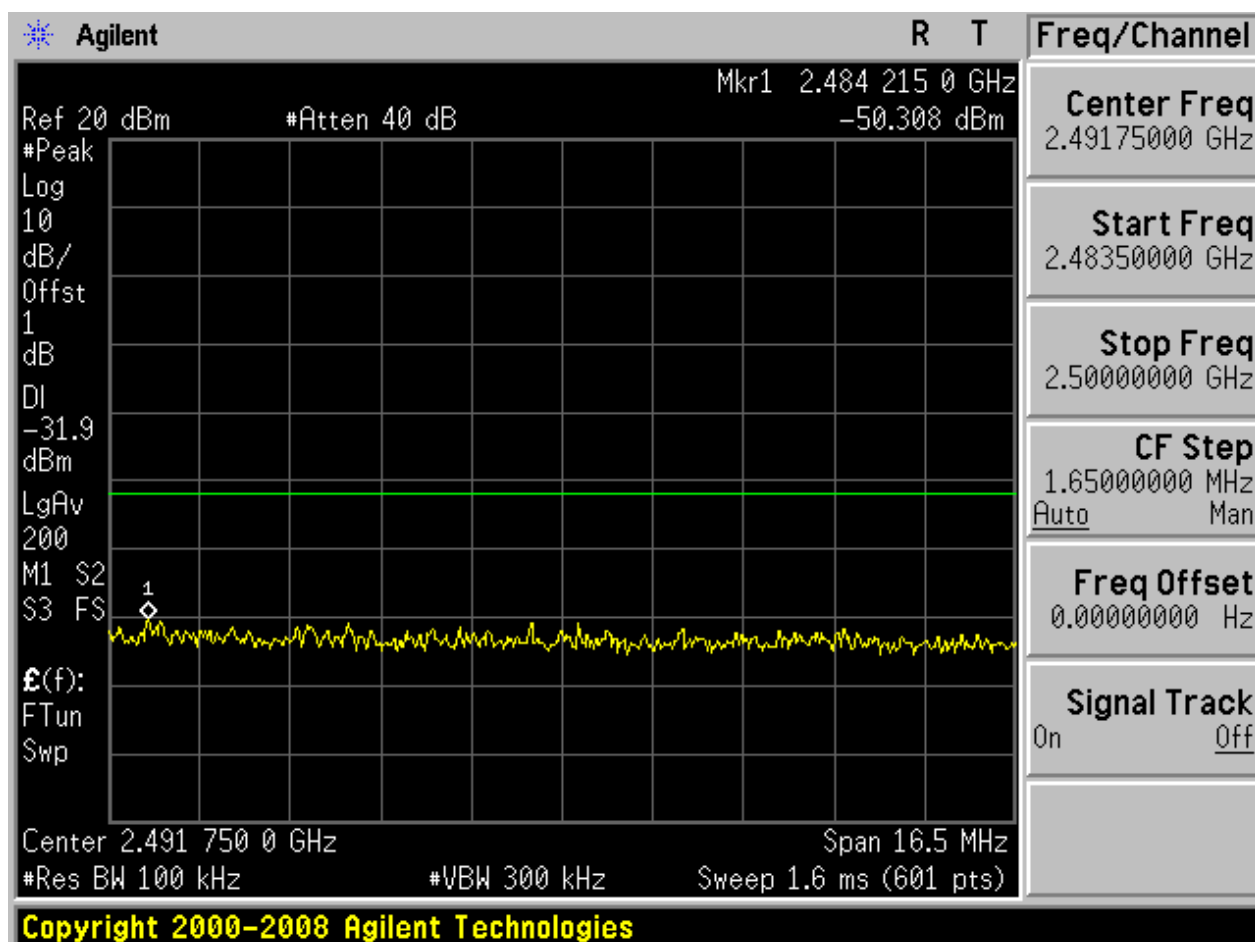

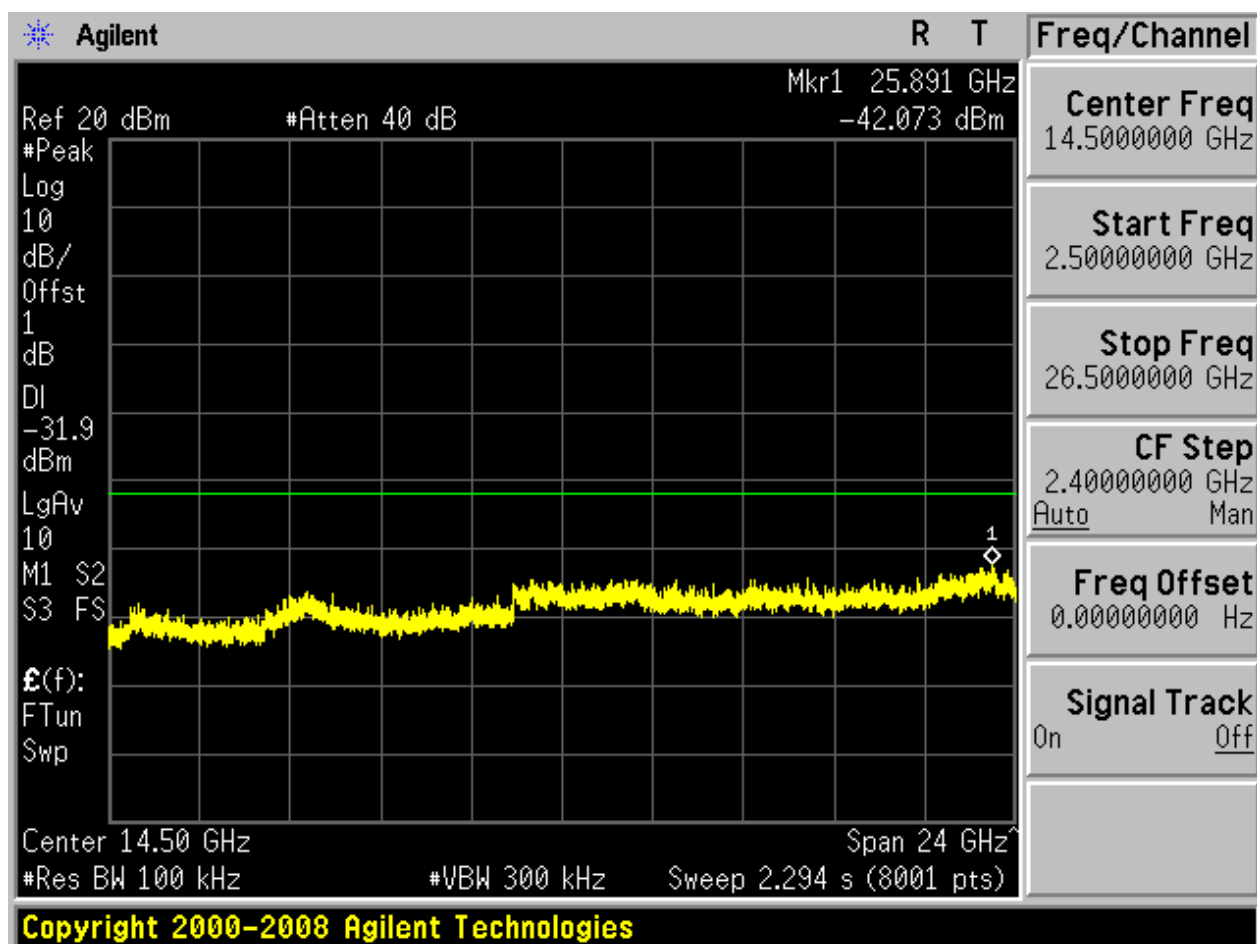


2.33 11N40m_M@Ant 1


Pref:

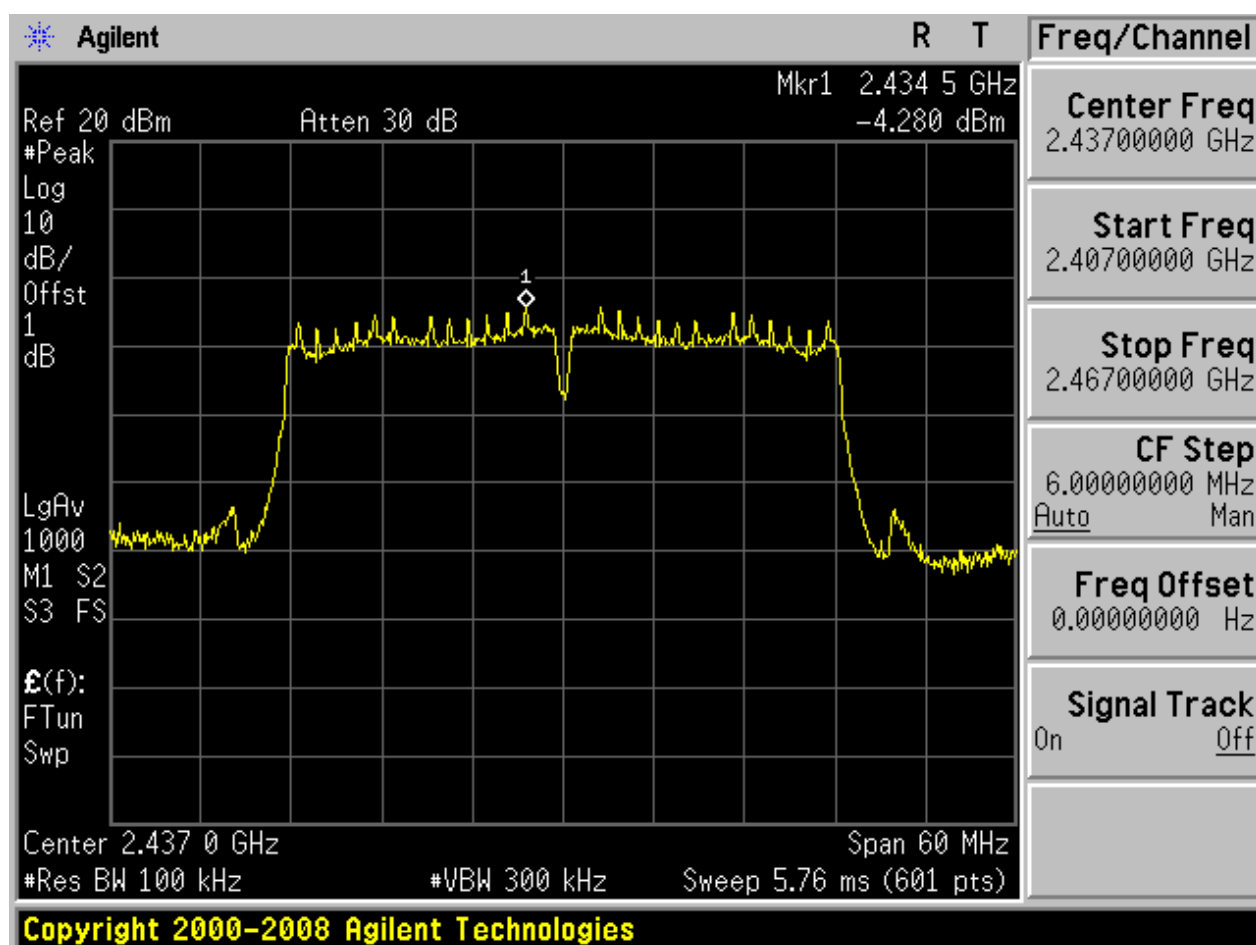






Puw:

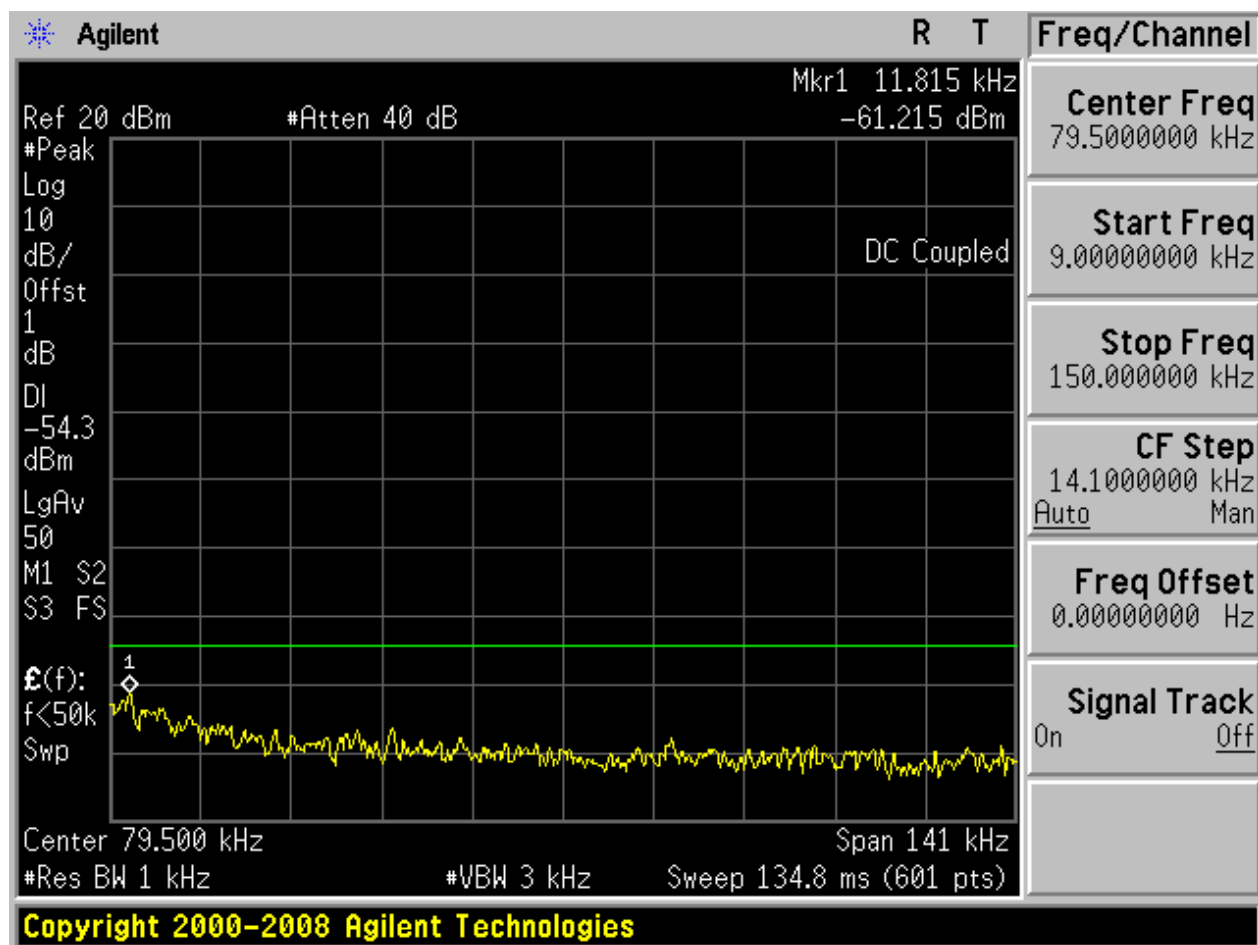


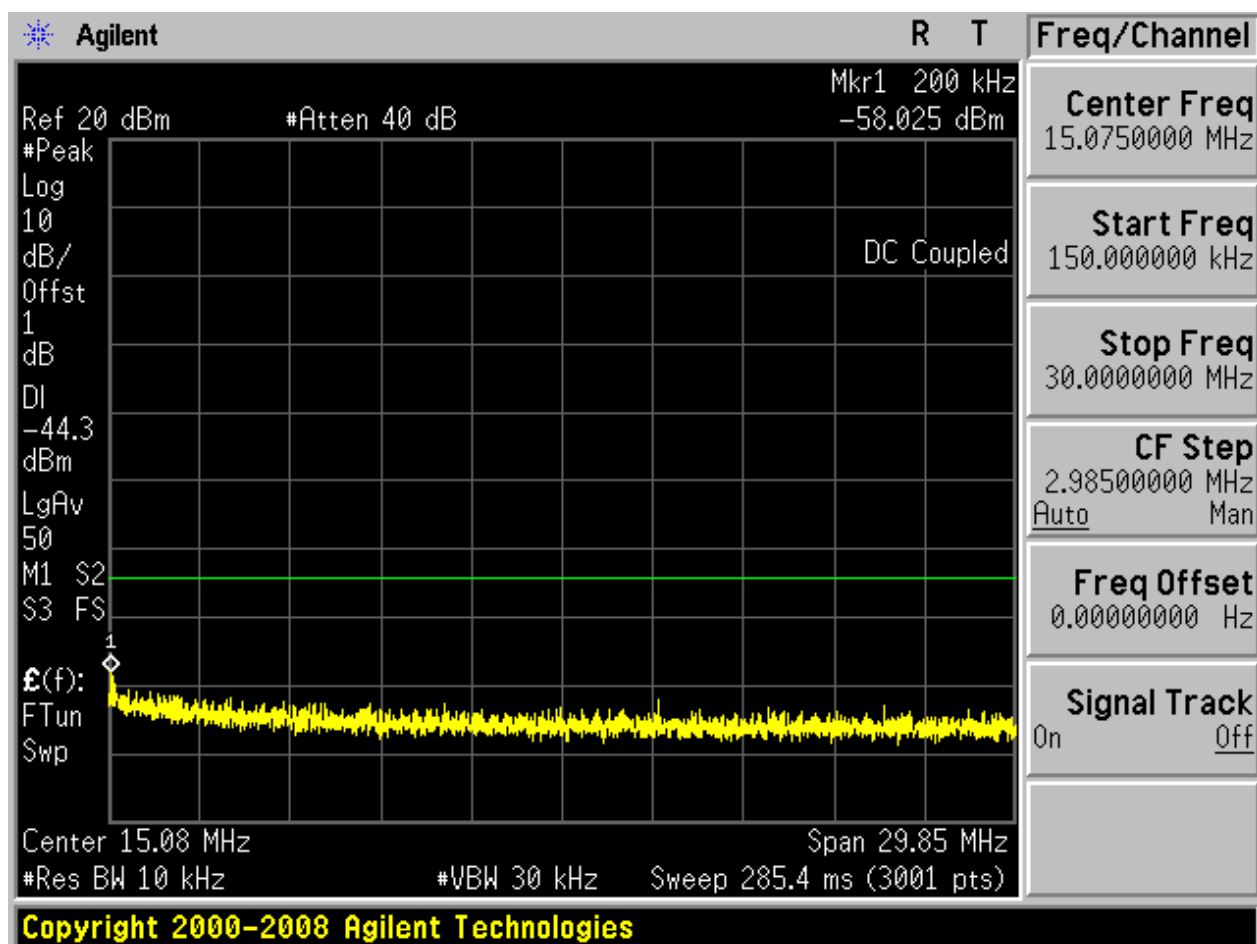

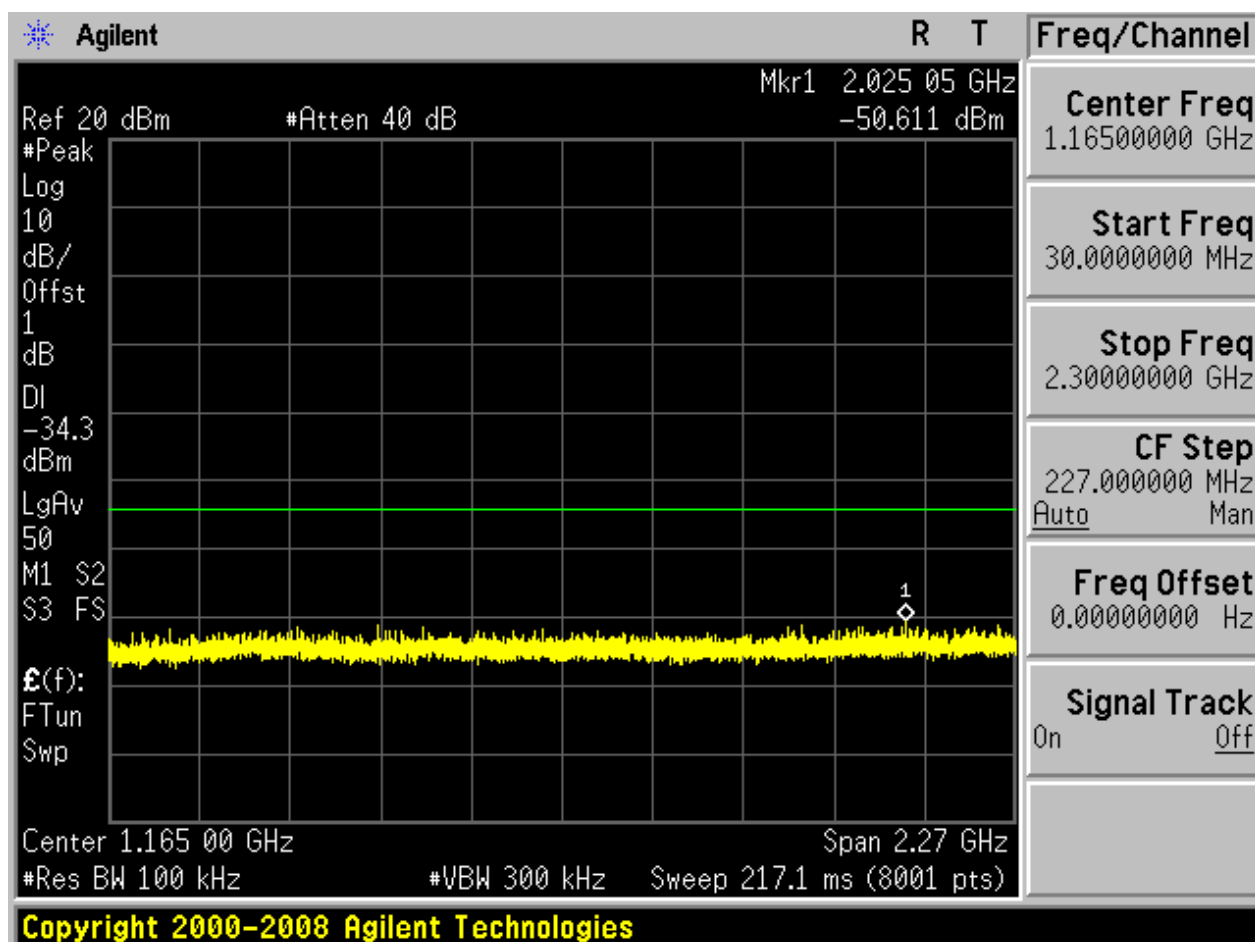

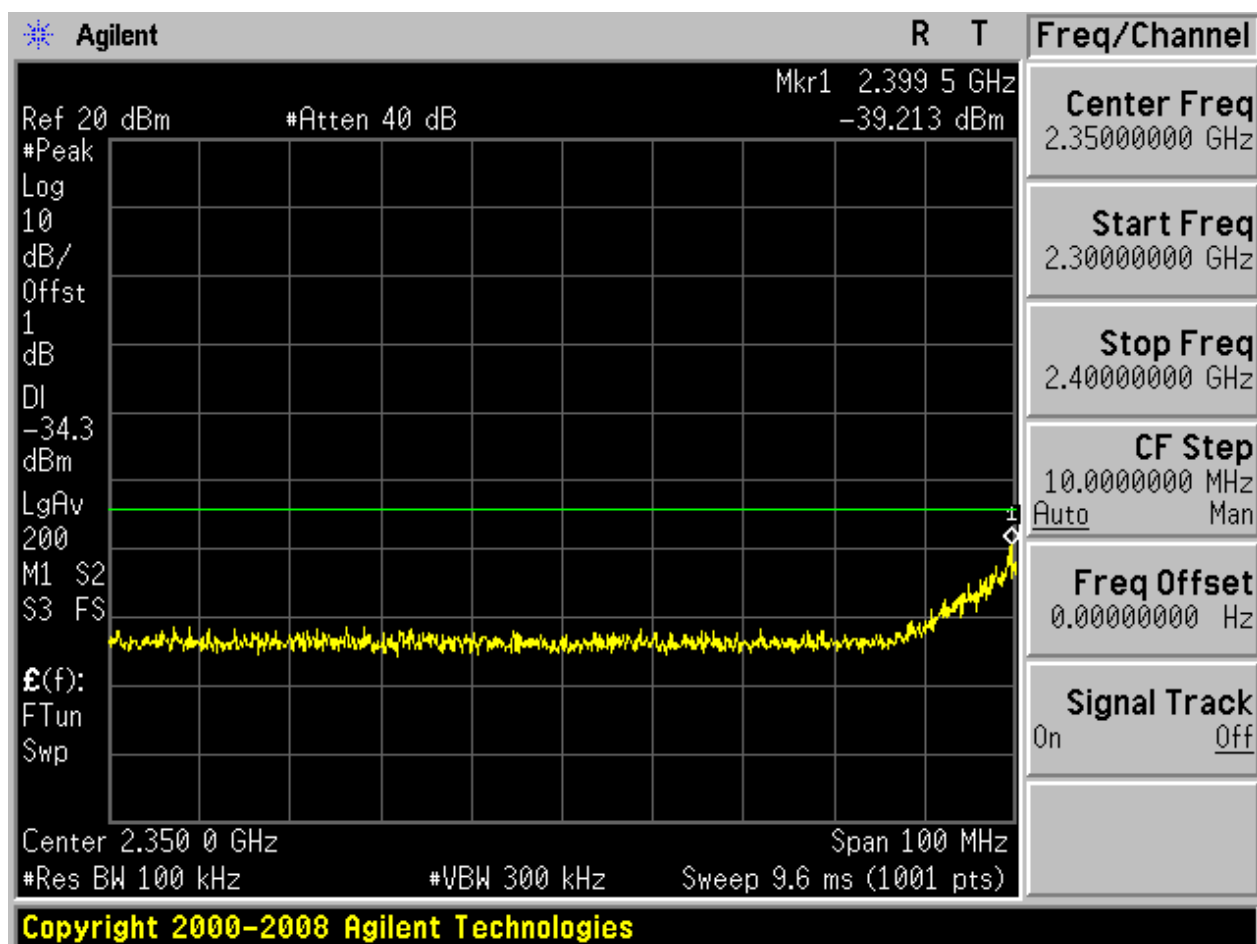


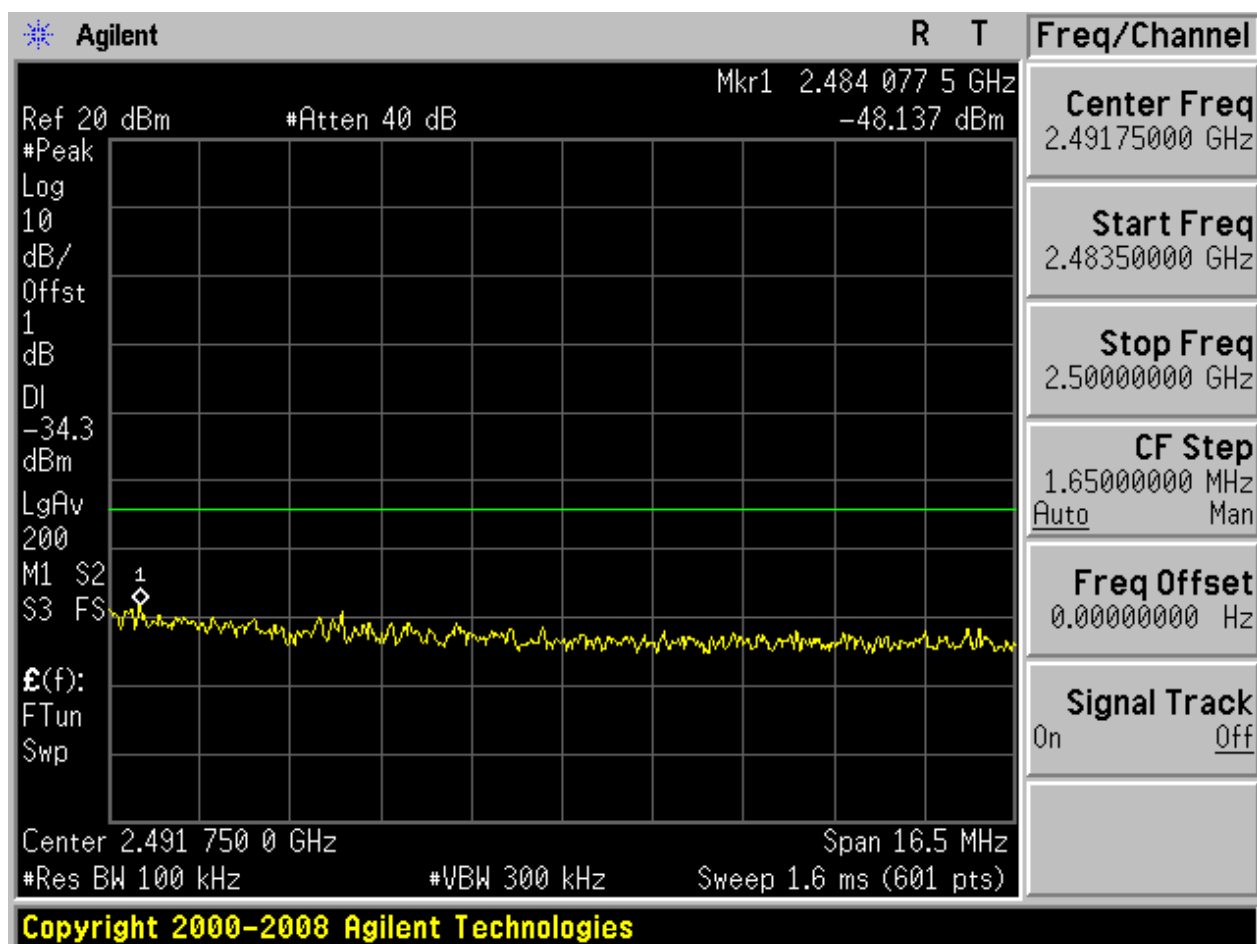

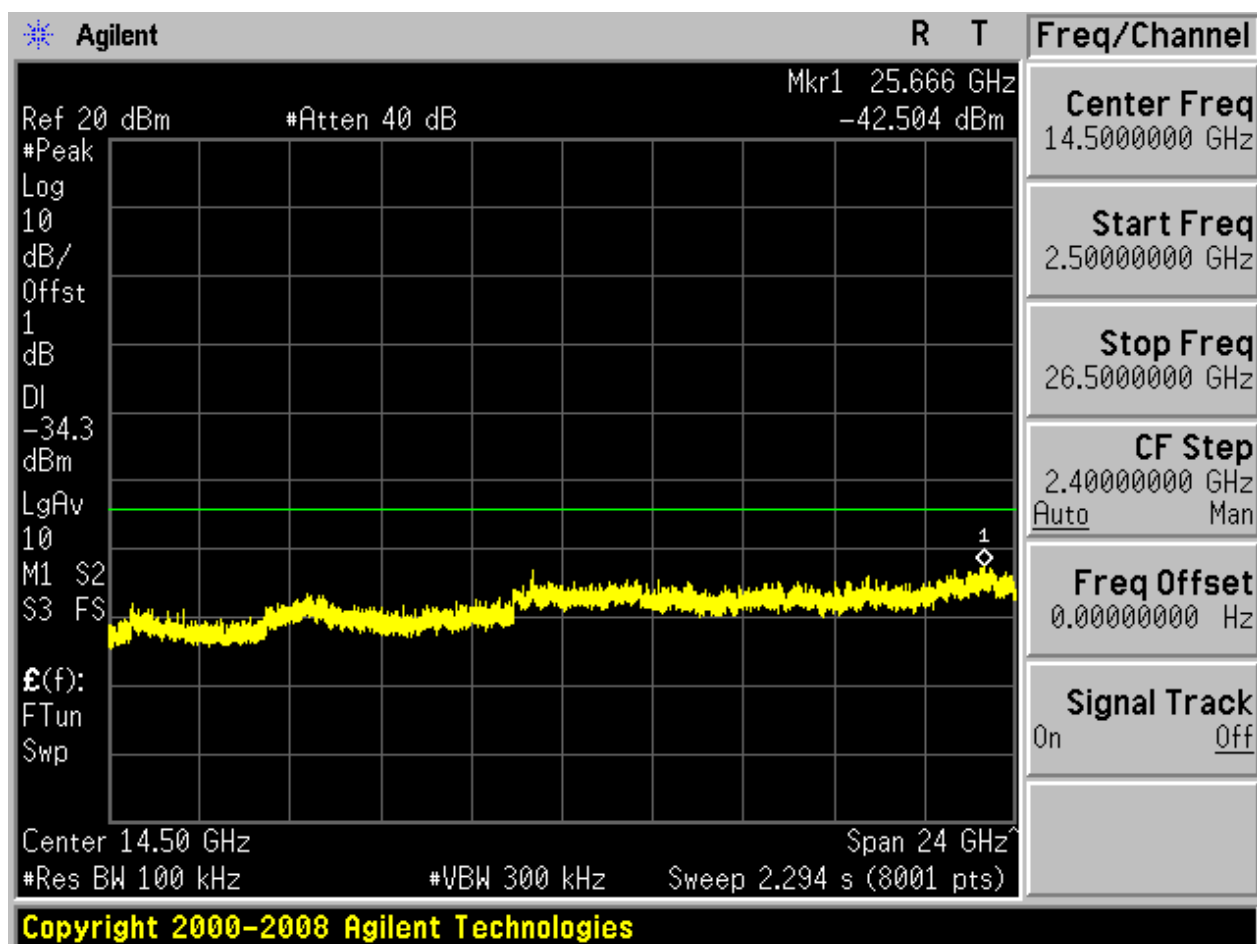


2.34 11N40m_M@Ant 2


Pref:

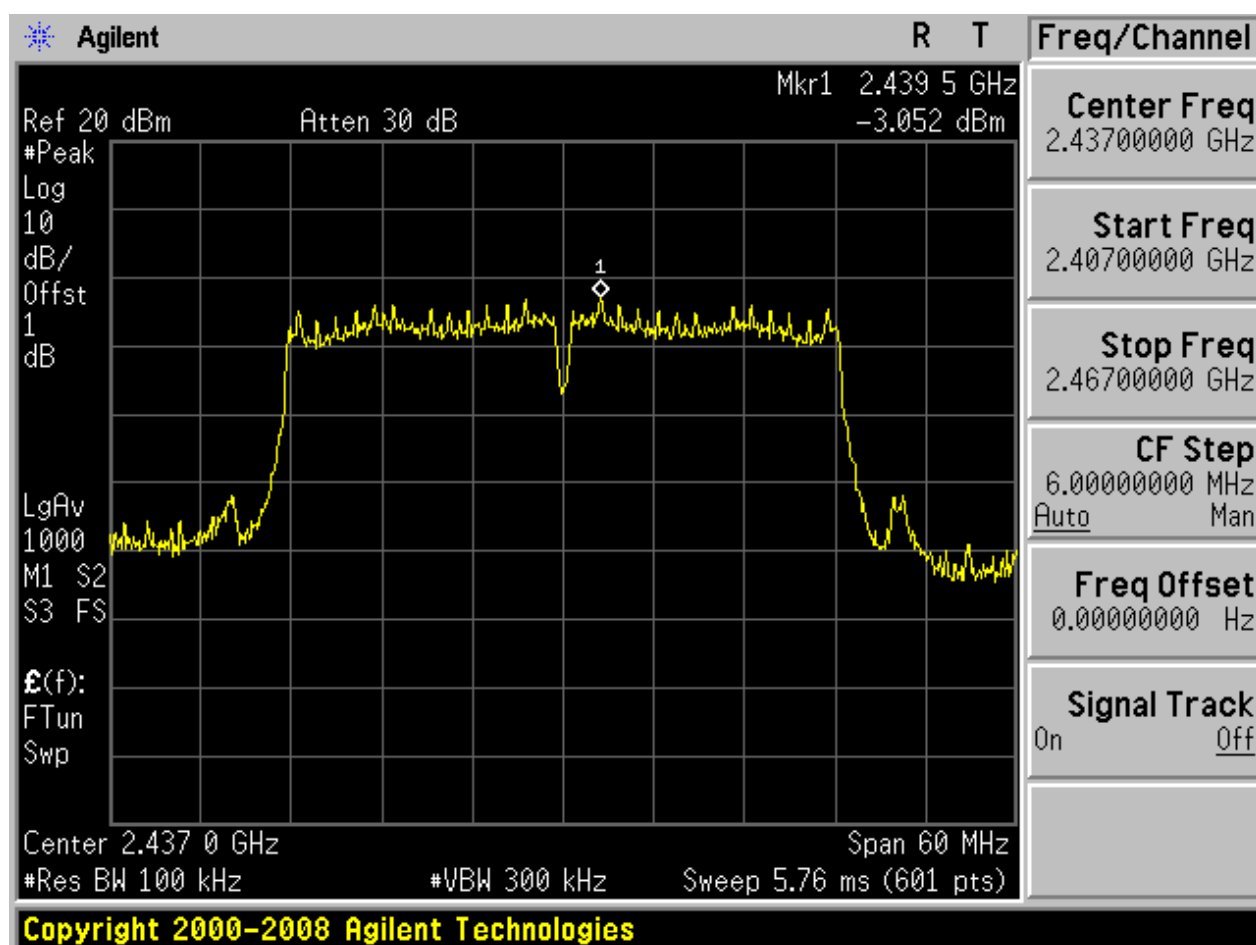






Puw:

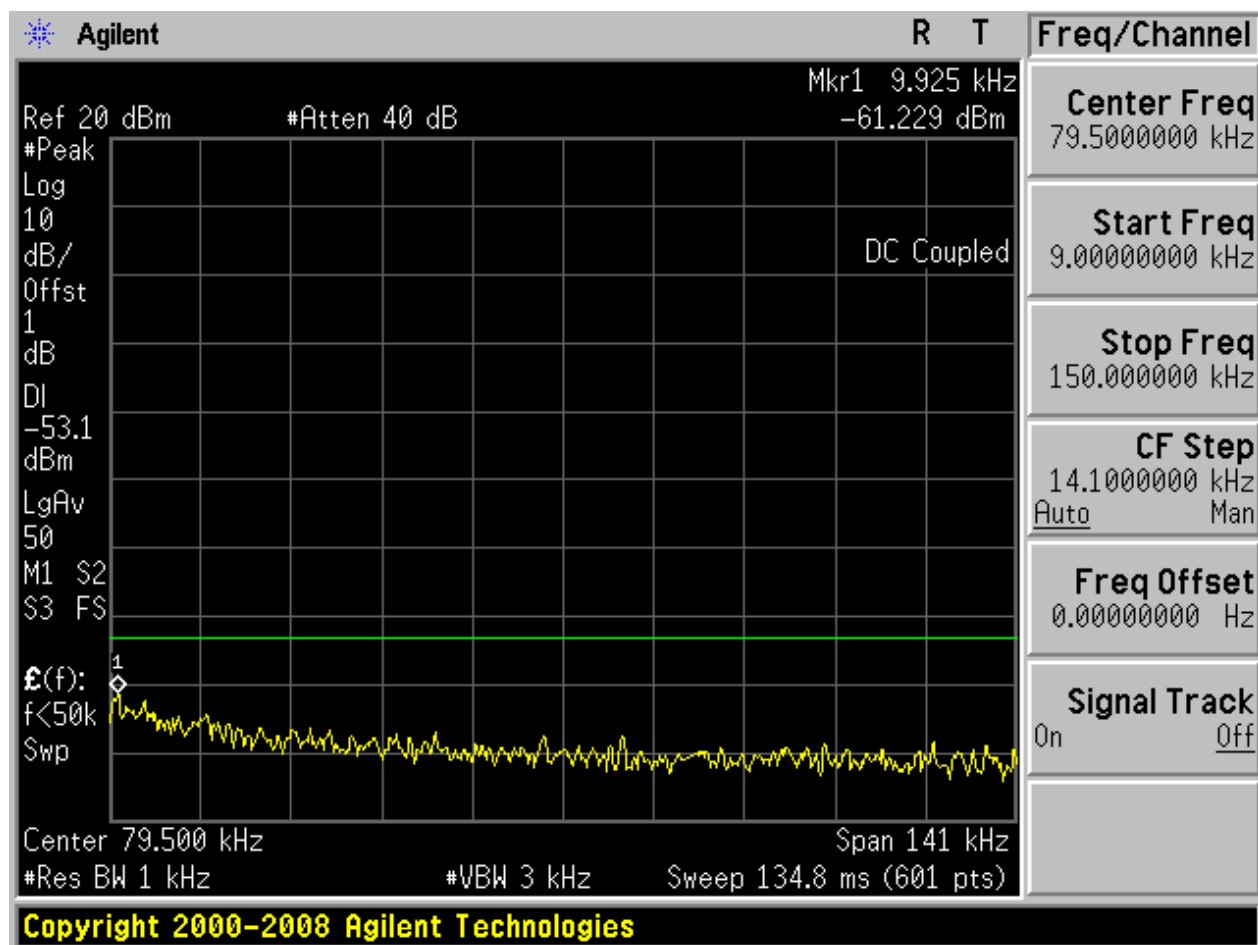


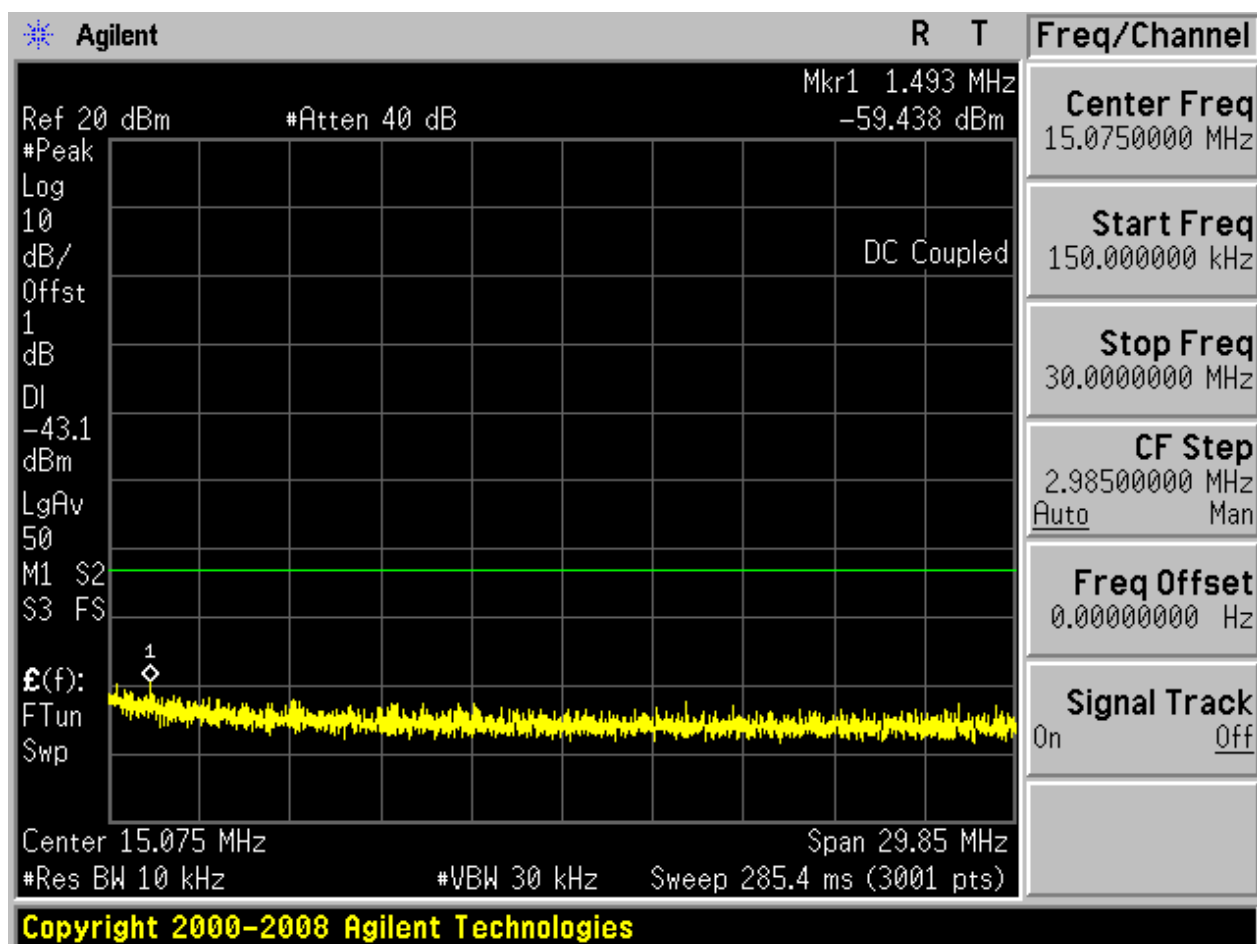

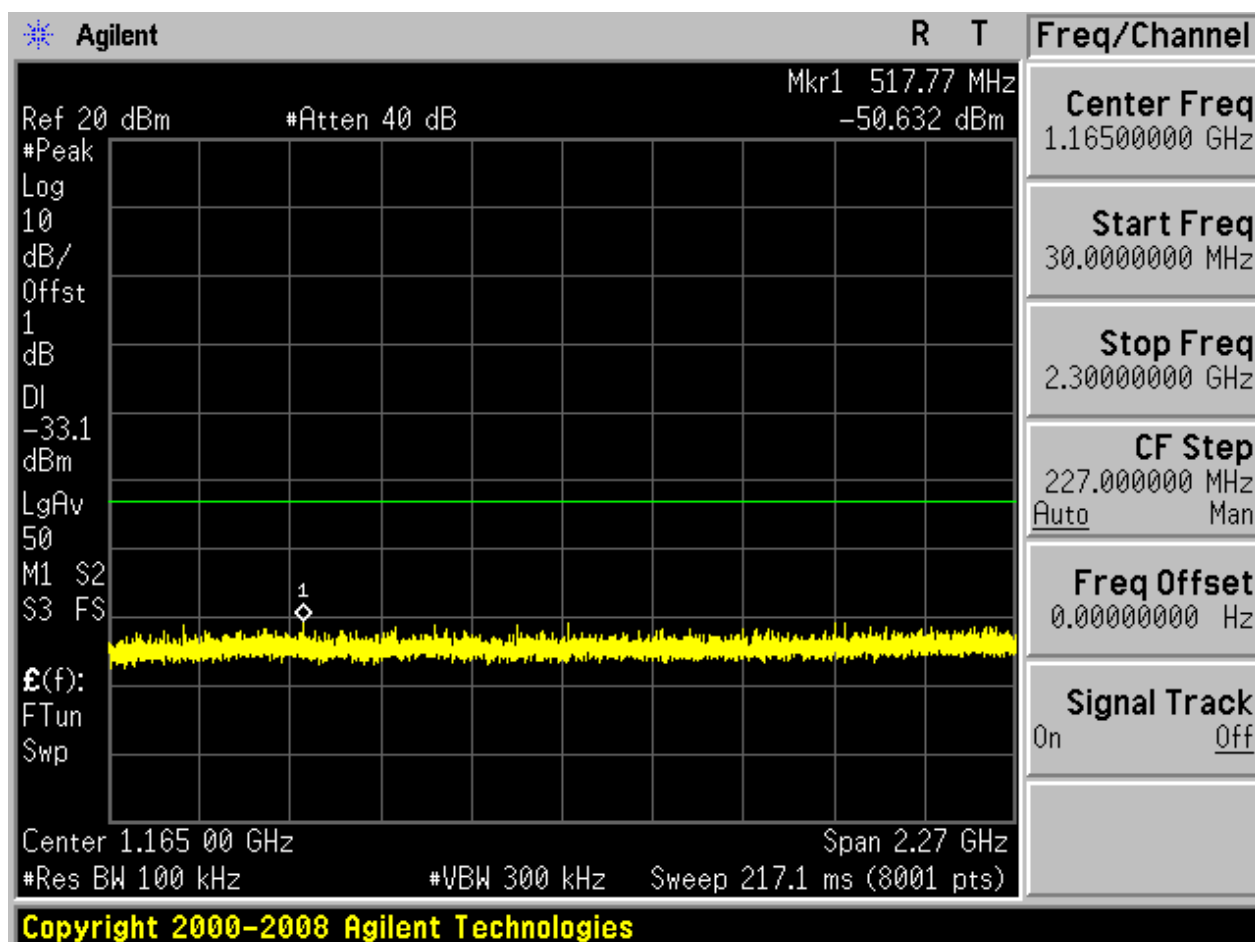

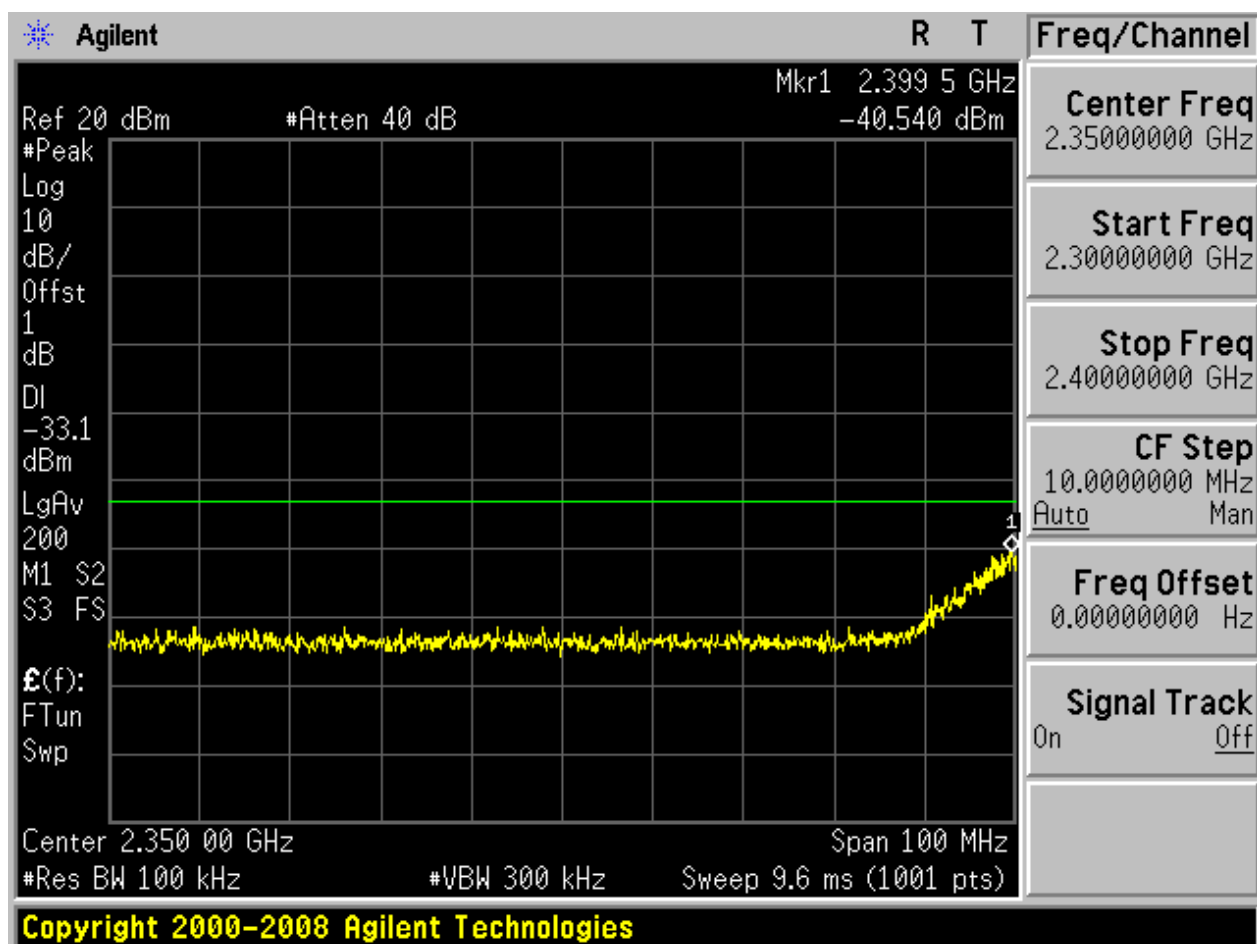


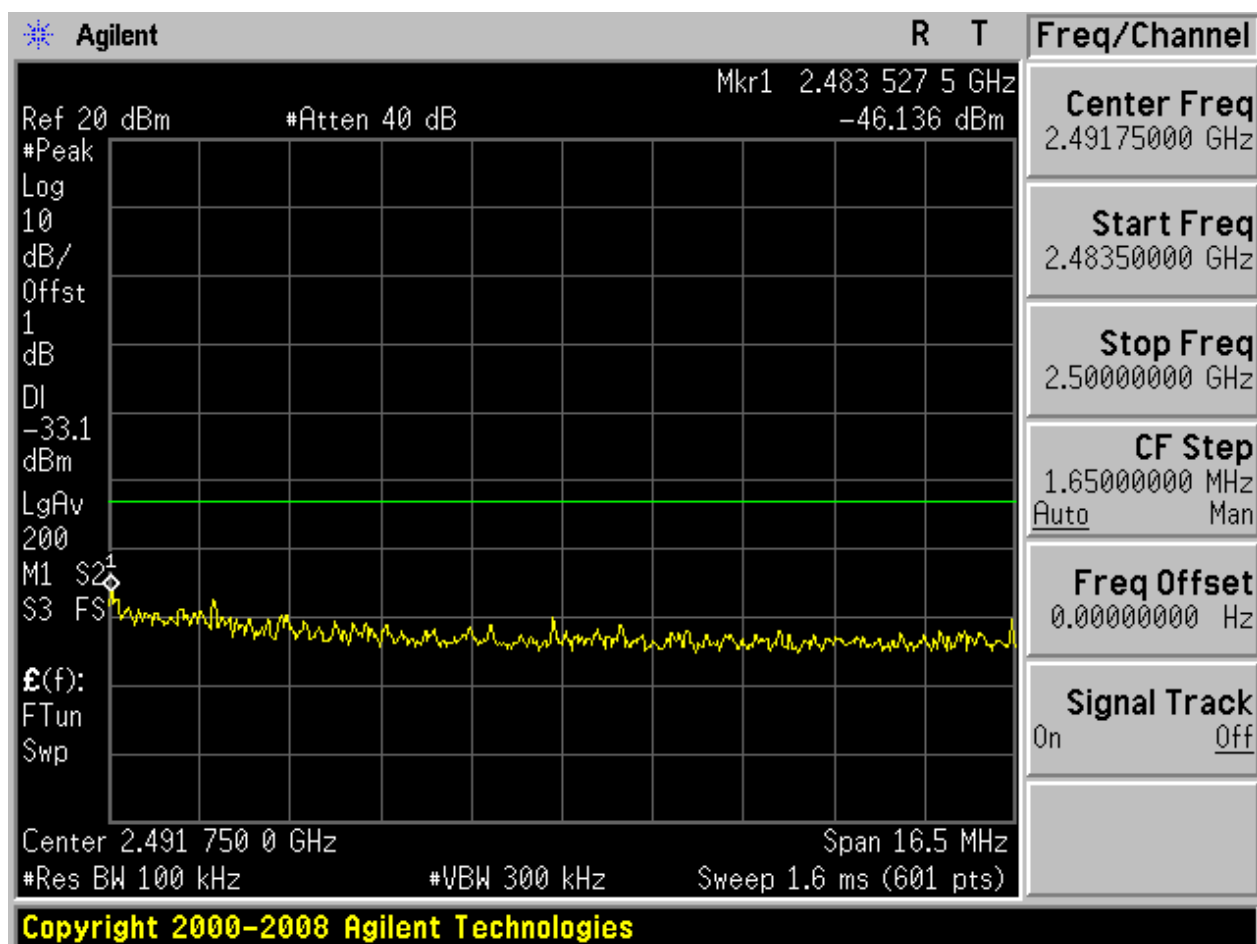

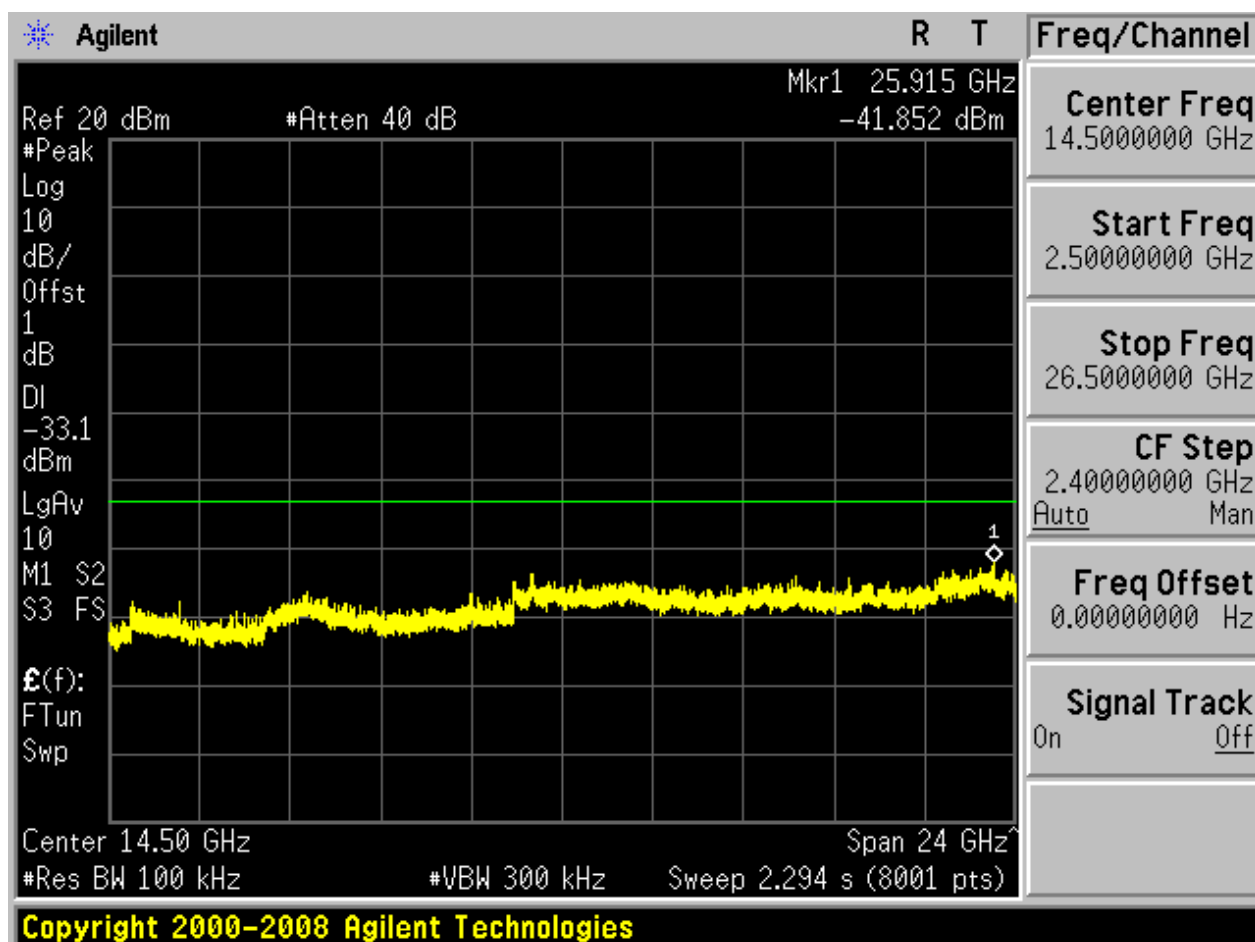


2.35 11N40m_H@Ant 1


Pref:

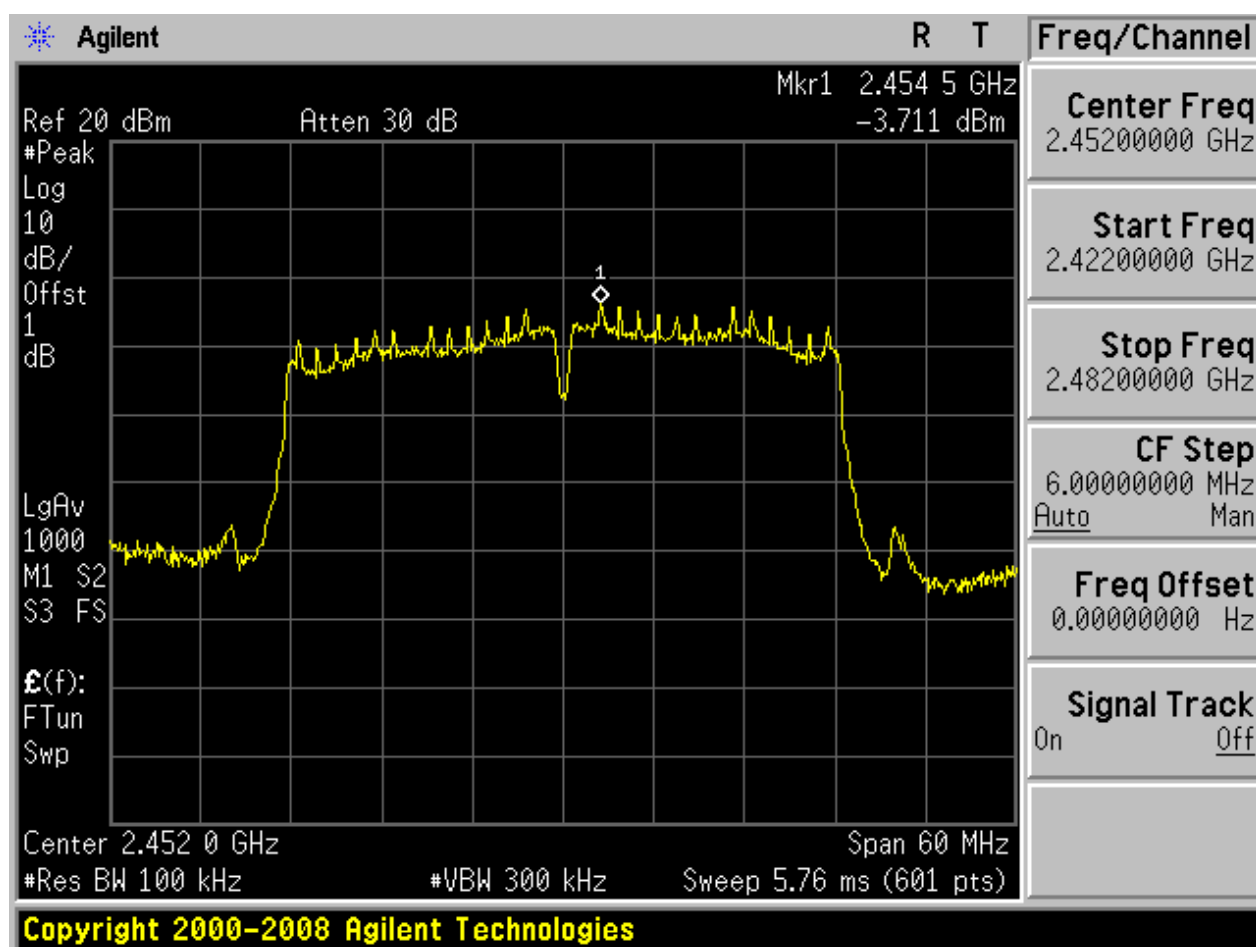






Puw:

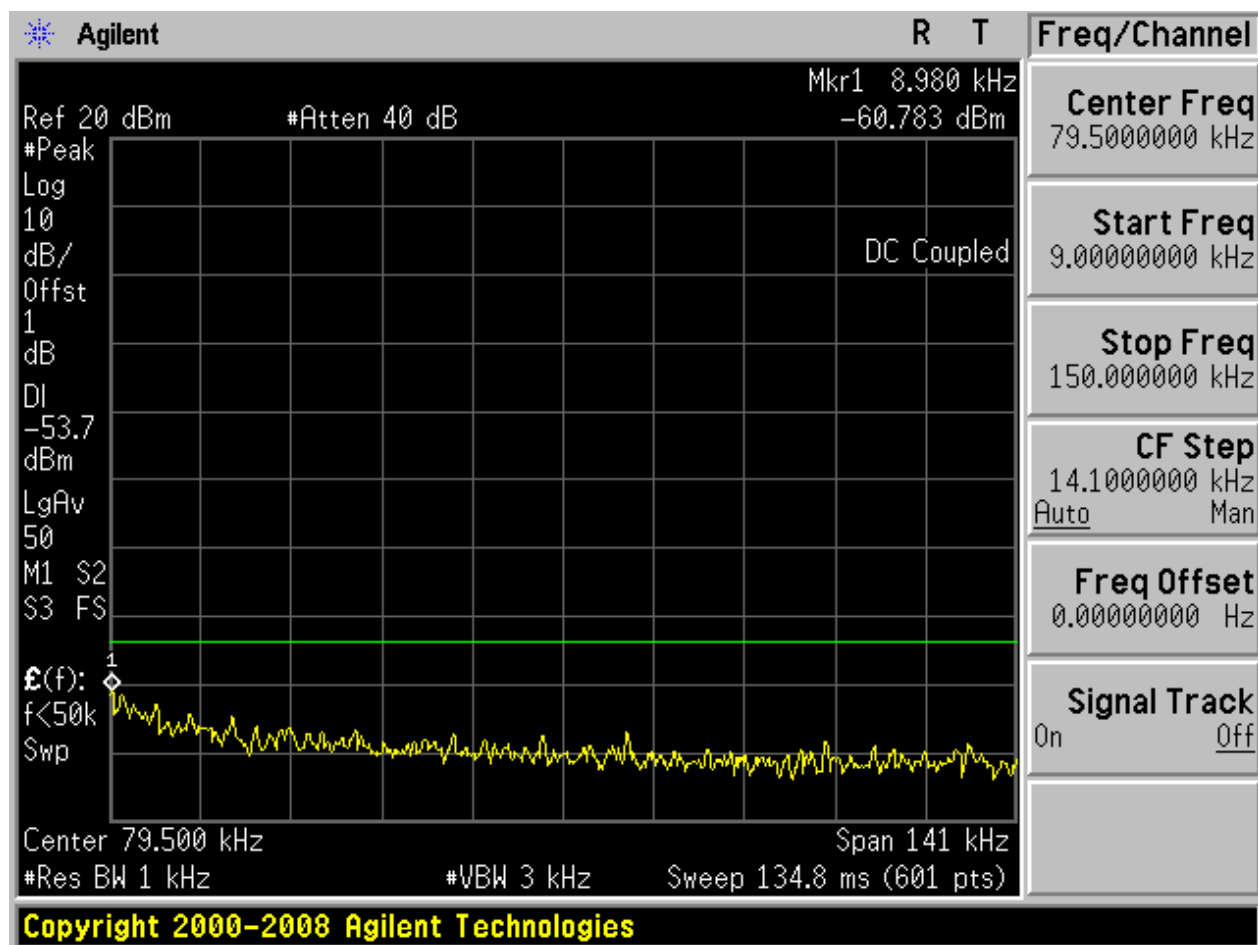


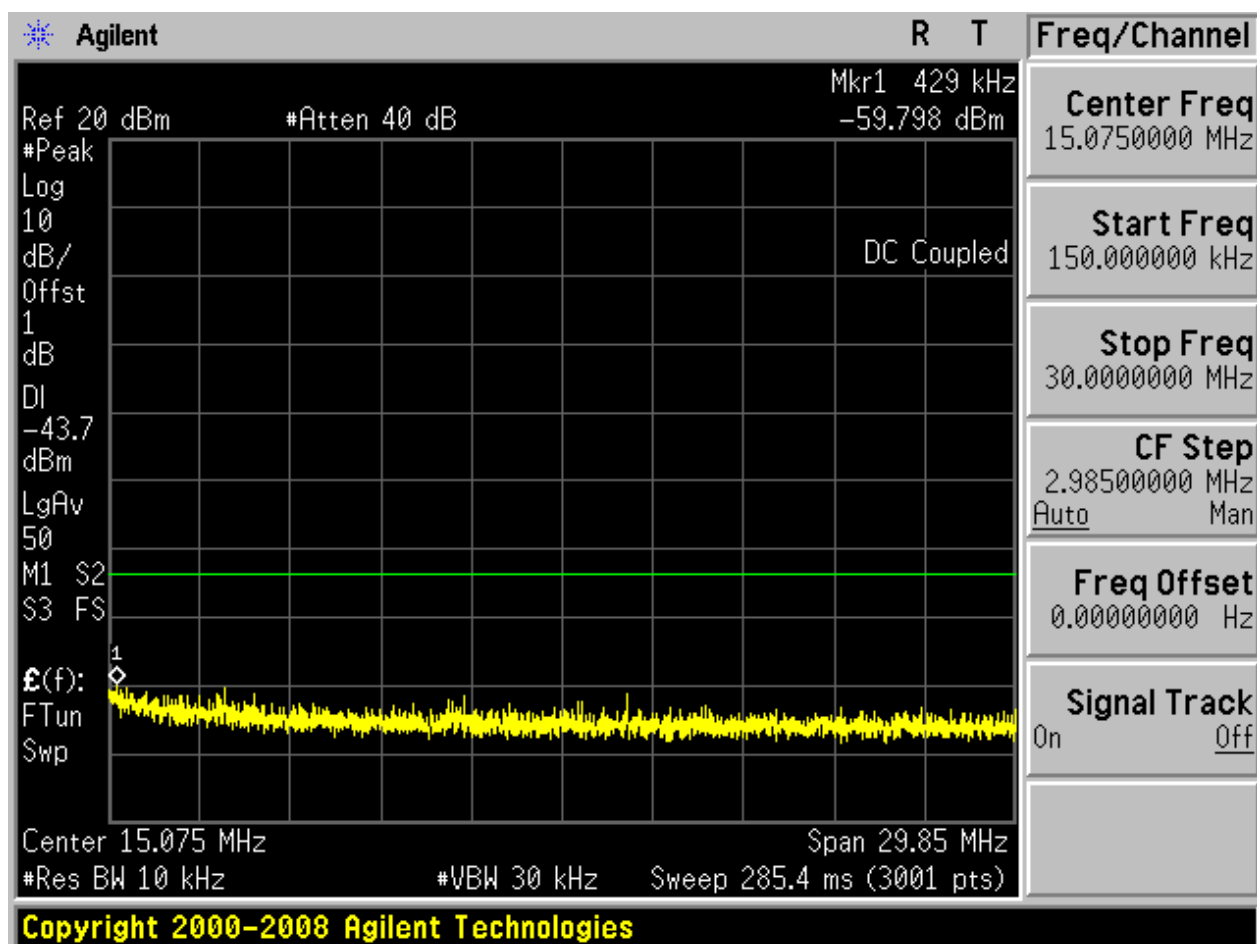

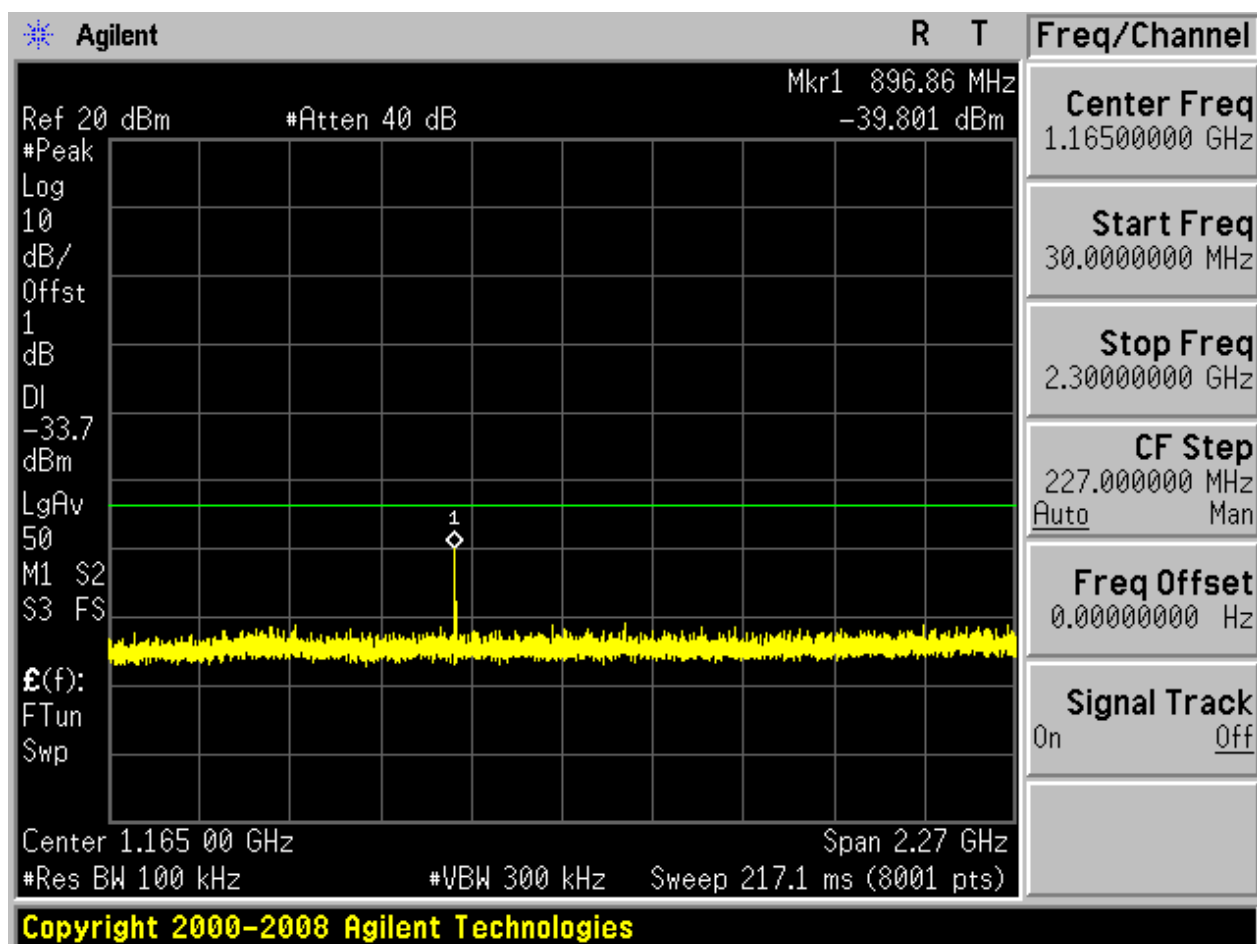

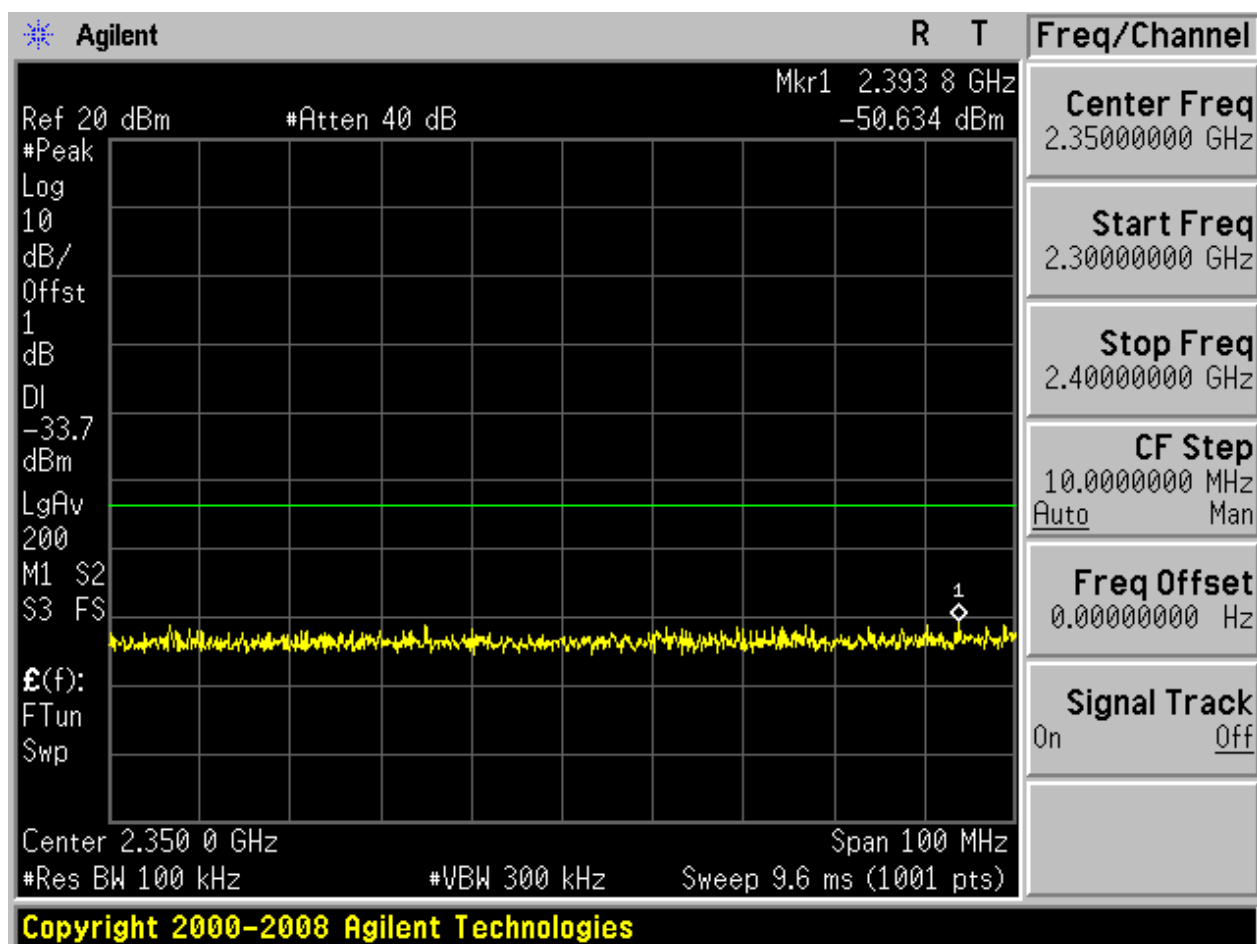

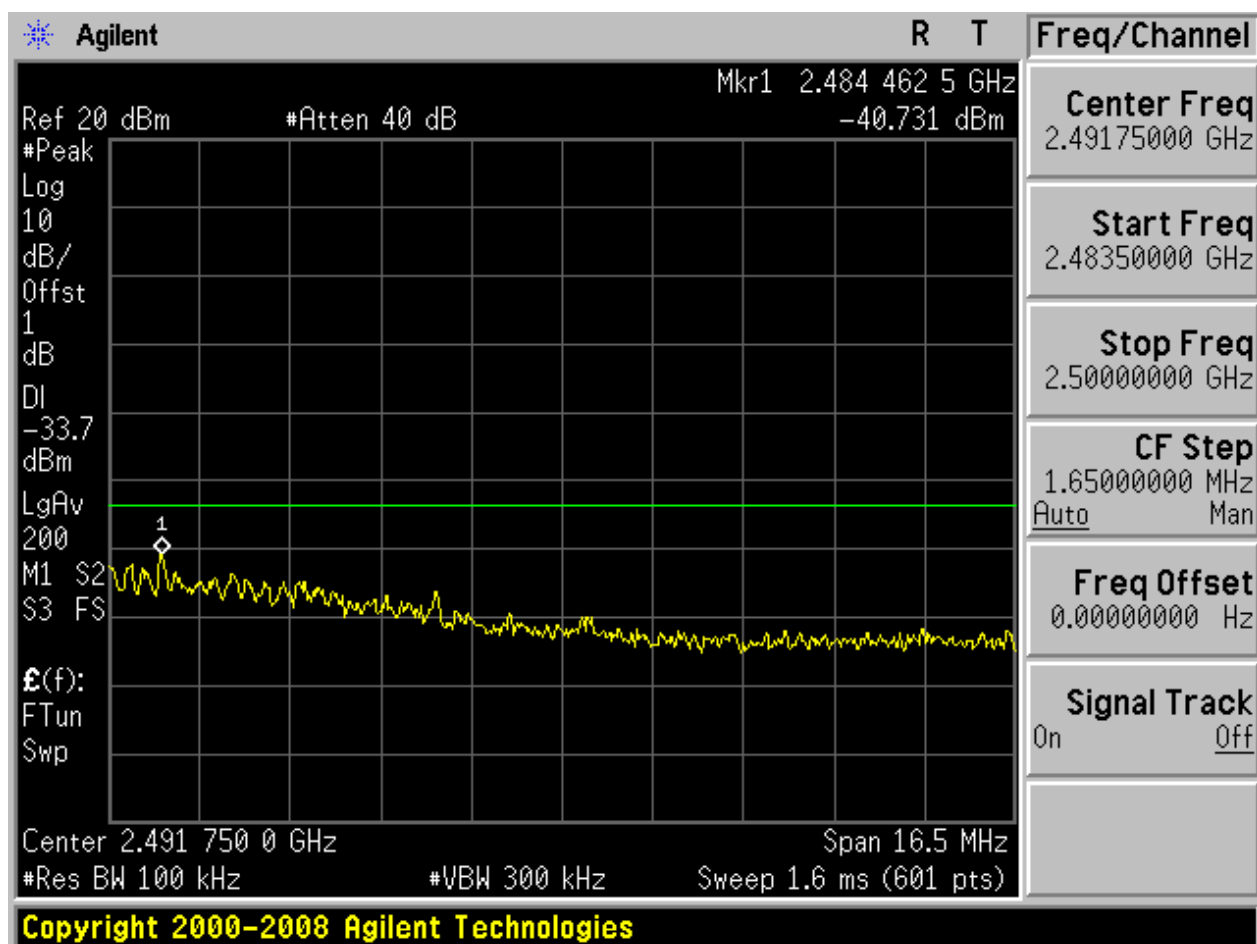


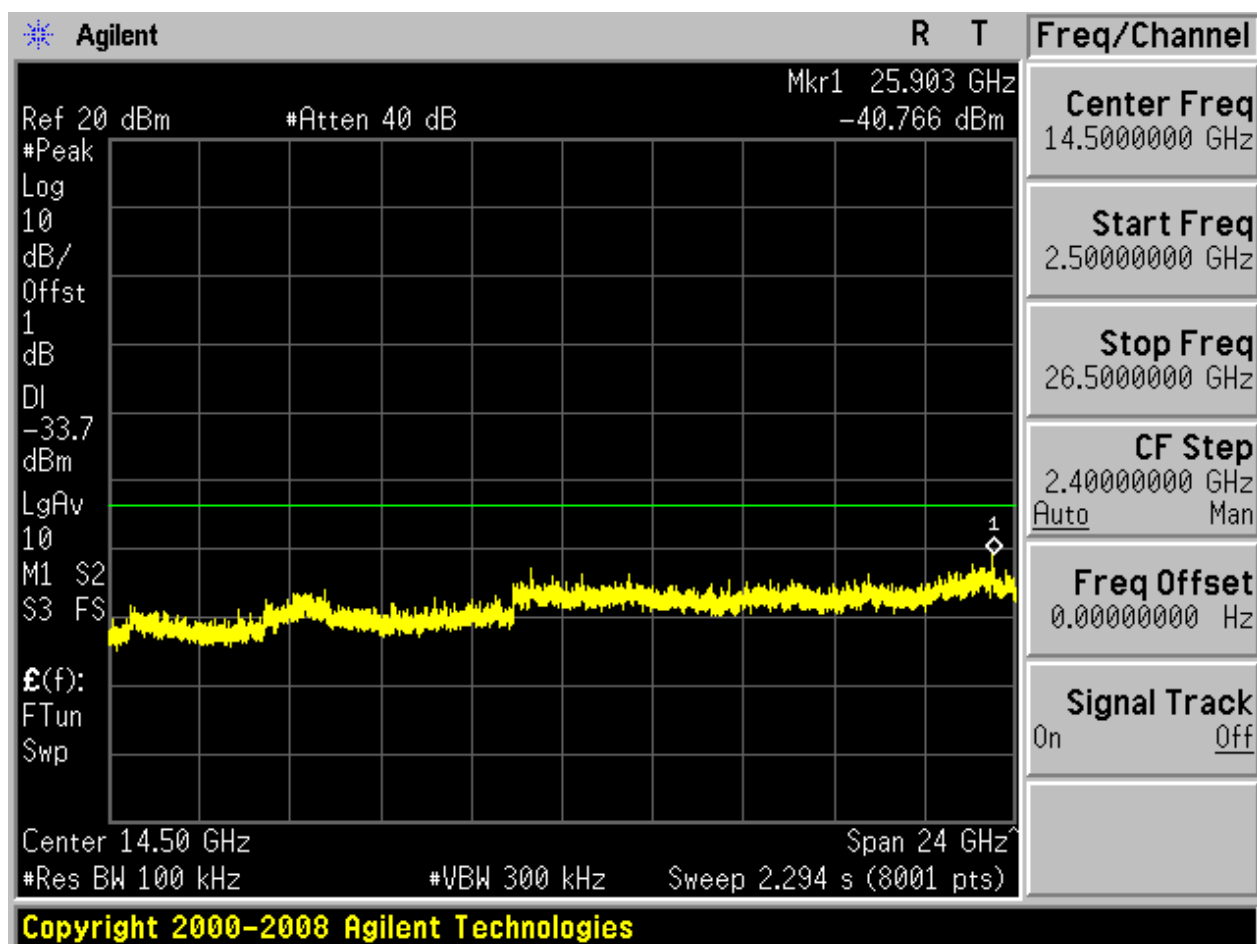




2.36 11N40m_H@Ant 2


Pref:

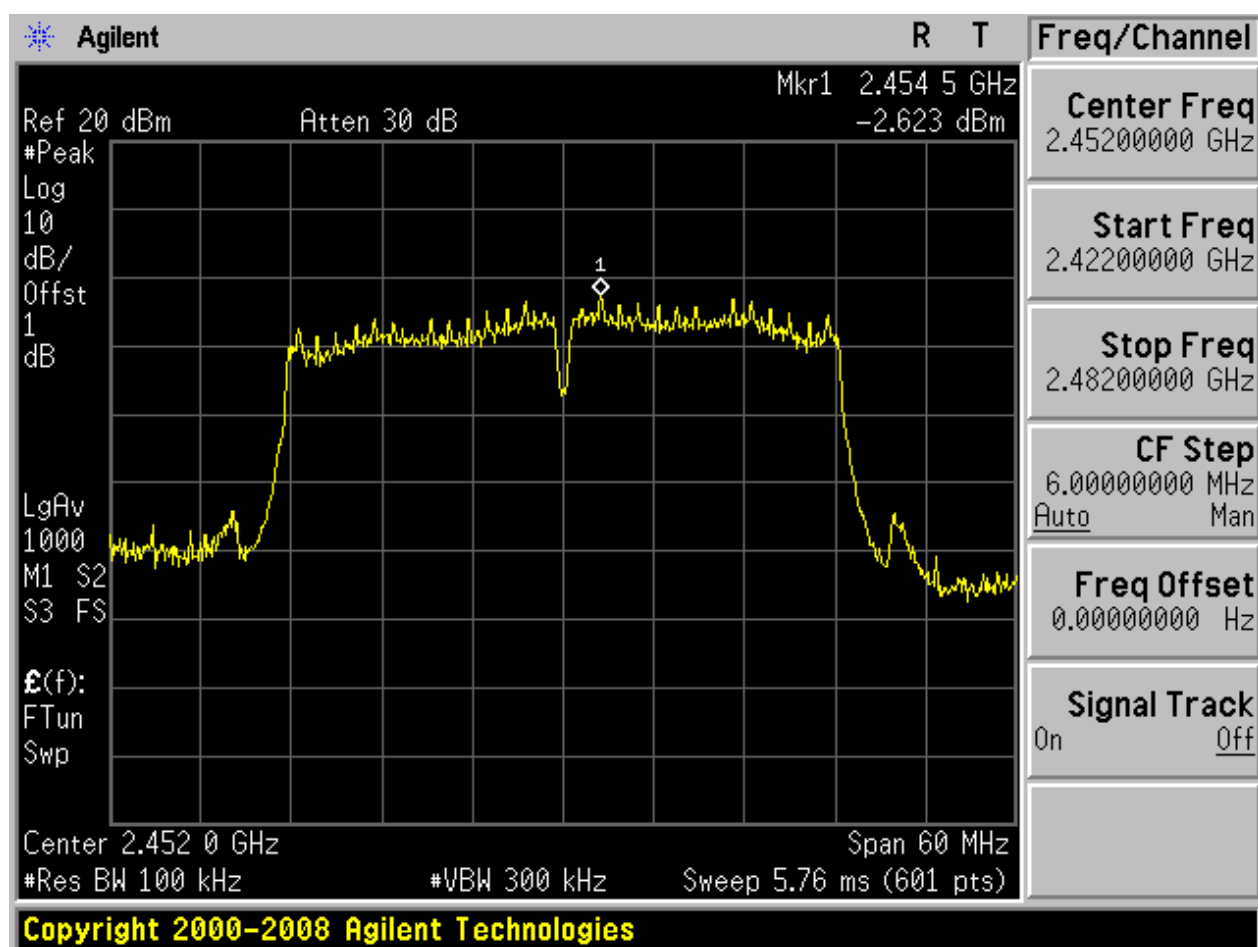






Puw:

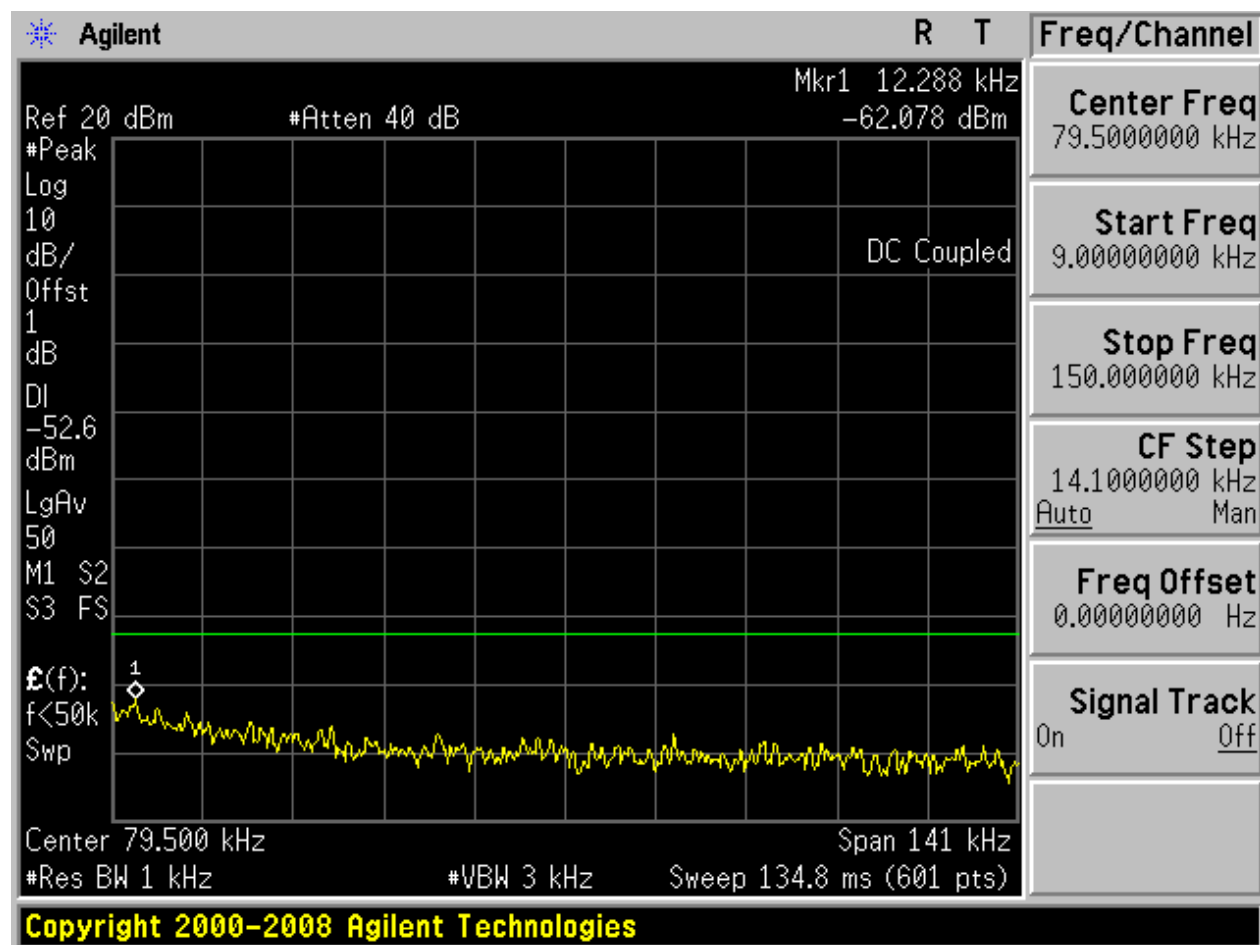


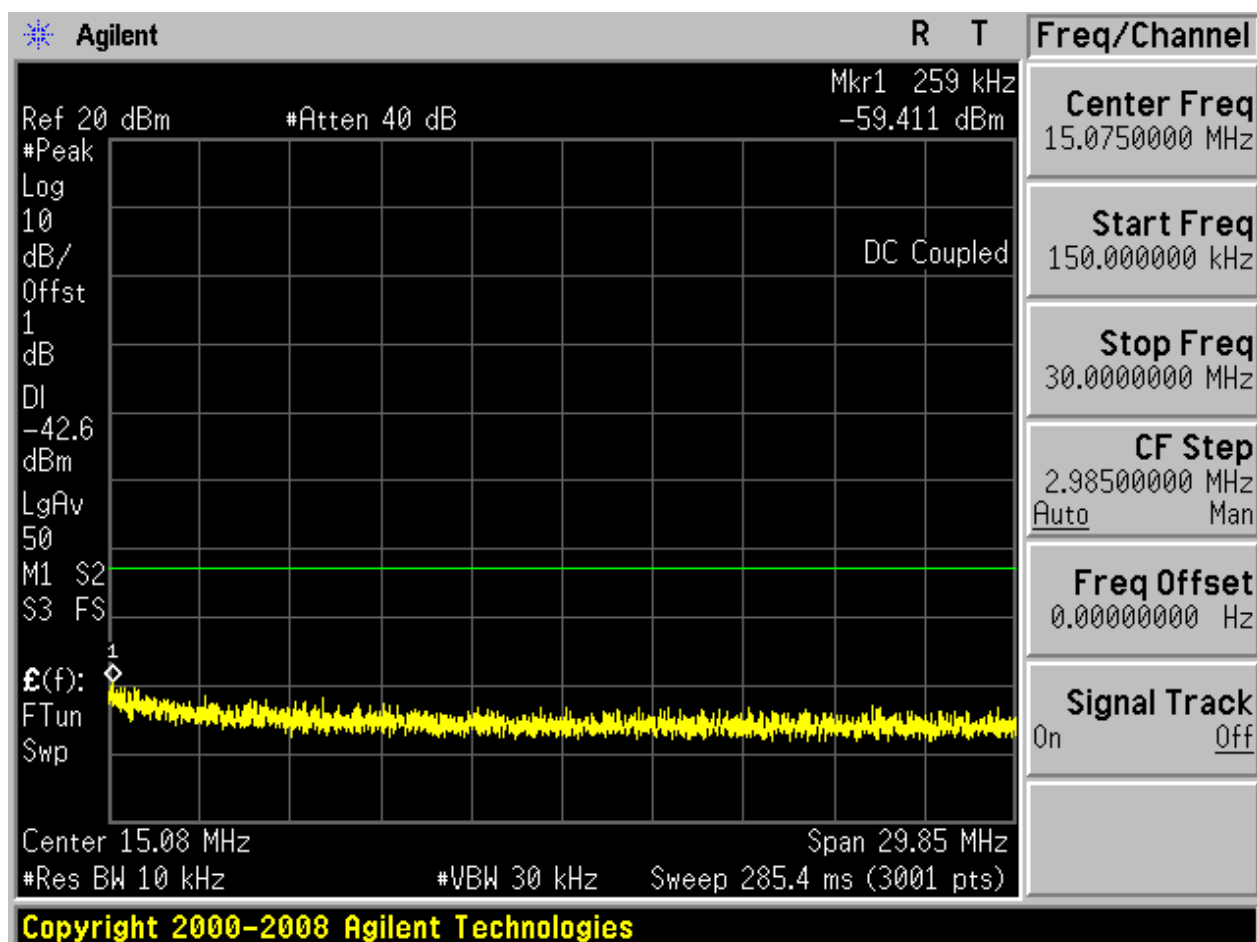

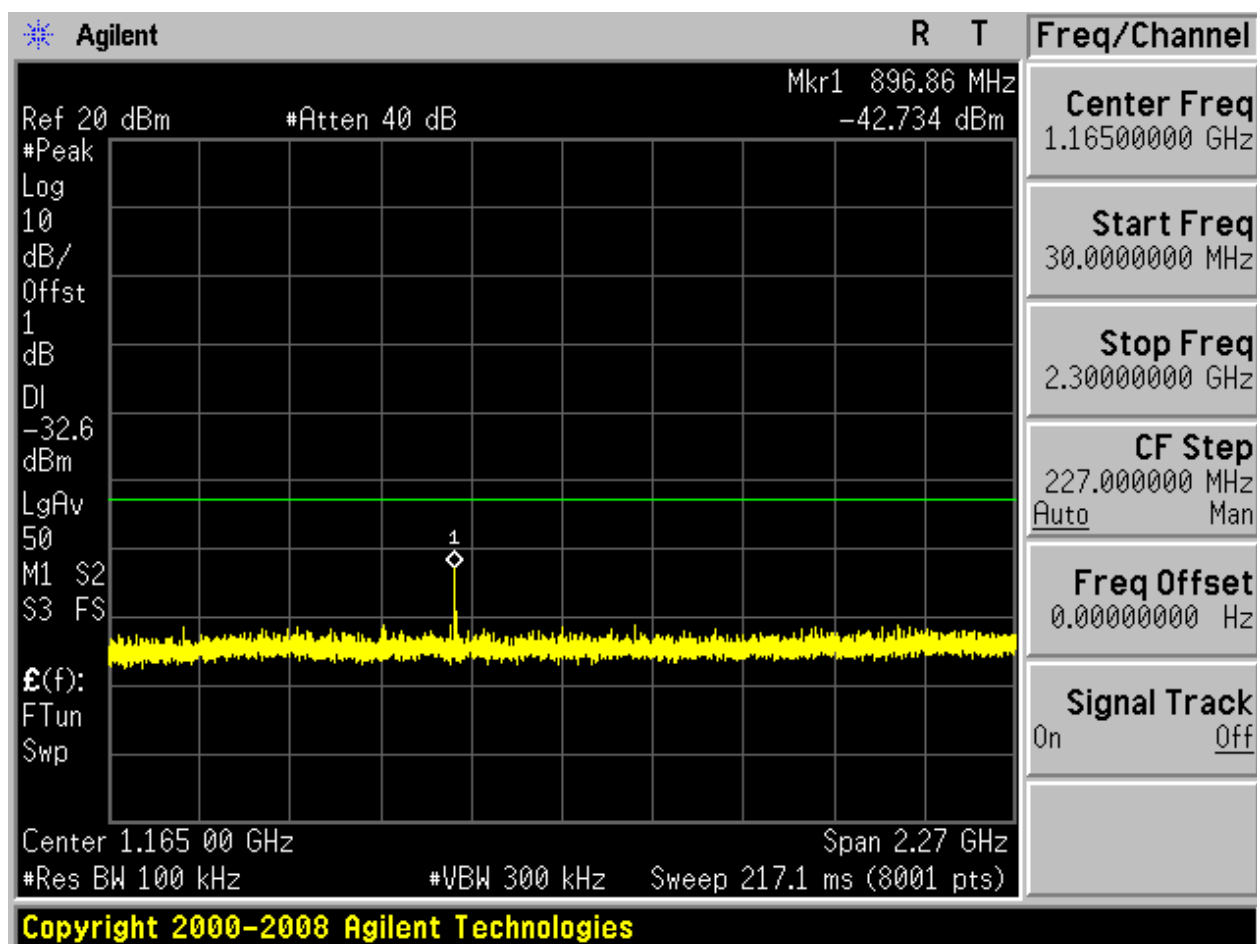

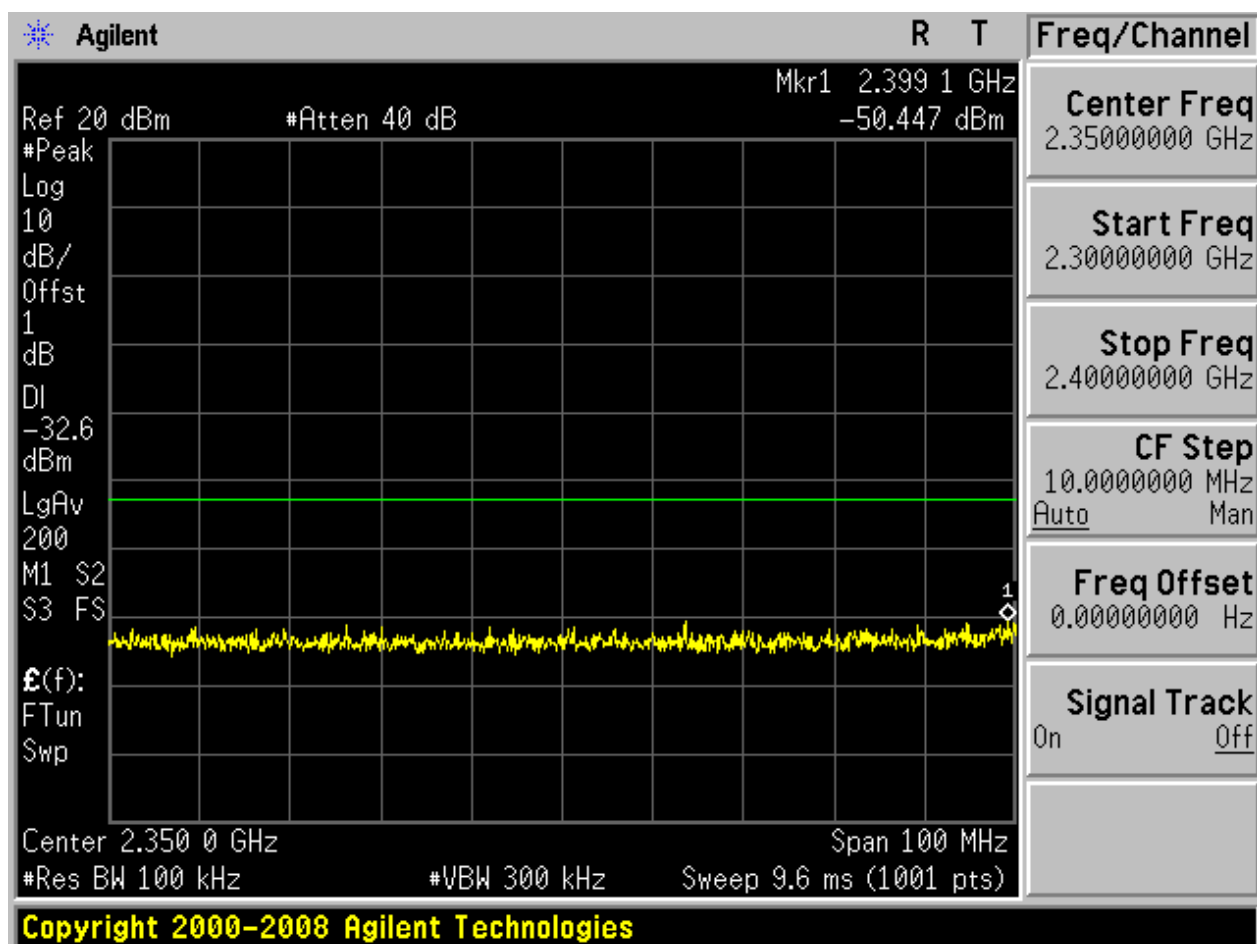

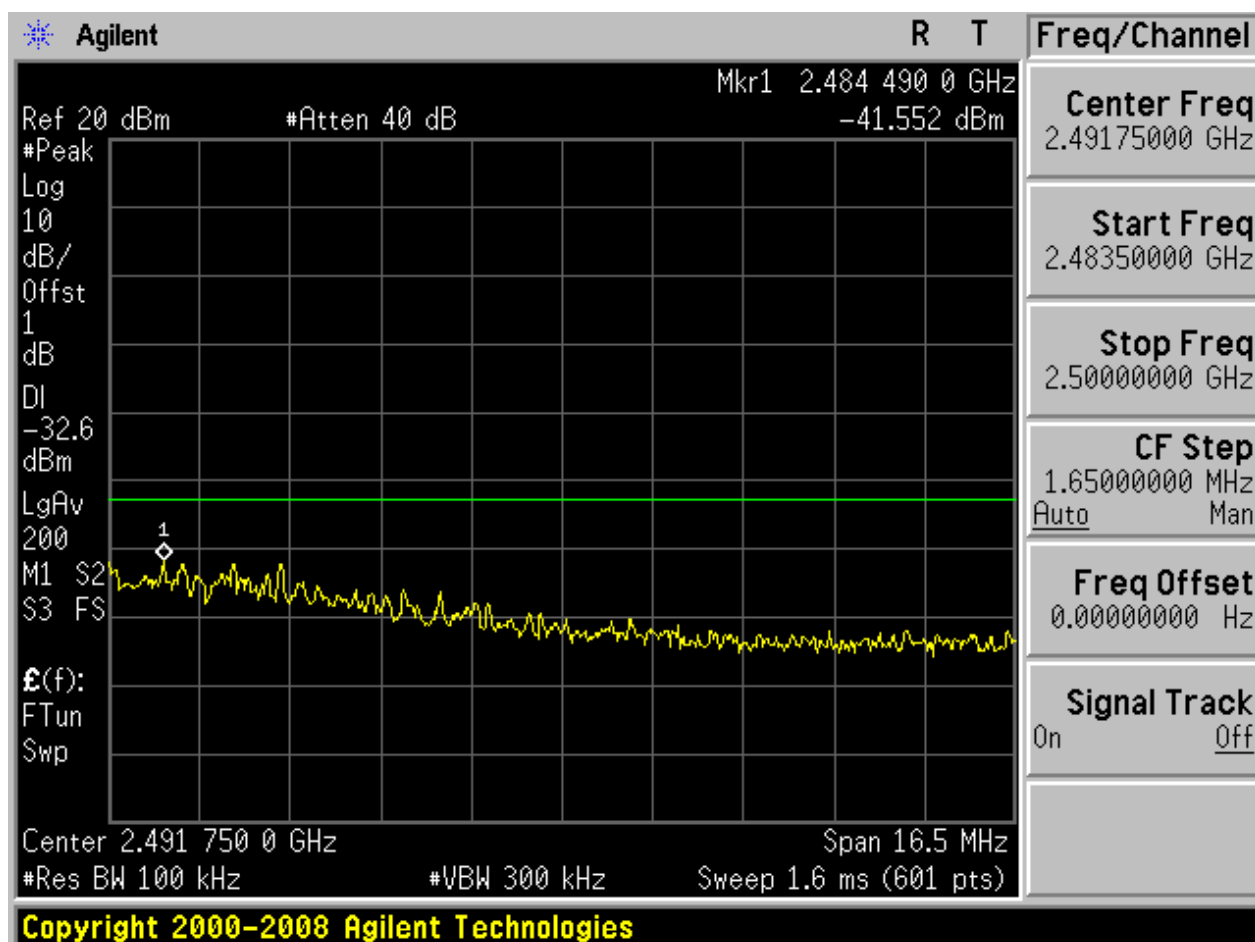

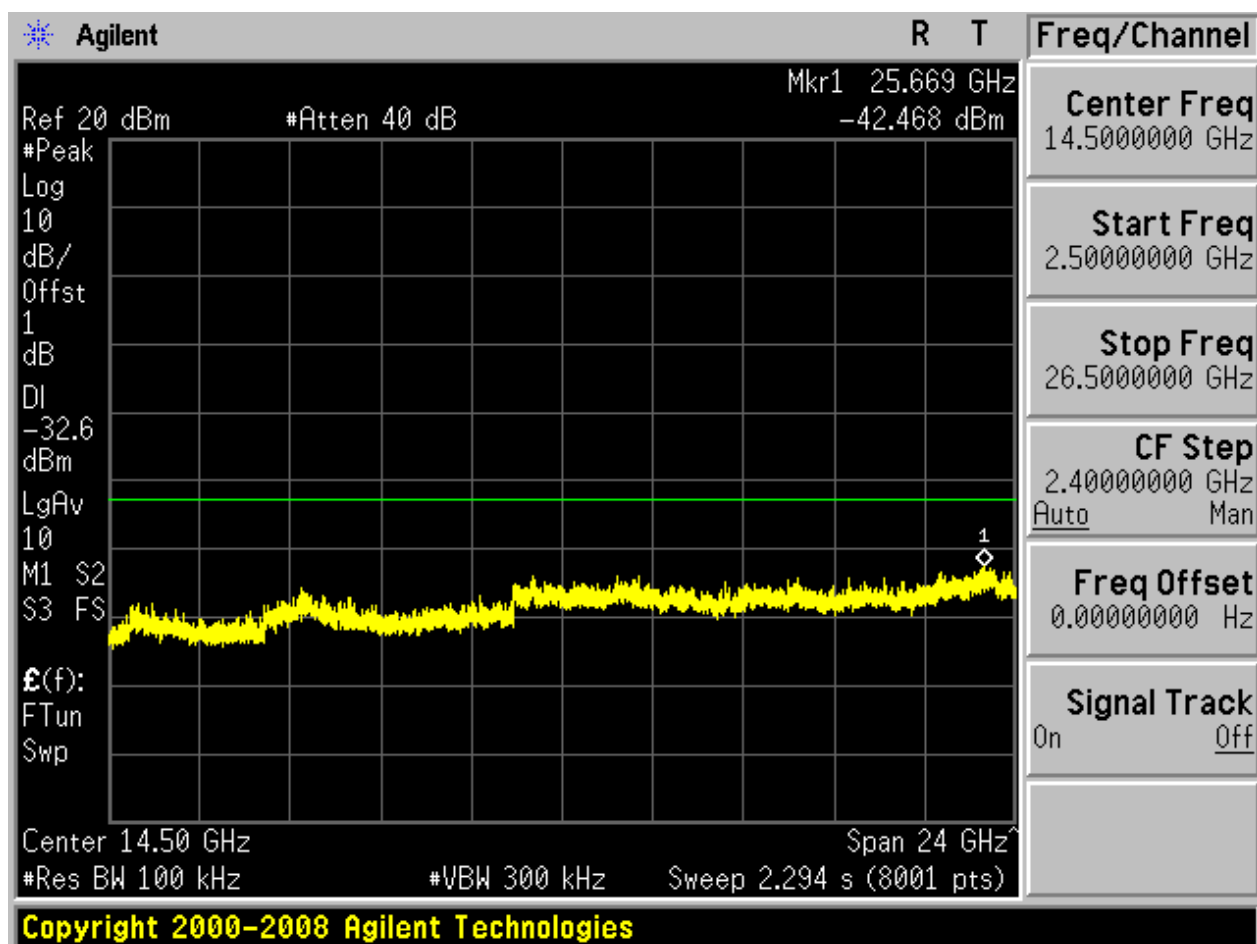




Appendix G: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case. Below 1GHz, RBW = 100 kHz, VBW = 300 kHz. Above 1GHz, RBW = 1 MHz, VBW = 3 MHz. The simultaneous transmission has been considered

Part 1: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.


Note 2: **The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).**

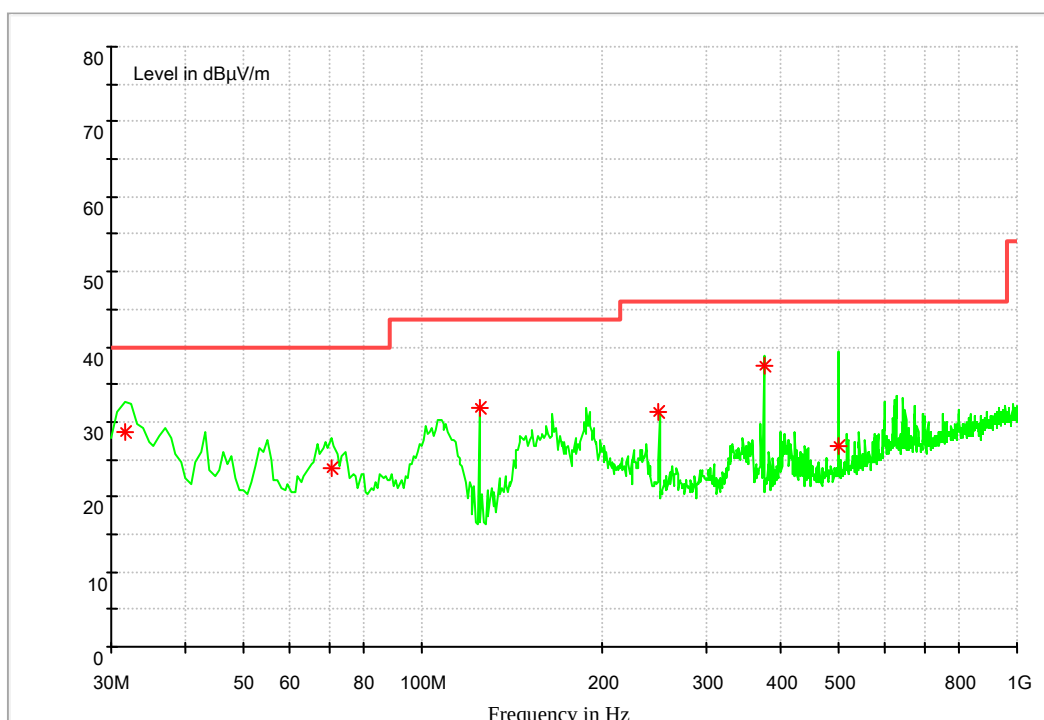

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Plarization
31.719040	28.7	14.1	40.0	11.3	100.0	107.0	VERTICAL
70.567040	23.9	10.9	40.0	16.1	100.0	295.0	HORIZONTAL
125.000320	31.9	11.4	43.5	11.6	100.0	131.0	VERTICAL
249.988480	31.2	14.4	46.0	14.8	100.0	225.0	HORIZONTAL
374.964800	37.4	17.4	46.0	8.6	100.0	237.0	HORIZONTAL
500.088960	26.6	19.8	46.0	19.4	100.0	192.0	VERTICAL

Part 2: Testing Range of “18 GHz to 26.5 GHz”

Note: No peak found in pre- test.

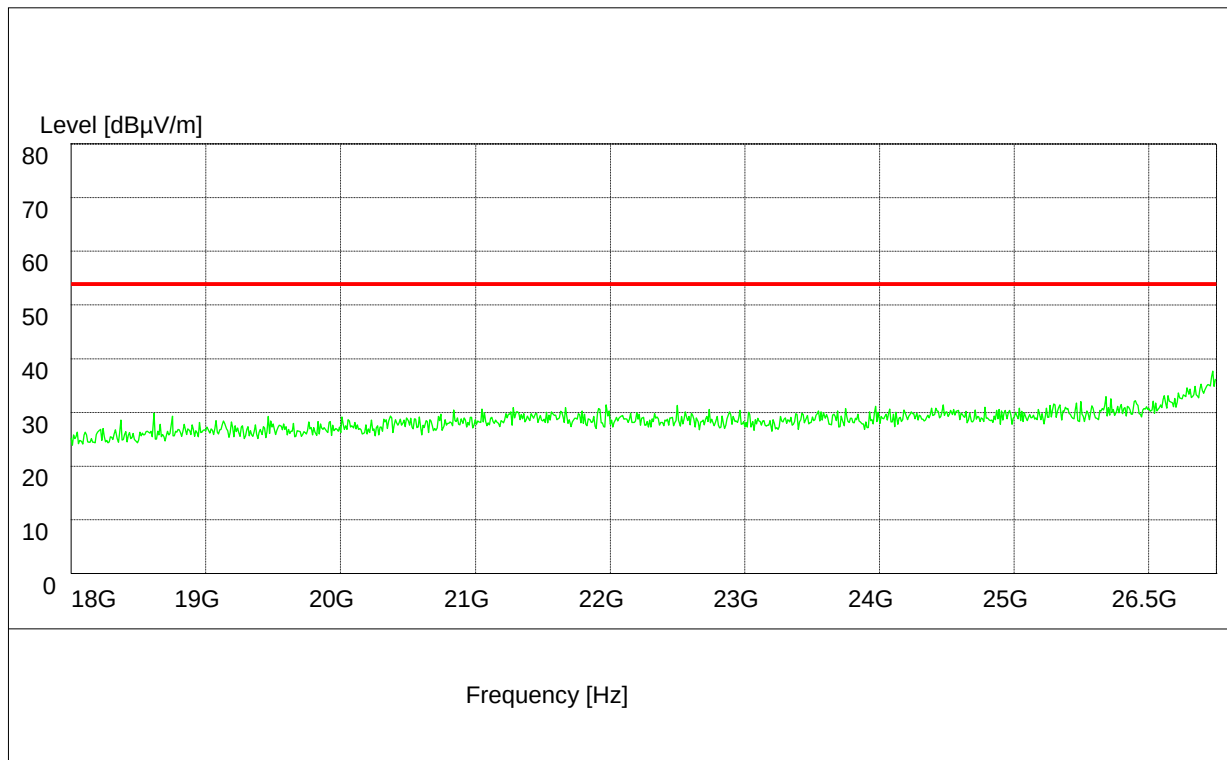


Part 3: Testing Range of “2.3GHz to 2.5GHz”

- Note 1: The testing range of “2.3 GHz to 2.5 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Test Mode: 11B_L@Ant 1

Channel 1

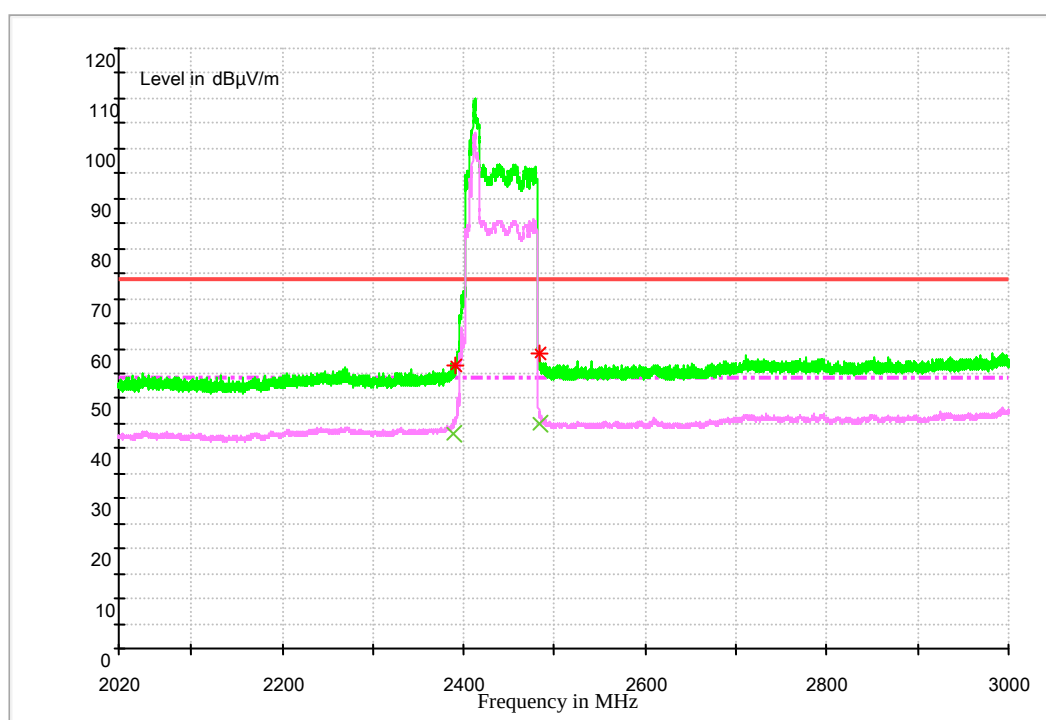

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	56.5	38.3	74.0	17.5	100.0	76.0	VERTICAL
2483.500000	58.9	41.0	74.0	15.1	100.0	123.0	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	42.9	38.3	54.0	11.1	100.0	76.0	VERTICAL
2483.500000	44.9	40.8	54.0	9.1	100.0	237.0	VERTICAL

Test Mode: 11B_H@Ant 1

Channel 11

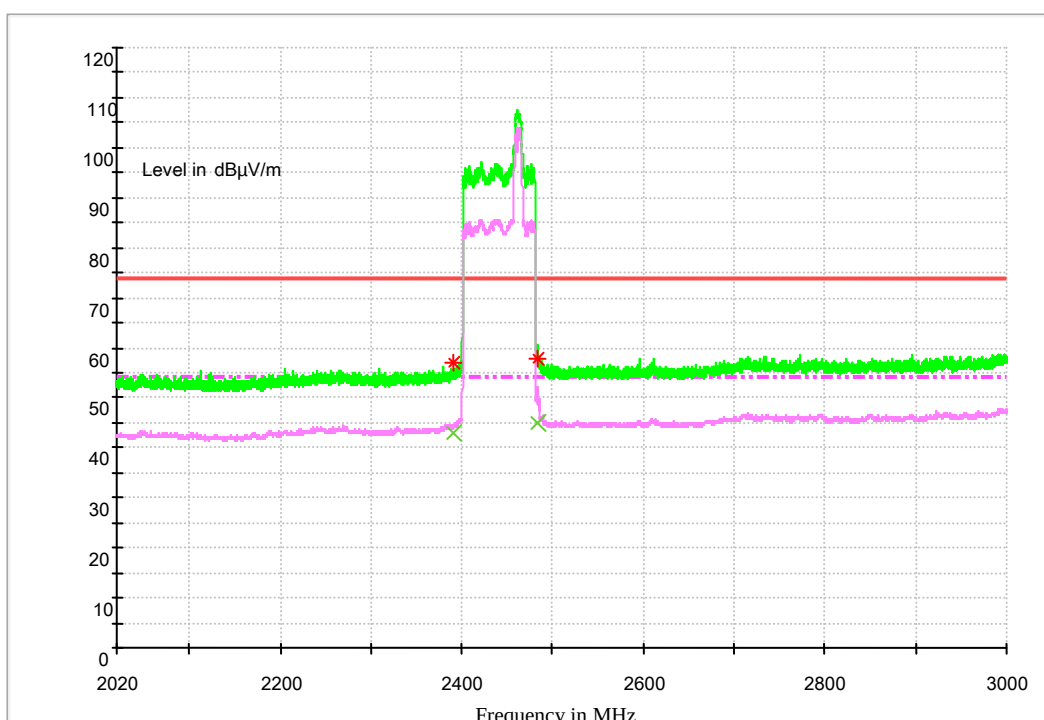

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	56.5	38.3	74.0	17.5	100.0	76.0	VERTICAL
2483.500000	58.9	41.0	74.0	15.1	100.0	123.0	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	42.9	38.3	54.0	11.1	100.0	76.0	HORIZONTAL
2483.500000	44.9	40.8	54.0	9.1	100.0	123.0	VERTICAL

Test Mode: 11B_L@Ant 2

Channel 1

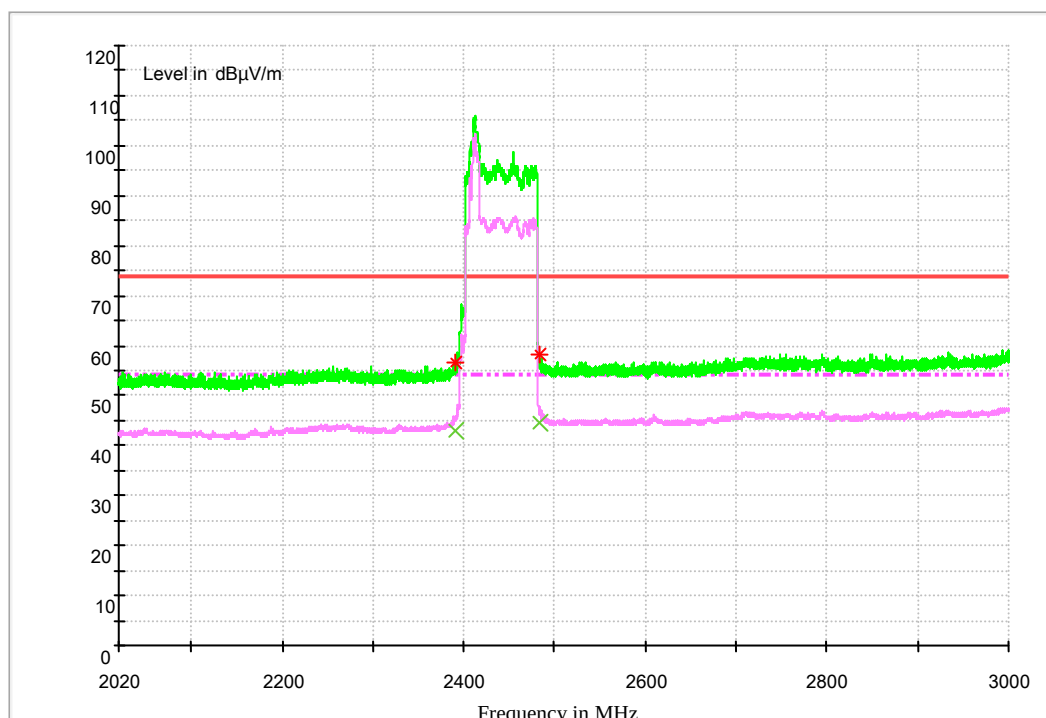

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	56.6	38.3	74.0	17.4	100.0	124.0	HORIZONTAL
2483.500000	58.2	40.4	74.0	15.8	100.0	285.0	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	42.9	38.3	54.0	11.1	100.0	35.0	VERTICAL
2483.500000	44.5	40.5	54.0	9.5	100.0	330.0	VERTICAL

Test Mode: 11B_H@Ant 2

Channel 11

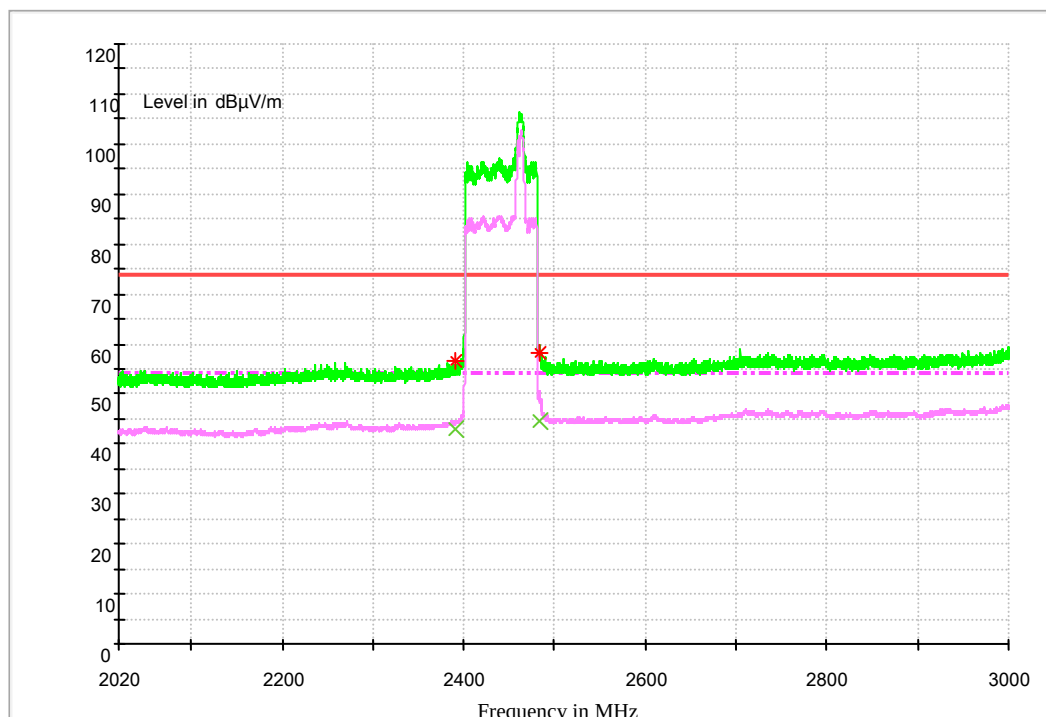

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	56.7	38.3	74.0	17.3	100.0	32.0	VERTICAL
2483.500000	58.1	40.5	74.0	15.9	100.0	0.0	VERTICAL


MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	43.1	38.3	54.0	10.9	100.0	0.0	VERTICAL
2483.500000	44.5	40.4	54.0	9.5	100.0	0.0	VERTICAL

Test Mode: 11G_L@Ant 1

Channel 1

FCC CLASS B WIFI 1GHz-3GHz

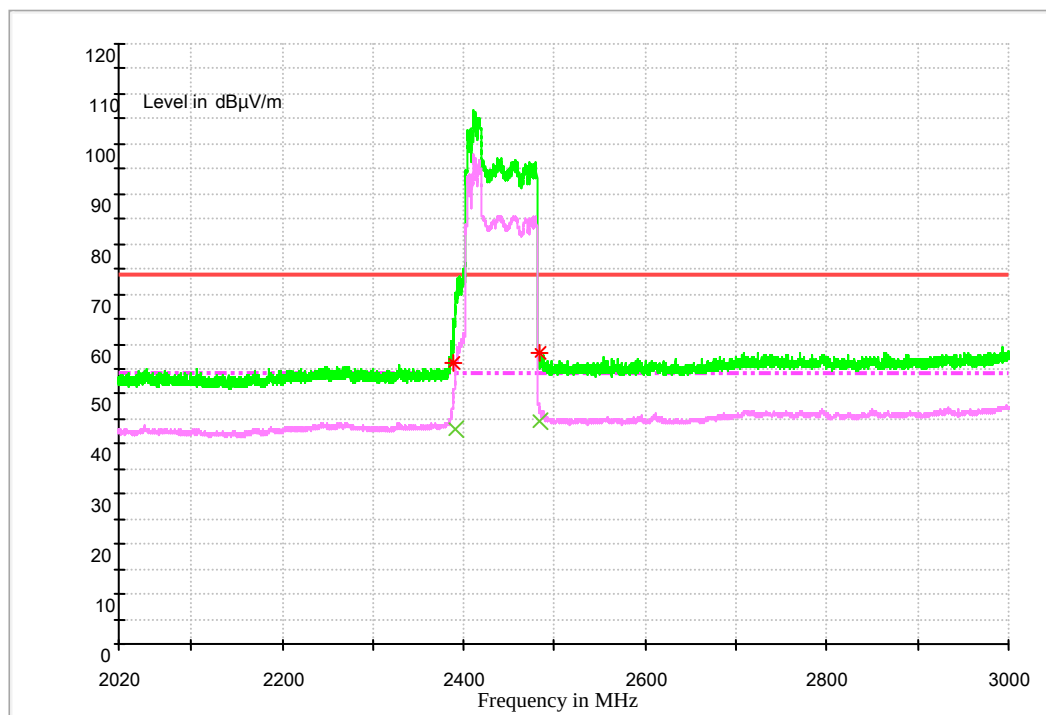

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	56.1	38.3	74.0	17.9	100.0	83.0	VERTICAL
2483.500000	58.2	40.1	74.0	15.8	100.0	102.0	HORIZONTAL


MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	42.9	38.3	54.0	11.1	100.0	68.0	VERTICAL
2483.500000	44.7	40.7	54.0	9.3	100.0	120.0	VERTICAL

Test Mode: 11G_H@Ant 1

Channel 11

FCC CLASS B WIFI 1GHz-3GHz

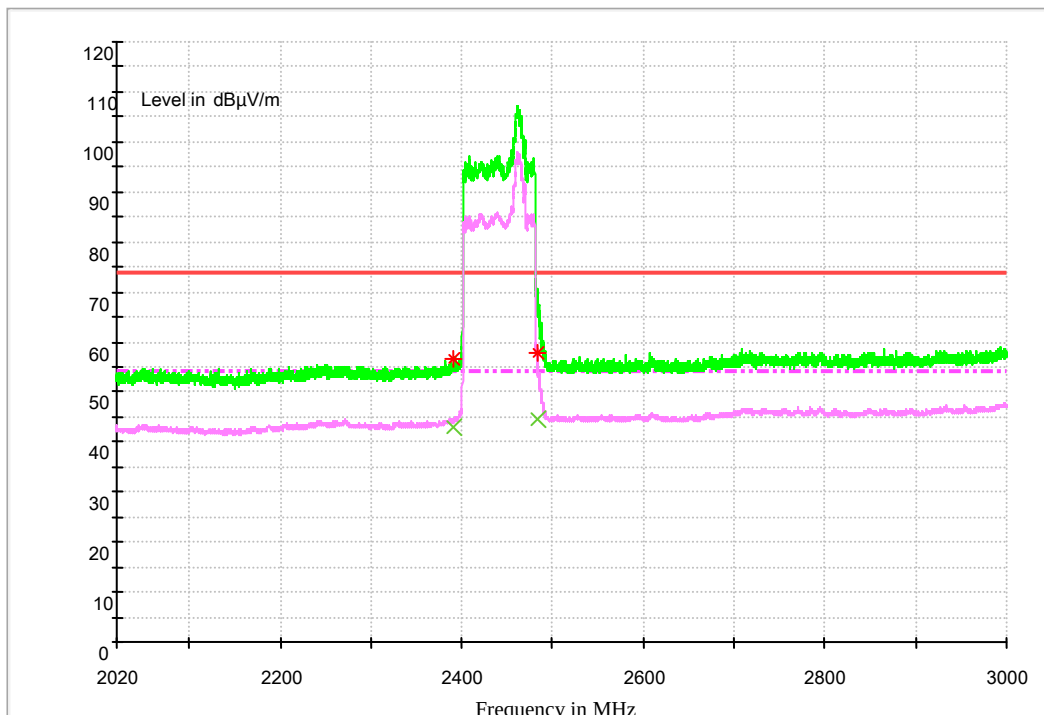

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	56.5	38.3	74.0	17.5	100.0	177.0	VERTICAL
2483.500000	57.9	40.5	74.0	16.1	100.0	107.0	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	42.9	38.3	54.0	11.1	100.0	222.0	VERTICAL
2483.500000	44.6	40.5	54.0	9.4	100.0	107.0	VERTICAL

Test Mode: 11G_L@Ant 2

Channel 1

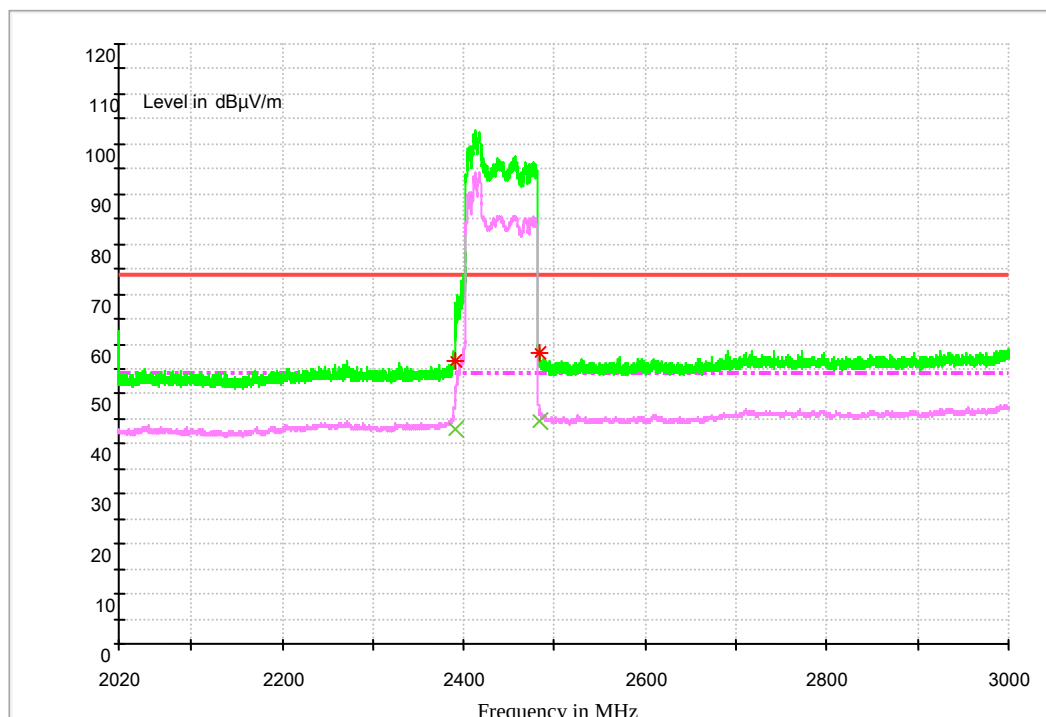

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	56.7	38.3	74.0	17.3	100.0	327.0	VERTICAL
2483.500000	58.3	40.2	74.0	15.8	100.0	311.0	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	42.9	38.3	54.0	11.1	100.0	327.0	VERTICAL
2483.500000	44.4	40.2	54.0	9.6	100.0	356.0	VERTICAL

Test Mode: 11G_H@Ant 2

Channel 11

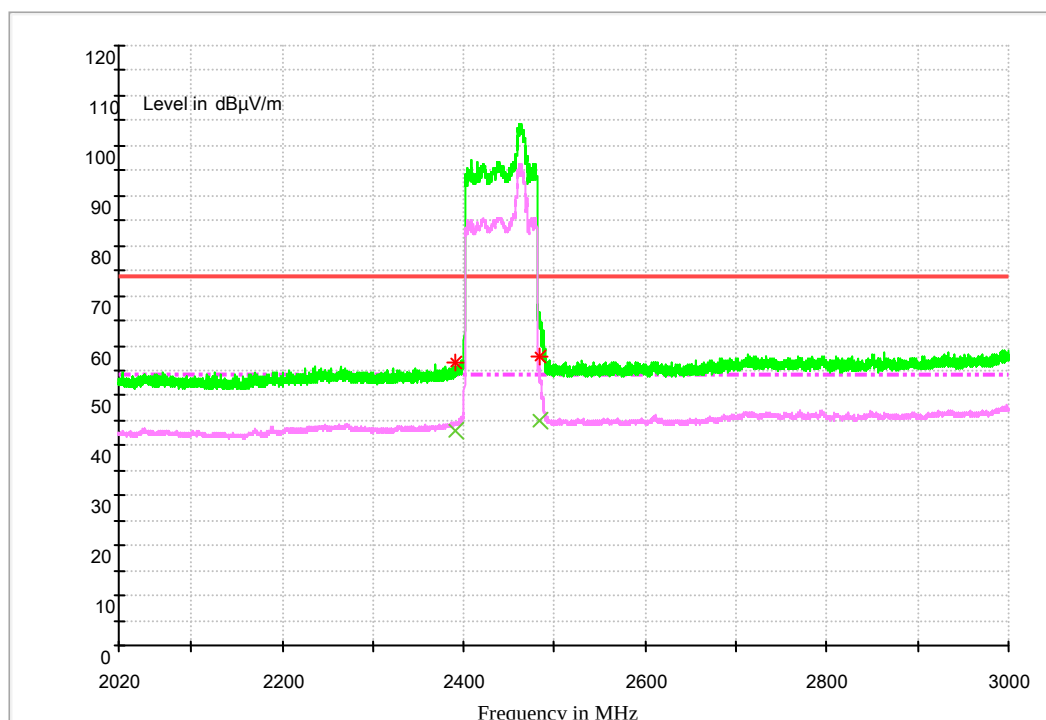

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	56.6	38.3	74.0	17.4	100.0	233.0	VERTICAL
2483.500000	58.0	40.3	74.0	16.0	100.0	270.0	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	42.9	38.3	54.0	11.1	100.0	269.0	VERTICAL
2483.500000	44.8	40.7	54.0	9.2	100.0	315.0	VERTICAL

Test Mode: 11N20m_L

Channel 1

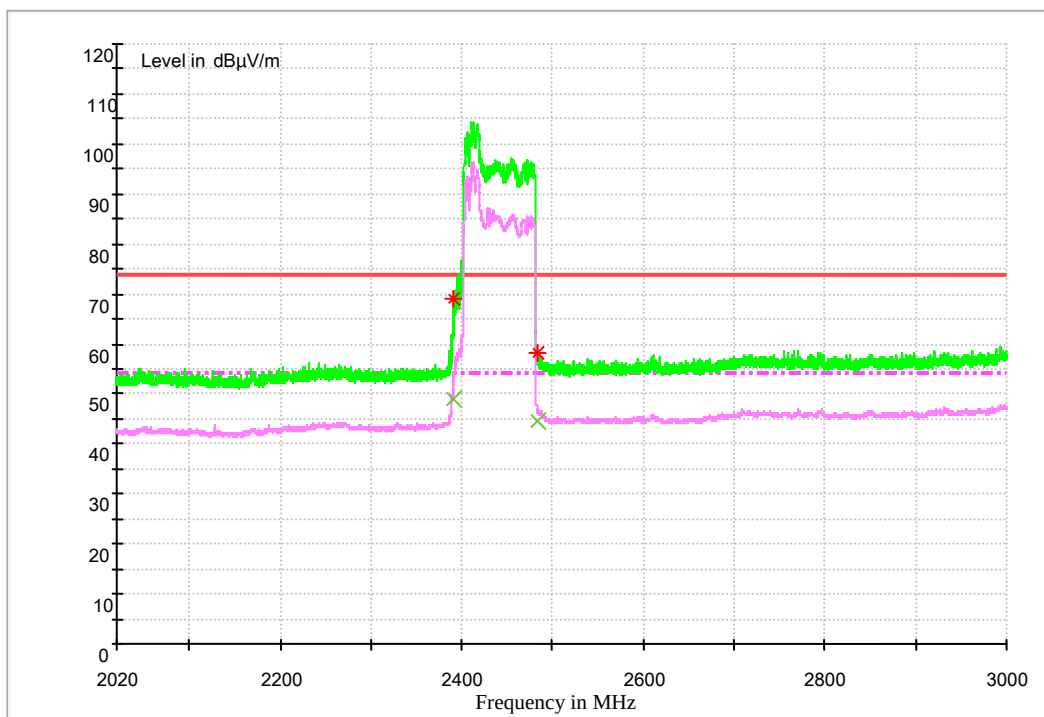

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	69.1	38.3	74.0	4.9	100.0	71.0	VERTICAL
2483.500000	58.0	40.5	74.0	16.0	100.0	125.0	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.8	38.3	54.0	5.2	100.0	92.0	VERTICAL
2483.500000	44.5	40.4	54.0	9.5	100.0	161.0	VERTICAL

Test Mode: 11N20m_H

Channel 11

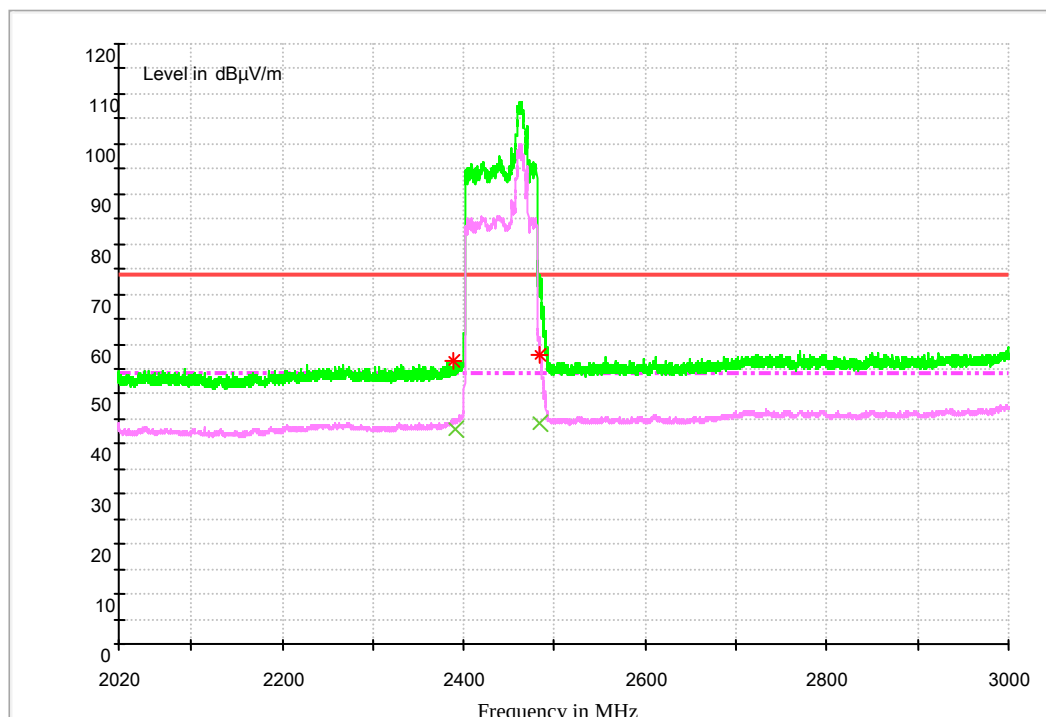

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	56.8	38.3	74.0	17.2	100.0	33.0	HORIZONTAL
2483.500000	57.8	40.4	74.0	16.2	100.0	123.0	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	43.0	38.3	54.0	11.0	100.0	335.0	VERTICAL
2483.500000	44.3	40.2	54.0	9.7	100.0	70.0	VERTICAL

Test Mode: 11N40m_L

Channel 3

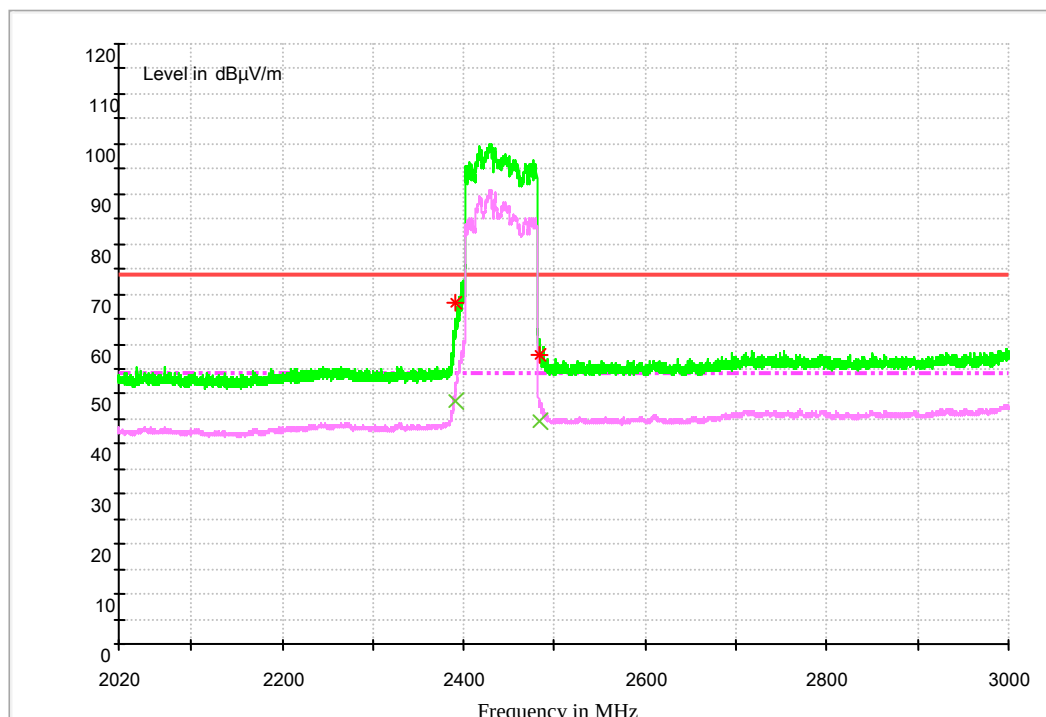

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	68.2	38.3	74.0	5.8	100.0	115.0	VERTICAL
2483.500000	58.0	40.2	74.0	16.0	100.0	122.0	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.5	38.3	54.0	5.5	100.0	122.0	VERTICAL
2483.500000	44.4	40.4	54.0	9.6	100.0	153.0	VERTICAL

Test Mode: 11N40m_H

Channel 9

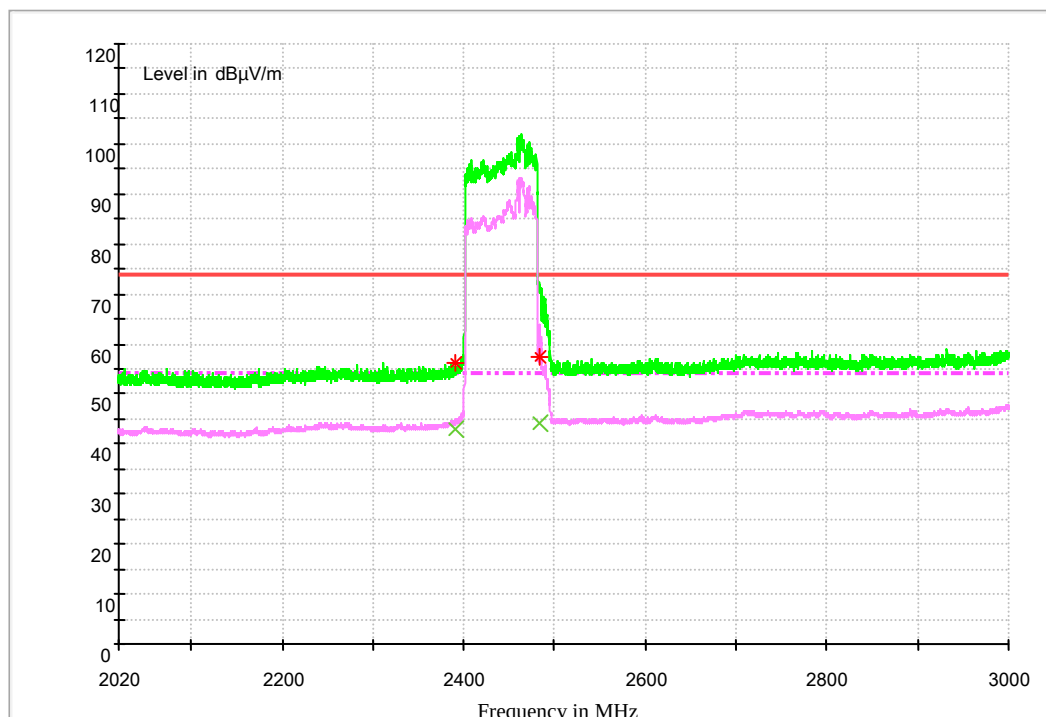

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	56.3	38.3	74.0	17.7	100.0	6.0	HORIZONTAL
2483.500000	57.6	40.2	74.0	16.4	100.0	122.0	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	42.8	38.3	54.0	11.2	100.0	39.0	HORIZONTAL
2483.500000	44.2	40.1	54.0	9.8	100.0	124.0	VERTICAL

Part 4: Testing Range of “1 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “1 GHz to 18 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “1 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

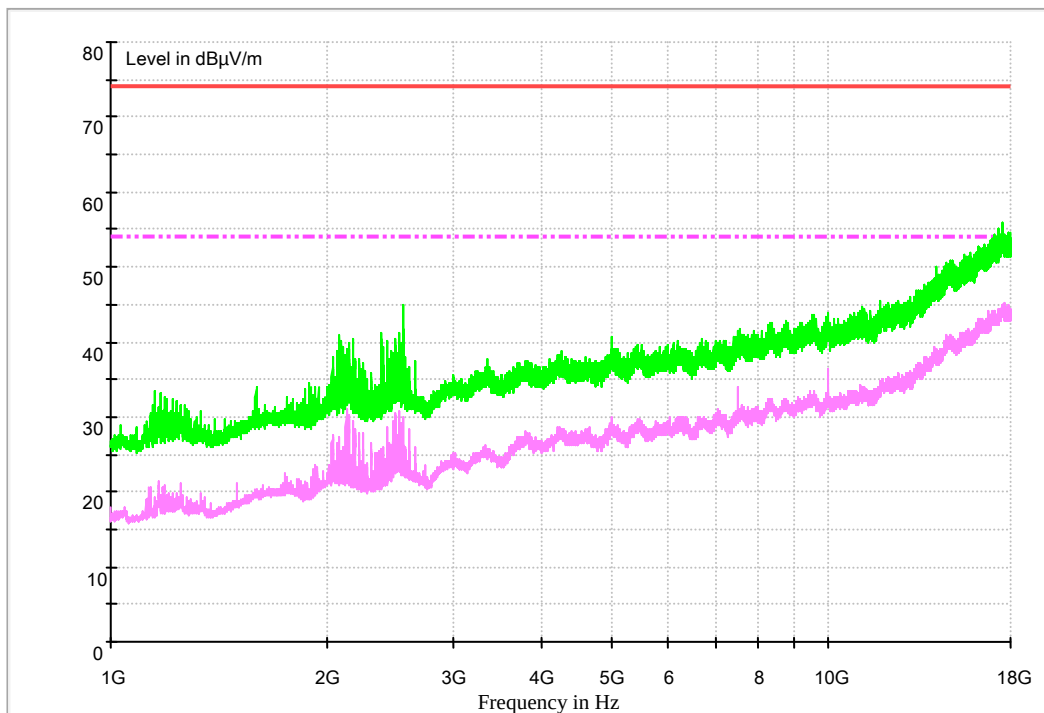


Appendix H: Conducted Emission at Power Port

Note: RBW =9 kHz, VBW = 30 kHz

Channel 6

CLASS B Voltage with ENV216

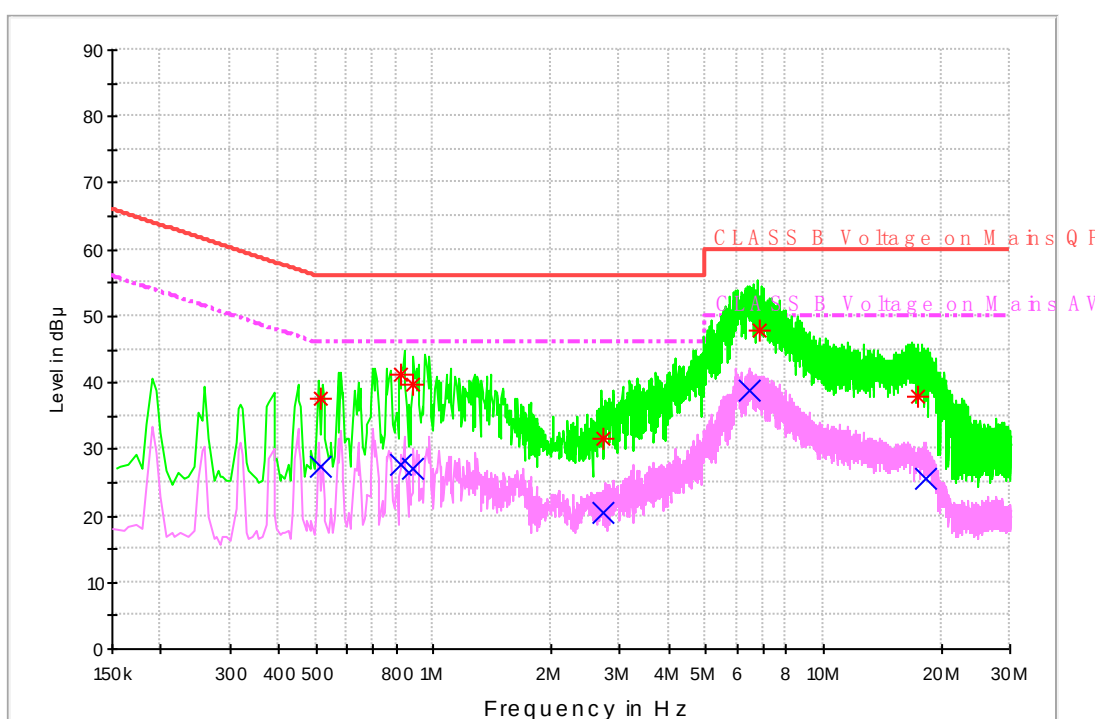

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Line	Transd dB	Margin dB	Limit dBμV	PE
4.597342	32.7	L1	9.8	23.3	56.0	FLO
5.762066	34.3	N	9.8	25.7	60.0	FLO
7.329218	34.6	L1	9.9	25.4	60.0	FLO
9.175512	33.9	L1	9.9	26.1	60.0	FLO
10.961898	34.0	L1	9.9	26.0	60.0	FLO
12.638190	36.4	L1	10.0	23.6	60.0	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV	Line	Transd dB	Margin dB	Limit dBμV	PE
4.469026	26.4	N	9.8	19.6	46.0	FLO
5.815751	26.8	L1	9.8	23.2	50.0	FLO
7.256054	27.2	L1	9.9	22.8	50.0	FLO
9.089820	26.5	N	9.9	23.5	50.0	FLO
10.810856	26.5	N	9.9	23.5	50.0	FLO
12.822015	28.4	N	10.0	21.6	50.0	FLO

END