

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	15
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (9K TO 30MHz)	18
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	18
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	18
5 . MEASUREMENT INSTRUMENTS LIST	19
ATTACHMENT A - CONDUCTED EMISSION	20
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	27
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	40
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	89

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-4-1701C220	Original Issue.	Feb. 20, 2017

1. CERTIFICATION

Equipment : HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)
Brand Name : HUAWEI
Model Name : BG2-W09
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Jan. 23, 2017 ~ Feb. 17, 2017
Test Sample : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-4-1701C220) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the RSE part of RLAN 5G.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	1.94

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz~30MHz	V	3.79
		9kHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.60
		200MHz ~ 1,000MHz	V	3.86
		200MHz ~ 1,000MHz	H	3.94
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	
Brand Name	HUAWEI	
Model Name	BG2-W09	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	150Mbps
Power Source	#1 DC voltage supplied from adapter. #2 Supplied from battery.	
Power Rating	#1 ~100V~240V~ #2 DC 3.8V 3000mAh	
HW Version	SH1BG2W09LM	
SW Version	BG2-W09C128B001T01-log	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- The EUT contains following accessory devices

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB396481EBC
Earphone	JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD	22040150
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD	22040150
	Goer Tek Inc	22040150
USB Cable	Shenzhen Luxshare Precision Industry Co.,Ltd.	L99U2017-CS-H
	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC304-DH
	HONGLIN TECHNOLOGY CO.,LTD	130-26988
Adapter	DONGGUAN PHITEK ELECTRONICS CO.,LTD.	HW-050100U01
	SHENZHEN HUNTKEY ELECTRONIC CO.,LTD.	HW-050100A01 HW-050100E01
	HUIZHOU BYD ELECTRONIC CO., LTD.	HW-050100B01

3. Channel List:

UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270
56	5280	62	5310
60	5300		
64	5320		

UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510
104	5520	110	5550
108	5540	118	5590
112	5560	126	5630
116	5580	134	5670
132	5660		
136	5680		
140	5700		

UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX A Mode / CH52, CH64 (UNII-2A)
Mode 5	TX N20 Mode / CH52, CH64 (UNII-2A)
Mode 6	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 7	TX A Mode / CH100, CH140 (UNII-2C)
Mode 8	TX N20 Mode / CH100, CH140 (UNII-2C)
Mode 9	TX N40 Mode / CH102, CH134 (UNII-2C)
Mode 10	TX A Mode / CH149,CH165 (UNII-3)
Mode 11	TX N20 Mode / CH149,CH165 (UNII-3)
Mode 12	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 13	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:


For Conducted Test	
Final Test Mode	Description
Mode 13	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX A Mode / CH52, CH64 (UNII-2A)
Mode 5	TX N20 Mode / CH52, CH64 (UNII-2A)
Mode 6	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 7	TX A Mode / CH100, CH140 (UNII-2C)
Mode 8	TX N20 Mode / CH100, CH140 (UNII-2C)
Mode 9	TX N40 Mode / CH102, CH134 (UNII-2C)
Mode 10	TX A Mode / CH149,CH165 (UNII-3)
Mode 11	TX N20 Mode / CH149,CH165 (UNII-3)
Mode 12	TX N40 Mode / CH151,CH159 (UNII-3)

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

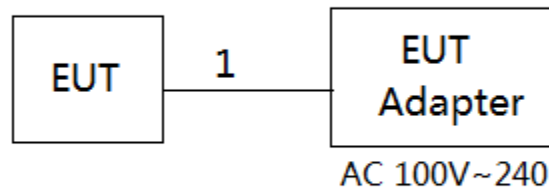

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	USB Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

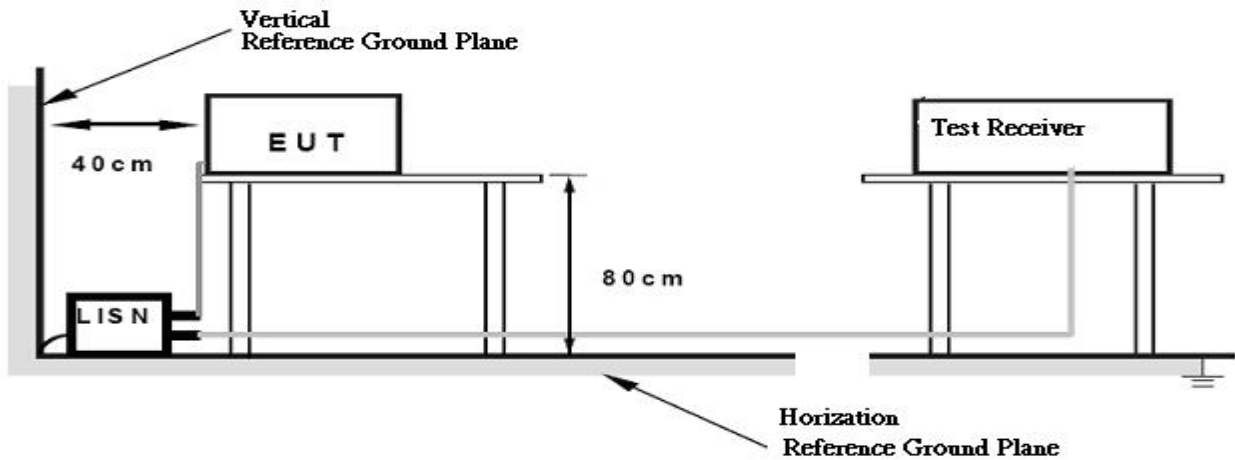

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequencies (MHz)	EIRP Limit (dBm)	Band edge at 3m (dBμV/m)	Harmonic at 1.5m (dBμV/m)
5150-5250	-27	68.3	74.3 (Note 3)
5250-5350	-27	68.3	74.3 (Note 3)
5470-5725	-27	68.3	74.3 (Note 3)
5725-5850	-27(Note 2)	68.3	74.3 (Note 3)
	10(Note 2)	105.3	111.3(Note 3)
	15.6(Note 2)	110.9	116.9(Note 3)
	27(Note 2)	122.3	128.3(Note 3)

Note:

- The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts)
- According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

3. $20 \log d_{\text{limit}}/d_{\text{measure}} = 20 \log 3/1.5 = 6 \text{dB}$.

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A)Radiated Emission Test Set-Up Frequency Below 1GHz

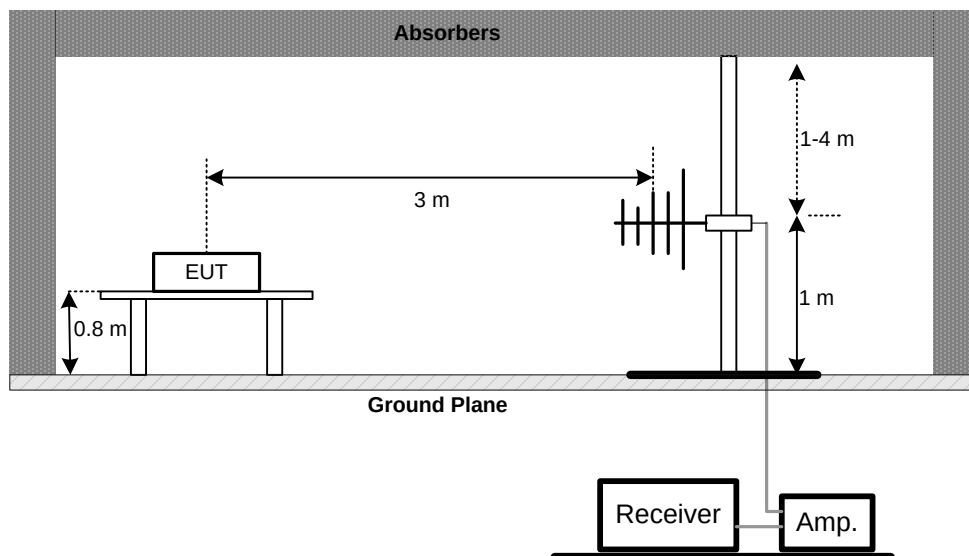


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz


Band edge

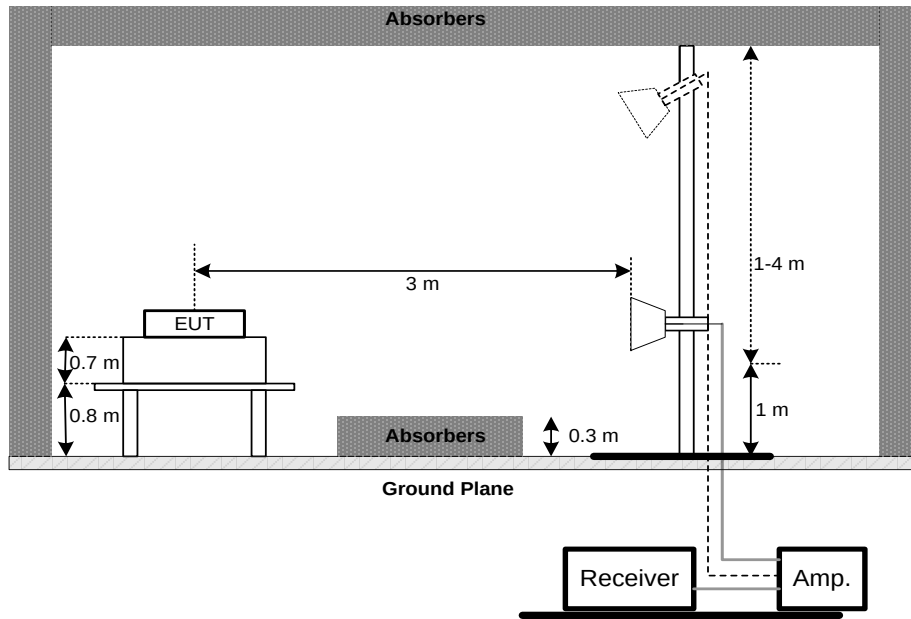

Harmonic

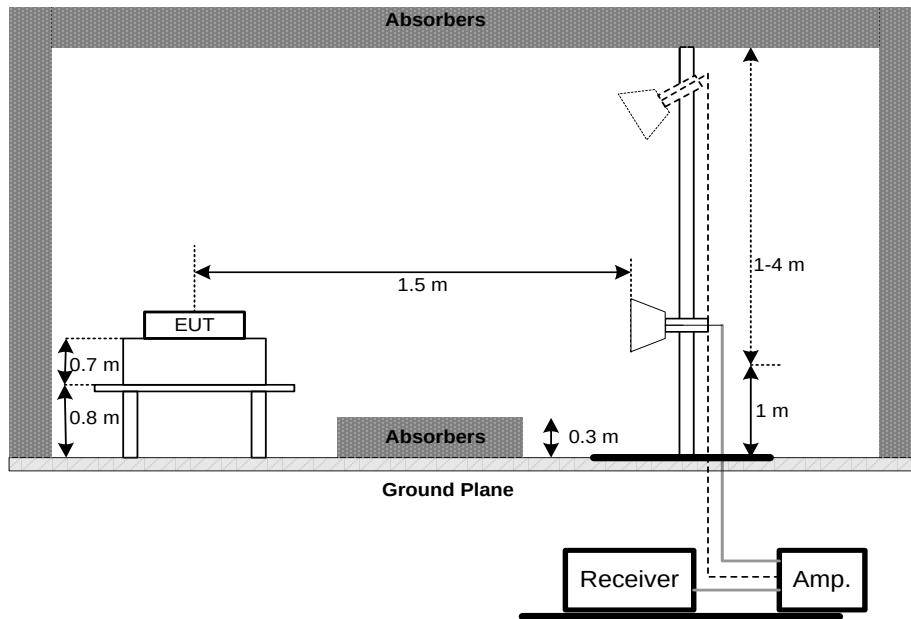

(C) Radiated emissions below 30MHz

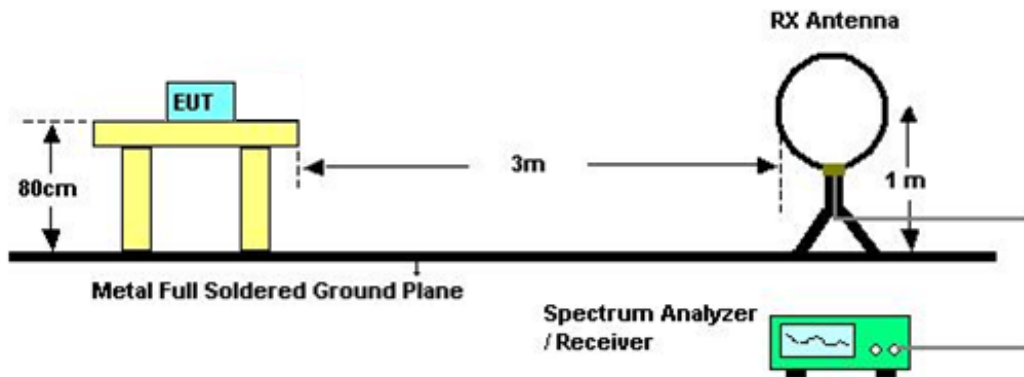

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 08, 2017
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 26, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2017
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
10	Test Cable	emci	EMC104-SM-S M-10000(1GHz – 26.5GHz)	C-68	Jun. 26, 2017
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
13	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
15	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode_Adapter: BYD


Line

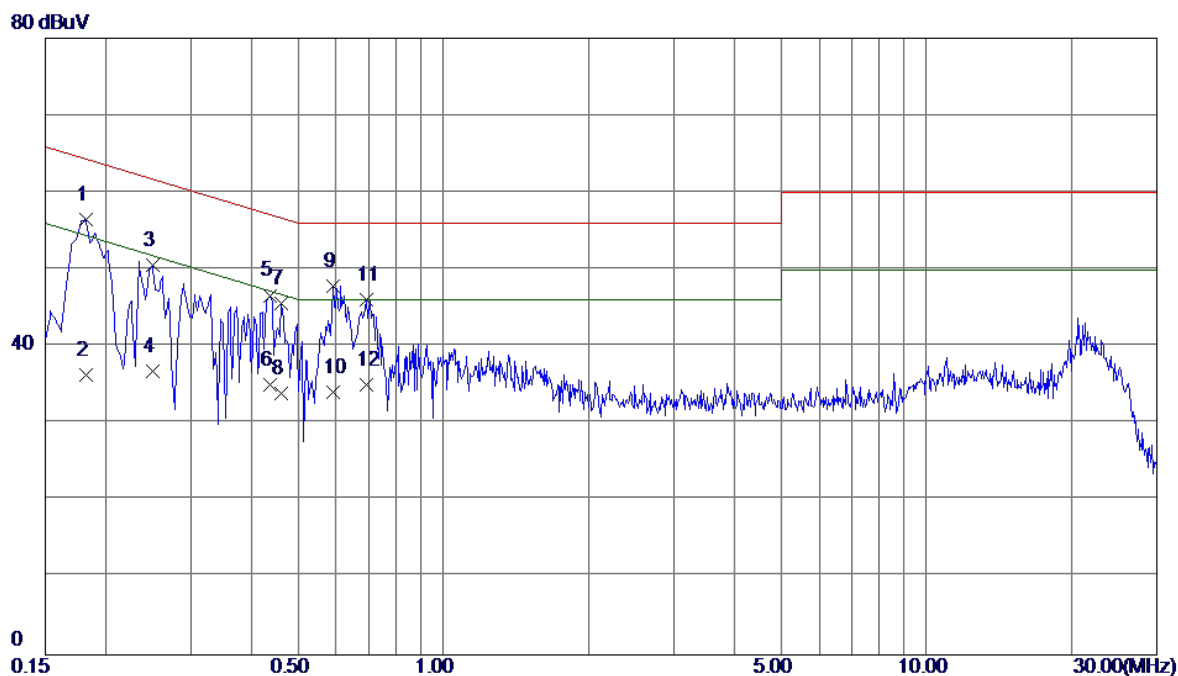

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1819	46.98	9.57	56.55	64.40	-7.85	Peak	
2	0.1819	26.80	9.57	36.37	54.40	-18.03	AVG	
3	0.2500	41.01	9.57	50.58	61.76	-11.18	Peak	
4	0.2500	27.16	9.57	36.73	51.76	-15.03	AVG	
5	0.4380	37.02	9.62	46.64	57.10	-10.46	Peak	
6	0.4380	25.40	9.62	35.02	47.10	-12.08	AVG	
7	0.4620	35.88	9.65	45.53	56.66	-11.13	Peak	
8	0.4620	24.32	9.65	33.97	46.66	-12.69	AVG	
9	0.5899	38.08	9.70	47.78	56.00	-8.22	Peak	
10	0.5899	24.33	9.70	34.03	46.00	-11.97	AVG	
11	0.6940	36.31	9.71	46.02	56.00	-9.98	Peak	
12	0.6940	25.36	9.71	35.07	46.00	-10.93	AVG	

Test Mode: TX Mode_Adapter: BYD


Neutral

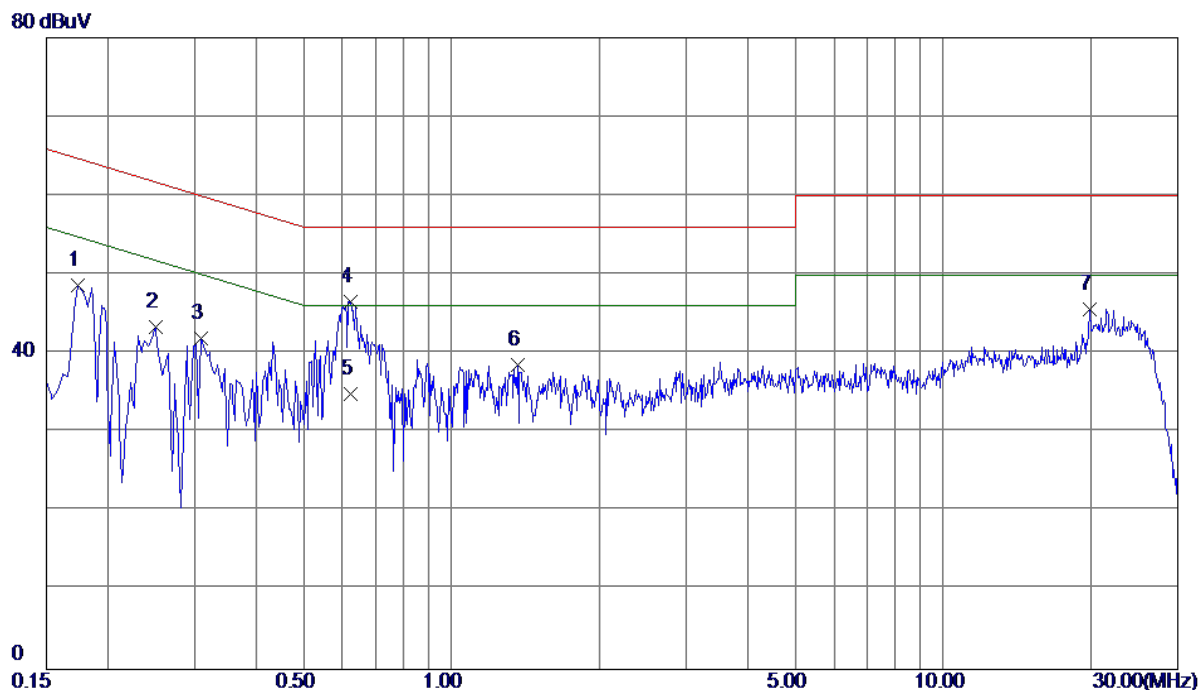

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1740	39.19	9.48	48.67	64.77	-16.10	Peak	
2	0.2500	33.81	9.57	43.38	61.76	-18.38	Peak	
3	0.3100	32.41	9.58	41.99	59.97	-17.98	Peak	
4 *	0.6220	37.11	9.50	46.61	56.00	-9.39	Peak	
5	0.6220	25.32	9.50	34.82	46.00	-11.18	AVG	
6	1.3660	28.79	9.77	38.56	56.00	-17.44	Peak	
7	19.8620	34.69	10.89	45.58	60.00	-14.42	Peak	

Test Mode: TX Mode _ Adapter: HUNTKEY


Line

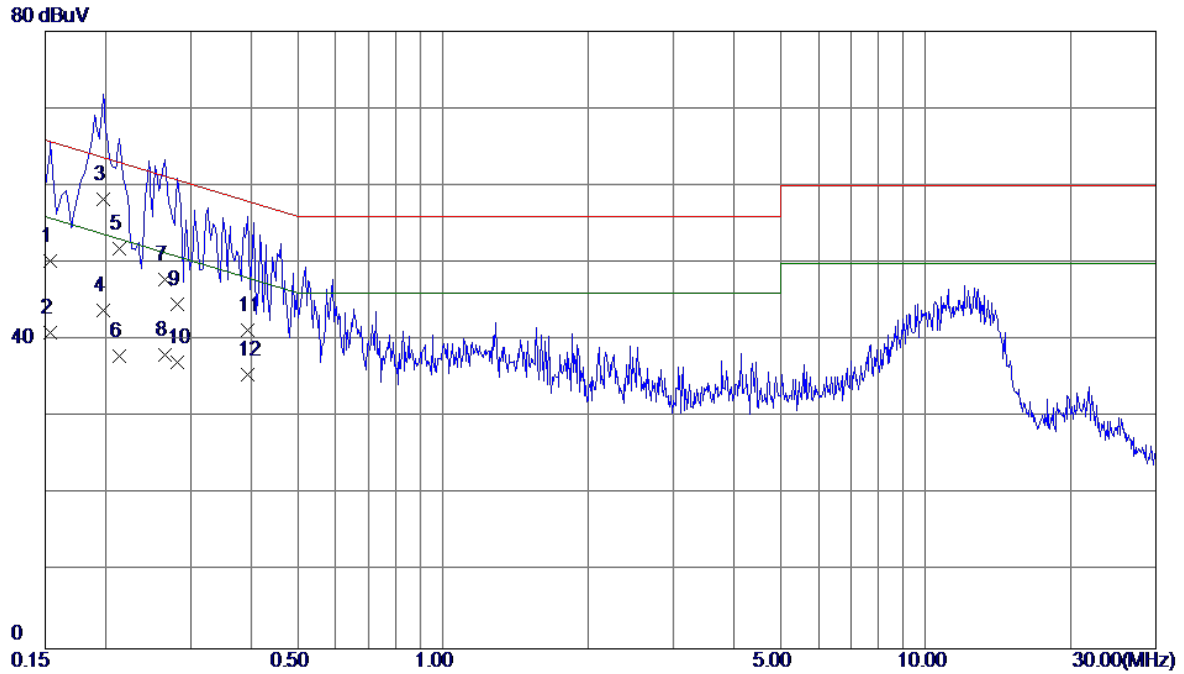

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1539	40.70	9.57	50.27	65.79	-15.52	QP	
2	0.1539	31.40	9.57	40.97	55.79	-14.82	AVG	
3 *	0.1980	48.60	9.57	58.17	63.69	-5.52	QP	
4	0.1980	34.30	9.57	43.87	53.69	-9.82	AVG	
5	0.2140	42.30	9.57	51.87	63.05	-11.18	QP	
6	0.2140	28.40	9.57	37.97	53.05	-15.08	AVG	
7	0.2660	38.20	9.57	47.77	61.24	-13.47	QP	
8	0.2660	28.50	9.57	38.07	51.24	-13.17	AVG	
9	0.2819	35.00	9.58	44.58	60.76	-16.18	QP	
10	0.2819	27.60	9.58	37.18	50.76	-13.58	AVG	
11	0.3940	31.70	9.58	41.28	57.98	-16.70	QP	
12	0.3940	25.90	9.58	35.48	47.98	-12.50	AVG	

Test Mode: TX Mode _ Adapter: HUNTKEY


Neutral

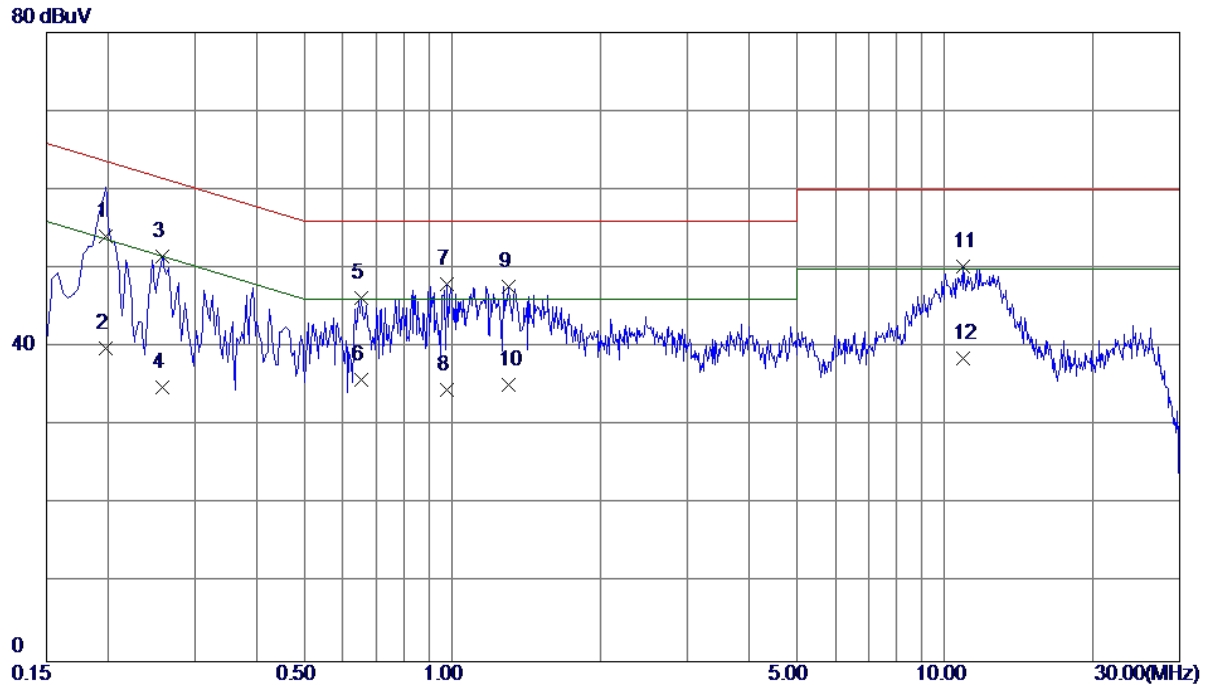

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1980	44.50	9.56	54.06	63.69	-9.63	QP	
2	0.1980	30.30	9.56	39.86	53.69	-13.83	AVG	
3	0.2580	42.02	9.57	51.59	61.50	-9.91	Peak	
4	0.2580	25.30	9.57	34.87	51.50	-16.63	AVG	
5	0.6540	36.78	9.51	46.29	56.00	-9.71	Peak	
6	0.6540	26.30	9.51	35.81	46.00	-10.19	AVG	
7 *	0.9740	38.27	9.74	48.01	56.00	-7.99	Peak	
8	0.9740	24.80	9.74	34.54	46.00	-11.46	AVG	
9	1.2980	37.93	9.76	47.69	56.00	-8.31	Peak	
10	1.2980	25.50	9.76	35.26	46.00	-10.74	AVG	
11	10.9260	39.70	10.61	50.31	60.00	-9.69	Peak	
12	10.9260	27.90	10.61	38.51	50.00	-11.49	AVG	

Test Mode: TX Mode _ Adapter: PHITEK


Line

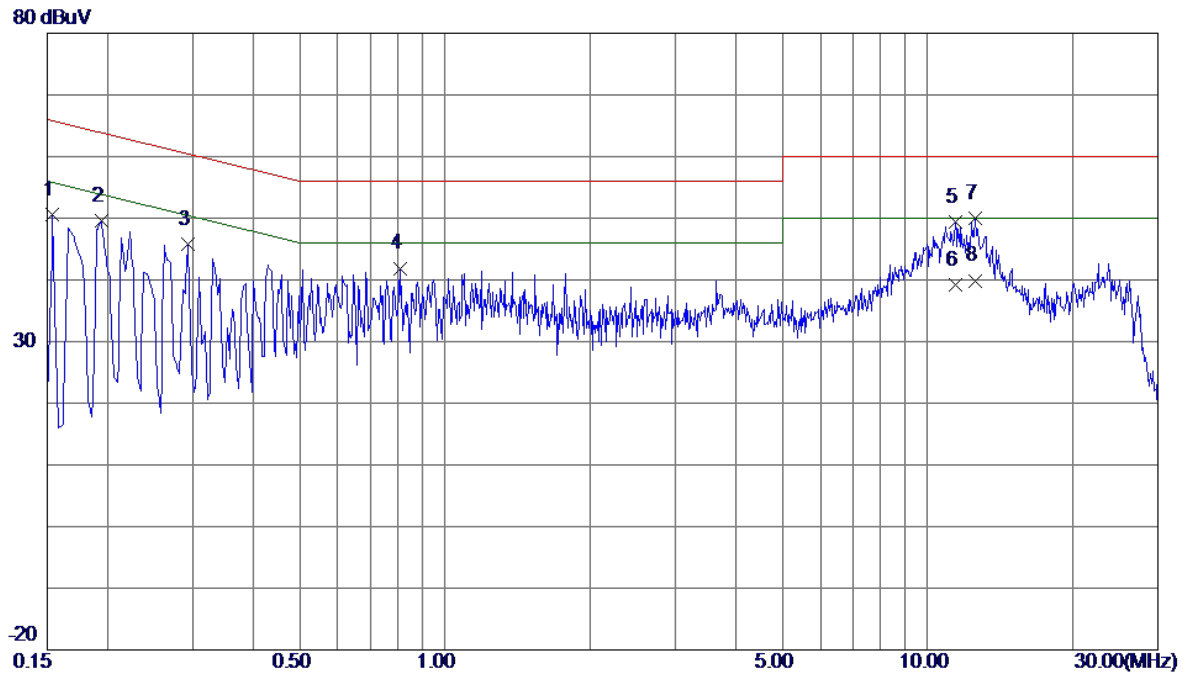

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1539	41.02	9.57	50.59	65.79	-15.20	Peak	
2	0.1940	40.01	9.57	49.58	63.86	-14.28	Peak	
3	0.2940	36.24	9.58	45.82	60.41	-14.59	Peak	
4	0.8059	32.08	9.82	41.90	56.00	-14.10	Peak	
5	11.4060	38.85	10.55	49.40	60.00	-10.60	Peak	
6	11.4060	28.60	10.55	39.15	50.00	-10.85	AVG	
7 *	12.5620	39.34	10.60	49.94	60.00	-10.06	Peak	
8	12.5620	29.30	10.60	39.90	50.00	-10.10	AVG	

Test Mode: TX Mode _ Adapter: PHITEK

Neutral

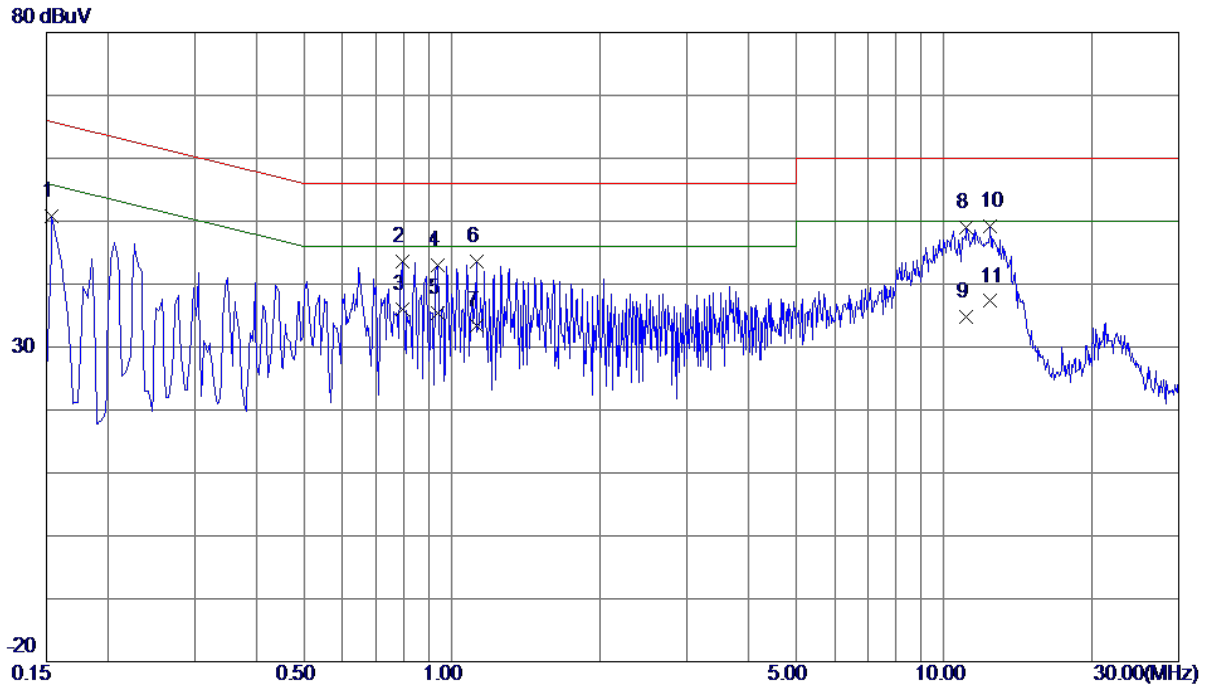


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1539	41.28	9.55	50.83	65.79	-14.96	Peak	
2	0.7940	34.05	9.61	43.66	56.00	-12.34	Peak	
3 *	0.7940	26.32	9.61	35.93	46.00	-10.07	AVG	
4	0.9340	33.18	9.73	42.91	56.00	-13.09	Peak	
5	0.9340	25.63	9.73	35.36	46.00	-10.64	AVG	
6	1.1220	33.77	9.75	43.52	56.00	-12.48	Peak	
7	1.1220	23.60	9.75	33.35	46.00	-12.65	AVG	
8	11.1100	38.38	10.61	48.99	60.00	-11.01	Peak	
9	11.1100	24.21	10.61	34.82	50.00	-15.18	AVG	
10	12.4060	38.50	10.64	49.14	60.00	-10.86	Peak	
11	12.4060	26.66	10.64	37.30	50.00	-12.70	AVG	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode_Adapter: BYD


Ant 0°

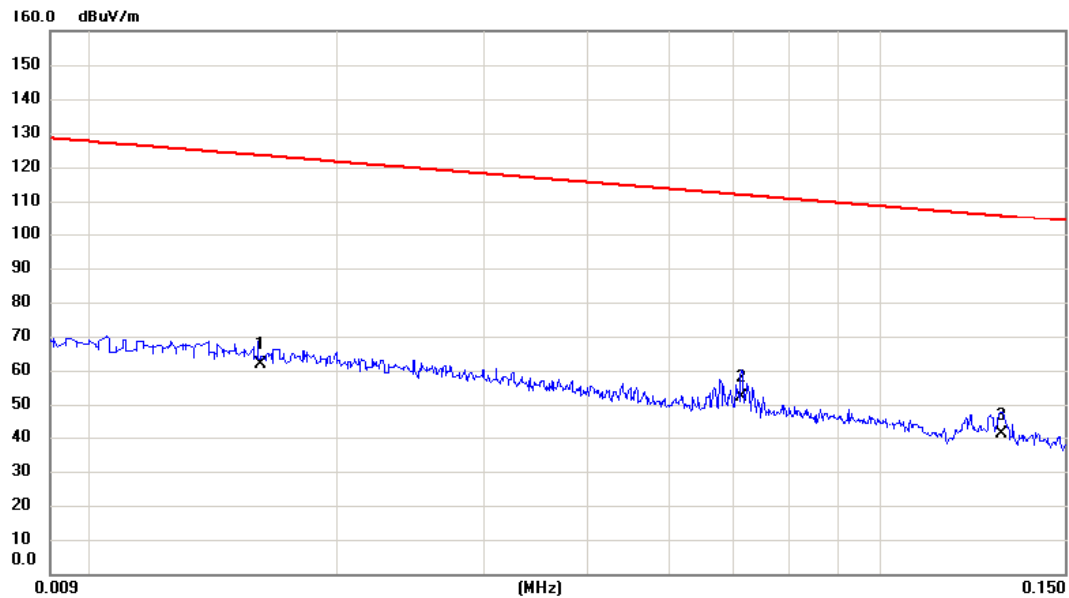

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.016	38.02	23.75	61.77	123.47	-61.70	AVG	
2	*	0.061	32.66	19.69	52.35	111.86	-59.51	AVG	
3		0.126	22.34	18.60	40.94	105.60	-64.66	AVG	

Test Mode: TX Mode_Adapter: BYD


Ant 0°

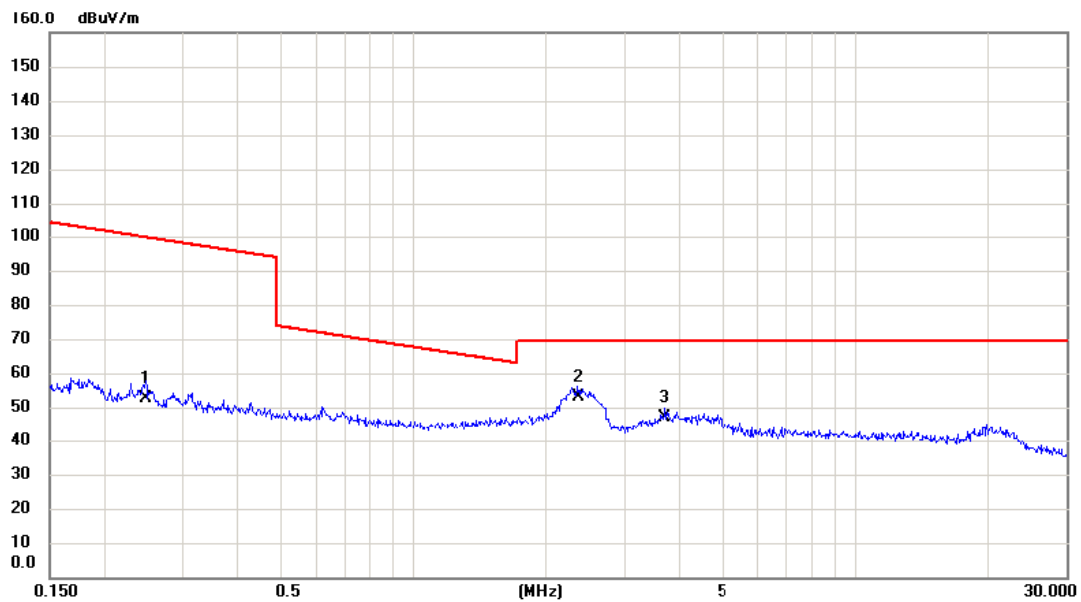

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.248	33.95	18.65	52.60	99.71	-47.11	AVG	
2	*	2.358	35.76	17.44	53.20	69.54	-16.34	QP	
3		3.700	28.76	18.12	46.88	69.54	-22.66	QP	

Test Mode: TX Mode_Adapter: BYD


Ant 90°

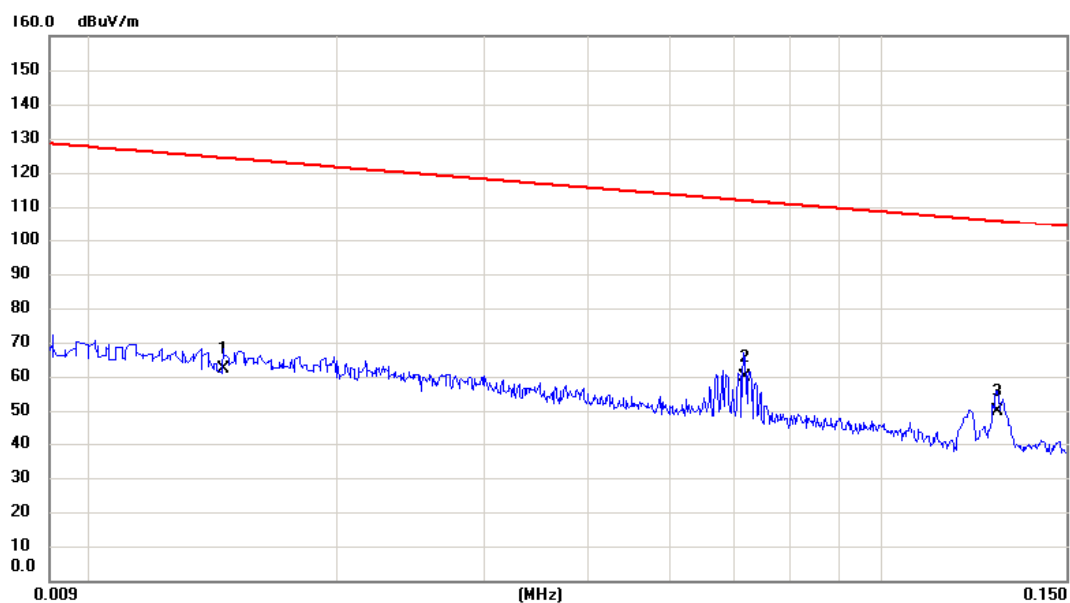

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.015	38.32	23.84	62.16	124.32	-62.16	AVG	
2	*	0.062	40.26	19.69	59.95	111.80	-51.85	AVG	
3		0.124	31.17	18.57	49.74	105.74	-56.00	AVG	

Test Mode: TX Mode_Adapter: BYD


Ant 90°

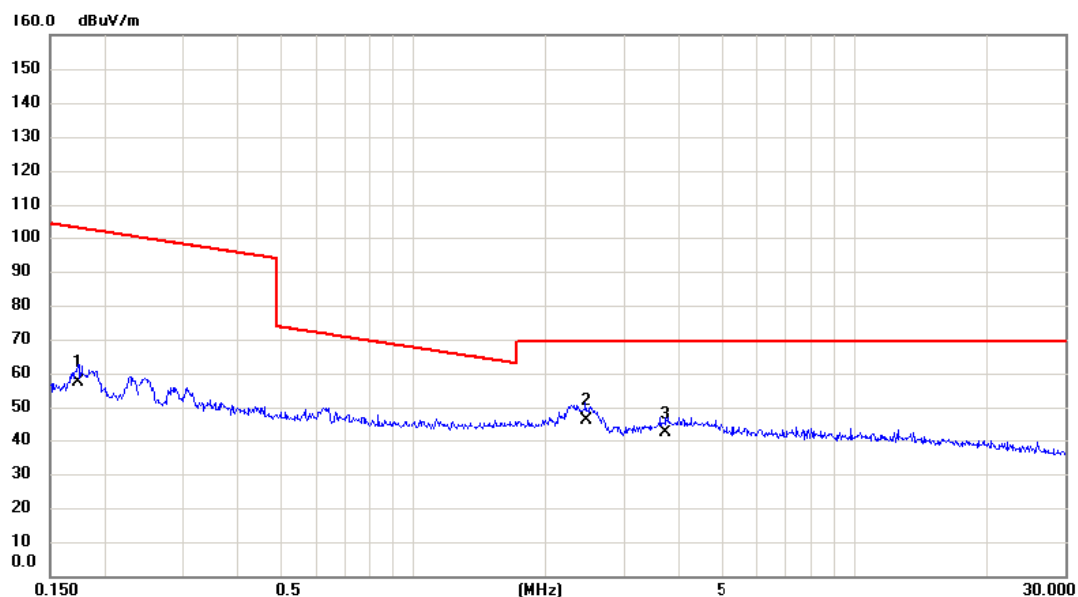

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.173	38.77	18.72	57.49	102.84	-45.35	AVG	
2	*	2.461	29.02	17.32	46.34	69.54	-23.20	QP	
3		3.720	23.96	18.16	42.12	69.54	-27.42	QP	

Test Mode: TX Mode _ Adapter: HUNTKEY


Ant 0°

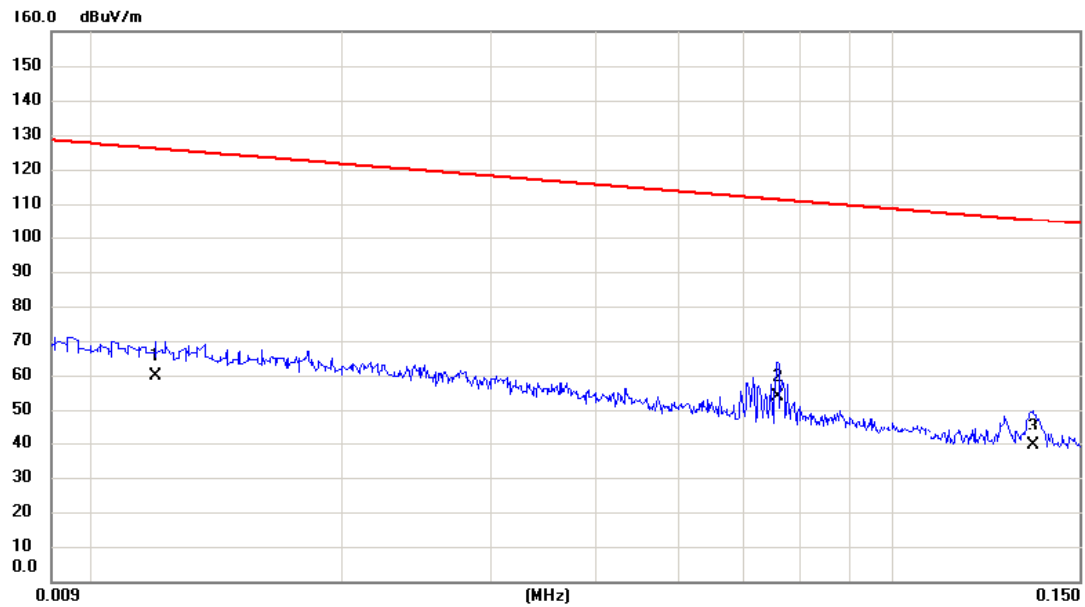

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.012	35.89	24.00	59.89	126.02	-66.13	AVG	
2	*	0.066	33.98	19.64	53.62	111.24	-57.62	AVG	
3		0.132	20.97	18.63	39.60	105.18	-65.58	AVG	

Test Mode: TX Mode _ Adapter: HUNTKEY


Ant 0°

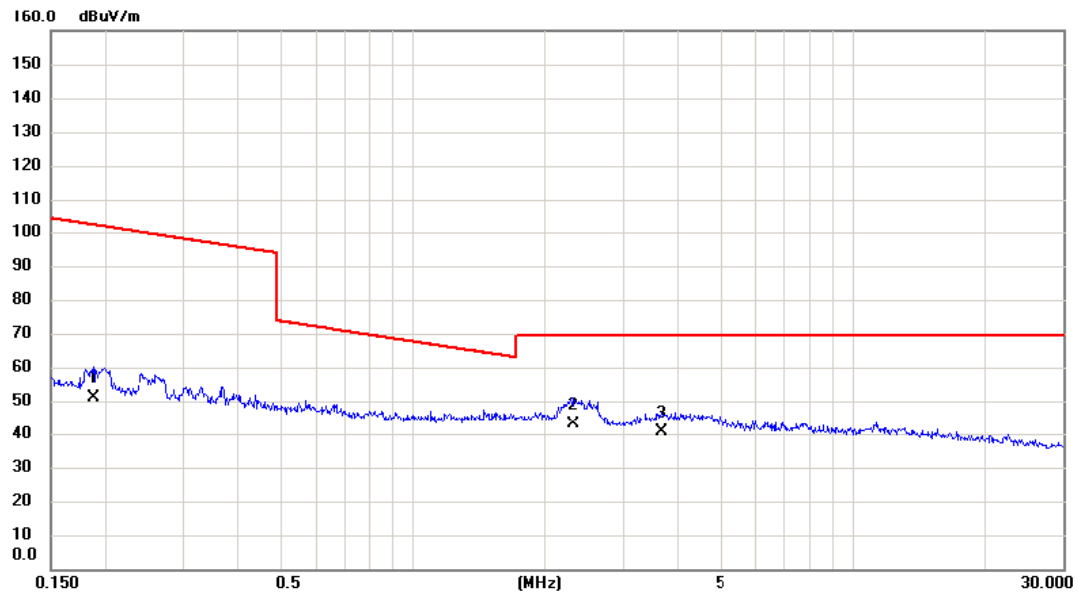

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.187	32.34	18.70	51.04	102.15	-51.11	AVG	
2	*	2.321	25.55	17.49	43.04	69.54	-26.50	QP	
3		3.661	22.66	18.04	40.70	69.54	-28.84	QP	

Test Mode:	TX Mode _ Adapter: HUNTKEY
------------	----------------------------


Ant 90°

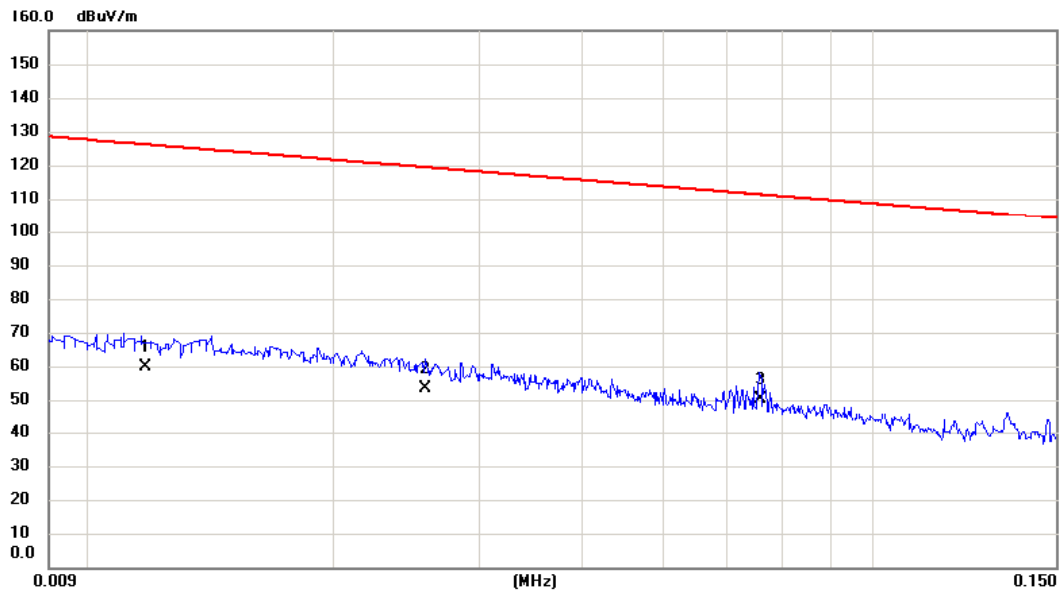

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.012	35.92	24.01	59.93	126.17	-66.24	AVG	
2		0.026	30.59	22.80	53.39	119.37	-65.98	AVG	
3	*	0.066	30.53	19.64	50.17	111.24	-61.07	AVG	

Test Mode: TX Mode _ Adapter: HUNTKEY


Ant 90°

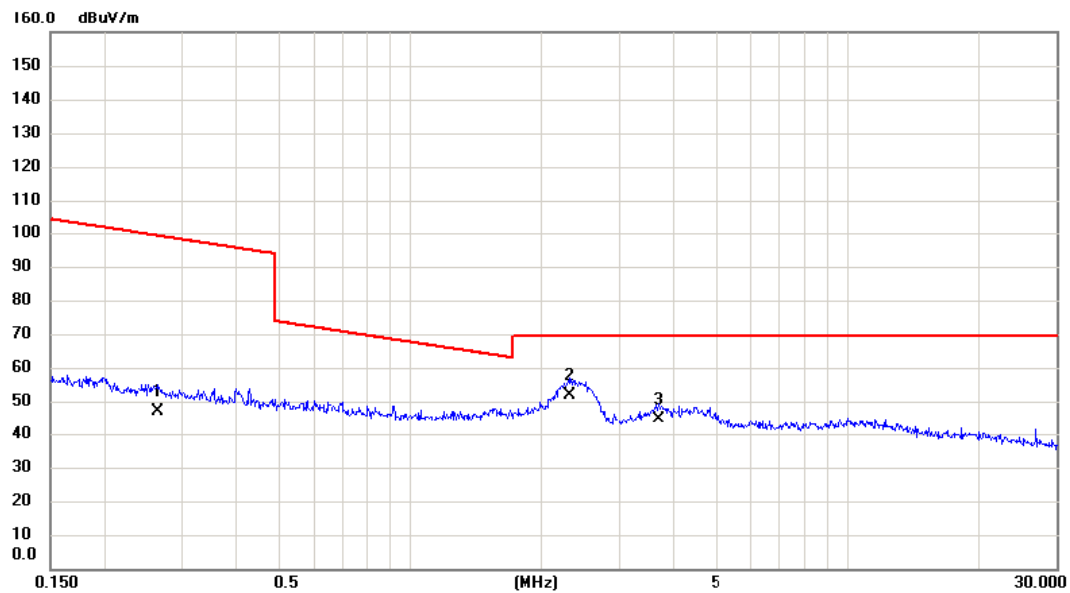

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.266	28.44	18.63	47.07	99.11	-52.04	AVG	
2 *	2.309	34.42	17.51	51.93	69.54	-17.61	QP	
3	3.700	26.47	18.12	44.59	69.54	-24.95	QP	

Test Mode: TX Mode _ Adapter: PHITEK


Ant 0°

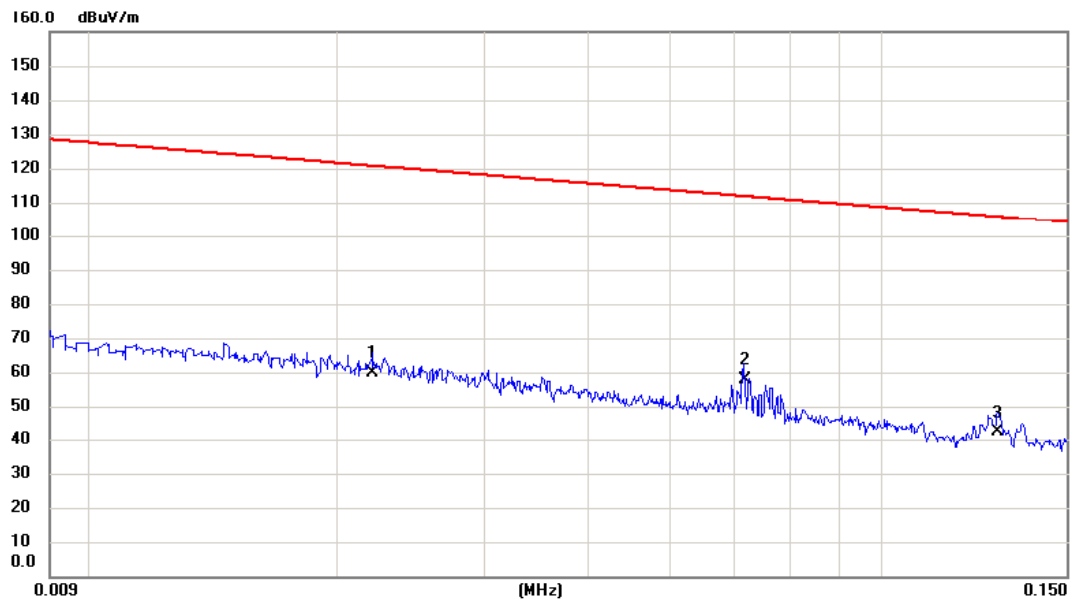

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
1		0.022	36.39	23.27	59.66	120.76	-61.10	AVG	
2	*	0.062	38.08	19.69	57.77	111.80	-54.03	AVG	
3		0.124	23.76	18.58	42.34	105.73	-63.39	AVG	

Test Mode: TX Mode _ Adapter: PHITEK


Ant 0°

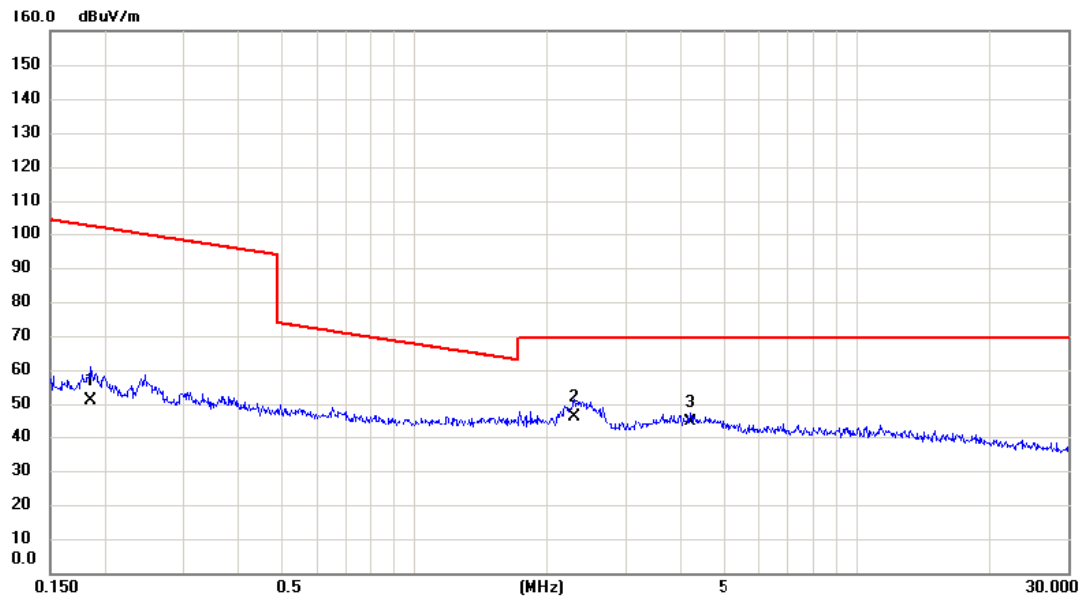

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.185	32.37	18.70	51.07	102.25	-51.18	AVG	
2	*	2.297	28.87	17.52	46.39	69.54	-23.15	QP	
3		4.202	26.22	18.34	44.56	69.54	-24.98	QP	

Test Mode: TX Mode _ Adapter: PHITEK


Ant 90°

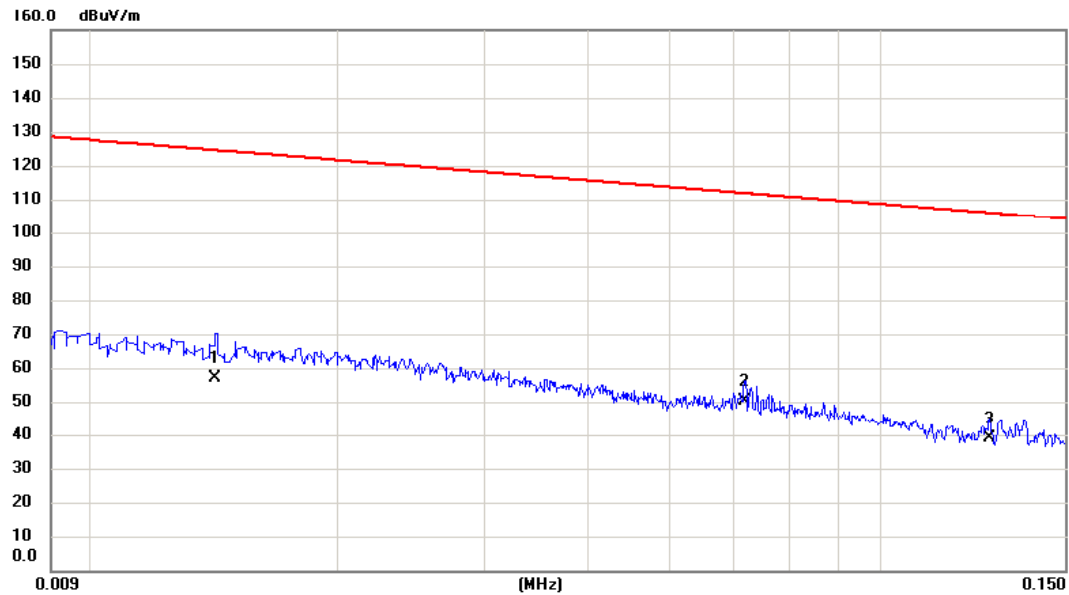

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.014	33.00	23.87	56.87	124.56	-67.69	AVG	
2	*	0.062	30.54	19.69	50.23	111.79	-61.56	AVG	
3		0.122	20.26	18.56	38.82	105.89	-67.07	AVG	

Test Mode: TX Mode _ Adapter: PHITEK

Ant 90°

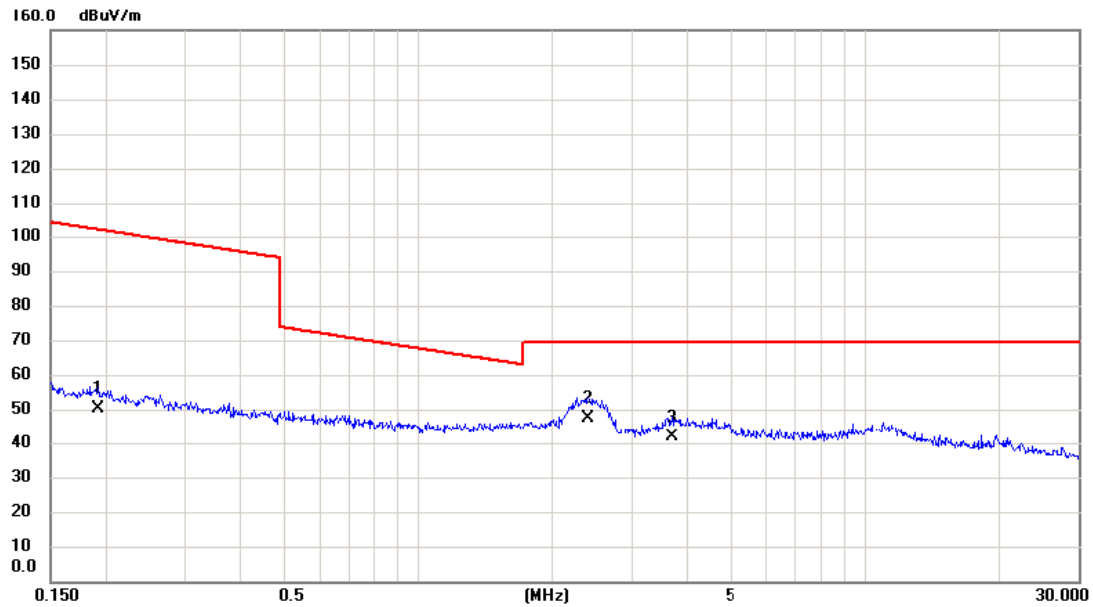


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.191	31.38	18.70	50.08	101.97	-51.89	AVG	
2 *	2.396	30.13	17.39	47.52	69.54	-22.02	QP	
3	3.681	23.69	18.08	41.77	69.54	-27.77	QP	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz _ Adapter: BYD

Vertical


80 dBuV/m

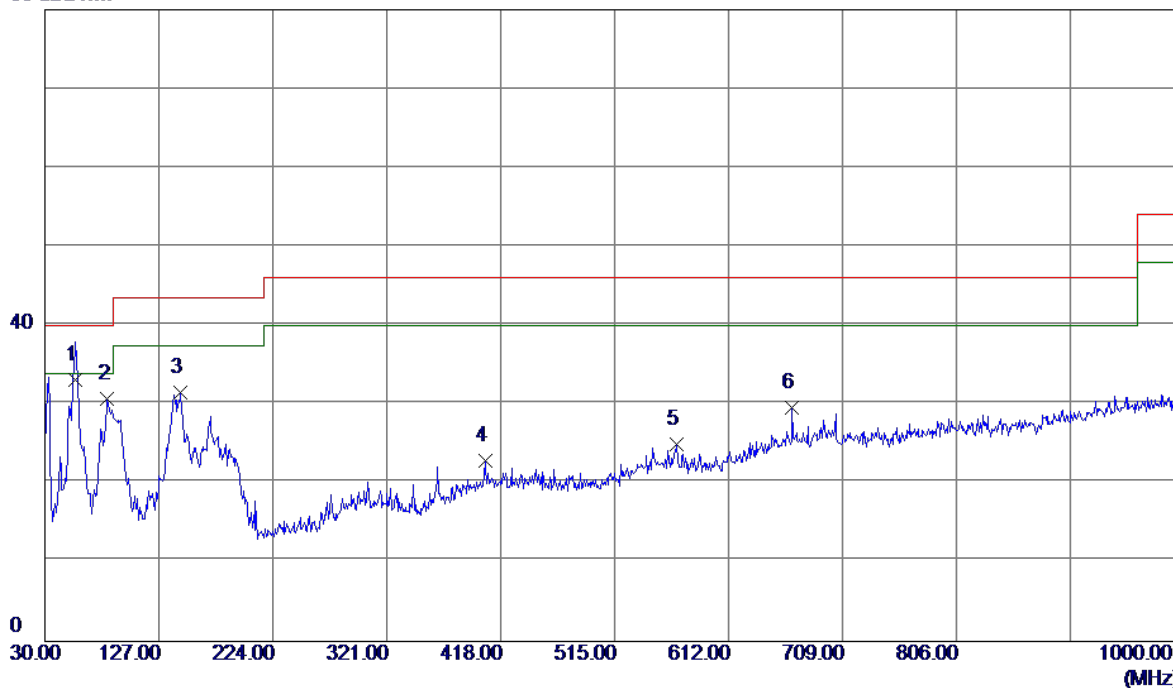

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.1900	45.78	-12.60	33.18	40.00	-6.82	QP	
2	83.3500	47.17	-16.41	30.76	40.00	-9.24	Peak	
3	145.4299	43.35	-11.90	31.45	43.50	-12.05	Peak	
4	404.9050	30.03	-7.19	22.84	46.00	-23.16	Peak	
5	567.3800	29.51	-4.58	24.93	46.00	-21.07	Peak	
6	666.3200	31.00	-1.35	29.65	46.00	-16.35	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_ Adapter: BYD


Horizontal

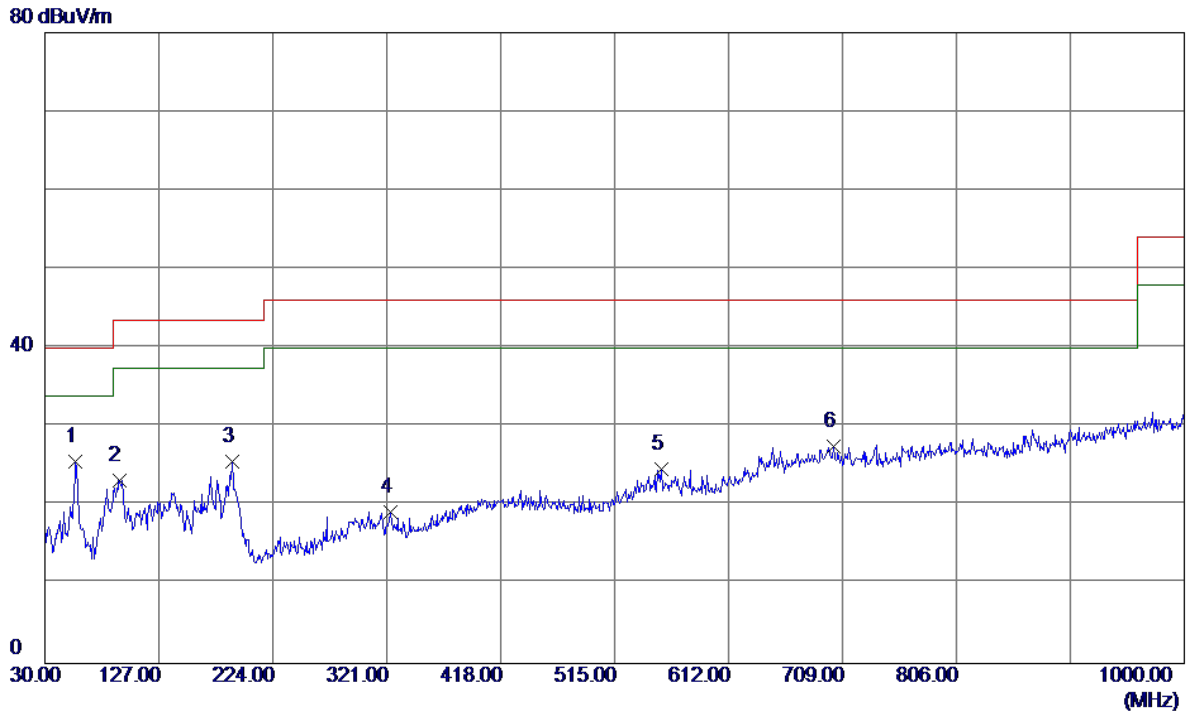

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.1900	38.26	-12.60	25.66	40.00	-14.34	Peak	
2	93.0500	39.56	-16.32	23.24	43.50	-20.26	Peak	
3	189.0800	38.68	-13.10	25.58	43.50	-17.92	Peak	
4	323.9100	29.60	-10.34	19.26	46.00	-26.74	Peak	
5	554.7700	29.09	-4.48	24.61	46.00	-21.39	Peak	
6	701.7250	28.23	-0.66	27.57	46.00	-18.43	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz _ Adapter: BYD


Vertical

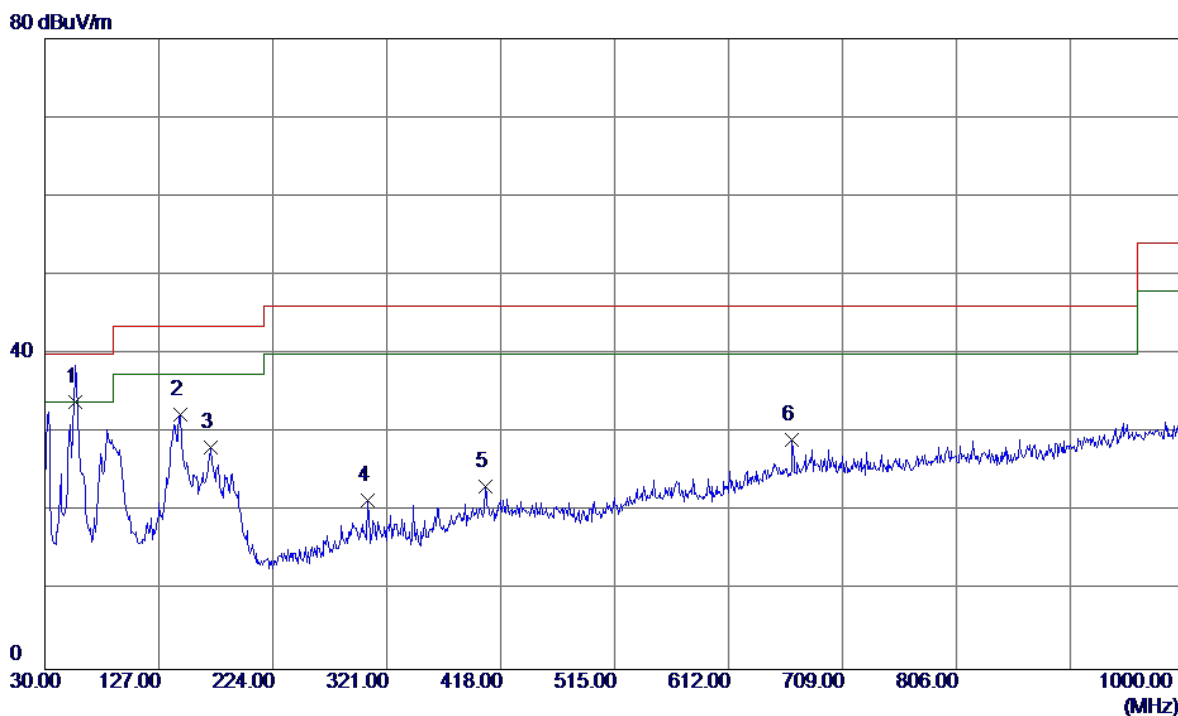

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.1900	46.51	-12.60	33.91	40.00	-6.09	QP	
2	145.4299	44.15	-11.90	32.25	43.50	-11.25	Peak	
3	171.6200	39.12	-10.94	28.18	43.50	-15.32	Peak	
4	304.9950	31.41	-10.02	21.39	46.00	-24.61	Peak	
5	404.9050	30.42	-7.19	23.23	46.00	-22.77	Peak	
6	666.3200	30.40	-1.35	29.05	46.00	-16.95	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_ Adapter: BYD


Horizontal

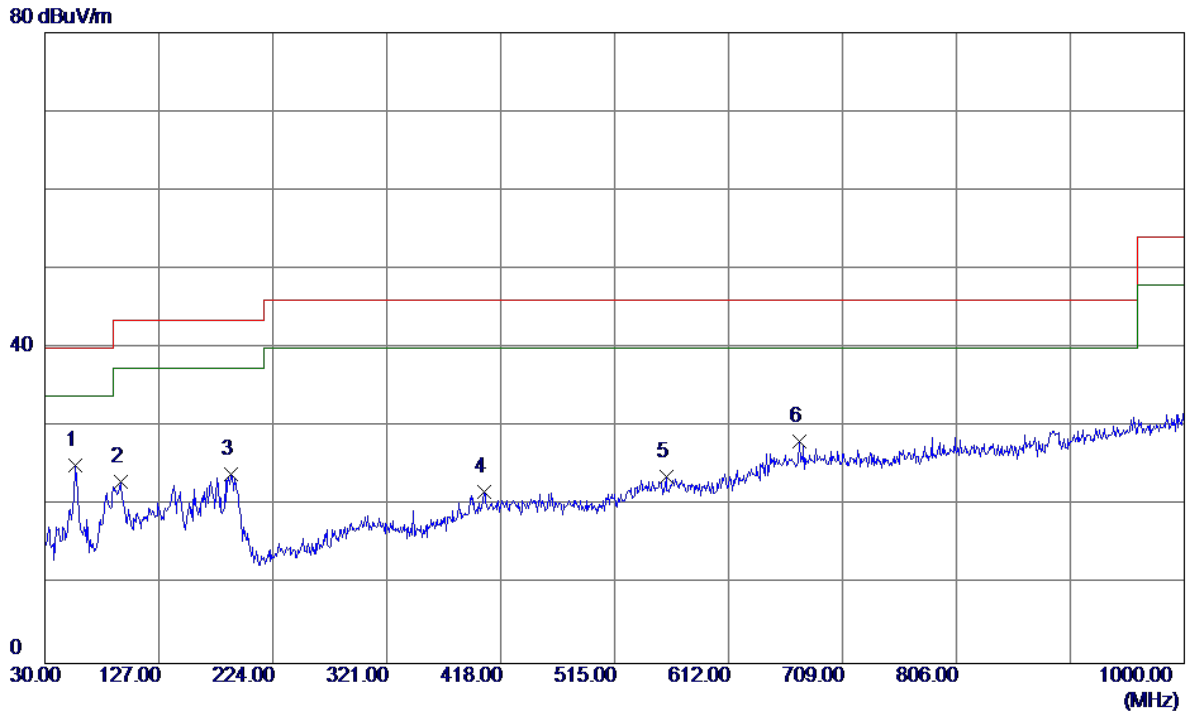

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	55.7050	37.66	-12.54	25.12	40.00	-14.88	Peak	
2	94.5050	39.39	-16.28	23.11	43.50	-20.39	Peak	
3	188.1100	37.05	-13.00	24.05	43.50	-19.45	Peak	
4	403.9350	28.94	-7.19	21.75	46.00	-24.25	Peak	
5	559.1350	28.19	-4.51	23.68	46.00	-22.32	Peak	
6	672.1400	29.42	-1.23	28.19	46.00	-17.81	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz _ Adapter: BYD


Vertical

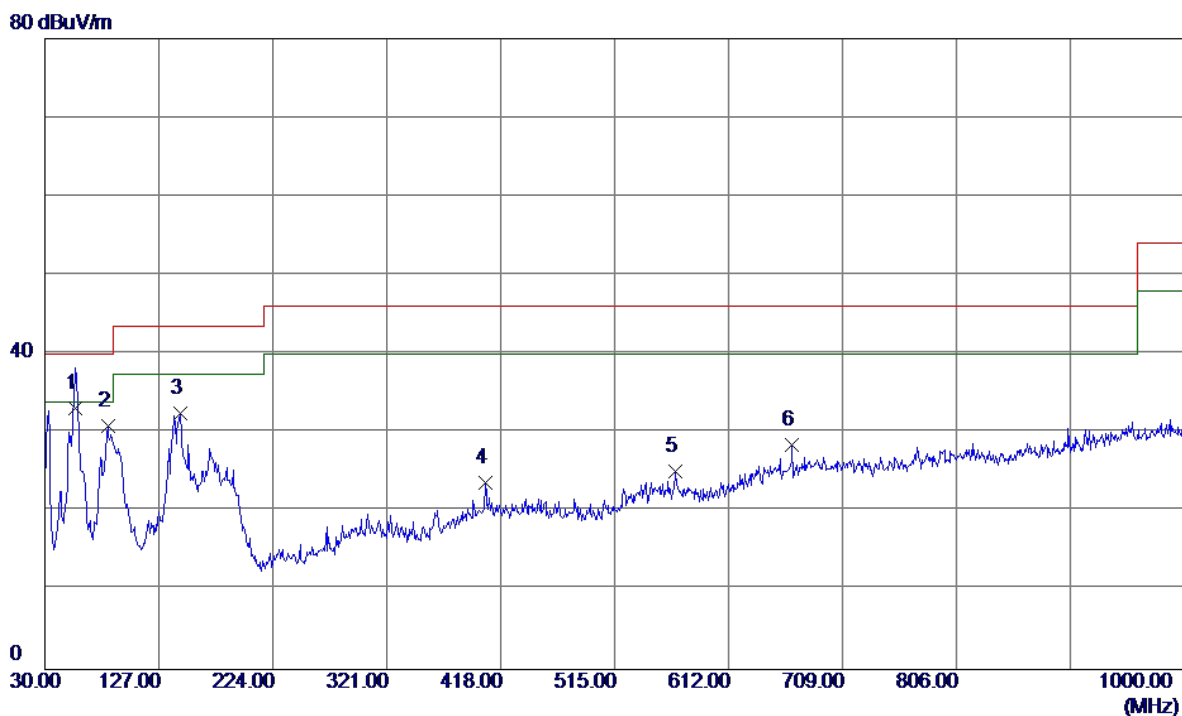

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.1900	45.70	-12.60	33.10	40.00	-6.90	QP	
2	83.8350	47.27	-16.36	30.91	40.00	-9.09	Peak	
3	144.9450	44.41	-11.90	32.51	43.50	-10.99	Peak	
4	404.9050	30.80	-7.19	23.61	46.00	-22.39	Peak	
5	566.8950	29.72	-4.57	25.15	46.00	-20.85	Peak	
6	666.3200	29.80	-1.35	28.45	46.00	-17.55	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz _ Adapter: BYD

Horizontal

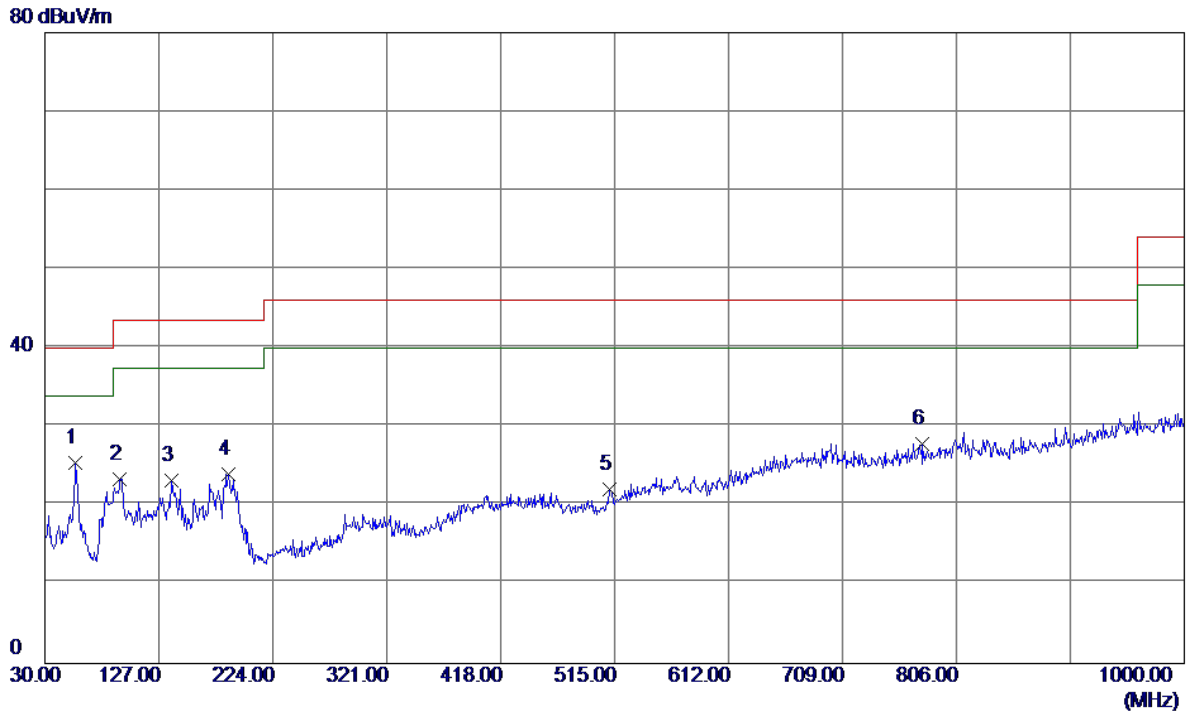


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.1900	38.00	-12.60	25.40	40.00	-14.60	Peak	
2	94.0199	39.60	-16.29	23.31	43.50	-20.19	Peak	
3	137.6700	34.98	-11.71	23.27	43.50	-20.23	Peak	
4	186.6550	36.85	-12.85	24.00	43.50	-19.50	Peak	
5	511.1200	29.00	-6.94	22.06	46.00	-23.94	Peak	
6	776.4150	27.99	-0.09	27.90	46.00	-18.10	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_ Adapter: BYD

Vertical


80 dBuV/m

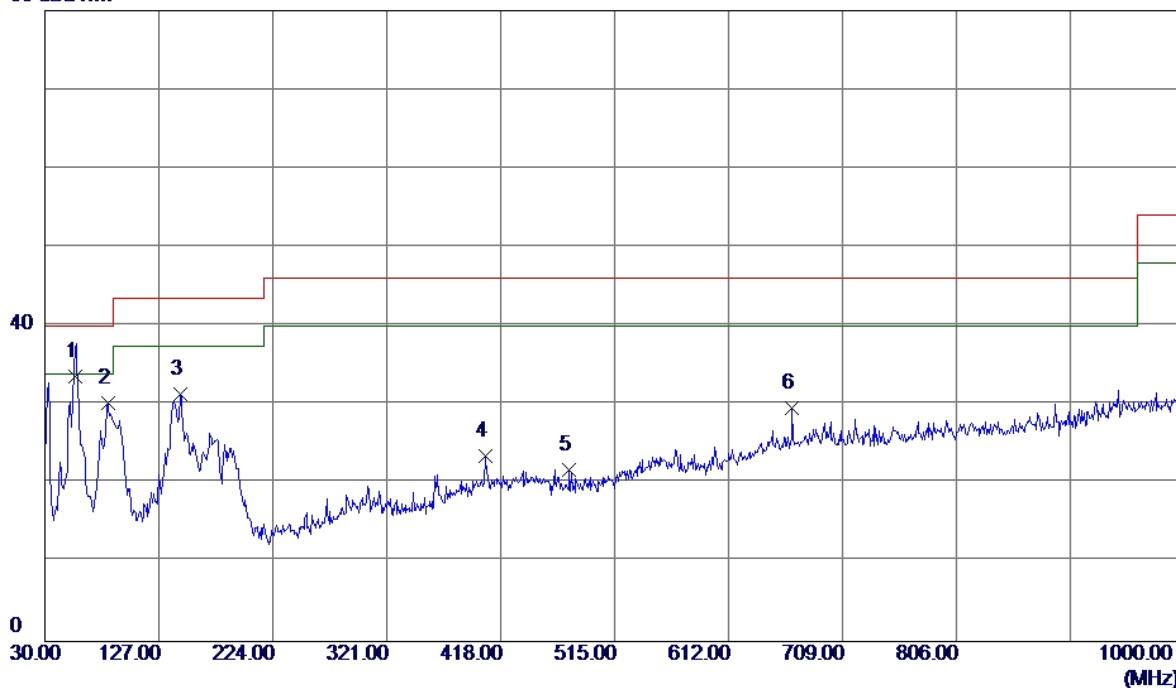

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.0275	46.21	-12.59	33.62	40.00	-6.38	QP	
2	83.8350	46.65	-16.36	30.29	40.00	-9.71	Peak	
3	144.9450	43.33	-11.90	31.43	43.50	-12.07	Peak	
4	404.9050	30.69	-7.19	23.50	46.00	-22.50	Peak	
5	476.6850	29.19	-7.38	21.81	46.00	-24.19	Peak	
6	666.3200	30.97	-1.35	29.62	46.00	-16.38	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_ Adapter: BYD

Horizontal

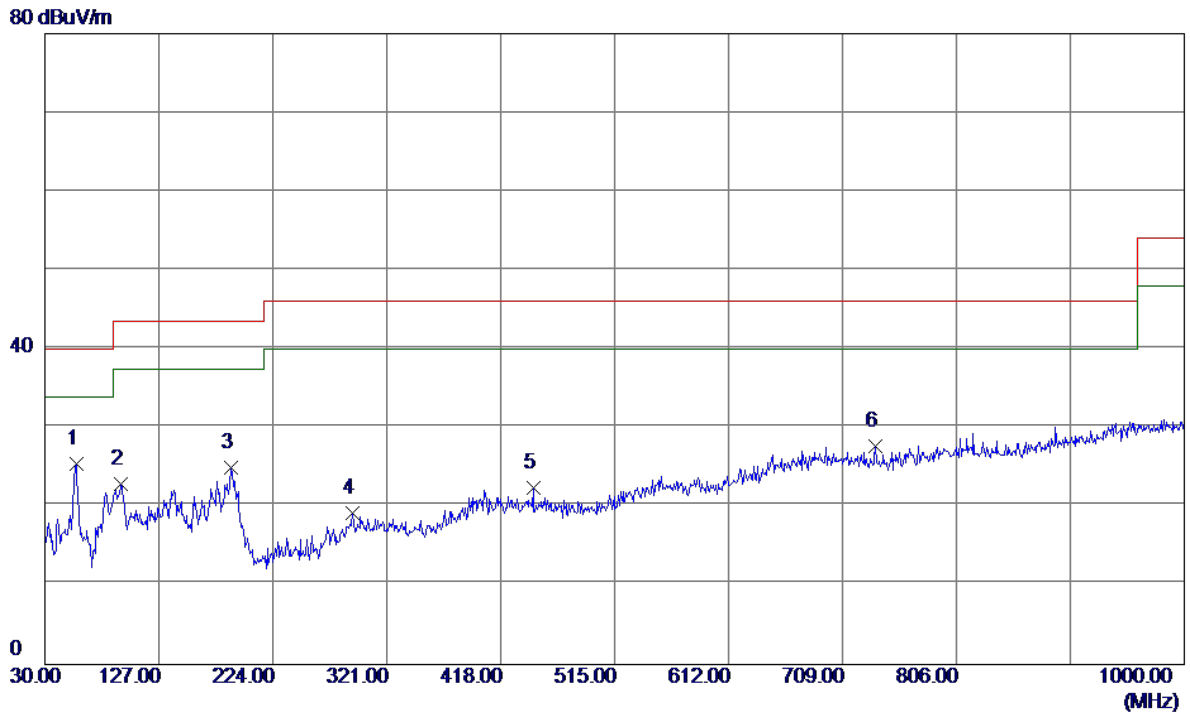


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.6750	37.99	-12.62	25.37	40.00	-14.63	Peak	
2	94.5050	39.13	-16.28	22.85	43.50	-20.65	Peak	
3	188.5950	38.08	-13.05	25.03	43.50	-18.47	Peak	
4	291.9000	29.14	-9.97	19.17	46.00	-26.83	Peak	
5	445.6450	29.43	-7.09	22.34	46.00	-23.66	Peak	
6	737.1300	28.45	-0.81	27.64	46.00	-18.36	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz _ Adapter: BYD

Vertical


80 dBuV/m

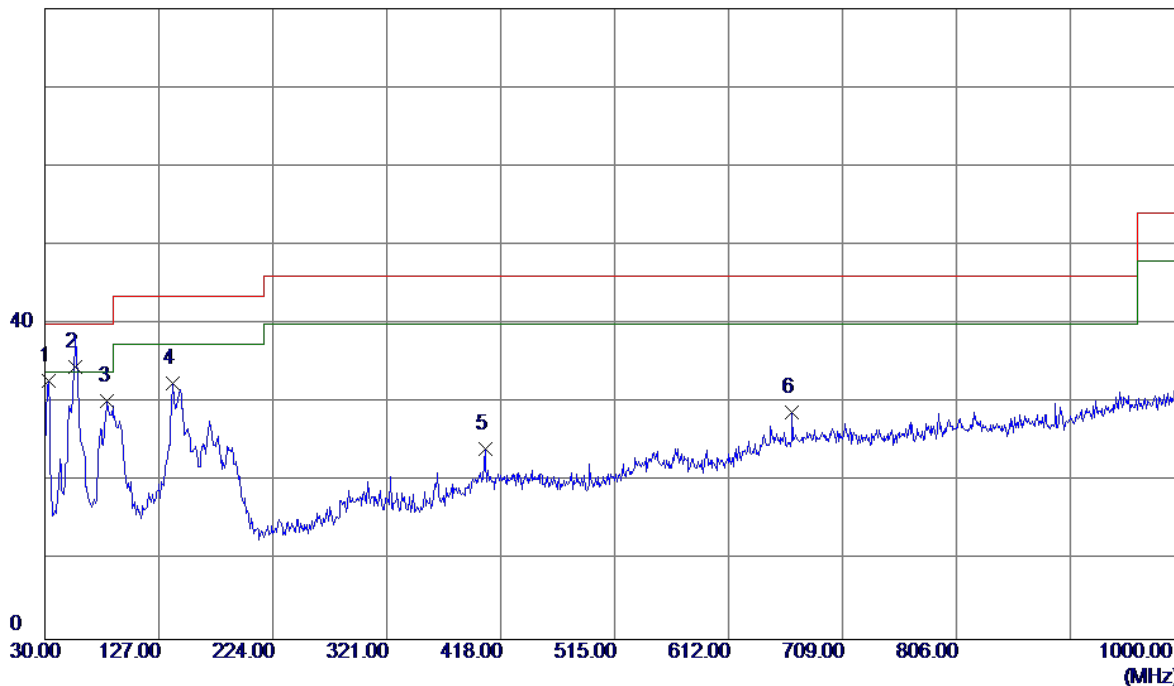

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	32.9100	46.18	-13.36	32.82	40.00	-7.18	Peak	
2 *	56.1900	47.11	-12.60	34.51	40.00	-5.49	QP	
3	83.3500	46.66	-16.41	30.25	40.00	-9.75	Peak	
4	138.6400	44.24	-11.78	32.46	43.50	-11.04	Peak	
5	404.9050	31.35	-7.19	24.16	46.00	-21.84	Peak	
6	666.3200	30.13	-1.35	28.78	46.00	-17.22	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz _ Adapter: BYD

Horizontal

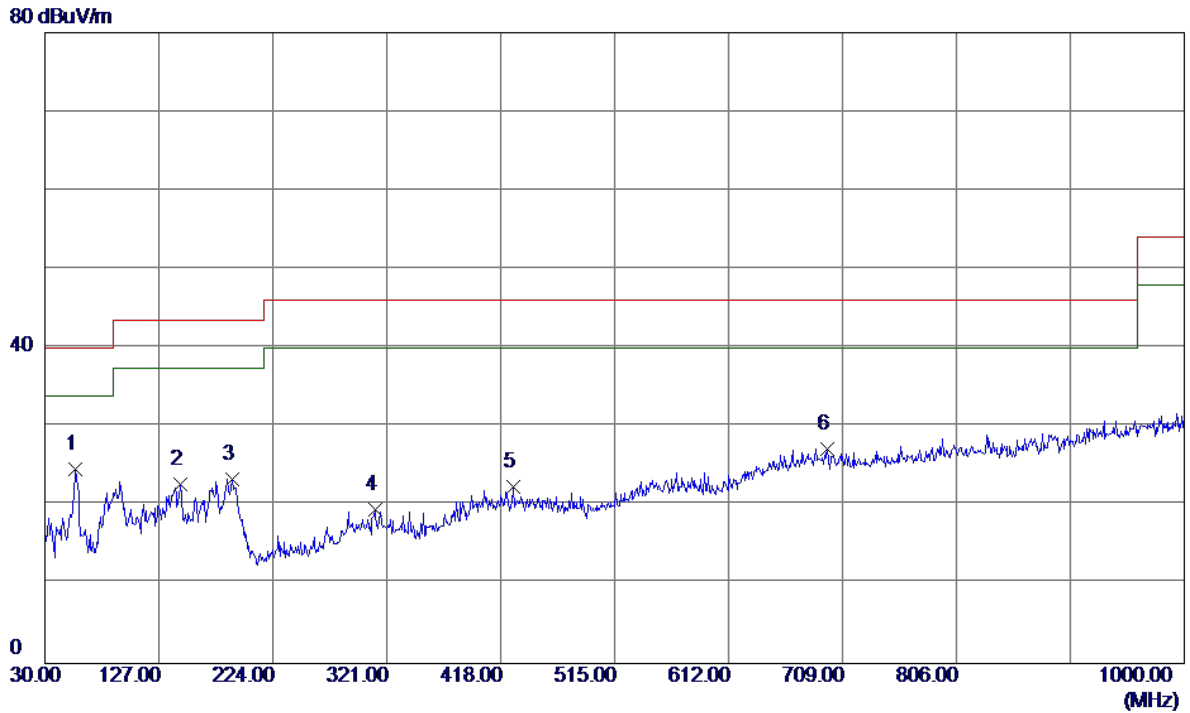


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.1900	37.21	-12.60	24.61	40.00	-15.39	Peak	
2	145.4299	34.59	-11.90	22.69	43.50	-20.81	Peak	
3	189.5650	36.56	-13.15	23.41	43.50	-20.09	Peak	
4	310.8150	29.58	-10.12	19.46	46.00	-26.54	Peak	
5	429.1550	29.46	-7.13	22.33	46.00	-23.67	Peak	
6	696.3900	27.88	-0.73	27.15	46.00	-18.85	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_ Adapter: BYD

Vertical

80 dBuV/m

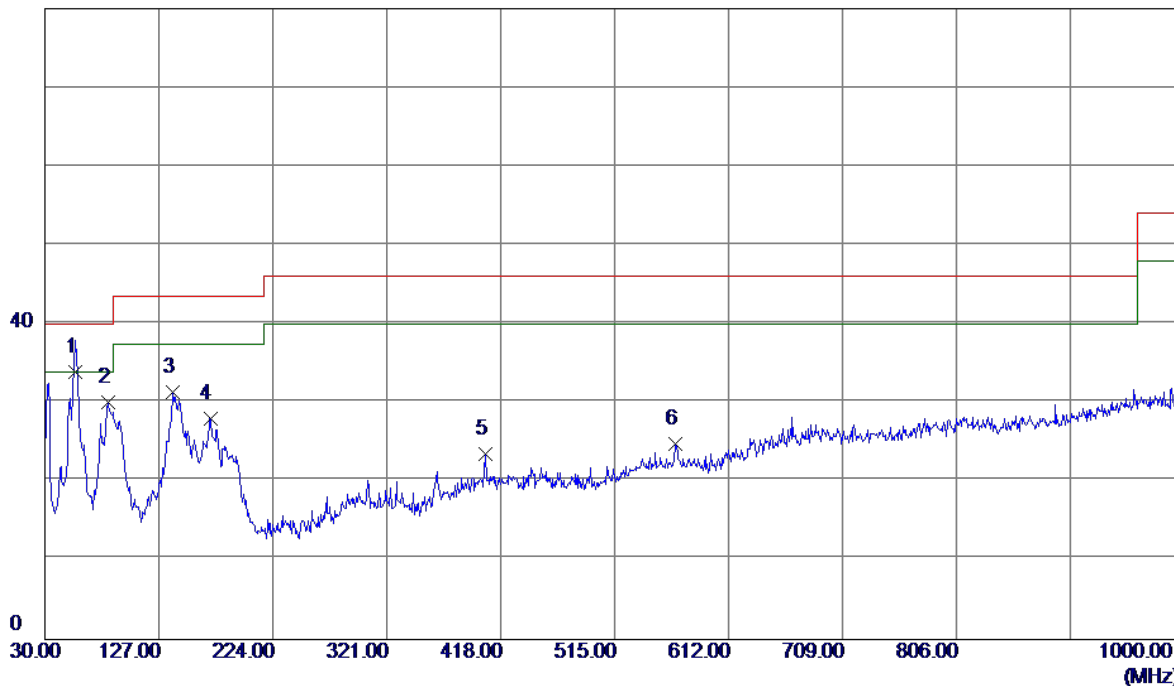


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.1900	46.57	-12.60	33.97	40.00	-6.03	QP	
2	83.8350	46.42	-16.36	30.06	40.00	-9.94	Peak	
3	139.1250	43.22	-11.81	31.41	43.50	-12.09	Peak	
4	170.6500	38.78	-10.80	27.98	43.50	-15.52	Peak	
5	405.3900	30.74	-7.19	23.55	46.00	-22.45	Peak	
6	566.8950	29.41	-4.57	24.84	46.00	-21.16	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_ Adapter: BYD

Horizontal


80 dBuV/m

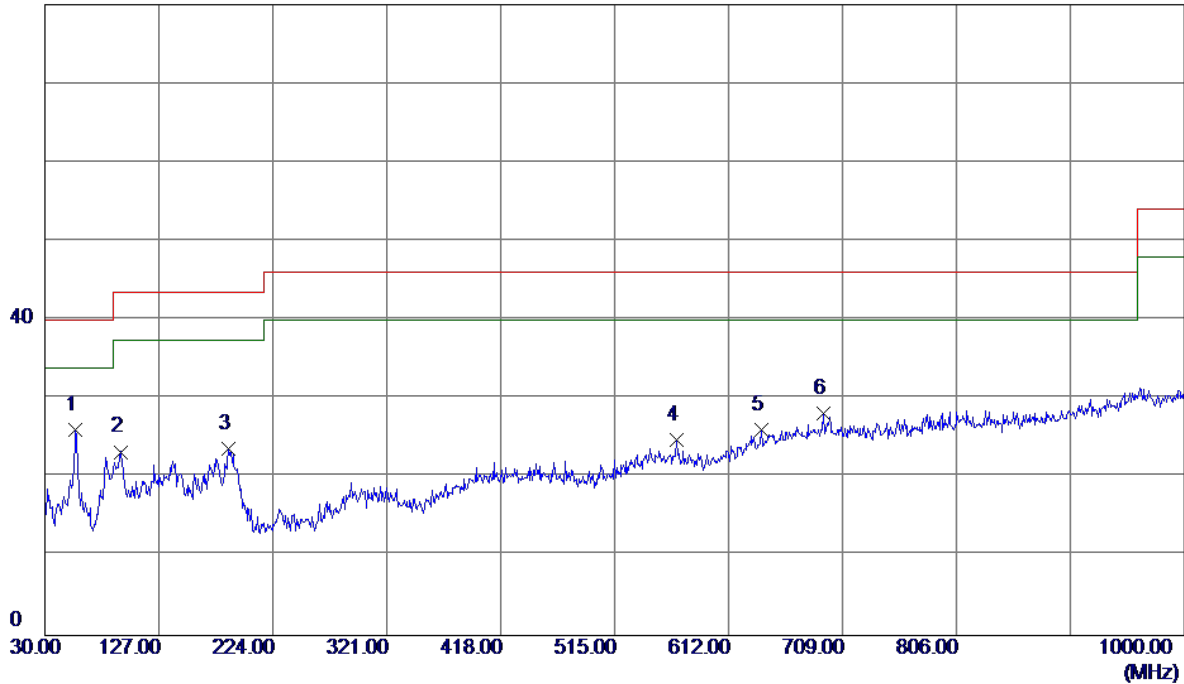

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.1900	38.62	-12.60	26.02	40.00	-13.98	Peak	
2	94.5050	39.56	-16.28	23.28	43.50	-20.22	Peak	
3	186.6550	36.46	-12.85	23.61	43.50	-19.89	Peak	
4	567.3800	29.40	-4.58	24.82	46.00	-21.18	Peak	
5	640.1300	28.33	-2.31	26.02	46.00	-19.98	Peak	
6	692.5100	29.01	-0.81	28.20	46.00	-17.80	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_ Adapter: BYD


Vertical

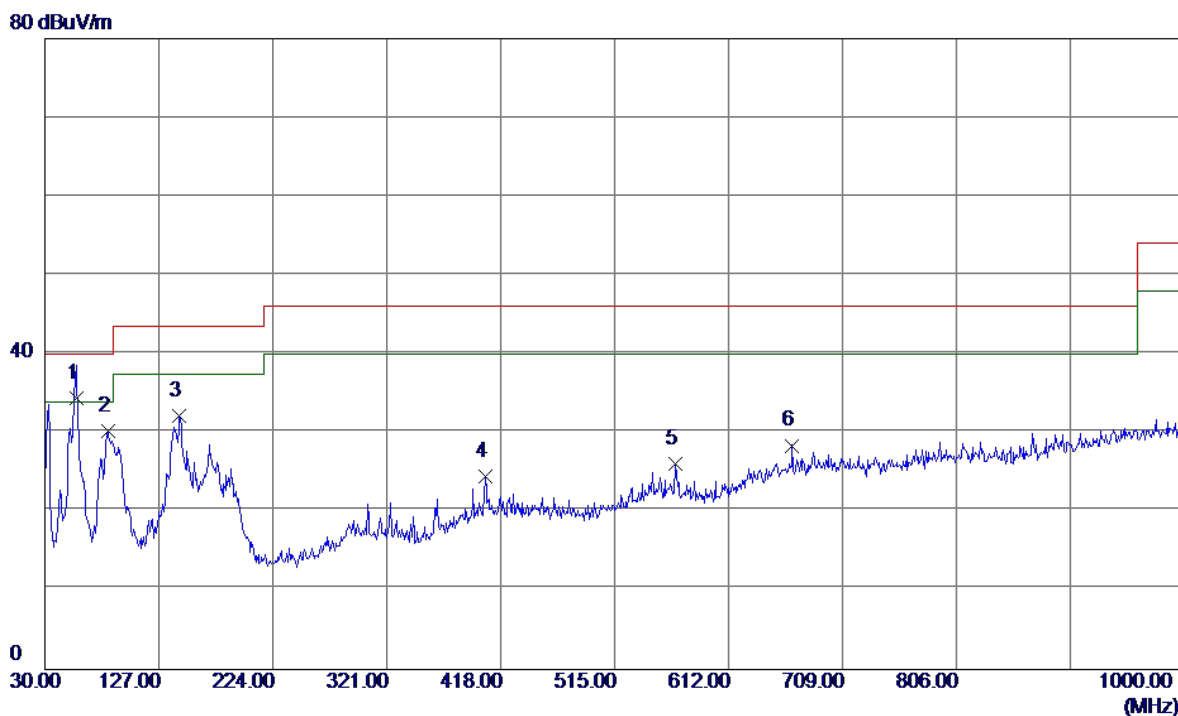

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.6750	46.95	-12.62	34.33	40.00	-5.67	QP	
2	83.8350	46.53	-16.36	30.17	40.00	-9.83	Peak	
3	144.4600	44.08	-11.89	32.19	43.50	-11.31	Peak	
4	404.9050	31.68	-7.19	24.49	46.00	-21.51	Peak	
5	566.8950	30.58	-4.57	26.01	46.00	-19.99	Peak	
6	666.3200	29.75	-1.35	28.40	46.00	-17.60	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_ Adapter: BYD


Horizontal

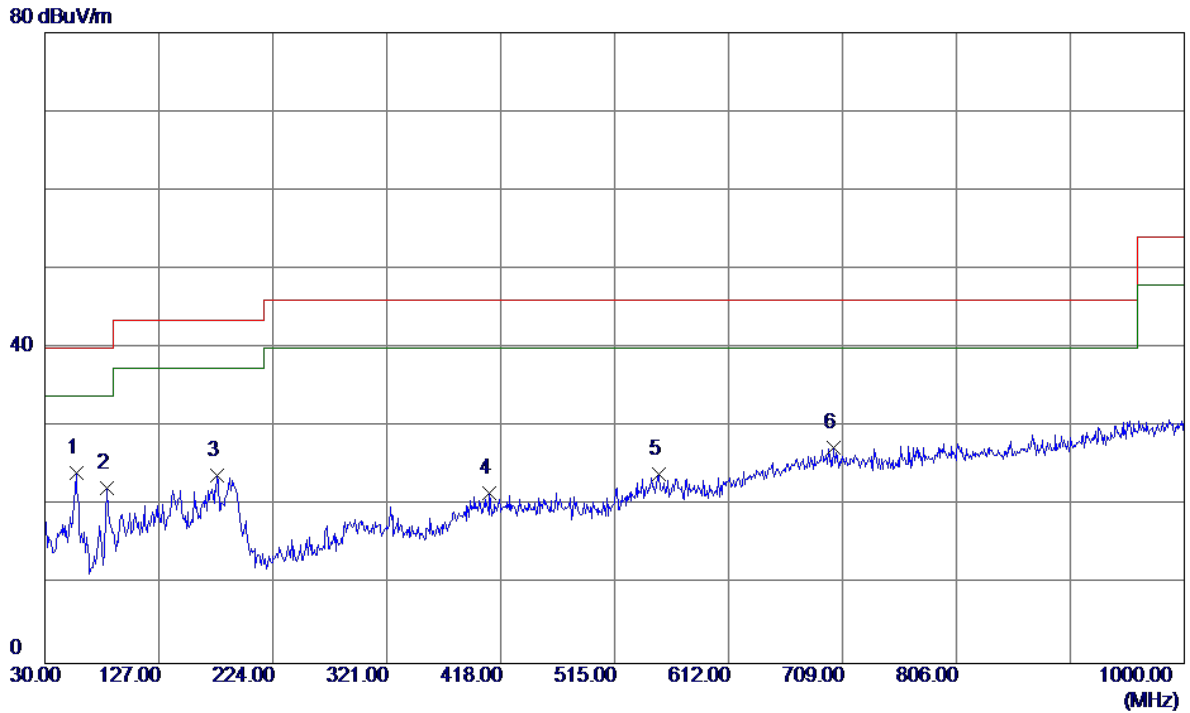

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.6750	36.75	-12.62	24.13	40.00	-15.87	Peak	
2	82.8650	38.68	-16.46	22.22	40.00	-17.78	Peak	
3	176.9550	35.52	-11.71	23.81	43.50	-19.69	Peak	
4	408.3000	28.80	-7.18	21.62	46.00	-24.38	Peak	
5	552.8300	28.43	-4.46	23.97	46.00	-22.03	Peak	
6	701.7250	28.05	-0.66	27.39	46.00	-18.61	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz _ Adapter: BYD

Vertical

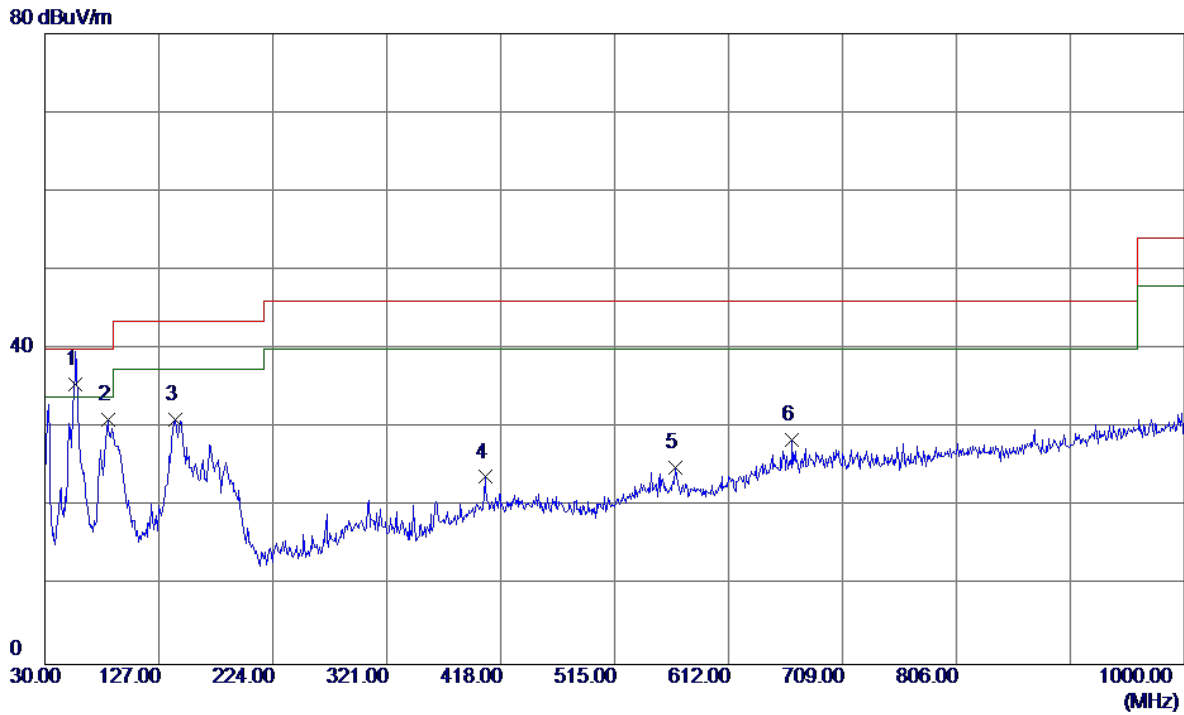


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.1900	48.09	-12.60	35.49	40.00	-4.51	QP	
2	83.8350	47.34	-16.36	30.98	40.00	-9.02	Peak	
3	140.5800	42.96	-11.88	31.08	43.50	-12.42	Peak	
4	404.9050	30.95	-7.19	23.76	46.00	-22.24	Peak	
5	566.8950	29.48	-4.57	24.91	46.00	-21.09	Peak	
6	666.3200	29.79	-1.35	28.44	46.00	-17.56	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz _ Adapter: BYD

Horizontal


80 dBuV/m

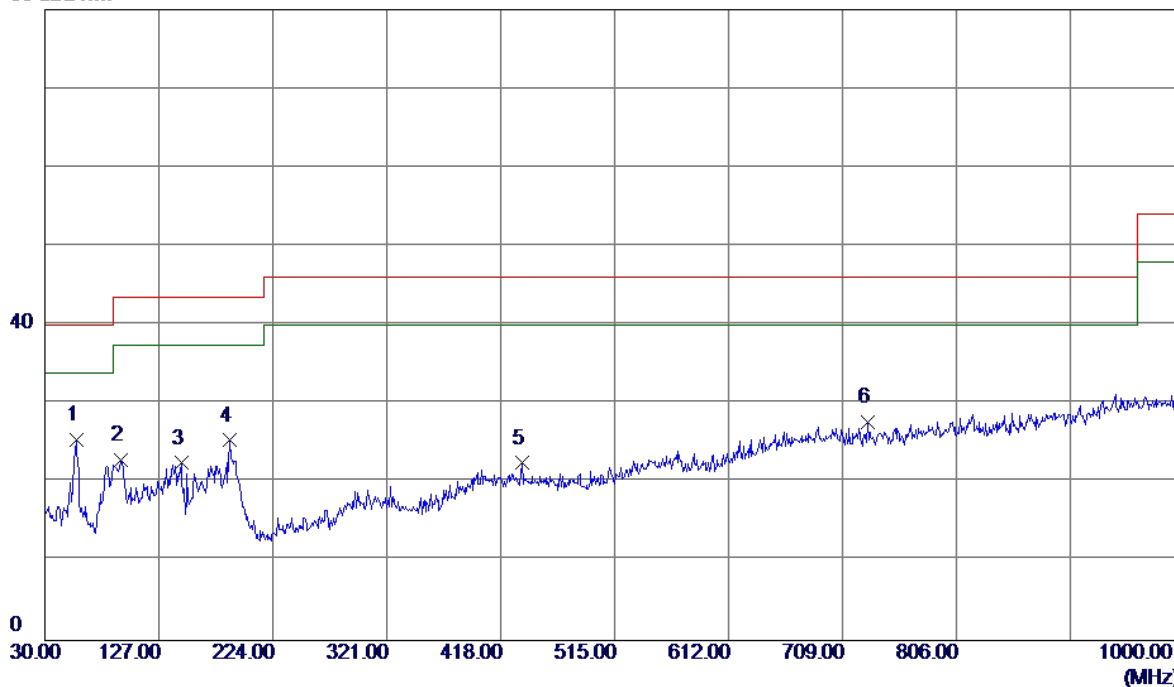

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	56.6750	38.05	-12.62	25.43	40.00	-14.57	Peak	
2	94.9900	39.09	-16.27	22.82	43.50	-20.68	Peak	
3	145.9149	34.38	-11.90	22.48	43.50	-21.02	Peak	
4	187.6250	38.31	-12.95	25.36	43.50	-18.14	Peak	
5	435.9450	29.59	-7.11	22.48	46.00	-23.52	Peak	
6	730.3400	28.52	-0.78	27.74	46.00	-18.26	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz _ Adapter: HUNTKEY


Vertical

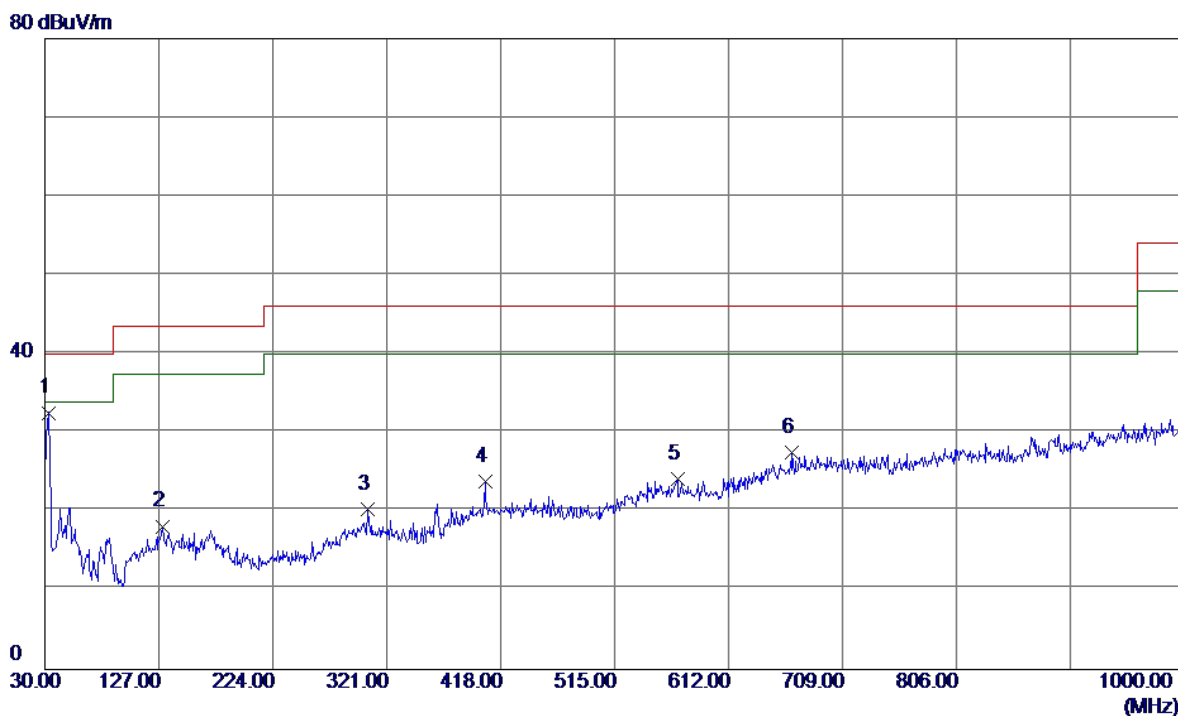

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	32.9100	45.92	-13.36	32.56	40.00	-7.44	Peak	
2	130.3950	29.33	-11.17	18.16	43.50	-25.34	Peak	
3	304.9950	30.30	-10.02	20.28	46.00	-25.72	Peak	
4	404.9050	31.01	-7.19	23.82	46.00	-22.18	Peak	
5	568.8350	28.74	-4.59	24.15	46.00	-21.85	Peak	
6	666.3200	28.92	-1.35	27.57	46.00	-18.43	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz _ Adapter: HUNTKEY


Horizontal

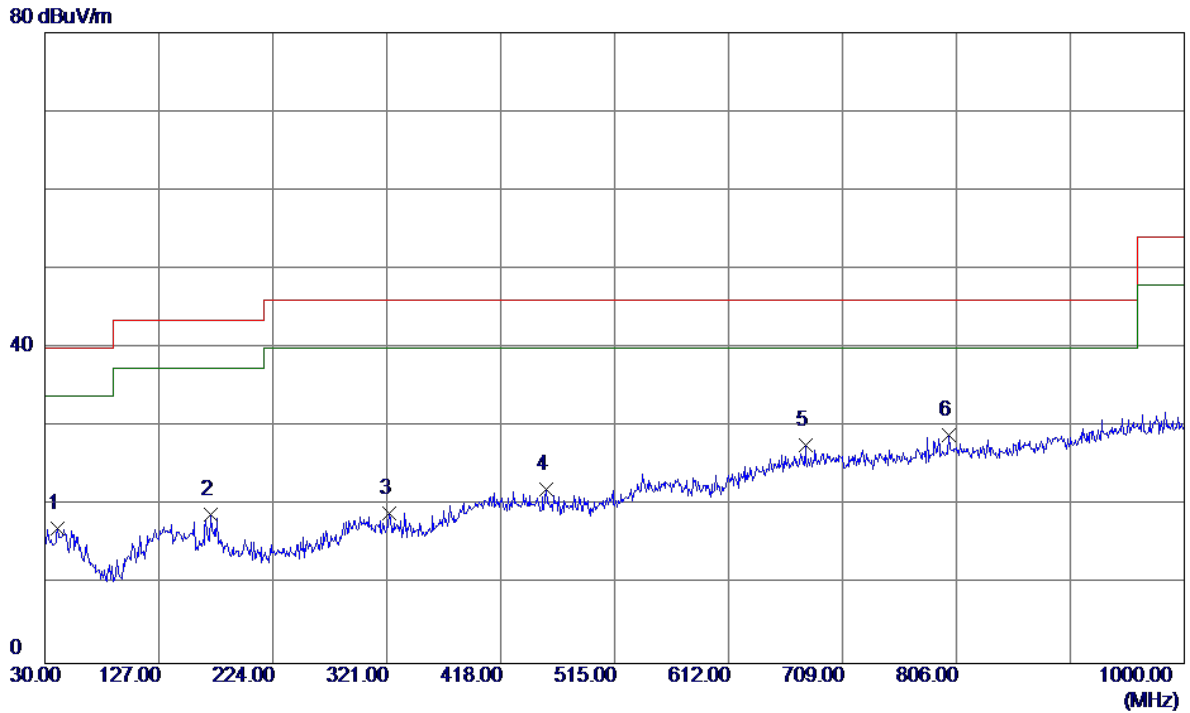

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	40.6699	29.52	-12.38	17.14	40.00	-22.86	Peak	
2	171.6200	29.89	-10.94	18.95	43.50	-24.55	Peak	
3	322.9400	29.31	-10.32	18.99	46.00	-27.01	Peak	
4	456.8000	29.24	-7.15	22.09	46.00	-23.91	Peak	
5	677.4750	28.73	-1.12	27.61	46.00	-18.39	Peak	
6 *	799.2100	28.37	0.59	28.96	46.00	-17.04	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz _ Adapter: HUNTKEY


Vertical

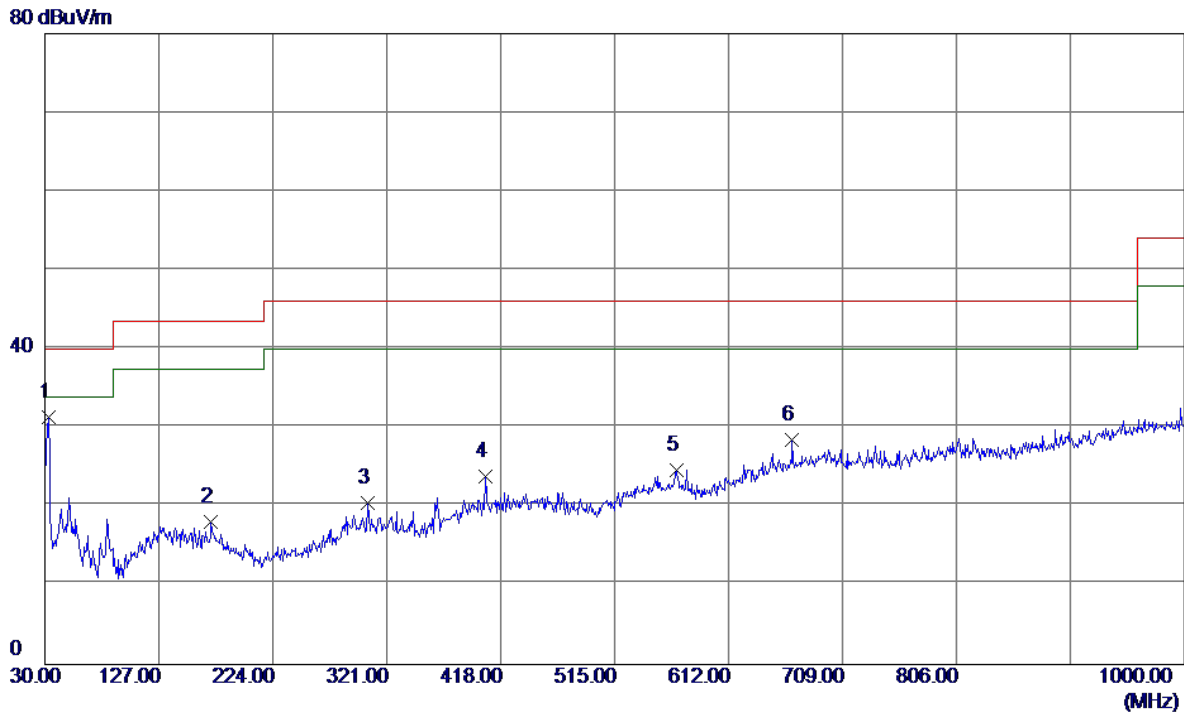

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	32.9100	44.78	-13.36	31.42	40.00	-8.58	Peak	
2	171.6200	29.05	-10.94	18.11	43.50	-25.39	Peak	
3	304.9950	30.43	-10.02	20.41	46.00	-25.59	Peak	
4	404.9050	30.97	-7.19	23.78	46.00	-22.22	Peak	
5	567.3800	29.17	-4.58	24.59	46.00	-21.41	Peak	
6	666.3200	29.87	-1.35	28.52	46.00	-17.48	Peak	


Test Mode: UNII-1/TX A Mode 5240MHz _ Adapter: HUNTKEY

Horizontal

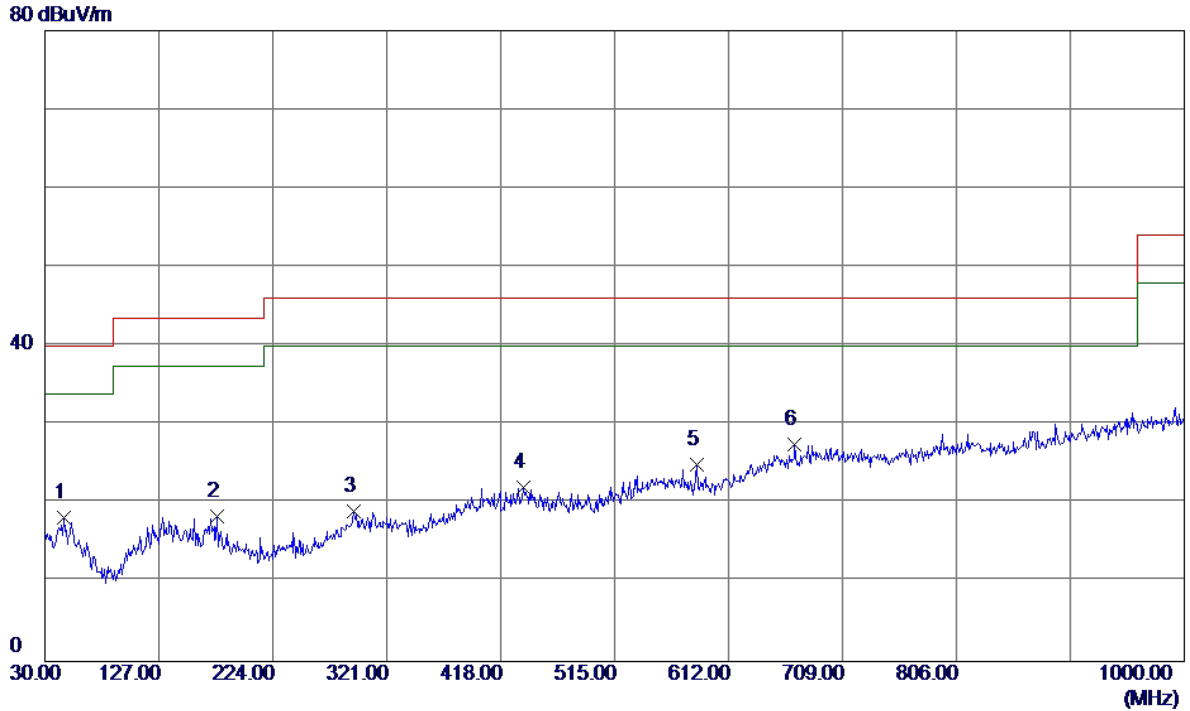


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	46.0050	30.27	-12.07	18.20	40.00	-21.80	Peak	
2	176.9550	30.07	-11.71	18.36	43.50	-25.14	Peak	
3	293.3550	29.02	-9.97	19.05	46.00	-26.95	Peak	
4	437.8850	29.19	-7.11	22.08	46.00	-23.92	Peak	
5	585.3250	29.67	-4.72	24.95	46.00	-21.05	Peak	
6 *	668.2600	28.78	-1.31	27.47	46.00	-18.53	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz _ Adapter: HUNTKEY

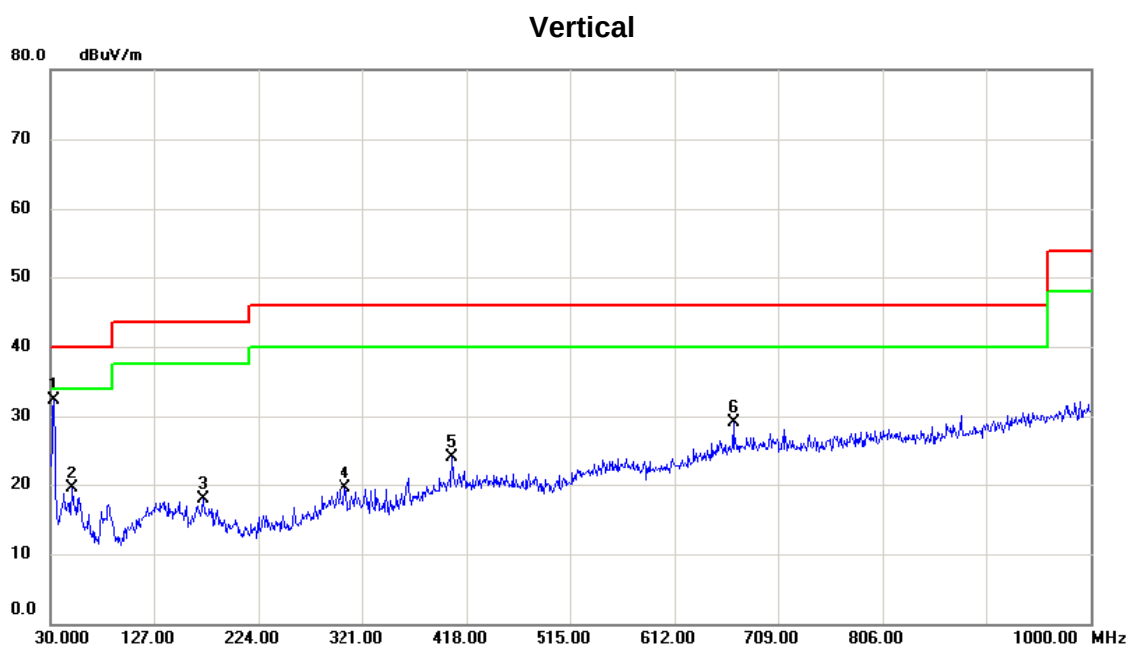

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.910	45.71	-13.36	32.35	40.00	-7.65	peak	
2		49.885	31.59	-12.05	19.54	40.00	-20.46	peak	
3		172.590	29.02	-11.08	17.94	43.50	-25.56	peak	
4		304.995	29.57	-10.02	19.55	46.00	-26.45	peak	
5		404.905	31.23	-7.19	24.04	46.00	-21.96	peak	
6		666.320	30.48	-1.35	29.13	46.00	-16.87	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_ Adapter: HUNTKEY

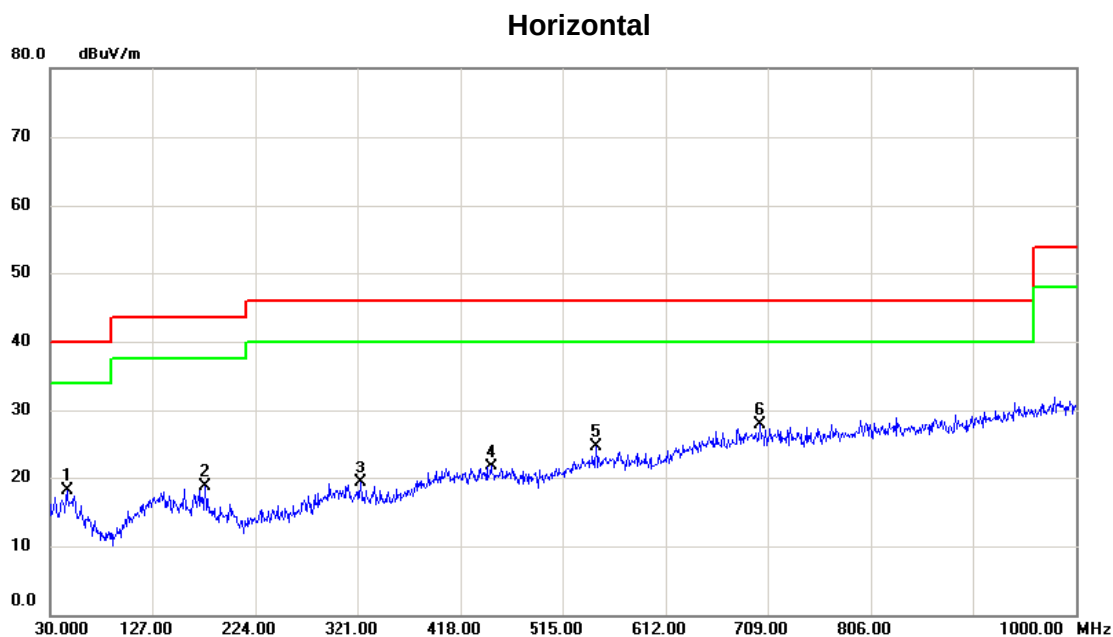


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		45.520	30.04	-11.97	18.07	40.00	-21.93	peak	
2		176.955	30.41	-11.71	18.70	43.50	-24.80	peak	
3		323.910	29.56	-10.34	19.22	46.00	-26.78	peak	
4		446.615	28.73	-7.08	21.65	46.00	-24.35	peak	
5		546.040	29.31	-4.70	24.61	46.00	-21.39	peak	
6	*	701.725	28.50	-0.66	27.84	46.00	-18.16	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_ Adapter: HUNTKEY

Vertical

80 dBuV/m

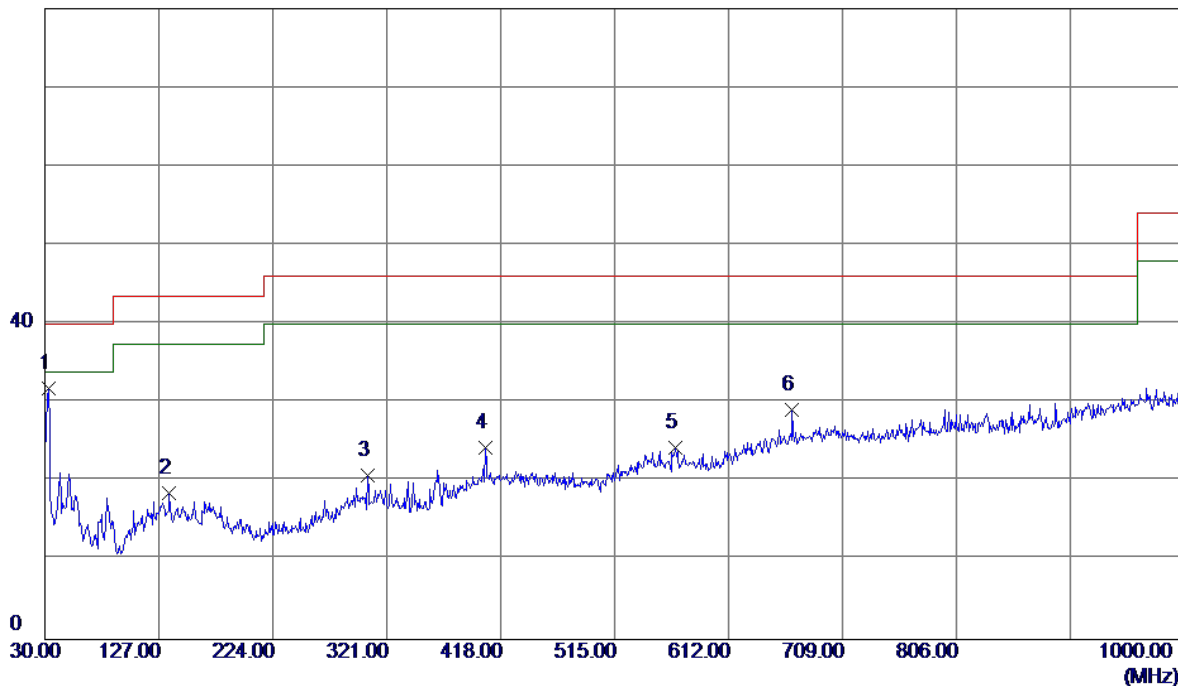


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	32.9100	45.16	-13.36	31.80	40.00	-8.20	Peak	
2	135.7300	30.08	-11.56	18.52	43.50	-24.98	Peak	
3	304.9950	30.90	-10.02	20.88	46.00	-25.12	Peak	
4	404.9050	31.50	-7.19	24.31	46.00	-21.69	Peak	
5	566.8950	28.91	-4.57	24.34	46.00	-21.66	Peak	
6	666.3200	30.41	-1.35	29.06	46.00	-16.94	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_ Adapter: HUNTKEY

Horizontal

80 dBuV/m

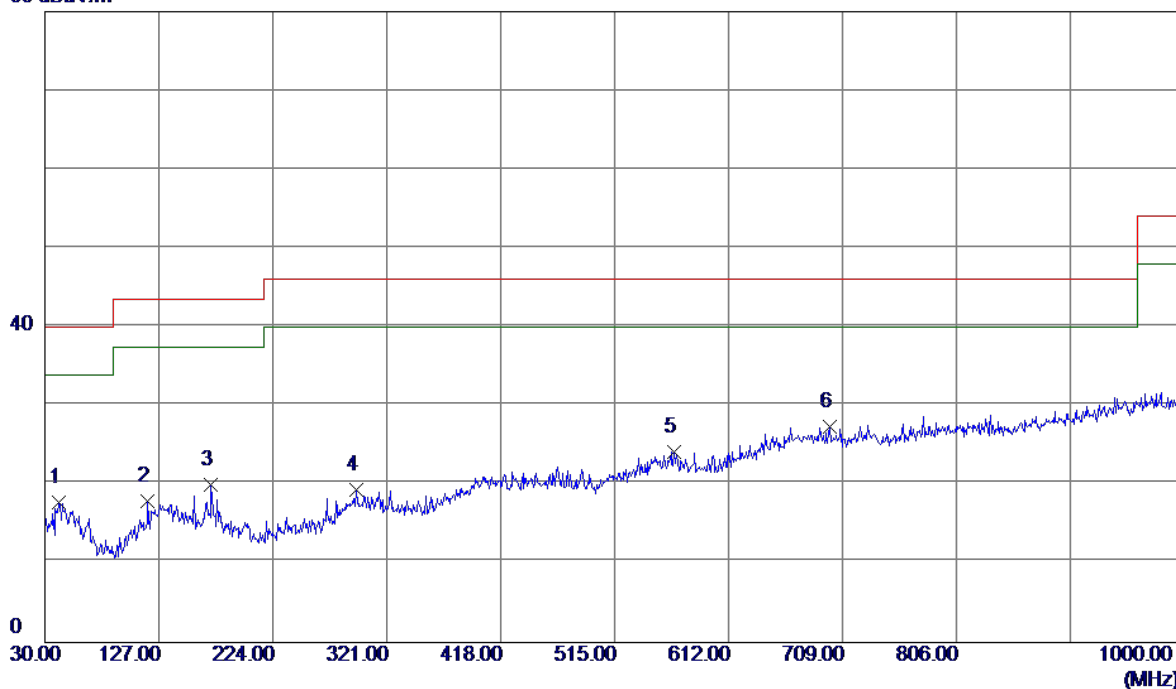


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	41.6400	29.95	-12.17	17.78	40.00	-22.22	Peak	
2	117.7850	30.87	-12.88	17.99	43.50	-25.51	Peak	
3	171.6200	30.92	-10.94	19.98	43.50	-23.52	Peak	
4	295.2950	29.36	-9.96	19.40	46.00	-26.60	Peak	
5	565.9250	28.66	-4.56	24.10	46.00	-21.90	Peak	
6 *	698.3300	28.05	-0.68	27.37	46.00	-18.63	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz _ Adapter: HUNTKEY

Vertical


80 dBuV/m

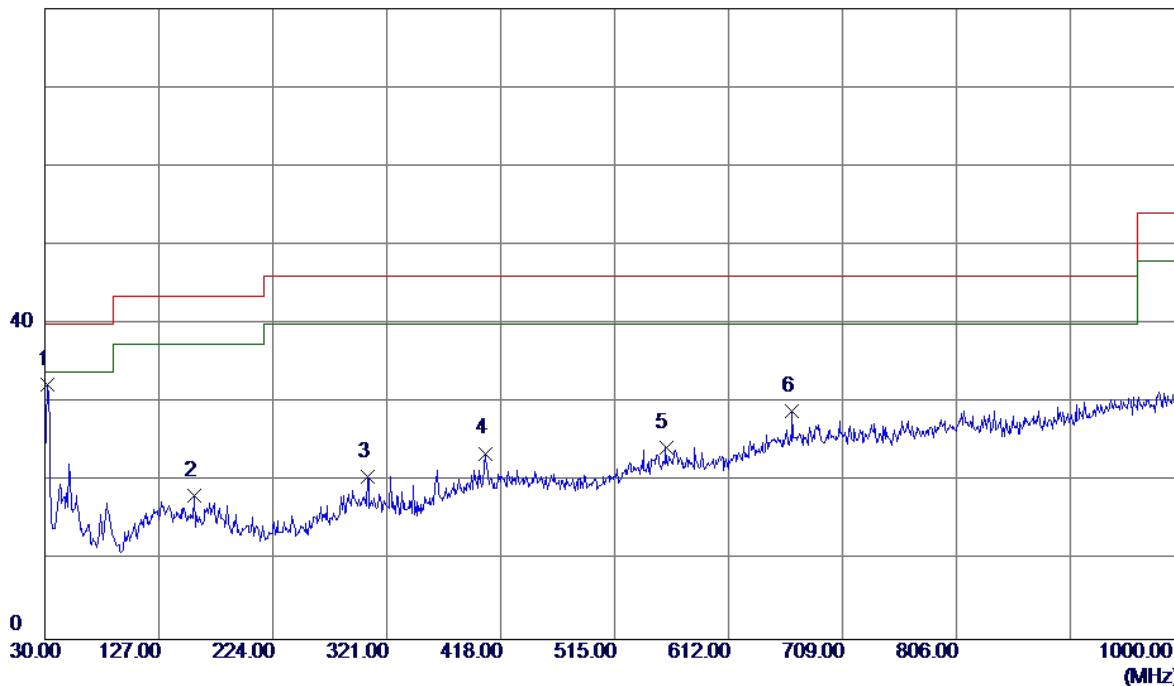

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	32.4250	45.61	-13.27	32.34	40.00	-7.66	Peak	
2	157.0700	30.67	-12.37	18.30	43.50	-25.20	Peak	
3	304.9950	30.72	-10.02	20.70	46.00	-25.30	Peak	
4	404.9050	30.79	-7.19	23.60	46.00	-22.40	Peak	
5	558.6500	28.82	-4.51	24.31	46.00	-21.69	Peak	
6	666.3200	30.24	-1.35	28.89	46.00	-17.11	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_ Adapter: HUNTKEY


Horizontal

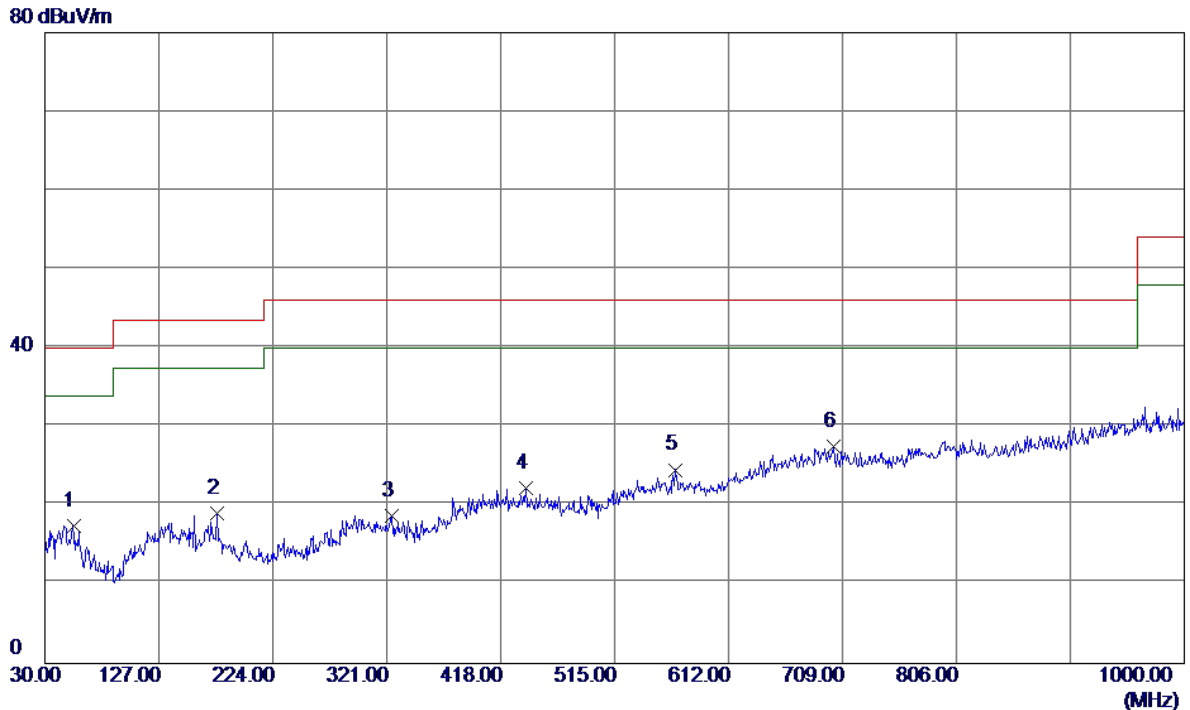

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	54.2500	29.73	-12.25	17.48	40.00	-22.52	Peak	
2	176.9550	30.69	-11.71	18.98	43.50	-24.52	Peak	
3	324.8800	29.05	-10.35	18.70	46.00	-27.30	Peak	
4	439.3400	29.33	-7.10	22.23	46.00	-23.77	Peak	
5	566.4099	29.13	-4.57	24.56	46.00	-21.44	Peak	
6 *	701.7250	28.20	-0.66	27.54	46.00	-18.46	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_ Adapter: HUNTKEY


Vertical

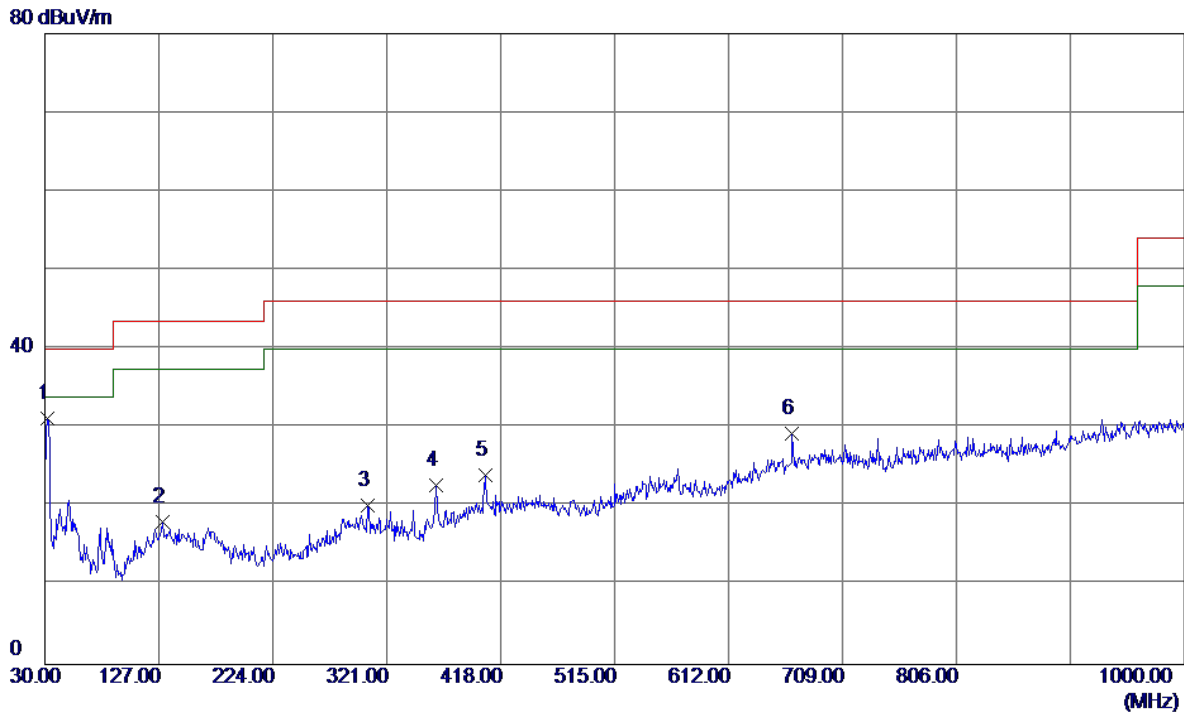

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	32.4250	44.40	-13.27	31.13	40.00	-8.87	Peak	
2	130.3950	29.25	-11.17	18.08	43.50	-25.42	Peak	
3	304.9950	30.13	-10.02	20.11	46.00	-25.89	Peak	
4	363.1950	32.54	-9.83	22.71	46.00	-23.29	Peak	
5	404.9050	31.14	-7.19	23.95	46.00	-22.05	Peak	
6	666.3200	30.63	-1.35	29.28	46.00	-16.72	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_ Adapter: HUNTKEY


Horizontal

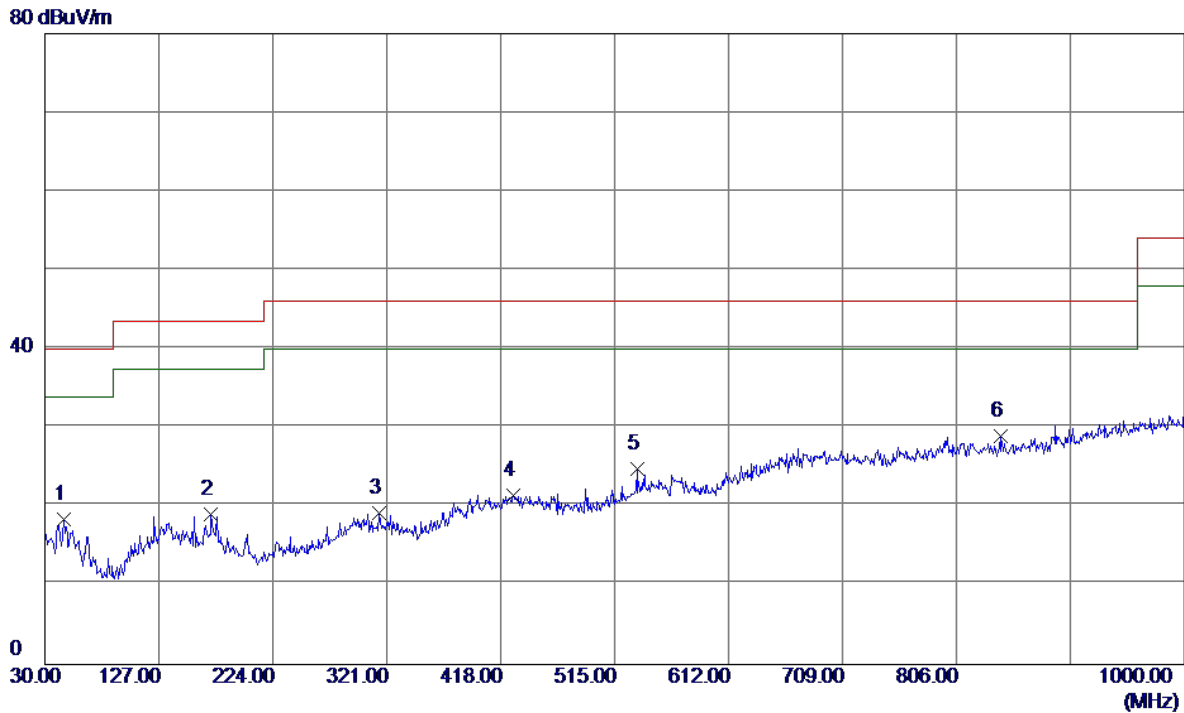

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	46.0050	30.48	-12.07	18.41	40.00	-21.59	Peak	
2	171.6200	29.95	-10.94	19.01	43.50	-24.49	Peak	
3	314.6950	29.45	-10.18	19.27	46.00	-26.73	Peak	
4	429.1550	28.59	-7.13	21.46	46.00	-24.54	Peak	
5	533.9150	30.29	-5.47	24.82	46.00	-21.18	Peak	
6 *	843.3450	28.34	0.60	28.94	46.00	-17.06	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_ Adapter: HUNTKEY


Vertical

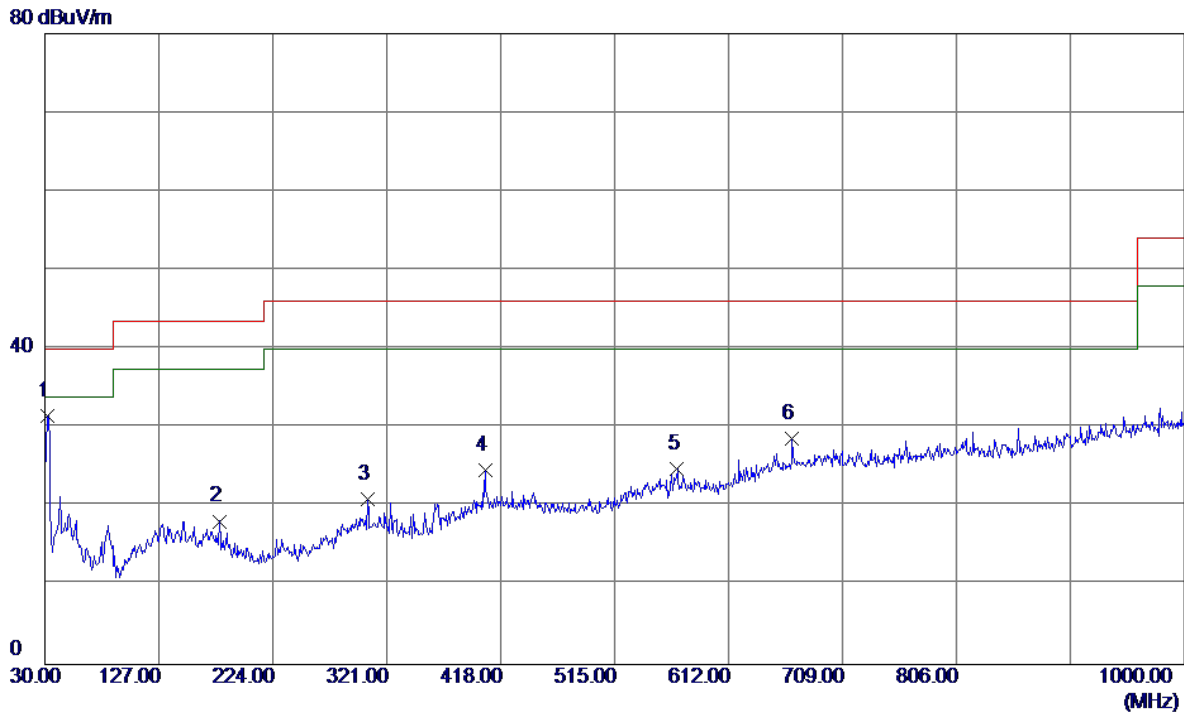

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	32.4250	44.81	-13.27	31.54	40.00	-8.46	Peak	
2	178.4100	30.08	-11.92	18.16	43.50	-25.34	Peak	
3	304.9950	30.92	-10.02	20.90	46.00	-25.10	Peak	
4	404.9050	31.86	-7.19	24.67	46.00	-21.33	Peak	
5	568.3500	29.45	-4.58	24.87	46.00	-21.13	Peak	
6	666.3200	30.06	-1.35	28.71	46.00	-17.29	Peak	


Test Mode: UNII-3/TX A Mode 5745MHz_ Adapter: HUNTKEY

Horizontal

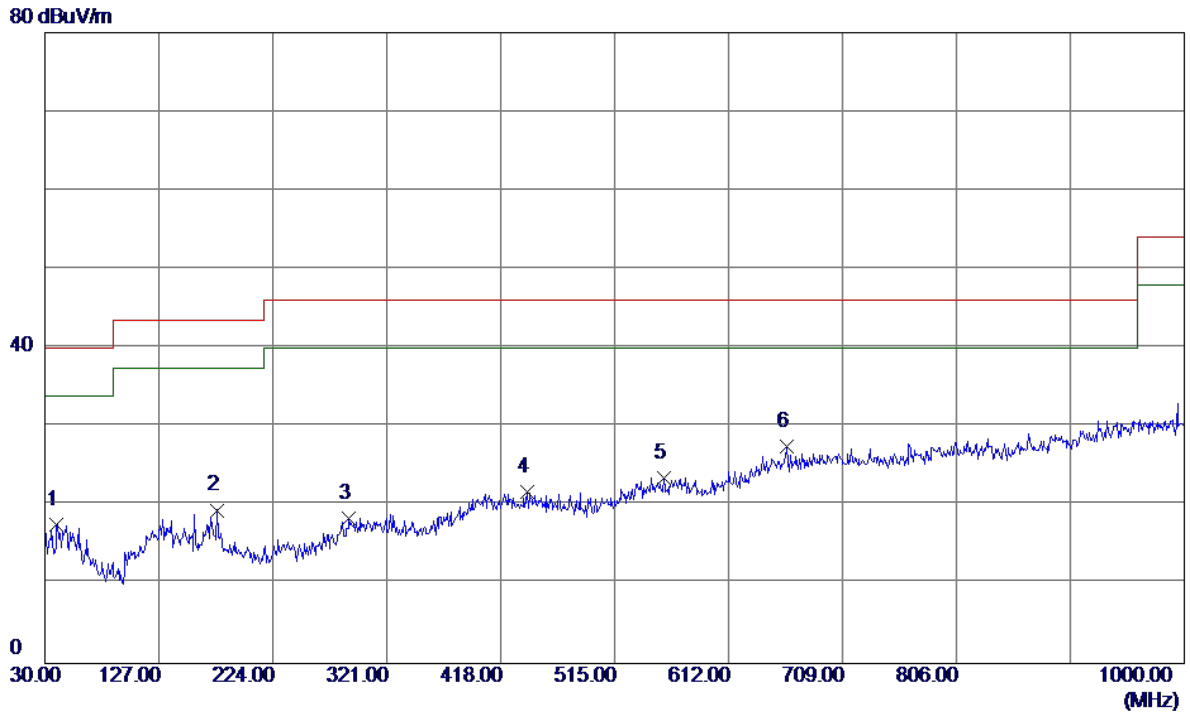

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	40.1850	30.12	-12.48	17.64	40.00	-22.36	Peak	
2	176.9550	31.15	-11.71	19.44	43.50	-24.06	Peak	
3	288.9900	28.59	-10.16	18.43	46.00	-27.57	Peak	
4	440.7950	28.79	-7.10	21.69	46.00	-24.31	Peak	
5	556.7100	27.98	-4.49	23.49	46.00	-22.51	Peak	
6 *	661.9550	28.94	-1.44	27.50	46.00	-18.50	Peak	


Test Mode: UNII-3/TX A Mode 5825MHz _ Adapter: HUNTKEY

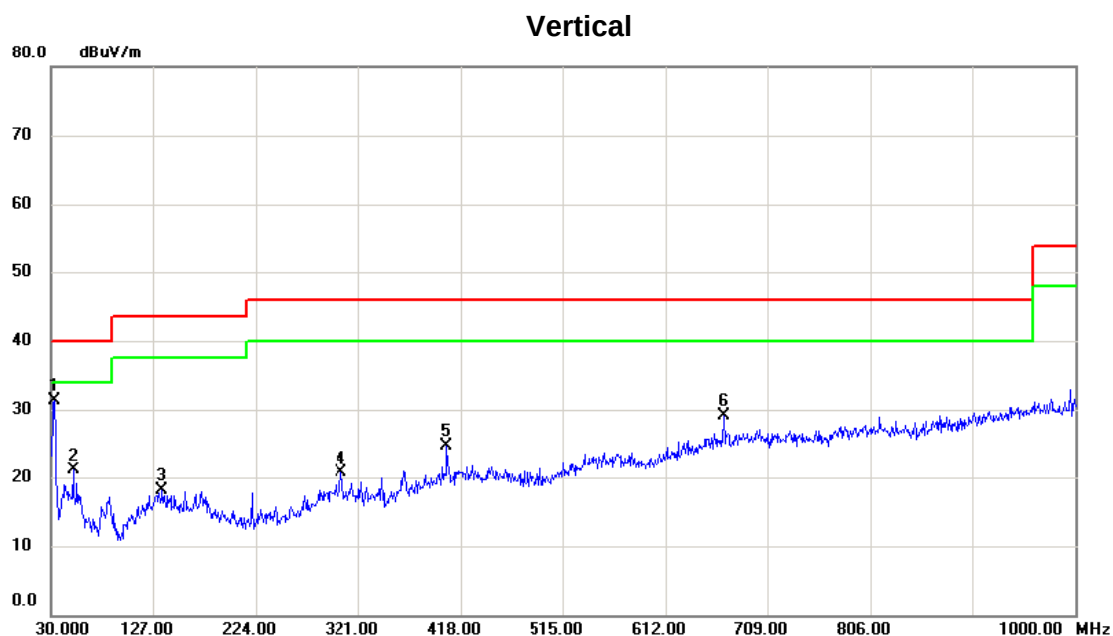

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	32.910	44.64	-13.36	31.28	40.00	-8.72	peak	
2		50.855	33.35	-12.23	21.12	40.00	-18.88	peak	
3		135.730	29.65	-11.56	18.09	43.50	-25.41	peak	
4		304.995	30.64	-10.02	20.62	46.00	-25.38	peak	
5		404.905	31.97	-7.19	24.78	46.00	-21.22	peak	
6		666.320	30.45	-1.35	29.10	46.00	-16.90	peak	

Test Mode: UNII-3/TX A Mode 5825MHz _ Adapter: HUNTKEY


Horizontal

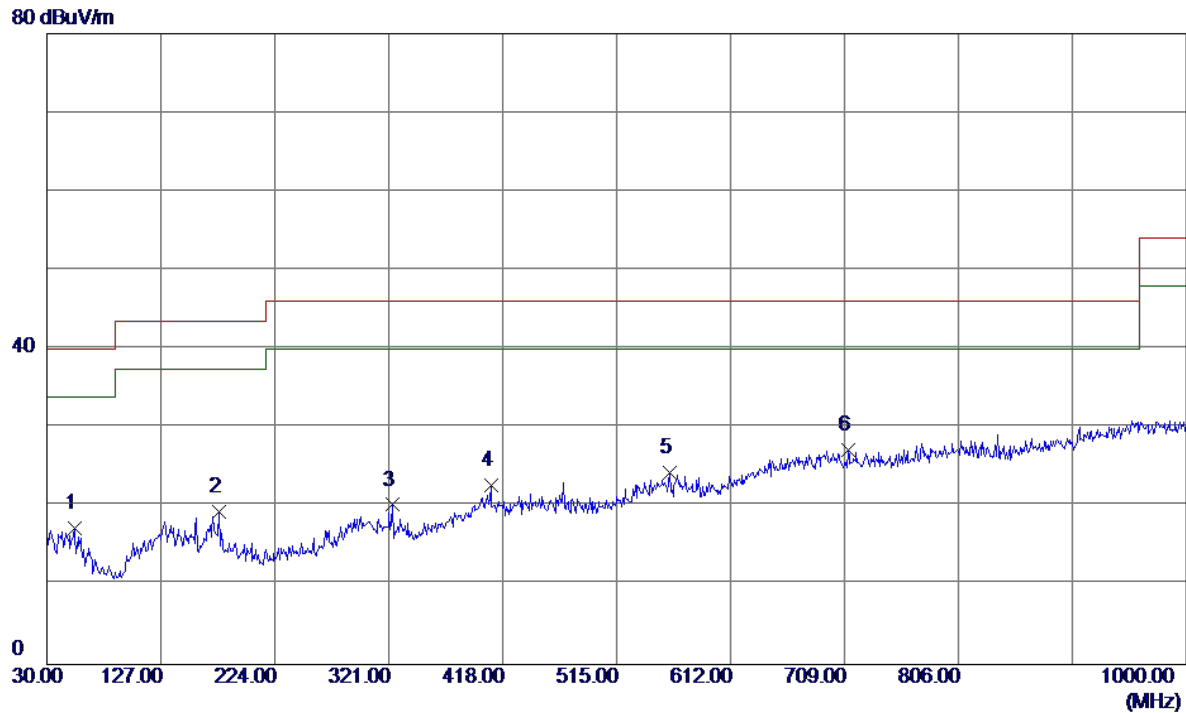

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	53.7650	29.45	-12.24	17.21	40.00	-22.79	Peak	
2	176.9550	31.08	-11.71	19.37	43.50	-24.13	Peak	
3	323.9100	30.58	-10.34	20.24	46.00	-25.76	Peak	
4	407.8150	29.86	-7.18	22.68	46.00	-23.32	Peak	
5	560.1050	28.78	-4.52	24.26	46.00	-21.74	Peak	
6 *	711.9099	27.90	-0.70	27.20	46.00	-18.80	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_ Adapter: PHITEK


Vertical

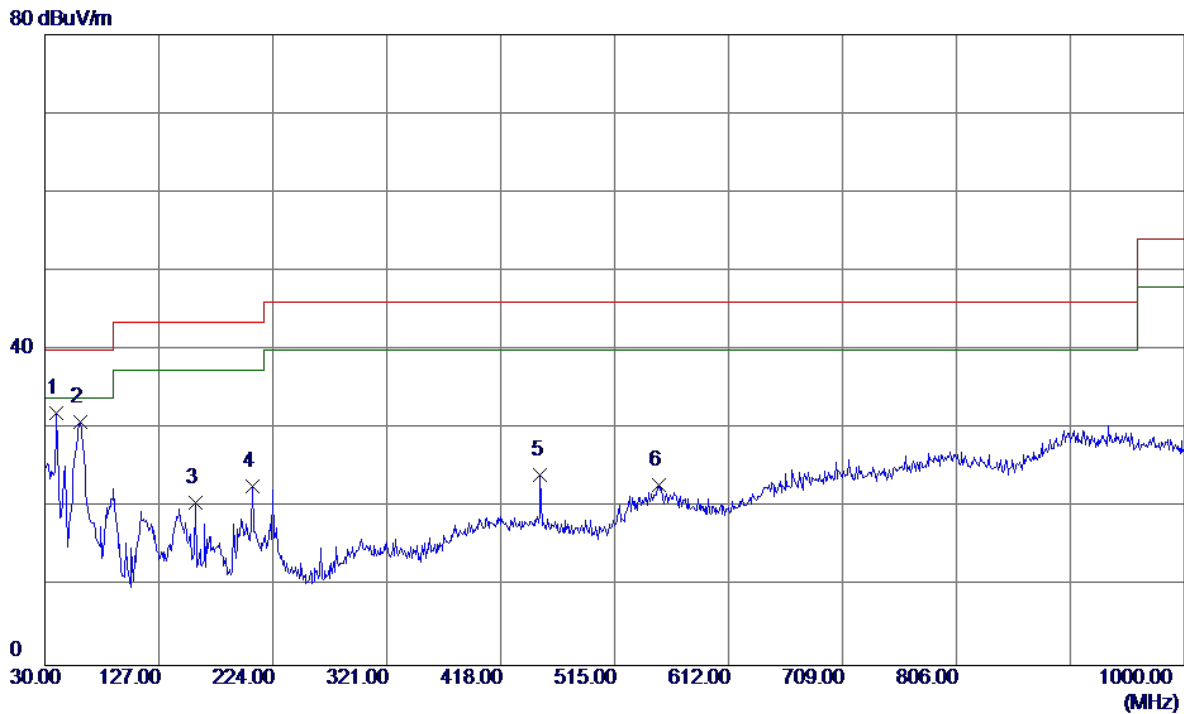

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	40.1850	45.83	-13.88	31.95	40.00	-8.05	Peak	
2	60.0700	44.62	-13.74	30.88	40.00	-9.12	Peak	
3	158.0399	33.01	-12.30	20.71	43.50	-22.79	Peak	
4	206.5399	37.28	-14.57	22.71	43.50	-20.79	Peak	
5	451.9500	32.16	-8.07	24.09	46.00	-21.91	Peak	
6	552.3449	27.59	-4.66	22.93	46.00	-23.07	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz _ Adapter: PHITEK


Horizontal

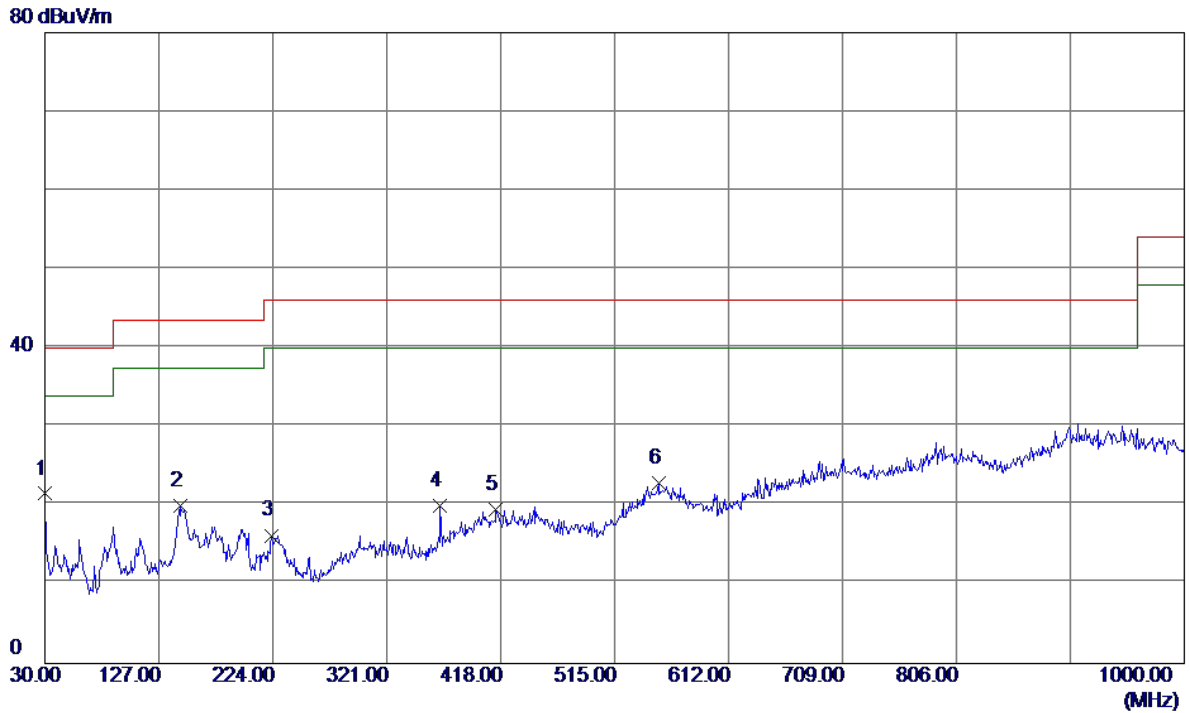

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	35.55	-14.03	21.52	40.00	-18.48	Peak	
2	145.4299	33.33	-13.32	20.01	43.50	-23.49	Peak	
3	223.0300	30.23	-13.99	16.24	46.00	-29.76	Peak	
4	366.5900	30.04	-10.08	19.96	46.00	-26.04	Peak	
5	414.1200	27.37	-7.84	19.53	46.00	-26.47	Peak	
6	552.3449	27.48	-4.66	22.82	46.00	-23.18	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_ Adapter: PHITEK


Vertical

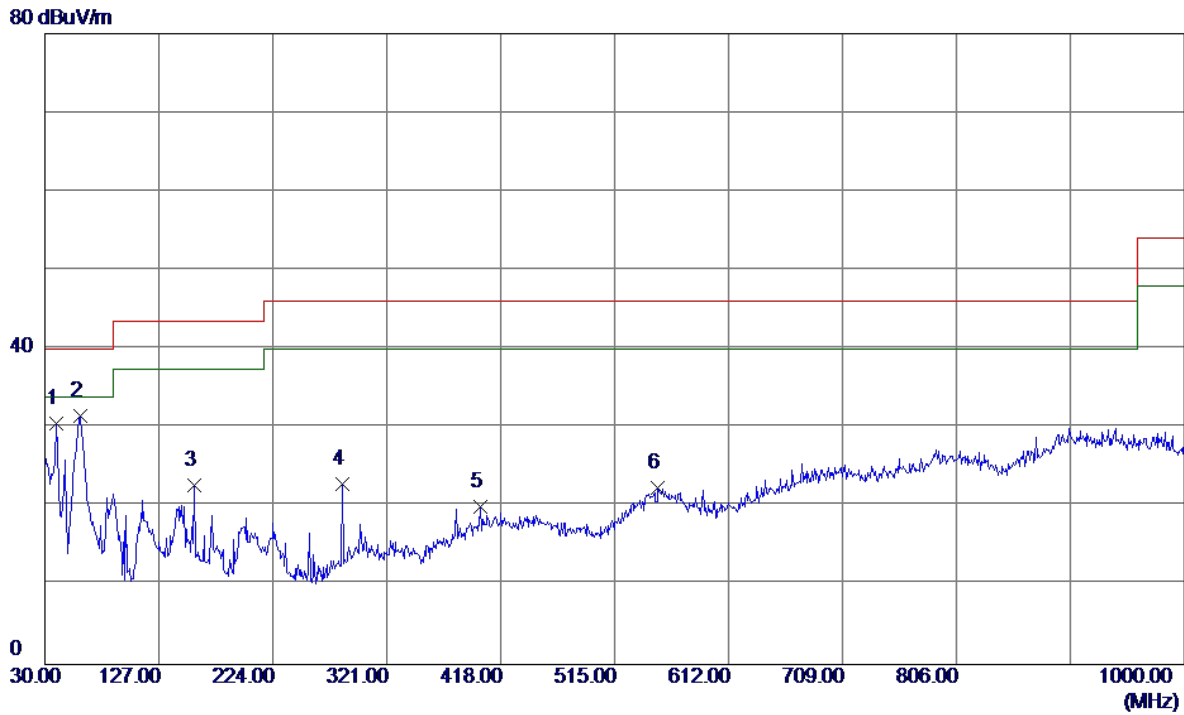

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39.7000	44.58	-13.95	30.63	40.00	-9.37	Peak	
2 *	60.0700	45.26	-13.74	31.52	40.00	-8.48	Peak	
3	157.0700	35.07	-12.38	22.69	43.50	-20.81	Peak	
4	283.6550	34.61	-11.75	22.86	46.00	-23.14	Peak	
5	400.5400	27.75	-7.78	19.97	46.00	-26.03	Peak	
6	551.8600	27.10	-4.63	22.47	46.00	-23.53	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_ Adapter: PHITEK


Horizontal

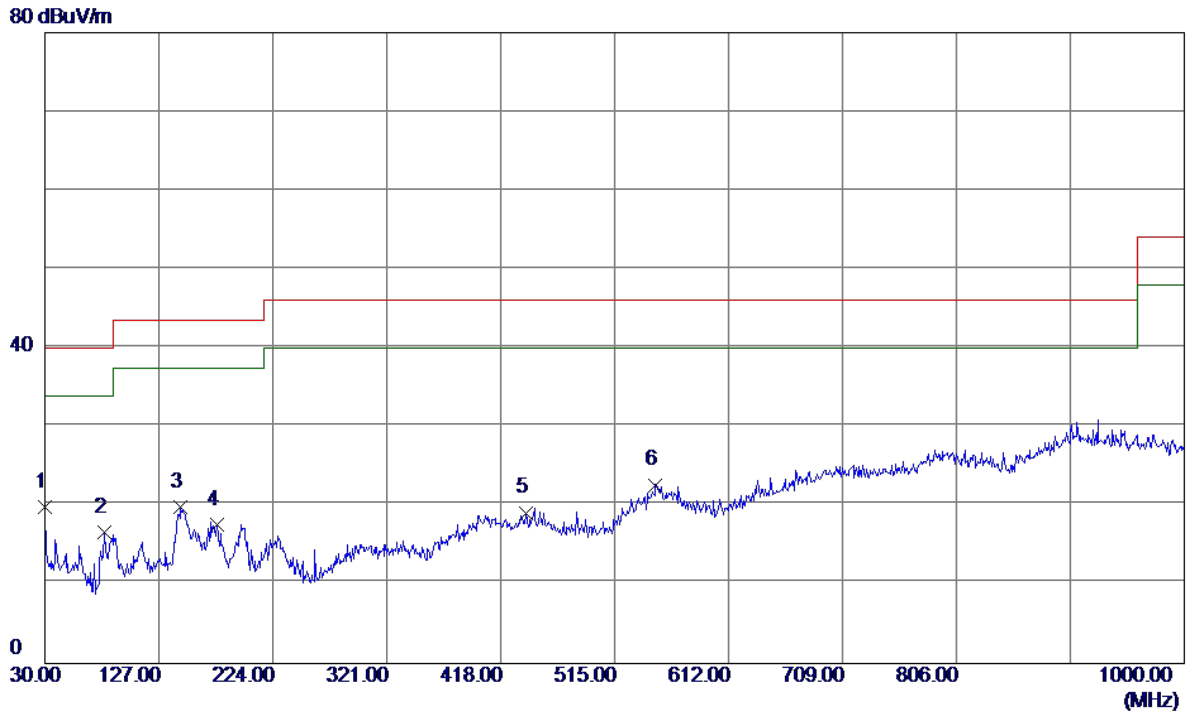

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	33.85	-14.03	19.82	40.00	-20.18	Peak	
2	80.9250	32.90	-16.29	16.61	40.00	-23.39	Peak	
3	145.4299	33.09	-13.32	19.77	43.50	-23.73	Peak	
4	176.4700	30.25	-12.63	17.62	43.50	-25.88	Peak	
5	439.3400	27.07	-7.95	19.12	46.00	-26.88	Peak	
6	549.9200	27.19	-4.55	22.64	46.00	-23.36	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_ Adapter: PHITEK


Vertical

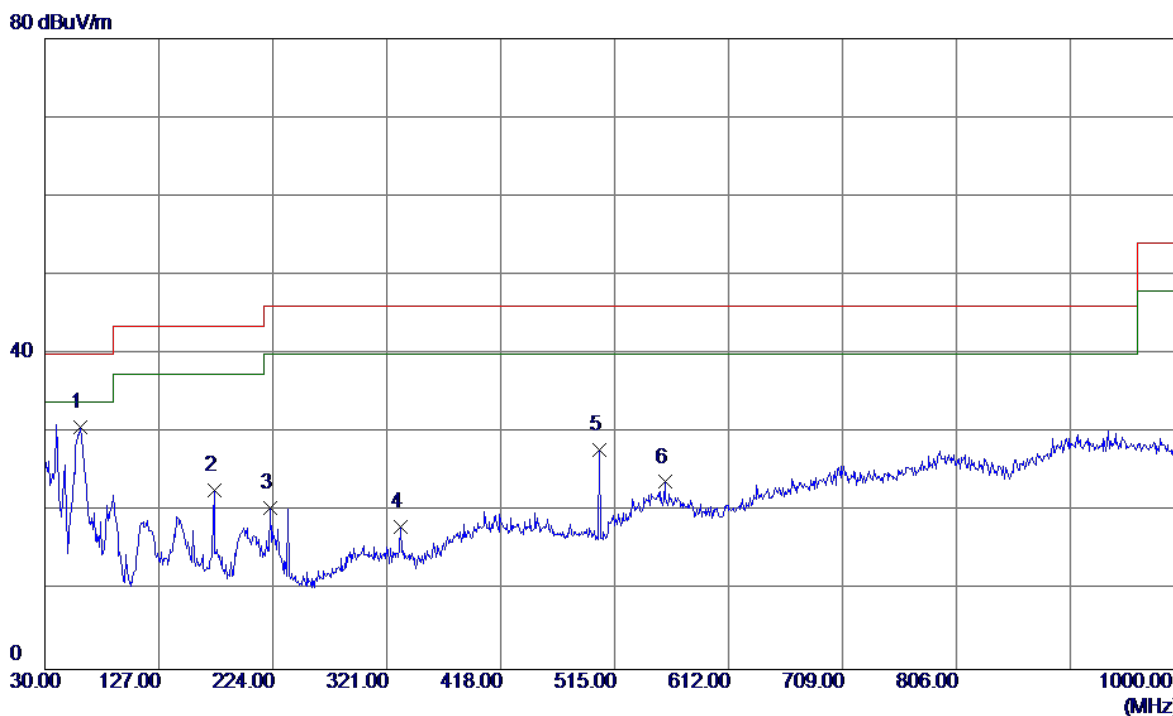

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	60.0700	44.49	-13.74	30.75	40.00	-9.25	Peak	
2	174.0450	35.17	-12.48	22.69	43.50	-20.81	Peak	
3	221.5750	34.67	-14.12	20.55	46.00	-25.45	Peak	
4	332.6400	28.90	-10.85	18.05	46.00	-27.95	Peak	
5	501.9050	37.43	-9.52	27.91	46.00	-18.09	Peak	
6	558.1650	28.71	-4.95	23.76	46.00	-22.24	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_ Adapter: PHITEK

Horizontal

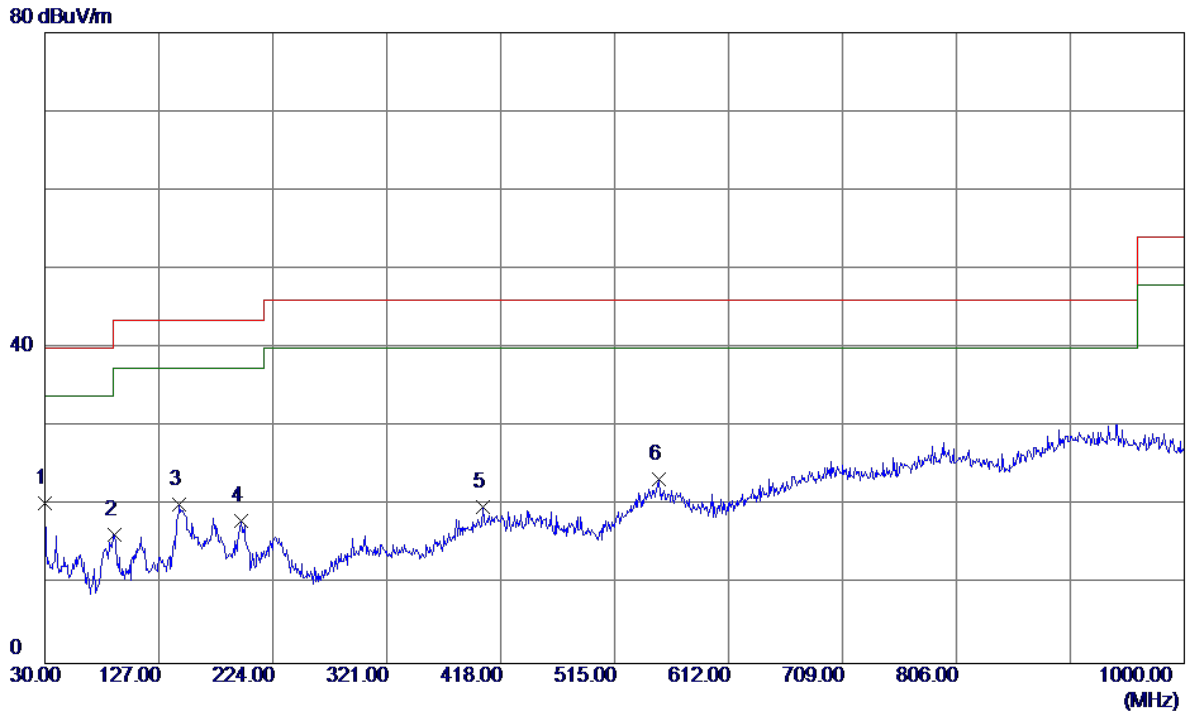


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	34.33	-14.03	20.30	40.00	-19.70	Peak	
2	89.1700	33.77	-17.44	16.33	43.50	-27.17	Peak	
3	144.4600	33.62	-13.39	20.23	43.50	-23.27	Peak	
4	197.3250	32.45	-14.30	18.15	43.50	-25.35	Peak	
5	402.9650	27.57	-7.79	19.78	46.00	-26.22	Peak	
6	552.3449	28.01	-4.66	23.35	46.00	-22.65	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz _ Adapter: PHITEK

Vertical

80 dBuV/m

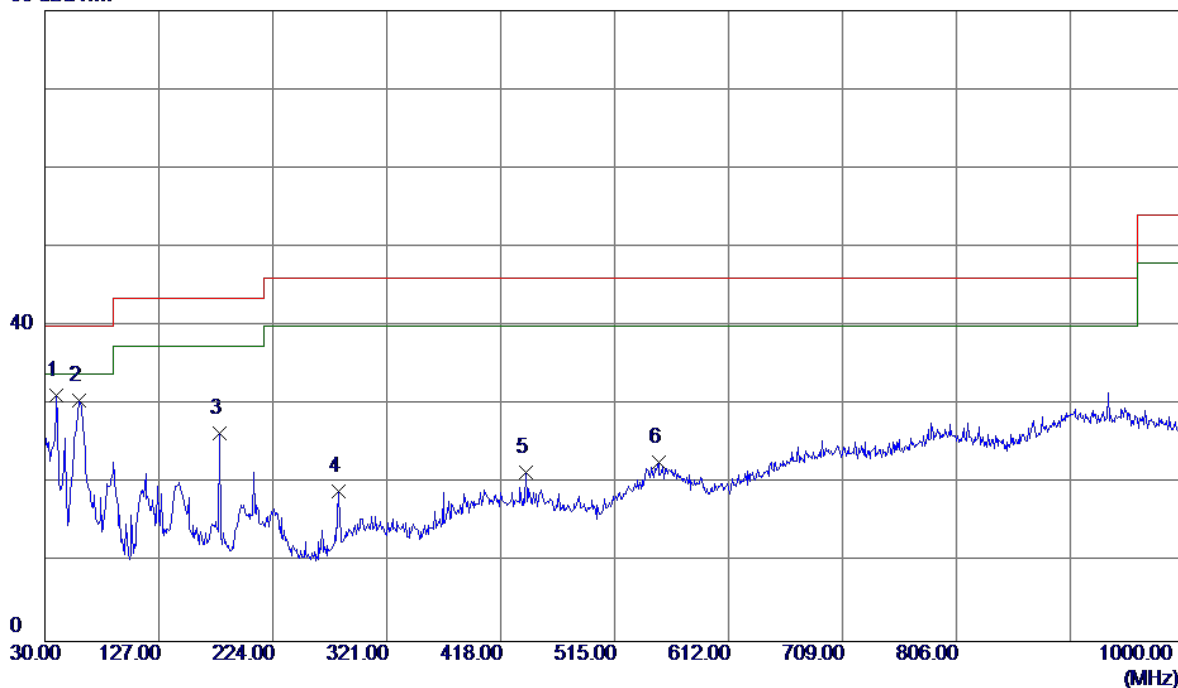


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	45.16	-13.95	31.21	40.00	-8.79	Peak	
2	59.1000	44.28	-13.77	30.51	40.00	-9.49	Peak	
3	178.4100	39.17	-12.74	26.43	43.50	-17.07	Peak	
4	279.7750	31.09	-12.07	19.02	46.00	-26.98	Peak	
5	439.3400	29.40	-7.95	21.45	46.00	-24.55	Peak	
6	552.3449	27.35	-4.66	22.69	46.00	-23.31	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_ Adapter: PHITEK

Horizontal


80 dBuV/m

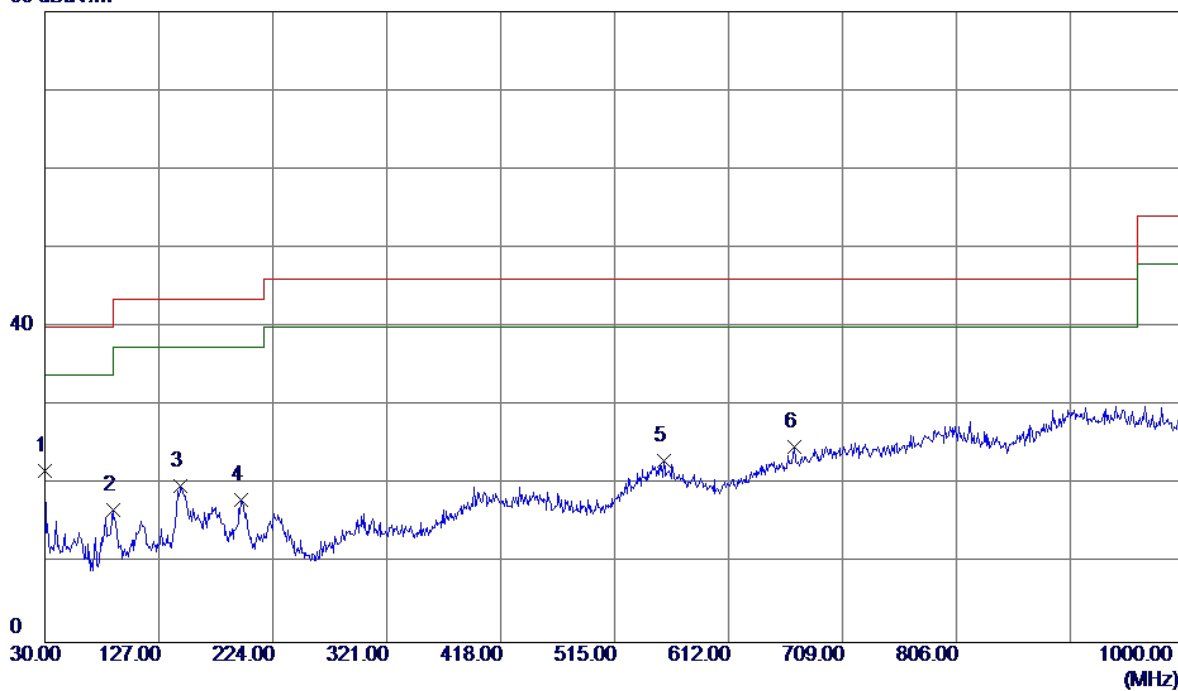

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	35.73	-14.03	21.70	40.00	-18.30	Peak	
2	87.7149	34.30	-17.43	16.87	40.00	-23.13	Peak	
3	145.4299	33.16	-13.32	19.84	43.50	-23.66	Peak	
4	197.3250	32.34	-14.30	18.04	43.50	-25.46	Peak	
5	557.1950	27.99	-4.90	23.09	46.00	-22.91	Peak	
6	667.7750	28.29	-3.44	24.85	46.00	-21.15	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_ Adapter: PHITEK


Vertical

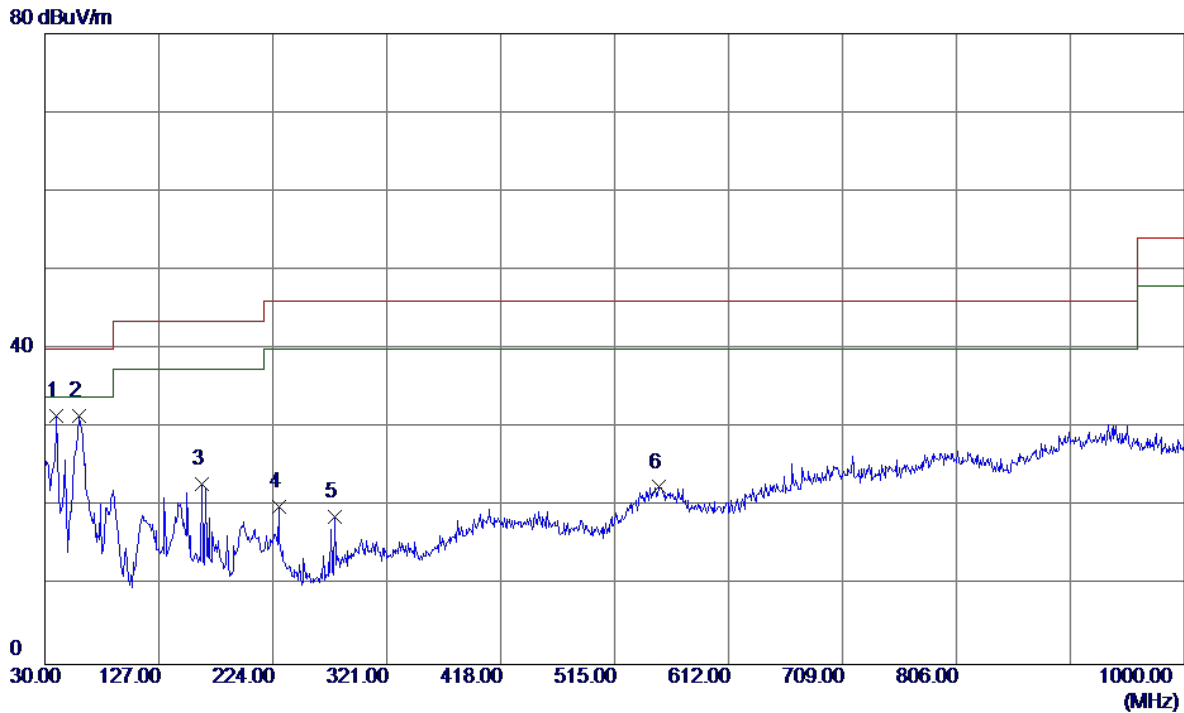

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39.7000	45.44	-13.95	31.49	40.00	-8.51	Peak	
2 *	58.6150	45.32	-13.80	31.52	40.00	-8.48	Peak	
3	163.3750	35.11	-12.18	22.93	43.50	-20.57	Peak	
4	229.3350	33.40	-13.43	19.97	46.00	-26.03	Peak	
5	276.8650	31.20	-12.47	18.73	46.00	-27.27	Peak	
6	552.8300	27.16	-4.68	22.48	46.00	-23.52	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_ Adapter: PHITEK

Horizontal

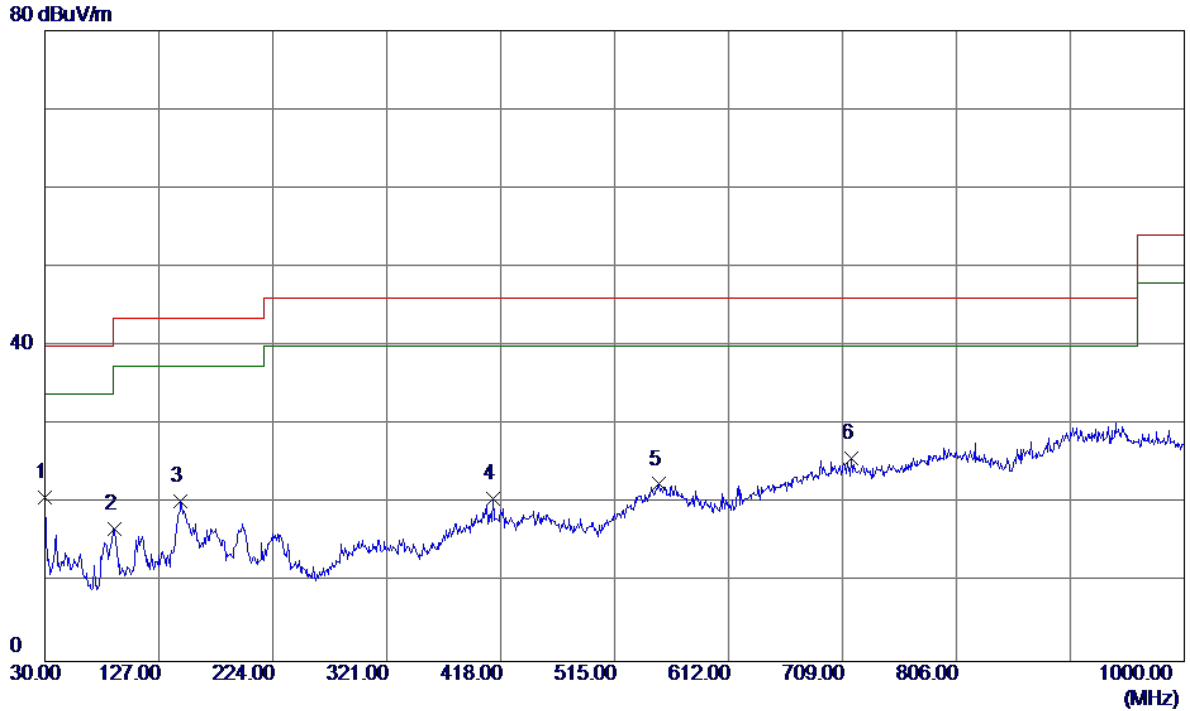


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	34.84	-14.03	20.81	40.00	-19.19	Peak	
2	89.1700	34.25	-17.44	16.81	43.50	-26.69	Peak	
3	145.4299	33.60	-13.32	20.28	43.50	-23.22	Peak	
4	411.6950	28.54	-7.83	20.71	46.00	-25.29	Peak	
5	552.8300	27.16	-4.68	22.48	46.00	-23.52	Peak	
6	716.7600	27.78	-2.06	25.72	46.00	-20.28	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_ Adapter: PHITEK

Vertical


80 dBuV/m

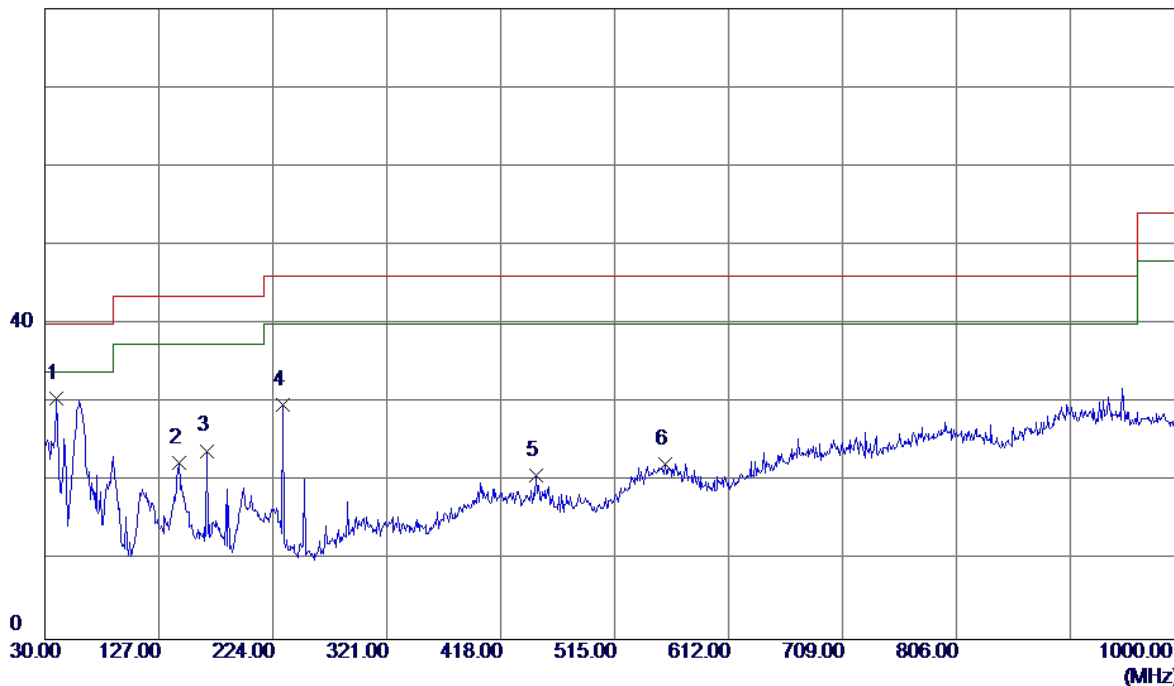

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.7000	44.56	-13.95	30.61	40.00	-9.39	Peak	
2	143.9750	35.82	-13.43	22.39	43.50	-21.11	Peak	
3	168.2250	36.14	-12.22	23.92	43.50	-19.58	Peak	
4	232.7300	43.21	-13.48	29.73	46.00	-16.27	Peak	
5	448.5550	28.79	-7.99	20.80	46.00	-25.20	Peak	
6	557.6800	27.22	-4.93	22.29	46.00	-23.71	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_ Adapter: PHITEK


Horizontal

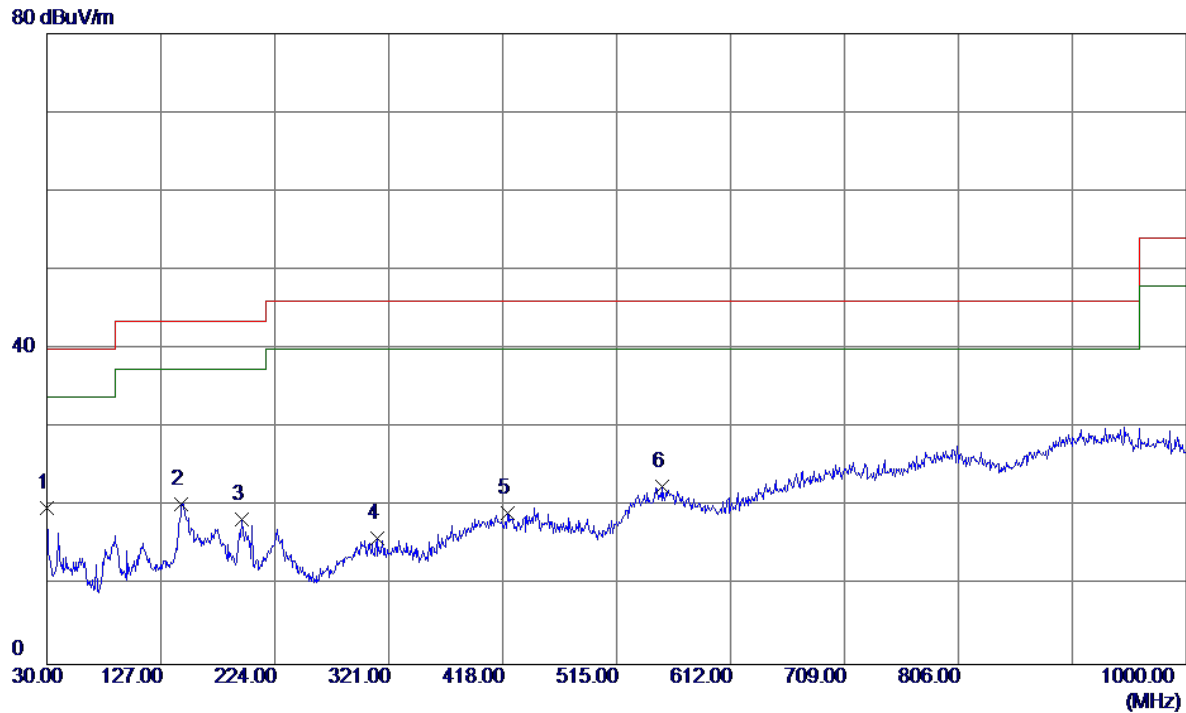

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	33.85	-14.03	19.82	40.00	-20.18	Peak	
2	144.4600	33.77	-13.39	20.38	43.50	-23.12	Peak	
3	196.3550	32.71	-14.25	18.46	43.50	-25.04	Peak	
4	310.8150	26.34	-10.39	15.95	46.00	-30.05	Peak	
5	422.3650	27.15	-7.88	19.27	46.00	-26.73	Peak	
6	553.8000	27.29	-4.73	22.56	46.00	-23.44	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_ Adapter: PHITEK


Vertical

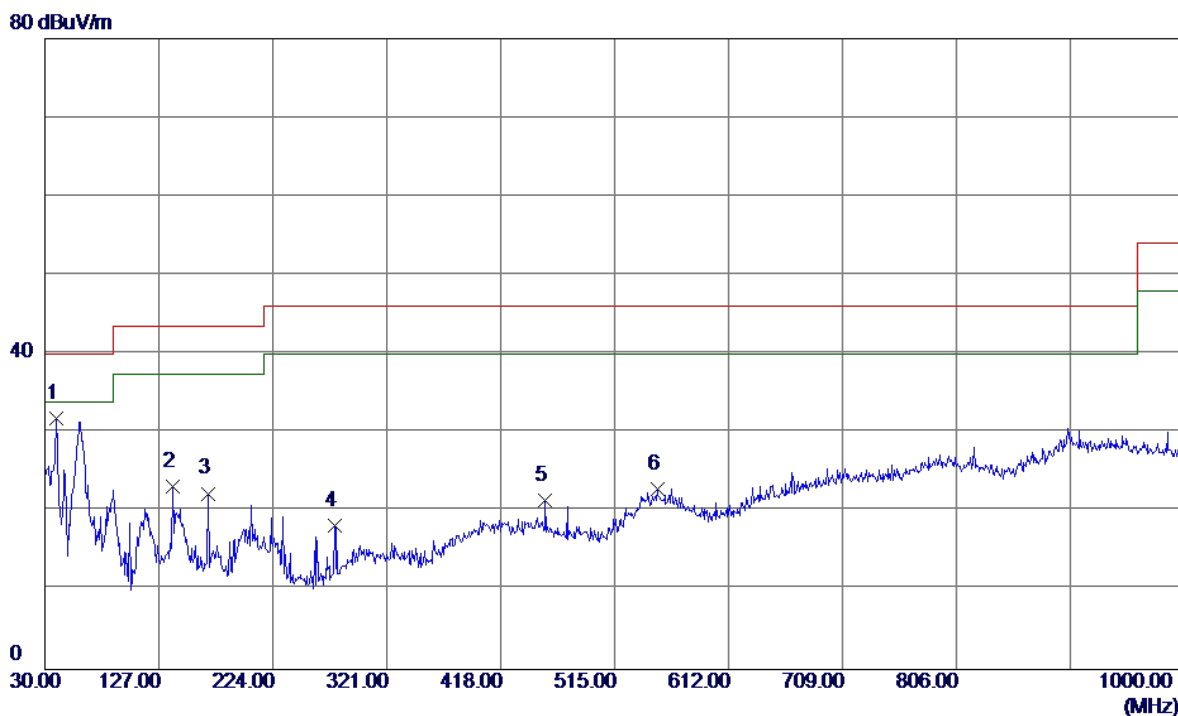

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.2150	45.91	-14.00	31.91	40.00	-8.09	Peak	
2	138.6400	36.79	-13.56	23.23	43.50	-20.27	Peak	
3	169.1950	34.55	-12.23	22.32	43.50	-21.18	Peak	
4	276.3800	30.72	-12.54	18.18	46.00	-27.82	Peak	
5	455.8300	29.60	-8.20	21.40	46.00	-24.60	Peak	
6	551.3750	27.49	-4.61	22.88	46.00	-23.12	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_ Adapter: PHITEK


Horizontal

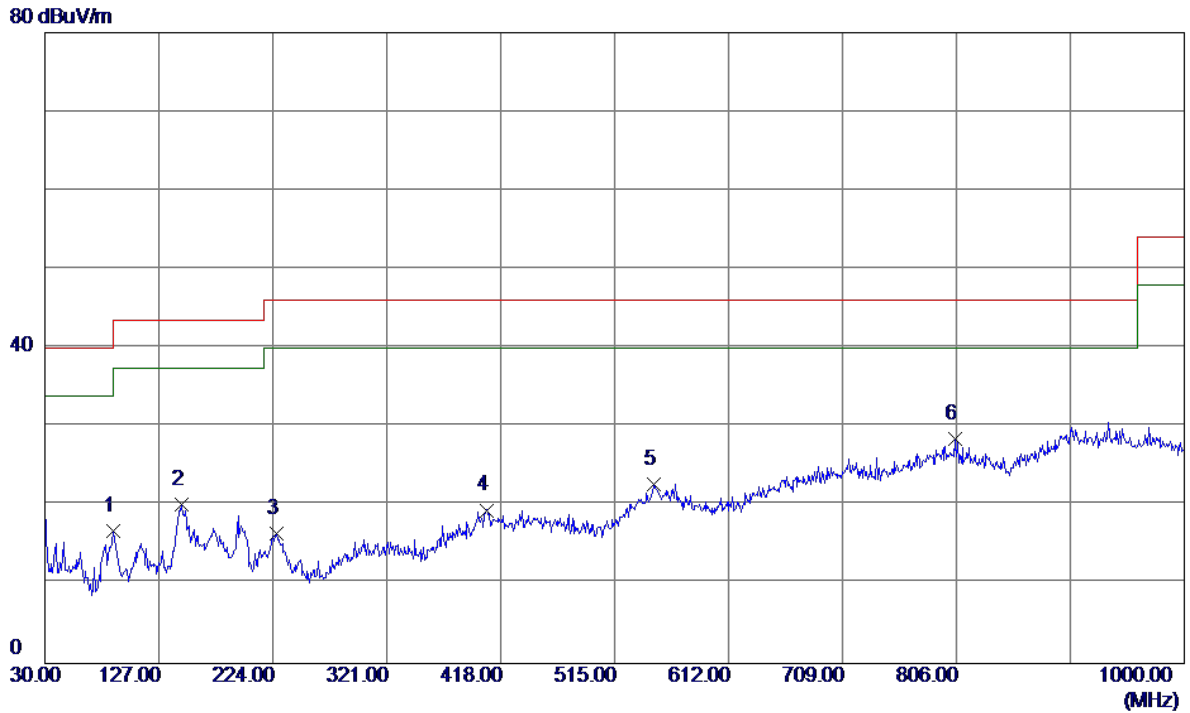

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	88.6850	34.24	-17.44	16.80	43.50	-26.70	Peak	
2	146.4000	33.33	-13.24	20.09	43.50	-23.41	Peak	
3	227.3950	30.10	-13.60	16.50	46.00	-29.50	Peak	
4	405.8750	27.25	-7.81	19.44	46.00	-26.56	Peak	
5	548.4650	27.49	-4.70	22.79	46.00	-23.21	Peak	
6 *	804.5450	28.31	0.12	28.43	46.00	-17.57	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_ Adapter: PHITEK


Vertical

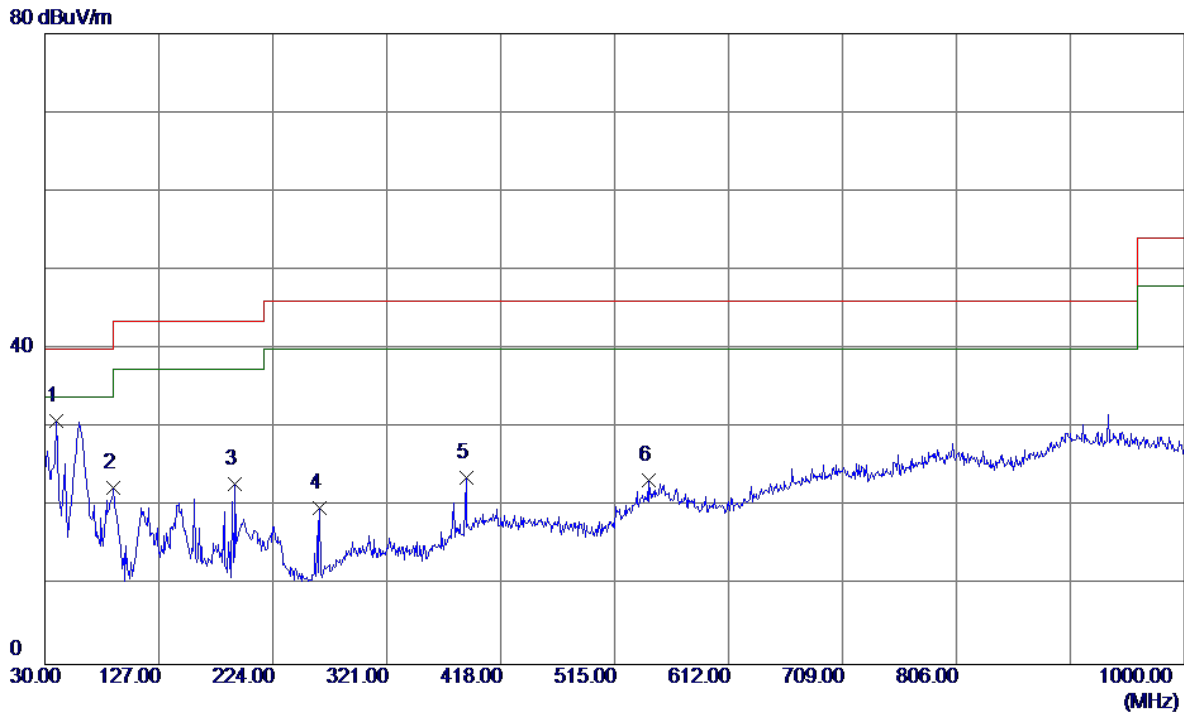

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39.2150	44.84	-14.00	30.84	40.00	-9.16	Peak	
2	88.2000	39.77	-17.43	22.34	43.50	-21.16	Peak	
3	191.9900	36.89	-14.03	22.86	43.50	-20.64	Peak	
4	264.2550	33.70	-13.87	19.83	46.00	-26.17	Peak	
5	388.4150	32.28	-8.58	23.70	46.00	-22.30	Peak	
6	543.6150	28.53	-5.20	23.33	46.00	-22.67	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_ Adapter: PHITEK

Horizontal

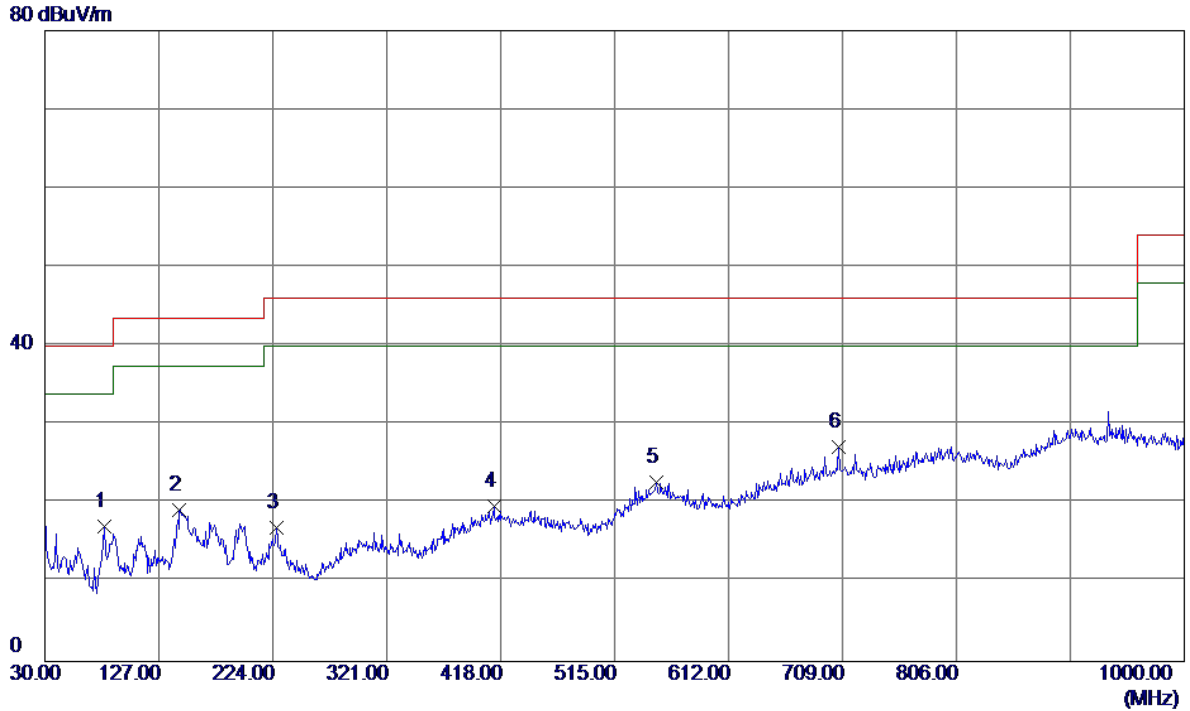


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	80.9250	33.47	-16.29	17.18	40.00	-22.82	Peak	
2	144.4600	32.65	-13.39	19.26	43.50	-24.24	Peak	
3	226.9100	30.61	-13.64	16.97	46.00	-29.03	Peak	
4	412.6650	27.52	-7.84	19.68	46.00	-26.32	Peak	
5	550.4050	27.30	-4.56	22.74	46.00	-23.26	Peak	
6 *	706.0900	29.24	-2.08	27.16	46.00	-18.84	Peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

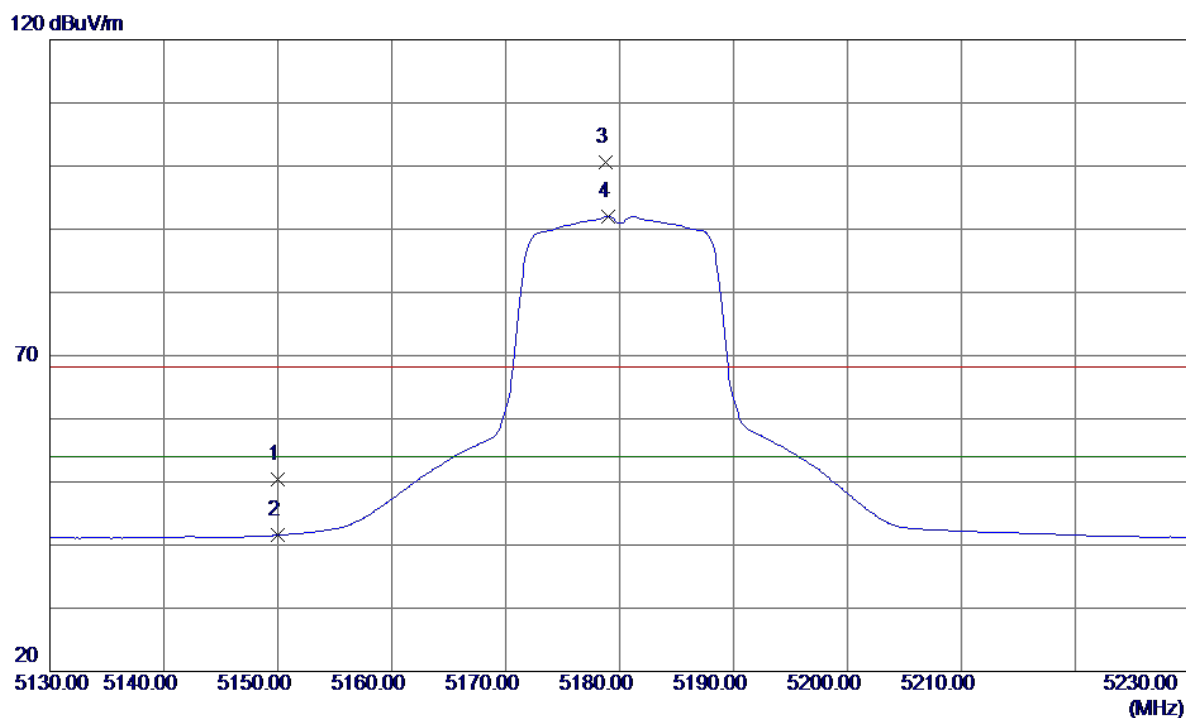


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.78	40.62	50.40	68.30	-17.90	Peak	
2	5150.0000	0.95	40.62	41.57	54.00	-12.43	AVG	
3	5178.8000	59.85	40.72	100.57	68.30	32.27	Peak	No Limit
4 *	5179.0000	51.25	40.72	91.97	54.00	37.97	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

110 dBuV/m

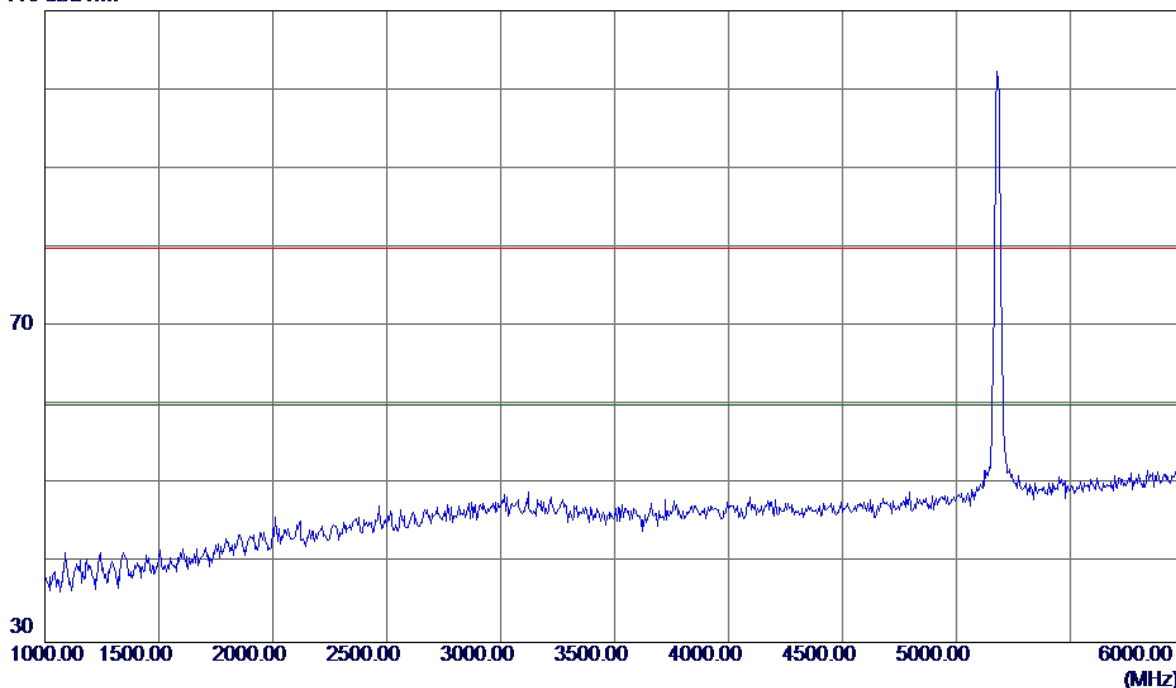


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

110 dBuV/m

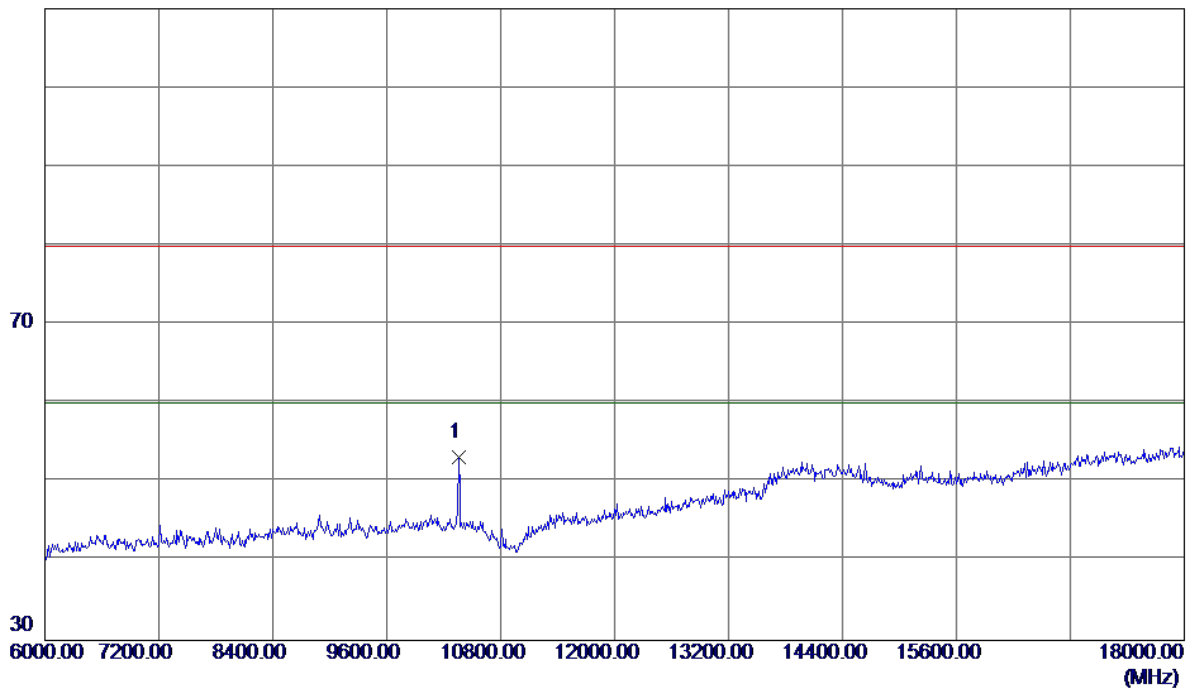


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10356.0000	37.96	15.22	53.18	80.00	-26.82	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

110 dBuV/m

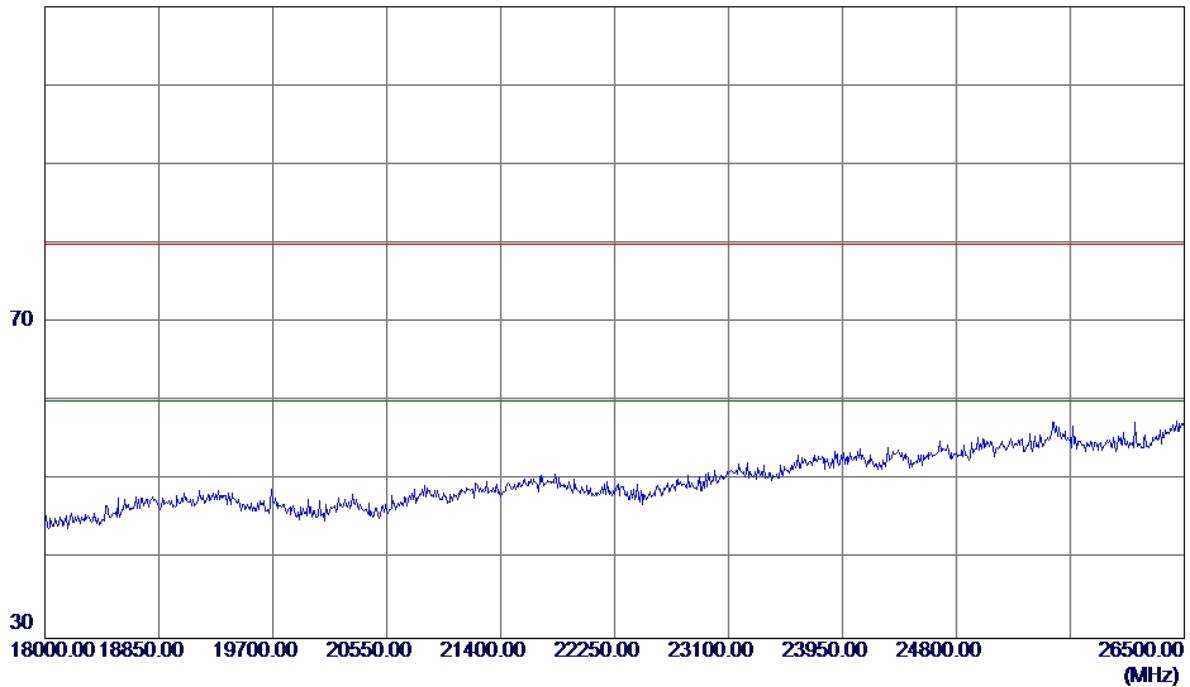


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical


110 dBuV/m

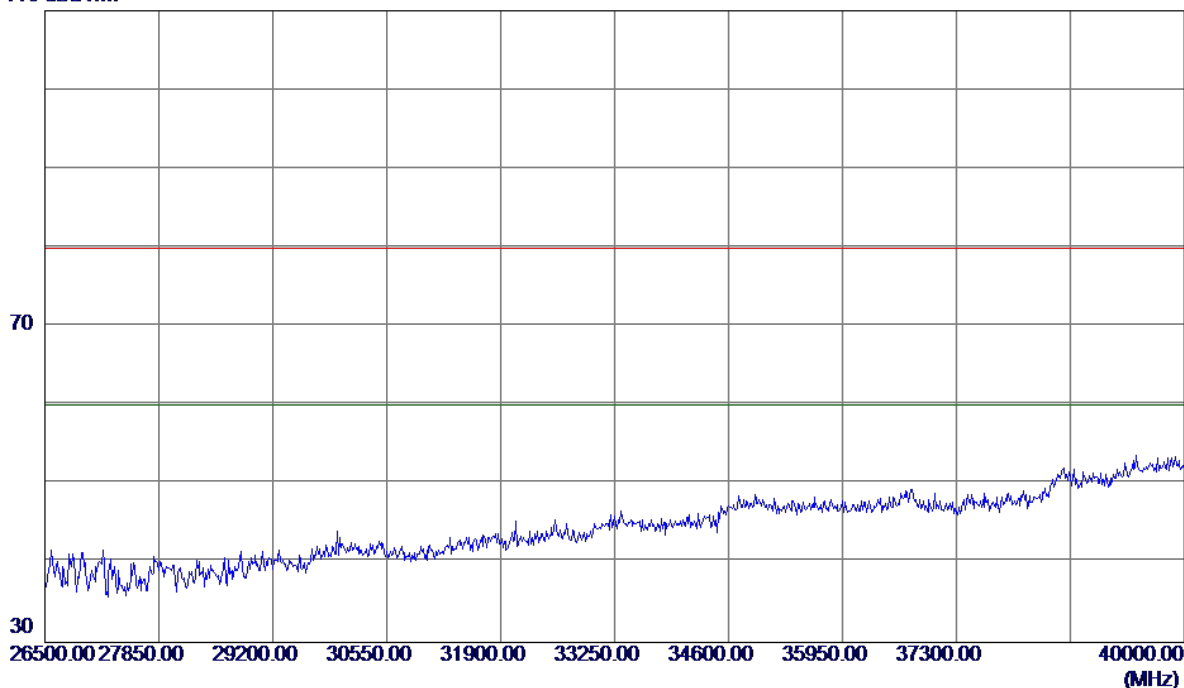

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

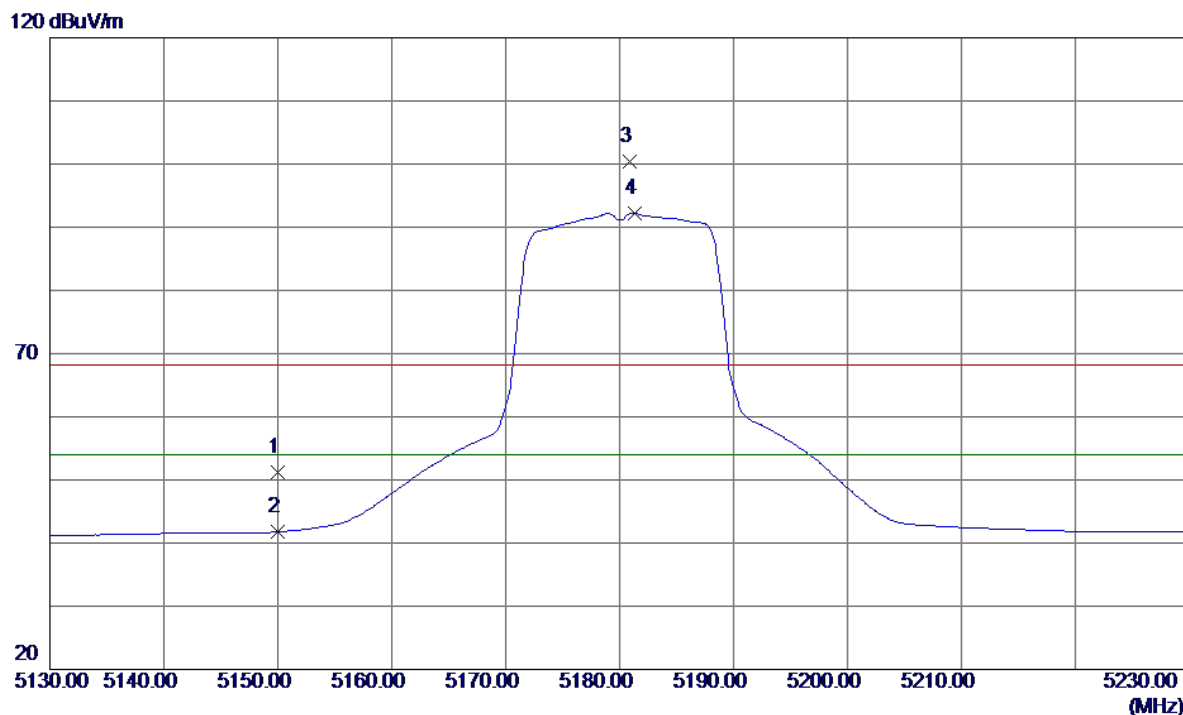


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	10.55	40.62	51.17	68.30	-17.13	Peak	
2	5150.0000	1.17	40.62	41.79	54.00	-12.21	AVG	
3	5180.9000	59.71	40.73	100.44	68.30	32.14	Peak	No Limit
4 *	5181.3000	51.50	40.73	92.23	54.00	38.23	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

110 dBuV/m

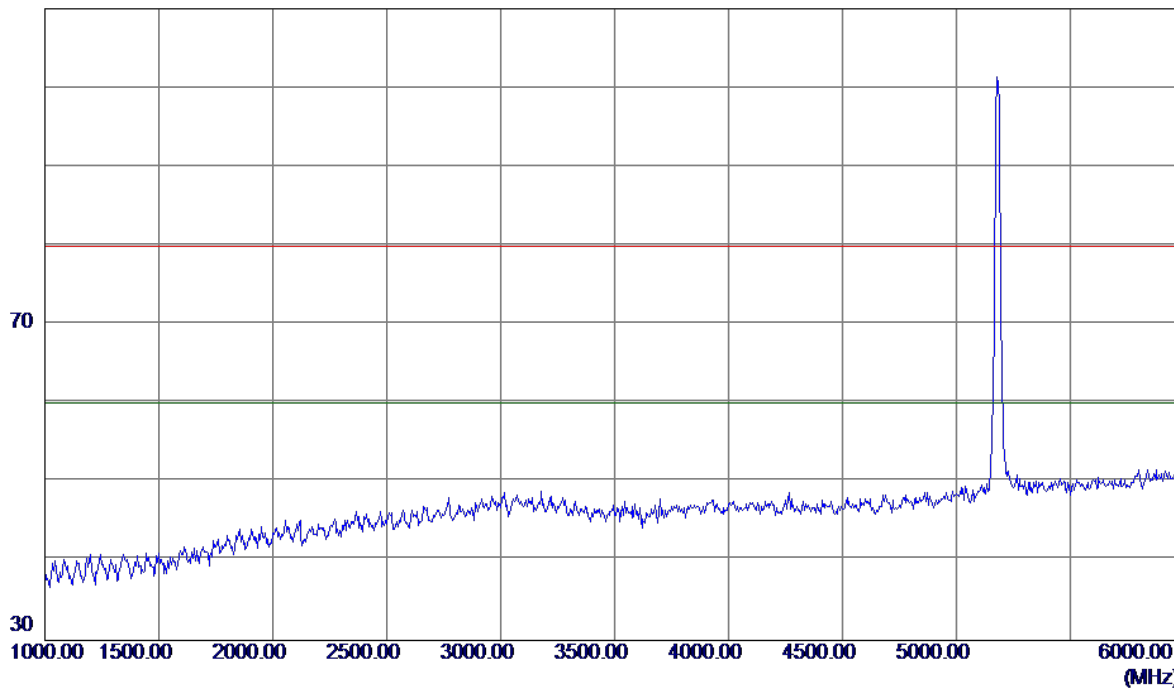


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

110 dBuV/m

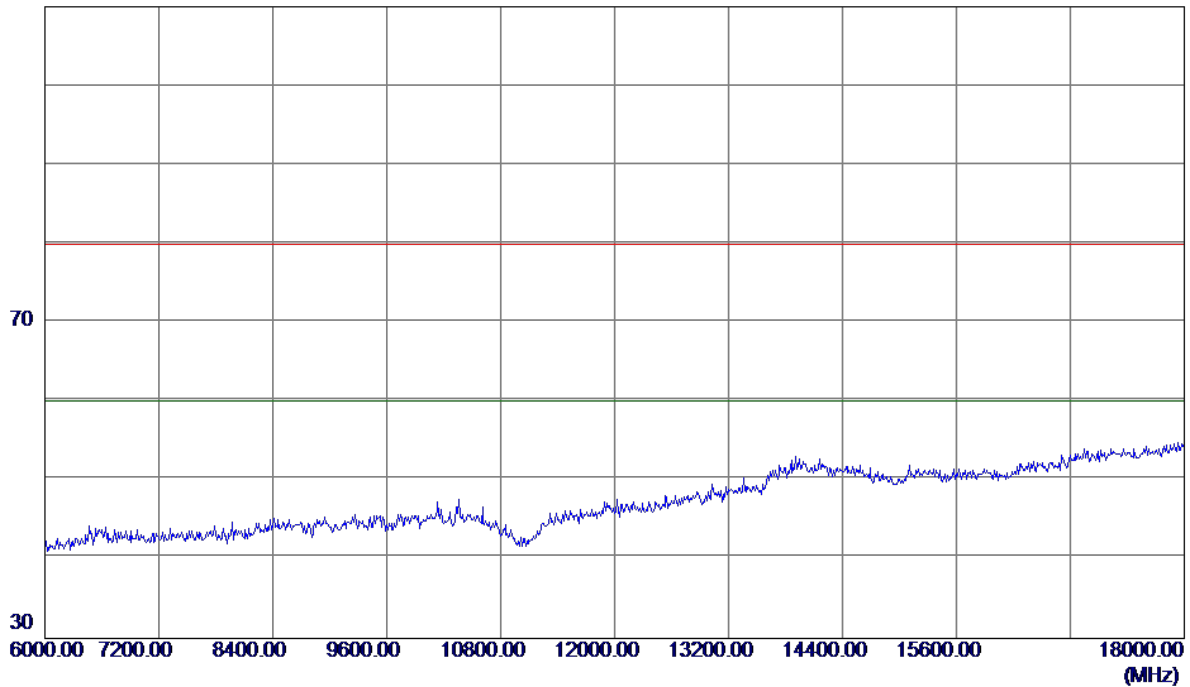


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

110 dBuV/m

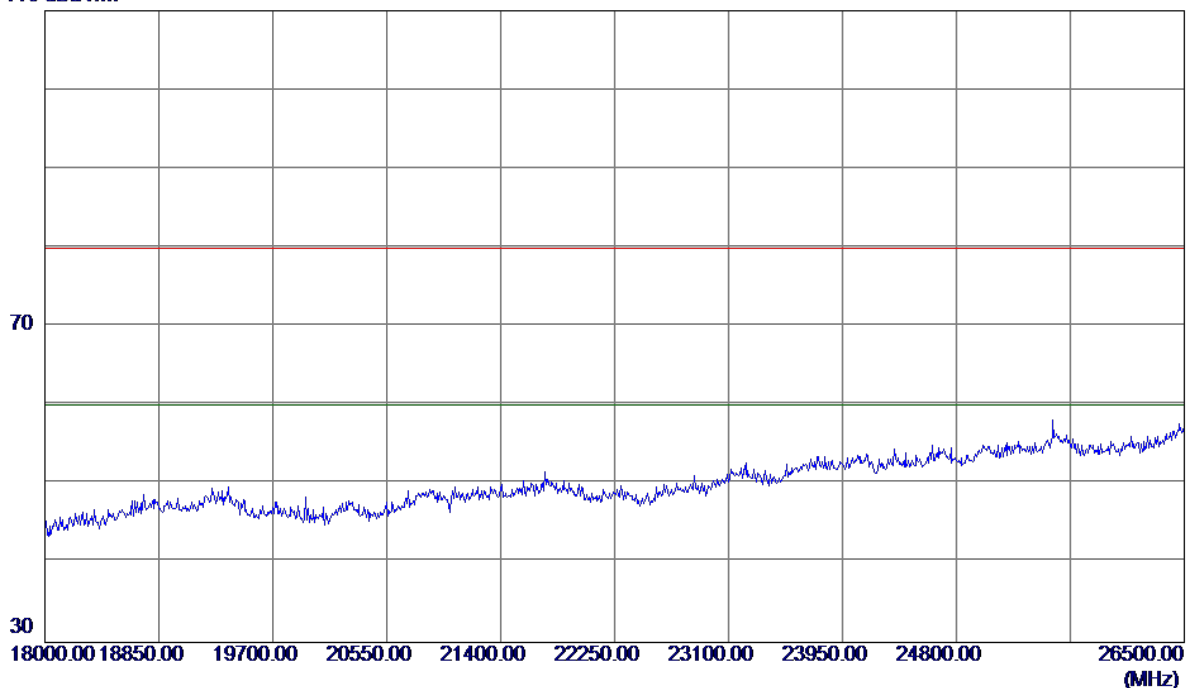


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal


110 dBuV/m

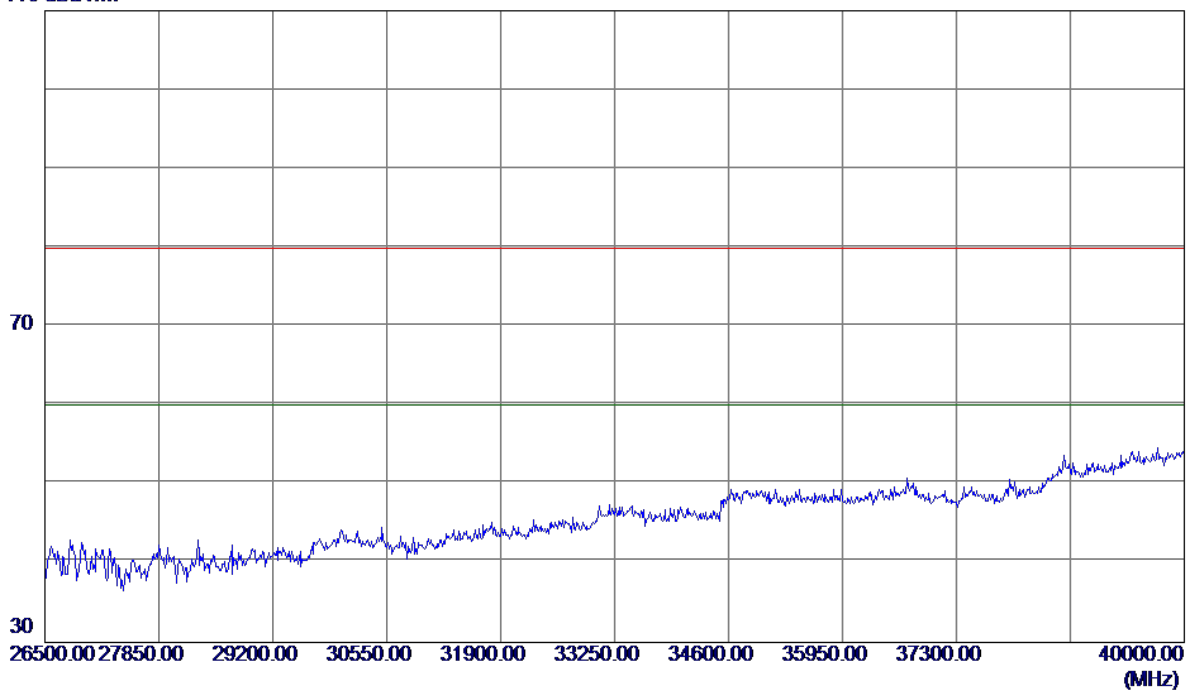

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

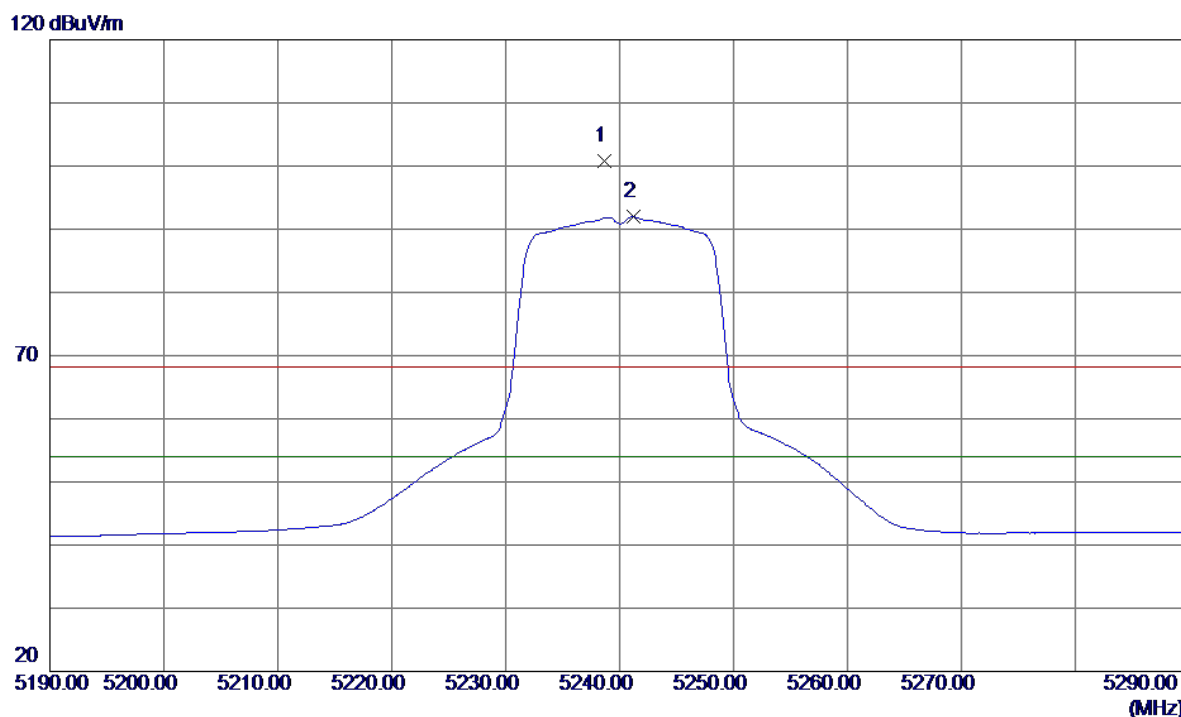


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5238.7000	59.94	40.92	100.86	68.30	32.56	Peak	No Limit
2 *	5241.2000	50.99	40.93	91.92	54.00	37.92	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

110 dBuV/m

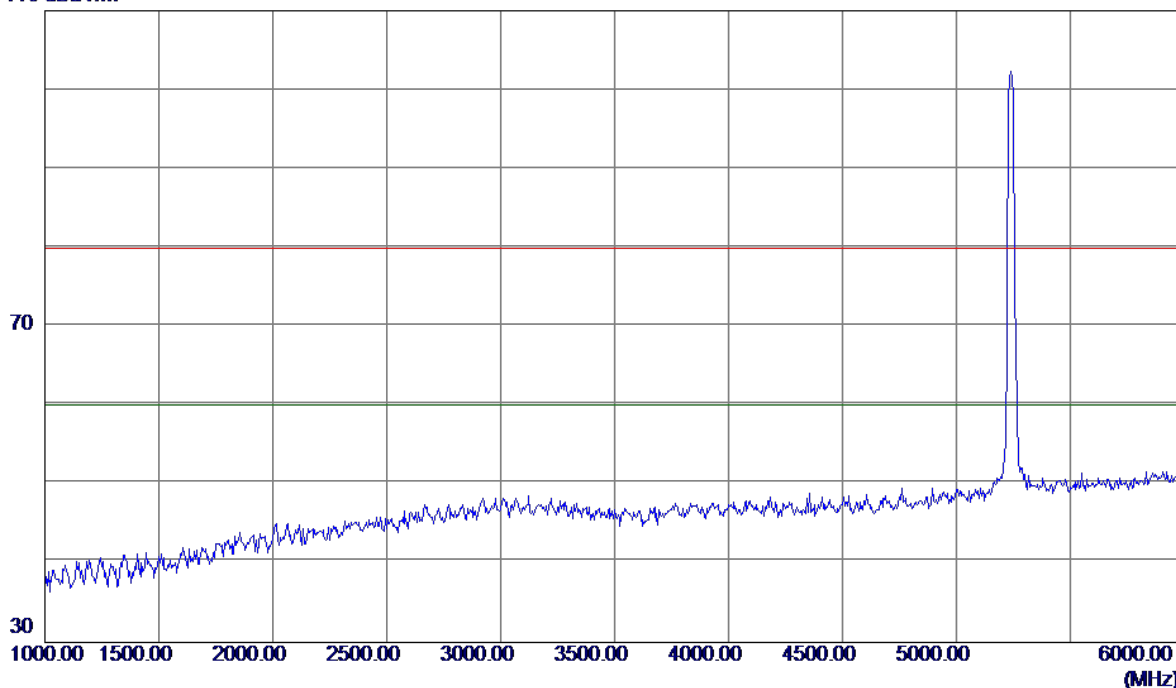


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

110 dBuV/m

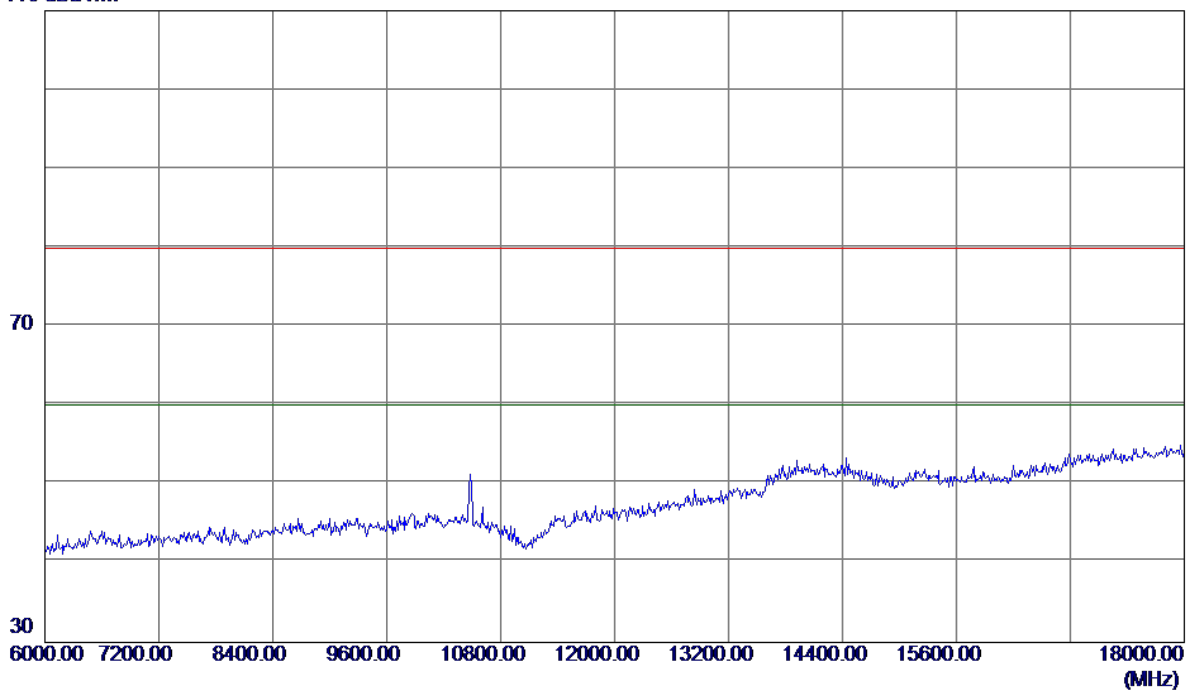


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

110 dBuV/m

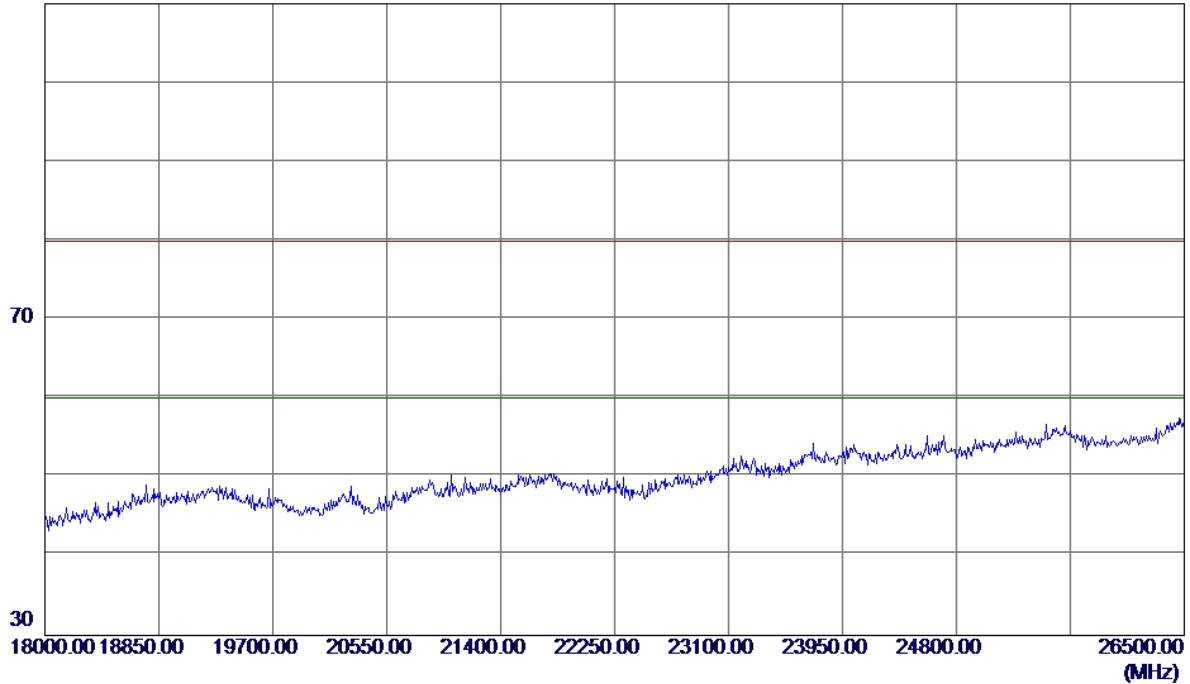


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical


110 dBuV/m

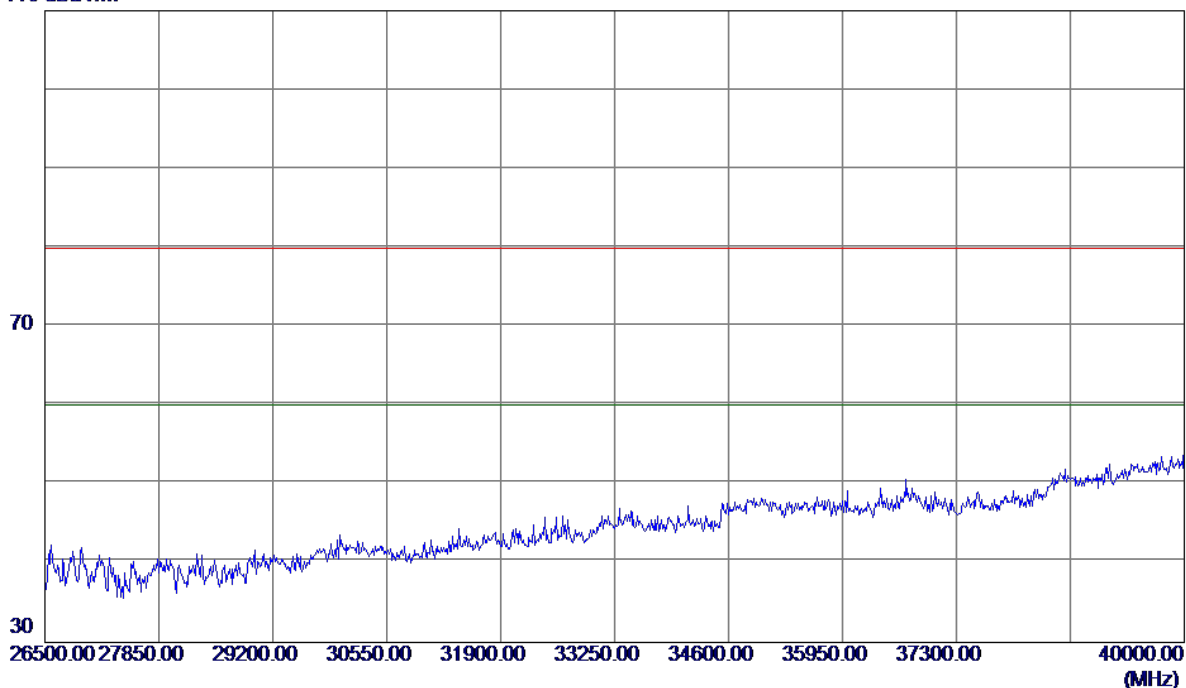

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

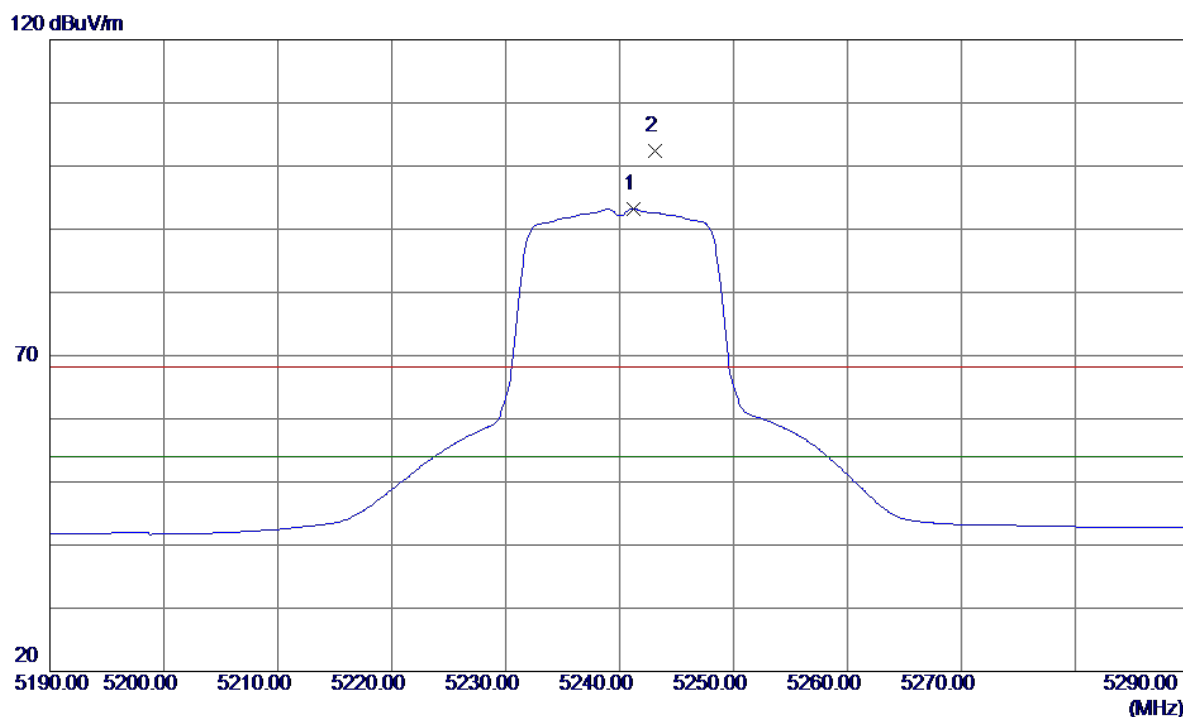


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5241.2000	52.27	40.93	93.20	54.00	39.20	AVG	No Limit
2	5243.1000	61.42	40.93	102.35	68.30	34.05	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

110 dBuV/m

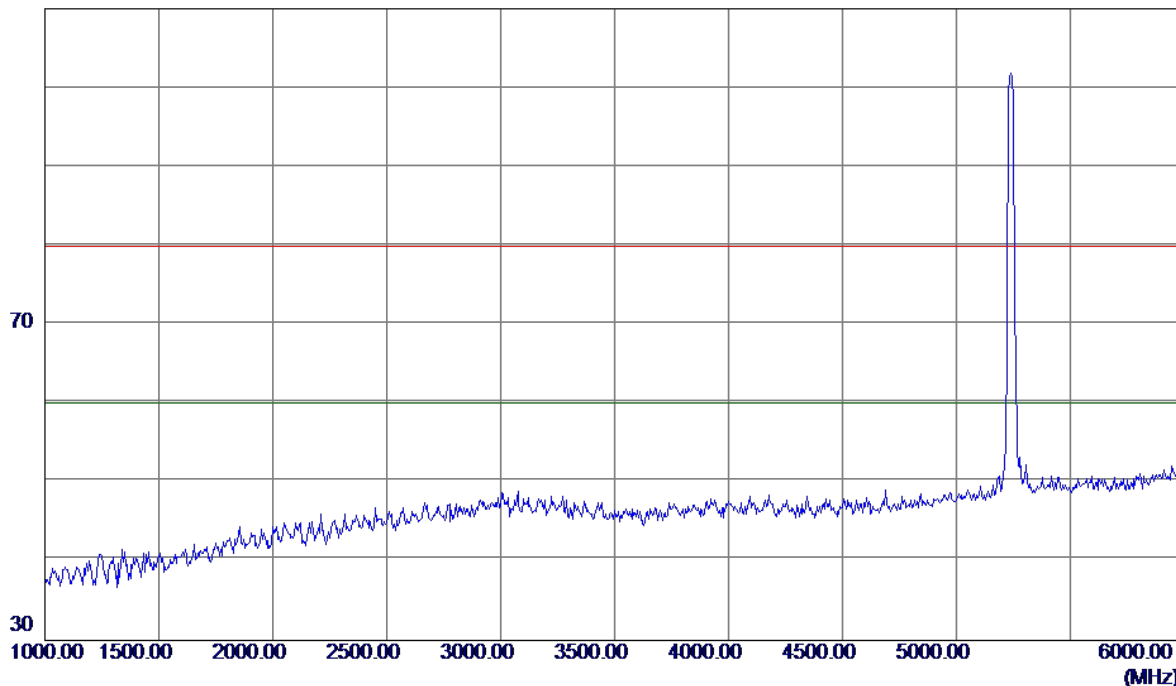


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

110 dBuV/m

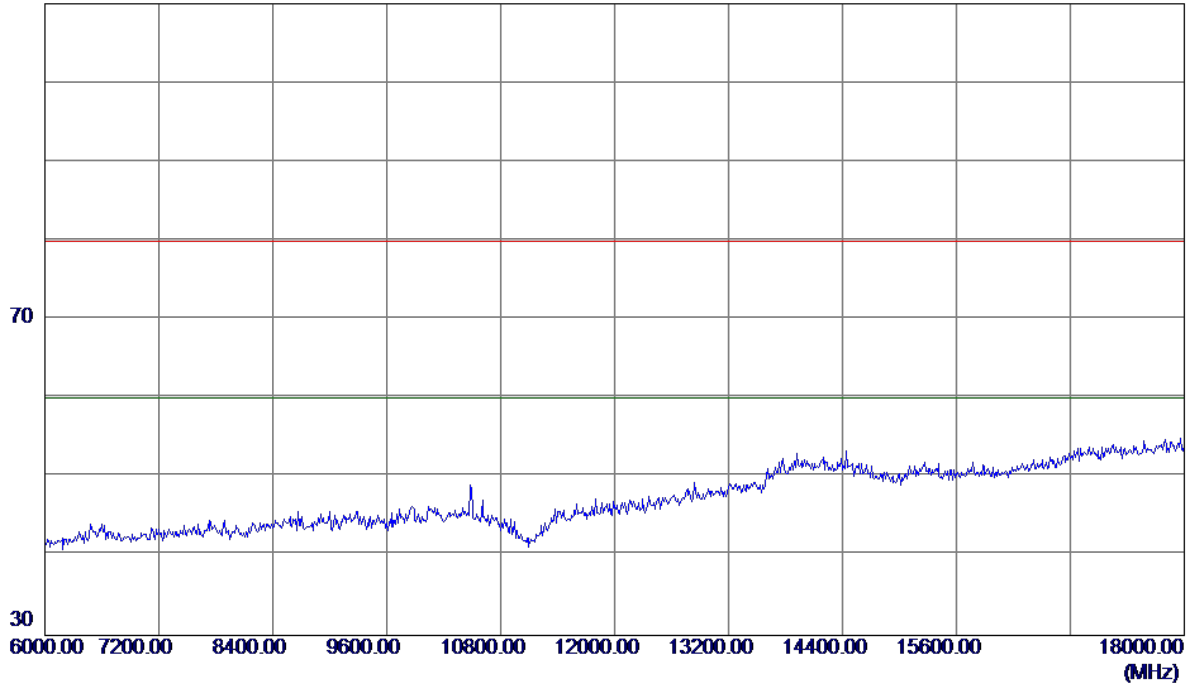


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

110 dBuV/m

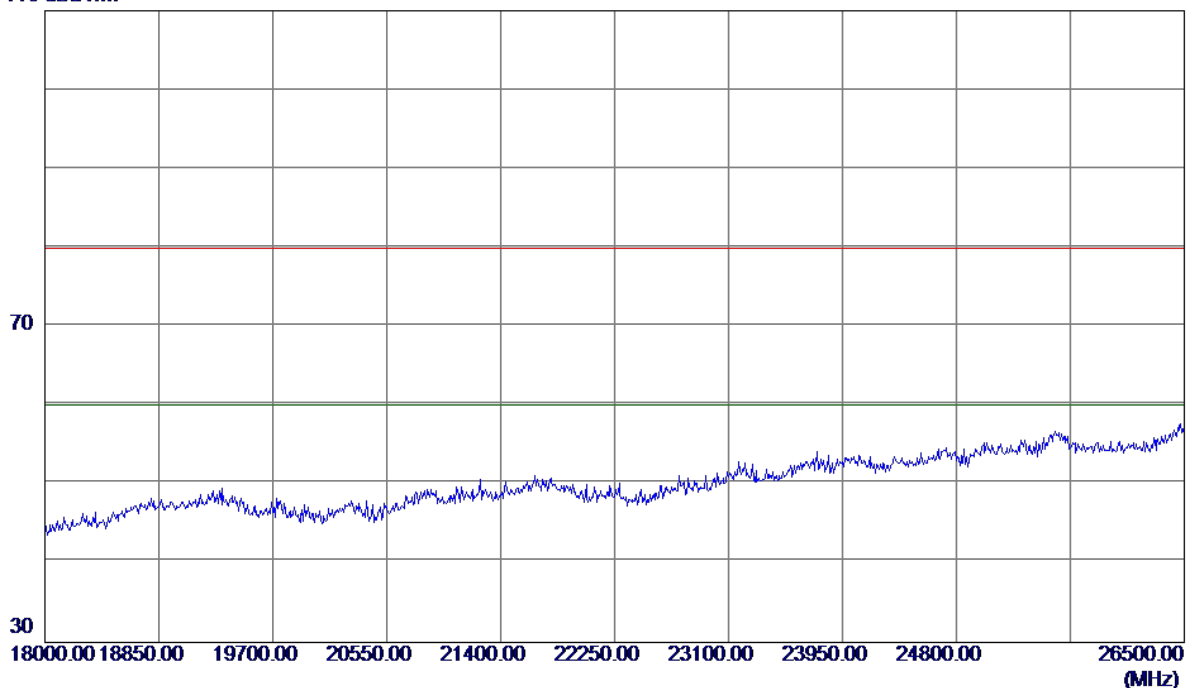


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

110 dBuV/m

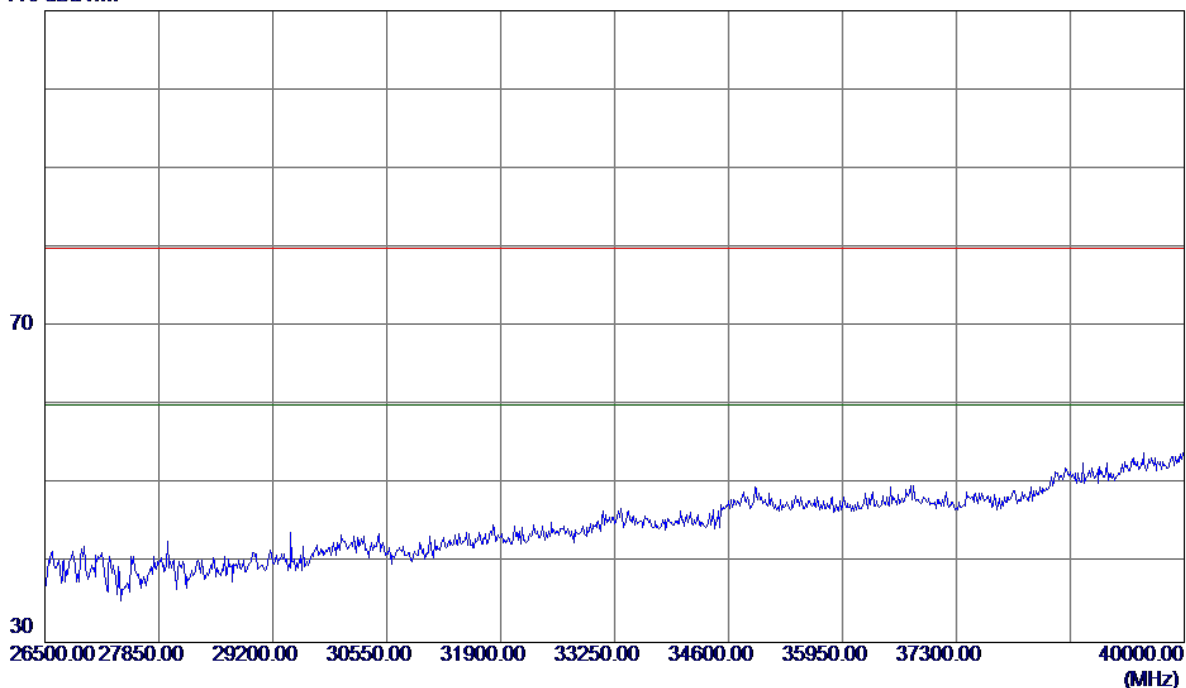


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

140 dBuV/m

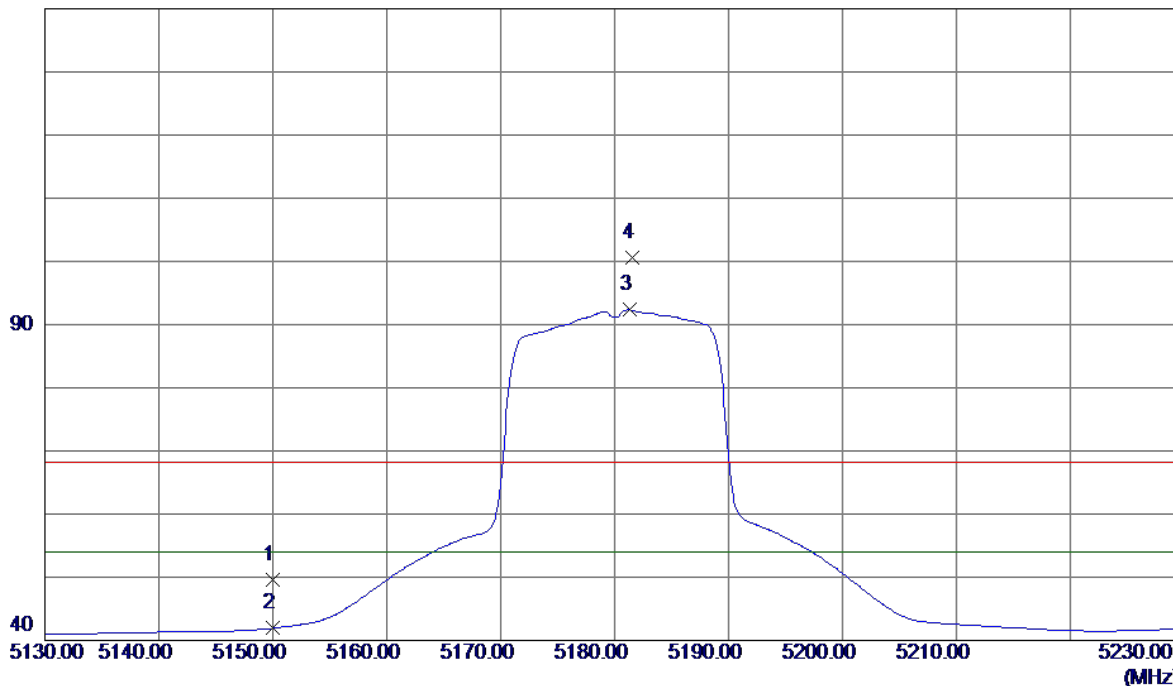


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.01	40.62	49.63	68.30	-18.67	Peak	
2	5150.0000	1.31	40.62	41.93	54.00	-12.07	AVG	
3 *	5181.3000	51.60	40.73	92.33	54.00	38.33	AVG	No Limit
4	5181.6000	59.96	40.73	100.69	68.30	32.39	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

110 dBuV/m

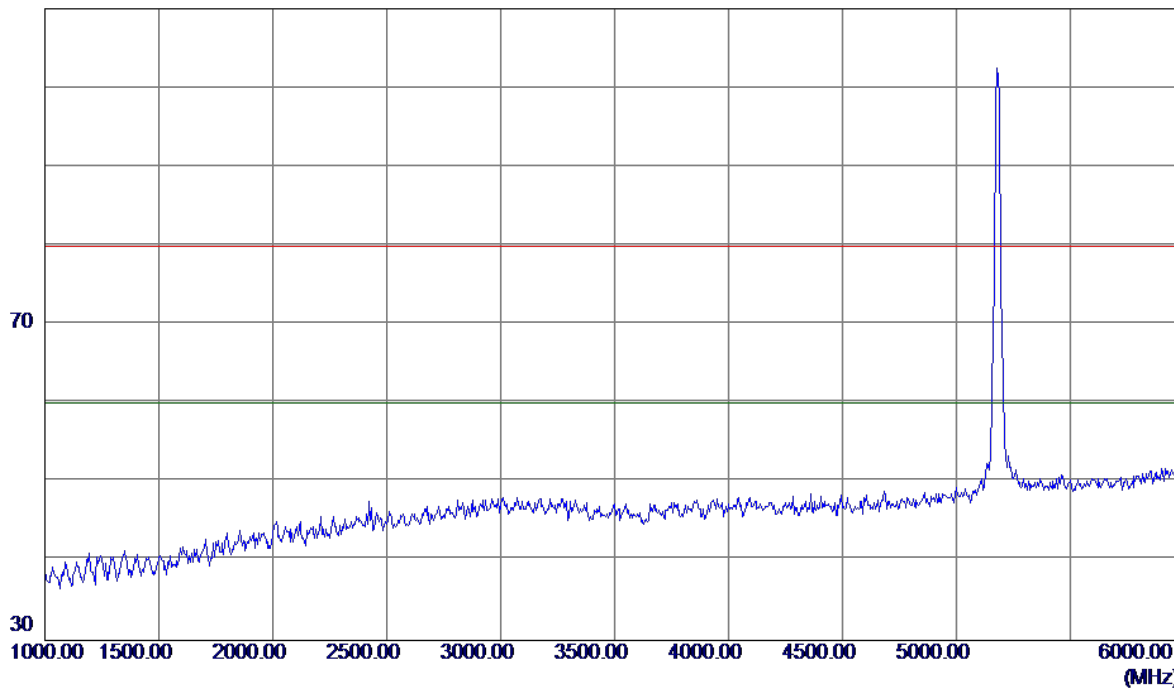


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

110 dBuV/m

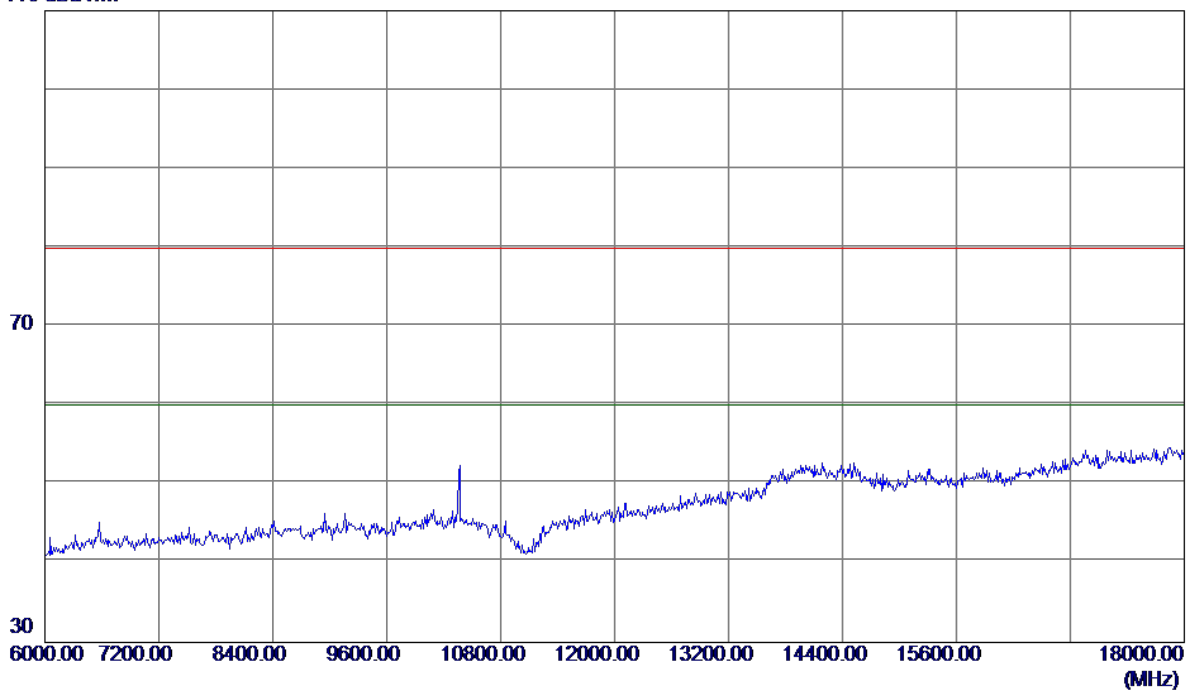


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

110 dBuV/m

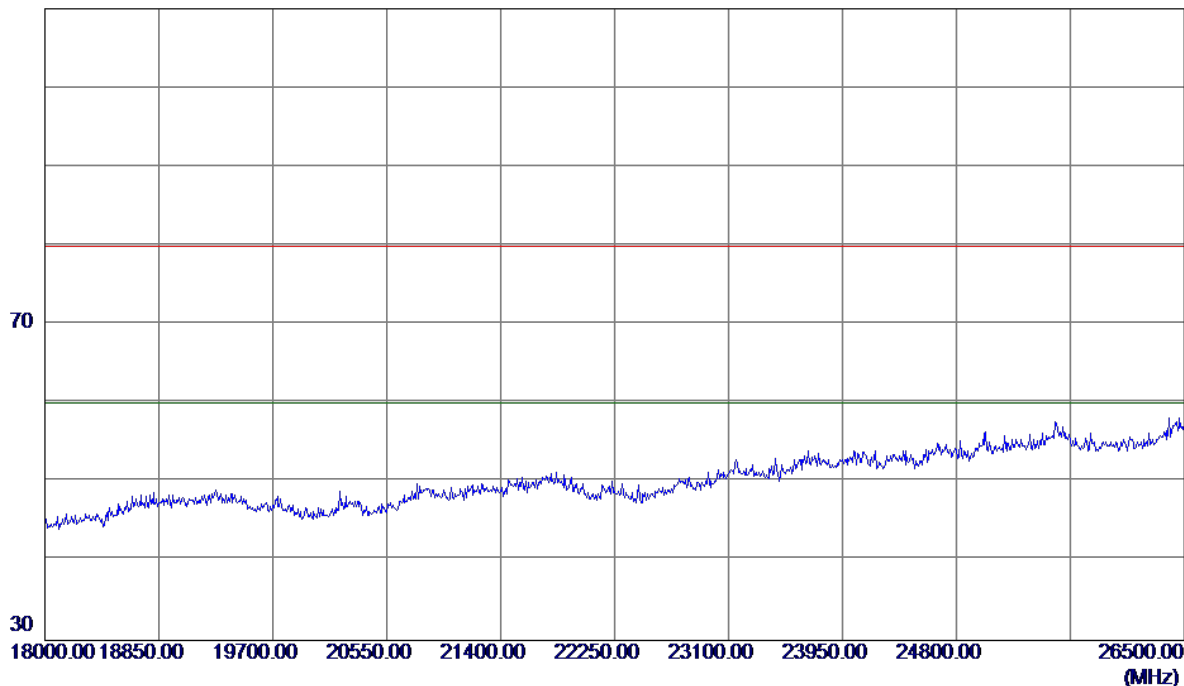


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical


110 dBuV/m

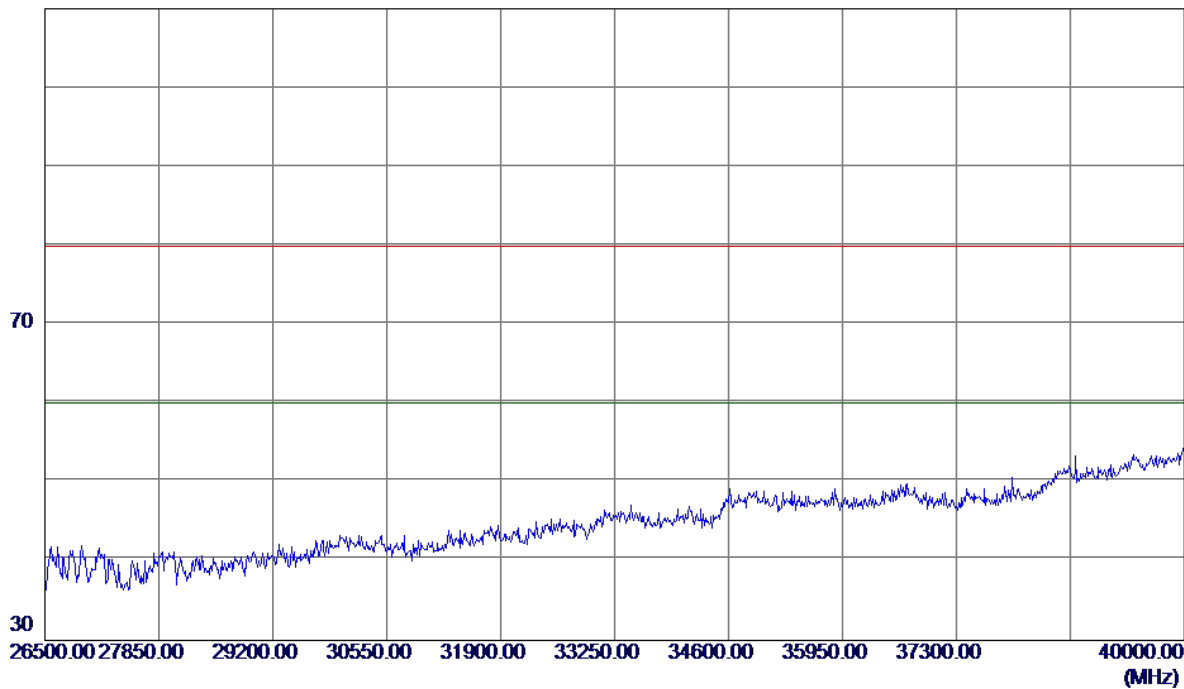

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

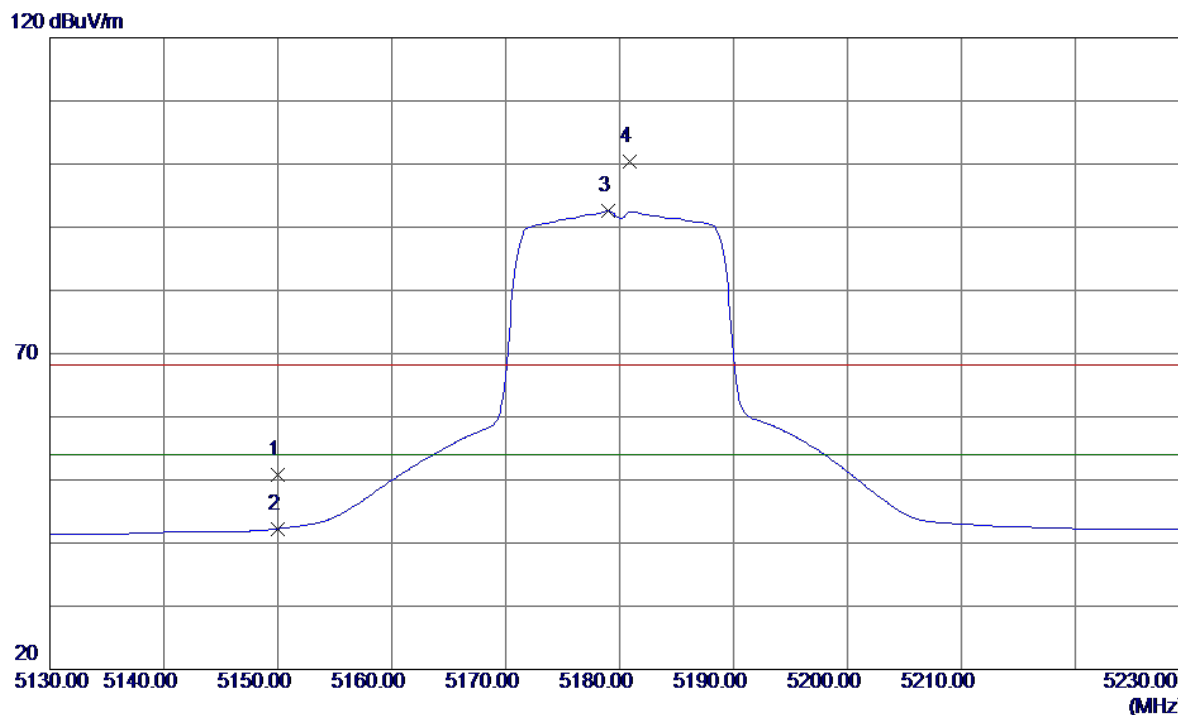


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	10.23	40.62	50.85	68.30	-17.45	Peak	
2	5150.0000	1.65	40.62	42.27	54.00	-11.73	AVG	
3 *	5179.0000	51.81	40.72	92.53	54.00	38.53	AVG	No Limit
4	5180.9000	59.71	40.73	100.44	68.30	32.14	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

110 dBuV/m

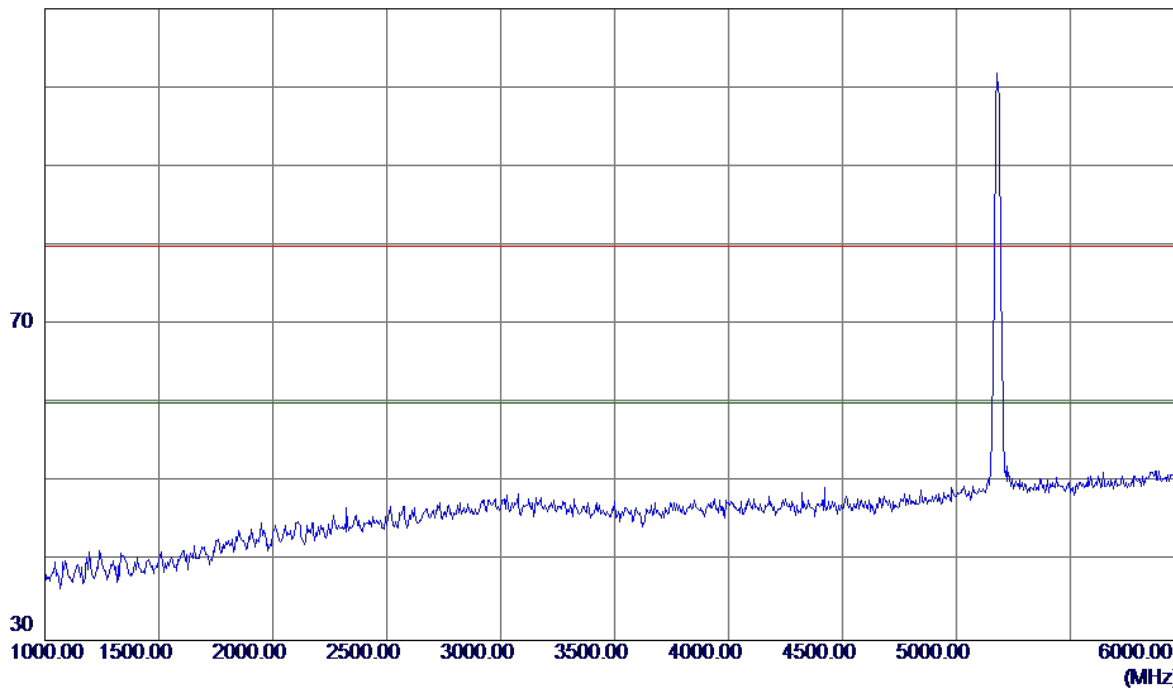


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

110 dBuV/m

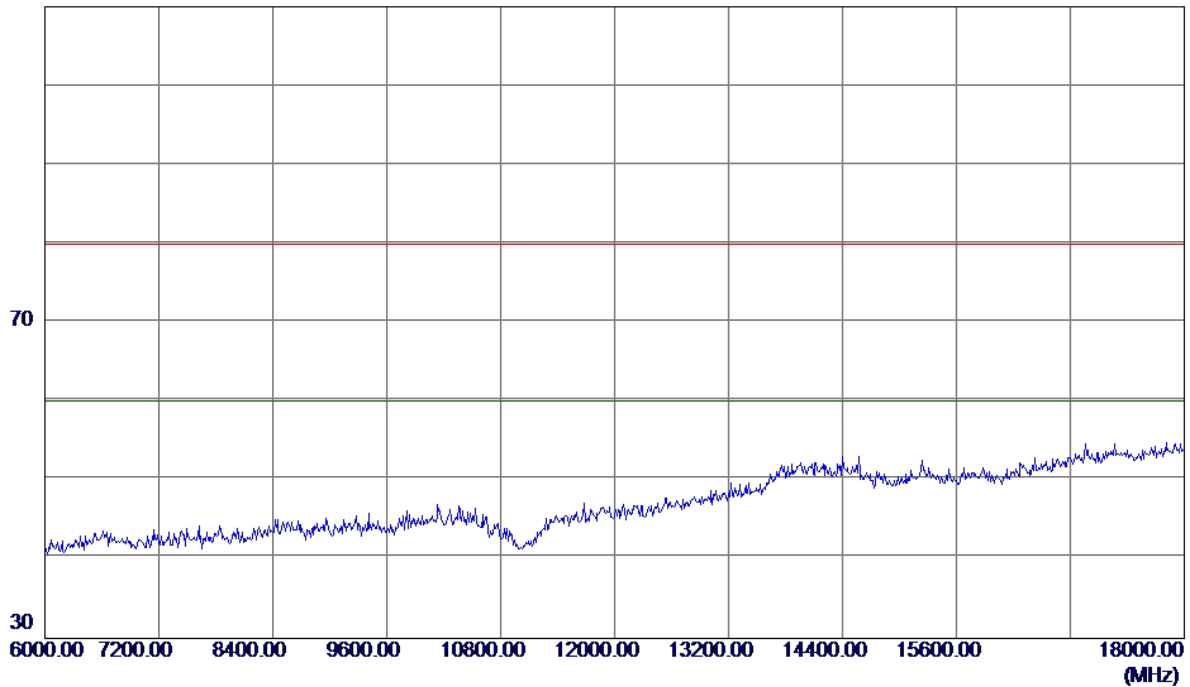


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

110 dBuV/m

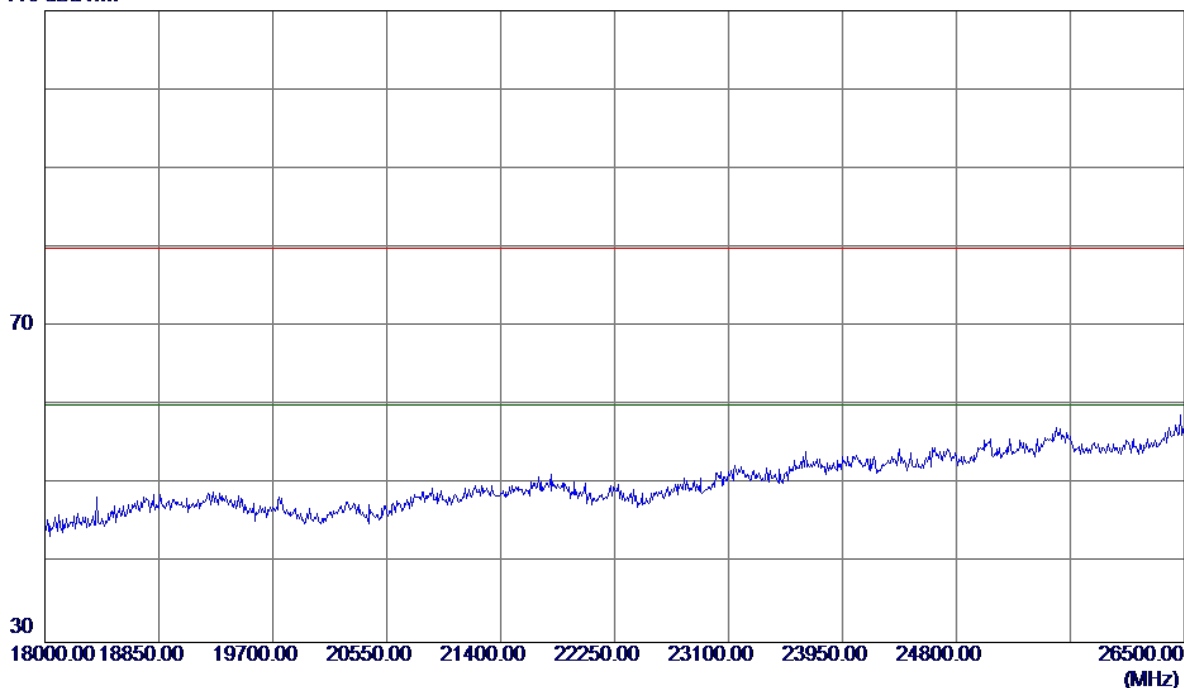


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal


110 dBuV/m

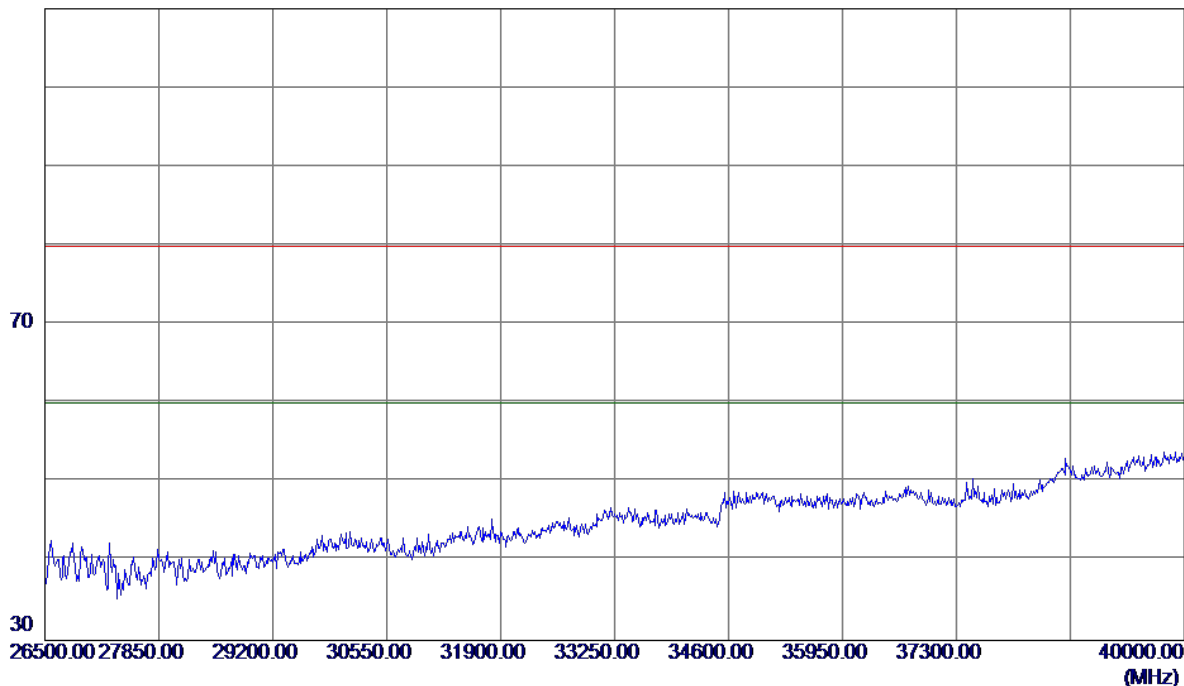

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

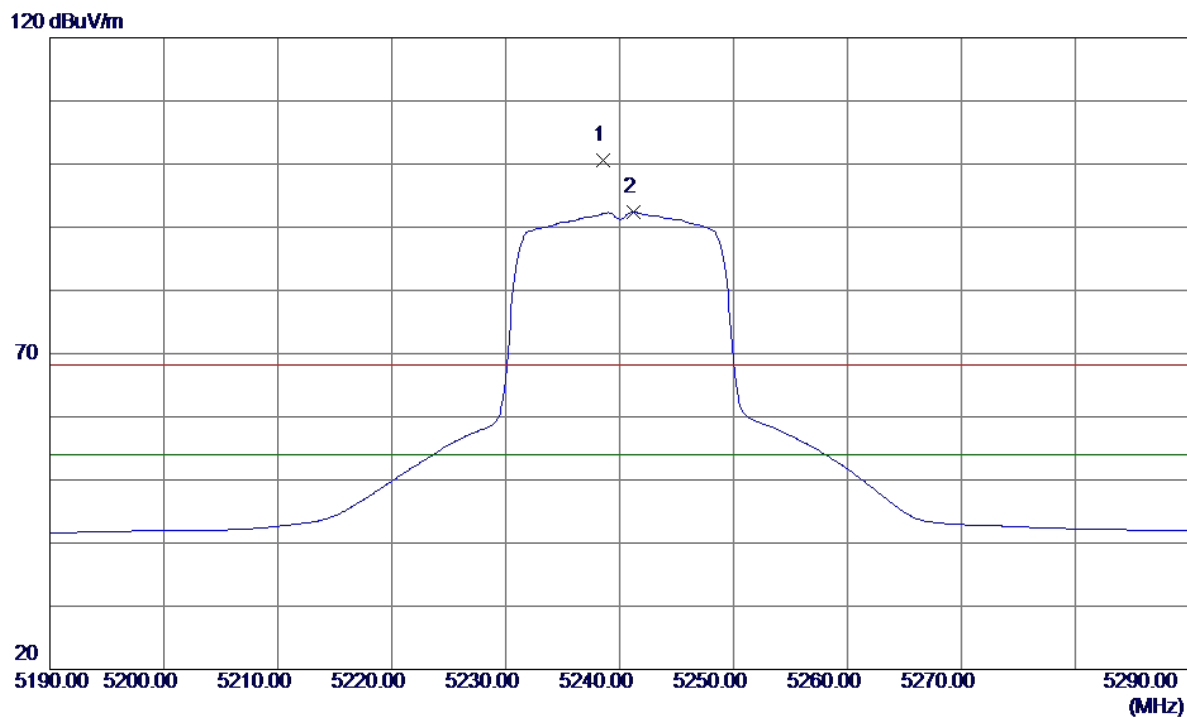


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5238.6000	59.61	40.92	100.53	68.30	32.23	Peak	No Limit
2 *	5241.2000	51.46	40.93	92.39	54.00	38.39	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

110 dBuV/m

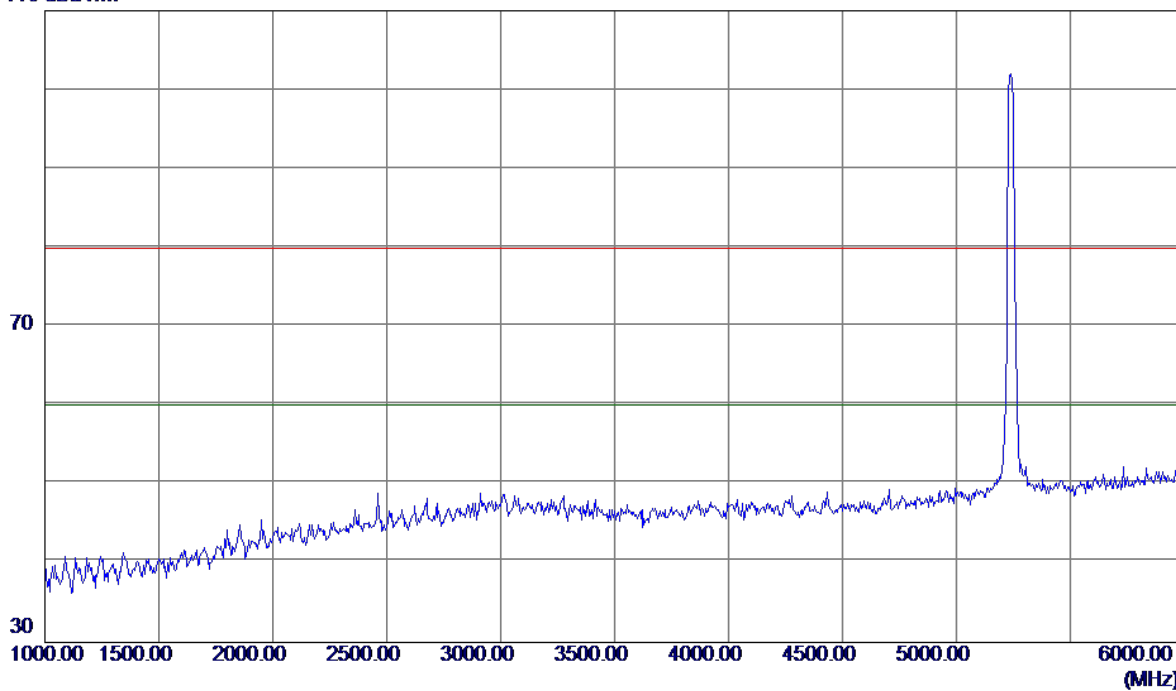


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

110 dBuV/m

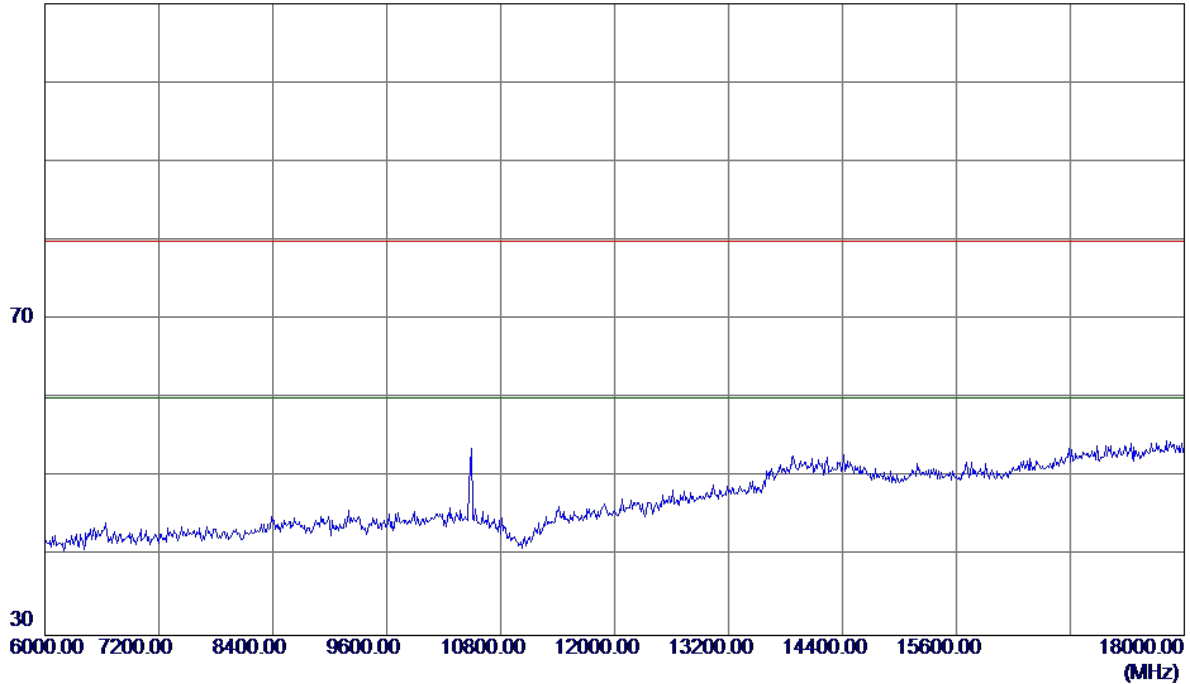


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

110 dBuV/m

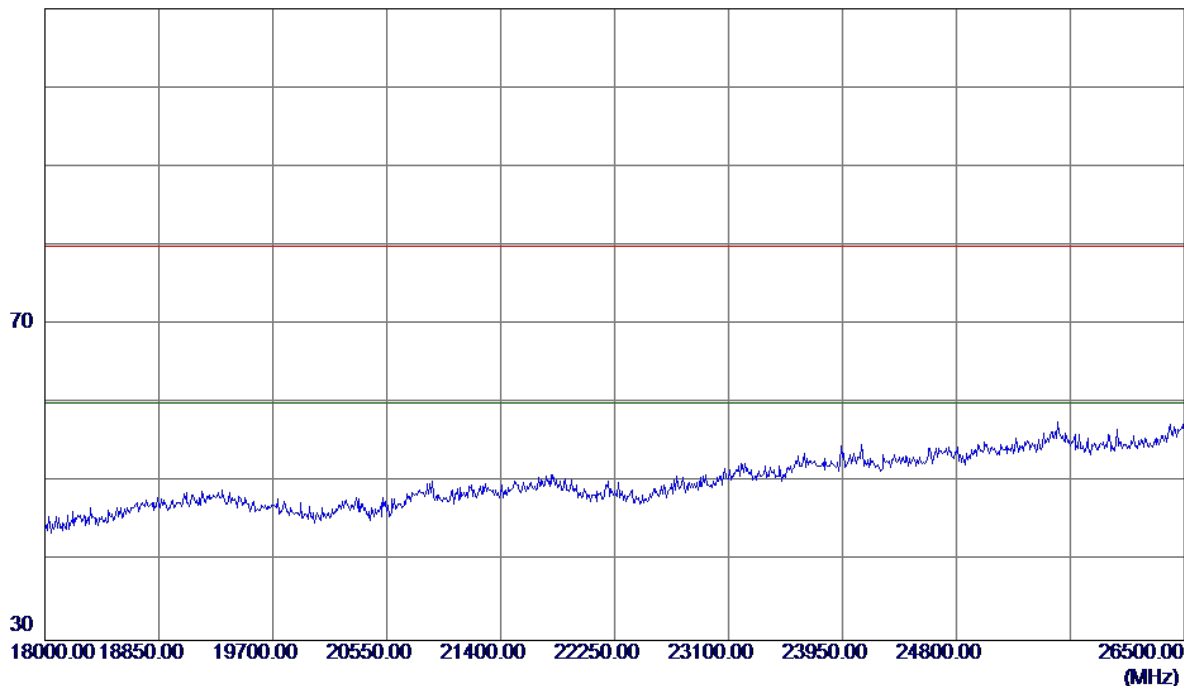


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical


110 dBuV/m

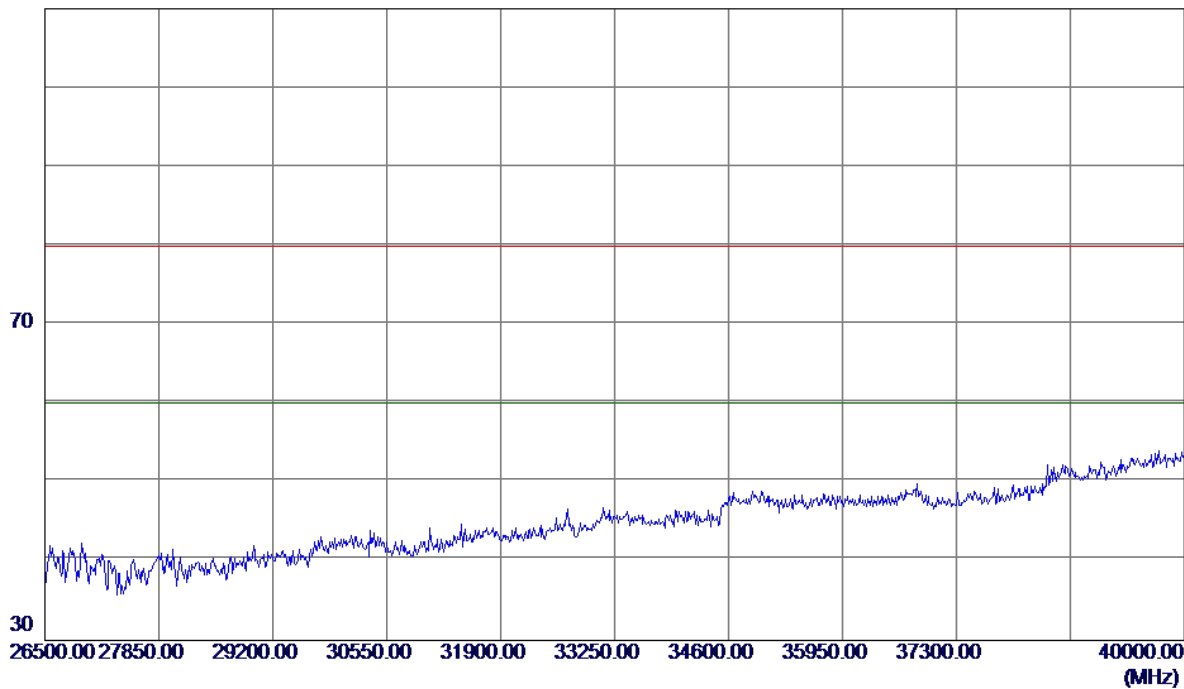

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

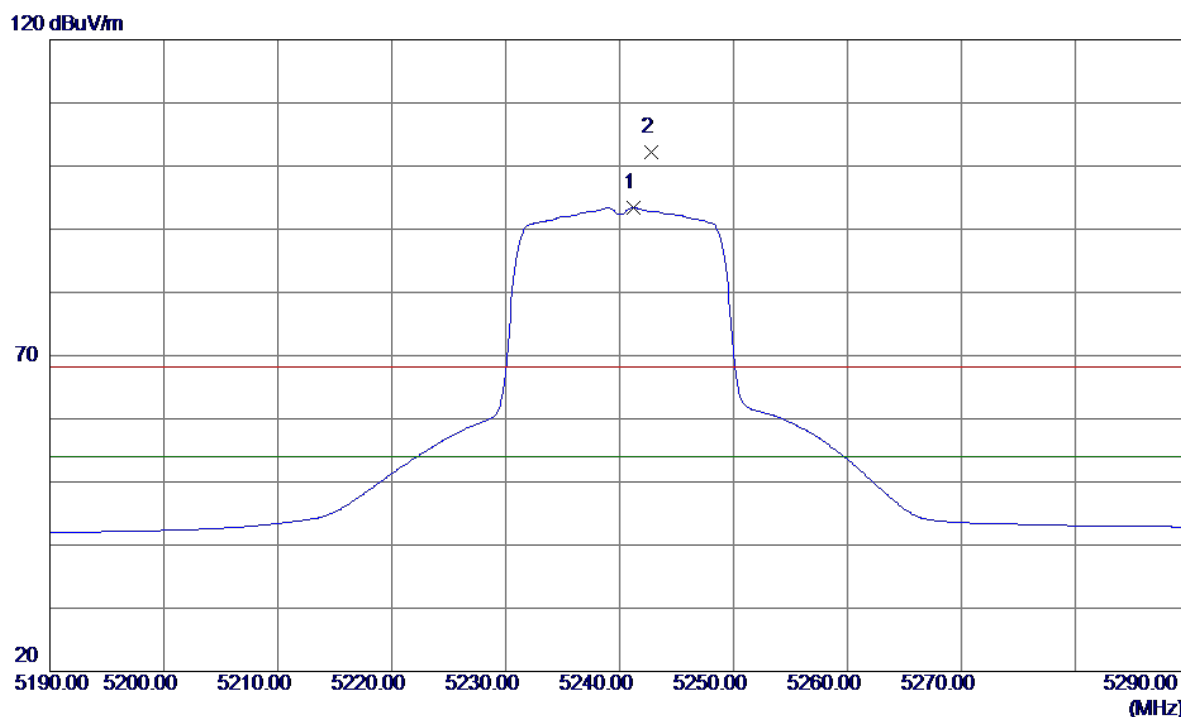

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5241.2000	52.45	40.93	93.38	54.00	39.38	AVG	No Limit
2	5242.8000	61.27	40.93	102.20	68.30	33.90	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

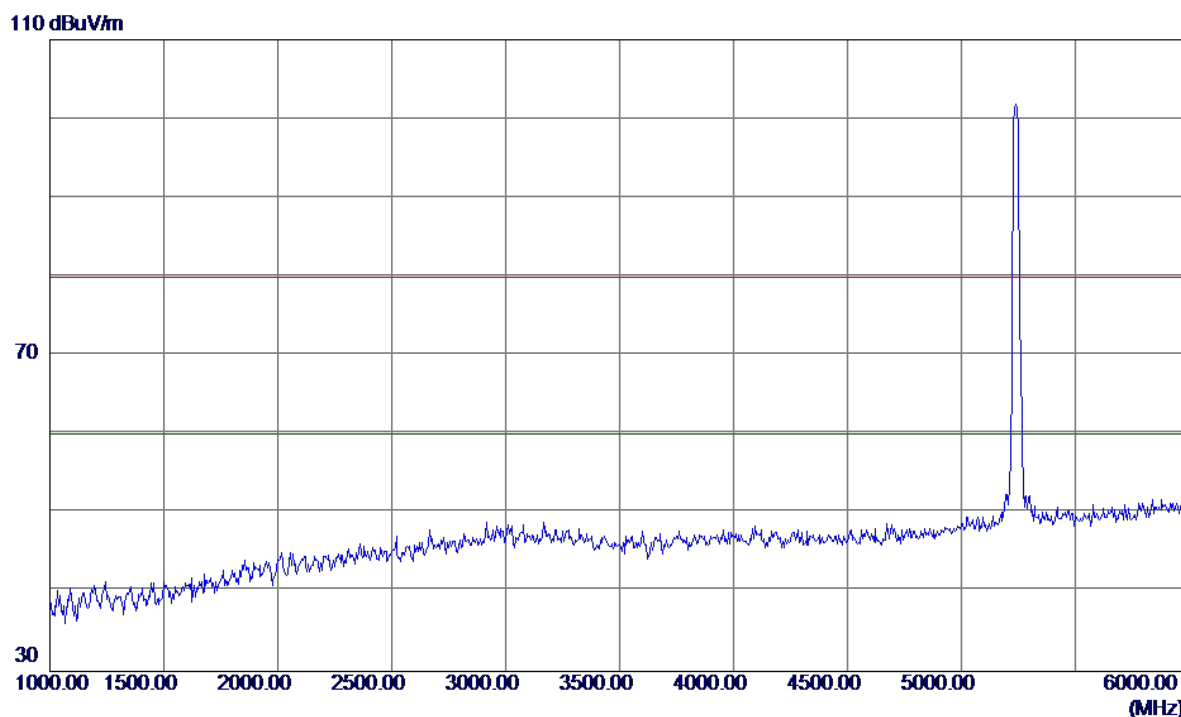


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

110 dBuV/m

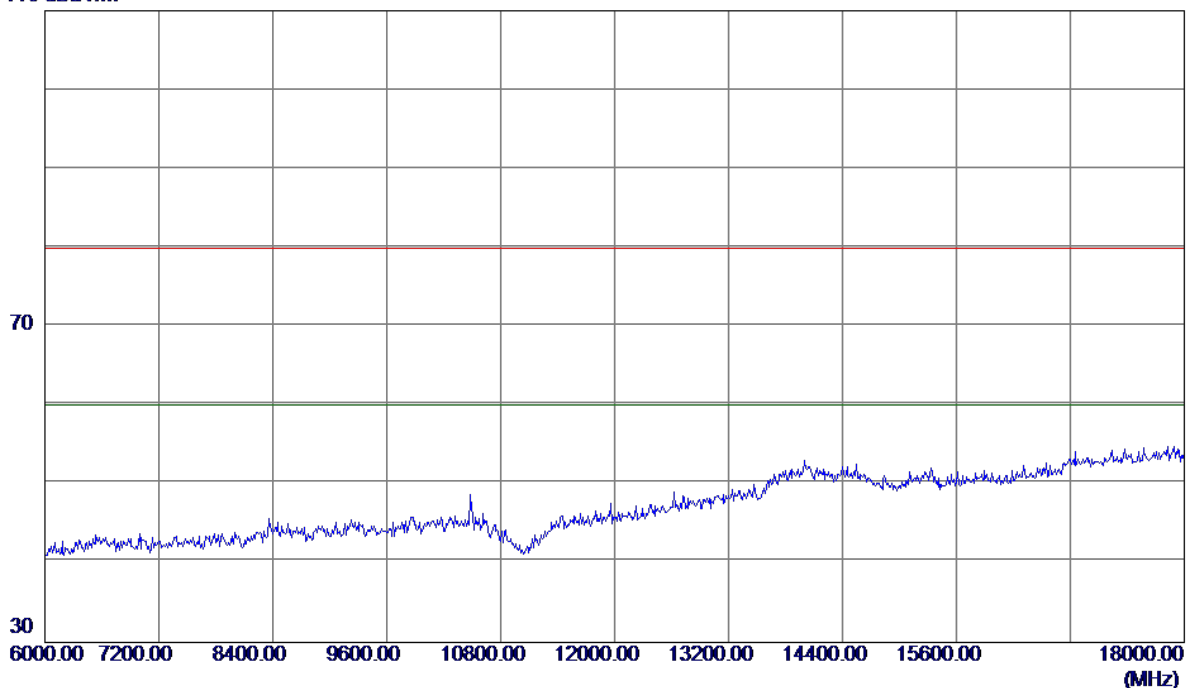


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

110 dBuV/m

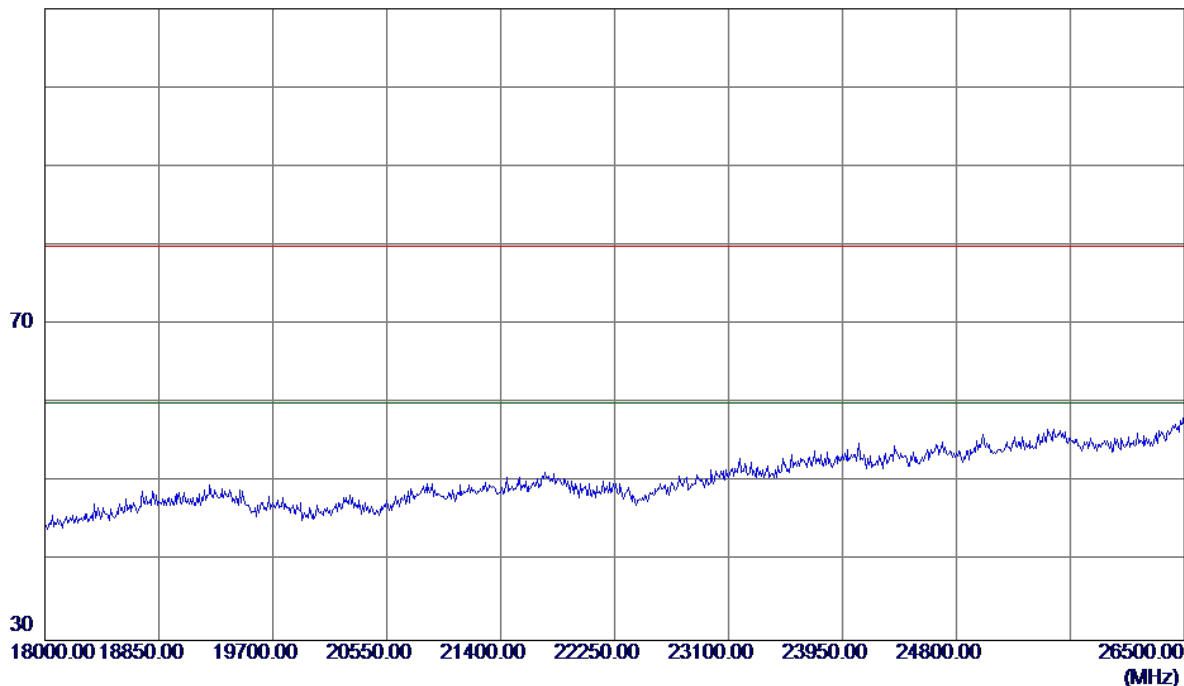


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

110 dBuV/m

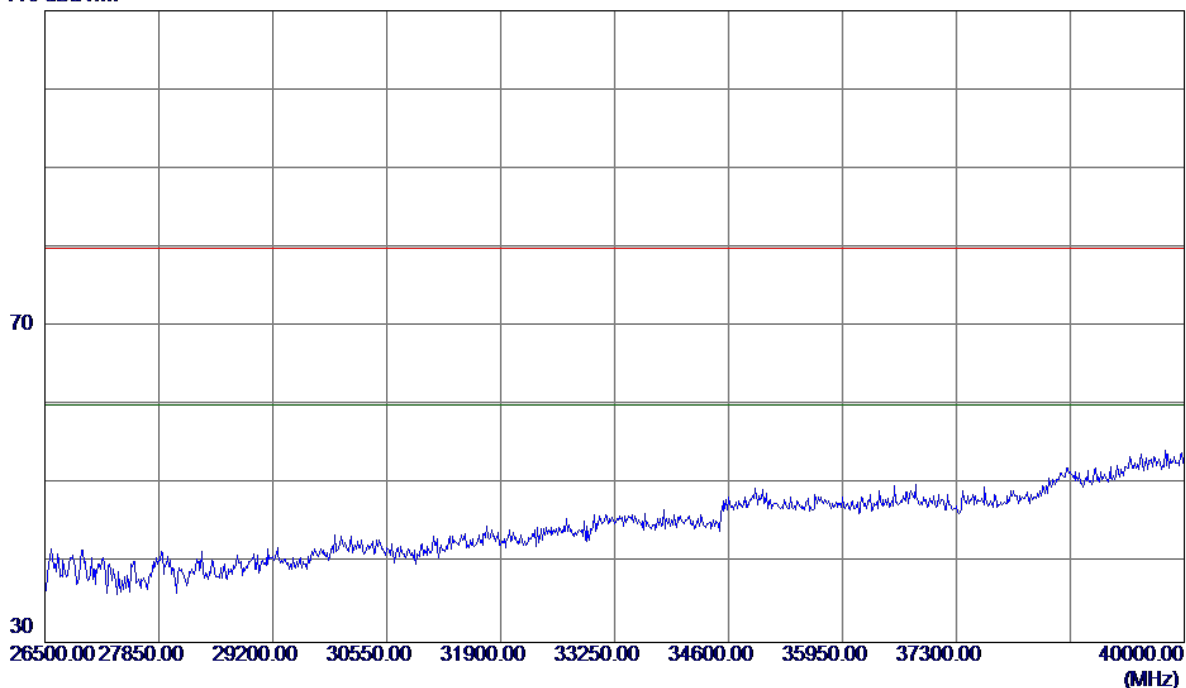


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

125 dBuV/m

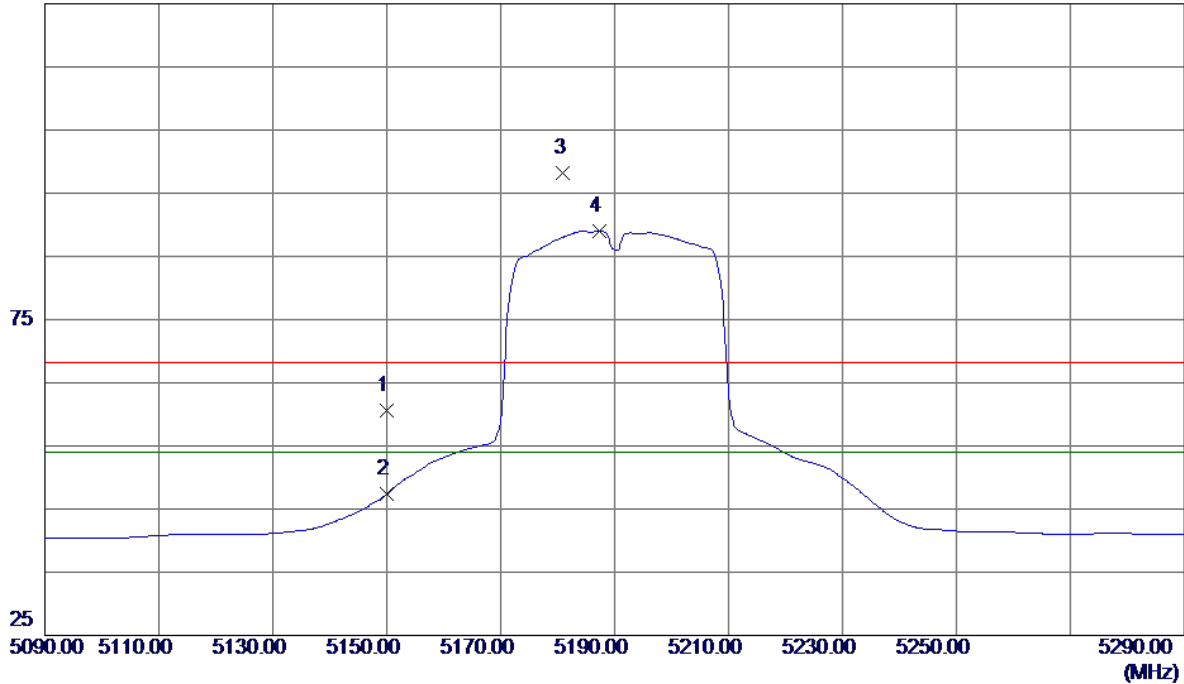


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	20.07	40.62	60.69	68.30	-7.61	Peak	
2	5150.0000	6.73	40.62	47.35	54.00	-6.65	AVG	
3	5181.0000	57.44	40.73	98.17	68.30	29.87	Peak	No Limit
4 *	5187.4000	48.25	40.75	89.00	54.00	35.00	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

110 dBuV/m

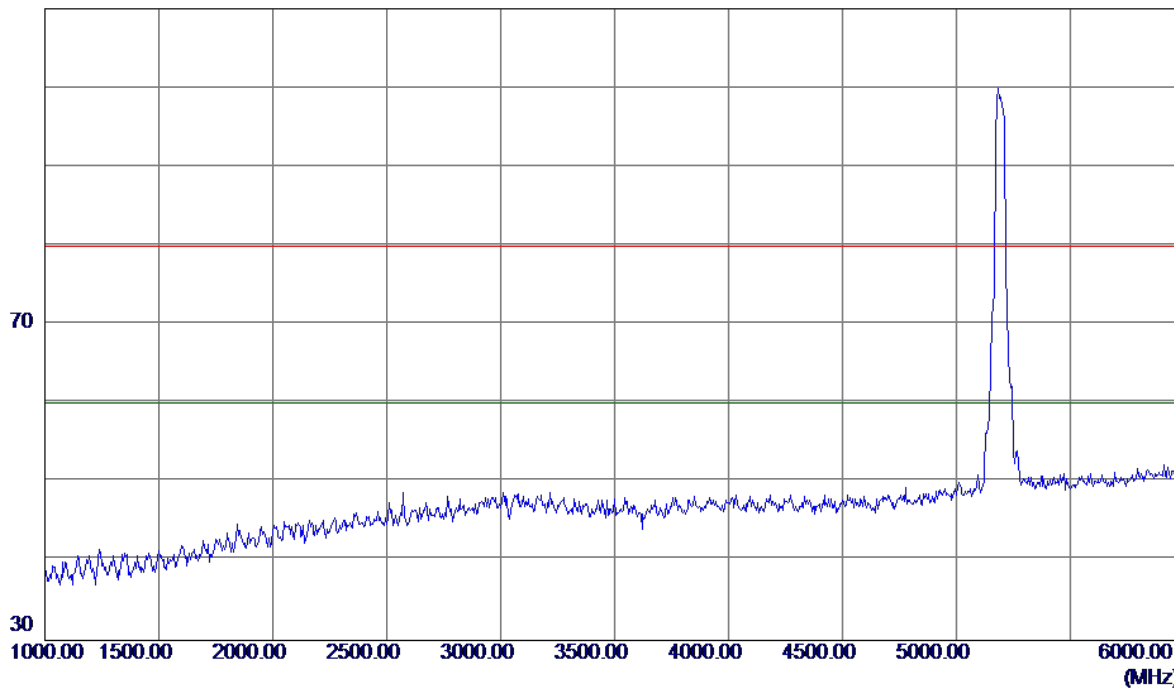


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

110 dBuV/m

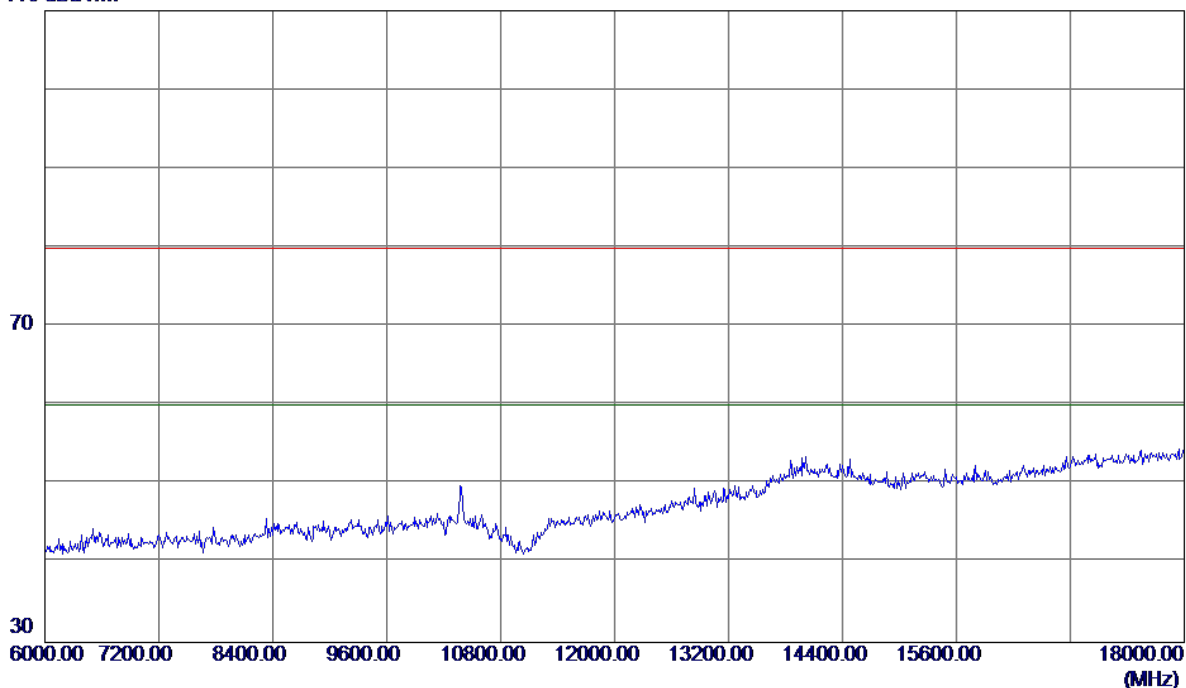


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

110 dBuV/m

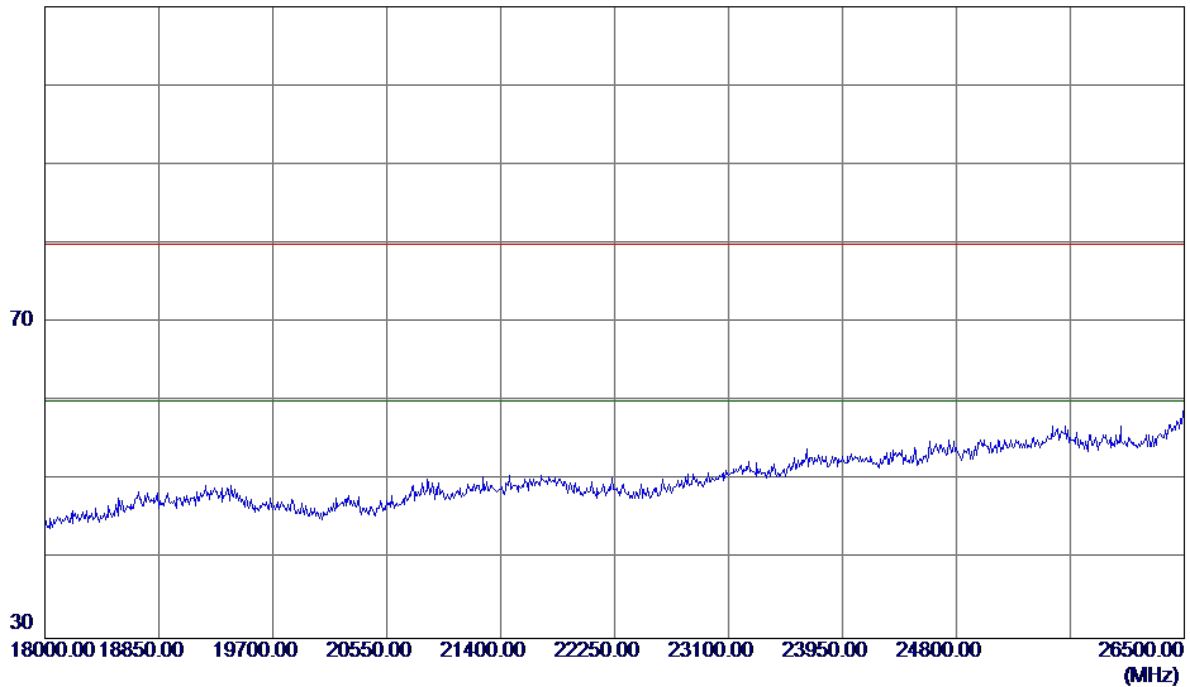


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

110 dBuV/m

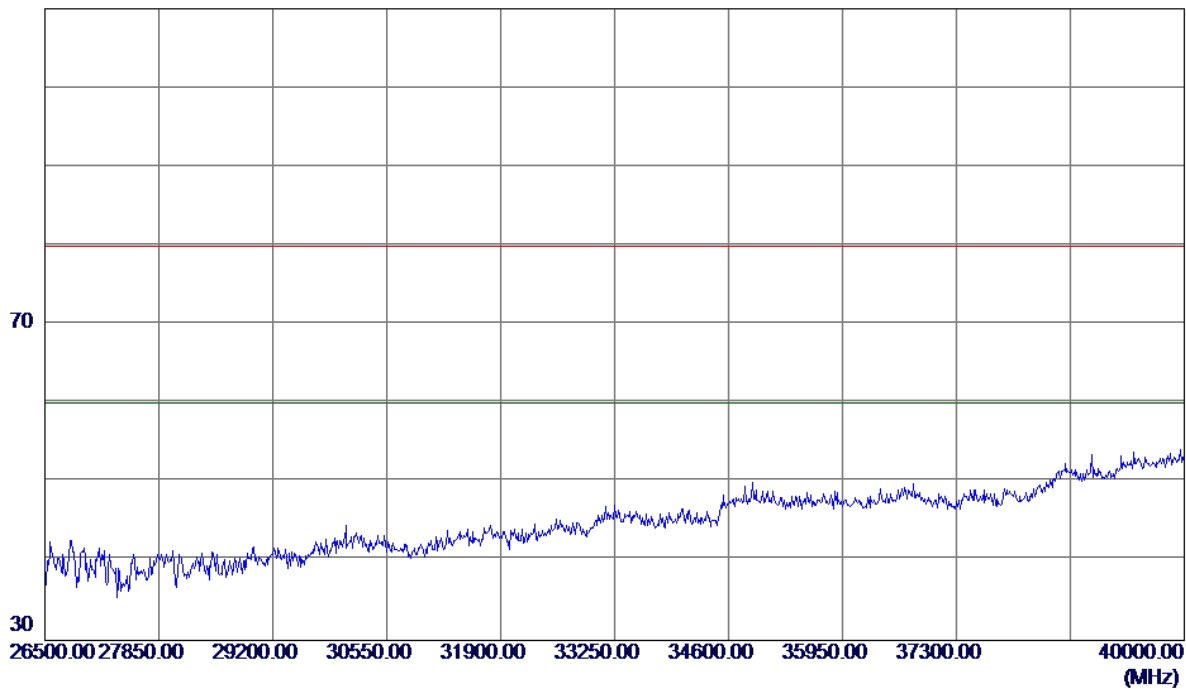


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

125 dBuV/m

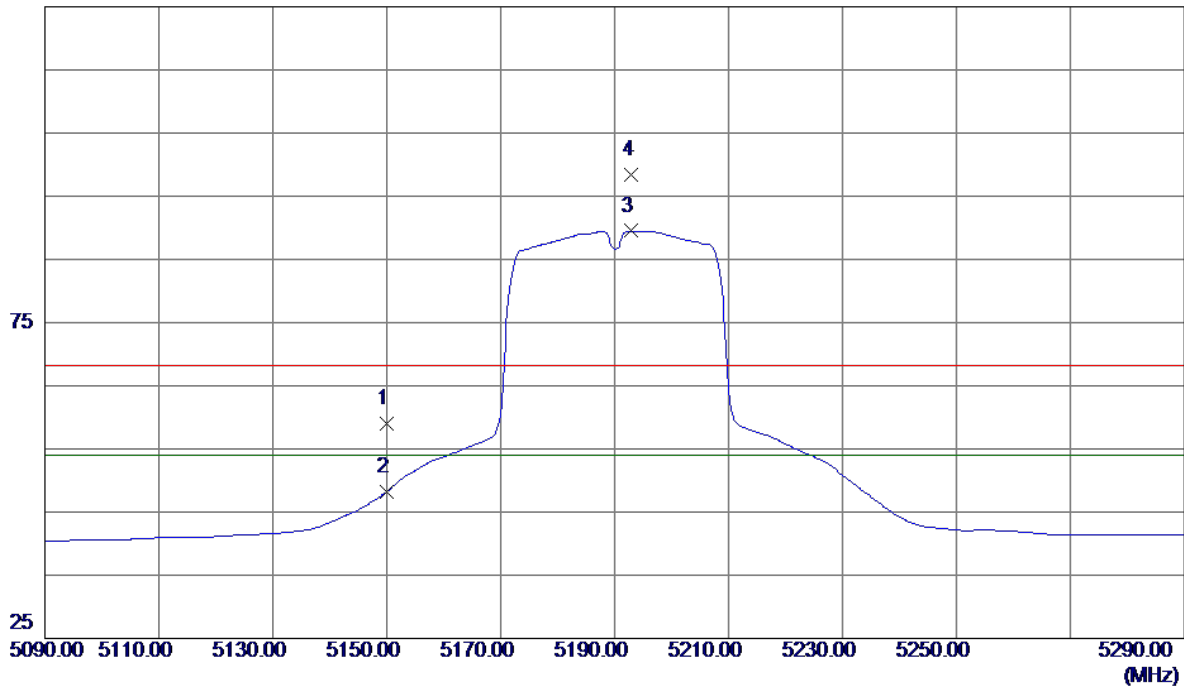


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	18.38	40.62	59.00	68.30	-9.30	Peak	
2	5150.0000	7.60	40.62	48.22	54.00	-5.78	AVG	
3 *	5192.8000	48.73	40.77	89.50	54.00	35.50	AVG	No Limit
4	5193.0000	57.70	40.77	98.47	68.30	30.17	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

110 dBuV/m

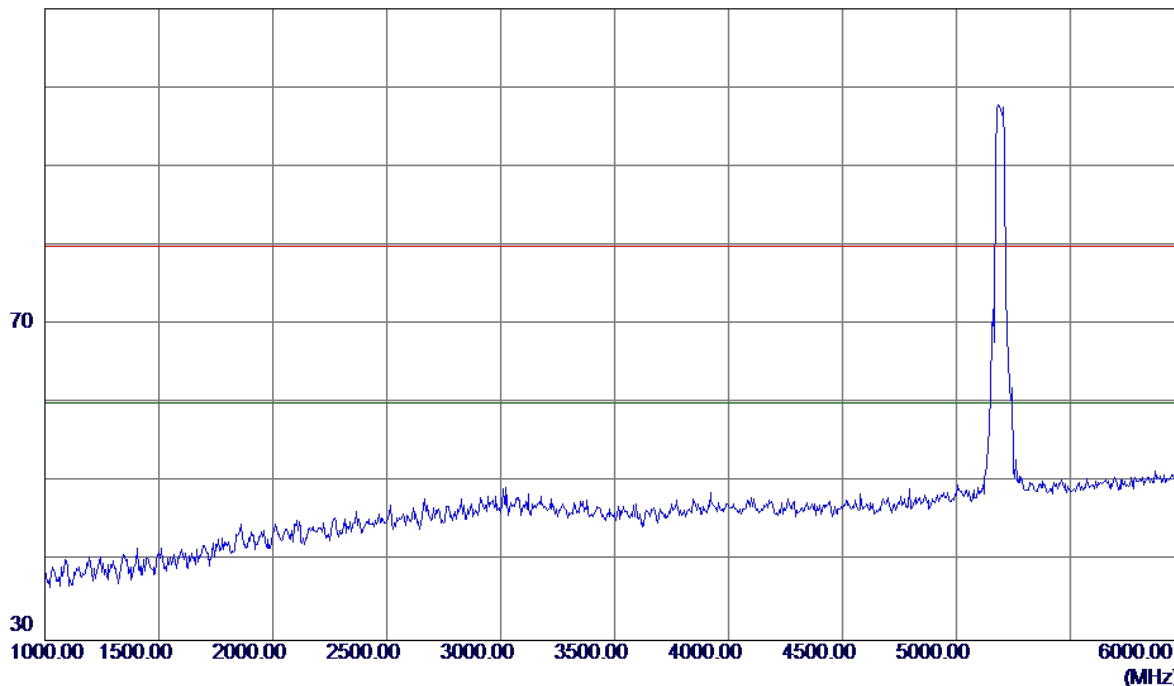


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

110 dBuV/m

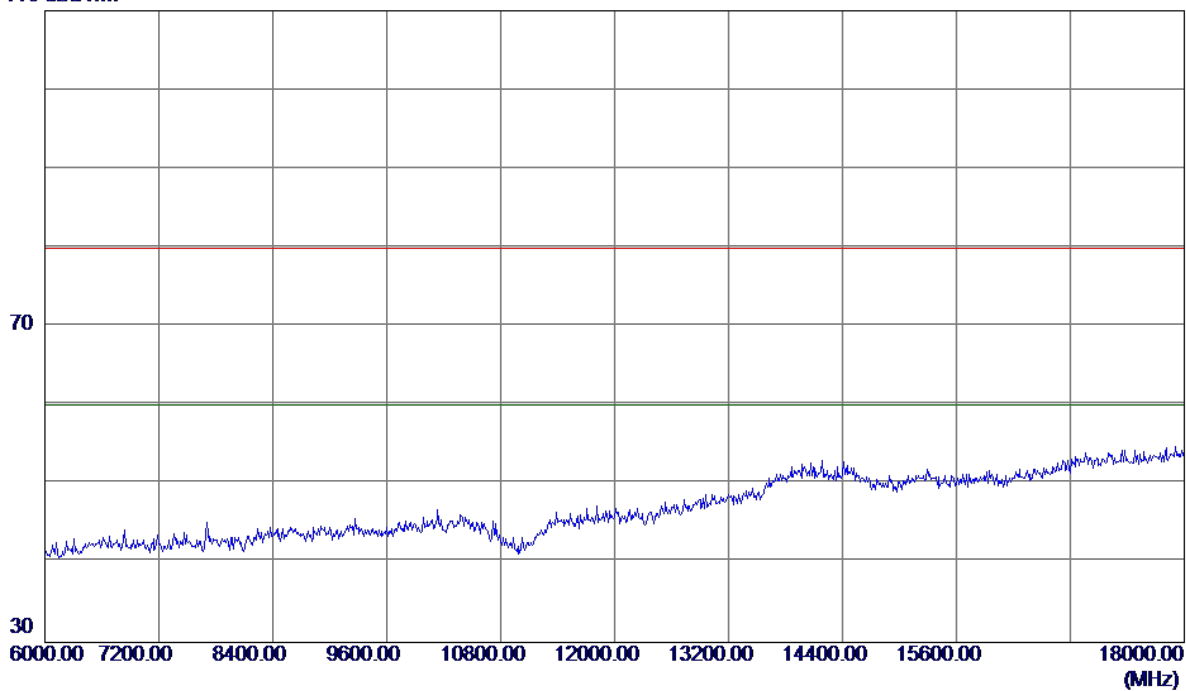


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

110 dBuV/m

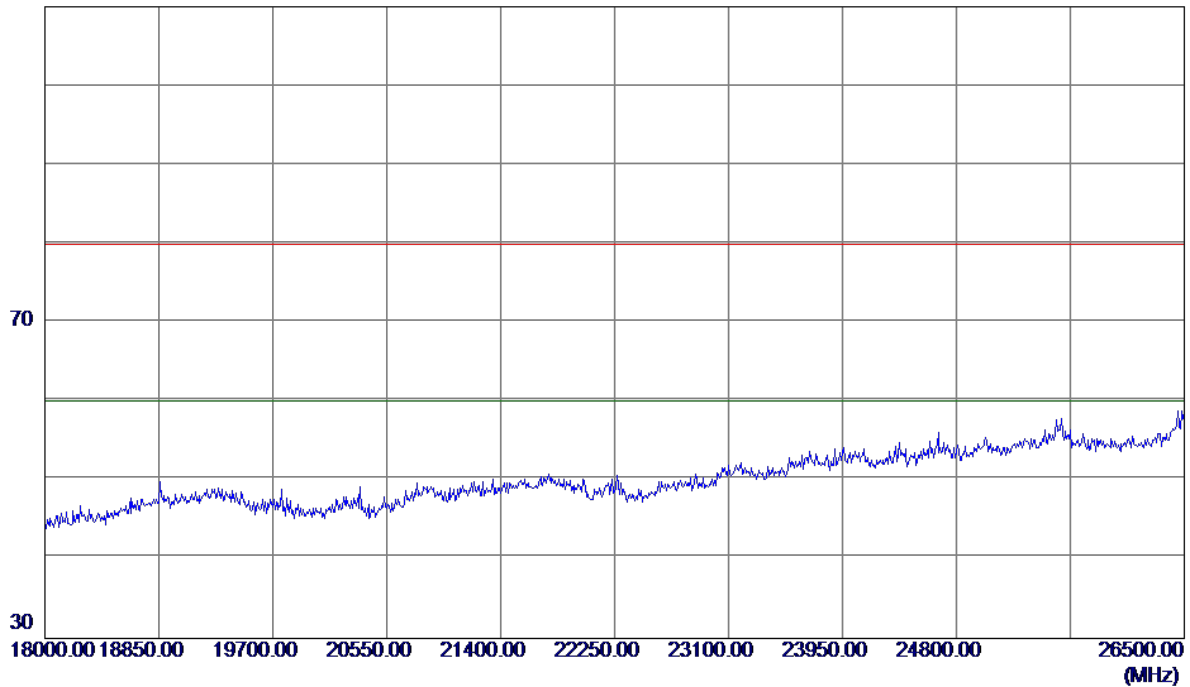


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

110 dBuV/m

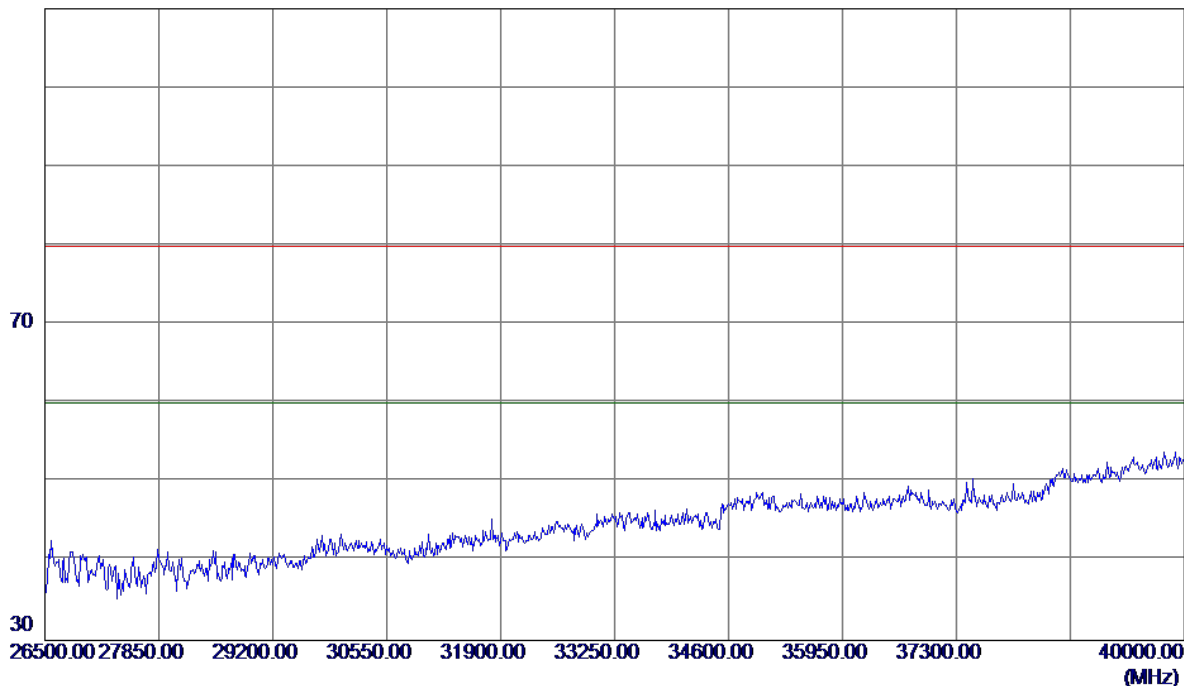


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

125 dBuV/m

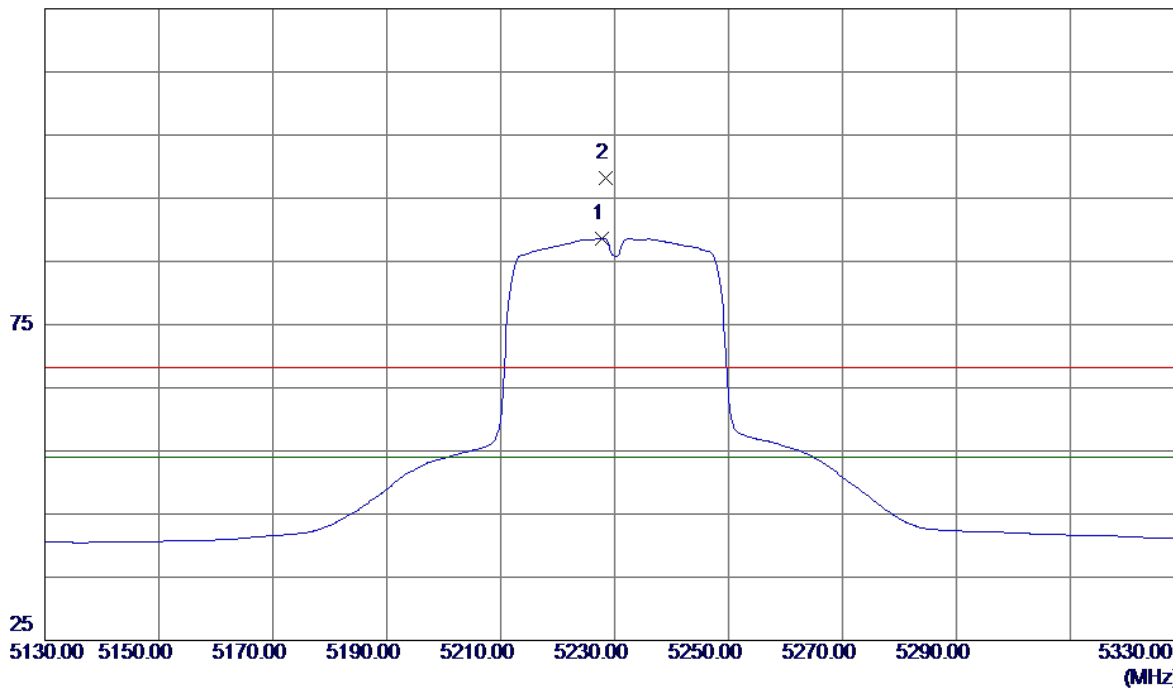


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5227.8000	47.81	40.88	88.69	54.00	34.69	AVG	No Limit
2	5228.4000	57.39	40.88	98.27	68.30	29.97	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

110 dBuV/m

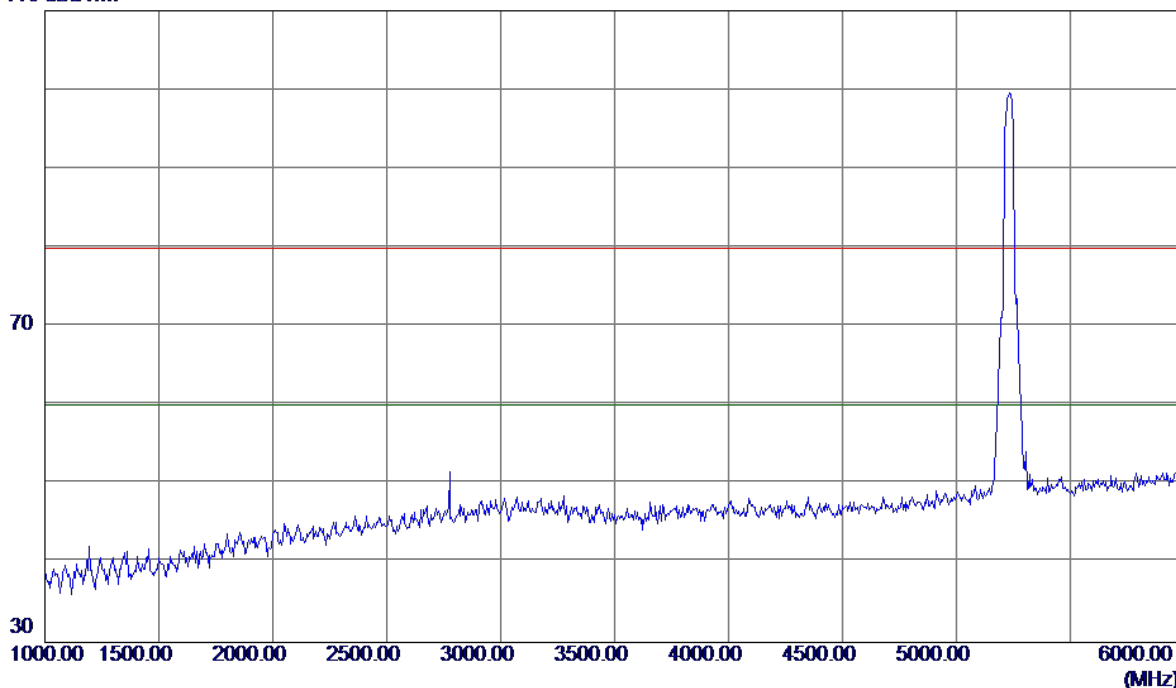


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

110 dBuV/m

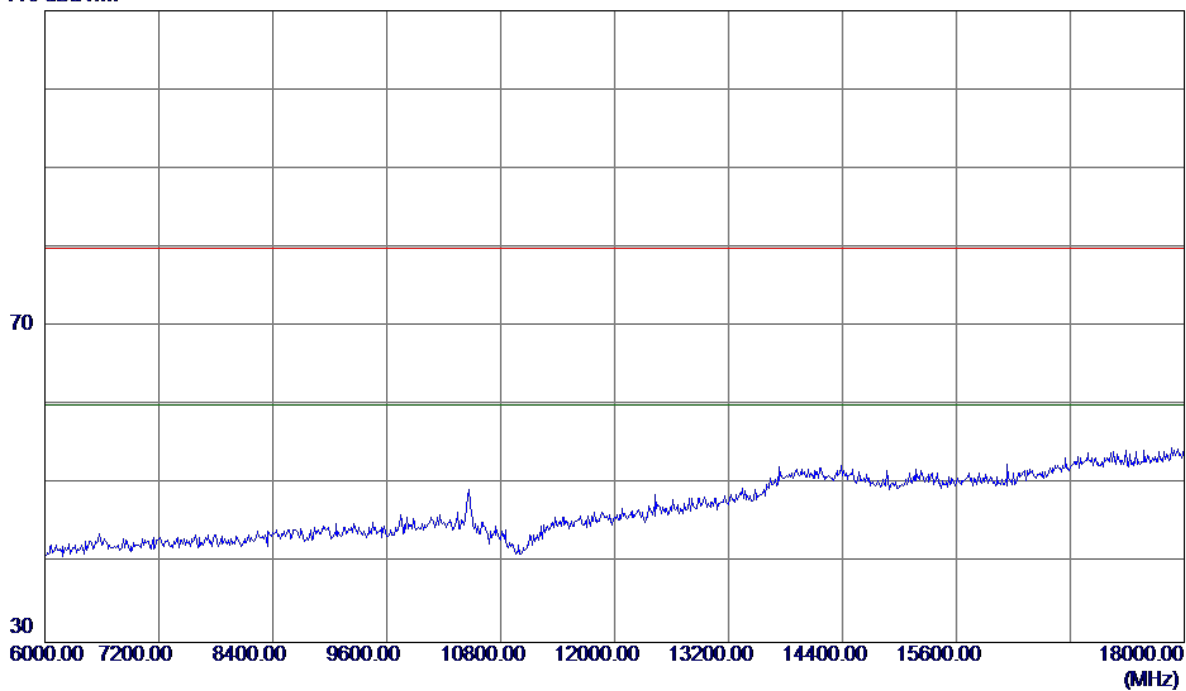


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

110 dBuV/m

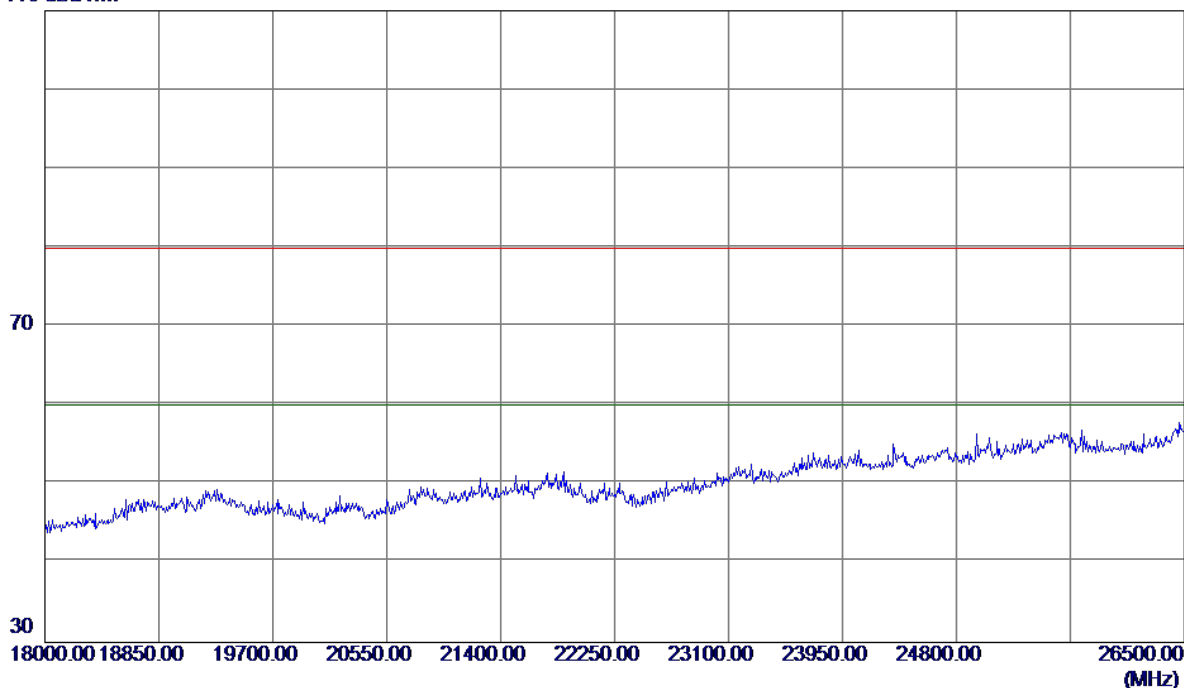


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

110 dBuV/m

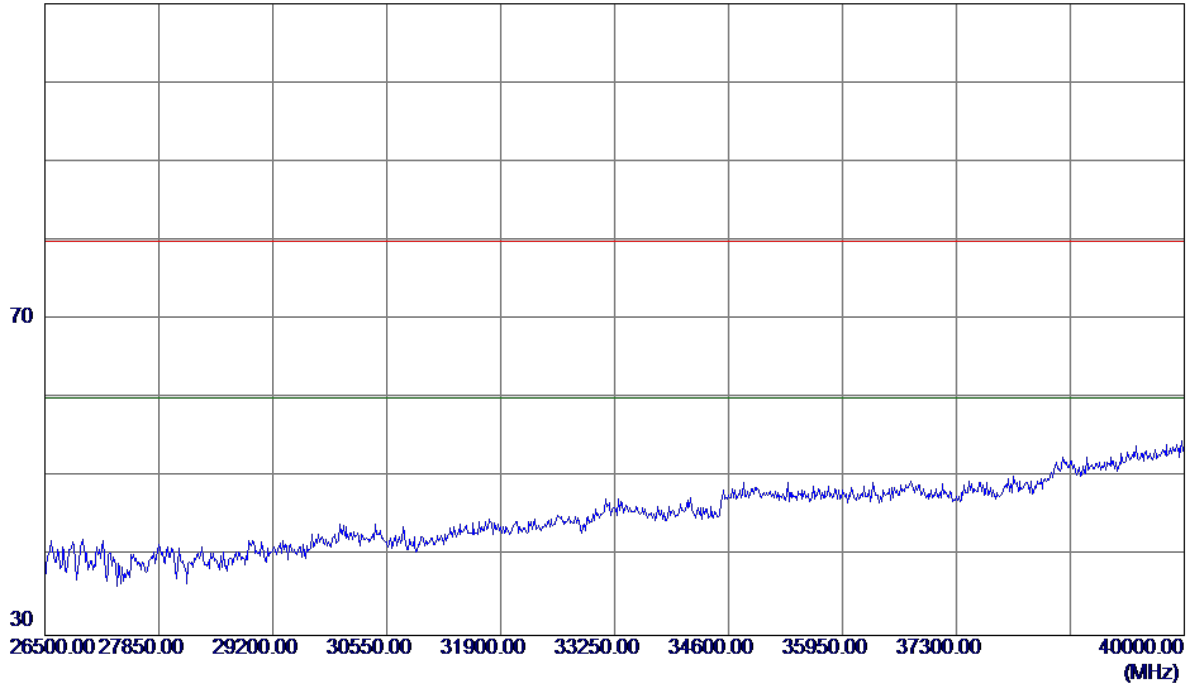


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

125 dBuV/m

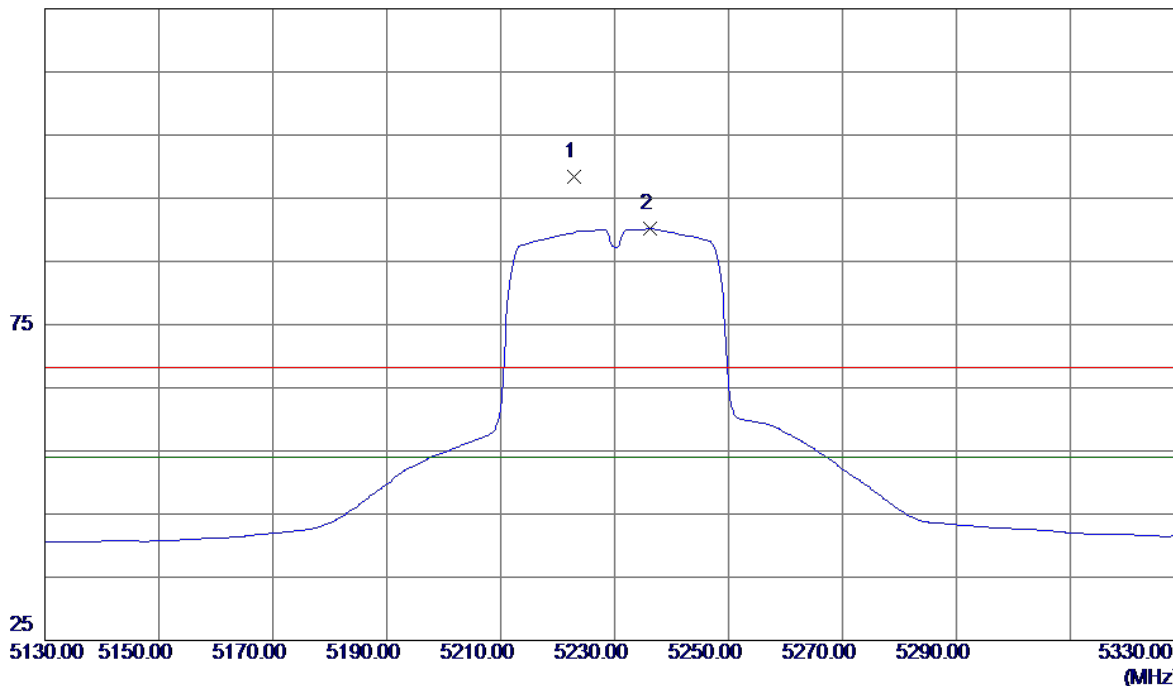


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5222.8000	57.51	40.87	98.38	68.30	30.08	Peak	No Limit
2 *	5236.2000	49.22	40.91	90.13	54.00	36.13	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

110 dBuV/m

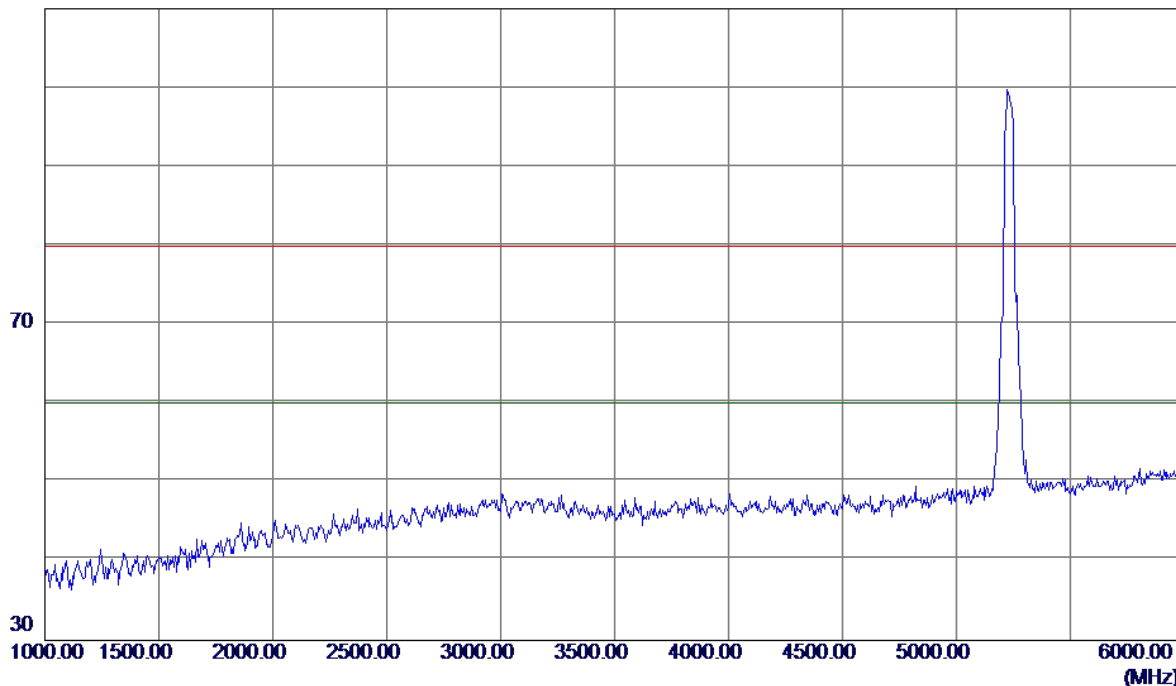


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

110 dBuV/m

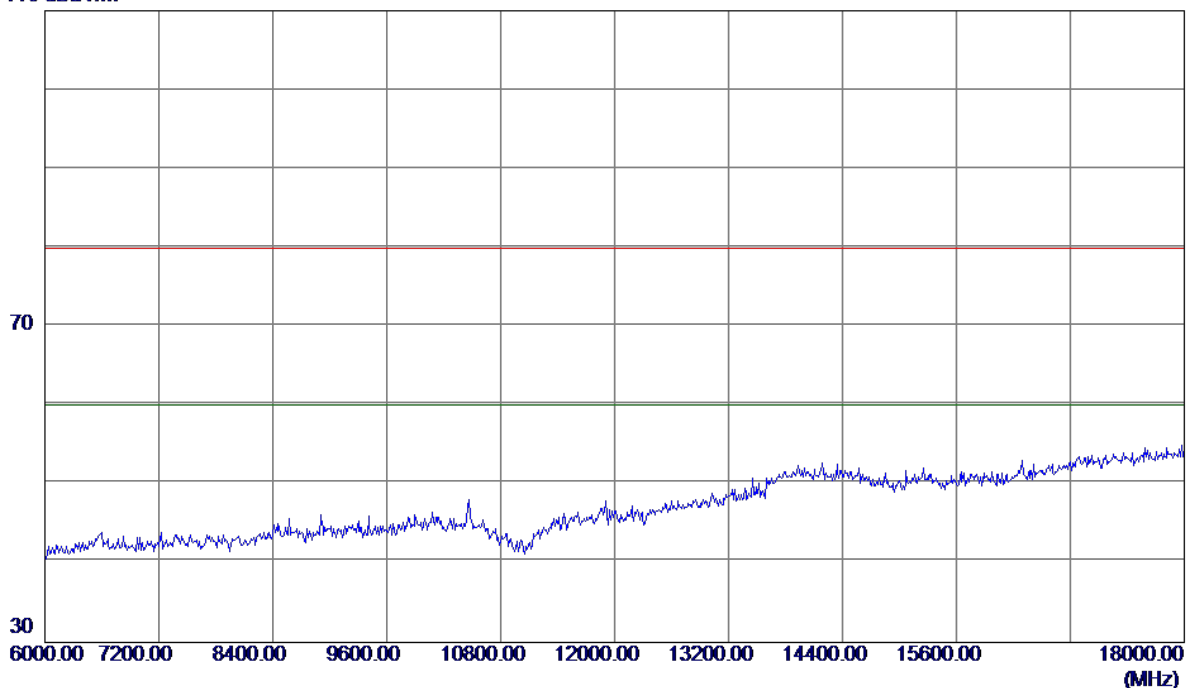


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal


110 dBuV/m

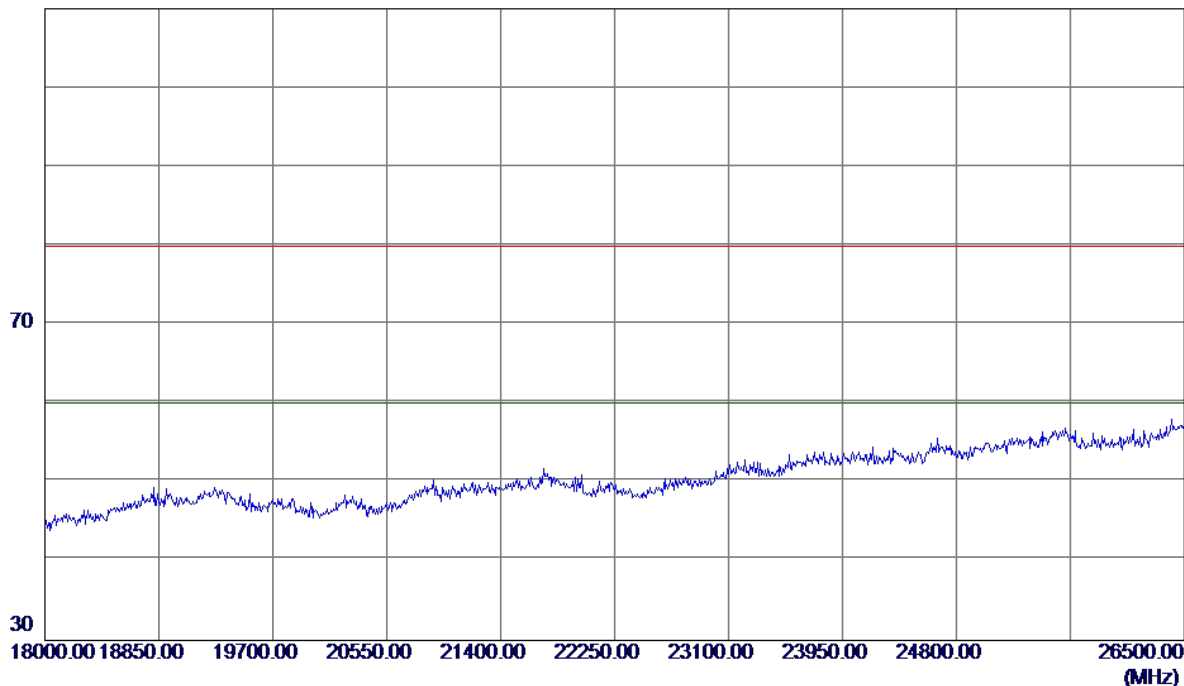

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

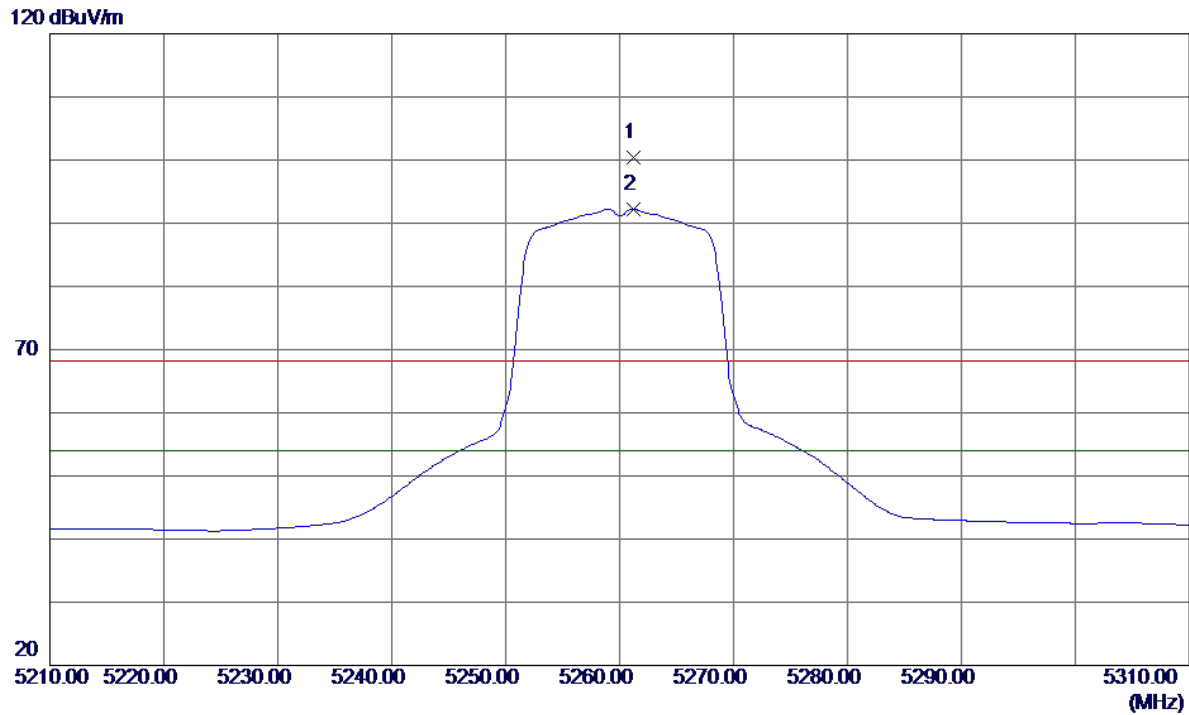


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5261.2000	59.41	40.99	100.40	68.30	32.10	Peak	No Limit
2 *	5261.2000	51.25	40.99	92.24	54.00	38.24	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

110 dBuV/m

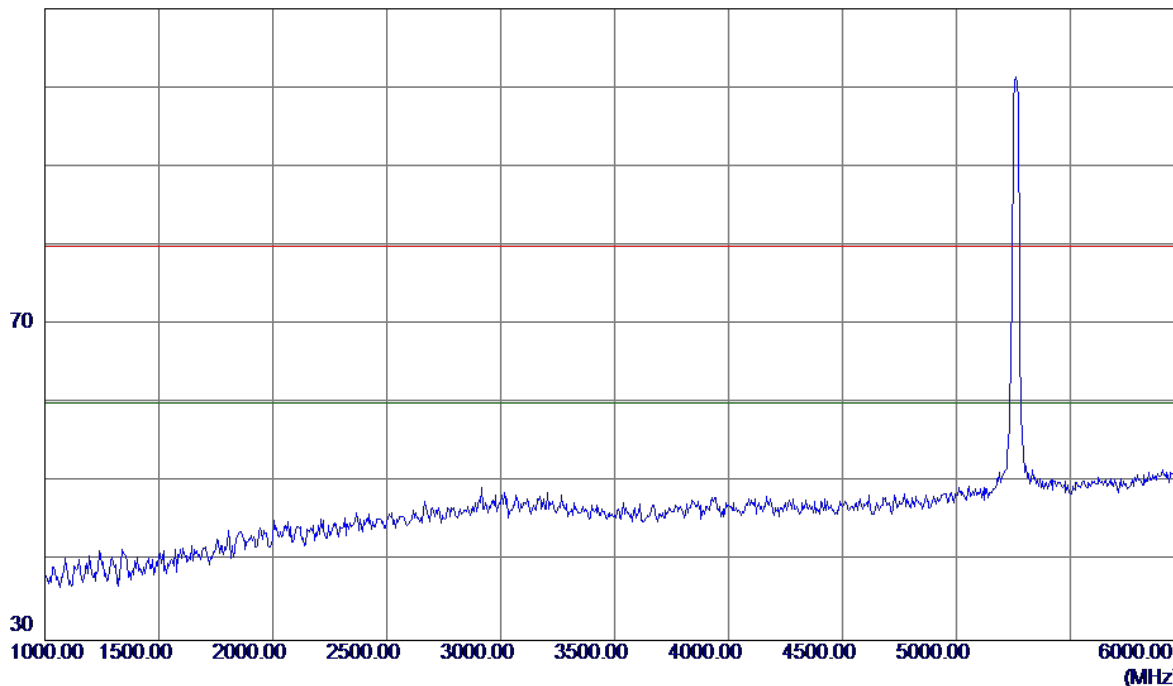


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

110 dBuV/m

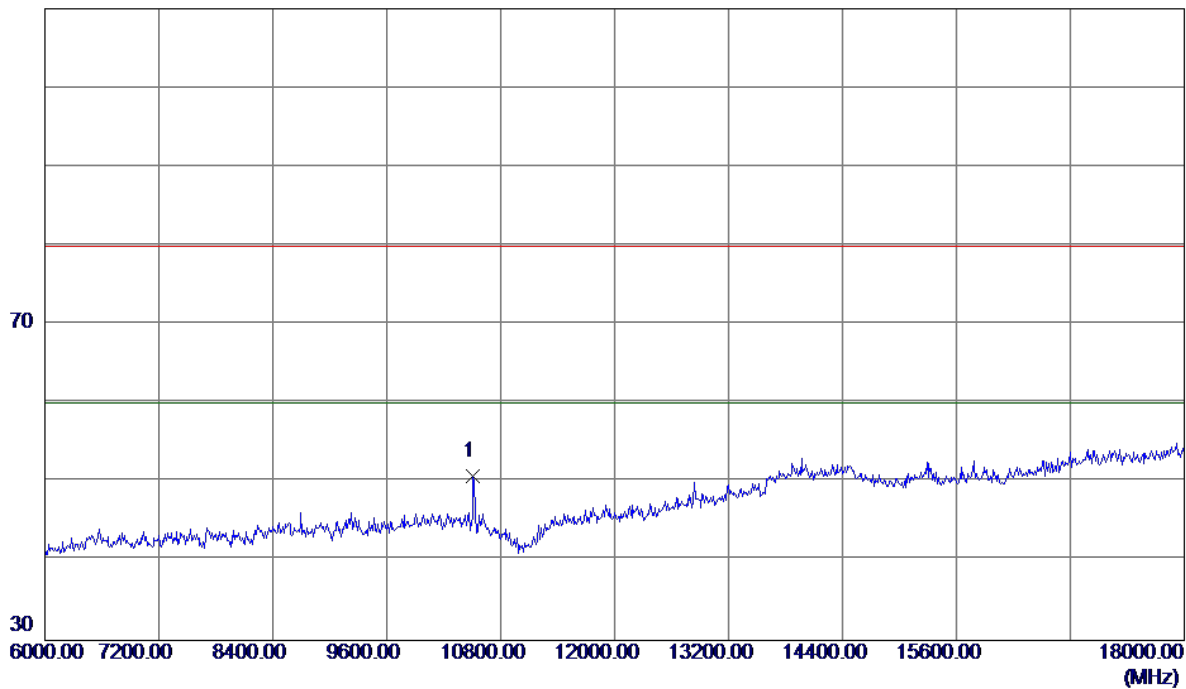


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10512.0000	35.23	15.61	50.84	80.00	-29.16	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

110 dBuV/m

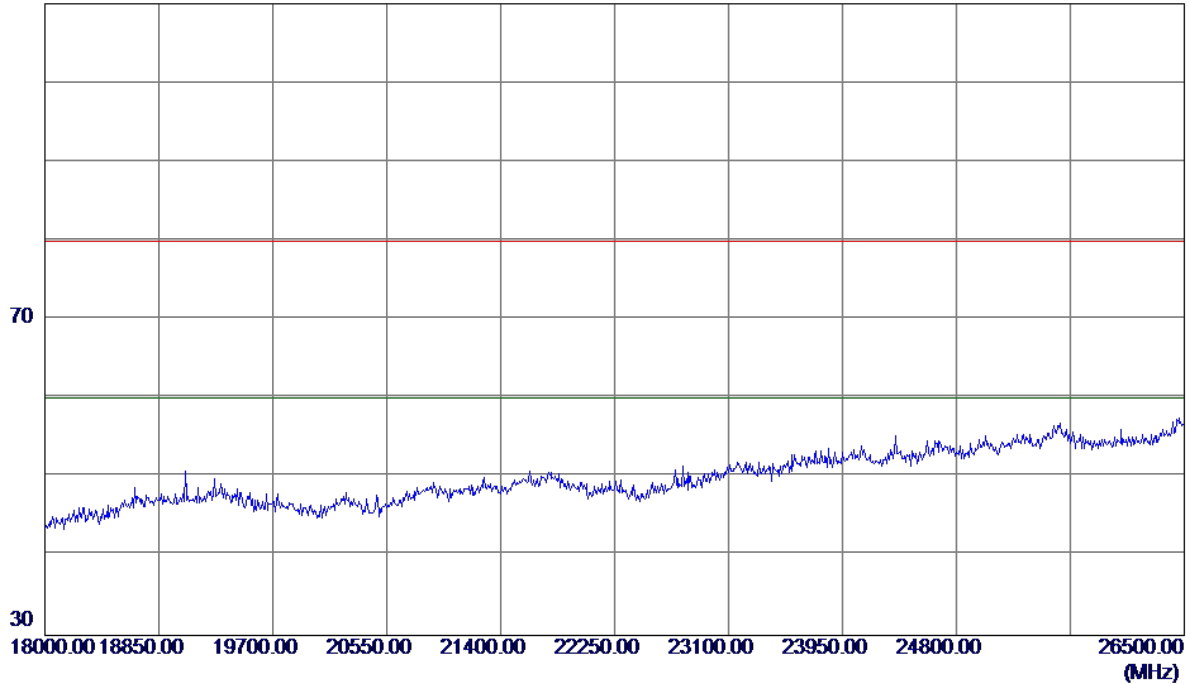


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical


110 dBuV/m

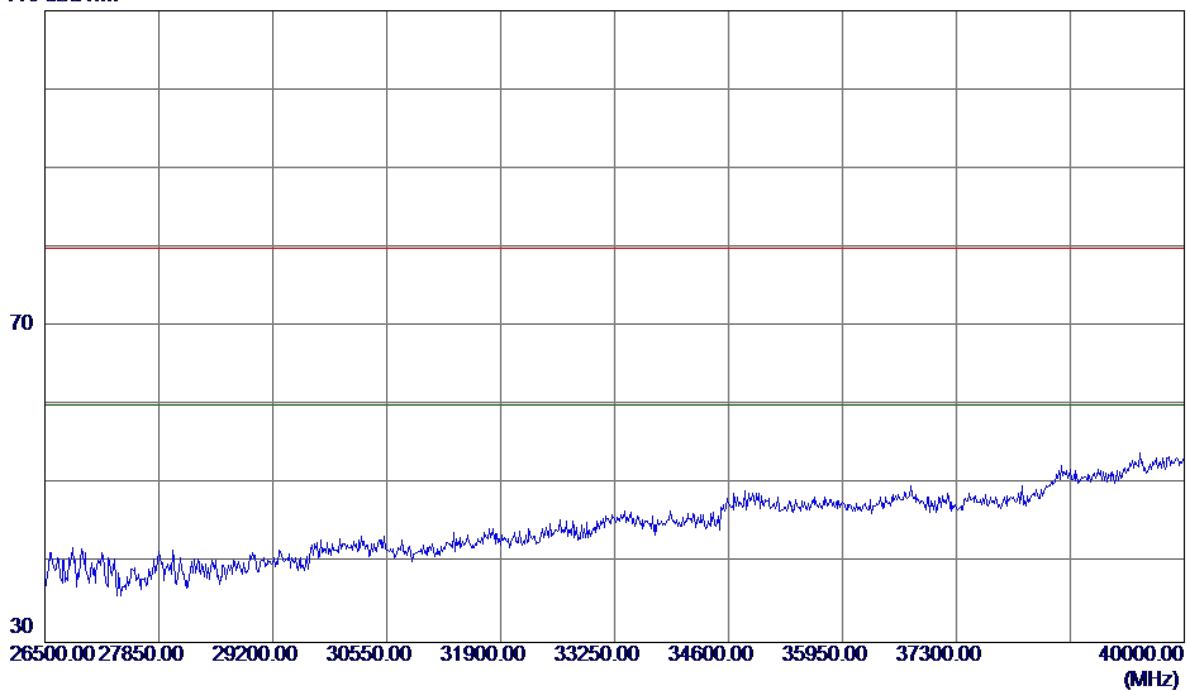

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

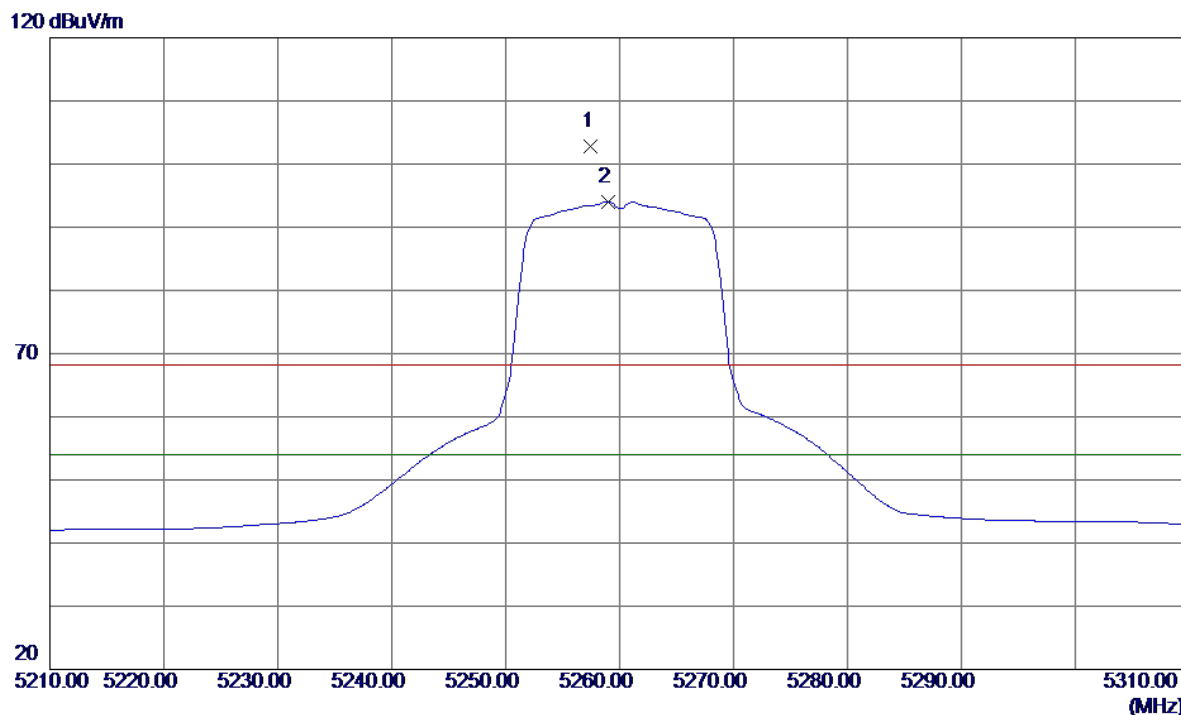


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5257.5000	61.83	40.98	102.81	68.30	34.51	Peak	No Limit
2 *	5259.0000	53.03	40.98	94.01	54.00	40.01	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

110 dBuV/m

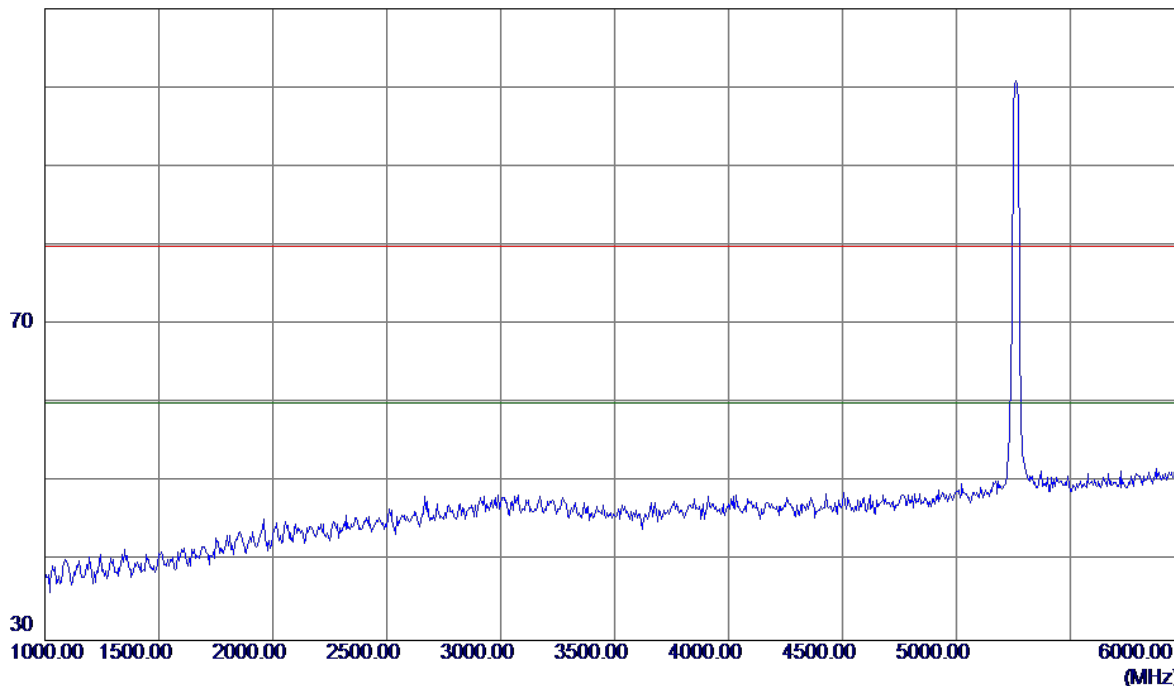


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

110 dBuV/m

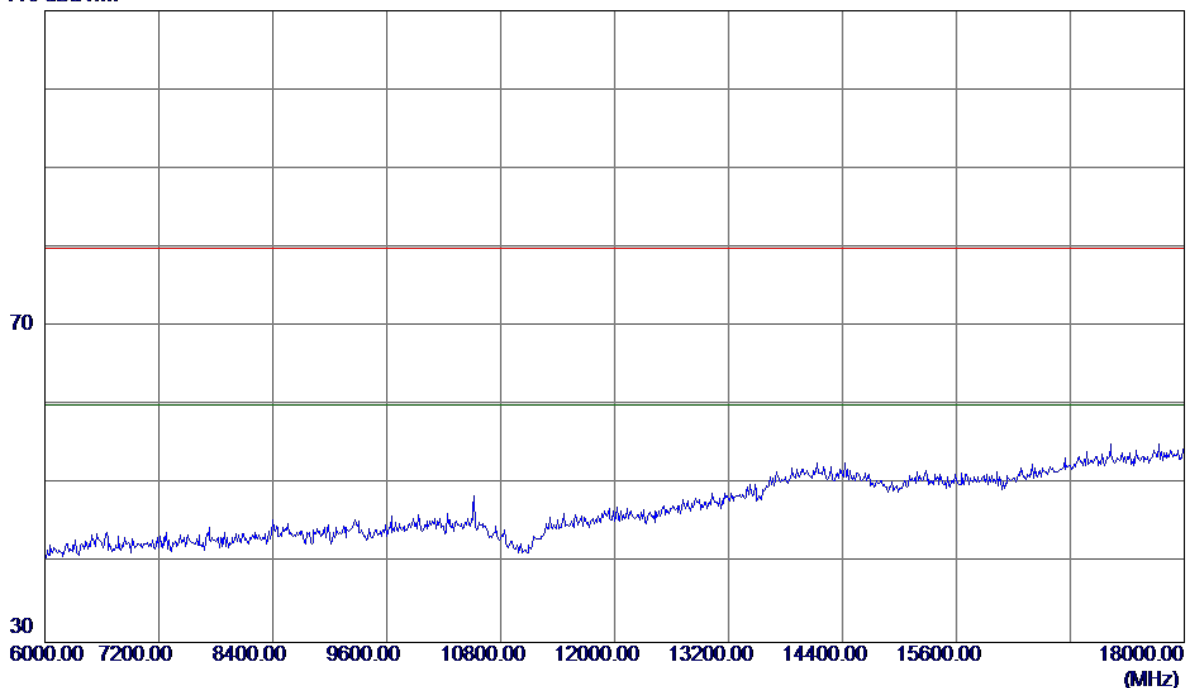


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

110 dBuV/m

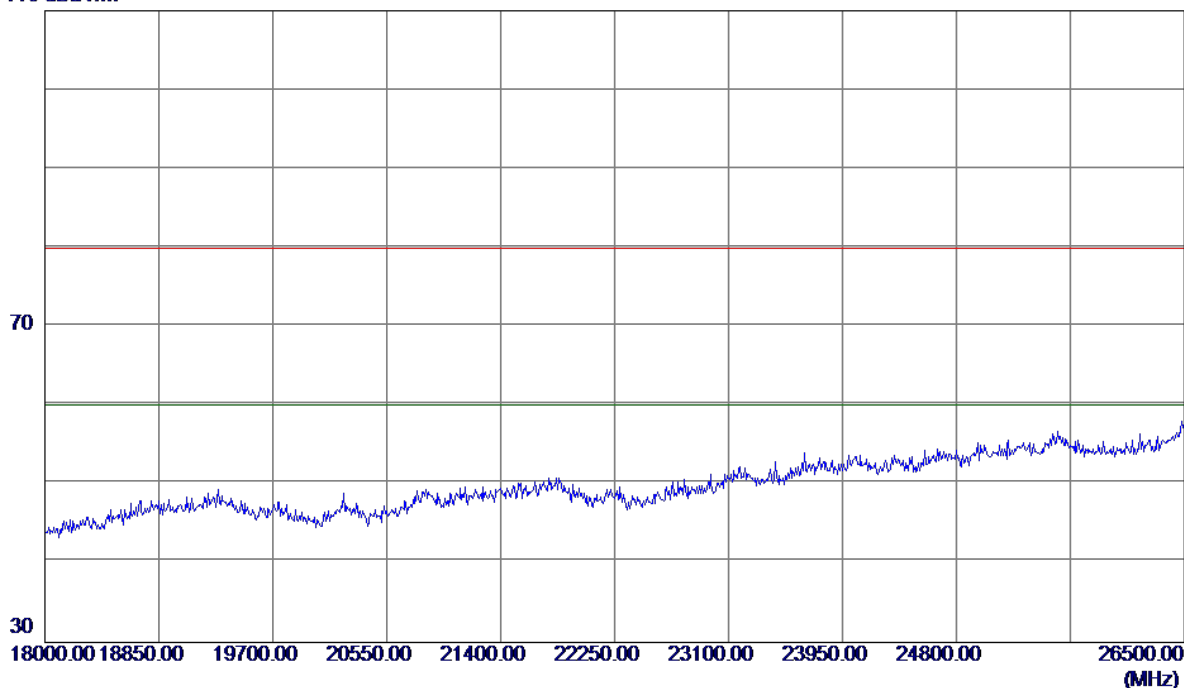


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal


110 dBuV/m

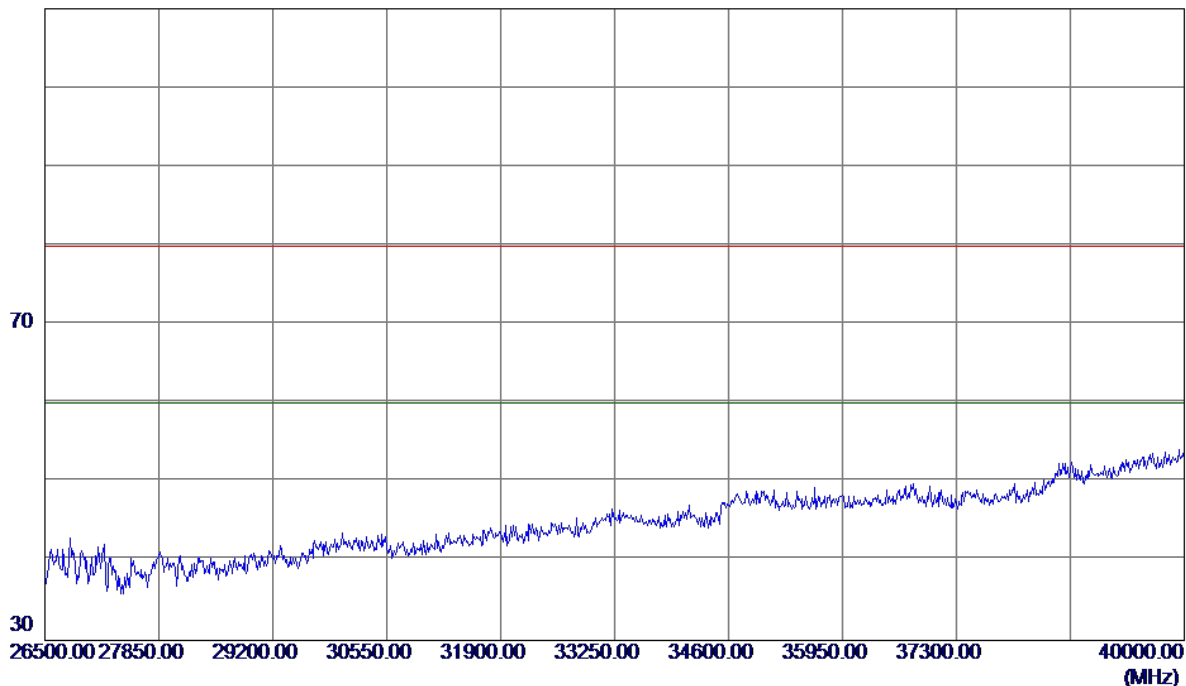

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

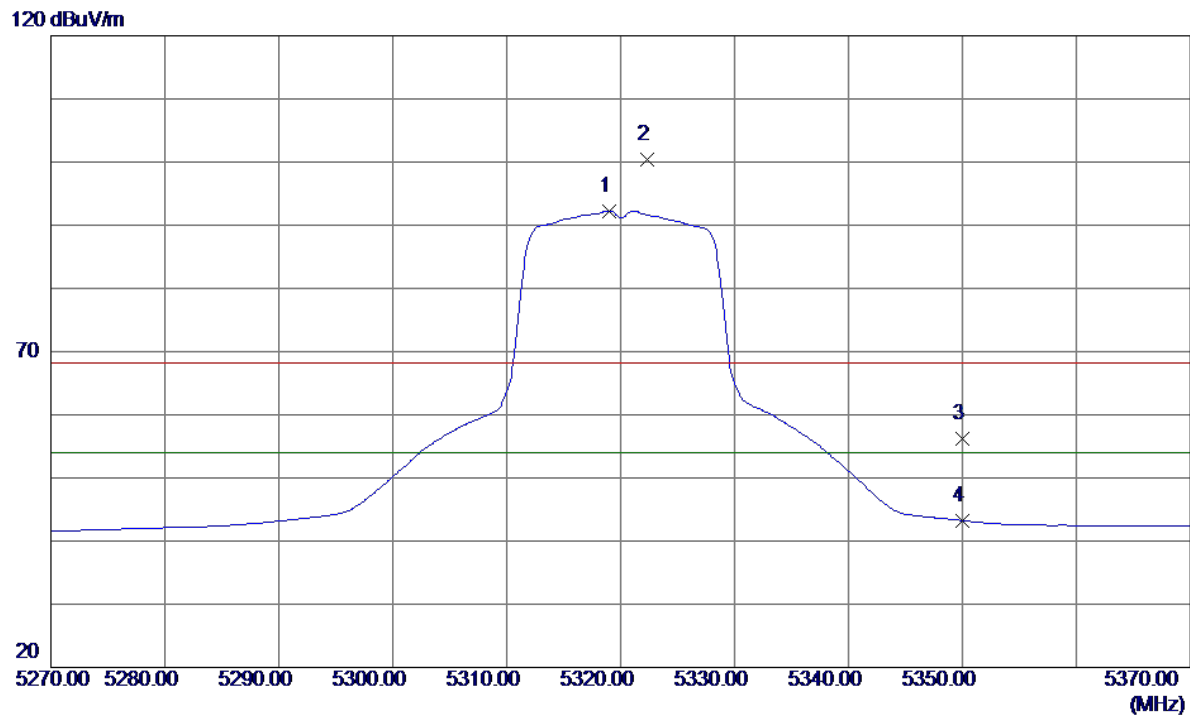


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5319.0000	51.11	41.18	92.29	54.00	38.29	AVG	No Limit
2	5322.3000	59.26	41.19	100.45	68.30	32.15	Peak	No Limit
3	5350.0000	14.90	41.28	56.18	68.30	-12.12	Peak	
4	5350.0000	1.97	41.28	43.25	54.00	-10.75	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

110 dBuV/m

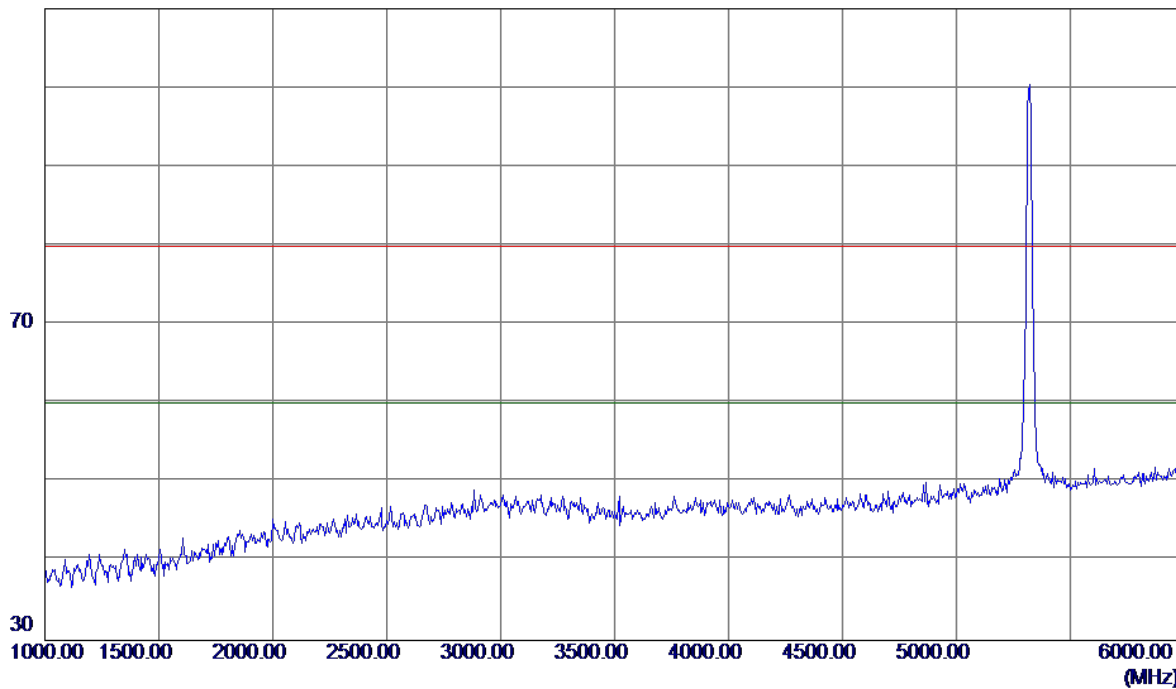


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

110 dBuV/m

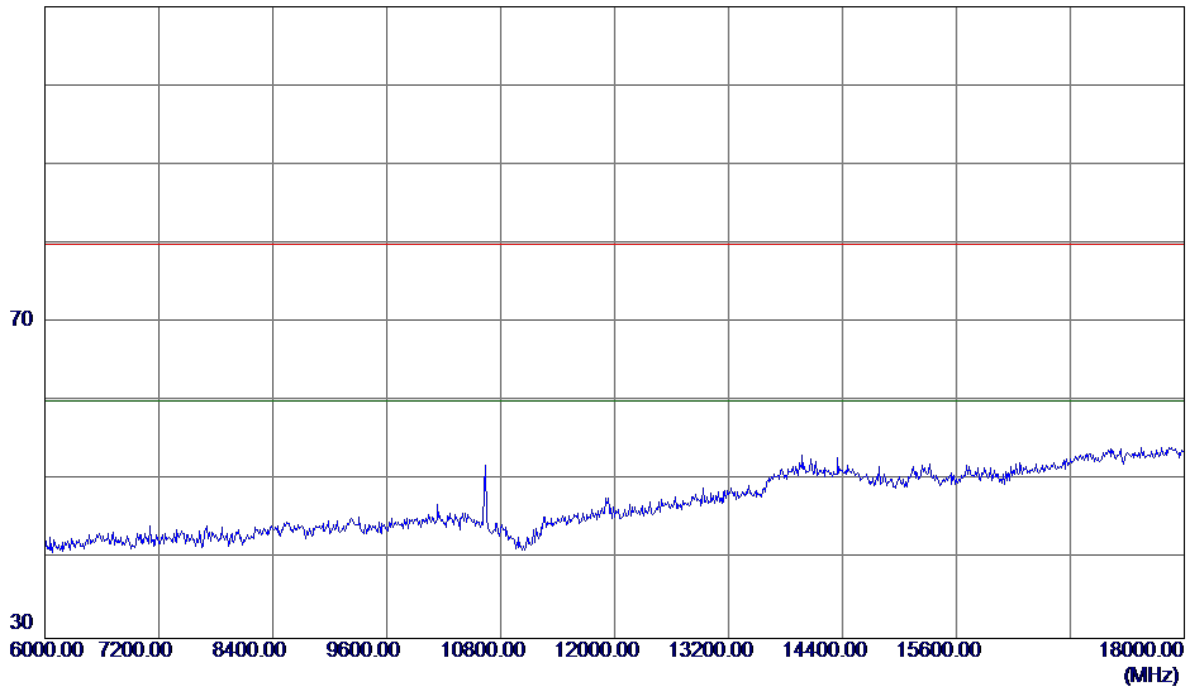


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

110 dBuV/m

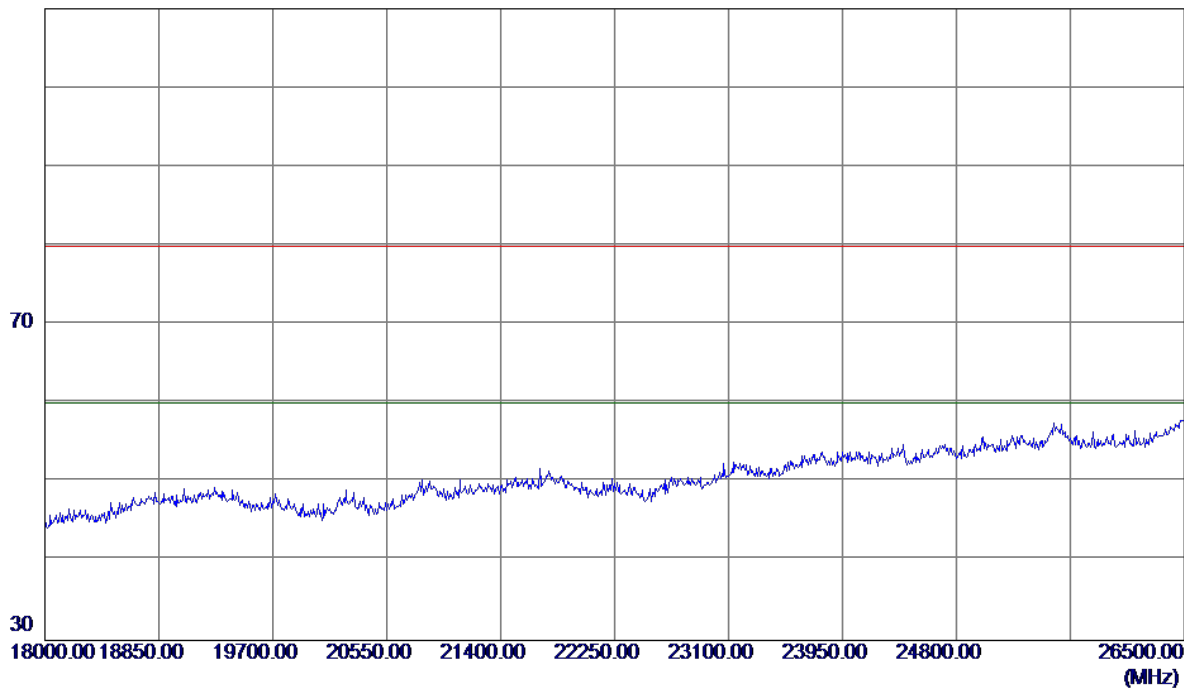


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical


110 dBuV/m

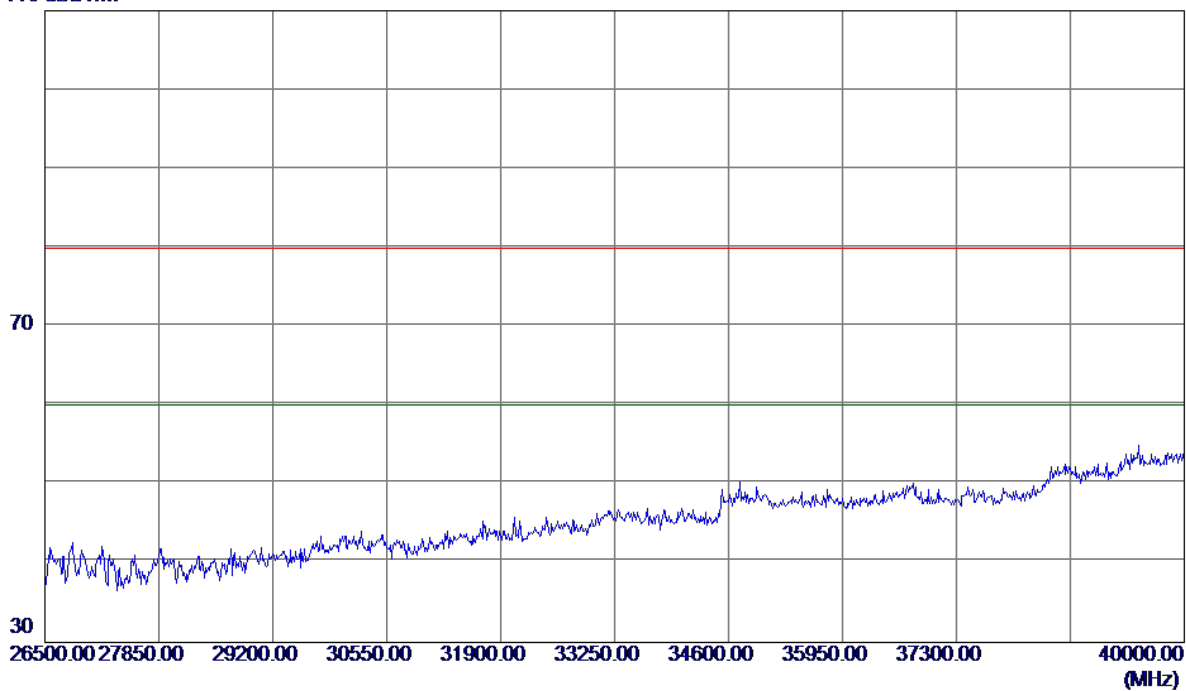

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

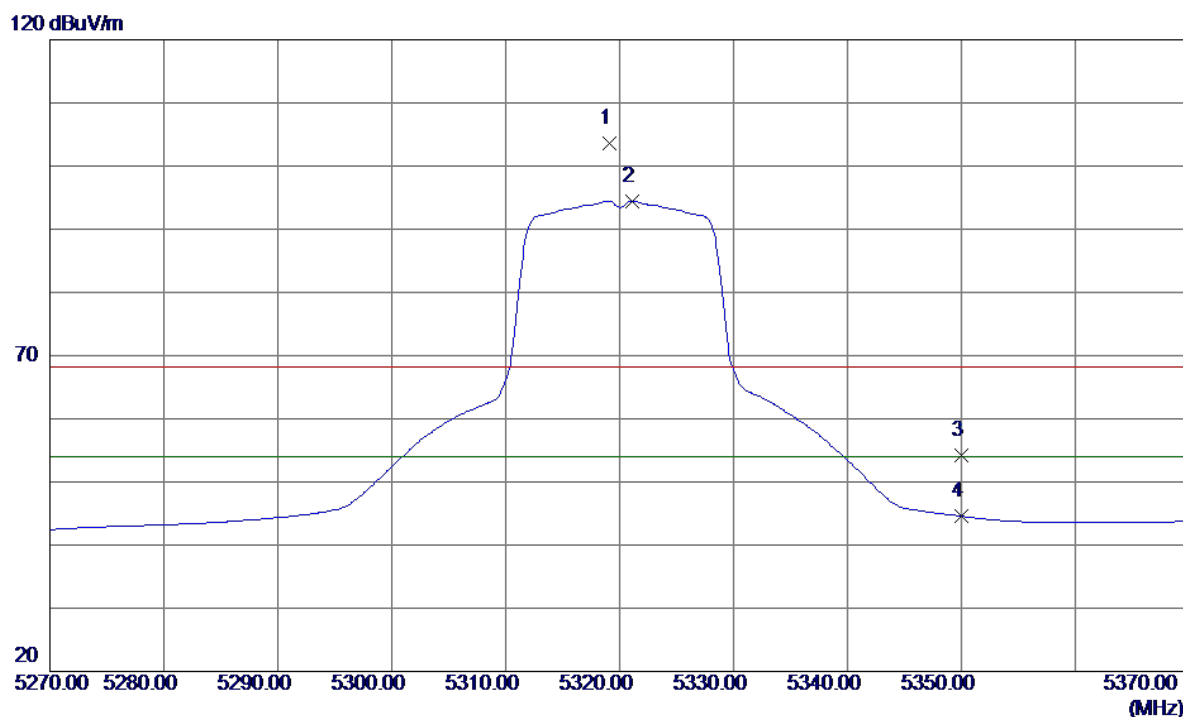


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5319.1000	62.34	41.18	103.52	68.30	35.22	Peak	No Limit
2 *	5321.1000	53.30	41.19	94.49	54.00	40.49	AVG	No Limit
3	5350.0000	12.95	41.28	54.23	68.30	-14.07	Peak	
4	5350.0000	3.29	41.28	44.57	54.00	-9.43	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

110 dBuV/m

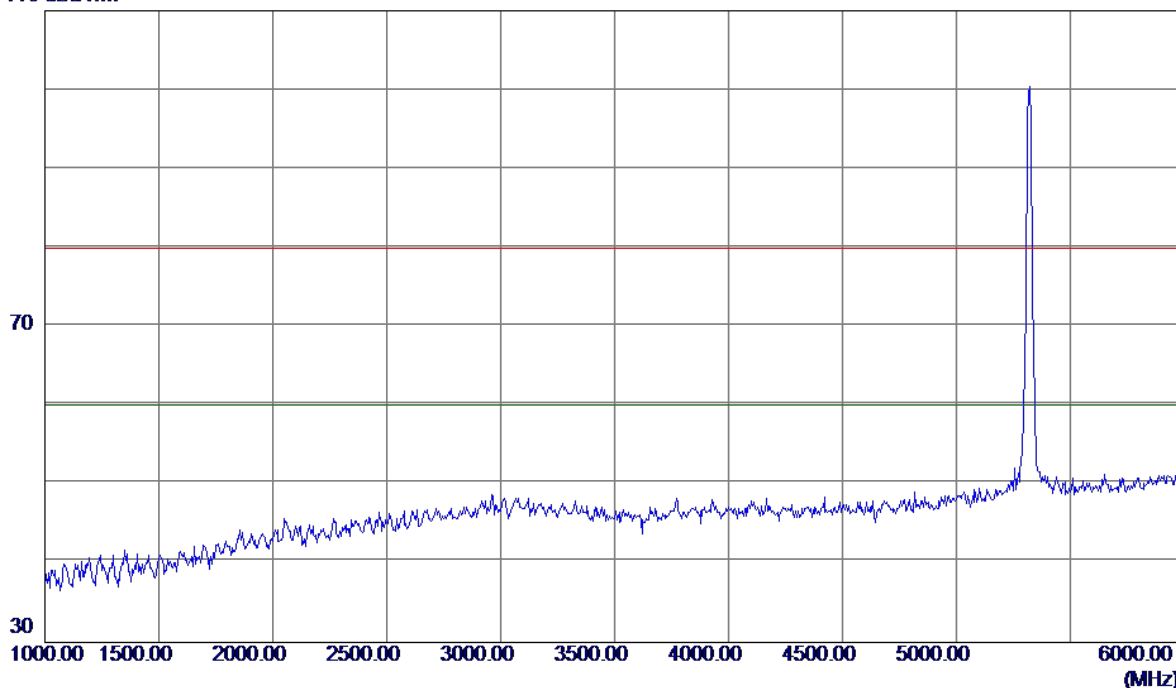


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

110 dBuV/m

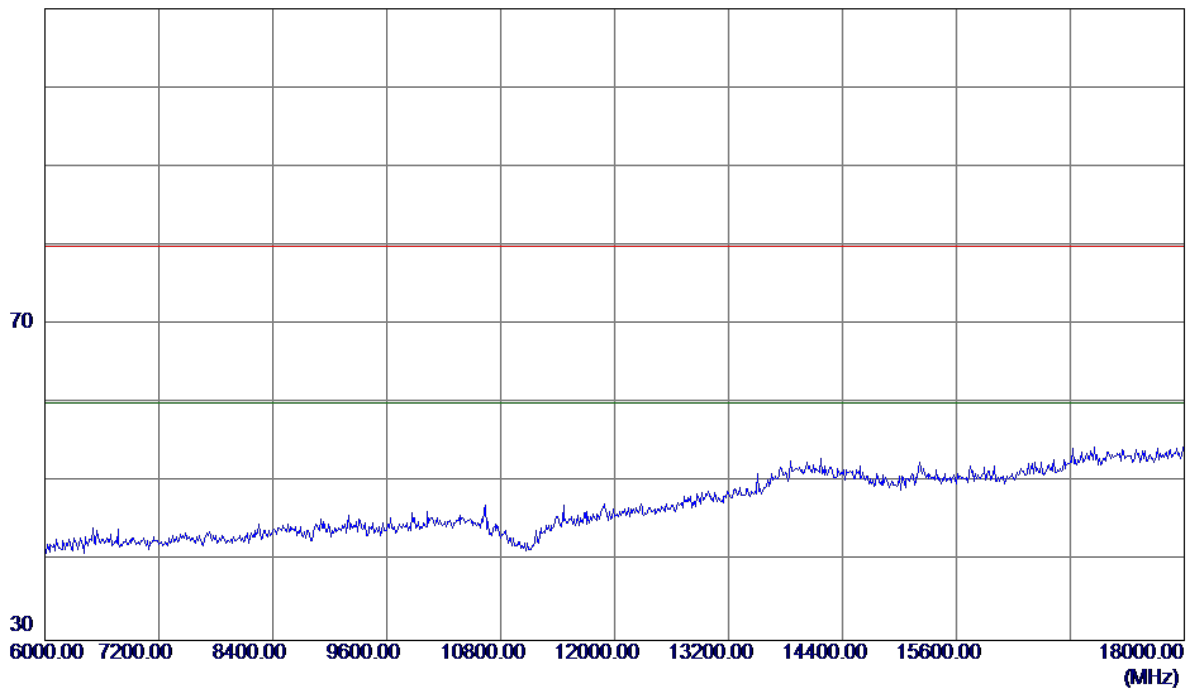


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

110 dBuV/m

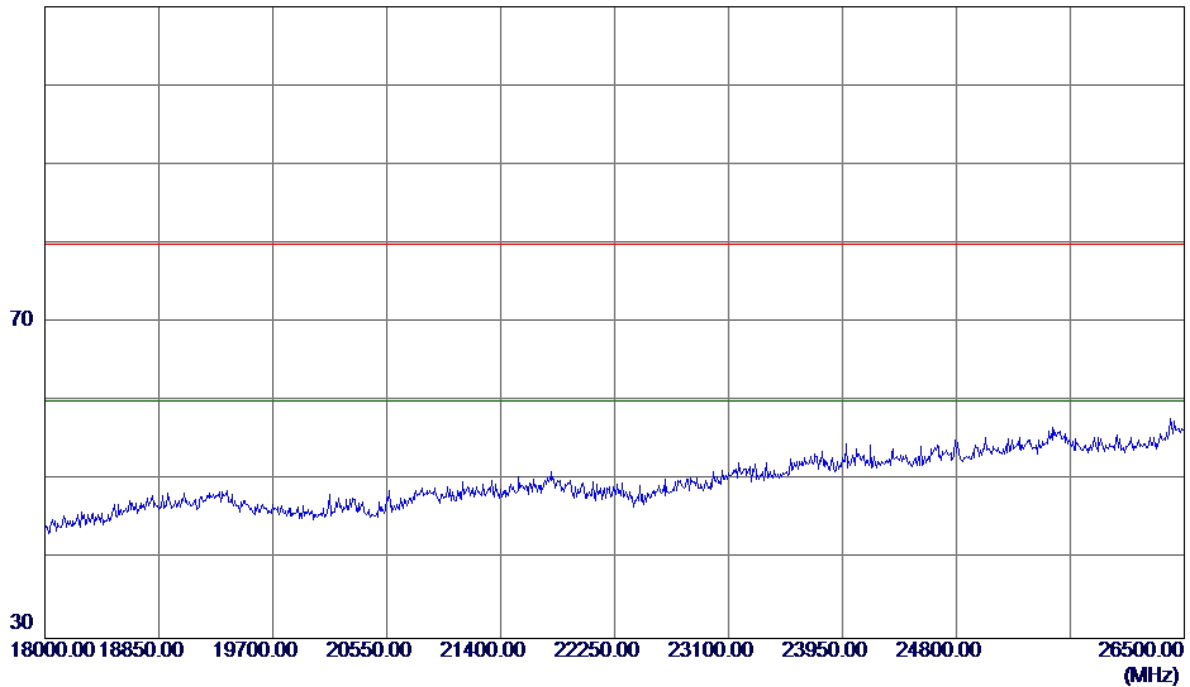


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal


110 dBuV/m

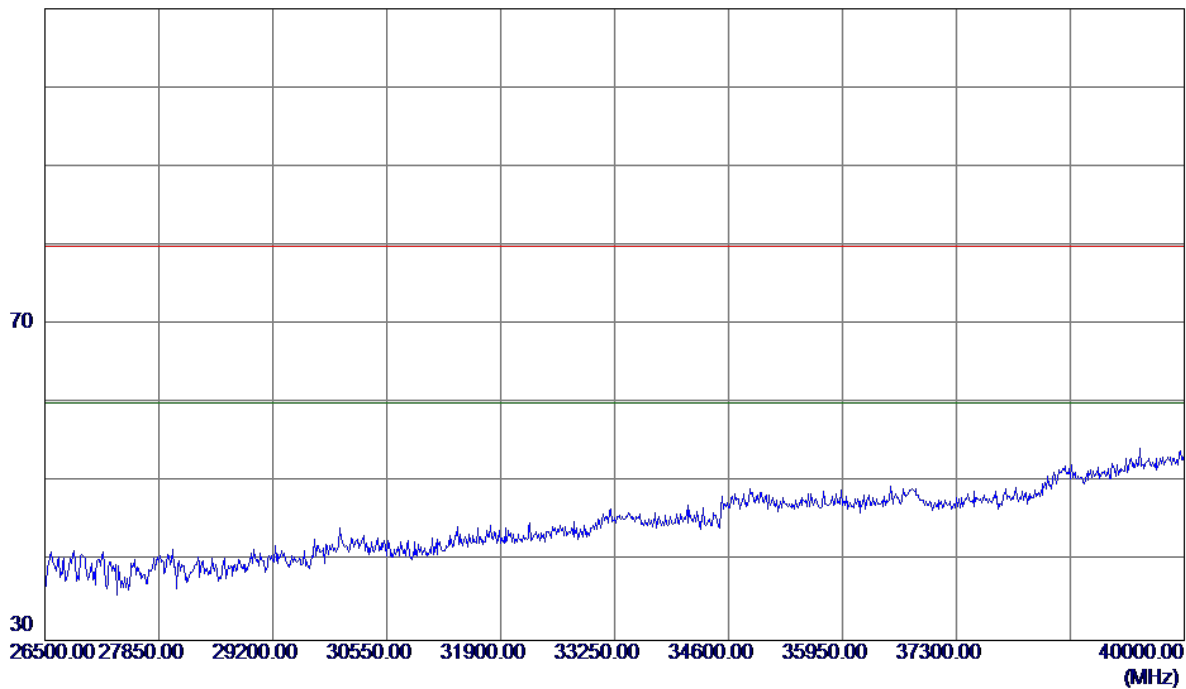

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

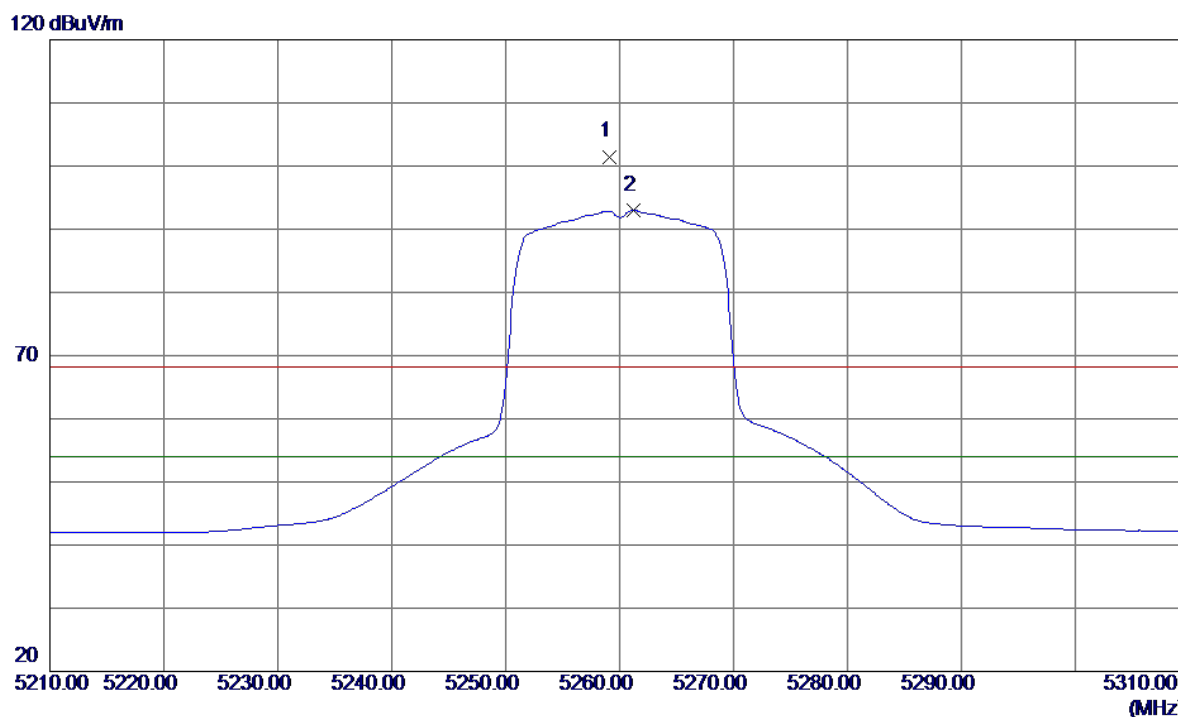


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5259.1000	60.52	40.98	101.50	68.30	33.20	Peak	No Limit
2 *	5261.2000	52.00	40.99	92.99	54.00	38.99	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

110 dBuV/m

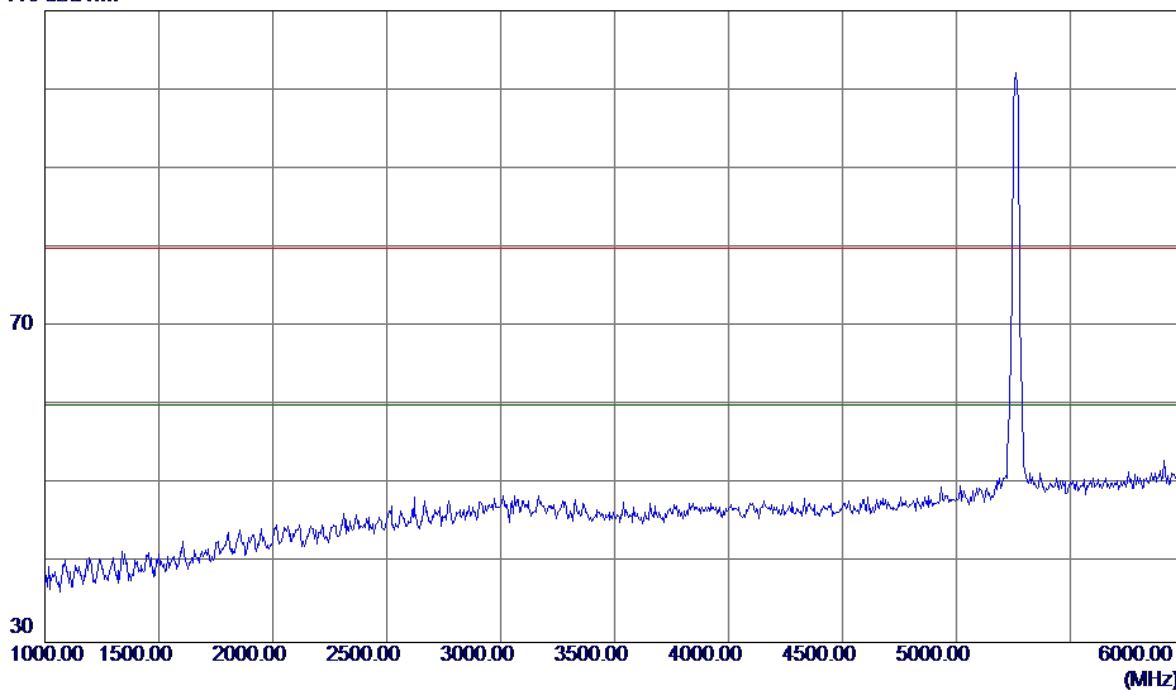


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

110 dBuV/m

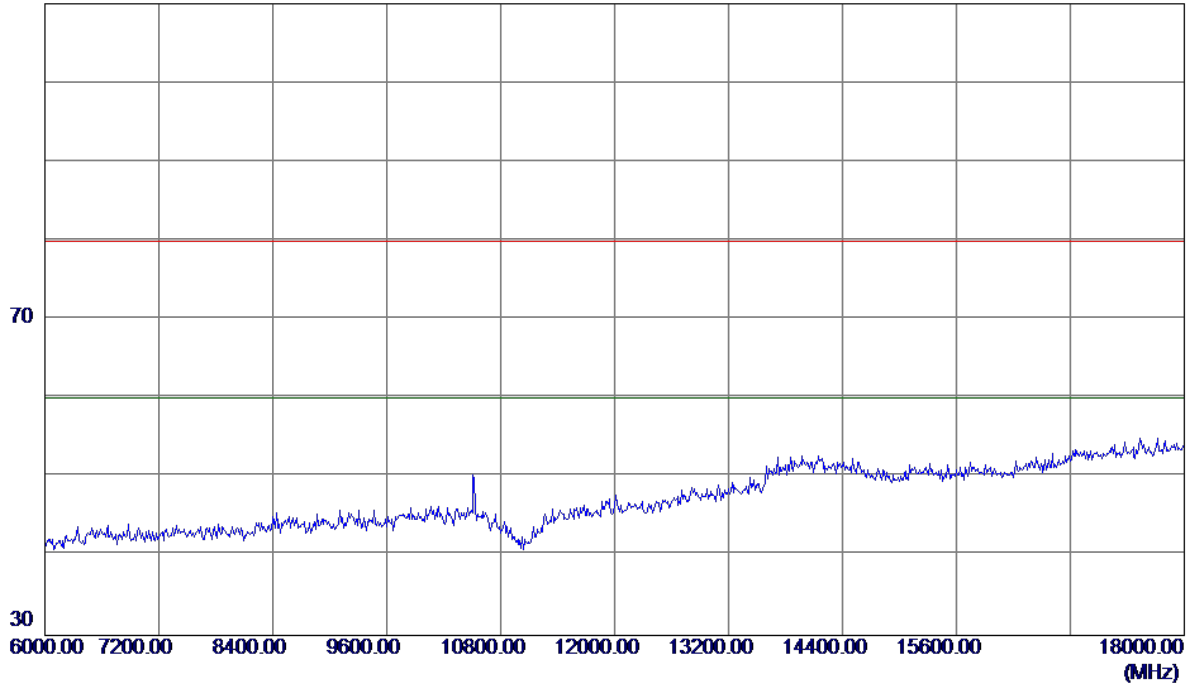

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

110 dBuV/m




No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical


110 dBuV/m

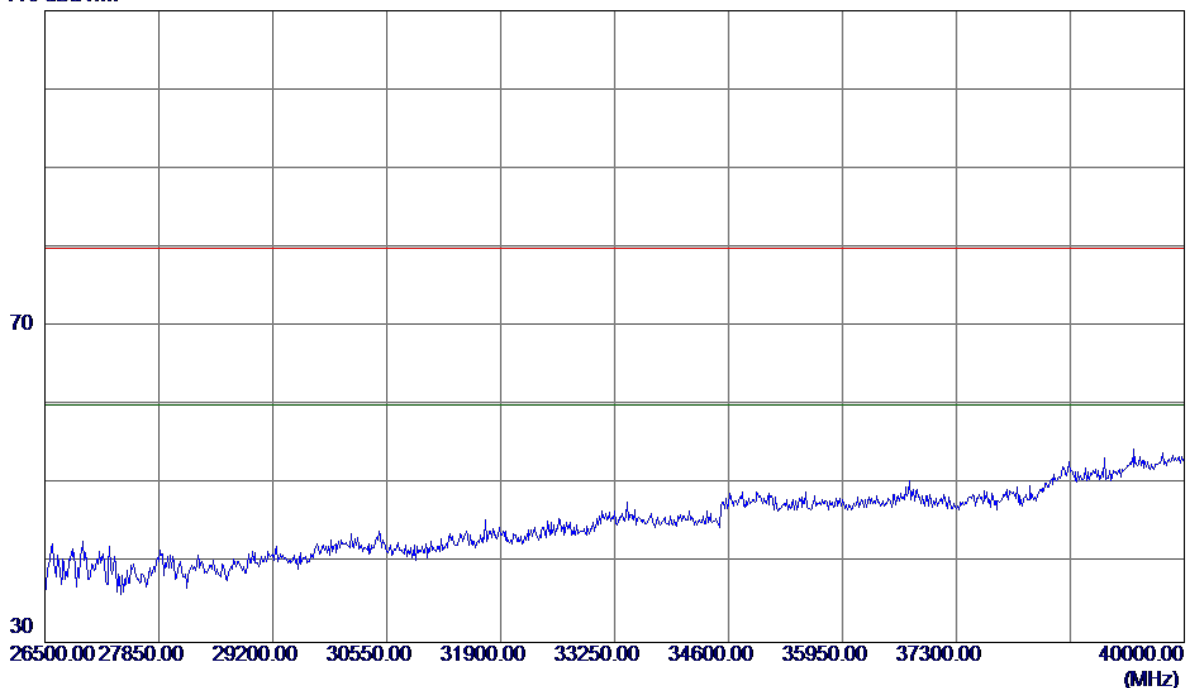

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

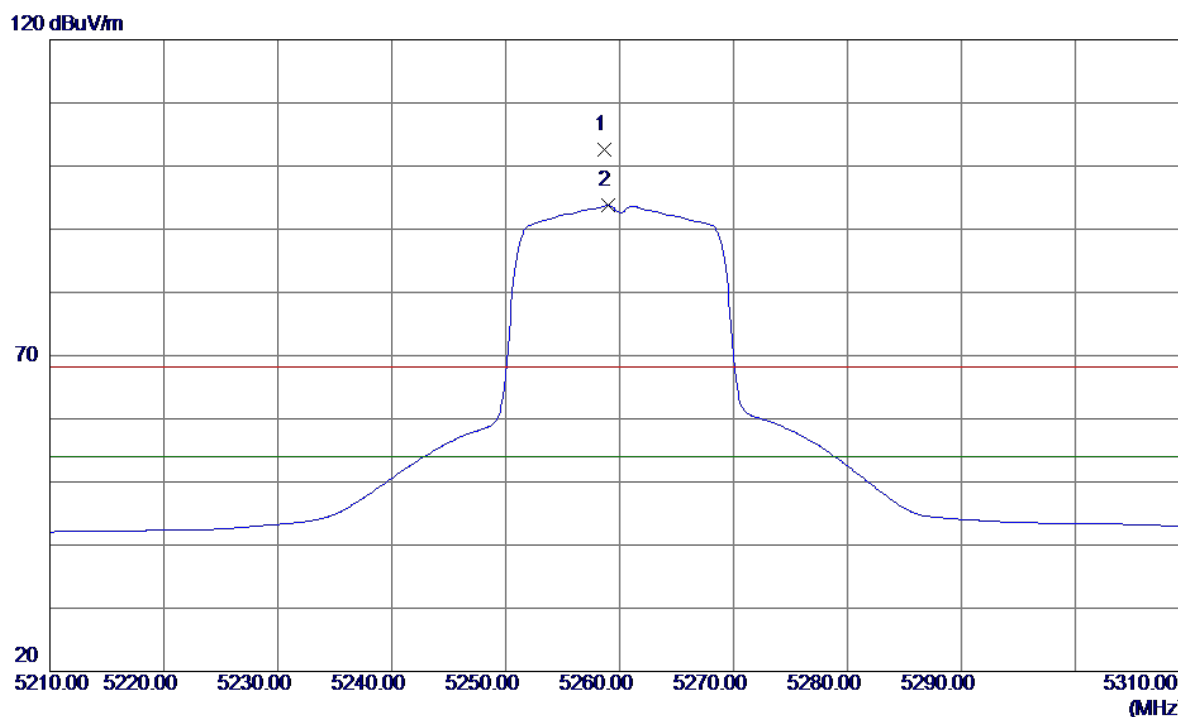


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5258.7000	61.53	40.98	102.51	68.30	34.21	Peak	No Limit
2 *	5259.0000	52.75	40.98	93.73	54.00	39.73	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

110 dBuV/m

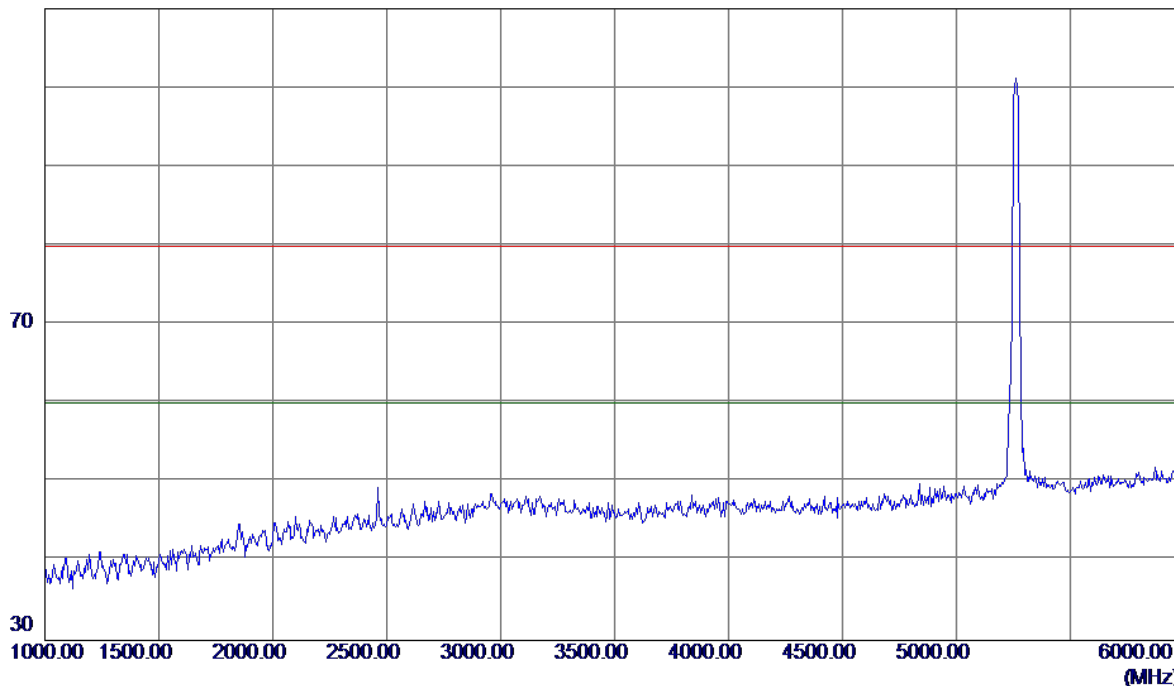


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

110 dBuV/m

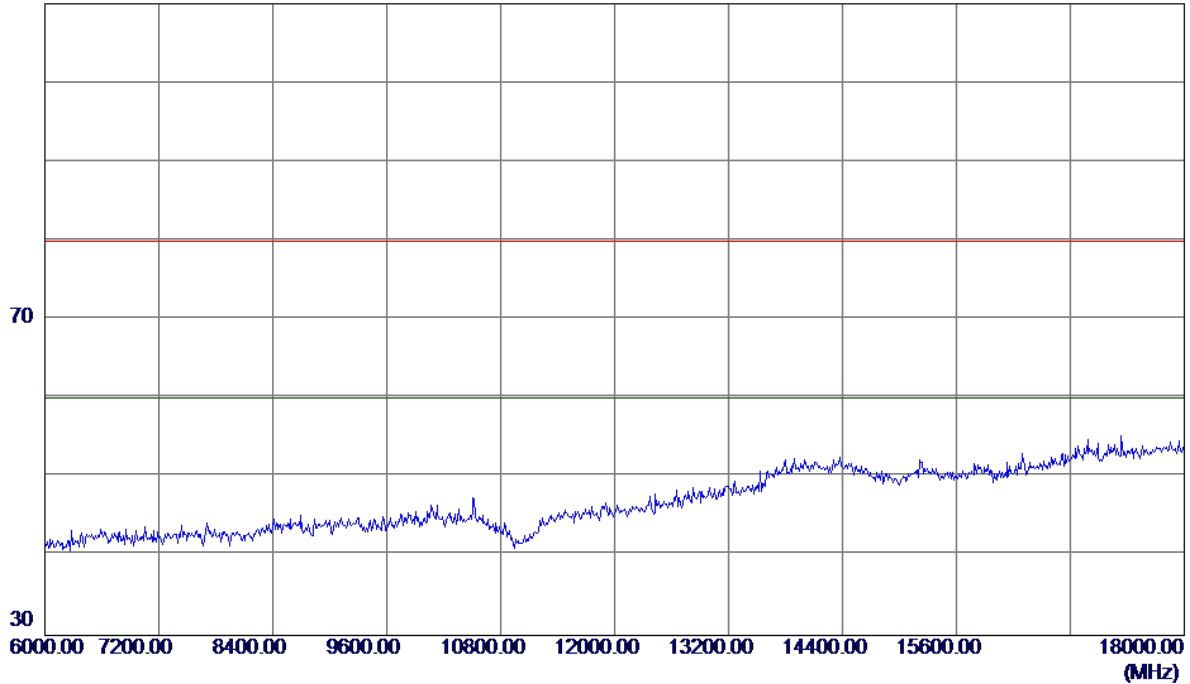


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

110 dBuV/m

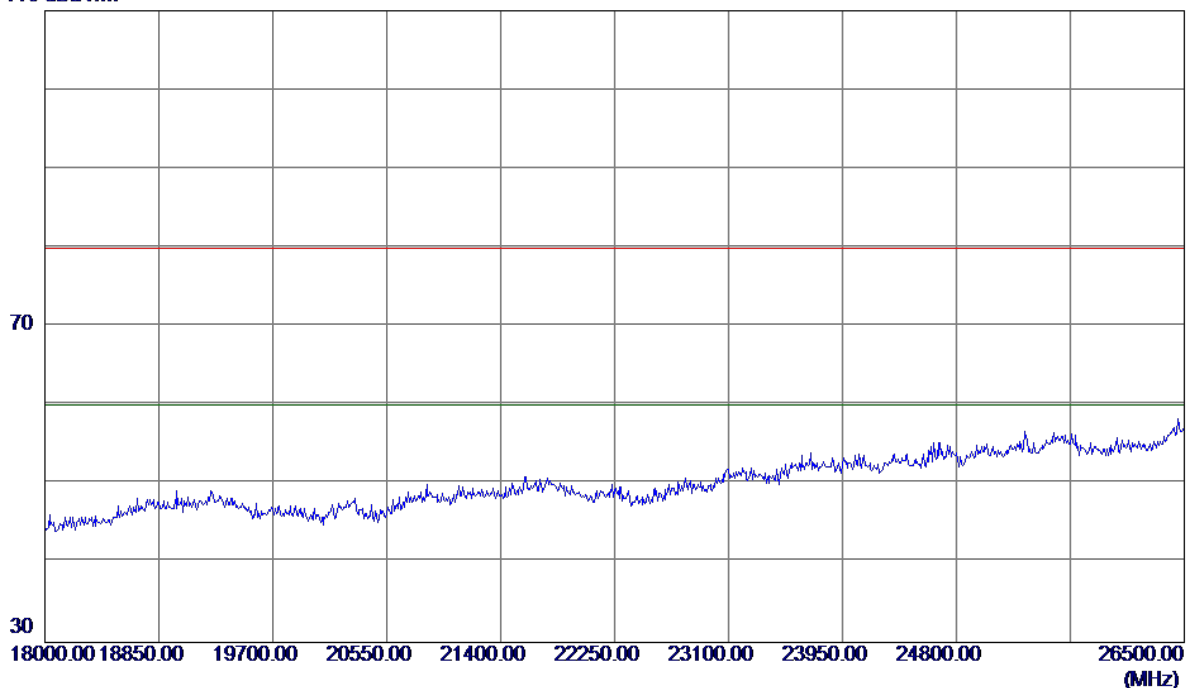


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal


110 dBuV/m

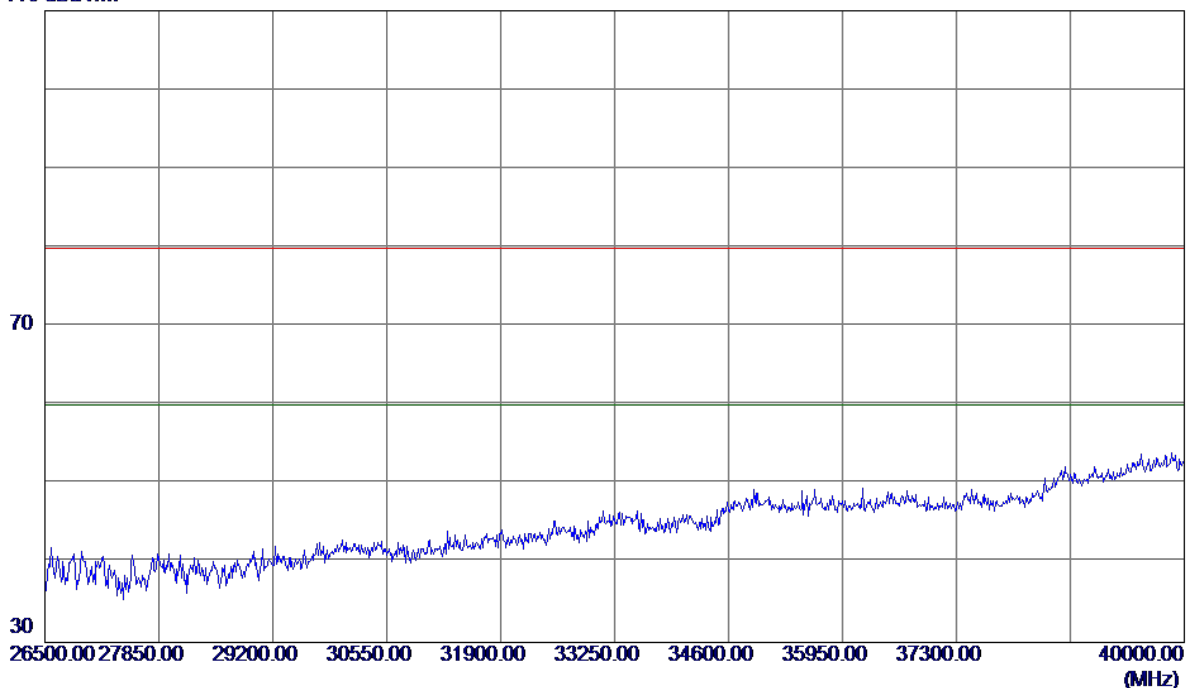

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

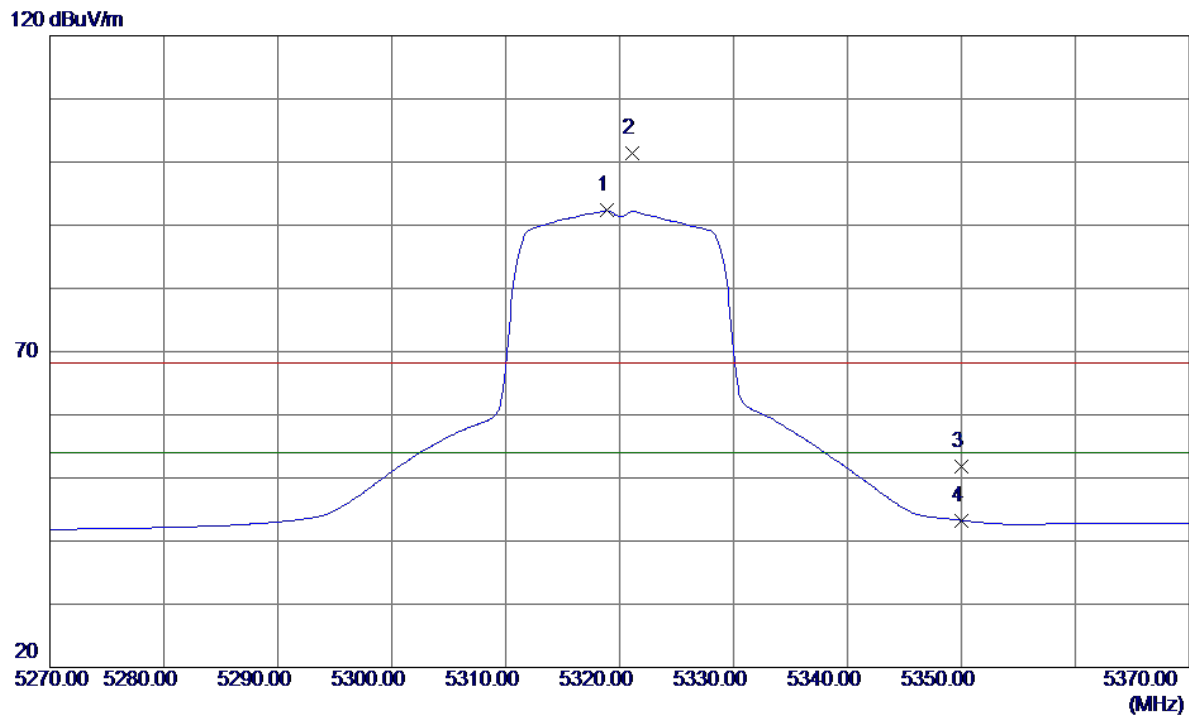


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5318.9000	51.13	41.18	92.31	54.00	38.31	AVG	No Limit
2	5321.1000	60.14	41.19	101.33	68.30	33.03	Peak	No Limit
3	5350.0000	10.51	41.28	51.79	68.30	-16.51	Peak	
4	5350.0000	1.99	41.28	43.27	54.00	-10.73	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

110 dBuV/m

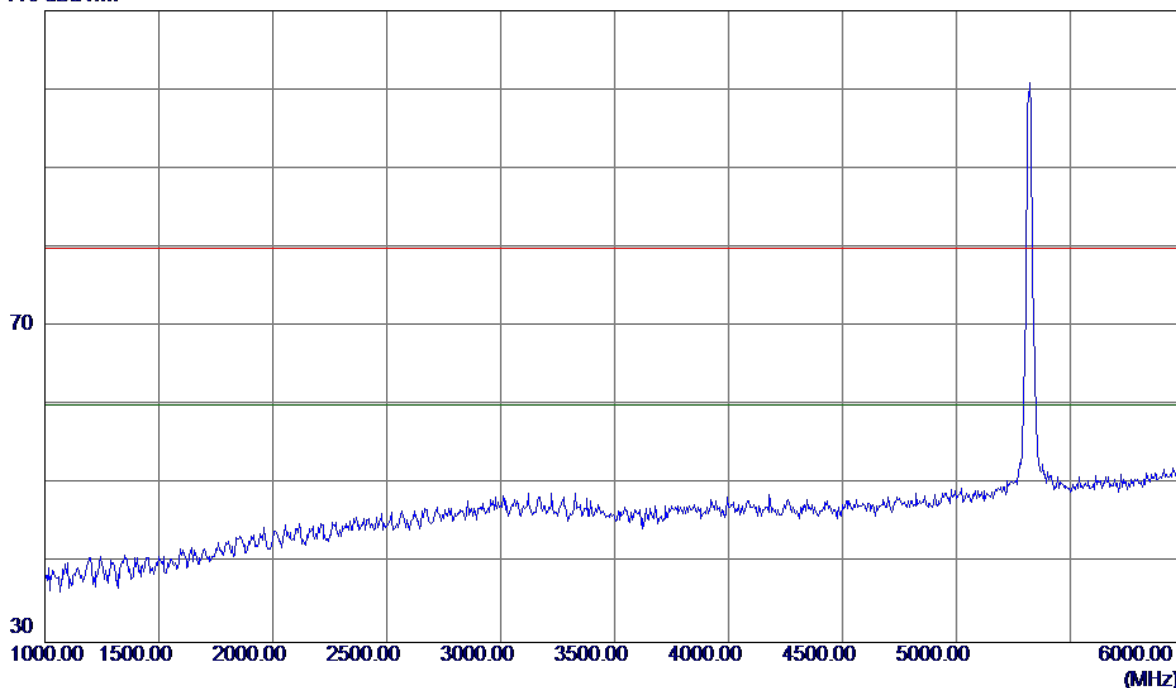


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

110 dBuV/m

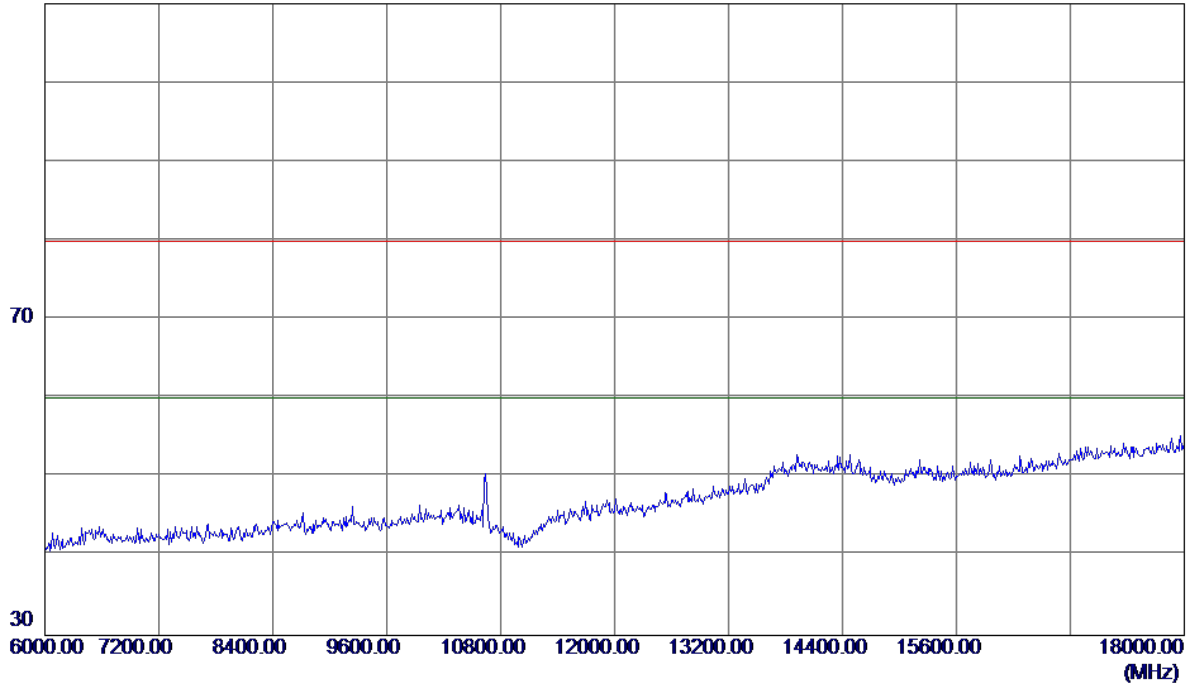


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

110 dBuV/m

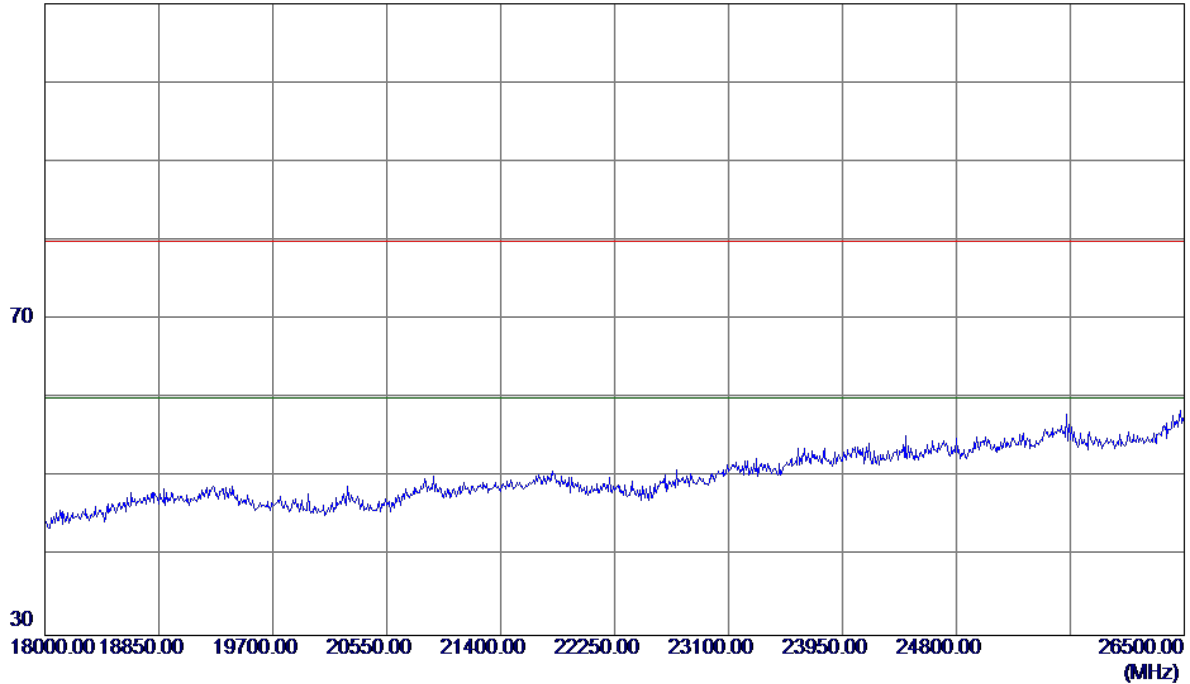


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical


110 dBuV/m

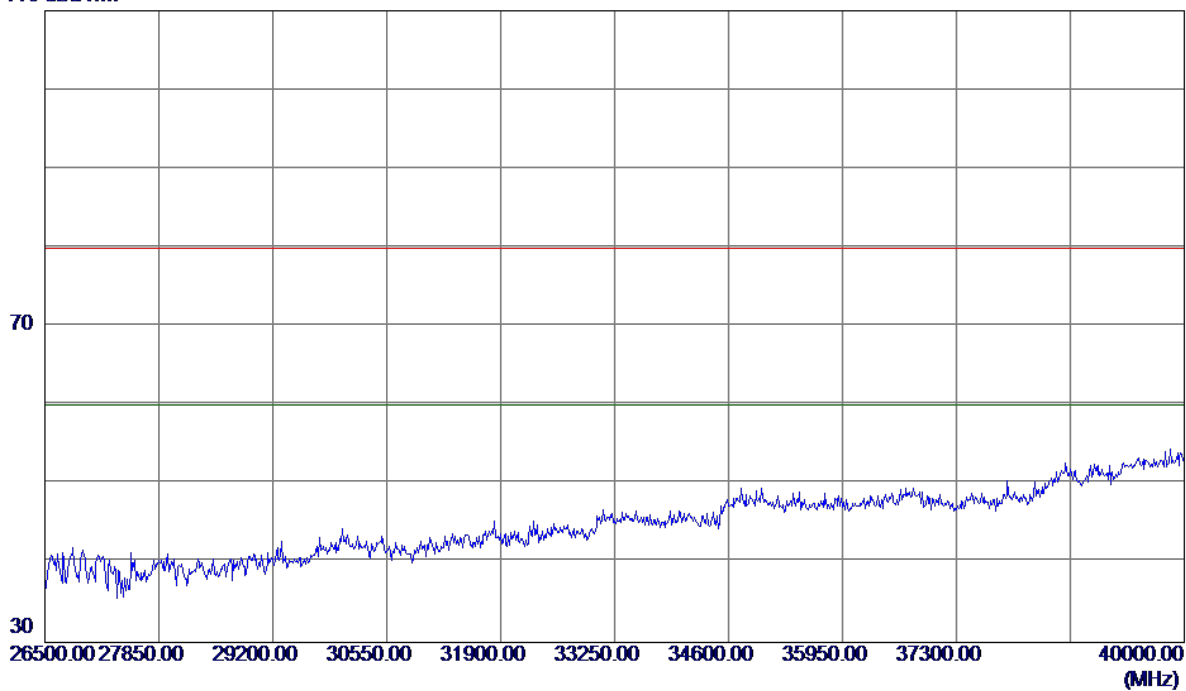

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

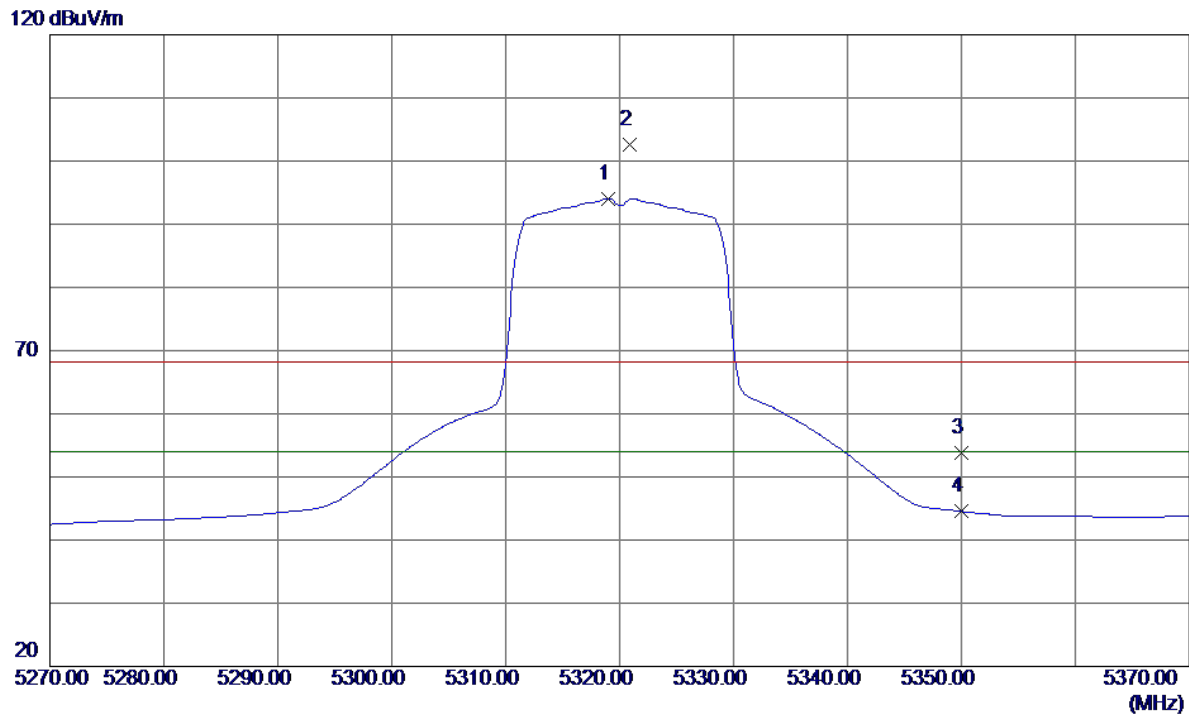


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5319.0000	52.86	41.18	94.04	54.00	40.04	AVG	No Limit
2	5320.9000	61.37	41.19	102.56	68.30	34.26	Peak	No Limit
3	5350.0000	12.60	41.28	53.88	68.30	-14.42	Peak	
4	5350.0000	3.24	41.28	44.52	54.00	-9.48	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

110 dBuV/m

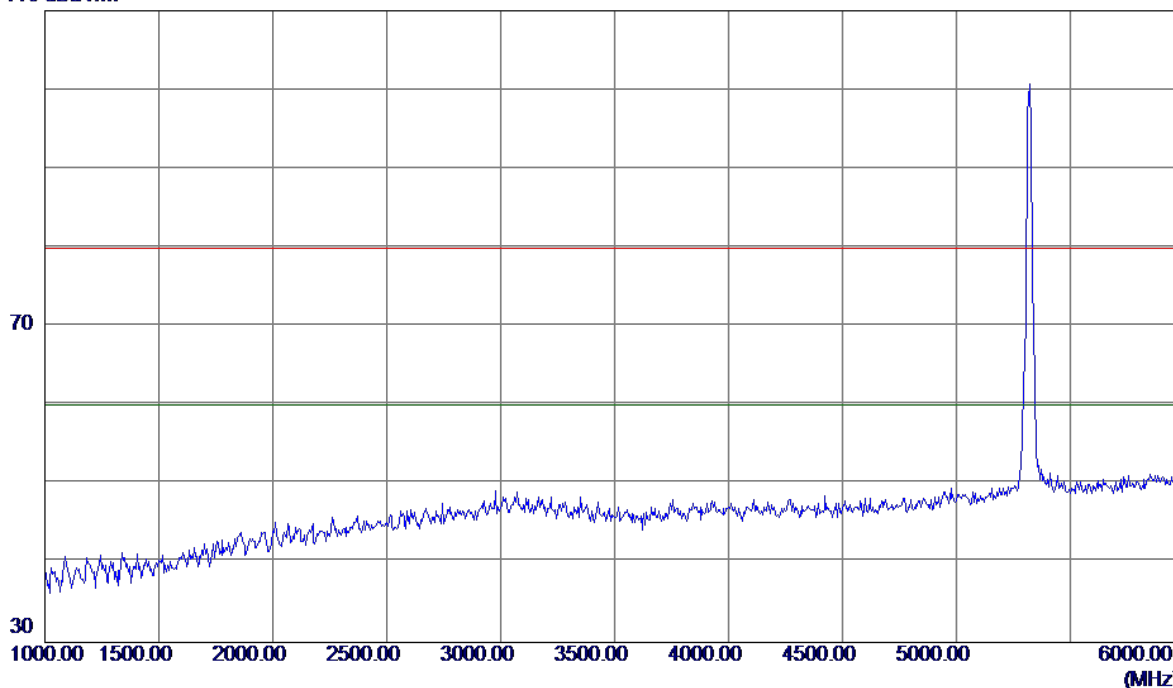


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

110 dBuV/m

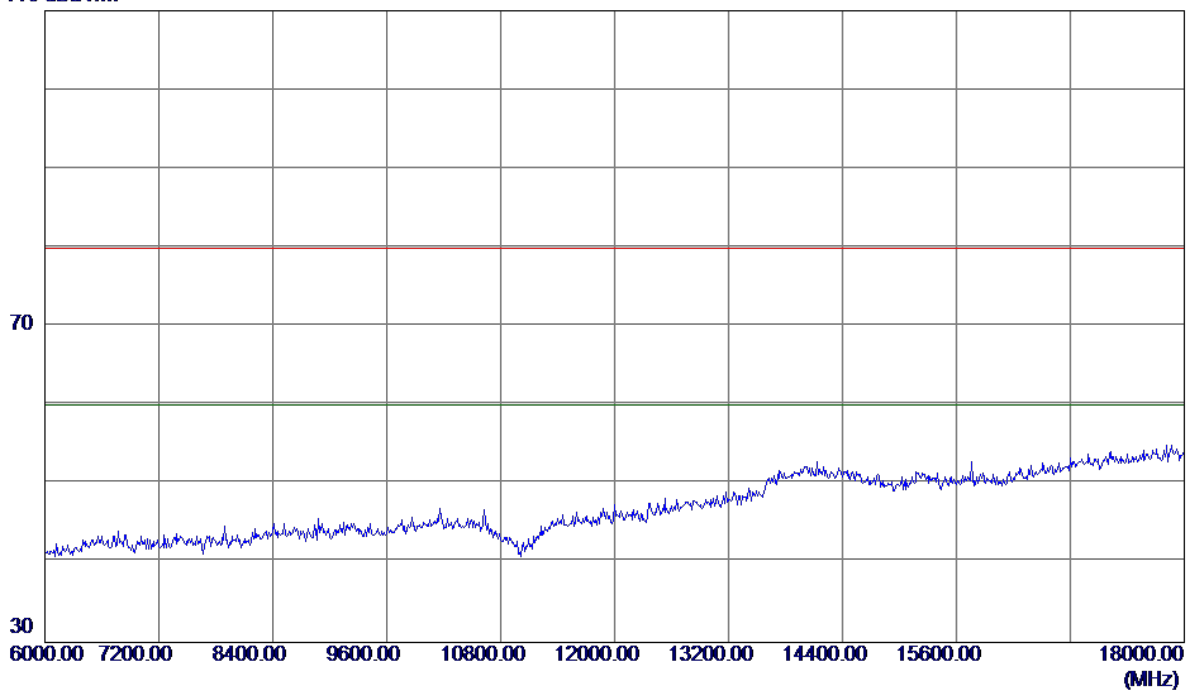


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

110 dBuV/m

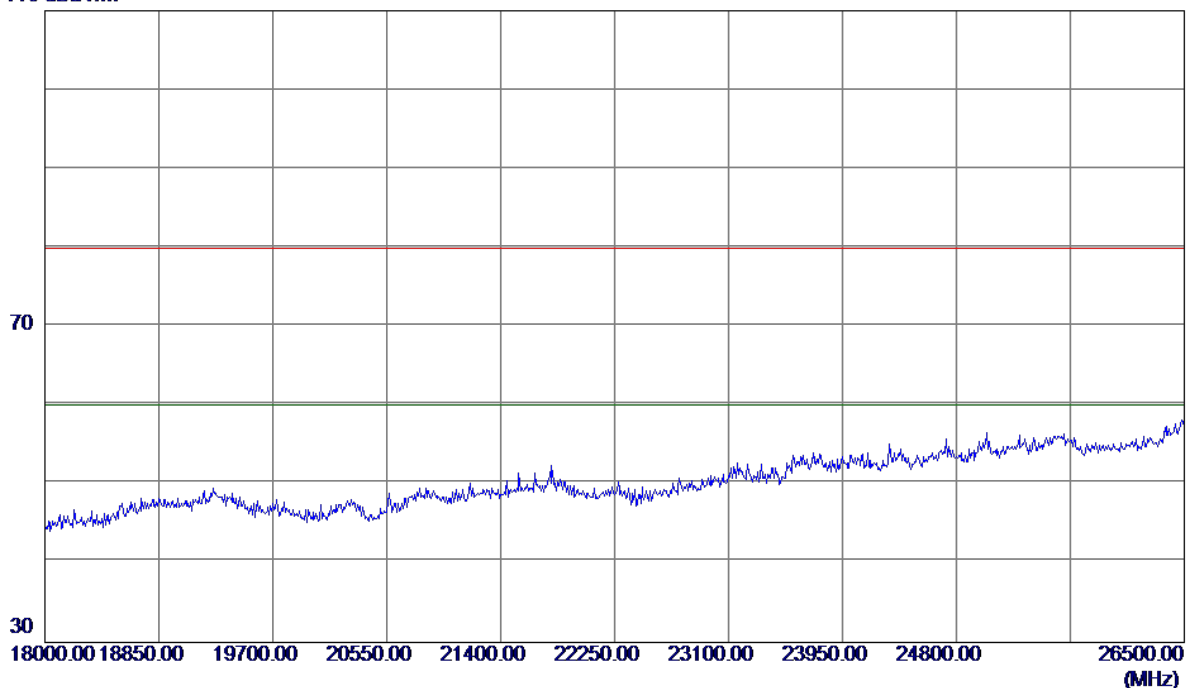


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

110 dBuV/m

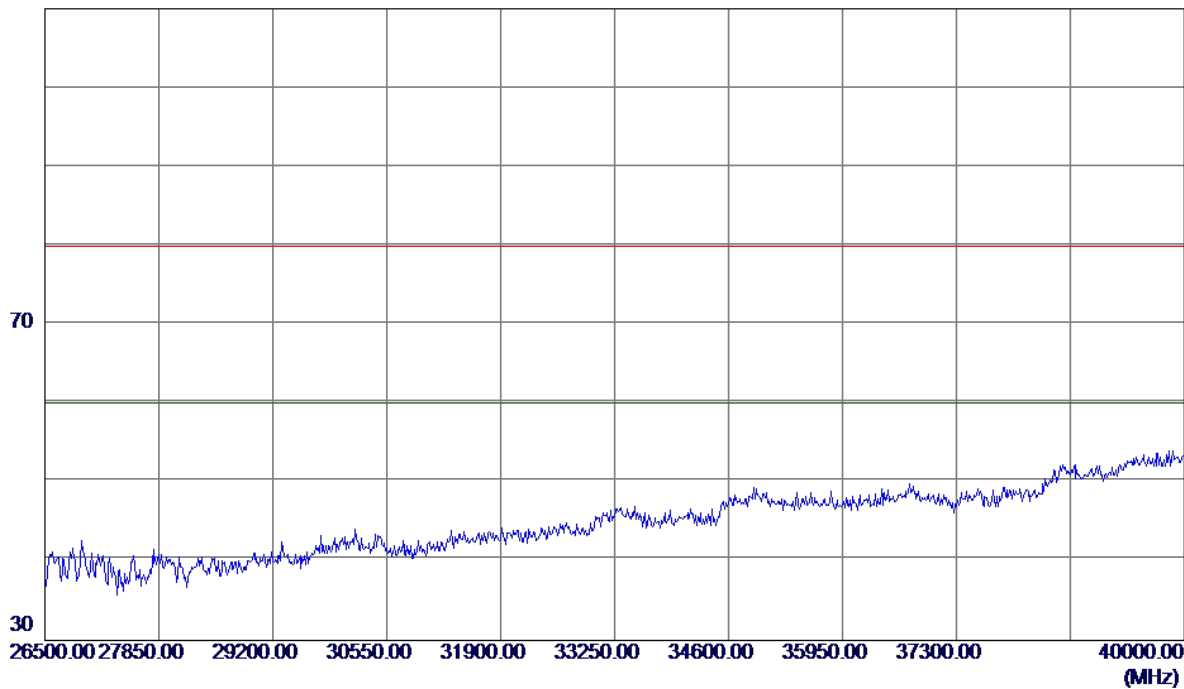


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

125 dBuV/m

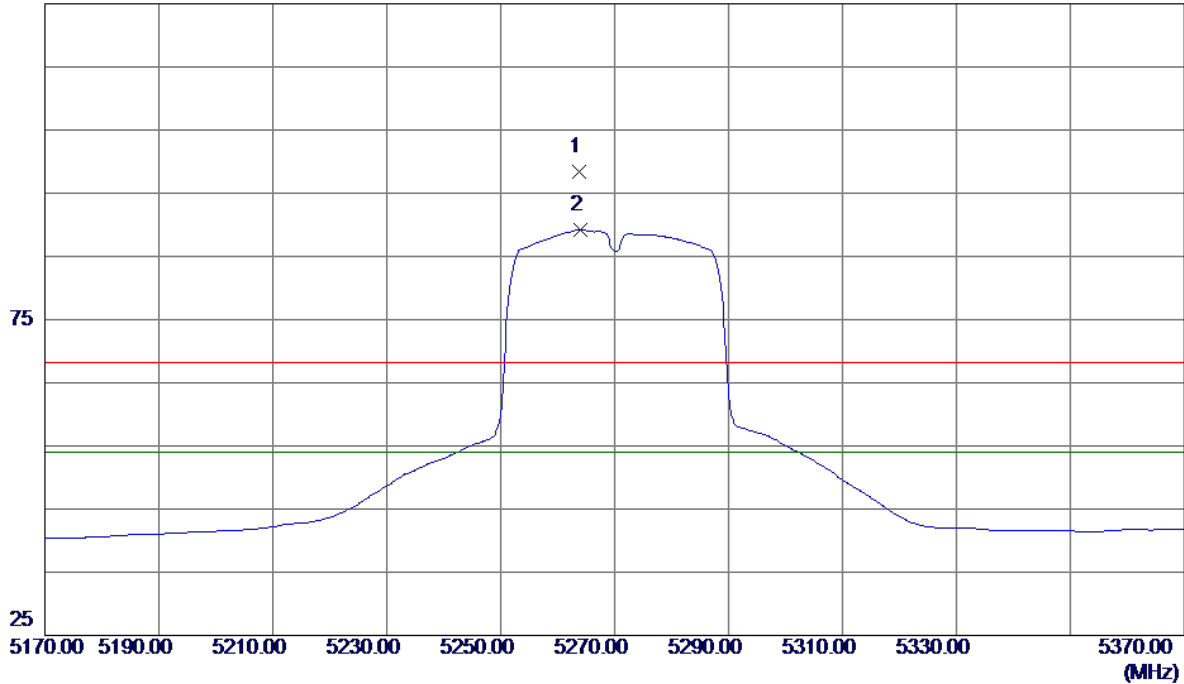


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5263.8000	57.31	41.00	98.31	68.30	30.01	Peak	No Limit
2 *	5264.0000	48.19	41.00	89.19	54.00	35.19	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

110 dBuV/m

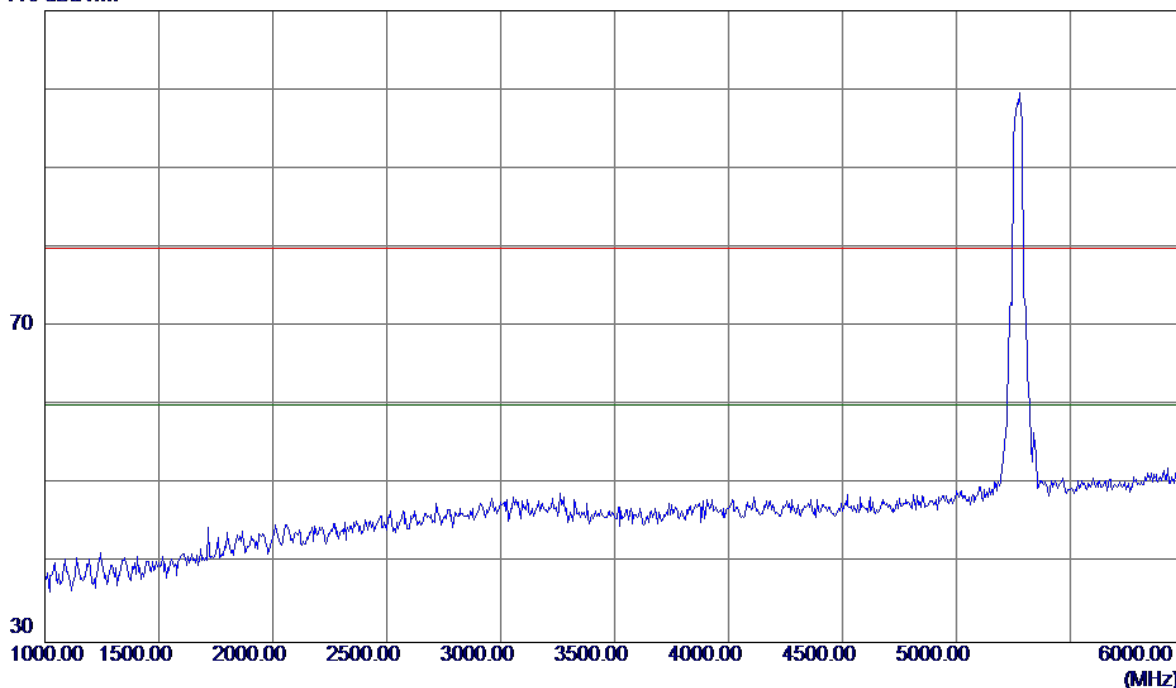


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

110 dBuV/m

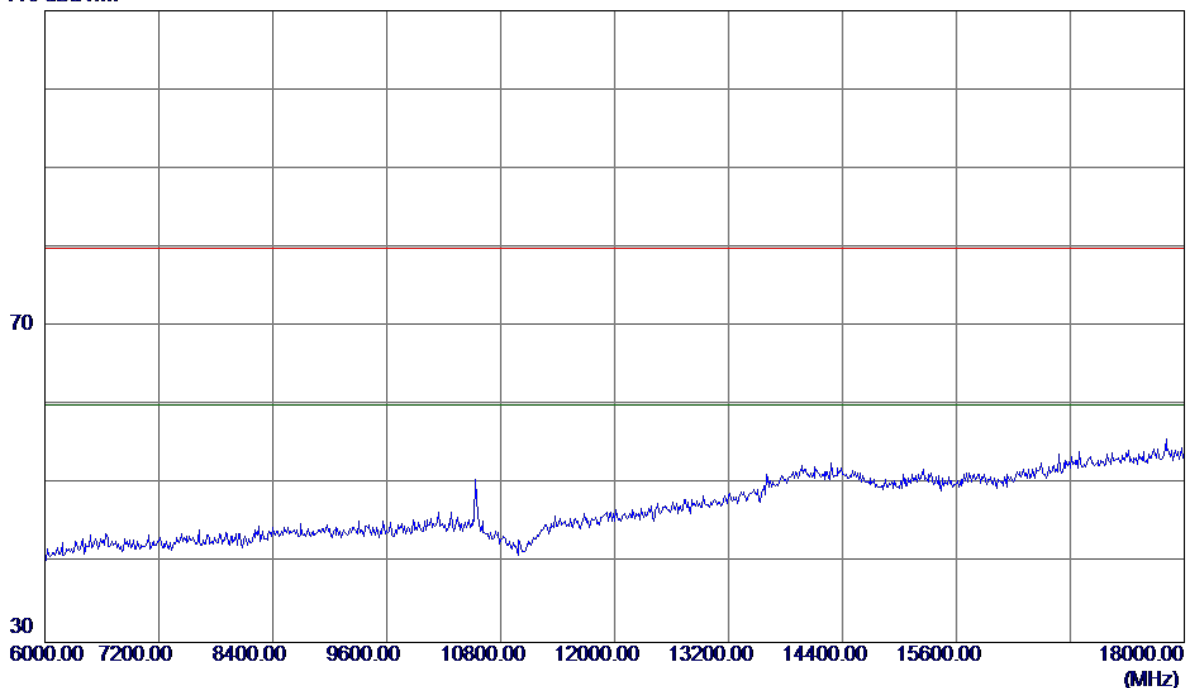


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

110 dBuV/m

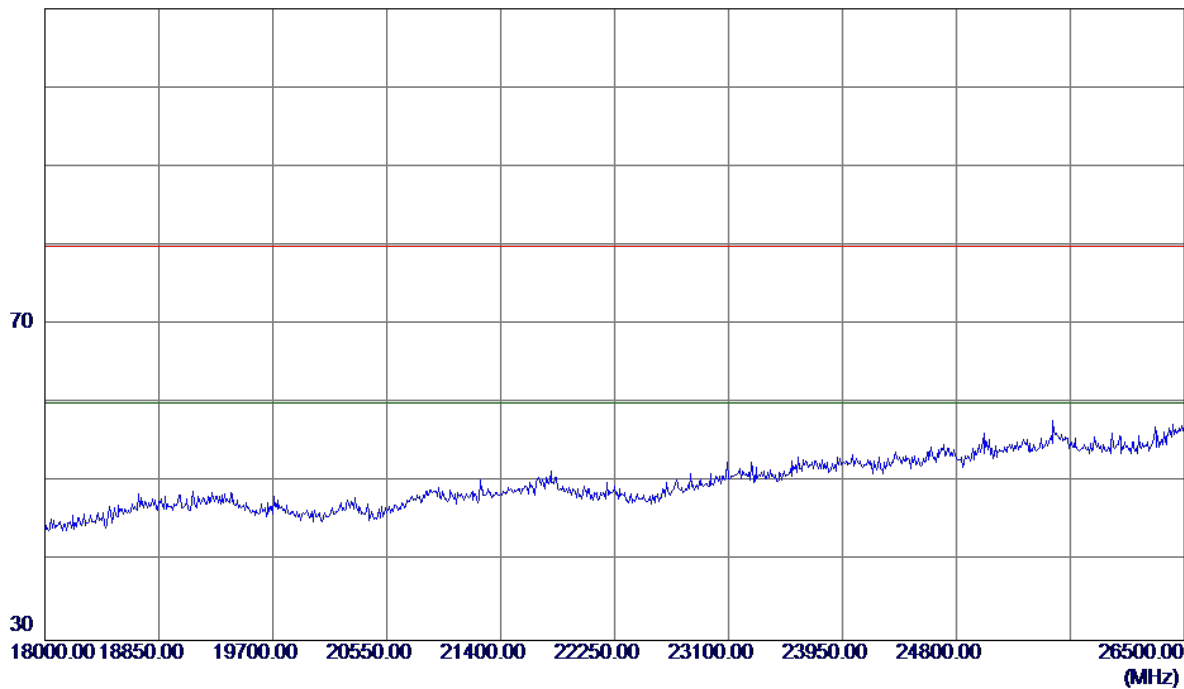


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

110 dBuV/m

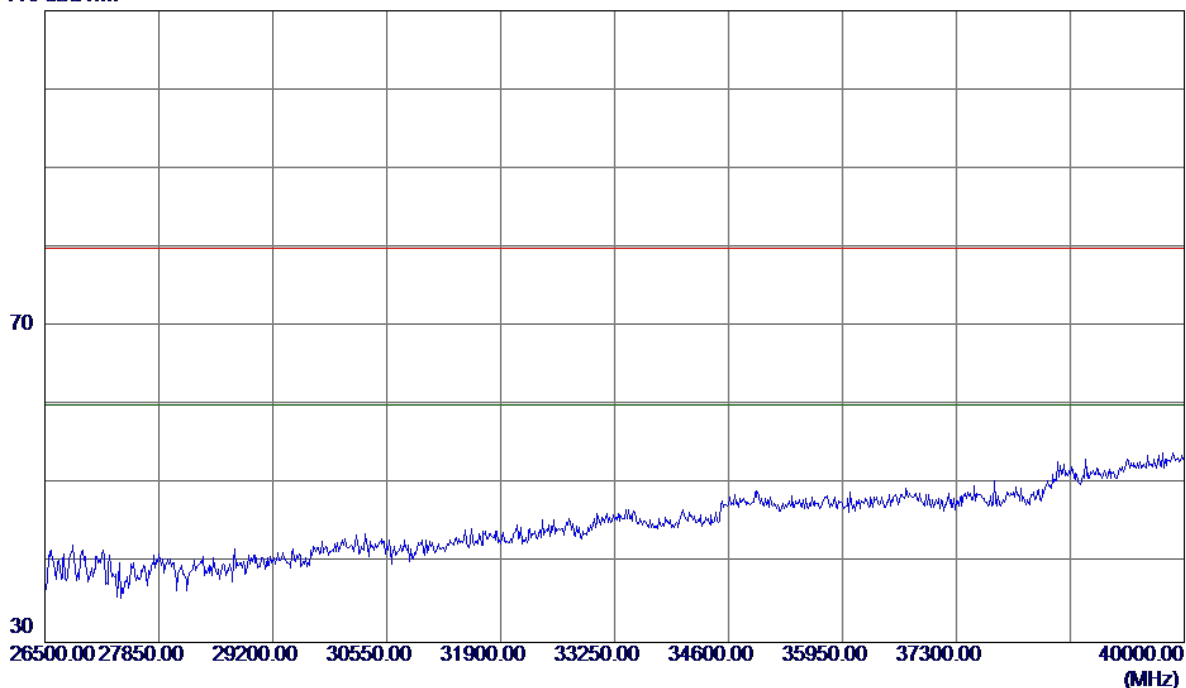


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

125 dBuV/m

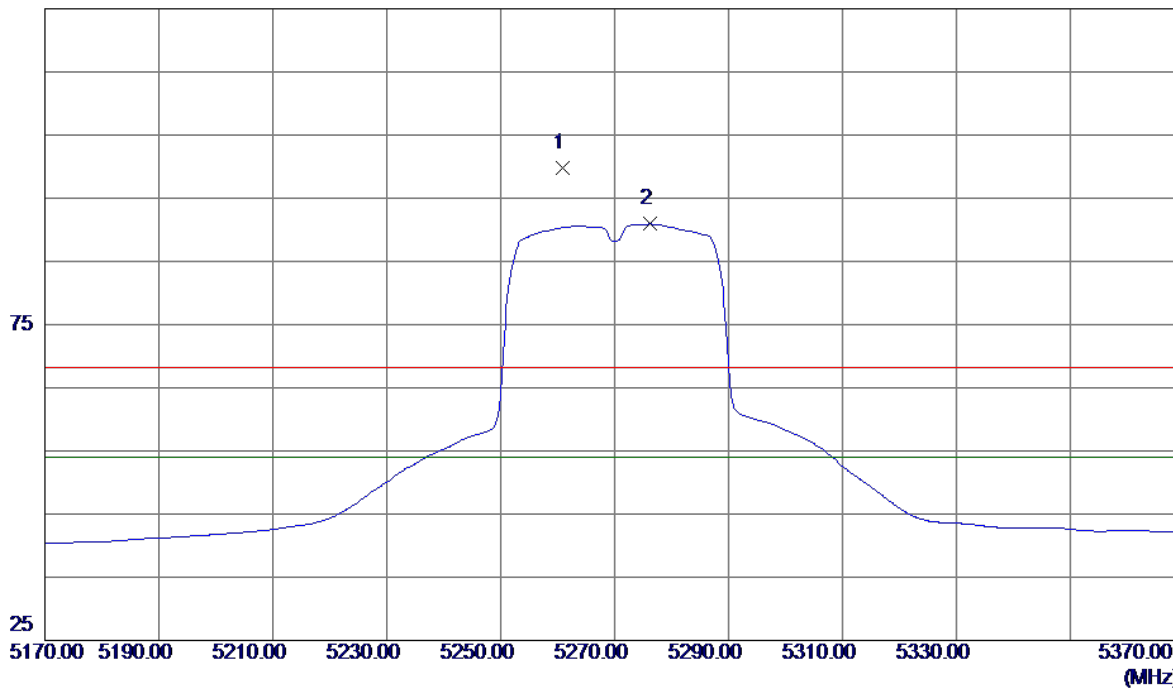


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5260.8000	58.76	40.99	99.75	68.30	31.45	Peak	No Limit
2 *	5276.2000	49.87	41.04	90.91	54.00	36.91	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

110 dBuV/m

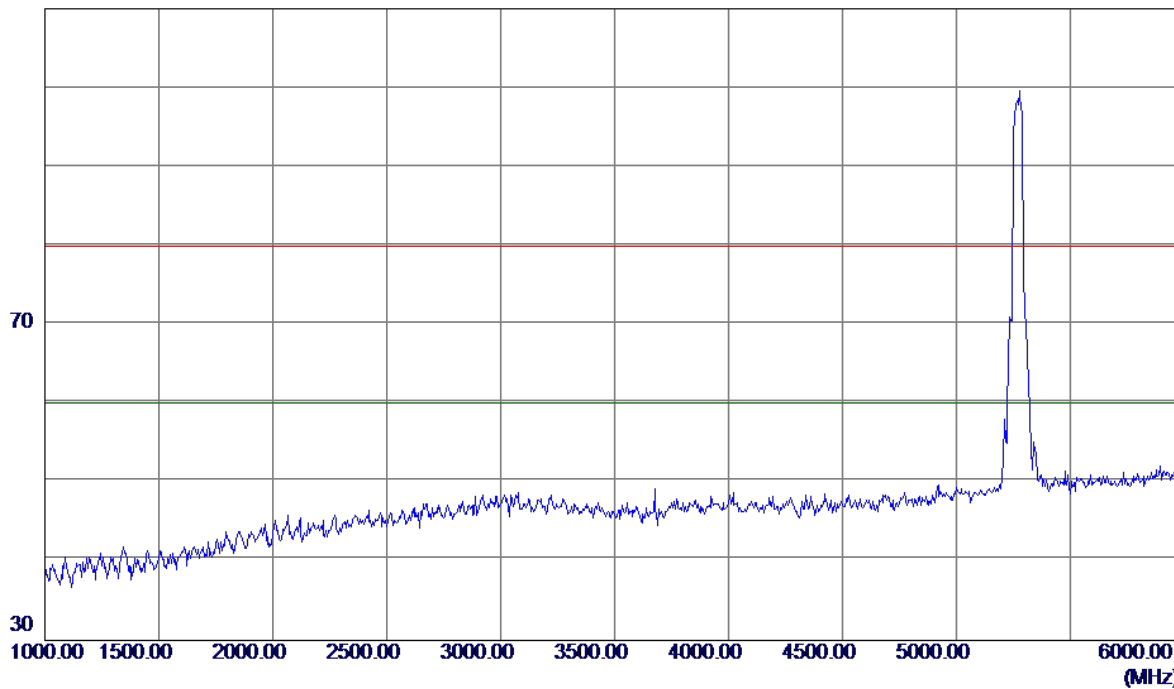


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

110 dBuV/m

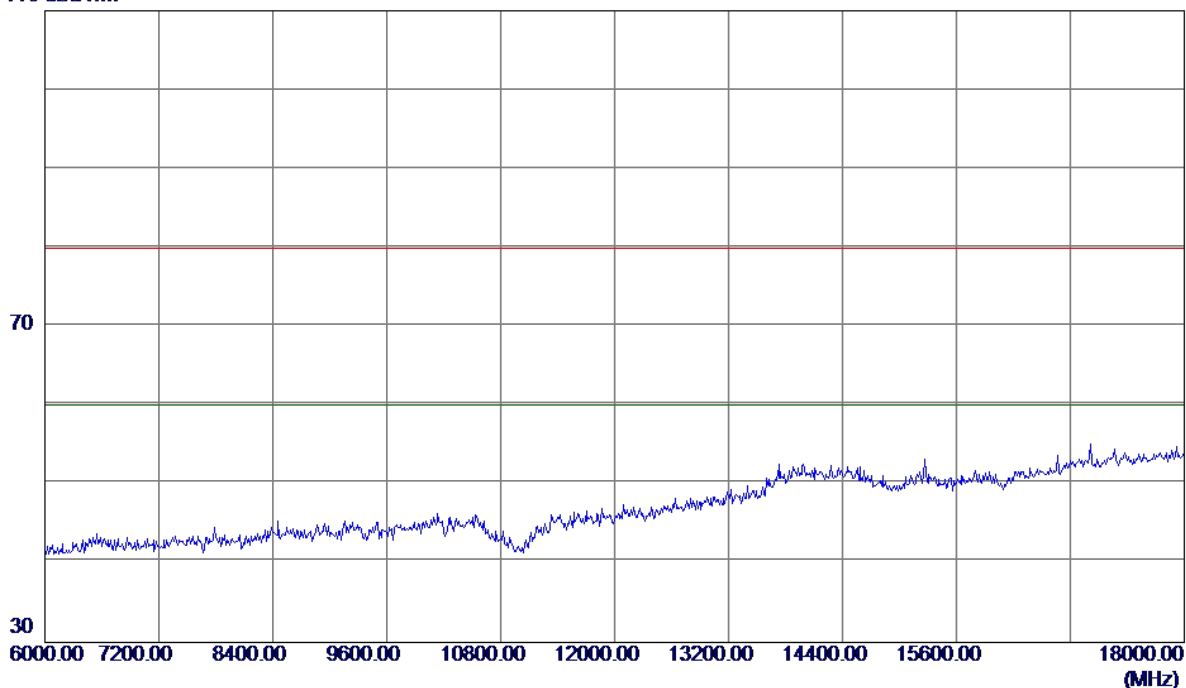


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

110 dBuV/m

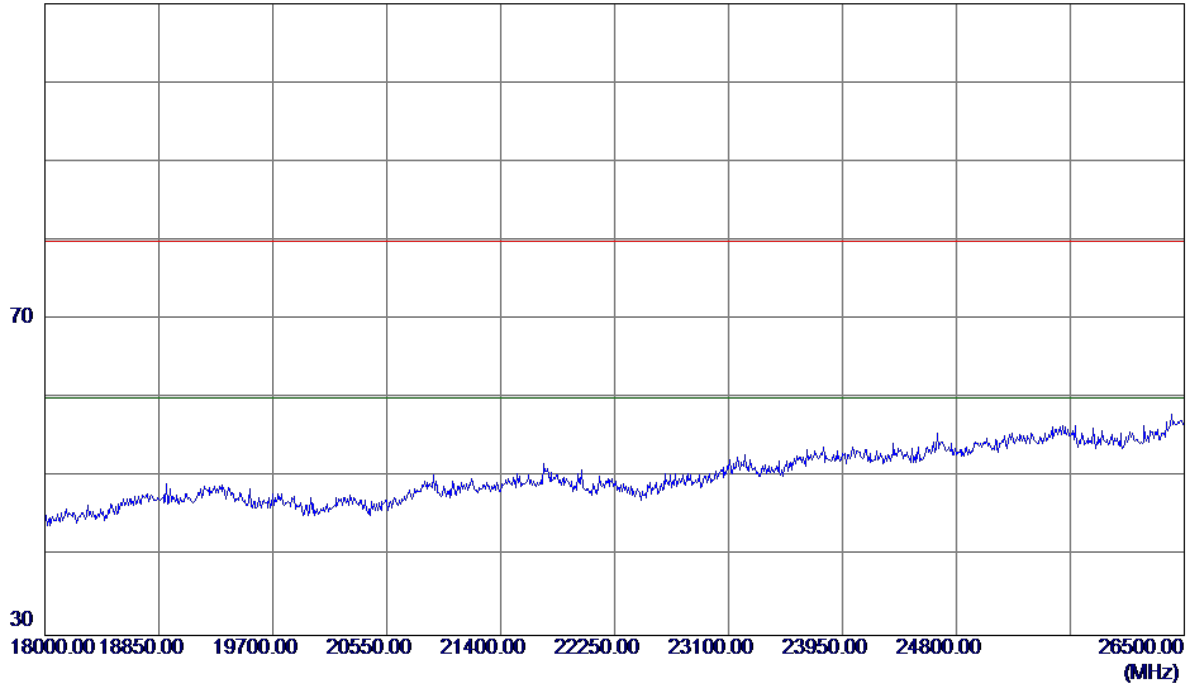


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

110 dBuV/m

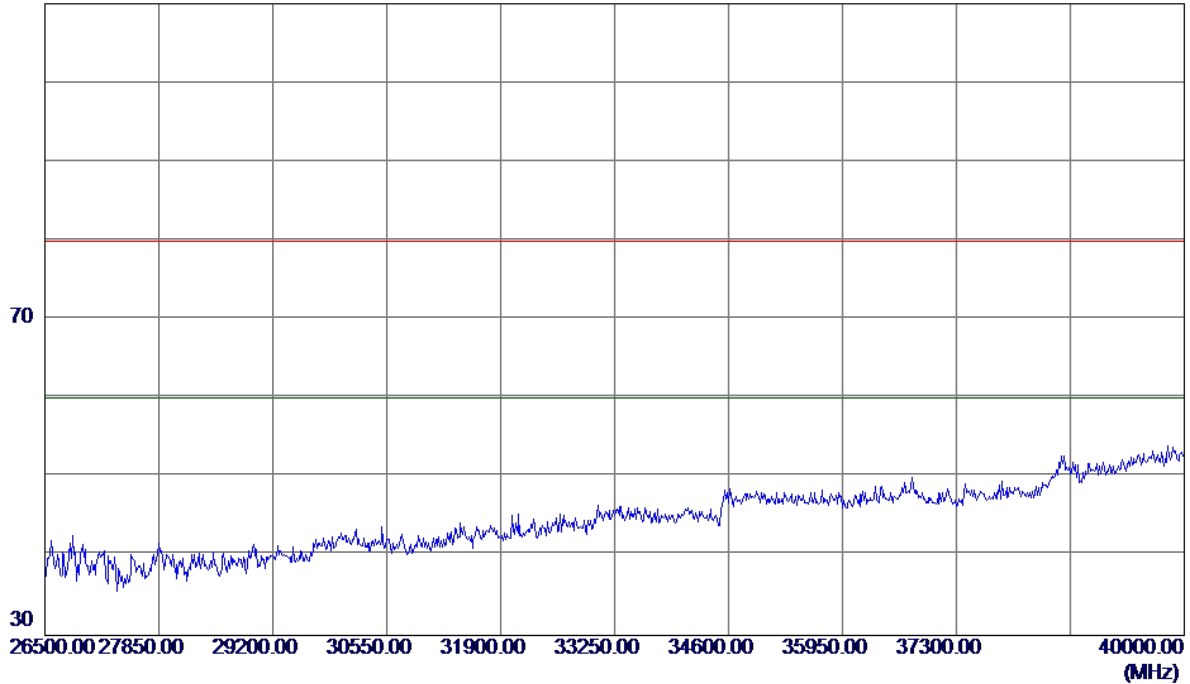


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

125 dBuV/m

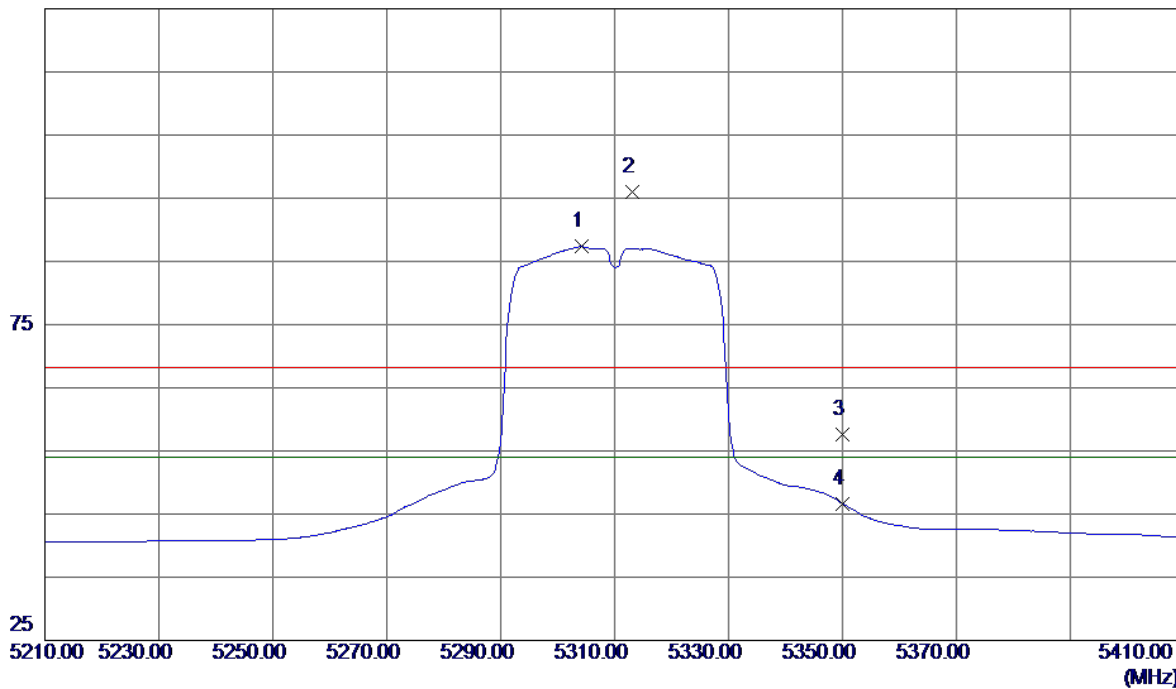


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5304.2000	46.19	41.13	87.32	54.00	33.32	AVG	No Limit
2	5313.2000	54.89	41.16	96.05	68.30	27.75	Peak	No Limit
3	5350.0000	16.24	41.28	57.52	68.30	-10.78	Peak	
4	5350.0000	5.38	41.28	46.66	54.00	-7.34	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

110 dBuV/m

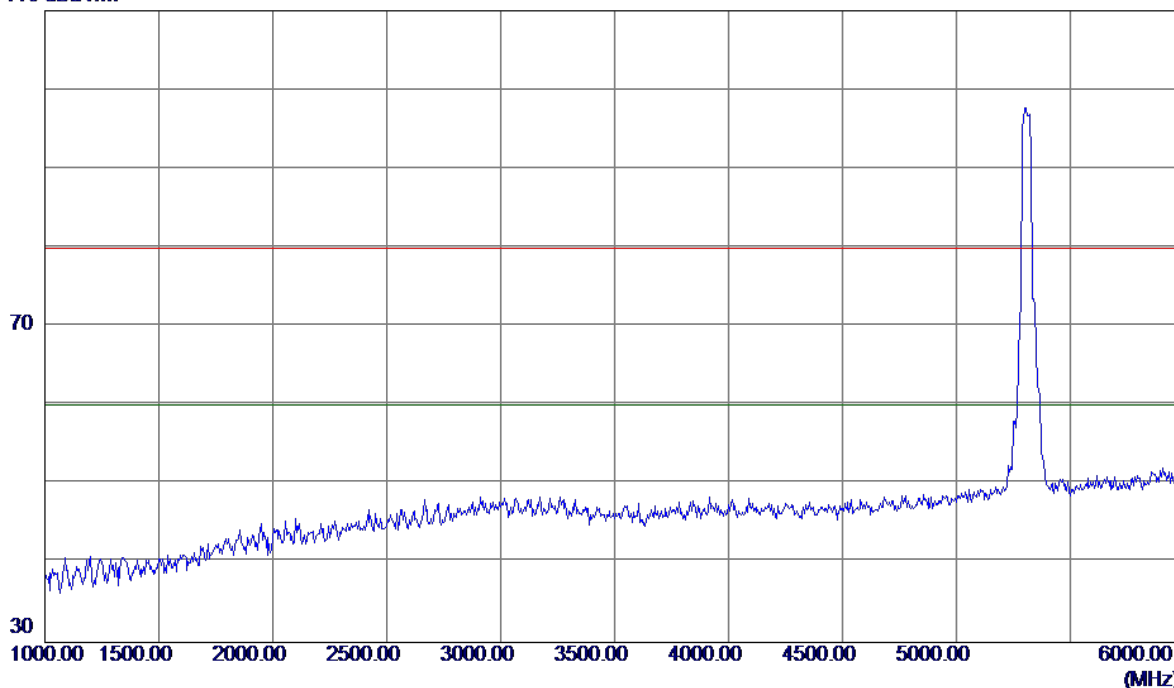


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

110 dBuV/m

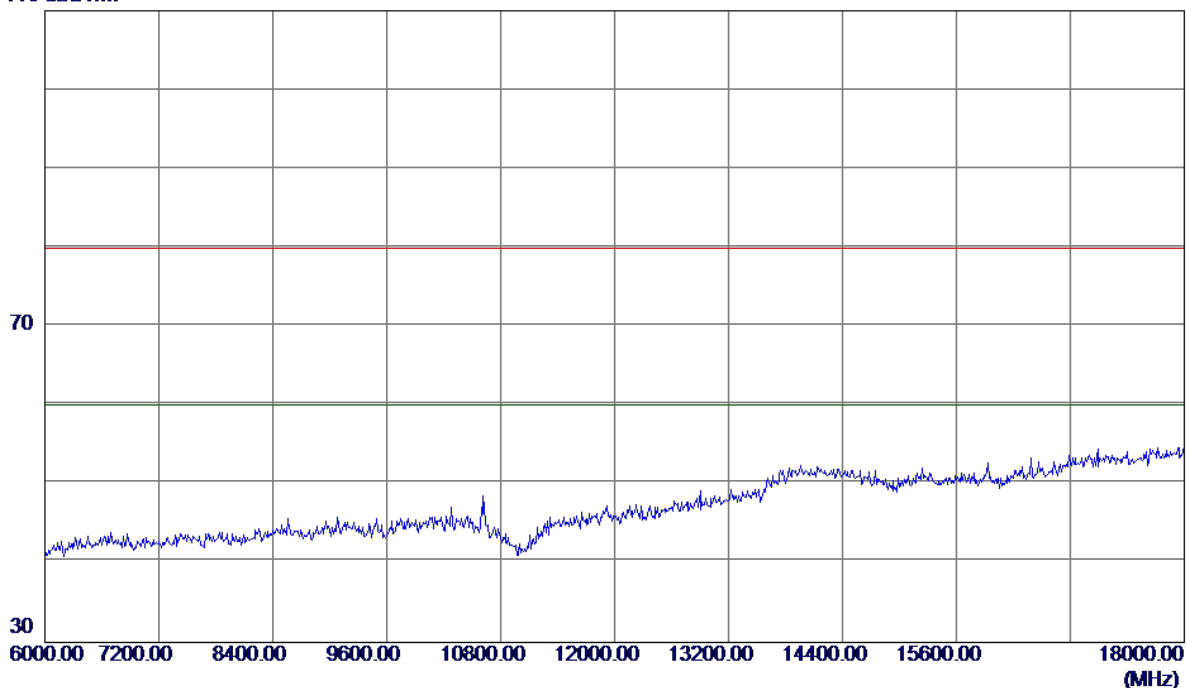


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

110 dBuV/m

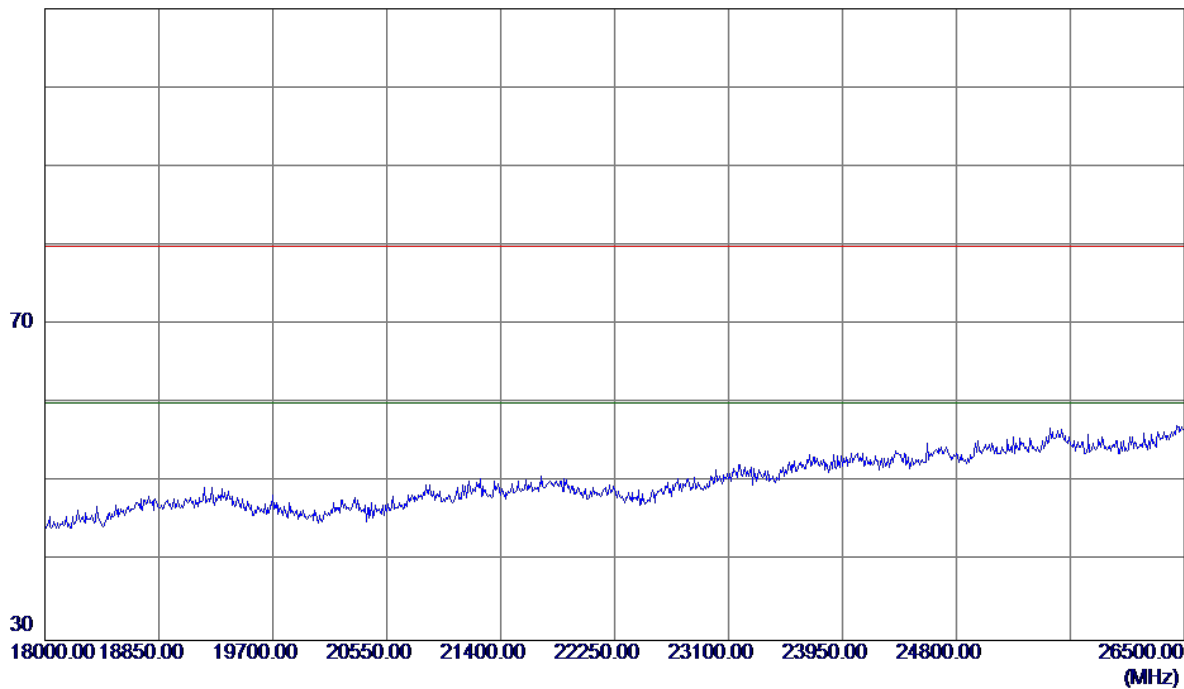


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

110 dBuV/m

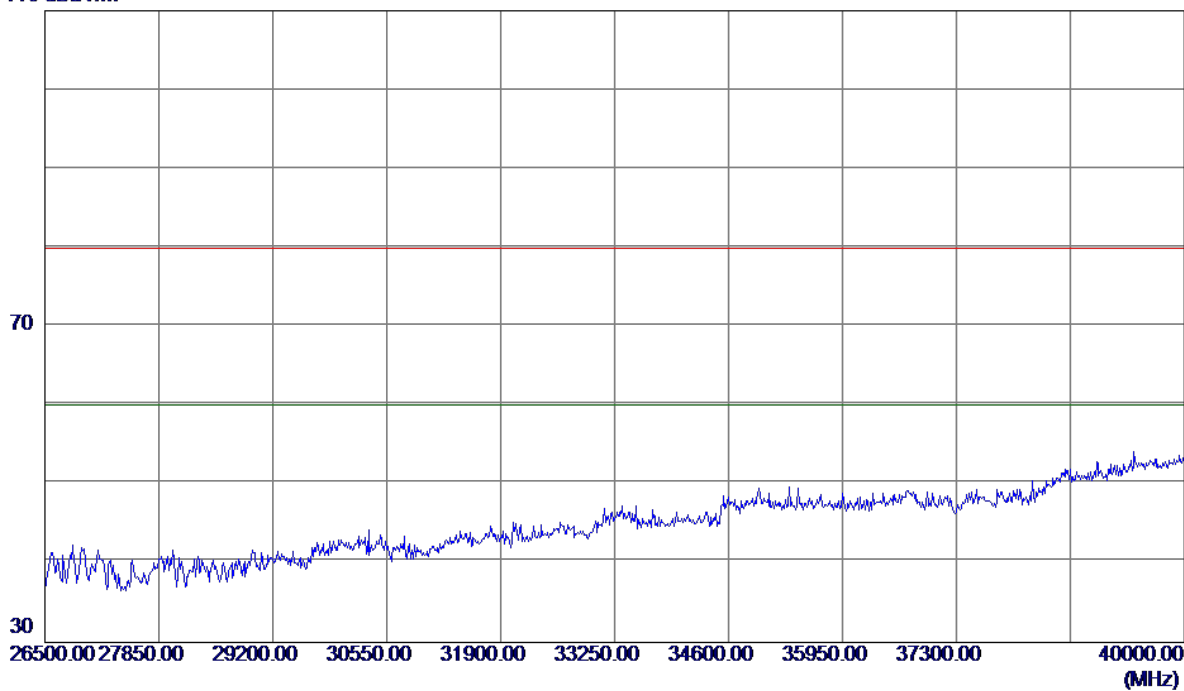


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

125 dBuV/m

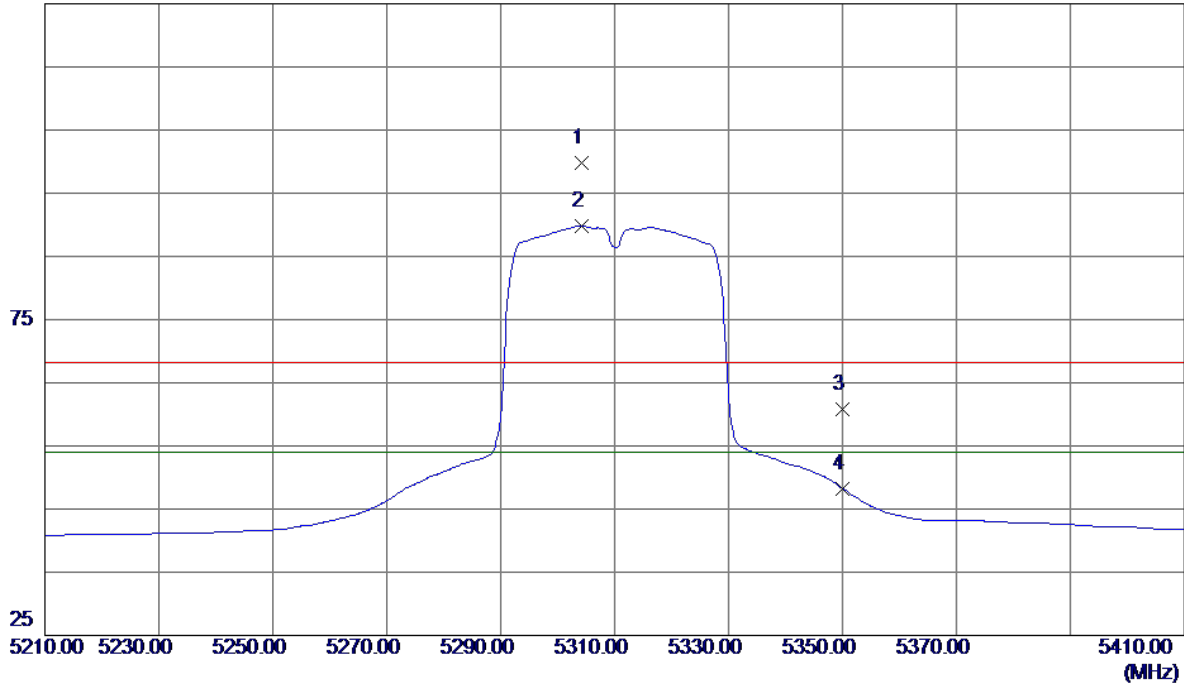


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5304.2000	58.65	41.13	99.78	68.30	31.48	Peak	No Limit
2 *	5304.2000	48.66	41.13	89.79	54.00	35.79	AVG	No Limit
3	5350.0000	19.45	41.28	60.73	68.30	-7.57	Peak	
4	5350.0000	6.97	41.28	48.25	54.00	-5.75	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

110 dBuV/m

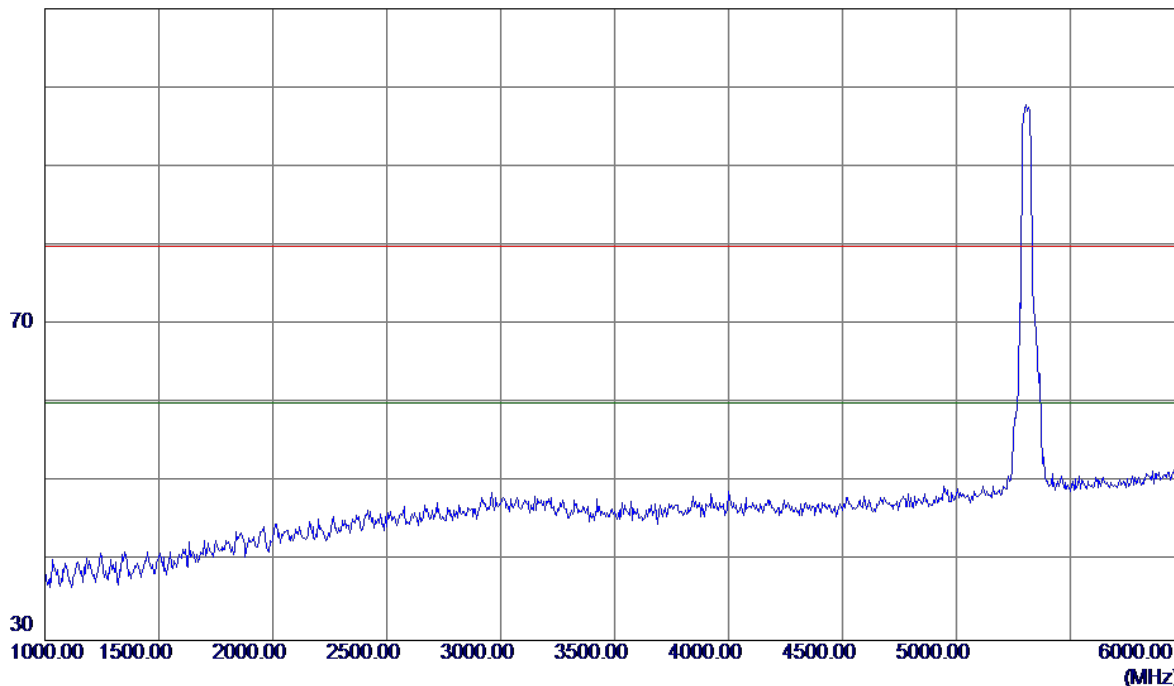


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

110 dBuV/m

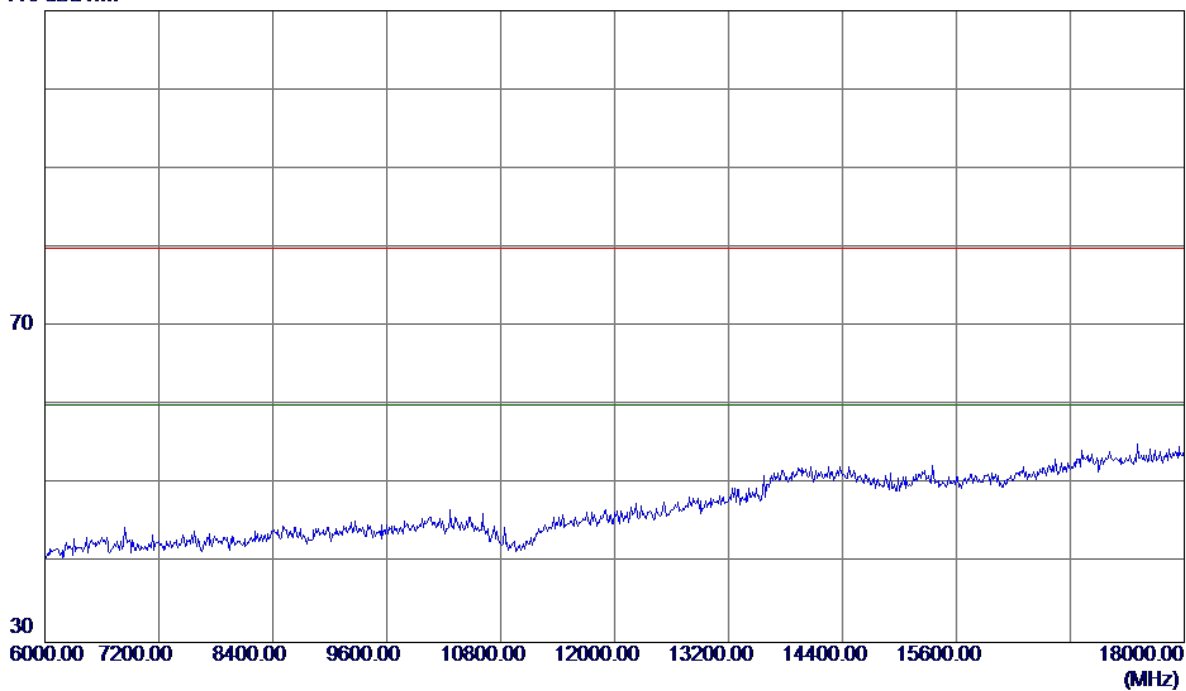


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

110 dBuV/m

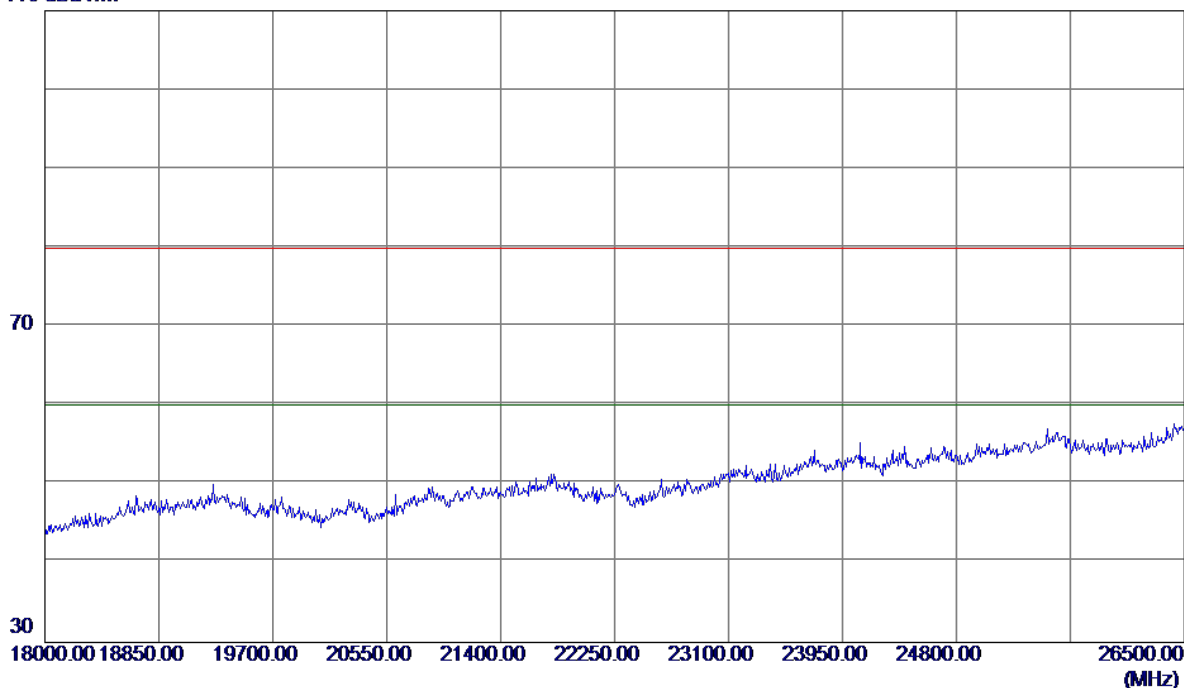


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal


110 dBuV/m

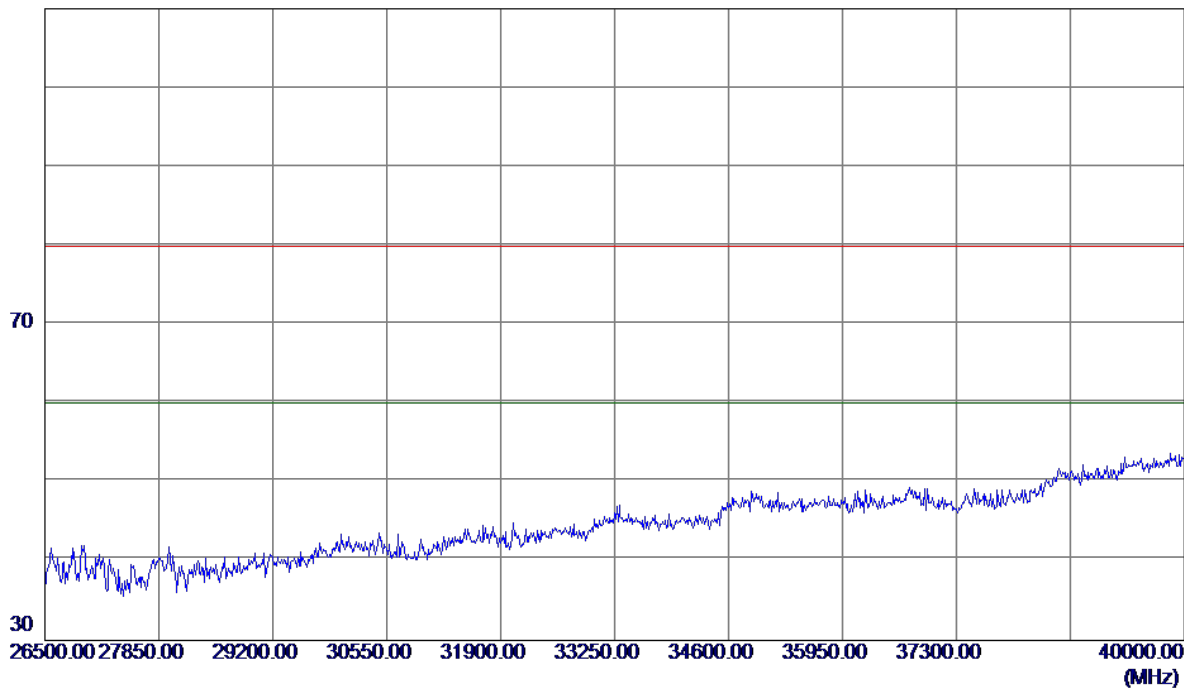

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

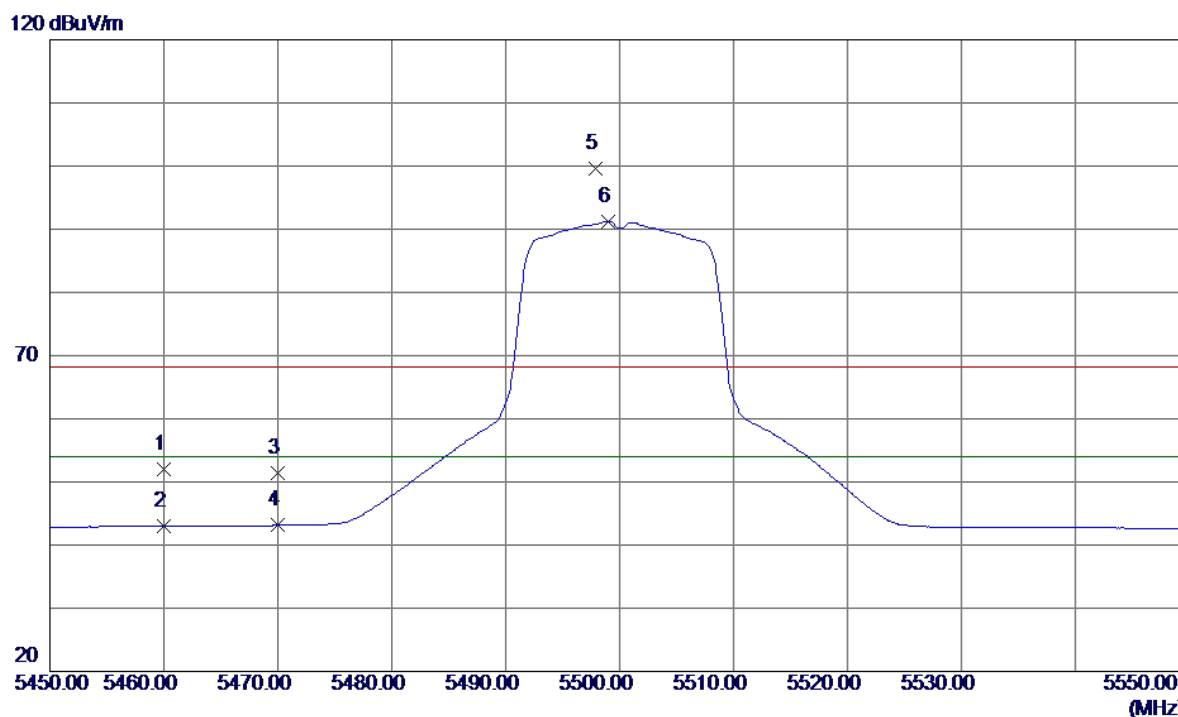


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	10.26	41.65	51.91	68.30	-16.39	Peak	
2	5460.0000	1.31	41.65	42.96	54.00	-11.04	AVG	
3	5470.0000	9.73	41.68	51.41	68.30	-16.89	Peak	
4	5470.0000	1.44	41.68	43.12	54.00	-10.88	AVG	
5	5497.9000	57.84	41.77	99.61	68.30	31.31	Peak	No Limit
6 *	5499.0000	49.45	41.78	91.23	54.00	37.23	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

110 dBuV/m

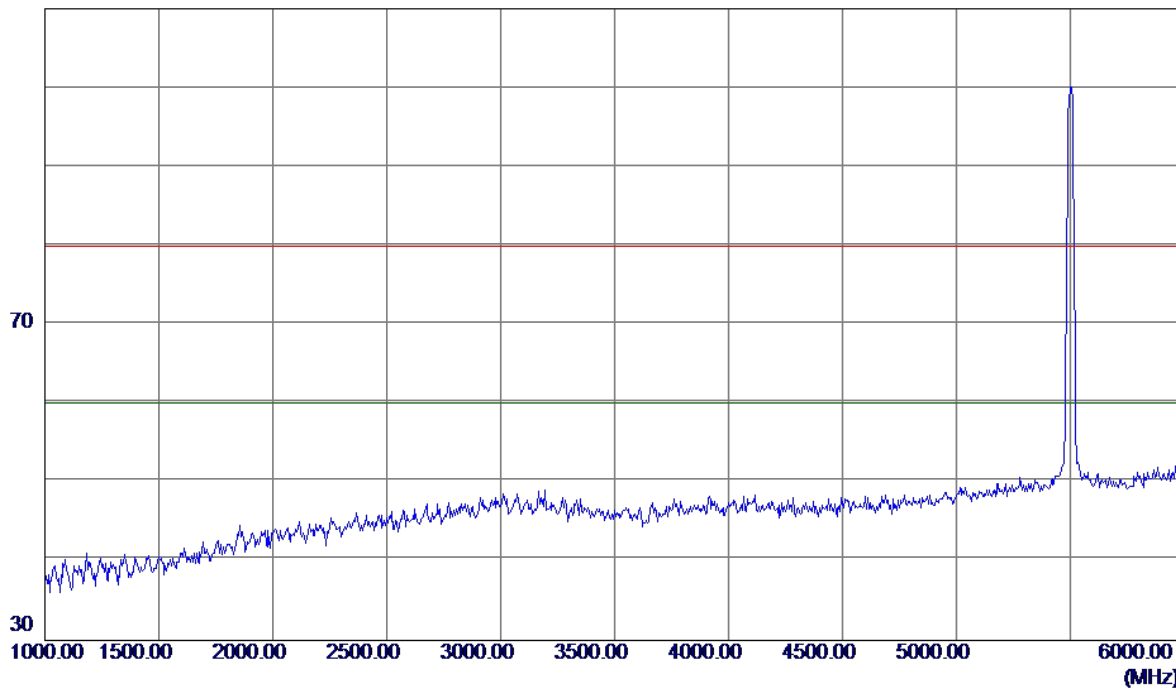


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

110 dBuV/m

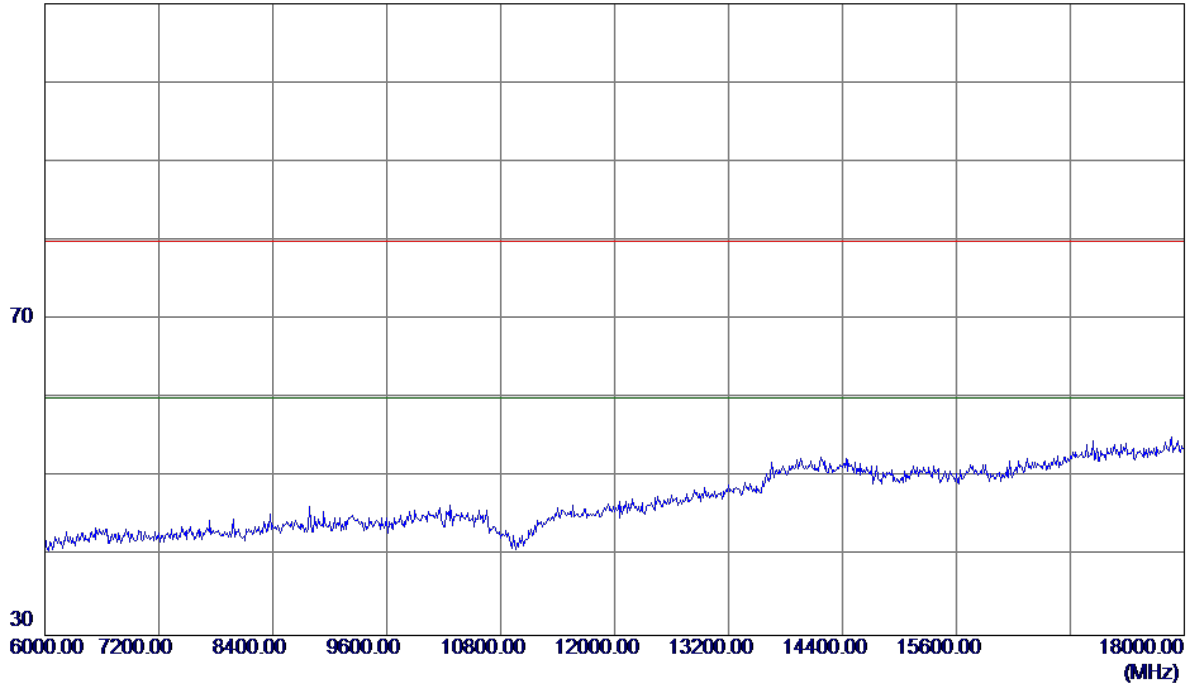


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

110 dBuV/m

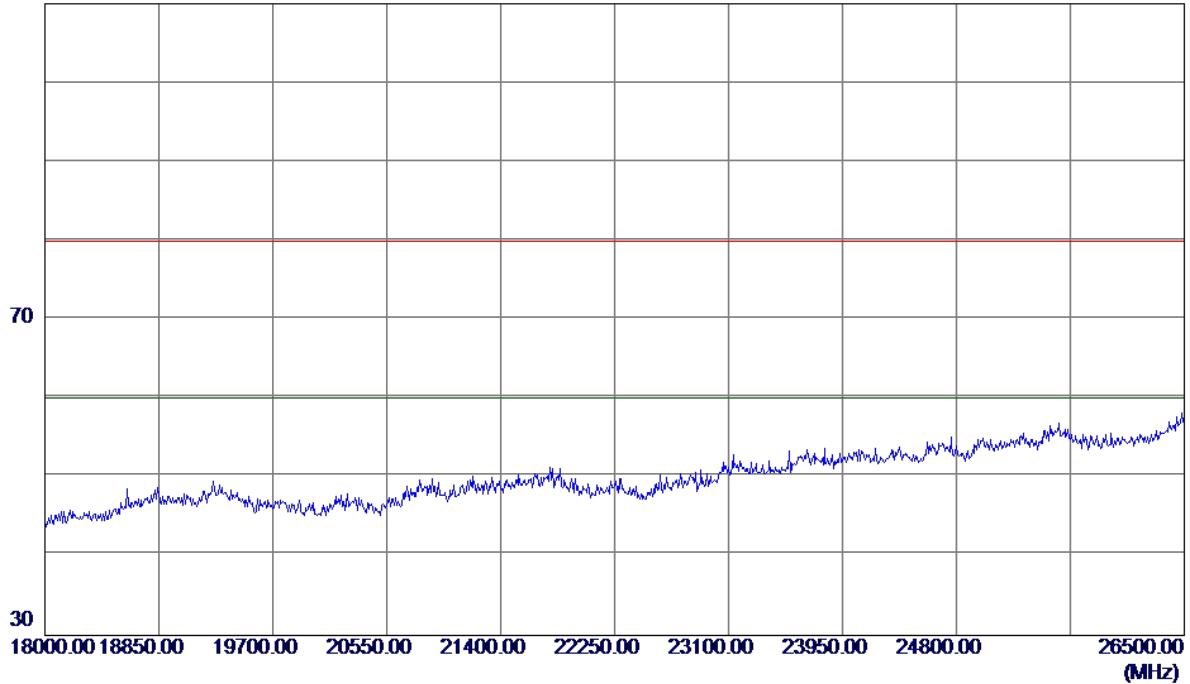


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical


110 dBuV/m

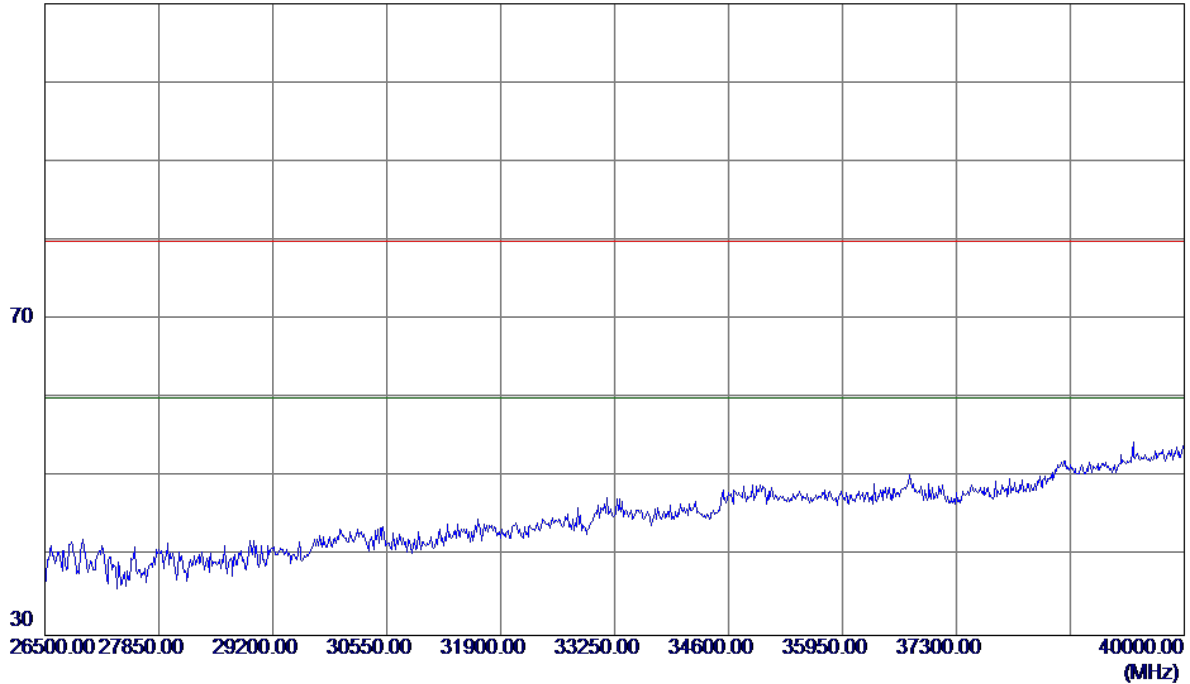

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

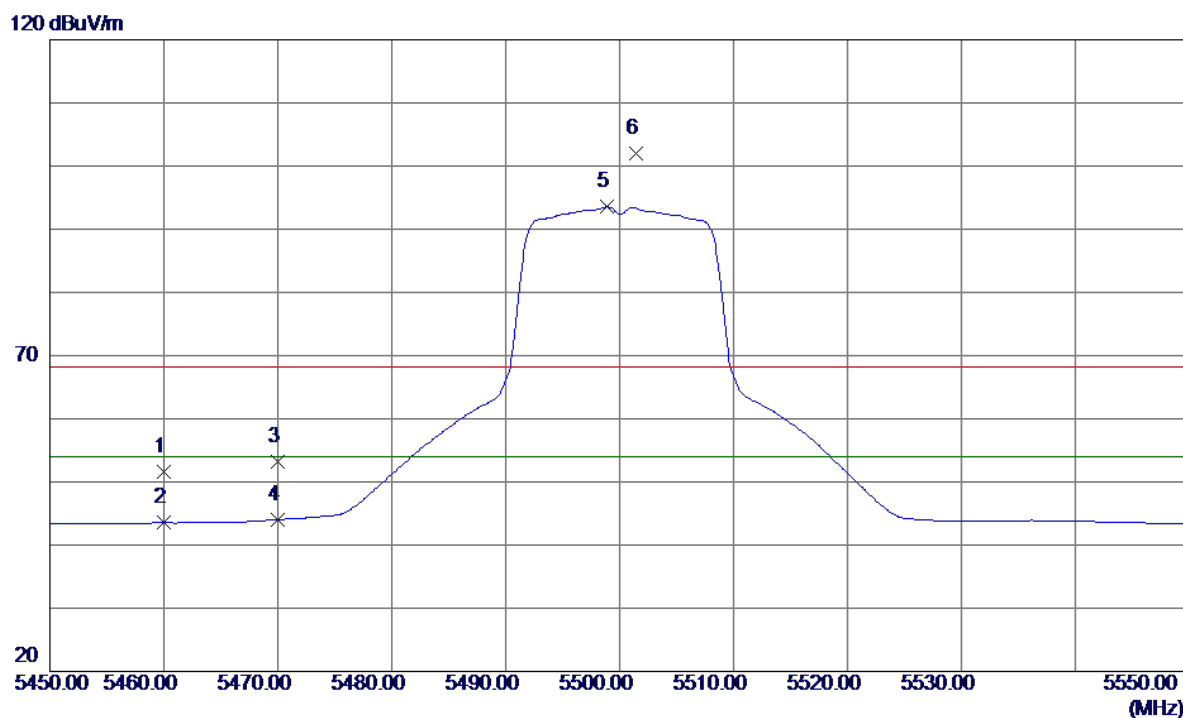


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	9.93	41.65	51.58	68.30	-16.72	Peak	
2	5460.0000	1.89	41.65	43.54	54.00	-10.46	AVG	
3	5470.0000	11.60	41.68	53.28	68.30	-15.02	Peak	
4	5470.0000	2.35	41.68	44.03	54.00	-9.97	AVG	
5 *	5498.9000	51.73	41.78	93.51	54.00	39.51	AVG	No Limit
6	5501.4000	60.28	41.78	102.06	68.30	33.76	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

110 dBuV/m

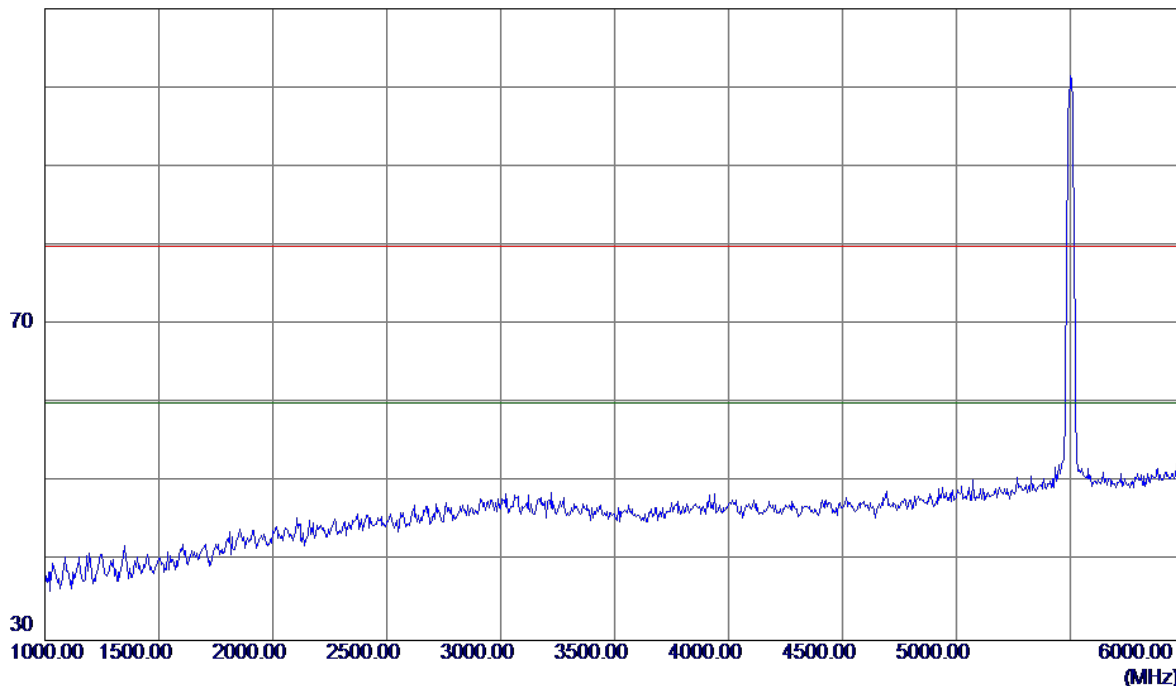


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

110 dBuV/m

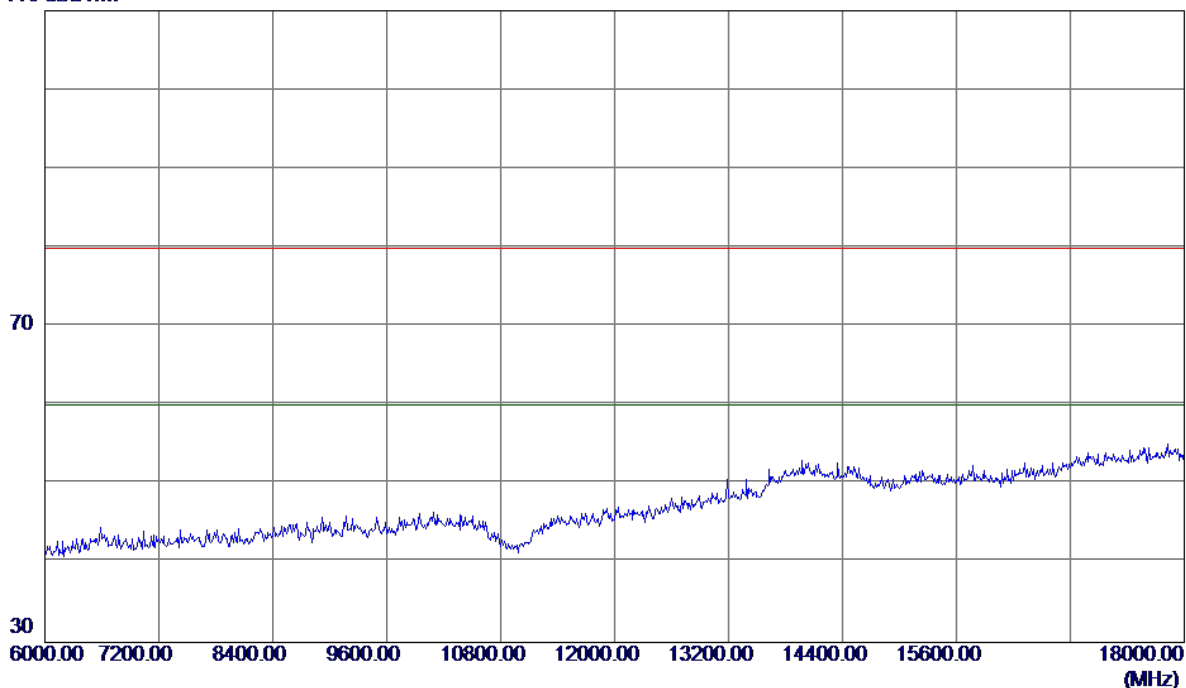

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

110 dBuV/m




No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal


110 dBuV/m

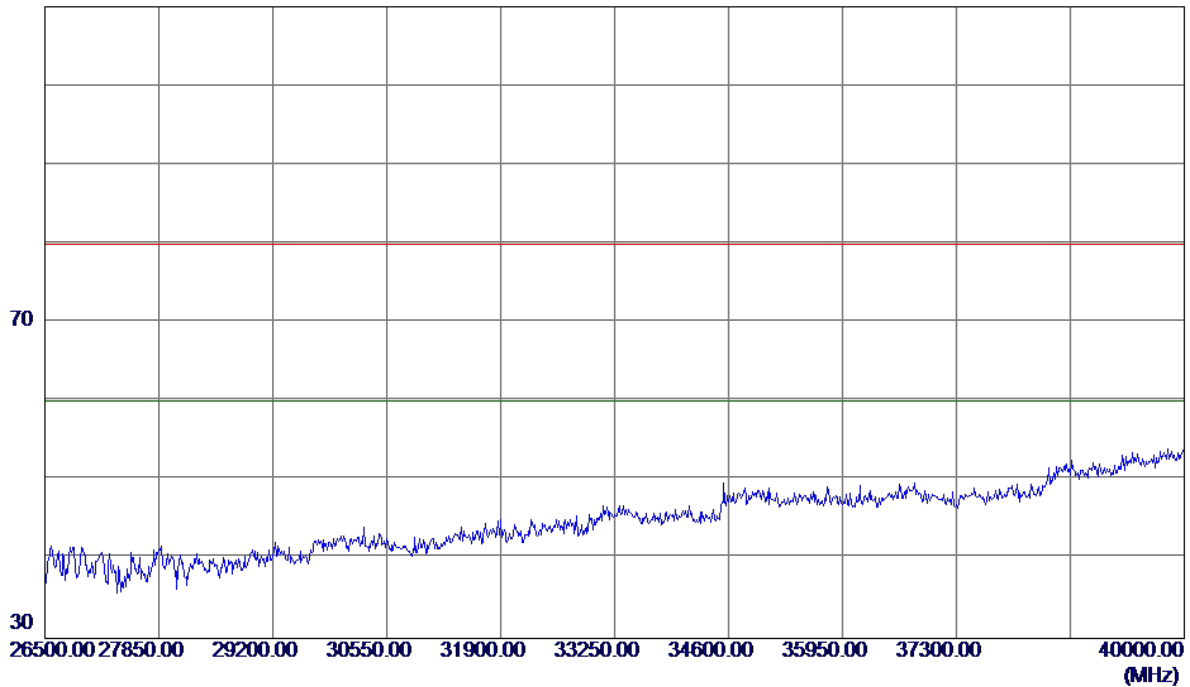

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

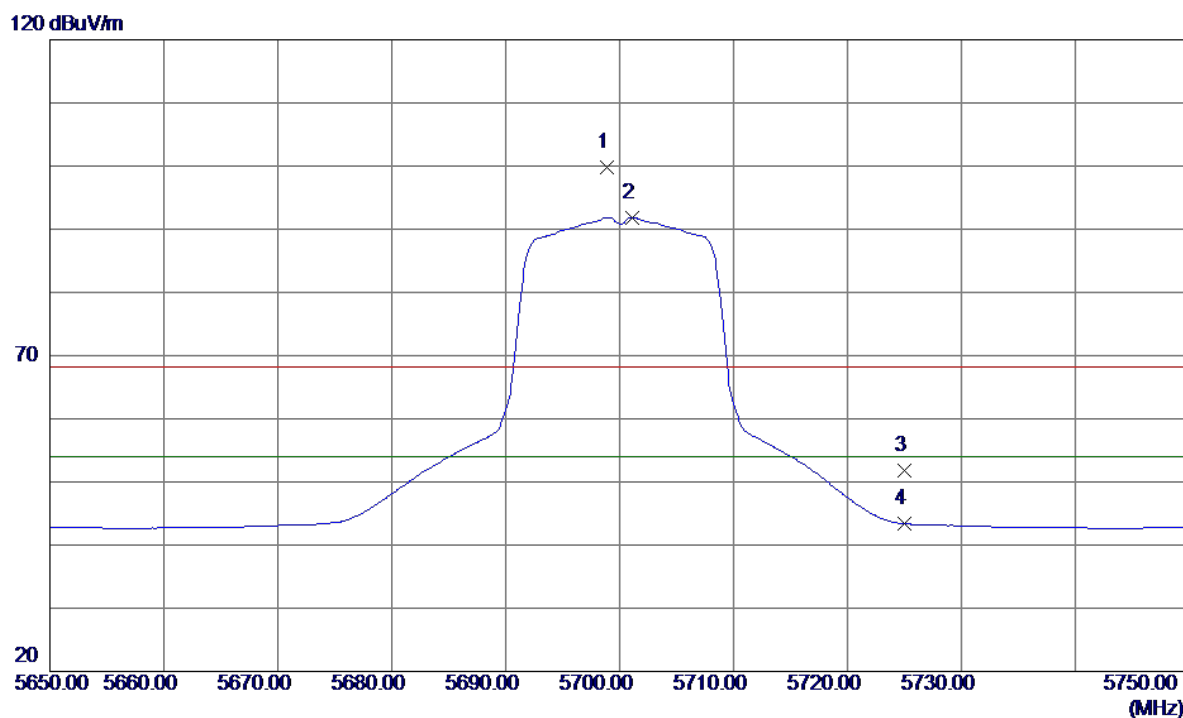


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.9000	57.26	42.49	99.75	68.30	31.45	Peak	No Limit
2 *	5701.1000	49.35	42.50	91.85	54.00	37.85	AVG	No Limit
3	5725.0000	9.17	42.58	51.75	68.30	-16.55	Peak	
4	5725.0000	0.78	42.58	43.36	54.00	-10.64	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

110 dBuV/m

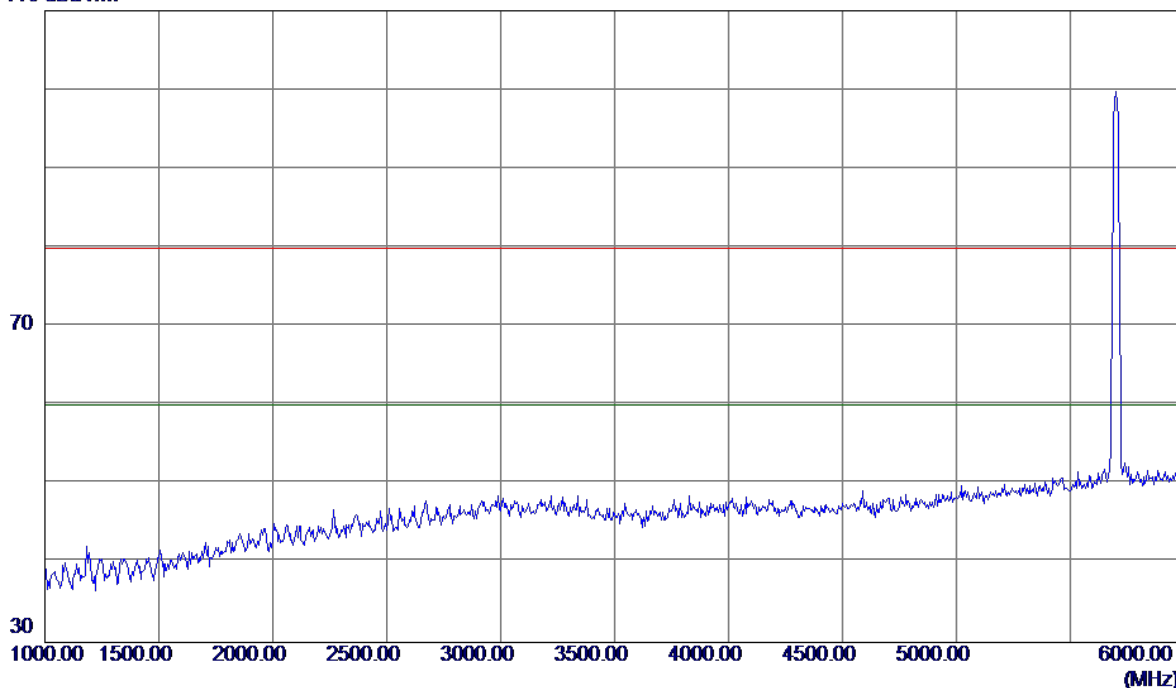


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

110 dBuV/m

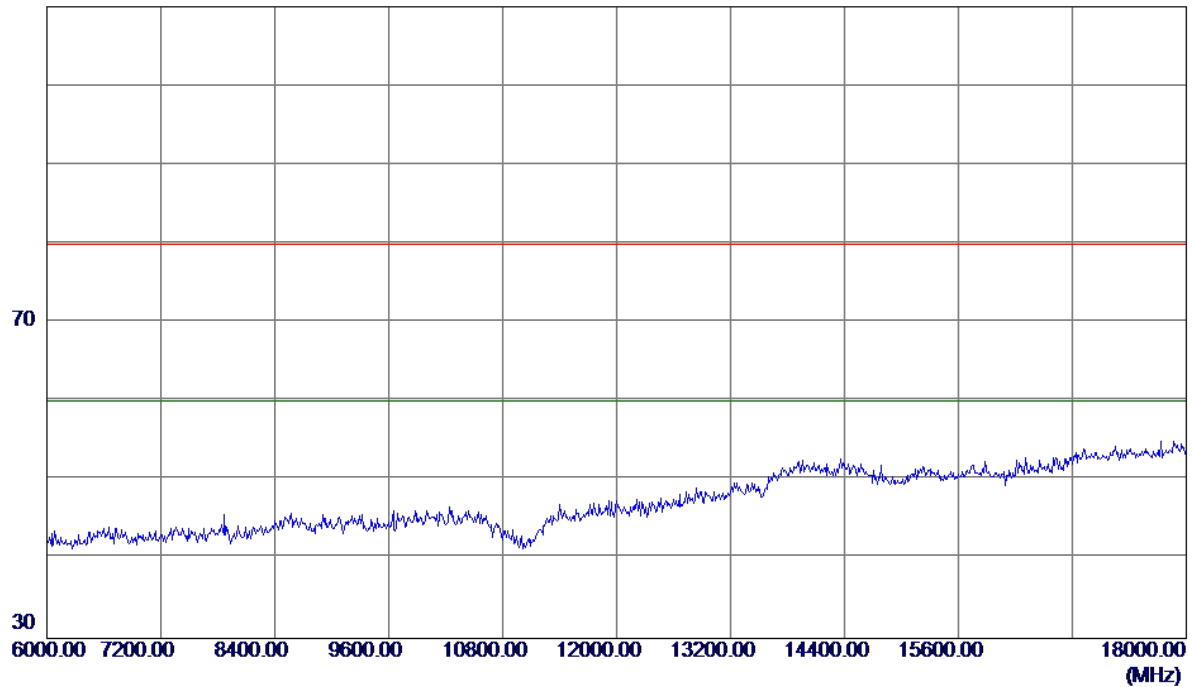


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

110 dBuV/m

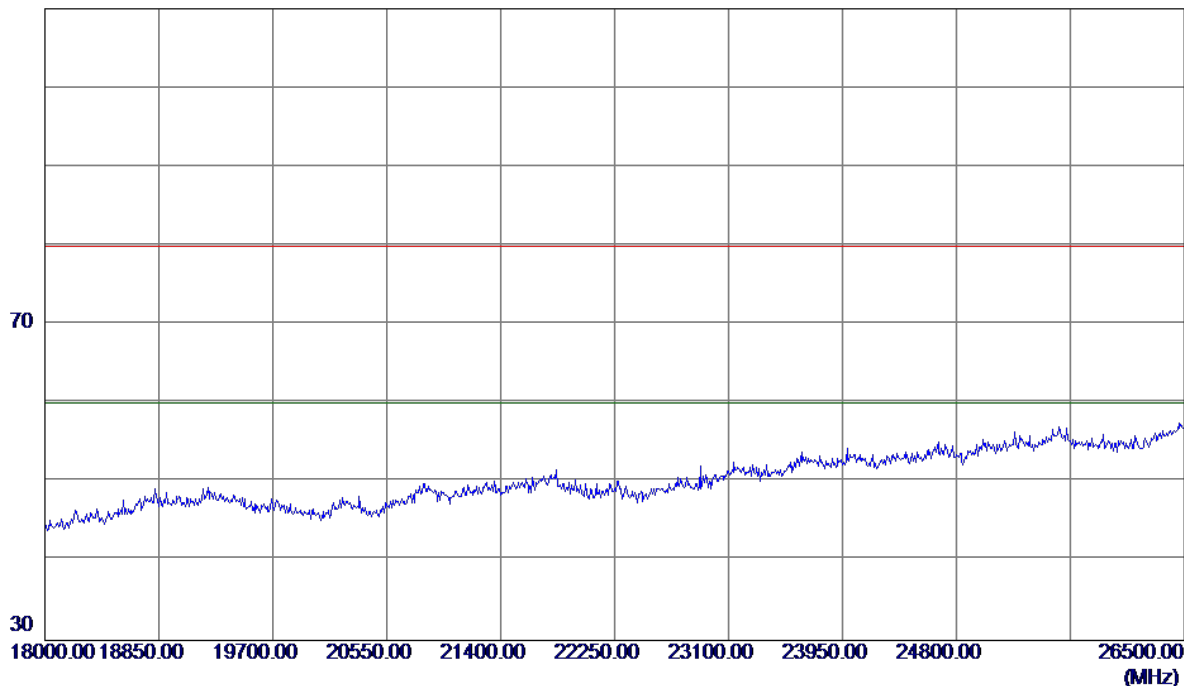


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

110 dBuV/m

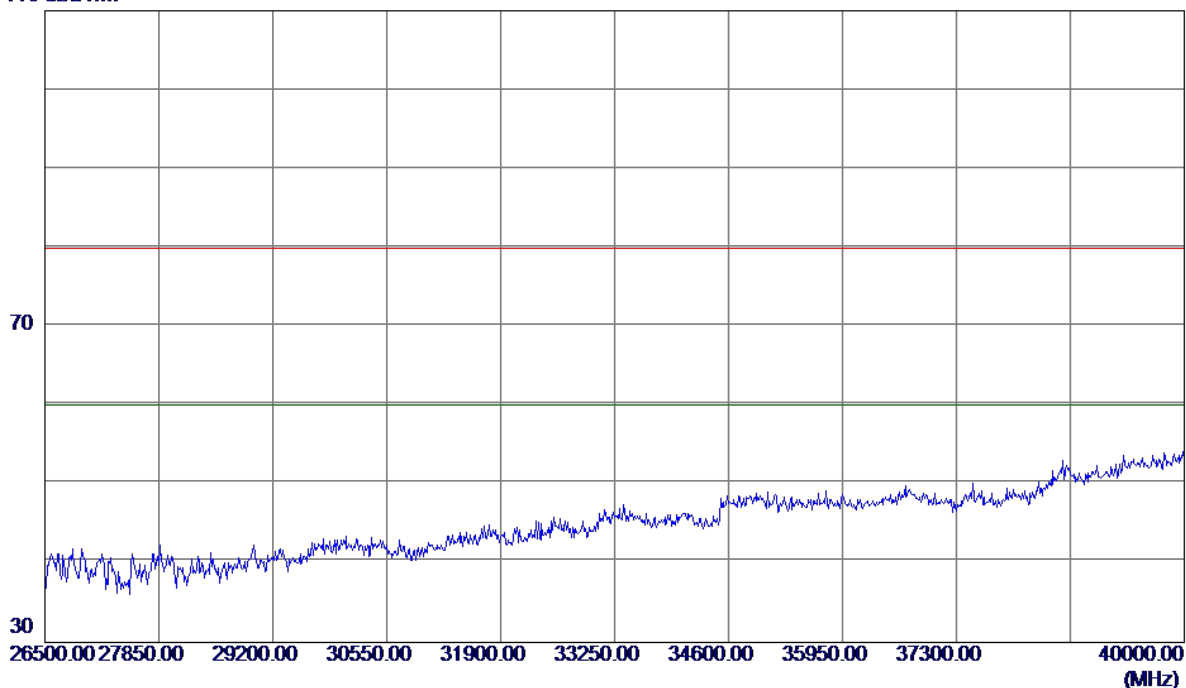


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

120 dBuV/m

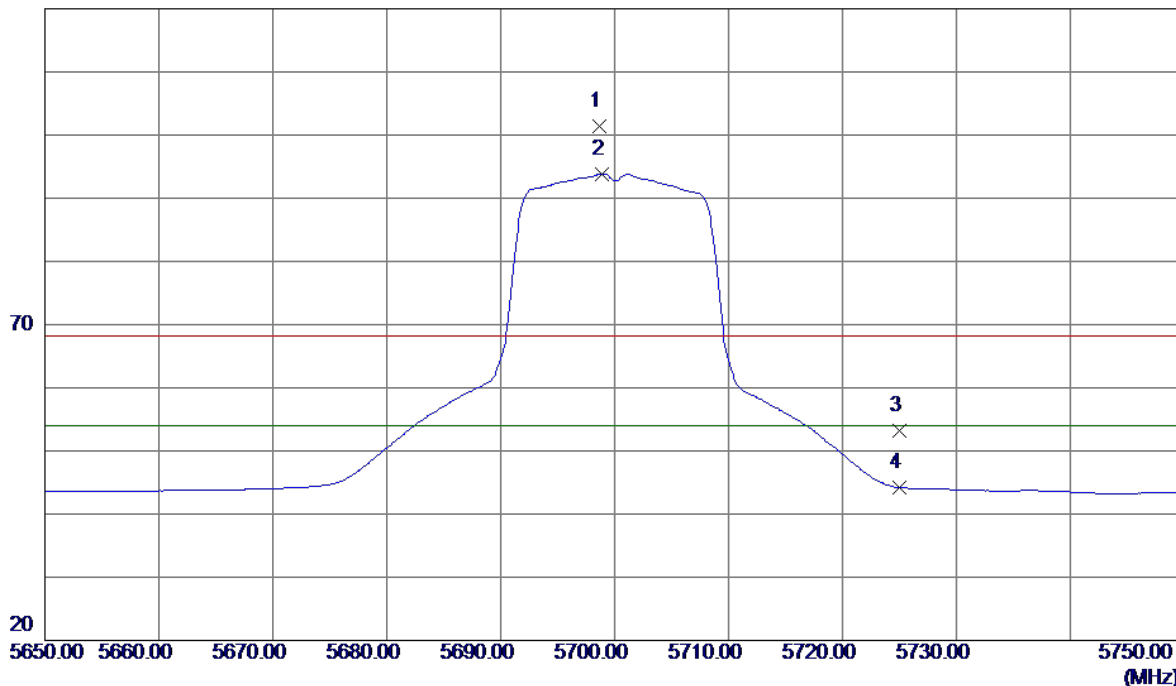

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.7000	59.00	42.49	101.49	68.30	33.19	Peak	No Limit
2 *	5698.9000	51.39	42.49	93.88	54.00	39.88	AVG	No Limit
3	5725.0000	10.70	42.58	53.28	68.30	-15.02	Peak	
4	5725.0000	1.61	42.58	44.19	54.00	-9.81	AVG	