



FCC Test Report

FCC ID: QISCAM-L03

Project No. : 1603C159
Equipment : Smart Phone
Model Name : CAM-L03
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Mar. 14, 2016
Date of Test : Mar. 14, 2016 ~ Mar. 28, 2016
Issued Date : Mar. 30, 2016
Tested by : BTL Inc.

Testing Engineer : 
(Bill Zhang)

Technical Manager : 
(James Chiu)

Authorized Signatory : 
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
ATTACHMENT A - CONDUCTED EMISSION	19
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	44
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	69

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1603C159	Original Issue.	Mar. 30, 2016

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : CAM-L03
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Mar. 14, 2016 ~ Mar. 28, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1603C159) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 2570MHz which exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	CAM-L03
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) BYD Company Limited (2) SHENZHEN HUNTKEY ELECTRIC CO., LTD (3) Dongguan Phitek Electronics Co., Ltd Model: HW-050100U01 #2 Supplied from battery.
Power Rating	#1 I/P: 100V~240V~ 50/60 Hz,0.2A O/P: 5V $\overline{\text{---}}$ 1A #2 DC 3.8V
HW Version	HL4CAMLML
SW Version	CAM-L03C900B006

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

Item	Mfr/Brand	Model.
USB Cable	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC304-DH
	Unirise Communication Technology Co Ltd.	LSA00732
	Shenzhen Luxshare Precision Industry Co.,Ltd.	L99U2017-CS-H
	SHEN ZHEN PANG NGAI INDUSTRIAL CO.,	H09-000577
	CONNREX (SHEN ZHEN) INDUSTRIAL.,LTD.	130-26988
Earphone	GoerTek Inc	CD-U0405-1143
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD.	1293#+3283# 3.5MM-150
	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1532B528000
	MERRY ELECTRONICS CO., LTD.	EMC323-011-01
	GoerTek Inc	HG-04A
Battery	Sunwoda Electronic Co., LTD	HB396481EBC
	SCUD (FUJIAN) Electronics Co., Ltd	
	Desay Battery Co., Ltd.	

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Mode 1

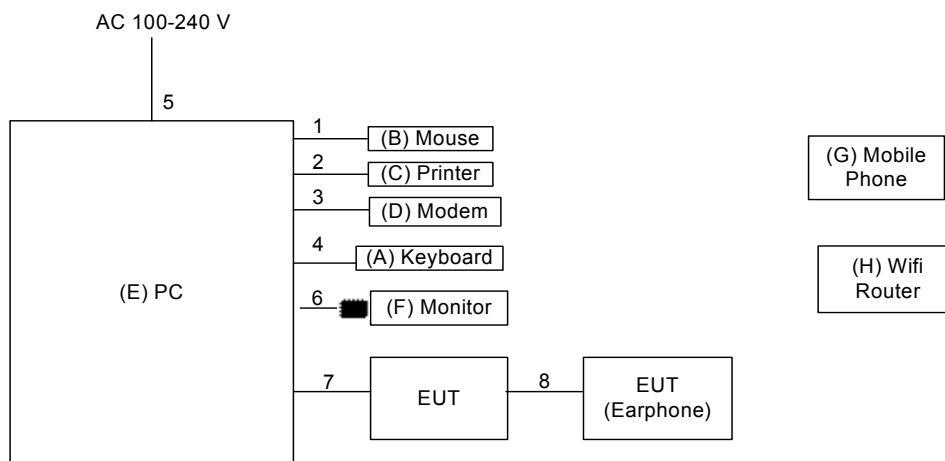

Ground plane
Remote System

■ Ferrite core

Mode 2-6

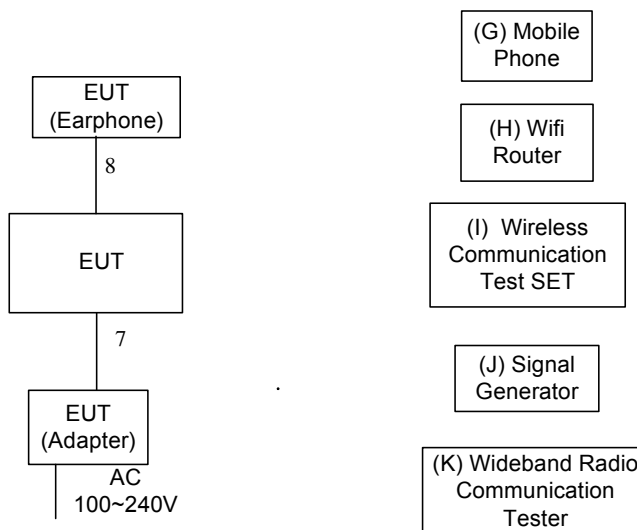

Ground plane
Remote System

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071 T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	Dell	DCSM 745	DOC	G7K832X
F	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6 AG-1WNS
G	Mobile phone	samsung	SGH-1747	A3LSGH1747	R31C208VLDB
H	Router	TP-LINK	TL-WR1041N	DOC	N/A
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183
J	Signal Generator	Agilent	E4438C	N/A	MY49071316
K	Wideband Radio Communication Tester	RS	CMW500	N/A	122125

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

Note:

(1) For detachable type I/O cable should be specified the length m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

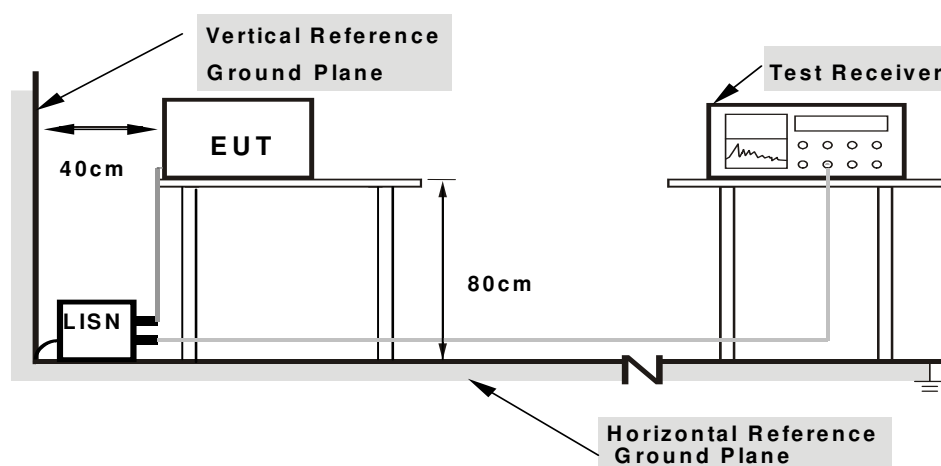

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 24°C Relative Humidity: 60%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

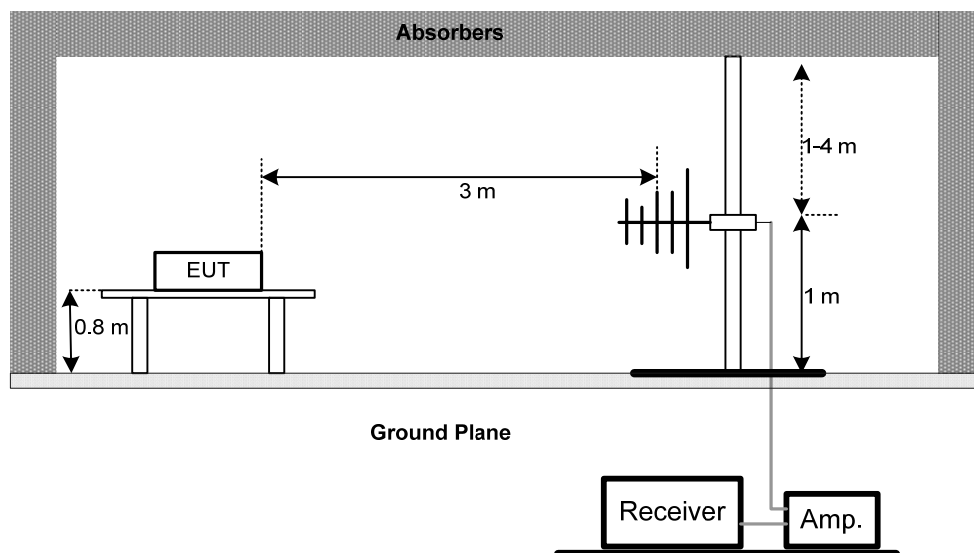

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

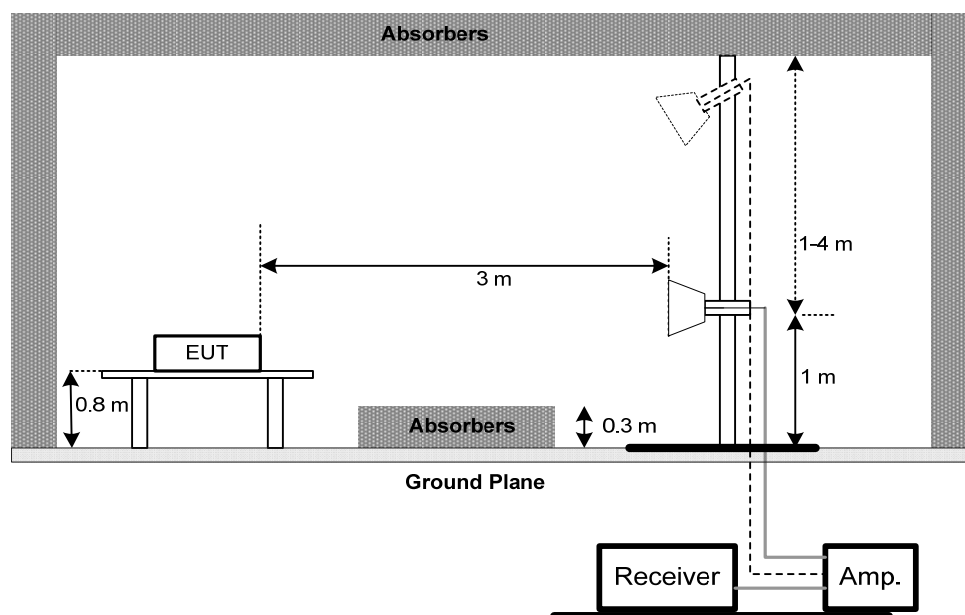

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 25°C Relative Humidity: 60%

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 25°C Relative Humidity: 60%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Controller	CT	SC100	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
10	Test Cable	emci	EMC104-SM-SM-100 00(1GHz – 26.5GHz)	C-68	Jun. 28, 2016
11	Controller	CT	SC100	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Line

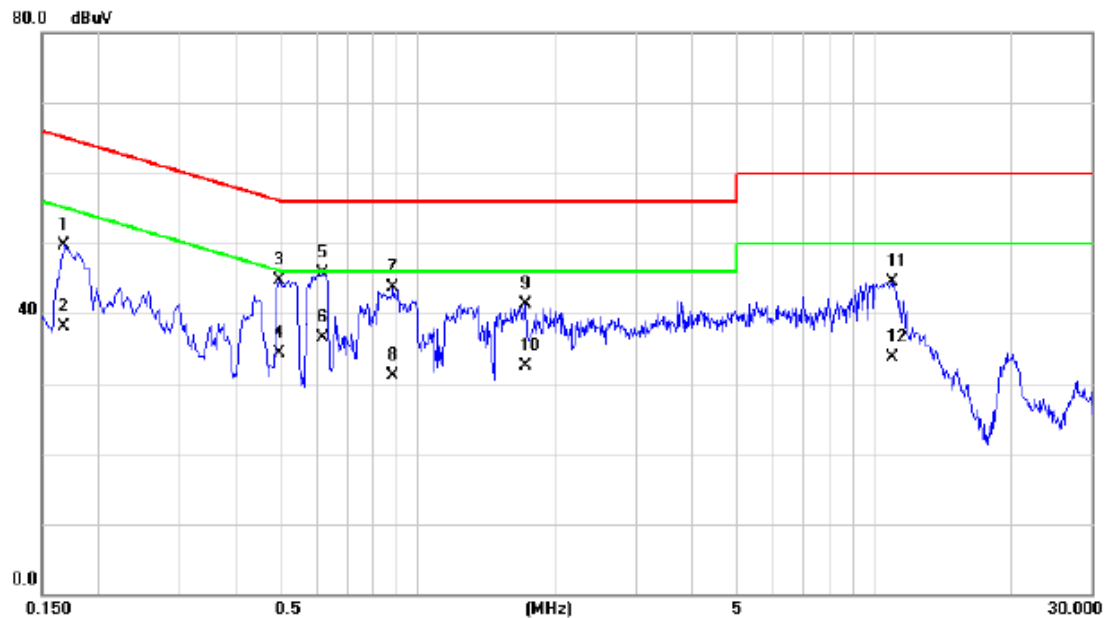

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1675	40.18	9.54	49.72	65.08	-15.36	QP	
2	0.1675	28.60	9.54	38.14	55.08	-16.94	AVG	
3	0.4980	35.09	9.67	44.76	56.03	-11.27	QP	
4	0.4980	24.70	9.67	34.37	46.03	-11.66	AVG	
5	0.6180	35.98	9.72	45.70	56.00	-10.30	QP	
6 *	0.6180	26.80	9.72	36.52	46.00	-9.48	AVG	
7	0.8820	33.85	9.77	43.62	56.00	-12.38	QP	
8	0.8820	21.40	9.77	31.17	46.00	-14.83	AVG	
9	1.7180	31.40	9.87	41.27	56.00	-14.73	QP	
10	1.7180	22.60	9.87	32.47	46.00	-13.53	AVG	
11	10.9260	34.54	9.88	44.42	60.00	-15.58	QP	
12	10.9260	23.80	9.88	33.68	50.00	-16.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Neutral

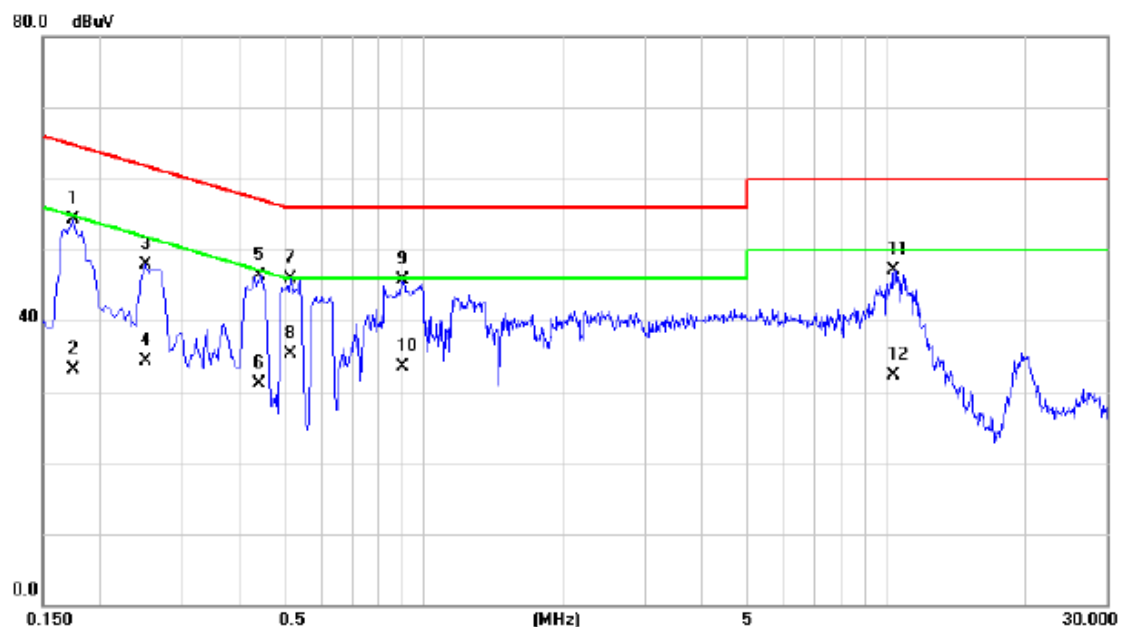

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1740	44.93	9.46	54.39	64.77	-10.38	QP	
2		0.1740	23.70	9.46	33.16	54.77	-21.61	AVG	
3		0.2500	38.42	9.50	47.92	61.76	-13.84	QP	
4		0.2500	24.80	9.50	34.30	51.76	-17.46	AVG	
5		0.4420	36.81	9.53	46.34	57.02	-10.68	QP	
6		0.4420	21.60	9.53	31.13	47.02	-15.89	AVG	
7	*	0.5140	36.41	9.55	45.96	56.00	-10.04	QP	
8		0.5140	25.80	9.55	35.35	46.00	-10.65	AVG	
9		0.8980	36.03	9.58	45.61	56.00	-10.39	QP	
10		0.8980	23.90	9.58	33.48	46.00	-12.52	AVG	
11		10.3580	37.17	9.86	47.03	60.00	-12.97	QP	
12		10.3580	22.40	9.86	32.26	50.00	-17.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: Desay + Earphone: LIANCHUANG


Line

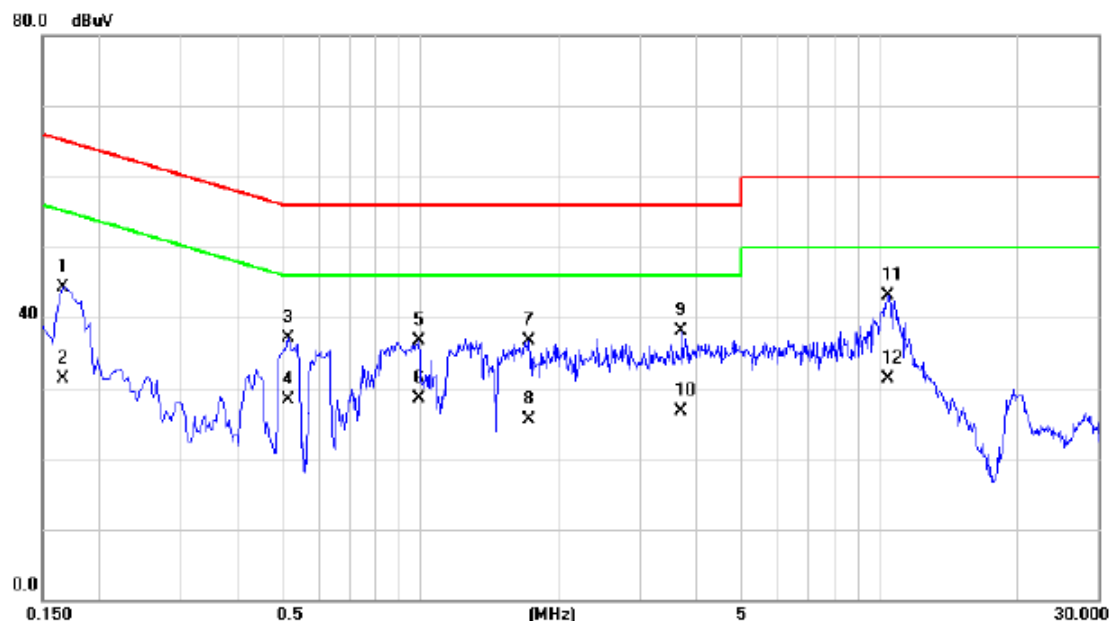

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1660	34.77	9.54	44.31	65.16	-20.85	QP	
2		0.1660	21.70	9.54	31.24	55.16	-23.92	AVG	
3		0.5140	27.37	9.68	37.05	56.00	-18.95	QP	
4		0.5140	18.60	9.68	28.28	46.00	-17.72	AVG	
5		0.9940	26.91	9.79	36.70	56.00	-19.30	QP	
6		0.9940	18.70	9.79	28.49	46.00	-17.51	AVG	
7		1.7180	26.78	9.87	36.65	56.00	-19.35	QP	
8		1.7180	15.60	9.87	25.47	46.00	-20.53	AVG	
9		3.7060	28.13	9.96	38.09	56.00	-17.91	QP	
10		3.7060	16.70	9.96	26.66	46.00	-19.34	AVG	
11	*	10.4220	33.30	9.88	43.18	60.00	-16.82	QP	
12		10.4220	21.40	9.88	31.28	50.00	-18.72	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: Desay + Earphone: LIANCHUANG


Neutral

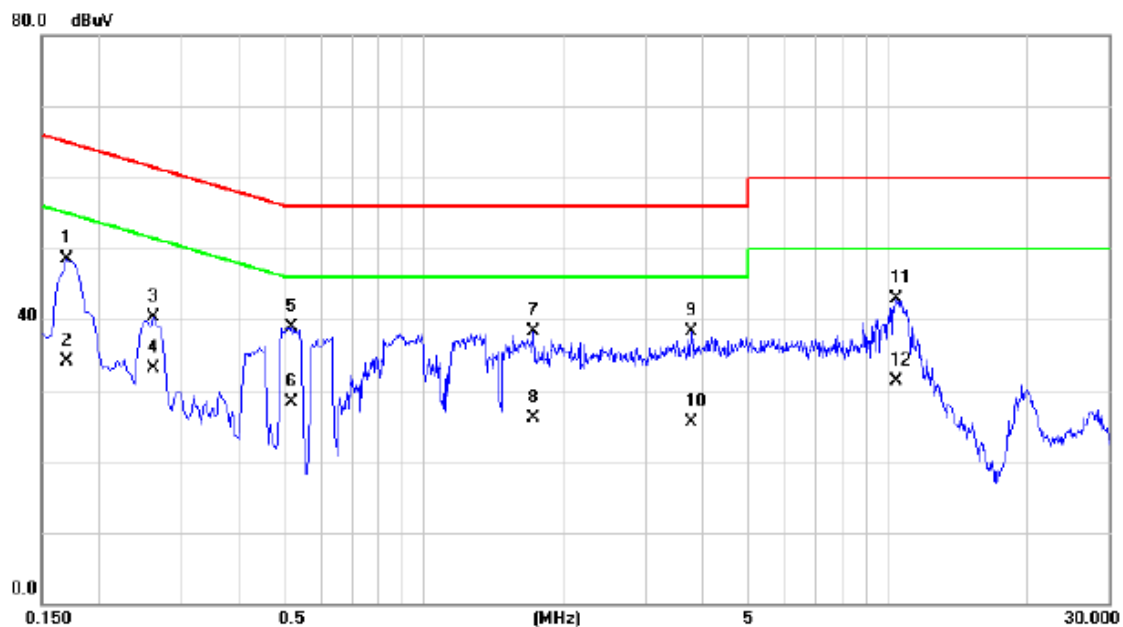

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1	*	0.1700	38.95	9.46	48.41	64.96	-16.55	QP	
2		0.1700	24.70	9.46	34.16	54.96	-20.80	AVG	
3		0.2620	30.71	9.50	40.21	61.37	-21.16	QP	
4		0.2620	23.60	9.50	33.10	51.37	-18.27	AVG	
5		0.5180	29.32	9.55	38.87	56.00	-17.13	QP	
6		0.5180	18.70	9.55	28.25	46.00	-17.75	AVG	
7		1.7180	28.63	9.68	38.31	56.00	-17.69	QP	
8		1.7180	16.40	9.68	26.08	46.00	-19.92	AVG	
9		3.7780	28.35	9.87	38.22	56.00	-17.78	QP	
10		3.7780	15.70	9.87	25.57	46.00	-20.43	AVG	
11		10.4300	33.00	9.86	42.86	60.00	-17.14	QP	
12		10.4300	21.40	9.86	31.26	50.00	-18.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Line

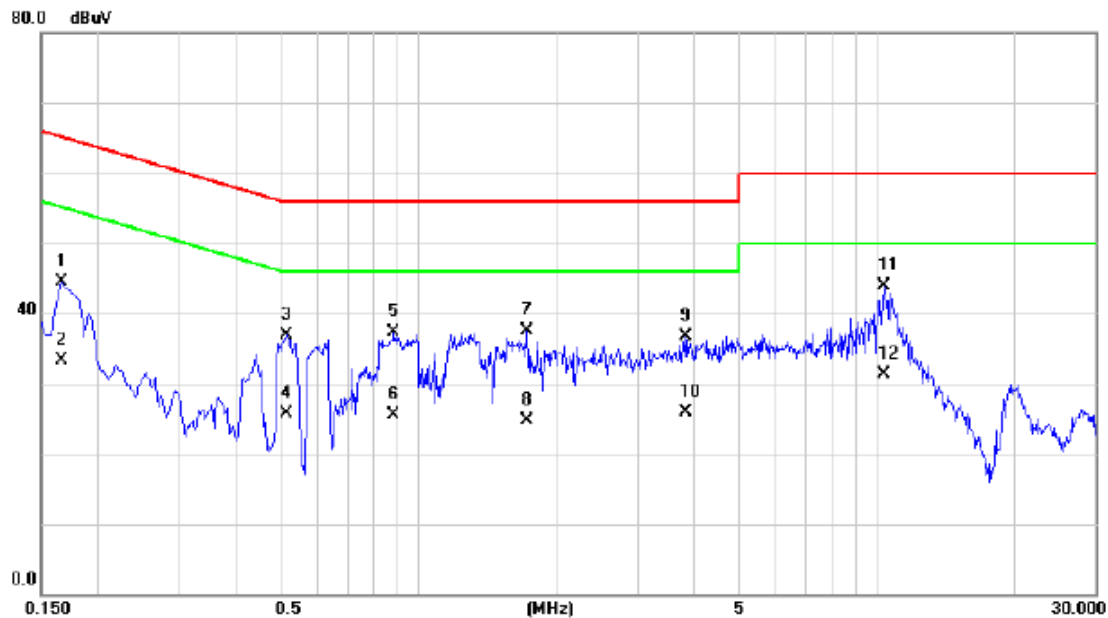

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1660	34.97	9.54	44.51	65.16	-20.65	QP	
2		0.1660	23.70	9.54	33.24	55.16	-21.92	AVG	
3		0.5140	27.14	9.68	36.82	56.00	-19.18	QP	
4		0.5140	16.10	9.68	25.78	46.00	-20.22	AVG	
5		0.8820	27.59	9.77	37.36	56.00	-18.64	QP	
6		0.8820	15.70	9.77	25.47	46.00	-20.53	AVG	
7		1.7180	27.54	9.87	37.41	56.00	-18.59	QP	
8		1.7180	14.80	9.87	24.67	46.00	-21.33	AVG	
9		3.8380	26.74	9.95	36.69	56.00	-19.31	QP	
10		3.8380	15.90	9.95	25.85	46.00	-20.15	AVG	
11	*	10.3700	33.96	9.88	43.84	60.00	-16.16	QP	
12		10.3700	21.50	9.88	31.38	50.00	-18.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Neutral

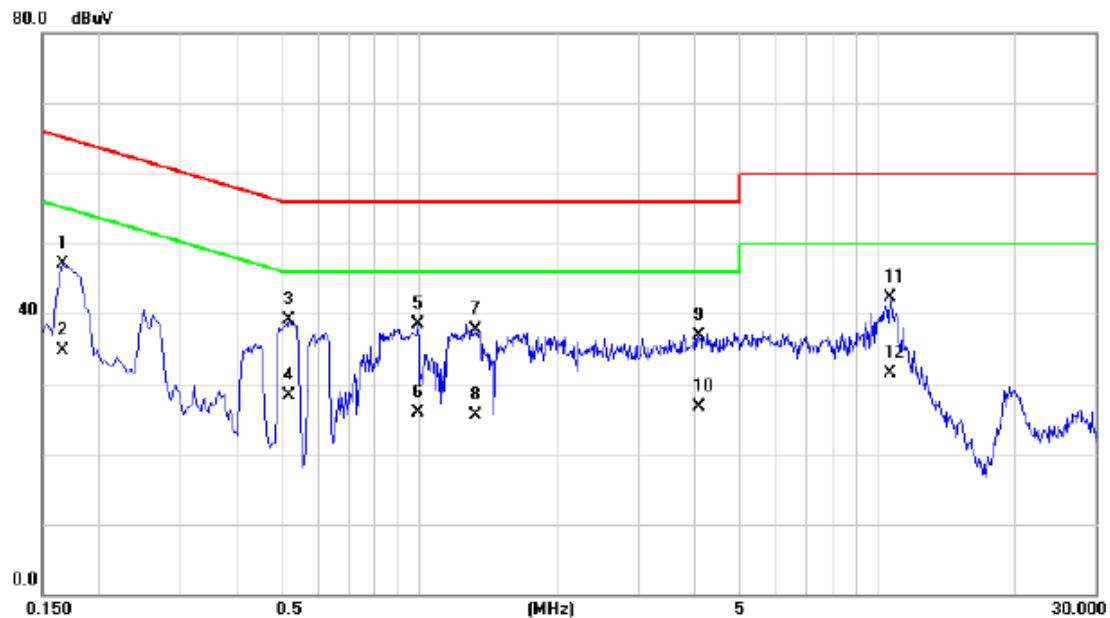

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1660	37.65	9.46	47.11	65.16	-18.05	QP	
2		0.1660	25.30	9.46	34.76	55.16	-20.40	AVG	
3	*	0.5180	29.61	9.55	39.16	56.00	-16.84	QP	
4		0.5180	18.70	9.55	28.25	46.00	-17.75	AVG	
5		0.9940	28.85	9.57	38.42	56.00	-17.58	QP	
6		0.9940	16.40	9.57	25.97	46.00	-20.03	AVG	
7		1.3300	27.99	9.63	37.62	56.00	-18.38	QP	
8		1.3300	15.90	9.63	25.53	46.00	-20.47	AVG	
9		4.0700	27.08	9.89	36.97	56.00	-19.03	QP	
10		4.0700	16.80	9.89	26.69	46.00	-19.31	AVG	
11		10.6860	32.43	9.87	42.30	60.00	-17.70	QP	
12		10.6860	21.70	9.87	31.57	50.00	-18.43	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: Desay + Earphone: GoerTek / HG-04A


Line

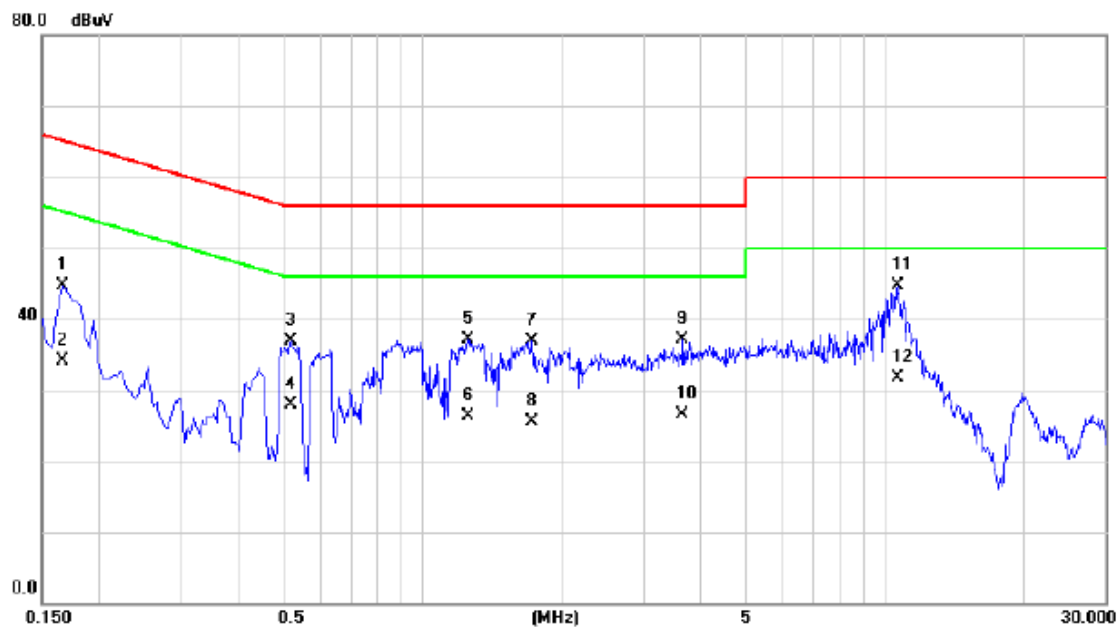

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1660	35.08	9.54	44.62	65.16	-20.54	QP	
2		0.1660	24.60	9.54	34.14	55.16	-21.02	AVG	
3		0.5180	27.13	9.68	36.81	56.00	-19.19	QP	
4		0.5180	18.30	9.68	27.98	46.00	-18.02	AVG	
5		1.2500	27.20	9.81	37.01	56.00	-18.99	QP	
6		1.2500	16.50	9.81	26.31	46.00	-19.69	AVG	
7		1.7180	27.05	9.87	36.92	56.00	-19.08	QP	
8		1.7180	15.70	9.87	25.57	46.00	-20.43	AVG	
9		3.6500	27.07	9.97	37.04	56.00	-18.96	QP	
10		3.6500	16.50	9.97	26.47	46.00	-19.53	AVG	
11	*	10.6300	34.75	9.88	44.63	60.00	-15.37	QP	
12		10.6300	21.80	9.88	31.68	50.00	-18.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: Desay + Earphone: GoerTek / HG-04A


Neutral

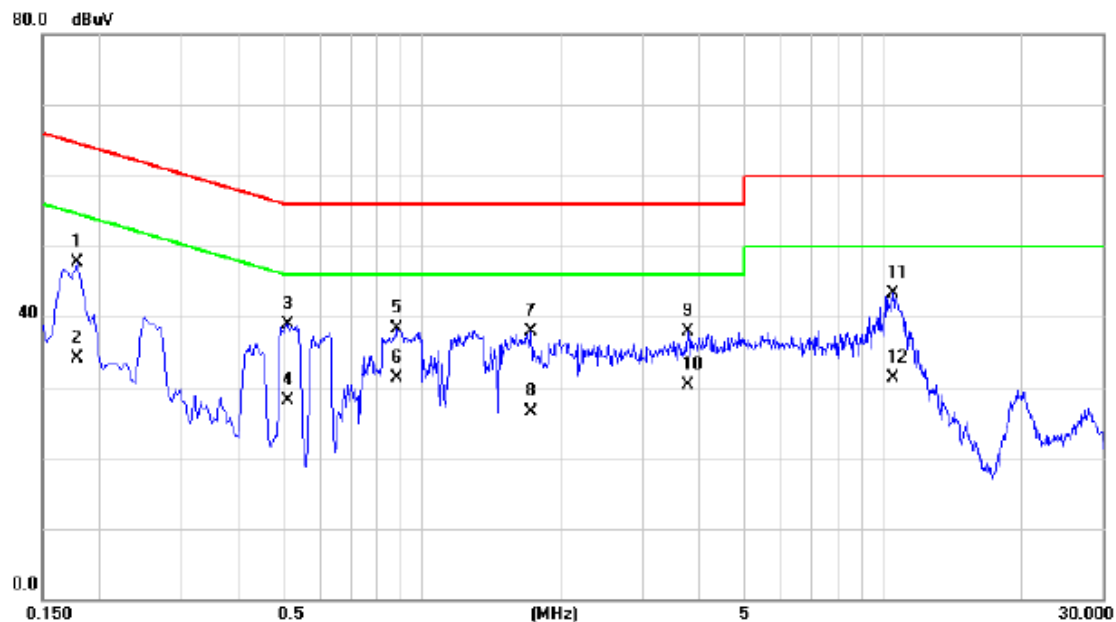

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1780	38.14	9.48	47.62	64.58	-16.96	QP	
2		0.1780	24.70	9.48	34.18	54.58	-20.40	AVG	
3		0.5100	29.38	9.55	38.93	56.00	-17.07	QP	
4		0.5100	18.60	9.55	28.15	46.00	-17.85	AVG	
5		0.8820	28.77	9.58	38.35	56.00	-17.65	QP	
6	*	0.8820	21.70	9.58	31.28	46.00	-14.72	AVG	
7		1.7180	28.13	9.68	37.81	56.00	-18.19	QP	
8		1.7180	16.80	9.68	26.48	46.00	-19.52	AVG	
9		3.7780	28.02	9.87	37.89	56.00	-18.11	QP	
10		3.7780	20.40	9.87	30.27	46.00	-15.73	AVG	
11		10.5020	33.38	9.87	43.25	60.00	-16.75	QP	
12		10.5020	21.50	9.87	31.37	50.00	-18.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Line

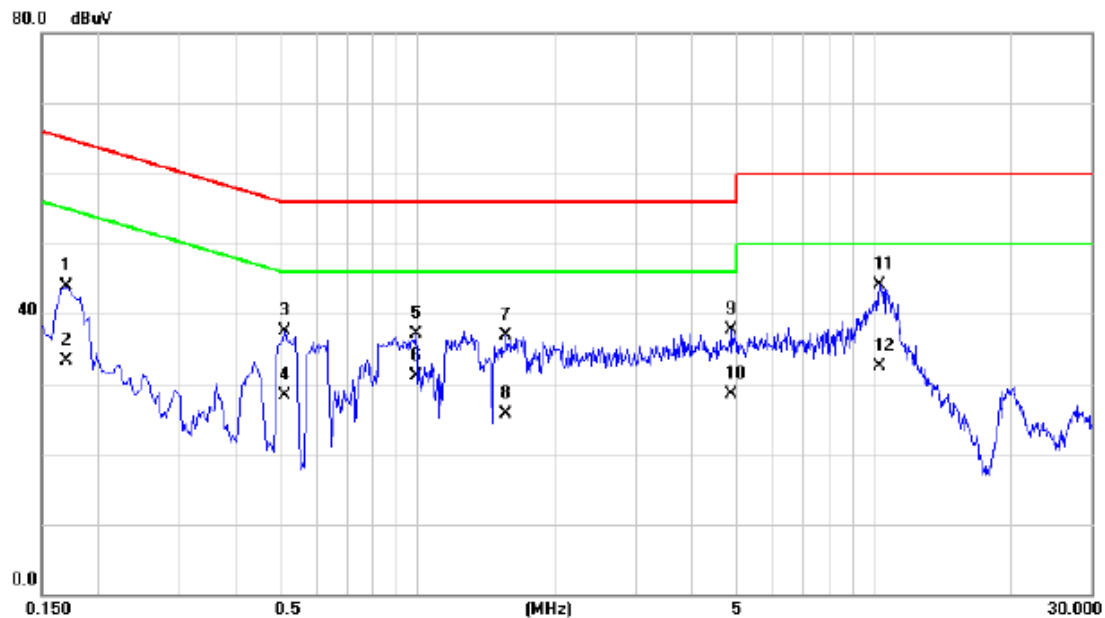

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1700	34.29	9.54	43.83	64.96	-21.13	QP	
2		0.1700	23.70	9.54	33.24	54.96	-21.72	AVG	
3		0.5100	27.92	9.67	37.59	56.00	-18.41	QP	
4		0.5100	18.60	9.67	28.27	46.00	-17.73	AVG	
5		0.9940	27.26	9.79	37.05	56.00	-18.95	QP	
6	*	0.9940	21.40	9.79	31.19	46.00	-14.81	AVG	
7		1.5620	27.09	9.85	36.94	56.00	-19.06	QP	
8		1.5620	15.90	9.85	25.75	46.00	-20.25	AVG	
9		4.8820	27.72	9.95	37.67	56.00	-18.33	QP	
10		4.8820	18.60	9.95	28.55	46.00	-17.45	AVG	
11		10.3100	34.21	9.88	44.09	60.00	-15.91	QP	
12		10.3100	22.70	9.88	32.58	50.00	-17.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Neutral

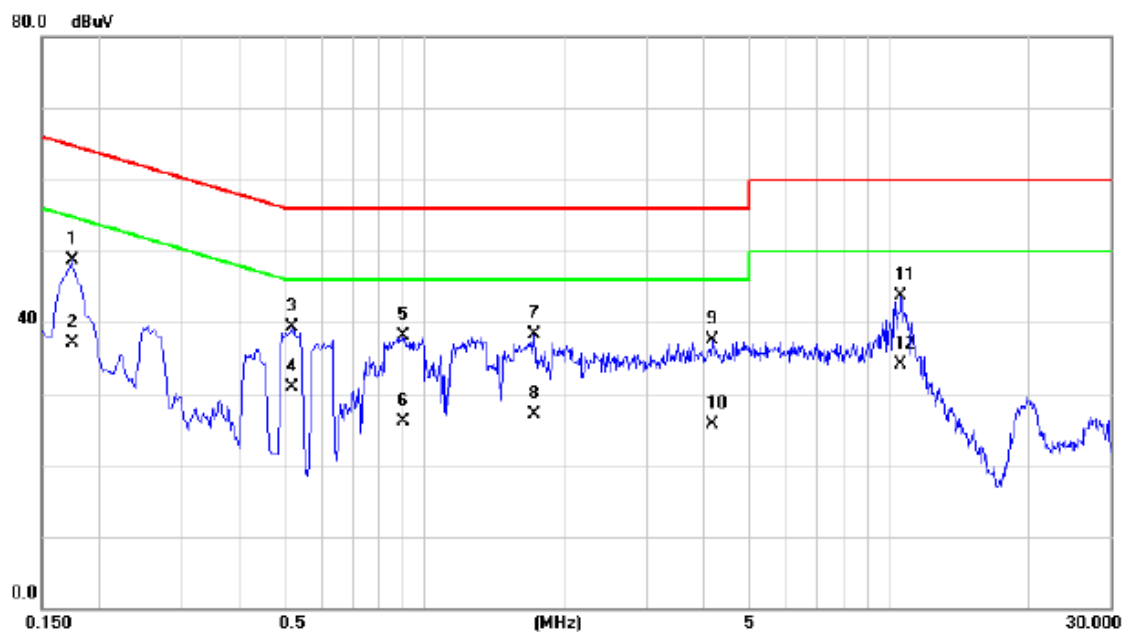

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1740	39.17	9.46	48.63	64.77	-16.14	QP	
2		0.1740	27.60	9.46	37.06	54.77	-17.71	AVG	
3		0.5180	29.83	9.55	39.38	56.00	-16.62	QP	
4	*	0.5180	21.40	9.55	30.95	46.00	-15.05	AVG	
5		0.8980	28.51	9.58	38.09	56.00	-17.91	QP	
6		0.8980	16.50	9.58	26.08	46.00	-19.92	AVG	
7		1.7180	28.59	9.68	38.27	56.00	-17.73	QP	
8		1.7180	17.40	9.68	27.08	46.00	-18.92	AVG	
9		4.1580	27.70	9.89	37.59	56.00	-18.41	QP	
10		4.1580	15.90	9.89	25.79	46.00	-20.21	AVG	
11		10.5660	33.84	9.87	43.71	60.00	-16.29	QP	
12		10.5660	24.20	9.87	34.07	50.00	-15.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Unirise +Battery: SCUD + Earphone: QUANCHENG


Line

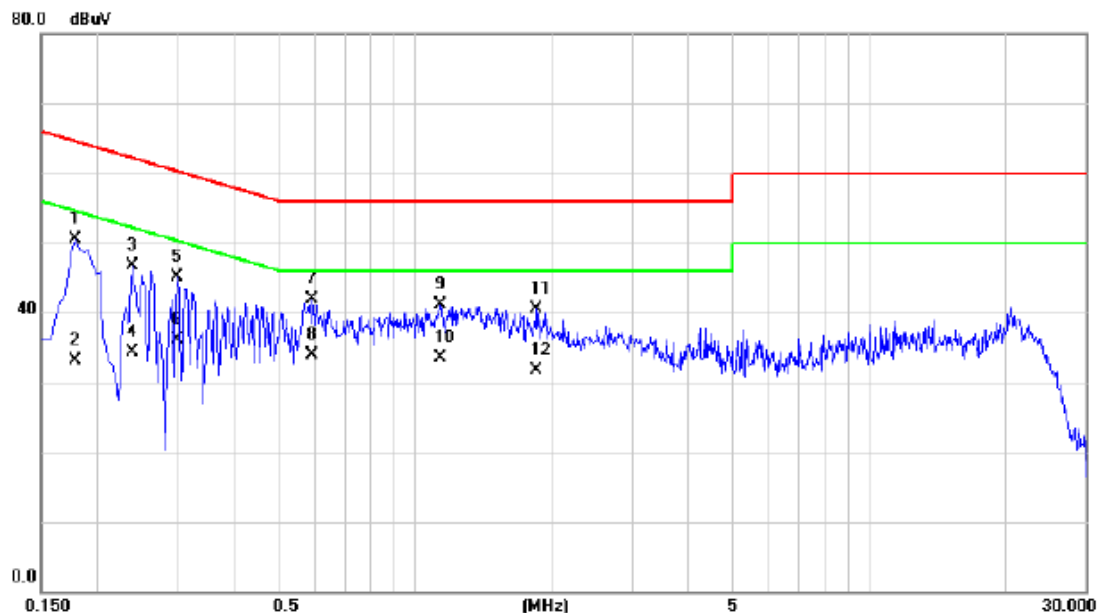

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1780	40.89	9.55	50.44	64.58	-14.14	QP	
2		0.1780	23.60	9.55	33.15	54.58	-21.43	AVG	
3		0.2380	37.06	9.59	46.65	62.17	-15.52	QP	
4		0.2380	24.70	9.59	34.29	52.17	-17.88	AVG	
5		0.2980	35.38	9.63	45.01	60.30	-15.29	QP	
6		0.2980	26.50	9.63	36.13	50.30	-14.17	AVG	
7		0.5940	32.12	9.71	41.83	56.00	-14.17	QP	
8	*	0.5940	24.10	9.71	33.81	46.00	-12.19	AVG	
9		1.1380	31.30	9.80	41.10	56.00	-14.90	QP	
10		1.1380	23.80	9.80	33.60	46.00	-12.40	AVG	
11		1.8500	30.59	9.90	40.49	56.00	-15.51	QP	
12		1.8500	21.80	9.90	31.70	46.00	-14.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Unirise +Battery: SCUD + Earphone: QUANCHENG


Neutral

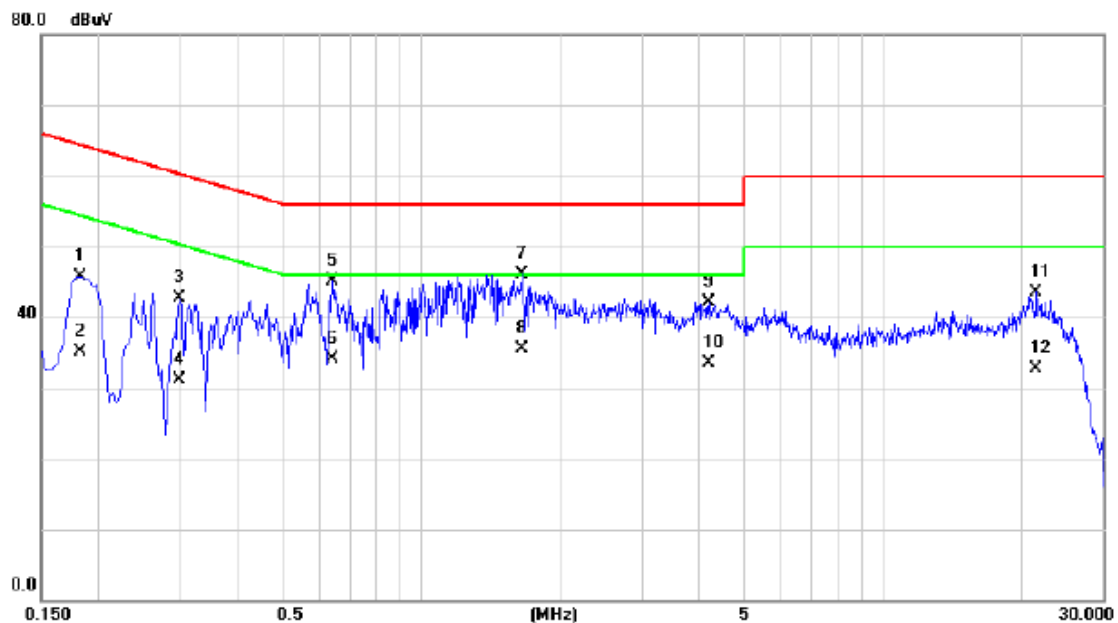

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1820	36.22	9.48	45.70	64.39	-18.69	QP	
2		0.1820	25.70	9.48	35.18	54.39	-19.21	AVG	
3		0.2980	33.18	9.51	42.69	60.30	-17.61	QP	
4		0.2980	21.60	9.51	31.11	50.30	-19.19	AVG	
5		0.6420	35.62	9.54	45.16	56.00	-10.84	QP	
6		0.6420	24.60	9.54	34.14	46.00	-11.86	AVG	
7	*	1.6460	36.35	9.67	46.02	56.00	-9.98	QP	
8		1.6460	25.80	9.67	35.47	46.00	-10.53	AVG	
9		4.1940	32.30	9.89	42.19	56.00	-13.81	QP	
10		4.1940	23.60	9.89	33.49	46.00	-12.51	AVG	
11		21.4940	33.62	9.98	43.60	60.00	-16.40	QP	
12		21.4940	22.80	9.98	32.78	50.00	-17.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK + USB Cable: Unirise +Battery: SCUD + Earphone: QUANCHENG


Line

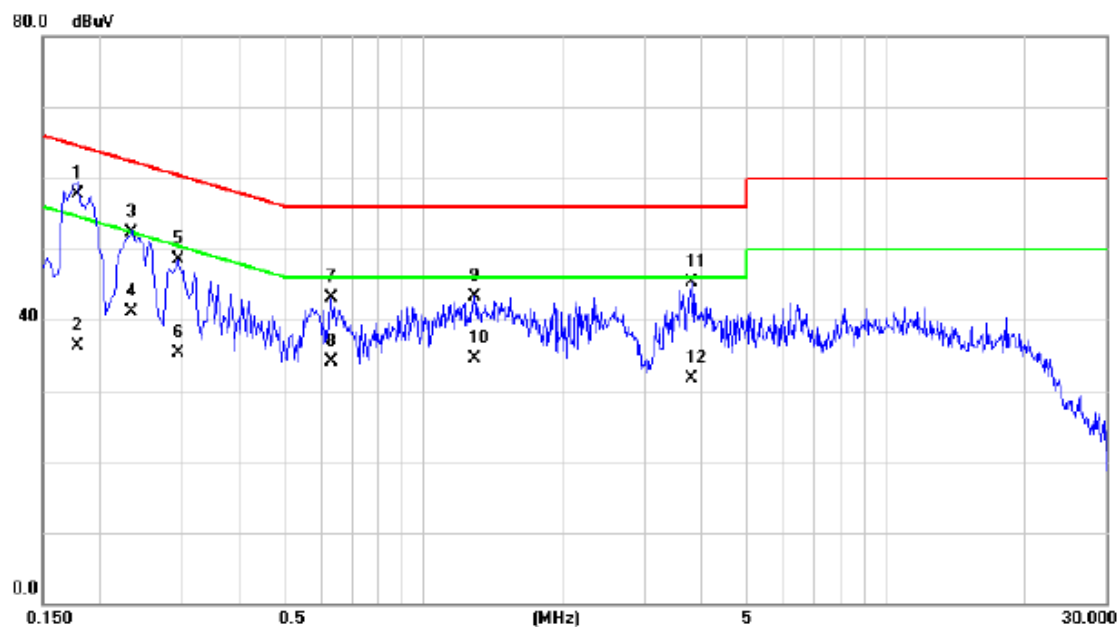

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1	*	0.1780	48.10	9.55	57.65	64.58	-6.93	QP	
2		0.1780	26.70	9.55	36.25	54.58	-18.33	AVG	
3		0.2340	42.70	9.59	52.29	62.31	-10.02	QP	
4		0.2340	31.50	9.59	41.09	52.31	-11.22	AVG	
5		0.2940	38.95	9.63	48.58	60.41	-11.83	QP	
6		0.2940	25.70	9.63	35.33	50.41	-15.08	AVG	
7		0.6300	33.37	9.72	43.09	56.00	-12.91	QP	
8		0.6300	24.30	9.72	34.02	46.00	-11.98	AVG	
9		1.2860	33.58	9.82	43.40	56.00	-12.60	QP	
10		1.2860	24.60	9.82	34.42	46.00	-11.58	AVG	
11		3.7980	35.28	9.96	45.24	56.00	-10.76	QP	
12		3.7980	21.70	9.96	31.66	46.00	-14.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK + USB Cable: Unirise +Battery: SCUD + Earphone: QUANCHENG


Neutral

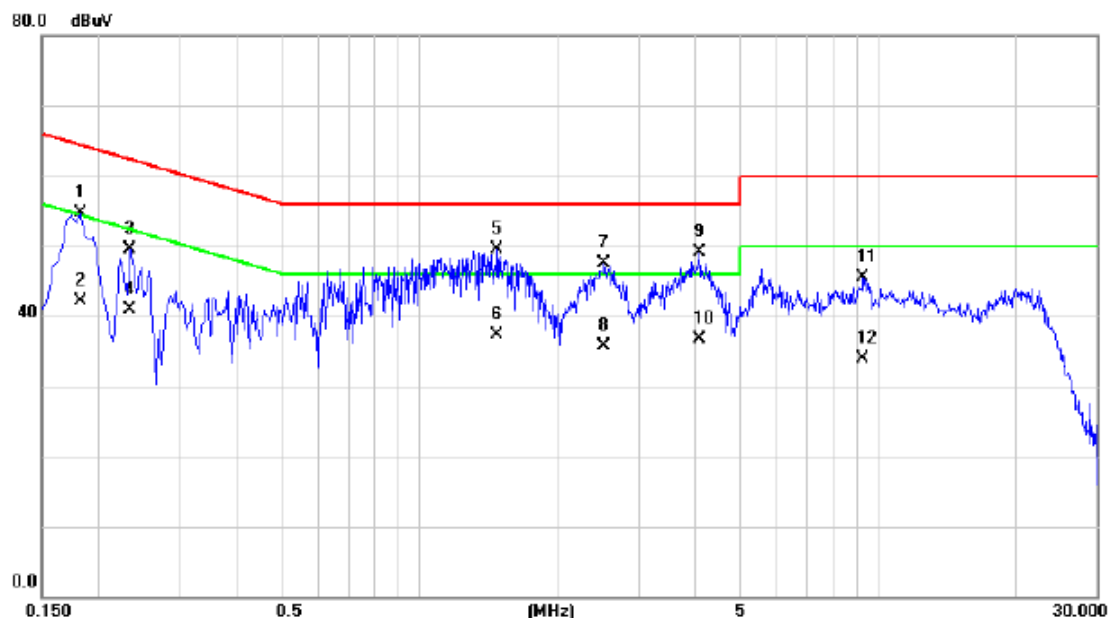

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1820	45.15	9.48	54.63	64.39	-9.76	QP	
2		0.1820	32.70	9.48	42.18	54.39	-12.21	AVG	
3		0.2340	40.10	9.50	49.60	62.31	-12.71	QP	
4		0.2340	31.40	9.50	40.90	52.31	-11.41	AVG	
5	*	1.4740	39.82	9.65	49.47	56.00	-6.53	QP	
6		1.4740	27.60	9.65	37.25	46.00	-8.75	AVG	
7		2.5220	37.68	9.76	47.44	56.00	-8.56	QP	
8		2.5220	25.90	9.76	35.66	46.00	-10.34	AVG	
9		4.0860	39.22	9.89	49.11	56.00	-6.89	QP	
10		4.0860	26.80	9.89	36.69	46.00	-9.31	AVG	
11		9.2820	35.56	9.86	45.42	60.00	-14.58	QP	
12		9.2820	24.10	9.86	33.96	50.00	-16.04	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek + USB Cable: Unirise + Battery: SCUD + Earphone: QUANCHENG


Line

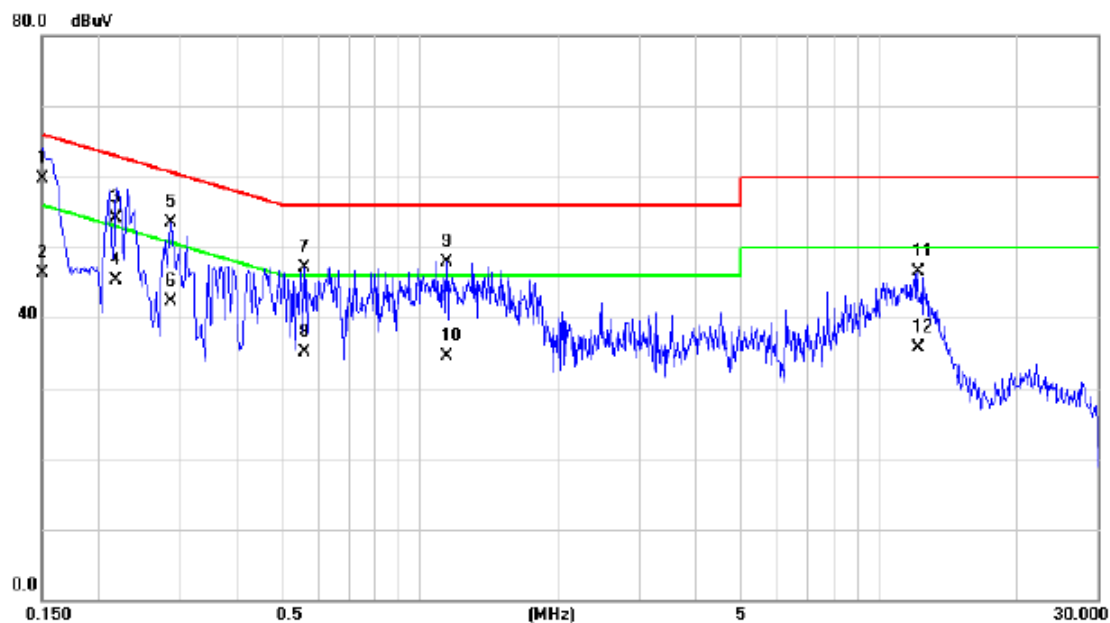

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	50.20	9.52	59.72	66.00	-6.28	QP	
2		0.1500	36.70	9.52	46.22	56.00	-9.78	AVG	
3		0.2180	44.60	9.57	54.17	62.89	-8.72	QP	
4		0.2180	35.70	9.57	45.27	52.89	-7.62	AVG	
5		0.2860	43.96	9.62	53.58	60.64	-7.06	QP	
6		0.2860	32.60	9.62	42.22	50.64	-8.42	AVG	
7		0.5620	37.36	9.69	47.05	56.00	-8.95	QP	
8		0.5620	25.40	9.69	35.09	46.00	-10.91	AVG	
9		1.1420	38.10	9.80	47.90	56.00	-8.10	QP	
10		1.1420	24.80	9.80	34.60	46.00	-11.40	AVG	
11		12.1620	36.67	9.86	46.53	60.00	-13.47	QP	
12		12.1620	25.90	9.86	35.76	50.00	-14.24	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek + USB Cable: Unirise + Battery: SCUD + Earphone: QUANCHENG


Neutral

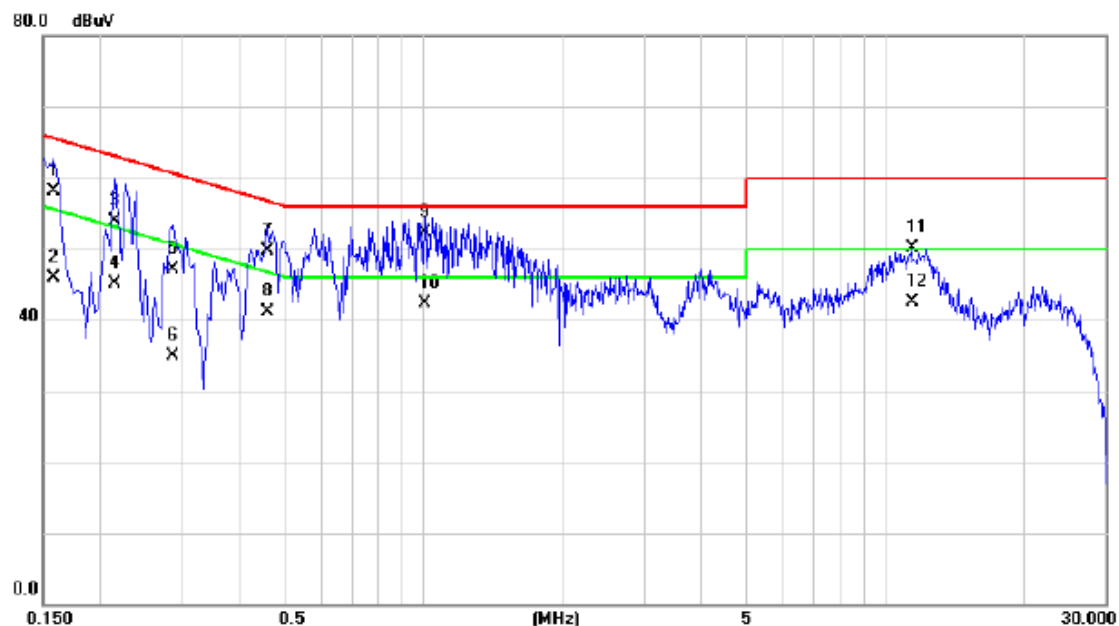

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1580	48.70	9.47	58.17	65.57	-7.40	QP	
2		0.1580	36.50	9.47	45.97	55.57	-9.60	AVG	
3		0.2140	44.50	9.49	53.99	63.05	-9.06	QP	
4		0.2140	35.70	9.49	45.19	53.05	-7.86	AVG	
5		0.2860	37.50	9.51	47.01	60.64	-13.63	QP	
6		0.2860	25.40	9.51	34.91	50.64	-15.73	AVG	
7		0.4580	40.20	9.54	49.74	56.73	-6.99	QP	
8		0.4580	31.60	9.54	41.14	46.73	-5.59	AVG	
9		1.0060	42.70	9.57	52.27	56.00	-3.73	QP	
10	*	1.0060	32.80	9.57	42.37	46.00	-3.63	AVG	
11		11.4100	40.14	9.87	50.01	60.00	-9.99	QP	
12		11.4100	32.70	9.87	42.57	50.00	-7.43	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD


Line

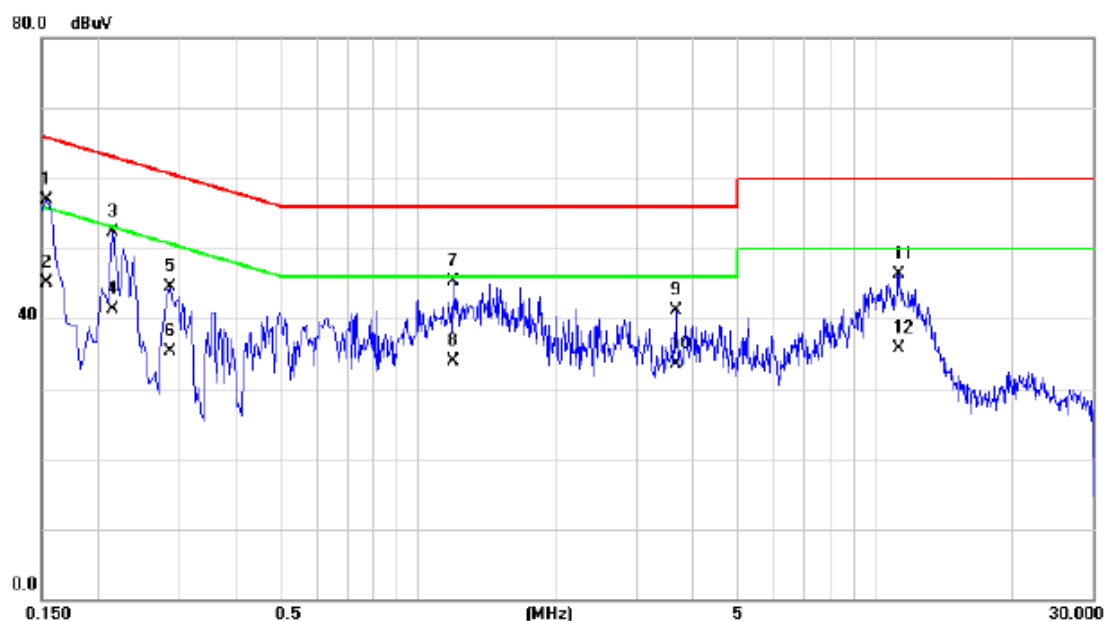

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1	*	0.1540	47.39	9.52	56.91	65.78	-8.87	QP	
2		0.1540	35.60	9.52	45.12	55.78	-10.66	AVG	
3		0.2140	42.78	9.57	52.35	63.05	-10.70	QP	
4		0.2140	31.70	9.57	41.27	53.05	-11.78	AVG	
5		0.2860	34.79	9.62	44.41	60.64	-16.23	QP	
6		0.2860	25.70	9.62	35.32	50.64	-15.32	AVG	
7		1.1900	35.49	9.81	45.30	56.00	-10.70	QP	
8		1.1900	24.10	9.81	33.91	46.00	-12.09	AVG	
9		3.6620	31.08	9.97	41.05	56.00	-14.95	QP	
10		3.6620	23.60	9.97	33.57	46.00	-12.43	AVG	
11		11.2580	36.48	9.87	46.35	60.00	-13.65	QP	
12		11.2580	25.90	9.87	35.77	50.00	-14.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD


Neutral

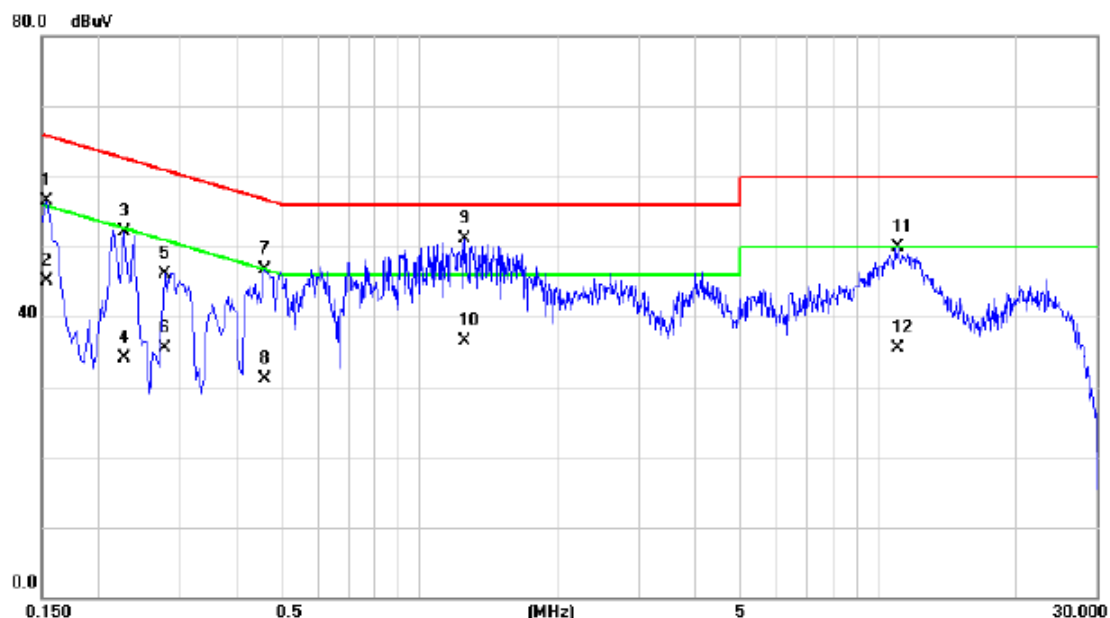

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1540	47.09	9.47	56.56	65.78	-9.22	QP	
2		0.1540	35.60	9.47	45.07	55.78	-10.71	AVG	
3		0.2260	42.60	9.50	52.10	62.60	-10.50	QP	
4		0.2260	24.70	9.50	34.20	52.60	-18.40	AVG	
5		0.2780	36.65	9.51	46.16	60.88	-14.72	QP	
6		0.2780	25.90	9.51	35.41	50.88	-15.47	AVG	
7		0.4580	37.12	9.54	46.66	56.73	-10.07	QP	
8		0.4580	21.60	9.54	31.14	46.73	-15.59	AVG	
9	*	1.2540	41.45	9.63	51.08	56.00	-4.92	QP	
10		1.2540	26.80	9.63	36.43	46.00	-9.57	AVG	
11		11.0420	40.08	9.87	49.95	60.00	-10.05	QP	
12		11.0420	25.70	9.87	35.57	50.00	-14.43	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: Phitek + USB Cable: Unirise + Battery: SCUD + Earphone: QUANCHENG


Line

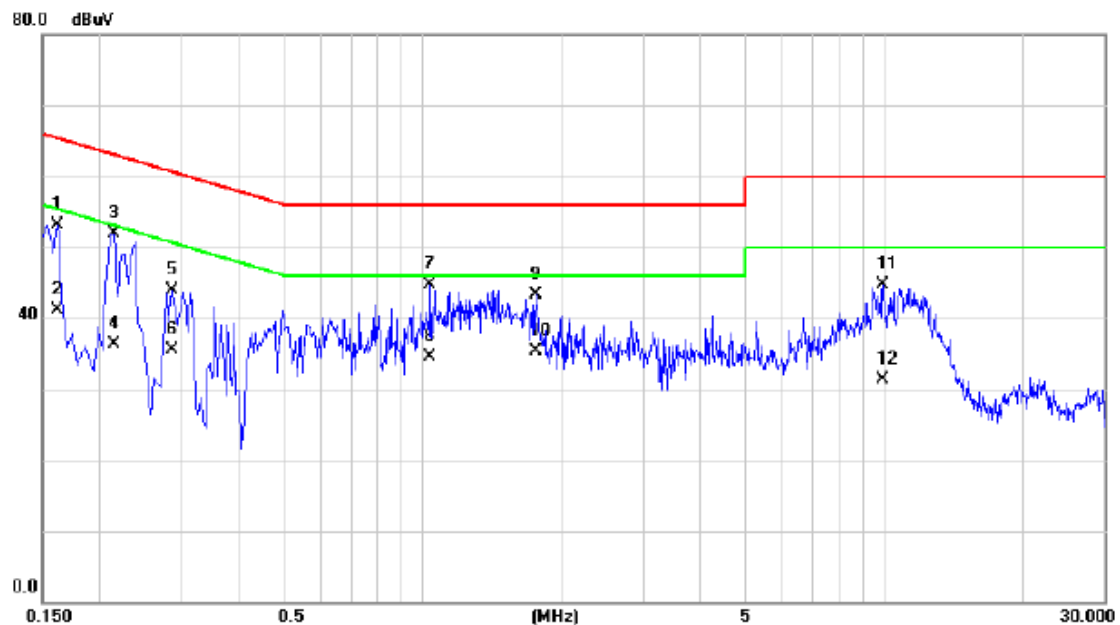

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1620	43.54	9.53	53.07	65.36	-12.29	QP	
2		0.1620	31.50	9.53	41.03	55.36	-14.33	AVG	
3		0.2140	42.38	9.57	51.95	63.05	-11.10	QP	
4		0.2140	26.70	9.57	36.27	53.05	-16.78	AVG	
5		0.2860	34.24	9.62	43.86	60.64	-16.78	QP	
6		0.2860	25.90	9.62	35.52	50.64	-15.12	AVG	
7		1.0380	34.86	9.79	44.65	56.00	-11.35	QP	
8		1.0380	24.80	9.79	34.59	46.00	-11.41	AVG	
9		1.7540	33.40	9.88	43.28	56.00	-12.72	QP	
10	*	1.7540	25.40	9.88	35.28	46.00	-10.72	AVG	
11		9.9620	34.79	9.89	44.68	60.00	-15.32	QP	
12		9.9620	21.50	9.89	31.39	50.00	-18.61	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: Phitek + USB Cable: Unirise + Battery: SCUD + Earphone: QUANCHENG


Neutral

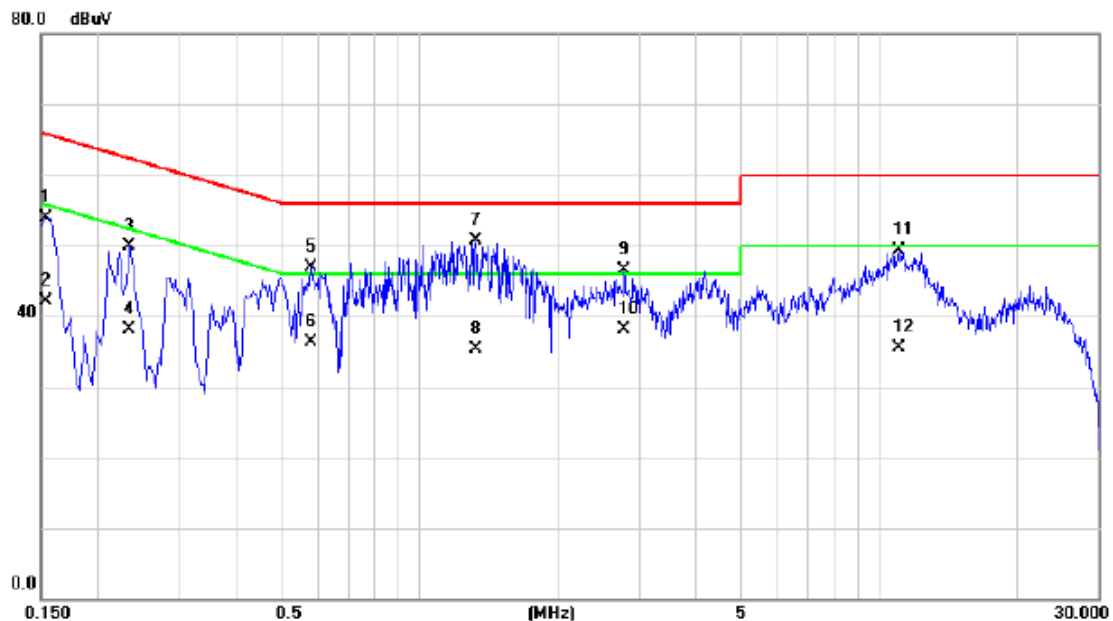

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1540	44.52	9.47	53.99	65.78	-11.79	QP	
2		0.1540	32.70	9.47	42.17	55.78	-13.61	AVG	
3		0.2340	40.34	9.50	49.84	62.31	-12.47	QP	
4		0.2340	28.60	9.50	38.10	52.31	-14.21	AVG	
5		0.5820	37.37	9.55	46.92	56.00	-9.08	QP	
6		0.5820	26.70	9.55	36.25	46.00	-9.75	AVG	
7	*	1.3220	41.16	9.63	50.79	56.00	-5.21	QP	
8		1.3220	25.70	9.63	35.33	46.00	-10.67	AVG	
9		2.7940	36.63	9.78	46.41	56.00	-9.59	QP	
10		2.7940	28.40	9.78	38.18	46.00	-7.82	AVG	
11		11.0140	39.41	9.87	49.28	60.00	-10.72	QP	
12		11.0140	25.70	9.87	35.57	50.00	-14.43	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD


Line

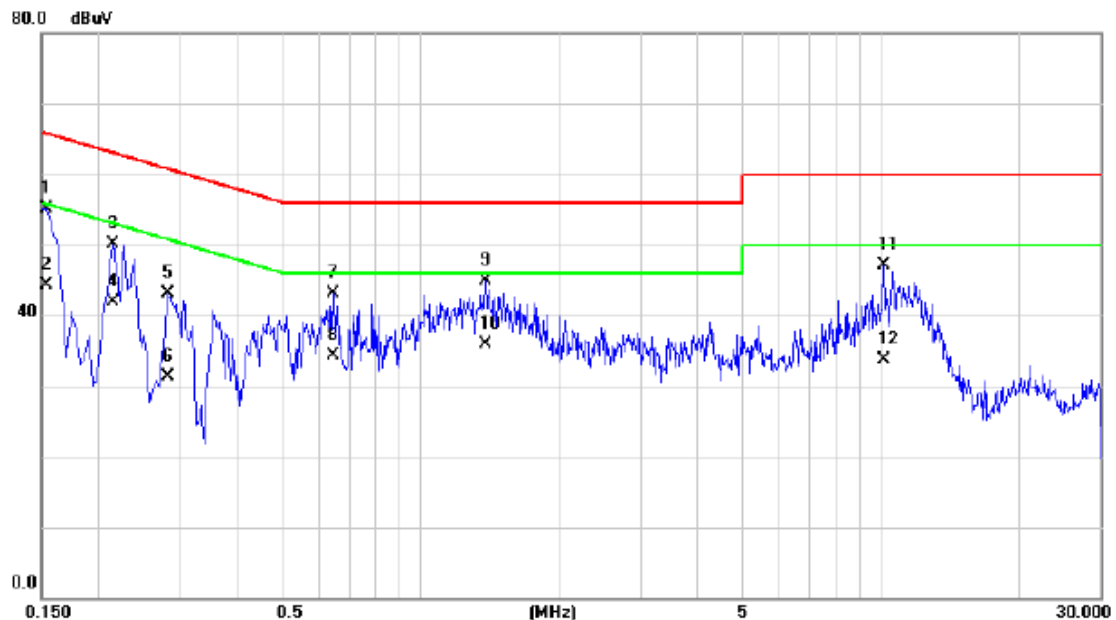

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1540	45.62	9.52	55.14	65.78	-10.64	QP	
2		0.1540	34.70	9.52	44.22	55.78	-11.56	AVG	
3		0.2140	40.62	9.57	50.19	63.05	-12.86	QP	
4		0.2140	32.40	9.57	41.97	53.05	-11.08	AVG	
5		0.2820	33.55	9.62	43.17	60.76	-17.59	QP	
6		0.2820	21.60	9.62	31.22	50.76	-19.54	AVG	
7		0.6460	33.40	9.72	43.12	56.00	-12.88	QP	
8		0.6460	24.50	9.72	34.22	46.00	-11.78	AVG	
9		1.3860	35.05	9.82	44.87	56.00	-11.13	QP	
10	*	1.3860	26.10	9.82	35.92	46.00	-10.08	AVG	
11		10.1700	37.28	9.89	47.17	60.00	-12.83	QP	
12		10.1700	23.80	9.89	33.69	50.00	-16.31	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD


Neutral

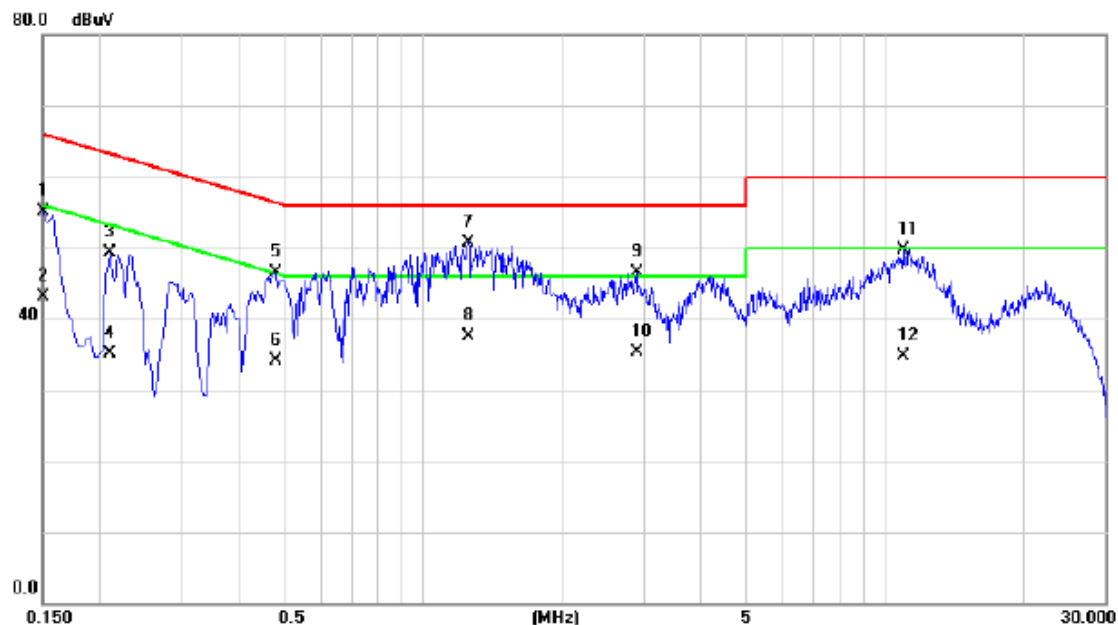

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1500	45.71	9.47	55.18	66.00	-10.82	QP	
2		0.1500	33.60	9.47	43.07	56.00	-12.93	AVG	
3		0.2100	39.83	9.49	49.32	63.21	-13.89	QP	
4		0.2100	25.70	9.49	35.19	53.21	-18.02	AVG	
5		0.4780	36.98	9.54	46.52	56.37	-9.85	QP	
6		0.4780	24.50	9.54	34.04	46.37	-12.33	AVG	
7	*	1.2540	41.11	9.63	50.74	56.00	-5.26	QP	
8		1.2540	27.80	9.63	37.43	46.00	-8.57	AVG	
9		2.8980	36.72	9.79	46.51	56.00	-9.49	QP	
10		2.8980	25.60	9.79	35.39	46.00	-10.61	AVG	
11		10.9300	39.78	9.87	49.65	60.00	-10.35	QP	
12		10.9300	24.80	9.87	34.67	50.00	-15.33	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD


Line

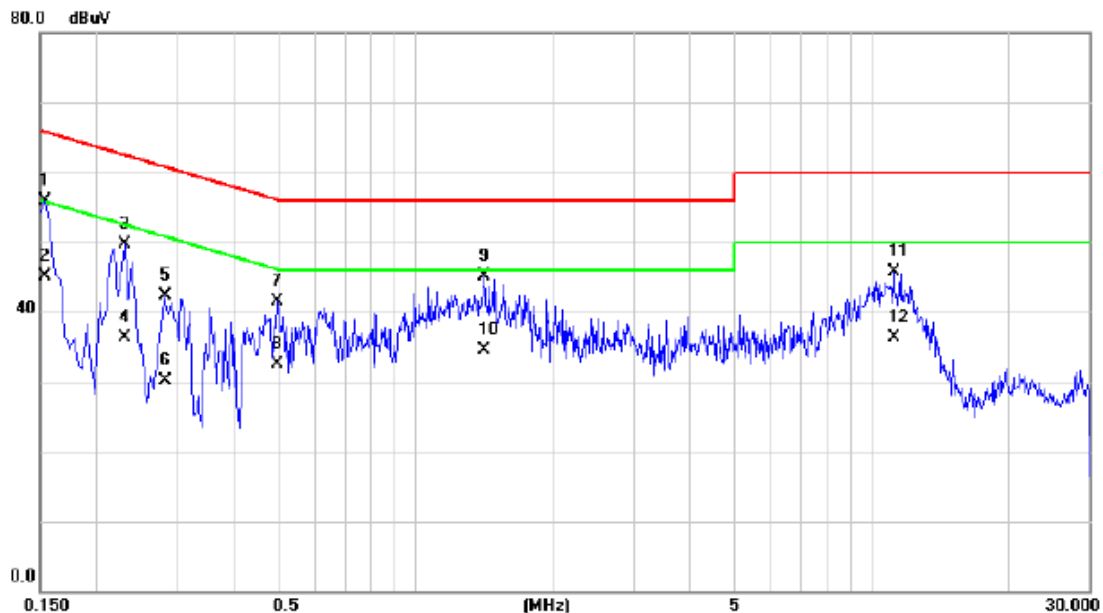

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1540	46.41	9.52	55.93	65.78	-9.85	QP	
2		0.1540	35.60	9.52	45.12	55.78	-10.66	AVG	
3		0.2300	40.19	9.58	49.77	62.45	-12.68	QP	
4		0.2300	26.70	9.58	36.28	52.45	-16.17	AVG	
5		0.2820	32.76	9.62	42.38	60.76	-18.38	QP	
6		0.2820	20.40	9.62	30.02	50.76	-20.74	AVG	
7		0.4980	31.75	9.67	41.42	56.03	-14.61	QP	
8		0.4980	22.80	9.67	32.47	46.03	-13.56	AVG	
9	*	1.4180	35.23	9.82	45.05	46.00	-0.95	AVG	
10		1.4180	24.60	9.82	34.42	46.00	-11.58	AVG	
11		11.1900	35.84	9.87	45.71	60.00	-14.29	QP	
12		11.1900	26.40	9.87	36.27	50.00	-13.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD

Neutral

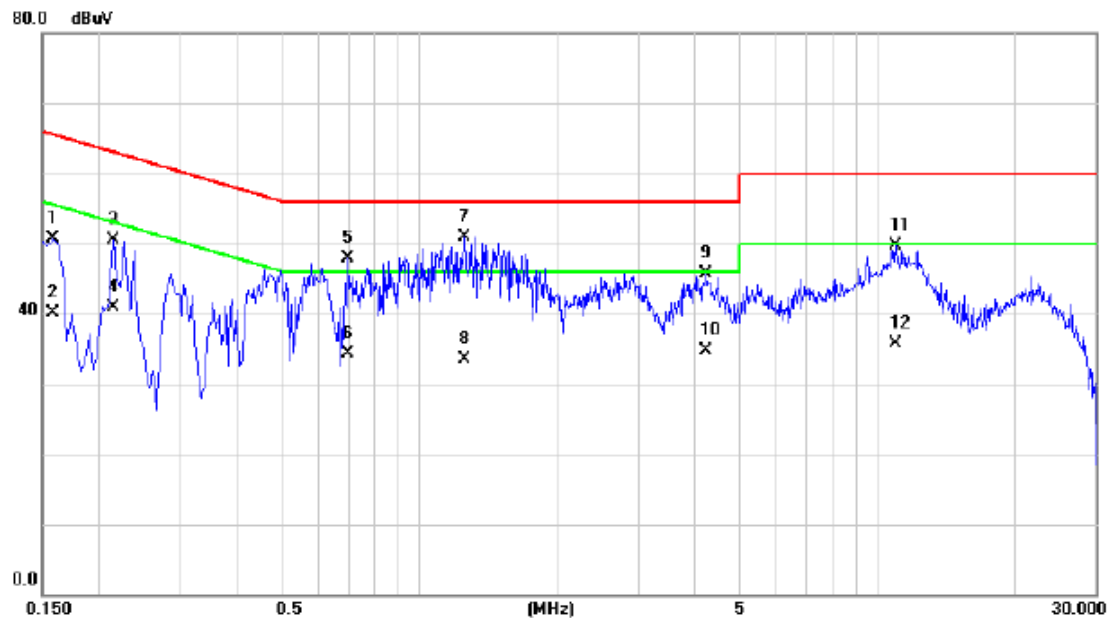


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1580	41.21	9.47	50.68	65.57	-14.89	QP	
2		0.1580	30.70	9.47	40.17	55.57	-15.40	AVG	
3		0.2140	40.92	9.49	50.41	63.05	-12.64	QP	
4		0.2140	31.50	9.49	40.99	53.05	-12.06	AVG	
5		0.6980	38.37	9.54	47.91	56.00	-8.09	QP	
6		0.6980	24.80	9.54	34.34	46.00	-11.66	AVG	
7	*	1.2540	41.34	9.63	50.97	56.00	-5.03	QP	
8		1.2540	23.90	9.63	33.53	46.00	-12.47	AVG	
9		4.2340	35.73	9.89	45.62	56.00	-10.38	QP	
10		4.2340	24.80	9.89	34.69	46.00	-11.31	AVG	
11		10.9700	39.80	9.87	49.67	60.00	-10.33	QP	
12		10.9700	25.90	9.87	35.77	50.00	-14.23	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Vertical

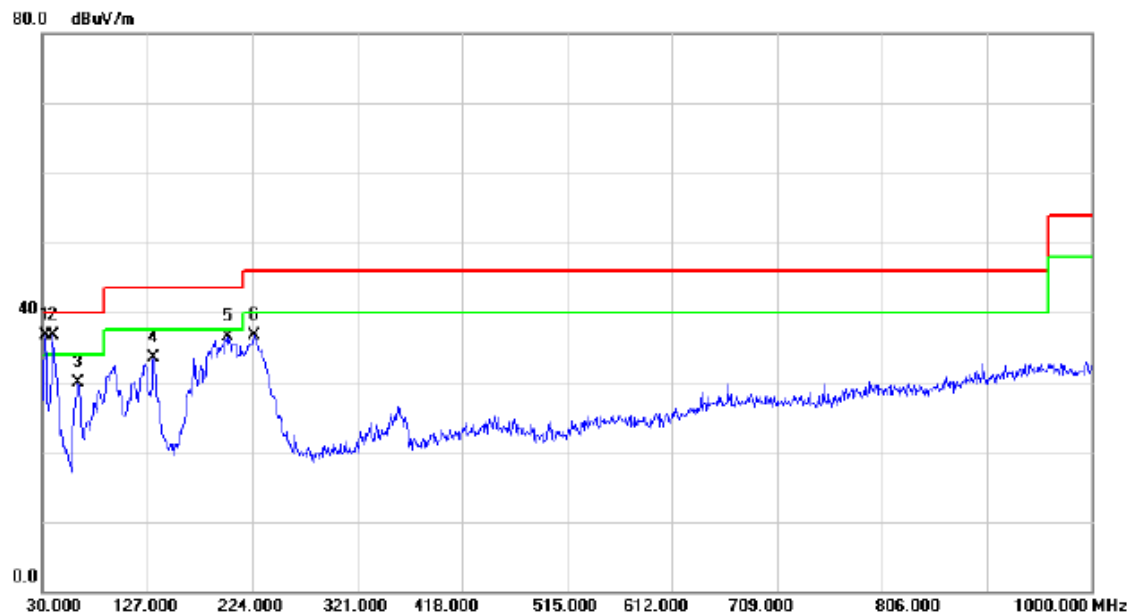

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.9100	50.93	-14.25	36.68	40.00	-3.32	QP	
2	!	39.7000	50.57	-13.96	36.61	40.00	-3.39	QP	
3		62.9800	44.69	-14.80	29.89	40.00	-10.11	QP	
4		132.8200	46.69	-13.20	33.49	43.50	-10.01	QP	
5		200.7200	51.31	-14.85	36.46	43.50	-7.04	QP	
6		225.9400	50.73	-13.94	36.79	46.00	-9.21	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Horizontal

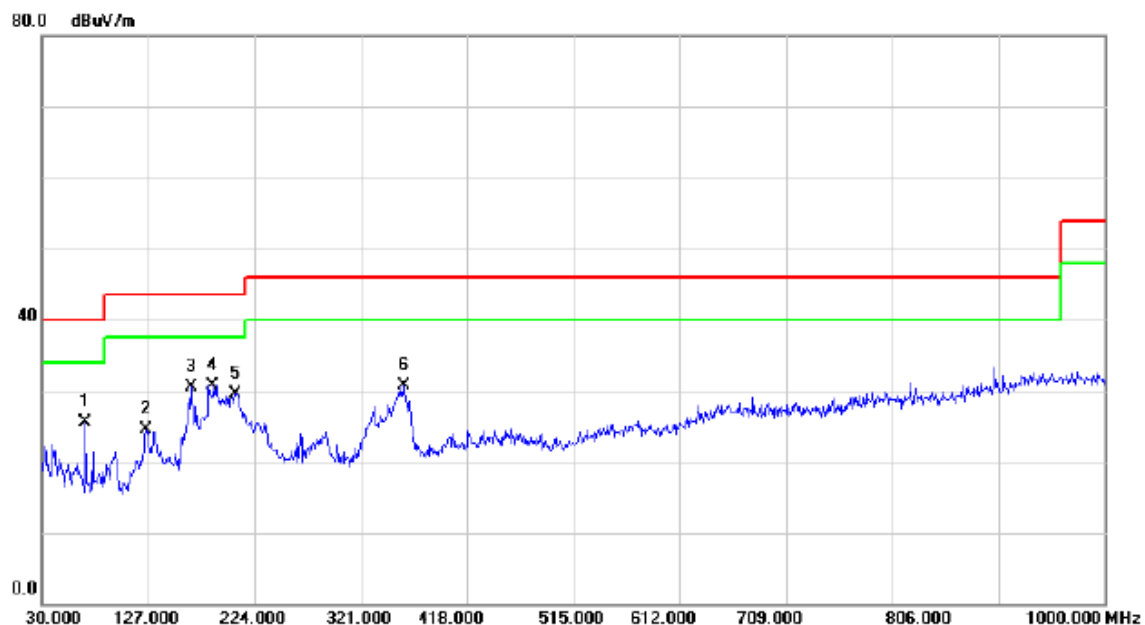

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		69.7700	41.20	-15.77	25.43	40.00	-14.57	QP	
2		125.0600	37.86	-13.35	24.51	43.50	-18.99	QP	
3		165.8000	42.86	-12.35	30.51	43.50	-12.99	QP	
4	*	186.1700	44.31	-13.56	30.75	43.50	-12.75	QP	
5		206.5400	44.10	-14.57	29.53	43.50	-13.97	QP	
6		359.8000	41.05	-10.30	30.75	46.00	-15.25	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: DESAY + Earphone: Lianchuang

Vertical

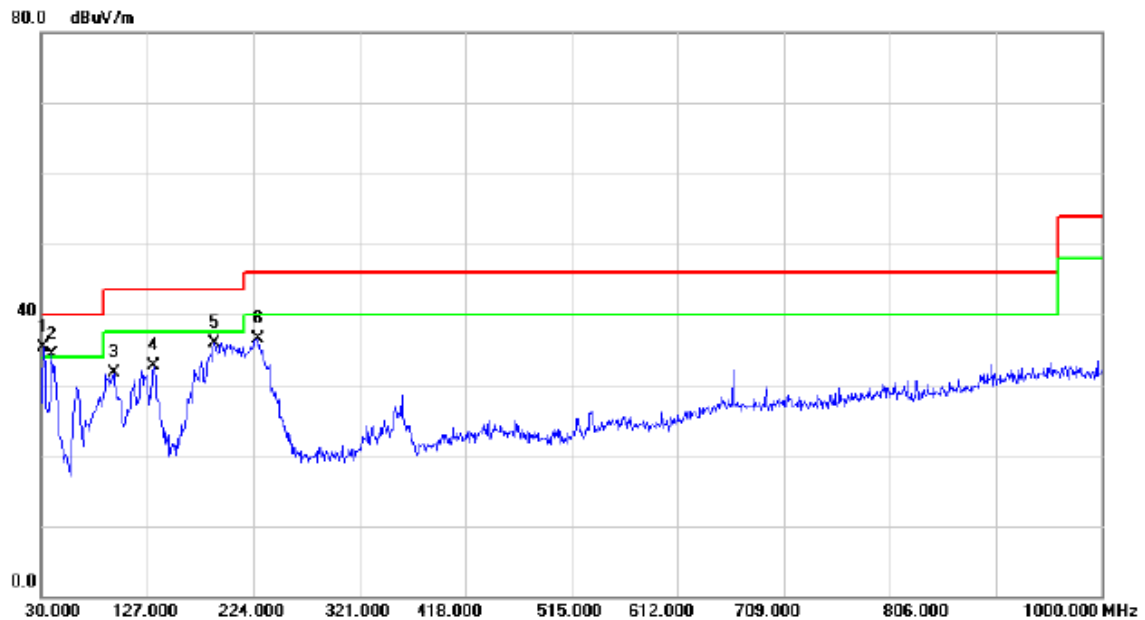

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.73	-14.40	35.33	40.00	-4.67	QP	
2	!	39.7000	48.21	-13.96	34.25	40.00	-5.75	QP	
3		95.9600	48.15	-16.43	31.72	43.50	-11.78	QP	
4		132.8200	46.00	-13.20	32.80	43.50	-10.70	QP	
5		188.1100	49.72	-13.83	35.89	43.50	-7.61	QP	
6		227.8800	50.49	-13.94	36.55	46.00	-9.45	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: DESAY + Earphone: Lianchuang


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		125.0600	38.81	-13.35	25.46	43.50	-18.04	QP	
2		165.8000	42.95	-12.35	30.60	43.50	-12.90	QP	
3		187.1400	44.14	-13.69	30.45	43.50	-13.05	QP	
4		263.7700	38.42	-13.65	24.77	46.00	-21.23	QP	
5		359.8000	42.00	-10.30	31.70	46.00	-14.30	QP	
6	*	663.4100	40.31	-3.64	36.67	46.00	-9.33	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3

Vertical

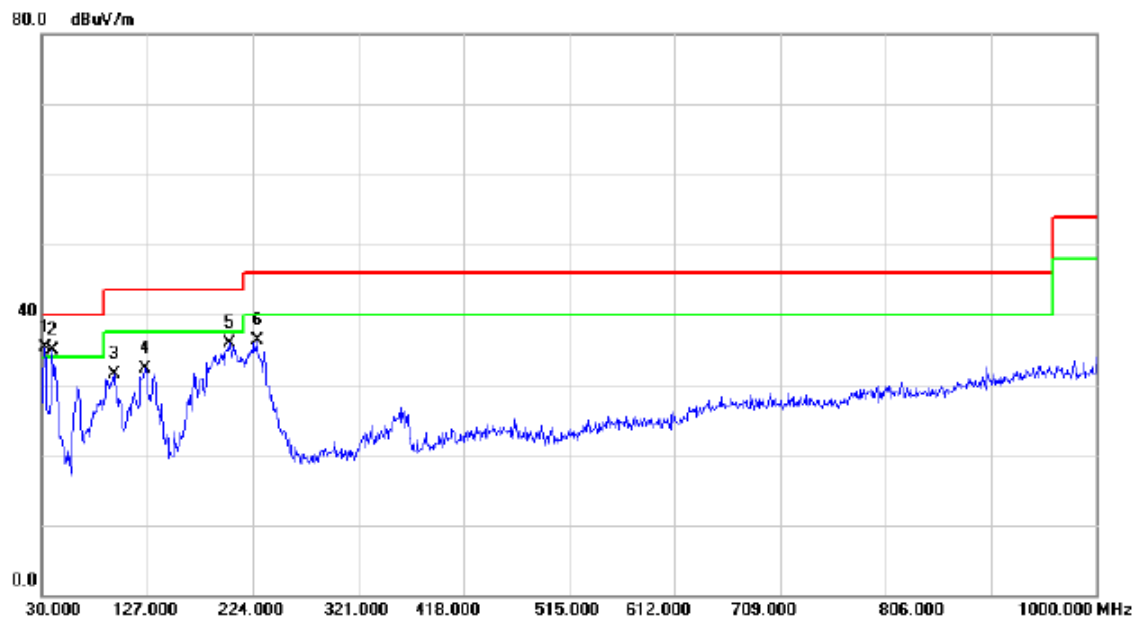

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.9100	49.59	-14.25	35.34	40.00	-4.66	QP	
2	!	39.7000	48.84	-13.96	34.88	40.00	-5.12	QP	
3		95.9600	48.01	-16.43	31.58	43.50	-11.92	QP	
4		125.0600	45.61	-13.35	32.26	43.50	-11.24	QP	
5		202.6600	50.57	-14.76	35.81	43.50	-7.69	QP	
6		227.8800	50.24	-13.94	36.30	46.00	-9.70	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.9100	44.07	-14.25	29.82	40.00	-10.18	QP	
2		41.6400	43.28	-13.68	29.60	40.00	-10.40	QP	
3		95.9600	44.83	-16.43	28.40	43.50	-15.10	QP	
4		165.8000	43.21	-12.35	30.86	43.50	-12.64	QP	
5		199.7500	45.40	-14.87	30.53	43.50	-12.97	QP	
6		359.8000	41.26	-10.30	30.96	46.00	-15.04	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: DESAY + Earphone: GoerTek / HG-04A

Vertical

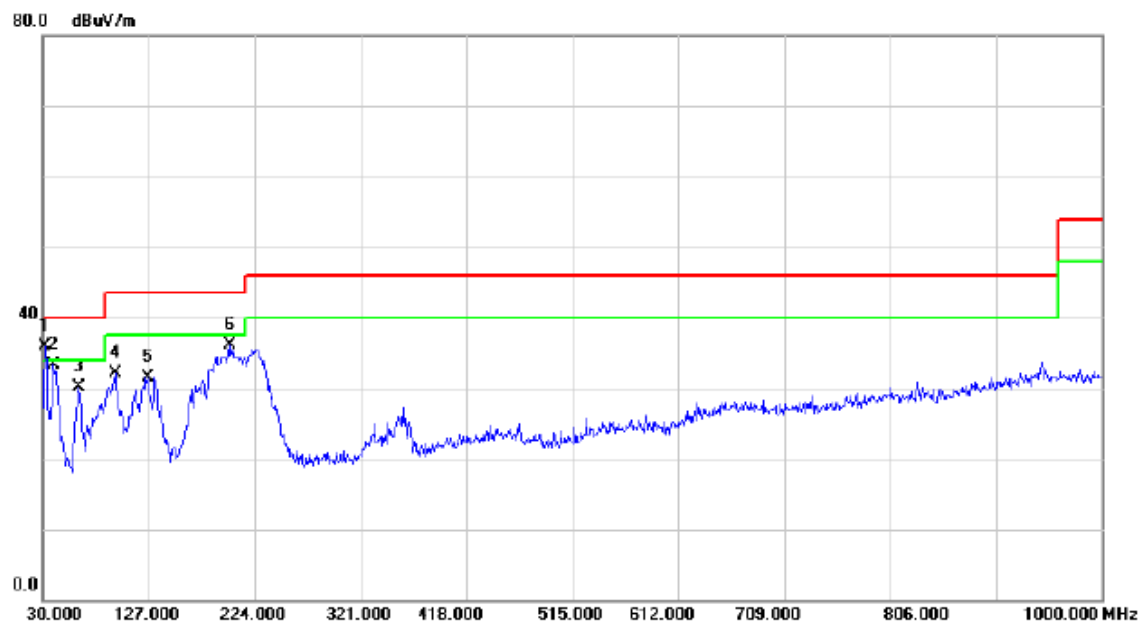

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	50.29	-14.40	35.89	40.00	-4.11	QP	
2		39.7000	47.27	-13.96	33.31	40.00	-6.69	QP	
3		62.9800	44.85	-14.80	30.05	40.00	-9.95	QP	
4		95.9600	48.52	-16.43	32.09	43.50	-11.41	QP	
5		126.0300	44.73	-13.28	31.45	43.50	-12.05	QP	
6		200.7200	50.91	-14.85	36.06	43.50	-7.44	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: DESAY + Earphone: GoerTek / HG-04A


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		125.0600	36.84	-13.35	23.49	43.50	-20.01	QP	
2	*	165.8000	43.62	-12.35	31.27	43.50	-12.23	QP	
3		188.1100	43.40	-13.83	29.57	43.50	-13.93	QP	
4		263.7700	38.62	-13.65	24.97	46.00	-21.03	QP	
5		331.6700	38.80	-10.41	28.39	46.00	-17.61	QP	
6		359.8000	41.15	-10.30	30.85	46.00	-15.15	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY

Vertical

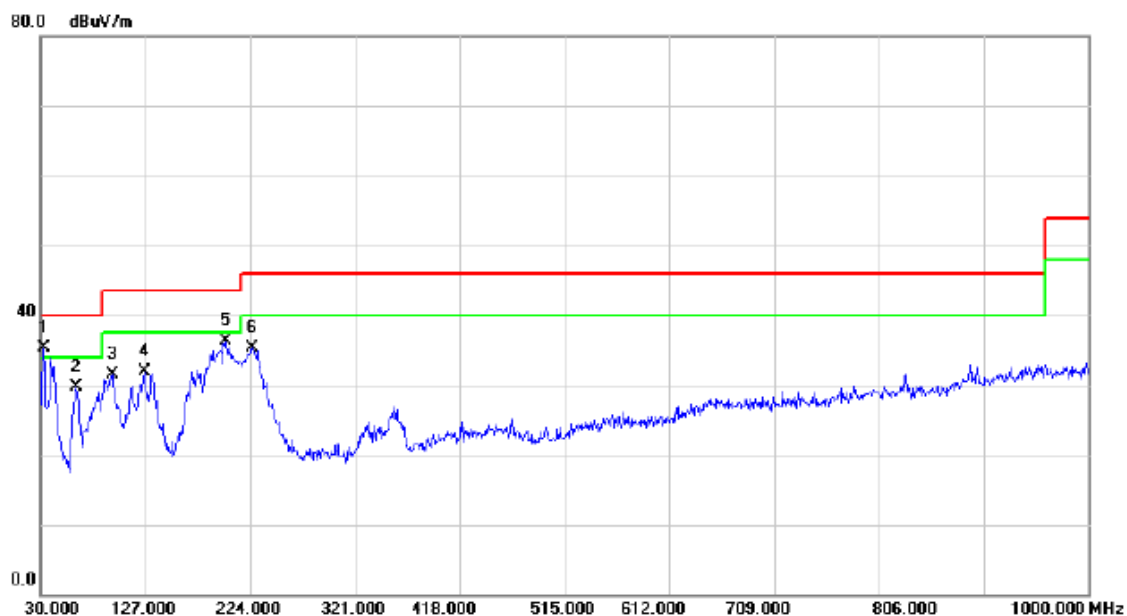

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.9100	49.61	-14.25	35.36	40.00	-4.64	QP	
2		62.9800	44.44	-14.80	29.64	40.00	-10.36	QP	
3		95.9600	47.98	-16.43	31.55	43.50	-11.95	QP	
4		126.0300	45.19	-13.28	31.91	43.50	-11.59	QP	
5		200.7200	51.15	-14.85	36.30	43.50	-7.20	QP	
6		225.9400	49.32	-13.94	35.38	46.00	-10.62	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		126.0300	37.75	-13.28	24.47	43.50	-19.03	QP	
2	*	165.8000	43.26	-12.35	30.91	43.50	-12.59	QP	
3		199.7500	44.79	-14.87	29.92	43.50	-13.58	QP	
4		227.8800	39.01	-13.94	25.07	46.00	-20.93	QP	
5		333.6100	39.26	-10.44	28.82	46.00	-17.18	QP	
6		359.8000	40.91	-10.30	30.61	46.00	-15.39	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

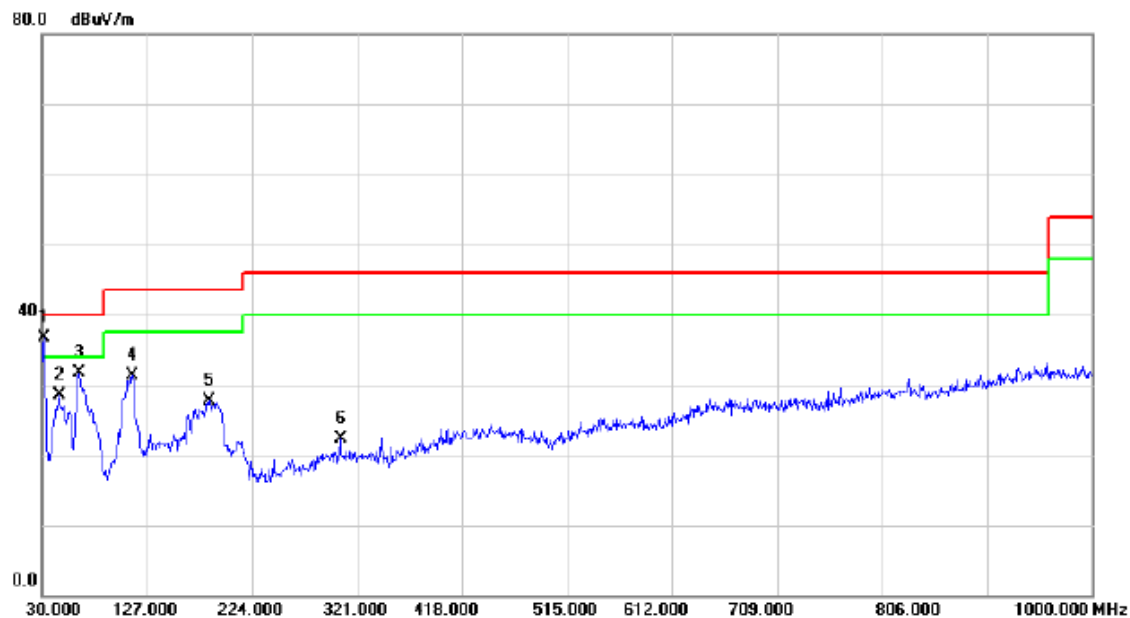

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	51.19	-14.40	36.79	40.00	-3.21	QP	
2		45.5200	41.59	-13.17	28.42	40.00	-11.58	QP	
3		63.9500	46.61	-14.88	31.73	40.00	-8.27	QP	
4		113.4200	45.96	-14.72	31.24	43.50	-12.26	QP	
5		184.2300	41.04	-13.31	27.73	43.50	-15.77	QP	
6		305.4800	32.28	-10.05	22.23	46.00	-23.77	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal

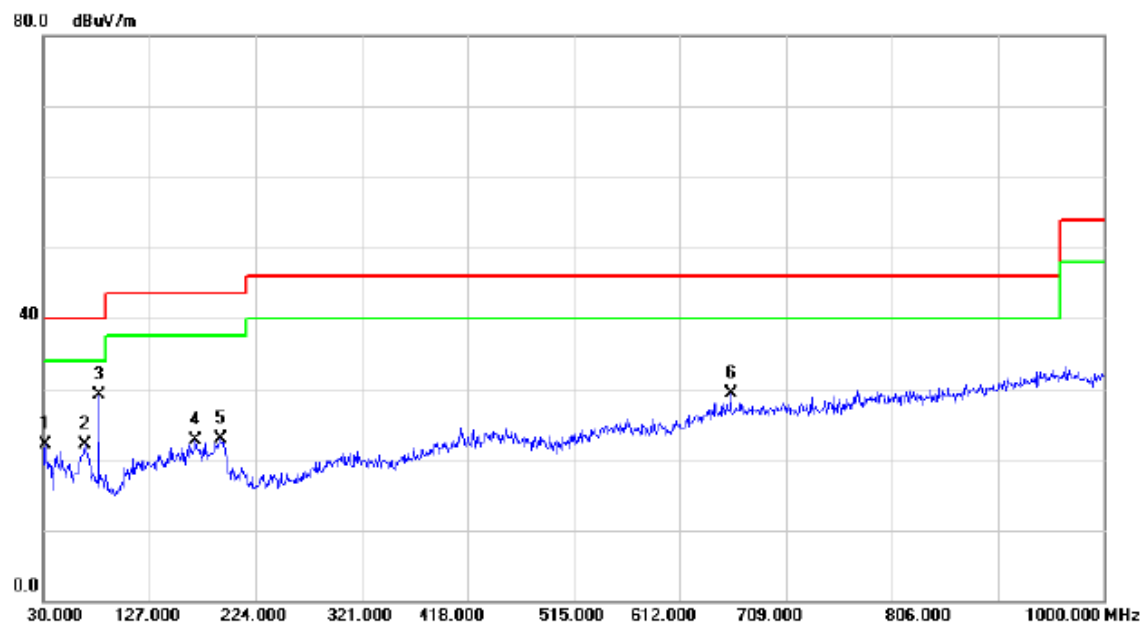

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		31.9400	36.53	-14.40	22.13	40.00	-17.87	QP	
2		67.8300	37.64	-15.45	22.19	40.00	-17.81	QP	
3	*	80.4400	45.71	-16.62	29.09	40.00	-10.91	QP	
4		168.7100	35.09	-12.48	22.61	43.50	-20.89	QP	
5		191.9900	37.22	-14.23	22.99	43.50	-20.51	QP	
6		658.5600	33.01	-3.73	29.28	46.00	-16.72	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

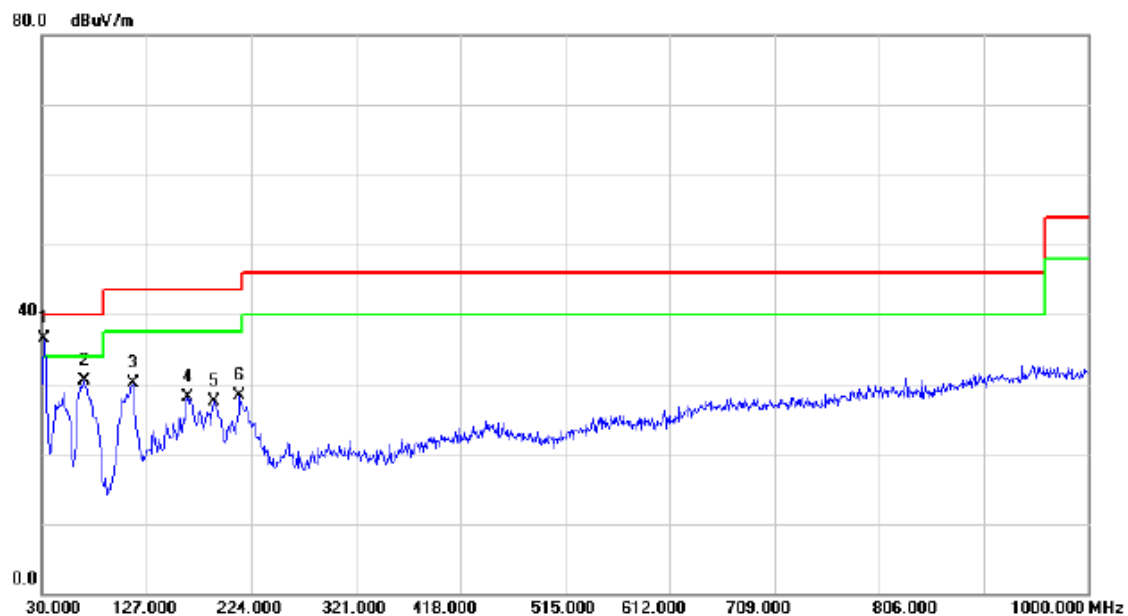

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	31.9400	50.87	-14.40	36.47	40.00	-3.53	QP	
2		68.8000	46.04	-15.60	30.44	40.00	-9.56	QP	
3		114.3900	44.66	-14.59	30.07	43.50	-13.43	QP	
4		164.8300	40.45	-12.32	28.13	43.50	-15.37	QP	
5		189.0800	41.49	-13.94	27.55	43.50	-15.95	QP	
6		213.3300	42.50	-14.25	28.25	43.50	-15.25	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG

Horizontal

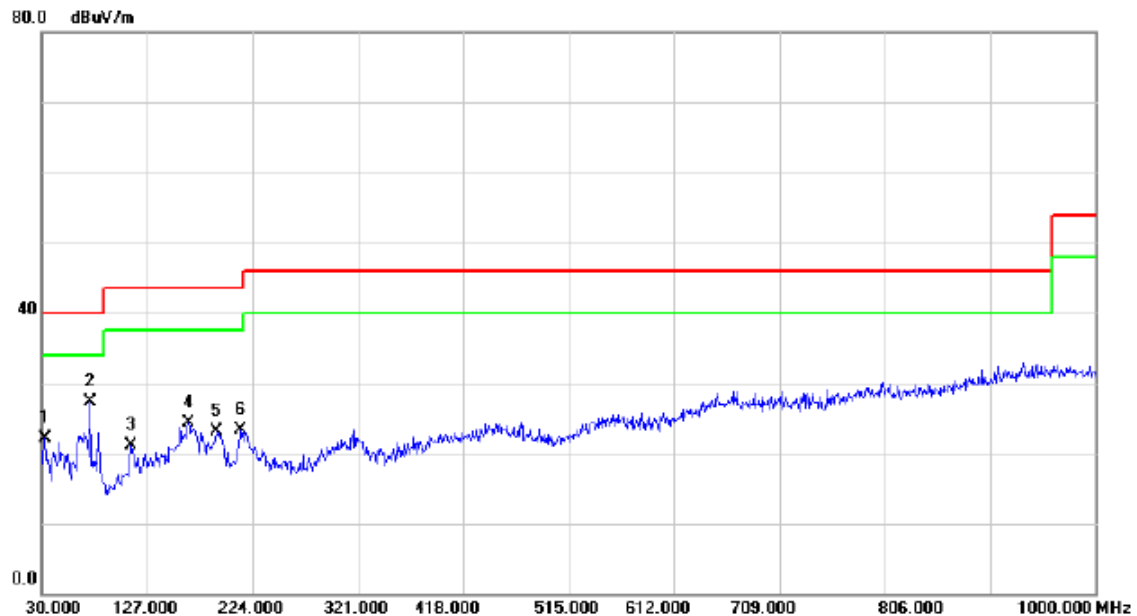

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		32.9100	36.36	-14.25	22.11	40.00	-17.89	QP	
2	*	74.6200	43.41	-16.14	27.27	40.00	-12.73	QP	
3		111.4800	36.16	-15.01	21.15	43.50	-22.35	QP	
4		164.8300	36.56	-12.32	24.24	43.50	-19.26	QP	
5		191.0200	37.16	-14.15	23.01	43.50	-20.49	QP	
6		213.3300	37.54	-14.25	23.29	43.50	-20.21	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	50.81	-14.40	36.41	40.00	-3.59	QP	
2		63.9500	41.45	-14.88	26.57	40.00	-13.43	QP	
3		81.4100	43.97	-16.63	27.34	40.00	-12.66	QP	
4		115.3600	48.21	-14.44	33.77	43.50	-9.73	QP	
5		164.8300	38.29	-12.32	25.97	43.50	-17.53	QP	
6		215.2700	40.59	-14.15	26.44	43.50	-17.06	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	39.49	-14.40	25.09	40.00	-14.91	QP	
2		194.9000	36.76	-14.46	22.30	43.50	-21.20	QP	
3		212.3600	36.69	-14.29	22.40	43.50	-21.10	QP	
4		318.0900	35.20	-10.22	24.98	46.00	-21.02	QP	
5		436.4300	32.25	-7.63	24.62	46.00	-21.38	QP	
6		654.6800	32.76	-3.82	28.94	46.00	-17.06	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	50.11	-14.40	35.71	40.00	-4.29	QP	
2		54.2500	39.42	-13.65	25.77	40.00	-14.23	QP	
3		69.7700	40.67	-15.77	24.90	40.00	-15.10	QP	
4		114.3900	48.42	-14.59	33.83	43.50	-9.67	QP	
5		189.0800	39.73	-13.94	25.79	43.50	-17.71	QP	
6		214.3000	39.55	-14.20	25.35	43.50	-18.15	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD


Horizontal

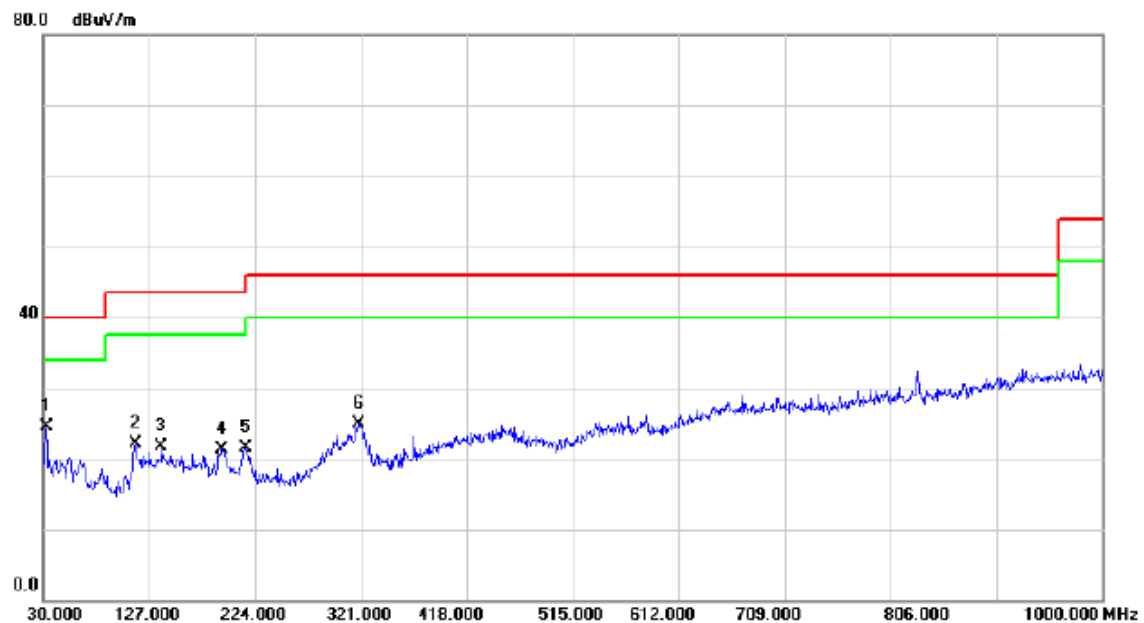

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.9100	38.69	-14.25	24.44	40.00	-15.56	QP	
2		114.3900	36.69	-14.59	22.10	43.50	-21.40	QP	
3		138.6400	35.46	-13.68	21.78	43.50	-21.72	QP	
4		192.9600	35.68	-14.31	21.37	43.50	-22.13	QP	
5		215.2700	35.65	-14.15	21.50	43.50	-22.00	QP	
6		319.0600	35.13	-10.24	24.89	46.00	-21.11	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG

Vertical

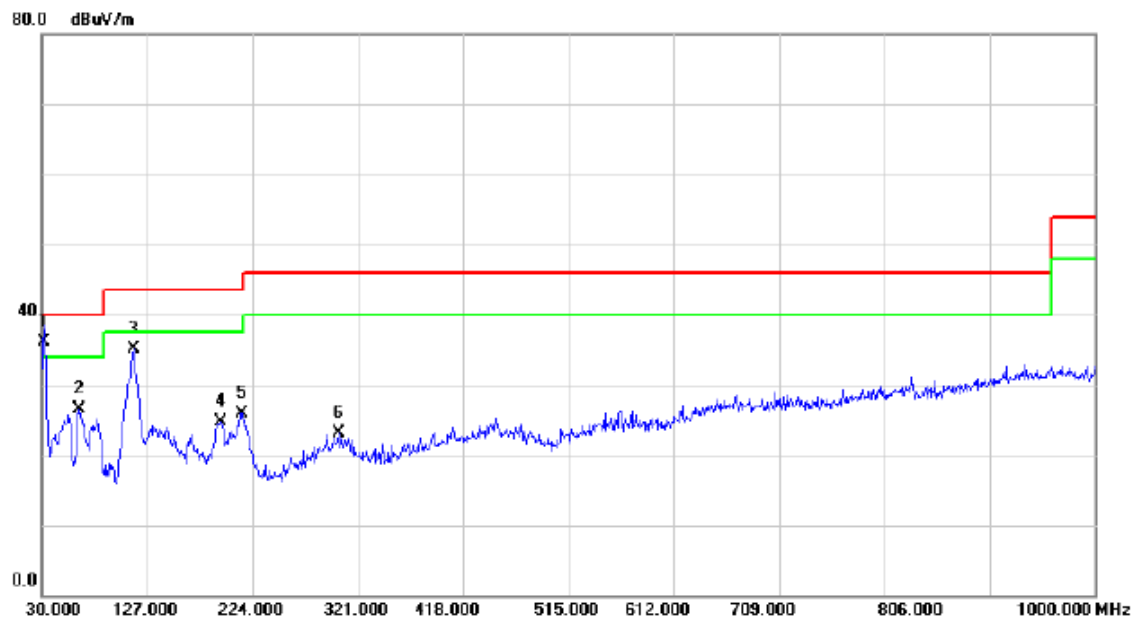

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	50.56	-14.40	36.16	40.00	-3.84	QP	
2		63.9500	41.43	-14.88	26.55	40.00	-13.45	QP	
3		114.3900	49.65	-14.59	35.06	43.50	-8.44	QP	
4		194.9000	39.24	-14.46	24.78	43.50	-18.72	QP	
5		214.3000	40.03	-14.20	25.83	43.50	-17.67	QP	
6		303.5400	33.13	-10.01	23.12	46.00	-22.88	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	38.46	-14.40	24.06	40.00	-15.94	QP	
2		192.9600	37.23	-14.31	22.92	43.50	-20.58	QP	
3		212.3600	37.18	-14.29	22.89	43.50	-20.61	QP	
4		318.0900	35.87	-10.22	25.65	46.00	-20.35	QP	
5		459.7100	32.16	-7.59	24.57	46.00	-21.43	QP	
6		650.8000	32.45	-3.90	28.55	46.00	-17.45	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD

Vertical

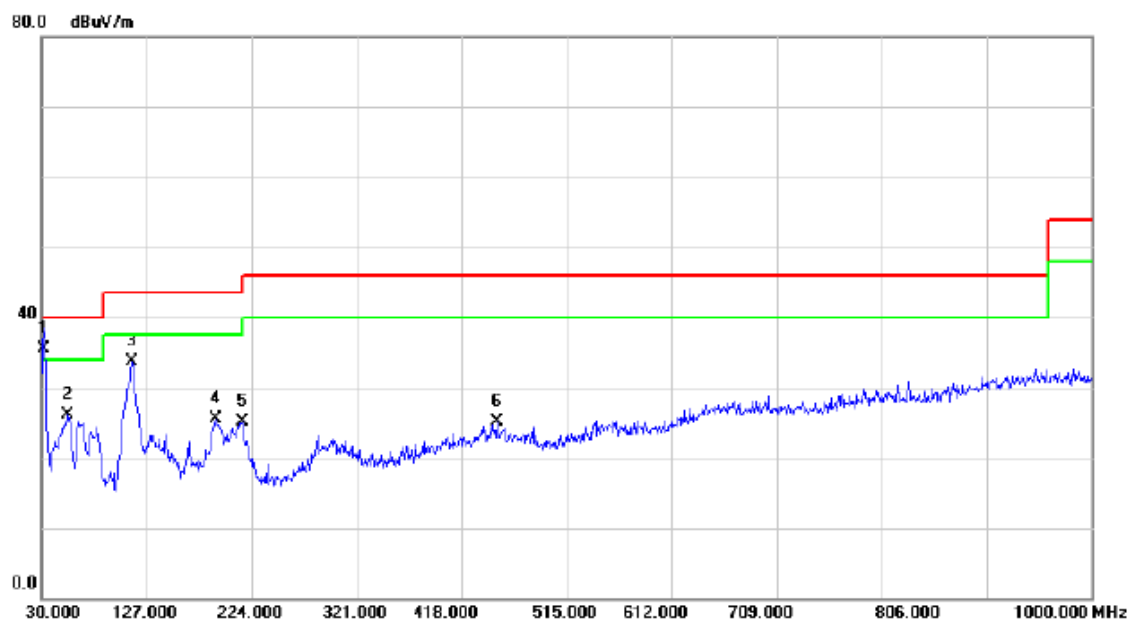

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.91	-14.40	35.51	40.00	-4.49	QP	
2		54.2500	39.80	-13.65	26.15	40.00	-13.85	QP	
3		113.4200	48.50	-14.72	33.78	43.50	-9.72	QP	
4		191.0200	39.66	-14.15	25.51	43.50	-17.99	QP	
5		215.2700	39.27	-14.15	25.12	43.50	-18.38	QP	
6		450.9800	32.37	-7.27	25.10	46.00	-20.90	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	39.08	-14.40	24.68	40.00	-15.32	QP	
2		114.3900	35.93	-14.59	21.34	43.50	-22.16	QP	
3		193.9300	35.39	-14.39	21.00	43.50	-22.50	QP	
4		320.0300	34.10	-10.25	23.85	46.00	-22.15	QP	
5		448.0700	31.70	-7.29	24.41	46.00	-21.59	QP	
6		704.1500	31.69	-2.92	28.77	46.00	-17.23	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	50.11	-14.40	35.71	40.00	-4.29	QP	
2		69.7700	42.30	-15.77	26.53	40.00	-13.47	QP	
3		114.3900	49.58	-14.59	34.99	43.50	-8.51	QP	
4		132.8200	37.85	-13.20	24.65	43.50	-18.85	QP	
5		193.9300	38.75	-14.39	24.36	43.50	-19.14	QP	
6		213.3300	39.24	-14.25	24.99	43.50	-18.51	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD

Horizontal

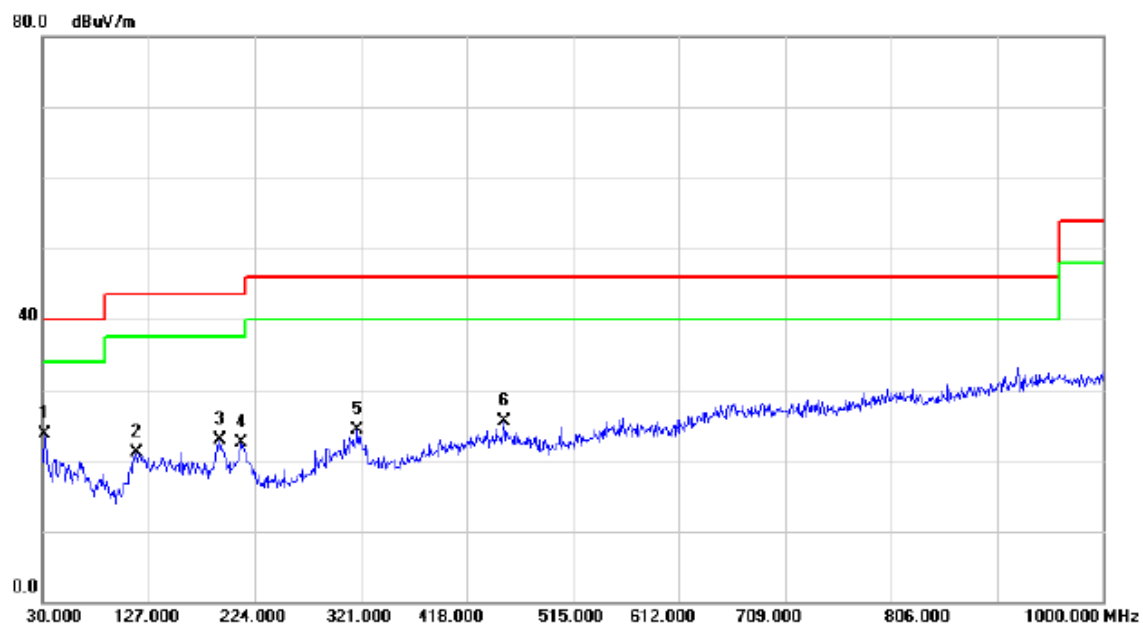


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	38.16	-14.40	23.76	40.00	-16.24	QP	
2		115.3600	35.53	-14.44	21.09	43.50	-22.41	QP	
3		191.9900	37.15	-14.23	22.92	43.50	-20.58	QP	
4		211.3900	36.75	-14.34	22.41	43.50	-21.09	QP	
5		318.0900	34.53	-10.22	24.31	46.00	-21.69	QP	
6		451.9500	32.87	-7.30	25.57	46.00	-20.43	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Vertical

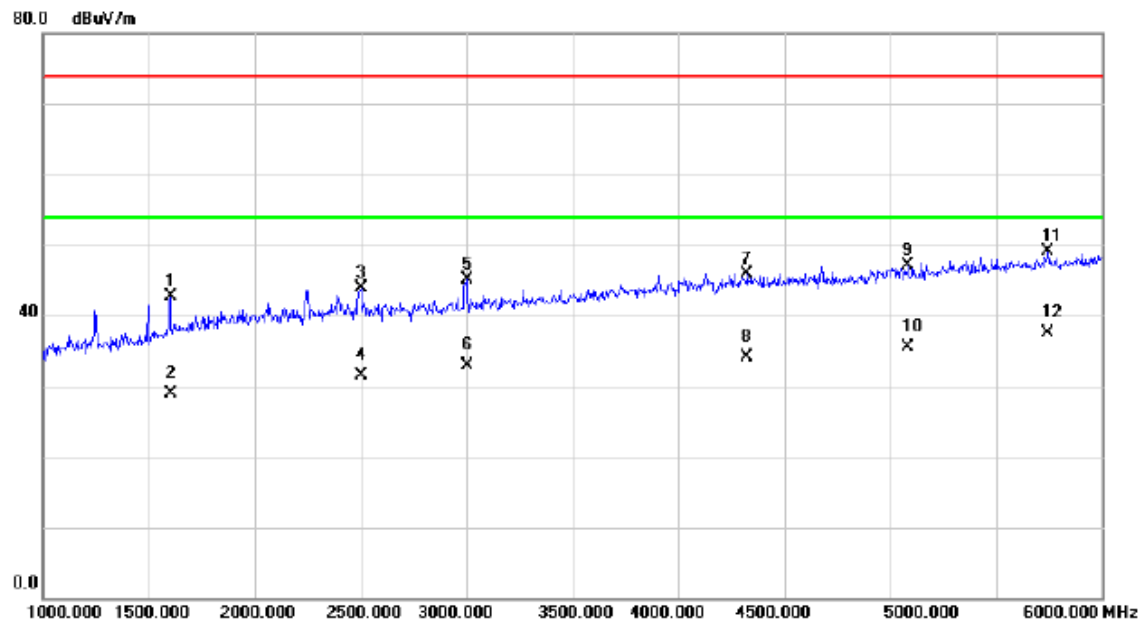

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1600.000	46.46	-3.69	42.77	74.00	-31.23	peak	
2		1600.000	32.54	-3.69	28.85	54.00	-25.15	AVG	
3		2500.000	43.69	0.14	43.83	74.00	-30.17	peak	
4		2500.000	31.37	0.14	31.51	54.00	-22.49	AVG	
5		3000.000	43.78	1.39	45.17	74.00	-28.83	peak	
6		3000.000	31.49	1.39	32.88	54.00	-21.12	AVG	
7		4325.000	40.42	5.57	45.99	74.00	-28.01	peak	
8		4325.000	28.56	5.57	34.13	54.00	-19.87	AVG	
9		5085.000	39.33	7.68	47.01	74.00	-26.99	peak	
10		5085.000	27.85	7.68	35.53	54.00	-18.47	AVG	
11		5745.000	39.12	9.93	49.05	74.00	-24.95	peak	
12	*	5745.000	27.58	9.93	37.51	54.00	-16.49	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Horizontal

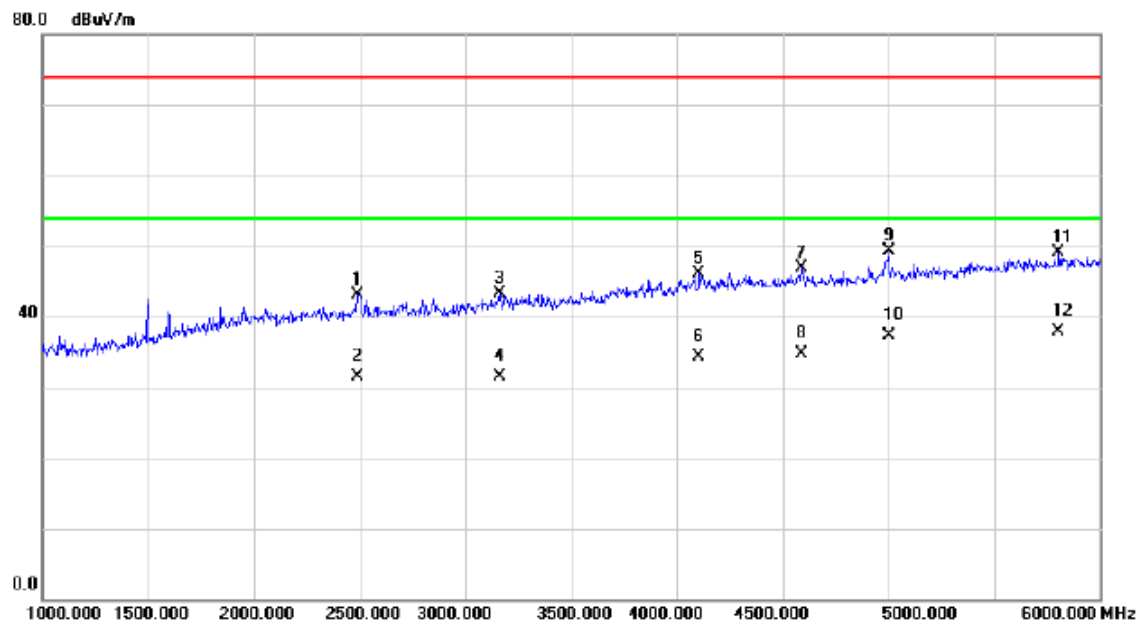

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2490.000	43.03	0.12	43.15	74.00	-30.85	peak	
2		2490.000	31.35	0.12	31.47	54.00	-22.53	AVG	
3		3160.000	41.36	1.94	43.30	74.00	-30.70	peak	
4		3160.000	29.52	1.94	31.46	54.00	-22.54	AVG	
5		4105.000	40.94	5.22	46.16	74.00	-27.84	peak	
6		4105.000	29.03	5.22	34.25	54.00	-19.75	AVG	
7		4590.000	40.71	6.12	46.83	74.00	-27.17	peak	
8		4590.000	28.56	6.12	34.68	54.00	-19.32	AVG	
9		5000.000	41.96	7.35	49.31	74.00	-24.69	peak	
10		5000.000	30.00	7.35	37.35	54.00	-16.65	AVG	
11		5805.000	39.07	10.11	49.18	74.00	-24.82	peak	
12	*	5805.000	27.80	10.11	37.91	54.00	-16.09	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: DESAY + Earphone: Lianchuang


Vertical

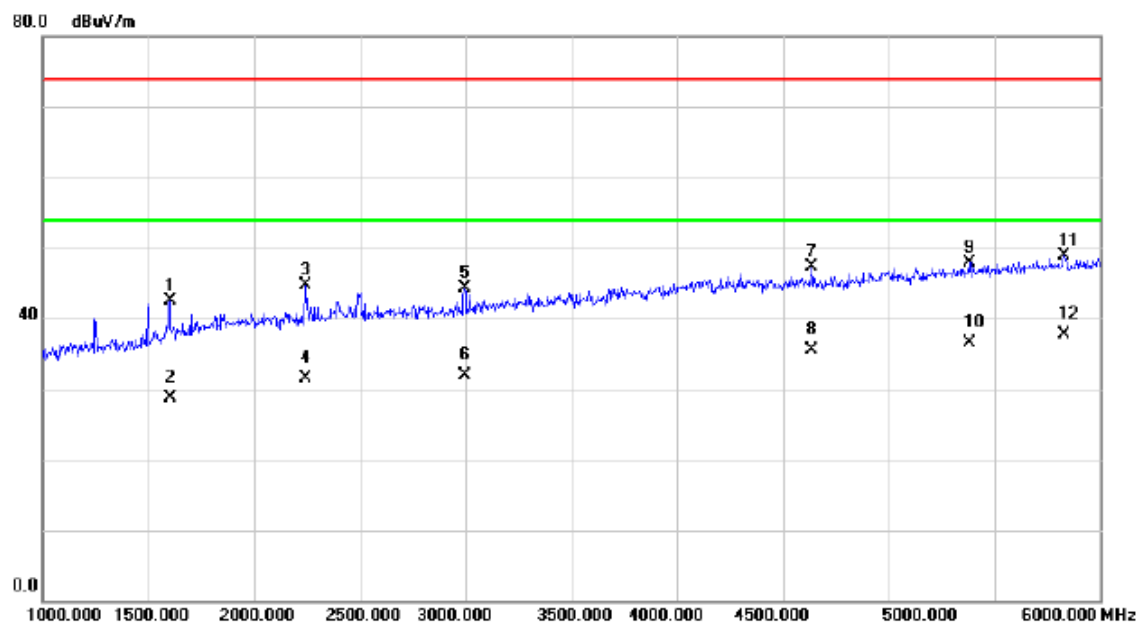

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1600.000	46.16	-3.69	42.47	74.00	-31.53	peak	
2		1600.000	32.44	-3.69	28.75	54.00	-25.25	AVG	
3		2240.000	45.03	-0.26	44.77	74.00	-29.23	peak	
4		2240.000	31.79	-0.26	31.53	54.00	-22.47	AVG	
5		2995.000	42.86	1.37	44.23	74.00	-29.77	peak	
6		2995.000	30.59	1.37	31.96	54.00	-22.04	AVG	
7		4635.000	41.06	6.25	47.31	74.00	-26.69	peak	
8		4635.000	29.18	6.25	35.43	54.00	-18.57	AVG	
9		5380.000	39.05	8.80	47.85	74.00	-26.15	peak	
10		5380.000	27.65	8.80	36.45	54.00	-17.55	AVG	
11		5830.000	38.76	10.17	48.93	74.00	-25.07	peak	
12	*	5830.000	27.44	10.17	37.61	54.00	-16.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: DESAY + Earphone: Lianchuang


Horizontal

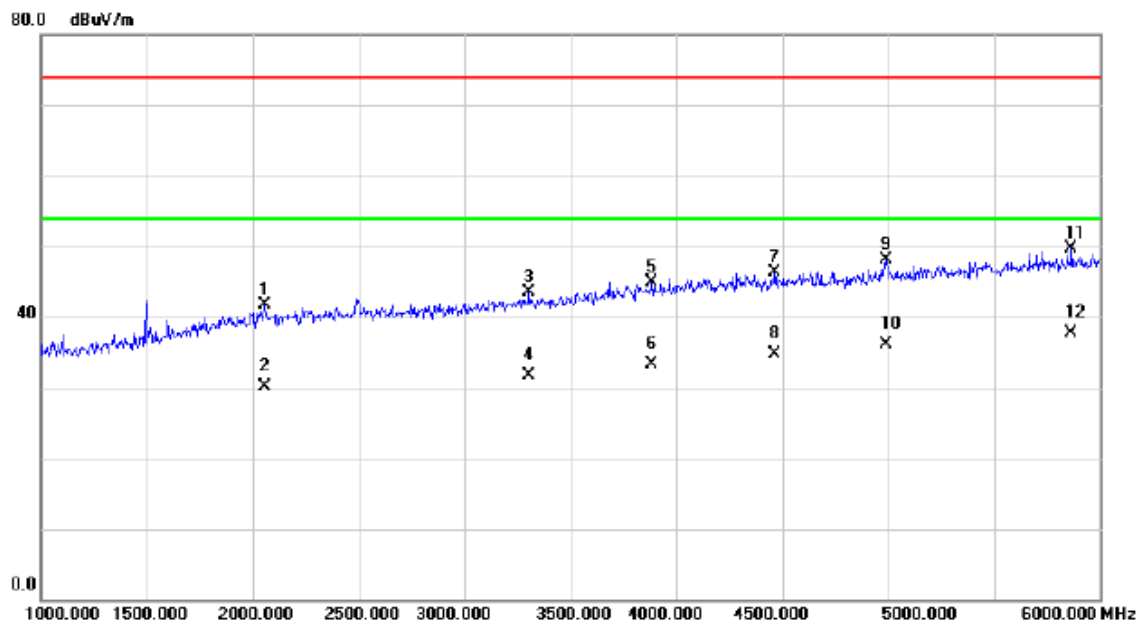

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2055.000	42.22	-0.53	41.69	74.00	-32.31	peak	
2		2055.000	30.57	-0.53	30.04	54.00	-23.96	AVG	
3		3305.000	41.12	2.43	43.55	74.00	-30.45	peak	
4		3305.000	29.26	2.43	31.69	54.00	-22.31	AVG	
5		3885.000	40.38	4.62	45.00	74.00	-29.00	peak	
6		3885.000	28.67	4.62	33.29	54.00	-20.71	AVG	
7		4465.000	40.51	5.79	46.30	74.00	-27.70	peak	
8		4465.000	28.88	5.79	34.67	54.00	-19.33	AVG	
9		4990.000	40.75	7.32	48.07	74.00	-25.93	peak	
10		4990.000	28.82	7.32	36.14	54.00	-17.86	AVG	
11		5865.000	39.39	10.27	49.66	74.00	-24.34	peak	
12	*	5865.000	27.51	10.27	37.78	54.00	-16.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Vertical

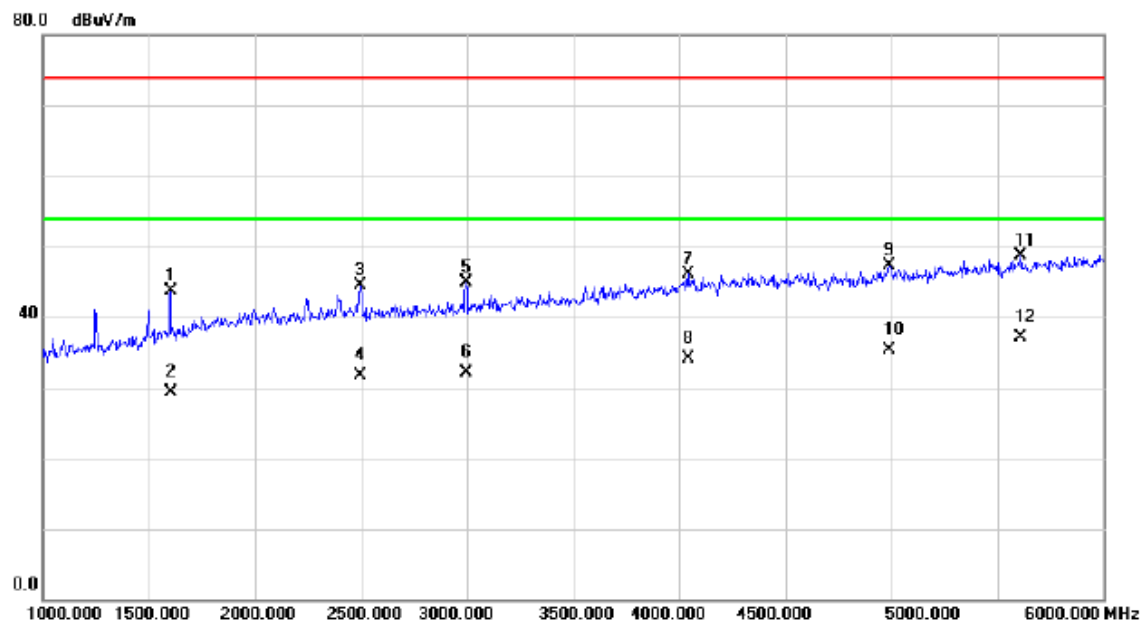

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1600.000	47.35	-3.69	43.66	74.00	-30.34	peak	
2		1600.000	33.03	-3.69	29.34	54.00	-24.66	AVG	
3		2495.000	44.38	0.14	44.52	74.00	-29.48	peak	
4		2495.000	31.47	0.14	31.61	54.00	-22.39	AVG	
5		2995.000	43.48	1.37	44.85	74.00	-29.15	peak	
6		2995.000	30.81	1.37	32.18	54.00	-21.82	AVG	
7		4040.000	40.96	5.12	46.08	74.00	-27.92	peak	
8		4040.000	29.08	5.12	34.20	54.00	-19.80	AVG	
9		4990.000	39.92	7.32	47.24	74.00	-26.76	peak	
10		4990.000	27.96	7.32	35.28	54.00	-18.72	AVG	
11		5610.000	39.14	9.57	48.71	74.00	-25.29	peak	
12	*	5610.000	27.46	9.57	37.03	54.00	-16.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Horizontal

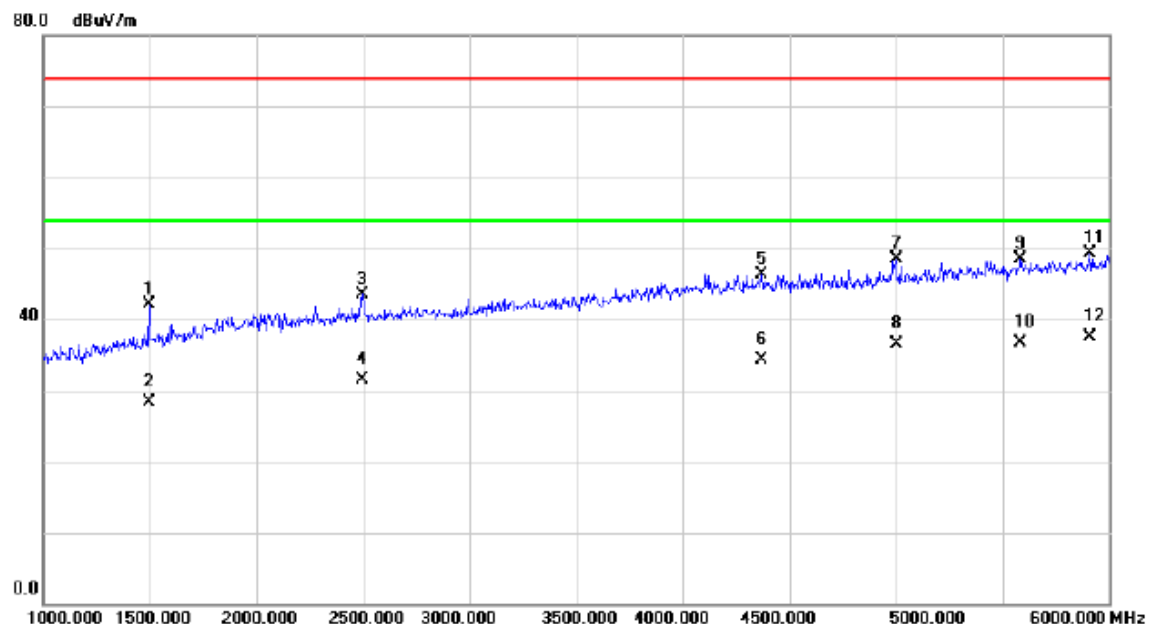

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	46.63	-4.49	42.14	74.00	-31.86	peak	
2		1495.000	32.74	-4.49	28.25	54.00	-25.75	AVG	
3		2495.000	43.46	0.14	43.60	74.00	-30.40	peak	
4		2495.000	31.37	0.14	31.51	54.00	-22.49	AVG	
5		4370.000	40.60	5.63	46.23	74.00	-27.77	peak	
6		4370.000	28.71	5.63	34.34	54.00	-19.66	AVG	
7		5000.000	41.14	7.35	48.49	74.00	-25.51	peak	
8		5000.000	29.25	7.35	36.60	54.00	-17.40	AVG	
9		5585.000	39.01	9.50	48.51	74.00	-25.49	peak	
10		5585.000	27.26	9.50	36.76	54.00	-17.24	AVG	
11		5910.000	38.92	10.39	49.31	74.00	-24.69	peak	
12	*	5910.000	27.08	10.39	37.47	54.00	-16.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: DESAY + Earphone: GoerTek / HG-04A


Vertical

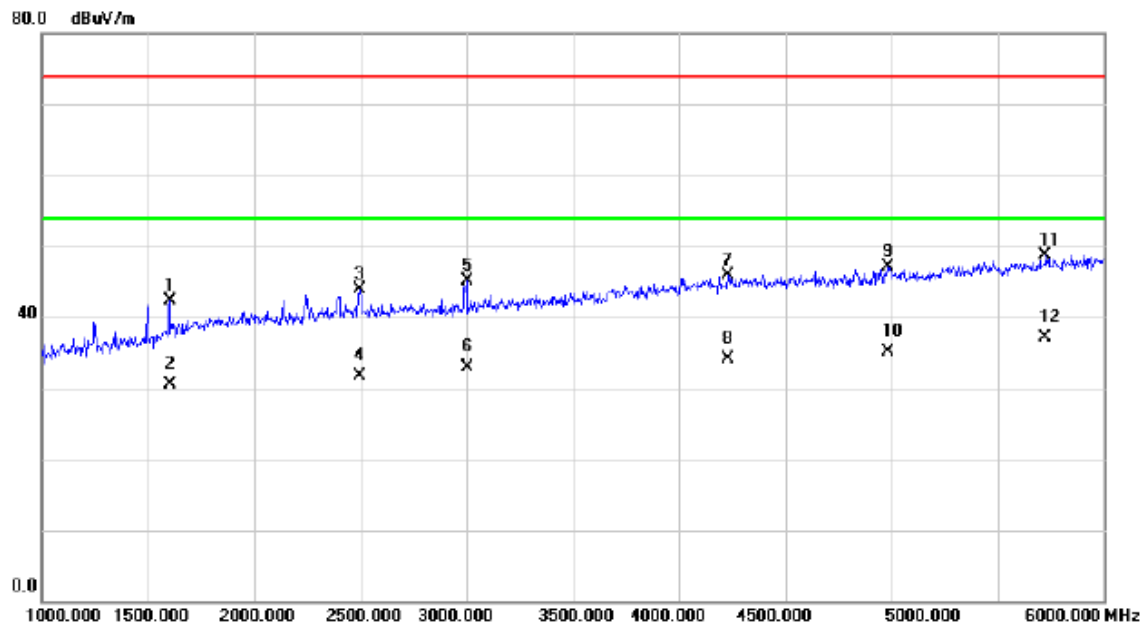

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1600.000	46.01	-3.69	42.32	74.00	-31.68	peak	
2		1600.000	34.27	-3.69	30.58	54.00	-23.42	AVG	
3		2495.000	43.67	0.14	43.81	74.00	-30.19	peak	
4		2495.000	31.47	0.14	31.61	54.00	-22.39	AVG	
5		3000.000	43.65	1.39	45.04	74.00	-28.96	peak	
6		3000.000	31.55	1.39	32.94	54.00	-21.06	AVG	
7		4230.000	40.49	5.42	45.91	74.00	-28.09	peak	
8		4230.000	28.60	5.42	34.02	54.00	-19.98	AVG	
9		4985.000	39.76	7.30	47.06	74.00	-26.94	peak	
10		4985.000	27.78	7.30	35.08	54.00	-18.92	AVG	
11		5725.000	38.82	9.88	48.70	74.00	-25.30	peak	
12	*	5725.000	27.22	9.88	37.10	54.00	-16.90	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: DESAY + Earphone: GoerTek / HG-04A


Horizontal

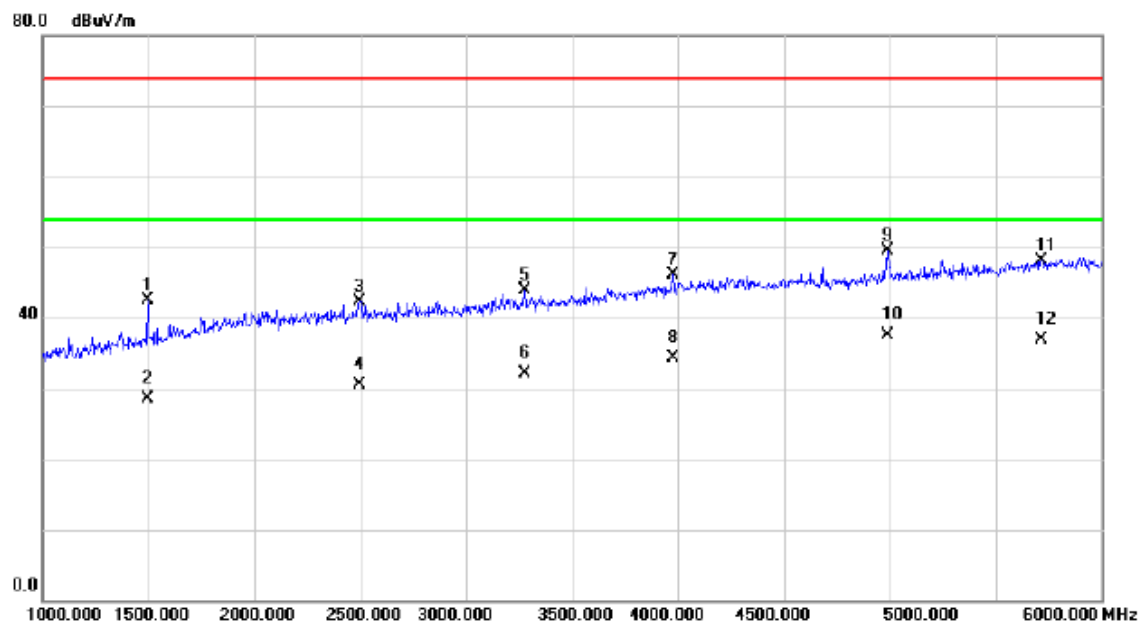

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	46.90	-4.49	42.41	74.00	-31.59	peak	
2		1495.000	33.09	-4.49	28.60	54.00	-25.40	AVG	
3		2495.000	42.23	0.14	42.37	74.00	-31.63	peak	
4		2495.000	30.46	0.14	30.60	54.00	-23.40	AVG	
5		3275.000	41.59	2.33	43.92	74.00	-30.08	peak	
6		3275.000	29.73	2.33	32.06	54.00	-21.94	AVG	
7		3975.000	41.07	4.97	46.04	74.00	-27.96	peak	
8		3975.000	29.33	4.97	34.30	54.00	-19.70	AVG	
9		4990.000	42.10	7.32	49.42	74.00	-24.58	peak	
10	*	4990.000	30.24	7.32	37.56	54.00	-16.44	AVG	
11		5715.000	38.29	9.85	48.14	74.00	-25.86	peak	
12		5715.000	27.11	9.85	36.96	54.00	-17.04	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Vertical

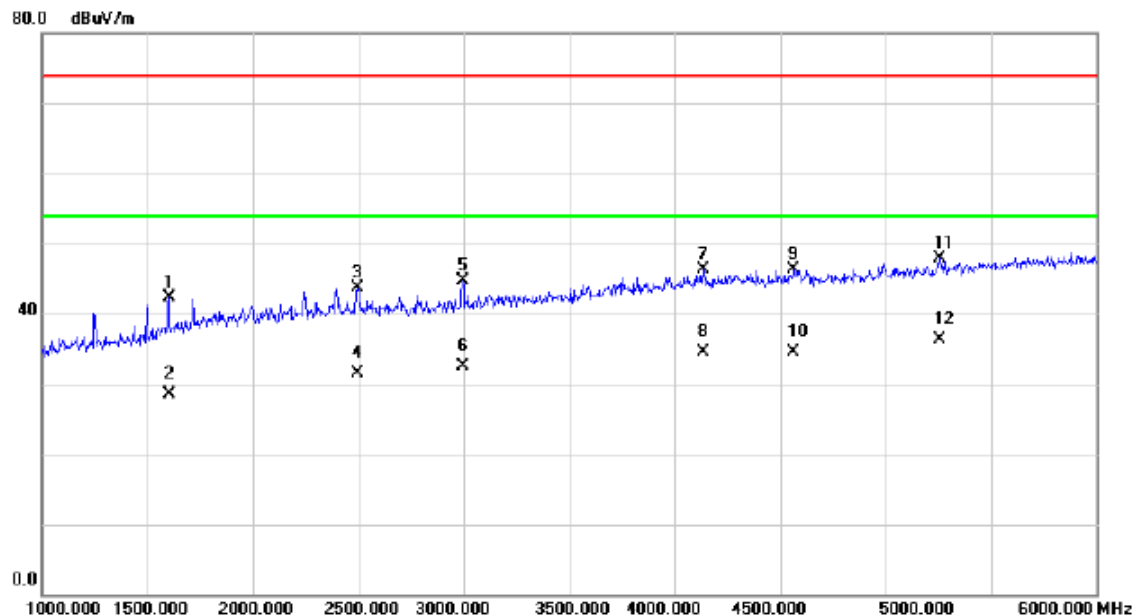

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1600.000	46.02	-3.69	42.33	74.00	-31.67	peak	
2		1600.000	32.23	-3.69	28.54	54.00	-25.46	AVG	
3		2495.000	43.63	0.14	43.77	74.00	-30.23	peak	
4		2495.000	31.37	0.14	31.51	54.00	-22.49	AVG	
5		2995.000	43.40	1.37	44.77	74.00	-29.23	peak	
6		2995.000	31.15	1.37	32.52	54.00	-21.48	AVG	
7		4135.000	41.11	5.27	46.38	74.00	-27.62	peak	
8		4135.000	29.33	5.27	34.60	54.00	-19.40	AVG	
9		4565.000	40.23	6.04	46.27	74.00	-27.73	peak	
10		4565.000	28.40	6.04	34.44	54.00	-19.56	AVG	
11		5255.000	39.59	8.33	47.92	74.00	-26.08	peak	
12	*	5255.000	27.90	8.33	36.23	54.00	-17.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Horizontal

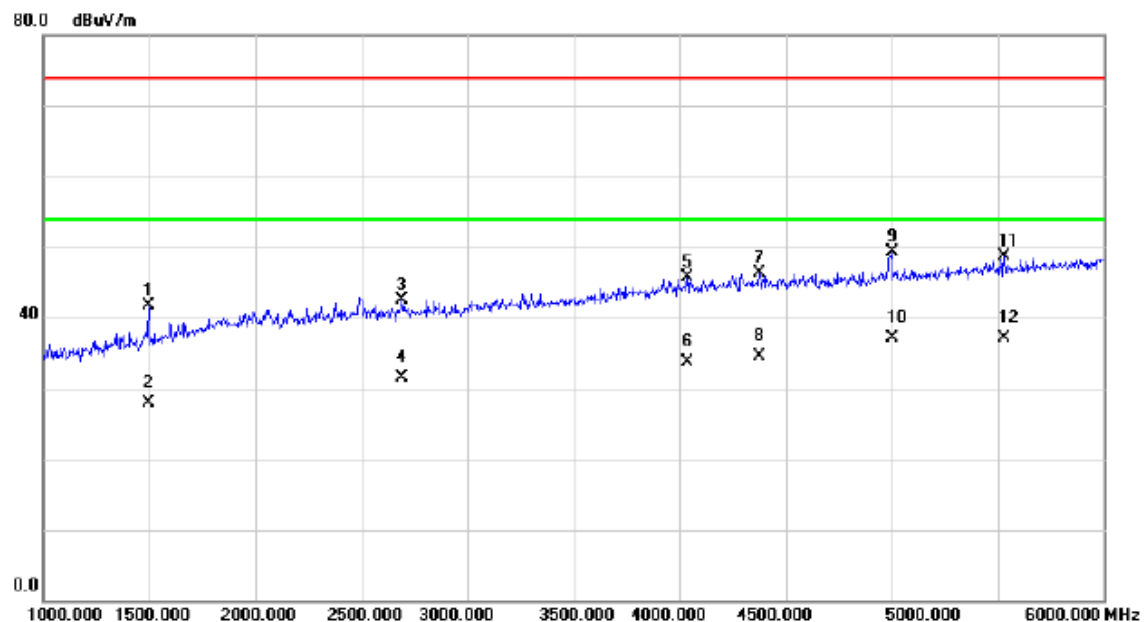

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	46.15	-4.49	41.66	74.00	-32.34	peak	
2		1495.000	32.37	-4.49	27.88	54.00	-26.12	AVG	
3		2690.000	41.85	0.61	42.46	74.00	-31.54	peak	
4		2690.000	30.93	0.61	31.54	54.00	-22.46	AVG	
5		4035.000	40.52	5.12	45.64	74.00	-28.36	peak	
6		4035.000	28.67	5.12	33.79	54.00	-20.21	AVG	
7		4375.000	40.67	5.65	46.32	74.00	-27.68	peak	
8		4375.000	28.80	5.65	34.45	54.00	-19.55	AVG	
9		5000.000	41.89	7.35	49.24	74.00	-24.76	peak	
10	*	5000.000	29.66	7.35	37.01	54.00	-16.99	AVG	
11		5530.000	39.39	9.35	48.74	74.00	-25.26	peak	
12		5530.000	27.66	9.35	37.01	54.00	-16.99	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

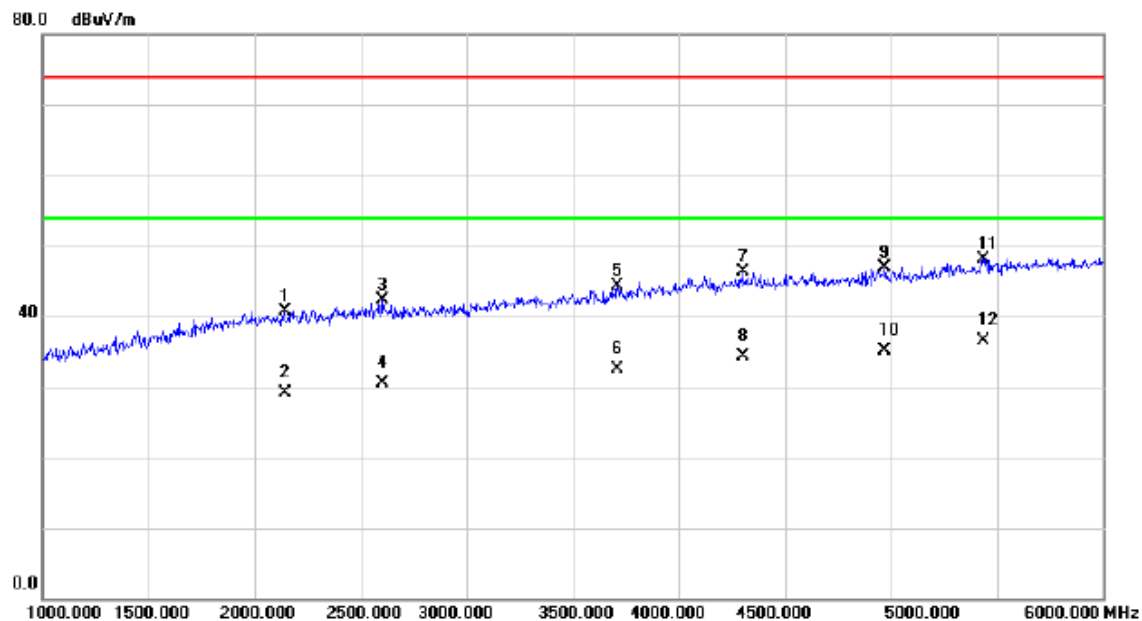

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2140.000	41.03	-0.40	40.63	74.00	-33.37	peak	
2		2140.000	29.54	-0.40	29.14	54.00	-24.86	AVG	
3		2605.000	41.98	0.40	42.38	74.00	-31.62	peak	
4		2605.000	30.15	0.40	30.55	54.00	-23.45	AVG	
5		3710.000	40.46	3.93	44.39	74.00	-29.61	peak	
6		3710.000	28.53	3.93	32.46	54.00	-21.54	AVG	
7		4300.000	40.83	5.53	46.36	74.00	-27.64	peak	
8		4300.000	28.78	5.53	34.31	54.00	-19.69	AVG	
9		4970.000	39.58	7.26	46.84	74.00	-27.16	peak	
10		4970.000	27.89	7.26	35.15	54.00	-18.85	AVG	
11		5435.000	39.18	9.01	48.19	74.00	-25.81	peak	
12	*	5435.000	27.41	9.01	36.42	54.00	-17.58	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal

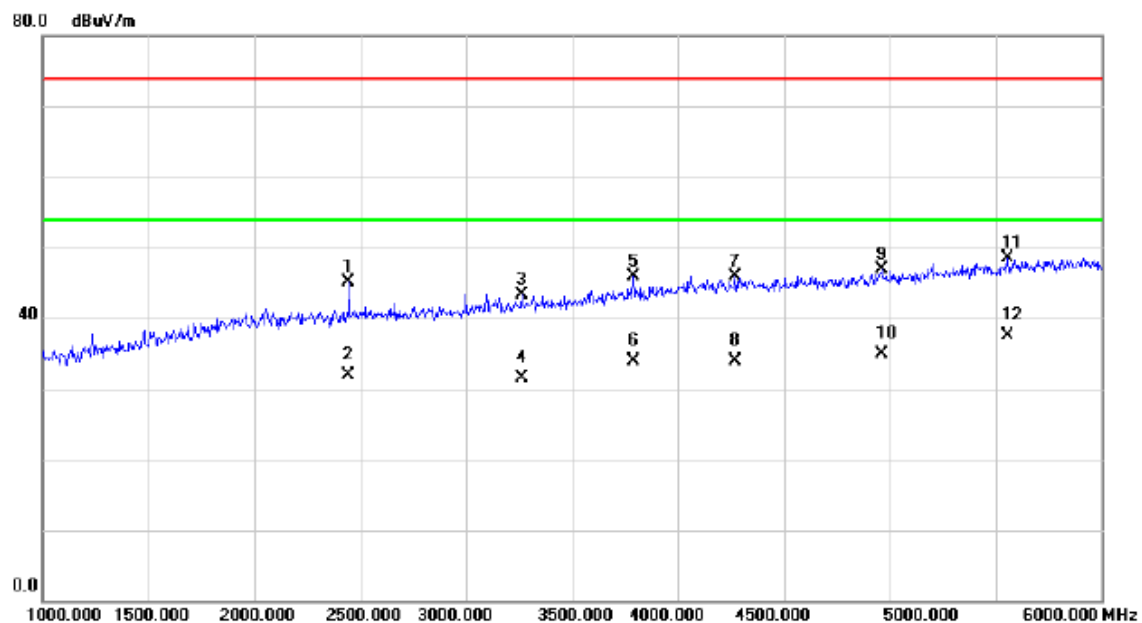

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2445.000	45.12	0.06	45.18	74.00	-28.82	peak	
2		2445.000	31.85	0.06	31.91	54.00	-22.09	AVG	
3		3260.000	41.04	2.28	43.32	74.00	-30.68	peak	
4		3260.000	29.17	2.28	31.45	54.00	-22.55	AVG	
5		3790.000	41.57	4.24	45.81	74.00	-28.19	peak	
6		3790.000	29.68	4.24	33.92	54.00	-20.08	AVG	
7		4270.000	40.36	5.48	45.84	74.00	-28.16	peak	
8		4270.000	28.51	5.48	33.99	54.00	-20.01	AVG	
9		4960.000	39.71	7.22	46.93	74.00	-27.07	peak	
10		4960.000	27.70	7.22	34.92	54.00	-19.08	AVG	
11		5555.000	39.15	9.41	48.56	74.00	-25.44	peak	
12	*	5555.000	28.07	9.41	37.48	54.00	-16.52	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

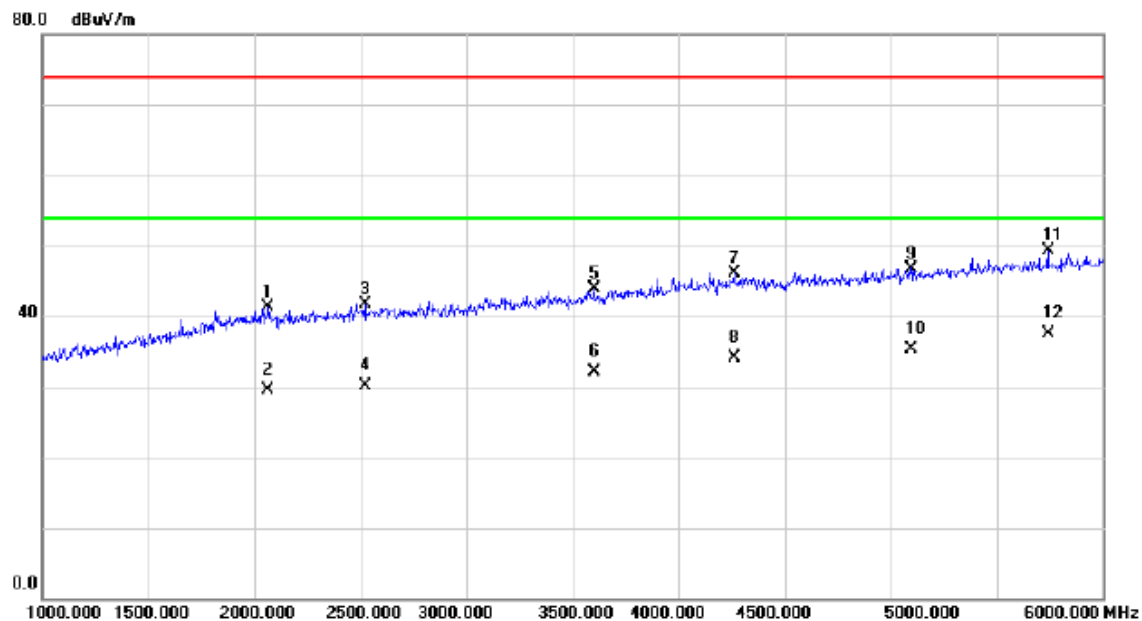

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2065.000	41.73	-0.51	41.22	74.00	-32.78	peak	
2		2065.000	30.04	-0.51	29.53	54.00	-24.47	AVG	
3		2520.000	41.60	0.18	41.78	74.00	-32.22	peak	
4		2520.000	29.91	0.18	30.09	54.00	-23.91	AVG	
5		3600.000	40.42	3.50	43.92	74.00	-30.08	peak	
6		3600.000	28.51	3.50	32.01	54.00	-21.99	AVG	
7		4260.000	40.57	5.47	46.04	74.00	-27.96	peak	
8		4260.000	28.71	5.47	34.18	54.00	-19.82	AVG	
9		5095.000	39.08	7.72	46.80	74.00	-27.20	peak	
10		5095.000	27.60	7.72	35.32	54.00	-18.68	AVG	
11		5740.000	39.35	9.92	49.27	74.00	-24.73	peak	
12	*	5740.000	27.50	9.92	37.42	54.00	-16.58	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal

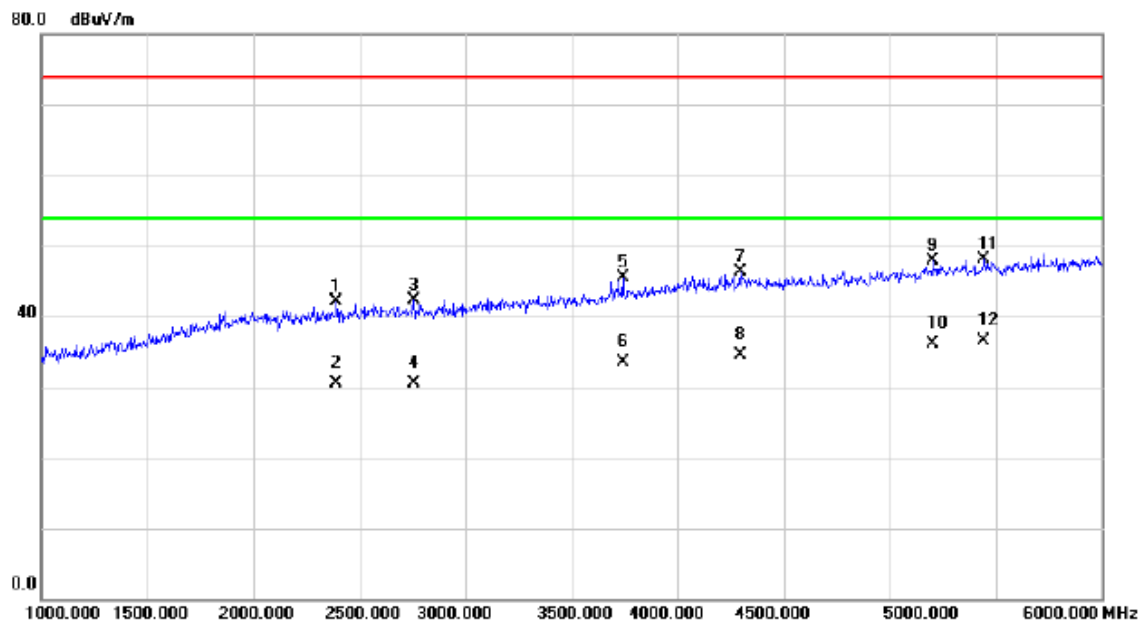

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.18	-0.03	42.15	74.00	-31.85	peak	
2		2390.000	30.51	-0.03	30.48	54.00	-23.52	AVG	
3		2755.000	41.60	0.78	42.38	74.00	-31.62	peak	
4		2755.000	29.75	0.78	30.53	54.00	-23.47	AVG	
5		3740.000	41.37	4.04	45.41	74.00	-28.59	peak	
6		3740.000	29.49	4.04	33.53	54.00	-20.47	AVG	
7		4295.000	40.82	5.53	46.35	74.00	-27.65	peak	
8		4295.000	29.00	5.53	34.53	54.00	-19.47	AVG	
9		5205.000	39.80	8.13	47.93	74.00	-26.07	peak	
10		5205.000	28.01	8.13	36.14	54.00	-17.86	AVG	
11		5445.000	39.05	9.06	48.11	74.00	-25.89	peak	
12	*	5445.000	27.44	9.06	36.50	54.00	-17.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

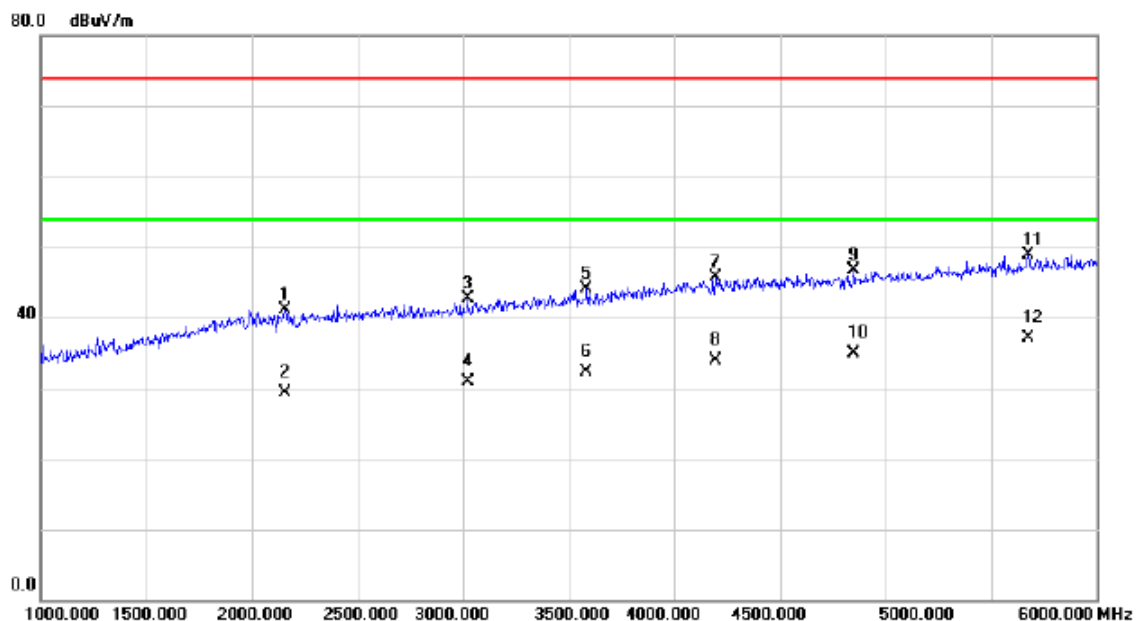

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2155.000	41.56	-0.39	41.17	74.00	-32.83	peak	
2		2155.000	29.79	-0.39	29.40	54.00	-24.60	AVG	
3		3020.000	41.26	1.46	42.72	74.00	-31.28	peak	
4		3020.000	29.36	1.46	30.82	54.00	-23.18	AVG	
5		3585.000	40.68	3.44	44.12	74.00	-29.88	peak	
6		3585.000	28.89	3.44	32.33	54.00	-21.67	AVG	
7		4195.000	40.42	5.37	45.79	74.00	-28.21	peak	
8		4195.000	28.58	5.37	33.95	54.00	-20.05	AVG	
9		4850.000	39.81	6.90	46.71	74.00	-27.29	peak	
10		4850.000	27.97	6.90	34.87	54.00	-19.13	AVG	
11		5675.000	39.12	9.75	48.87	74.00	-25.13	peak	
12	*	5675.000	27.42	9.75	37.17	54.00	-16.83	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal

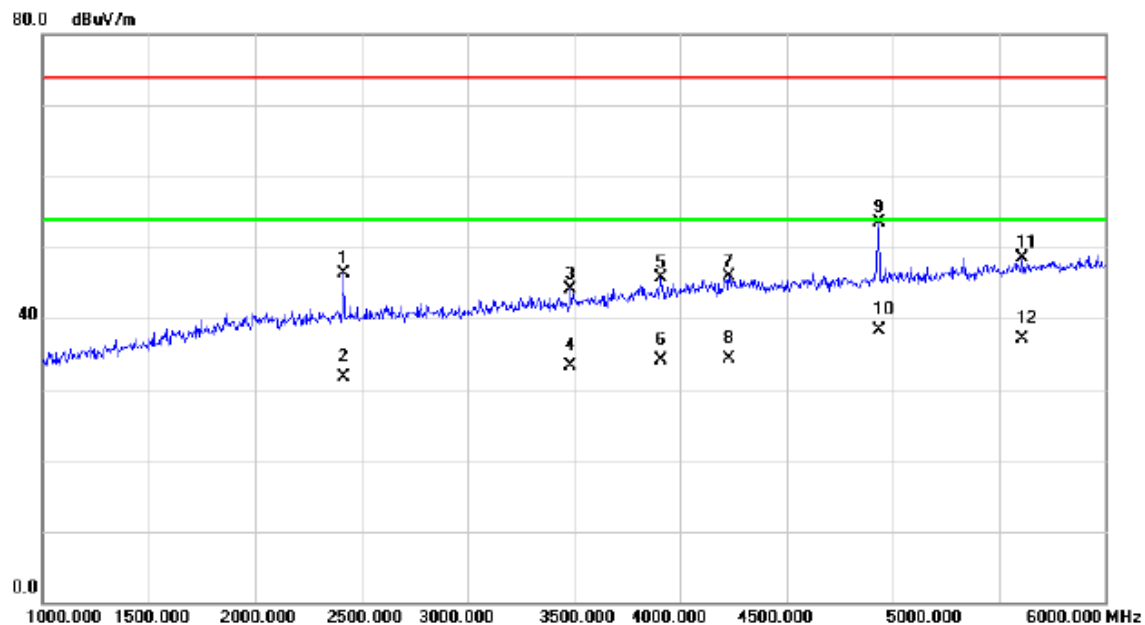

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2415.000	46.24	0.00	46.24	74.00	-27.76	peak	
2		2415.000	31.73	0.00	31.73	54.00	-22.27	AVG	
3		3485.000	40.96	3.05	44.01	74.00	-29.99	peak	
4		3485.000	30.19	3.05	33.24	54.00	-20.76	AVG	
5		3910.000	41.03	4.71	45.74	74.00	-28.26	peak	
6		3910.000	29.30	4.71	34.01	54.00	-19.99	AVG	
7		4230.000	40.53	5.42	45.95	74.00	-28.05	peak	
8		4230.000	28.84	5.42	34.26	54.00	-19.74	AVG	
9		4935.000	46.26	7.15	53.41	74.00	-20.59	peak	
10	*	4935.000	31.13	7.15	38.28	54.00	-15.72	AVG	
11		5610.000	39.01	9.57	48.58	74.00	-25.42	peak	
12		5610.000	27.46	9.57	37.03	54.00	-16.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

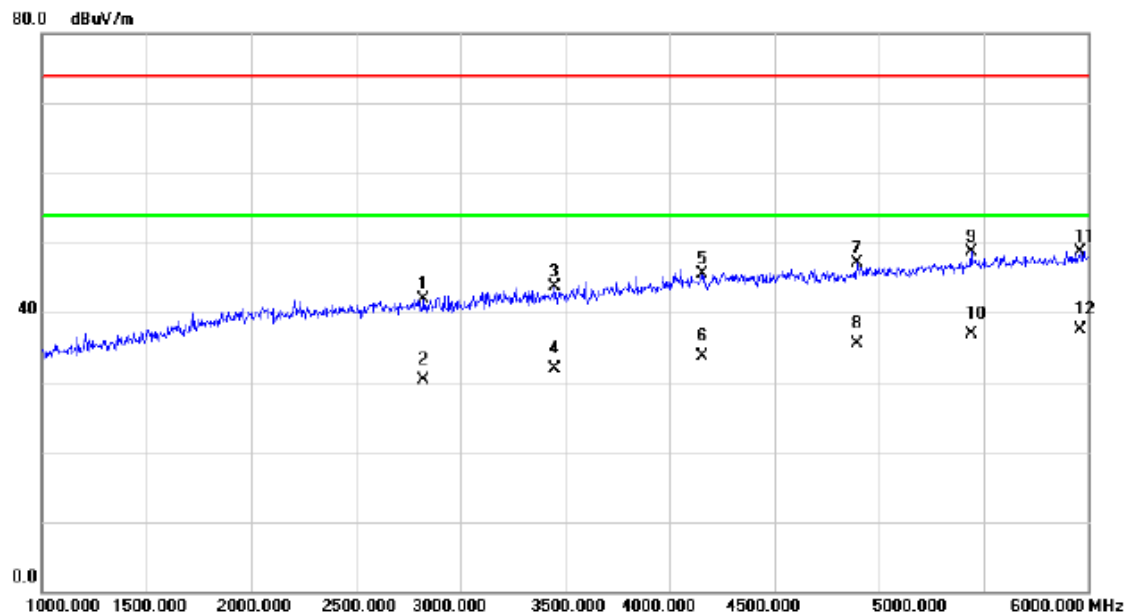

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2825.000	40.95	0.95	41.90	74.00	-32.10	peak	
2		2825.000	29.31	0.95	30.26	54.00	-23.74	AVG	
3		3450.000	40.79	2.93	43.72	74.00	-30.28	peak	
4		3450.000	29.01	2.93	31.94	54.00	-22.06	AVG	
5		4155.000	40.26	5.30	45.56	74.00	-28.44	peak	
6		4155.000	28.46	5.30	33.76	54.00	-20.24	AVG	
7		4895.000	40.14	7.04	47.18	74.00	-26.82	peak	
8		4895.000	28.48	7.04	35.52	54.00	-18.48	AVG	
9		5440.000	39.72	9.04	48.76	74.00	-25.24	peak	
10		5440.000	27.85	9.04	36.89	54.00	-17.11	AVG	
11		5960.000	38.19	10.54	48.73	74.00	-25.27	peak	
12	*	5960.000	26.92	10.54	37.46	54.00	-16.54	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD


Horizontal

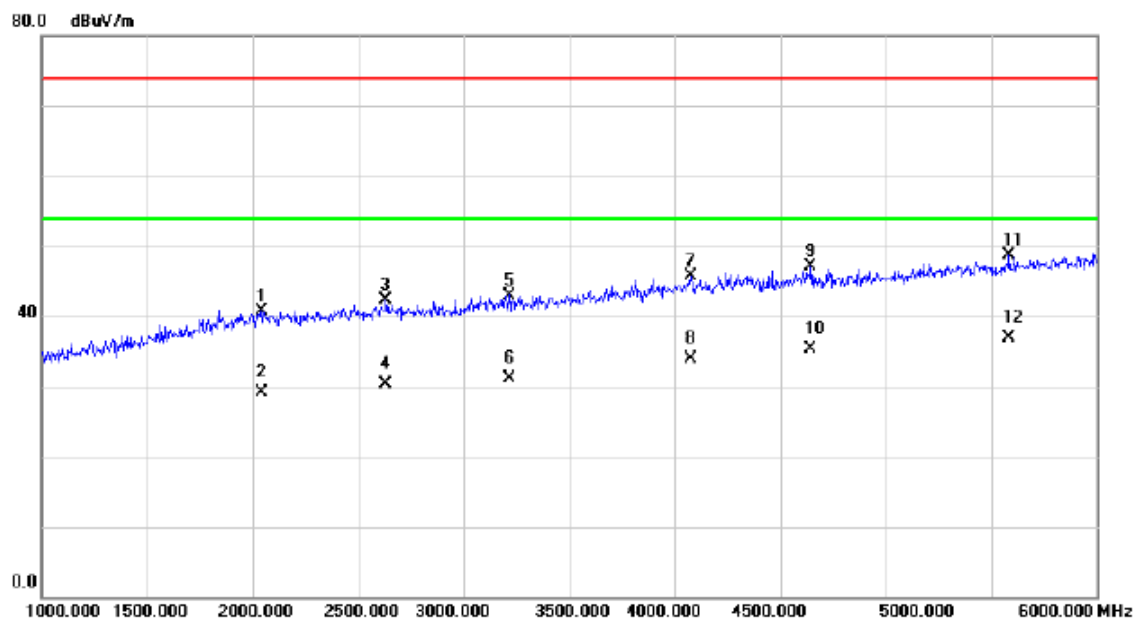

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2045.000	41.26	-0.54	40.72	74.00	-33.28	peak	
2		2045.000	29.55	-0.54	29.01	54.00	-24.99	AVG	
3		2630.000	41.80	0.47	42.27	74.00	-31.73	peak	
4		2630.000	29.89	0.47	30.36	54.00	-23.64	AVG	
5		3215.000	40.87	2.13	43.00	74.00	-31.00	peak	
6		3215.000	29.05	2.13	31.18	54.00	-22.82	AVG	
7		4075.000	40.46	5.18	45.64	74.00	-28.36	peak	
8		4075.000	28.64	5.18	33.82	54.00	-20.18	AVG	
9		4645.000	40.89	6.28	47.17	74.00	-26.83	peak	
10		4645.000	28.93	6.28	35.21	54.00	-18.79	AVG	
11		5585.000	39.13	9.50	48.63	74.00	-25.37	peak	
12	*	5585.000	27.32	9.50	36.82	54.00	-17.18	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD


Vertical

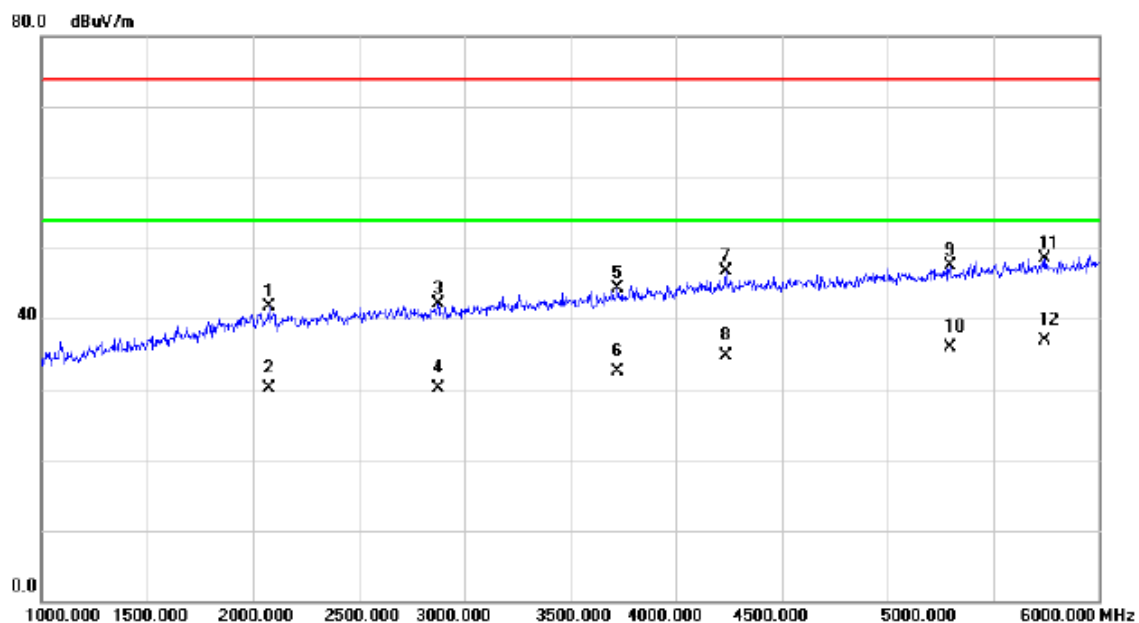

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2075.000	42.19	-0.50	41.69	74.00	-32.31	peak	
2		2075.000	30.56	-0.50	30.06	54.00	-23.94	AVG	
3		2875.000	40.98	1.08	42.06	74.00	-31.94	peak	
4		2875.000	29.06	1.08	30.14	54.00	-23.86	AVG	
5		3725.000	40.30	3.99	44.29	74.00	-29.71	peak	
6		3725.000	28.51	3.99	32.50	54.00	-21.50	AVG	
7		4235.000	41.19	5.42	46.61	74.00	-27.39	peak	
8		4235.000	29.35	5.42	34.77	54.00	-19.23	AVG	
9		5295.000	39.06	8.49	47.55	74.00	-26.45	peak	
10		5295.000	27.46	8.49	35.95	54.00	-18.05	AVG	
11		5745.000	38.57	9.93	48.50	74.00	-25.50	peak	
12	*	5745.000	26.98	9.93	36.91	54.00	-17.09	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal

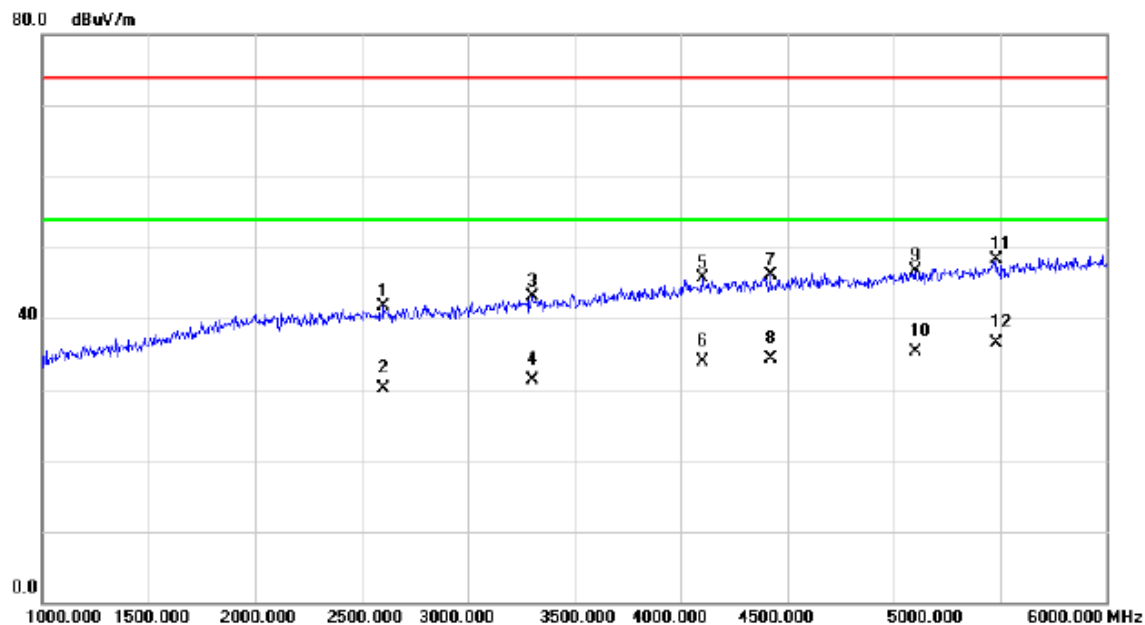

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2605.000	41.40	0.40	41.80	74.00	-32.20	peak	
2		2605.000	29.74	0.40	30.14	54.00	-23.86	AVG	
3		3300.000	40.72	2.42	43.14	74.00	-30.86	peak	
4		3300.000	28.83	2.42	31.25	54.00	-22.75	AVG	
5		4100.000	40.48	5.21	45.69	74.00	-28.31	peak	
6		4100.000	28.66	5.21	33.87	54.00	-20.13	AVG	
7		4420.000	40.41	5.72	46.13	74.00	-27.87	peak	
8		4420.000	28.53	5.72	34.25	54.00	-19.75	AVG	
9		5100.000	39.03	7.73	46.76	74.00	-27.24	peak	
10		5100.000	27.59	7.73	35.32	54.00	-18.68	AVG	
11		5485.000	39.01	9.21	48.22	74.00	-25.78	peak	
12	*	5485.000	27.24	9.21	36.45	54.00	-17.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD


Vertical

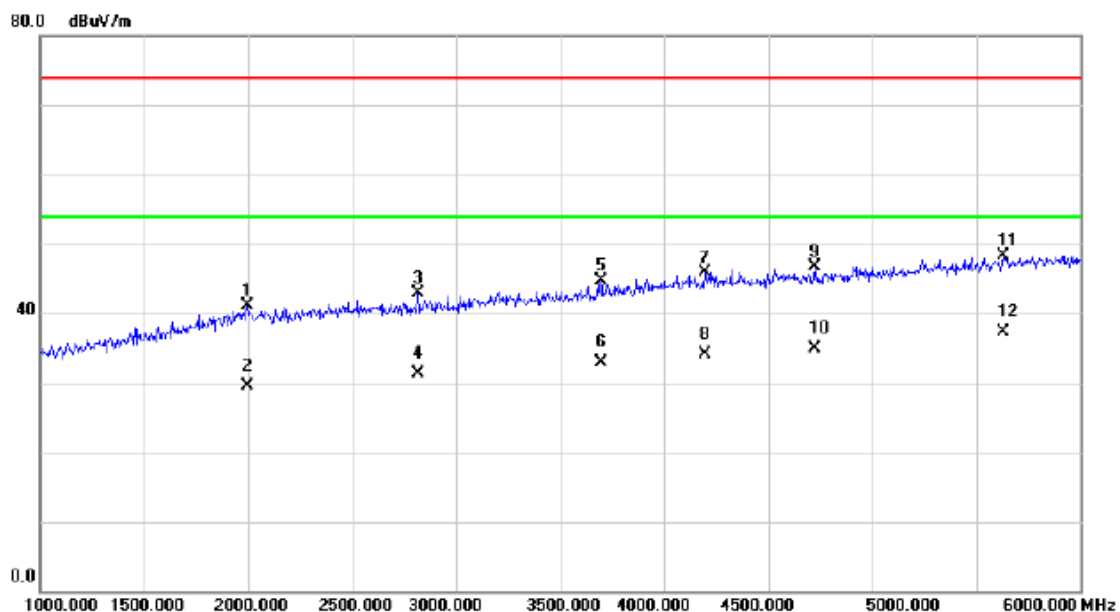

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1995.000	41.84	-0.65	41.19	74.00	-32.81	peak	
2		1995.000	30.07	-0.65	29.42	54.00	-24.58	AVG	
3		2815.000	41.89	0.92	42.81	74.00	-31.19	peak	
4		2815.000	30.32	0.92	31.24	54.00	-22.76	AVG	
5		3695.000	40.75	3.88	44.63	74.00	-29.37	peak	
6		3695.000	28.96	3.88	32.84	54.00	-21.16	AVG	
7		4195.000	40.56	5.37	45.93	74.00	-28.07	peak	
8		4195.000	28.83	5.37	34.20	54.00	-19.80	AVG	
9		4720.000	40.21	6.51	46.72	74.00	-27.28	peak	
10		4720.000	28.46	6.51	34.97	54.00	-19.03	AVG	
11		5630.000	38.63	9.62	48.25	74.00	-25.75	peak	
12	*	5630.000	27.78	9.62	37.40	54.00	-16.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD


Horizontal

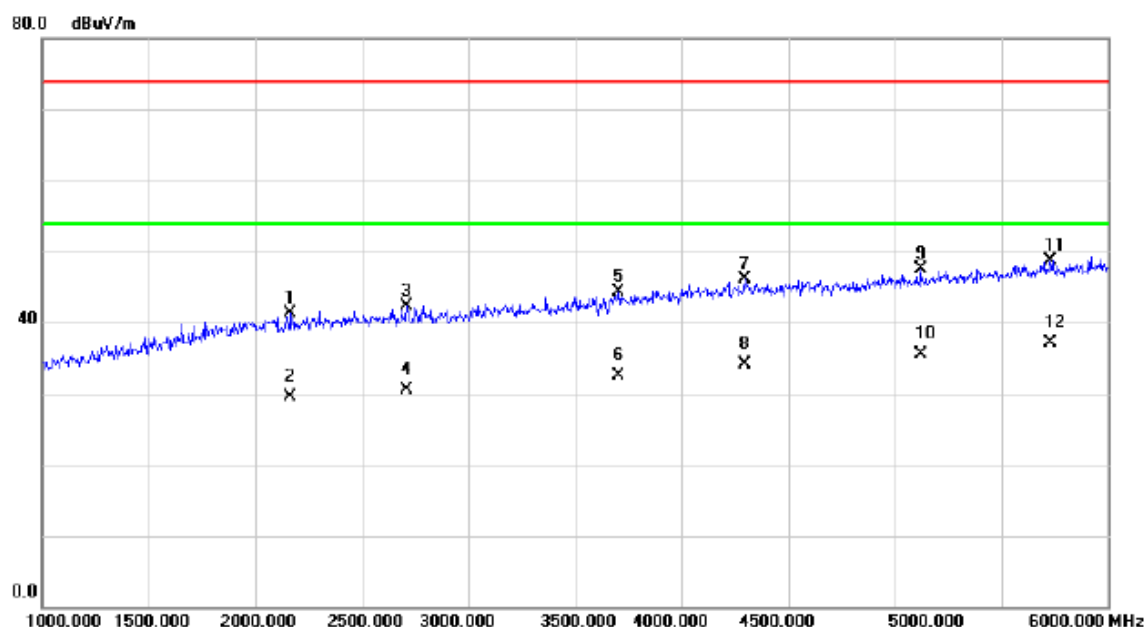

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2165.000	41.59	-0.37	41.22	74.00	-32.78	peak	
2		2165.000	29.86	-0.37	29.49	54.00	-24.51	AVG	
3		2710.000	41.70	0.67	42.37	74.00	-31.63	peak	
4		2710.000	29.90	0.67	30.57	54.00	-23.43	AVG	
5		3705.000	40.37	3.91	44.28	74.00	-29.72	peak	
6		3705.000	28.62	3.91	32.53	54.00	-21.47	AVG	
7		4295.000	40.48	5.53	46.01	74.00	-27.99	peak	
8		4295.000	28.65	5.53	34.18	54.00	-19.82	AVG	
9		5120.000	39.61	7.81	47.42	74.00	-26.58	peak	
10		5120.000	27.77	7.81	35.58	54.00	-18.42	AVG	
11		5730.000	38.82	9.90	48.72	74.00	-25.28	peak	
12	*	5730.000	27.21	9.90	37.11	54.00	-16.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD


Vertical

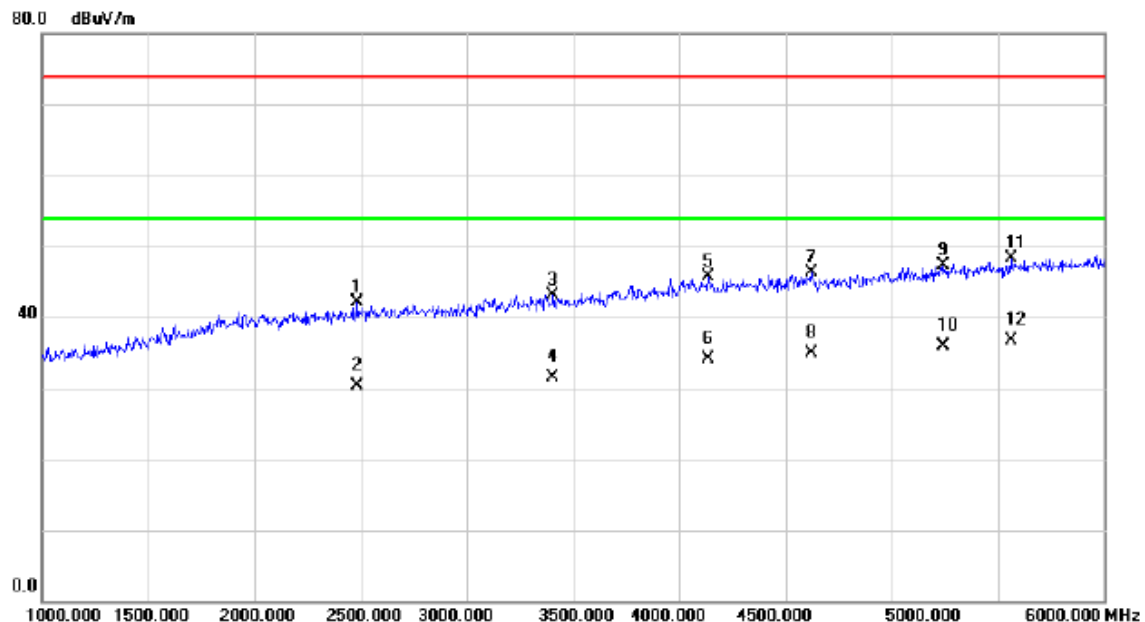

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2485.000	41.97	0.12	42.09	74.00	-31.91	peak	
2		2485.000	30.13	0.12	30.25	54.00	-23.75	AVG	
3		3405.000	40.42	2.77	43.19	74.00	-30.81	peak	
4		3405.000	28.68	2.77	31.45	54.00	-22.55	AVG	
5		4135.000	40.40	5.27	45.67	74.00	-28.33	peak	
6		4135.000	28.76	5.27	34.03	54.00	-19.97	AVG	
7		4620.000	40.18	6.21	46.39	74.00	-27.61	peak	
8		4620.000	28.61	6.21	34.82	54.00	-19.18	AVG	
9		5245.000	38.92	8.29	47.21	74.00	-26.79	peak	
10		5245.000	27.56	8.29	35.85	54.00	-18.15	AVG	
11		5560.000	38.79	9.44	48.23	74.00	-25.77	peak	
12	*	5560.000	27.17	9.44	36.61	54.00	-17.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: Phitek + USB Cable: Luxshare +Battery: SCUD


Horizontal

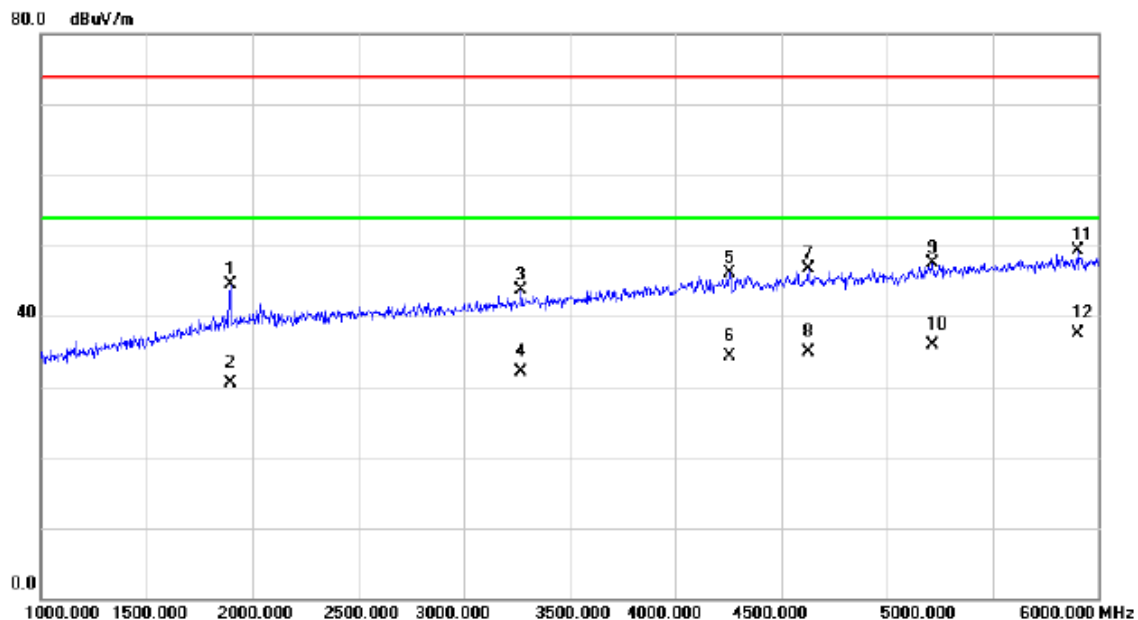

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1895.000	45.95	-1.42	44.53	74.00	-29.47	peak	
2		1895.000	31.90	-1.42	30.48	54.00	-23.52	AVG	
3		3270.000	41.42	2.32	43.74	74.00	-30.26	peak	
4		3270.000	29.70	2.32	32.02	54.00	-21.98	AVG	
5		4255.000	40.60	5.46	46.06	74.00	-27.94	peak	
6		4255.000	28.90	5.46	34.36	54.00	-19.64	AVG	
7		4630.000	40.46	6.24	46.70	74.00	-27.30	peak	
8		4630.000	28.70	6.24	34.94	54.00	-19.06	AVG	
9		5215.000	39.35	8.17	47.52	74.00	-26.48	peak	
10		5215.000	27.65	8.17	35.82	54.00	-18.18	AVG	
11		5905.000	38.95	10.38	49.33	74.00	-24.67	peak	
12	*	5905.000	27.09	10.38	37.47	54.00	-16.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

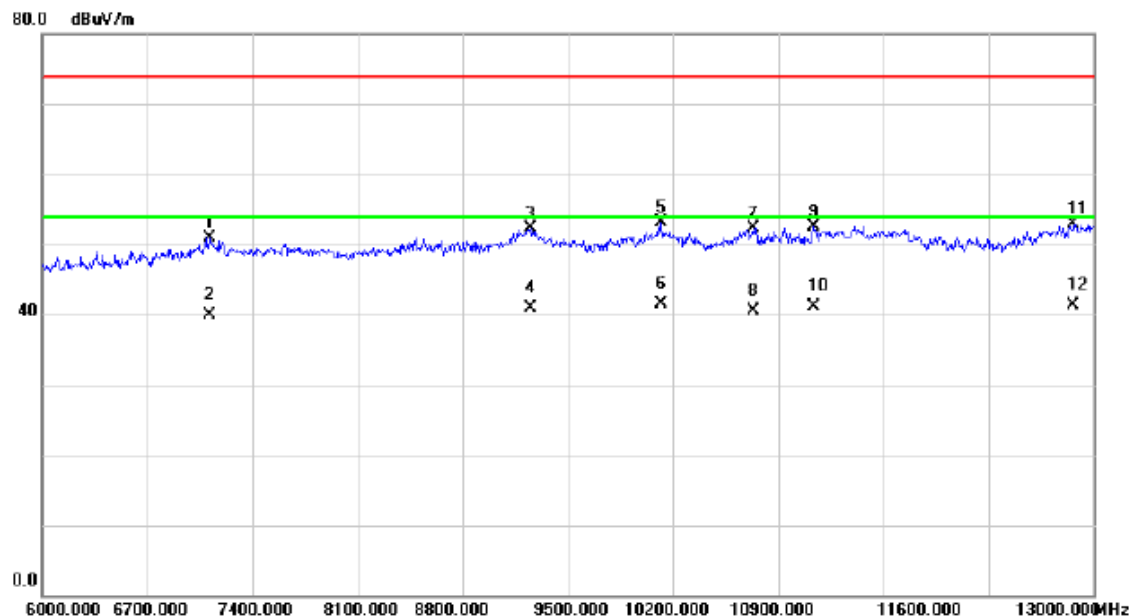

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7113.000	39.04	11.86	50.90	74.00	-23.10	peak	
2		7113.000	28.11	11.86	39.97	54.00	-14.03	AVG	
3		9248.000	37.39	14.82	52.21	74.00	-21.79	peak	
4		9248.000	25.99	14.82	40.81	54.00	-13.19	AVG	
5		10116.00	36.63	16.41	53.04	74.00	-20.96	peak	
6	*	10116.00	25.08	16.41	41.49	54.00	-12.51	AVG	
7		10732.00	34.80	17.52	52.32	74.00	-21.68	peak	
8		10732.00	23.01	17.52	40.53	54.00	-13.47	AVG	
9		11138.00	33.74	18.71	52.45	74.00	-21.55	peak	
10		11138.00	22.43	18.71	41.14	54.00	-12.86	AVG	
11		12867.00	32.49	20.36	52.85	74.00	-21.15	peak	
12		12867.00	20.89	20.36	41.25	54.00	-12.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG

Horizontal

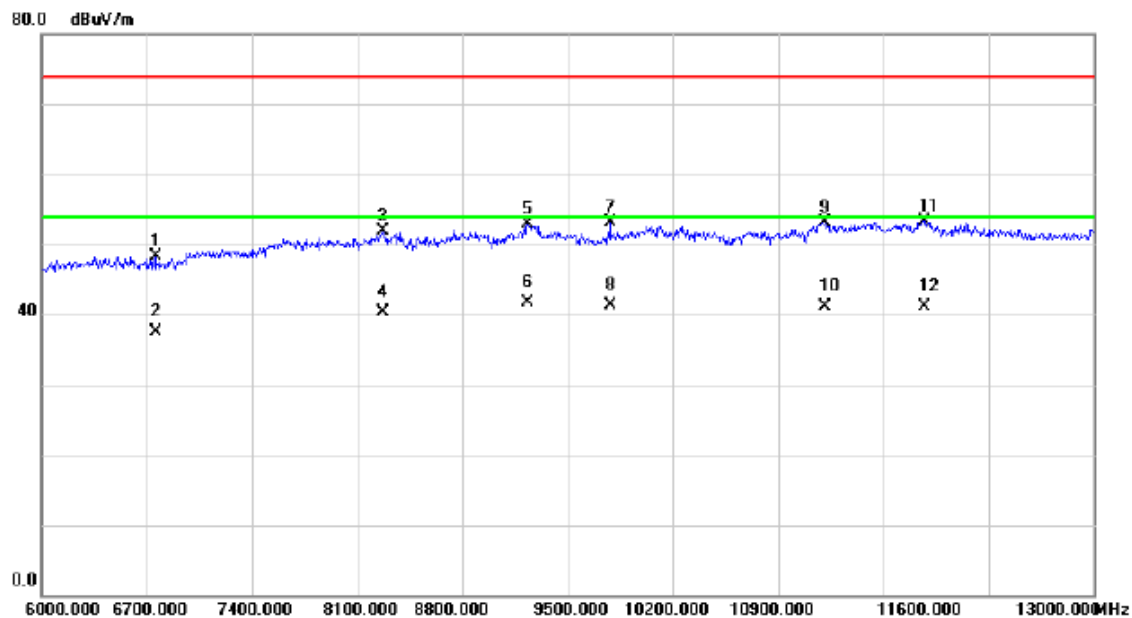

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6756.000	36.92	11.45	48.37	74.00	-25.63	peak	
2		6756.000	26.08	11.45	37.53	54.00	-16.47	AVG	
3		8268.000	38.19	13.66	51.85	74.00	-22.15	peak	
4		8268.000	26.73	13.66	40.39	54.00	-13.61	AVG	
5		9234.000	38.19	14.80	52.99	74.00	-21.01	peak	
6	*	9234.000	26.84	14.80	41.64	54.00	-12.36	AVG	
7		9780.000	37.30	15.77	53.07	74.00	-20.93	peak	
8		9780.000	25.56	15.77	41.33	54.00	-12.67	AVG	
9		11215.000	34.39	18.78	53.17	74.00	-20.83	peak	
10		11215.000	22.31	18.78	41.09	54.00	-12.91	AVG	
11		11873.000	33.60	19.61	53.21	74.00	-20.79	peak	
12		11873.000	21.54	19.61	41.15	54.00	-12.85	AVG	