FCC SAR Compliance Test Report

Product Name: Mobile WiFi

Model: HWD35

Report No.: SYBH(Z-SAR)019102016-2

FCC ID: QISHWD35

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	Wei Huanbin	Li Wei
DATE	2016-12-06	2016-12-06

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Tel: +86 755 28780808 Fax: +86 755 89652518

※ ※ Notice ※ ※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.

2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03

3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.

4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.

5. The test report is invalid if there is any evidence of erasure and/or falsification.

6. The test report is only valid for the test samples.

7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

Copyright © Huawei Technologies Co., Ltd

Table of Contents

1 General Information 6
1.1 Statement of Compliance 6
1.2 RF exposure limits 7
1.3 EUT Description 8
1.3.1 General Description 9
1.3.2 Power reduction specification 9
1.4 Test specification(s) 10
1.5 Testing laboratory 10
1.6 Applicant and Manufacturer 10
1.7 Application details 10
1.8 Ambient Condition 10
2 SAR Measurement System 11
2.1 SAR Measurement Set-up 11
2.2 Test environment 12
2.3 Data Acquisition Electronics description 12
2.4 Probe description 13
2.5 Phantom description 14
2.6 Device holder description 15
2.7 Test Equipment List 16
3 SAR Measurement Procedure 17
3.1 Scanning procedure 17
3.2 Spatial Peak SAR Evaluation 18
3.3 Data Storage and Evaluation 19
4 System Verification Procedure 21
4.1 Tissue Verification 21
4.2 System Check 22
4.3 System check Procedure 23
5 SAR measurement variability and uncertainty 24
5.1 SAR measurement variability 24
5.2 SAR measurement uncertainty 24
6 SAR Test Configuration 25
6.1 Test Positions Configuration 25
6.2 Proximity sensor Test Configuration 26
6.3 3G SAR Test Reduction Procedure 29
6.4 UMTS Test Configuration 29
6.5 LTE Test Configuration 35
6.6 WiFi Test Configuration 37
6.6.1 Initial Test Position Procedure 37
6.6.2 Initial Test Configuration Procedure 37
6.6.3 Sub Test Configuration Procedure 37
6.6.4 WiFi 2.4G SAR Test Procedures 38
6.6.5 MIMO SAR Considerations 38
7 SAR Measurement Results 39
7.1 Conducted power measurements 39
7.1.1 Conducted power measurements of UMTS Band V 39
7.1.2 Conducted power measurements of UMTS Band II 40
7.1.3 Conducted power measurements of LTE Band V 42
7.1.4 Conducted power measurements of LTE Band XVII 44
7.1.5 Conducted power measurements of WiFi 2.4G 46
7.1.6 Conducted power measurements of BT 47
7.2 SAR measurement Results 48
7.2.1 SAR measurement Result of UMTS Band II 50
7.2.2 SAR measurement Result of UMTS Band V 51
7.2.3 SAR measurement Result of LTE Band V 52
7.2.4 SAR measurement Result of LTE Band XVII 54
7.2.5 SAR measurement Result of WiFi 2.4G 55
7.3 Multiple Transmitter Evaluation 57

Copyright © Huawei Technologies Co., Ltd

7.3.1 Stand-alone SAR test exclusion 58
7.3.2 Simultaneous Transmission Possibilities 59
7.3.3 SAR Summation Scenario 59
7.3.4 Simultaneous Transmission Conlcusion 60
Appendix A. System Check Plots 61
Appendix B. SAR Measurement Plots 61
Appendix C. Calibration Certificate 61
Appendix D. Photo documentation 61

Copyright © Huawei Technologies Co., Ltd

※ ※ Modified History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2016-12-06	Li Wei

Copyright © Huawei Technologies Co., Ltd

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for HWD35 is as below Table 1.

Band	Position	Max Reported 1-g SAR SAR(W/kg)
UMTS Band II	Top Side 10mm	0.99
UMTS Band V	Back side 10mm	1.08
LTE Band V	Back side 10mm	**1.35**
LTE Band XVII	Back side 10mm	0.56
WiFi 2.4G	Front side 10mm	0.30
The highest reported SAR for body and simultaneous transmission exposure conditions are 1.35W/kg and 1.56 W/kg respectively per KDB690783 D01.		

Table 1:Summary of test result

Note:

The device is in compliance with Specific Absorption Rate(SAR)for general population/uncontraolled exposure limits according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013

Copyright © Huawei Technologies Co., Ltd

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	**1.60 W/kg**	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.

Copyright © Huawei Technologies Co., Ltd

1.3 EUT Description

Device Information:			
Product Name:	Mobile WiFi		
Model:	HWD35		
FCC ID :	QISHWD35		
IMEI:	1#:863123030000653 2#:863123030011858		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	CL1KD10UM		
Software Version :	11.450.01.09.824		
Antenna Type :	Internal antenna		
Device Operating Configurations:			
Supporting Mode(s)	UMTS Band II/V, LTE Band V/XVII, WiFi 2.4G(Tested); BT		
Test Modulation	UMTS(QPSK),LTE(QPSK/16QAM/64QAM),WiFi(DSSS/OFDM), BT(GFSK)		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	UMTS Band II	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	LTE Band V	824-849	869-894
	LTE Band XVII	704-716	734-746
	WiFi 2.4G	2400-2472	
	BT	2400-2483.5	
	NFC	/	13.56
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
LTE UE category	5		
Power Class:	3, tested with power control “all 1”(UMTS Band II)		
	3, tested with power control “all 1”(UMTS Band V)		
	3, tested with power control all Max.(LTE Band V)		
	3, tested with power control all Max.(LTE Band XVII)		
Test Channels (low-mid-high):	9262-9400-9538(UMTS Band II)		
	4132-4182-4233(UMTS Band V)		
	20425-20525-20625(LTE Band V BW=5MHz)		
	20450-20525-20600(LTE Band V BW=10MHz)		
	23755-23790-23825(LTE Band XVII BW=5MHz)		
	23780-23790-23800(LTE Band XVII BW=10MHz)		
	802.11b/g/n 20M: 1-6-11 (WiFi 2.4G) 802.11n 40M: 3-6-9 (WiFi 2.4G)		

Table 3:Device information and operating configuration

Copyright © Huawei Technologies Co., Ltd

1.3.1 General Description

HWD35 is a LTE/UMTS mode and 2*2 WiFi Wireless mobile WiFi. It can be used as a WiFi hotspot based on standard of IEEE802.11b/g/n. It supports 3G WCDMA and 4G LTE wireless internet accessing function. About 3G WCDMA wireless mode, it supports WCDMA and HSDPA/HSUPA/HSPA+/DC-HSDPA, operating in Band2 and Band 5. And the 4G LTE, operating in Band5 and Band17.
The WiFi is 2X2 and the frequency is 2.4GHz. HWD35 support Bluetooth, BR/EDR 2.1 and BLE4.1.
HWD35 supports 1Tx2Rx for 3G WCDMA and 4G LTE.

Battery information:

Name	Manufacture	Serials number	Description
Rechargeable Li-ion	Desay	NA	Battery Model: HB603689EBW Rated capacity: 2750mAh Nominal Voltage: ⎓ +3.8V Charging Voltage: ⎓ +4.25V
	SCUD	NA	

1.3.2 Power reduction specification

This device uses a proximity sensor that share the same metallic electrode as the transmitting antenna to facilitate triggering in typical user interactivity with the device.
Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the tablet is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance.
The following tables summerize the key power reduction information for proximity sensor. The similar test procedures in KDB 616217 should be applied to determine proximity sensor triggering distances, and sensor coverage for normal and tilt positions. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

Band	Sensor Trigger Distance	Full Power Level (dBm)	Reduced power Level (dBm)	Power reduction (dB)
UMTS B2	Front side: 17mm Top side: 17mm	23.5	21.0	2.5

Note:
1) Since the capacitive proximity sensor triggering distance for the front side and top side is 17mm , a conservative distance of 16mm was tested for SAR at maximum power level per KDB616217§6.2.
The detailed full power and reduced tune-up specifications and conducted power measurement results are provided in Section 7 of this report.
2) The capacitive proximity sensor does not trigger power reduction for the other edges or frequency bands of the device.

Copyright © Huawei Technologies Co., Ltd

1.4 Test specification(s)

ANSI C95.1:1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB941225 D01	3G SAR Procedures v03r01
KDB941225 D05	SAR for LTE Devices v02r05
KDB941225 D06	Hotspot SAR v02r01
KDB447498 D01	General RF Exposure Guidance v06
KDB248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	SAR Reporting v01r02
KDB 616217 D04	SAR for laptop and tablets v01r02
KDB690783 D01	SAR Listings on Grants v01r03

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Section G1,Huawei Base Bantian, Longgang District, Shenzhen 518129, P.R. China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01 & 2174.02 & 2174.03

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details

Start Date of test	2016-10-31
End Date of test	2016-11-29

1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

Copyright © Huawei Technologies Co., Ltd

2 SAR Measurement System

2.1 SAR Measurement Set-up

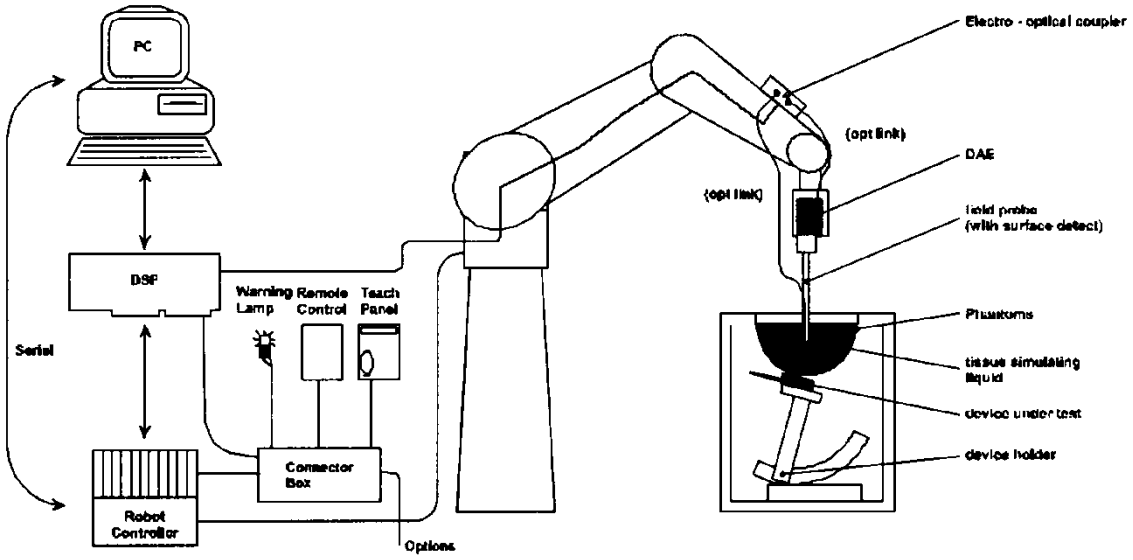

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

Copyright © Huawei Technologies Co., Ltd

2.2 Test environment

The DASY5 measurement system is placed at the head end of a room with dimensions:
5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.
Picture 1 of the photo documentation shows a complete view of the test environment.
The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

Copyright © Huawei Technologies Co., Ltd

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (±2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	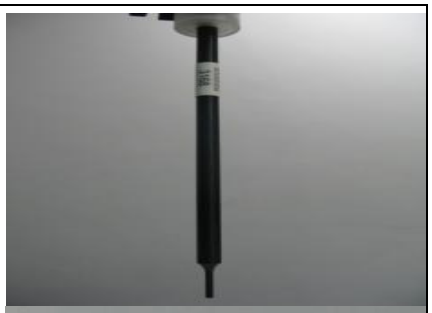
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 µW/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 µW/g to > 100 mW/g; Linearity: ± 0.2 dB(noise:typically<1µW/g)	
Dimensions	Overall length: 337 mm (Tip:20 mm) Tip diameter:2.5 mm (Body:12 mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario(e.g.,very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	

Copyright © Huawei Technologies Co., Ltd

2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	
The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.		

The following figure shows the definition of reference point:

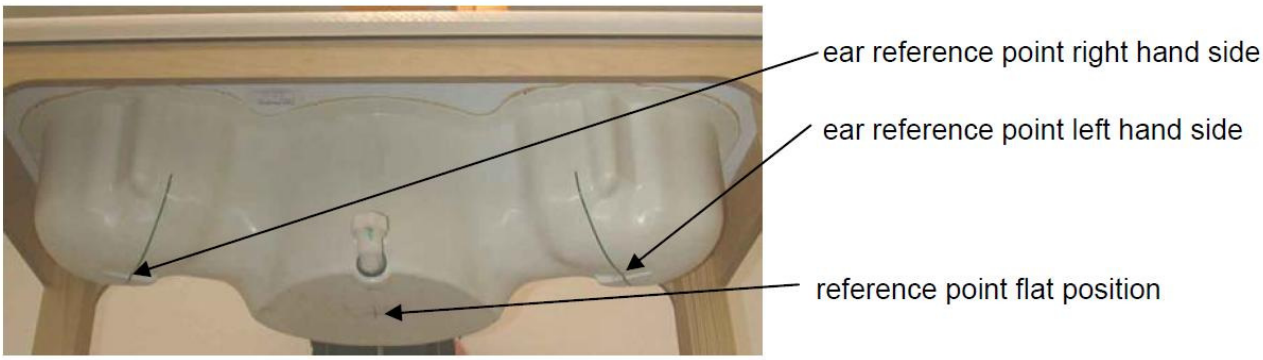

ELI4 Phantom

Shell Thickness	2mm±0.2mm	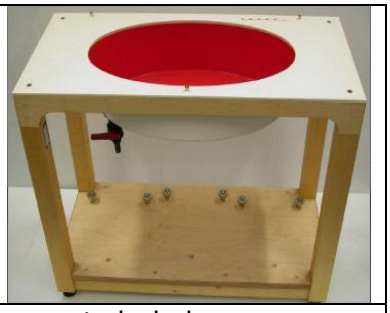
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	
The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.		

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity 2≤εr≤5 at ≤3 GHz,3≤ εr≤4 at >3 GHz and and a loss tangent ⩽0.05.

Copyright © Huawei Technologies Co., Ltd

2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity ε =3 and loss tangent σ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.
The device holder permits the device to be positioned with a tolerance of ±1° in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.
Therefore those devices are normally only tested at the flat part of the SAM.

Copyright © Huawei Technologies Co., Ltd

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.
Devices used during the test described are marked ☒

	Manufacturer	Device	Type	Serial number	Date of last calibration*	Valid period
☒	SPEAG	Dosimetric E-Field Probe	EX3DV4	7381	2016-09-29	One year
☒	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2016-04-26	One year
☒	SPEAG	Dosimetric E-Field Probe	EX3DV4	7346	2016-06-23	One year
☒	SPEAG	750MHz Dipole	D750V3	1044	2016-09-28	Three years
☒	SPEAG	835MHz Dipole	D835V2	4d059	2016-04-20	Three years
☒	SPEAG	1900MHz Dipole	D1900V2	5d143	2014-09-23	Three years
☒	SPEAG	2450MHz Dipole	D2450V2	978	2016-02-08	Three years
☐	SPEAG	2600MHz Dipole	D2600V2	1021	2015-07-24	Three years
☐	SPEAG	5GHz Dipole	D5GHzV2	1155	2015-04-27	Three years
☒	SPEAG	Data acquisition electronics	DAE4	914	2016-01-07	One year
☒	SPEAG	Data acquisition electronics	DAE4	1492	2016-09-28	One year
☒	SPEAG	Software	DASY 5	N/A	NCR	NCR
☒	SPEAG	Twin Phantom	SAM6	TP-1892	NCR	NCR
☐	SPEAG	Flat Phantom	ELI 4.0	TP-1038	NCR	NCR
☐	SPEAG	Flat Phantom	ELI 4.0	TP-1111	NCR	NCR
☒	R & S	Universal Radio Communication Tester	CMU 200	111379	2015-12-23	One year
☒	R & S	Universal Radio Communication Tester	CMW 500	158850	2016-06-09	One year
☒	Agilent	Network Analyser	E5071C	MY46213349	2016-01-08	One year
☒	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
☒	Agilent	Signal Generator	E4438C	MY49071538	2016-03-01	One year
☒	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
☒	MINI-CIRCUITS	Amplifier	ZVE-8G+	N523101139	NCR	NCR
☒	AR	Directional Coupler	DC7144M1	31190	2016-05-13	One year
☒	Agilent	Dual Directional Coupler	772D	MY52180173	2016-01-06	One year
☒	R & S	Power Meter	NRP	100740	2016-07-20	One year
☒	R & S	Power Meter Sensor	NRP-Z11	106288	2016-07-07	One year
☒	Agilent	Power Meter	E4417A	MY54100027	2016-03-31	One year
☒	Agilent	Power Meter Sensor	E9321A	MY54130007	2016-03-31	One year
☒	Agilent	Power Meter Sensor	E9321A	MY54130001	2016-03-31	One year

Note:

1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

a) There is no physical damage on the dipole;
b) System check with specific dipole is within 10% of calibrated value;
c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3) *All the equipments are within the valid period when the tests are performed.

Copyright © Huawei Technologies Co., Ltd

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.

- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)

- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension(⩽2GHz)，12 mm in x- and y-dimension(2-4 GHz) and 10mm in x- and y- dimension(4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.
  Results of this coarse scan are shown in Appendix B.

- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: Δx_{zoom}, Δy_{zoom}⩽ 2GHz - ⩽8mm, 2-4GHz - ⩽5 mm and 4-6 GHz-⩽4mm; Δz_{zoom} ⩽3GHz - ⩽5 mm, 3-4 GHz- ⩽4mm and 4-6GHz-⩽2mm where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.)are shown in table form form in chapter 7.2.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

Copyright © Huawei Technologies Co., Ltd

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution (Δx_{area}, Δy_{area})	Maximun Zoom Scan spatial resolution (Δx_{Zoom}, Δy_{Zoom})	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)$*	$\Delta z_{Zoom}(n>1)$*	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5*$\Delta z_{Zoom}(n-1)$	≥22mm

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.

- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.

- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compansate boundary effects on E-field probes.

Copyright © Huawei Technologies Co., Ltd

3.3 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i$, a_{i0}, a_{i1}, a_{i2}
	- Conversion factor	$ConvF_i$
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \bullet cf/dcp_i$$

with	V_i	= compensated signal of channel i	(i = x, y, z)
	U_i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field	(DASY parameter)
	dcp_i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be

Copyright © Huawei Technologies Co., Ltd

evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i (i = x, y, z)
$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)^2] for E-field Probes
ConvF = sensitivity enhancement in solution
a_{ij} = sensor sensitivity factors for H-field probes
f = carrier frequency [GHz]
E_i = electric field strength of channel i in V/m
H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_Y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
E_{tot} = total field strength in V/m
σ = conductivity in [mho/m] or [Siemens/m]
ρ = equivalent tissue density in g/cm^3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.The power flow density is calculated assuming the excitation field to be a free space field.

$P_{pwe} = E_{tot}^2 / 3770$ or $P_{pwe} = H_{tot}^2 \cdot 37.7$

with P_{pwe} = equivalent power density of a plane wave in mW/cm^2
E_{tot} = total electric field strength in V/m
H_{tot} = total magnetic field strength in A/m

Copyright © Huawei Technologies Co., Ltd

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the dielectic parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within ± 5% of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	**Head Tissue**						
Frequency Band (MHz)	750	835	1750	1900	2300	2450	2600
Water	39.2	41.45	52.64	55.242	62.82	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.51	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.67	36.8	44.452
Ingredients (% of weight)	**Body Tissue**						
Frequency Band (MHz)	**750**	**835**	1750	**1900**	2300	**2450**	2600
Water	50.3	52.4	69.91	69.91	73.32	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.06	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.62	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16MΩ+ resistivity
HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

☐Simulating Head Liquid for 5G(HBBL3500-5800MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Mineral oil	10-30%
Emulsifiers	8-25%
Sodium salt	0-1.5%

☐Simulating Body Liquid for 5G(MBBL3500-5800MHz),Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters,Emulsifiers,Inhibitors	20-40%
Sodium salt	0-1.5%

Copyright © Huawei Technologies Co., Ltd

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Deviation (Within +/-5%)		Liquid Temp.	Test Date
		εr	σ (S/m)	εr	σ (S/m)	$\Delta\varepsilon_r$	Δσ		
750 Body	705	55.70	0.96	55.02	0.934	-1.22%	-2.76%	21.4°C	2016/11/01
	710	55.70	0.96	55.00	0.935	-1.26%	-2.64%		
	750	55.50	0.96	54.94	0.950	-1.01%	-1.08%		
835 Body	825	55.20	0.97	52.66	0.975	-4.60%	0.56%	21.5°C	2016/10/31
	835	55.20	0.97	52.64	0.979	-4.64%	0.92%		
	850	55.20	0.99	52.60	0.985	-4.71%	-0.47%		
1900 Body	1850	53.30	1.52	51.96	1.545	-2.51%	1.64%	21.3°C	2016/11/28
	1880	53.30	1.52	51.92	1.565	-2.59%	2.96%		
	1900	53.30	1.52	51.90	1.577	-2.62%	3.75%		
	1910	53.30	1.52	51.89	1.583	-2.65%	4.14%		
2450 Body	2410	52.80	1.91	53.77	1.917	1.84%	0.37%	21.6°C	2016/11/02
	2435	52.70	1.94	53.73	1.934	1.95%	-0.31%		
	2450	52.70	1.95	53.70	1.946	1.90%	-0.21%		
	2460	52.70	1.96	53.70	1.955	1.90%	-0.26%		

Table 5:Measured Tissue Parameter

Note: 1)The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2°C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2)KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3)The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).

System Check	Target SAR (1W)		Measured SAR (Normalized to 1W)		Deviation (Within +/-10%)		Liquid Temp.	Test Date
	1-g (W/kg)	10-g (W/kg)	1-g (W/kg)	10-g (W/kg)	Δ1-g	Δ10-g		
750MHz Body	8.64	5.72	8.08	5.48	-6.48%	-4.20%	21.4°C	2016/11/01
835MHz Body	9.41	6.20	9.88	6.60	4.99%	6.45%	21.5°C	2016/10/31
1900MHz Body	40.20	21.30	41.60	21.56	3.48%	1.22%	21.3°C	2016/11/28
2450MHz Body	52.10	24.70	48.40	23.00	-7.10%	-6.88%	21.6°C	2016/11/02

Table 6:System Check Results

Copyright © Huawei Technologies Co., Ltd

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 5GHz) or 100mW(above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

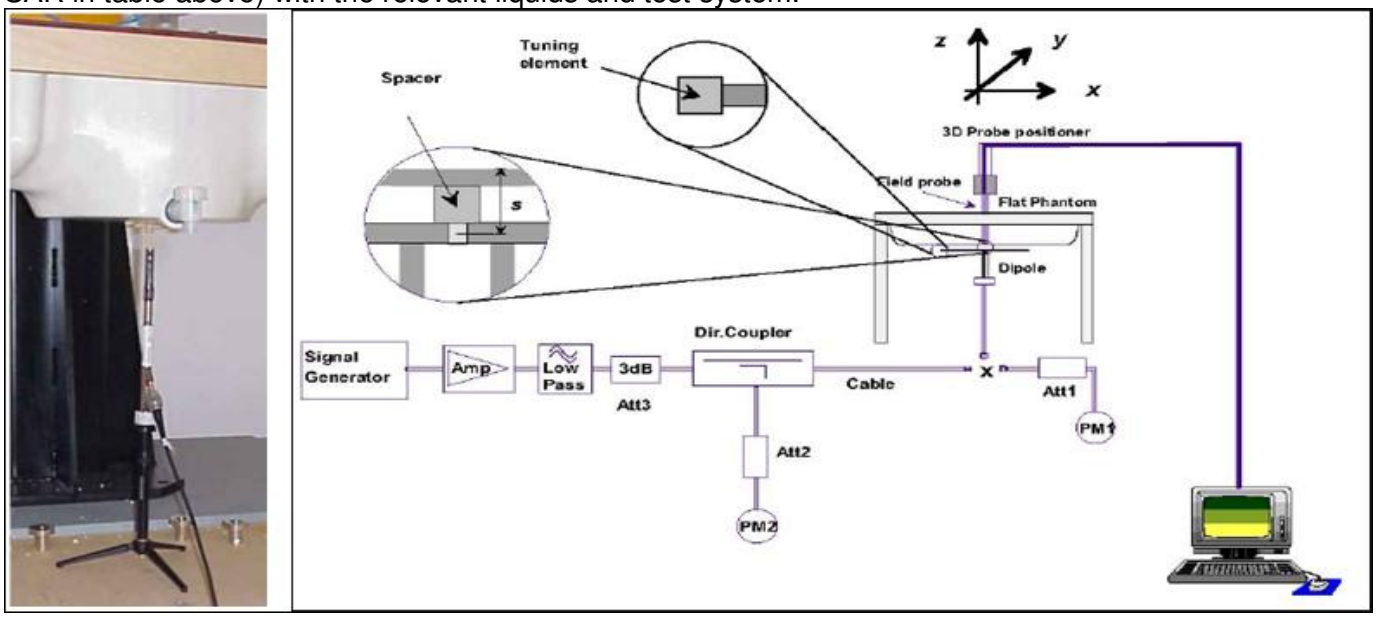

Copyright © Huawei Technologies Co., Ltd

5 SAR measurement variability and uncertainty

5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
2) When the original highest measured SAR is ⩾ 0.80 W/kg, repeat that measurement once.
3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ⩾ 1.45 W/kg (~ 10% from the 1-g SAR limit).
4) Perform a third repeated measurement only if the original, first or second repeated measurement is ⩾ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04,when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

Copyright © Huawei Technologies Co., Ltd

6 SAR Test Configuration

6.1 Test Positions Configuration

The Wi-Fi and WWAN transmitters used for hotspot mode are usually built-in within the device, such as battery-operated personal wireless routers and wireless handsets.

Per FCC KDB 941225D06, The Body SAR test separation distance for hotspot mode is determined according to device form factor. When the overall length and width of a device is > 9 cm x 5 cm, a test separation distance of 10 mm is required for hotspot mode SAR measurements. A test separation distance of 5 mm or less is required for smaller devices. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode. The SAR results are used to determine simultaneous transmission SAR test exclusion for hotspot mode; otherwise, simultaneous transmission SAR measurement is required.

Copyright © Huawei Technologies Co., Ltd

6.2 Proximity sensor Test Configuration

This device uses a proximity sensor that share the same metallic electrode as the transmitting antenna to facilitate triggering in typical user interactivity with the device.

Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the device is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes to ensure SAR compliance for the following scenarios:

Band	Sensor Trigger Distance	Full Power Level (dBm)	Reduced power Level (dBm)	Power reduction (dB)
UMTS Band II	Front side: 17mm Top side: 17mm	23.5	21.0	2.5

1) Procedures for determining proximity sensor triggering distances

Per FCC KDB 616217 D04v01, the device was tested by the test lab to determine the proximity sensor triggering distances for the Front side and each top side of the device. To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering minus 1 mm, must be used as the test separation distance for SAR testing. These SAR tests are included in addition to the SAR tests for the device touching the SAR phantom with reduced power.

FCC KDB 616217 D04v01, the proximity sensor triggering distance measurement results are as below:

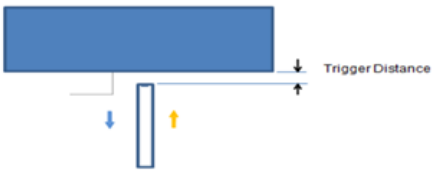

Picture: Proximity sensor triggering distances assessment Top side

Picture: Proximity sensor triggering distances assessment Front side

Table: Summary of Trigger Distances

Band(MHz)	Trigger distance-Front Side and Top Side	
	Moving toward phantom	Moving away from phantom
UMTS Band II	17mm	17mm

Note:

1) Since the capacitive proximity sensor triggering distance for the front side and top side is 17mm , a conservative distance of 16mm was tested for SAR at maximum power level.

2) SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off by AT command.

Copyright © Huawei Technologies Co., Ltd

The detailed conducted power measurement data to determine the triggering distances is as below:

The DUT(front side and top side) is moved towards the flat phantom:

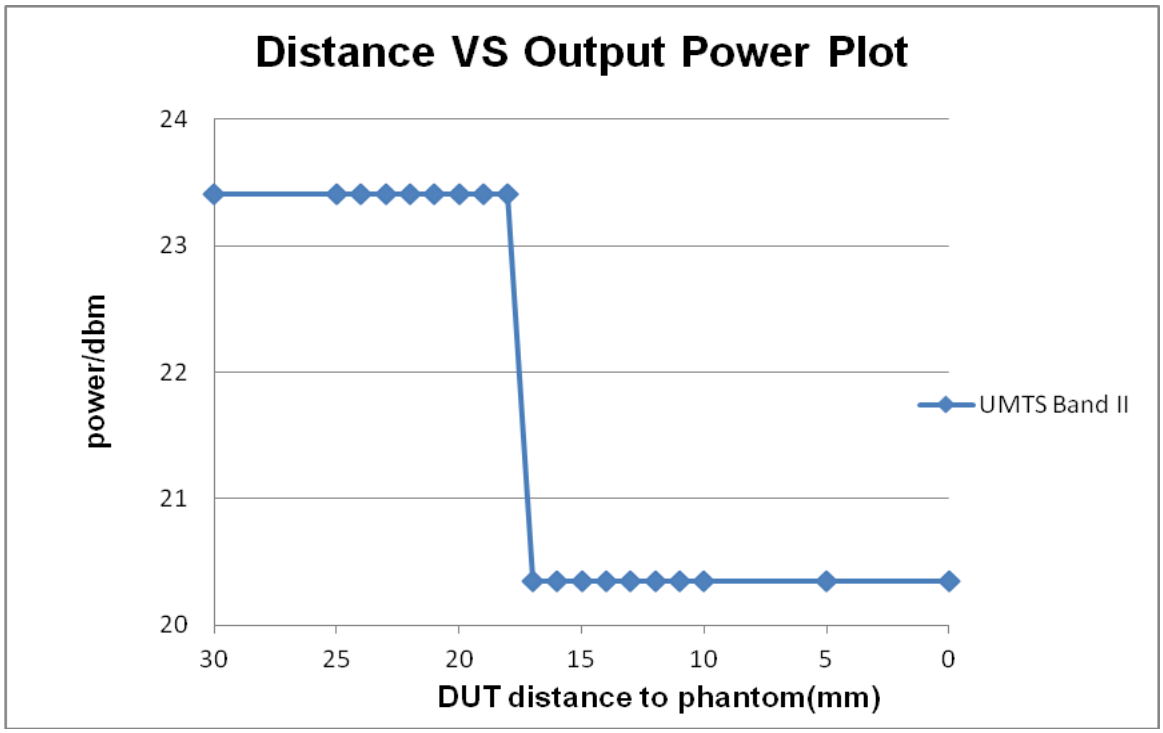

The DUT(front side and top side) is moved away from the flat phantom:

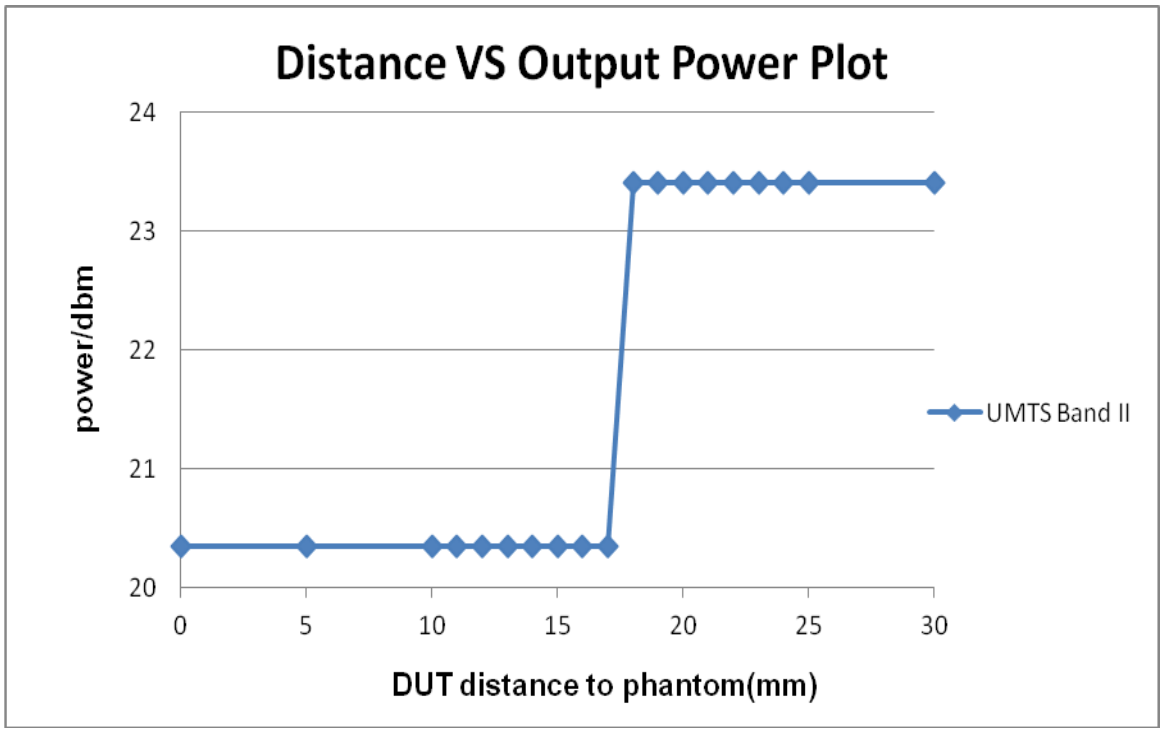

Copyright © Huawei Technologies Co., Ltd

2) Procedures for determining antenna and proximity sensor coverage

The proximity sensor and main antenna use same metallic electrode, so there is no spatial offset. Procedures for determining antenna and proximity sensor coverage is not required.

3）Procedures for determining device tilt angle influences to proximity sensor triggering

Per FCC KDB 616217 D04, the DUT was positioned directly below the flat phantom at the minimum measured trigger distance with each applicable top parallel to the base of the flat phantom for each band. The EUT was rotated about each applicable top for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

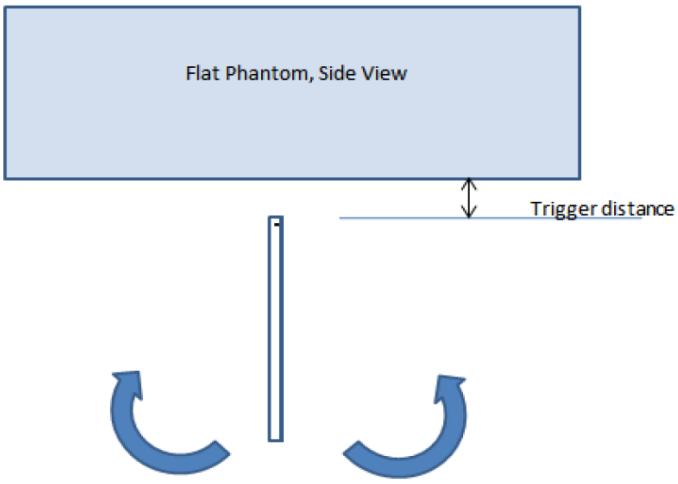

Picture: Proximity sensor tilt angle assessment (Top side)

Table: Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering(Top side)

Band (MHz)	Minimum trigger distance Per KDB616217§6.2	Minimum trigger distance at which power reduction was maintained over ±45°	Power Reduction Status										
			-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°
UMTS B2	17mm	17mm	On	On	On	On	On	On	On	On	On	On	On

4) Summary SAR test Plan for Proximity sensor power reduction scenarios

For Body SAR compliance, the device uses proximity sensor power reduction for some frequency bands of Main antenna and test positions. To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering and sensor coverage for normal and tilt positions for each applicable side triggering conditions, minus 1 mm, is used as the test separation distance for SAR testing. These SAR tests are included in addition to the SAR tests for the device touching the SAR phantom with reduced power.

Copyright © Huawei Technologies Co., Ltd

6.3 3G SAR Test Reduction Procedure

Per KDB941225 D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

6.4 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are requied in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) WCDMA

a. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Copyright © Huawei Technologies Co., Ltd

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK, ΔNACK, ΔCQI = 8. The variation of the β_c /β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test	β_c	β_d	β_d (SF)	β_c /β_d	β_{hs} (1)	CM(dB)(2)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: △ACK, △NACK and △CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2 : CM=1 for β_c/β_d= 12/15, β_{hs}/β_c = 24/15. For all other combinations of DPDCH,DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3 : For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to β_c = 11/15 and β_d = 15/15

Table 7: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 8:settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200

Copyright © Huawei Technologies Co., Ltd

7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 9:HSDPA UE category

4) HSUPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Device' sections of 3G device.

Copyright © Huawei Technologies Co., Ltd

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (1)	β_{ec}	β_{ed}	β_{ec} (SF)	β_{ed} (code)	CM (2) (dB)	MPR (dB)	AG (4) Index	E-TFCI
1	11/15 (3)	15/15 (3)	64	11/15 (3)	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1}:47/15 β_{ed2}:47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (4)	15/15 (4)	64	15/15 (4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference

Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$

Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 10:Subtests for UMTS Release 6 HSUPA

Copyright © Huawei Technologies Co., Ltd

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Speading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).						

Table 11:HSUPA UE category

5) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH _Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Copyright © Huawei Technologies Co., Ltd

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 12:settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.

2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

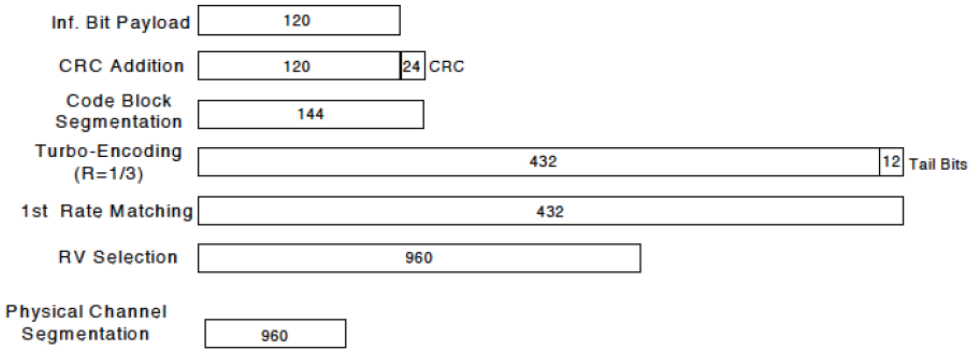

Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (1)	CM(dB)(2)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2 : CM=1 for β_c/β_d= 12/15, β_{hs}/β_c = 24/15. For all other combinations of DPDCH,DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3 : For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to β_c = 11/15 and β_d = 15/15

Up commands are set continuously to set the UE to Max power.

Note:

1.The Dual Carriers transmission only applies to HSDPA physical channels

2.The Dual Carriers belong to the same Node and are on adjacent carriers.

3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation

4.The Dual Carriers operate in the same frequency band .

5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.

6.The device doesn't support carrier aggregation for it just can operate in Release 8.

Copyright © Huawei Technologies Co., Ltd

6.5 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r04. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing.Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of “NS_01”on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

Copyright © Huawei Technologies Co., Ltd

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

Copyright © Huawei Technologies Co., Ltd

6.6 WiFi Test Configuration

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test,at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227D01 are applied.

6.6.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet , procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated(peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

6.6.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01v02). SAR test reduction of subsequent highest output test channels is based on the *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

6.6.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

Copyright © Huawei Technologies Co., Ltd

6.6.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

1) When the *reported* SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01v02) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2) When the *reported* SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any *reported* SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01v02r02). SAR is not required for the following 2.4 GHz OFDM conditions.

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

6.6.5 MIMO SAR Considerations

Per KDB 248227D01, simultaneous transmission provisions in KDB Publication 447498 should be used to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1-g SAR single transmission SAR measurement is <1.6W/kg, no additional SAR measurements for MIMO are required. Alternatively,SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

Copyright © Huawei Technologies Co., Ltd

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200&CMW500 was used. SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

7.1.1 Conducted power measurements of UMTS Band V

UMTS Band V		Tune-up	Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	**24.00**	**23.55**	**23.62**	**23.51**
HSDPA	Subtest 1	23.50	21.87	22.05	21.84
	Subtest 2	23.50	21.53	21.58	21.71
	Subtest 3	22.50	20.73	20.80	20.61
	Subtest 4	22.50	20.71	20.99	20.59
HSUPA	Subtest 1	22.50	22.21	22.21	22.18
	Subtest 2	20.50	20.32	20.45	20.41
	Subtest 3	21.50	21.28	21.32	21.39
	Subtest 4	20.50	20.24	20.34	20.32
	Subtest 5	22.50	22.20	22.20	22.09
DC-HSDPA	Subtest 1	23.50	21.81	22.01	21.81
	Subtest 2	23.50	21.51	21.55	21.72
	Subtest 3	22.50	20.70	20.78	20.62
	Subtest 4	22.50	20.67	20.96	20.51

Table 13: Conducted power measurement results of UMTS Band V

Note:

1) The conducted power of UMTS Band V is measured with RMS detector.

2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).

3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Copyright © Huawei Technologies Co., Ltd

7.1.2 Conducted power measurements of UMTS Band II

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	**23.50**	**22.77**	**23.35**	**23.48**
HSDPA	Subtest 1	23.50	21.78	22.37	22.47
	Subtest 2	23.50	21.58	22.16	22.31
	Subtest 3	22.50	20.69	21.30	21.46
	Subtest 4	22.50	20.82	21.29	21.43
HSUPA	Subtest 1	22.50	21.41	21.43	21.42
	Subtest 2	20.50	19.65	19.68	19.69
	Subtest 3	21.50	20.63	20.62	20.64
	Subtest 4	20.50	19.58	19.60	19.60
	Subtest 5	22.50	21.42	21.42	21.45
DC-HSDPA	Subtest 1	23.50	21.72	22.36	22.44
	Subtest 2	23.50	21.53	22.12	22.30
	Subtest 3	22.50	20.62	21.23	21.39
	Subtest 4	22.50	20.80	21.21	21.40

Table 14: Conducted power measurement results of UMTS Band II with Proximity sensor deactivated

Copyright © Huawei Technologies Co., Ltd

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	**21.00**	**19.58**	**20.35**	**20.39**
HSDPA	Subtest 1	21.00	19.07	19.38	19.46
	Subtest 2	21.00	19.02	19.08	19.16
	Subtest 3	20.00	18.03	18.20	18.30
	Subtest 4	20.00	18.08	18.20	18.29
HSUPA	Subtest 1	20.50	19.85	19.86	19.87
	Subtest 2	18.50	18.12	18.16	18.15
	Subtest 3	19.50	19.07	19.10	19.10
	Subtest 4	18.50	18.15	18.17	18.17
	Subtest 5	20.00	19.85	19.88	19.86
DC-HSDPA	Subtest 1	21.00	19.06	19.31	19.41
	Subtest 2	21.00	19.03	19.06	19.11
	Subtest 3	20.00	18.04	18.17	18.23
	Subtest 4	20.00	18.05	18.18	18.26

Table 15: Conducted power measurement results of UMTS Band II with Proximity sensor activated

Note:

1) The conducted power of UMTS Band II is measured with RMS detector.

2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).

3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is ≤ ¼ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Copyright © Huawei Technologies Co., Ltd

7.1.3 Conducted power measurements of LTE Band V

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel 20425CH	Channel 20525CH	Channel 20625CH
5MHz	QPSK	1	0	23.5	22.38	22.33	22.33
		1	13	23.5	22.37	22.35	22.34
		1	24	23.5	22.33	22.31	22.29
		12	0	22.5	21.28	21.25	21.26
		12	6	22.5	21.29	21.25	21.22
		12	13	22.5	21.26	21.22	21.23
		25	0	22.5	21.30	21.27	21.27
	16QAM	1	0	22.5	21.49	21.45	21.42
		1	13	22.5	21.49	21.44	21.48
		1	24	22.5	21.39	21.37	21.41
		12	0	21.5	20.39	20.32	20.34
		12	6	21.5	20.37	20.36	20.37
		12	13	21.5	20.35	20.32	20.32
		25	0	21.5	20.30	20.29	20.25
	64QAM	1	0	21.7	20.25	20.30	20.51
		1	13	21.7	20.26	20.31	20.49
		1	24	21.7	20.24	20.30	20.51
		12	0	20.5	19.17	19.30	19.47
		12	6	20.5	19.12	19.34	19.47
		12	13	20.5	19.15	19.36	19.46
		25	0	20.5	19.17	19.35	19.36

Copyright © Huawei Technologies Co., Ltd

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel 20450CH	Channel 20525CH	Channel 20600CH
10MHz	QPSK	1	0	23.50	22.16	22.23	22.32
		1	25	23.50	**22.17**	**22.24**	**22.34**
		1	49	23.50	22.15	22.21	22.31
		25	0	22.50	**21.22**	**21.29**	**21.36**
		25	13	22.50	21.21	21.28	21.35
		25	25	22.50	21.16	21.23	21.30
		50	0	22.50	21.21	21.25	**21.34**
	16QAM	1	0	22.50	21.16	21.14	21.25
		1	25	22.50	21.07	21.09	21.23
		1	49	22.50	21.04	21.13	21.21
		25	0	21.50	20.25	20.27	20.38
		25	13	21.50	20.22	20.29	20.39
		25	25	21.50	20.19	20.24	20.36
		50	0	21.50	20.19	20.26	20.33
	64QAM	1	0	21.70	20.48	20.23	20.31
		1	25	21.70	20.47	20.26	20.32
		1	49	21.70	20.46	20.24	20.30
		25	0	20.50	19.31	19.41	19.32
		25	13	20.50	19.30	19.42	19.32
		25	25	20.50	19.31	19.40	19.30
		50	0	20.50	19.30	19.35	19.32

Table 16: Conducted power measurement results of LTE Band V

Copyright © Huawei Technologies Co., Ltd

7.1.4 Conducted power measurements of LTE Band XVII

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel 23755CH	Channel 23790CH	Channel 23825CH
5MHz	QPSK	1	0	23.5	22.70	22.66	22.74
		1	13	23.5	22.70	22.68	22.78
		1	24	23.5	22.67	22.63	22.72
		12	0	22.5	21.59	21.58	21.65
		12	6	22.5	21.60	21.55	21.66
		12	13	22.5	21.57	21.56	21.65
		25	0	22.5	21.63	21.58	21.67
	16QAM	1	0	22.5	21.78	21.74	21.80
		1	13	22.5	21.81	21.77	21.84
		1	24	22.5	21.73	21.72	21.81
		12	0	21.5	20.67	20.64	20.72
		12	6	21.5	20.71	20.66	20.77
		12	13	21.5	20.64	20.62	20.72
		25	0	21.5	20.61	20.59	20.67
	64QAM	1	0	21.7	20.46	20.43	20.59
		1	13	21.7	20.45	20.43	20.59
		1	24	21.7	20.46	20.42	20.60
		12	0	20.5	19.37	19.43	19.51
		12	6	20.5	19.36	19.42	19.50
		12	13	20.5	19.35	19.43	19.53
		25	0	20.5	19.38	19.45	19.41

Copyright © Huawei Technologies Co., Ltd

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel 23780CH	Channel 23790CH	Channel 23800CH
10MHz	QPSK	1	0	23.5	22.59	**22.61**	22.59
		1	25	23.5	22.55	22.57	22.52
		1	49	23.5	22.52	22.53	22.52
		25	0	22.5	21.59	21.61	21.60
		25	13	22.5	21.58	**21.63**	21.62
		25	25	22.5	21.54	21.55	21.54
		50	0	22.5	21.56	21.57	21.58
	16QAM	1	0	22.5	21.45	21.45	21.50
		1	25	22.5	21.45	21.46	21.45
		1	49	22.5	21.43	21.42	21.46
		25	0	21.5	20.62	20.63	20.60
		25	13	21.5	20.59	20.58	20.57
		25	25	21.5	20.55	20.56	20.57
		50	0	21.5	20.57	20.58	20.57
	64QAM	1	0	21.7	20.46	20.57	20.21
		1	25	21.7	20.45	20.57	20.23
		1	49	21.7	20.47	20.58	20.22
		25	0	20.5	19.52	19.45	19.46
		25	13	20.5	19.53	19.47	19.46
		25	25	20.5	19.51	19.45	19.47
		50	0	20.5	19.48	19.48	19.48

Table 17: Conducted power measurement results of LTE Band XVII

Copyright © Huawei Technologies Co., Ltd

7.1.5 Conducted power measurements of WiFi 2.4G

Mode	Ant	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	Ant 1	1	2412	1M	16.9	15.11	No
		6	2437		16.9	**15.32**	Yes
		11	2462		16.9	15.31	No
	Ant 2	1	2412		16.9	15.49	No
		6	2437		16.9	**15.53**	Yes
		11	2462		16.9	15.38	No
802.11g	Ant 1	1	2412	6M	16.0	Not Required	No
		6	2437		16.0	Not Required	No
		11	2462		16.0	Not Required	No
	Ant 2	1	2412		16.0	Not Required	No
		6	2437		16.0	Not Required	No
		11	2462		16.0	Not Required	No
802.11n 20M SISO	Ant 1	1	2412	6.5M	15.0	Not Required	No
		6	2437		15.0	Not Required	No
		11	2462		15.0	Not Required	No
	Ant 2	1	2412		15.0	Not Required	No
		6	2437		15.0	Not Required	No
		11	2462		15.0	Not Required	No
802.11n 40M SISO	Ant 1	3	2422	13.5M	15.0	Not Required	No
		6	2437		15.0	Not Required	No
		9	2452		15.0	Not Required	No
	Ant 2	3	2422	13.5M	15.0	Not Required	No
		6	2437		15.0	Not Required	No
		9	2452		15.0	Not Required	No
802.11n 20M MIMO	Sum	1	2412	13M	16.0	14.06	No
		6	2437		16.0	14.15	No
		11	2462		16.0	14.14	No
802.11n 40M MIMO	Sum	3	2422	27M	16.0	14.15	No
		6	2437		16.0	**14.27**	Yes
		9	2452		16.0	14.22	No

Table 18: Conducted power measurement results of WiFi 2.4G

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

Copyright © Huawei Technologies Co., Ltd

7.1.6 Conducted power measurements of BT

The output power of BT antenna is as following:

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	39CH	78CH
DH5	6.0	4.39	**4.98**	4.16
2DH5	6.0	1.06	2.28	1.10
3DH5	6.0	0.96	2.21	0.86

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	19CH	39CH
BLE	4.0	0.18	1.44	-0.34

Table 19: Conducted power measurement results of BT.

Note: The conducted power of BT is measured with RMS detector.

Copyright © Huawei Technologies Co., Ltd

7.2 SAR measurement Results

General Notes:

1) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.

2) Per KDB447498 D01v06, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

● ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.

● ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.

● ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.

3) Per KDB865664 D01,for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg; if the deviation among the repeated measurement is ≤20%, and the measured SAR <1.45W/Kg, only one repeated measurement is required.

4) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm,such position does not need to be tested.

5) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing(Refer to the blue SAR test results in the tables of Section 7.3 and appendix B for detailed SAR plots).

6) Per KDB 648474 D04, for handsets with additional batteries, the highest reported SAR for each wireless technology, frequency band, operating mode and applicable exposure condition (head, body-worn accessory, hotspot mode, etc.) must be repeated with the specific accessory attached. In addition, for test cases where the measured SAR for a handset is greater than 1.2 W/kg, these tests should also be repeated with the additional batteries.

UMTS Notes:

1) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Copyright © Huawei Technologies Co., Ltd

LTE Notes:

1) The LTE test configurations are determined according to KDB941225 D05 SAR.The general test procedures used for SAR testing can be found in Section 6.5.

2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator.SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames(maximum TTI)

WiFi Notes:

Per KDB248227D01:

1) When reported SAR for the initial test position is ≤ 0.4W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

2) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498D01. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

3) For WiFi 2.4G , SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. SAR is not required for the 2.4 GHz 802.11g/n OFDM conditions when KDB Publication 447498 SAR test exclusion applies to the OFDM configuration or when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ⩽ 1.2 W/kg.

Copyright © Huawei Technologies Co., Ltd

7.2.1 SAR measurement Result of UMTS Band II

Test Position of Body 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Front Side	9400/1880	RMC	0.706	0.425	0.04	20.35	21.00	0.820	/
Front Side	9262/1852.4	RMC	0.702	0.409	-0.02	19.58	21.00	0.974	/
Front Side	9538/1907.6	RMC	0.715	0.427	-0.02	20.39	21.00	0.823	/
Back Side	9400/1880	RMC	0.675	0.418	-0.05	20.35	21.00	0.784	/
Left Side	9400/1880	RMC	0.390	0.240	0.01	20.35	21.00	0.453	/
Right Side	9400/1880	RMC	0.162	0.094	0.07	20.35	21.00	0.188	/
Top Side	9400/1880	RMC	**0.729**	0.394	0.04	20.35	21.00	0.847	Yes
Top Side	9262/1852.4	RMC	0.710	0.379	0.01	19.58	21.00	0.985	/
Top Side	9538/1907.6	RMC	0.709	0.381	0.02	20.39	21.00	0.816	/
Tested at the worst position with battery 2#									
Top Side	9262/1852.4	RMC	0.712	0.381	0.02	19.58	21.00	**0.987**	/

Table 20: Body SAR test results of UMTS Band II

Test Position of Body 16mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Addtional SAR test at maximum power level and conservative triggering distance with sensor off									
Front Side	9400/1880	RMC	0.373	0.237	-0.02	23.35	23.50	0.386	/
Top Side	9400/1880	RMC	0.389	0.221	0.00	23.35	23.50	**0.403**	Yes

Table 21: Body SAR test results of UMTS Band II(Full power,sensor off)

Copyright © Huawei Technologies Co., Ltd

7.2.2 SAR measurement Result of UMTS Band V

Test Position of Body 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.860	0.605	-0.07	23.62	24.00	0.939	/
Front Side	4132/826.4	RMC	0.772	0.538	-0.12	23.55	24.00	0.856	/
Front Side	4233/846.6	RMC	0.897	0.639	-0.08	23.51	24.00	1.004	/
Back Side	4182/836.4	RMC	0.906	0.619	-0.07	23.62	24.00	0.989	/
Back Side	4132/826.4	RMC	0.801	0.538	-0.09	23.55	24.00	0.888	/
Back Side	4233/846.6	RMC	0.962	0.665	-0.03	23.51	24.00	1.077	/
Back Side-repeated	4233/846.6	RMC	**0.967**	0.669	-0.05	23.51	24.00	**1.082**	Yes
Left Side	4182/836.4	RMC	0.375	0.261	-0.02	23.62	24.00	0.409	/
Right Side	4182/836.4	RMC	0.340	0.247	-0.09	23.62	24.00	0.371	/
Top Side	4182/836.4	RMC	0.009	0.057	0.04	23.62	24.00	0.010	/
Tested at the worst position with battery 2#									
Back Side	4233/846.6	RMC	0.953	0.662	-0.06	23.51	24.00	1.067	/

Table 22: Body SAR test results of UMTS Band V

Copyright © Huawei Technologies Co., Ltd

7.2.3 SAR measurement Result of LTE Band V

Test Position of Body 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20600/844	10M QPSK 1RB#25	0.938	0.701	-0.04	22.34	23.50	1.225	/
Front Side	20450/829	10M QPSK 1RB#25	0.923	0.681	-0.01	22.17	23.50	1.254	/
Front Side	20525/836.5	10M QPSK 1RB#25	0.943	0.701	-0.09	22.24	23.50	1.260	/
Back Side	20600/844	10M QPSK 1RB#25	**1.020**	0.743	0.00	22.34	23.50	1.332	Yes
Back Side-repeated	20600/844	10M QPSK 1RB#25	0.993	0.725	-0.01	22.34	23.50	1.297	/
Back Side	20450/829	10M QPSK 1RB#25	0.975	0.698	-0.12	22.17	23.50	1.324	/
Back Side	20525/836.5	10M QPSK 1RB#25	1.010	0.730	-0.06	22.24	23.50	**1.350**	/
Back Side-holder perturbation verification*	20525/836.5	10M QPSK 1RB#25	0.977	0.695	0.00	22.24	23.50	1.306	/
Left Side	20600/844	10M QPSK 1RB#25	0.645	0.433	-0.05	22.34	23.50	0.842	/
Left Side	20450/829	10M QPSK 1RB#25	0.598	0.402	0.00	22.17	23.50	0.812	/
Left Side	20525/836.5	10M QPSK 1RB#25	0.619	0.416	-0.03	22.24	23.50	0.827	/
Right Side	20600/844	10M QPSK 1RB#25	0.574	0.388	-0.01	22.34	23.50	0.750	/
Top Side	20600/844	10M QPSK 1RB#25	0.077	0.047	-0.08	22.34	23.50	0.101	/
50%RB									
Front Side	20600/844	10M QPSK 50%RB#0	0.744	0.506	-0.03	21.36	22.50	0.967	/
Front Side	20450/829	10M QPSK 50%RB#0	0.686	0.477	-0.03	21.22	22.50	0.921	/
Front Side	20525/836.5	10M QPSK 50%RB#0	0.753	0.511	-0.03	21.29	22.50	0.995	/
Back Side	20600/844	10M QPSK 50%RB#0	0.799	0.543	-0.04	21.36	22.50	1.039	/
Back Side	20450/829	10M QPSK 50%RB#0	0.780	0.524	-0.03	21.22	22.50	1.047	/
Back Side	20525/836.5	10M QPSK 50%RB#0	0.809	0.545	-0.06	21.29	22.50	1.069	/
Left Side	20600/844	10M QPSK 50%RB#0	0.504	0.340	-0.02	21.36	22.50	0.655	/
Right Side	20600/844	10M QPSK 50%RB#0	0.434	0.296	-0.02	21.36	22.50	0.564	/
Top Side	20600/844	10M QPSK 50%RB#0	0.061	0.038	-0.01	21.36	22.50	0.079	/

Copyright © Huawei Technologies Co., Ltd

100%RB									
Front Side	20600/844	10M QPSK 100%RB#0	0.724	0.539	-0.02	21.34	22.50	0.946	/
Back Side	20600/844	10M QPSK 100%RB#0	0.798	0.580	-0.03	21.34	22.50	1.042	/
Left Side	20600/844	10M QPSK 100%RB#0	0.497	0.354	-0.03	21.34	22.50	0.649	/
Tested at the worst position with battery 2#									
Back Side	20600/844	10M QPSK 1RB#25	0.967	0.708	-0.04	22.34	23.50	1.263	/

Table 23: Body SAR test results of LTE Band V

Note:* According to 201610 FCC TCB workshop RF exposure slides, when the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands.

Copyright © Huawei Technologies Co., Ltd

7.2.4 SAR measurement Result of LTE Band XVII

Test Position of Body 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	23790/710	10M QPSK 1RB#0	0.424	0.302	-0.03	22.61	23.50	0.520	/
Back Side	23790/710	10M QPSK 1RB#0	0.429	0.297	-0.05	22.61	23.50	0.527	/
Left Side	23790/710	10M QPSK 1RB#0	0.191	0.135	-0.08	22.61	23.50	0.234	/
Right Side	23790/710	10M QPSK 1RB#0	0.141	0.104	-0.07	22.61	23.50	0.173	/
Top Side	23790/710	10M QPSK 1RB#0	0.063	0.042	-0.10	22.61	23.50	0.077	/
50%RB									
Front Side	23790/710	10M QPSK 50%RB#13	0.344	0.246	0.00	21.63	22.50	0.420	/
Back Side	23790/710	10M QPSK 50%RB#13	0.359	0.249	0.03	21.63	22.50	0.439	/
Left Side	23790/710	10M QPSK 50%RB#13	0.163	0.115	-0.06	21.63	22.50	0.199	/
Right Side	23790/710	10M QPSK 50%RB#13	0.119	0.087	-0.01	21.63	22.50	0.145	/
Top Side	23790/710	10M QPSK 50%RB#13	0.052	0.035	-0.06	21.63	22.50	0.063	/
Tested at the worst position with battery 2#									
Back Side	23790/710	10M QPSK 1RB#0	**0.453**	0.315	-0.03	22.61	23.50	**0.556**	Yes

Table 24: Body SAR test results of LTE Band XVII

Copyright © Huawei Technologies Co., Ltd

7.2.5 SAR measurement Result of WiFi 2.4G

Test Position of Body 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g Area Scan	1-g Zoom Scan					
Test data with battery 1#									
SISO Ant 1									
Front Side	6/2437	802.11 b	0.116	0.110	0.08	15.32	16.90	0.158	/
Back Side	6/2437	802.11 b	0.114	0.109	-0.01	15.32	16.90	0.157	/
Right Side	6/2437	802.11 b	0.079	0.073	-0.02	15.32	16.90	0.105	/
Bottom Side	6/2437	802.11 b	0.026	/	0.18	15.32	16.90	/	/
SISO Ant 2									
Front Side	6/2437	802.11 b	0.131	0.127	0.12	15.53	16.90	0.174	/
Back Side	6/2437	802.11 b	0.101	0.098	0.01	15.53	16.90	0.134	/
Left Side	6/2437	802.11 b	0.131	0.130	0.04	15.53	16.90	0.178	/
Bottom Side	6/2437	802.11 b	0.076	0.073	0.13	15.53	16.90	0.100	/
MIMO(802.11n 40M)									
Front Side	6/2437	802.11 n	0.188	**0.177**	-0.13	14.27	16.00	0.264	Yes
Back Side	6/2437	802.11 n	0.114	0.109	-0.01	14.27	16.00	0.162	/
Left Side	6/2437	802.11 n	0.098	0.099	-0.01	14.27	16.00	0.147	/
Right Side	6/2437	802.11 n	0.051	0.028	-0.09	14.27	16.00	0.041	/
Bottom Side	6/2437	802.11 n	0.059	0.058	0.03	14.27	16.00	0.087	/
Tested at the worst position with battery 2#									
Front Side	6/2437	802.11 n	0.186	0.175	-0.13	14.27	16.00	0.261	/

Copyright © Huawei Technologies Co., Ltd

According to KDB248227 D01,The reported SAR must be scaled to 100% transmission duty factor to determine compliance at maximum tune-up tolerance limit.The scaled reported SAR is presented as below.

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	Scaled SAR_{1-g} (W/kg)	Actual duty factor	Maximum duty factor	Reported SAR_{1-g} (W/kg)
Test data with battery 1#						
SISO Ant 1						
Front Side	6/2437	802.11 b	0.158	99.00%	100%	0.160
Back Side	6/2437	802.11 b	0.157	99.00%	100%	0.158
Right Side	6/2437	802.11 b	0.105	99.00%	100%	0.106
Bottom Side	6/2437	802.11 b	/	99.00%	100%	/
SISO Ant 2						
Front Side	6/2437	802.11 b	0.174	99.00%	100%	0.176
Back Side	6/2437	802.11 b	0.134	99.00%	100%	0.136
Left Side	6/2437	802.11 b	0.178	99.00%	100%	0.180
Bottom Side	6/2437	802.11 b	0.100	99.00%	100%	0.101
MIMO(802.11n 40M)						
Front Side	6/2437	802.11 n	0.264	88.00%	100%	**0.300**
Back Side	6/2437	802.11 n	0.162	88.00%	100%	0.184
Left Side	6/2437	802.11 n	0.147	88.00%	100%	0.167
Right Side	6/2437	802.11 n	0.041	88.00%	100%	0.047
Bottom Side	6/2437	802.11 n	0.087	88.00%	100%	0.098
Tested at the worst position with battery 2#						
Front Side	6/2437	802.11 n	0.261	88.00%	100%	0.296

Mode	Tune-up (dBm)	Tune-up (mW)	Hightest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	16.90	48.98	0.180	/	Yes
802.11g	16.00	39.81	/	0.146	No
802.11n SISO 20M	15.00	31.62	/	0.116	No
802.11n SISO 40M	15.00	31.62	/	0.116	No
Mode	**Tune-up (dBm)**	**Tune-up (mW)**	**Hightest Reported SAR(W/kg)**	**Adjusted SAR (W/kg)**	**SAR test**
802.11n MIMO 40M	16.00	39.81	0.300	/	Yes
802.11n MIMO 20M	16.00	39.81	/	0.300	No

Note: Per KDB248227D01, for Body SAR test of WiFi 2.4G:

1) SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure.

2) For WiFi 2.4G SISO, SAR is measured for 802.11b DSSS using the initial test position procedure. As the highest reported SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

3) For WiFi 2.4G MIMO, SAR is measured for 802.11n 40M MIMO using the initial test position procedure according to the specified maximum output power and maximum bandwidth. As the the adjusted SAR is < 1.2 W/kg, so SAR test for OFDM 802.11 n 20M MIMO is not required.

Copyright © Huawei Technologies Co., Ltd

7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498 D01 General RF Exposure Guidance v06.

The location of the antennas inside the device is shown as below picture:

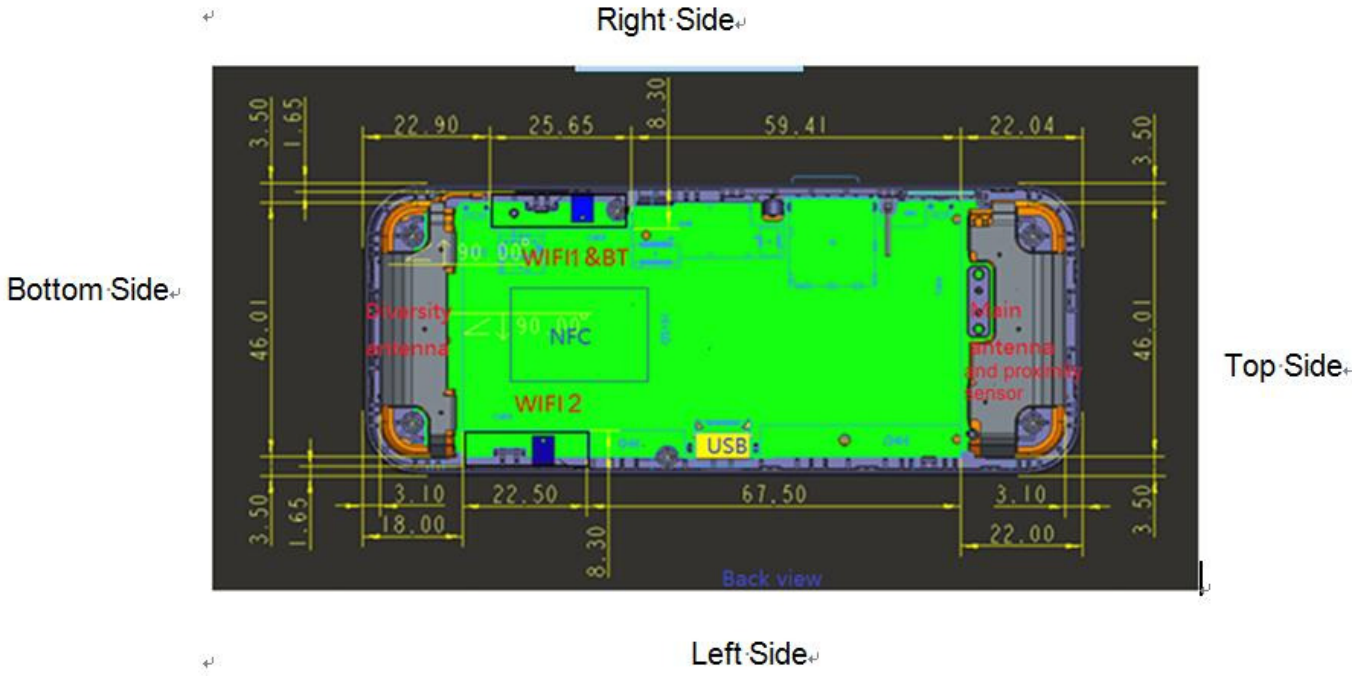

Note:

1) The Div antenna does not have transmit function.

2) The NFC antenna does not have the transmitter function

The SAR measurement Positions of each band are as below:

Mode	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Main antenna	Yes	Yes	Yes	Yes	Yes	No
WiFi 2.4G Ant 1 & BT	Yes	Yes	No	Yes	No	Yes
WiFi 2.4G Ant 2	Yes	Yes	Yes	No	No	Yes
WiFi 2.4G MIMO	Yes	Yes	Yes	Yes	No	Yes

Note: Per KDB 941225 D06, particular DUT edges were not required to be evaluated for SAR if the antenna-to-edge distance is greater than 2.5cm.

Copyright © Huawei Technologies Co., Ltd

7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498D01v06: the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)] ≤ 3.0 for 1-g SAR and ≤ 7.5 for product specific 10-g SAR, where:

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body	6.00	3.98	10	2.480	0.63	3.00	Yes

Table 25: Standalone SAR test exclusion for BT

Note:

1)* - maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] • [√f(GHz)/x] W/kg for test separation distances ≤ 50 mm,where x = 7.5 for 1-g SAR and x = 18.75 for 10-g SAR.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/kg)*
BT	Body	6.00	3.98	10	2.480	7.50	0.084

Table 26: Estimated SAR calculation for BT

Note:

1) * - maximum possible output power declared by manufacturer

Copyright © Huawei Technologies Co., Ltd

7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Body
1	UMTS/LTE + WiFi 2.4G SISO	Yes
2	UMTS/LTE + WiFi 2.4G MIMO	Yes
3	UMTS/LTE + BT	Yes

Table 27: Simultaneous Transmission Possibilities

Note:

1) WiFi 2.4G and BT can't transmit simutanously.

7.3.3 SAR Summation Scenario

Test Position		Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
MAX 1-g SAR (W/kg)	UMTS Band II	0.974	0.784	0.453	0.188	0.987	/
	UMTS Band V	1.004	1.082	0.409	0.371	0.010	/
	LTE Band V	1.260	1.350	0.842	0.750	0.101	/
	LTE Band XVII	0.520	0.527	0.234	0.173	0.077	/
	WiFi 2.4G Ant1 SISO	0.160	0.160	/	0.160	/	0.160
	BT	0.084	0.084	/	0.084	/	0.084
Σ1-g SAR(W/kg)		1.420	**1.510**	0.842	0.910	0.987	0.160

Table 28: SAR Simultaneous Tx Combination of Main Antenna and WiFi 2.4G Ant1 SISO & BT

Copyright © Huawei Technologies Co., Ltd

Test Position		Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
MAX 1-g SAR (W/kg)	UMTS Band II	0.974	0.784	0.453	0.188	0.987	/
	UMTS Band V	1.004	1.082	0.409	0.371	0.010	/
	LTE Band V	1.260	1.350	0.842	0.750	0.101	/
	LTE Band XVII	0.520	0.527	0.234	0.173	0.077	/
	WiFi 2.4G Ant2 SISO	0.176	0.180	0.180	/	/	0.180
Σ1-g SAR(W/kg)		1.436	**1.530**	1.022	0.750	0.987	0.180

Table 29: SAR Simultaneous Tx Combination of Main Antenna and WiFi 2.4G Ant2 SISO

Test Position		Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
MAX 1-g SAR (W/kg)	UMTS Band II	0.974	0.784	0.453	0.188	0.987	/
	UMTS Band IV	1.004	1.082	0.409	0.371	0.010	/
	LTE Band V	1.260	1.350	0.842	0.750	0.101	/
	LTE Band XVII	0.520	0.527	0.234	0.173	0.077	/
	WiFi 2.4G MIMO	0.300	0.184	0.300	0.300	/	0.300
Σ1-g SAR(W/kg)		**1.560**	1.534	1.142	1.050	0.987	0.300

Table 30: SAR Simultaneous Tx Combination of Main Antenna and WiFi 2.4G MIMO

7.3.4 Simultaneous Transmission Conlcusion

The above numeral summed SAR results and/or SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v06.

Copyright © Huawei Technologies Co., Ltd

Appendix A. System Check Plots
(Pls See Appendix No.: SYBH(Z-SAR)019102016-2A, total: 5 pages)

Appendix B. SAR Measurement Plots
(Pls See Appendix No.: SYBH(Z-SAR)019102016-2B, total: 7 pages)

Appendix C. Calibration Certificate
(Pls See Appendix No.: SYBH(Z-SAR)019102016-2C, total: 133 pages)

Appendix D. Photo documentation
(Pls See Appendix No.: SYBH(Z-SAR)019102016-2D, total: 5 pages)

End

Copyright © Huawei Technologies Co., Ltd