


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Horizontal

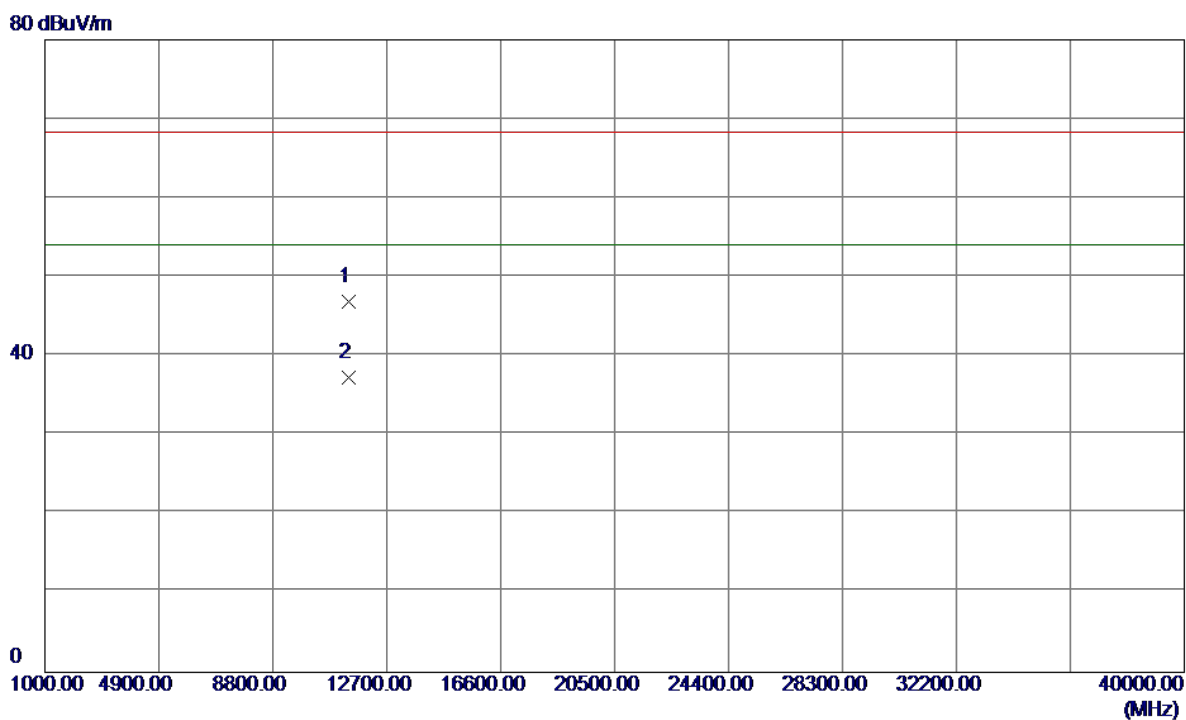

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11400.0500	30.14	16.70	46.84	68.30	-21.46	Peak	
2	11400.0500	20.64	16.70	37.34	54.00	-16.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

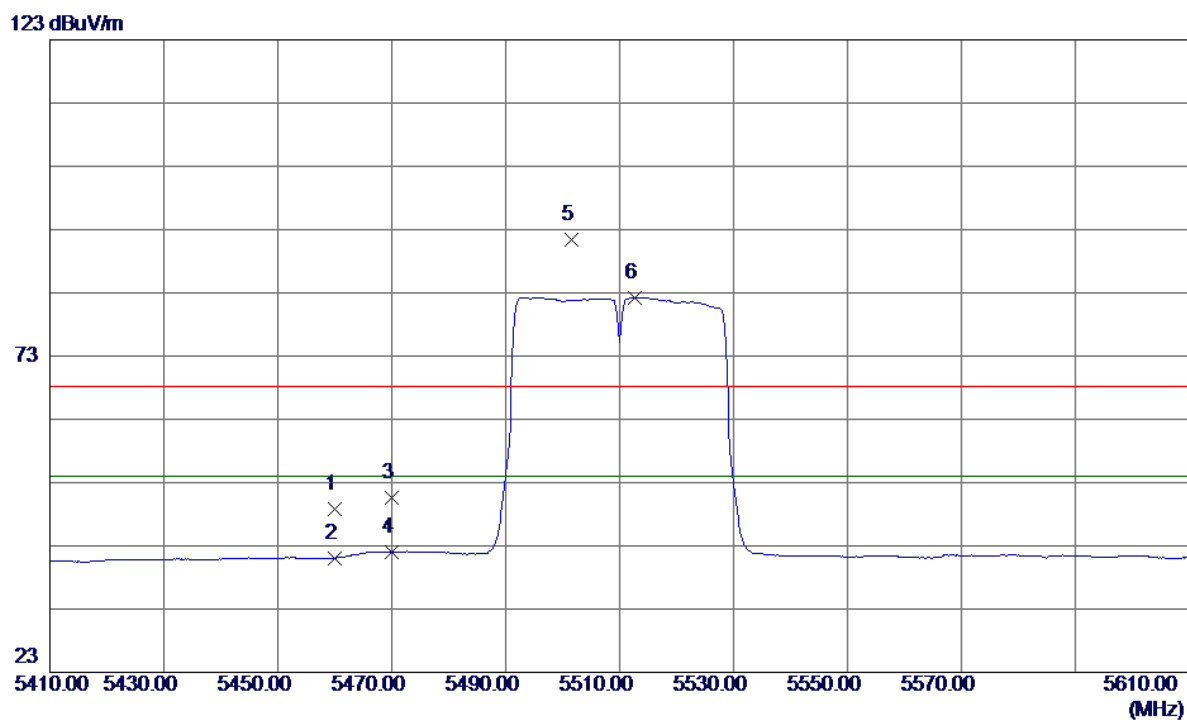


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	7.89	40.88	48.77	68.30	-19.53	Peak	
2	5460.0000	0.14	40.88	41.02	54.00	-12.98	AVG	
3	5470.0000	9.74	40.90	50.64	68.30	-17.66	Peak	
4	5470.0000	1.13	40.90	42.03	54.00	-11.97	AVG	
5	5501.6000	50.37	40.96	91.33	68.30	23.03	Peak	no limit
6	5512.6000	41.31	40.98	82.29	54.00	28.29	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical


80 dBuV/m

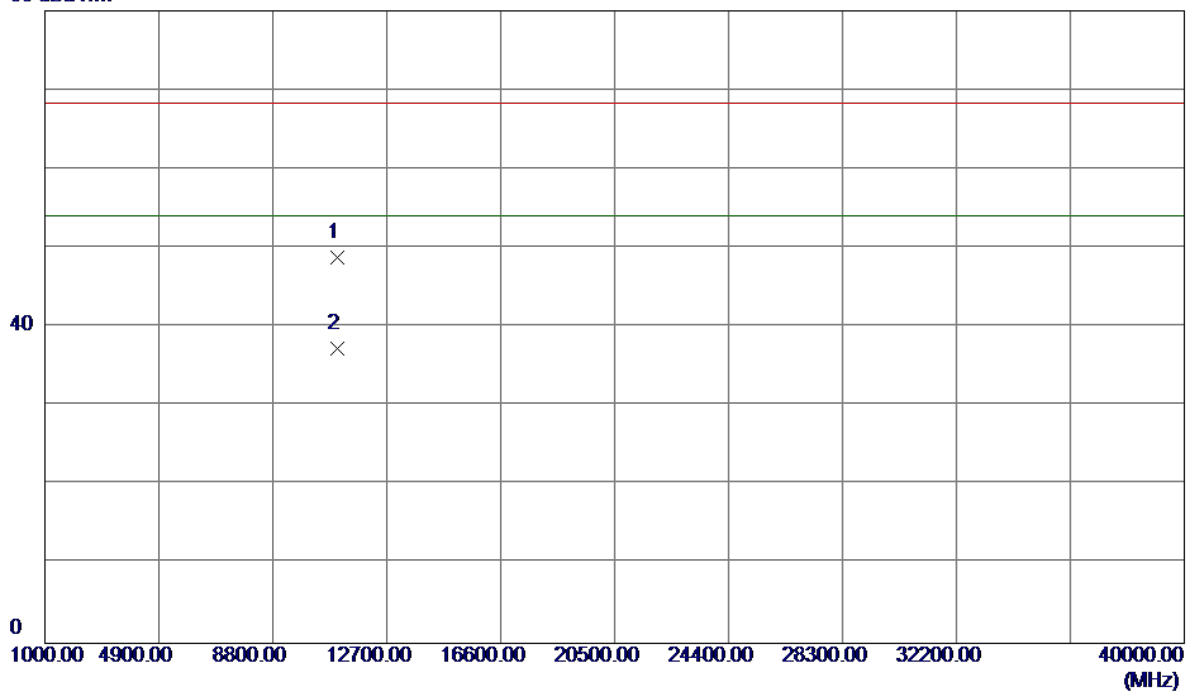

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11020.0300	32.95	15.80	48.75	68.30	-19.55	Peak	
2	11020.0300	21.54	15.80	37.34	54.00	-16.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Horizontal

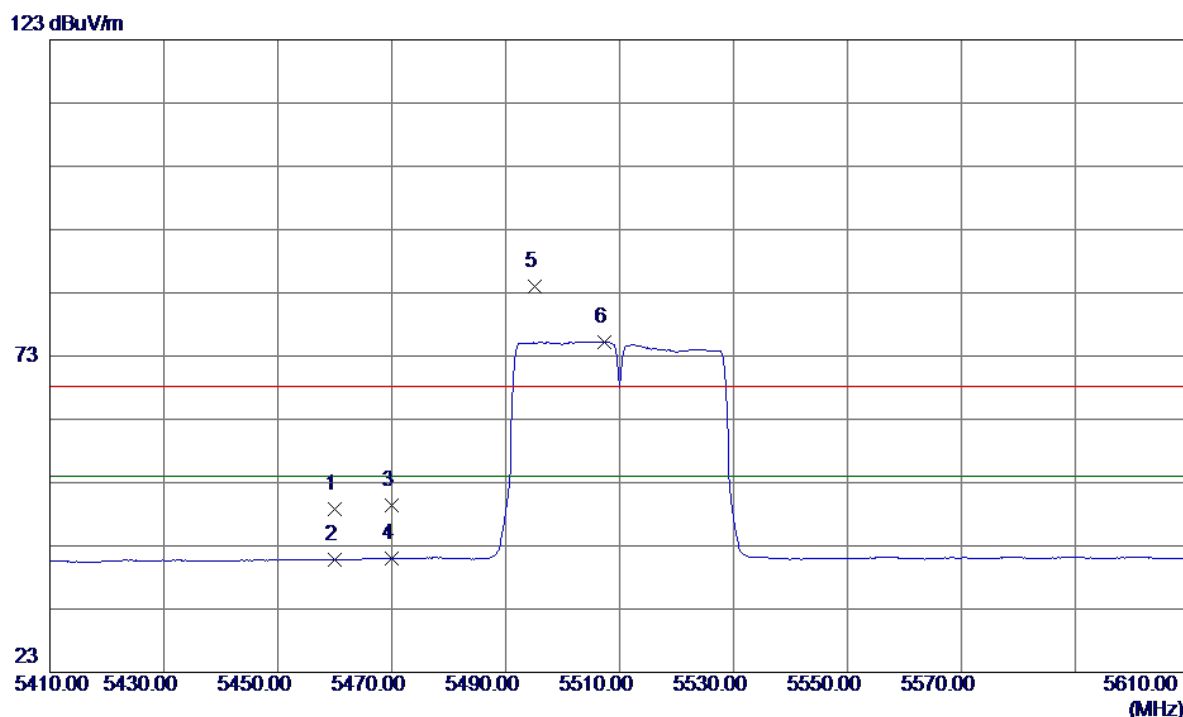

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	7.99	40.88	48.87	68.30	-19.43	Peak	
2	5460.0000	-0.16	40.88	40.72	54.00	-13.28	AVG	
3	5470.0000	8.41	40.90	49.31	68.30	-18.99	Peak	
4	5470.0000	0.08	40.90	40.98	54.00	-13.02	AVG	
5	5495.2000	43.09	40.95	84.04	68.30	15.74	Peak	no limit
6	5507.4000	34.31	40.97	75.28	54.00	21.28	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Horizontal

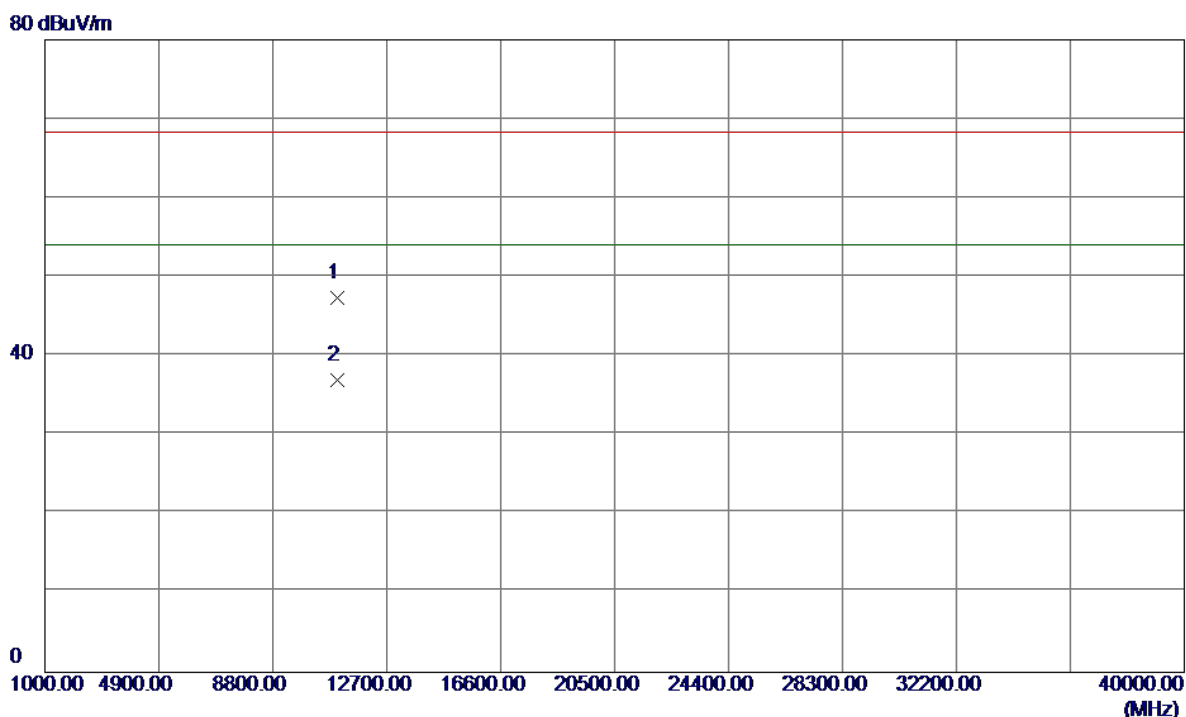

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11020.8800	31.59	15.80	47.39	68.30	-20.91	Peak	
2	11020.8800	21.14	15.80	36.94	54.00	-17.06	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical

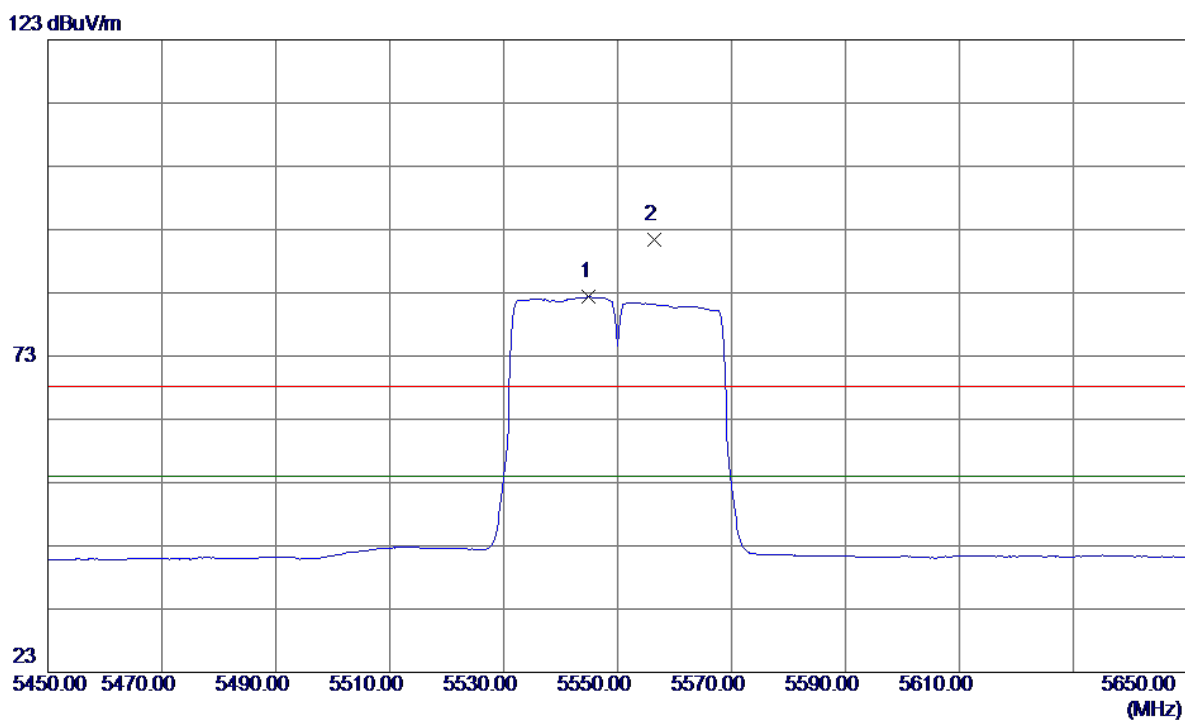

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5545.0000	41.32	41.02	82.34	54.00	28.34	AVG	no limit
2	5556.4000	50.45	41.04	91.49	68.30	23.19	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical

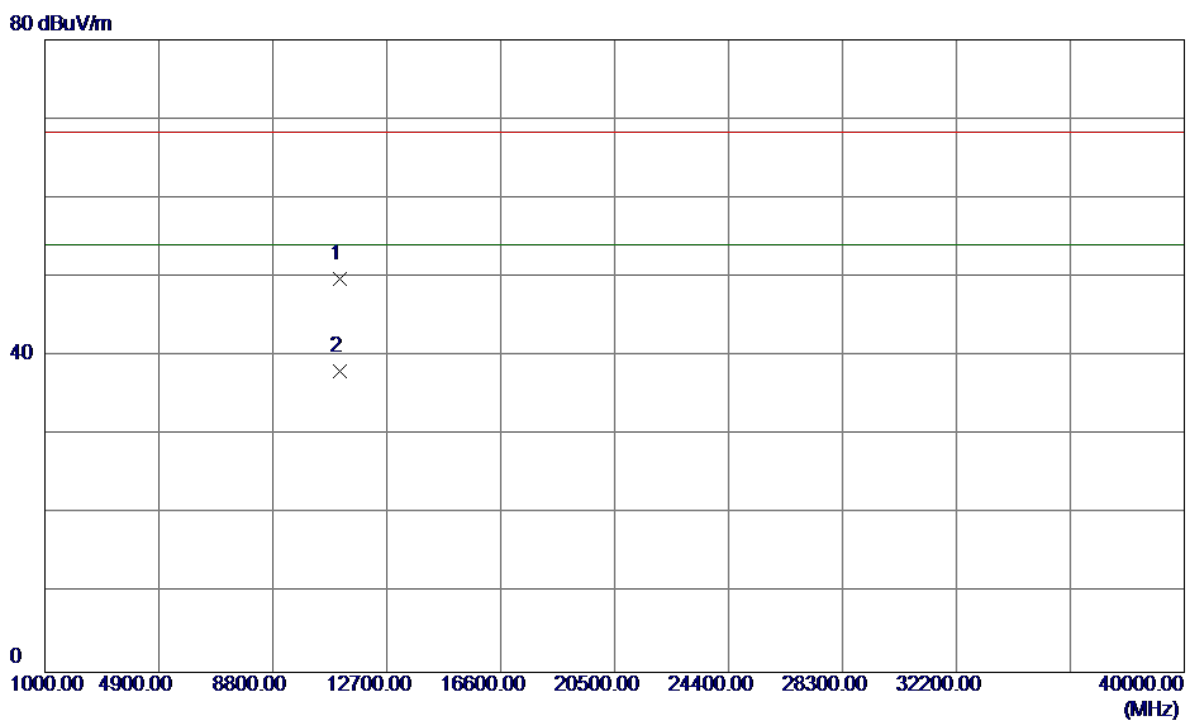

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11100.5800	33.75	15.99	49.74	68.30	-18.56	Peak	
2	11100.5800	22.14	15.99	38.13	54.00	-15.87	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

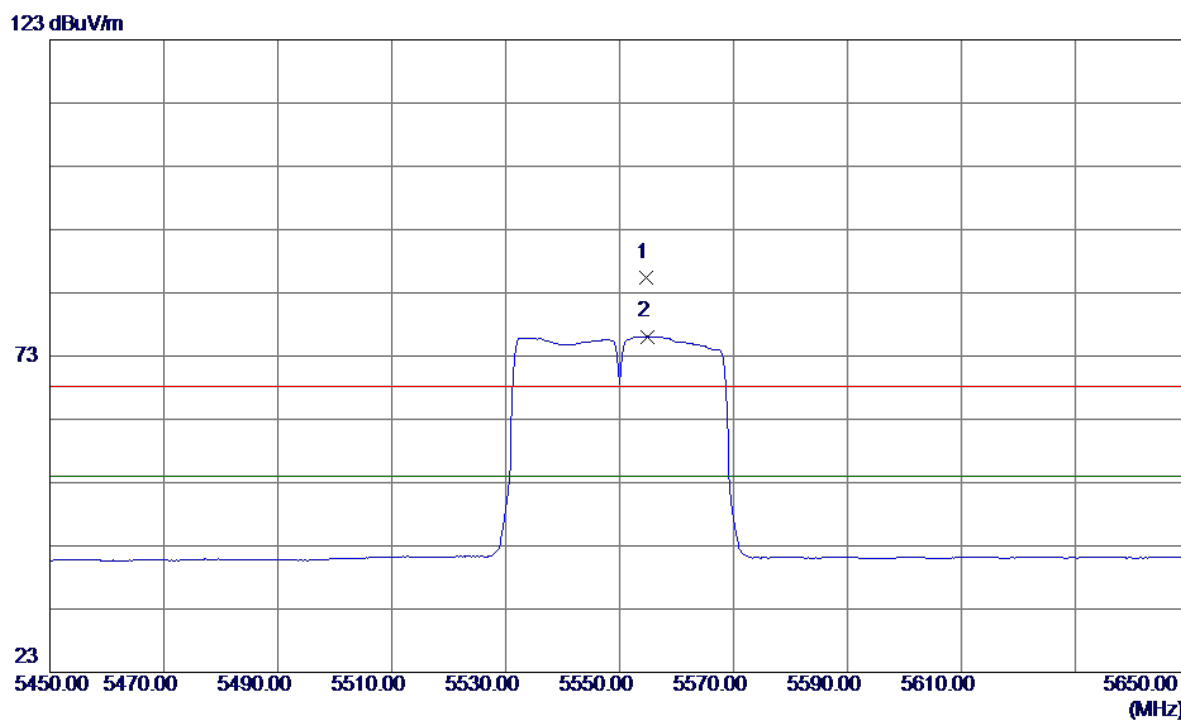

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5554.6000	44.41	41.03	85.44	68.30	17.14	Peak	no limit
2	5554.8000	35.07	41.03	76.10	54.00	22.10	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

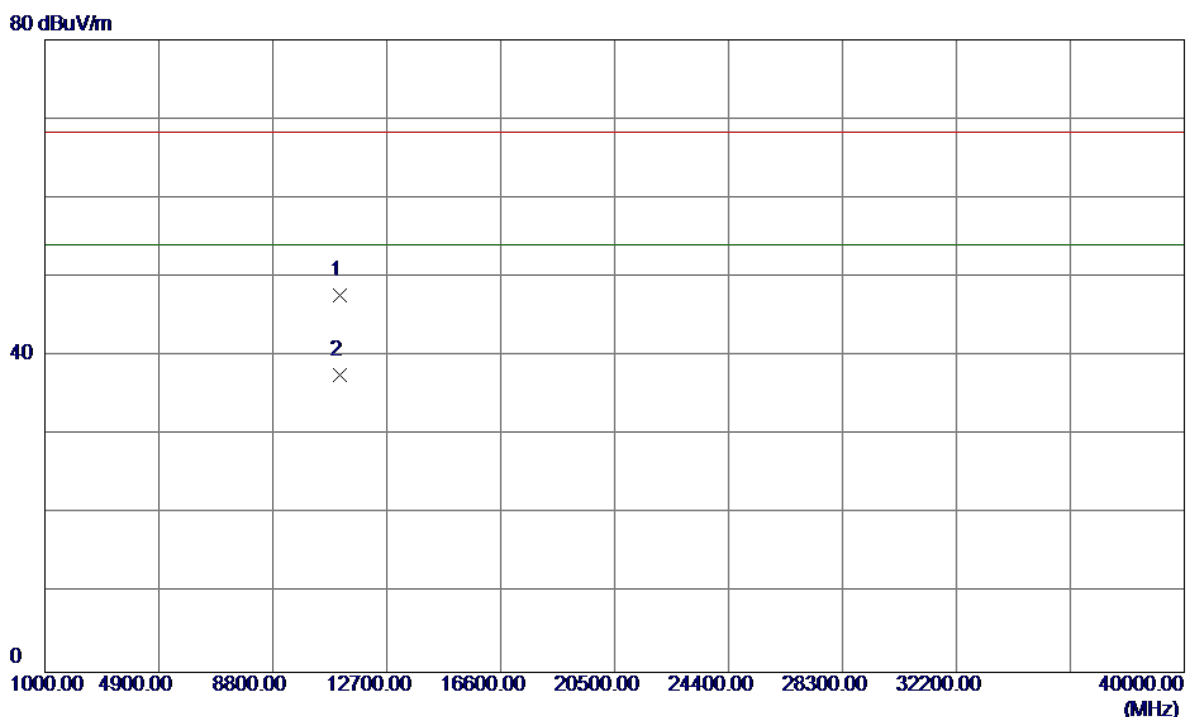

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11100.9800	31.65	15.99	47.64	68.30	-20.66	Peak	
2	11100.9800	21.55	15.99	37.54	54.00	-16.46	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

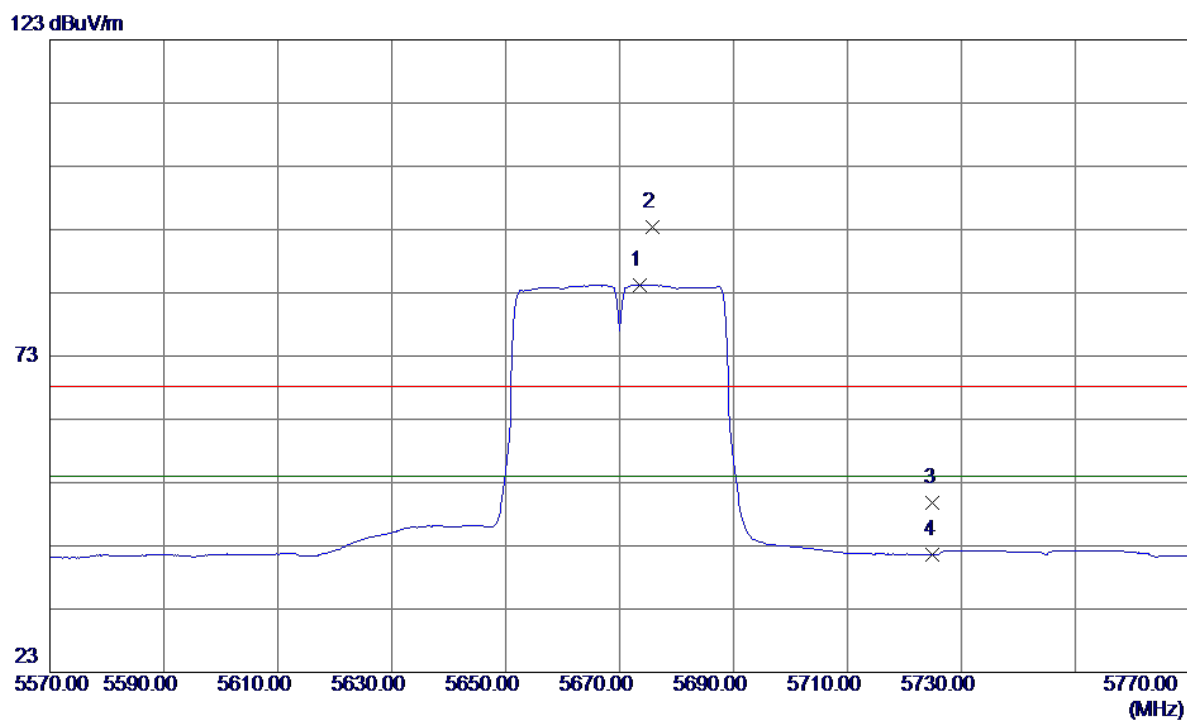


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5673.6000	43.03	41.20	84.23	54.00	30.23	AVG	no limit
2	5675.8000	52.21	41.20	93.41	68.30	25.11	Peak	no limit
3	5725.0000	8.52	41.27	49.79	68.30	-18.51	Peak	
4	5725.0000	0.38	41.27	41.65	54.00	-12.35	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical


80 dBuV/m

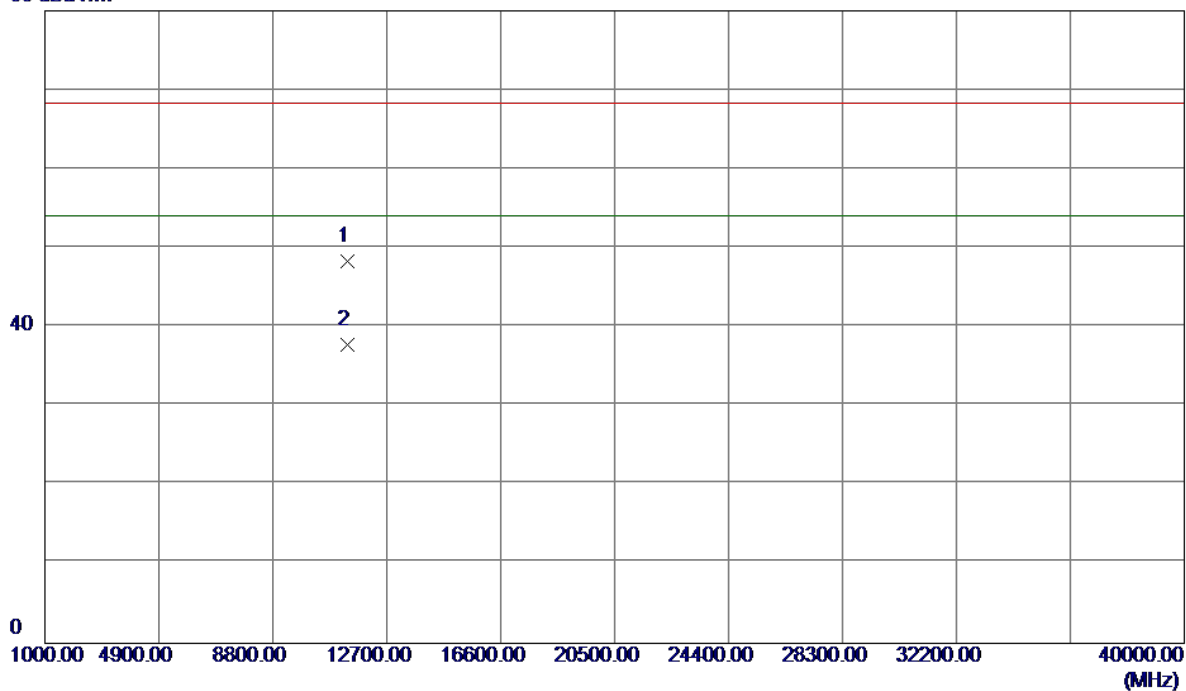

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11341.2300	31.79	16.56	48.35	68.30	-19.95	Peak	
2	11341.2300	21.26	16.56	37.82	54.00	-16.18	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal

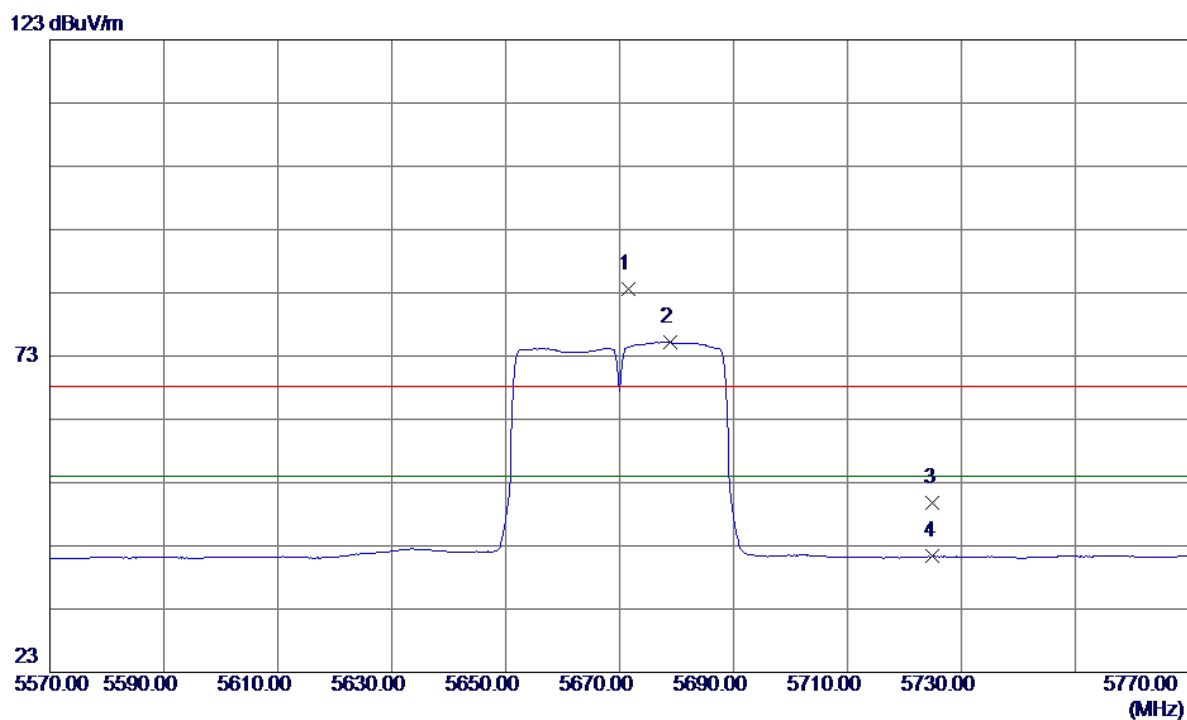


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5671.6000	42.37	41.19	83.56	68.30	15.26	Peak	no limit
2	5678.8000	34.03	41.20	75.23	54.00	21.23	AVG	no limit
3	5725.0000	8.47	41.27	49.74	68.30	-18.56	Peak	
4	5725.0000	0.05	41.27	41.32	54.00	-12.68	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal


80 dBuV/m

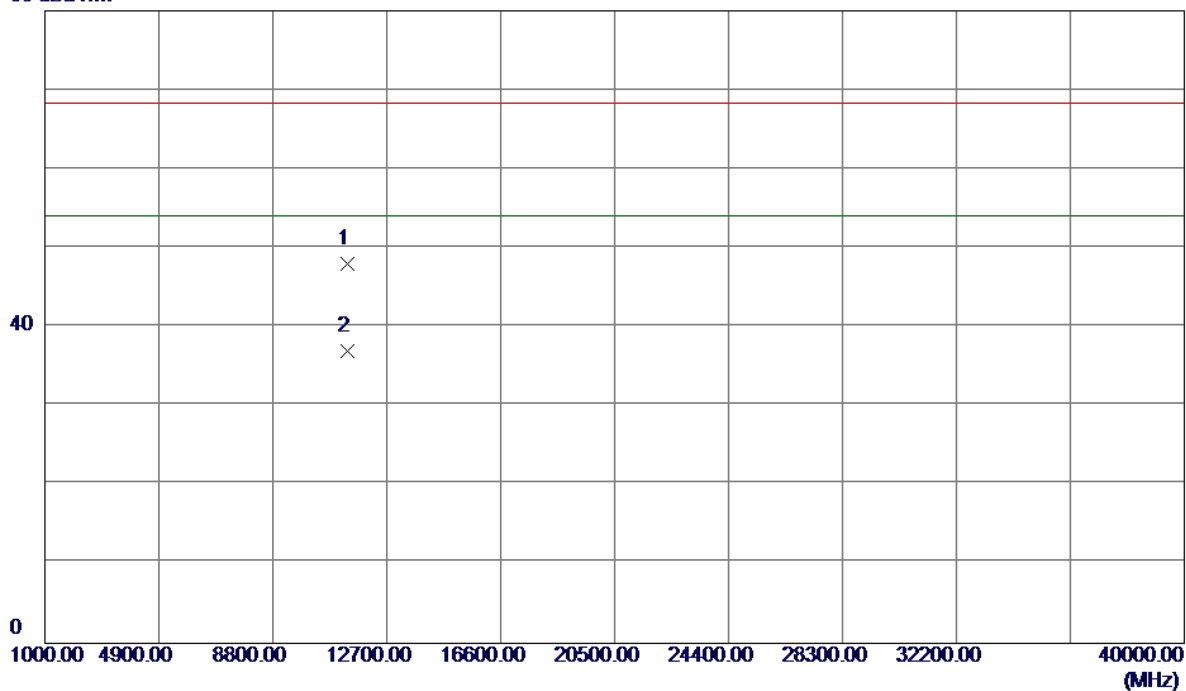

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11340.5199	31.47	16.56	48.03	68.30	-20.27	Peak	
2	11340.5199	20.45	16.56	37.01	54.00	-16.99	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

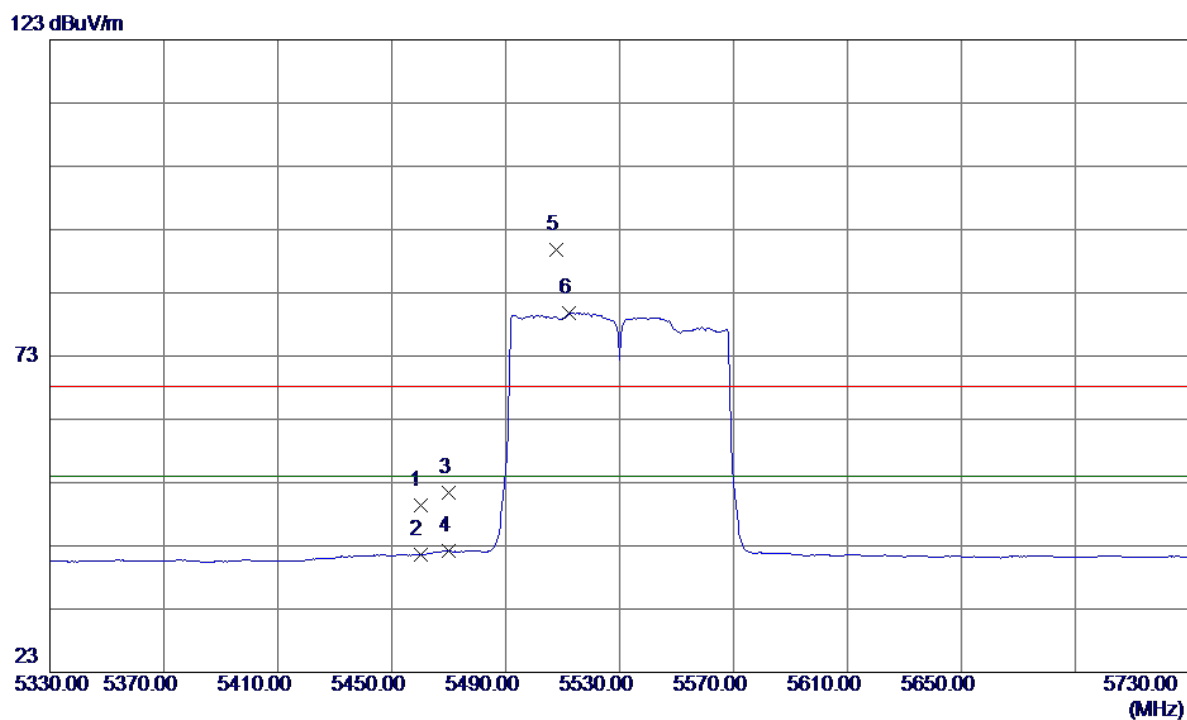


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	8.57	40.88	49.45	68.30	-18.85	Peak	
2	5460.0000	0.68	40.88	41.56	54.00	-12.44	AVG	
3	5470.0000	10.43	40.90	51.33	68.30	-16.97	Peak	
4	5470.0000	1.22	40.90	42.12	54.00	-11.88	AVG	
5	5507.6000	48.76	40.97	89.73	68.30	21.43	Peak	no limit
6	5512.4000	38.80	40.98	79.78	54.00	25.78	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical


80 dBuV/m

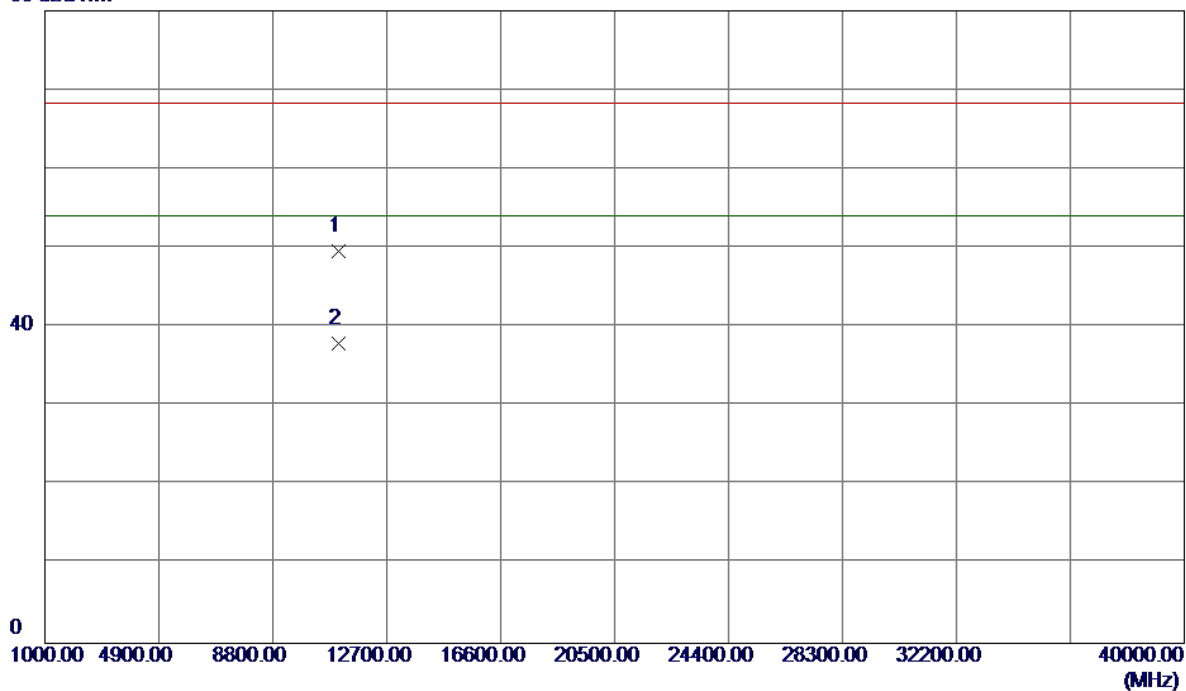

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11062.3300	33.75	15.90	49.65	68.30	-18.65	Peak	
2	11062.3300	22.08	15.90	37.98	54.00	-16.02	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal

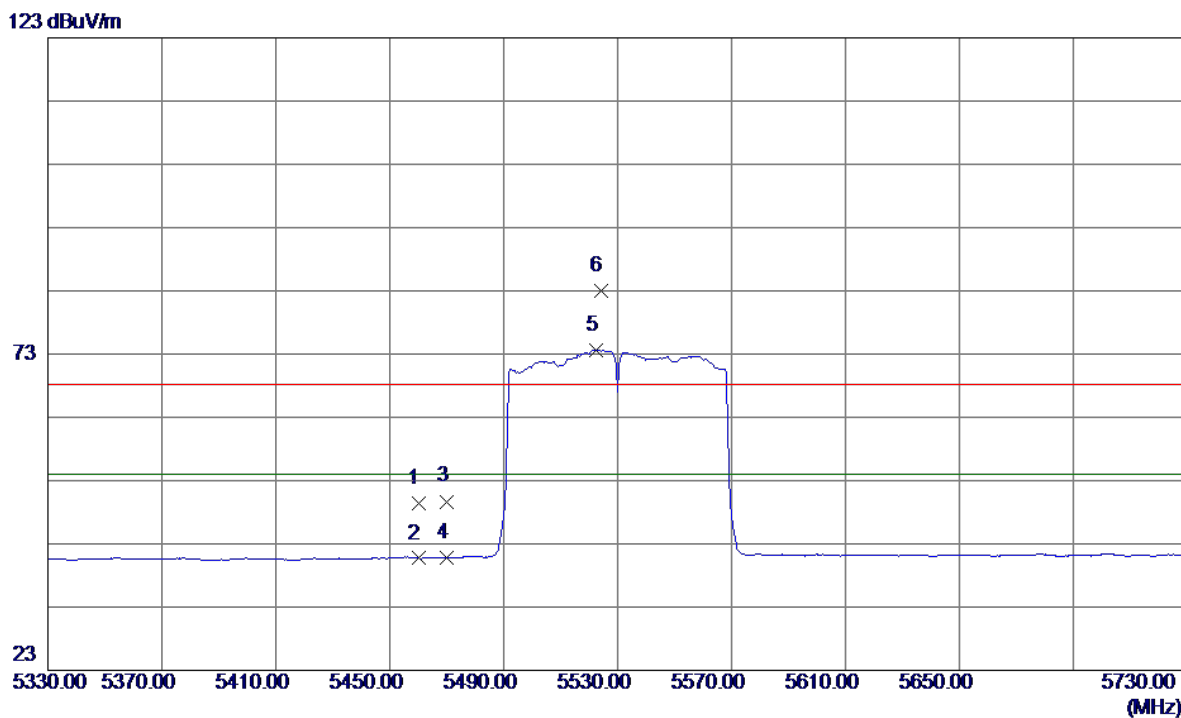


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	8.45	40.88	49.33	68.30	-18.97	Peak	
2	5460.0000	-0.18	40.88	40.70	54.00	-13.30	AVG	
3	5470.0000	8.80	40.90	49.70	68.30	-18.60	Peak	
4	5470.0000	-0.12	40.90	40.78	54.00	-13.22	AVG	
5	5522.4000	32.65	40.99	73.64	54.00	19.64	AVG	no limit
6	5524.0000	42.09	40.99	83.08	68.30	14.78	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal


80 dBuV/m

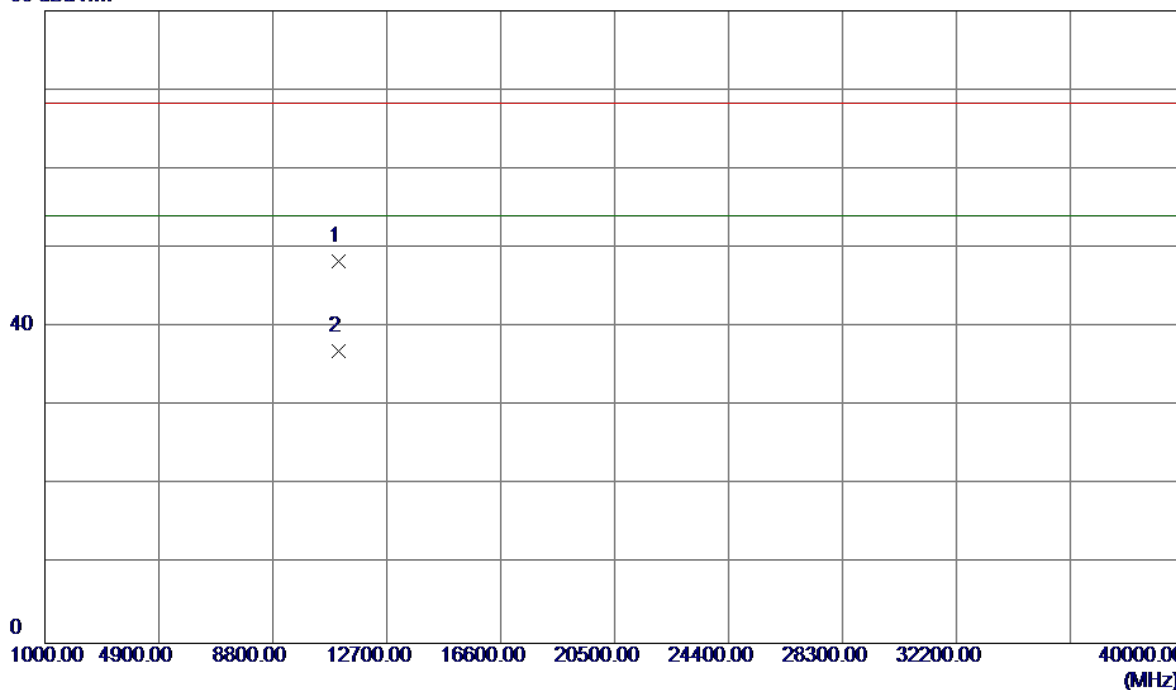

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11059.8700	32.38	15.89	48.27	68.30	-20.03	Peak	
2	11059.8700	21.14	15.89	37.03	54.00	-16.97	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

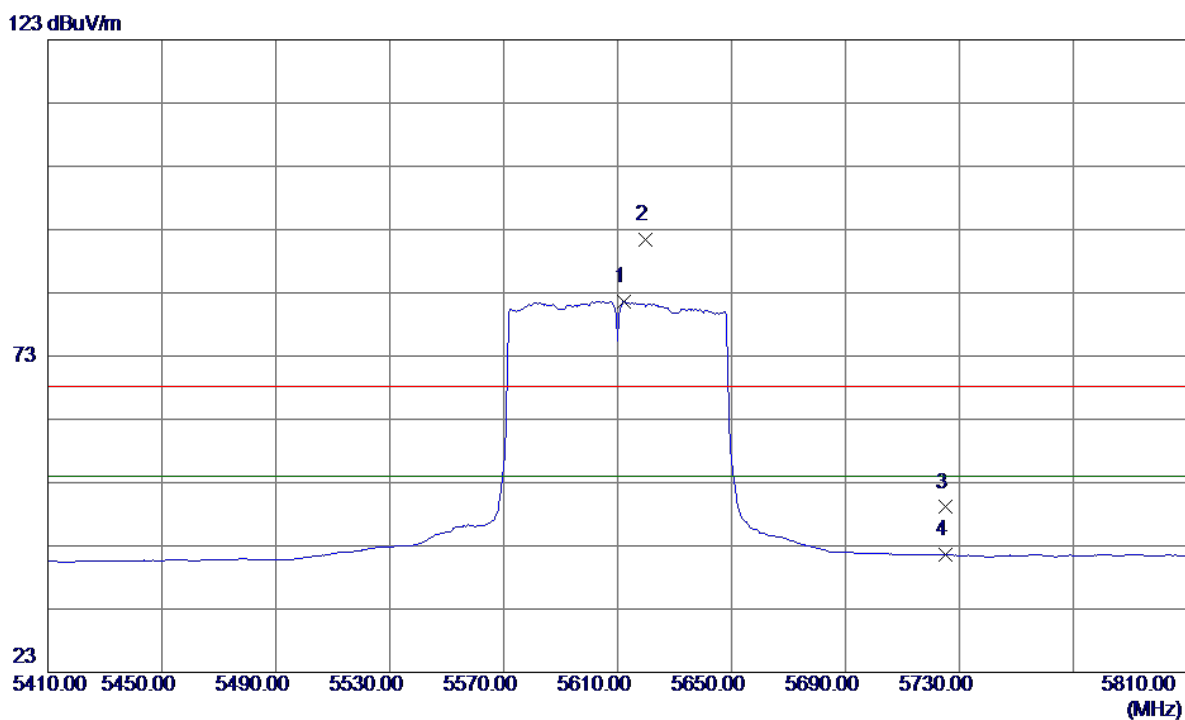


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5612.4000	40.50	41.11	81.61	54.00	27.61	AVG	no limit
2	5619.6000	50.23	41.12	91.35	68.30	23.05	Peak	no limit
3	5725.0000	7.83	41.27	49.10	68.30	-19.20	Peak	
4	5725.0000	0.32	41.27	41.59	54.00	-12.41	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical


80 dBuV/m

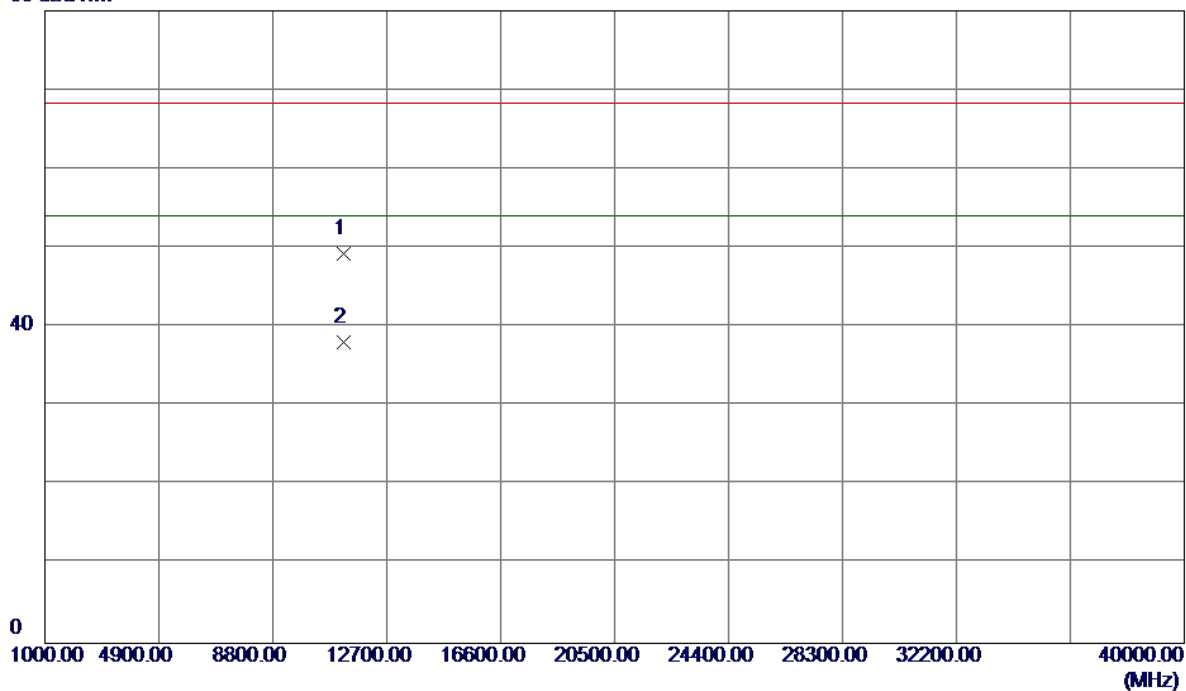

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11221.2800	33.01	16.27	49.28	68.30	-19.02	Peak	
2	11221.2800	21.78	16.27	38.05	54.00	-15.95	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Horizontal

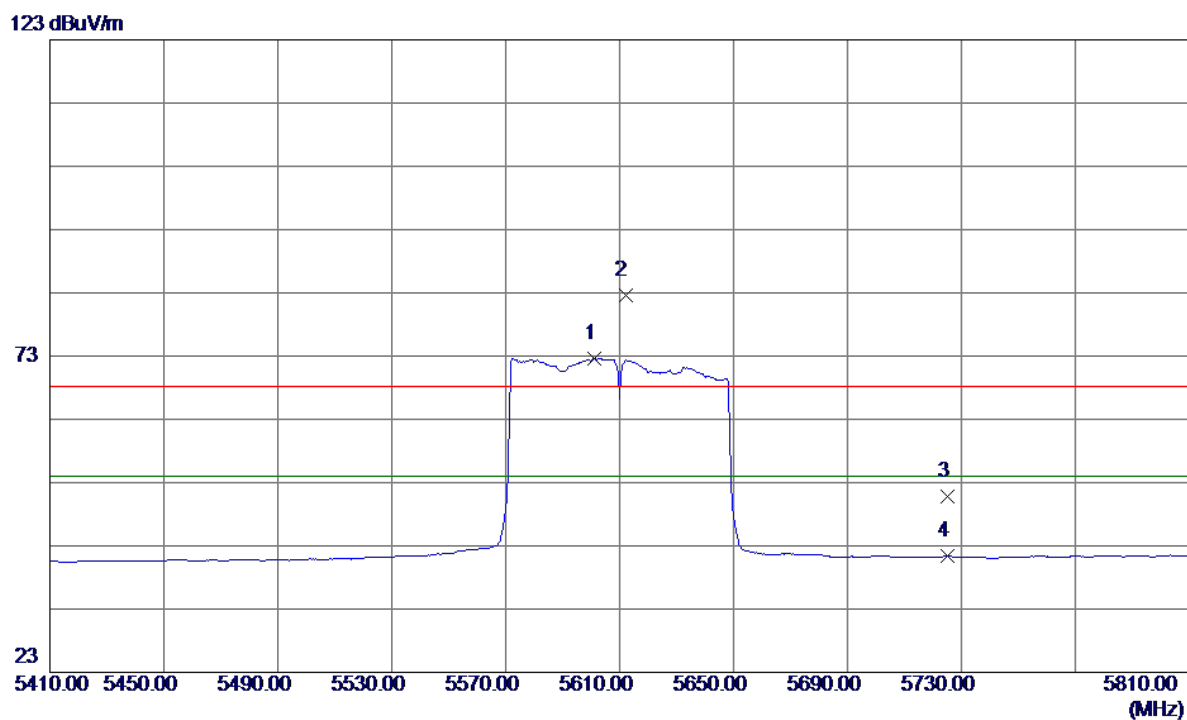

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5601.2000	31.51	41.10	72.61	54.00	18.61	AVG	no limit
2	5612.0000	41.51	41.11	82.62	68.30	14.32	Peak	no limit
3	5725.0000	9.53	41.27	50.80	68.30	-17.50	Peak	
4	5725.0000	0.08	41.27	41.35	54.00	-12.65	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal

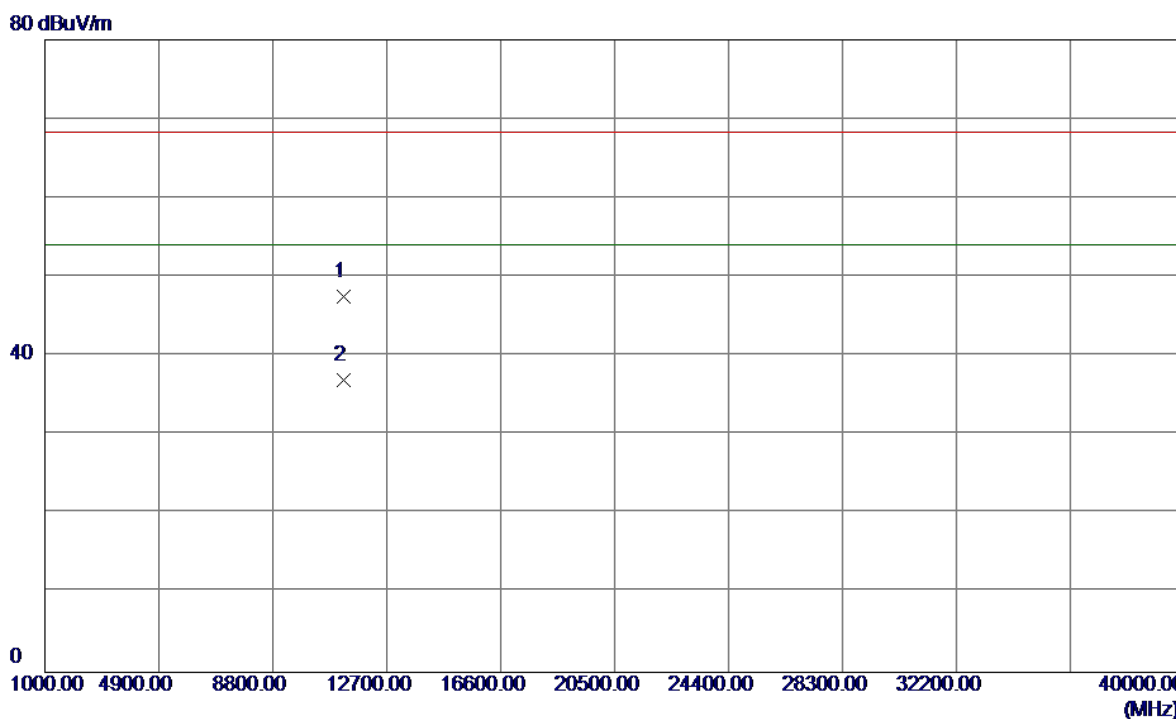


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11220.8200	31.28	16.27	47.55	68.30	-20.75	Peak	
2	11220.8200	20.75	16.27	37.02	54.00	-16.98	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical

128 dBuV/m

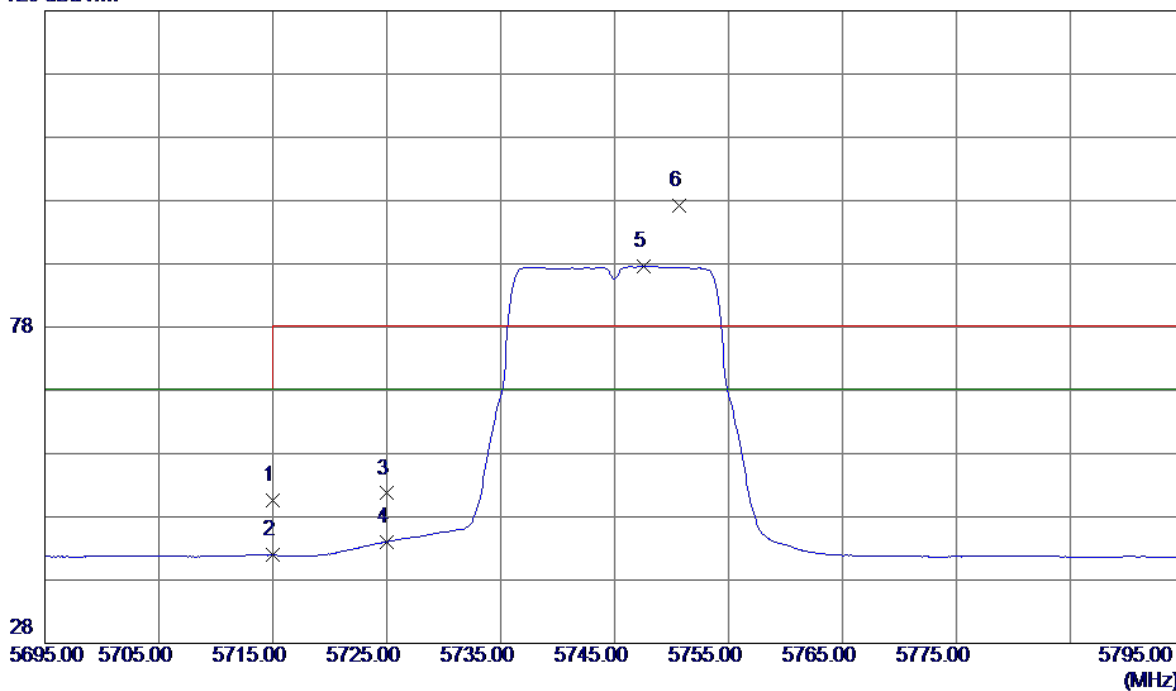


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	9.41	41.25	50.66	68.30	-17.64	Peak	
2	5715.0000	0.70	41.25	41.95	68.30	-26.35	AVG	
3	5725.0000	10.43	41.27	51.70	78.30	-26.60	Peak	
4	5725.0000	2.76	41.27	44.03	68.30	-24.27	AVG	
5	5747.6000	46.28	41.30	87.58	68.30	19.28	AVG	no limit
6	5750.7000	55.81	41.30	97.11	78.30	18.81	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical


80 dBuV/m

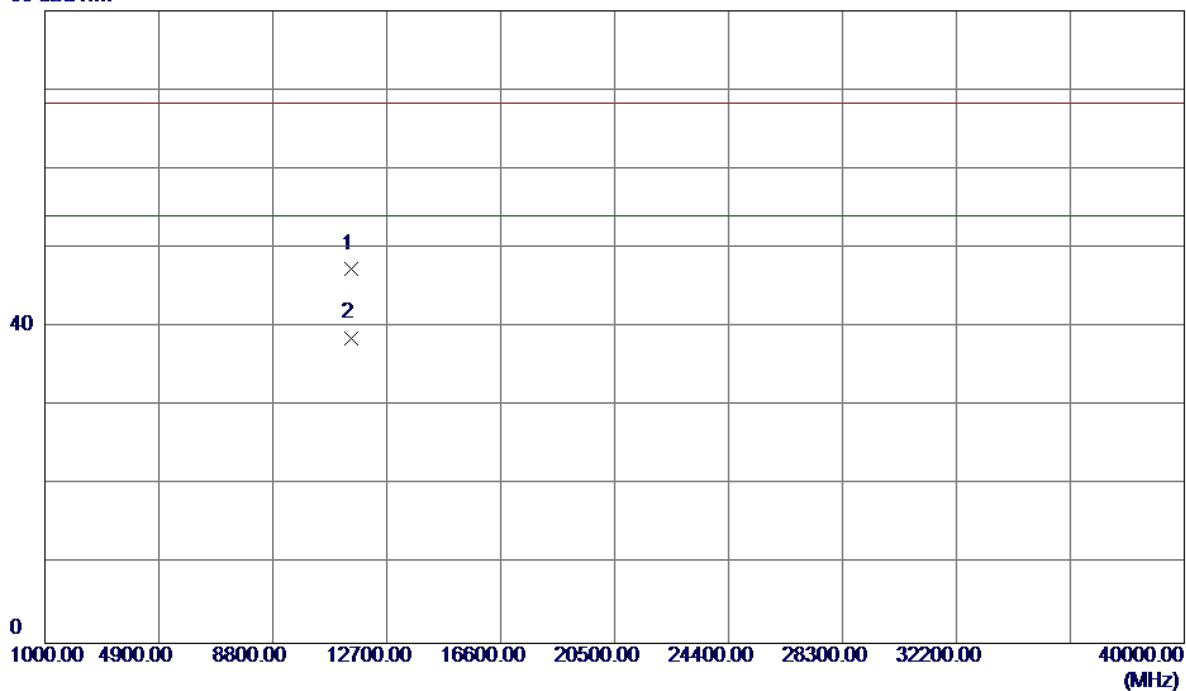

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.7100	30.41	16.91	47.32	68.30	-20.98	Peak	
2	11490.7100	21.73	16.91	38.64	54.00	-15.36	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

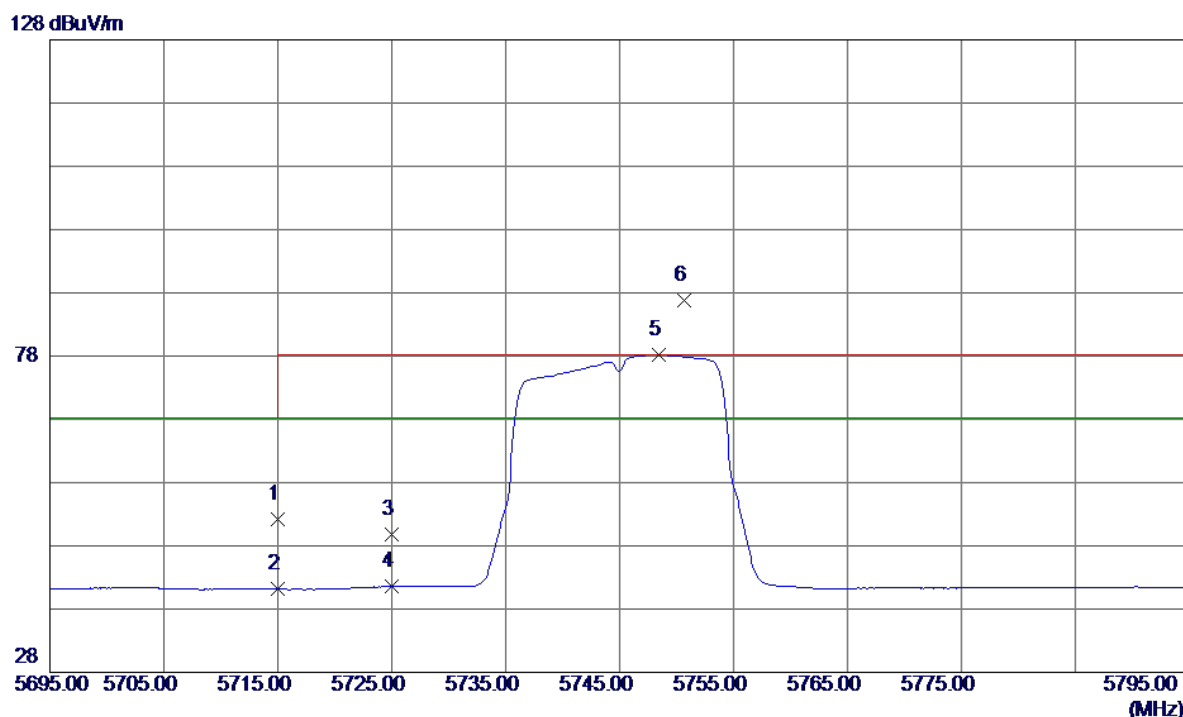

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	10.86	41.25	52.11	68.30	-16.19	Peak	
2	5715.0000	-0.06	41.25	41.19	68.30	-27.11	AVG	
3	5725.0000	8.44	41.27	49.71	78.30	-28.59	Peak	
4	5725.0000	0.30	41.27	41.57	68.30	-26.73	AVG	
5	5748.4000	36.89	41.30	78.19	68.30	9.89	AVG	no limit
6	5750.7000	45.45	41.30	86.75	78.30	8.45	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

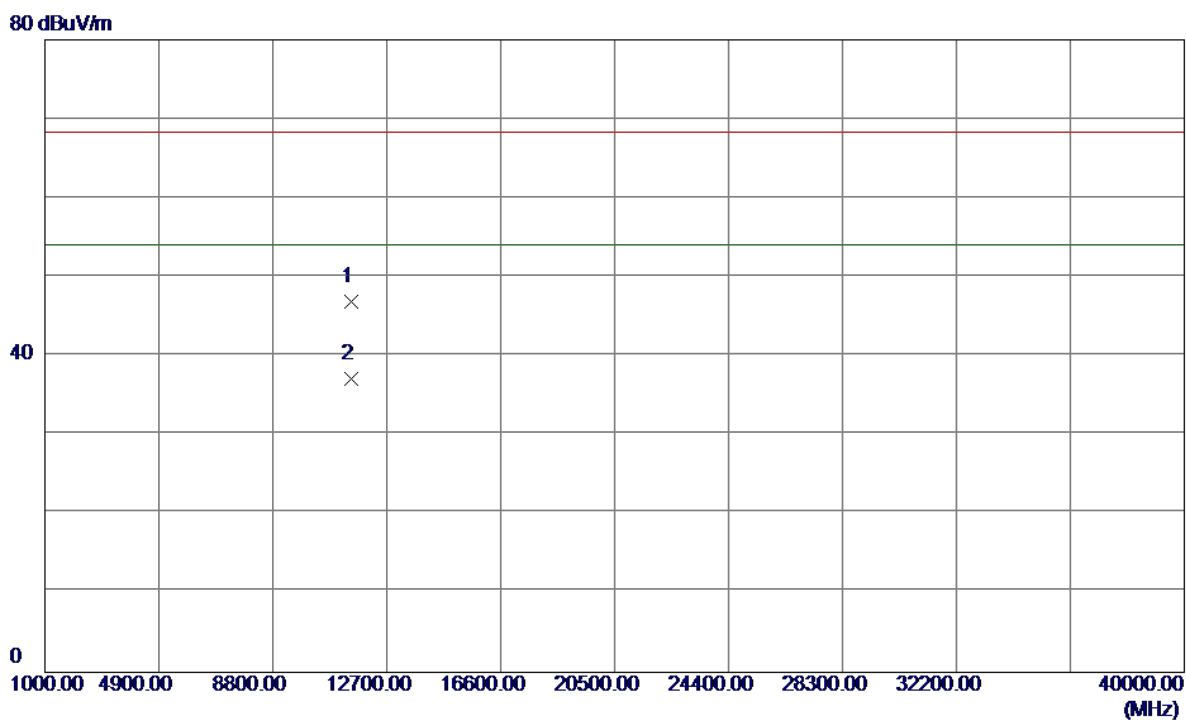

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.3400	29.92	16.91	46.83	68.30	-21.47	Peak	
2	11490.3400	20.21	16.91	37.12	54.00	-16.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical

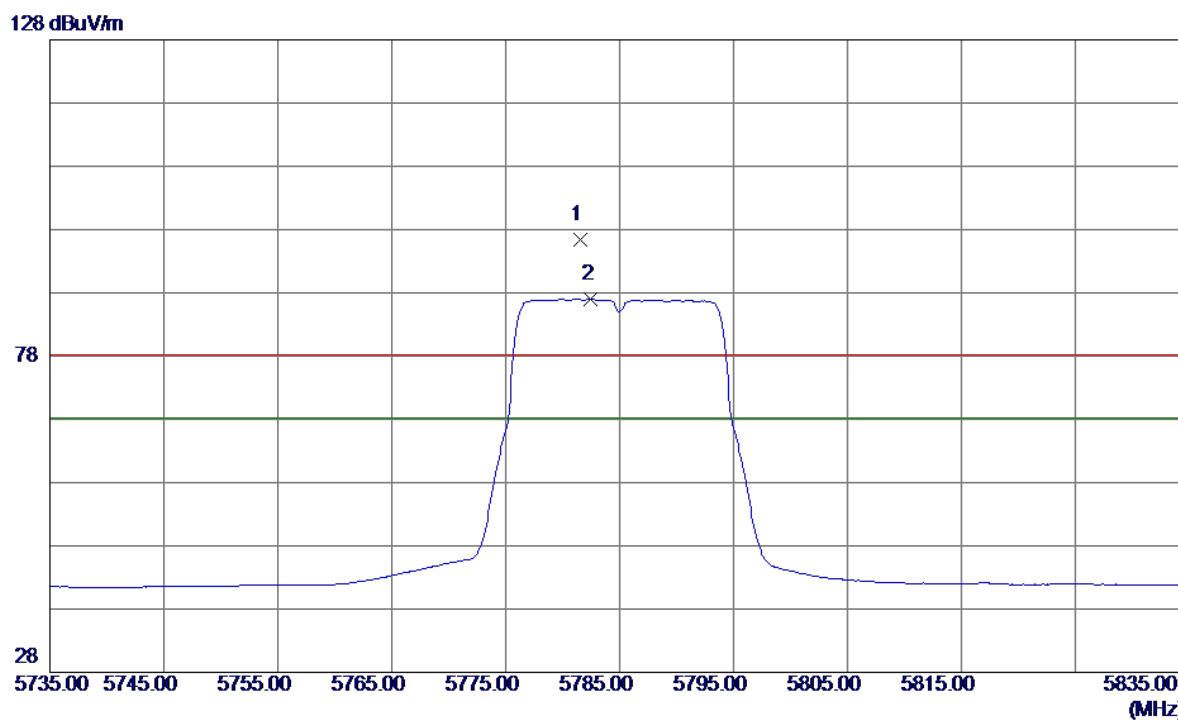


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5781.6000	55.09	41.34	96.43	78.30	18.13	Peak	no limit
2	5782.5000	45.62	41.34	86.96	68.30	18.66	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical


80 dBuV/m

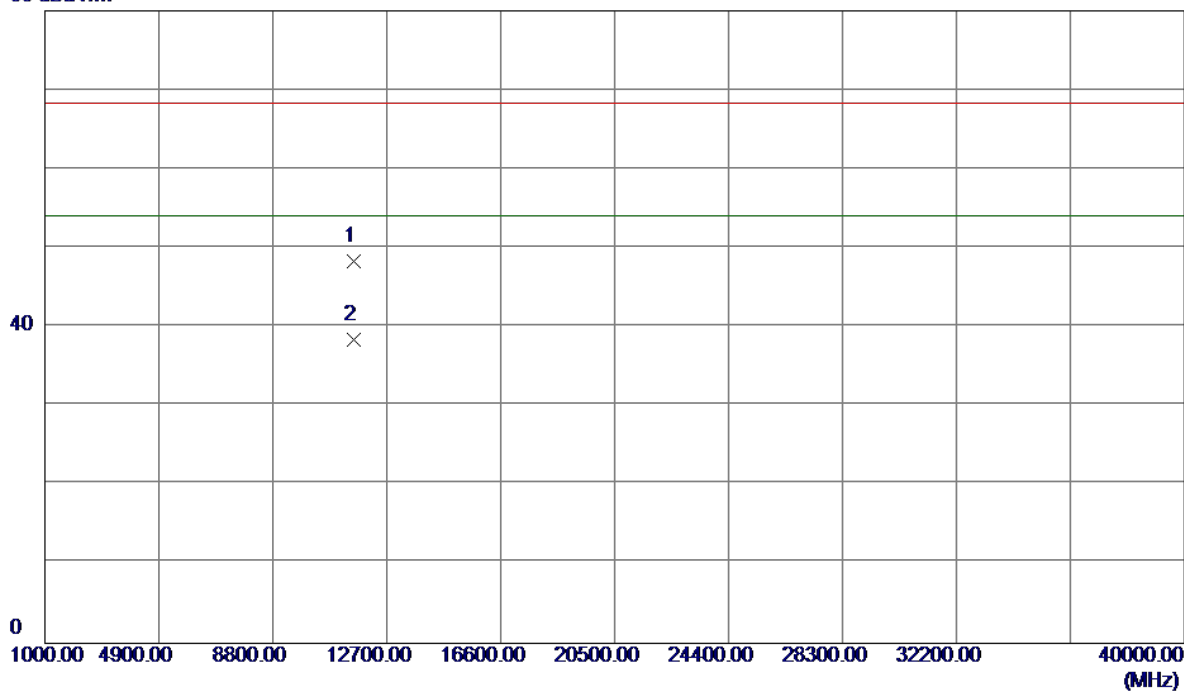

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11570.0100	31.32	17.05	48.37	68.30	-19.93	Peak	
2	11570.0100	21.41	17.05	38.46	54.00	-15.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal

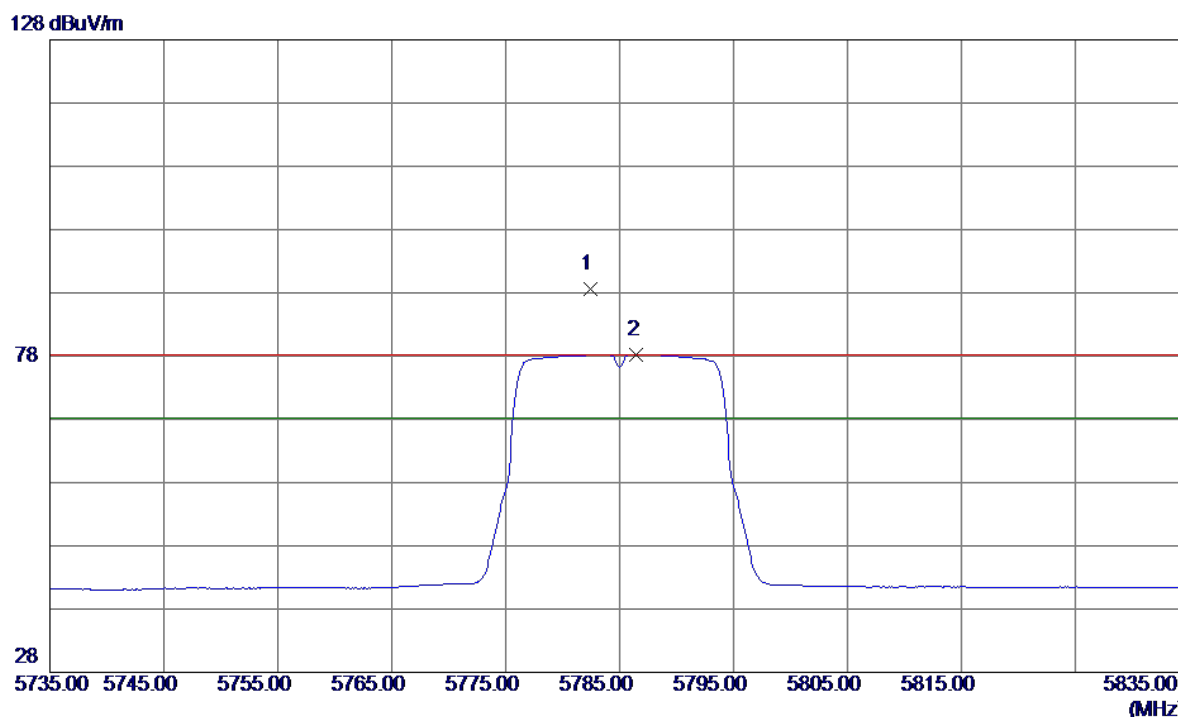


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5782.4000	47.33	41.34	88.67	78.30	10.37	Peak	no limit
2	5786.5000	36.91	41.35	78.26	68.30	9.96	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal


80 dBuV/m

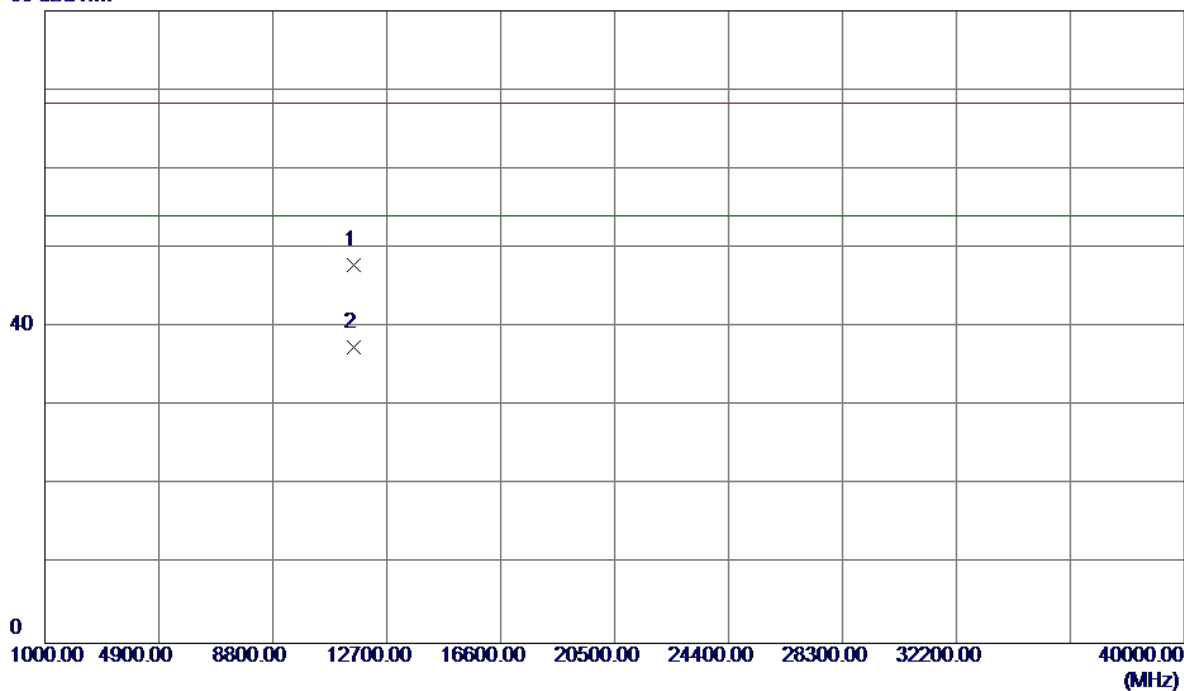

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11570.1700	30.80	17.05	47.85	68.30	-20.45	Peak	
2	11570.1700	20.41	17.05	37.46	54.00	-16.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical

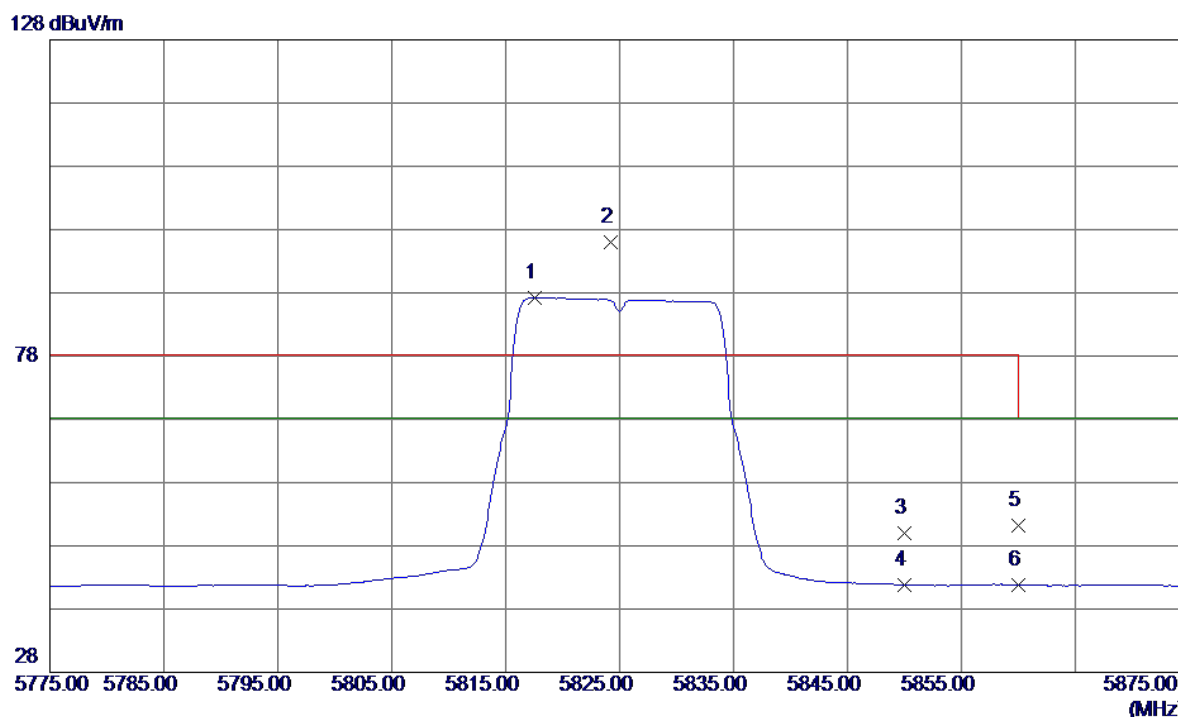


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5817.6000	45.87	41.39	87.26	68.30	18.96	AVG	no limit
2	5824.2000	54.56	41.40	95.96	78.30	17.66	Peak	no limit
3	5850.0000	8.64	41.44	50.08	78.30	-28.22	Peak	
4	5850.0000	0.44	41.44	41.88	68.30	-26.42	AVG	
5	5860.0000	9.71	41.45	51.16	78.30	-27.14	Peak	
6	5860.0000	0.40	41.45	41.85	68.30	-26.45	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical


80 dBuV/m

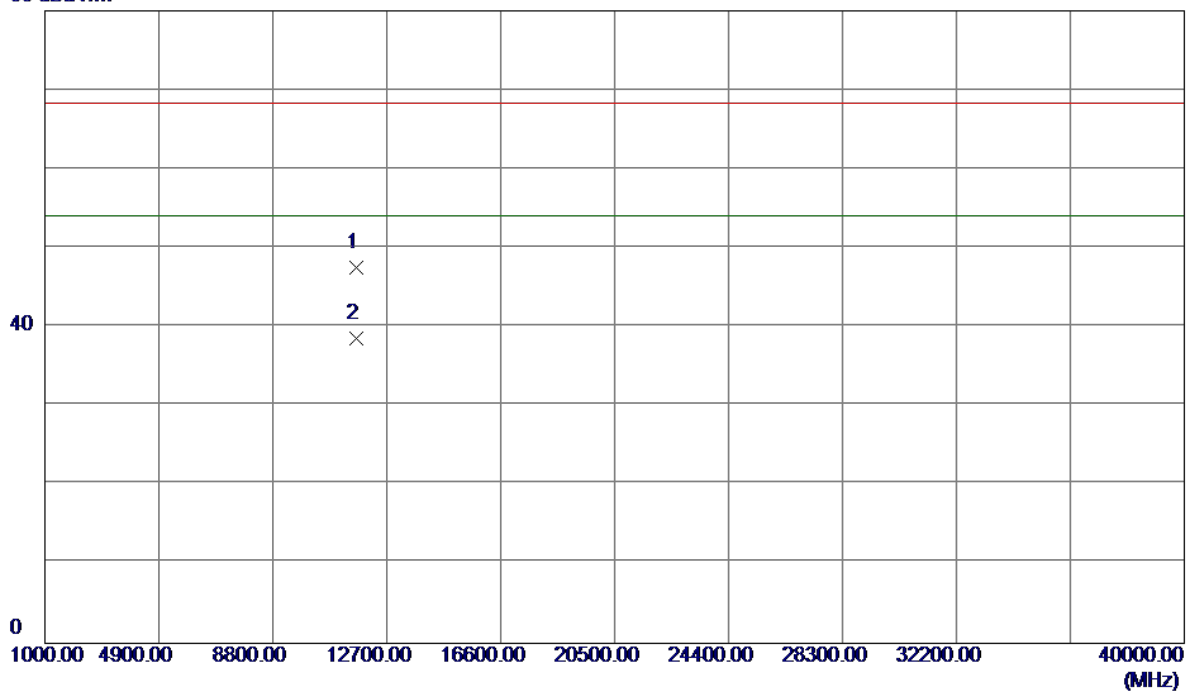

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.1300	30.38	17.17	47.55	68.30	-20.75	Peak	
2	11650.1300	21.44	17.17	38.61	54.00	-15.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

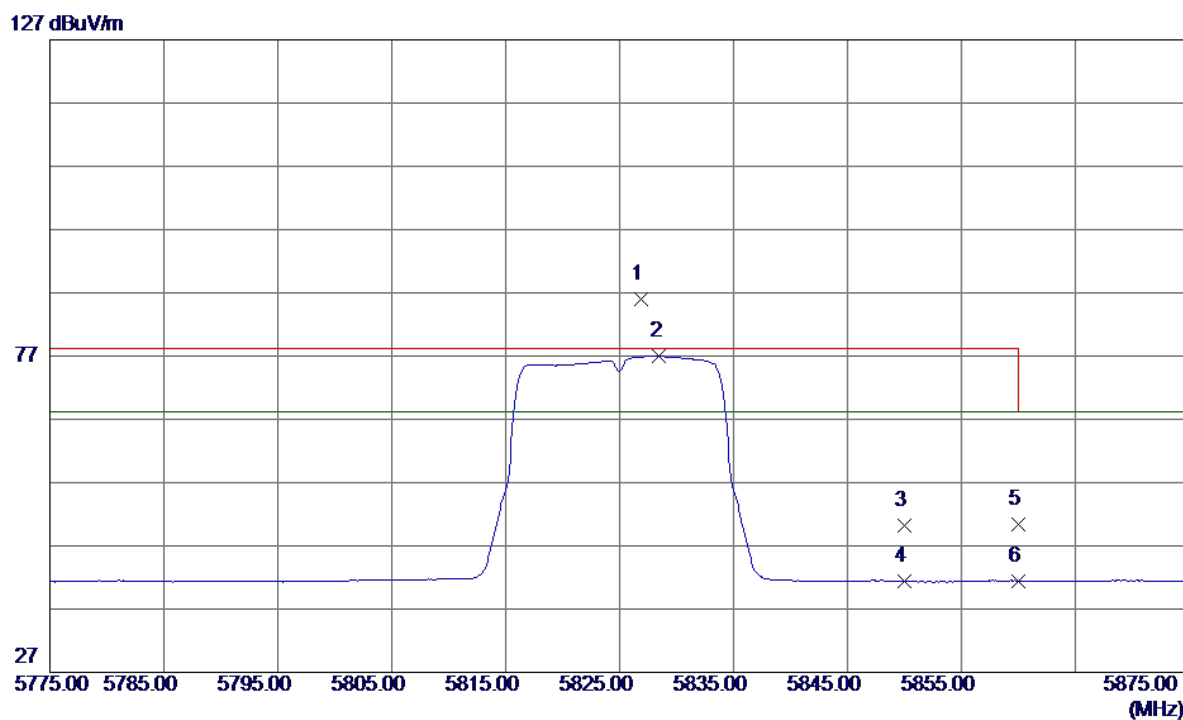

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5826.9000	44.68	41.40	86.08	78.30	7.78	Peak	no limit
2	5828.5000	35.55	41.41	76.96	68.30	8.66	AVG	no limit
3	5850.0000	8.72	41.44	50.16	78.30	-28.14	Peak	
4	5850.0000	-0.09	41.44	41.35	68.30	-26.95	AVG	
5	5860.0000	8.89	41.45	50.34	78.30	-27.96	Peak	
6	5860.0000	0.02	41.45	41.47	68.30	-26.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

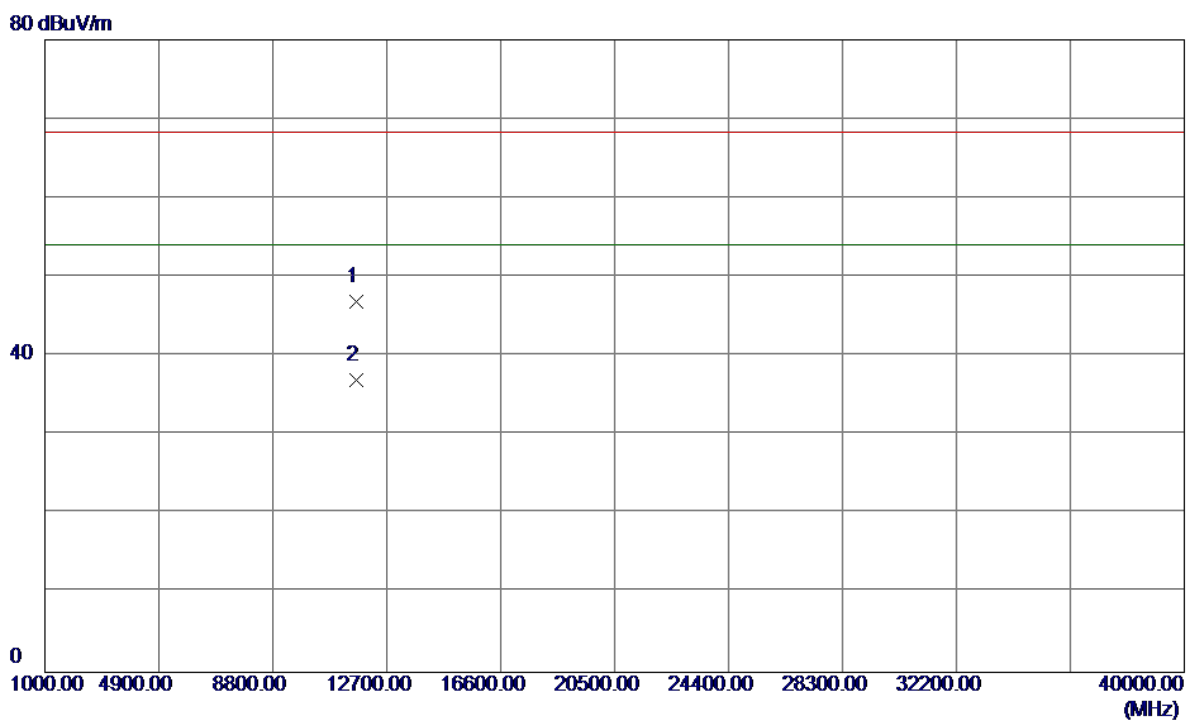

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.3400	29.71	17.17	46.88	68.30	-21.42	Peak	
2	11650.3400	19.85	17.17	37.02	54.00	-16.98	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical

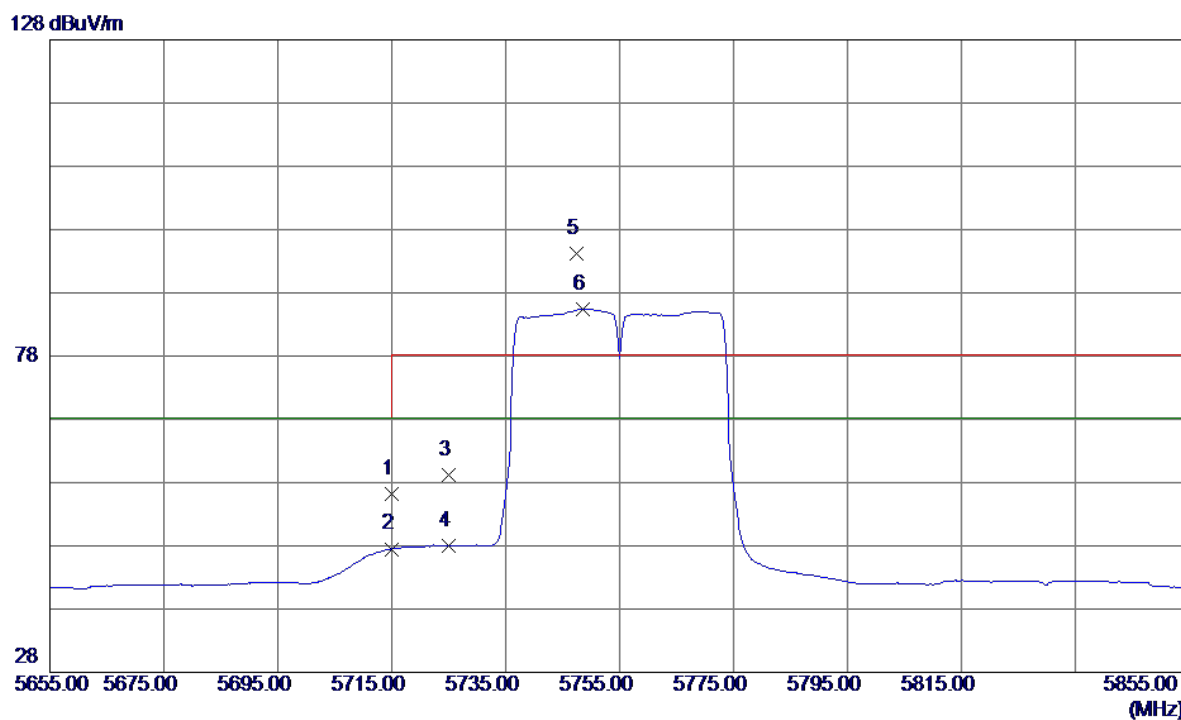


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	14.97	41.25	56.22	68.30	-12.08	Peak	
2	5715.0000	6.25	41.25	47.50	68.30	-20.80	AVG	
3	5725.0000	17.95	41.27	59.22	78.30	-19.08	Peak	
4	5725.0000	6.75	41.27	48.02	68.30	-20.28	AVG	
5	5747.4000	52.85	41.30	94.15	78.30	15.85	Peak	no limit
6	5748.6000	44.15	41.30	85.45	68.30	17.15	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical


80 dBuV/m

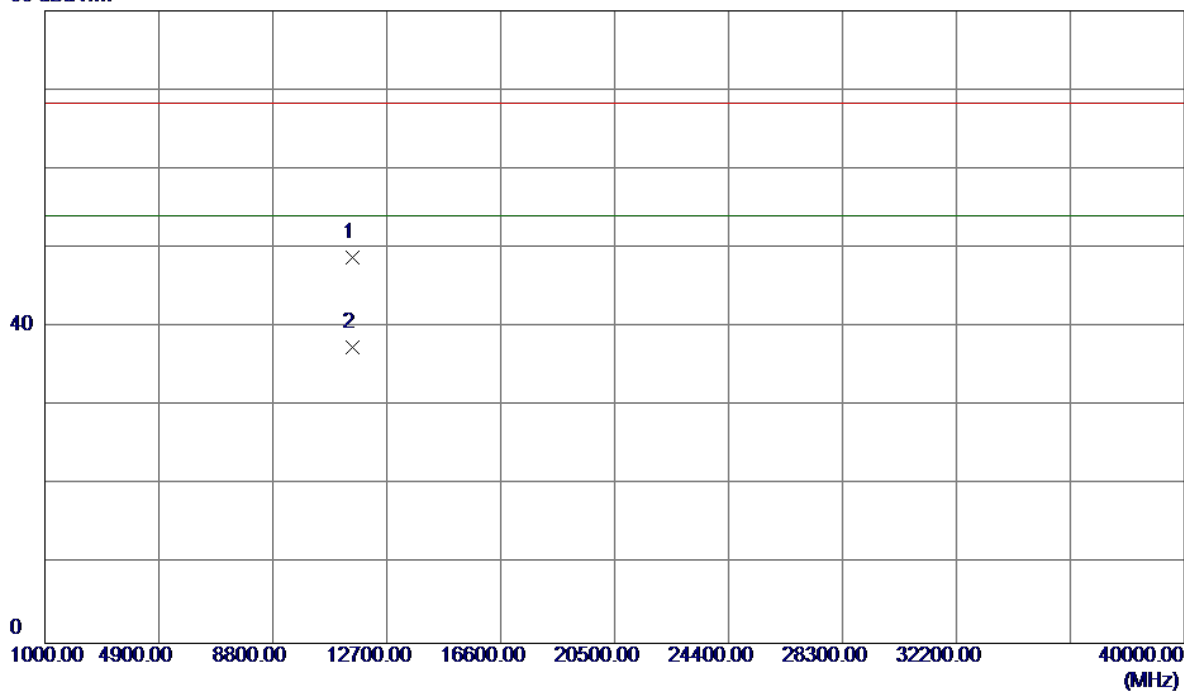

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11510.8800	31.81	16.95	48.76	68.30	-19.54	Peak	
2	11510.8800	20.44	16.95	37.39	54.00	-16.61	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Horizontal

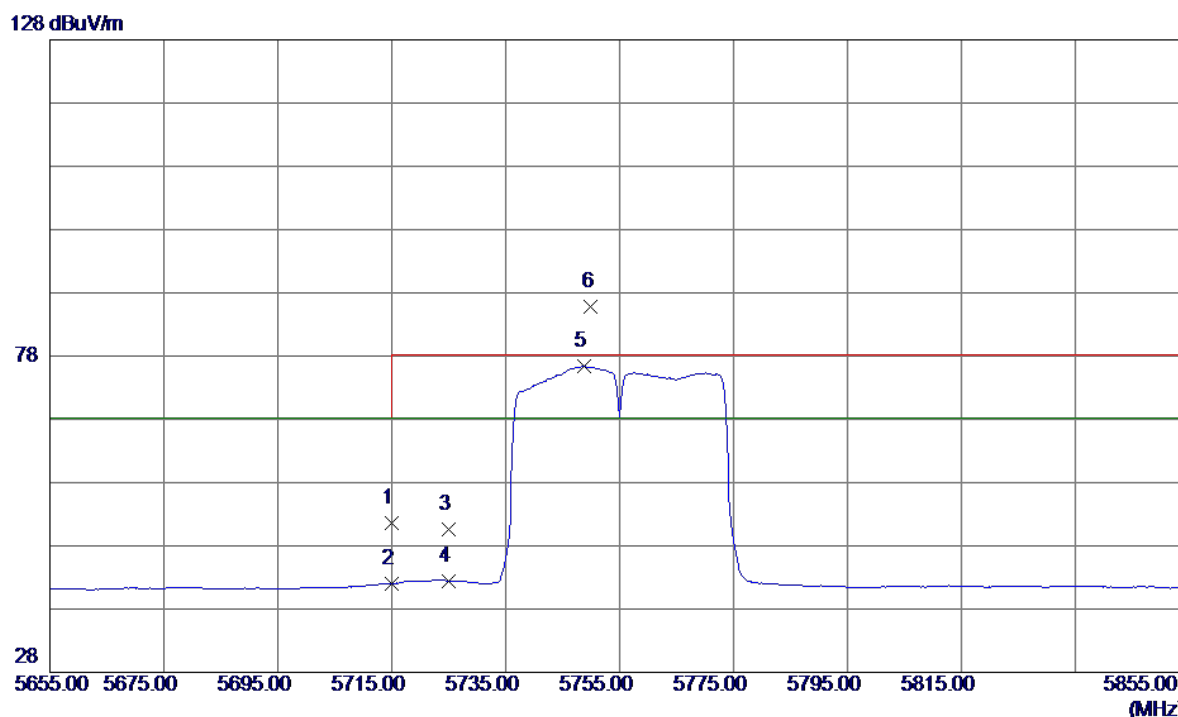


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	10.28	41.25	51.53	68.30	-16.77	Peak	
2	5715.0000	0.80	41.25	42.05	68.30	-26.25	AVG	
3	5725.0000	9.30	41.27	50.57	78.30	-27.73	Peak	
4	5725.0000	1.22	41.27	42.49	68.30	-25.81	AVG	
5	5748.8000	35.04	41.30	76.34	68.30	8.04	AVG	no limit
6	5750.0000	44.58	41.30	85.88	78.30	7.58	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Horizontal


80 dBuV/m

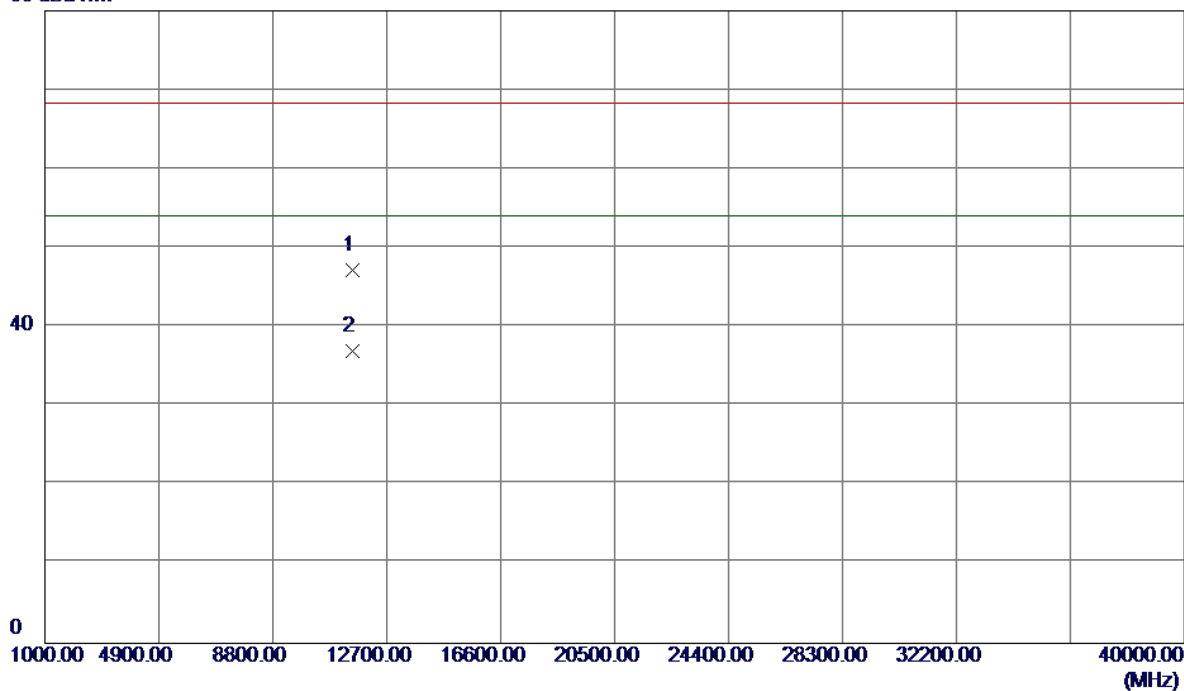

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11510.2699	30.29	16.95	47.24	68.30	-21.06	Peak	
2	11510.2699	20.08	16.95	37.03	54.00	-16.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical

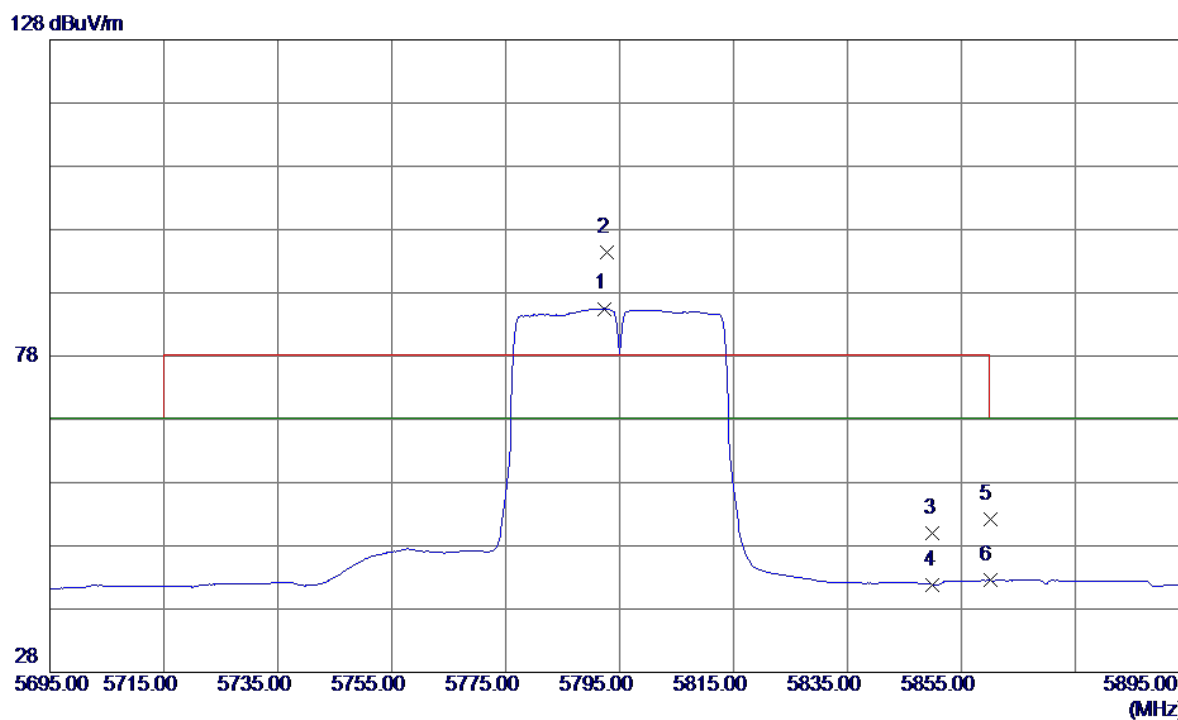


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5792.4000	44.14	41.36	85.50	68.30	17.20	AVG	no limit
2	5792.8000	52.99	41.36	94.35	78.30	16.05	Peak	no limit
3	5850.0000	8.55	41.44	49.99	78.30	-28.31	Peak	
4	5850.0000	0.45	41.44	41.89	68.30	-26.41	AVG	
5	5860.0000	10.79	41.45	52.24	78.30	-26.06	Peak	
6	5860.0000	1.07	41.45	42.52	68.30	-25.78	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical


80 dBuV/m

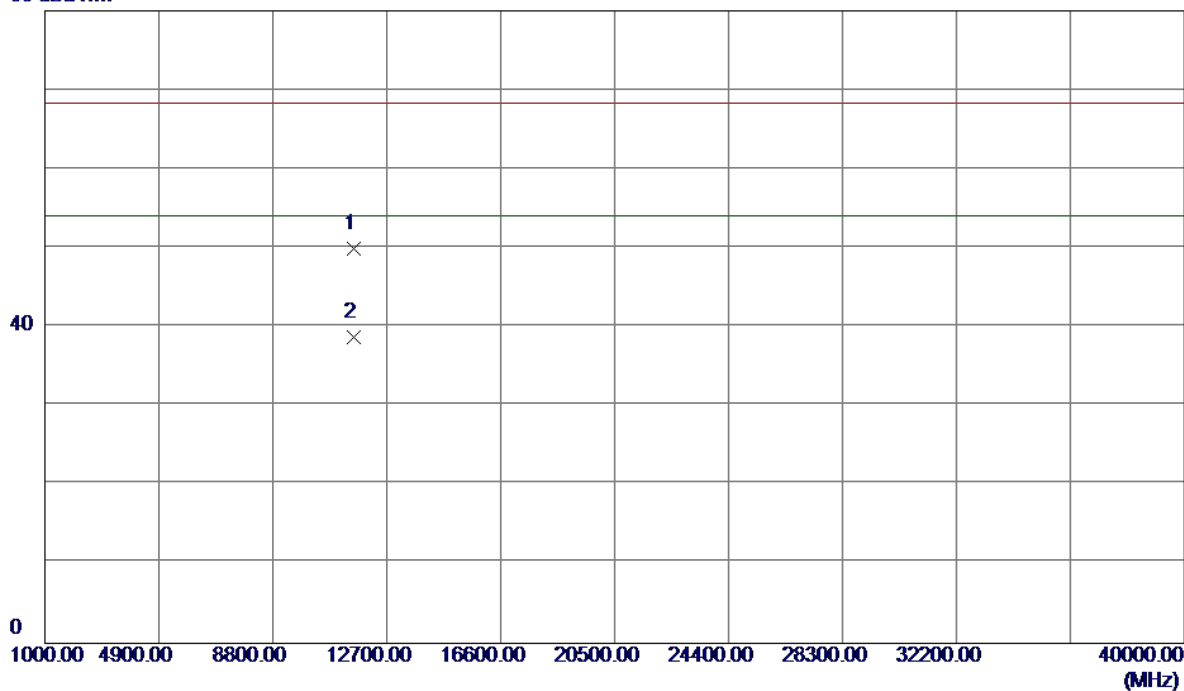

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11590.0300	32.80	17.08	49.88	68.30	-18.42	Peak	
2	11590.0300	21.58	17.08	38.66	54.00	-15.34	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

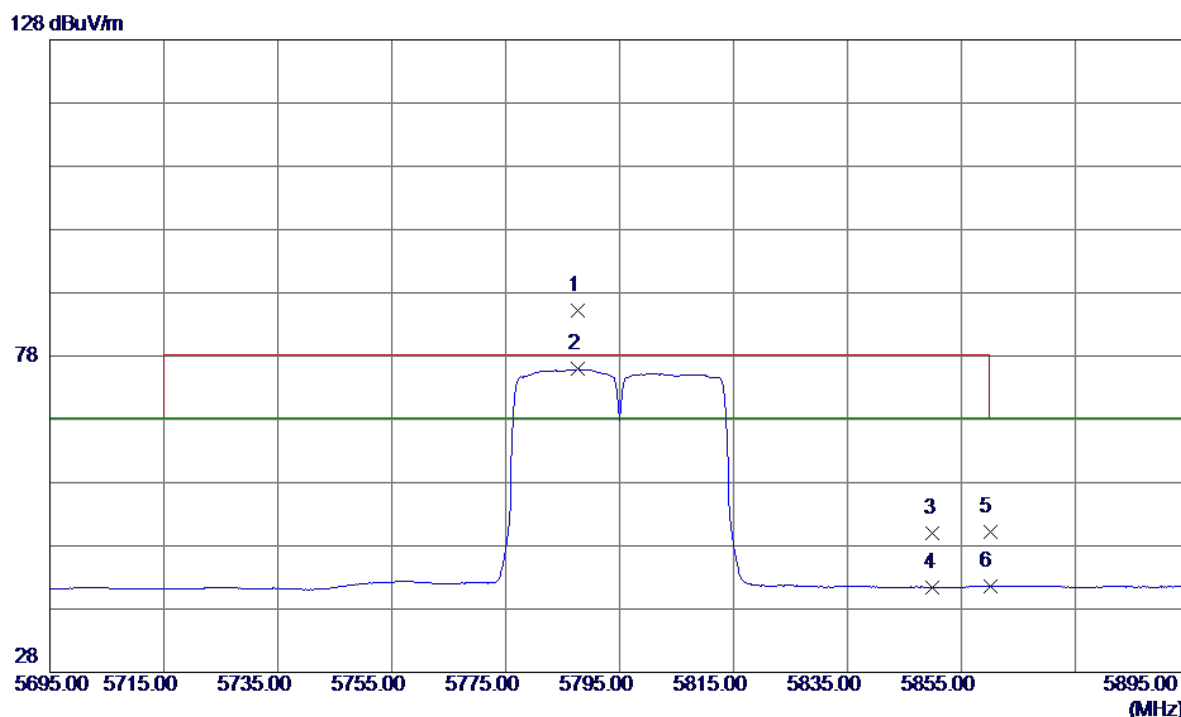


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5787.6000	43.82	41.35	85.17	78.30	6.87	Peak	no limit
2	5787.6000	34.56	41.35	75.91	68.30	7.61	AVG	no limit
3	5850.0000	8.51	41.44	49.95	78.30	-28.35	Peak	
4	5850.0000	0.01	41.44	41.45	68.30	-26.85	AVG	
5	5860.0000	8.74	41.45	50.19	78.30	-28.11	Peak	
6	5860.0000	0.16	41.45	41.61	68.30	-26.69	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

80 dBuV/m

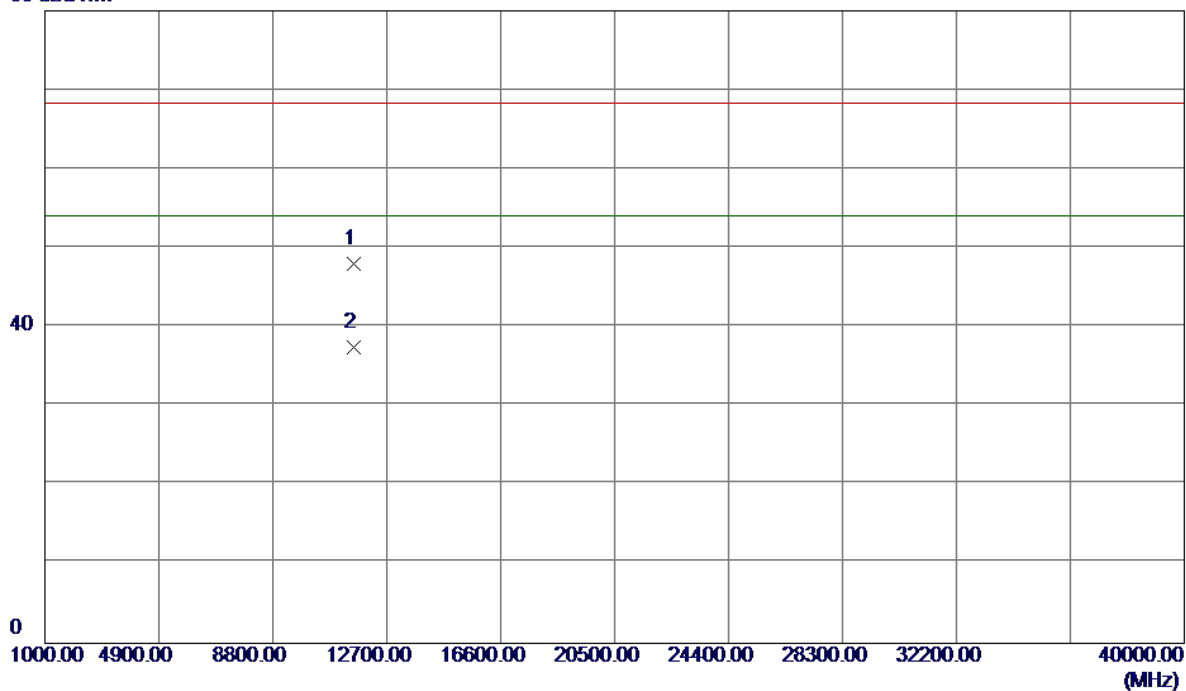


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11590.7400	30.94	17.08	48.02	68.30	-20.28	Peak	
2	11590.7400	20.38	17.08	37.46	54.00	-16.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

128 dBuV/m

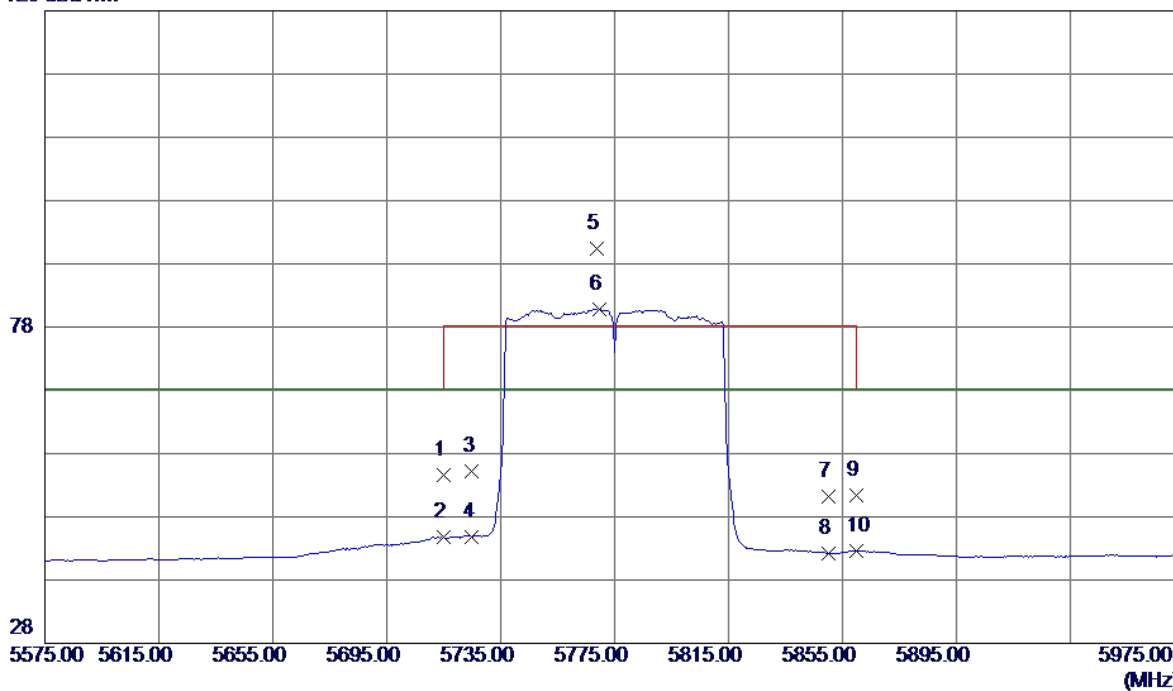


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	13.44	41.25	54.69	68.30	-13.61	Peak	
2	5715.0000	3.47	41.25	44.72	68.30	-23.58	AVG	
3	5725.0000	13.93	41.27	55.20	78.30	-23.10	Peak	
4	5725.0000	3.60	41.27	44.87	68.30	-23.43	AVG	
5	5768.6000	49.05	41.33	90.38	78.30	12.08	Peak	no limit
6	5769.8000	39.52	41.33	80.85	68.30	12.55	AVG	no limit
7	5850.0000	9.77	41.44	51.21	78.30	-27.09	Peak	
8	5850.0000	0.76	41.44	42.20	68.30	-26.10	AVG	
9	5860.0000	9.90	41.45	51.35	78.30	-26.95	Peak	
10	5860.0000	1.09	41.45	42.54	68.30	-25.76	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical


80 dBuV/m

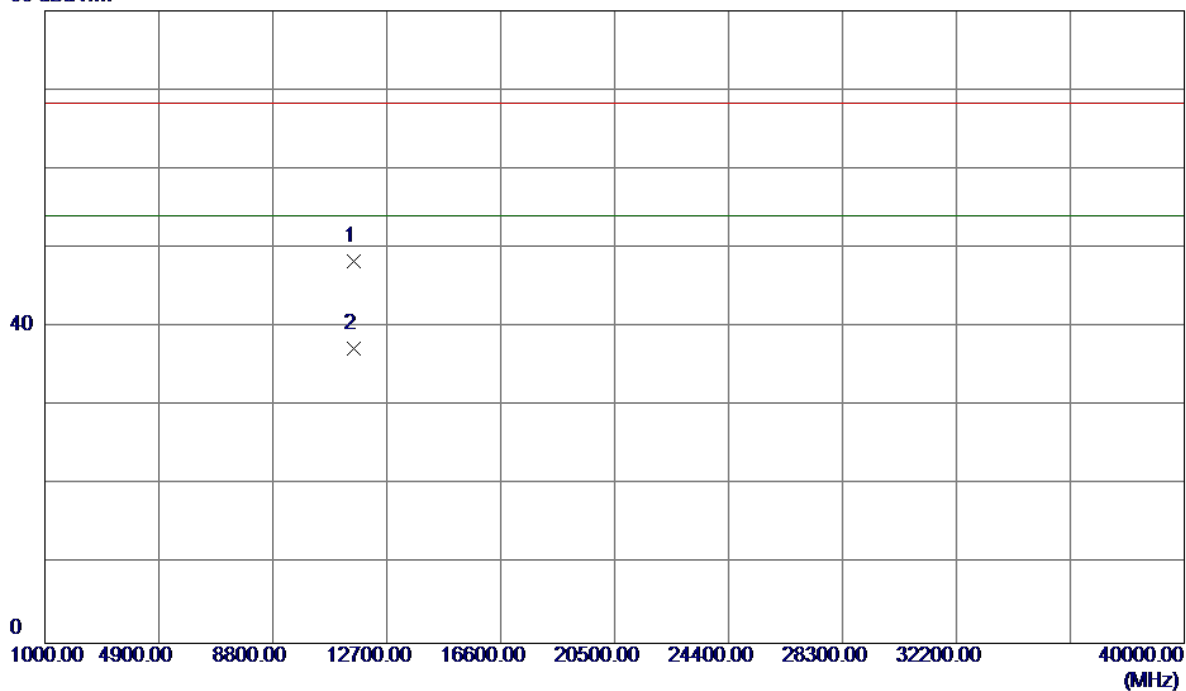

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11552.3700	31.35	17.02	48.37	68.30	-19.93	Peak	
2	11552.3700	20.22	17.02	37.24	54.00	-16.76	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

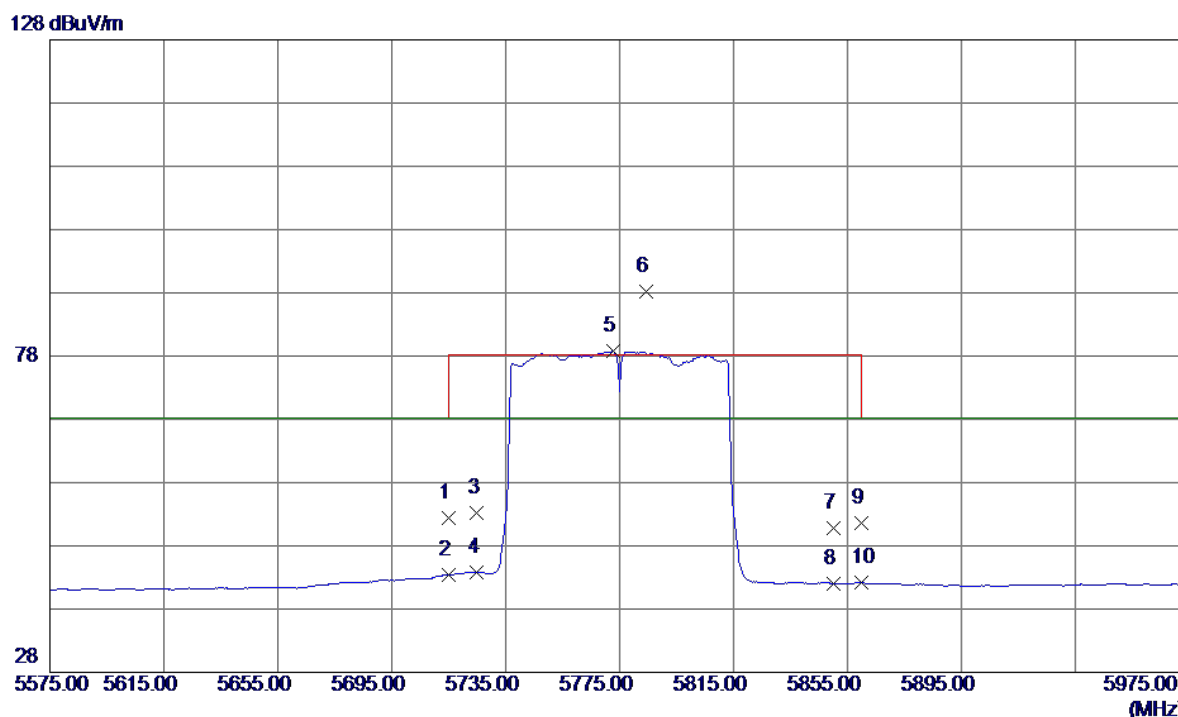


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	11.13	41.25	52.38	68.30	-15.92	Peak	
2	5715.0000	2.18	41.25	43.43	68.30	-24.87	AVG	
3	5725.0000	11.96	41.27	53.23	78.30	-25.07	Peak	
4	5725.0000	2.53	41.27	43.80	68.30	-24.50	AVG	
5	5772.6000	37.42	41.33	78.75	68.30	10.45	AVG	no limit
6	5784.2000	46.92	41.35	88.27	78.30	9.97	Peak	no limit
7	5850.0000	9.30	41.44	50.74	78.30	-27.56	Peak	
8	5850.0000	0.54	41.44	41.98	68.30	-26.32	AVG	
9	5860.0000	10.09	41.45	51.54	78.30	-26.76	Peak	
10	5860.0000	0.67	41.45	42.12	68.30	-26.18	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

80 dBuV/m

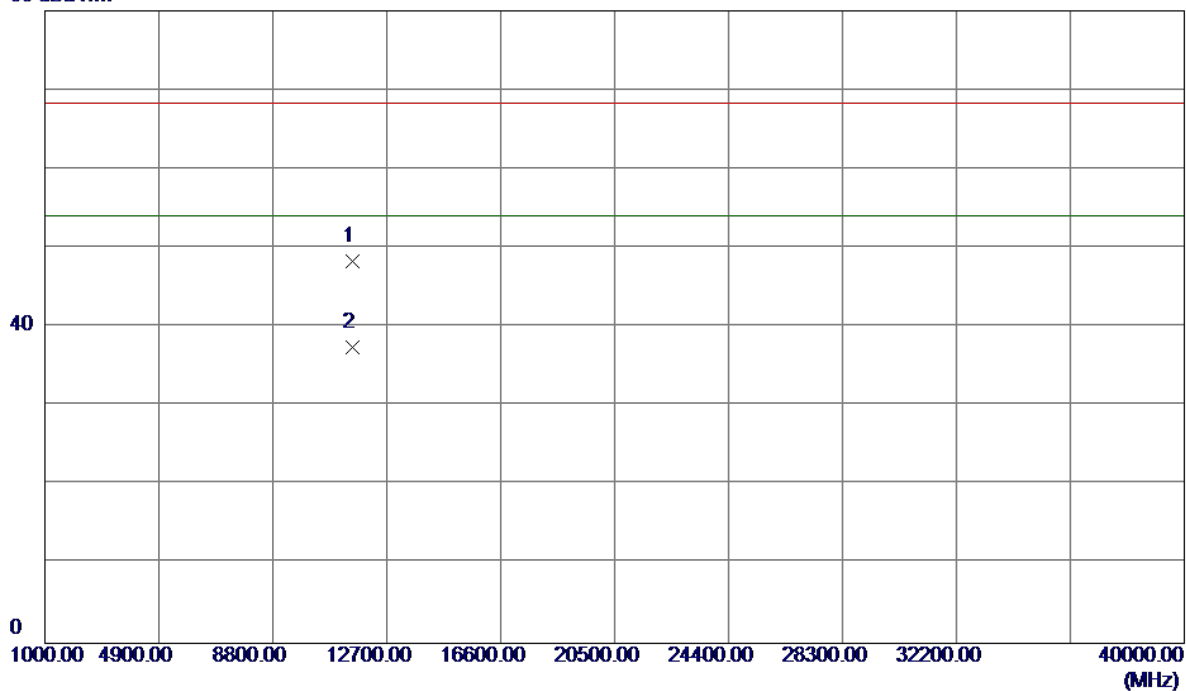

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11550.1600	31.32	17.01	48.33	68.30	-19.97	Peak	
2	11550.1600	20.40	17.01	37.41	54.00	-16.59	AVG	

TX A Mode_DUTY CYCLE

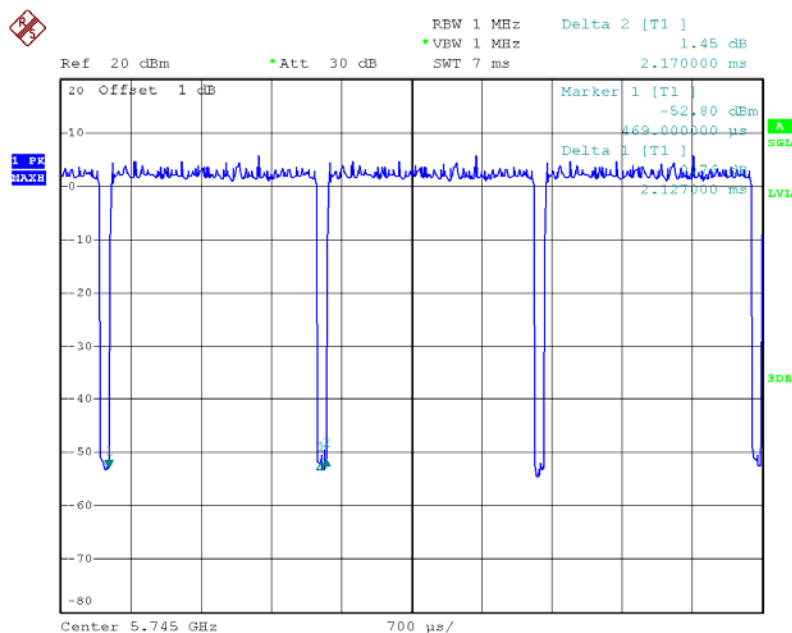

Date: 5.MAY.2015 17:10:39

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} :2.13msec

T_{Total} :2.17msec


Duty cycle: 98.16%

Duty Factor= $10 \log(1/\text{Duty cycle})$

Duty Factor =0.08

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Ducy factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

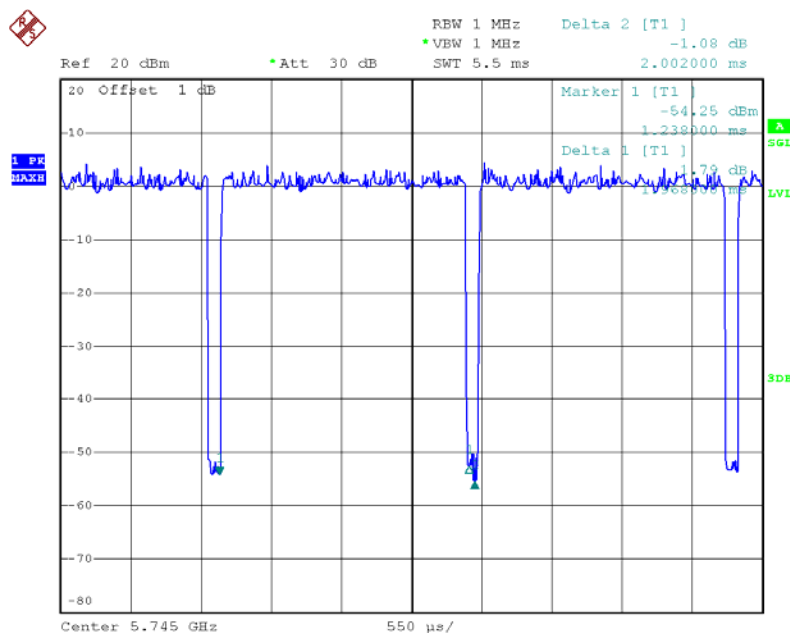

Date: 5.MAY.2015 17:16:00

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} :1.97msec

T_{Total} :2.00msec


Duty cycle: 98.50%

Duty Factor= $10 \log(1/\text{Duty cycle})$

Duty Factor =0.07

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Ducy factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

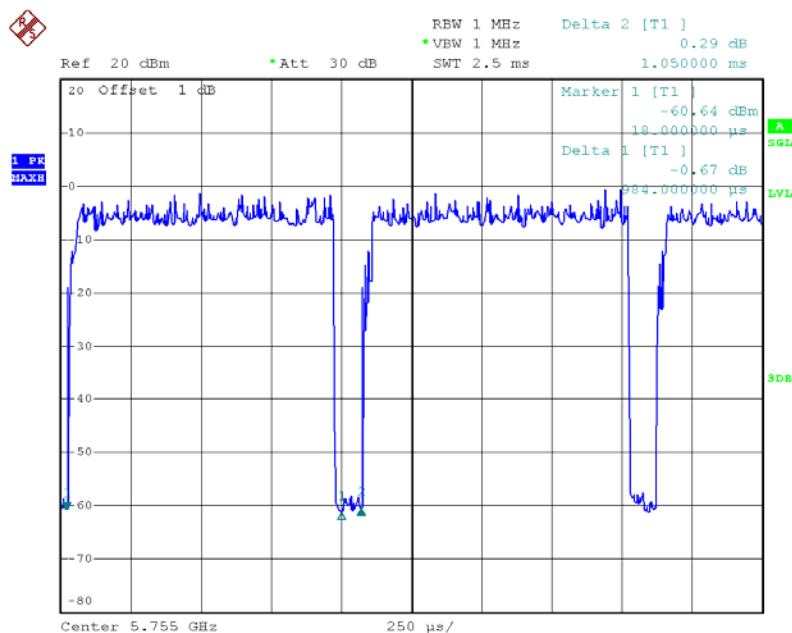

Date: 5.MAY.2015 17:22:55

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} :0.98msec

T_{Total} :1.05msec

Duty cycle: 93.33%

Duty Factor= $10 \log(1/\text{Duty cycle})$


Duty Factor =0.30

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

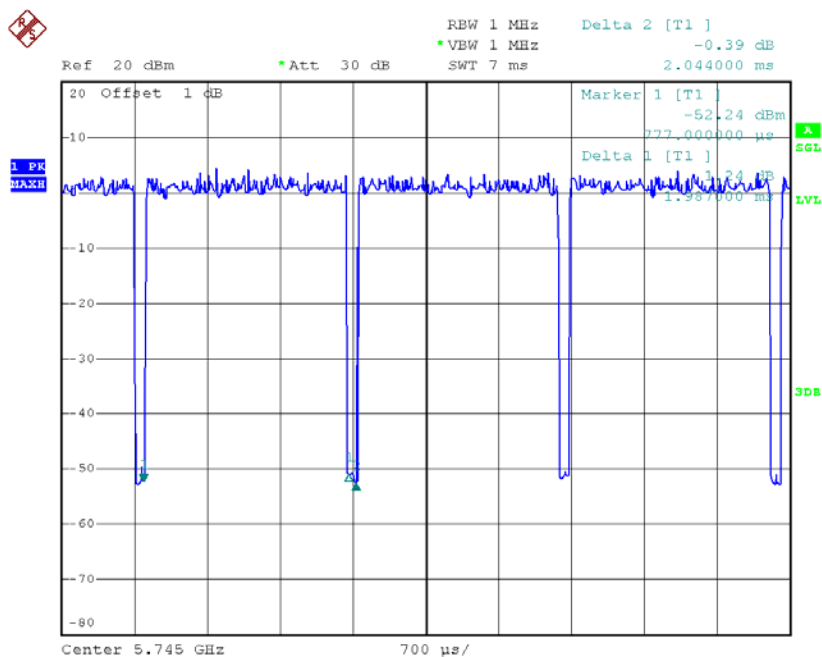

Date: 5.MAY.2015 17:20:15

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :1.99msec

T_{Total} :2.04msec

Duty cycle: 97.55%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor =0.11

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

$$\text{Output Power} = \text{Measured power} + \text{Ducy factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX AC40 Mode_DUTY CYCLE

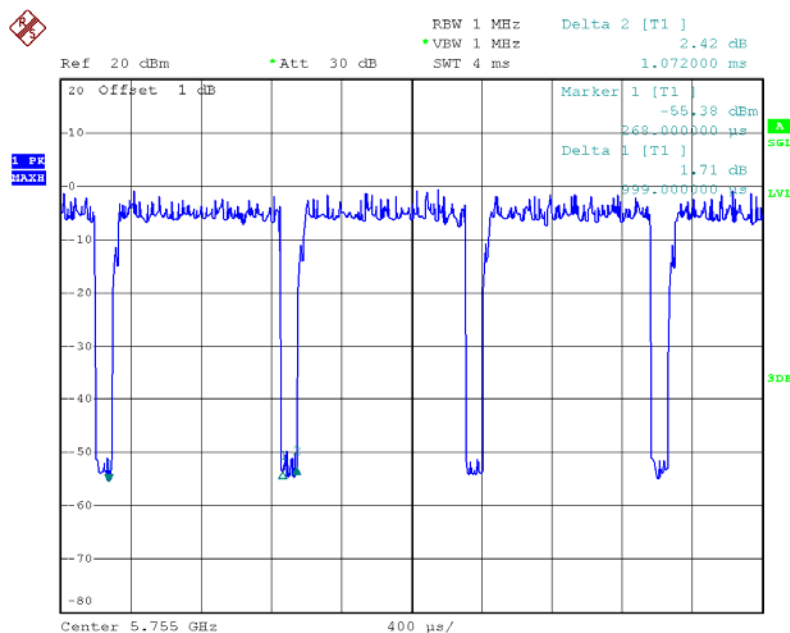

Date: 5.MAY.2015 17:24:53

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} :1.00msec

T_{Total} :1.07msec

Duty cycle: 93.46%

Duty Factor= $10 \log(1/\text{Duty cycle})$


Duty Factor =0.29

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

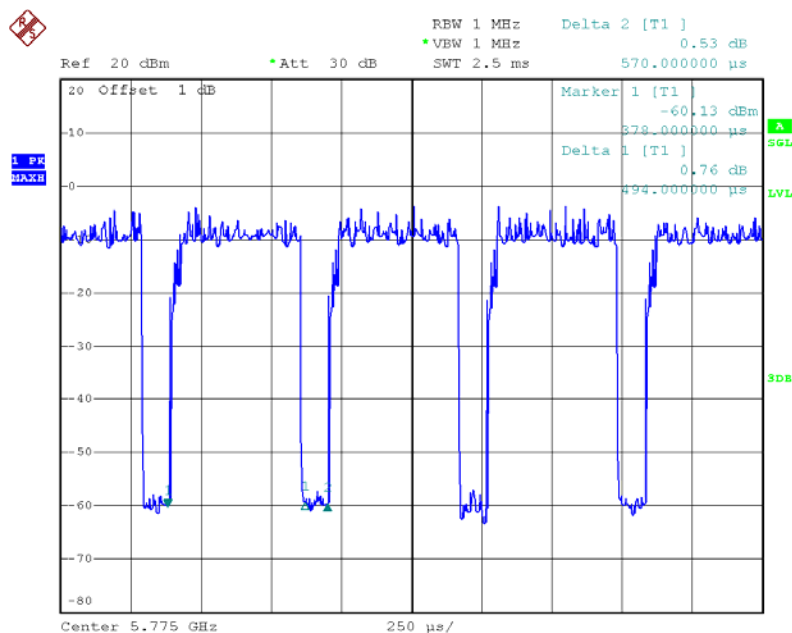

Date: 5.MAY.2015 17:27:22

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} :0.49msec

T_{Total} :0.57msec

Duty cycle: 85.96%

Duty Factor= $10 \log(1/\text{Duty cycle})$

Duty Factor =0.66

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor


Power Spectral Density = Measured density + Duty factor

ATTACHMENTE -BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.80	17.30
CH40	5200	21.85	17.40
CH48	5240	21.75	17.30

TX CH36

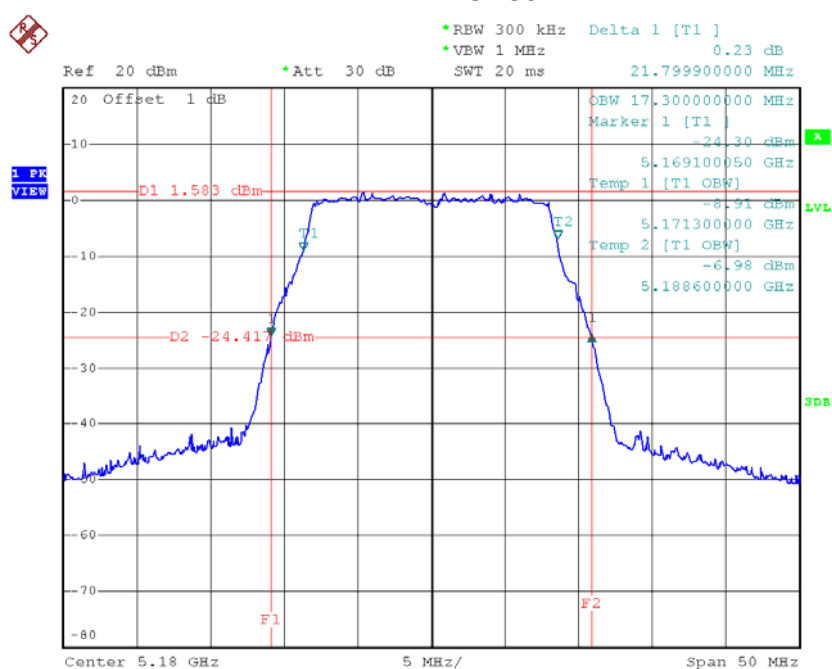


Date: 5.MAY.2015 15:58:31

TX CH40

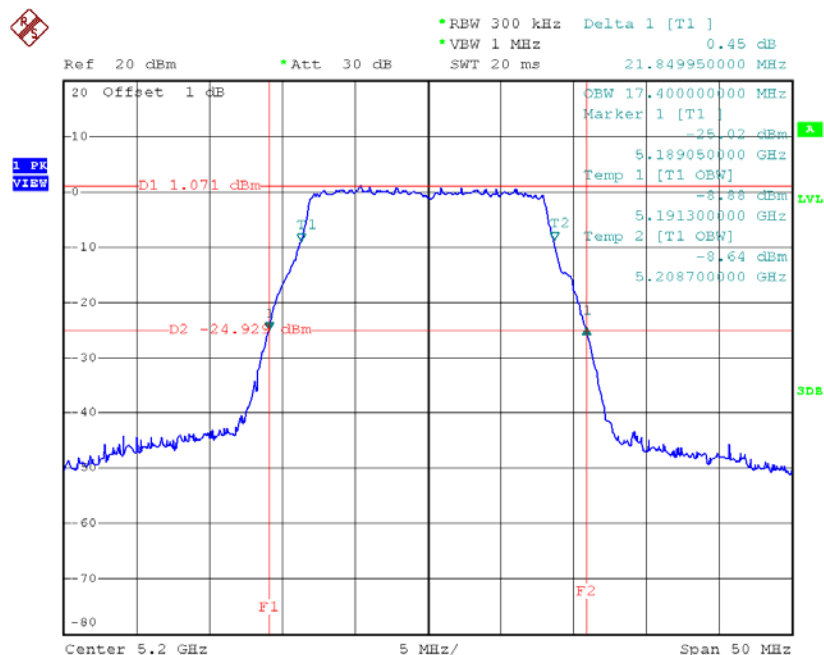


Date: 5.MAY.2015 16:01:03

TX CH48

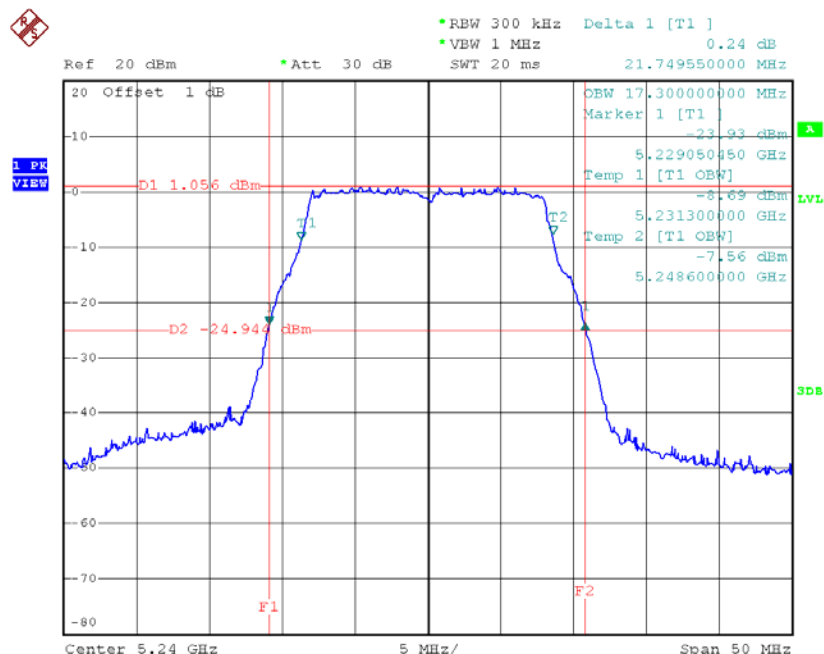


Date: 5.MAY.2015 16:02:22

TX CH40

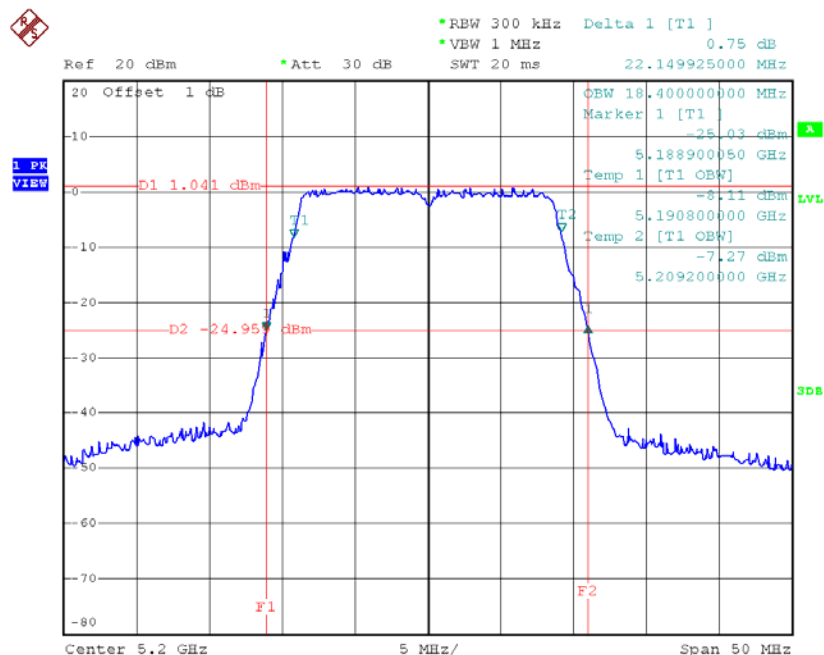

Date: 5.MAY.2015 16:05:48

TX CH48

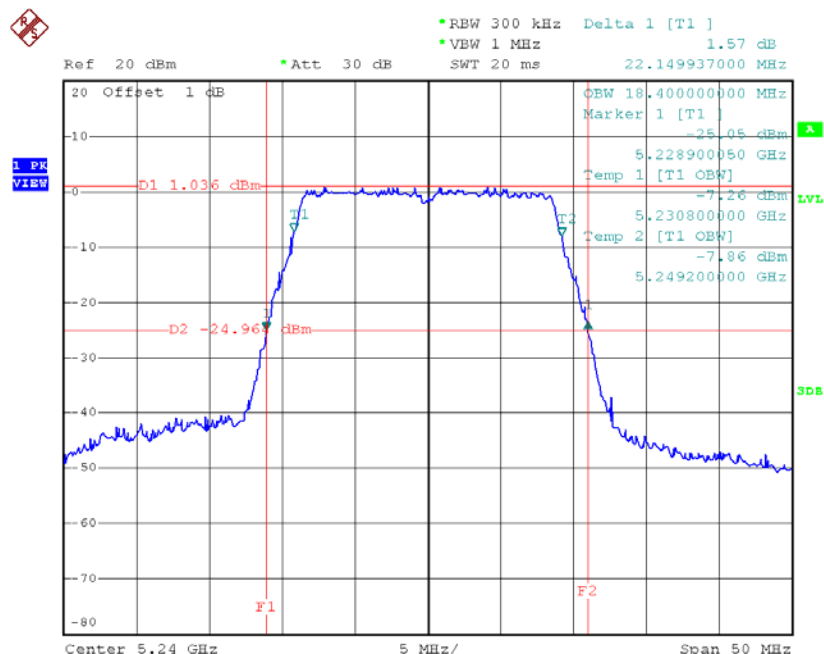


Date: 5.MAY.2015 16:06:53

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.00	36.40
CH46	5230	40.20	36.40

TX CH38

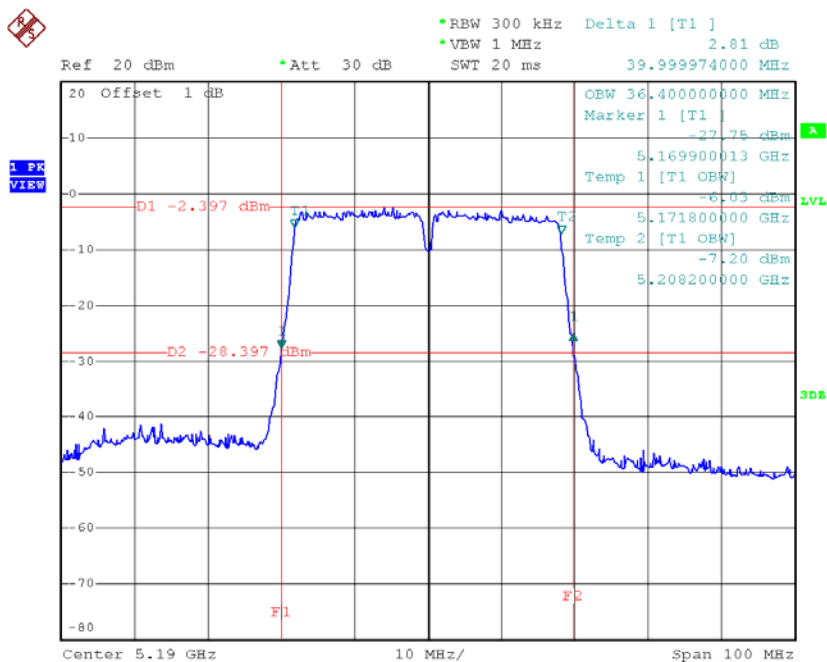

Date: 5.MAY.2015 16:11:11

TX CH46

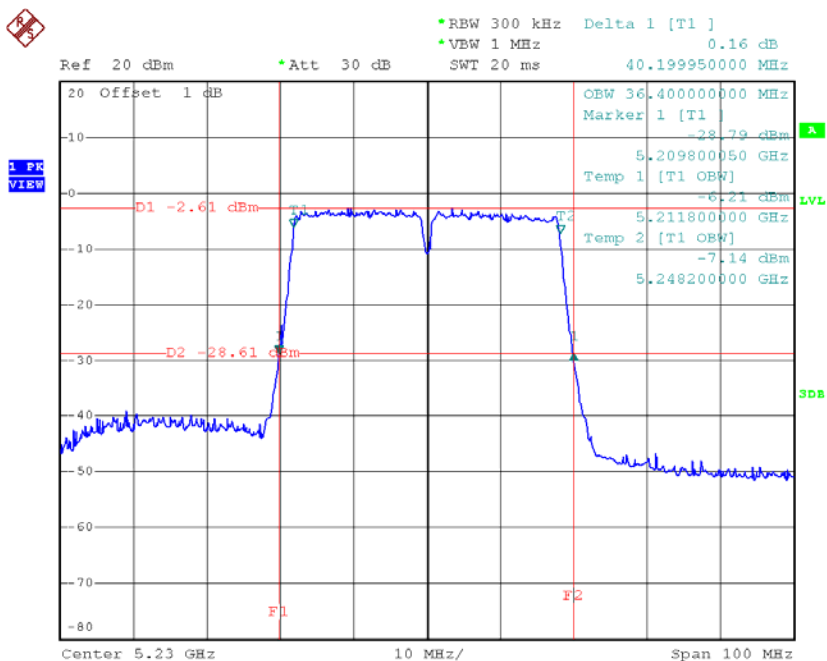


Date: 5.MAY.2015 16:12:33

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	21.89	17.30
CH60	5300	21.85	17.40
CH64	5320	21.79	17.40

TX CH52

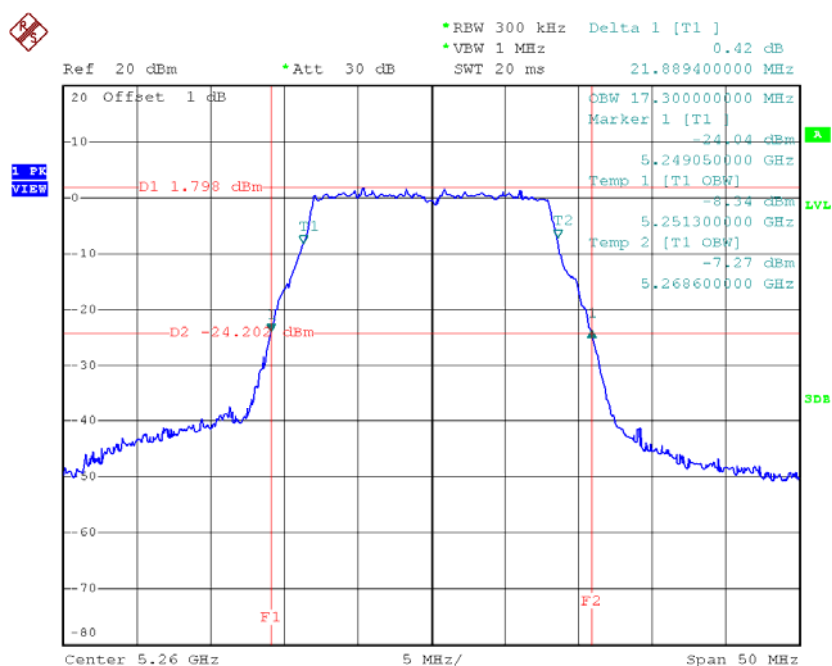


Date: 5.MAY.2015 16:18:34

TX CH60

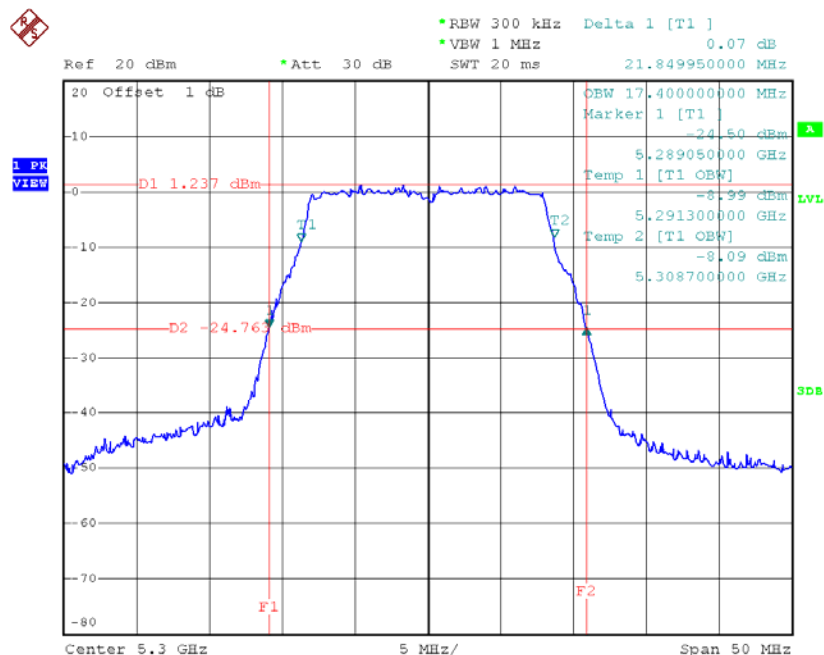

Date: 5.MAY.2015 16:20:30

TX CH64

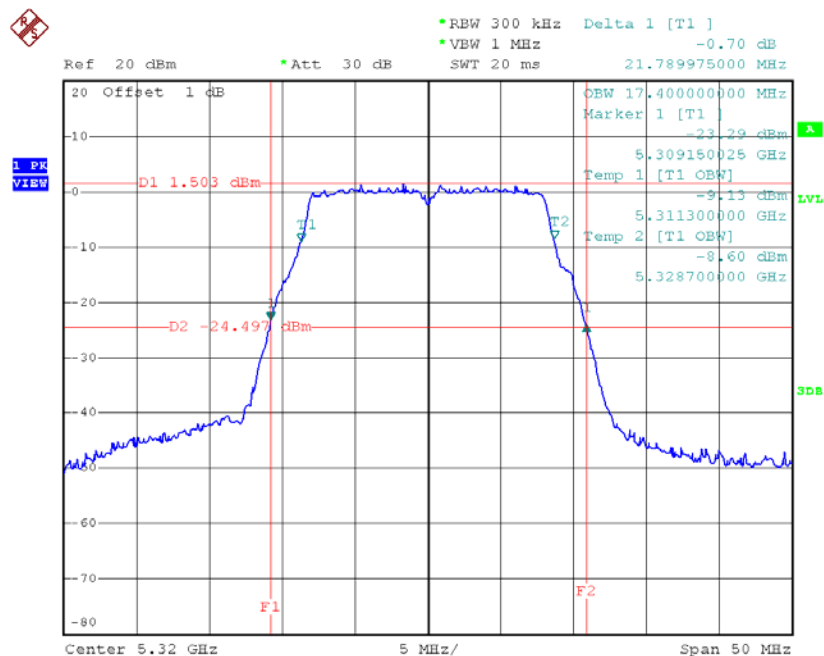


Date: 5.MAY.2015 16:21:30

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.00	18.30
CH60	5300	22.05	18.40
CH64	5320	22.05	18.40

TX CH52

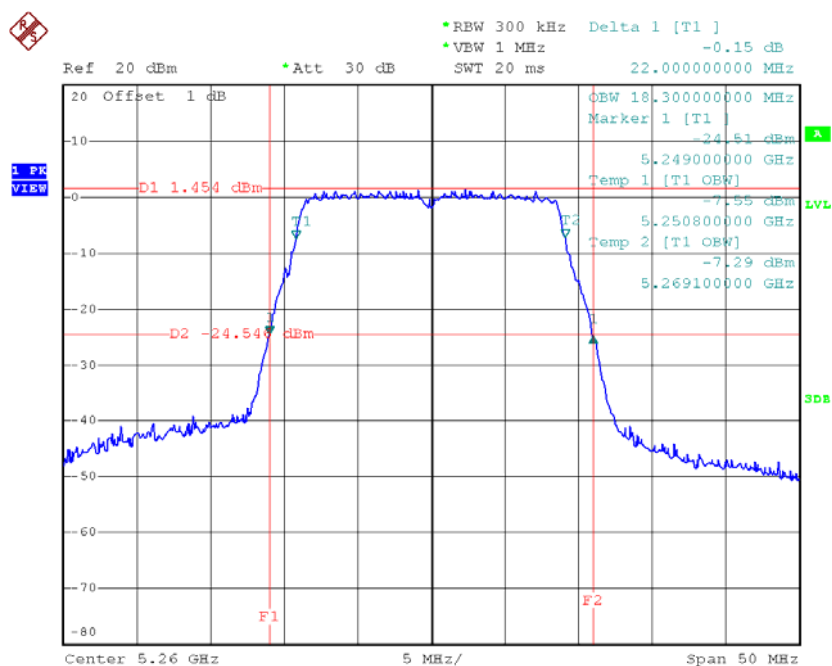


Date: 5.MAY.2015 16:22:52

TX CH60

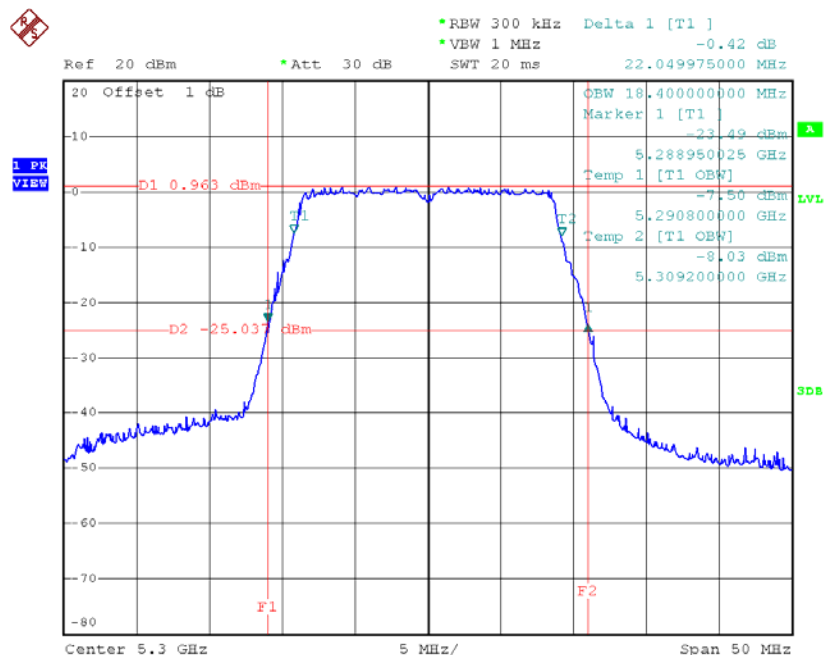

Date: 5.MAY.2015 16:24:08

TX CH64

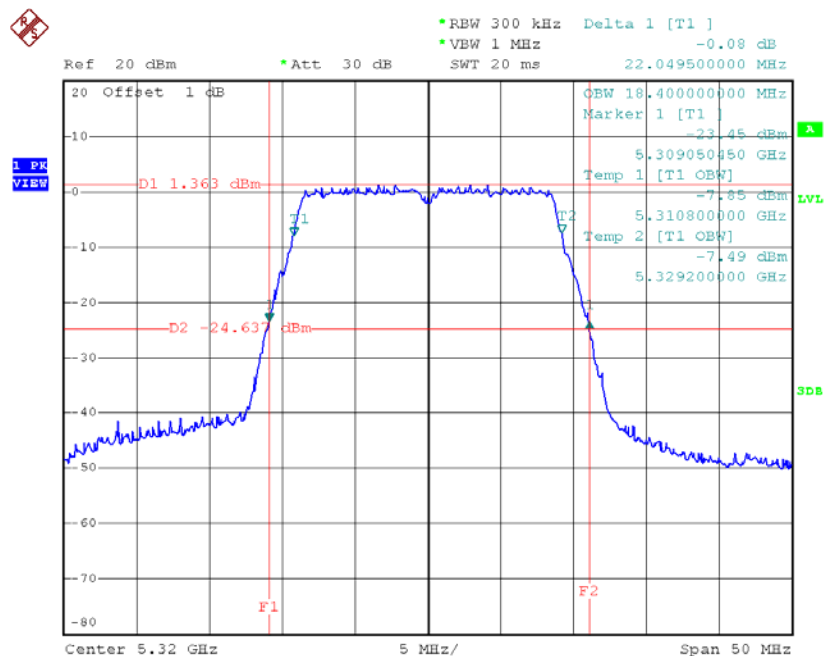


Date: 5.MAY.2015 16:25:05

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.10	36.40
CH62	5310	40.10	36.40

TX CH54

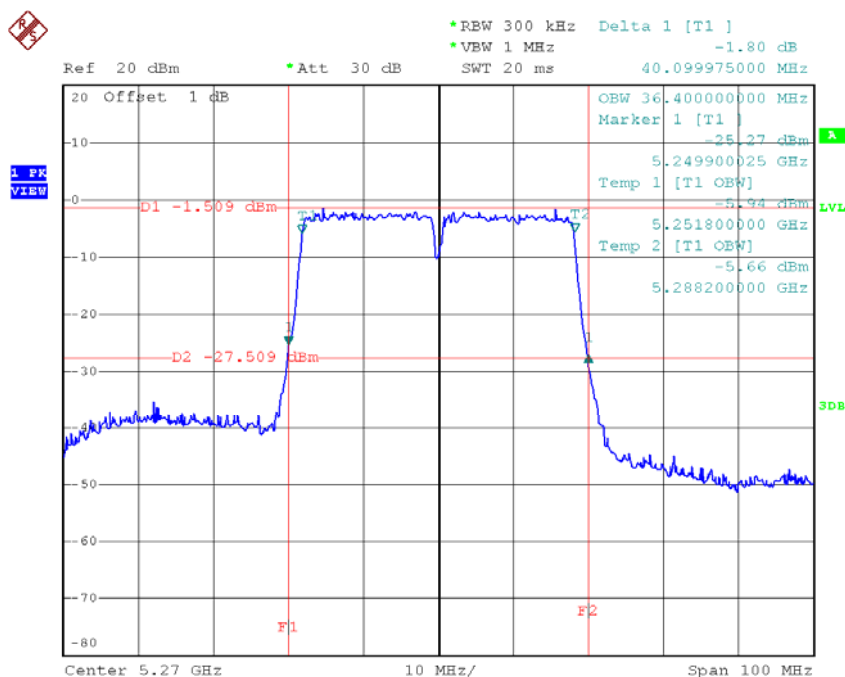

Date: 5.MAY.2015 16:29:43

TX CH62

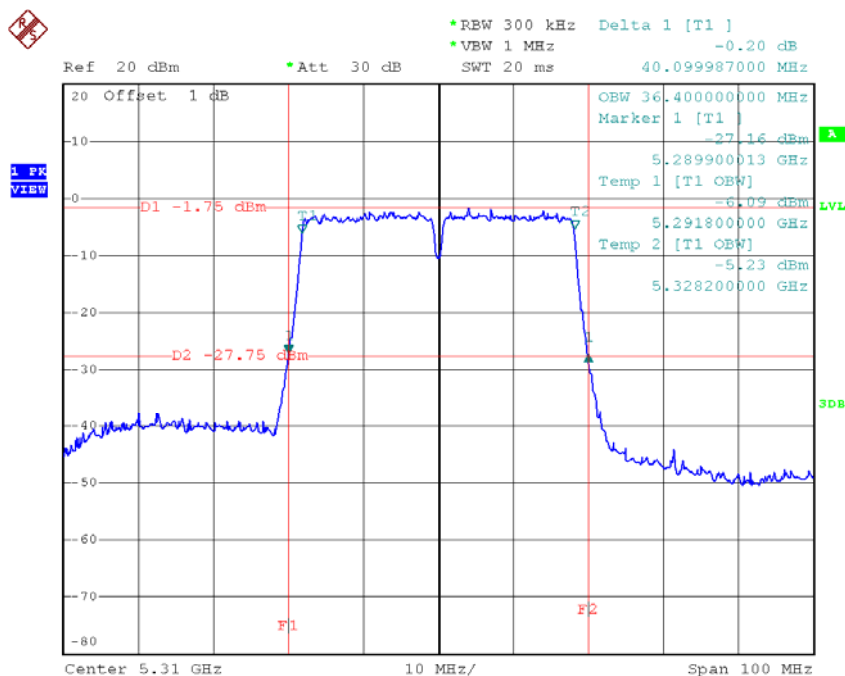


Date: 5.MAY.2015 16:30:46

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.80	17.30
CH116	5580	21.89	17.30
CH140	5700	21.75	17.30

TX CH100

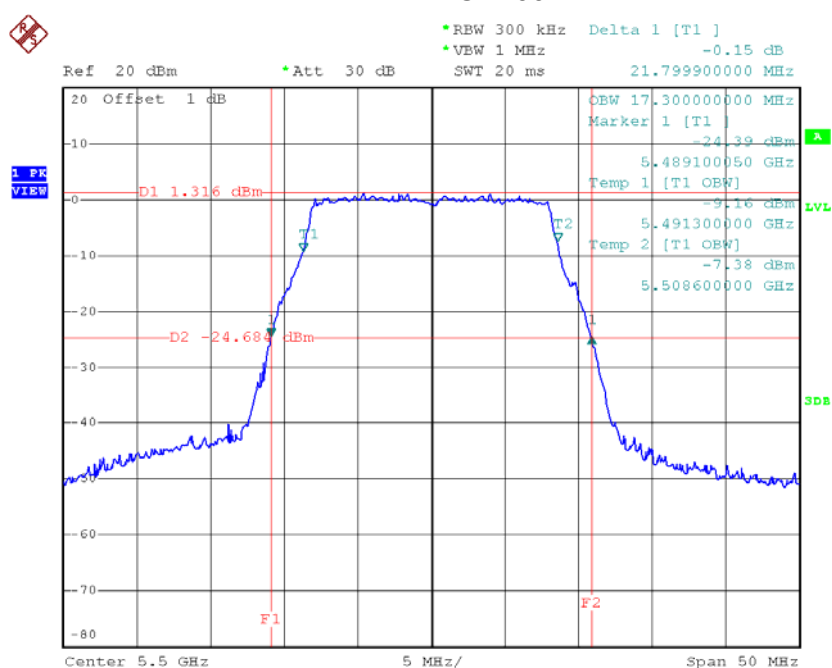


Date: 5.MAY.2015 16:45:55

TX CH116

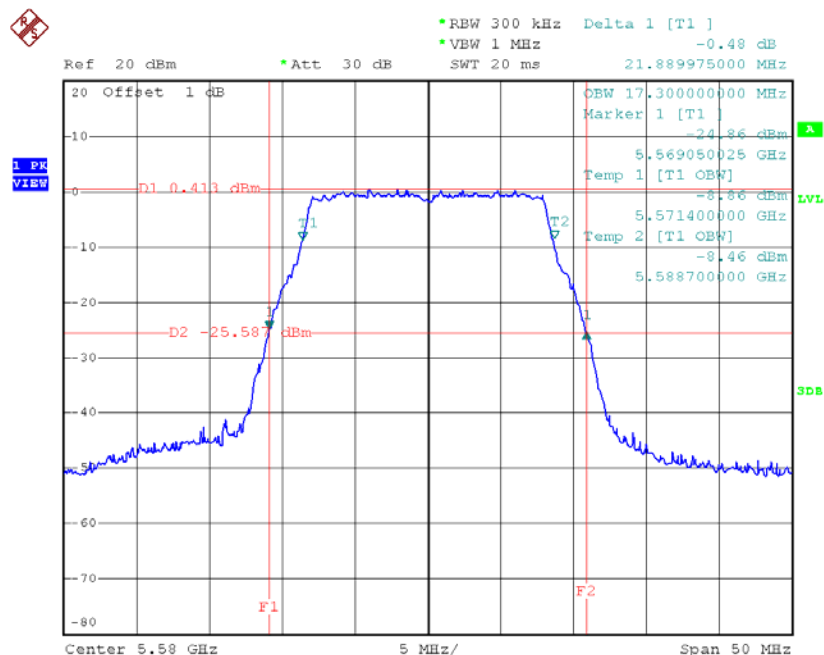

Date: 5.MAY.2015 16:48:23

TX CH140

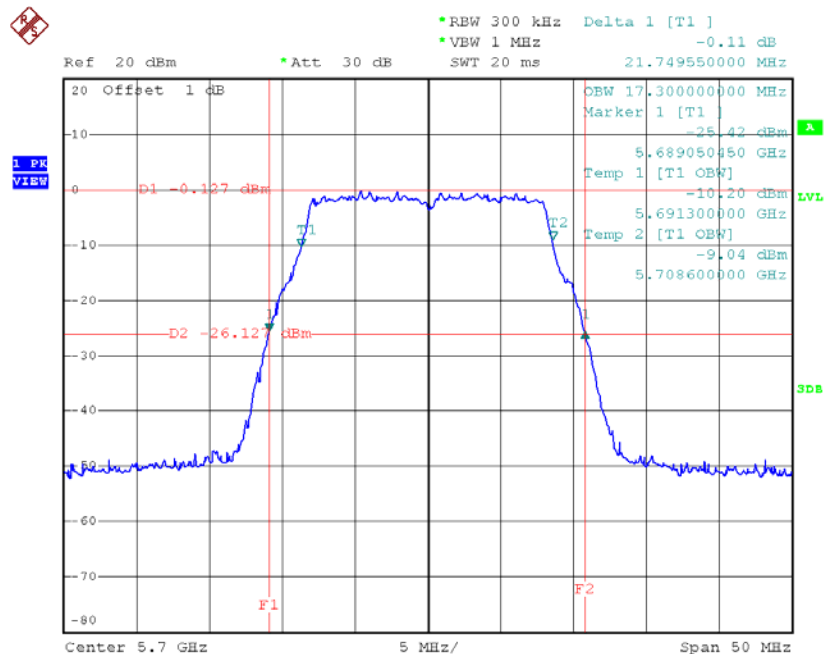


Date: 5.MAY.2015 17:28:30

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.20	18.30
CH116	5580	22.05	18.30
CH140	5700	22.25	18.40

TX CH100

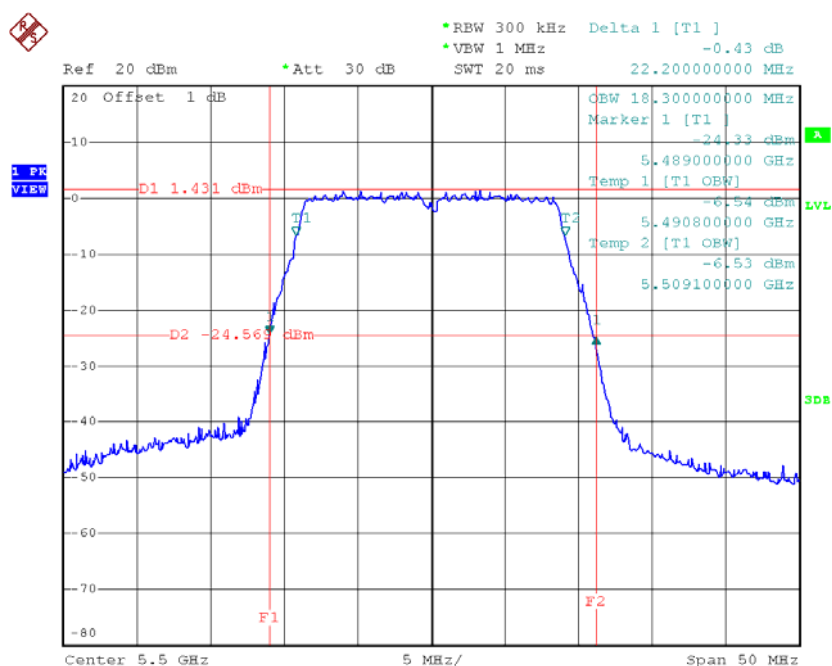


Date: 5.MAY.2015 16:50:34

TX CH116

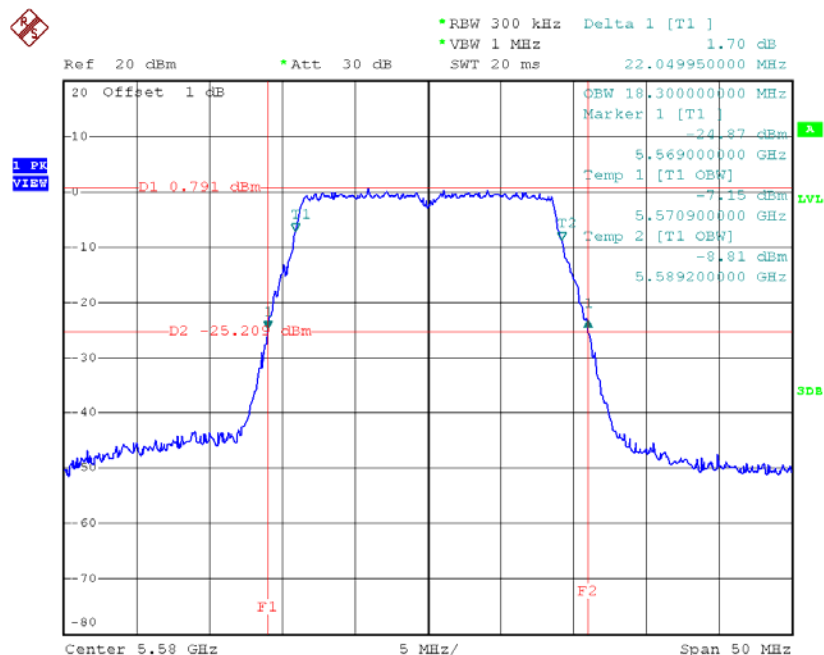

Date: 5.MAY.2015 16:51:45

TX CH140

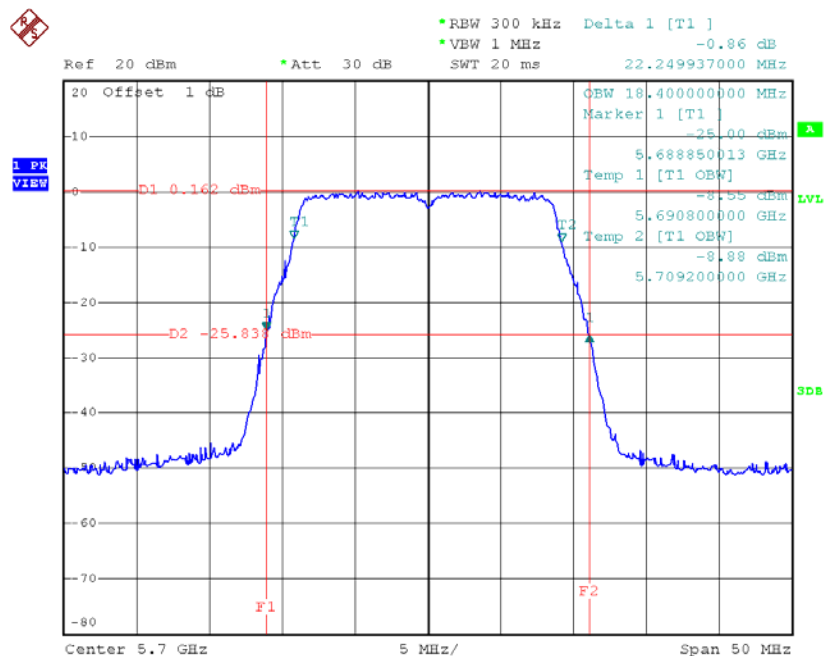


Date: 5.MAY.2015 16:52:27

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	40.00	36.40
CH110	5550	40.20	36.40
CH134	5670	40.20	36.40

TX CH102

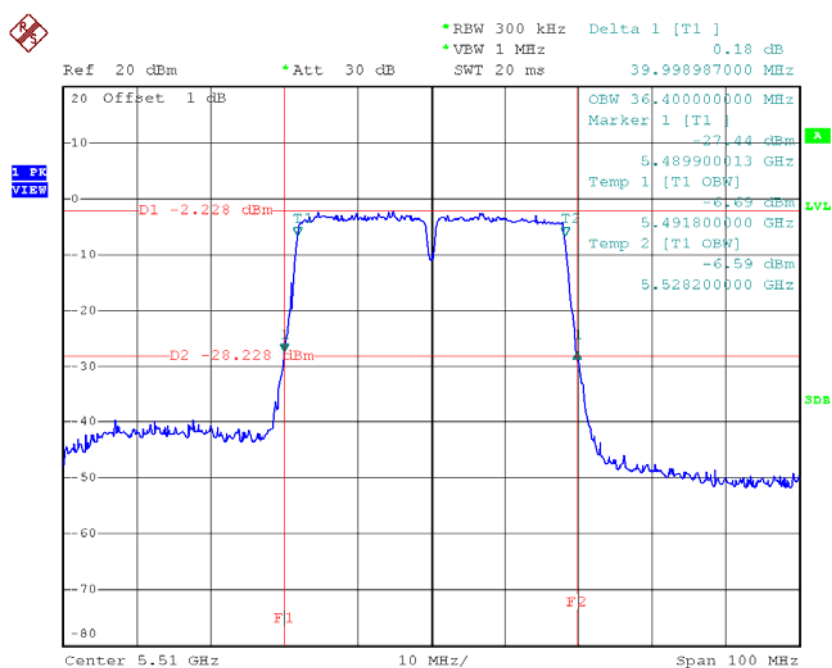


Date: 5.MAY.2015 16:57:14

TX CH110

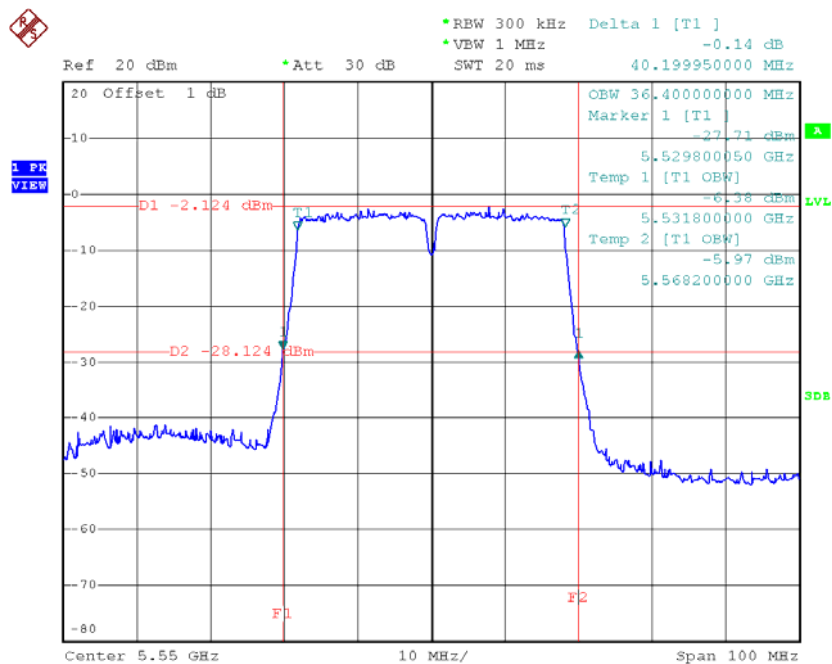

Date: 5.MAY.2015 16:59:27

TX CH134

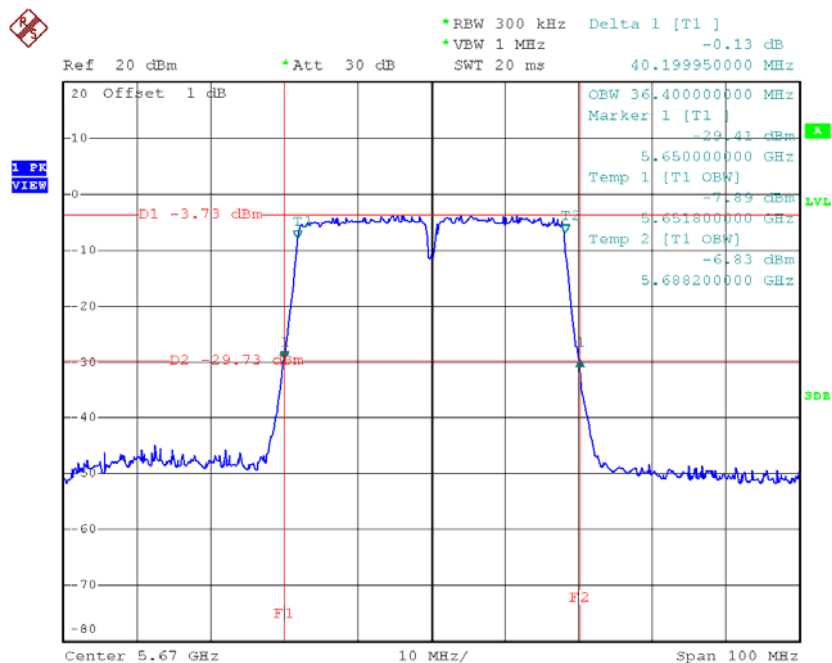


Date: 5.MAY.2015 17:00:10

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.65	17.30	>=500
CH157	5785	16.66	17.40	>=500
CH165	5825	16.69	17.40	>=500

TX CH 149

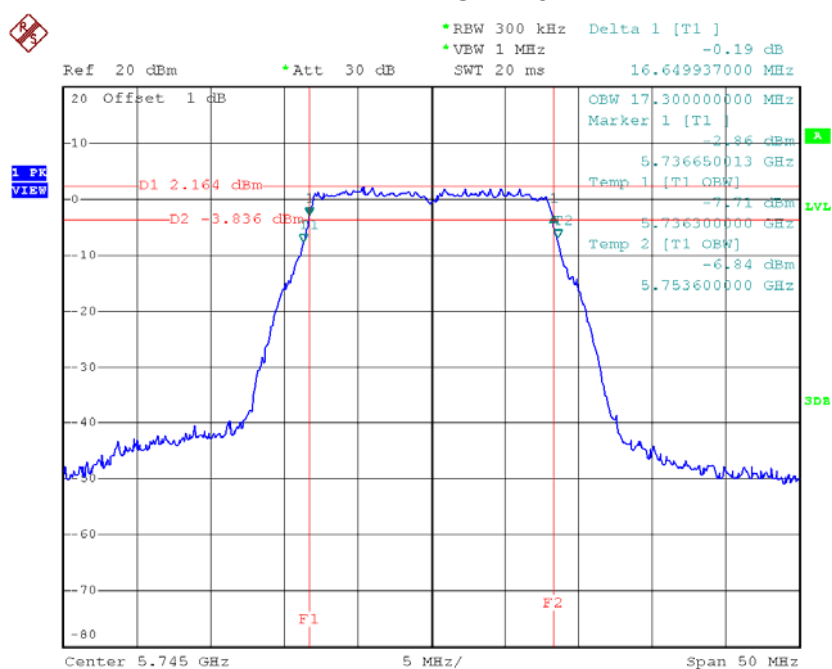


Date: 5.MAY.2015 17:09:50

TX CH 157

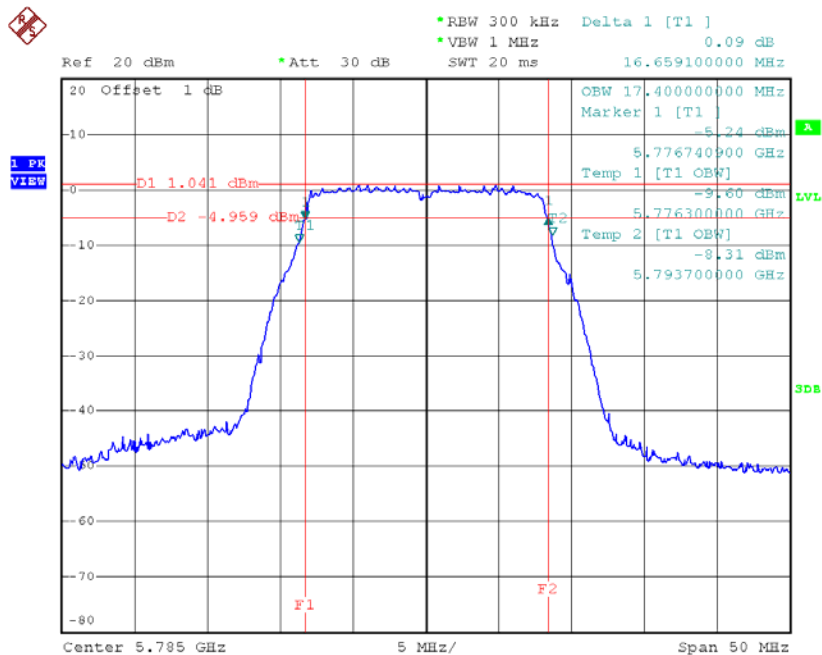

Date: 5.MAY.2015 17:11:42

TX CH 165

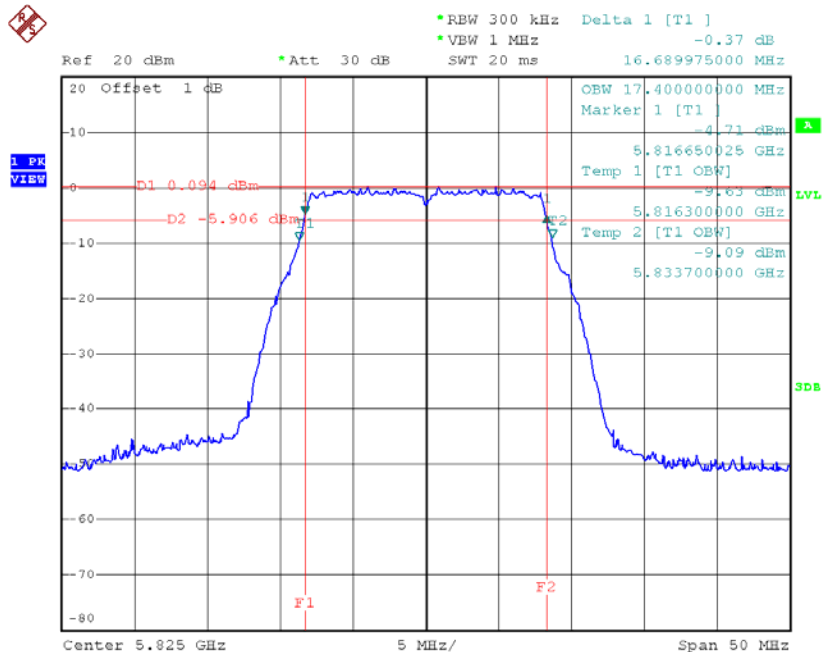


Date: 5.MAY.2015 17:14:03

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.84	18.50	>=500
CH157	5785	17.89	18.40	>=500
CH165	5825	17.80	18.30	>=500

TX CH 149

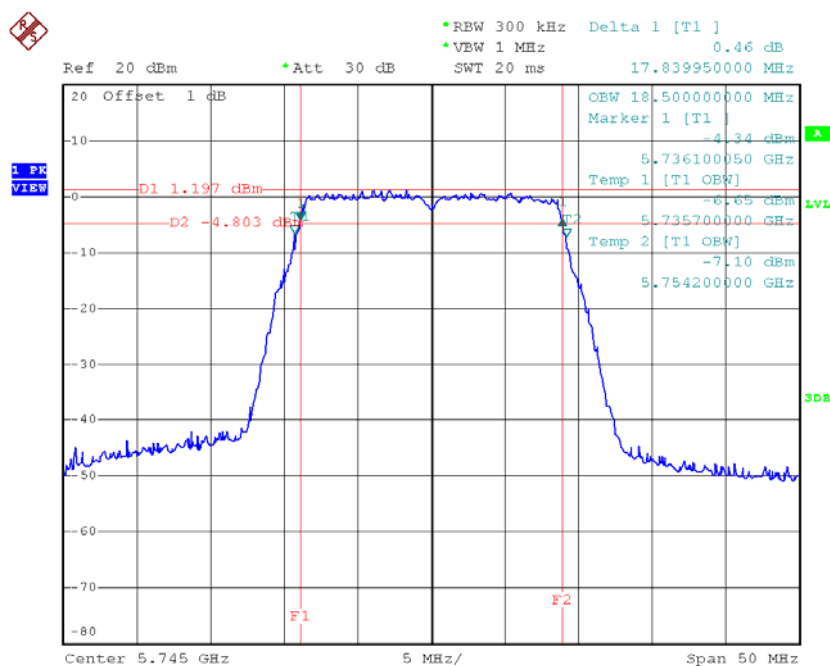


Date: 5.MAY.2015 17:15:17

TX CH 157

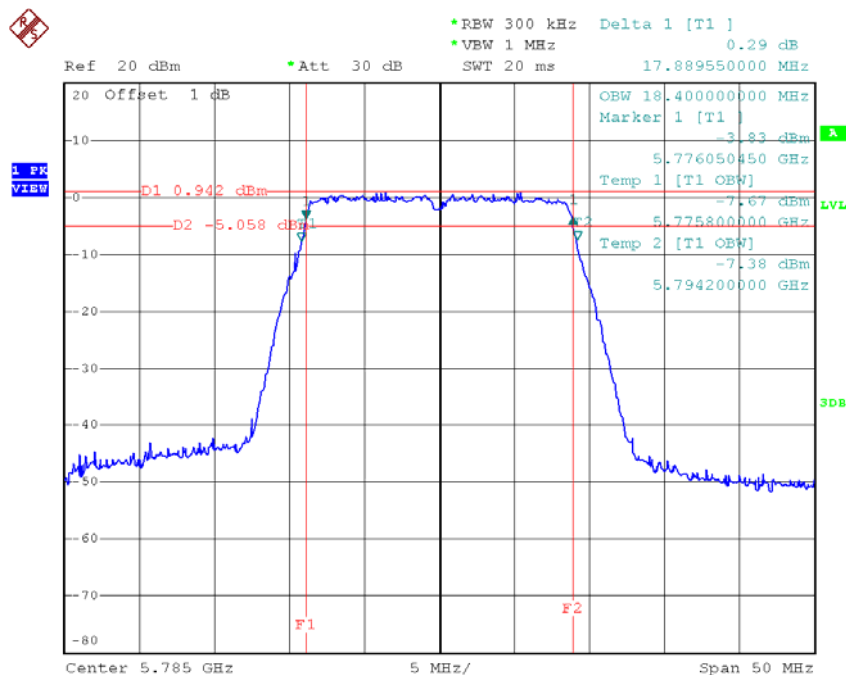

Date: 5.MAY.2015 17:16:39

TX CH 165

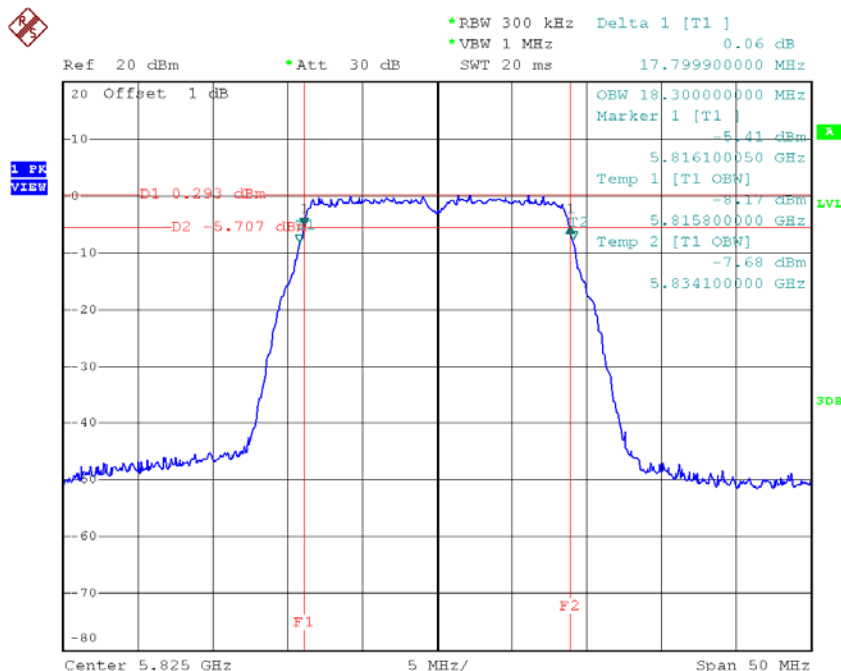


Date: 5.MAY.2015 17:17:20

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.59	36.40	>=500
CH159	5795	36.59	36.40	>=500

TX CH 151

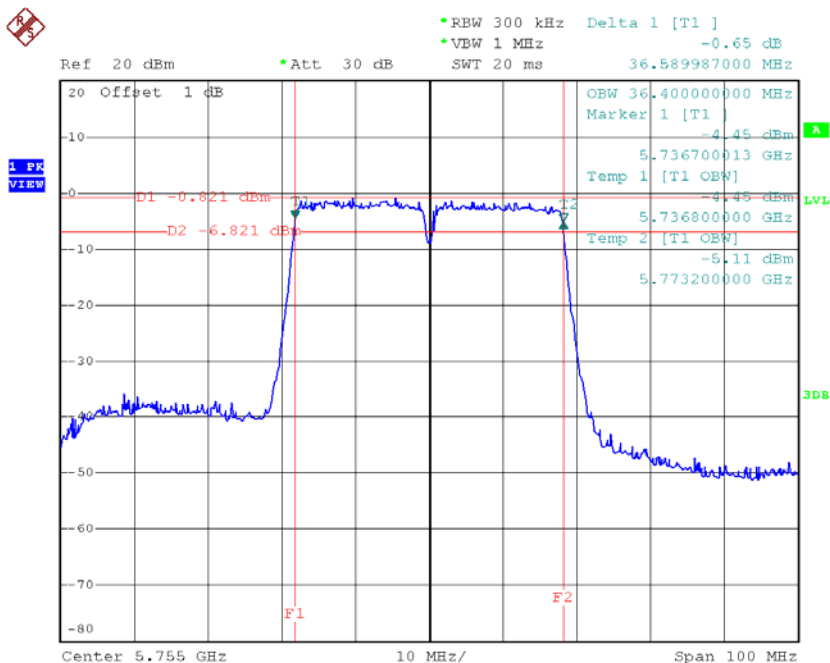

Date: 5.MAY.2015 17:22:27

TX CH 159

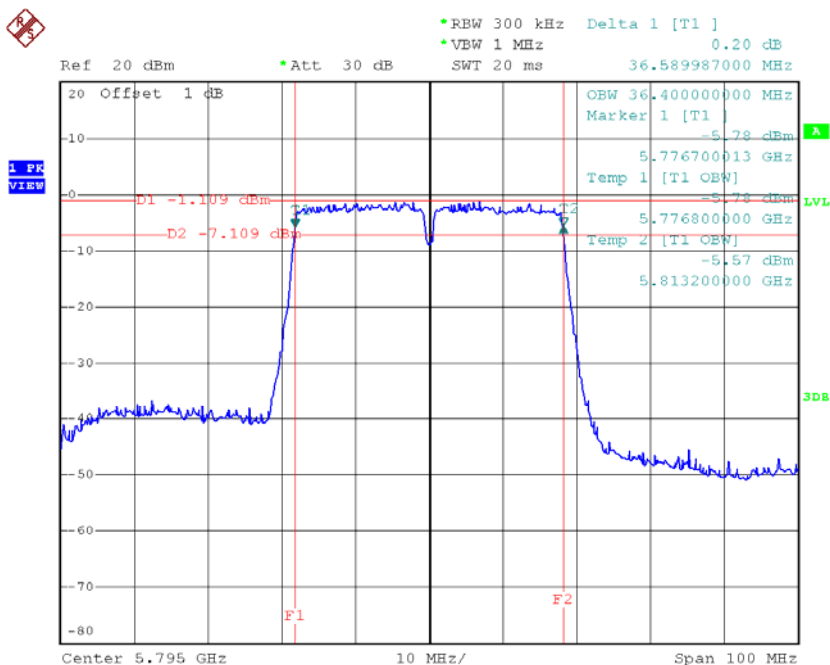


Date: 5.MAY.2015 17:23:34

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.05	18.30
CH40	5200	22.10	18.30
CH48	5240	22.15	18.50

TX CH36

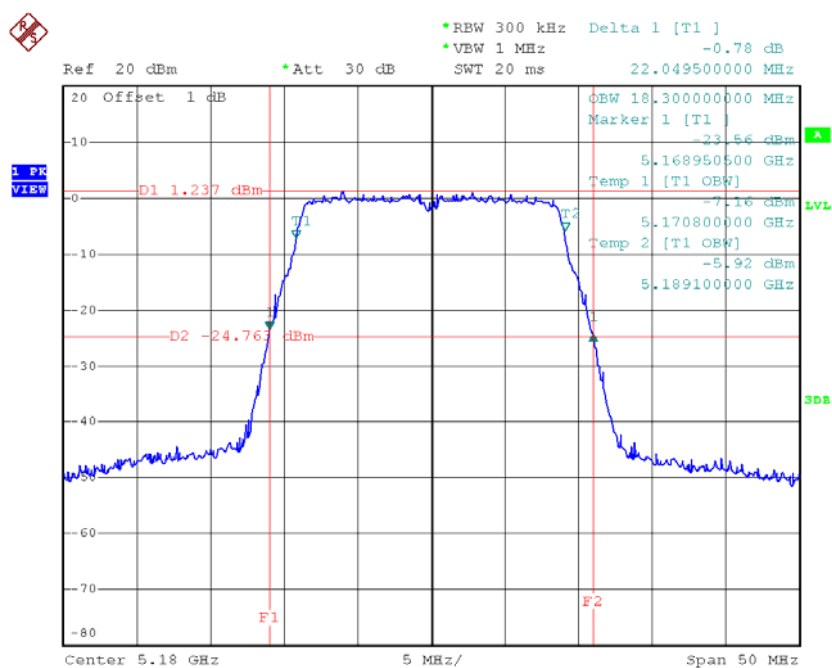


Date: 5.MAY.2015 16:07:56

TX CH40

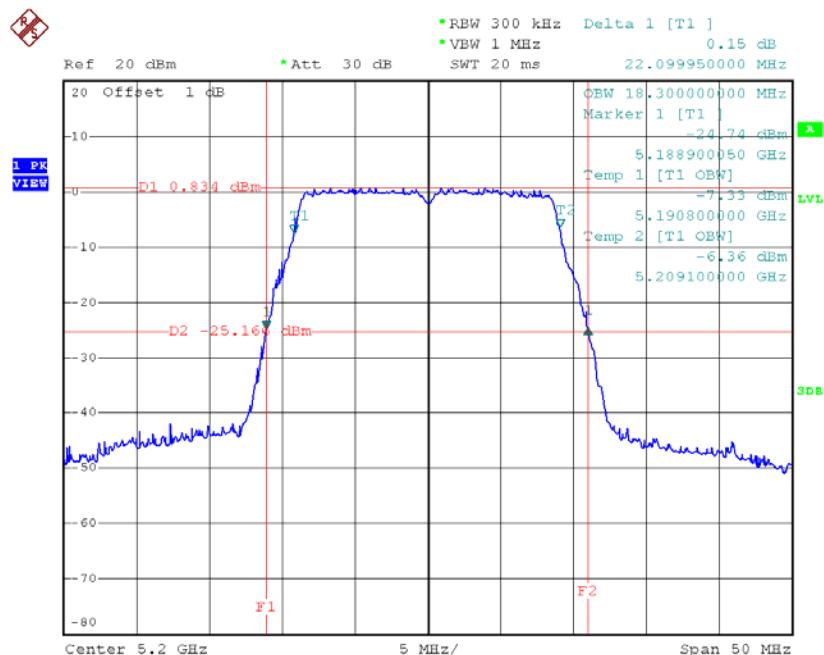

Date: 5.MAY.2015 16:09:13

TX CH48

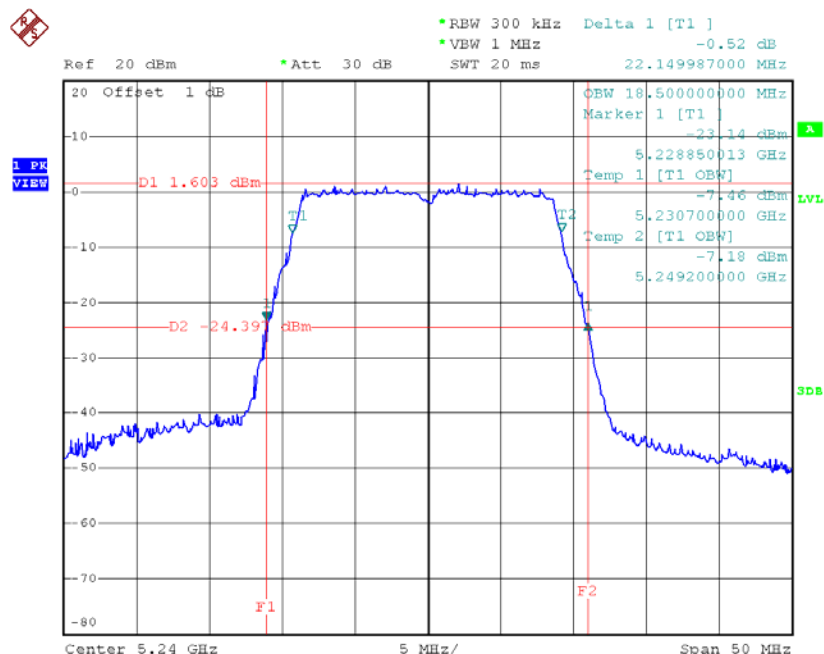


Date: 5.MAY.2015 16:10:07

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.01	36.40
CH46	5230	40.10	36.40

TX CH38

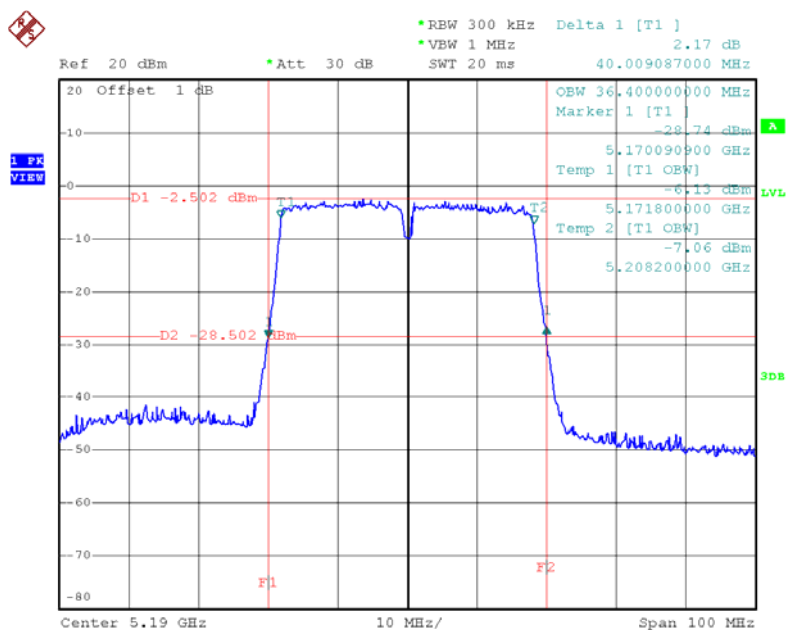

Date: 5.MAY.2015 16:13:29

TX CH46

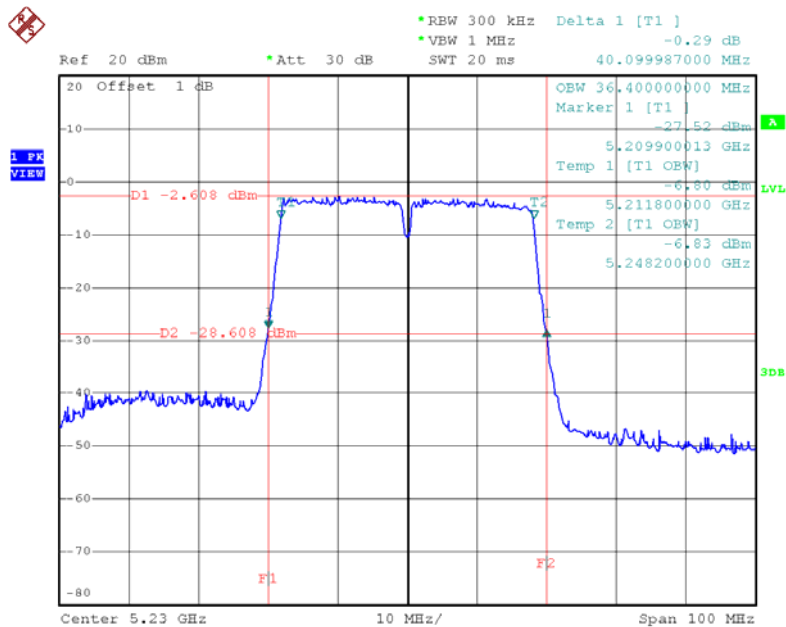


Date: 5.MAY.2015 16:14:38

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	81.00	76.00

TX CH42

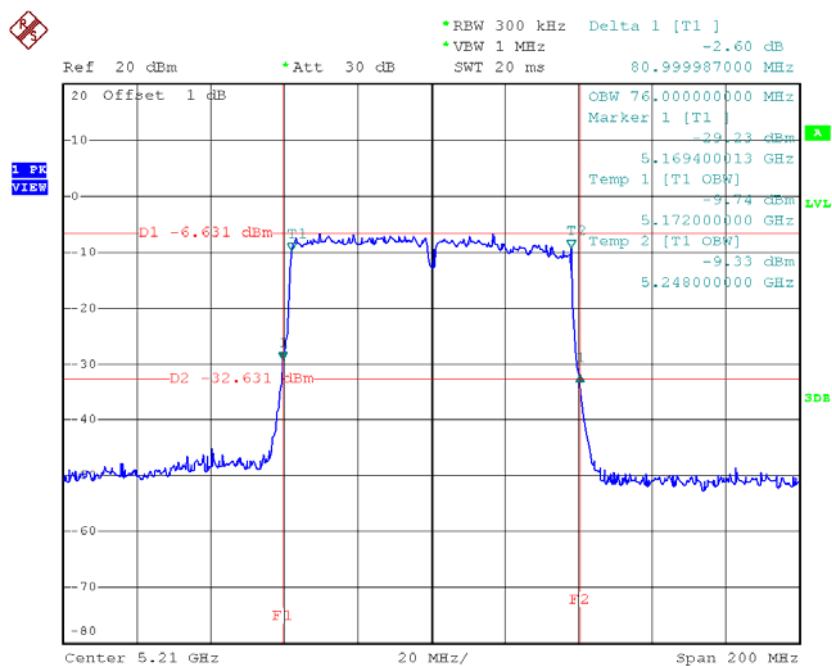


Date: 5.MAY.2015 16:15:49

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.05	18.30
CH60	5300	22.05	18.40
CH64	5320	22.19	18.40

TX CH52

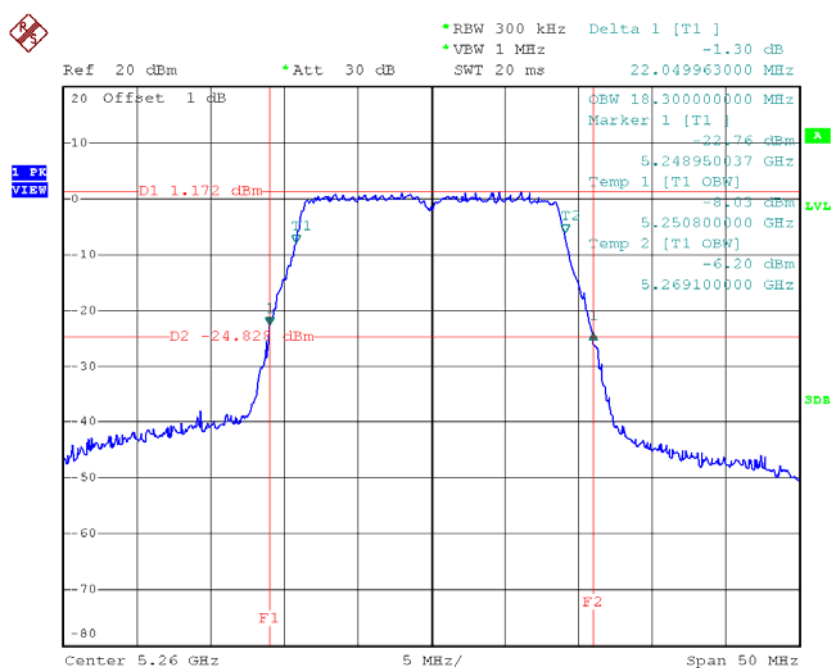


Date: 5.MAY.2015 16:25:59

TX CH60

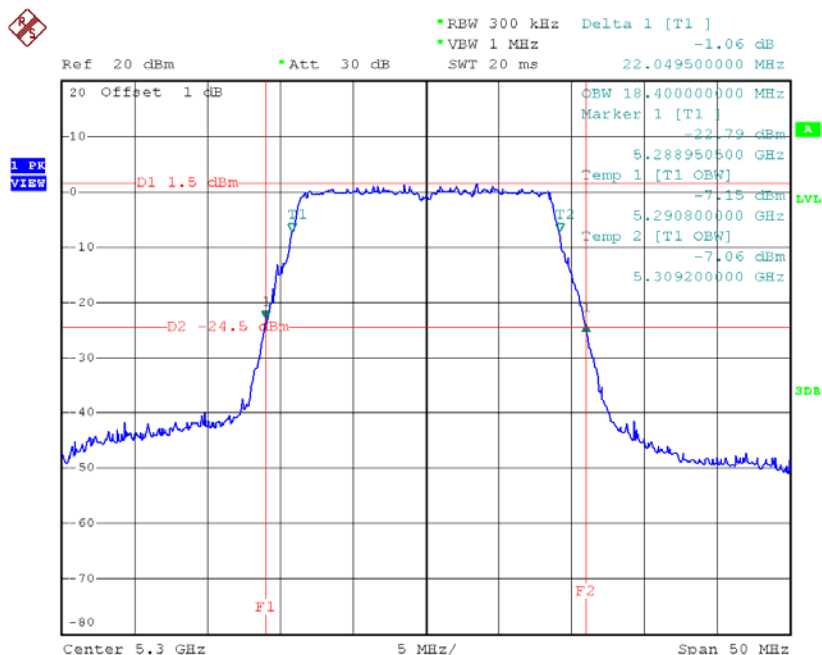

Date: 5.MAY.2015 16:27:17

TX CH64

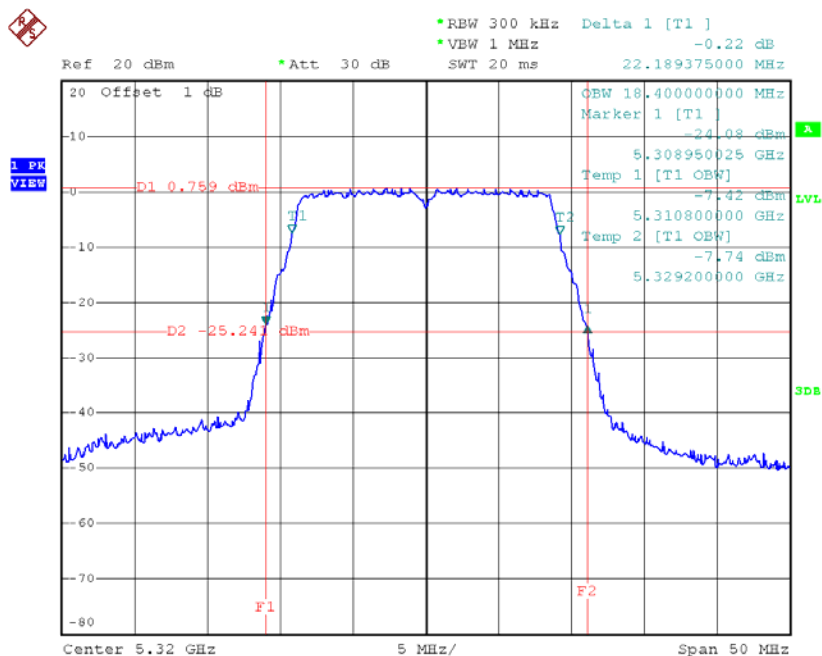


Date: 5.MAY.2015 16:27:52

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.10	36.40
CH62	5310	40.10	36.40

TX CH54

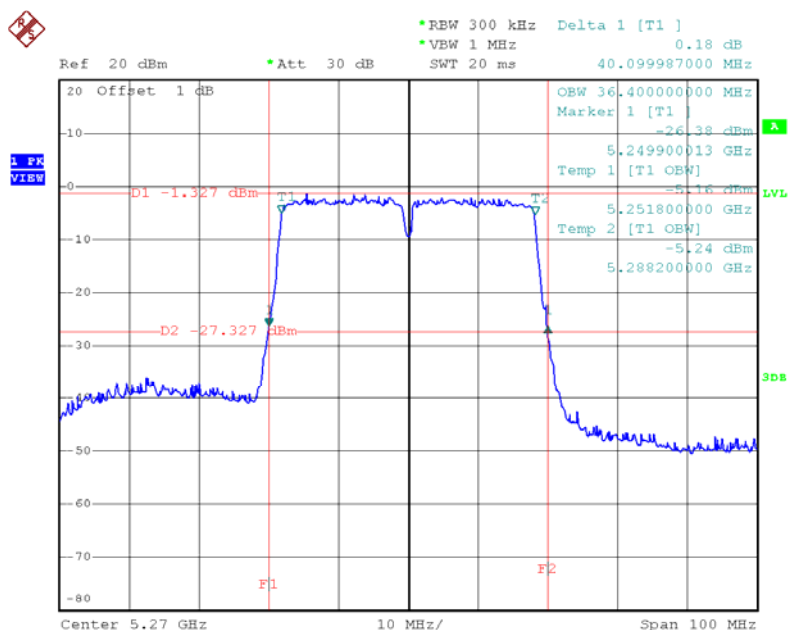

Date: 5.MAY.2015 16:31:39

TX CH62

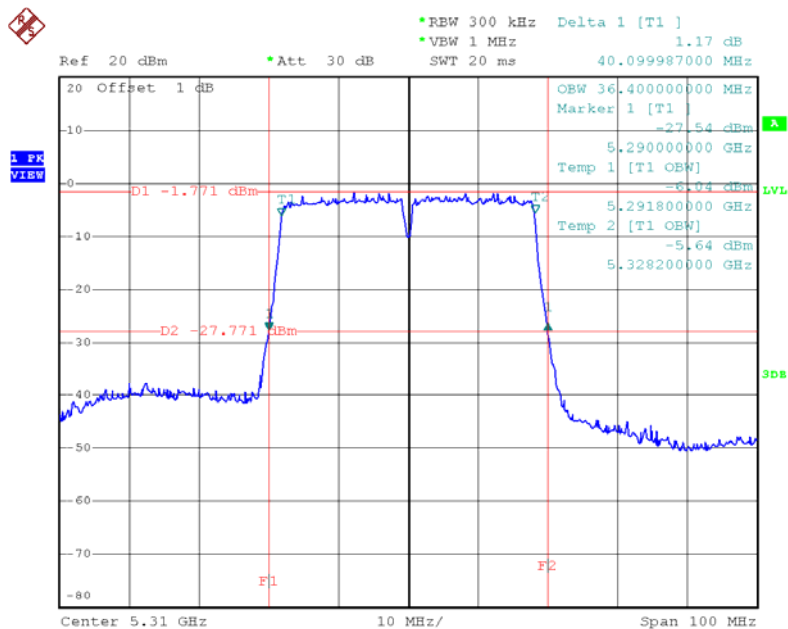


Date: 5.MAY.2015 16:32:45

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	81.40	76.00

TX CH58

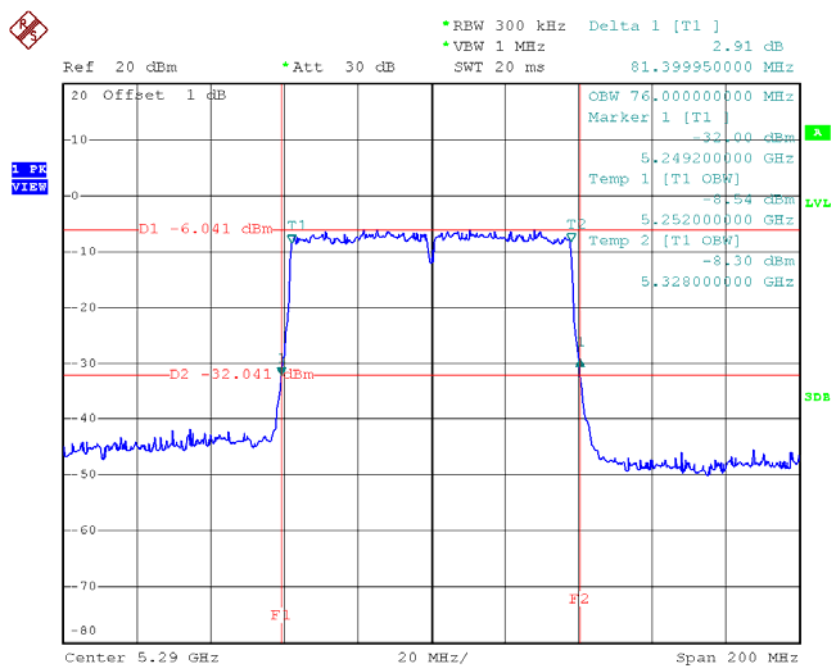


Date: 5.MAY.2015 16:34:54

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.05	18.30
CH116	5580	22.05	18.40
CH140	5700	22.20	18.40

TX CH100

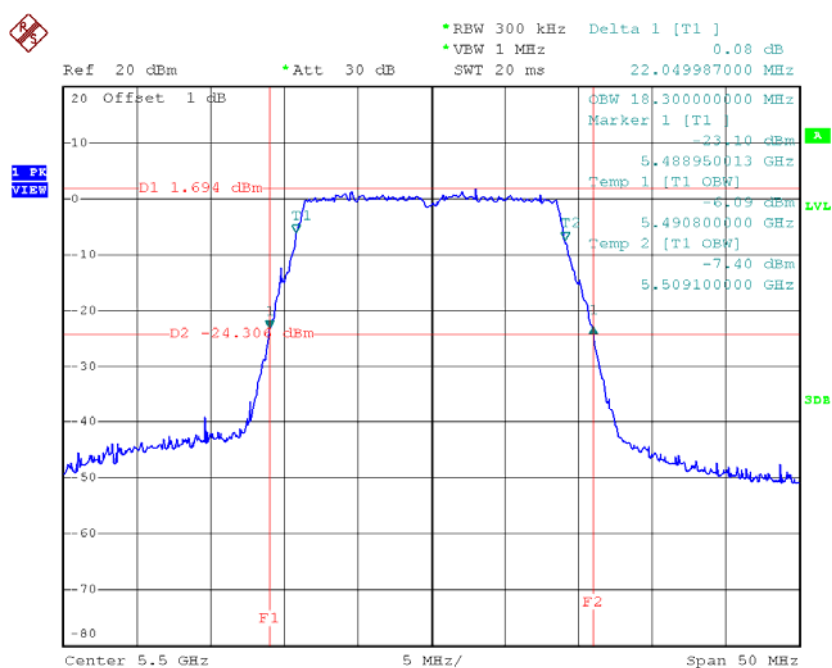


Date: 5.MAY.2015 16:53:46

TX CH116

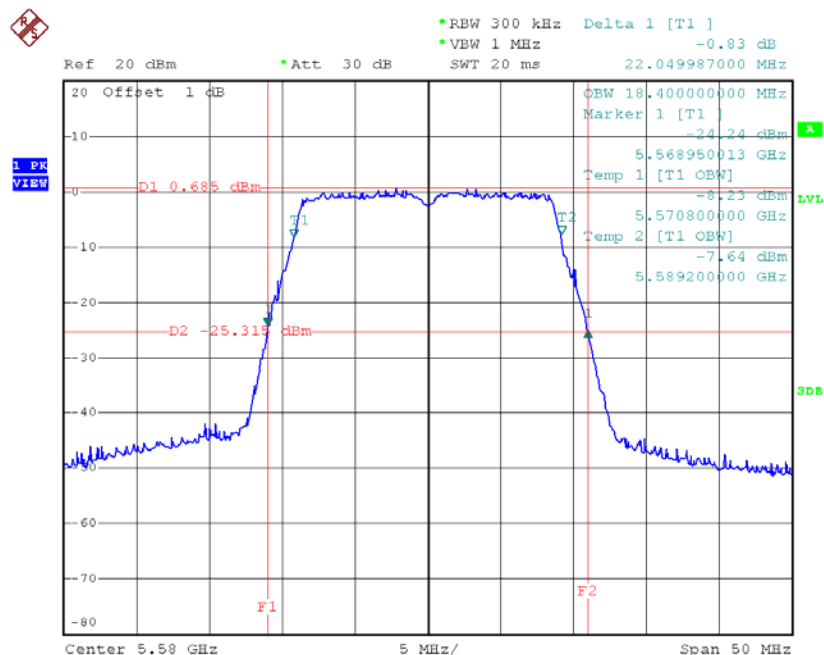

Date: 5.MAY.2015 16:55:08

TX CH140

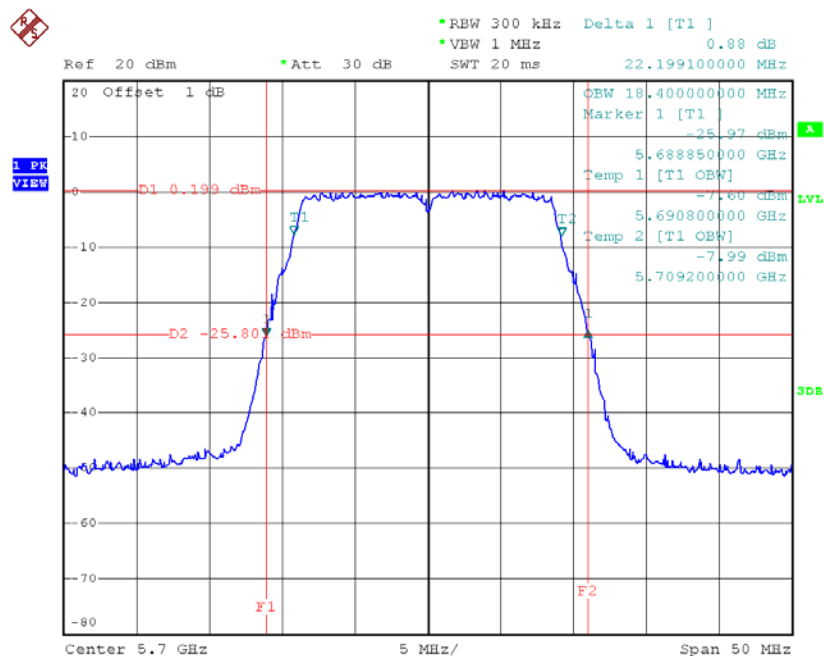


Date: 5.MAY.2015 16:56:14

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	40.00	36.40
CH110	5550	39.90	36.40
CH134	5670	40.21	36.40

TX CH102

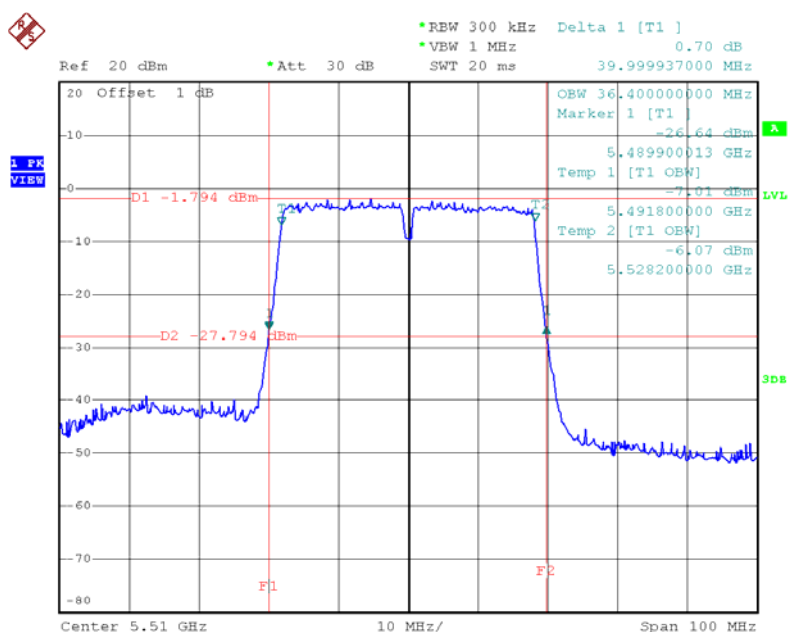


Date: 5.MAY.2015 17:01:28

TX CH110

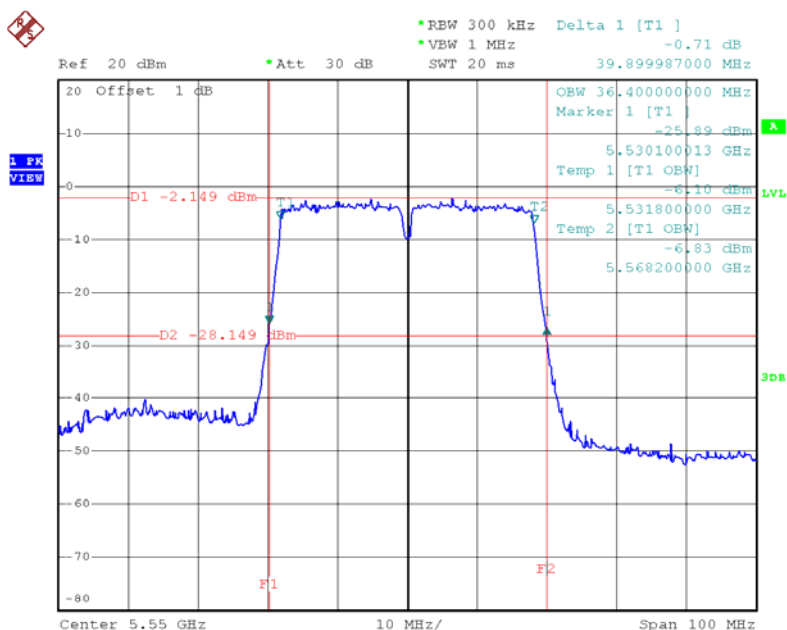

Date: 5.MAY.2015 17:02:43

TX CH134

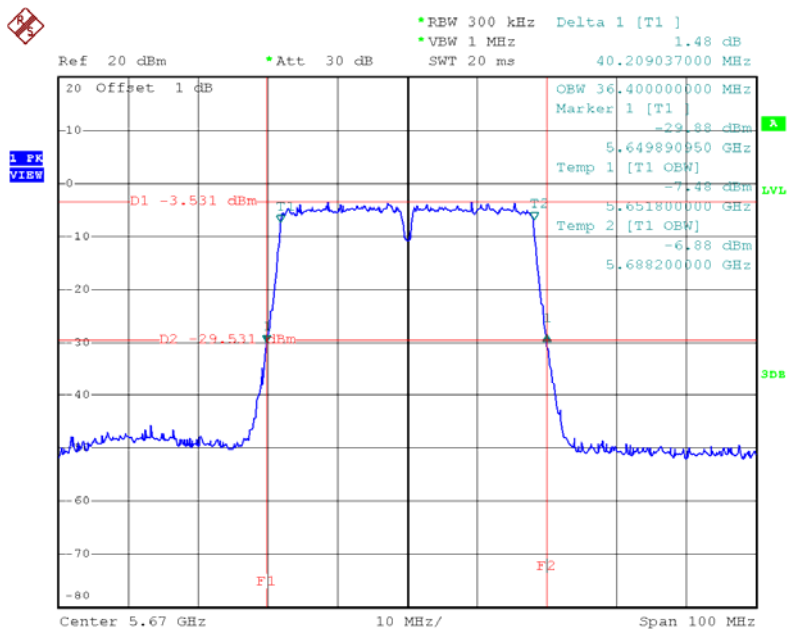


Date: 5.MAY.2015 17:03:27

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	81.20	76.00
CH122	5610	81.01	76.00

TX CH106

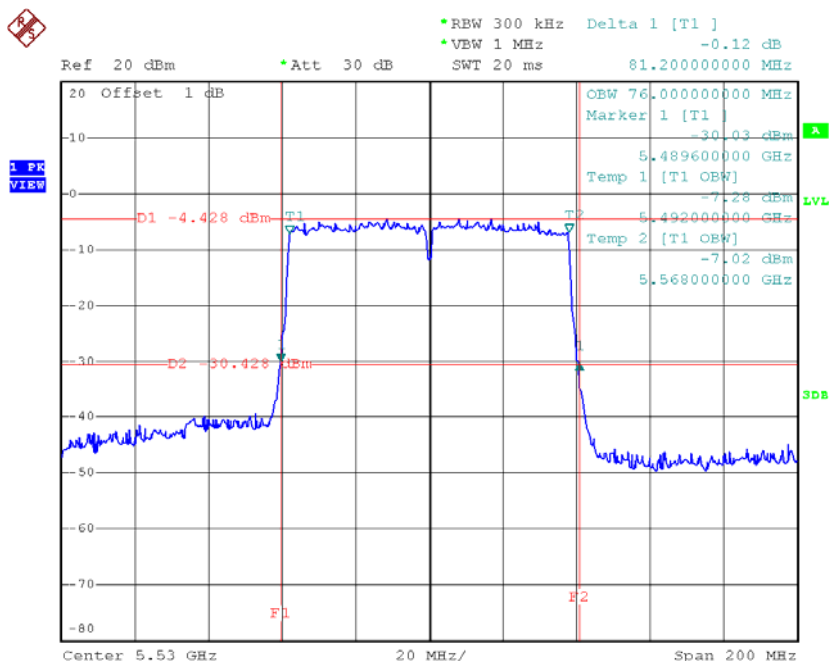

Date: 5.MAY.2015 17:04:32

TX CH122

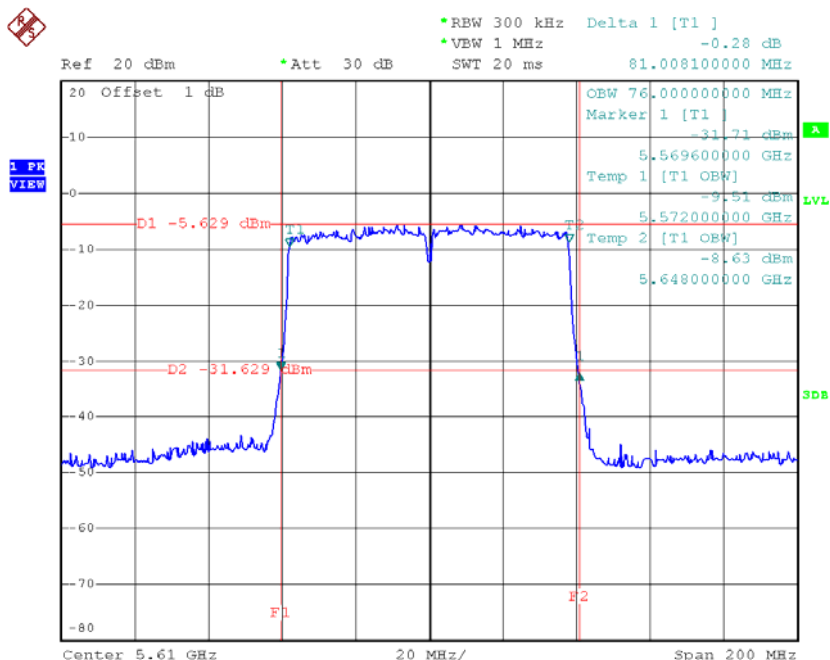


Date: 5.MAY.2015 17:05:45

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.85	18.40	>=500
CH157	5785	17.85	18.40	>=500
CH165	5825	17.80	18.40	>=500

TX CH 149

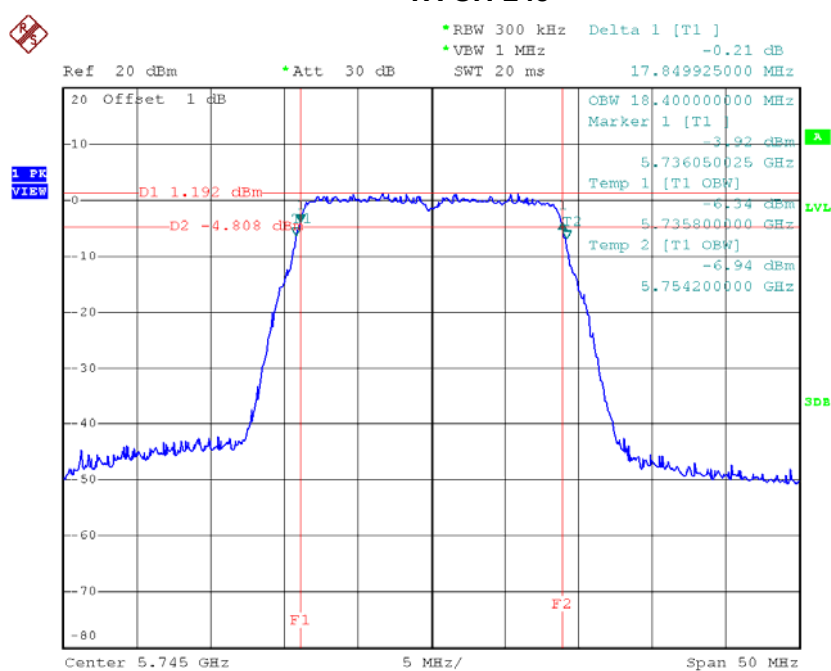


Date: 5.MAY.2015 17:19:34

TX CH 157

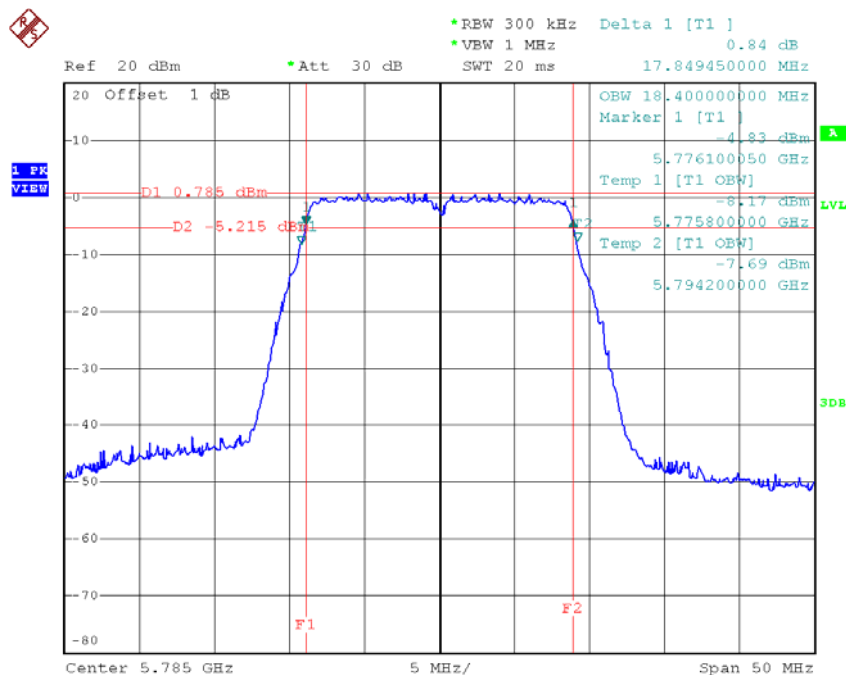

Date: 5.MAY.2015 17:20:55

TX CH 165

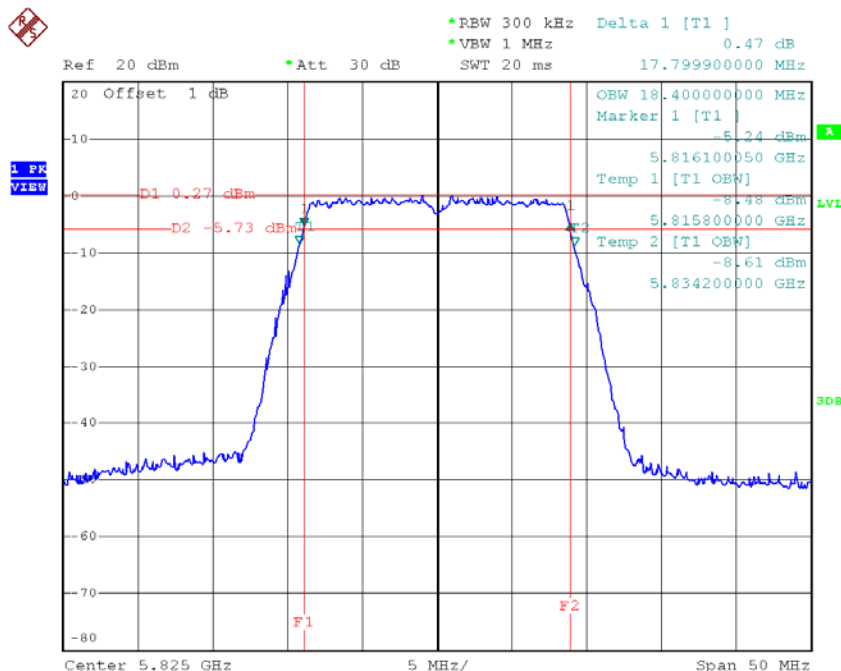


Date: 5.MAY.2015 17:21:37

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.70	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

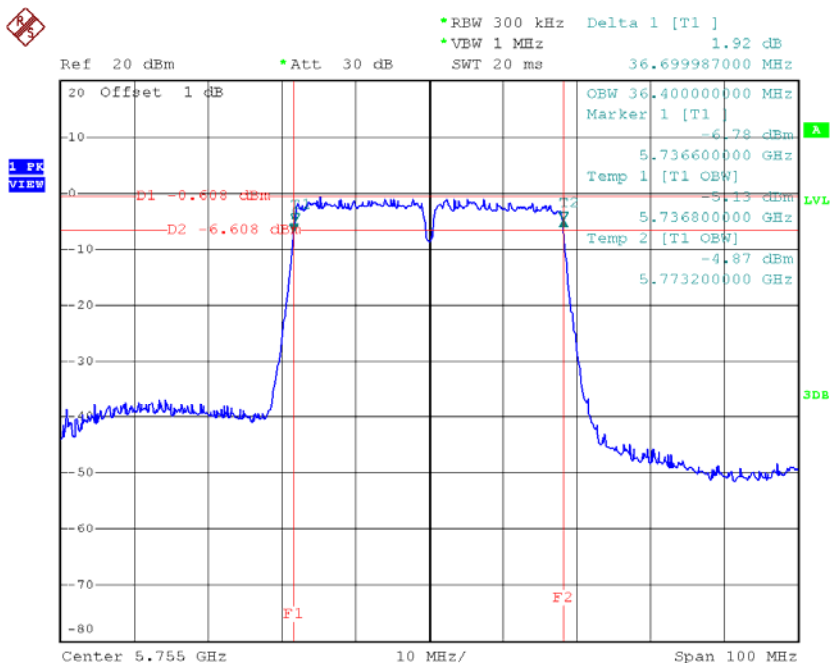

Date: 5.MAY.2015 17:24:28

TX CH 159

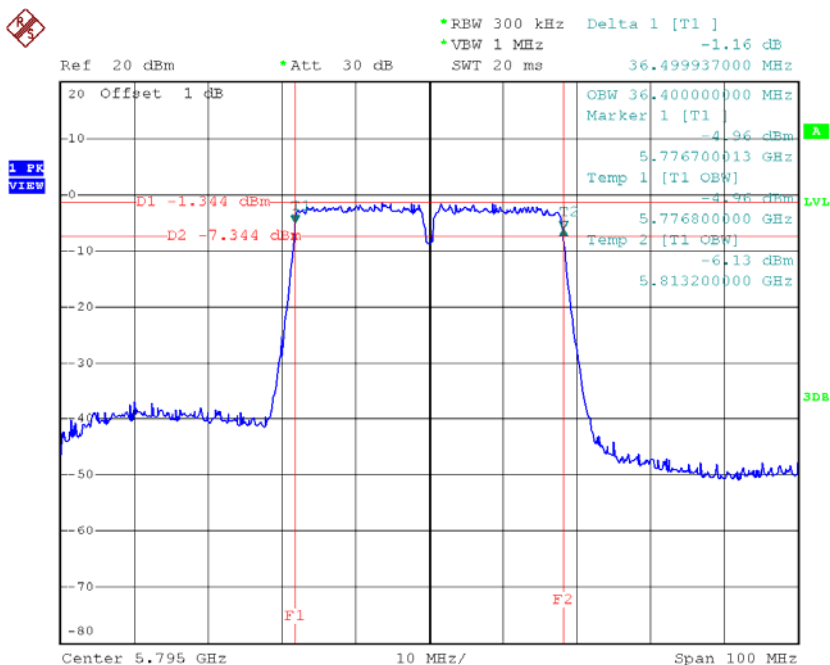


Date: 5.MAY.2015 17:25:40

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.60	76.00	>=500

TX CH 155

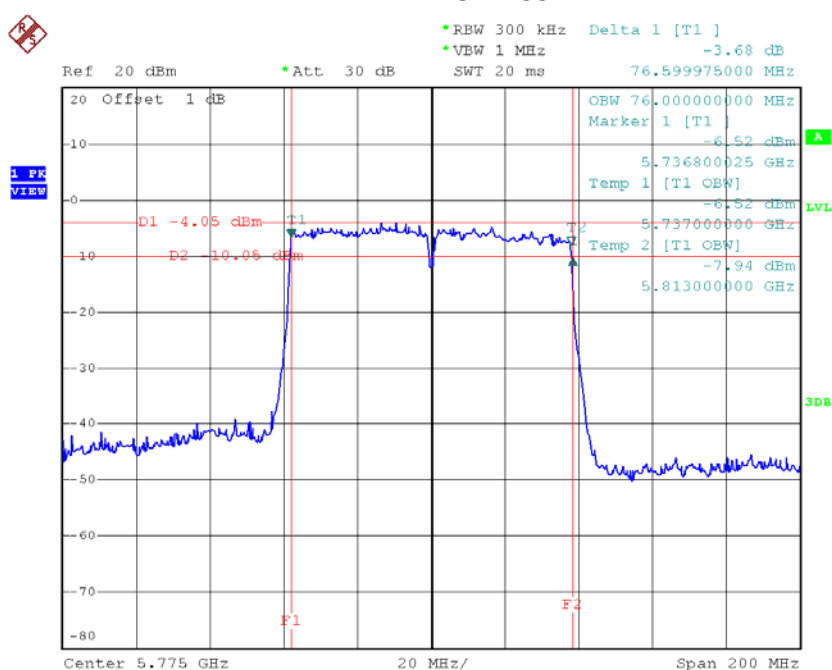

Date: 5.MAY.2015 17:26:45

ATTACHMENTF - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.71	0.08	10.79	24.00	0.25
CH40	5200	10.82	0.08	10.90	24.00	0.25
CH48	5240	10.76	0.08	10.84	24.00	0.25

Test Mode: UNII-1/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.67	0.07	10.74	24.00	0.25
CH40	5200	10.62	0.07	10.69	24.00	0.25
CH48	5240	10.65	0.07	10.72	24.00	0.25

Test Mode: UNII-1/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	10.29	0.30	10.59	24.00	0.25
CH46	5230	10.28	0.30	10.58	24.00	0.25

Test Mode: UNII-2A/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.62	0.08	10.70	24.00	0.25
CH60	5300	10.68	0.08	10.76	24.00	0.25
CH64	5320	10.69	0.08	10.77	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.28	0.07	10.35	24.00	0.25
CH60	5300	10.58	0.07	10.65	24.00	0.25
CH64	5320	10.43	0.07	10.50	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	10.02	0.30	10.32	24.00	0.25
CH62	5310	10.15	0.30	10.45	24.00	0.25

Test Mode: UNII-2C/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.43	0.08	10.51	24.00	0.25
CH116	5580	10.37	0.08	10.45	24.00	0.25
CH140	5700	10.31	0.08	10.39	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.41	0.07	10.48	24.00	0.25
CH116	5580	10.30	0.07	10.37	24.00	0.25
CH140	5700	10.21	0.07	10.28	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	10.51	0.30	10.81	24.00	0.25
CH110	5550	10.29	0.30	10.59	24.00	0.25
CH134	5670	9.57	0.30	9.87	24.00	0.25

Test Mode: UNII-3/ TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	10.30	0.08	10.38	30.00	1.00
CH157	5785	10.39	0.08	10.47	30.00	1.00
CH165	5825	10.52	0.08	10.60	30.00	1.00

Test Mode: UNII-3/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	10.29	0.07	10.36	30.00	1.00
CH157	5785	10.36	0.07	10.43	30.00	1.00
CH165	5825	10.63	0.07	10.70	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	10.29	0.30	10.59	30.00	1.00
CH159	5795	10.30	0.30	10.60	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.60	0.11	10.71	24.00	0.25
CH40	5200	10.61	0.11	10.72	24.00	0.25
CH48	5240	10.58	0.11	10.69	24.00	0.25

Test Mode: UNII-1/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	10.35	0.29	10.64	24.00	0.25
CH46	5230	10.54	0.29	10.83	24.00	0.25

Test Mode: UNII-1/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.64	0.66	10.30	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.51	0.11	10.62	24.00	0.25
CH60	5300	10.60	0.11	10.71	24.00	0.25
CH64	5320	10.38	0.11	10.49	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	10.05	0.29	10.34	24.00	0.25
CH62	5310	10.18	0.29	10.47	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.74	0.66	10.40	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.39	0.11	10.50	24.00	0.25
CH116	5580	10.16	0.11	10.27	24.00	0.25
CH140	5700	10.00	0.11	10.11	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	10.28	0.29	10.57	24.00	0.25
CH110	5550	10.33	0.29	10.62	24.00	0.25
CH134	5670	9.71	0.29	10.00	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.98	0.66	10.64	24.00	0.25
CH122	5610	10.12	0.66	10.78	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	10.32	0.11	10.43	30.00	1.00
CH157	5785	10.19	0.11	10.30	30.00	1.00
CH165	5825	9.78	0.11	9.89	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	10.22	0.29	10.51	30.00	1.00
CH159	5795	10.25	0.29	10.54	30.00	1.00


Test Mode: UNII-3/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	10.25	0.66	10.91	30.00	1.00

ATTACHMENTG - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode:	UNII-1/TX A Mode
------------	------------------

TX mode CH36

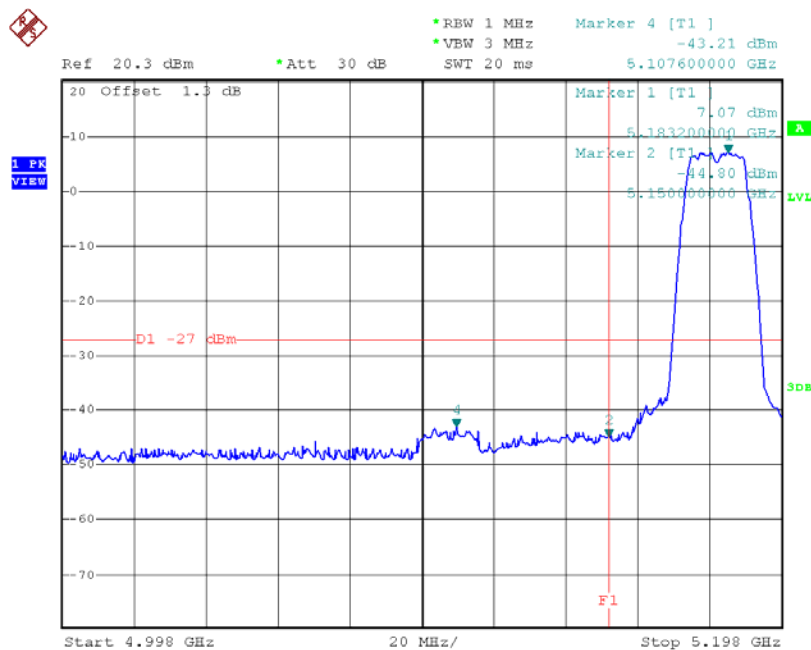

Date: 5.MAY.2015 15:58:49


TX mode CH48

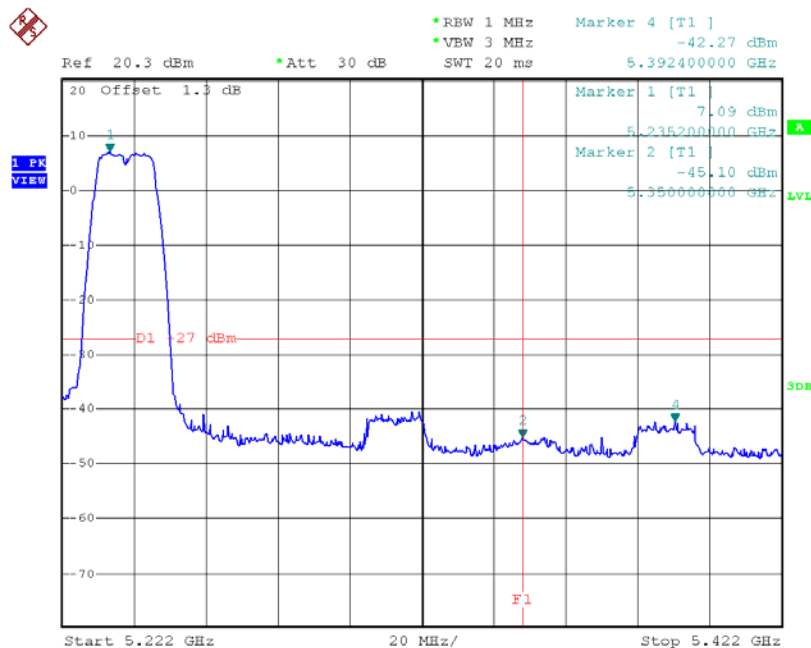

Date: 5.MAY.2015 16:02:39


Test Mode:	UNII-1/TX N20 Mode
------------	--------------------

TX mode CH36

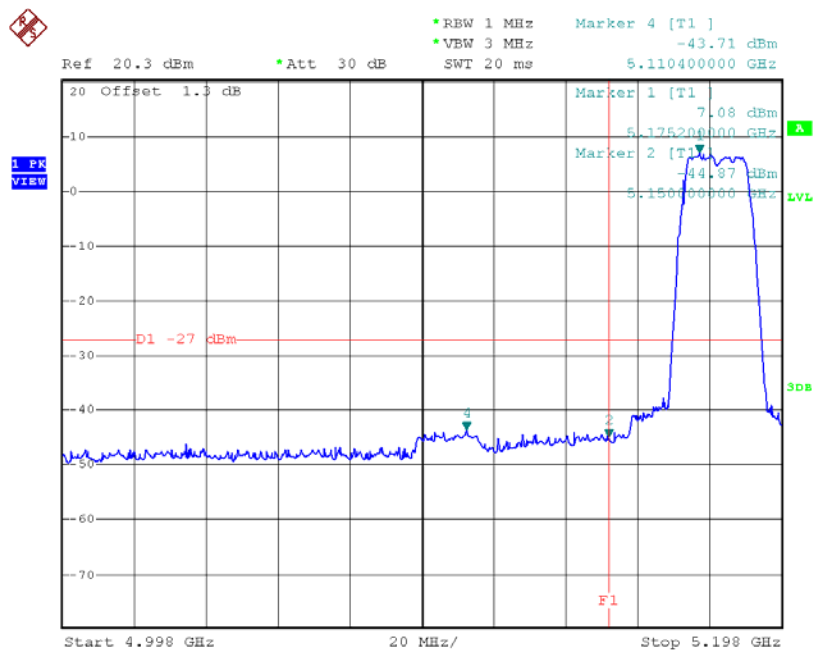

Date: 5.MAY.2015 16:04:32


TX mode CH48

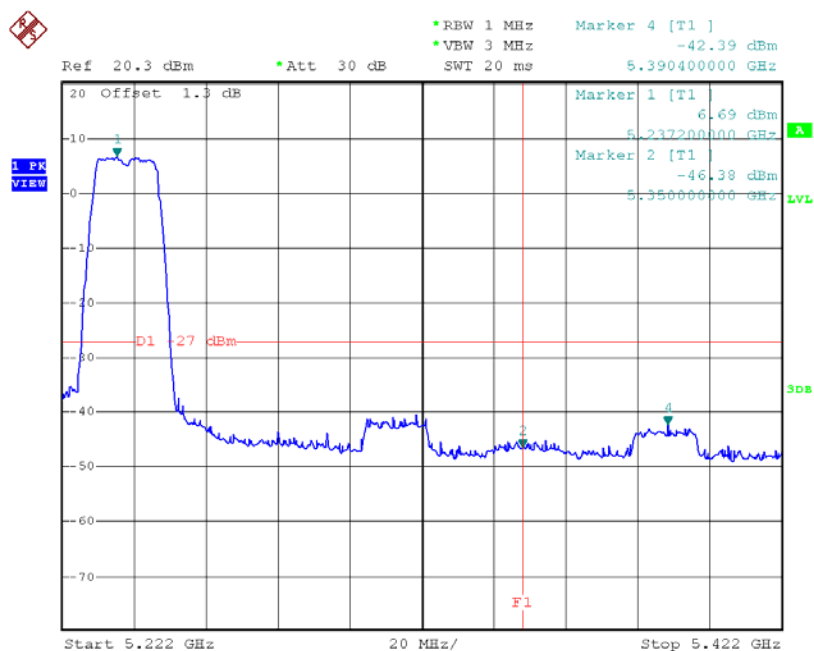

Date: 5.MAY.2015 16:07:10


Test Mode: UNII-1/TX N40 Mode

TX mode CH38

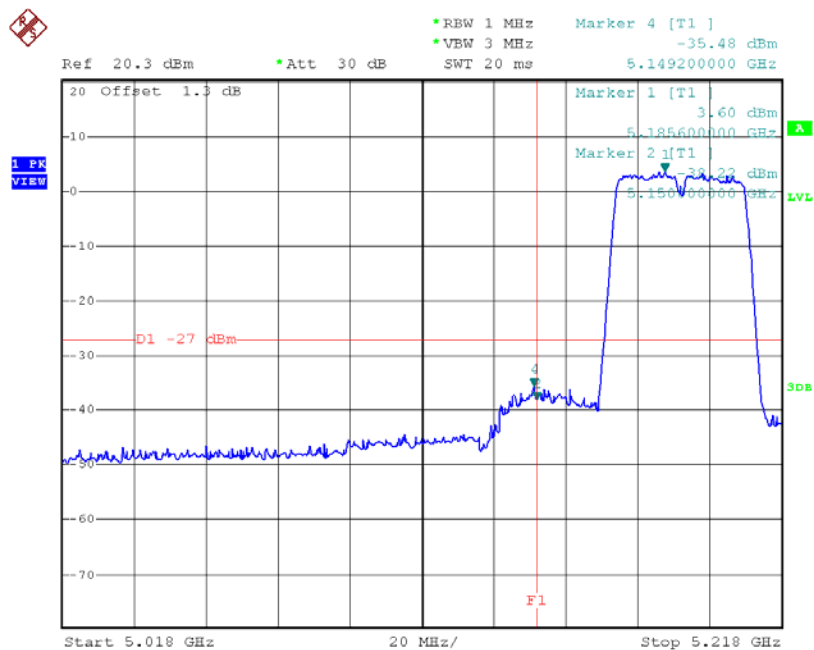

Date: 5.MAY.2015 16:11:28


TX mode CH46

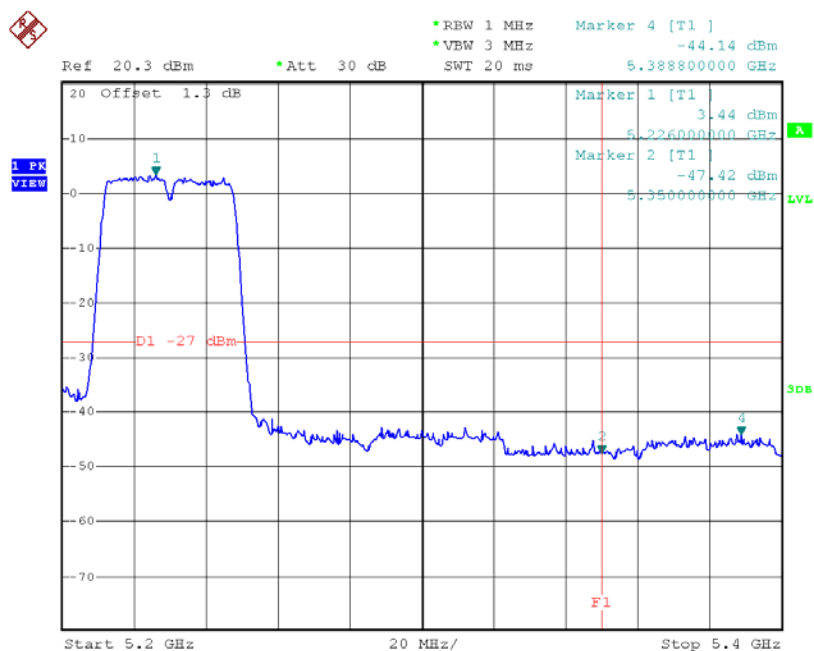

Date: 5.MAY.2015 16:12:50


Test Mode:	UNII-2A/TX A Mode
------------	-------------------

TX mode CH52

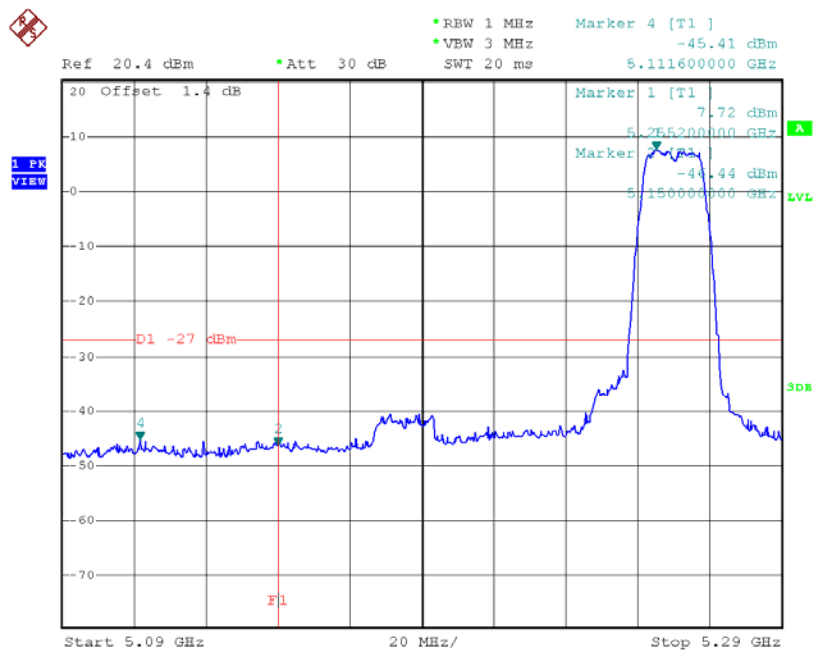

Date: 5.MAY.2015 16:18:52


TX mode CH64

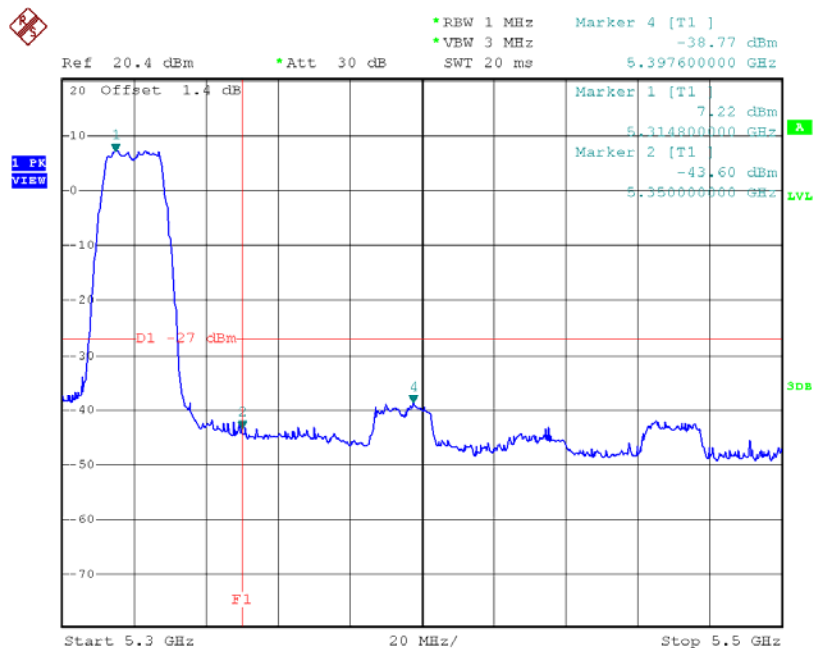

Date: 5.MAY.2015 16:21:47


Test Mode:	UNII-2A/TX N20 Mode
------------	---------------------

TX mode CH52

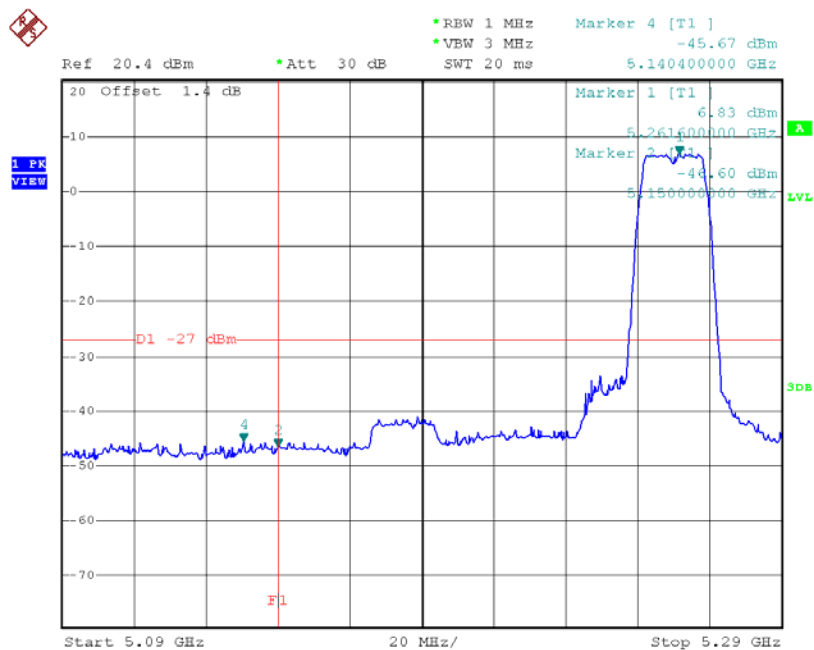

Date: 5.MAY.2015 16:23:42


TX mode CH64

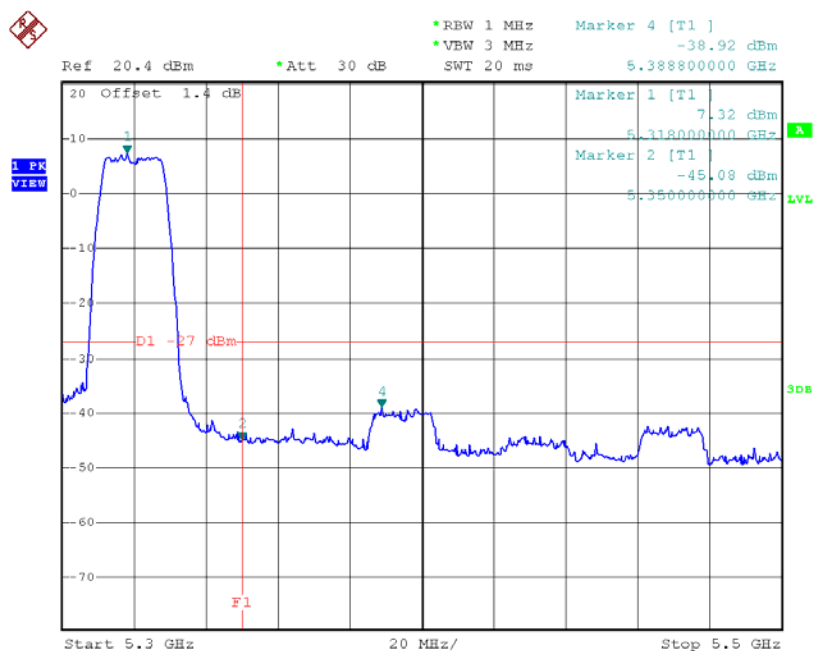

Date: 5.MAY.2015 16:25:22


Test Mode:	UNII-2A/TX N40 Mode
------------	---------------------

TX mode CH54

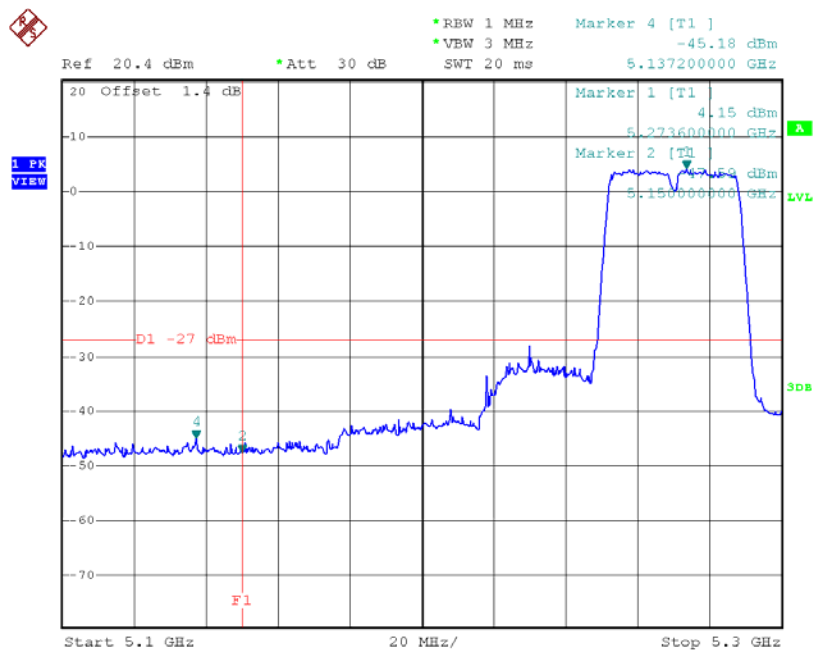

Date: 5.MAY.2015 16:30:00


TX mode CH62

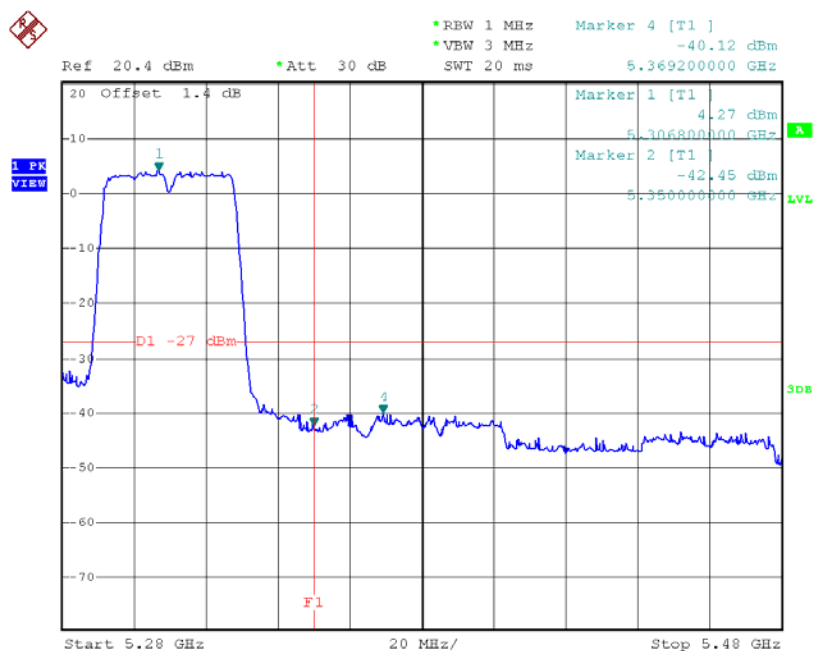

Date: 5.MAY.2015 16:31:03


Test Mode:	UNII-2C/TX A Mode
------------	-------------------

TX mode CH100

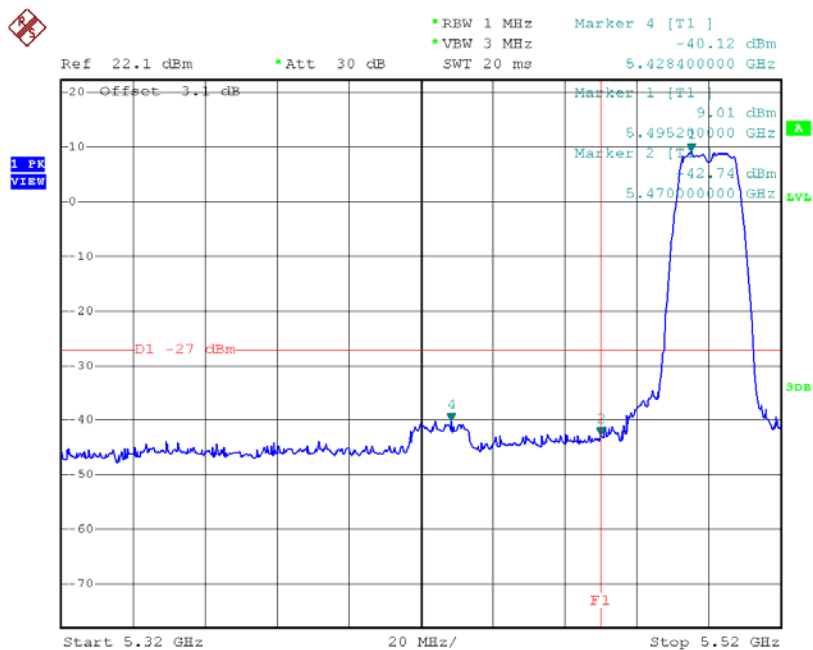

Date: 5.MAY.2015 16:46:12


TX mode CH140

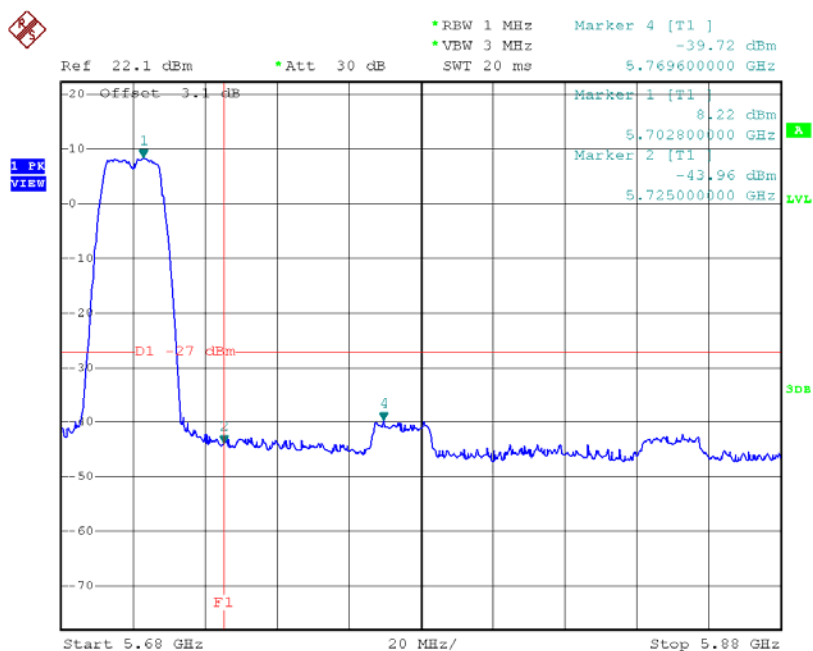

Date: 5.MAY.2015 16:49:40


Test Mode:	UNII-2C/TX N20 Mode
------------	---------------------

TX mode CH100

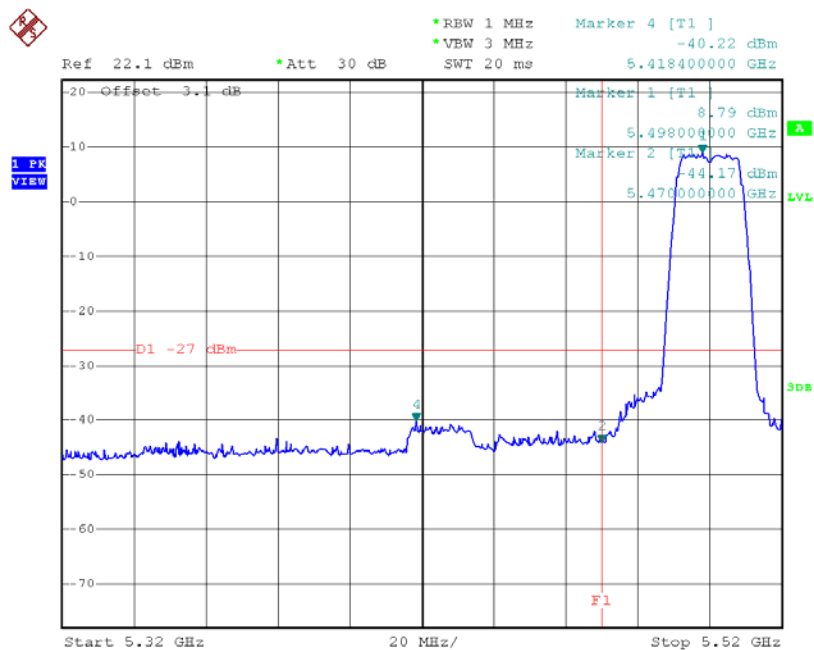

Date: 5.MAY.2015 16:51:17


TX mode CH140

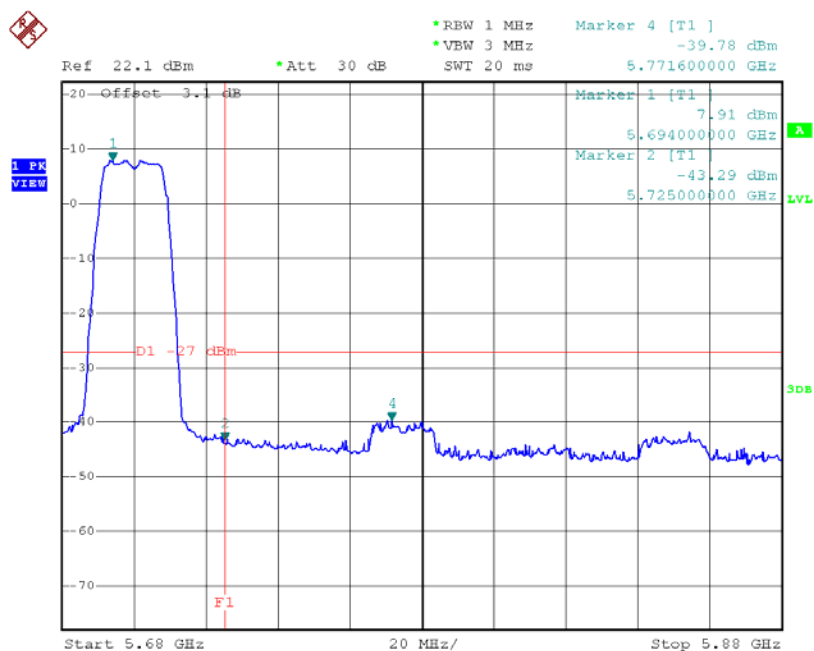

Date: 5.MAY.2015 16:52:45


Test Mode:	UNII-2C/TX N40 Mode
------------	---------------------

TX mode CH102

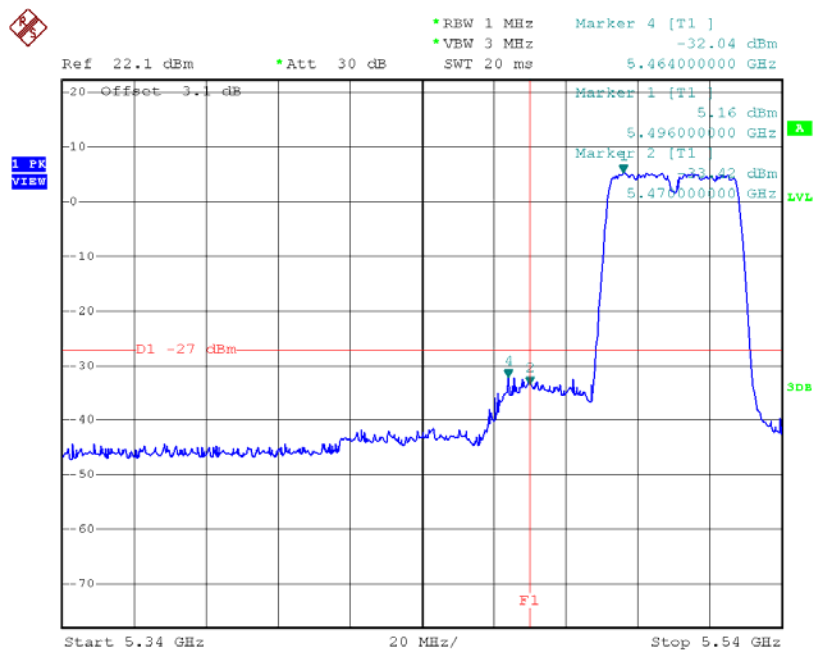

Date: 5.MAY.2015 16:57:46


TX mode CH134

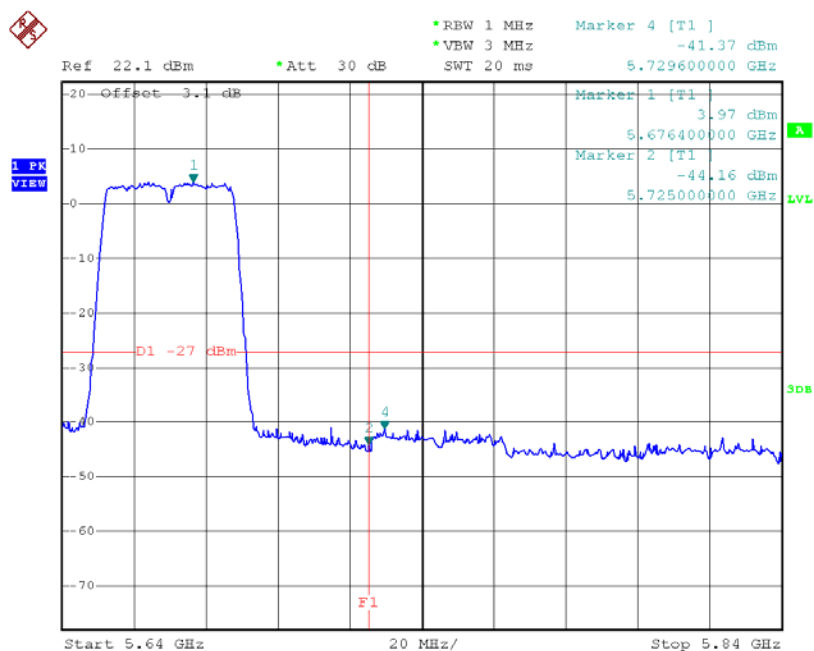

Date: 5.MAY.2015 17:00:27


Test Mode: UNII-3/TX A Mode

TX A Mode CH149

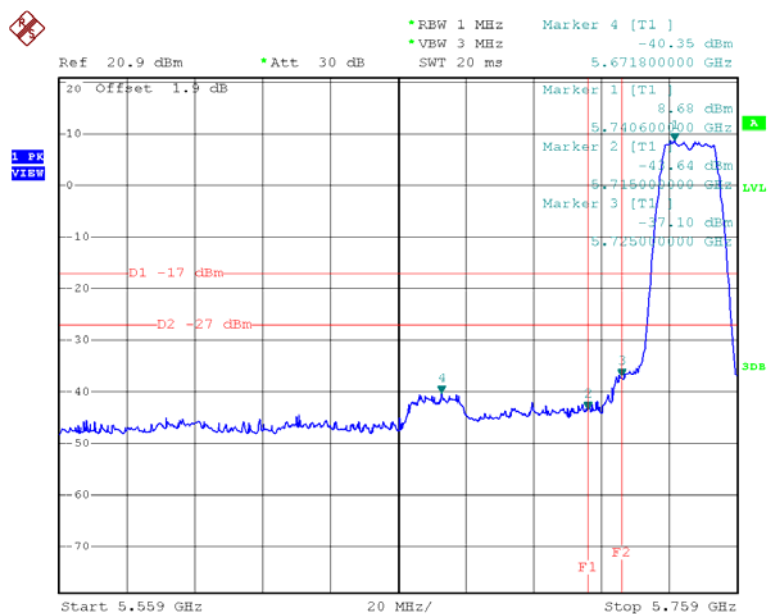

Date: 5.MAY.2015 17:10:08


TX A Mode CH165

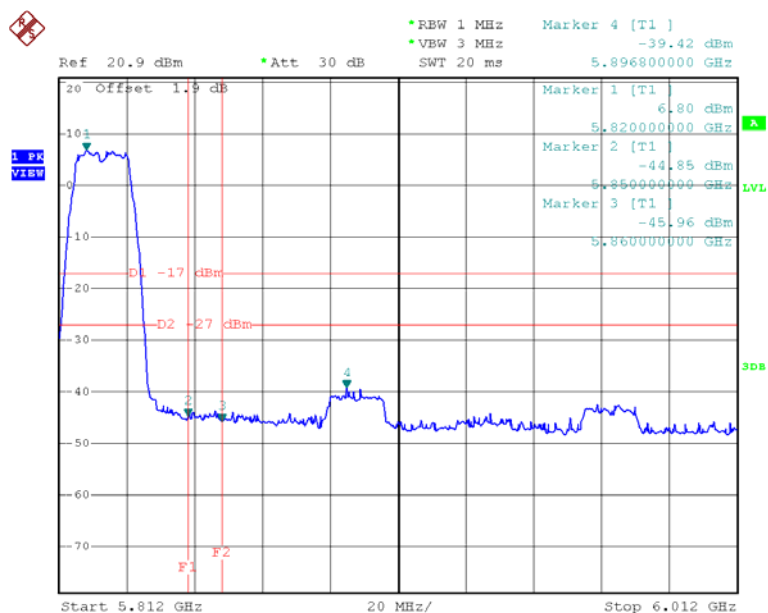

Date: 5.MAY.2015 17:14:20


Test Mode: UNII-3/TX N20 Mode

TX HT20 mode CH149

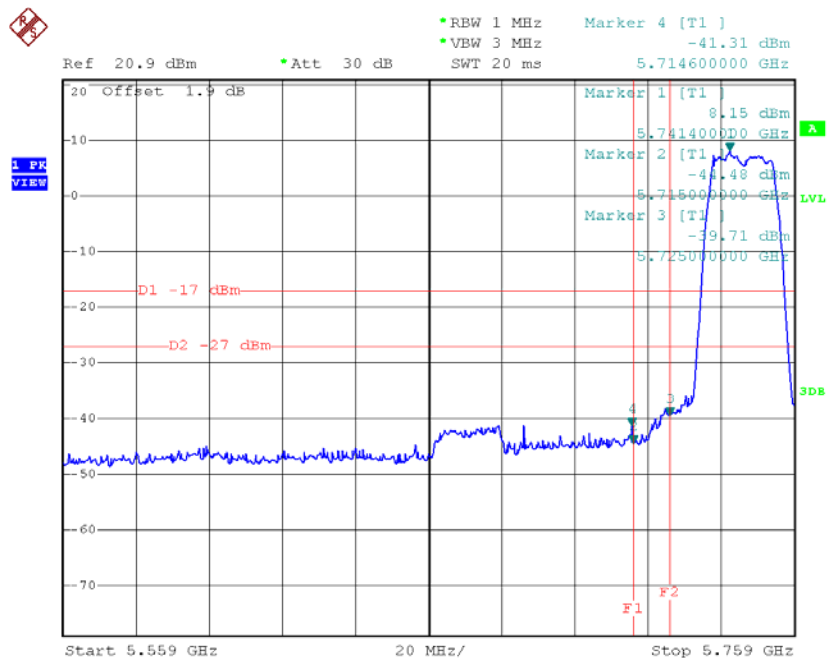

Date: 5.MAY.2015 17:15:34


TX HT20 mode CH165

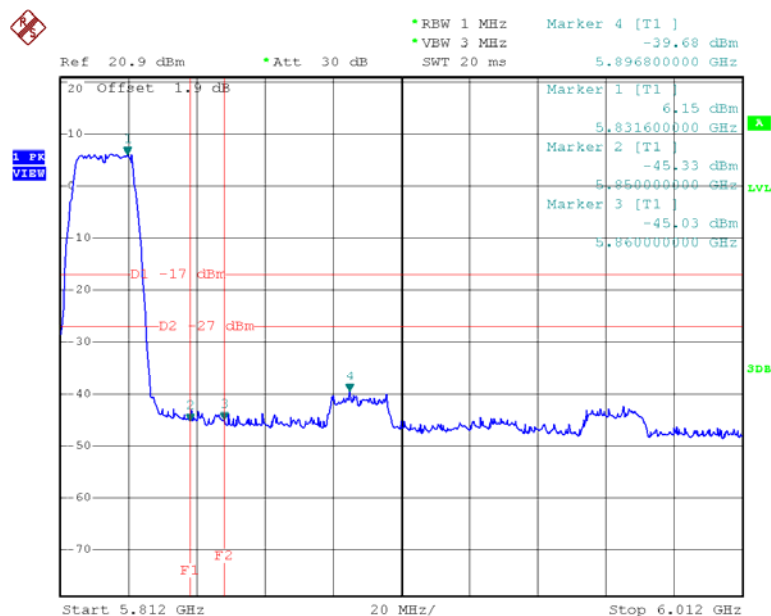

Date: 5.MAY.2015 17:17:37


Test Mode: UNII-3/TX N40 Mode

UNII-3/TX HT40 mode CH151

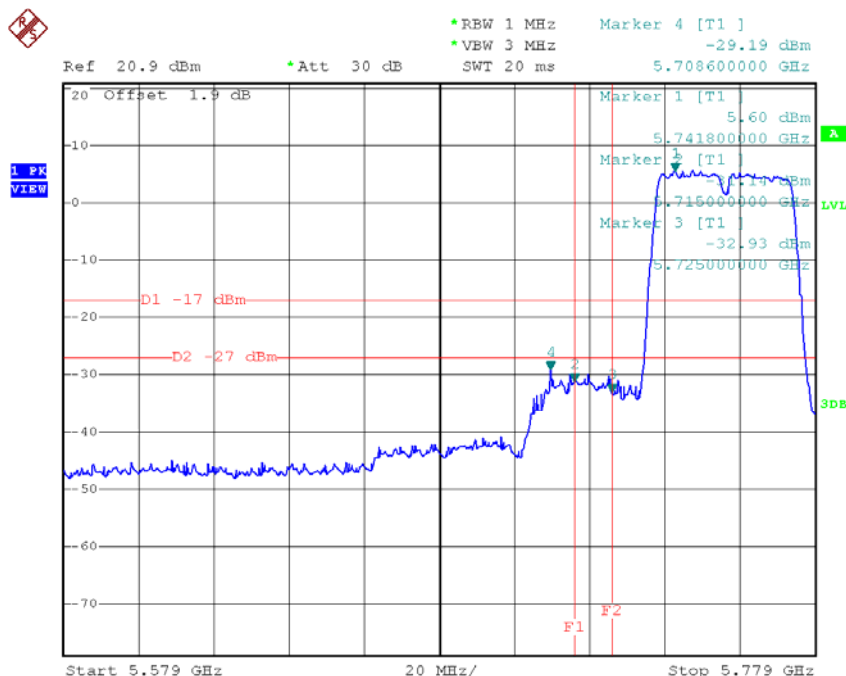

Date: 5.MAY.2015 17:22:44


UNII-3/TX HT40 mode CH159

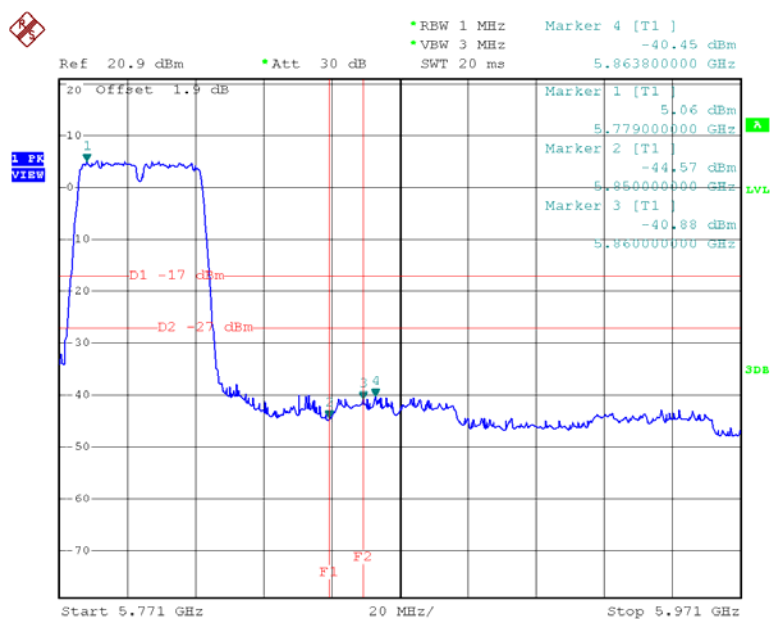

Date: 5.MAY.2015 17:23:51


Test Mode:	UNII-1/TX AC20 Mode
------------	---------------------

TX mode CH36

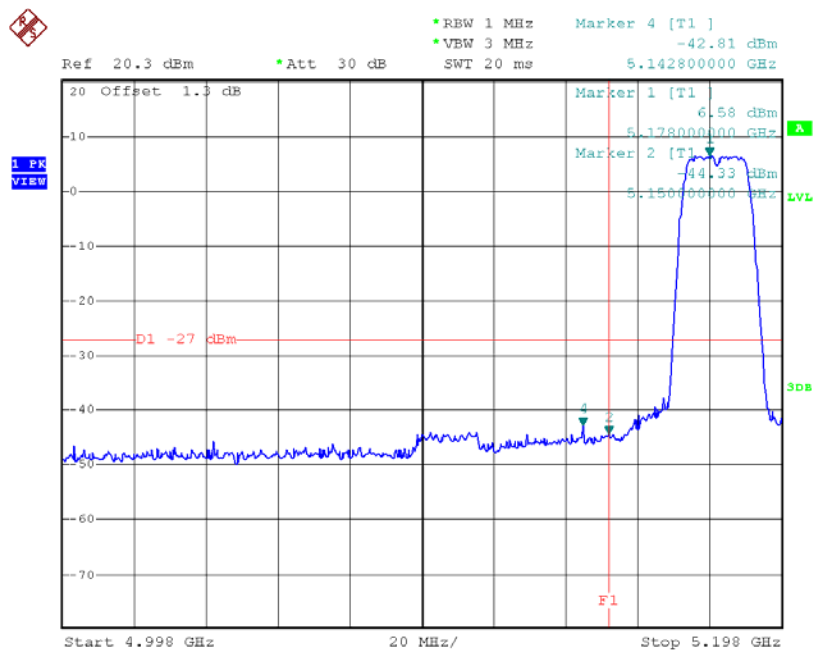

Date: 5.MAY.2015 16:08:13


TX mode CH48

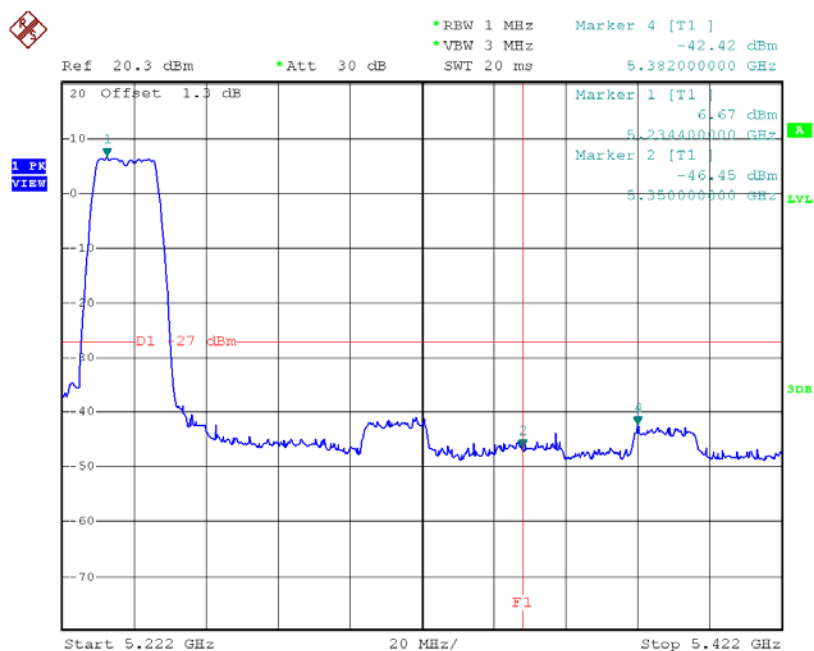

Date: 5.MAY.2015 16:10:24


Test Mode:	UNII-1/TX AC40 Mode
------------	---------------------

TX mode CH38

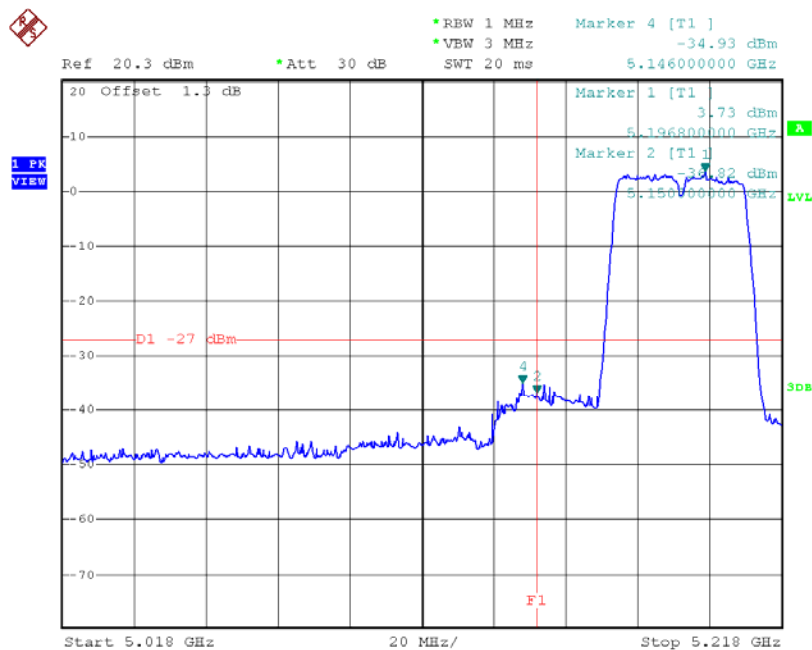

Date: 5.MAY.2015 16:13:46


TX mode CH46

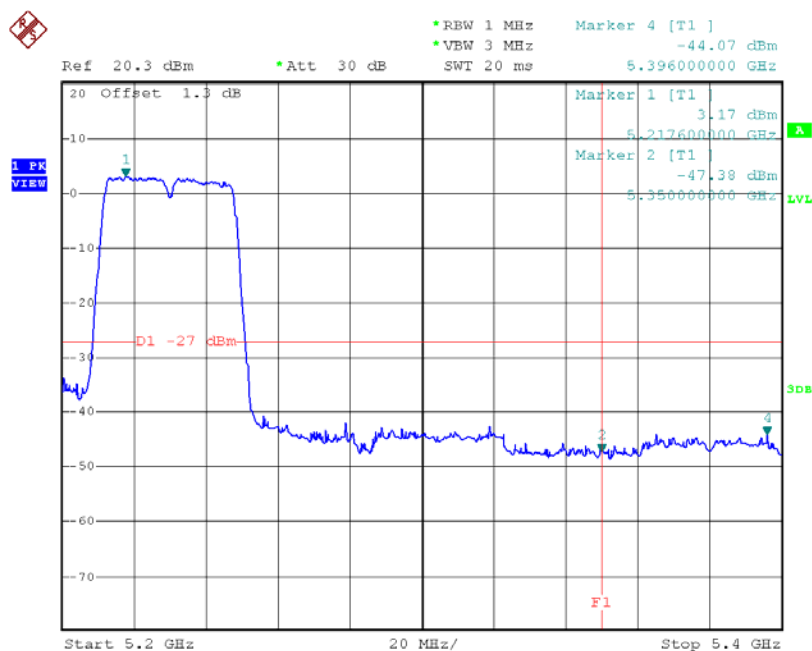


Date: 5.MAY.2015 16:14:55

Test Mode:	UNII-1/TX AC80 Mode
------------	---------------------

TX mode CH42

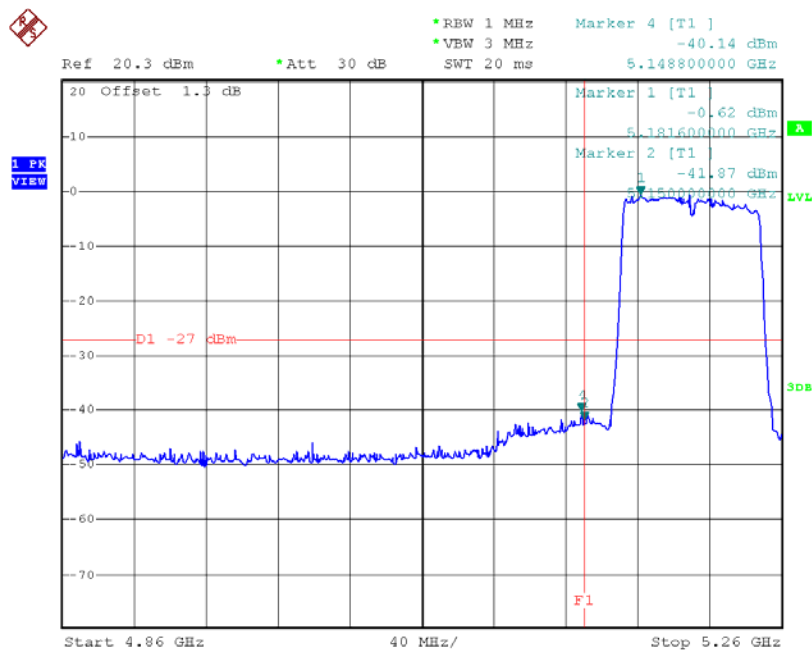


Date: 5.MAY.2015 16:16:20

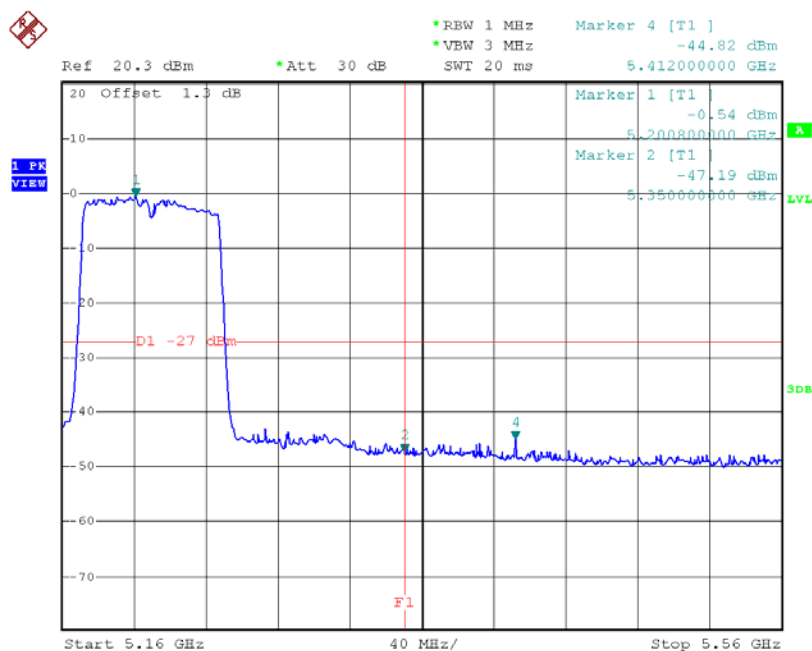

Date: 5.MAY.2015 16:16:28


Test Mode:	UNII-2A/TX AC20 Mode
------------	----------------------

TX mode CH52

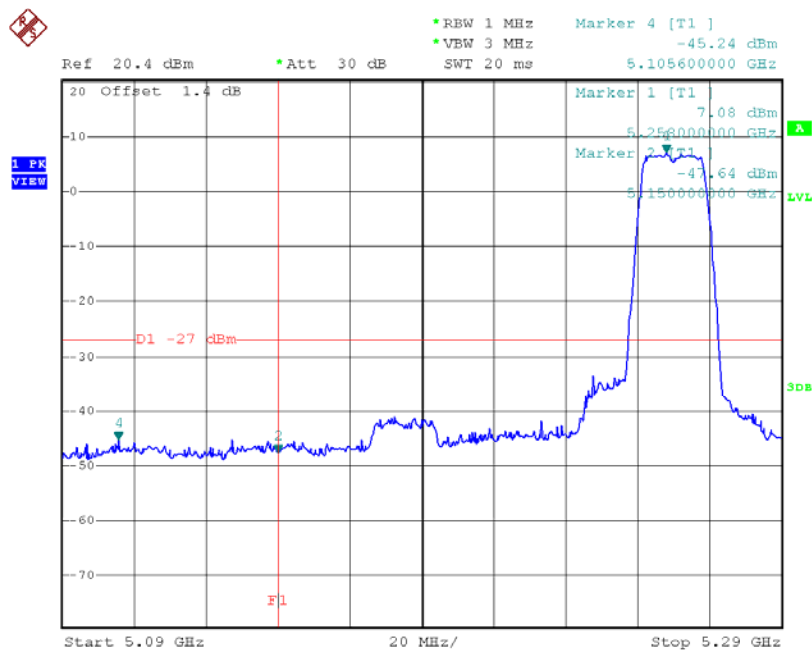

Date: 5.MAY.2015 16:26:42


TX mode CH64

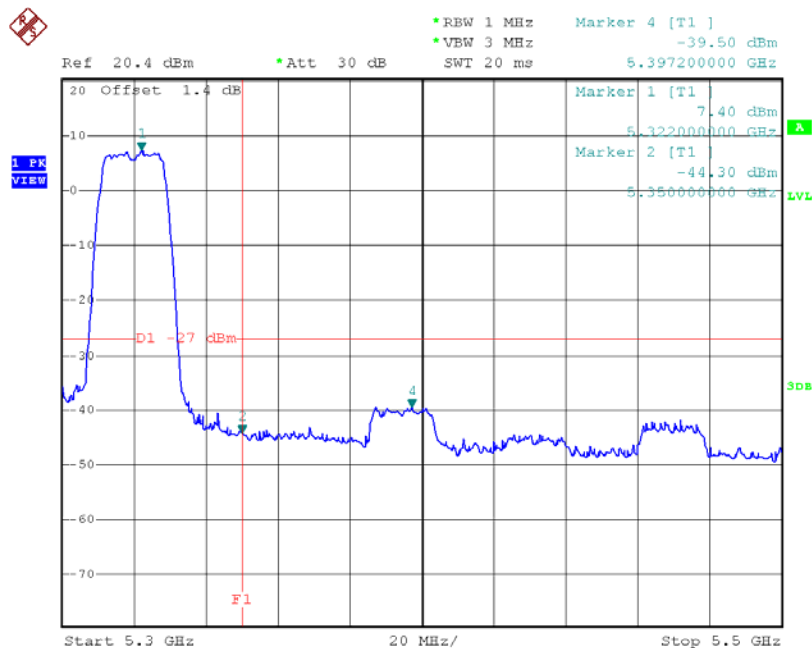

Date: 5.MAY.2015 16:28:09


Test Mode: UNII-2A/TX AC40 Mode

TX mode CH54

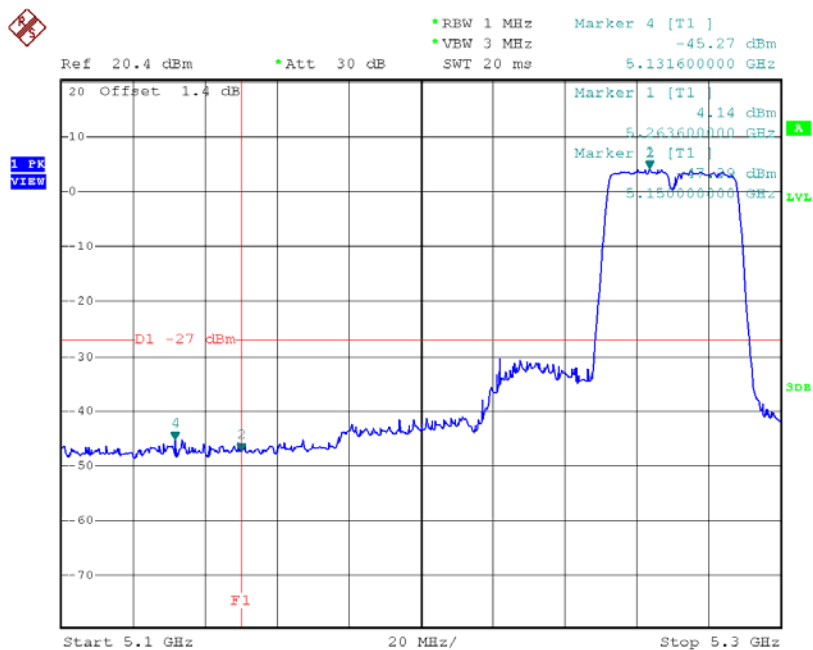

Date: 5.MAY.2015 16:32:10


TX mode CH62

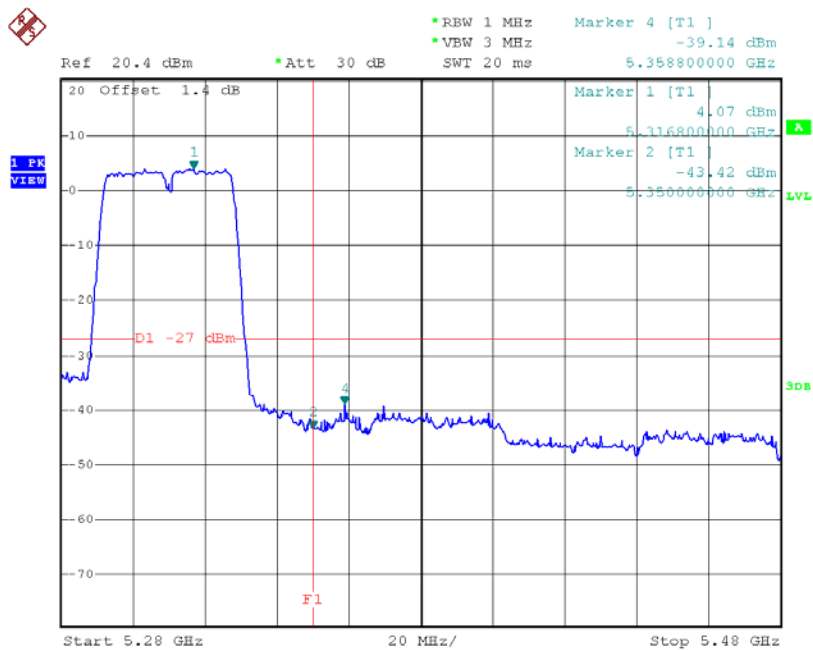


Date: 5.MAY.2015 16:33:02

Test Mode:	UNII-2A/TX AC80 Mode
------------	----------------------

TX mode CH58

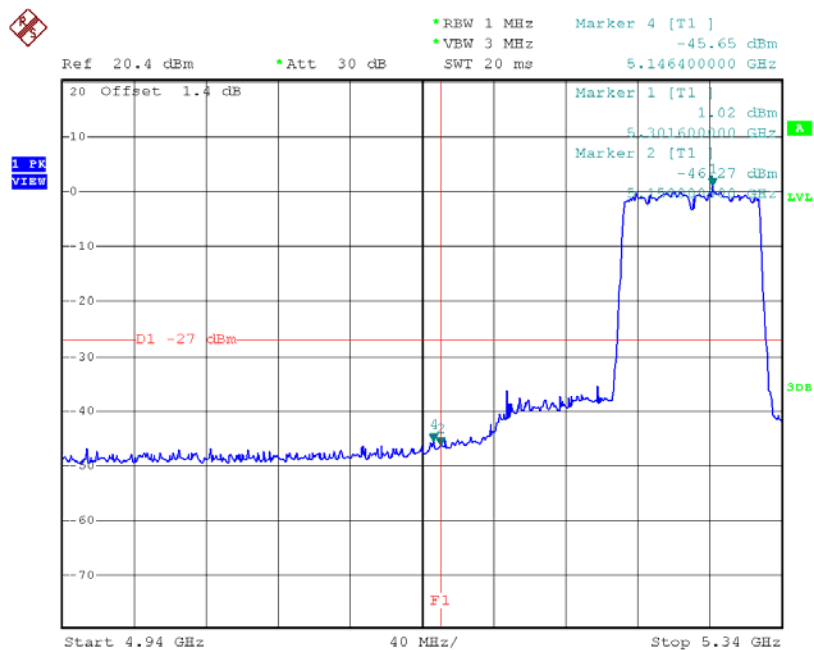


Date: 5.MAY.2015 16:35:15

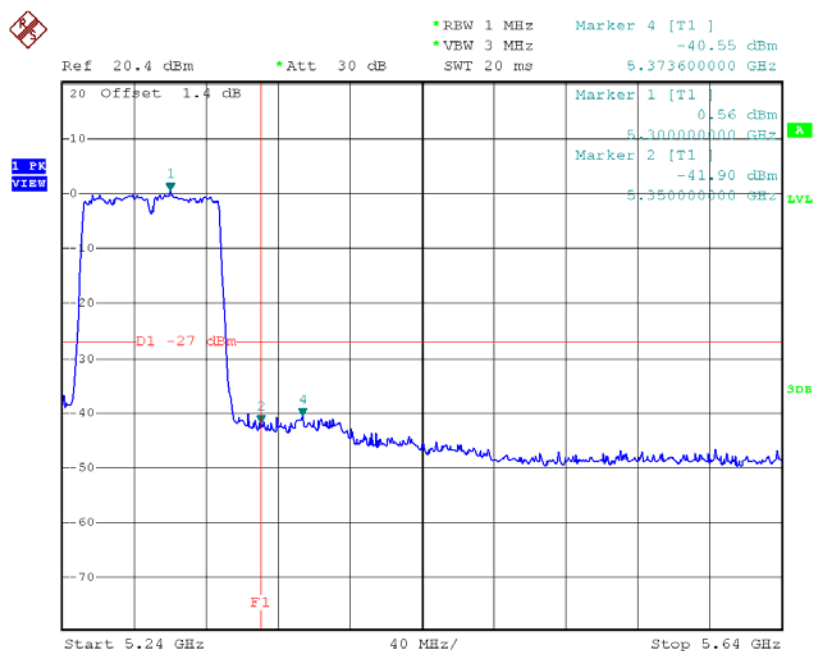

Date: 5.MAY.2015 16:35:33


Test Mode:	UNII-2C/TX AC20 Mode
------------	----------------------

TX mode CH100

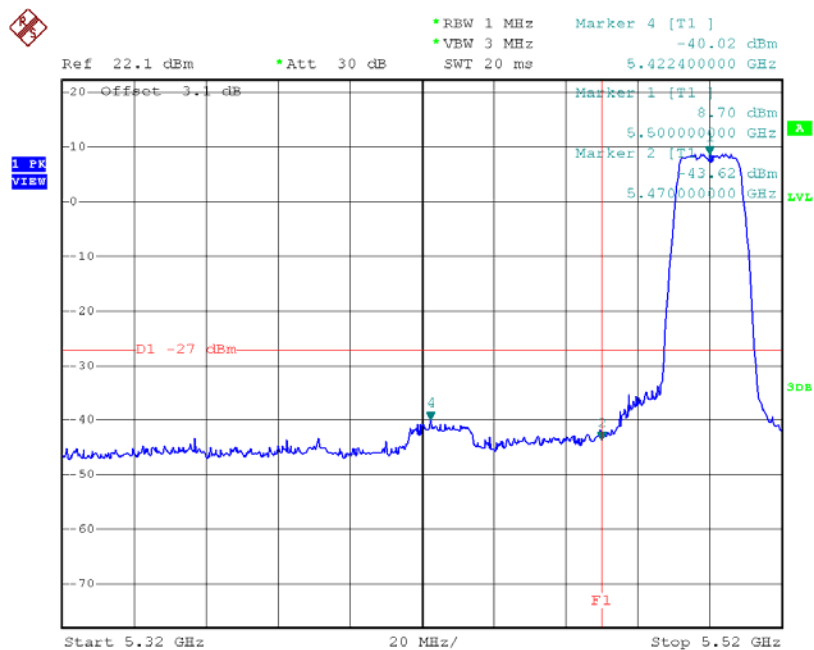

Date: 5.MAY.2015 16:54:29


TX mode CH140

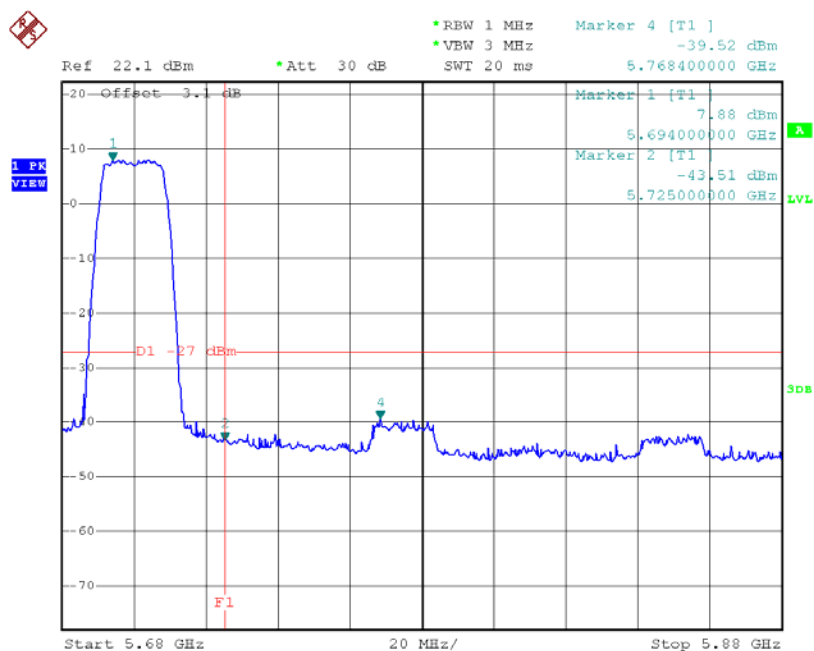

Date: 5.MAY.2015 16:56:31


Test Mode:	UNII-2C/TX AC40 Mode
------------	----------------------

TX mode CH102

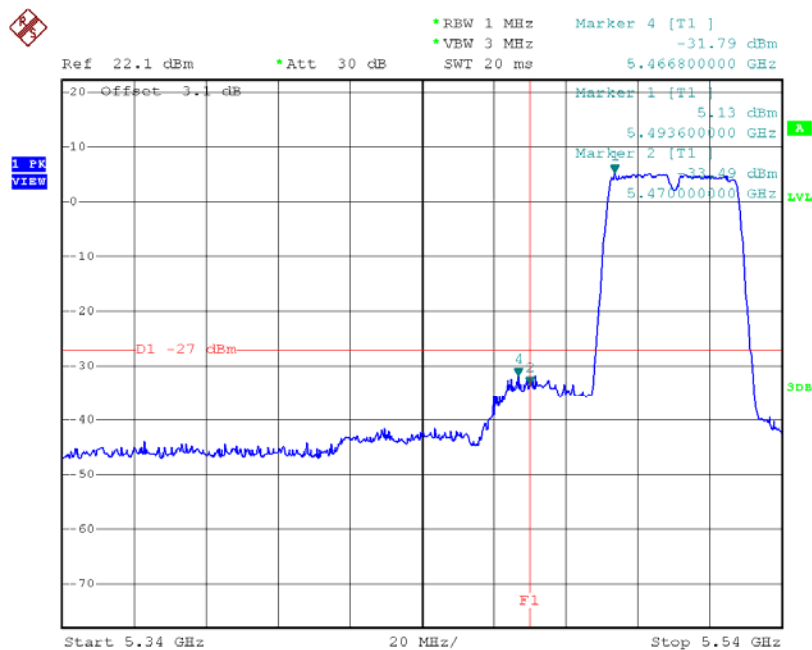

Date: 5.MAY.2015 17:01:45


TX mode CH134

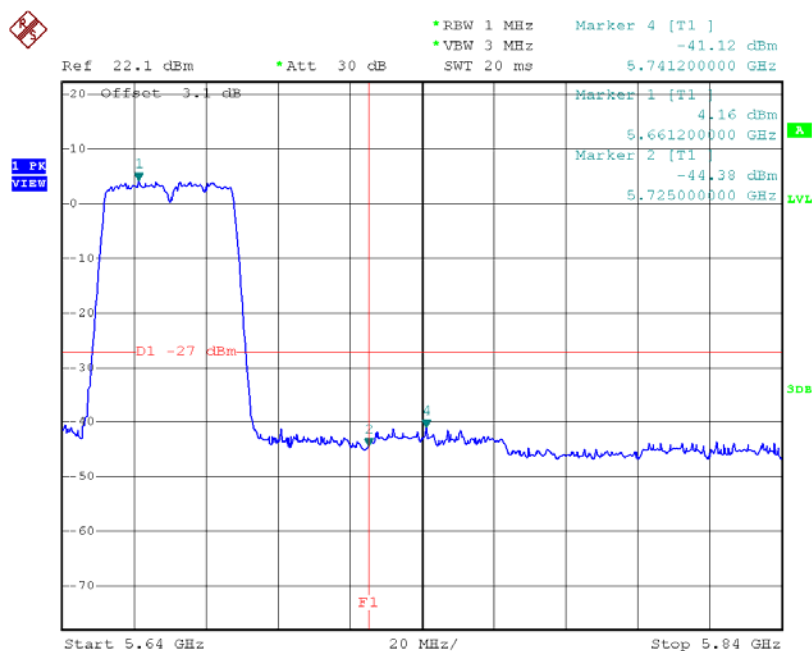

Date: 5.MAY.2015 17:03:44


Test Mode: UNII-2C/TX AC80 Mode

TX mode CH106

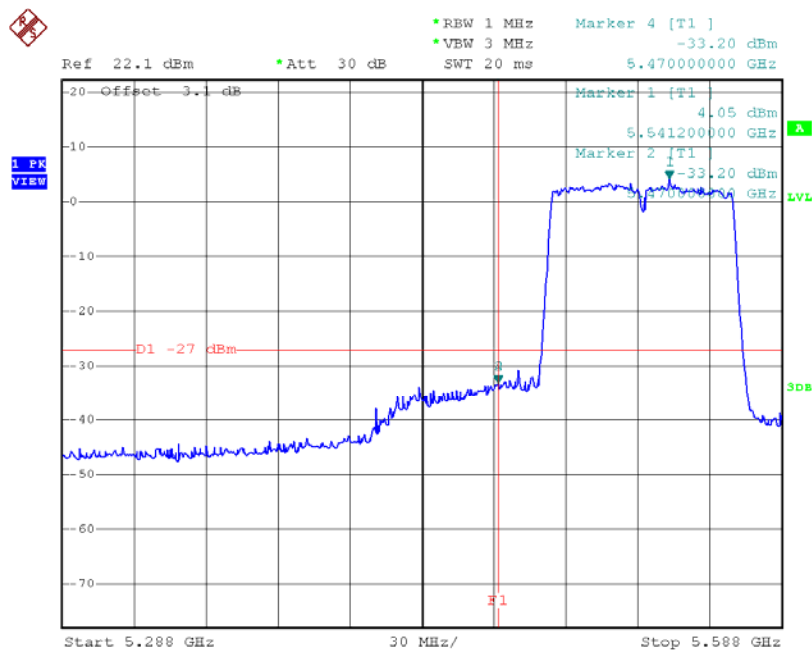

Date: 5.MAY.2015 17:04:53


TX mode CH122

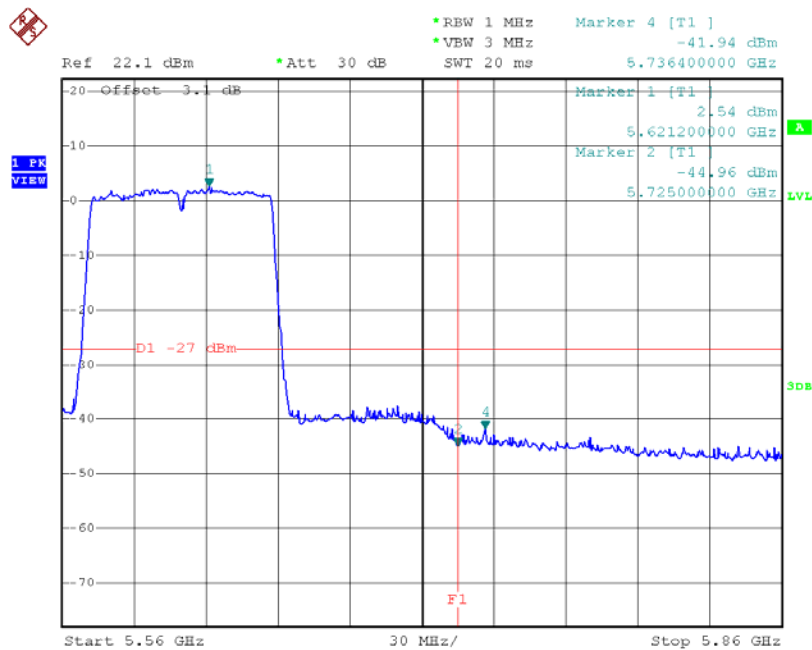

Date: 5.MAY.2015 17:06:05


Test Mode: UNII-3/TX AC20 Mode

TX AC HT20 mode CH149

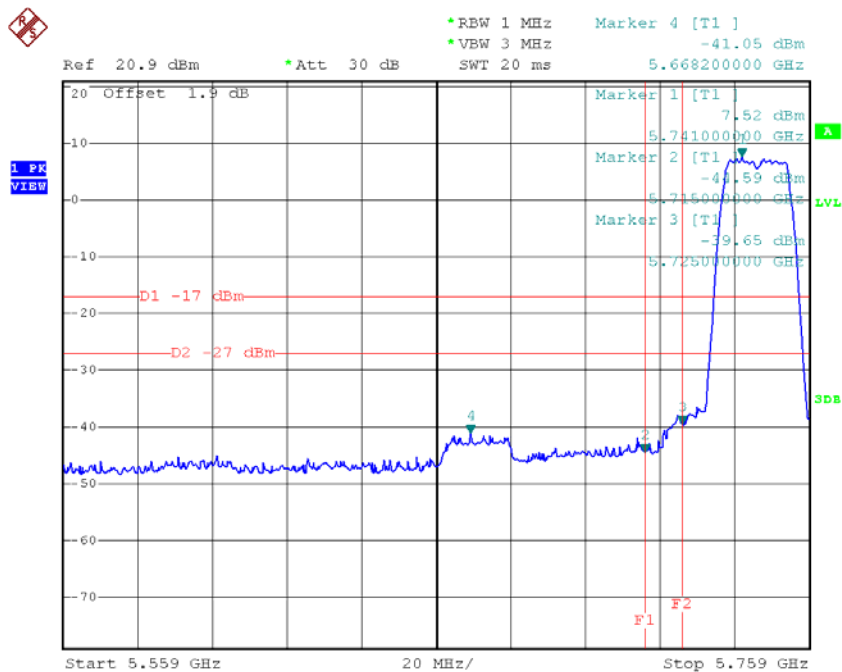

Date: 5.MAY.2015 17:20:24


TX AC HT20 mode CH165

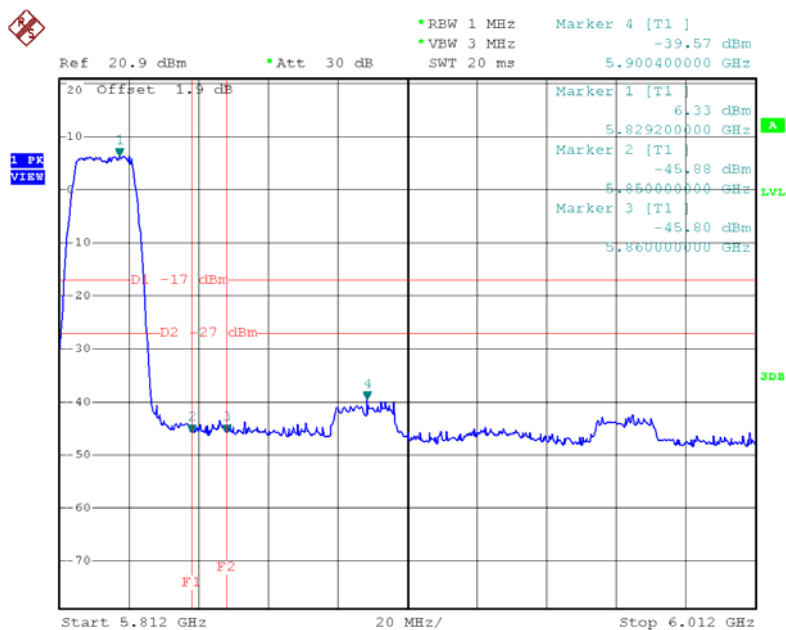

Date: 5.MAY.2015 17:21:54


Test Mode: UNII-3/TX AC40 Mode

TX AC HT40 mode CH151

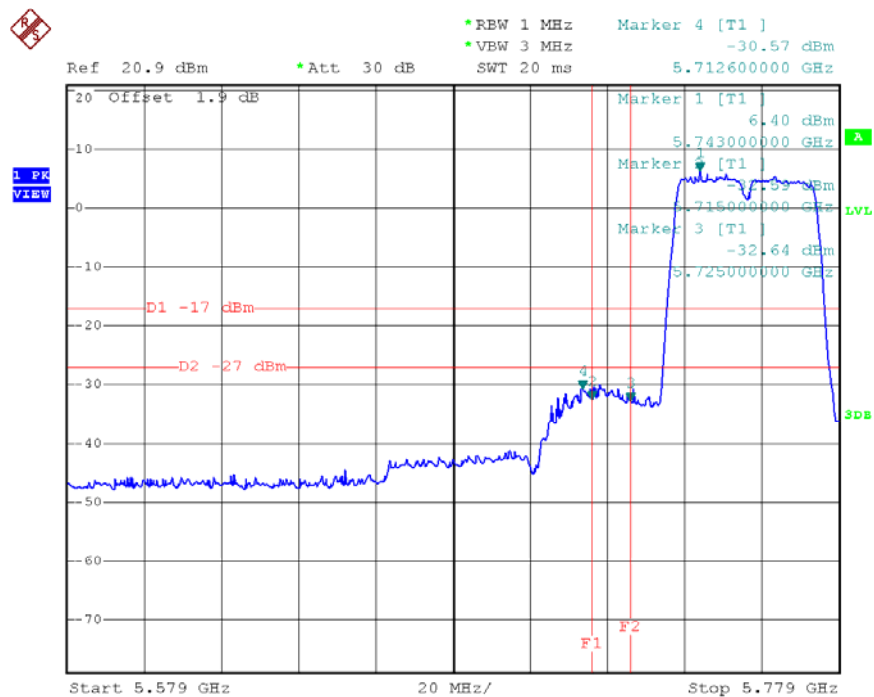

Date: 5.MAY.2015 17:25:02


TX AC HT40 mode CH159

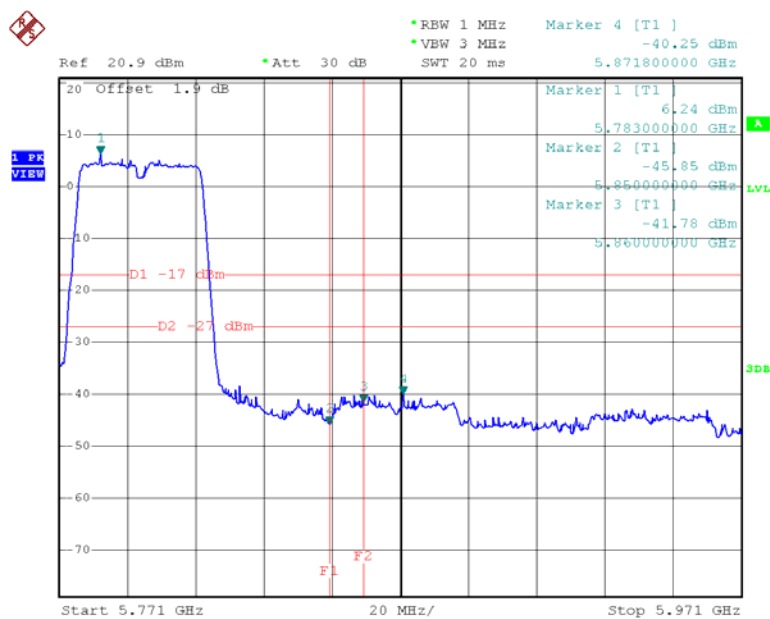


Date: 5.MAY.2015 17:25:57

Test Mode: UNII-3/TX AC80 Mode

TX AC HT80 mode CH155

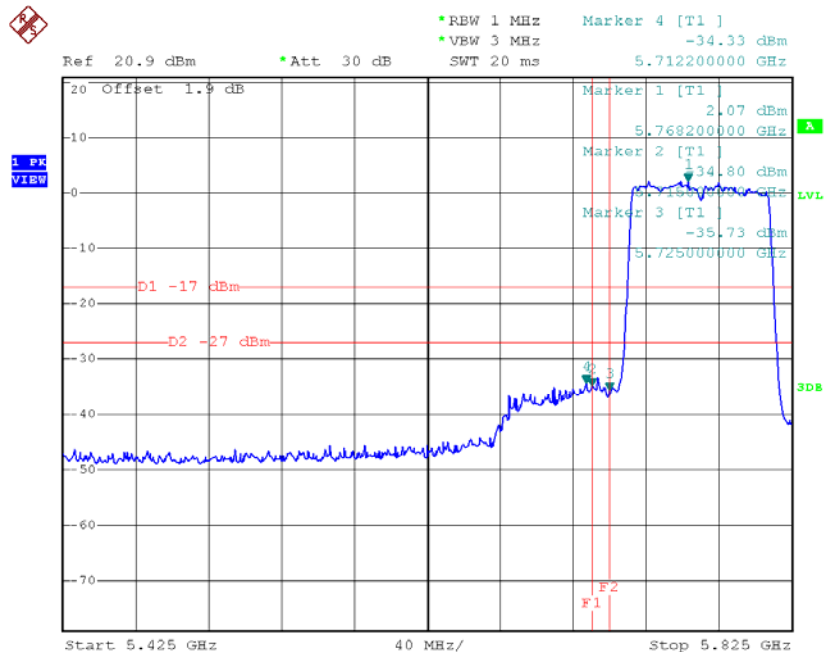

Date: 5.MAY.2015 17:27:05

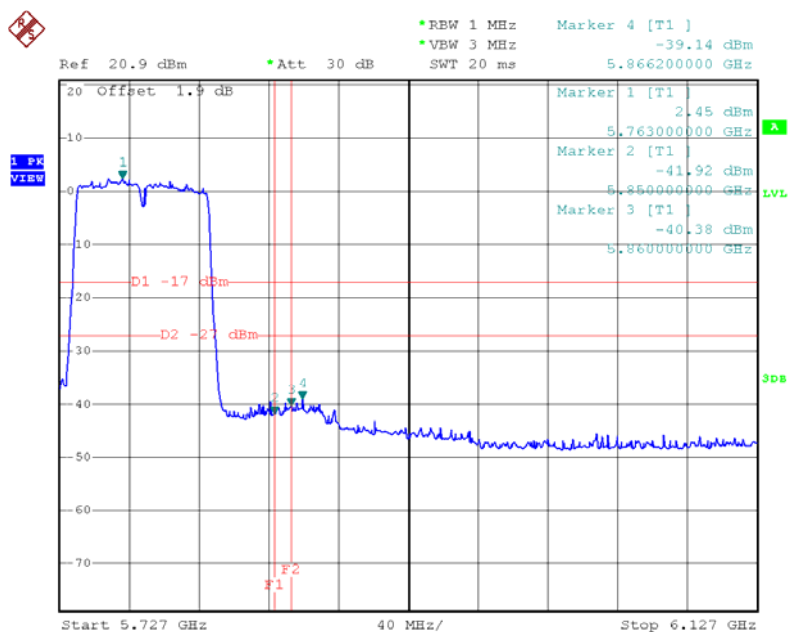


Date: 5.MAY.2015 17:27:13

ATTACHMENTH - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-1.02	0.08	-0.94	11.00
CH40	5200	-1.26	0.08	-1.18	11.00
CH48	5240	-1.15	0.08	-1.07	11.00

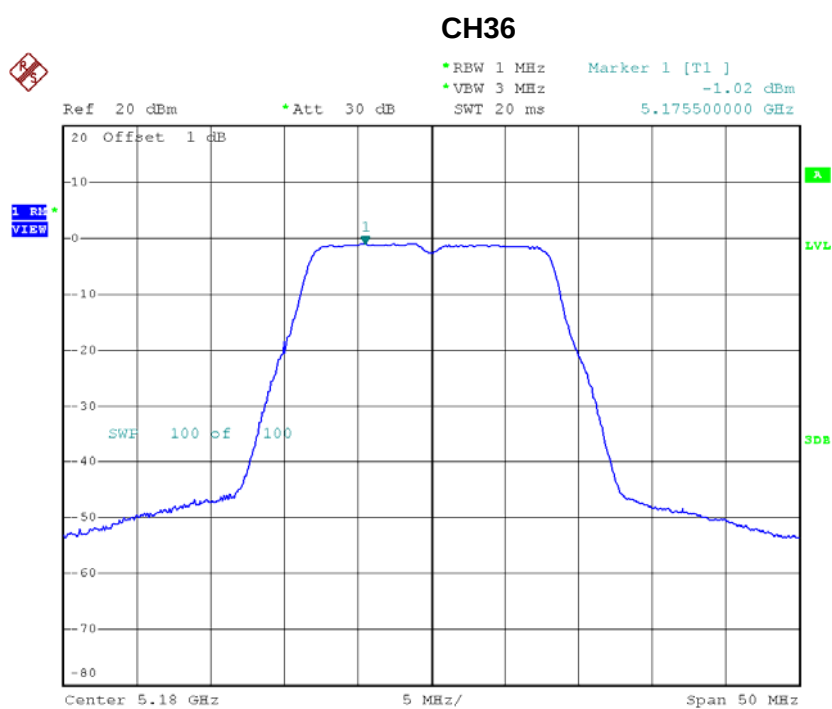


Date: 5.MAY.2015 15:58:41

CH40

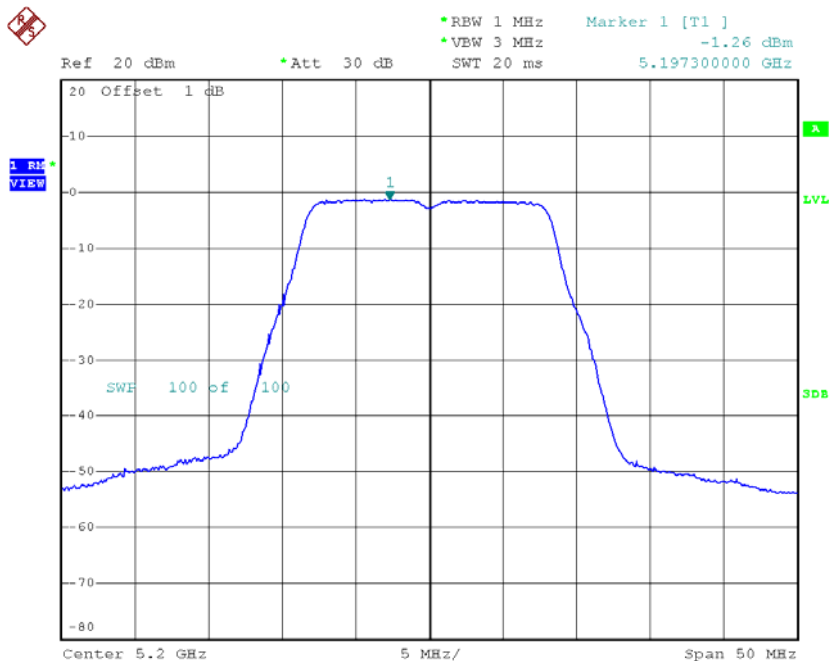

Date: 5.MAY.2015 16:01:13


CH48

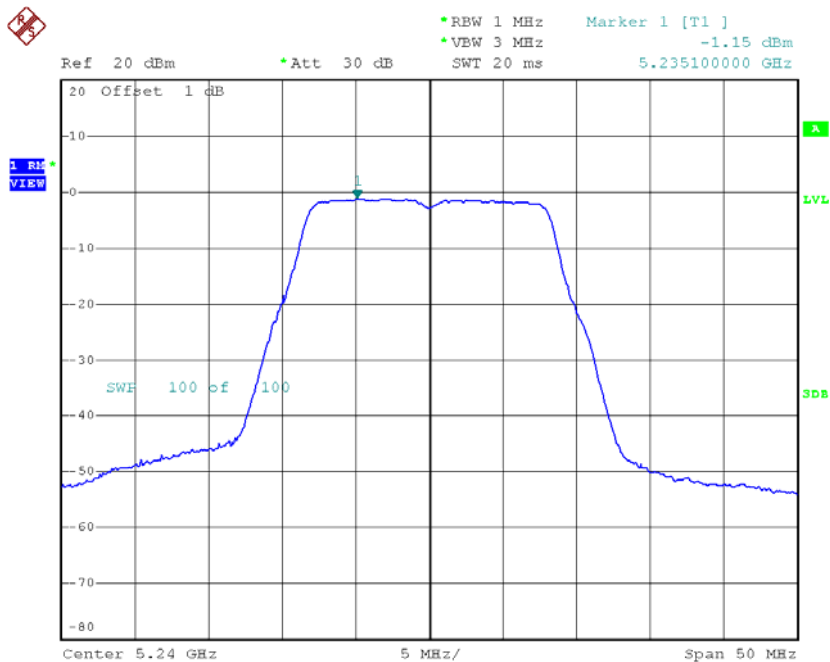

Date: 5.MAY.2015 16:02:31


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-1.45	0.07	-1.38	11.00
CH40	5200	-1.53	0.07	-1.46	11.00
CH48	5240	-1.39	0.07	-1.32	11.00

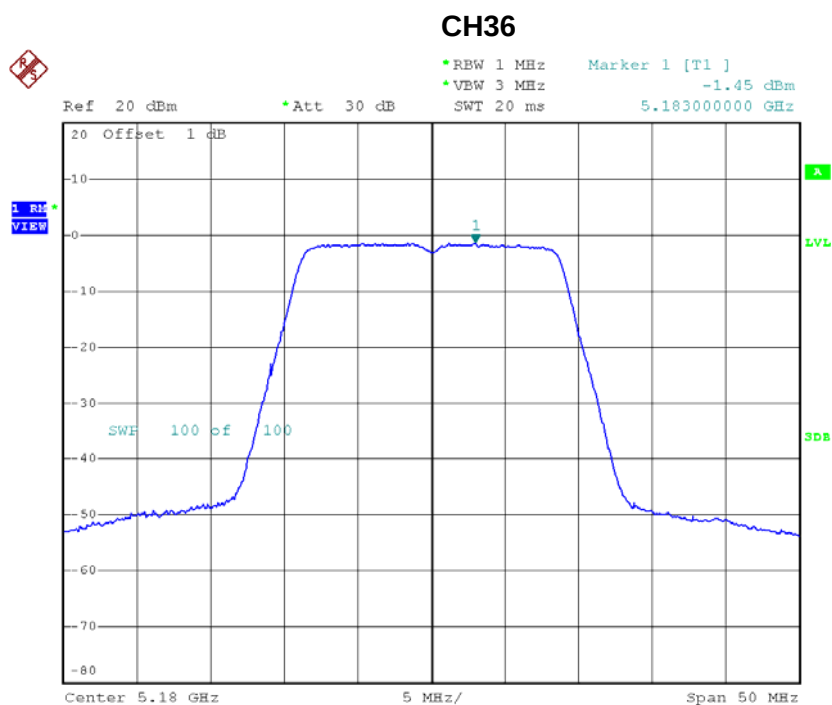


Date: 5.MAY.2015 16:04:25

CH40

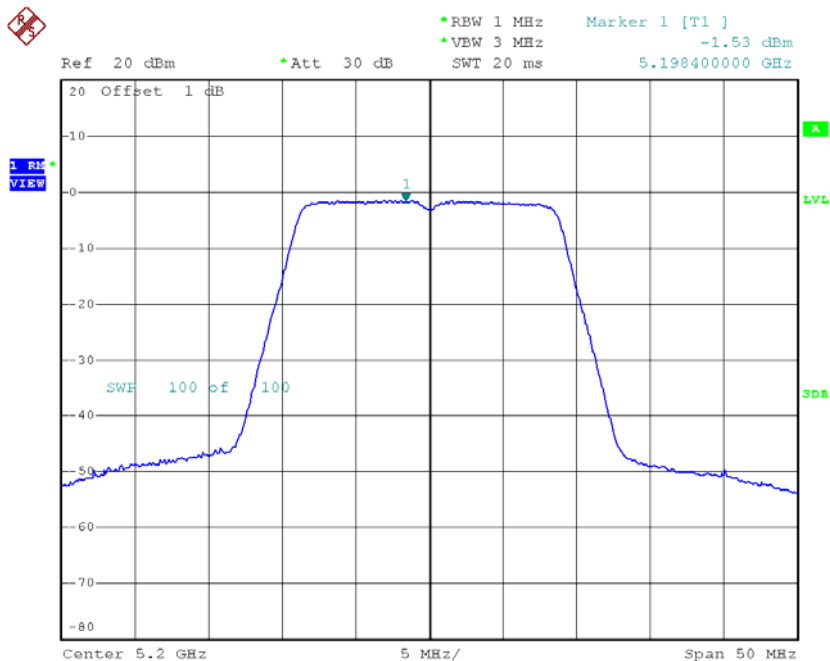

Date: 5.MAY.2015 16:05:57

CH48

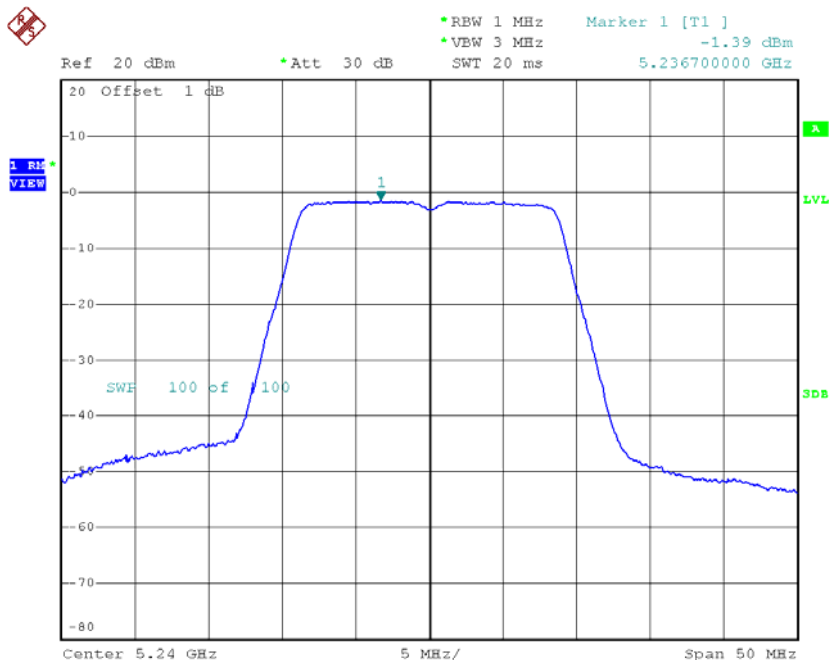


Date: 5.MAY.2015 16:07:03

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-5.08	0.30	-4.78	11.00
CH46	5230	-5.21	0.30	-4.91	11.00

CH38

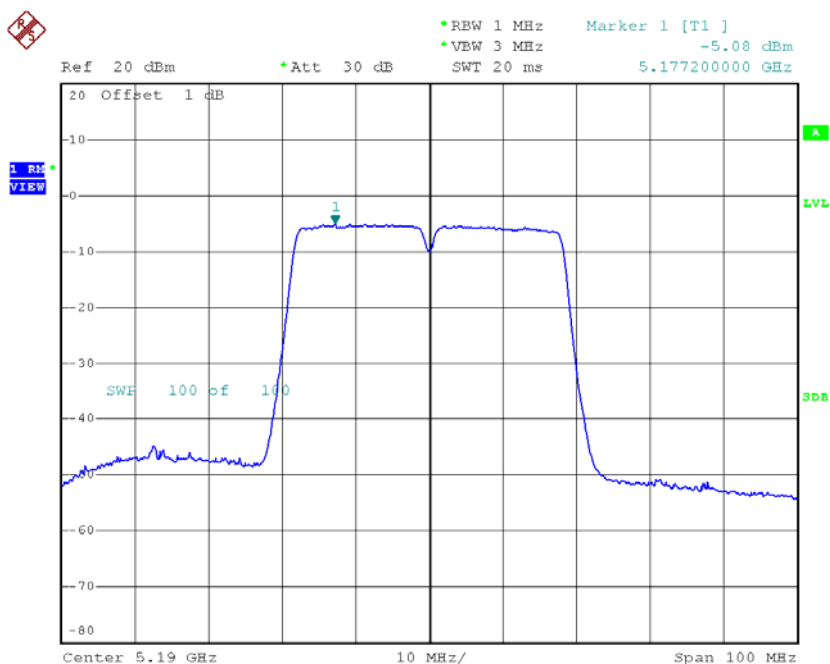

Date: 5.MAY.2015 16:11:21


CH46

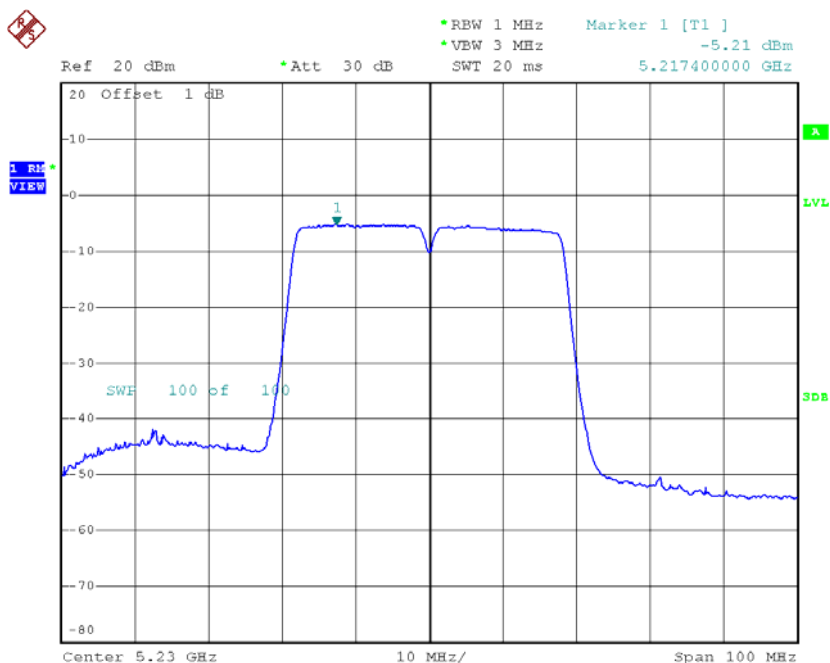

Date: 5.MAY.2015 16:12:42


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-0.85	0.08	-0.77	11.00
CH60	5300	-1.27	0.08	-1.19	11.00
CH64	5320	-1.22	0.08	-1.14	11.00

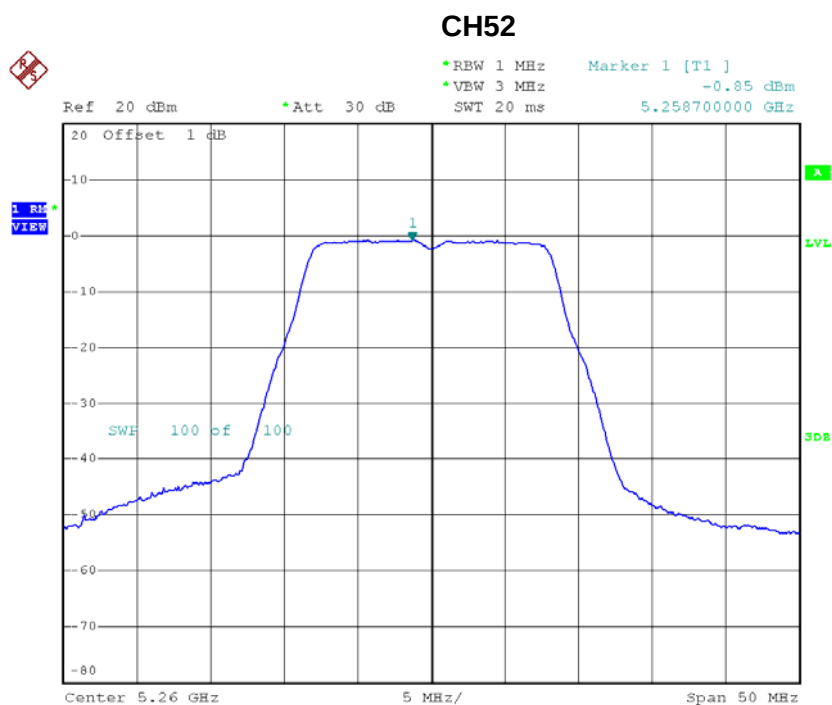


Date: 5.MAY.2015 16:18:44

CH60

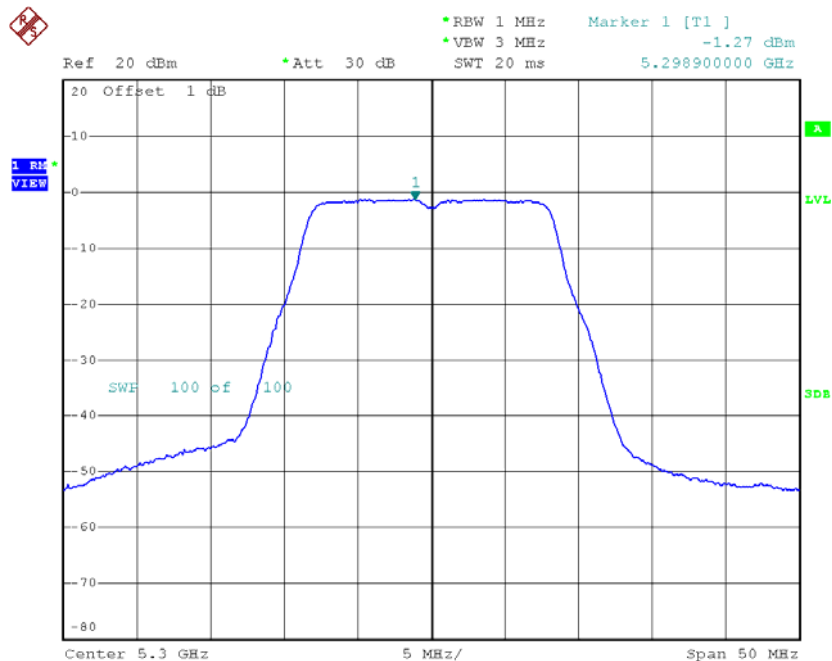

Date: 5.MAY.2015 16:20:39

CH64

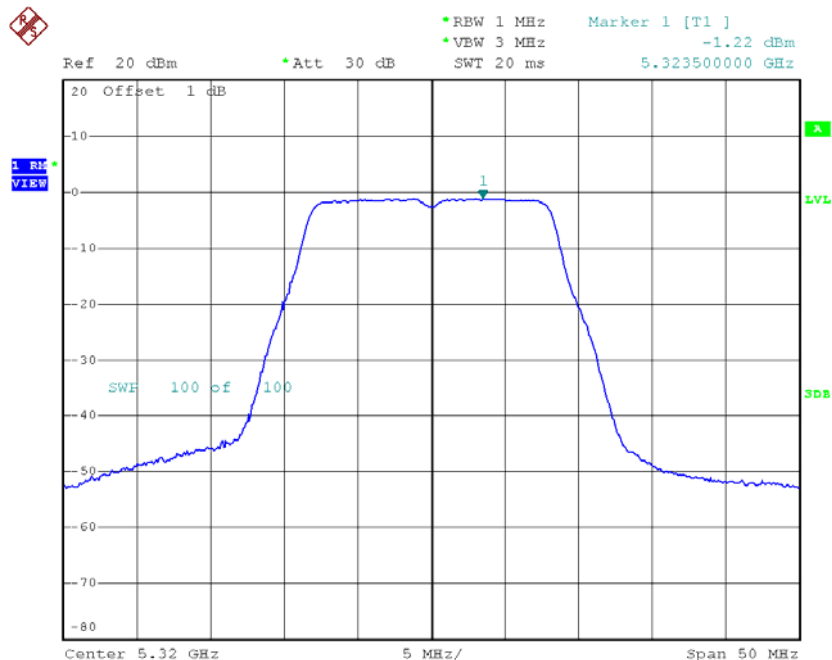


Date: 5.MAY.2015 16:21:39

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.10	0.07	-1.03	11.00
CH60	5300	-1.25	0.07	-1.18	11.00
CH64	5320	-1.34	0.07	-1.27	11.00

CH52

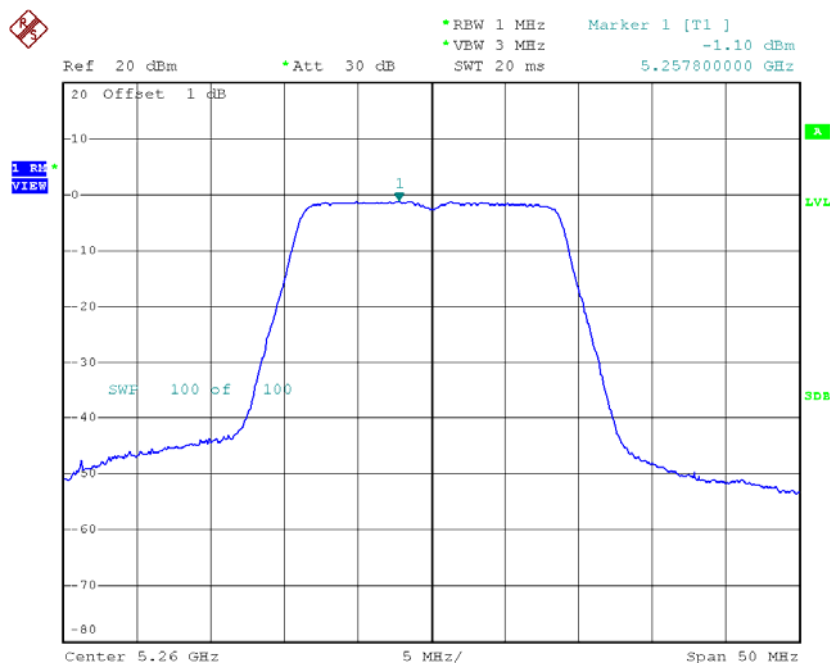


Date: 5.MAY.2015 16:23:02

CH60

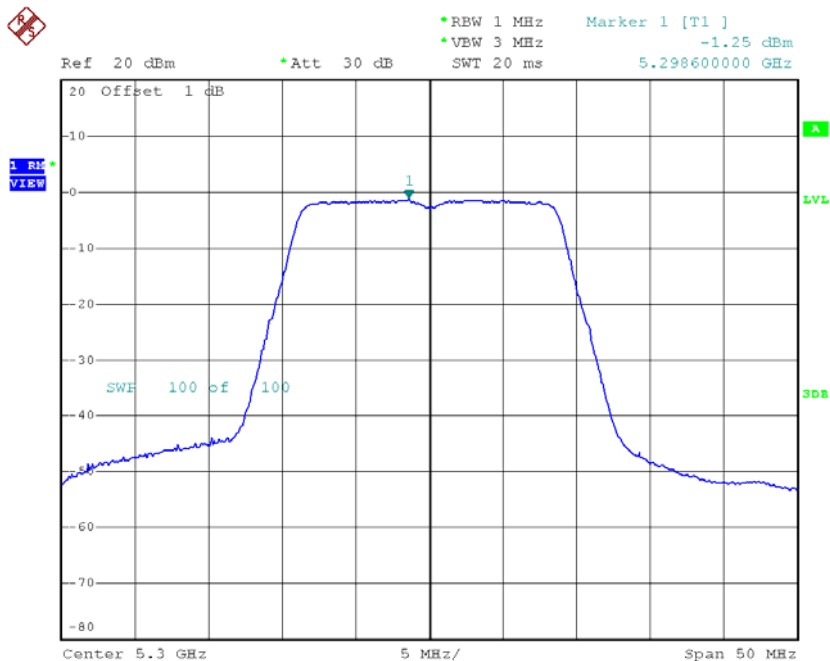

Date: 5.MAY.2015 16:24:17

CH64

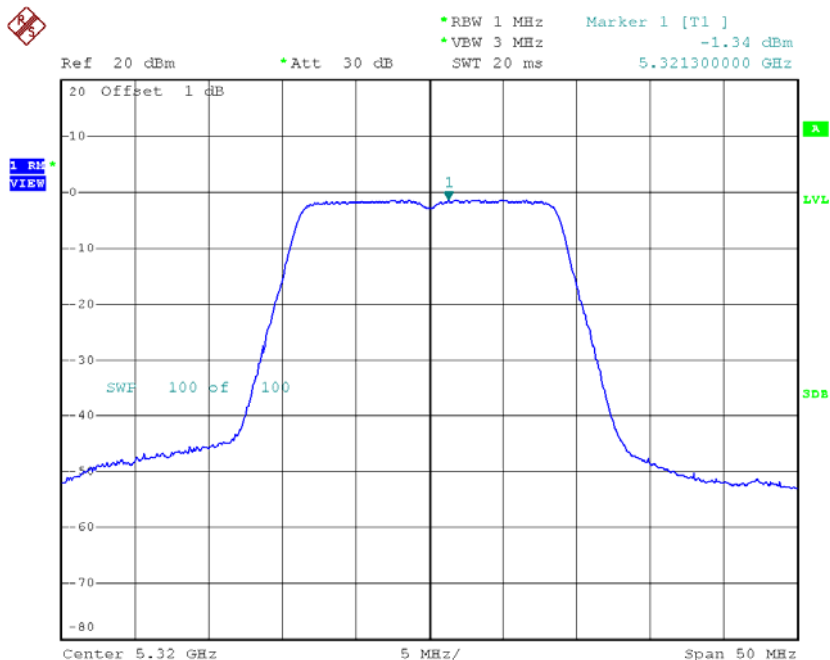


Date: 5.MAY.2015 16:25:14

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-4.30	0.30	-4.00	11.00
CH62	5310	-4.30	0.30	-4.00	11.00

CH54

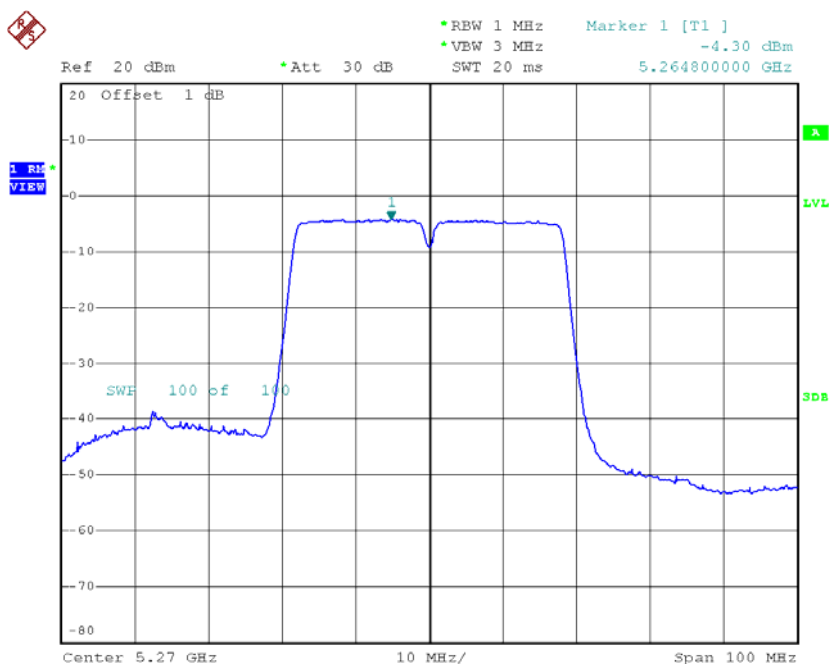

Date: 5.MAY.2015 16:29:53

CH62

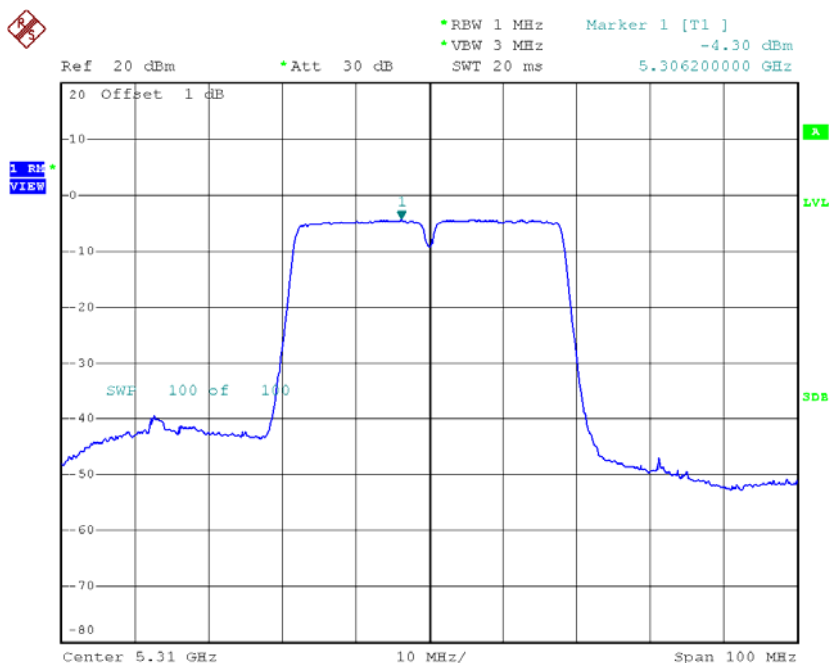


Date: 5.MAY.2015 16:30:55

Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-1.21	0.08	-1.13	11.00
CH116	5580	-1.73	0.08	-1.65	11.00
CH140	5700	-1.75	0.08	-1.67	11.00

CH100

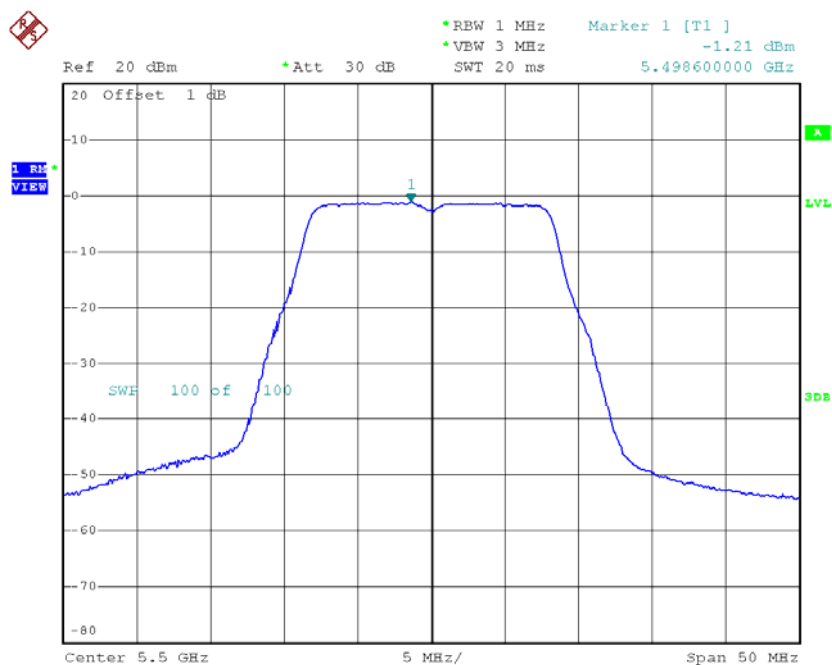


Date: 5.MAY.2015 16:46:04

CH116

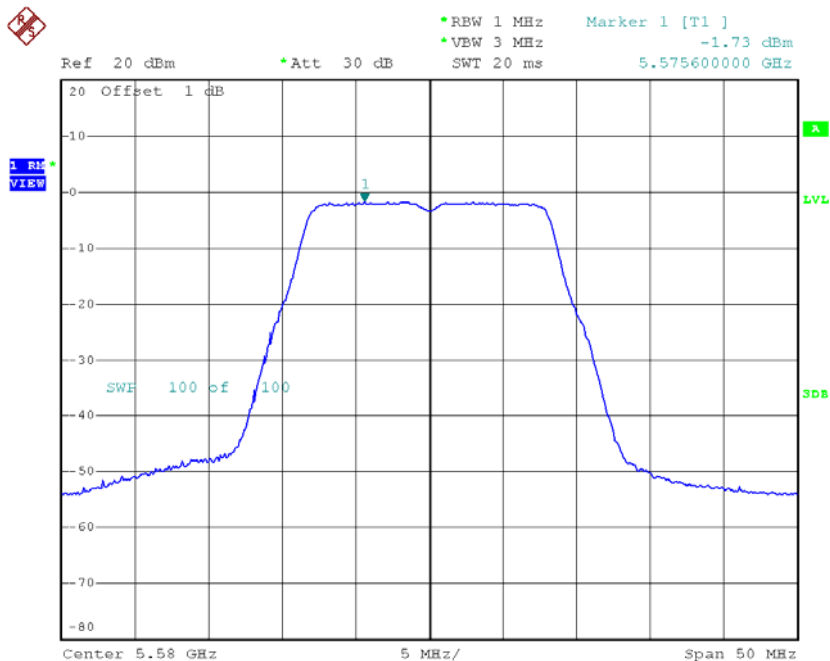

Date: 5.MAY.2015 16:48:32

CH140

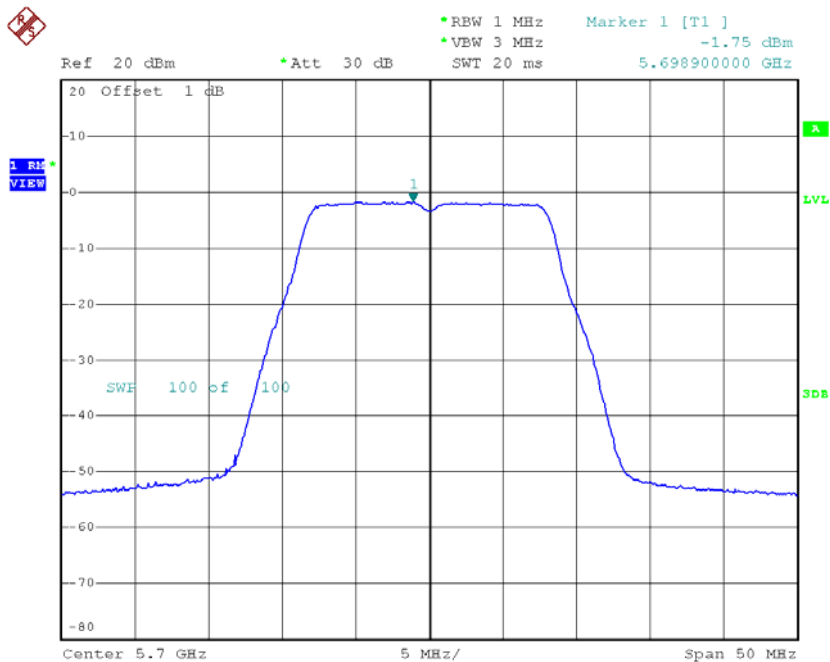


Date: 5.MAY.2015 16:49:32

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-1.27	0.07	-1.20	11.00
CH116	5580	-1.98	0.07	-1.91	11.00
CH140	5700	-2.24	0.07	-2.17	11.00

CH100

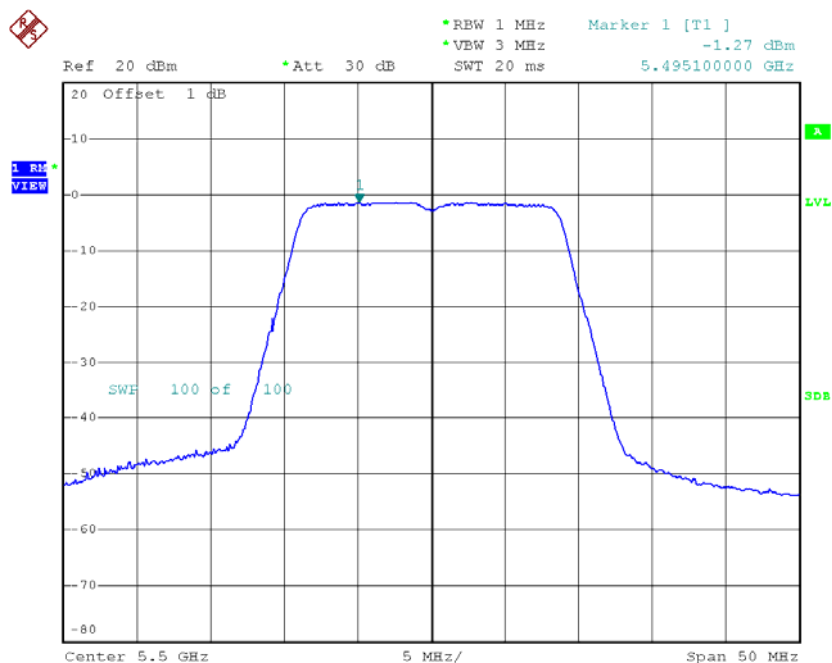


Date: 5.MAY.2015 16:50:43

CH116

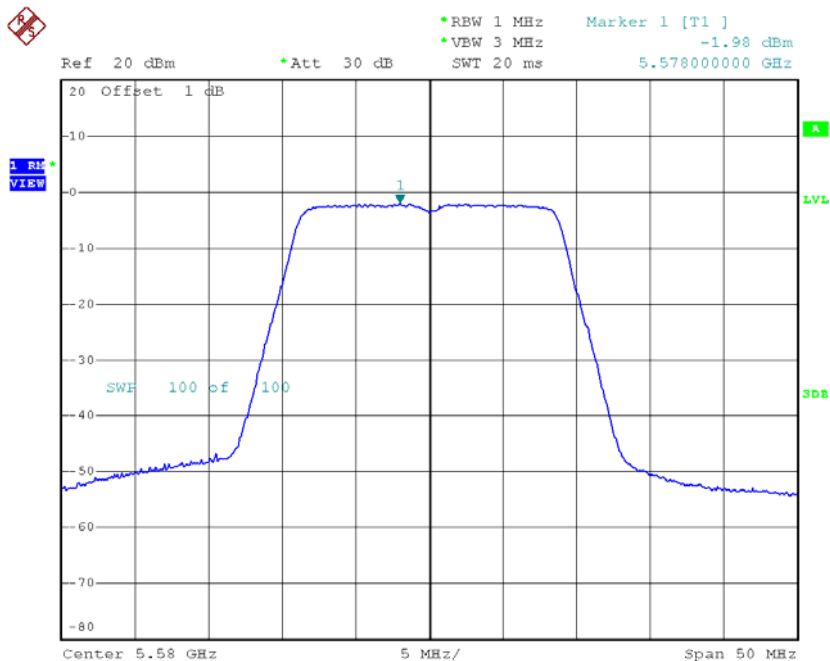

Date: 5.MAY.2015 16:51:54

CH140

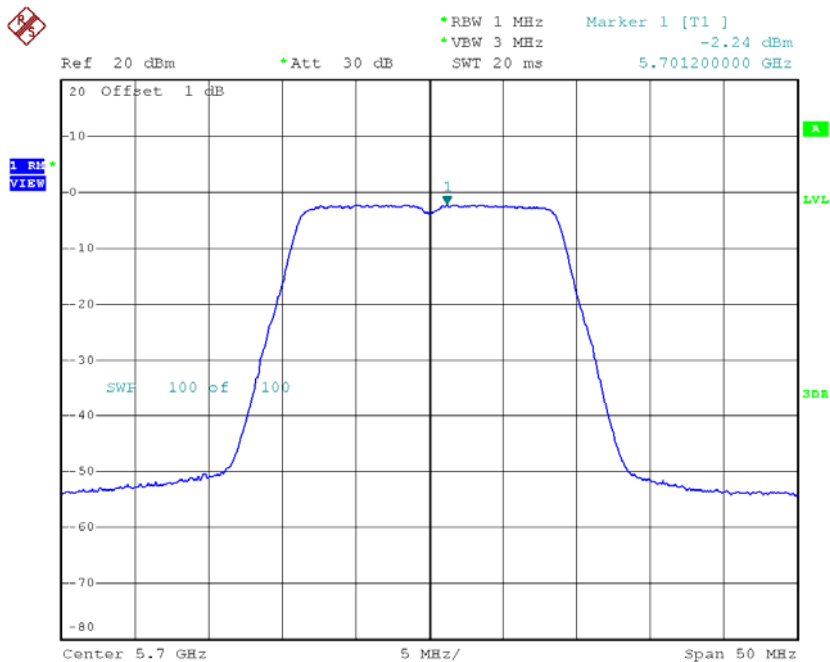


Date: 5.MAY.2015 16:52:37

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-4.92	0.30	-4.62	11.00
CH110	5550	-5.38	0.30	-5.08	11.00
CH134	5670	-6.23	0.30	-5.93	11.00

CH102

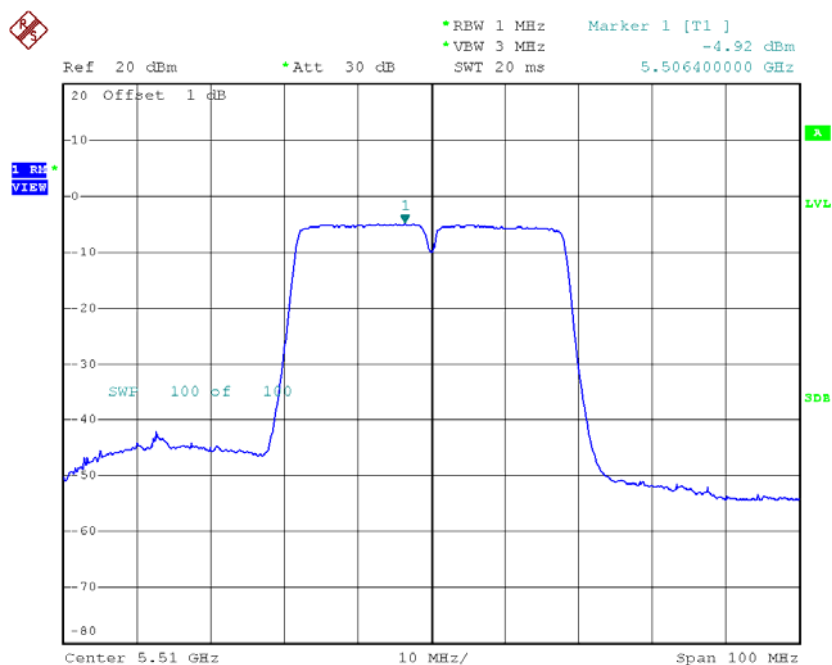


Date: 5.MAY.2015 16:57:23

CH110

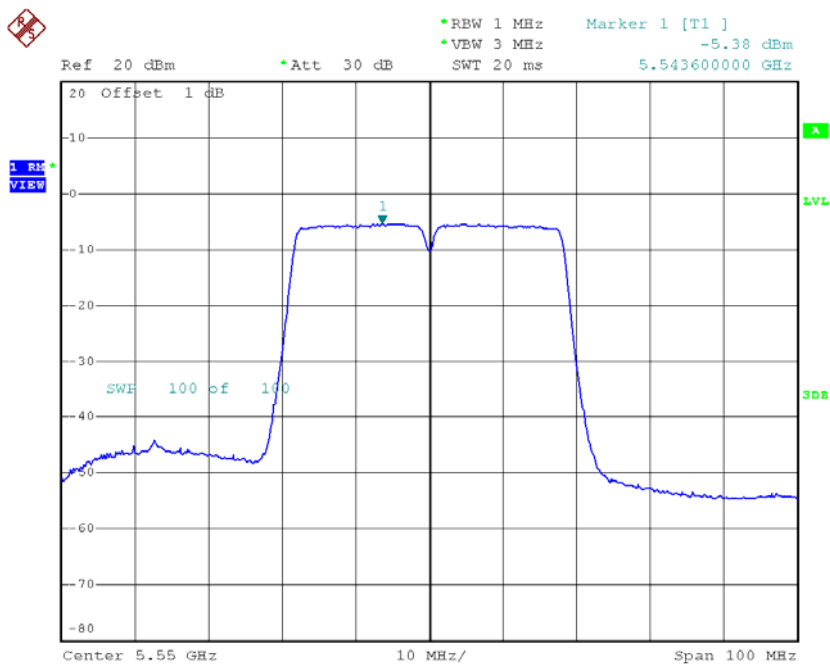

Date: 5.MAY.2015 16:59:36

CH134

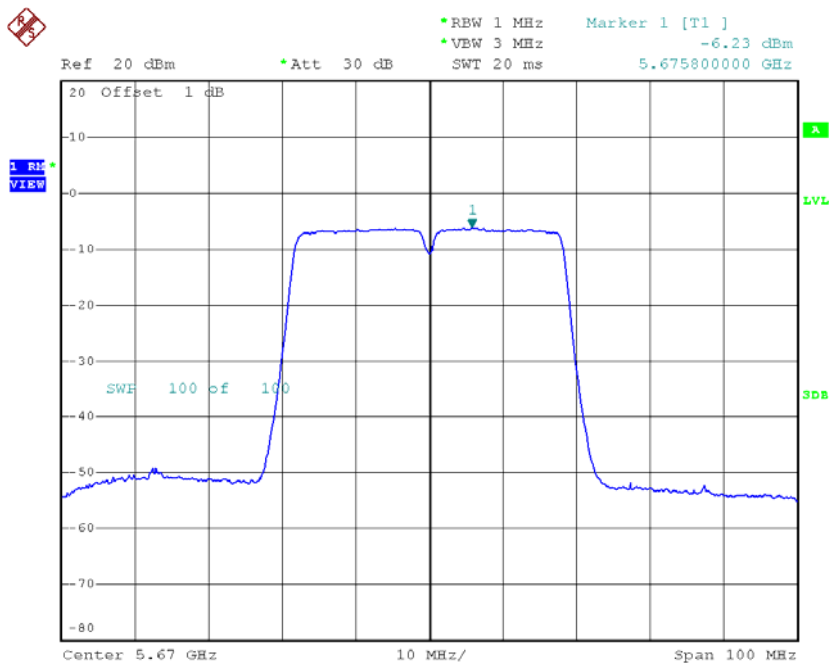


Date: 5.MAY.2015 17:00:20

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	Power Density (dBm/500KHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/500KHz)	Limit (dBm/500KHz)
CH149	5745	-3.31	0.08	-3.23	30.00
CH157	5785	-4.38	0.08	-4.30	30.00
CH165	5825	-5.23	0.08	-5.15	30.00

TX CH149

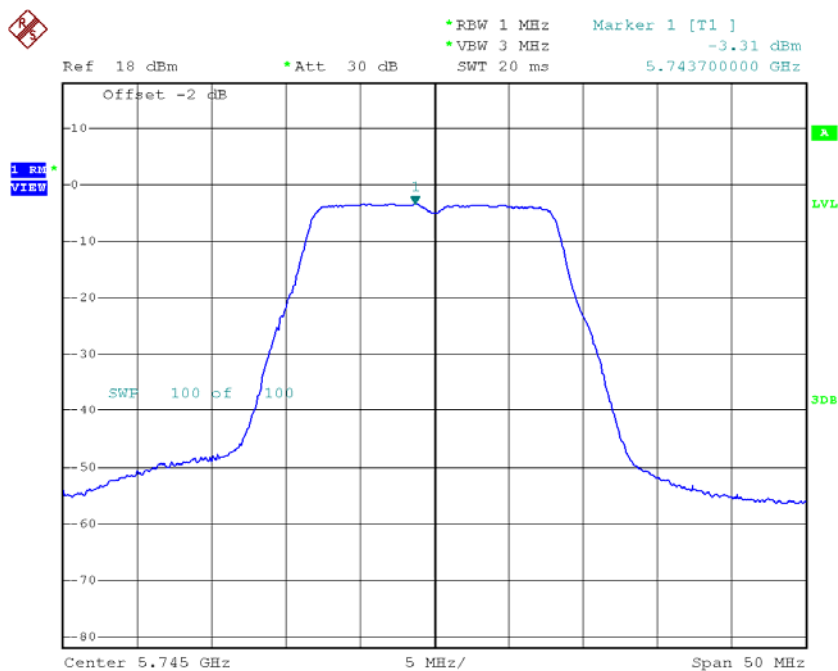


Date: 5.MAY.2015 17:10:00

TX CH157

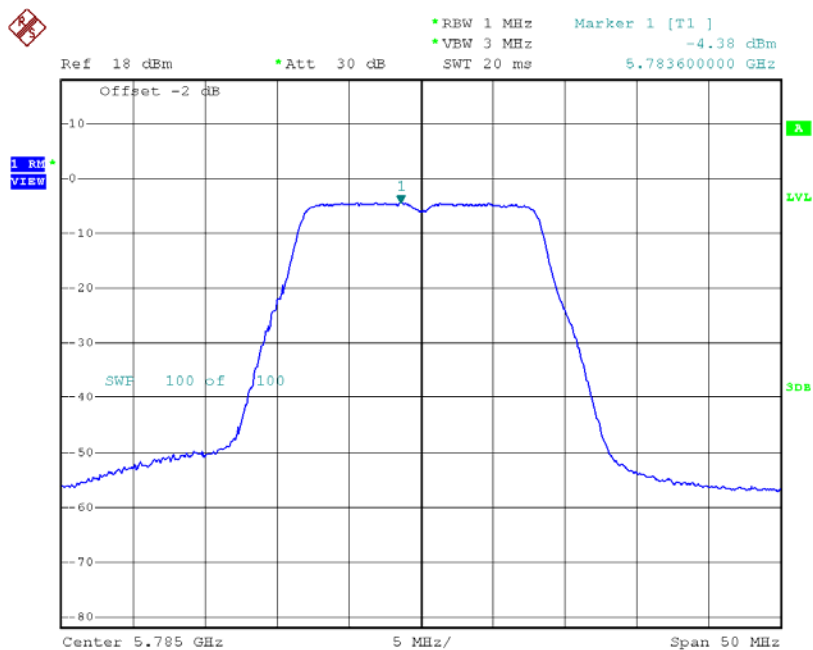

Date: 5.MAY.2015 17:11:51

TX CH165

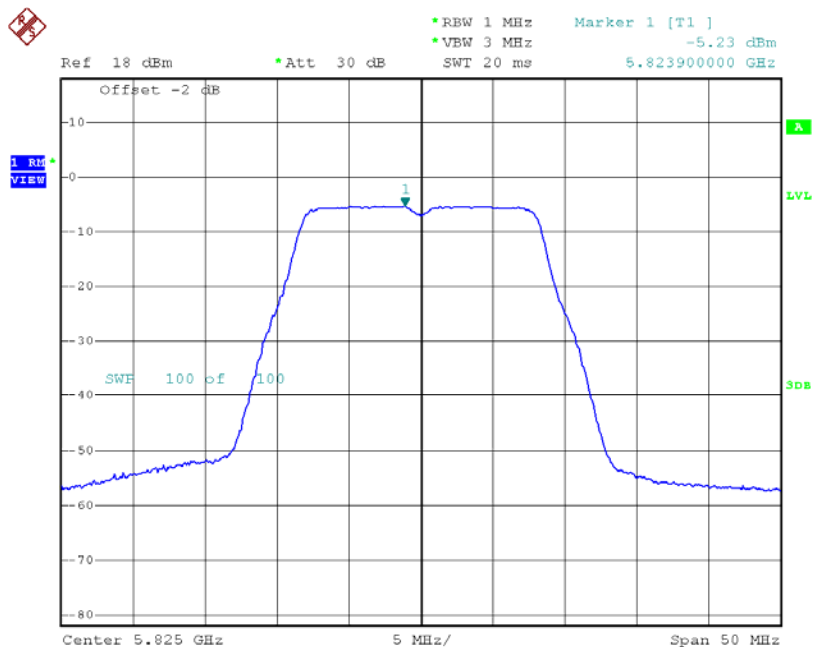


Date: 5.MAY.2015 17:14:13

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	Power Density (dBm/500KHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/500KHz)	Limit (dBm/500KHz)
CH149	5745	-4.46	0.07	-4.39	30.00
CH157	5785	-4.50	0.07	-4.43	30.00
CH165	5825	-5.41	0.07	-5.34	30.00

TX CH149

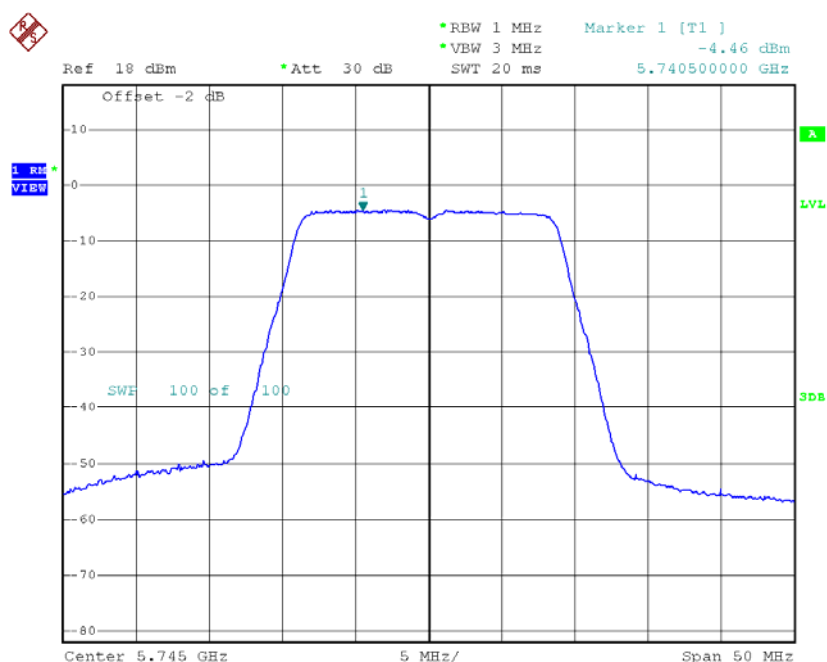


Date: 5.MAY.2015 17:15:27

TX CH157

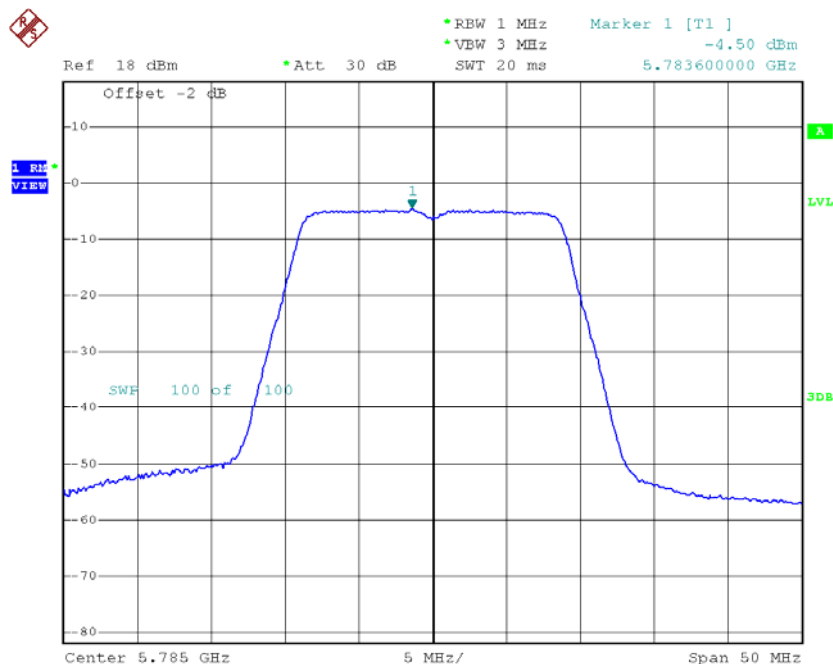

Date: 5.MAY.2015 17:16:48

TX CH165

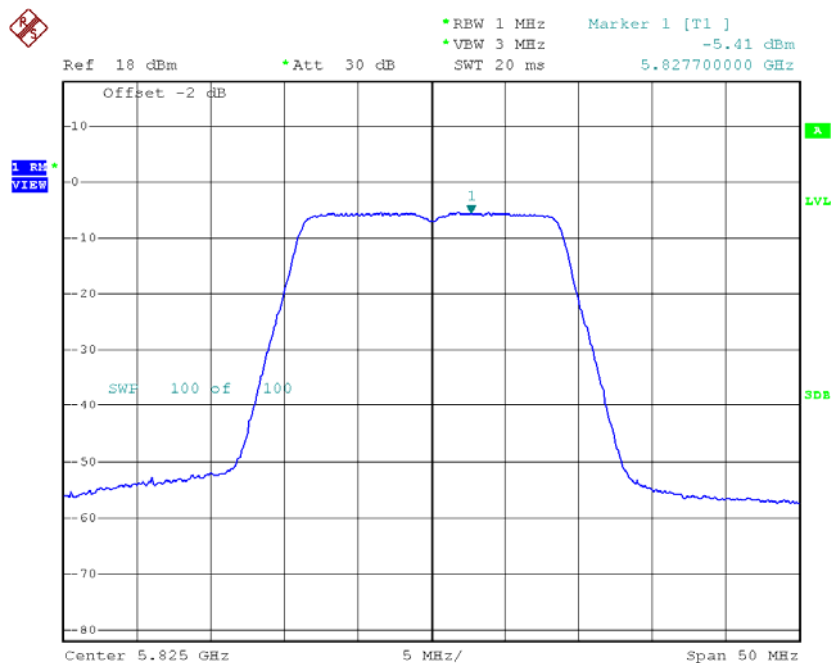


Date: 5.MAY.2015 17:17:30

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	Power Density (dBm/500KHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/500KHz)	Limit (dBm/500KHz)
CH151	5755	-6.44	0.30	-6.14	30.00
CH159	5795	-6.74	0.30	-6.44	30.00

TX CH151

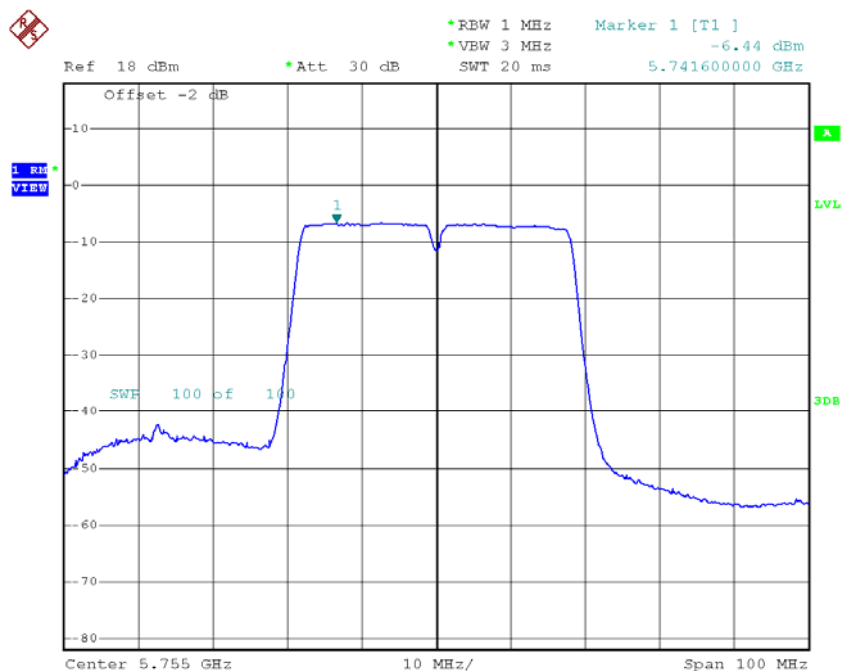

Date: 5.MAY.2015 17:22:36


TX CH159

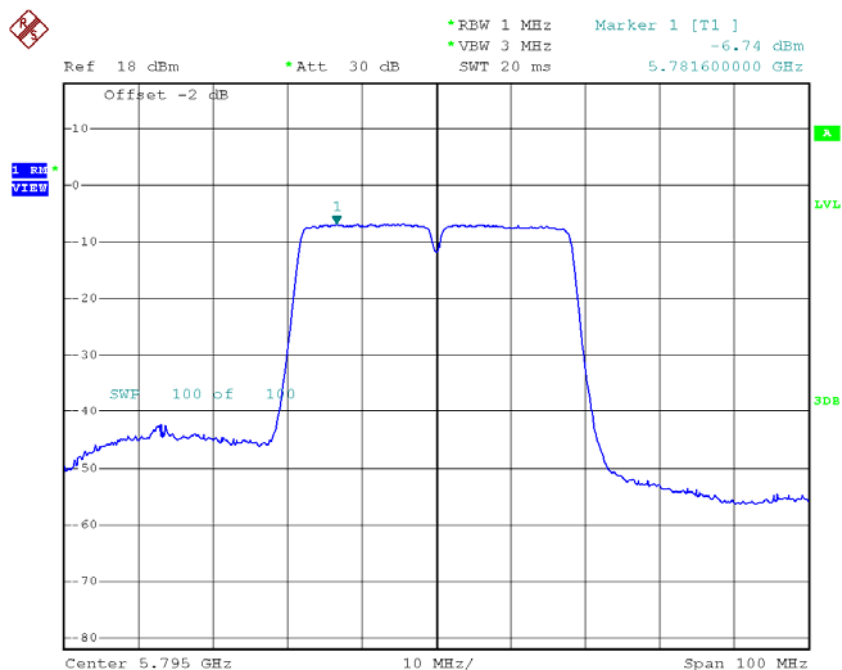

Date: 5.MAY.2015 17:23:44


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-1.60	0.11	-1.49	11.00
CH40	5200	-1.36	0.11	-1.25	11.00
CH48	5240	-1.52	0.11	-1.41	11.00

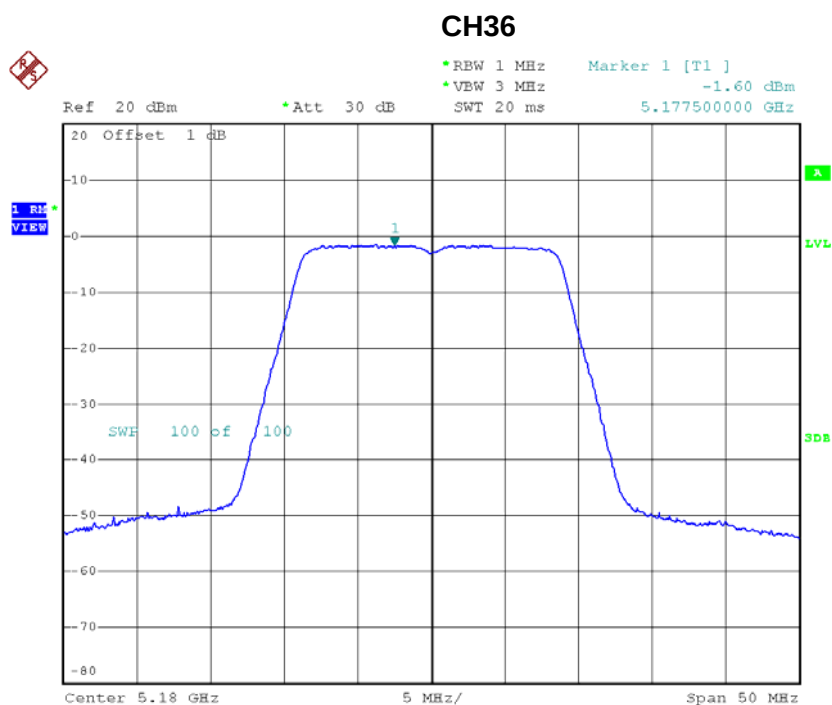


Date: 5.MAY.2015 16:08:06

CH40

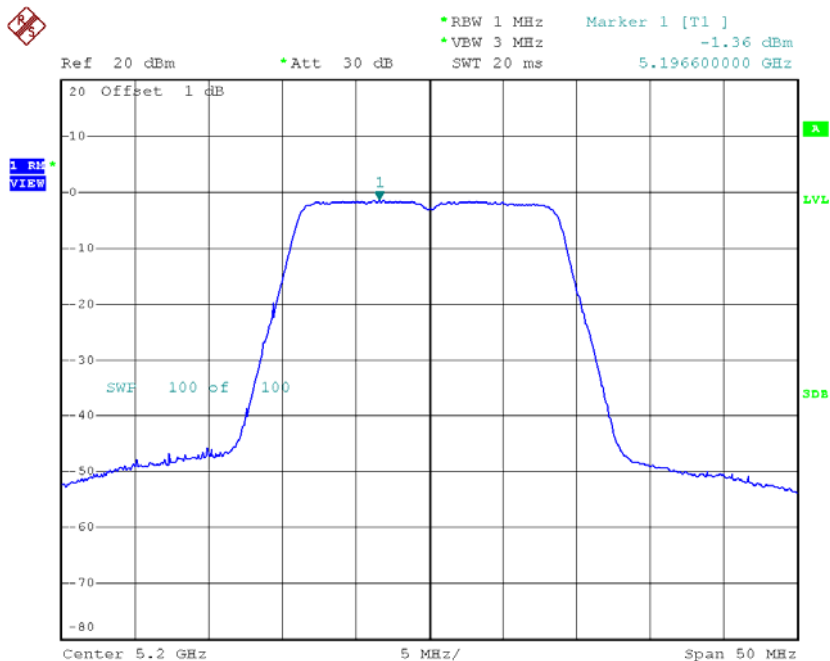

Date: 5.MAY.2015 16:09:23

CH48

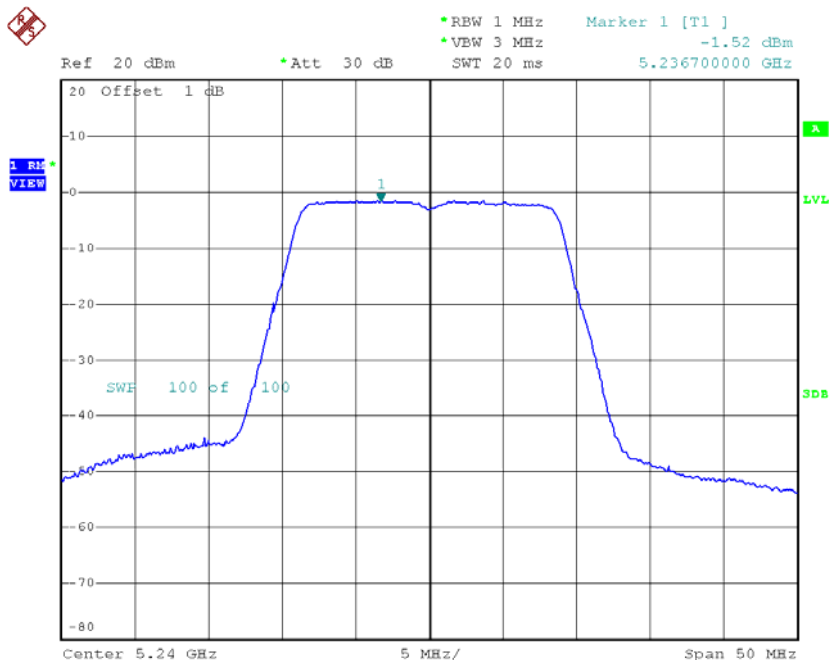


Date: 5.MAY.2015 16:10:17

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-5.17	0.29	-4.88	11.00
CH46	5230	-5.06	0.29	-4.77	11.00

CH38

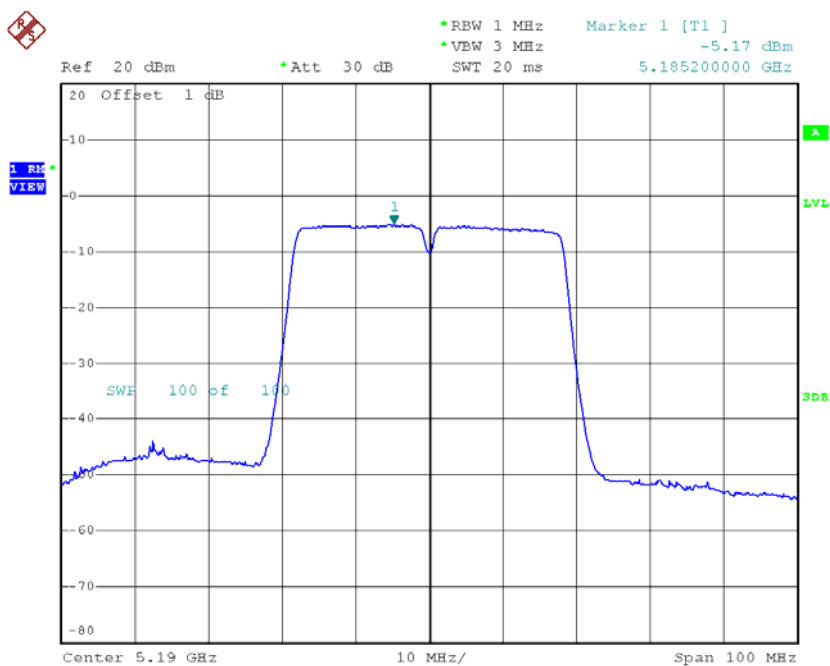

Date: 5.MAY.2015 16:13:38


CH46

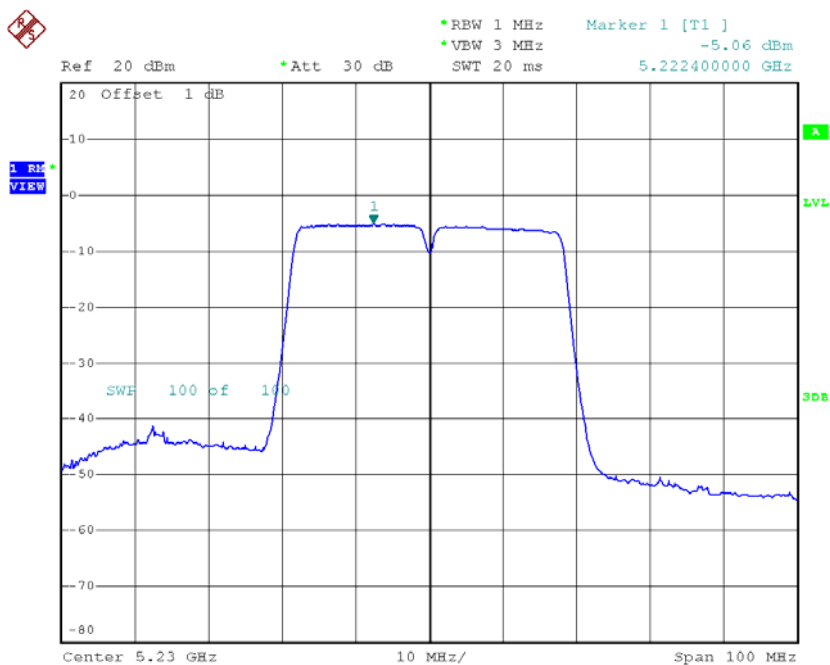

Date: 5.MAY.2015 16:14:47

Test Mode: UNII-1/TX AC80 Mode_CH42


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-8.65	0.66	-7.99	11.00

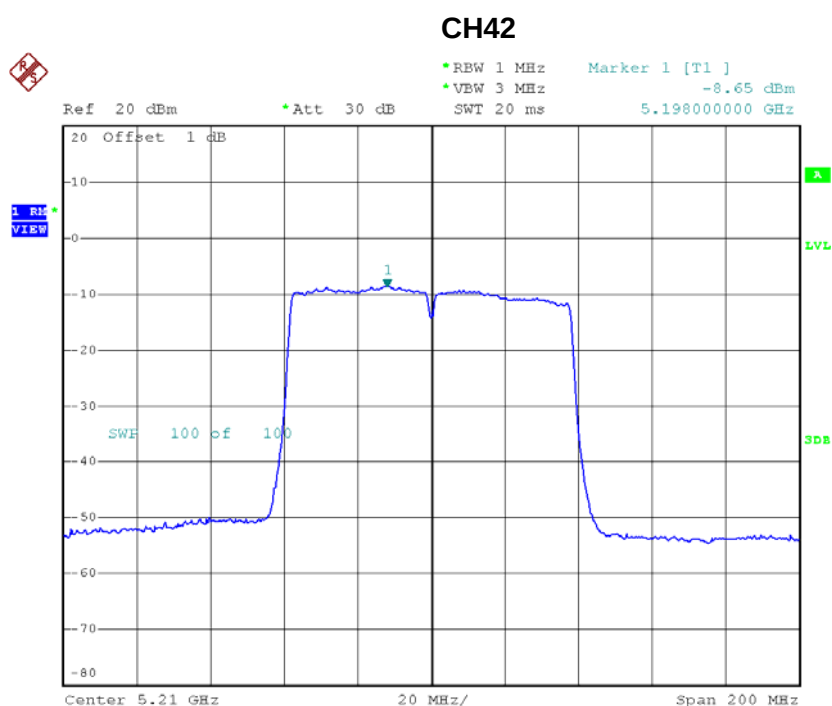

Date: 5.MAY.2015 16:16:02


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.41	0.11	-1.30	11.00
CH60	5300	-1.26	0.11	-1.15	11.00
CH64	5320	-1.01	0.11	-0.90	11.00

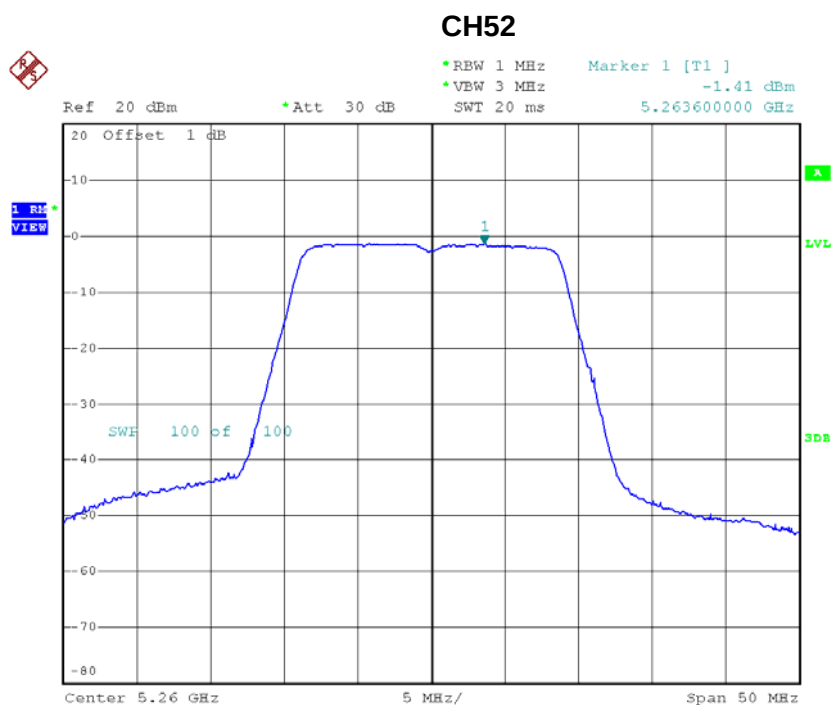


Date: 5.MAY.2015 16:26:08

CH60

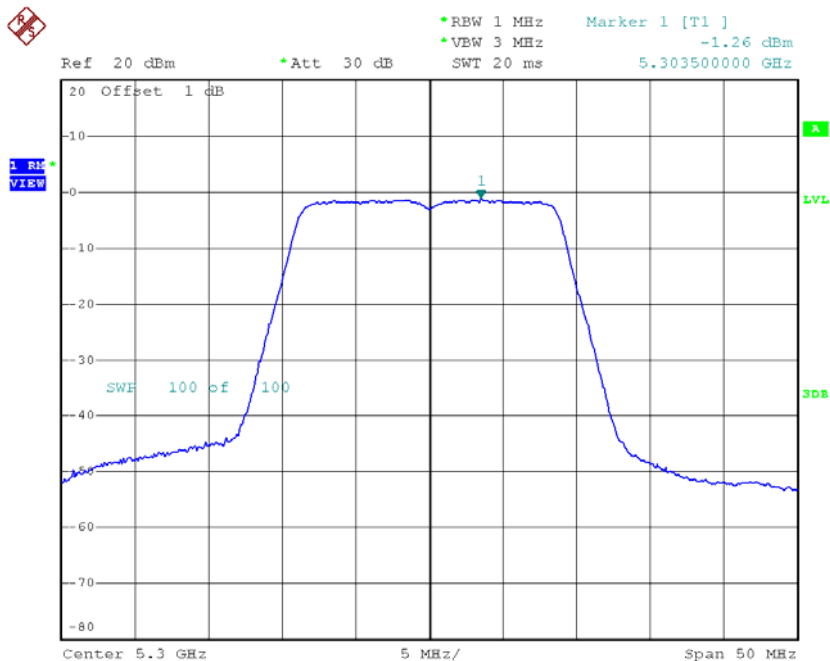

Date: 5.MAY.2015 16:27:27

CH64

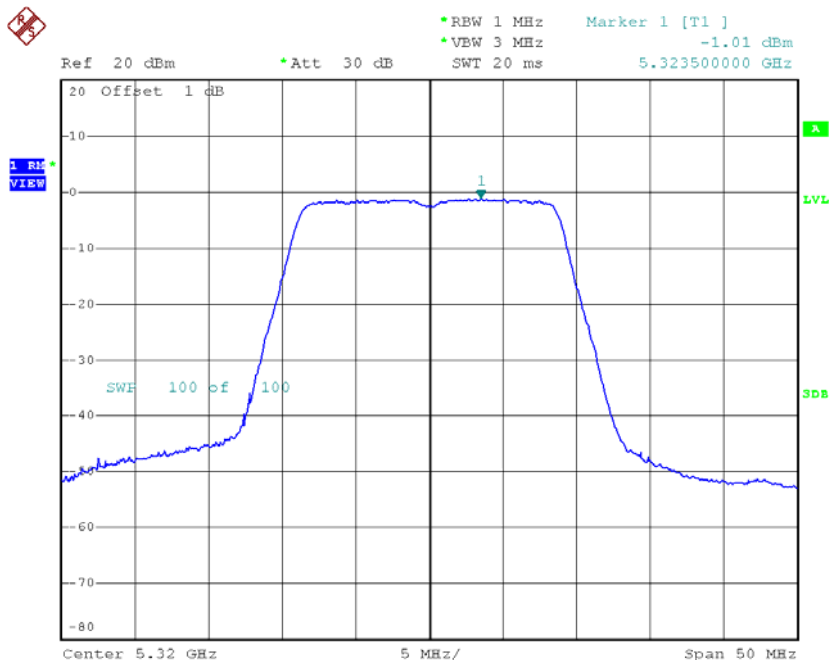


Date: 5.MAY.2015 16:28:02

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-4.20	0.29	-3.91	11.00
CH62	5310	-4.45	0.29	-4.16	11.00

CH54

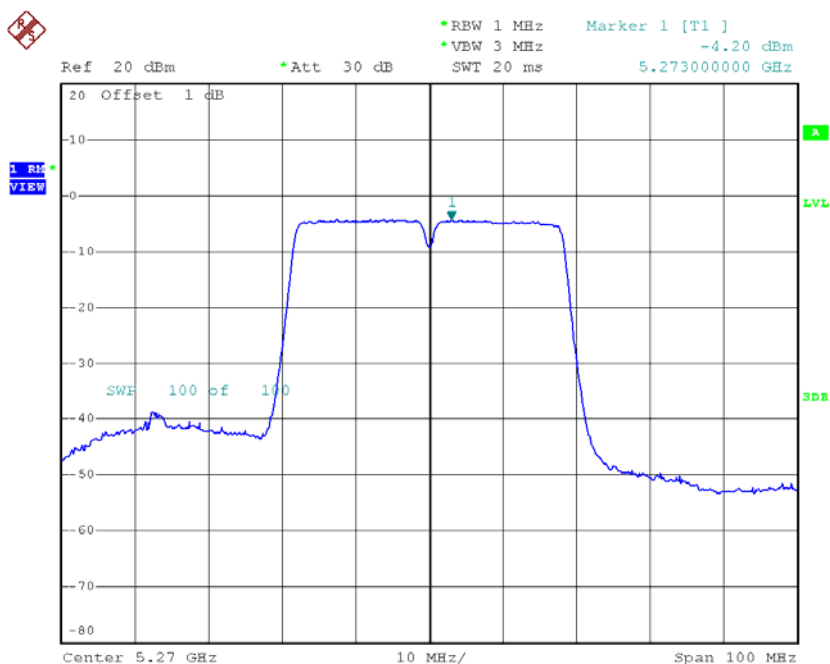

Date: 5.MAY.2015 16:31:48


CH62

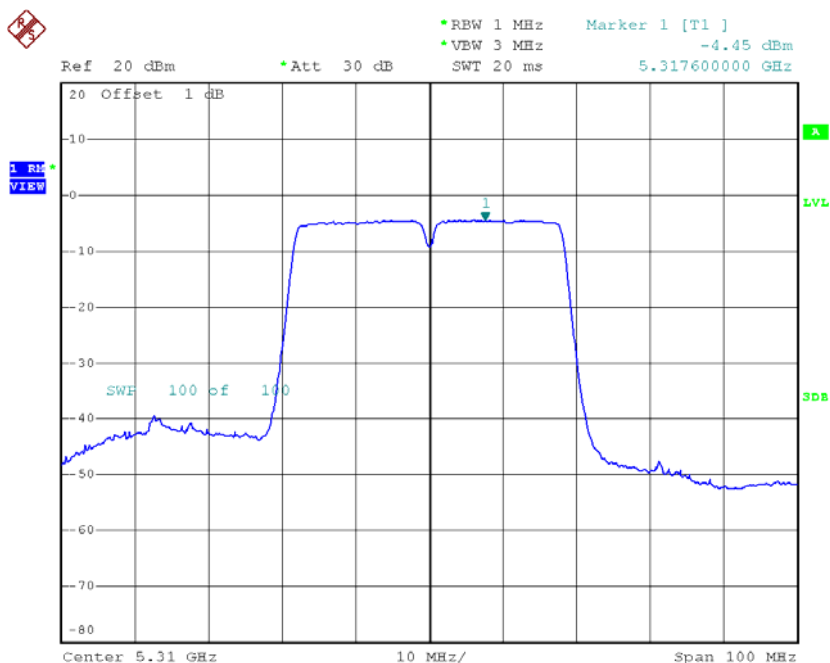

Date: 5.MAY.2015 16:32:54

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-8.14	0.66	-7.48	11.00

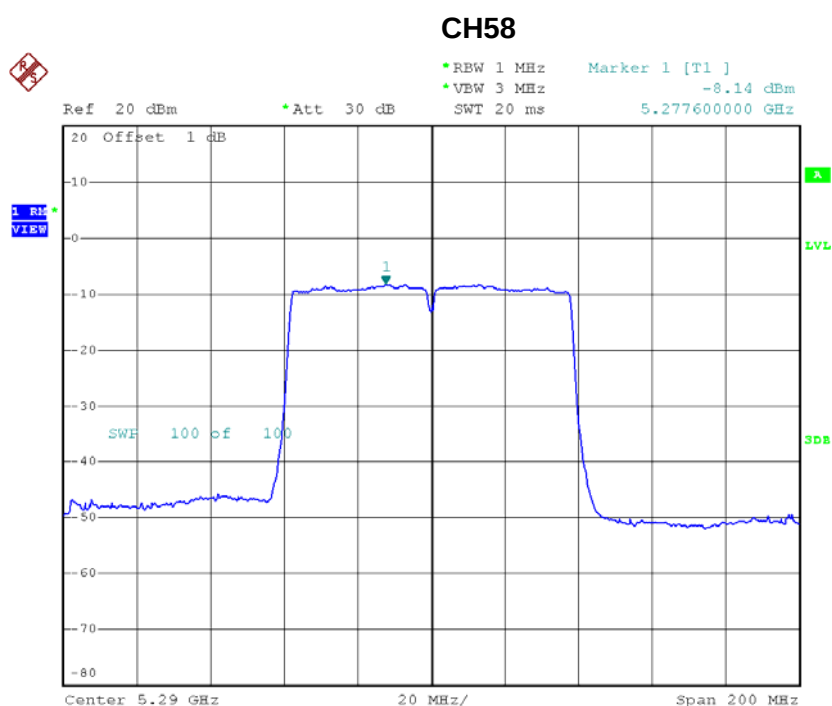


Date: 5.MAY.2015 16:35:07

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-1.20	0.11	-1.09	11.00
CH116	5580	-2.06	0.11	-1.95	11.00
CH140	5700	-2.13	0.11	-2.02	11.00

CH100

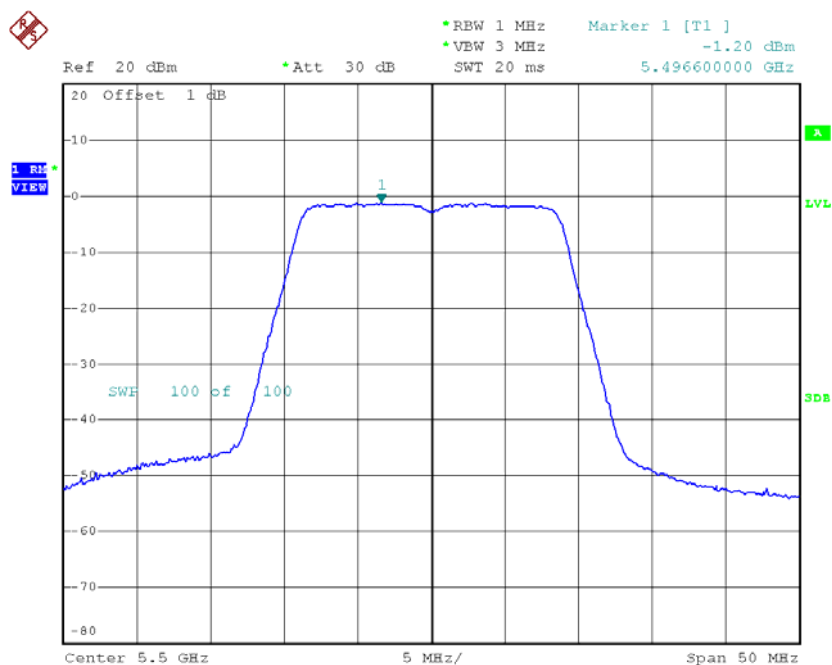


Date: 5.MAY.2015 16:53:55

CH116

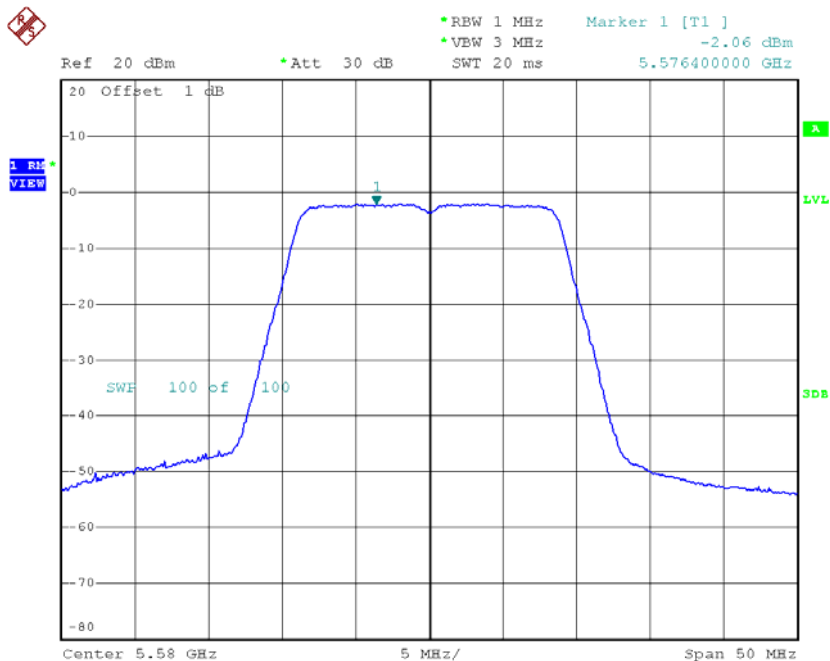

Date: 5.MAY.2015 16:55:17

CH140

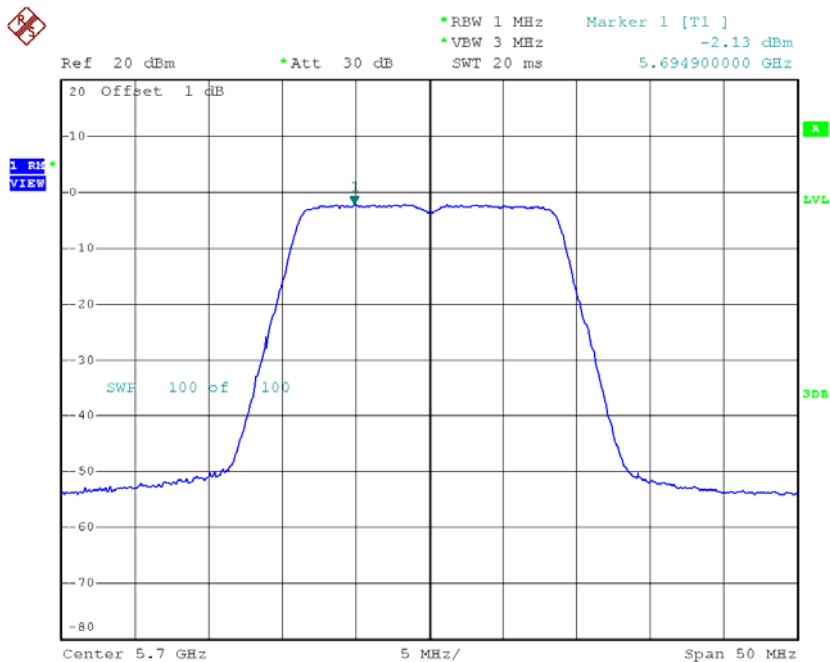


Date: 5.MAY.2015 16:56:23

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-4.97	0.29	-4.68	11.00
CH110	5550	-5.01	0.29	-4.72	11.00
CH134	5670	-6.30	0.29	-6.01	11.00

CH102

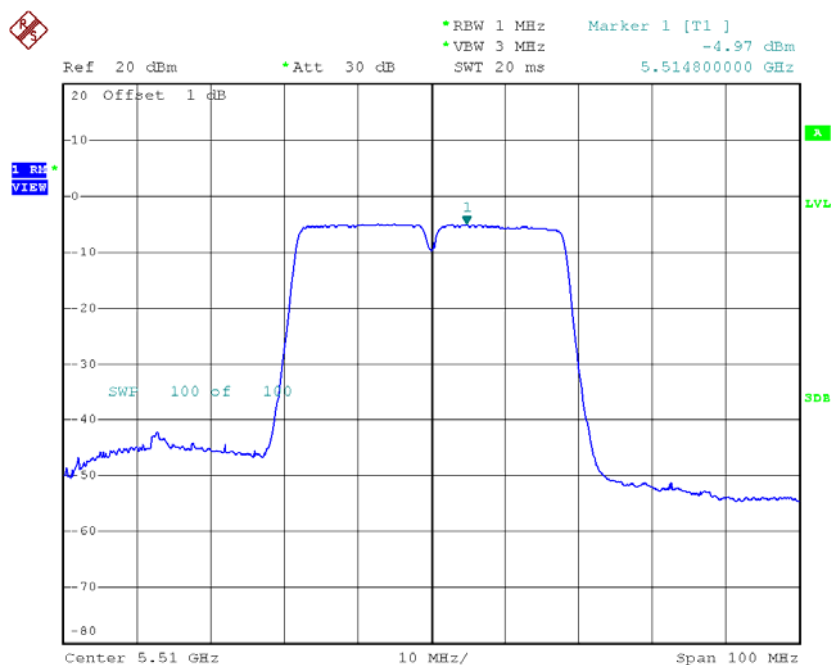


Date: 5.MAY.2015 17:01:37

CH110

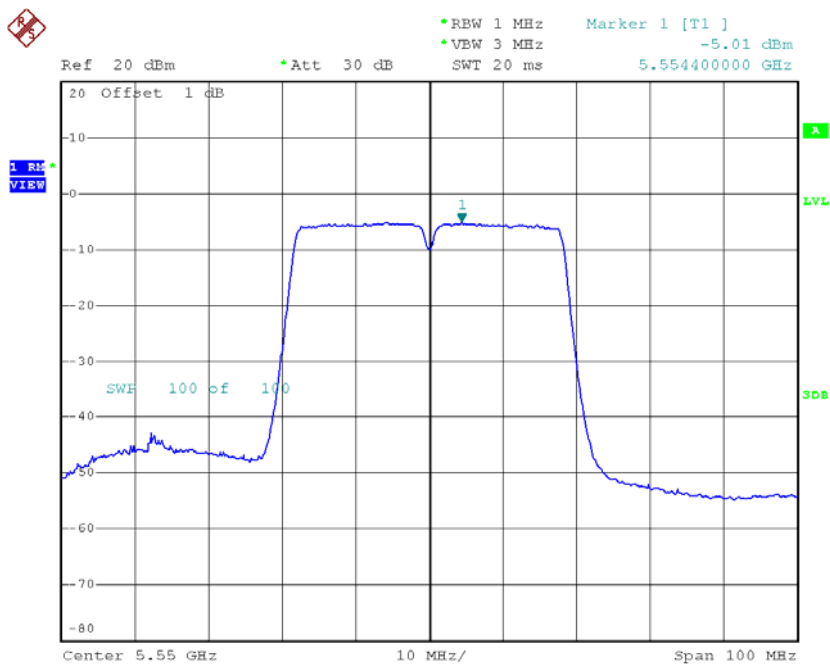

Date: 5.MAY.2015 17:02:53

CH134

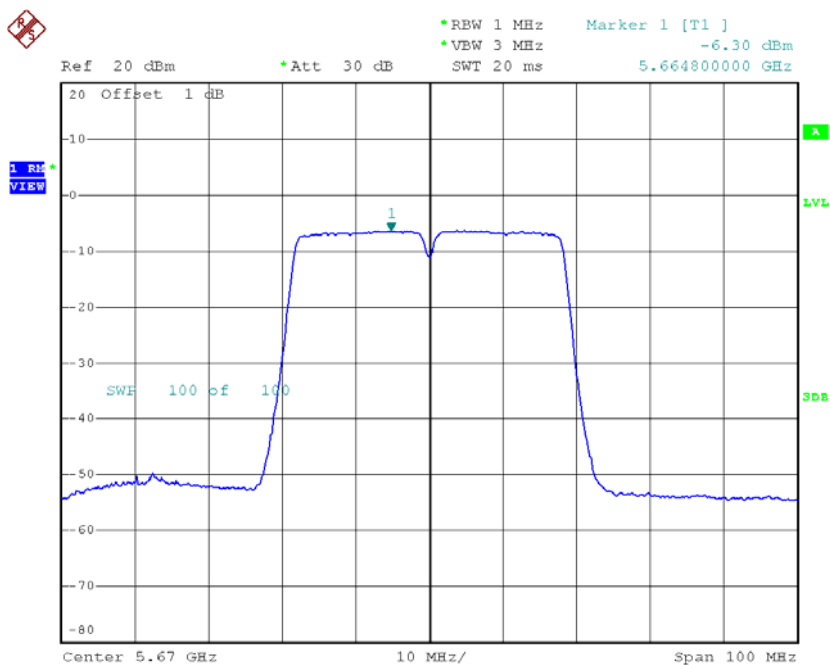


Date: 5.MAY.2015 17:03:37

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-6.66	0.66	-6.00	11.00
CH122	5610	-7.78	0.66	-7.12	11.00

CH106

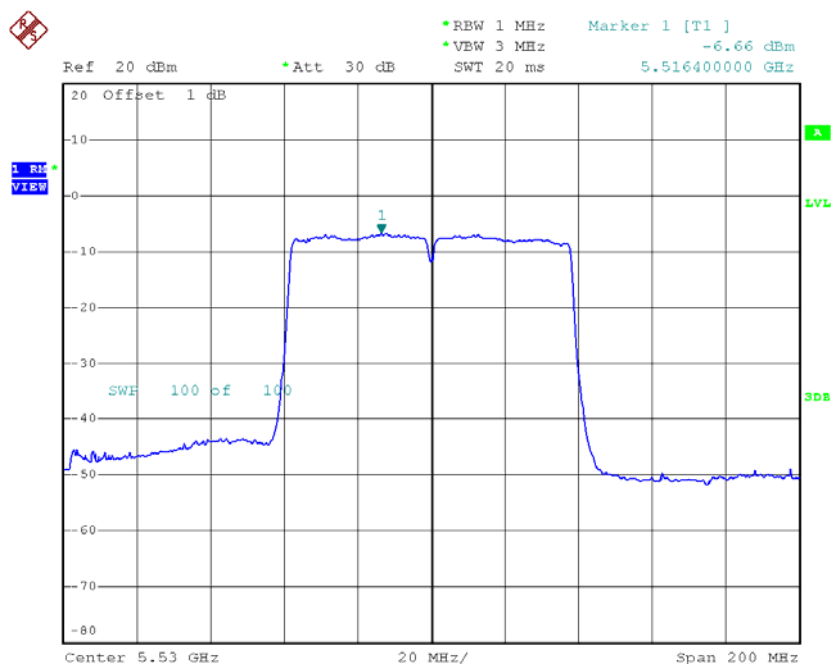

Date: 5.MAY.2015 17:04:45

CH122

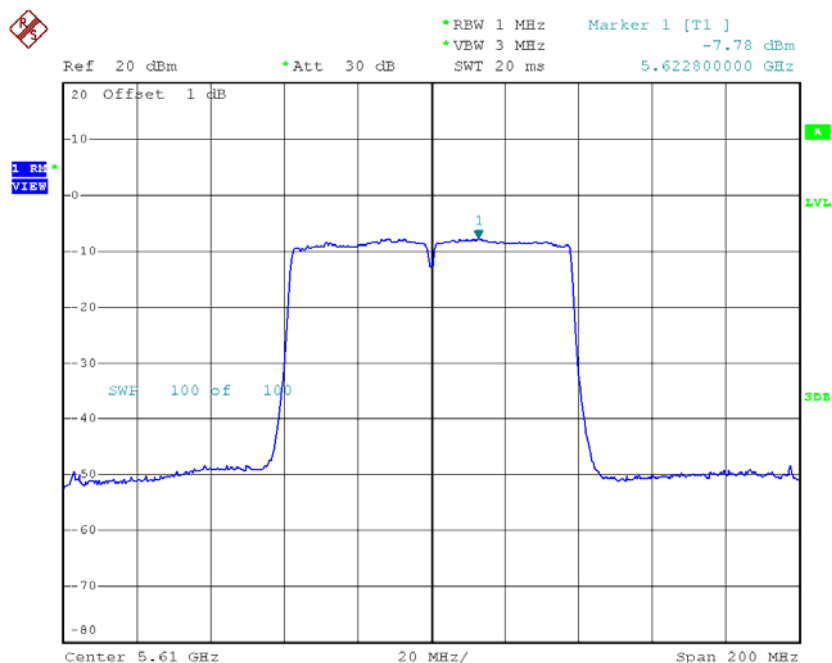


Date: 5.MAY.2015 17:05:57

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	Power Density (dBm/500KHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/500KHz)	Limit (dBm/500KHz)
CH149	5745	-4.35	0.11	-4.24	30.00
CH157	5785	-4.58	0.11	-4.47	30.00
CH165	5825	-5.18	0.11	-5.07	30.00

TX CH149

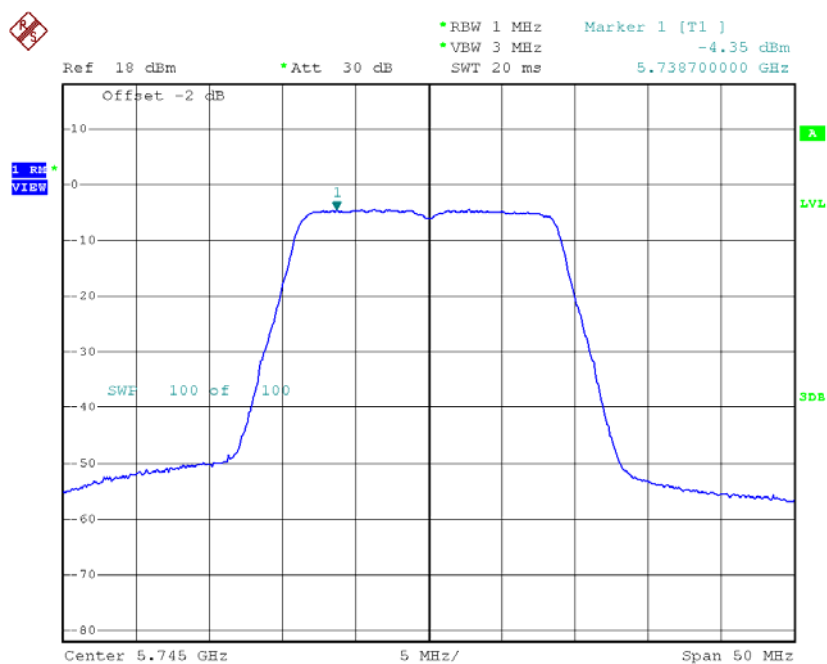


Date: 5.MAY.2015 17:19:44

TX CH157

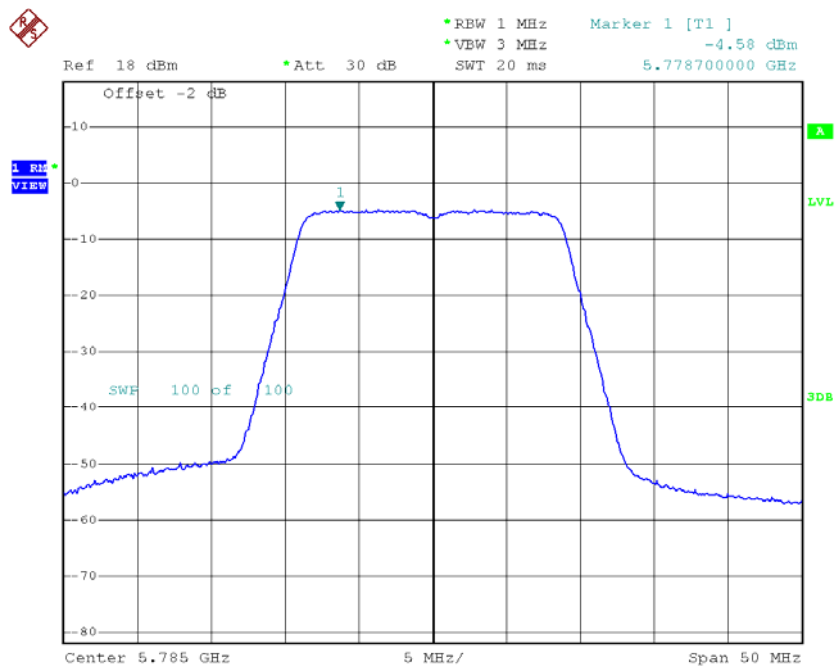

Date: 5.MAY.2015 17:21:05

TX CH165

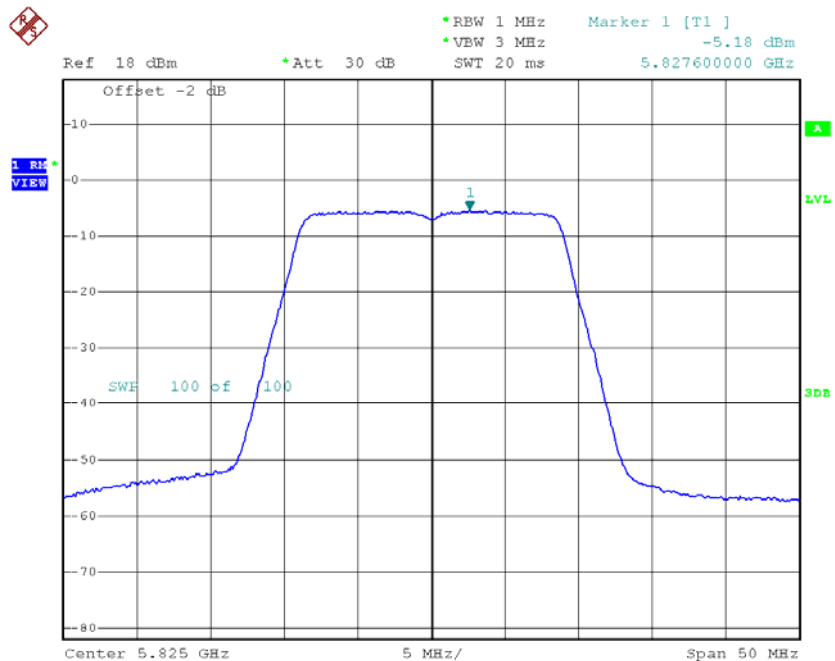


Date: 5.MAY.2015 17:21:46

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	Power Density (dBm/500KHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/500KHz)	Limit (dBm/500KHz)
CH151	5755	-6.52	0.29	-6.23	30.00
CH159	5795	-7.03	0.29	-6.74	30.00

TX CH151

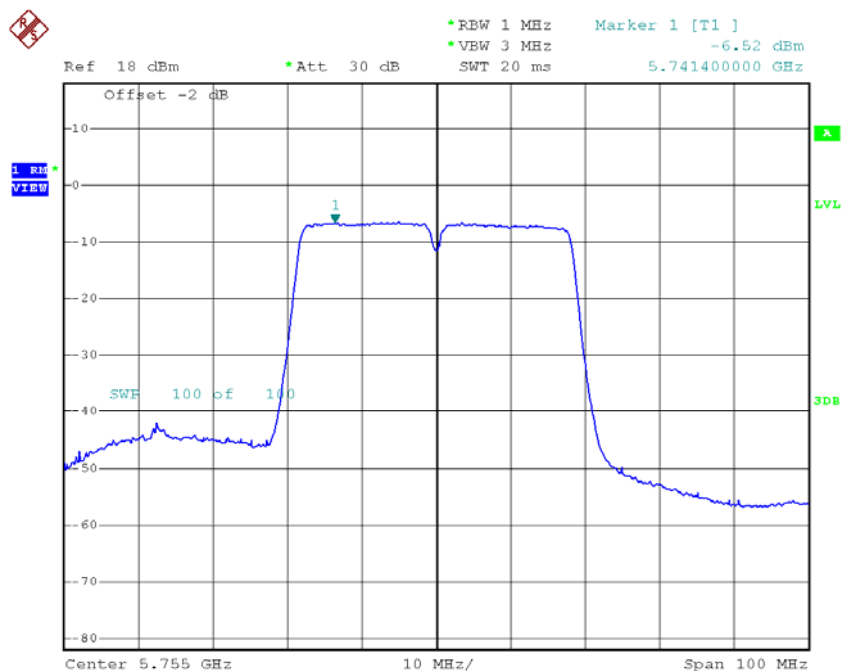

Date: 5.MAY.2015 17:24:38

TX CH159

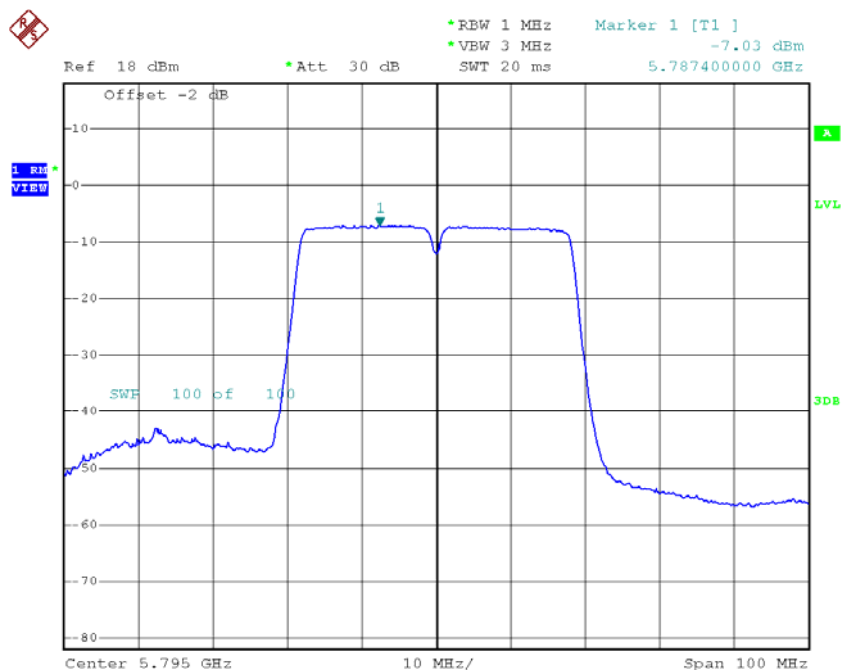


Date: 5.MAY.2015 17:25:49

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	Power Density (dBm/500KHz)	Duty Factor (dBm/MHz)	Power Density+Duty Factor (dBm/500KHz)	Limit (dBm/500KHz)
CH155	5775	-9.53	0.66	-8.87	30.00

TX CH155

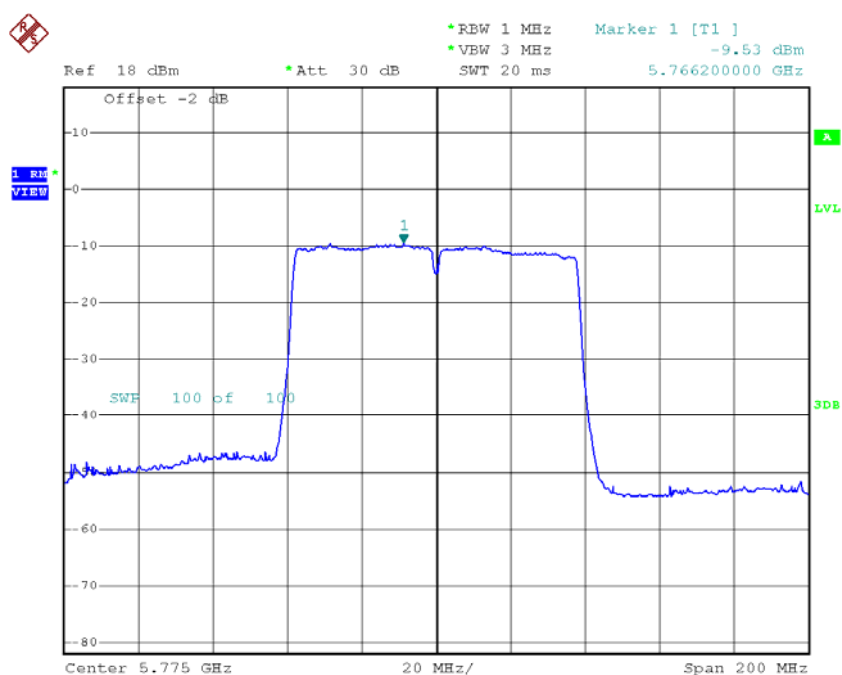

Date: 5.MAY.2015 17:26:57

ATTACHMENTI-FREQUENCY STABILITY

Test Mode:	UNII-1
-------------------	---------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5180.0000
120	5180.0000
108	5180.0000
Max. Deviation (MHz)	0.0000
Max. Deviation (ppm)	0.0000

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5180.0000
-10	5180.0000
5	5180.0000
15	5180.0000
25	5180.0000
35	5180.0000
45	5180.0000
55	5180.0000
Max. Deviation (MHz)	0.0000
Max. Deviation (ppm)	0.0000

Test Mode:	UNII-2A
-------------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5260.0000
120	5260.0000
108	5260.0000
Max. Deviation (MHz)	0.0000
Max. Deviation (ppm)	0.0000

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5260.0000
-10	5260.0000
5	5260.0000
15	5260.0000
25	5260.0000
35	5260.0000
45	5260.0000
55	5260.0000
Max. Deviation (MHz)	0.0000
Max. Deviation (ppm)	0.0000

Test Mode:	UNII-2C
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5500.0000
120	5500.0000
108	5500.0000
Max. Deviation (MHz)	0.0000
Max. Deviation (ppm)	0.0000

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5500.0000
-10	5500.0000
5	5500.0000
15	5500.0000
25	5500.0000
35	5500.0000
45	5500.0000
55	5500.0000
Max. Deviation (MHz)	0.0000
Max. Deviation (ppm)	0.0000

Test Mode:	UNII-3
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5745.0000
120	5745.0000
108	5745.0000
Max. Deviation (MHz)	0.0000
Max. Deviation (ppm)	0.0000

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5745.0000
-10	5745.0000
5	5745.0000
15	5745.0000
25	5745.0000
35	5745.0000
45	5745.0000
55	5745.0000
Max. Deviation (MHz)	0.0000
Max. Deviation (ppm)	0.0000